

summary for network N31T

timeperiod chosen: from 2025-01-01-00:00:00 until 2025-01-01-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.0 seconds


average fixing percentage with threshold set to 0.3: 77.3 percent

stations available: 7 of 7


station information:

station FUER:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 76.887
station LALA:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 62.306
station LZ01:	antenna: TRM59800.00	SCIS	receiver: TRIMBLE NETR9	height: 52.693
station LZ02:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 58.039
station LZ03:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 314.762
station MASP:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 198.846
station ULP2:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 375.129


Processing rate in network N31T

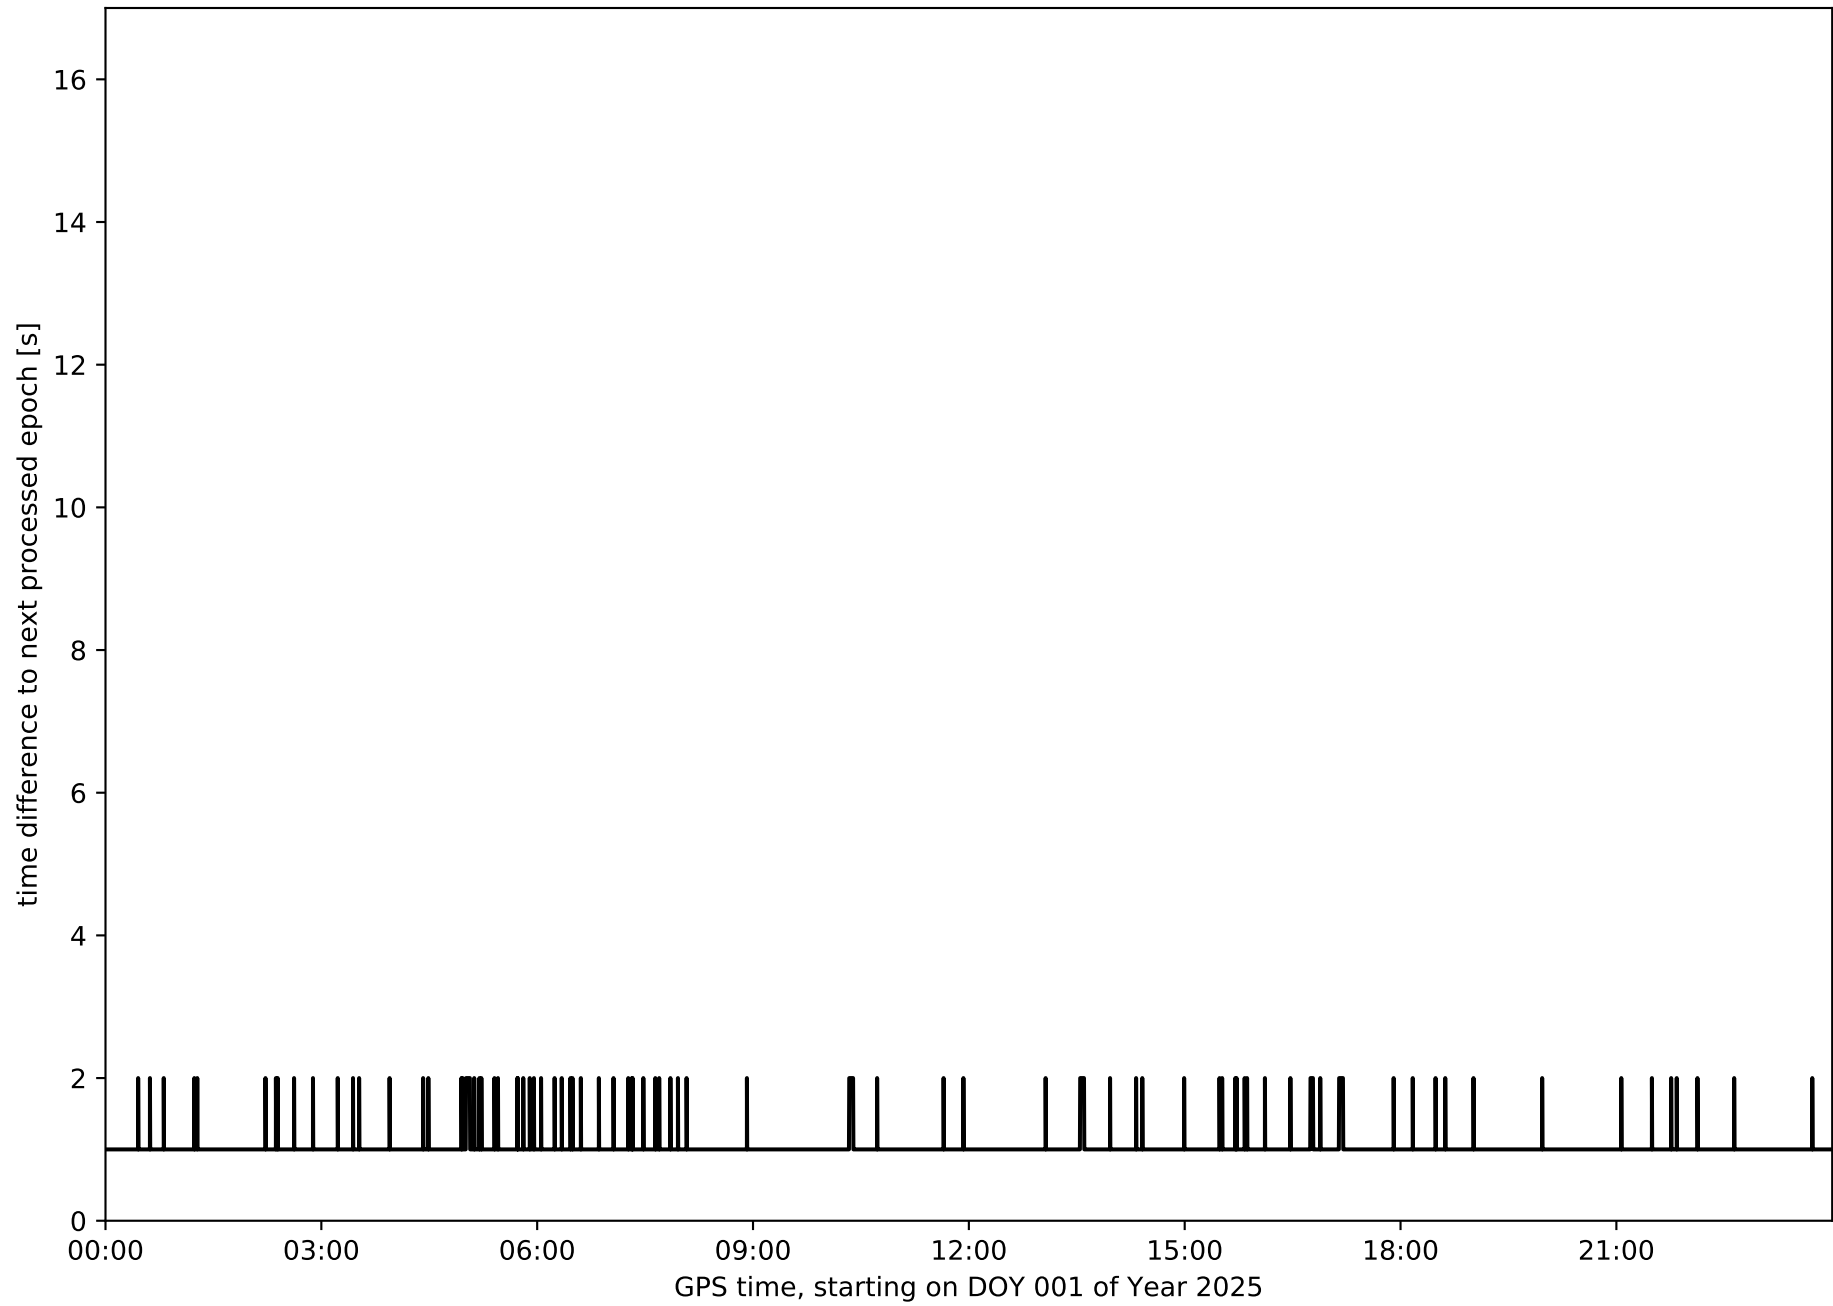


Histogram of the processing rate in network N31T (durations larger 15 seconds neglected)

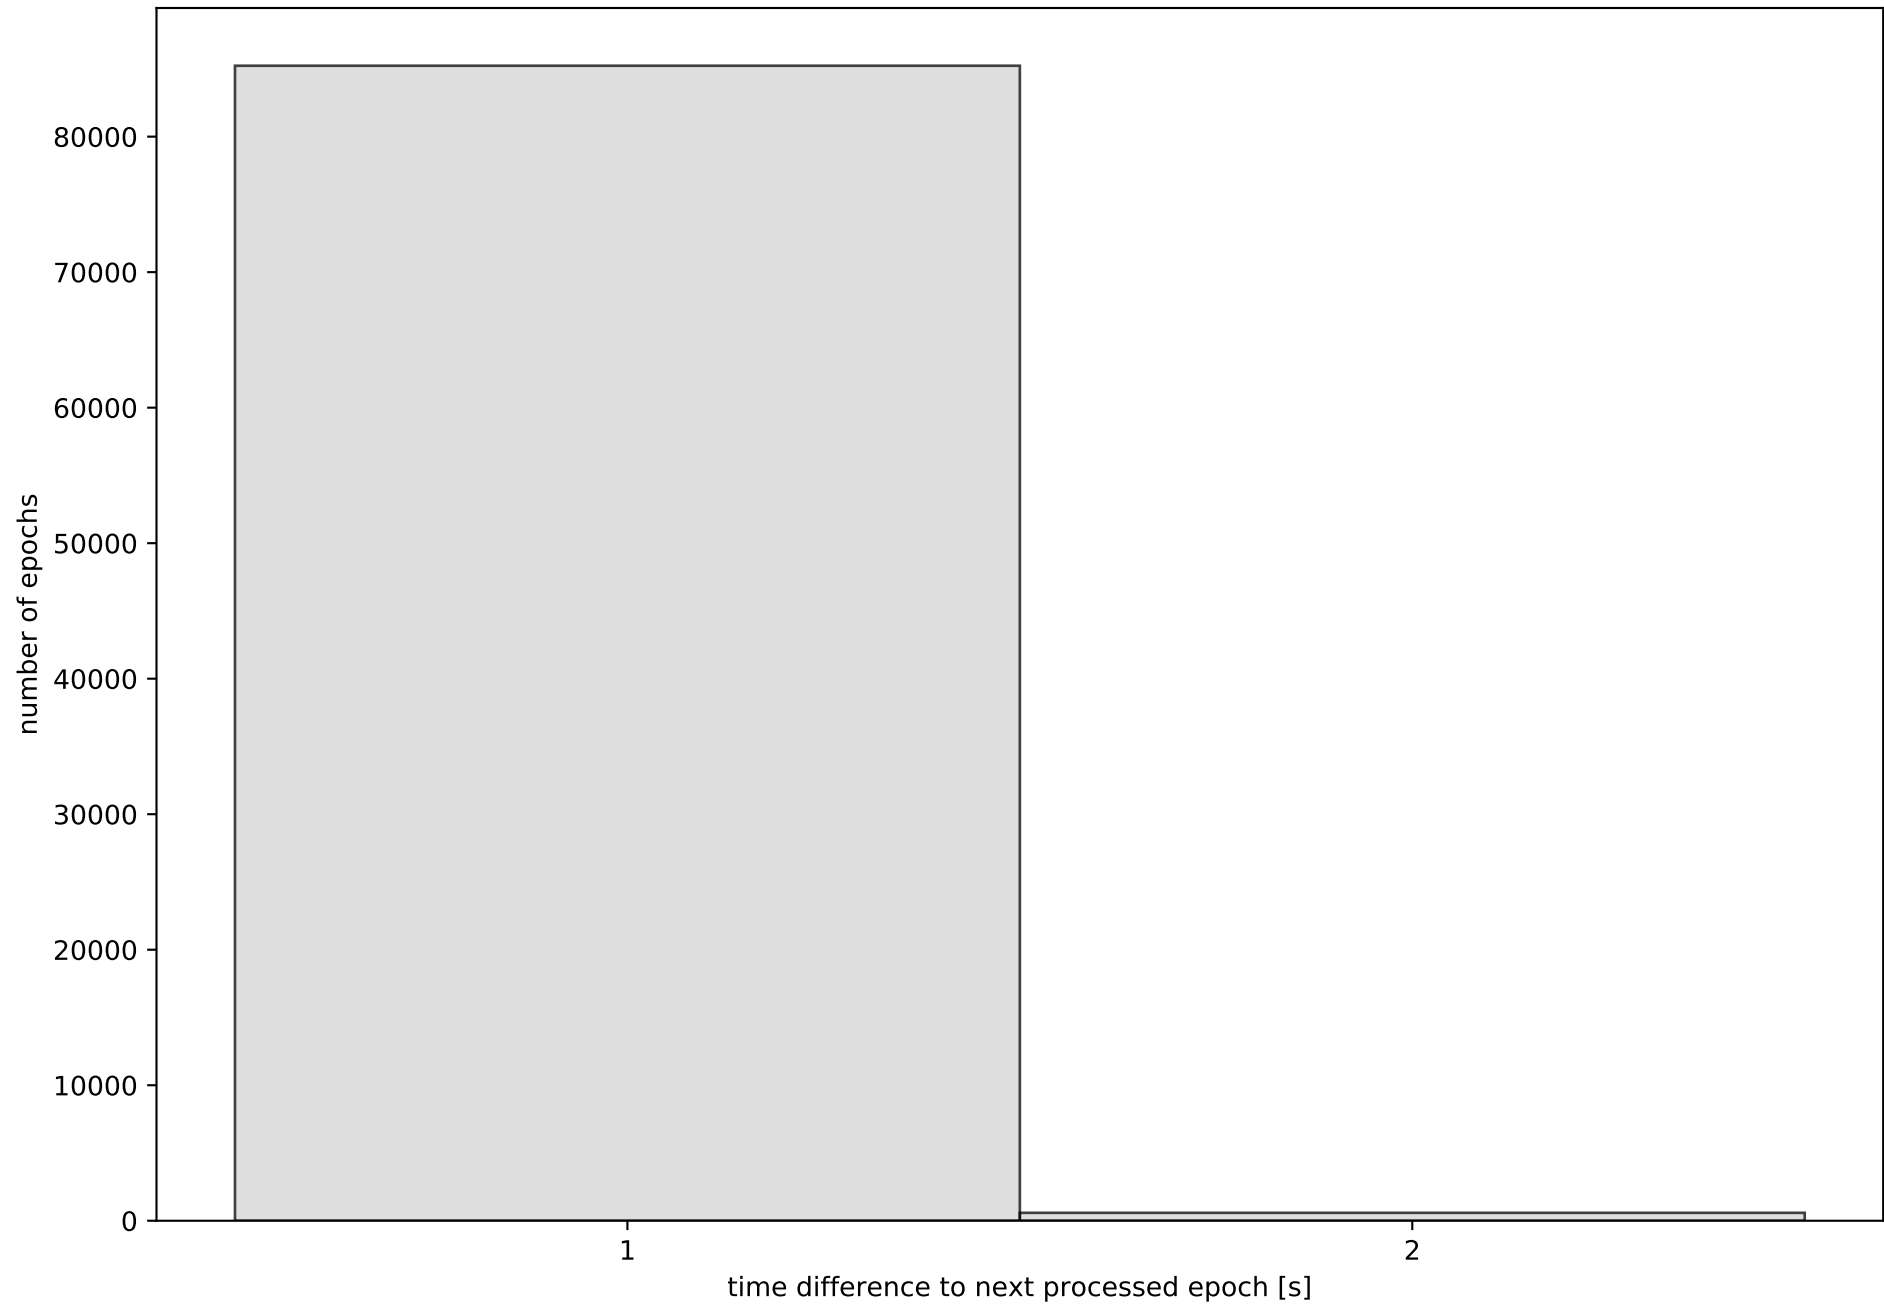


Network N31T with threshold set to 0.3

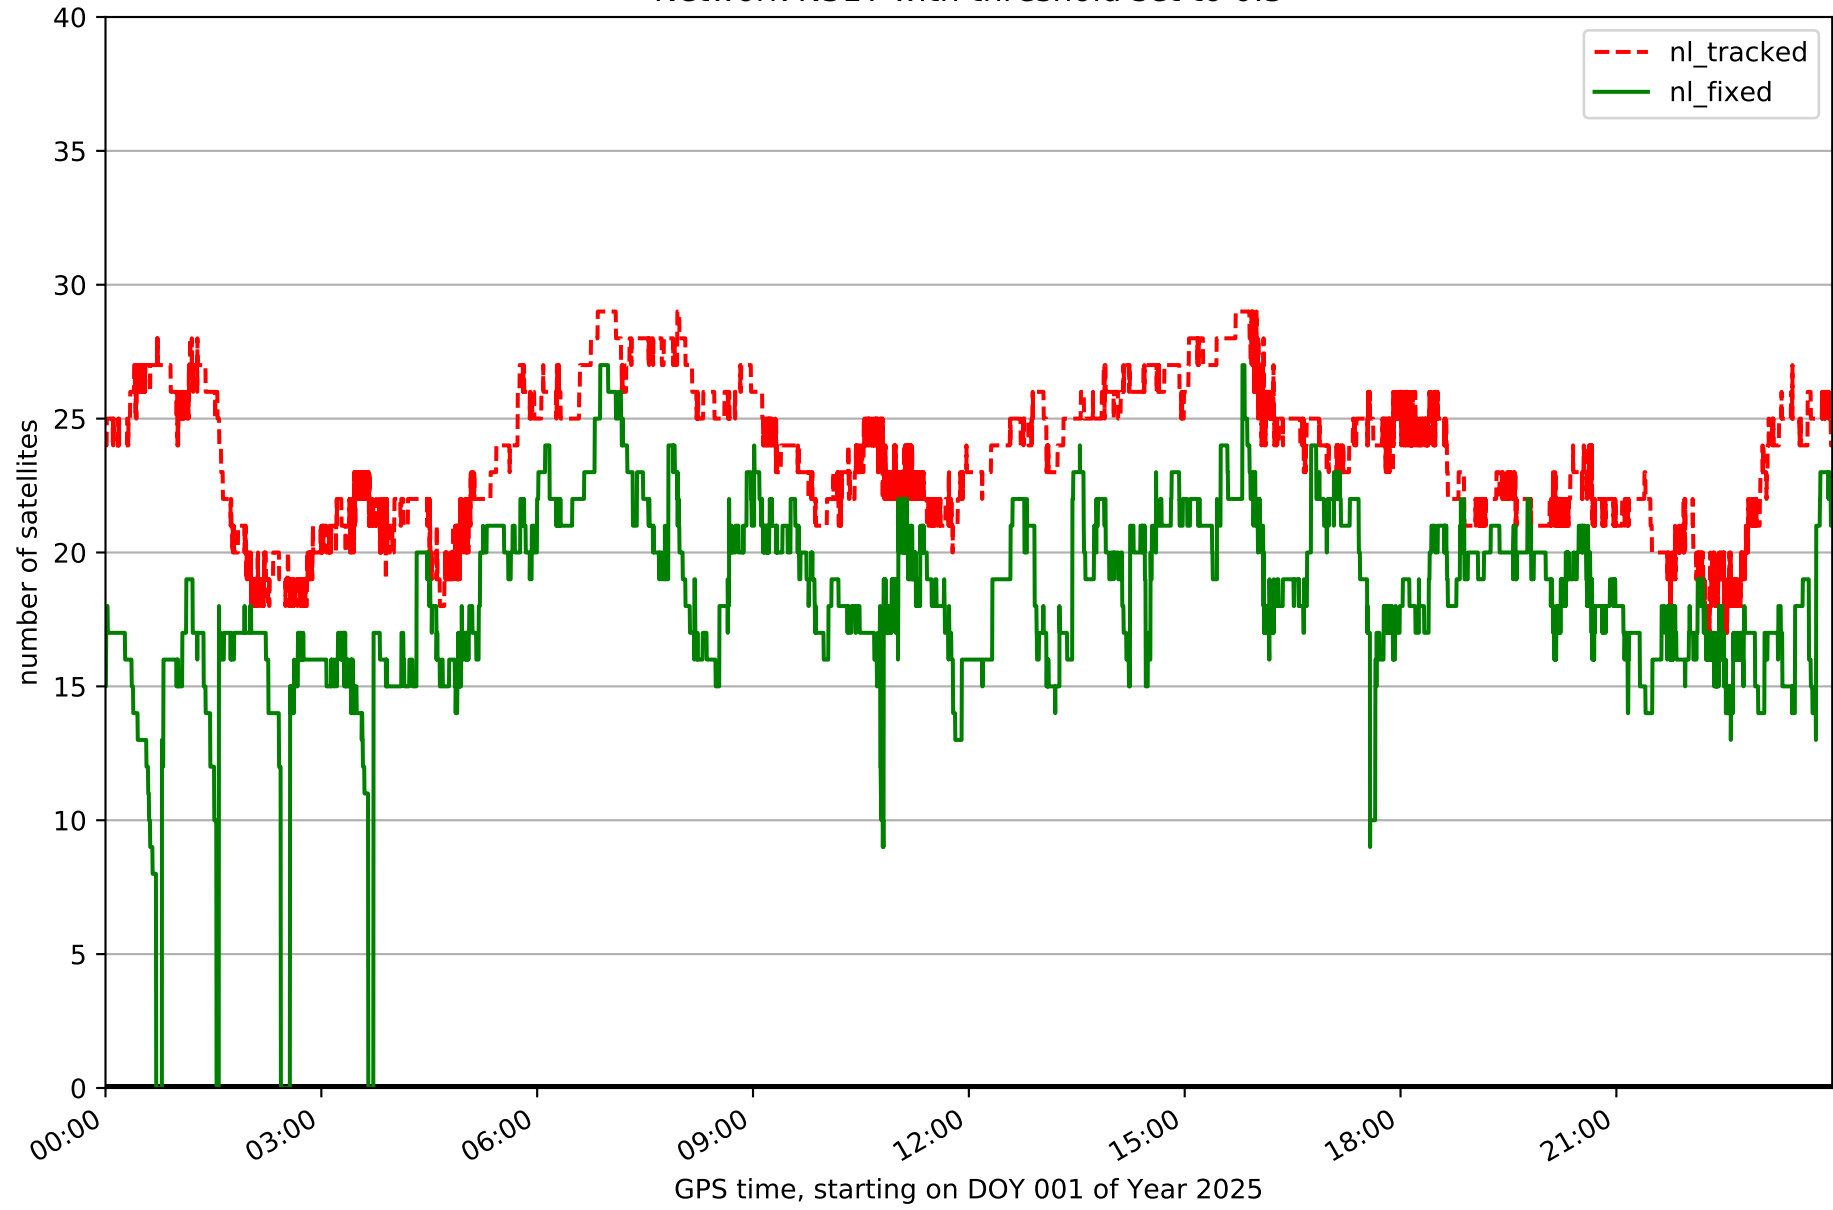


Fixing percentage of satellites in network N31T with threshold set to 0.3

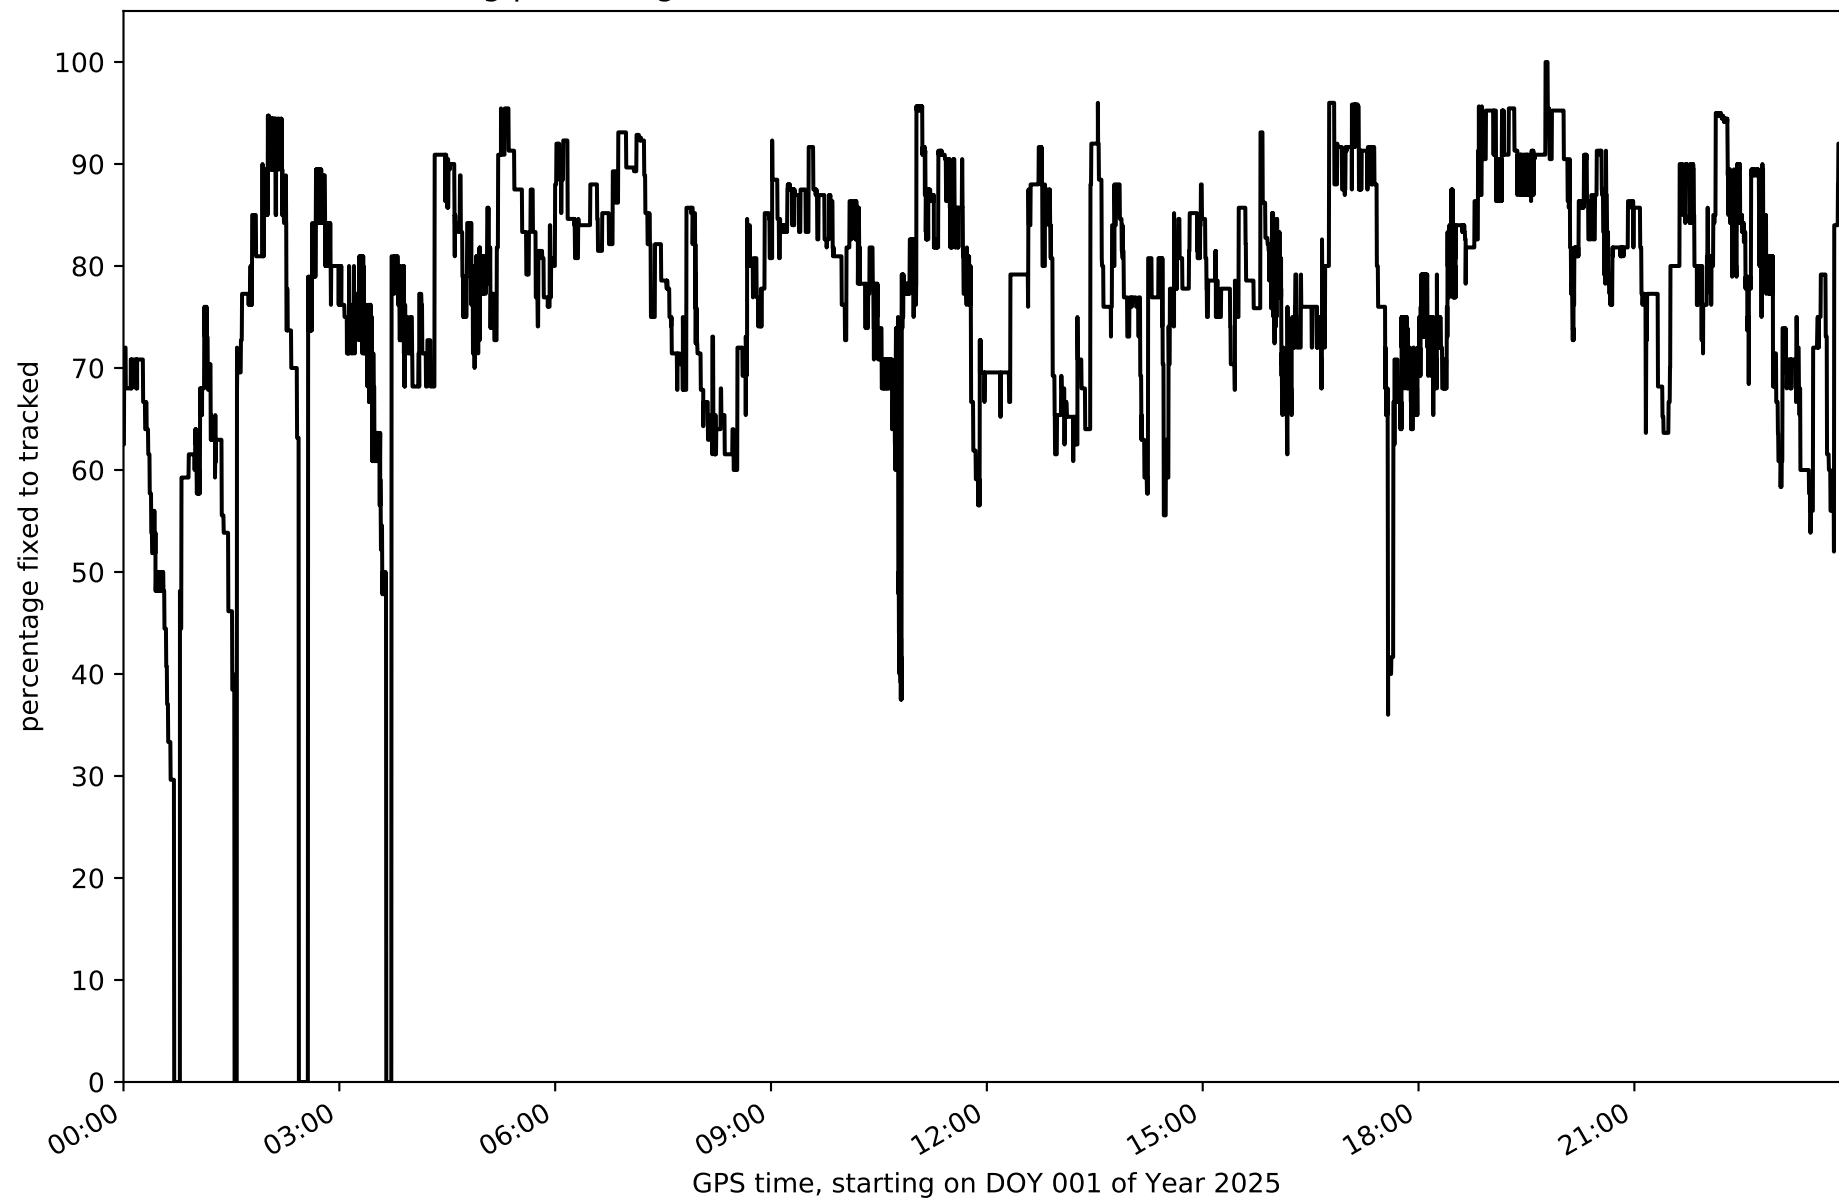


Network N31T - only GPS with threshold set to 0.3

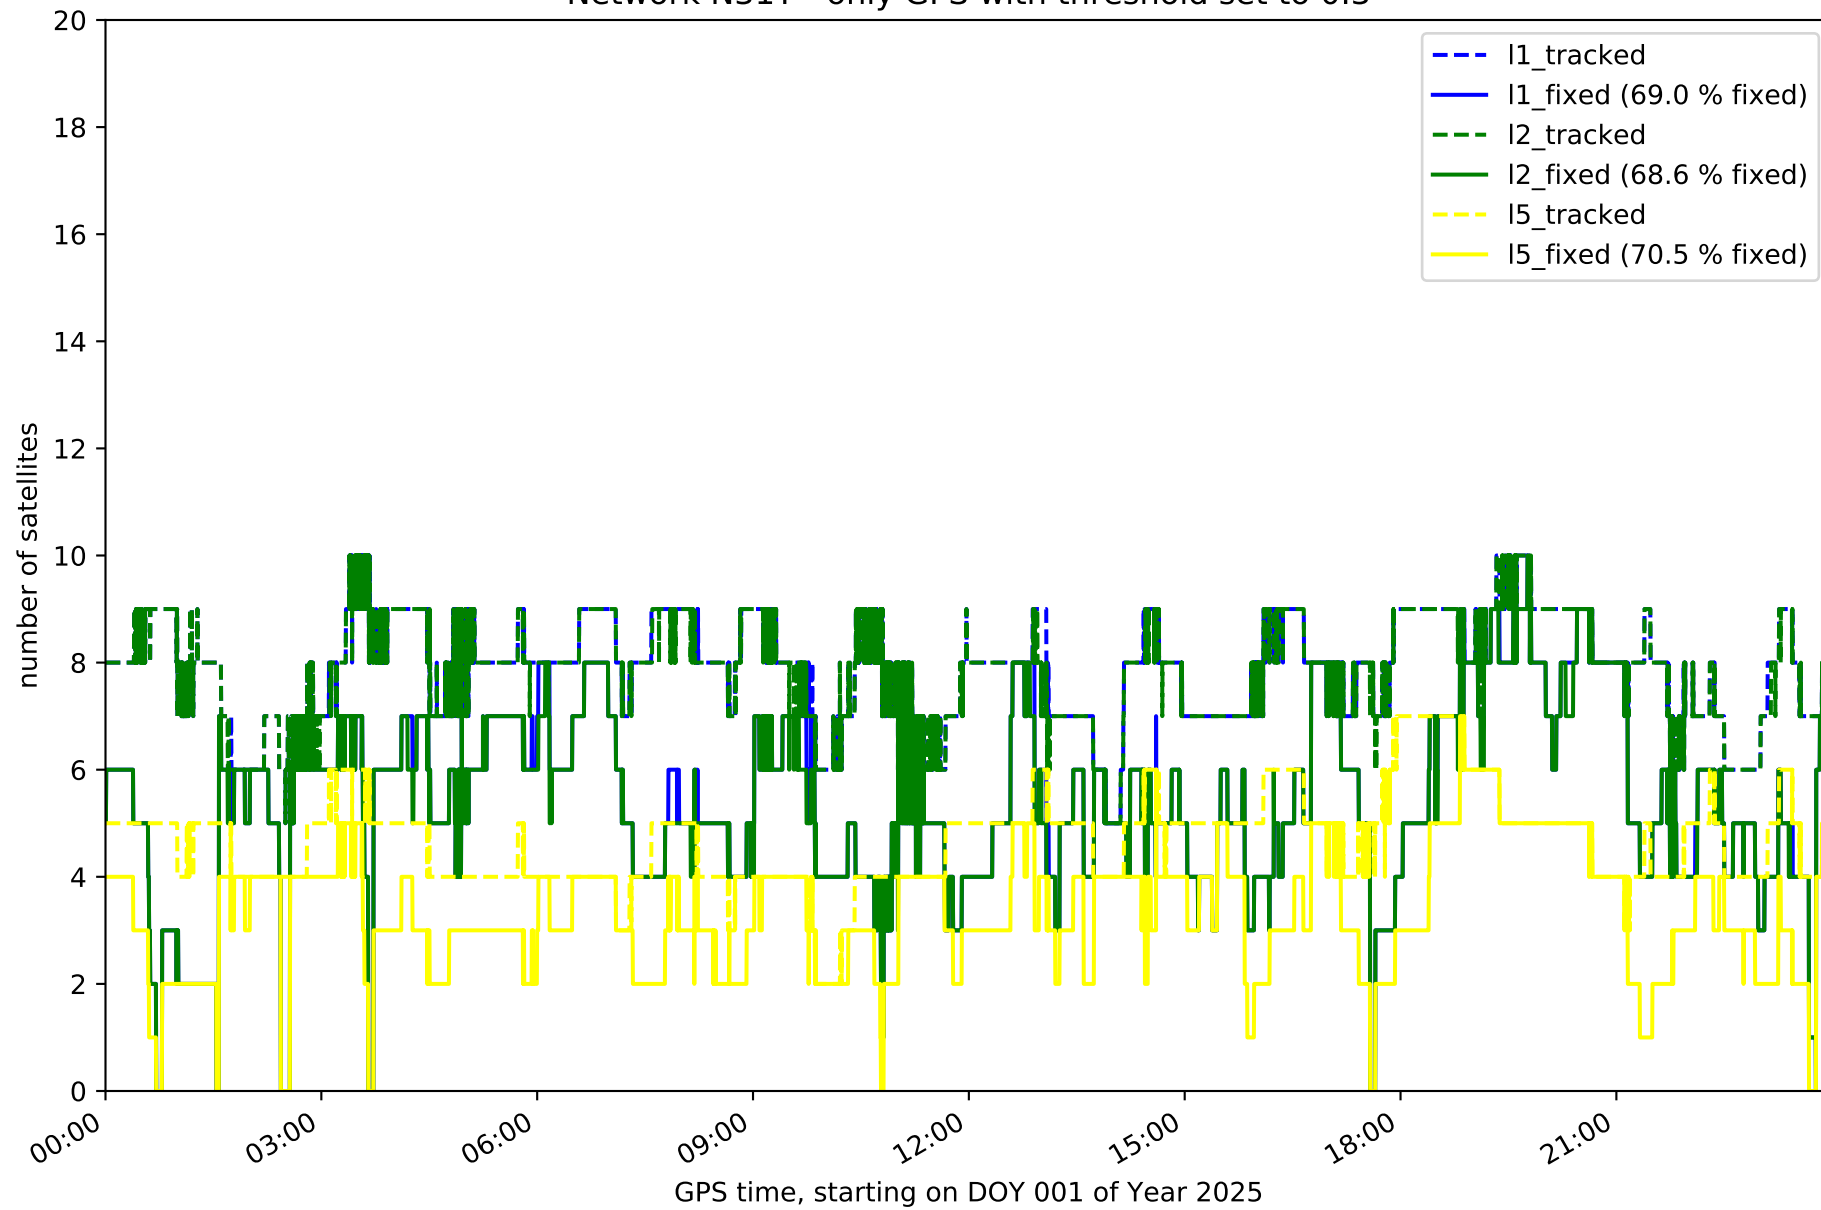


Network N31T - only GLONASS with threshold set to 0.3

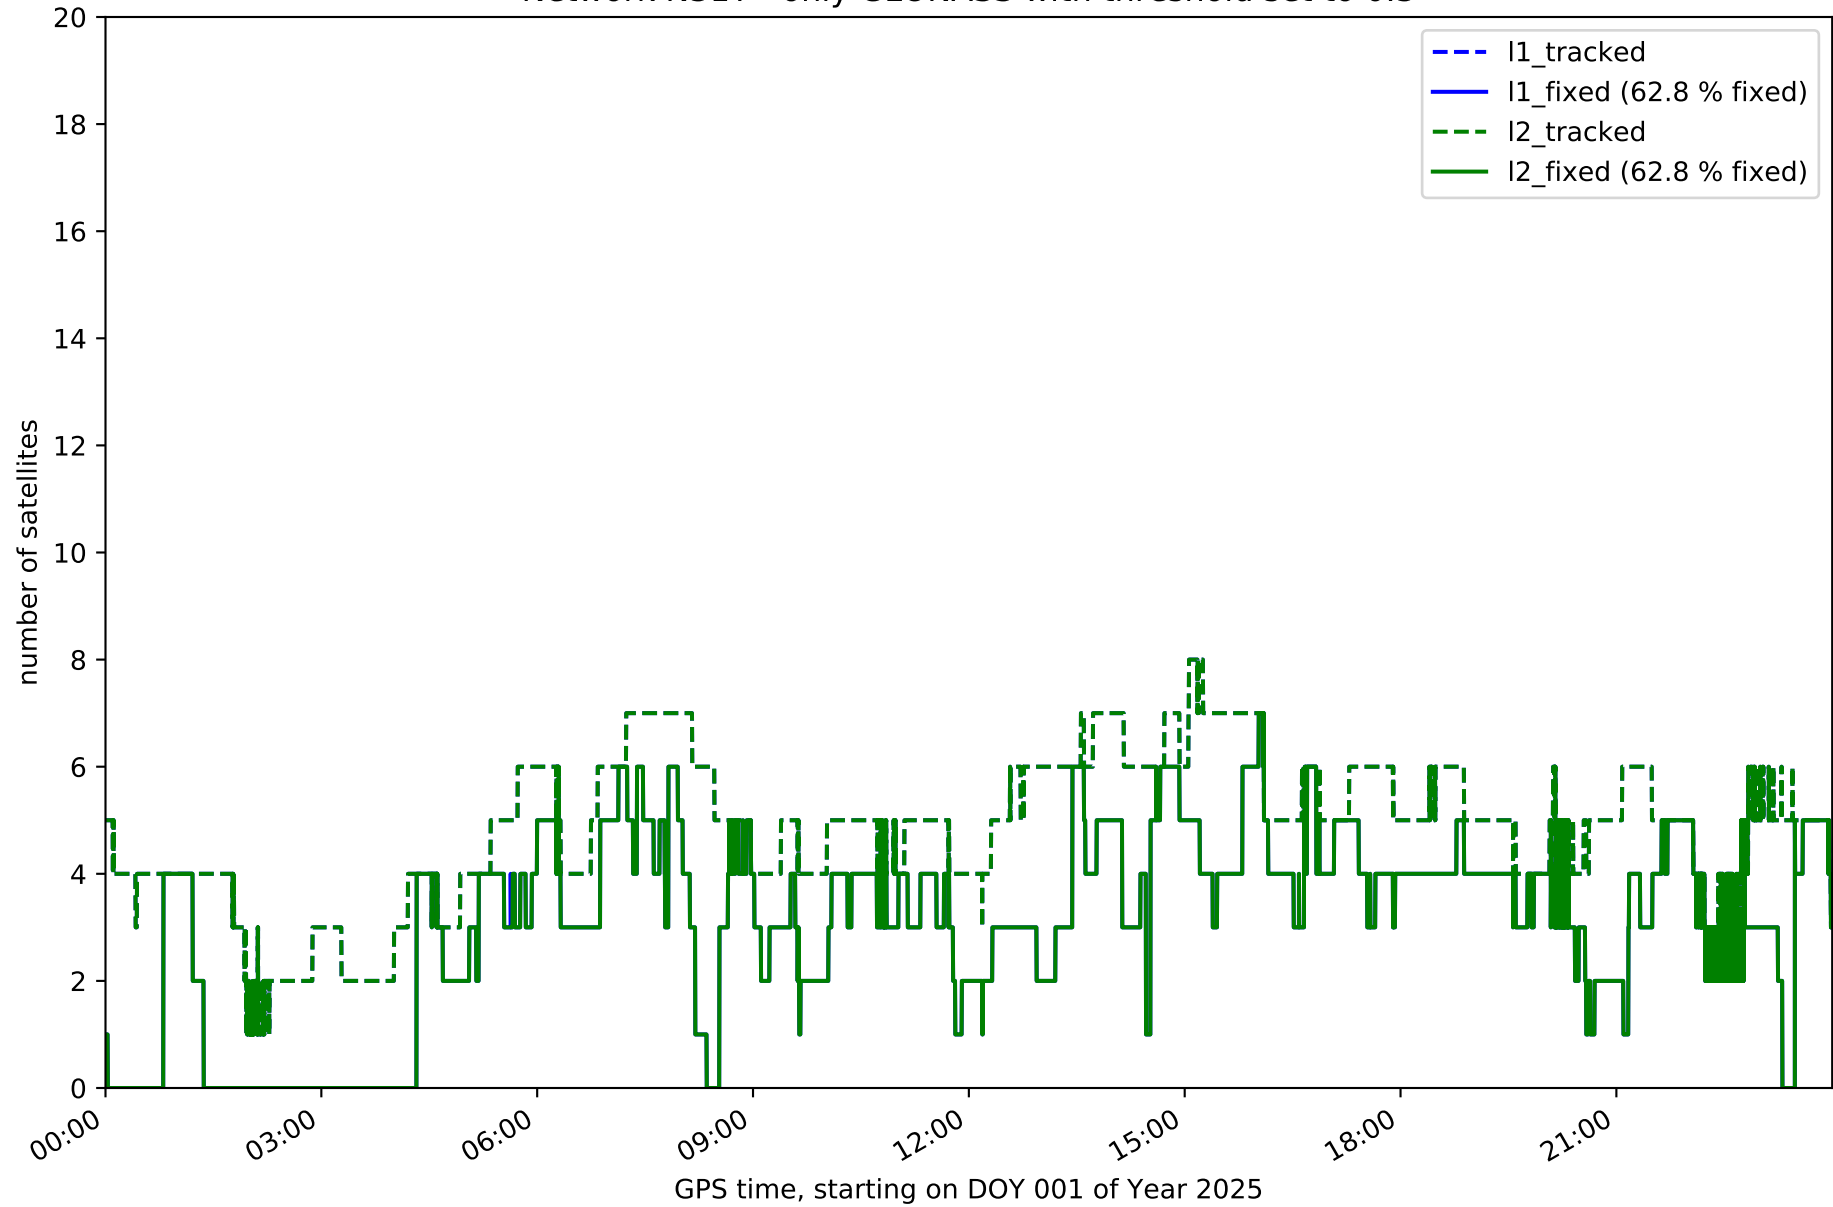


Network N31T - only BDS with threshold set to 0.3

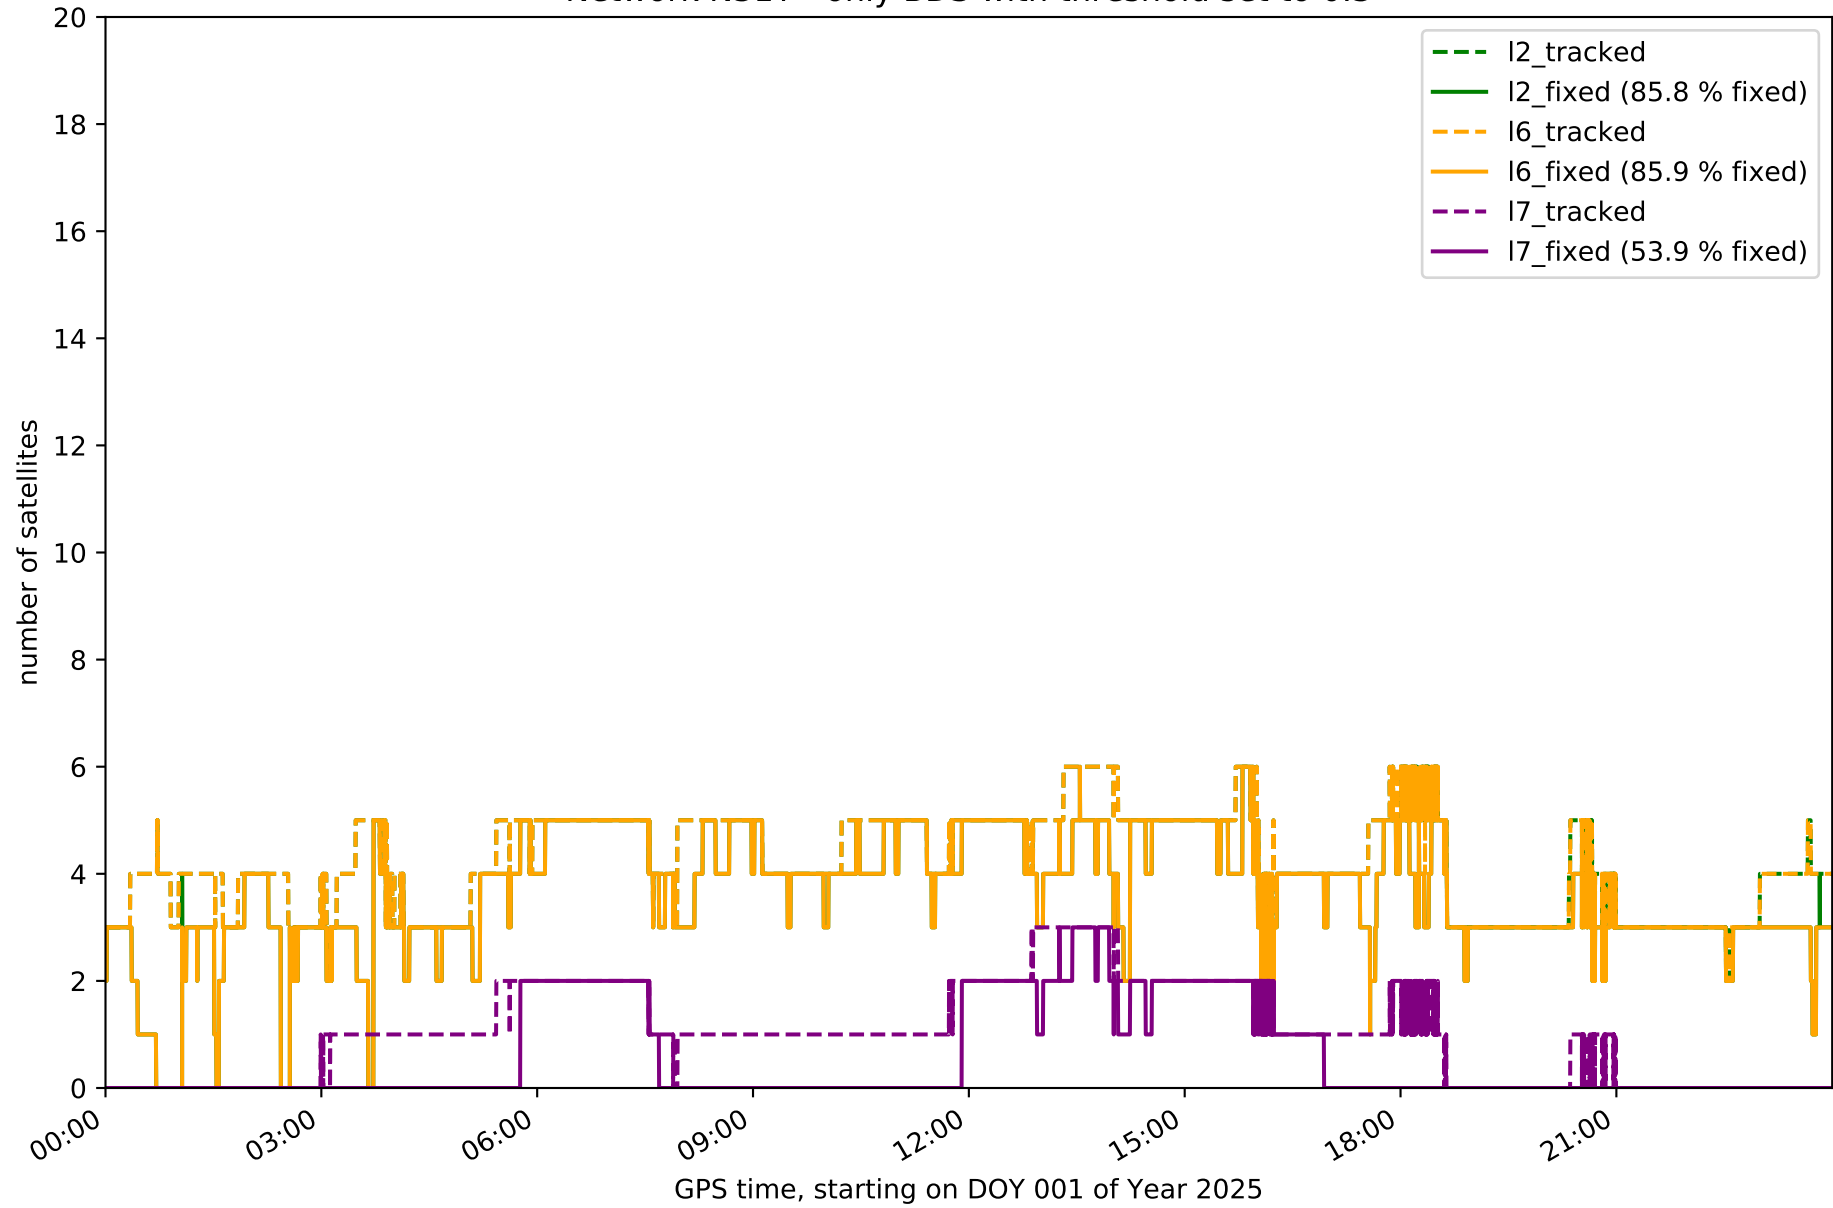


Network N31T - only Galileo with threshold set to 0.3

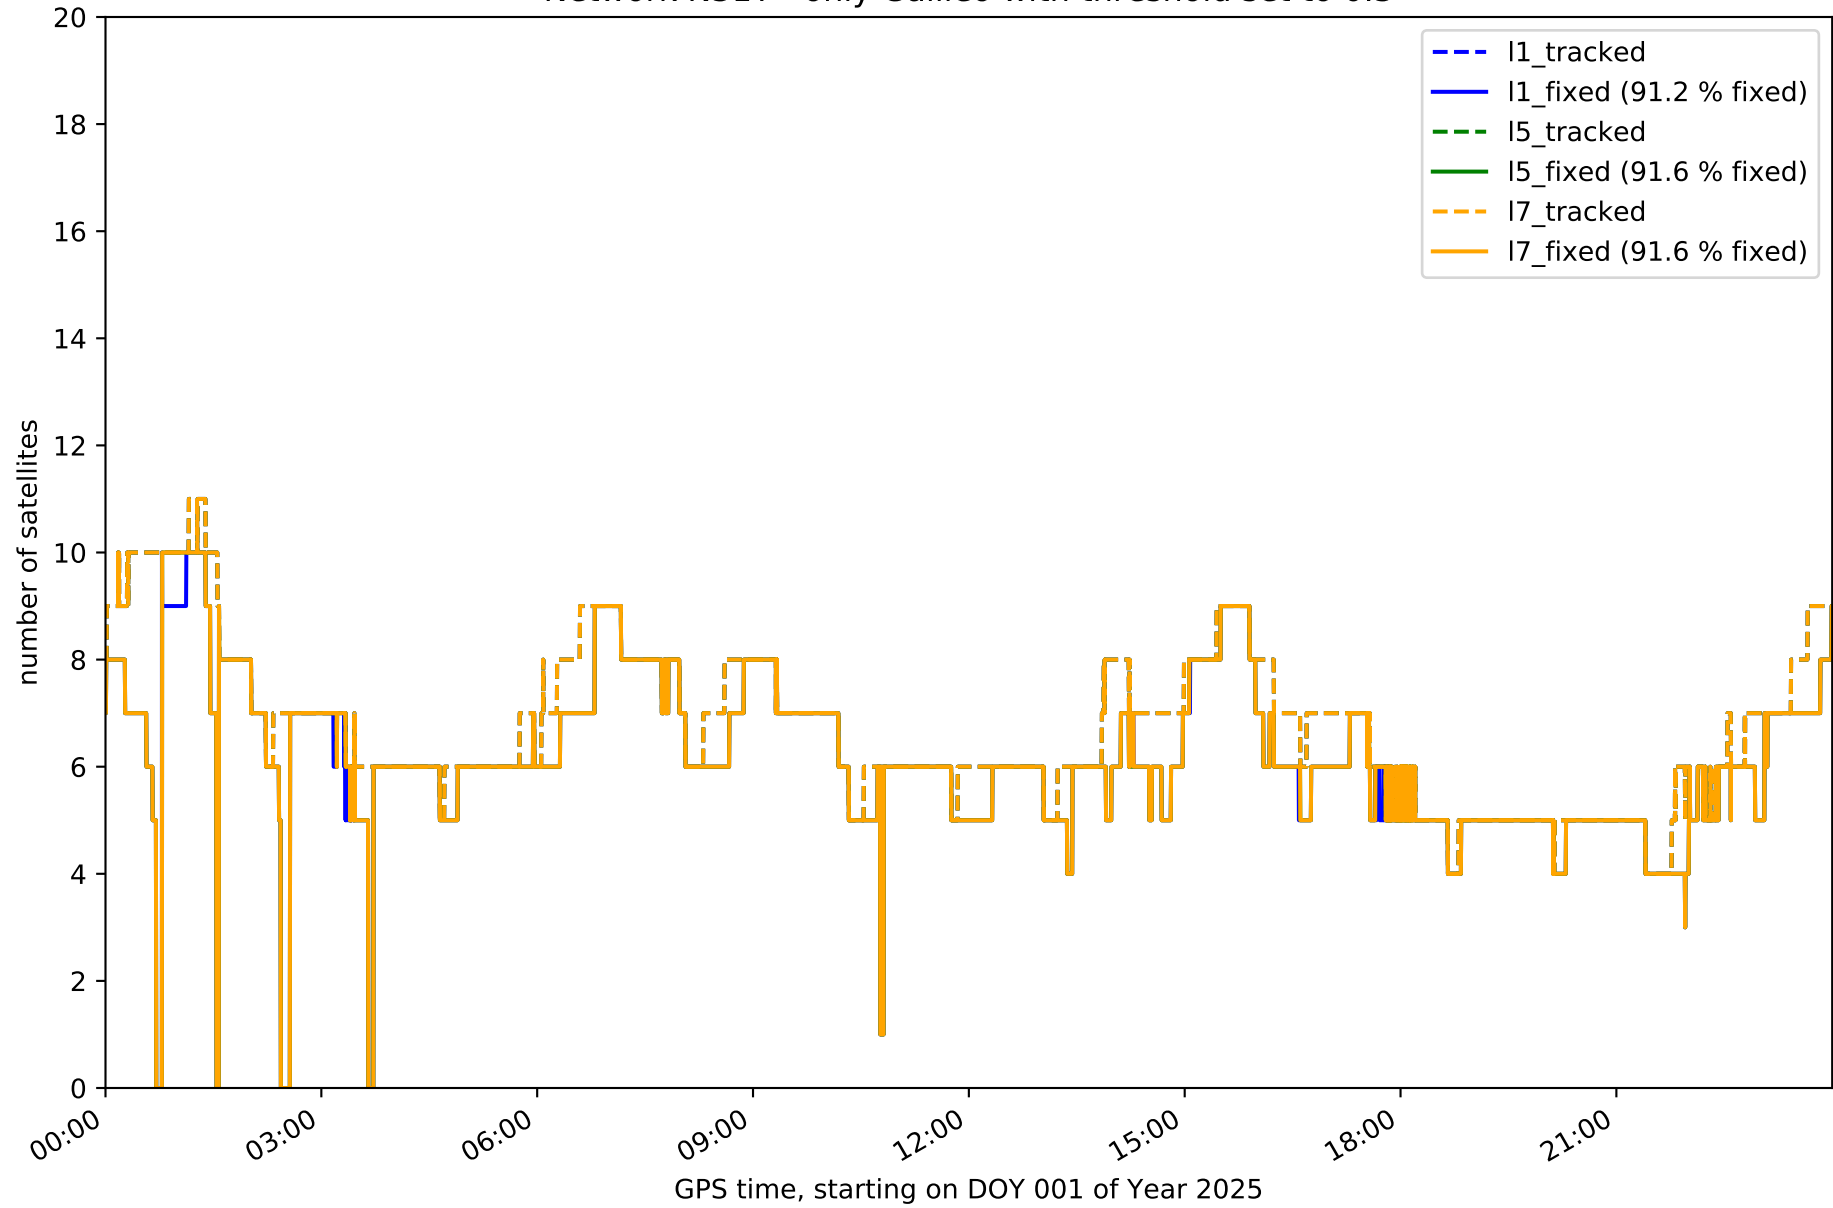


Station FUER in network N31T

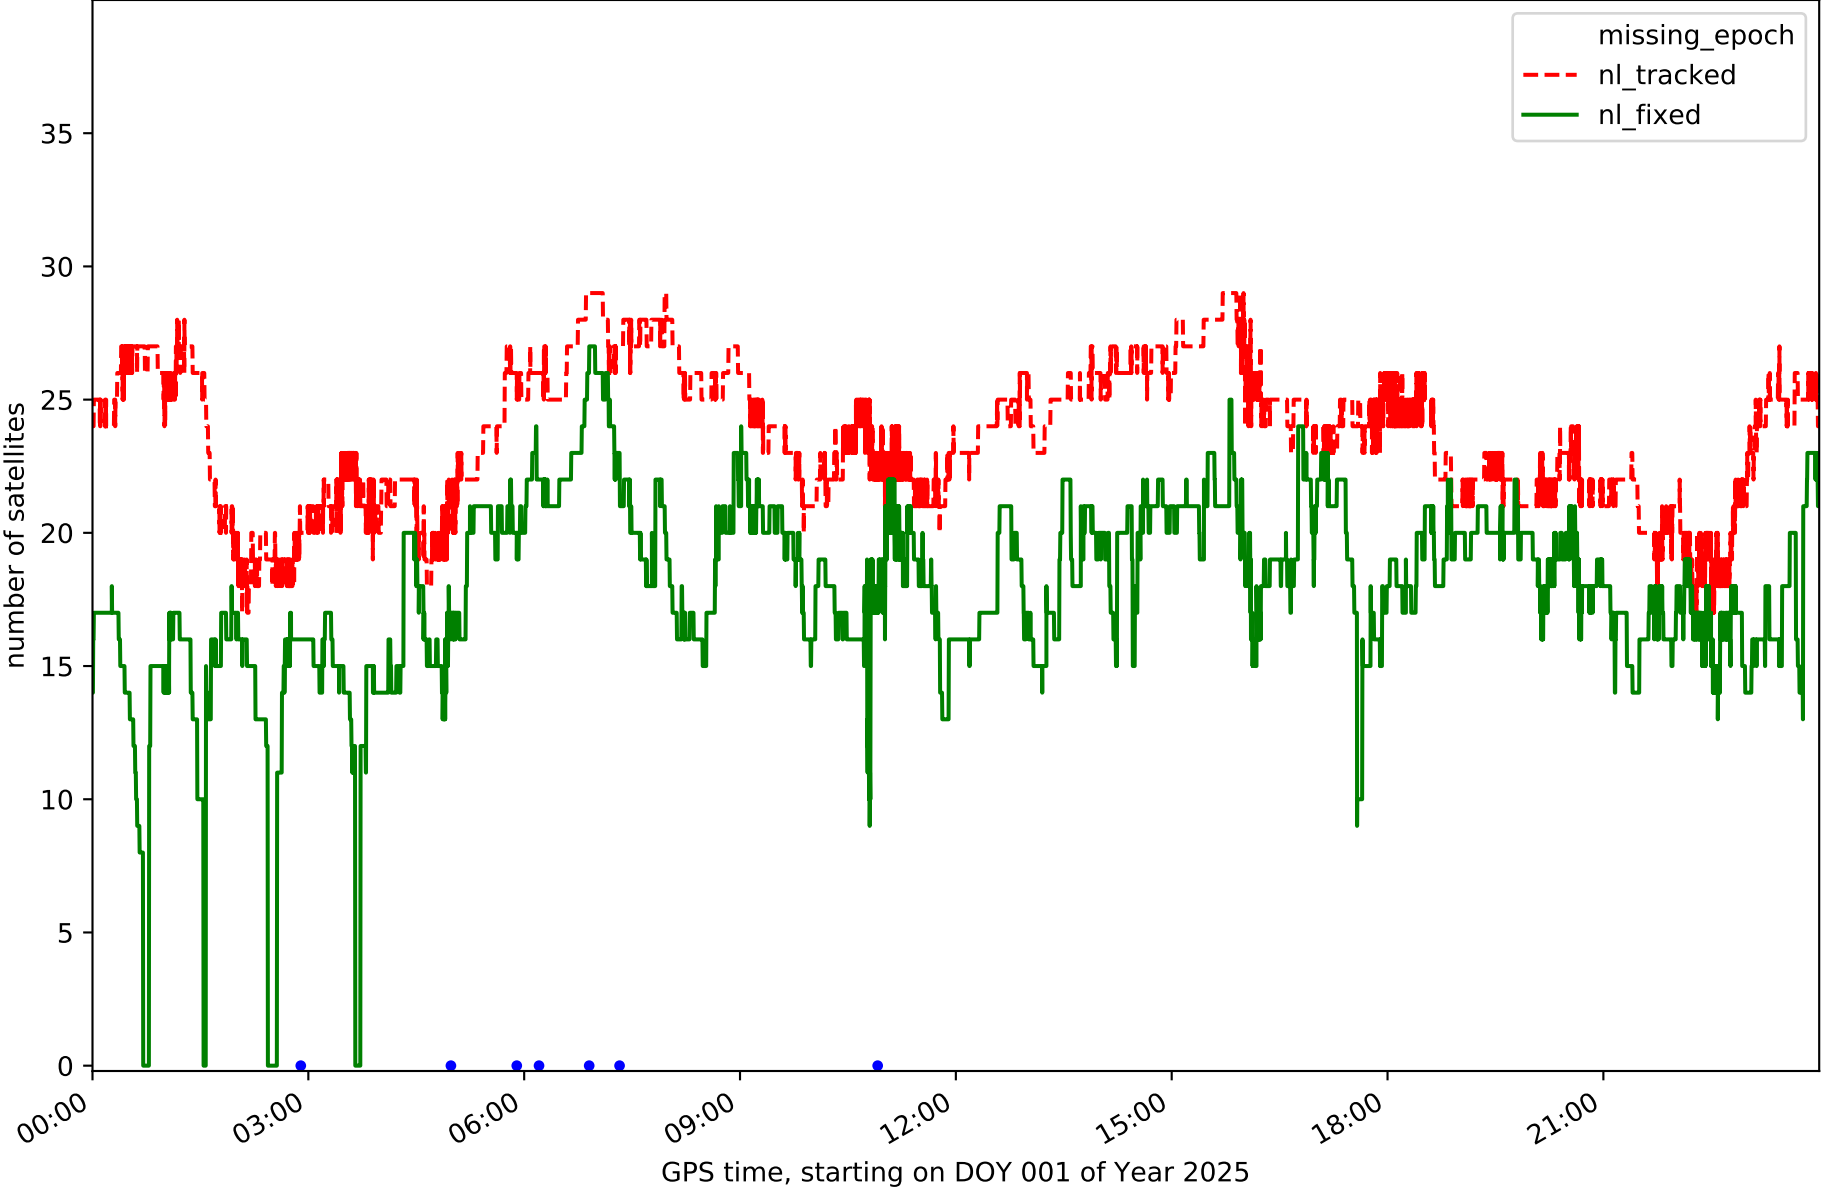

Station LALA in network N31T

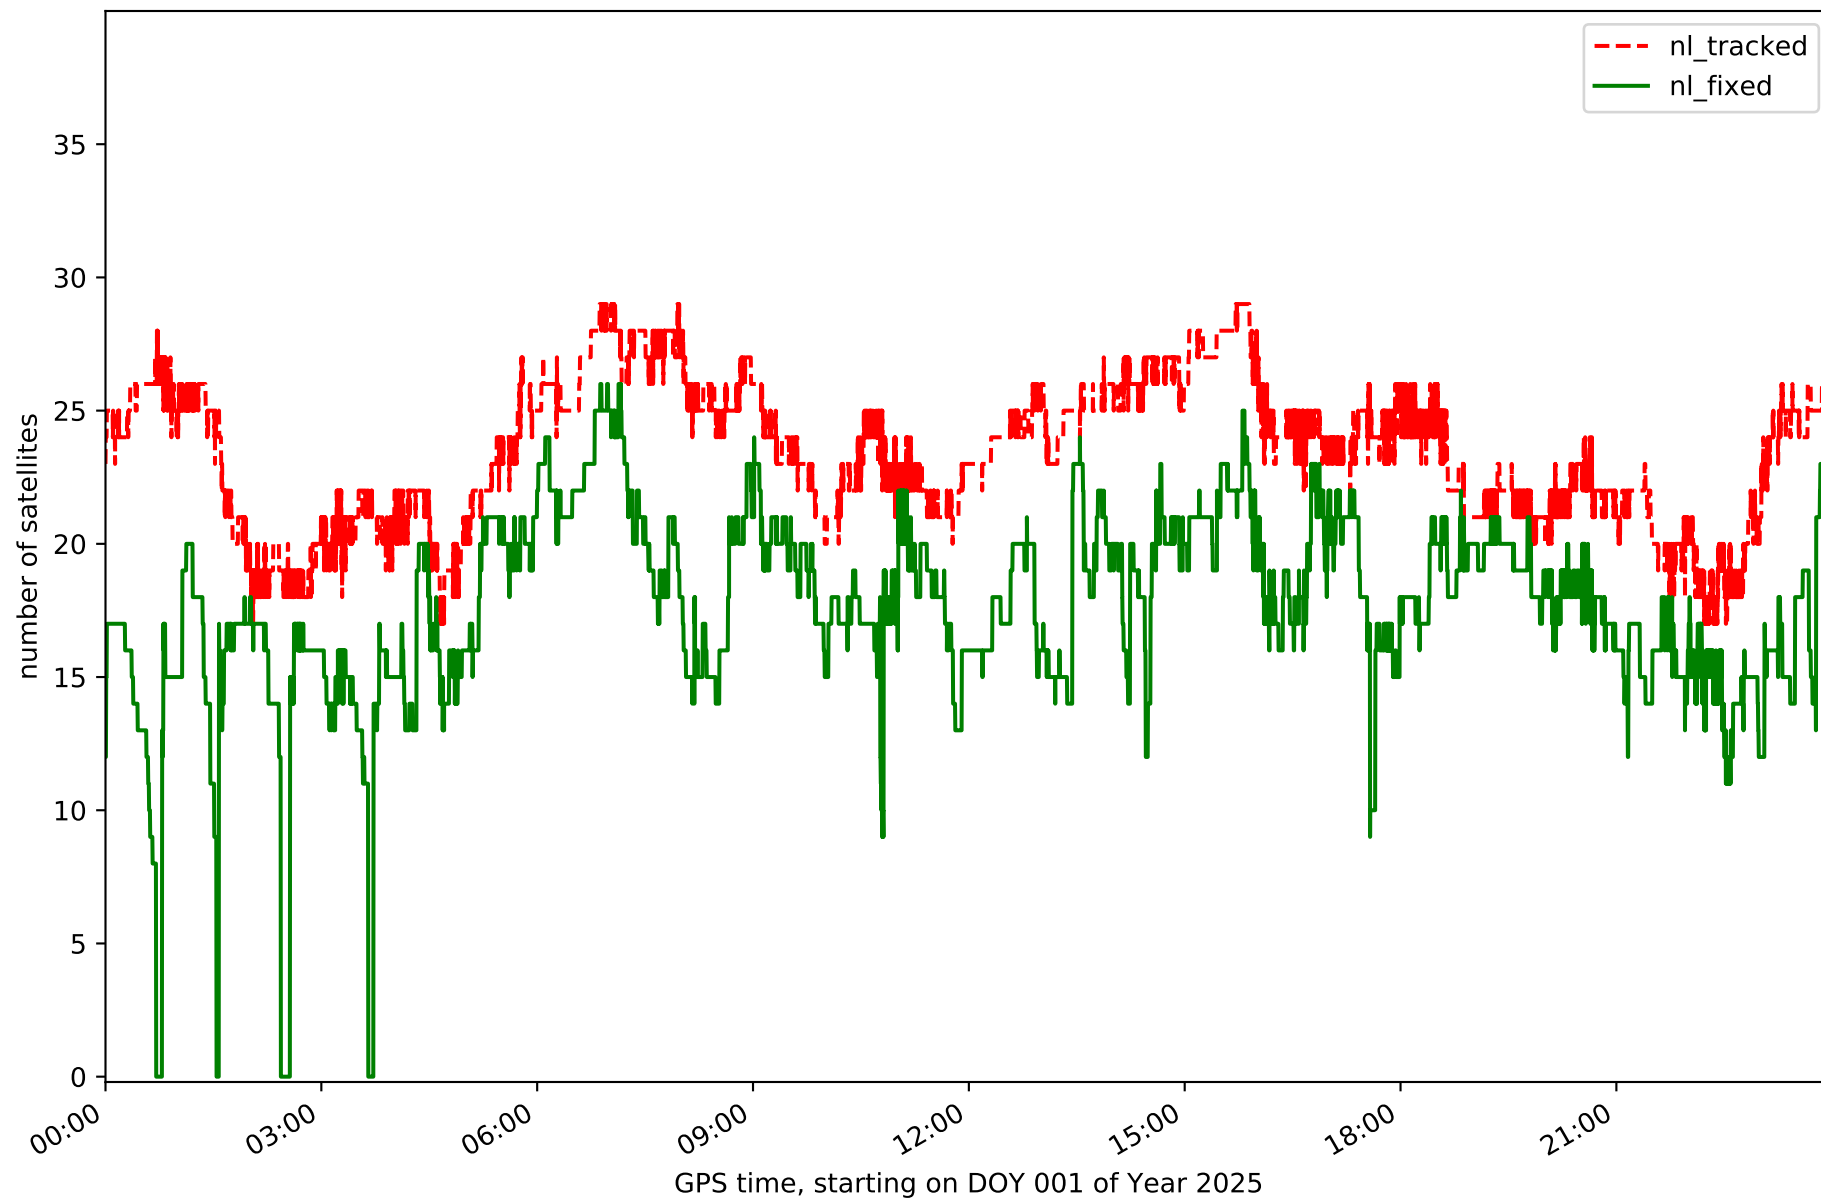


Station LZ01 in network N31T

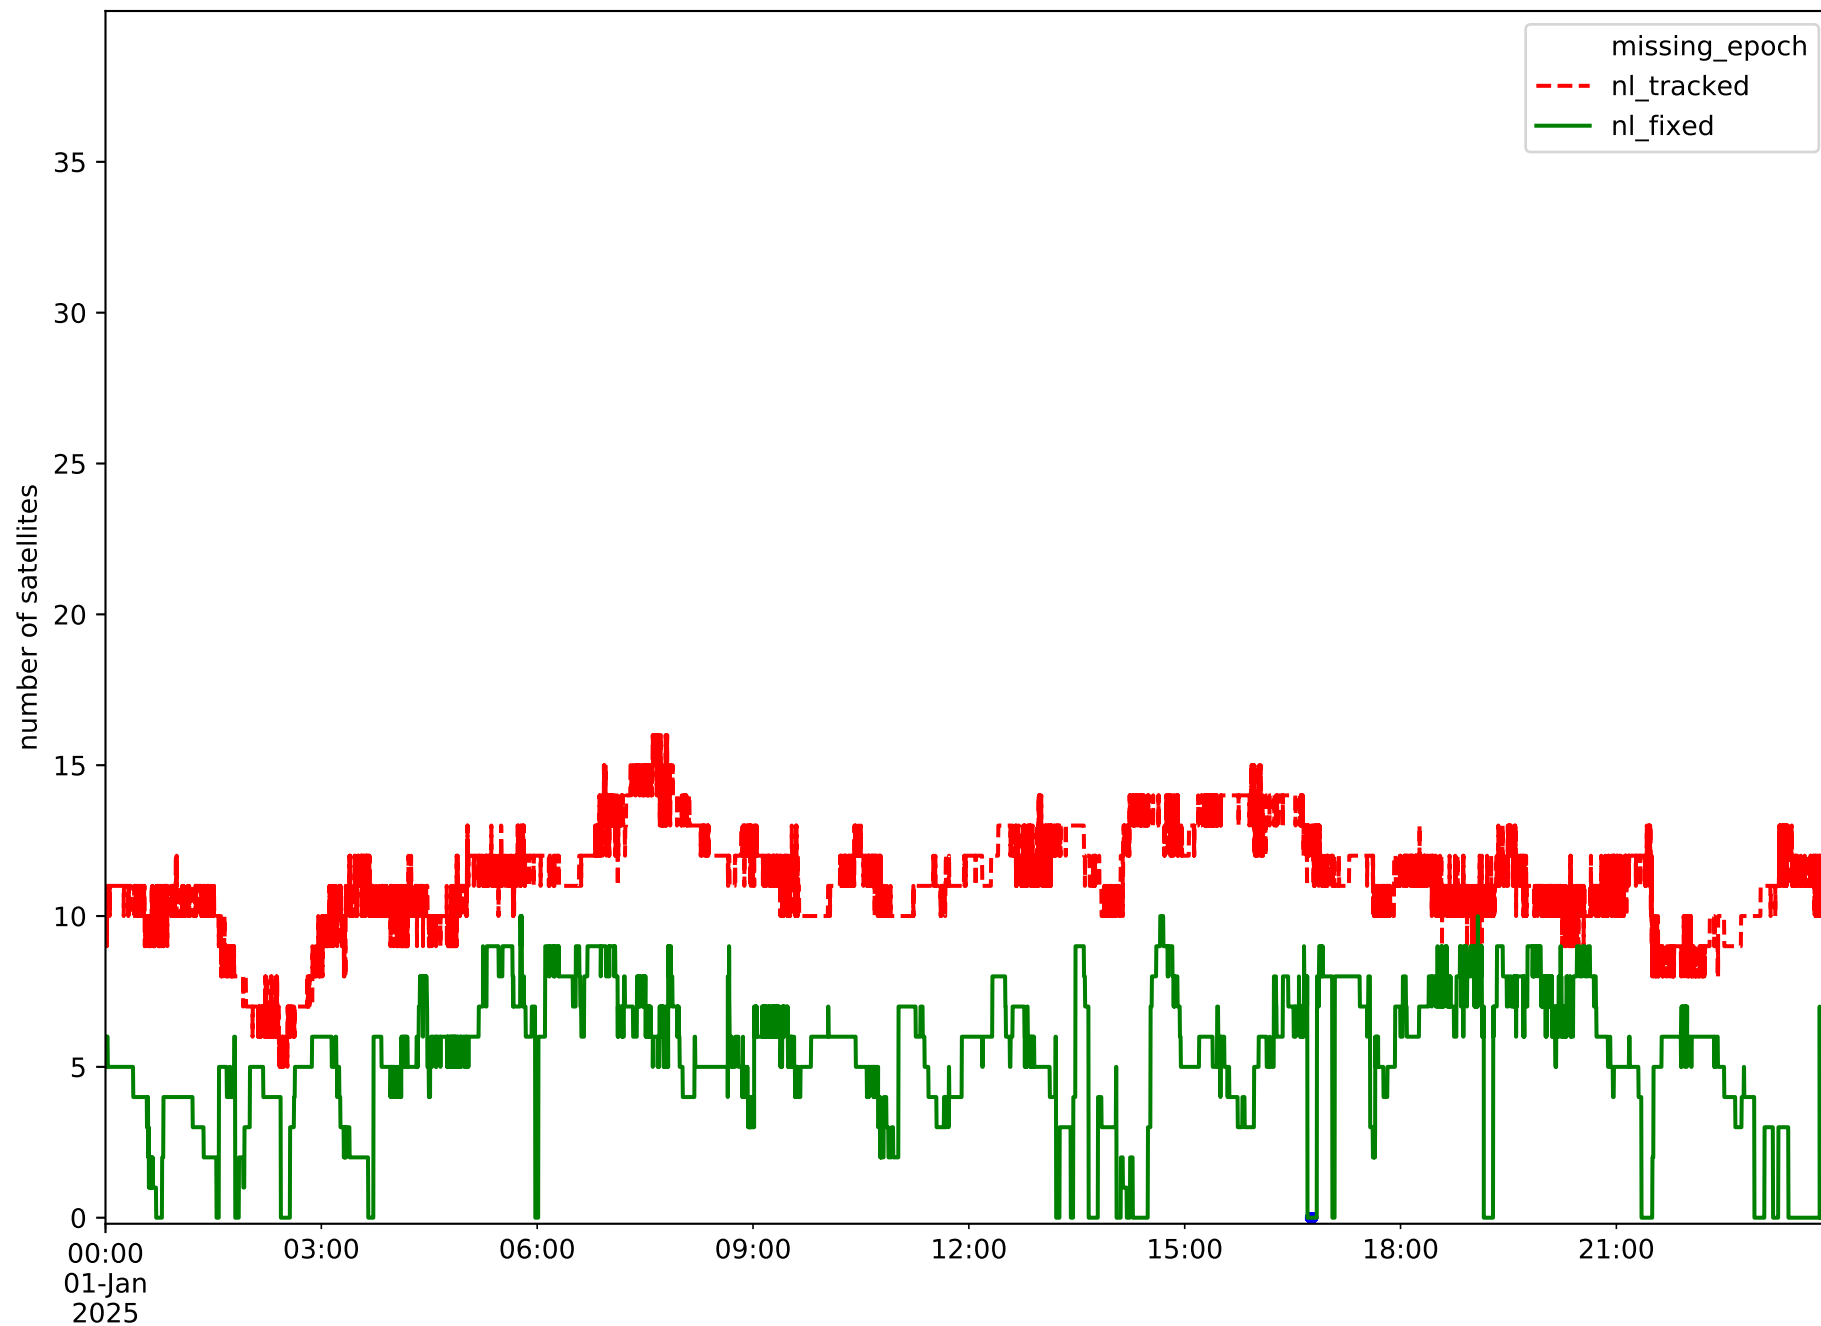


GPS time, starting on DOY 001 of Year 2025

Station LZ02 in network N31T

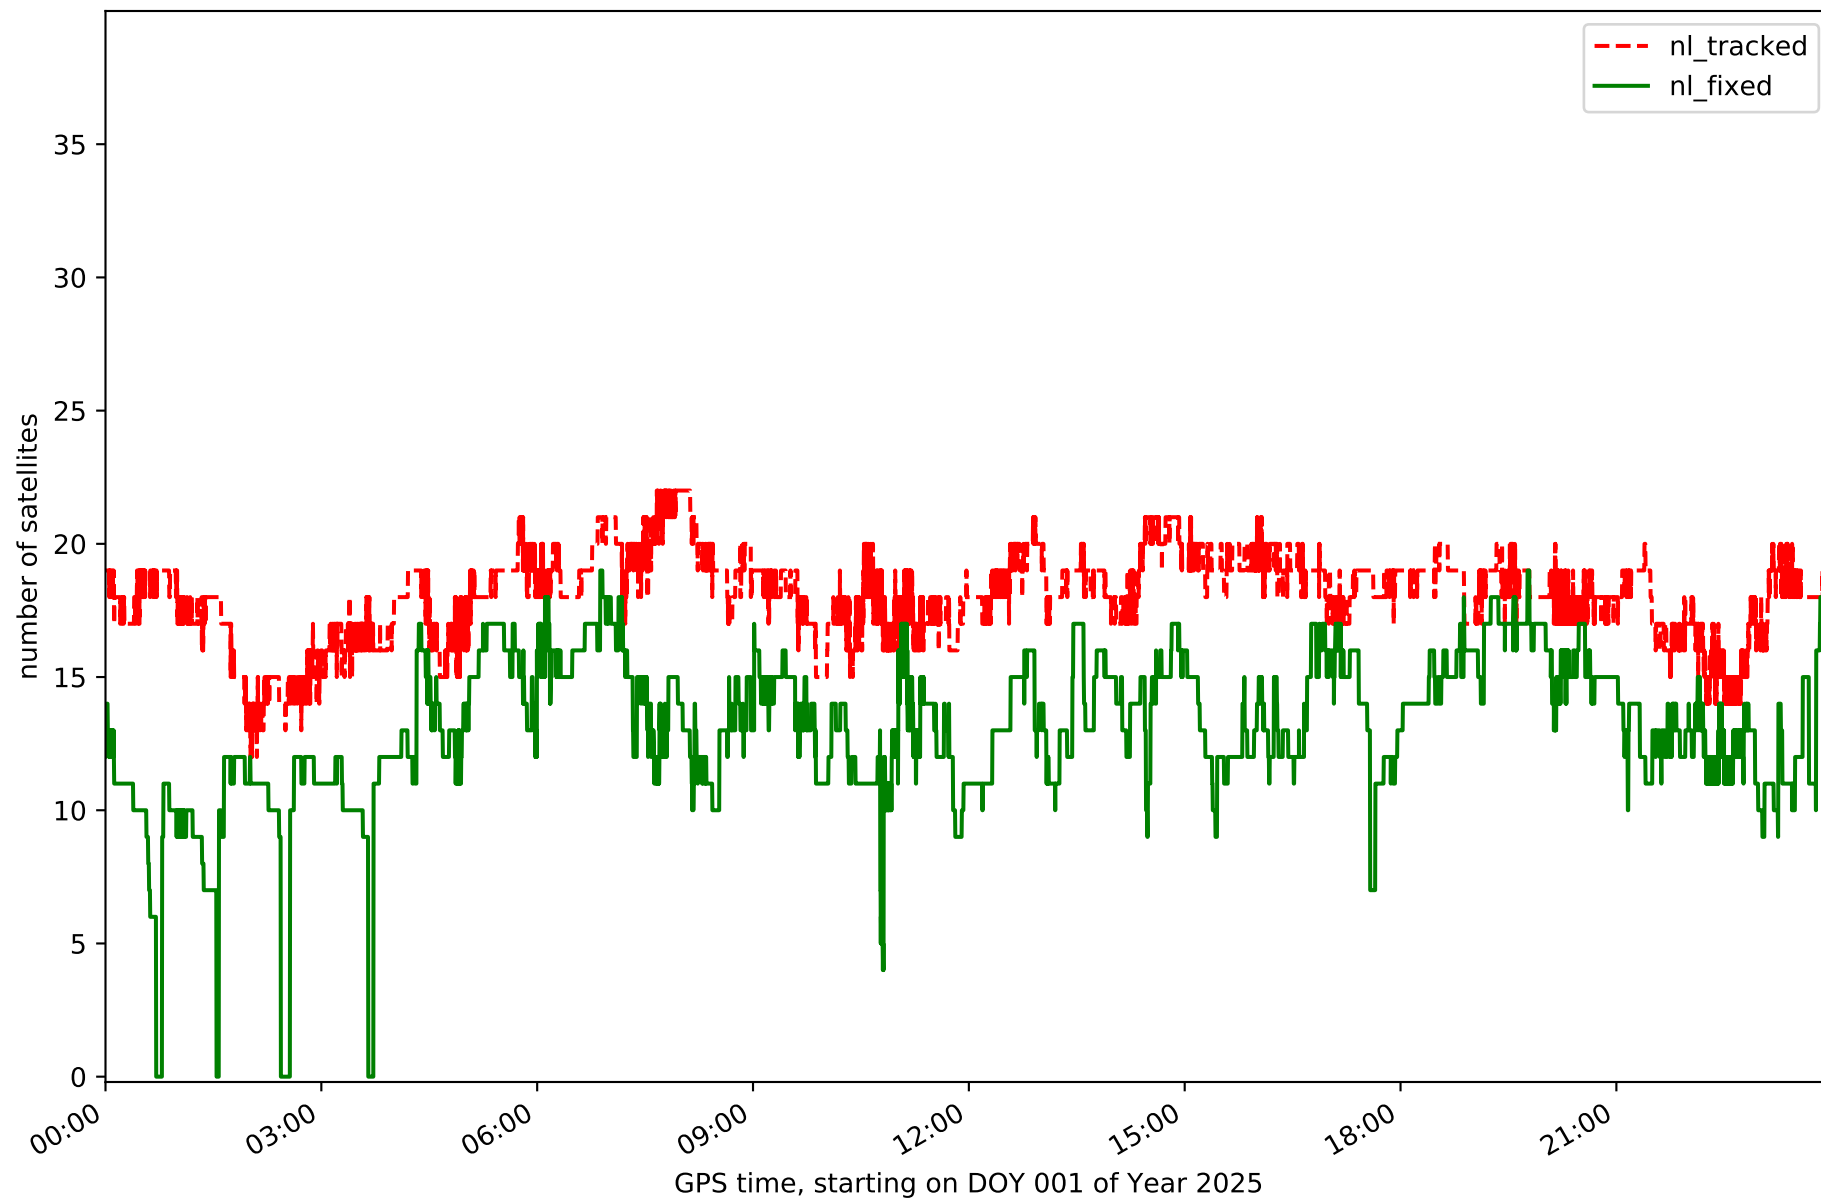


Station LZ03 in network N31T

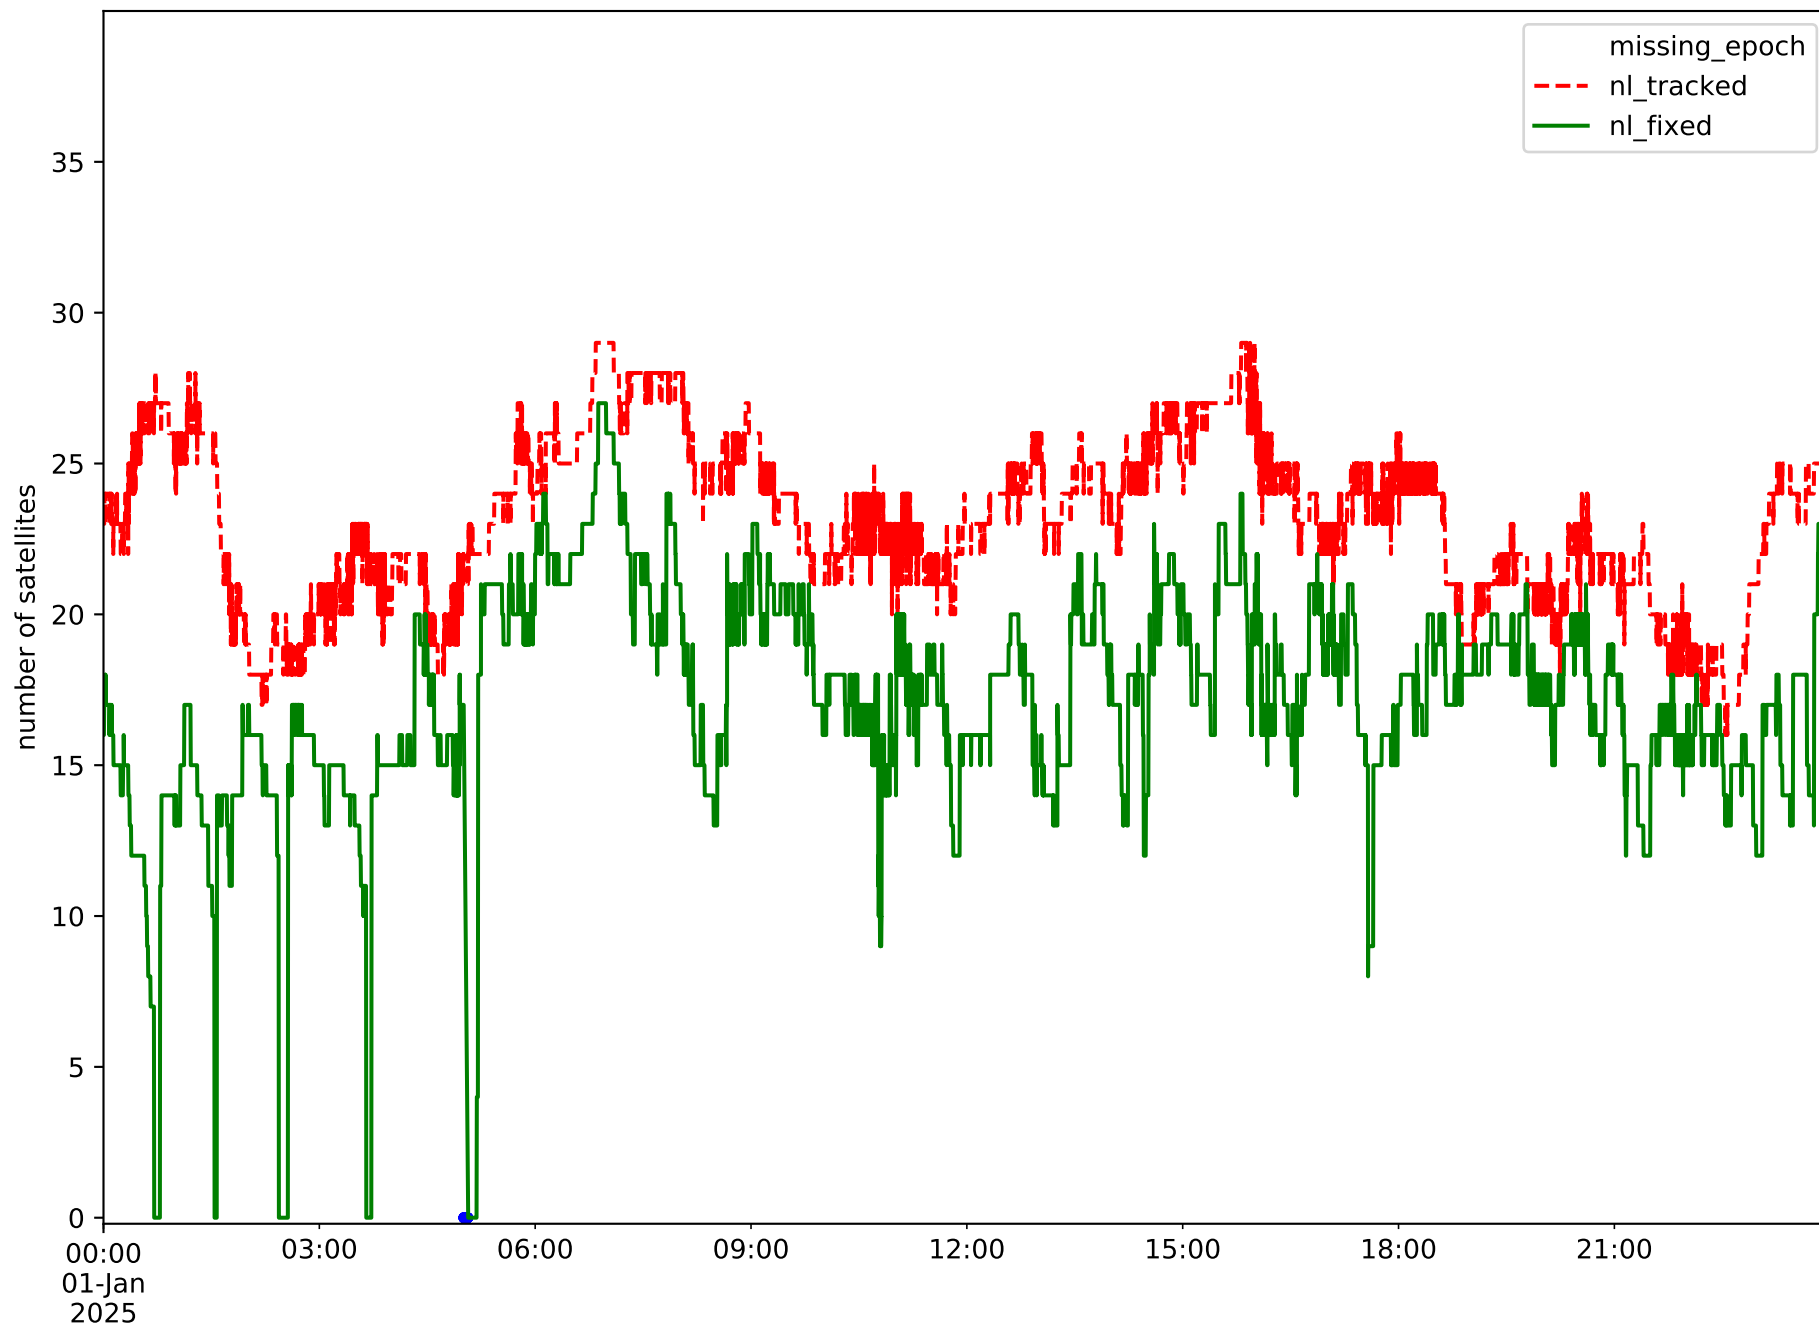


GPS time, starting on DOY 001 of Year 2025


Station MASP in network N31T

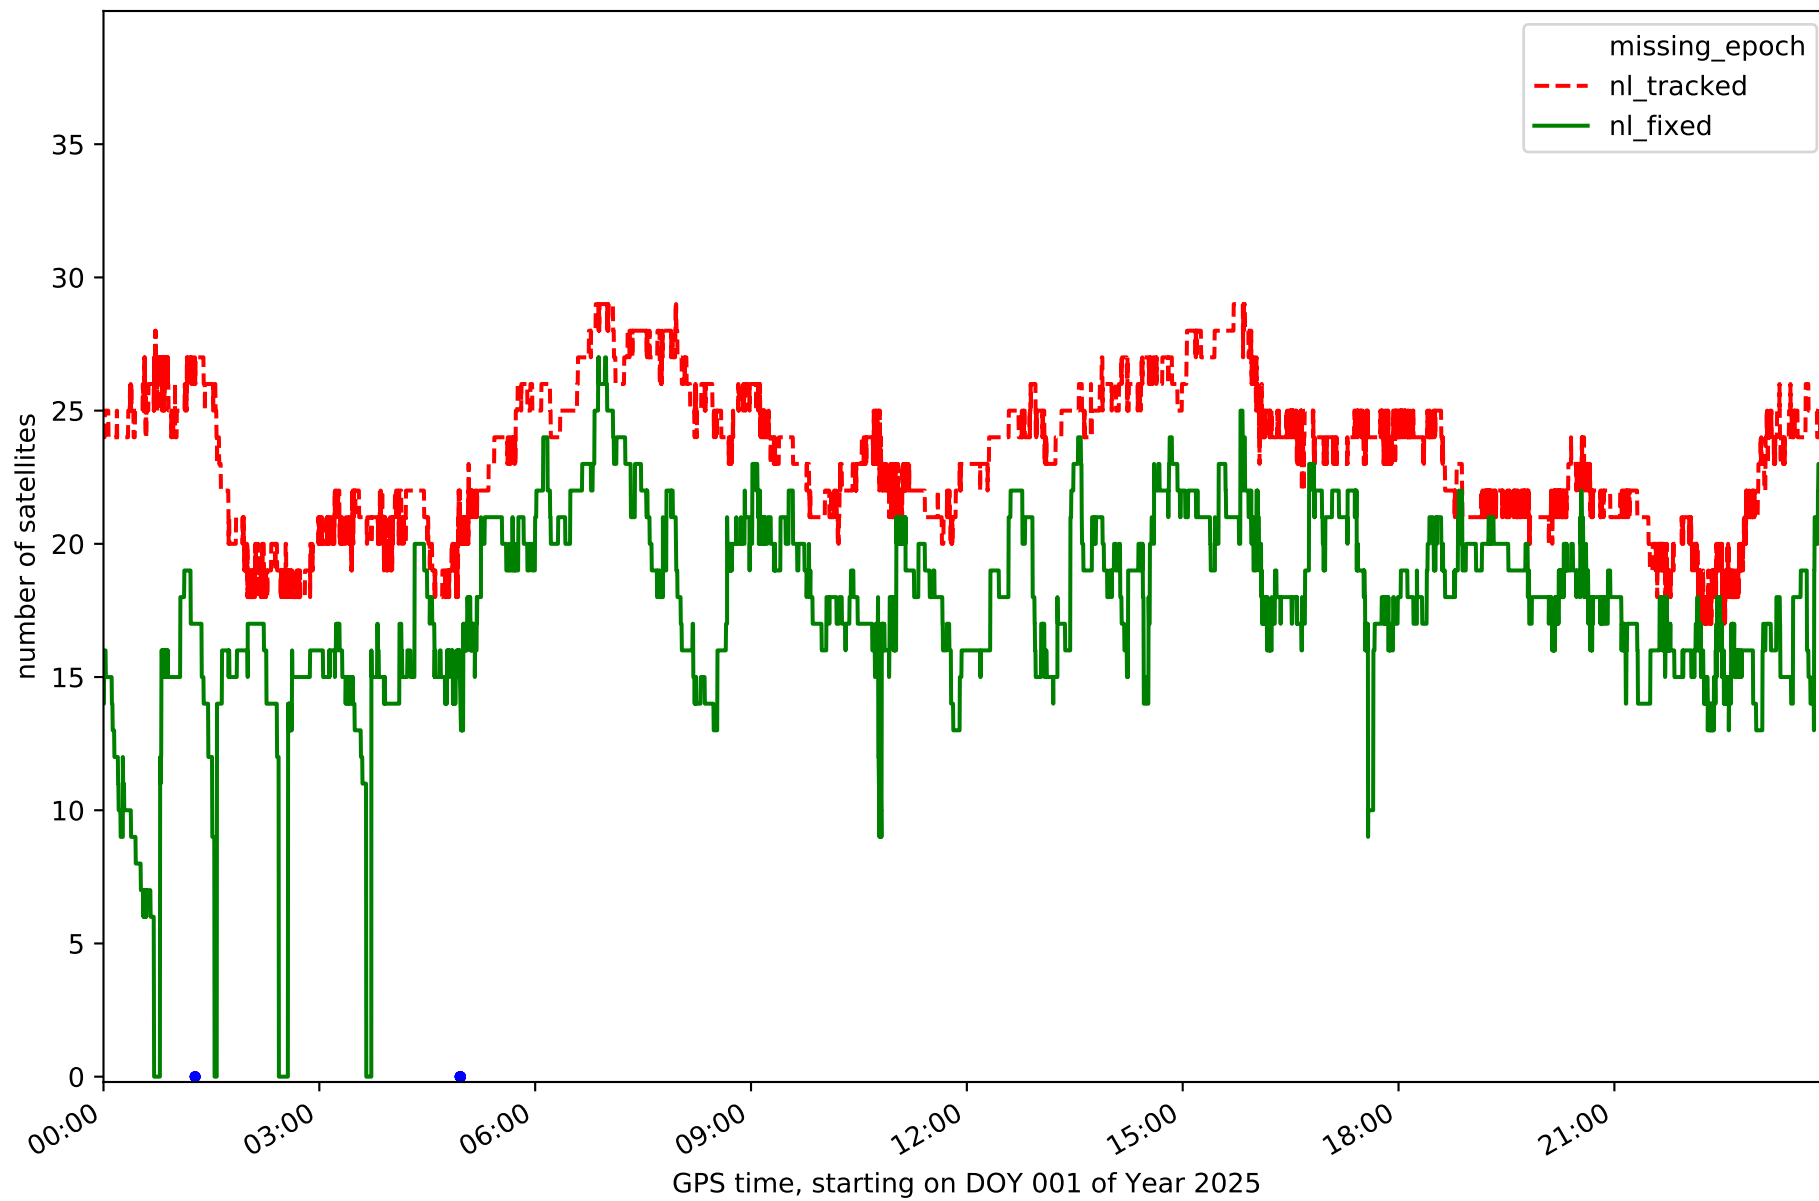


Station ULP2 in network N31T

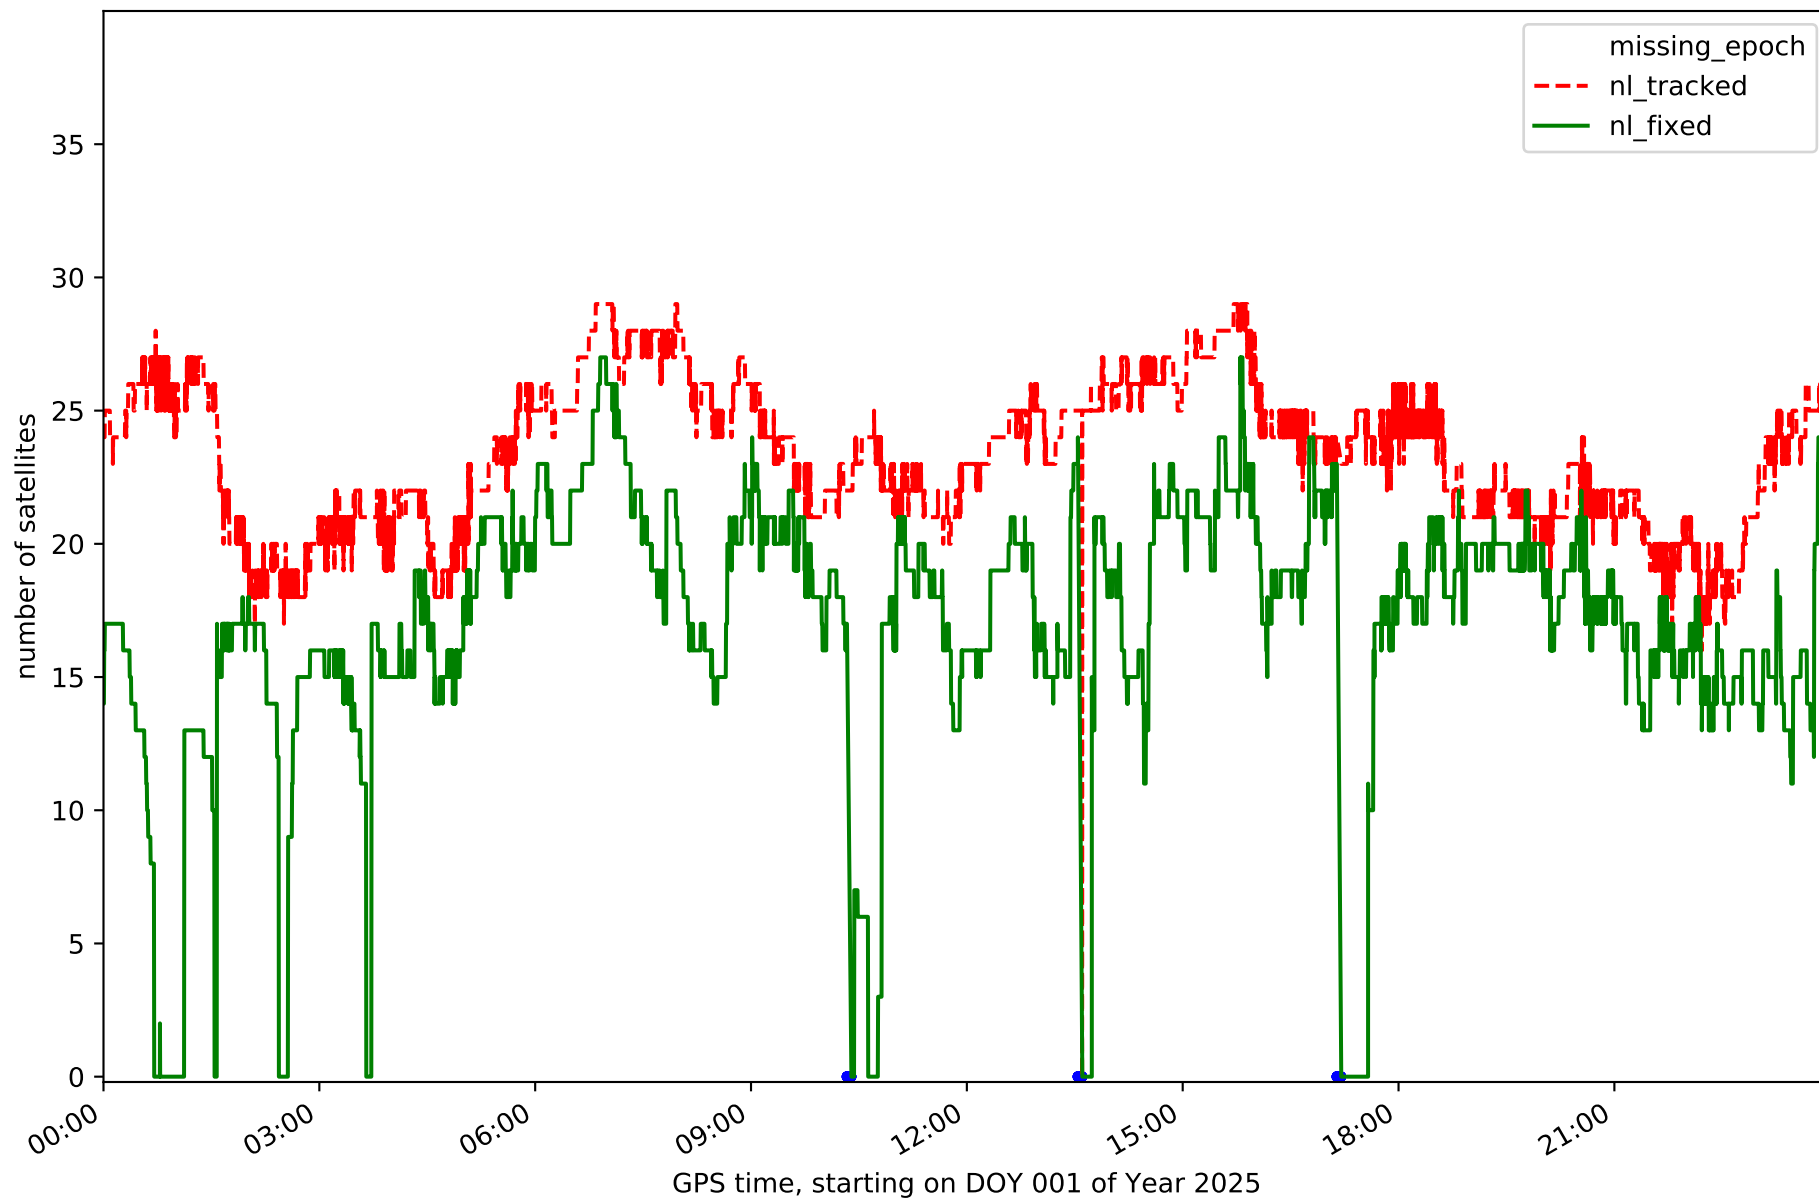


RefCheck for station FUER in network N31T

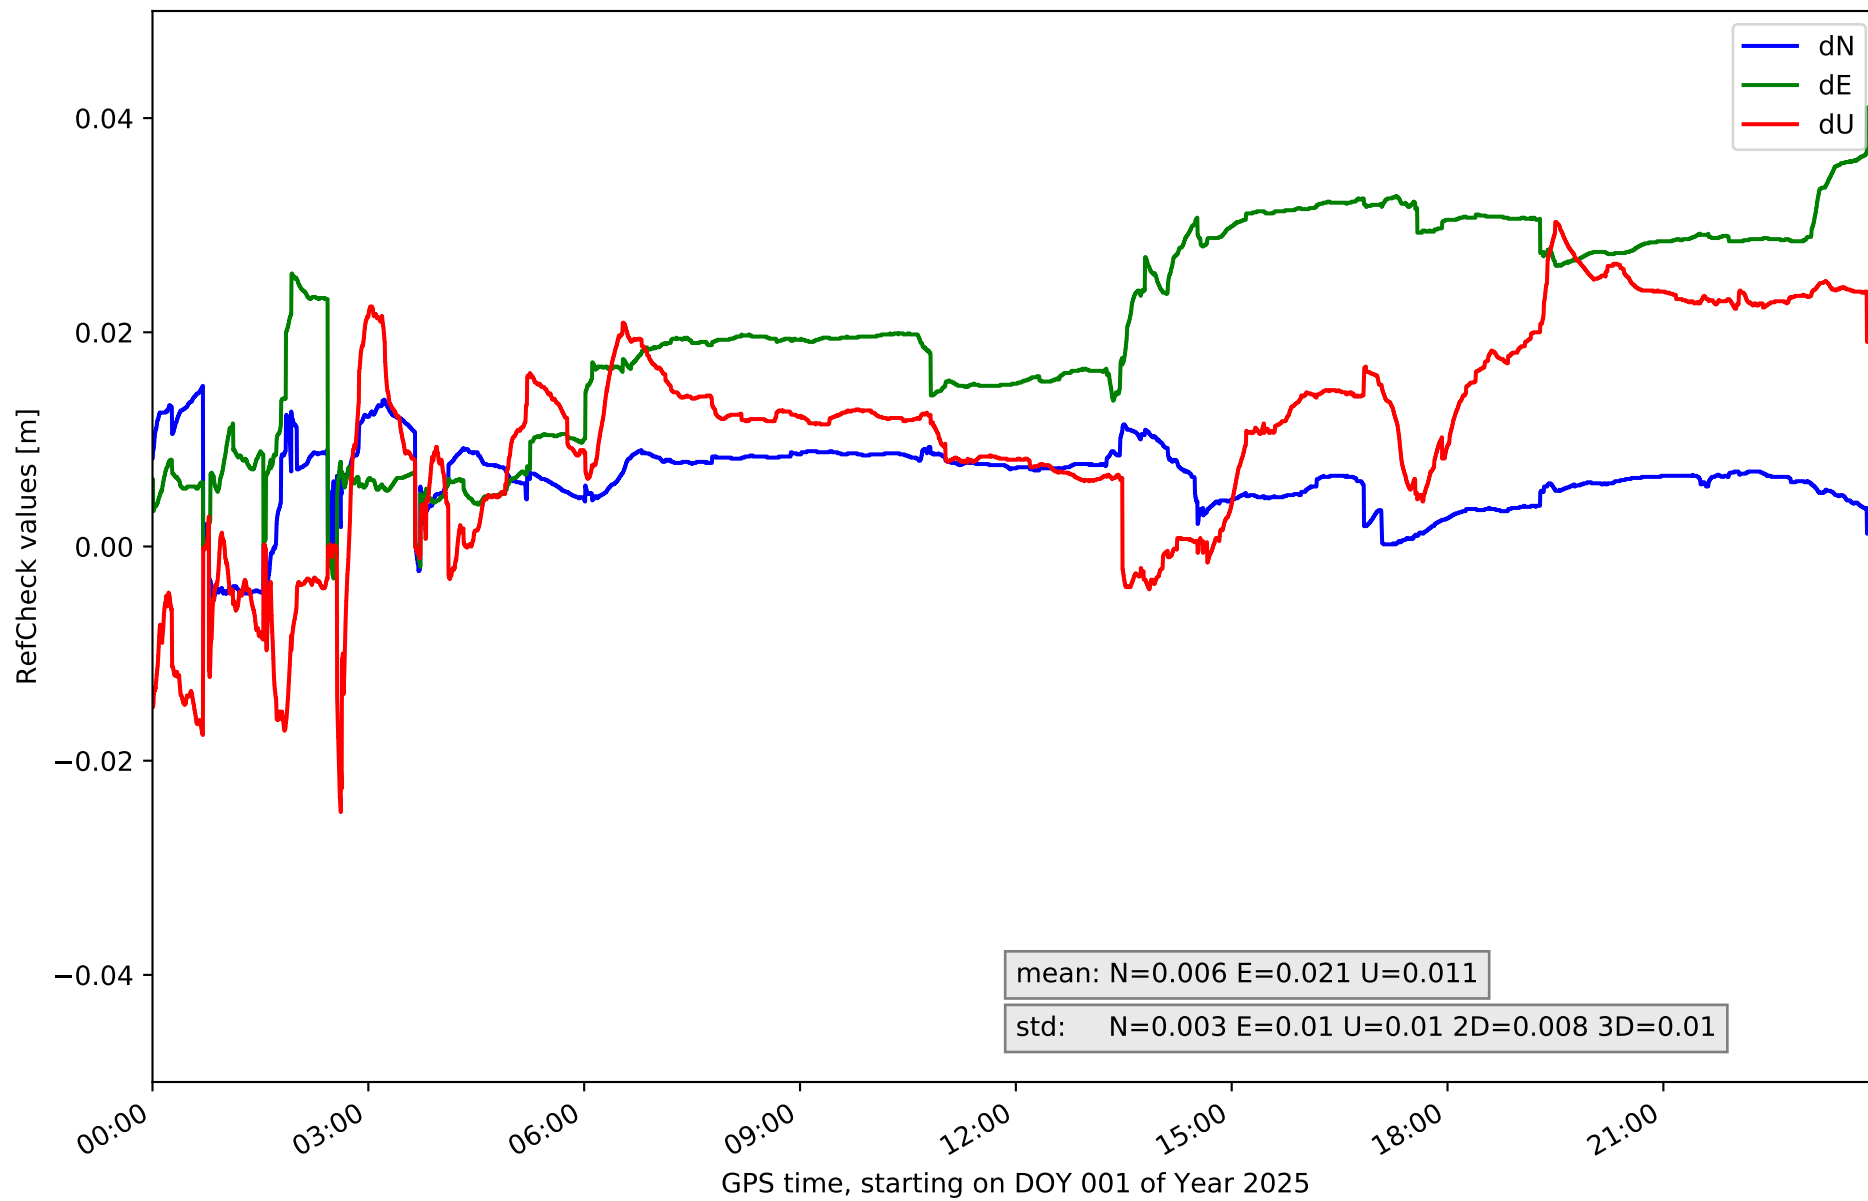


RefCheck for station LALA in network N31T

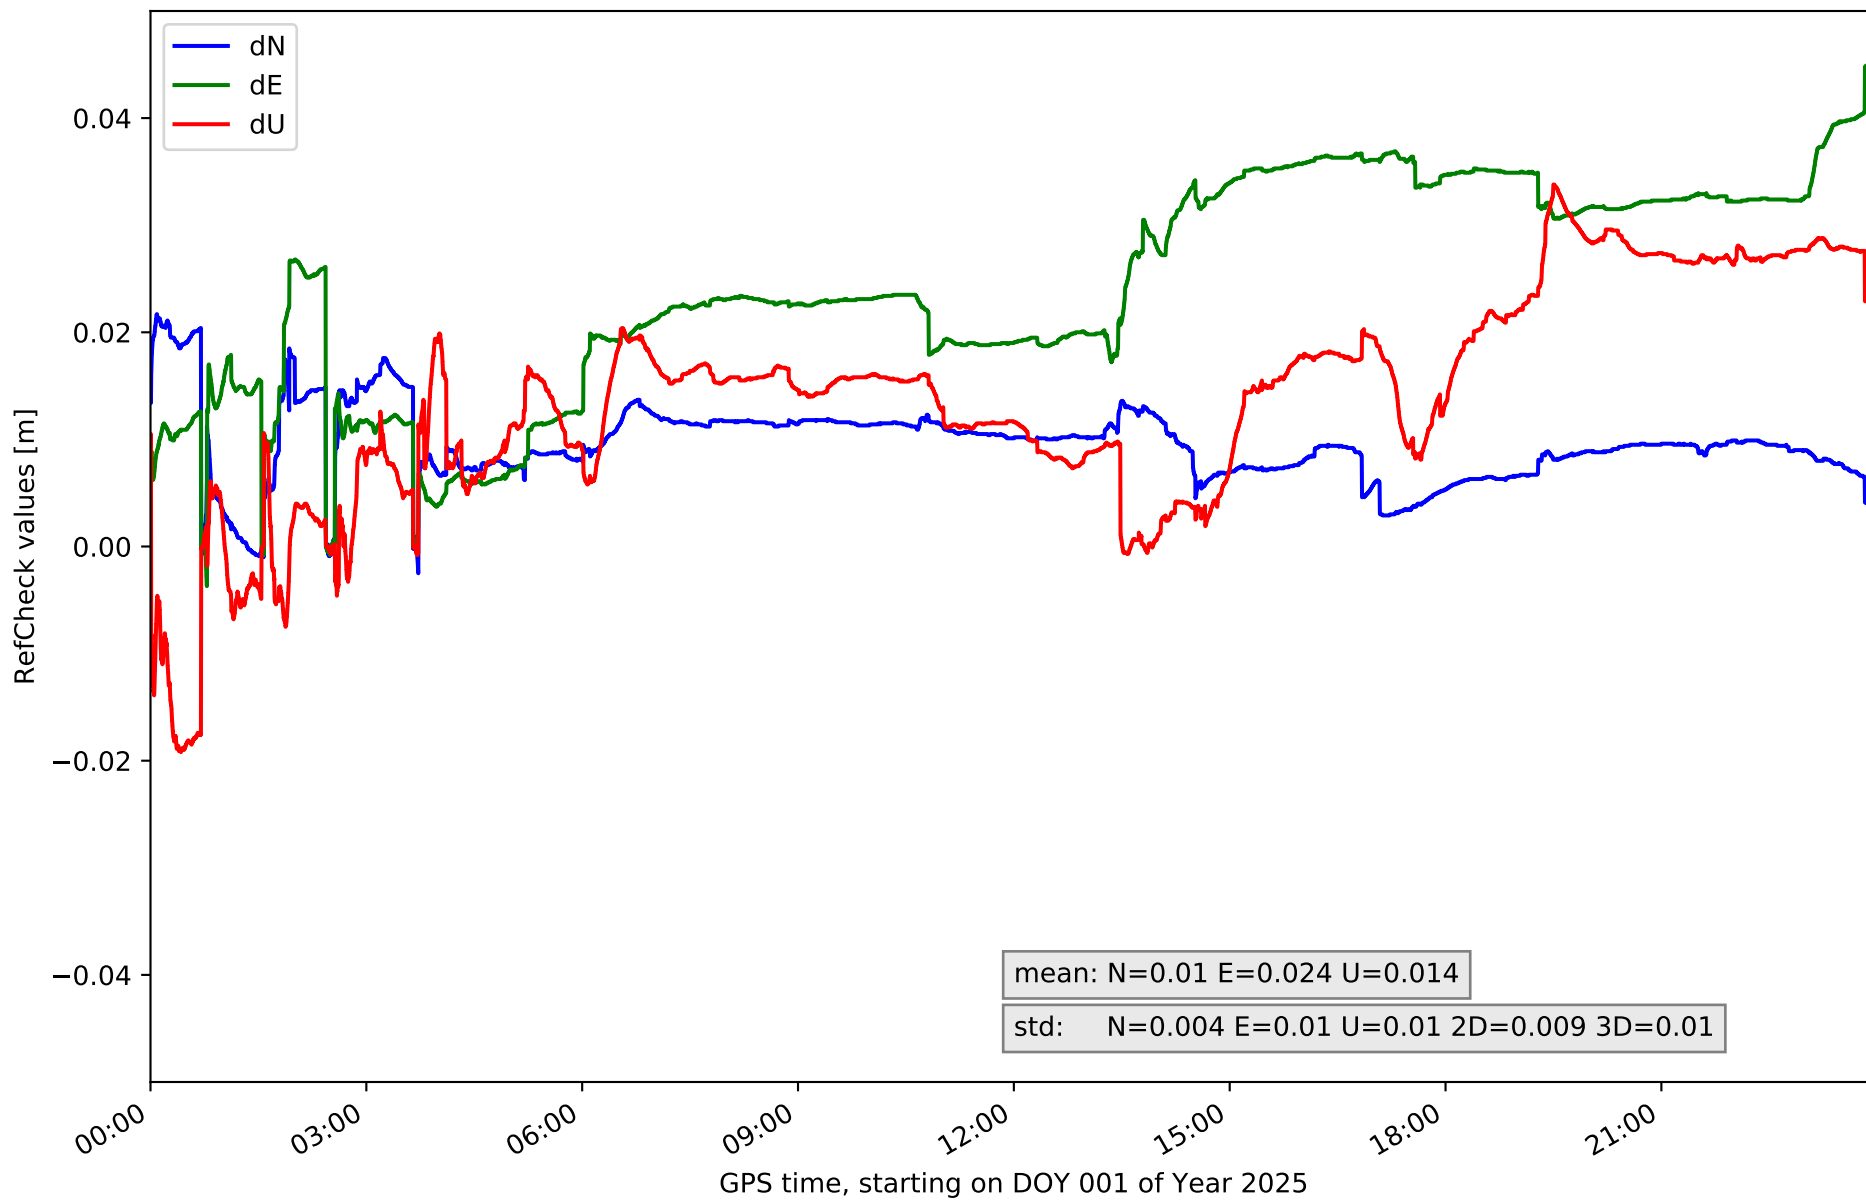


RefCheck for station LZ01 in network N31T

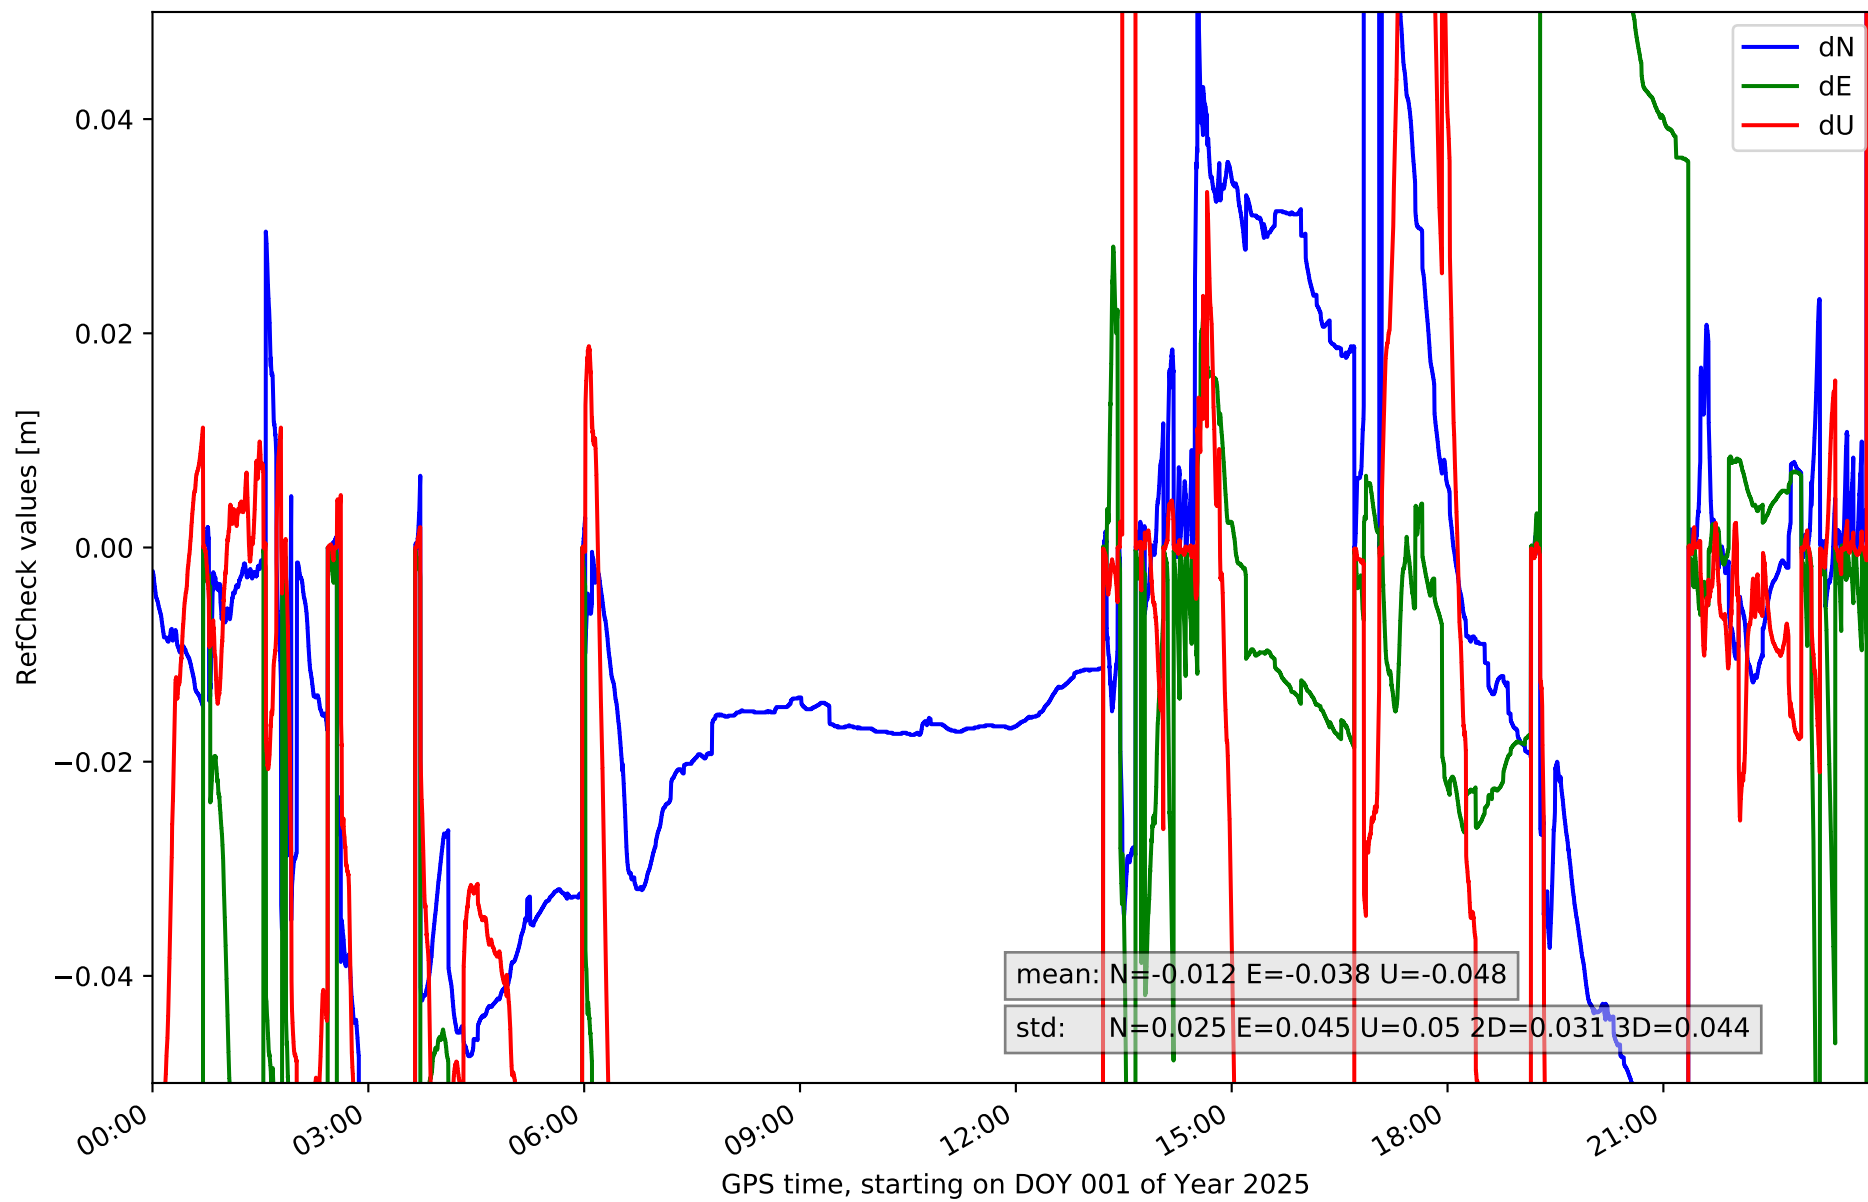


RefCheck for station LZ02 in network N31T

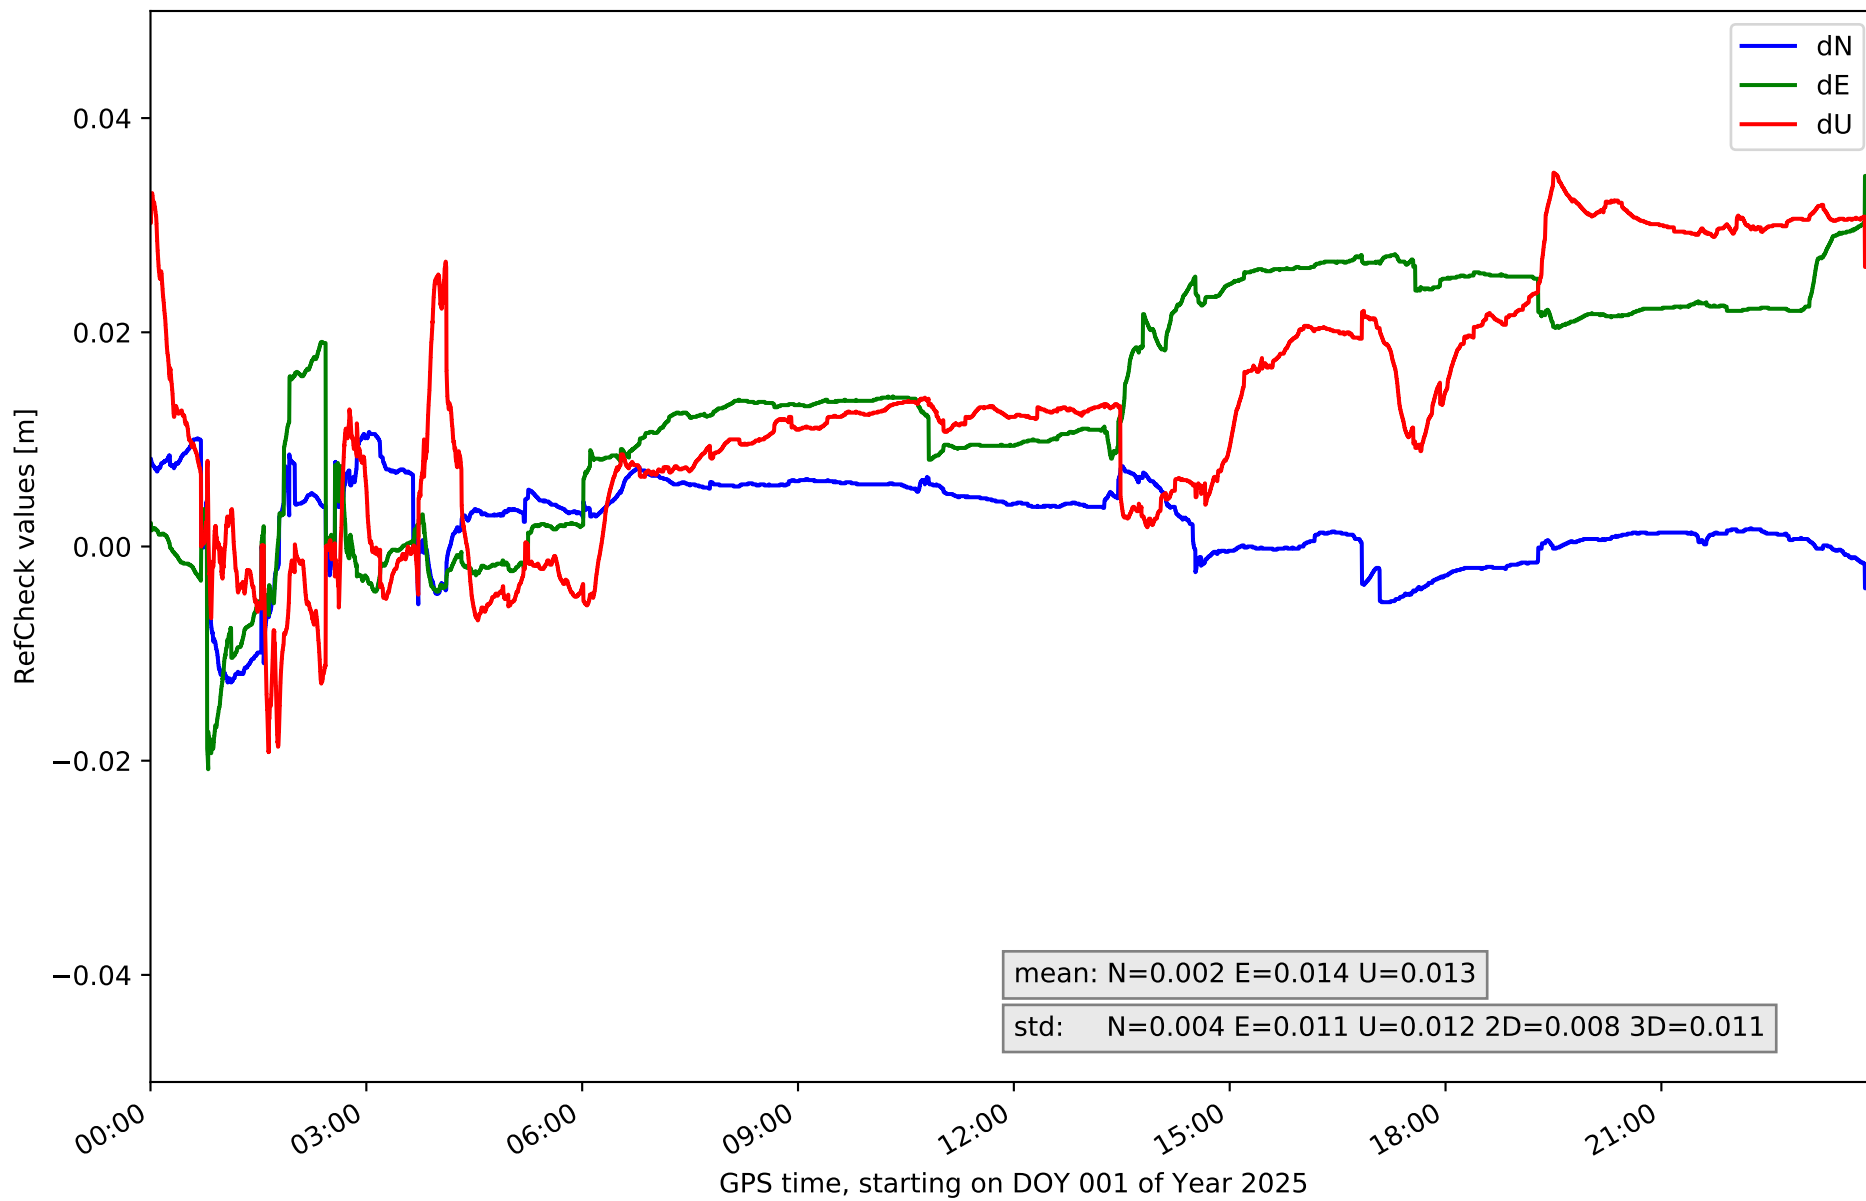


RefCheck for station LZ03 in network N31T

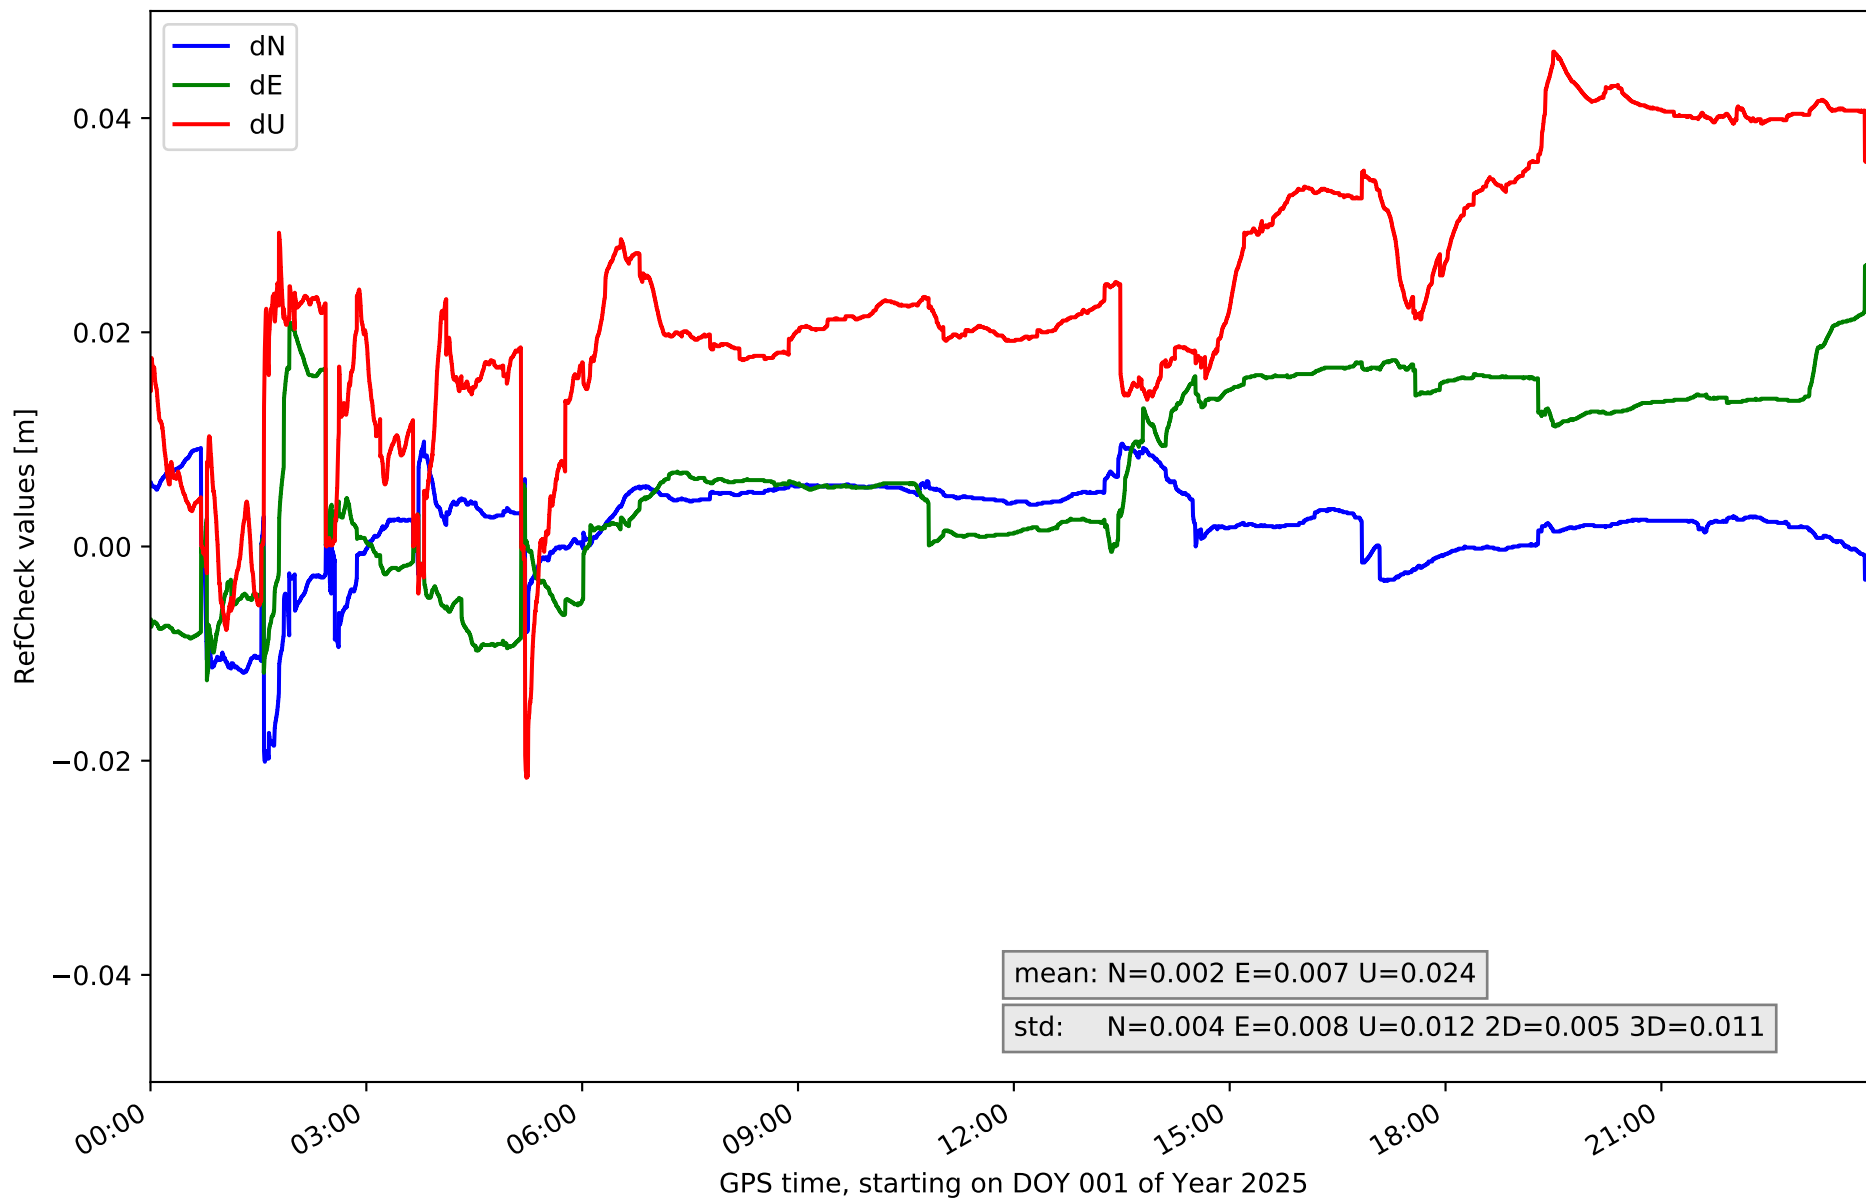

RefCheck for station MASP in network N31T

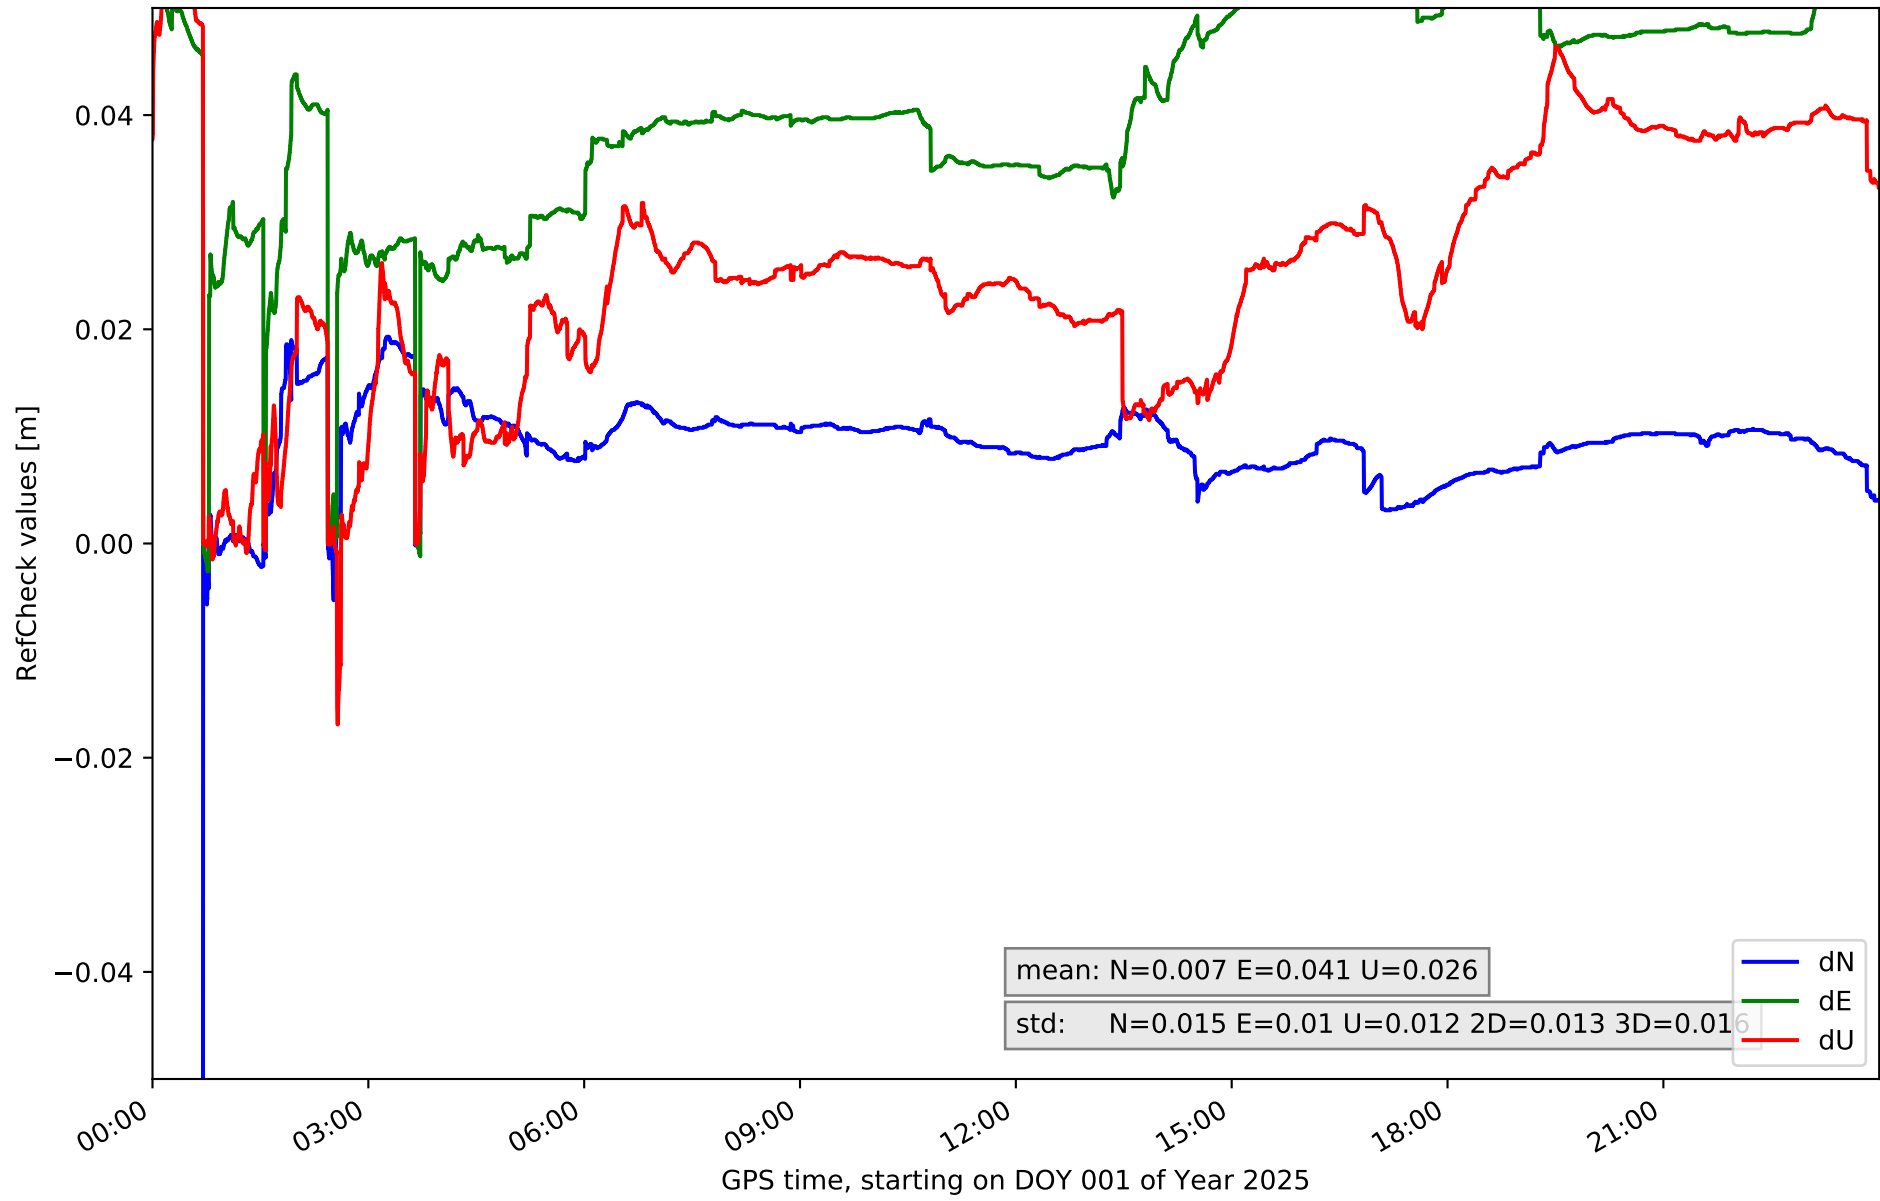

RefCheck for station ULP2 in network N31T

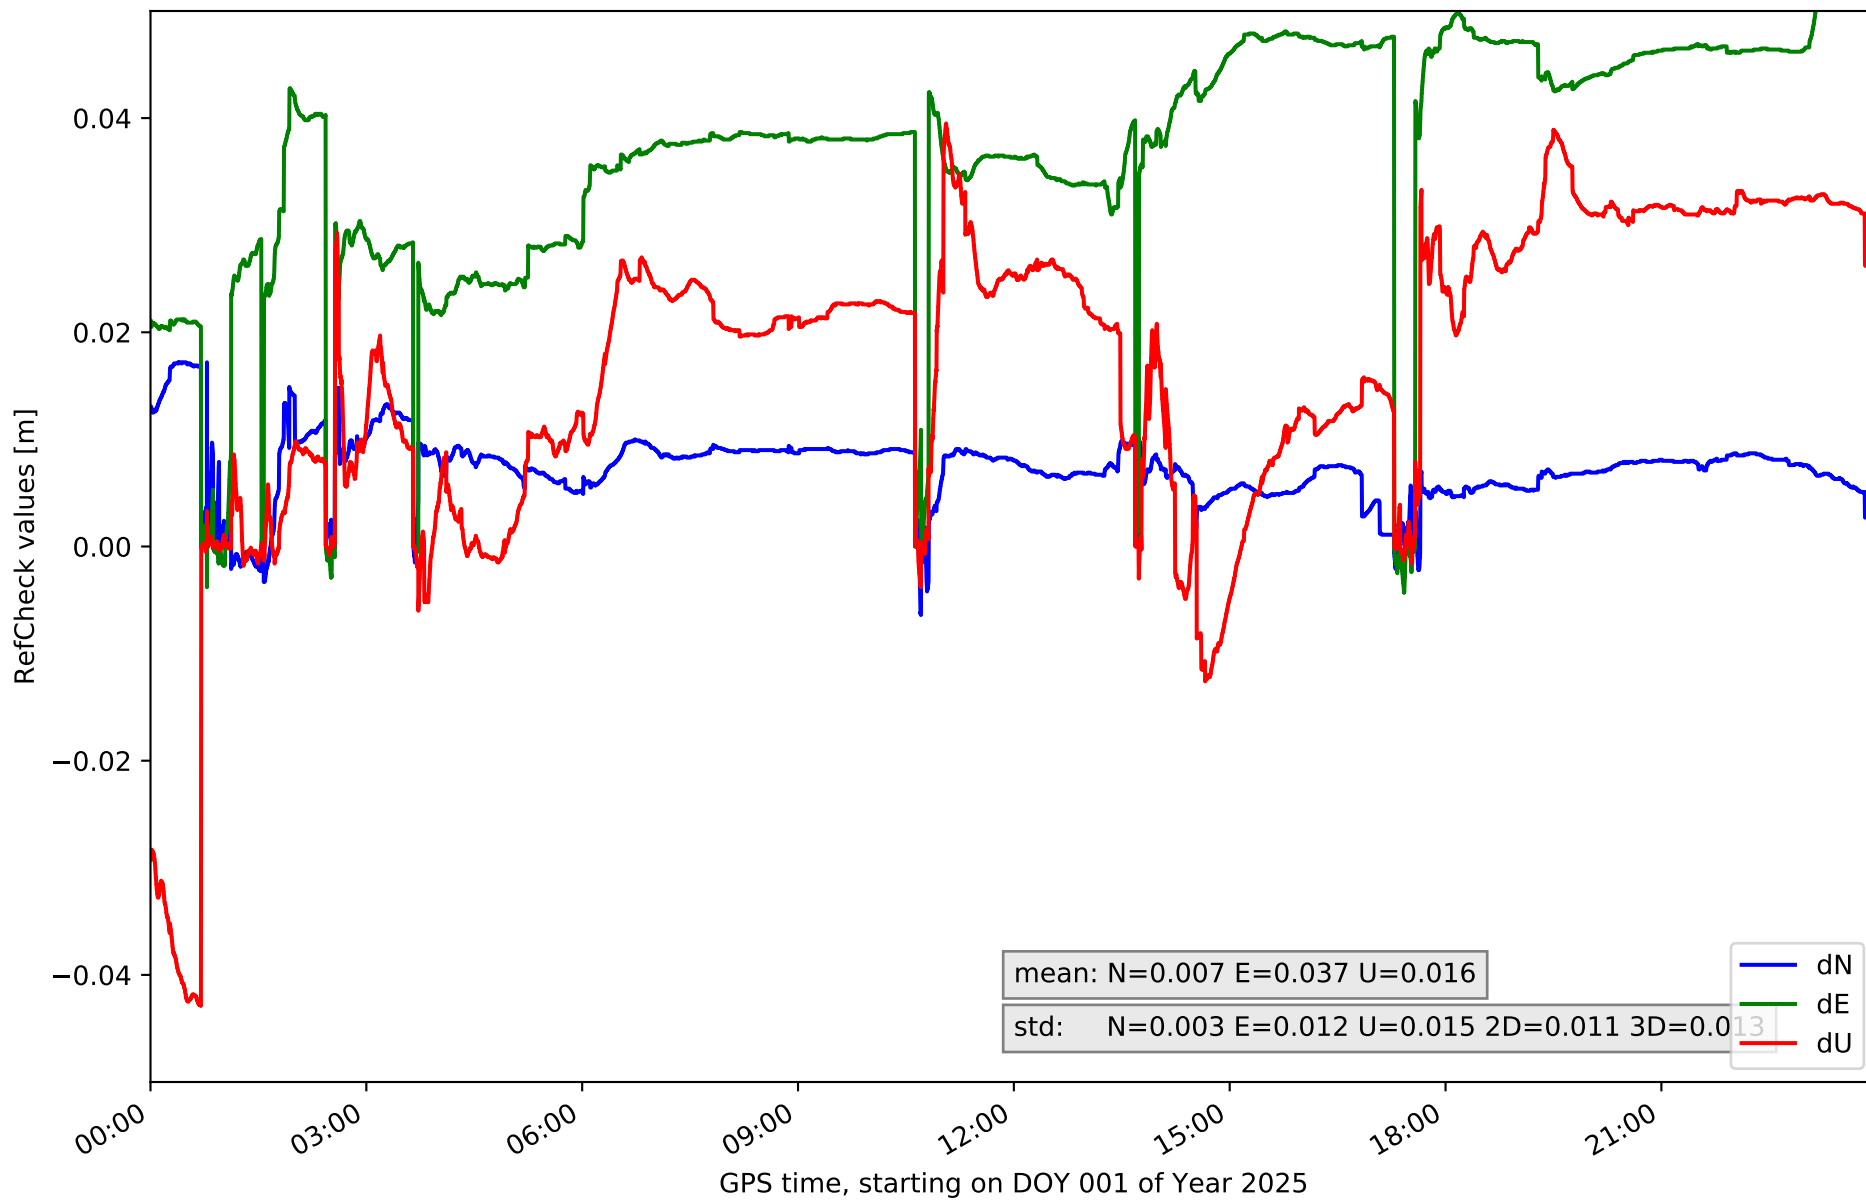

RefCheck values for network N31T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
FUER	-0.005	0.015	0.003	-0.003	0.045	0.01	-0.025	0.03	0.01	0.008	0.01	76555	89.2	59315	69.1
LALA	-0.003	0.022	0.004	-0.004	0.049	0.01	-0.019	0.034	0.01	0.009	0.01	81608	95.1	73035	85.1
LZ01	-0.071	0.077	0.025	-0.104	0.088	0.045	-0.165	0.128	0.05	0.031	0.044	75557	88.0	73186	85.3
LZ02	-0.013	0.011	0.004	-0.021	0.038	0.011	-0.019	0.035	0.012	0.008	0.011	68441	79.8	39616	46.2
LZ03	-0.02	0.01	0.004	-0.013	0.03	0.008	-0.022	0.046	0.012	0.005	0.011	45581	53.1	63266	73.7
MASP	-0.083	0.019	0.015	-0.003	0.064	0.01	-0.017	0.056	0.012	0.013	0.016	84670	98.7	84620	98.6
ULP2	-0.006	0.017	0.003	-0.004	0.062	0.012	-0.043	0.04	0.015	0.011	0.013	81623	95.1	81540	95.0
Mean	-0.029	0.024	0.008	-0.022	0.054	0.015	-0.044	0.053	0.017	0.012	0.016	73433.6	85.6	67796.9	79.0
Min/Max	-0.083	0.077	0.025	-0.104	0.088	0.045	-0.165	0.128	0.05	0.031	0.044	84670	98.7	84620	98.6

fixing statistic for network N31T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	77.3	69.0	62.8	91.2	85.8
considering satellites with dual-frequency fixed	72.1	64.5	57.8	88.9	82.2
considering all signals separately	73.3	65.2	57.8	89.2	79.0