

summary for network NT32

timeperiod chosen: from 2025-04-11-00:00:00 until 2025-04-11-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.3 seconds


average fixing percentage with threshold set to 0.3: 81.7 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

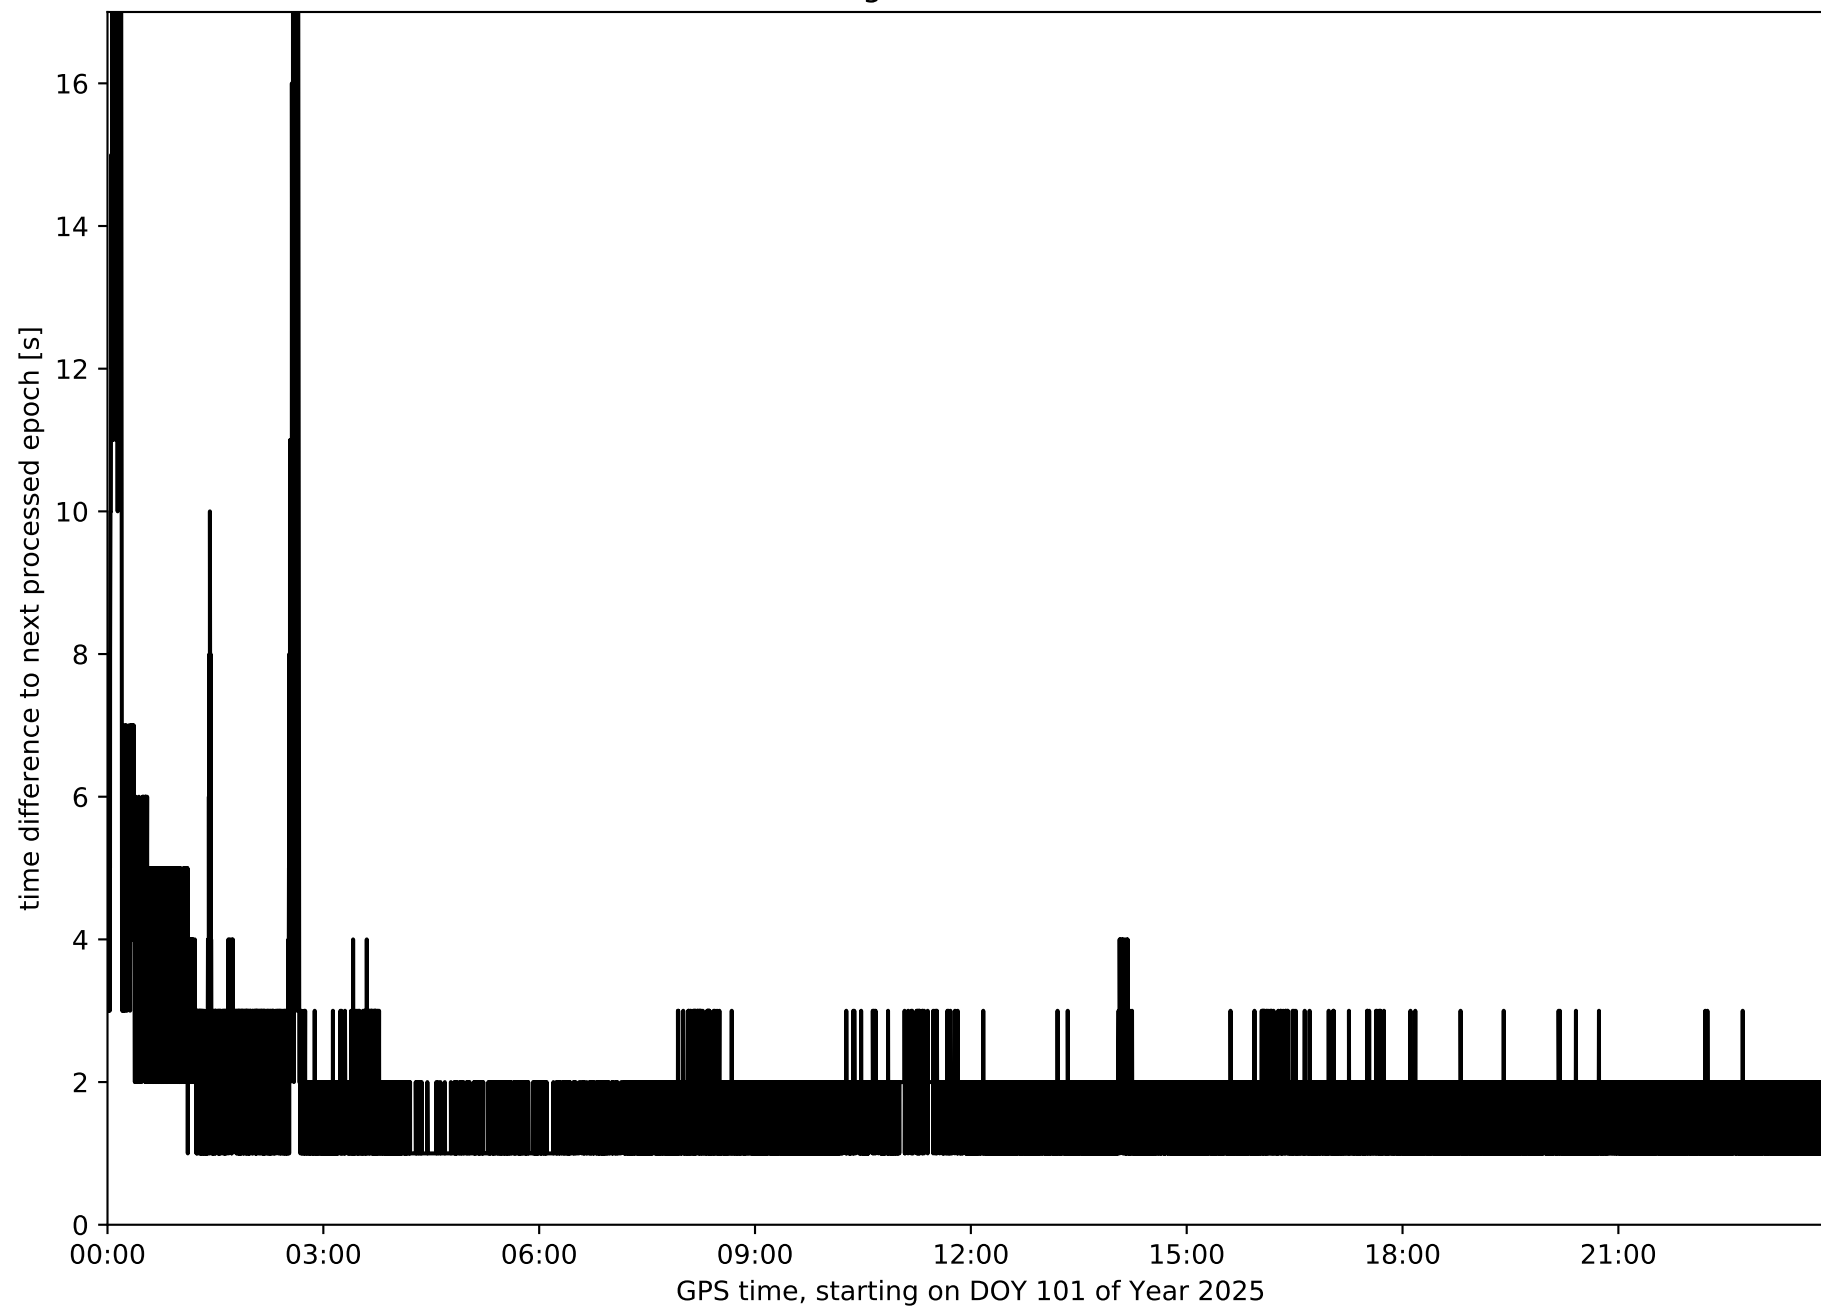


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

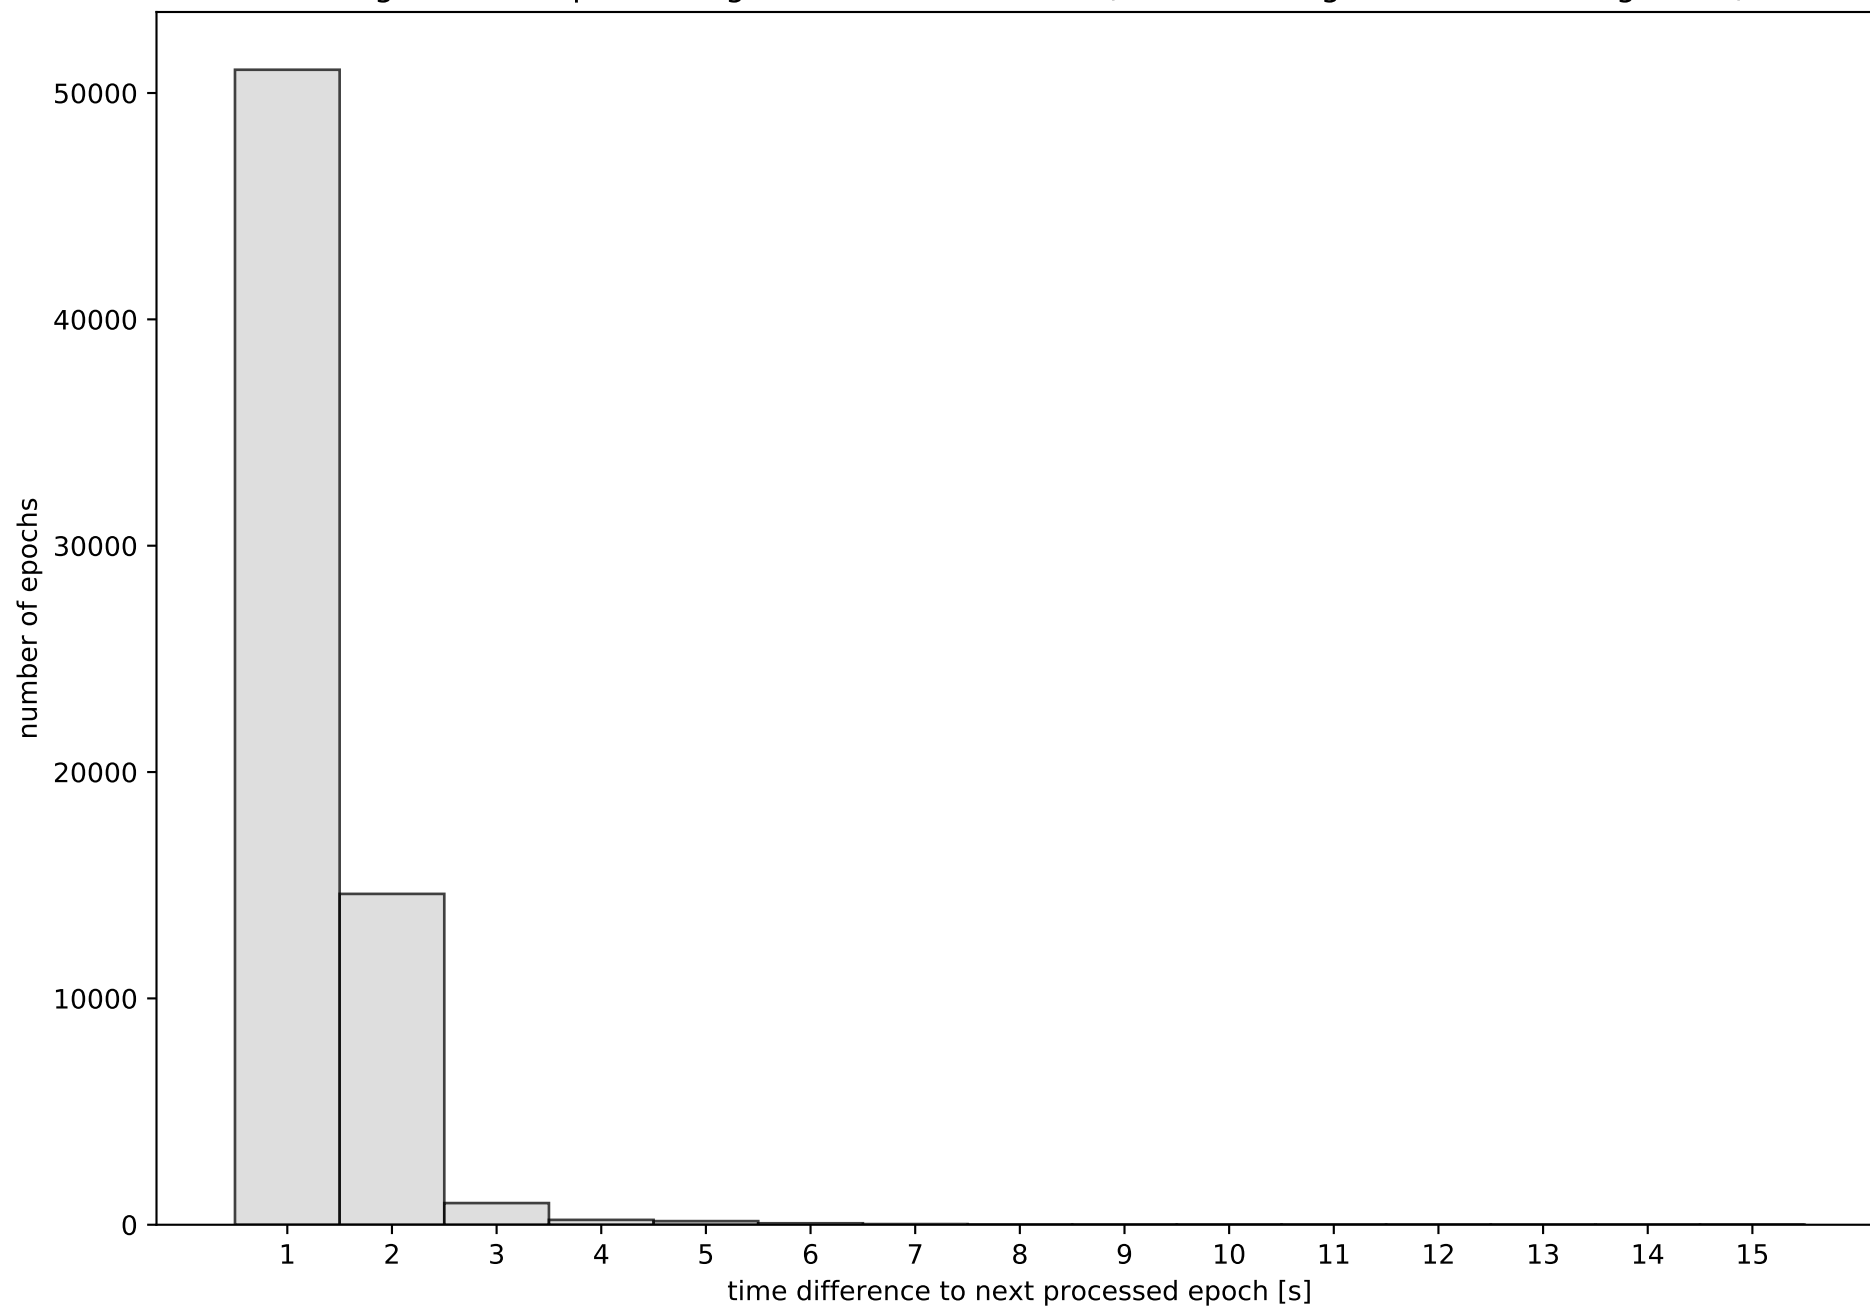


Network NT32 with threshold set to 0.3

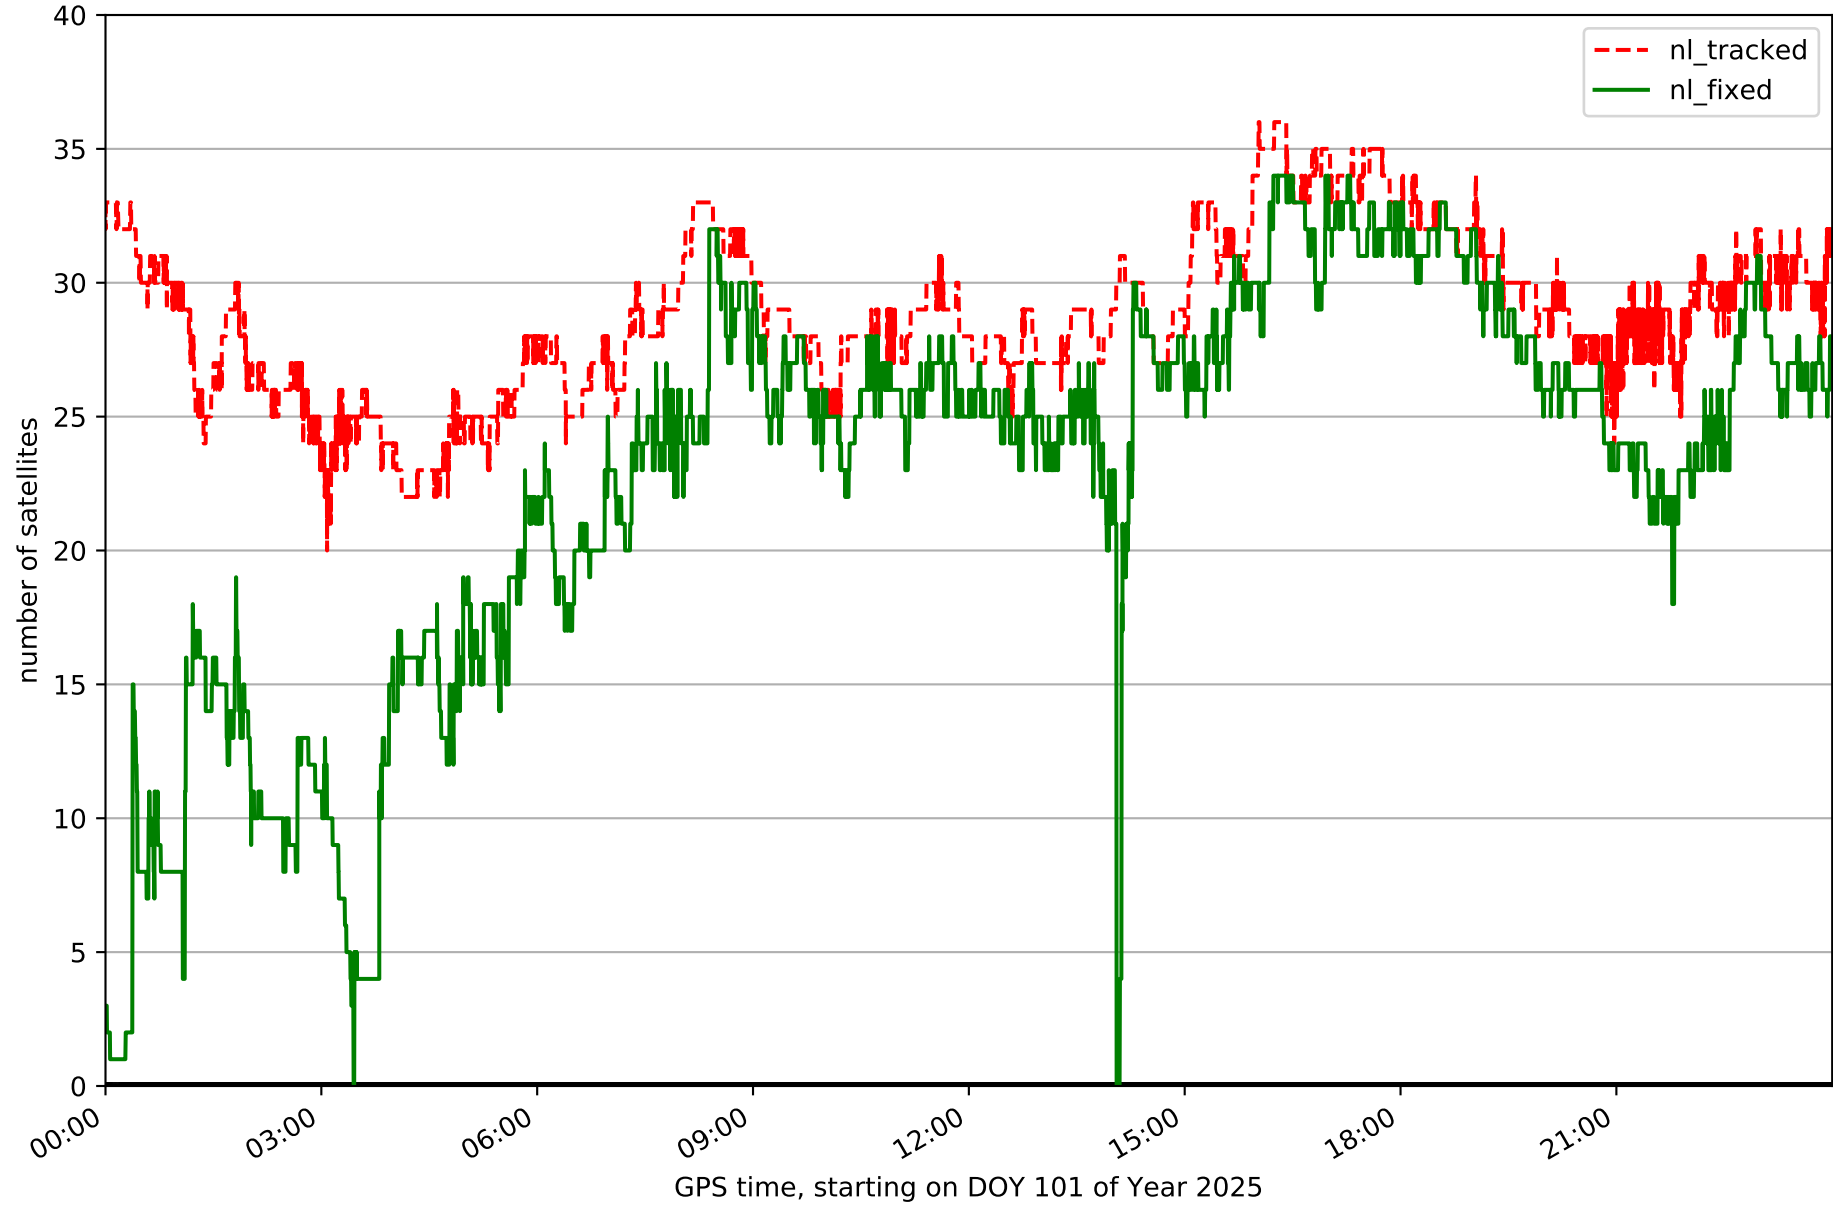


Fixing percentage of satellites in network NT32 with threshold set to 0.3

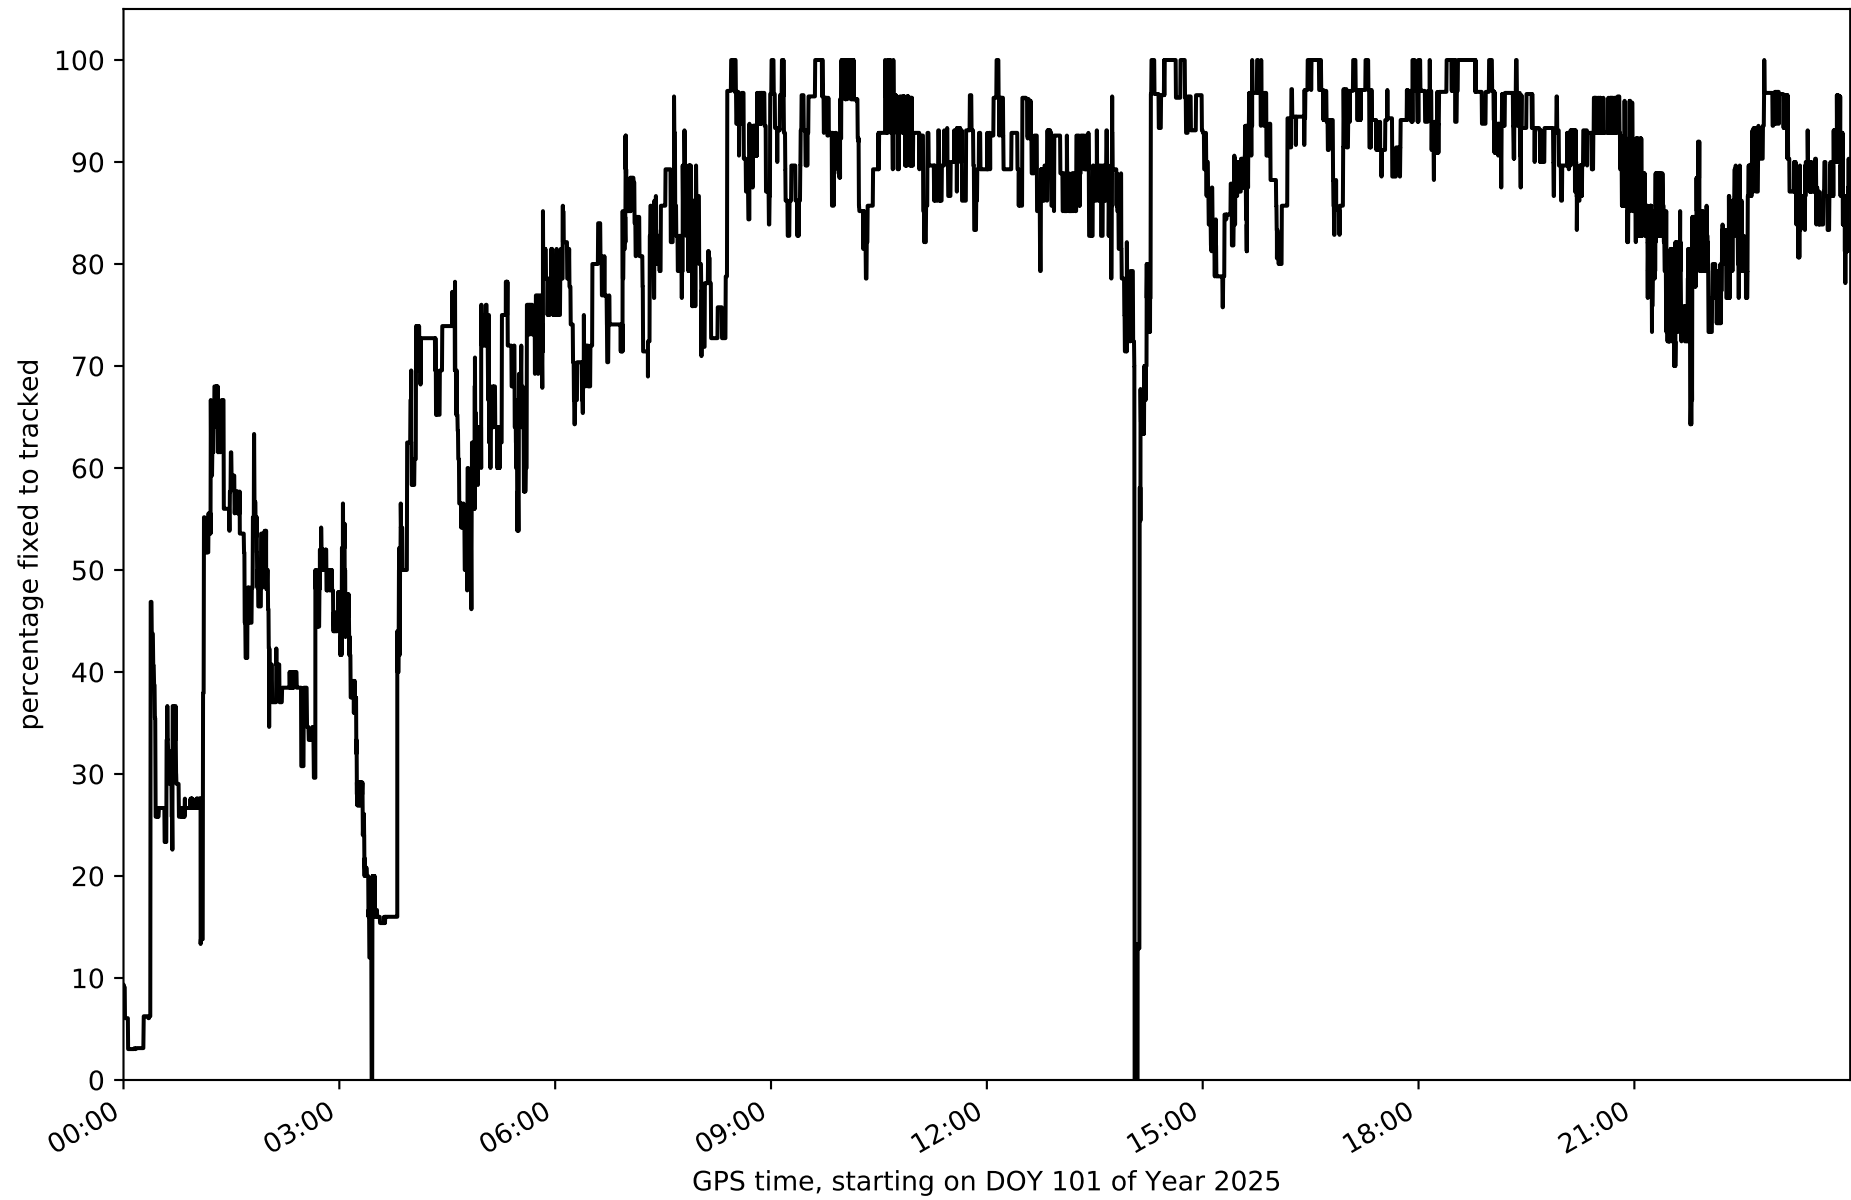


Network NT32 - only GPS with threshold set to 0.3

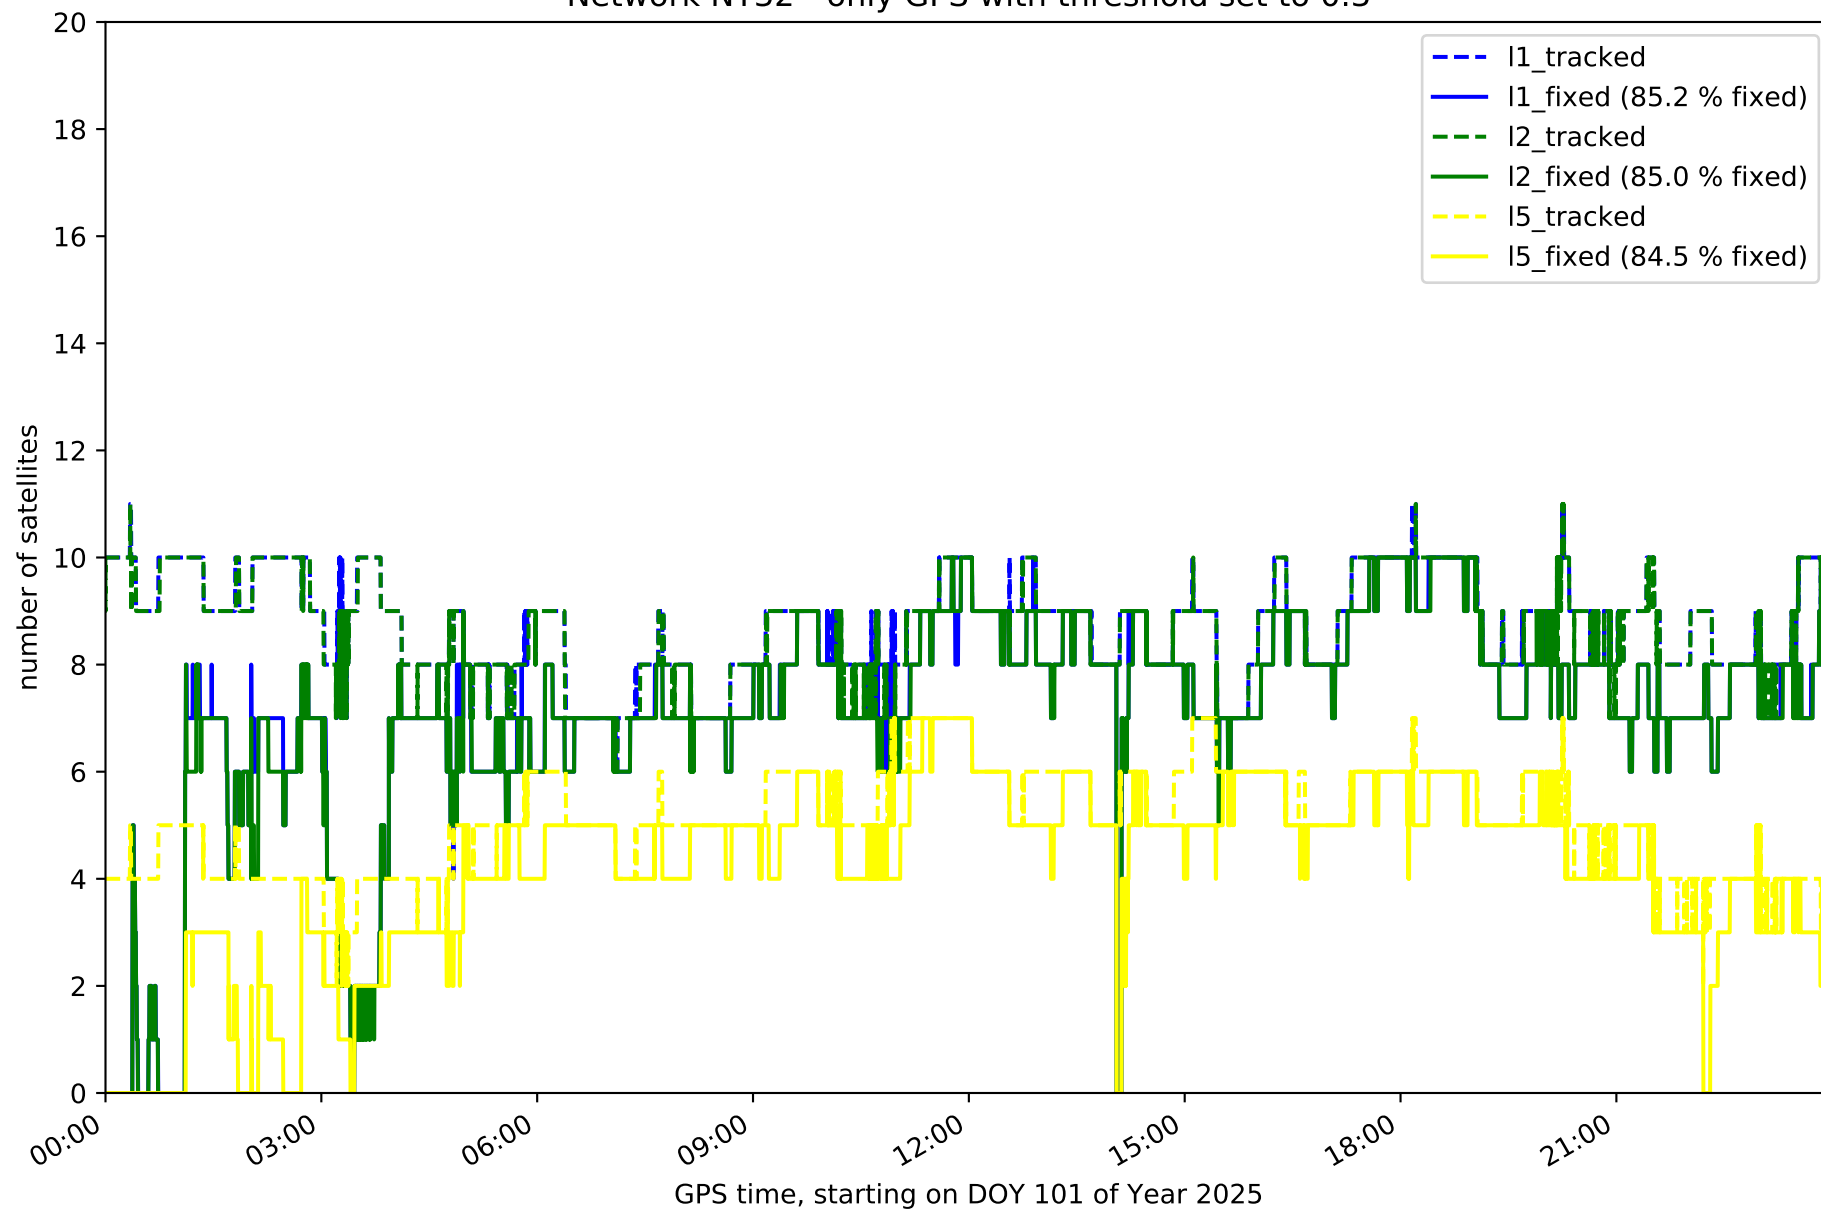


Network NT32 - only GLONASS with threshold set to 0.3

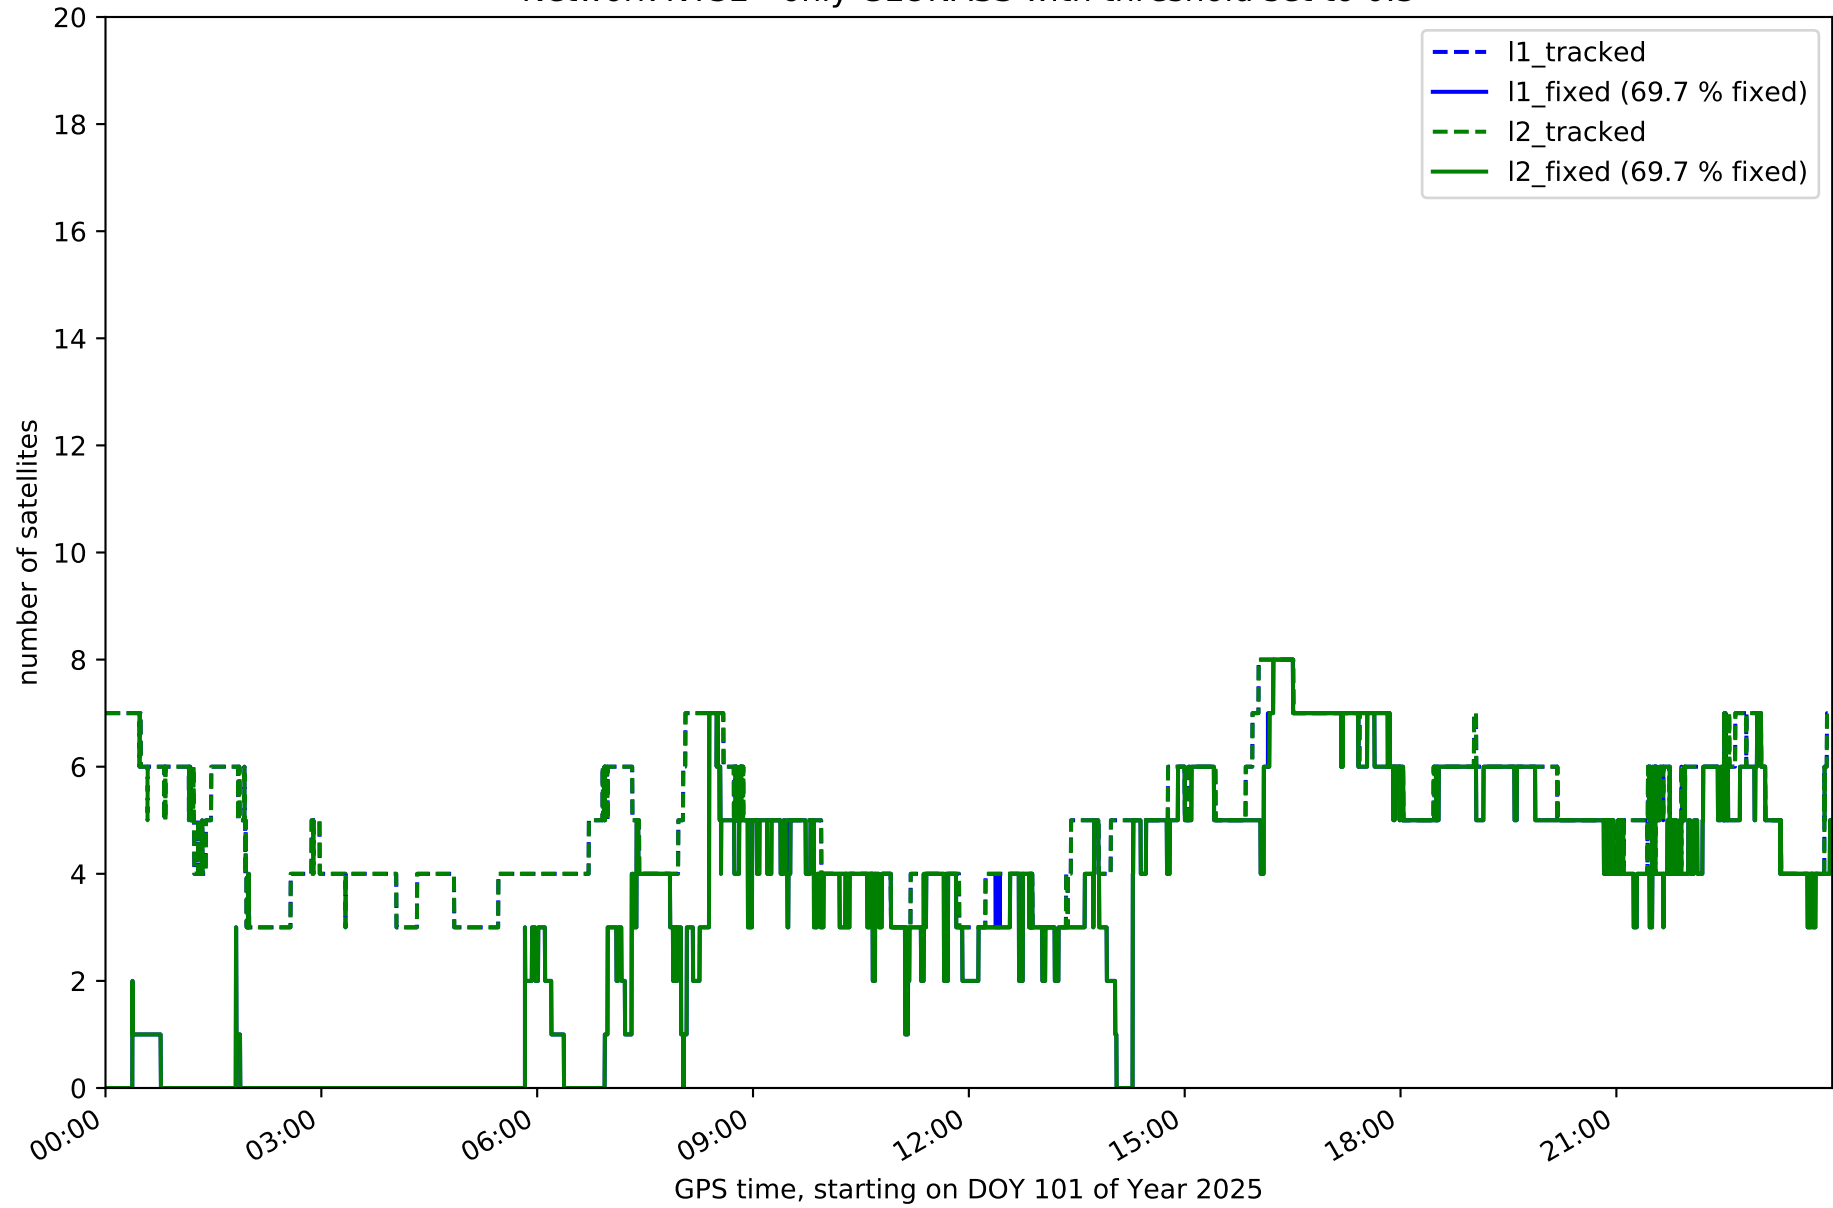


Network NT32 - only BDS with threshold set to 0.3

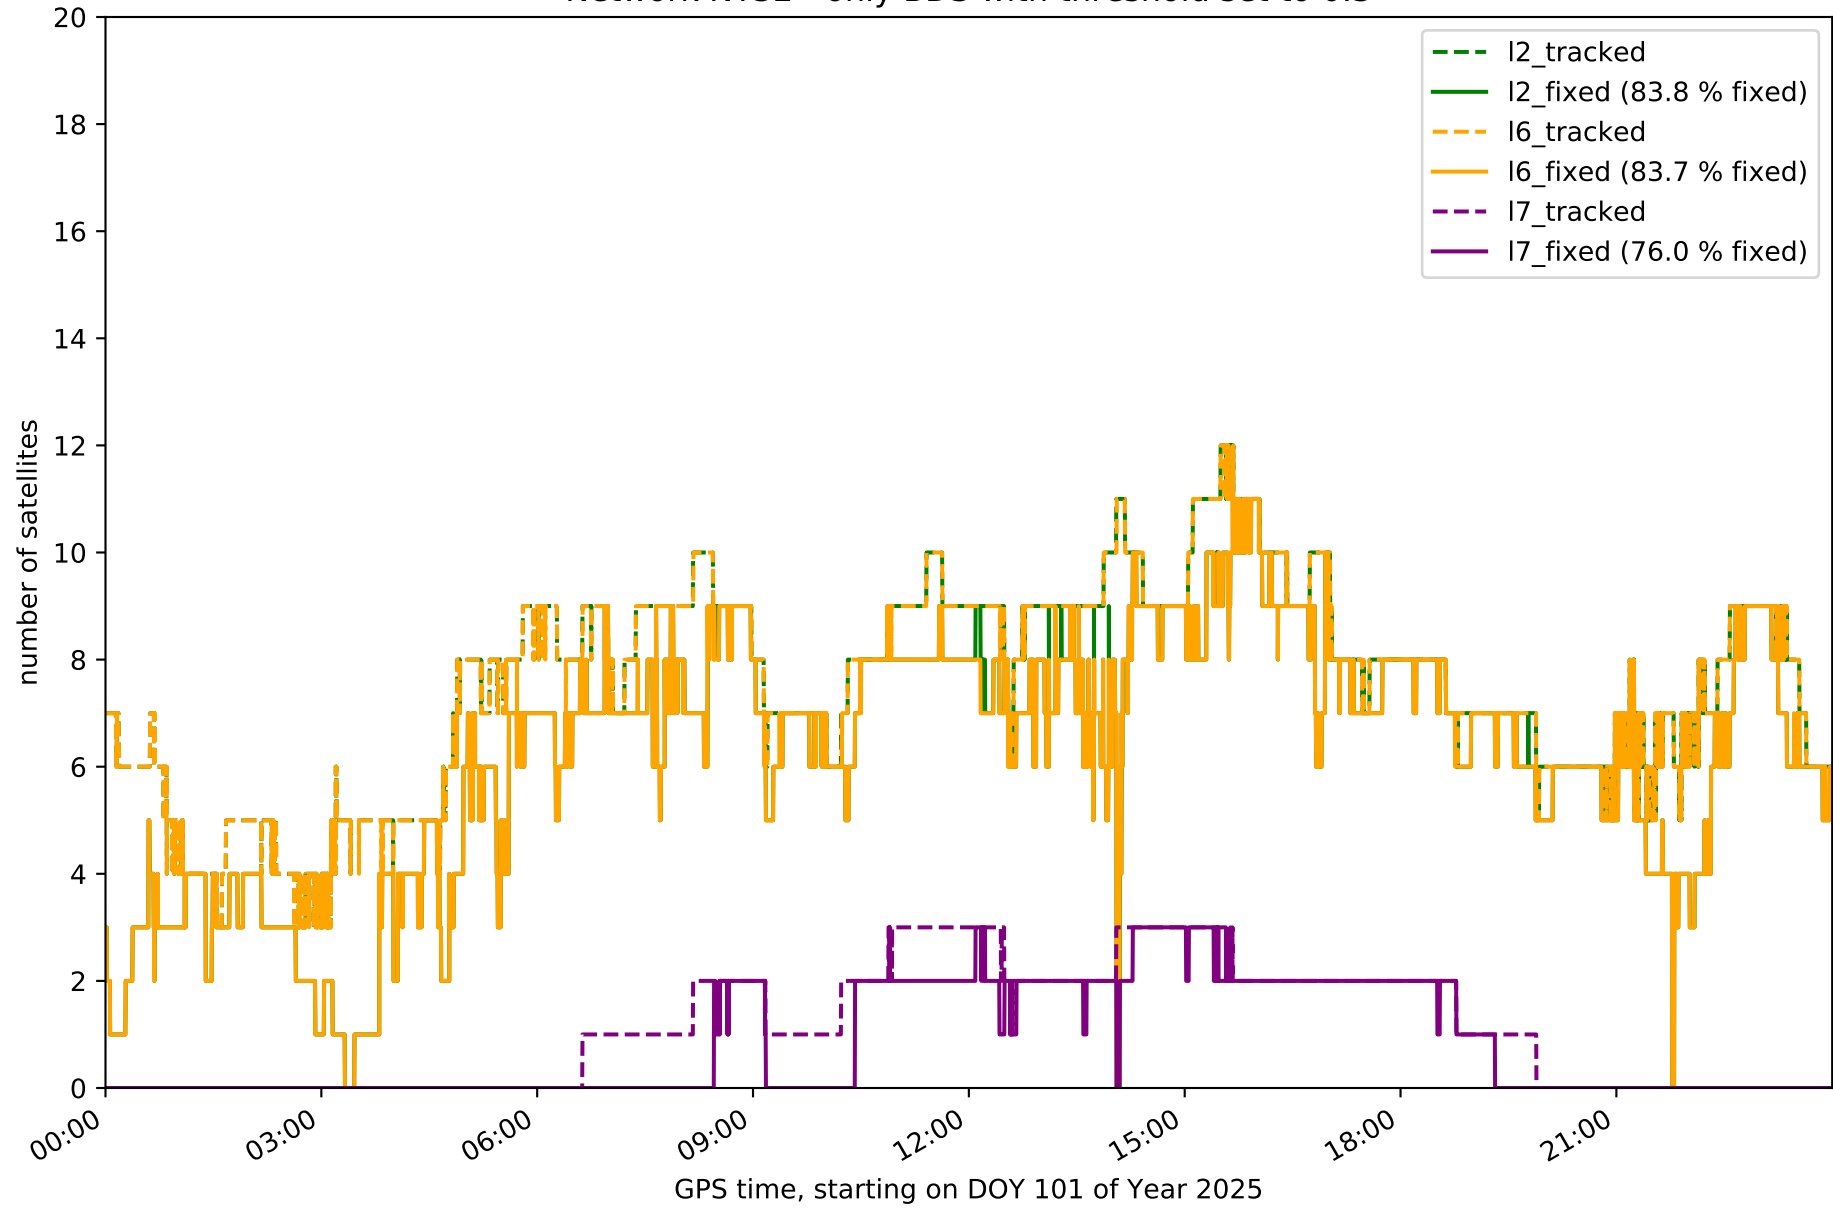


Network NT32 - only Galileo with threshold set to 0.3

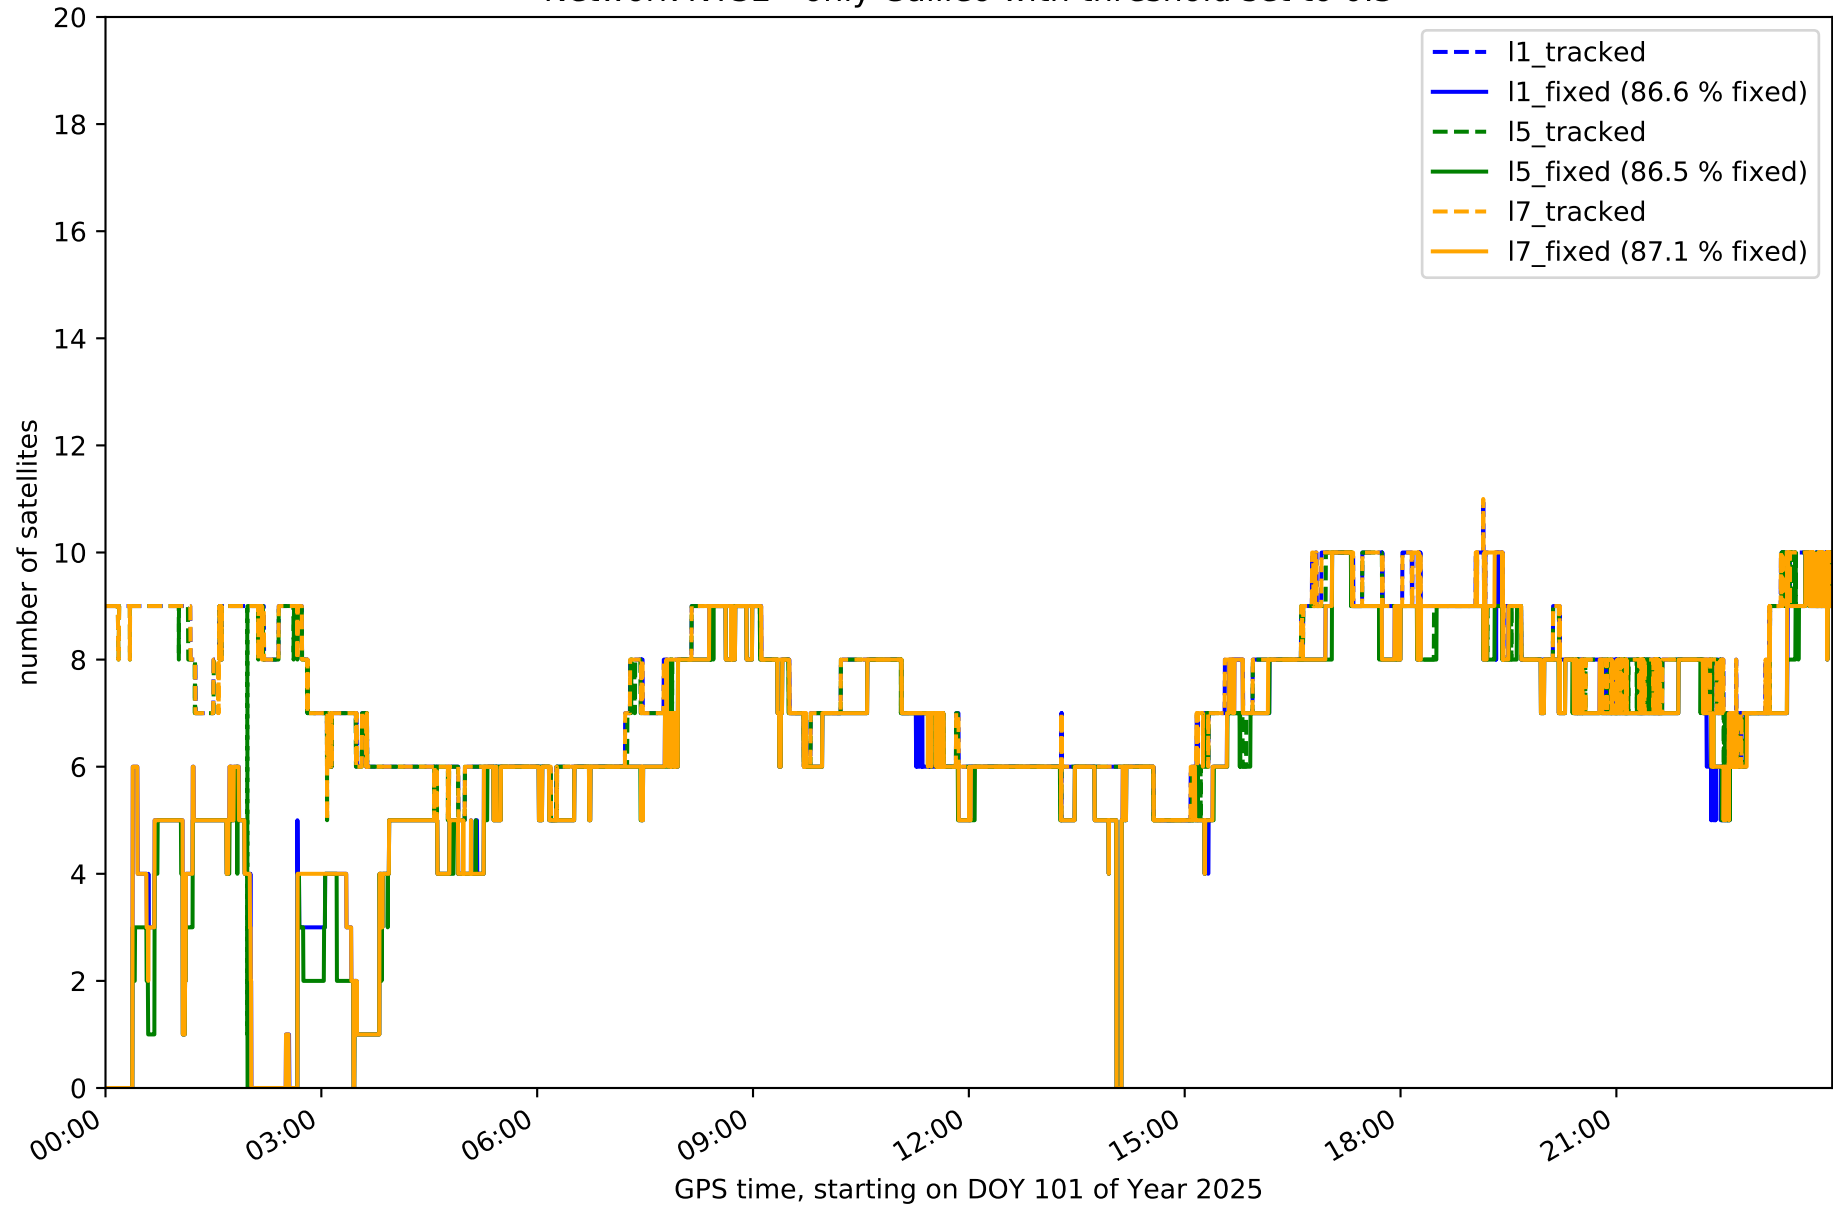


Station EH01 in network NT32

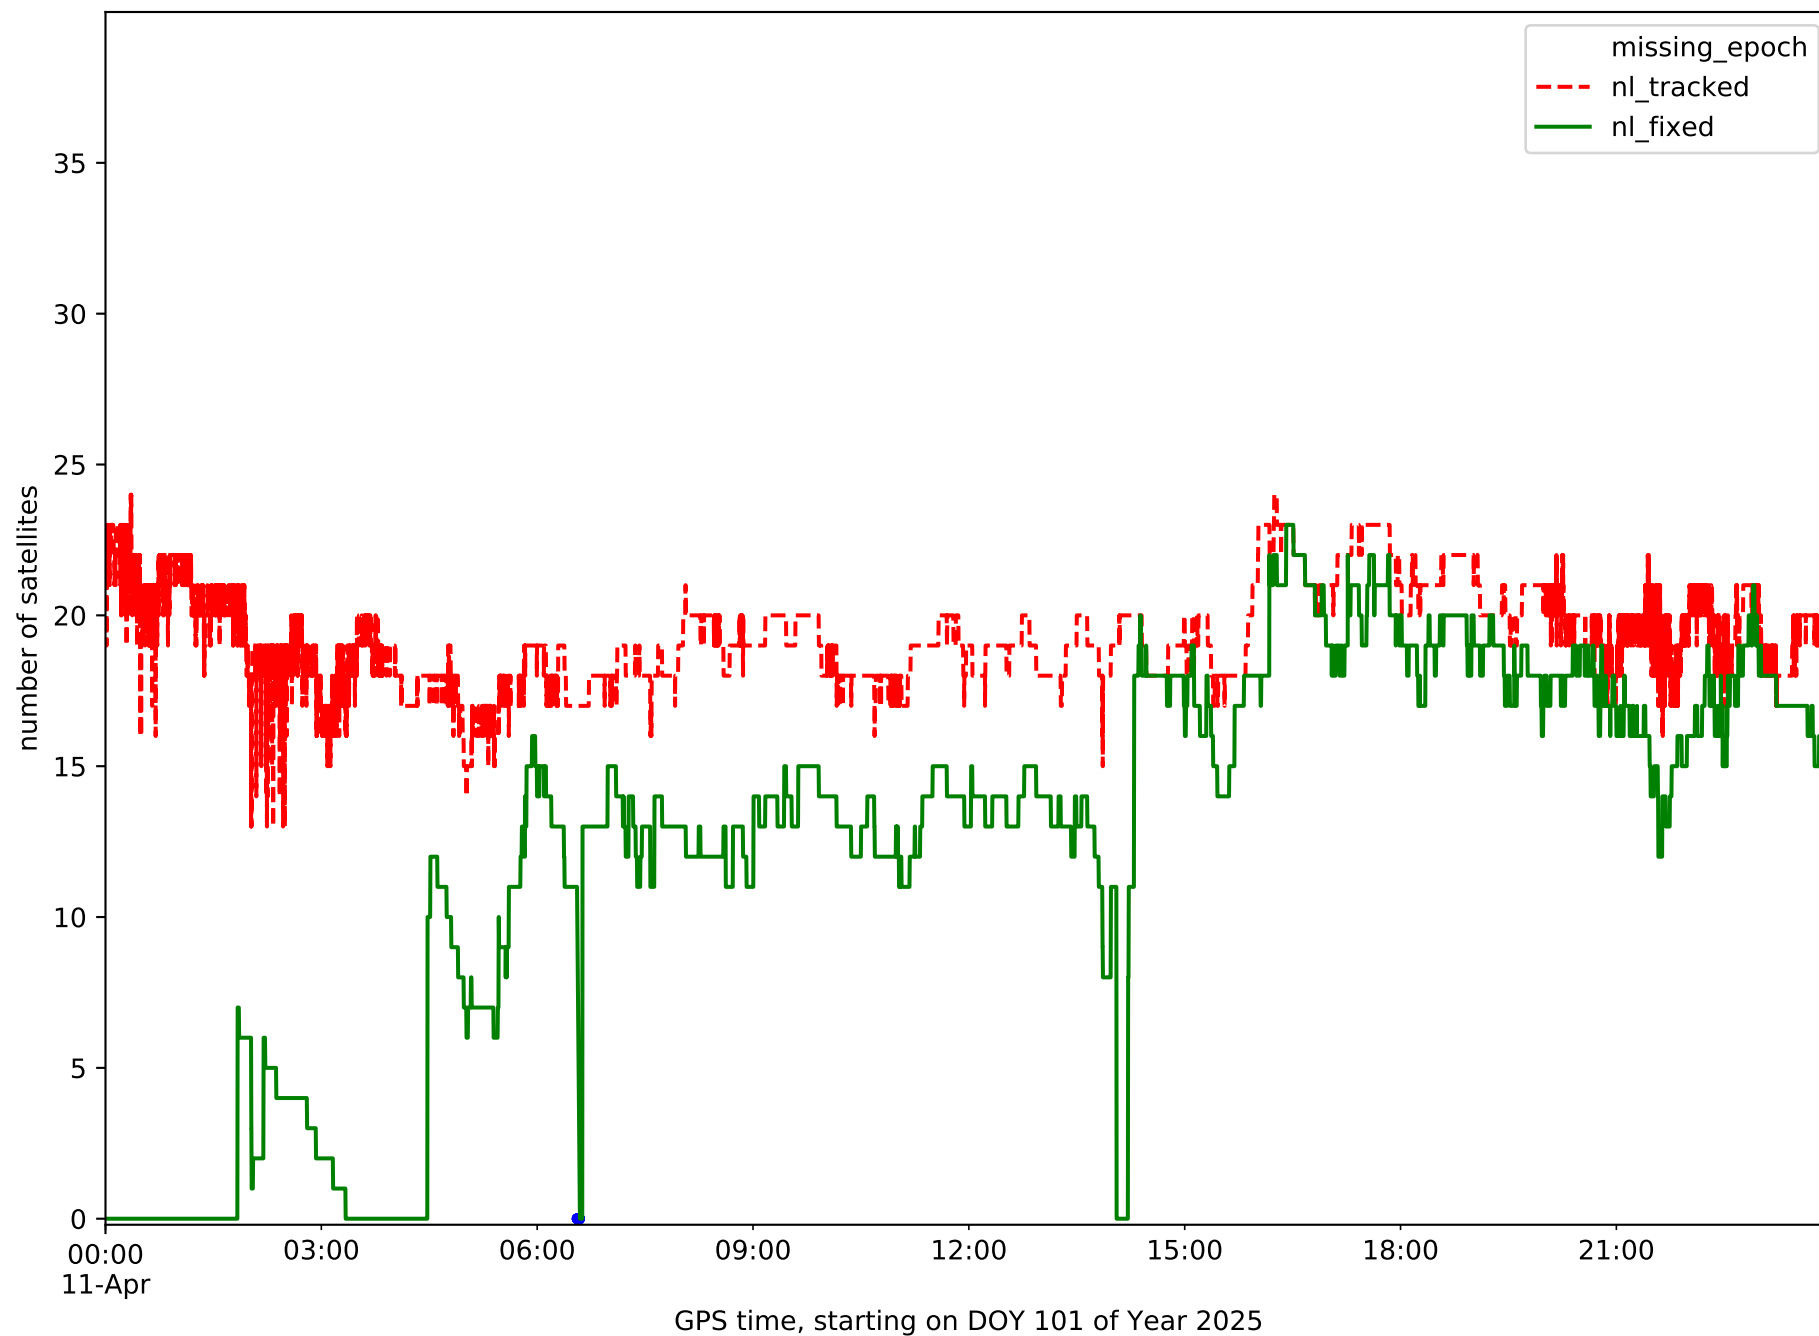


Station EH02 in network NT32

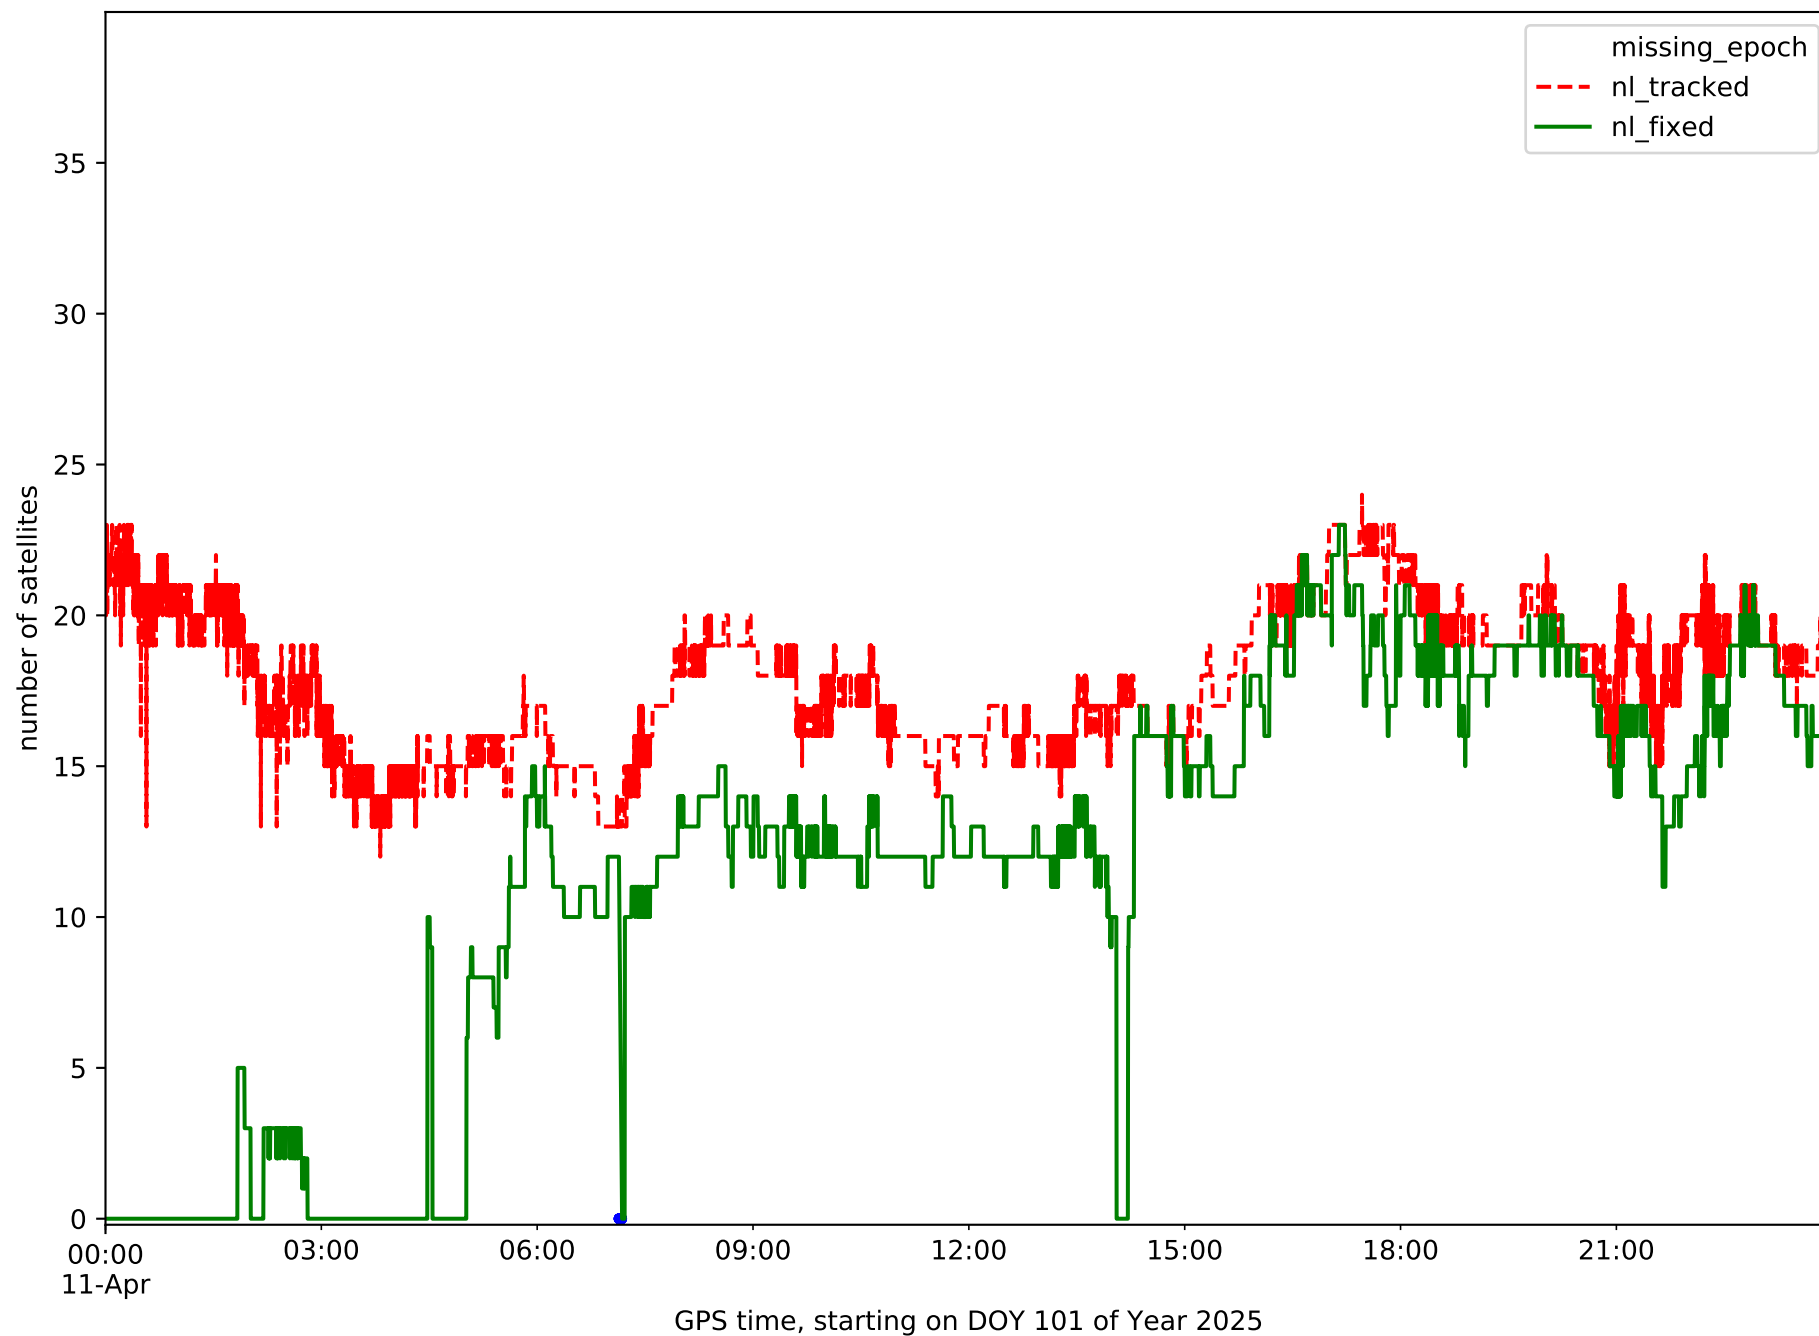


Station GOM1 in network NT32

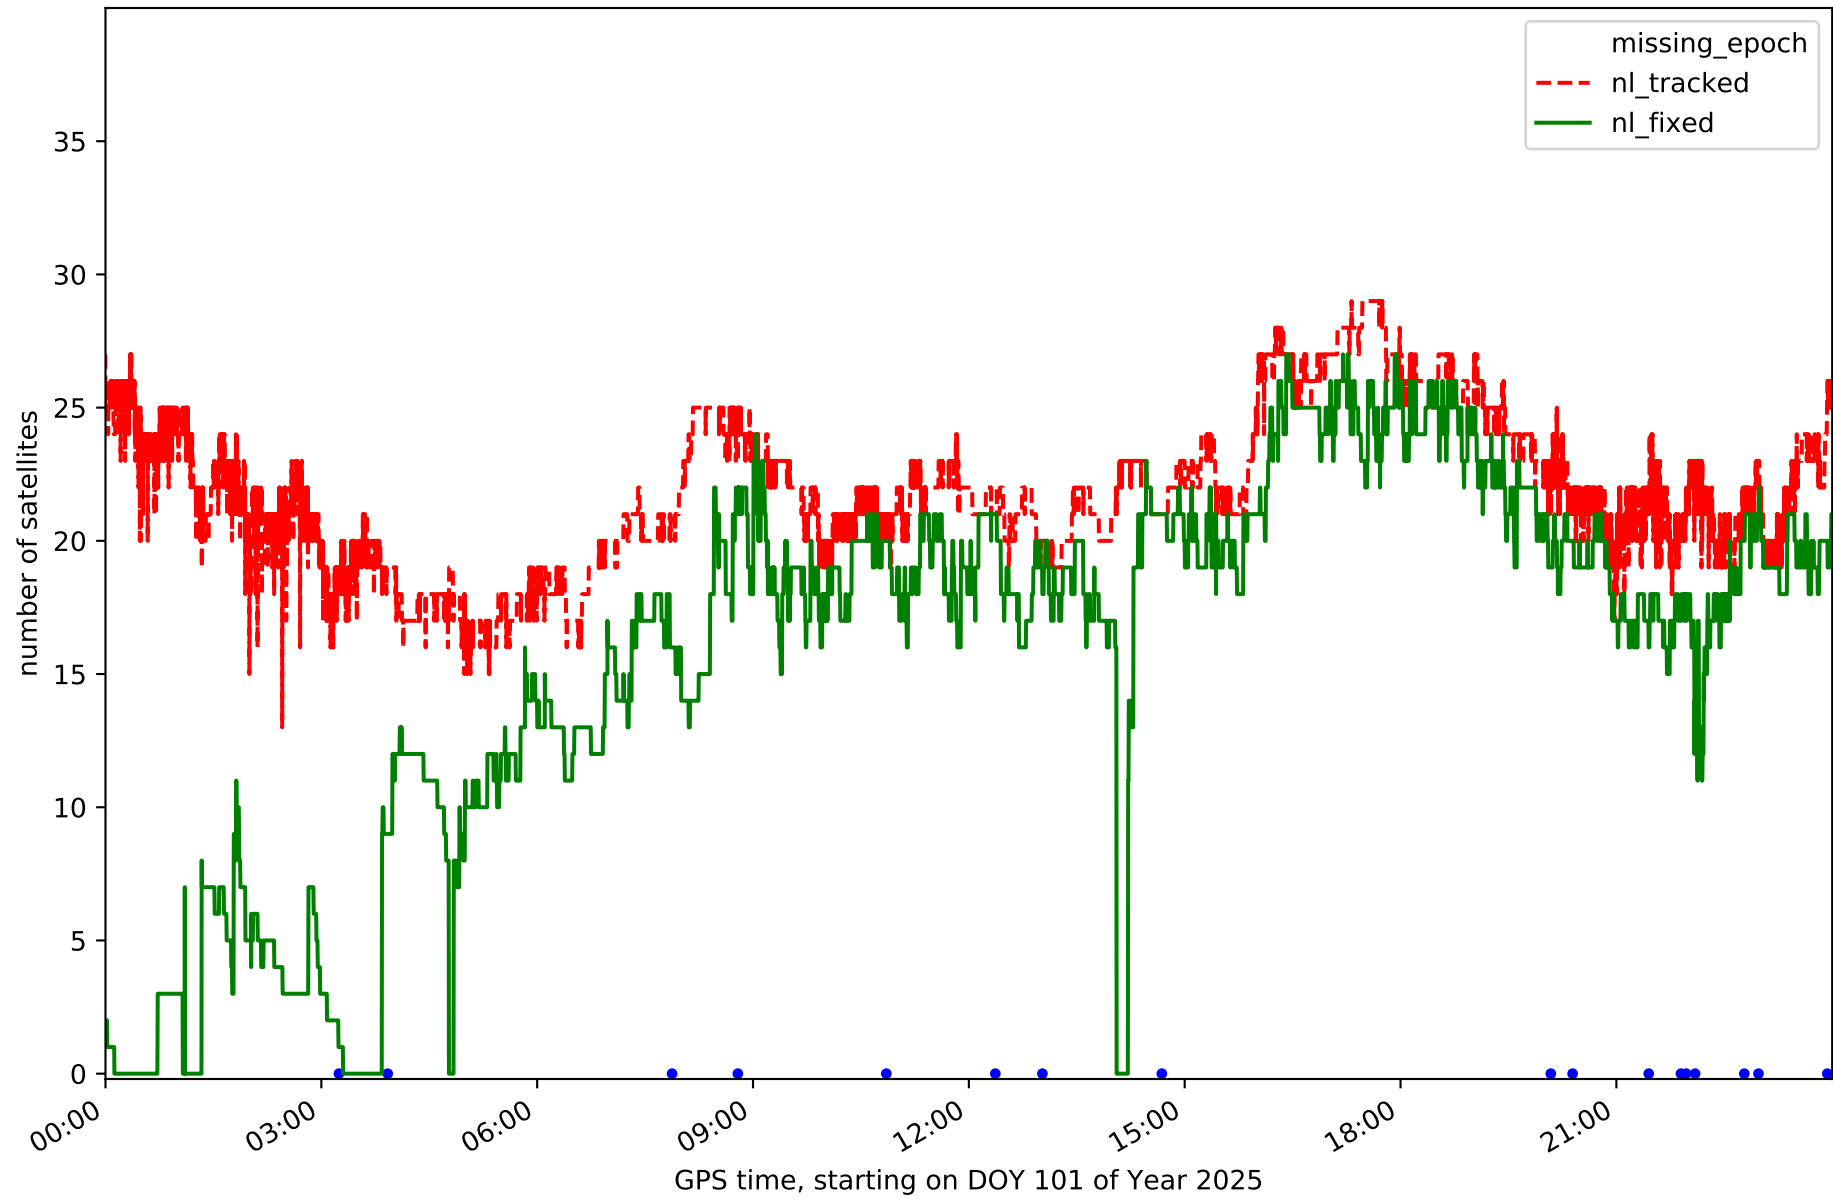


Station IZAN in network NT32

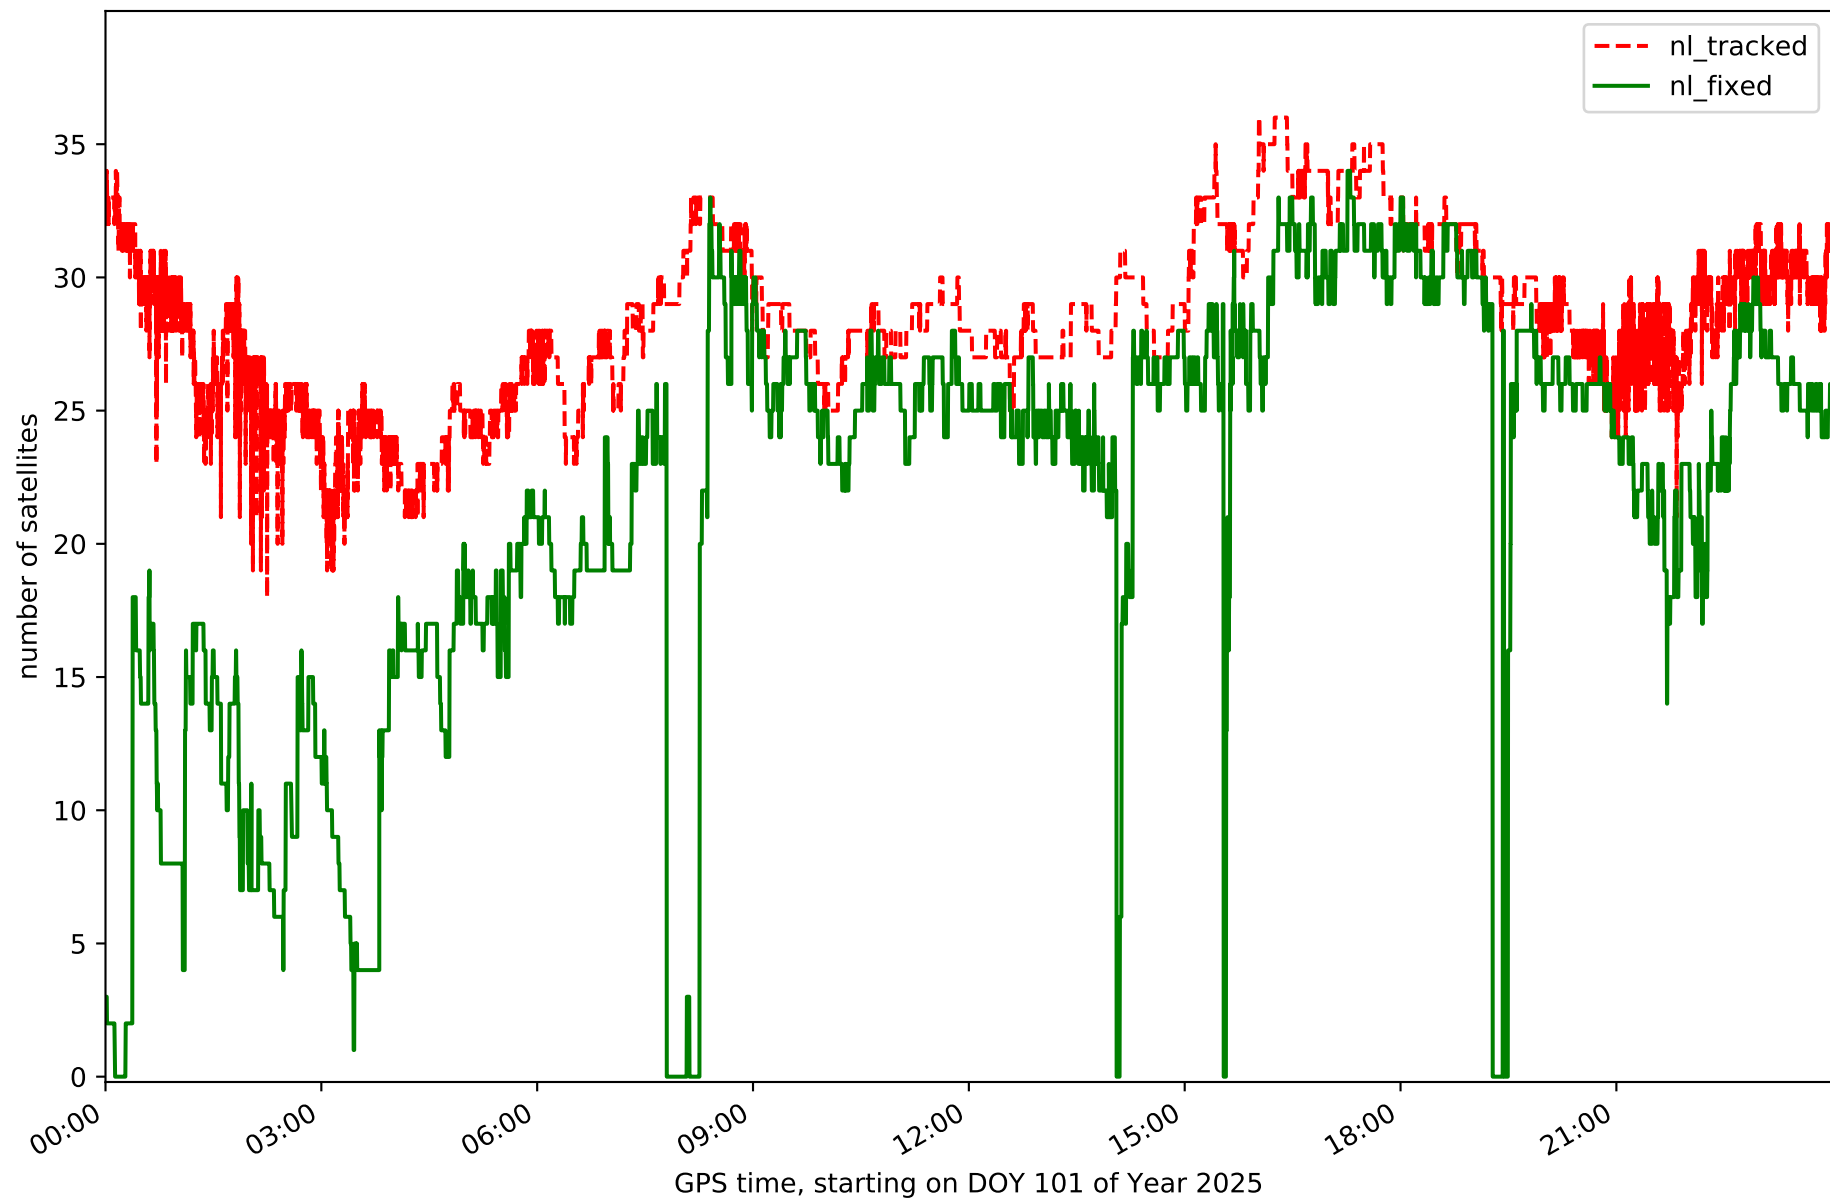


Station LP01 in network NT32

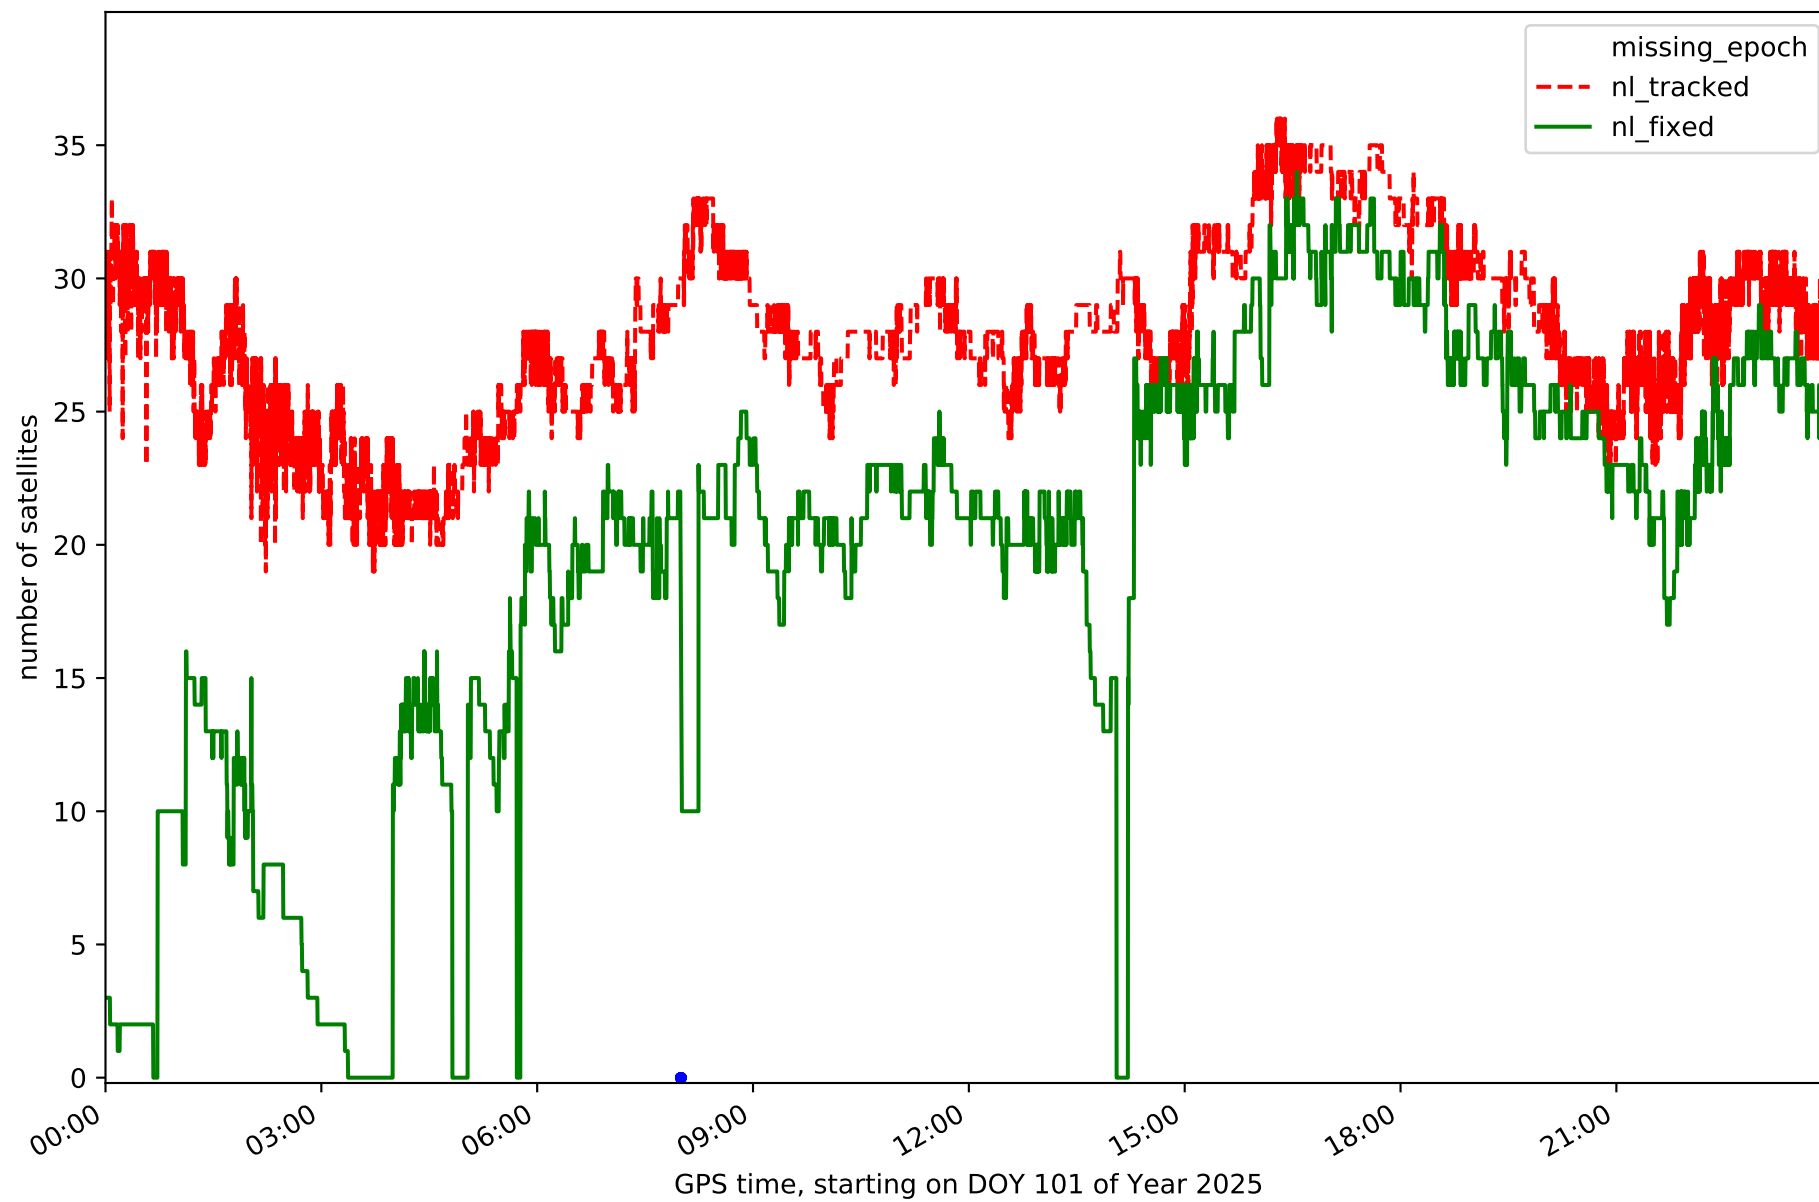


Station LP03 in network NT32

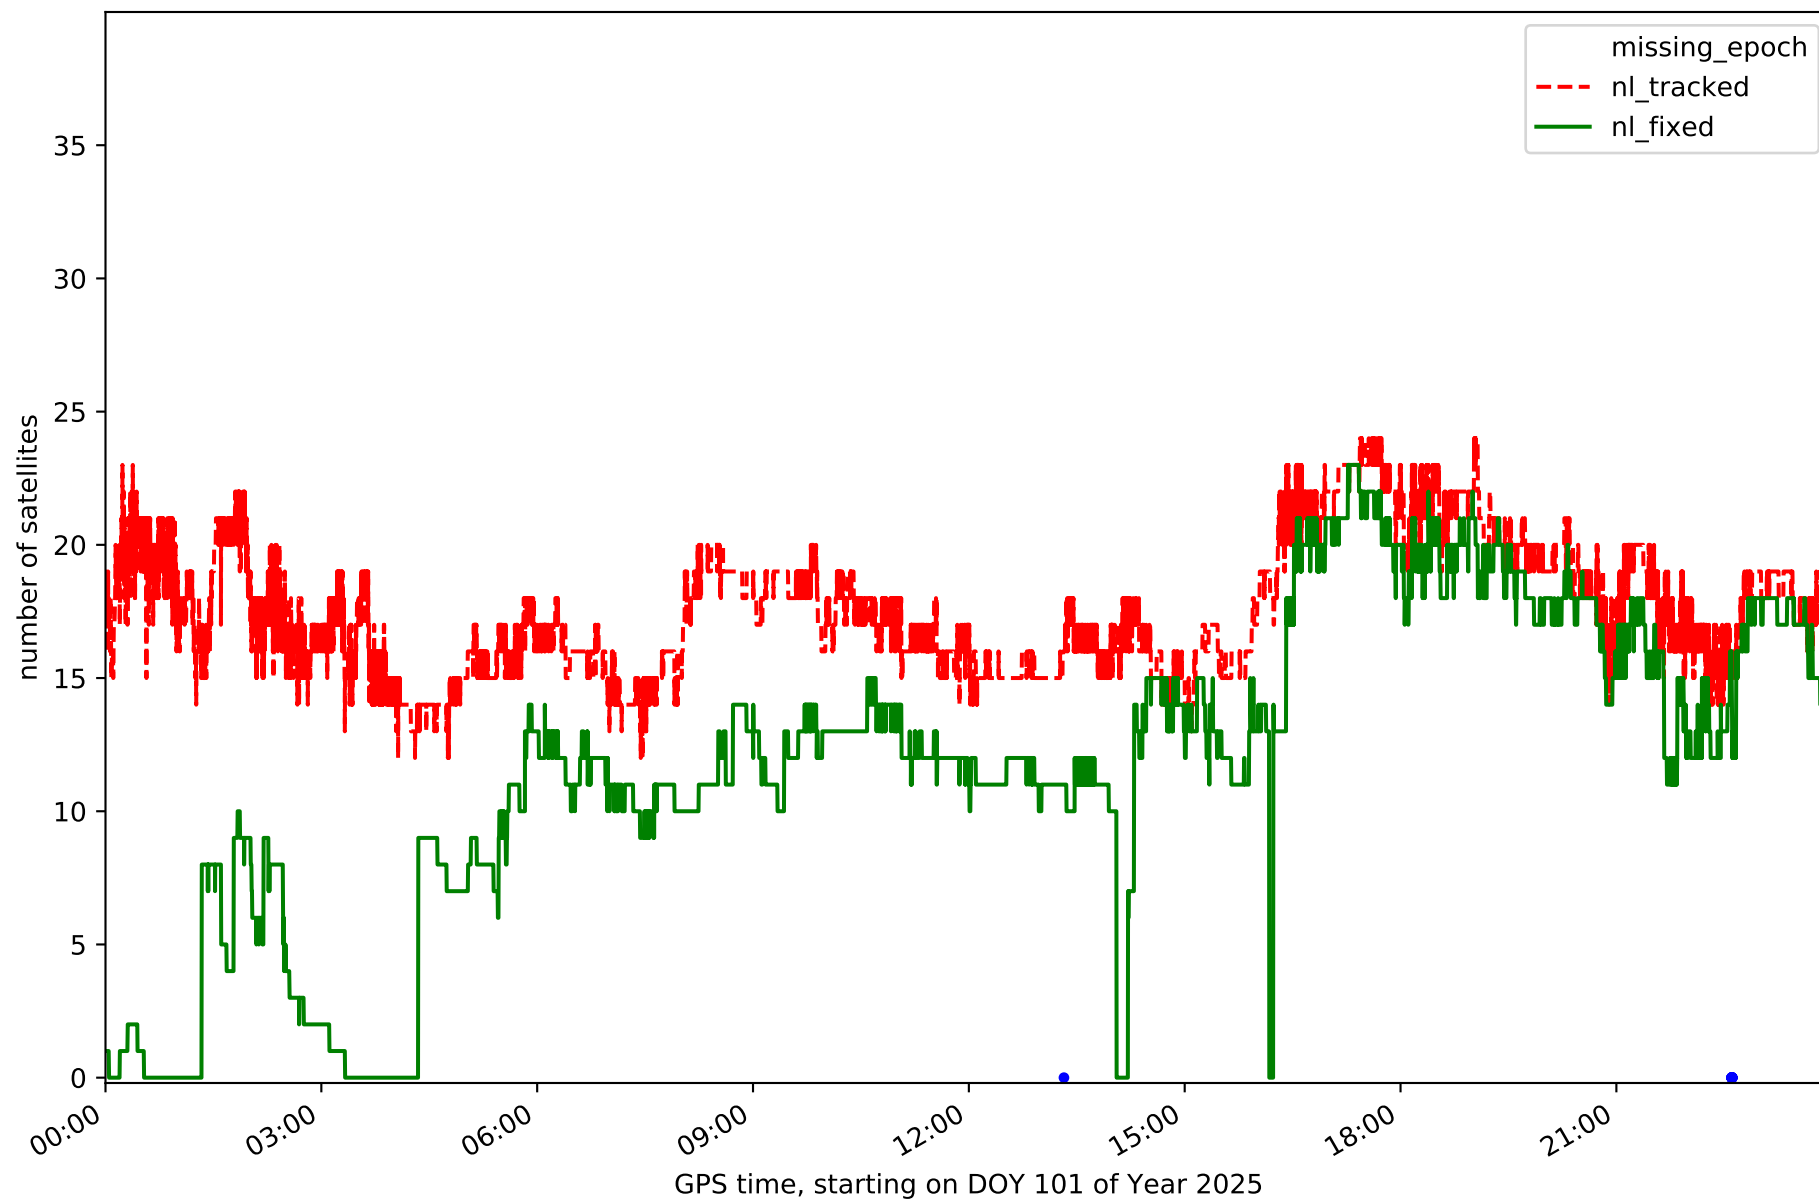


Station LPAL in network NT32

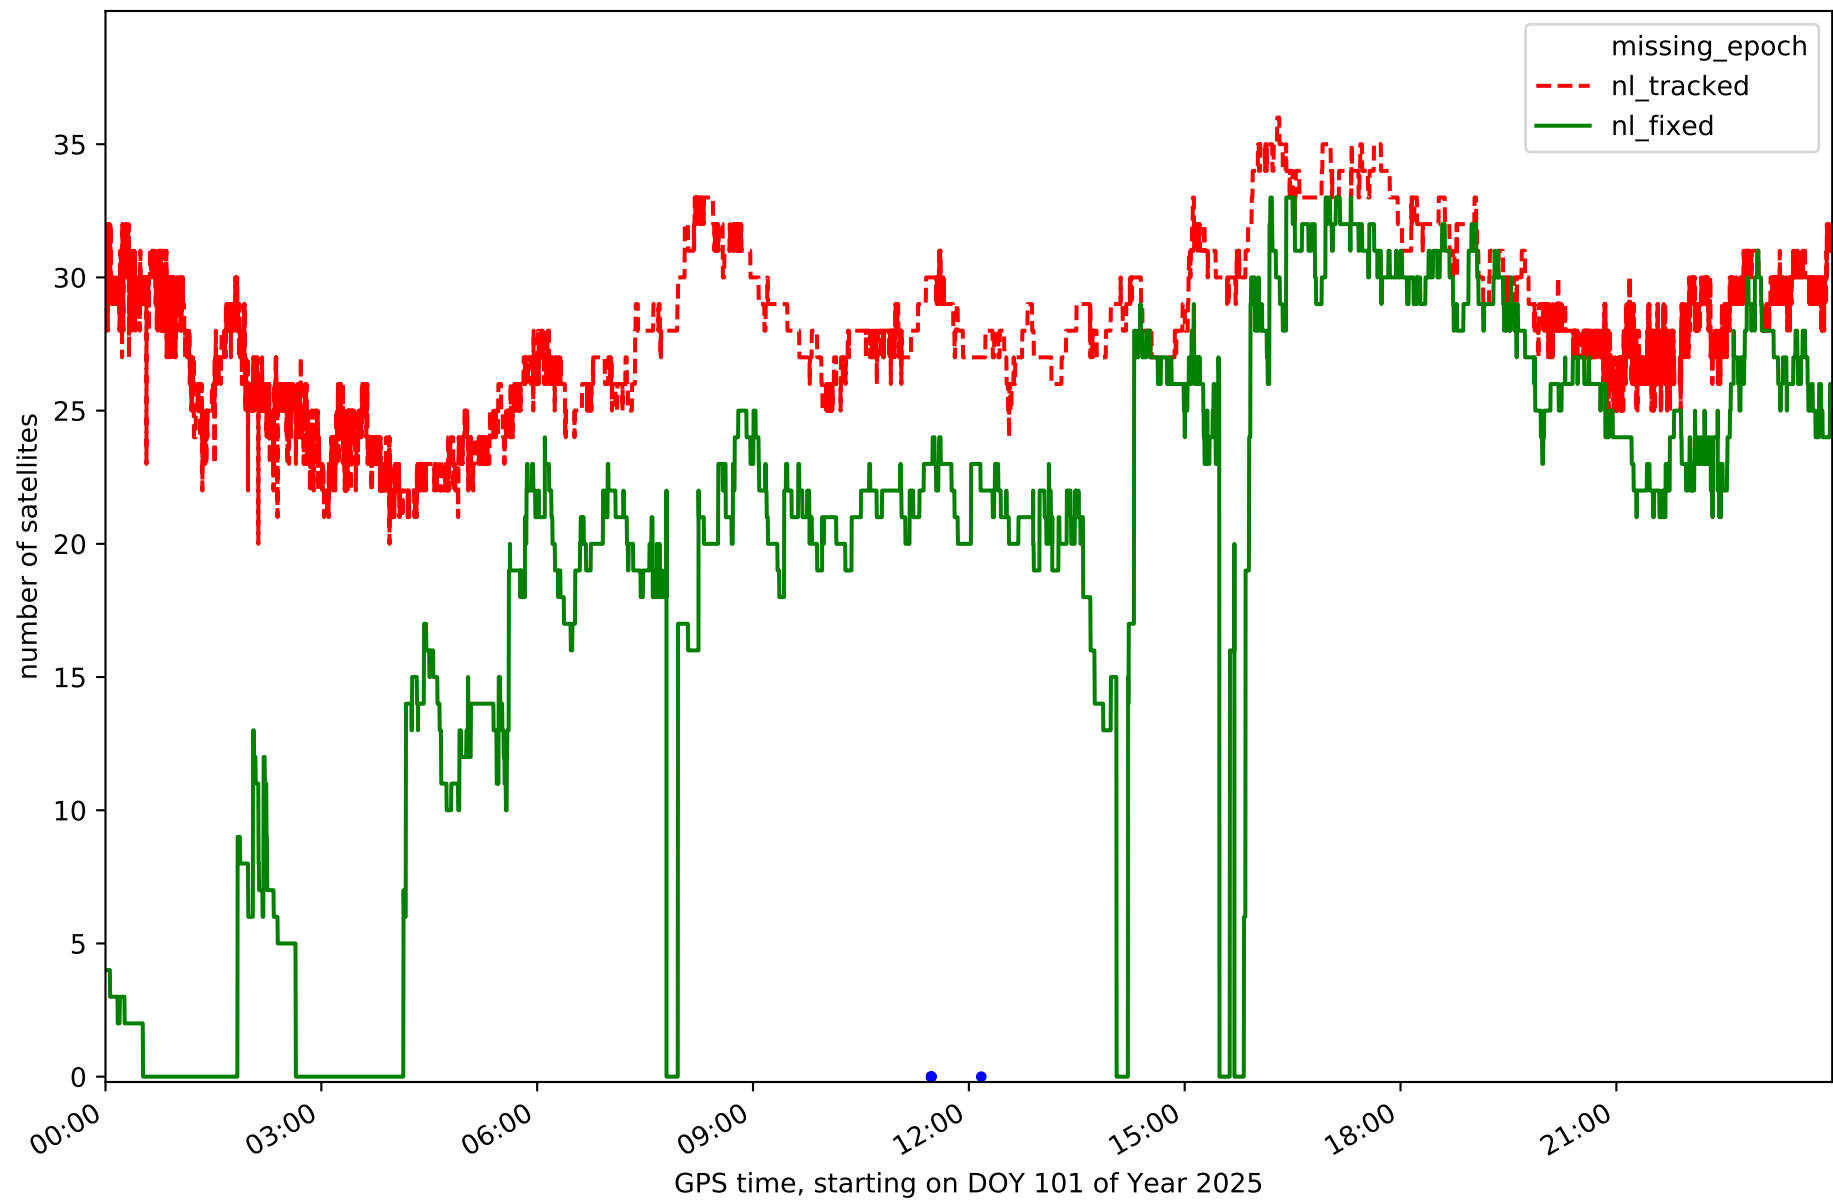


Station LRES in network NT32

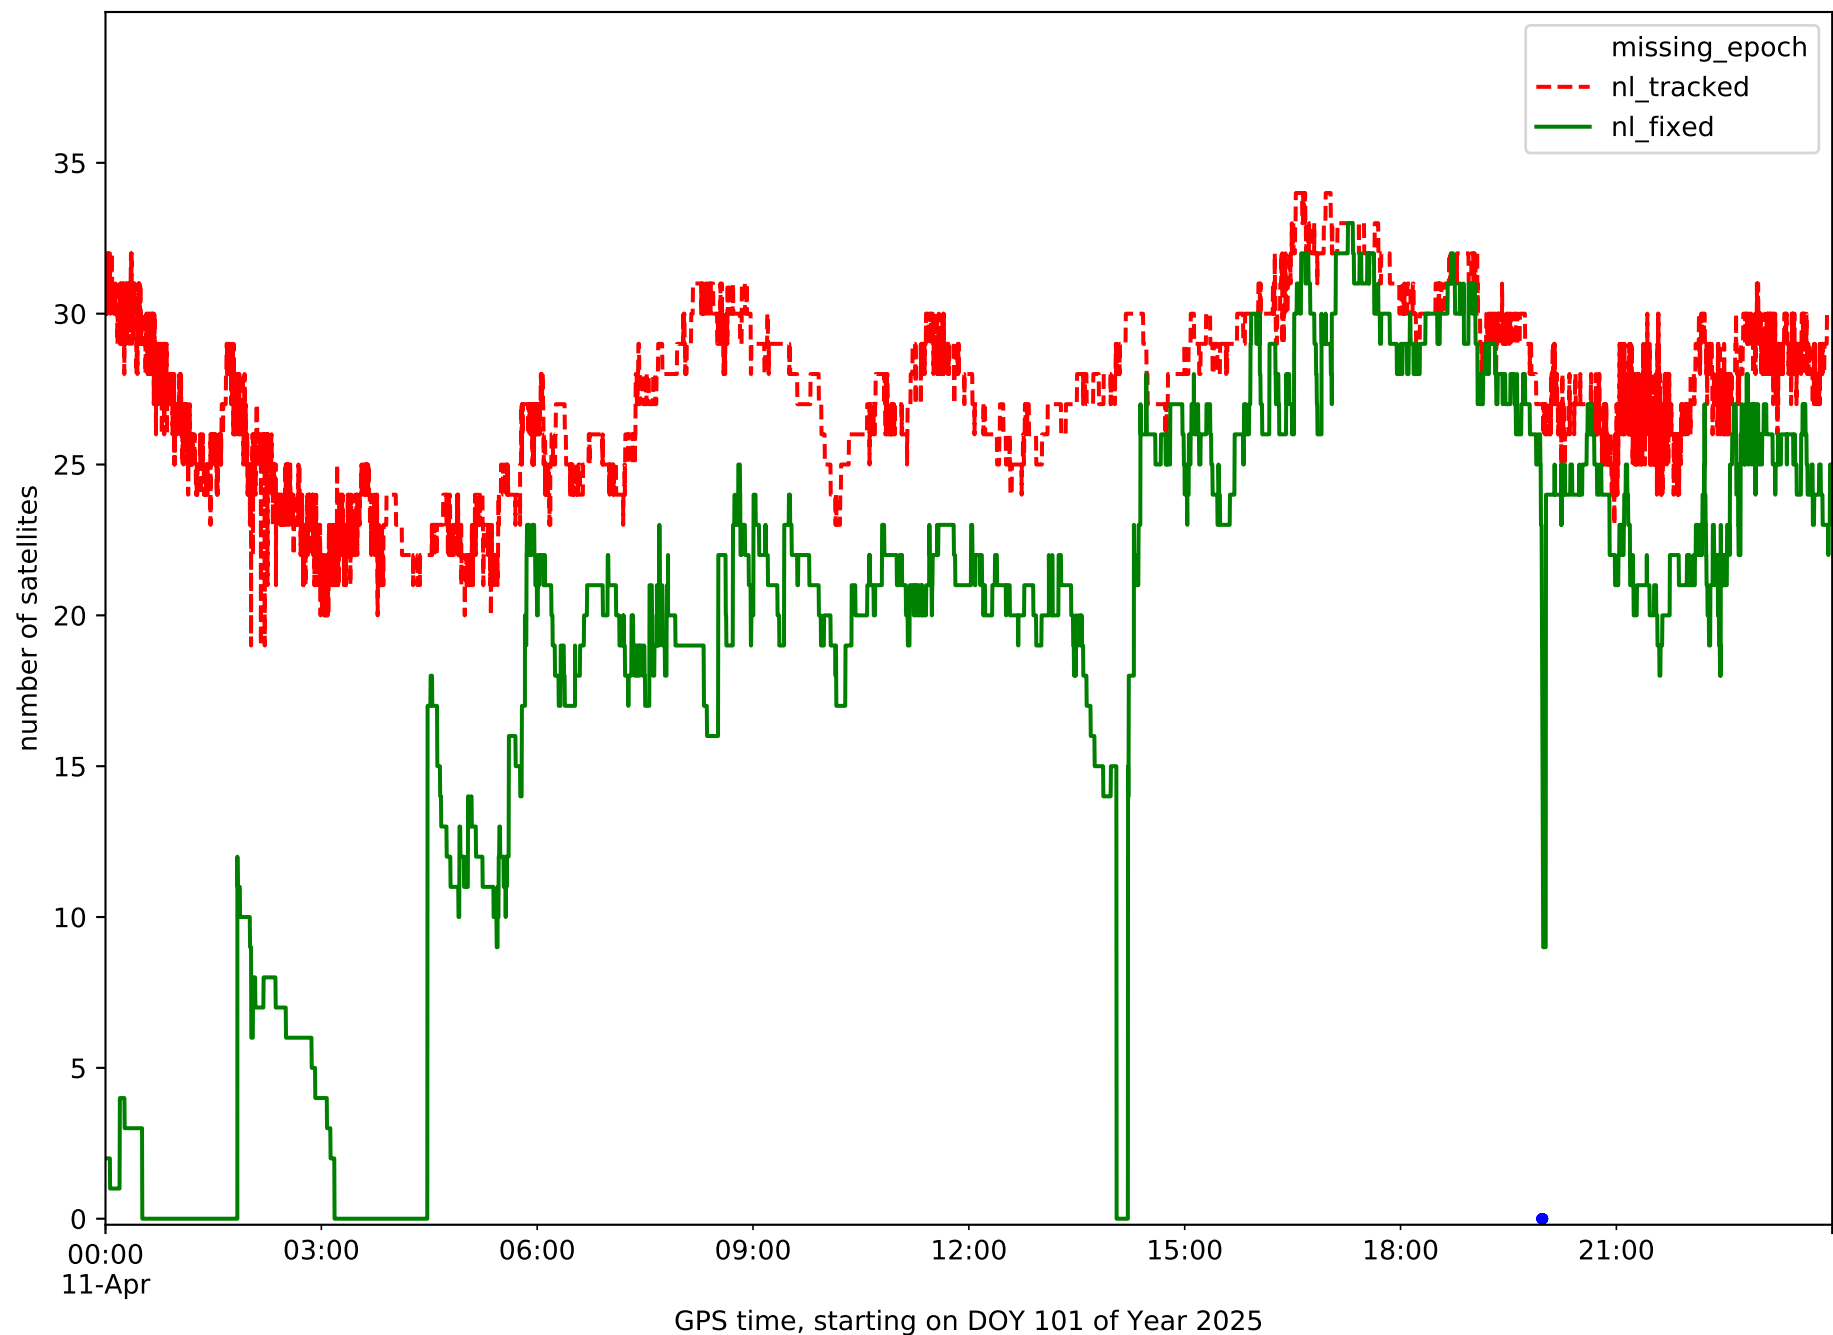


Station TN01 in network NT32

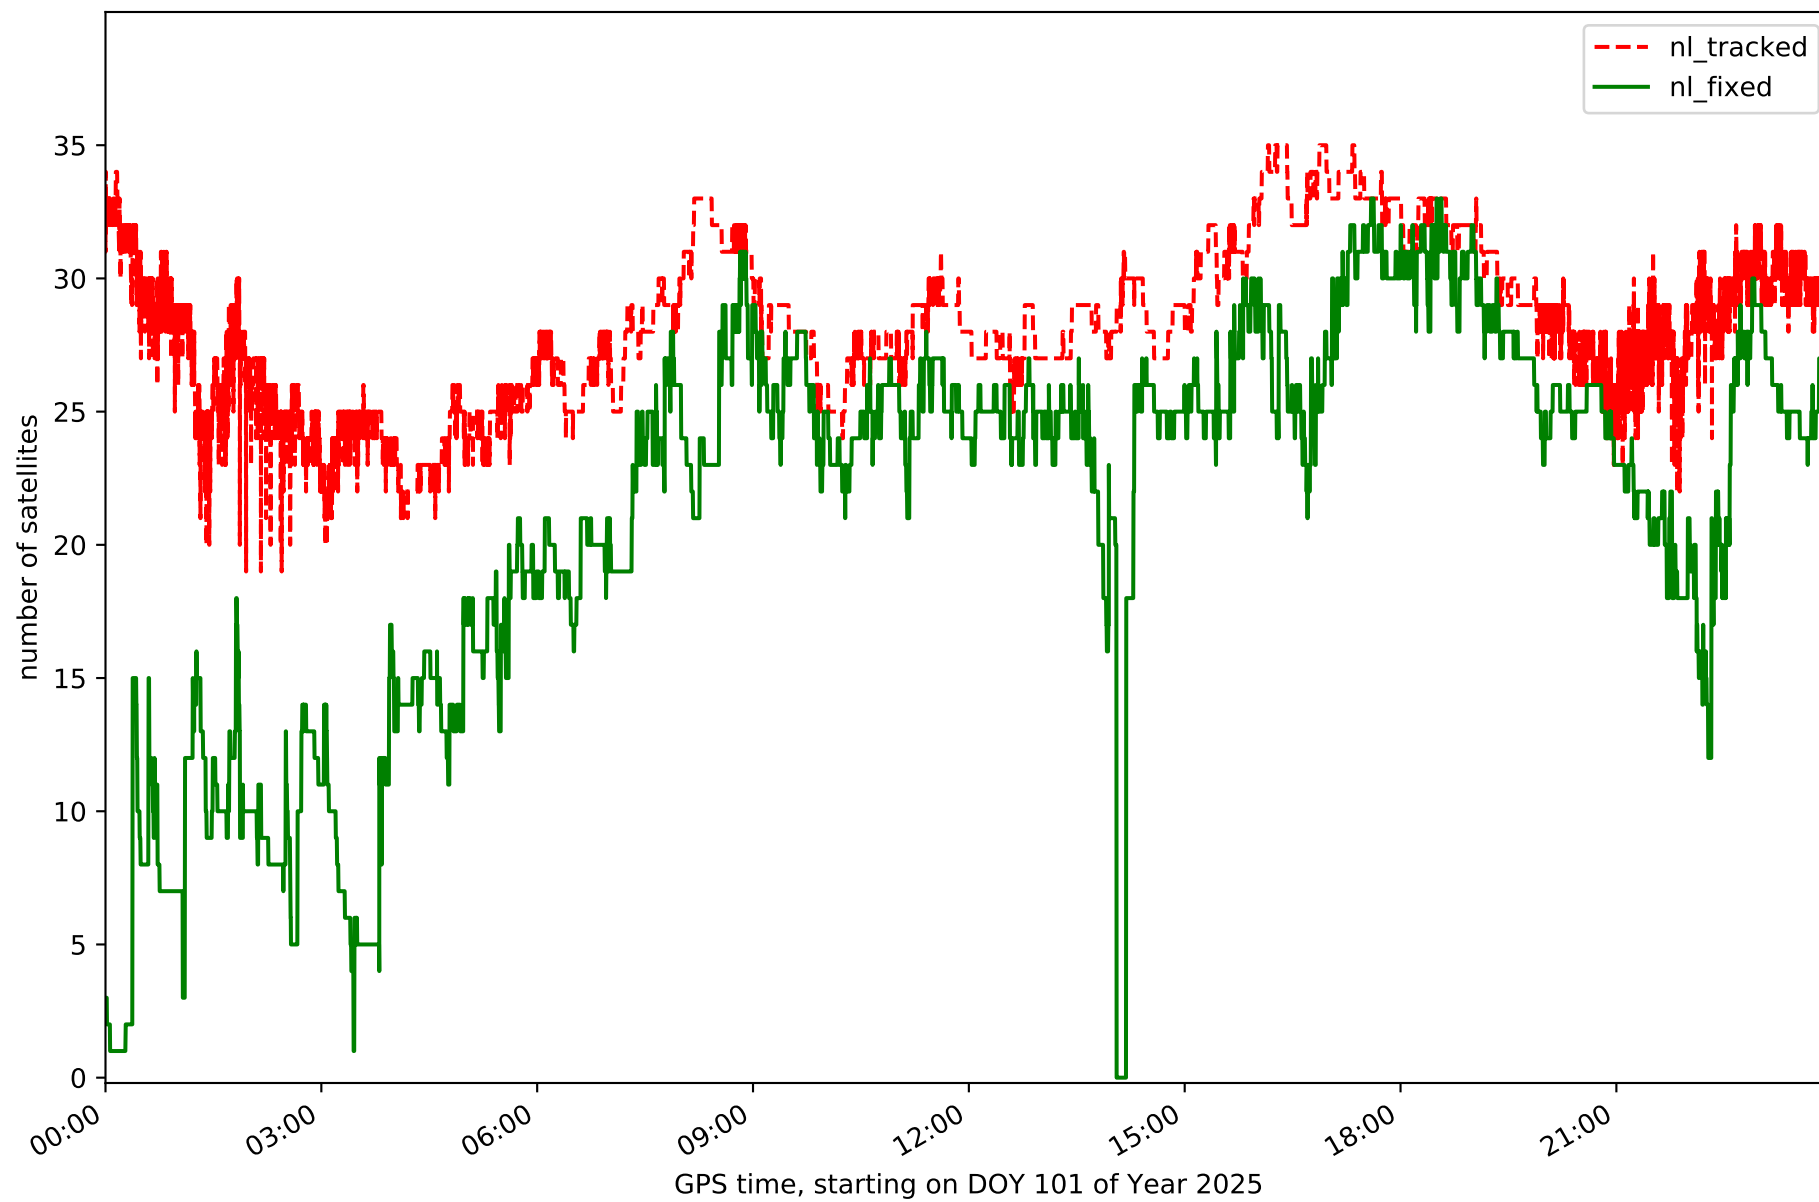


Station TN02 in network NT32

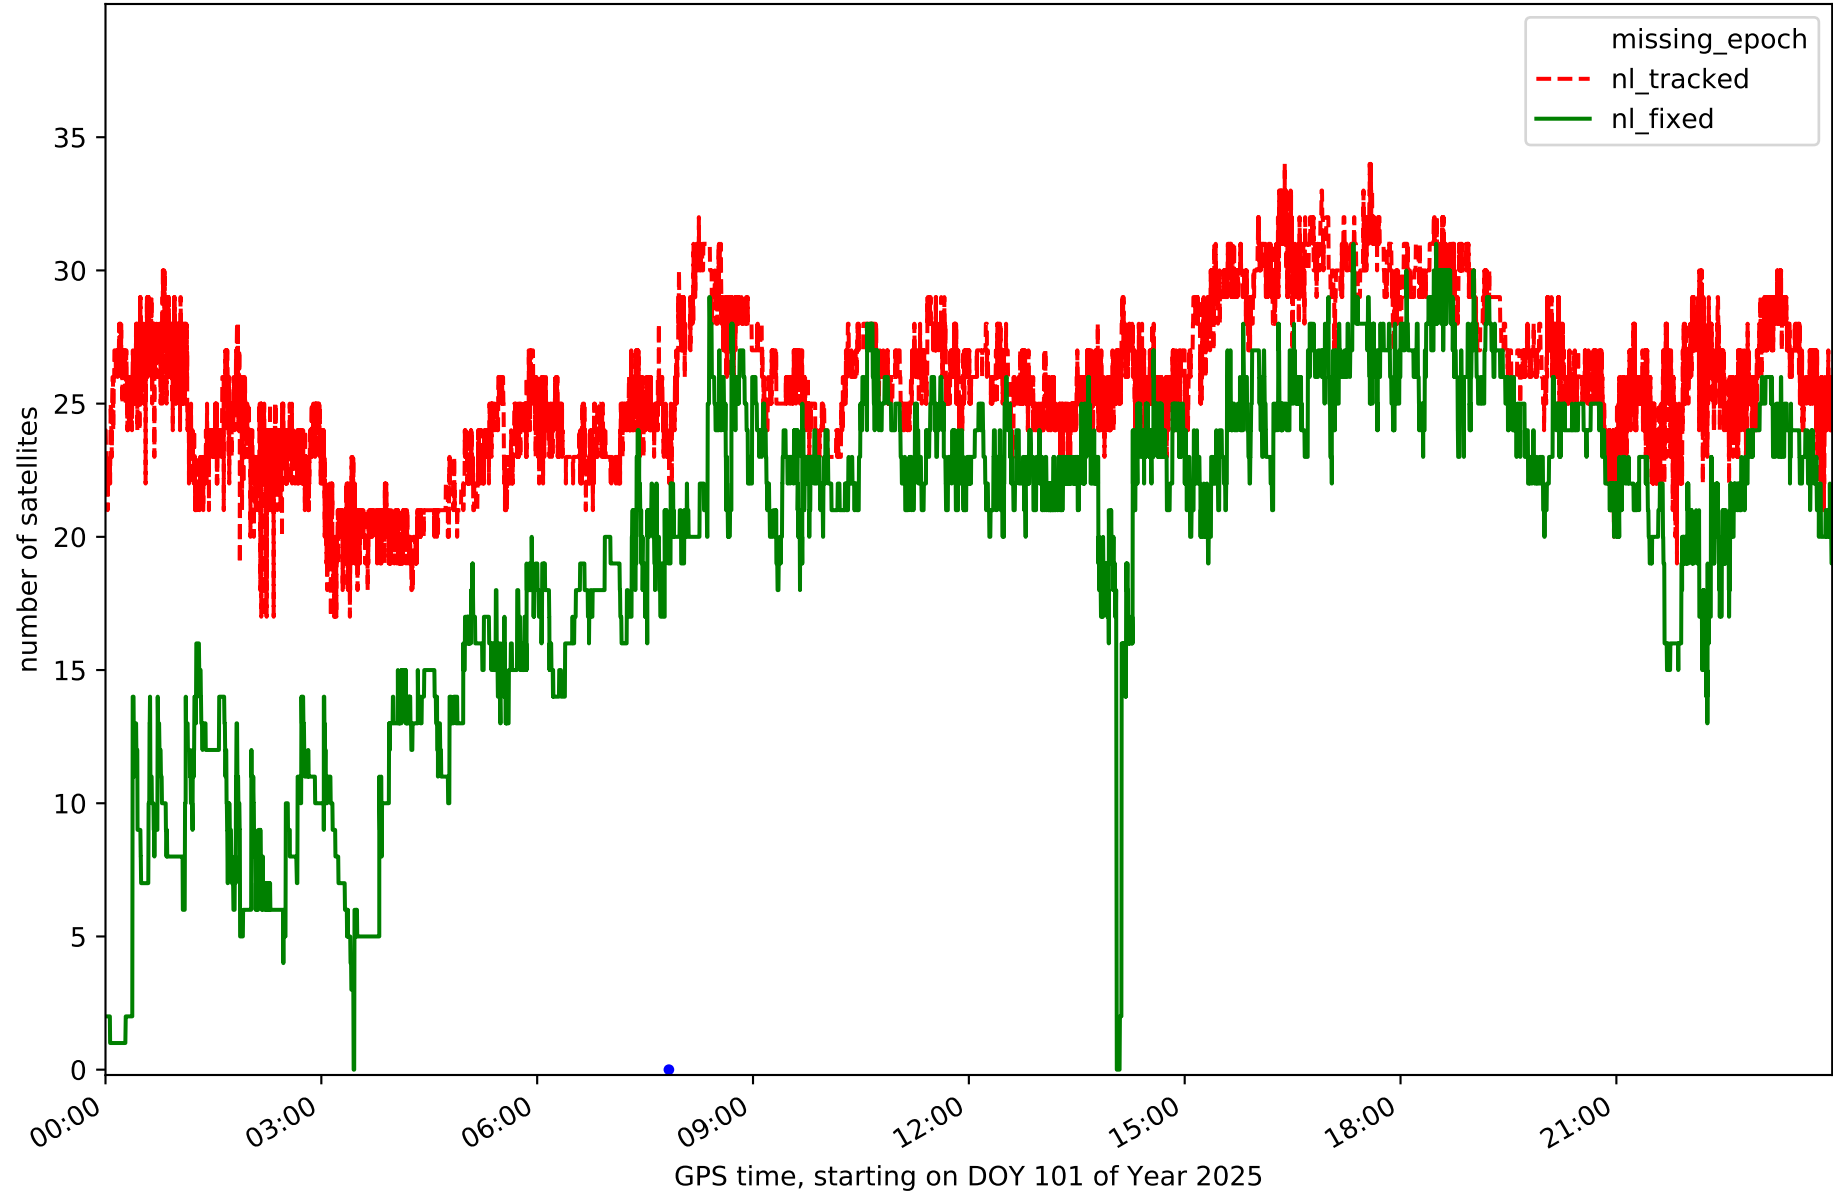


Station TN03 in network NT32

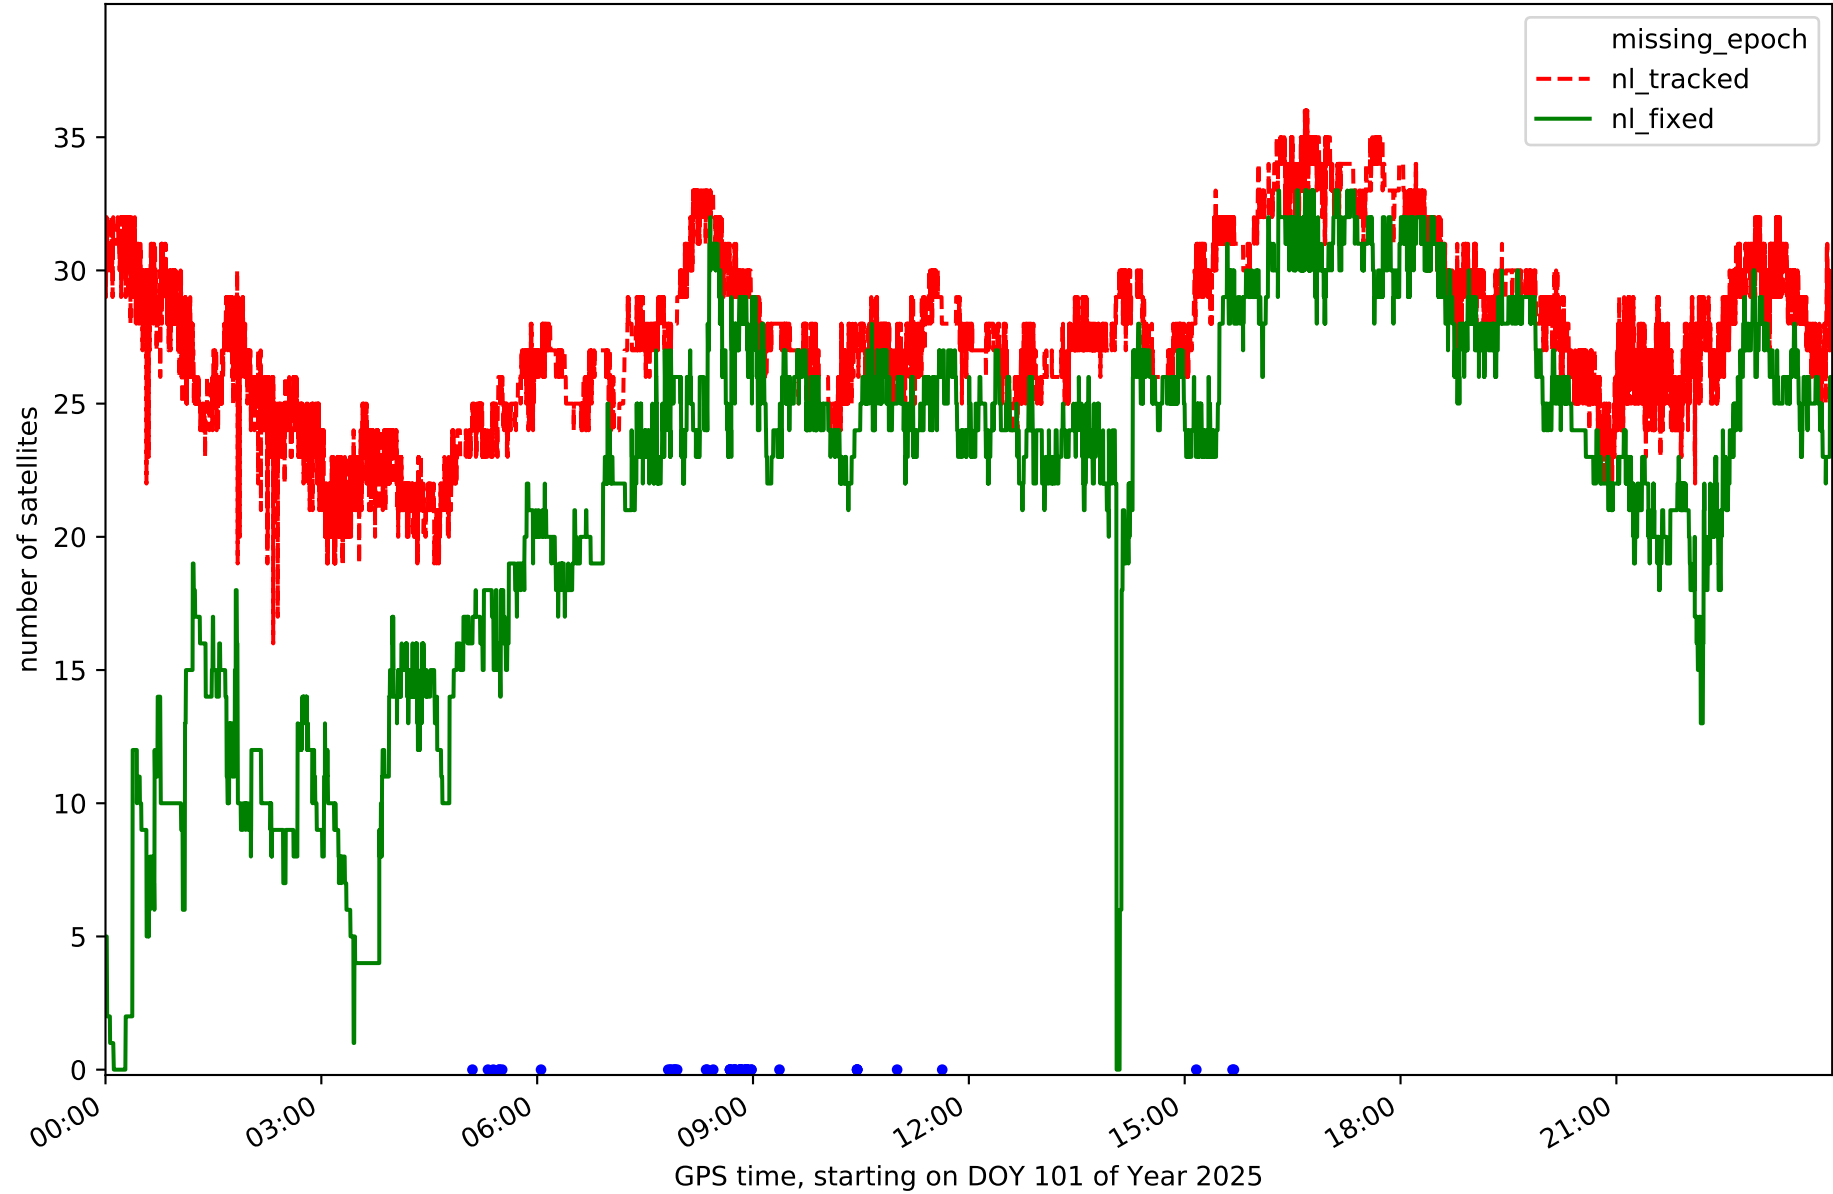


Station TN04 in network NT32

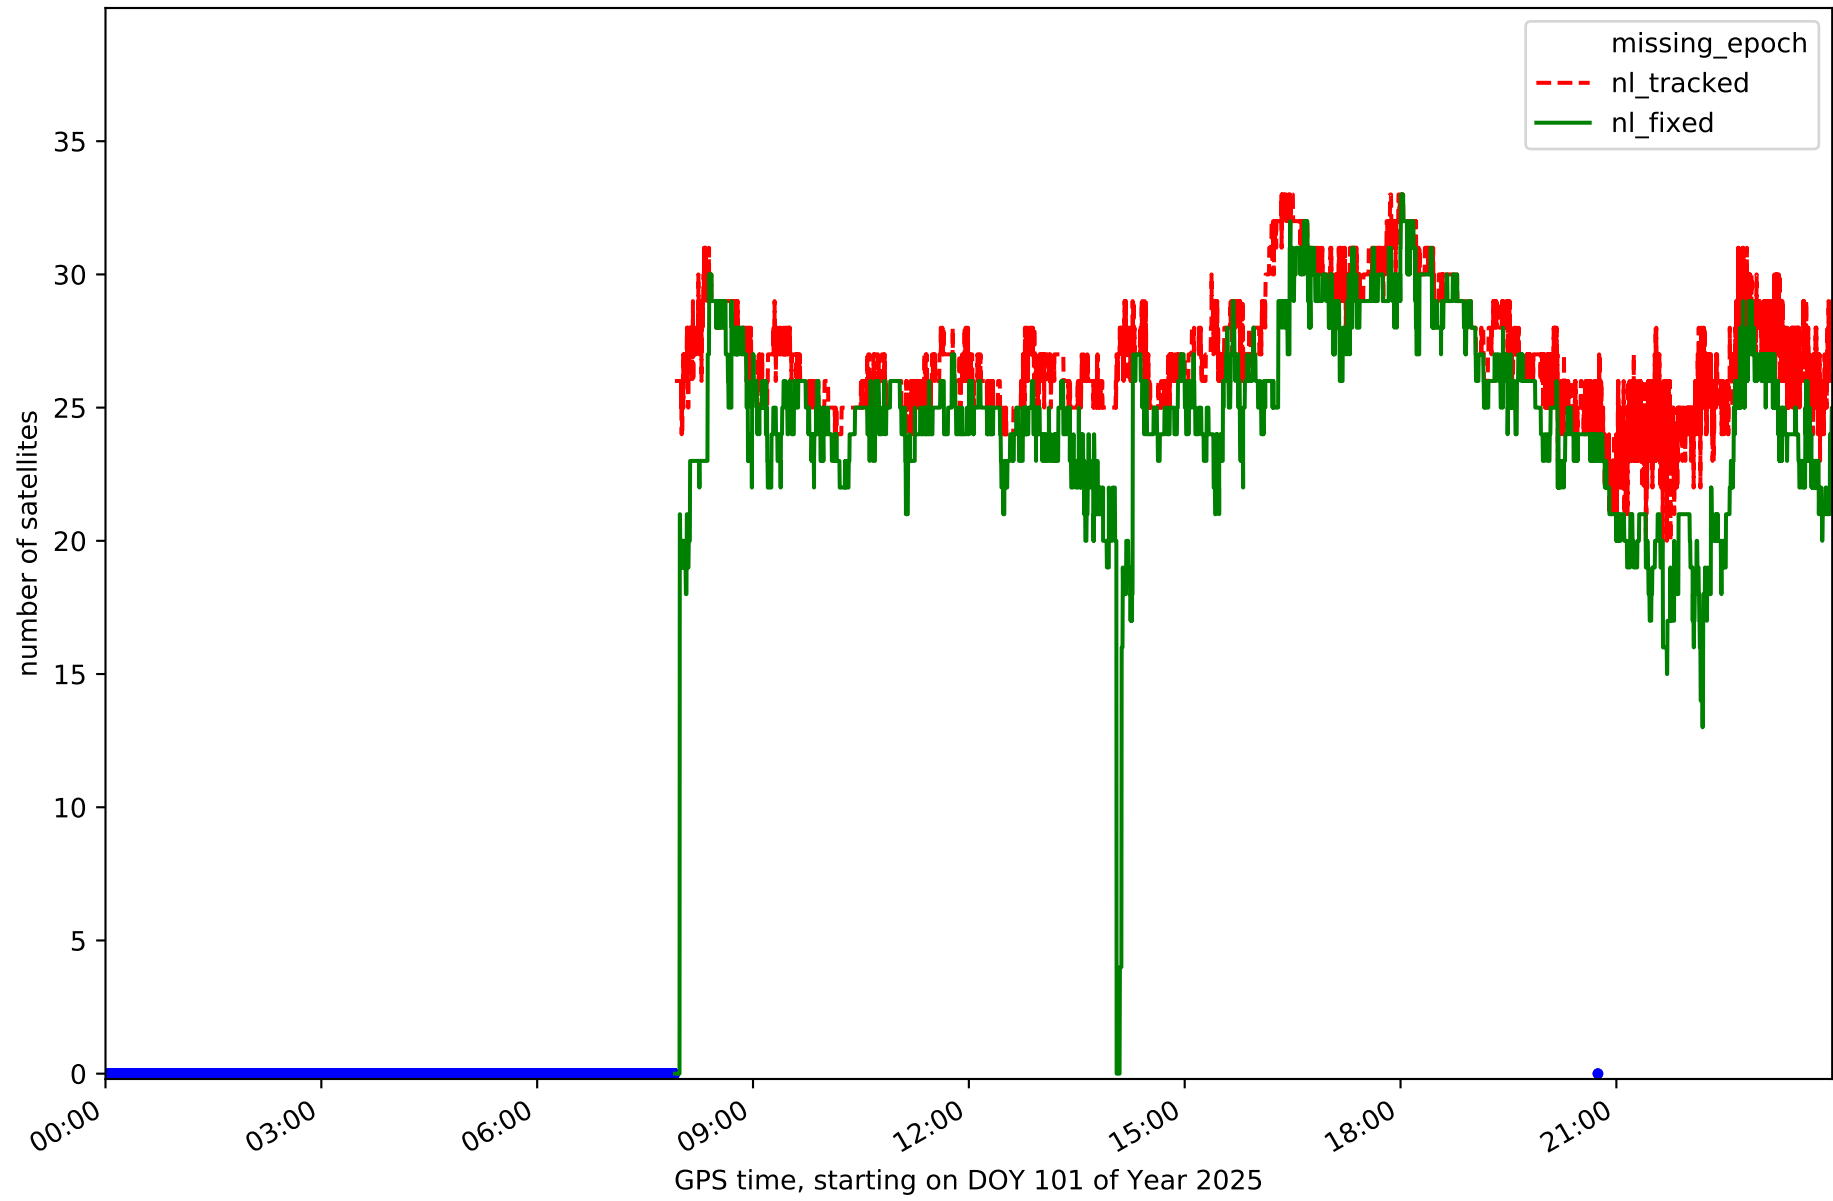


Station TN06 in network NT32

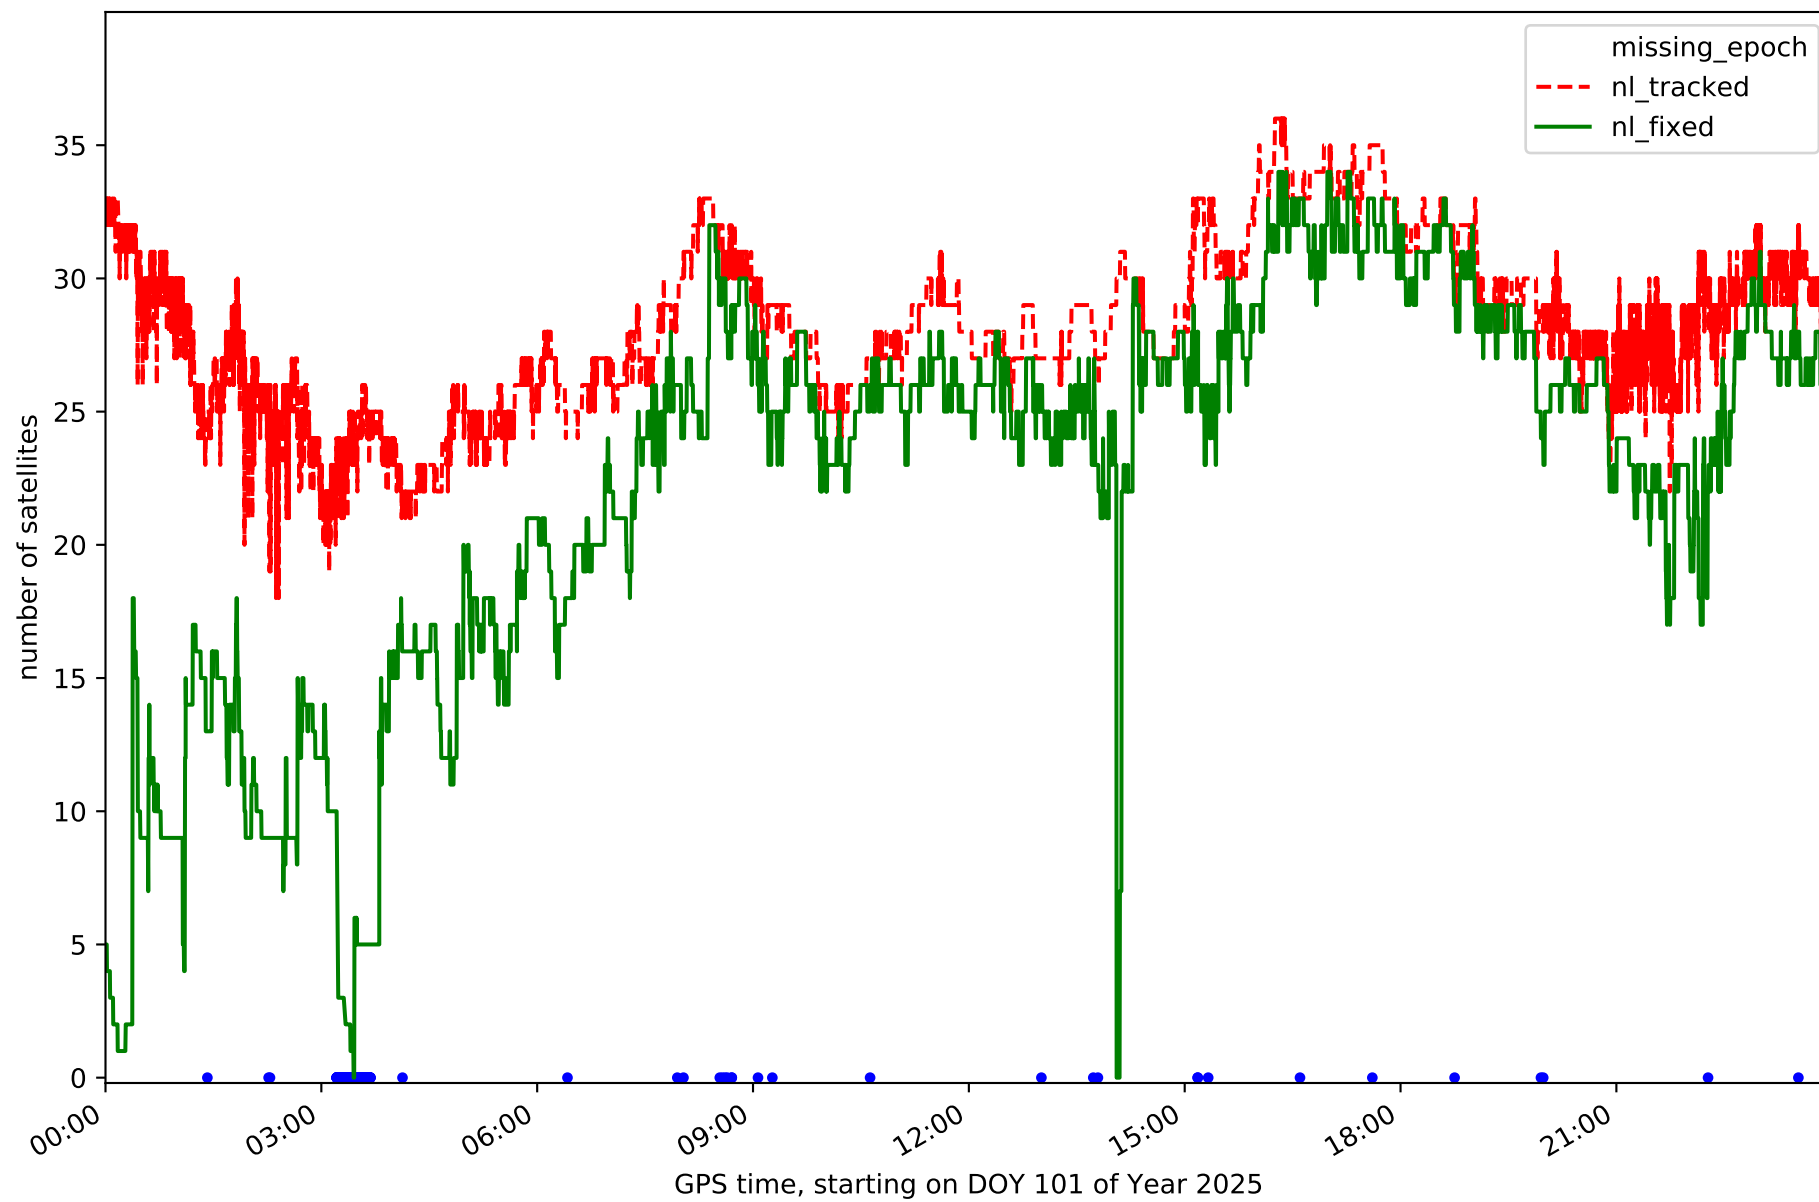


Station TN09 in network NT32

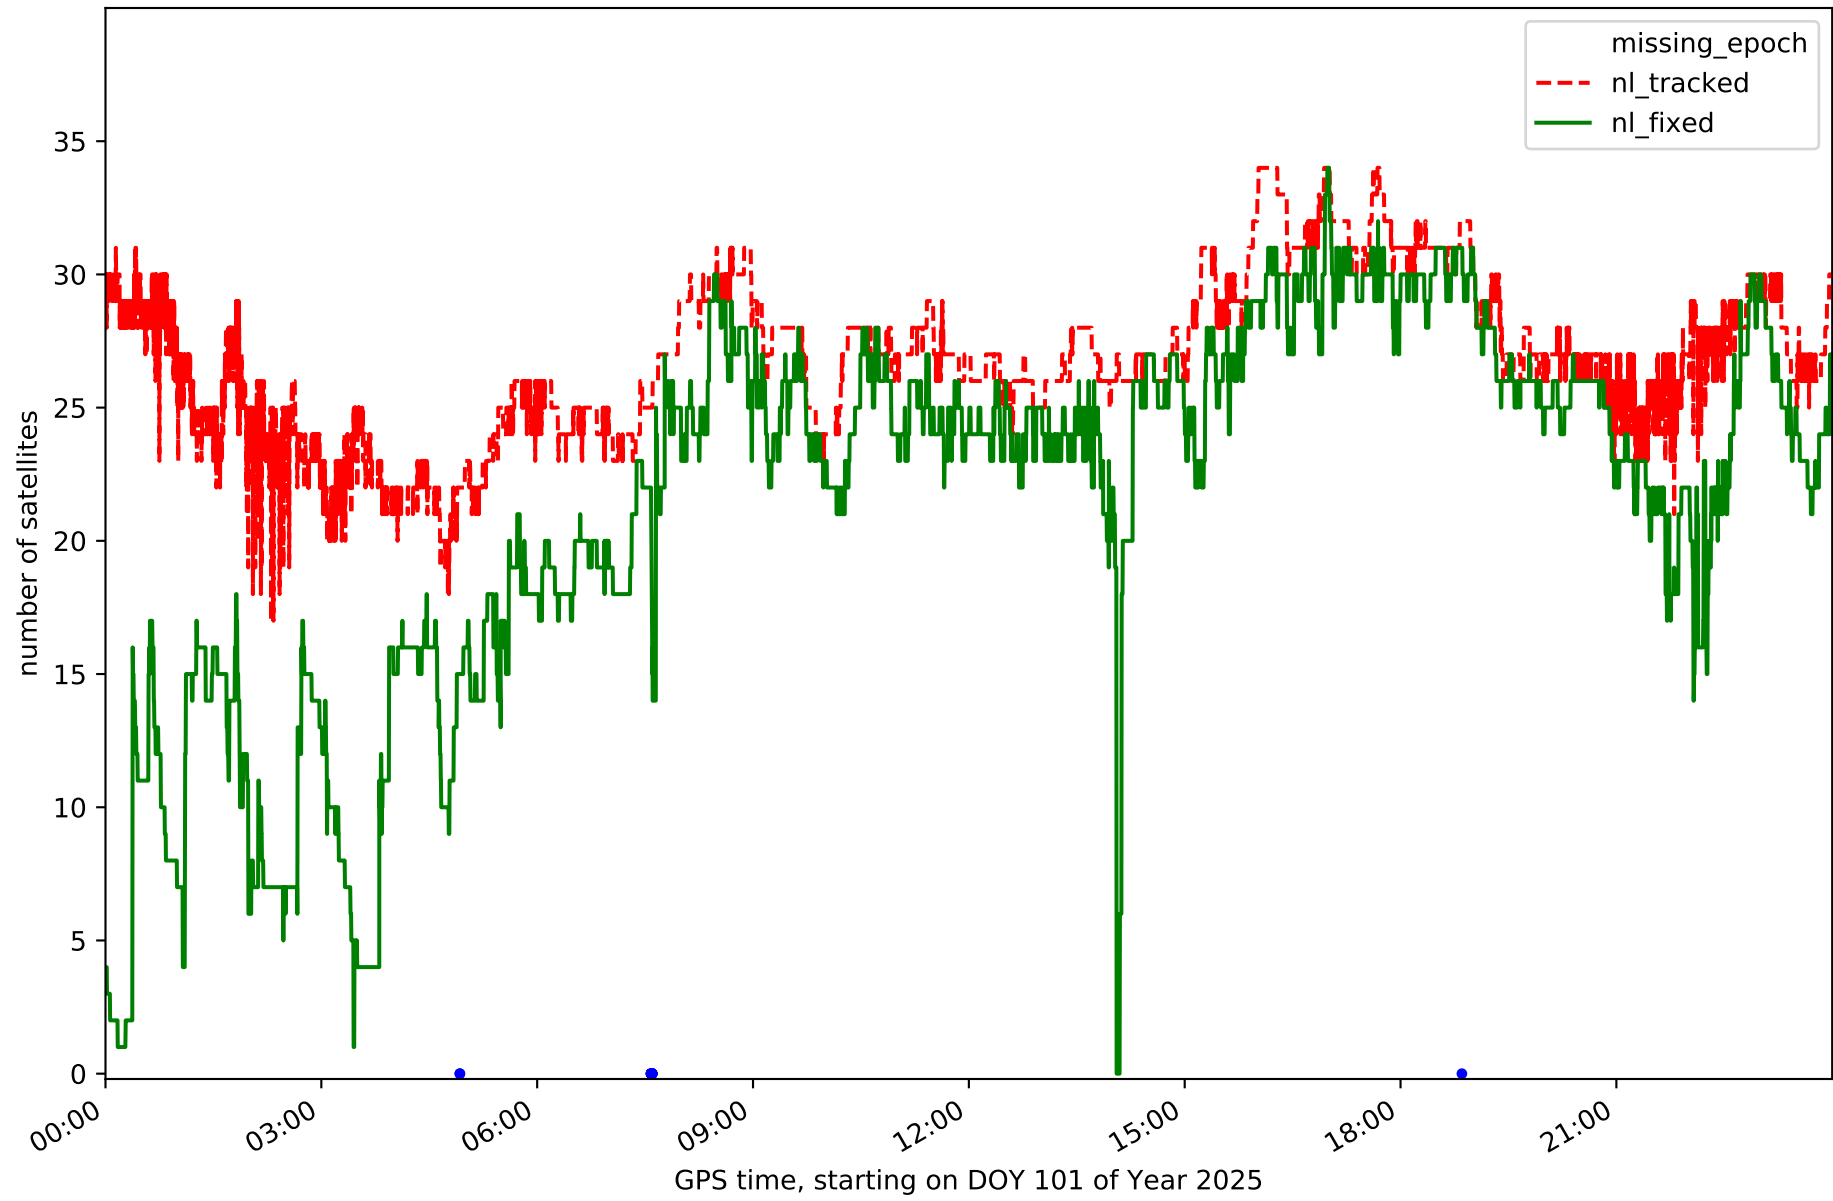


Station TE11 in network NT32

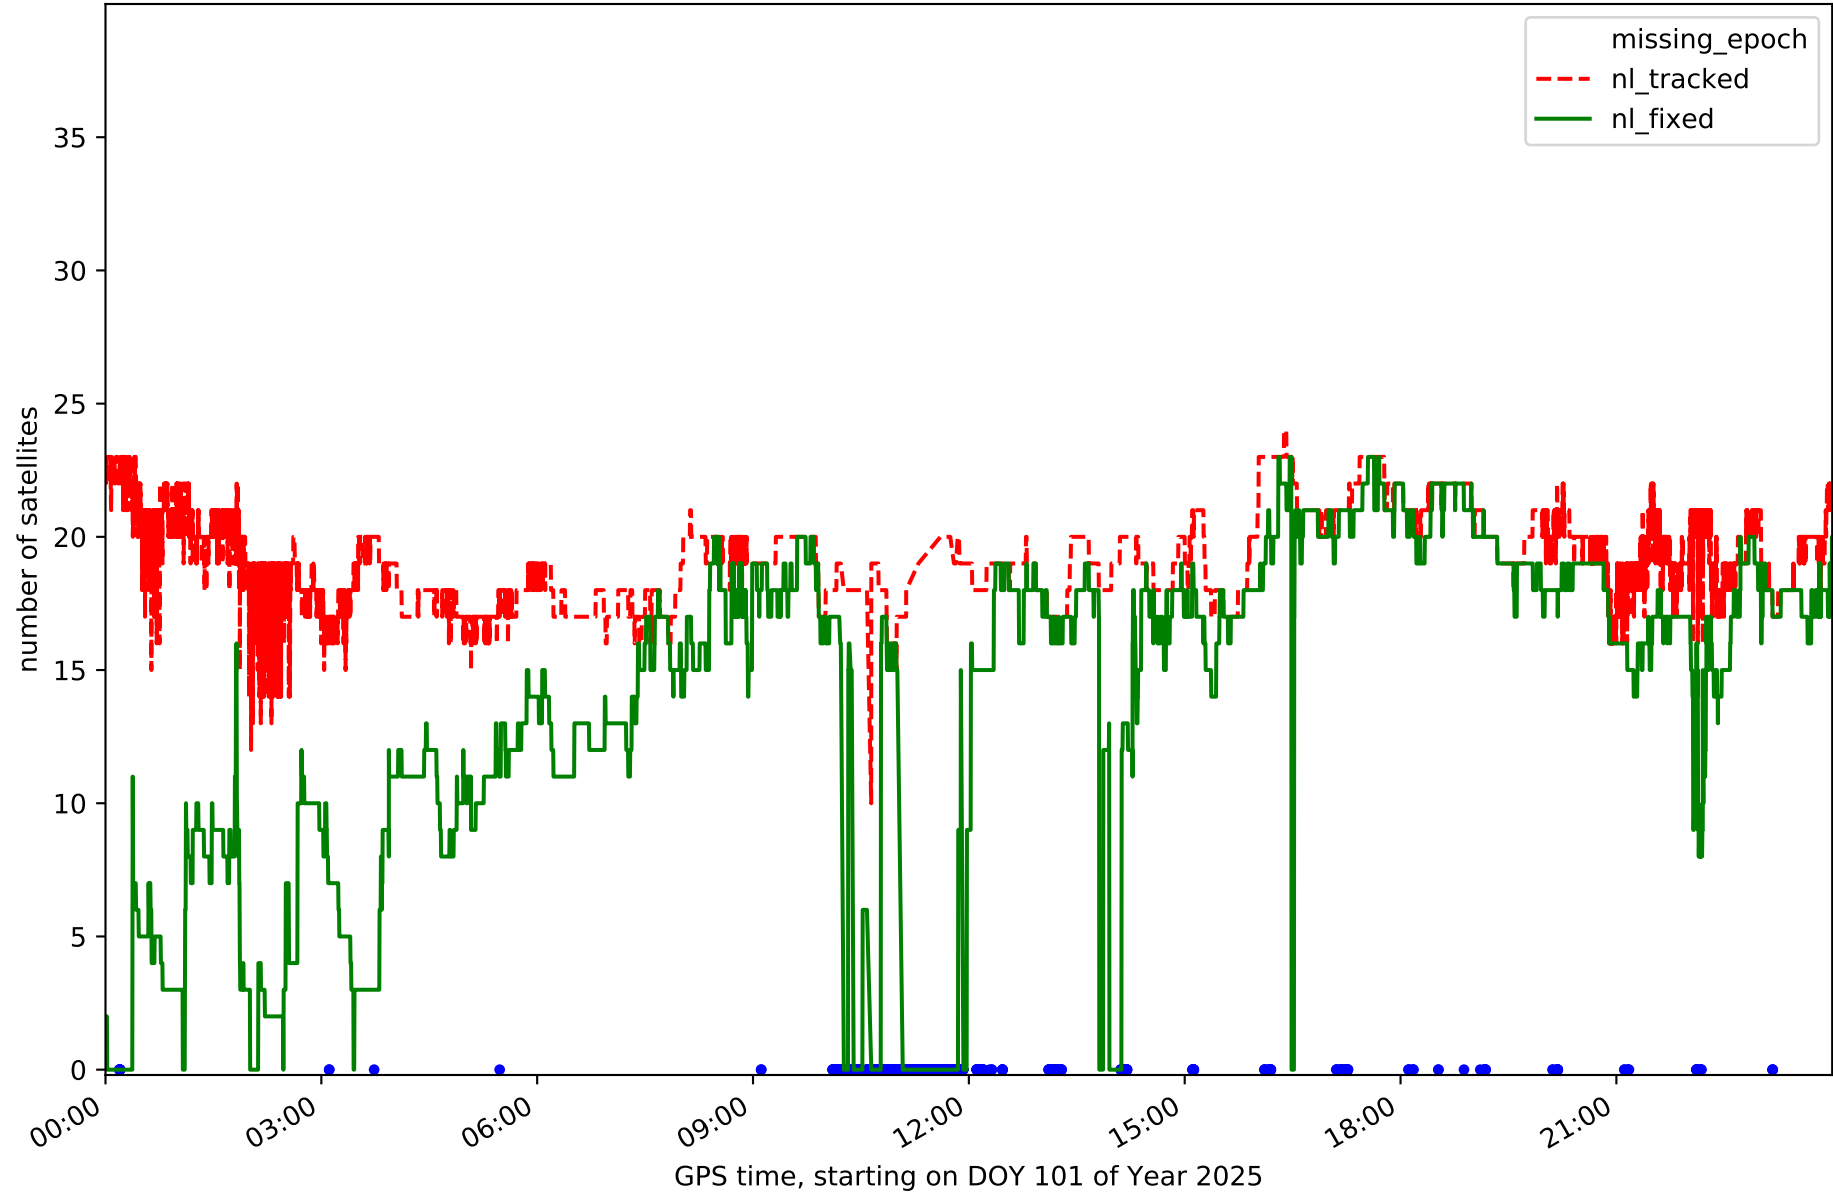


RefCheck for station EH01 in network NT32

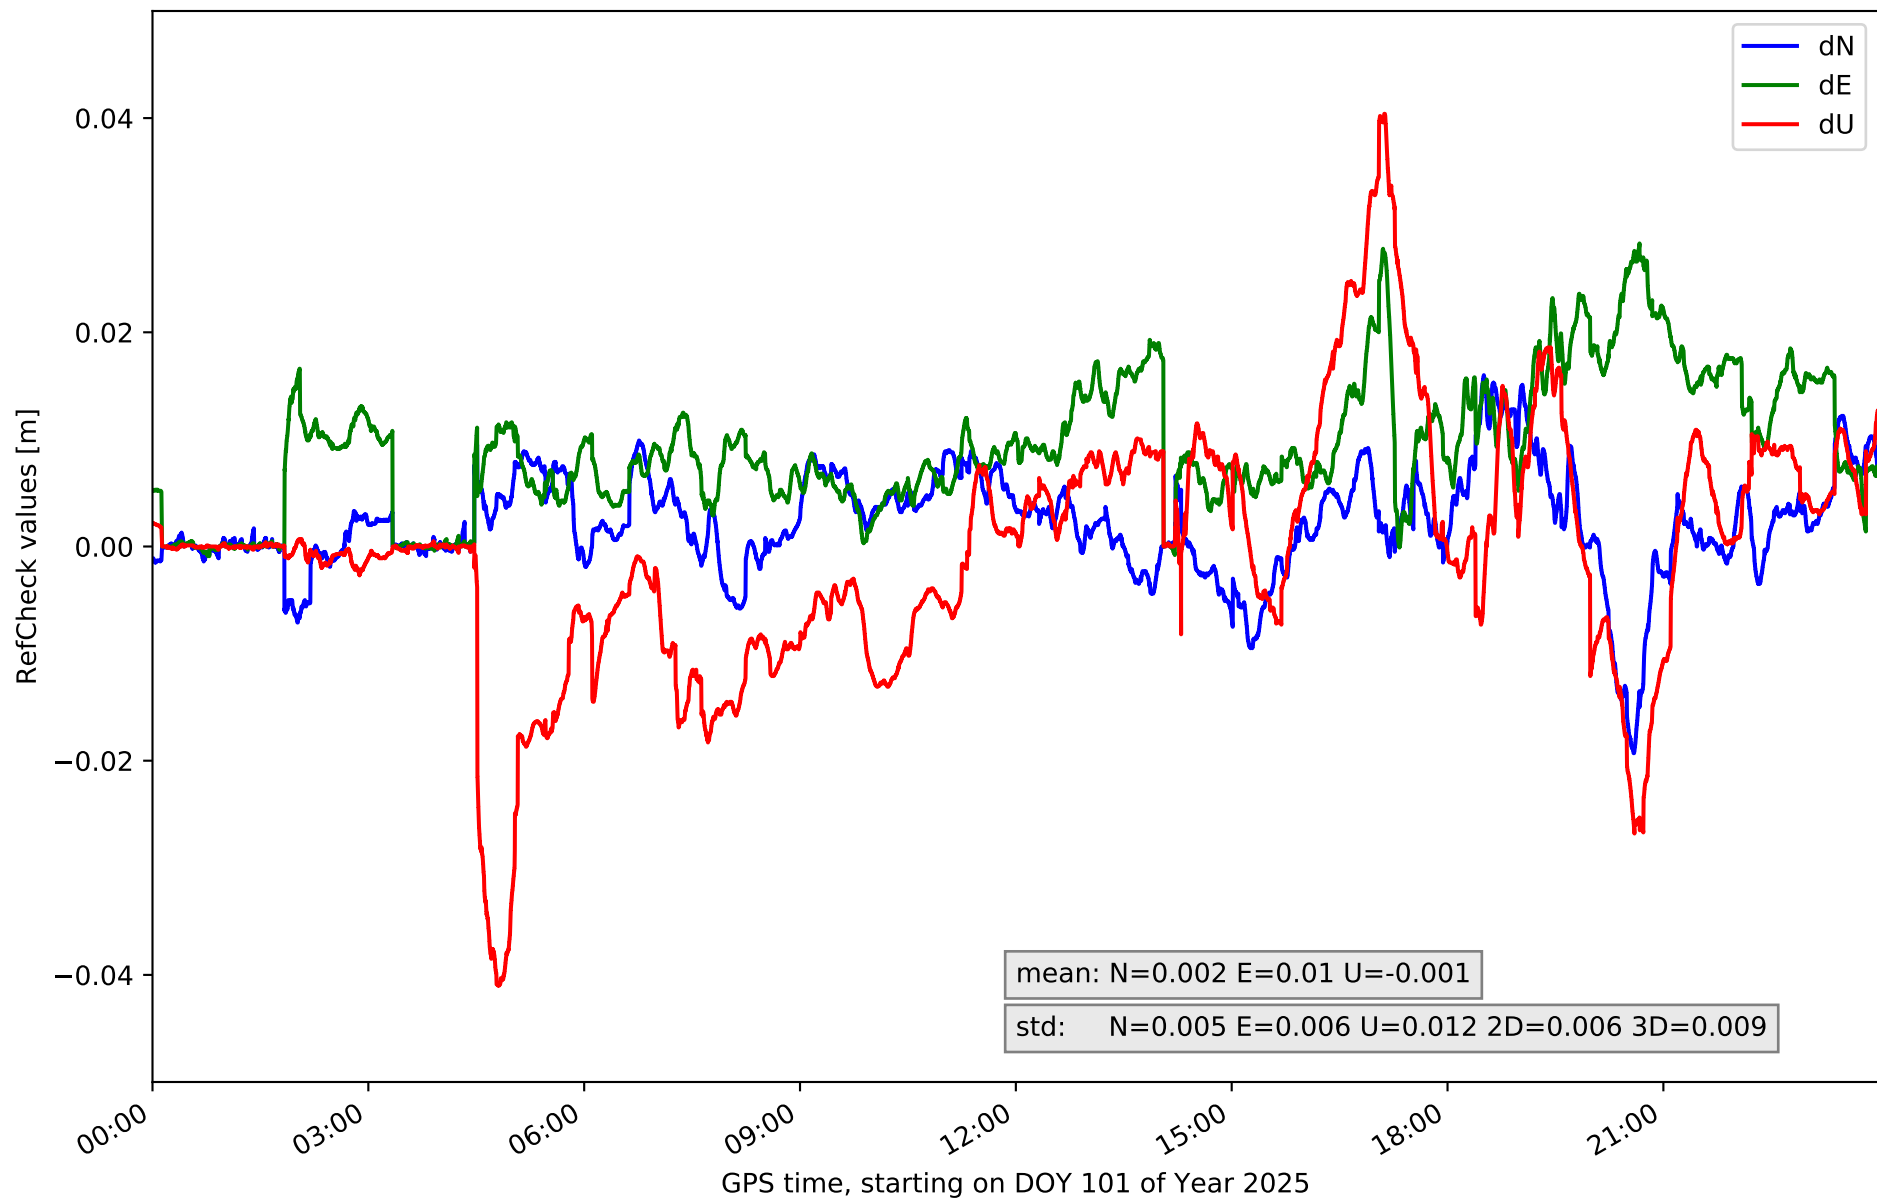


RefCheck for station EH02 in network NT32

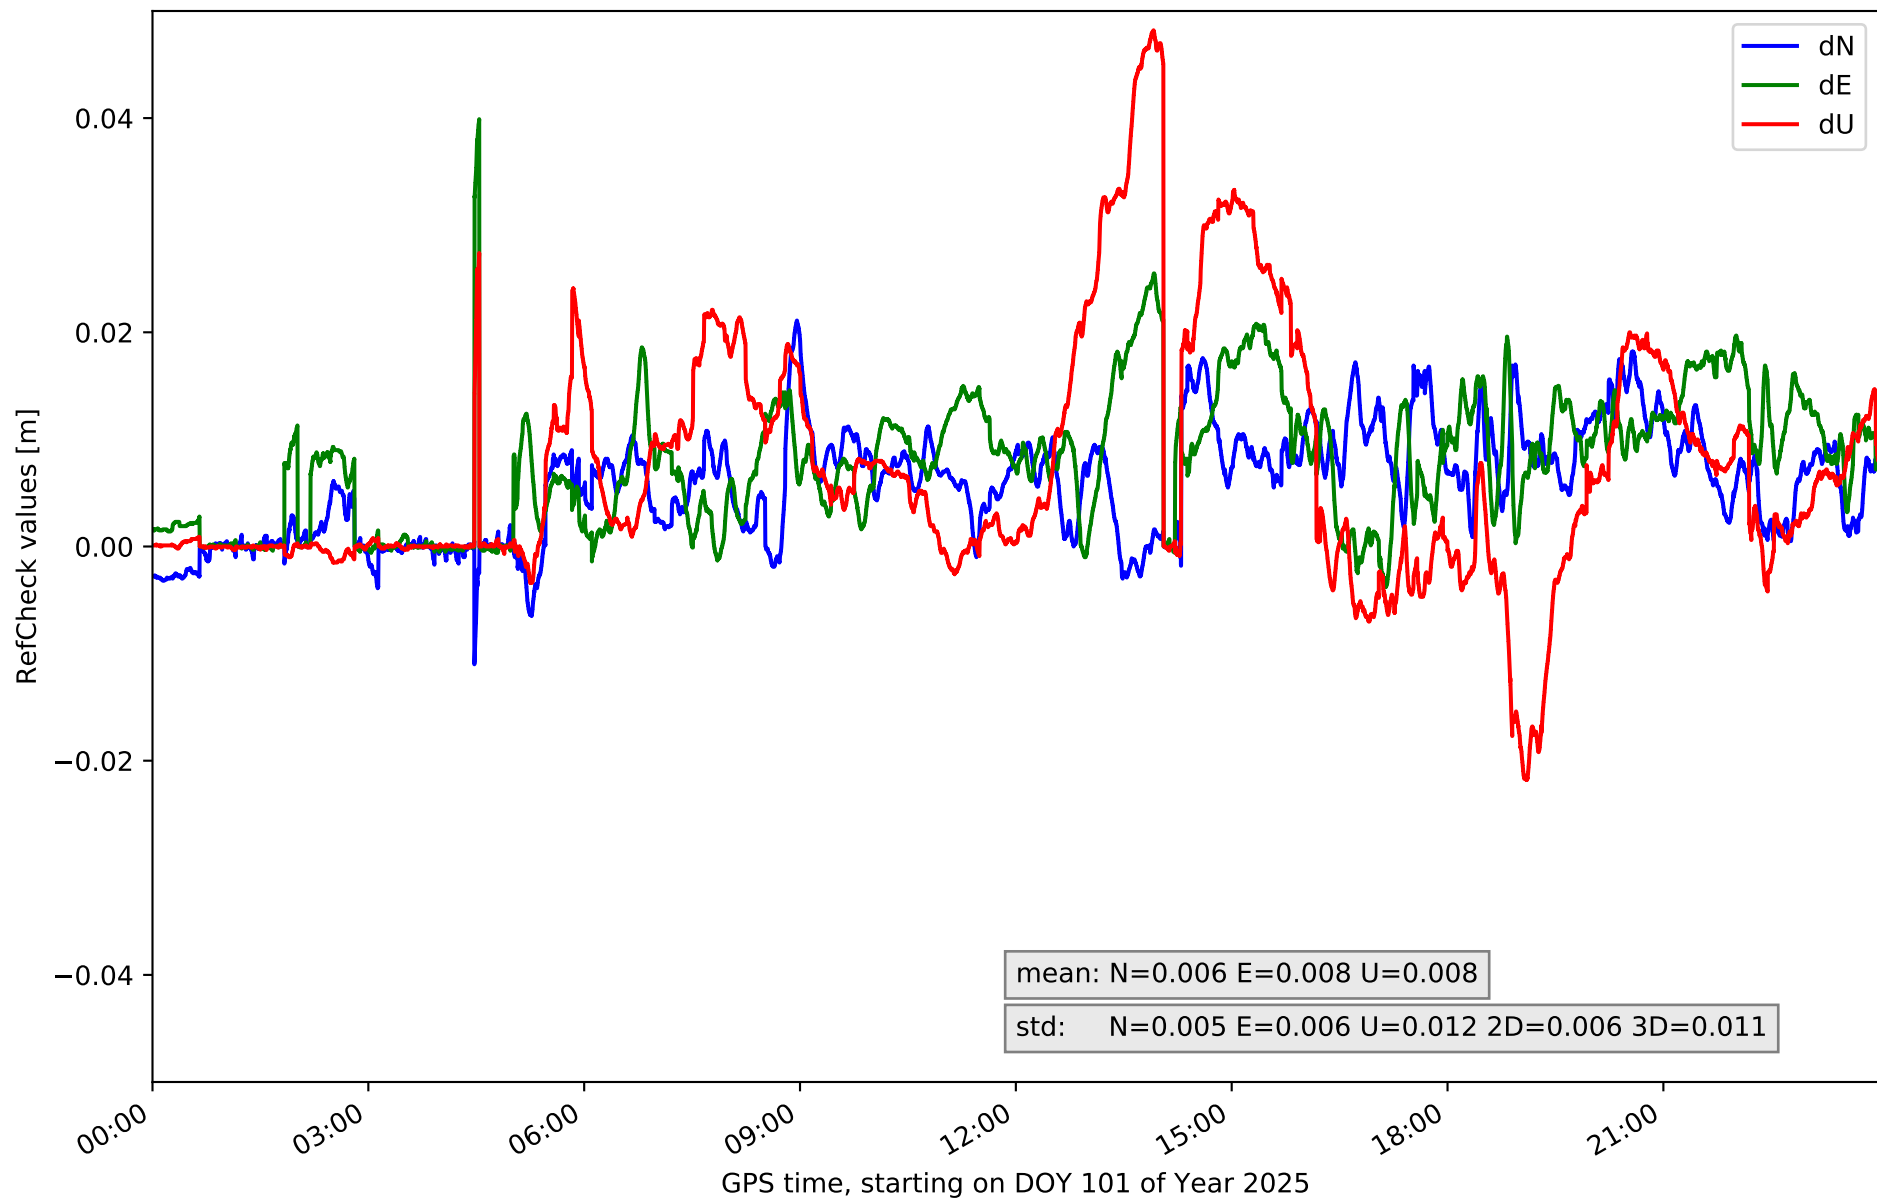


RefCheck for station GOM1 in network NT32

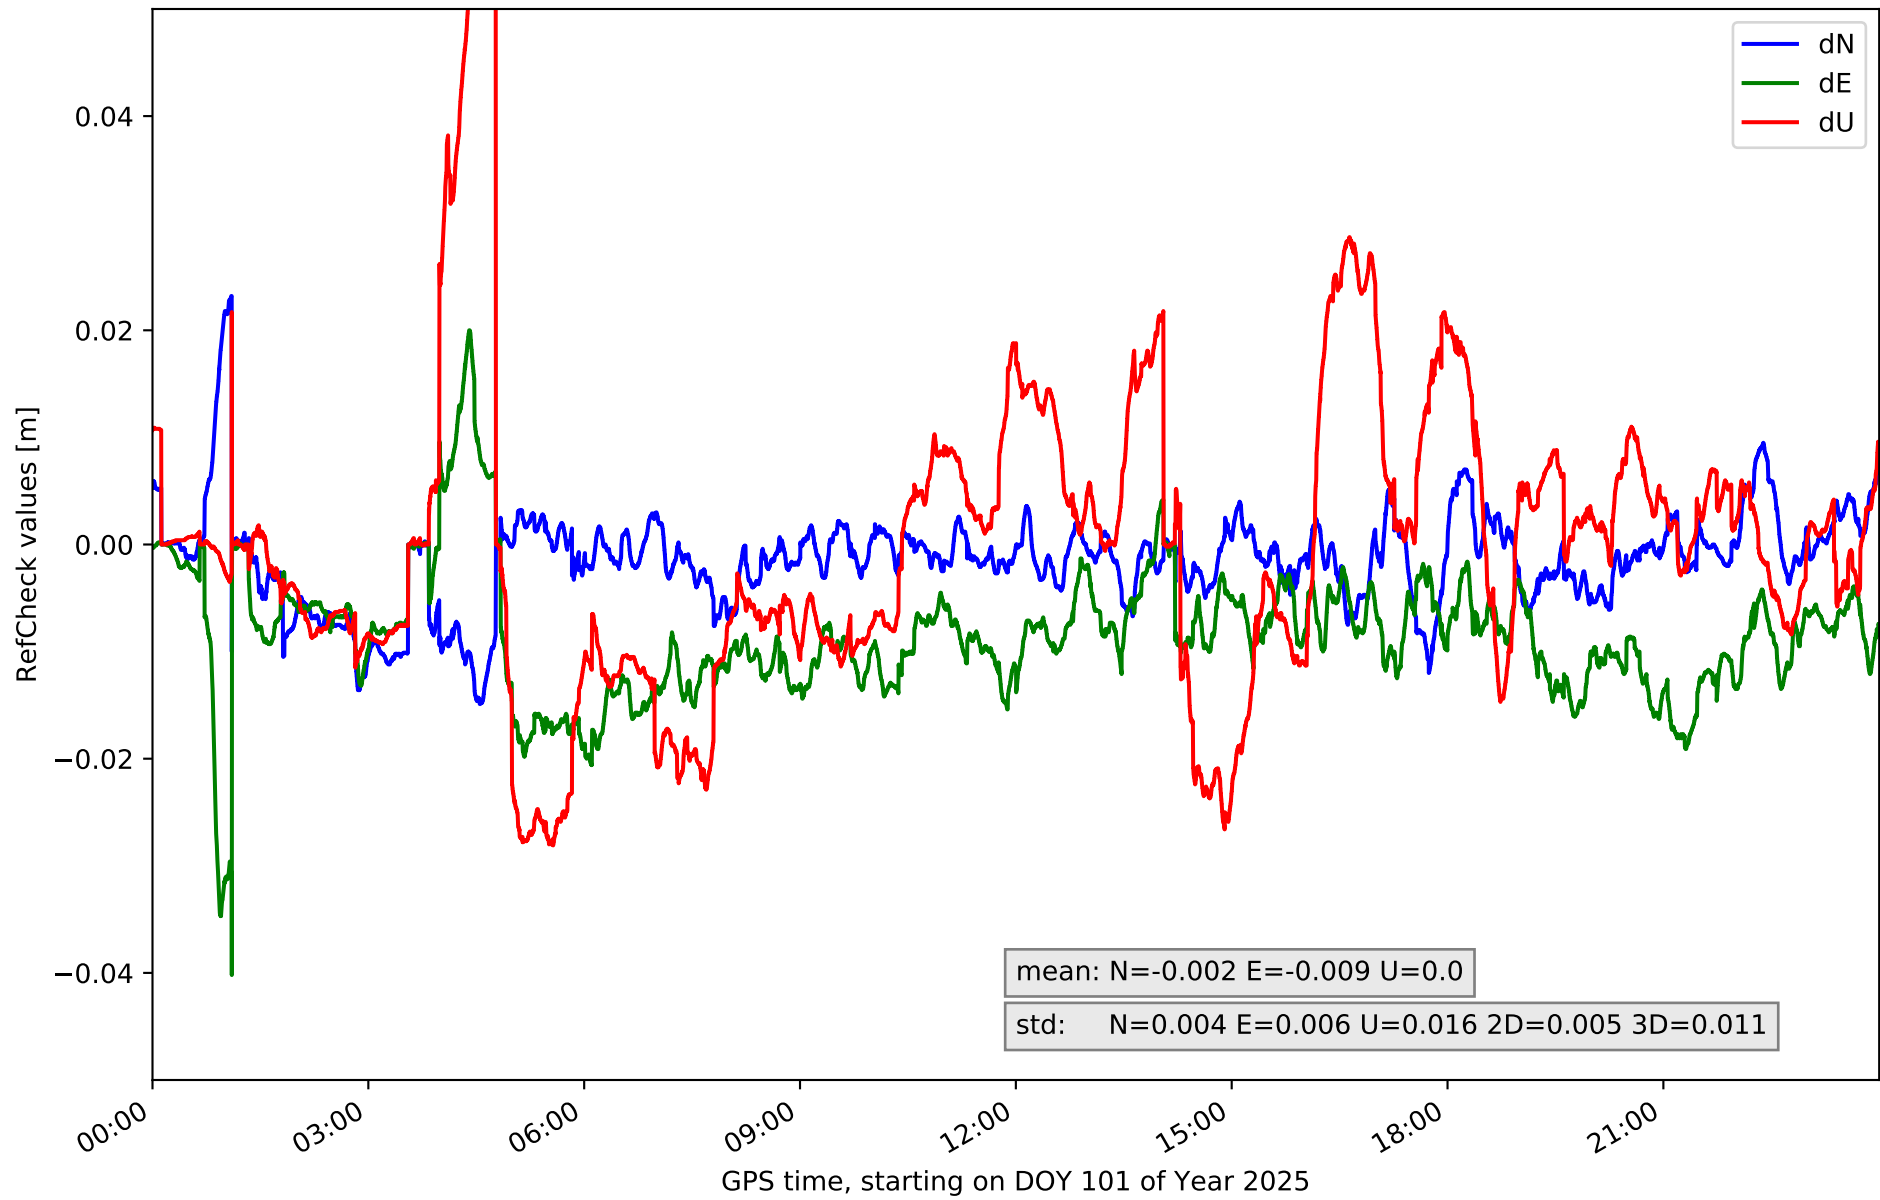


RefCheck for station IZAN in network NT32

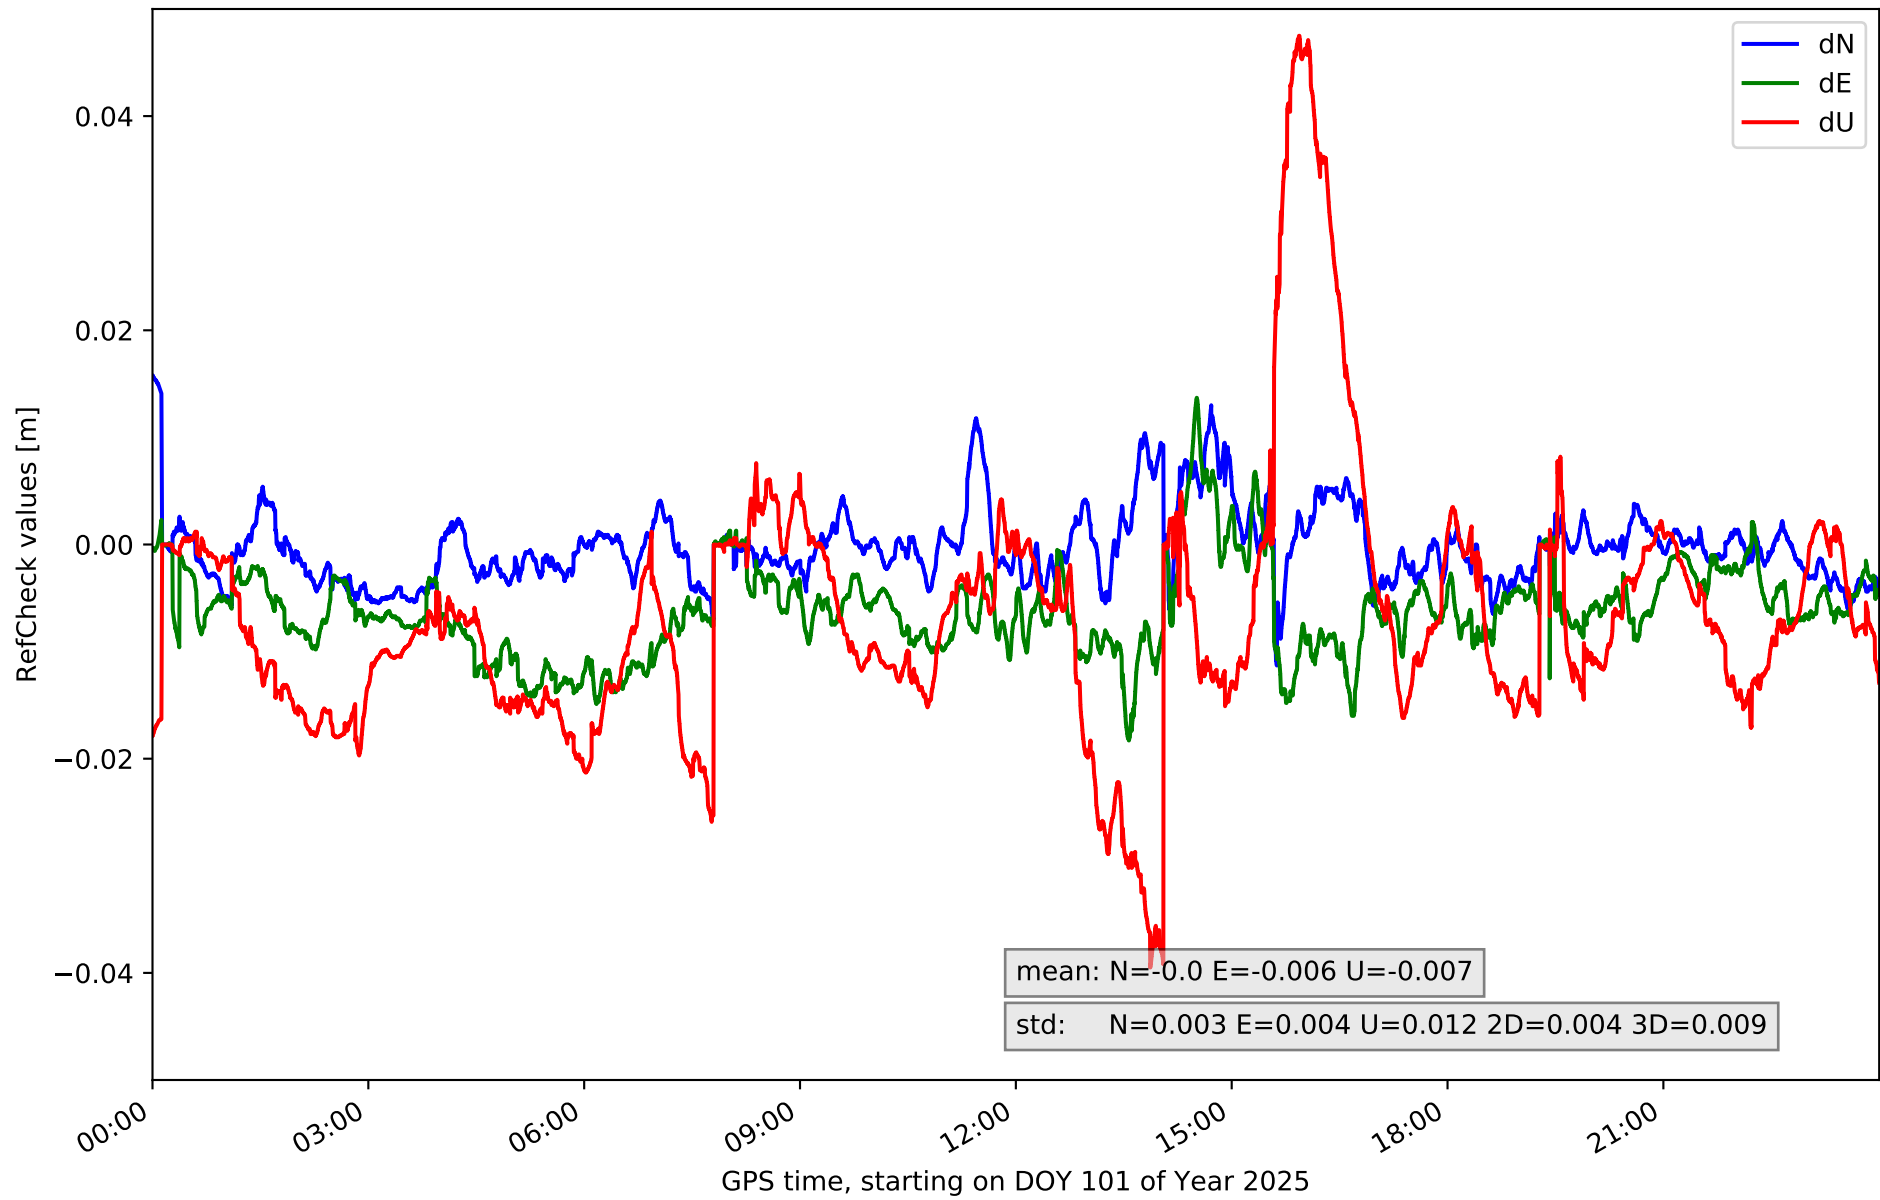


RefCheck for station LP01 in network NT32

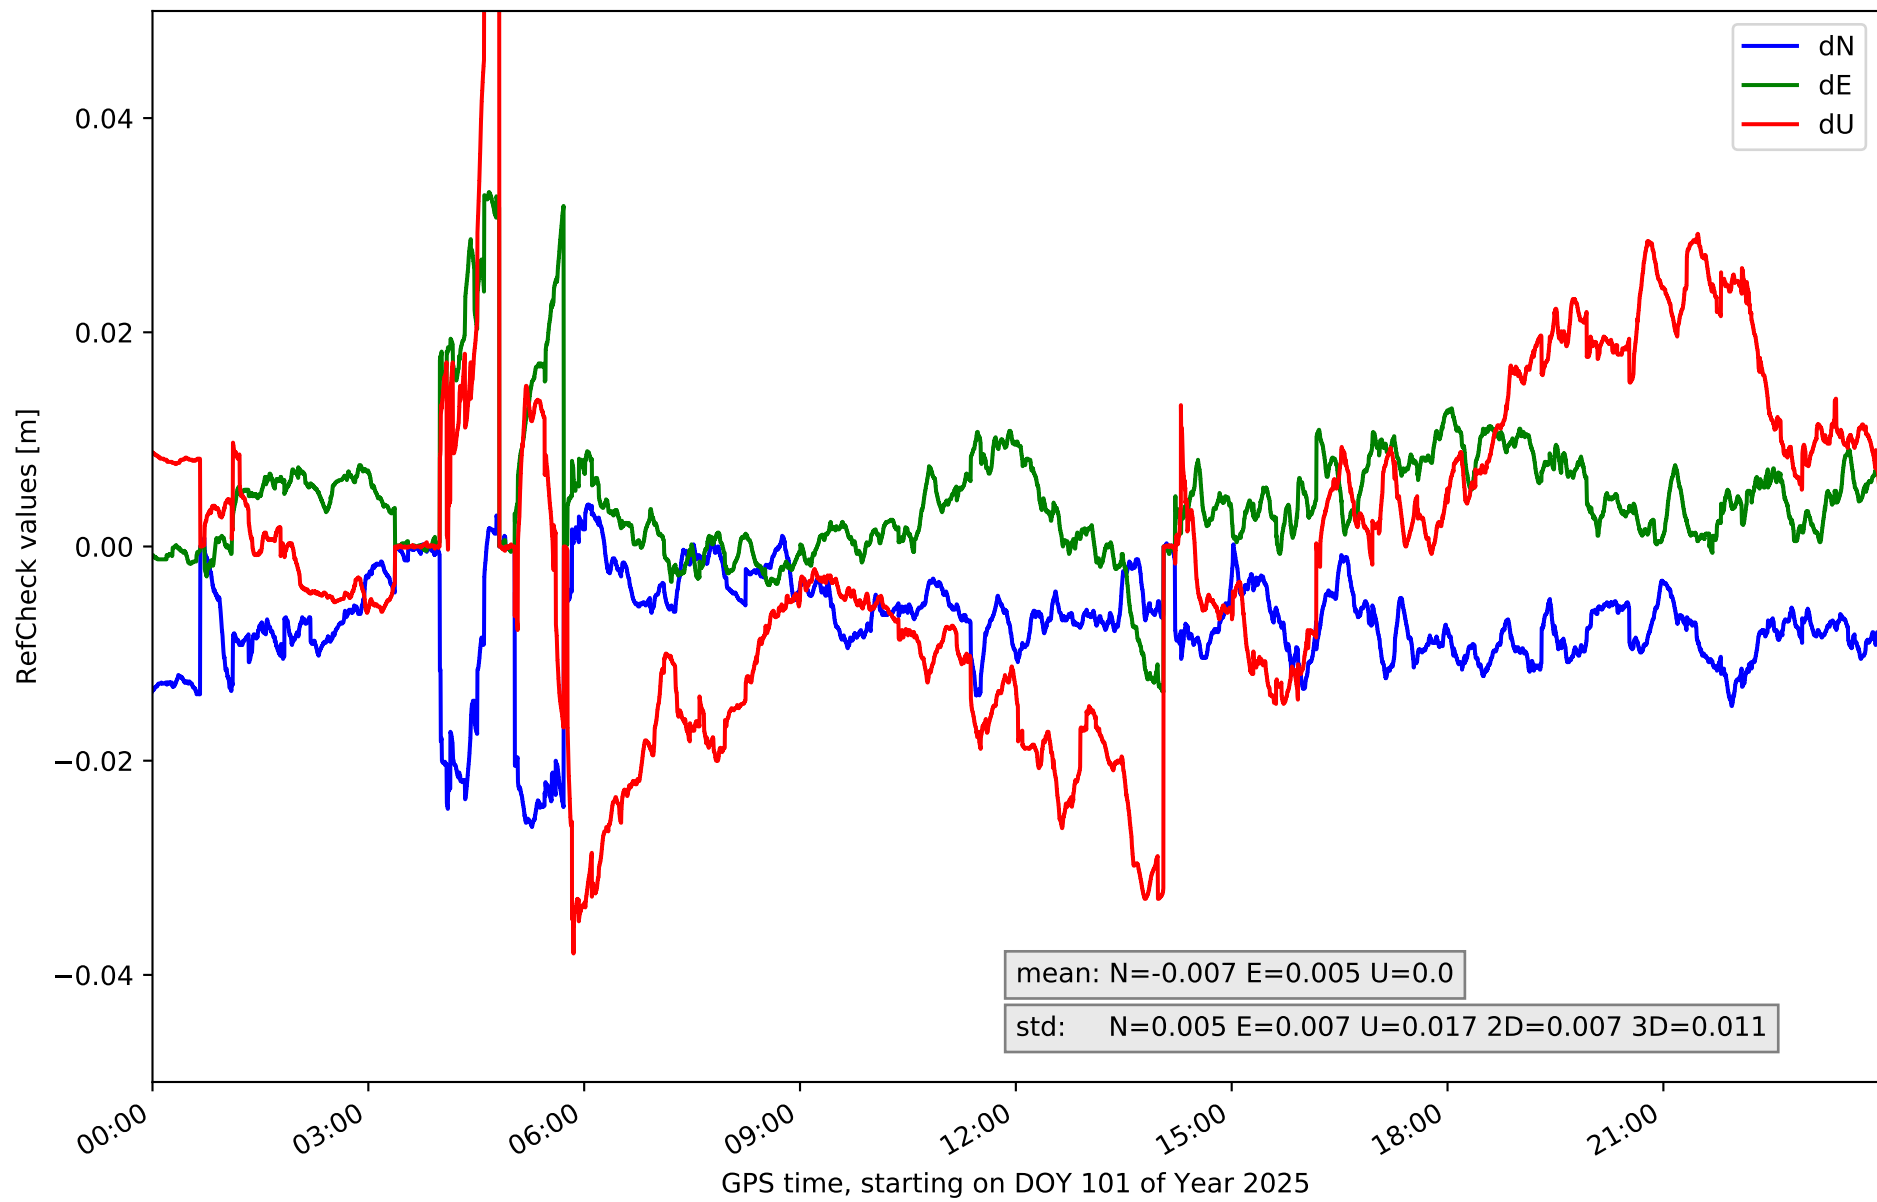


RefCheck for station LP03 in network NT32

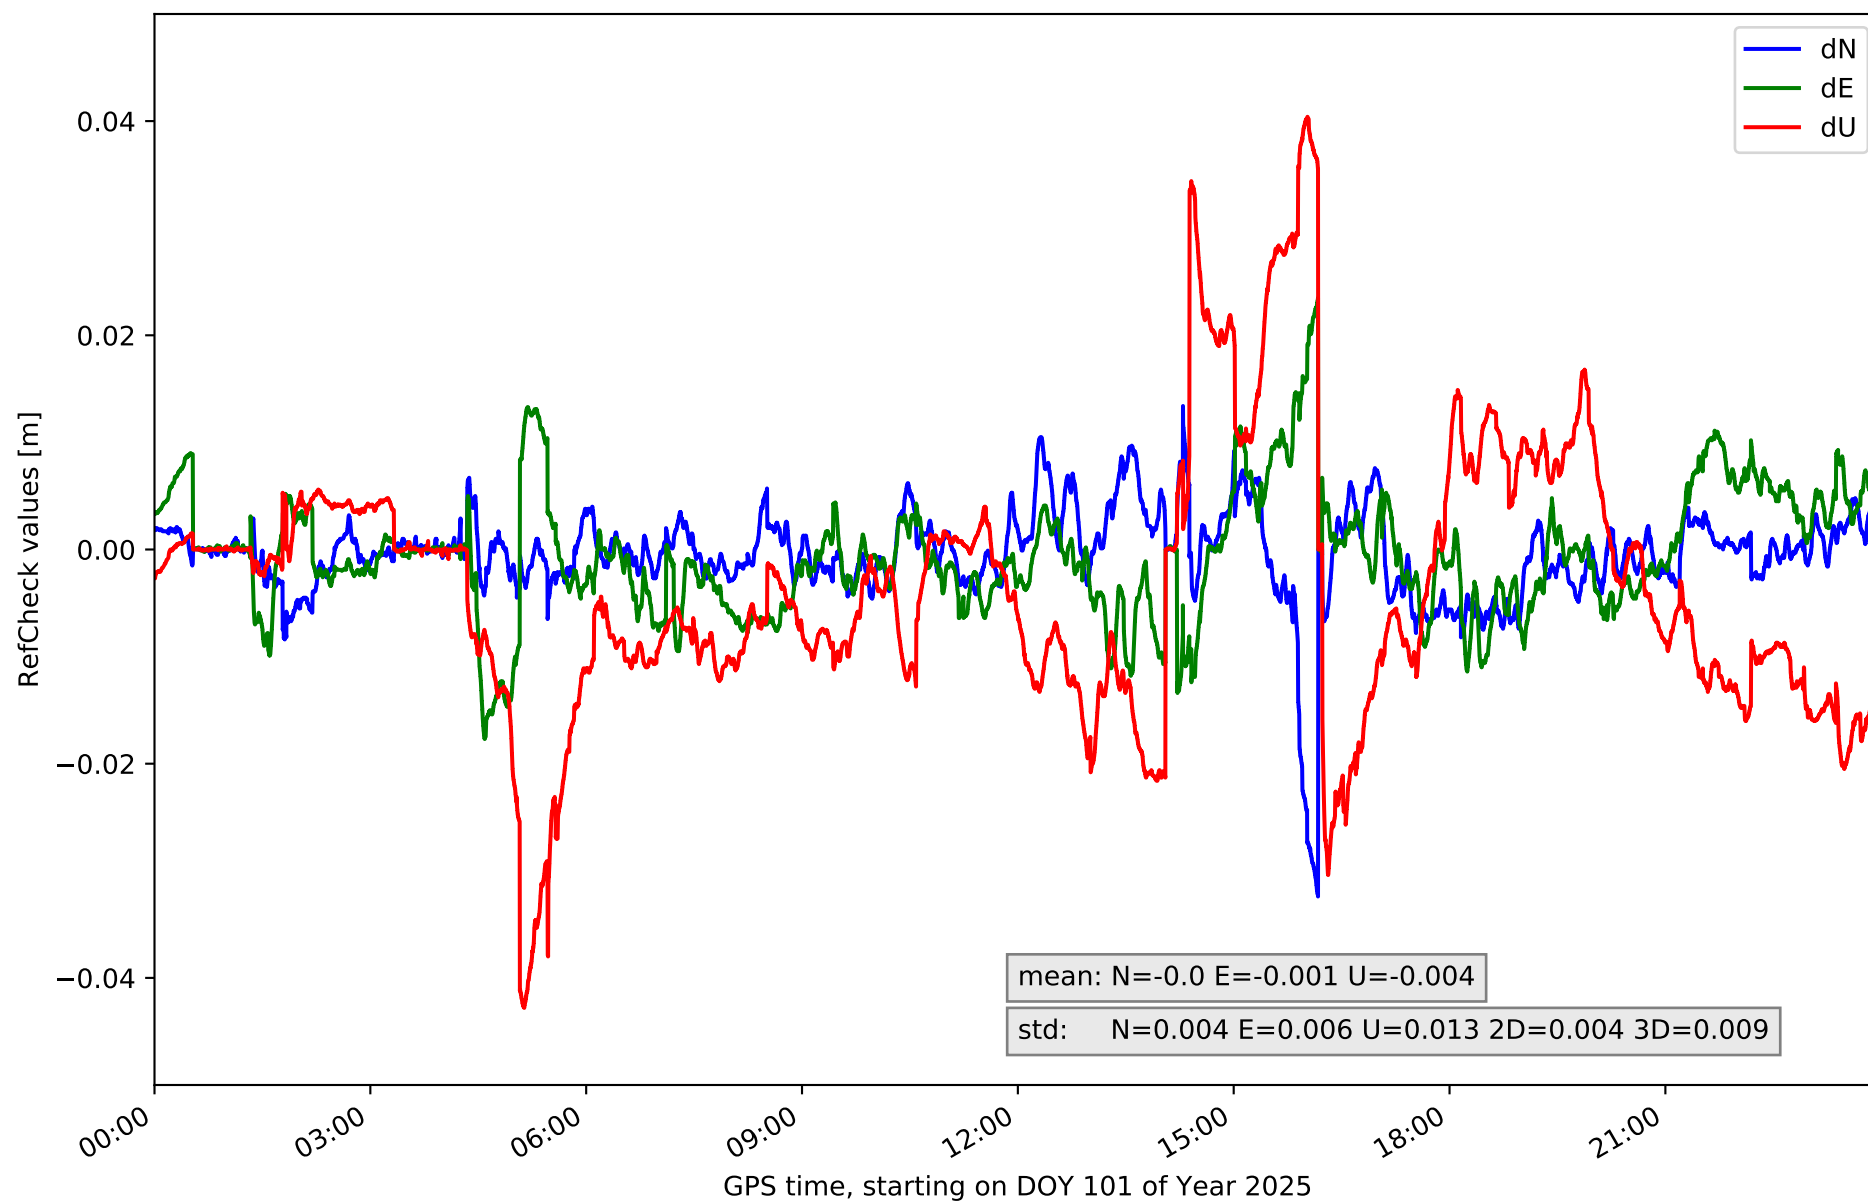


RefCheck for station LPAL in network NT32

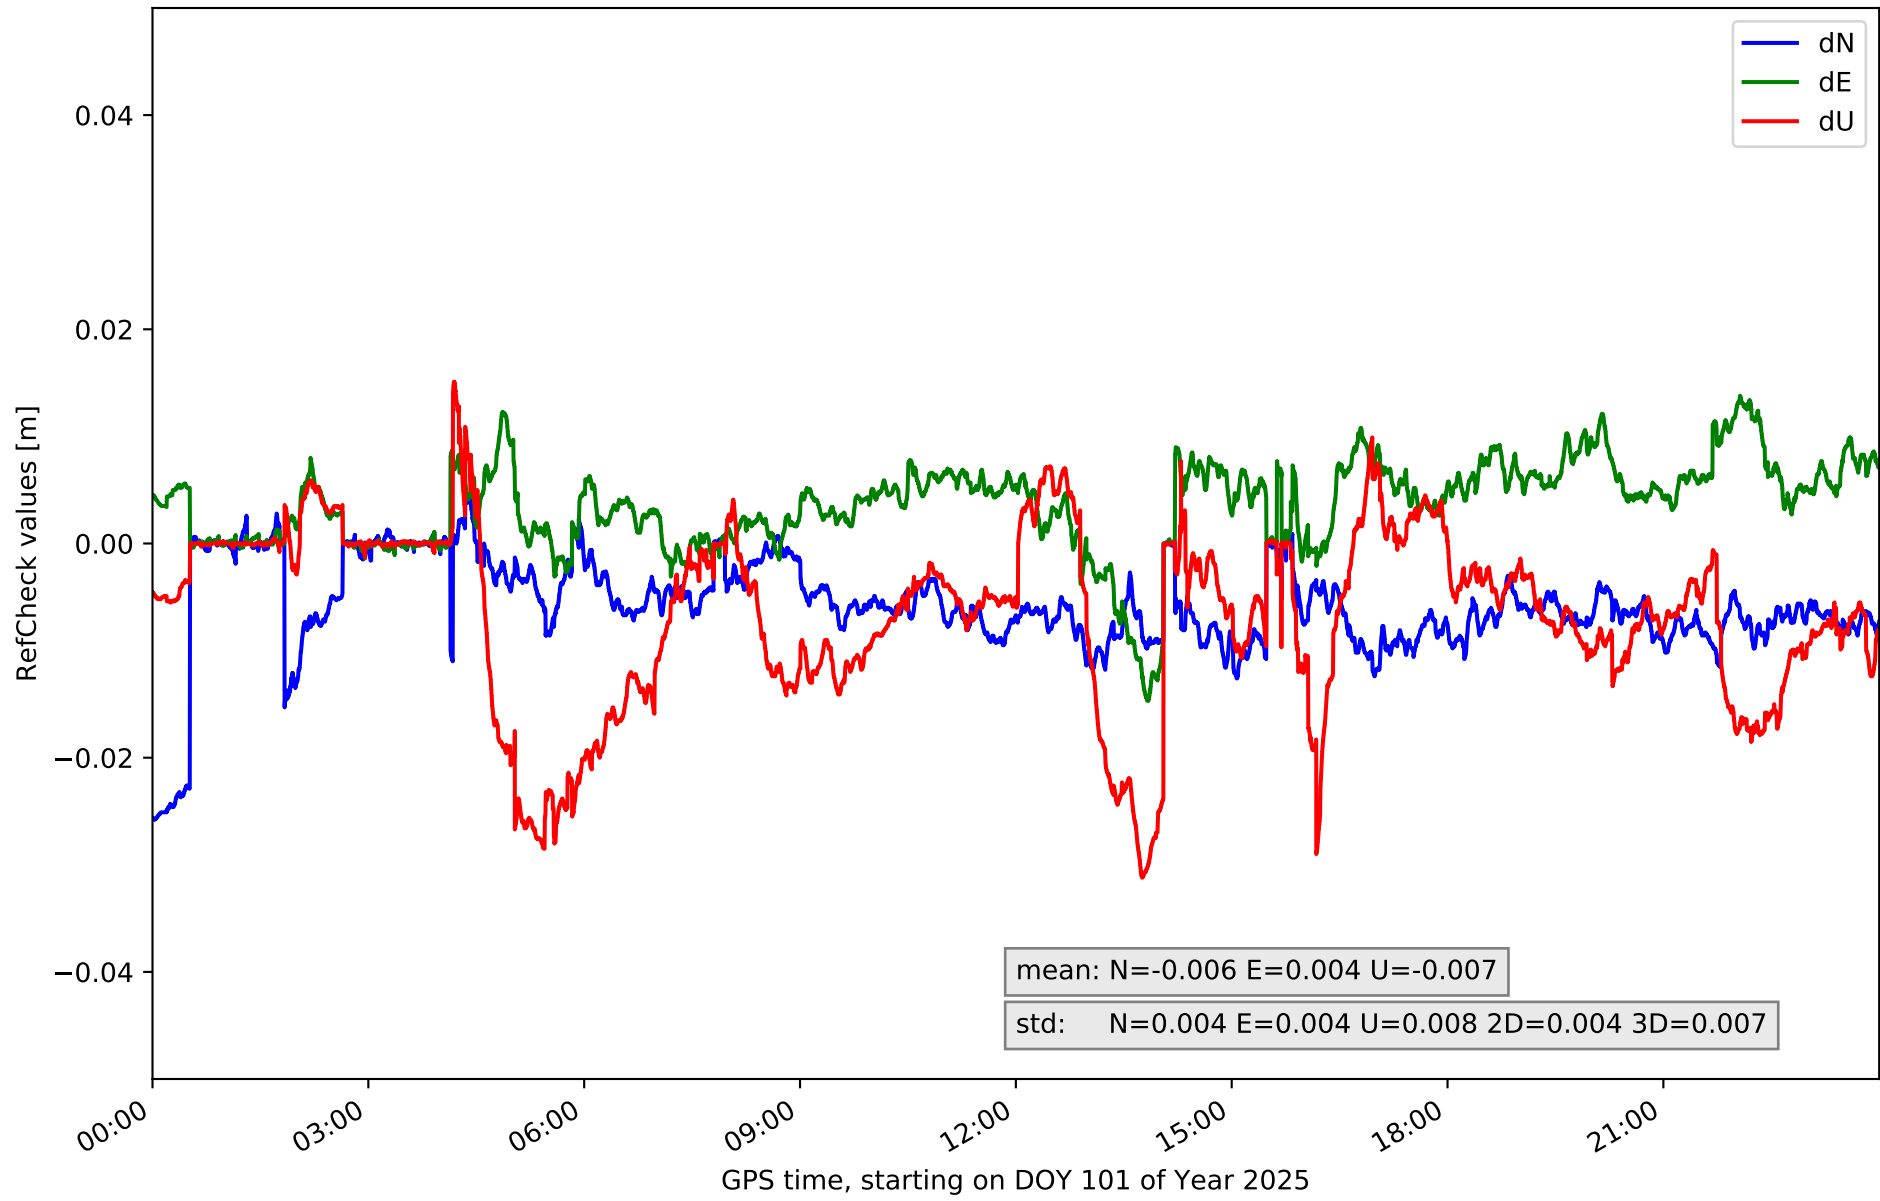


RefCheck for station LRES in network NT32

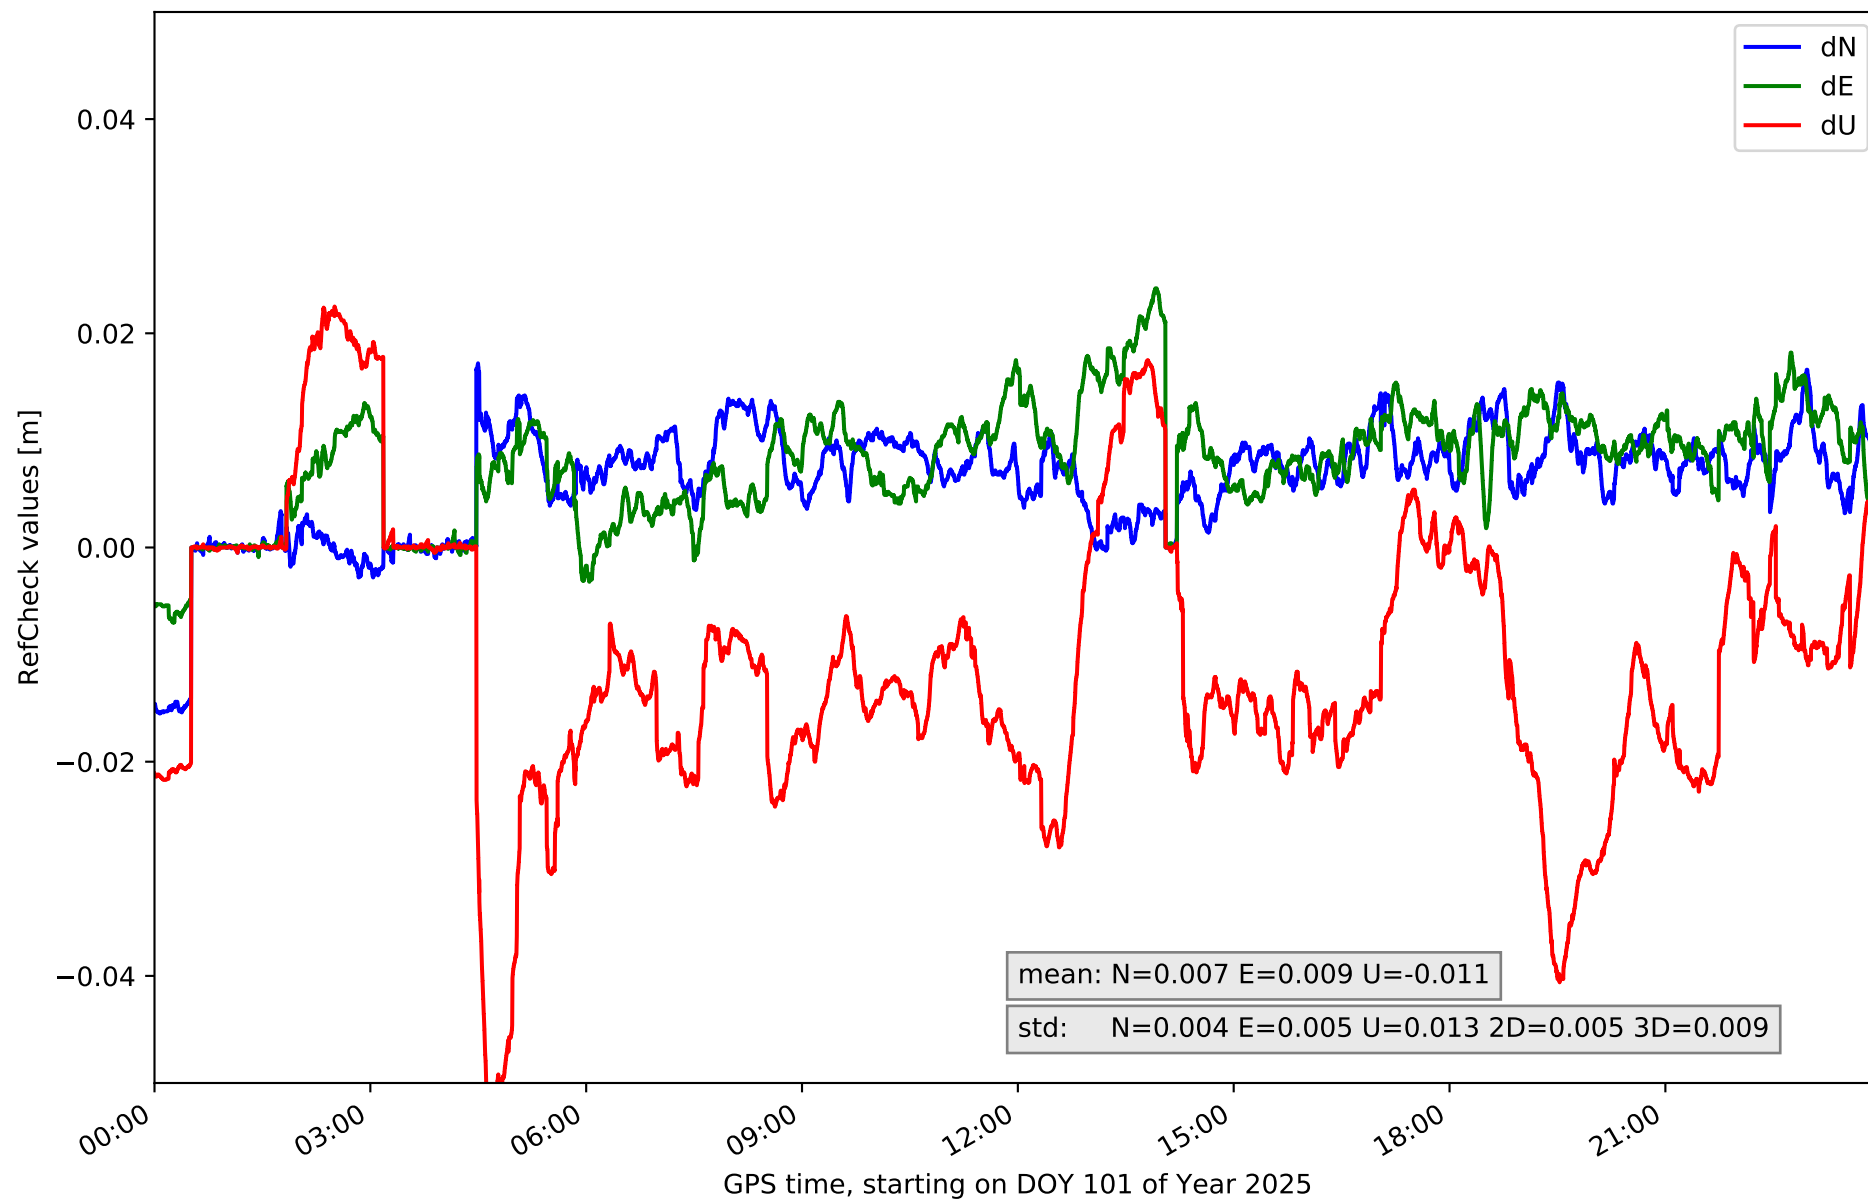


RefCheck for station TN01 in network NT32

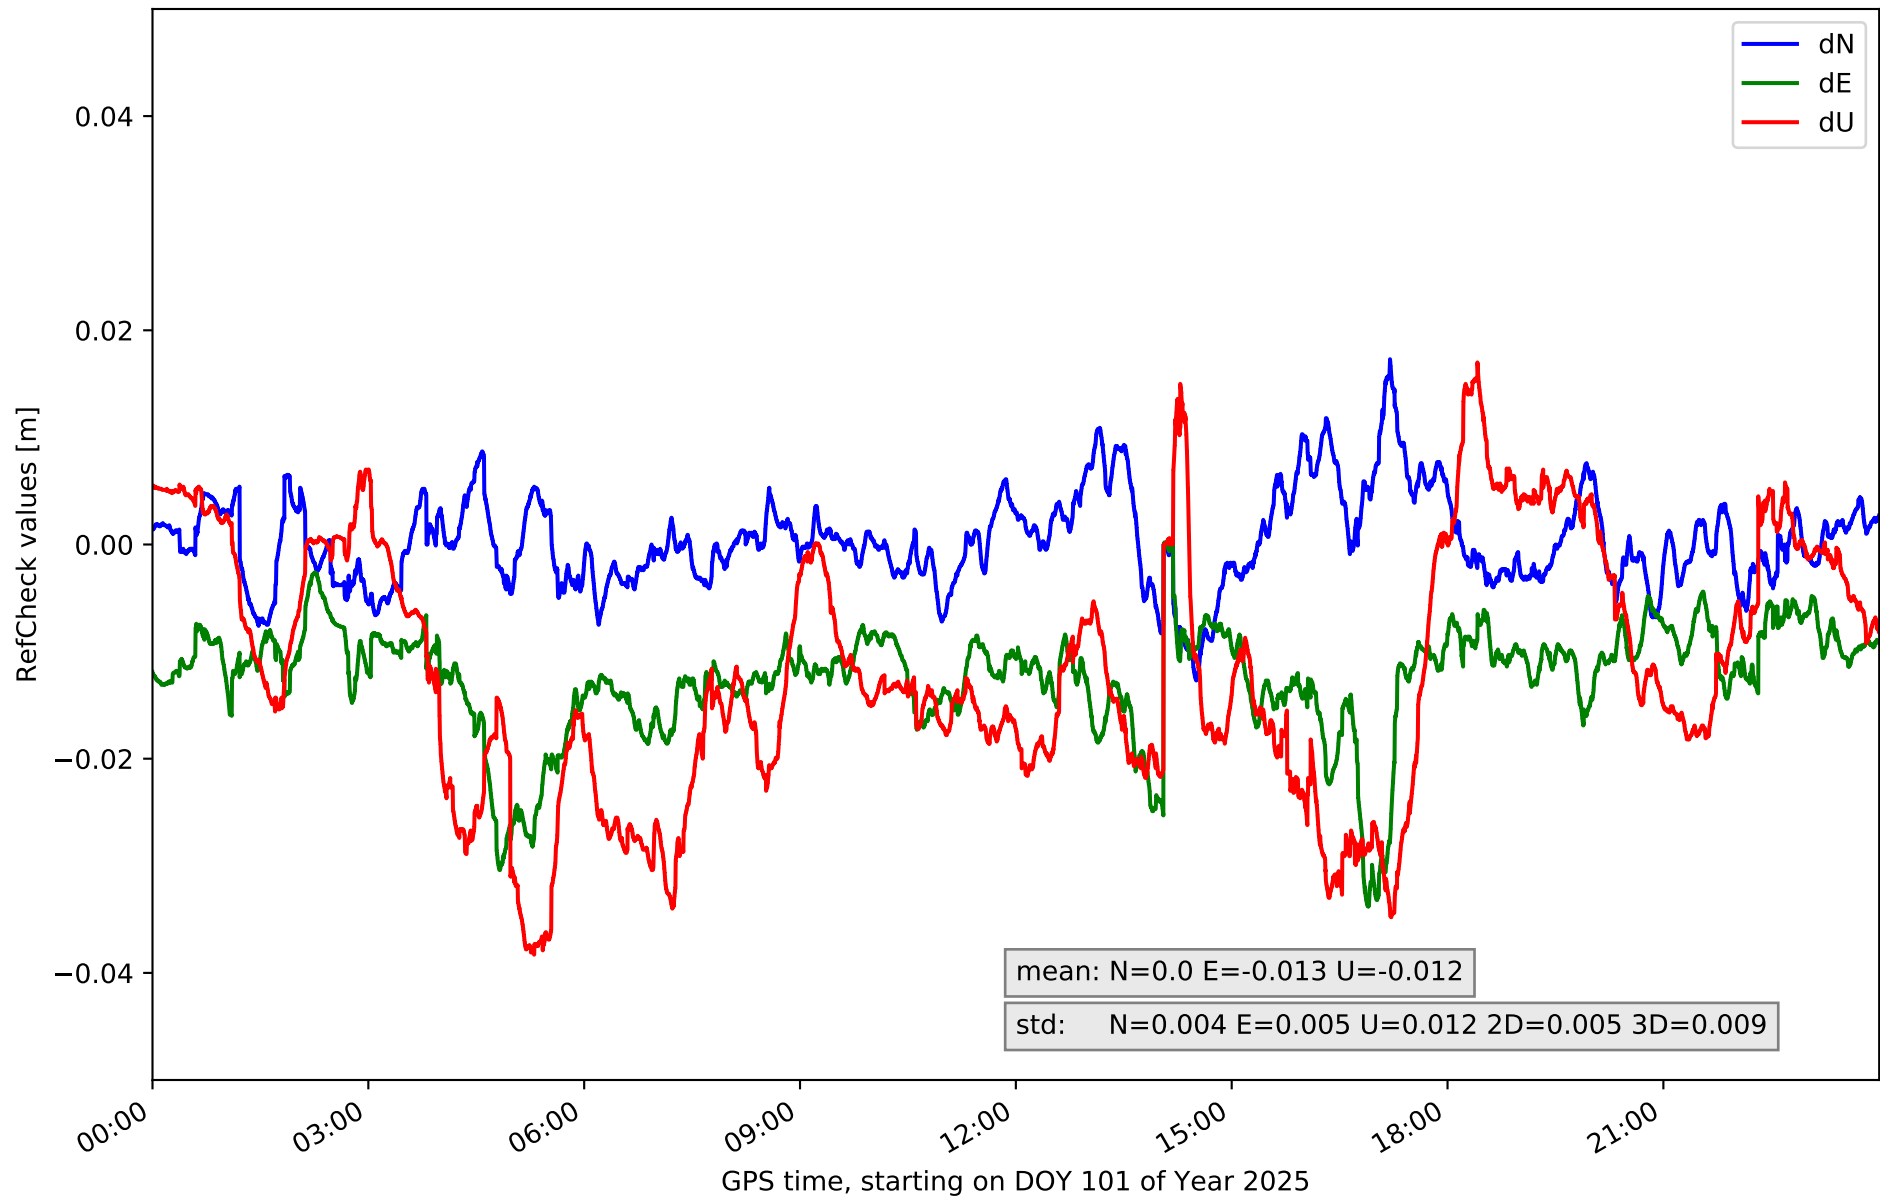


RefCheck for station TN02 in network NT32

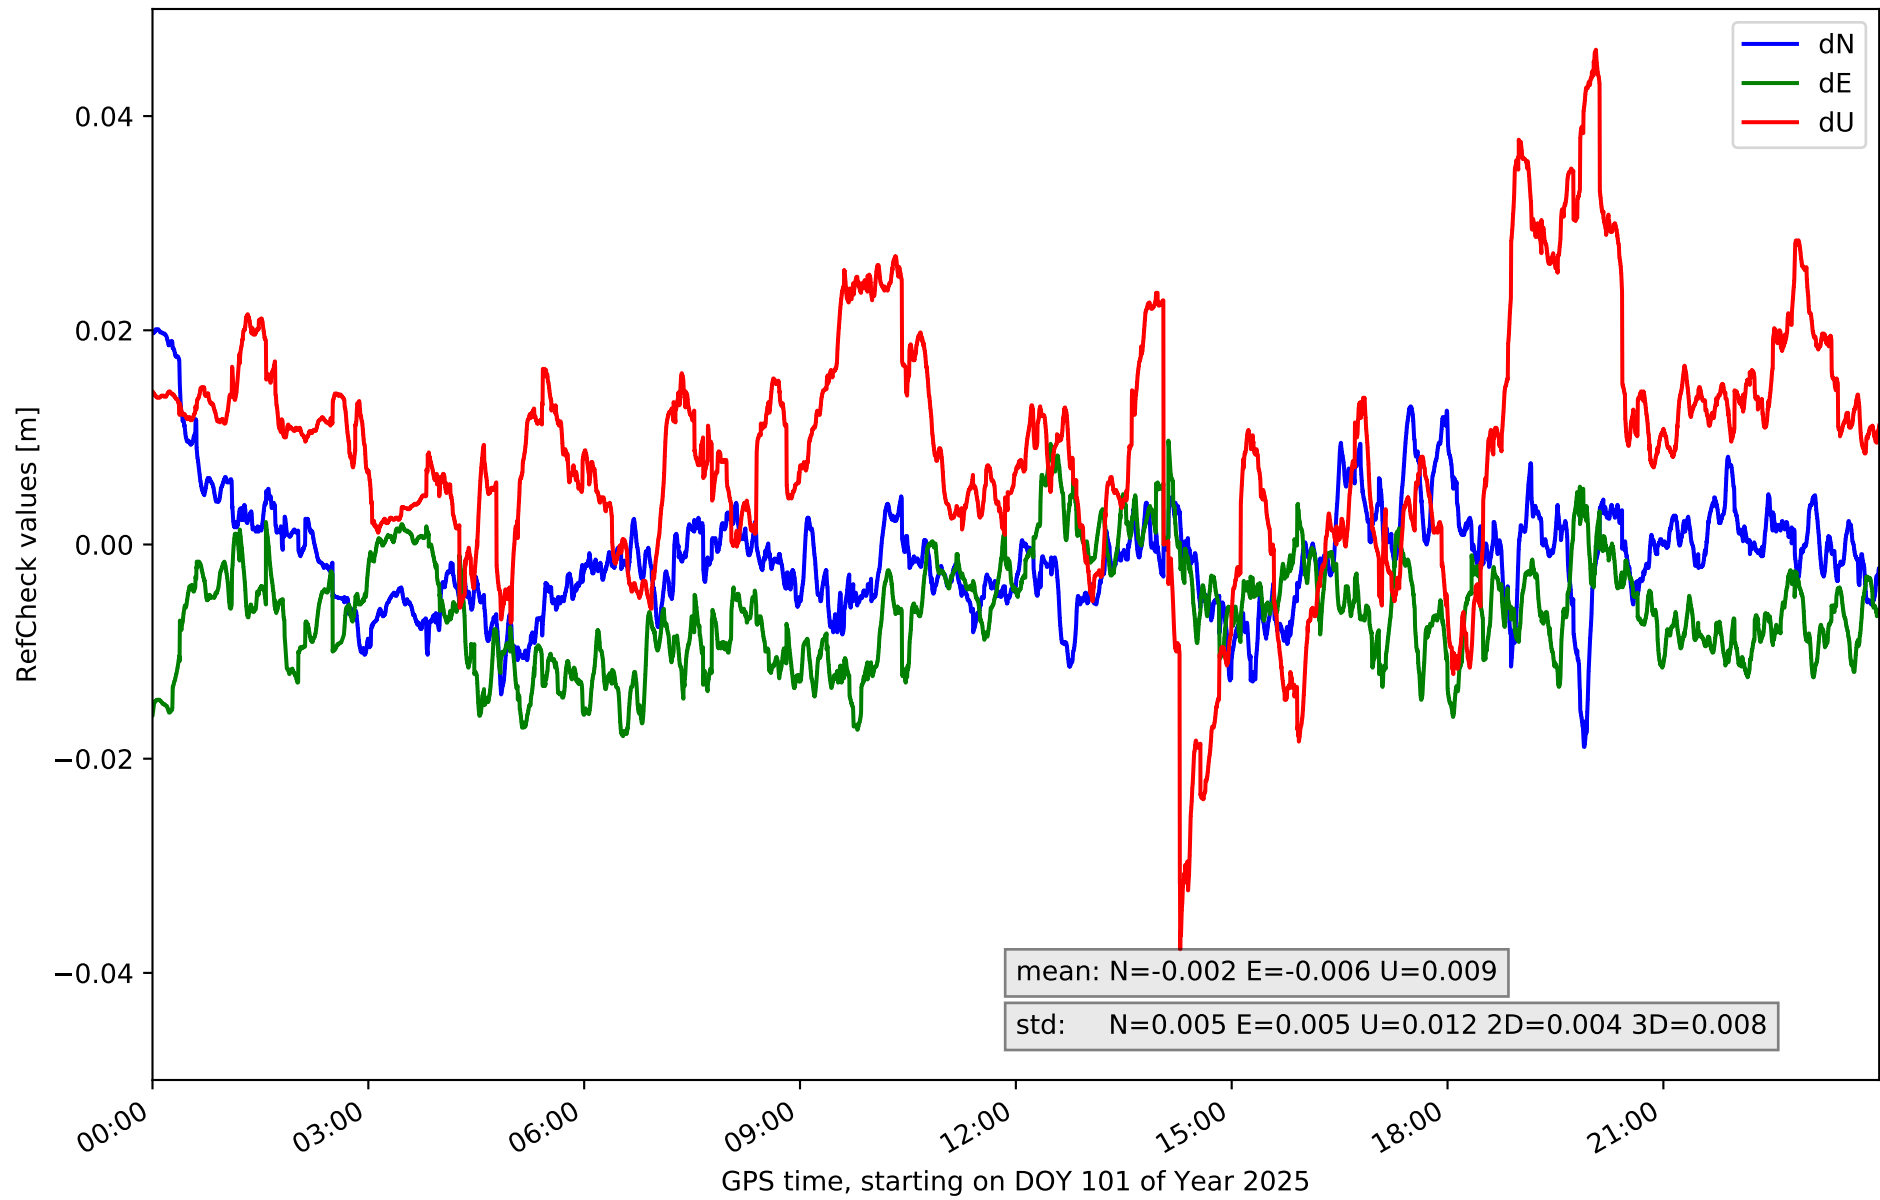


RefCheck for station TN03 in network NT32

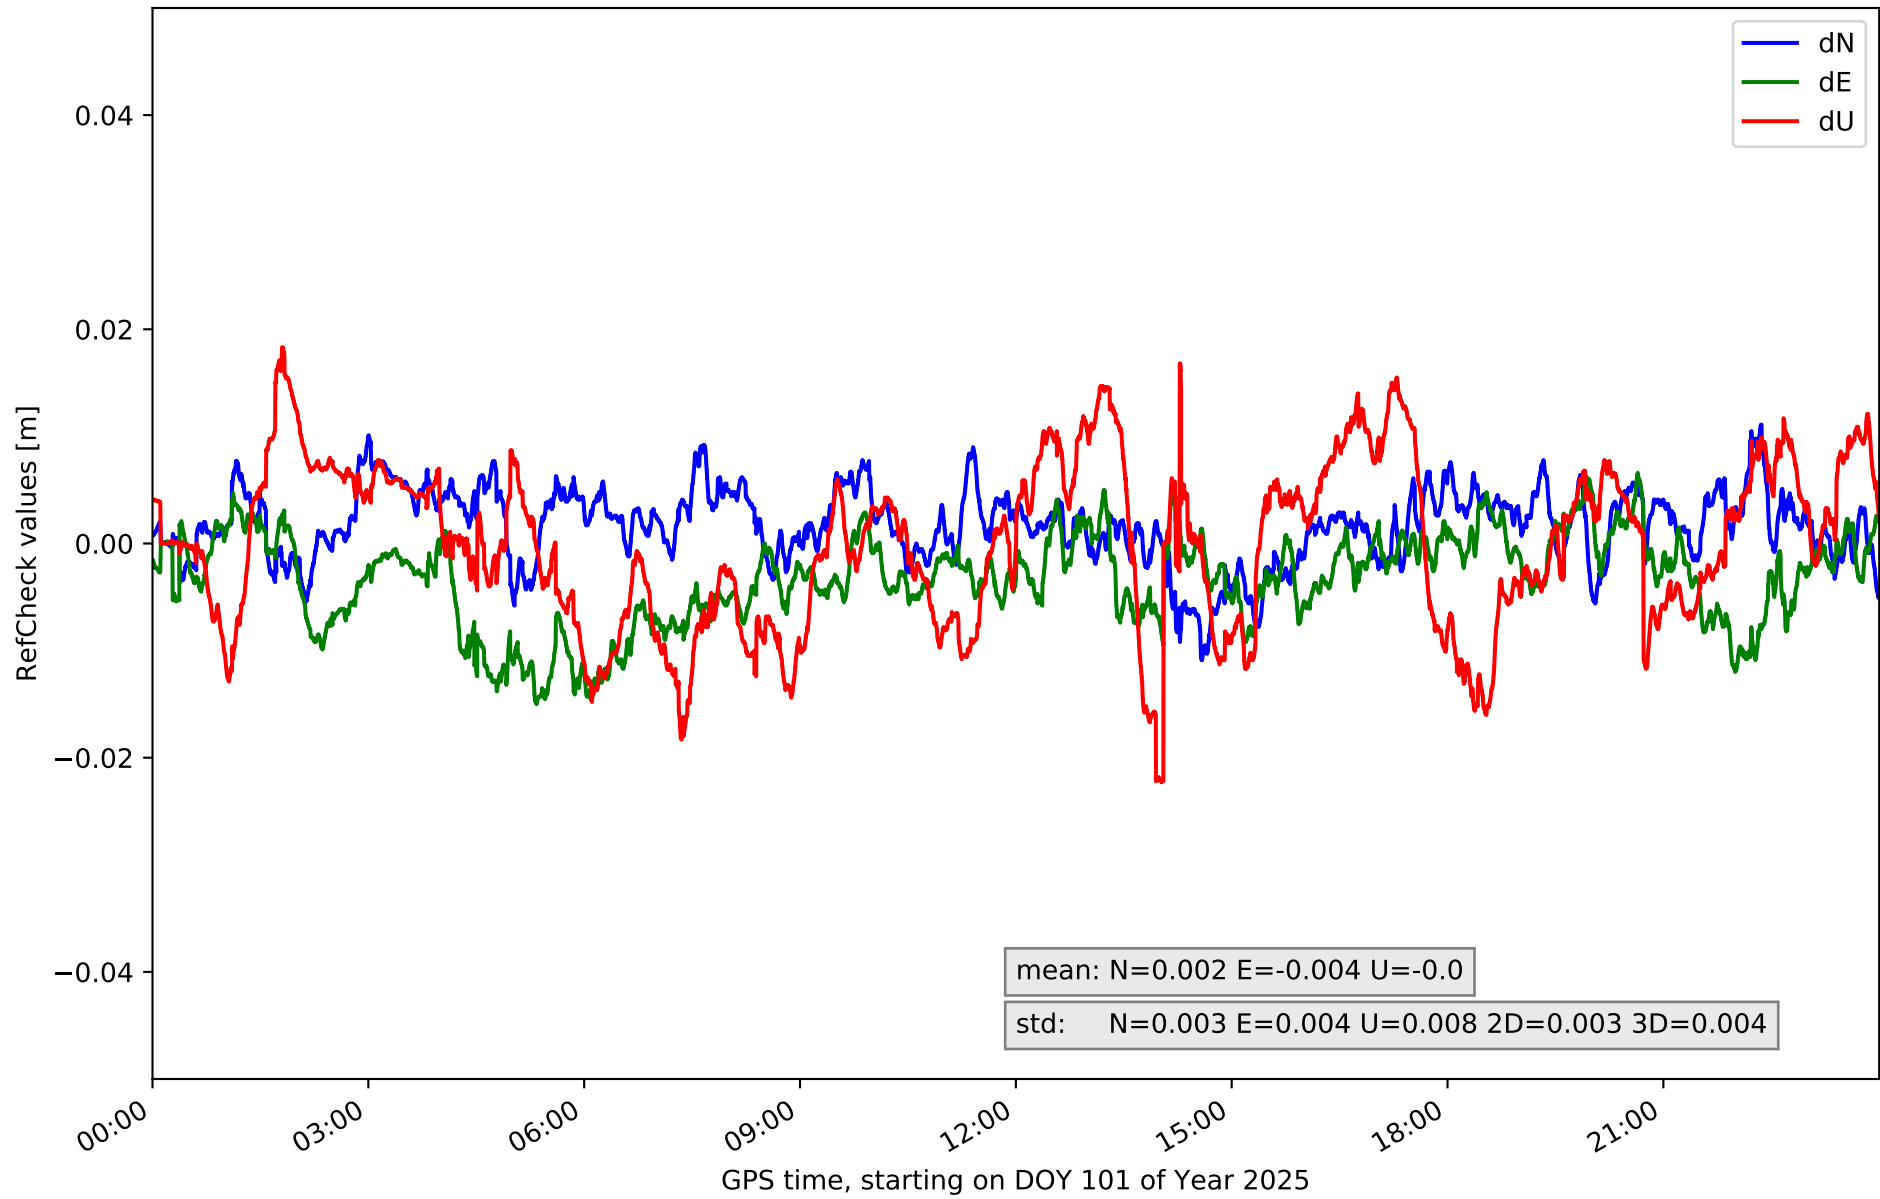


RefCheck for station TN04 in network NT32

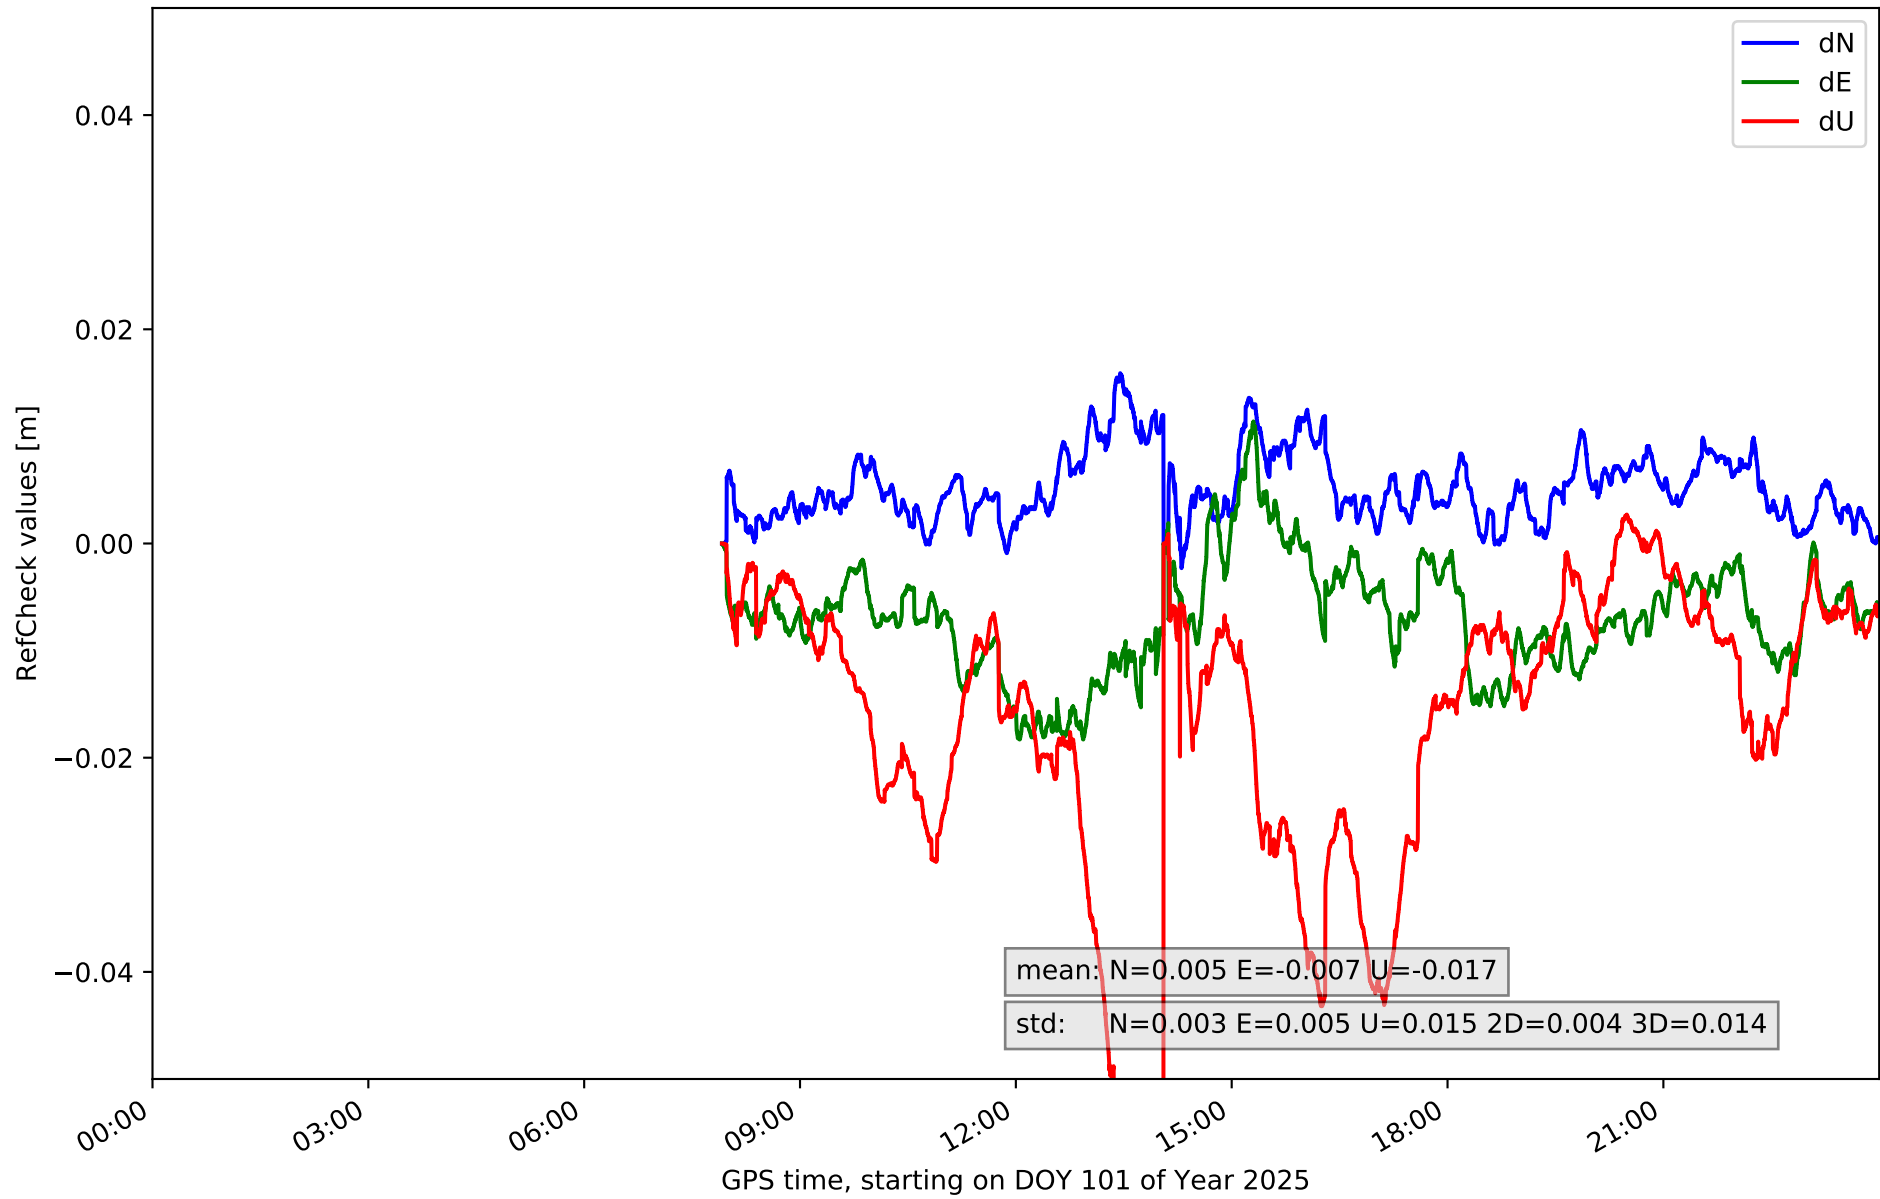


RefCheck for station TN06 in network NT32

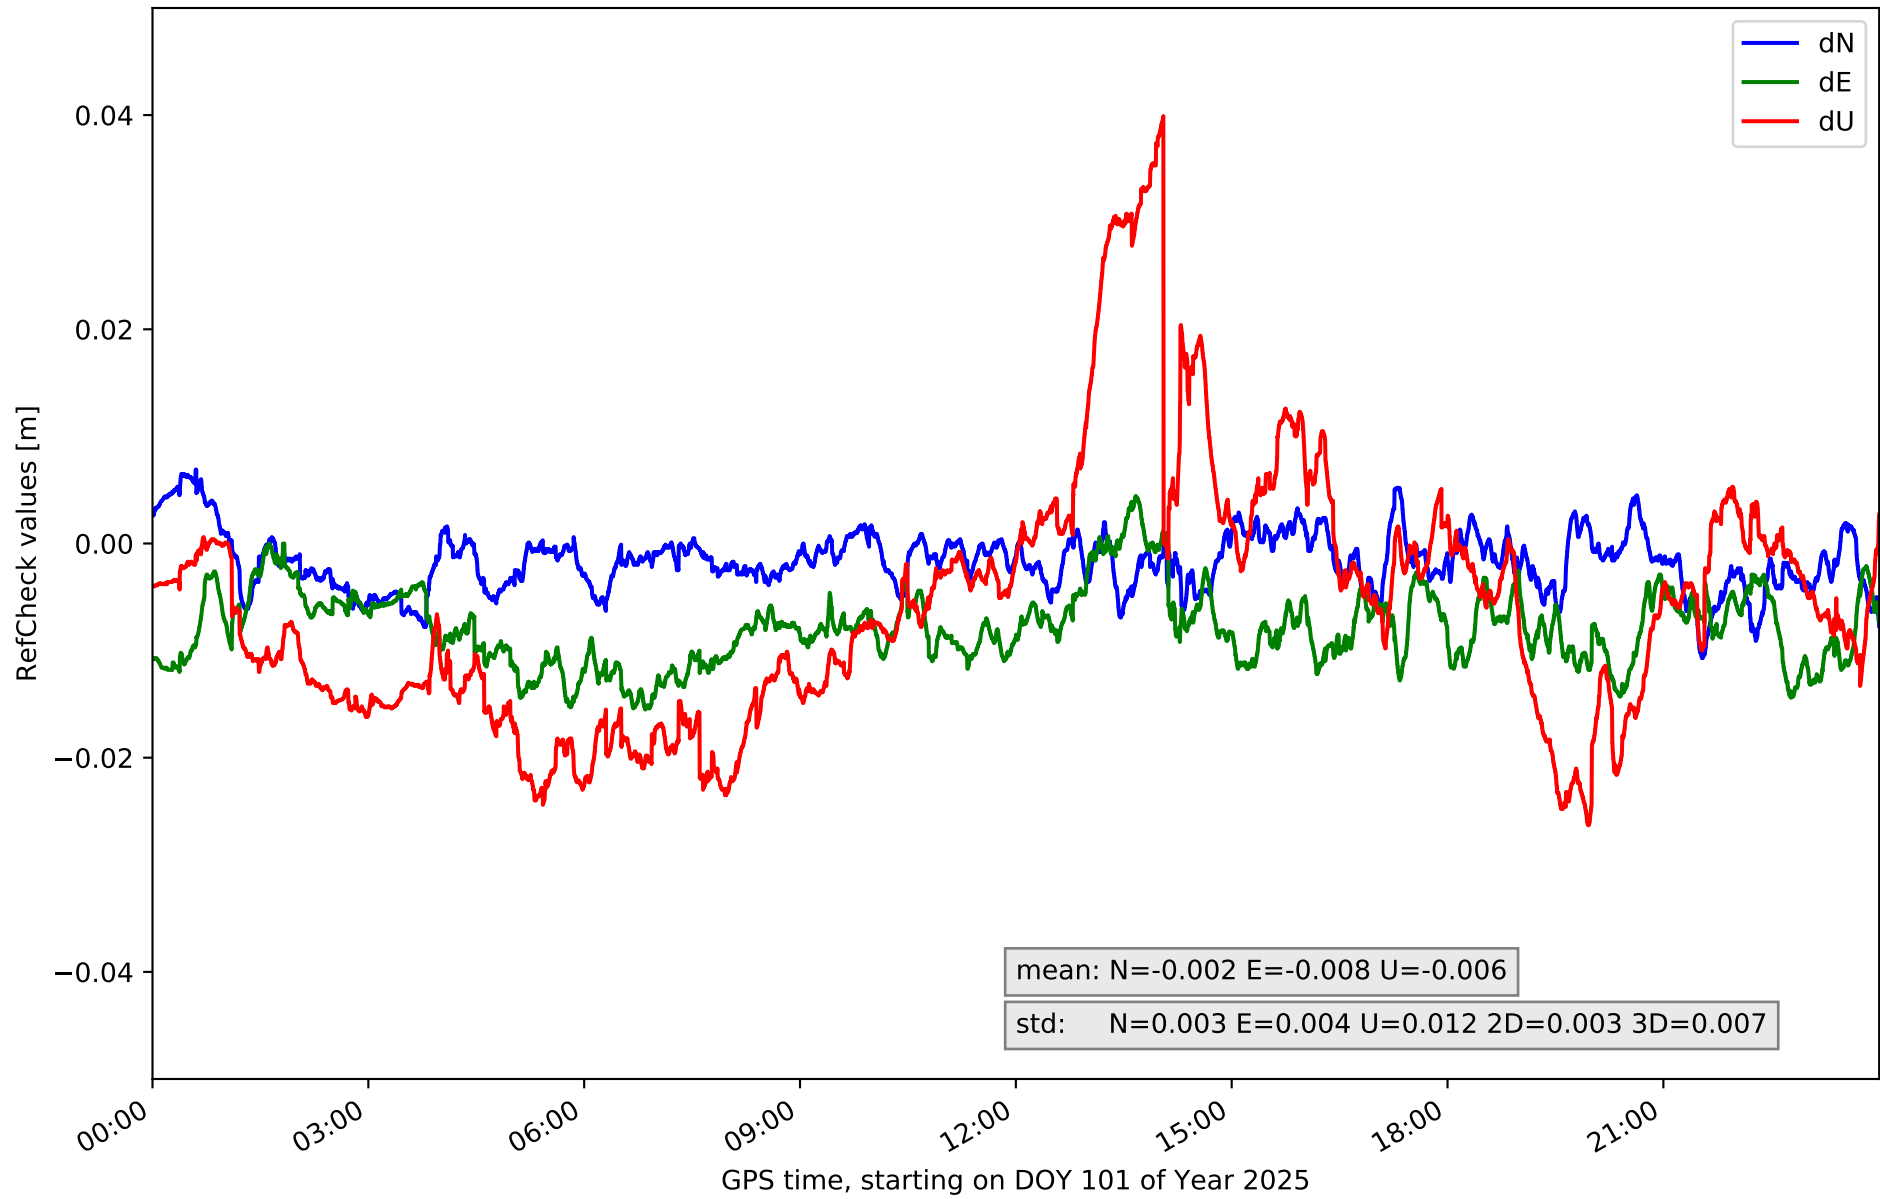

RefCheck for station TN09 in network NT32

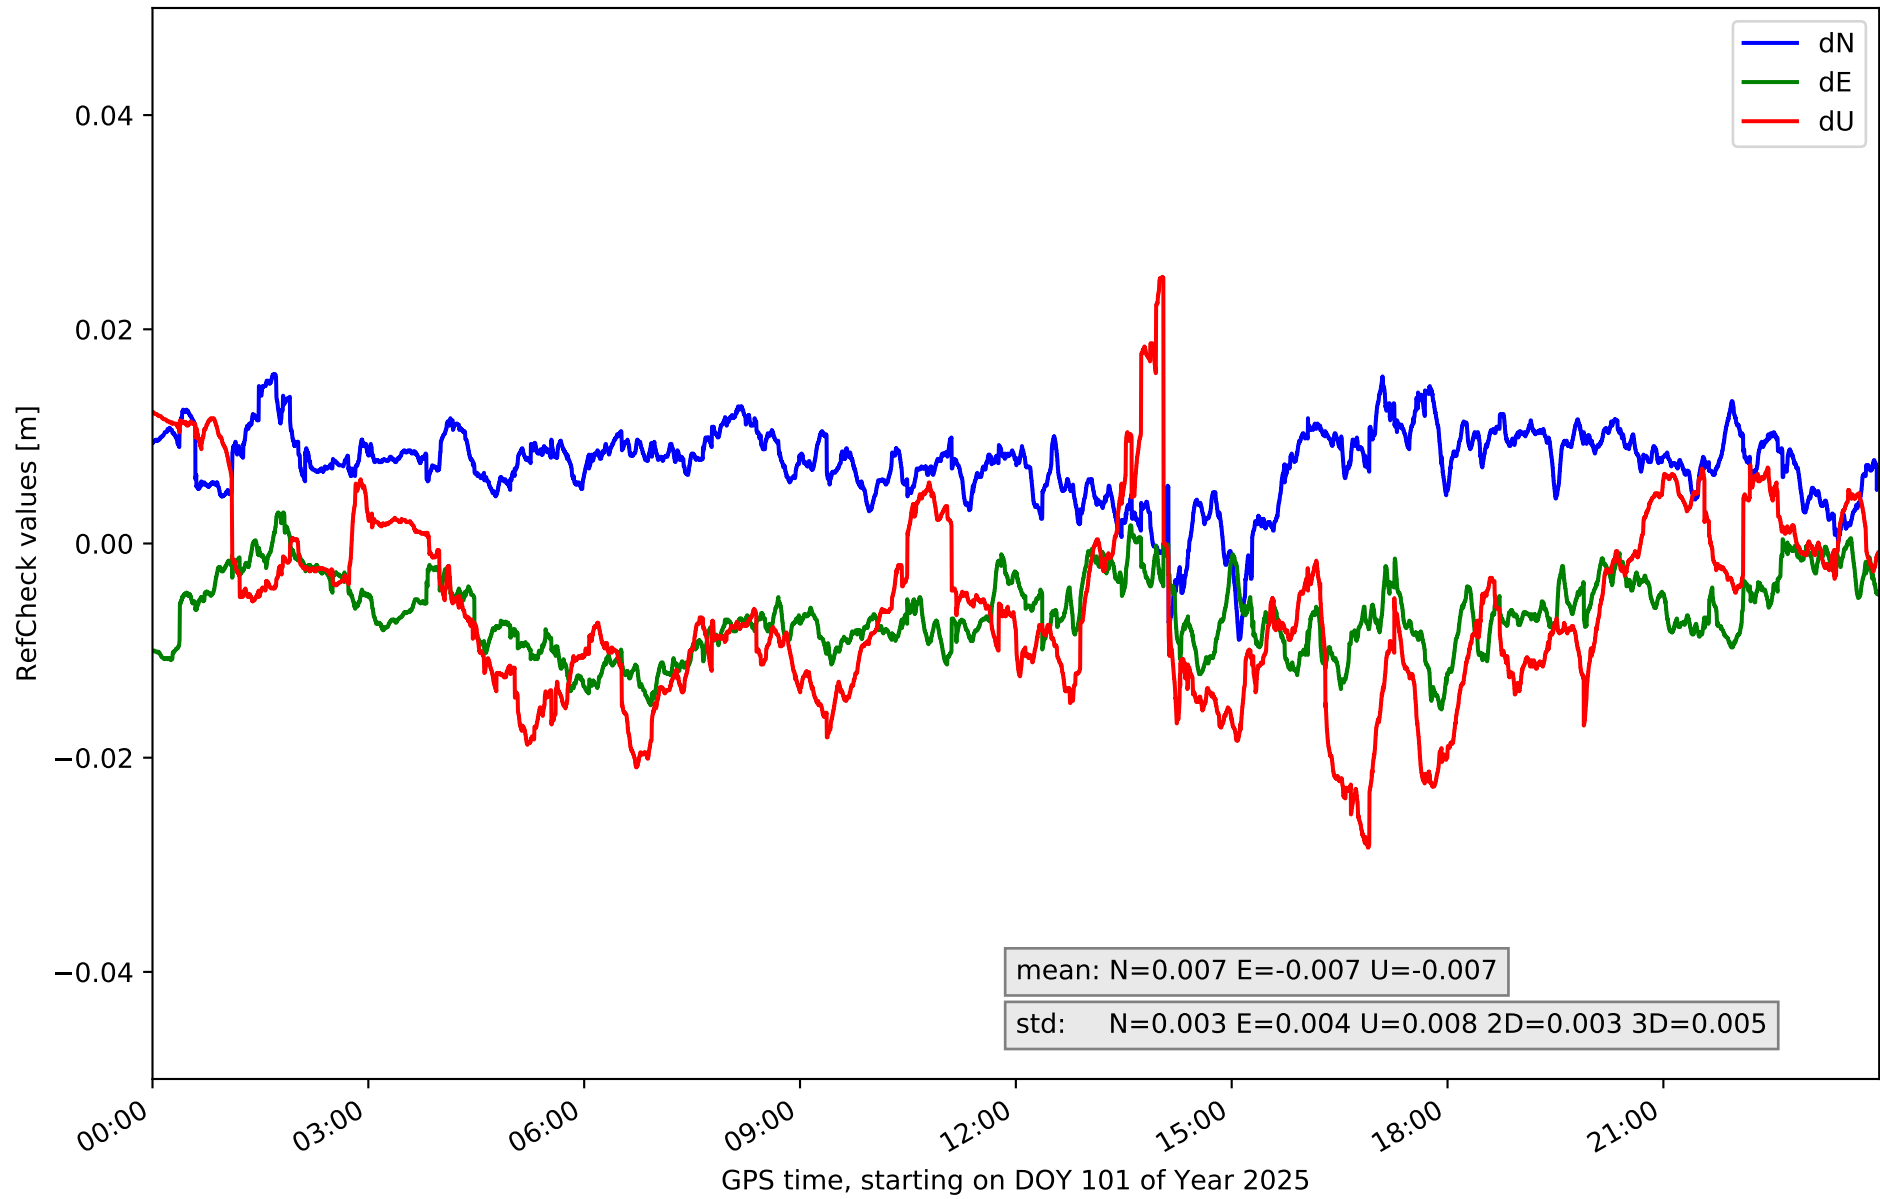

RefCheck for station TE11 in network NT32

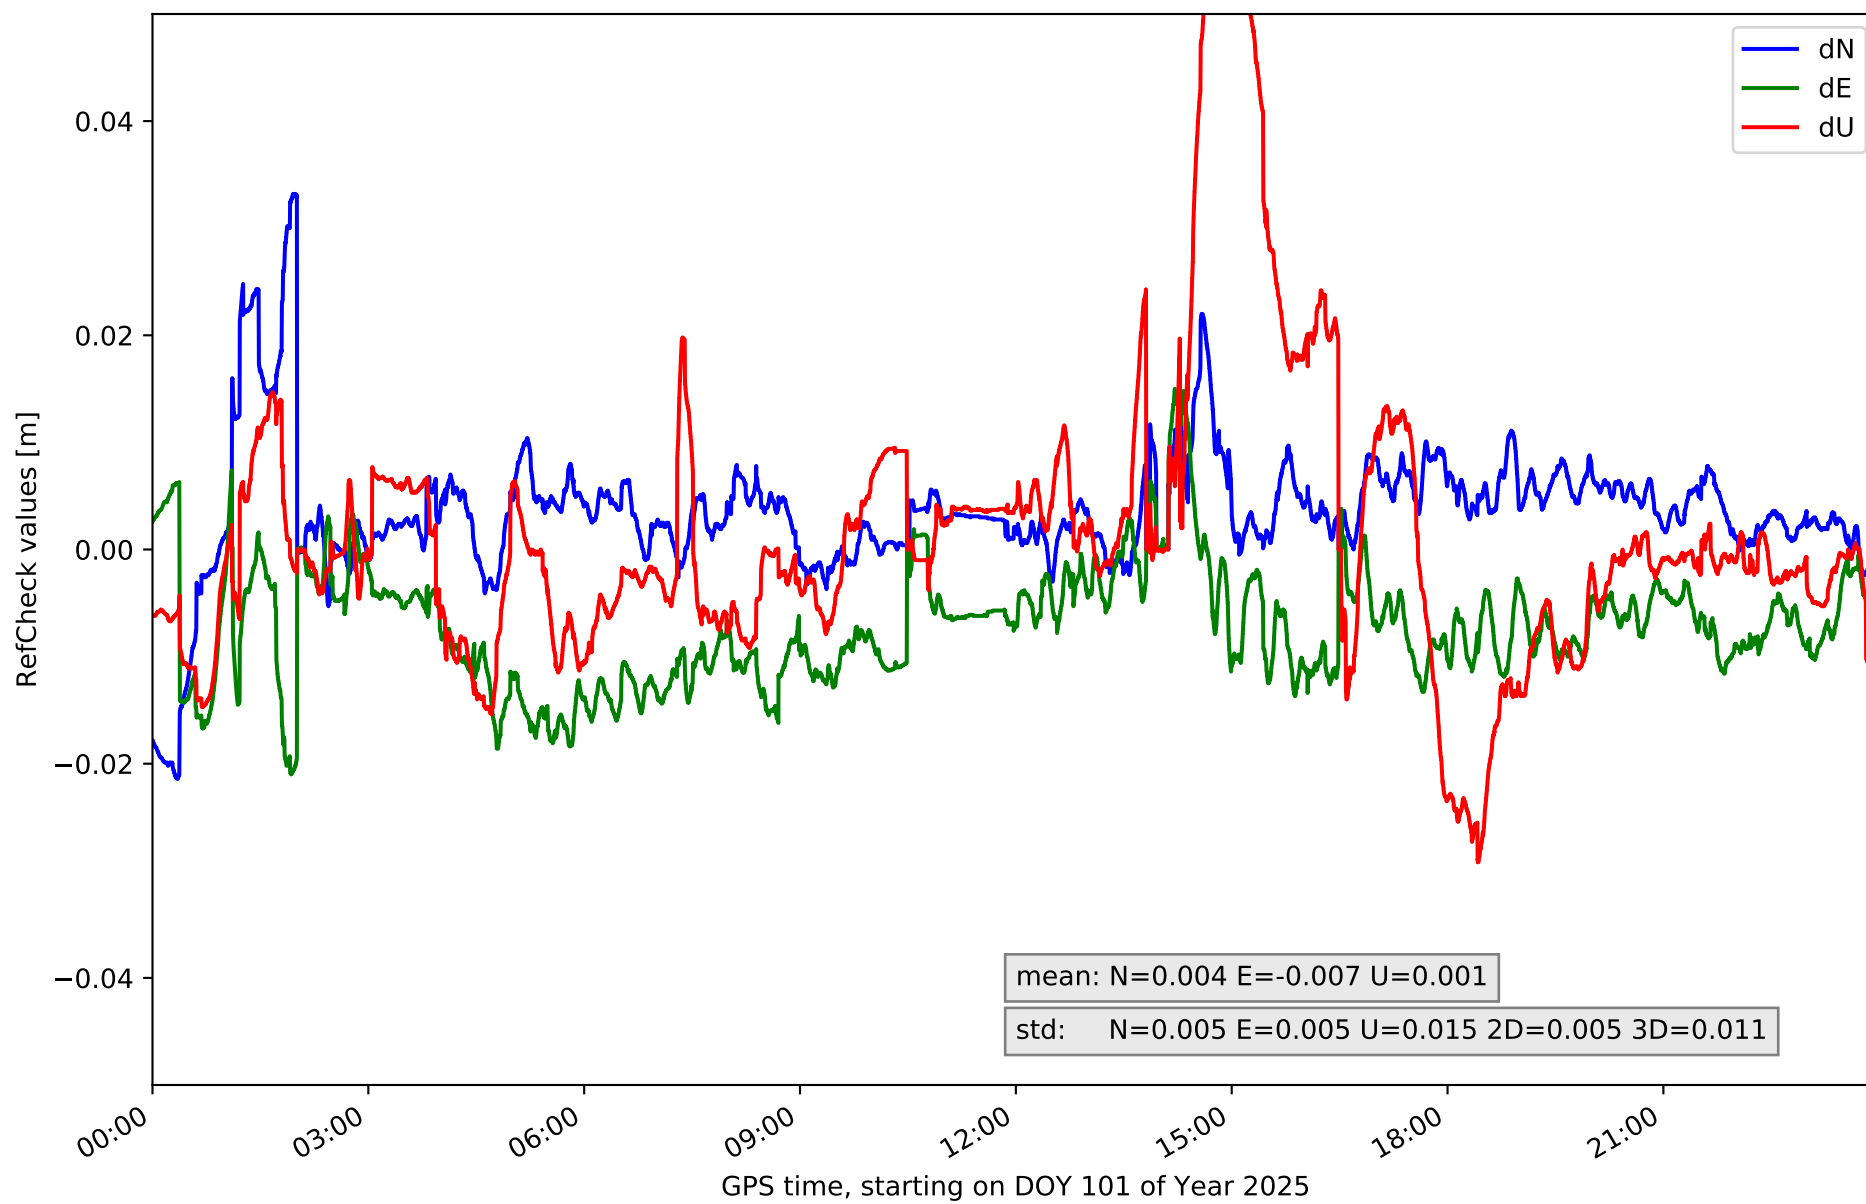

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.019	0.016	0.005	-0.001	0.028	0.006	-0.041	0.04	0.012	0.006	0.009	36319	54.1	13309	19.8
EH02	-0.011	0.021	0.005	-0.004	0.04	0.006	-0.022	0.048	0.012	0.006	0.011	43091	64.2	19965	29.7
GOM1	-0.015	0.023	0.004	-0.04	0.02	0.006	-0.028	0.08	0.016	0.005	0.011	35718	53.2	15837	23.6
IZAN	-0.011	0.016	0.003	-0.018	0.014	0.004	-0.04	0.048	0.012	0.004	0.009	16544	24.6	11504	17.1
LP01	-0.026	0.004	0.005	-0.014	0.033	0.007	-0.038	0.08	0.017	0.007	0.011	25340	37.7	24056	35.8
LP03	-0.032	0.013	0.004	-0.018	0.024	0.006	-0.043	0.04	0.013	0.004	0.009	9034	13.5	9550	14.2
LPAL	-0.026	0.004	0.004	-0.015	0.014	0.004	-0.031	0.015	0.008	0.004	0.007	20410	30.4	9451	14.1
LRES	-0.015	0.017	0.004	-0.007	0.024	0.005	-0.055	0.022	0.013	0.005	0.009	49127	73.2	29845	44.5
TN01	-0.013	0.017	0.004	-0.034	0.0	0.005	-0.038	0.017	0.012	0.005	0.009	51275	76.4	28701	42.7
TN02	-0.019	0.02	0.005	-0.018	0.01	0.005	-0.038	0.046	0.012	0.004	0.008	23813	35.5	14645	21.8
TN03	-0.011	0.011	0.003	-0.015	0.007	0.004	-0.022	0.018	0.008	0.003	0.004	9460	14.1	500	0.7
TN04	-0.002	0.016	0.003	-0.018	0.011	0.005	-0.079	0.003	0.015	0.004	0.014	18809	40.1	17813	38.0
TN06	-0.011	0.007	0.003	-0.015	0.004	0.004	-0.026	0.04	0.012	0.003	0.007	23298	34.7	16759	25.0
TN09	-0.009	0.016	0.003	-0.015	0.003	0.004	-0.028	0.025	0.008	0.003	0.005	40641	60.5	8875	13.2
TE11	-0.021	0.033	0.005	-0.021	0.017	0.005	-0.029	0.067	0.015	0.005	0.011	30477	45.4	11724	17.5
Mean	-0.016	0.016	0.004	-0.017	0.017	0.005	-0.037	0.039	0.012	0.005	0.009	28890.4	43.8	15502.3	23.8
Min/Max	-0.032	0.033	0.005	-0.04	0.04	0.007	-0.079	0.08	0.017	0.007	0.014	51275	76.4	29845	44.5

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	81.7	85.2	69.7	86.6	83.8
considering satellites with dual-frequency fixed	77.3	80.4	59.4	82.9	81.5
considering all signals separately	78.3	80.6	59.5	83.2	81.1