

summary for network N32T

timeperiod chosen: from 2025-04-16-00:00:00 until 2025-04-16-23:59:58

average update rate (durations larger than 15 seconds considered as observation gap): 2.2 seconds


average fixing percentage with threshold set to 0.3: 91.7 percent

stations available: 14 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.508
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

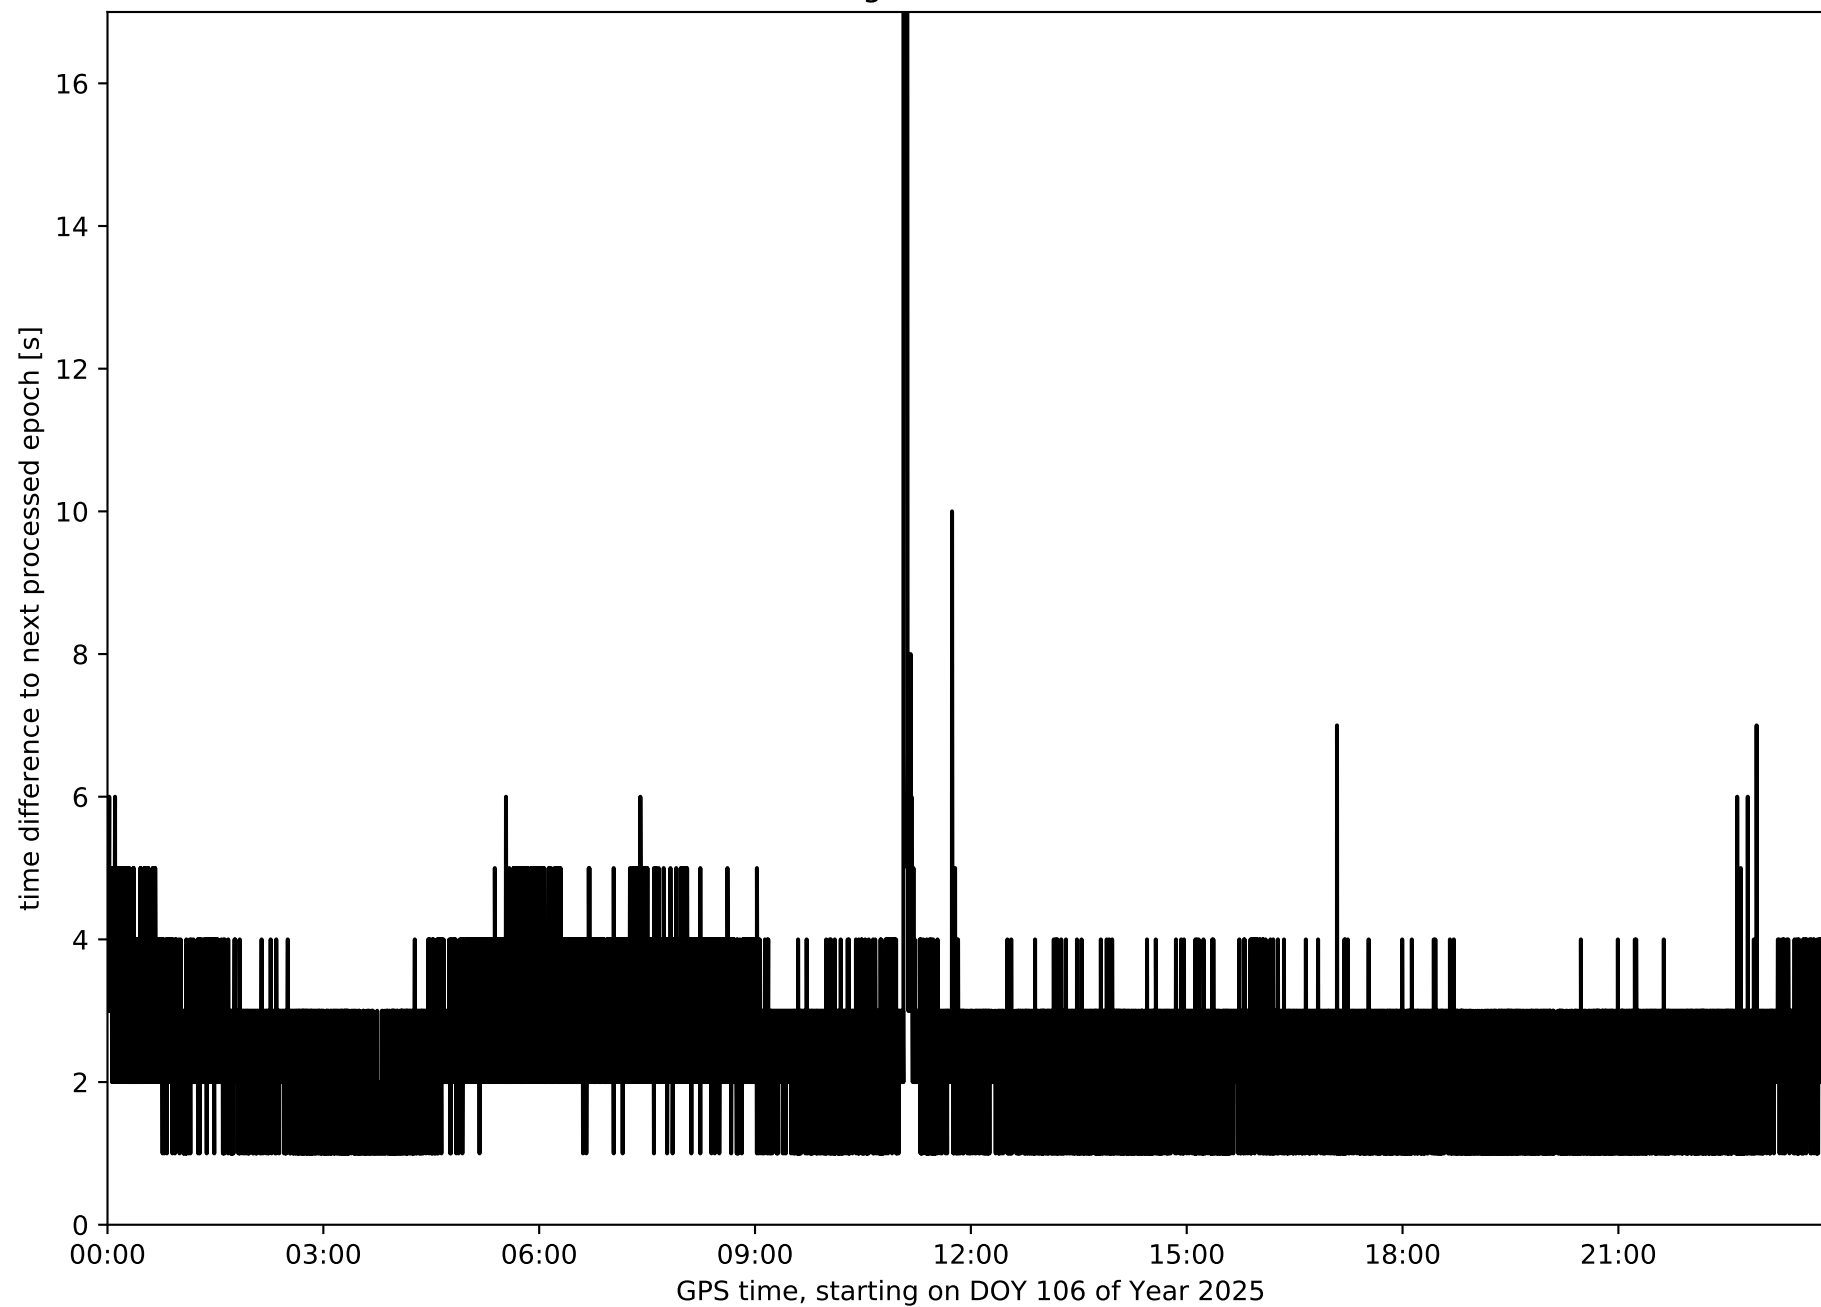


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

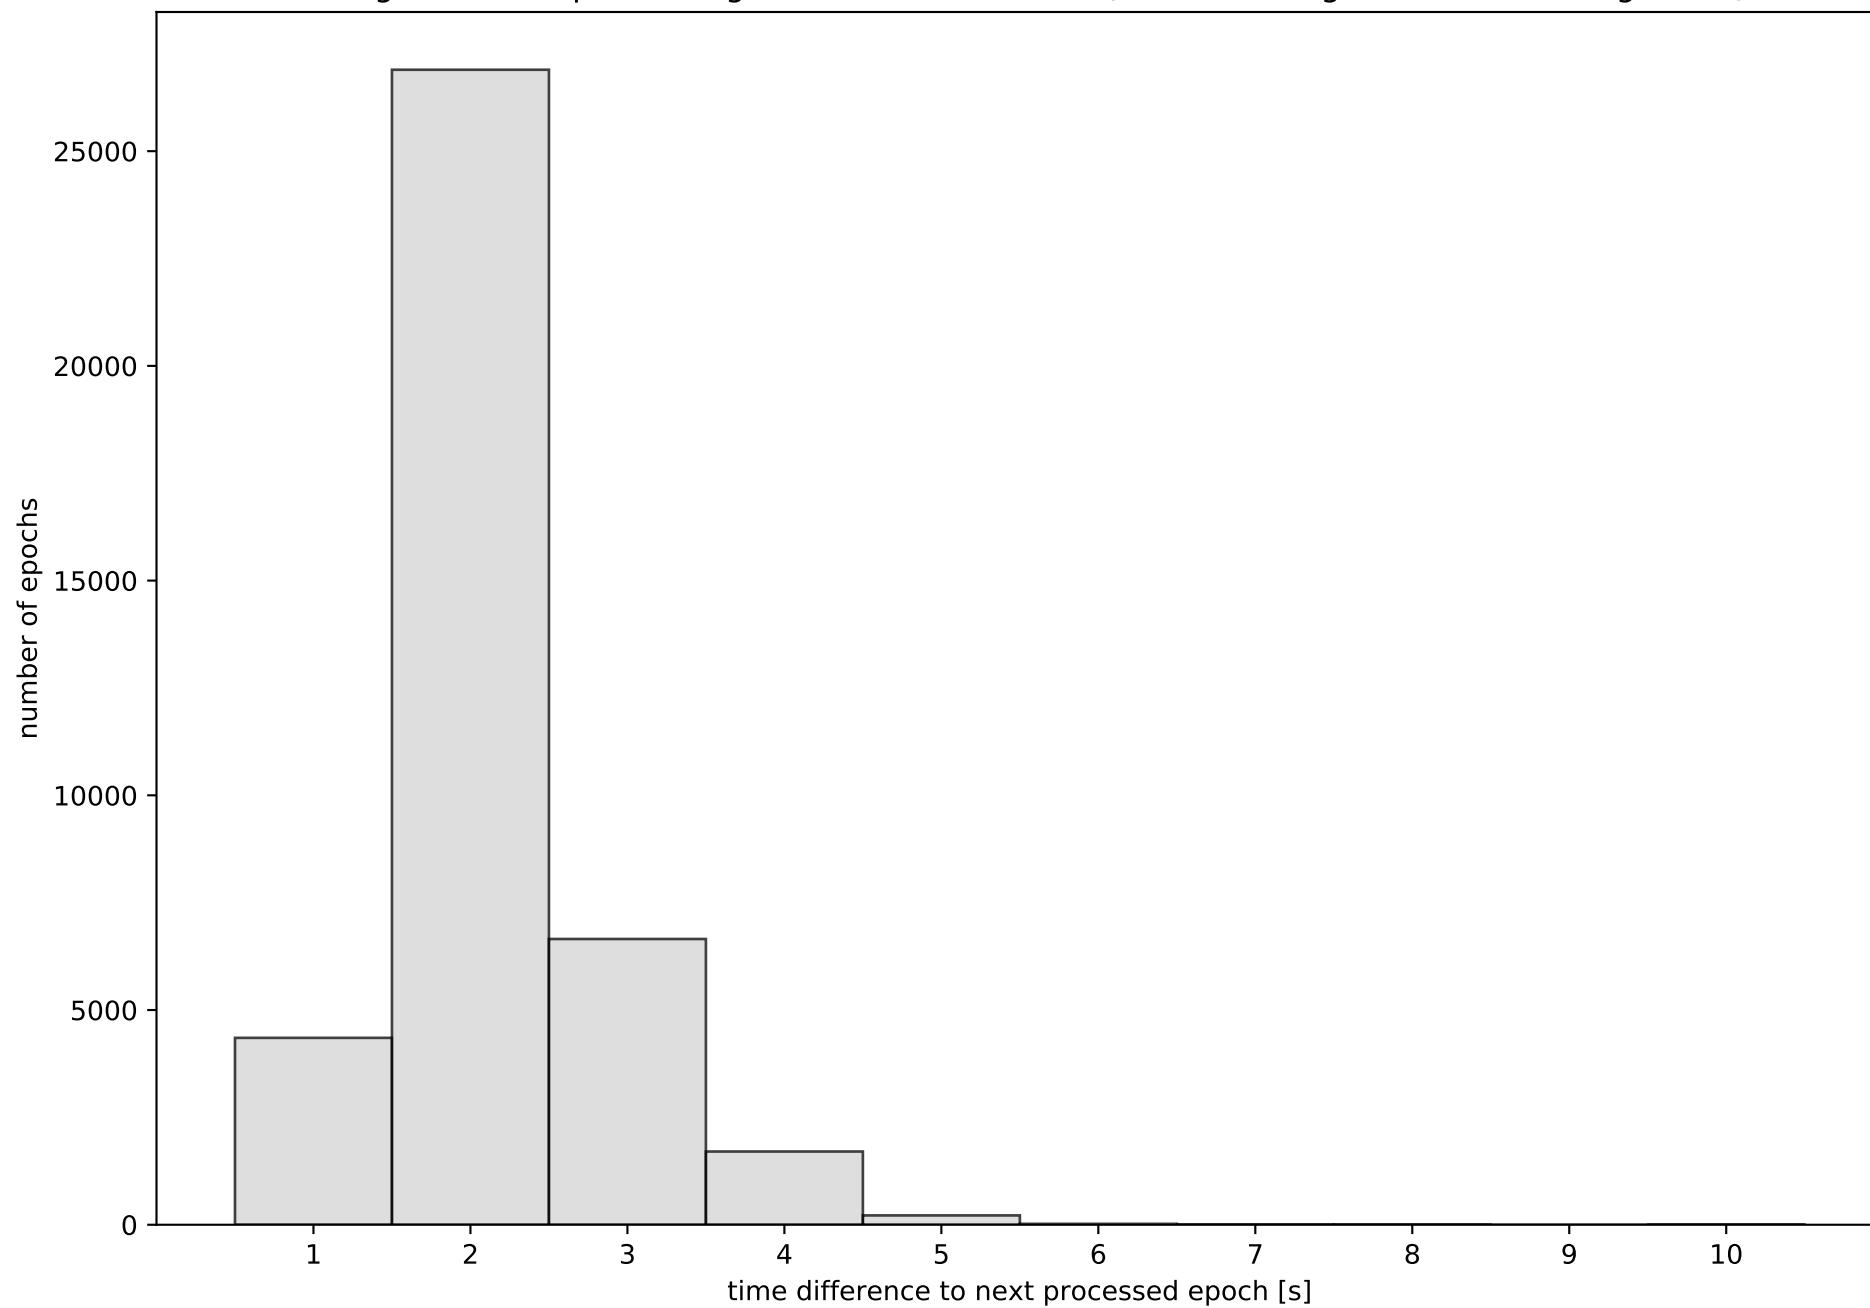


Network N32T with threshold set to 0.3

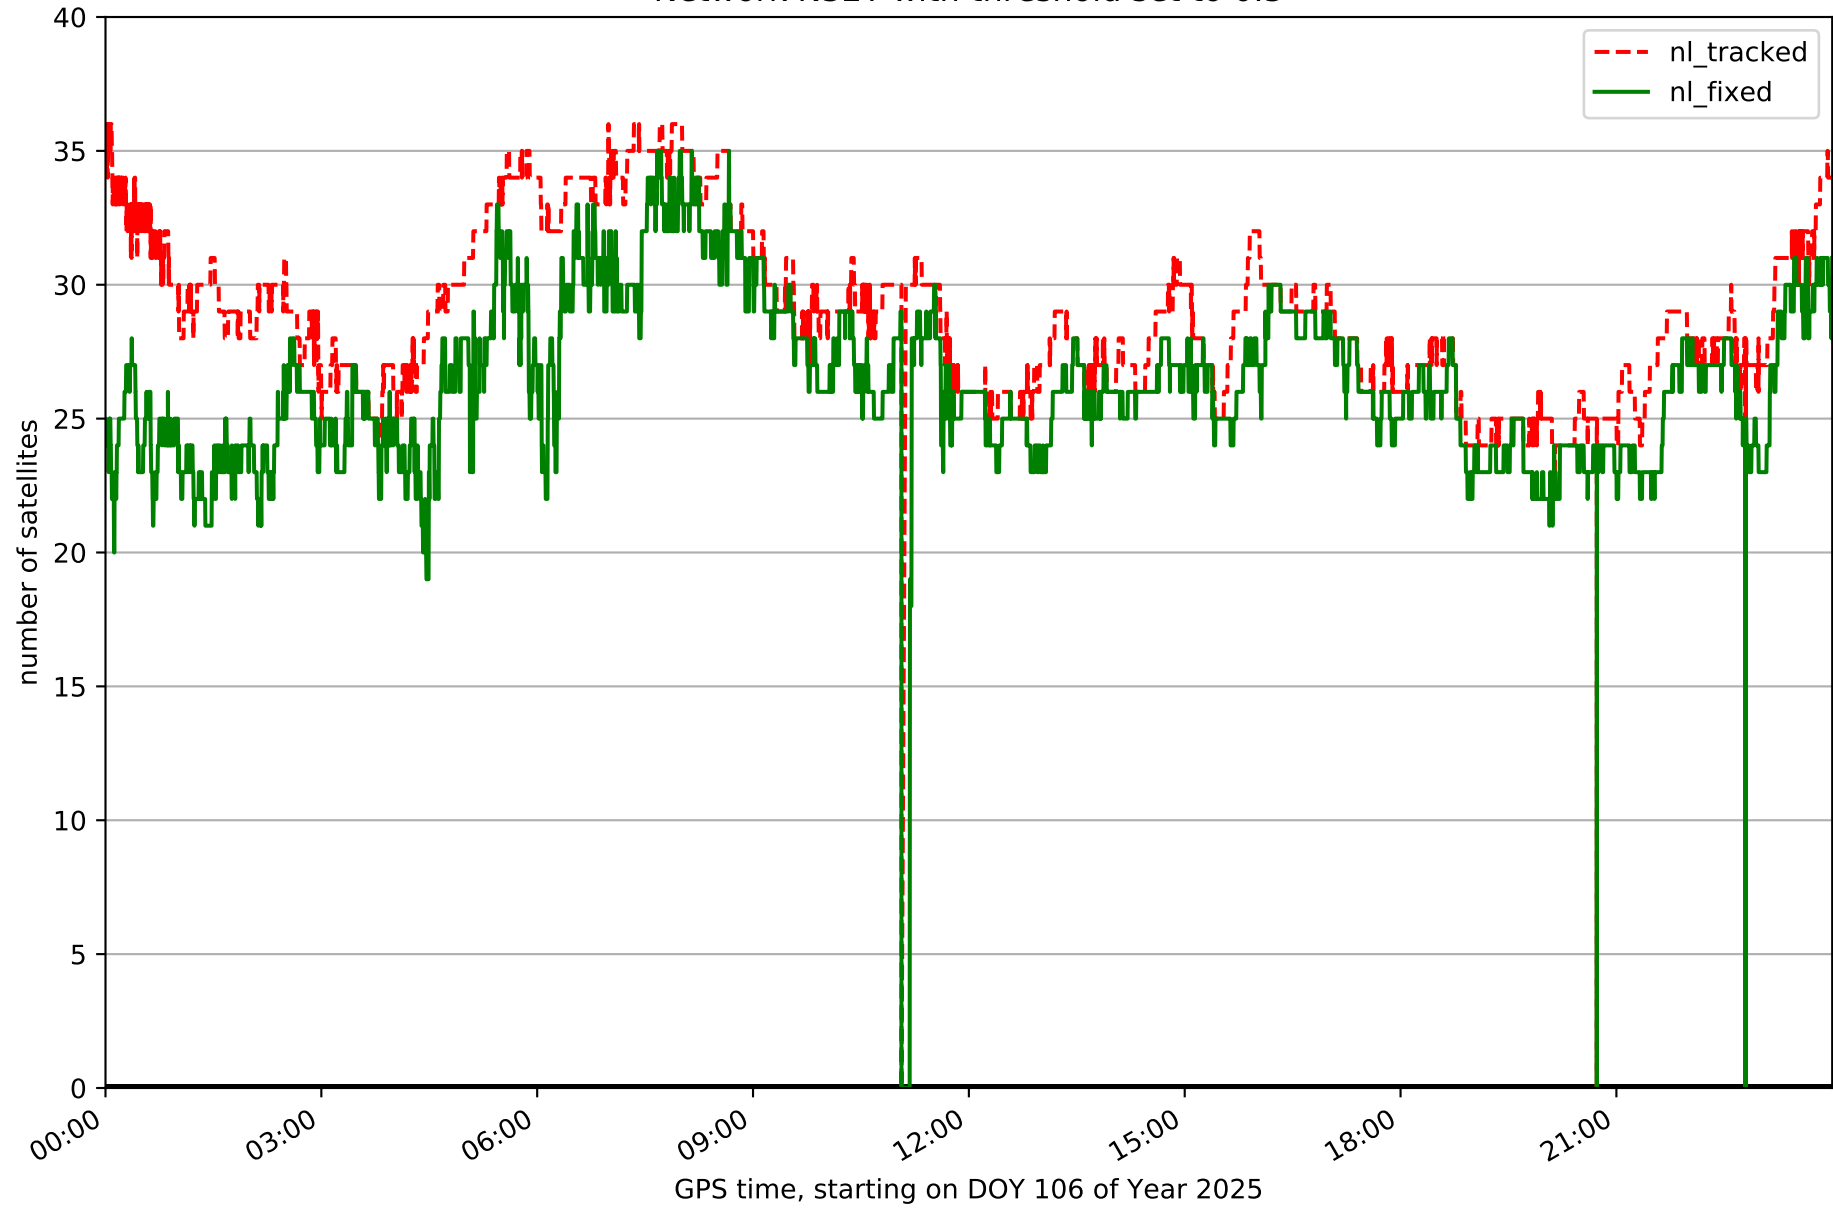


Fixing percentage of satellites in network N32T with threshold set to 0.3

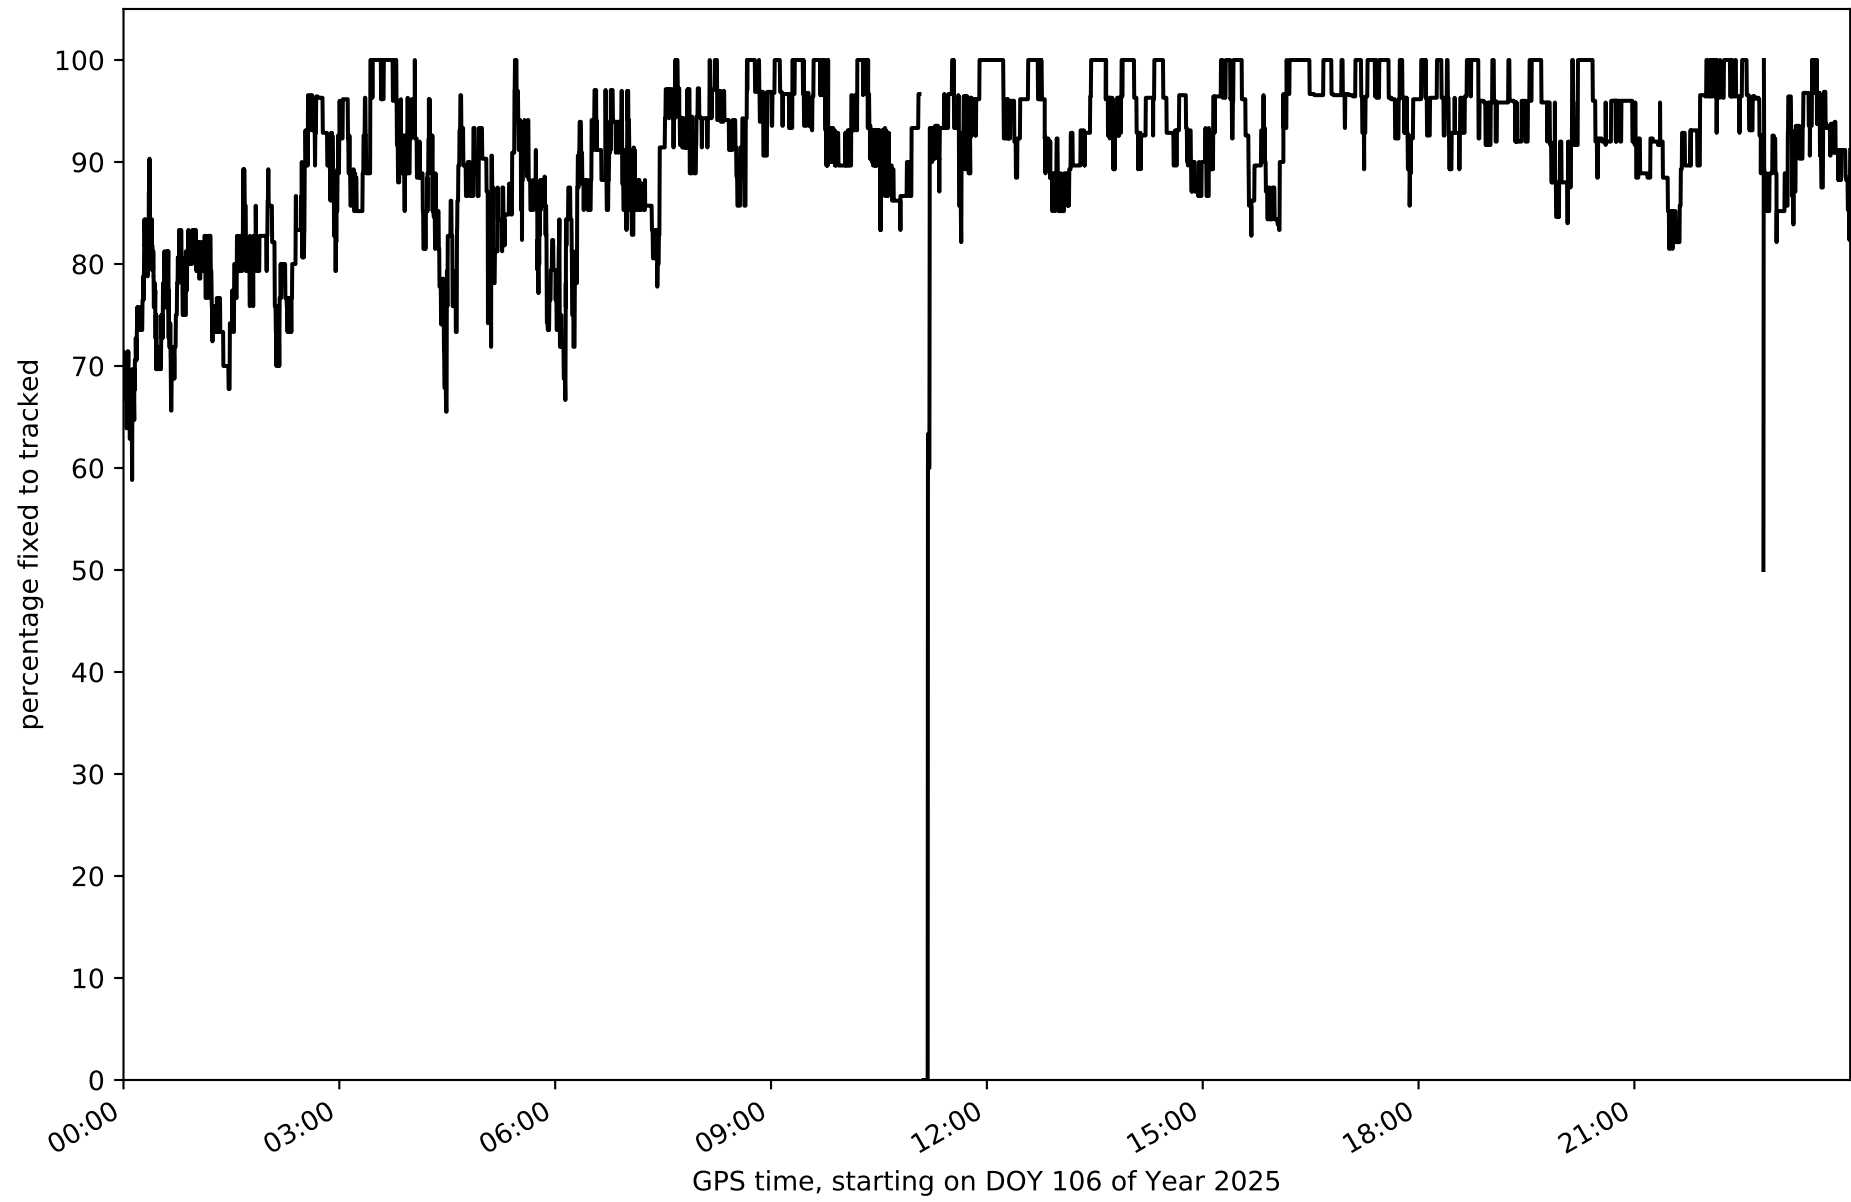


Network N32T - only GPS with threshold set to 0.3

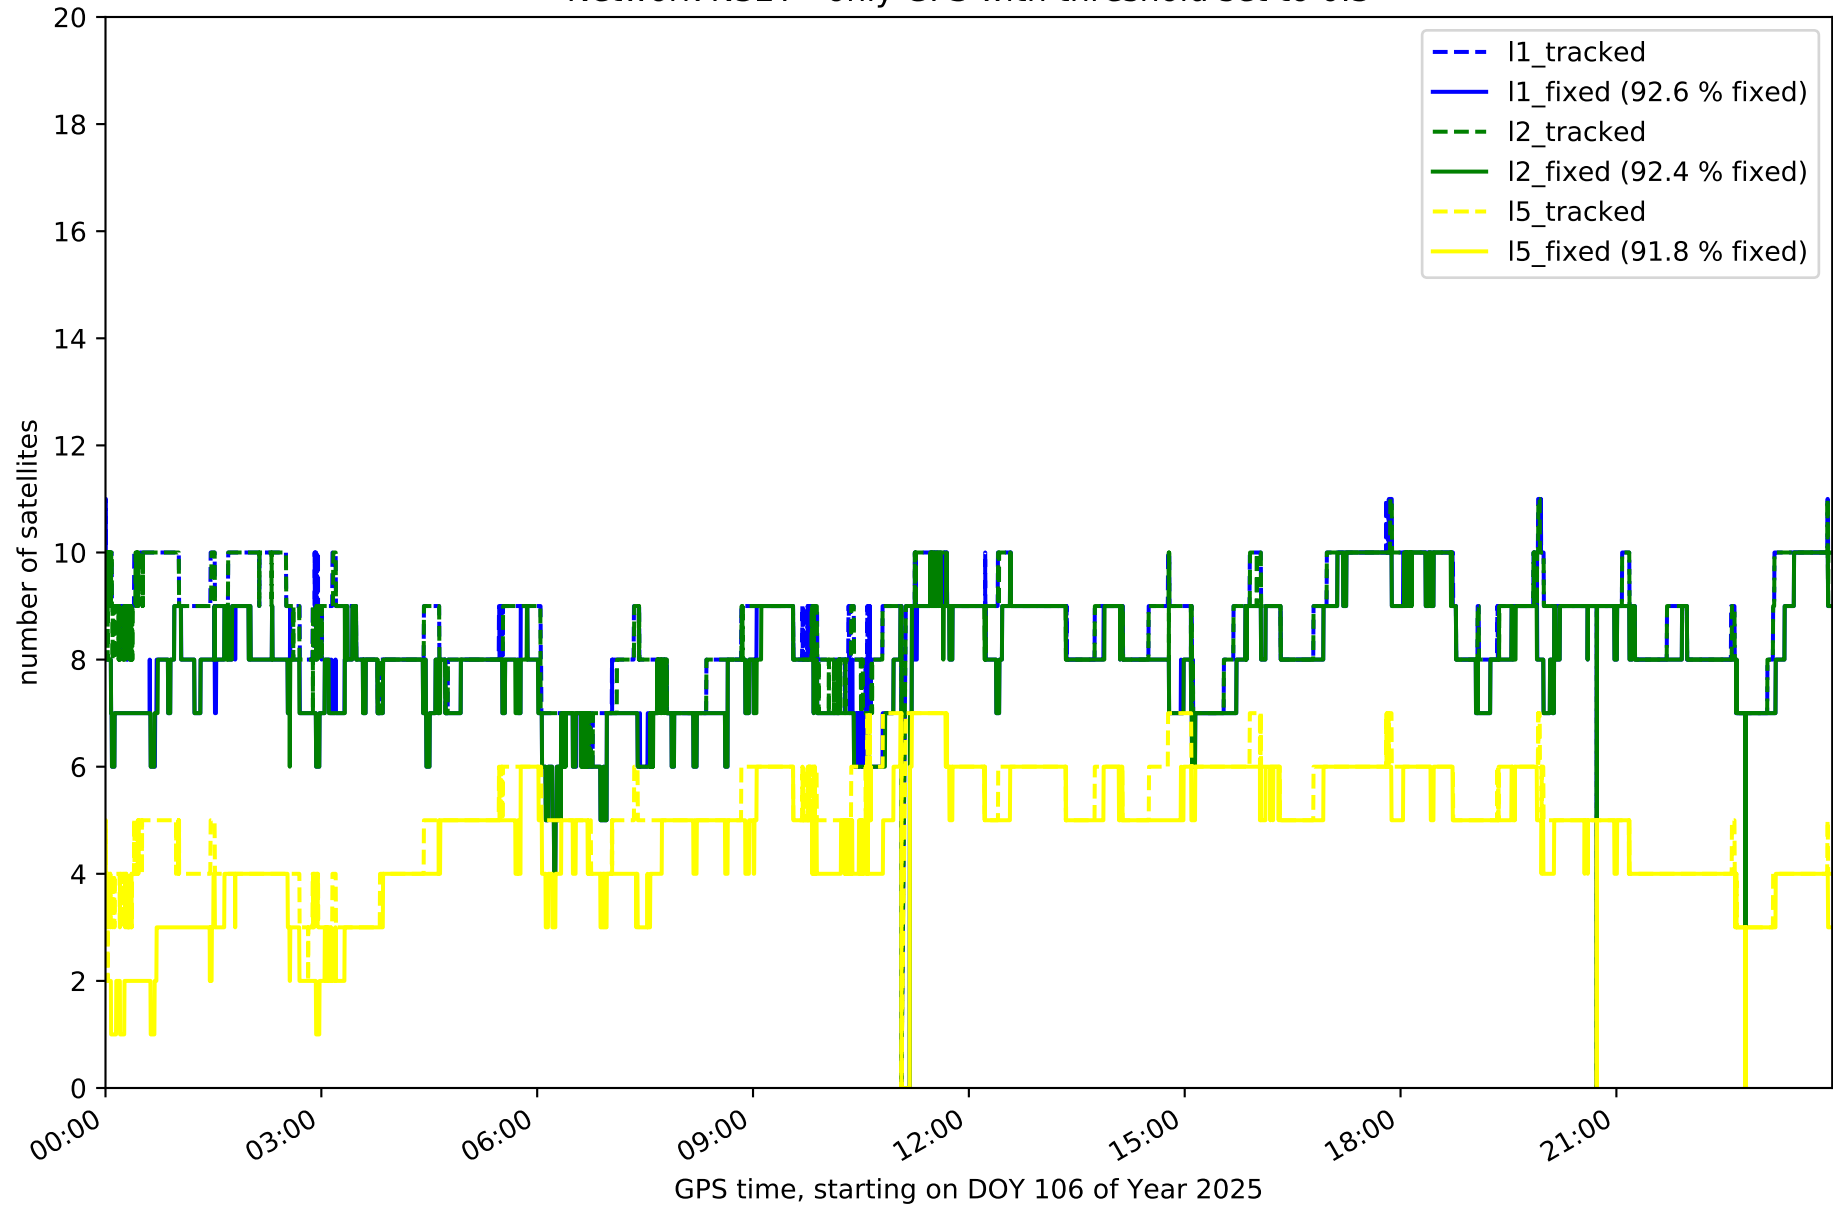


Network N32T - only GLONASS with threshold set to 0.3

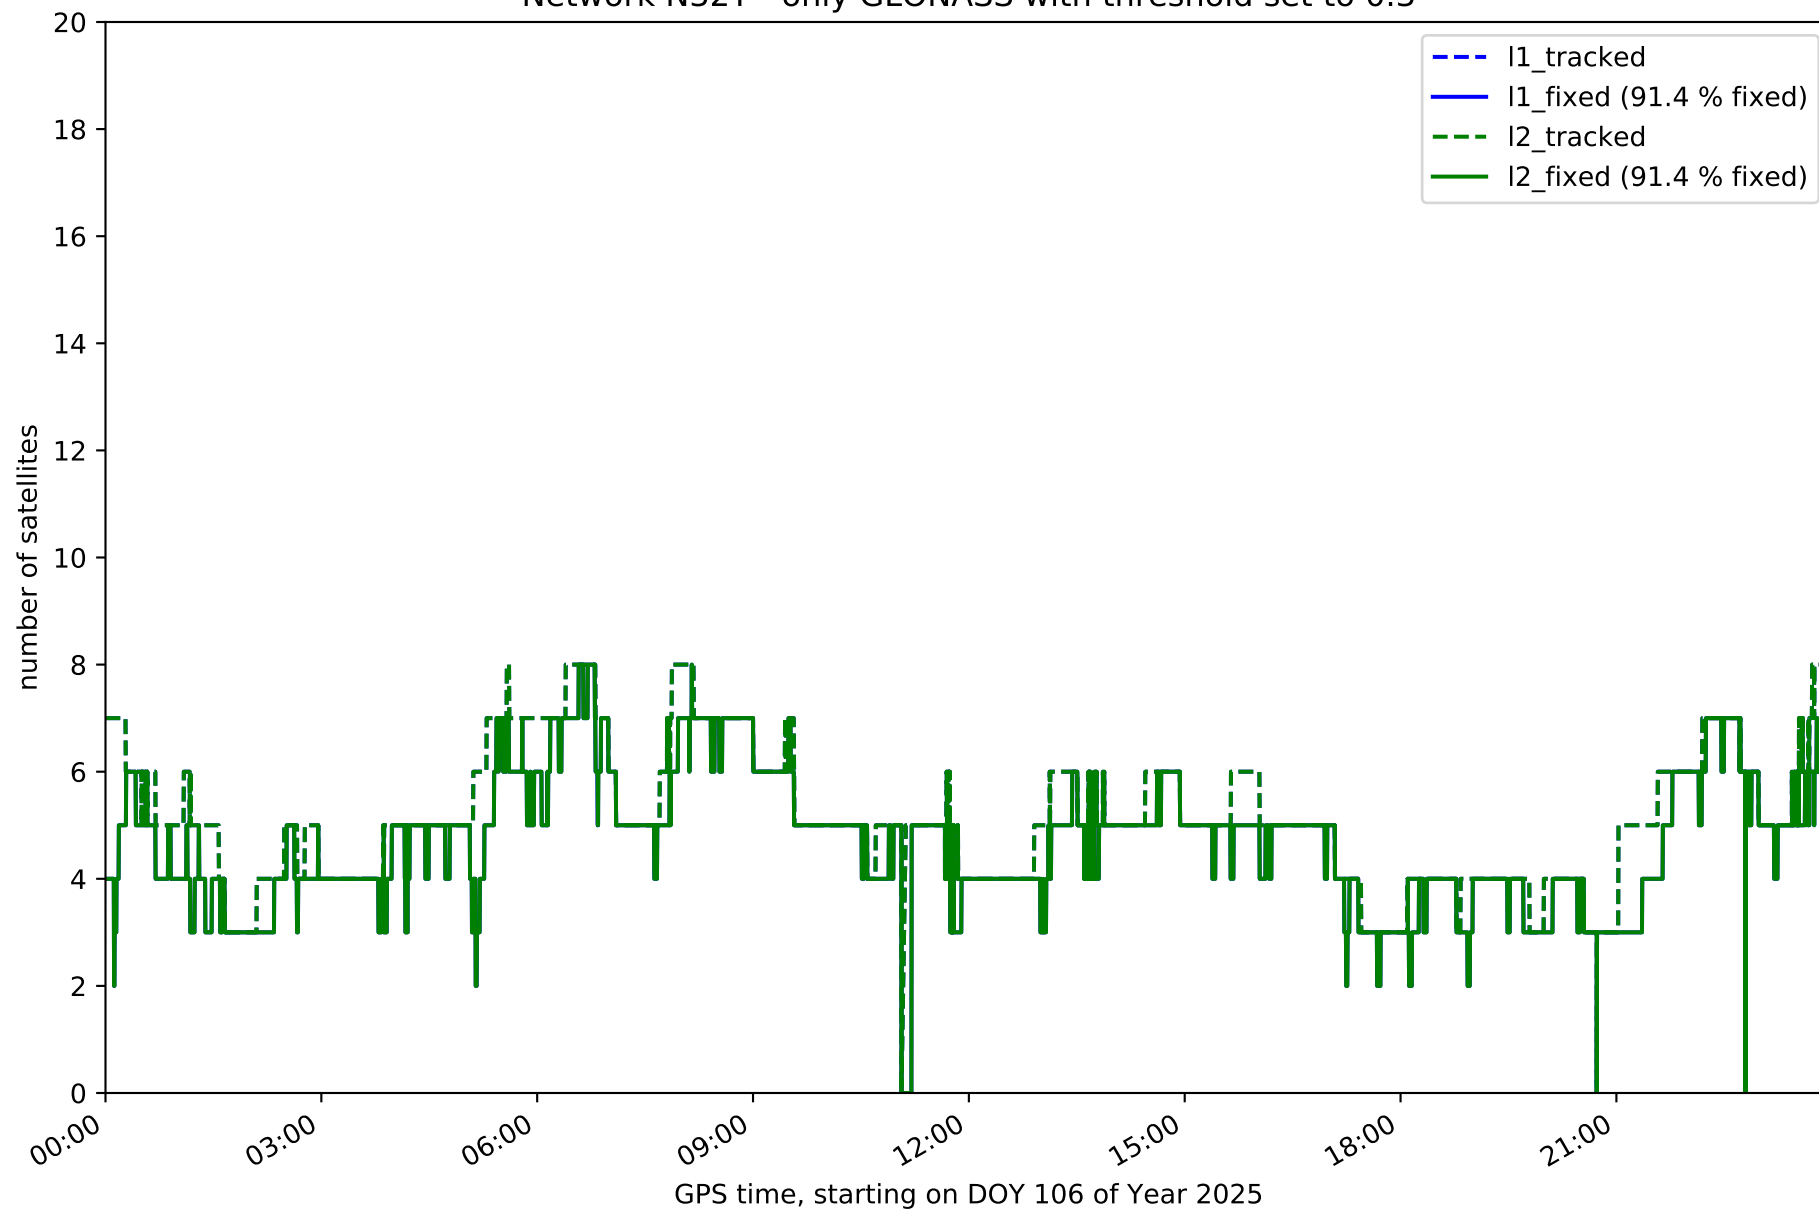


Network N32T - only BDS with threshold set to 0.3

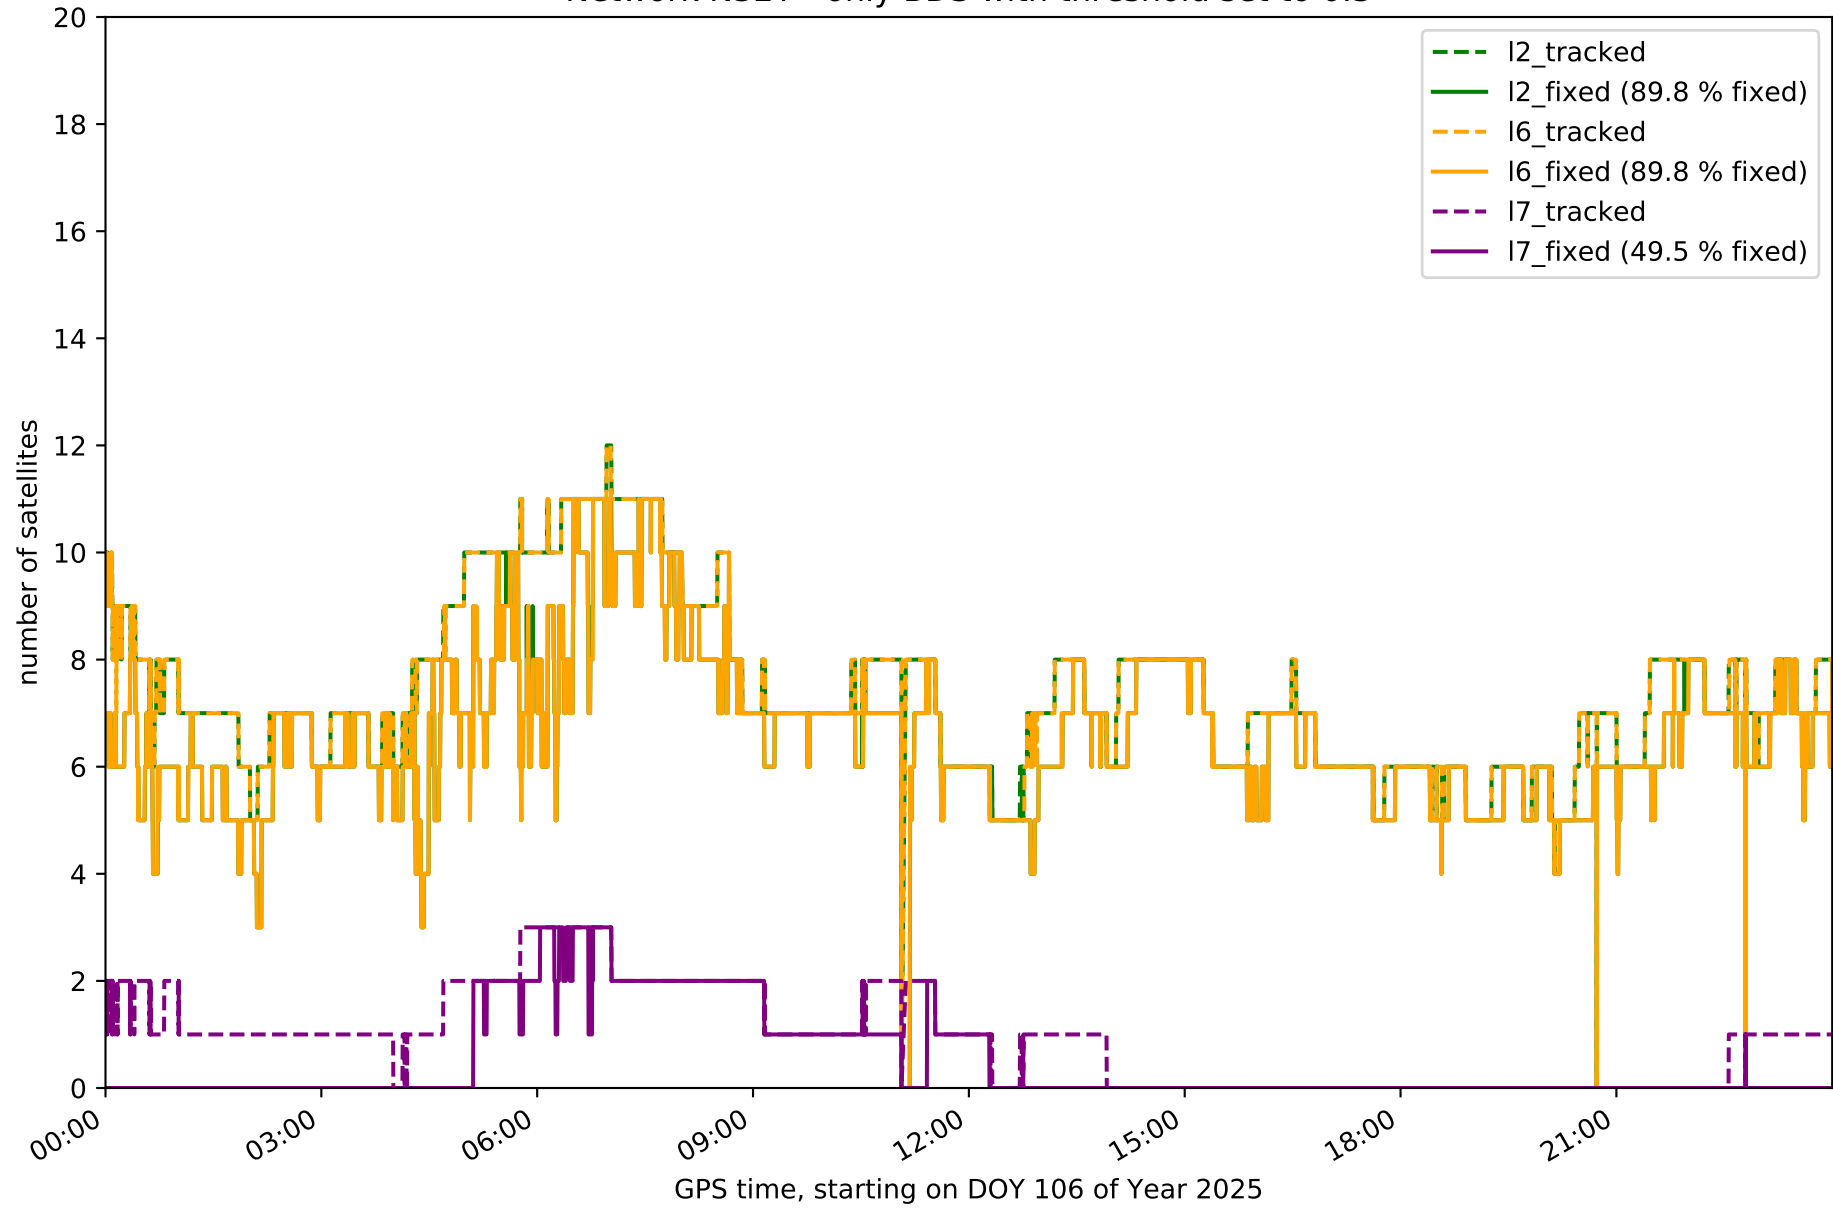


Network N32T - only Galileo with threshold set to 0.3

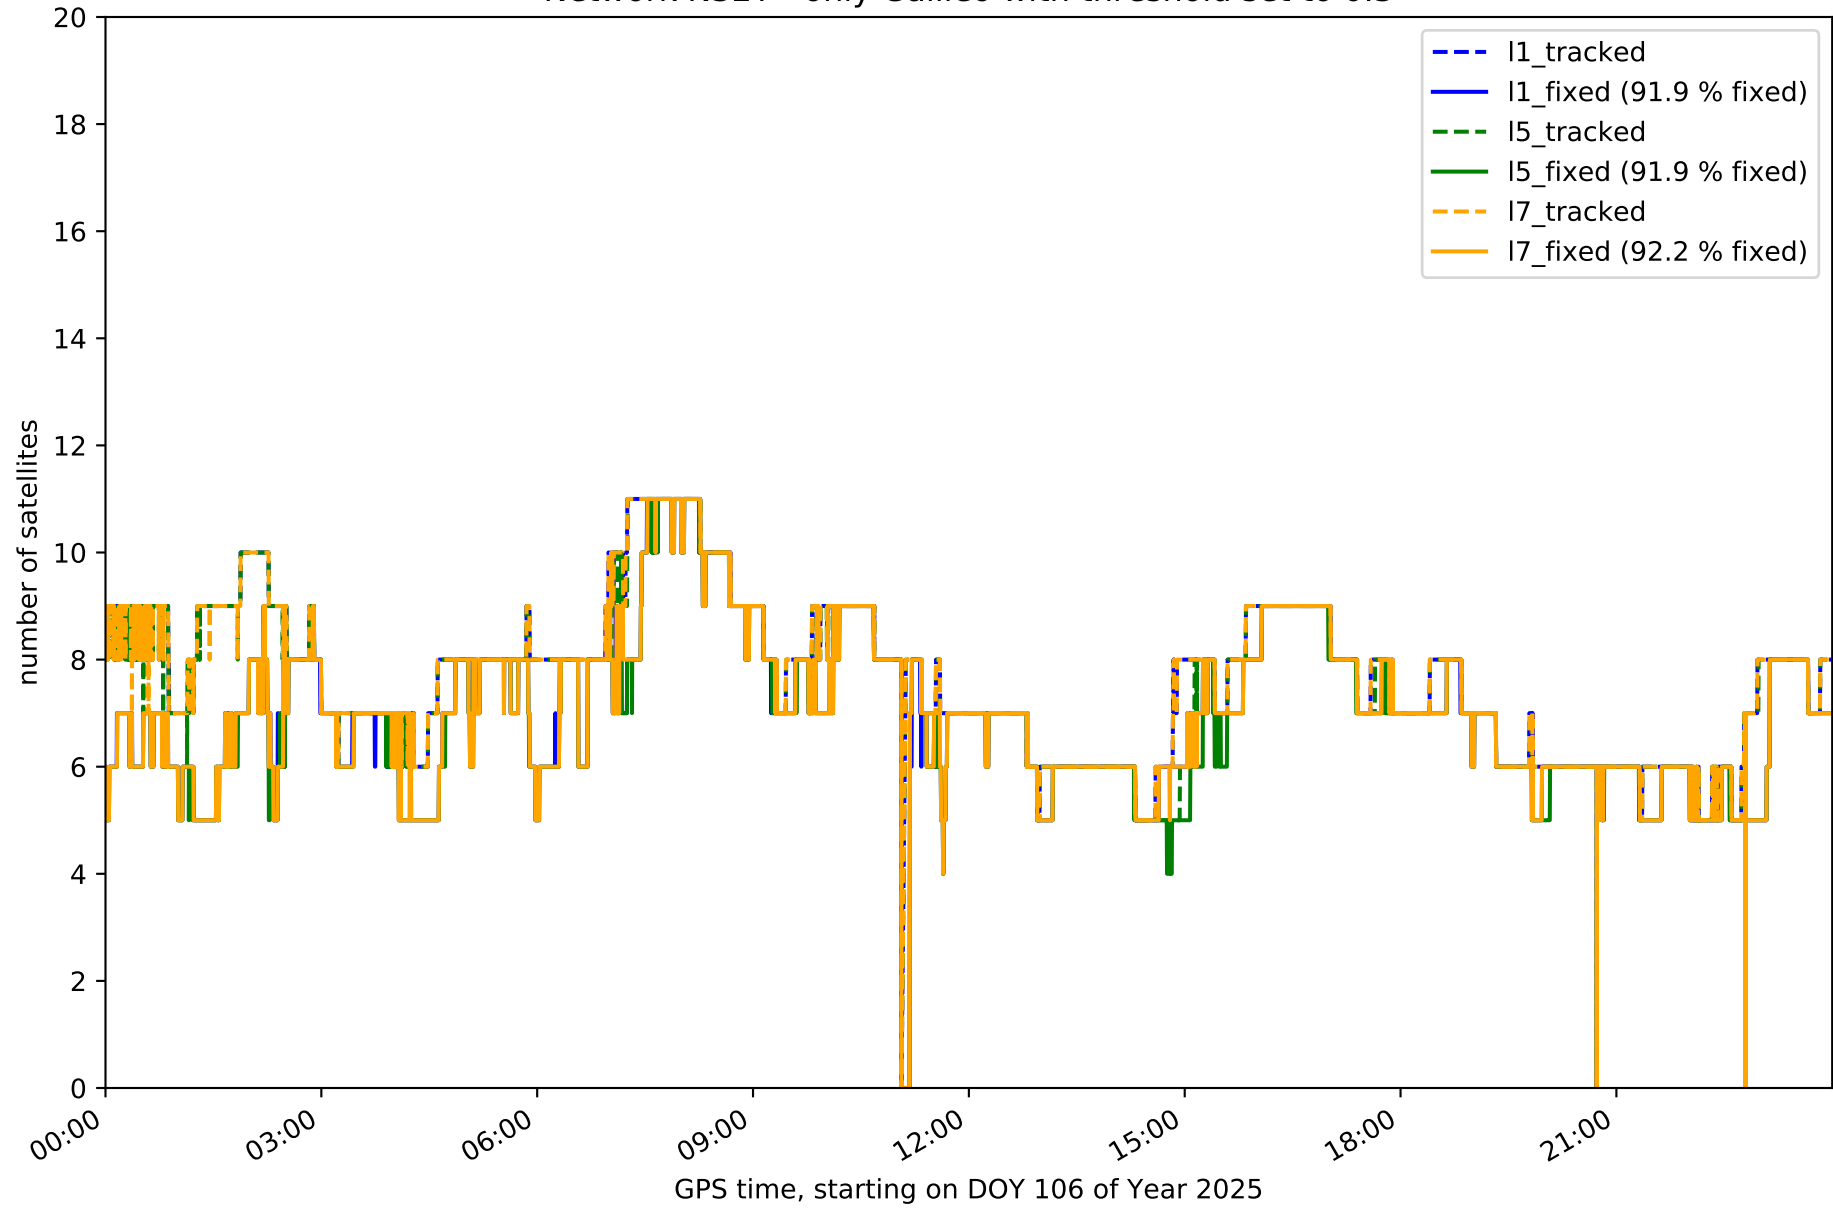


Station EH01 in network N32T

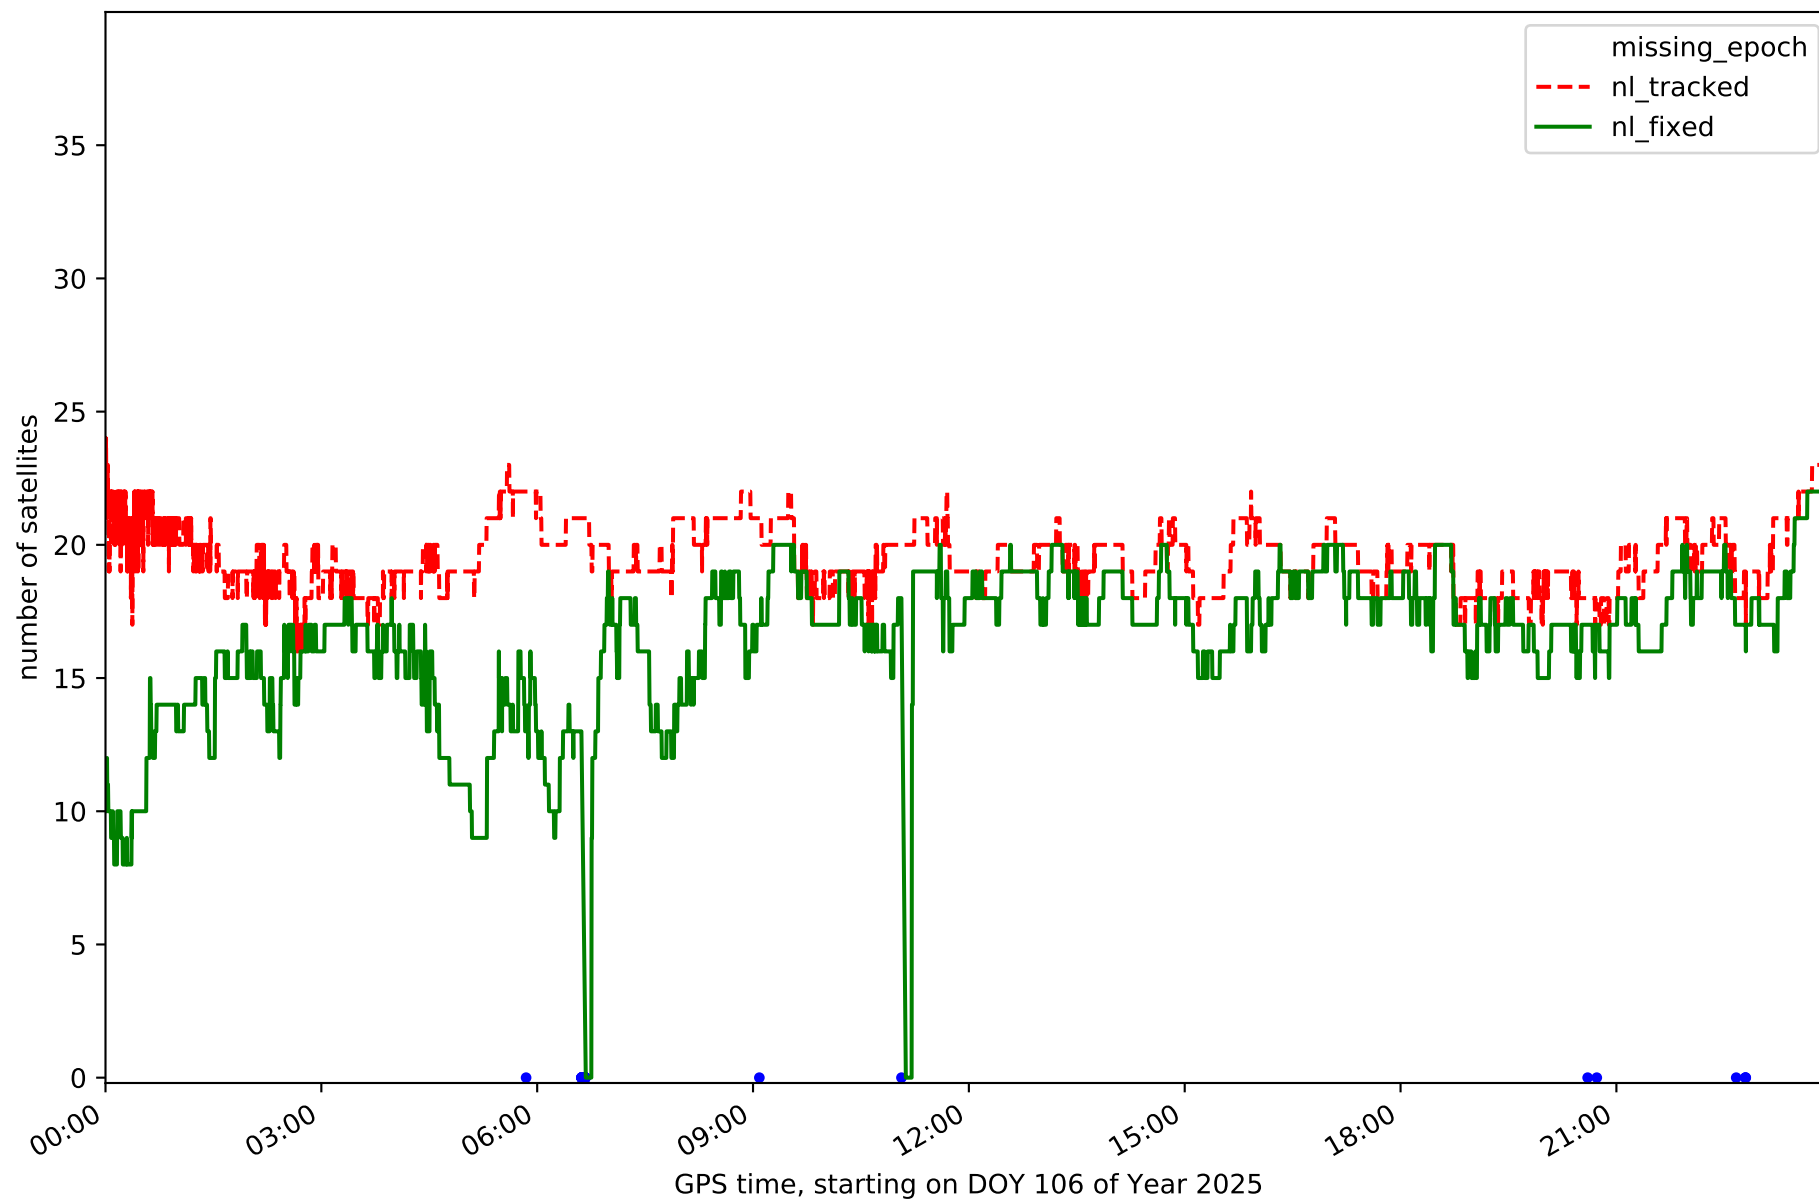


Station EH02 in network N32T

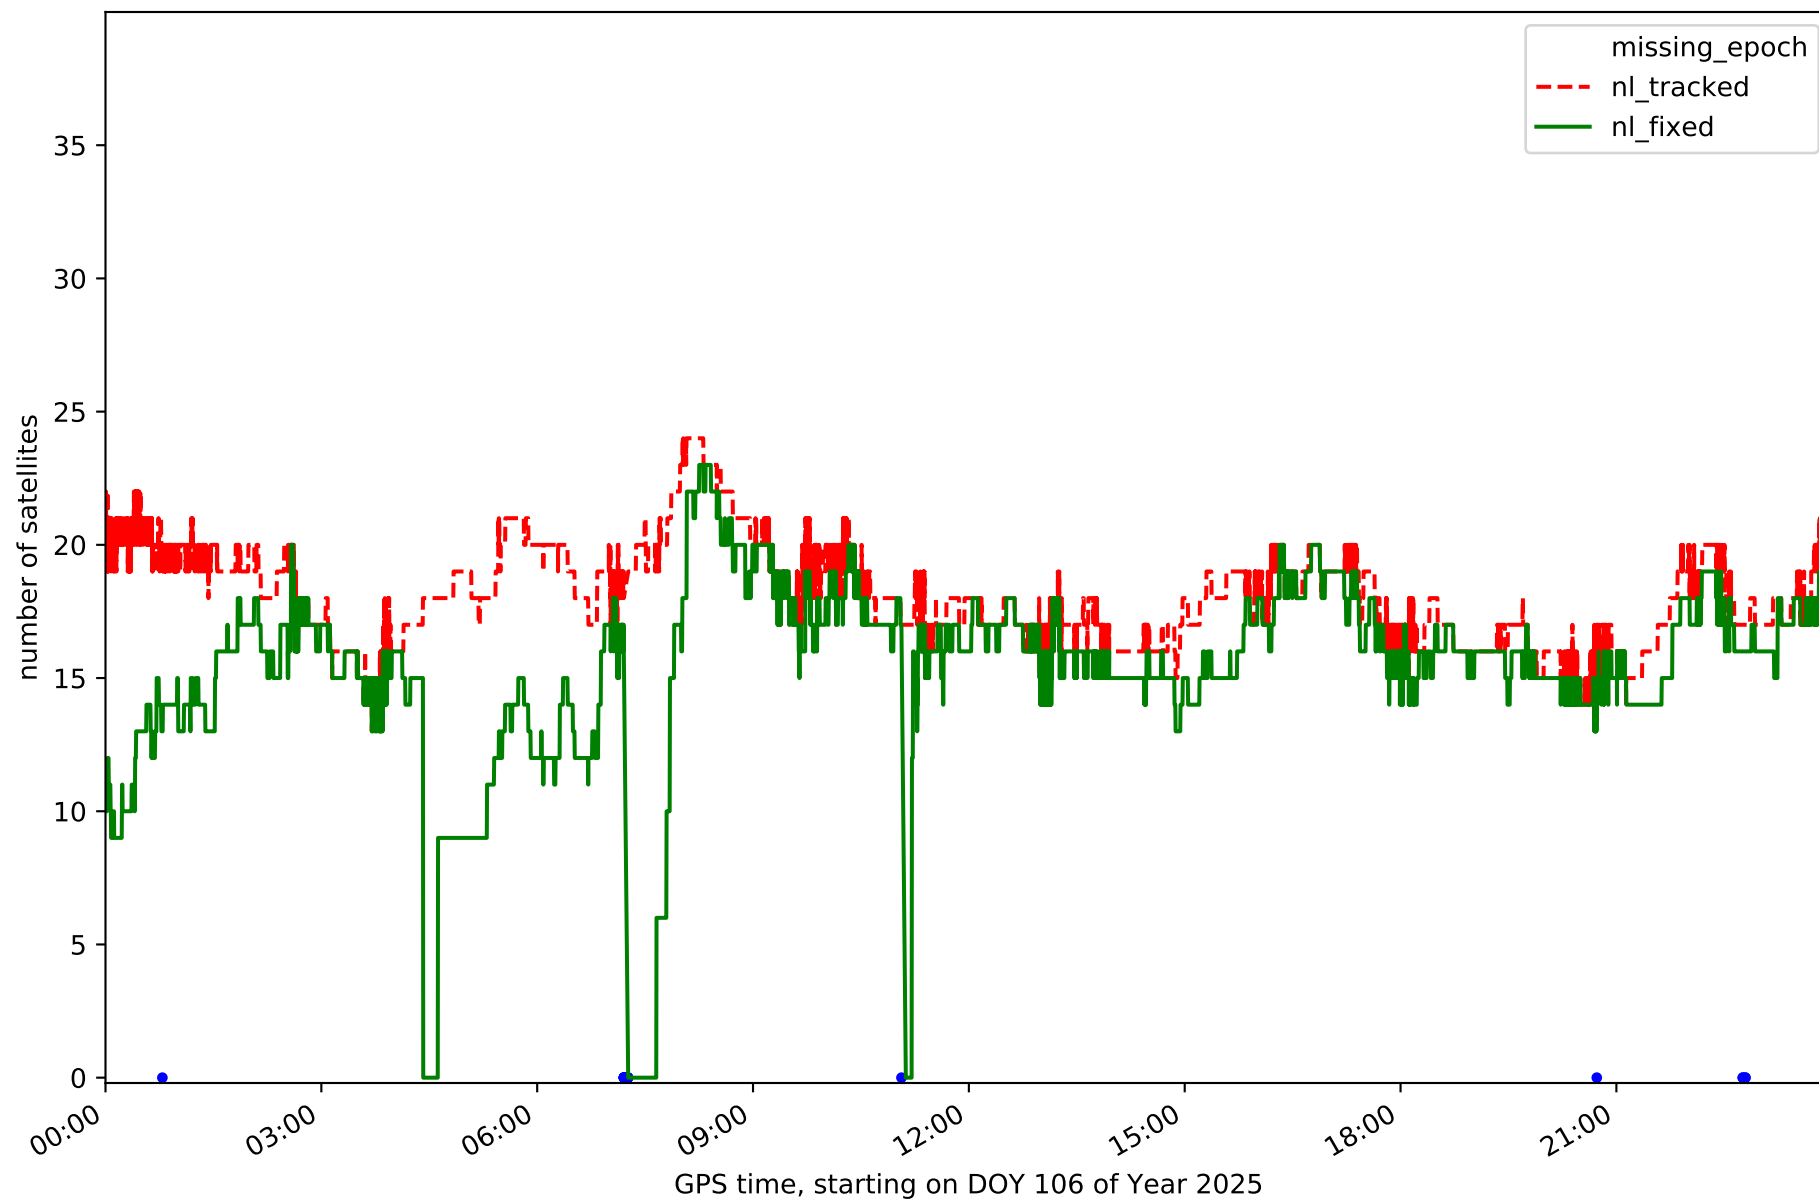


Station GOM1 in network N32T

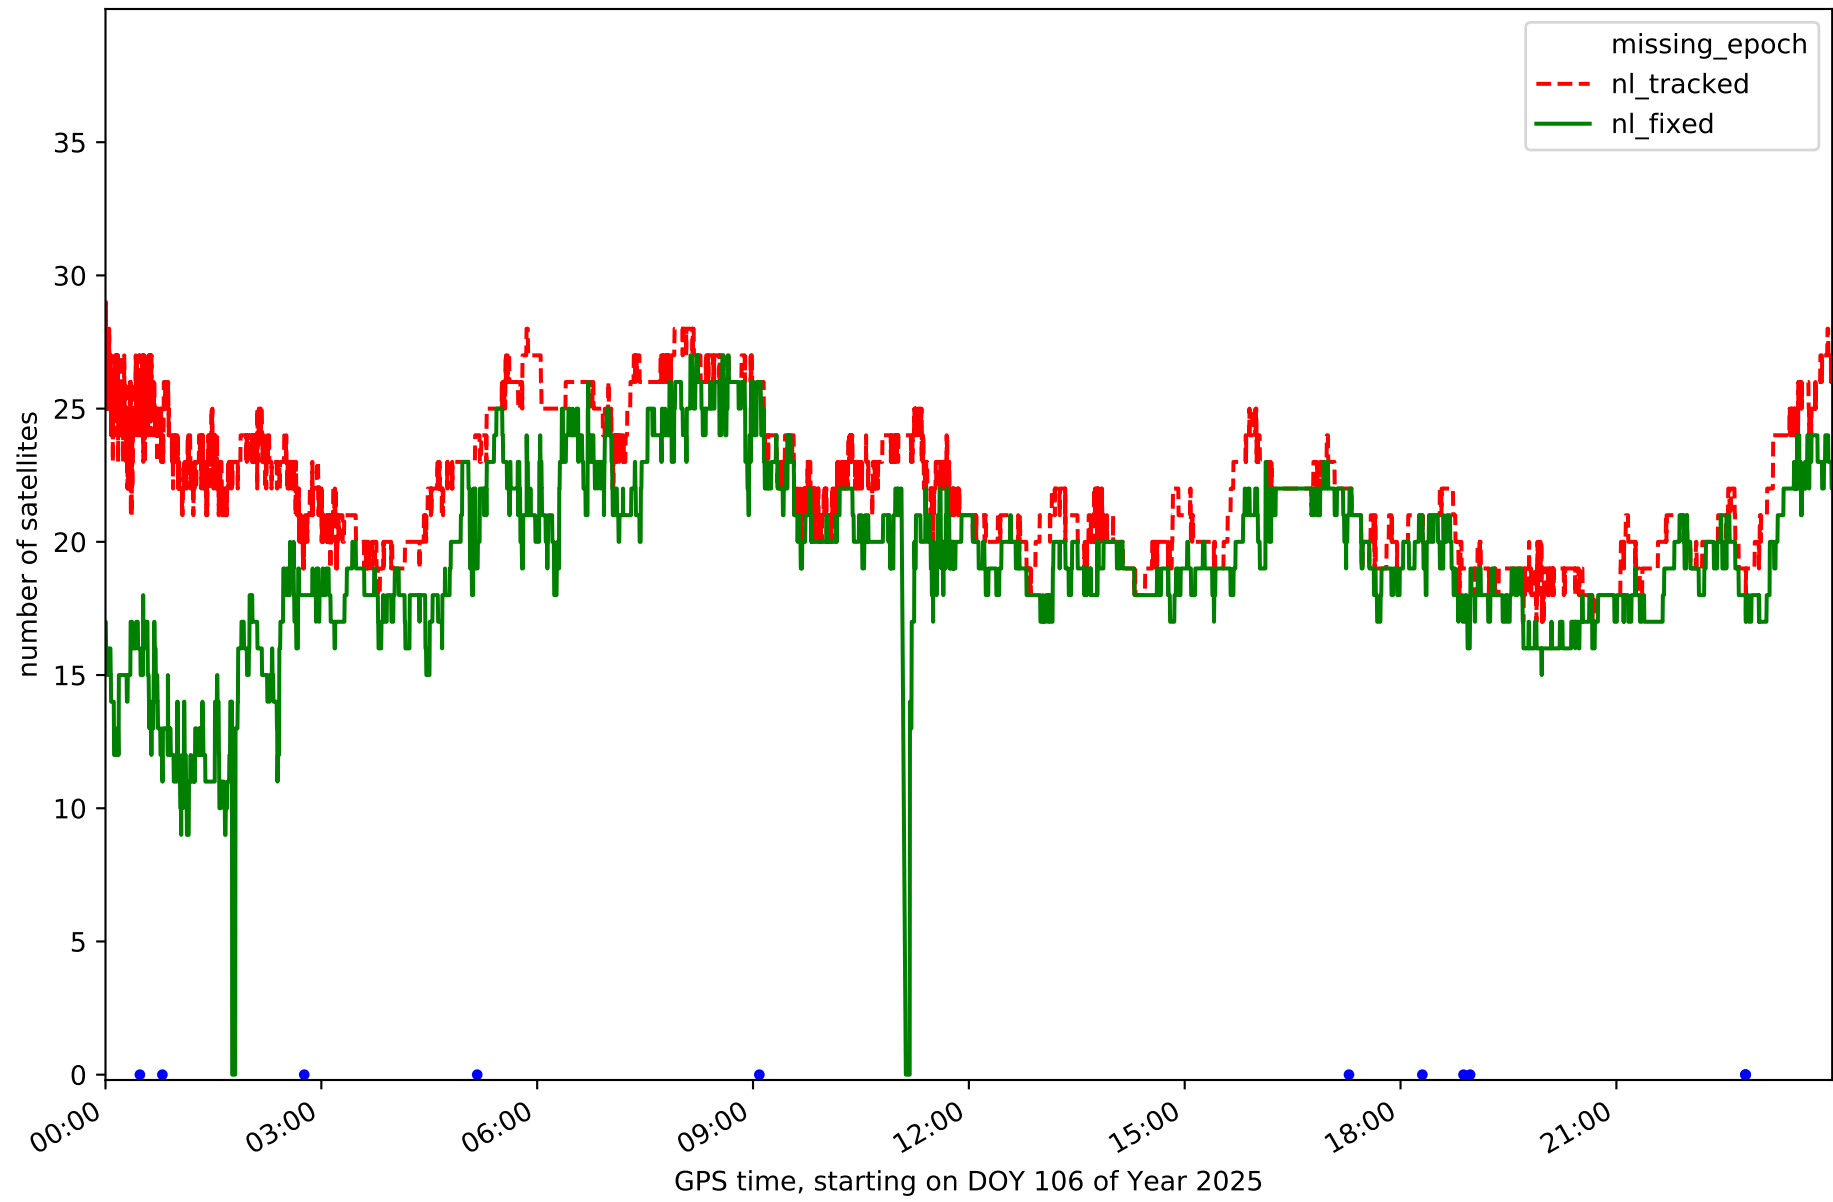


Station IZAN in network N32T

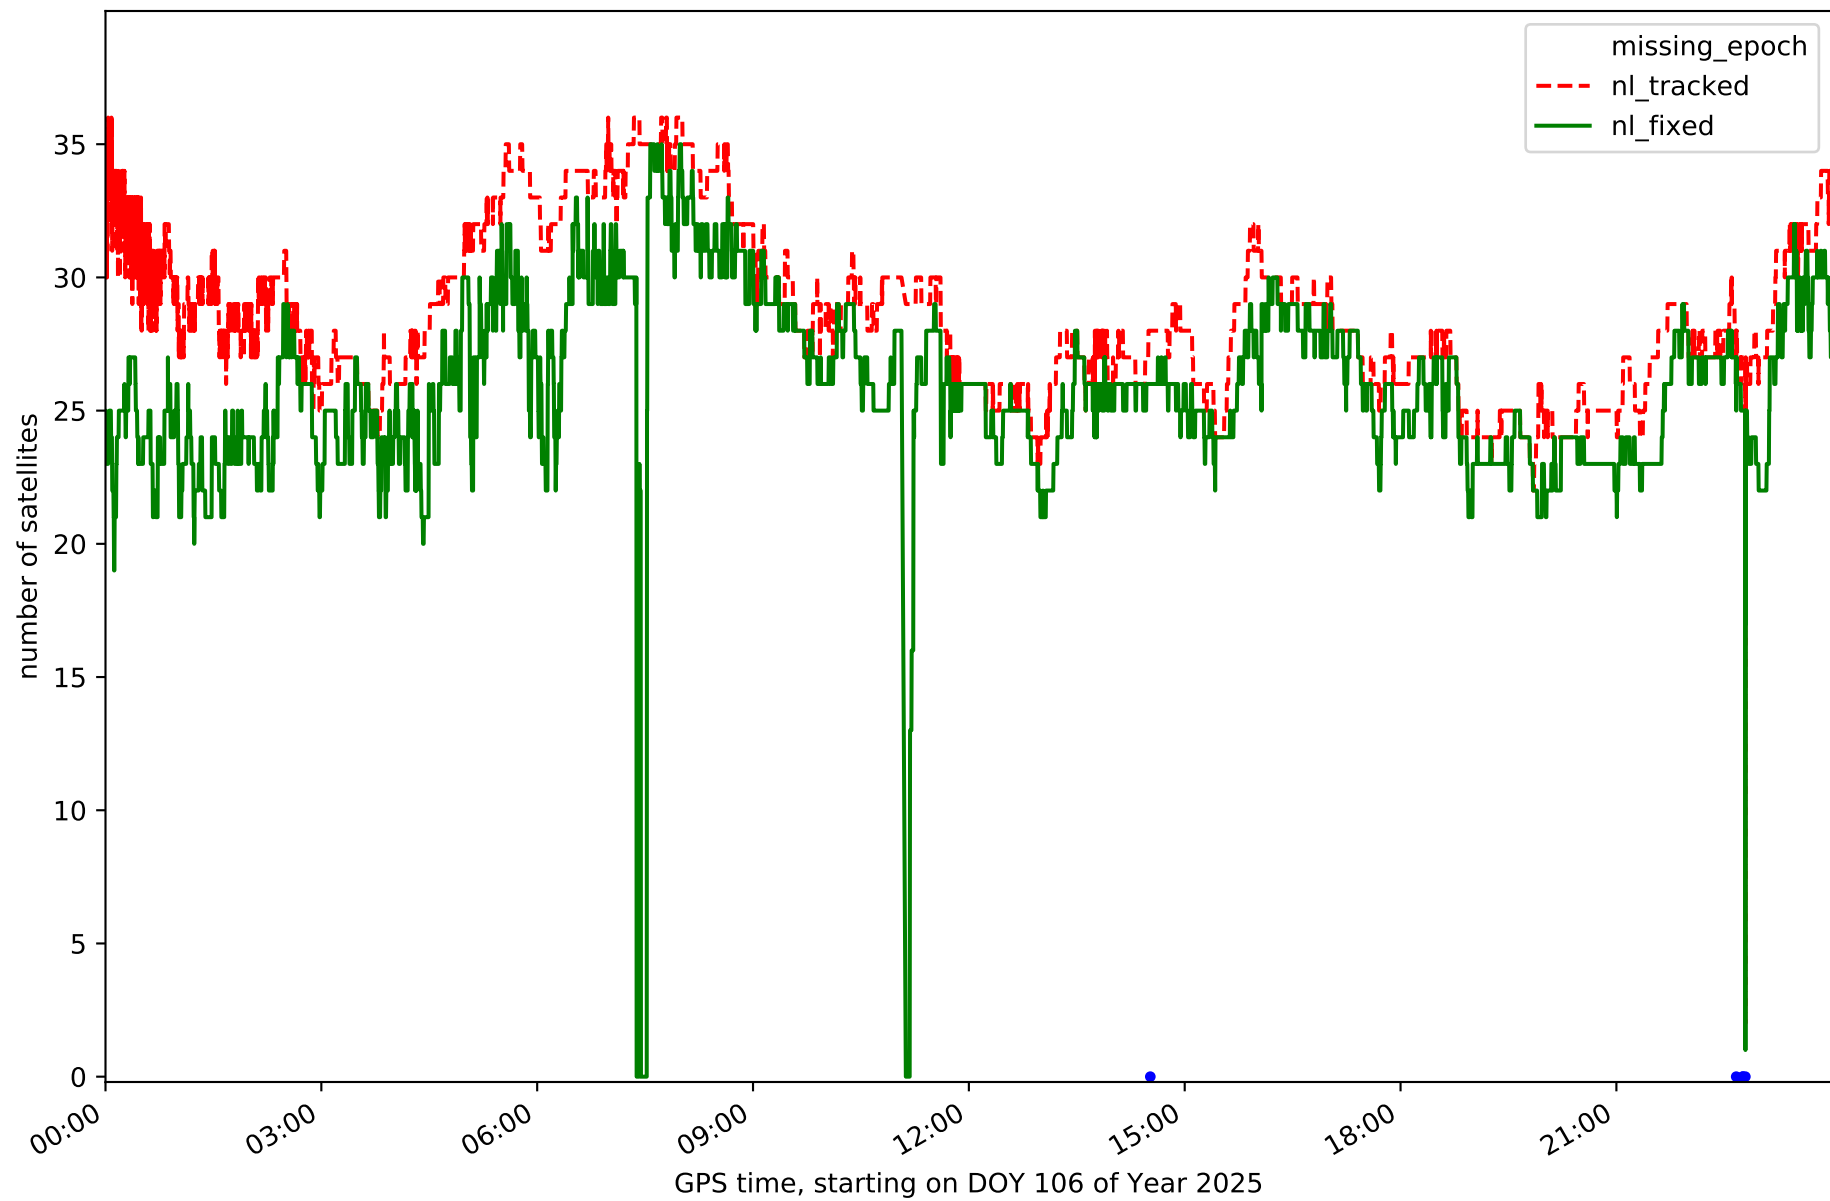


Station LP01 in network N32T

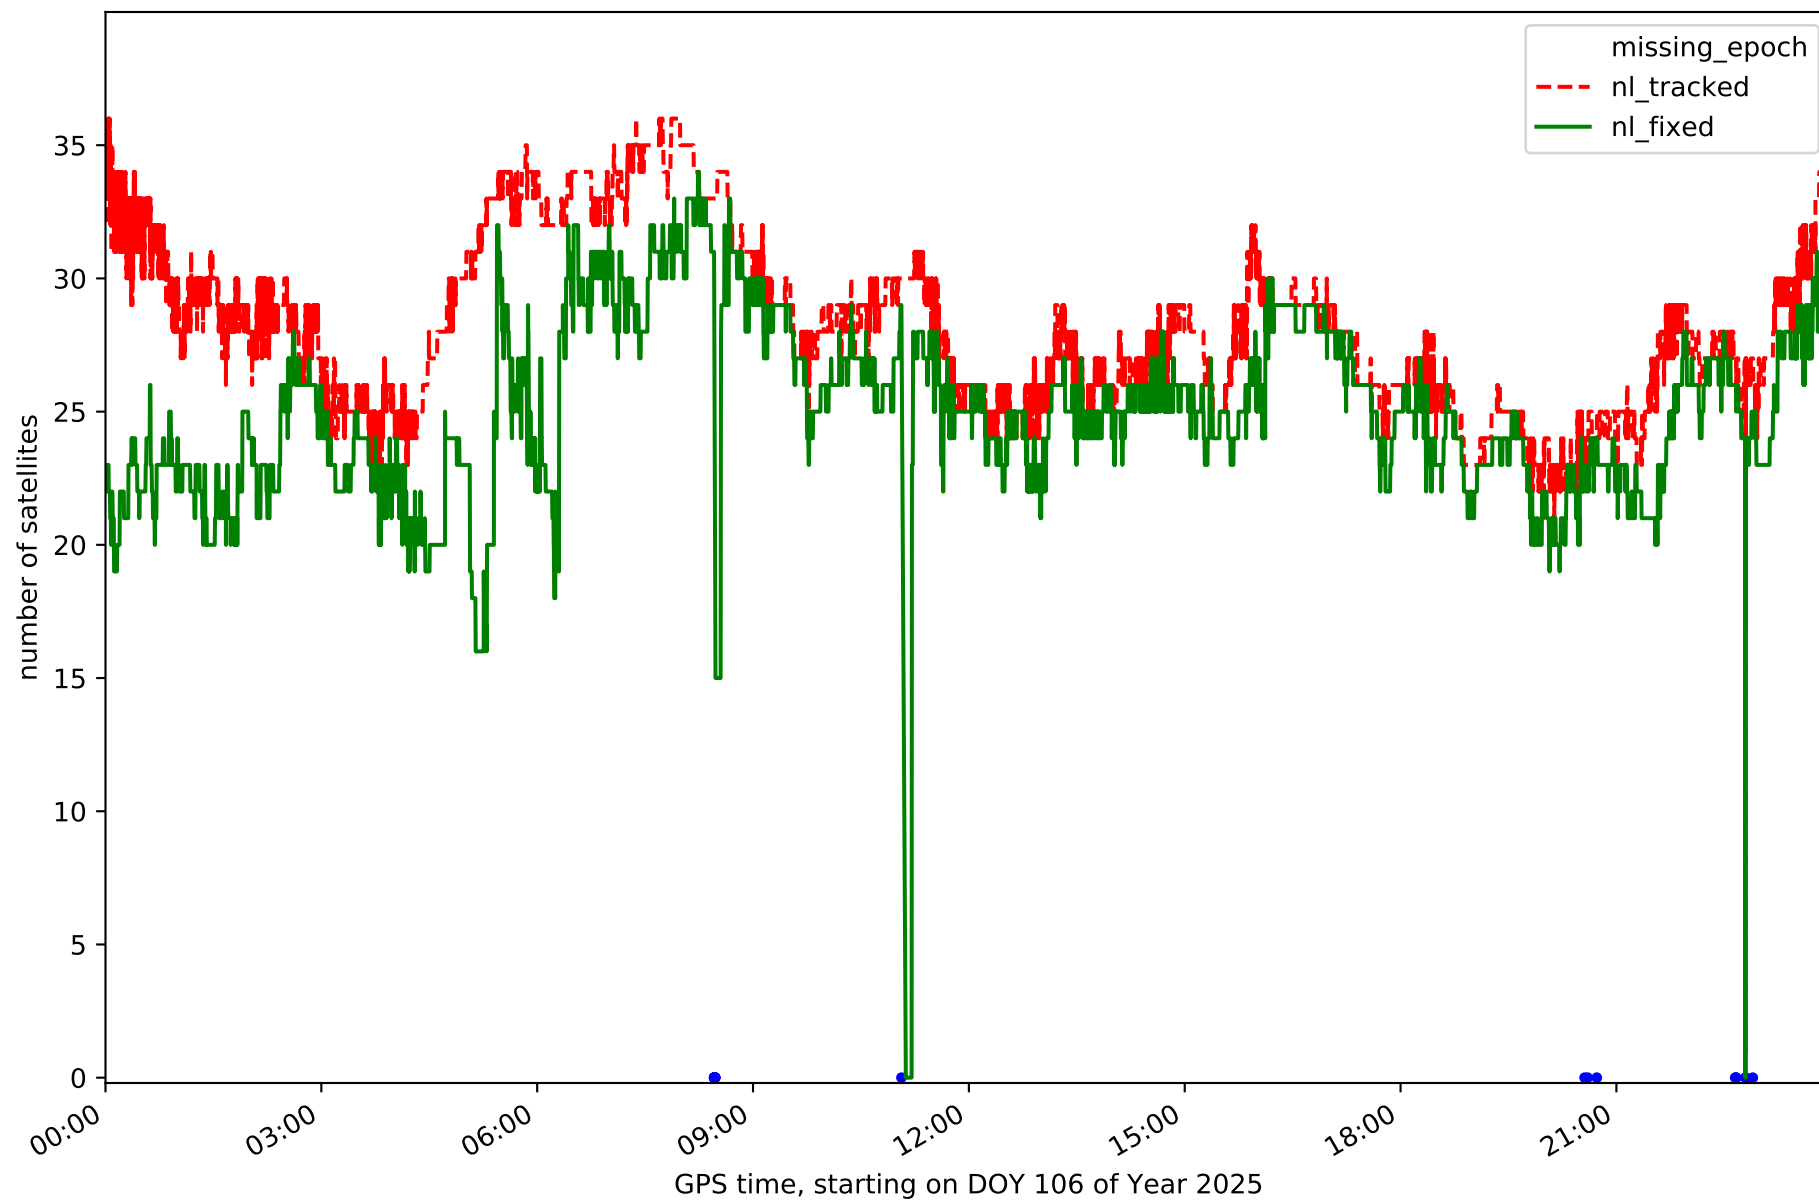


Station LP03 in network N32T

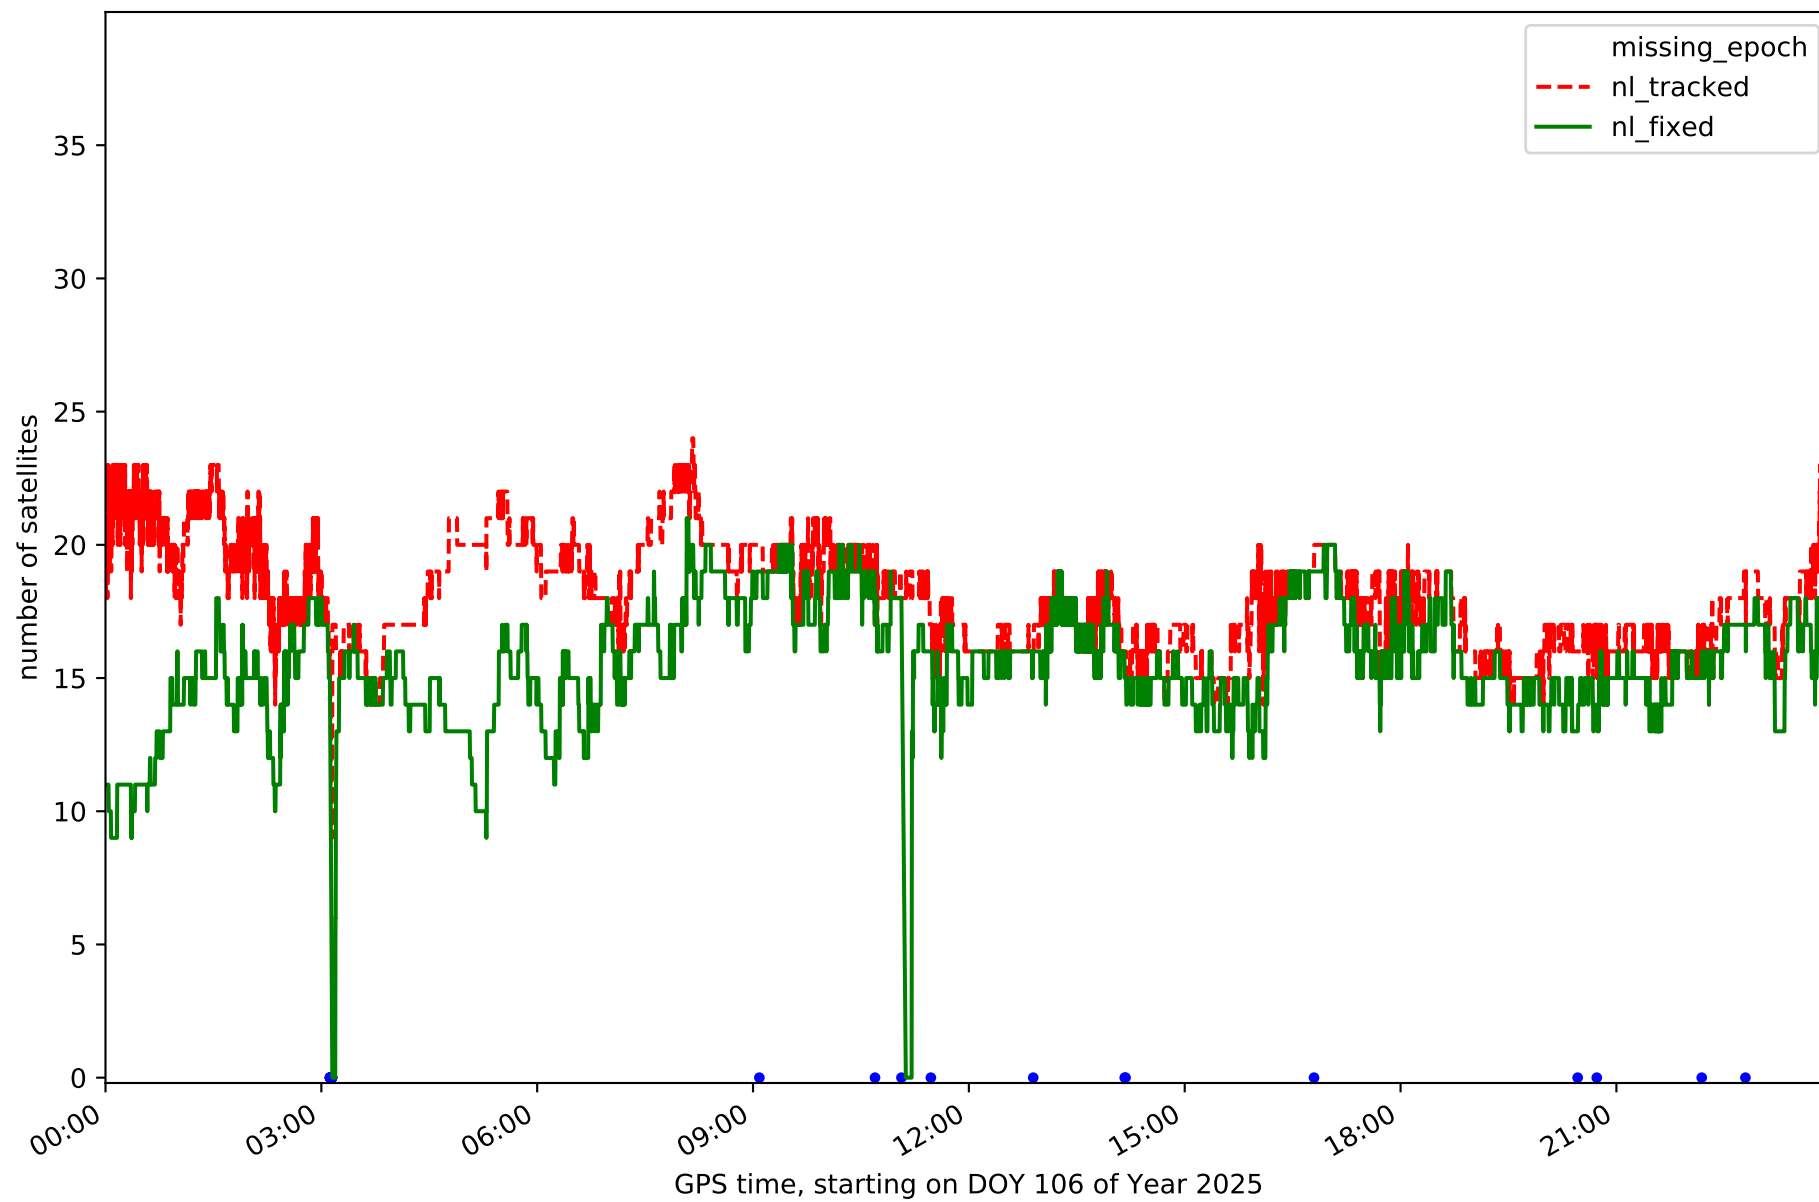


Station LPAL in network N32T

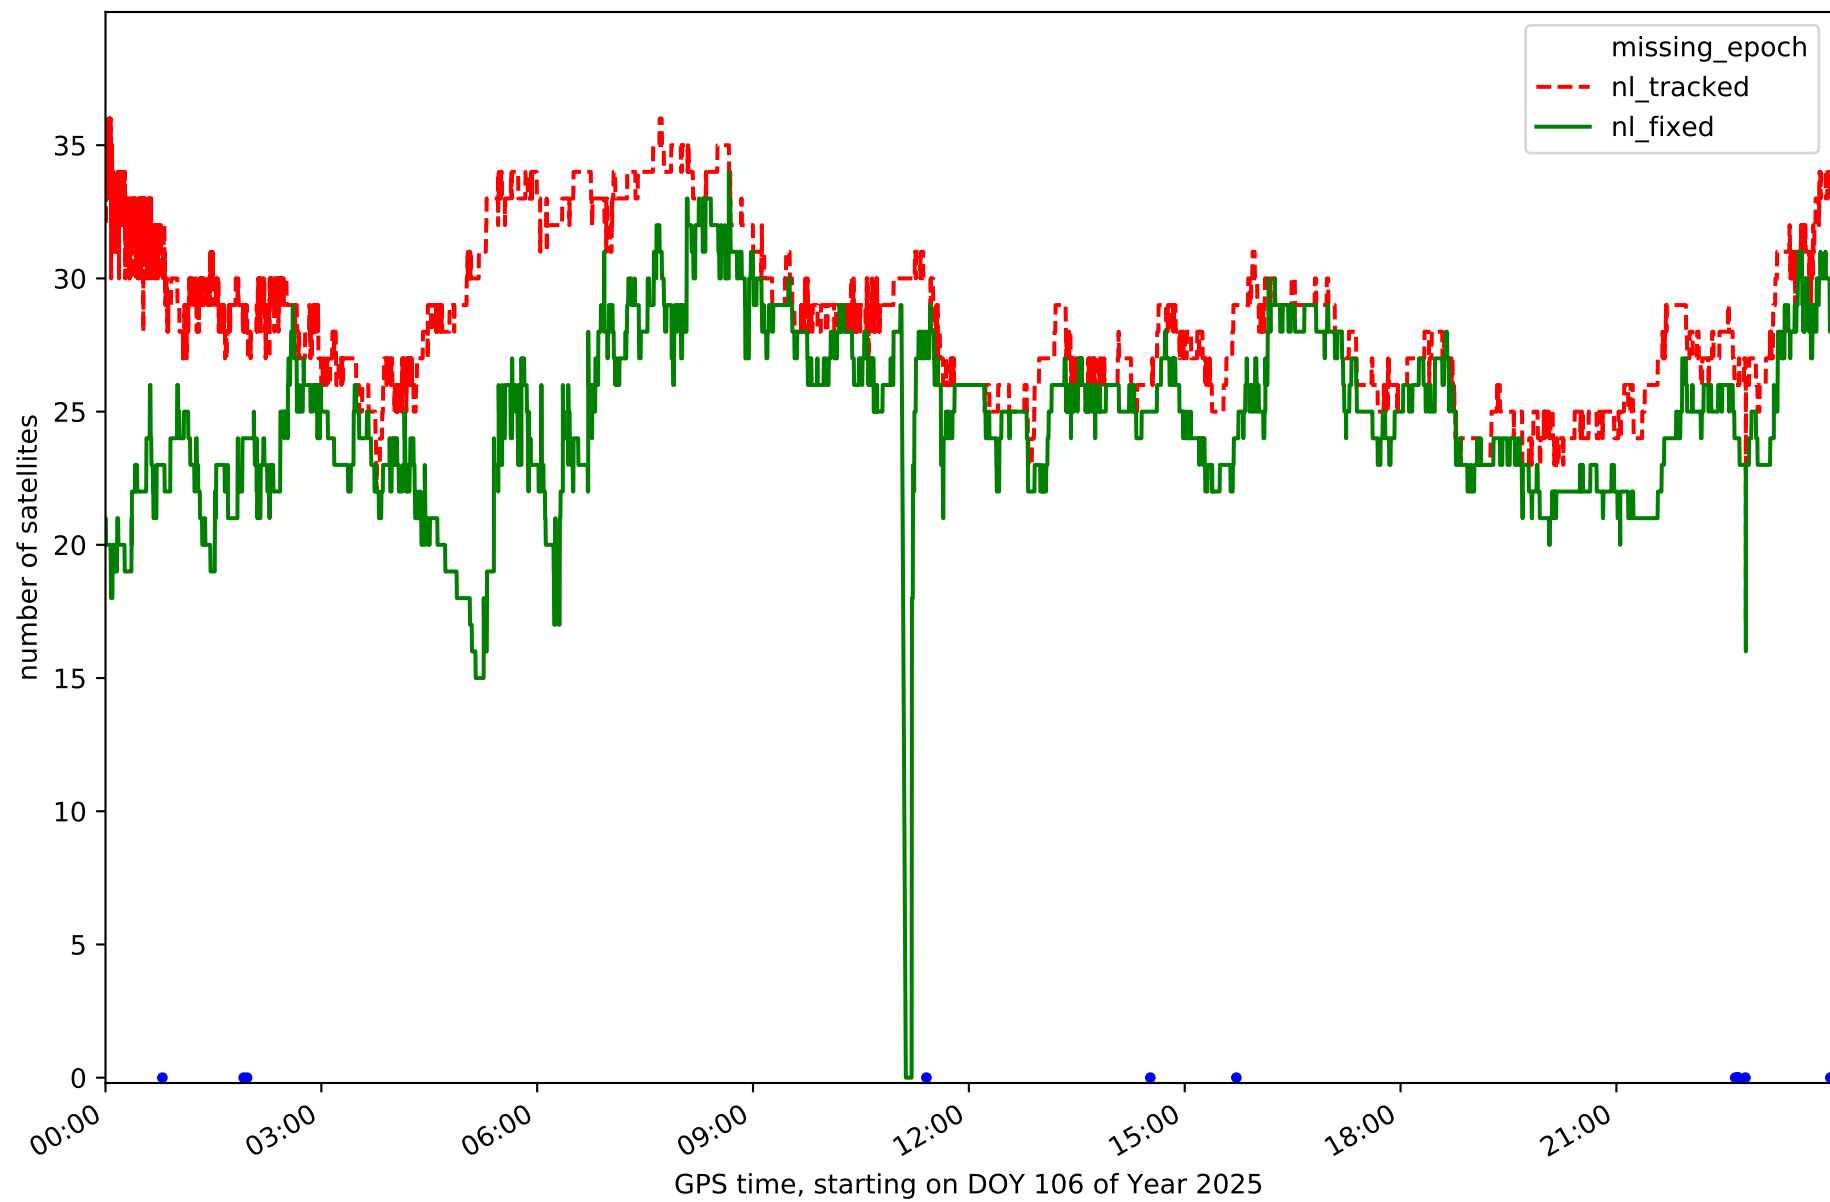


Station LRES in network N32T

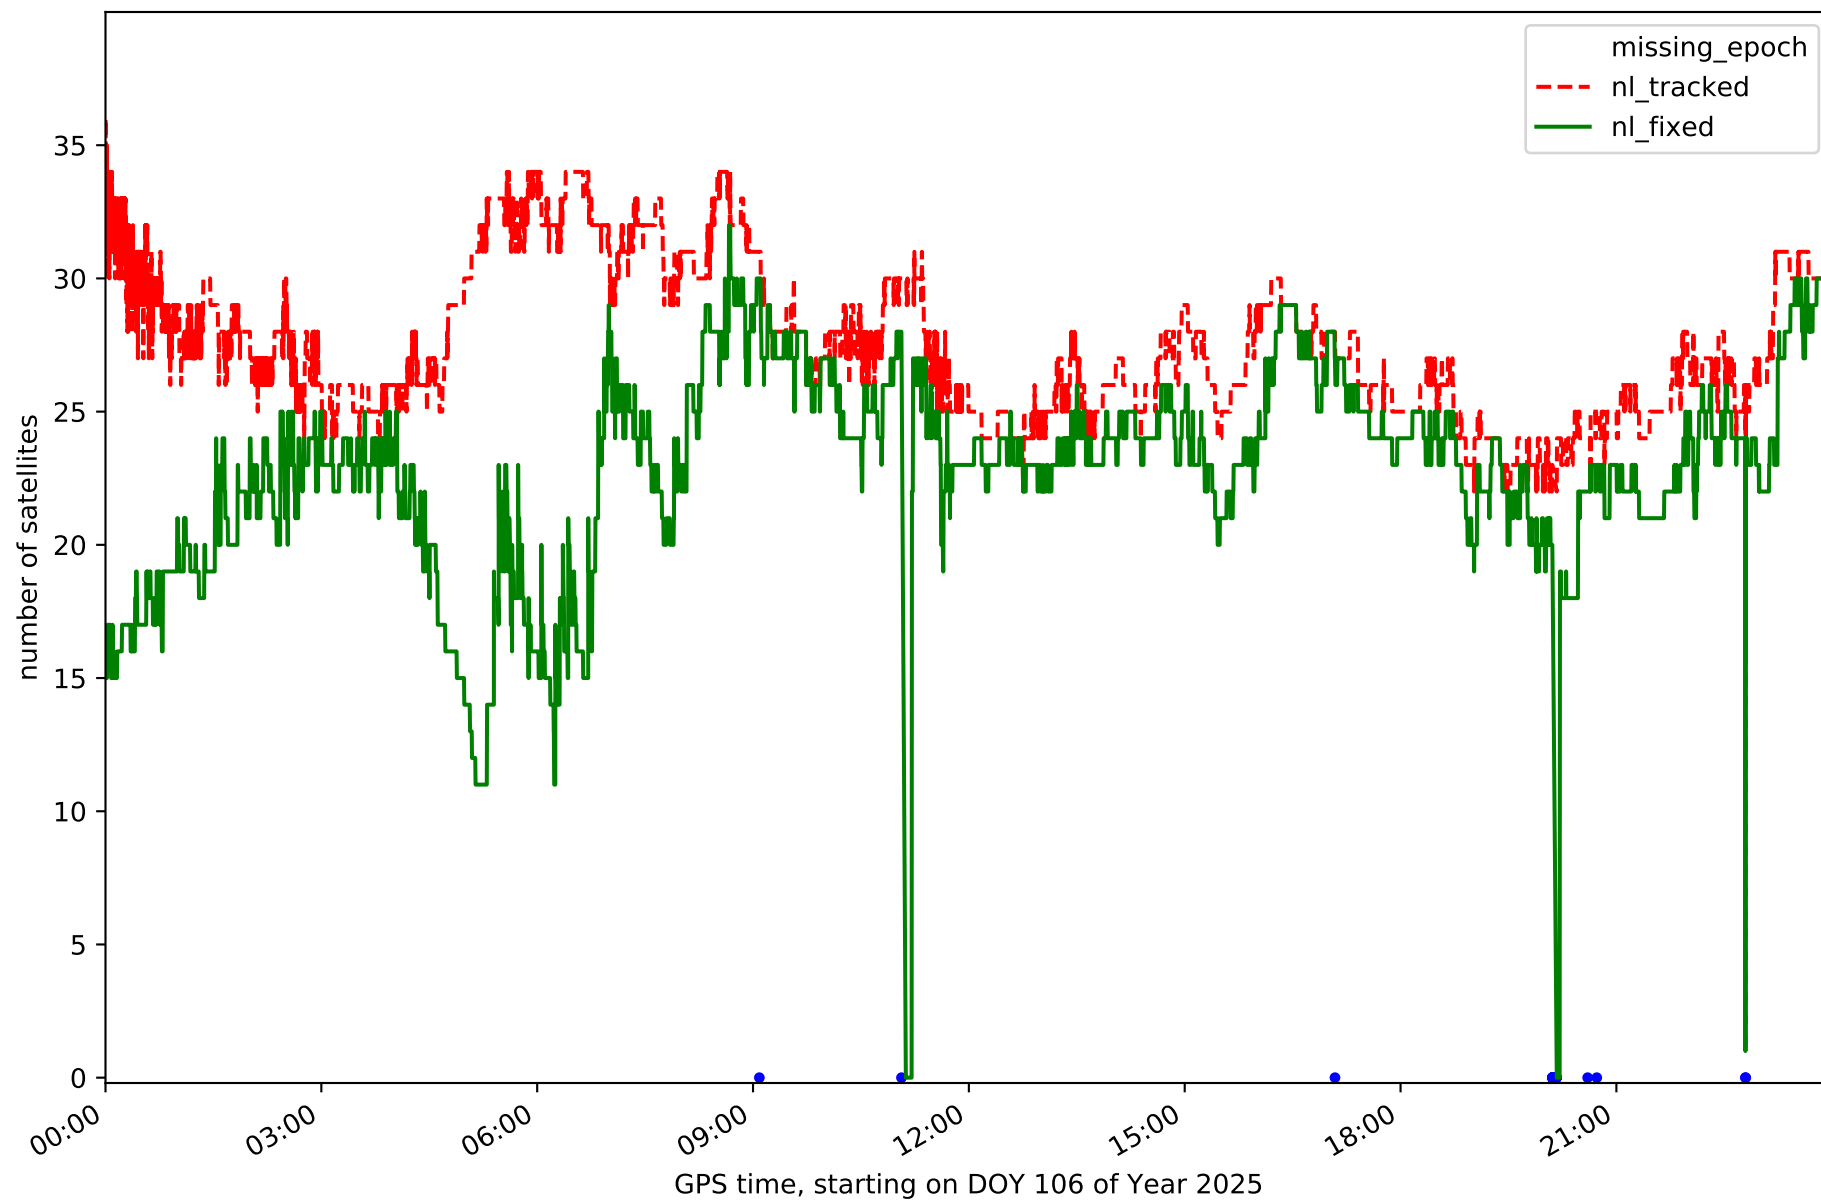


Station TN01 in network N32T

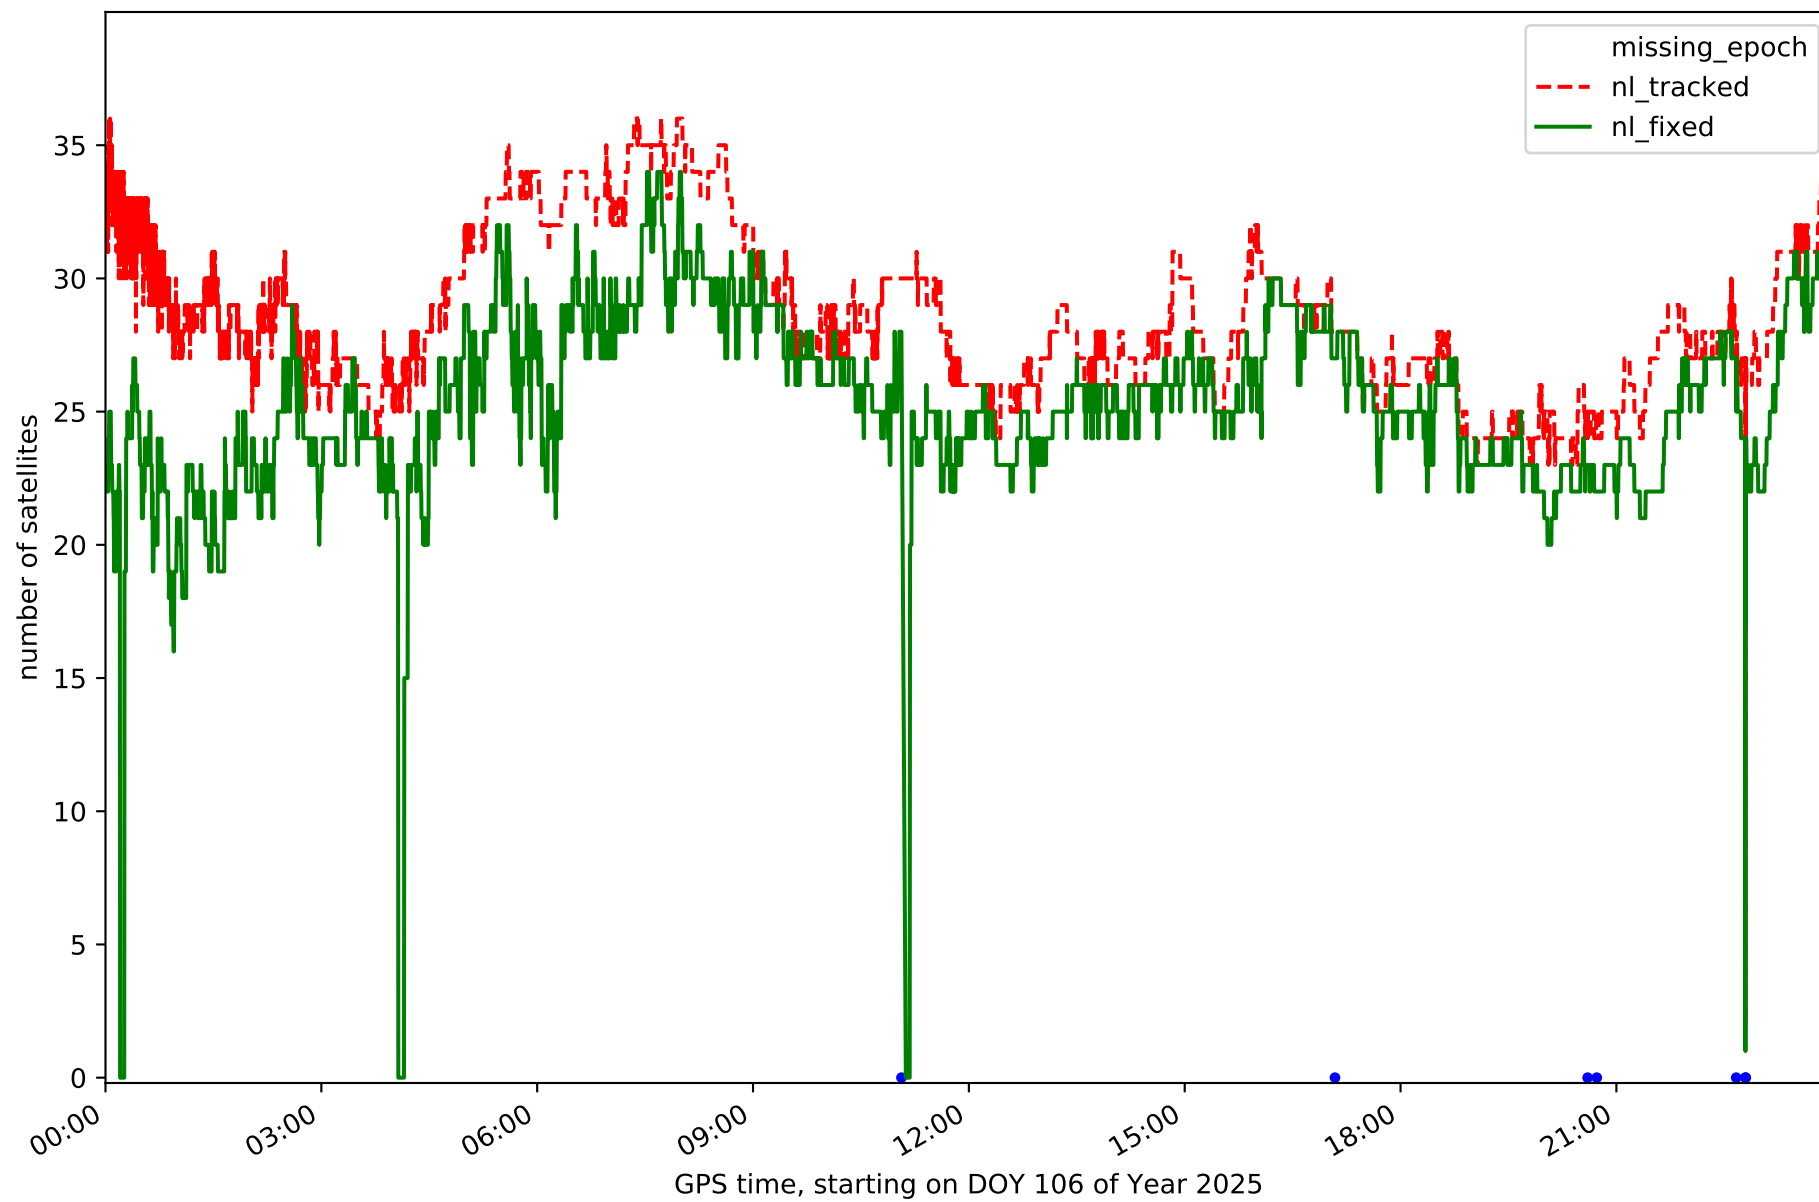


Station TN02 in network N32T

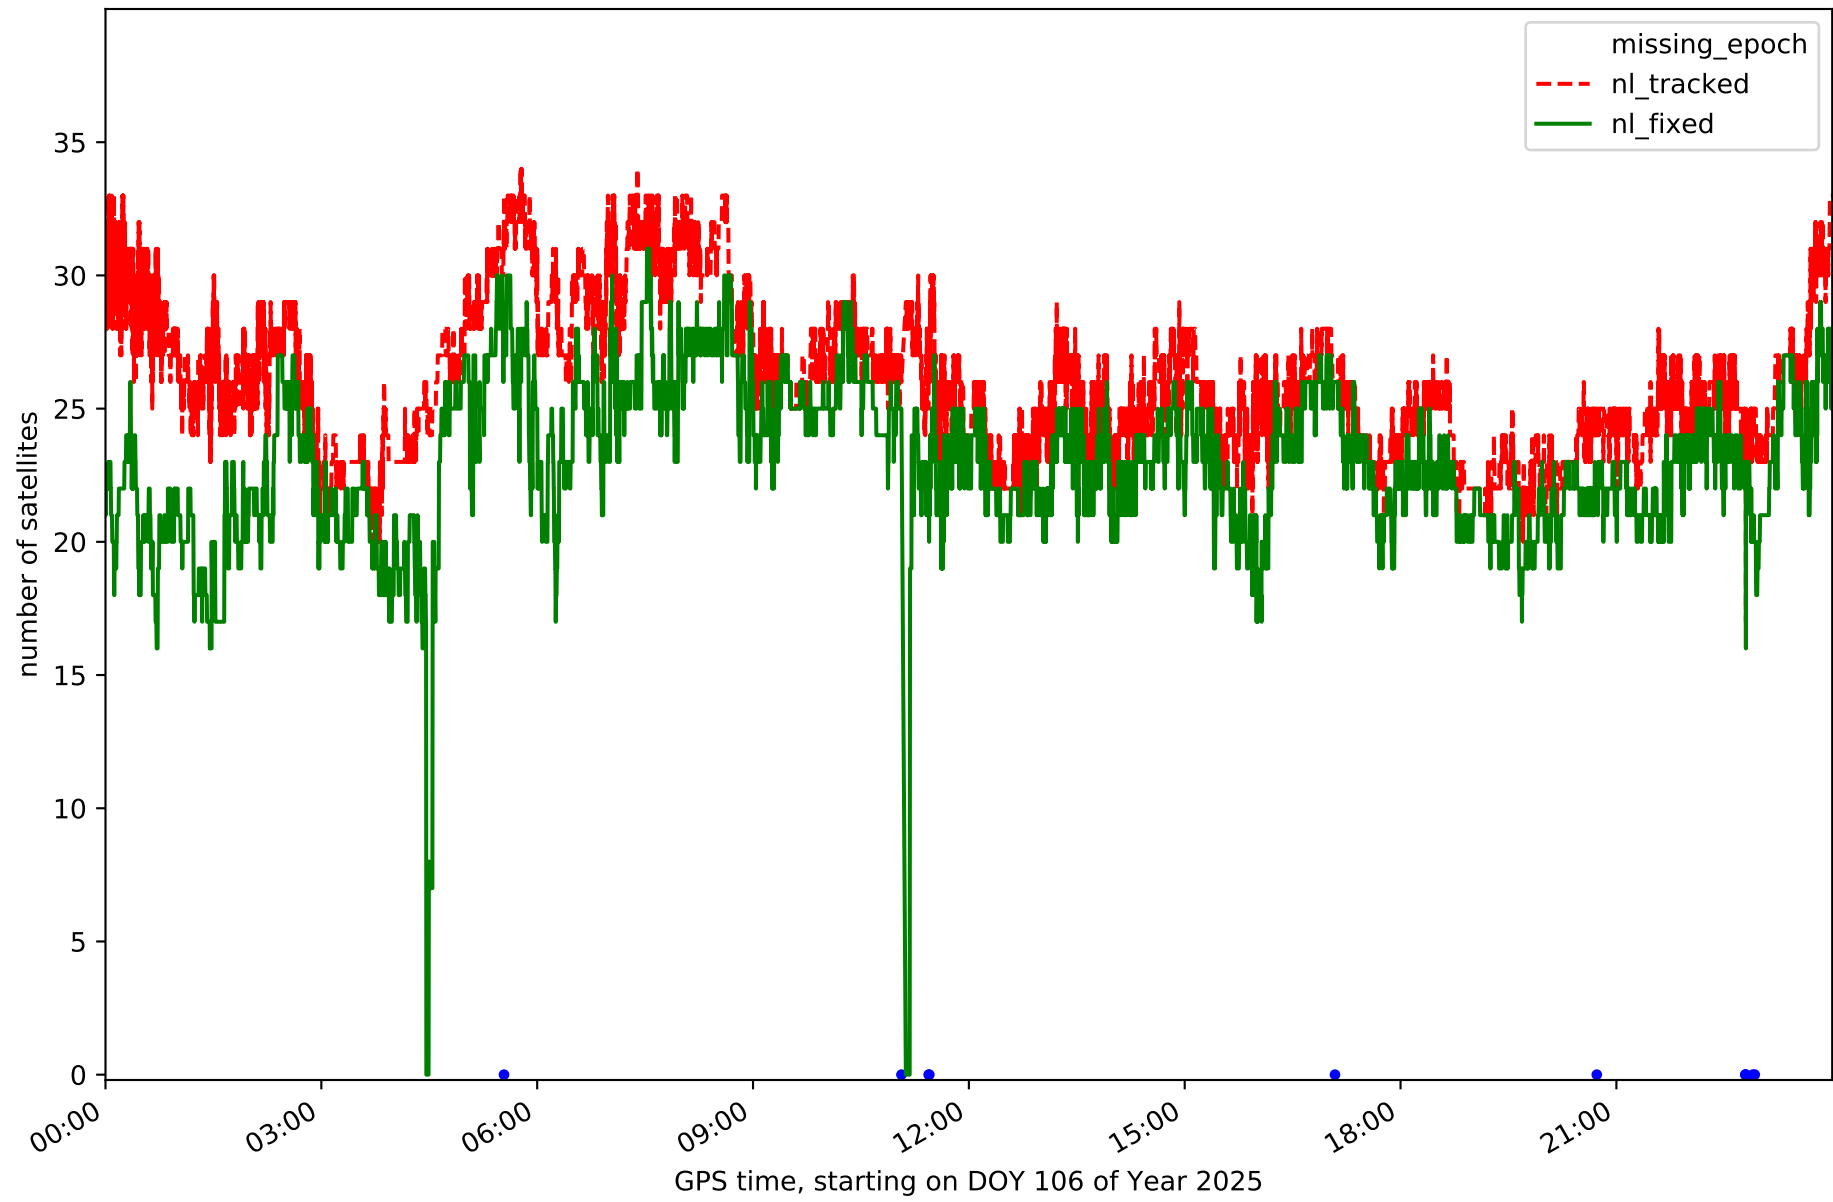


Station TN03 in network N32T

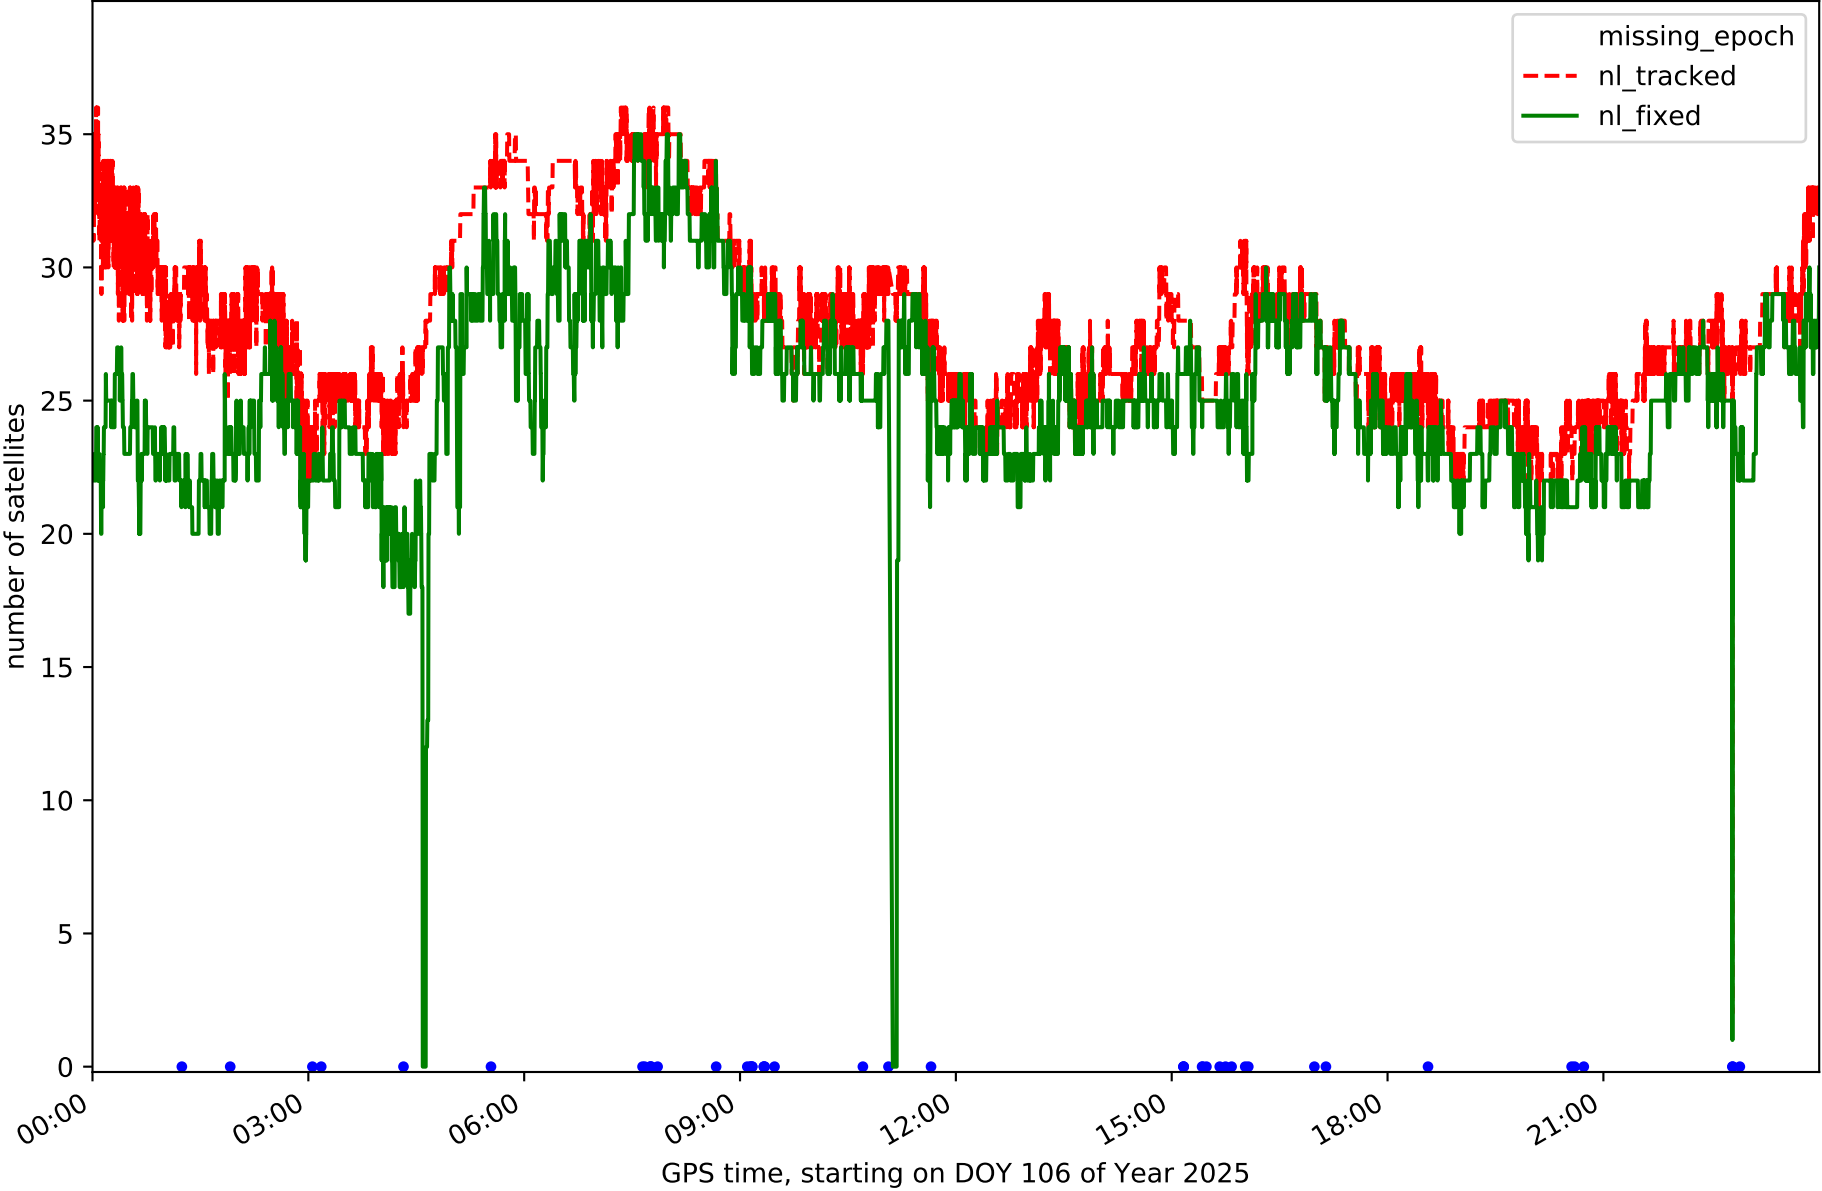


Station TN06 in network N32T

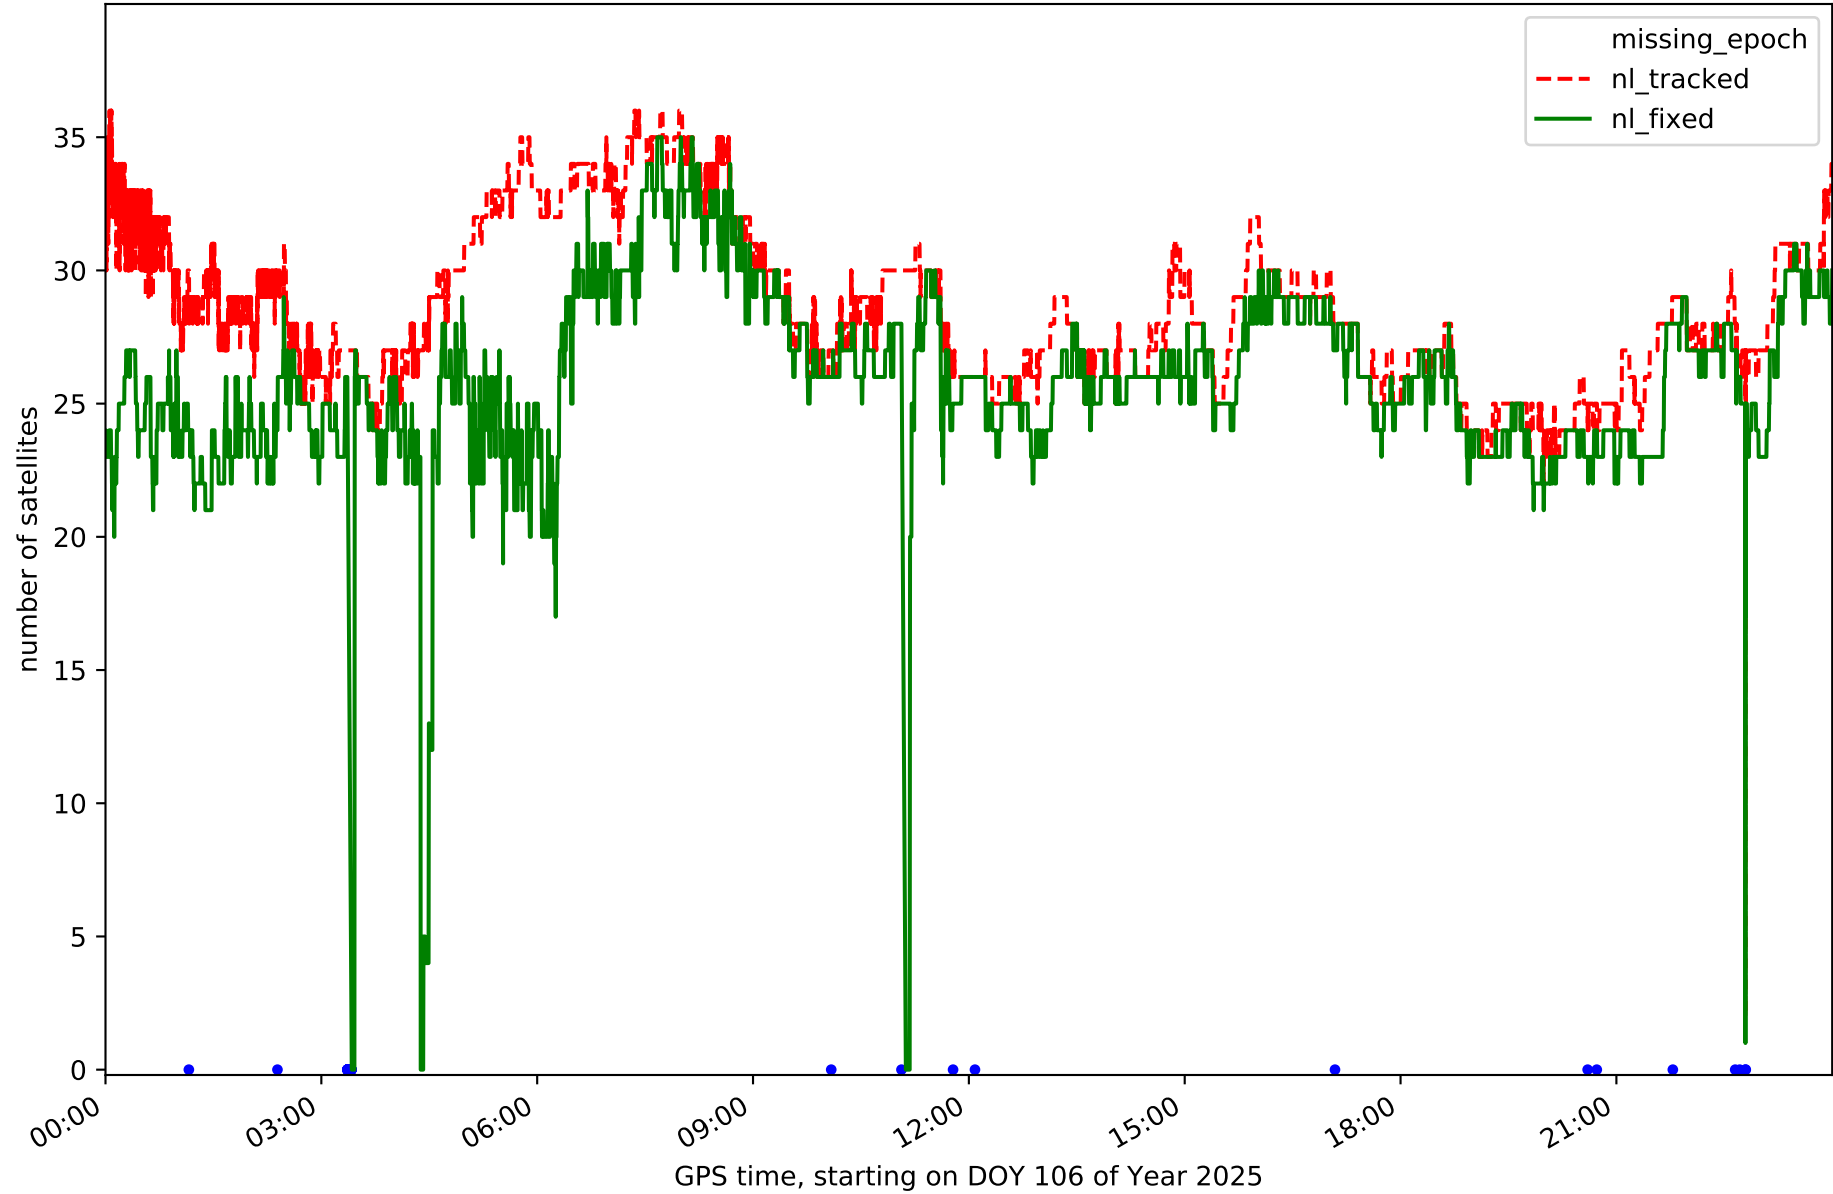


Station TN09 in network N32T

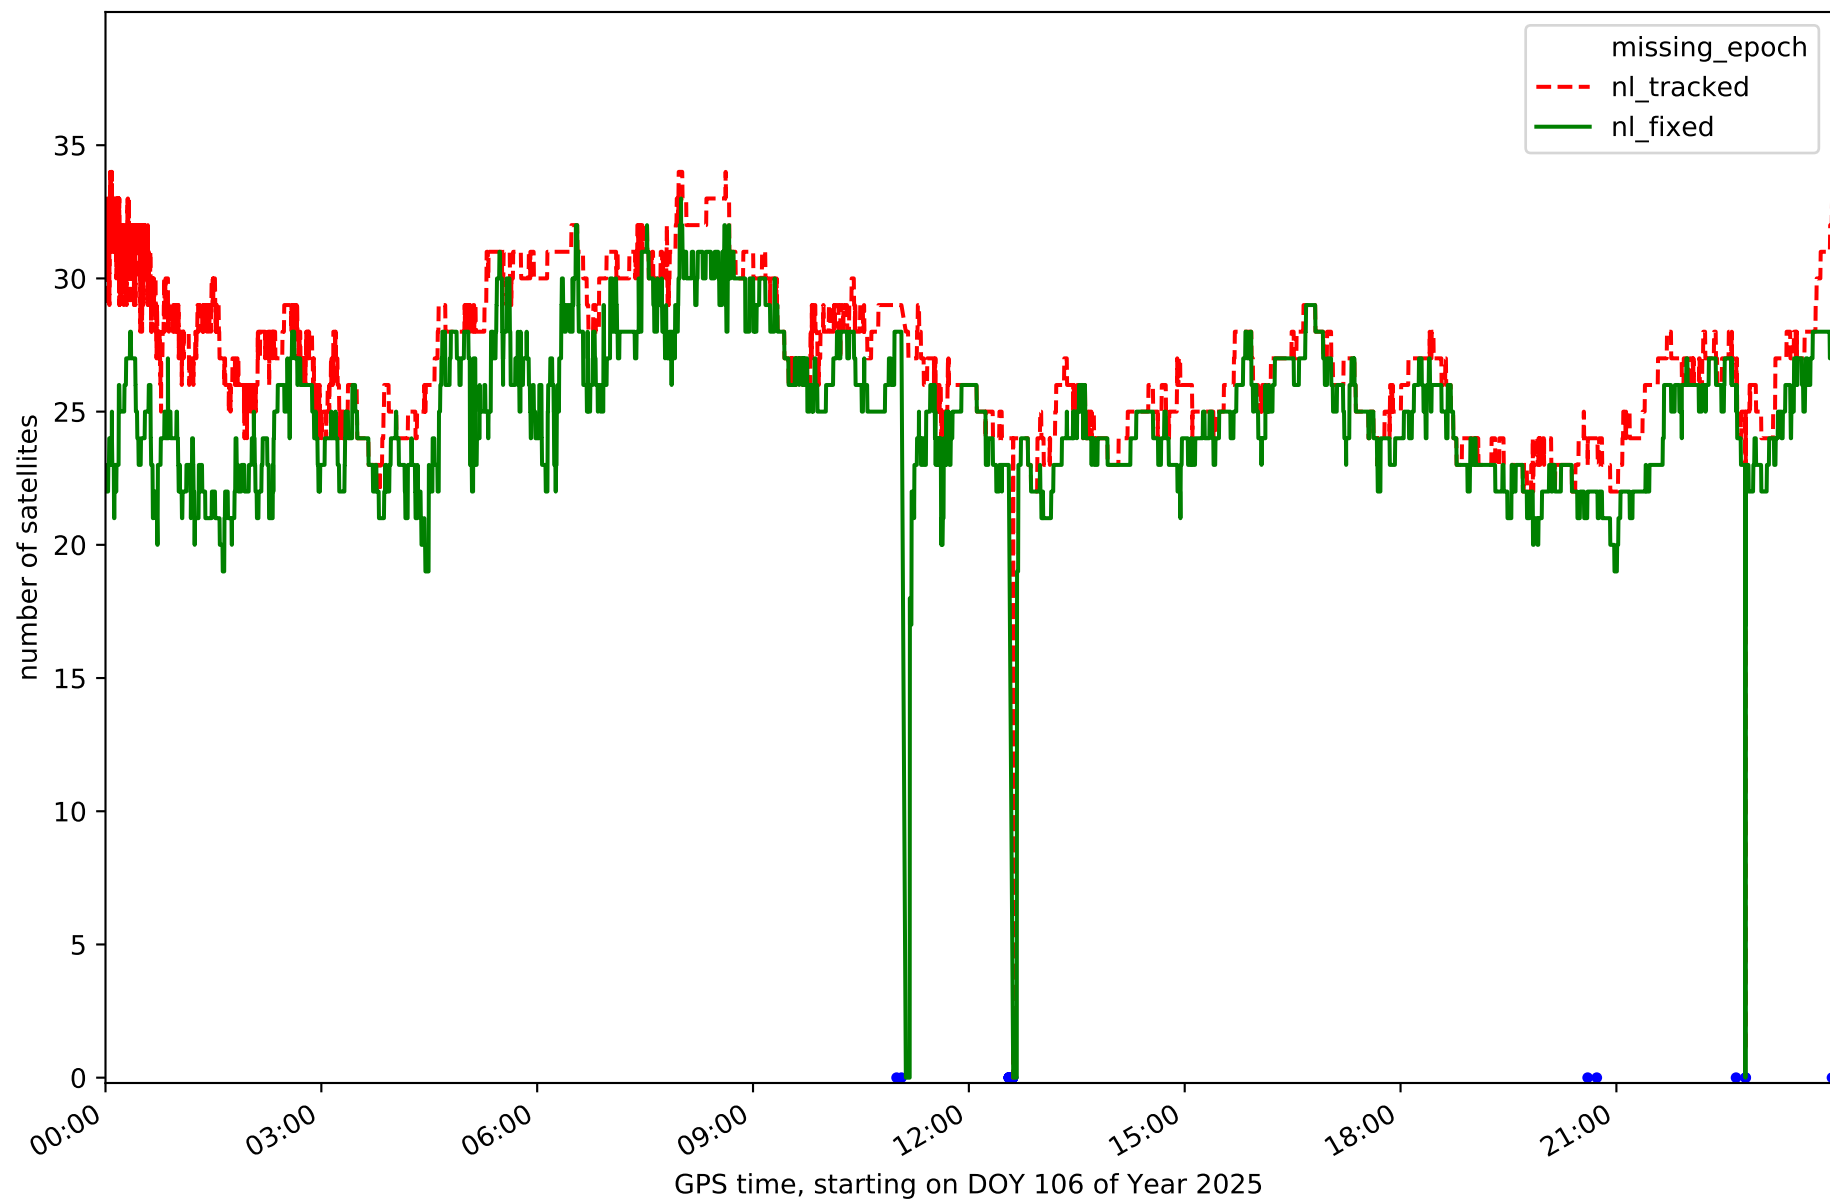


Station TE11 in network N32T

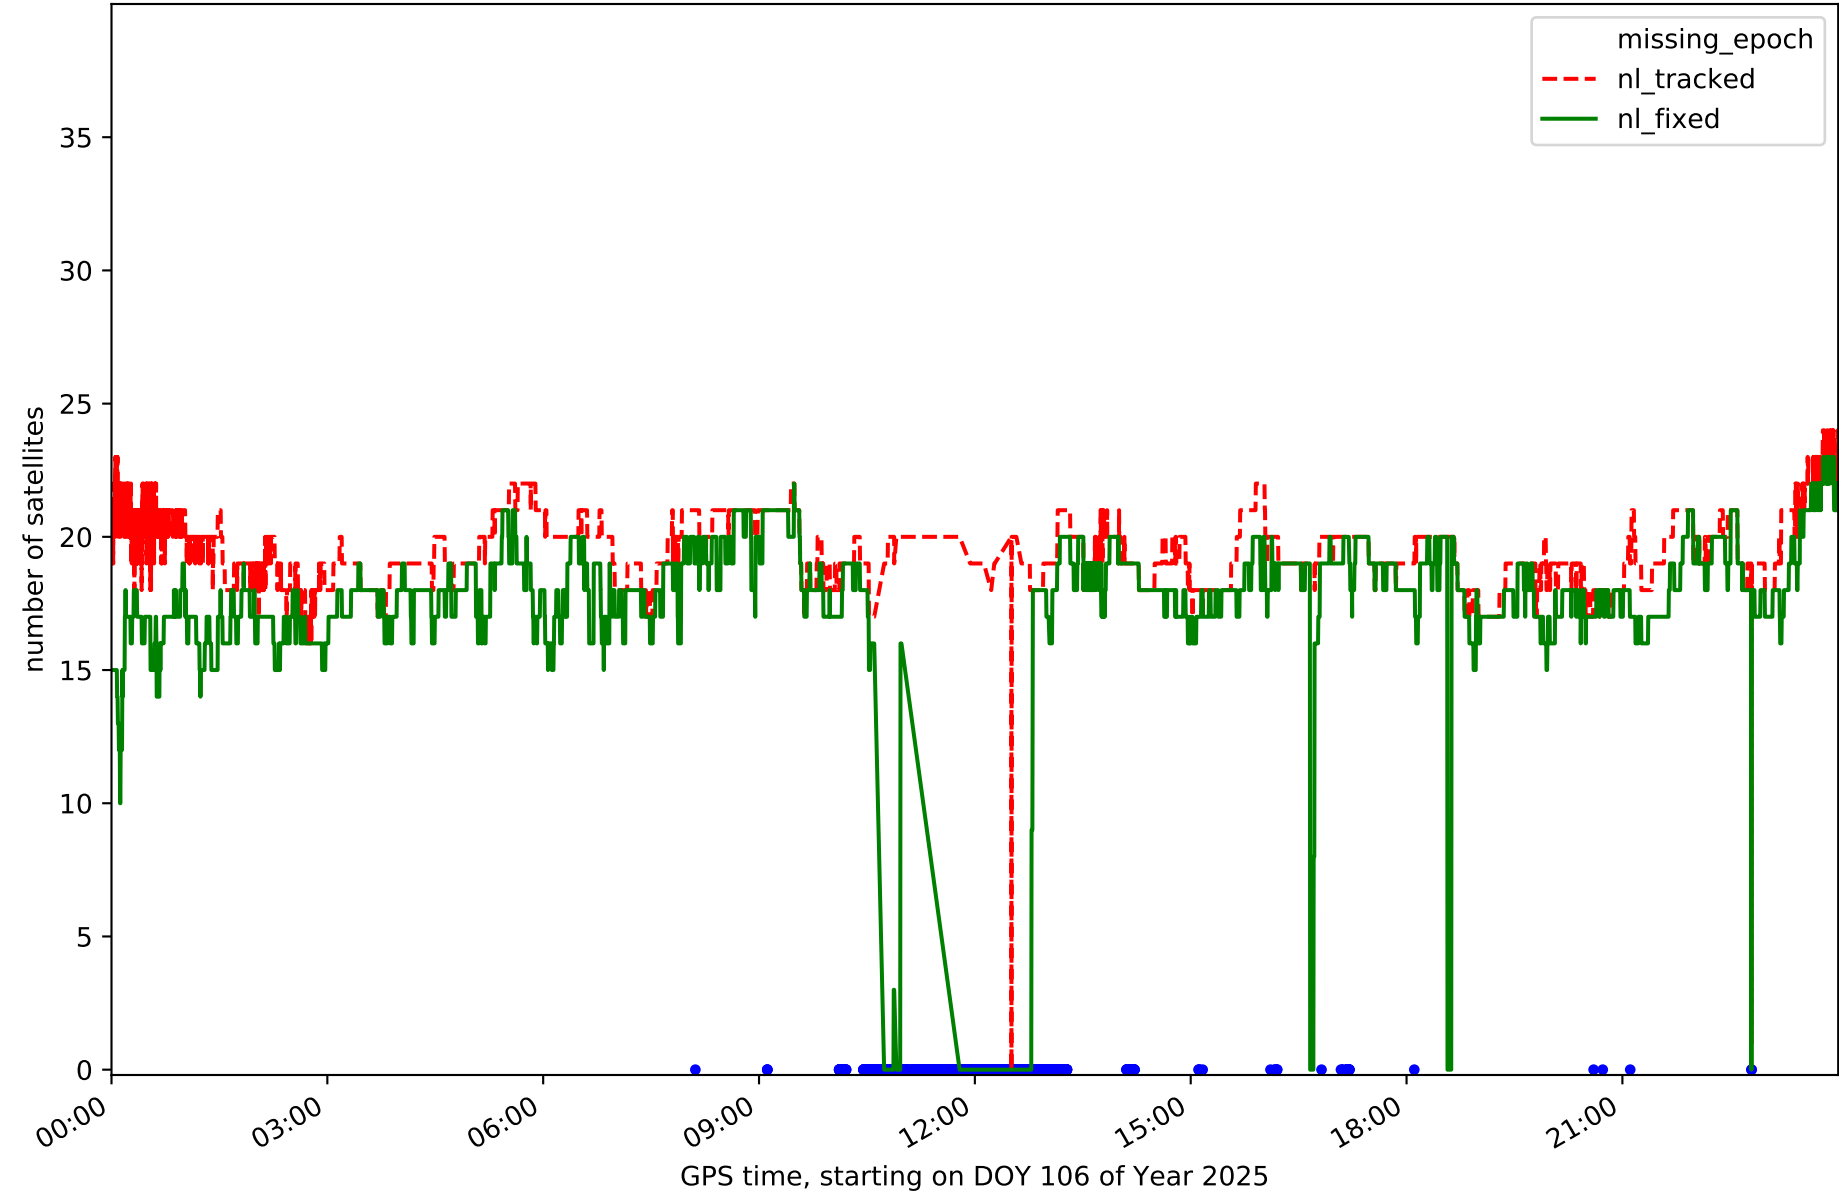


RefCheck for station EH01 in network N32T

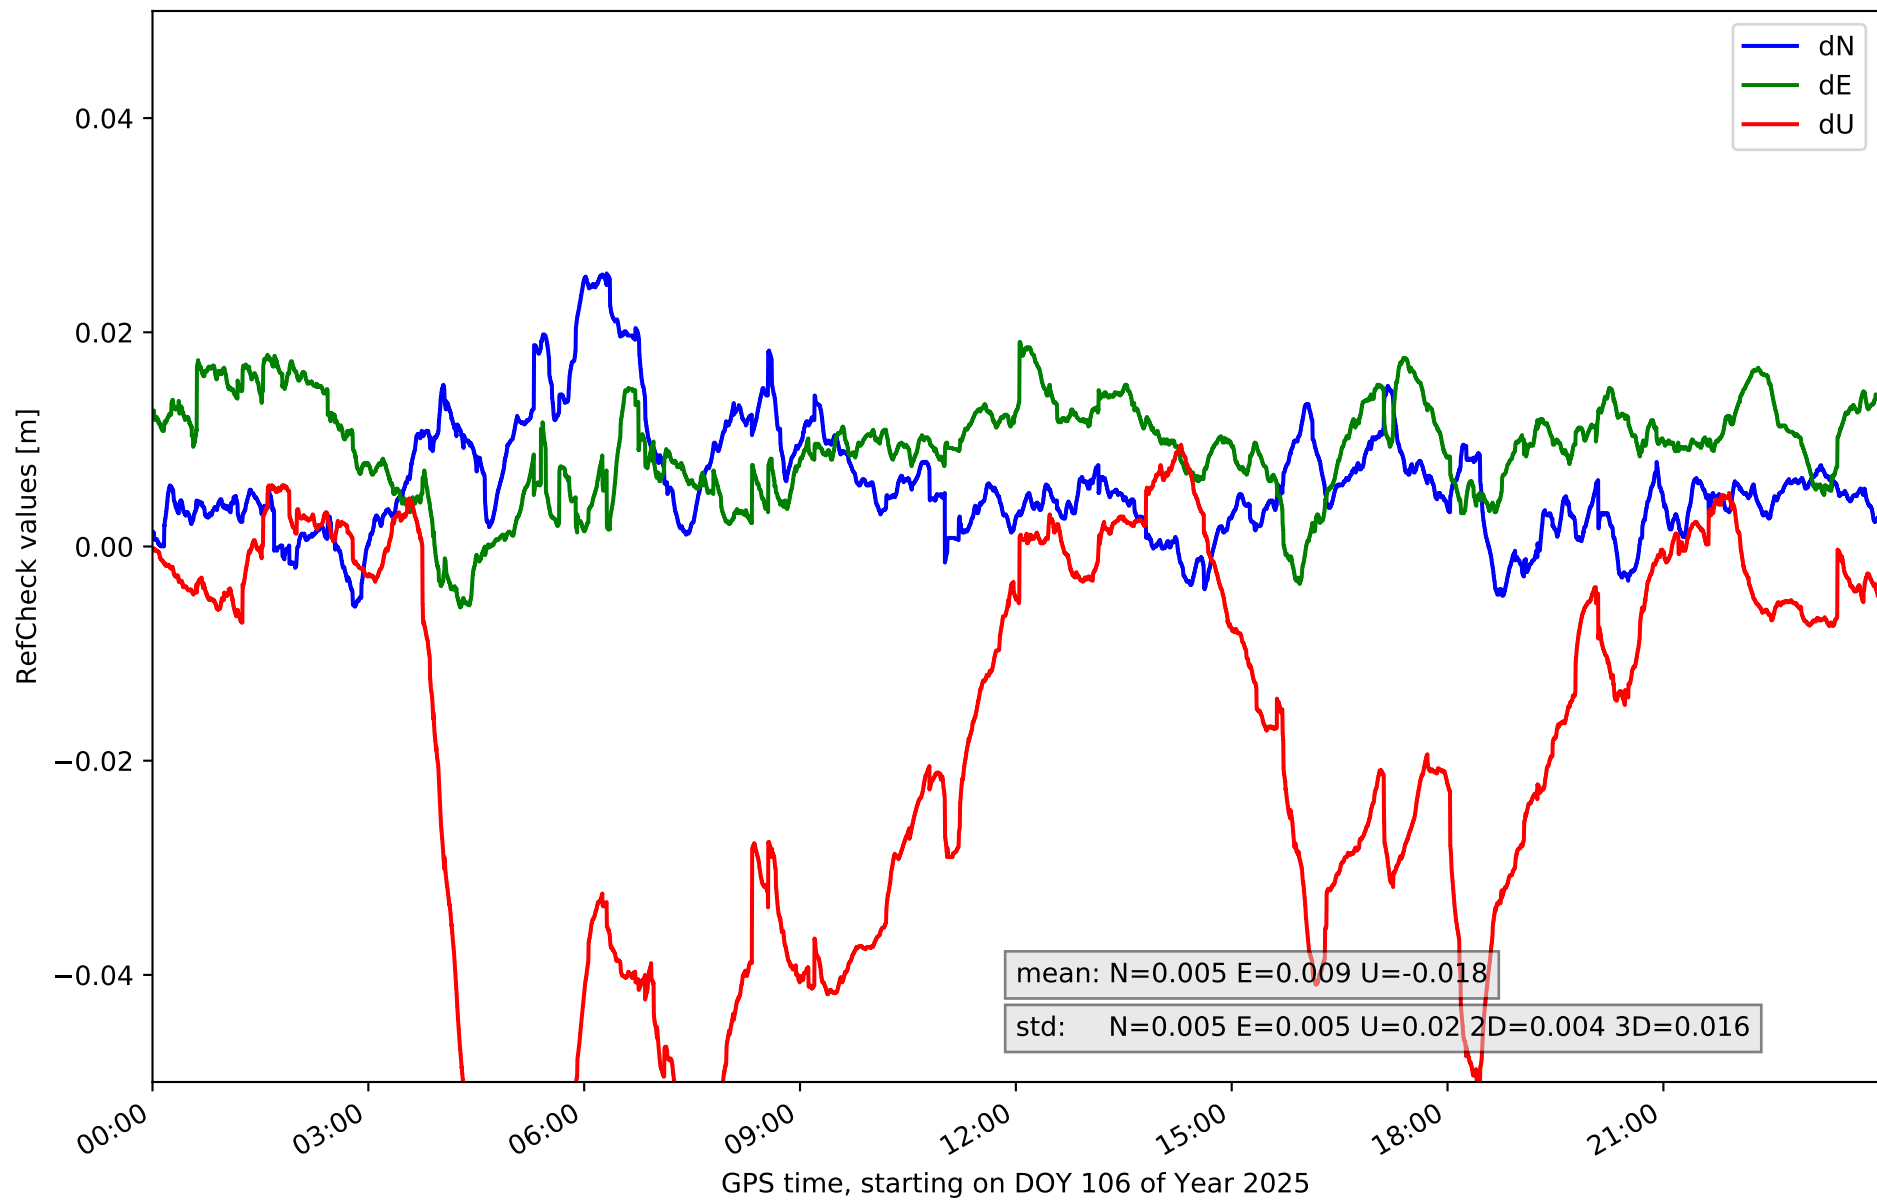


RefCheck for station EH02 in network N32T

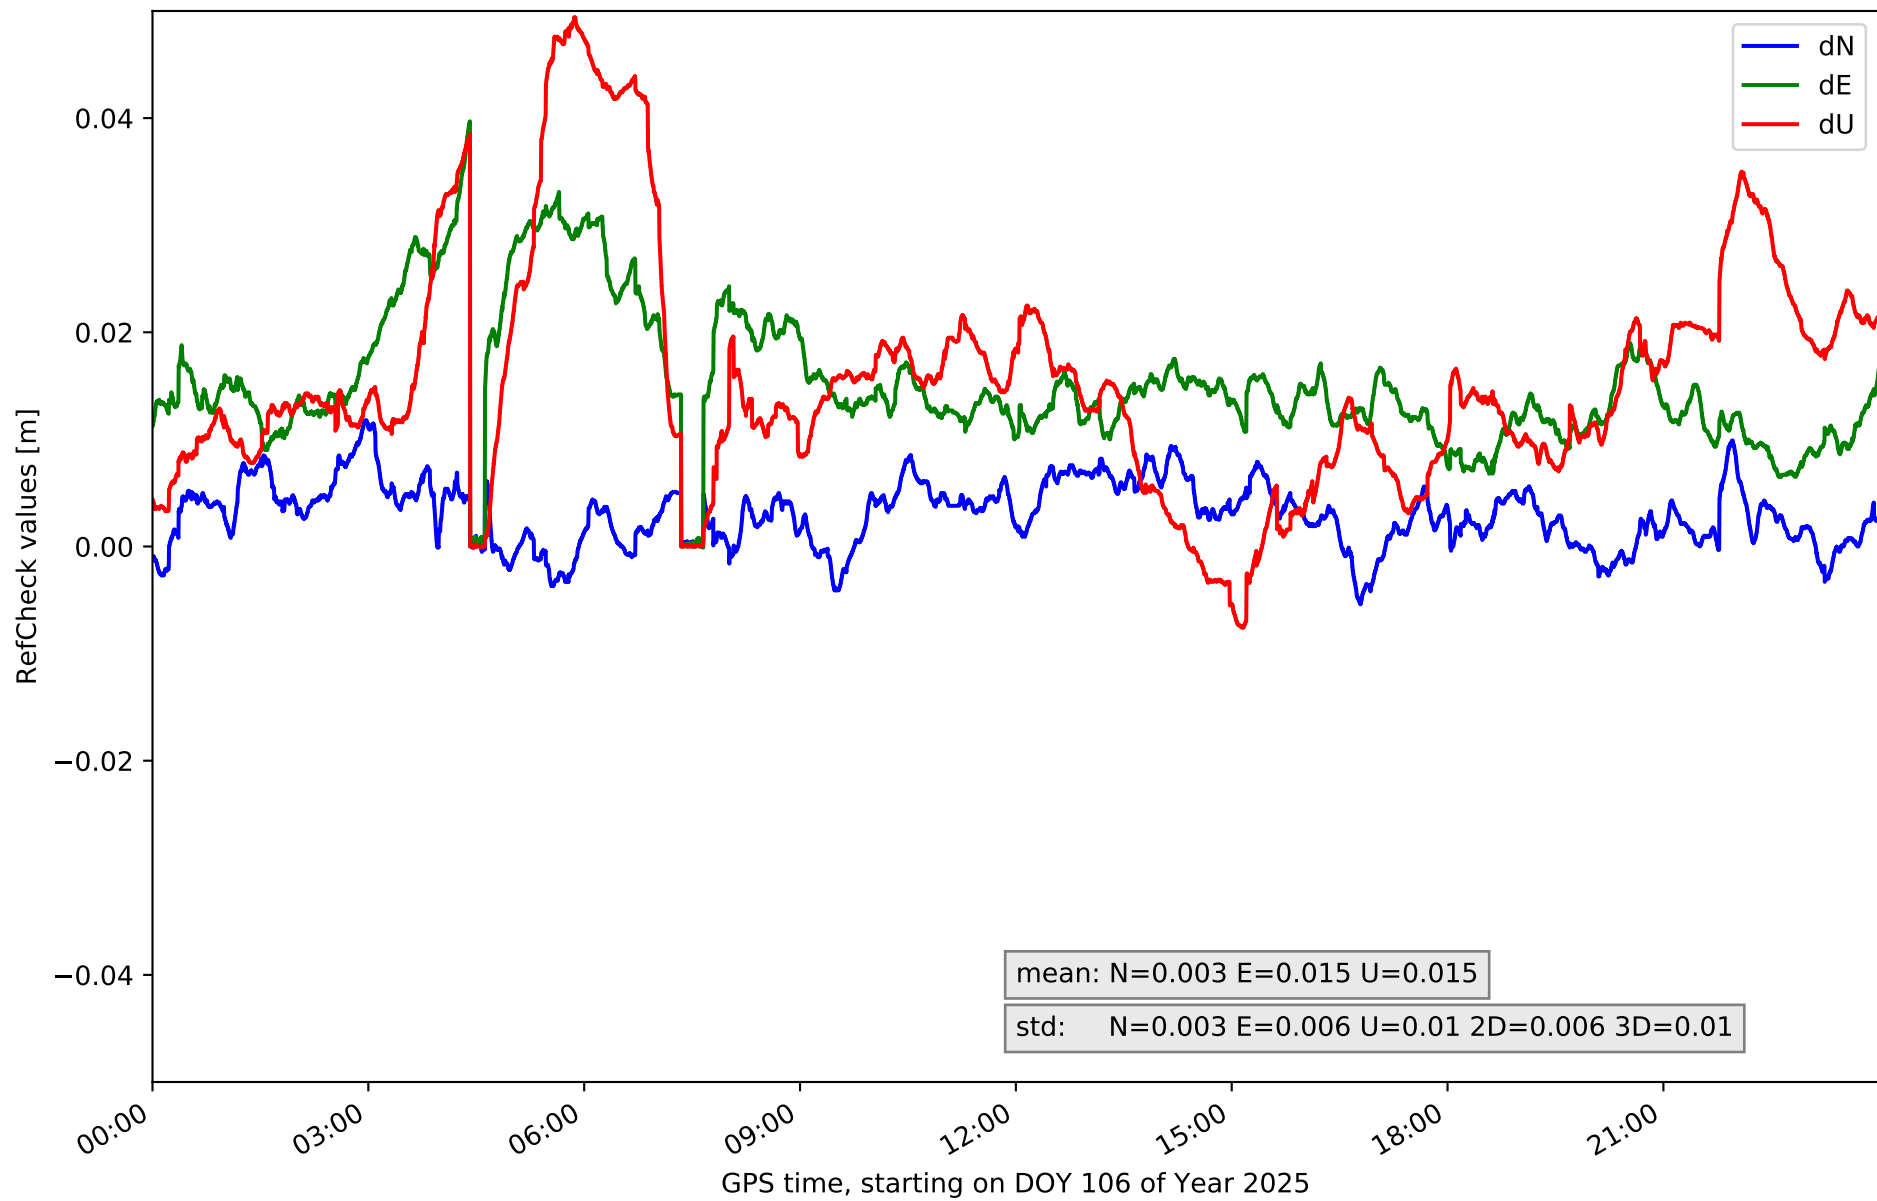


RefCheck for station GOM1 in network N32T

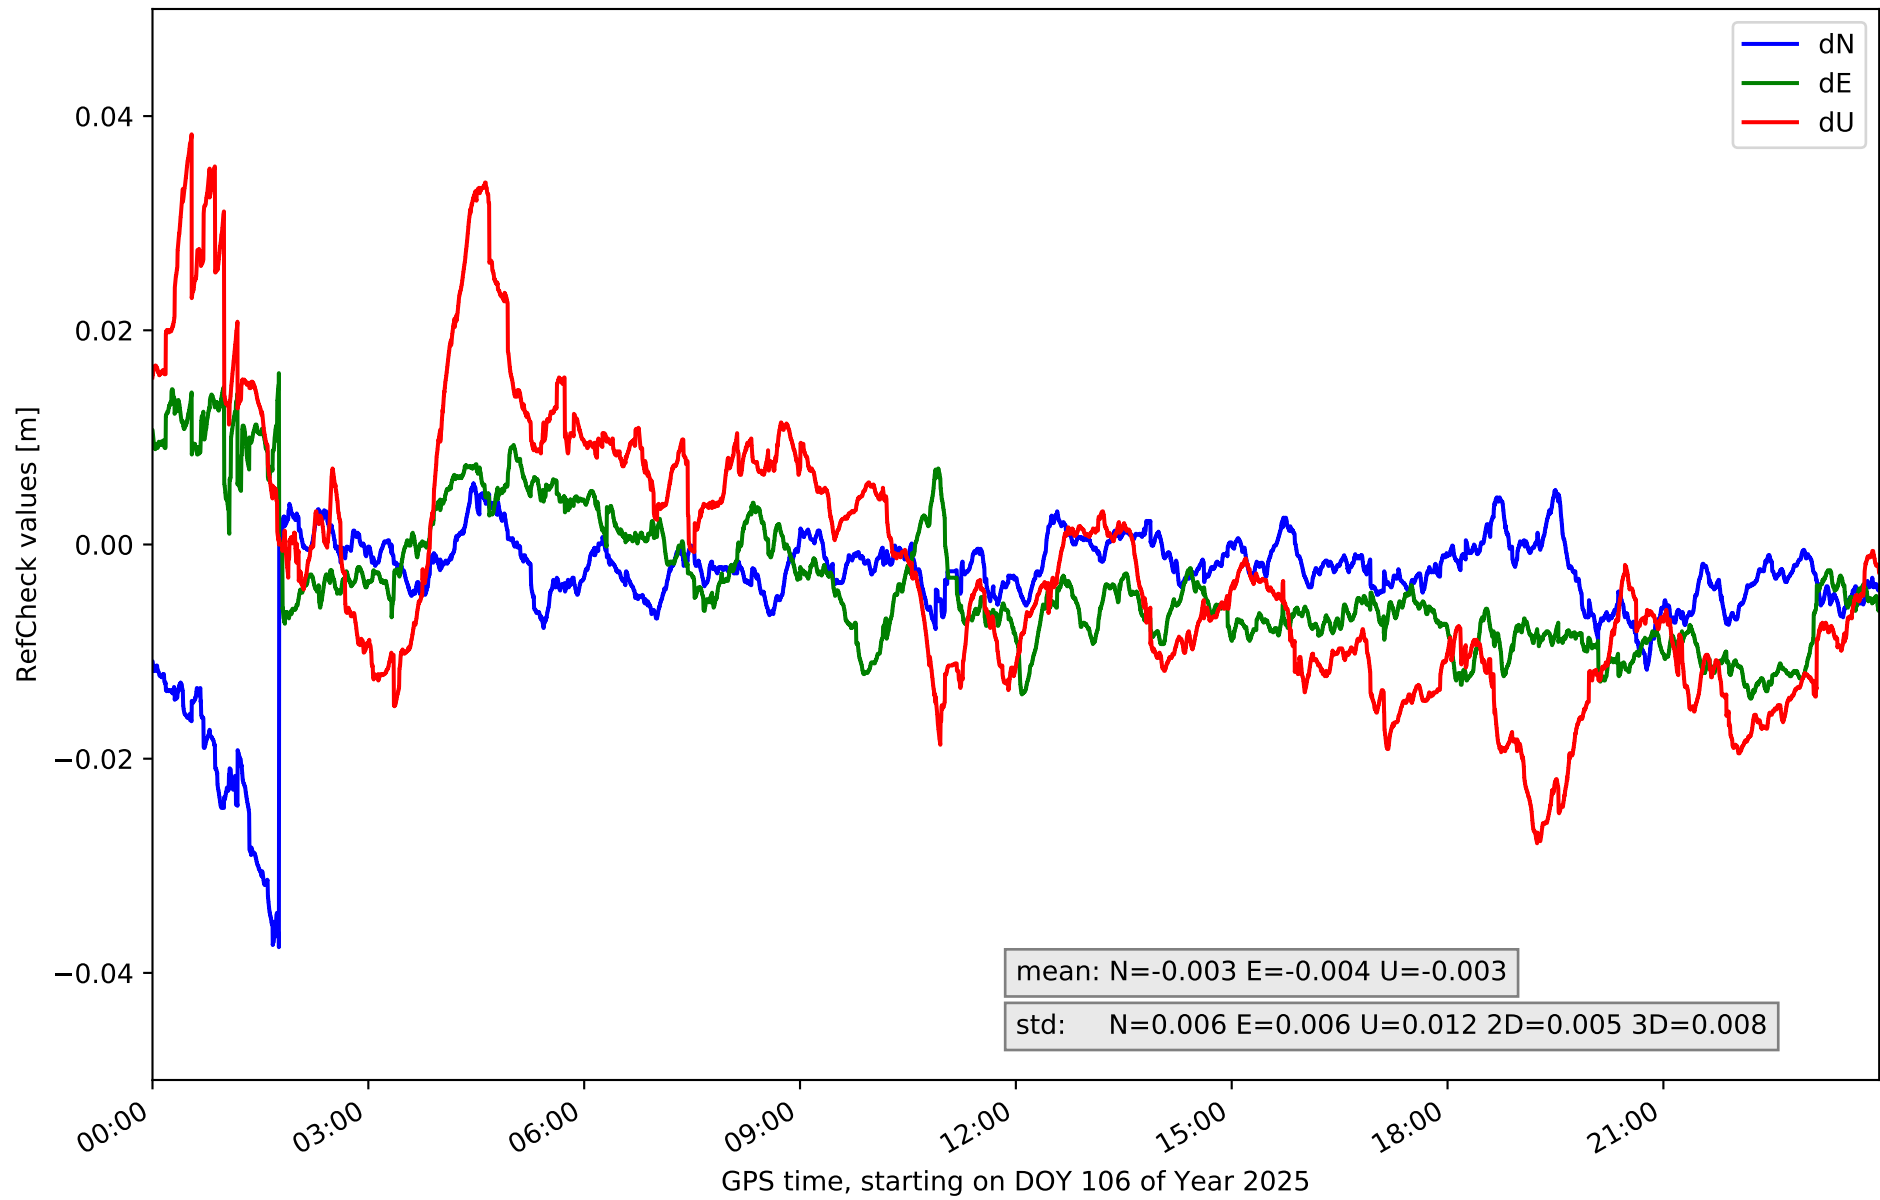


RefCheck for station IZAN in network N32T

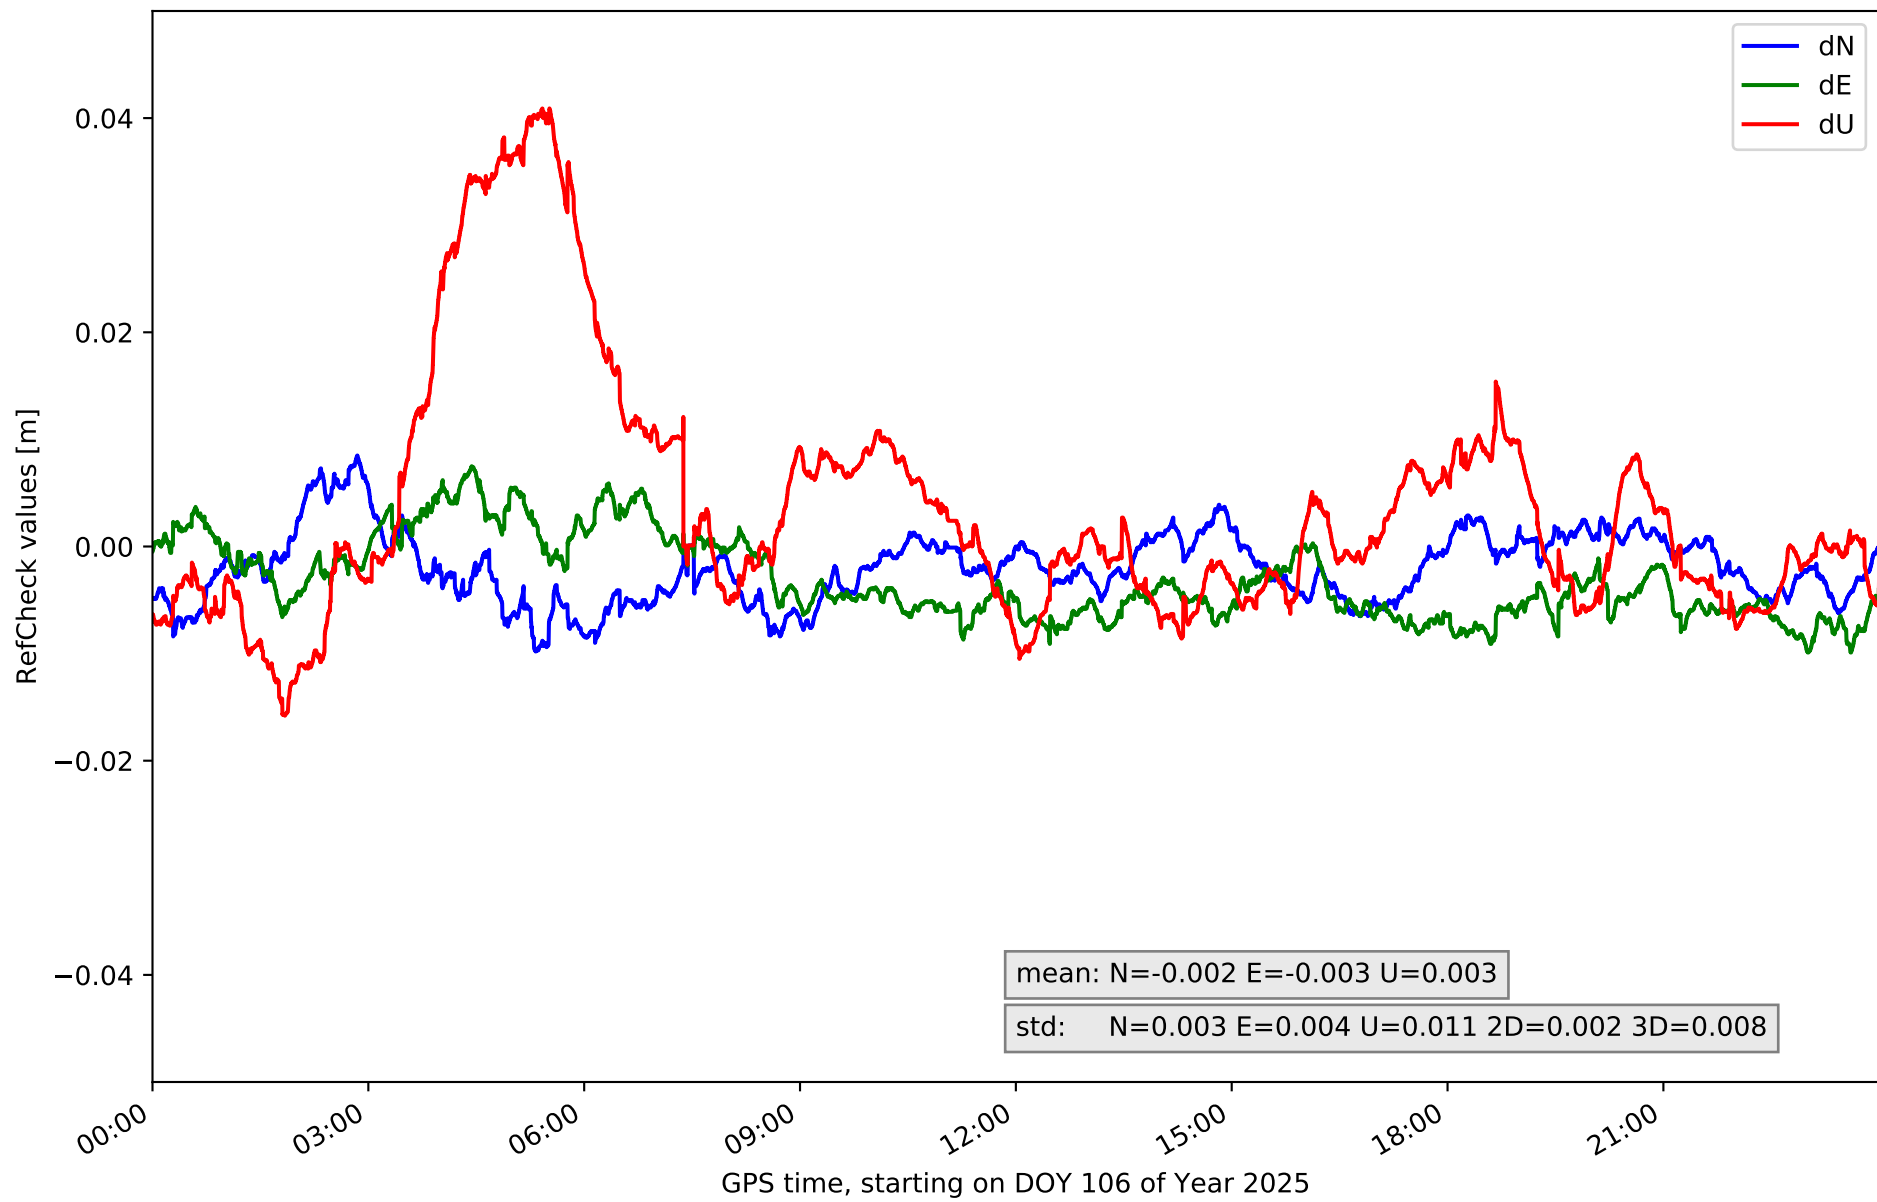


RefCheck for station LP01 in network N32T

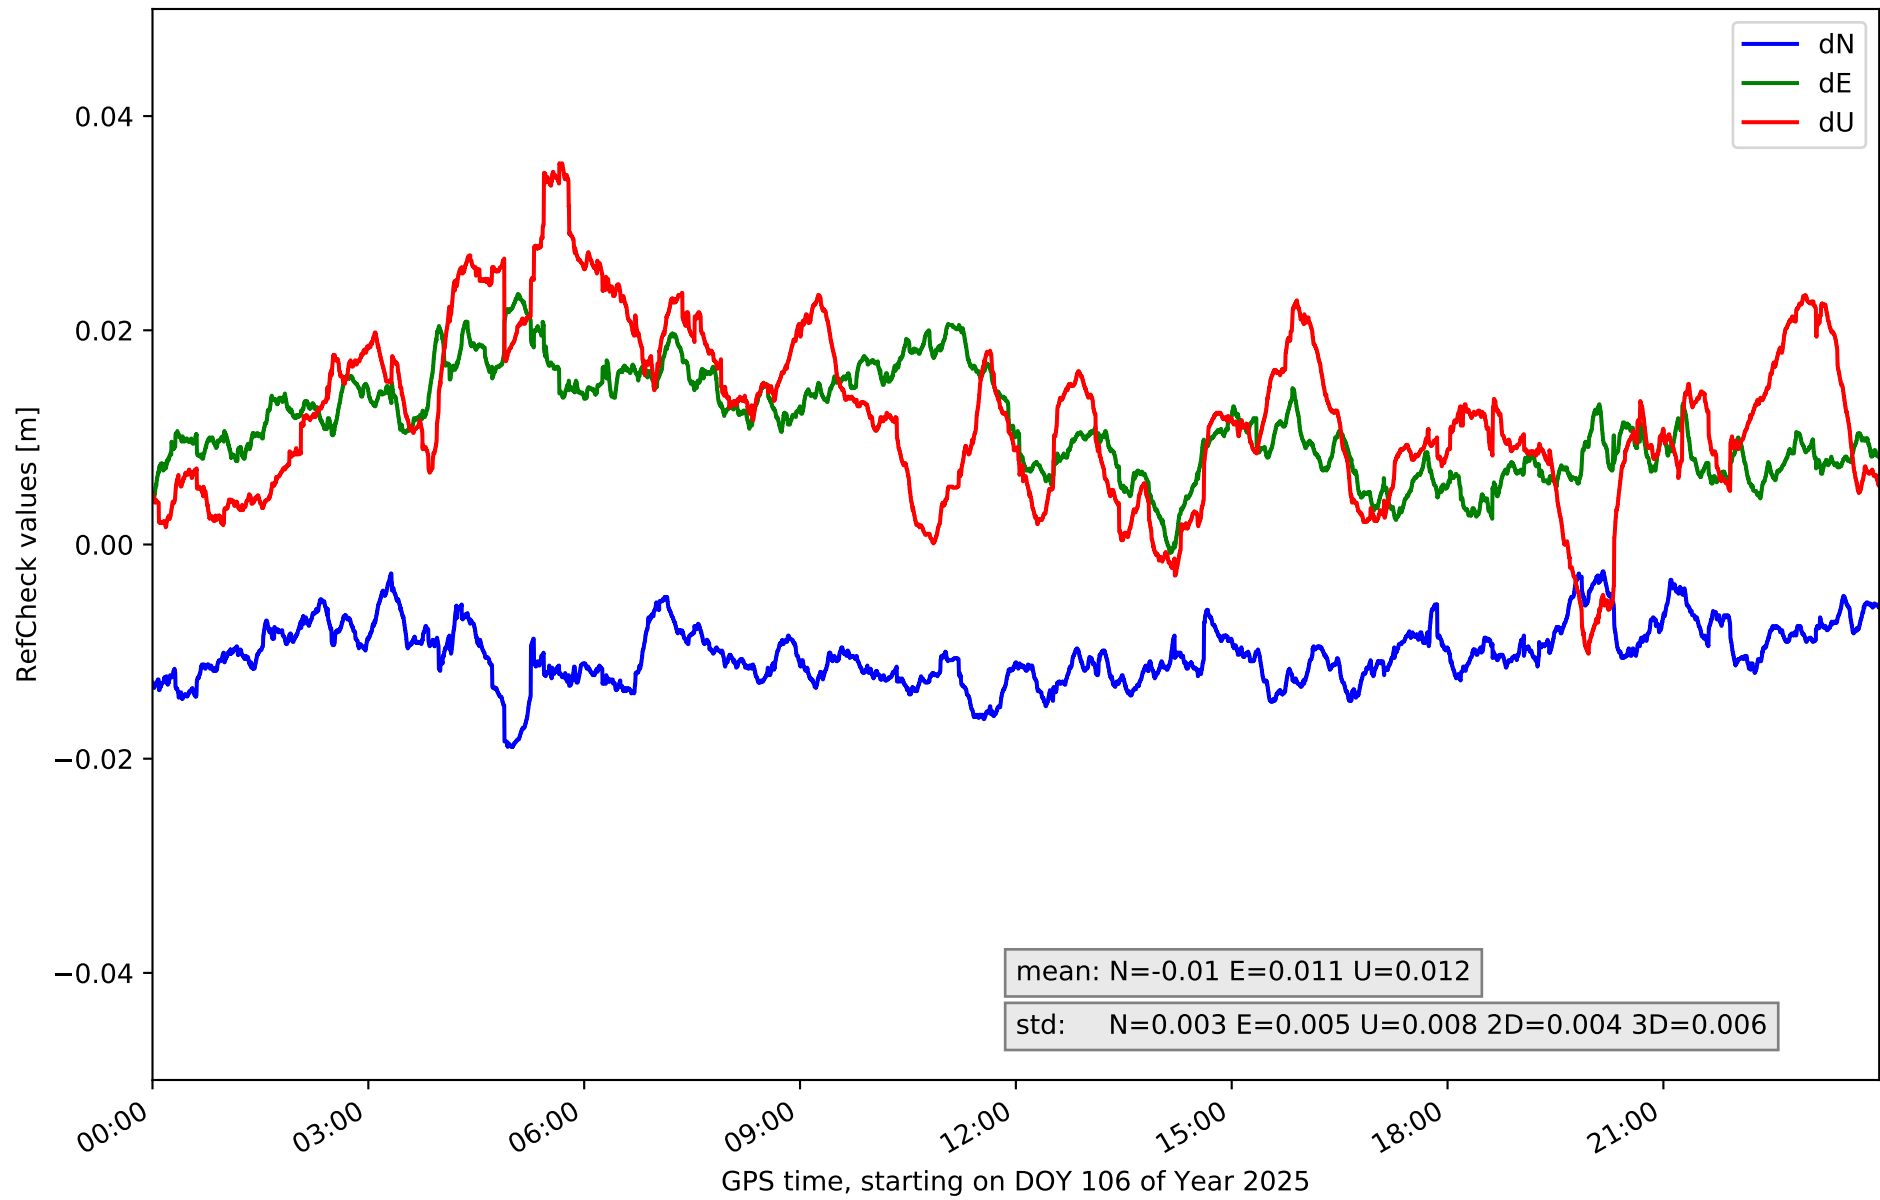


RefCheck for station LP03 in network N32T

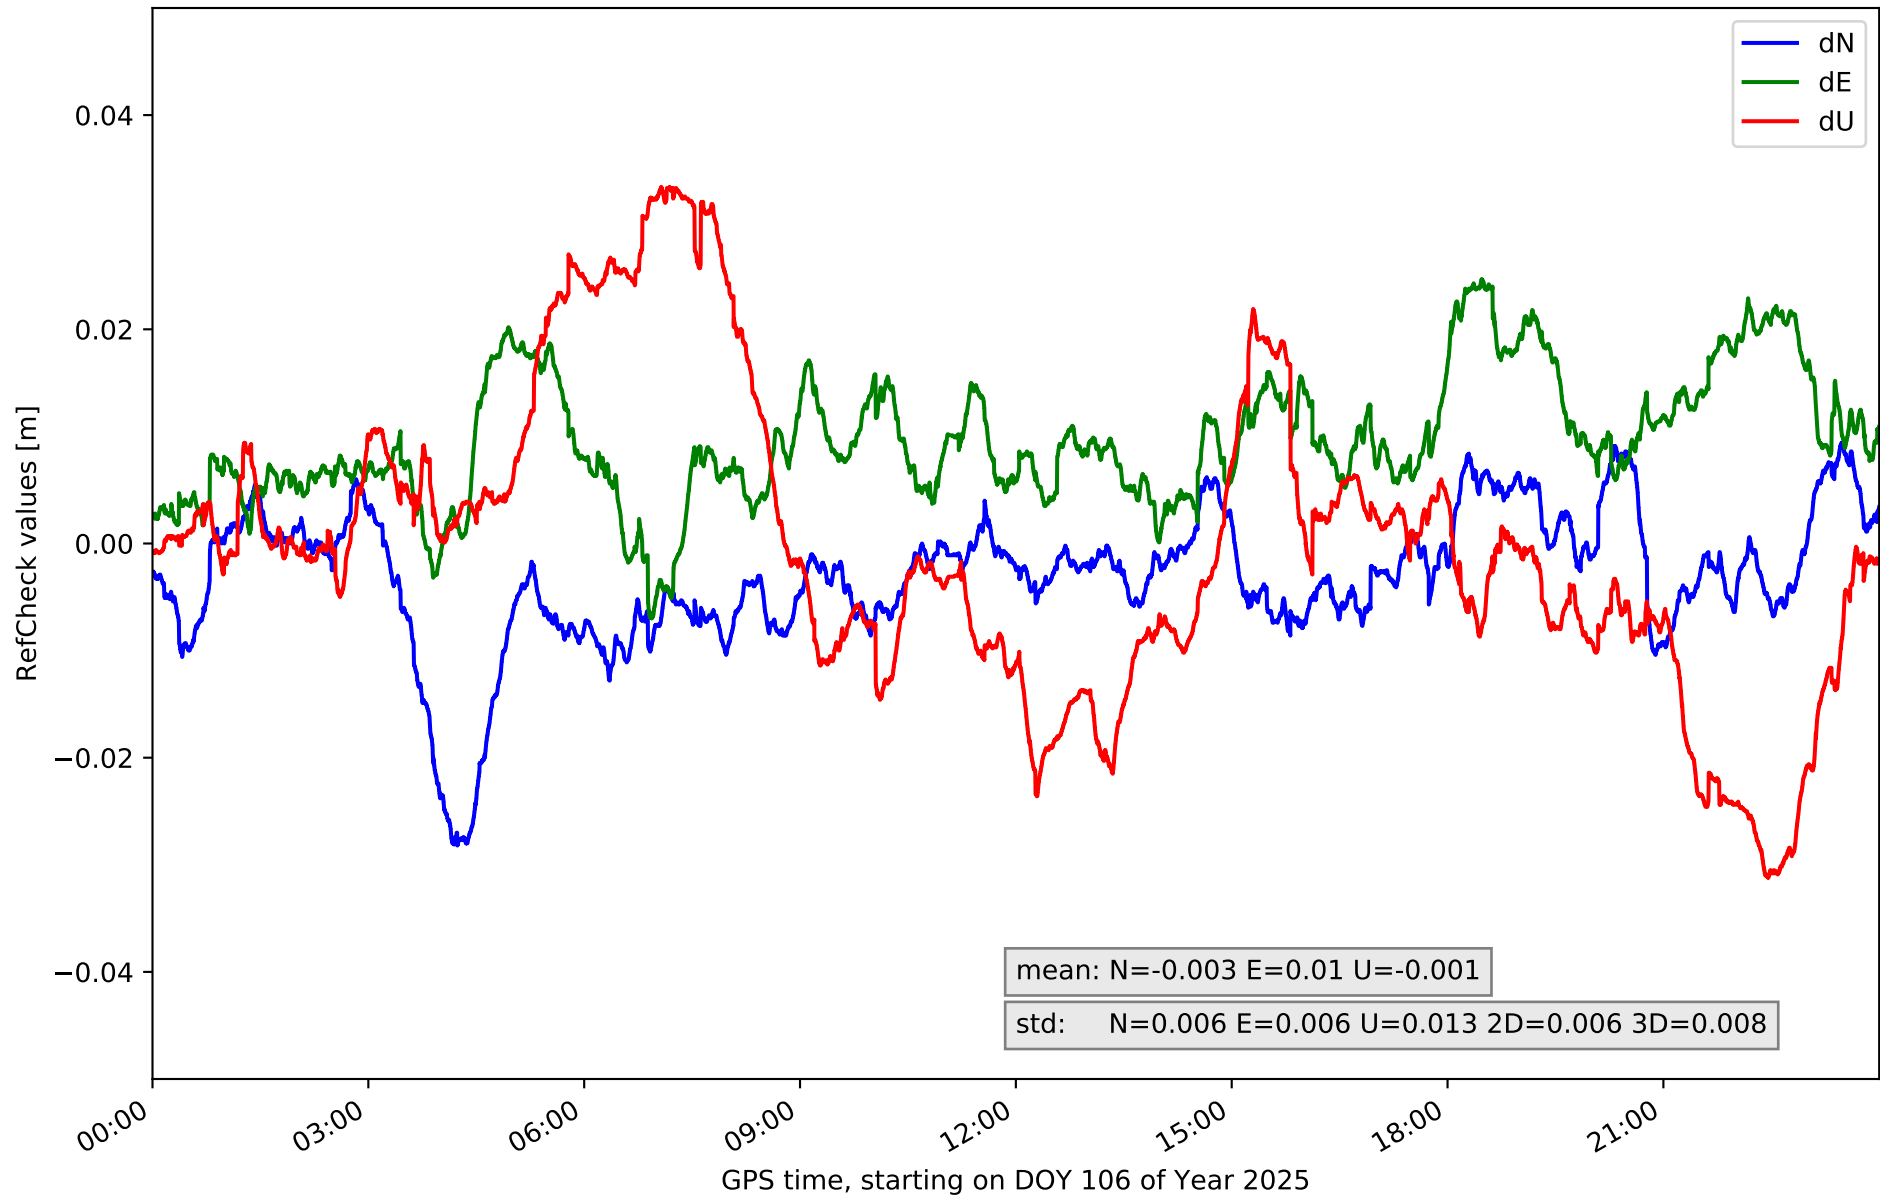


RefCheck for station LPAL in network N32T

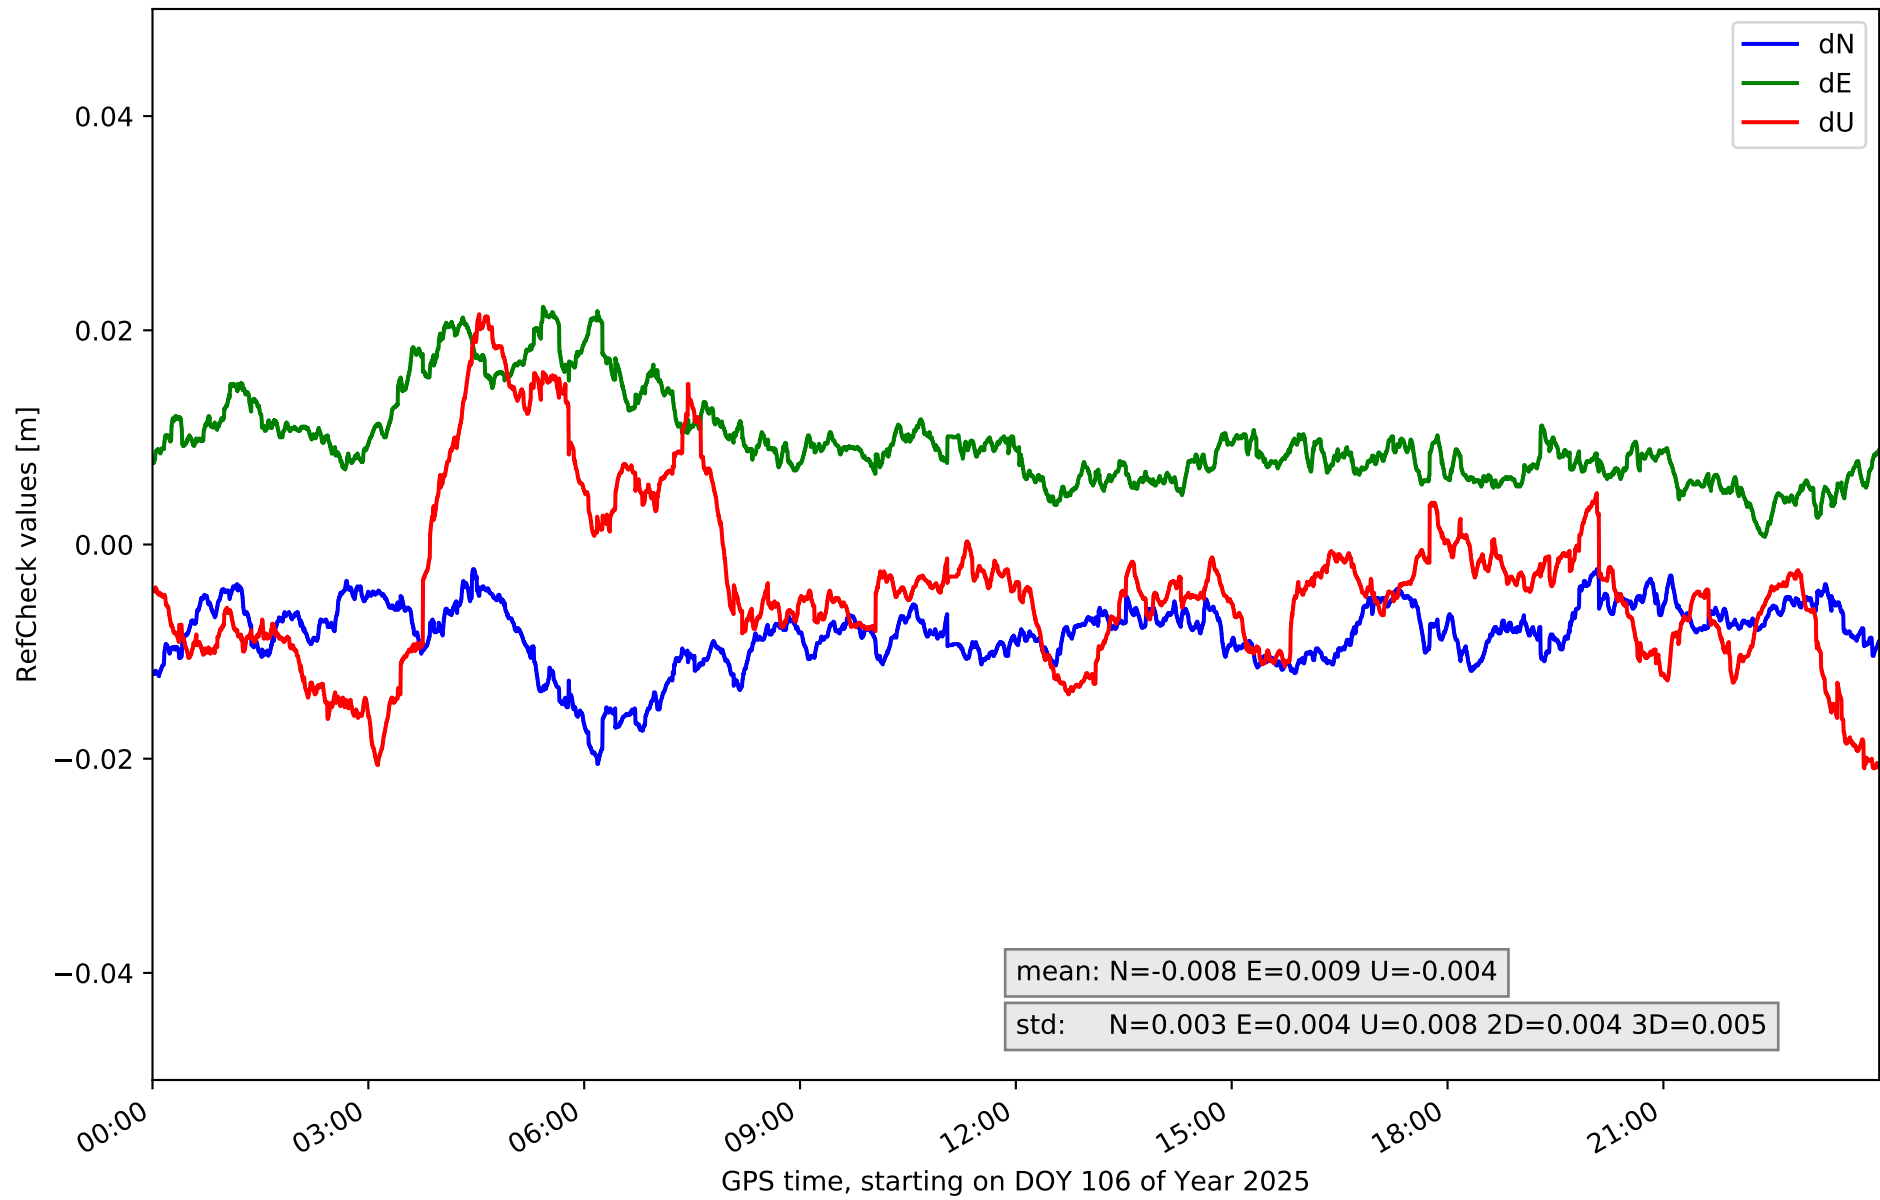


RefCheck for station LRES in network N32T

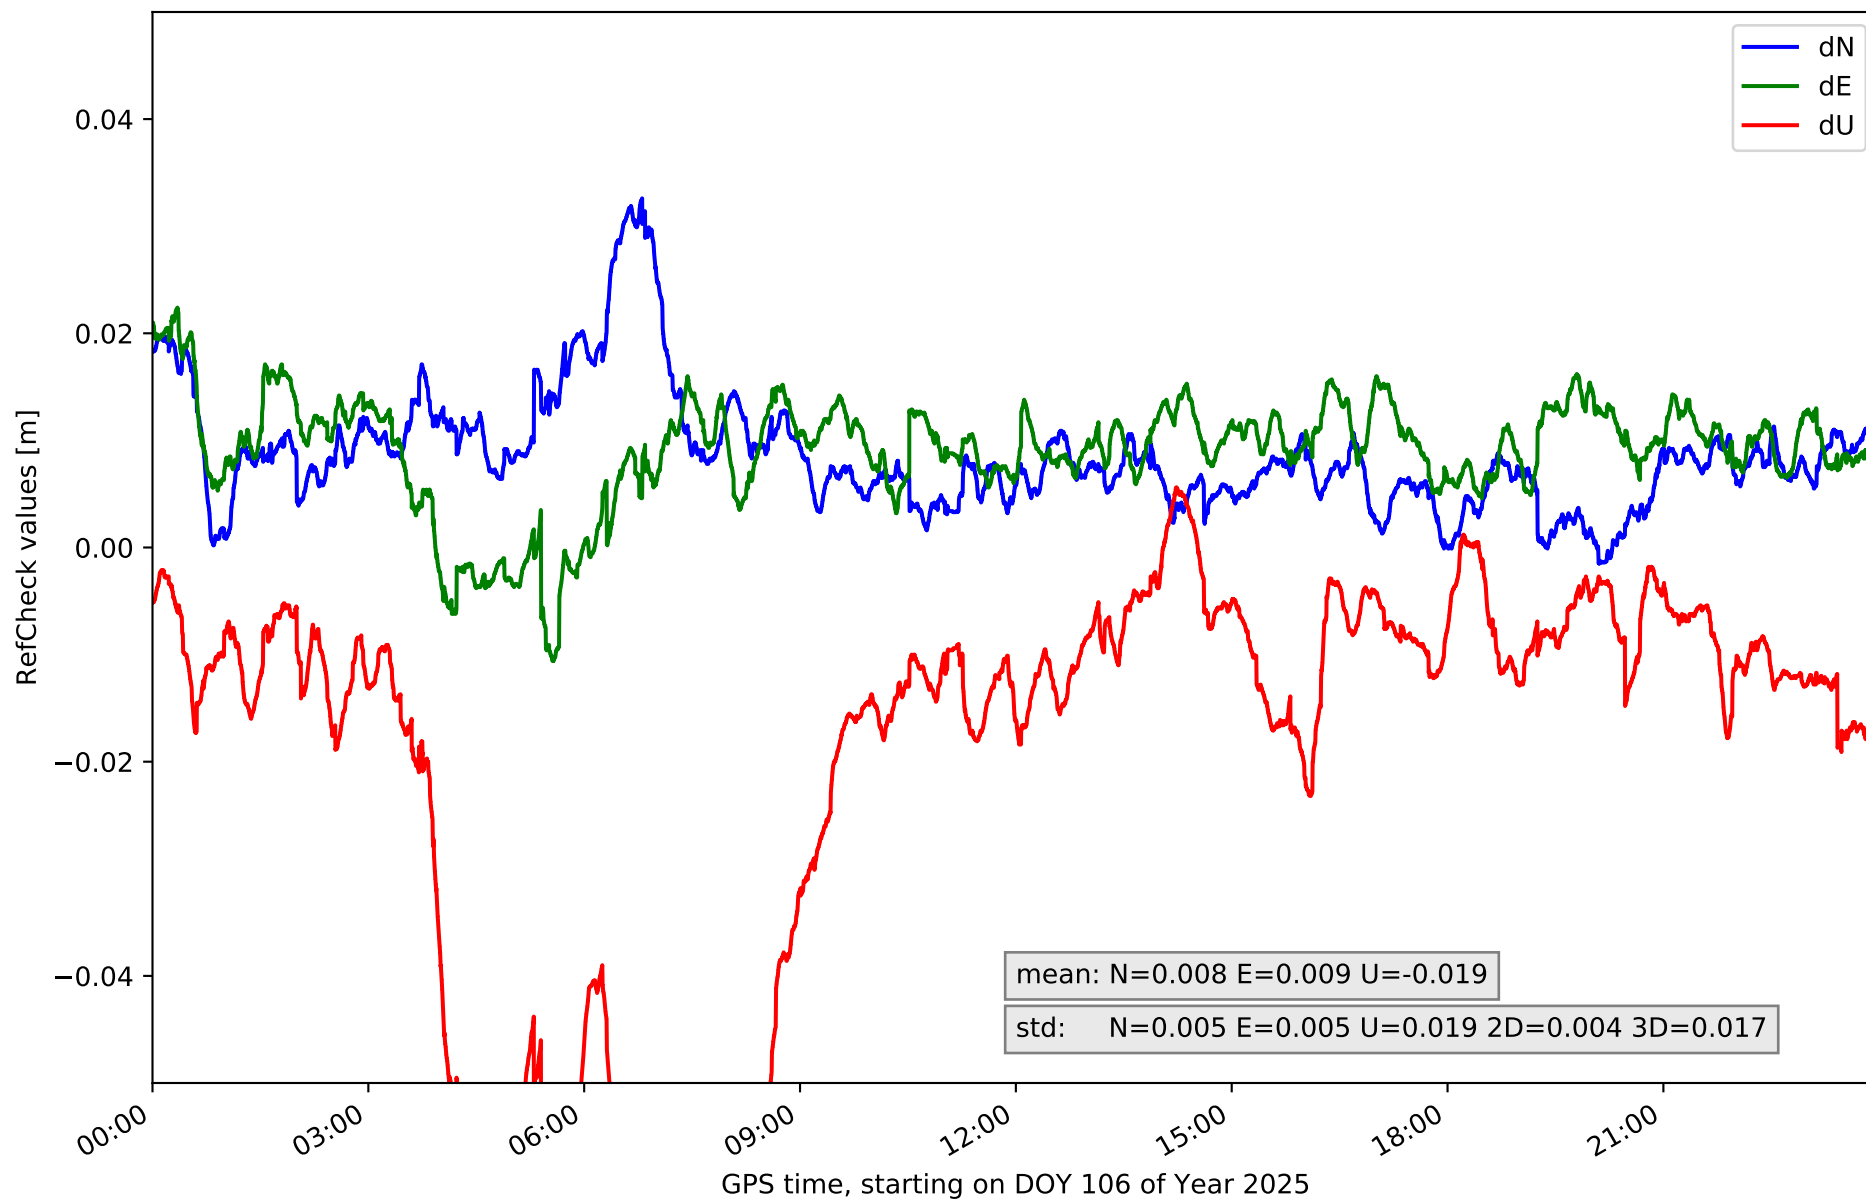


RefCheck for station TN01 in network N32T

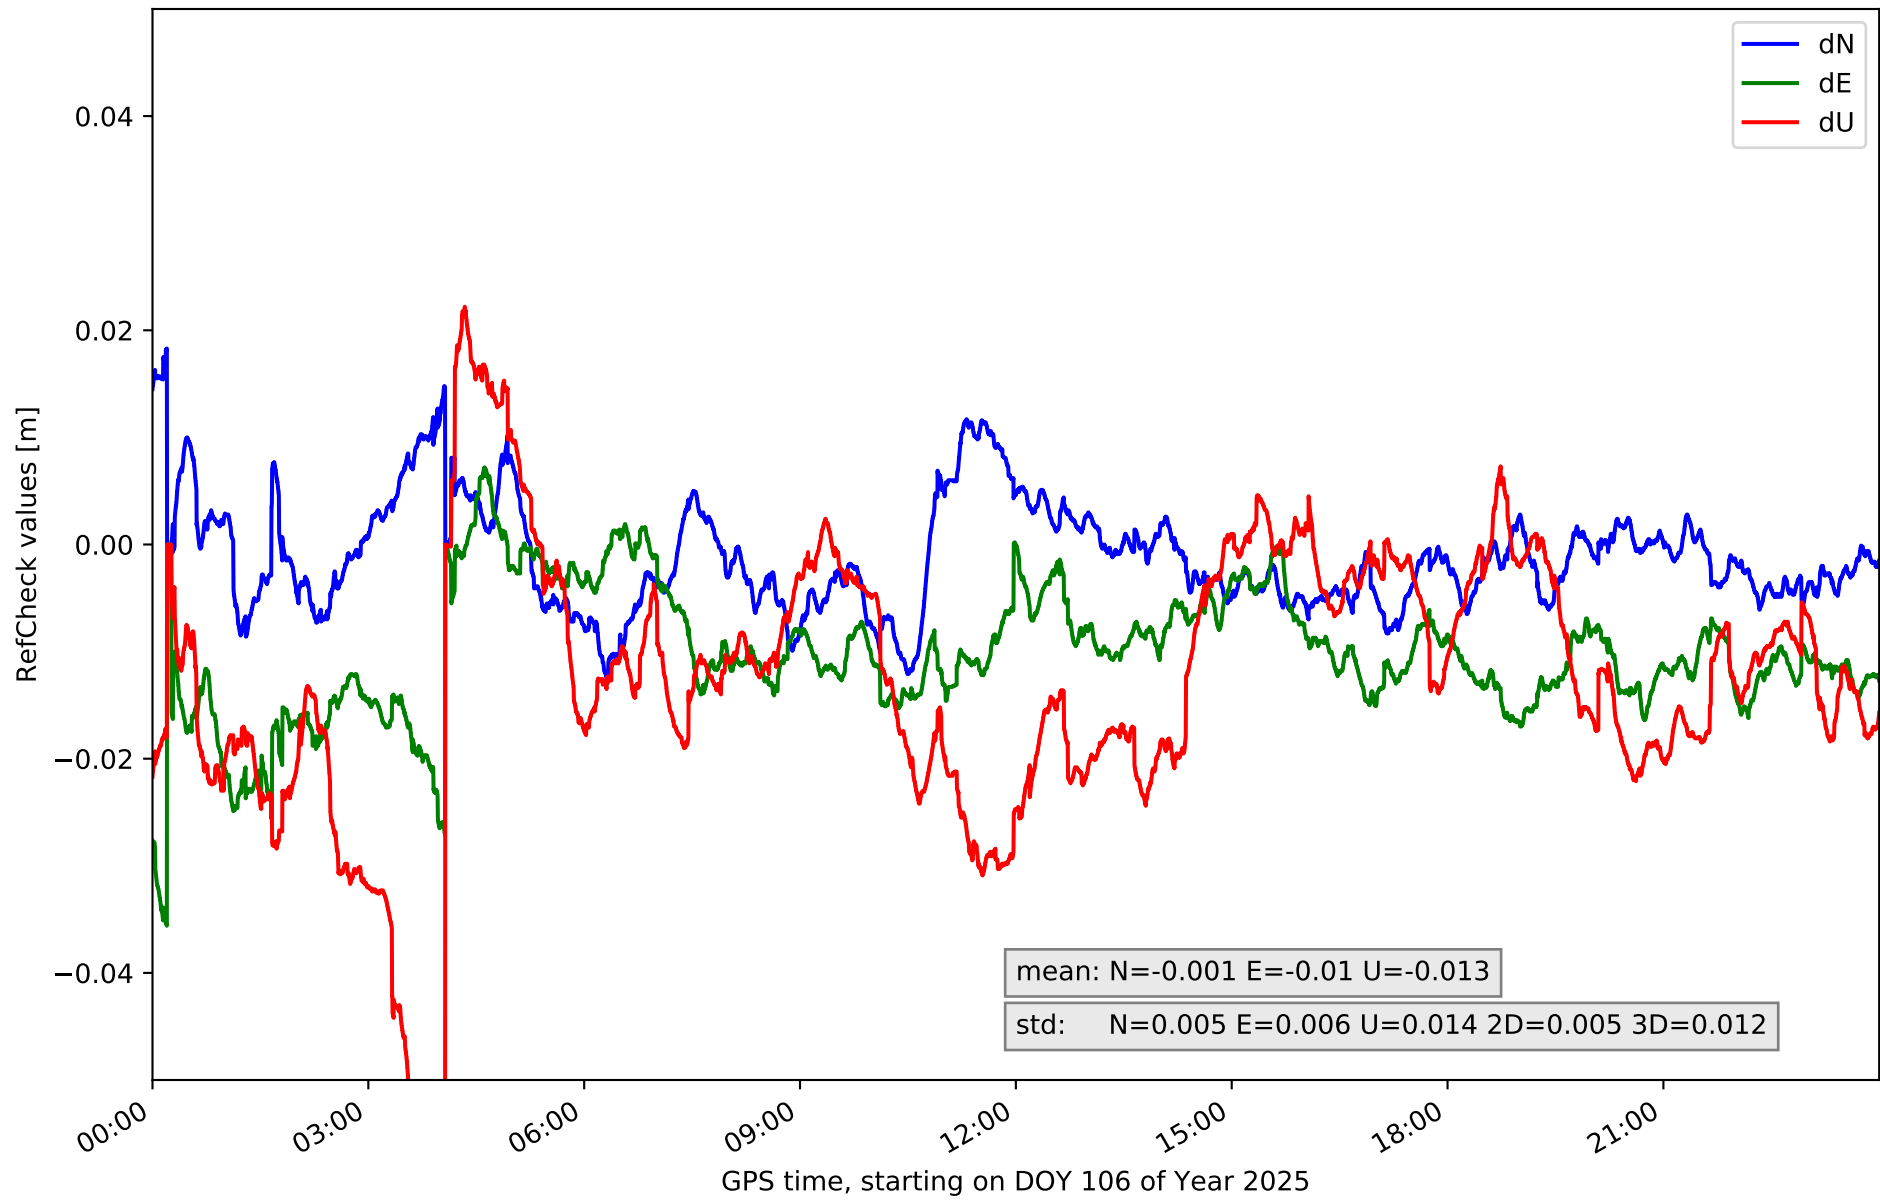


RefCheck for station TN02 in network N32T

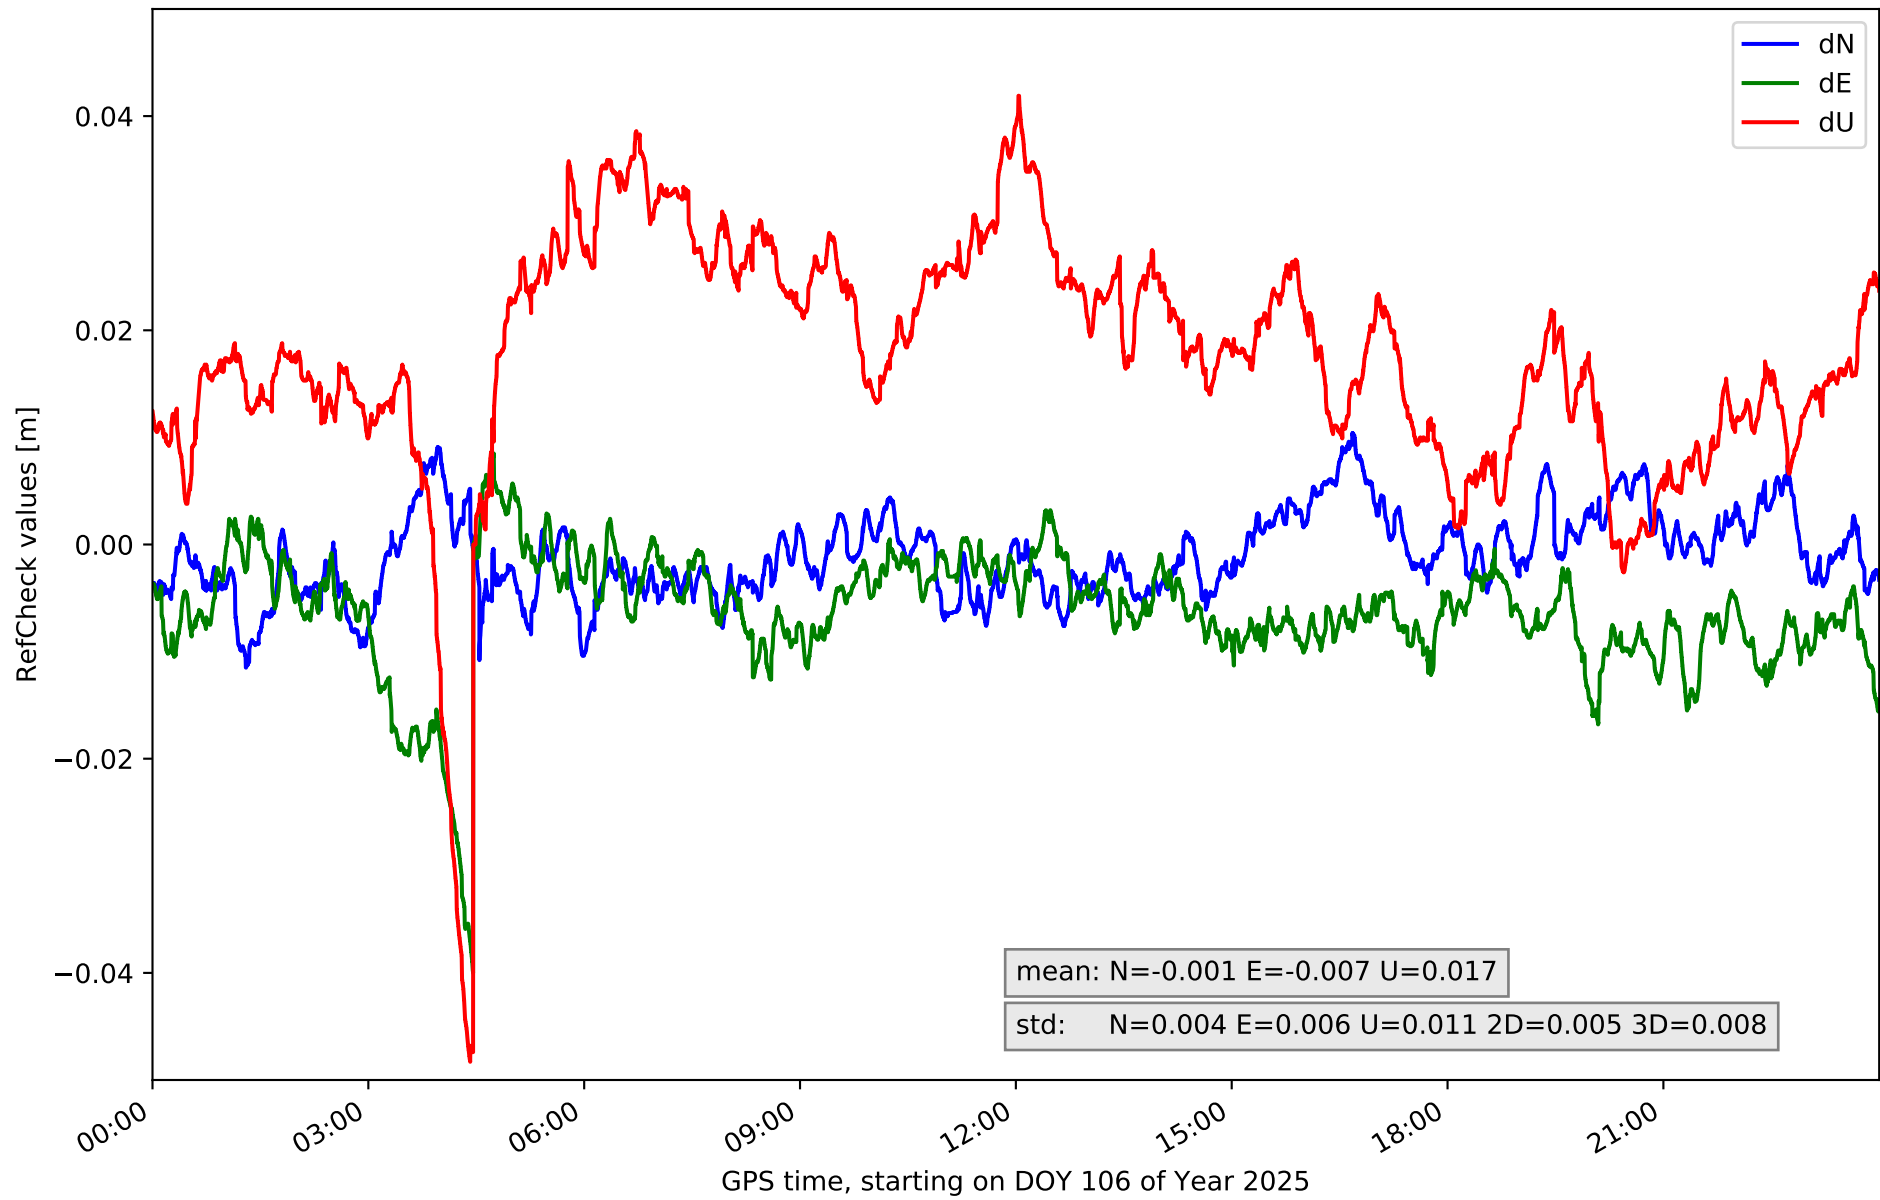


RefCheck for station TN03 in network N32T

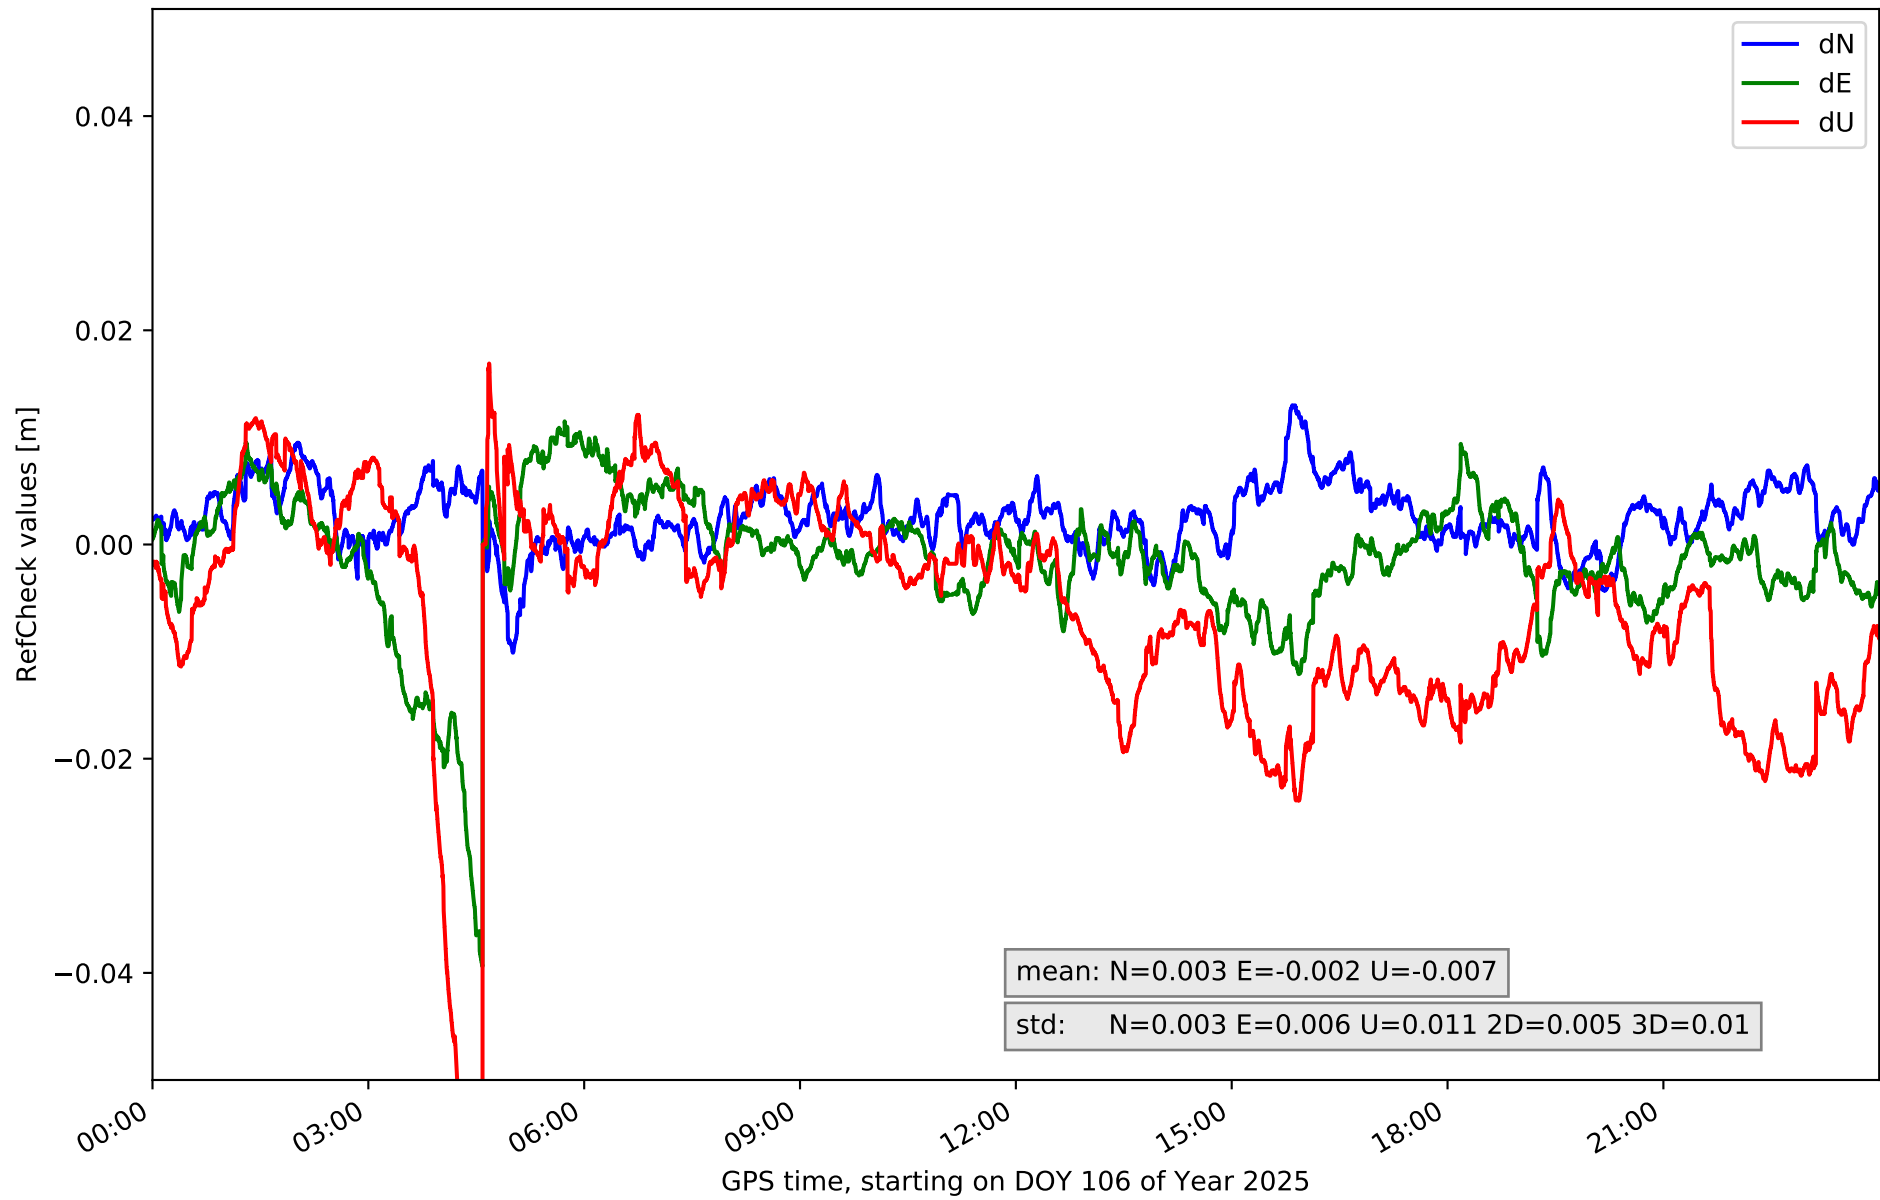


RefCheck for station TN06 in network N32T

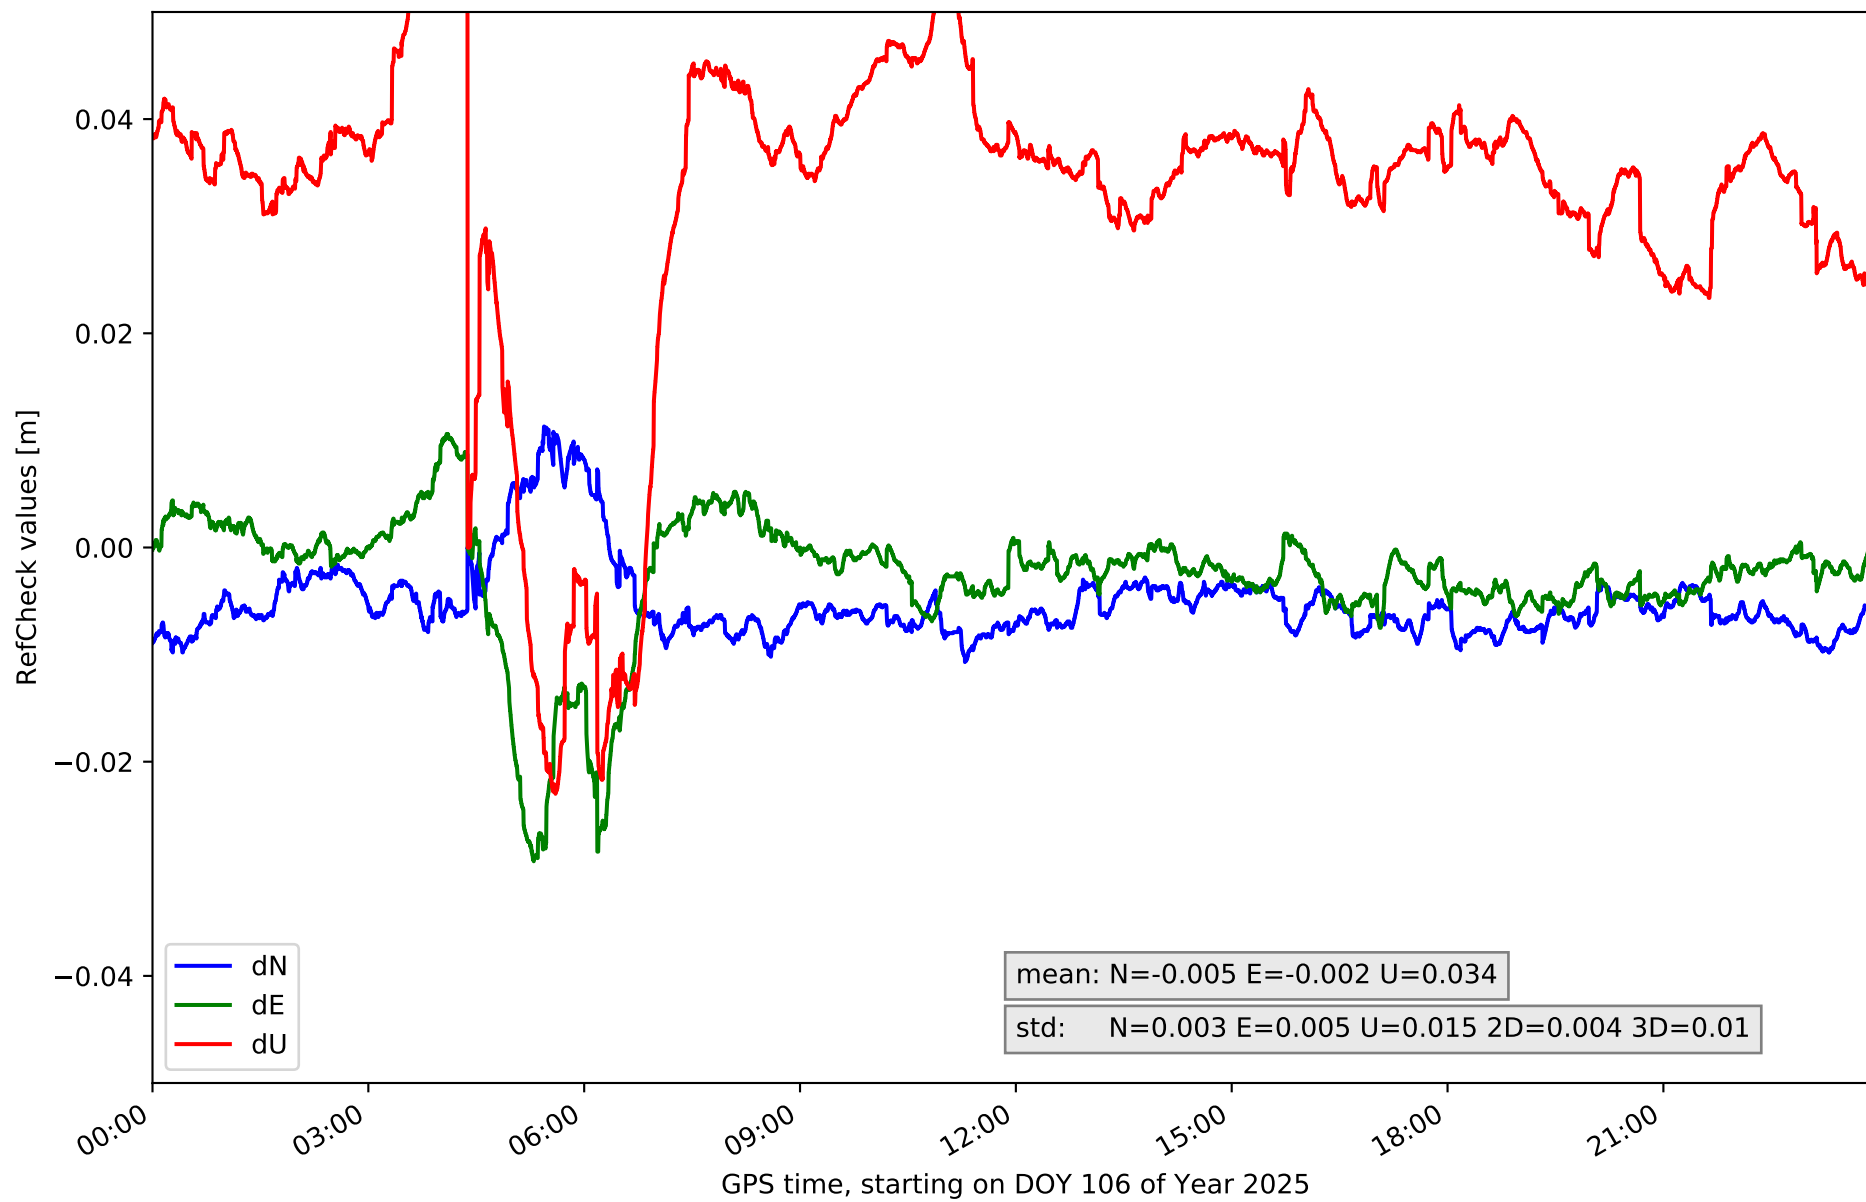

RefCheck for station TN09 in network N32T

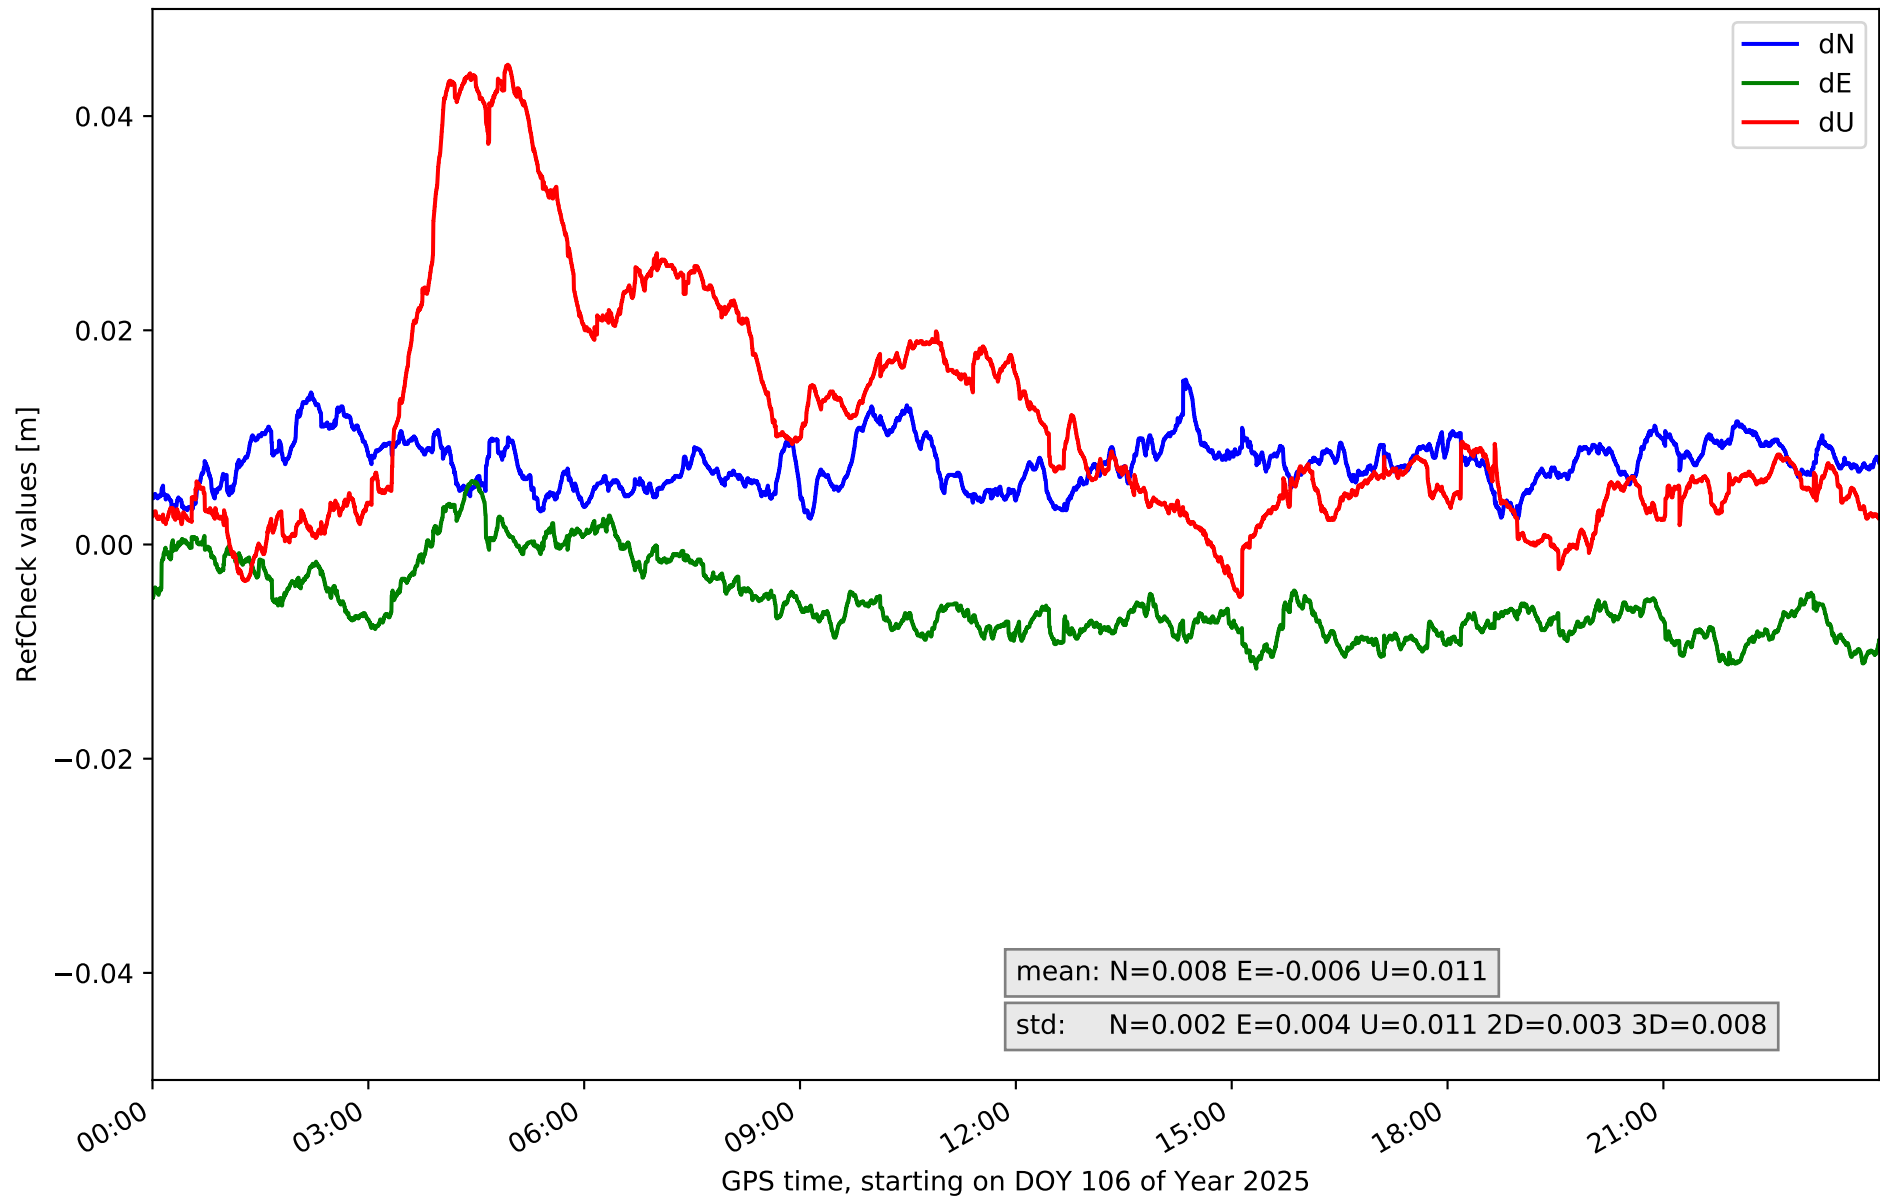

RefCheck for station TE11 in network N32T

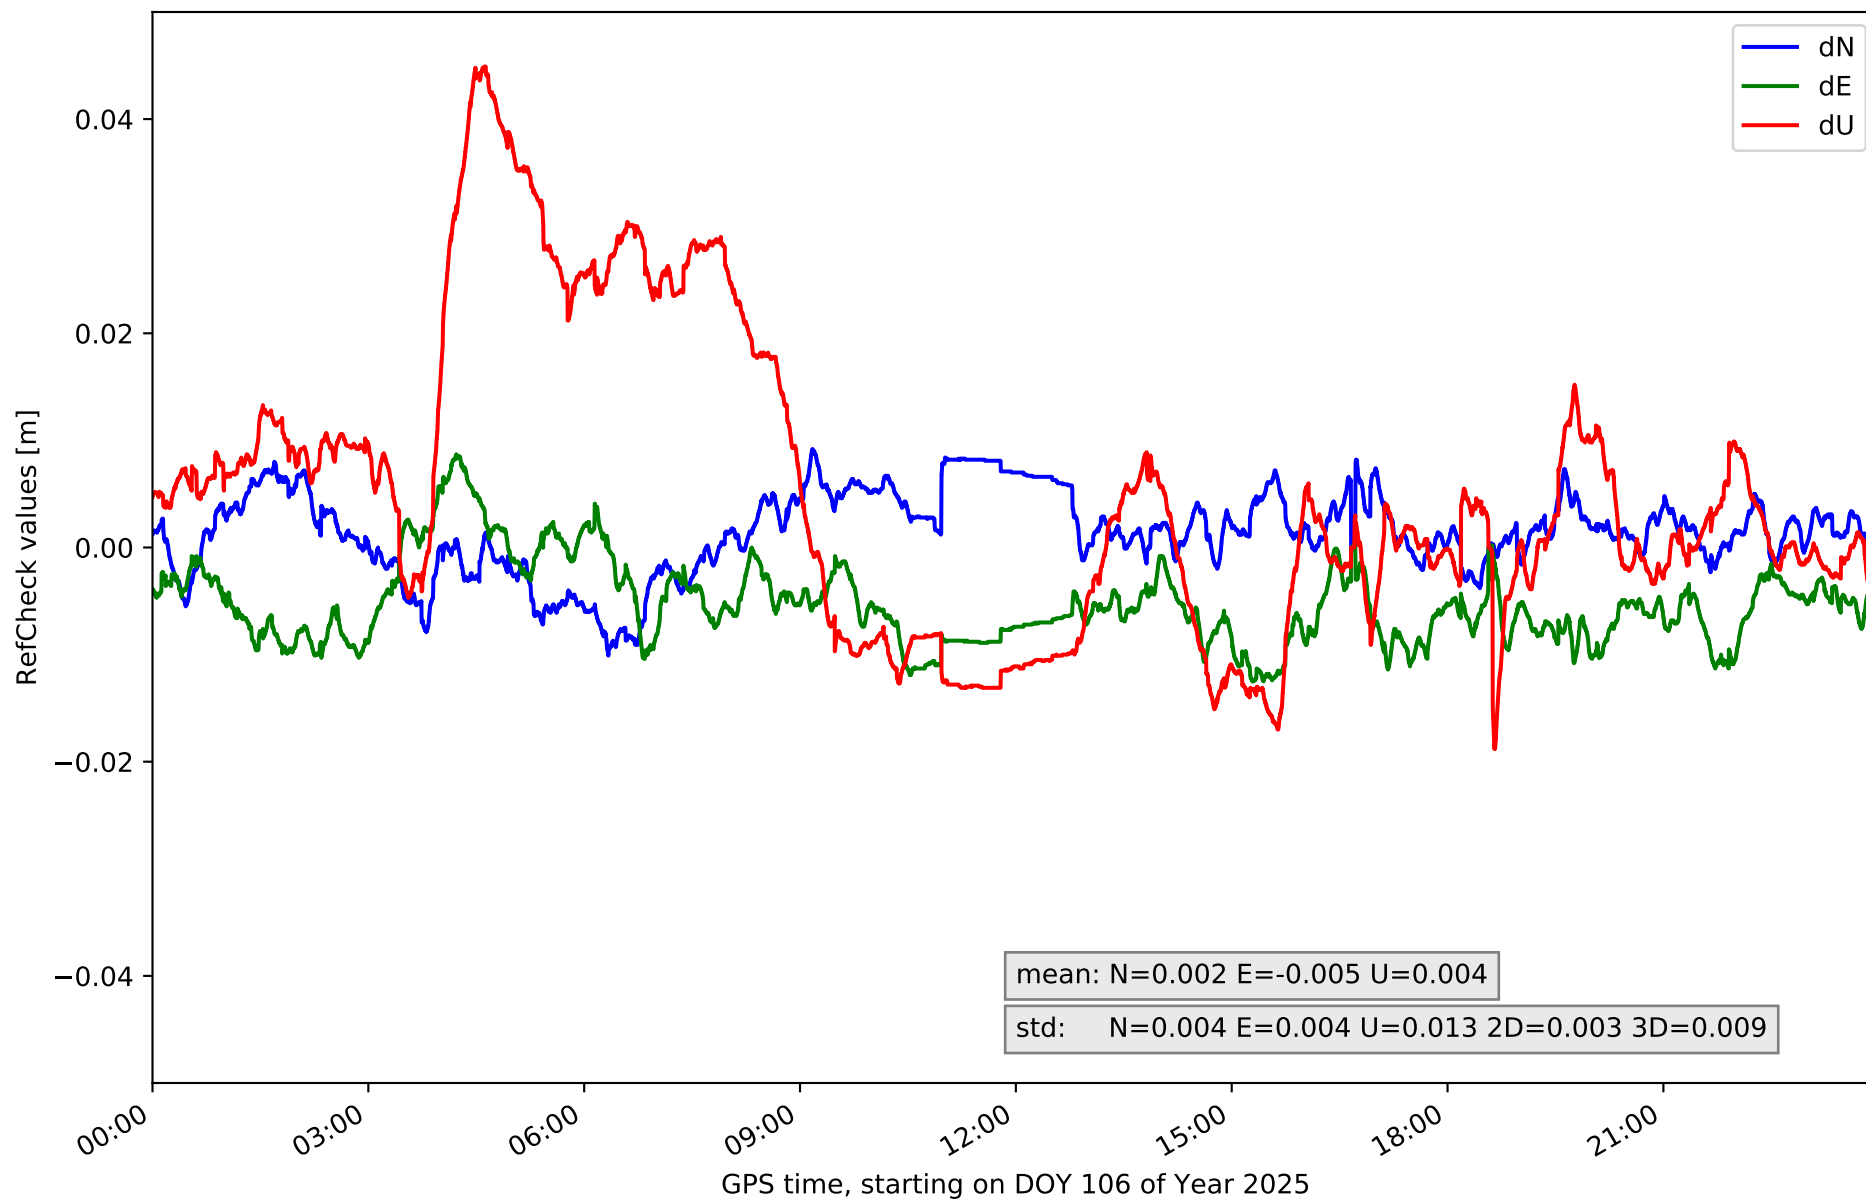

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.006	0.025	0.005	-0.006	0.019	0.005	-0.08	0.009	0.02	0.004	0.016	27858	69.7	17941	44.9
EH02	-0.005	0.012	0.003	-0.0	0.04	0.006	-0.008	0.049	0.01	0.006	0.01	35540	88.9	21540	53.9
GOM1	-0.038	0.006	0.006	-0.014	0.016	0.006	-0.028	0.038	0.012	0.005	0.008	10292	25.8	7261	18.2
IZAN	-0.01	0.009	0.003	-0.01	0.007	0.004	-0.016	0.041	0.011	0.002	0.008	243	0.6	3502	8.8
LP01	-0.019	-0.003	0.003	-0.001	0.023	0.005	-0.01	0.036	0.008	0.004	0.006	37102	92.8	17301	43.3
LP03	-0.028	0.009	0.006	-0.007	0.025	0.006	-0.031	0.033	0.013	0.006	0.008	22935	57.4	13619	34.1
LPAL	-0.021	-0.002	0.003	0.001	0.022	0.004	-0.021	0.021	0.008	0.004	0.005	28409	71.1	6822	17.1
LRES	-0.002	0.033	0.005	-0.011	0.022	0.005	-0.07	0.006	0.019	0.004	0.017	32700	81.8	14557	36.4
TN01	-0.012	0.018	0.005	-0.036	0.007	0.006	-0.08	0.022	0.014	0.005	0.012	25359	63.5	16057	40.2
TN02	-0.011	0.01	0.004	-0.04	0.009	0.006	-0.048	0.042	0.011	0.005	0.008	9402	23.5	19322	48.4
TN03	-0.01	0.013	0.003	-0.039	0.011	0.006	-0.07	0.017	0.011	0.005	0.01	4613	11.5	4233	10.6
TN06	-0.011	0.011	0.003	-0.029	0.011	0.005	-0.023	0.08	0.015	0.004	0.01	3664	9.2	38485	96.3
TN09	0.002	0.015	0.002	-0.012	0.006	0.004	-0.005	0.045	0.011	0.003	0.008	22326	55.9	8999	22.5
TE11	-0.01	0.009	0.004	-0.013	0.009	0.004	-0.019	0.045	0.013	0.003	0.009	7618	19.1	6298	15.8
Mean	-0.013	0.012	0.004	-0.016	0.016	0.005	-0.036	0.035	0.013	0.004	0.01	19147.2	47.9	13995.5	35.0
Min/Max	-0.038	0.033	0.006	-0.04	0.04	0.006	-0.08	0.08	0.02	0.006	0.017	37102	92.8	38485	96.3

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	91.7	92.6	91.4	91.9	89.7
considering satellites with dual-frequency fixed	88.7	89.8	86.6	89.5	87.6
considering all signals separately	88.5	89.6	86.6	89.7	85.5