

summary for network NT32

timeperiod chosen: from 2025-06-11-00:00:00 until 2025-06-11-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.2 seconds


average fixing percentage with threshold set to 0.3: 92.0 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

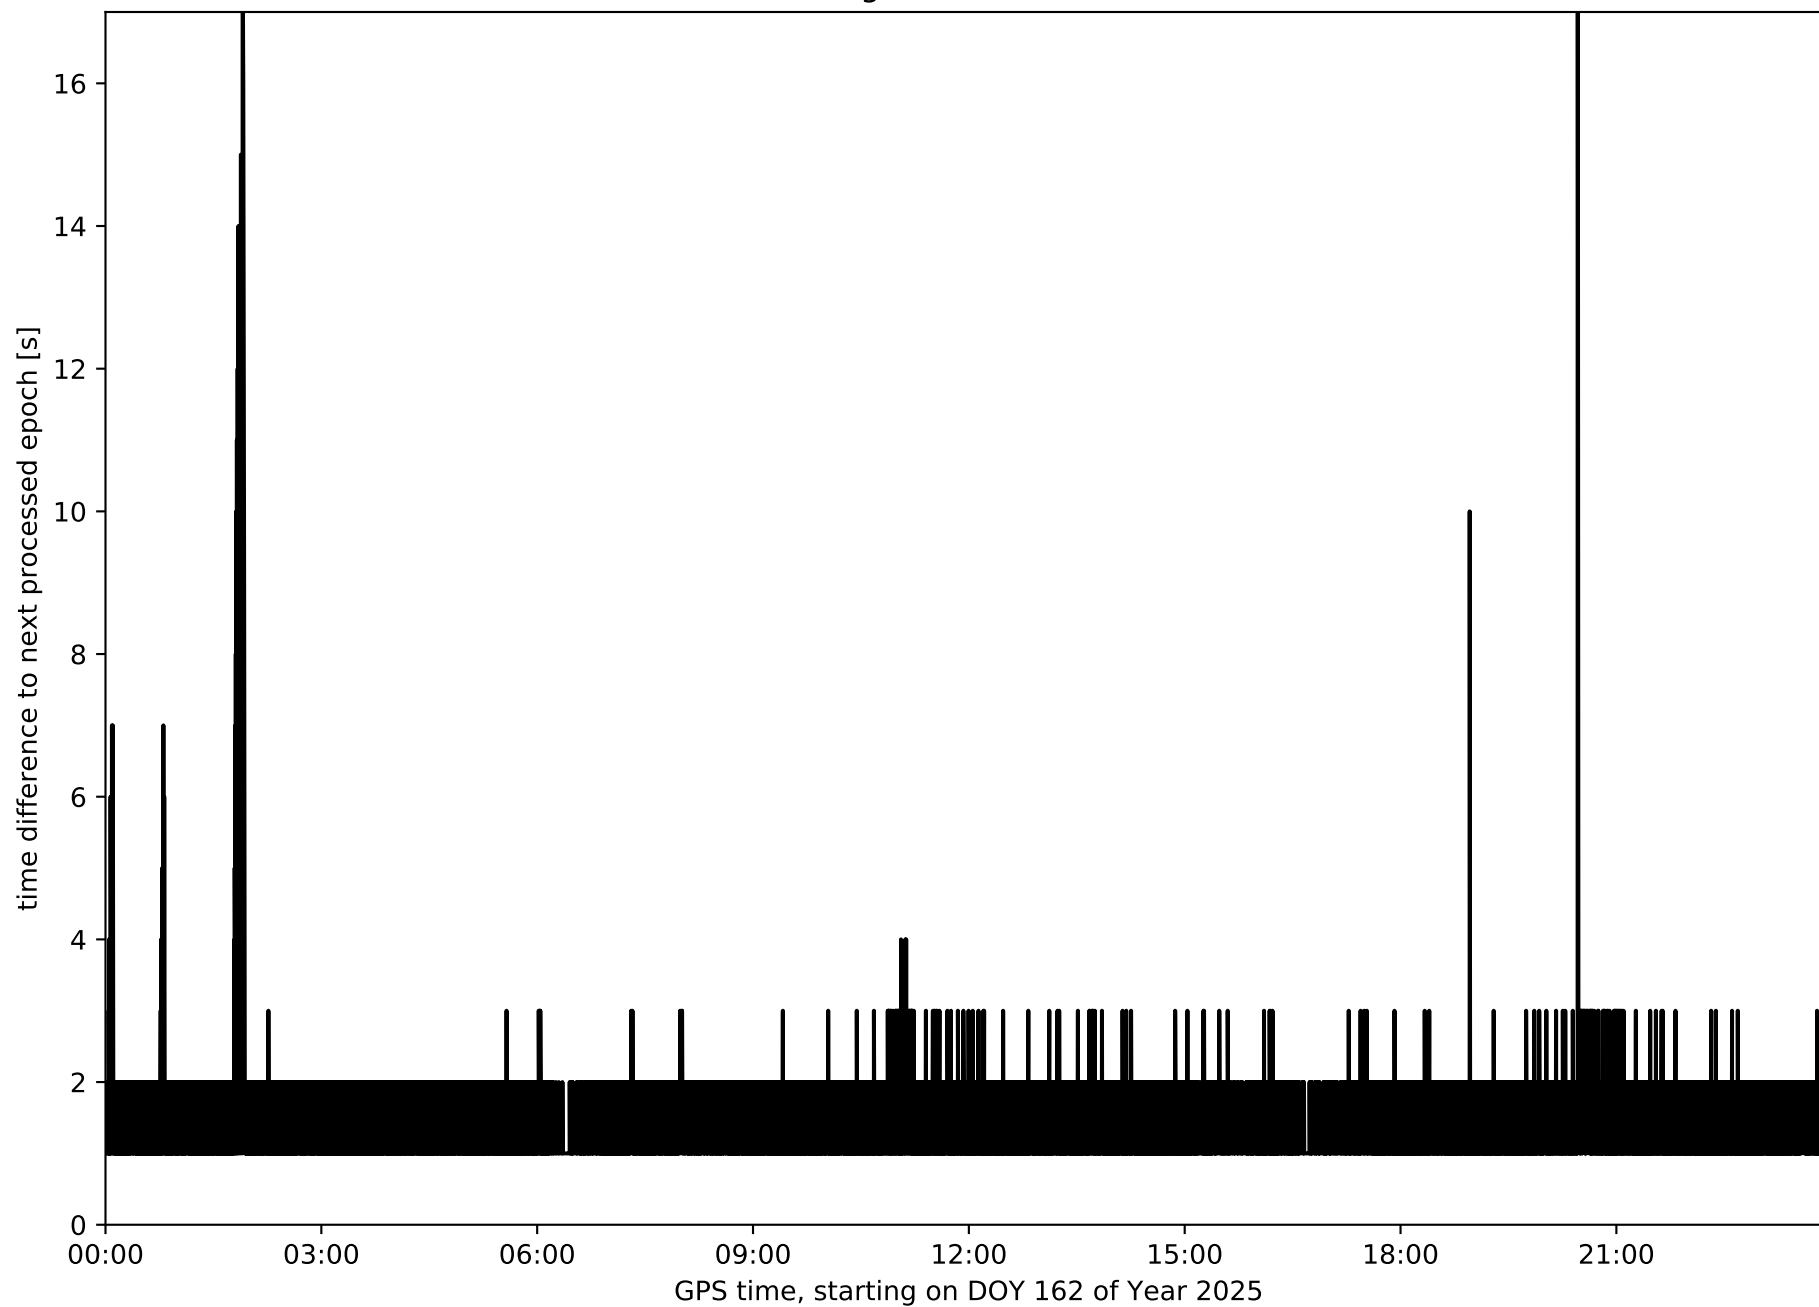


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

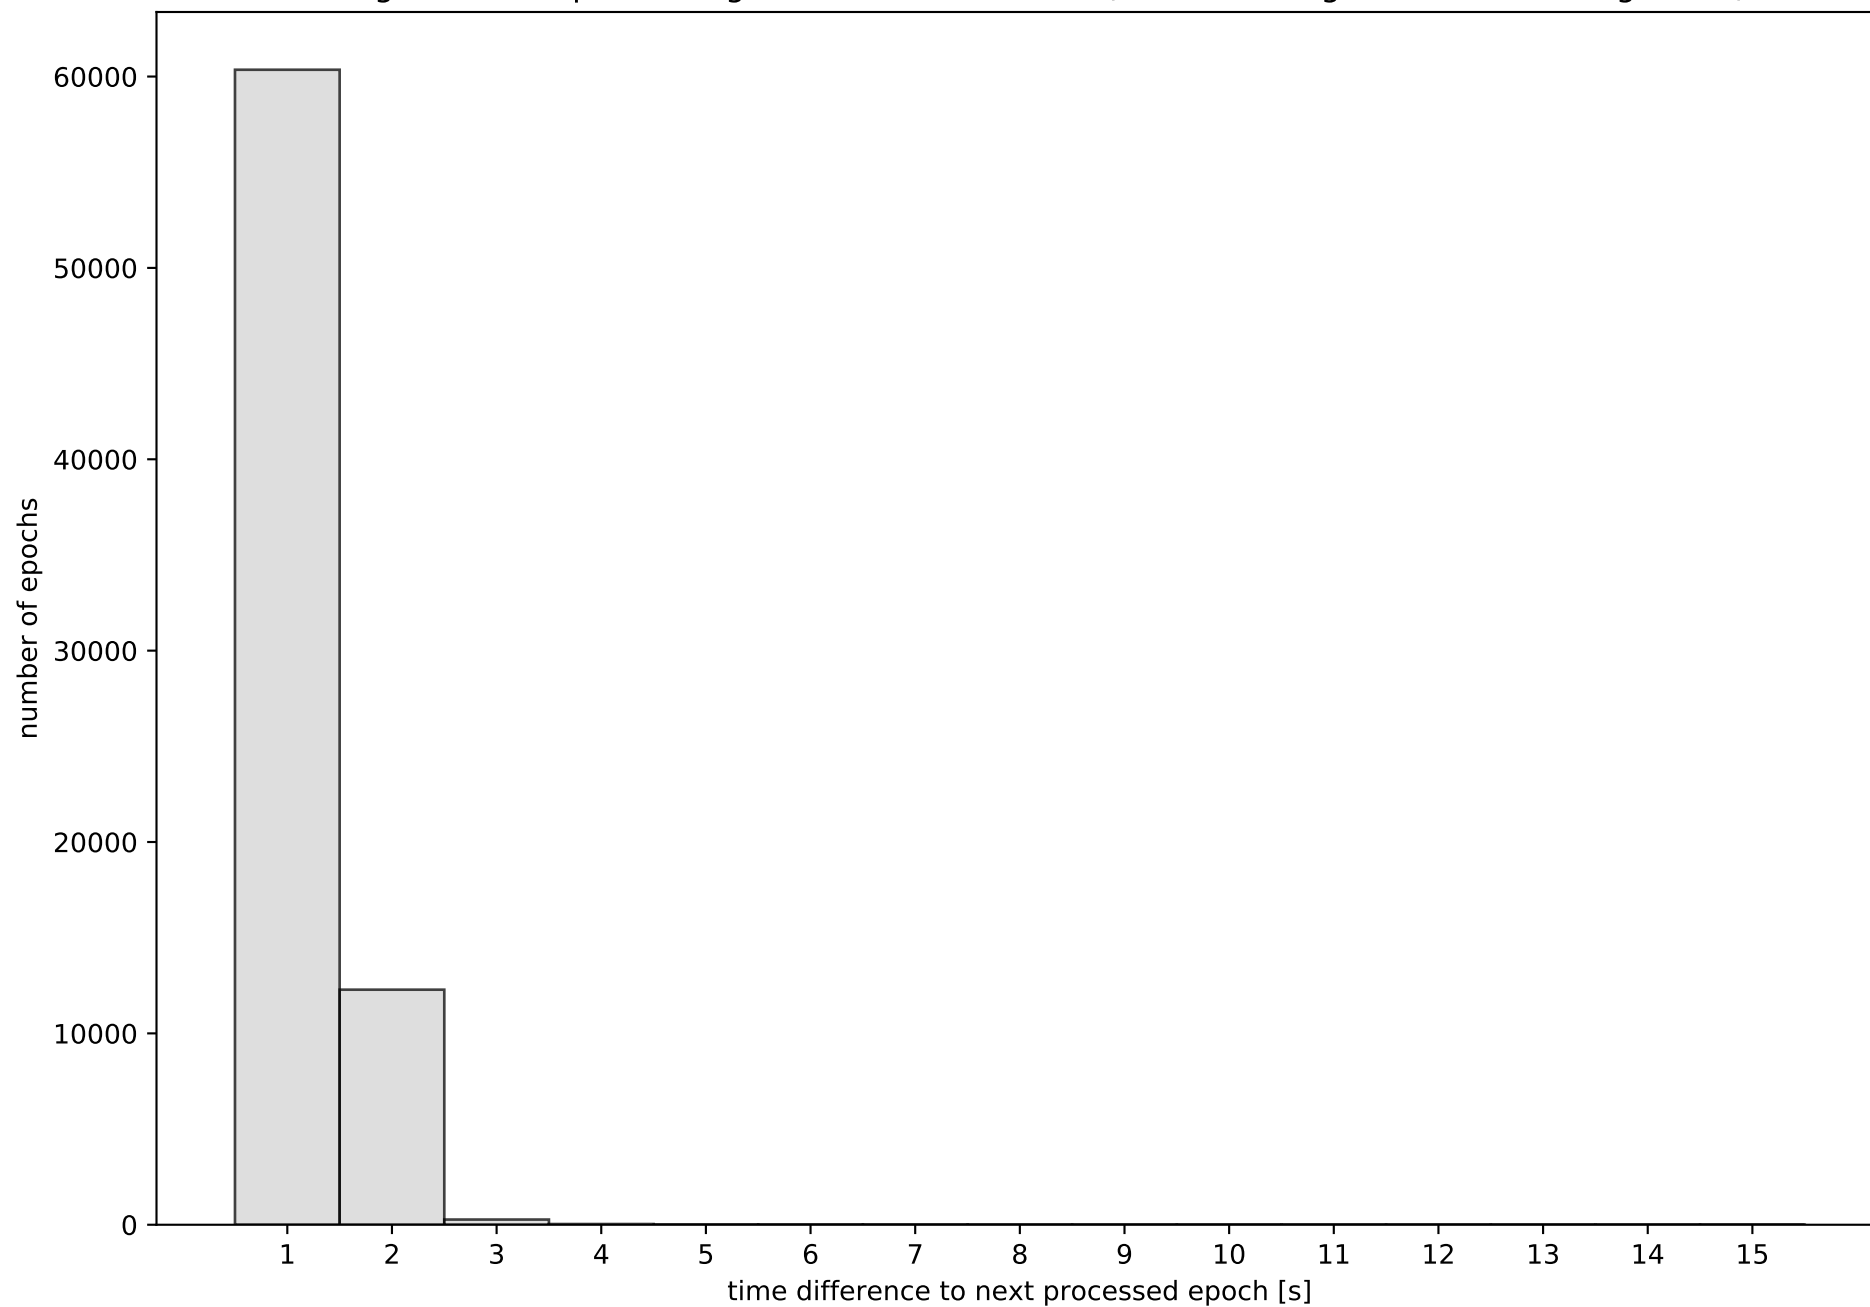


Network NT32 with threshold set to 0.3

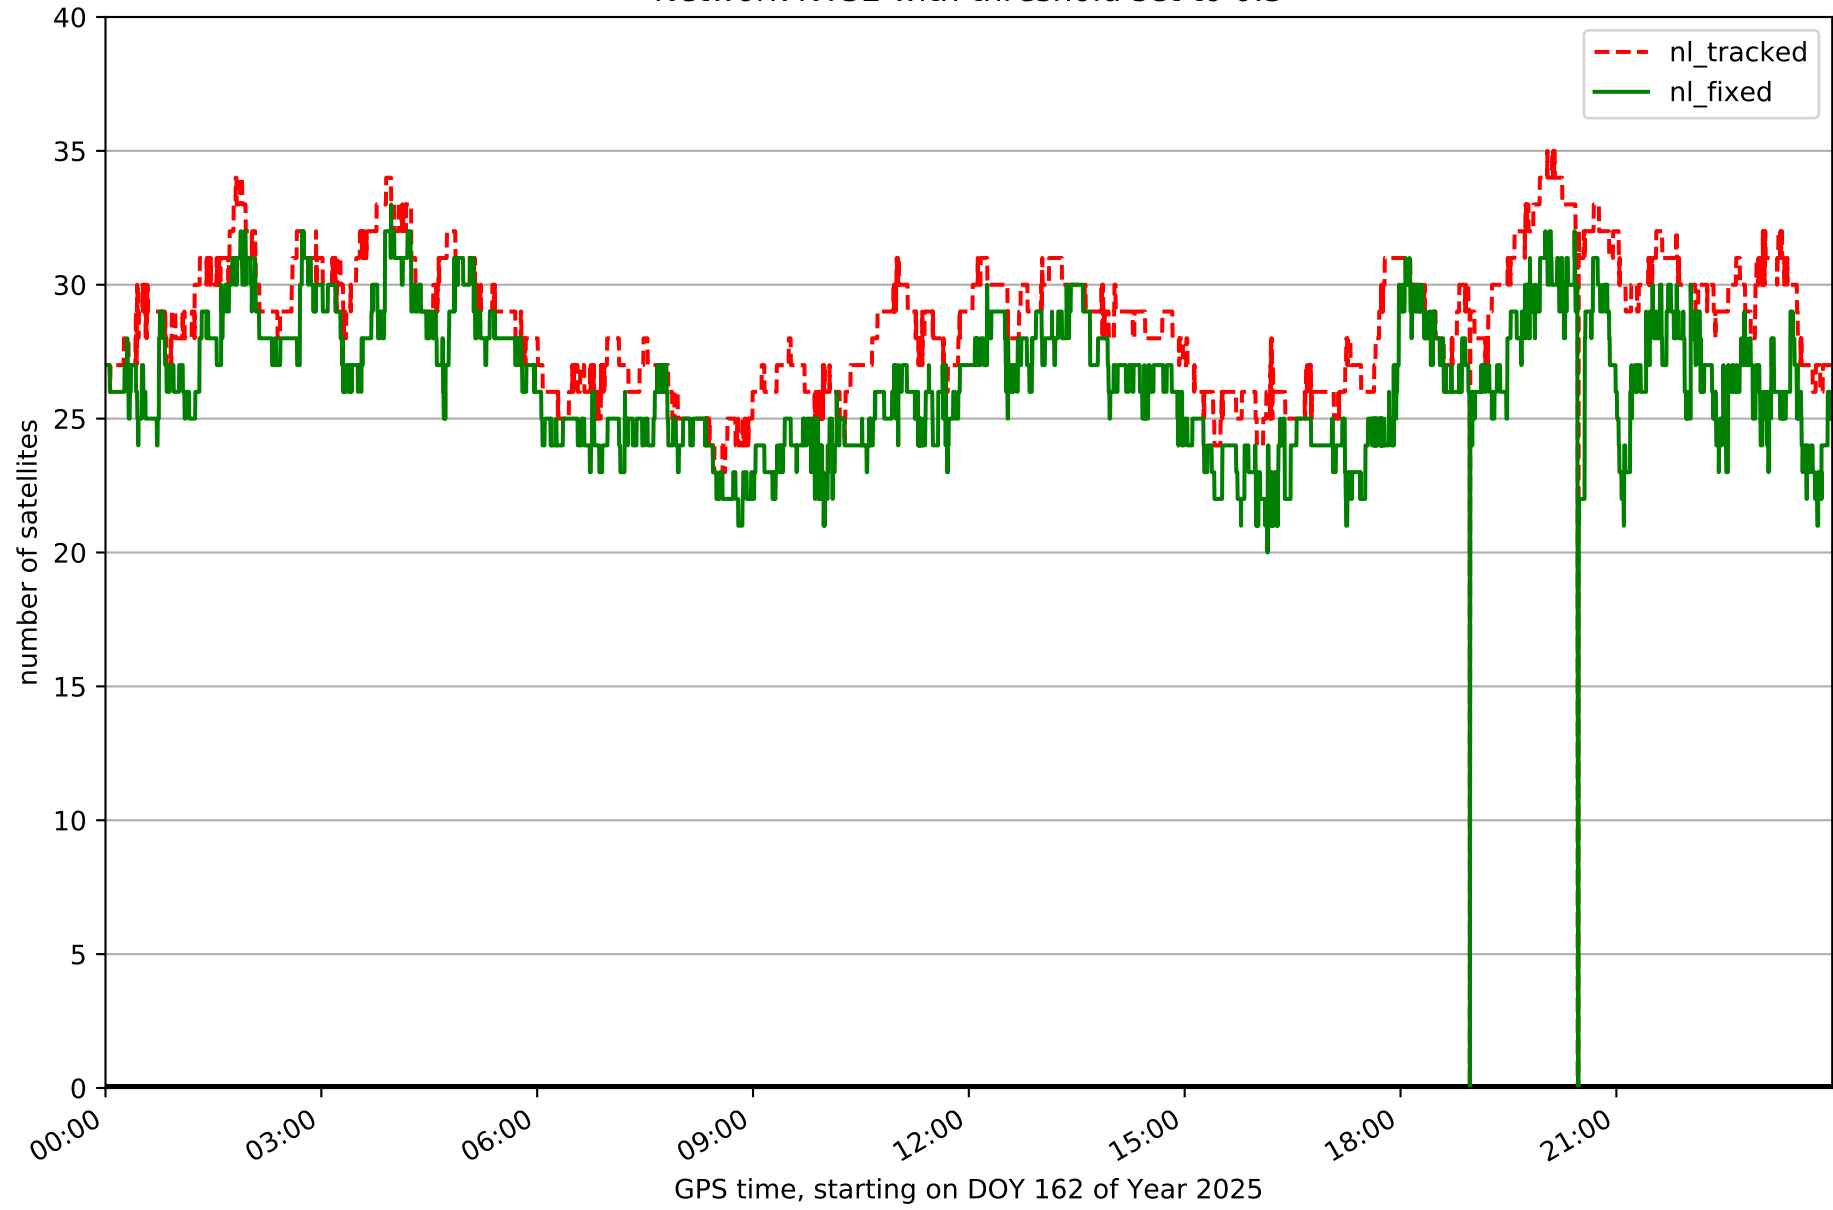


Fixing percentage of satellites in network NT32 with threshold set to 0.3

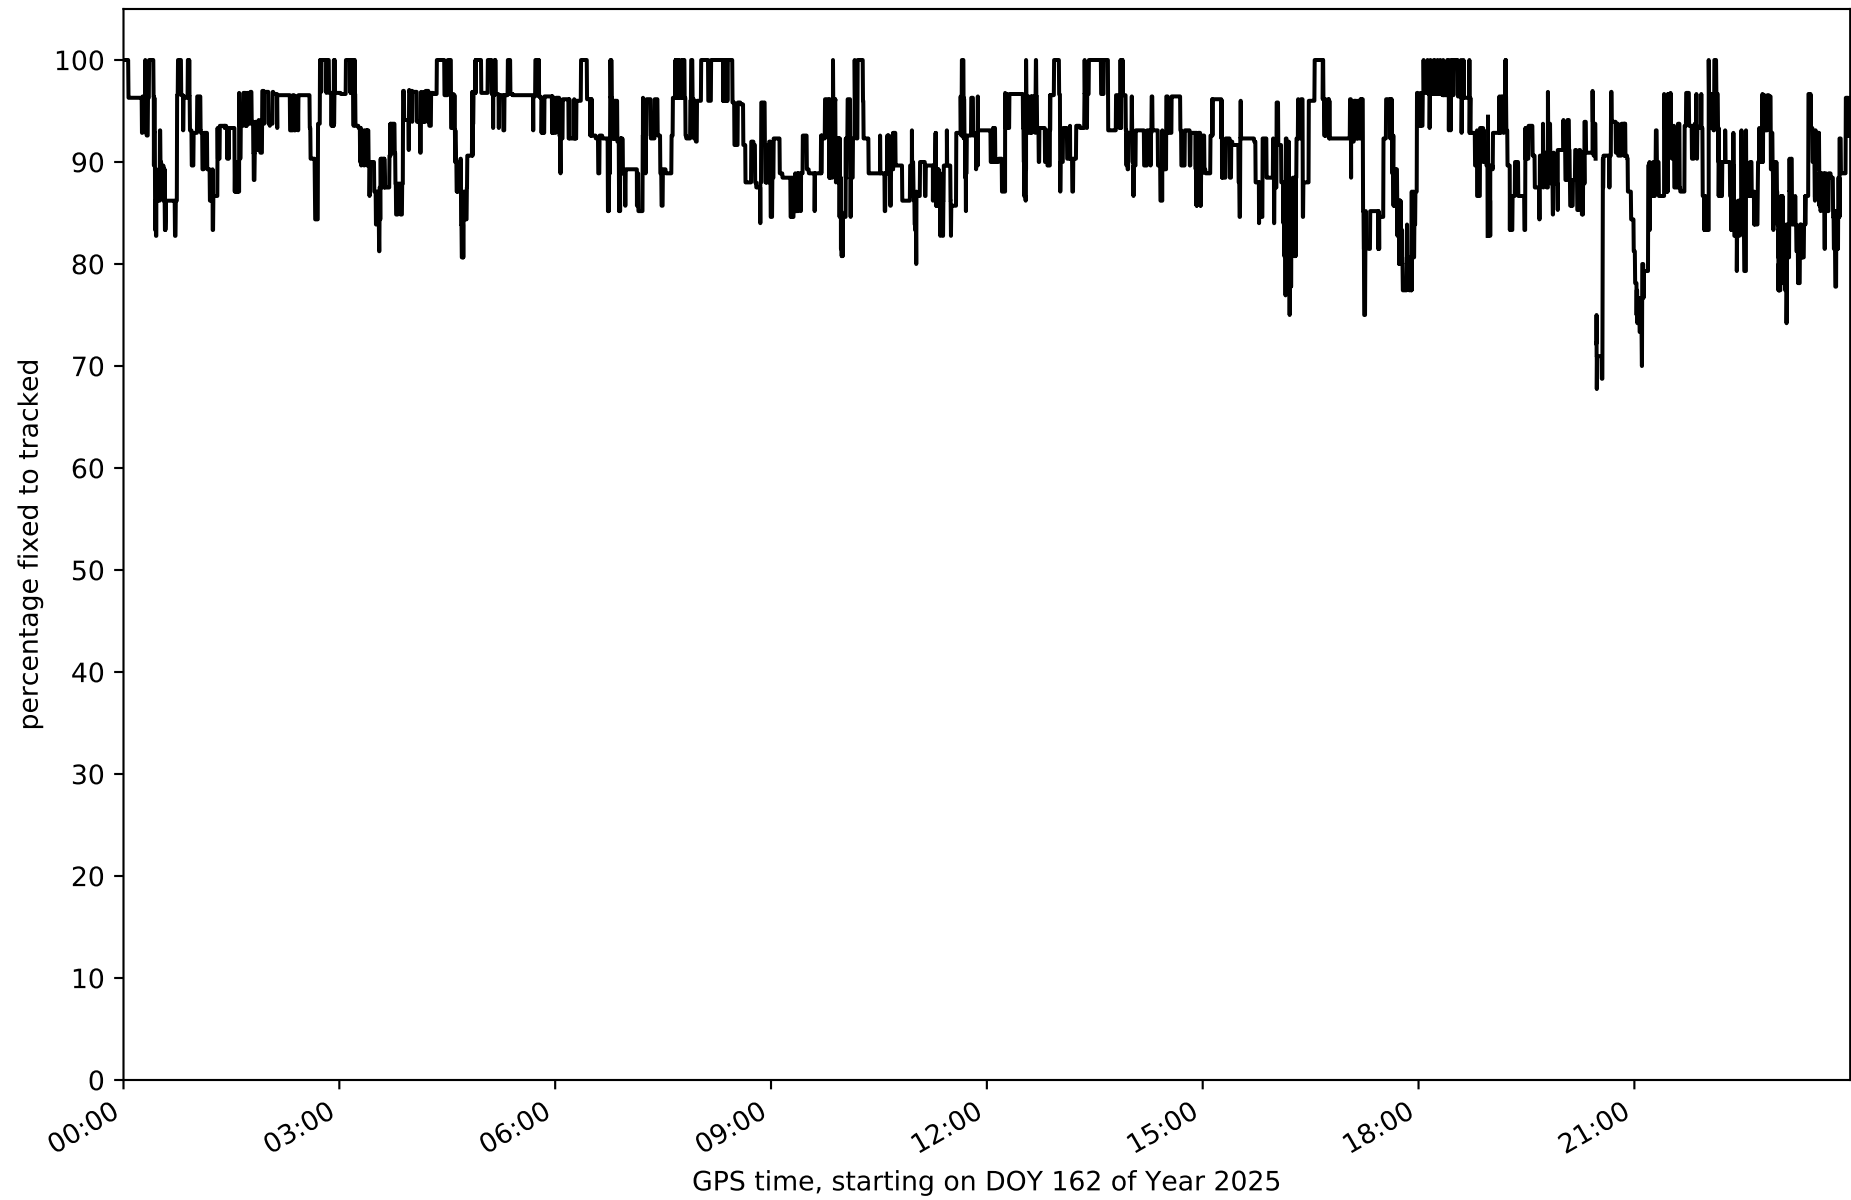


Network NT32 - only GPS with threshold set to 0.3

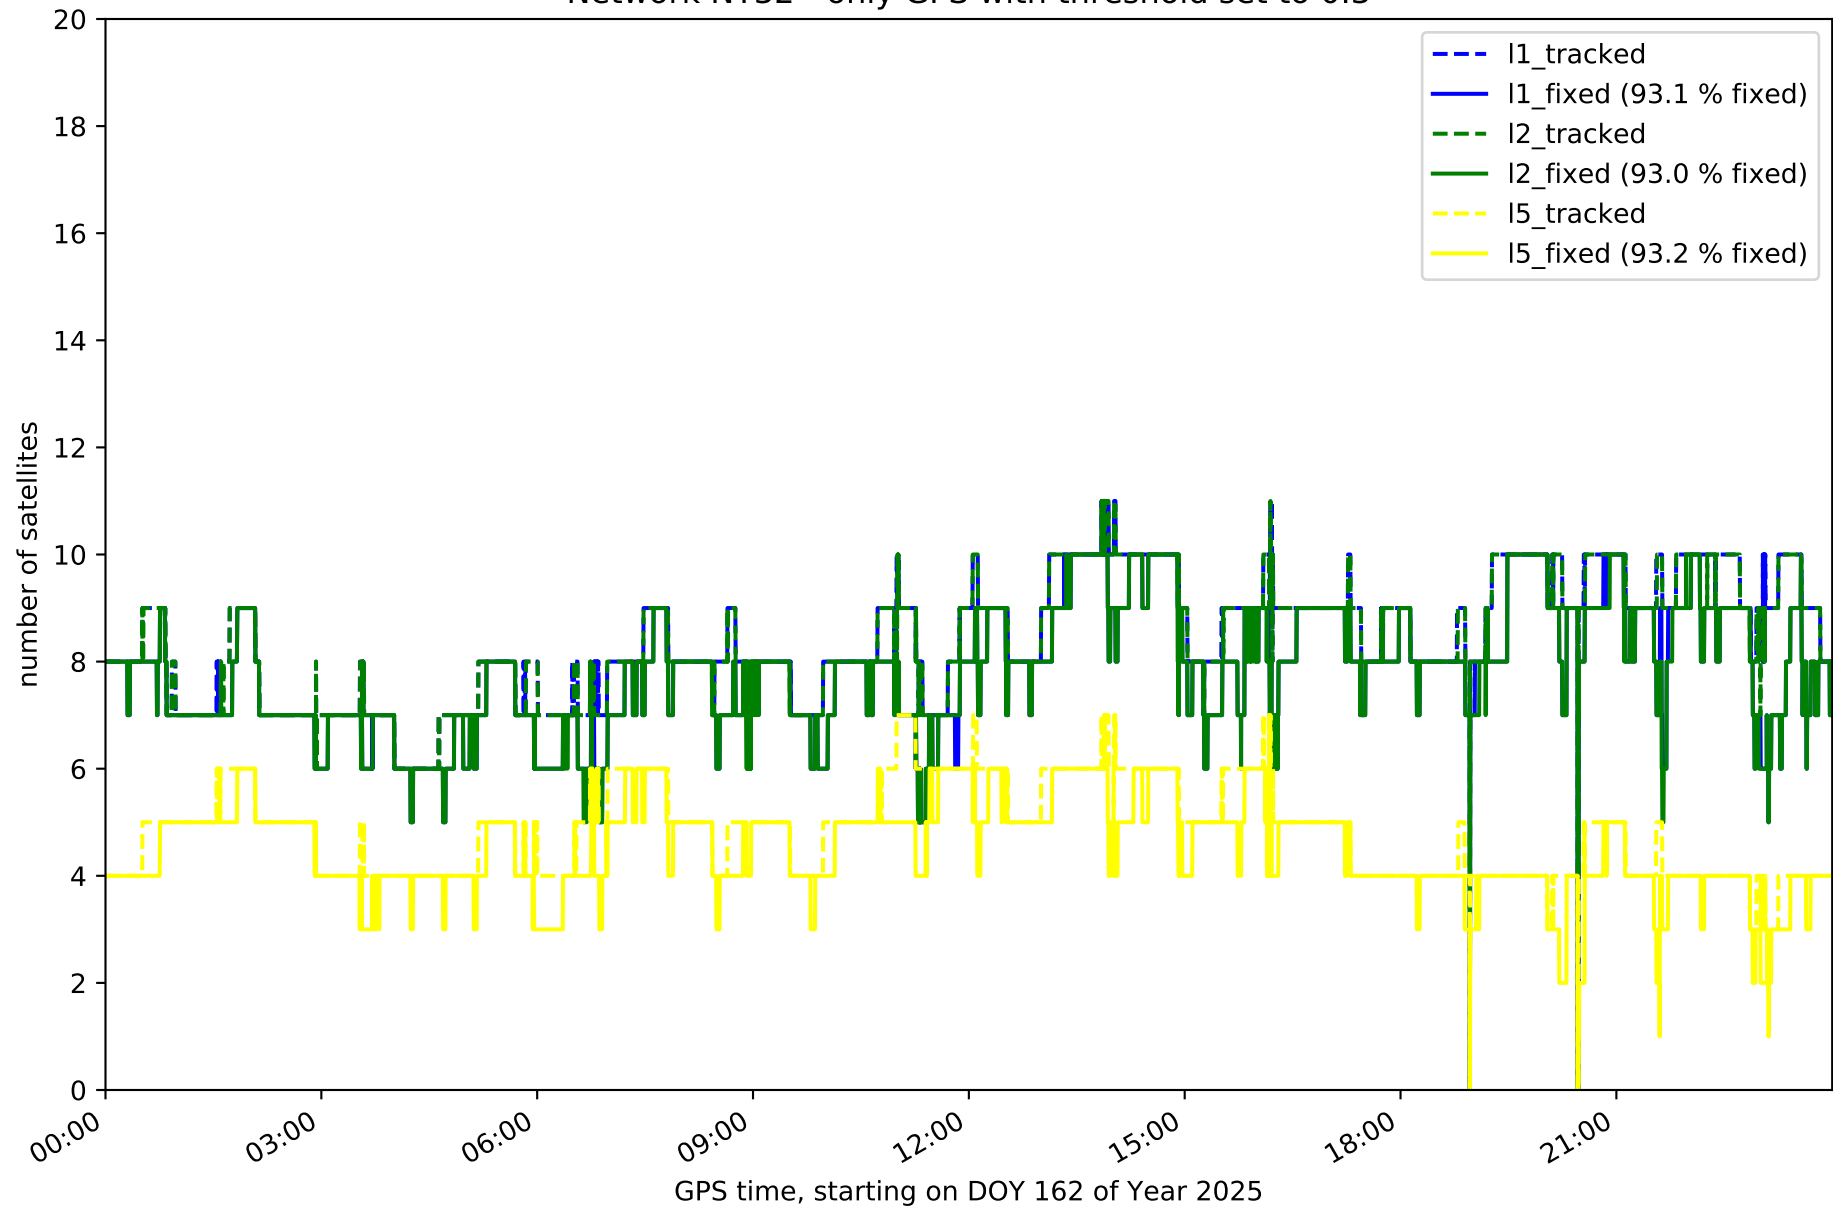


Network NT32 - only GLONASS with threshold set to 0.3

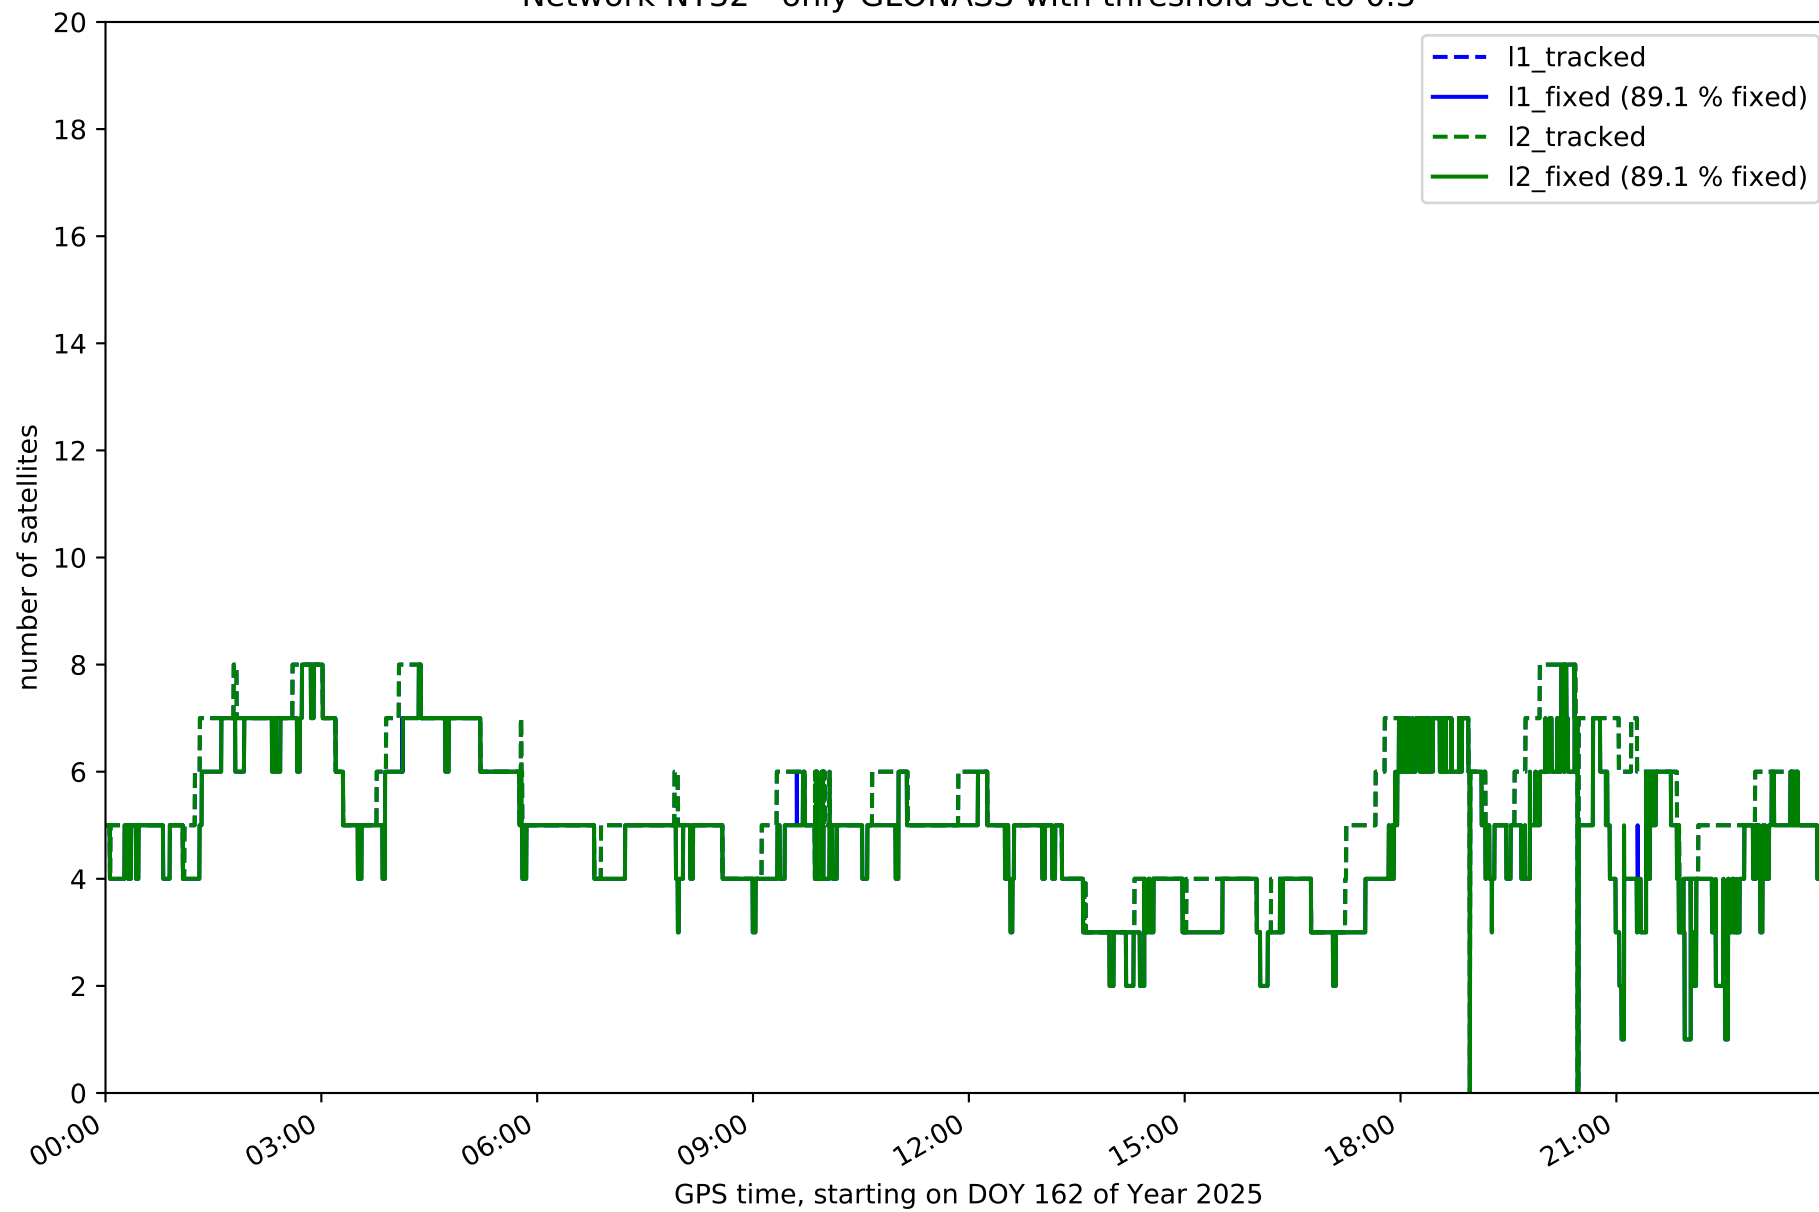


Network NT32 - only BDS with threshold set to 0.3

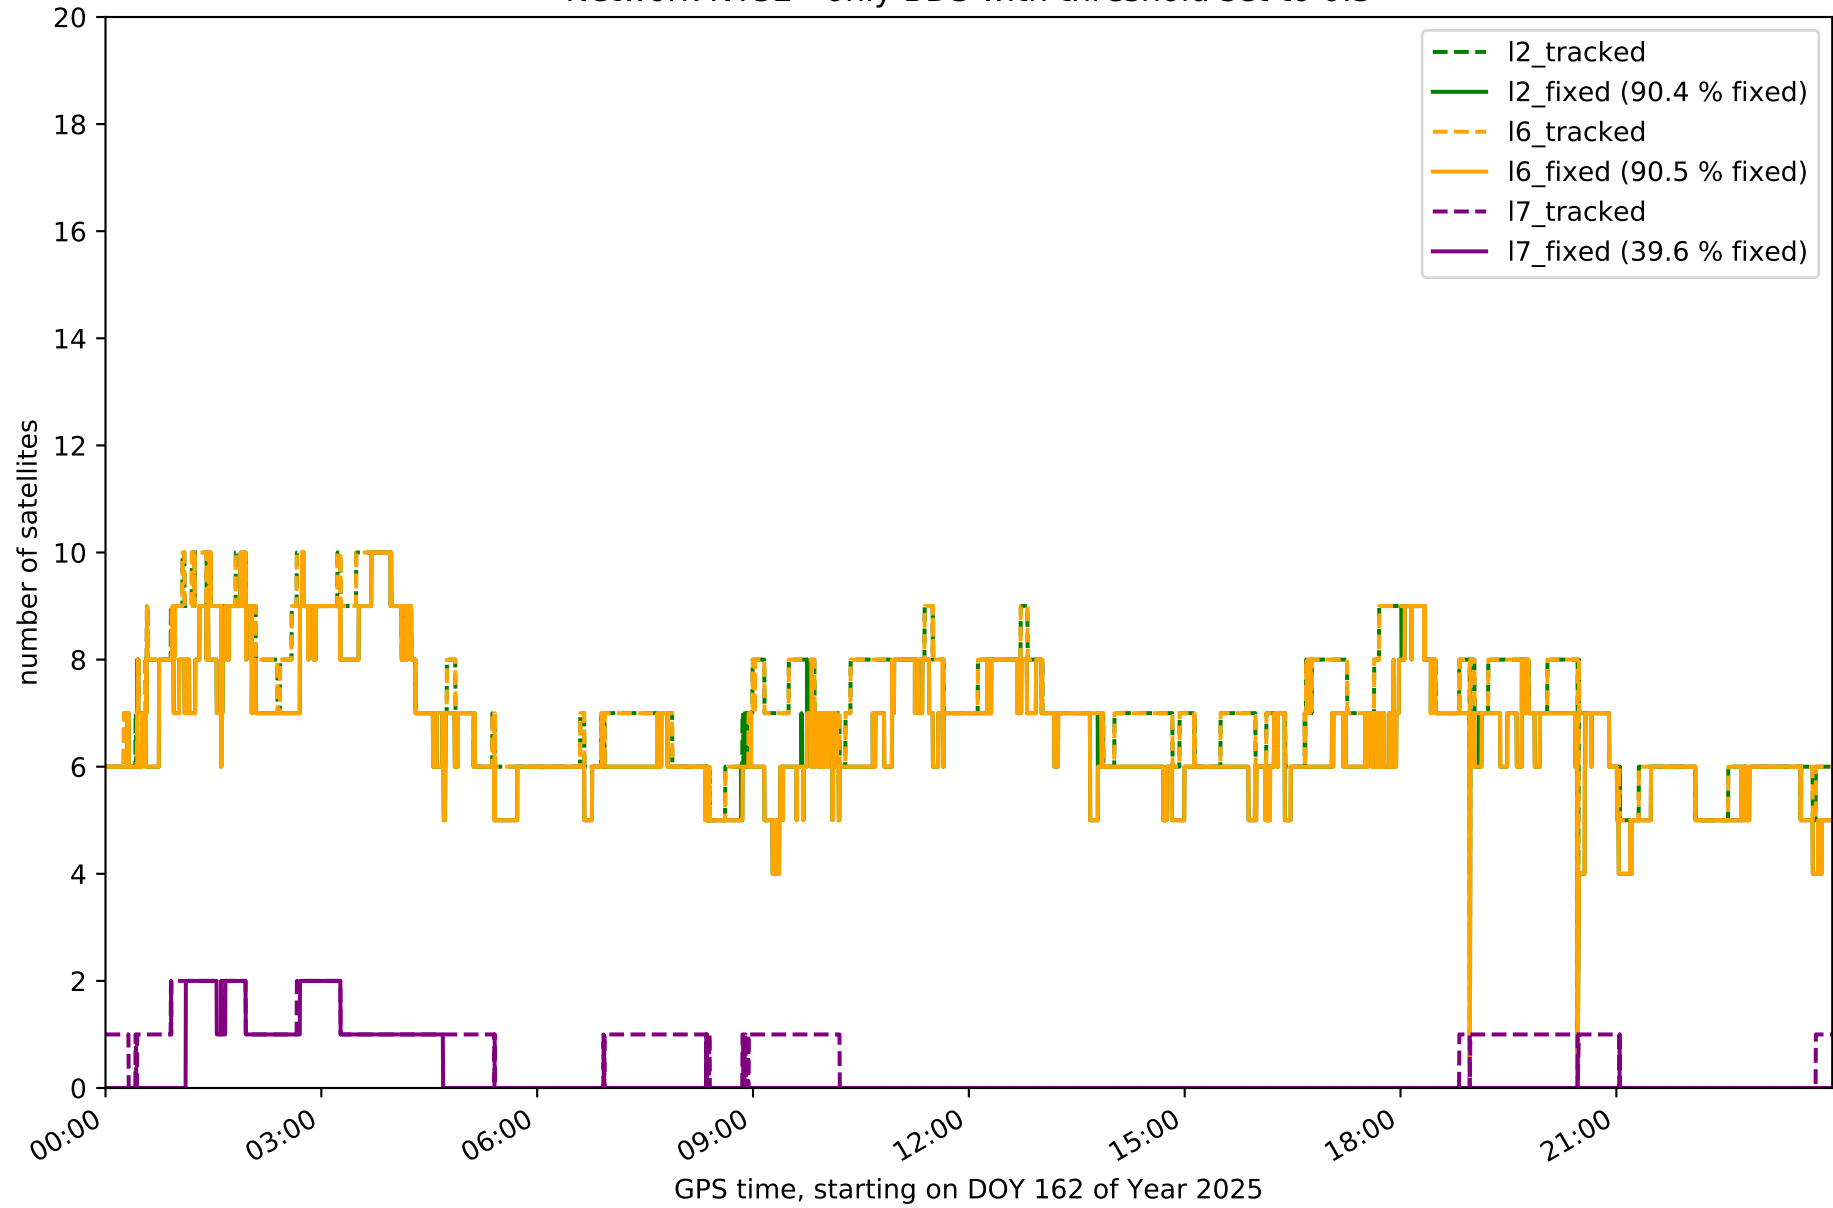


Network NT32 - only Galileo with threshold set to 0.3

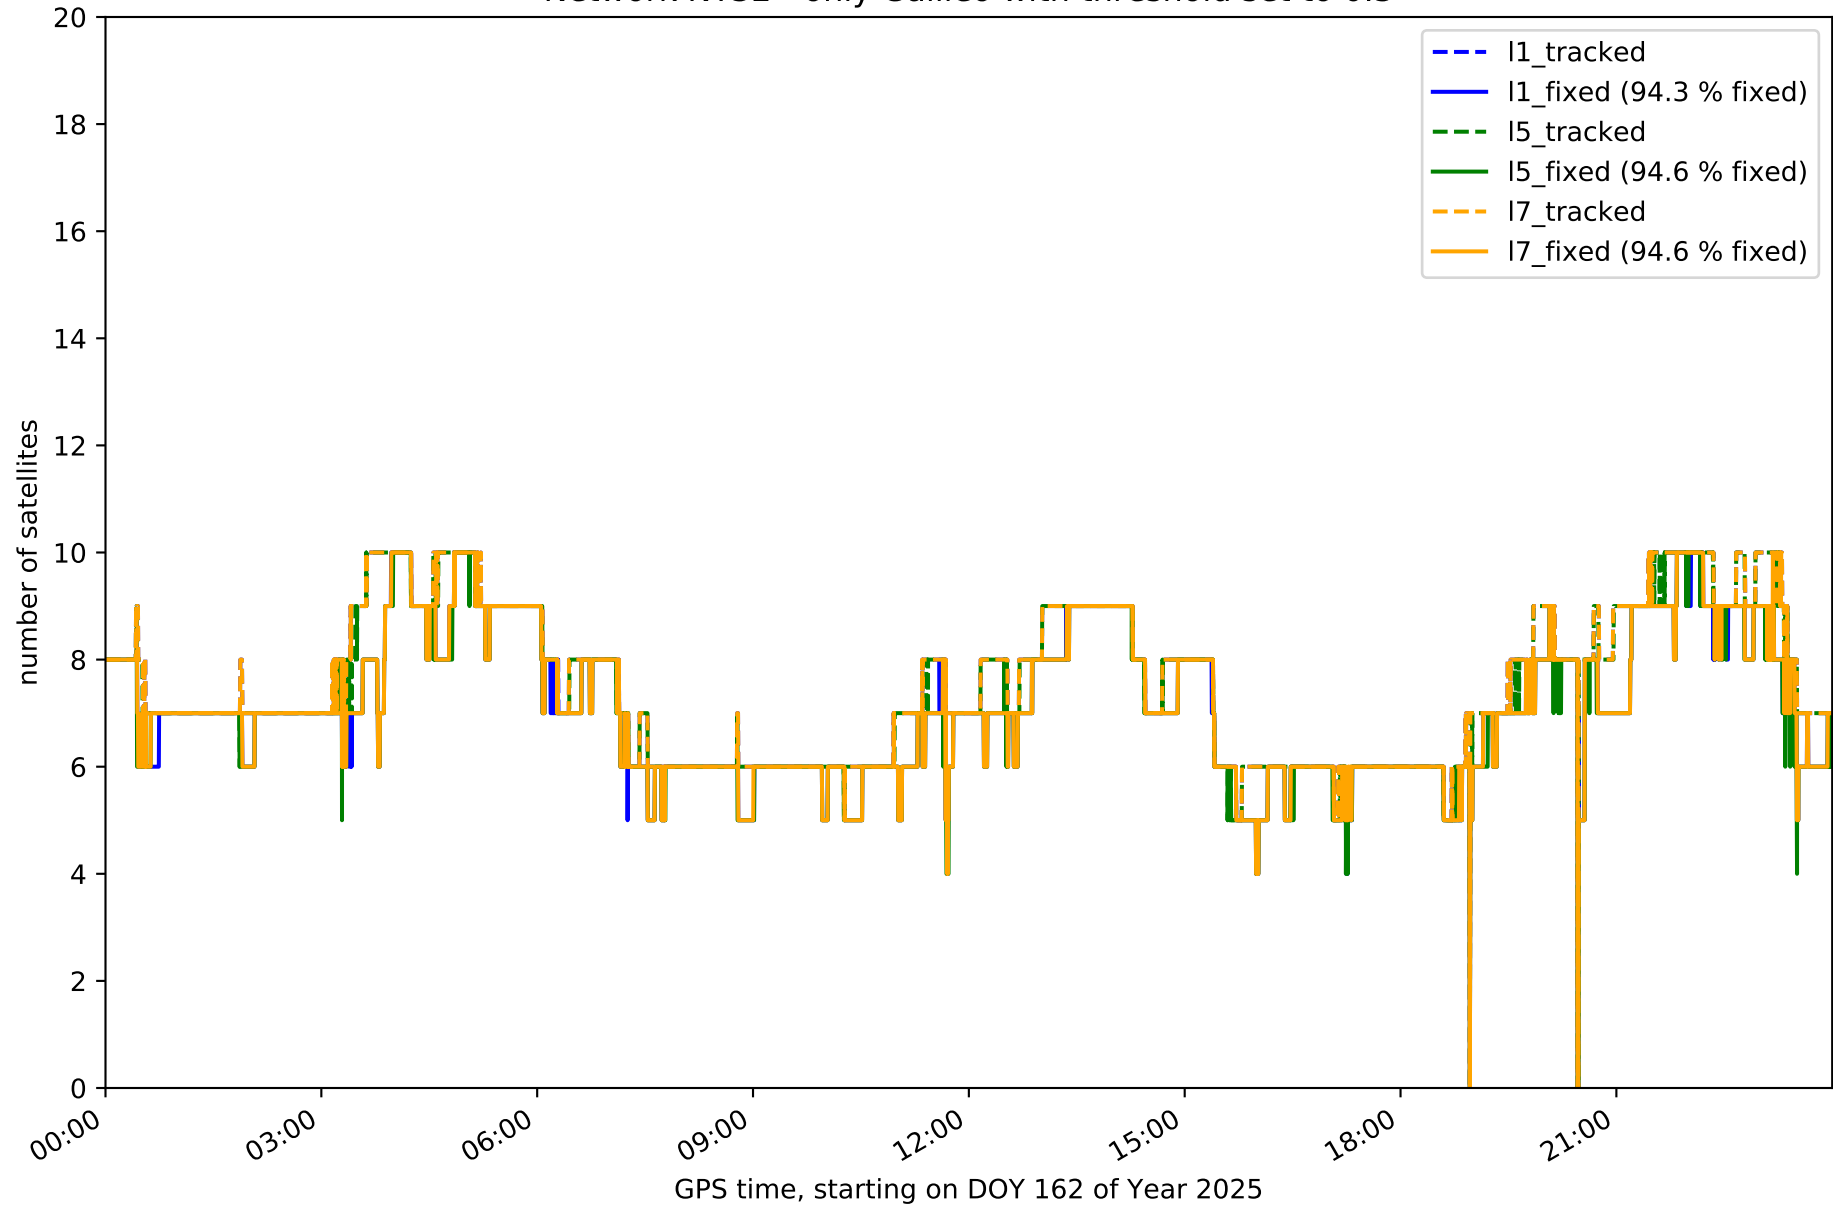


Station EH01 in network NT32

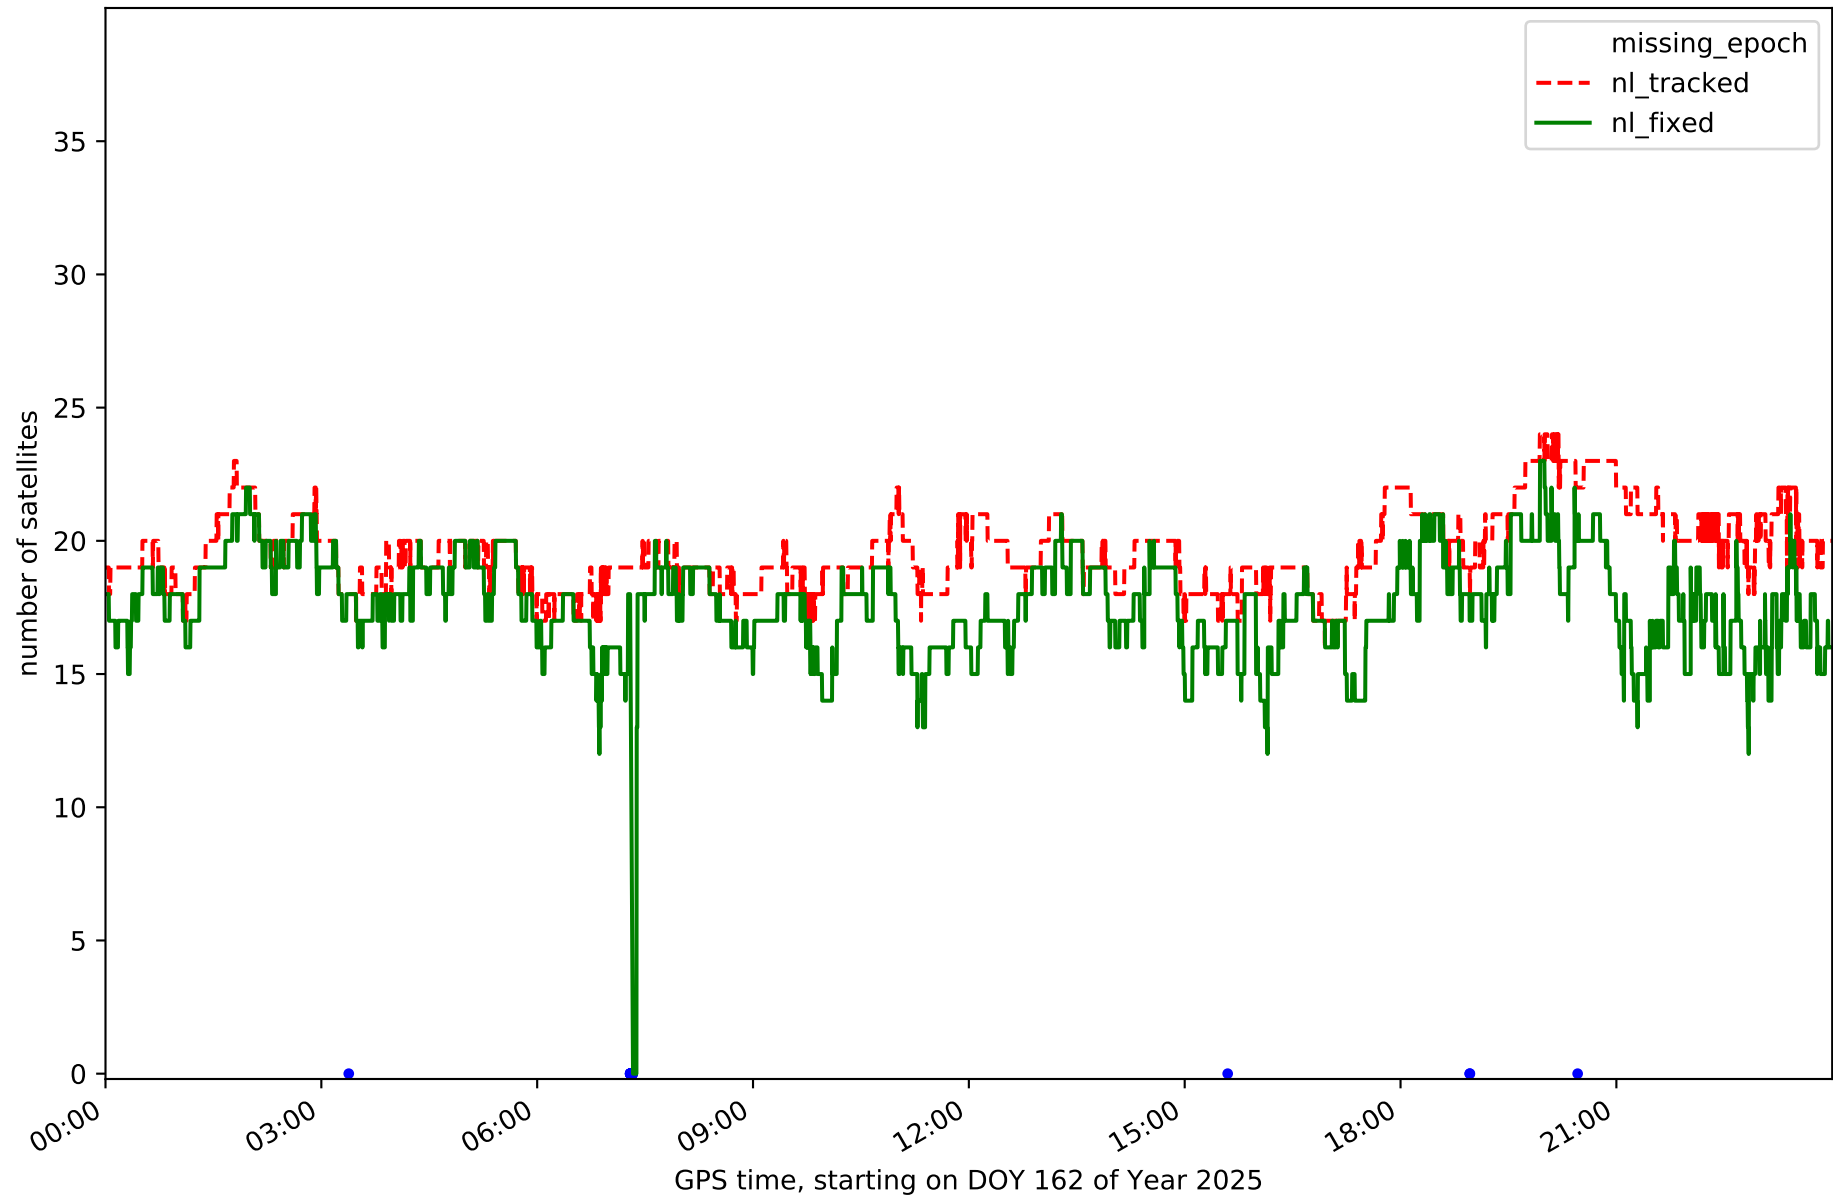


Station EH02 in network NT32

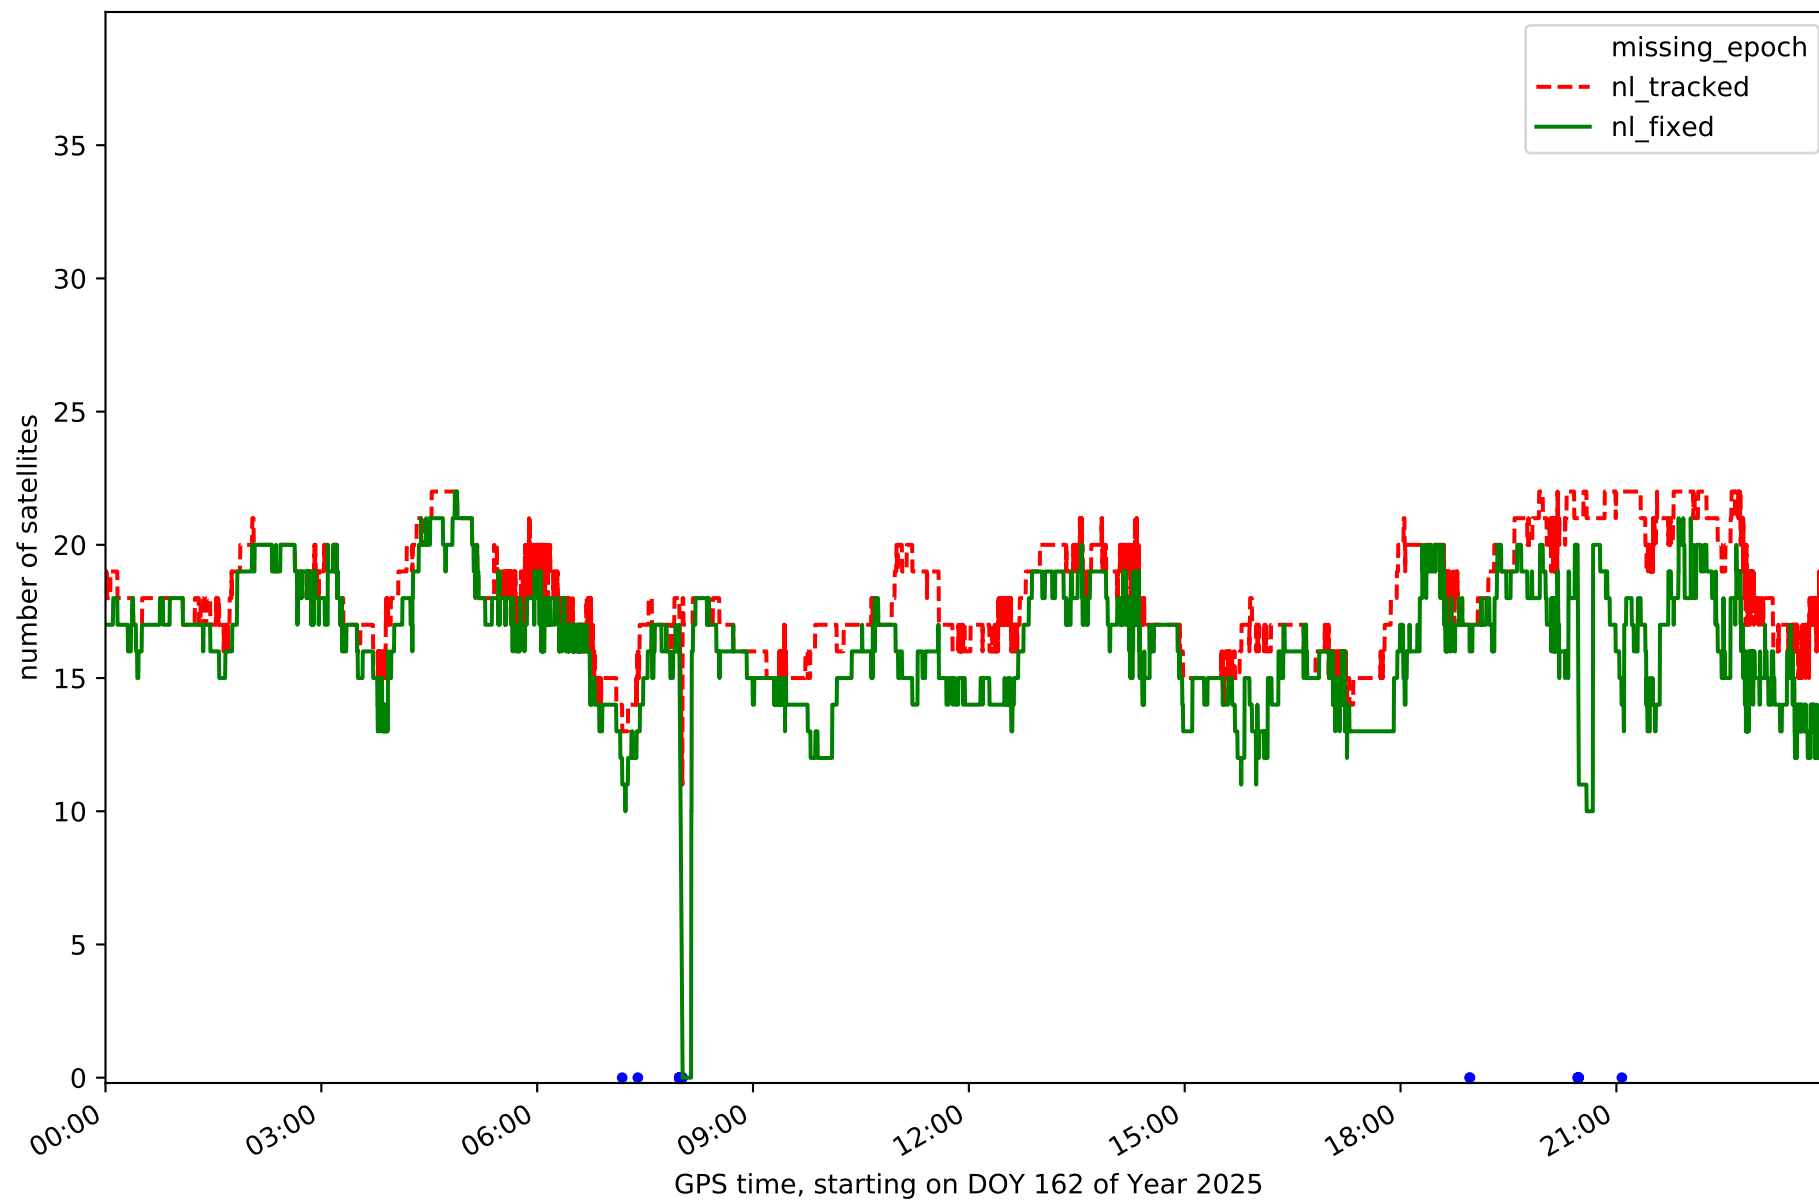


Station GOM1 in network NT32

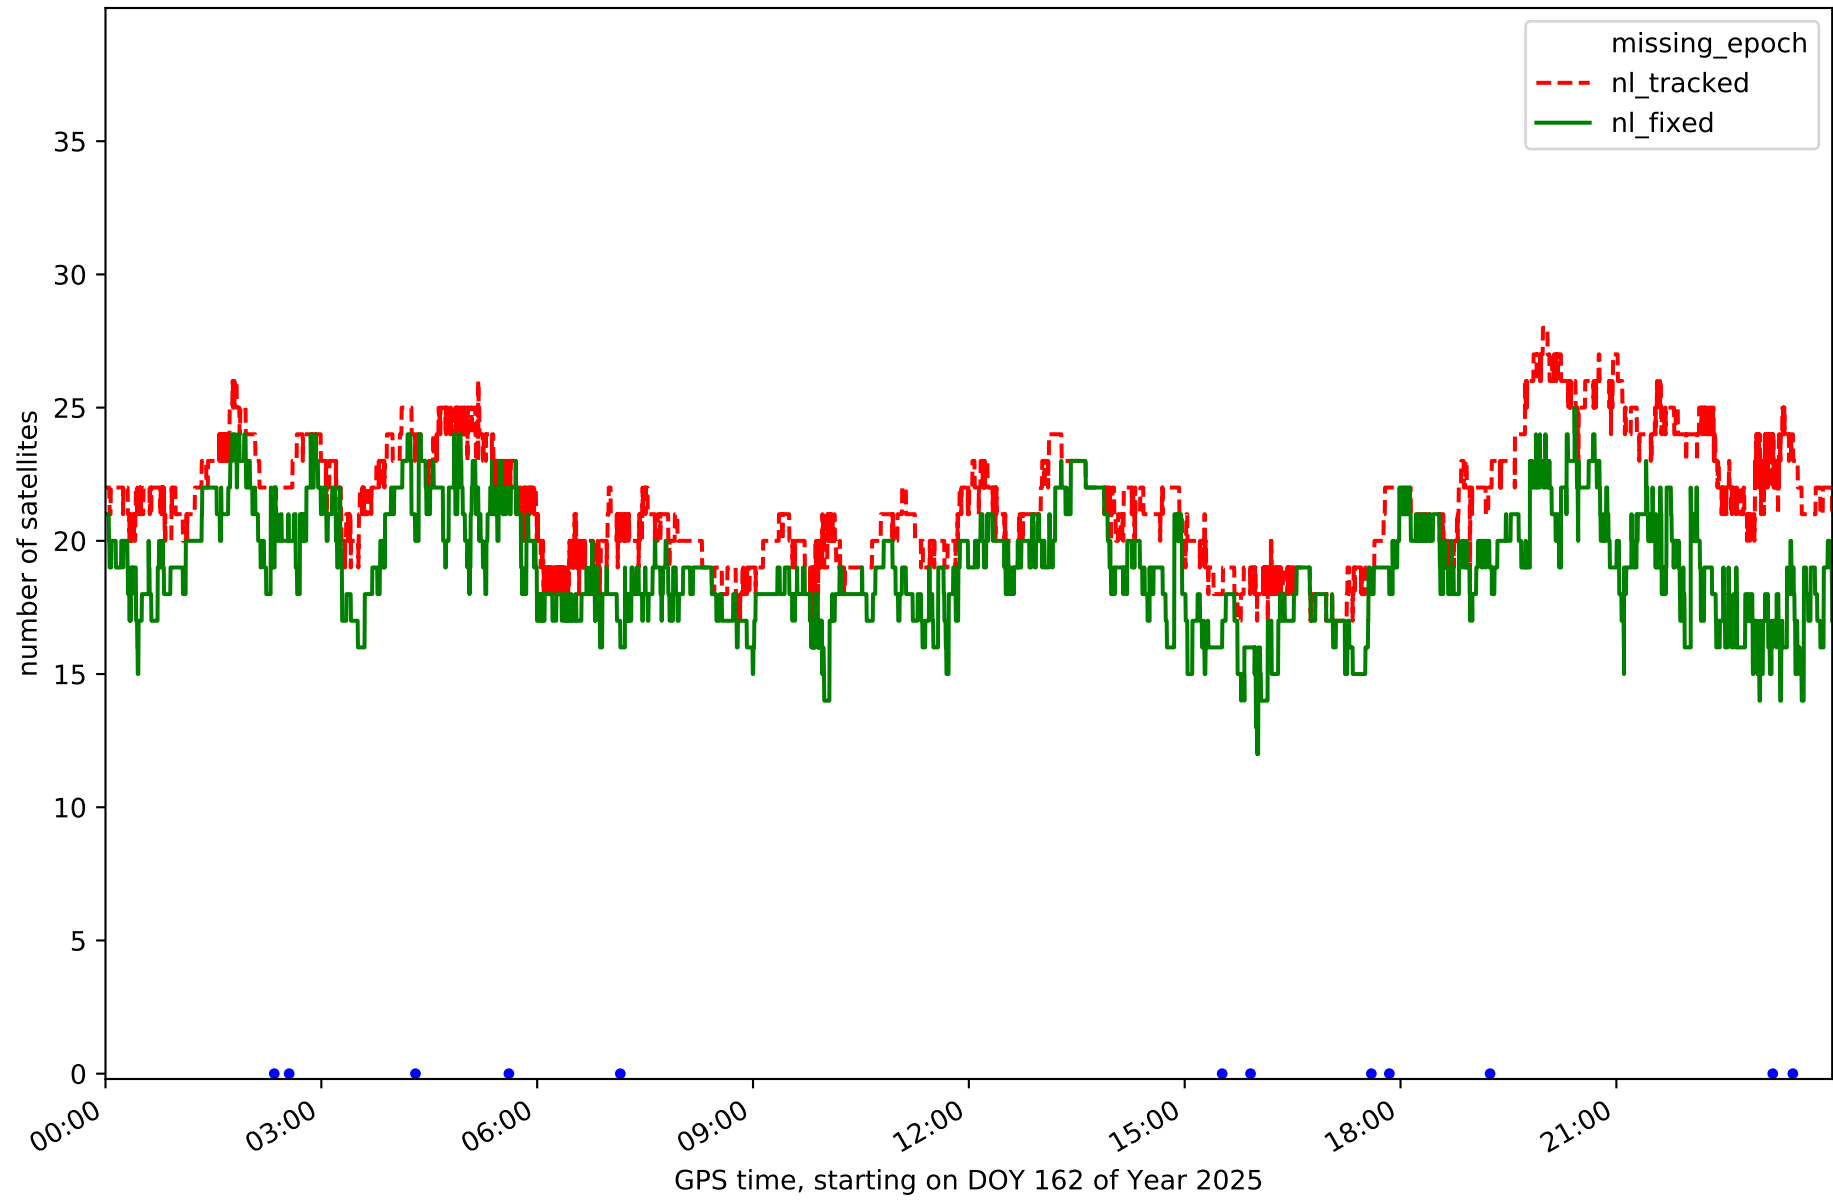


Station IZAN in network NT32

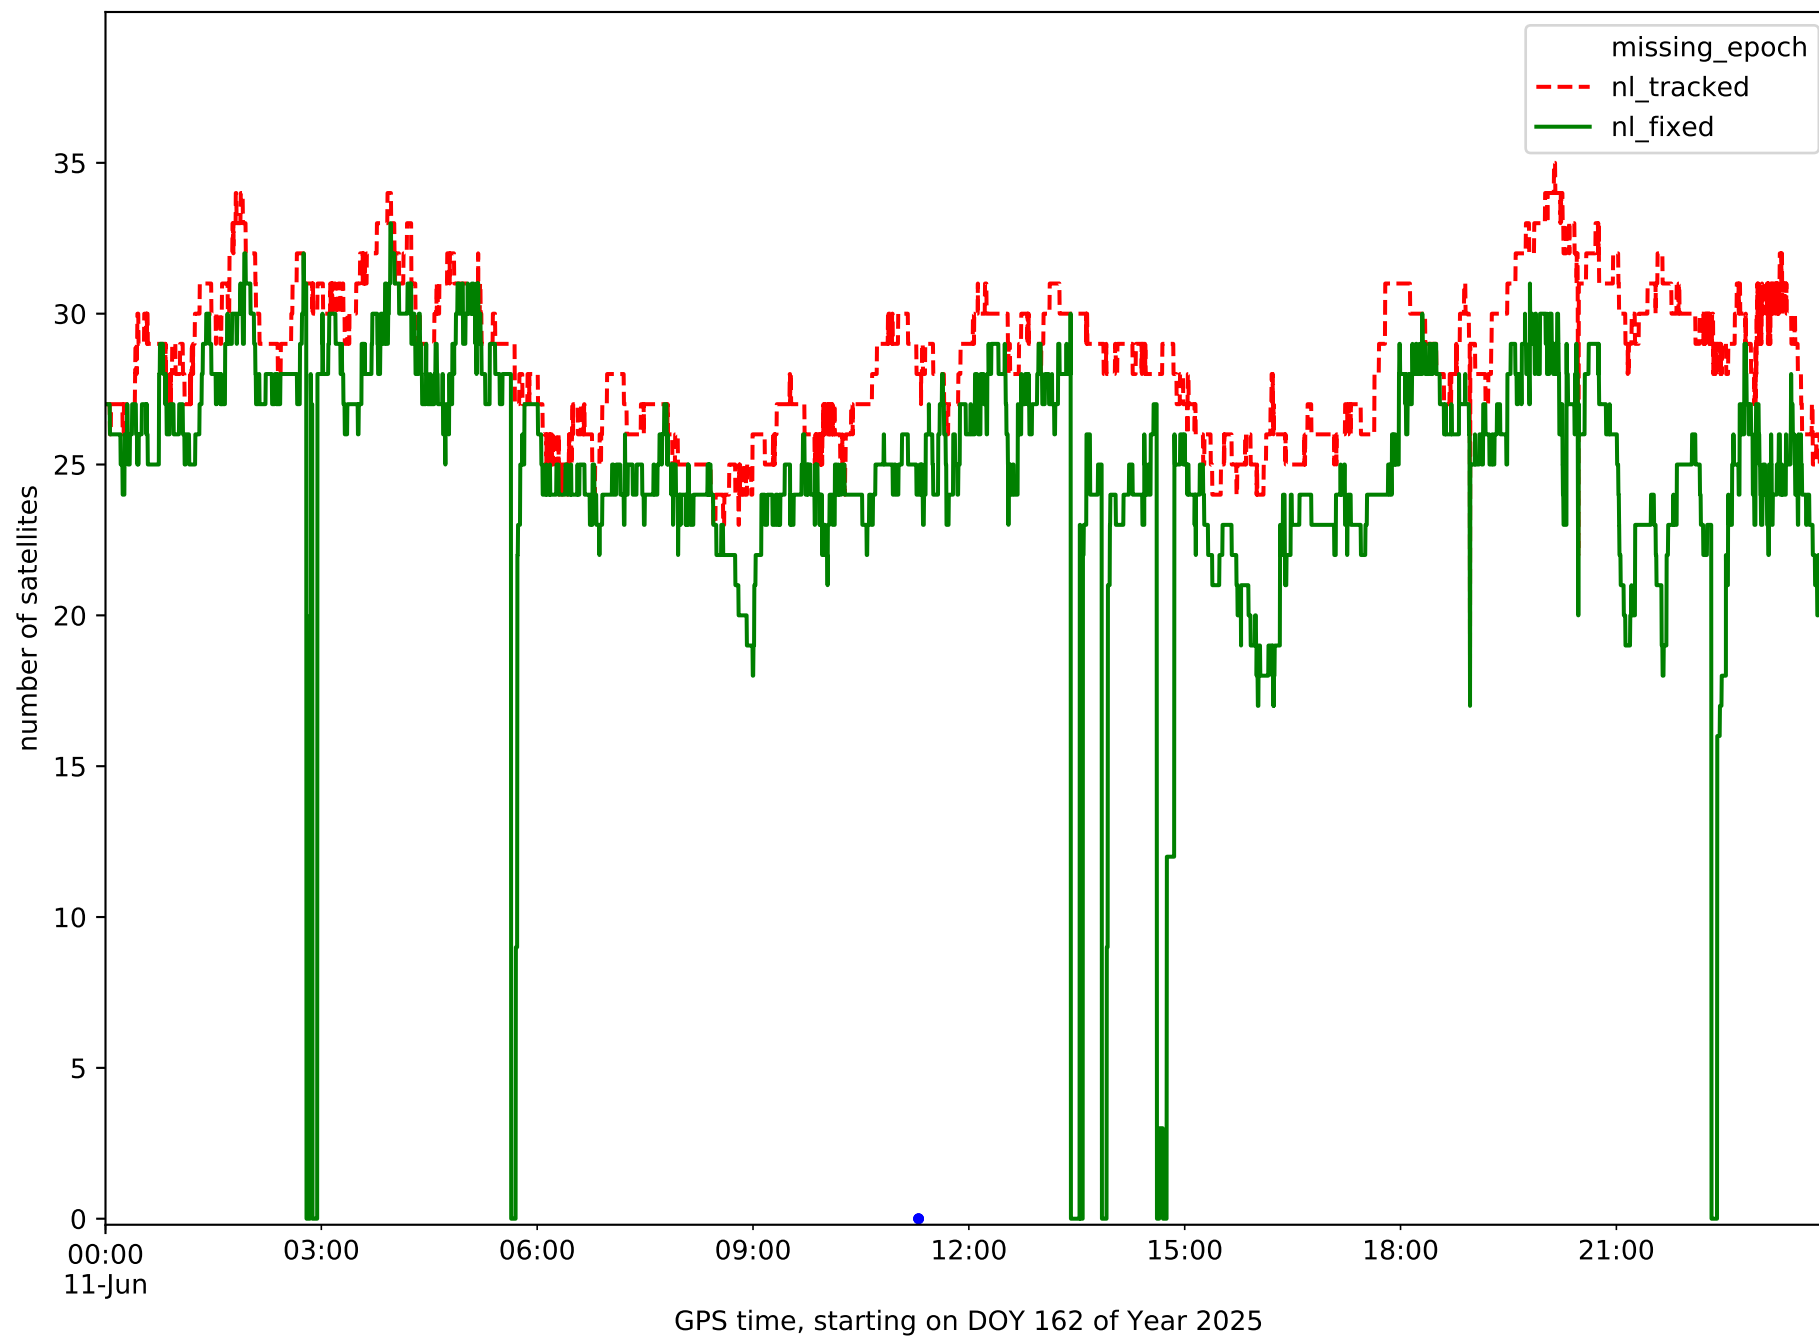


Station LP01 in network NT32

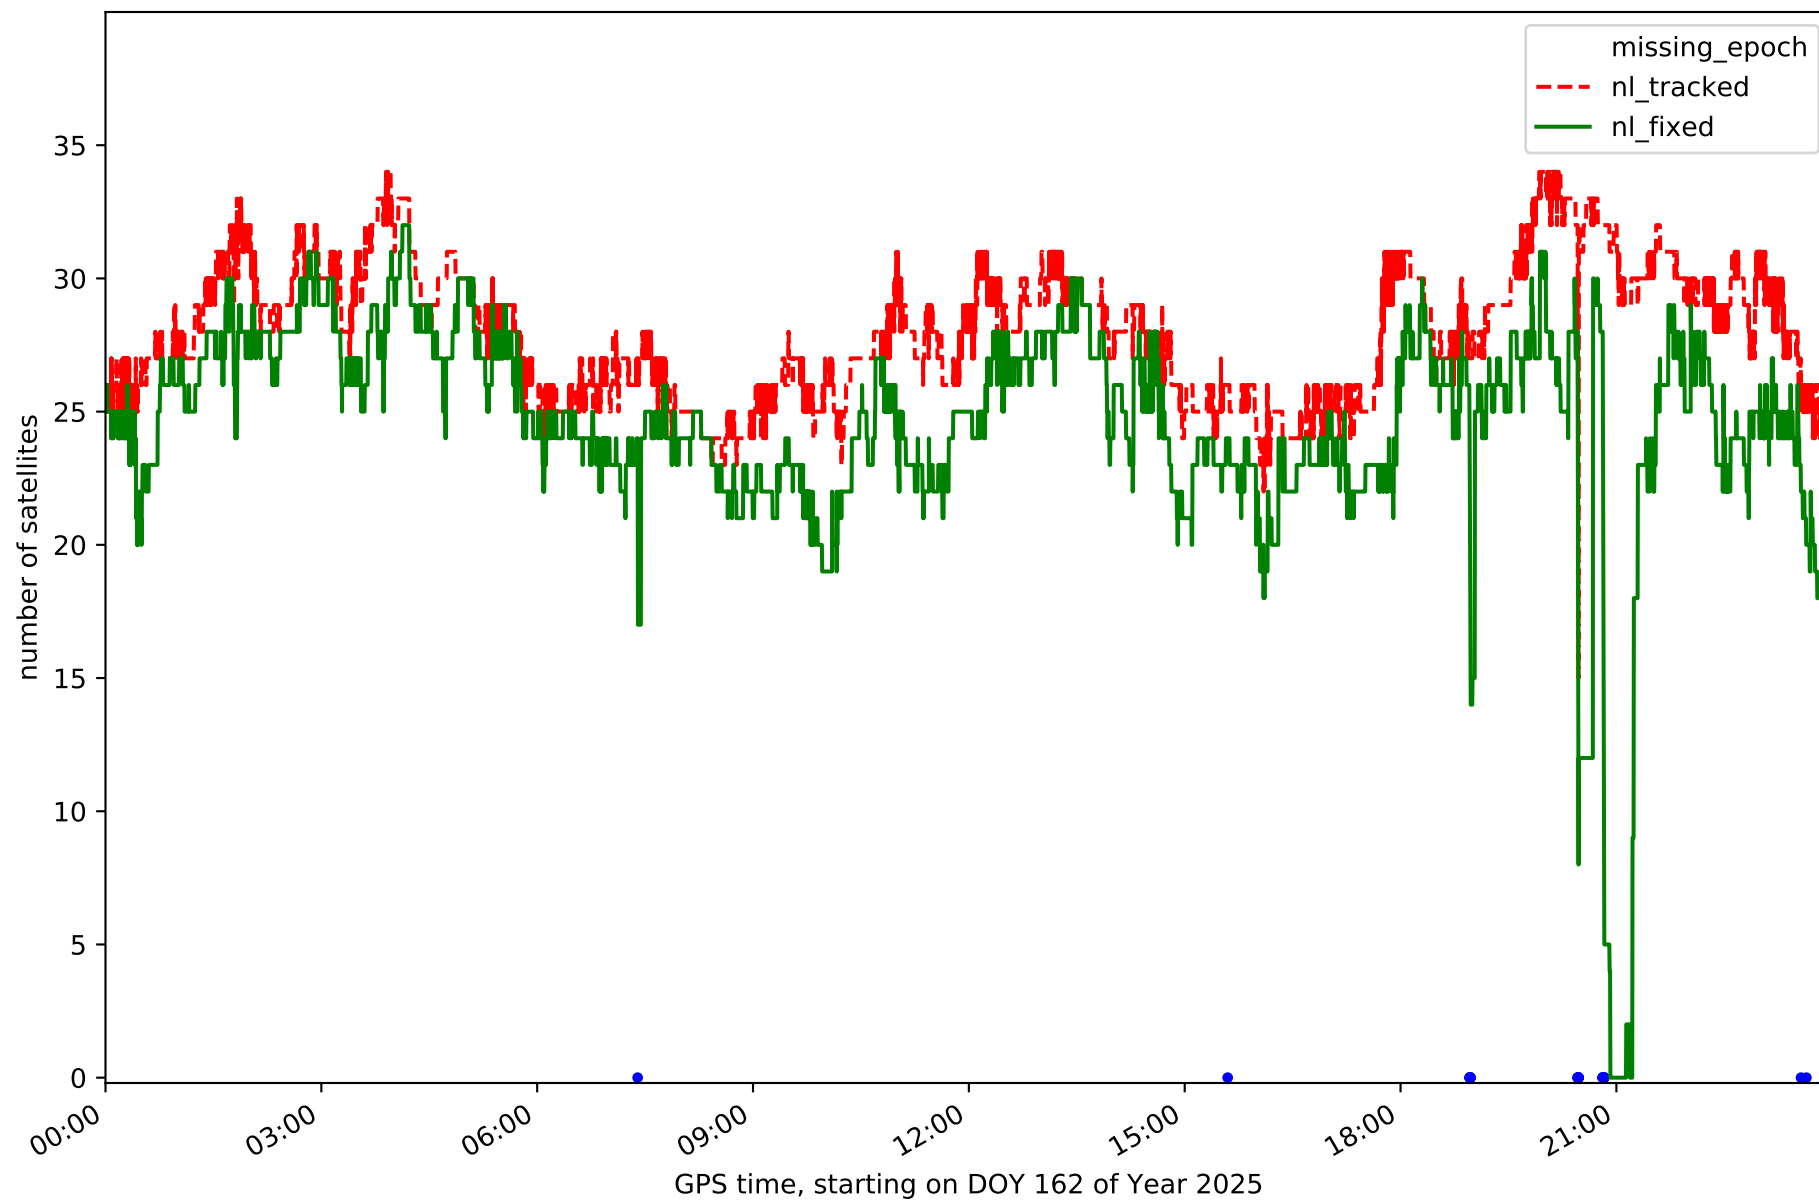


Station LP03 in network NT32

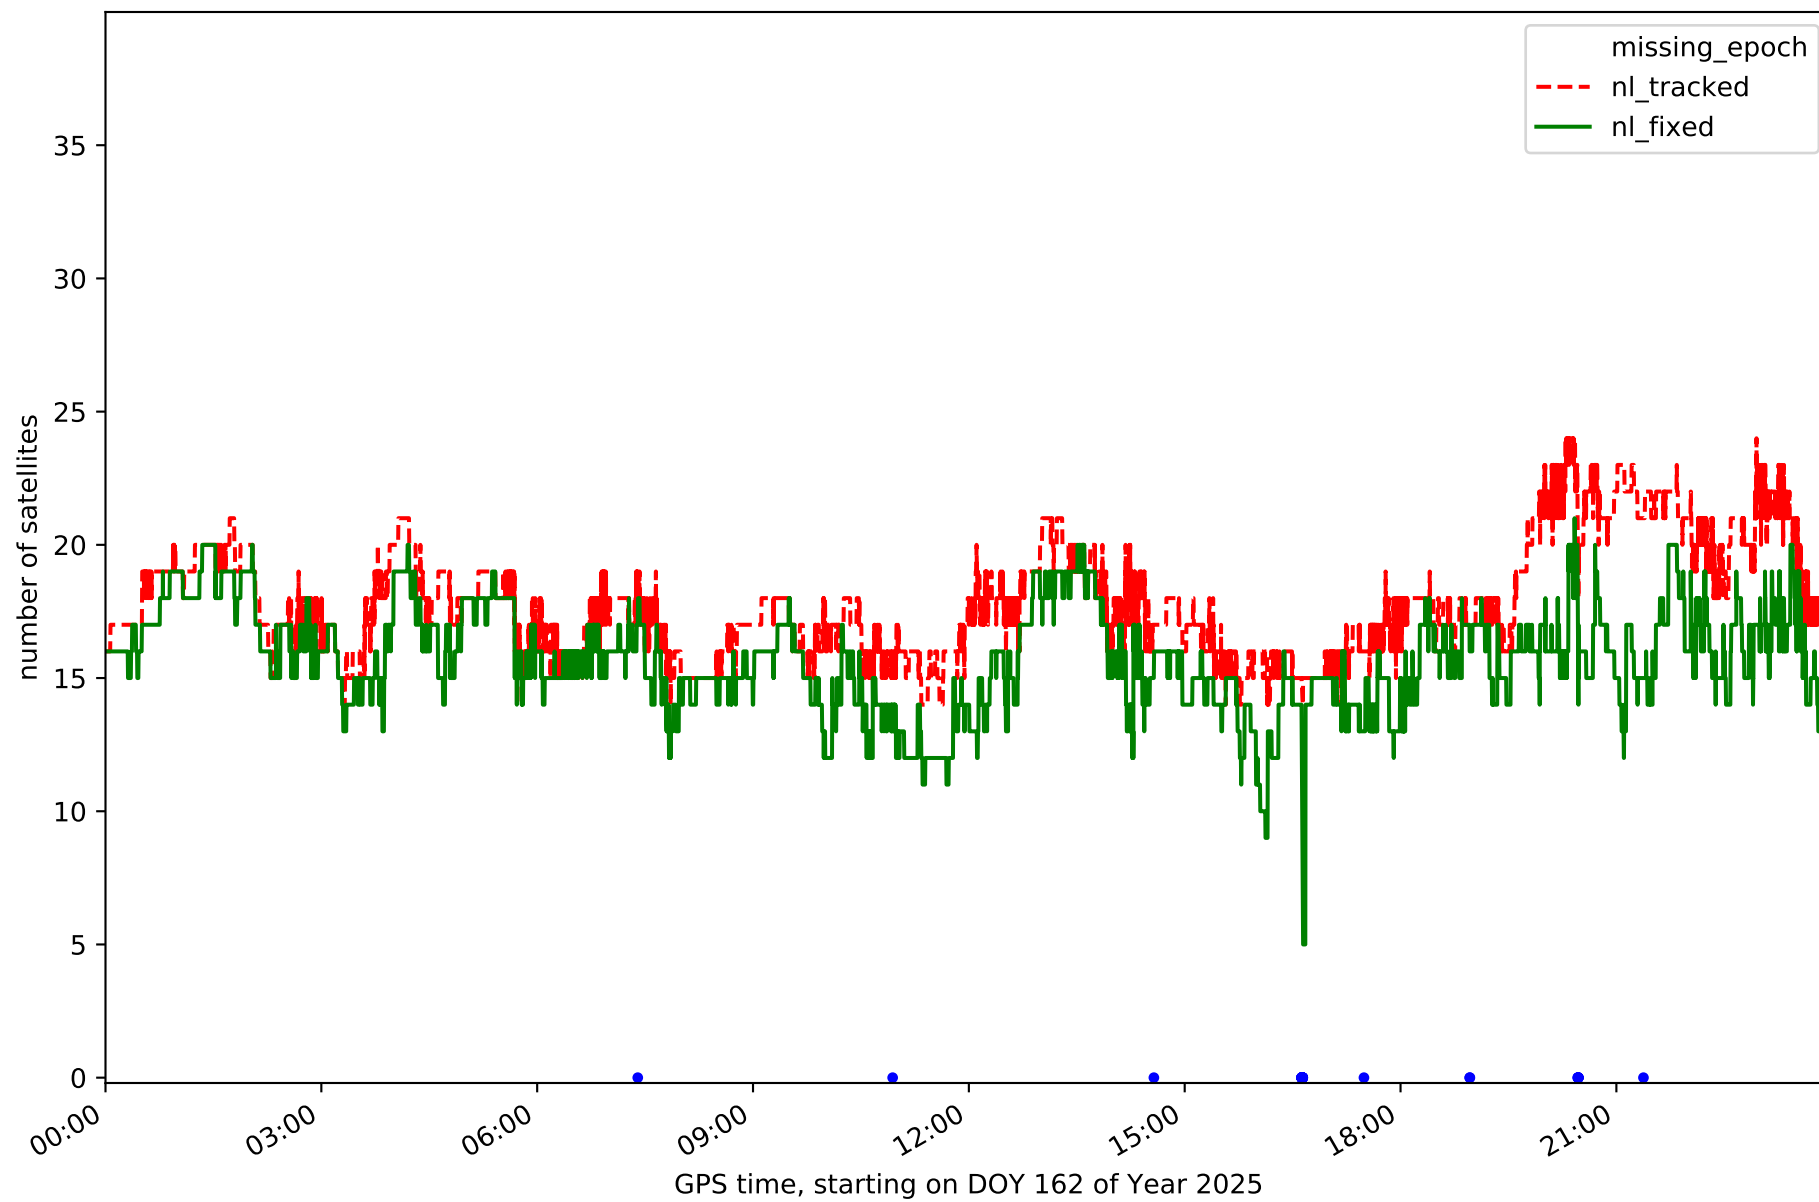


Station LPAL in network NT32

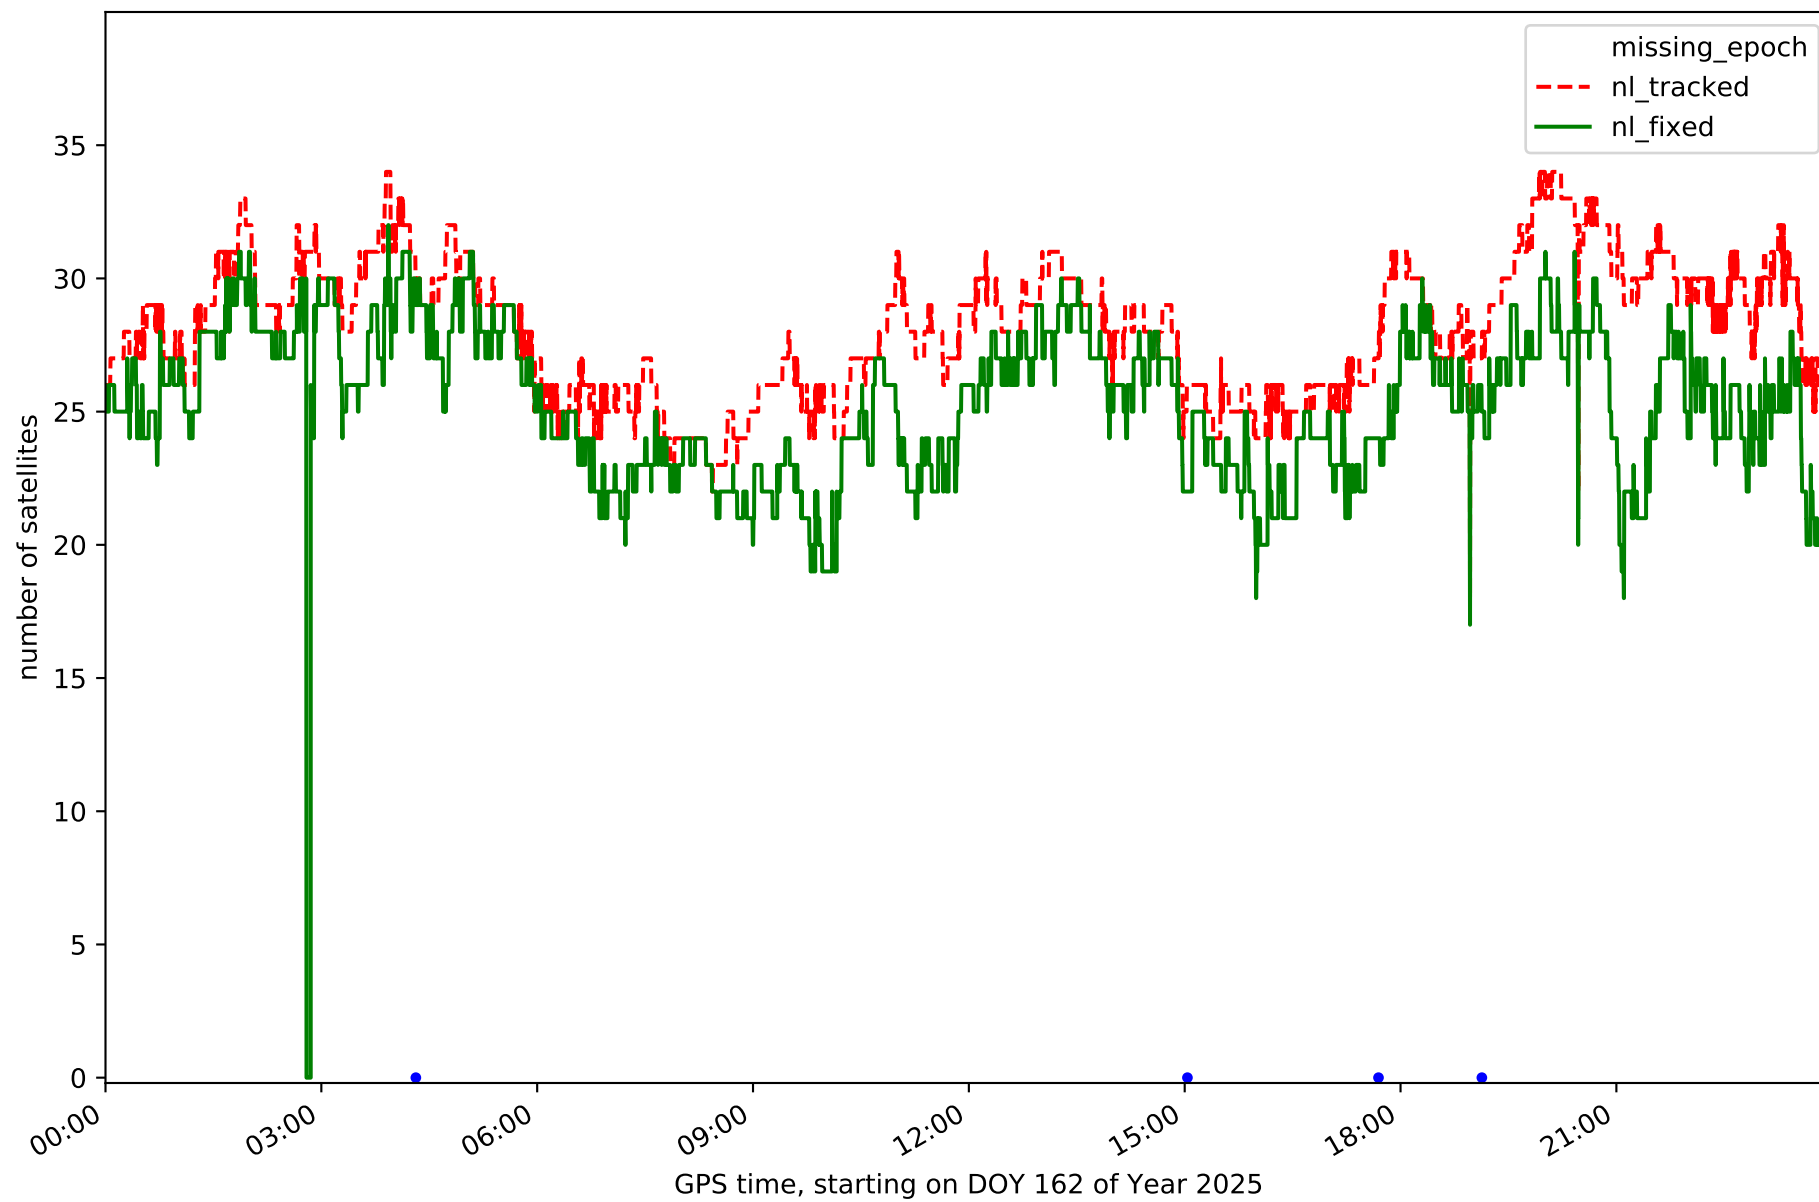


Station LRES in network NT32

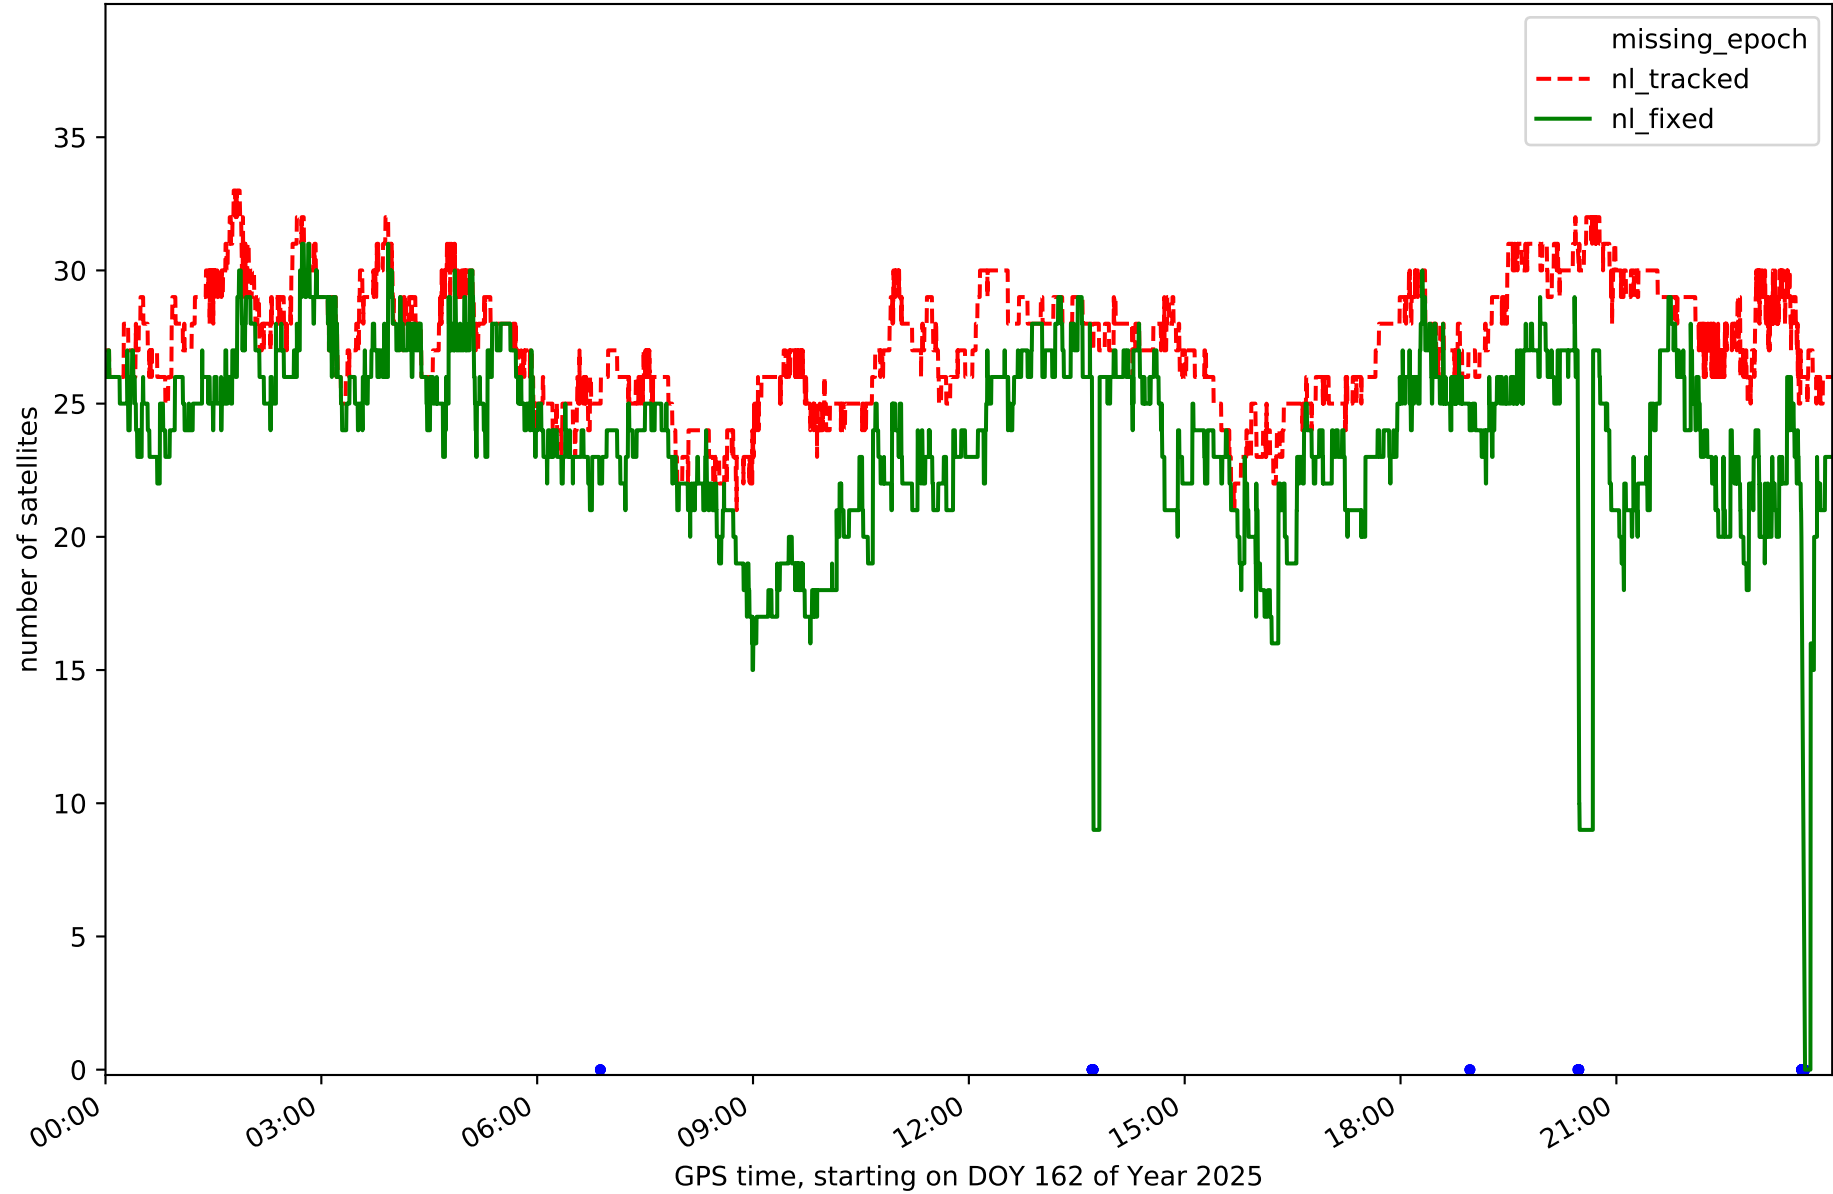


Station TN01 in network NT32

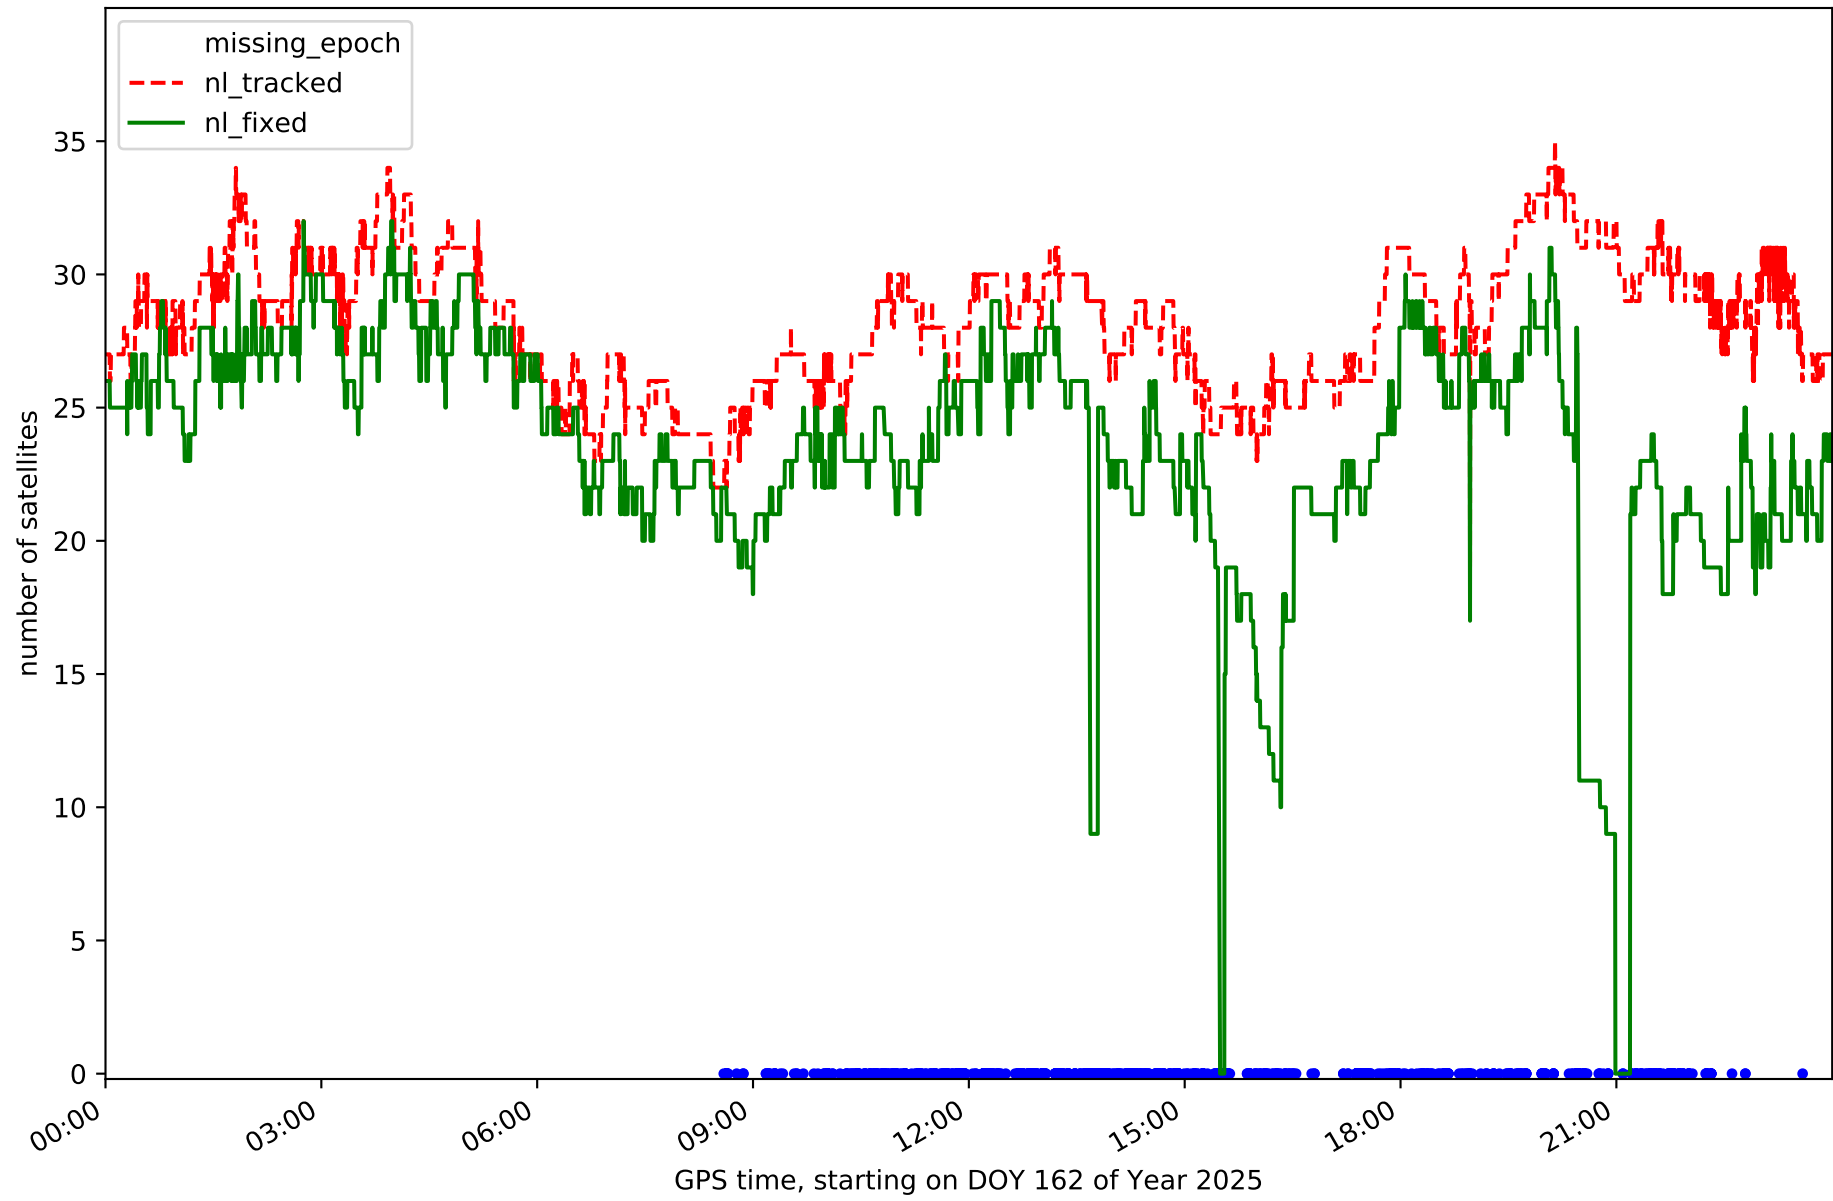


Station TN02 in network NT32

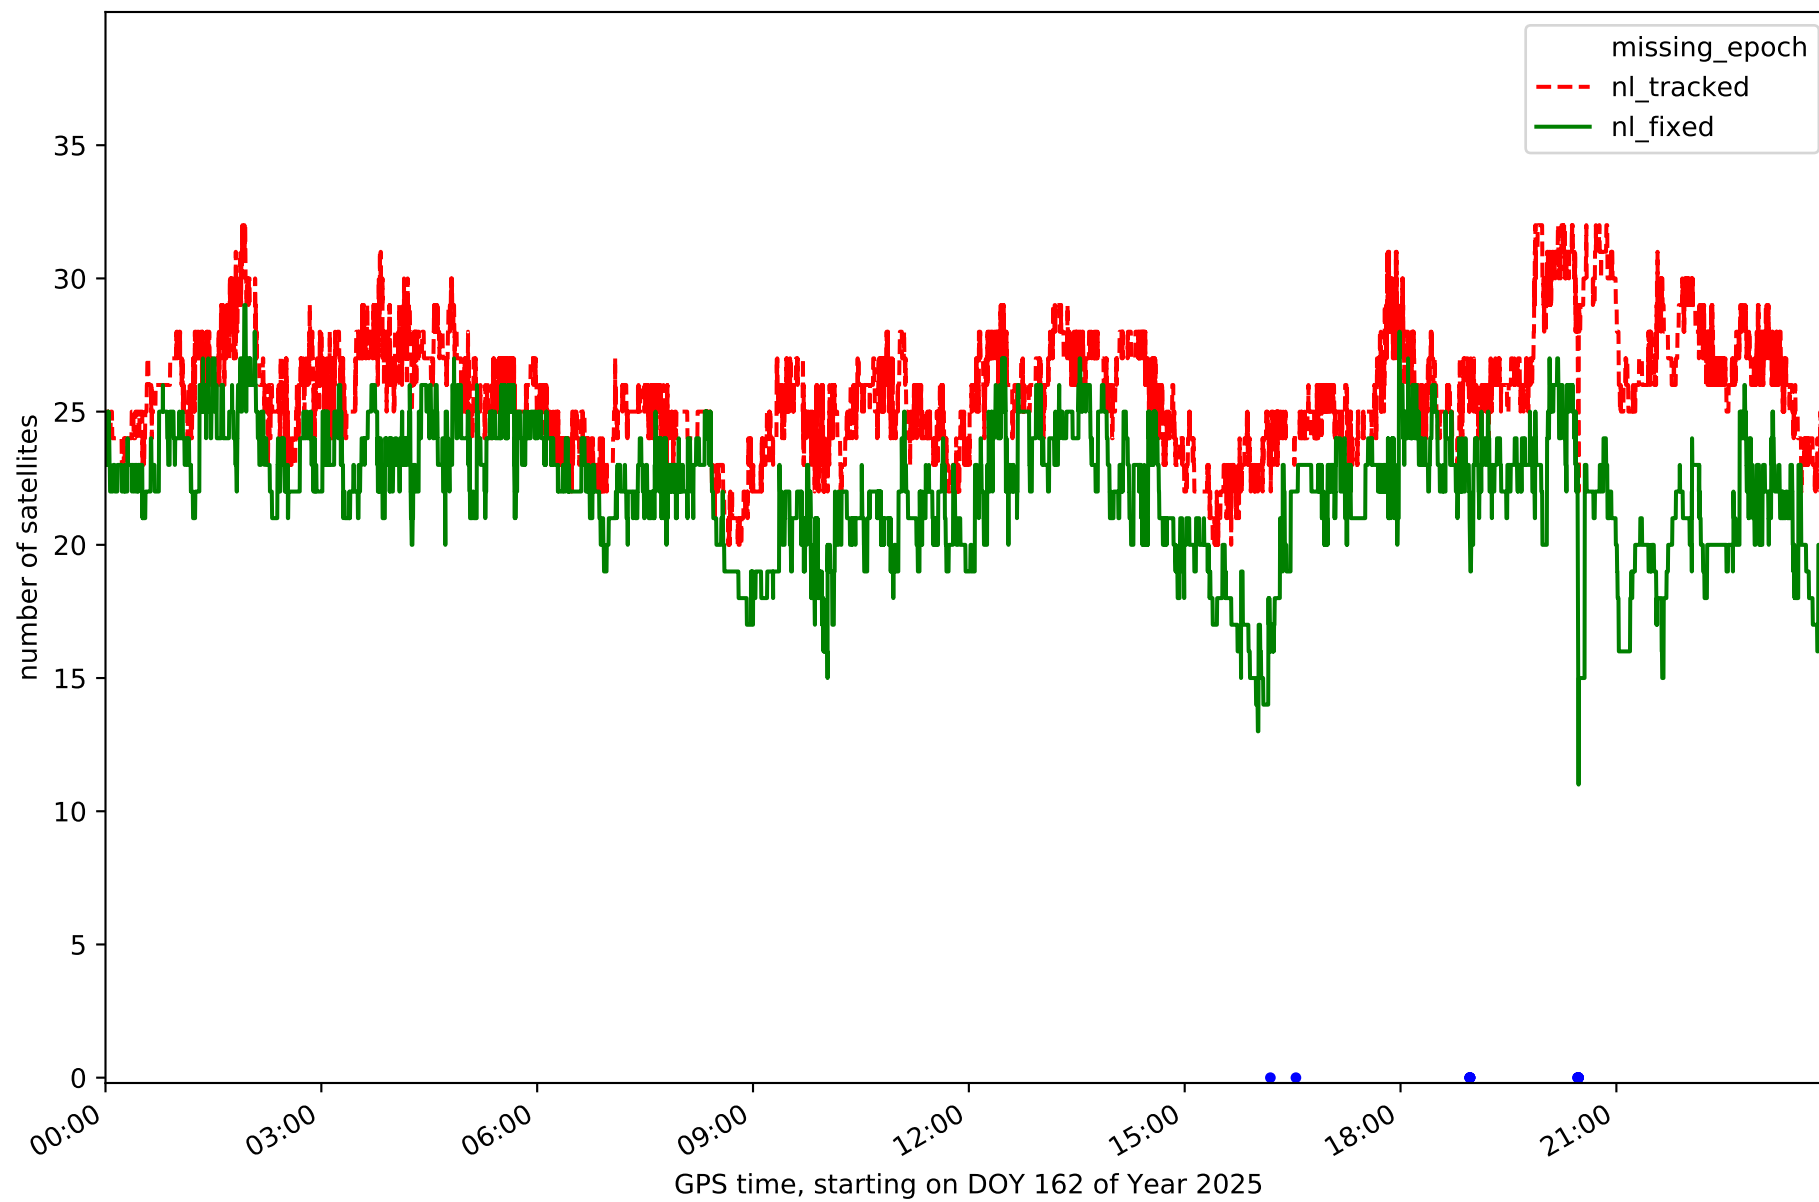


Station TN03 in network NT32

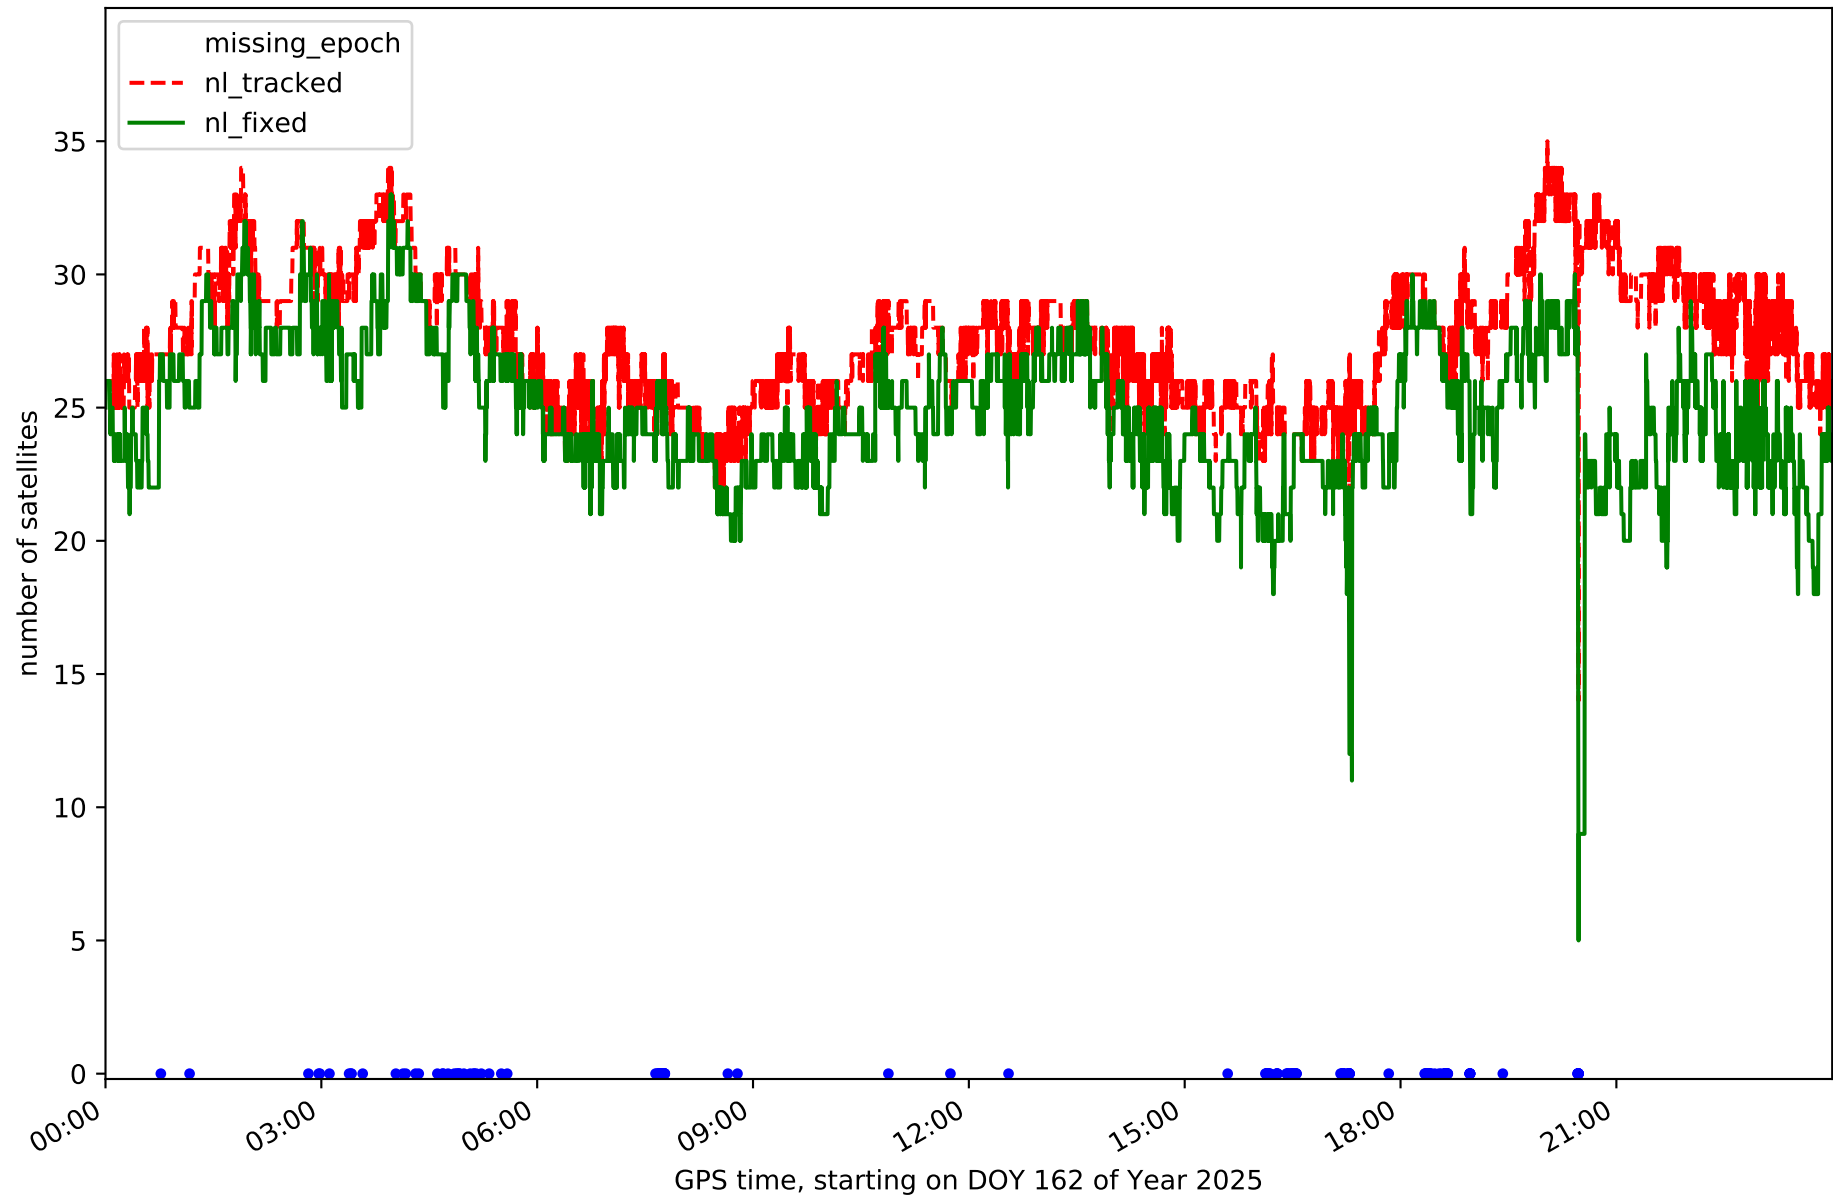


Station TN04 in network NT32

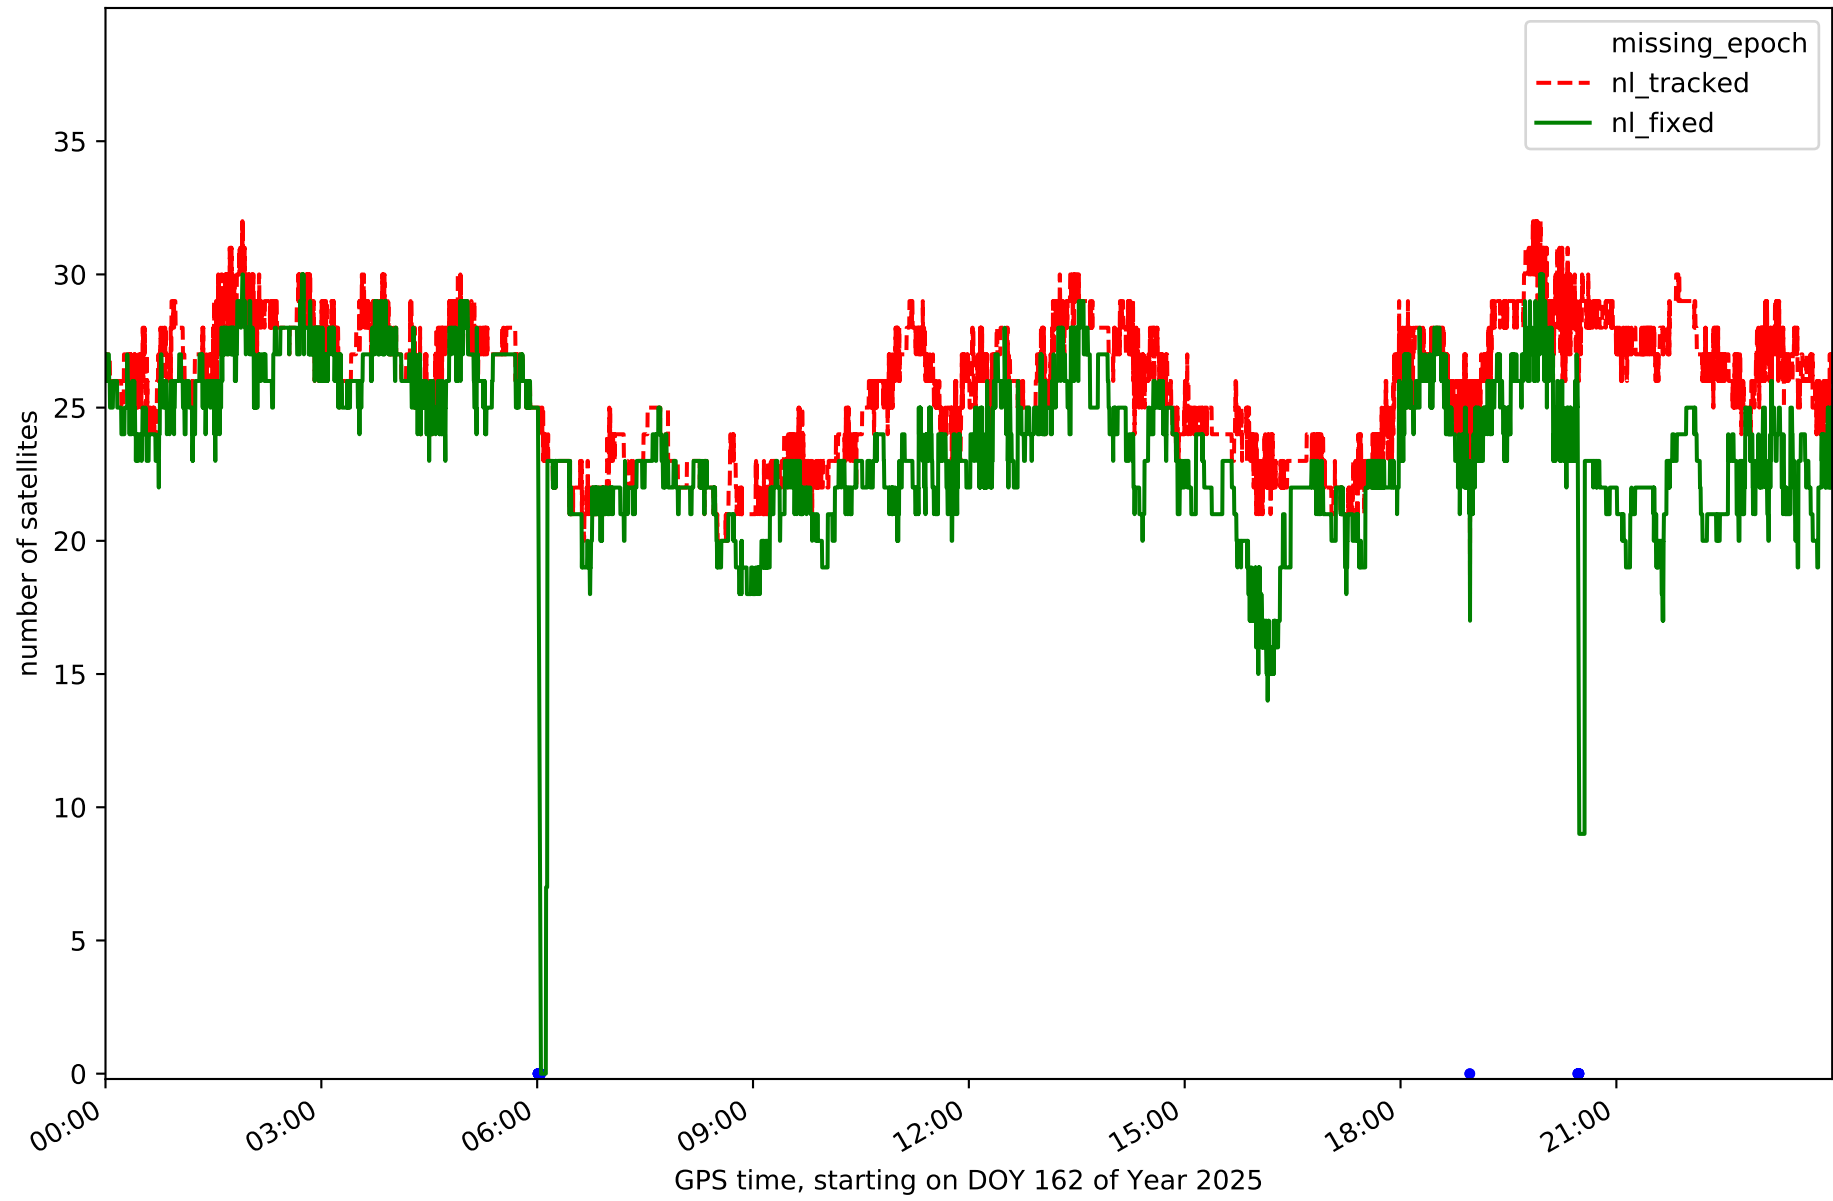


Station TN06 in network NT32

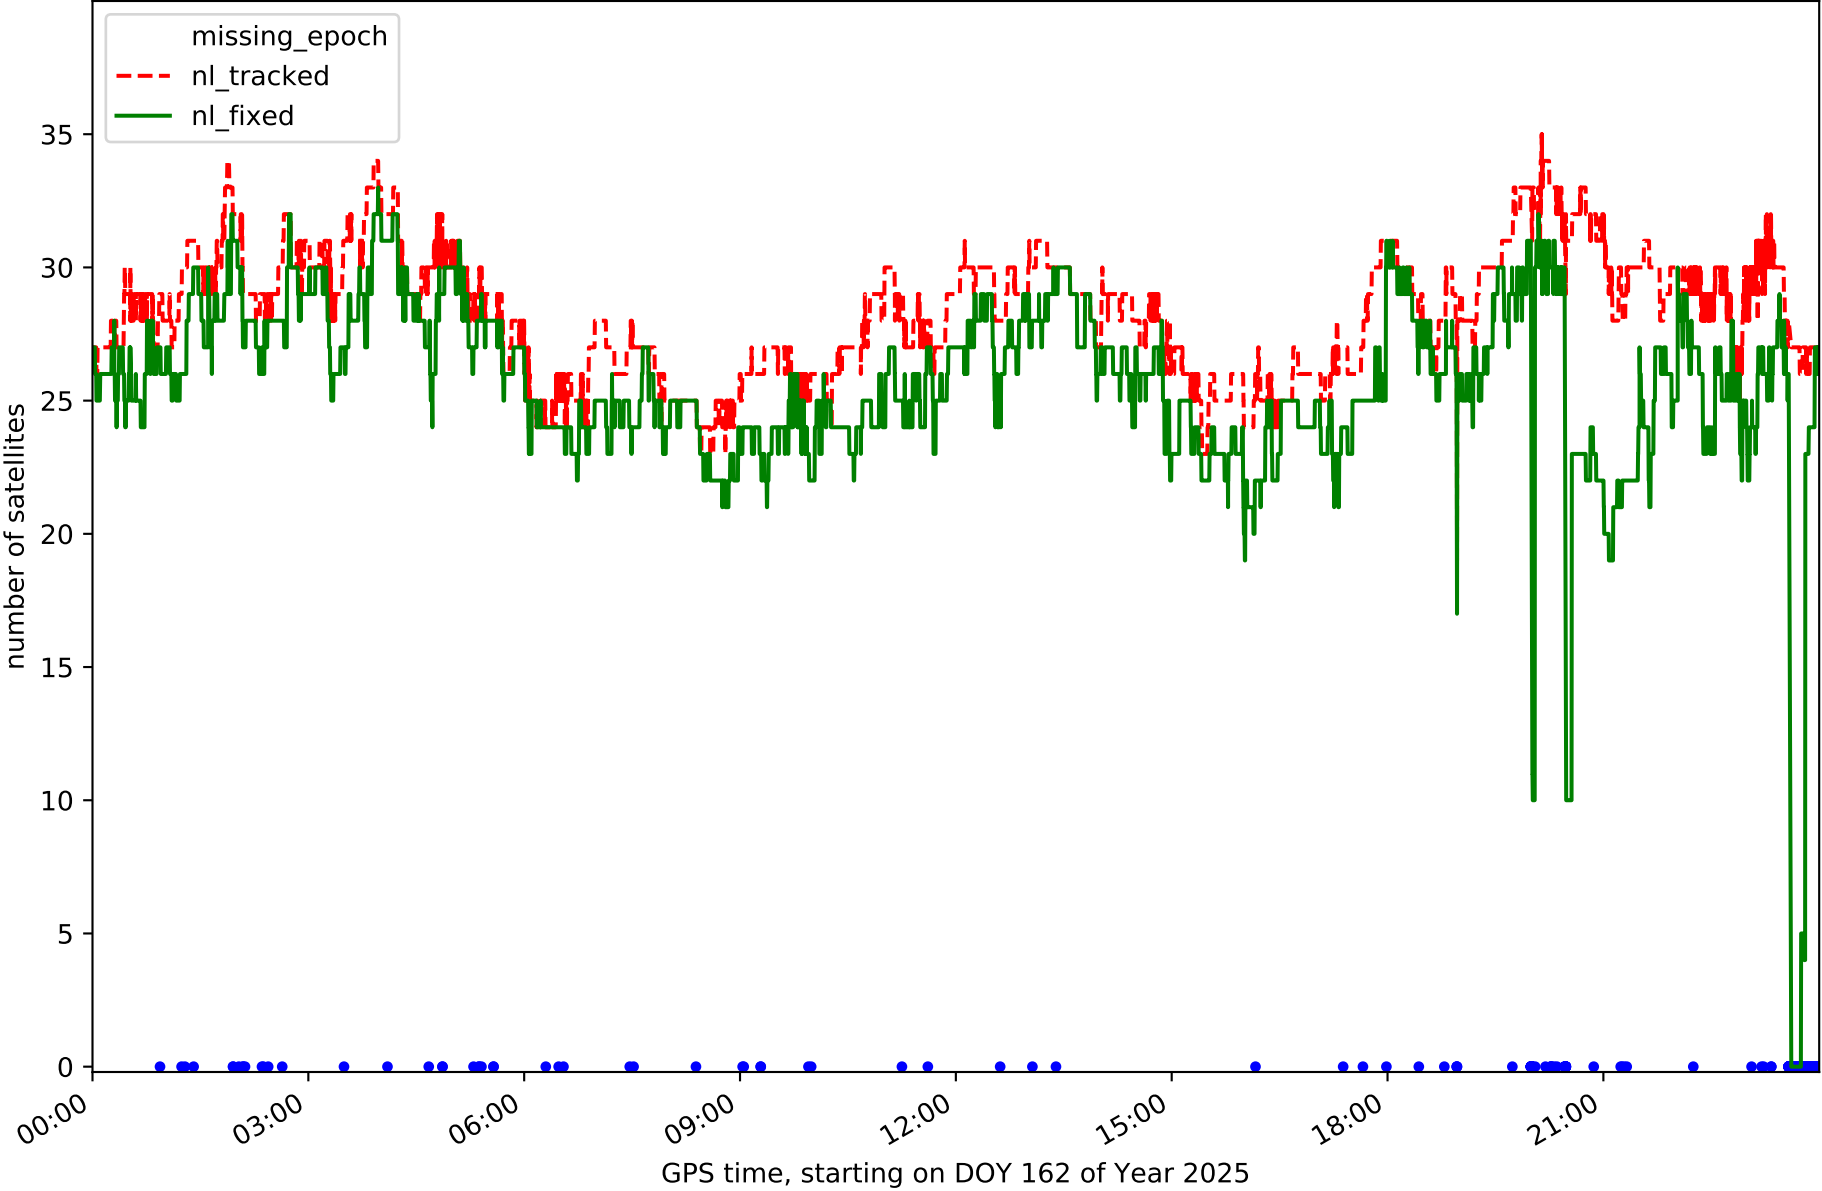


Station TN09 in network NT32

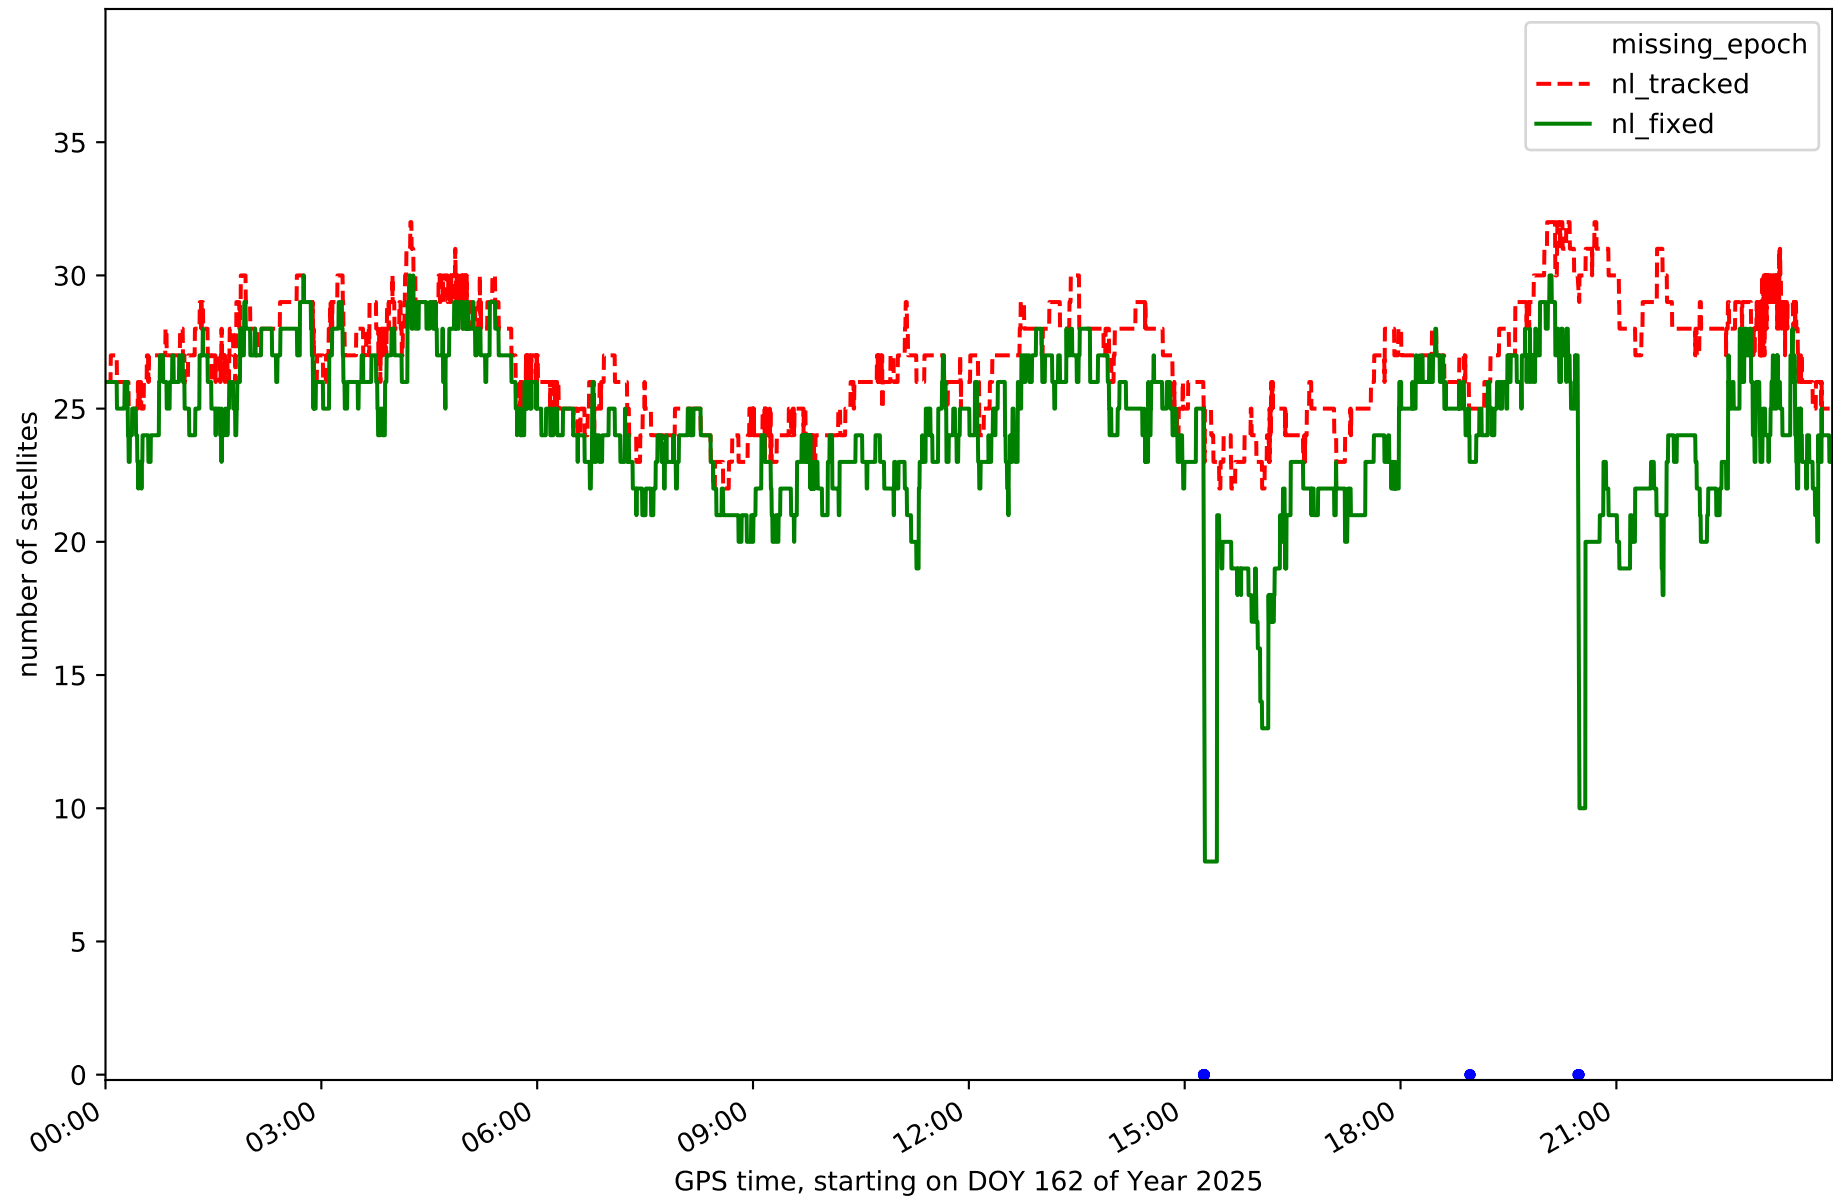


Station TE11 in network NT32

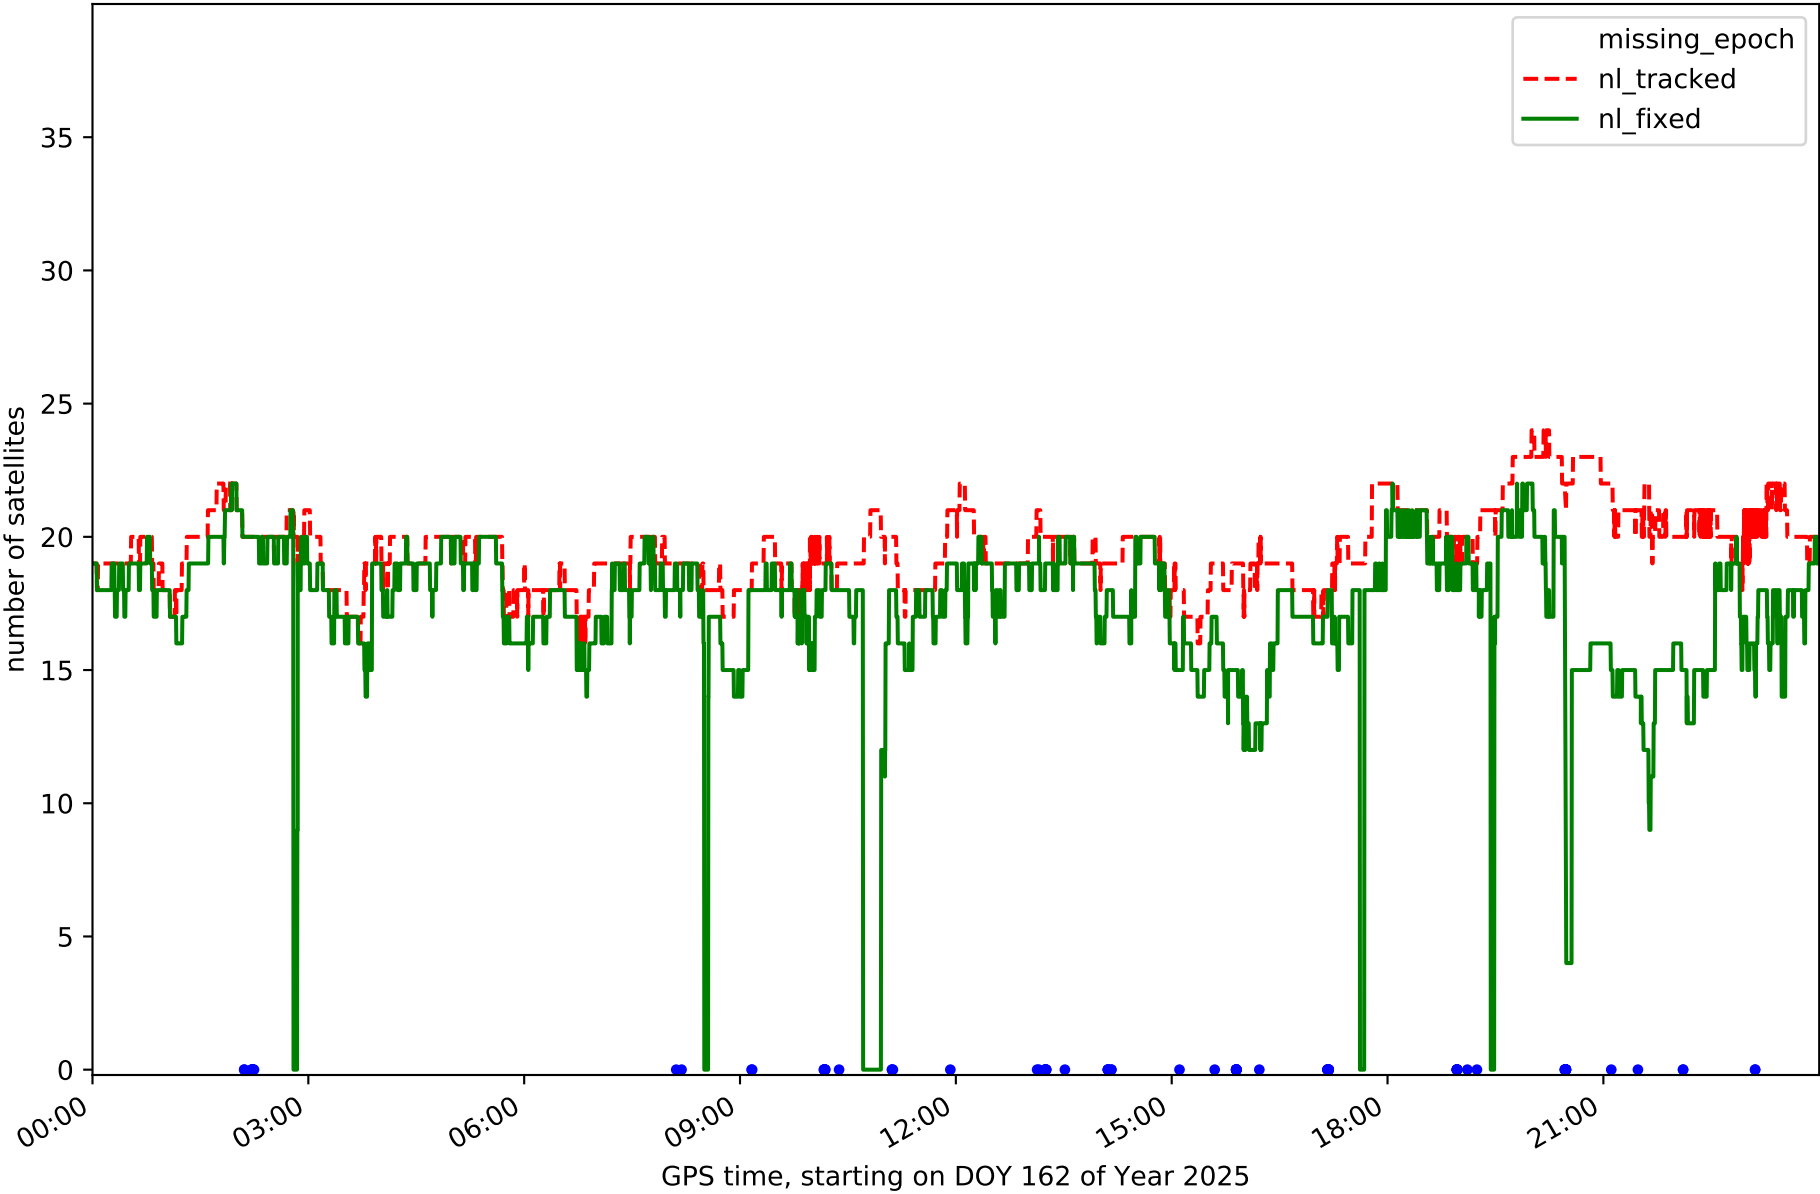


RefCheck for station EH01 in network NT32

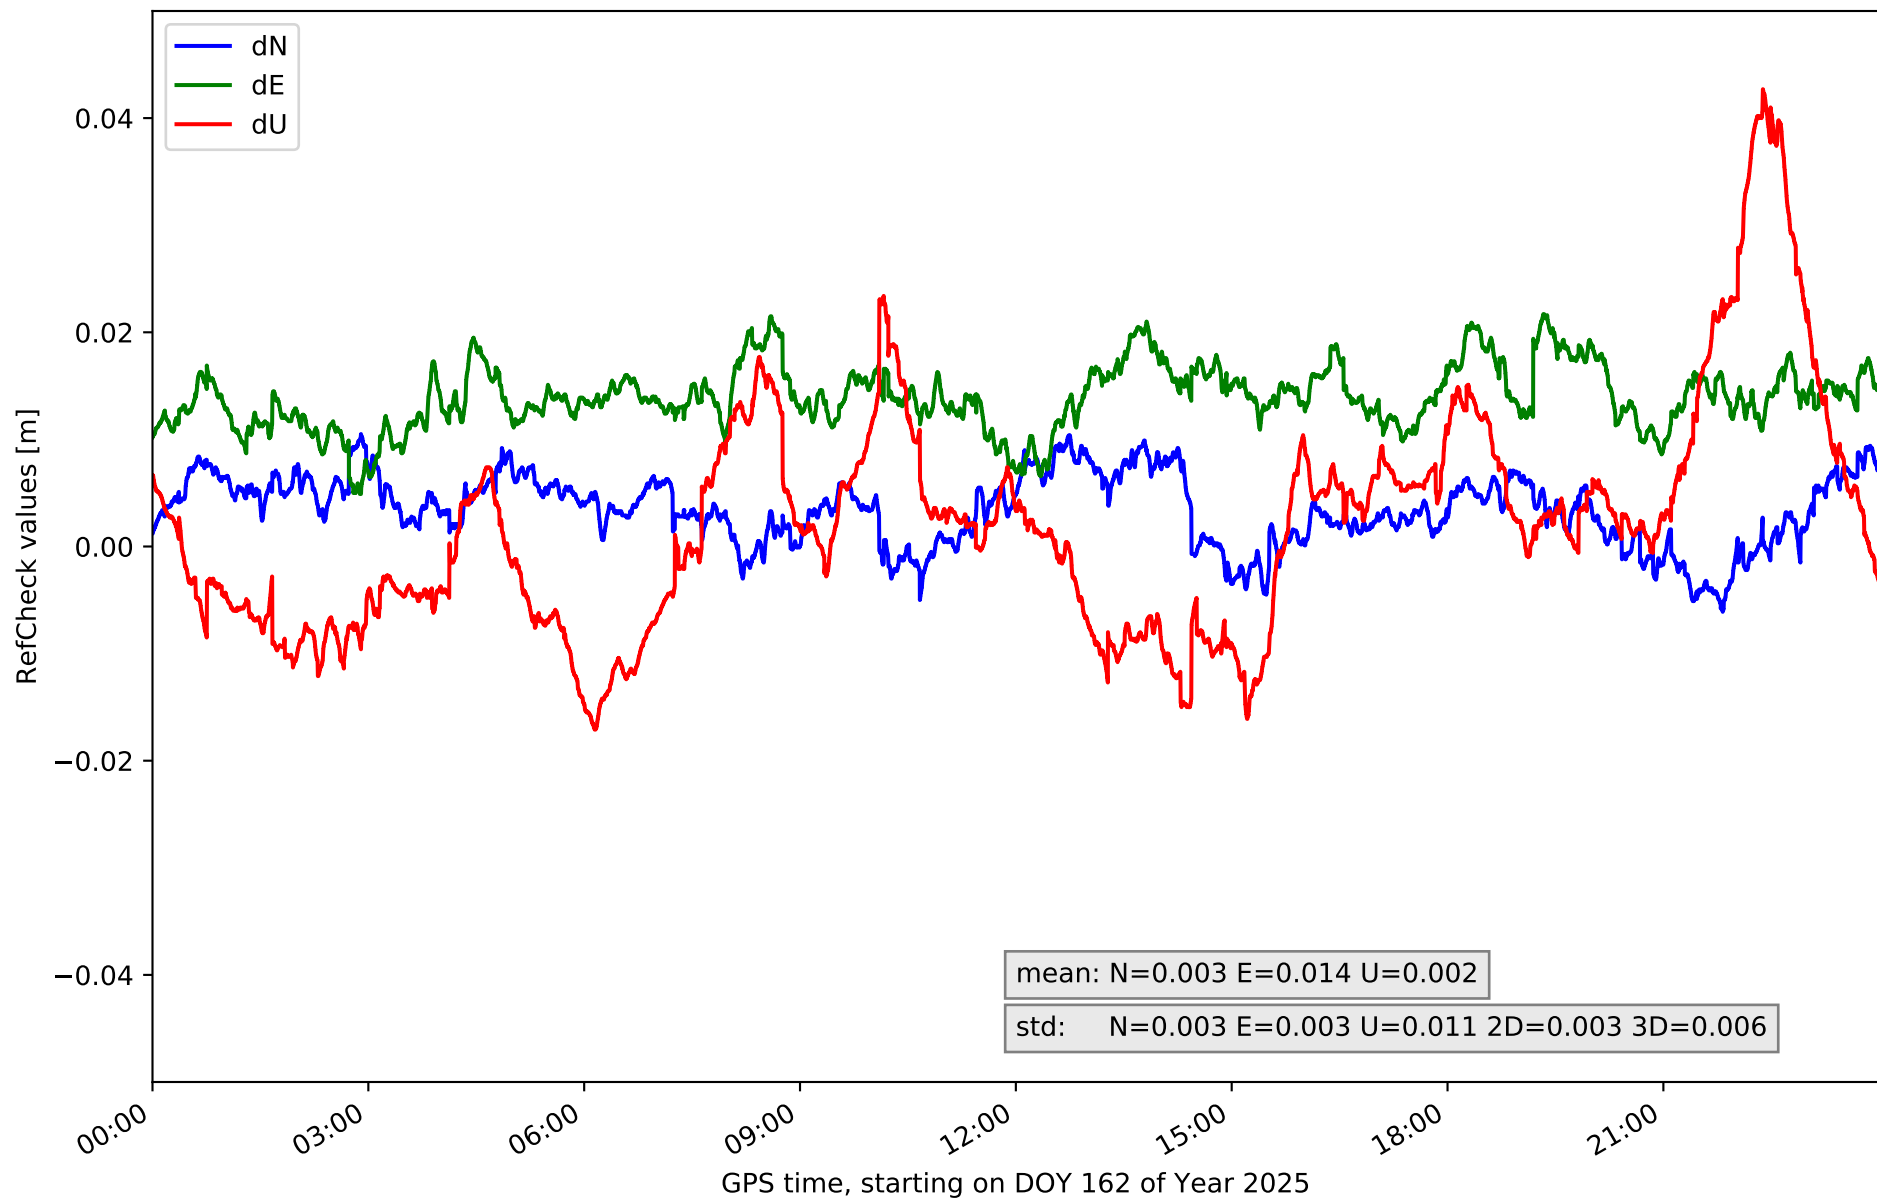


RefCheck for station EH02 in network NT32

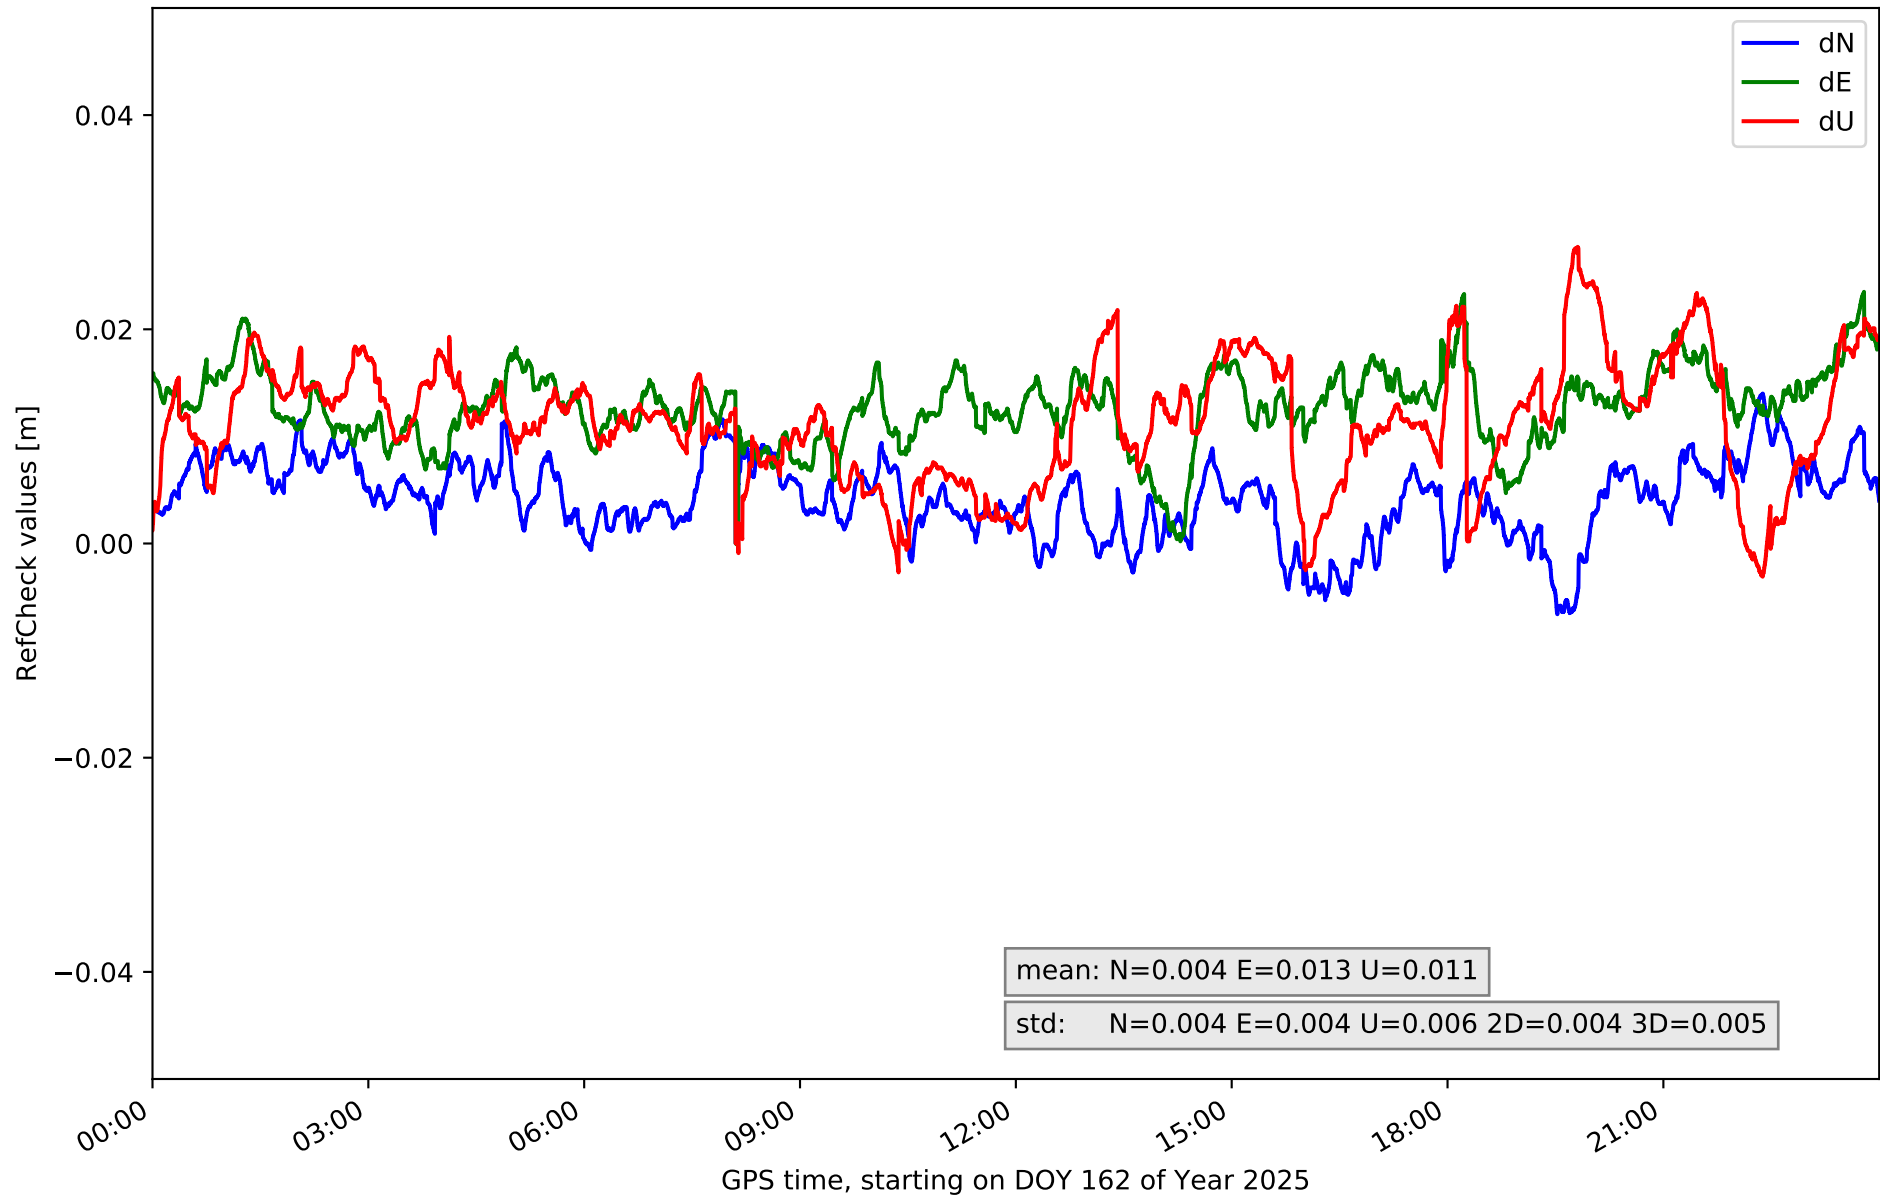


RefCheck for station GOM1 in network NT32

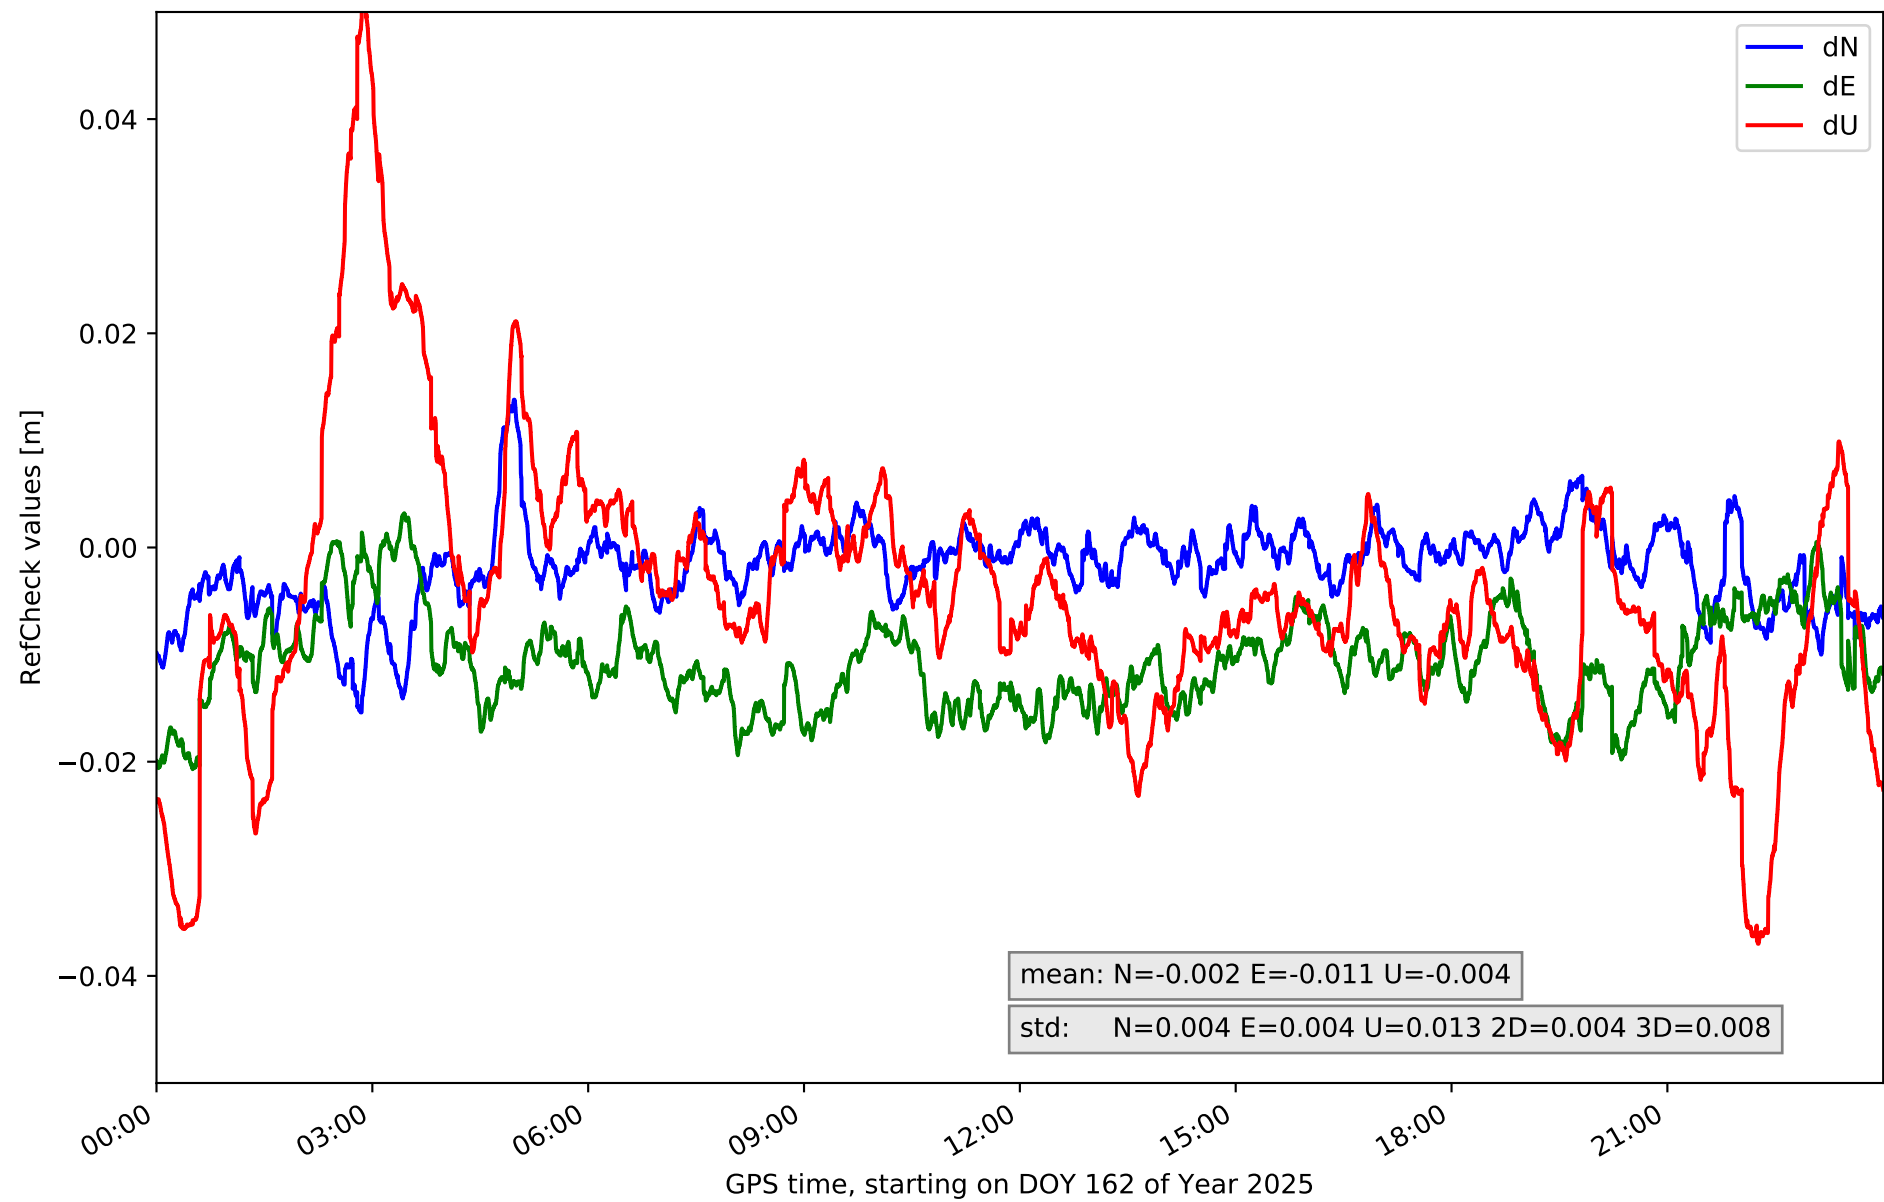


RefCheck for station IZAN in network NT32

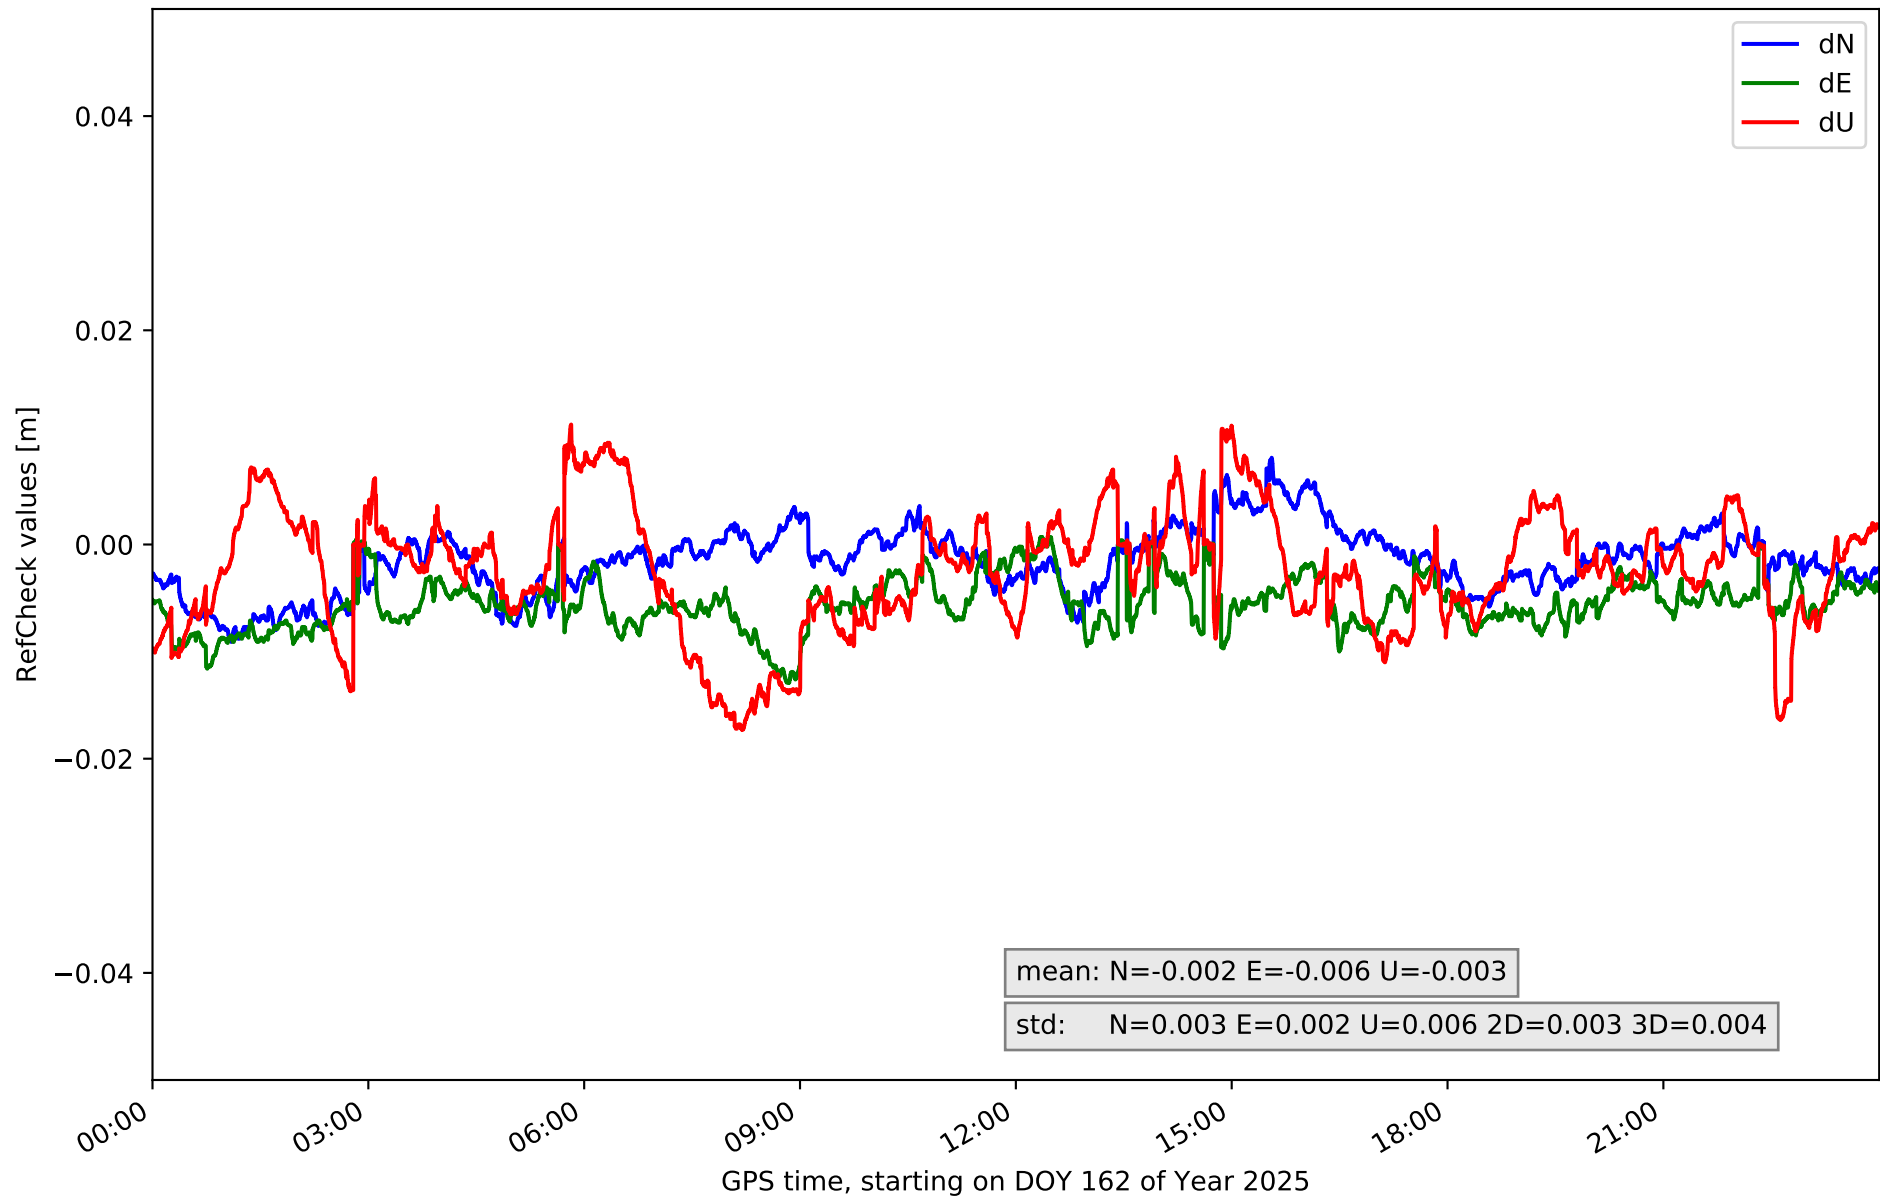


RefCheck for station LP01 in network NT32

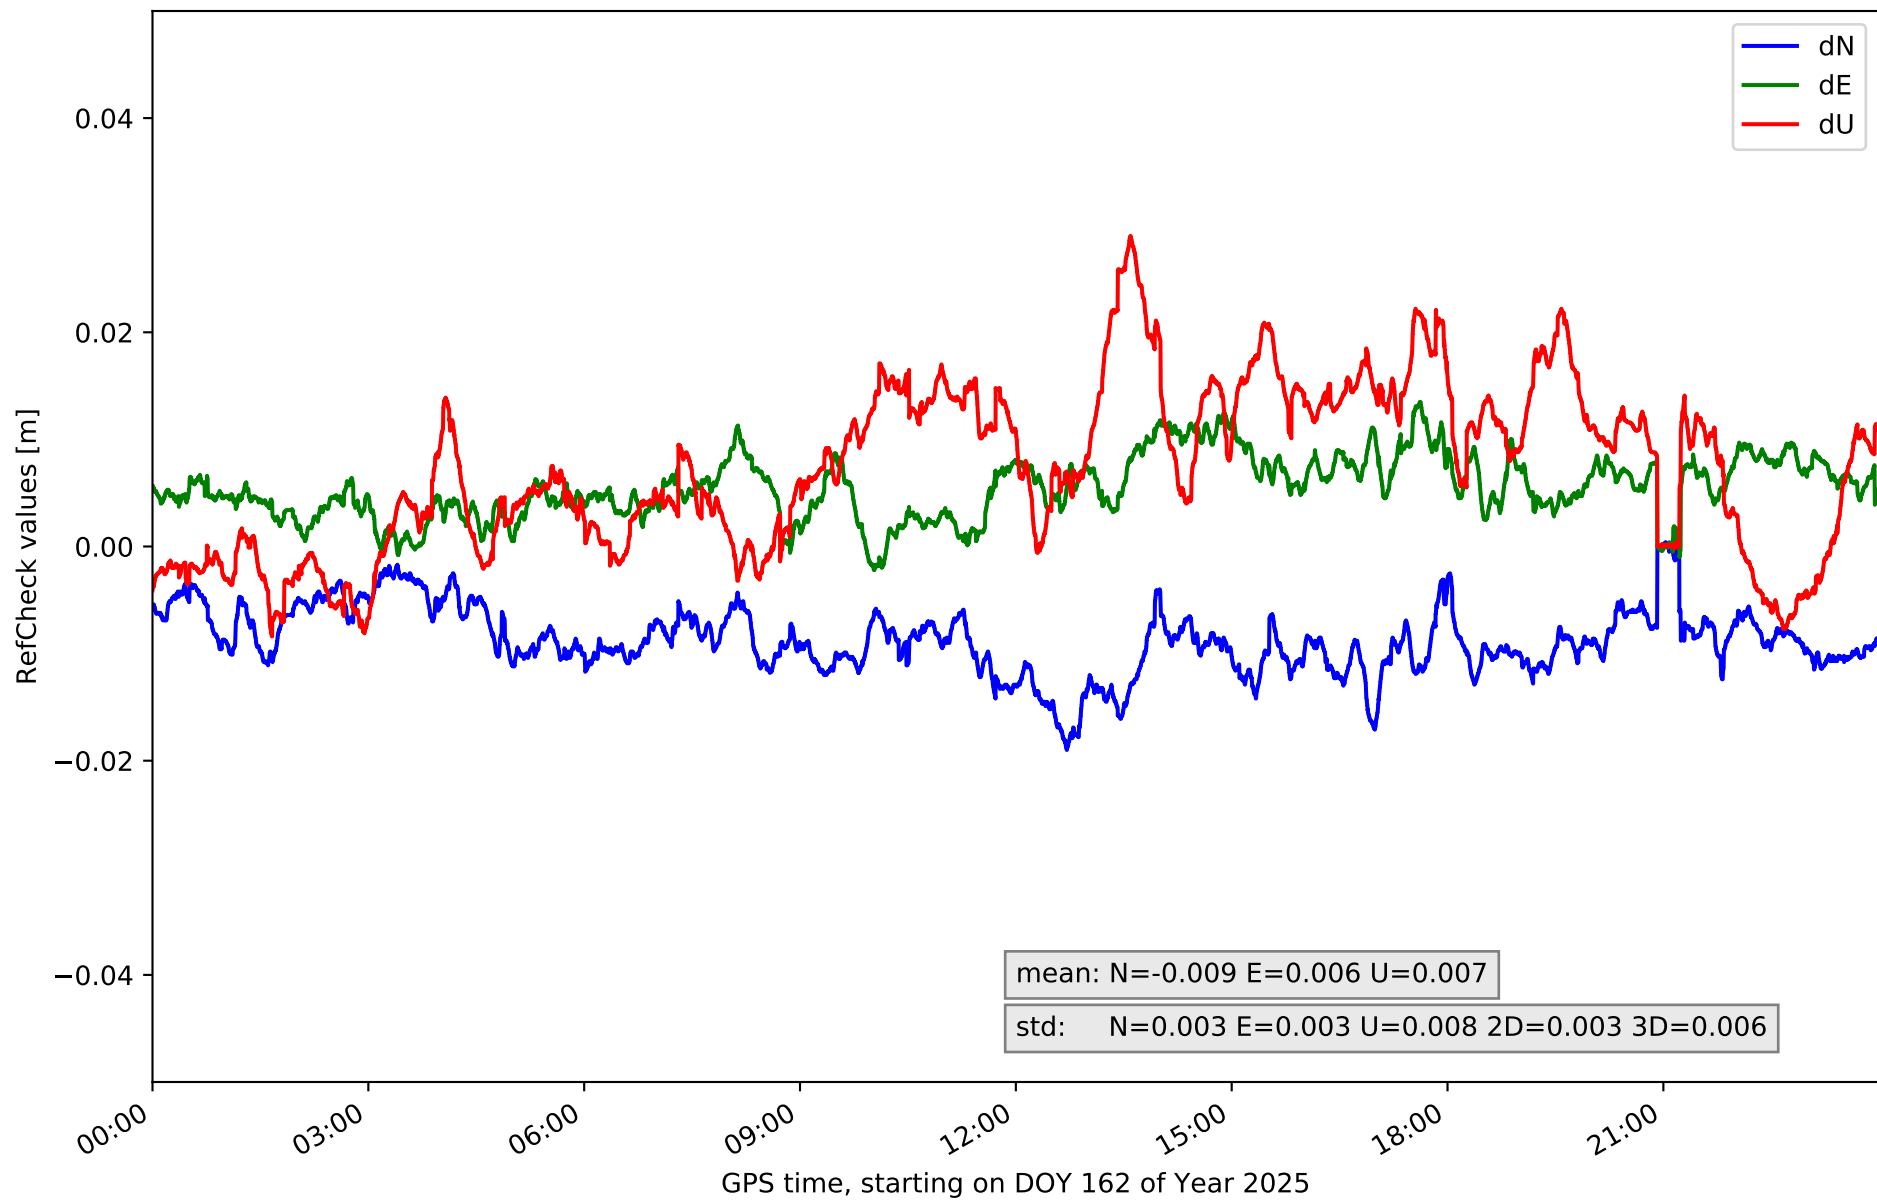


RefCheck for station LP03 in network NT32

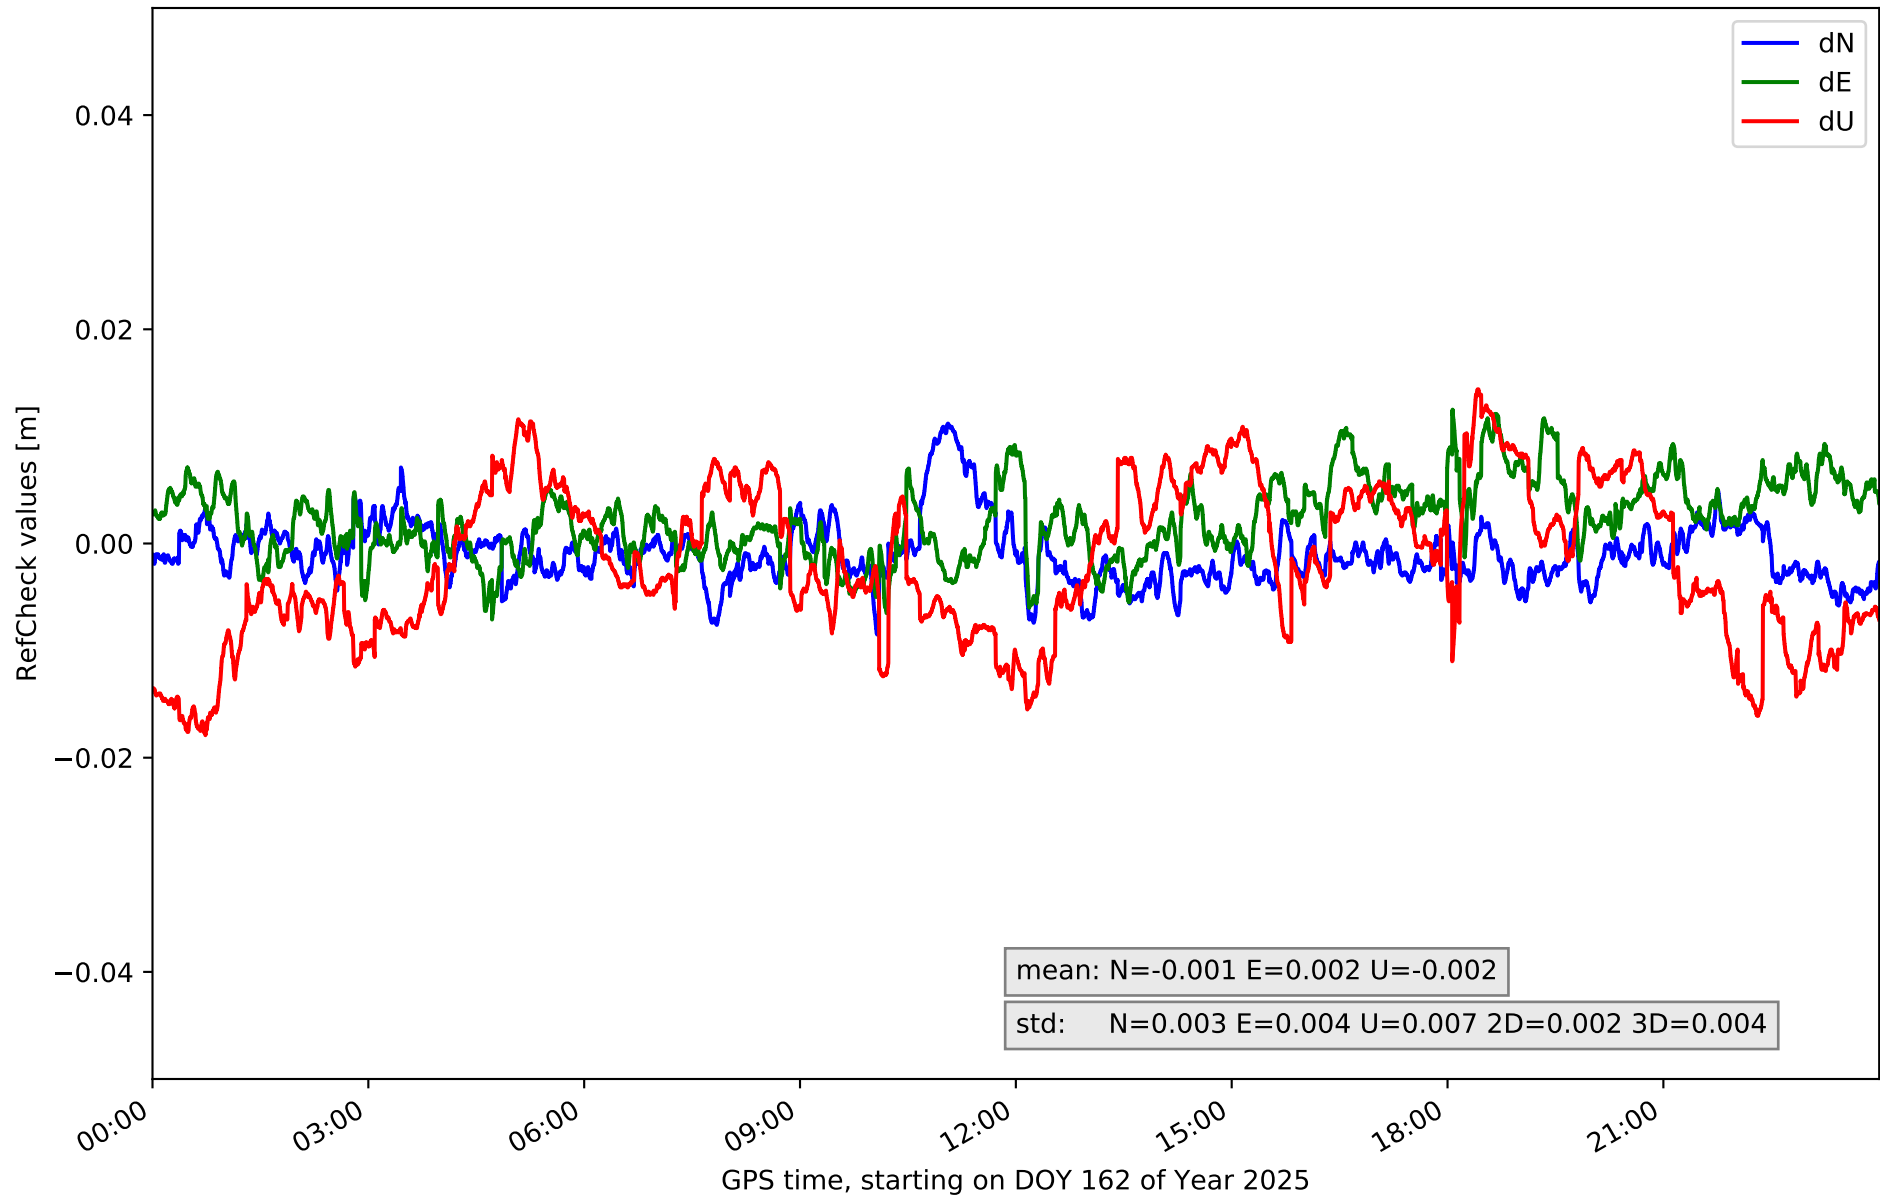


RefCheck for station LPAL in network NT32

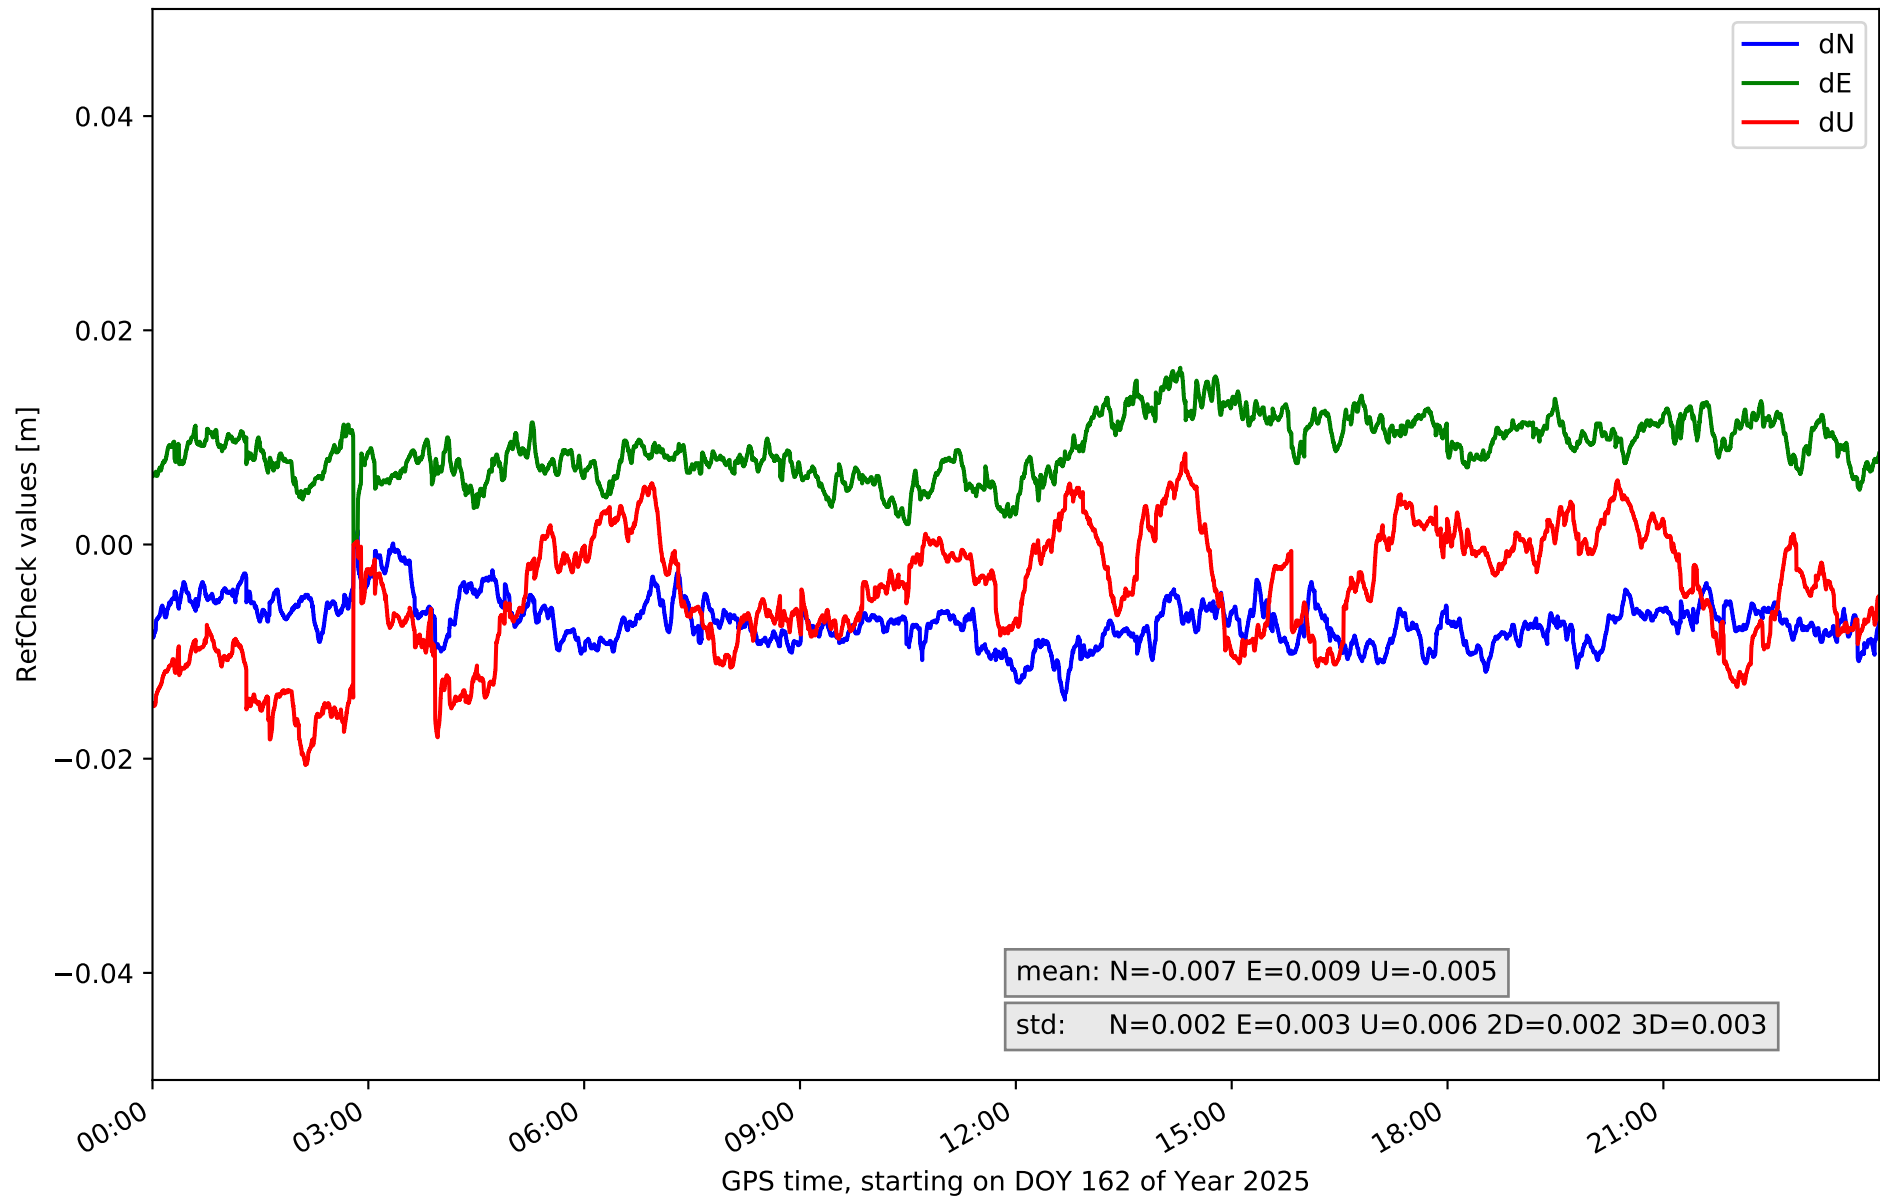


RefCheck for station LRES in network NT32

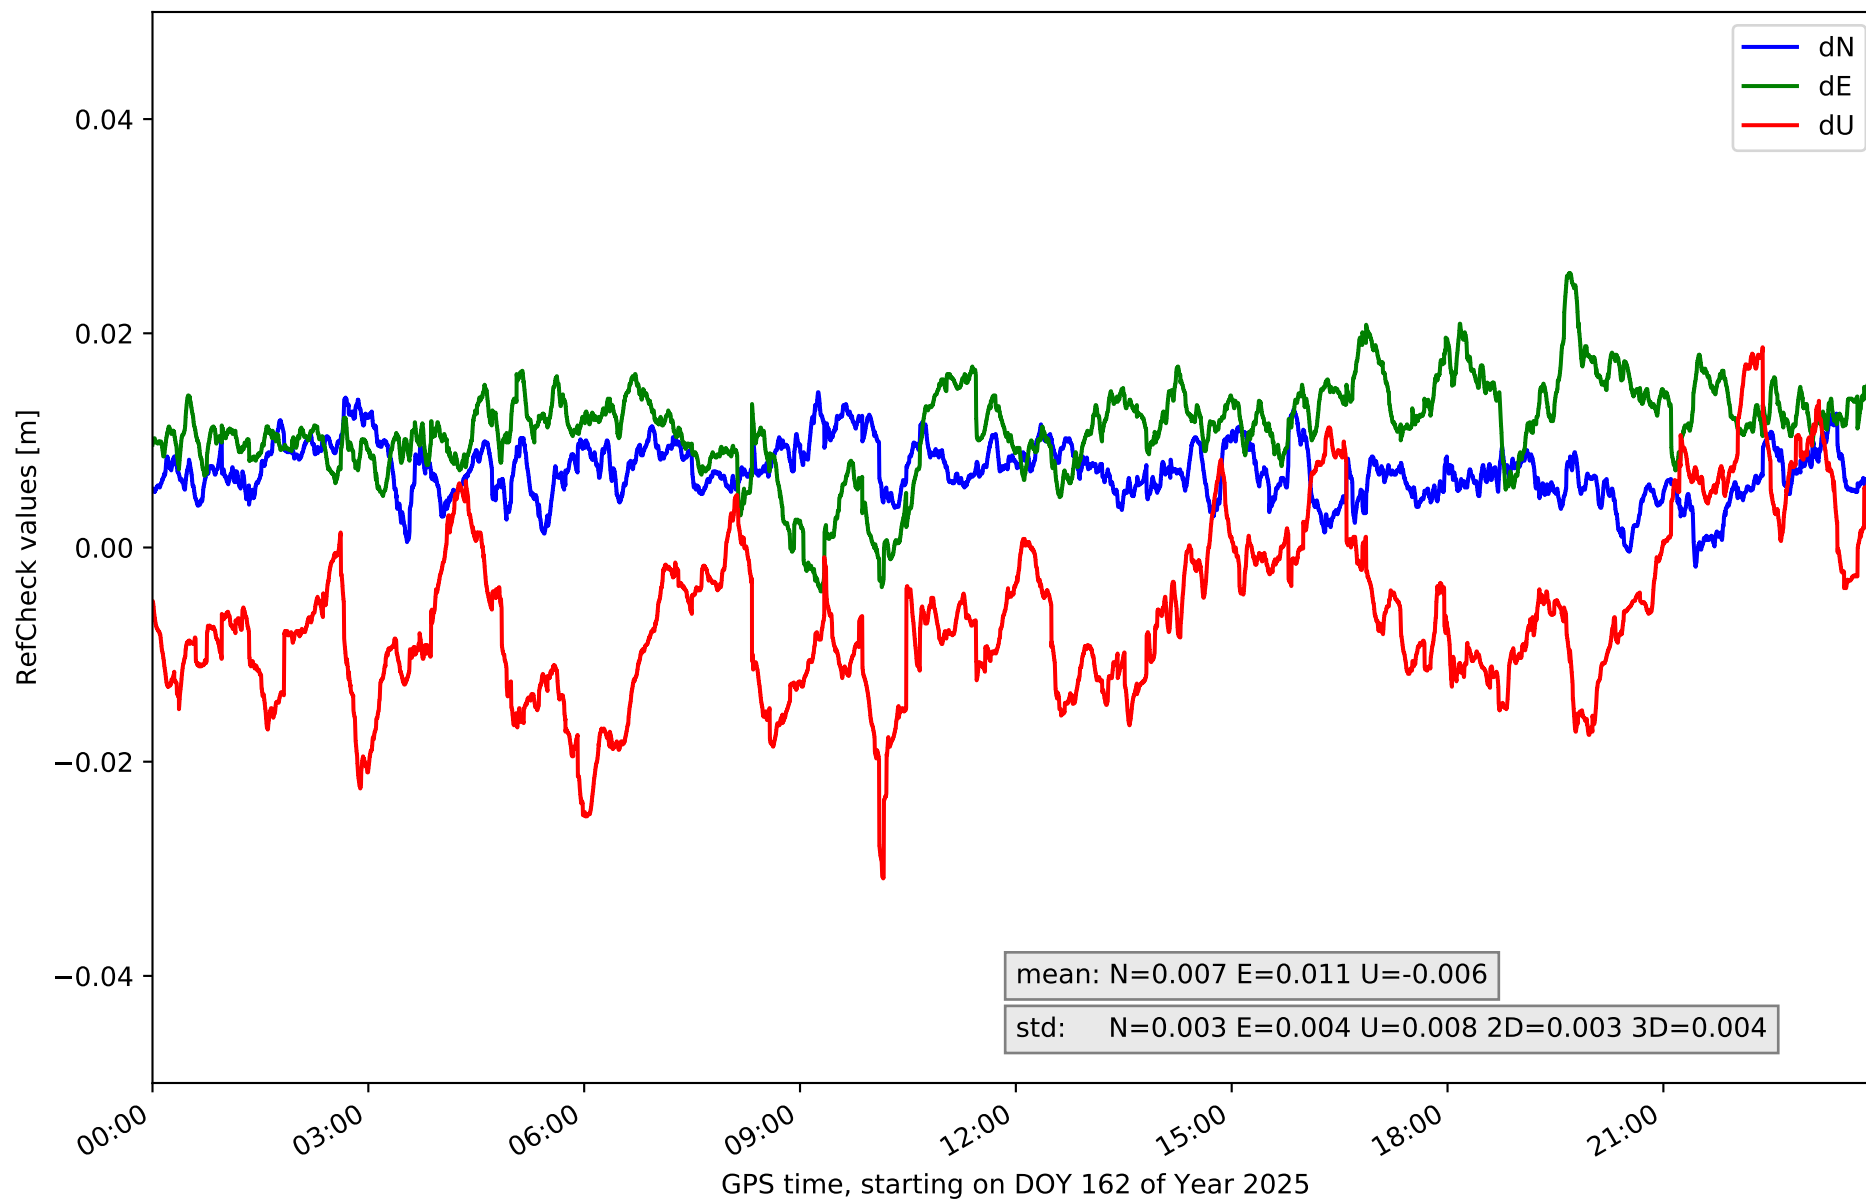


RefCheck for station TN01 in network NT32

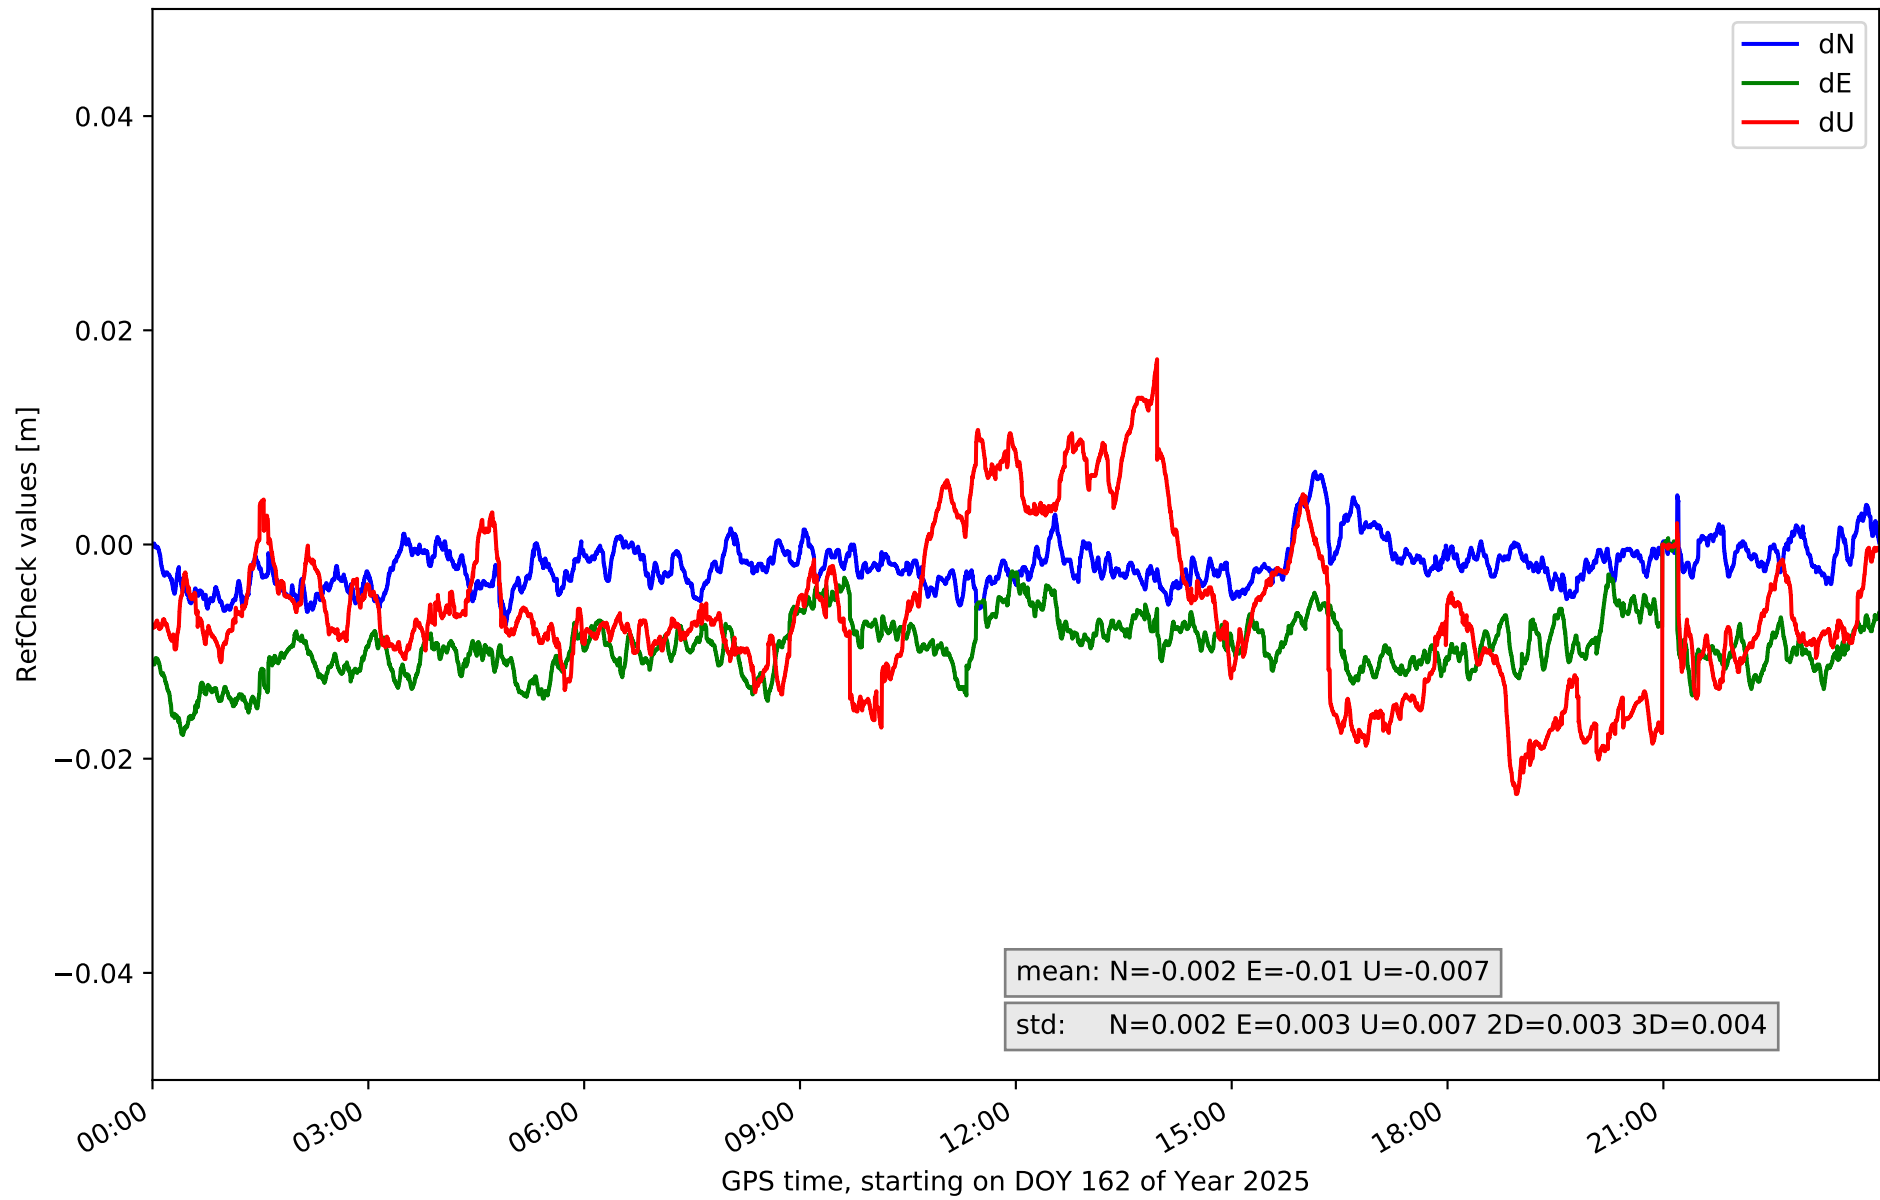


RefCheck for station TN02 in network NT32

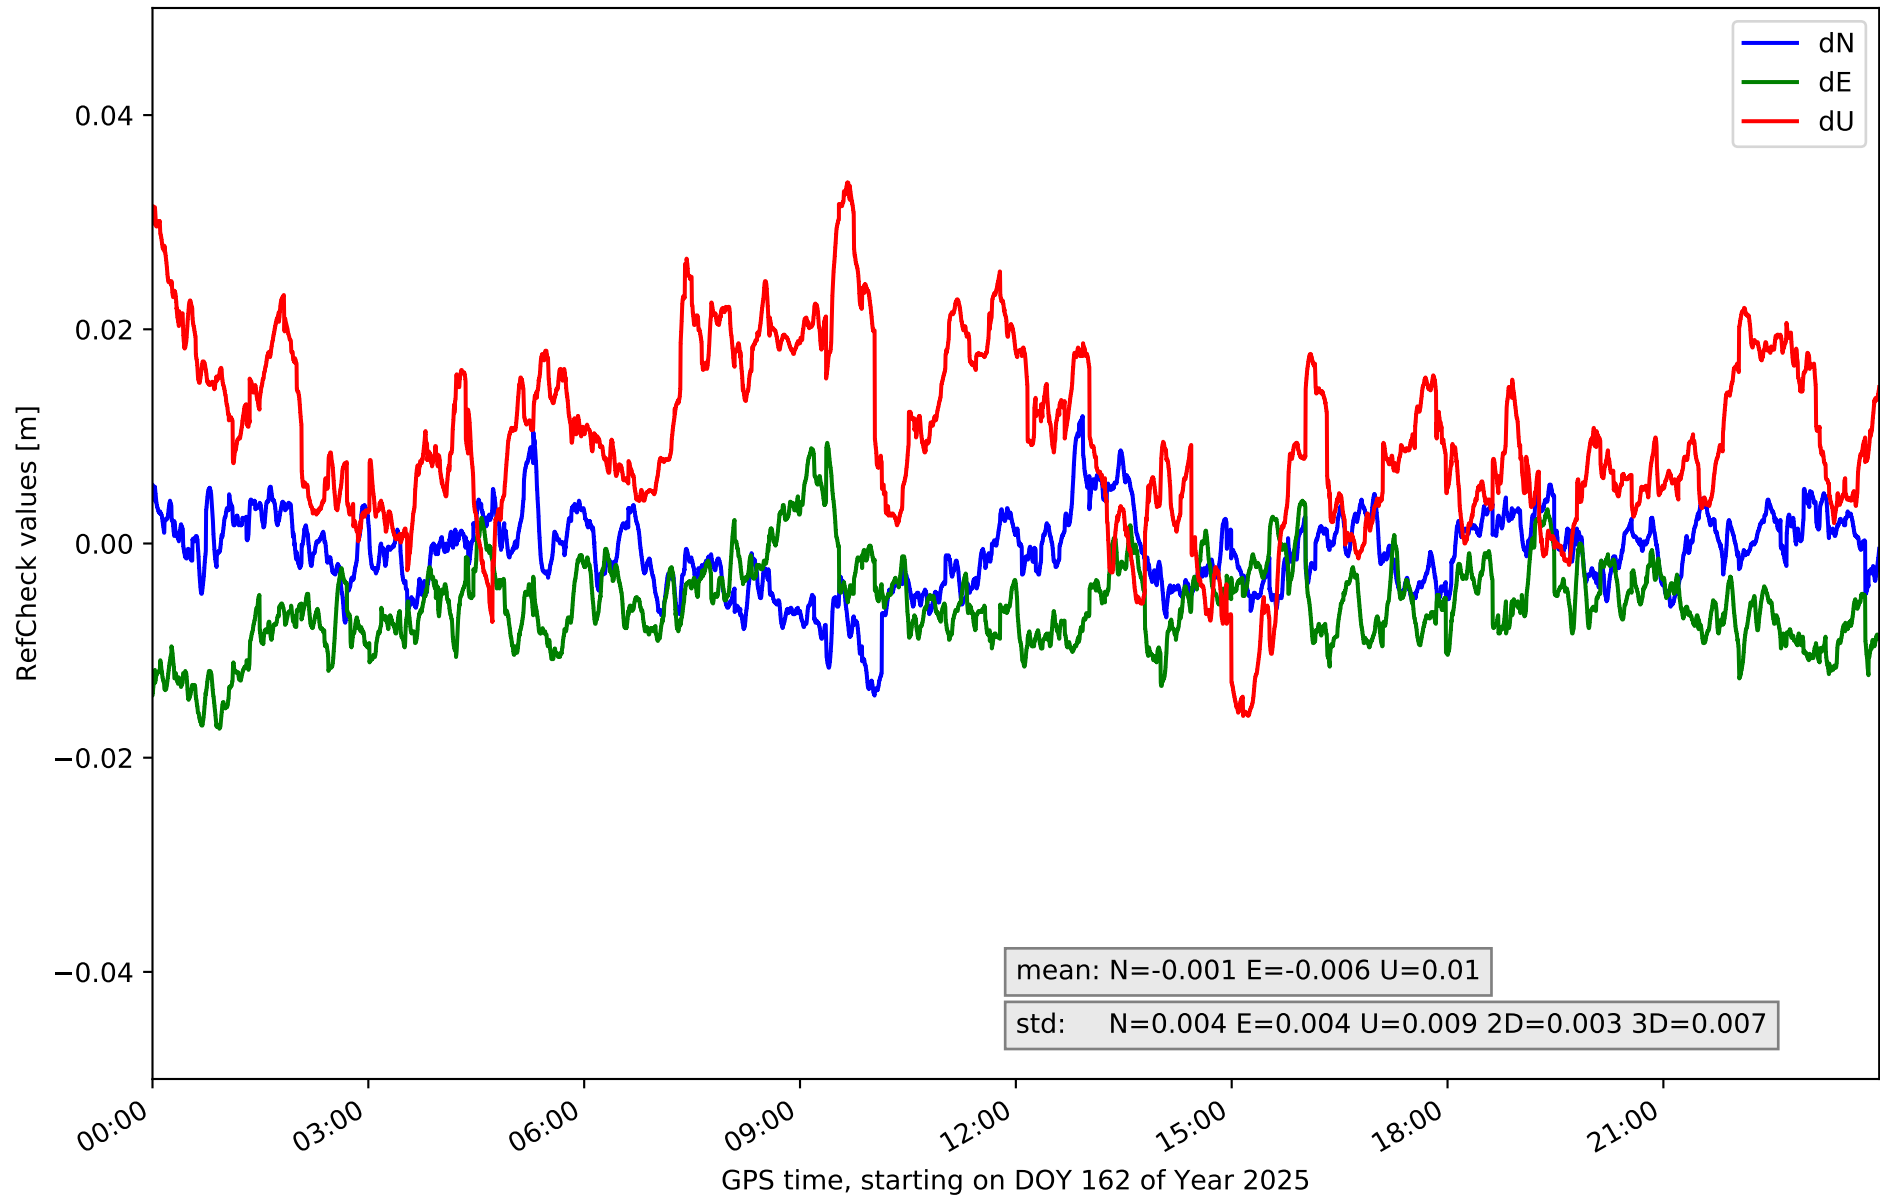


RefCheck for station TN03 in network NT32

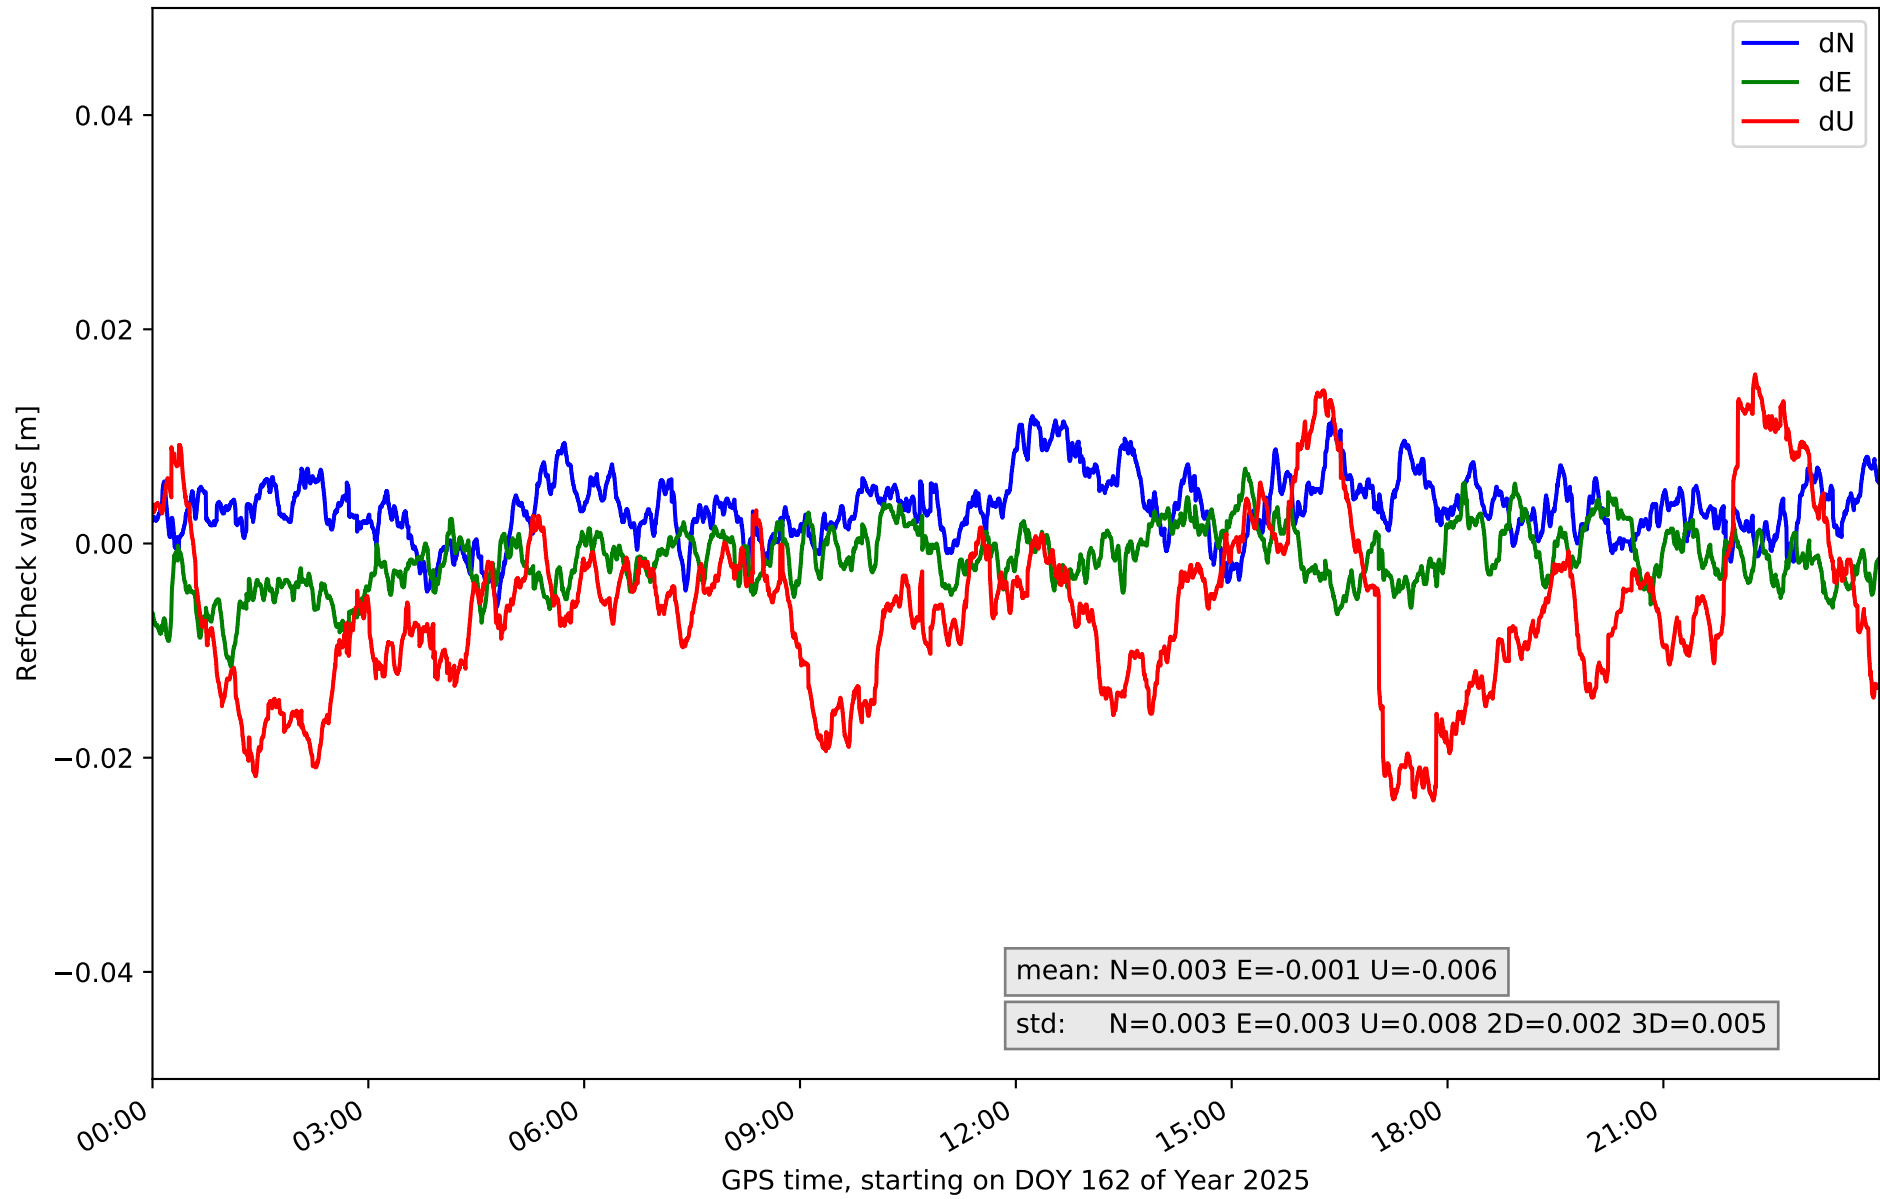


RefCheck for station TN04 in network NT32

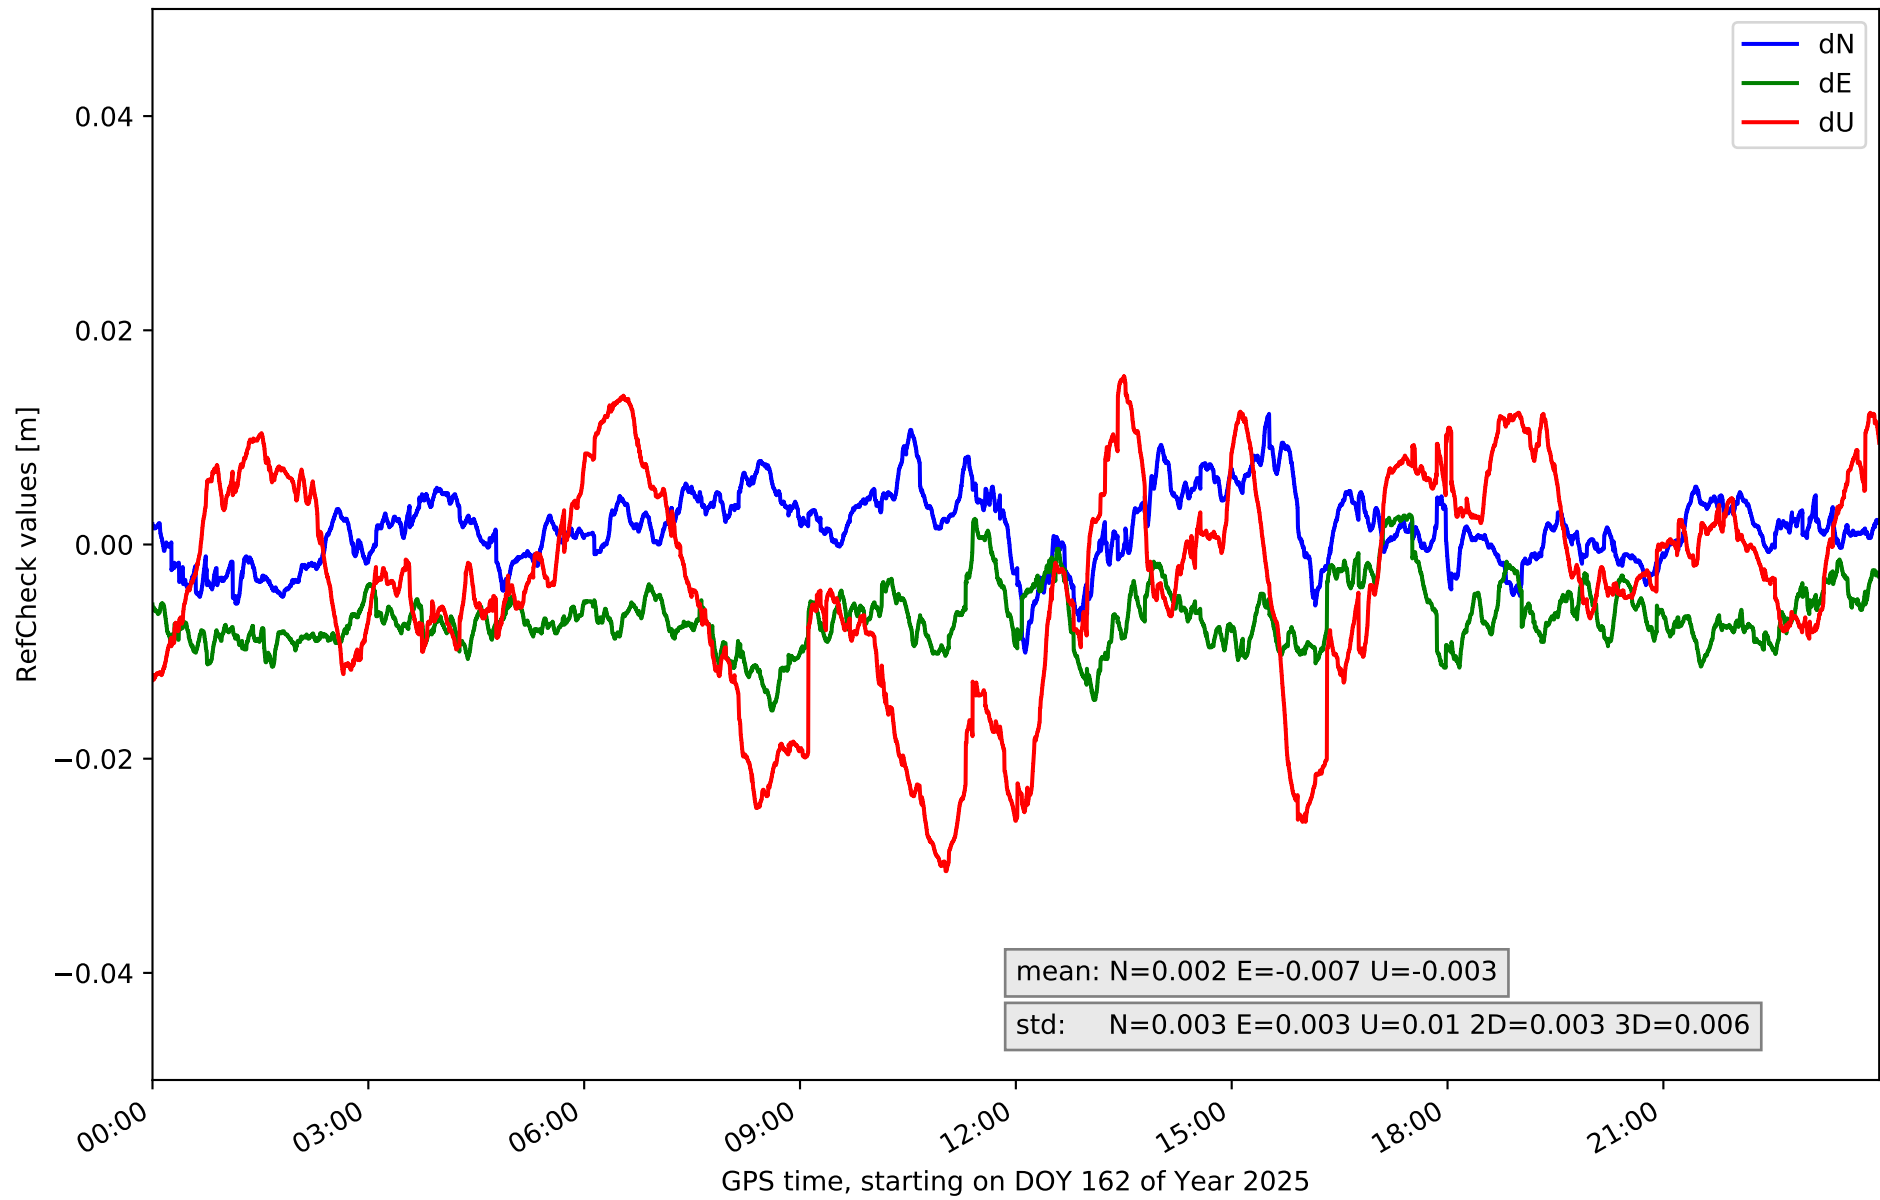


RefCheck for station TN06 in network NT32

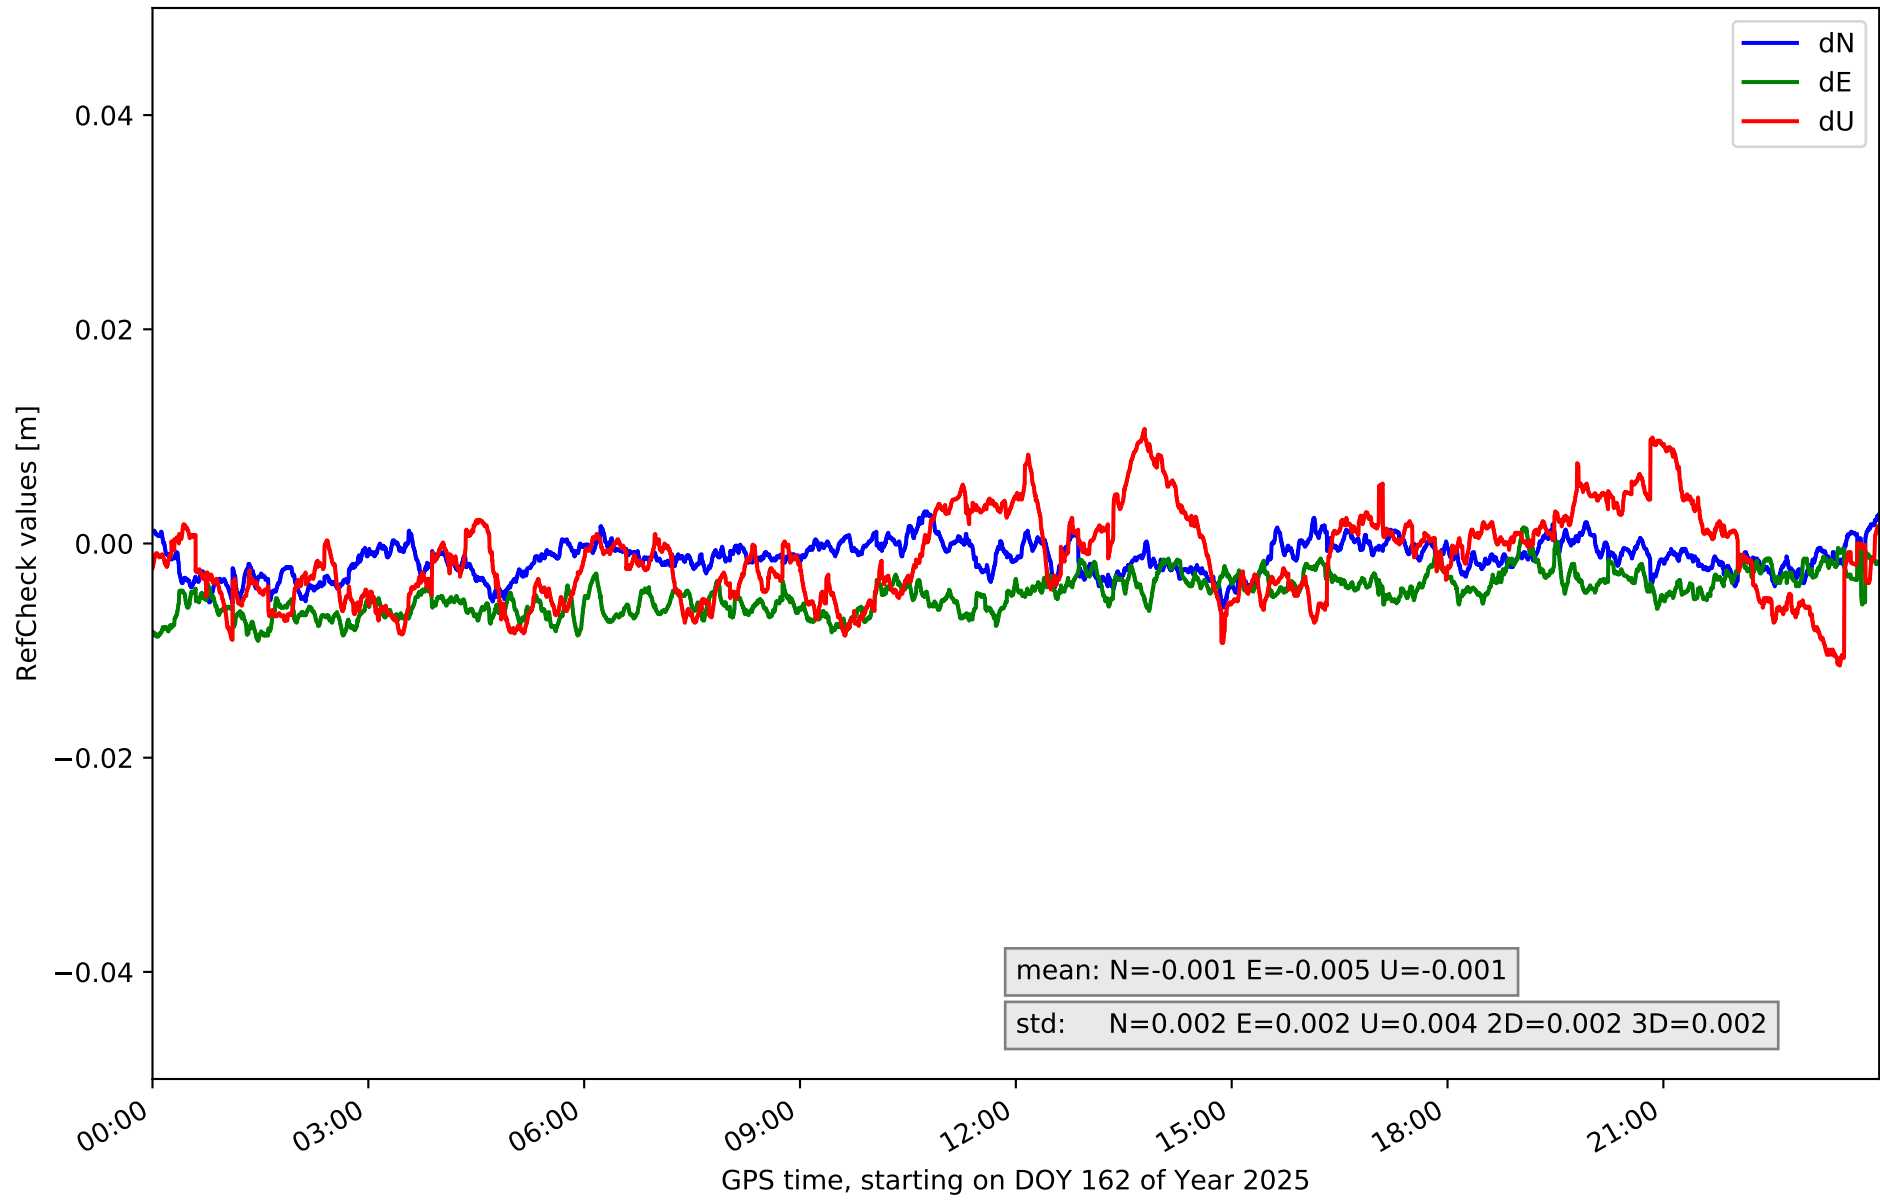

RefCheck for station TN09 in network NT32

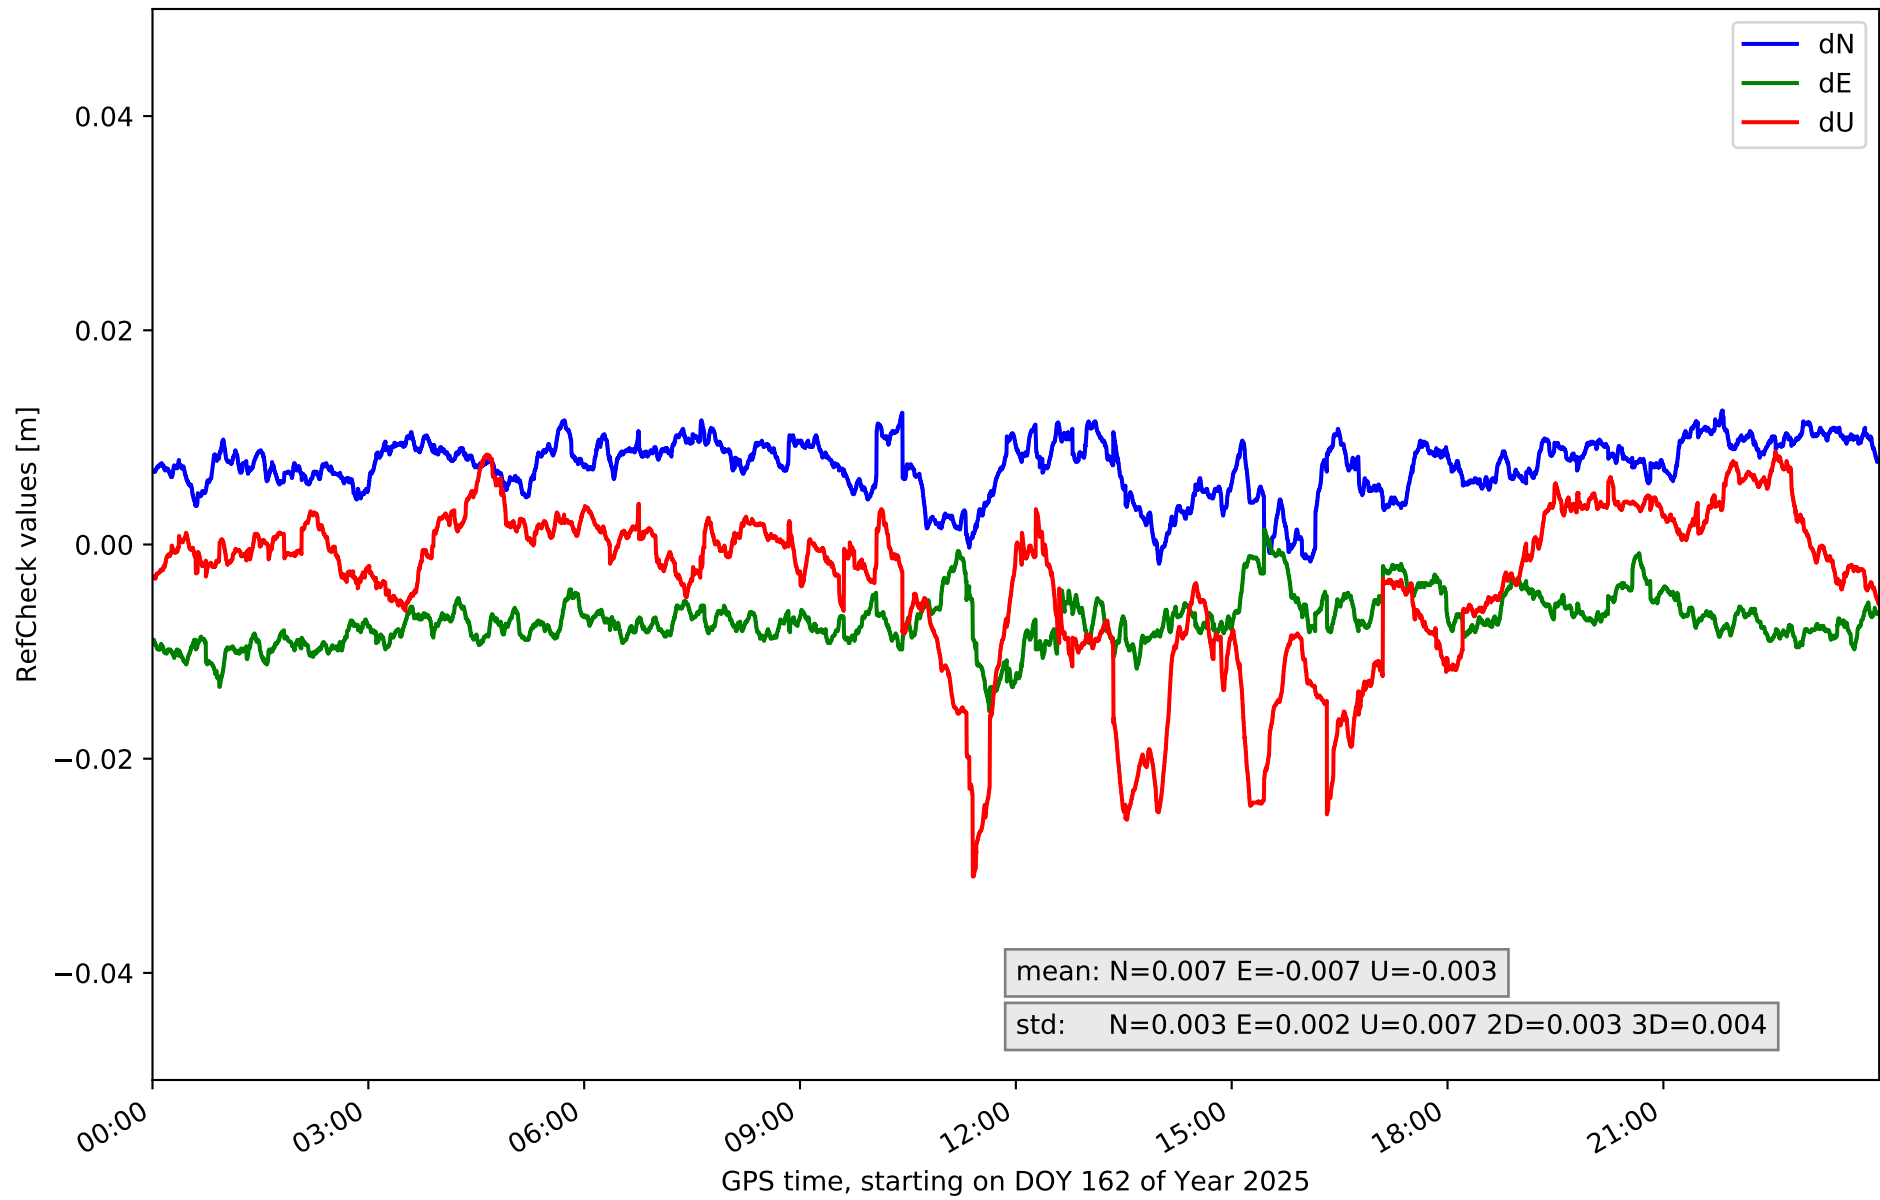

RefCheck for station TE11 in network NT32

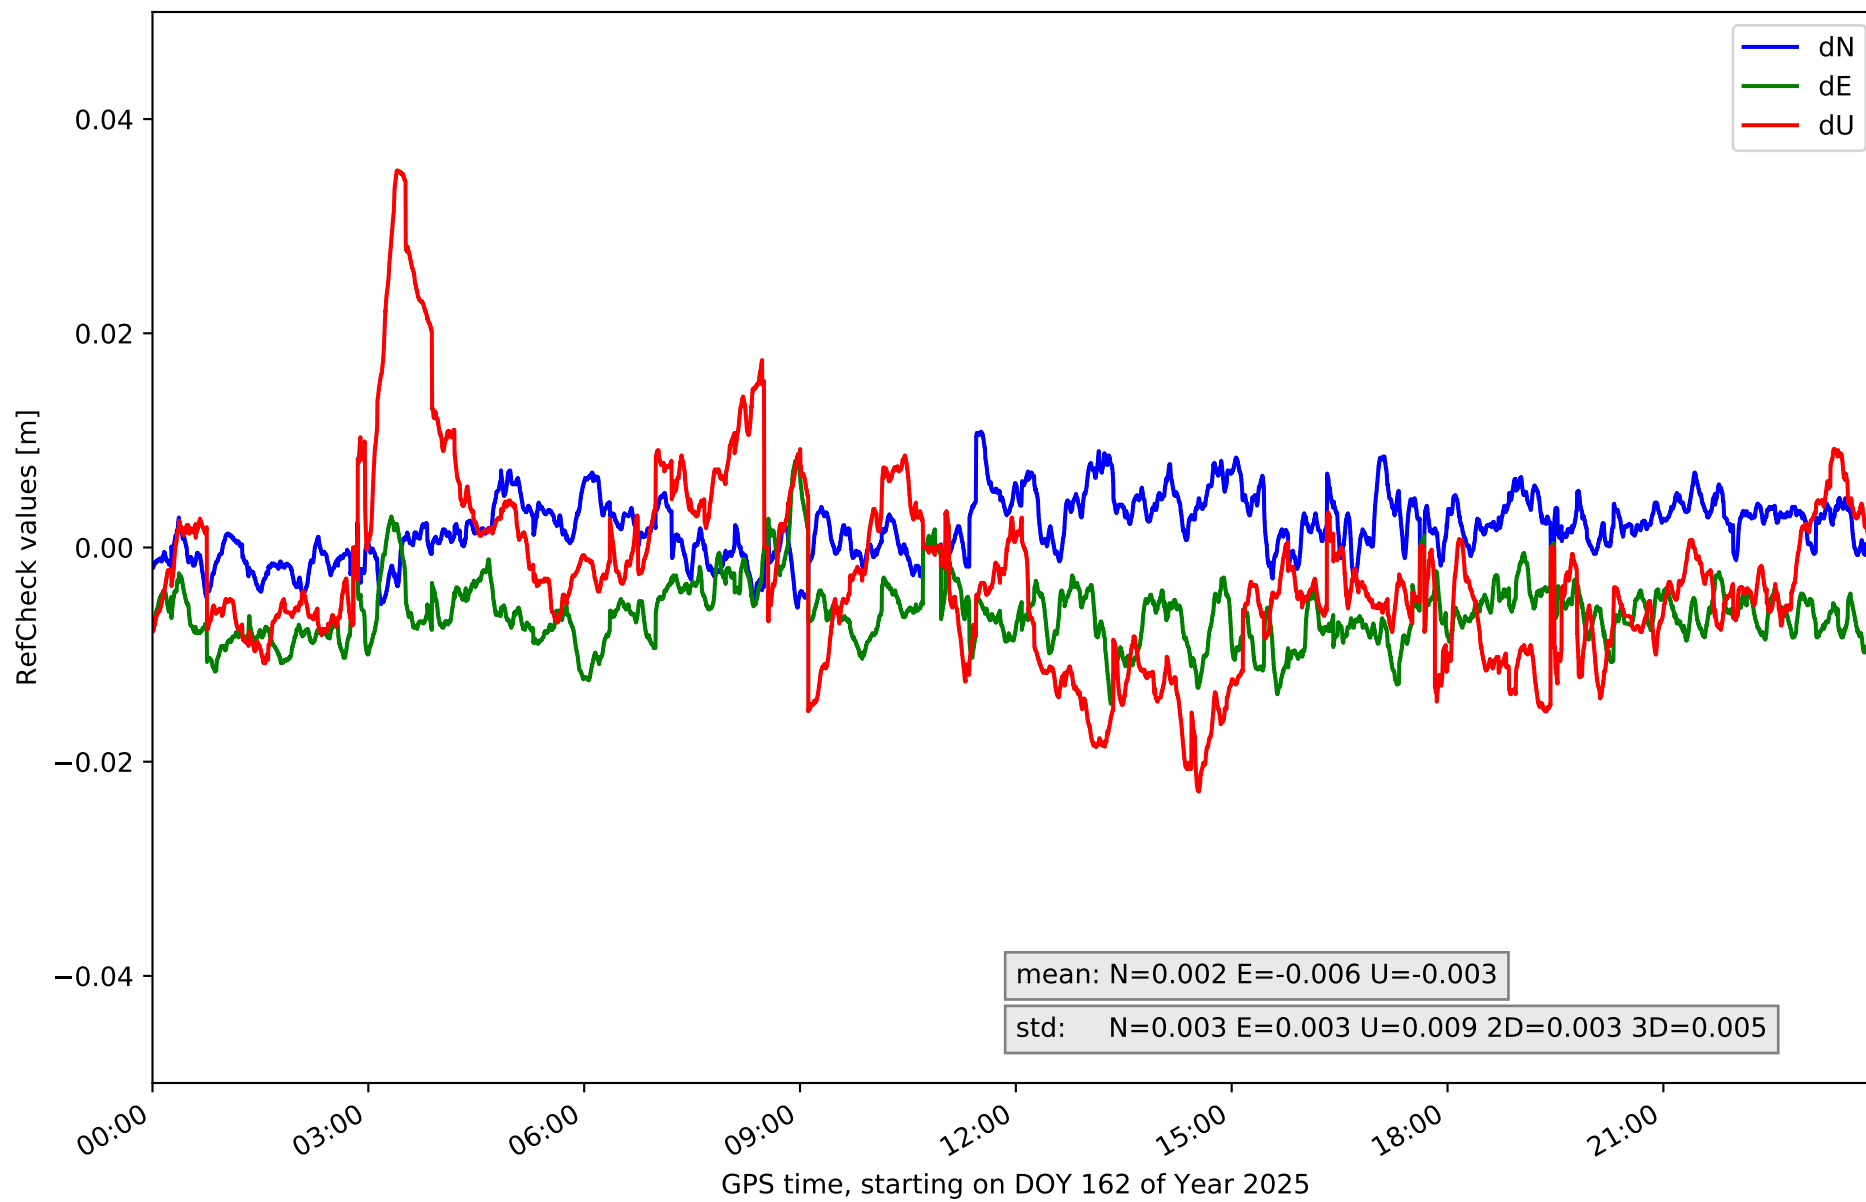

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.006	0.011	0.003	0.005	0.022	0.003	-0.017	0.043	0.011	0.003	0.006	71002	97.2	17848	24.4
EH02	-0.007	0.014	0.004	-0.0	0.024	0.004	-0.003	0.028	0.006	0.004	0.005	63550	87.0	23321	31.9
GOM1	-0.015	0.014	0.004	-0.021	0.003	0.004	-0.037	0.053	0.013	0.004	0.008	48684	66.7	15850	21.7
IZAN	-0.009	0.008	0.003	-0.013	0.001	0.002	-0.017	0.011	0.006	0.003	0.004	8716	11.9	0	0.0
LP01	-0.019	0.001	0.003	-0.002	0.013	0.003	-0.008	0.029	0.008	0.003	0.006	46845	64.2	10996	15.1
LP03	-0.009	0.011	0.003	-0.007	0.013	0.004	-0.018	0.014	0.007	0.002	0.004	2487	3.4	0	0.0
LPAL	-0.015	0.001	0.002	0.0	0.017	0.003	-0.021	0.009	0.006	0.002	0.003	56661	77.6	1034	1.4
LRES	-0.002	0.015	0.003	-0.004	0.026	0.004	-0.031	0.019	0.008	0.003	0.004	66654	91.3	13747	18.8
TN01	-0.007	0.007	0.002	-0.018	0.001	0.003	-0.023	0.017	0.007	0.003	0.004	36515	50.0	3908	5.4
TN02	-0.014	0.012	0.004	-0.017	0.009	0.004	-0.016	0.034	0.009	0.003	0.007	11692	16.0	14457	19.8
TN03	-0.007	0.012	0.003	-0.011	0.007	0.003	-0.024	0.016	0.008	0.002	0.005	3124	4.3	3512	4.8
TN04	-0.01	0.012	0.003	-0.015	0.003	0.003	-0.03	0.016	0.01	0.003	0.006	14586	20.0	8808	12.1
TN06	-0.006	0.003	0.002	-0.009	0.002	0.002	-0.011	0.011	0.004	0.002	0.002	0	0.0	0	0.0
TN09	-0.002	0.013	0.003	-0.016	0.001	0.002	-0.031	0.009	0.007	0.003	0.004	47978	65.7	5136	7.0
TE11	-0.006	0.011	0.003	-0.015	0.008	0.003	-0.023	0.035	0.009	0.003	0.005	9065	12.4	4021	5.5
Mean	-0.009	0.01	0.003	-0.01	0.01	0.003	-0.021	0.023	0.008	0.003	0.005	32503.9	44.5	8175.9	11.2
Min/Max	-0.019	0.015	0.004	-0.021	0.026	0.004	-0.037	0.053	0.013	0.004	0.008	71002	97.2	23321	31.9

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	92.0	93.1	89.1	94.2	90.4
considering satellites with dual-frequency fixed	88.3	88.5	82.7	92.0	88.7
considering all signals separately	88.6	88.5	82.7	92.2	87.2