

summary for network N32T

timeperiod chosen: from 2025-08-11-00:00:00 until 2025-08-11-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.6 seconds


average fixing percentage with threshold set to 0.3: 94.4 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

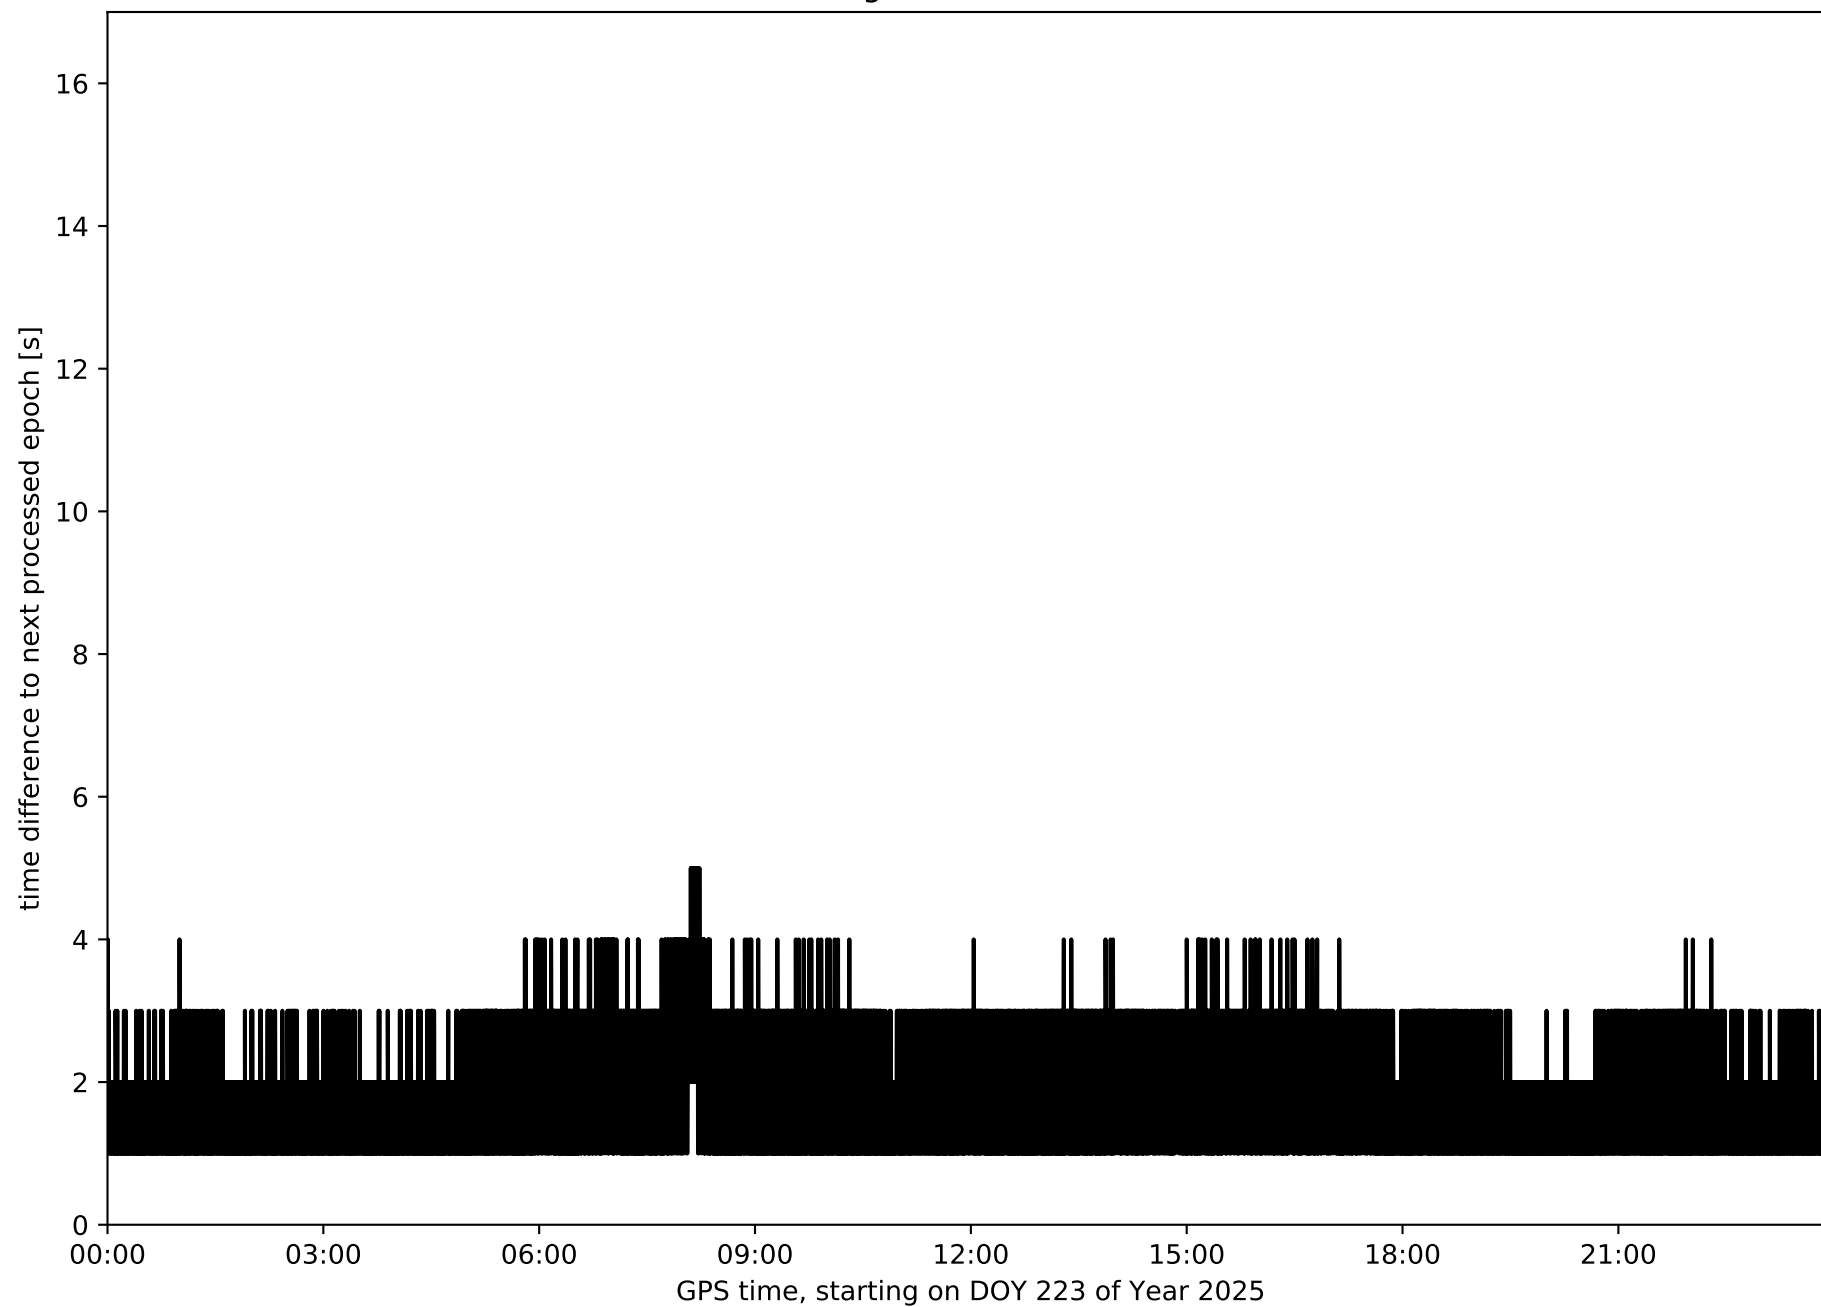


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

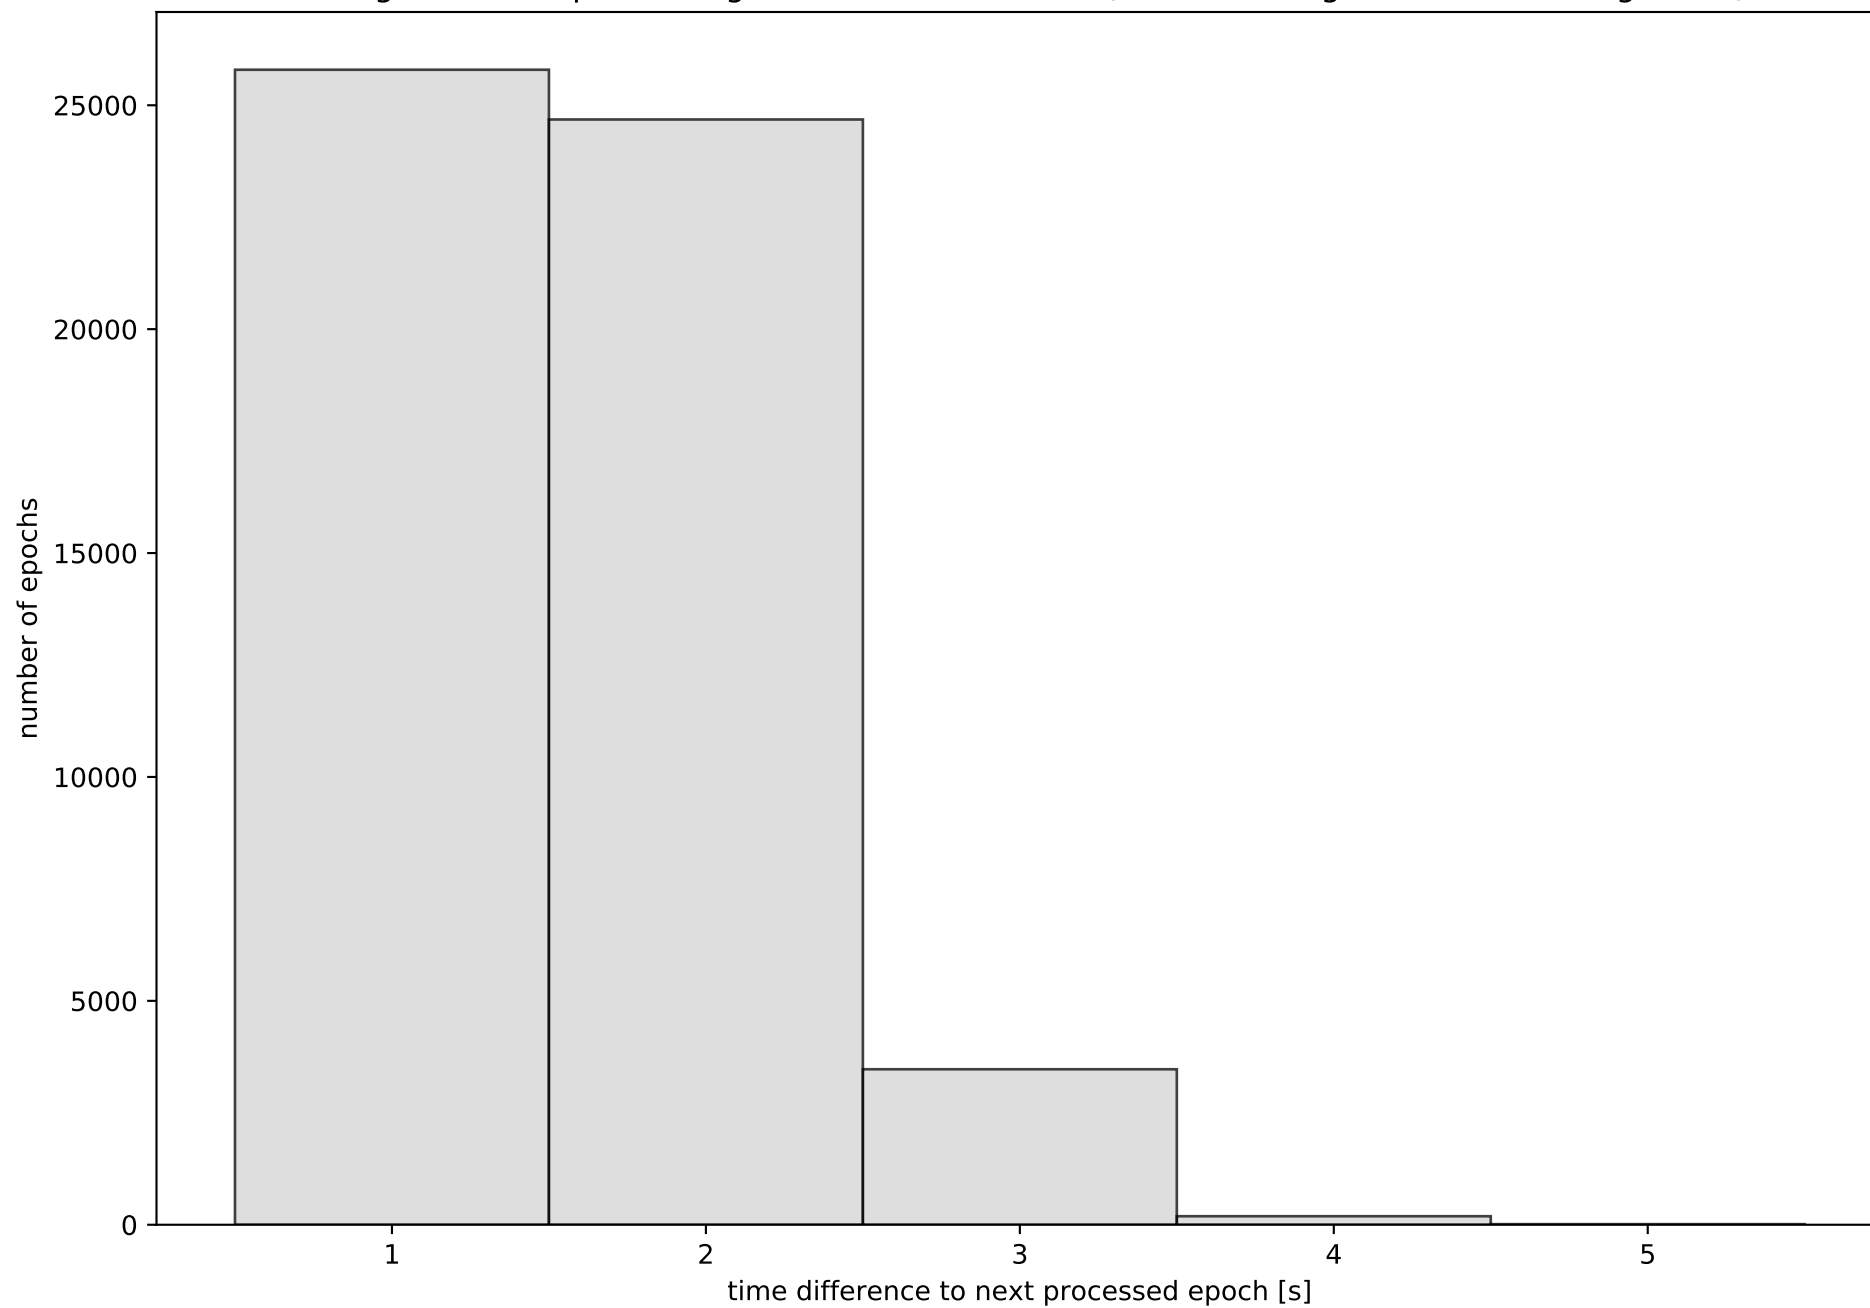


Network N32T with threshold set to 0.3

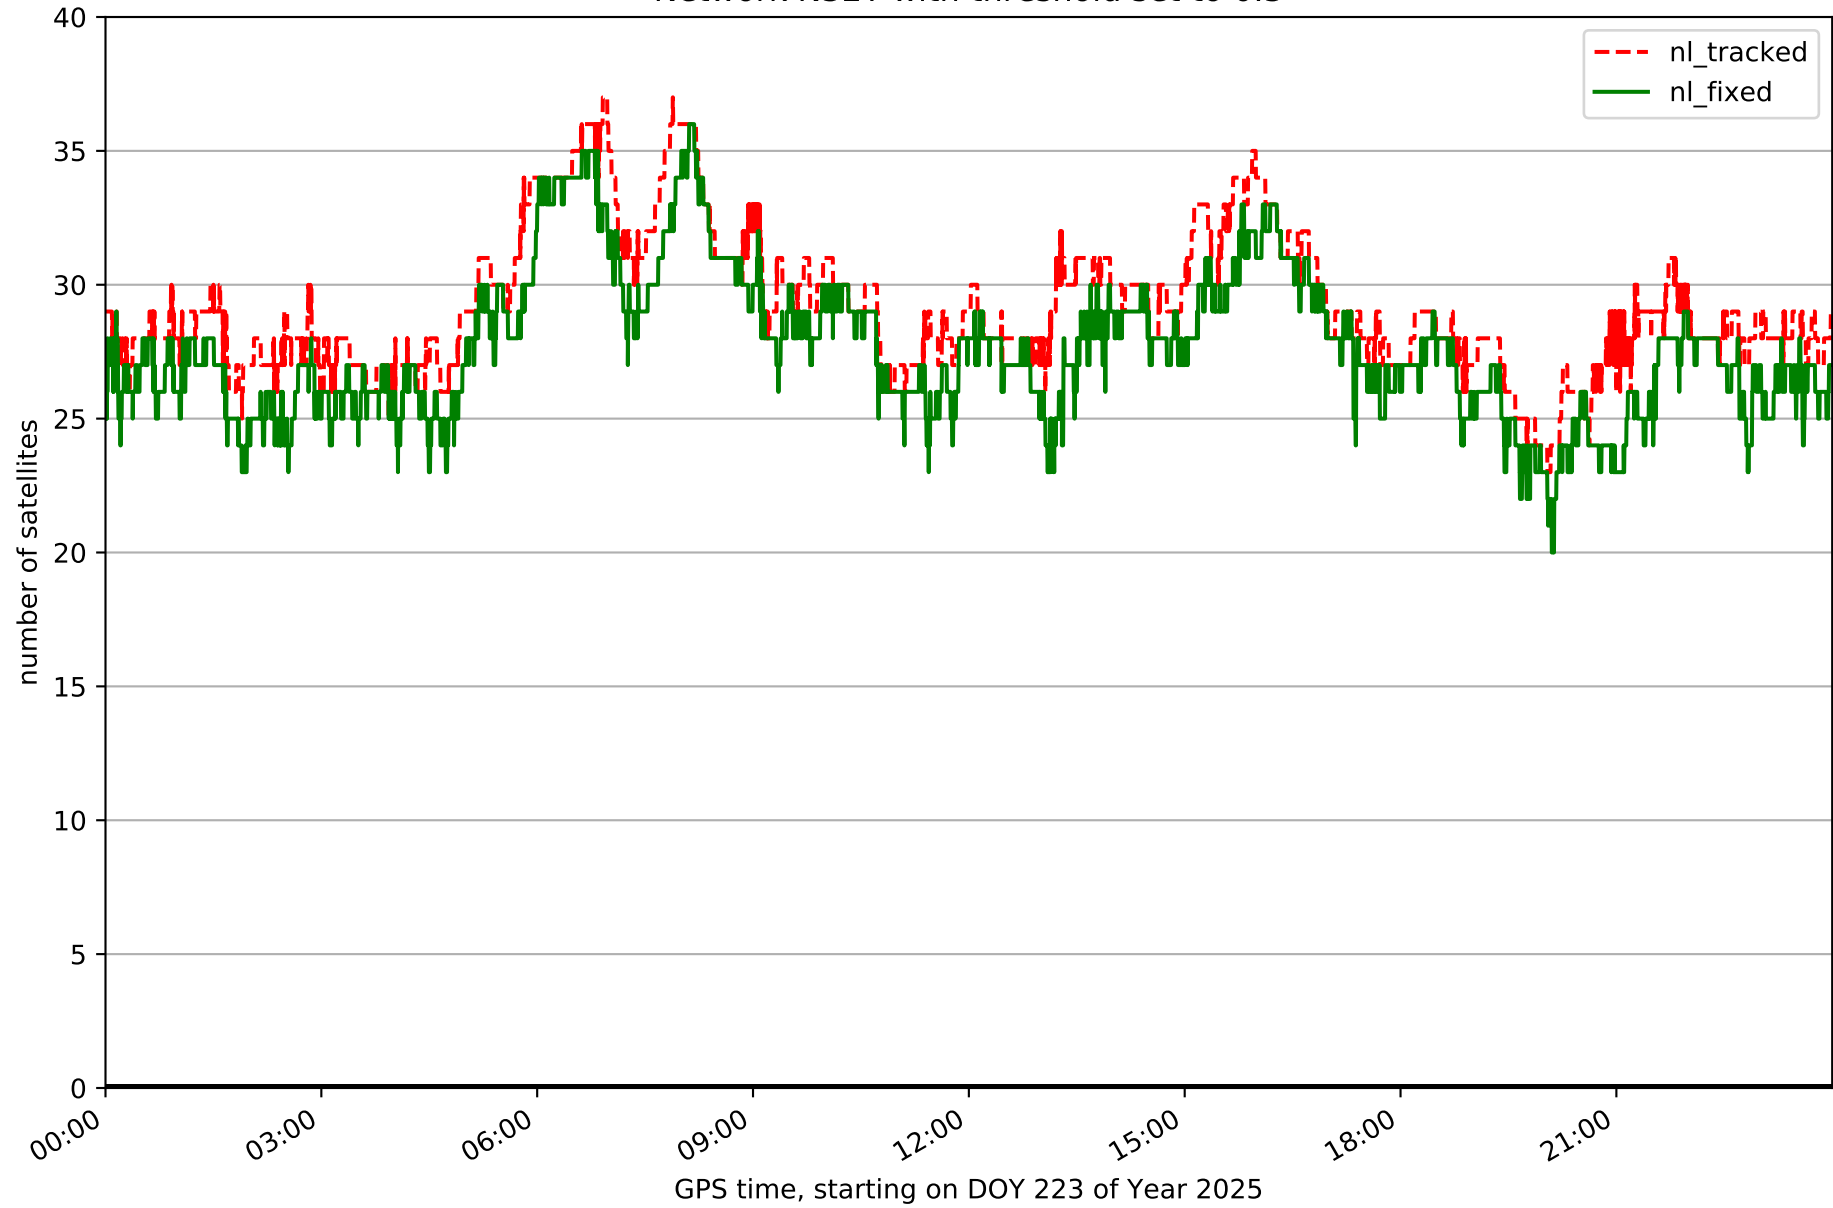


Fixing percentage of satellites in network N32T with threshold set to 0.3

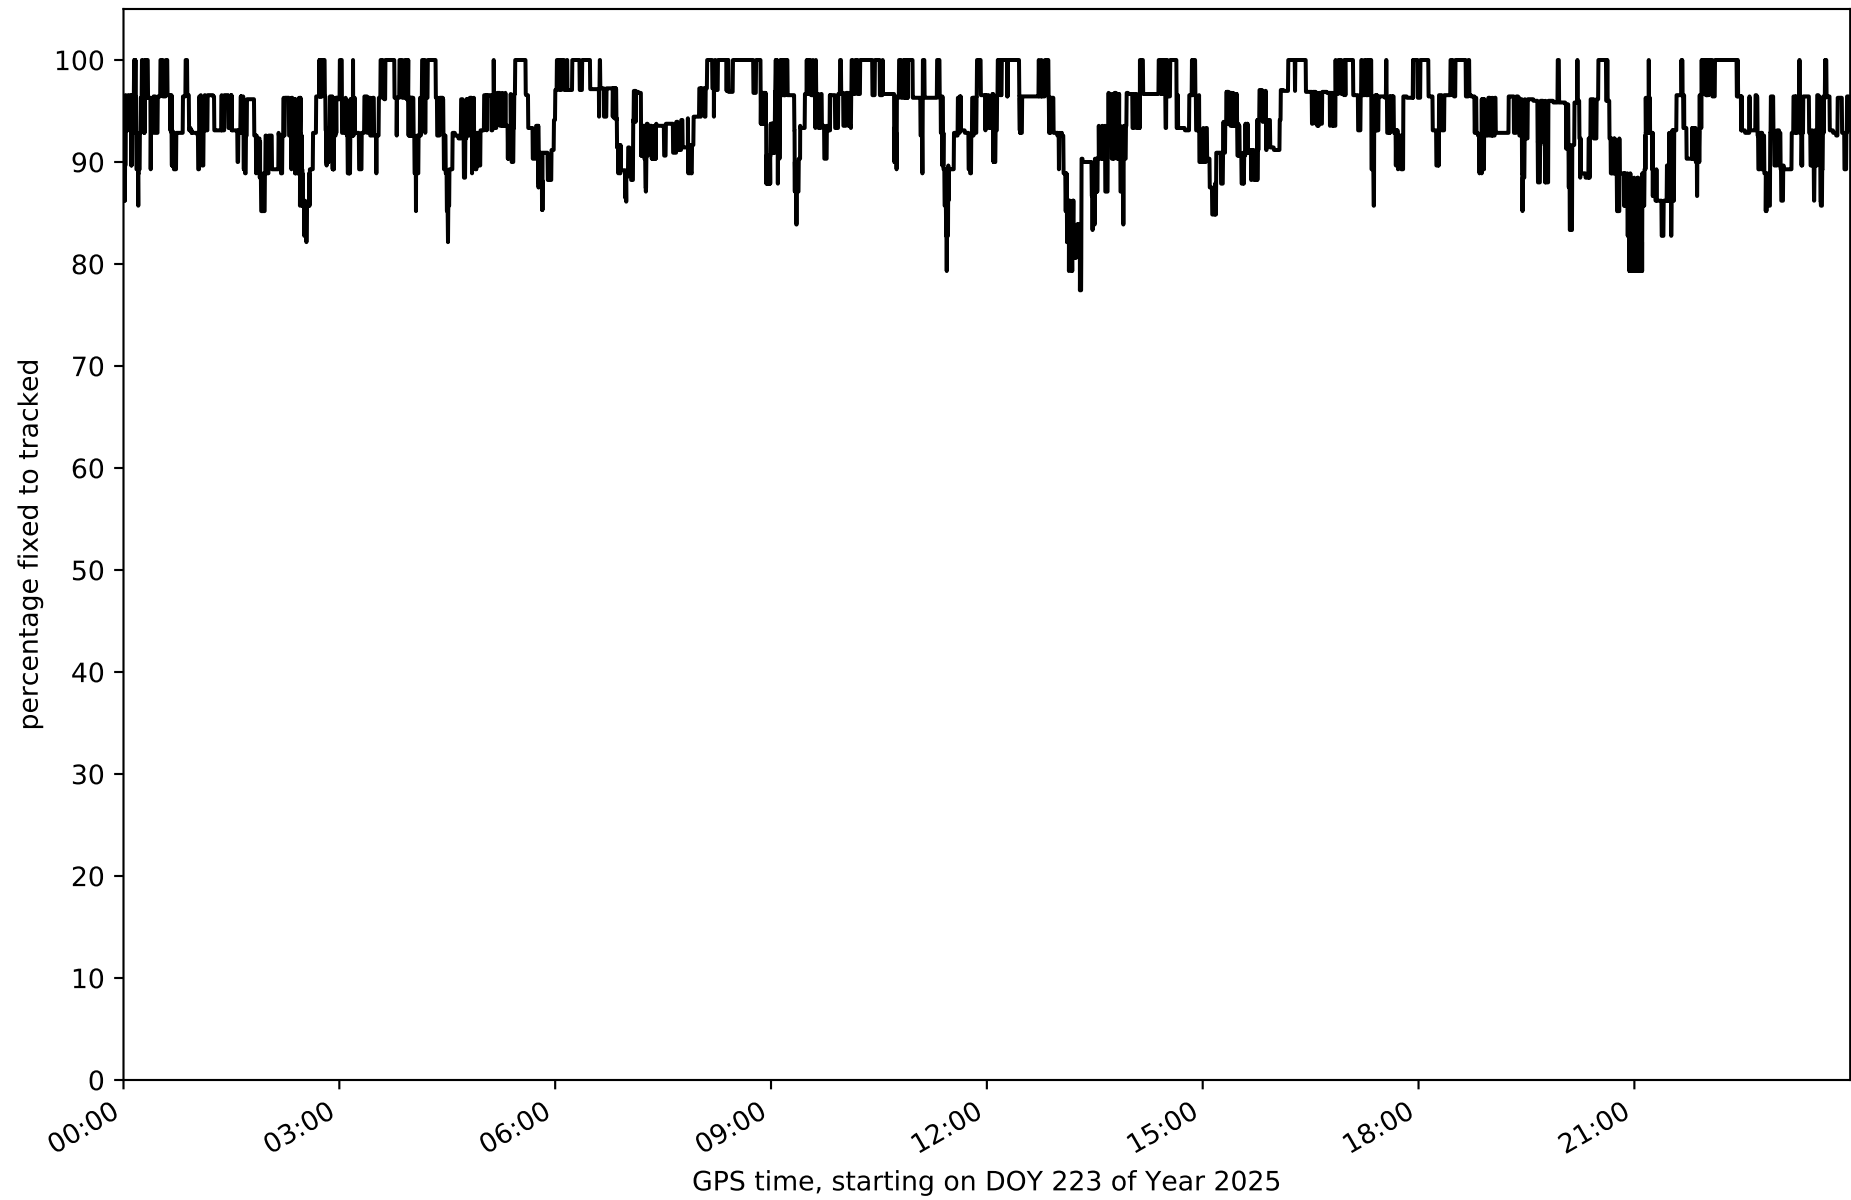


Network N32T - only GPS with threshold set to 0.3

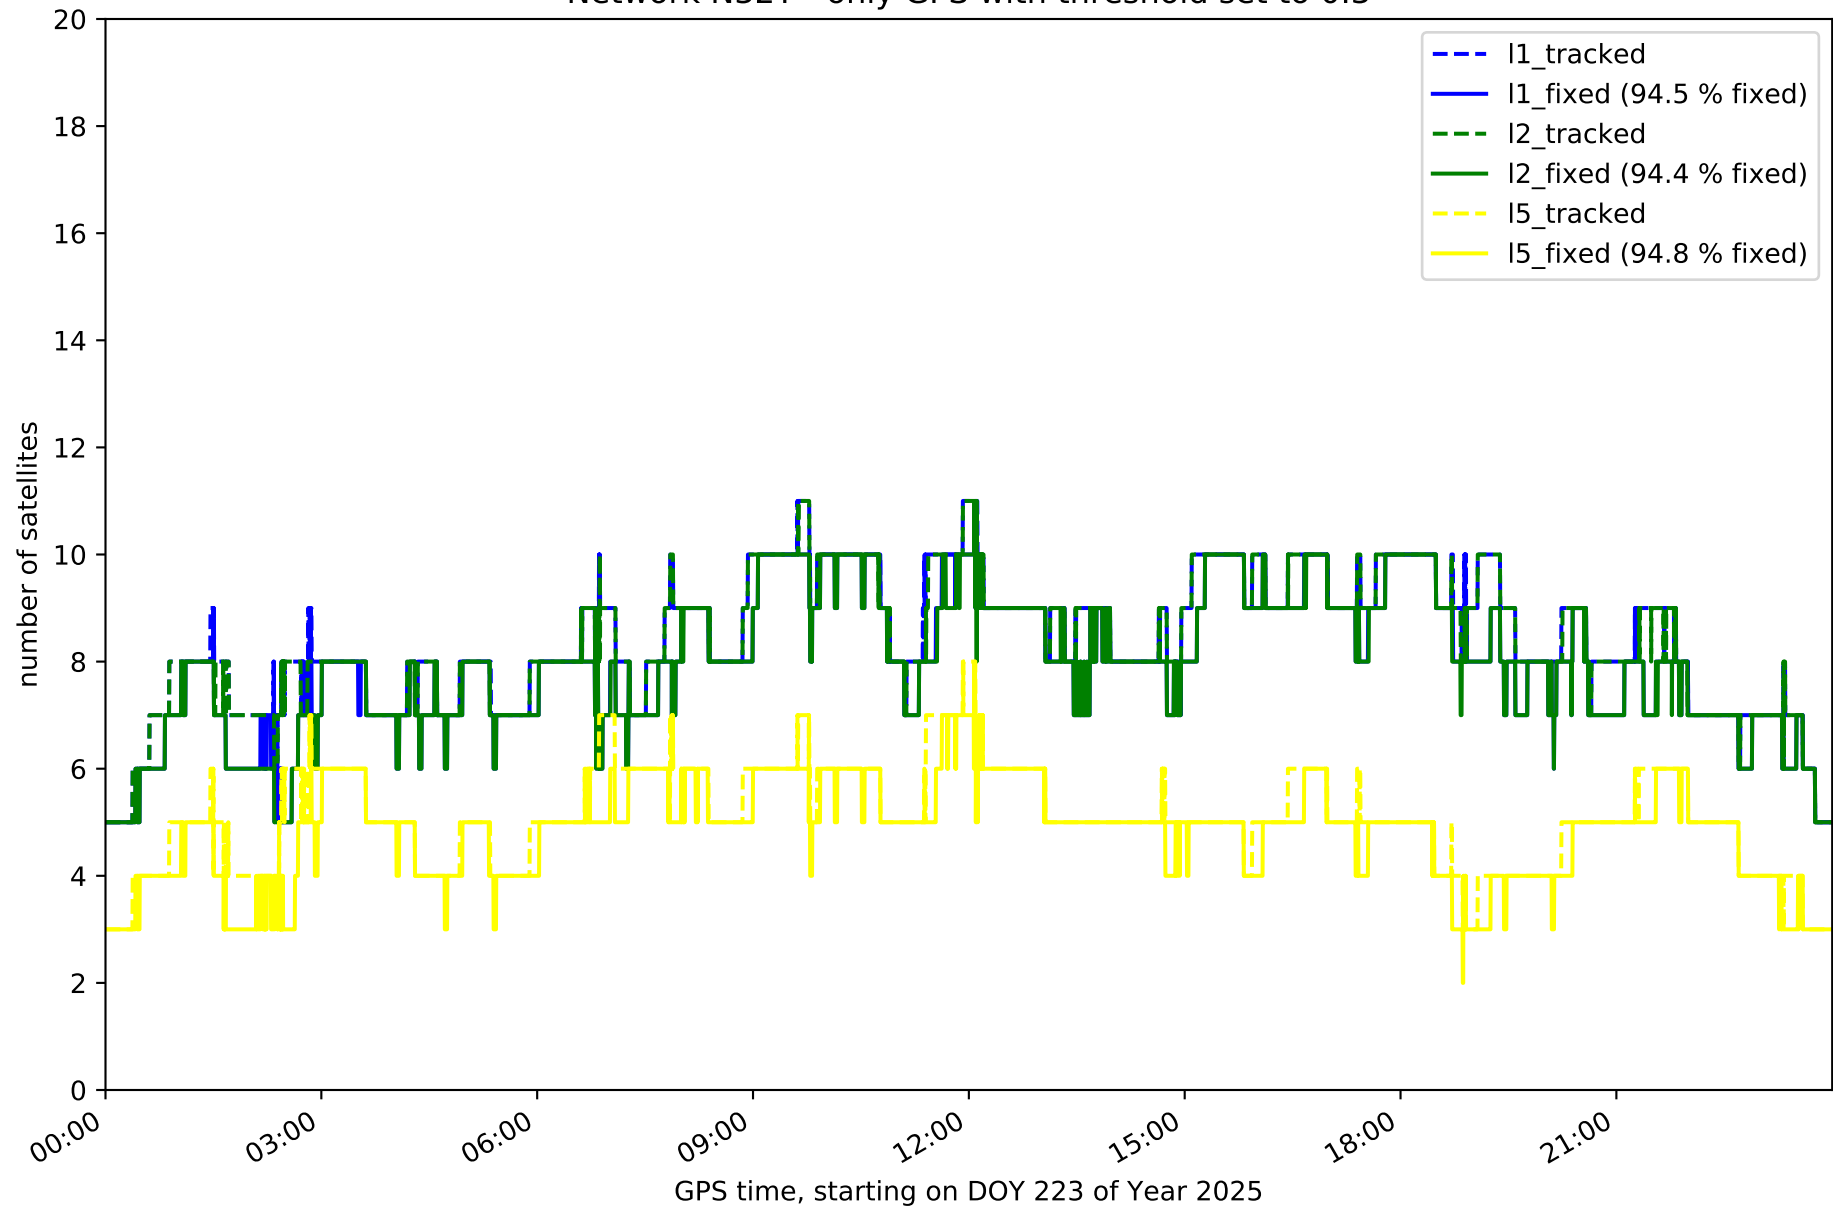


Network N32T - only GLONASS with threshold set to 0.3

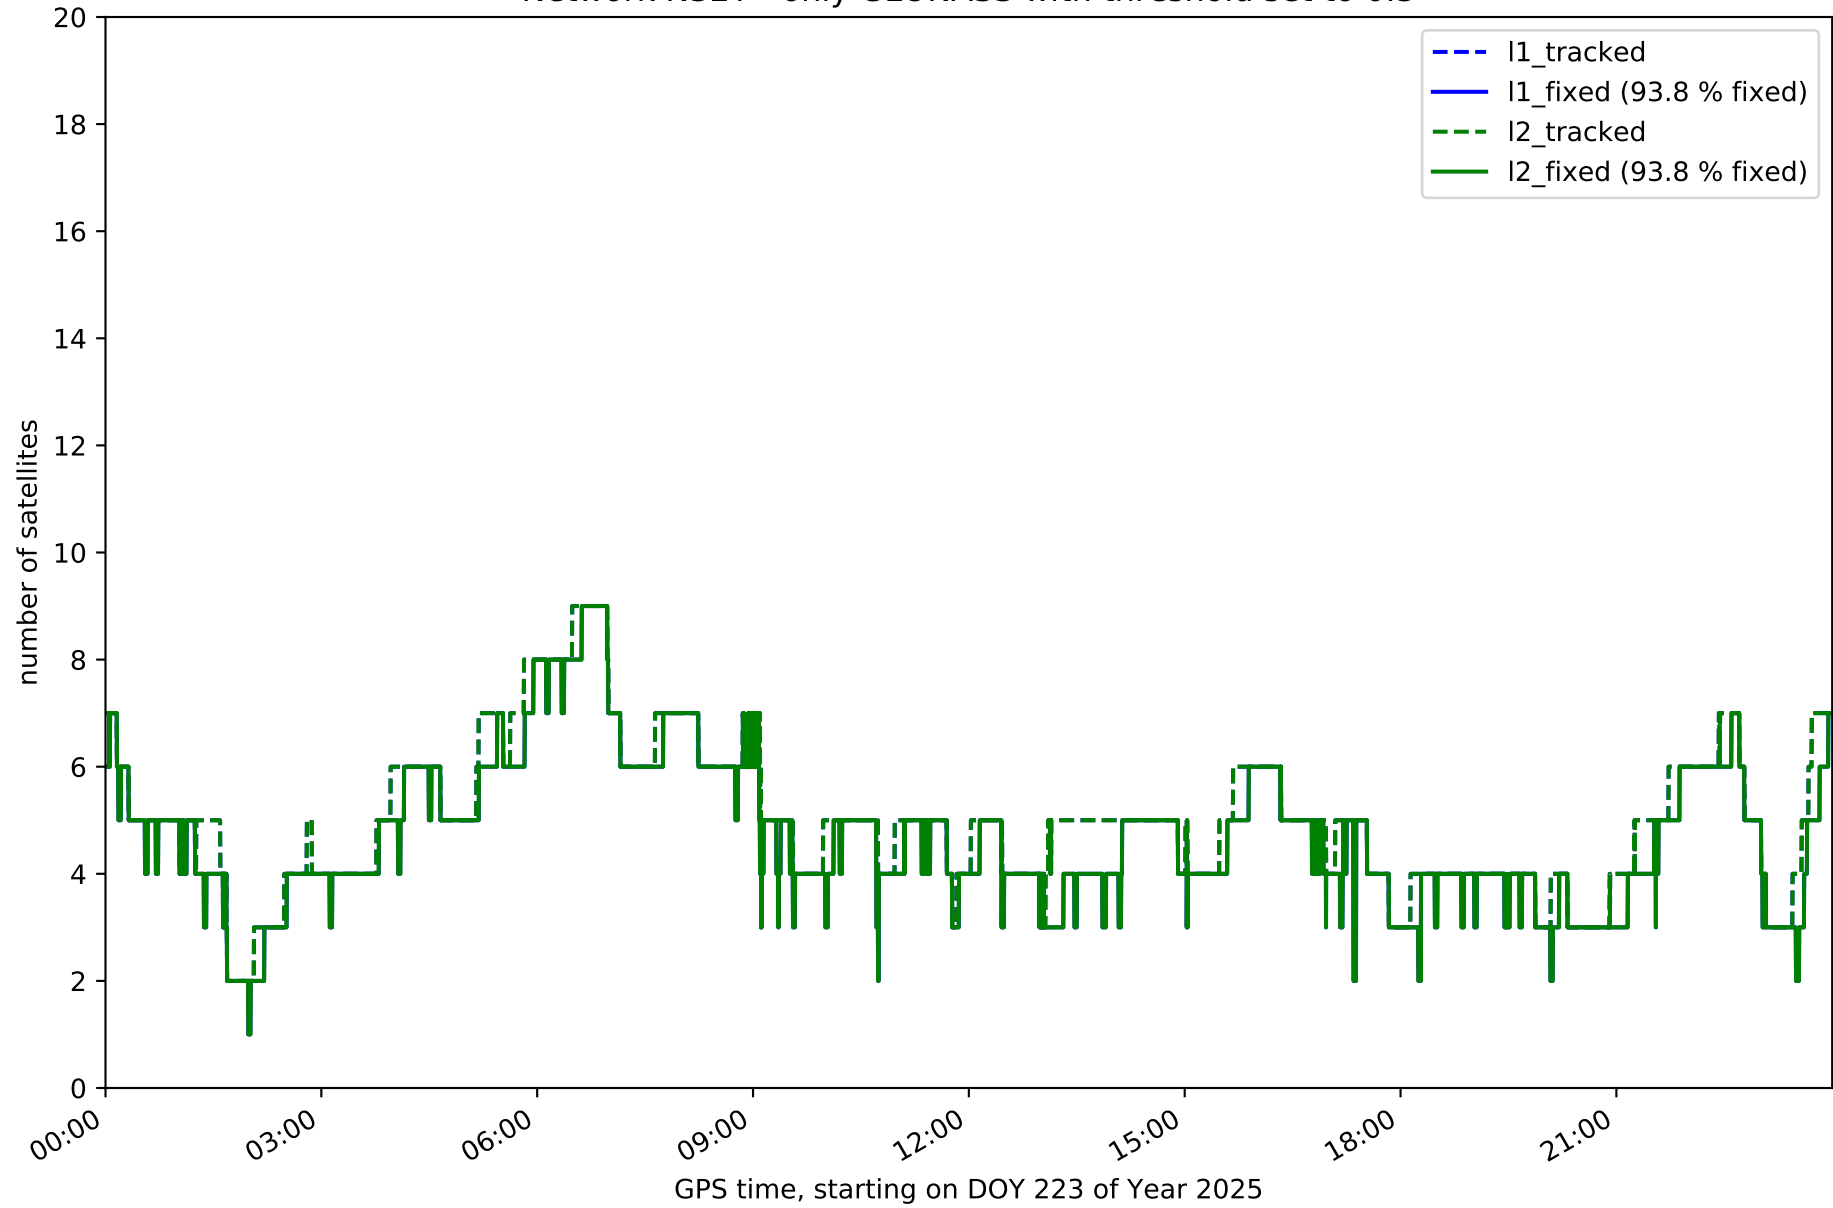


Network N32T - only BDS with threshold set to 0.3

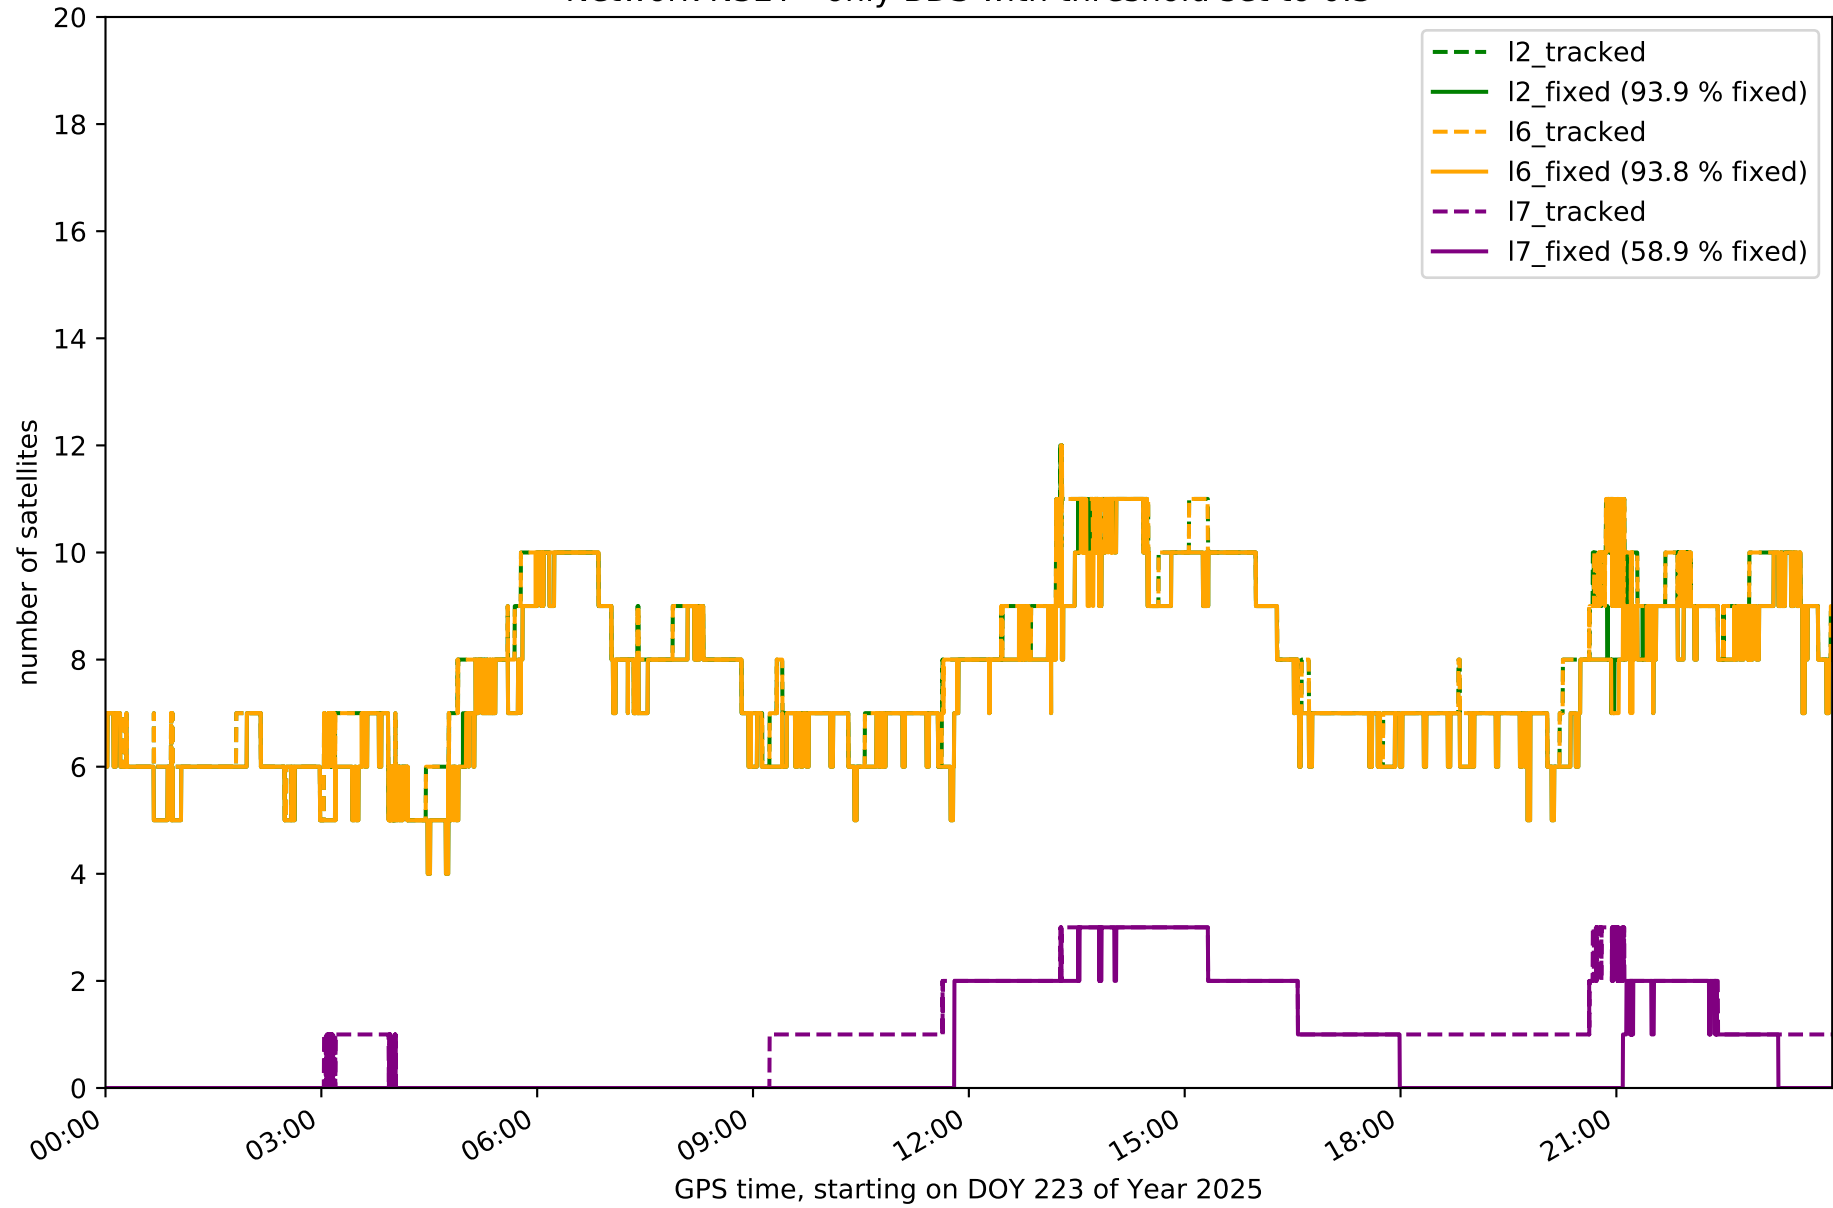


Network N32T - only Galileo with threshold set to 0.3

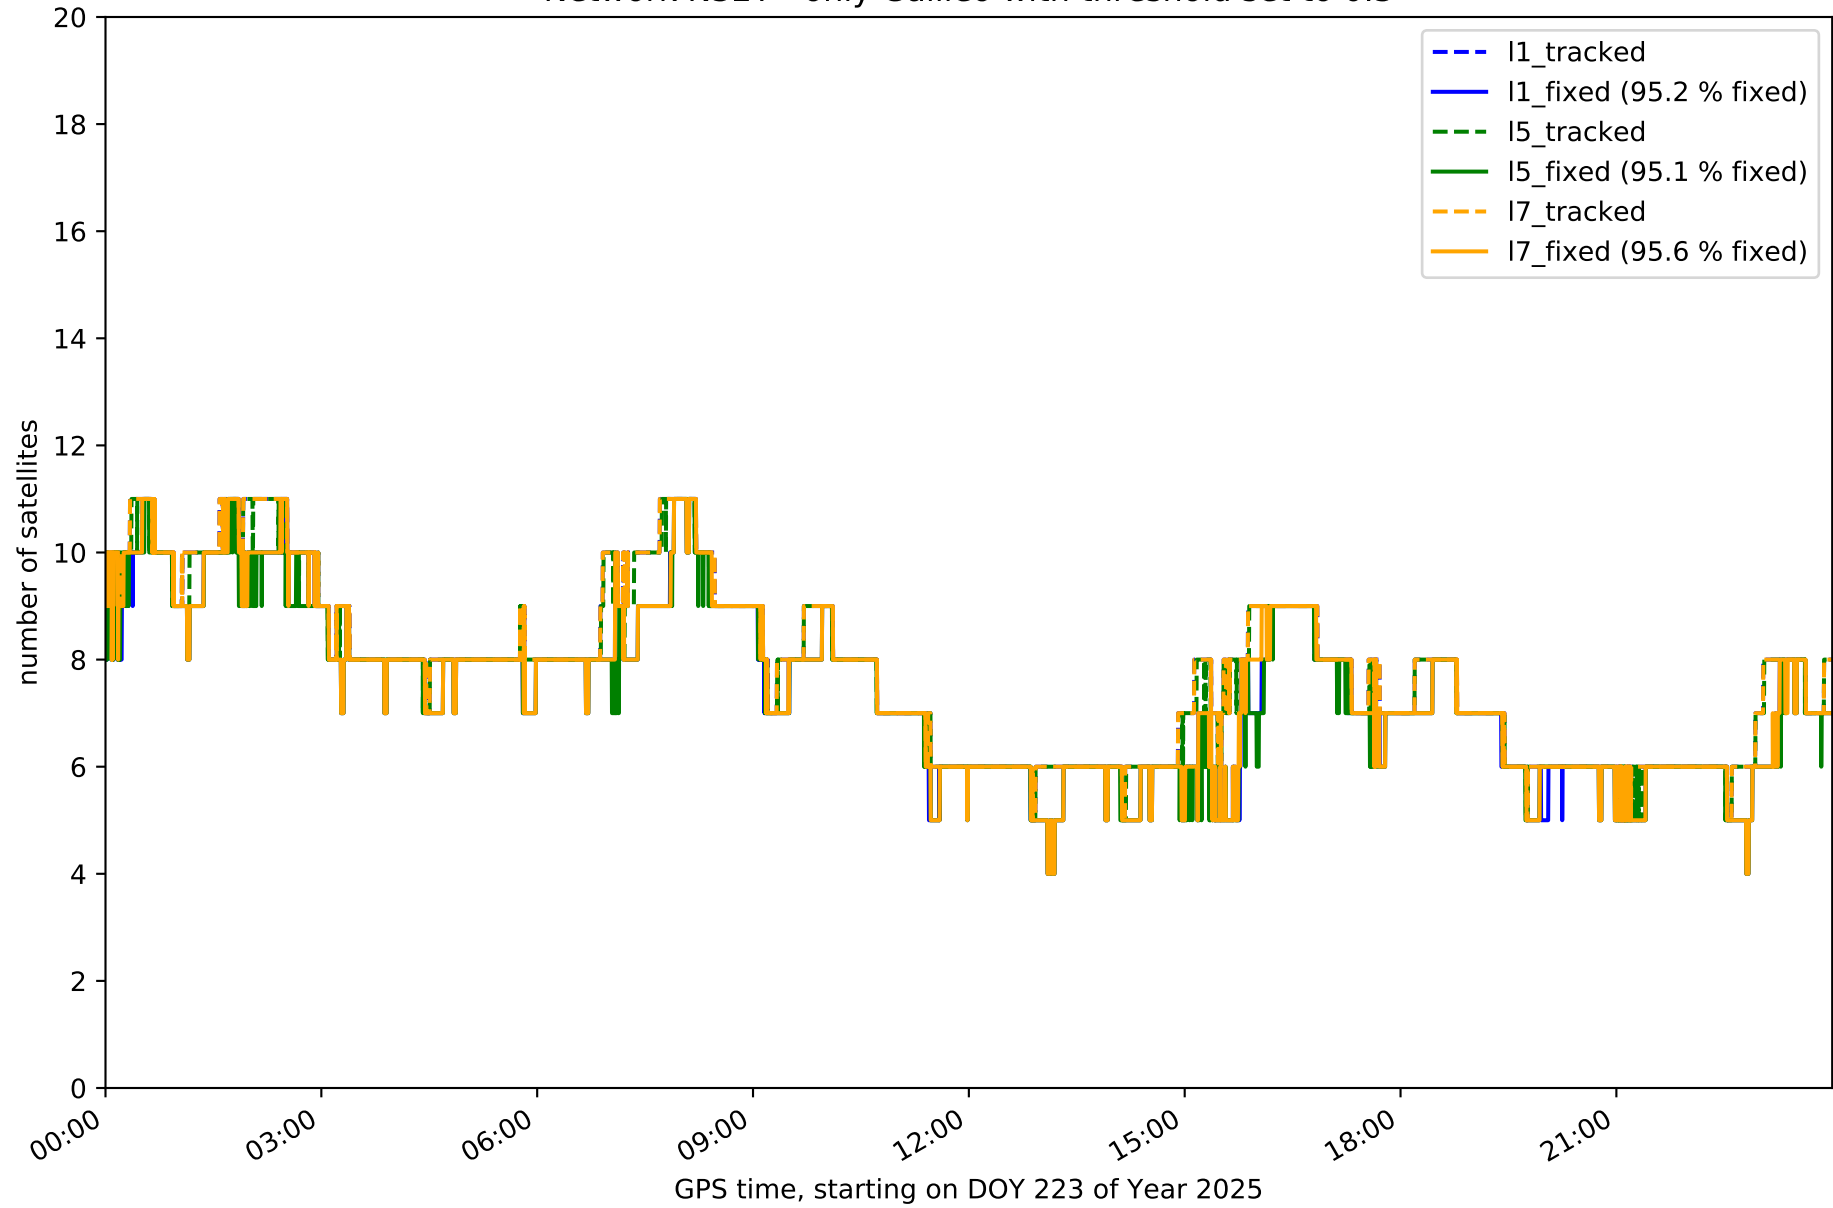


Station EH01 in network N32T

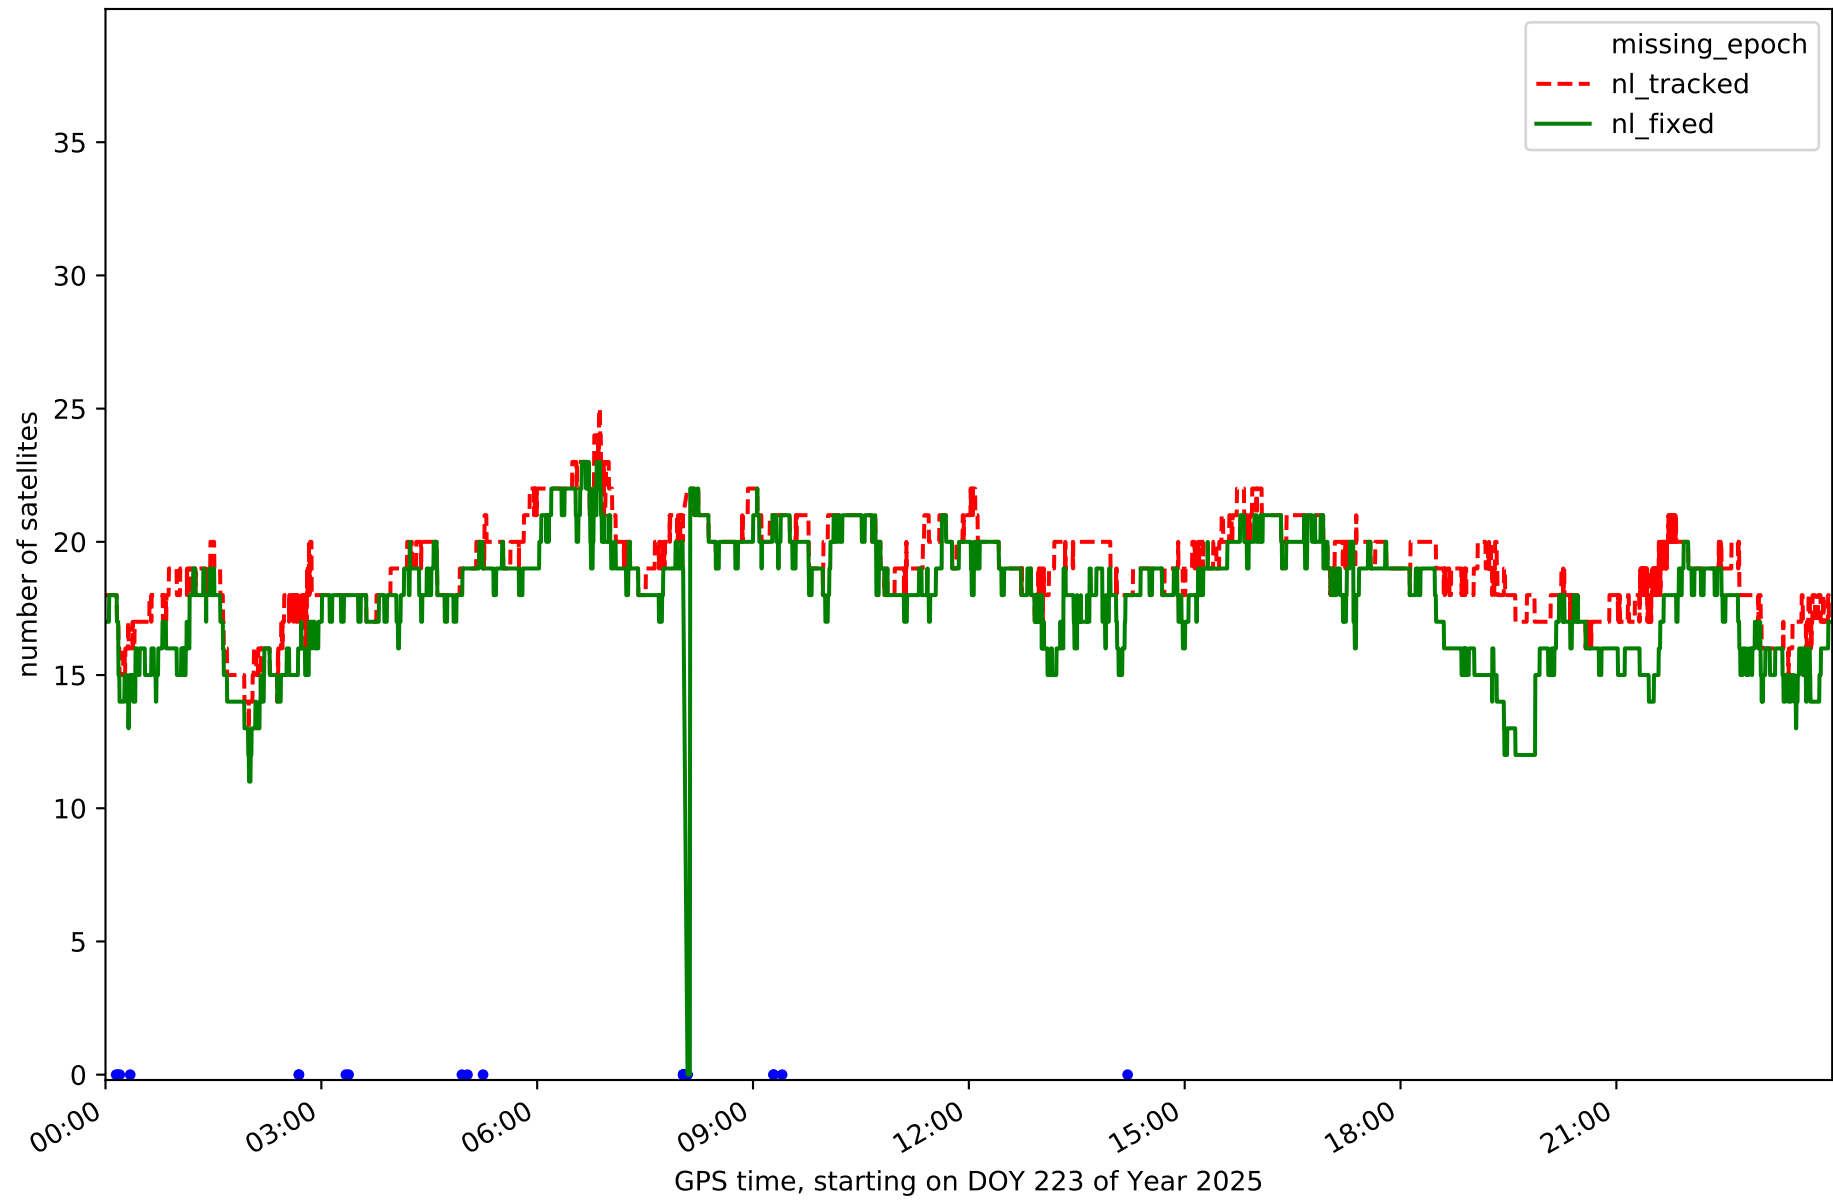


Station EH02 in network N32T

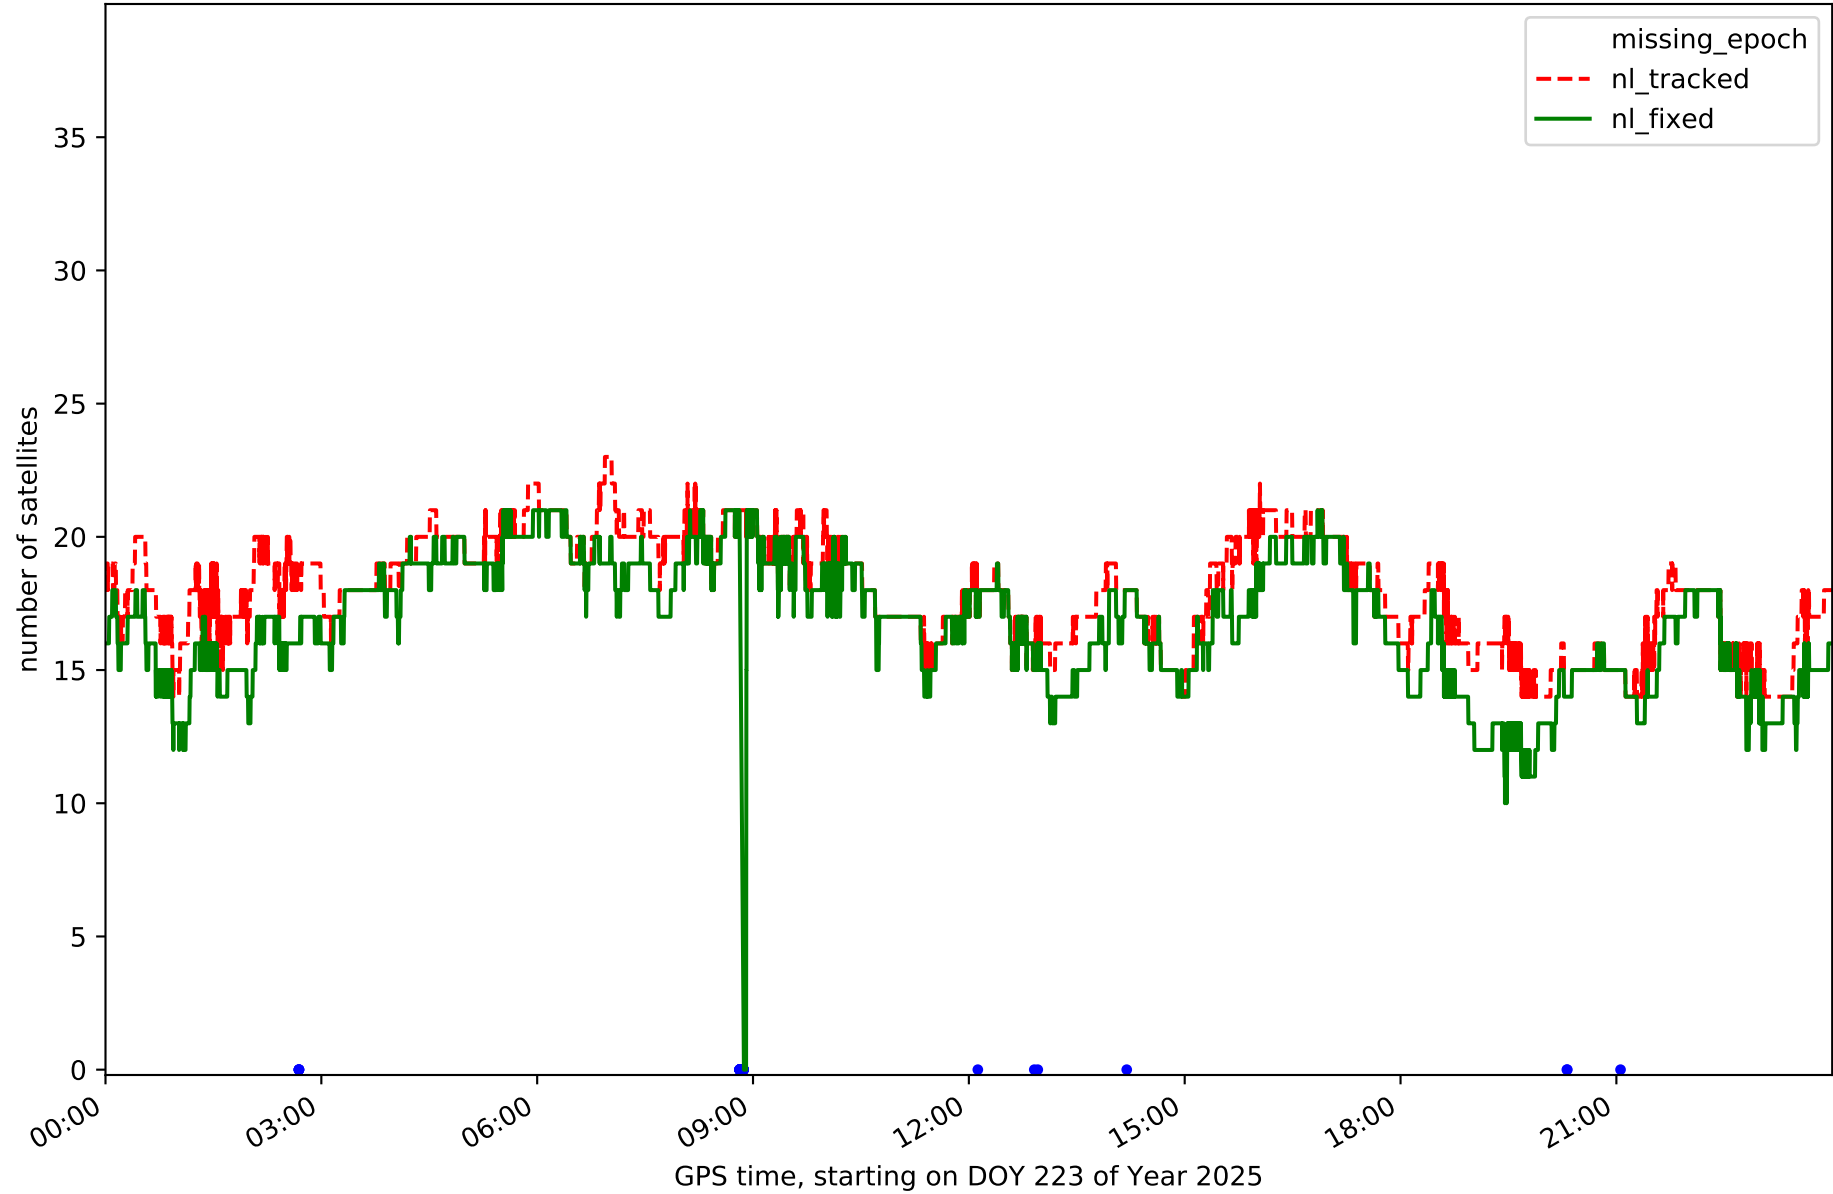


Station GOM1 in network N32T

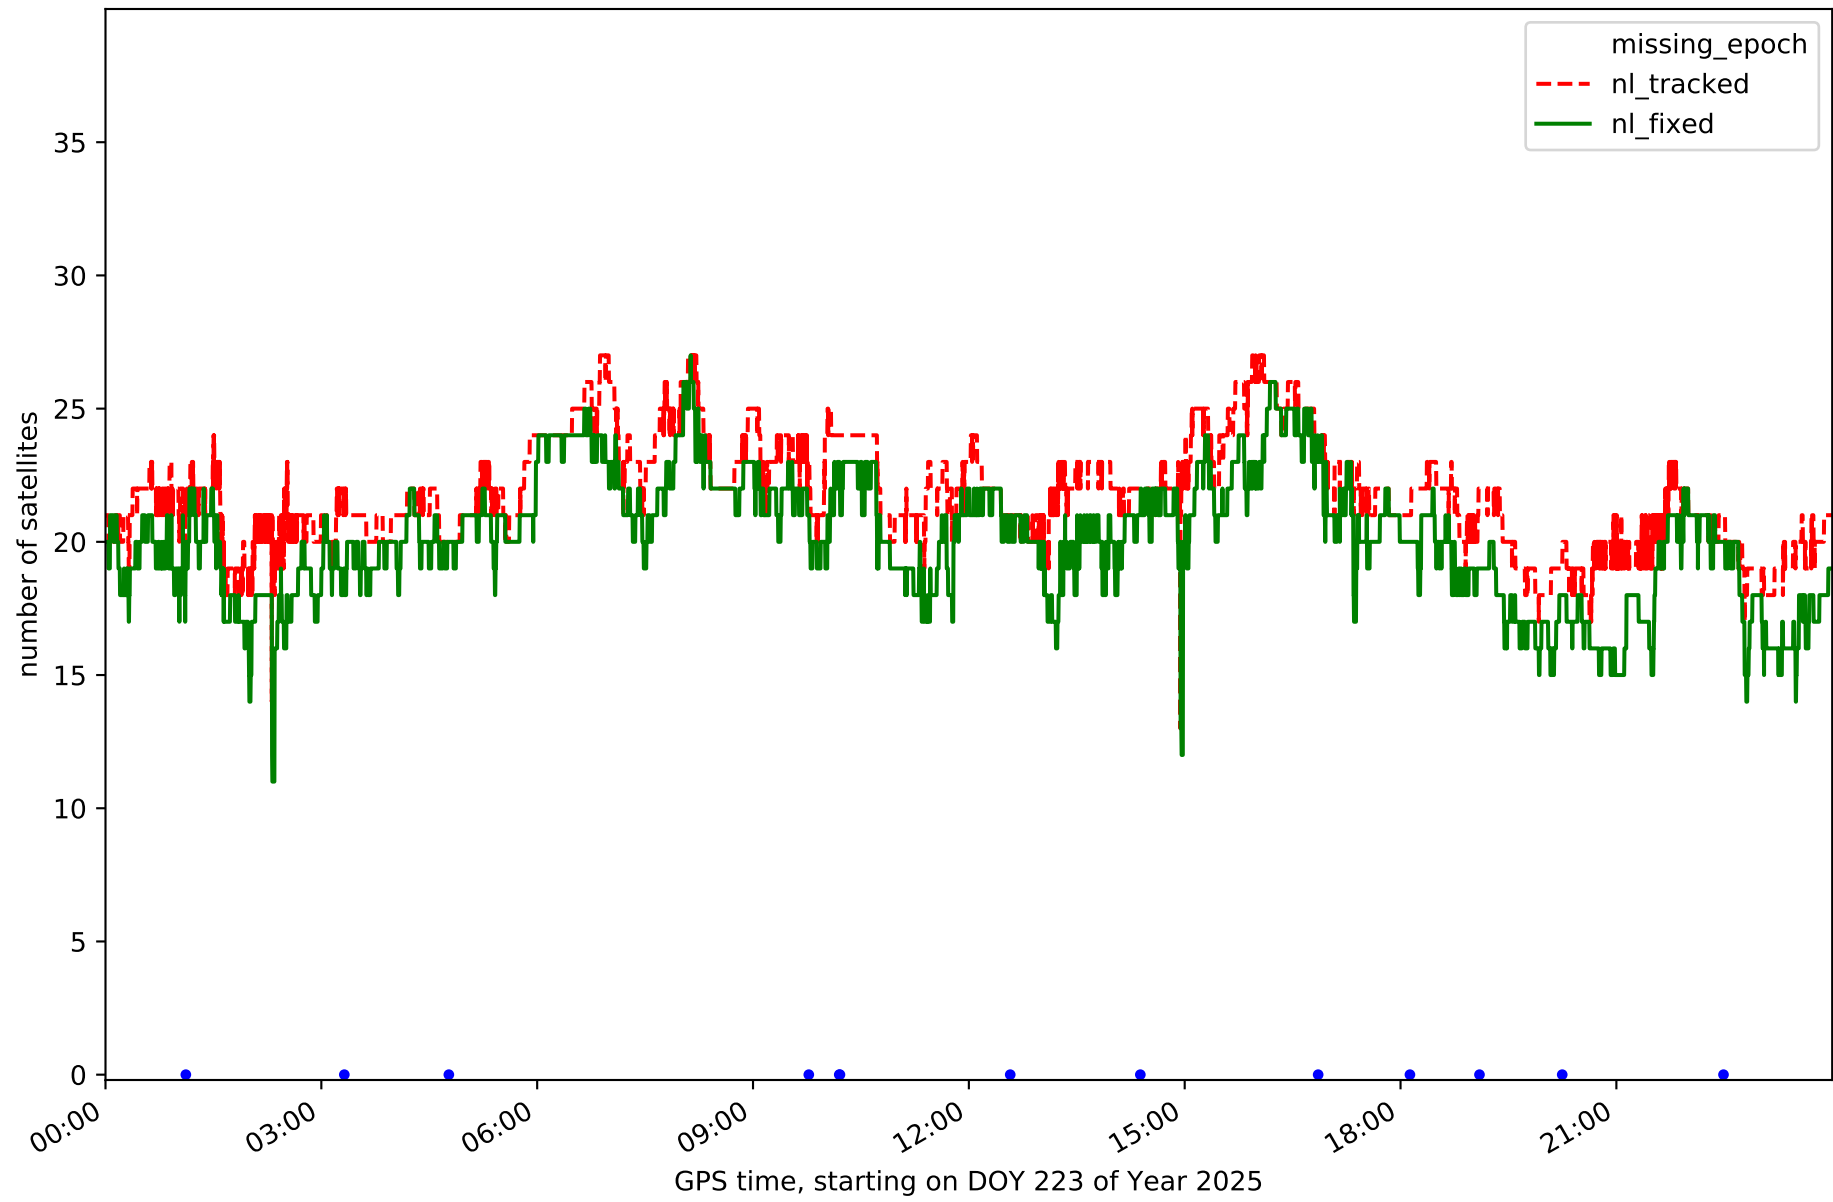


Station IZAN in network N32T

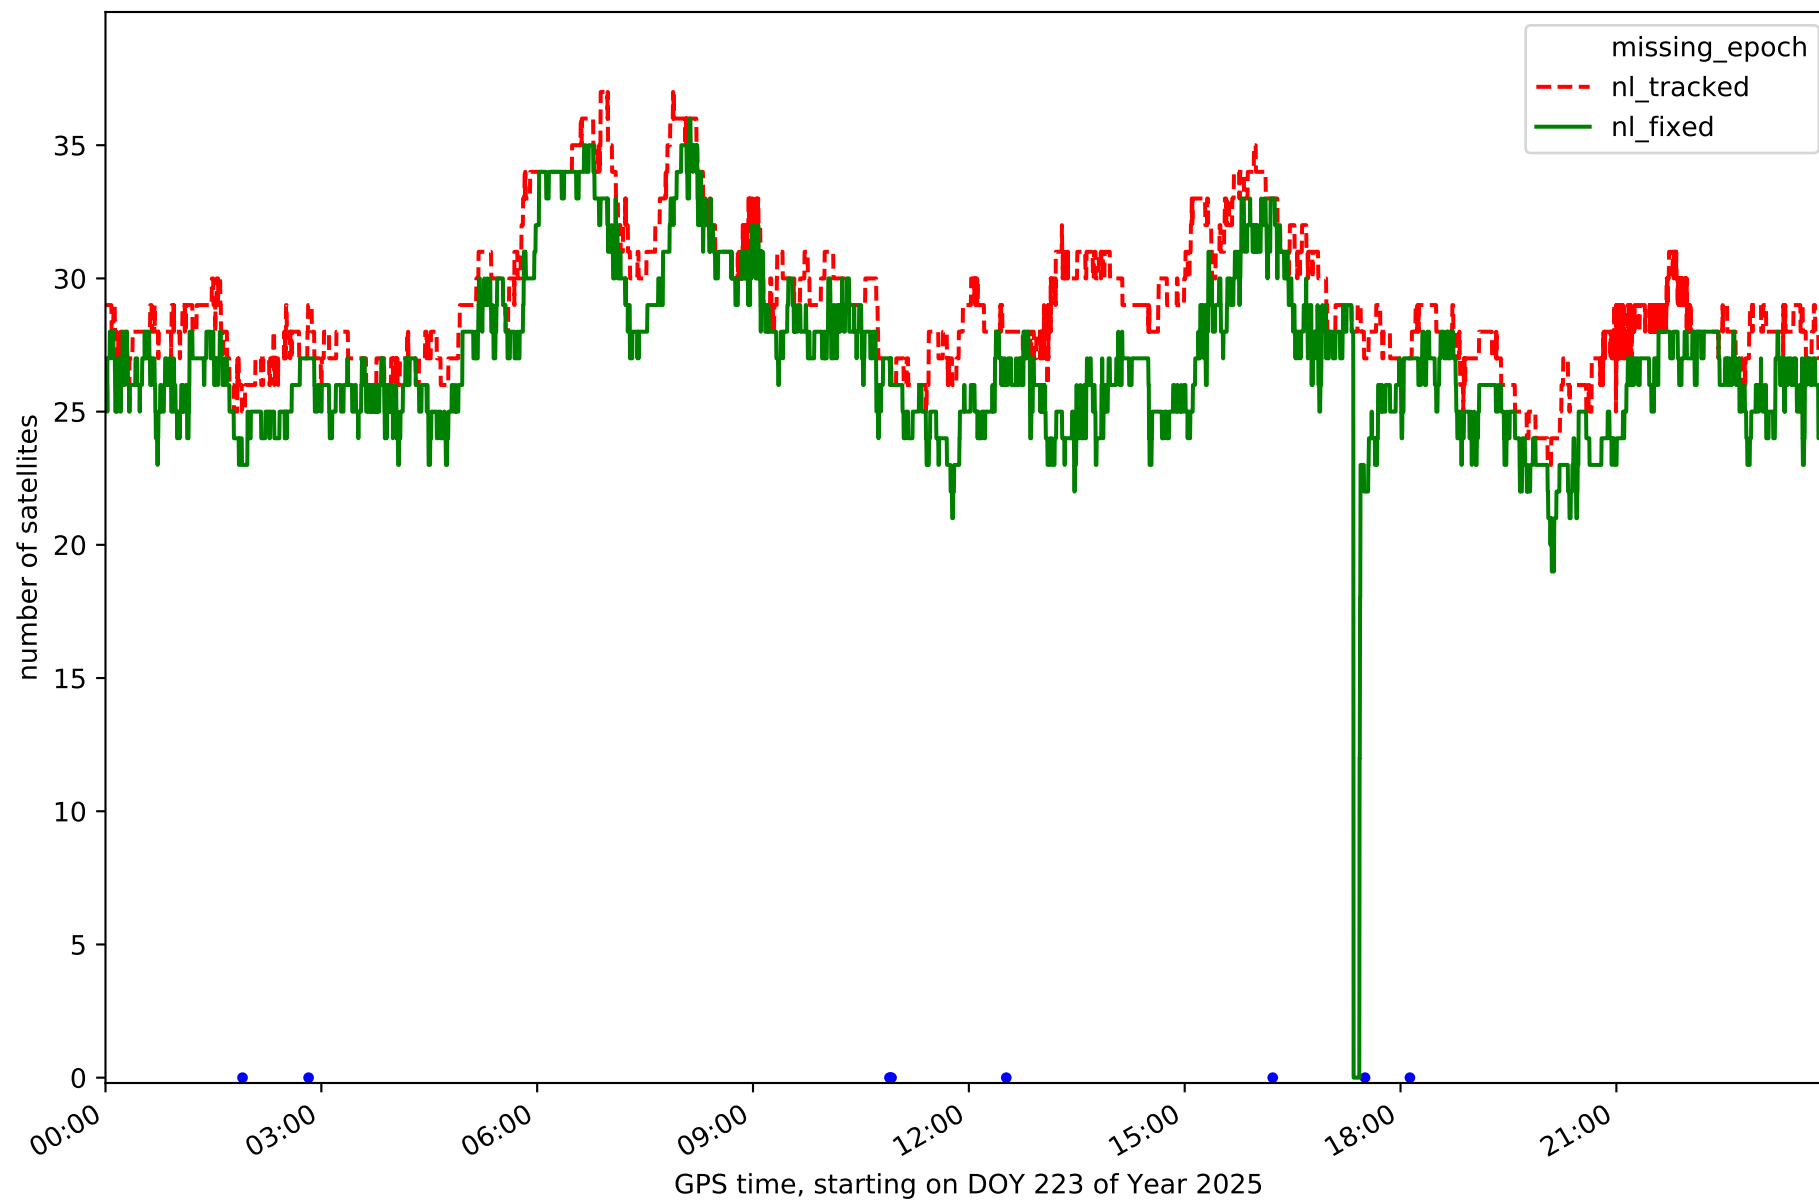


Station LP01 in network N32T

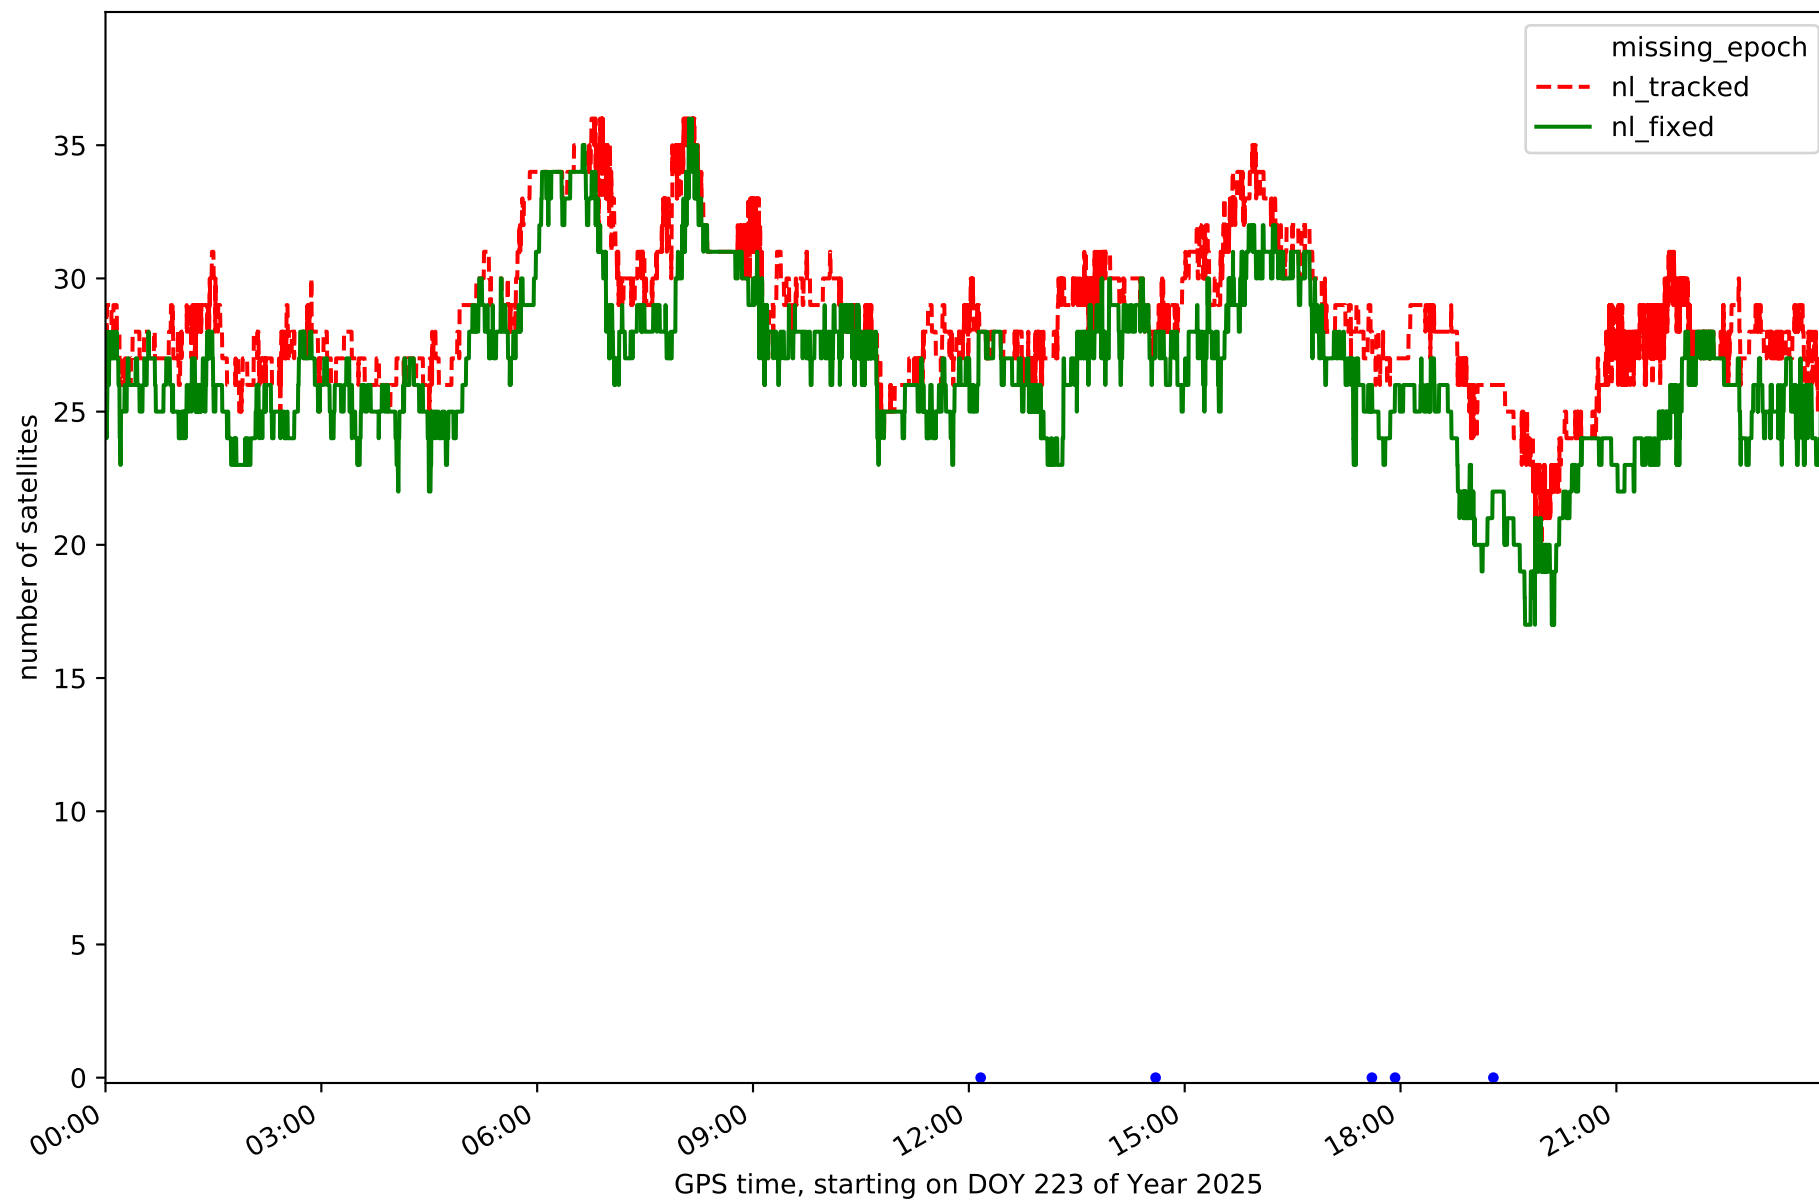


Station LP03 in network N32T

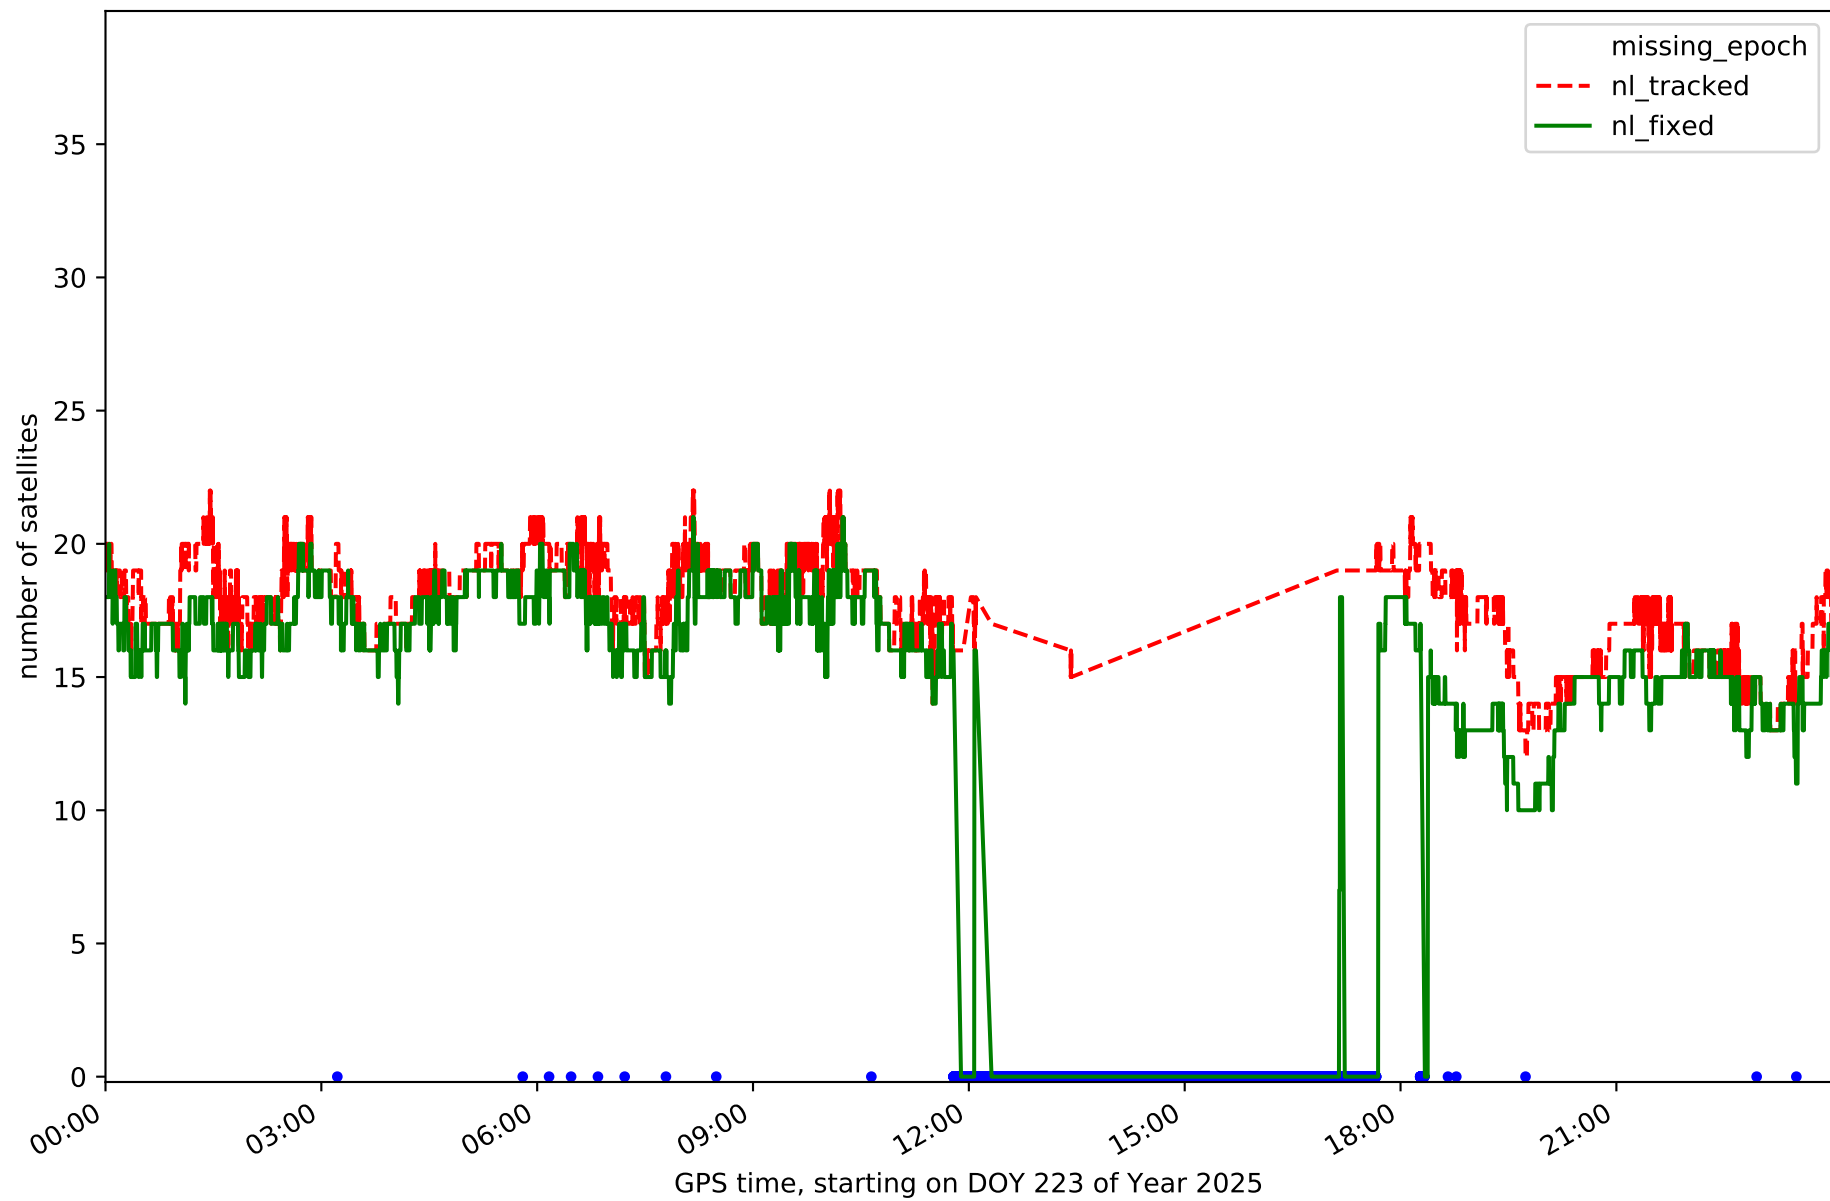


Station LPAL in network N32T

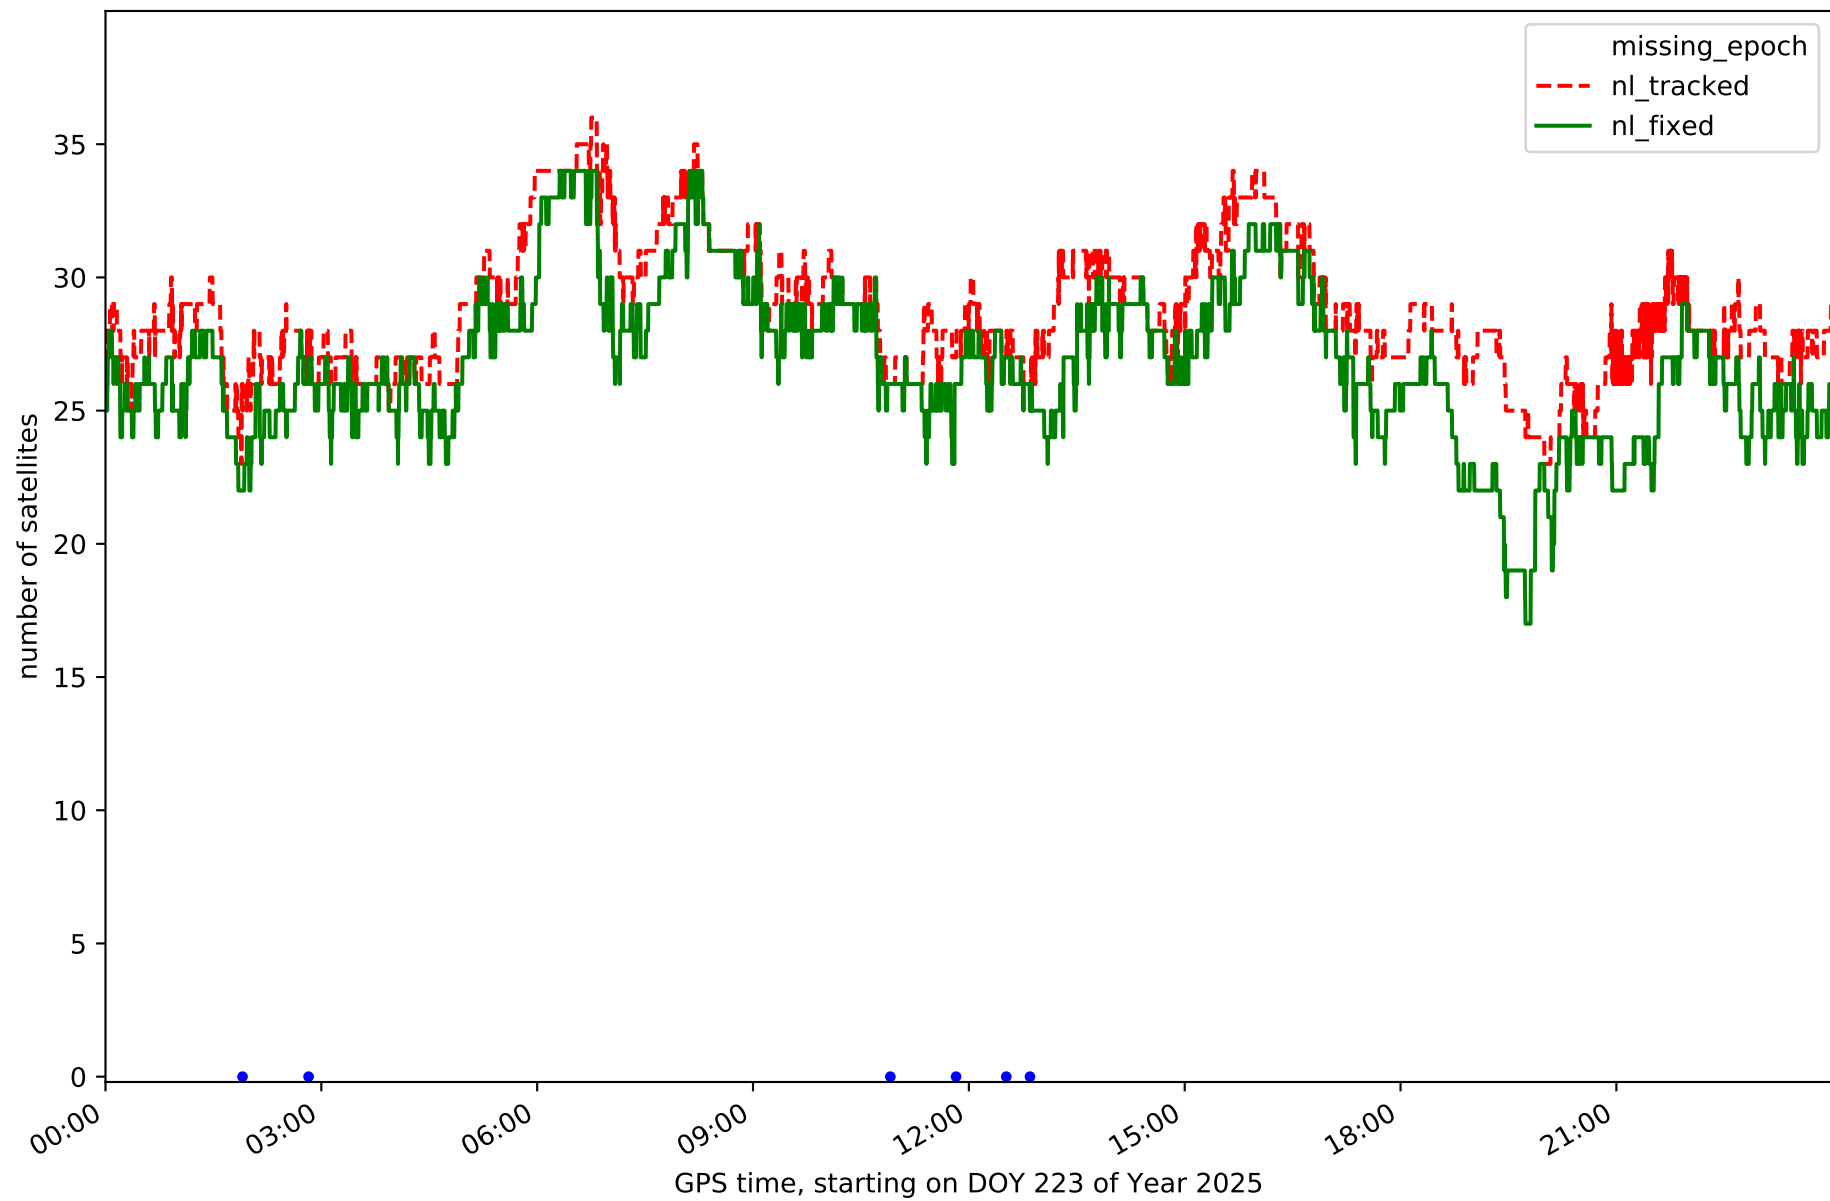


Station LRES in network N32T

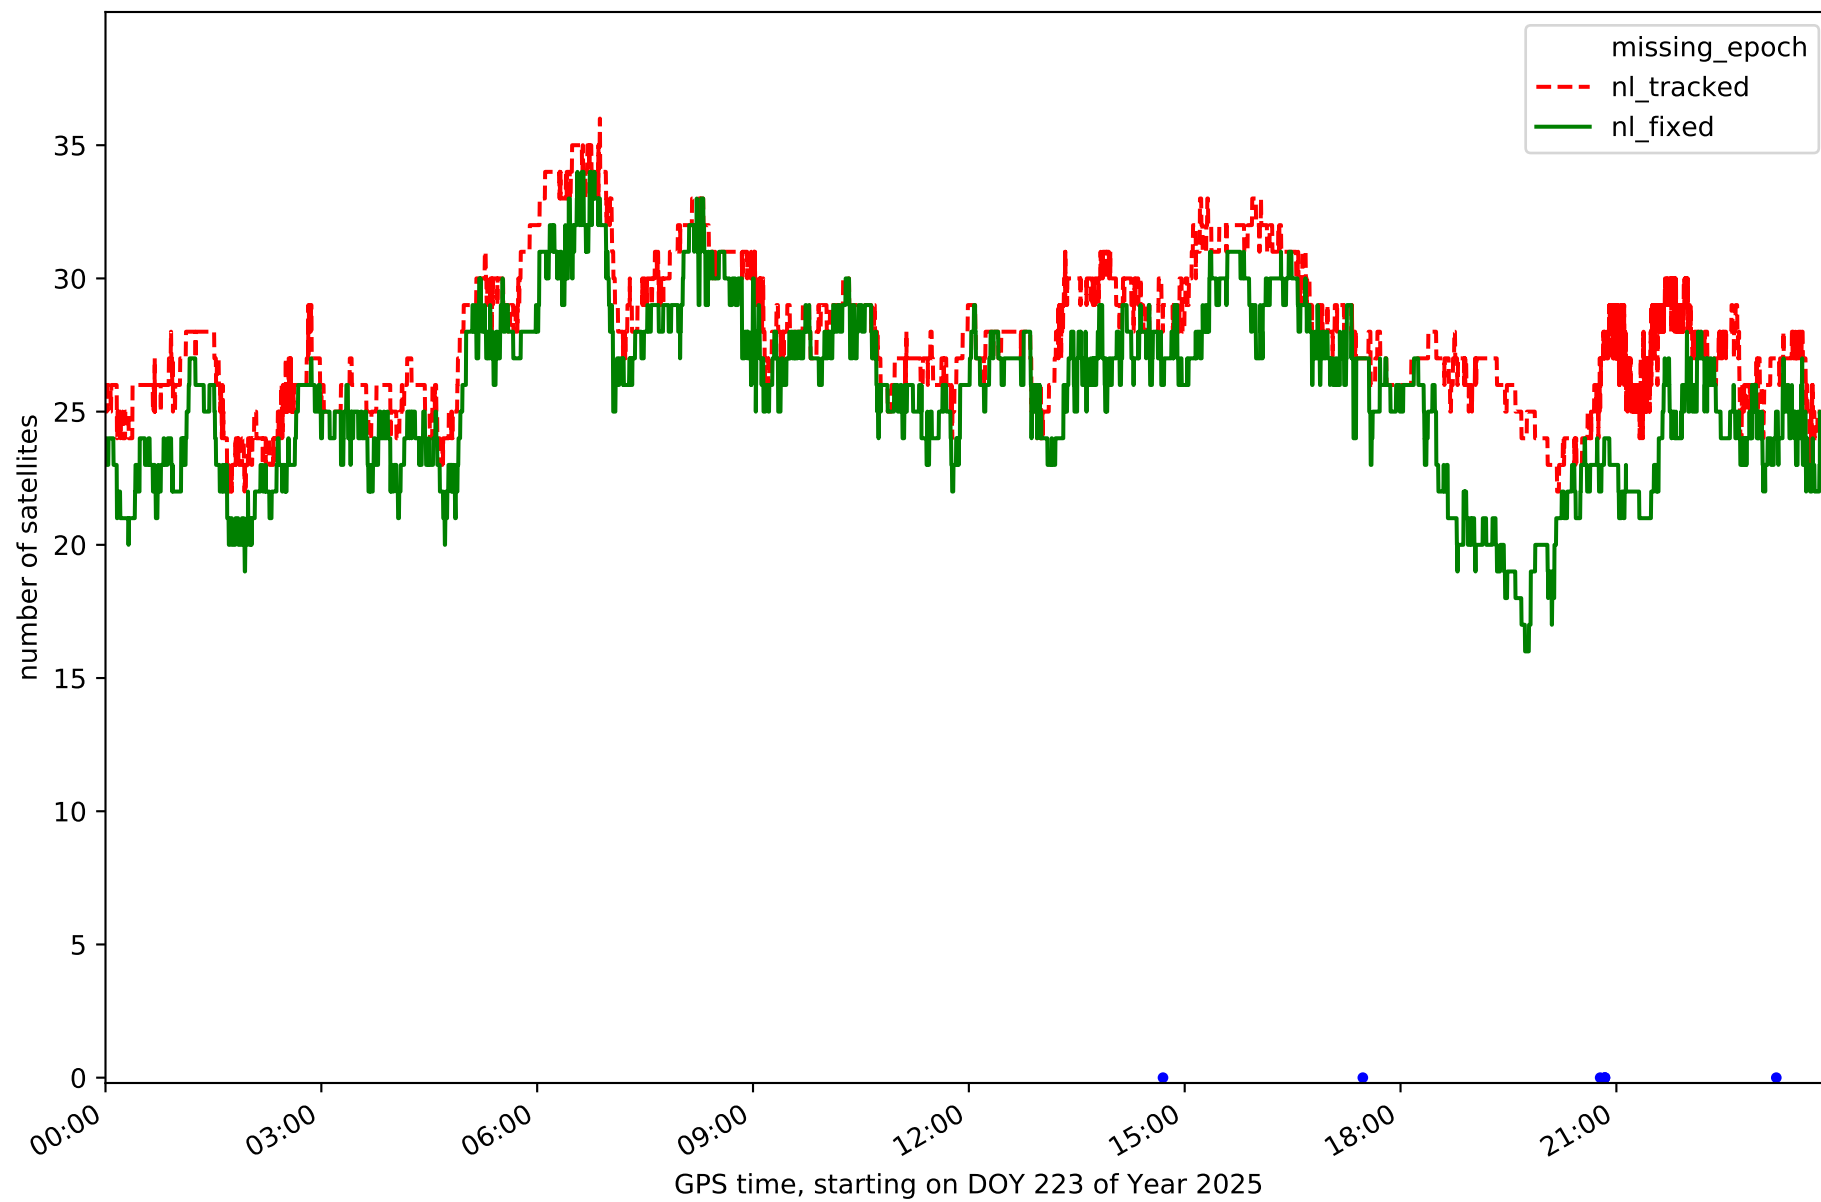


Station TN01 in network N32T

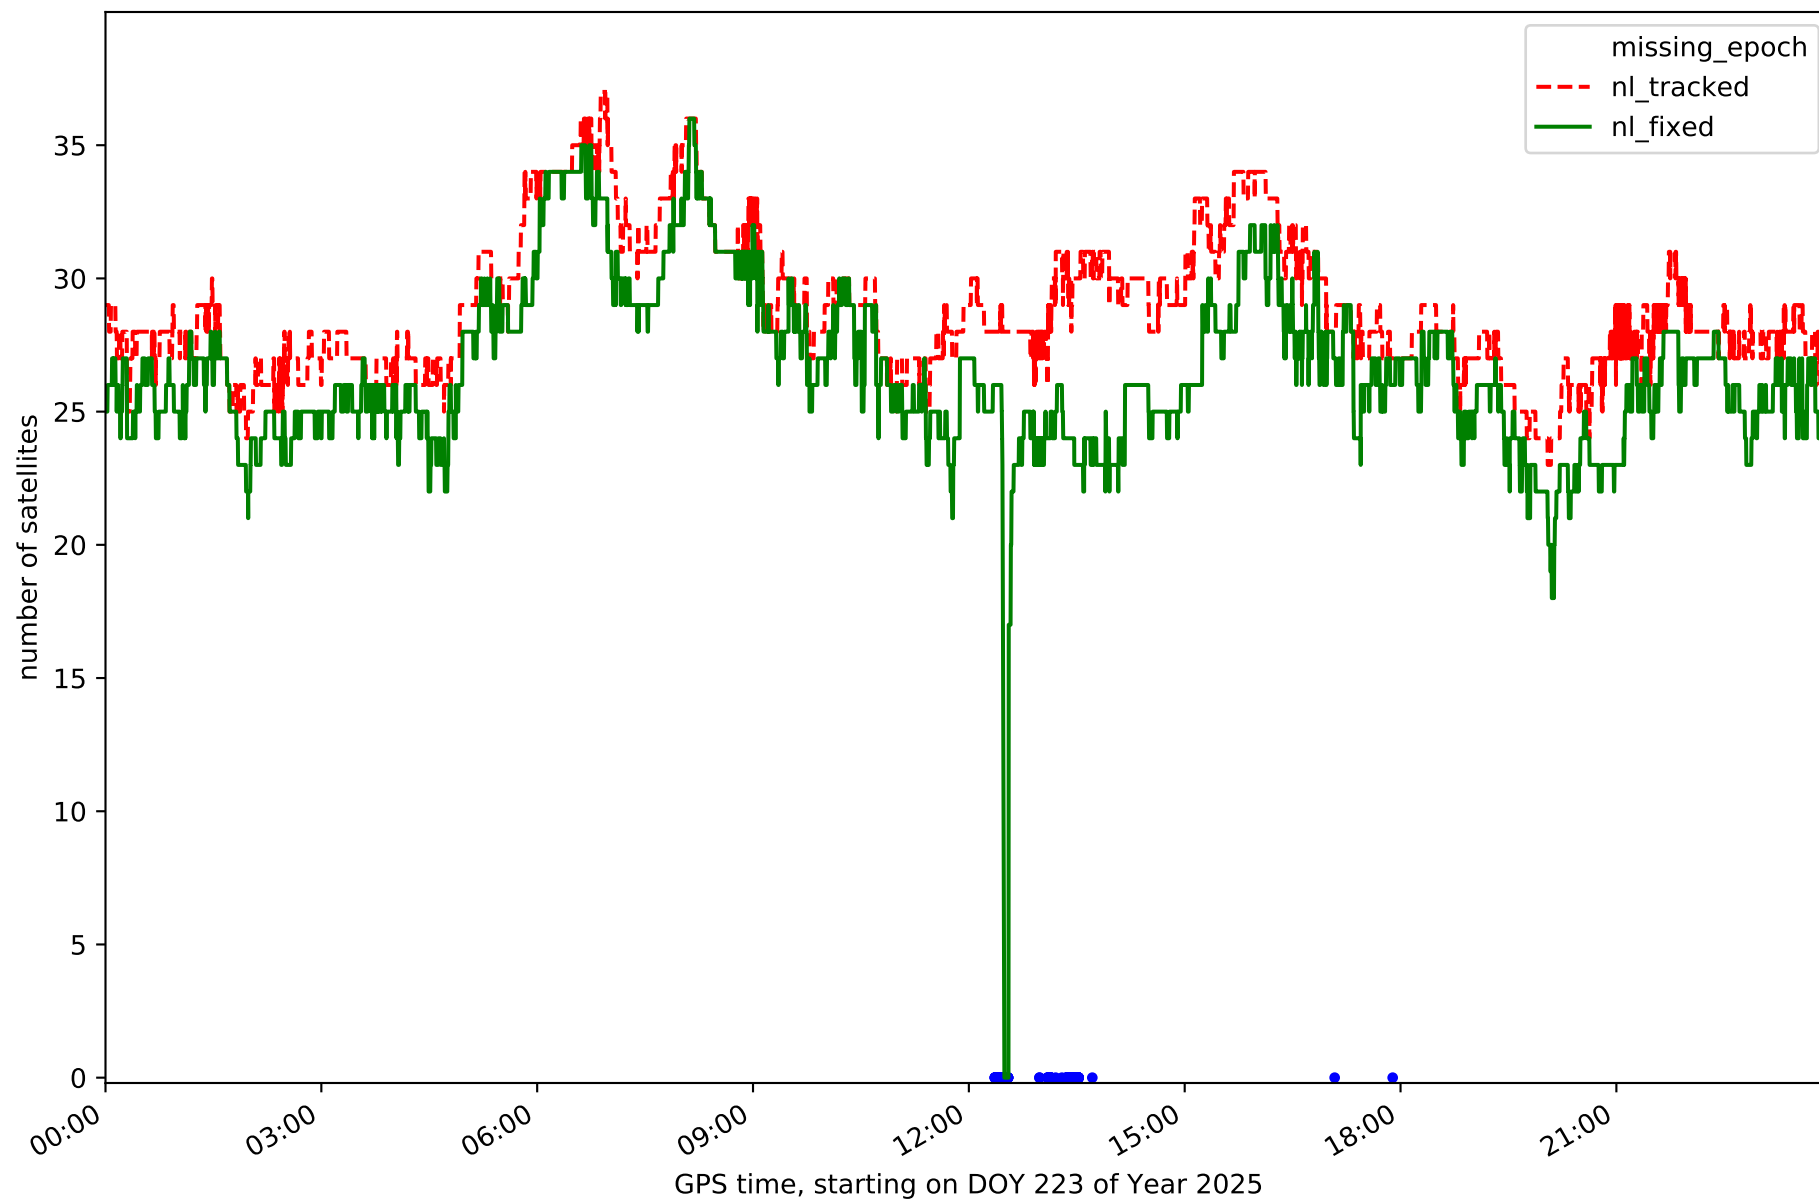


Station TN02 in network N32T

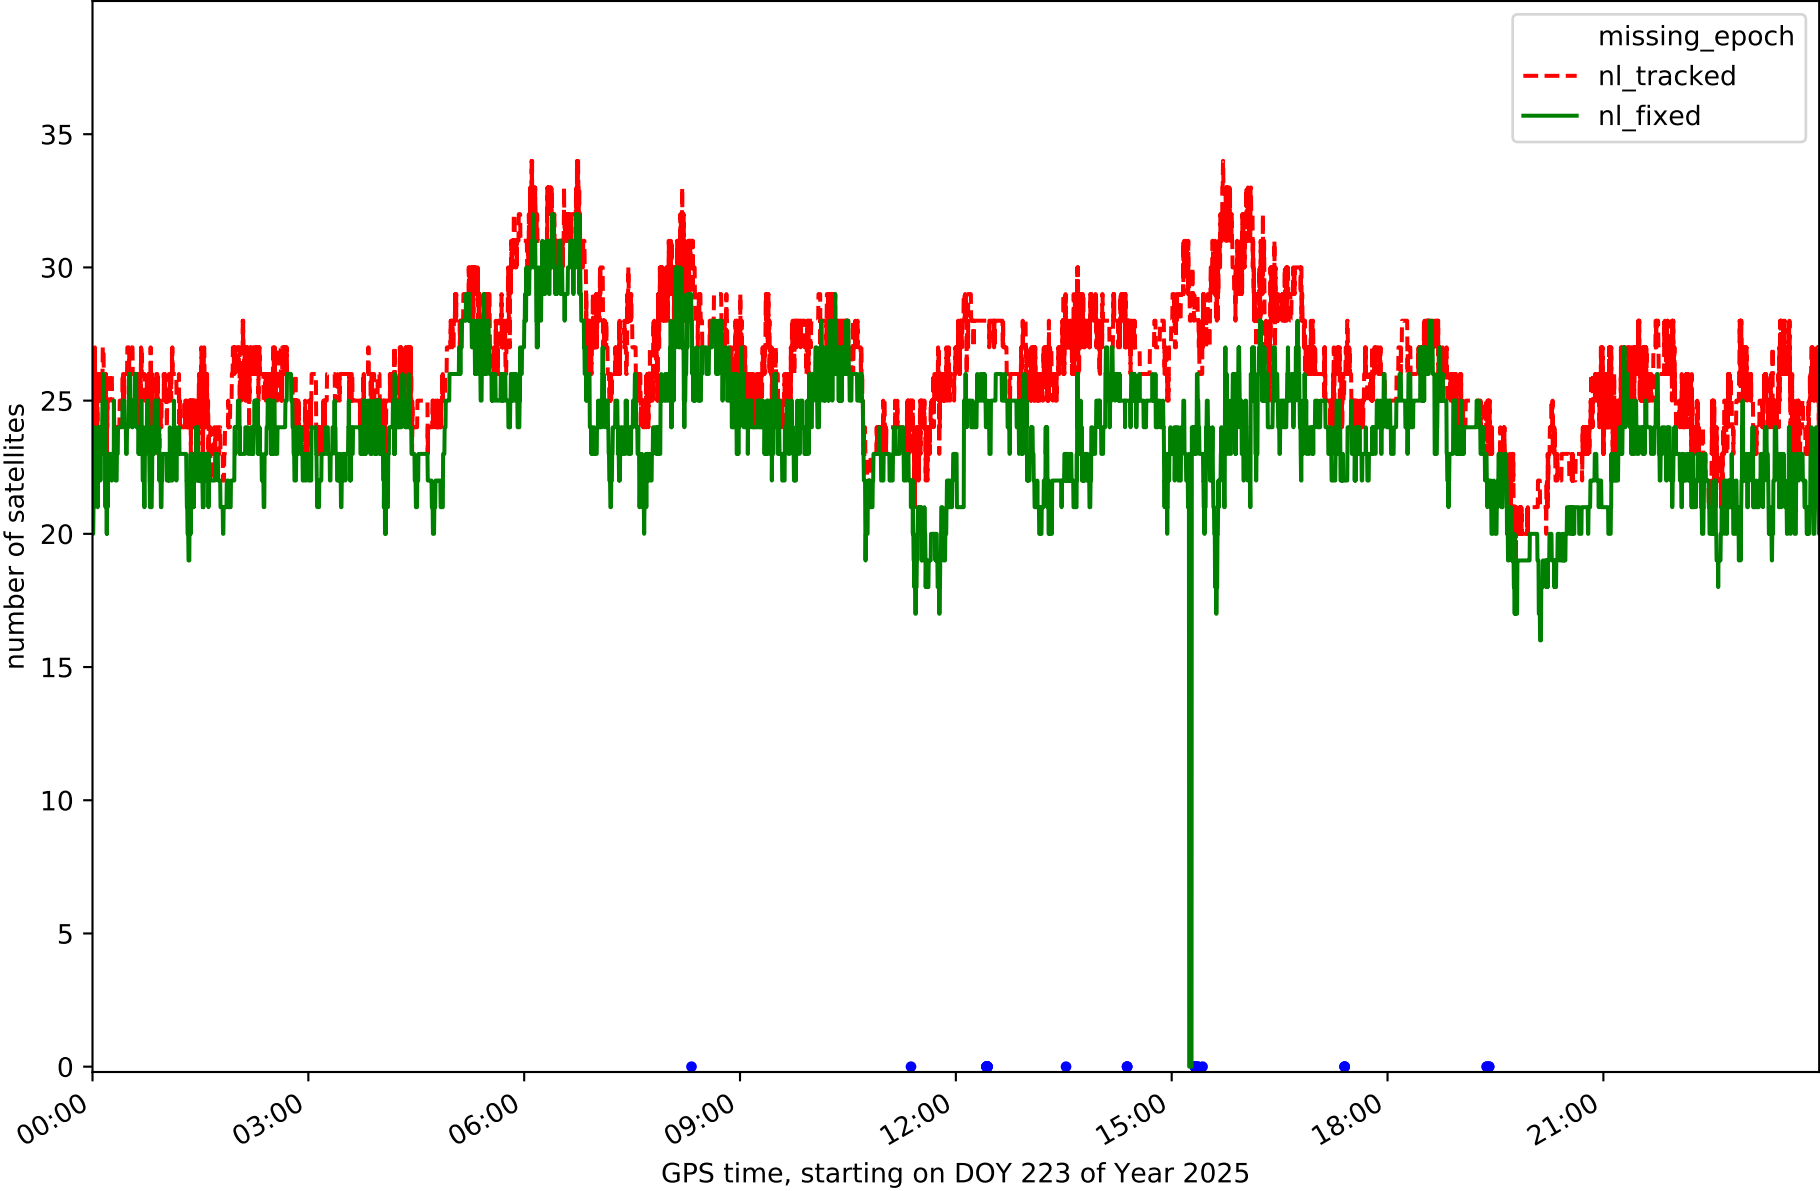


Station TN03 in network N32T

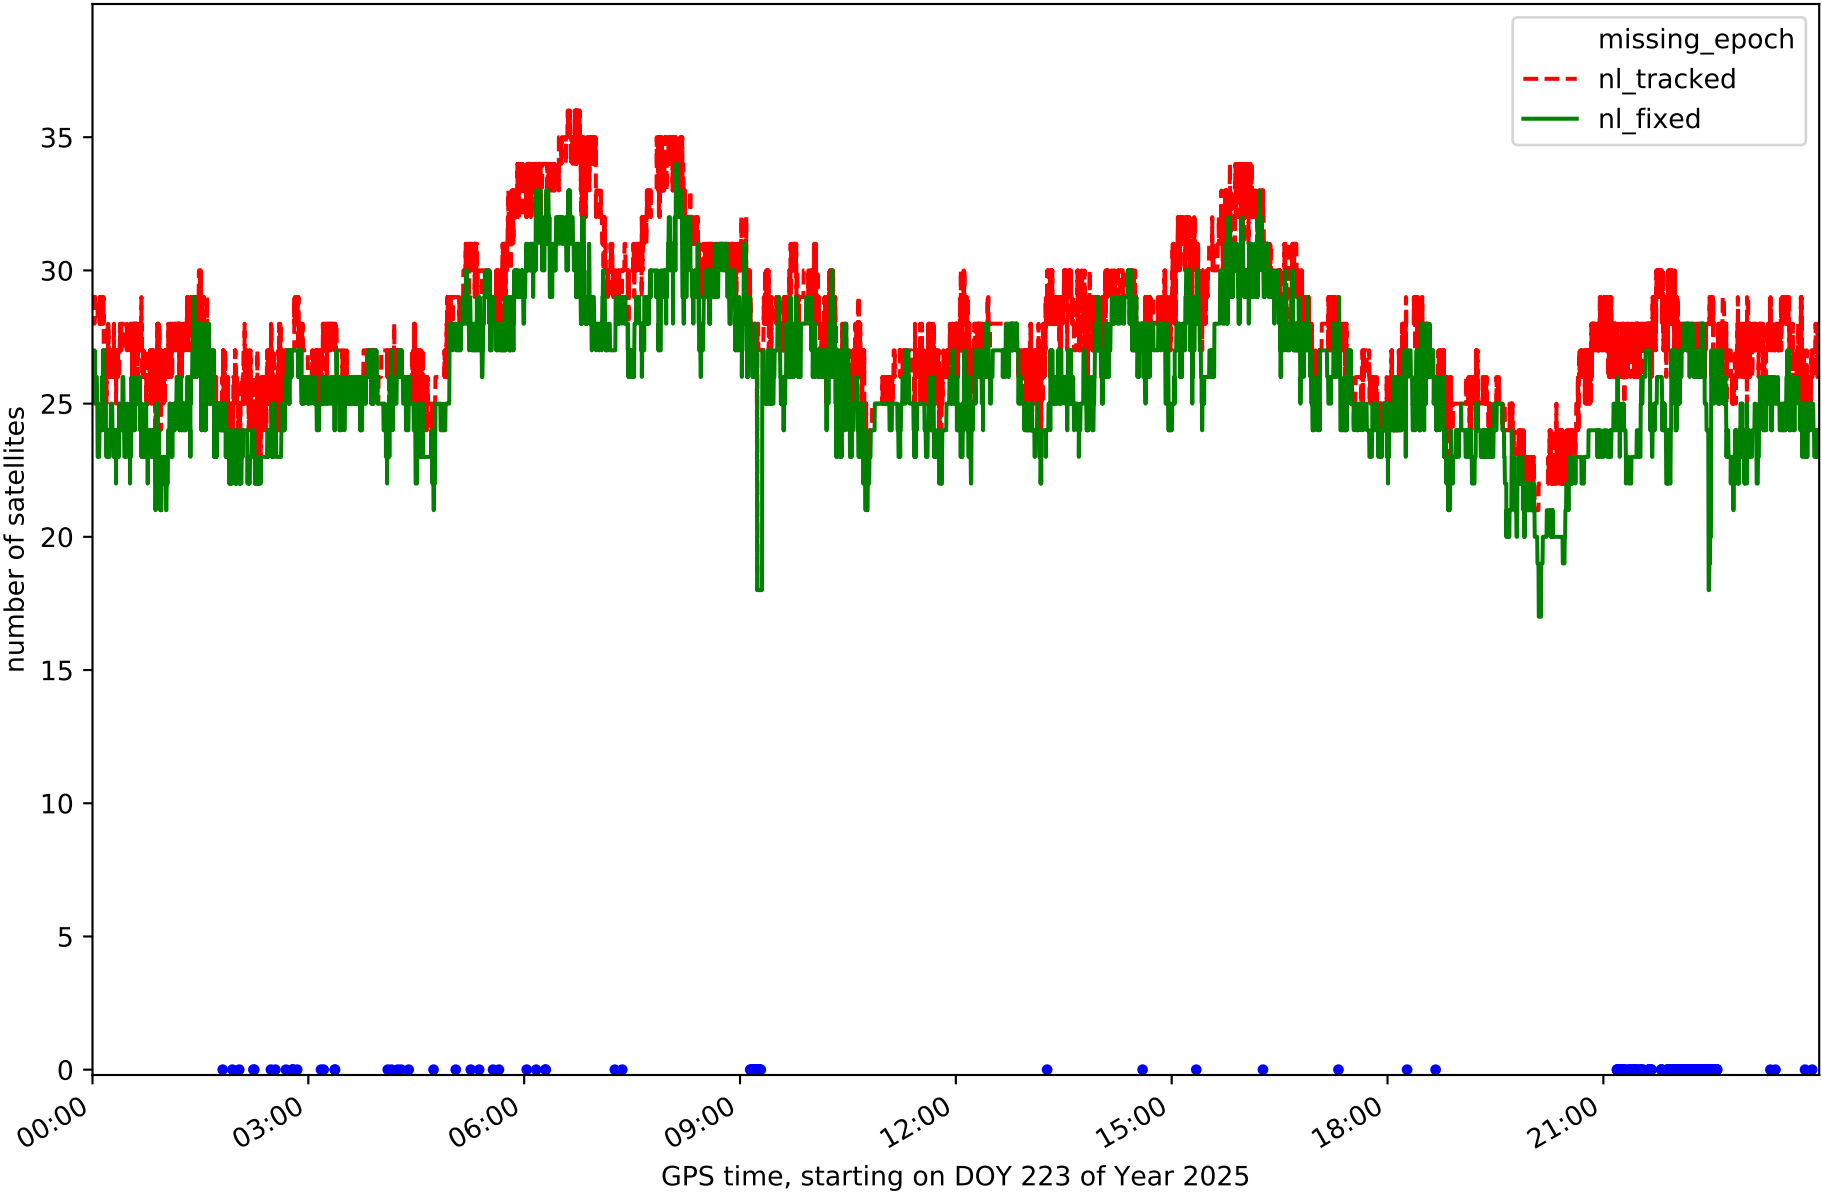


Station TN04 in network N32T

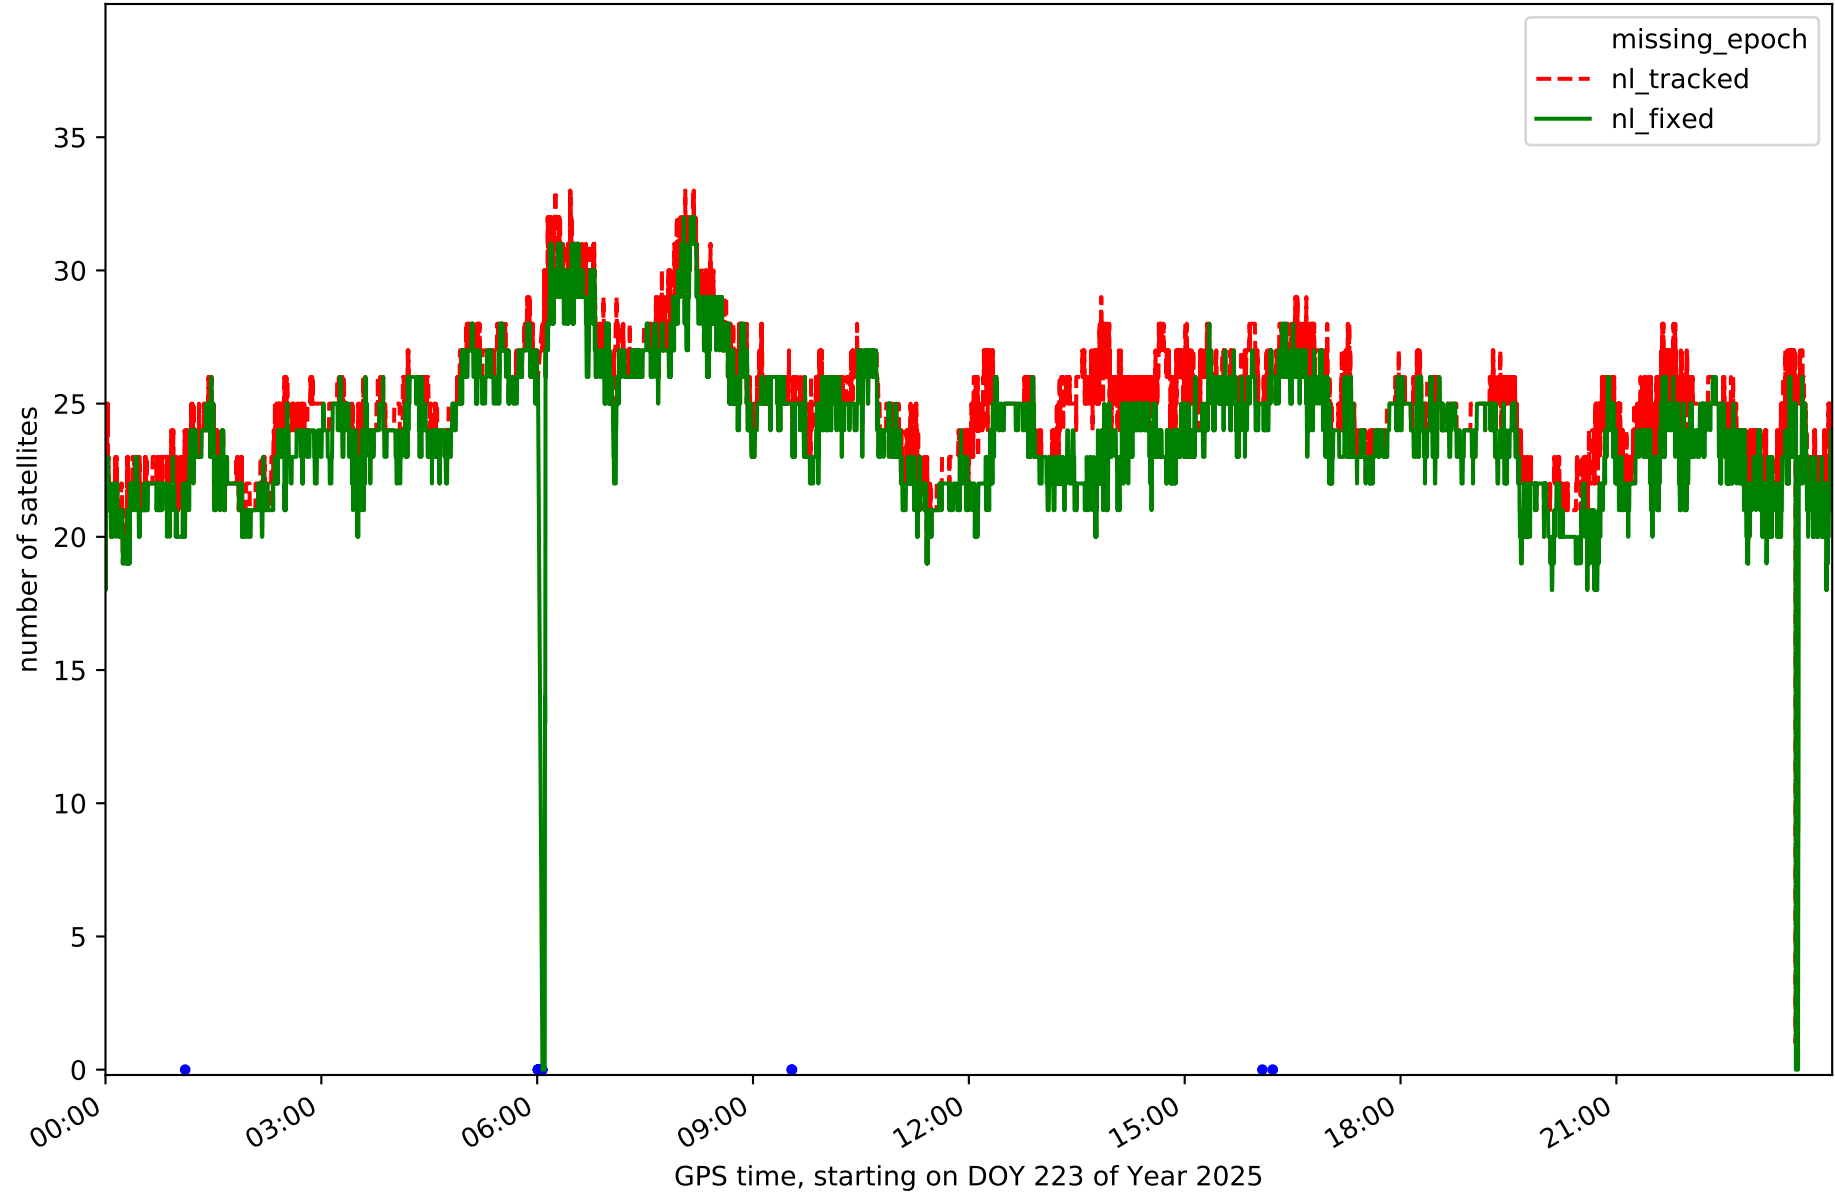


Station TN06 in network N32T

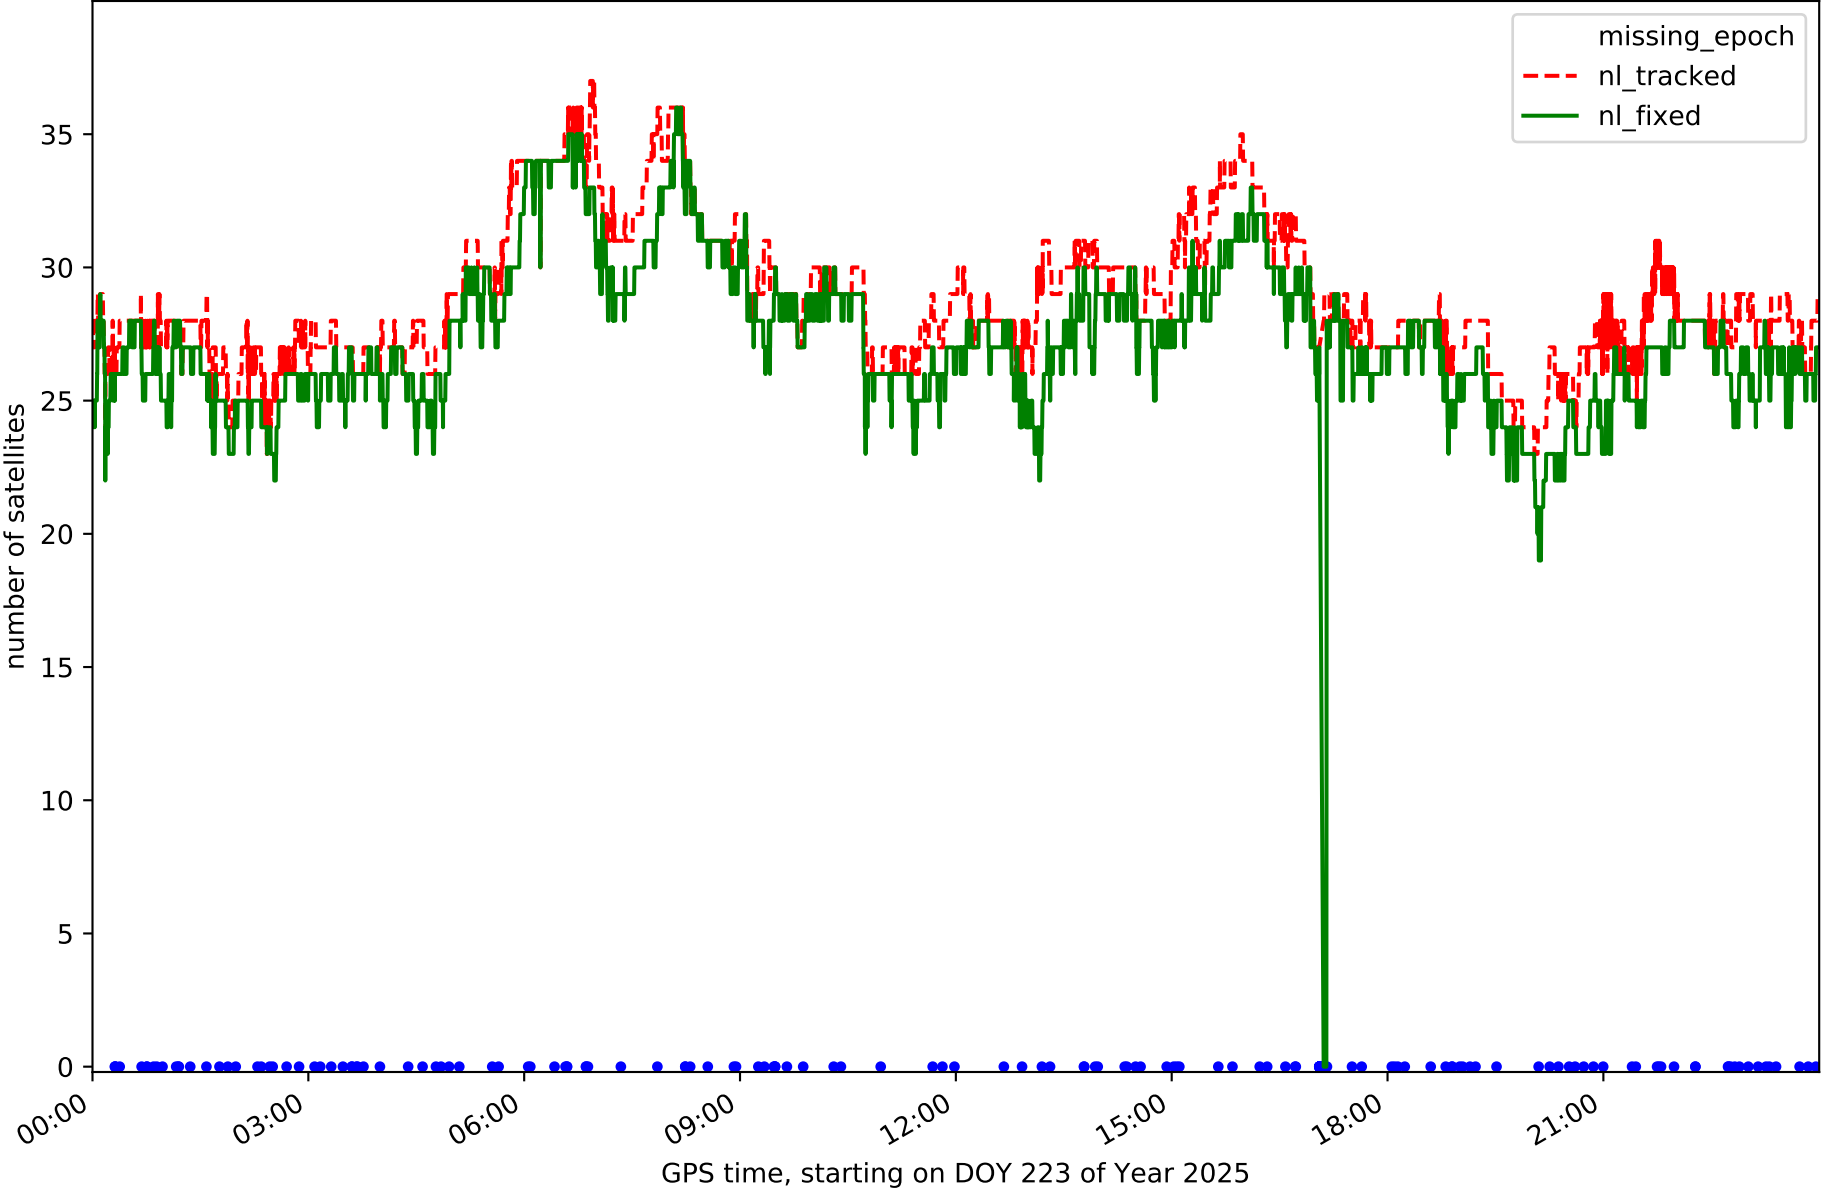


Station TN09 in network N32T

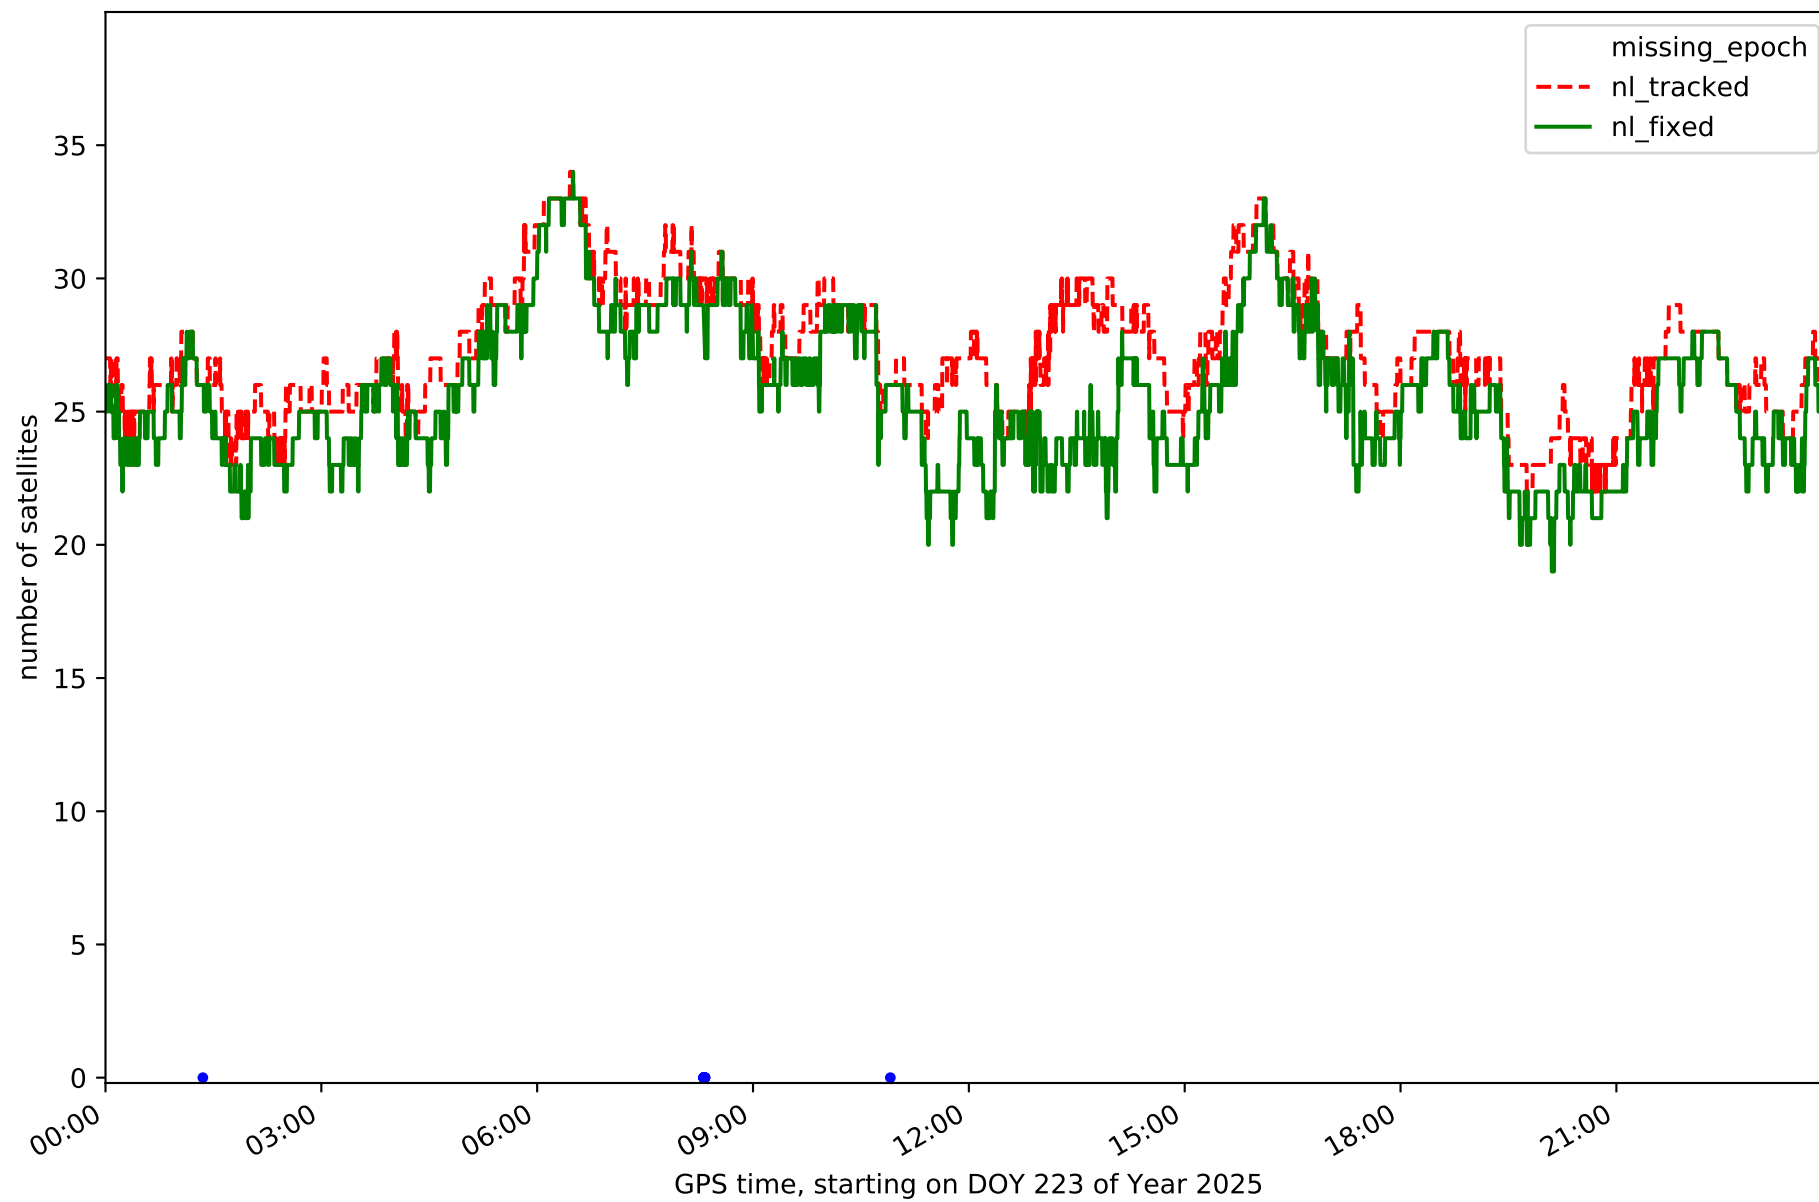


Station TE11 in network N32T

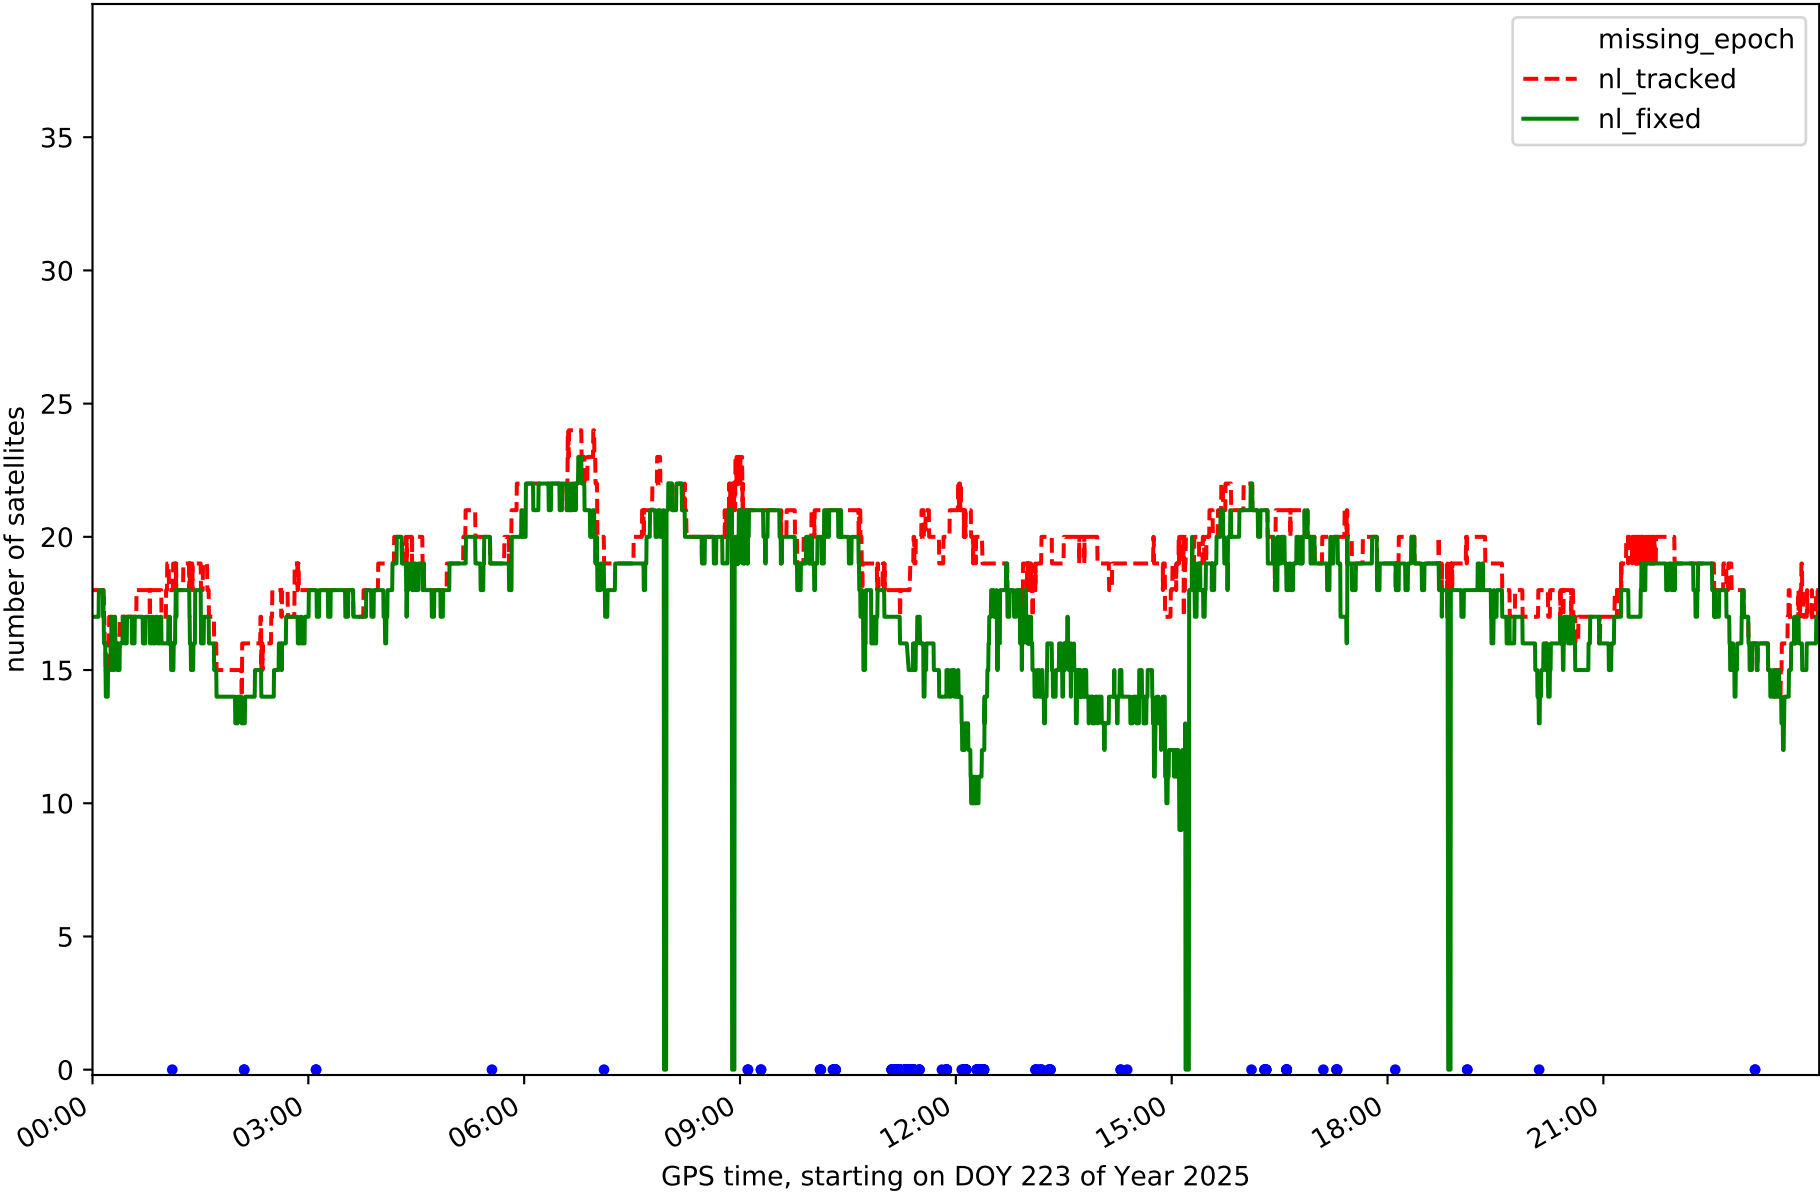


RefCheck for station EH01 in network N32T

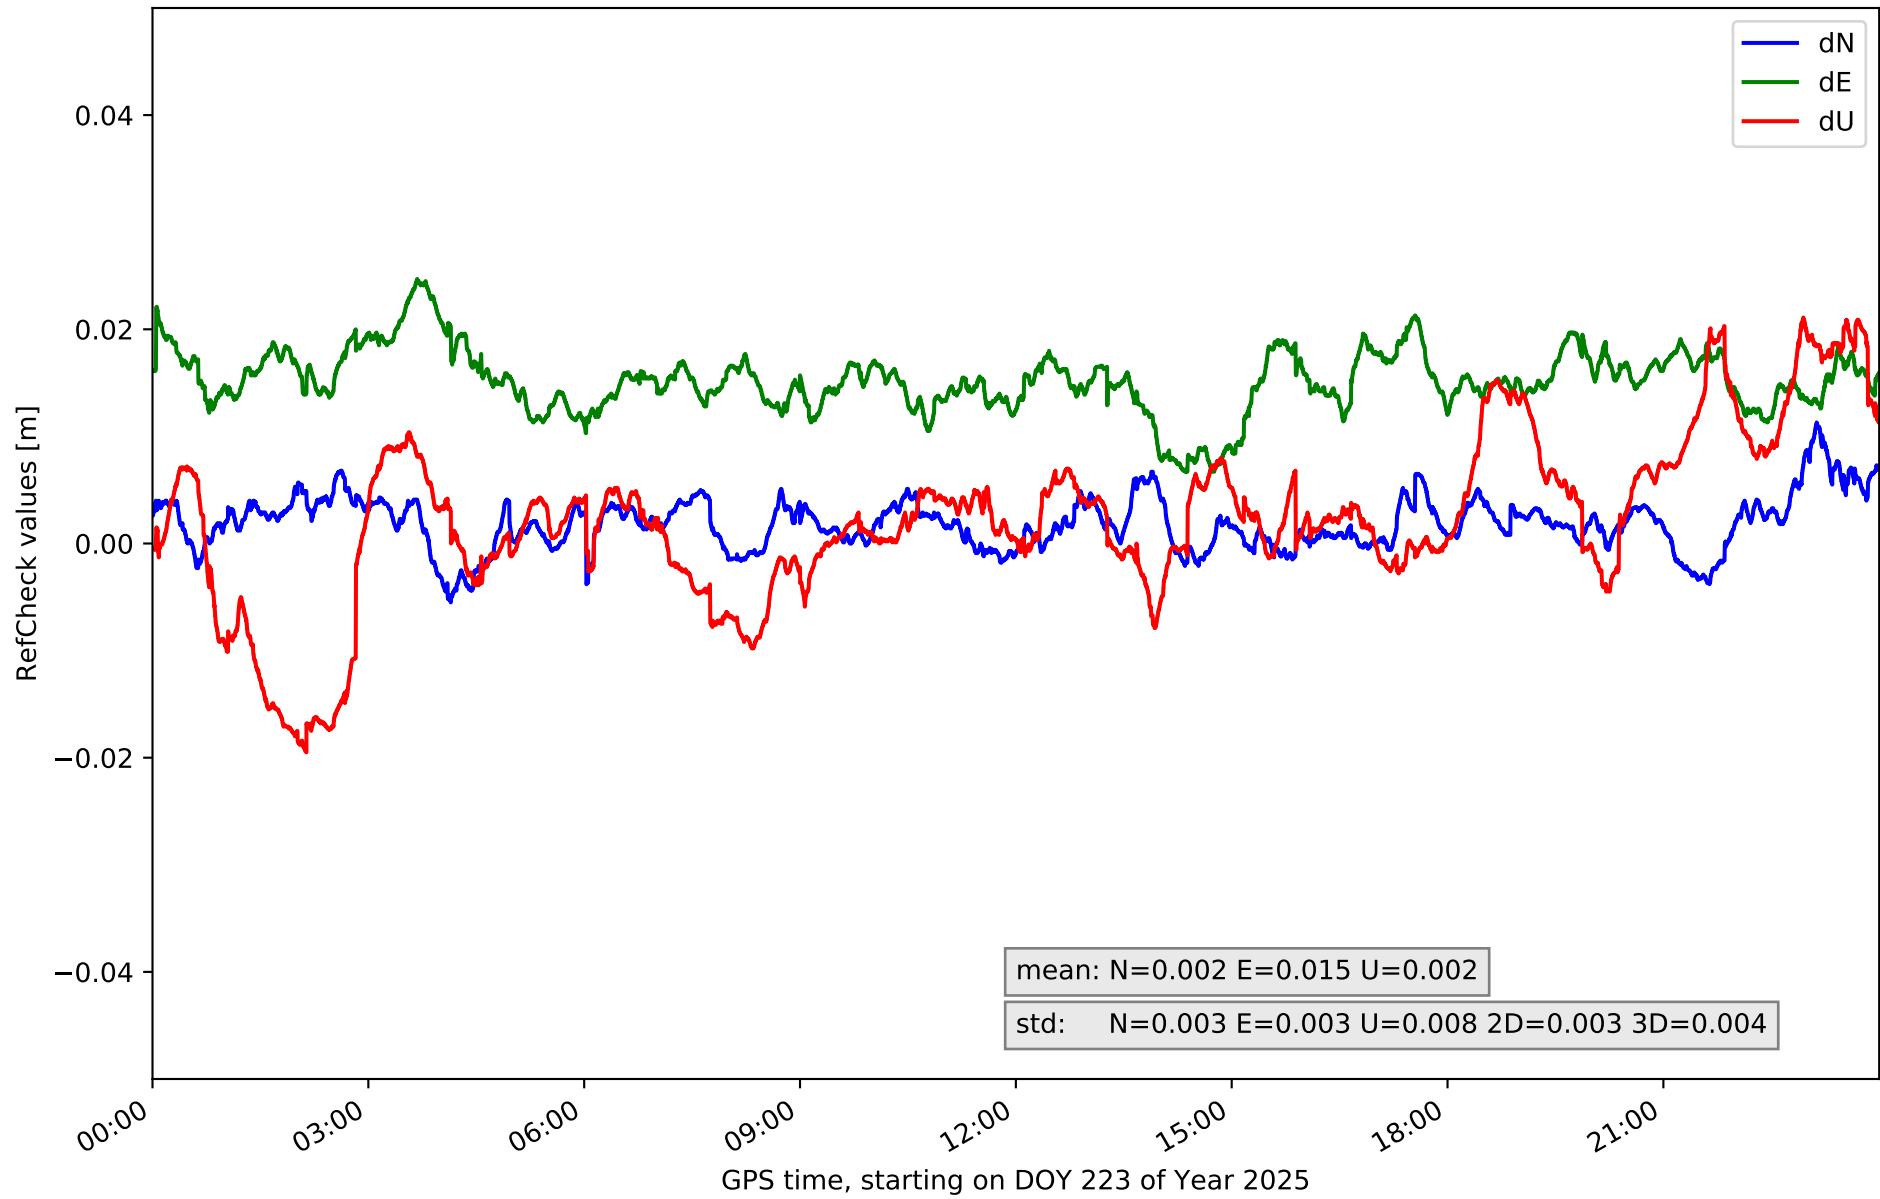


RefCheck for station EH02 in network N32T

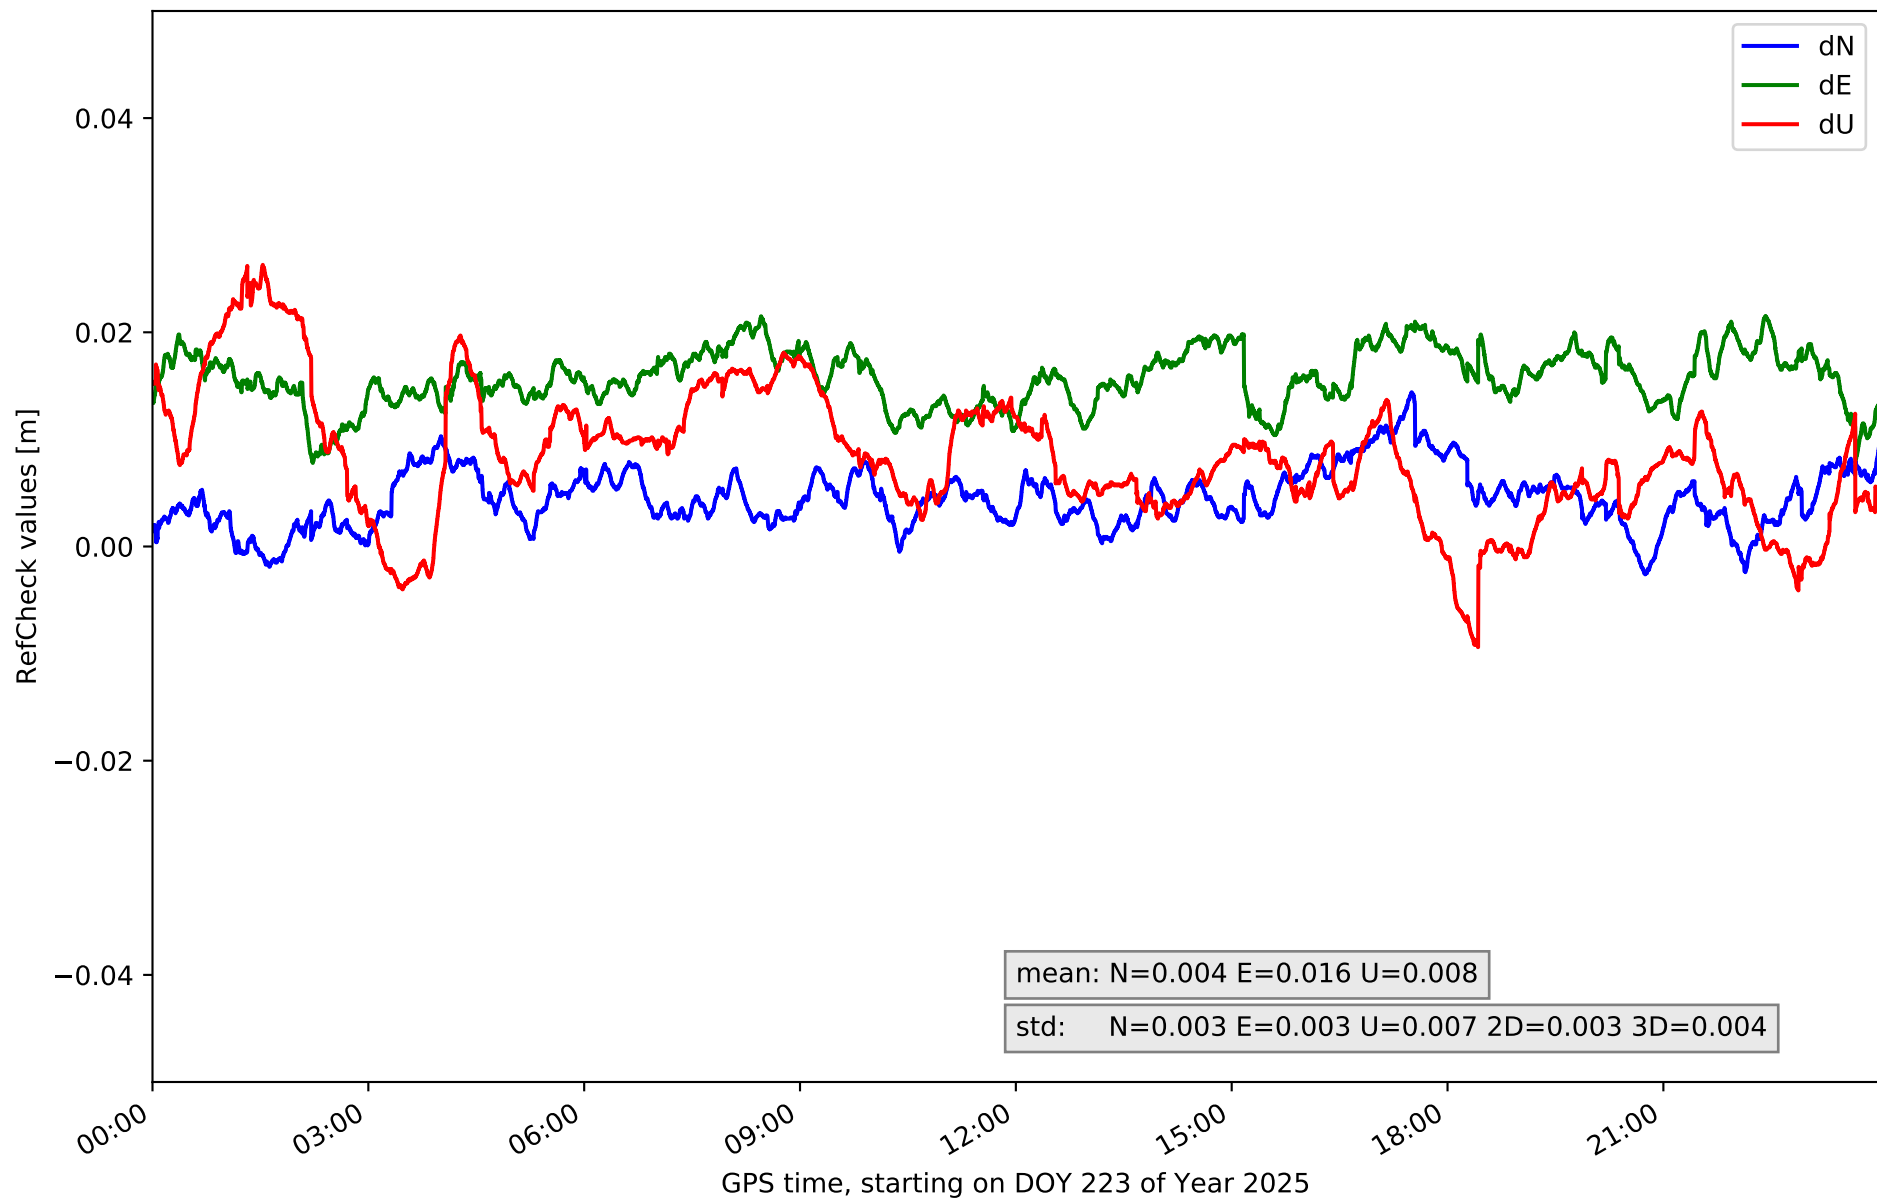


RefCheck for station GOM1 in network N32T

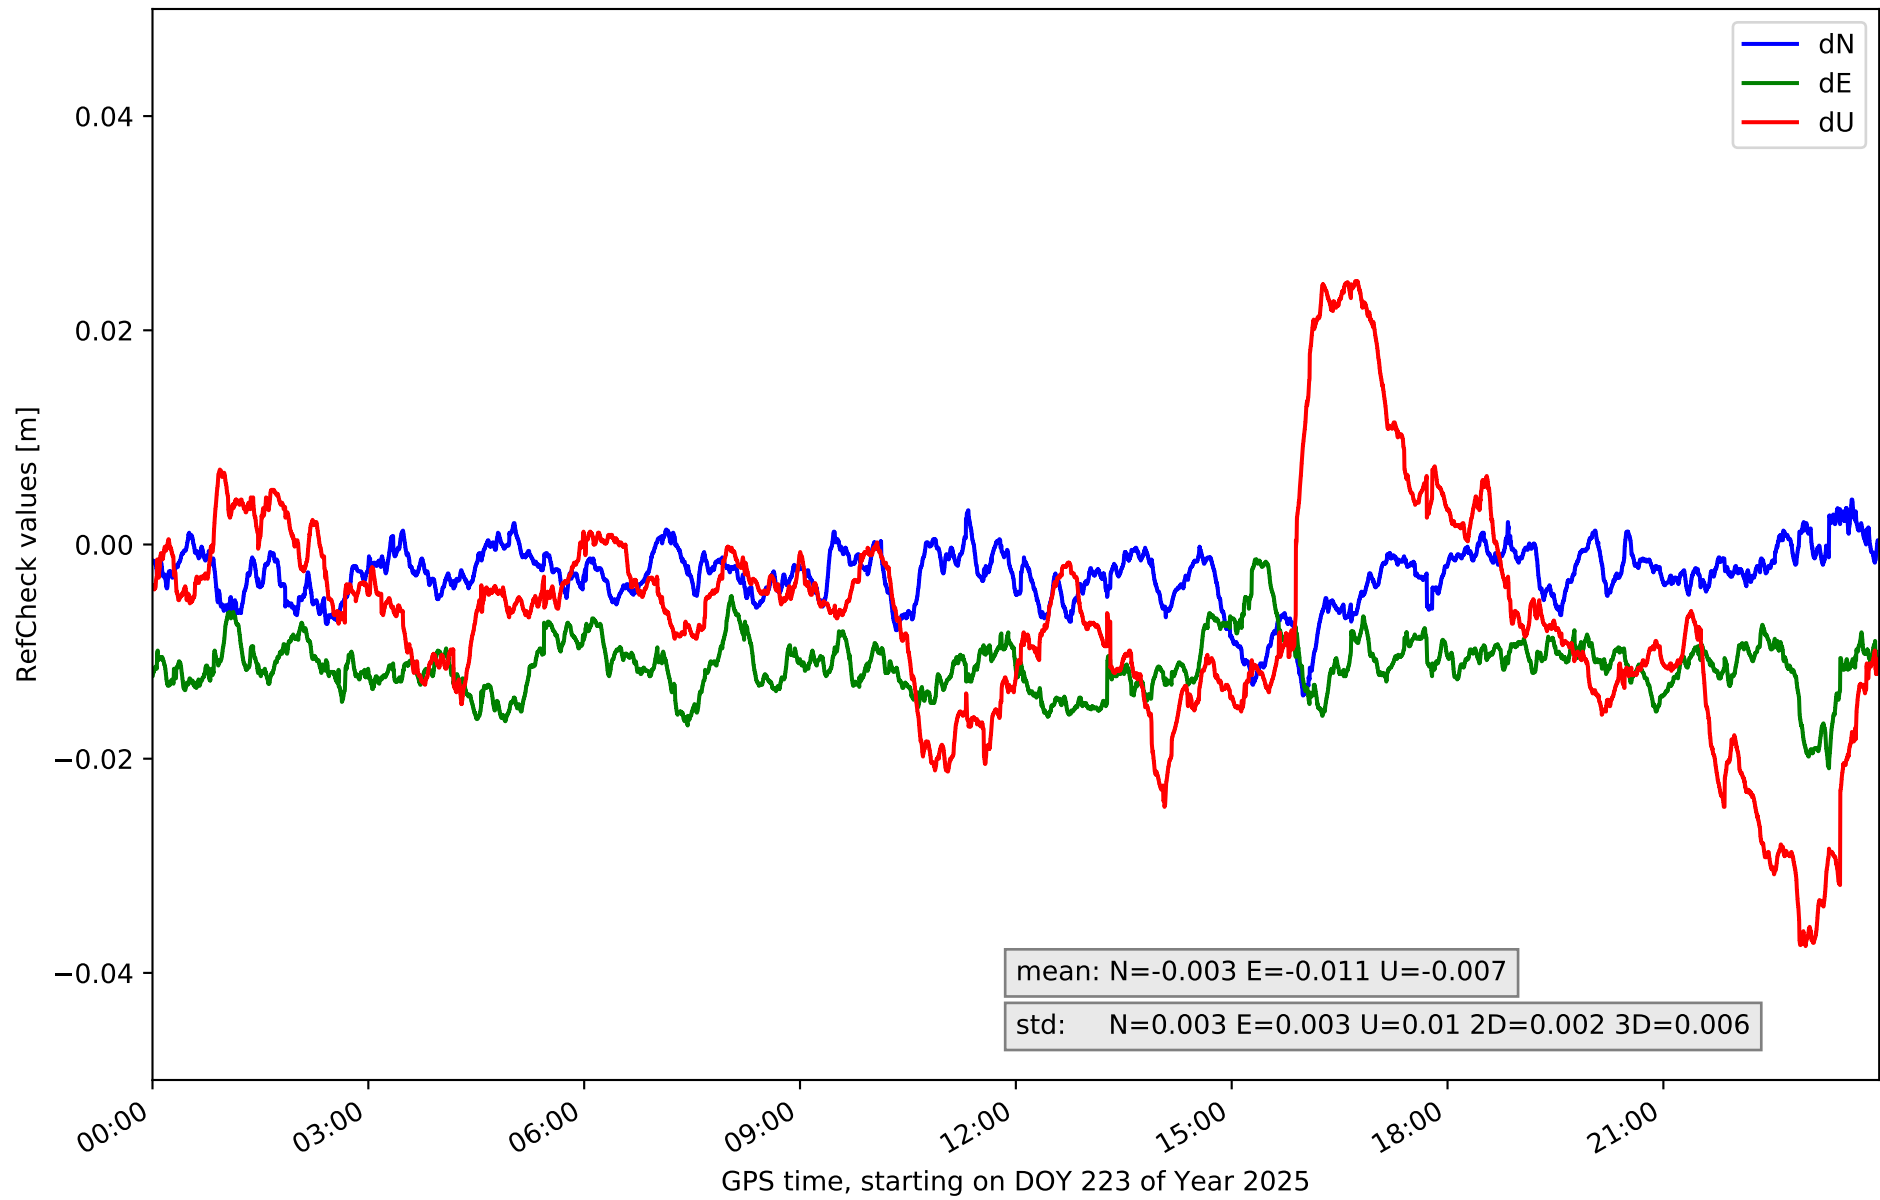


RefCheck for station IZAN in network N32T

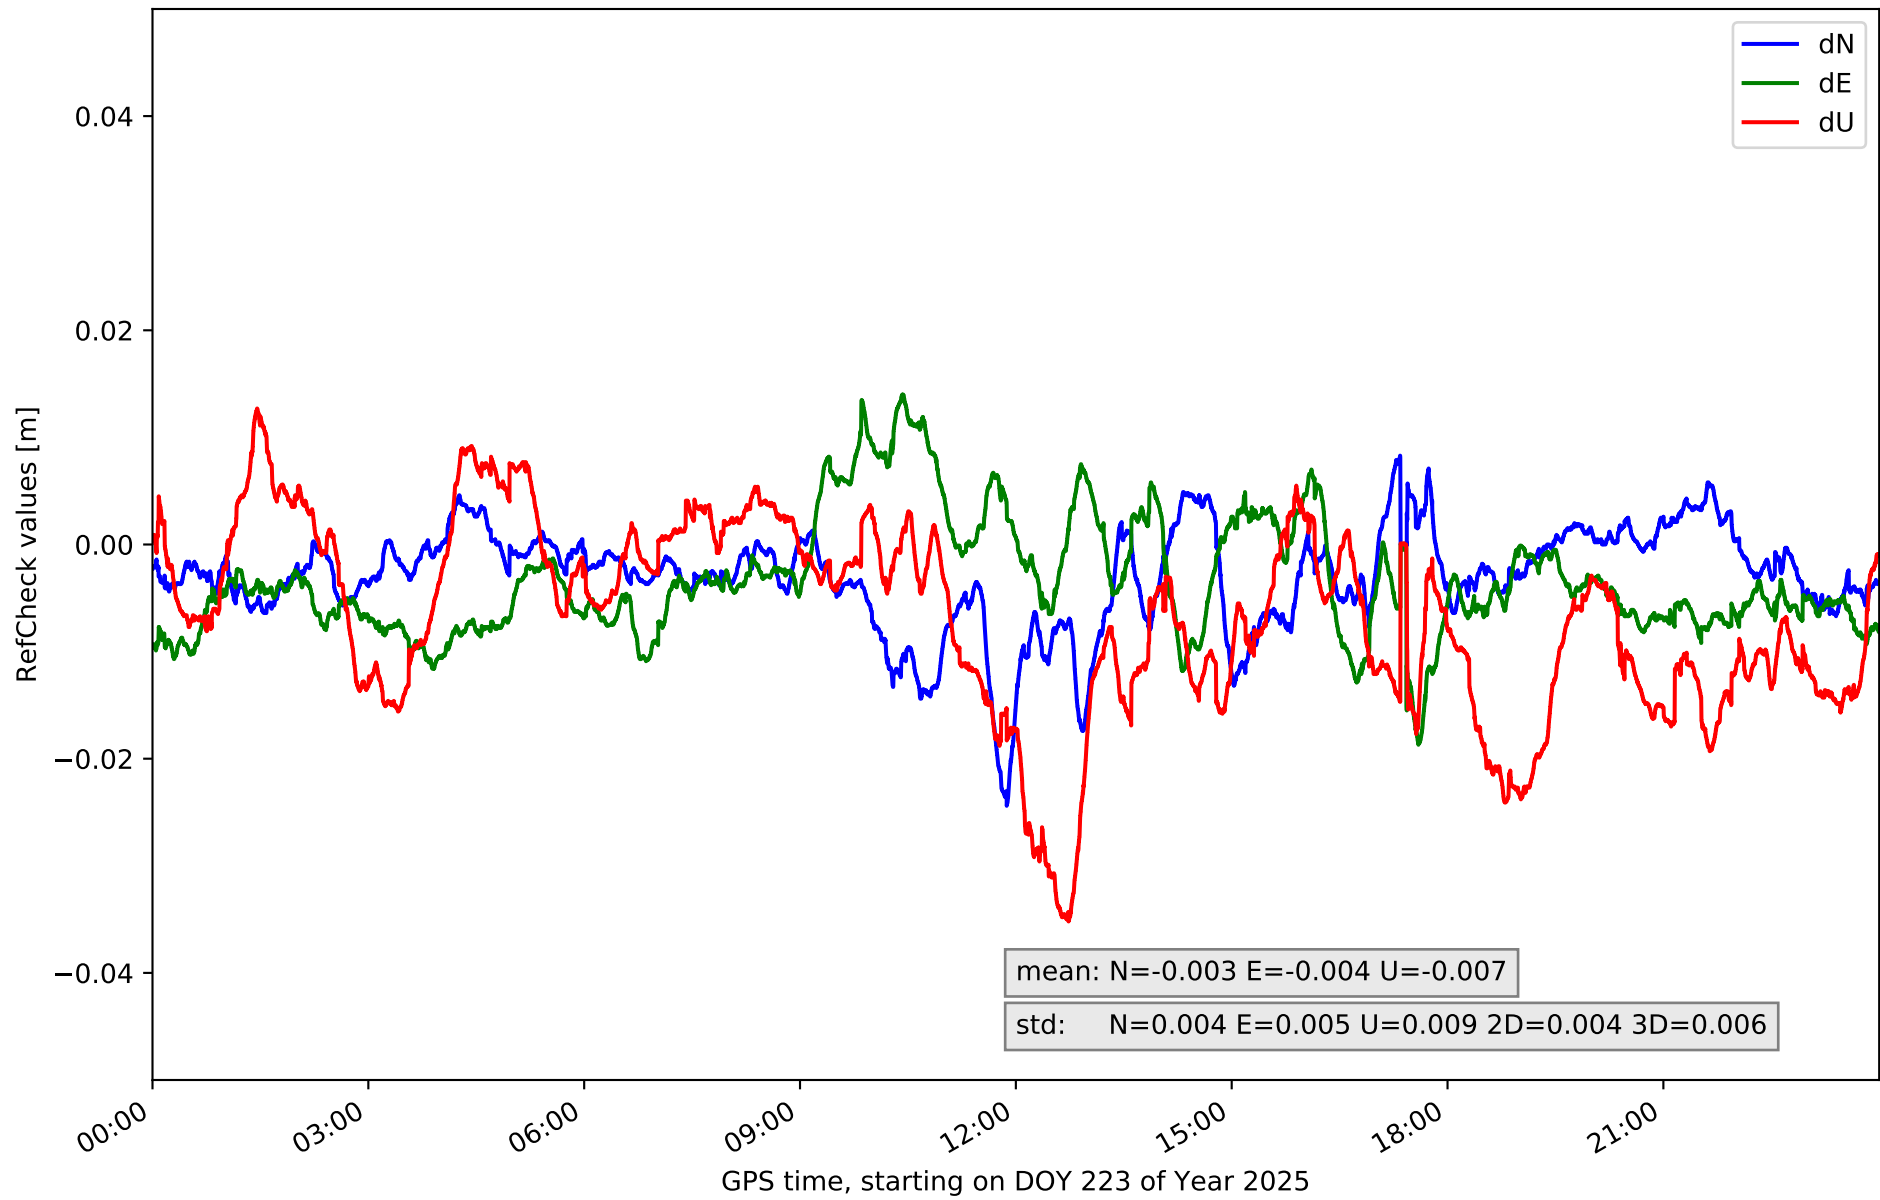


RefCheck for station LP01 in network N32T

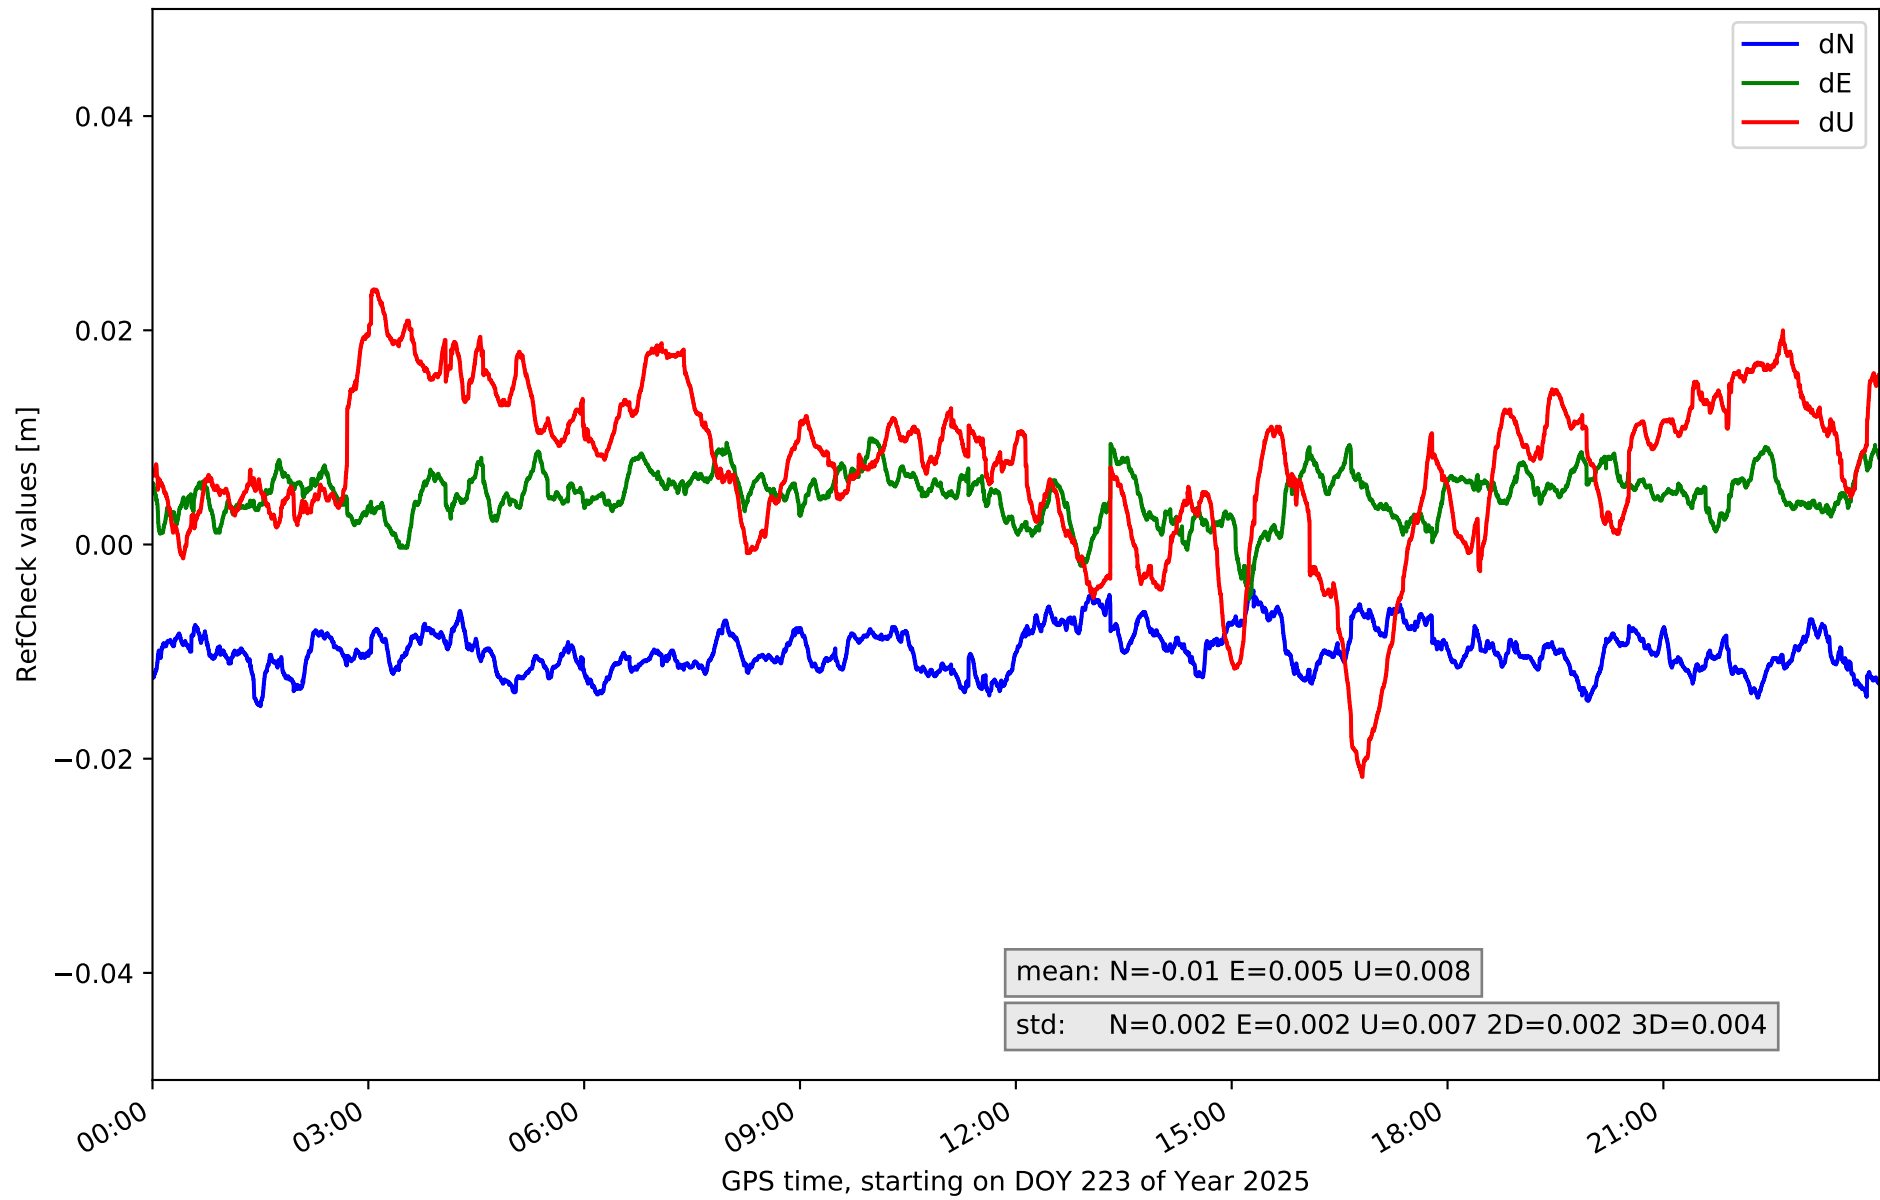


RefCheck for station LP03 in network N32T

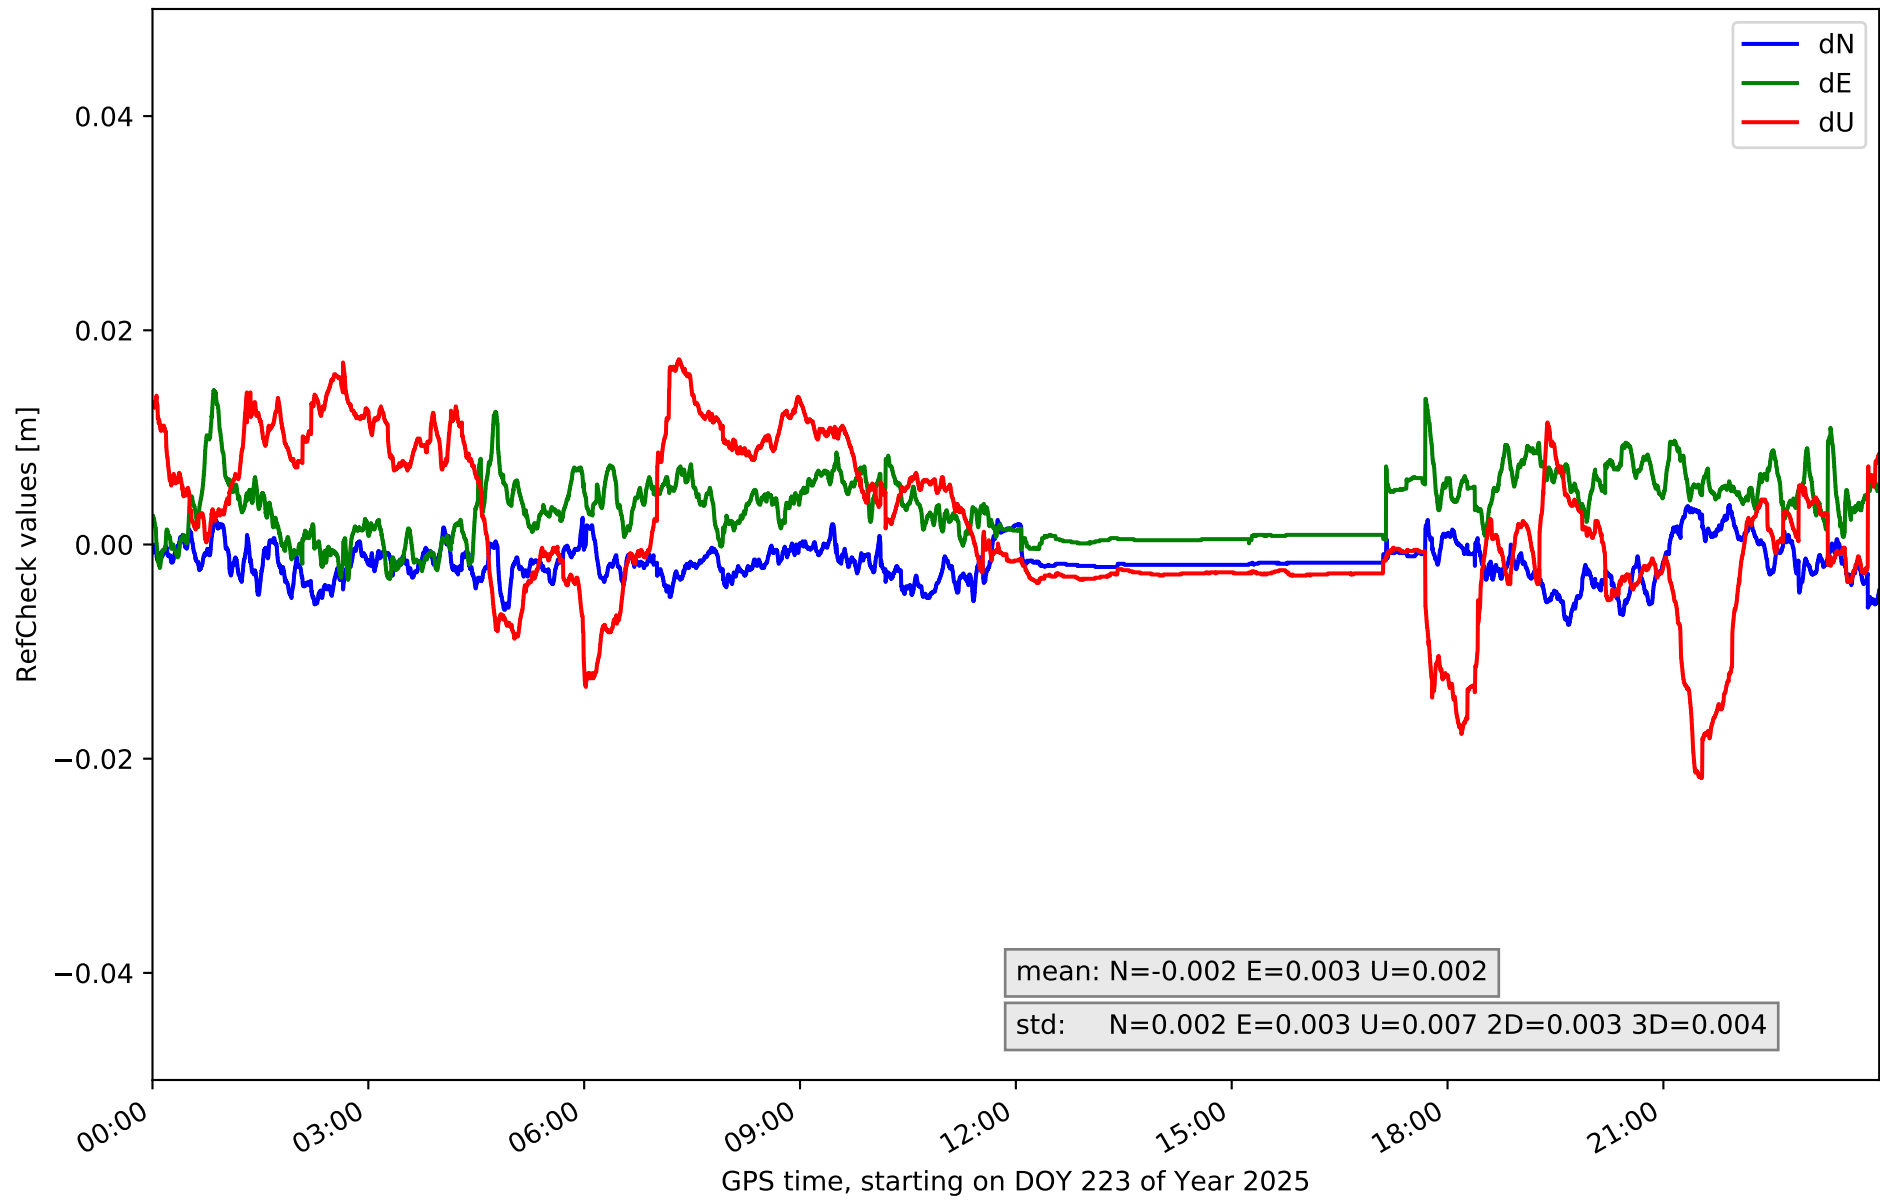


RefCheck for station LPAL in network N32T

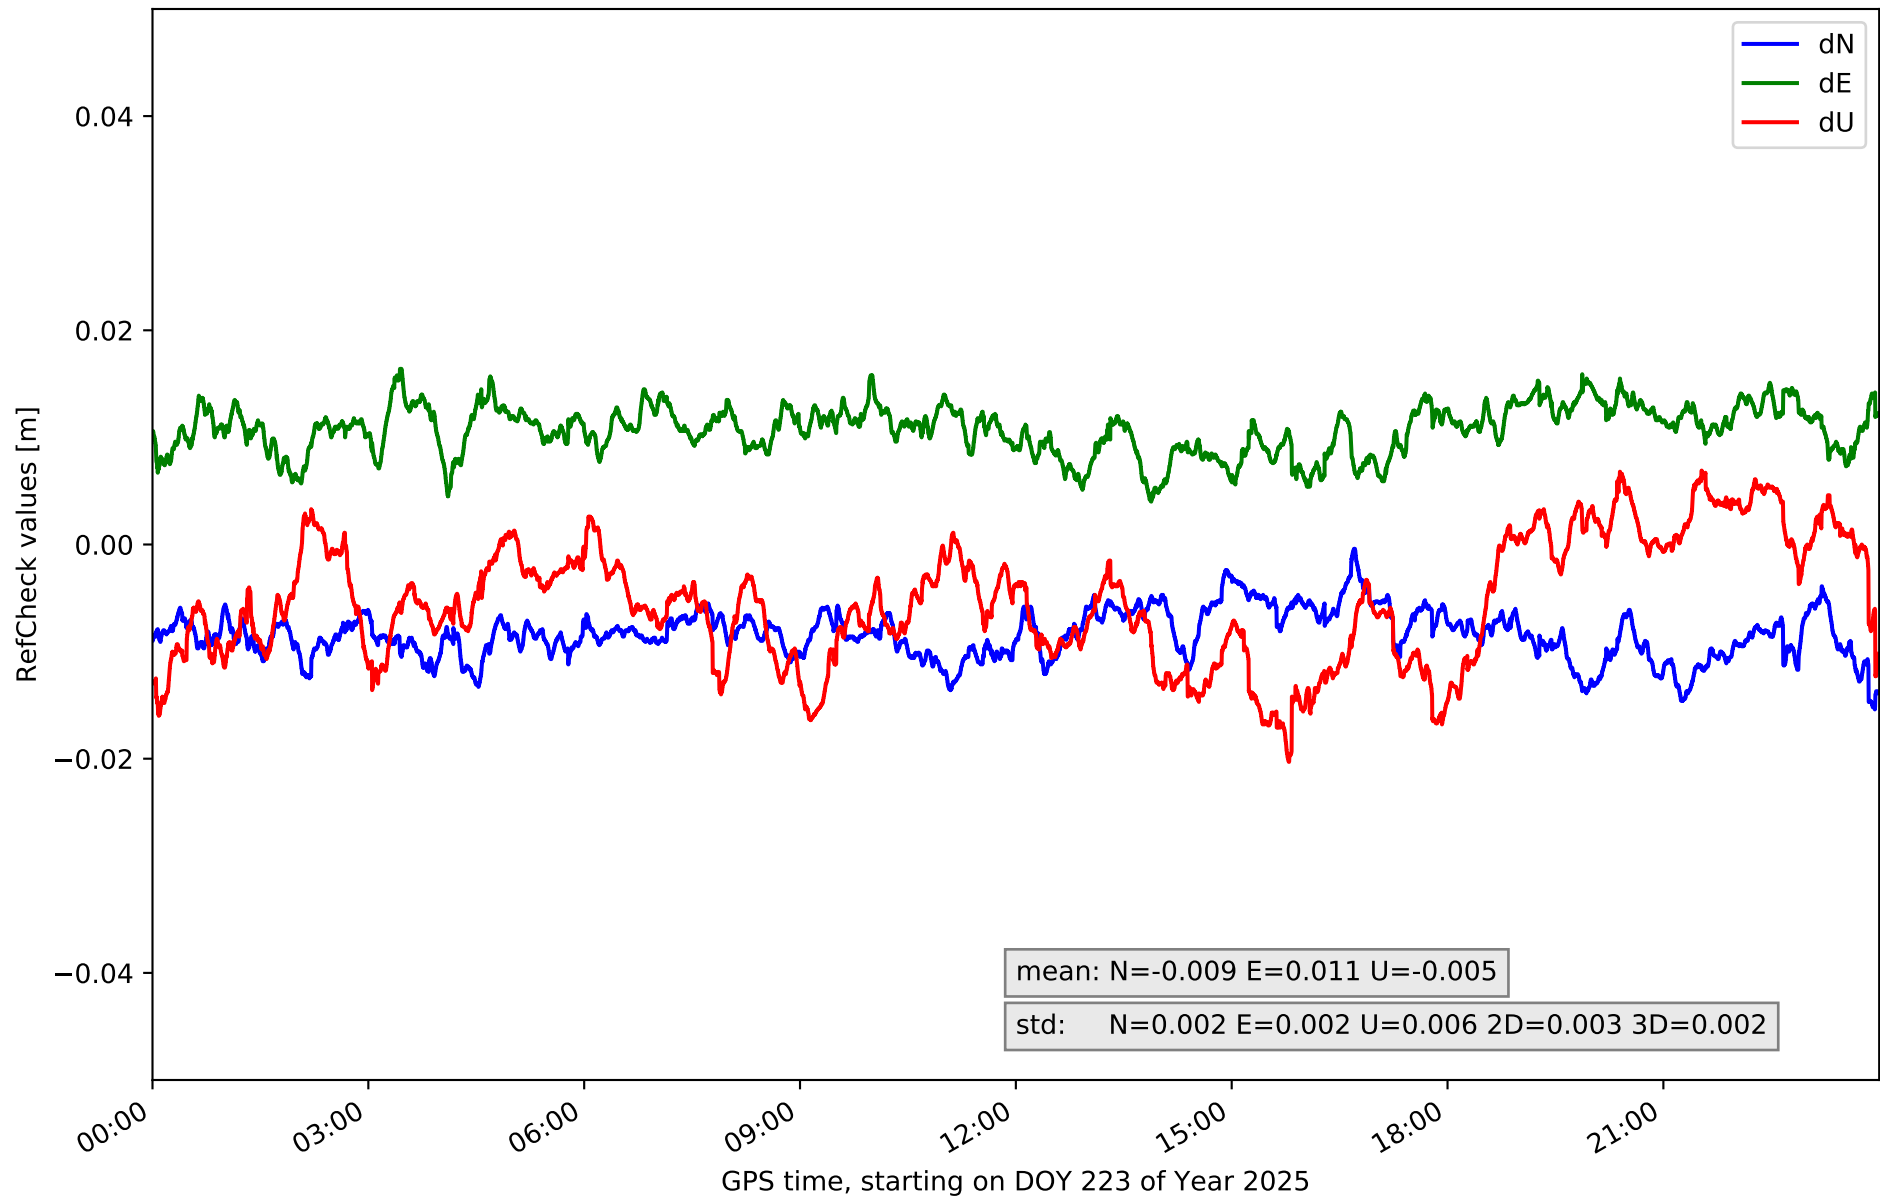


RefCheck for station LRES in network N32T

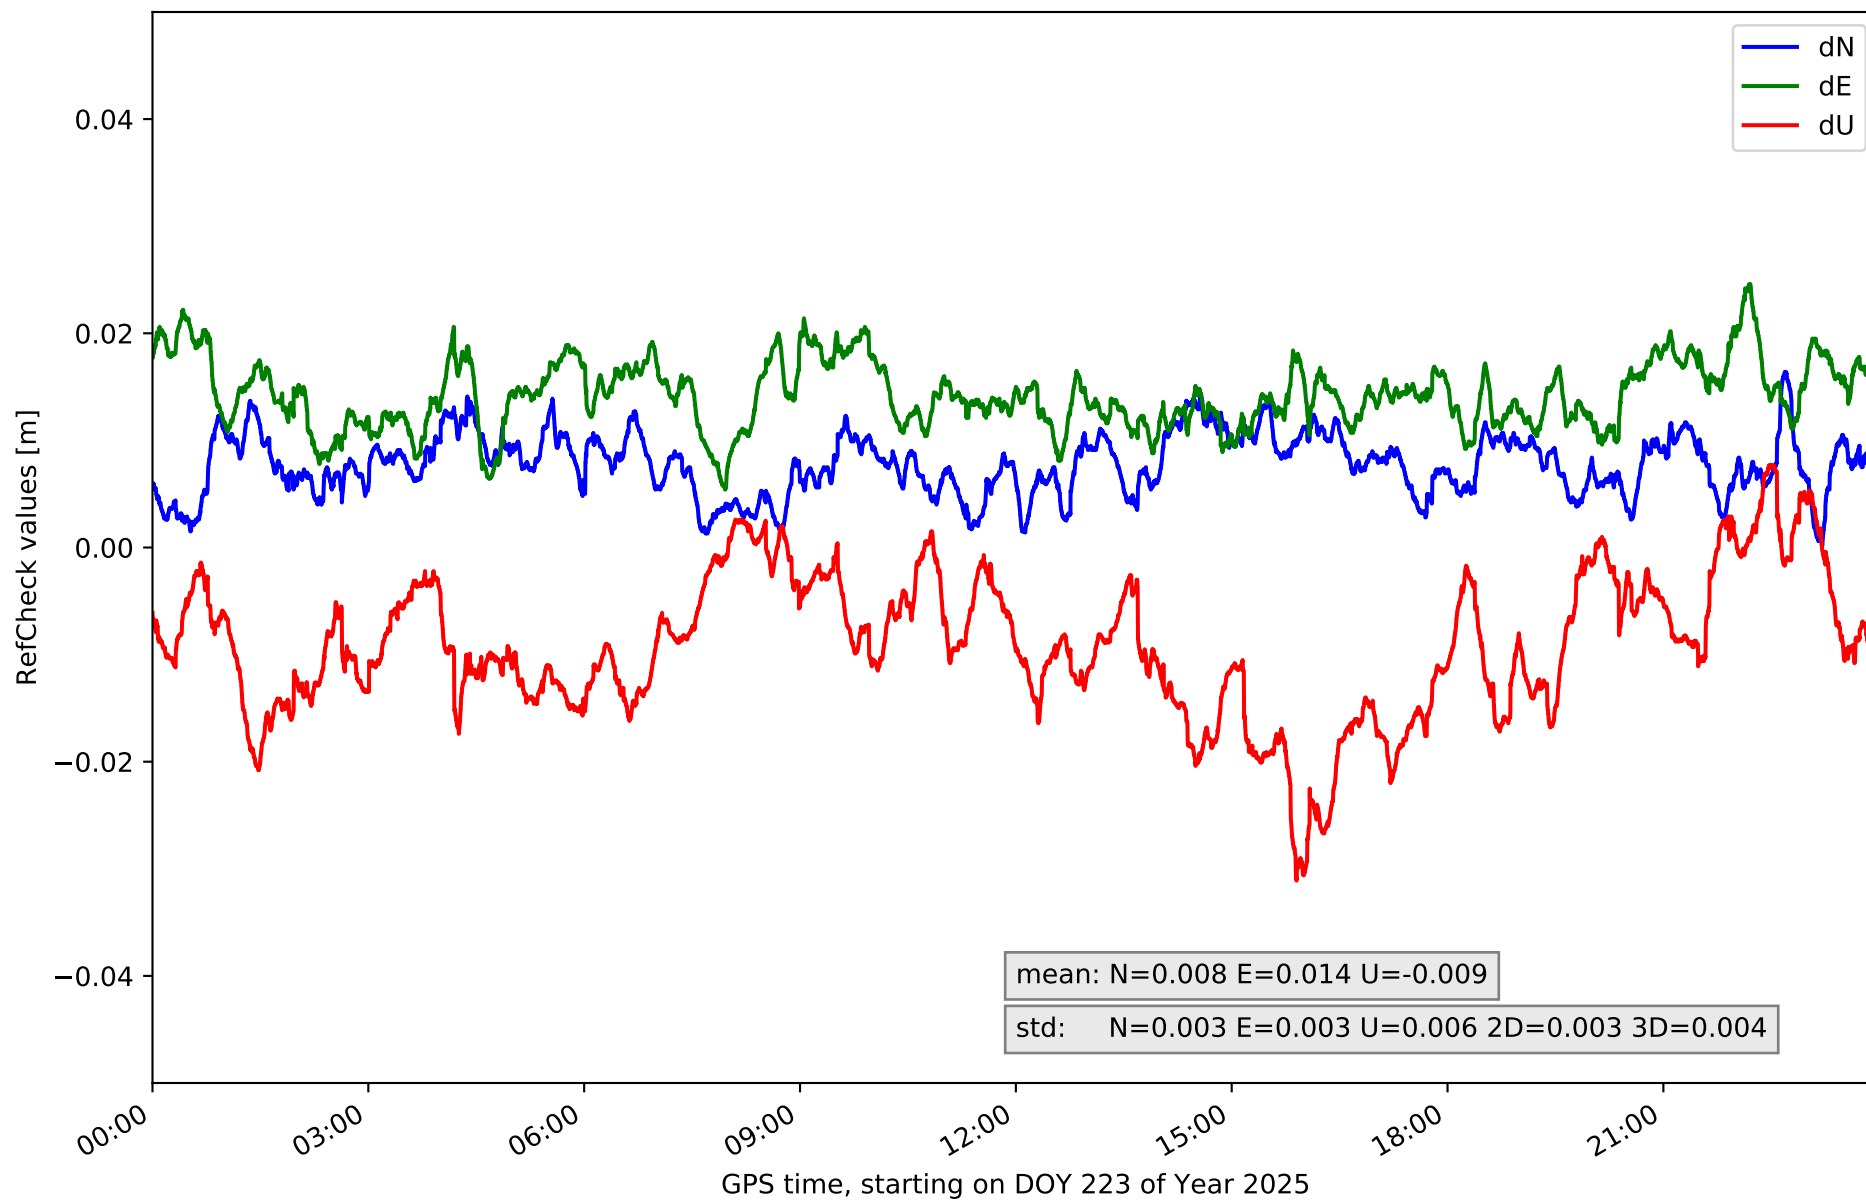


RefCheck for station TN01 in network N32T

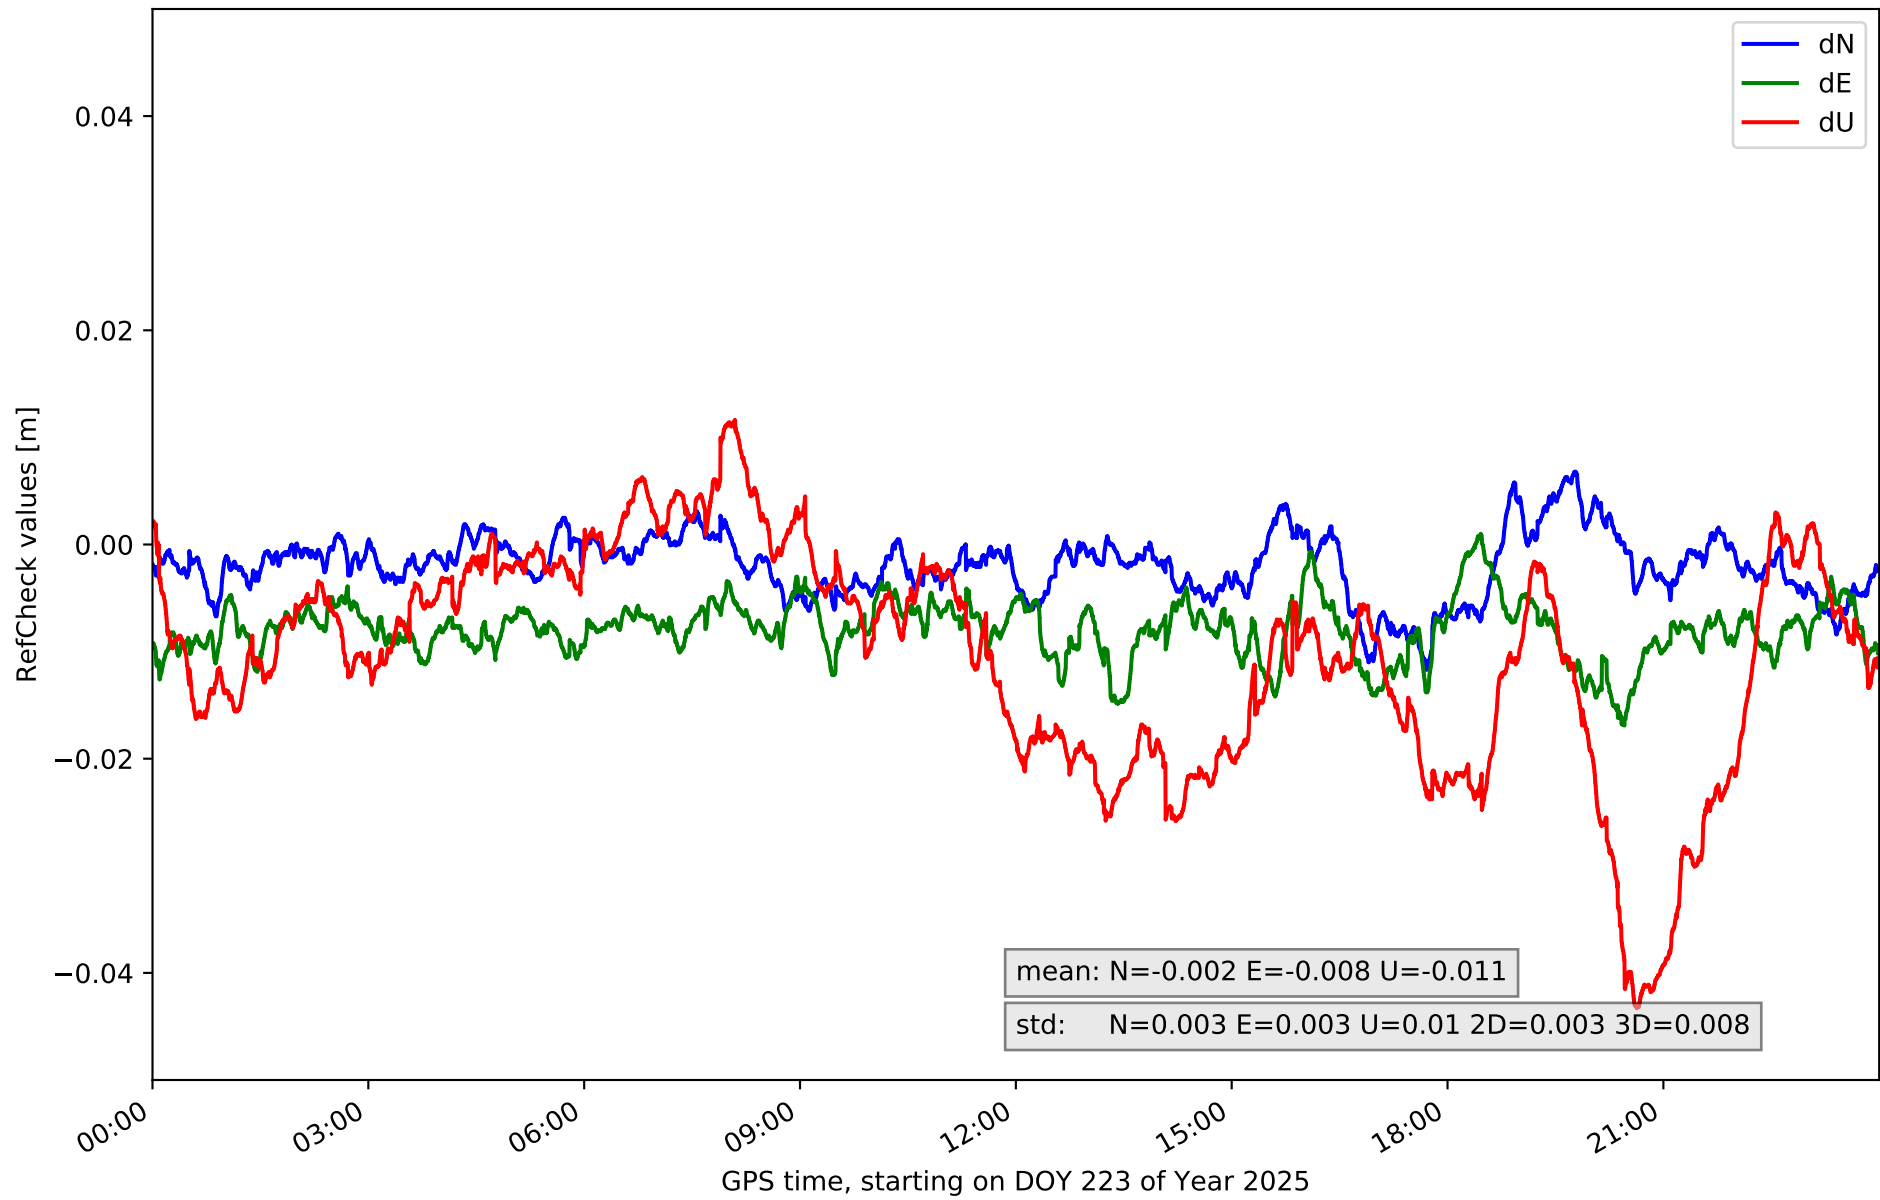


RefCheck for station TN02 in network N32T

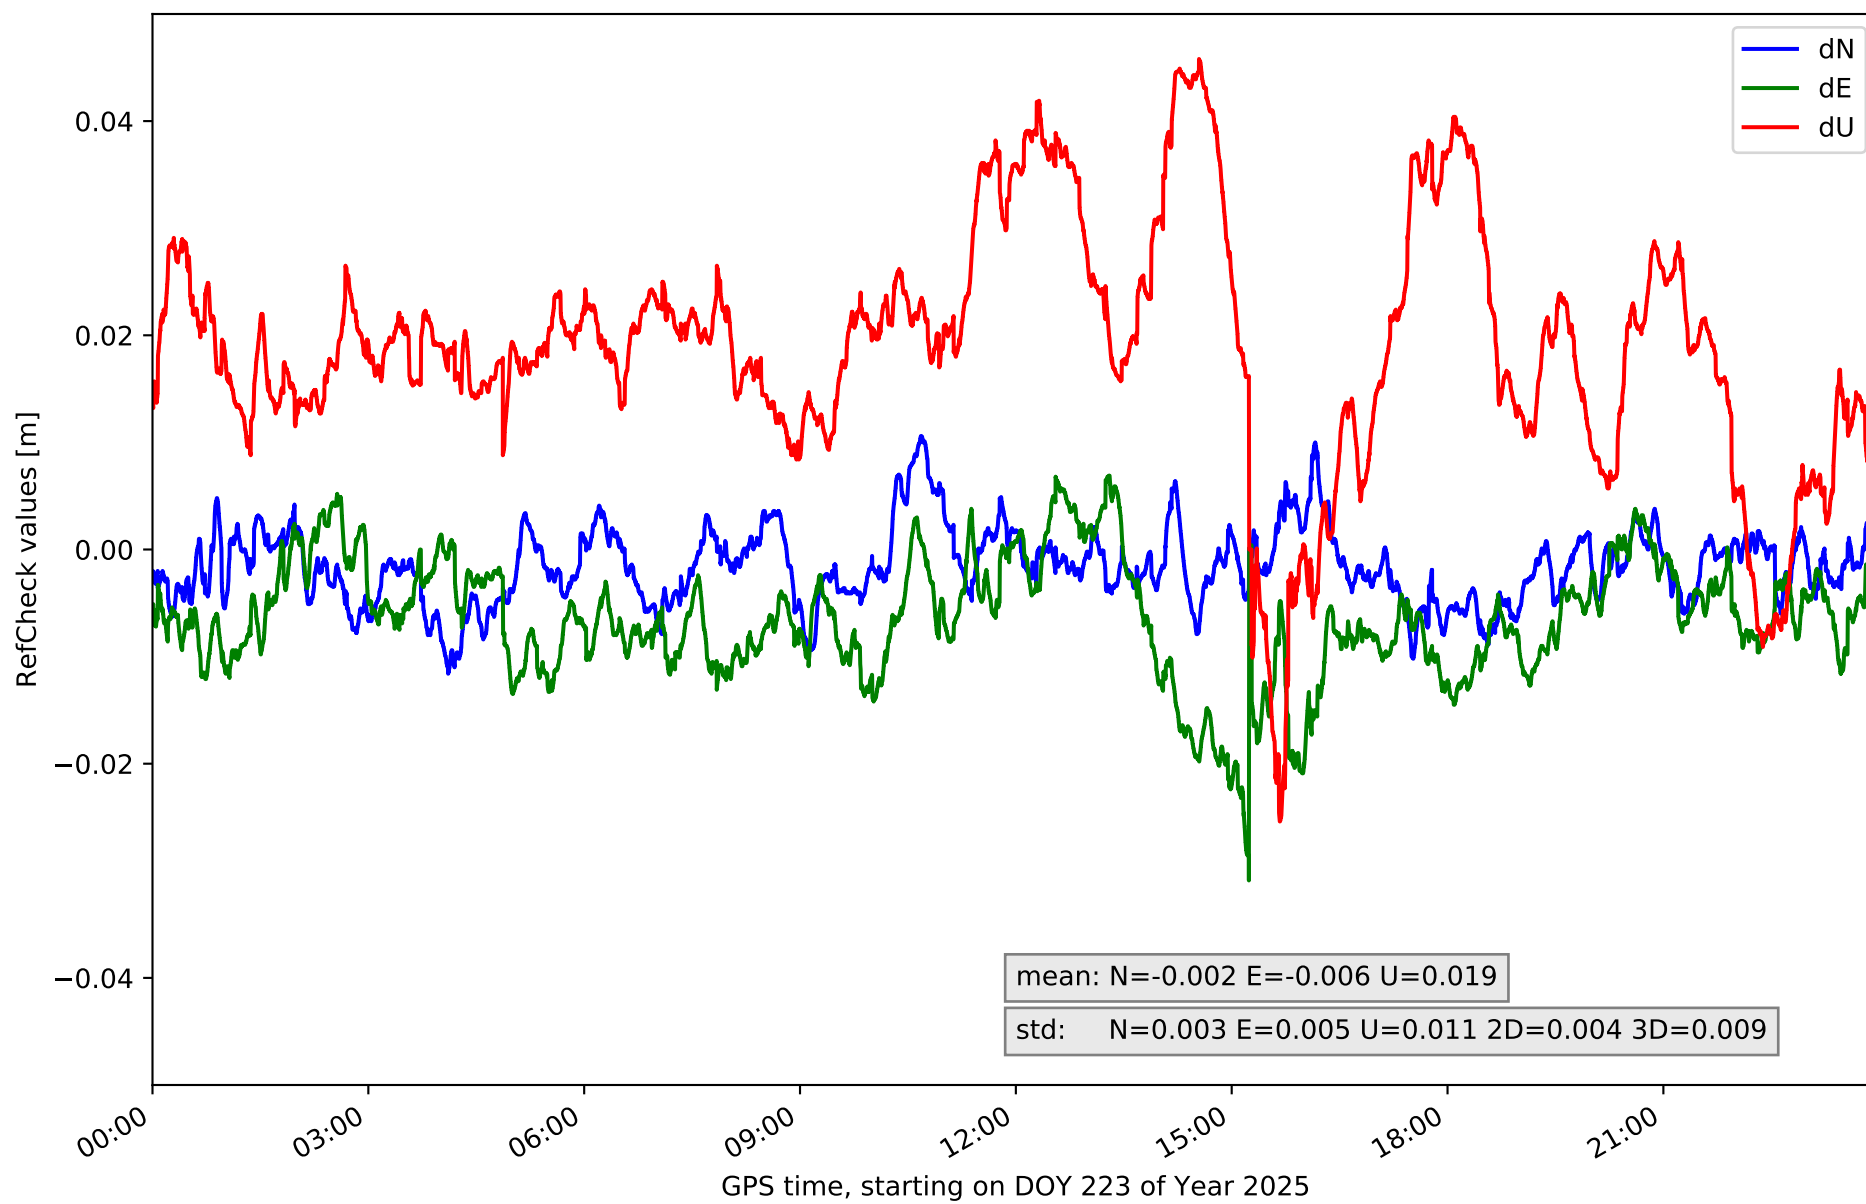


RefCheck for station TN03 in network N32T

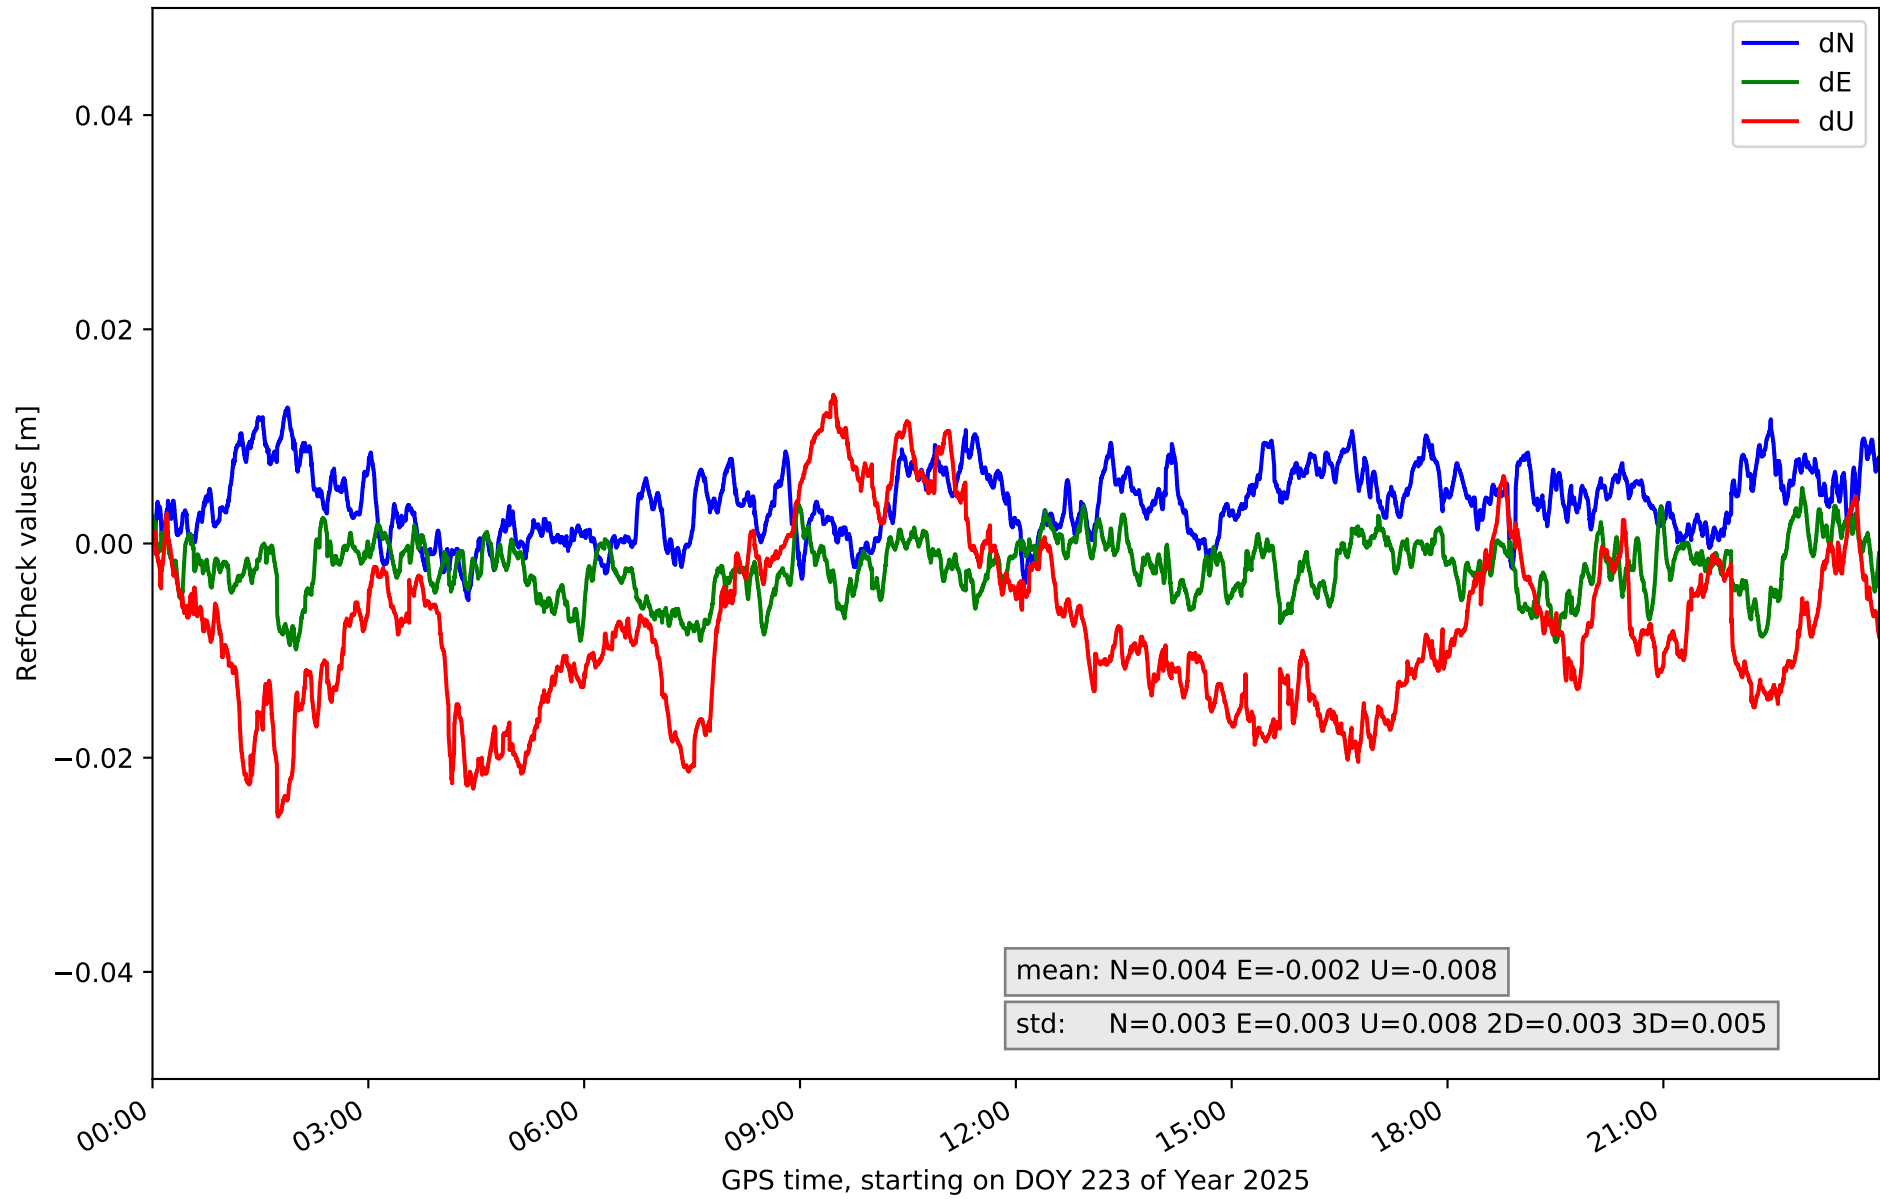


RefCheck for station TN04 in network N32T

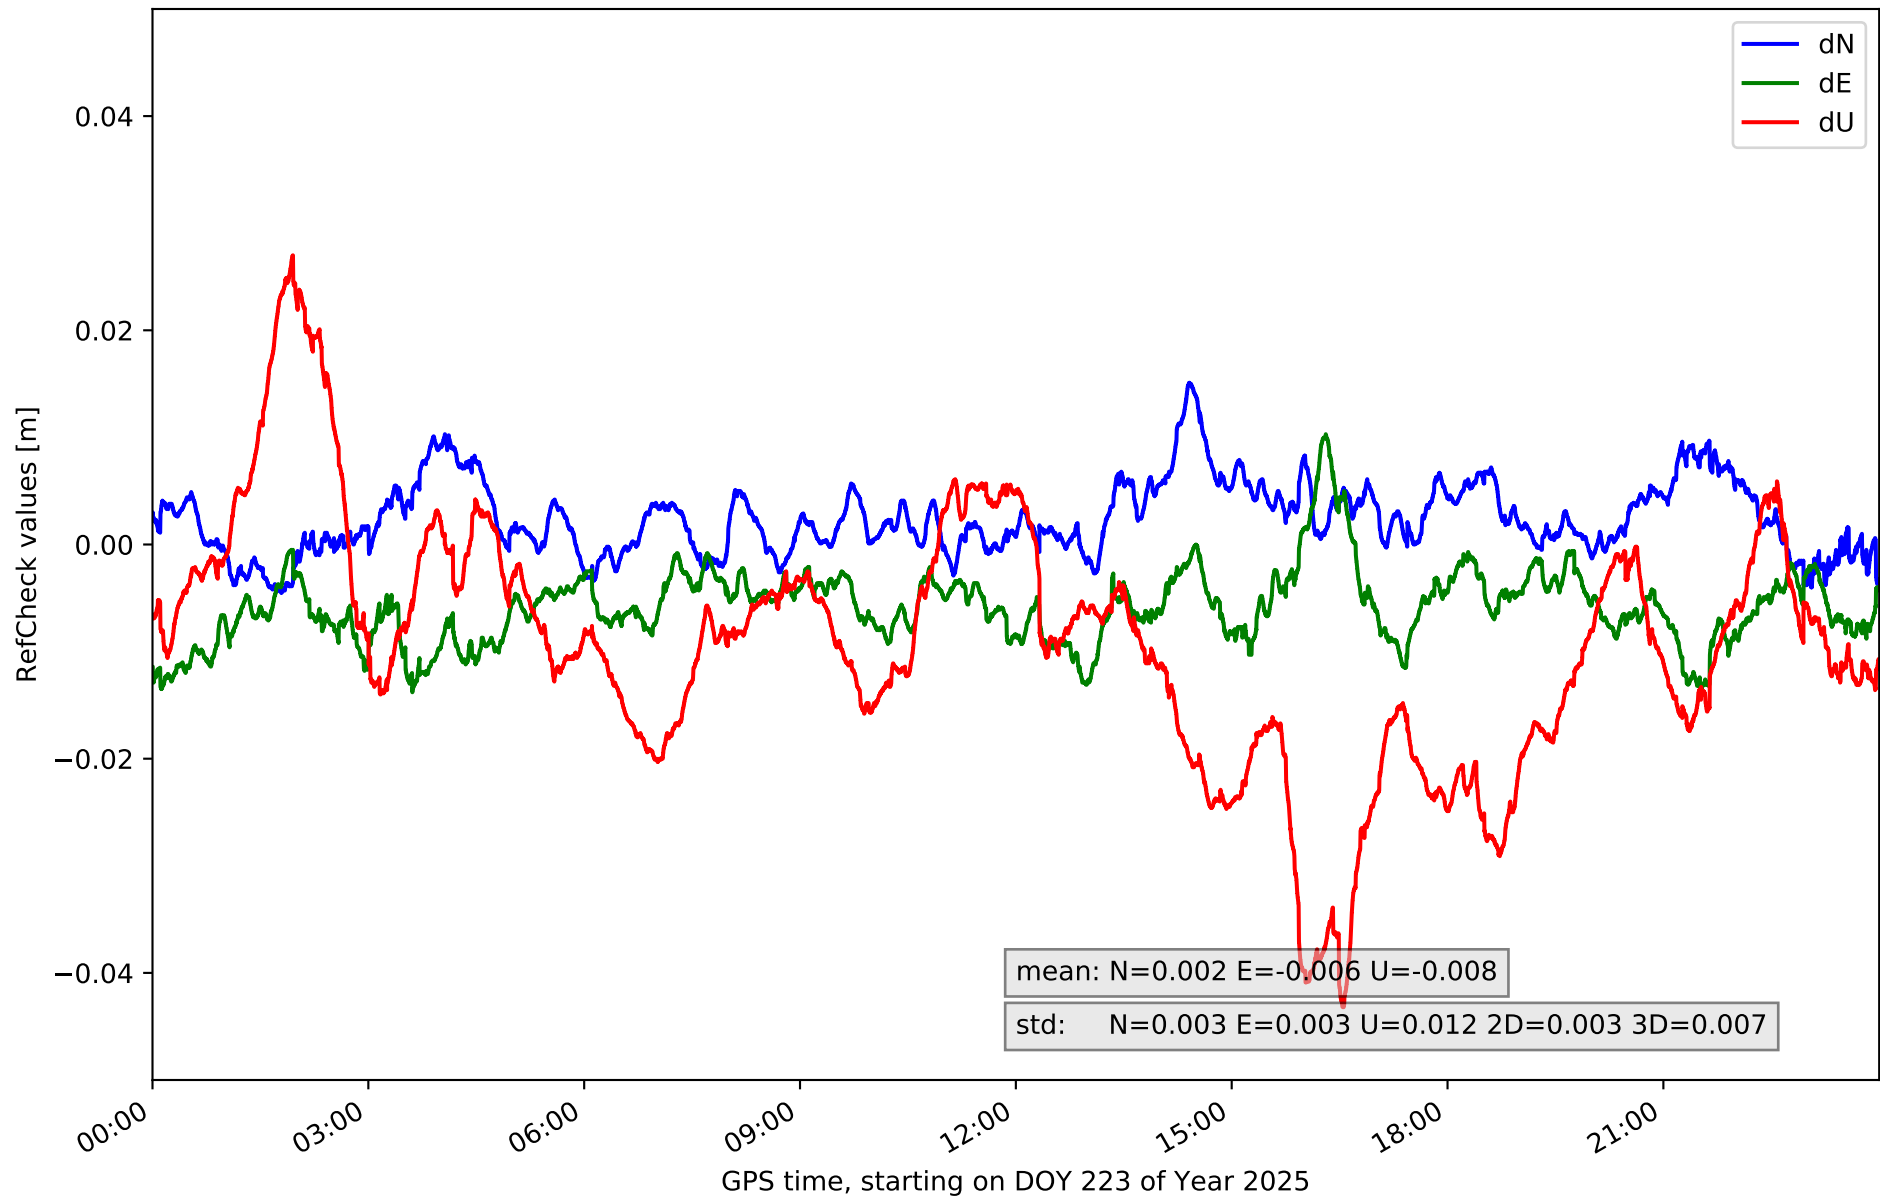


RefCheck for station TN06 in network N32T

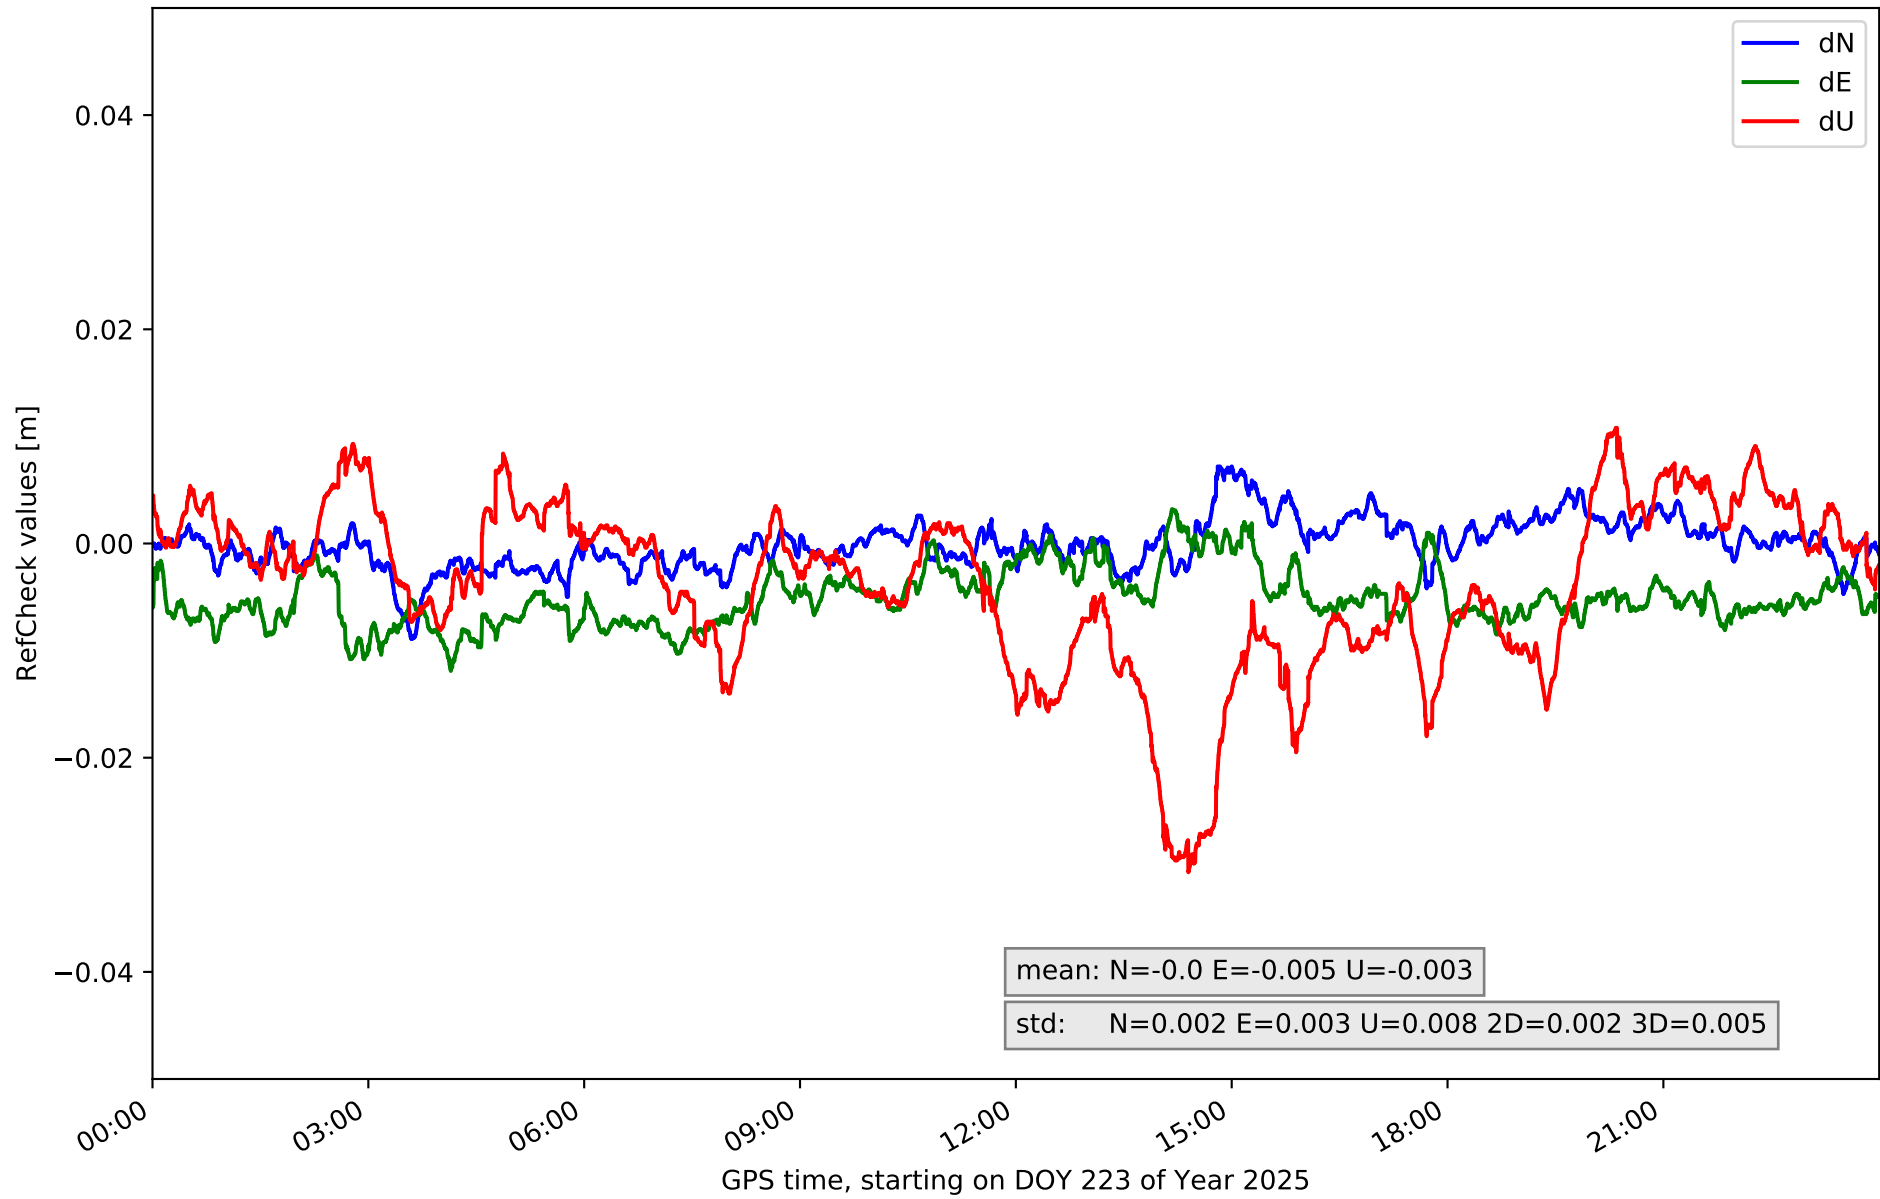

RefCheck for station TN09 in network N32T

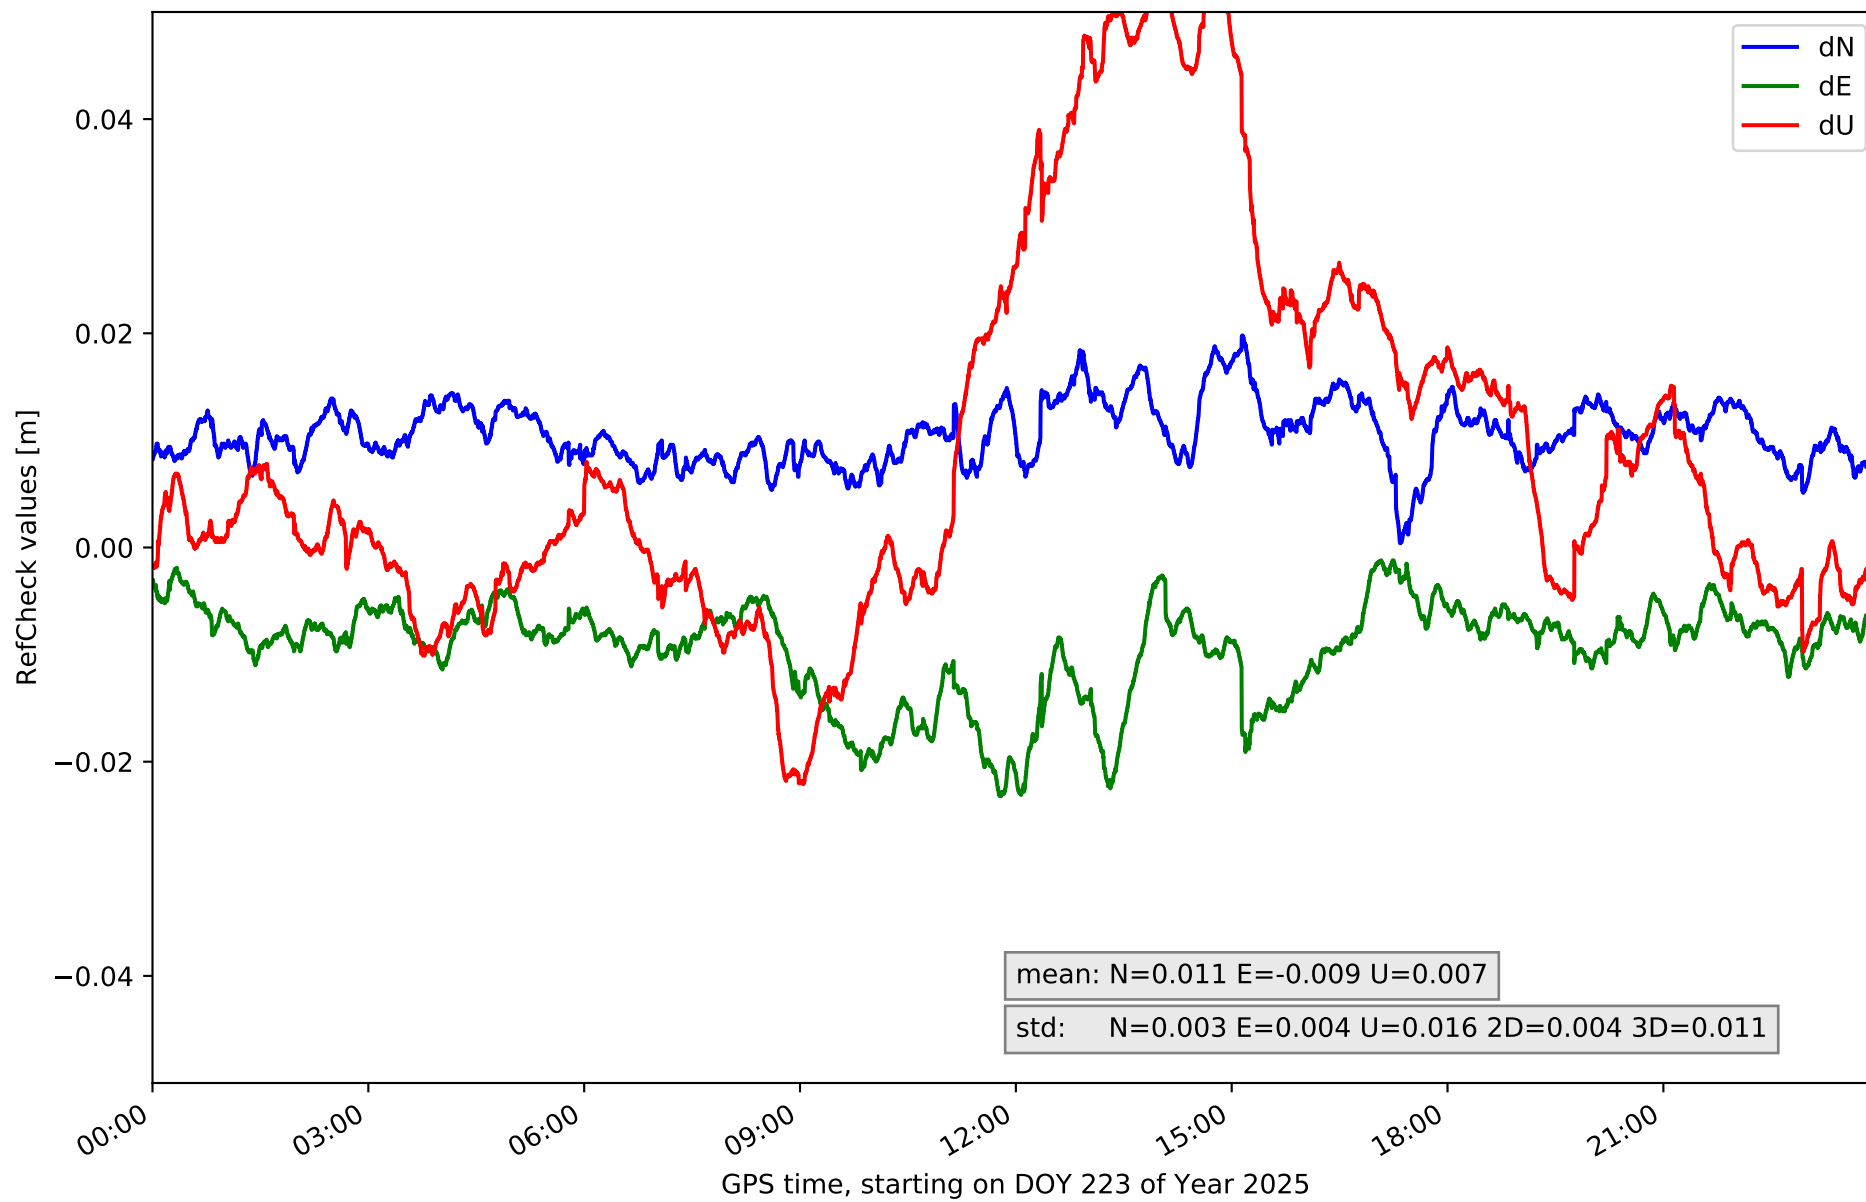

RefCheck for station TE11 in network N32T

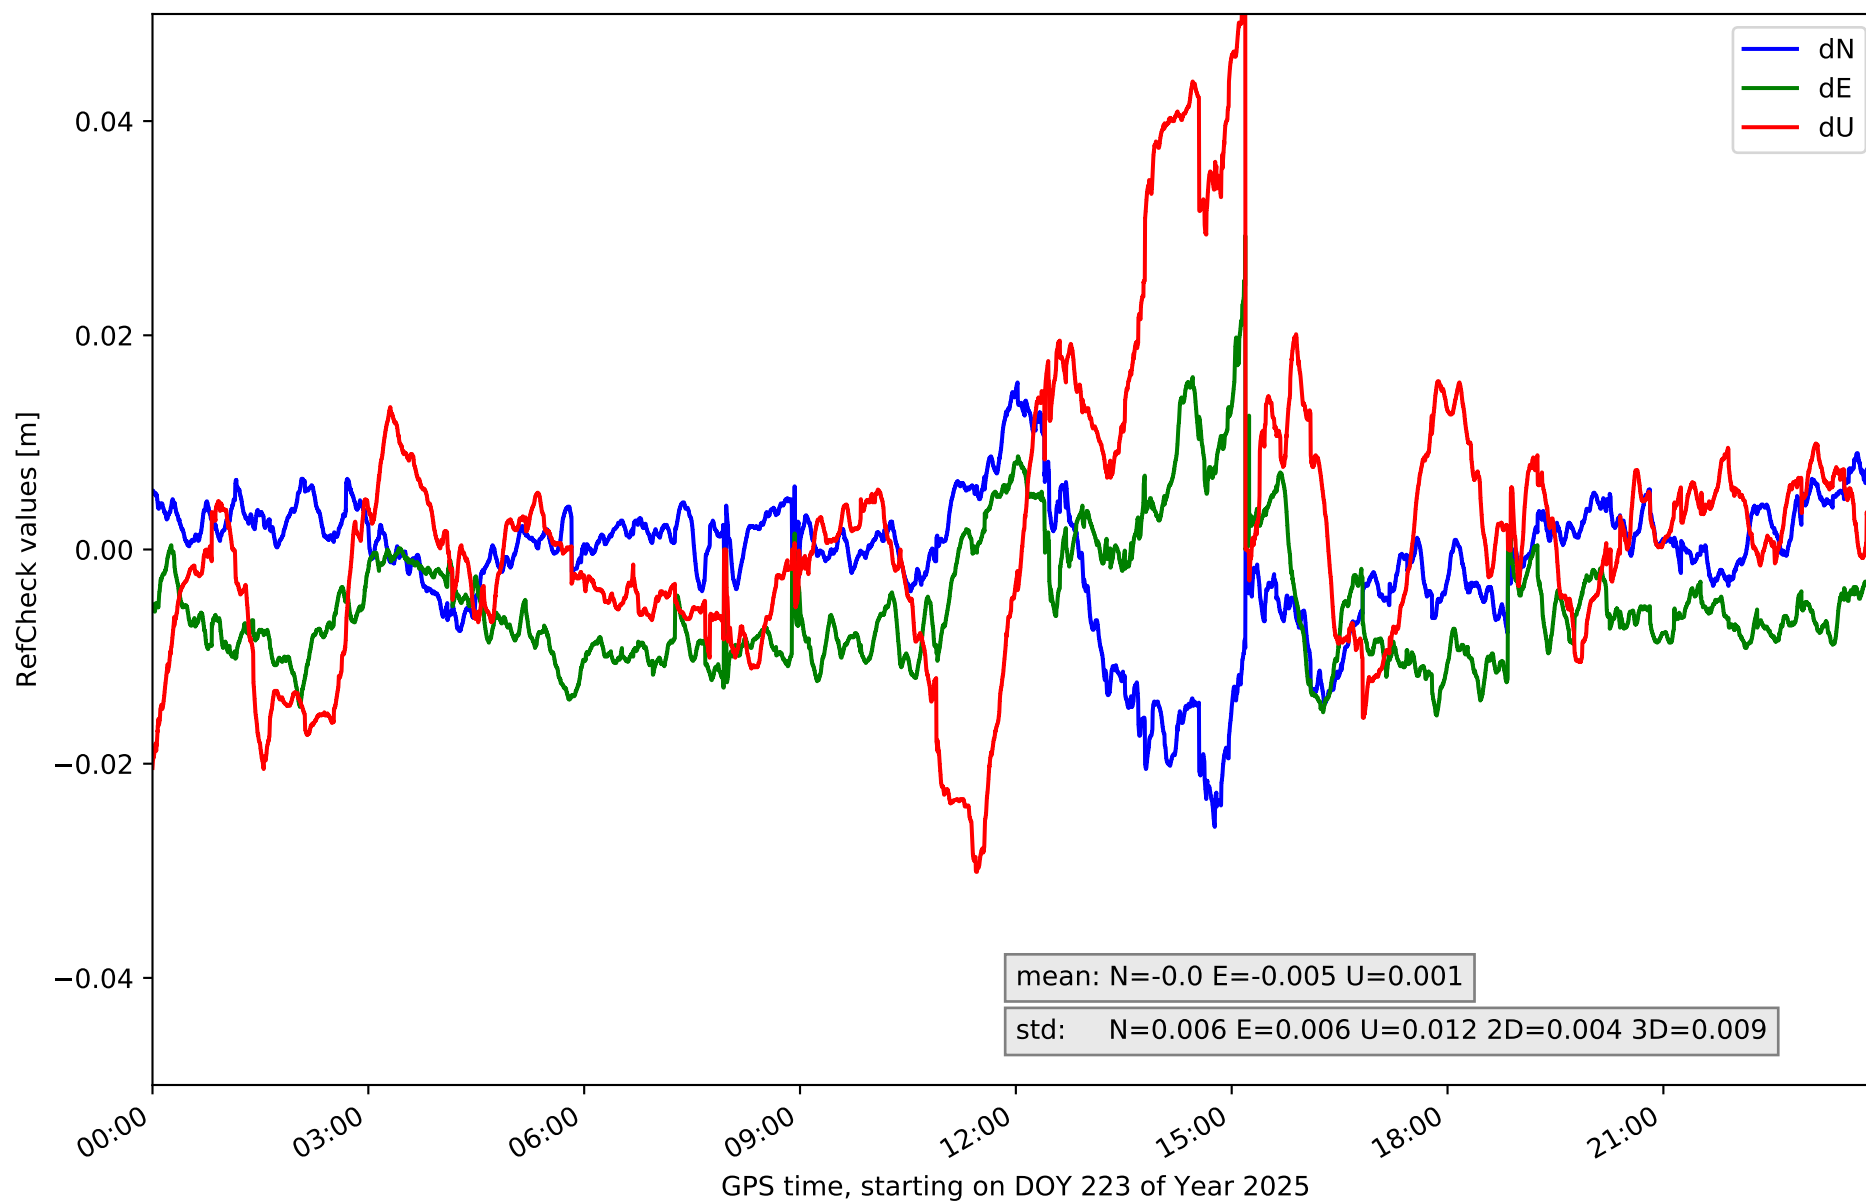

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.005	0.011	0.003	0.007	0.025	0.003	-0.019	0.021	0.008	0.003	0.004	52049	96.1	14518	26.8
EH02	-0.003	0.014	0.003	0.008	0.021	0.003	-0.009	0.026	0.007	0.003	0.004	53237	98.3	20519	37.9
GOM1	-0.014	0.004	0.003	-0.021	-0.001	0.003	-0.037	0.025	0.01	0.002	0.006	44642	82.4	9896	18.3
IZAN	-0.024	0.008	0.004	-0.019	0.014	0.005	-0.035	0.013	0.009	0.004	0.006	9563	17.7	5153	9.5
LP01	-0.015	-0.004	0.002	-0.005	0.01	0.002	-0.022	0.024	0.007	0.002	0.004	40410	74.6	7463	13.8
LP03	-0.007	0.004	0.002	-0.003	0.014	0.003	-0.022	0.017	0.007	0.003	0.004	1511	2.8	287	0.5
LPAL	-0.015	-0.0	0.002	0.004	0.016	0.002	-0.02	0.007	0.006	0.003	0.002	49918	92.2	2605	4.8
LRES	0.0	0.016	0.003	0.005	0.025	0.003	-0.031	0.008	0.006	0.003	0.004	53029	97.9	25024	46.2
TN01	-0.012	0.007	0.003	-0.017	0.001	0.003	-0.043	0.012	0.01	0.003	0.008	13215	24.4	13904	25.7
TN02	-0.012	0.011	0.003	-0.031	0.007	0.005	-0.025	0.046	0.011	0.004	0.009	13719	25.3	29132	53.8
TN03	-0.005	0.013	0.003	-0.01	0.005	0.003	-0.025	0.014	0.008	0.003	0.005	3400	6.3	4184	7.7
TN04	-0.004	0.015	0.003	-0.014	0.01	0.003	-0.043	0.027	0.012	0.003	0.007	10646	19.7	11465	21.2
TN06	-0.009	0.007	0.002	-0.012	0.003	0.003	-0.031	0.011	0.008	0.002	0.005	1630	3.0	1682	3.1
TN09	0.0	0.02	0.003	-0.023	-0.001	0.004	-0.022	0.059	0.016	0.004	0.011	50685	93.6	16619	30.7
TE11	-0.026	0.016	0.006	-0.015	0.029	0.006	-0.03	0.056	0.012	0.004	0.009	15466	28.6	6549	12.1
Mean	-0.01	0.009	0.003	-0.01	0.012	0.003	-0.028	0.024	0.009	0.003	0.006	27541.3	50.9	11266.7	20.8
Min/Max	-0.026	0.02	0.006	-0.031	0.029	0.006	-0.043	0.059	0.016	0.004	0.011	53237	98.3	29132	53.8

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	94.4	94.5	93.8	95.2	93.9
considering satellites with dual-frequency fixed	92.6	93.7	89.2	93.6	92.3
considering all signals separately	92.6	93.8	89.2	94.0	90.4