

summary for network N32T

timeperiod chosen: from 2025-08-13-00:00:00 until 2025-08-13-23:59:58

average update rate (durations larger than 15 seconds considered as observation gap): 1.6 seconds


average fixing percentage with threshold set to 0.3: 93.2 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

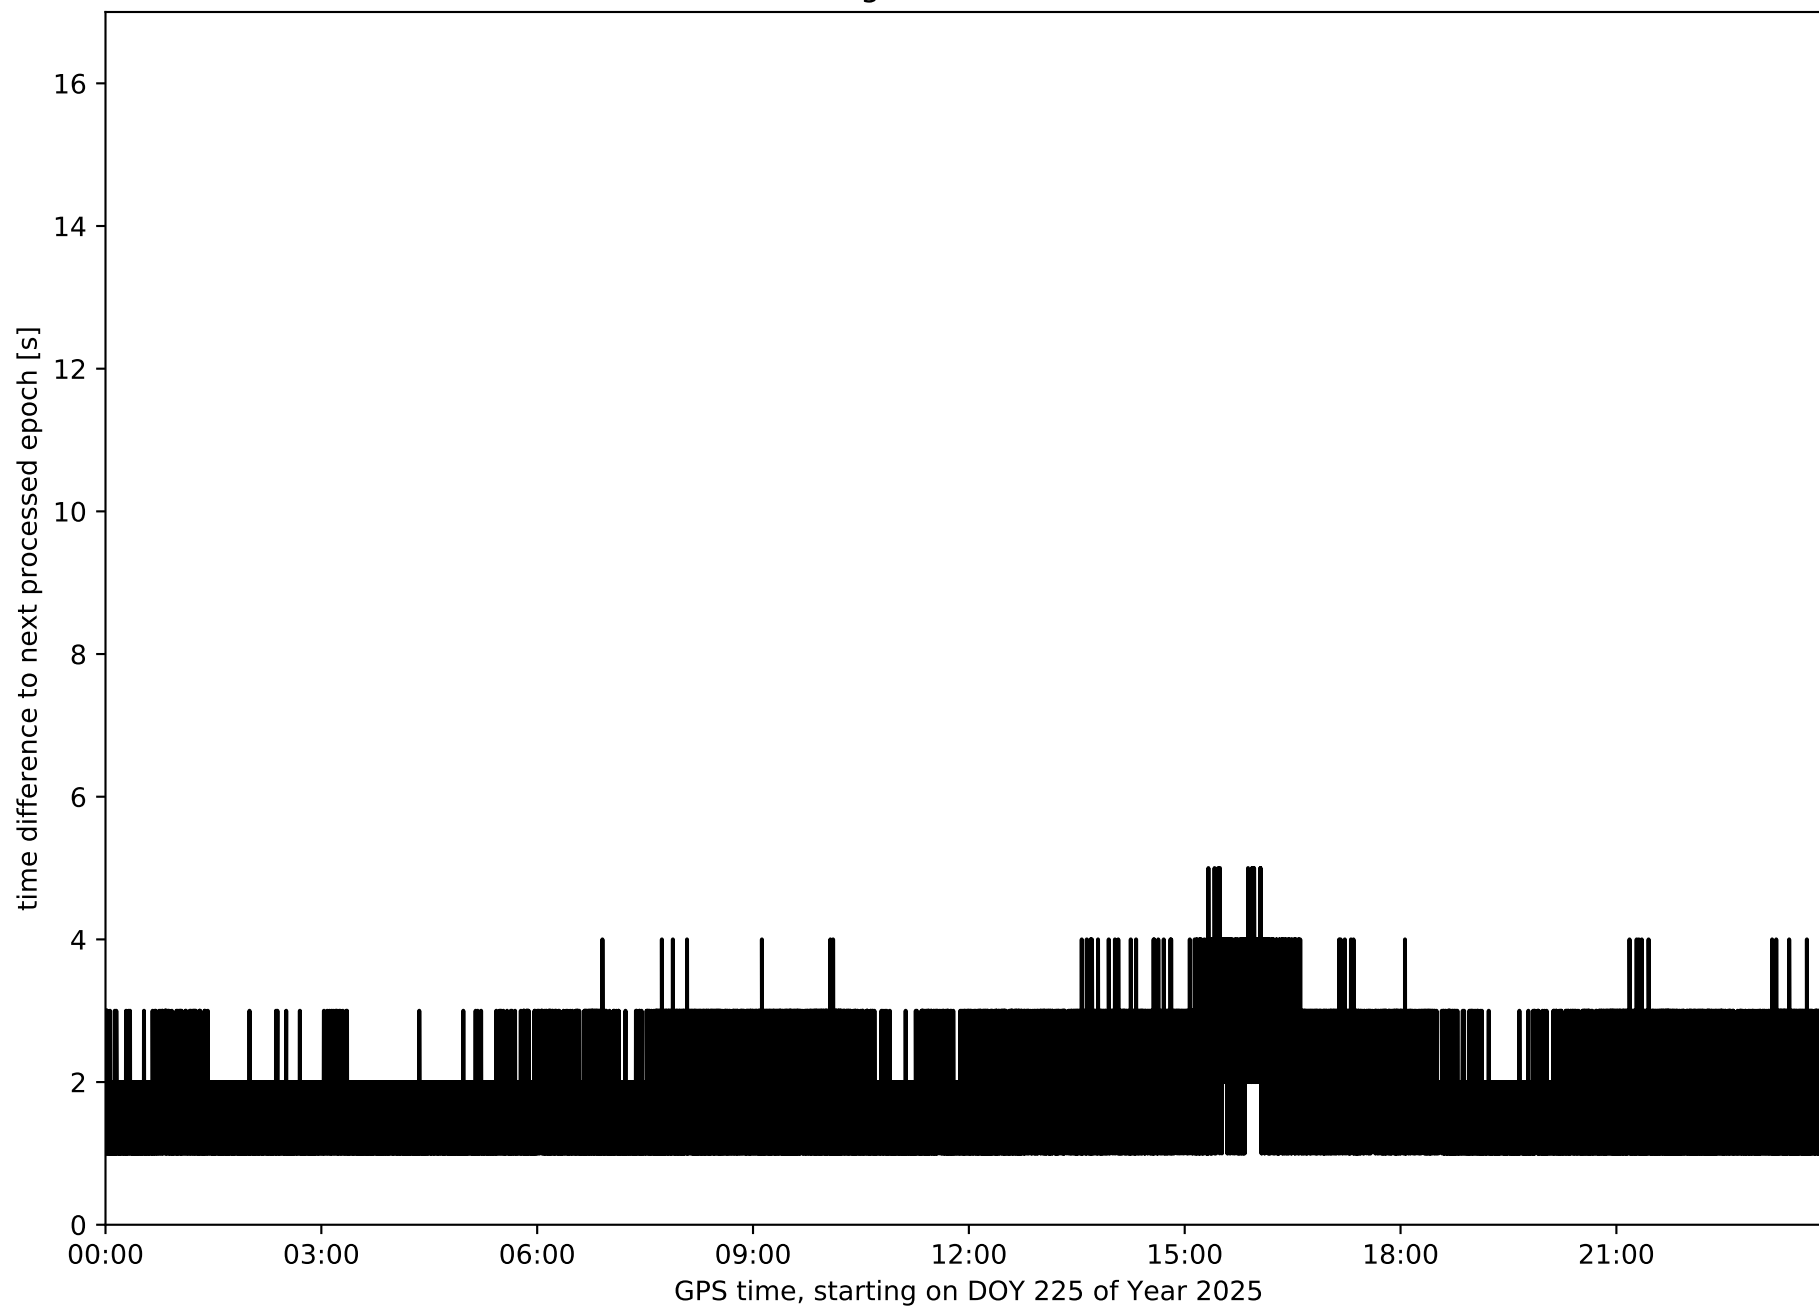


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

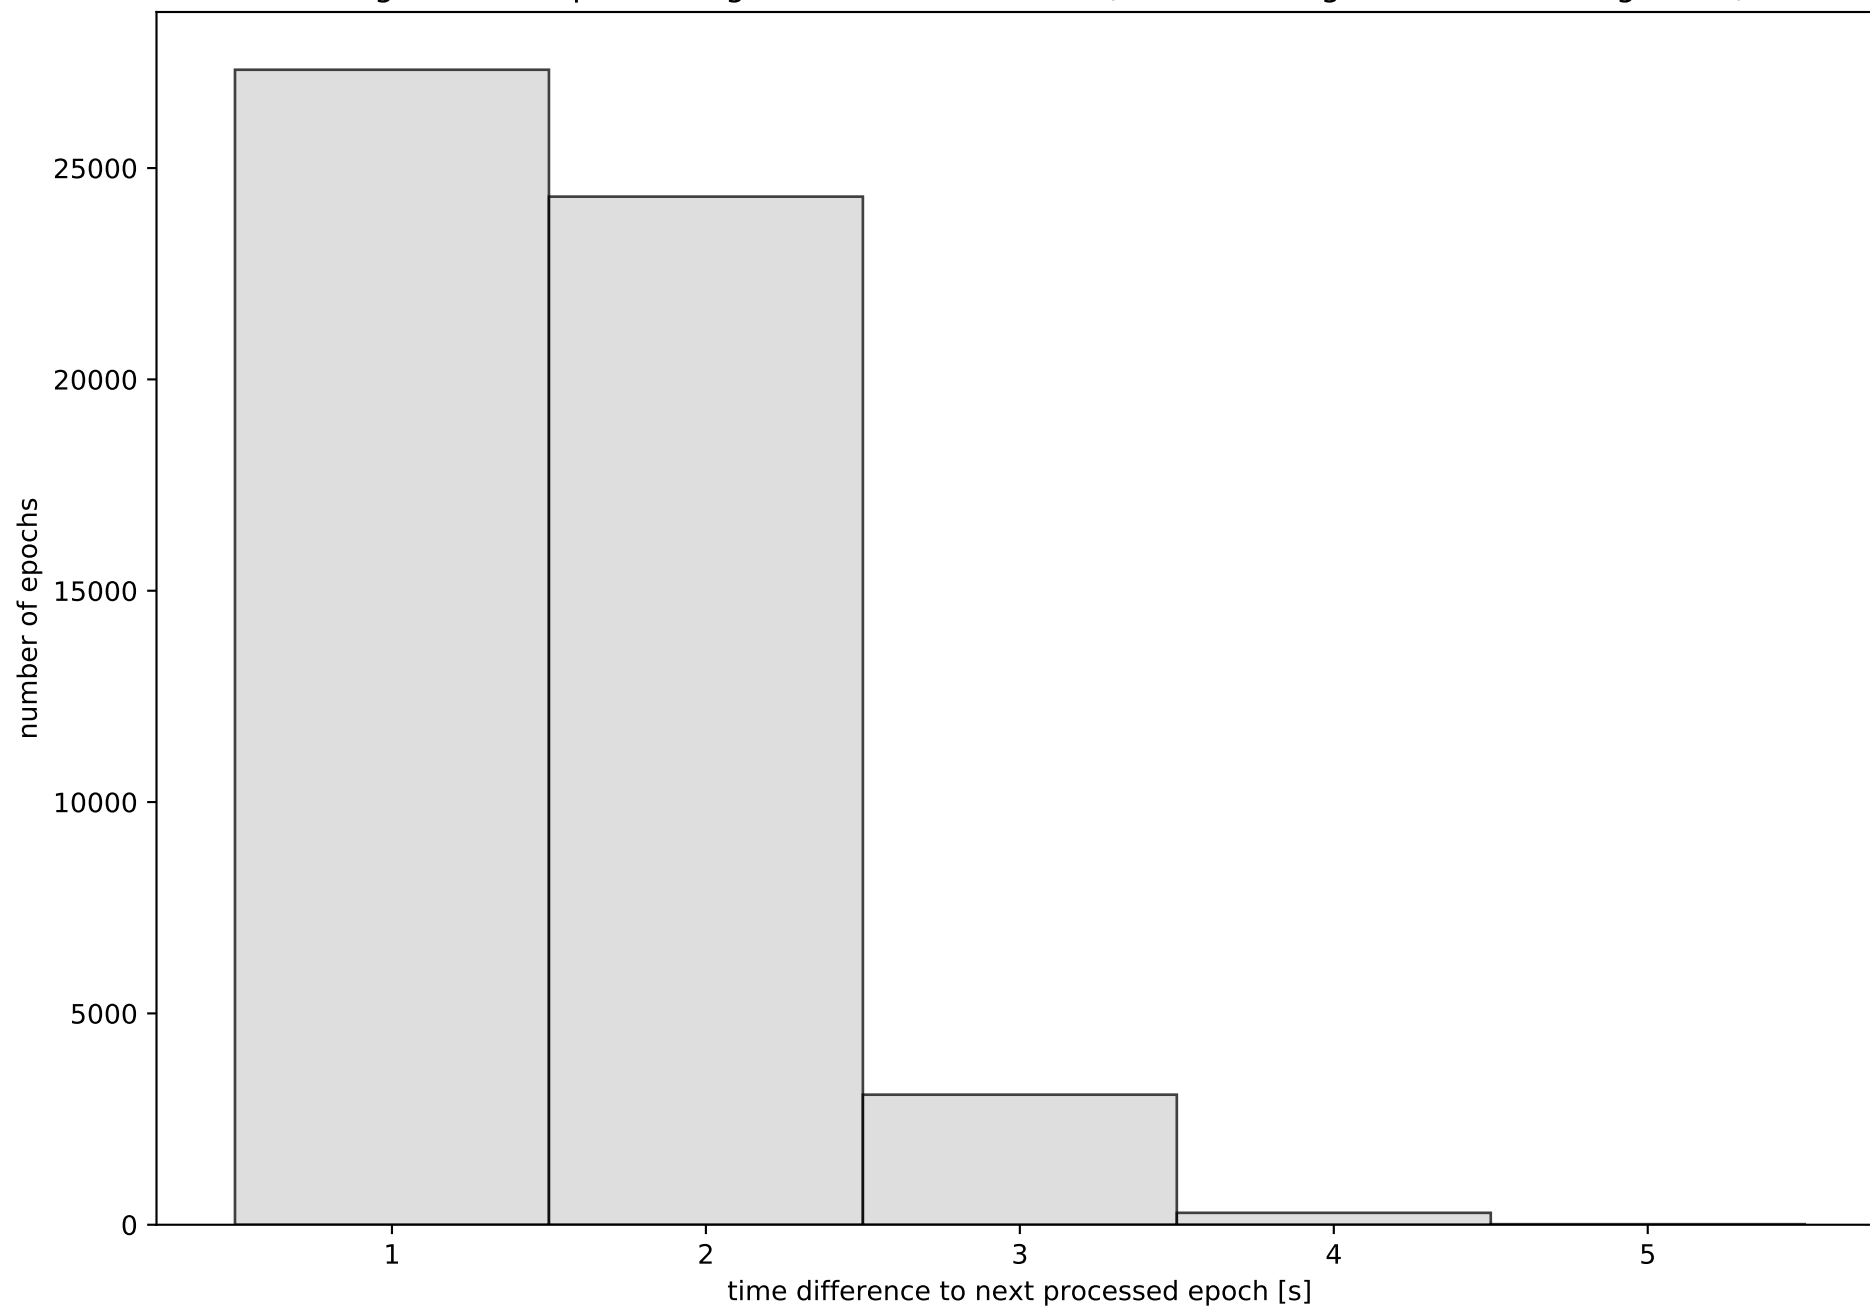


Network N32T with threshold set to 0.3

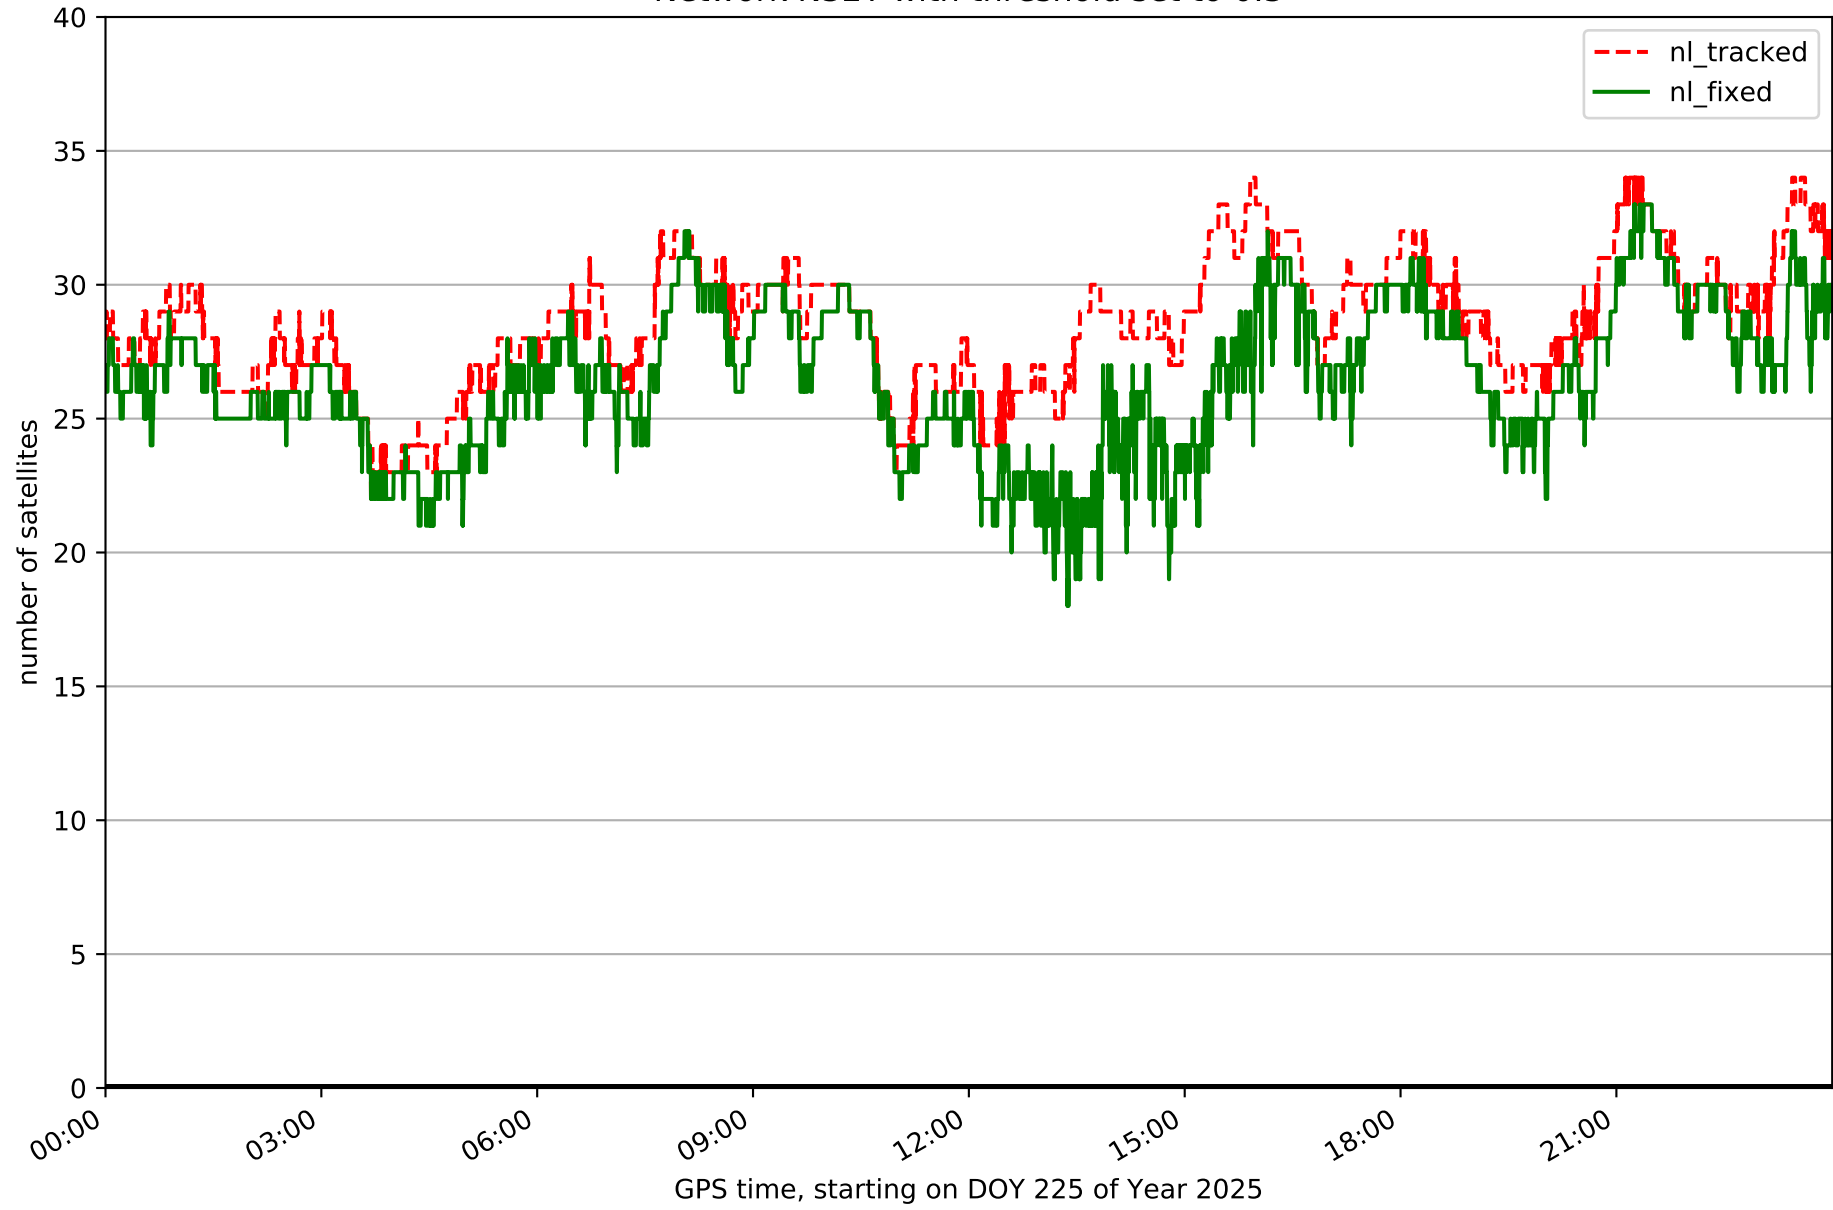


Fixing percentage of satellites in network N32T with threshold set to 0.3

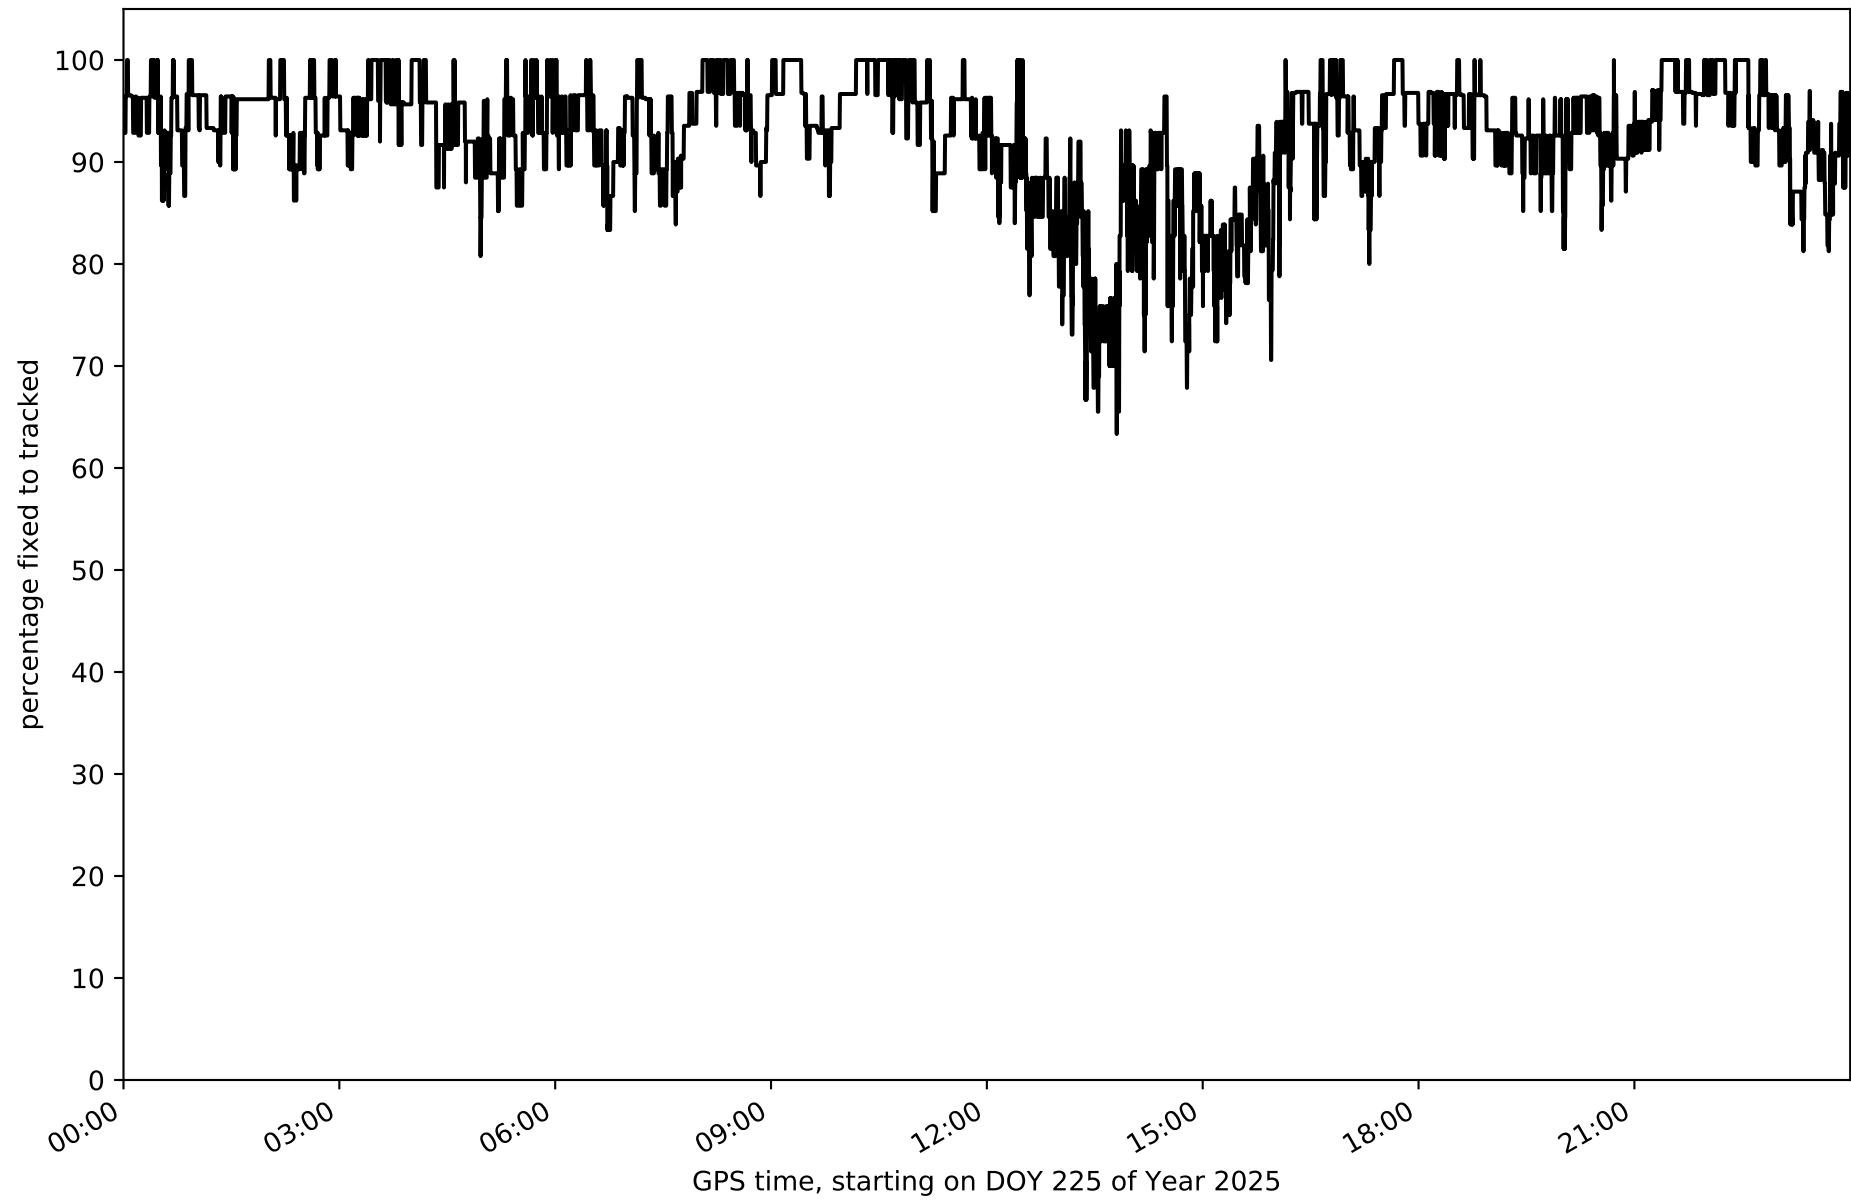


Network N32T - only GPS with threshold set to 0.3

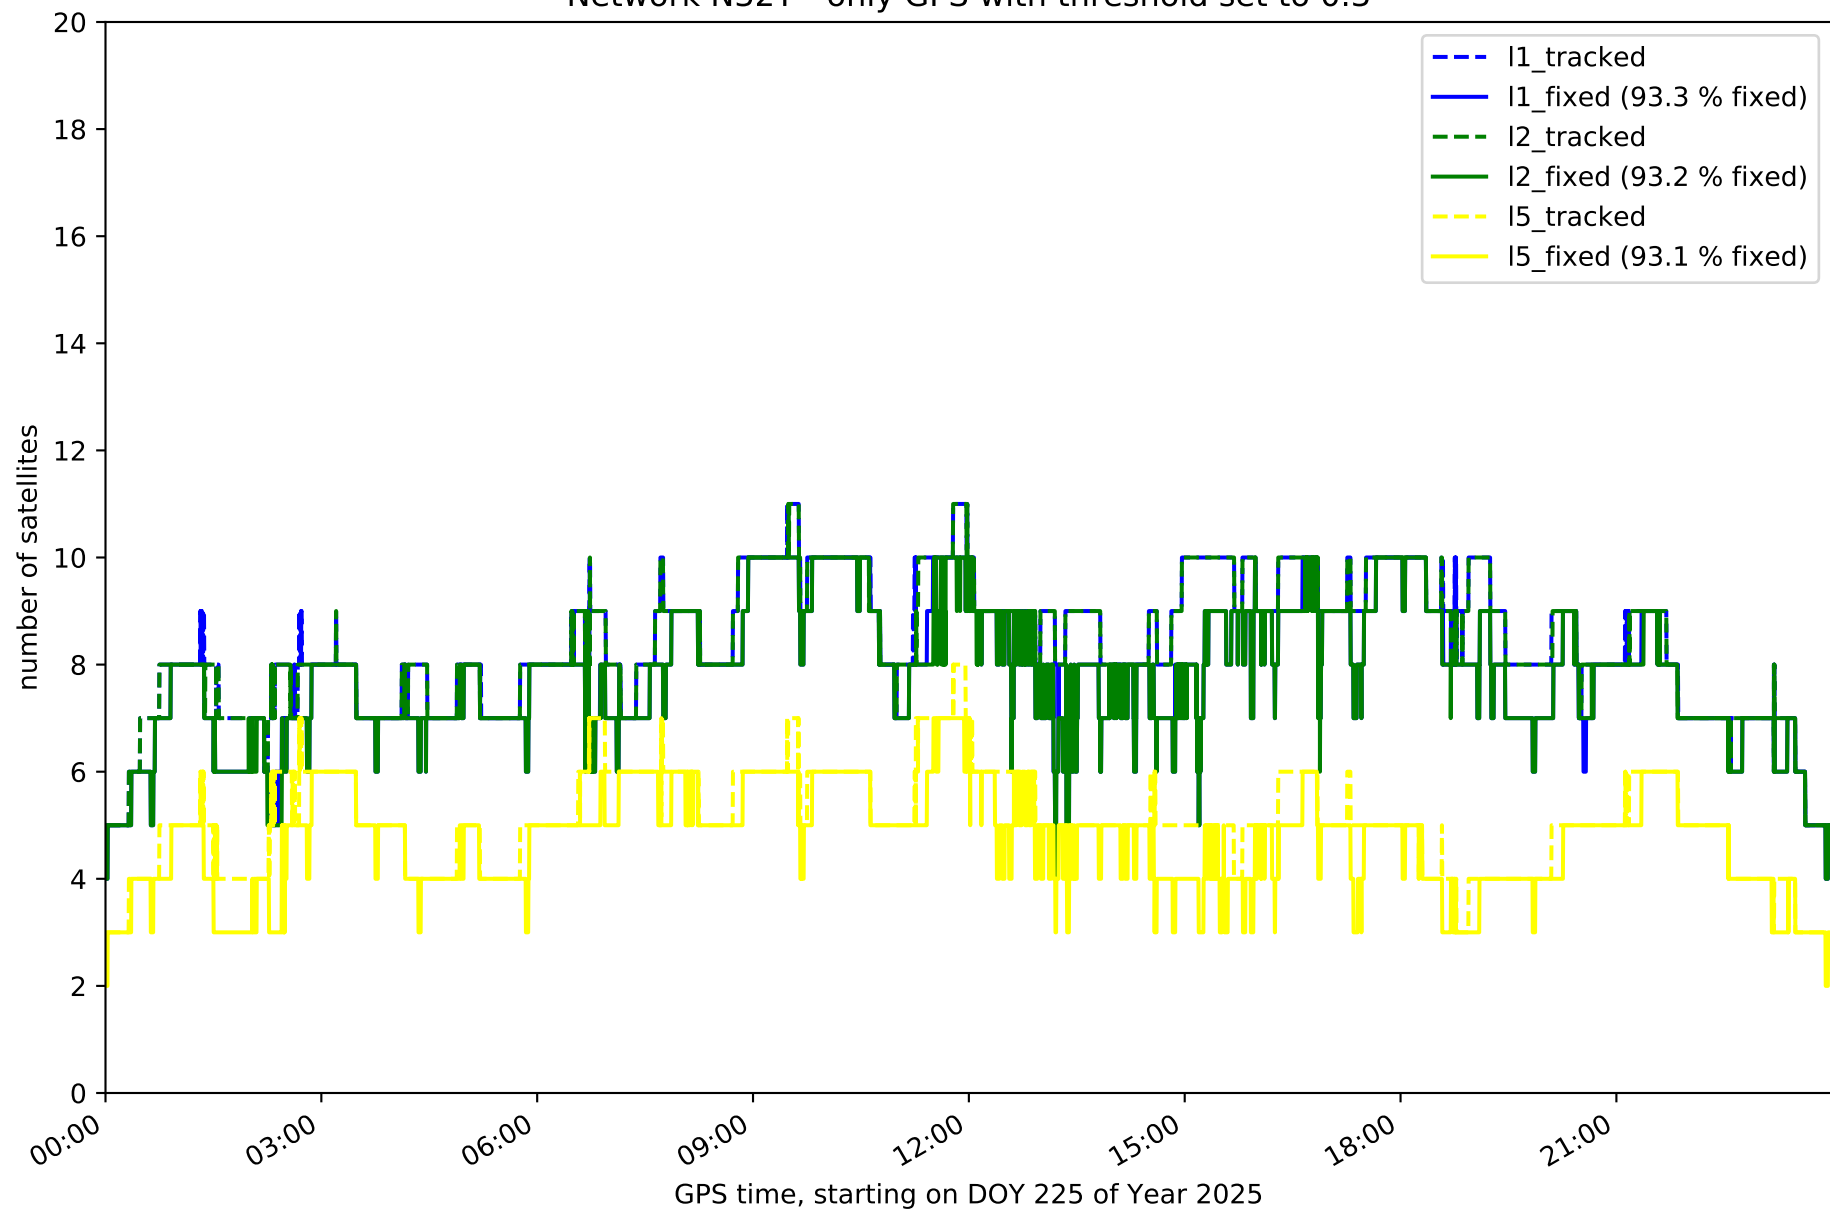


Network N32T - only GLONASS with threshold set to 0.3

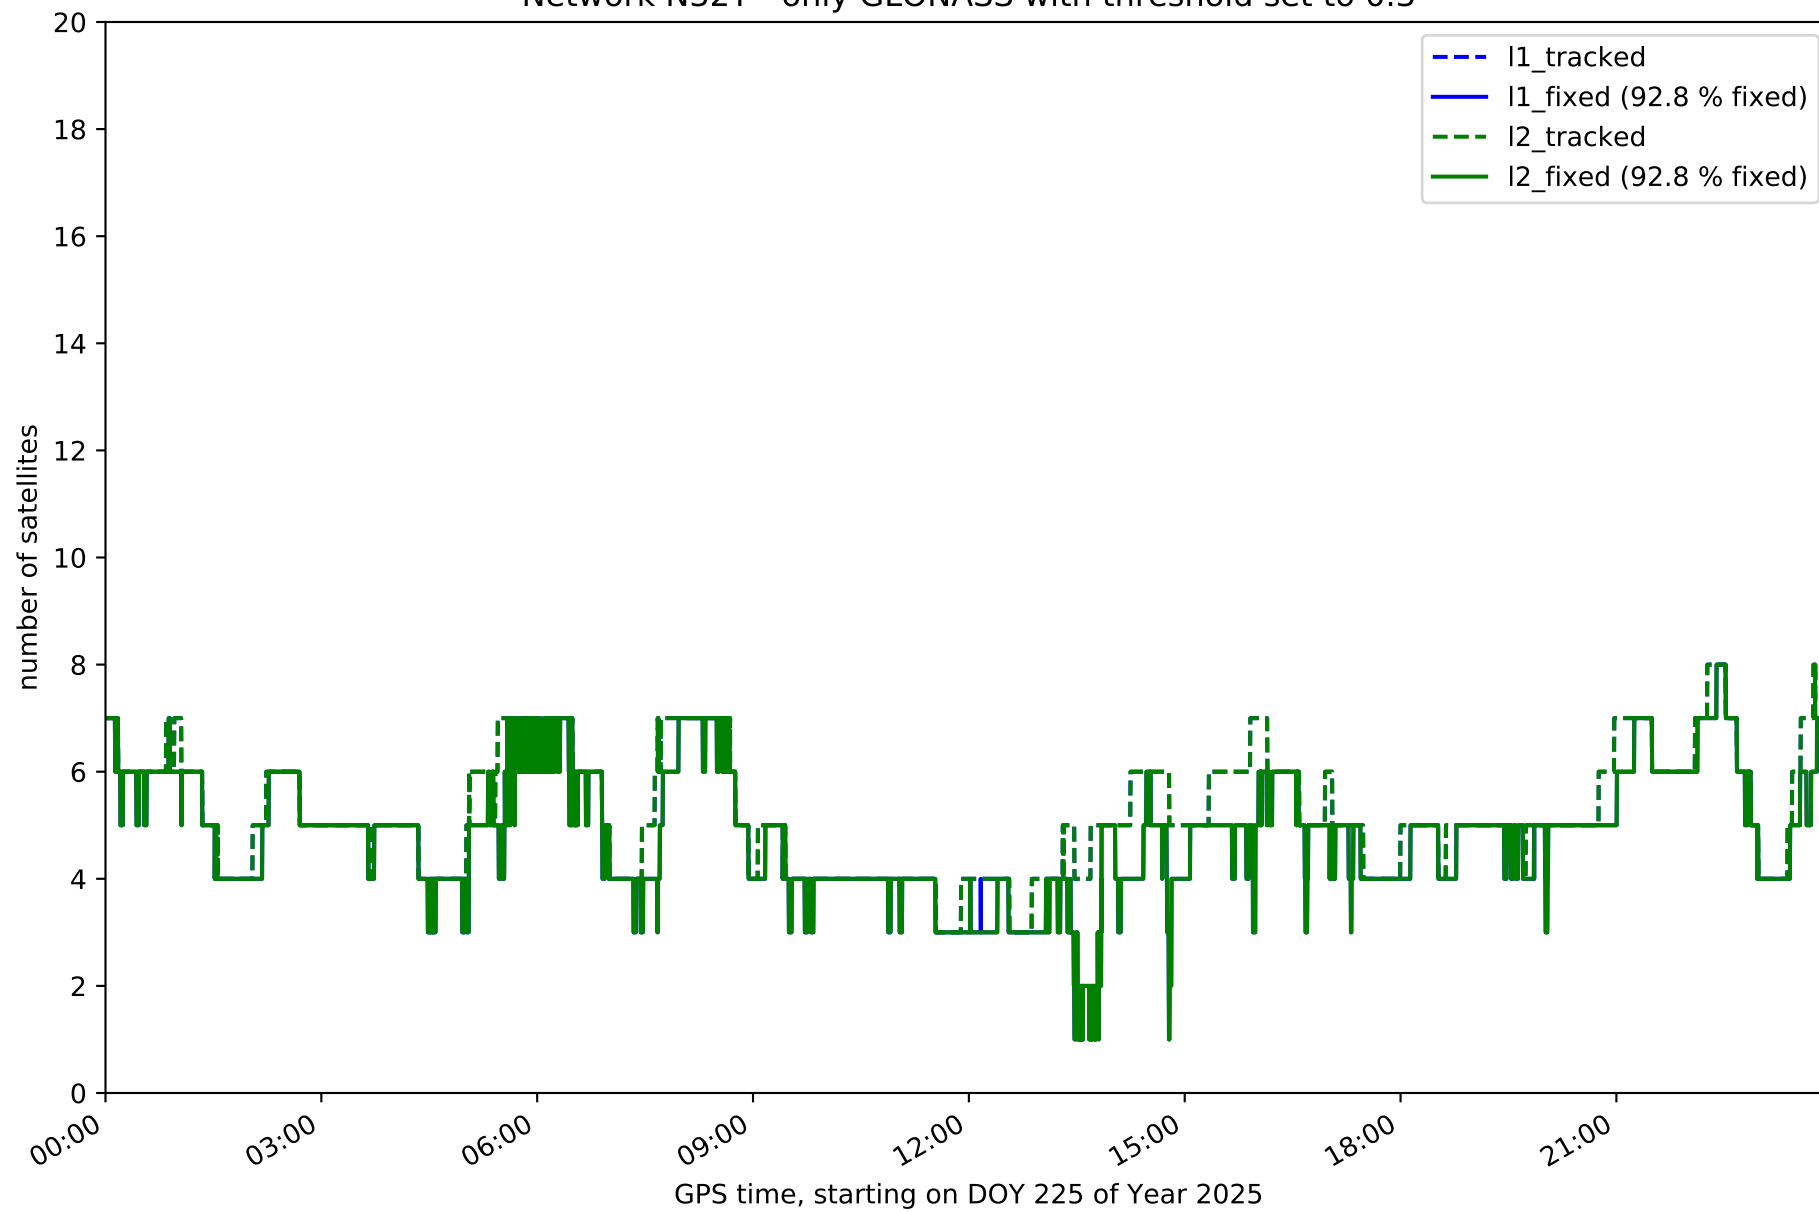


Network N32T - only BDS with threshold set to 0.3

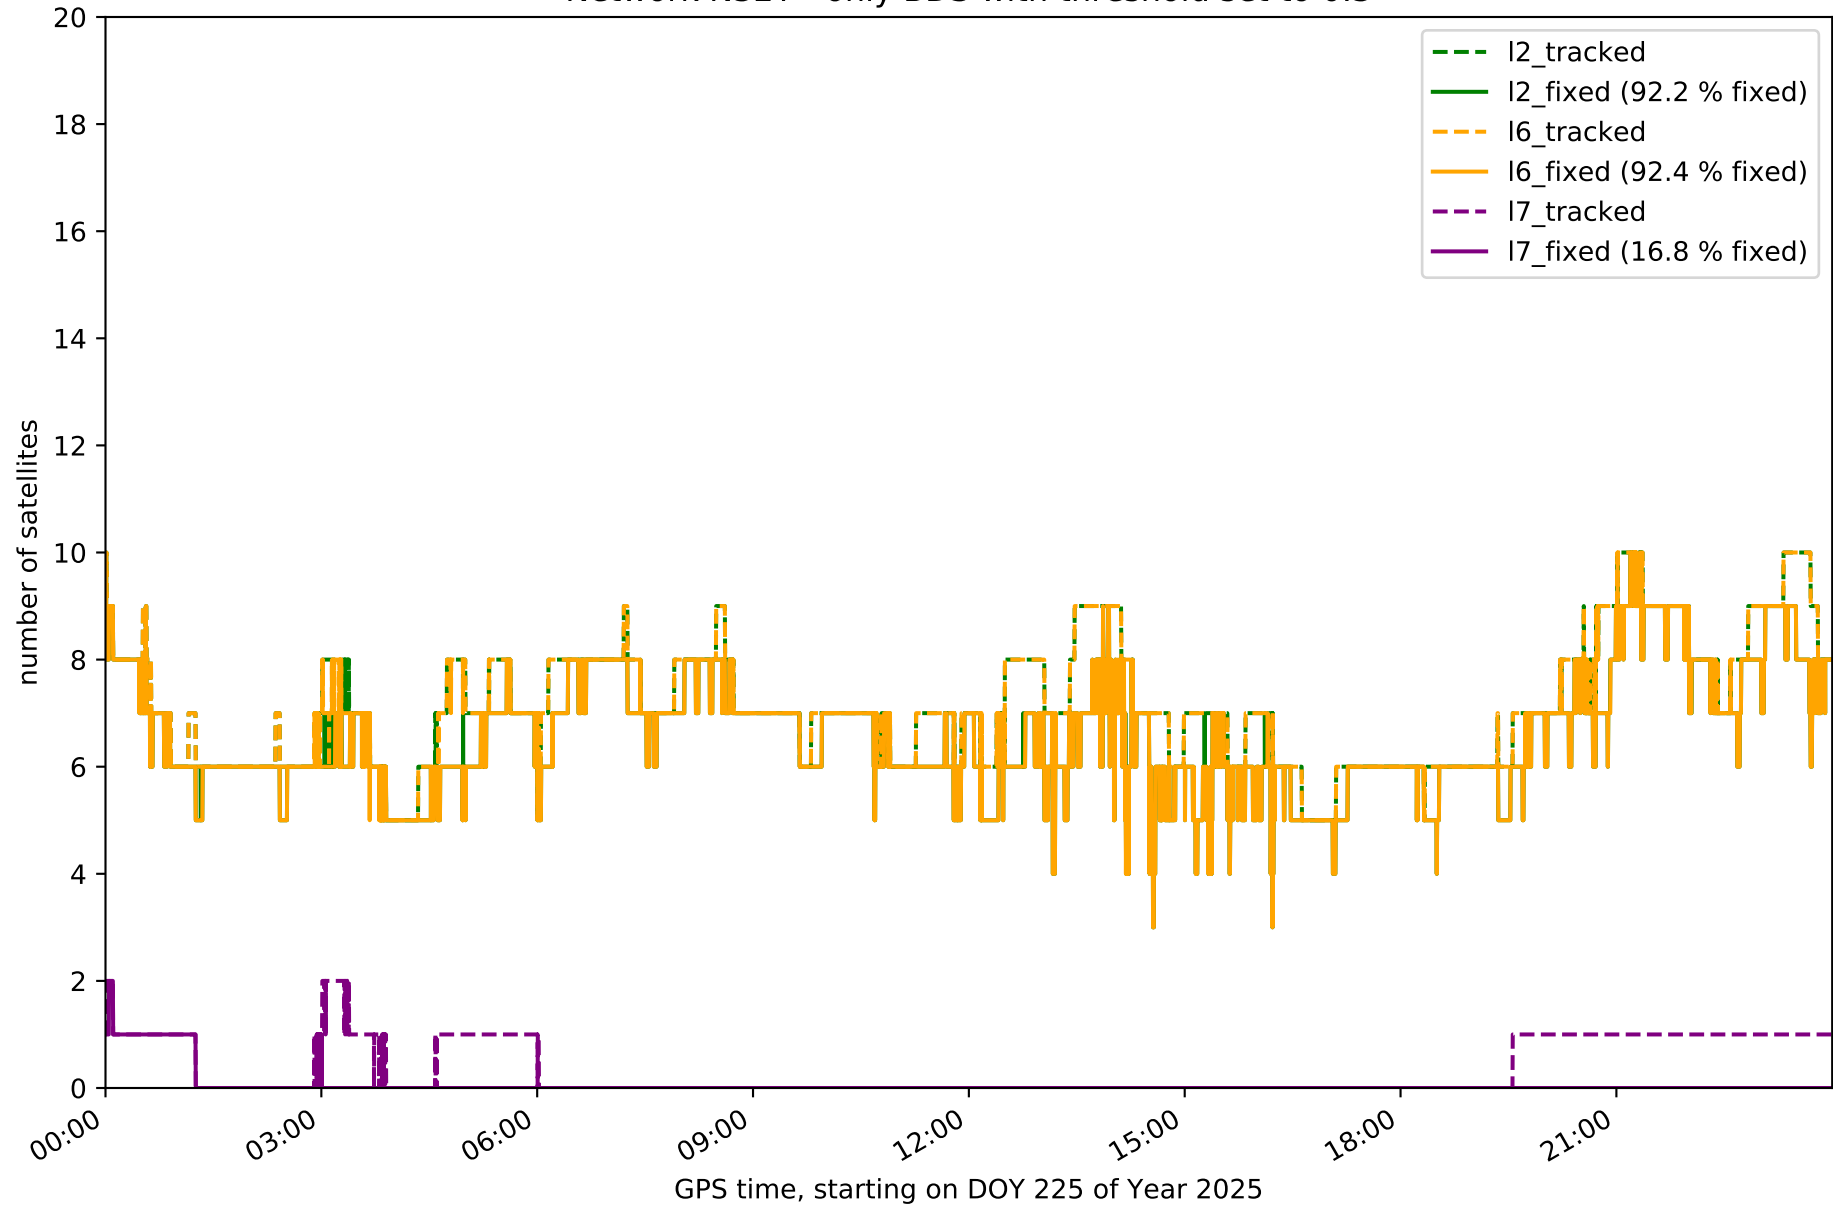


Network N32T - only Galileo with threshold set to 0.3

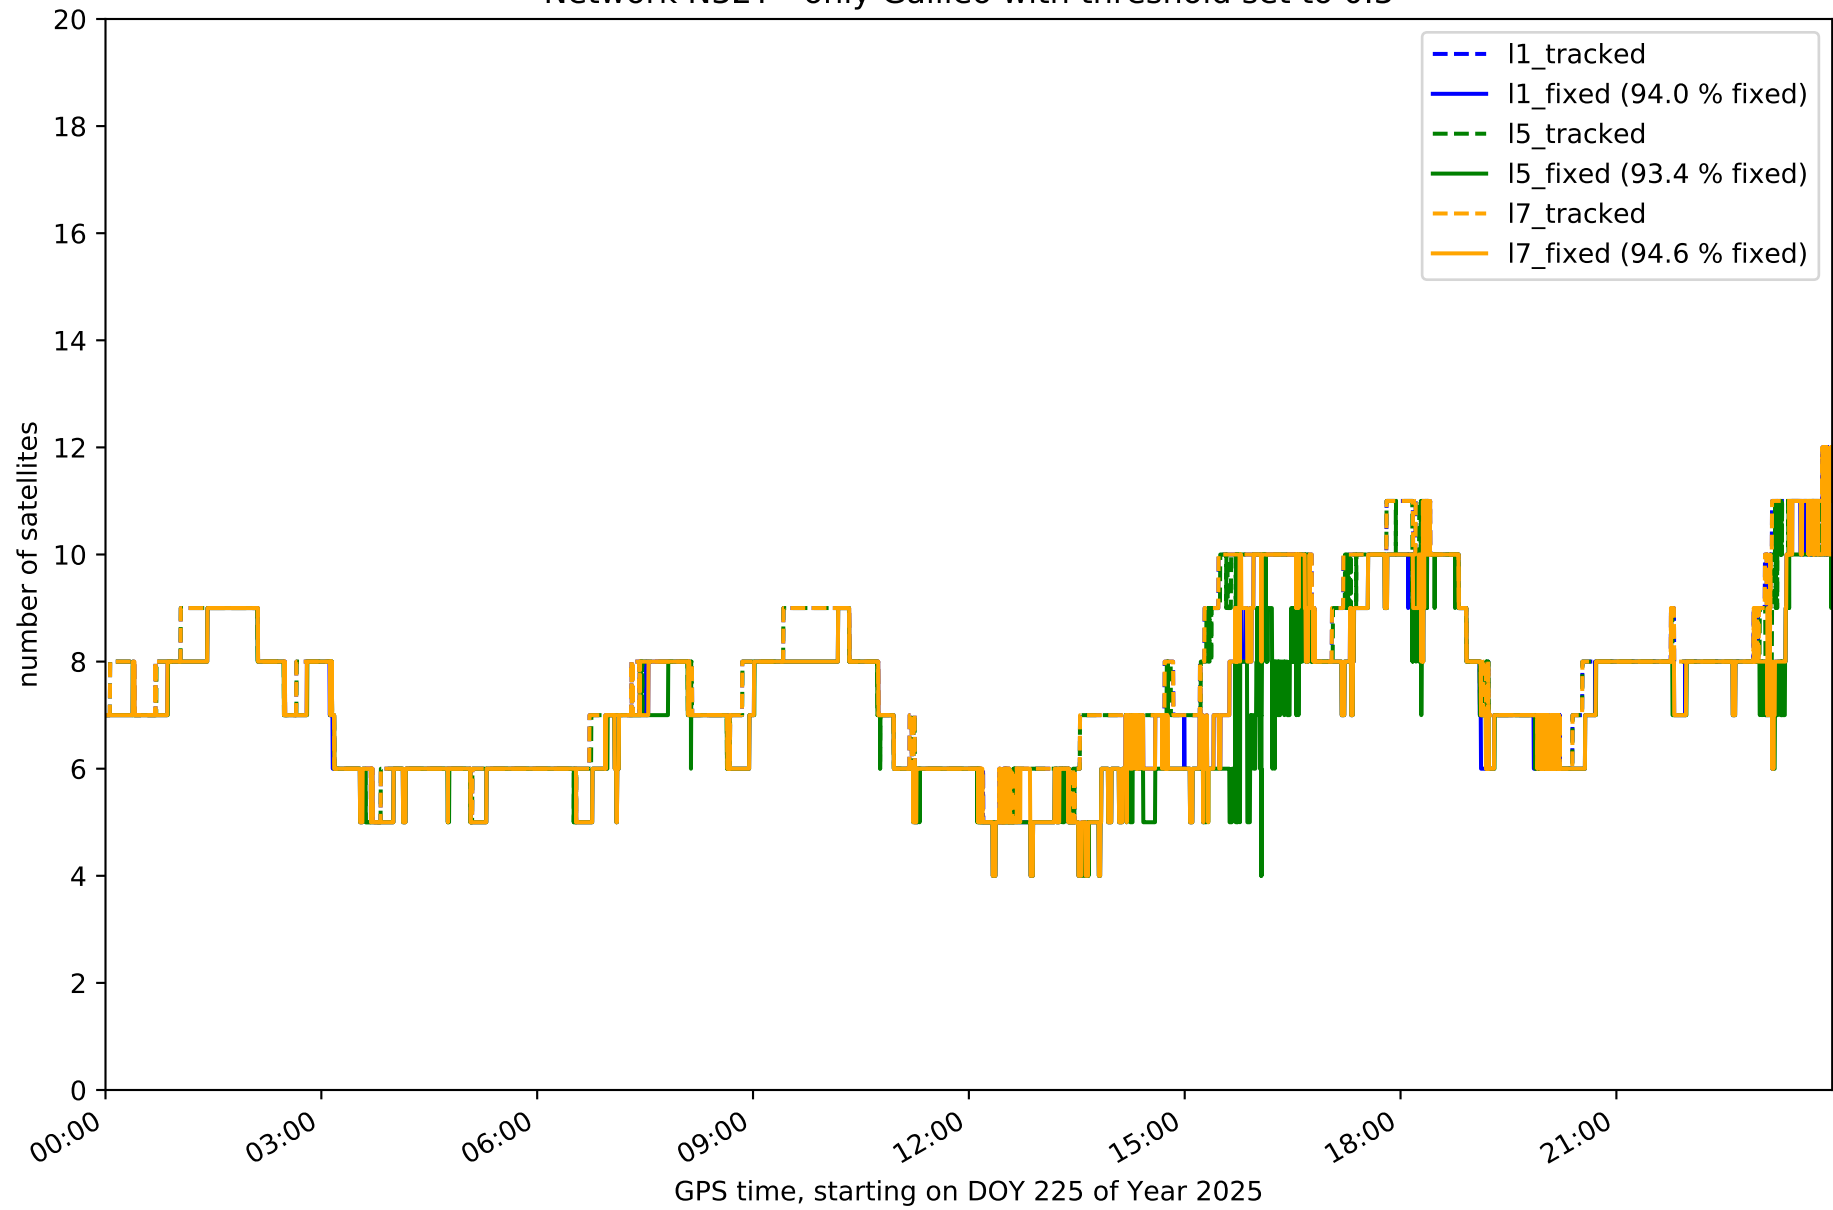


Station EH01 in network N32T

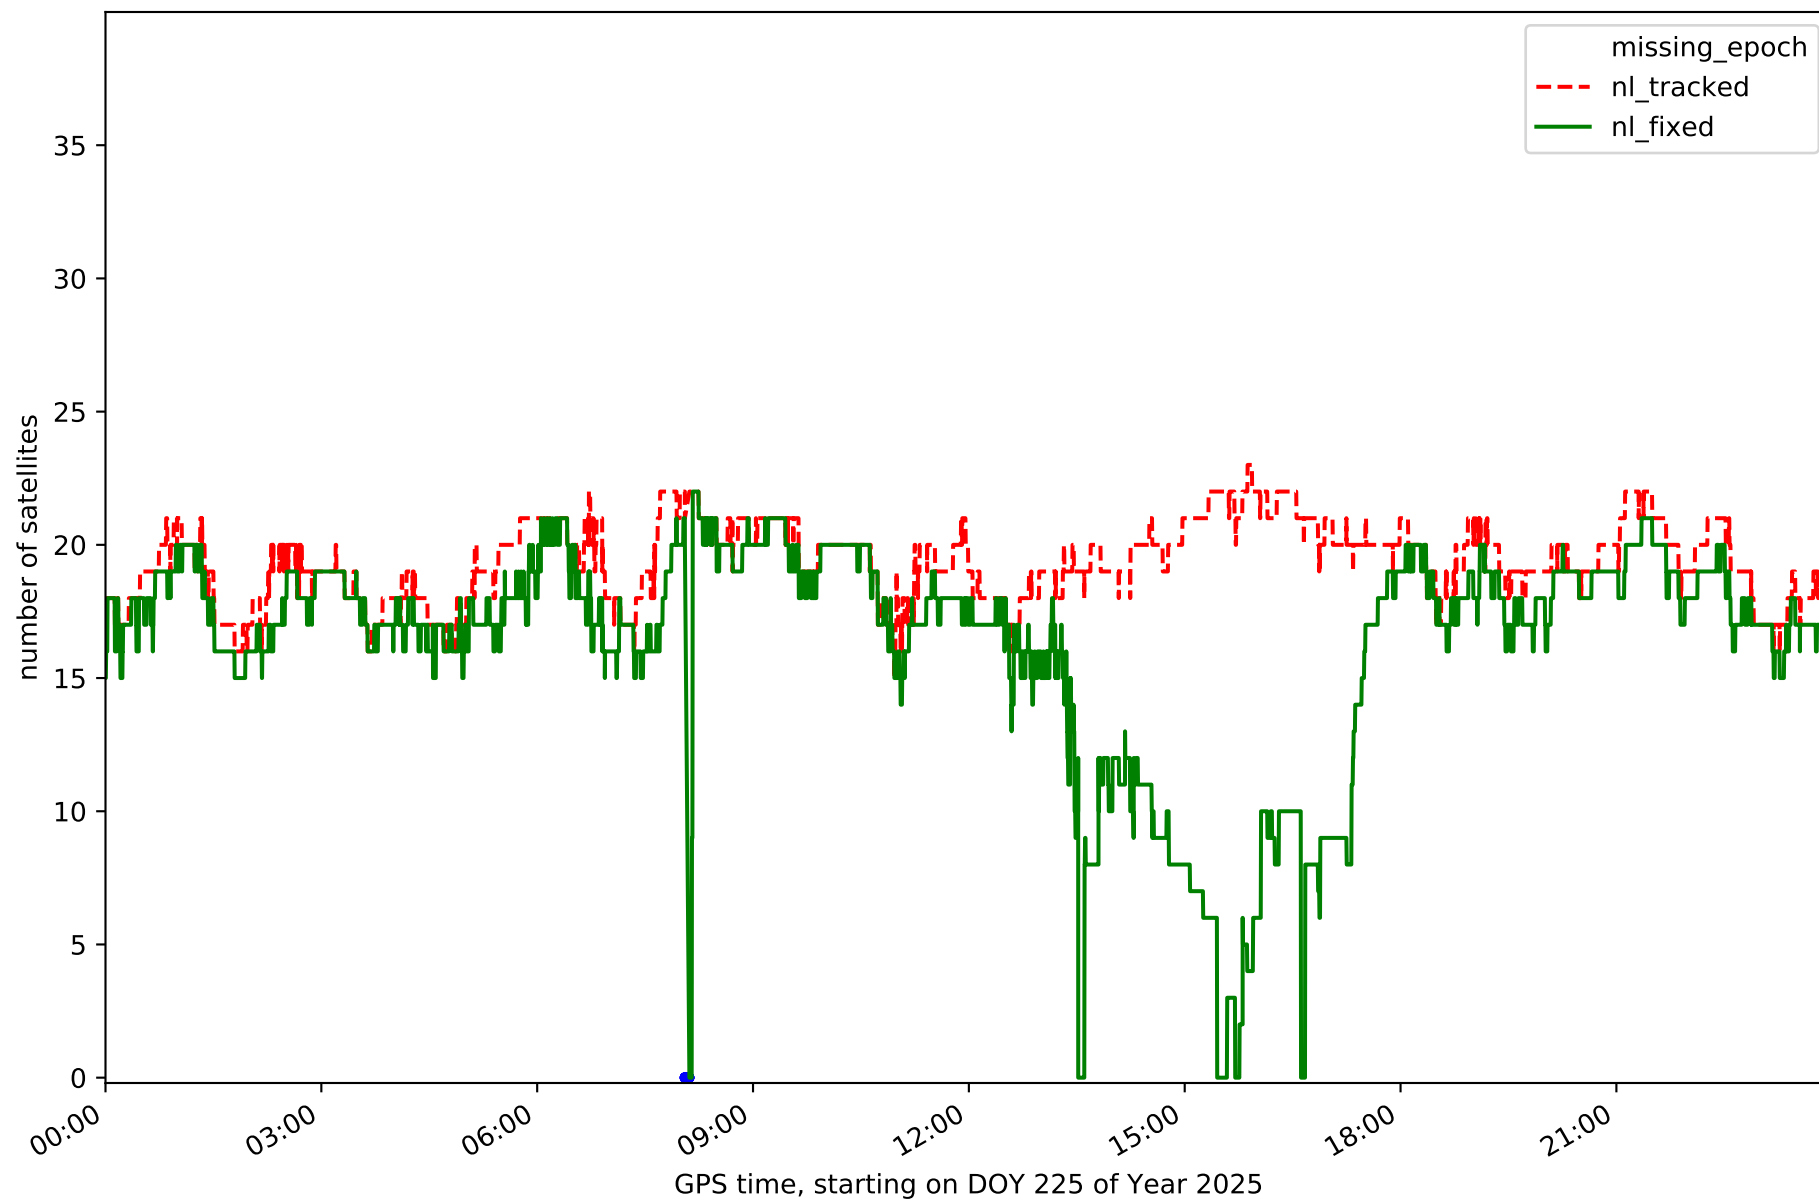


Station EH02 in network N32T

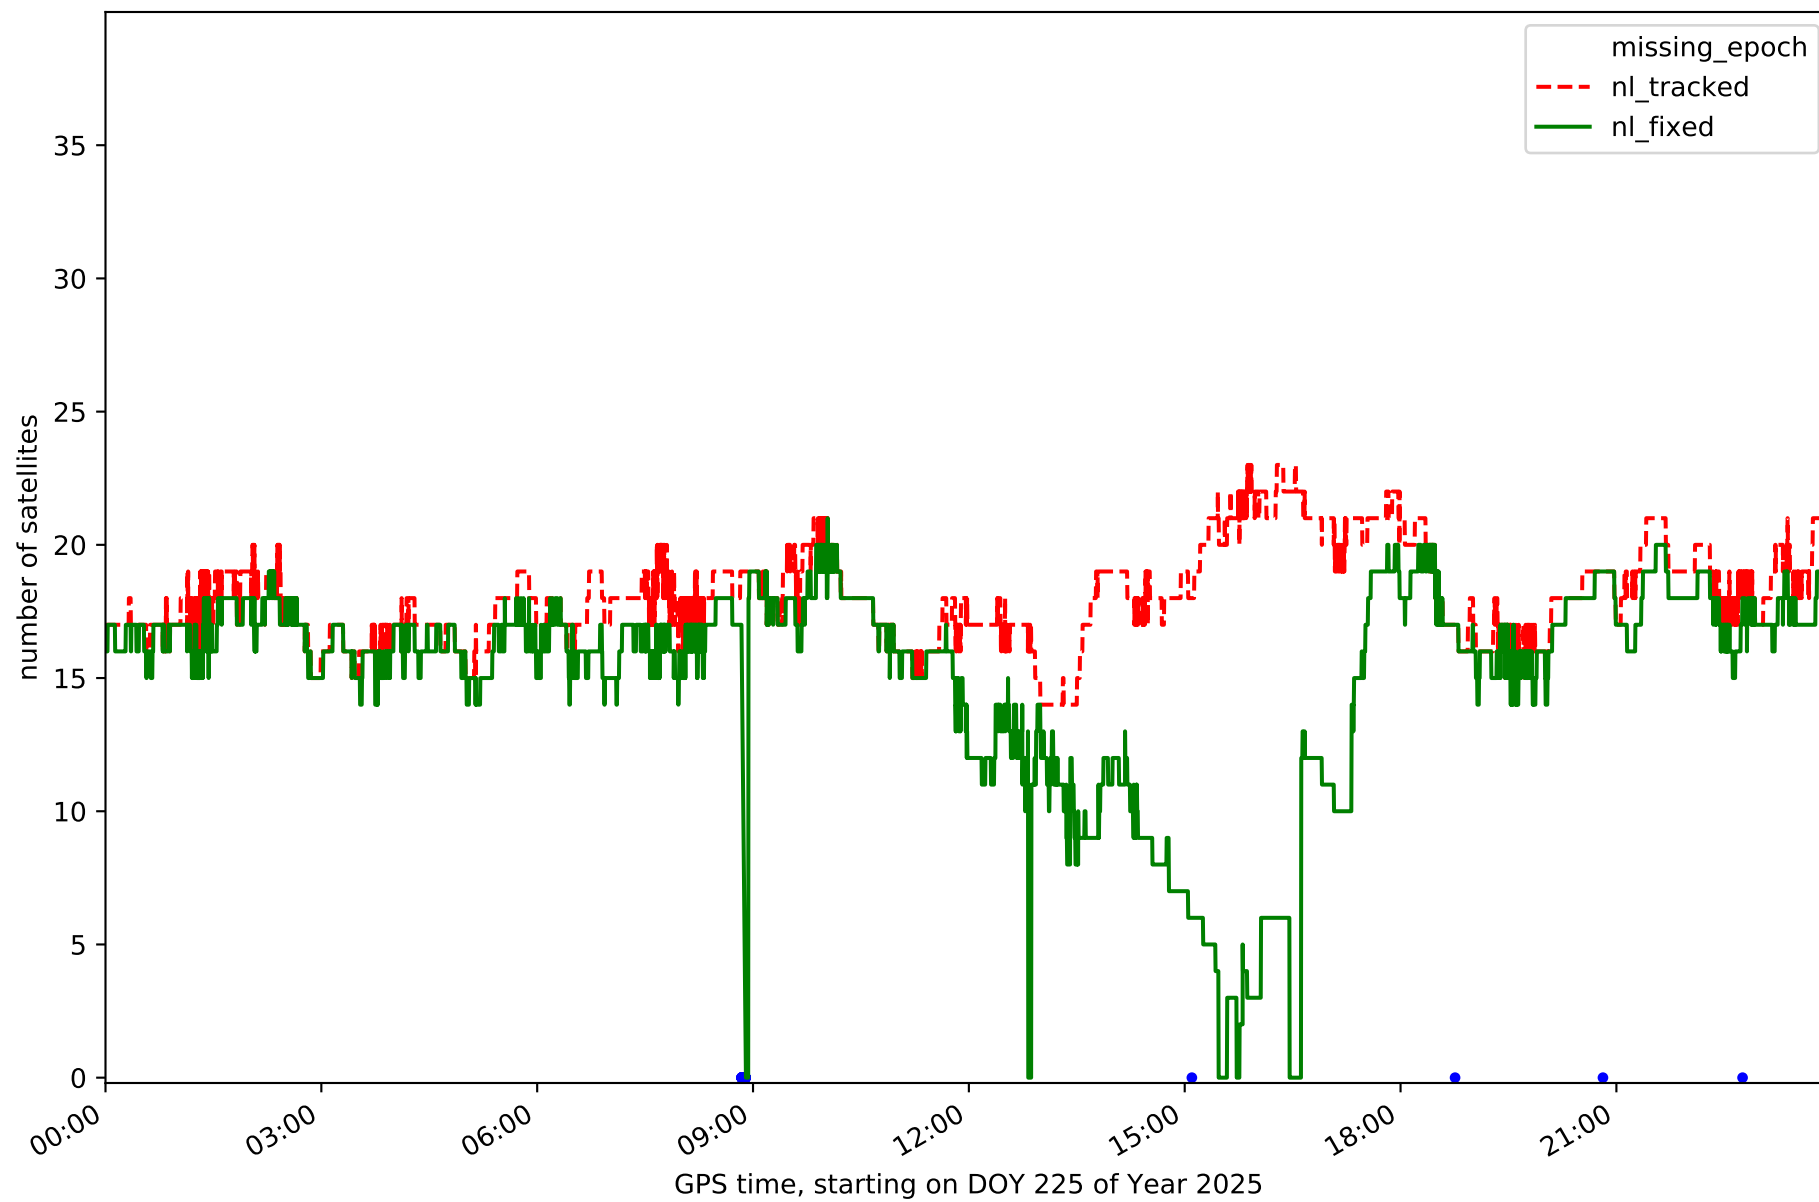


Station GOM1 in network N32T

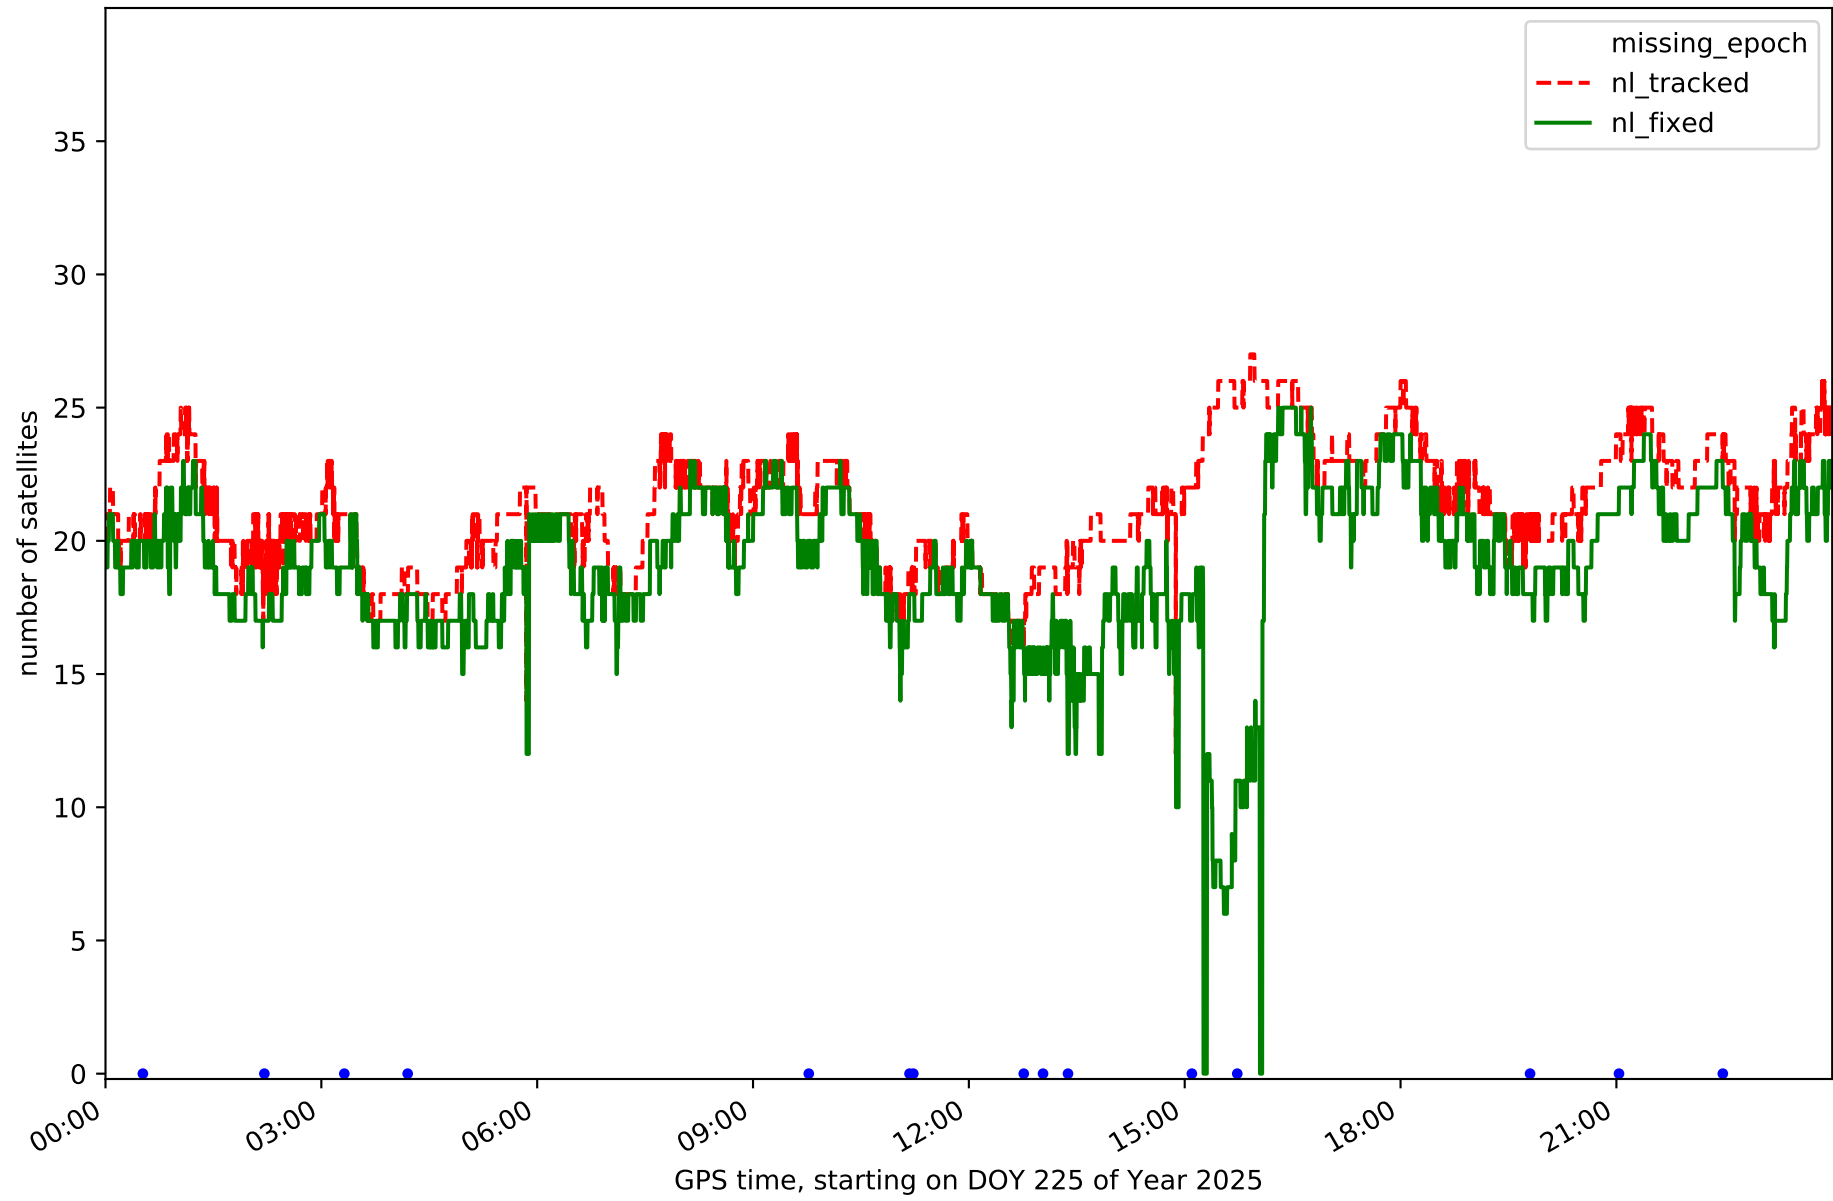


Station IZAN in network N32T

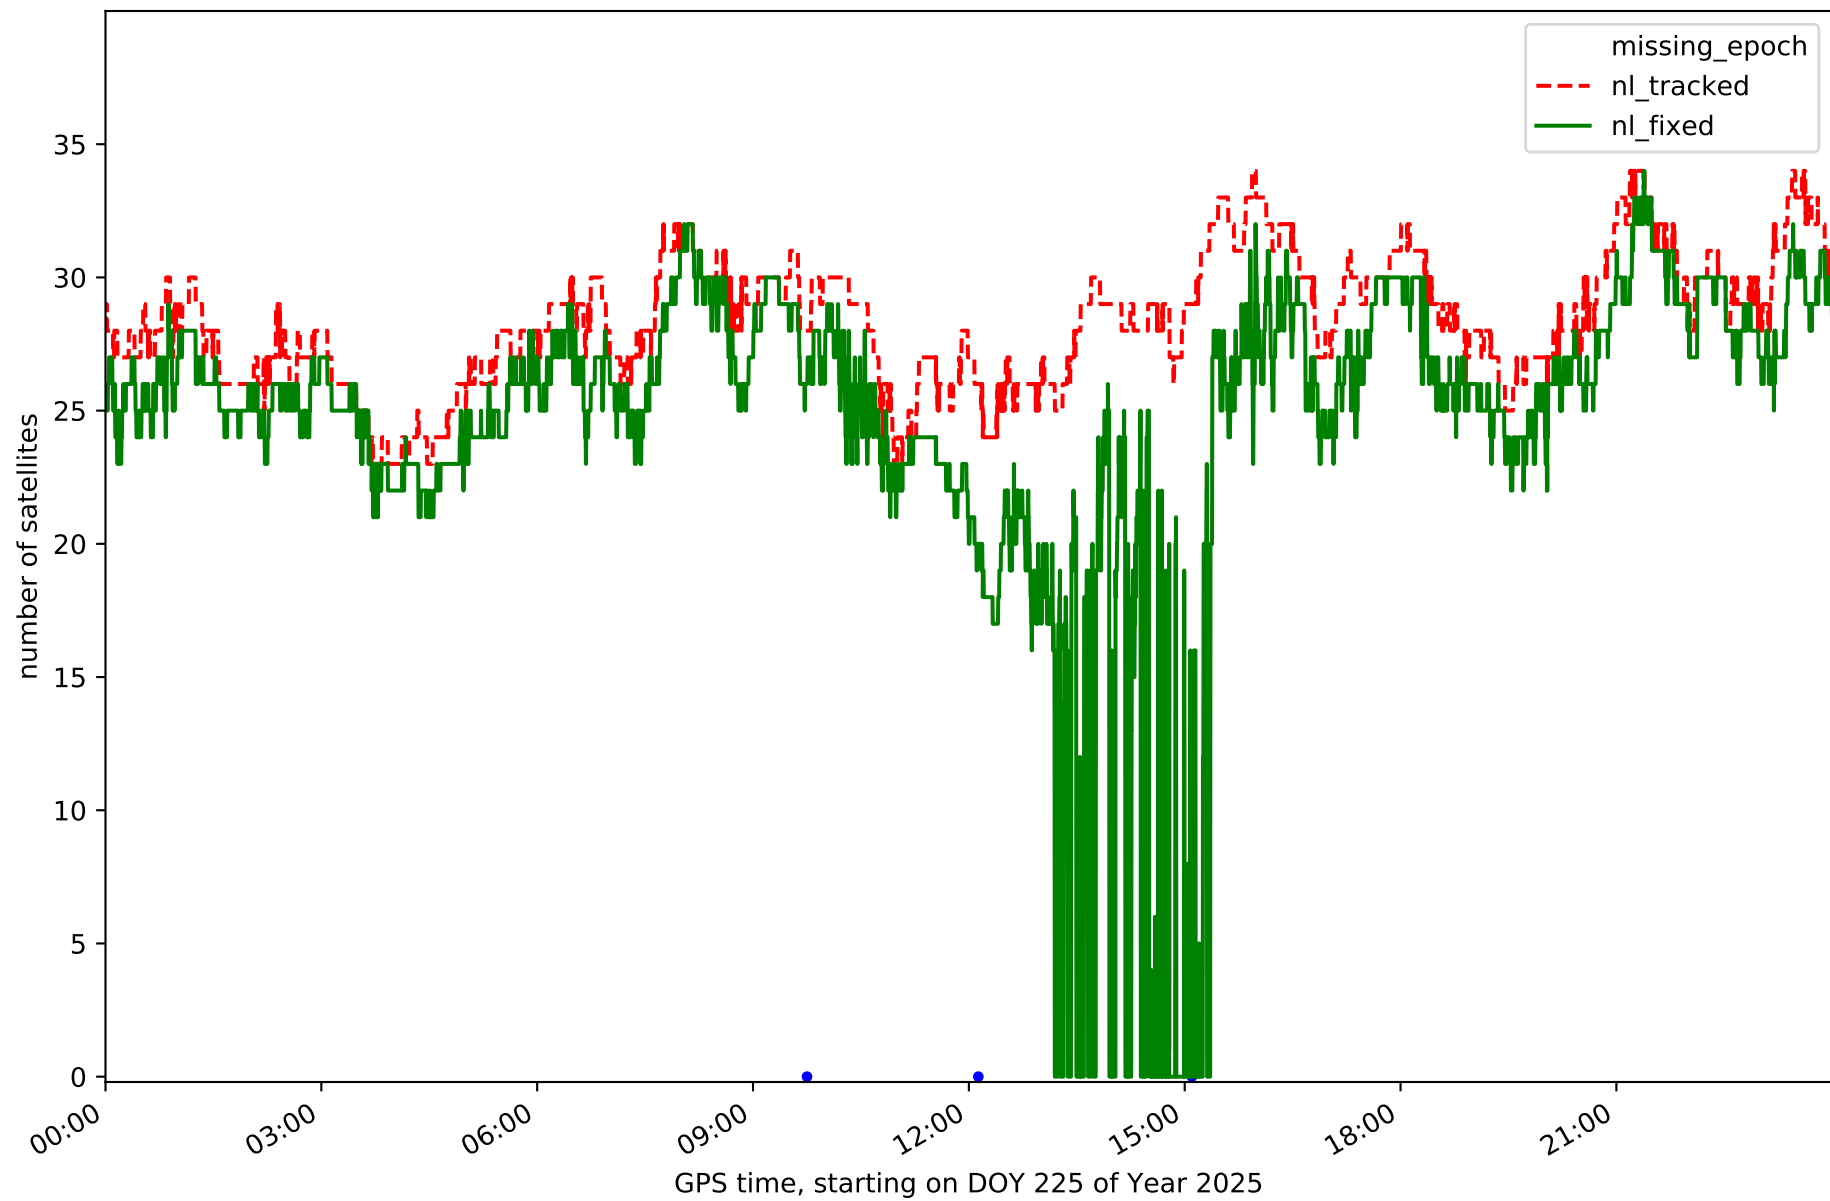


Station LP01 in network N32T

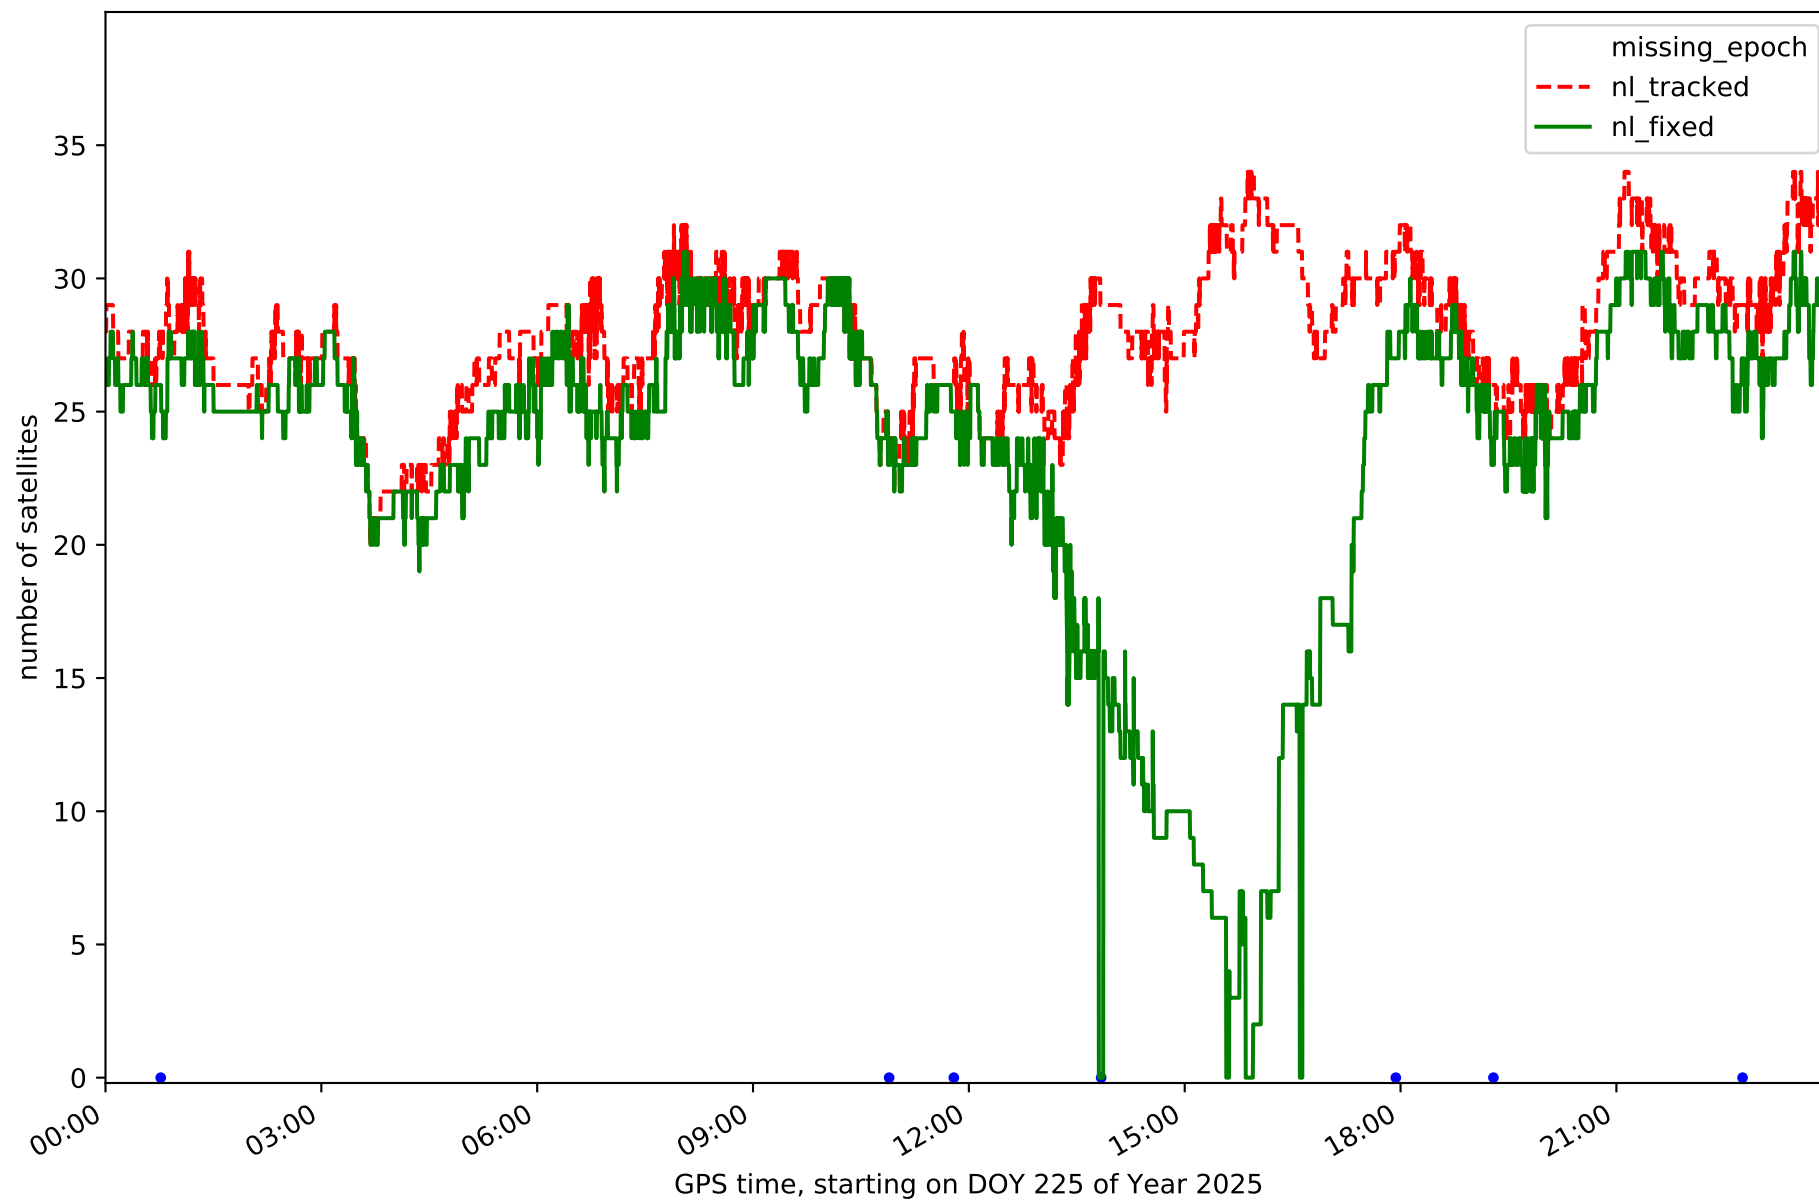


Station LP03 in network N32T

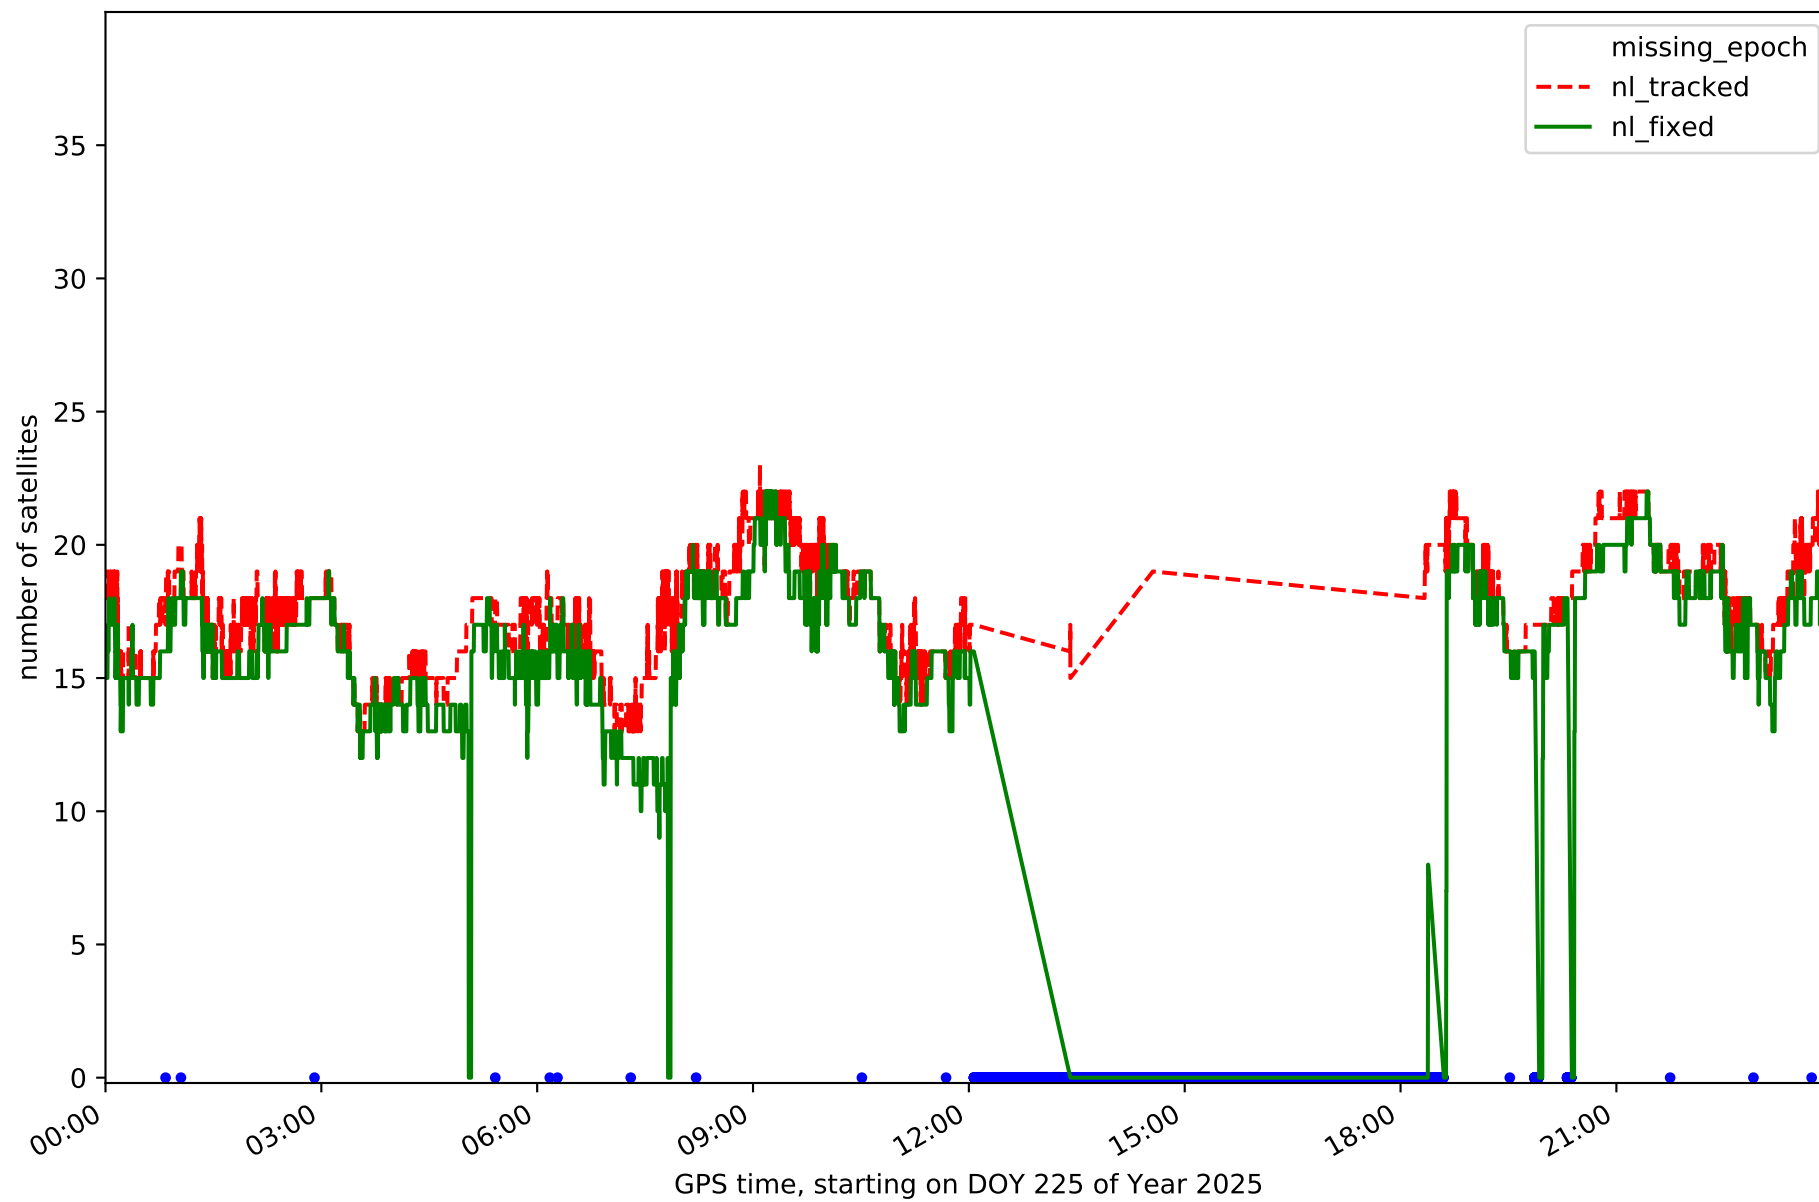


Station LPAL in network N32T

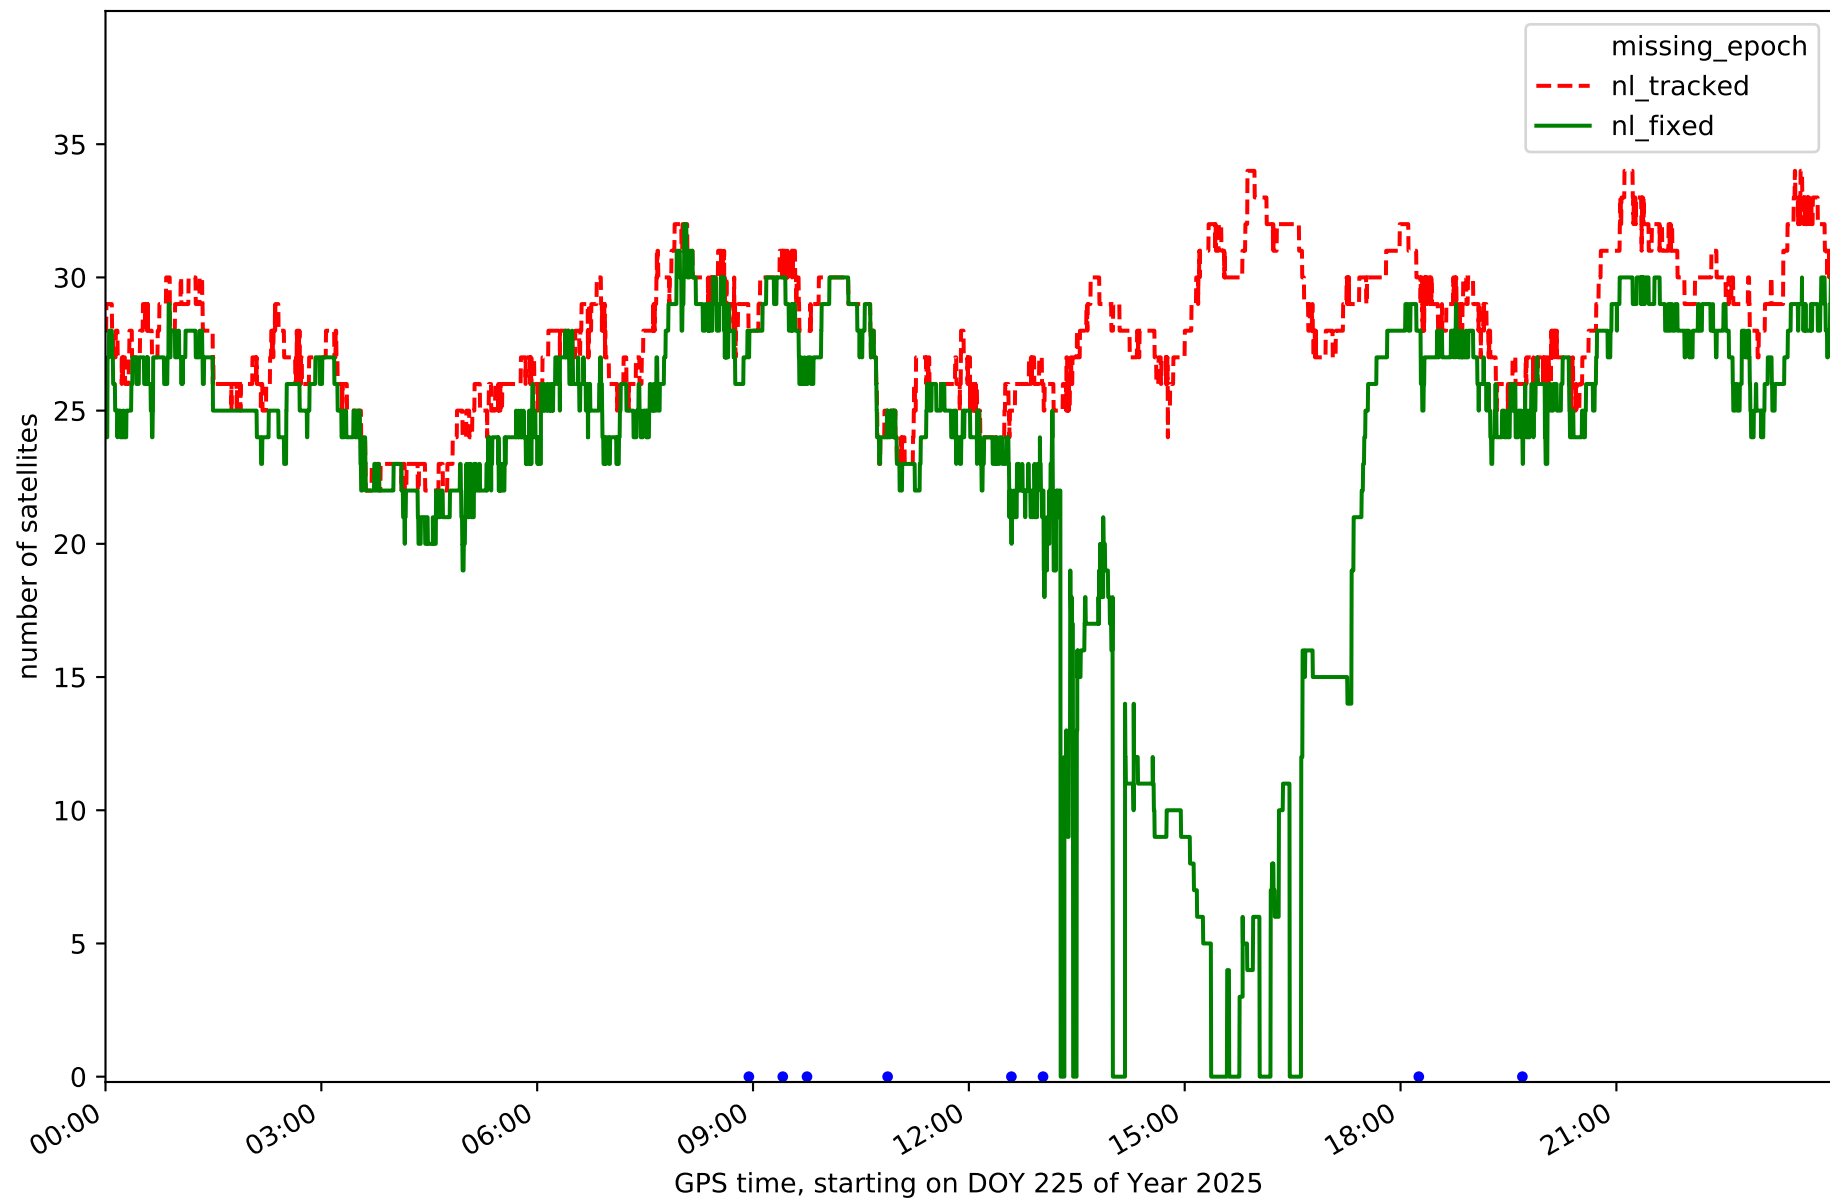


Station LRES in network N32T

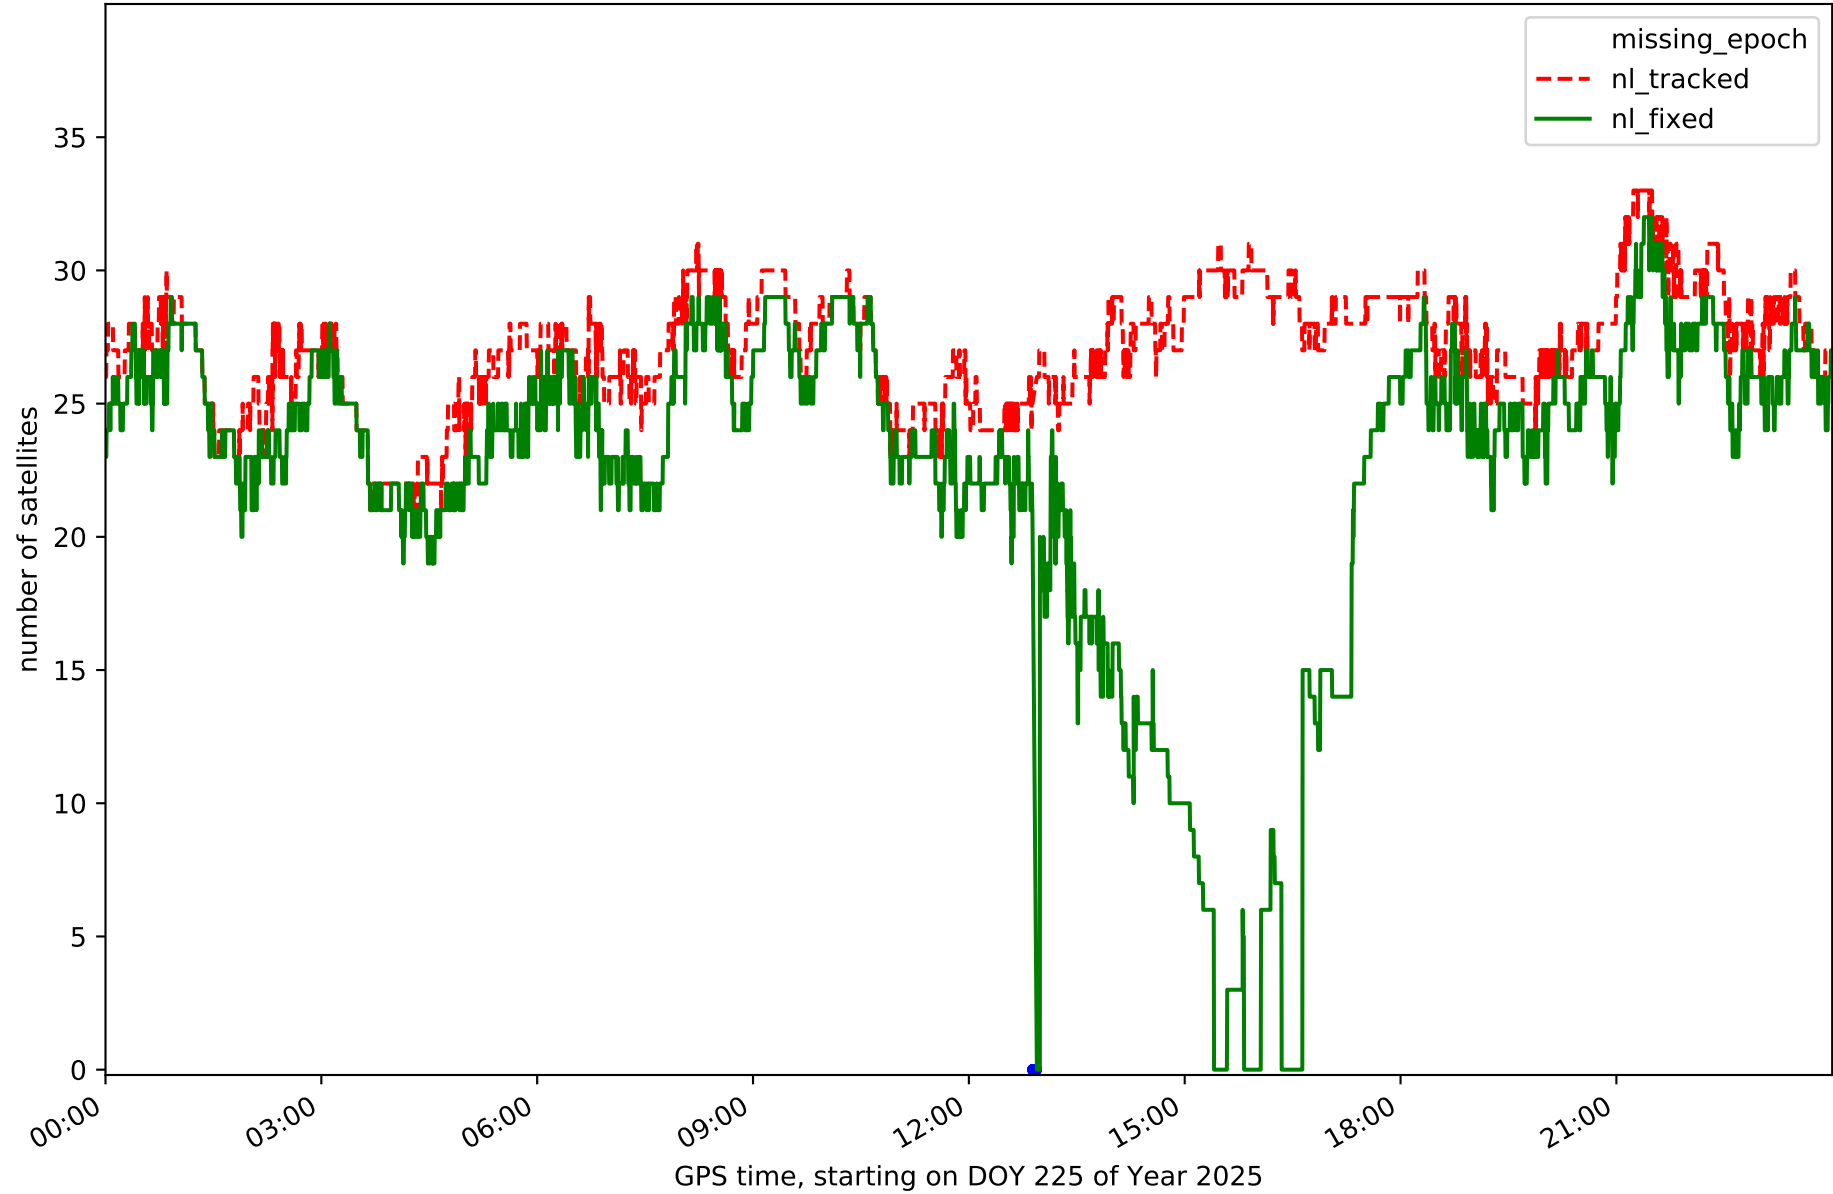


Station TN01 in network N32T

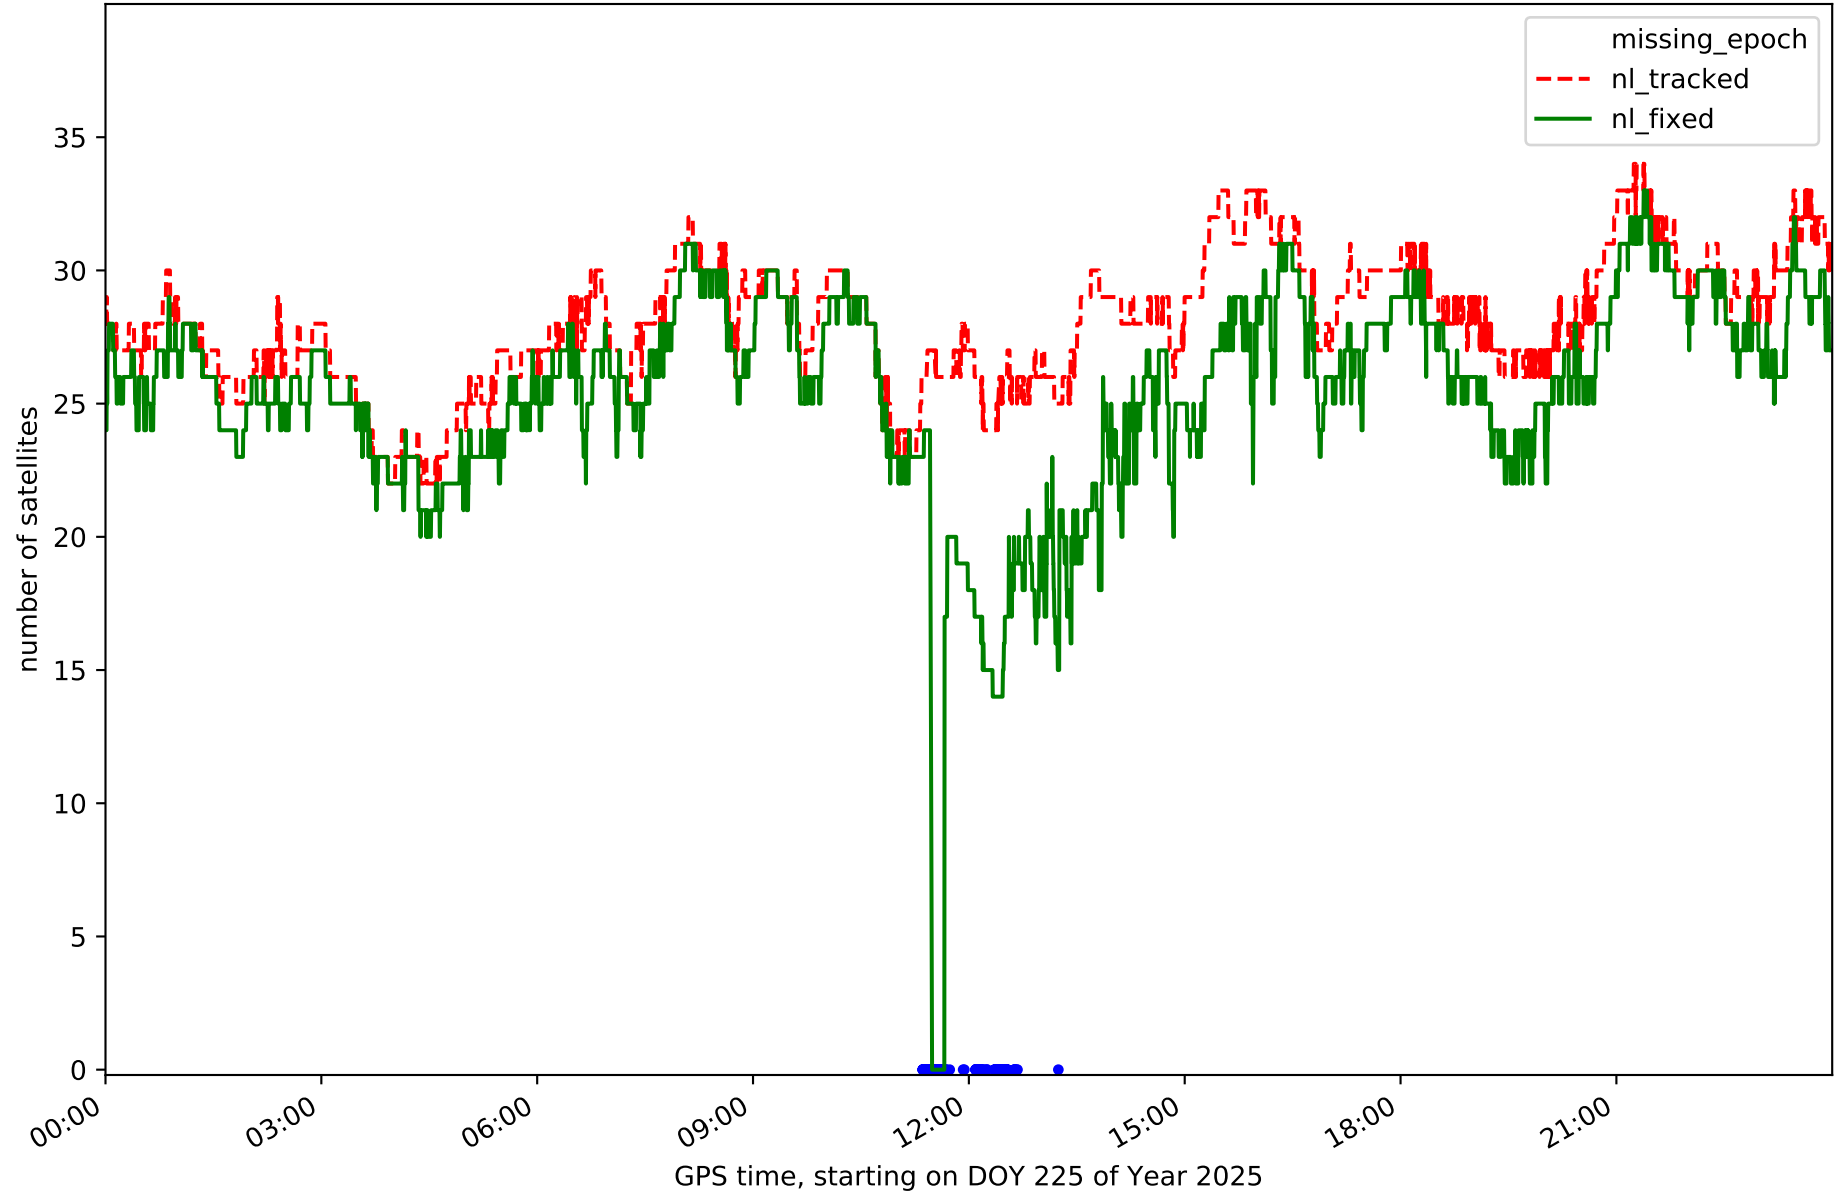


Station TN02 in network N32T

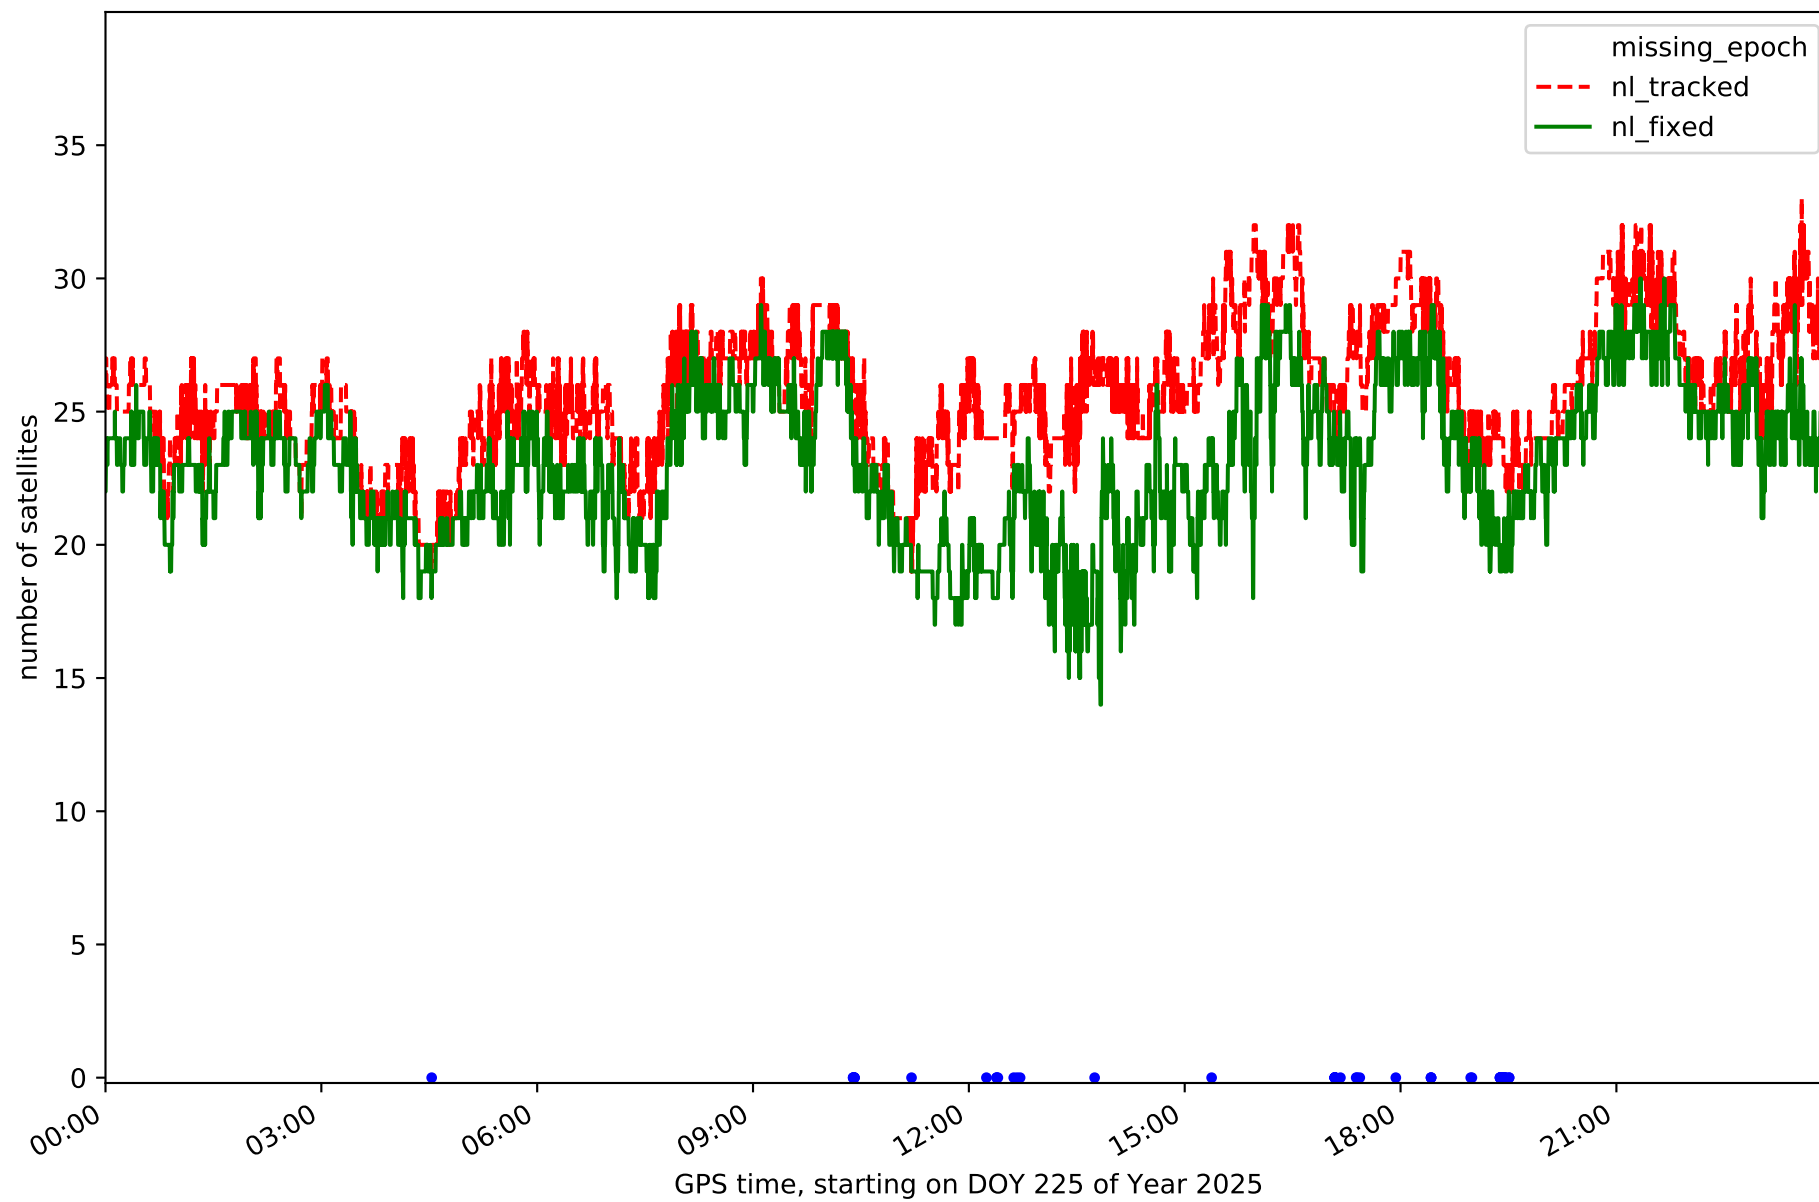


Station TN03 in network N32T

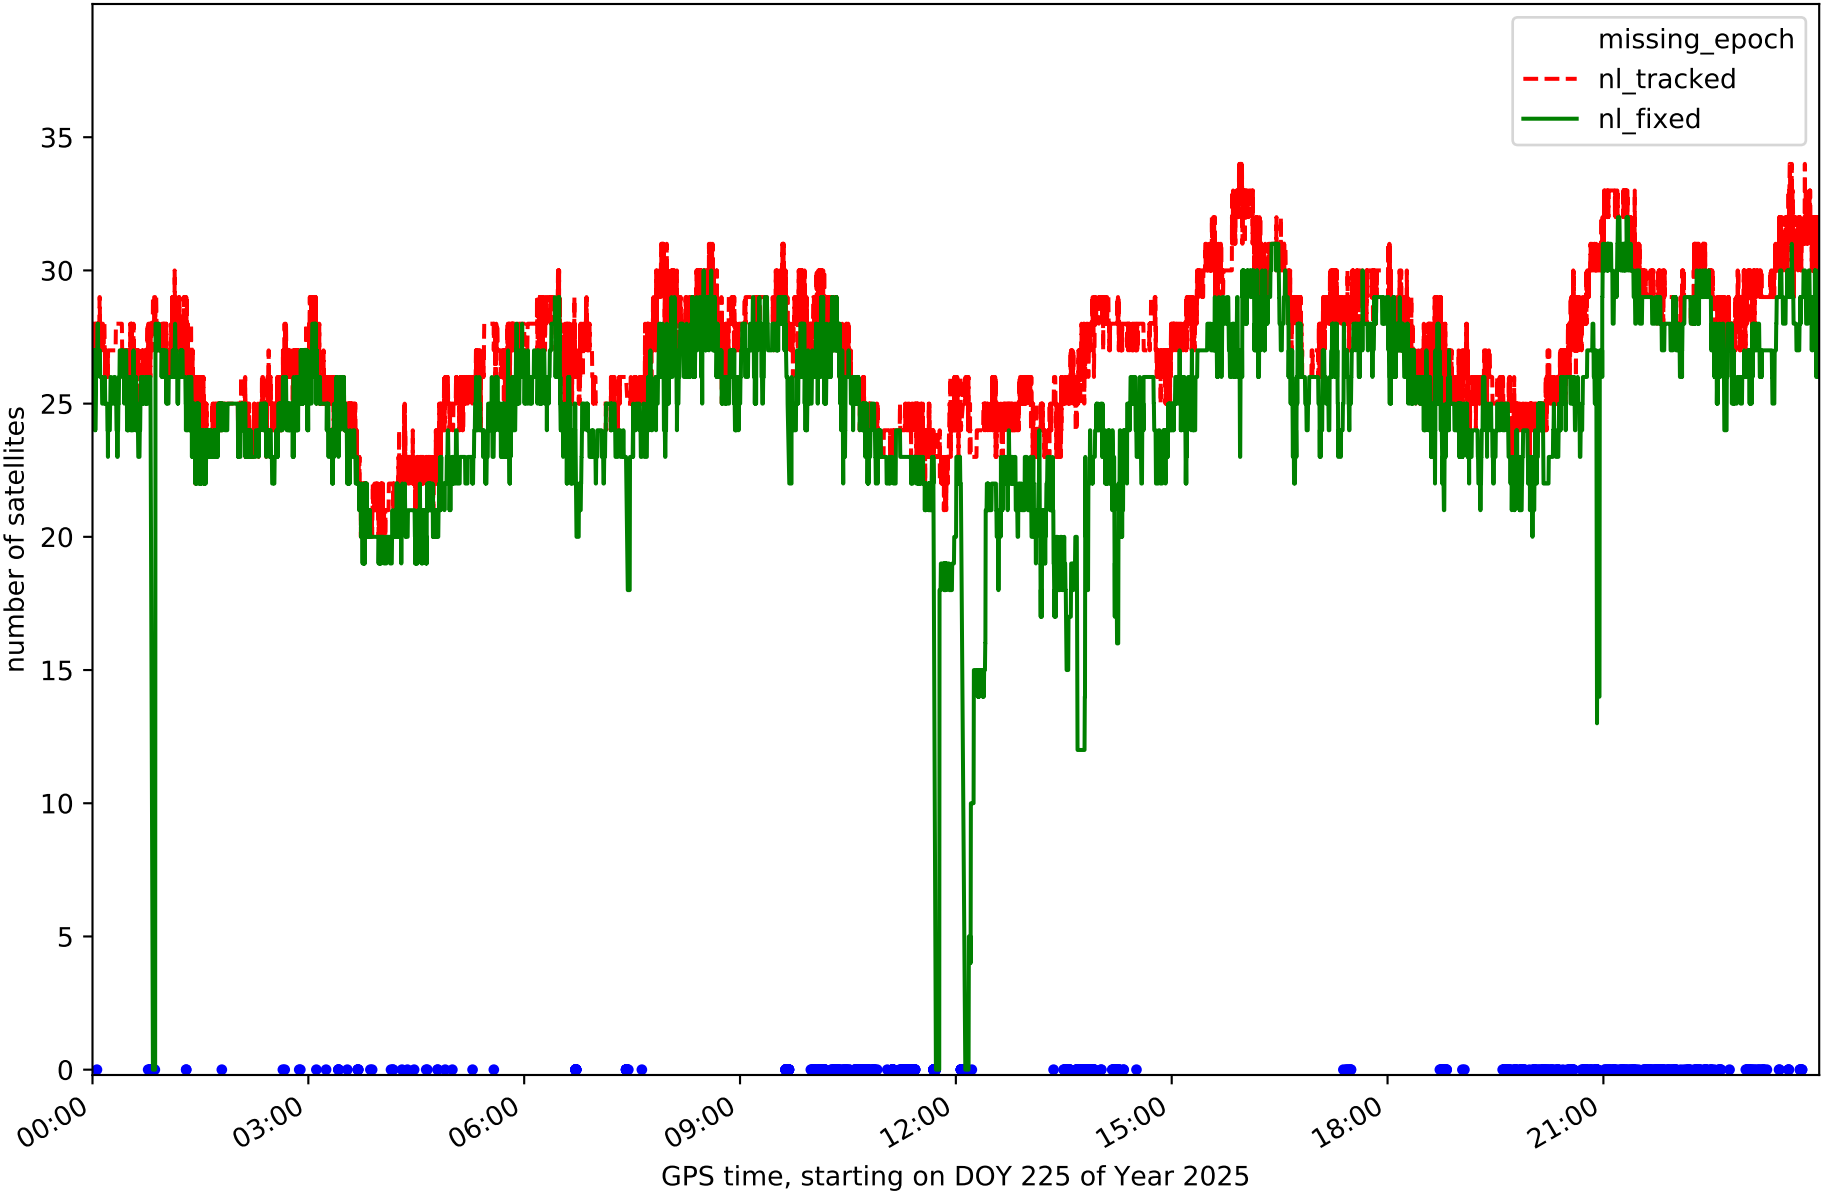


Station TN04 in network N32T

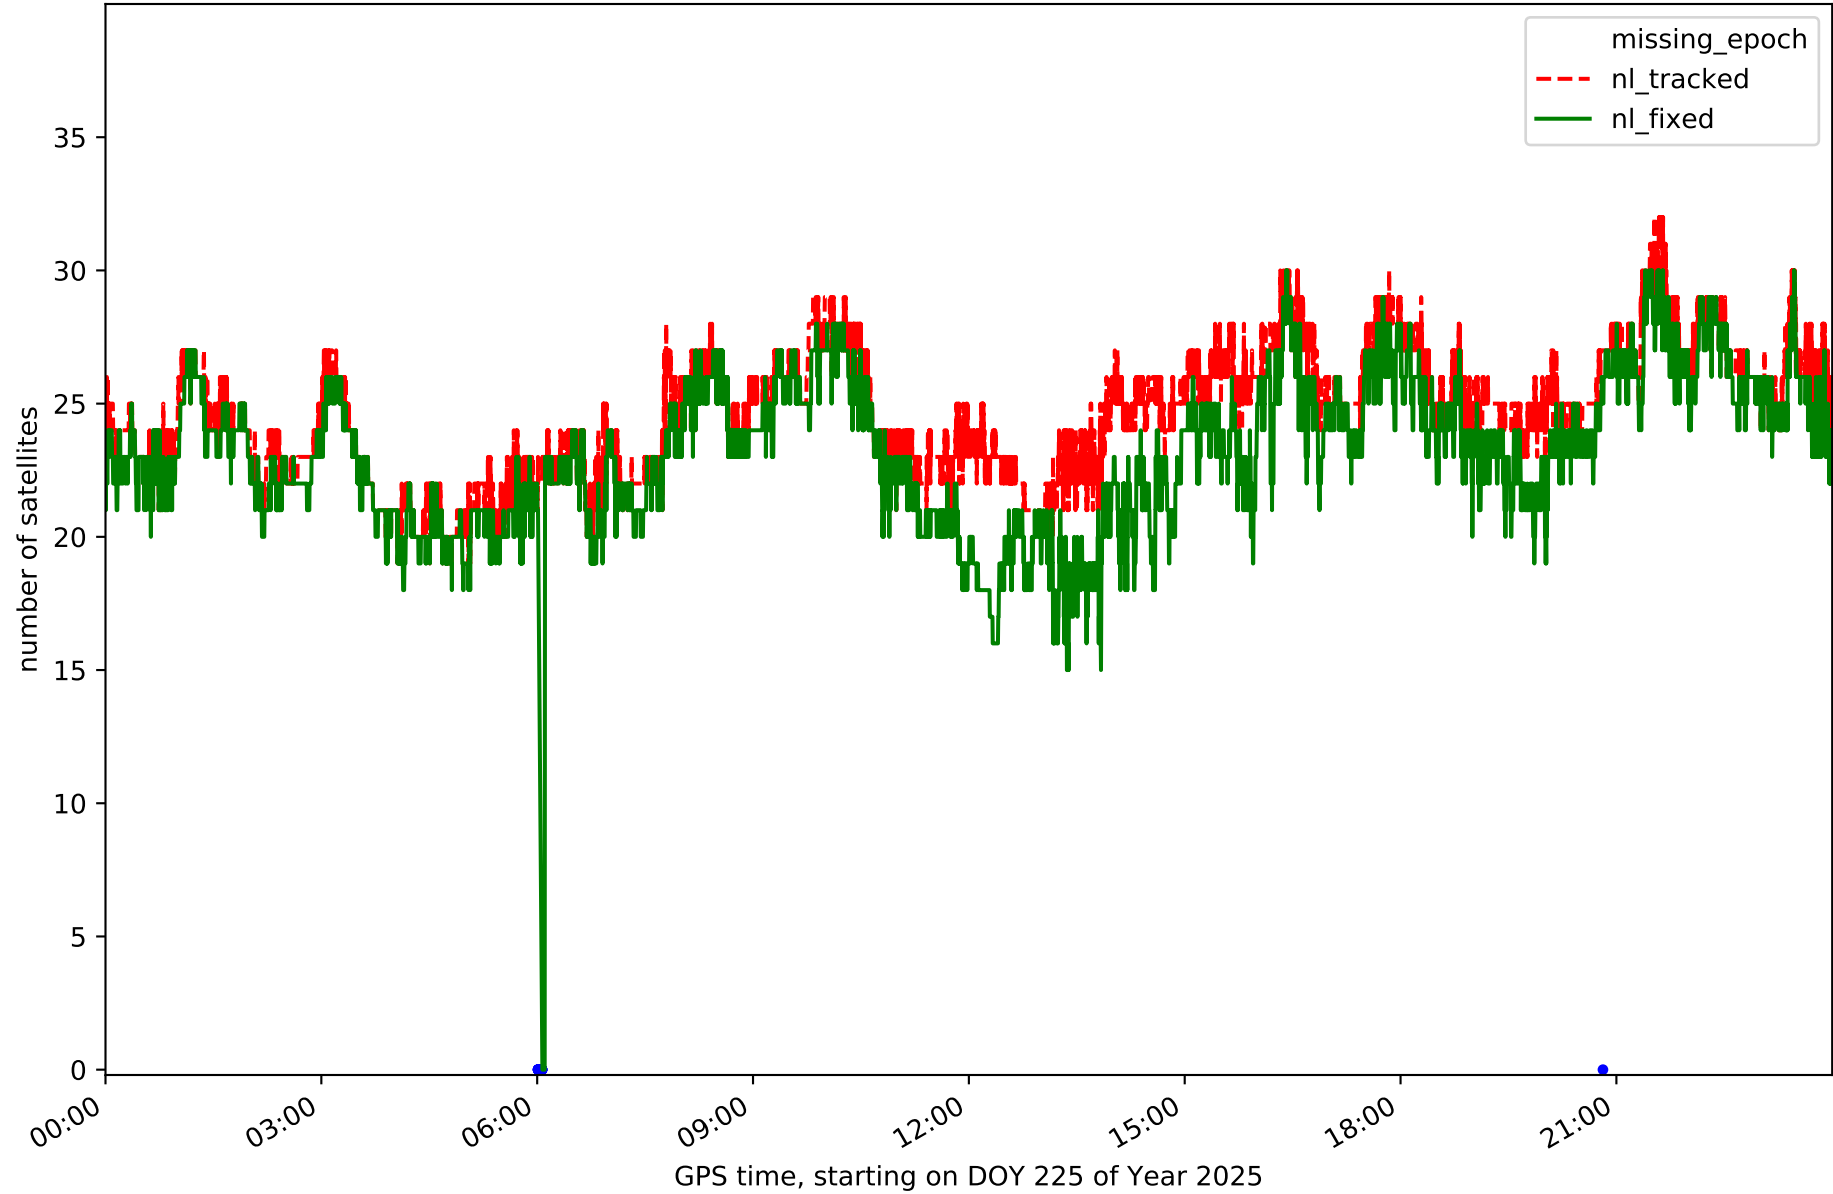


Station TN06 in network N32T

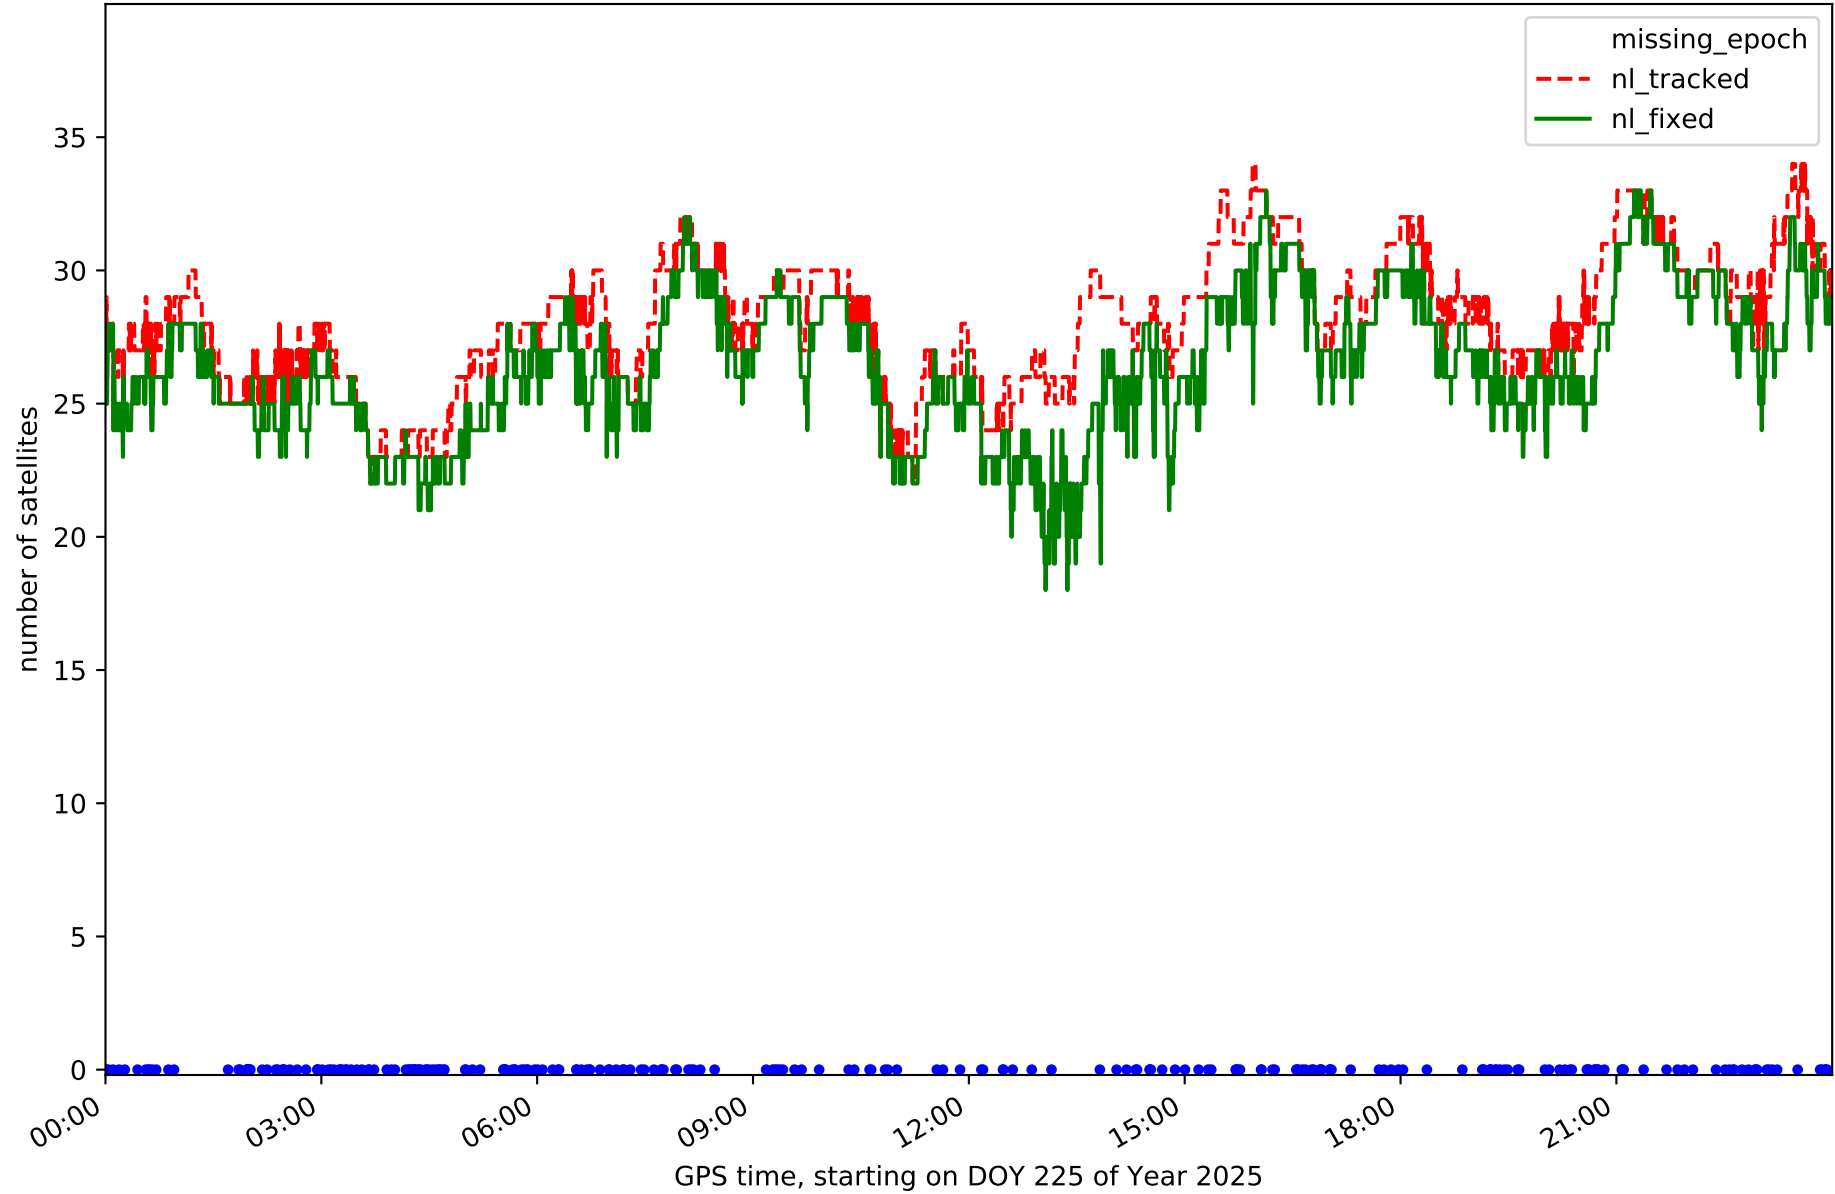


Station TN09 in network N32T

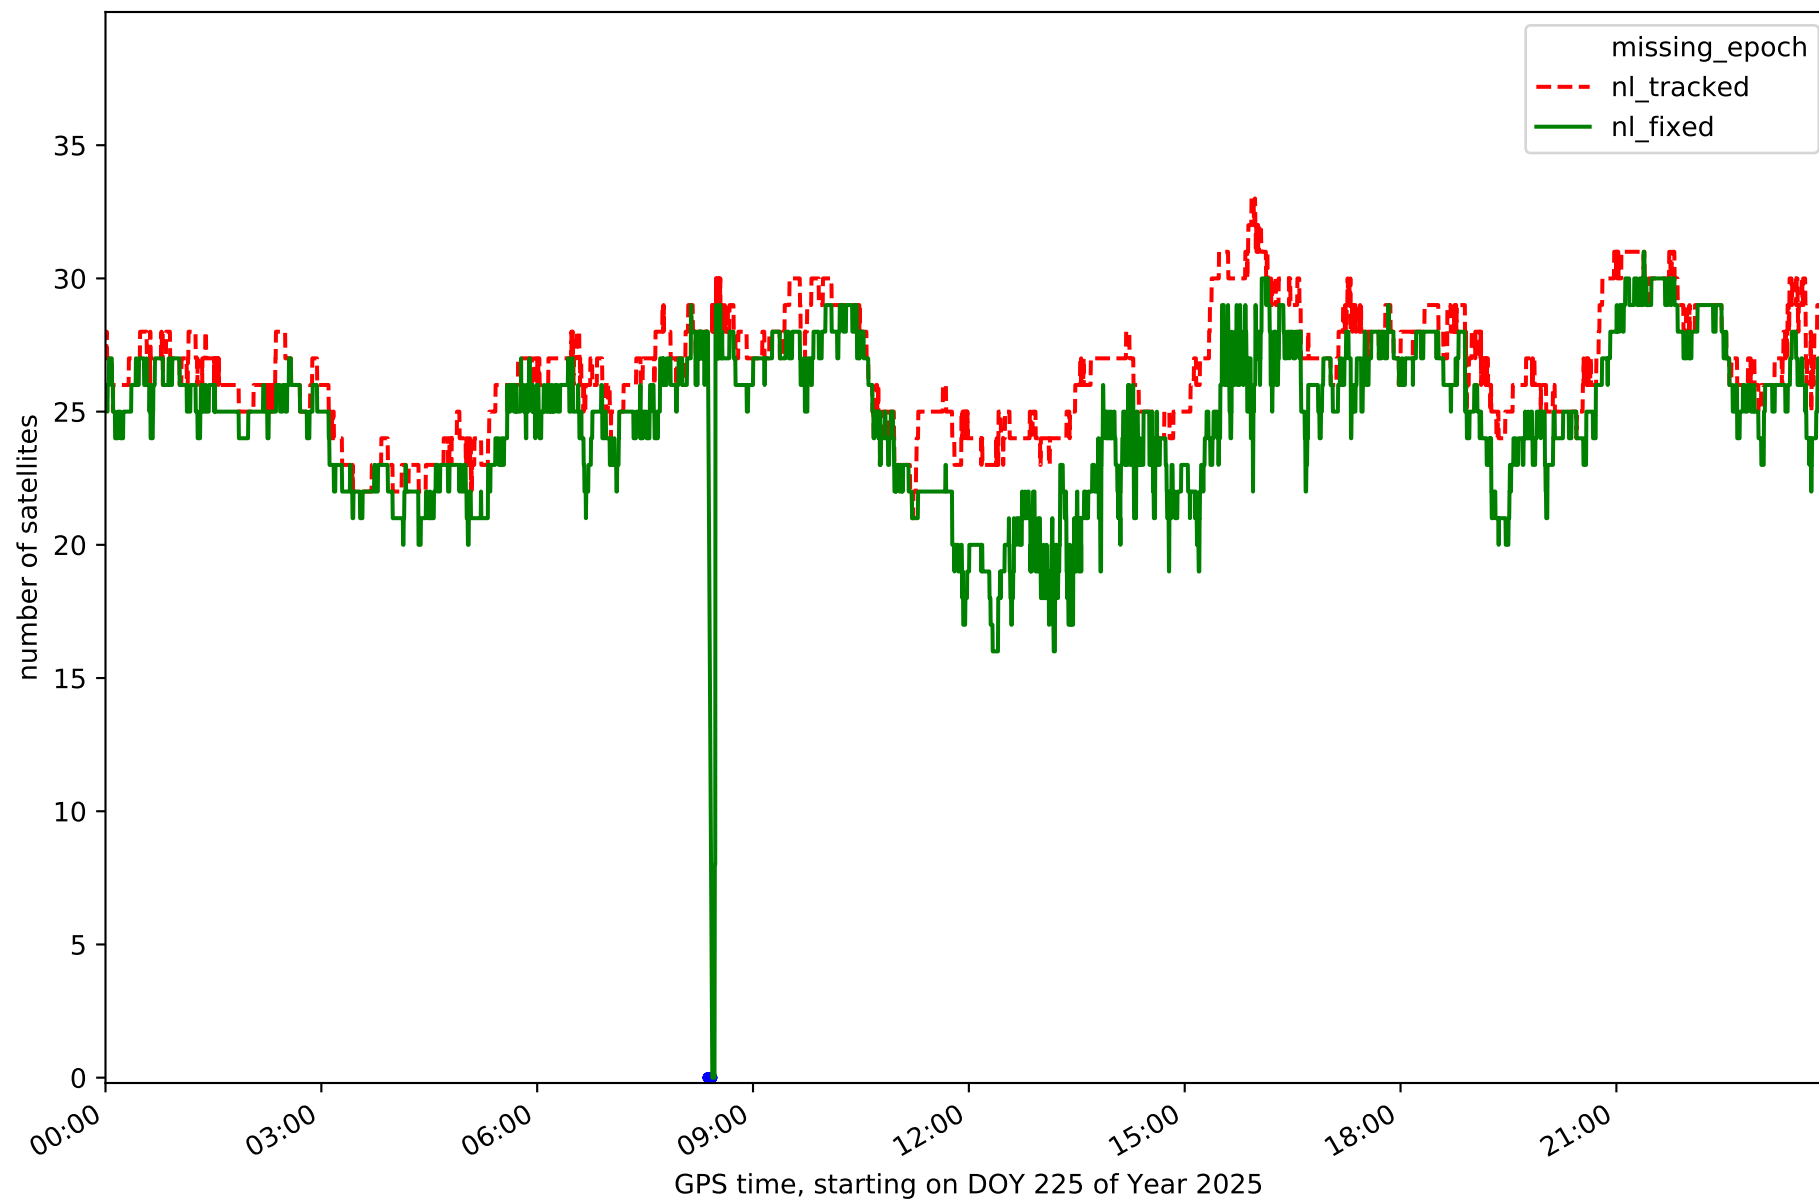


Station TE11 in network N32T

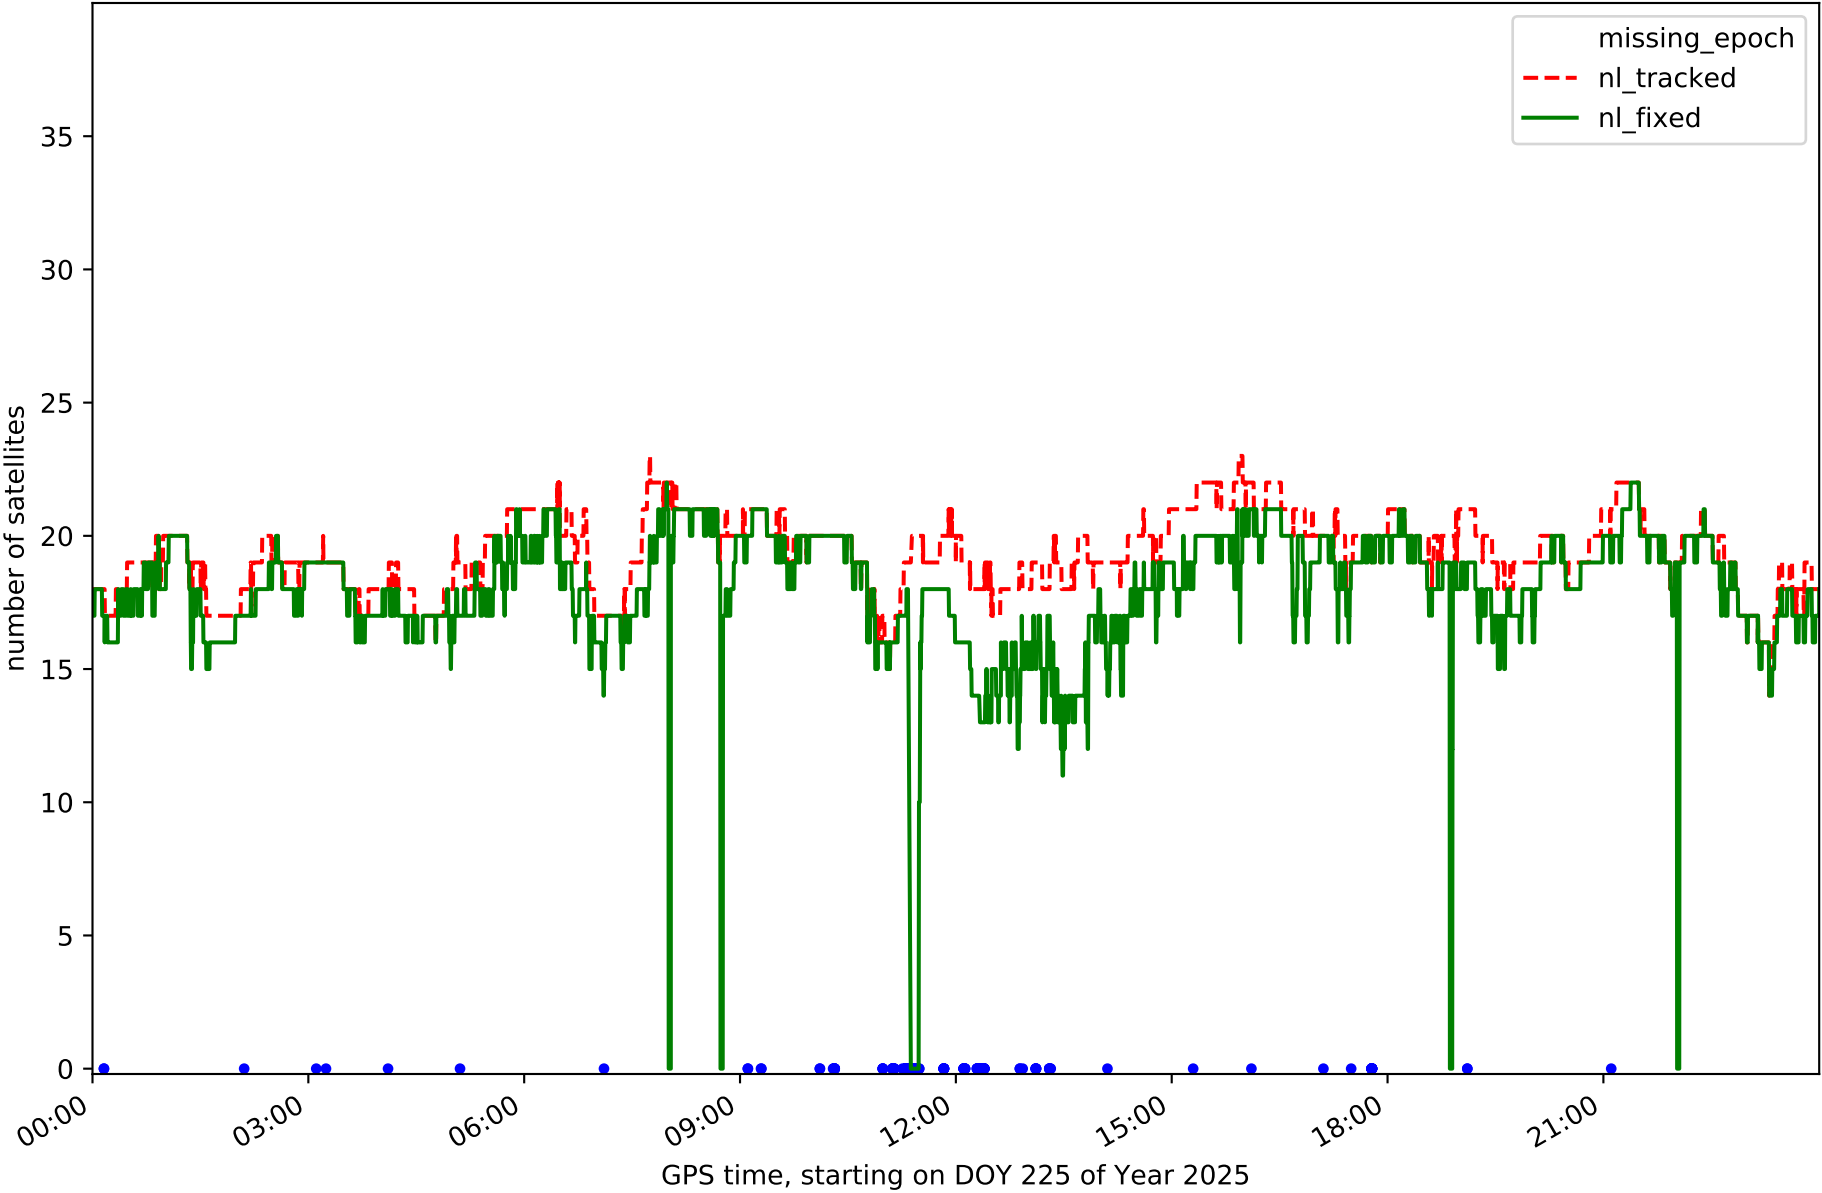


RefCheck for station EH01 in network N32T

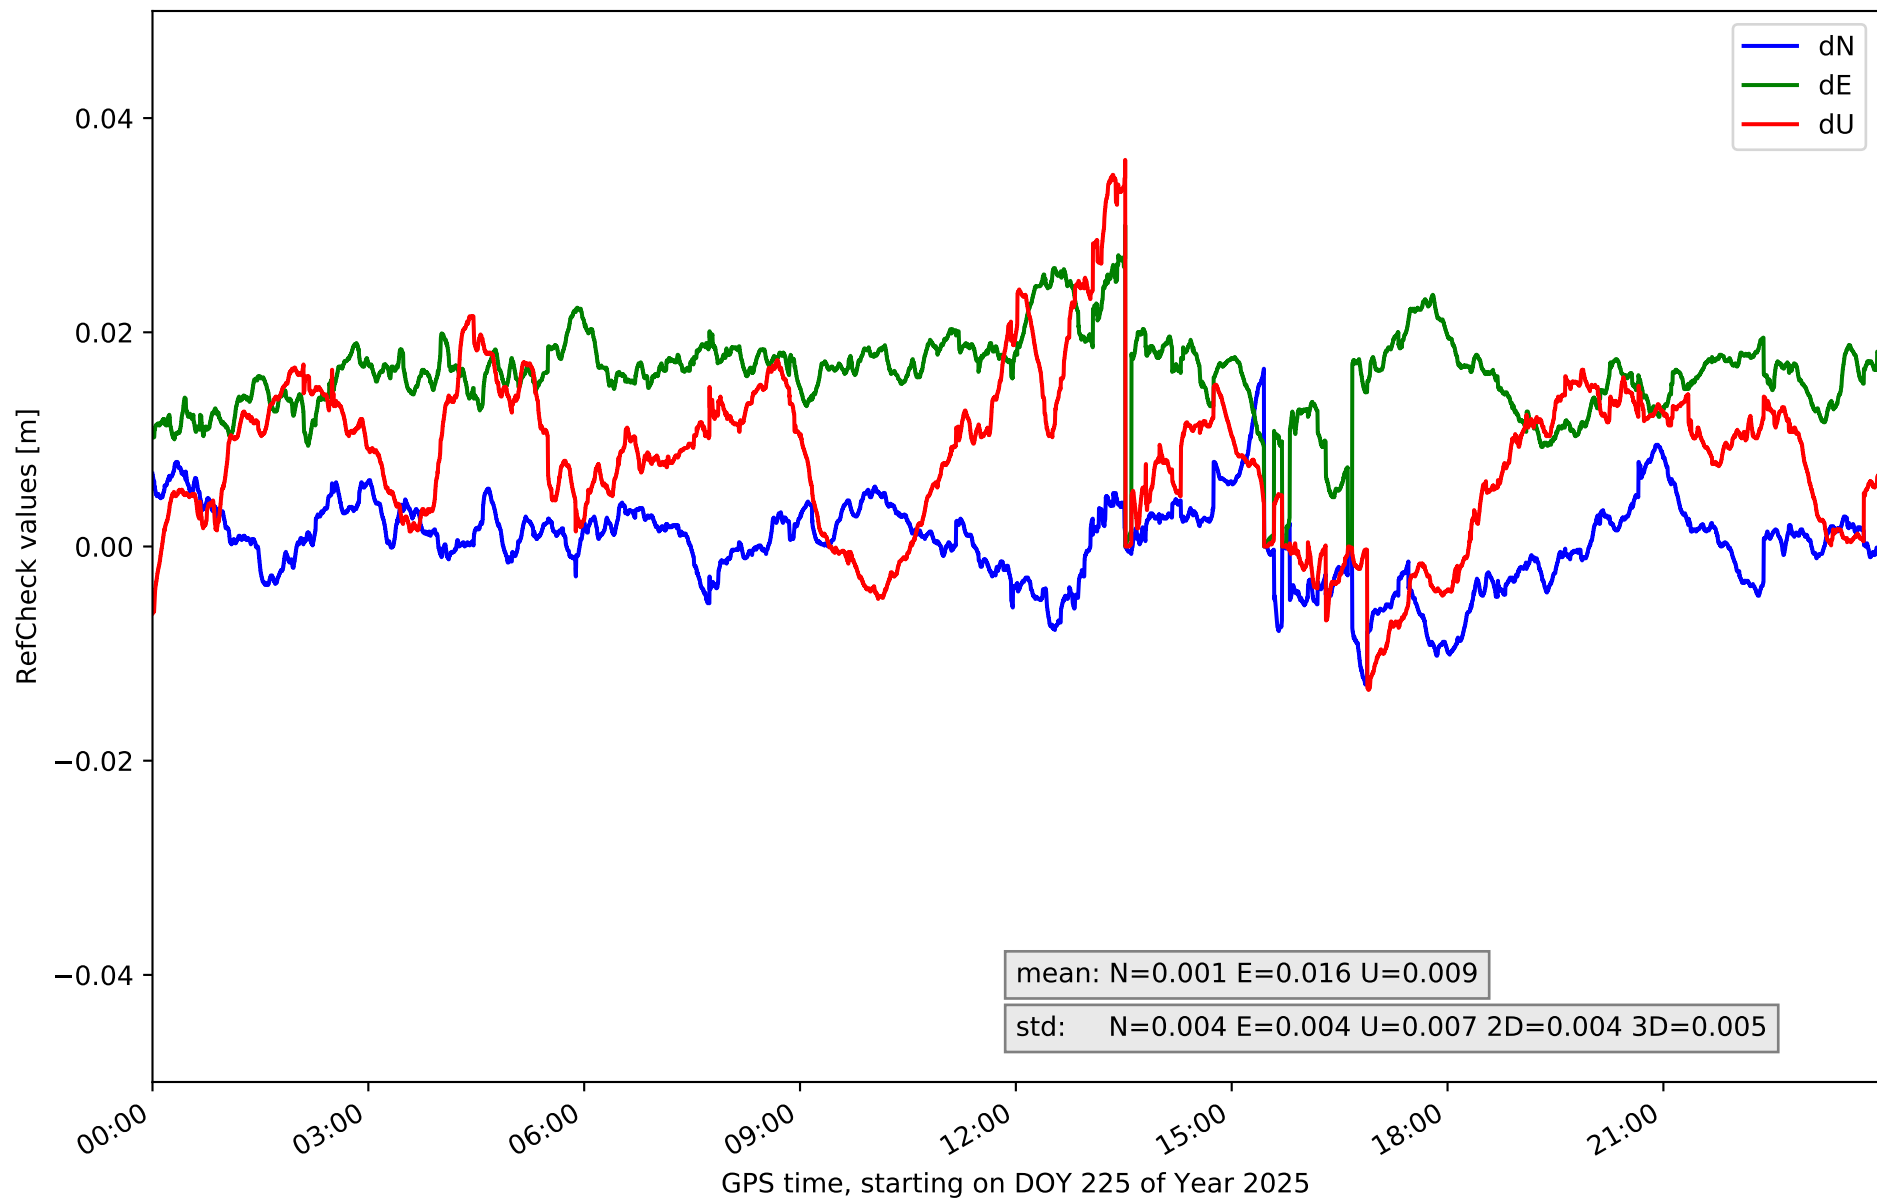


RefCheck for station EH02 in network N32T

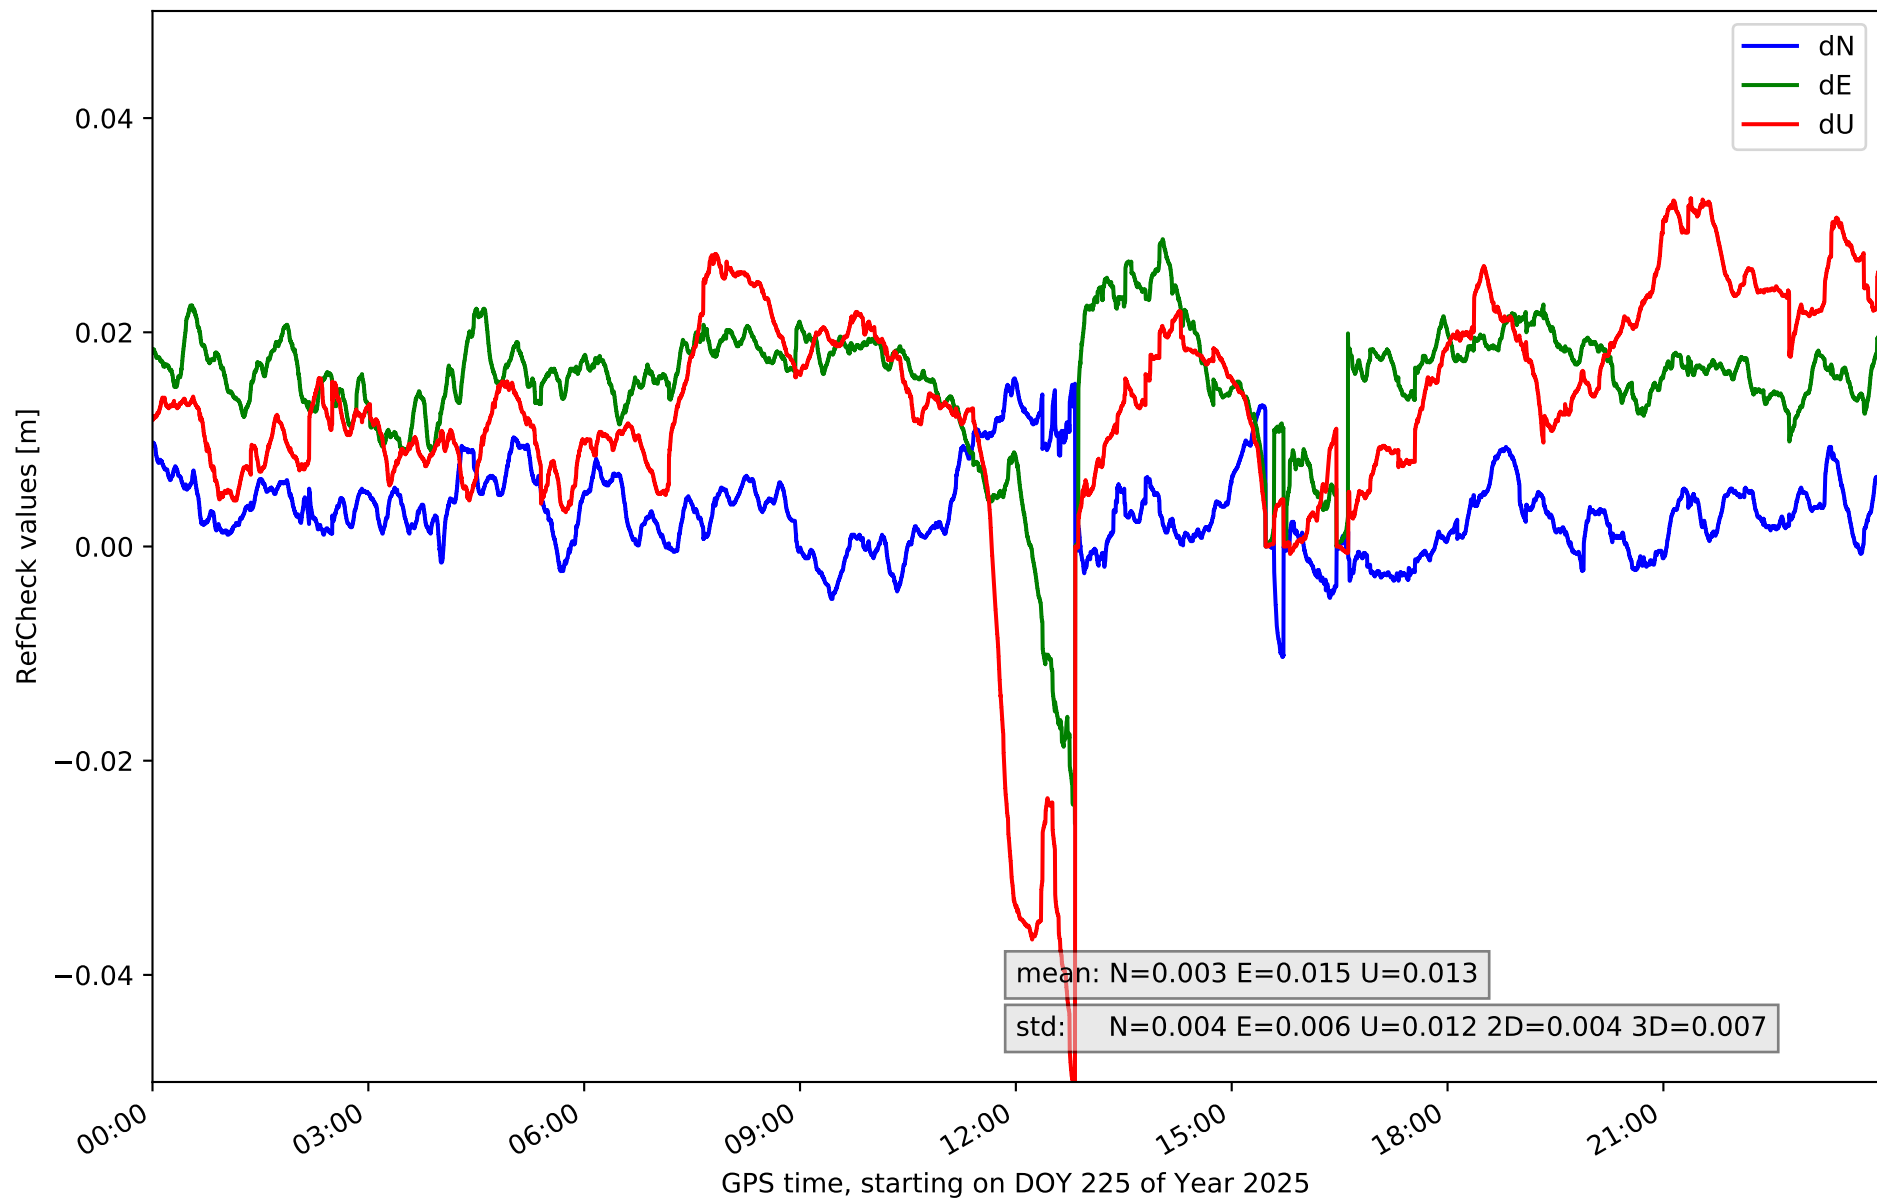


RefCheck for station GOM1 in network N32T

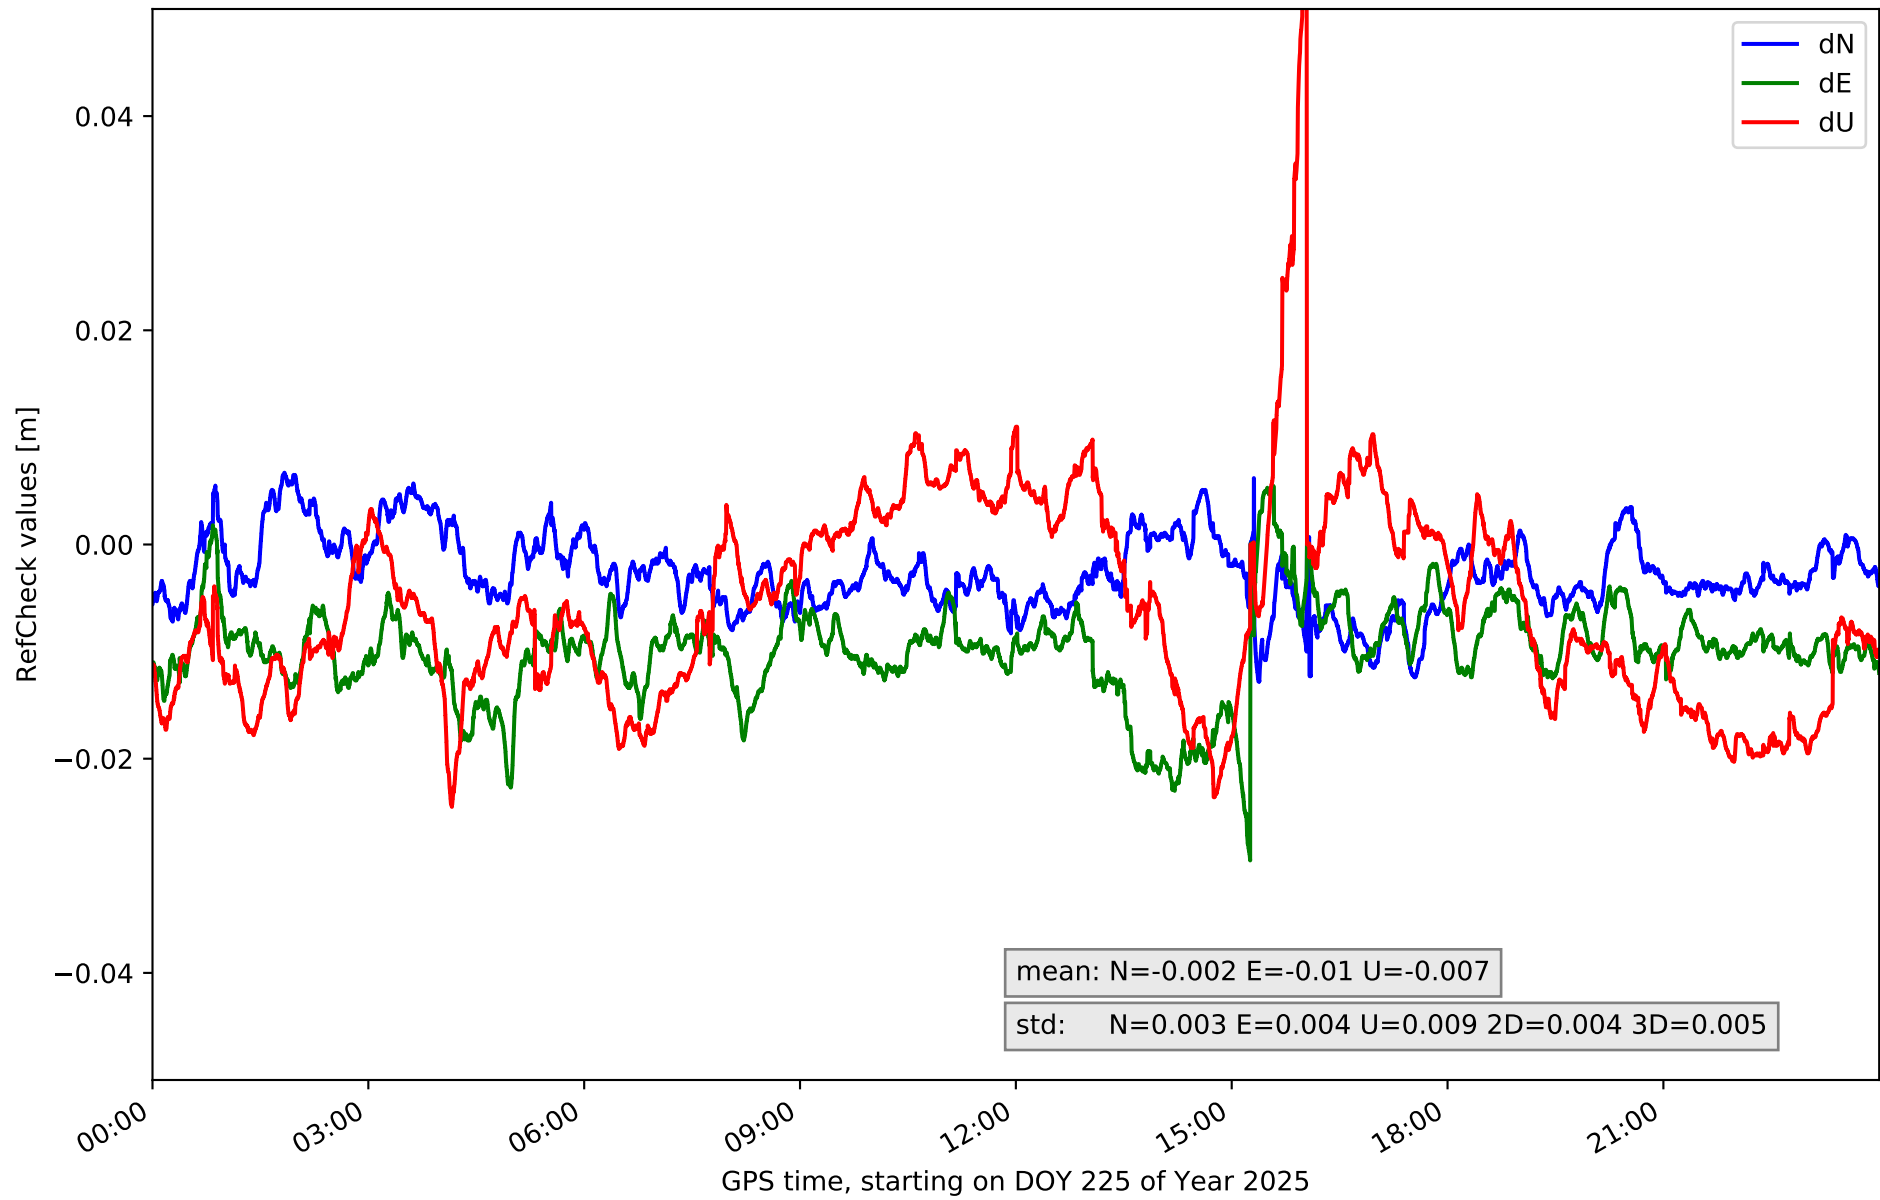


RefCheck for station IZAN in network N32T

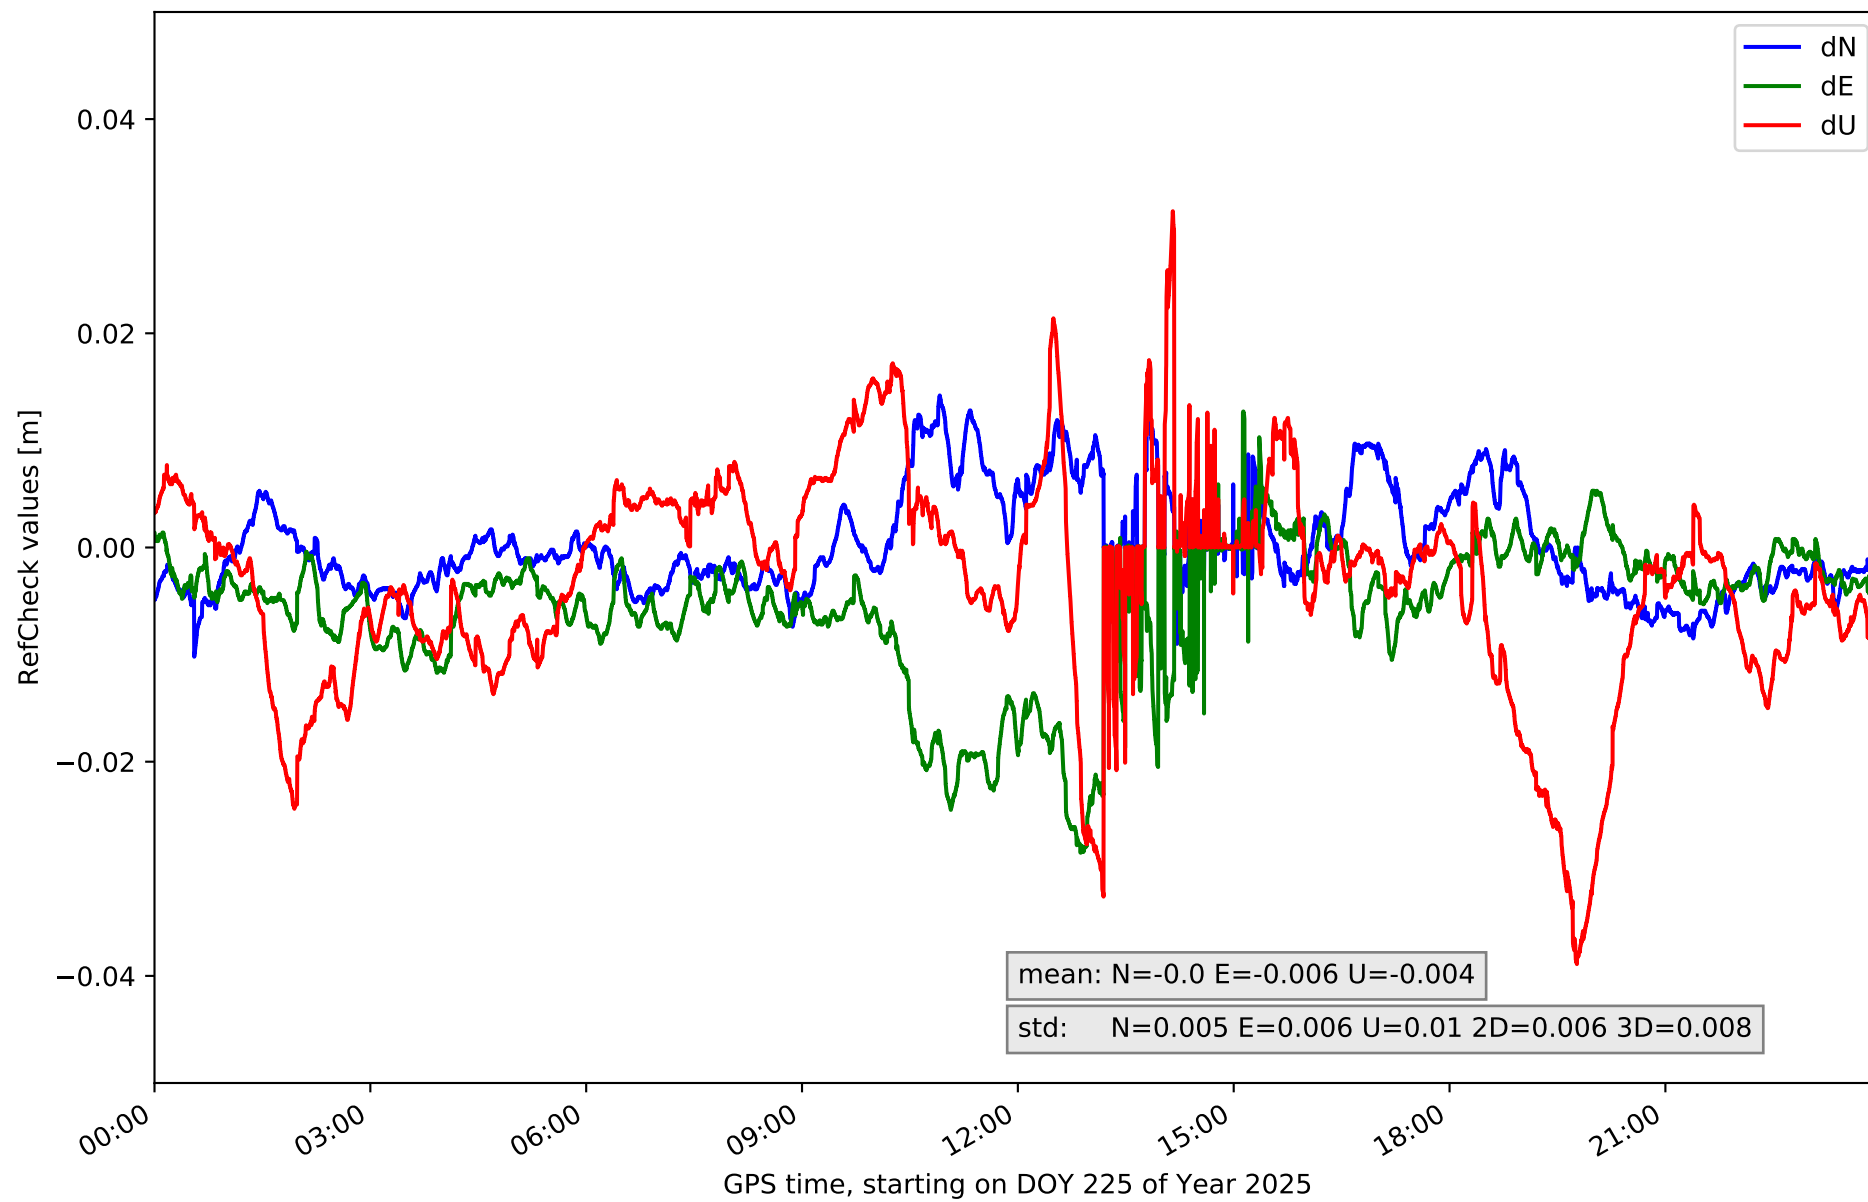


RefCheck for station LP01 in network N32T

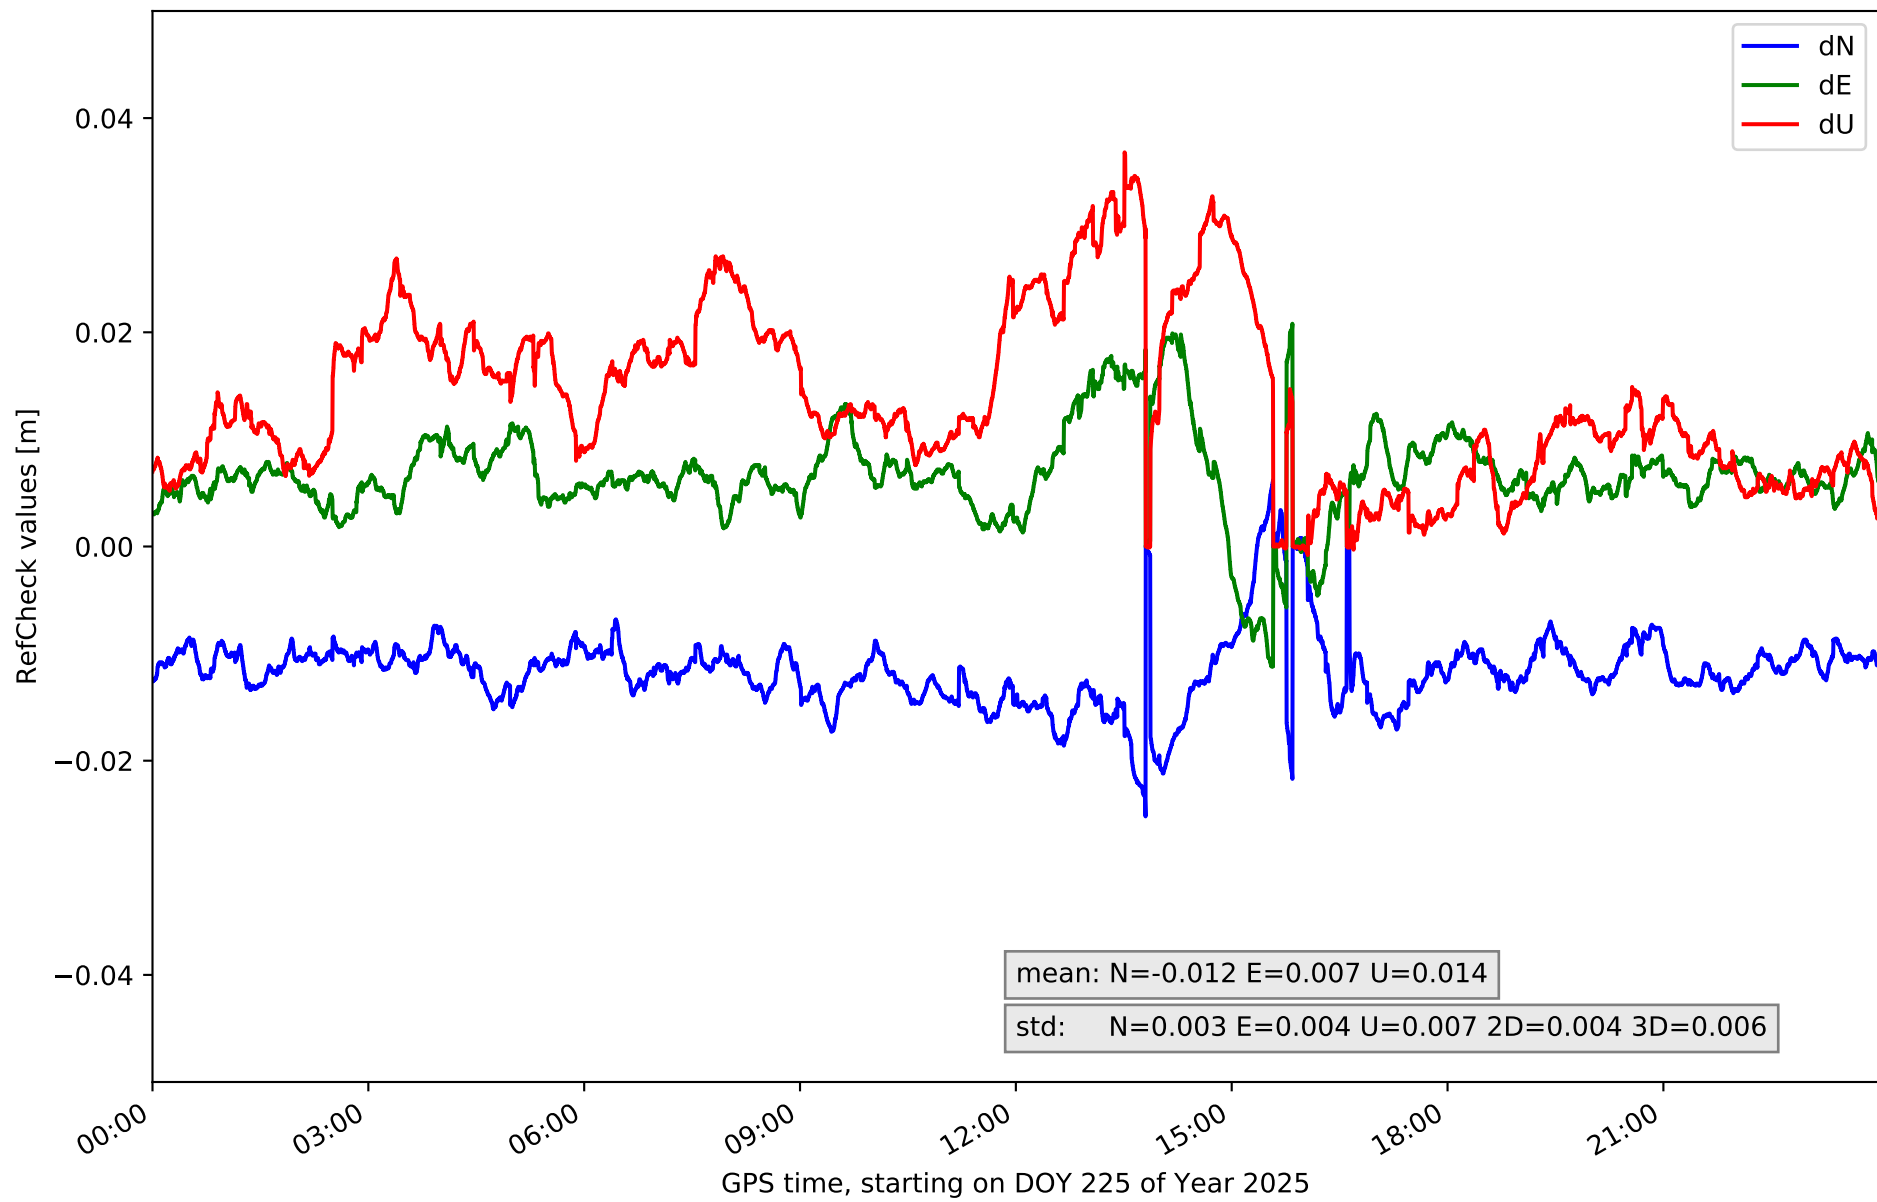


RefCheck for station LP03 in network N32T

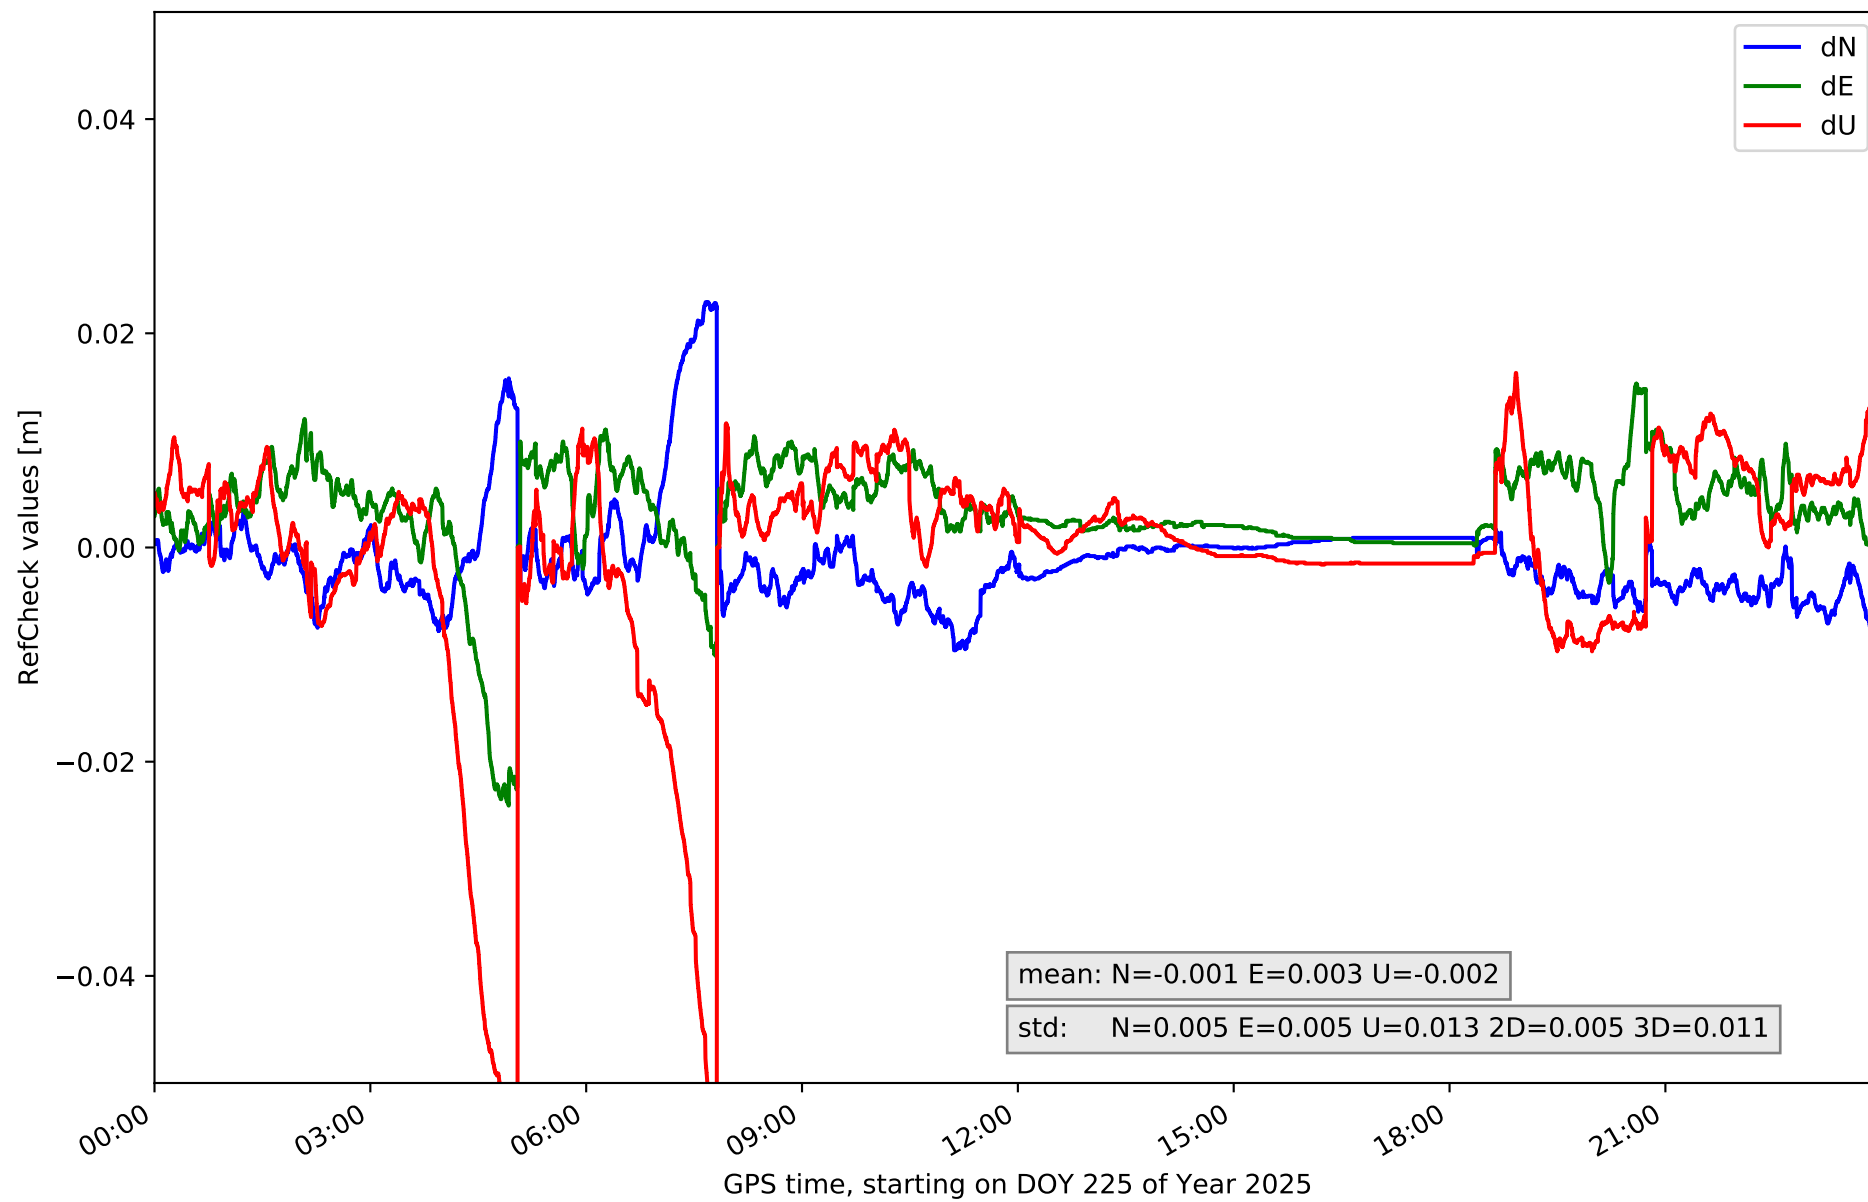


RefCheck for station LPAL in network N32T

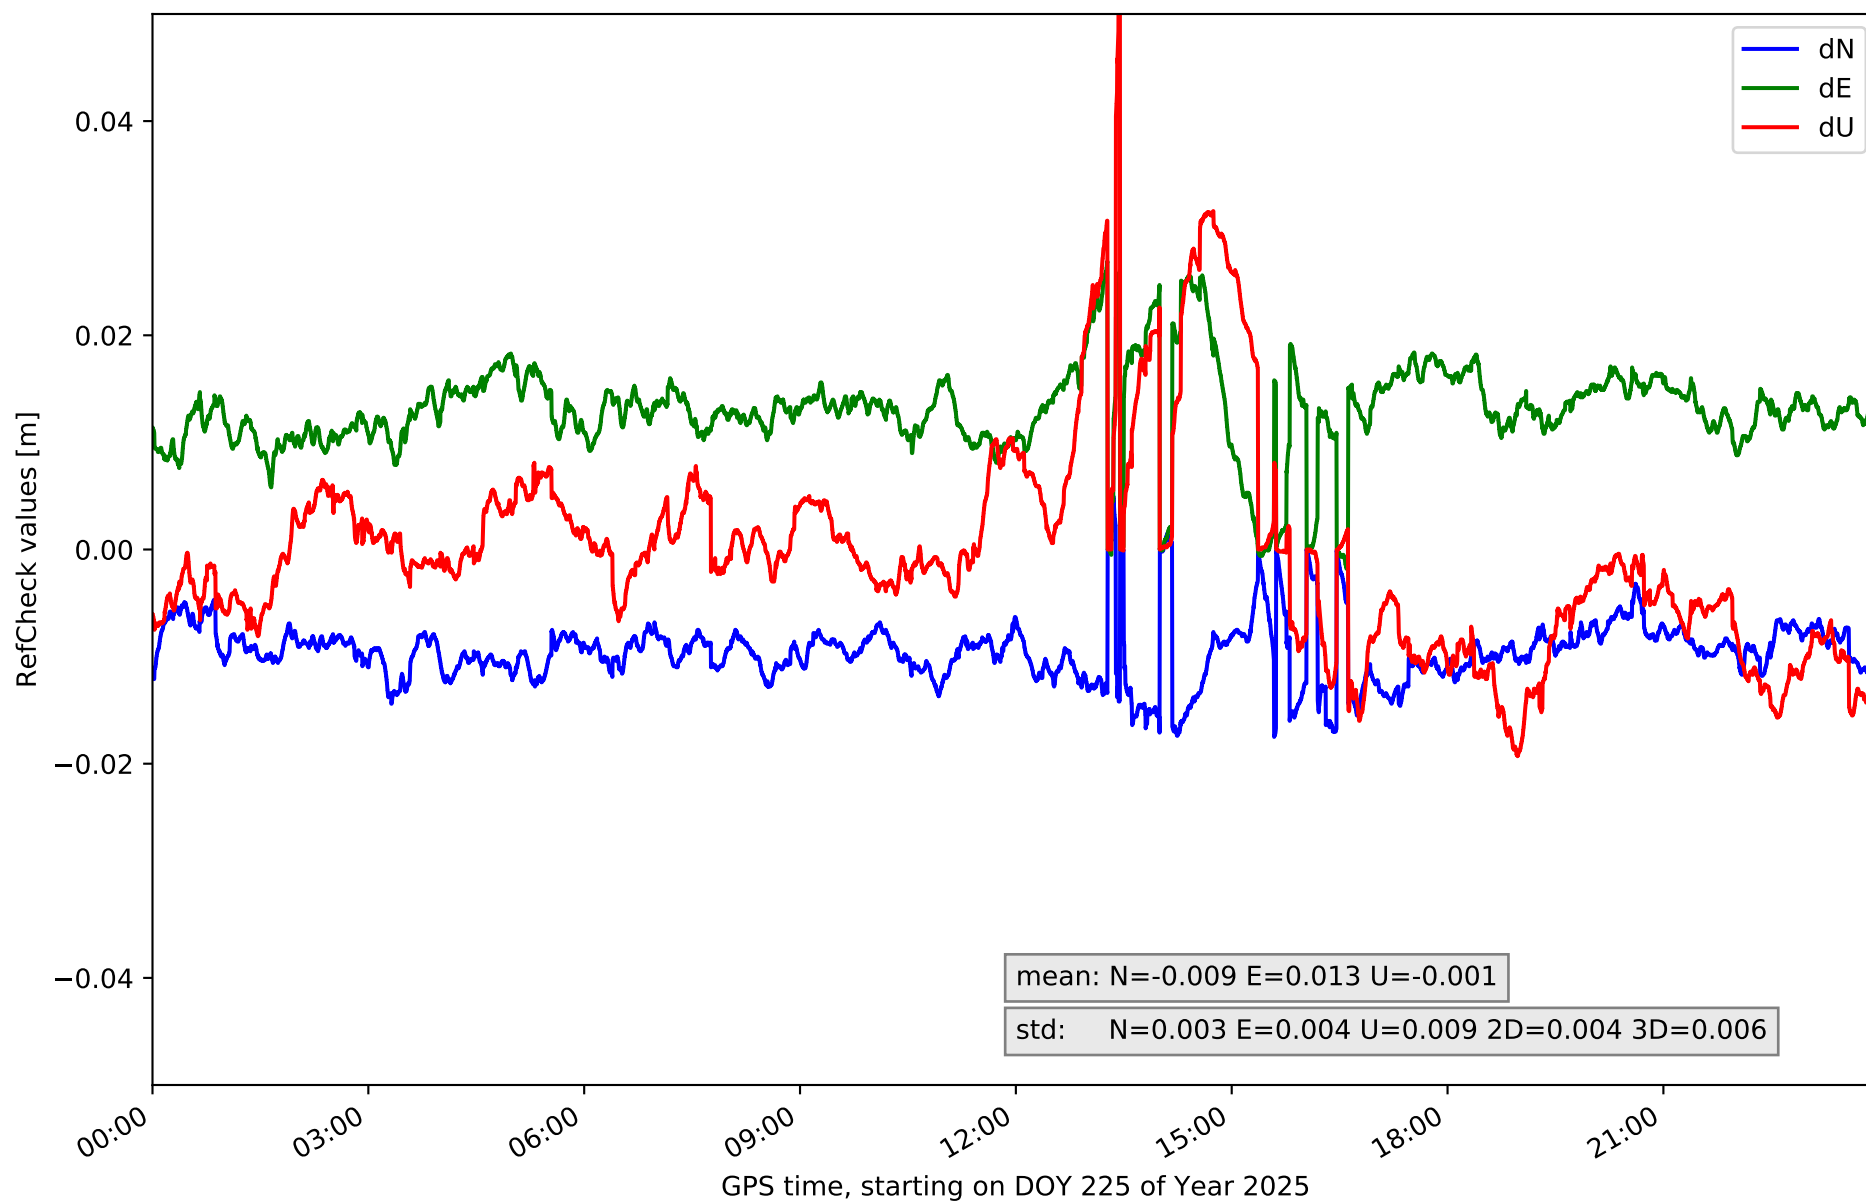


RefCheck for station LRES in network N32T

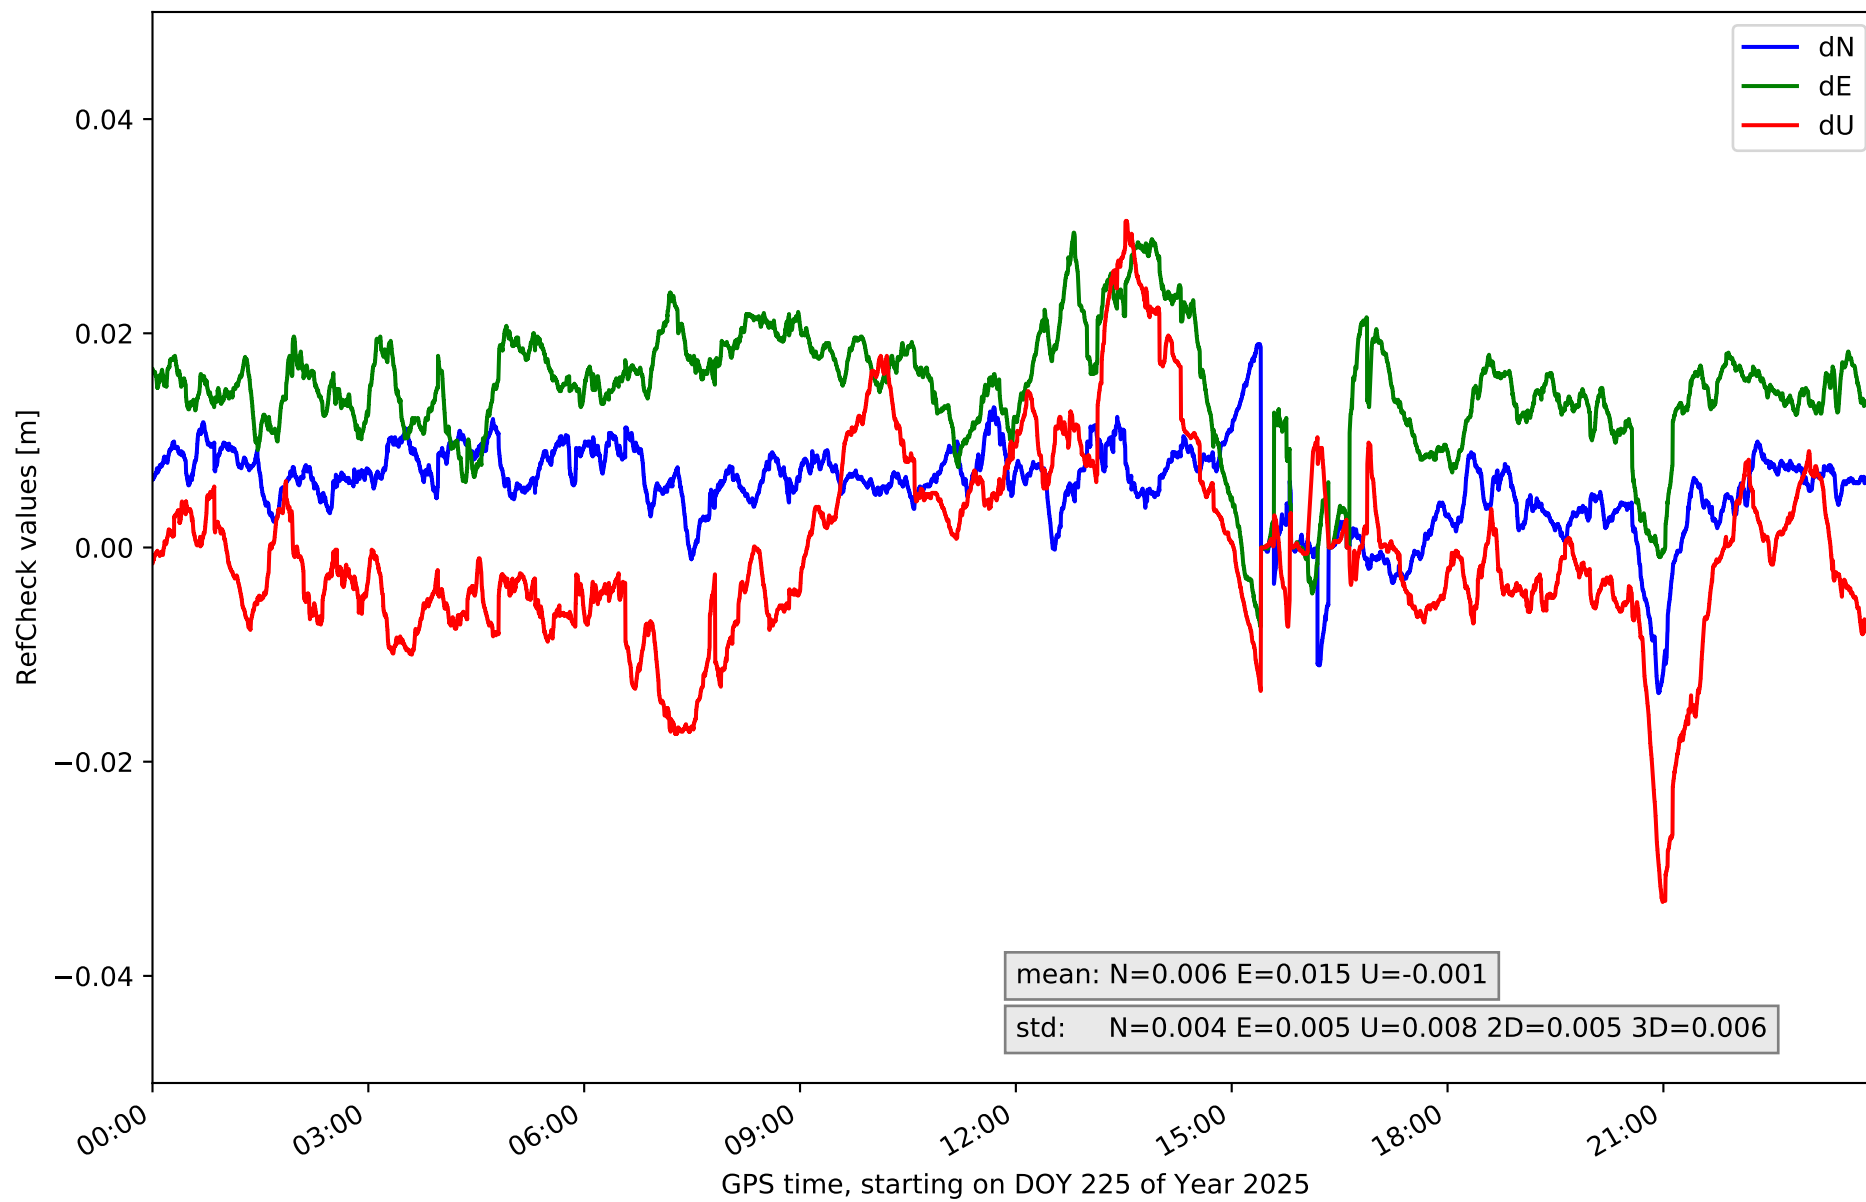


RefCheck for station TN01 in network N32T

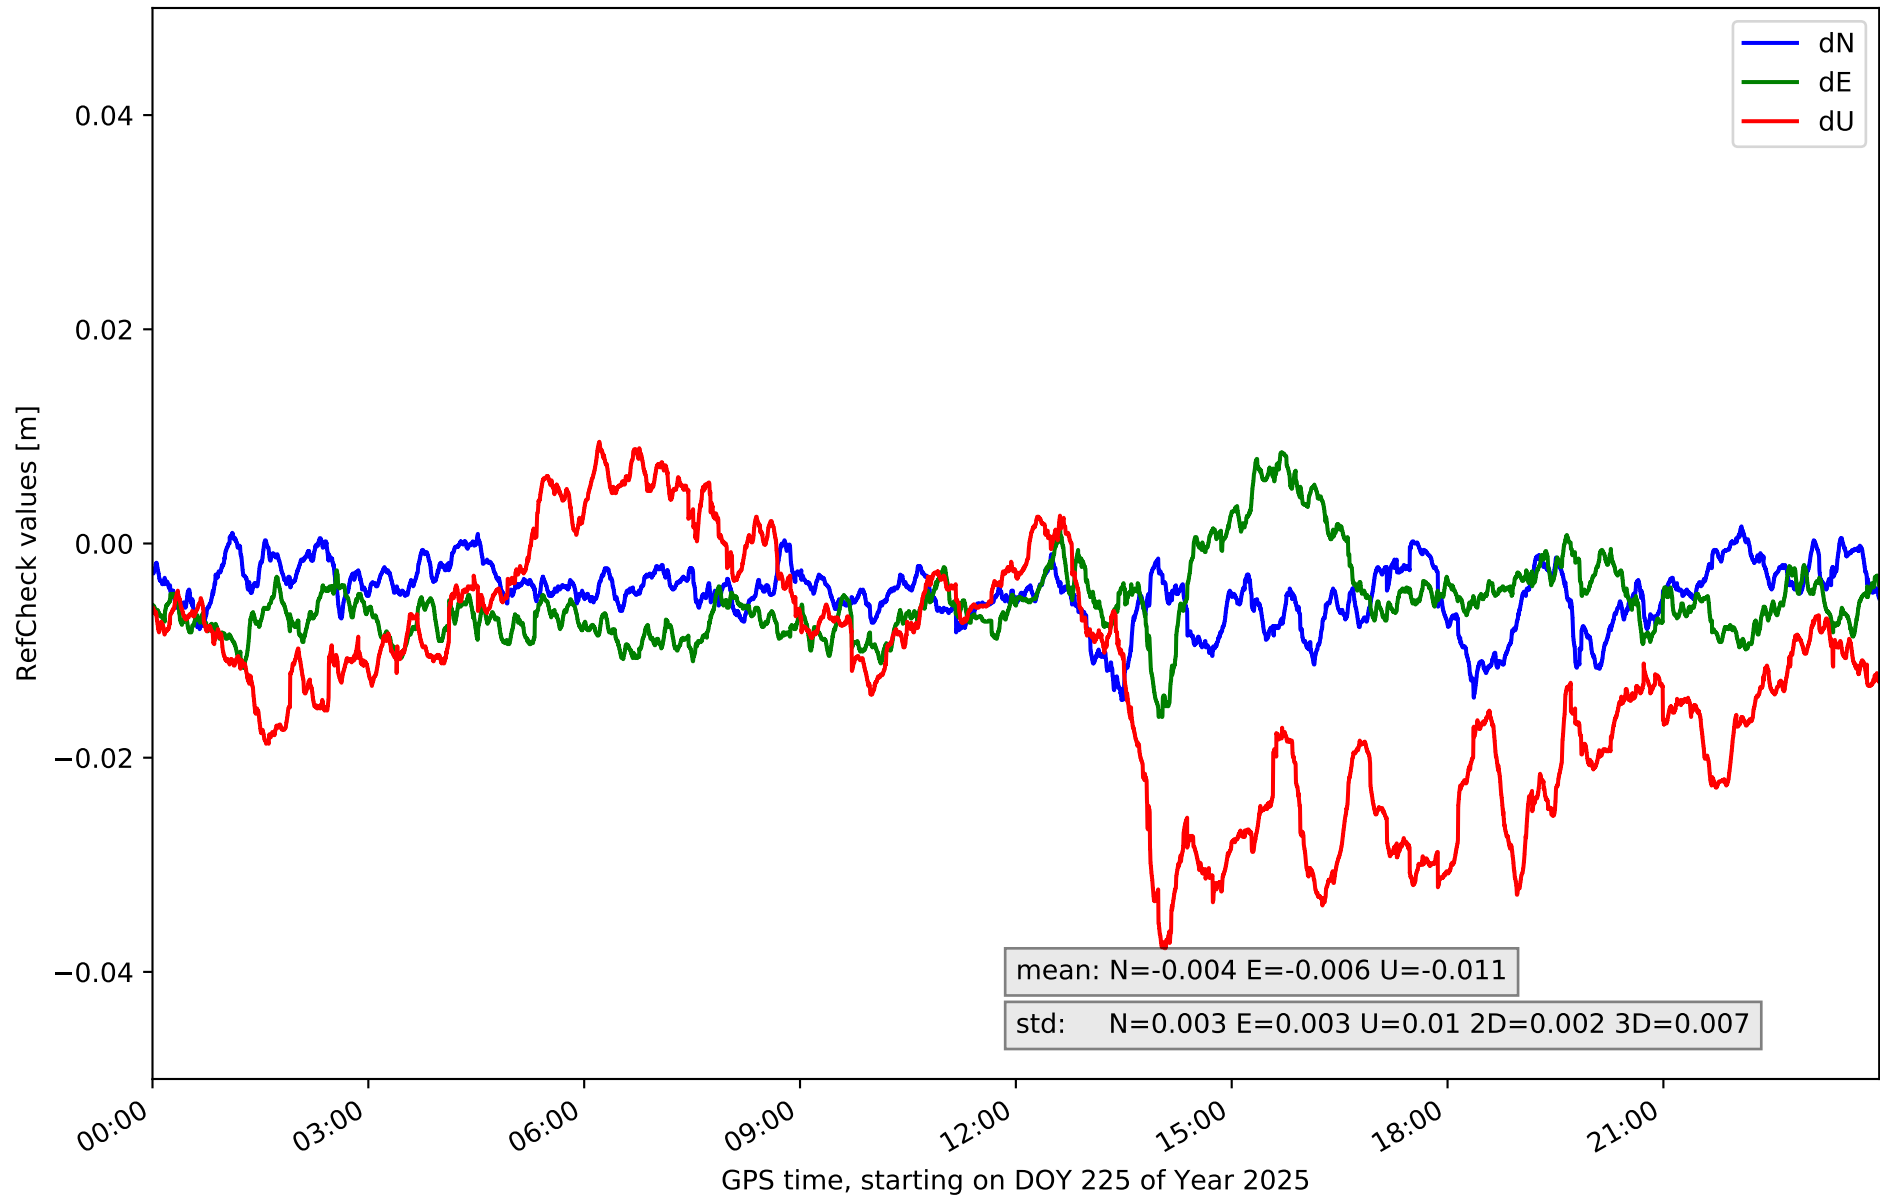


RefCheck for station TN02 in network N32T

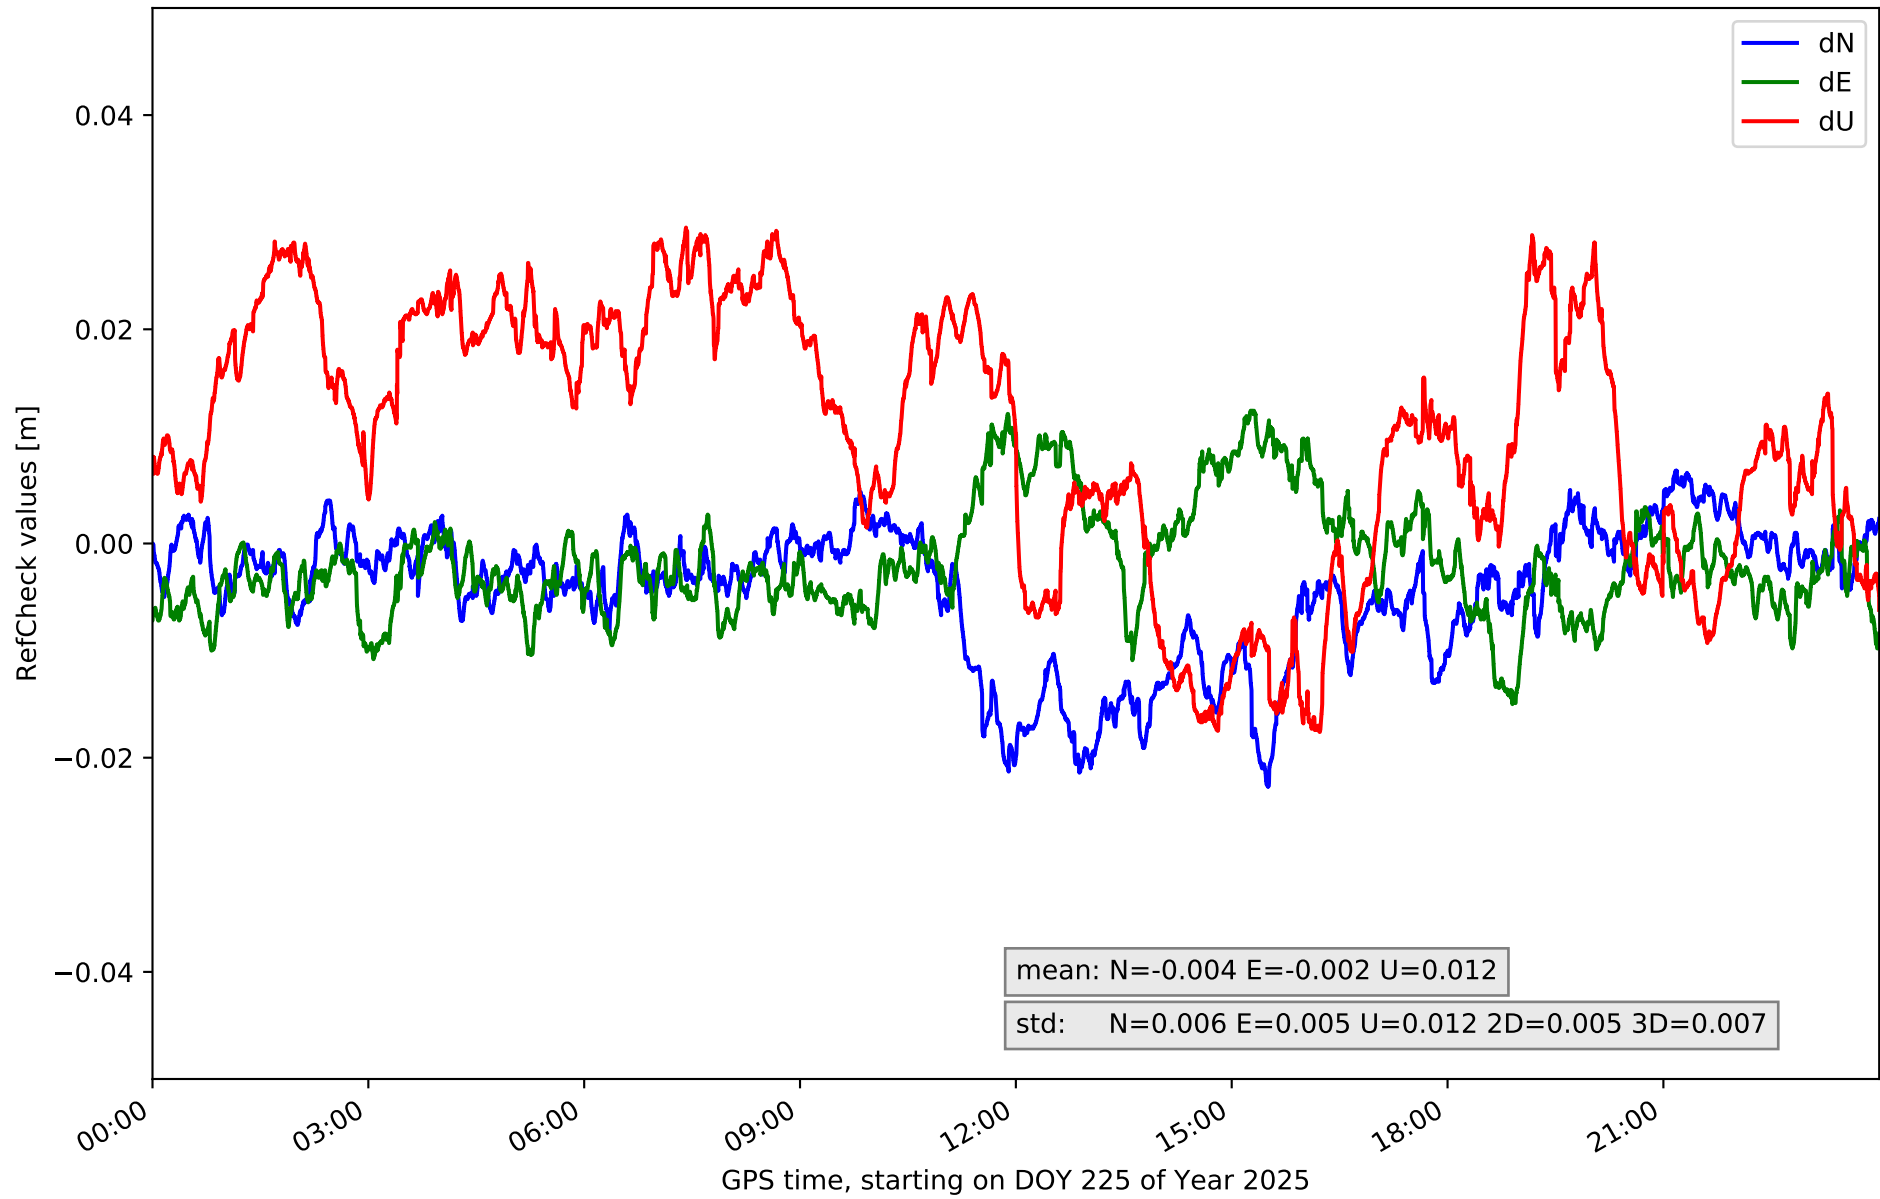


RefCheck for station TN03 in network N32T

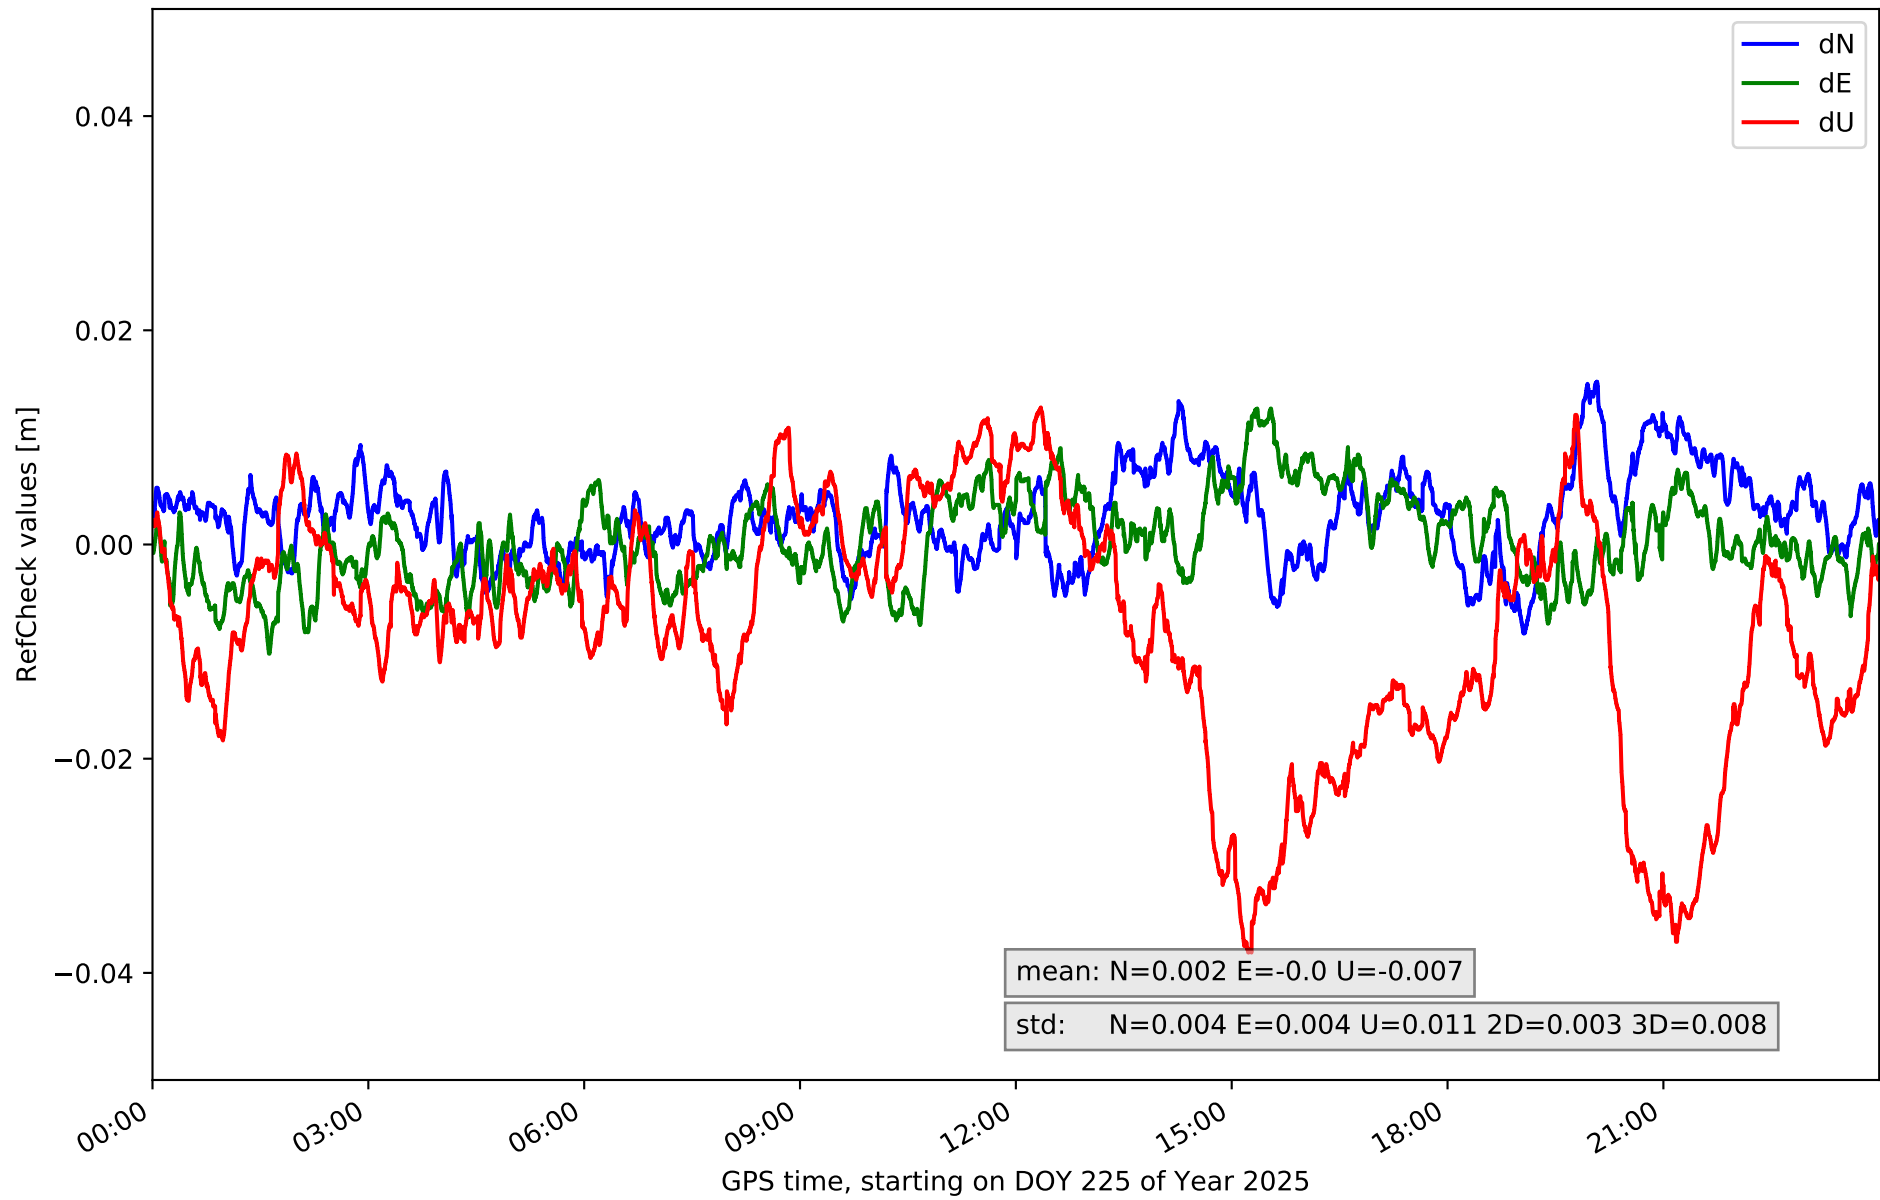


RefCheck for station TN04 in network N32T

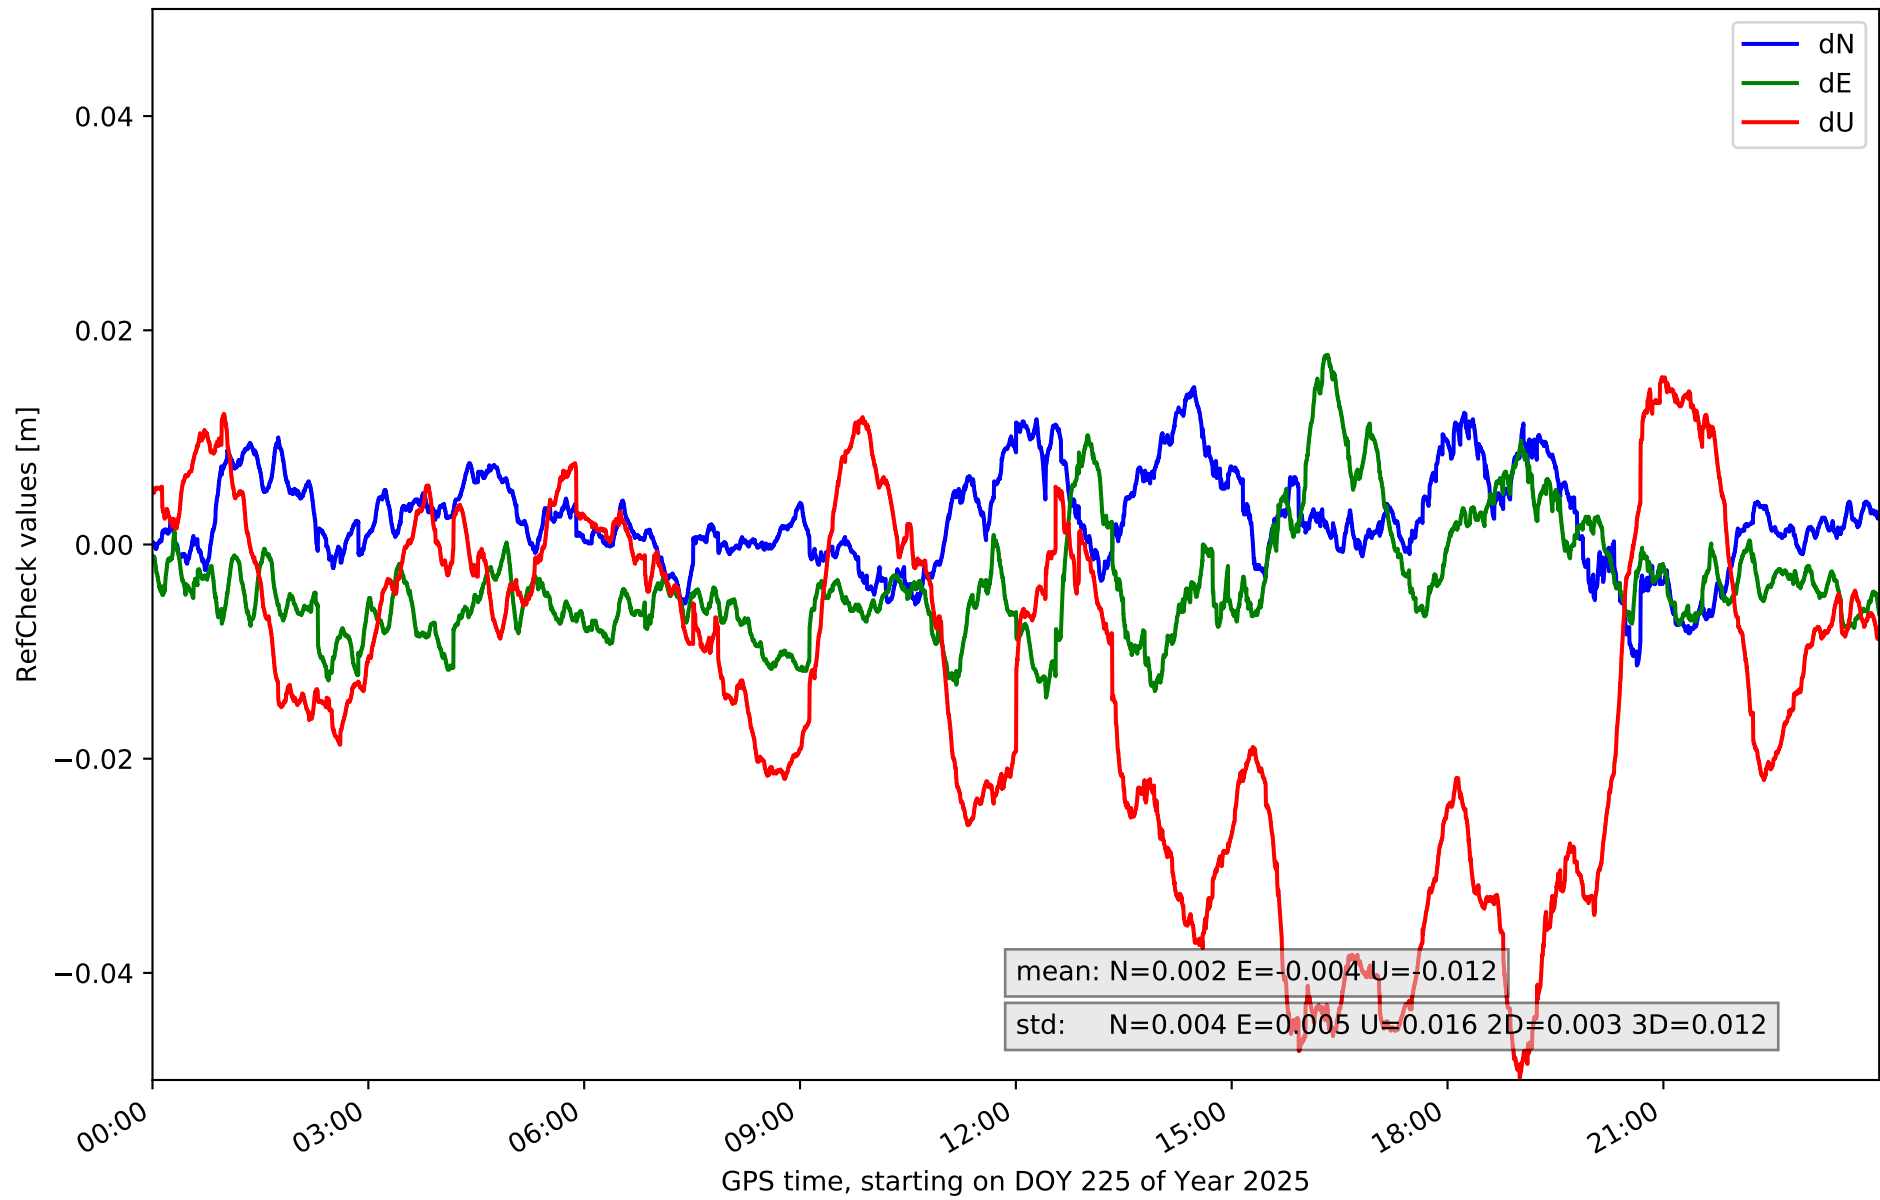


RefCheck for station TN06 in network N32T

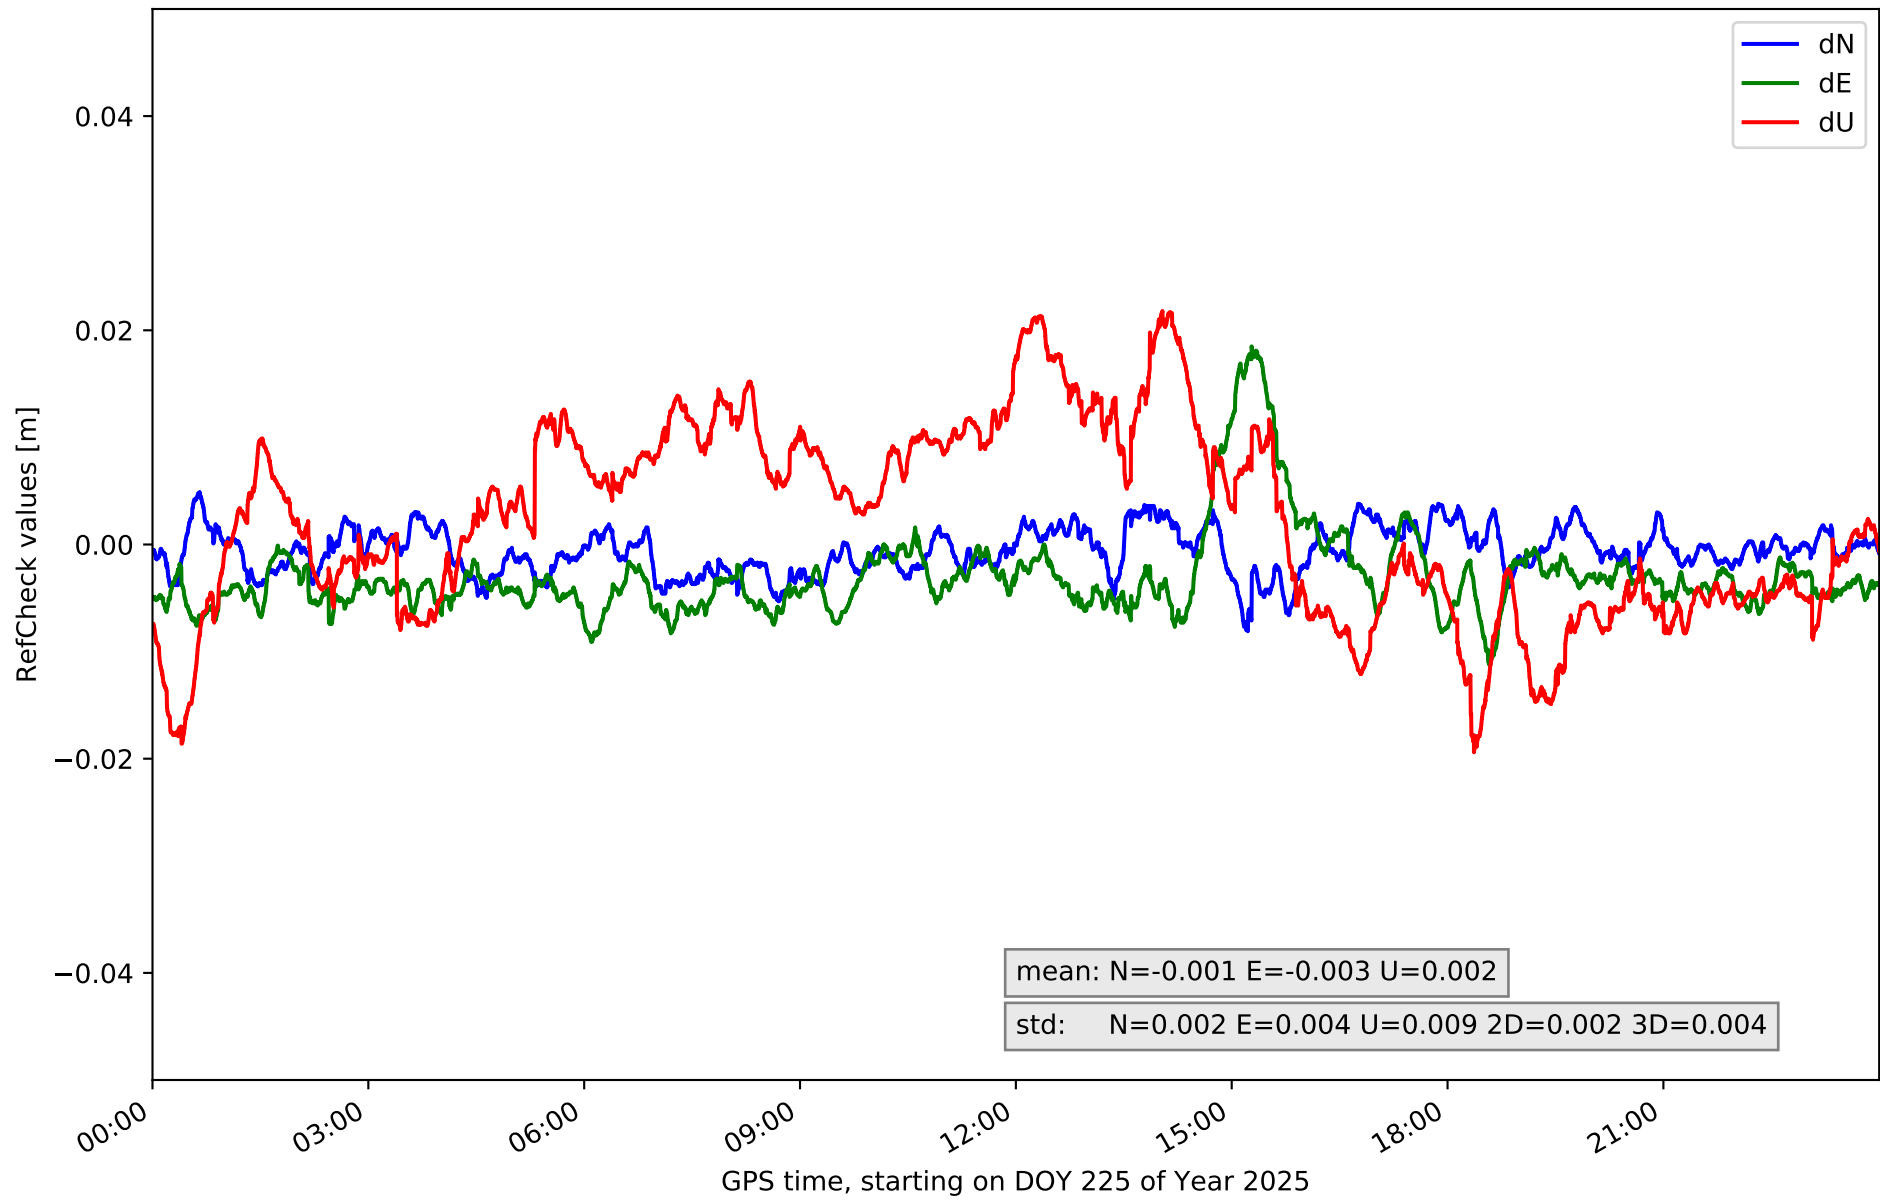

RefCheck for station TN09 in network N32T

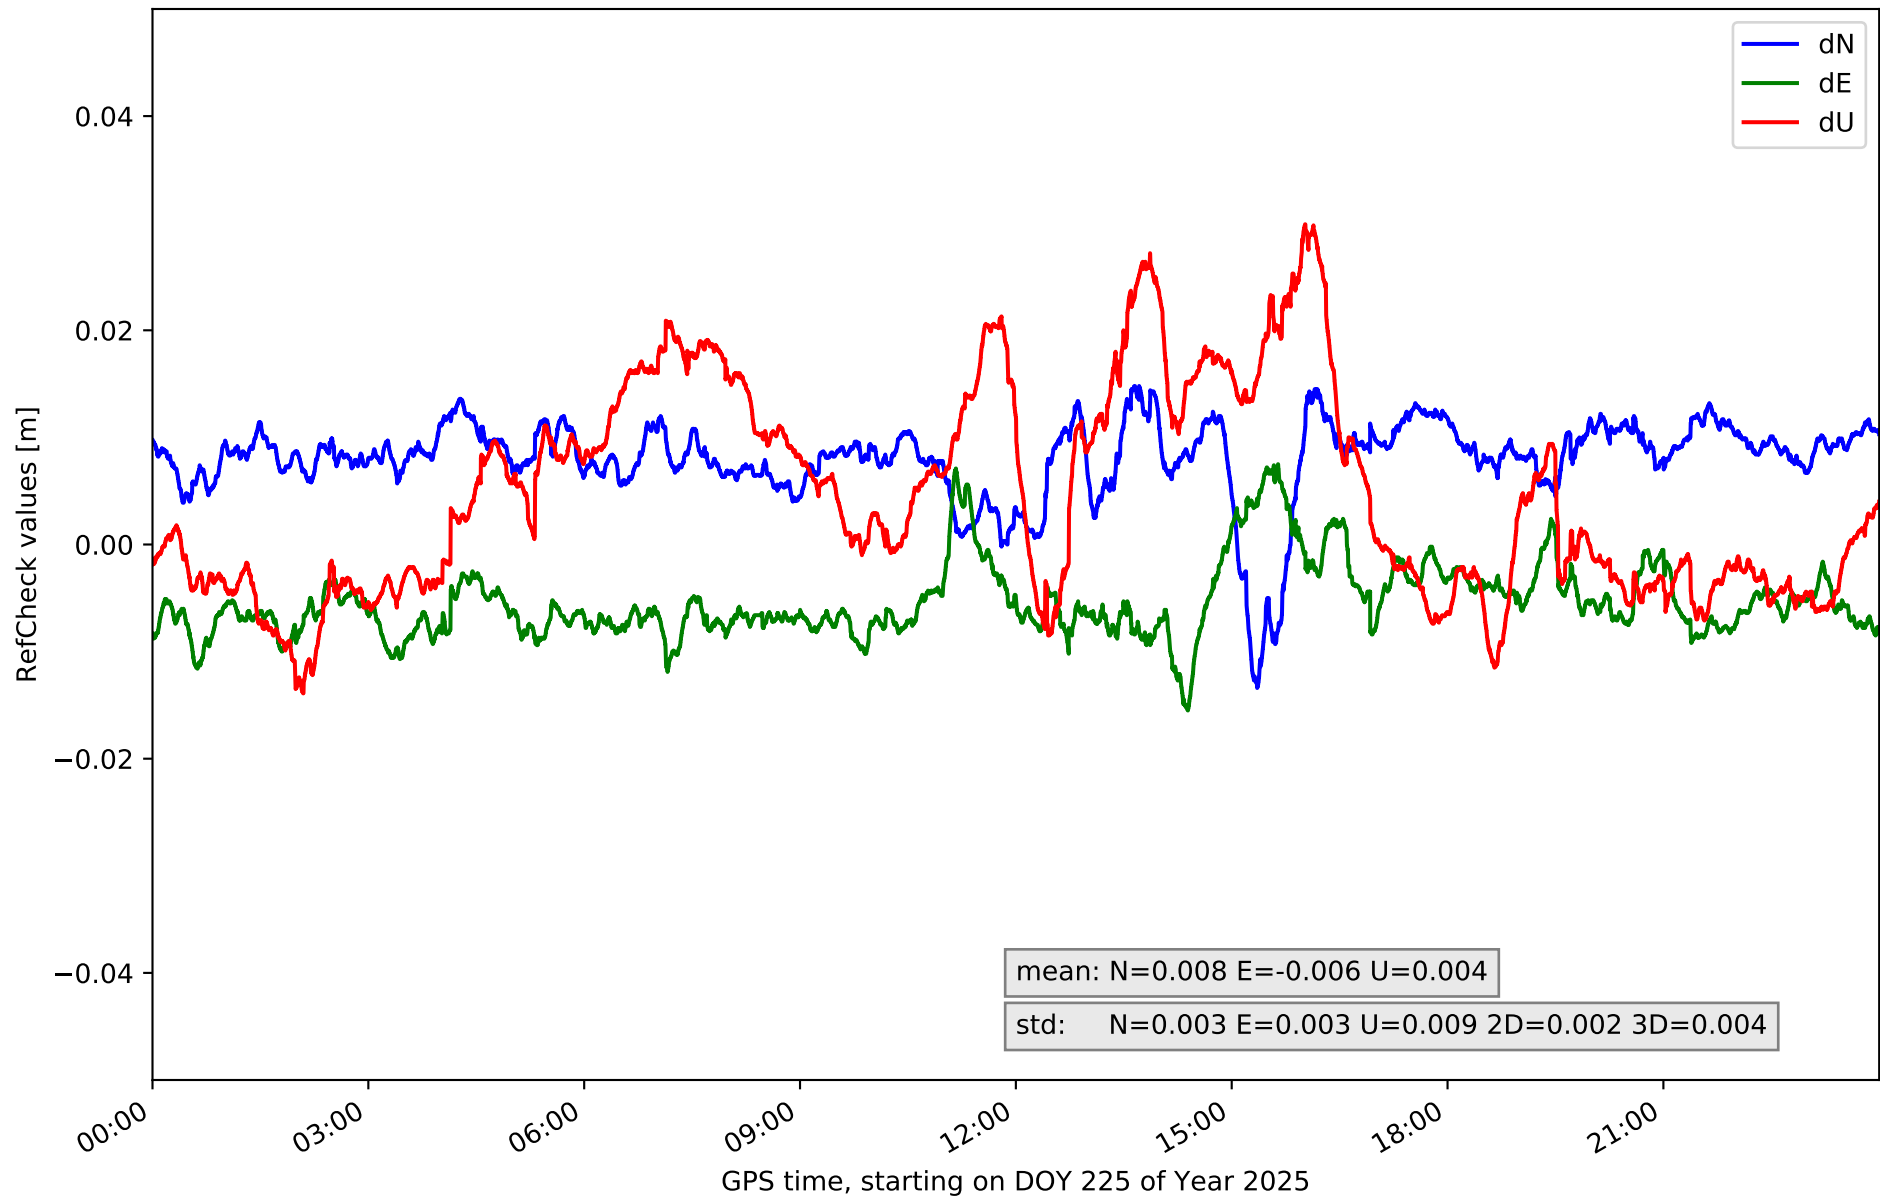

RefCheck for station TE11 in network N32T

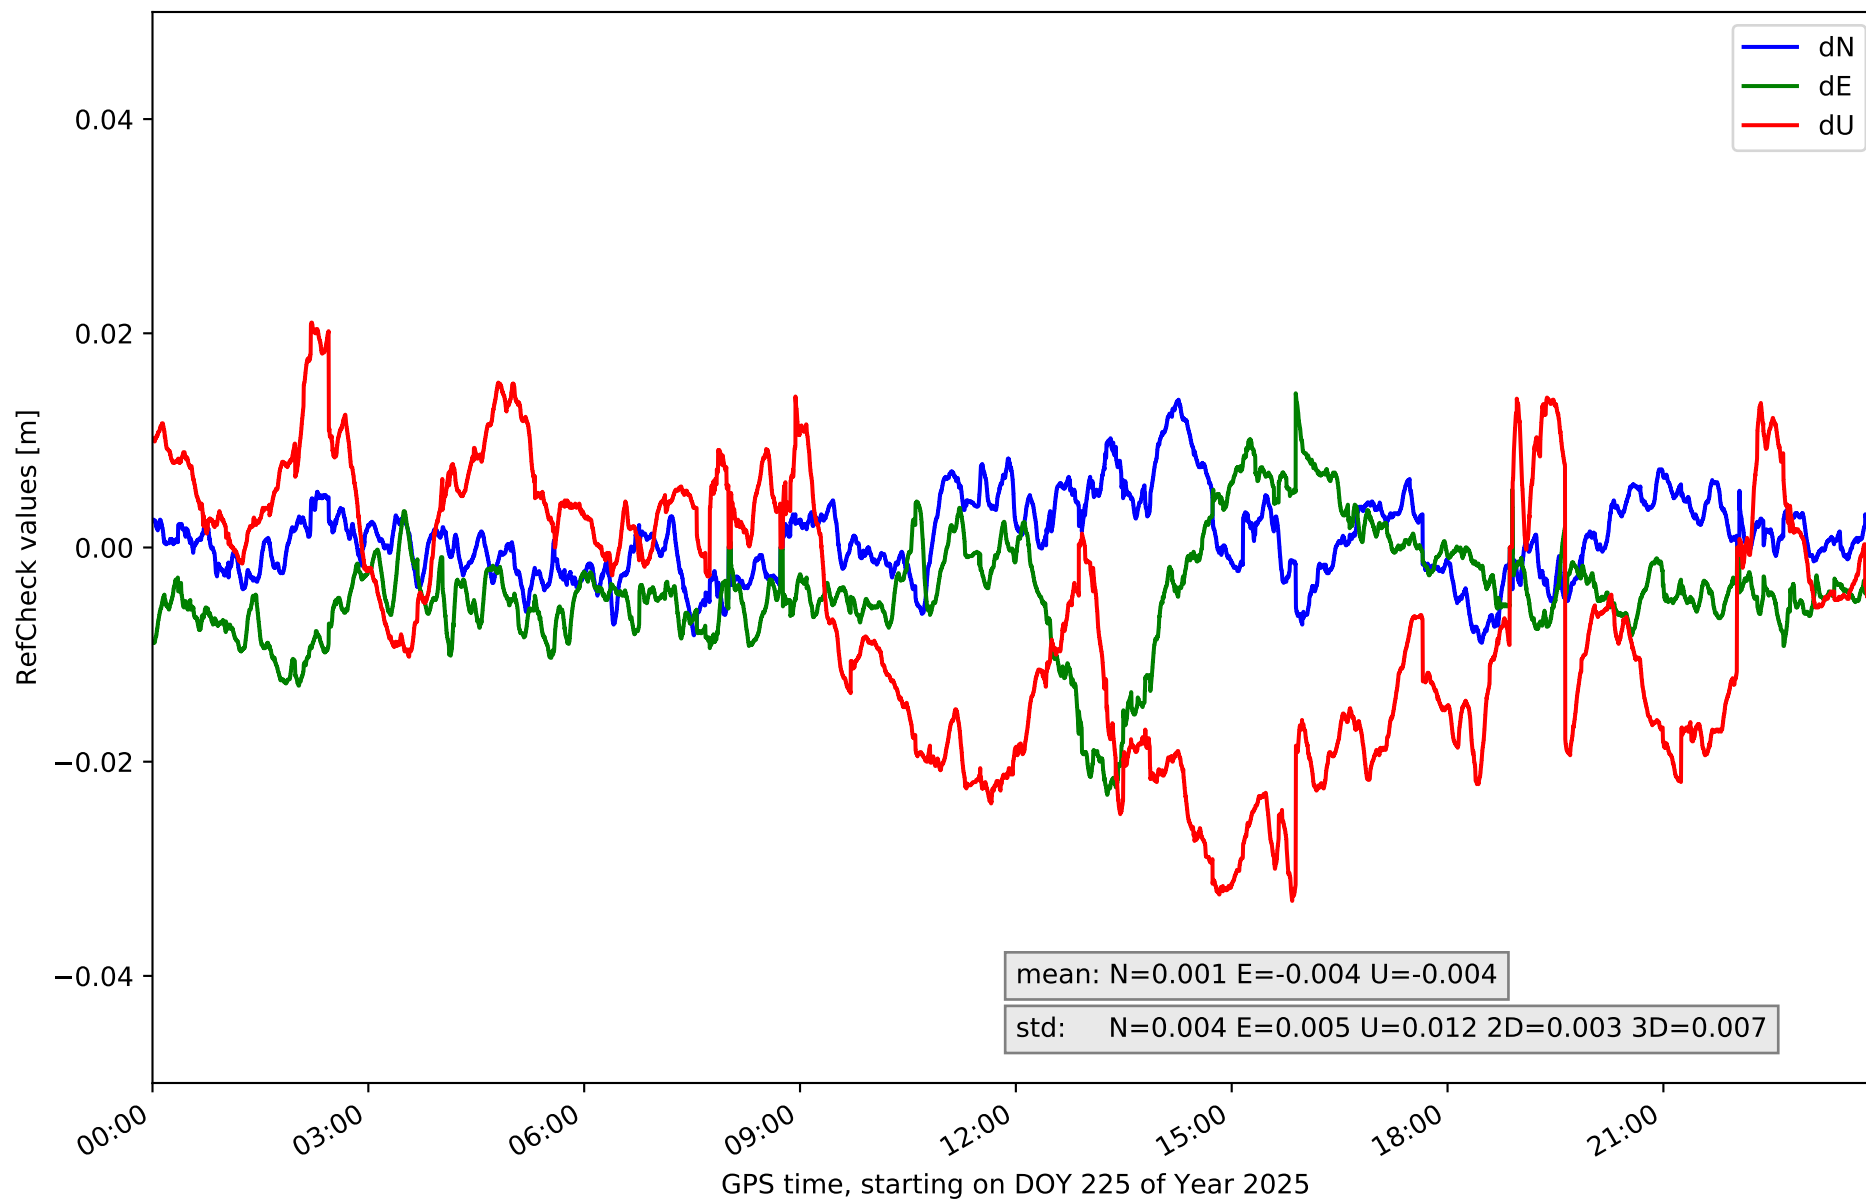

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.013	0.017	0.004	-0.0	0.03	0.004	-0.013	0.036	0.007	0.004	0.005	53672	97.5	24193	44.0
EH02	-0.01	0.016	0.004	-0.026	0.029	0.006	-0.052	0.033	0.012	0.004	0.007	52552	95.5	36413	66.2
GOM1	-0.013	0.007	0.003	-0.029	0.005	0.004	-0.025	0.06	0.009	0.004	0.005	33001	60.0	10666	19.4
IZAN	-0.01	0.015	0.005	-0.029	0.013	0.006	-0.039	0.031	0.01	0.006	0.008	10477	19.0	8851	16.1
LP01	-0.025	0.006	0.003	-0.011	0.021	0.004	-0.001	0.037	0.007	0.004	0.006	51255	93.1	23373	42.5
LP03	-0.01	0.023	0.005	-0.024	0.015	0.005	-0.06	0.016	0.013	0.005	0.011	5679	10.3	4337	7.9
LPAL	-0.018	0.005	0.003	-0.002	0.027	0.004	-0.019	0.06	0.009	0.004	0.006	52974	96.3	13405	24.4
LRES	-0.014	0.019	0.004	-0.007	0.029	0.005	-0.033	0.03	0.008	0.005	0.006	51590	93.8	17076	31.0
TN01	-0.015	0.002	0.003	-0.016	0.009	0.003	-0.038	0.009	0.01	0.002	0.007	10730	19.5	12859	23.4
TN02	-0.023	0.007	0.006	-0.015	0.012	0.005	-0.018	0.029	0.012	0.005	0.007	11026	20.0	22143	40.2
TN03	-0.008	0.015	0.004	-0.01	0.013	0.004	-0.038	0.013	0.011	0.003	0.008	3710	6.7	6621	12.0
TN04	-0.011	0.015	0.004	-0.014	0.018	0.005	-0.05	0.016	0.016	0.003	0.012	12042	21.9	18068	32.8
TN06	-0.008	0.005	0.002	-0.011	0.018	0.004	-0.019	0.022	0.009	0.002	0.004	1318	2.4	1462	2.7
TN09	-0.013	0.015	0.003	-0.015	0.007	0.003	-0.014	0.03	0.009	0.002	0.004	35755	65.0	7150	13.0
TE11	-0.009	0.014	0.004	-0.023	0.014	0.005	-0.033	0.021	0.012	0.003	0.007	6177	11.2	10313	18.7
Mean	-0.013	0.012	0.004	-0.015	0.017	0.004	-0.03	0.03	0.01	0.004	0.007	26130.5	47.5	14462.0	26.3
Min/Max	-0.025	0.023	0.006	-0.029	0.03	0.006	-0.06	0.06	0.016	0.006	0.012	53672	97.5	36413	66.2

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	93.2	93.3	92.7	94.0	92.2
considering satellites with dual-frequency fixed	89.7	89.9	86.9	91.5	89.8
considering all signals separately	89.8	89.9	87.0	91.8	88.1