

summary for network N32T

timeperiod chosen: from 2025-08-17-00:00:00 until 2025-08-17-23:59:58

average update rate (durations larger than 15 seconds considered as observation gap): 1.5 seconds


average fixing percentage with threshold set to 0.3: 93.6 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

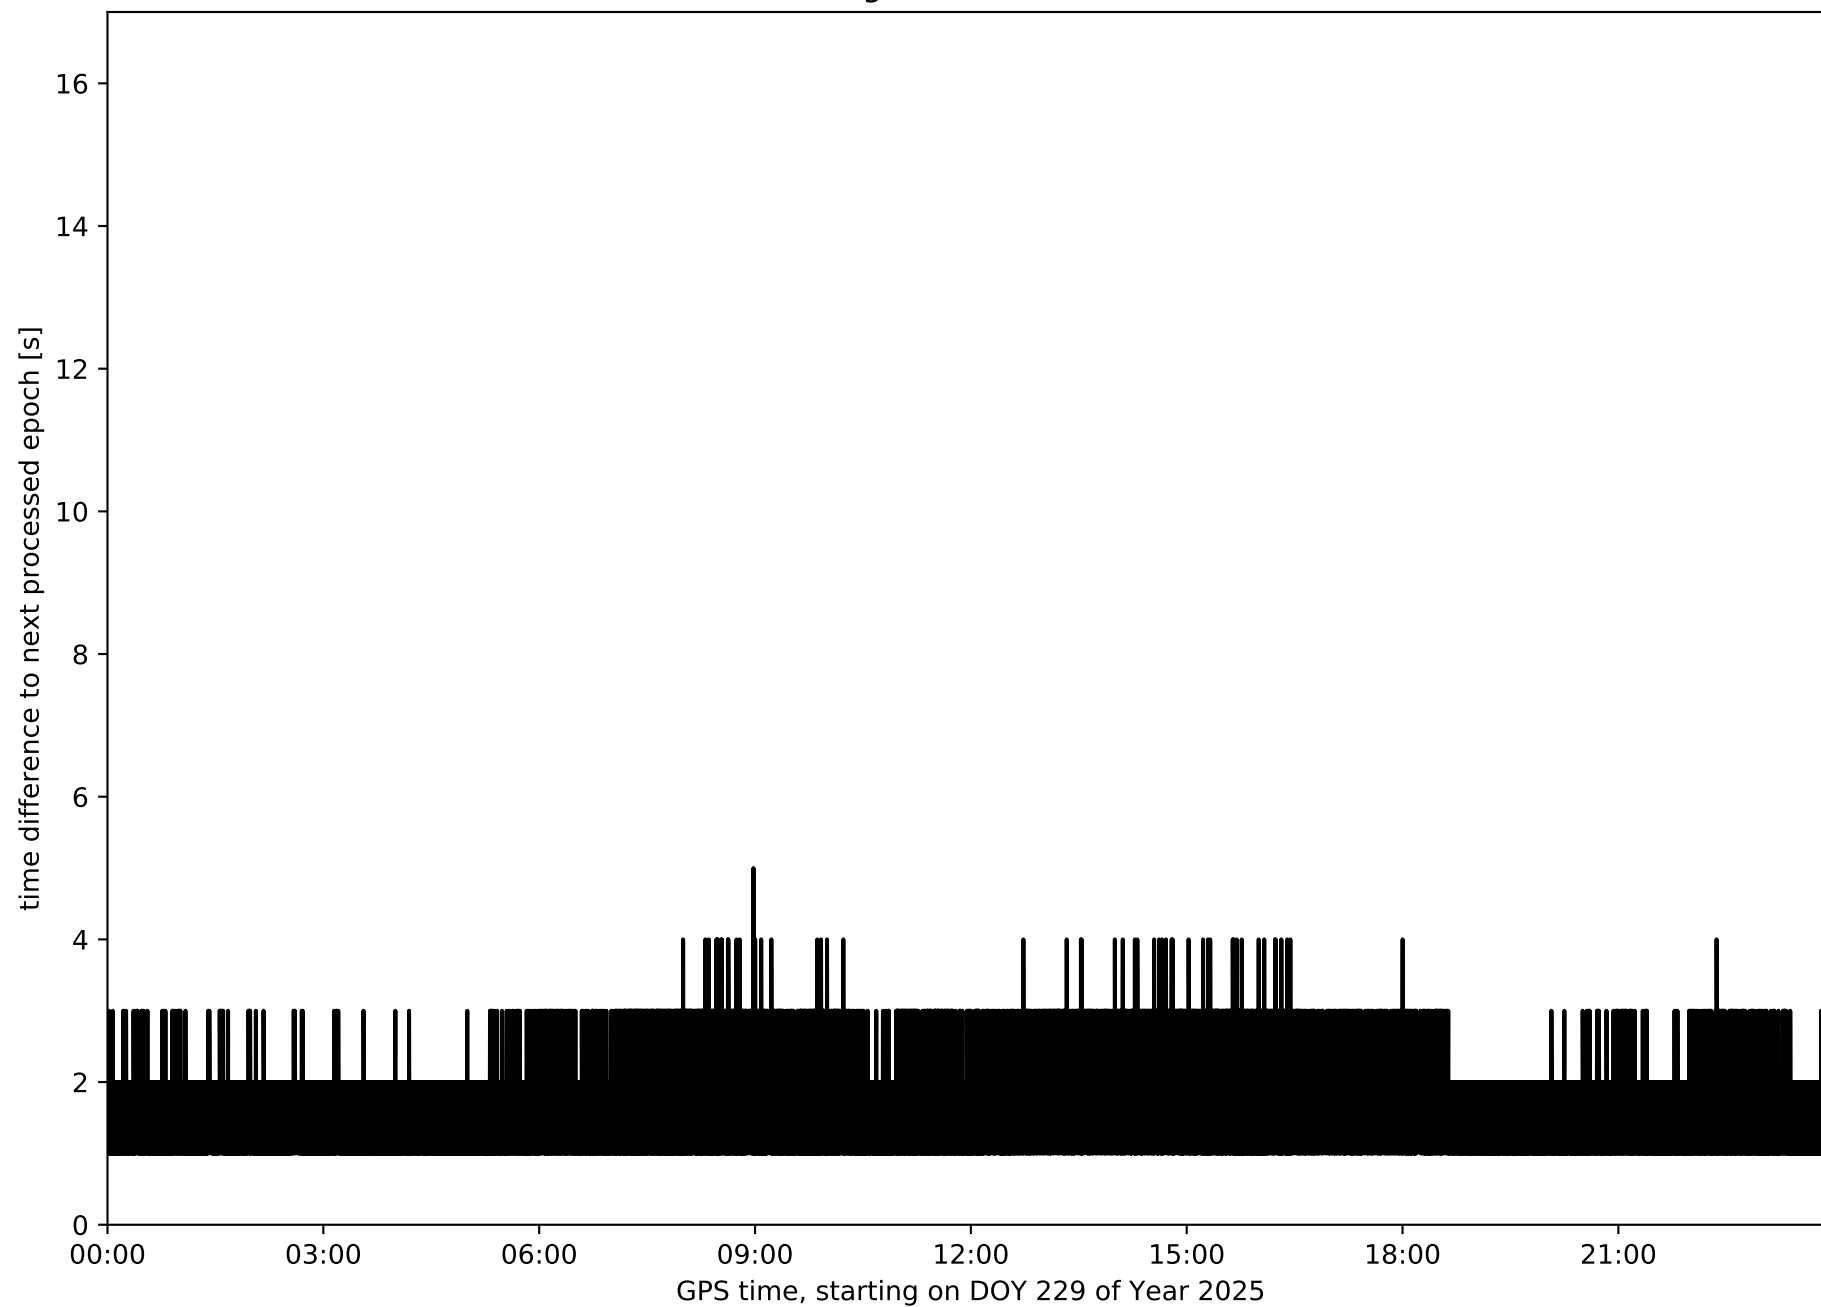


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

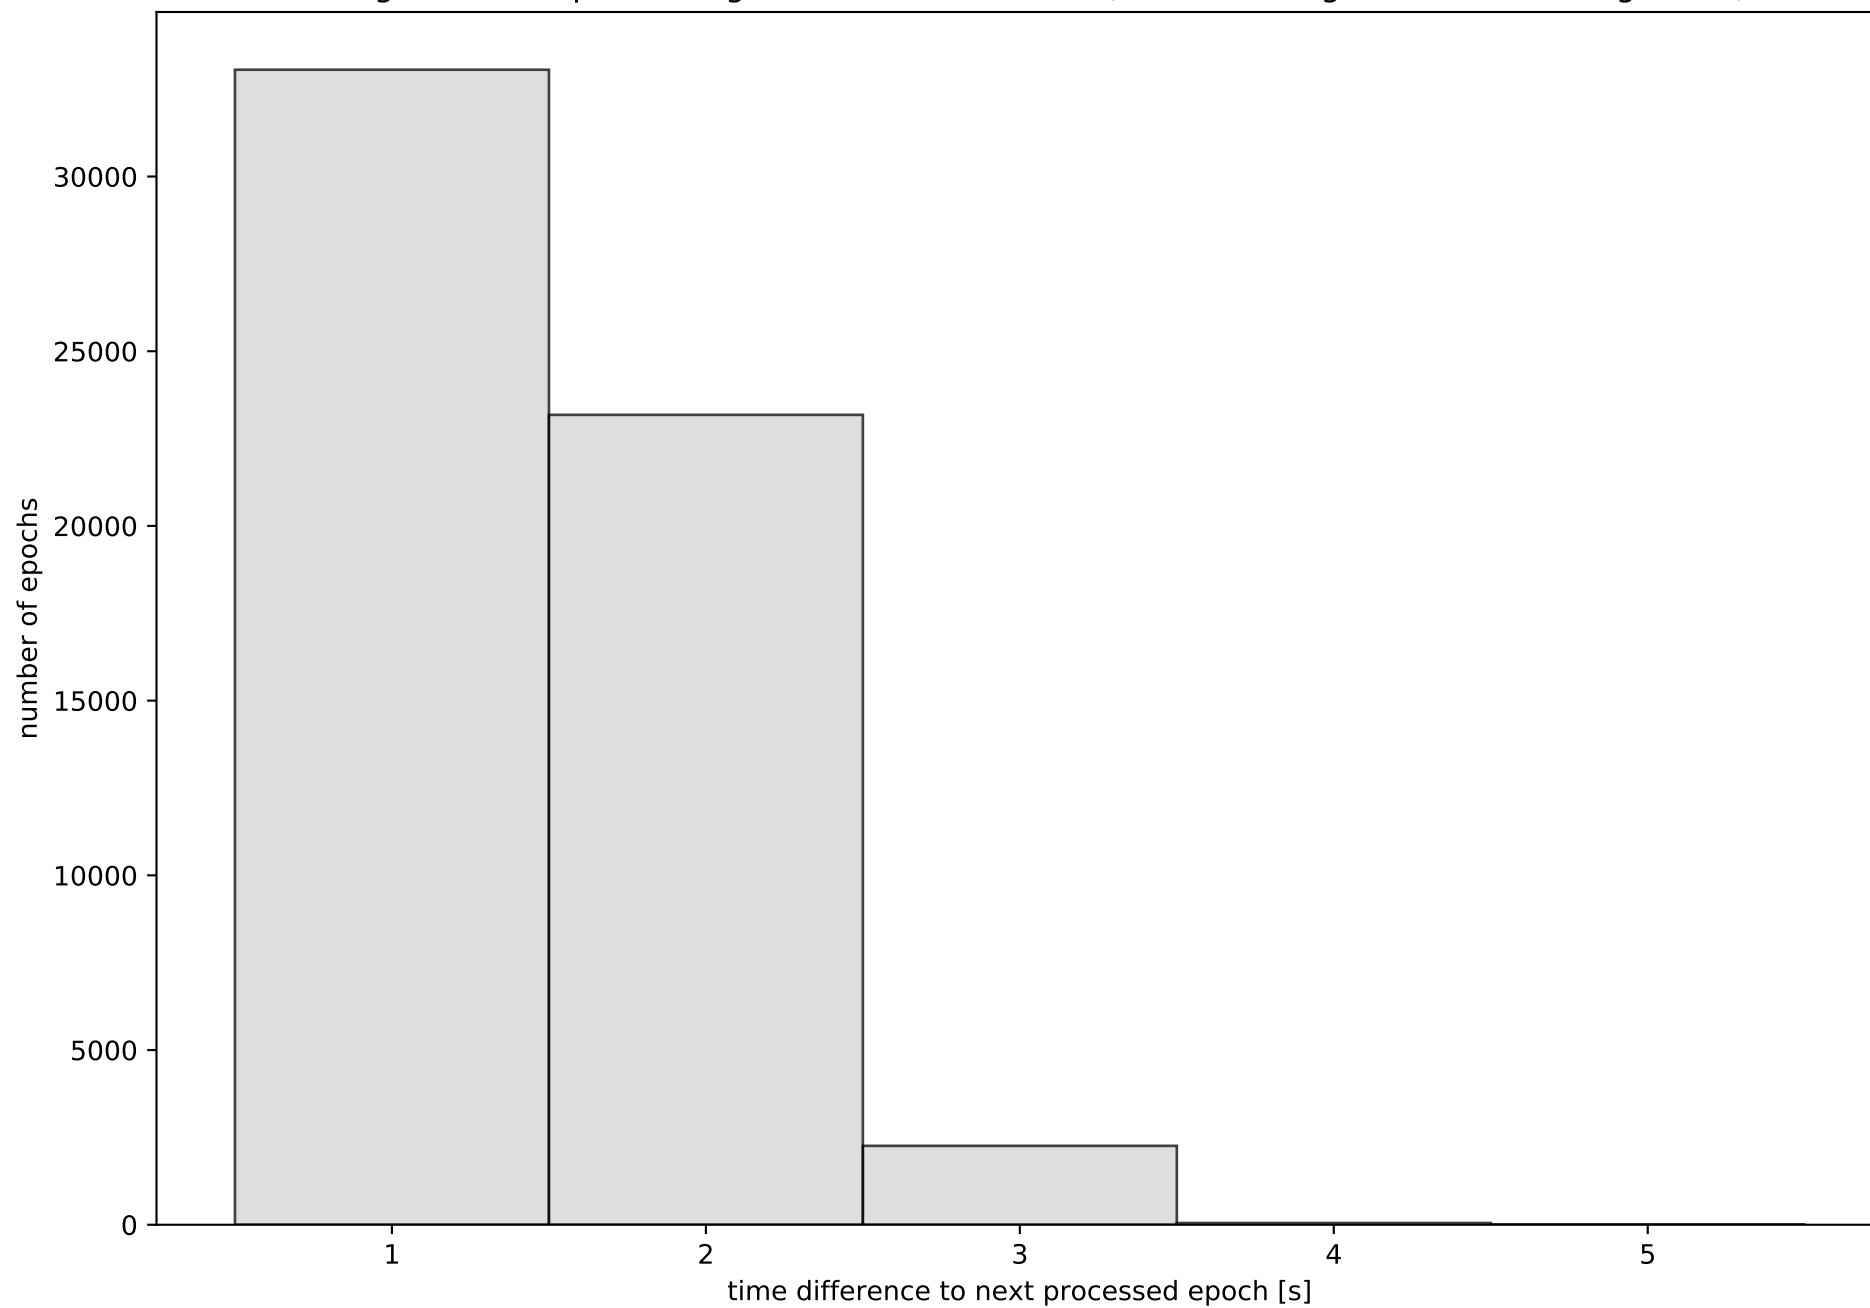


Network N32T with threshold set to 0.3

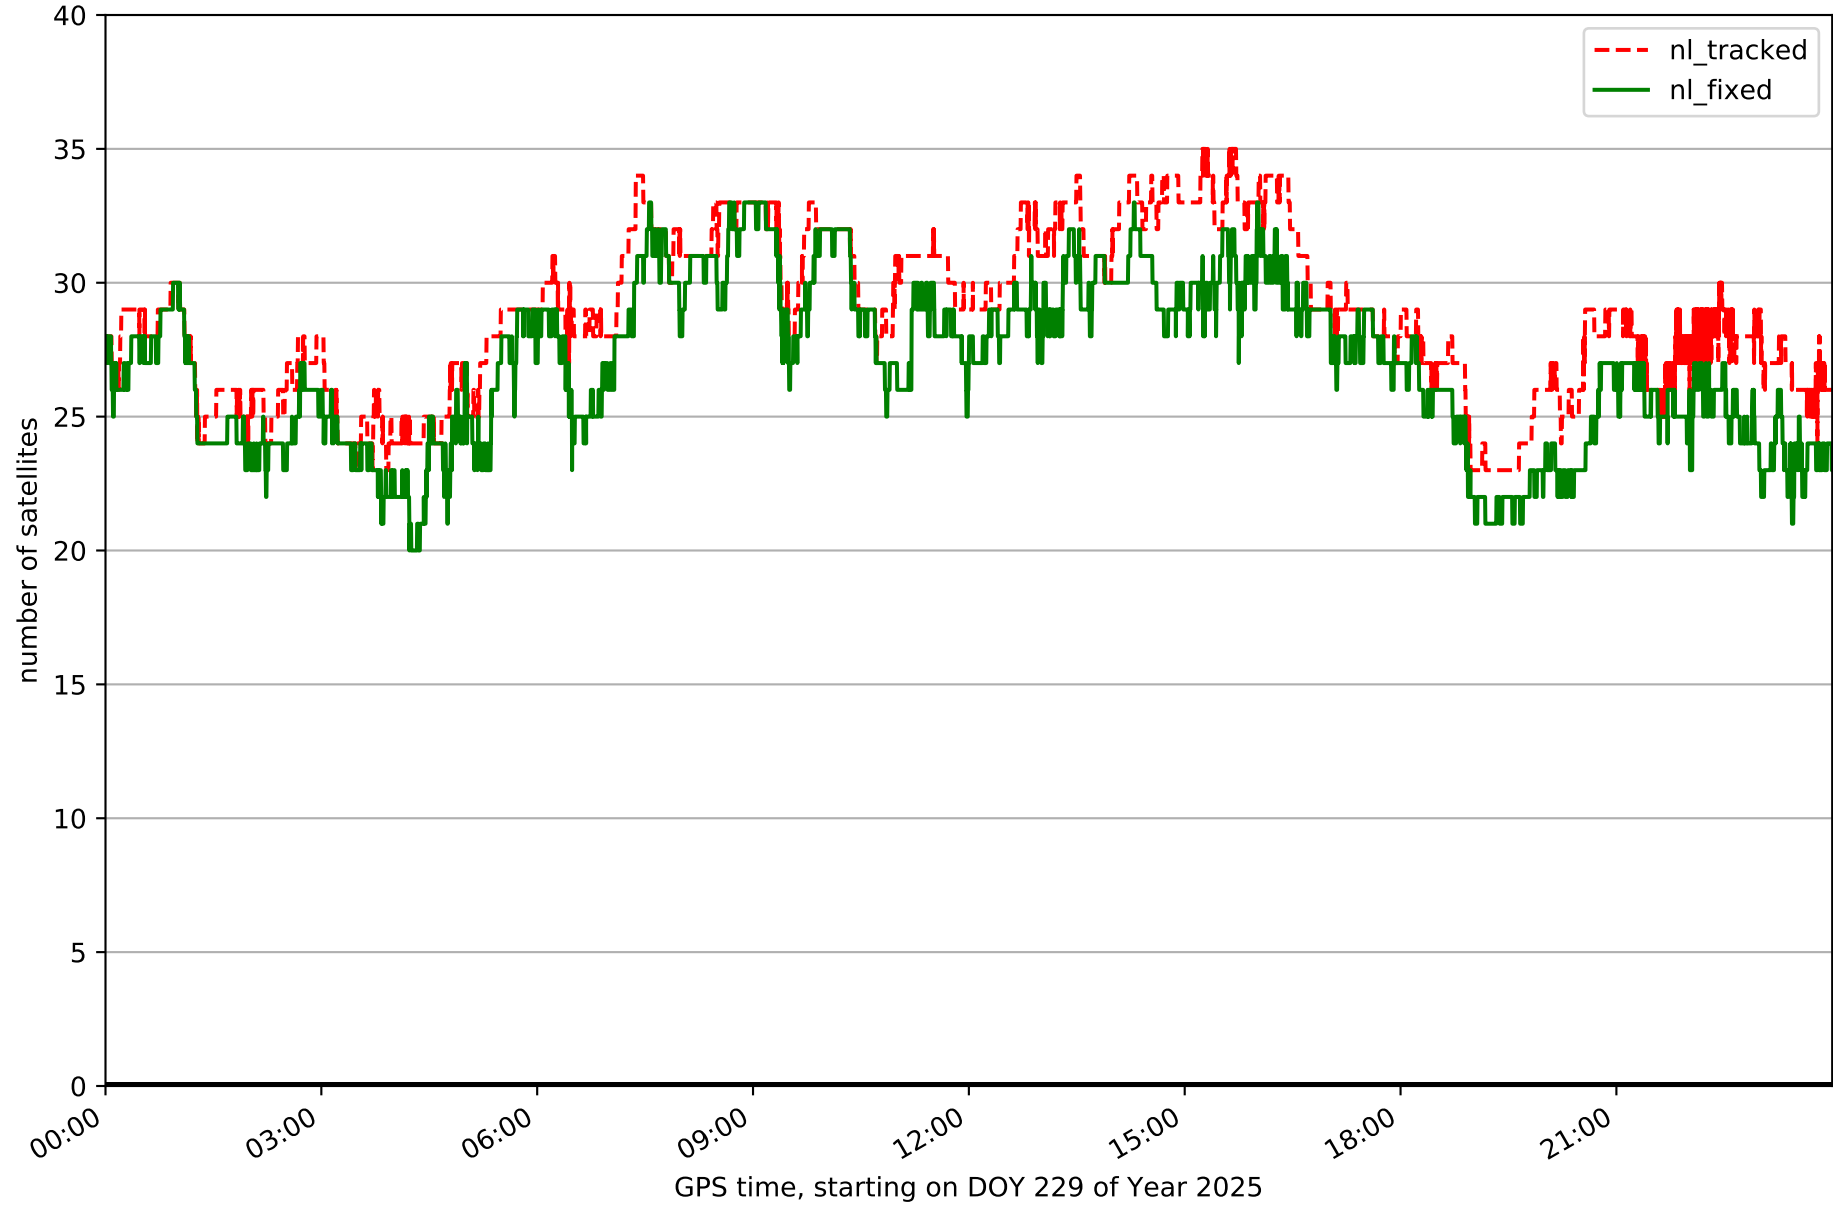


Fixing percentage of satellites in network N32T with threshold set to 0.3

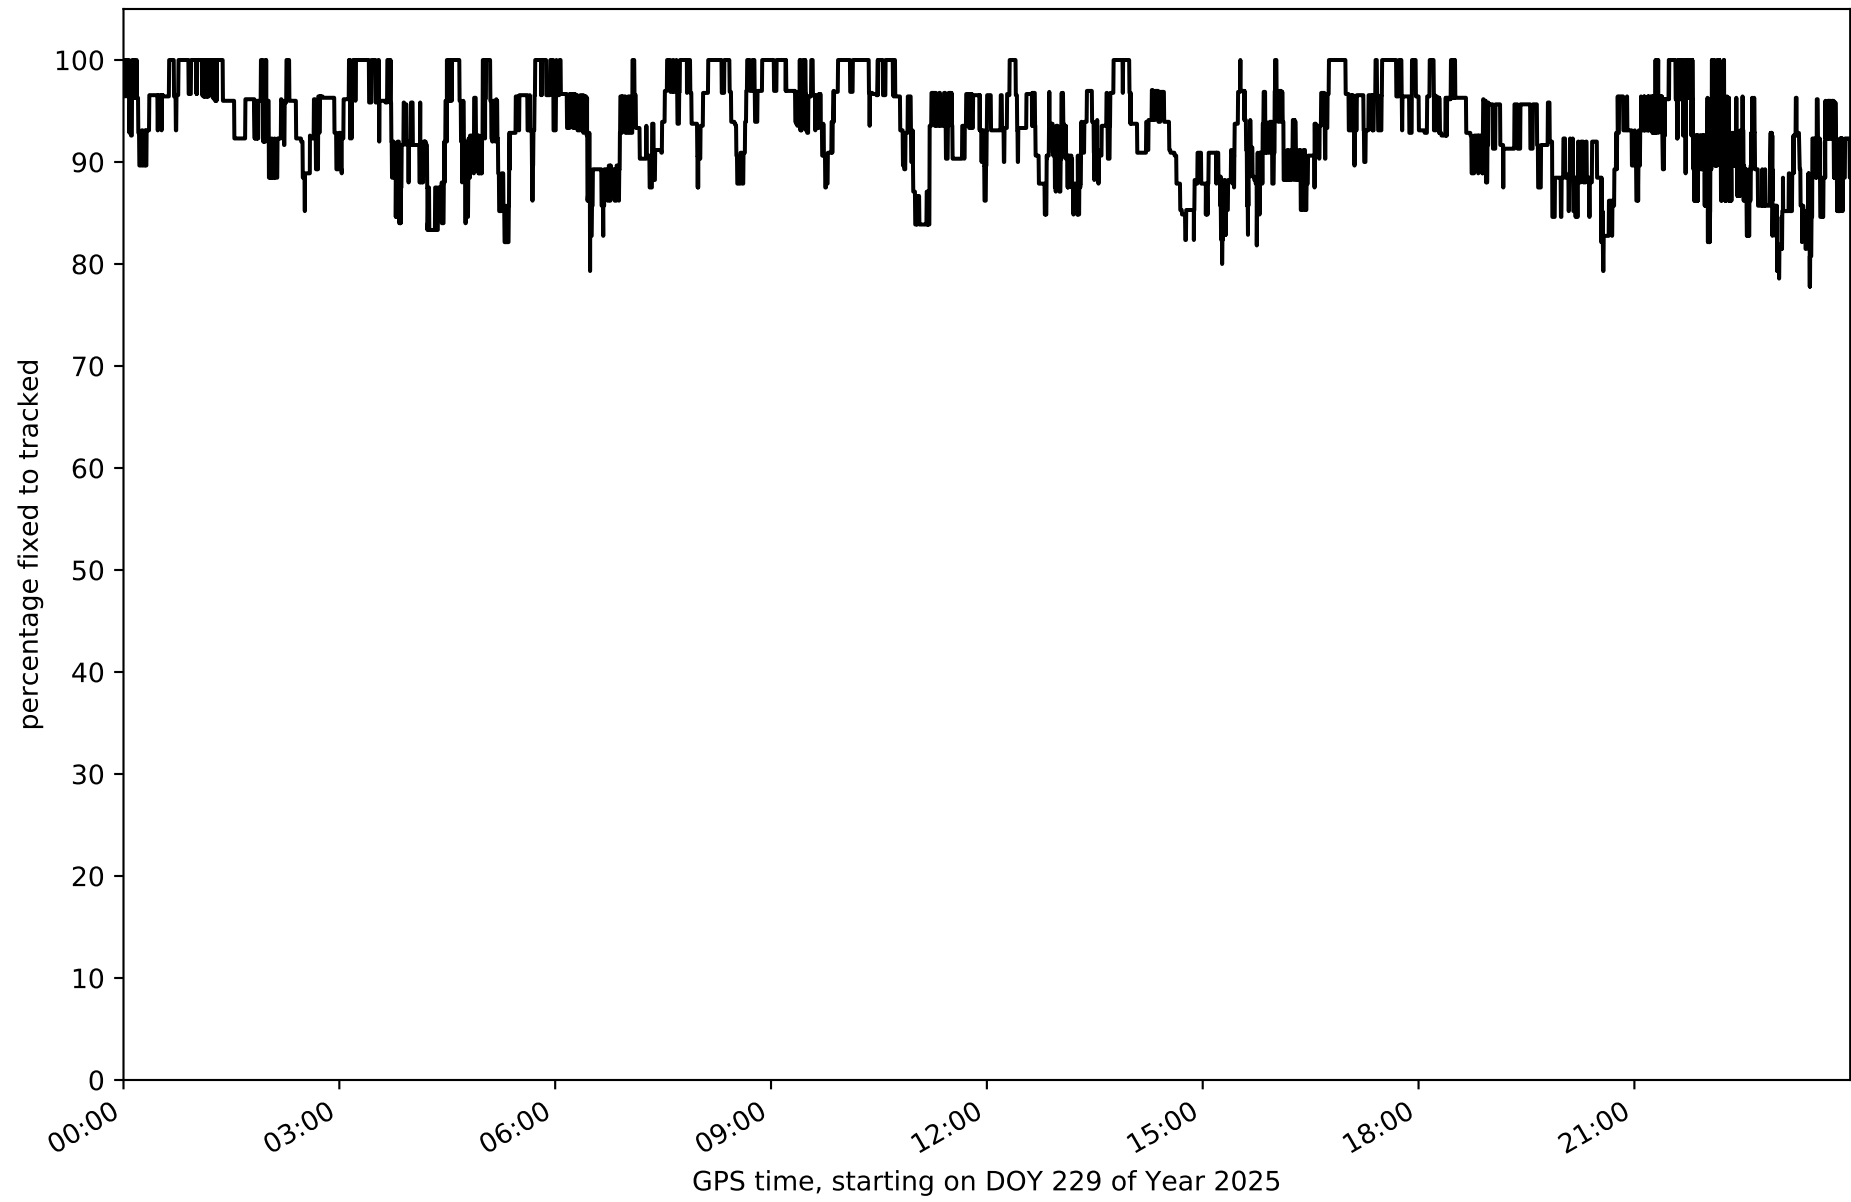


Network N32T - only GPS with threshold set to 0.3

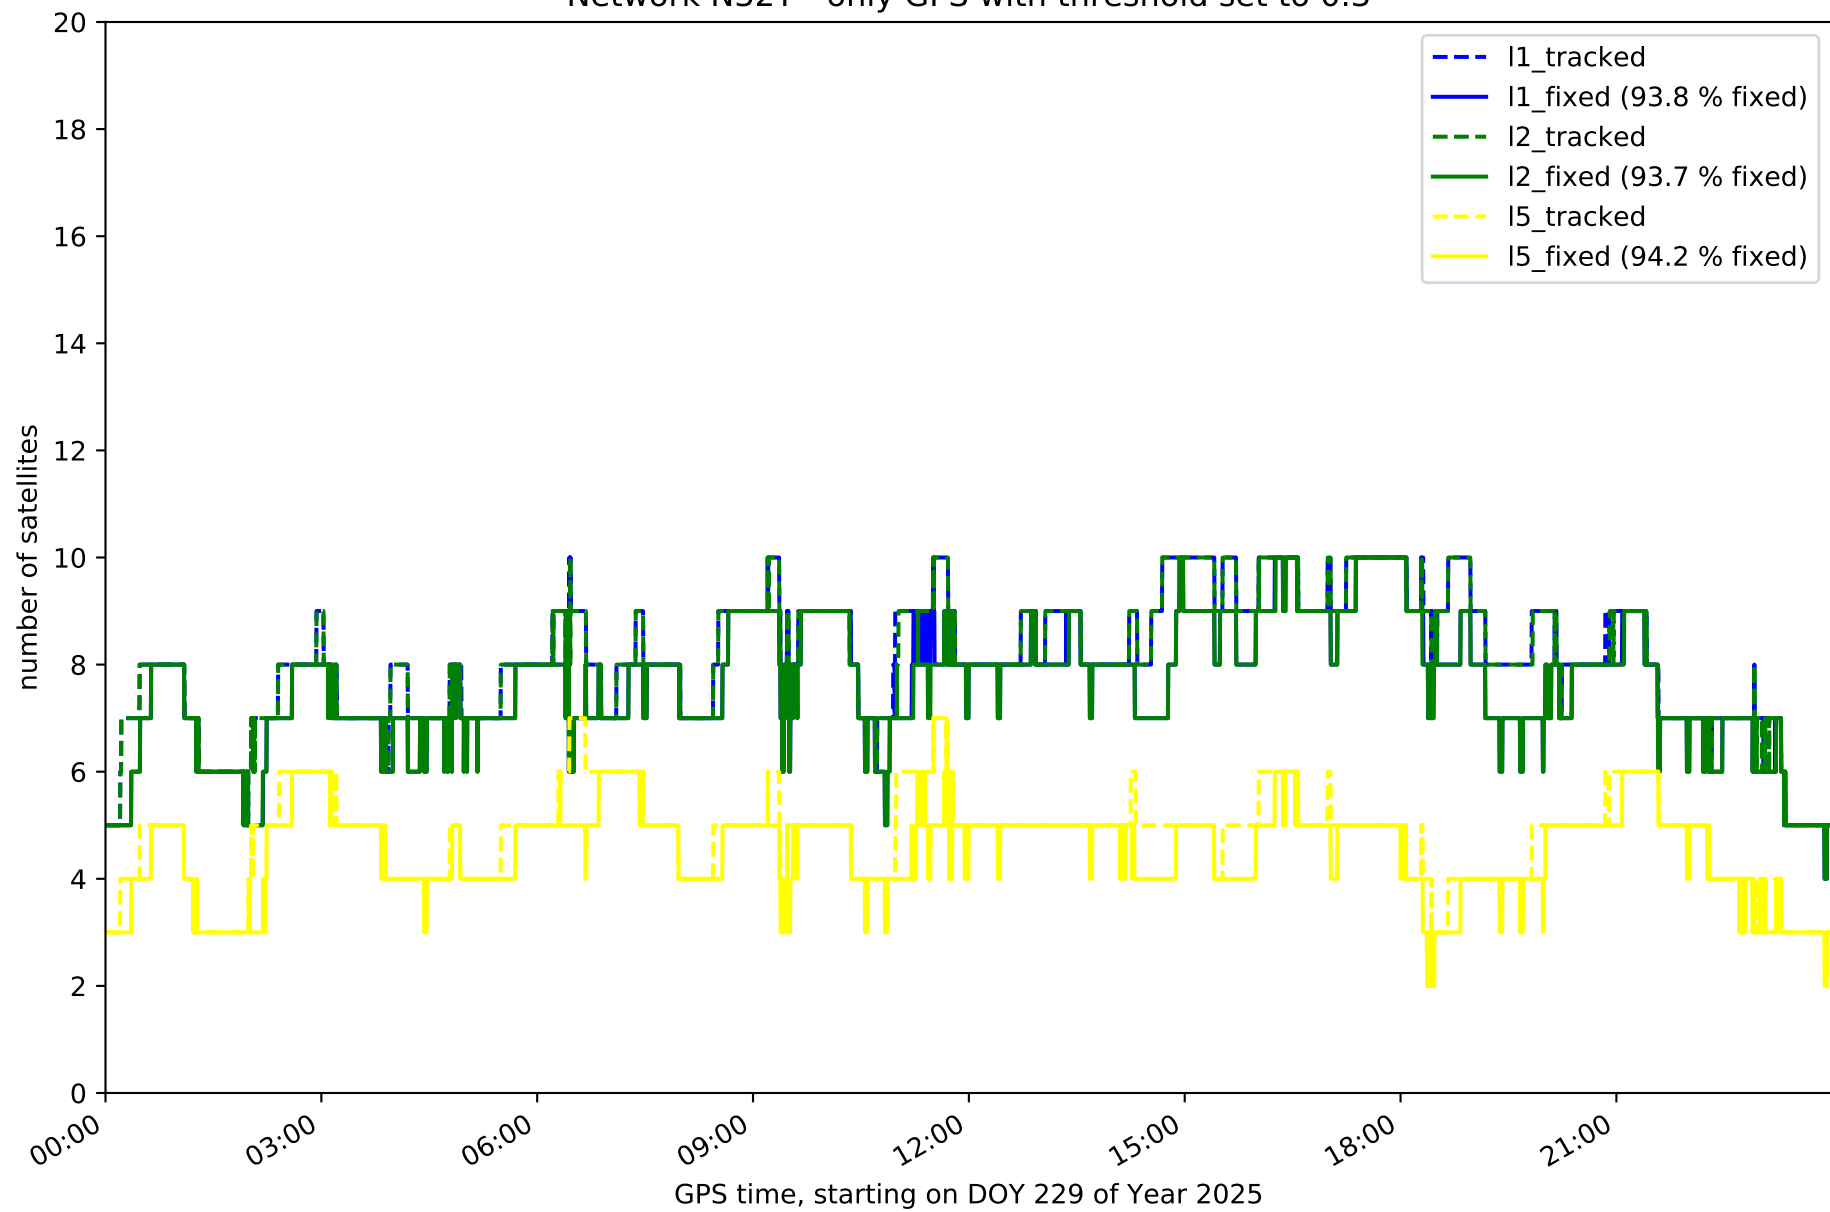


Network N32T - only GLONASS with threshold set to 0.3

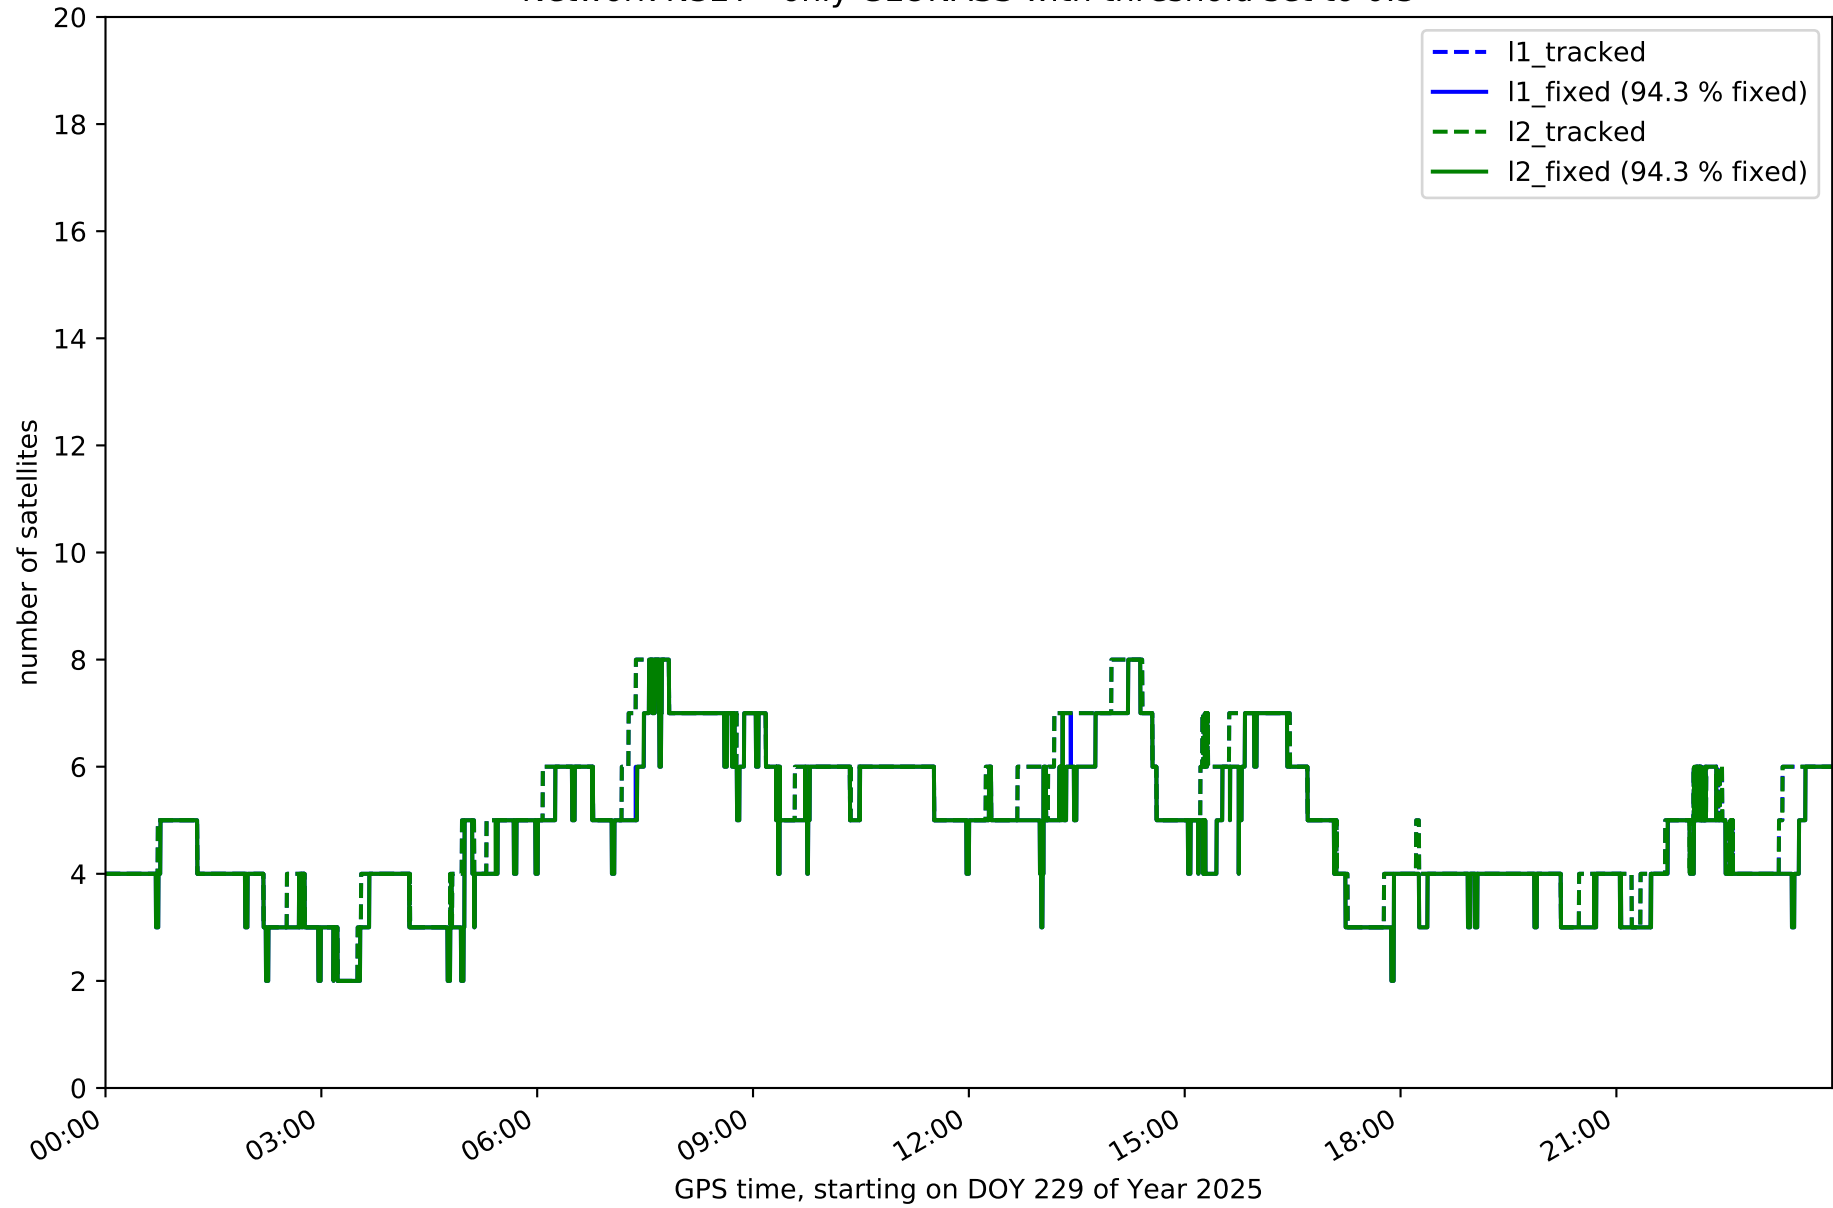


Network N32T - only BDS with threshold set to 0.3

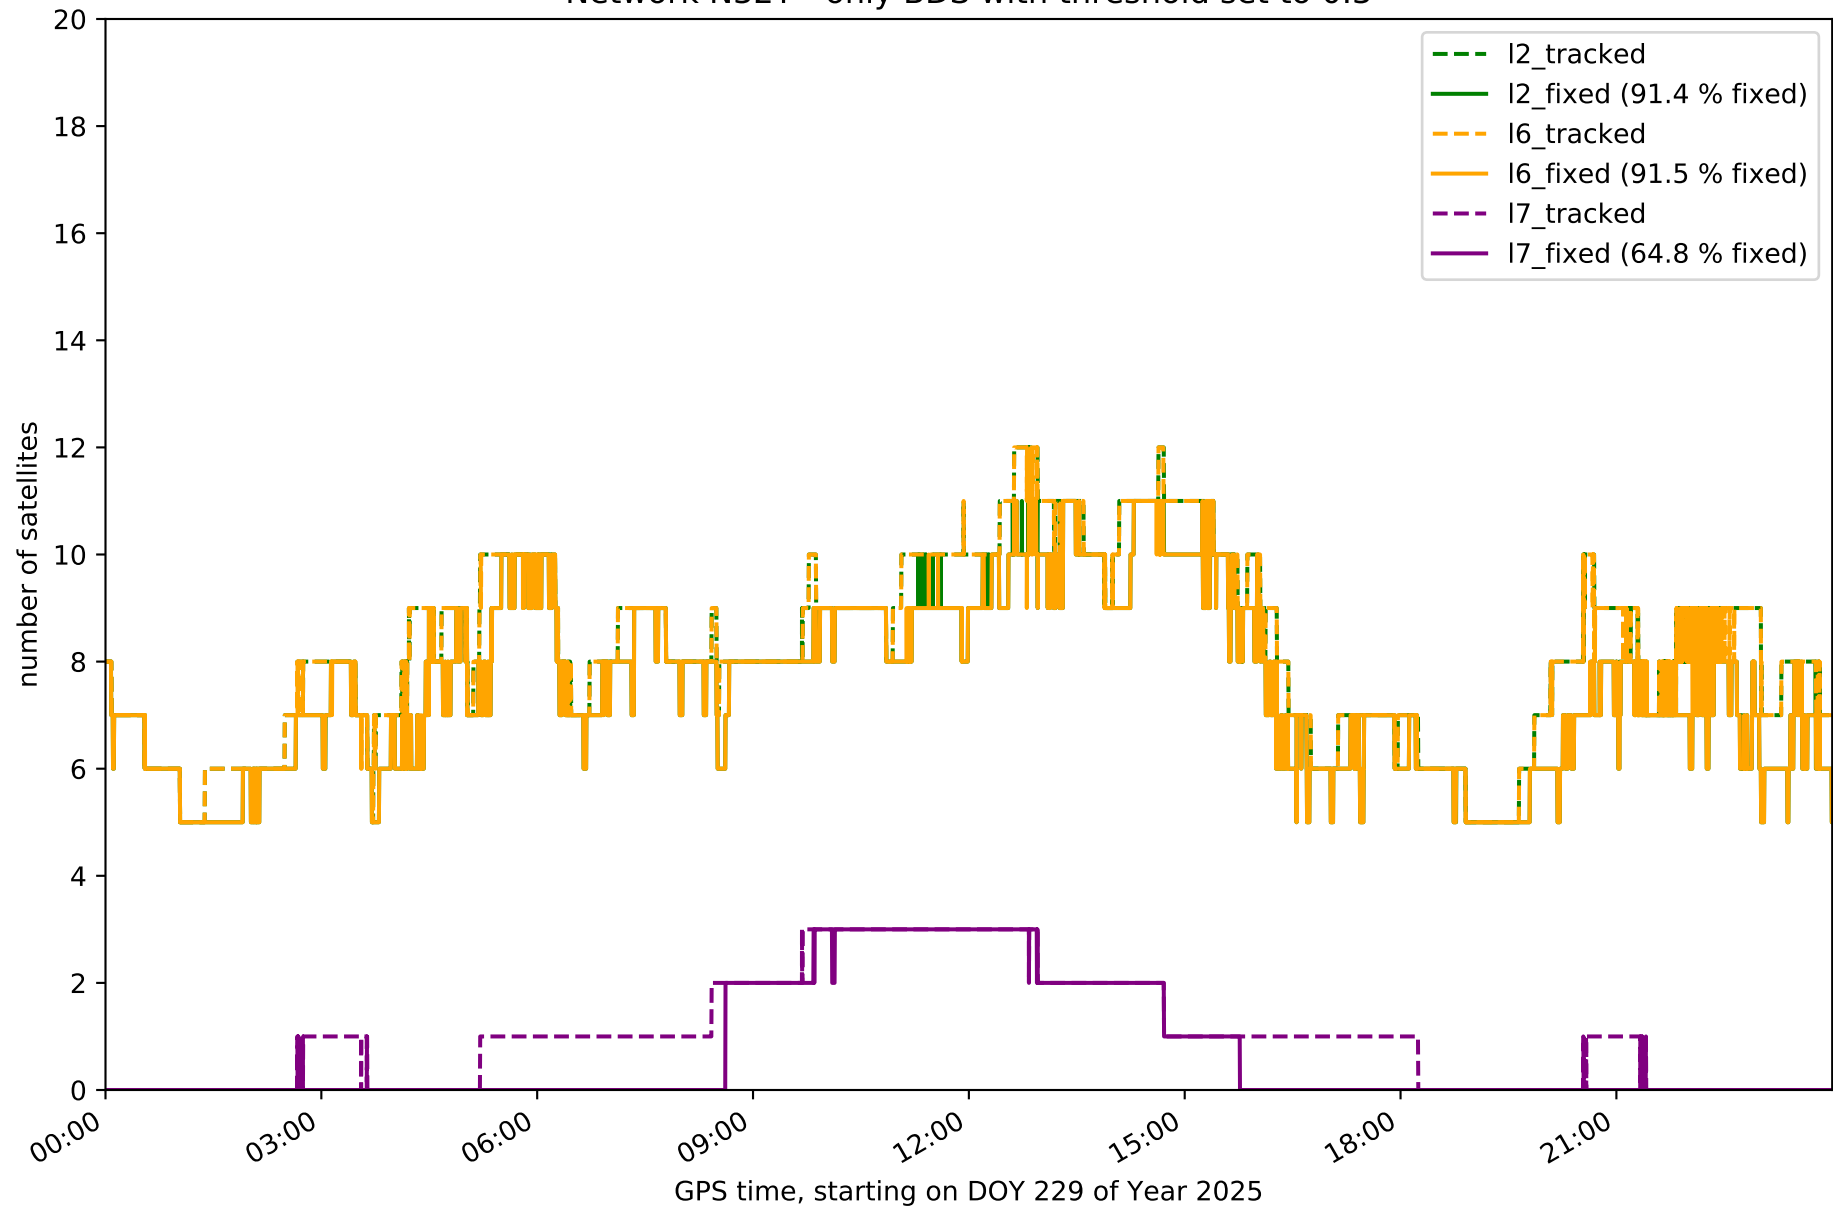


Network N32T - only Galileo with threshold set to 0.3

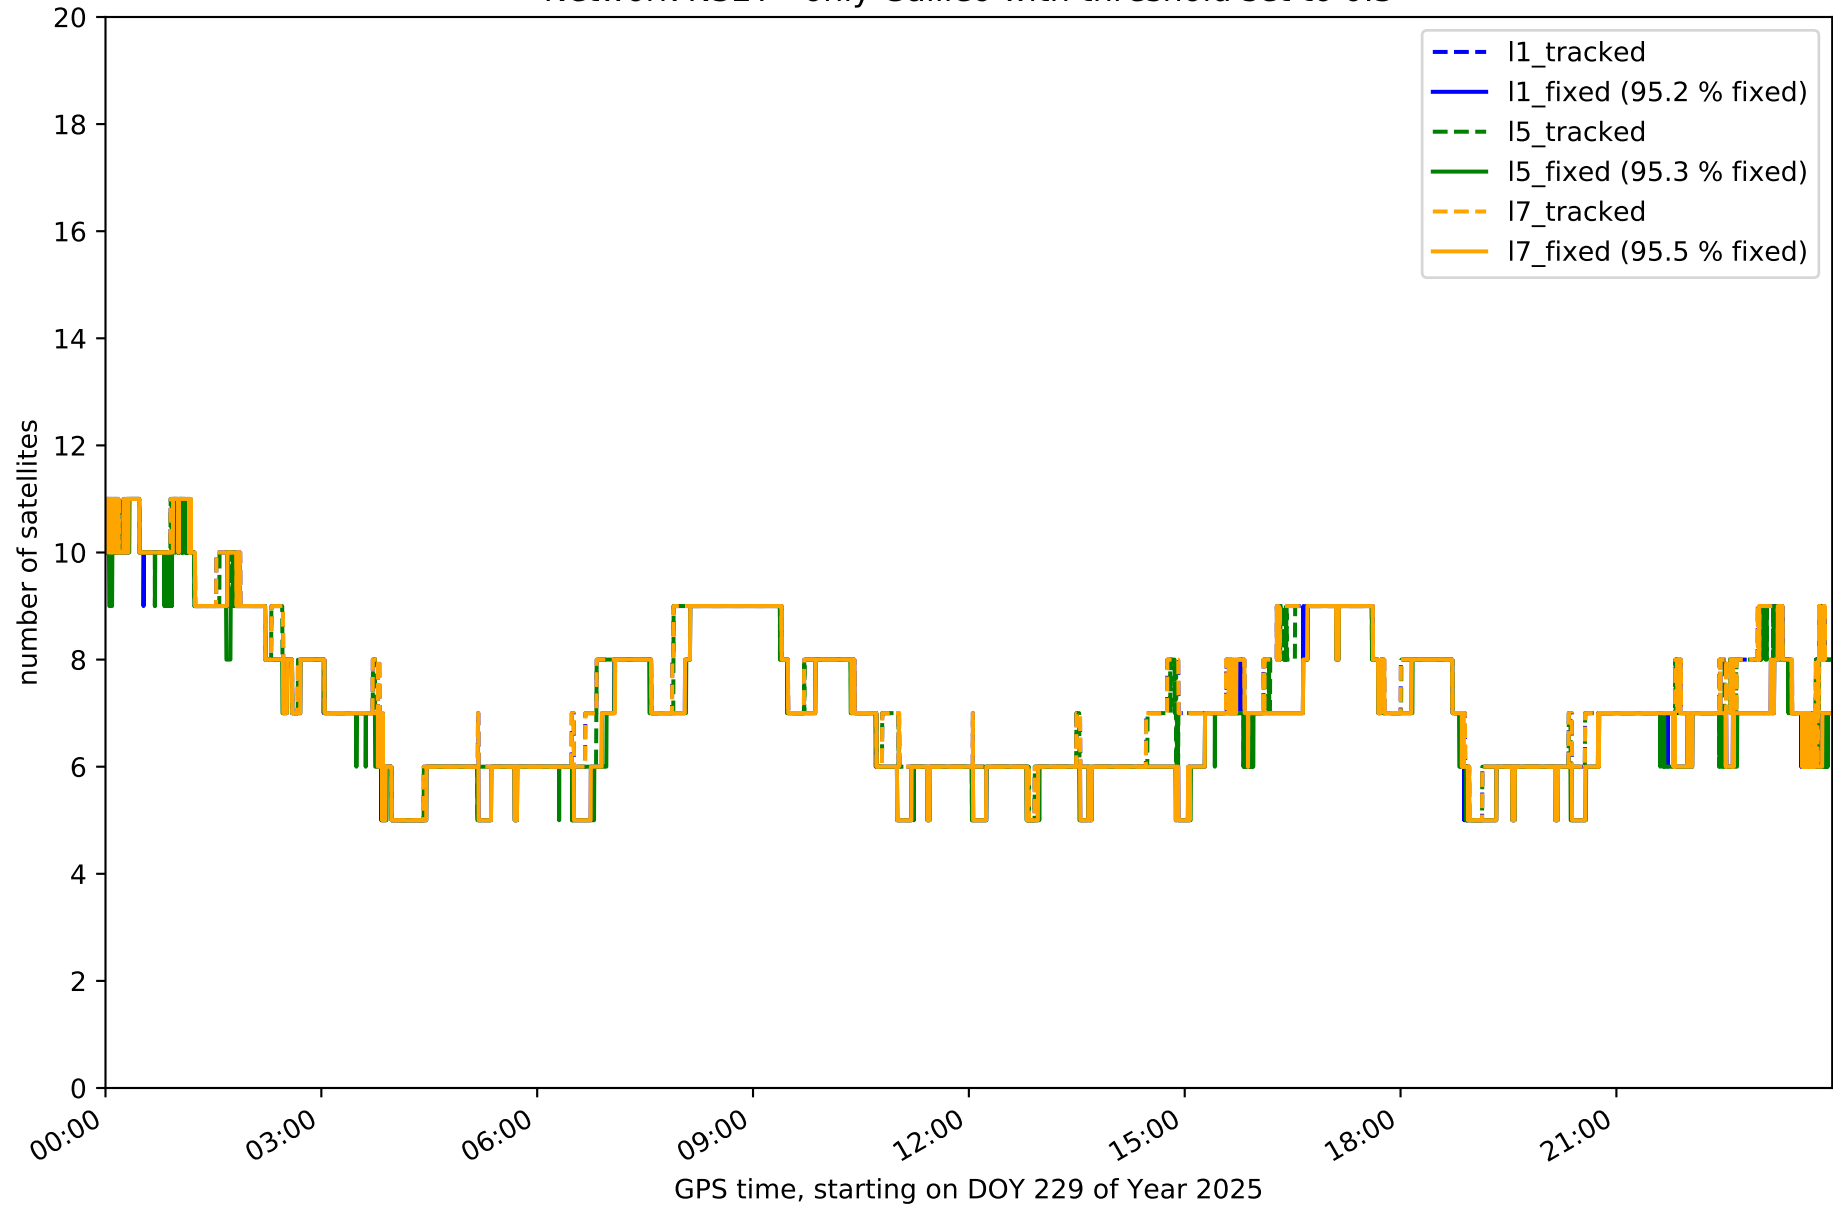


Station EH01 in network N32T

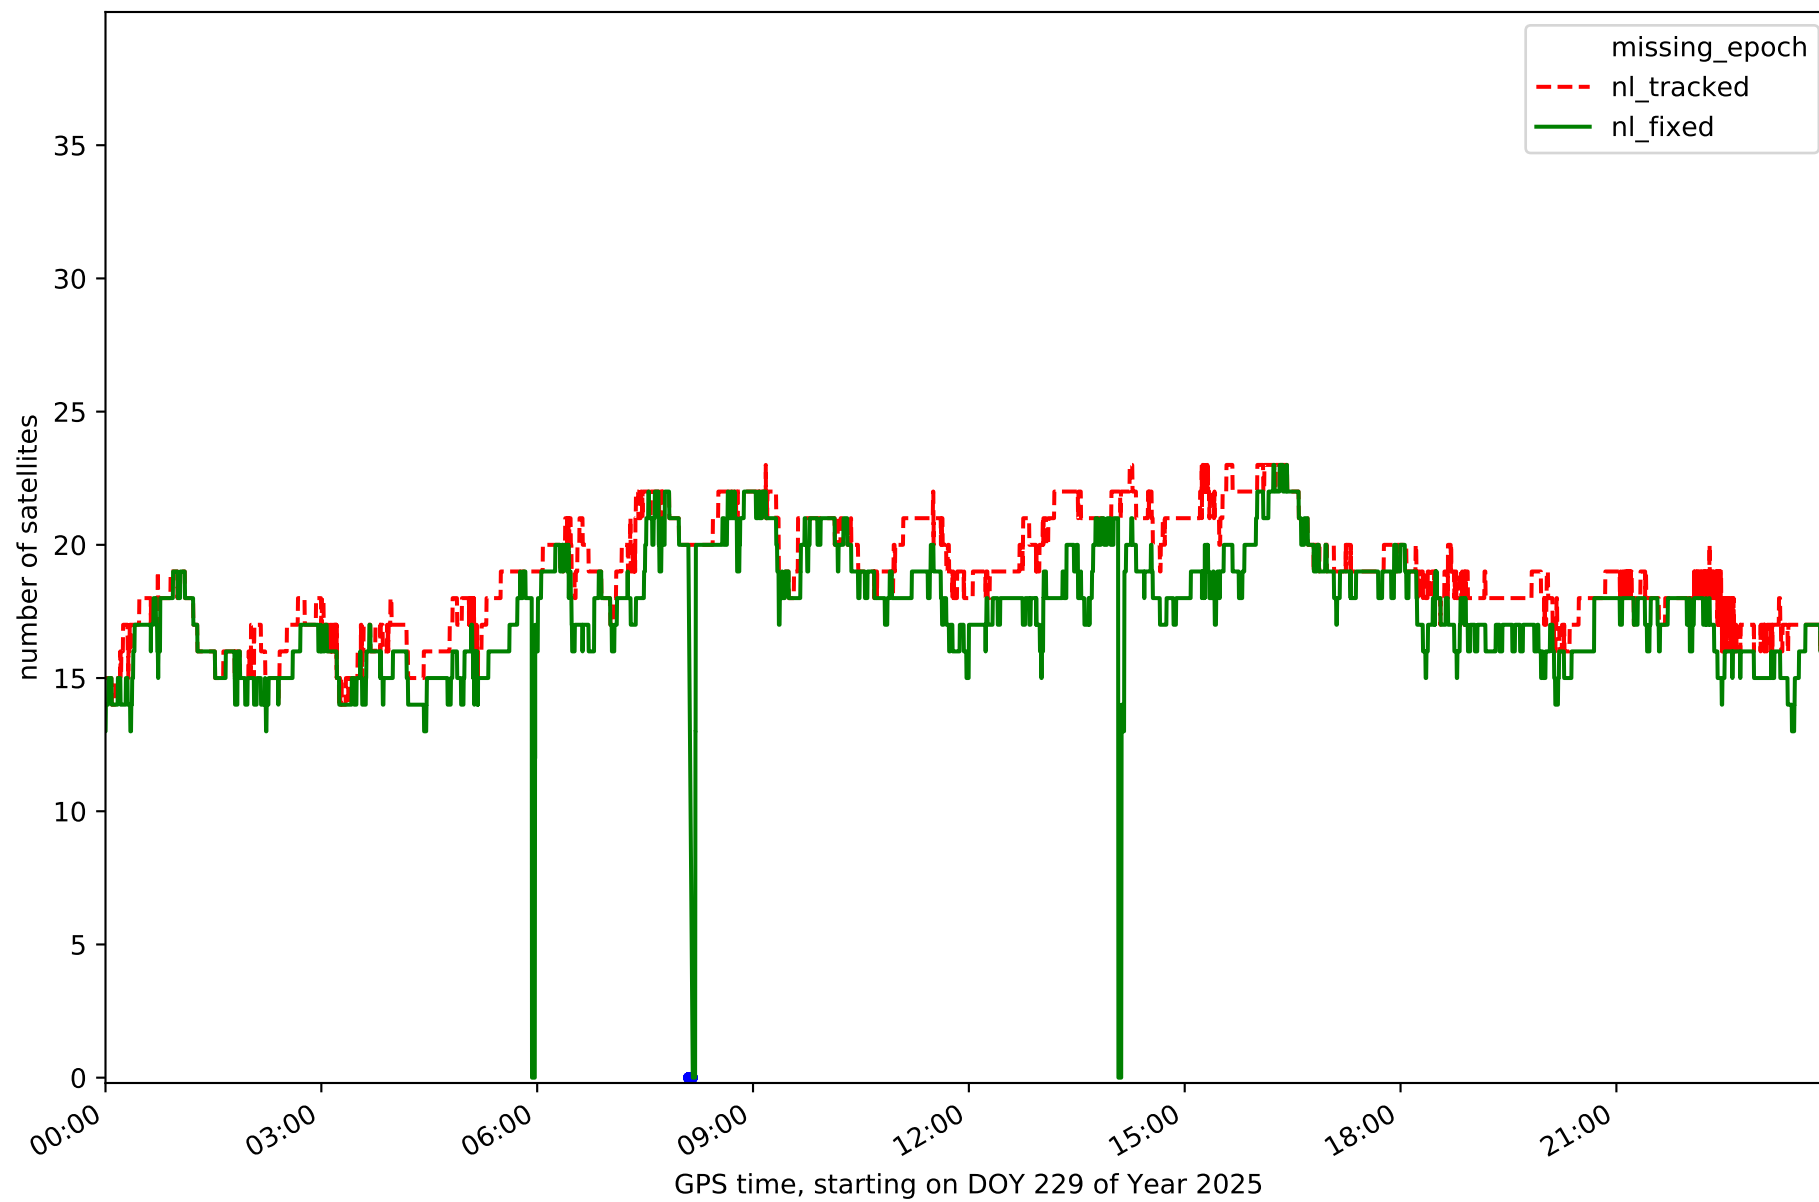


Station EH02 in network N32T

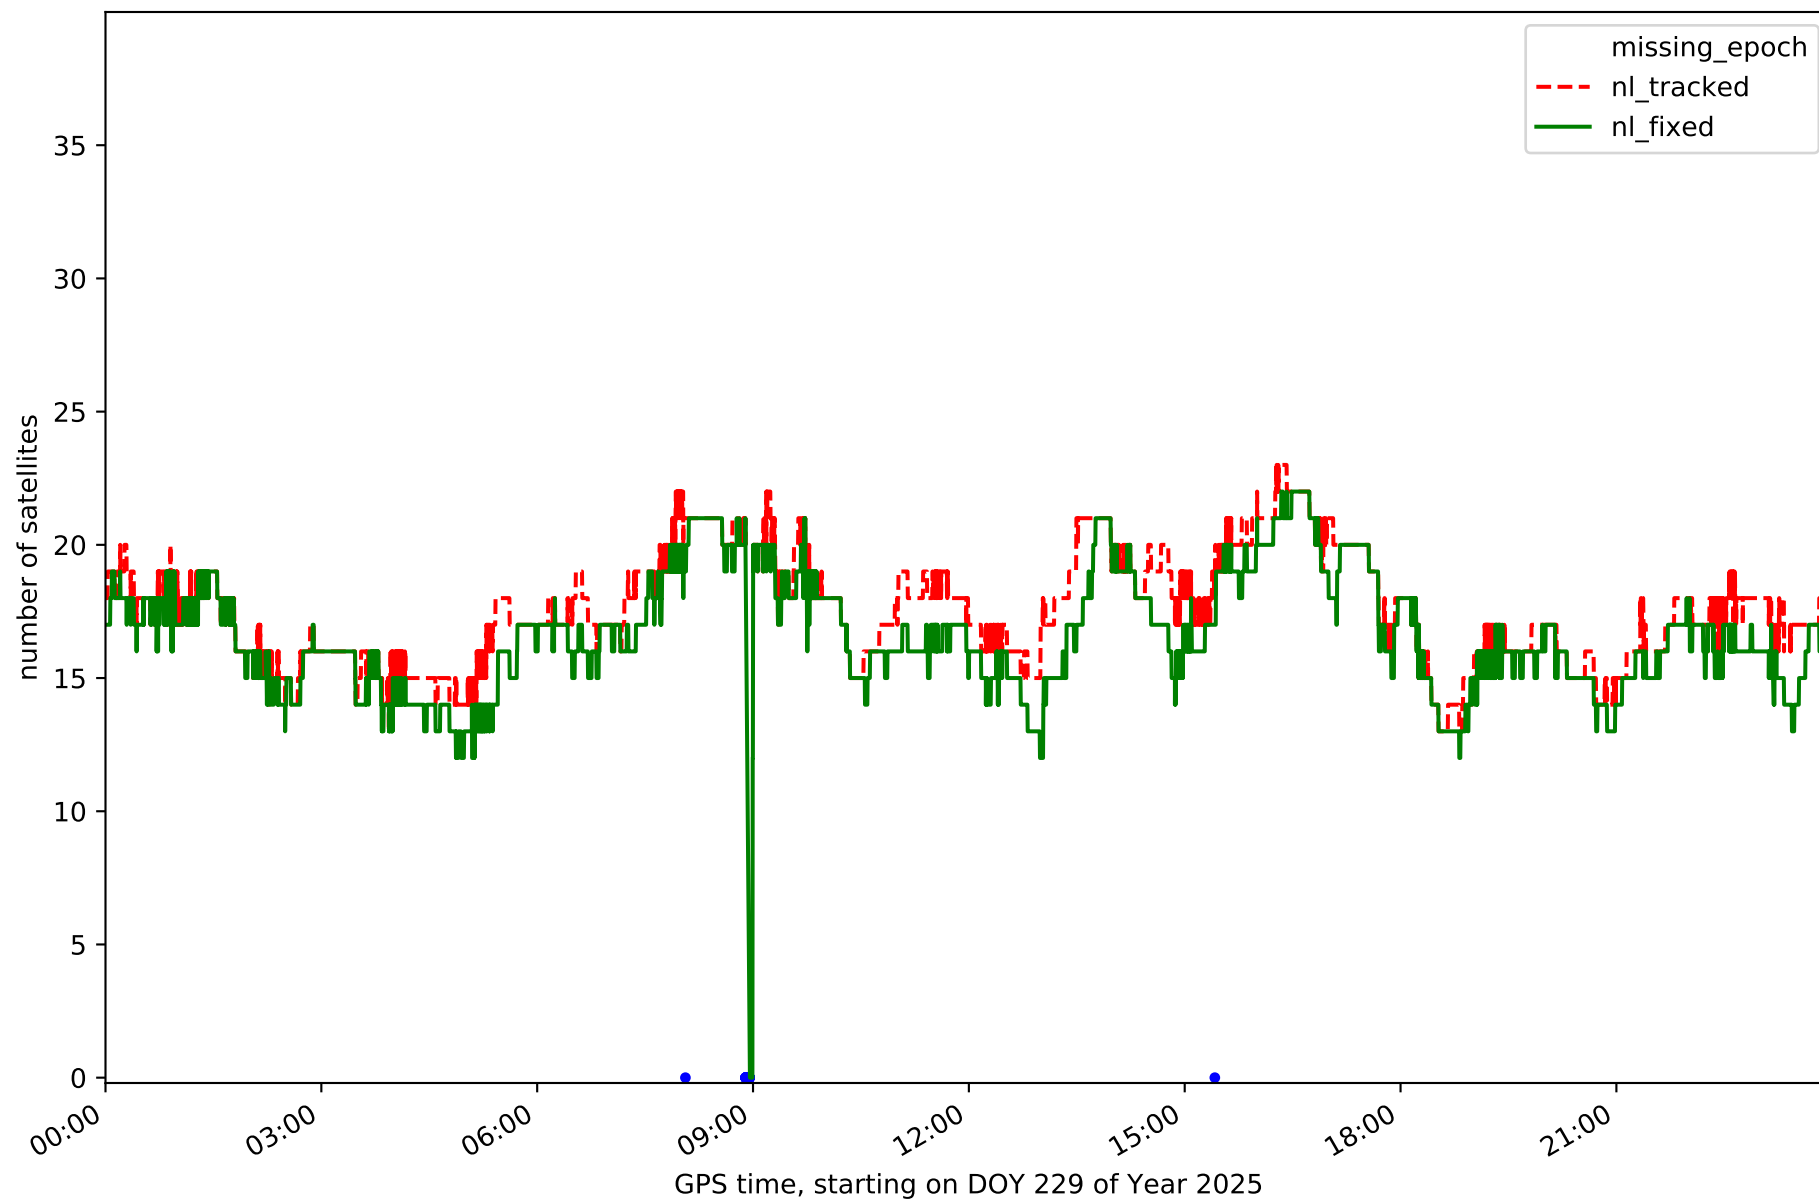


Station GOM1 in network N32T

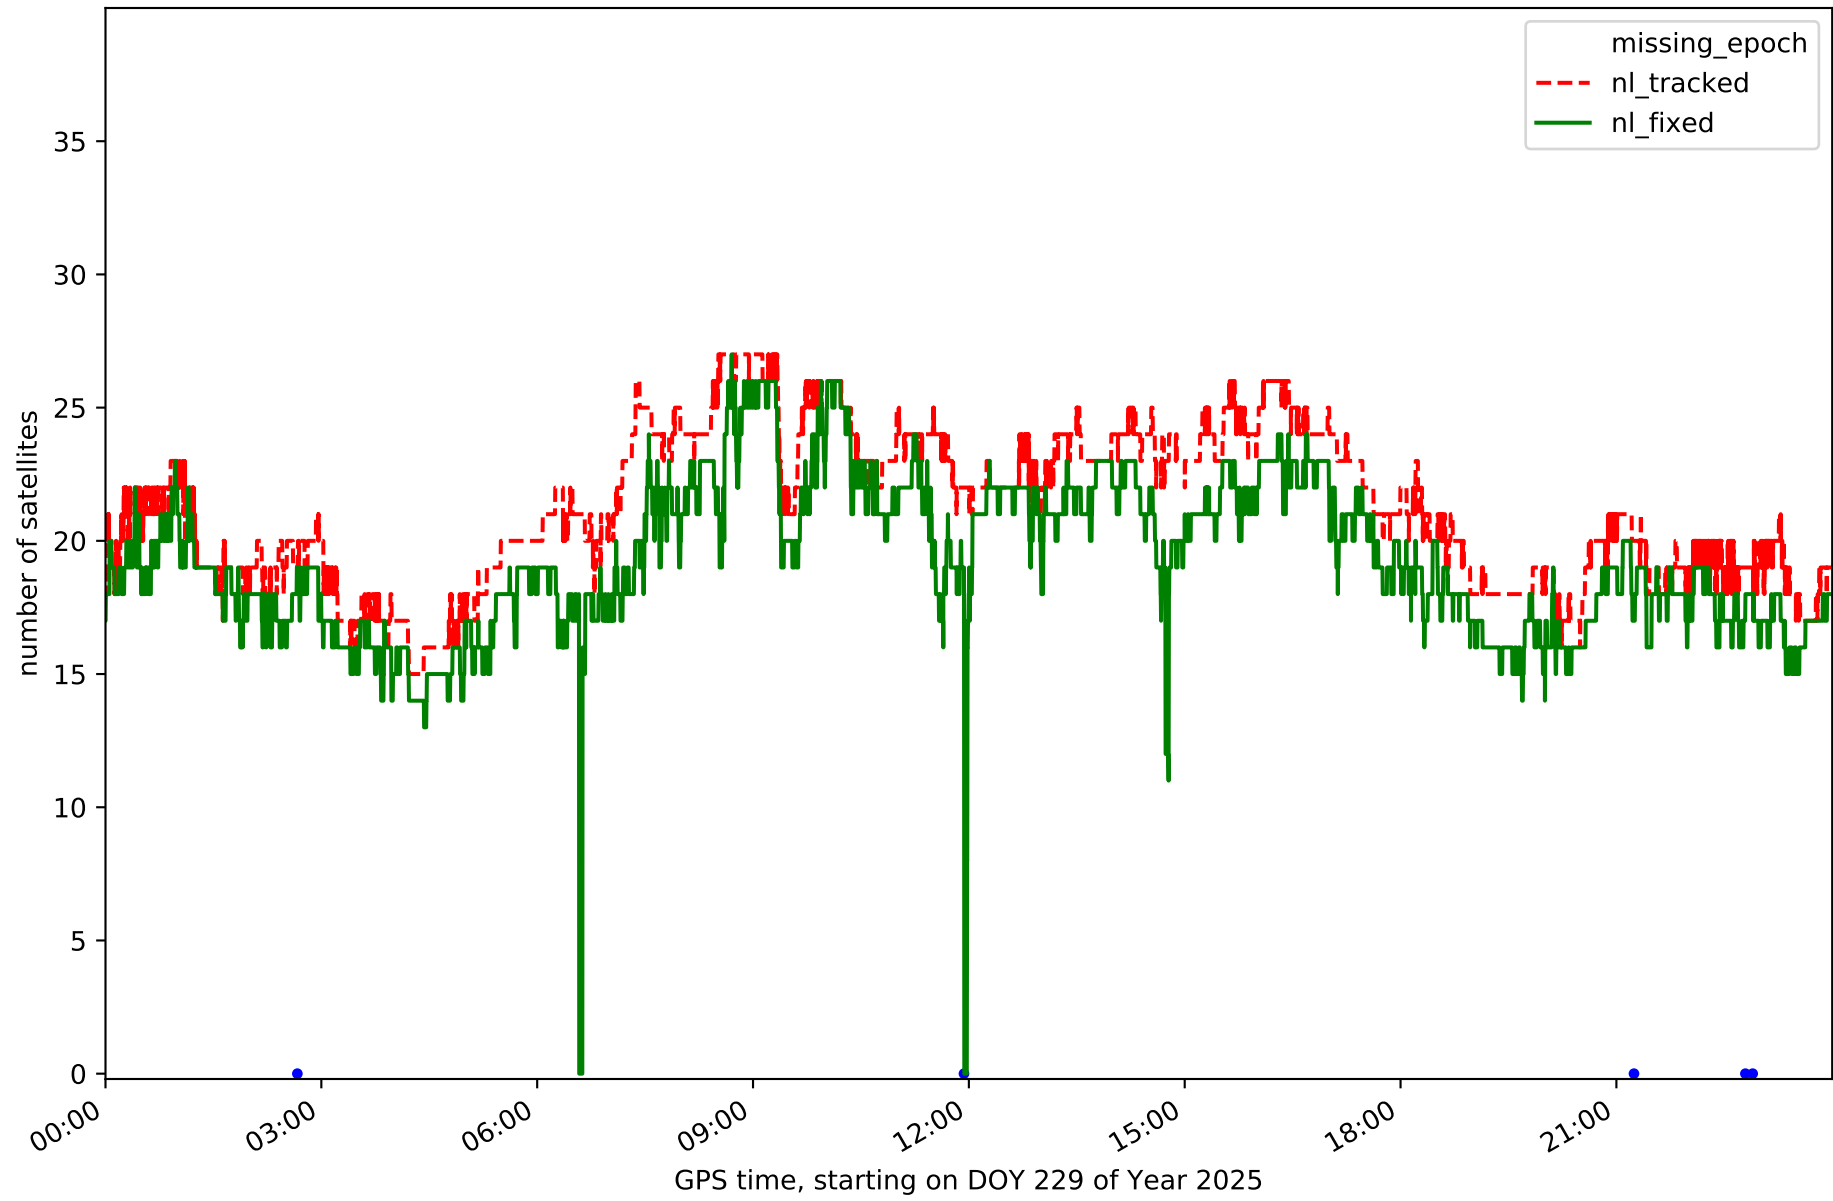


Station IZAN in network N32T

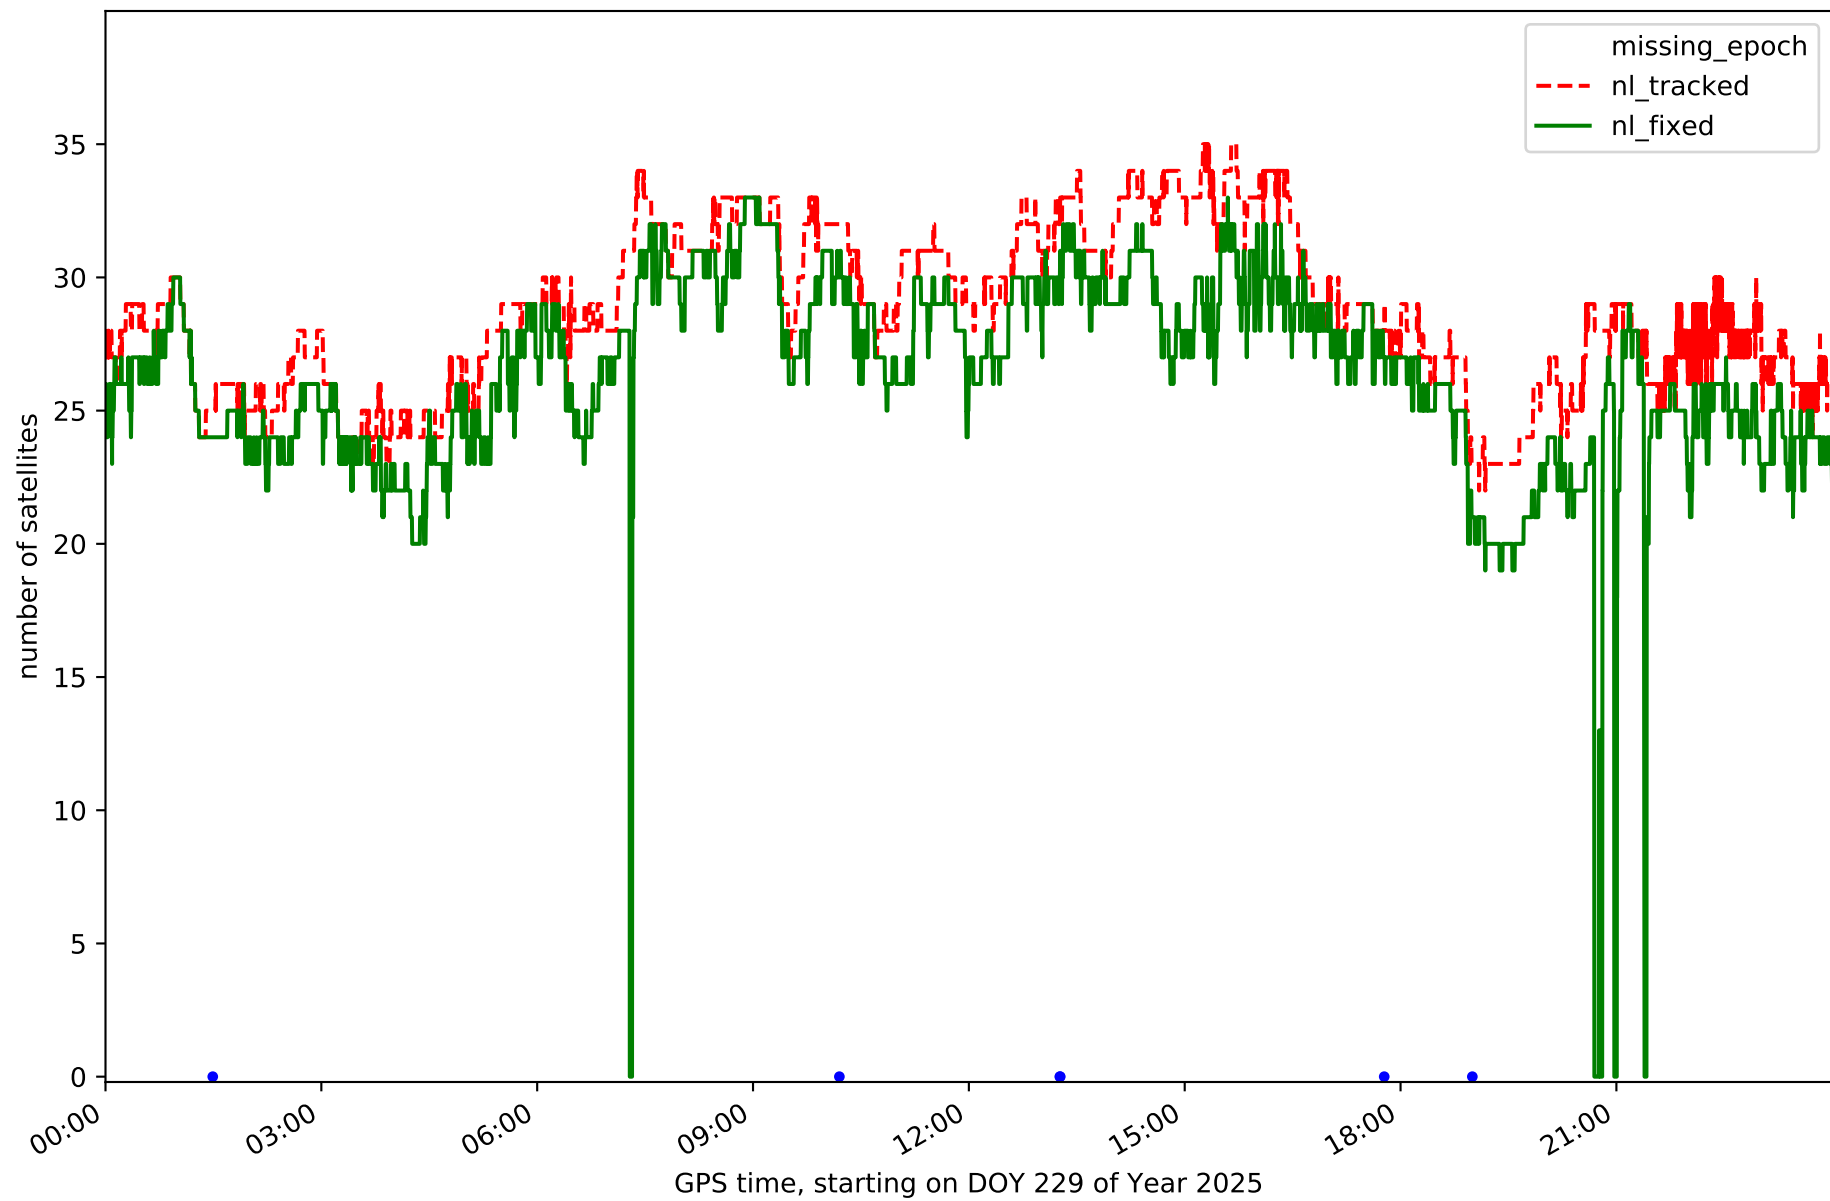


Station LP01 in network N32T

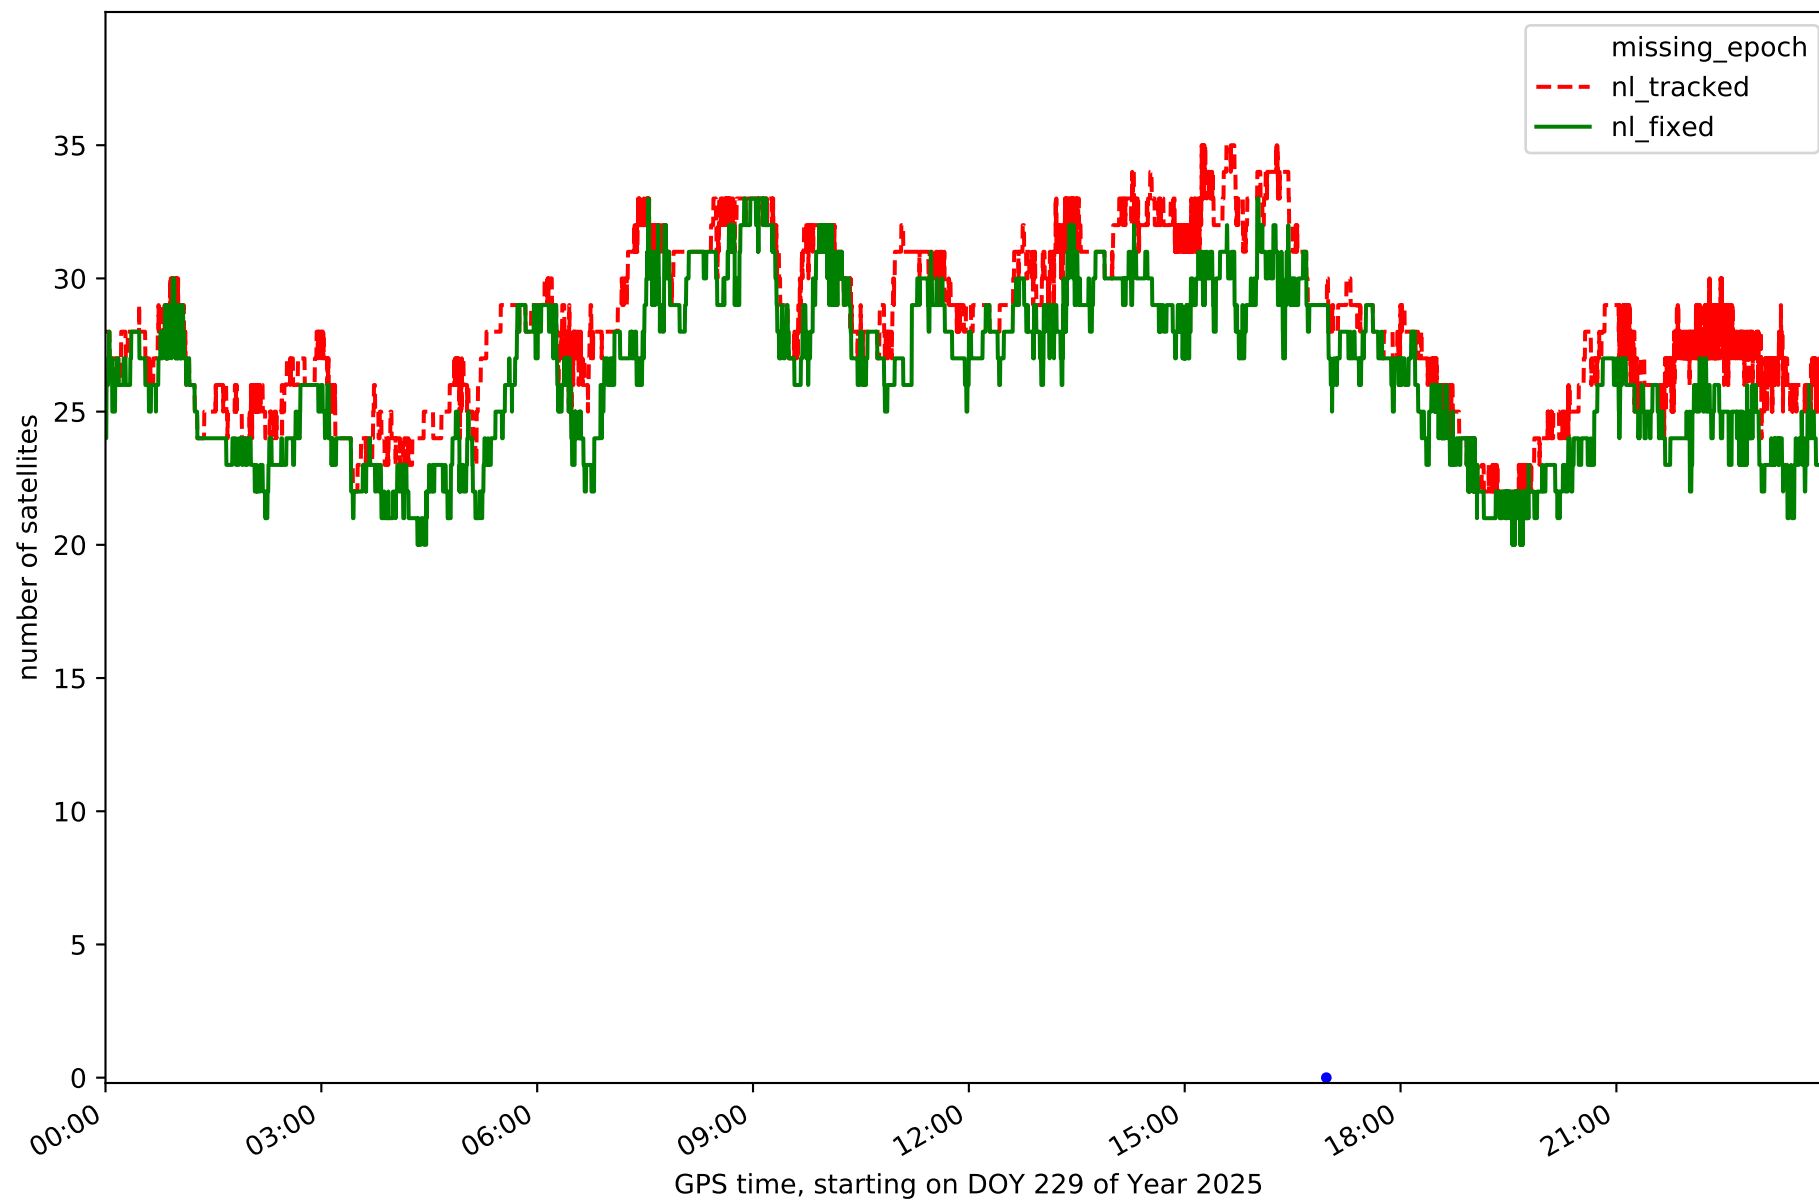


Station LP03 in network N32T

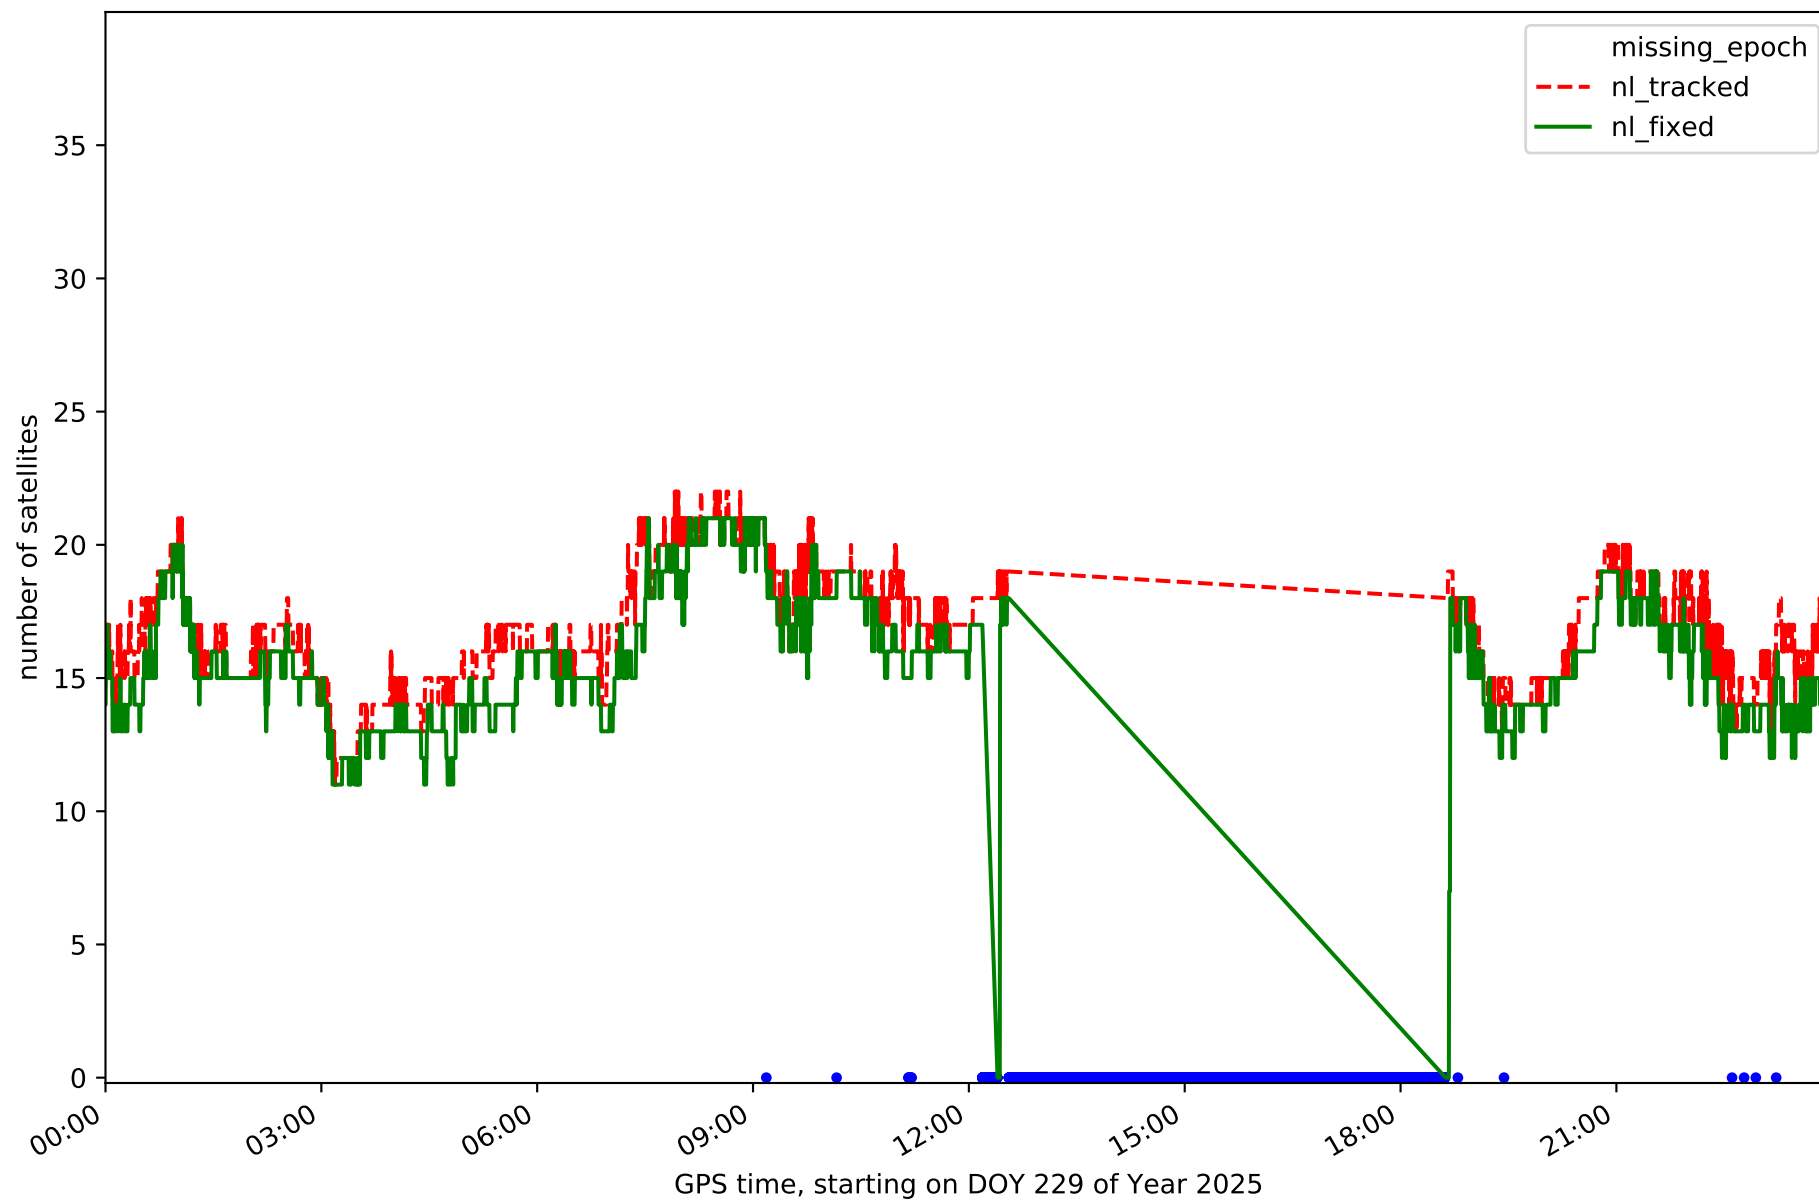


Station LPAL in network N32T

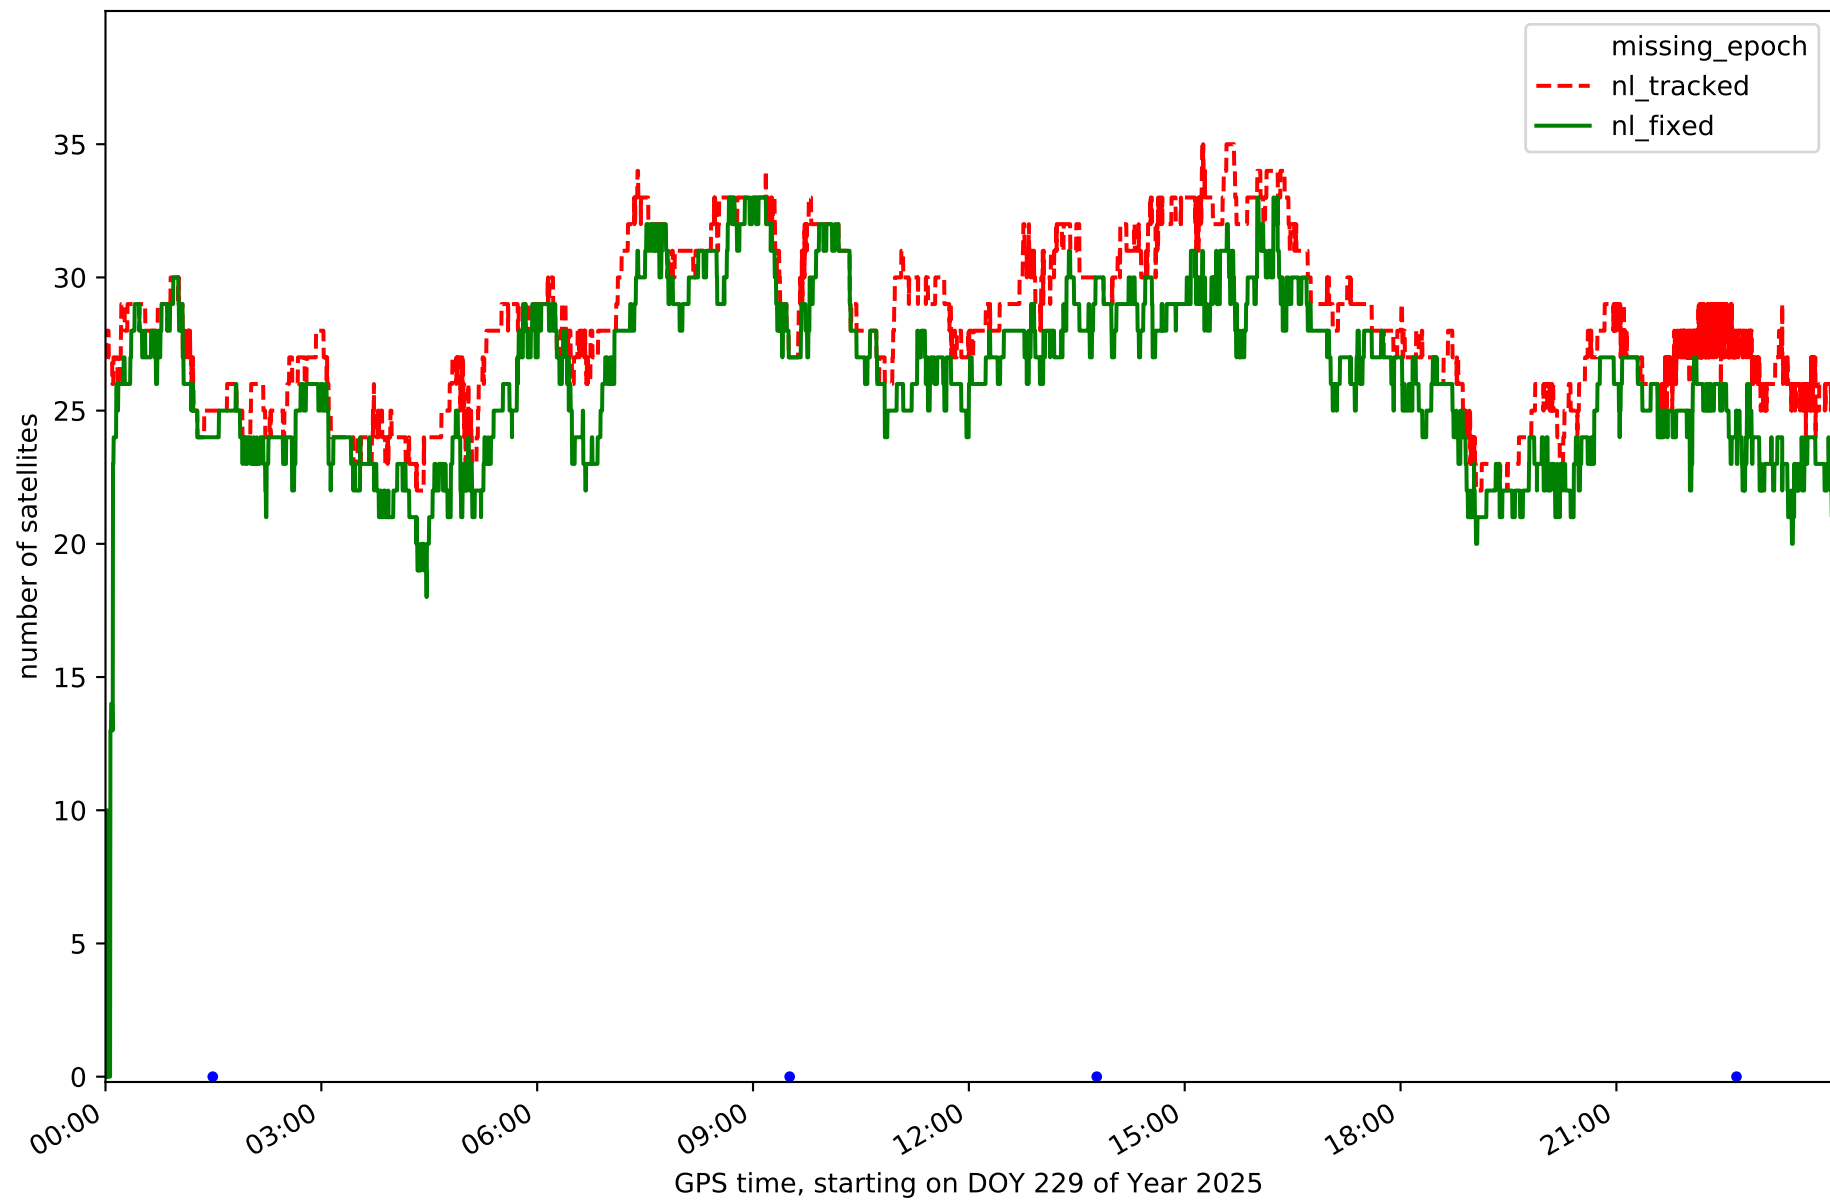


Station LRES in network N32T

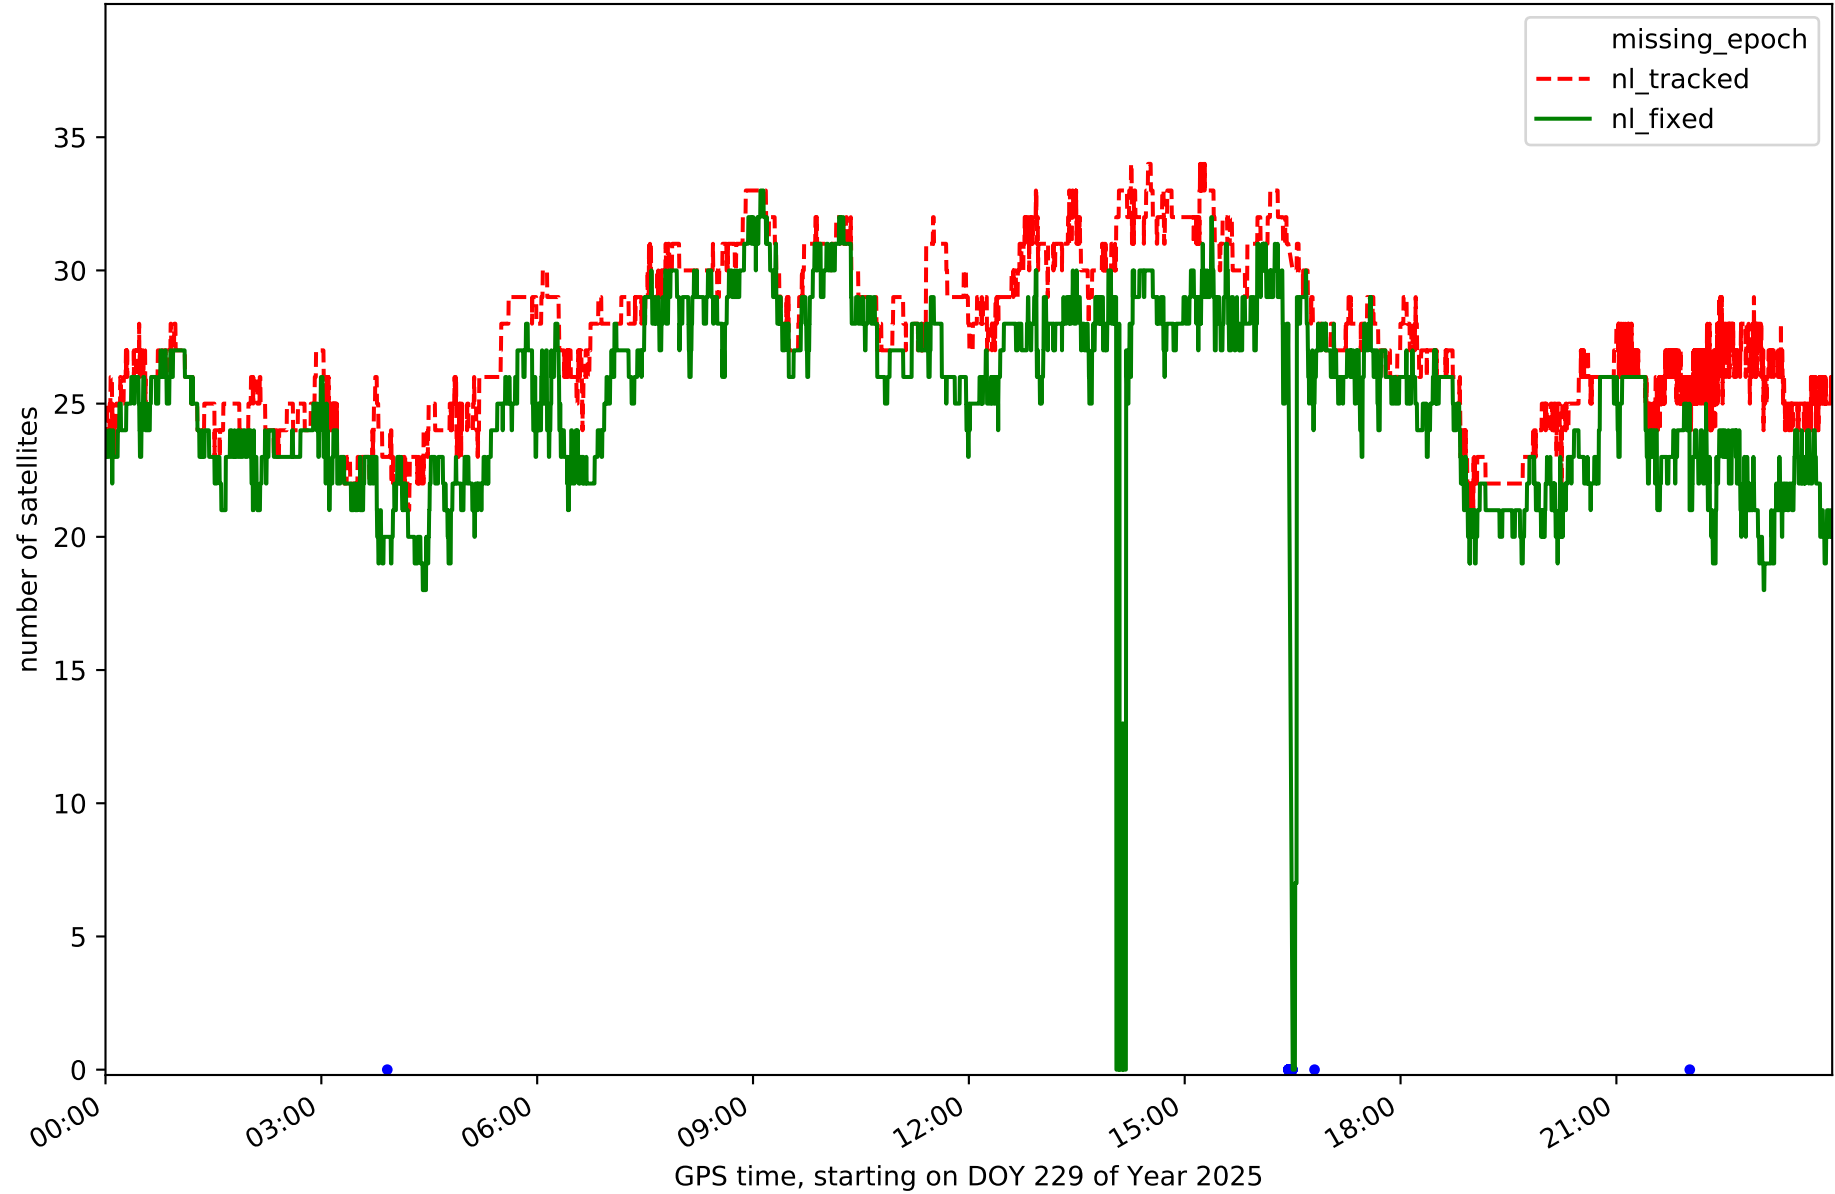


Station TN01 in network N32T

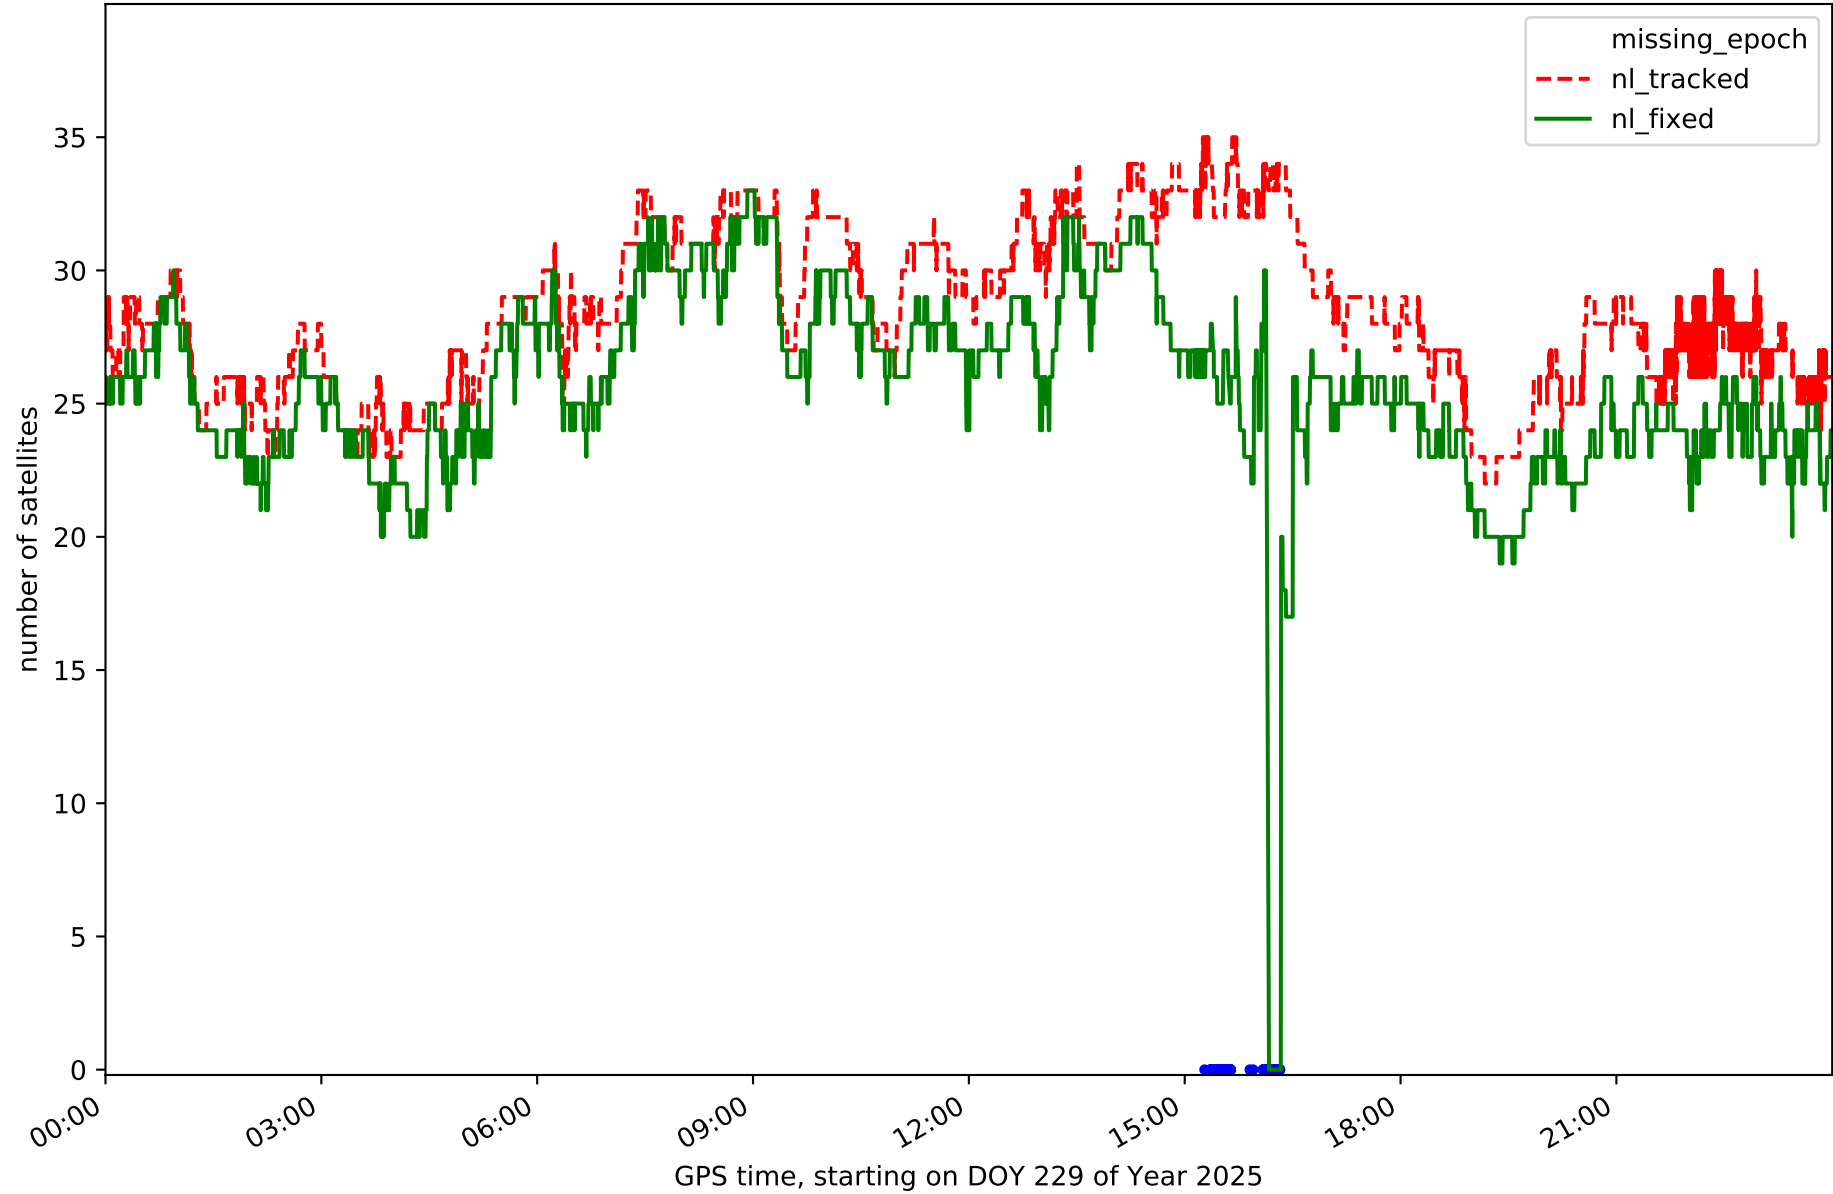


Station TN02 in network N32T

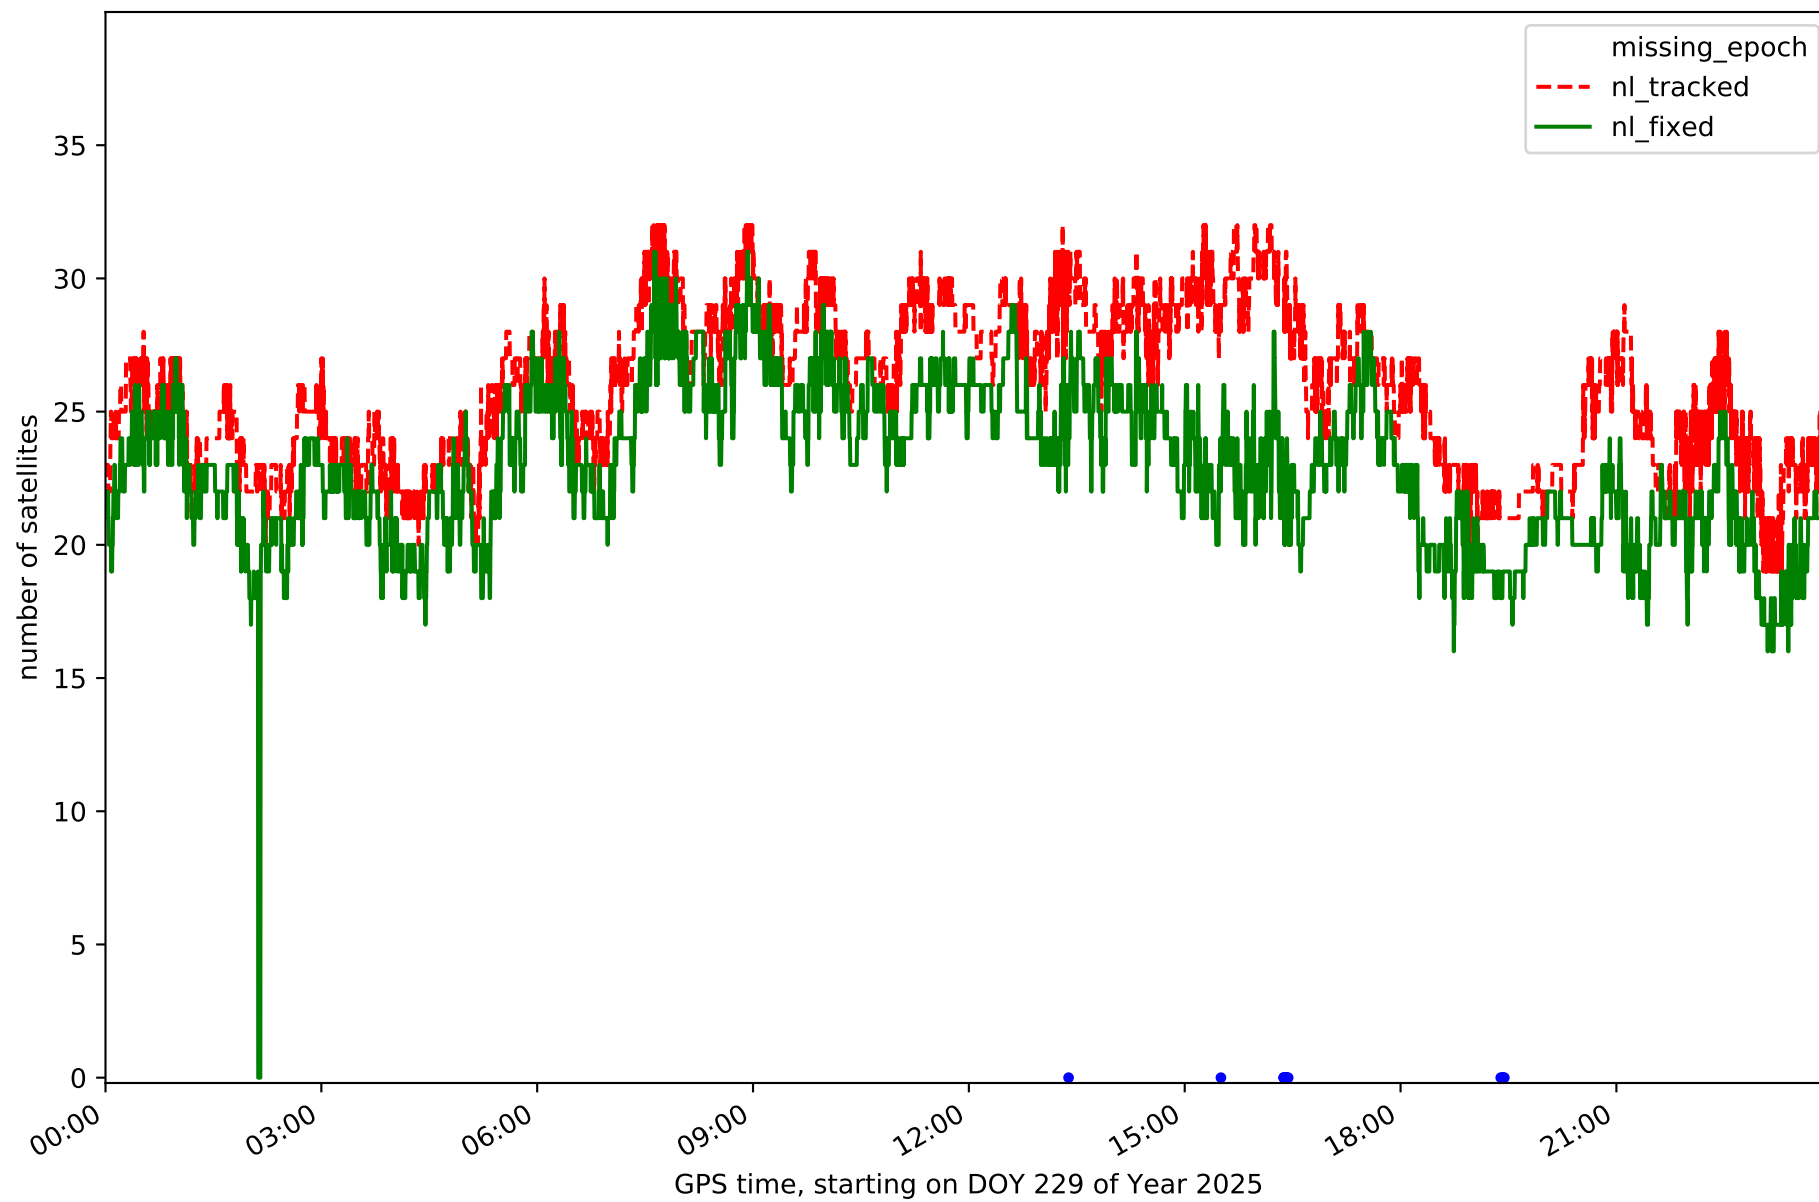


Station TN03 in network N32T

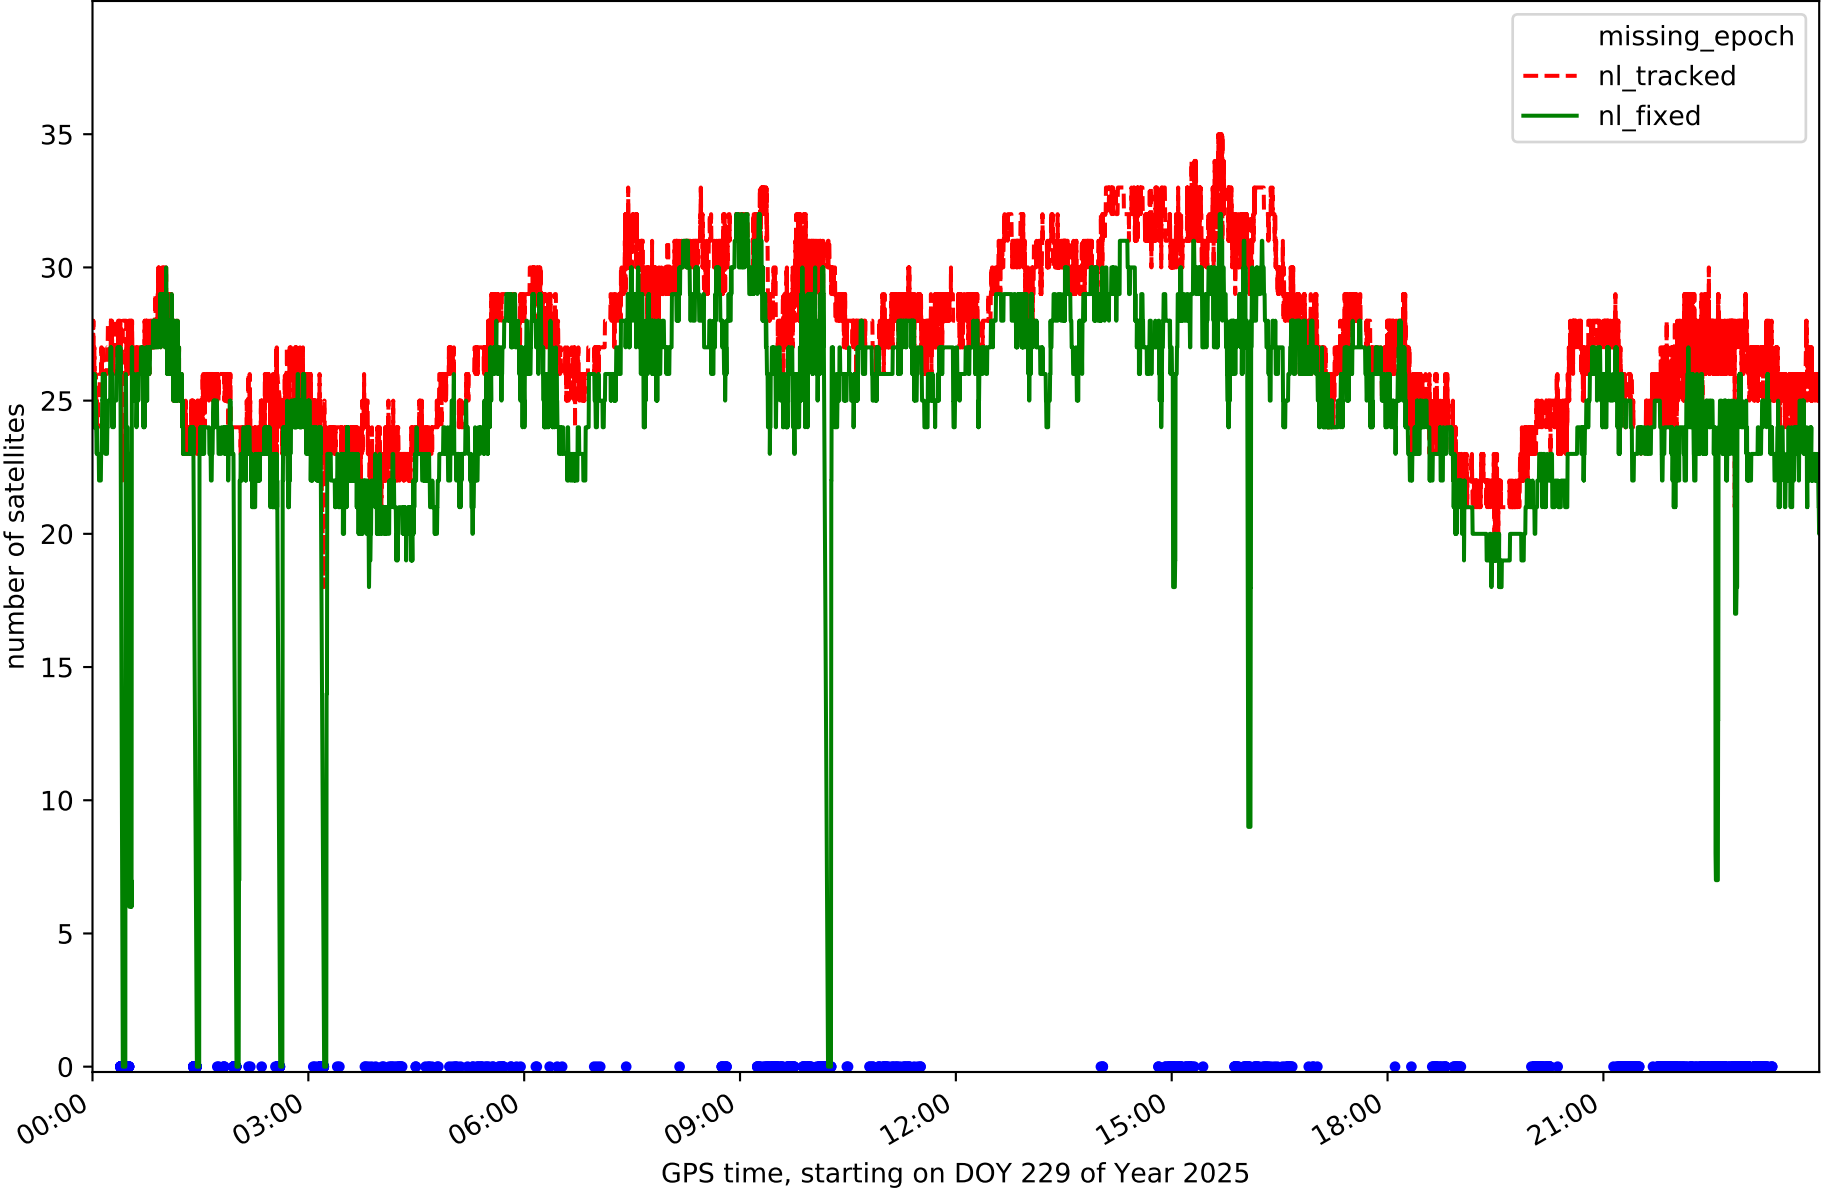


Station TN04 in network N32T

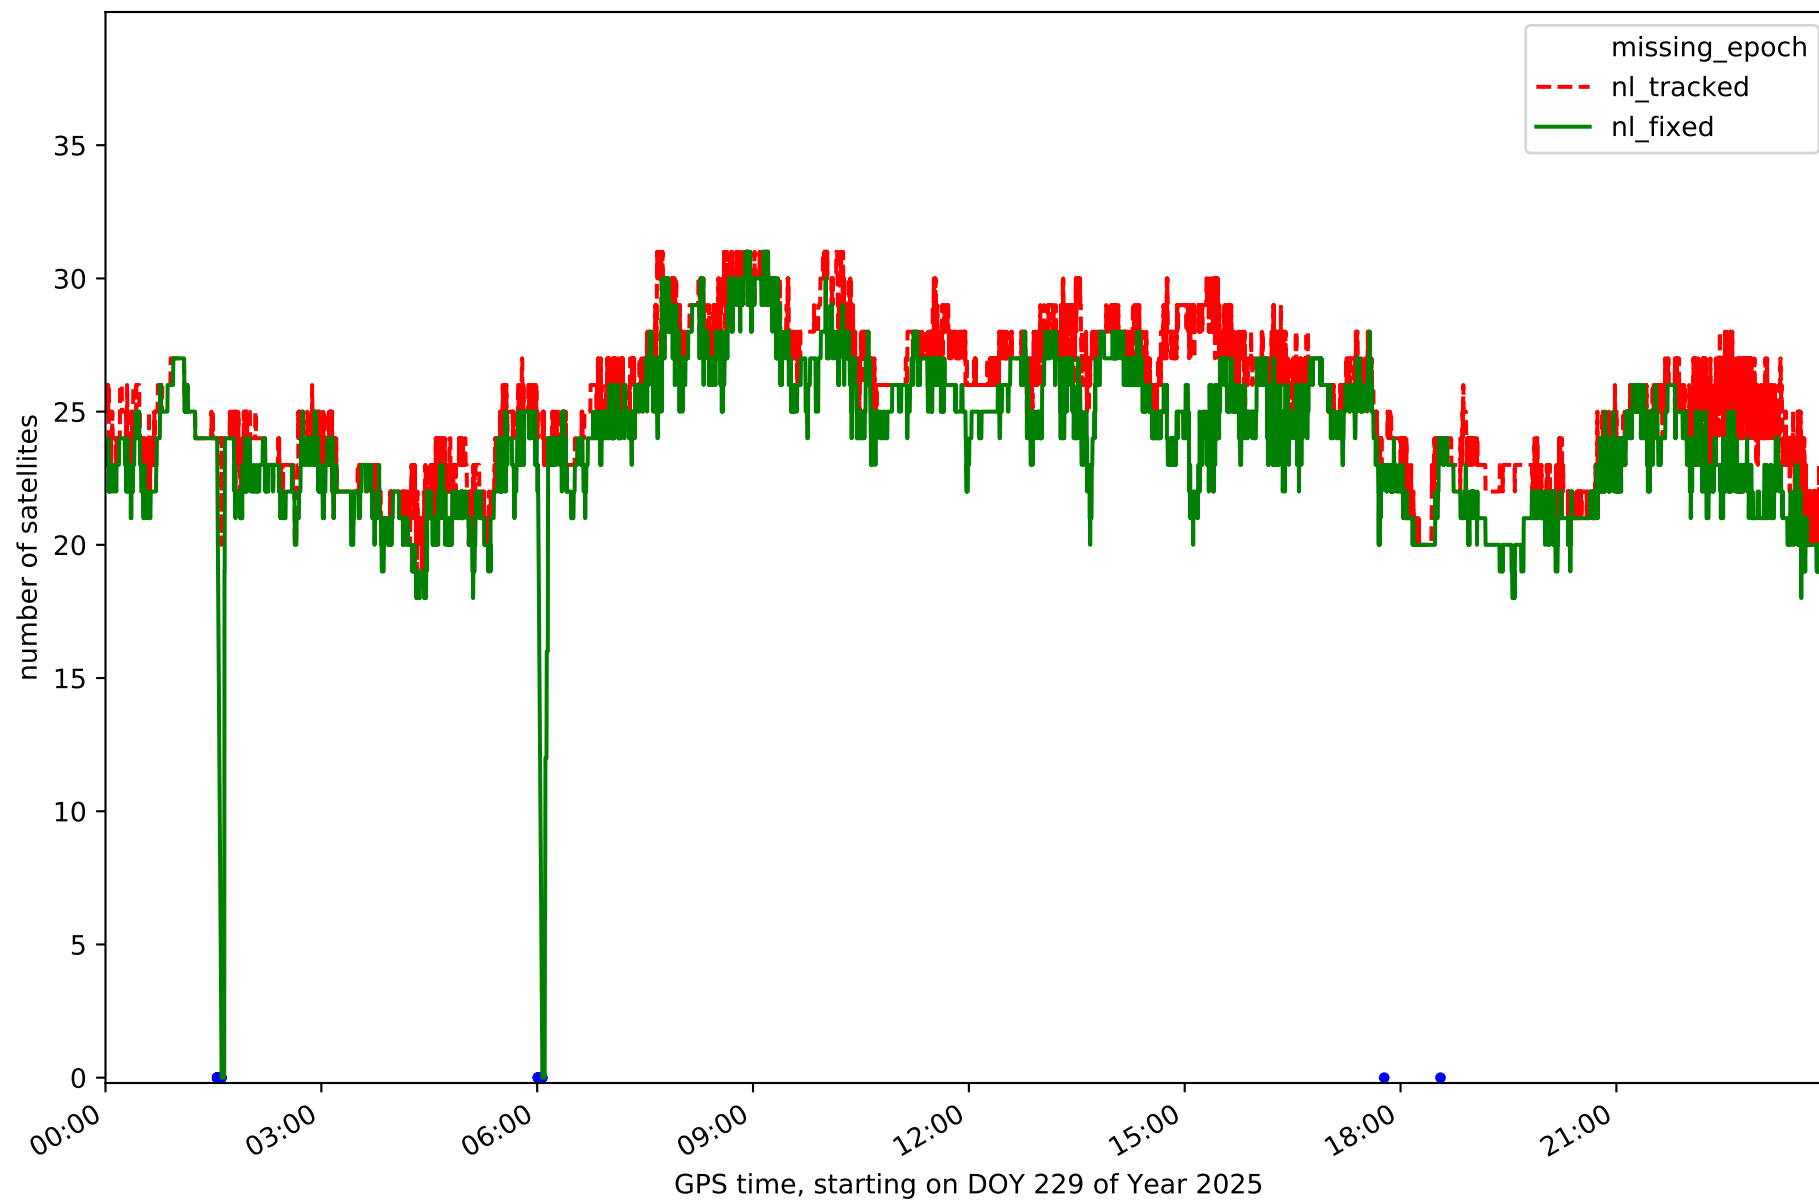


Station TN06 in network N32T

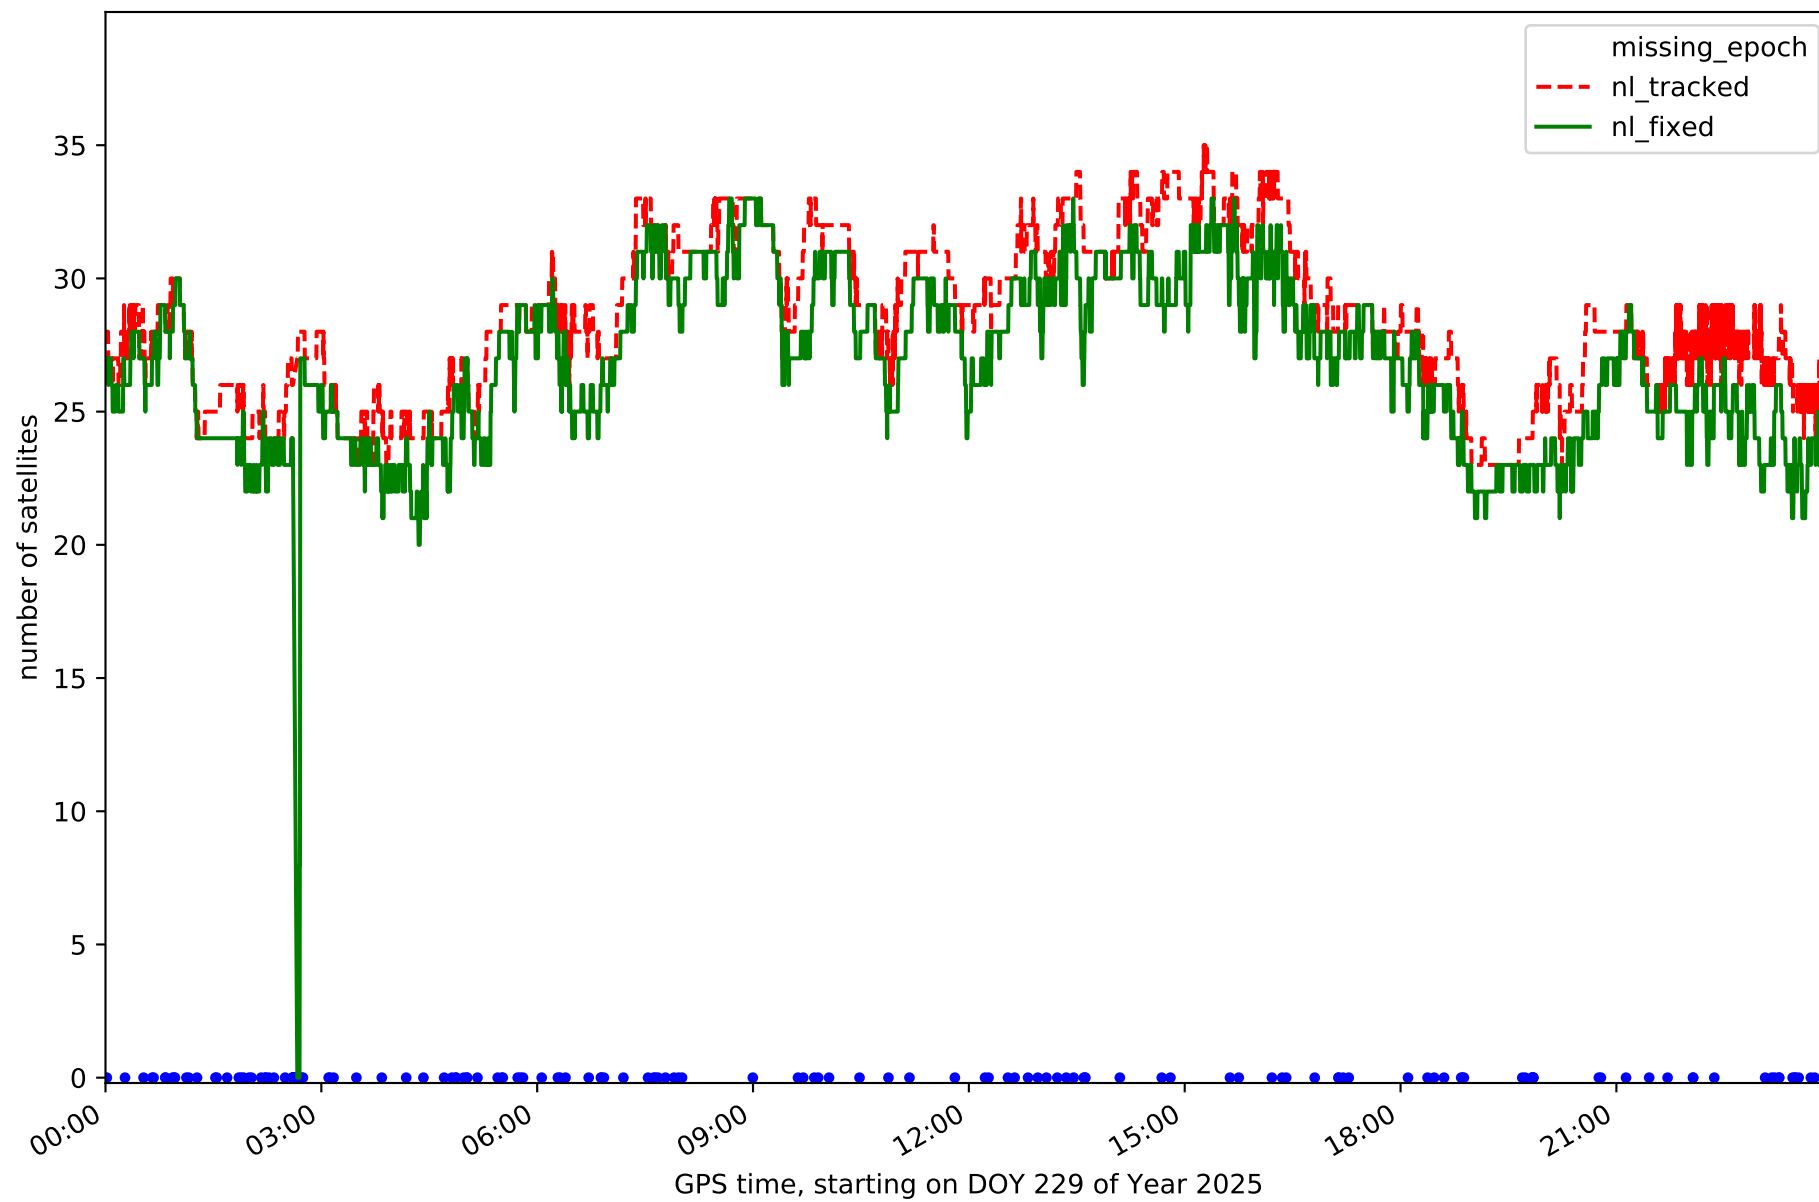


Station TN09 in network N32T

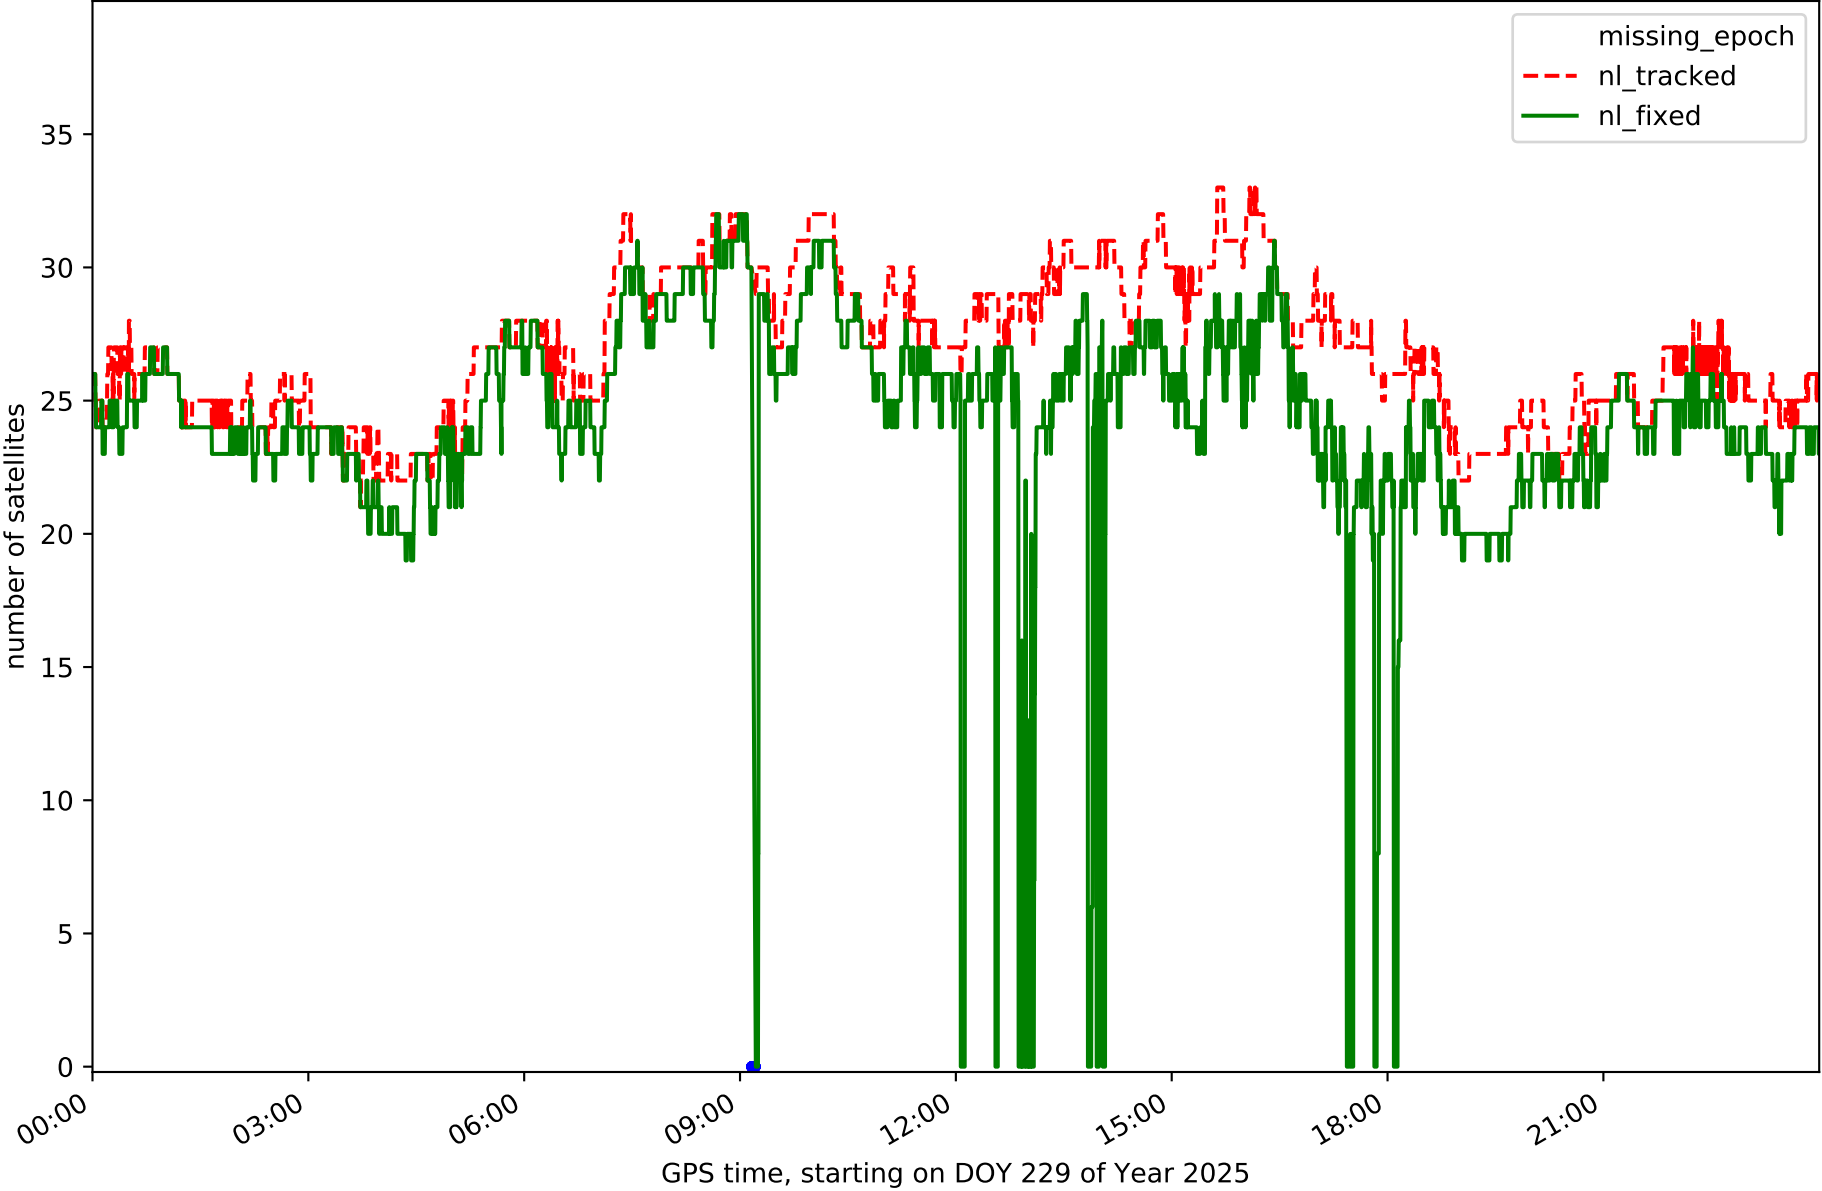


Station TE11 in network N32T

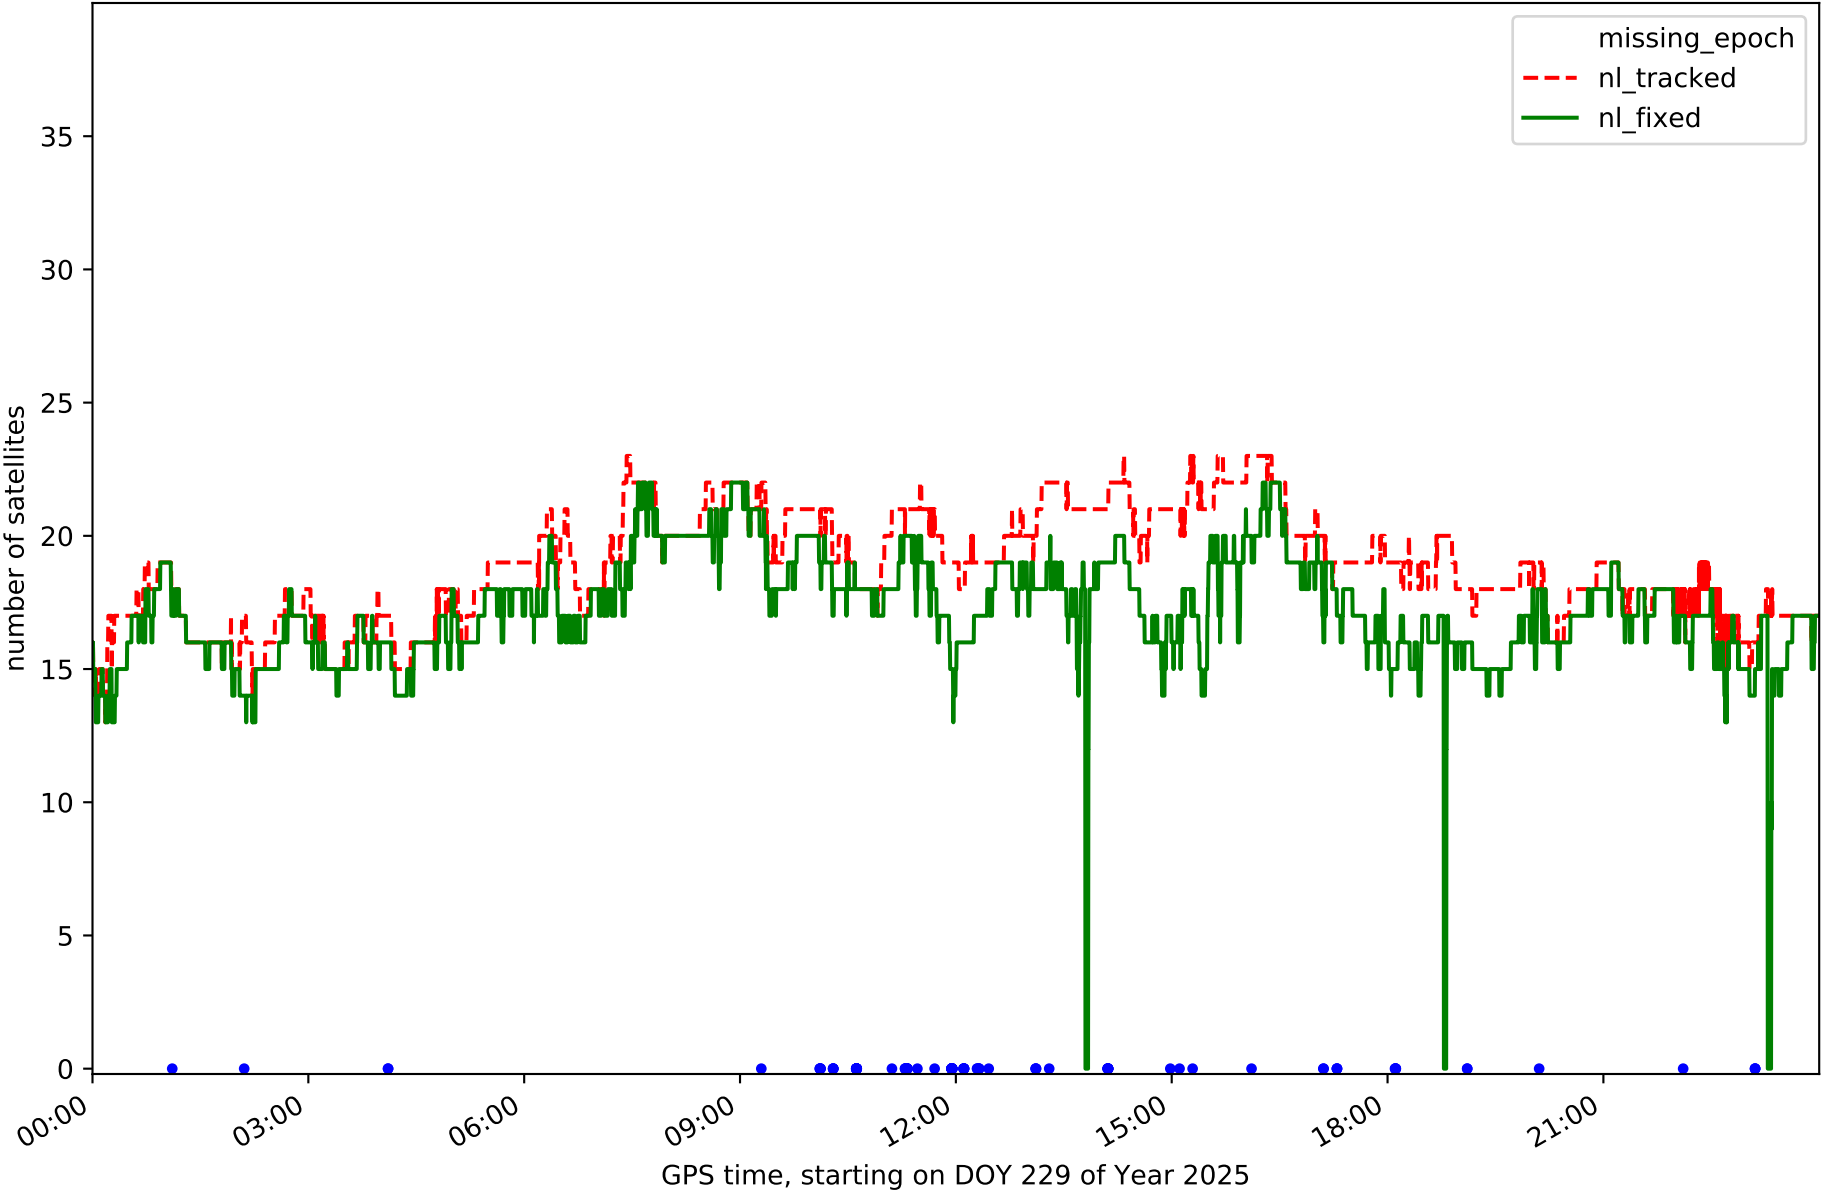


RefCheck for station EH01 in network N32T

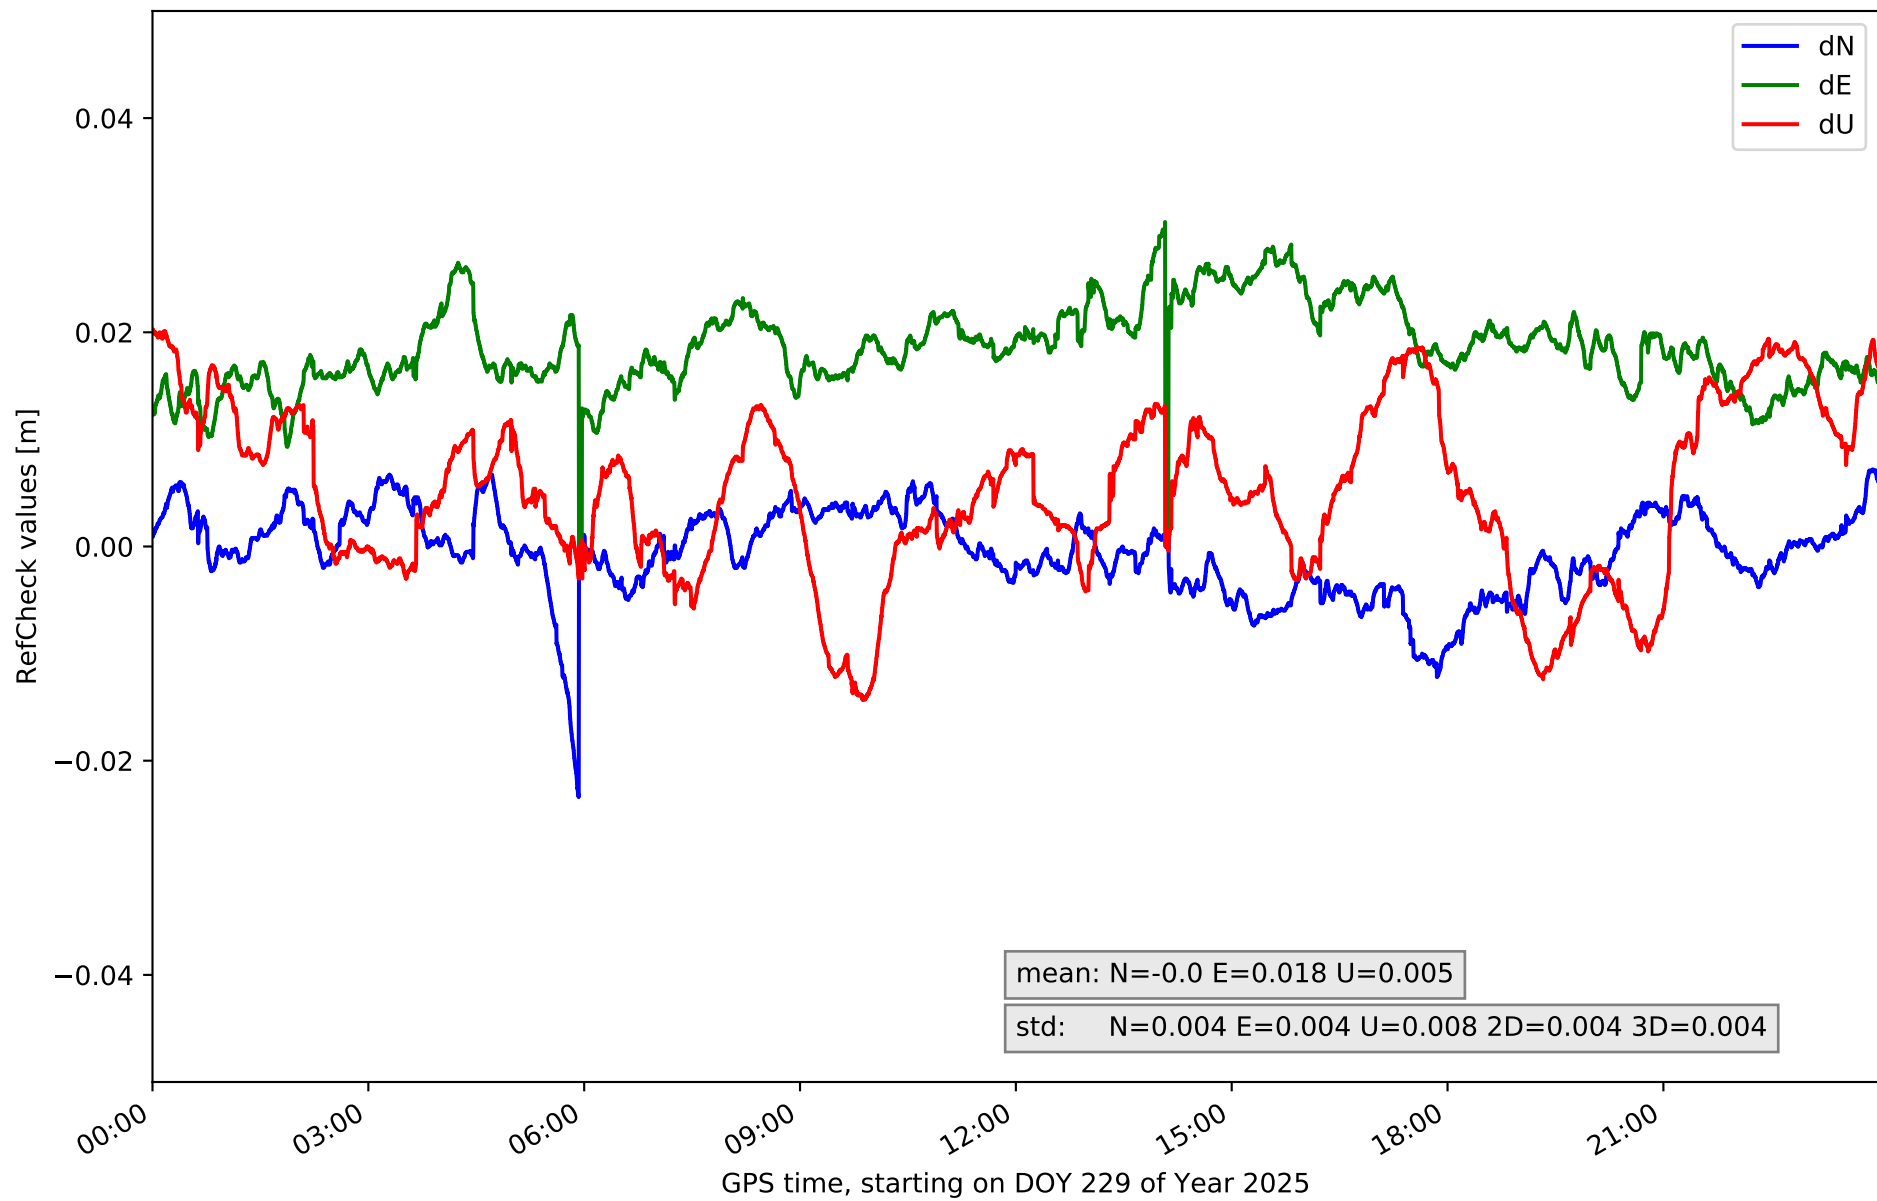


RefCheck for station EH02 in network N32T

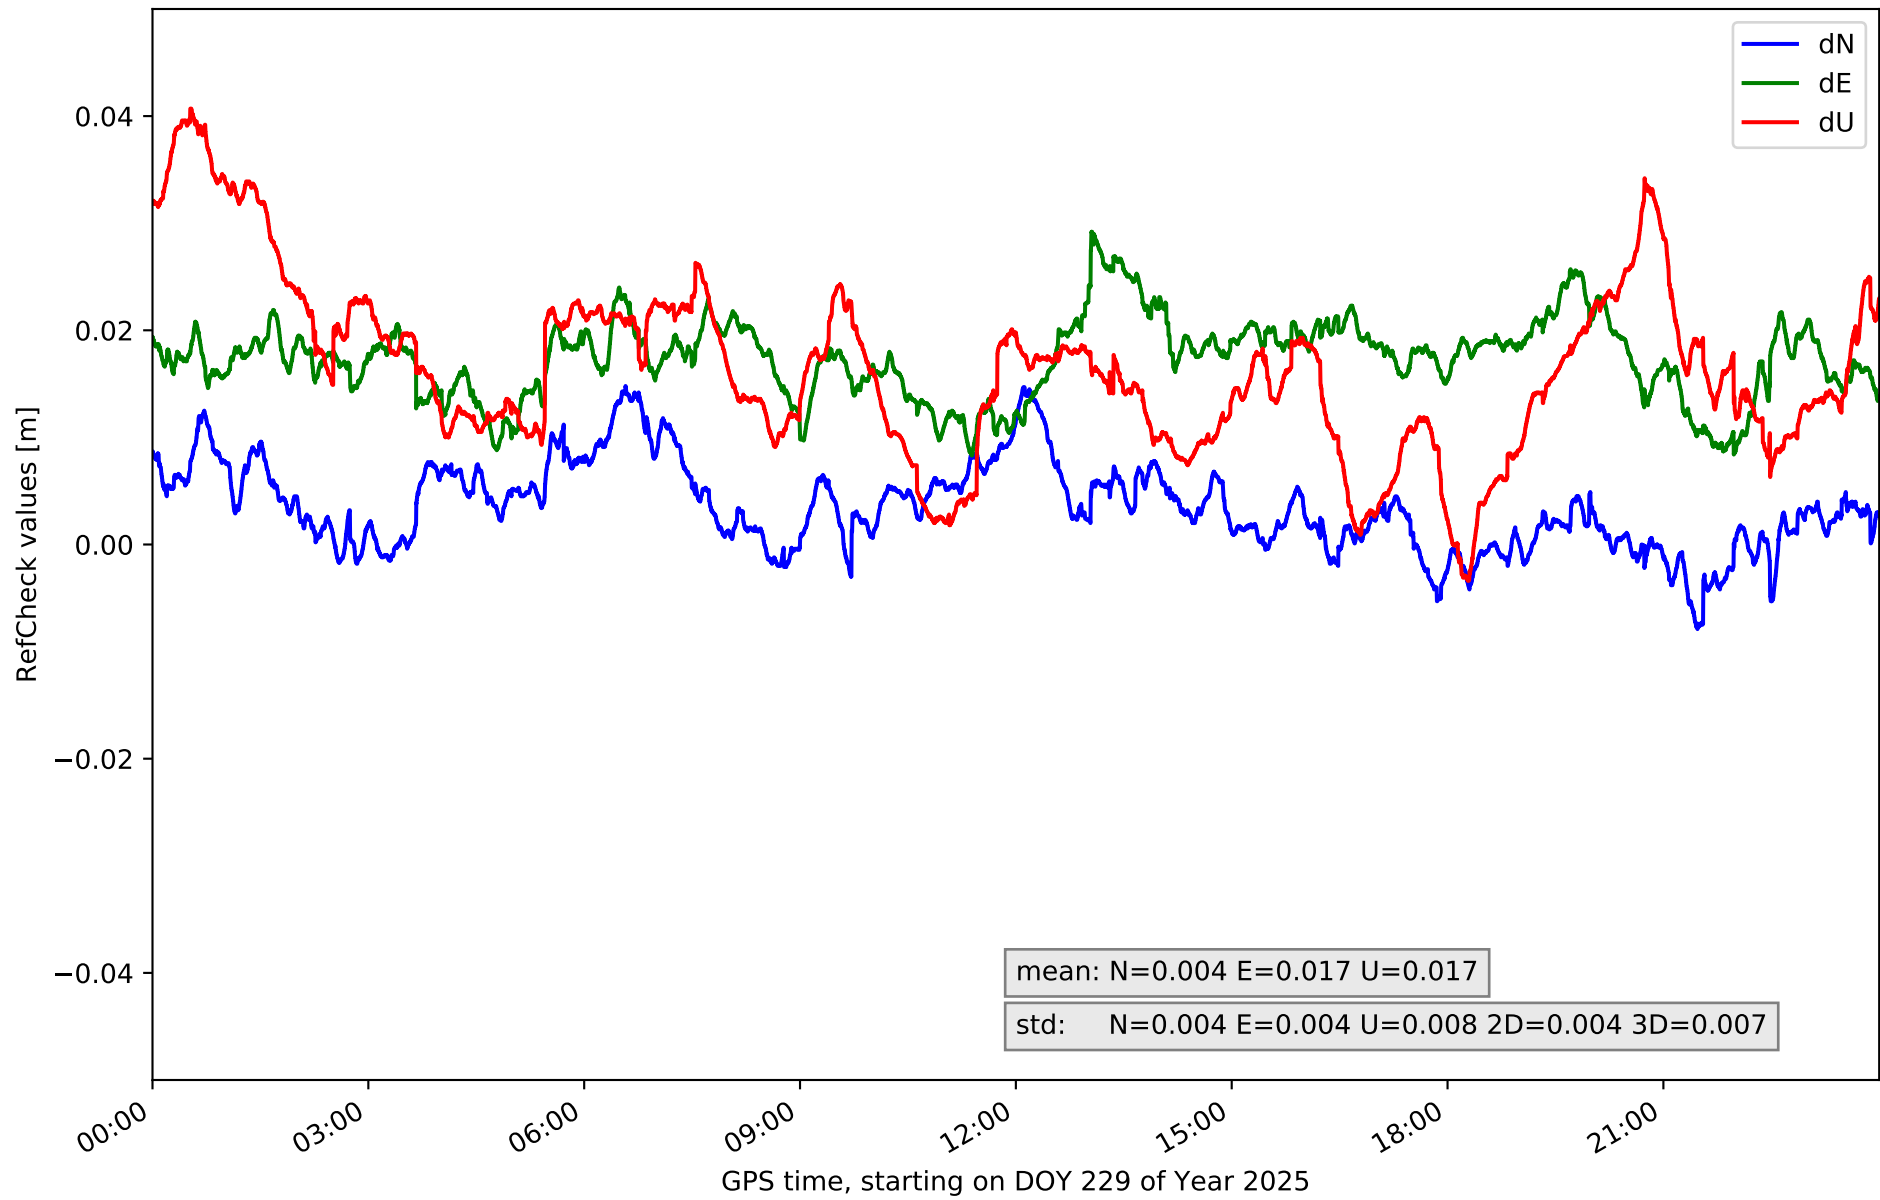


RefCheck for station GOM1 in network N32T

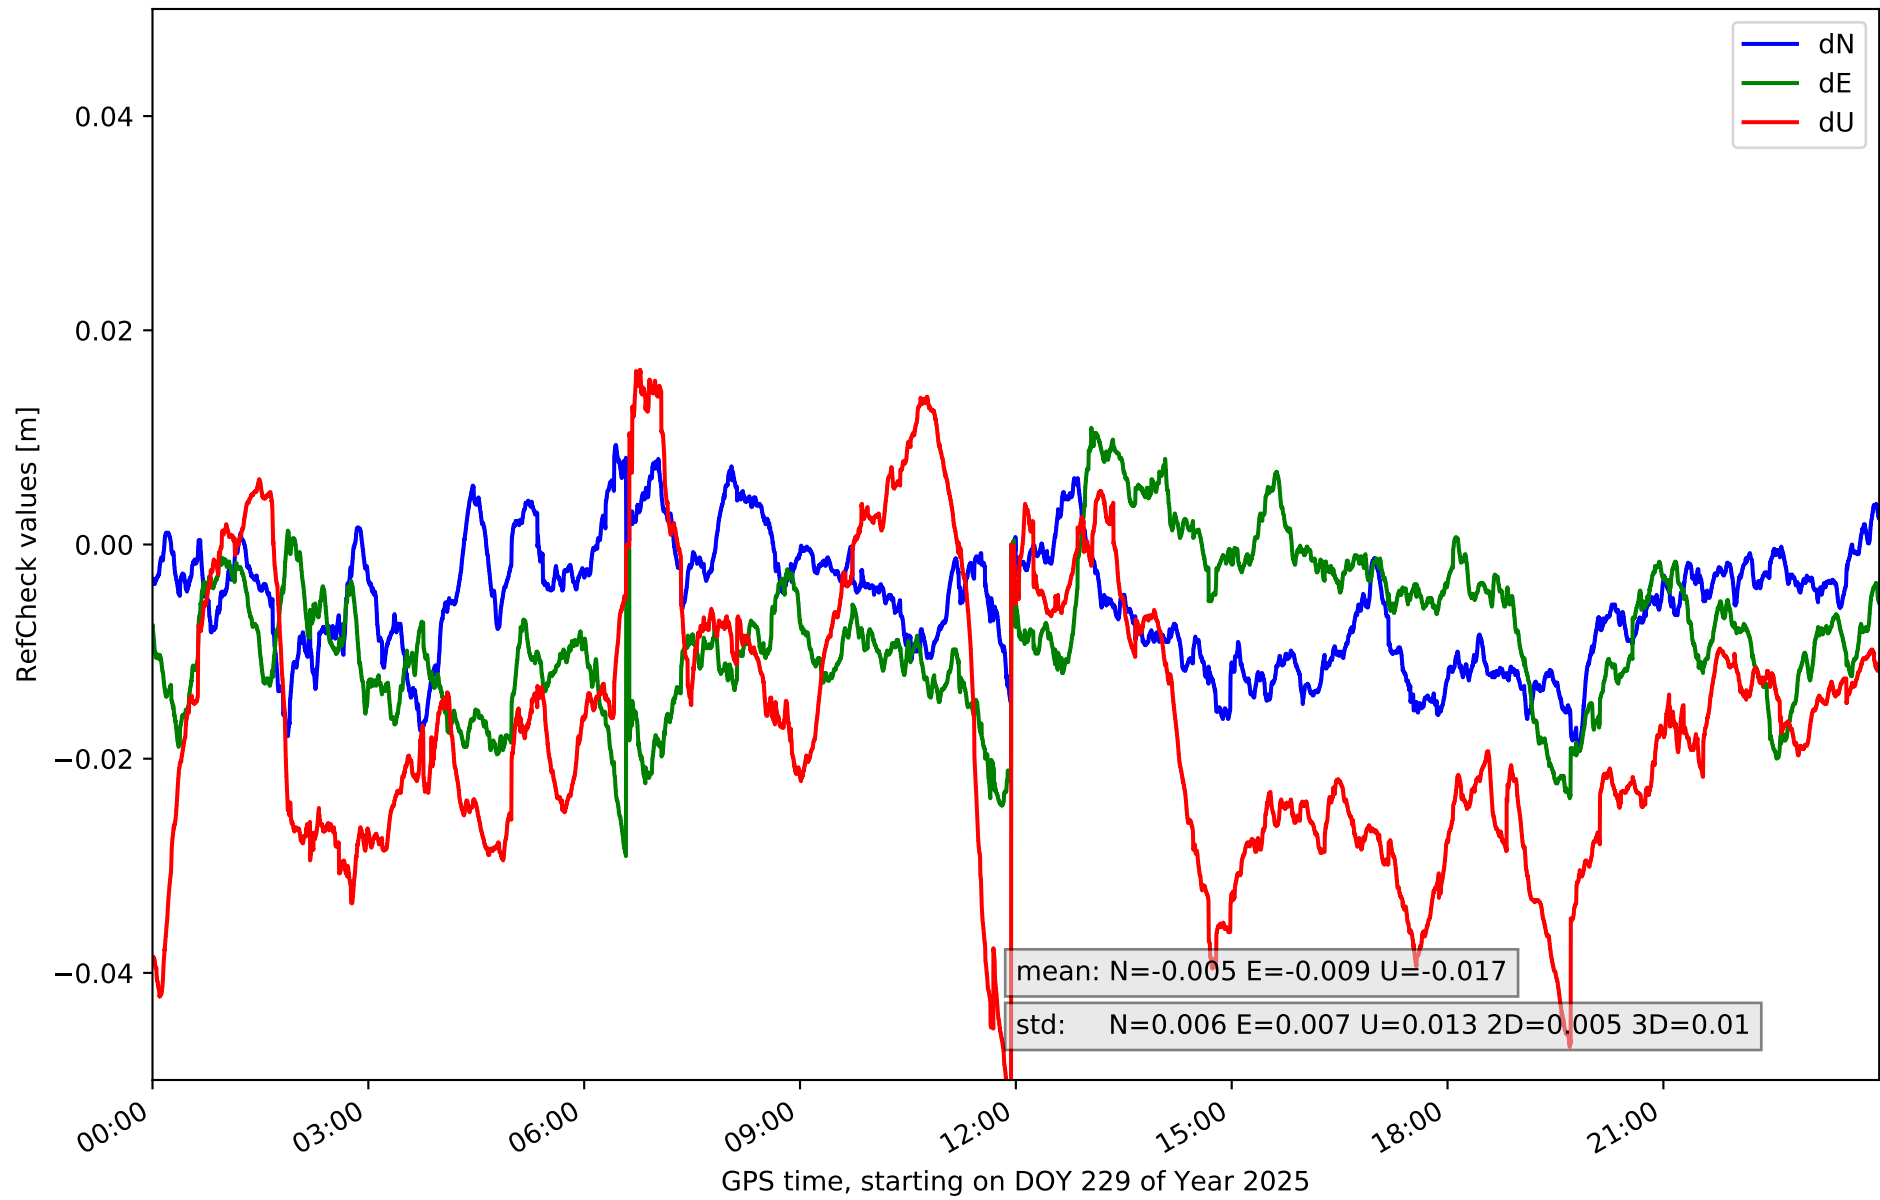


RefCheck for station IZAN in network N32T

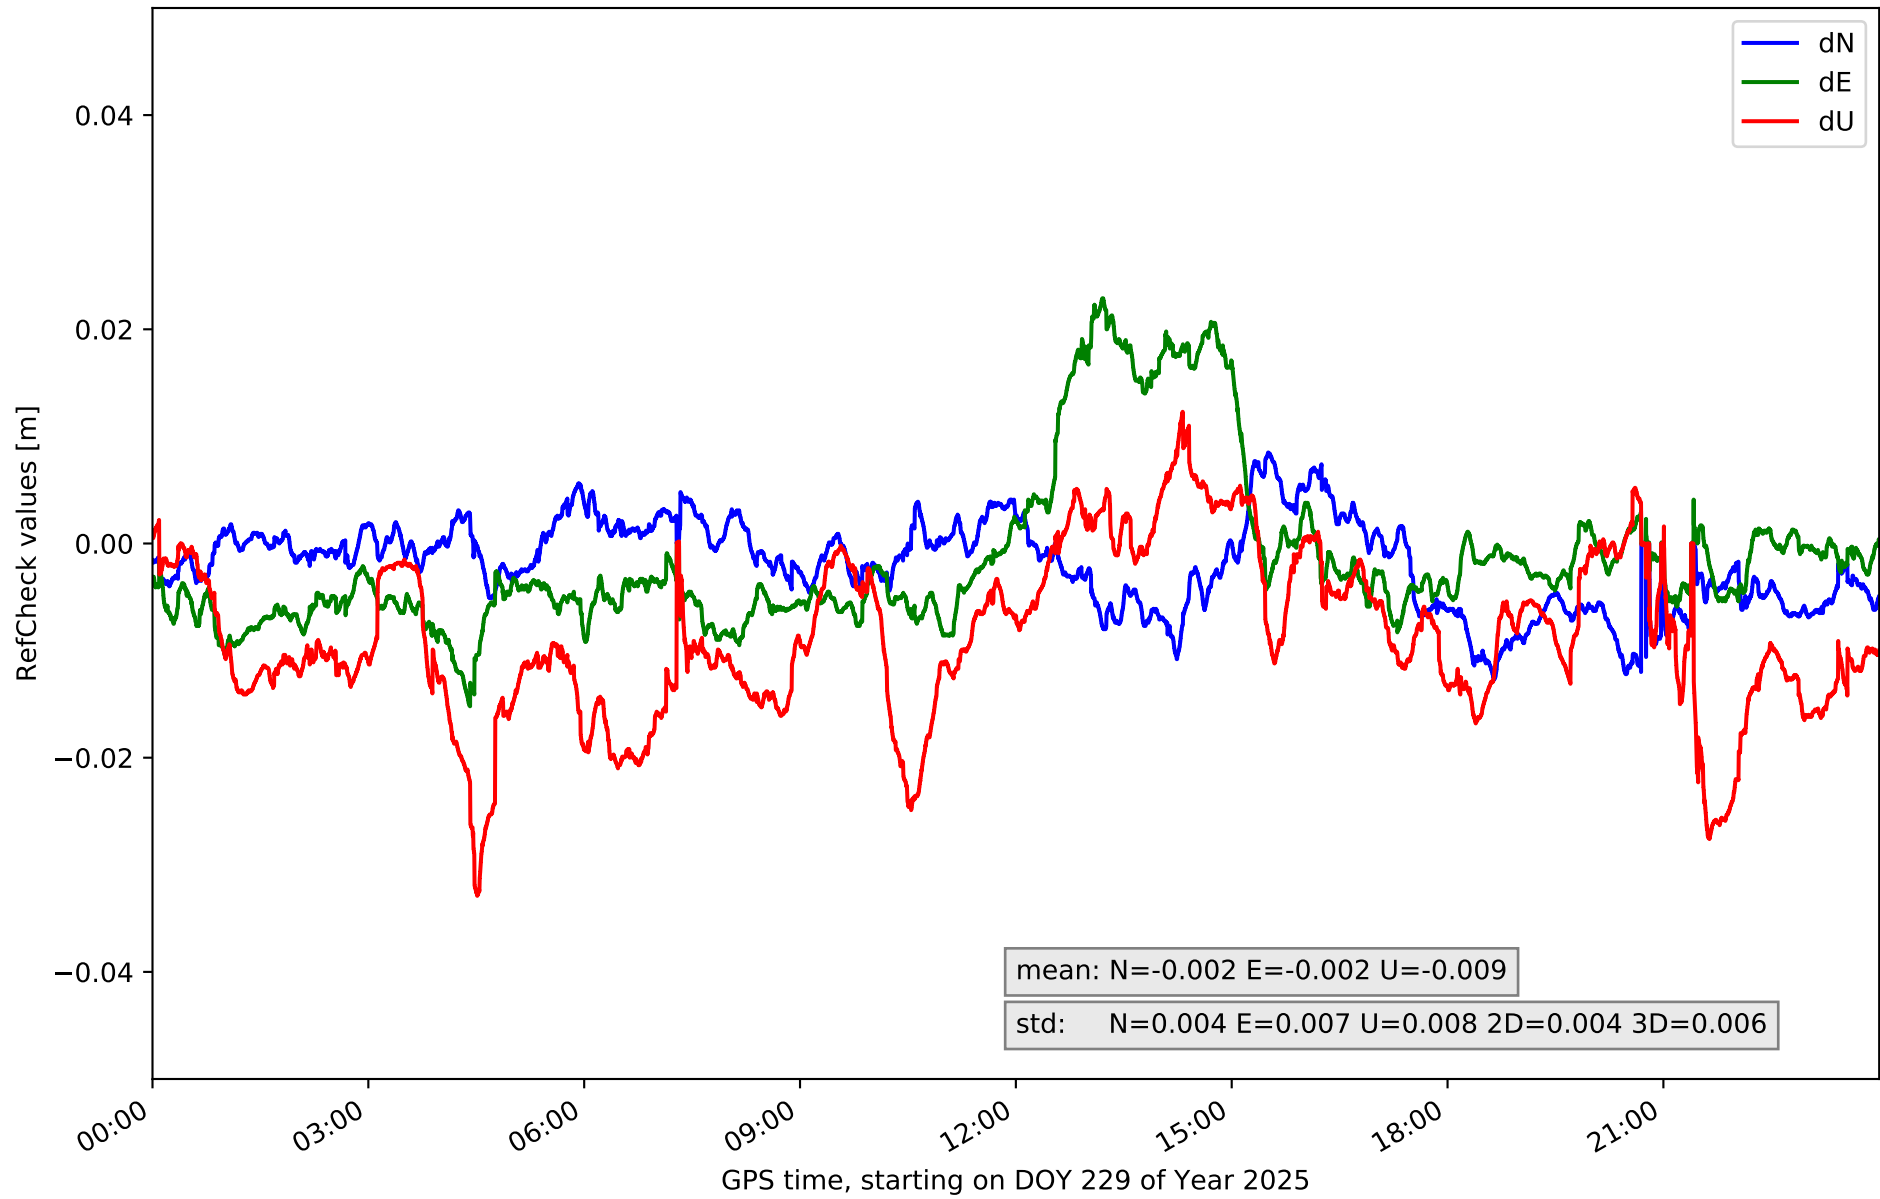


RefCheck for station LP01 in network N32T

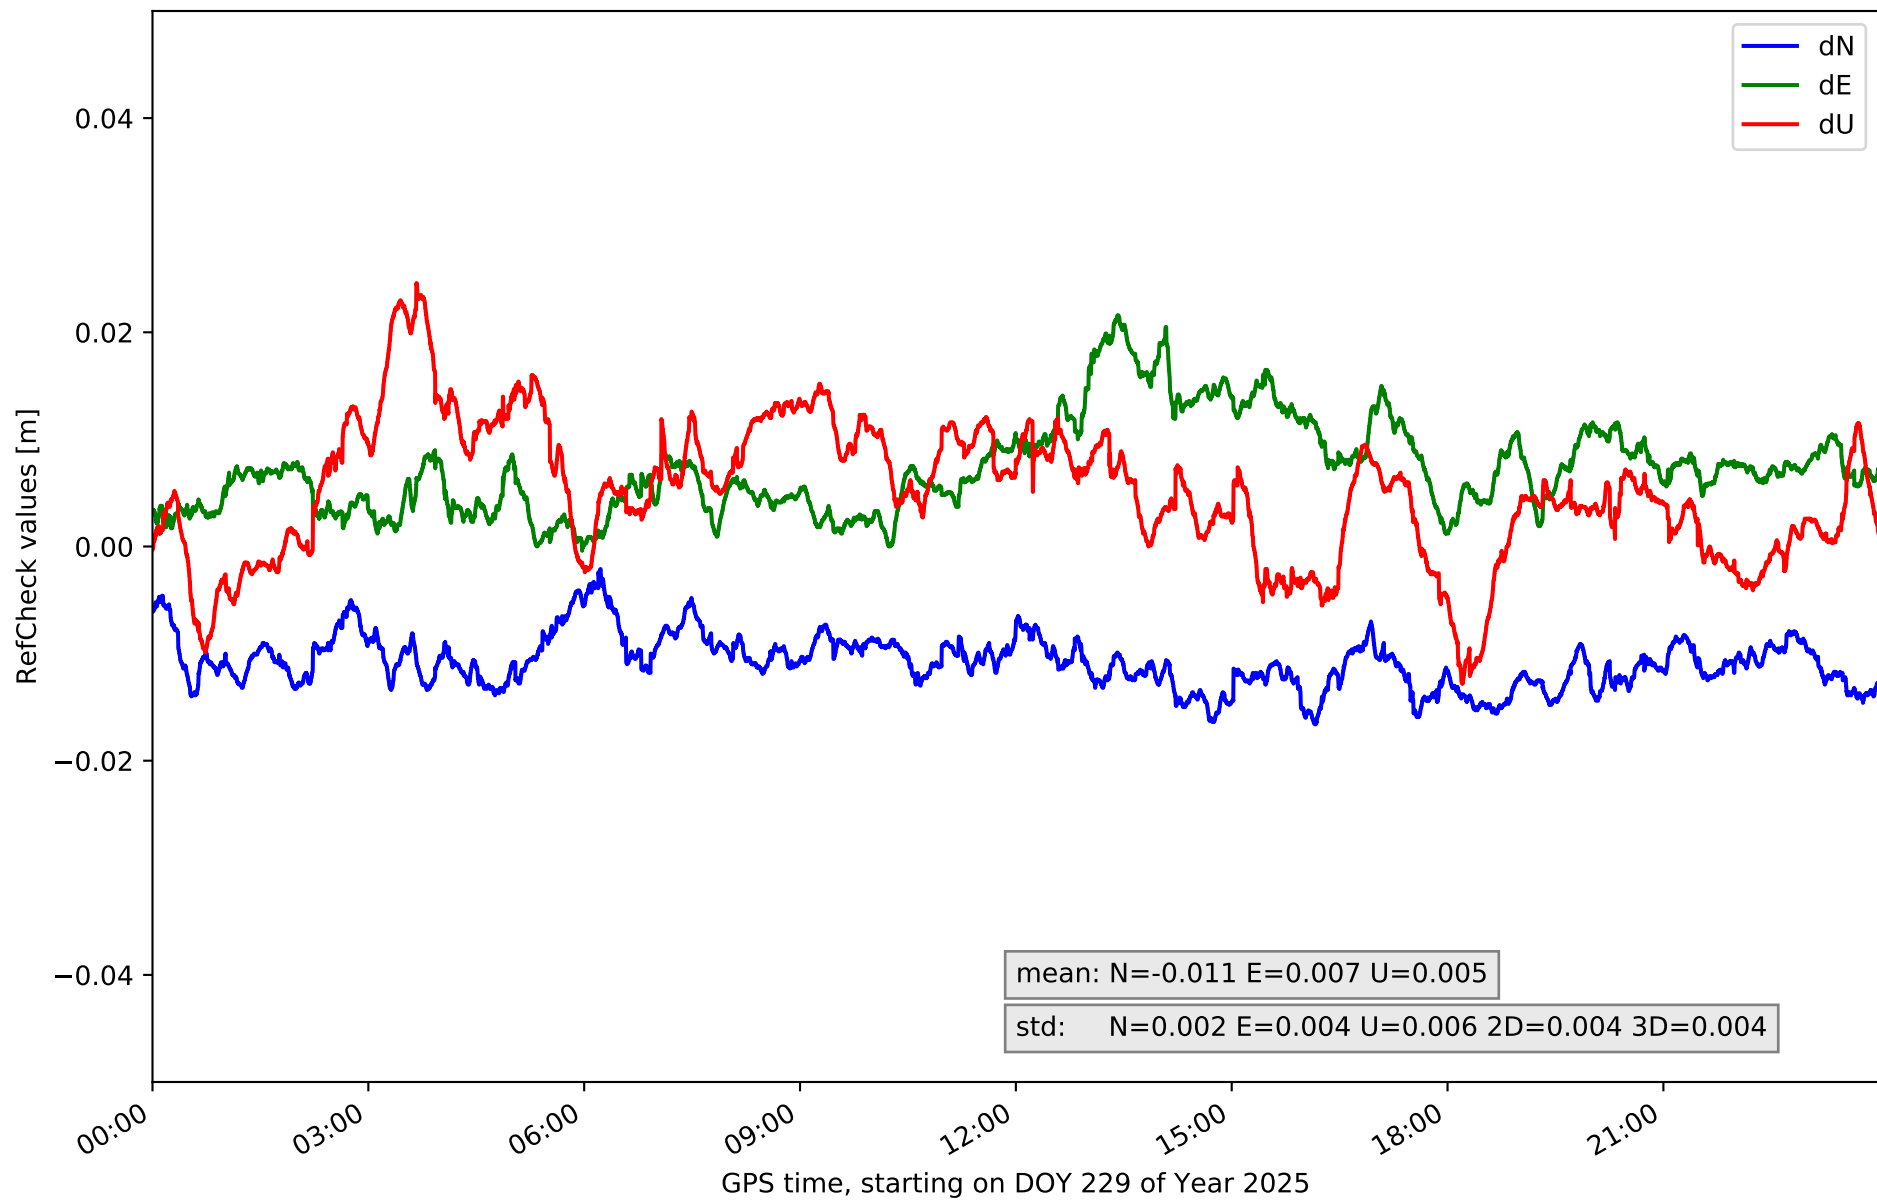


RefCheck for station LP03 in network N32T

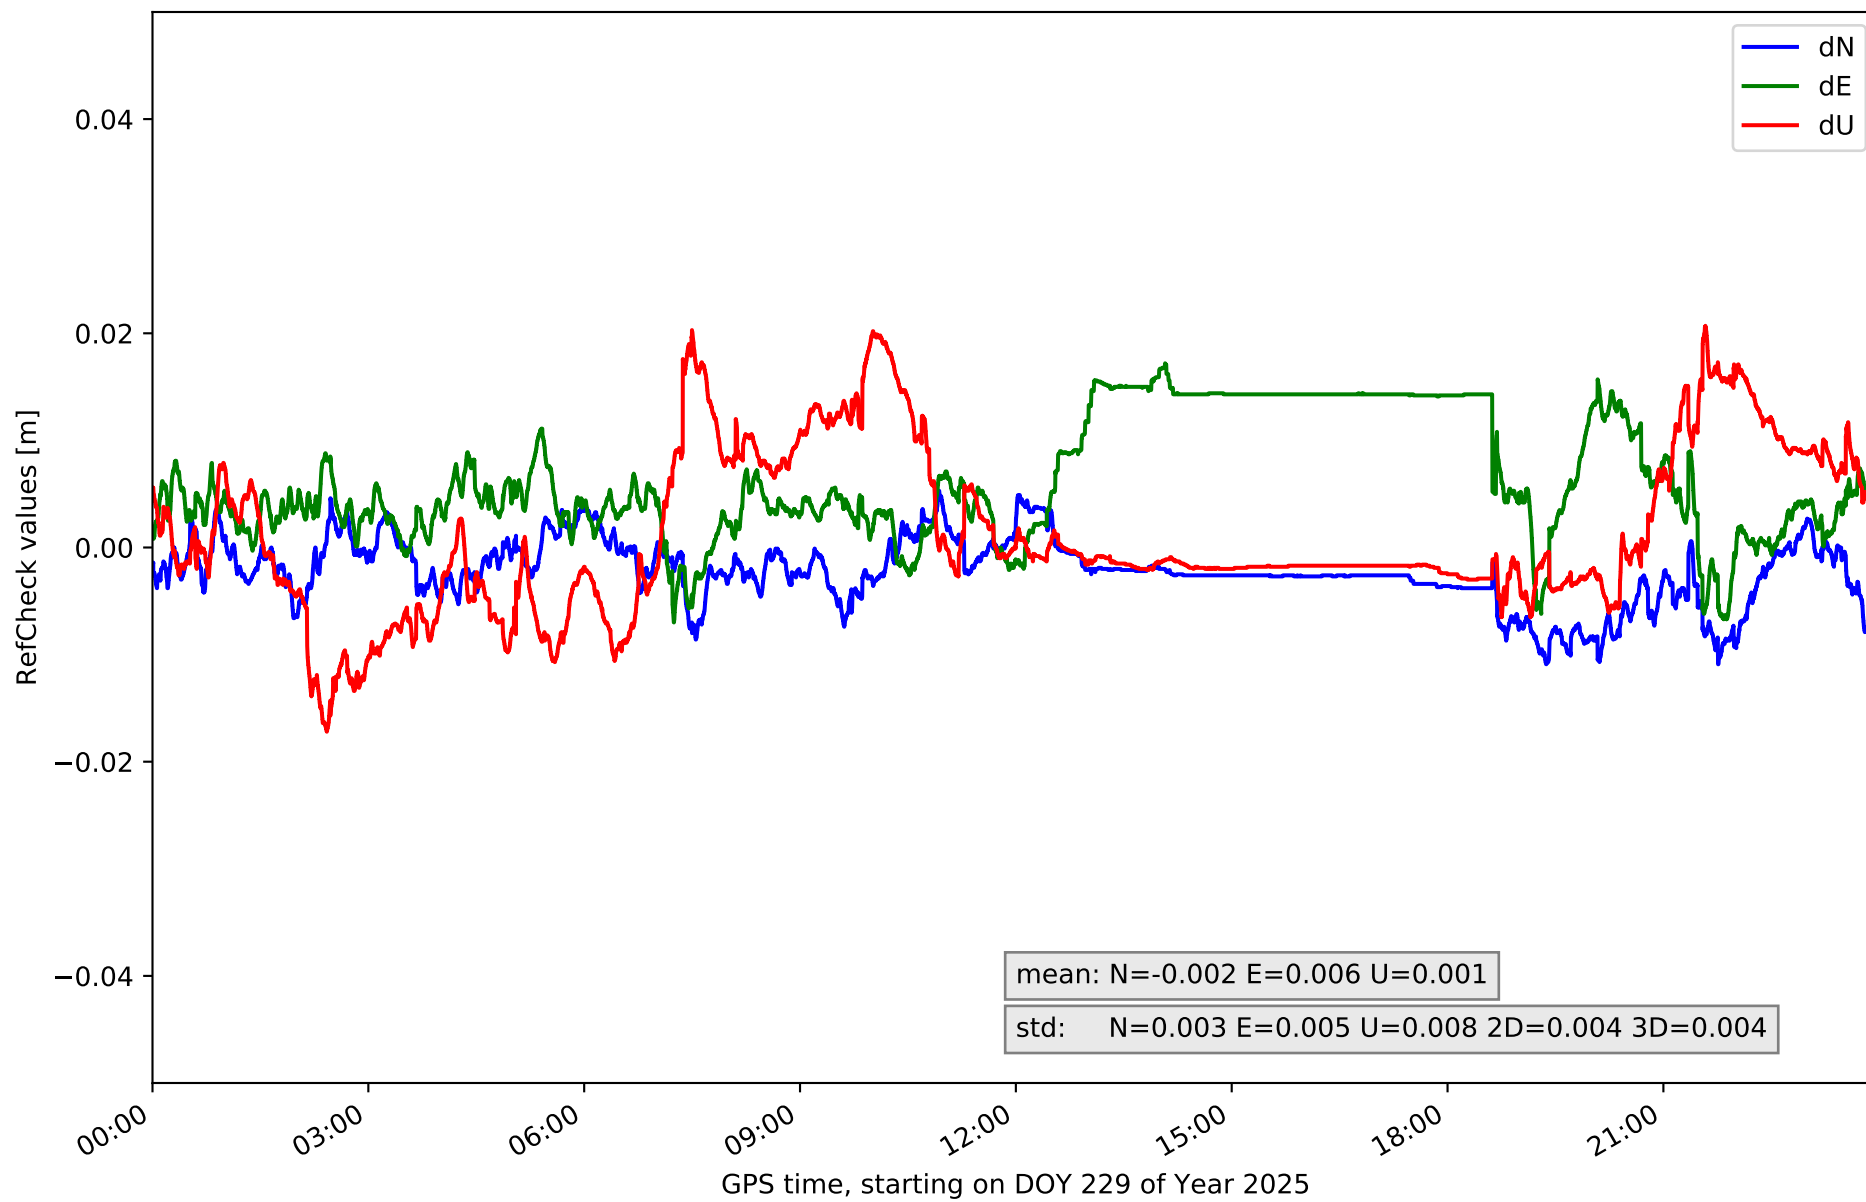


RefCheck for station LPAL in network N32T

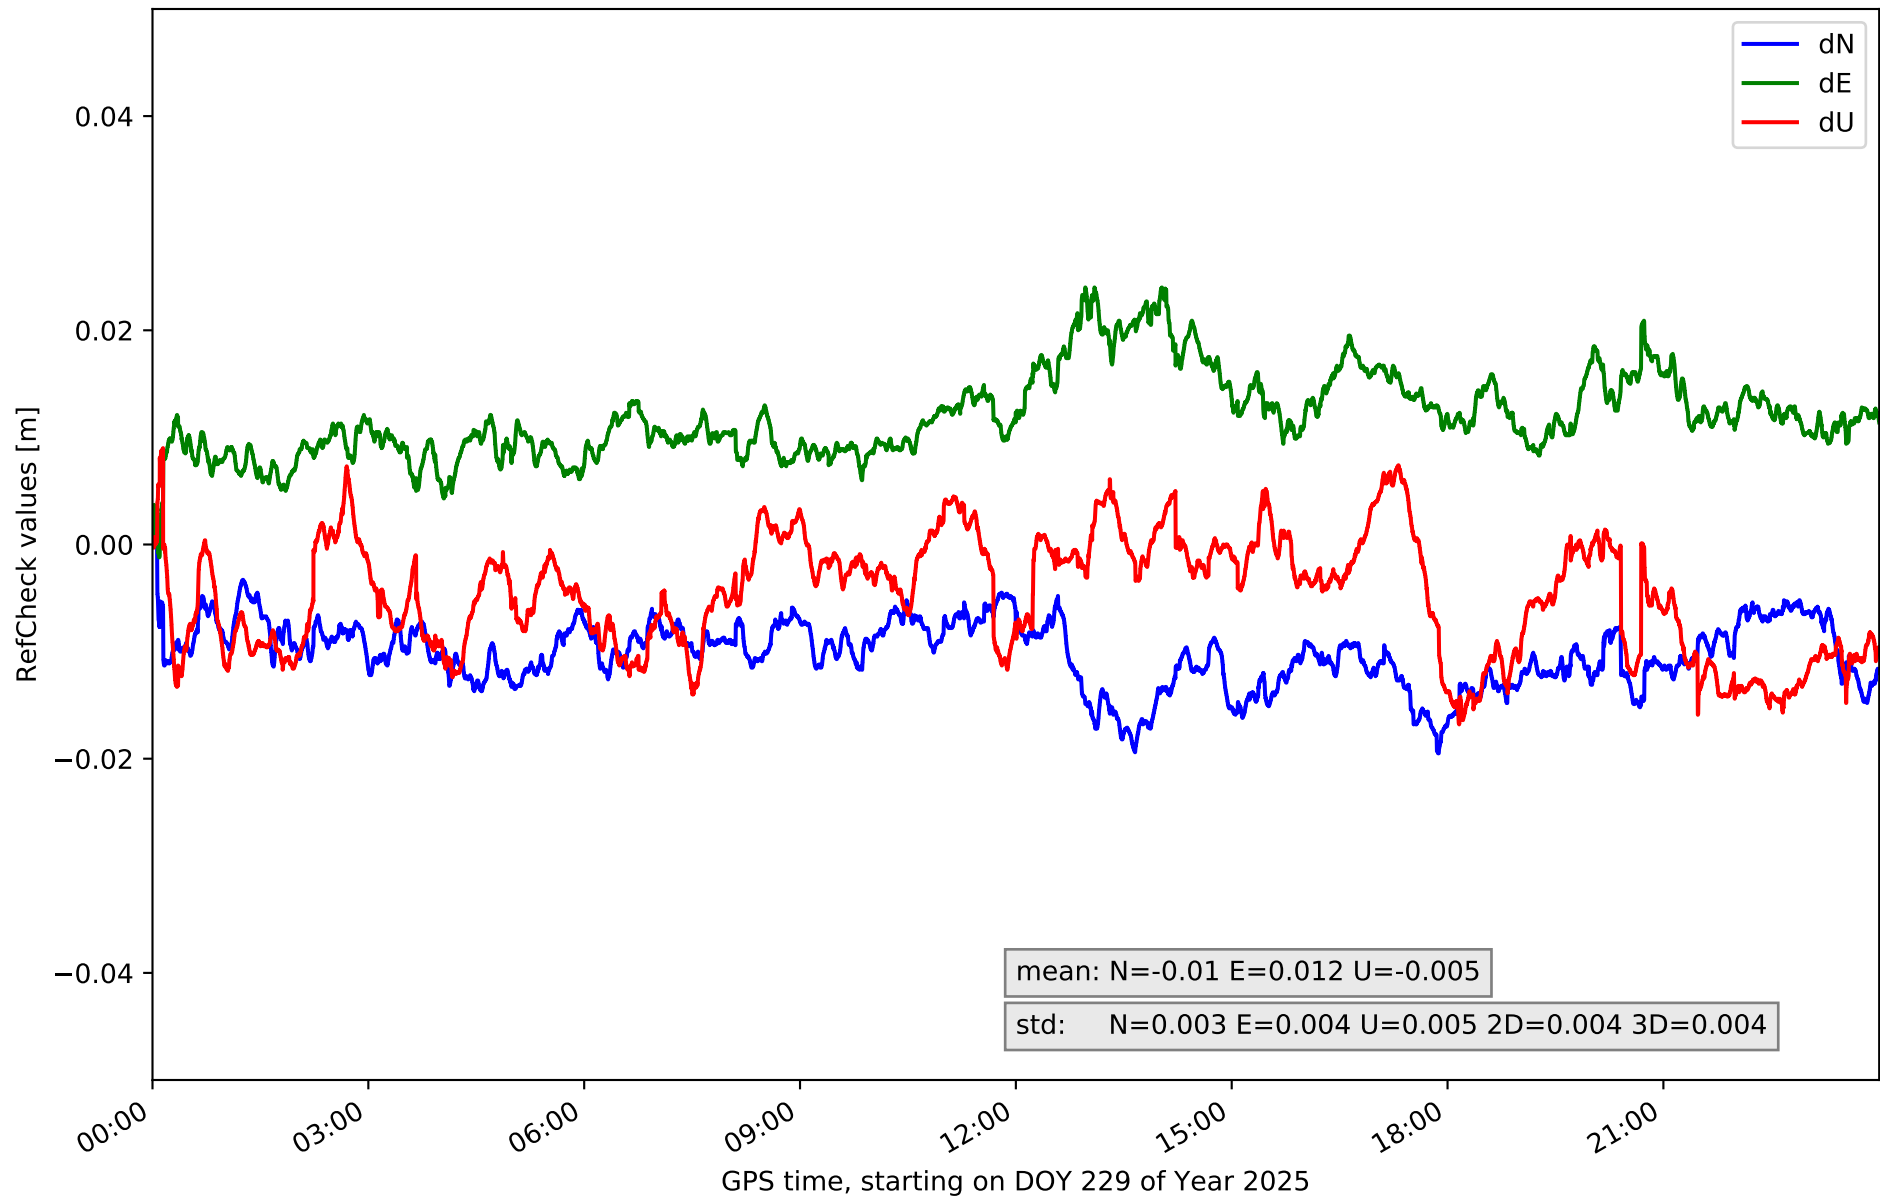


RefCheck for station LRES in network N32T

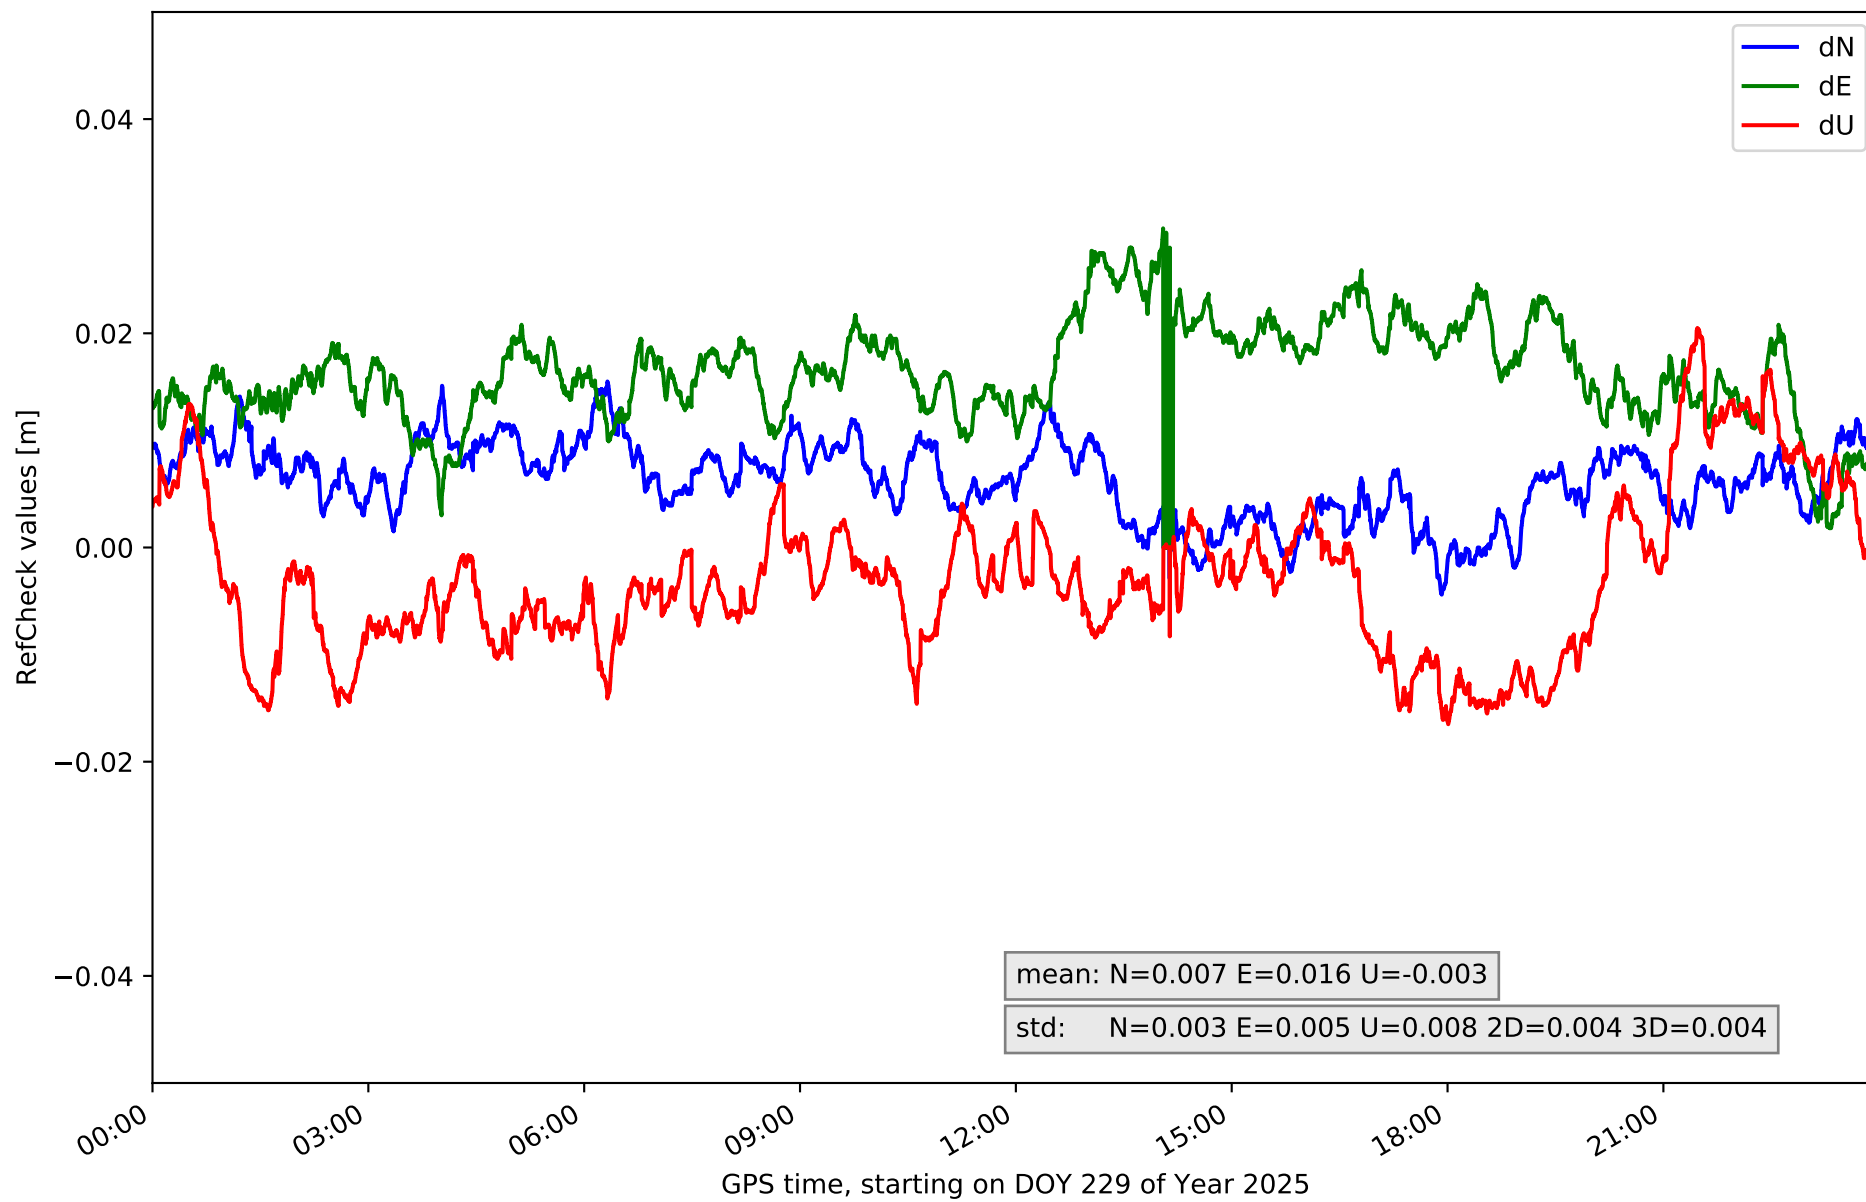


RefCheck for station TN01 in network N32T

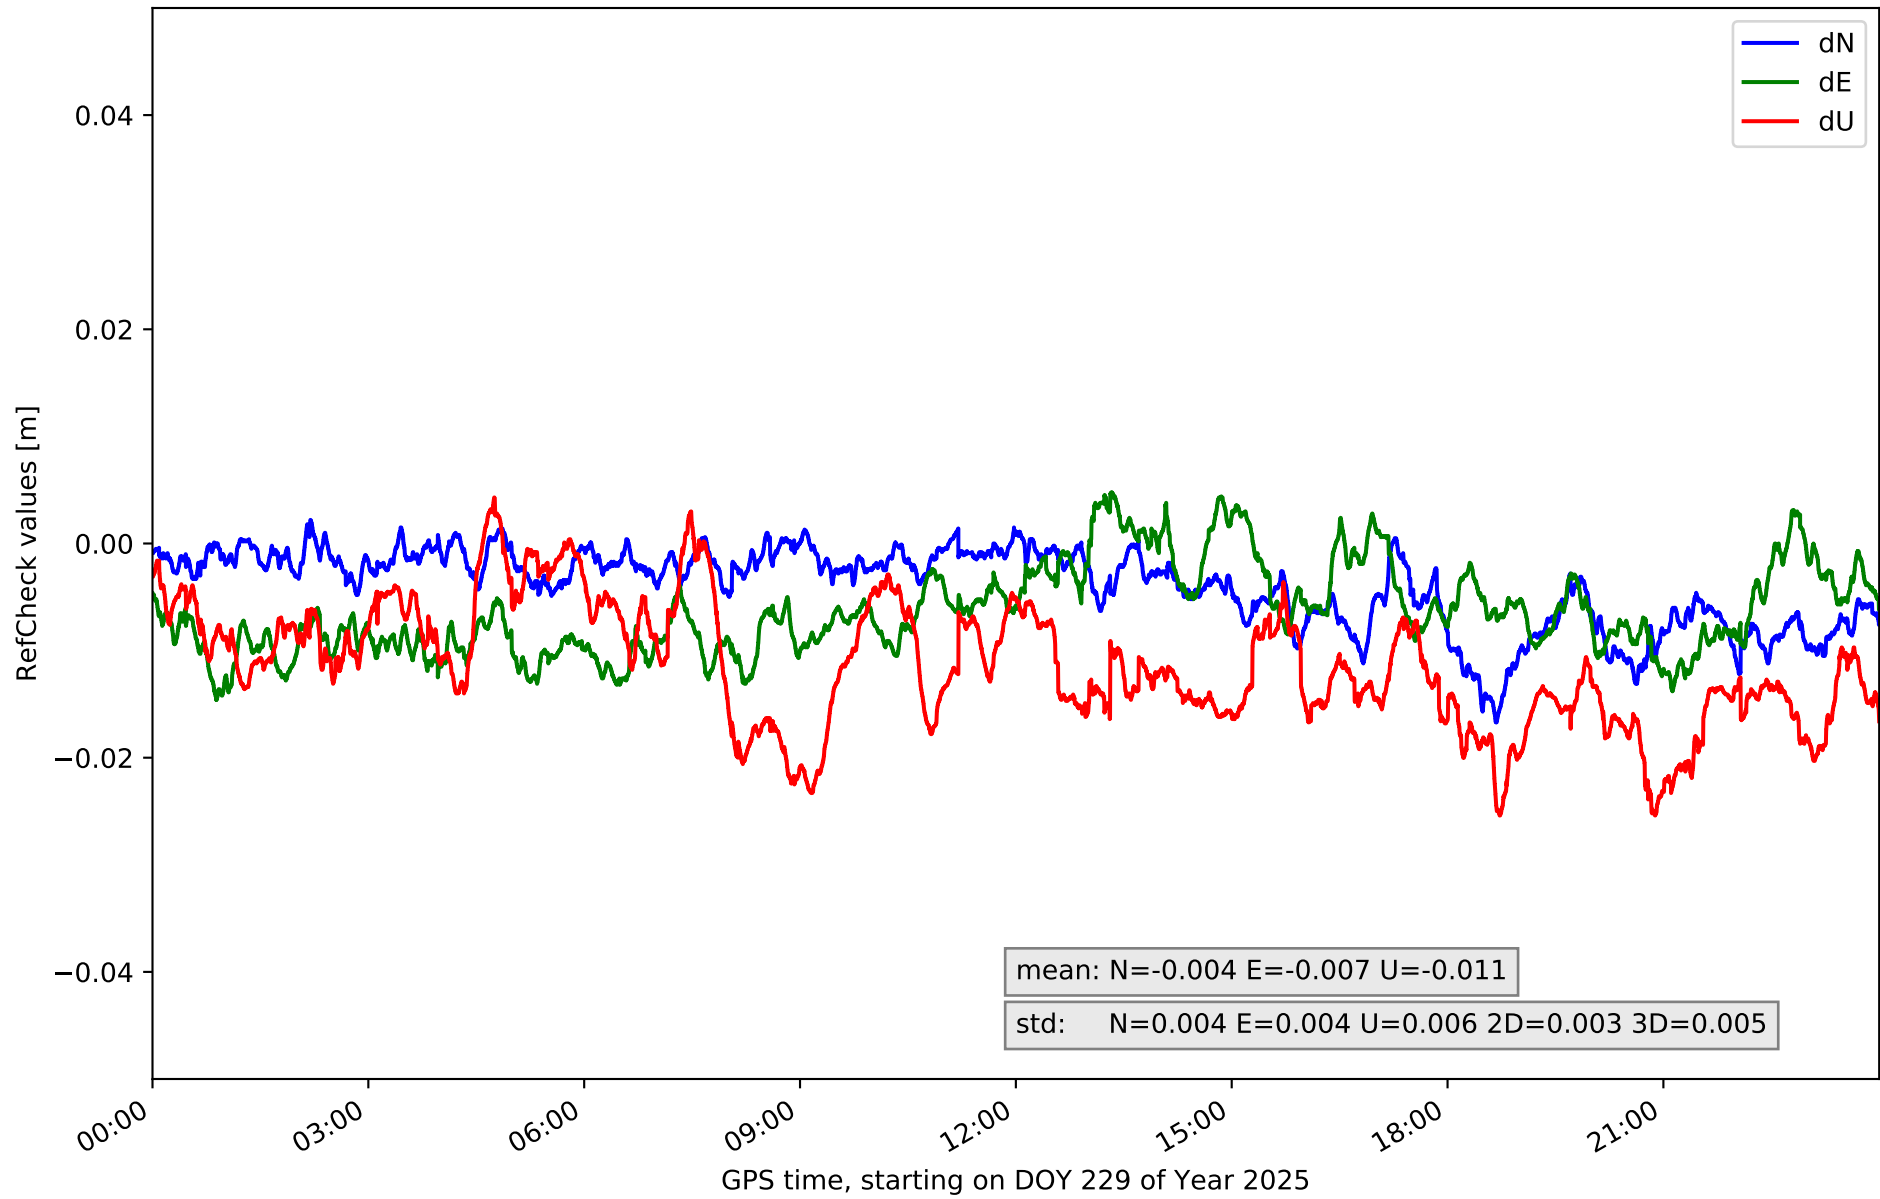


RefCheck for station TN02 in network N32T

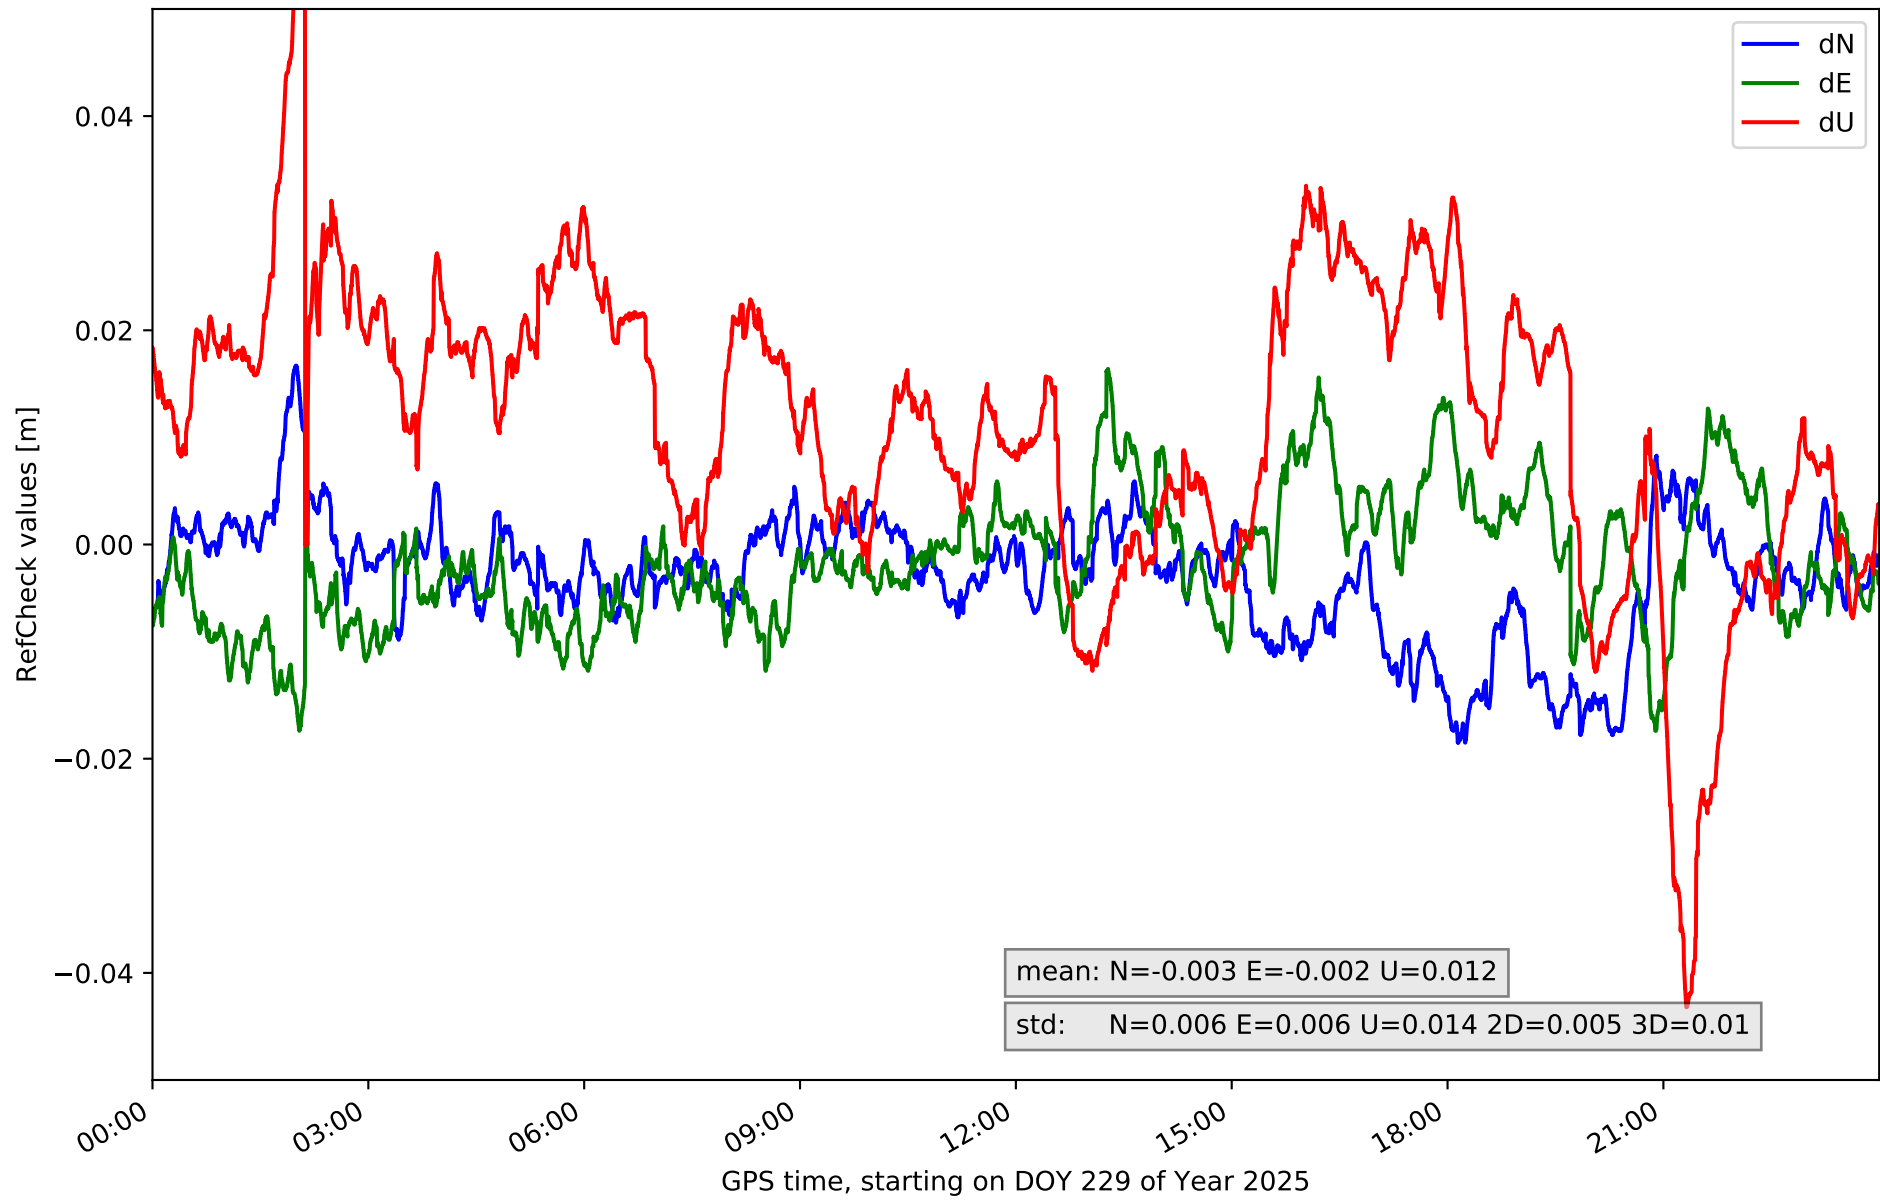


RefCheck for station TN03 in network N32T

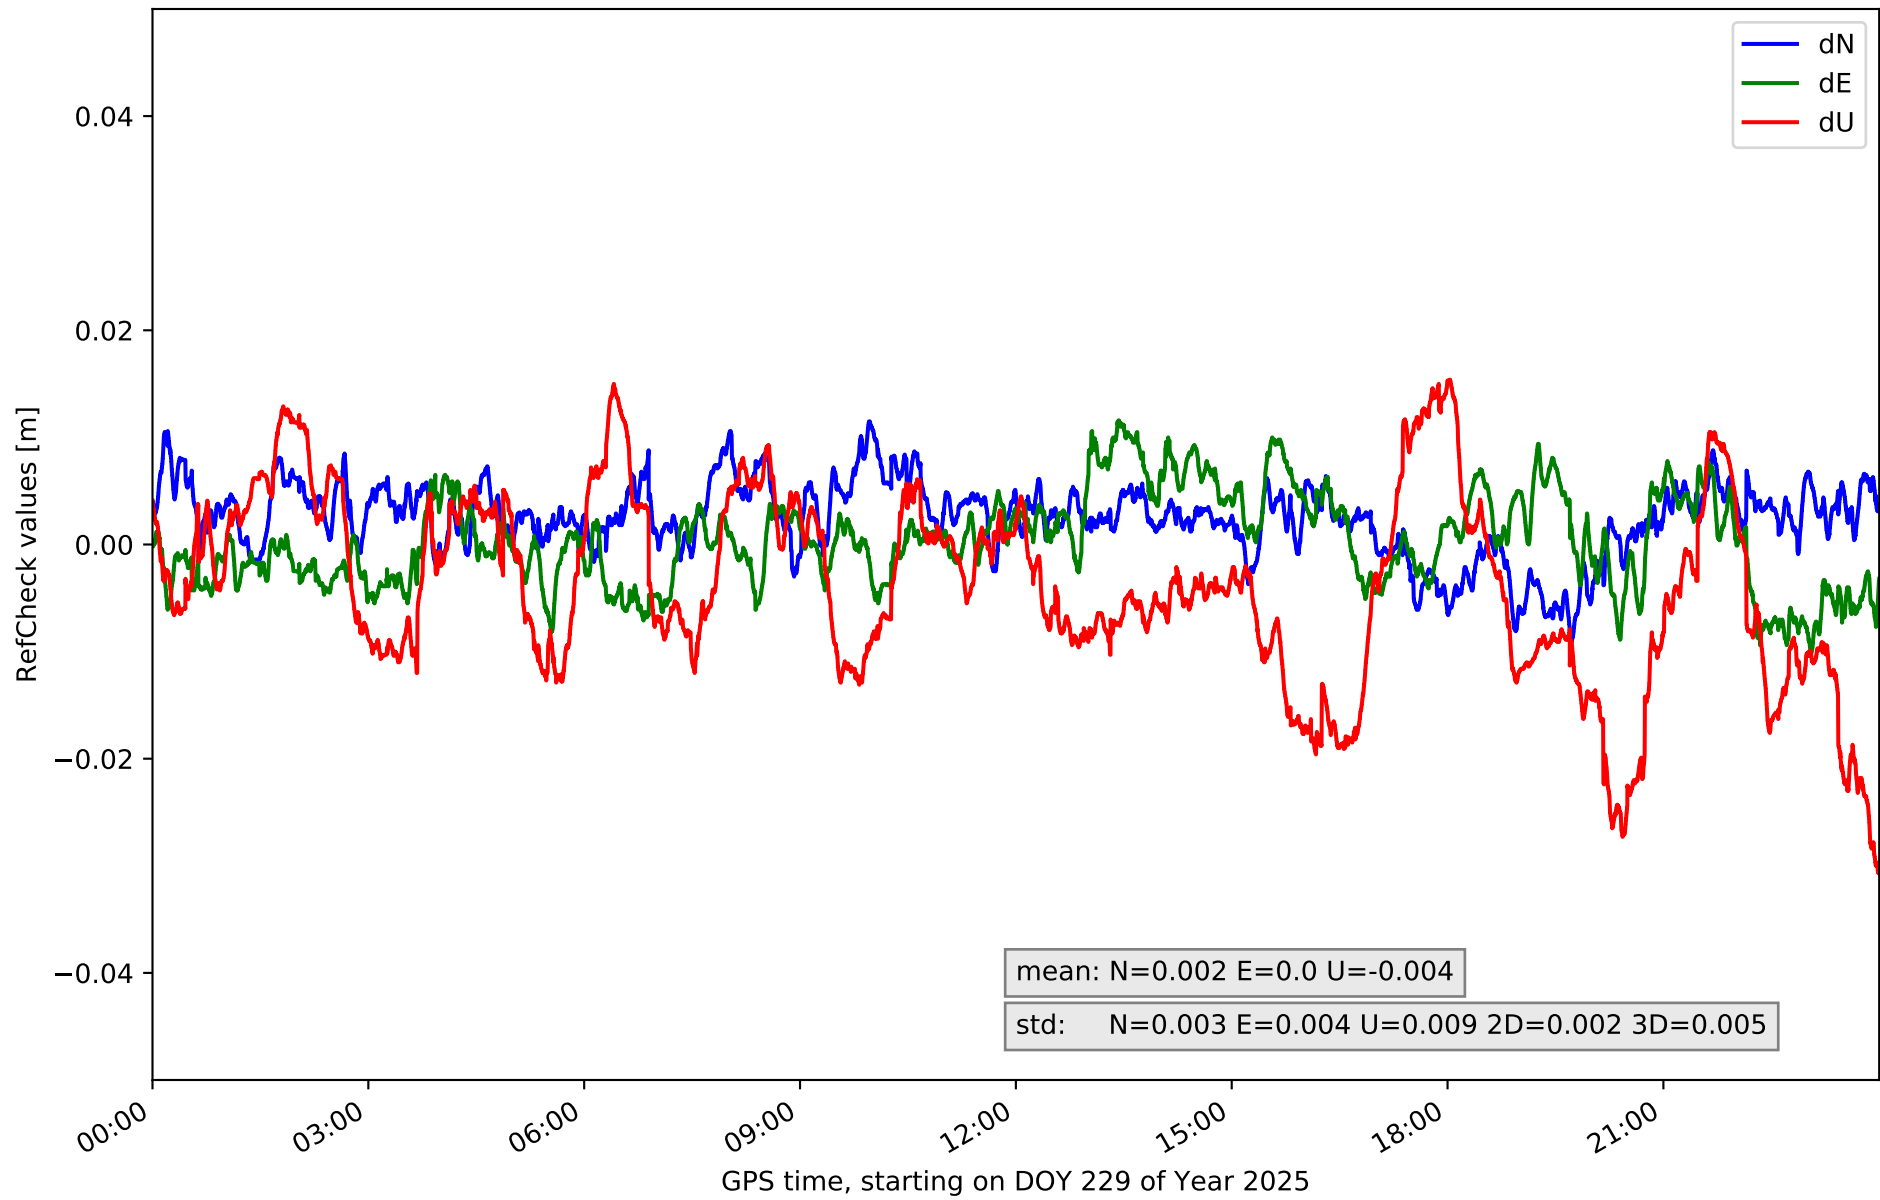


RefCheck for station TN04 in network N32T

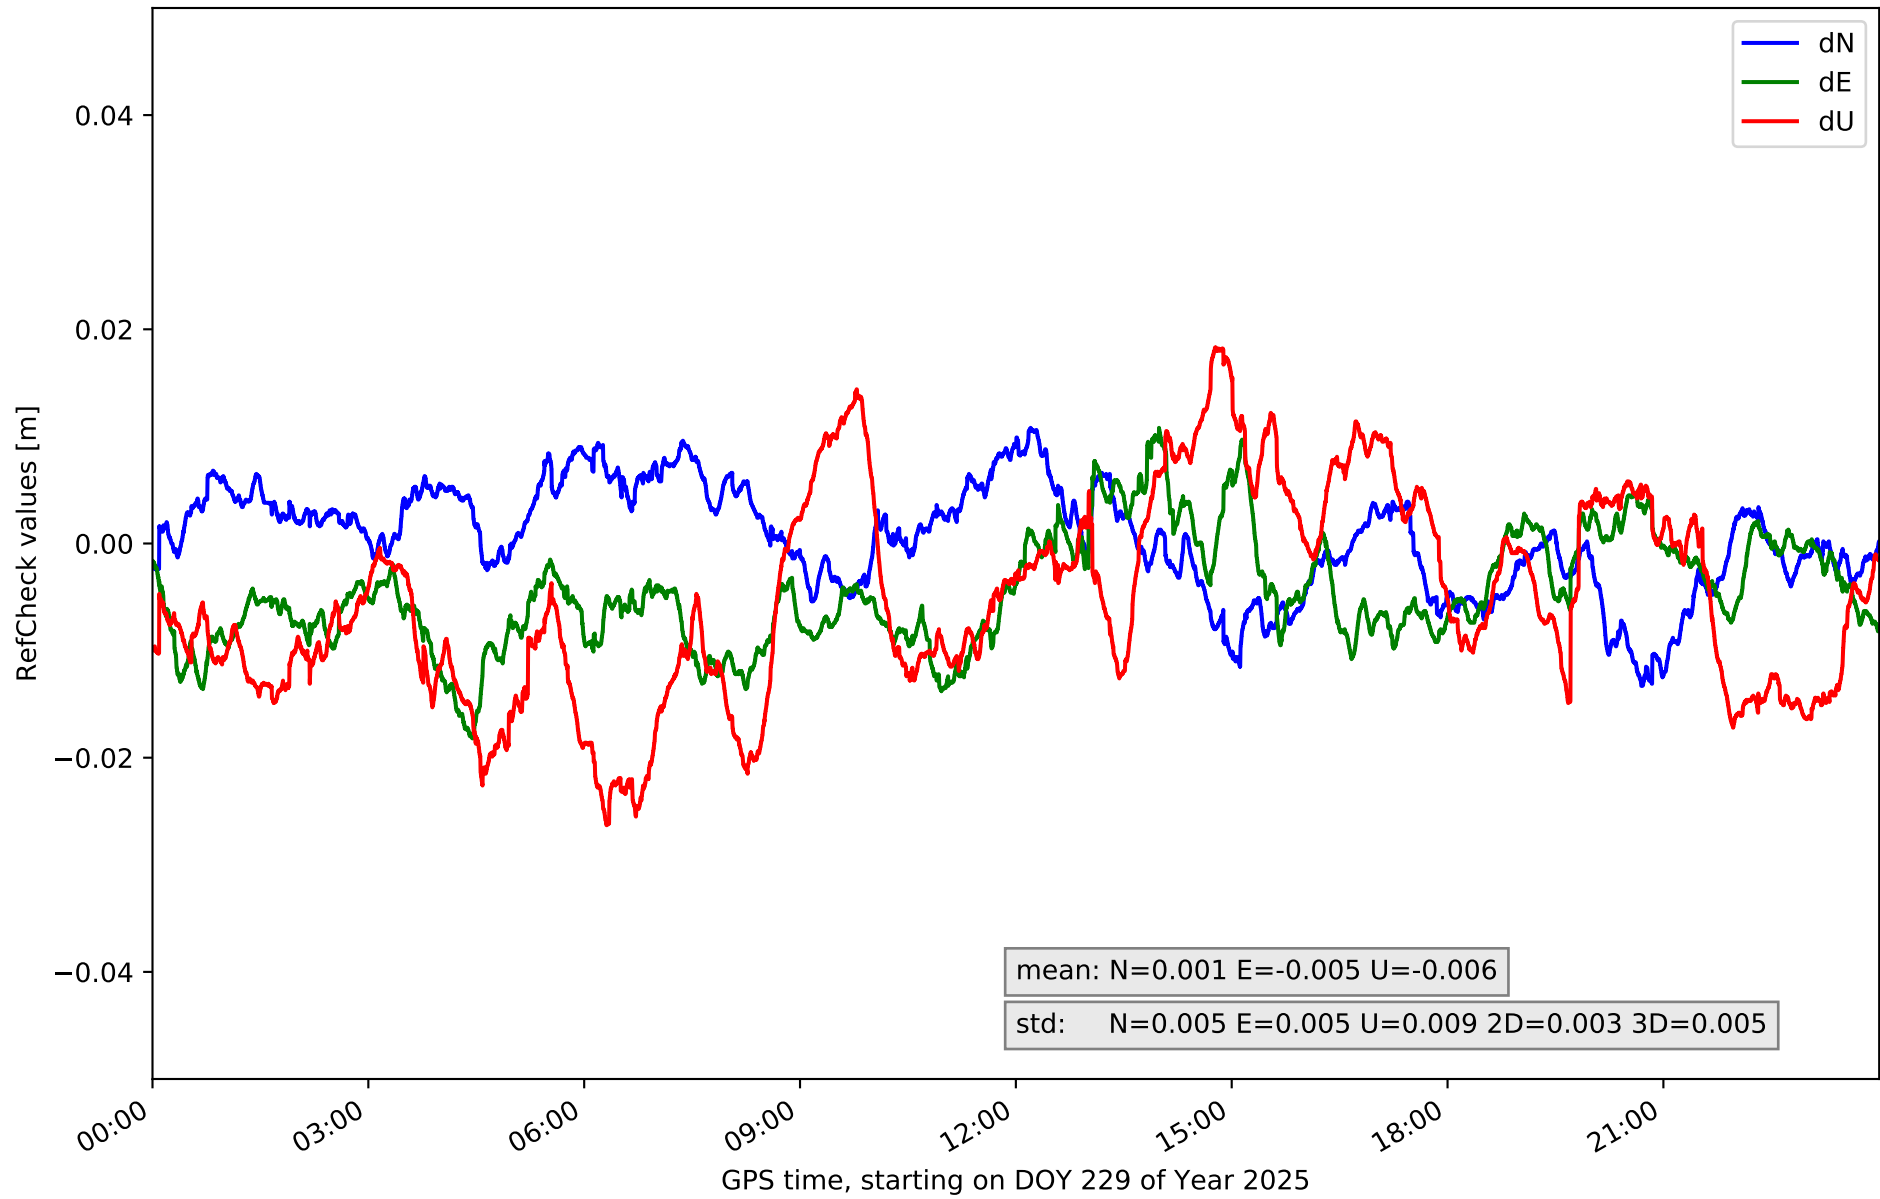


RefCheck for station TN06 in network N32T

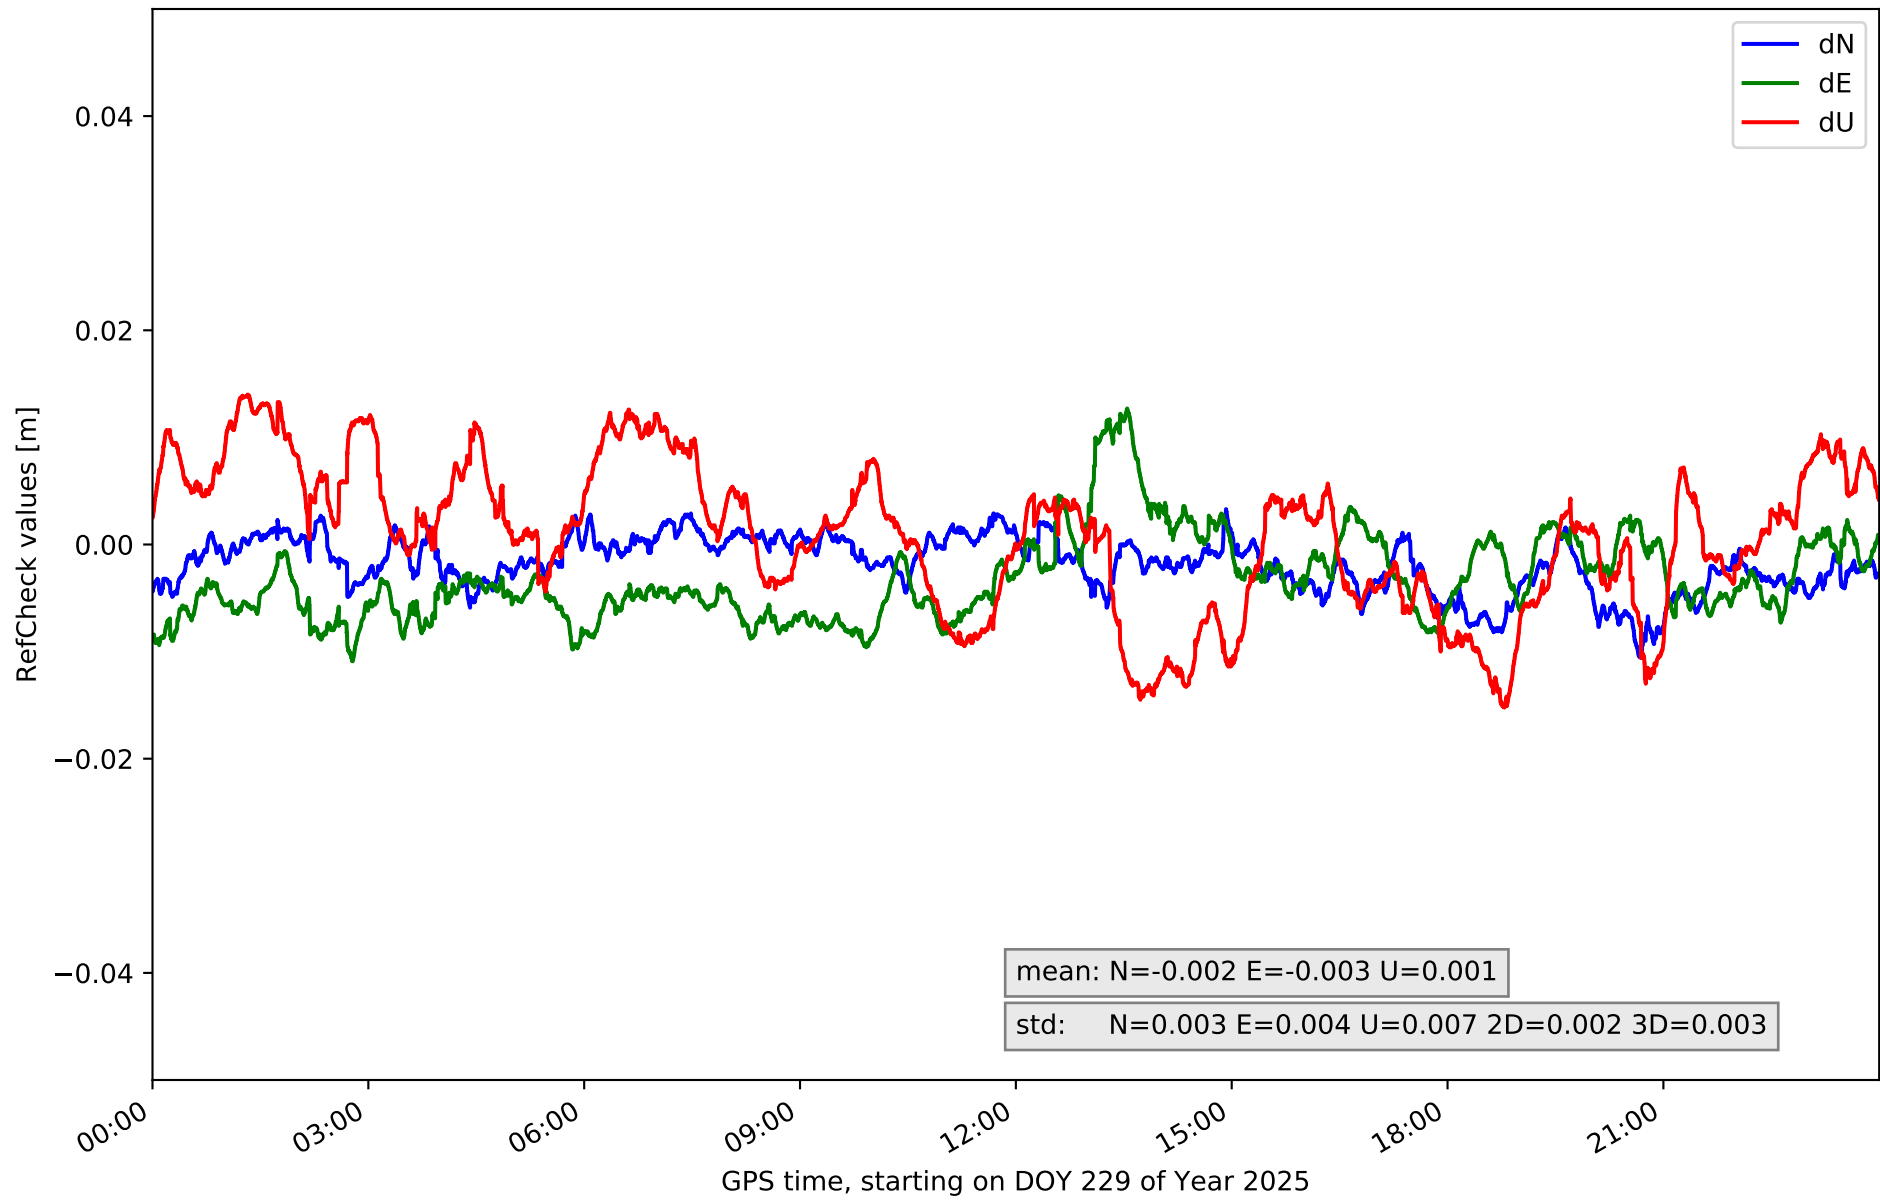

RefCheck for station TN09 in network N32T

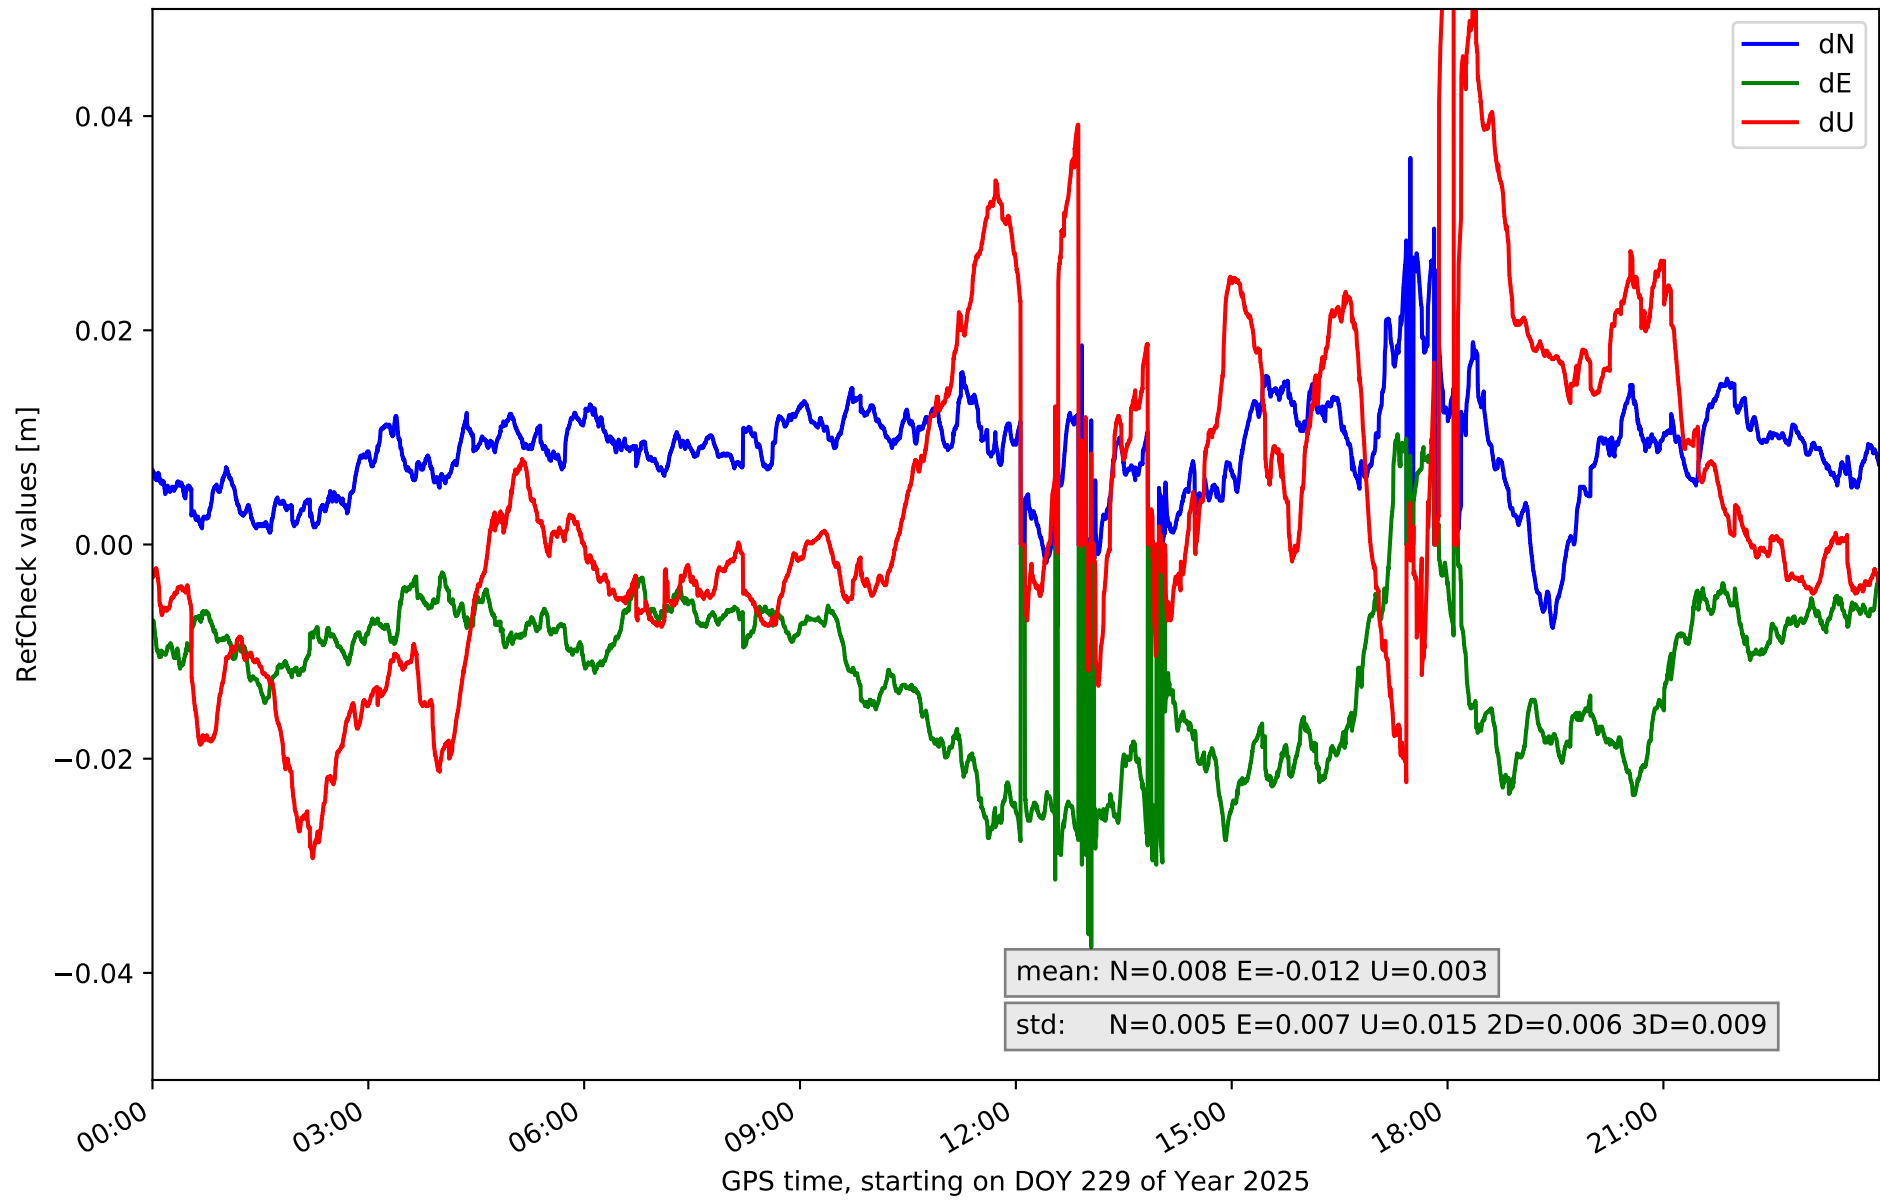

RefCheck for station TE11 in network N32T

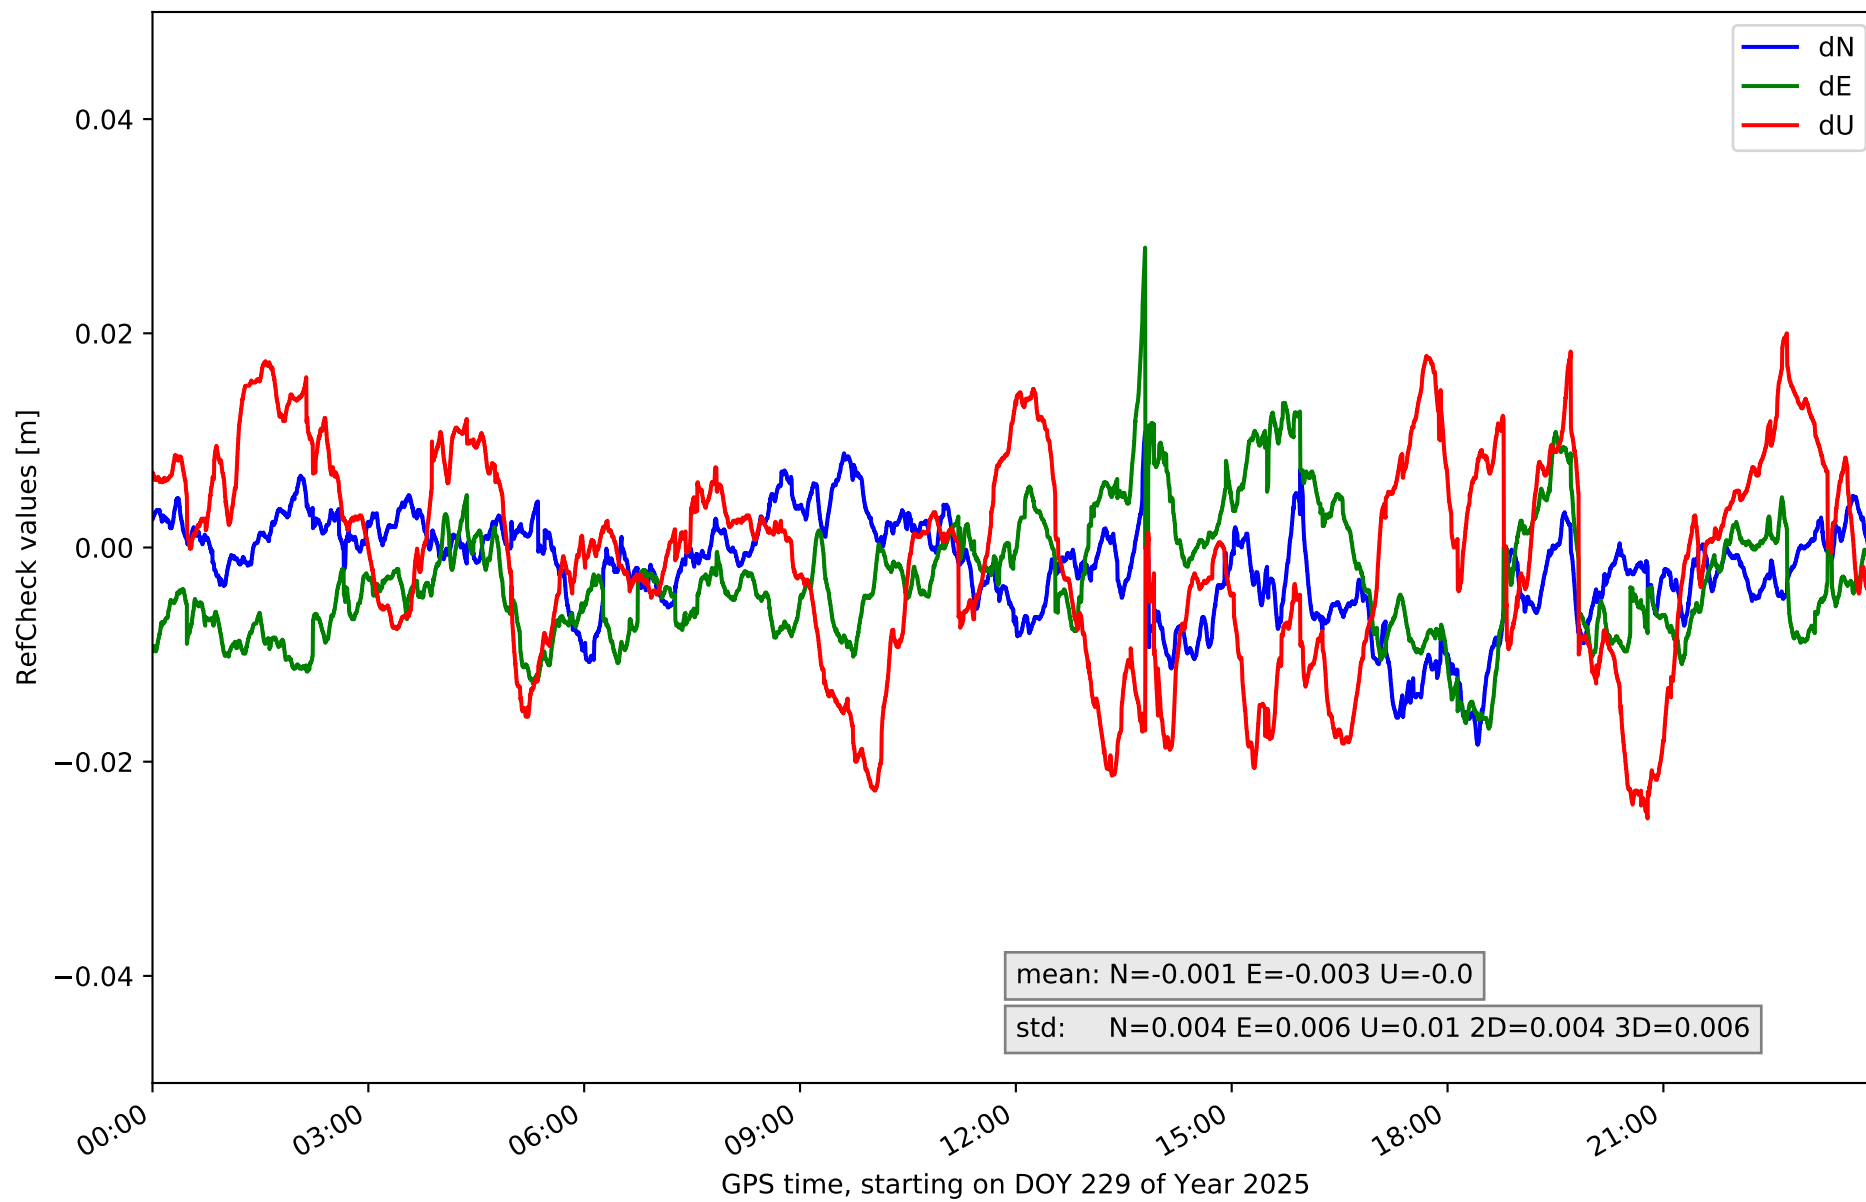

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.023	0.007	0.004	0.0	0.03	0.004	-0.014	0.02	0.008	0.004	0.004	58371	99.7	34496	58.9
EH02	-0.008	0.015	0.004	0.008	0.029	0.004	-0.003	0.041	0.008	0.004	0.007	57374	98.0	44693	76.3
GOM1	-0.019	0.009	0.006	-0.029	0.011	0.007	-0.06	0.016	0.013	0.005	0.01	41257	70.5	34195	58.4
IZAN	-0.013	0.009	0.004	-0.015	0.023	0.007	-0.033	0.012	0.008	0.004	0.006	7677	13.1	7669	13.1
LP01	-0.017	-0.002	0.002	-0.0	0.022	0.004	-0.013	0.025	0.006	0.004	0.004	48542	82.9	5638	9.6
LP03	-0.011	0.005	0.003	-0.007	0.017	0.005	-0.017	0.021	0.008	0.004	0.004	14733	25.2	780	1.3
LPAL	-0.019	0.0	0.003	-0.001	0.024	0.004	-0.017	0.009	0.005	0.004	0.004	55763	95.2	13760	23.5
LRES	-0.004	0.015	0.003	-0.0	0.03	0.005	-0.017	0.021	0.008	0.004	0.004	57115	97.6	24143	41.2
TN01	-0.017	0.002	0.004	-0.015	0.005	0.004	-0.025	0.004	0.006	0.003	0.005	22254	38.0	9505	16.2
TN02	-0.018	0.017	0.006	-0.017	0.016	0.006	-0.043	0.06	0.014	0.005	0.01	14893	25.4	24138	41.2
TN03	-0.009	0.011	0.003	-0.01	0.012	0.004	-0.031	0.015	0.009	0.002	0.005	2387	4.1	3354	5.7
TN04	-0.013	0.011	0.005	-0.018	0.011	0.005	-0.026	0.018	0.009	0.003	0.005	14203	24.3	6180	10.6
TN06	-0.011	0.003	0.003	-0.011	0.013	0.004	-0.015	0.014	0.007	0.002	0.003	1664	2.8	0	0.0
TN09	-0.008	0.036	0.005	-0.038	0.01	0.007	-0.029	0.061	0.015	0.006	0.009	49551	84.6	24728	42.2
TE11	-0.018	0.011	0.004	-0.017	0.028	0.006	-0.025	0.02	0.01	0.004	0.006	11253	19.2	5131	8.8
Mean	-0.014	0.01	0.004	-0.011	0.019	0.005	-0.025	0.024	0.009	0.004	0.006	30469.1	52.0	15894.0	27.1
Min/Max	-0.023	0.036	0.006	-0.038	0.03	0.007	-0.06	0.061	0.015	0.006	0.01	58371	99.7	44693	76.3

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	93.6	93.8	94.3	95.2	91.4
considering satellites with dual-frequency fixed	91.8	91.4	91.6	93.5	90.3
considering all signals separately	91.8	91.3	91.6	93.8	89.1