

summary for network N32T

timeperiod chosen: from 2025-08-18-00:00:00 until 2025-08-18-23:59:58

average update rate (durations larger than 15 seconds considered as observation gap): 1.4 seconds


average fixing percentage with threshold set to 0.3: 92.8 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

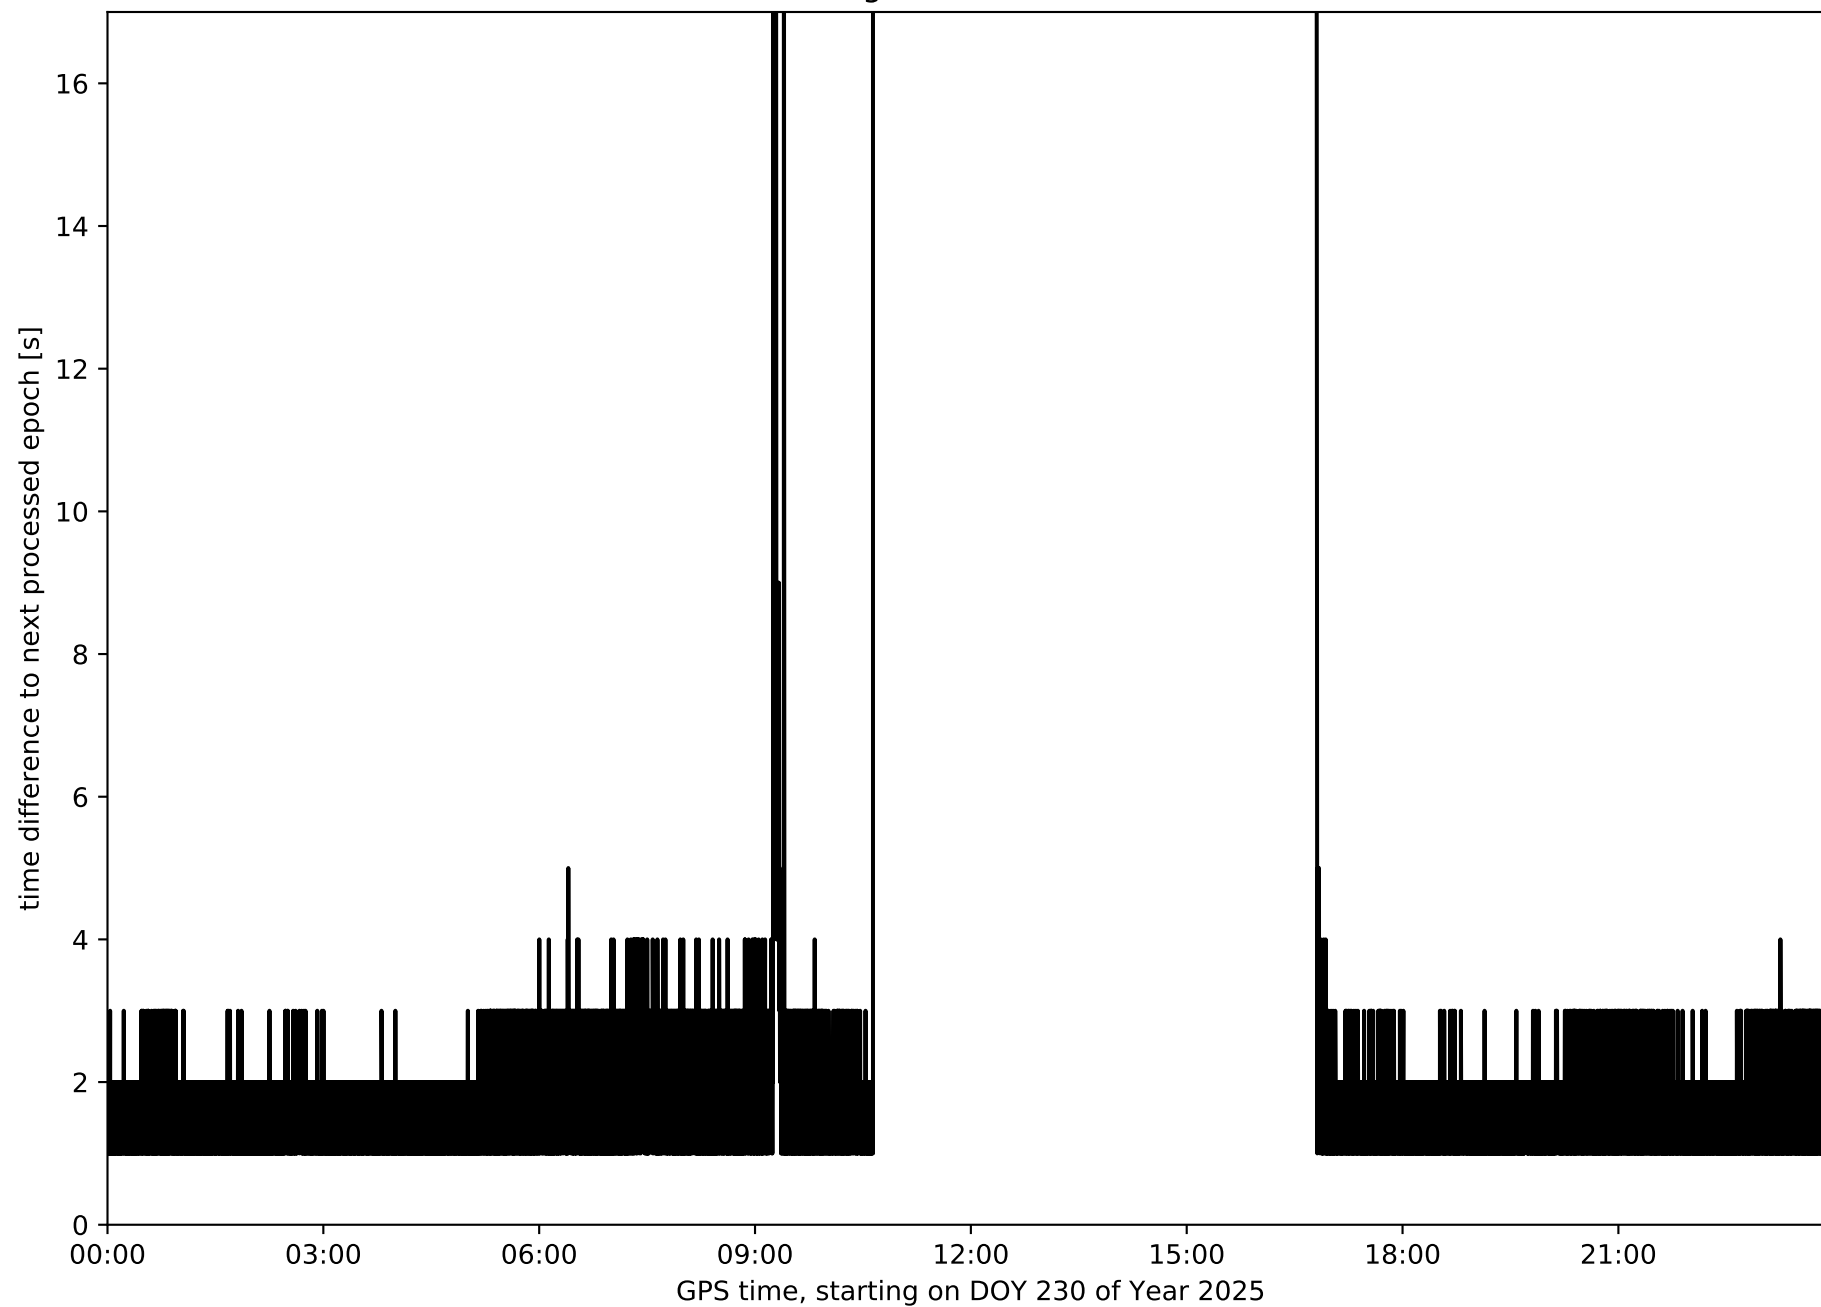


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

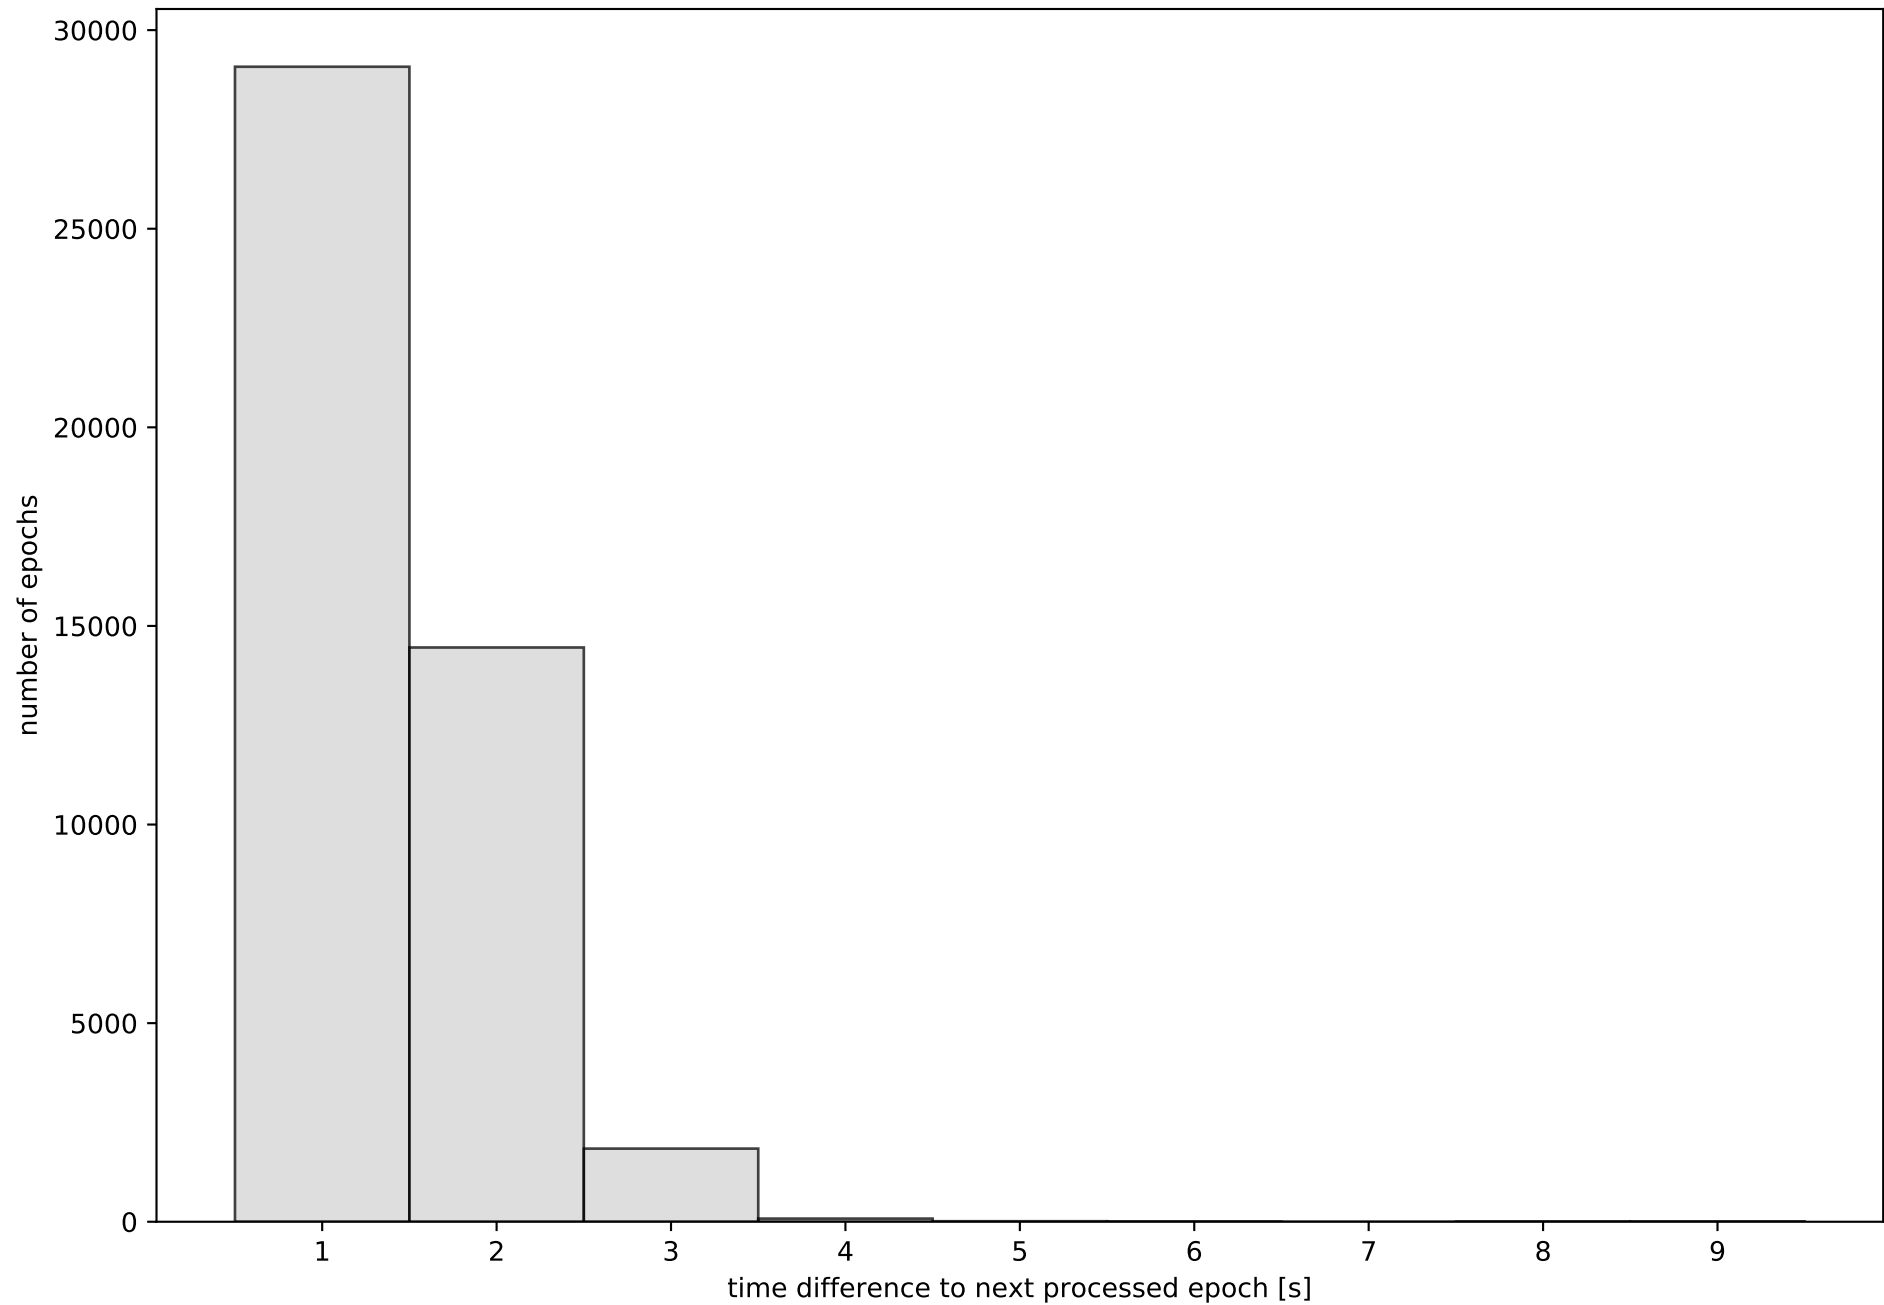


Network N32T with threshold set to 0.3

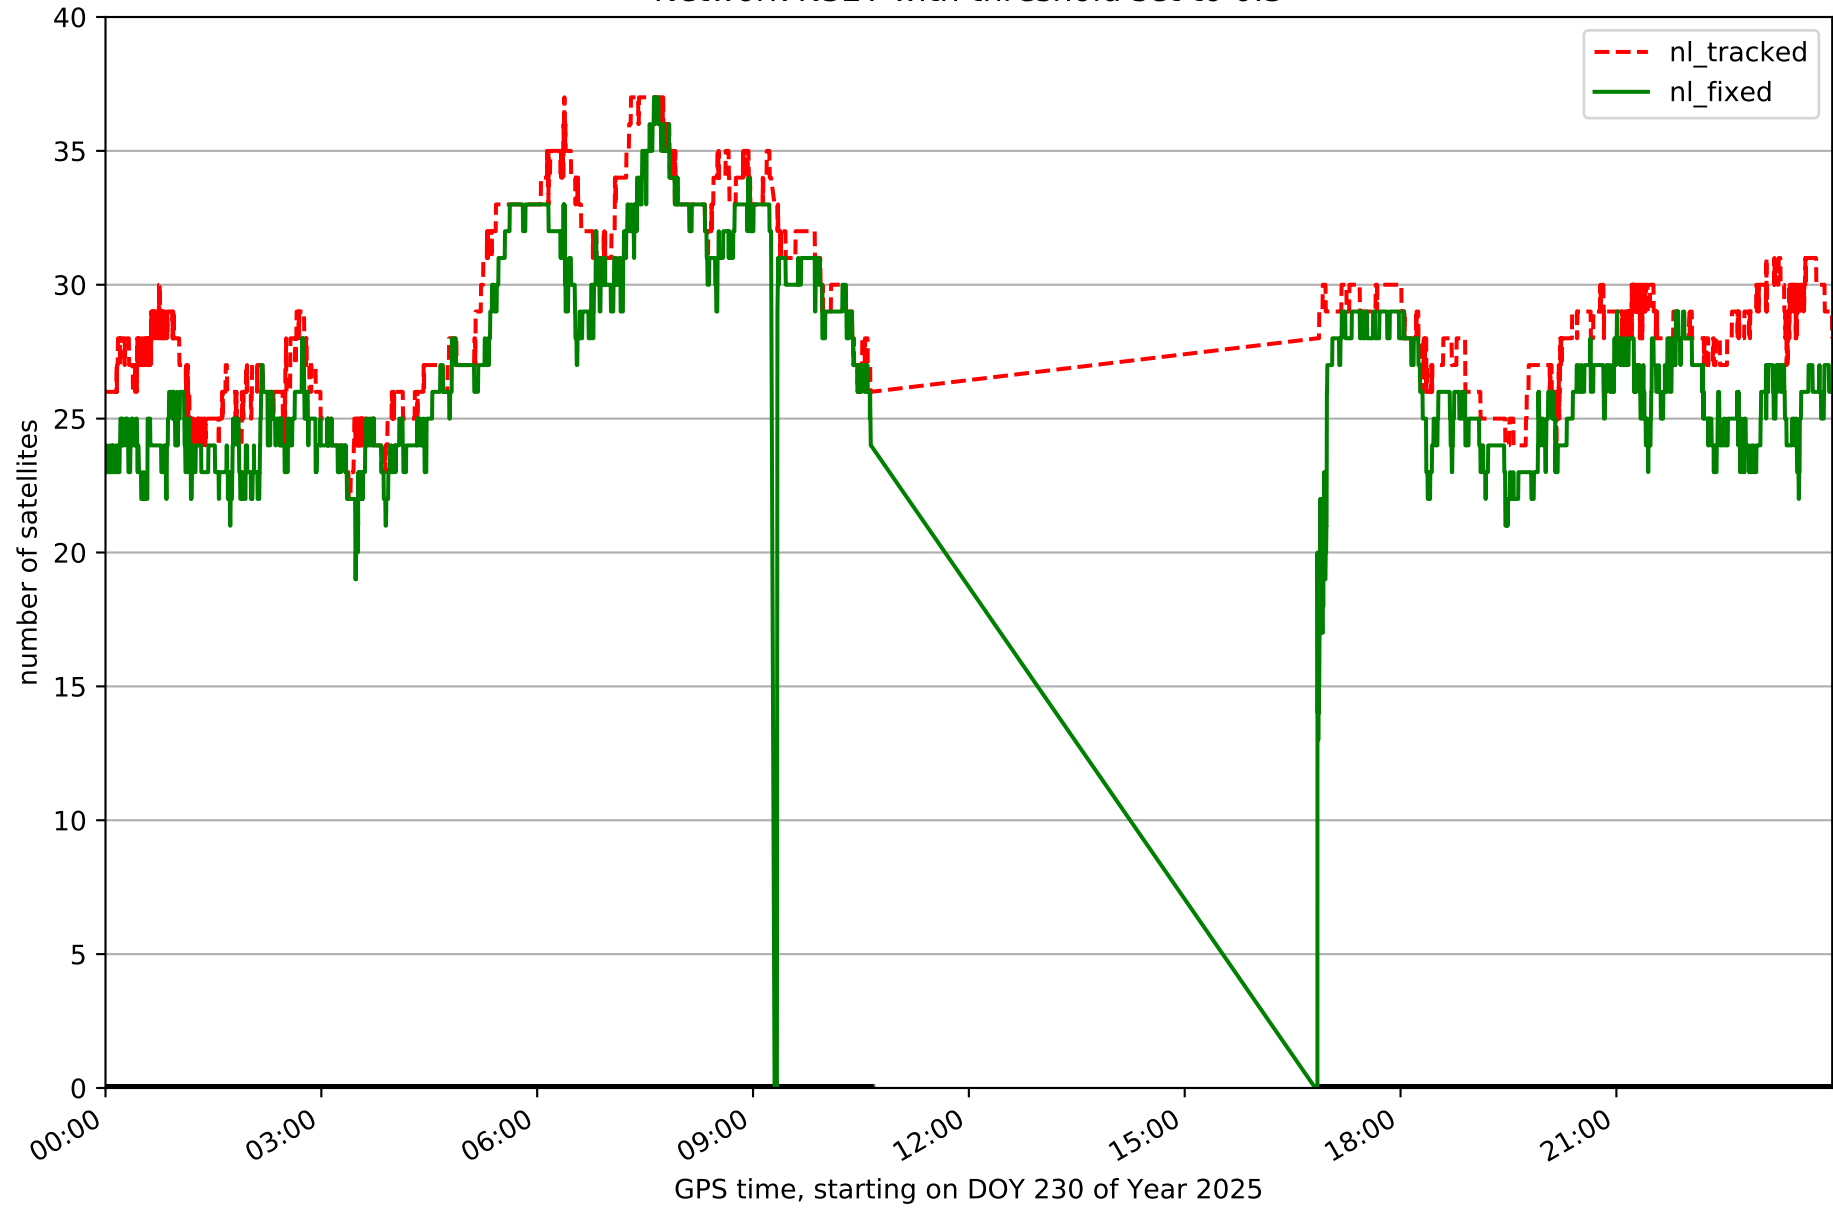


Fixing percentage of satellites in network N32T with threshold set to 0.3

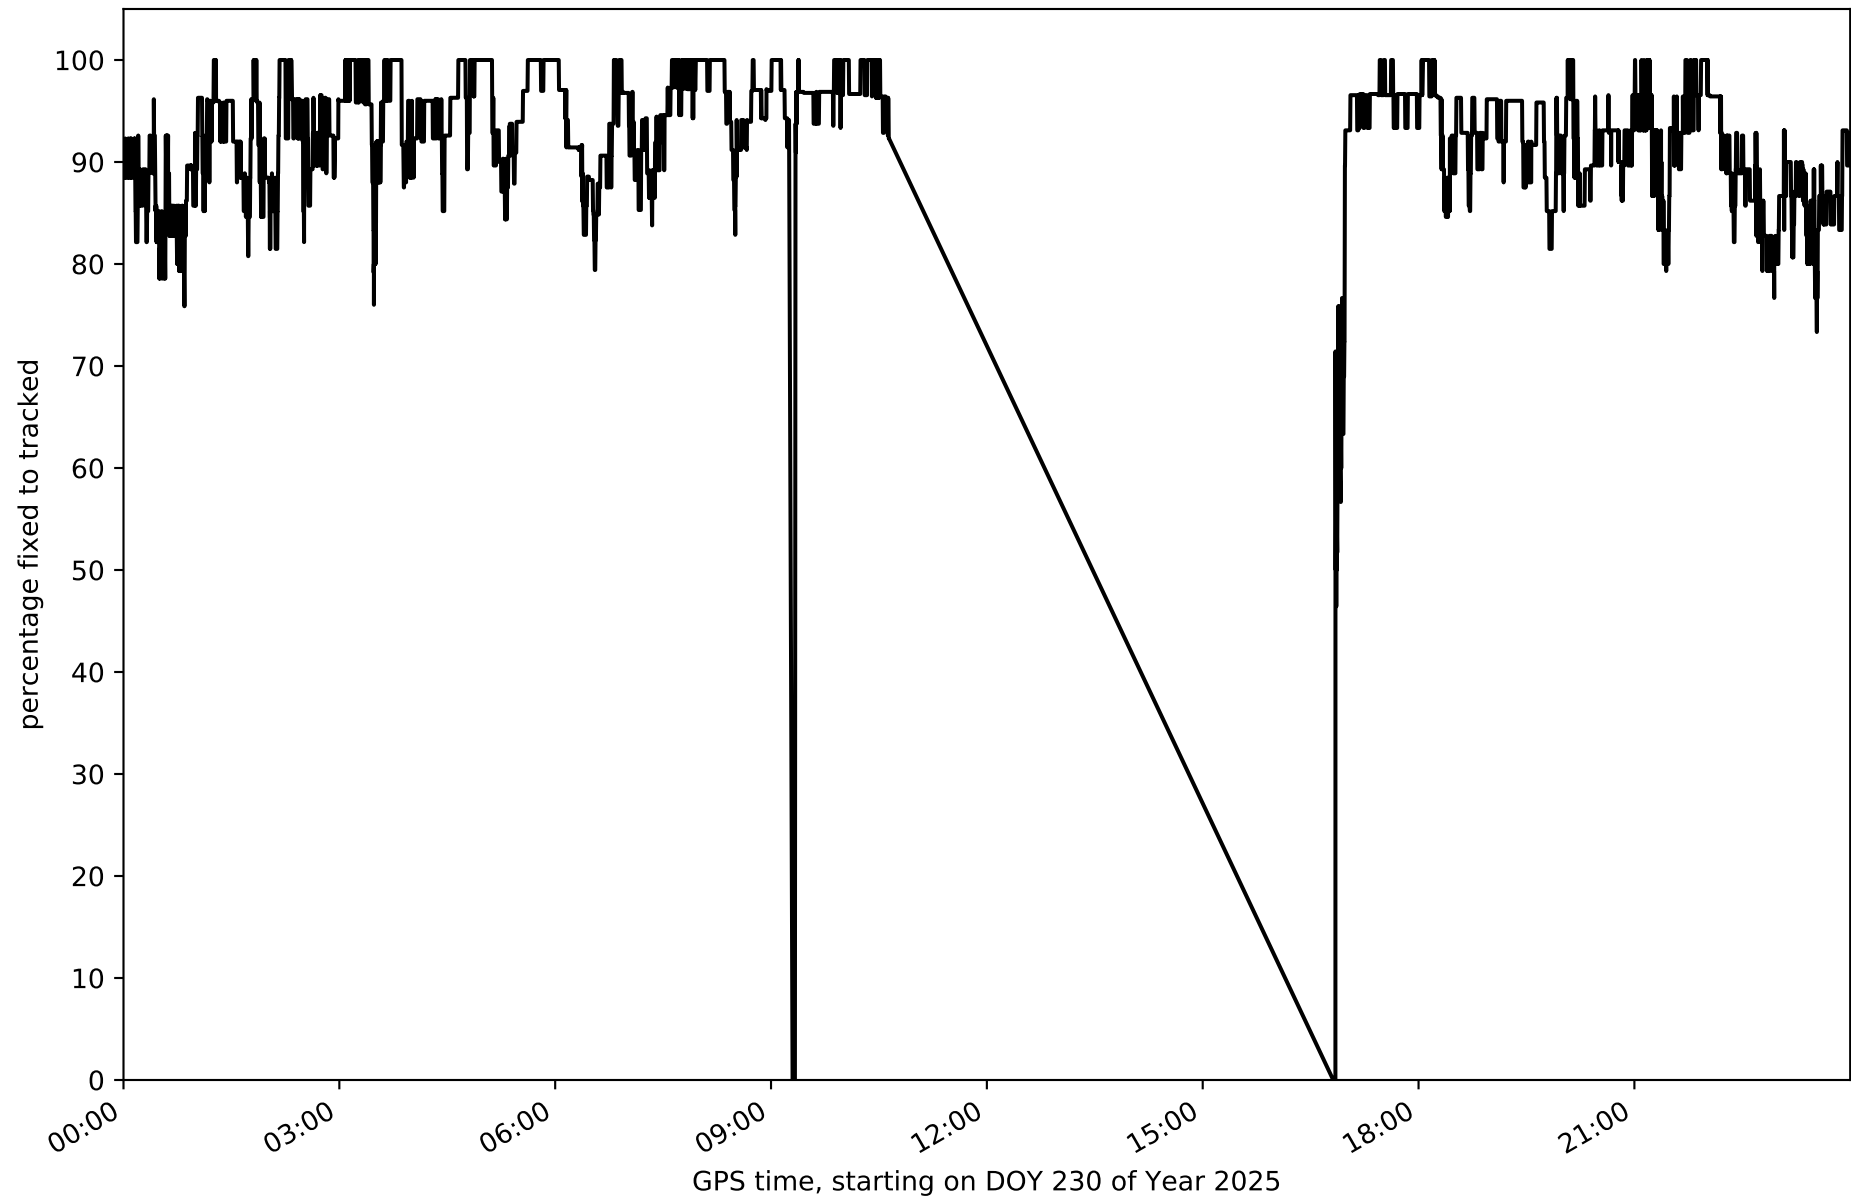


Network N32T - only GPS with threshold set to 0.3

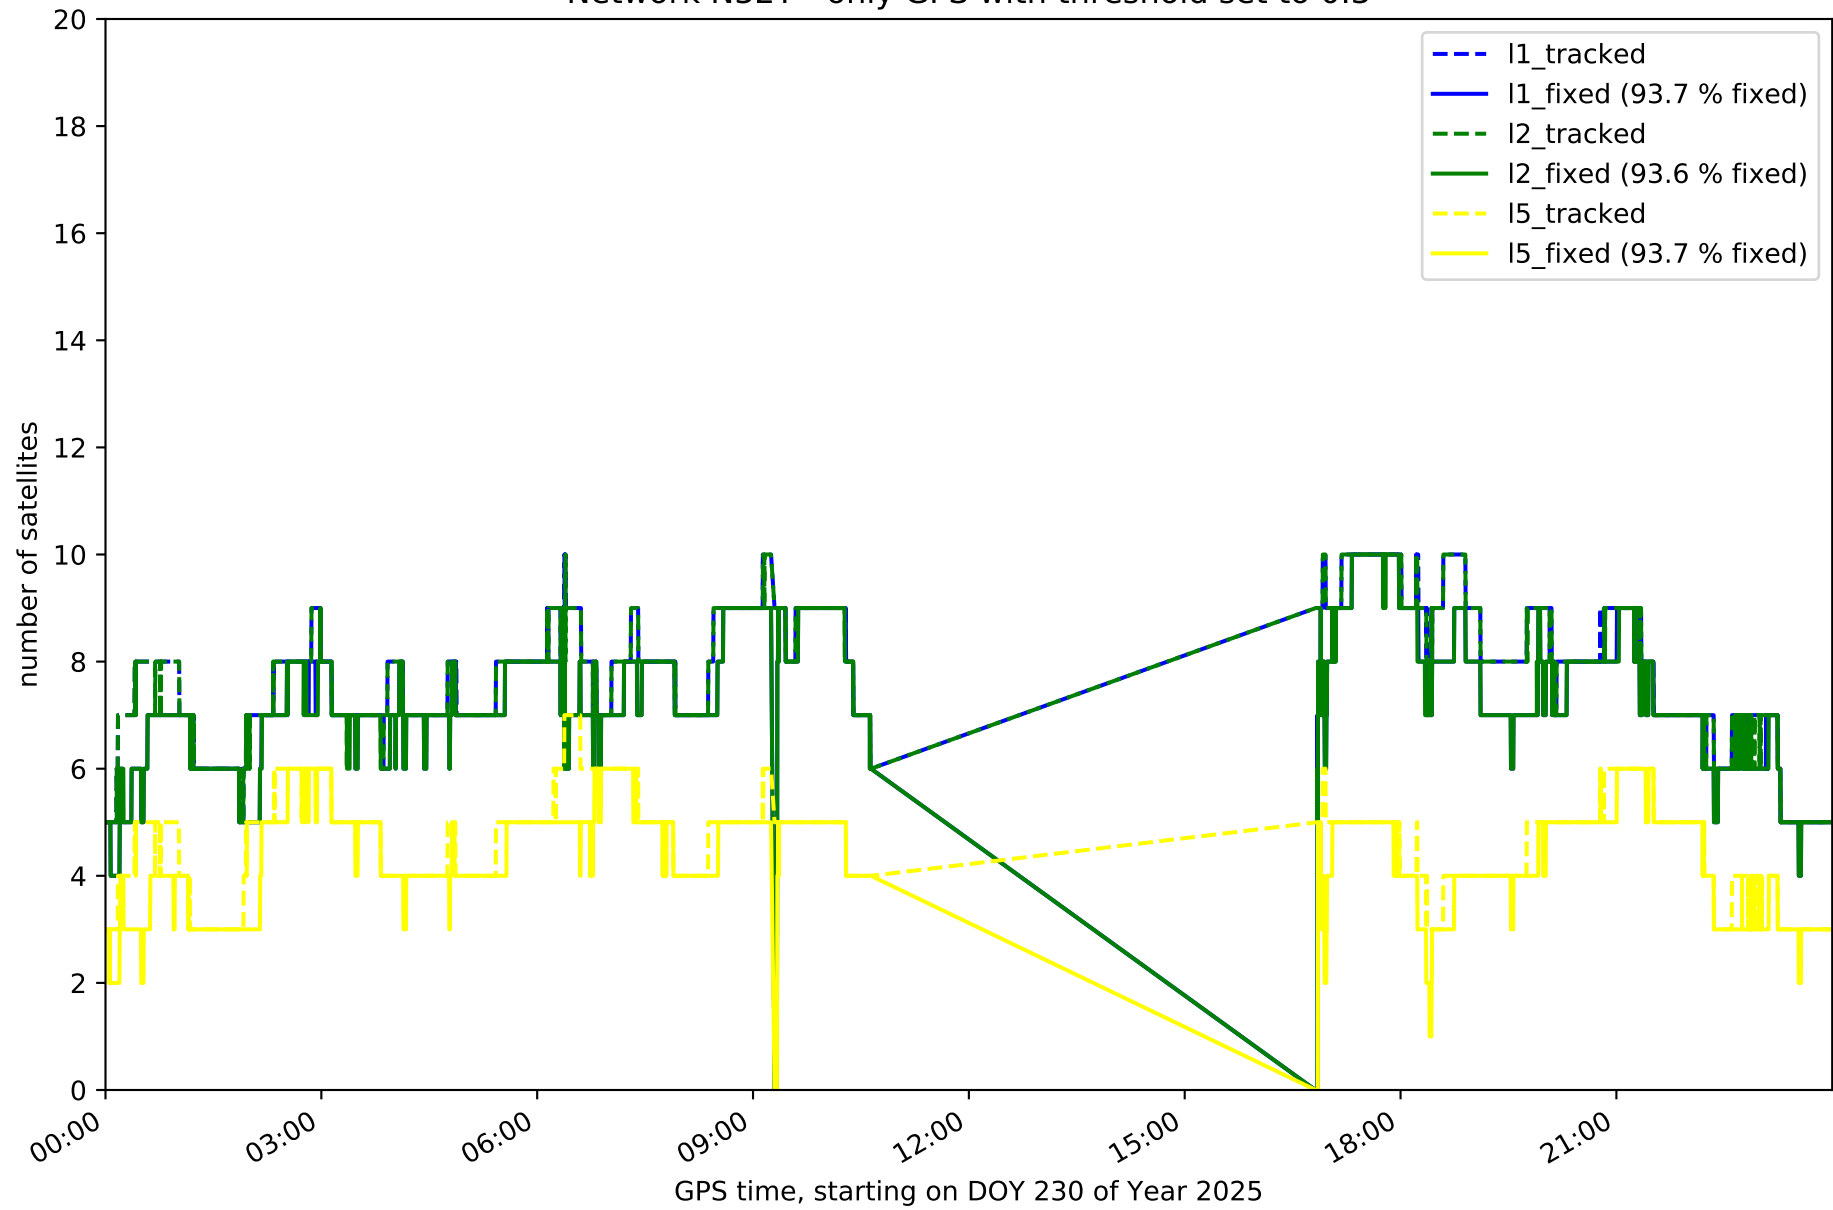


Network N32T - only GLONASS with threshold set to 0.3

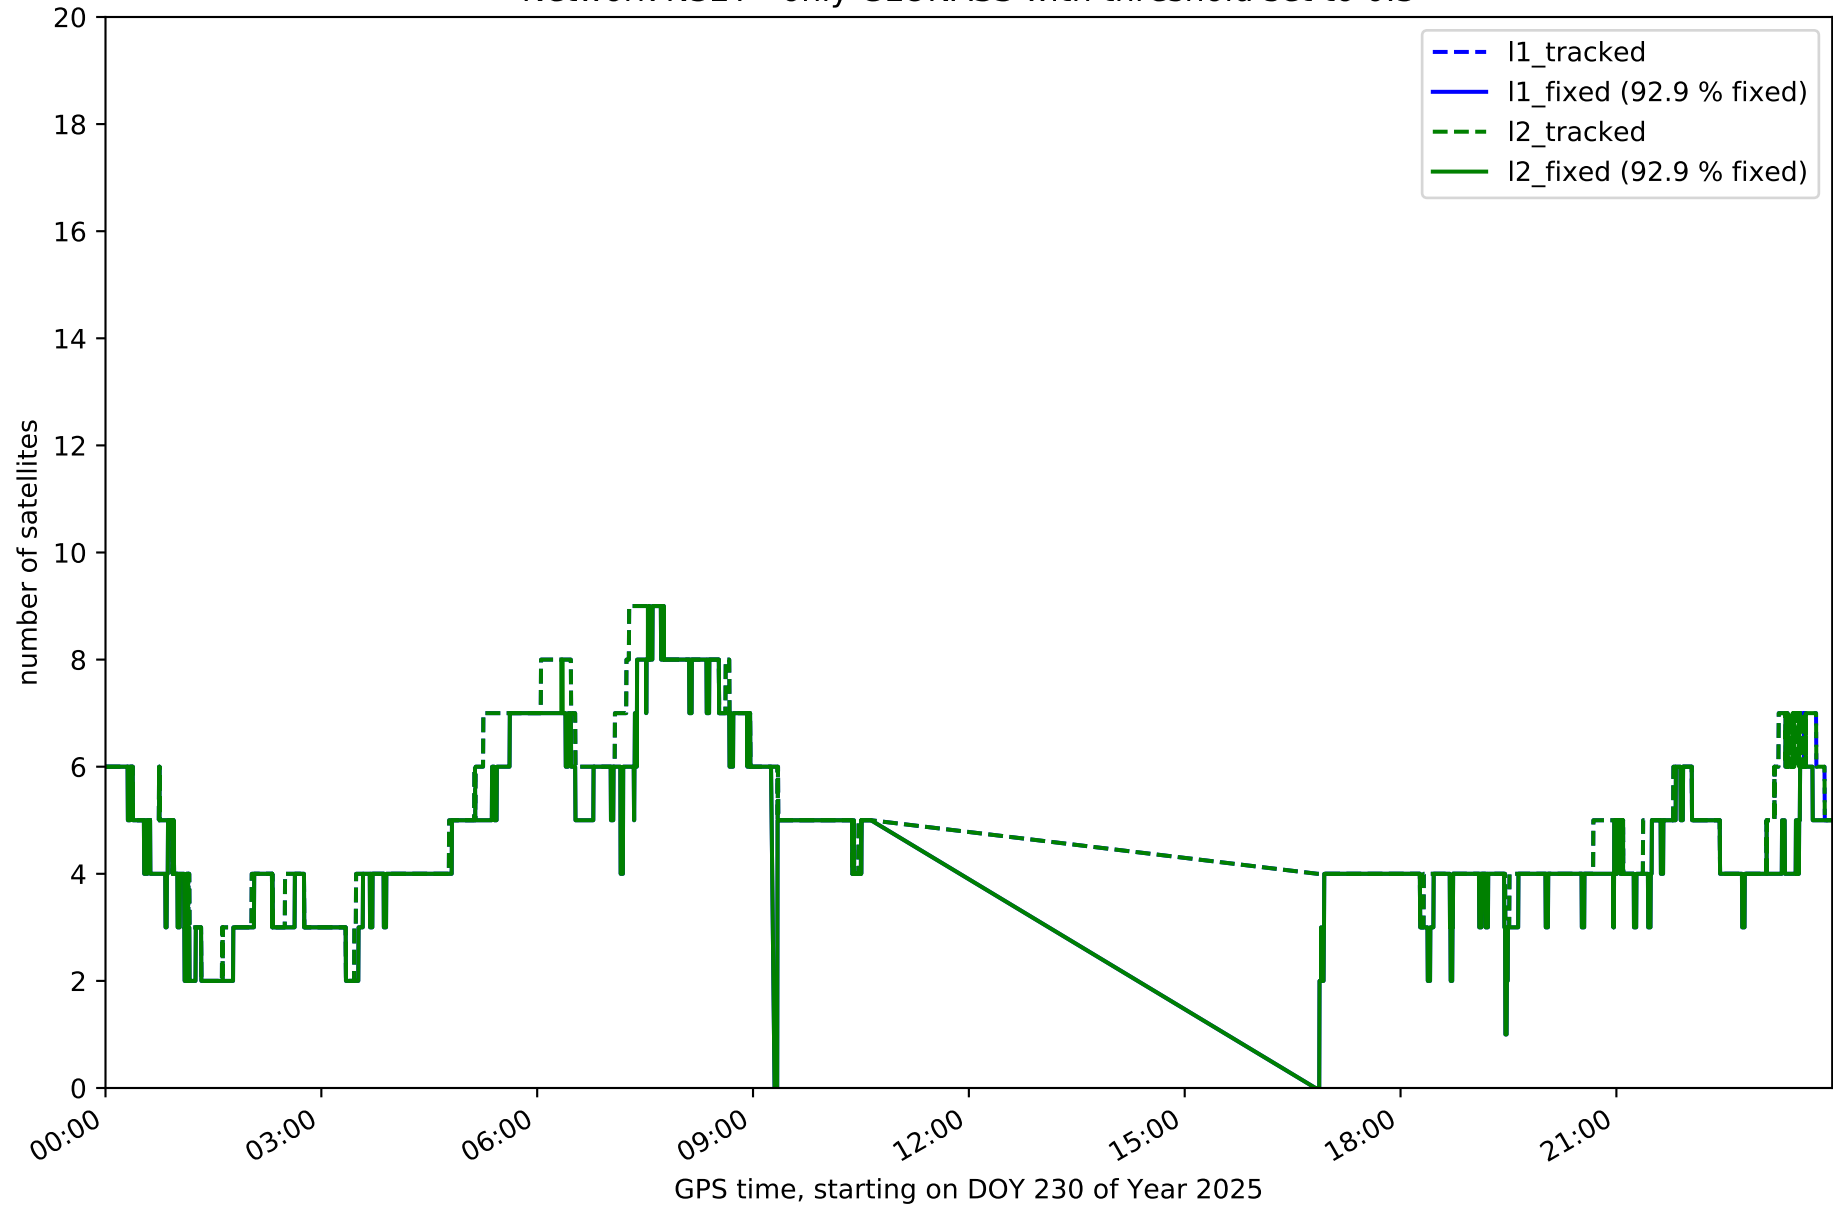


Network N32T - only BDS with threshold set to 0.3

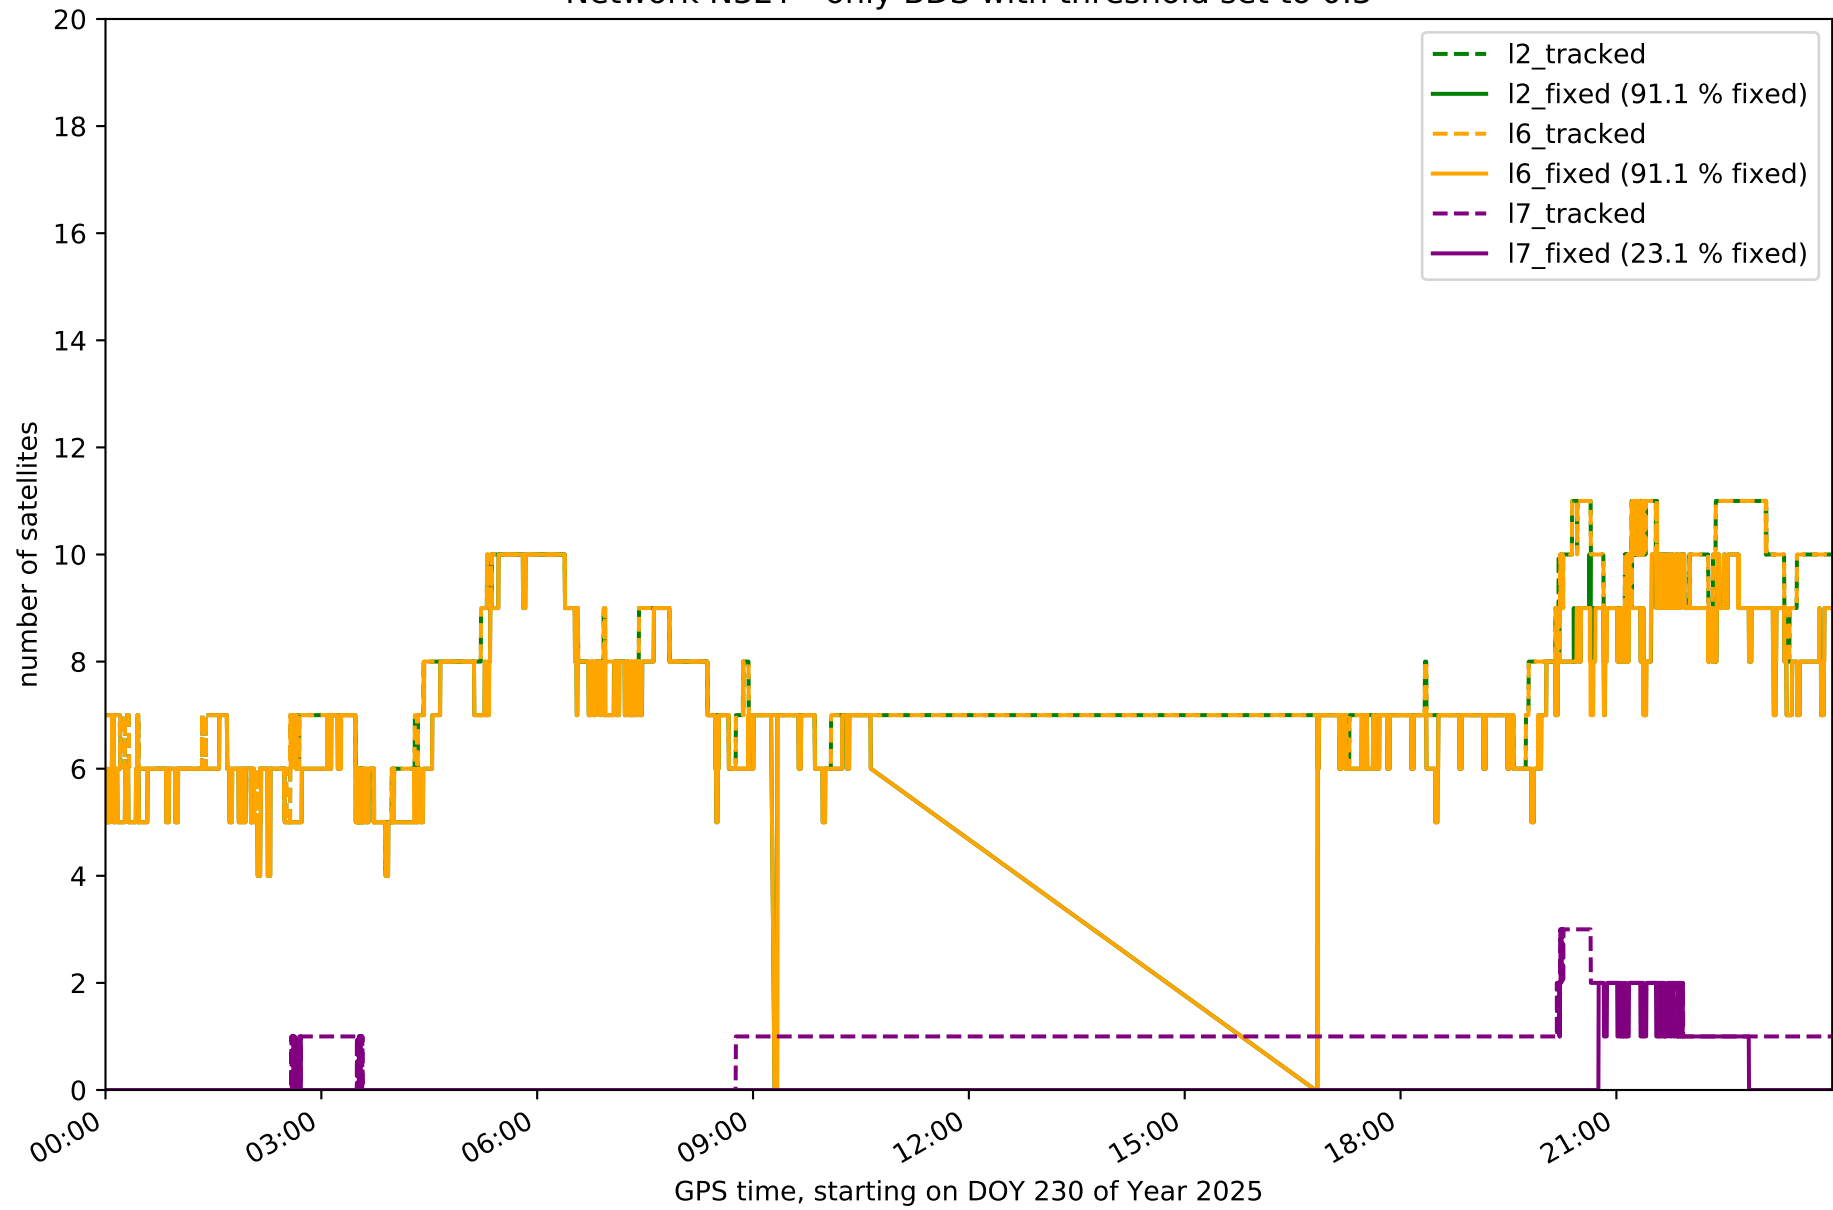


Network N32T - only Galileo with threshold set to 0.3

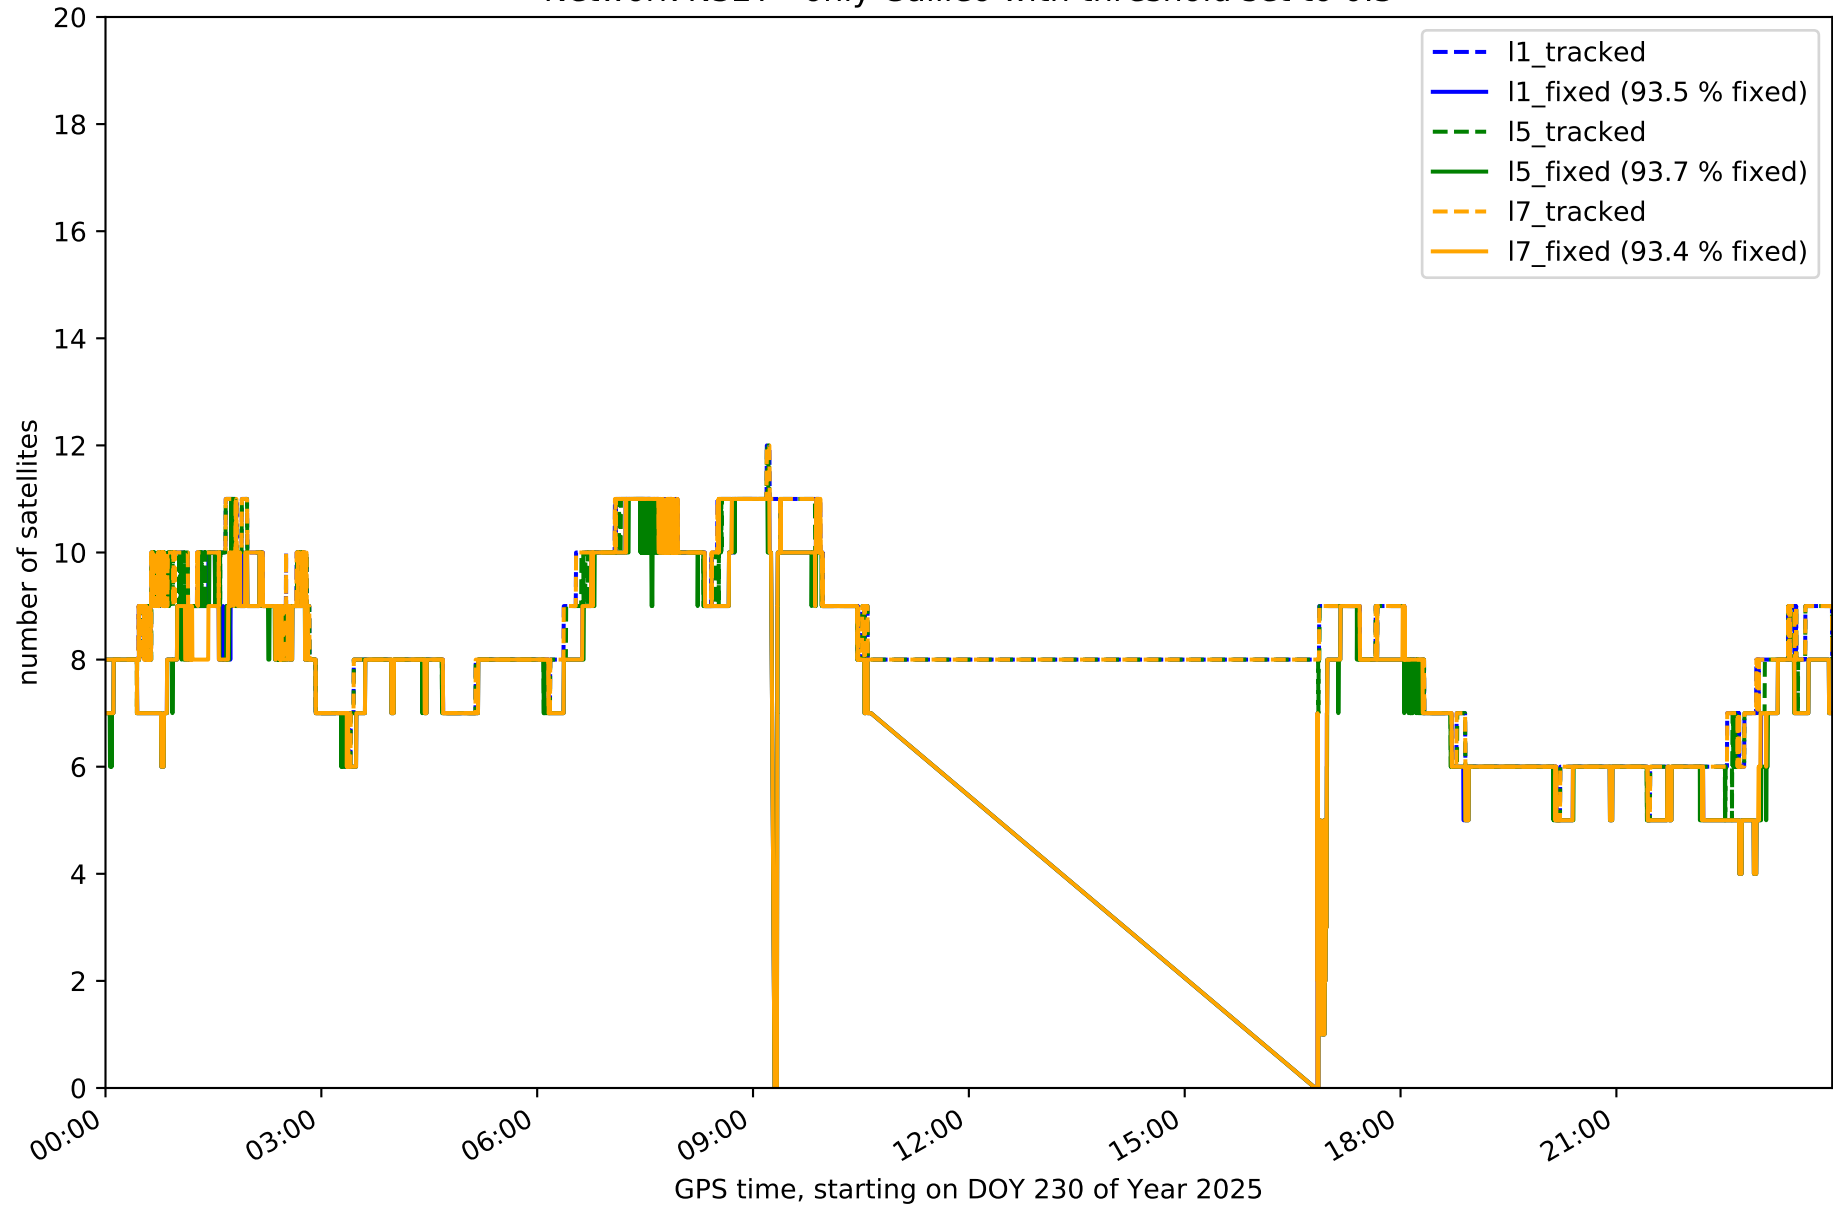


Station EH01 in network N32T

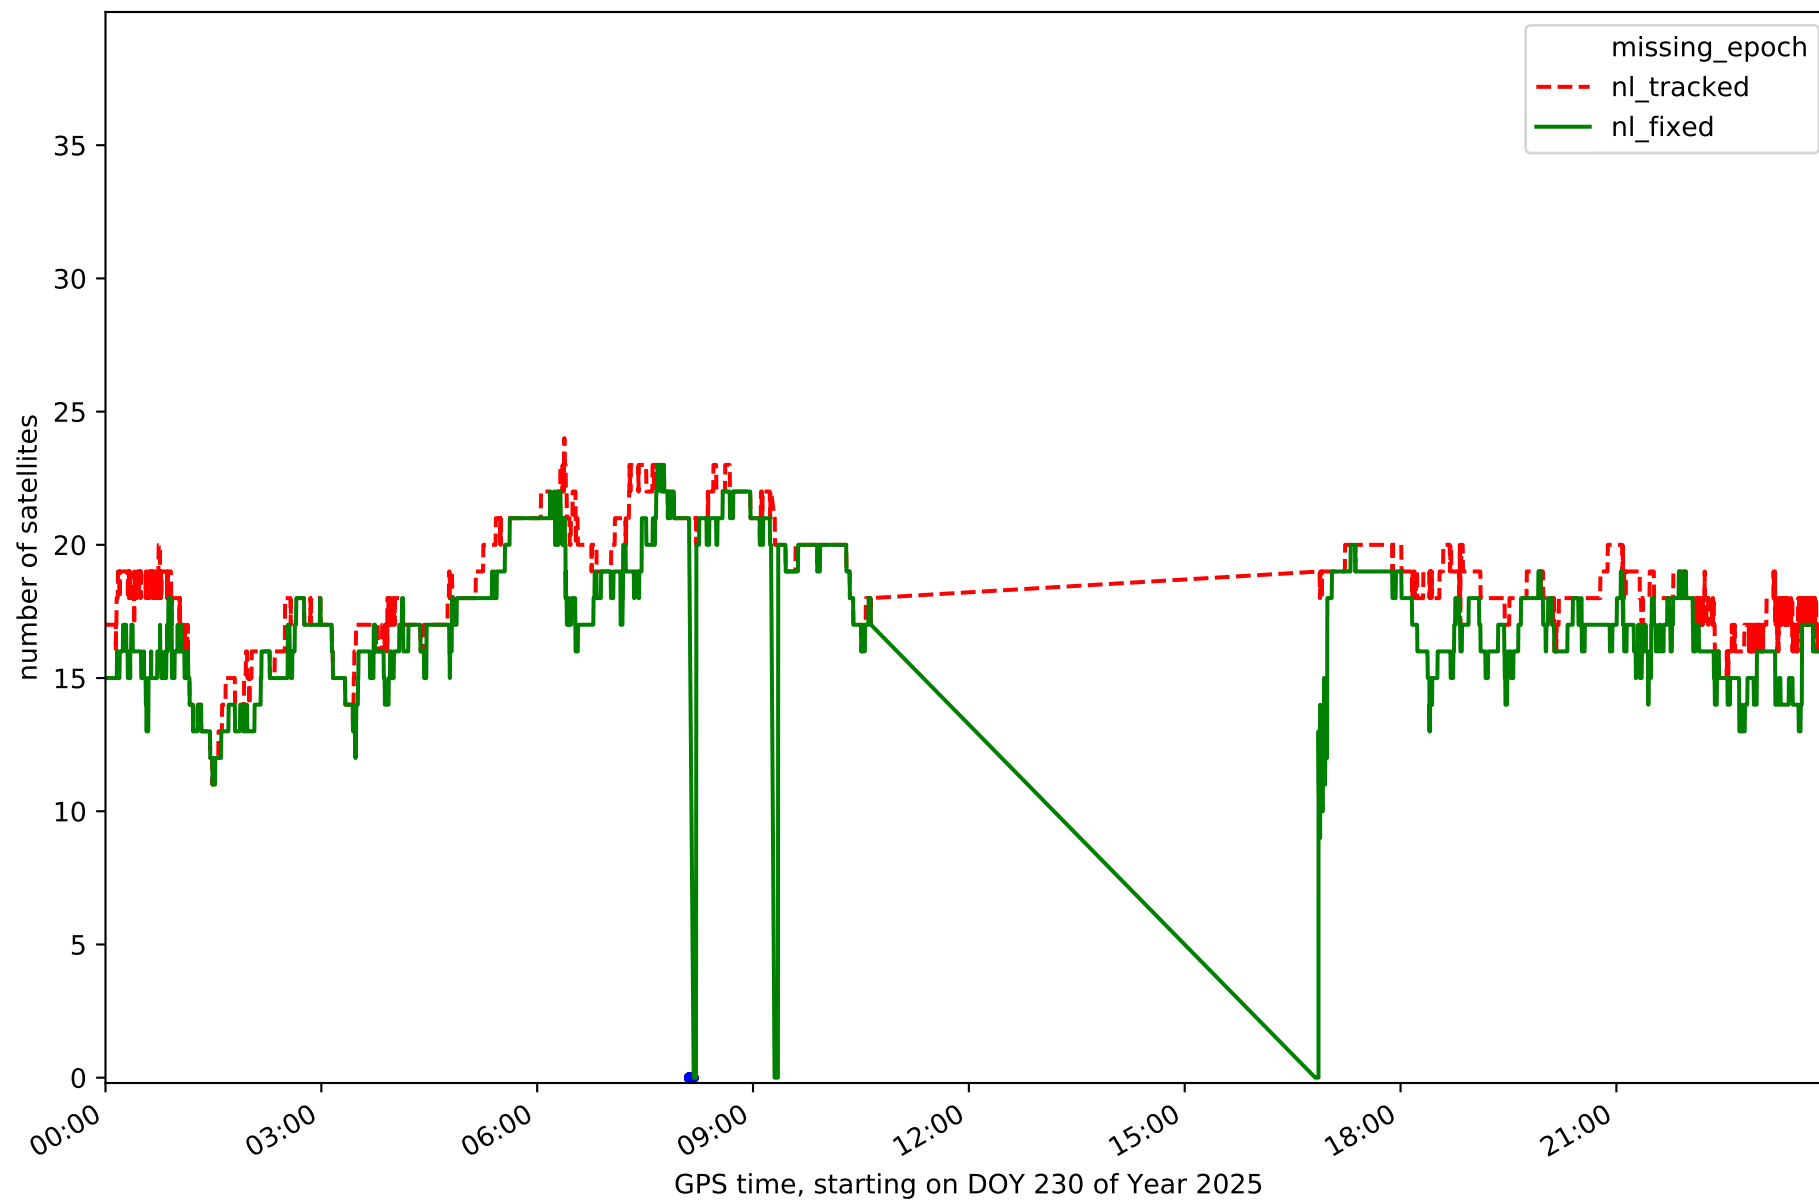


Station EH02 in network N32T

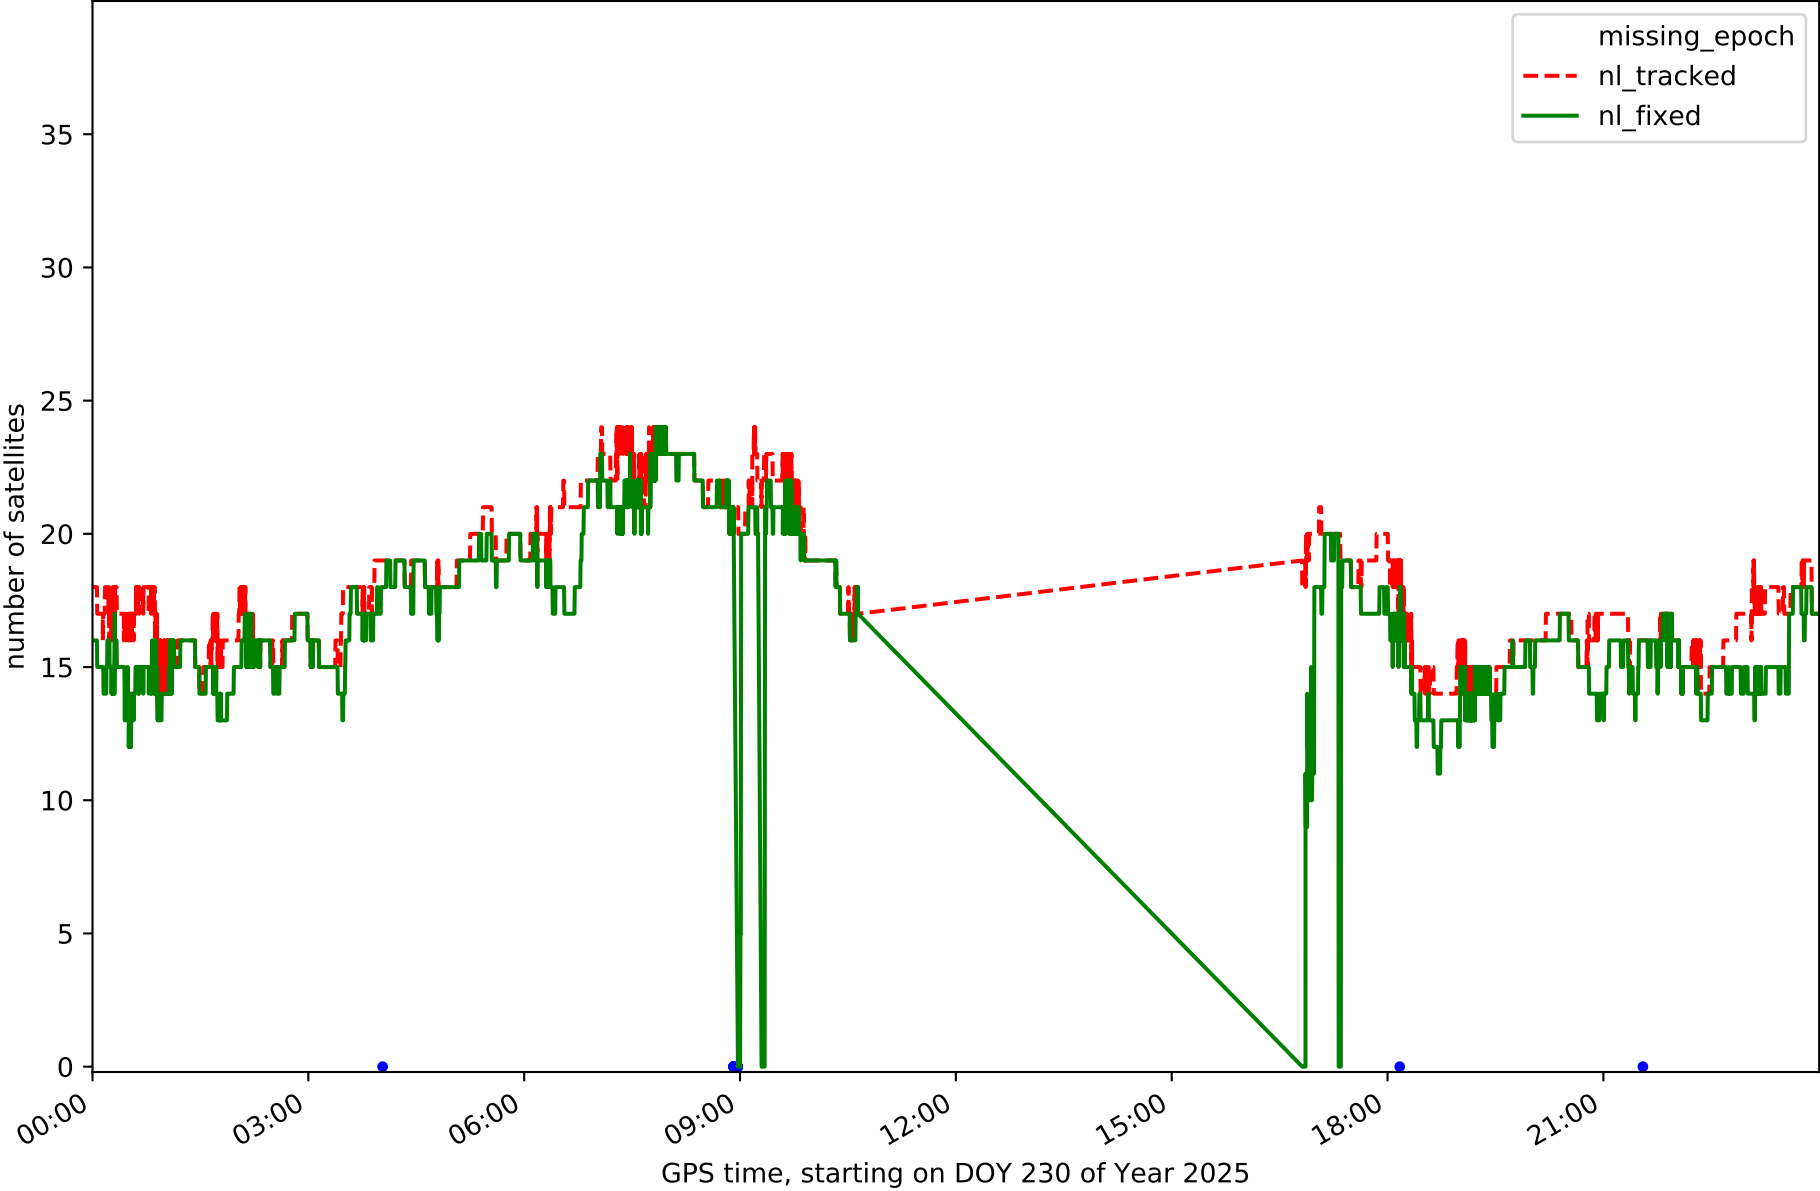


Station GOM1 in network N32T

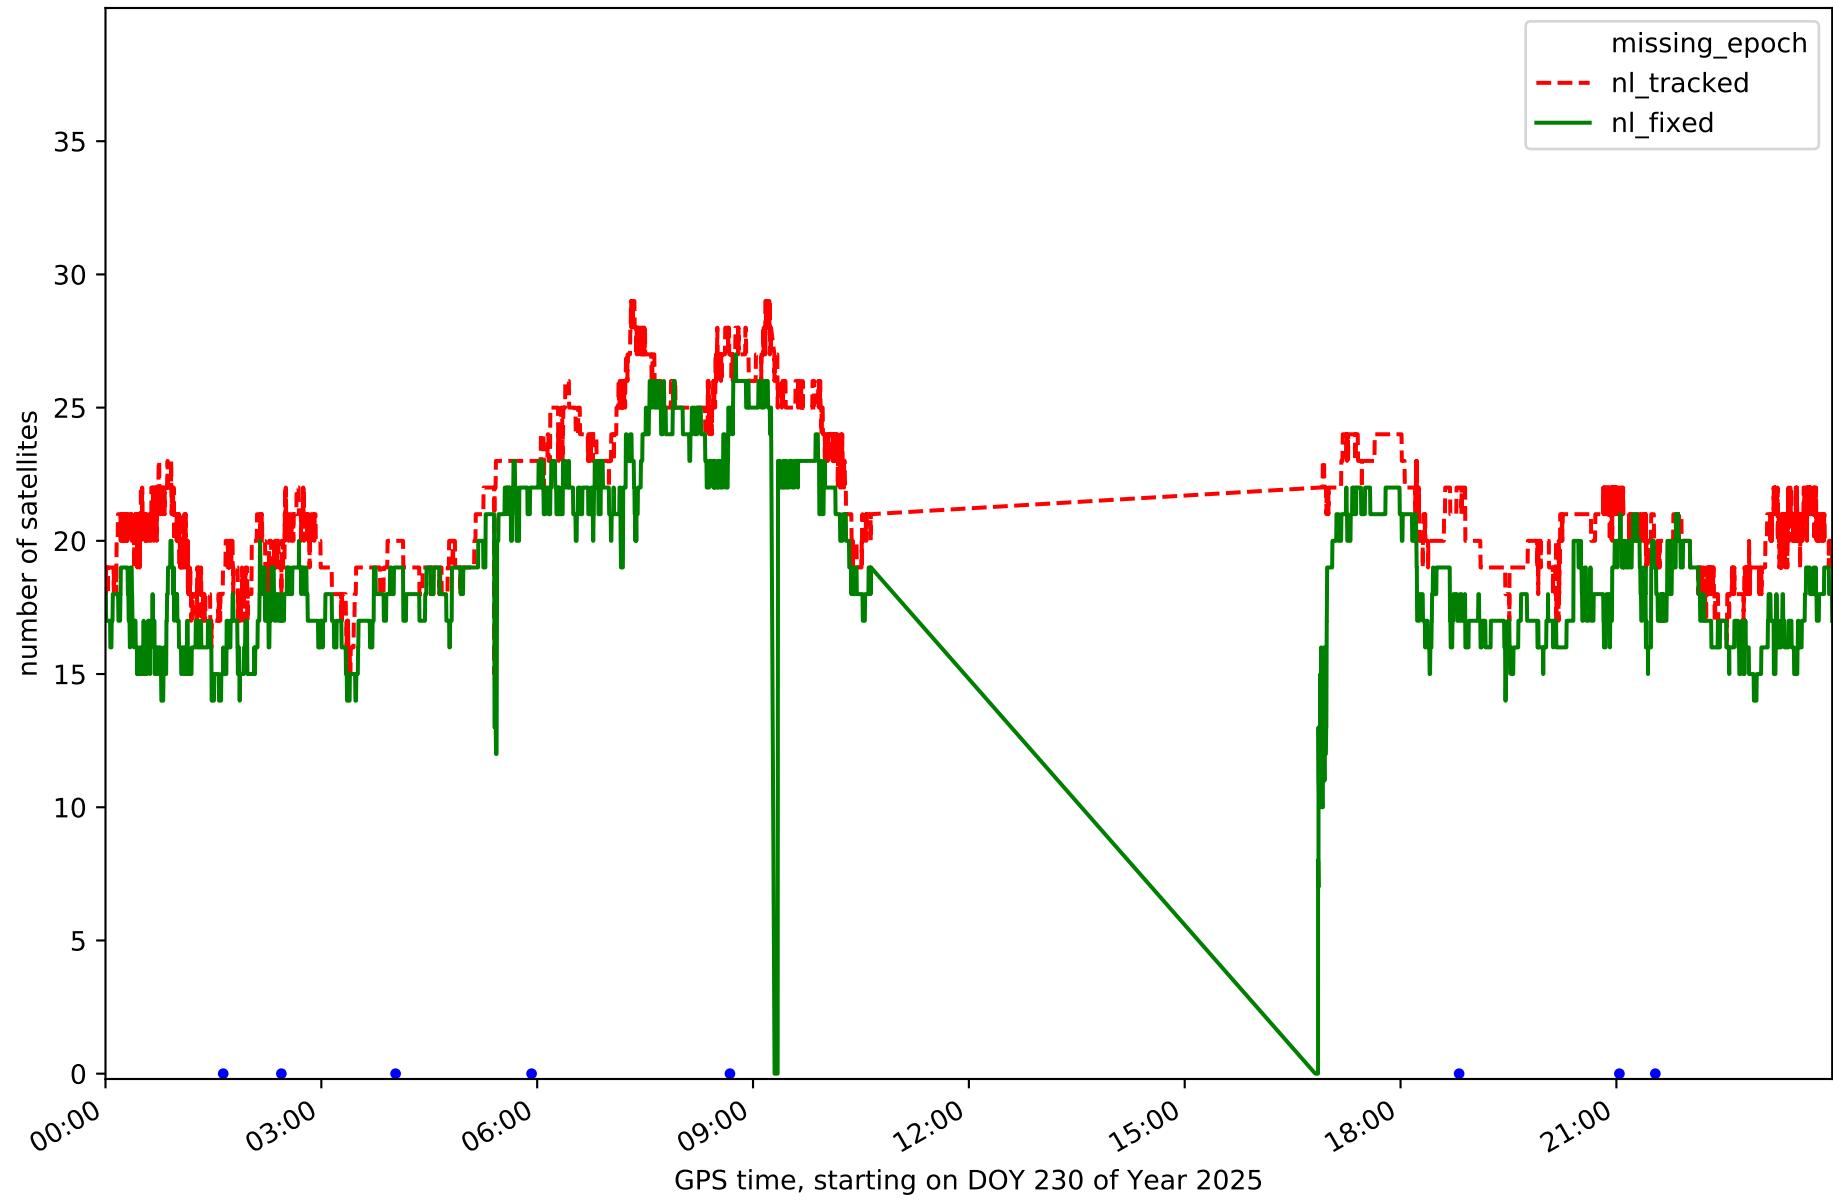


Station IZAN in network N32T

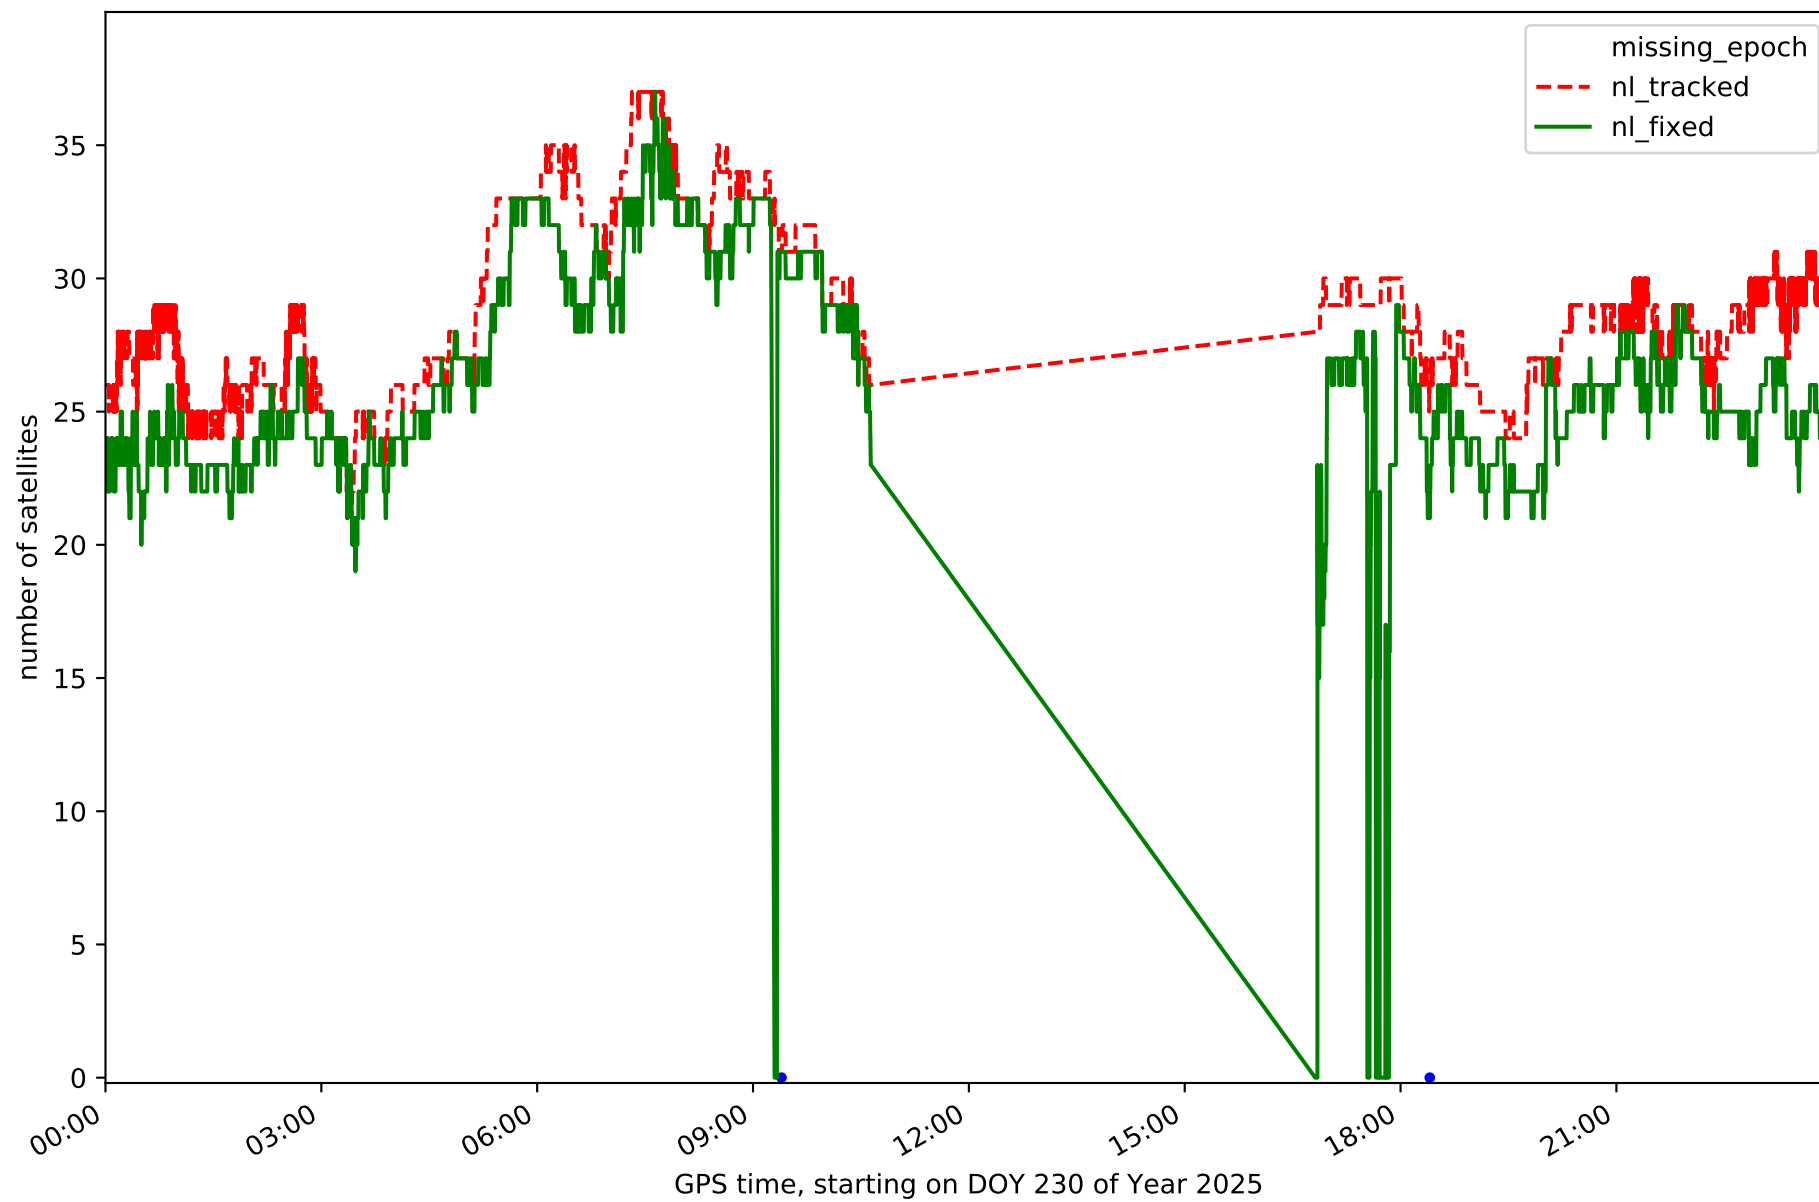


Station LP01 in network N32T

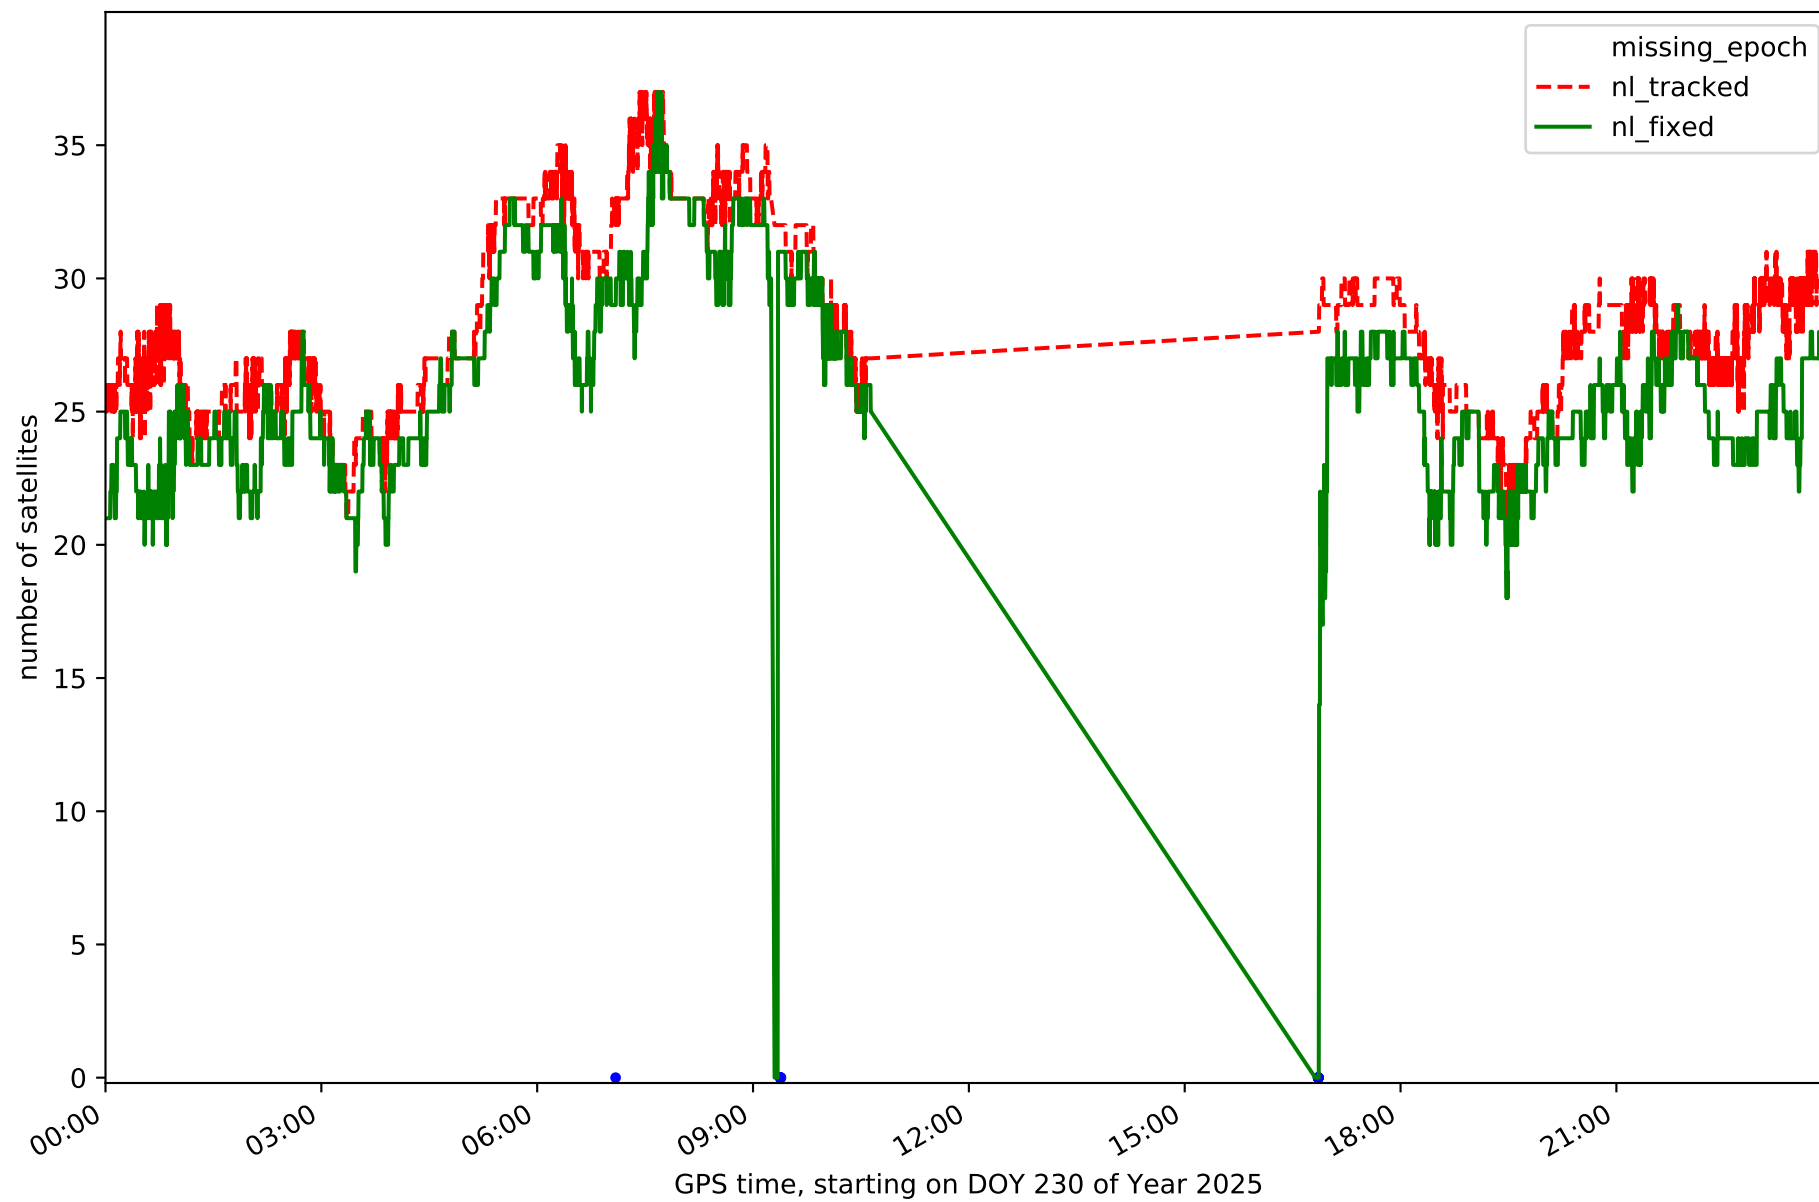


Station LP03 in network N32T

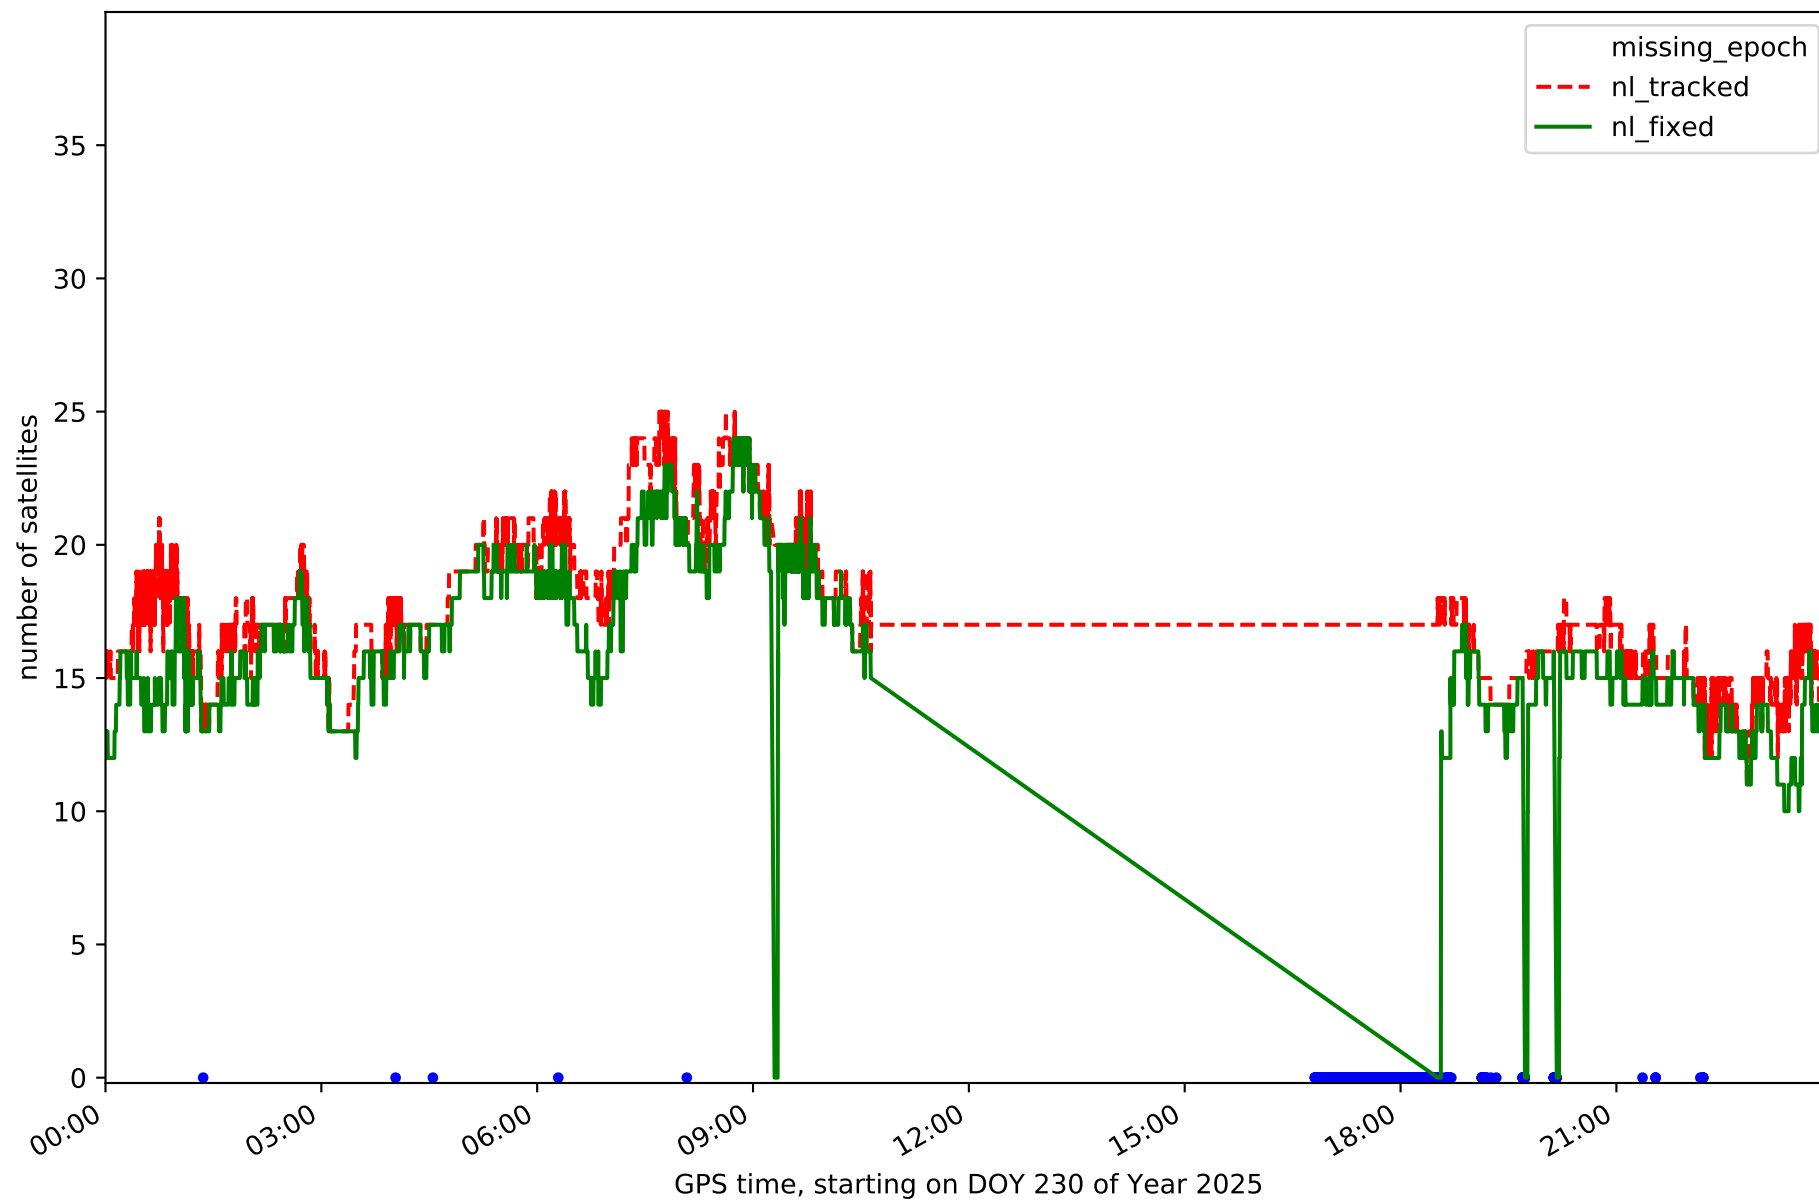


Station LPAL in network N32T

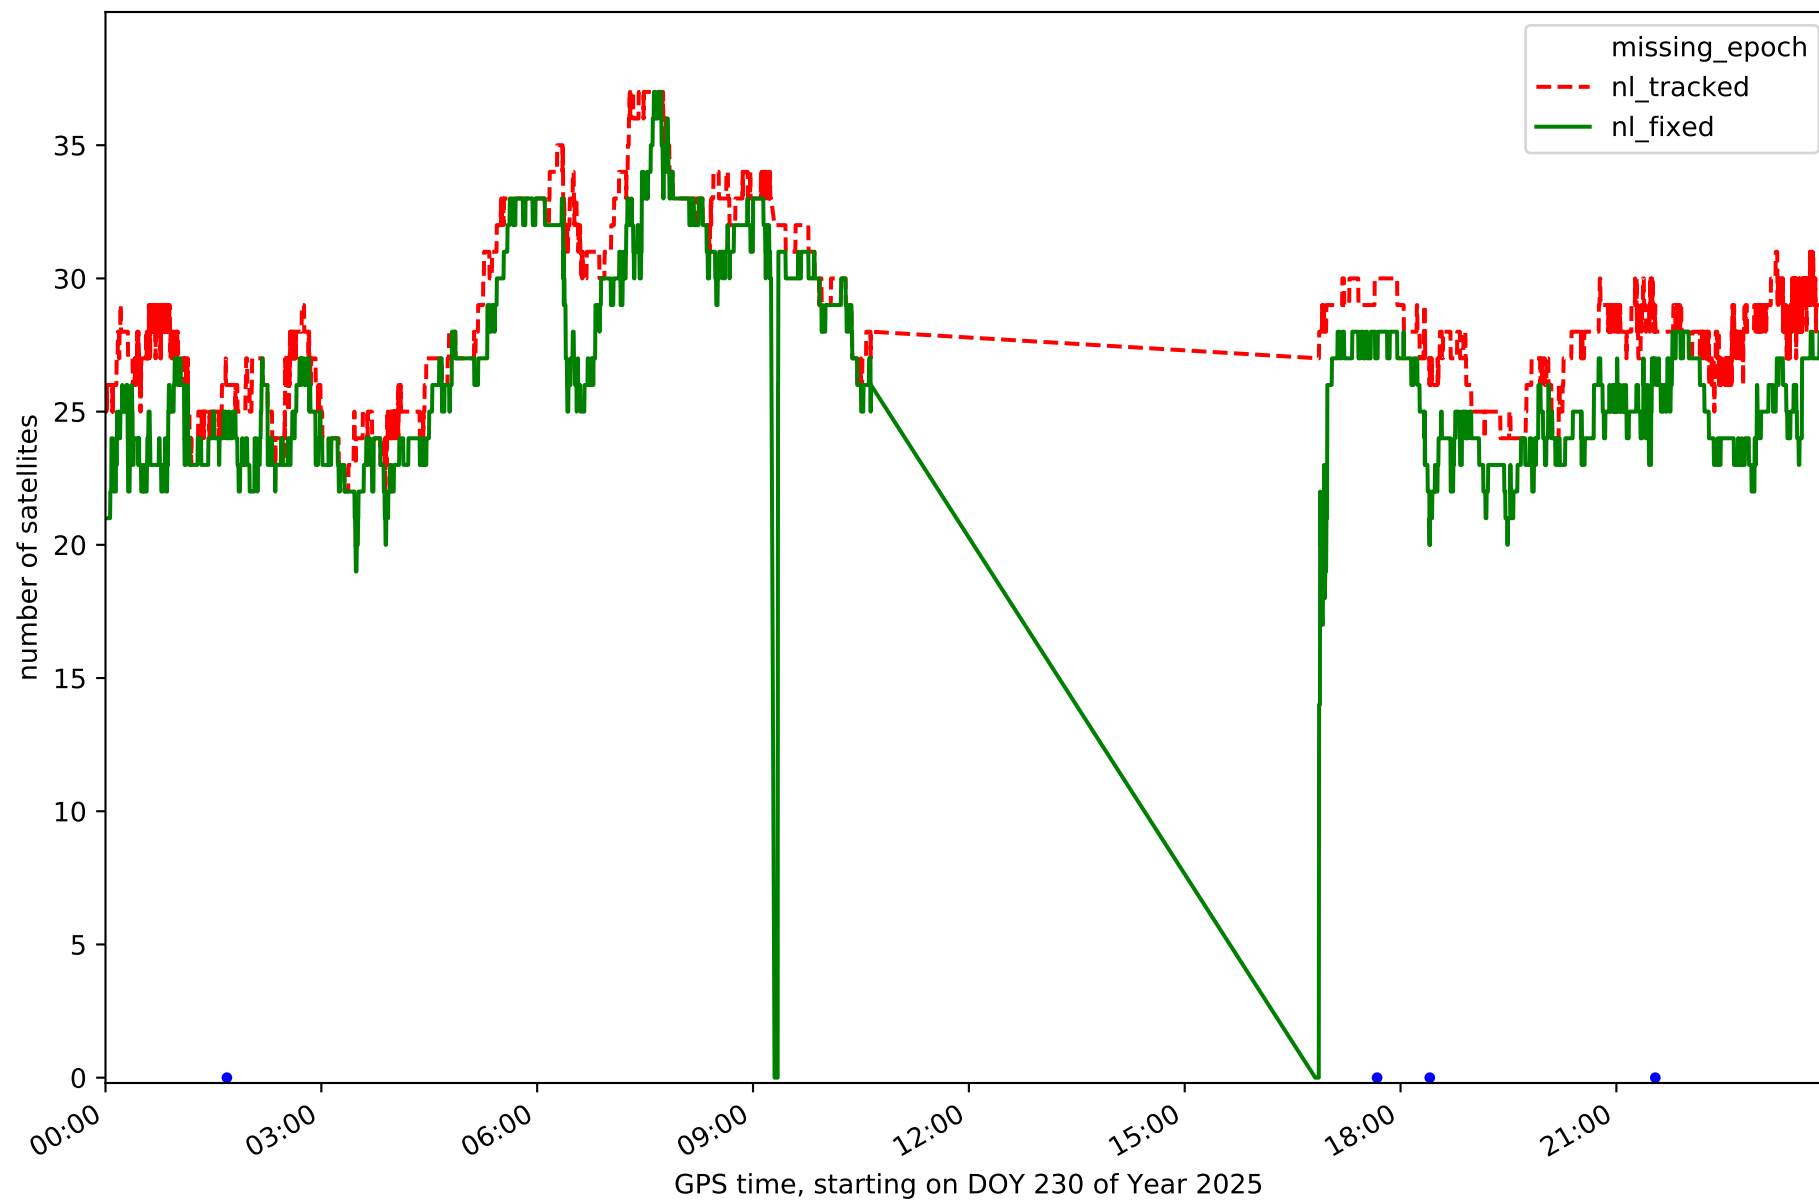


Station LRES in network N32T

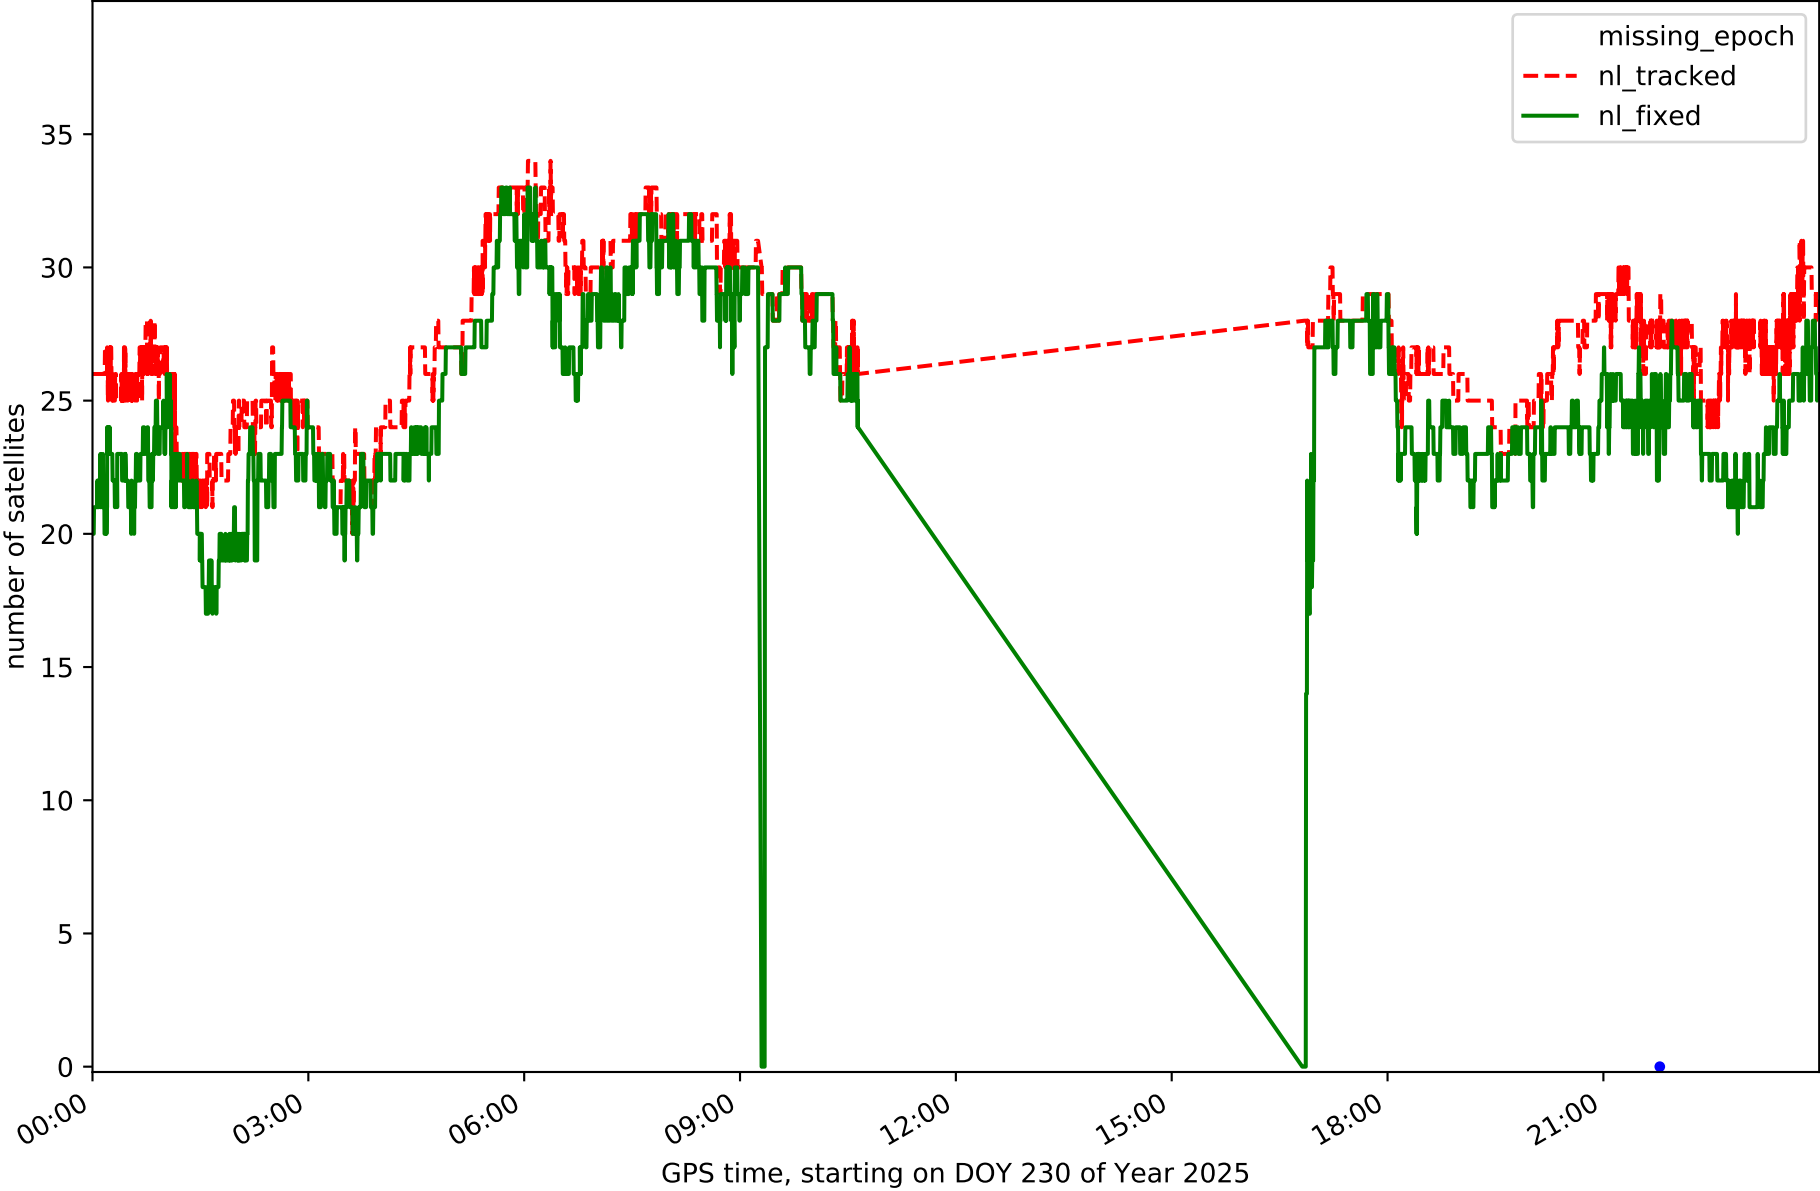


Station TN01 in network N32T

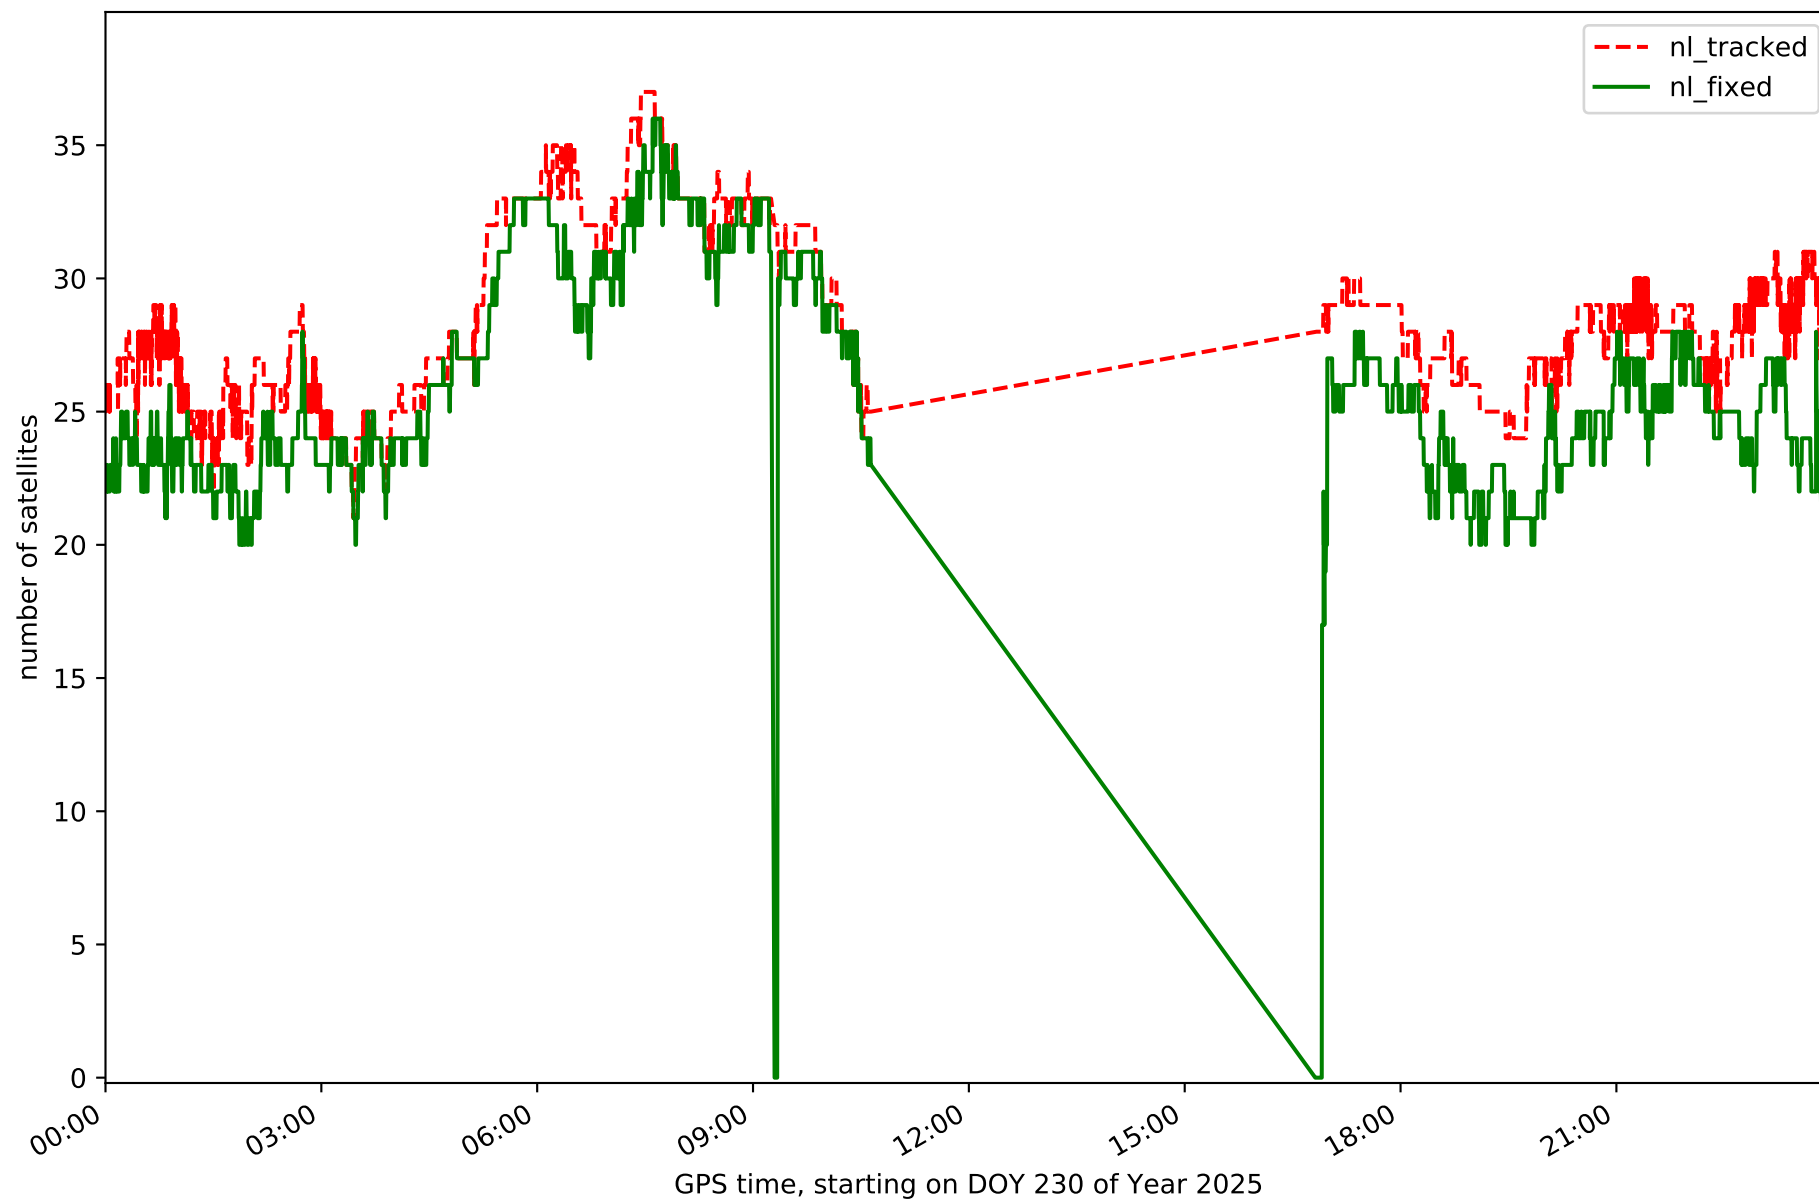


Station TN02 in network N32T

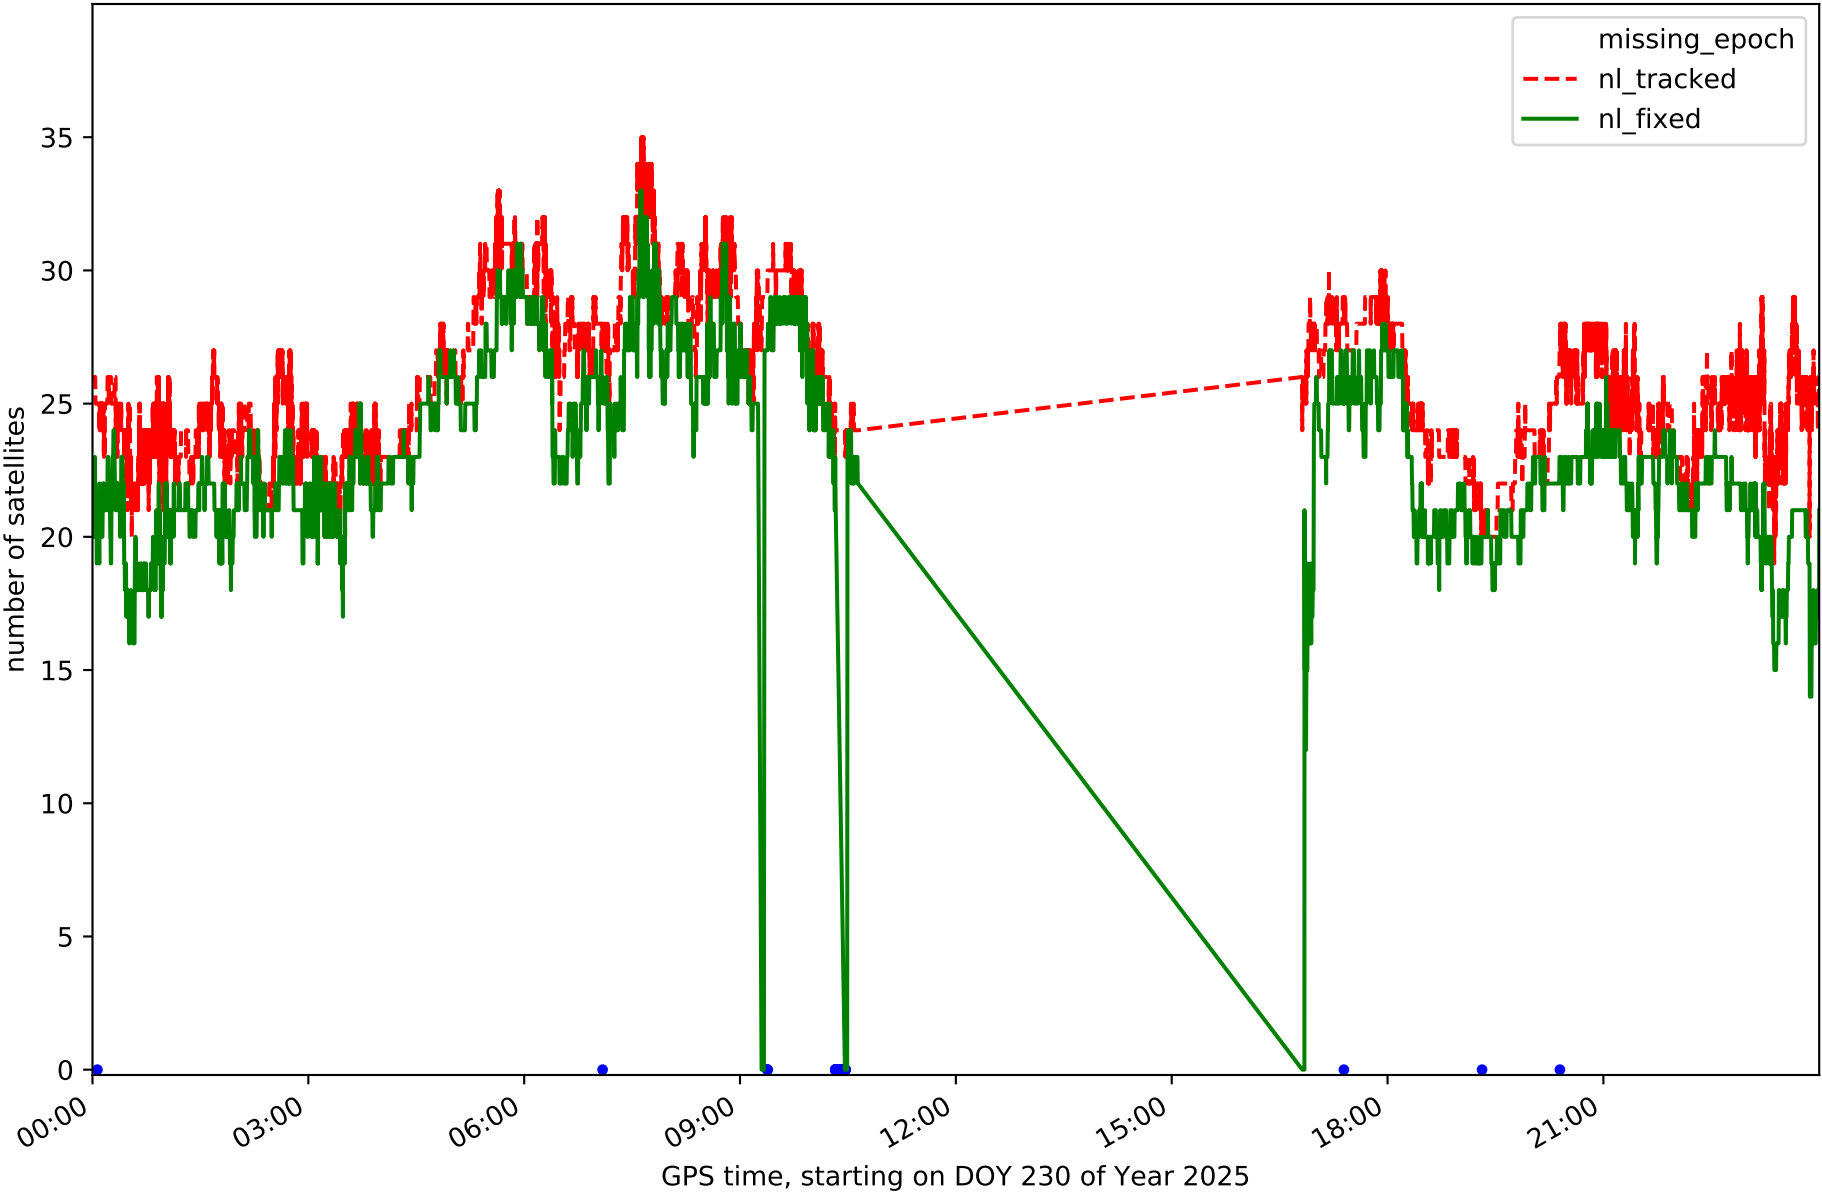


Station TN03 in network N32T

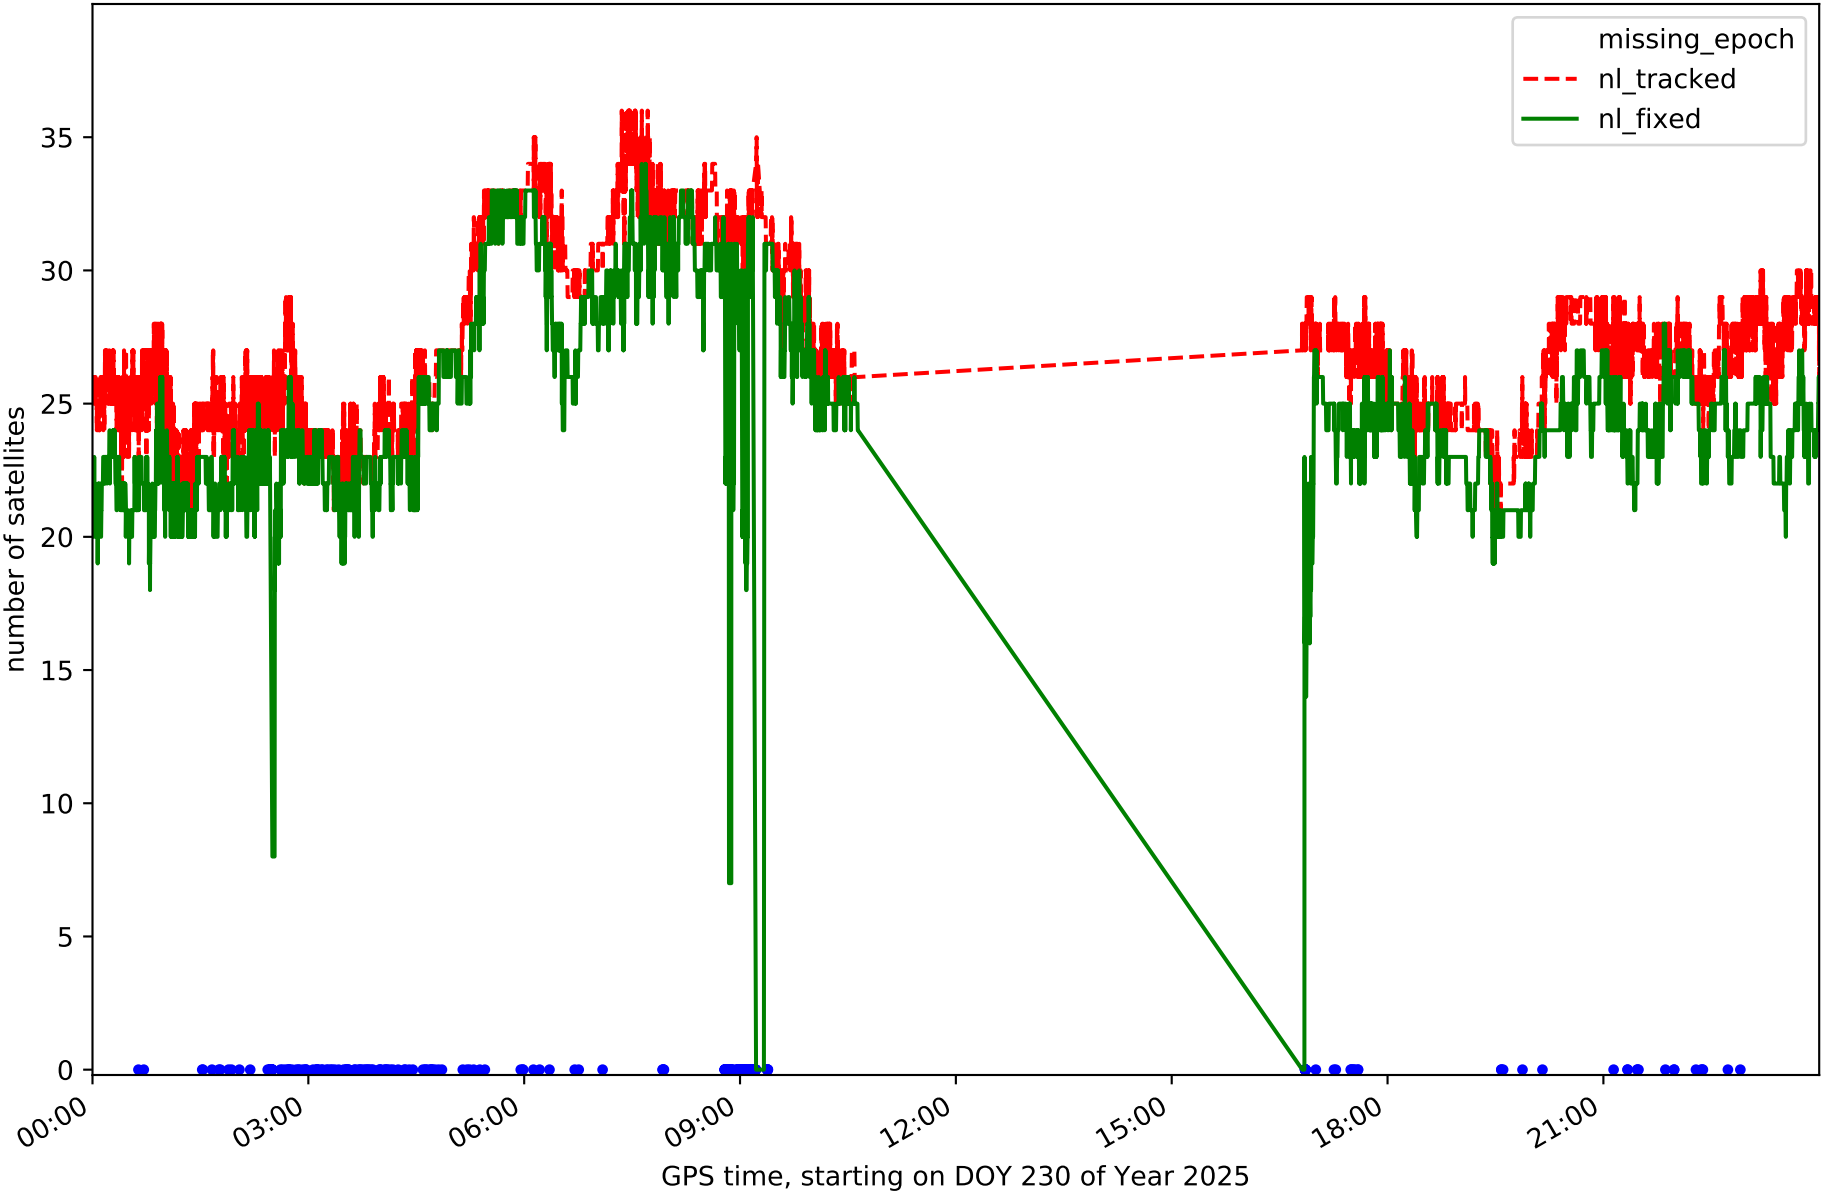


Station TN04 in network N32T

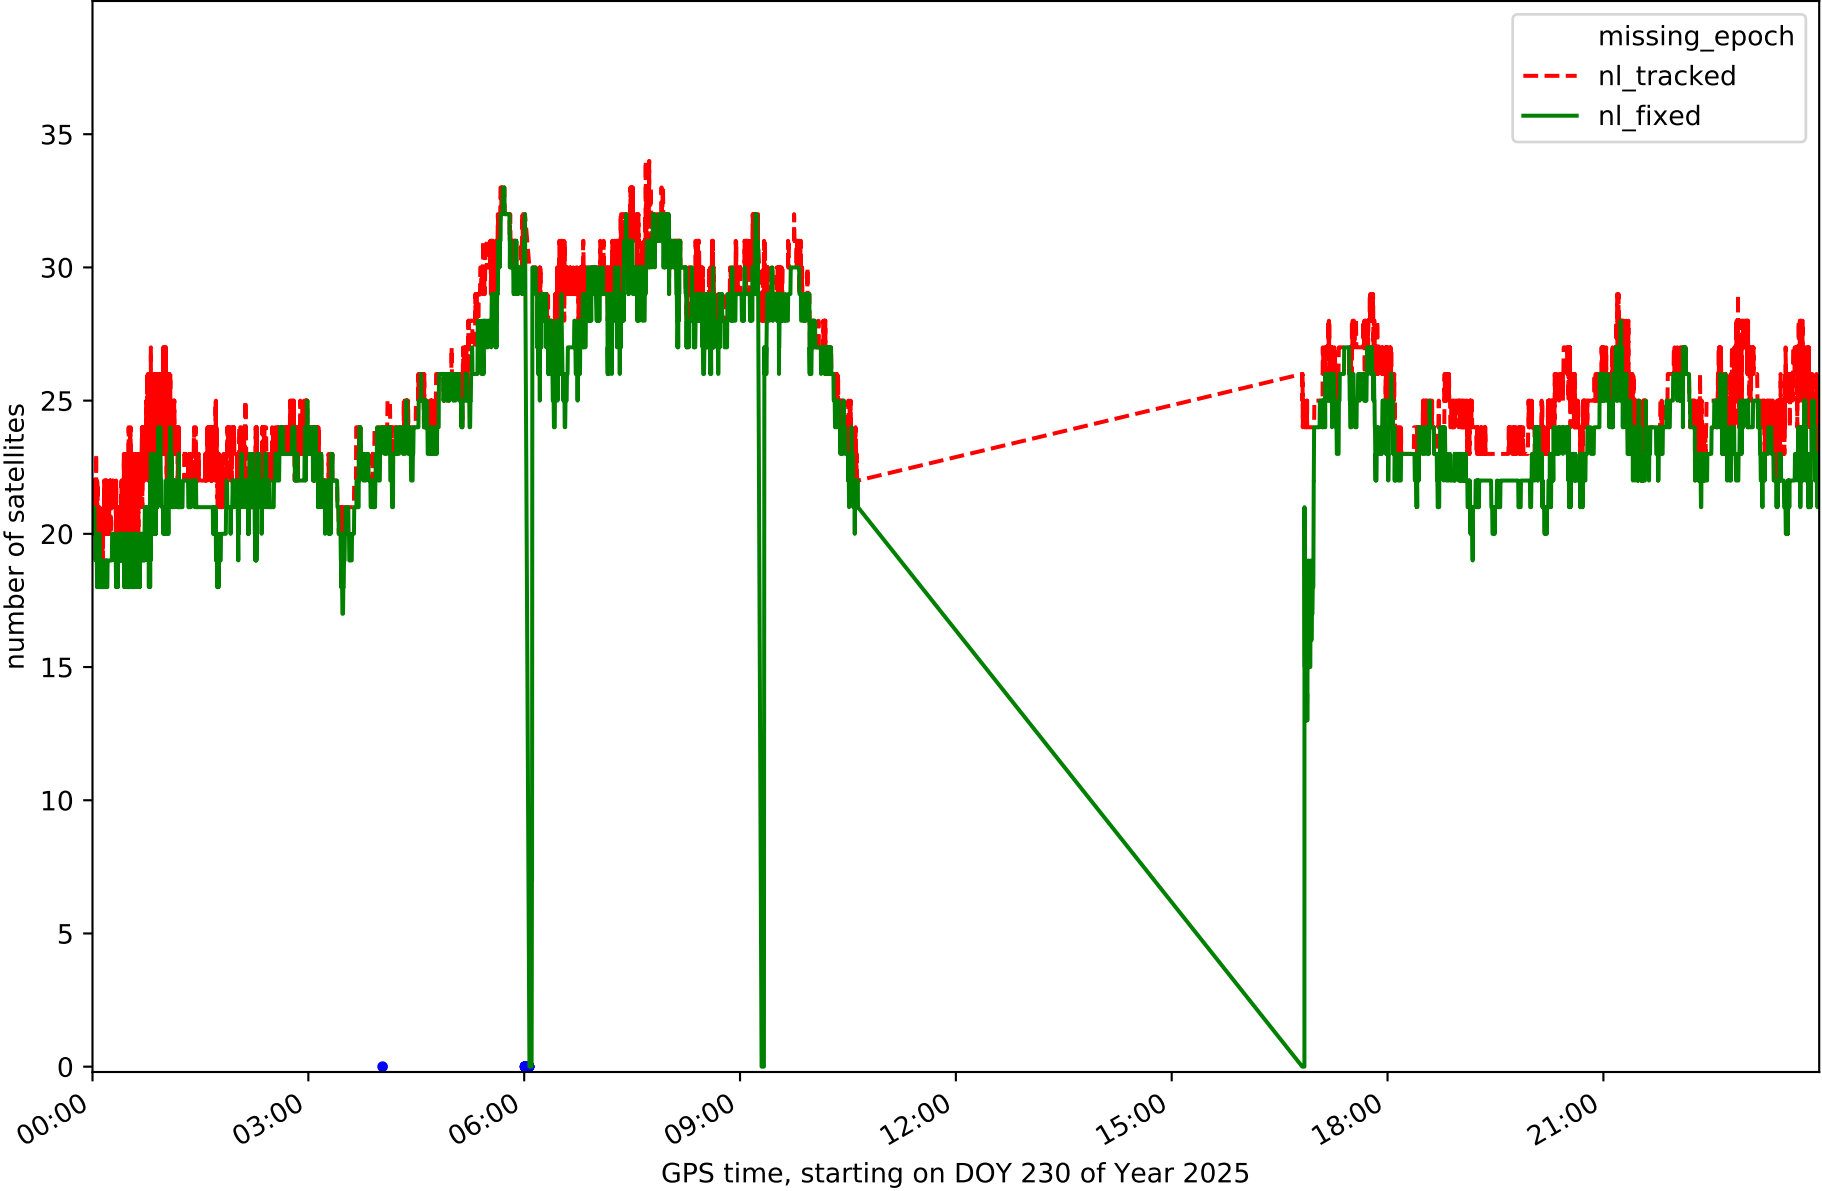


Station TN06 in network N32T

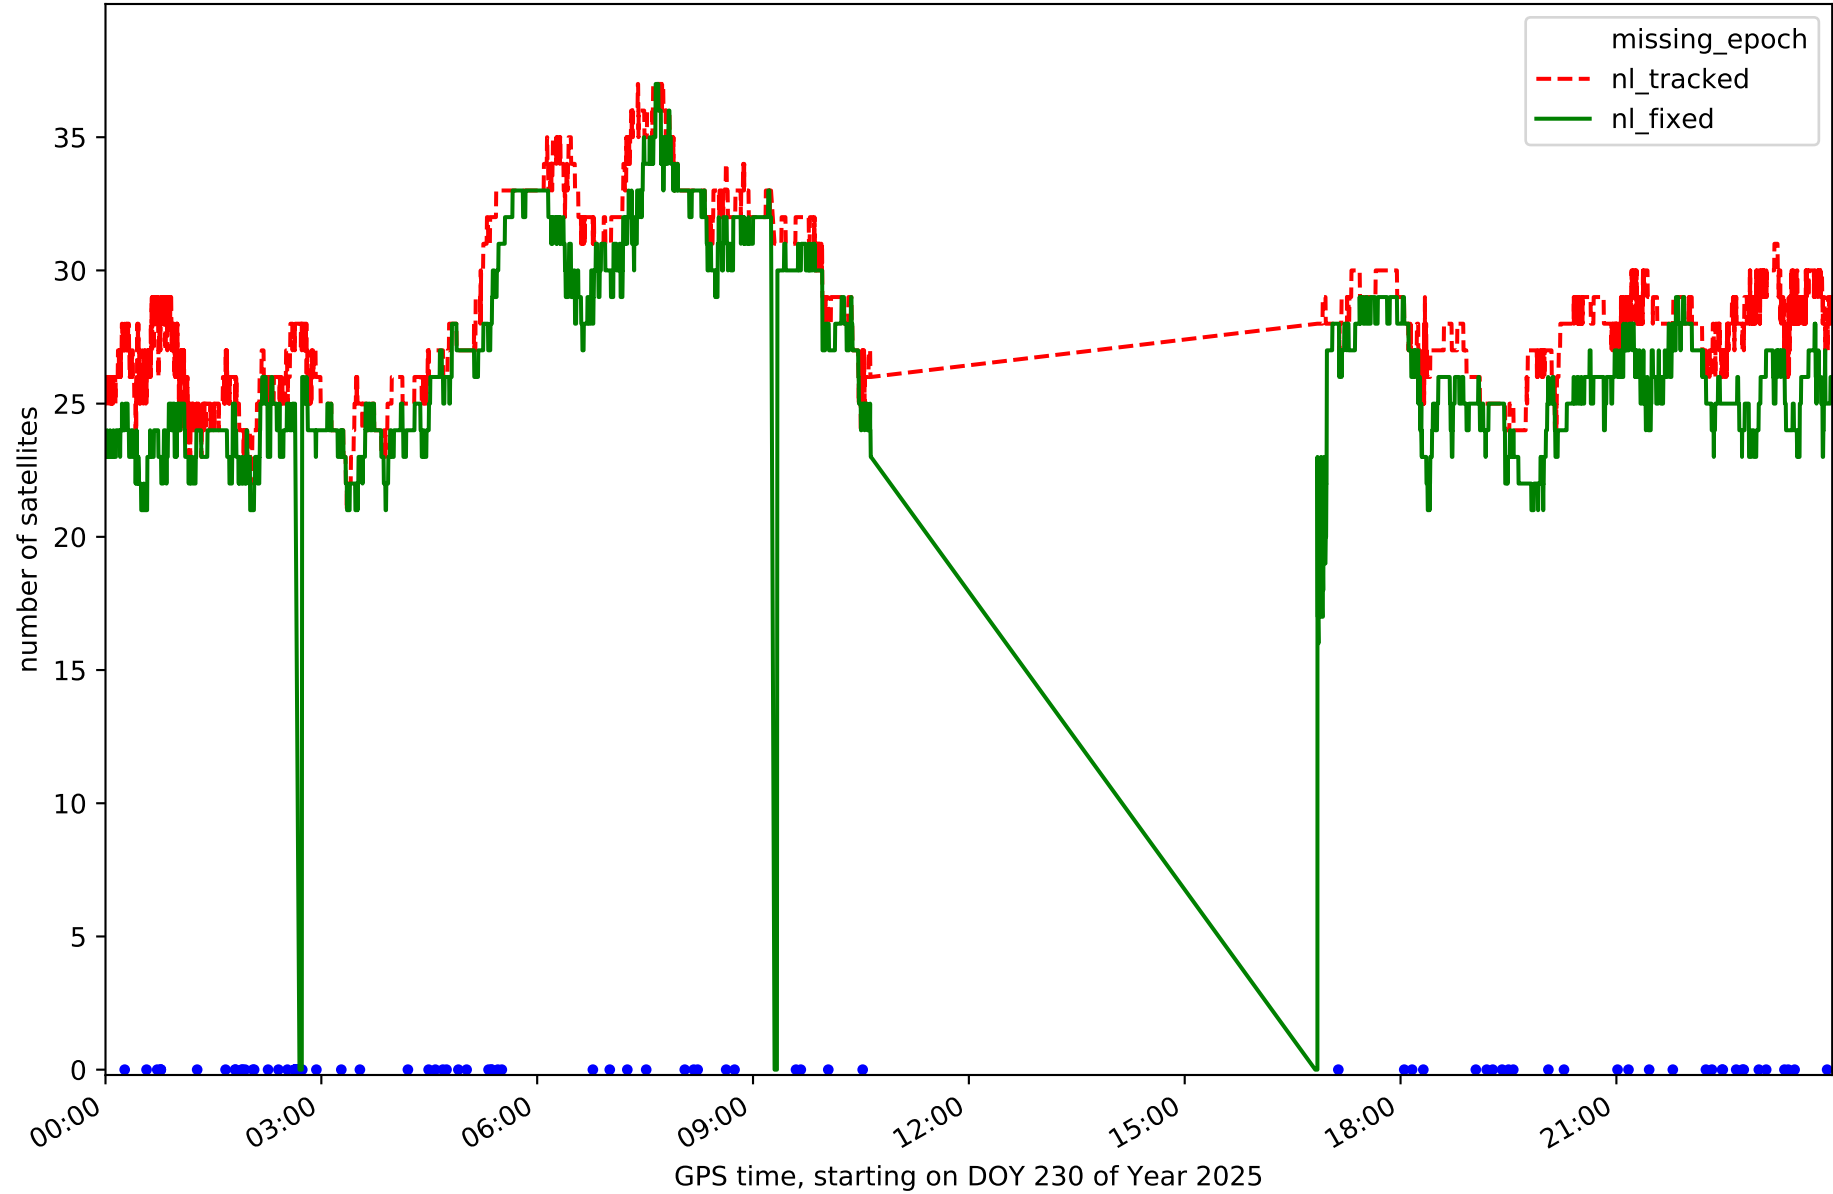


Station TN09 in network N32T

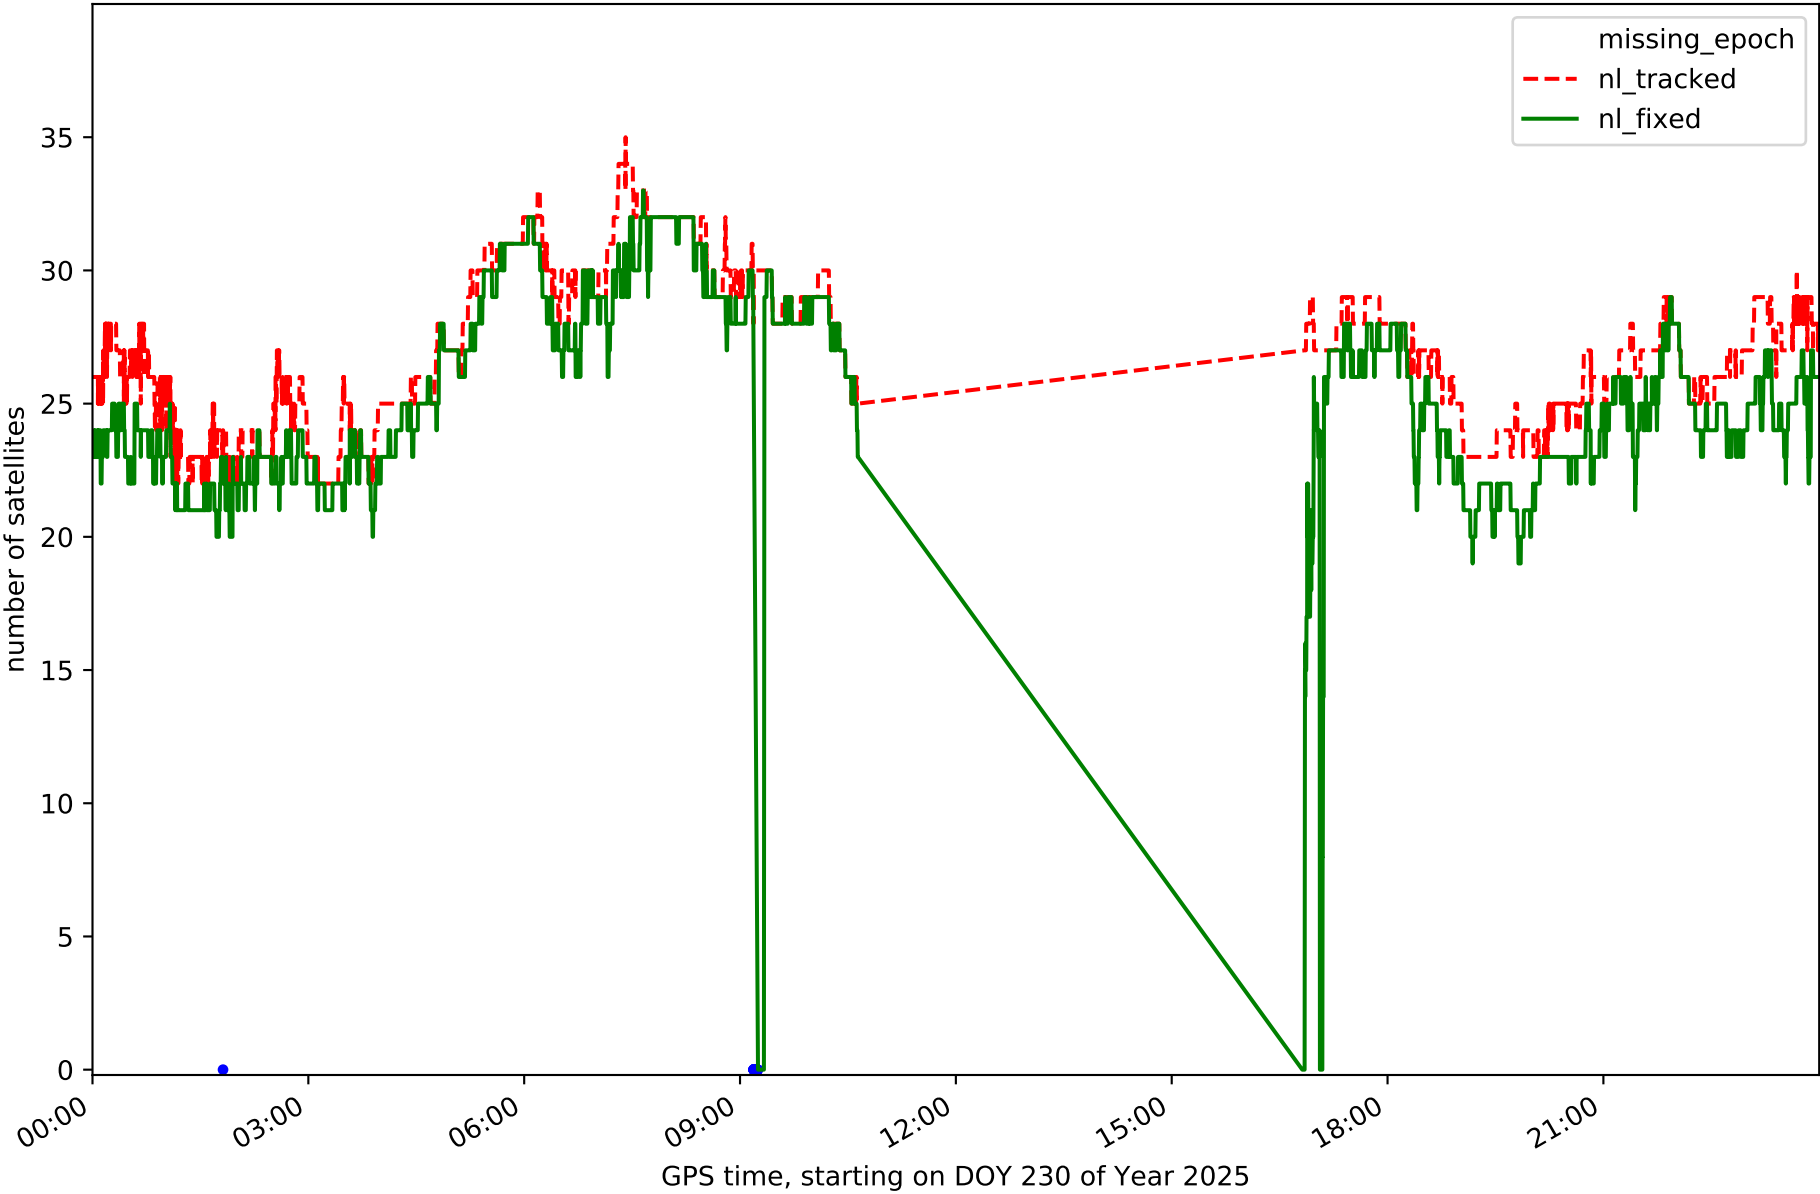


Station TE11 in network N32T

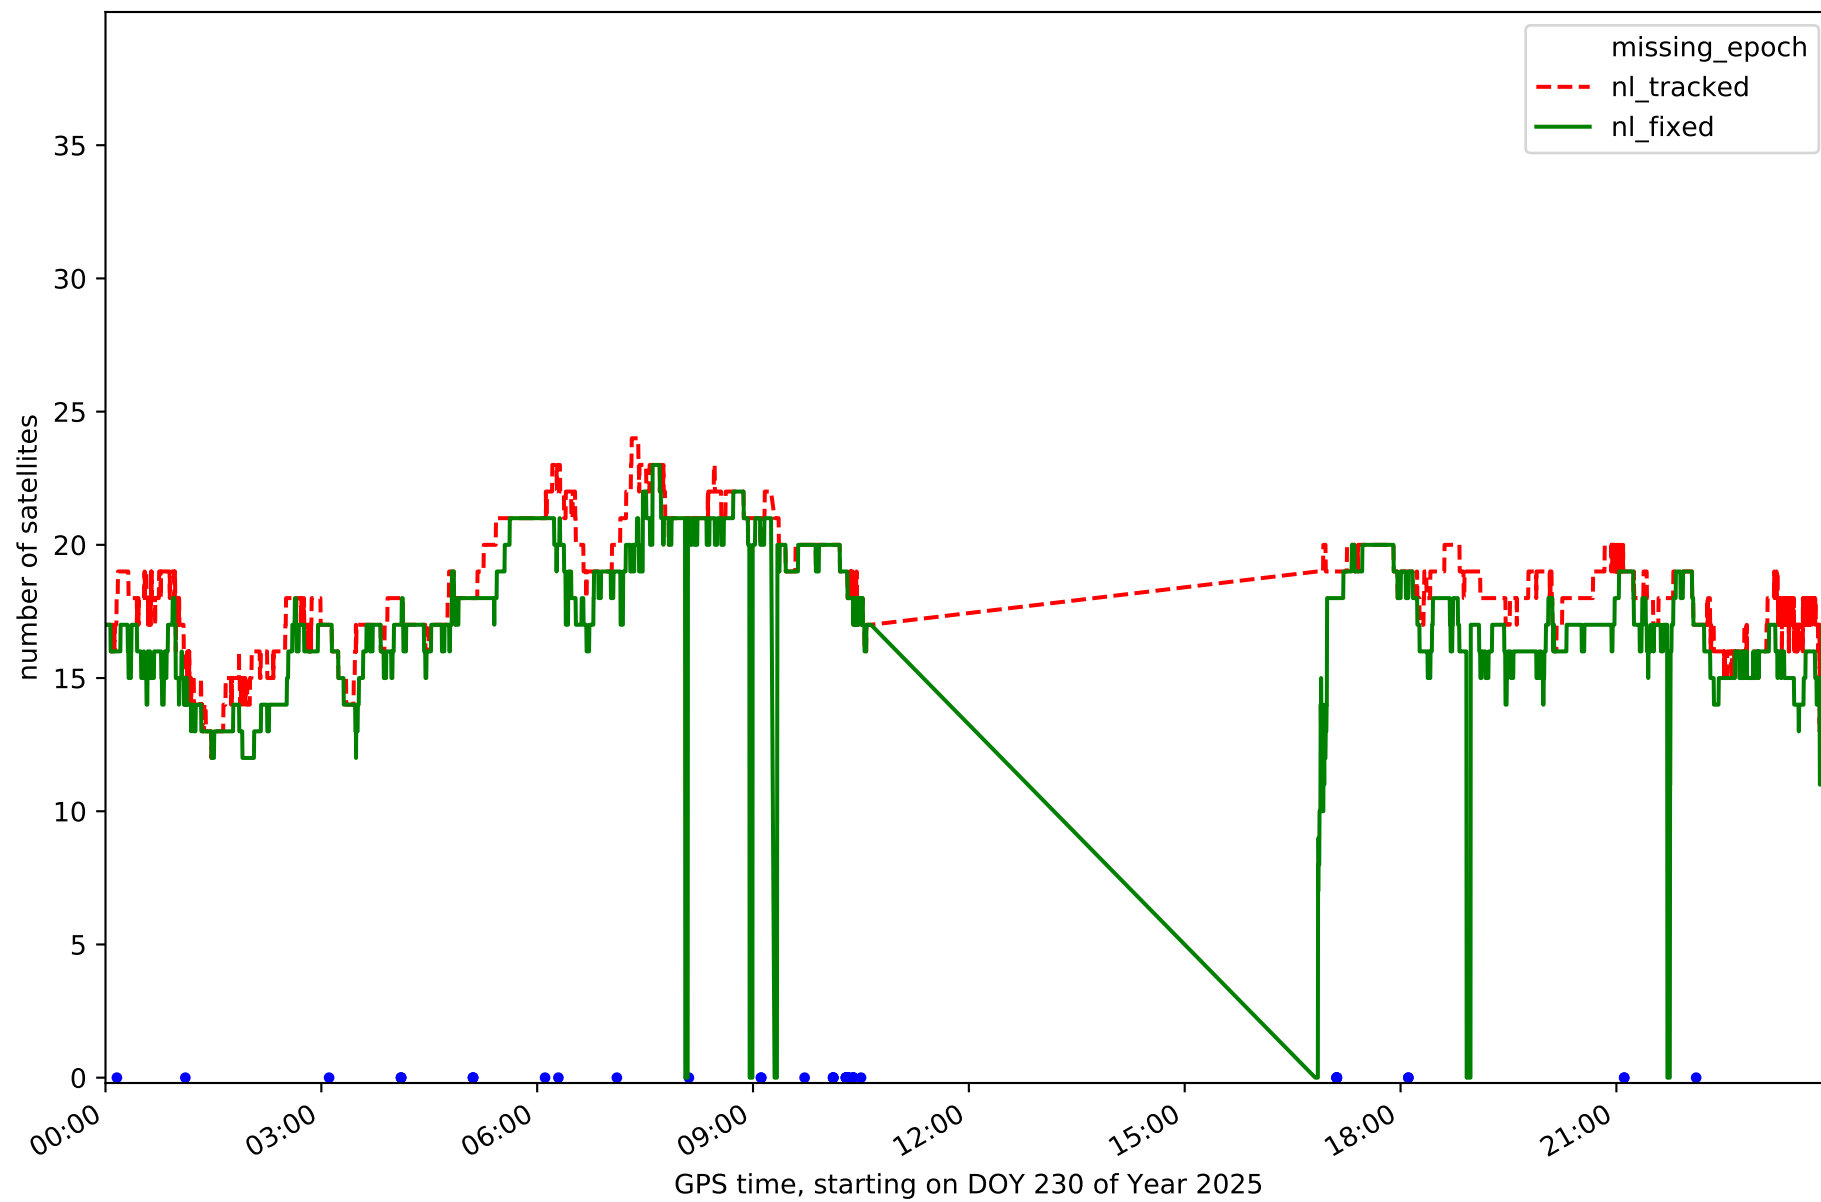


RefCheck for station EH01 in network N32T

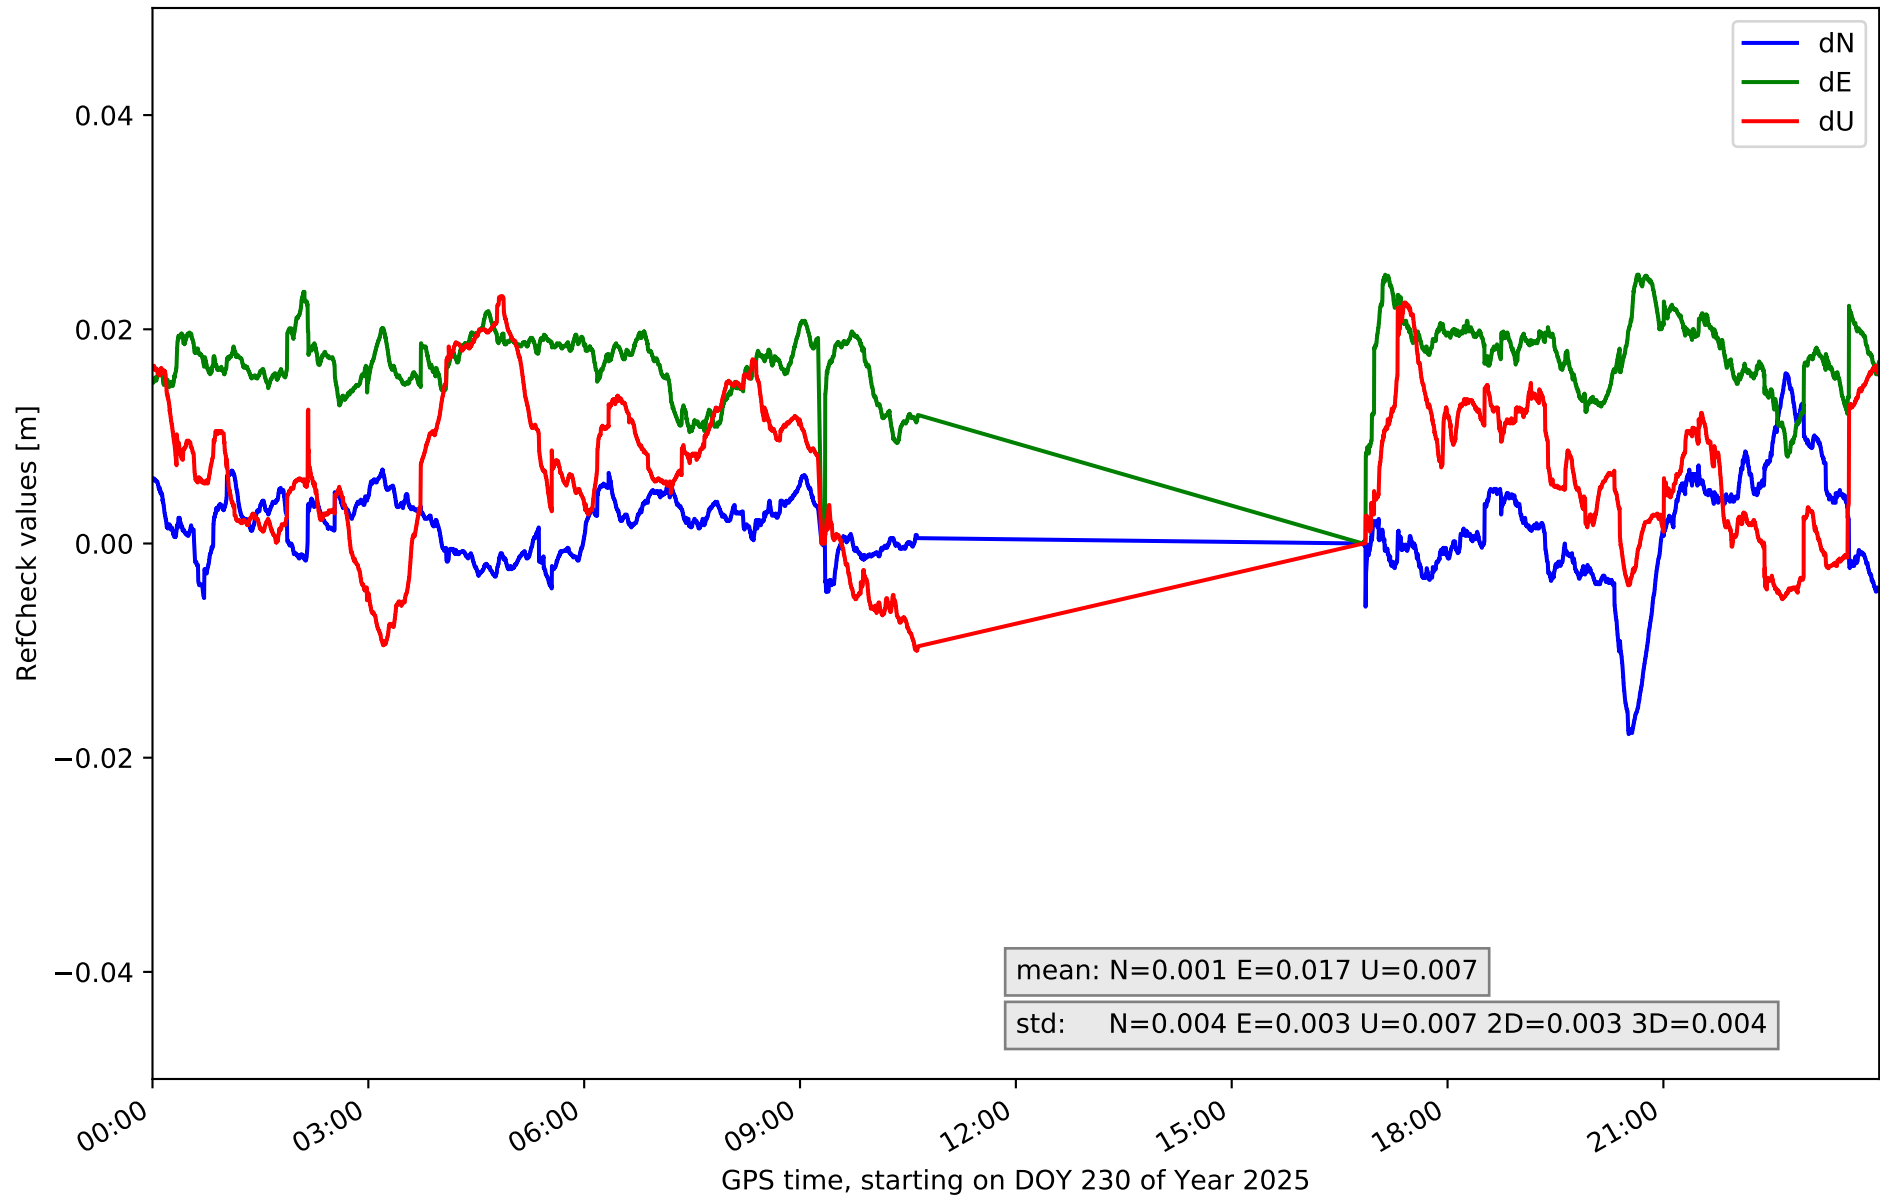


RefCheck for station EH02 in network N32T

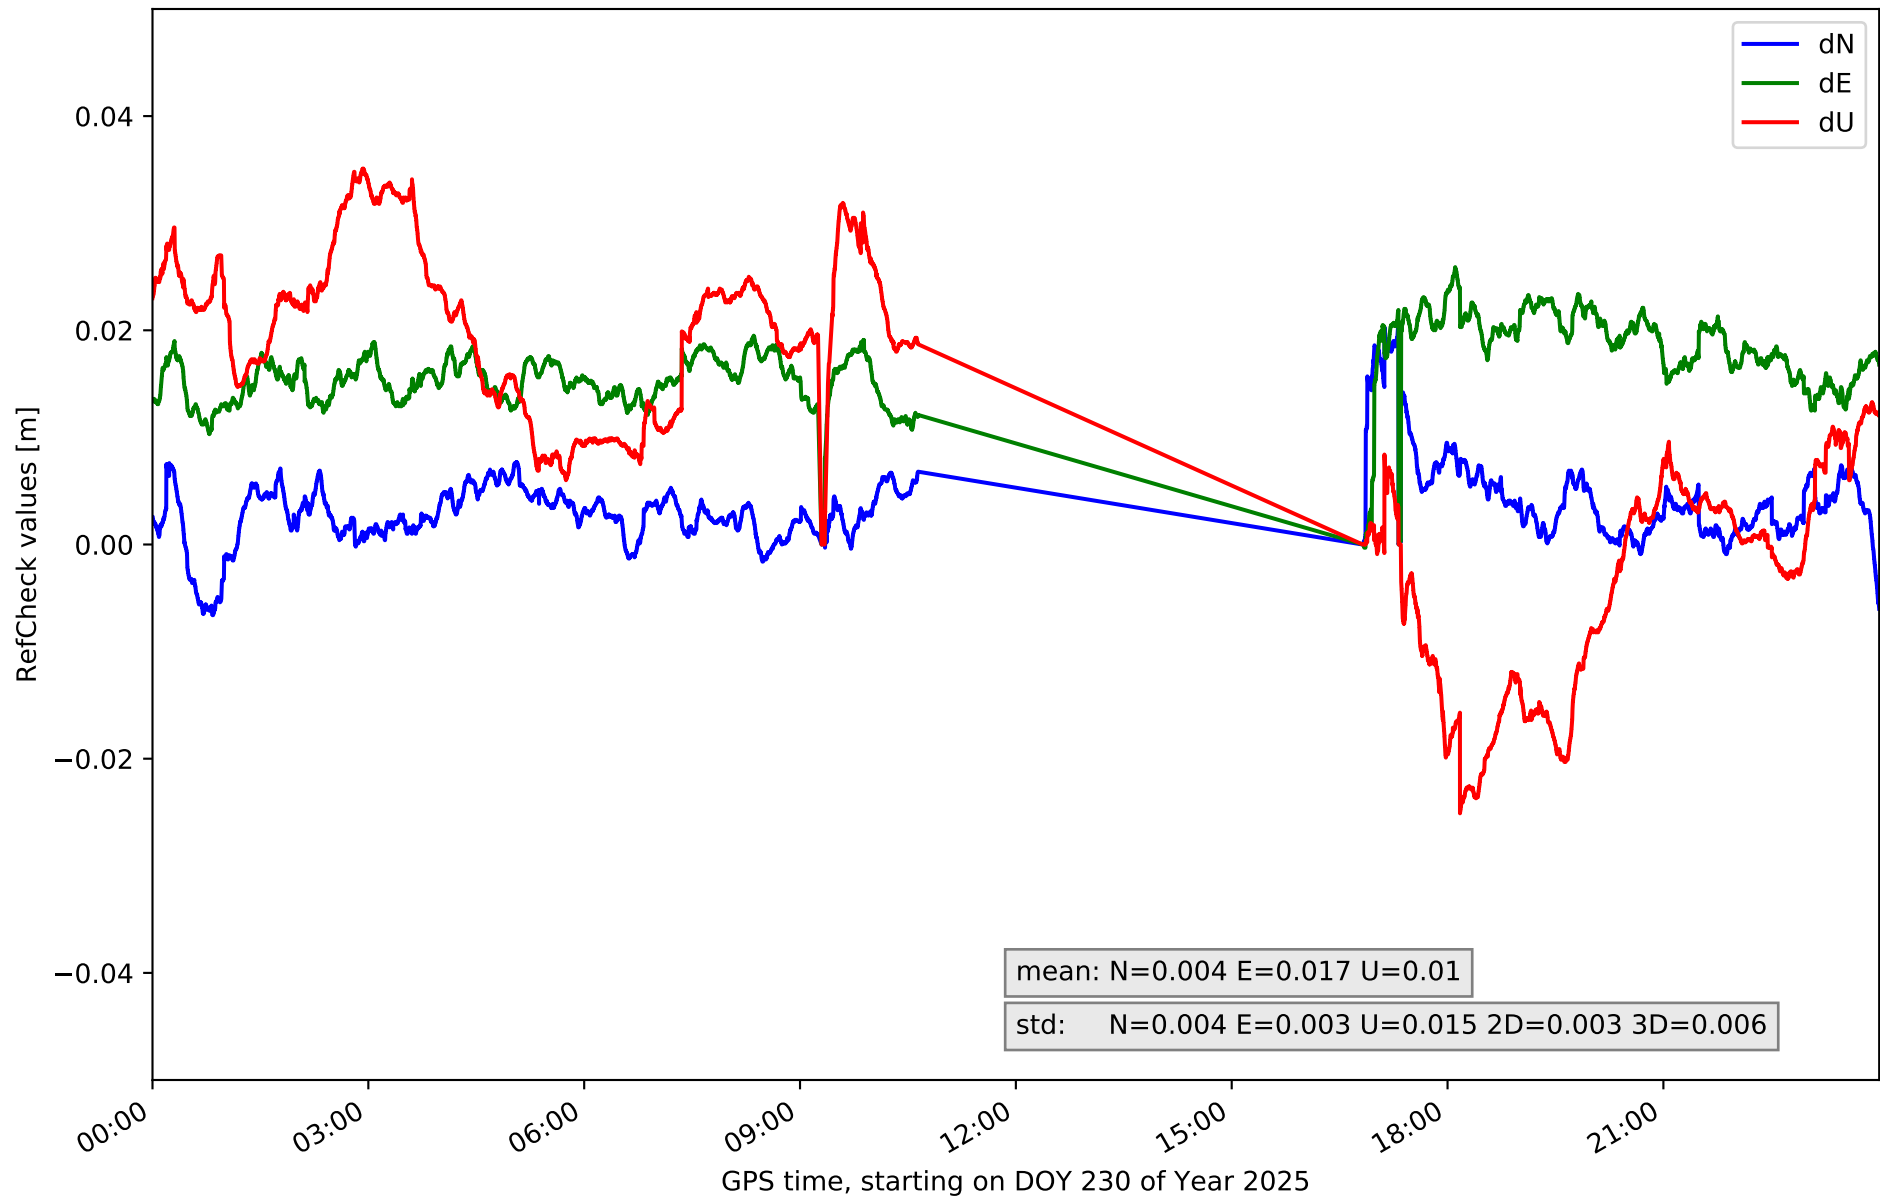


RefCheck for station GOM1 in network N32T

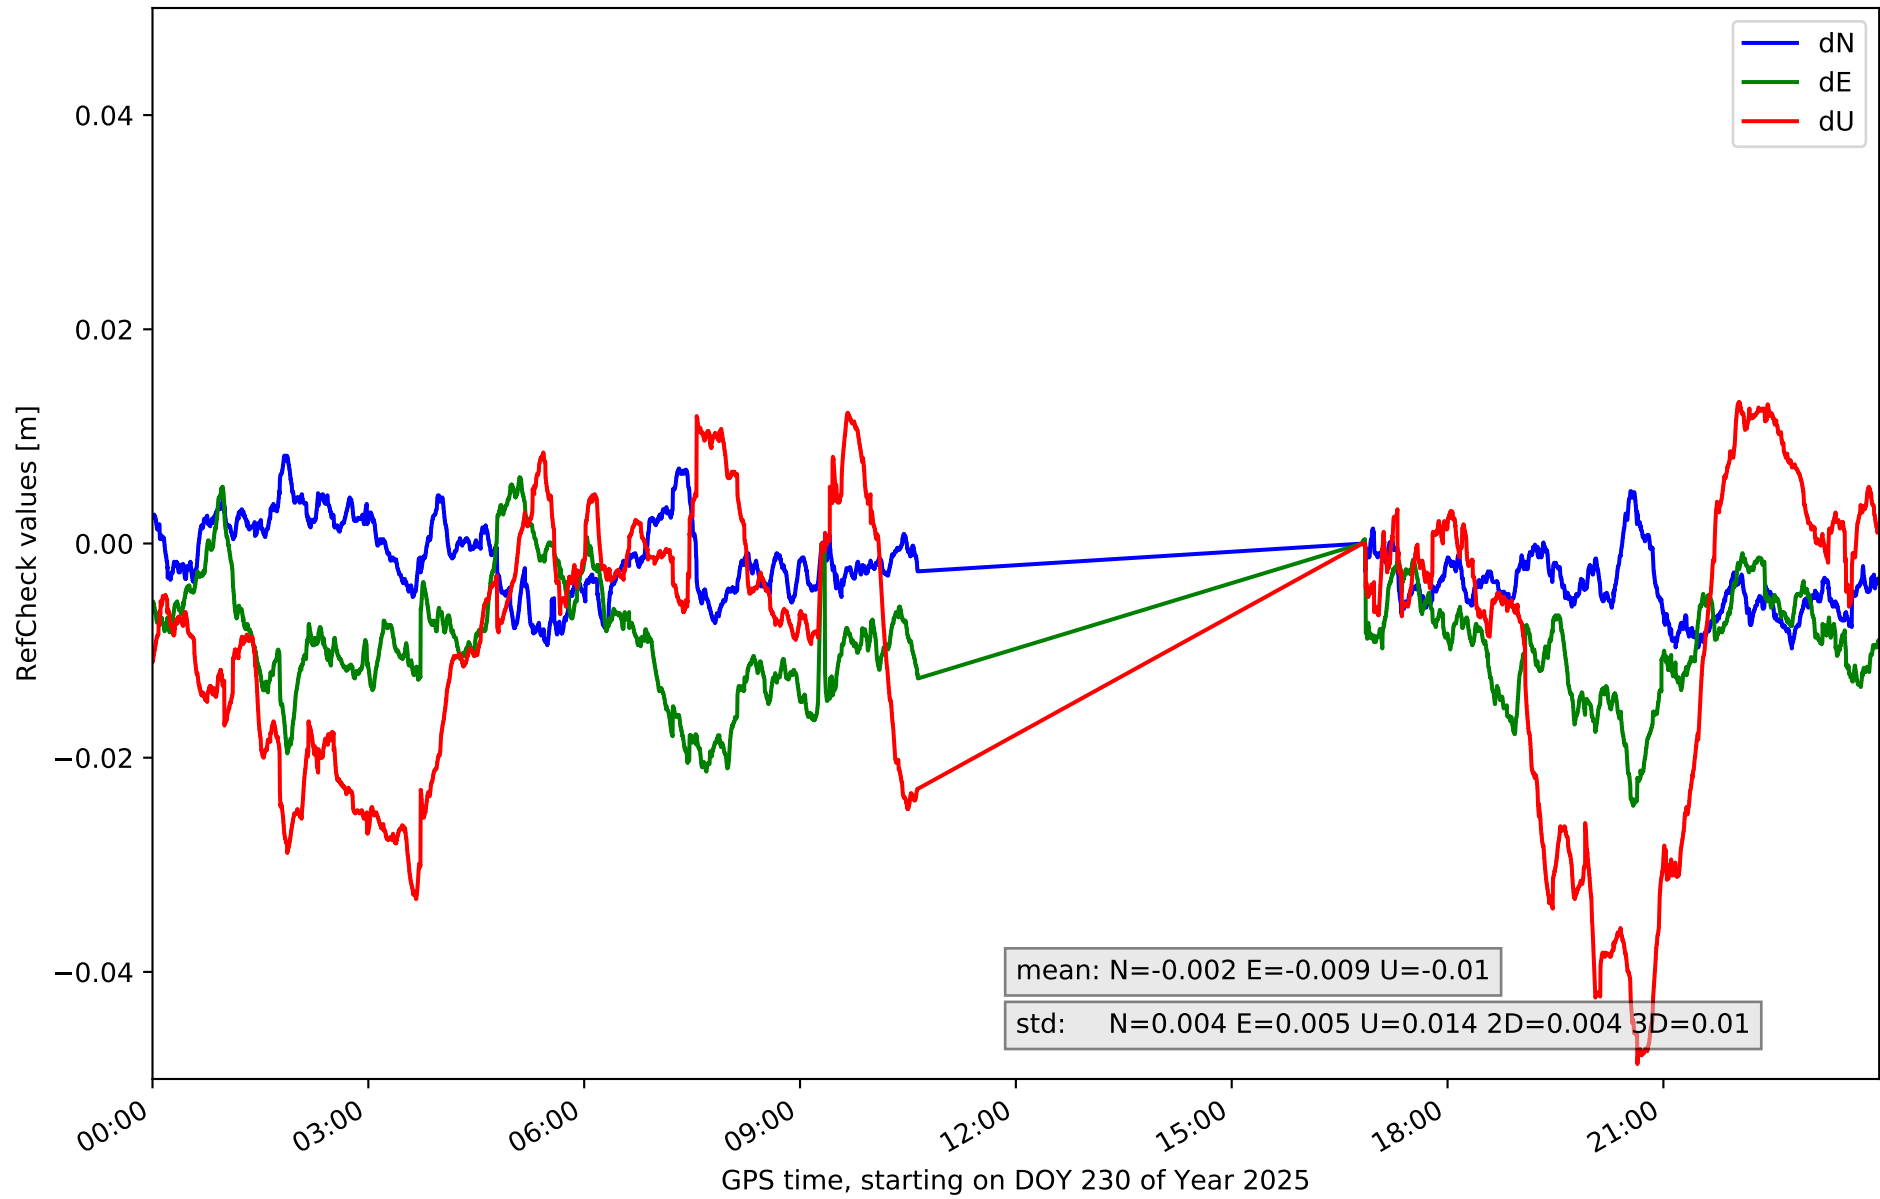


RefCheck for station IZAN in network N32T

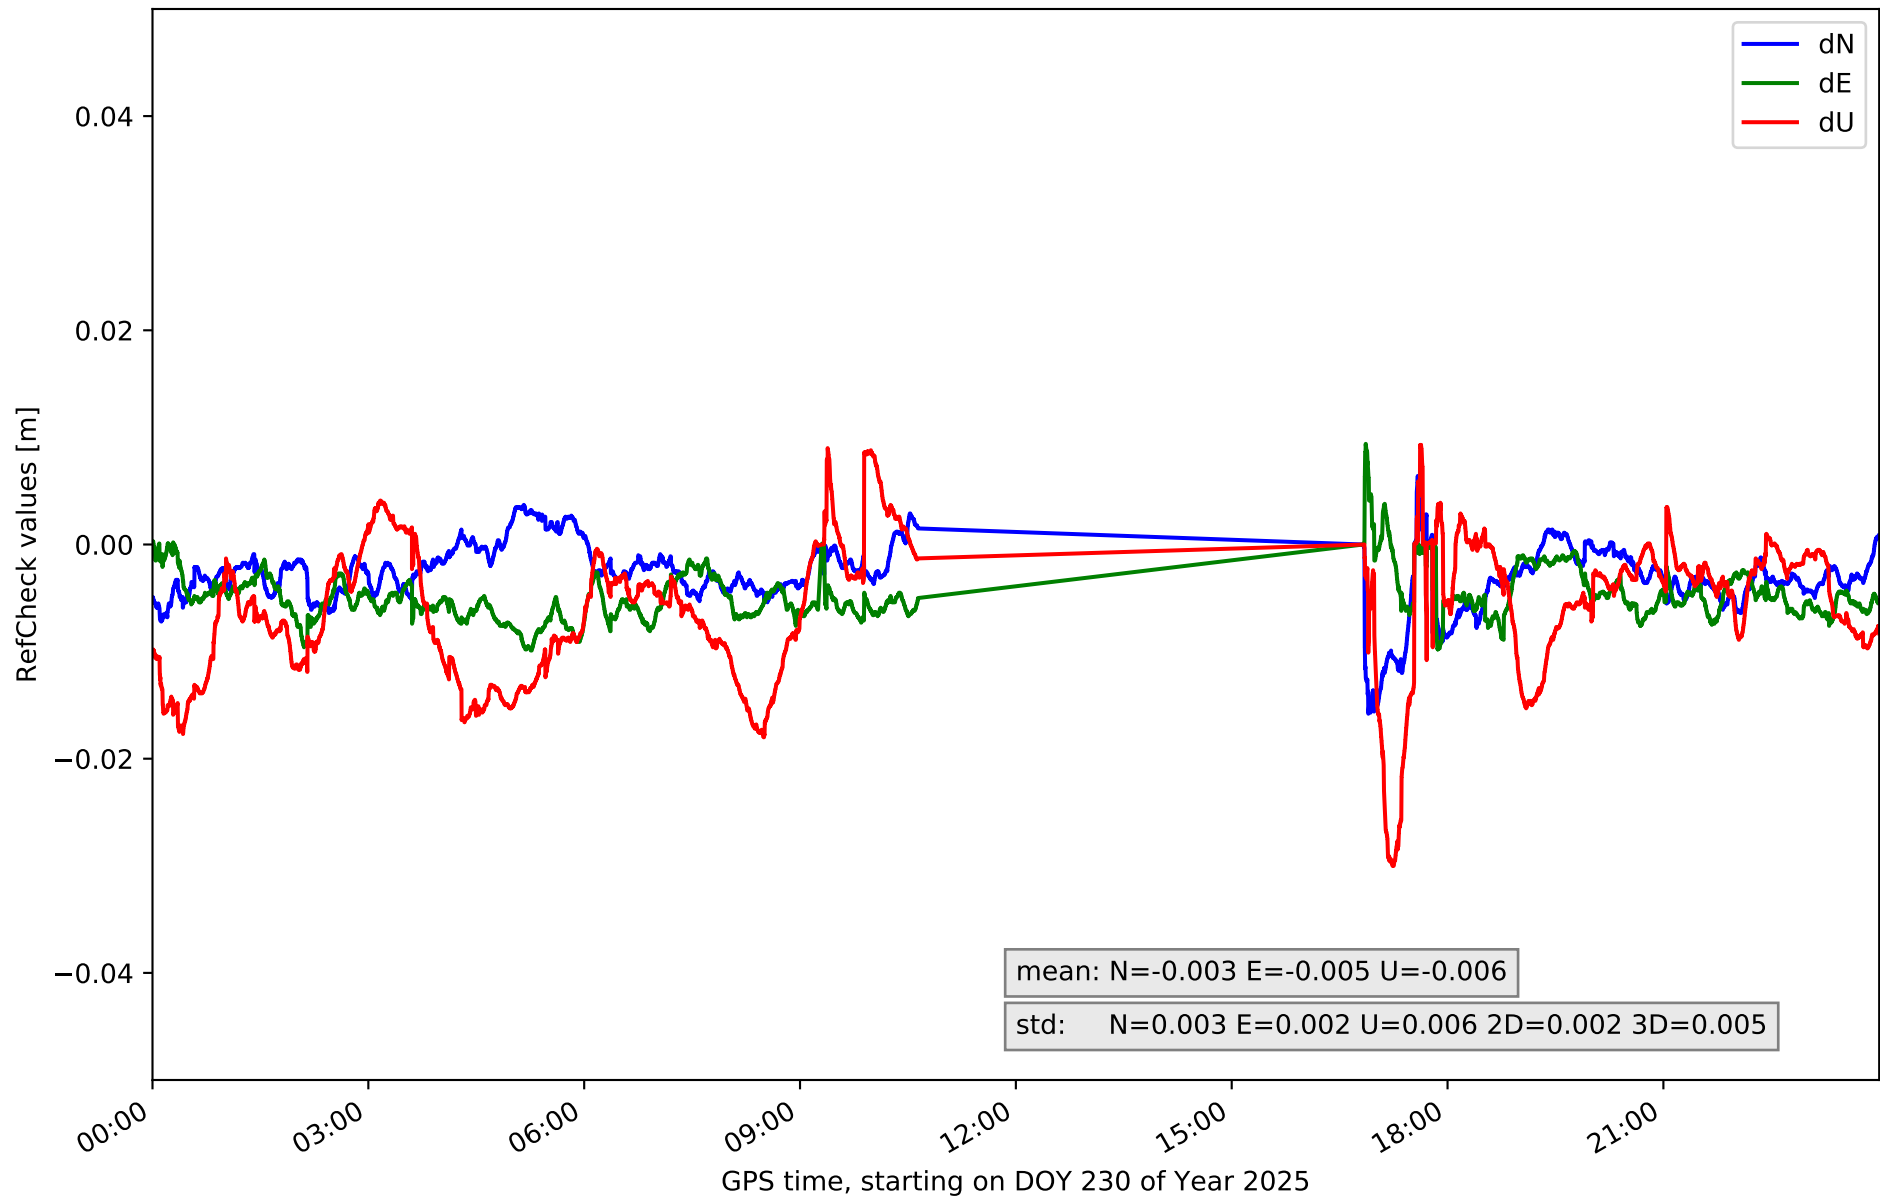


RefCheck for station LP01 in network N32T

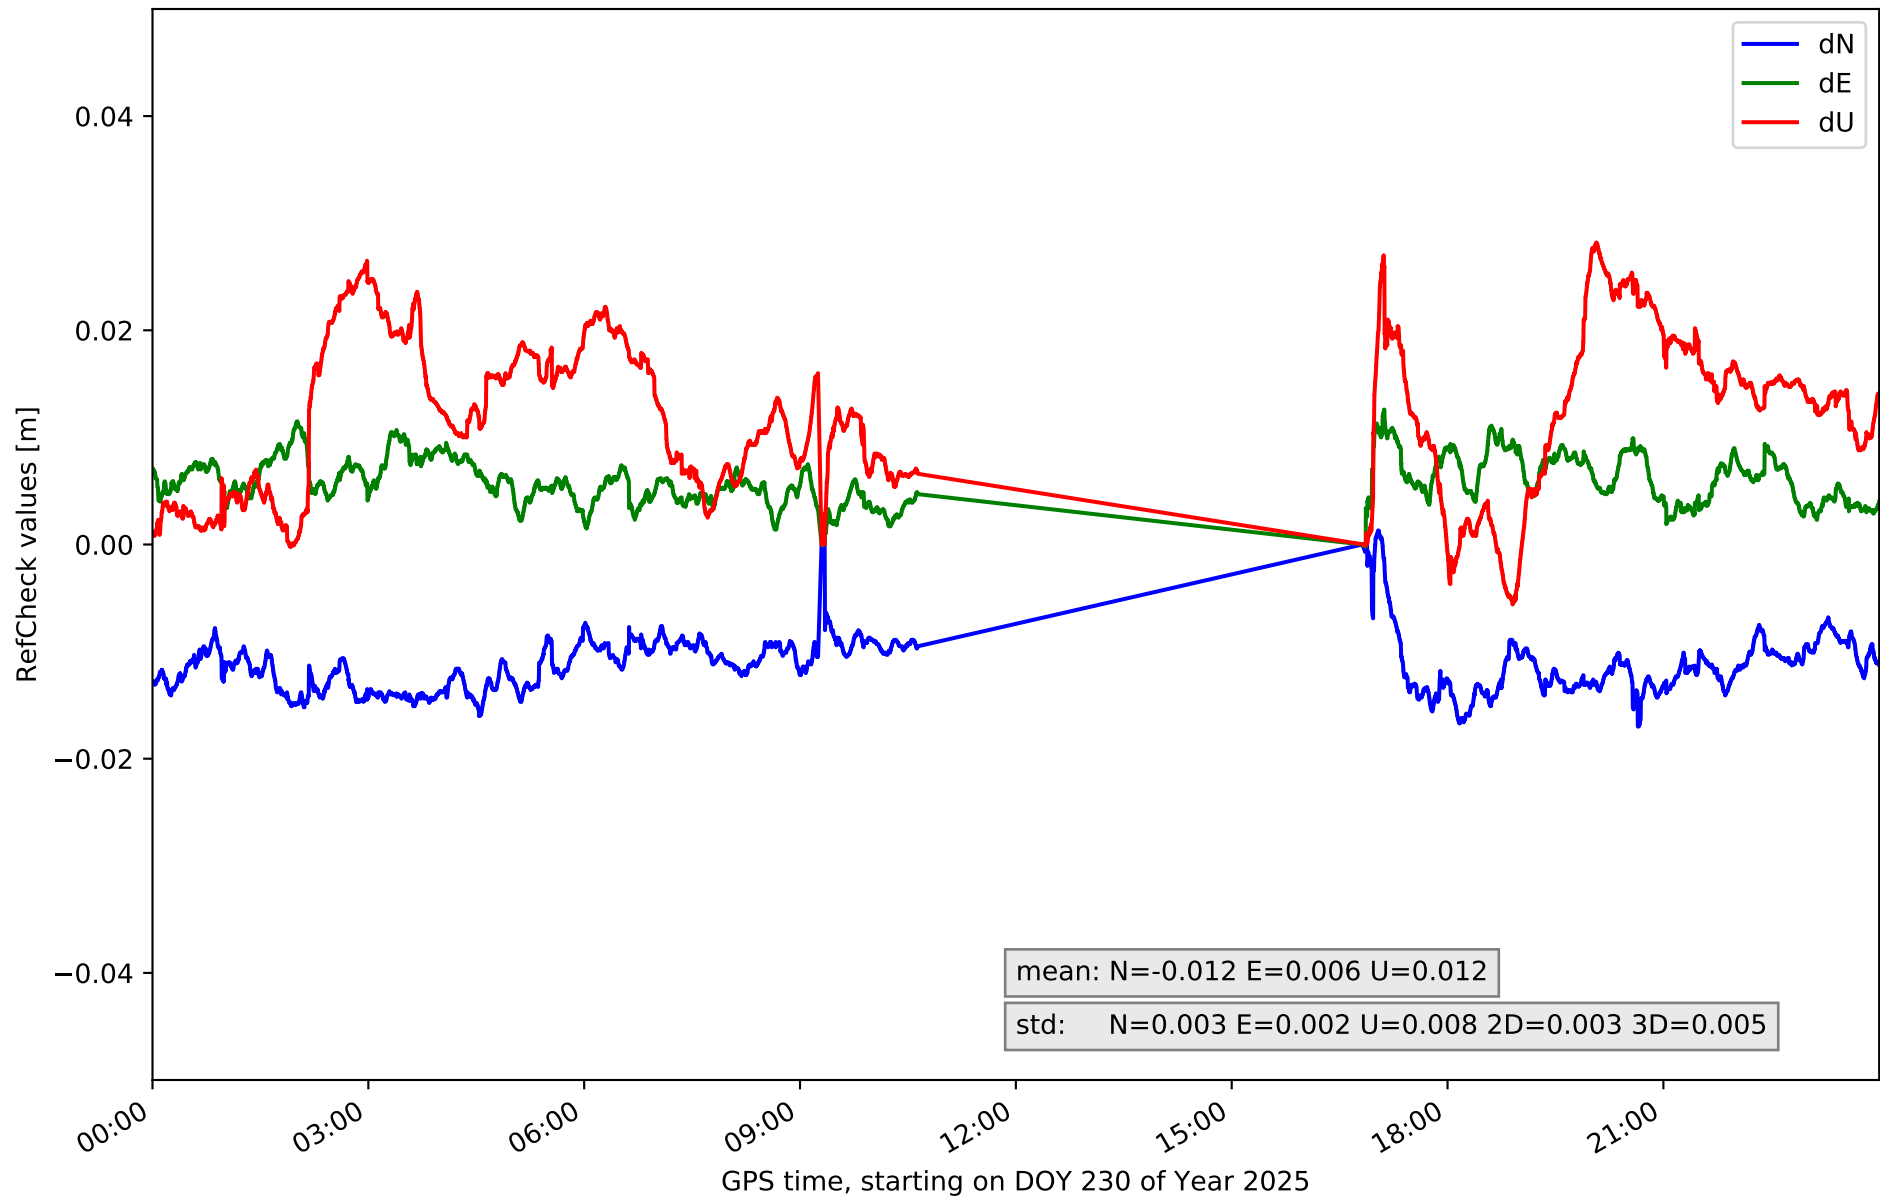


RefCheck for station LP03 in network N32T

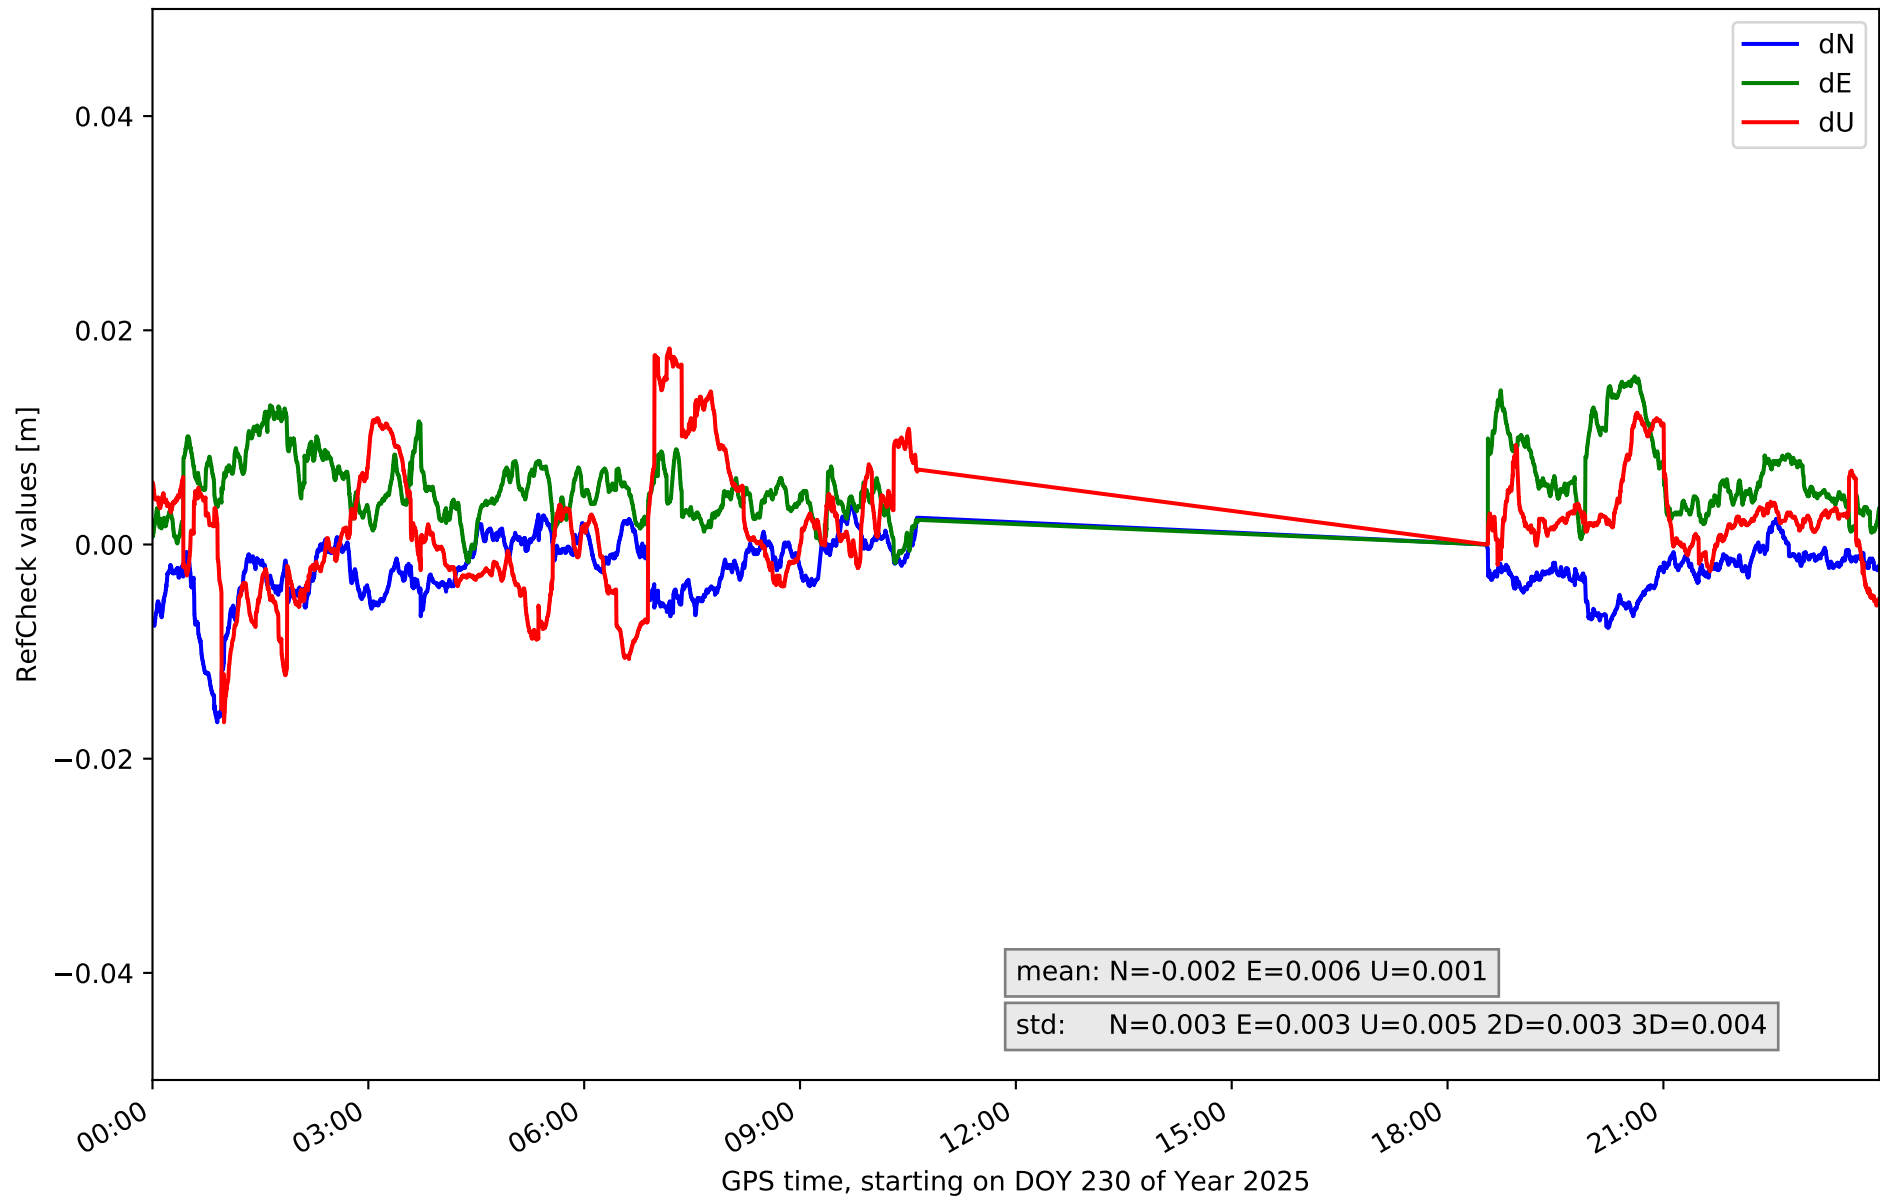


RefCheck for station LPAL in network N32T

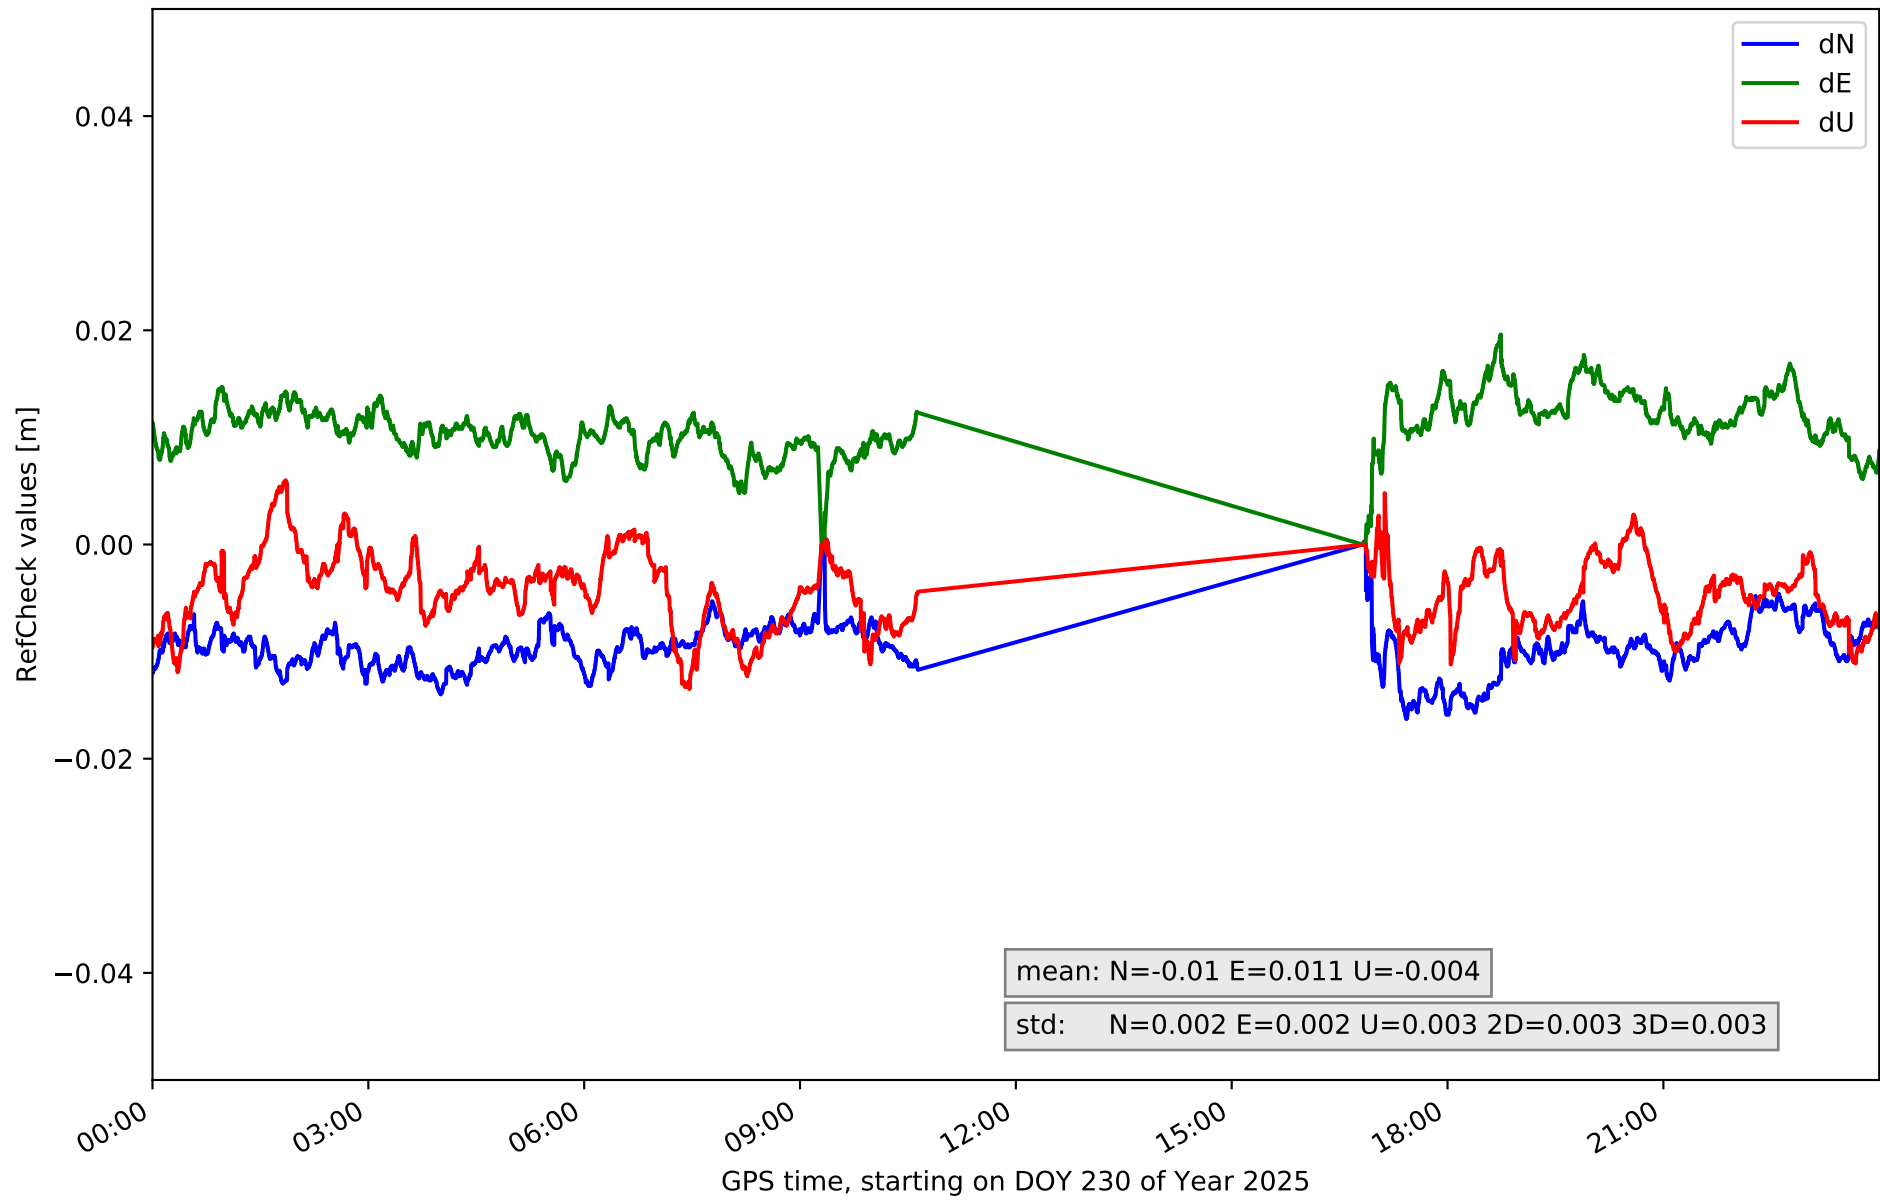


RefCheck for station LRES in network N32T

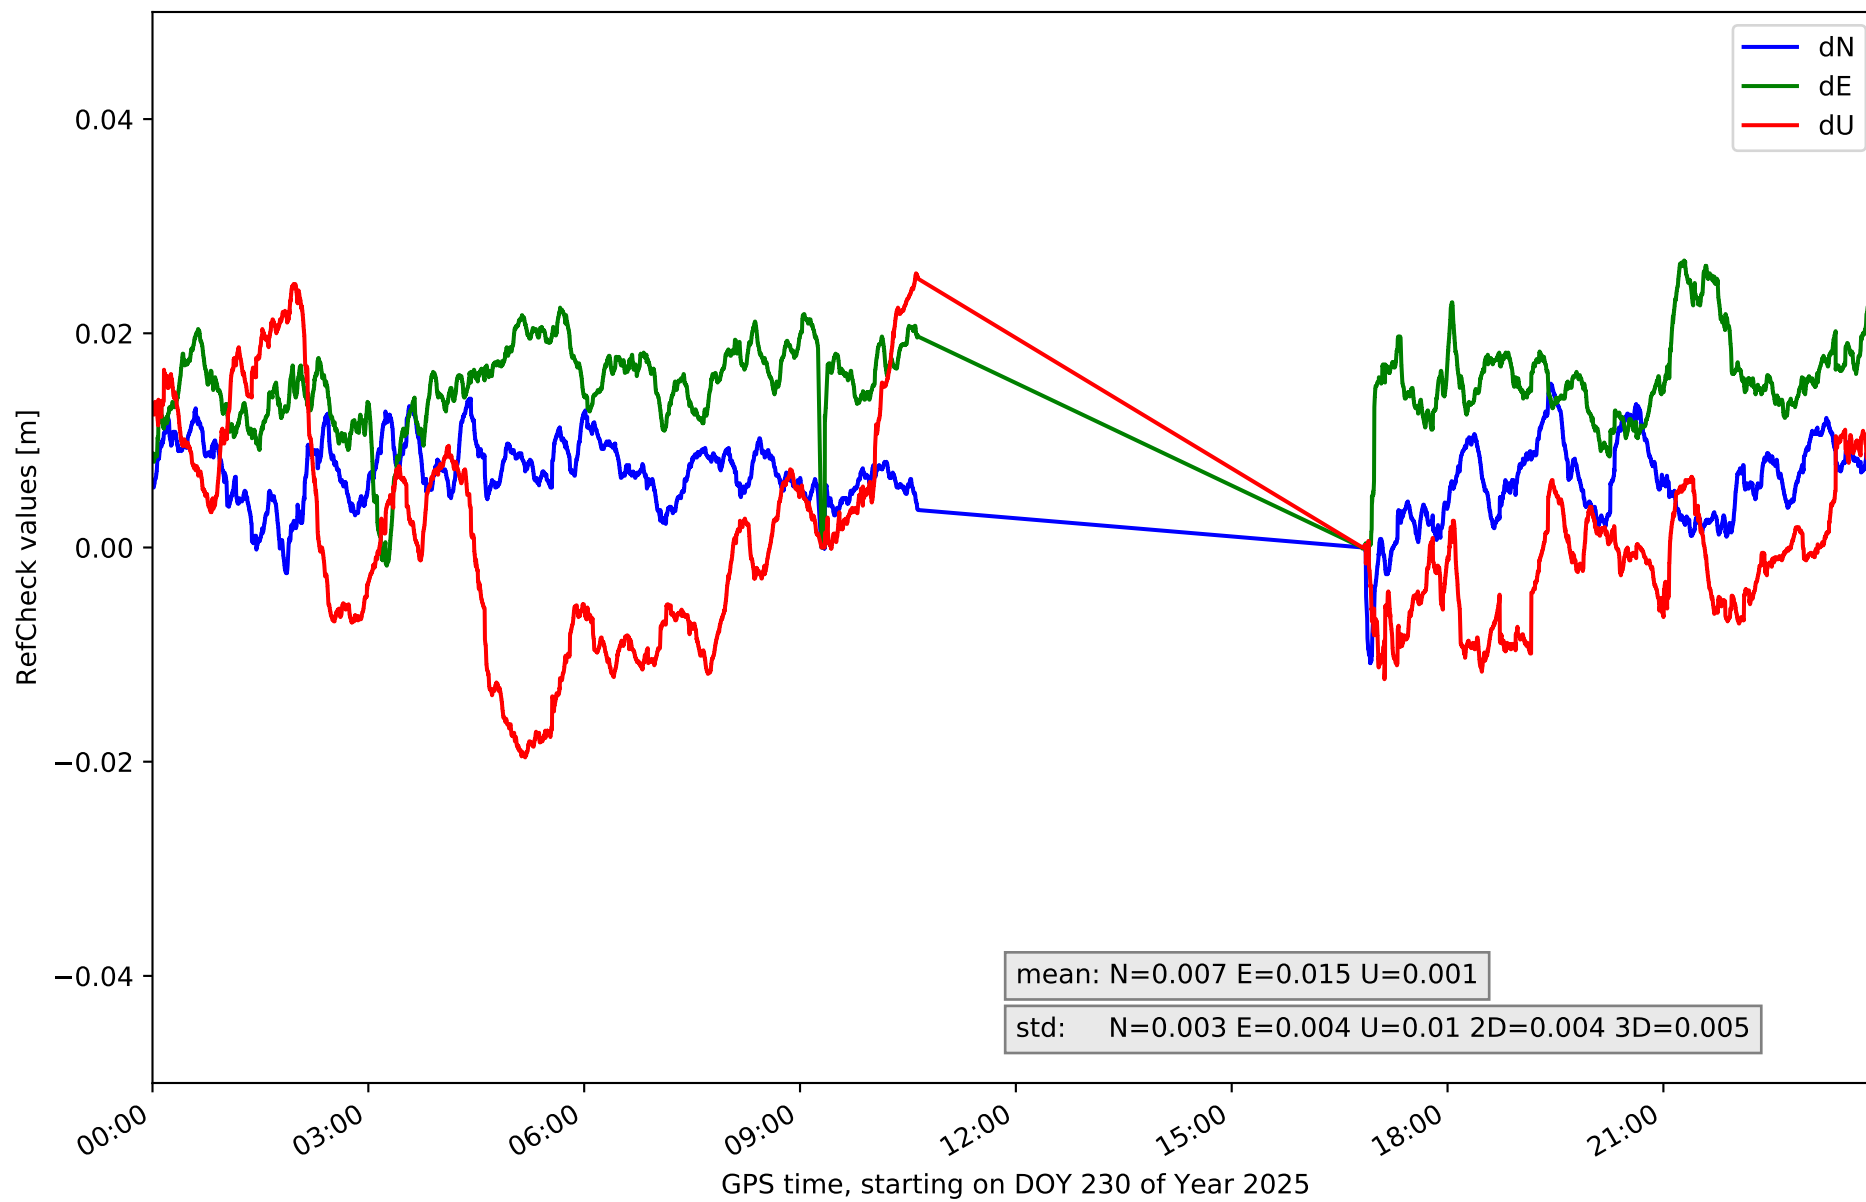


RefCheck for station TN01 in network N32T

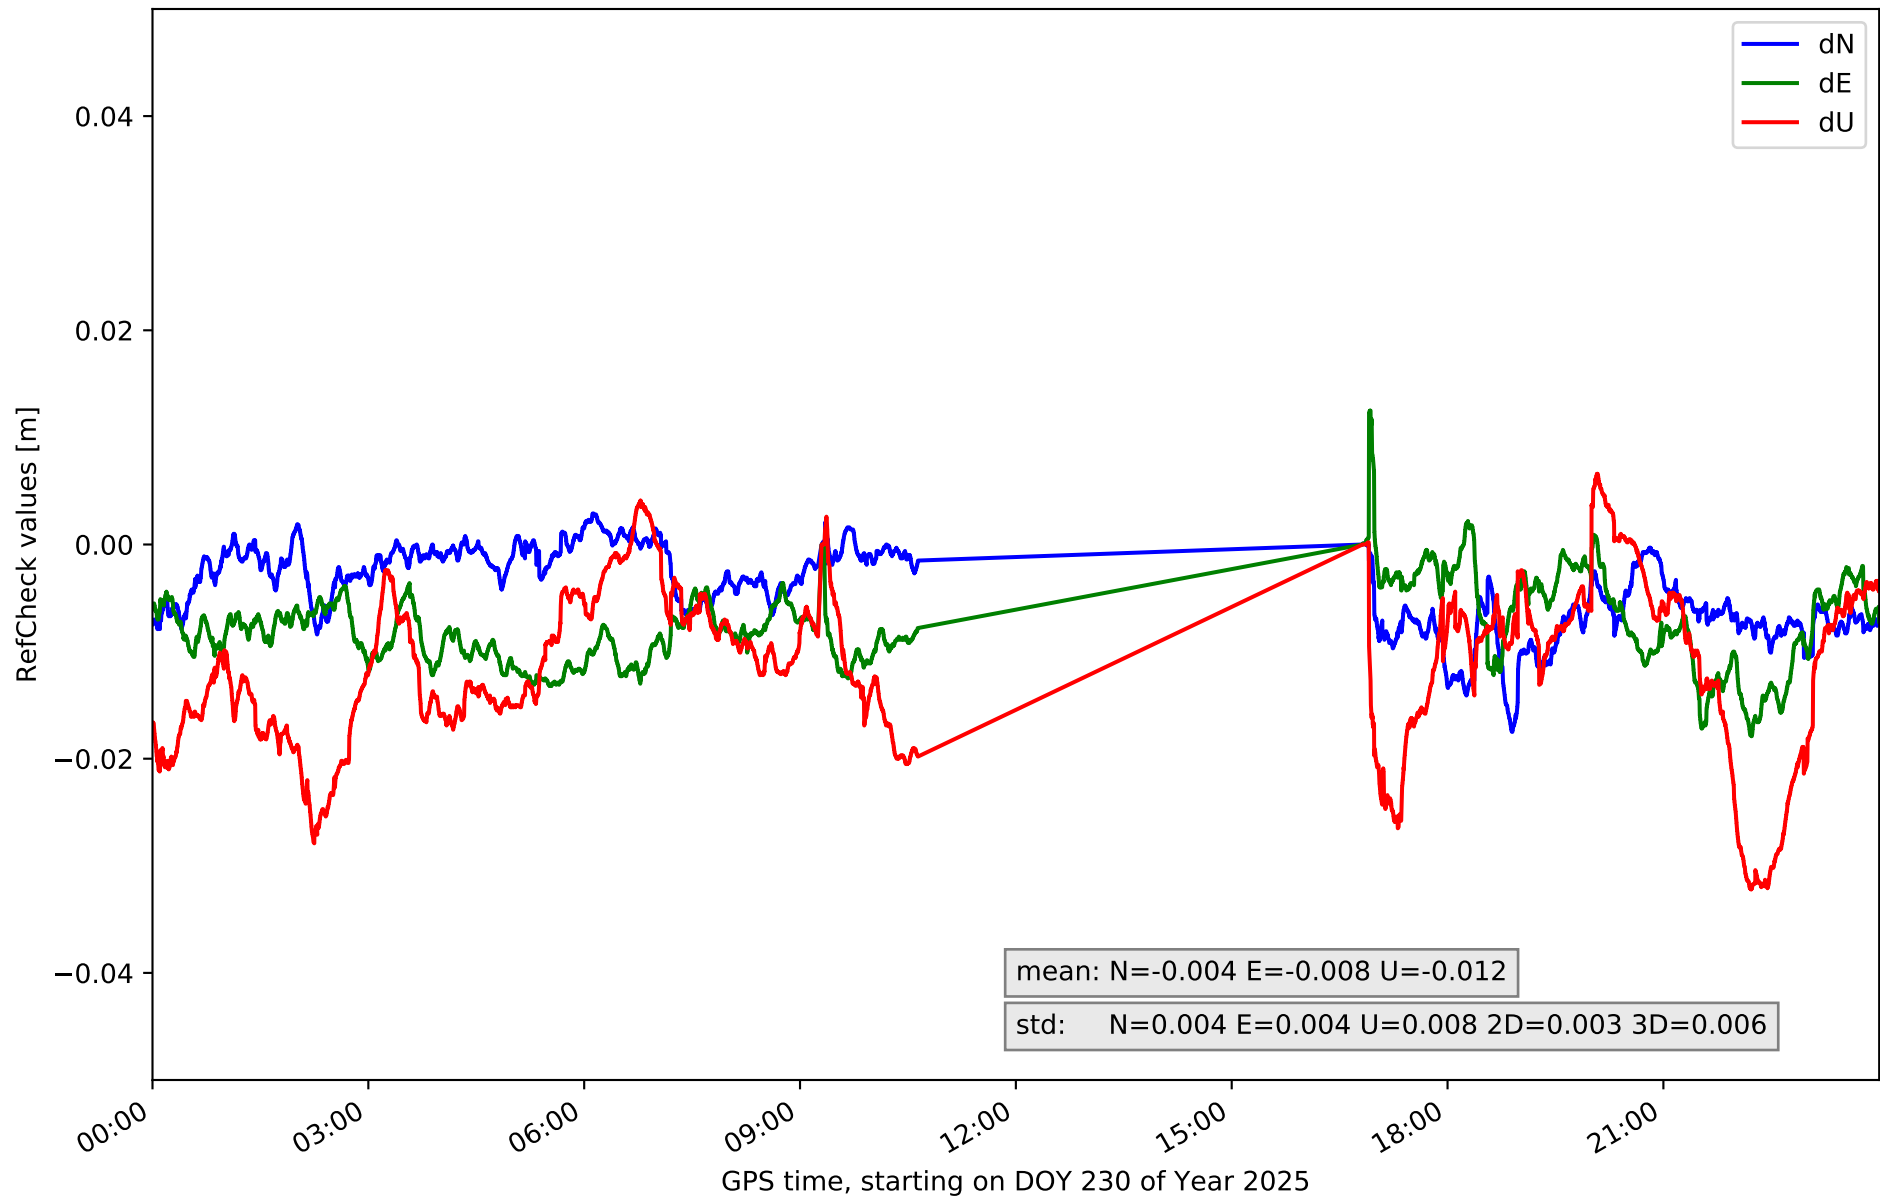


RefCheck for station TN02 in network N32T

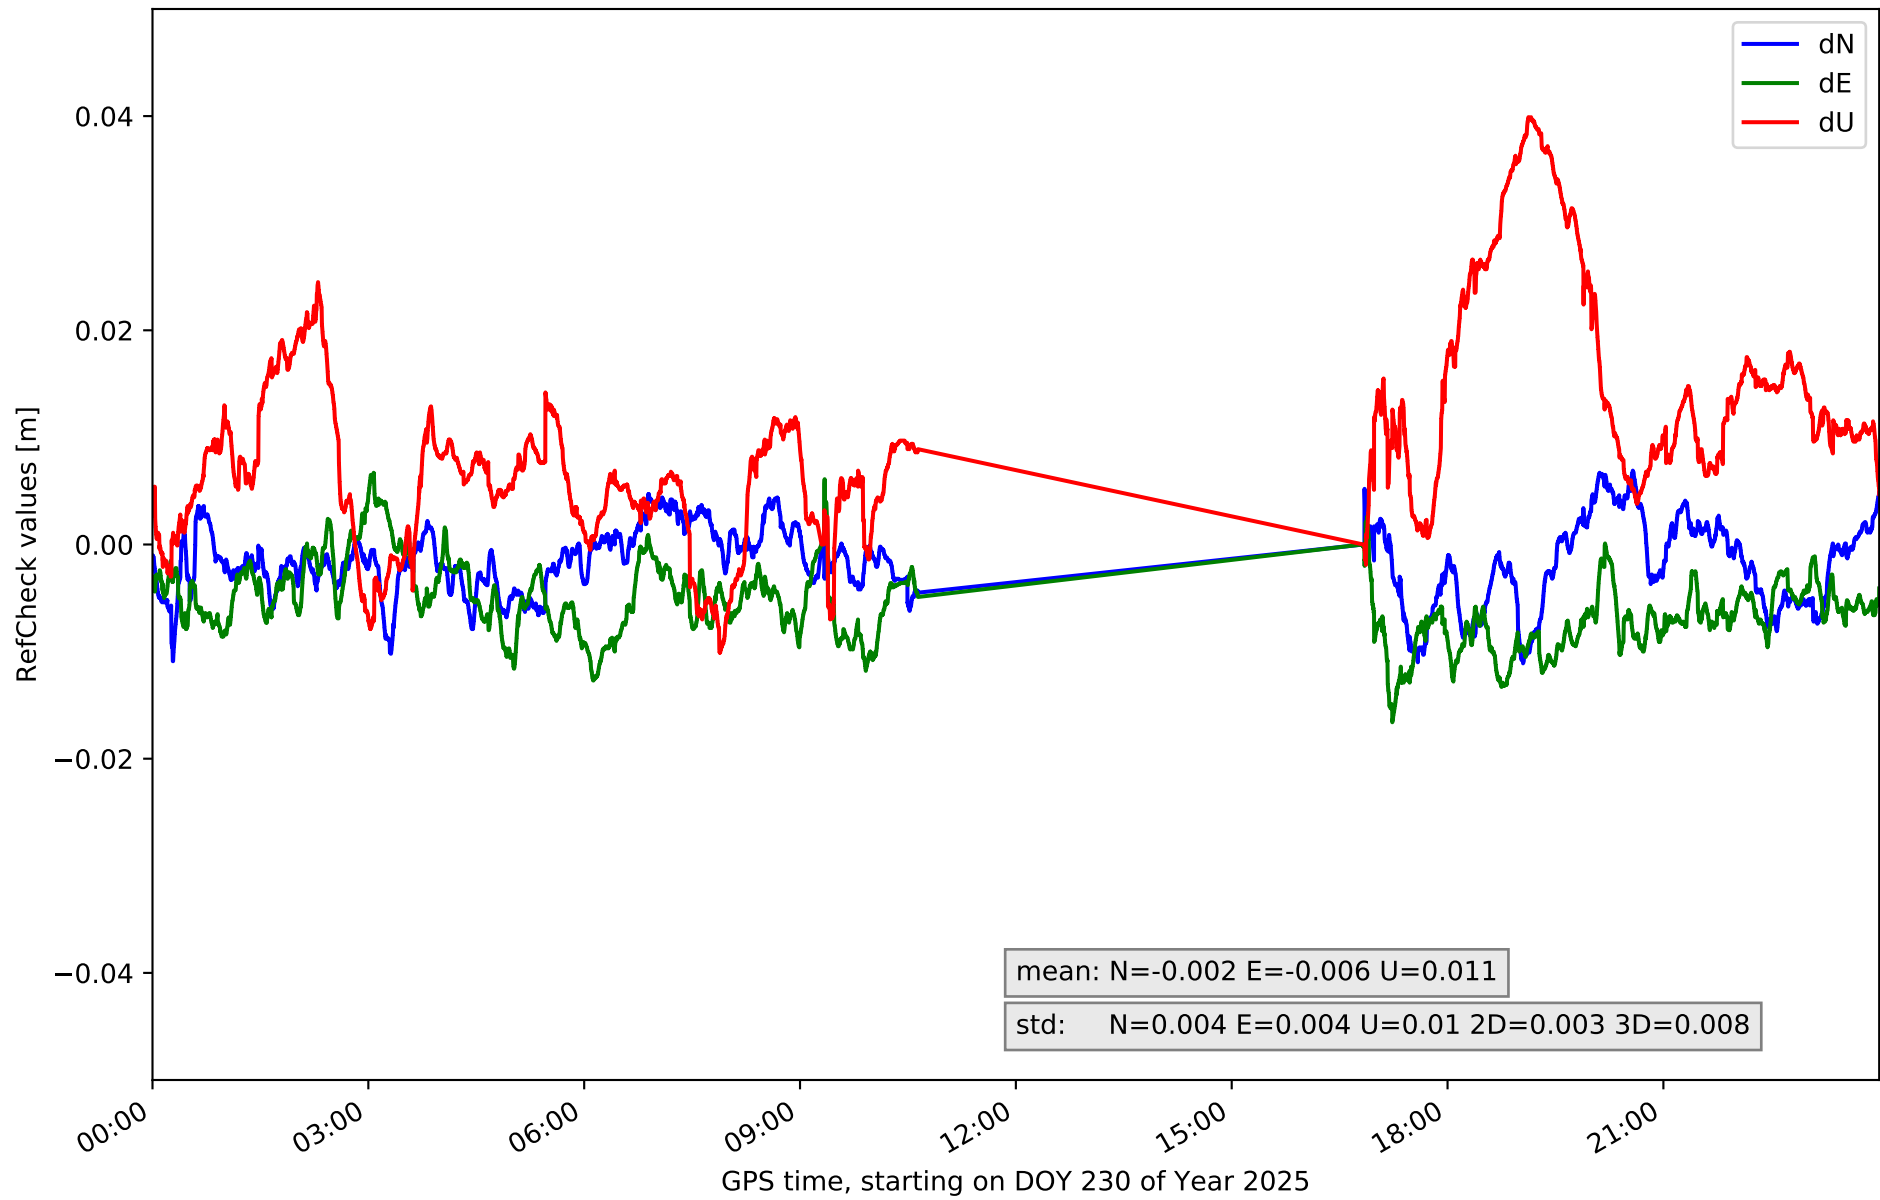


RefCheck for station TN03 in network N32T

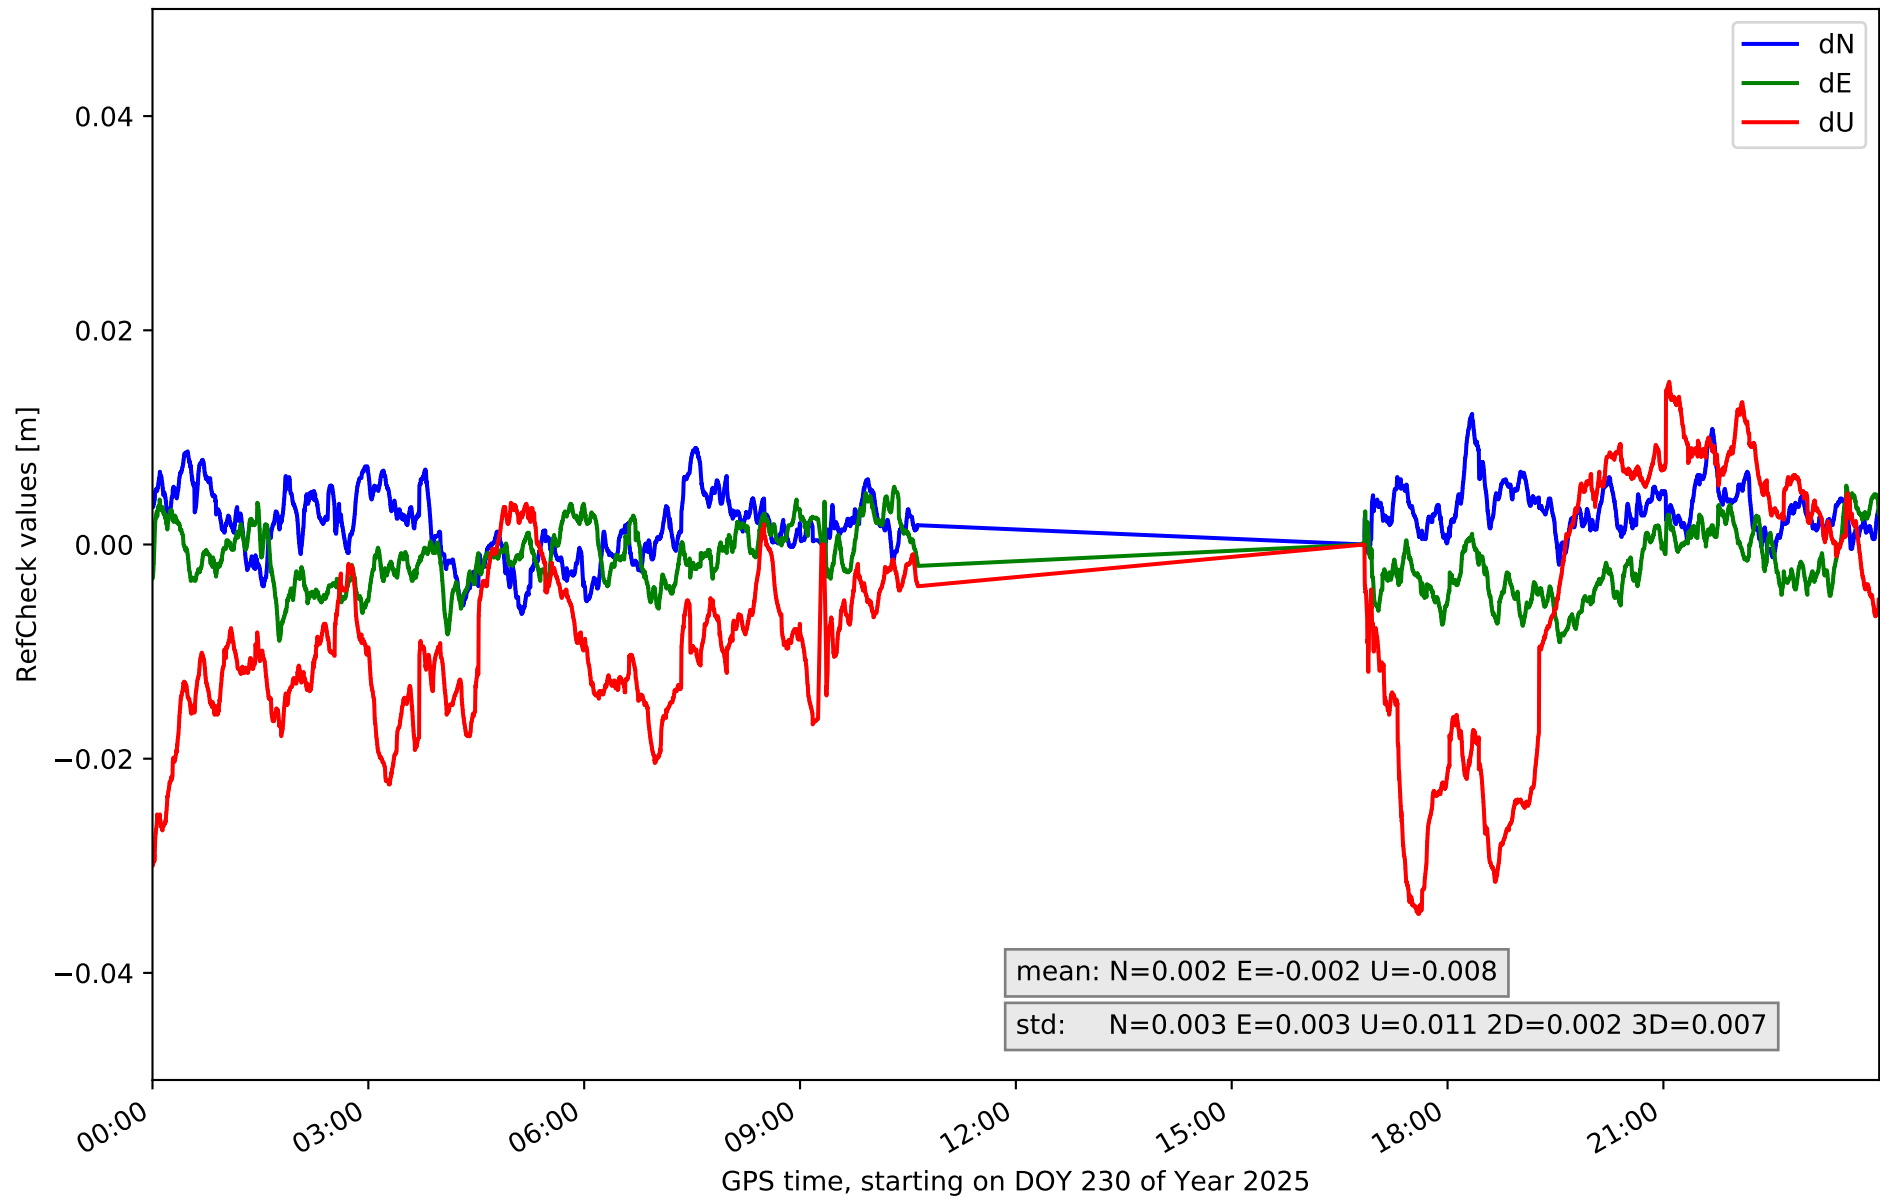


RefCheck for station TN04 in network N32T

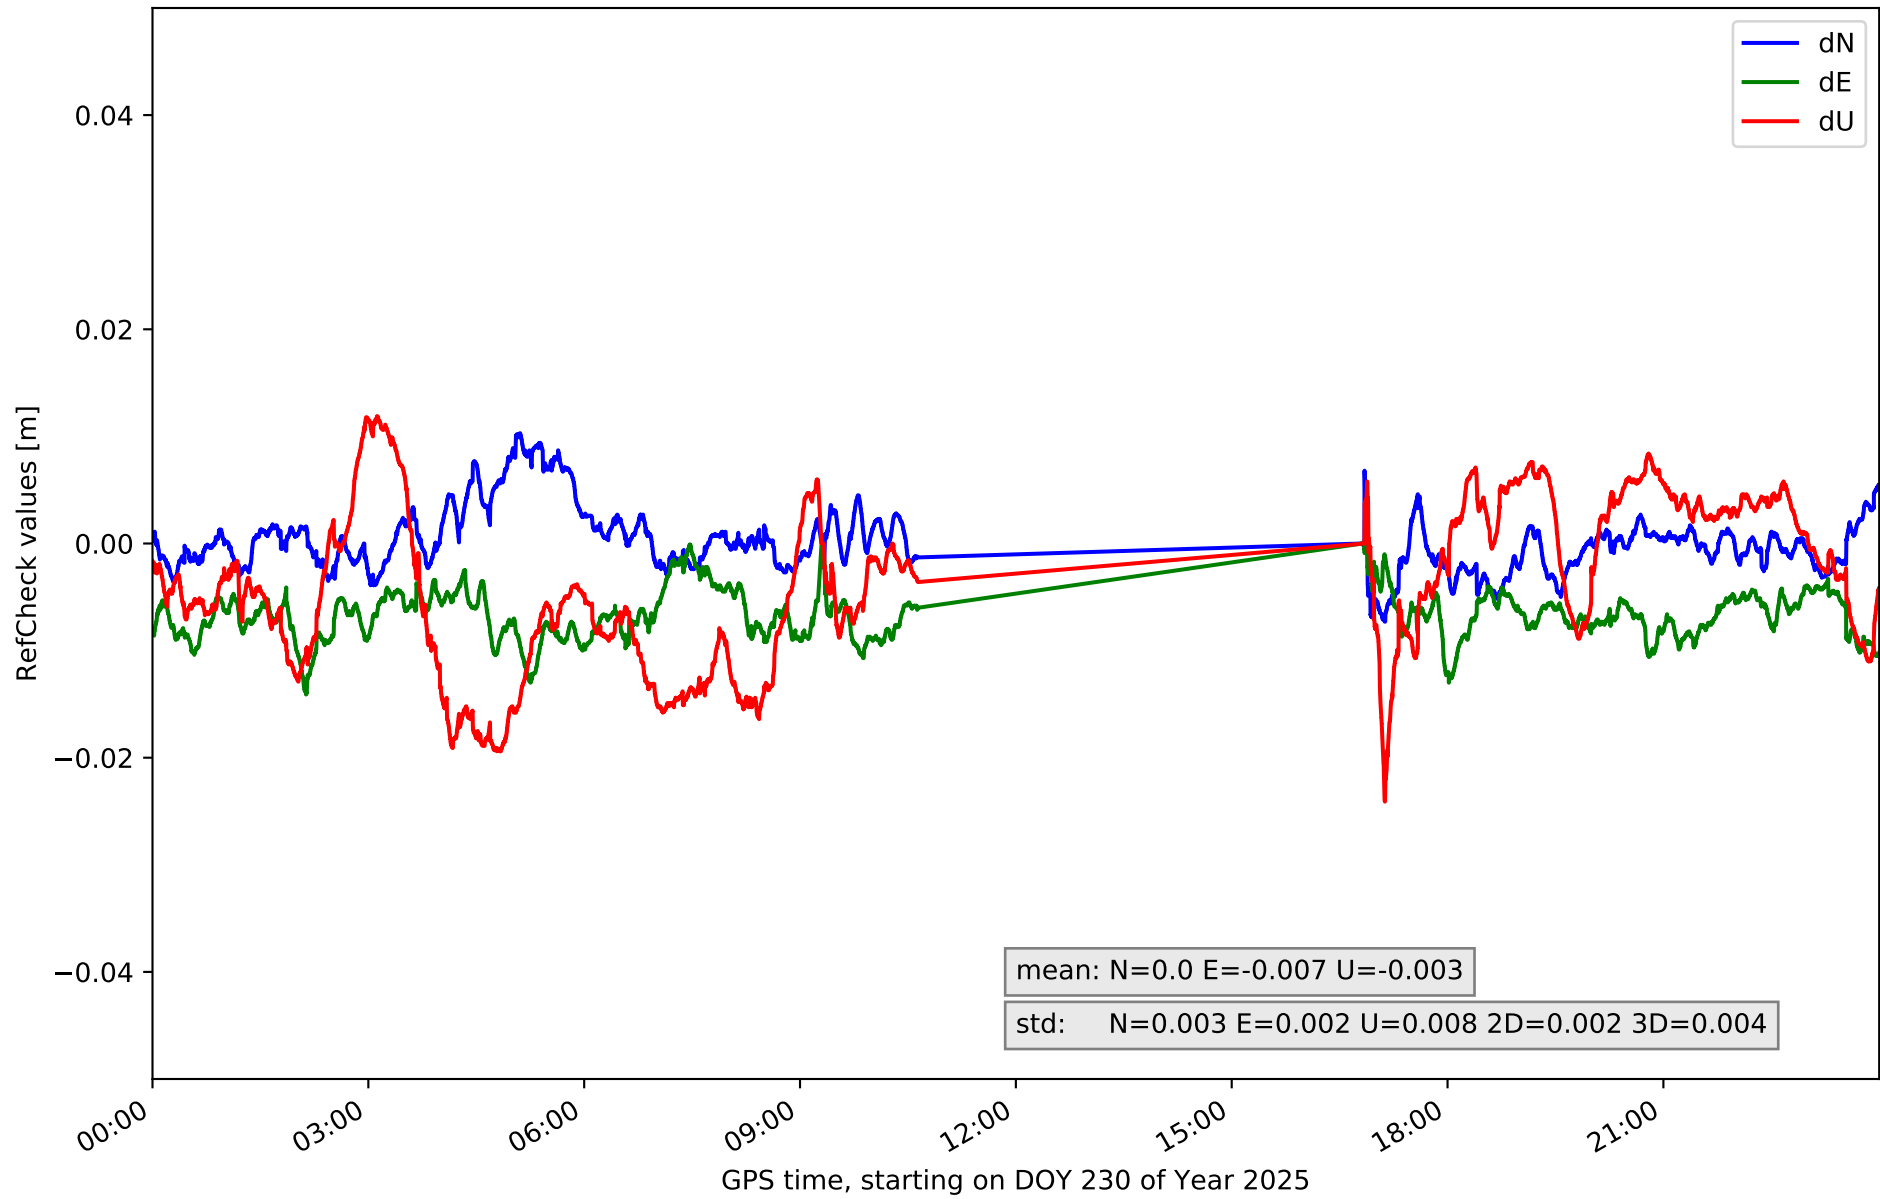


RefCheck for station TN06 in network N32T

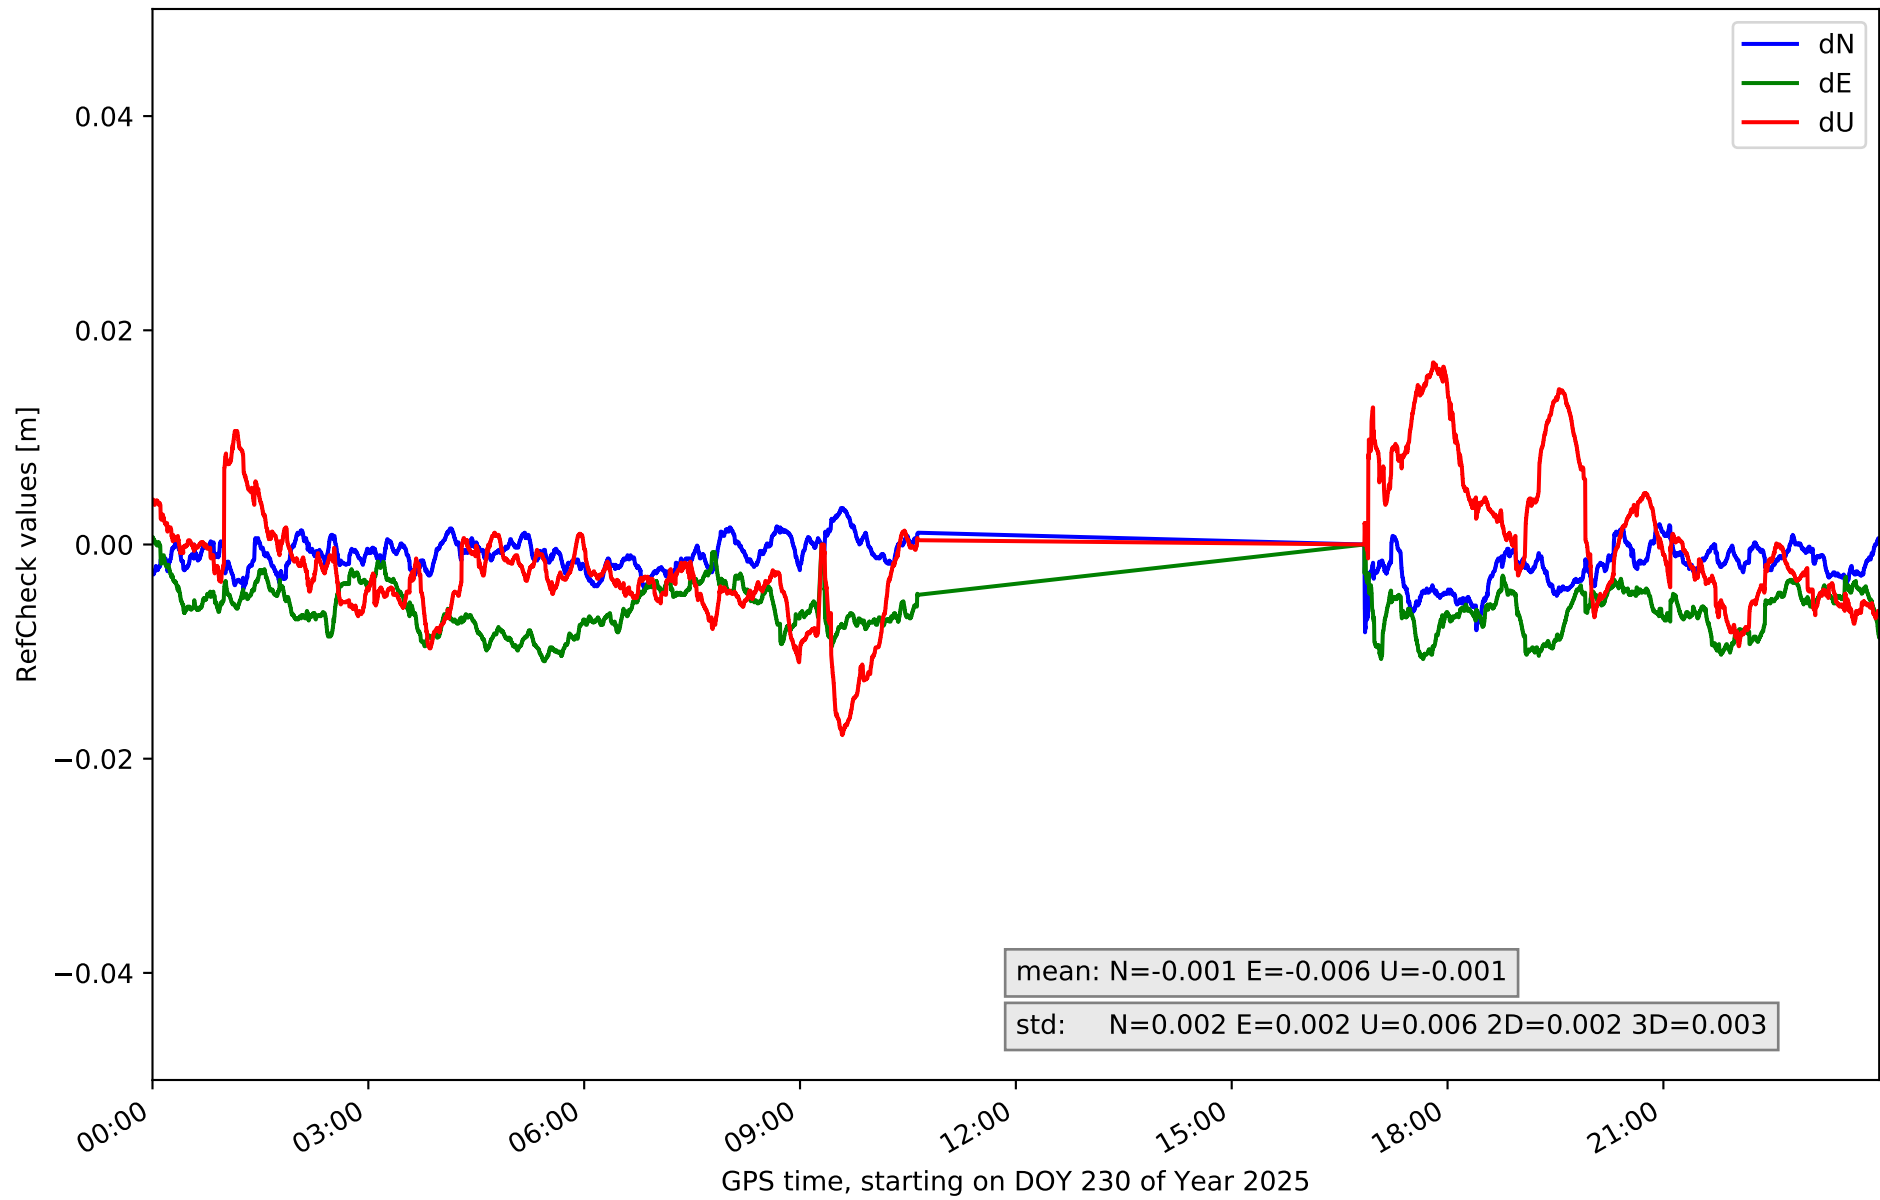

RefCheck for station TN09 in network N32T

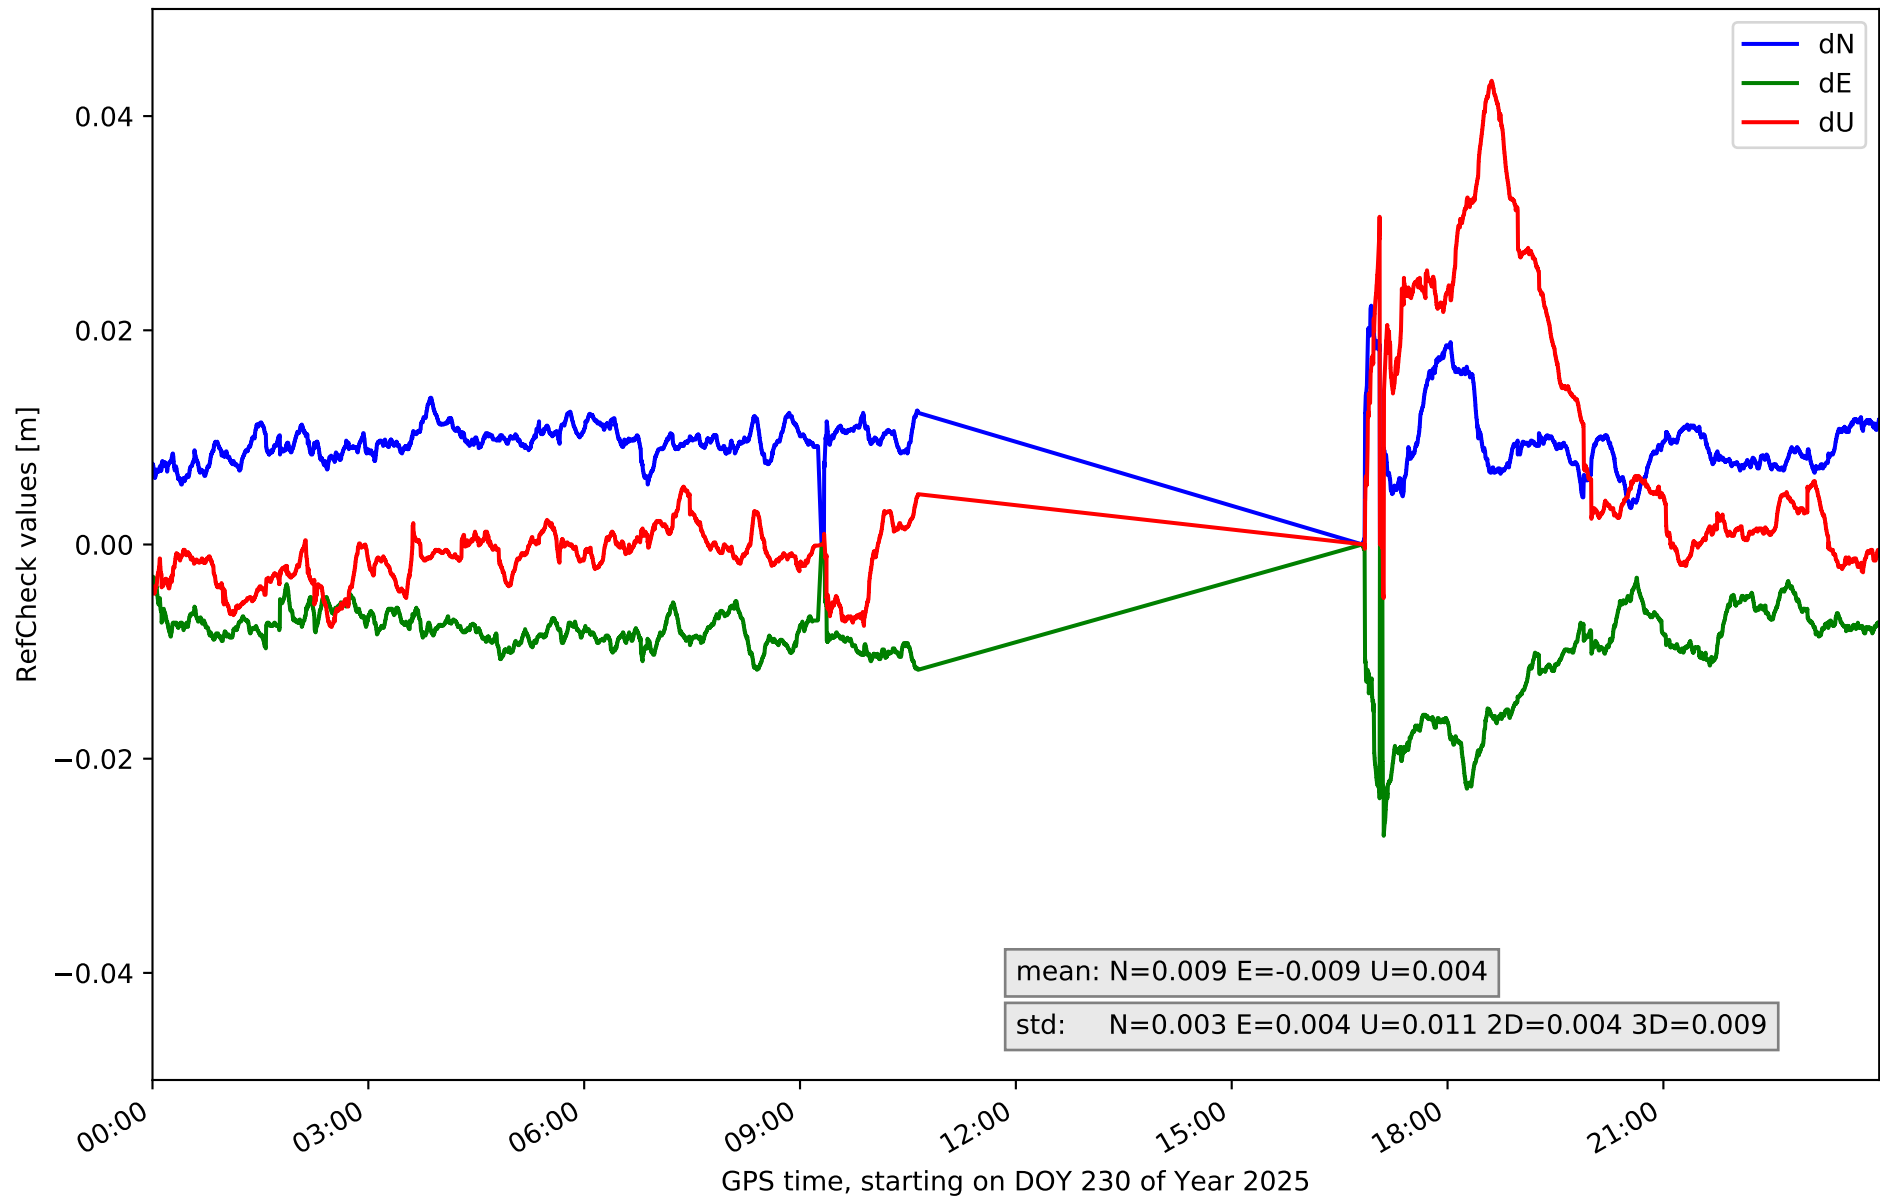

RefCheck for station TE11 in network N32T

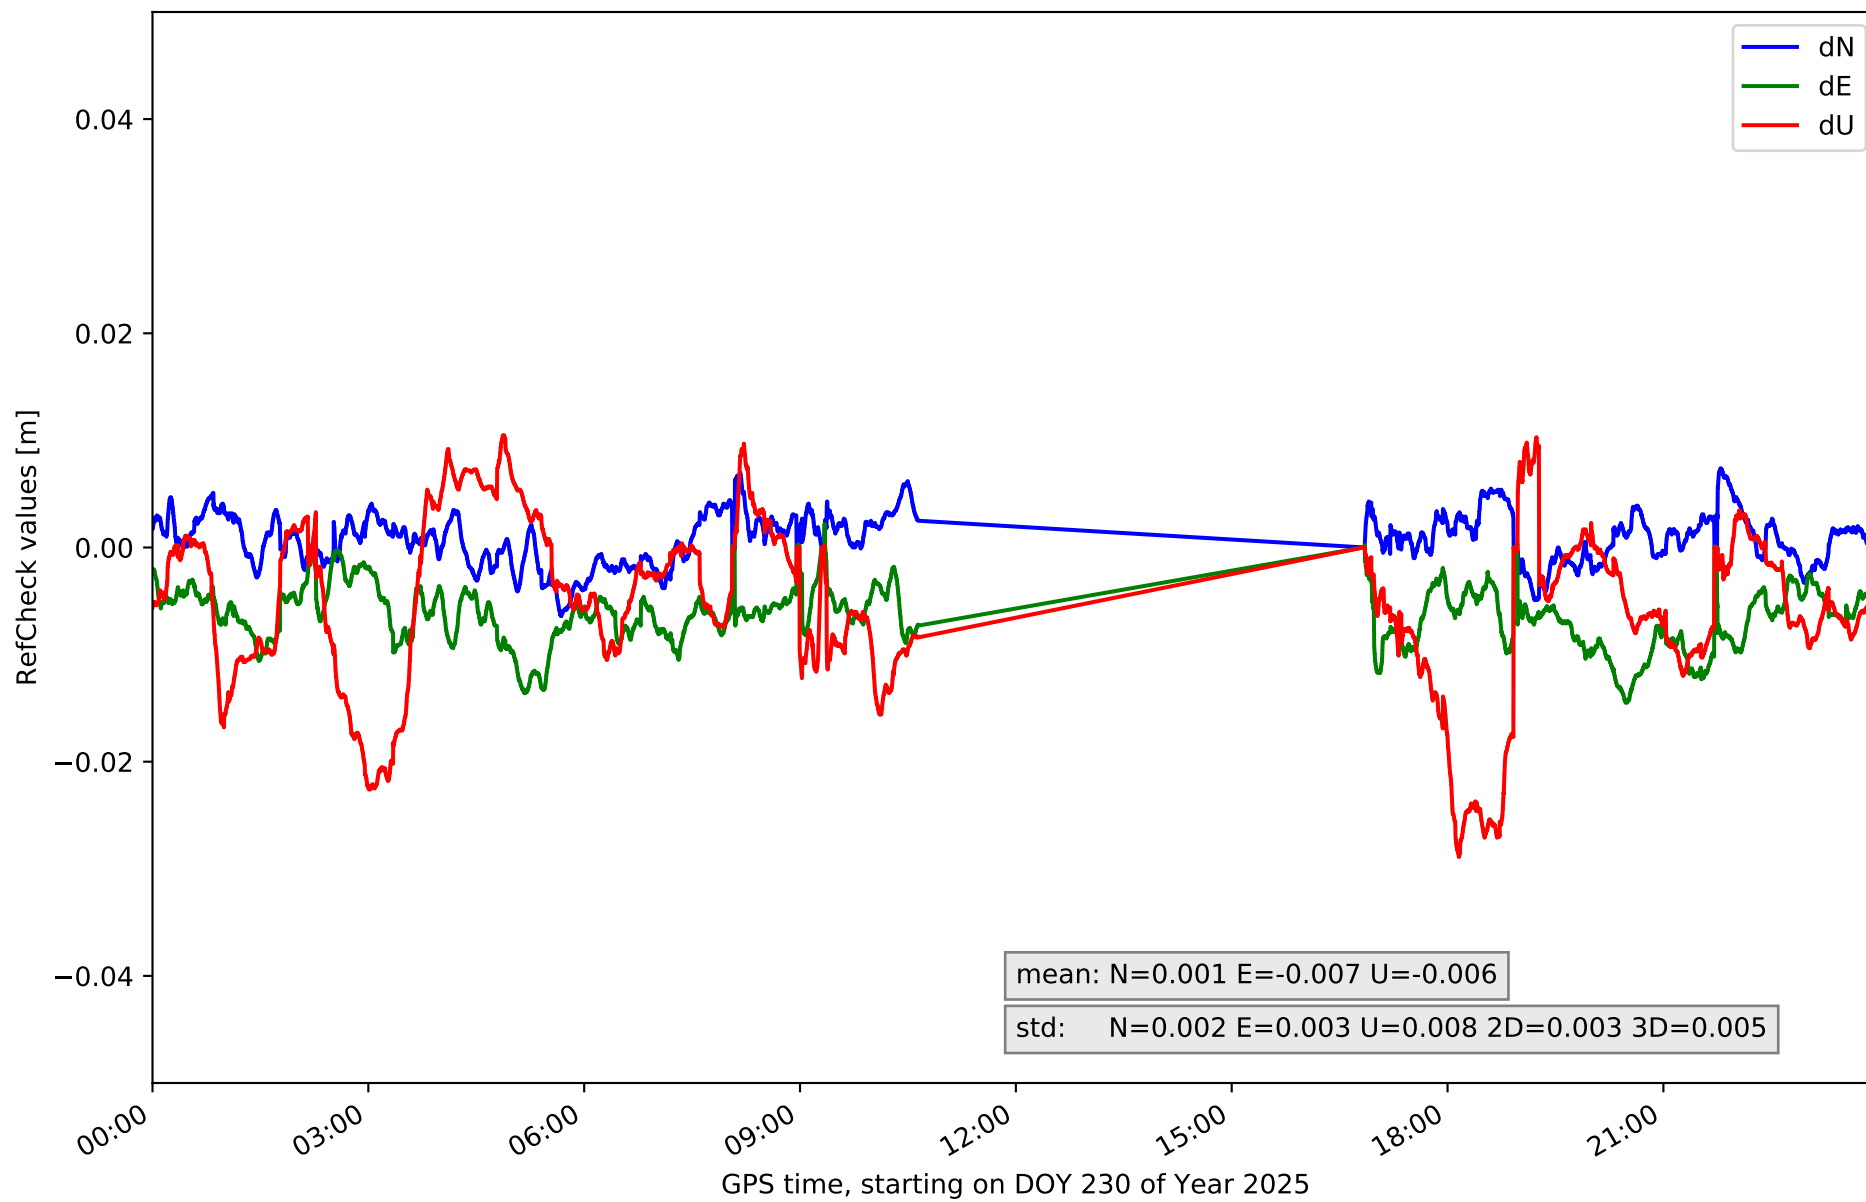

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.018	0.016	0.004	0.0	0.025	0.003	-0.01	0.023	0.007	0.003	0.004	45070	99.1	22722	50.0
EH02	-0.007	0.021	0.004	-0.0	0.026	0.003	-0.025	0.035	0.015	0.003	0.006	45265	99.5	33823	74.4
GOM1	-0.01	0.008	0.004	-0.025	0.006	0.005	-0.049	0.013	0.014	0.004	0.01	21334	46.9	15810	34.8
IZAN	-0.016	0.006	0.003	-0.01	0.009	0.002	-0.03	0.009	0.006	0.002	0.005	2283	5.0	1163	2.6
LP01	-0.017	0.001	0.003	-0.0	0.013	0.002	-0.006	0.028	0.008	0.003	0.005	40995	90.1	17564	38.6
LP03	-0.017	0.004	0.003	-0.002	0.016	0.003	-0.017	0.018	0.005	0.003	0.004	7416	18.2	210	0.5
LPAL	-0.016	0.0	0.002	-0.0	0.02	0.002	-0.013	0.006	0.003	0.003	0.003	44896	98.7	2751	6.0
LRES	-0.011	0.015	0.003	-0.002	0.027	0.004	-0.02	0.026	0.01	0.004	0.005	44344	97.5	19221	42.3
TN01	-0.018	0.003	0.004	-0.018	0.013	0.004	-0.032	0.007	0.008	0.003	0.006	19177	42.2	10196	22.4
TN02	-0.011	0.007	0.004	-0.017	0.007	0.004	-0.01	0.04	0.01	0.003	0.008	8400	18.5	7443	16.4
TN03	-0.006	0.012	0.003	-0.009	0.005	0.003	-0.035	0.015	0.011	0.002	0.007	436	1.0	7029	15.5
TN04	-0.007	0.01	0.003	-0.014	0.001	0.002	-0.024	0.012	0.008	0.002	0.004	5319	11.7	1396	3.1
TN06	-0.008	0.003	0.002	-0.011	0.001	0.002	-0.018	0.017	0.006	0.002	0.003	2323	5.1	2	0.0
TN09	-0.0	0.022	0.003	-0.027	0.0	0.004	-0.008	0.043	0.011	0.004	0.009	39575	87.0	7836	17.2
TE11	-0.006	0.007	0.002	-0.015	0.002	0.003	-0.029	0.011	0.008	0.003	0.005	6290	13.8	3986	8.8
Mean	-0.011	0.009	0.003	-0.01	0.011	0.003	-0.022	0.02	0.009	0.003	0.006	22208.2	49.0	10076.8	22.2
Min/Max	-0.018	0.022	0.004	-0.027	0.027	0.005	-0.049	0.043	0.015	0.004	0.01	45265	99.5	33823	74.4

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	92.8	93.7	92.9	93.5	91.1
considering satellites with dual-frequency fixed	91.7	92.6	91.0	91.9	90.5
considering all signals separately	91.4	92.4	91.0	92.2	88.4