

summary for network NT32

timeperiod chosen: from 2025-08-18-00:00:00 until 2025-08-18-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.3 seconds


average fixing percentage with threshold set to 0.3: 92.7 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

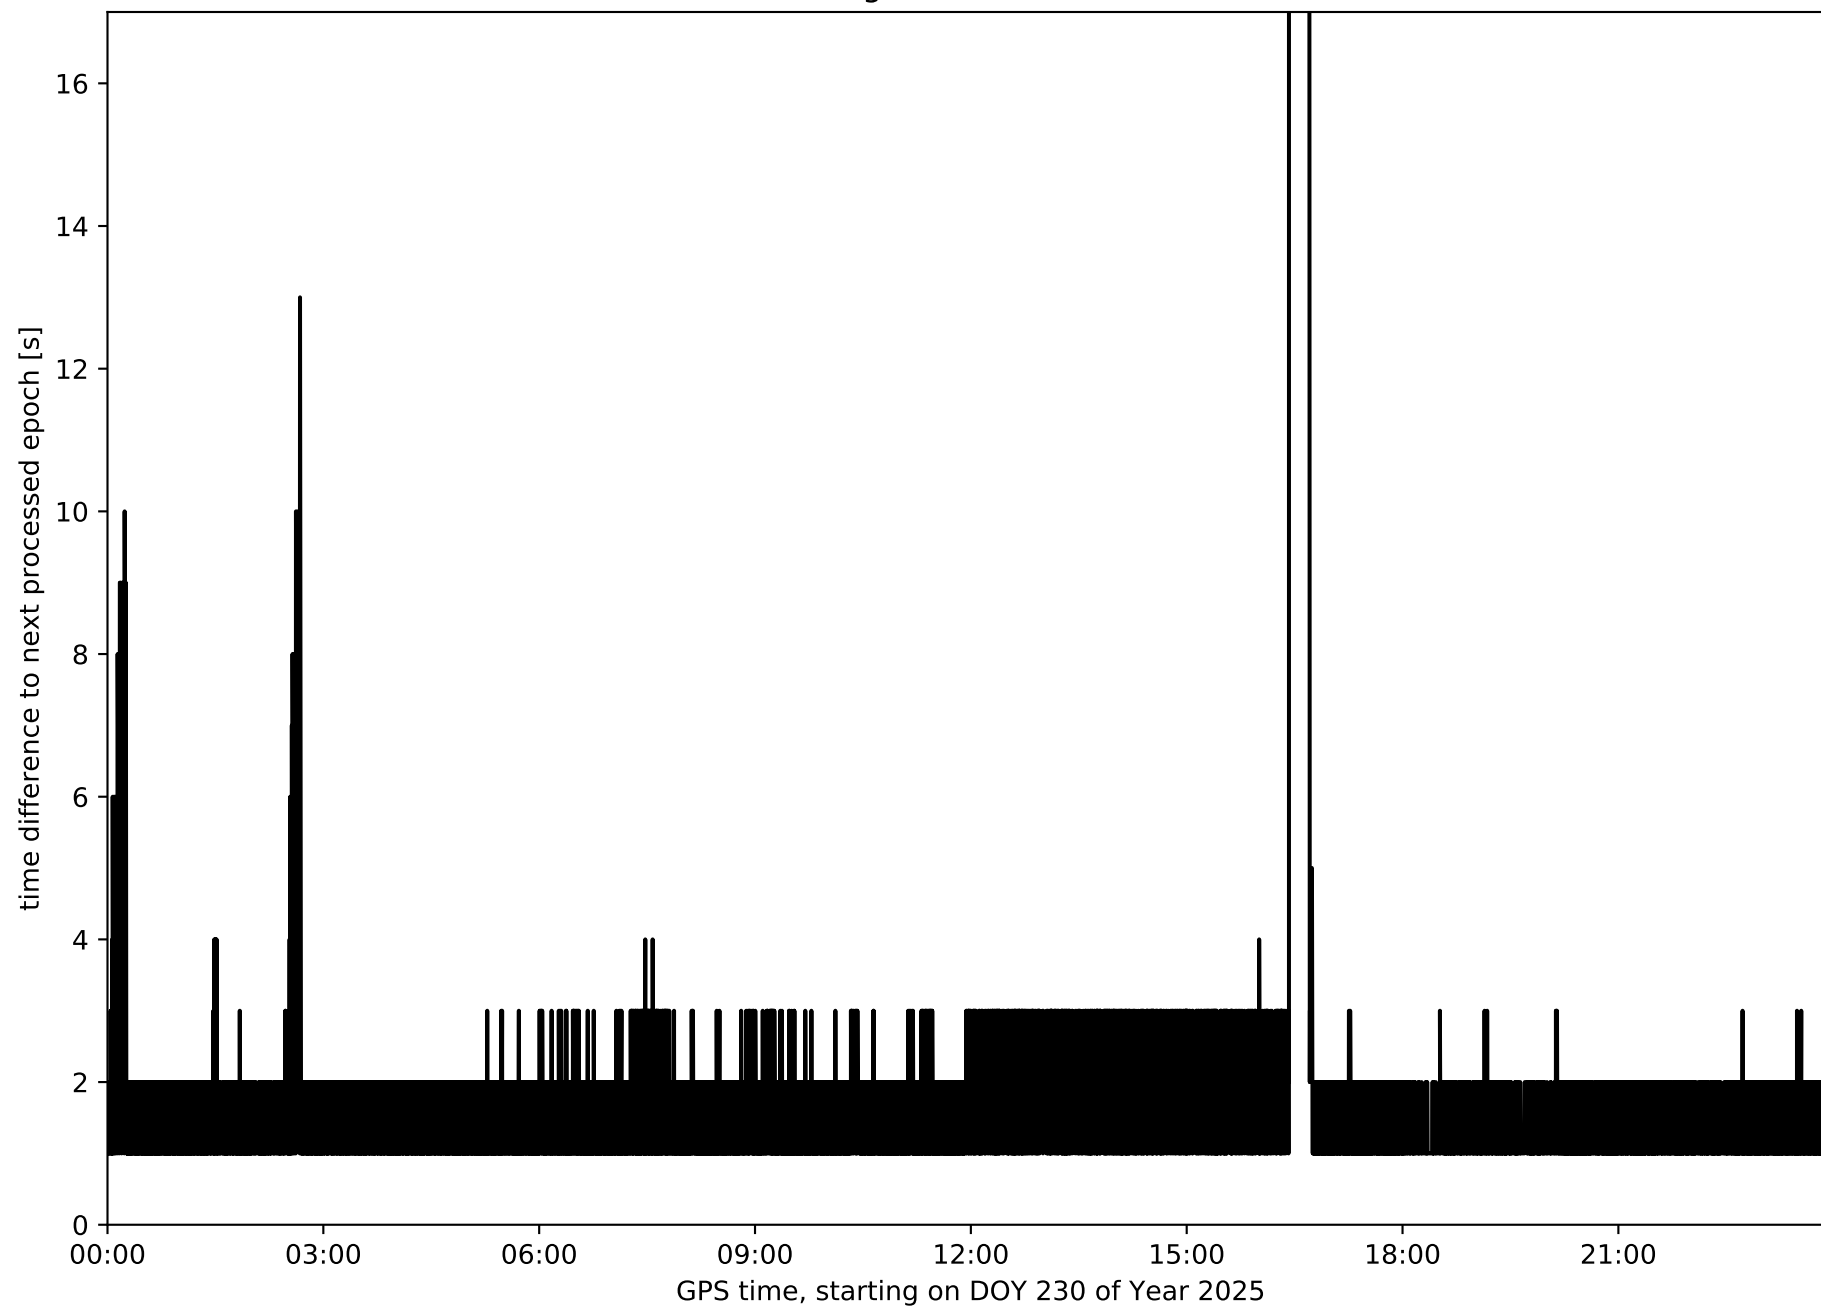


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

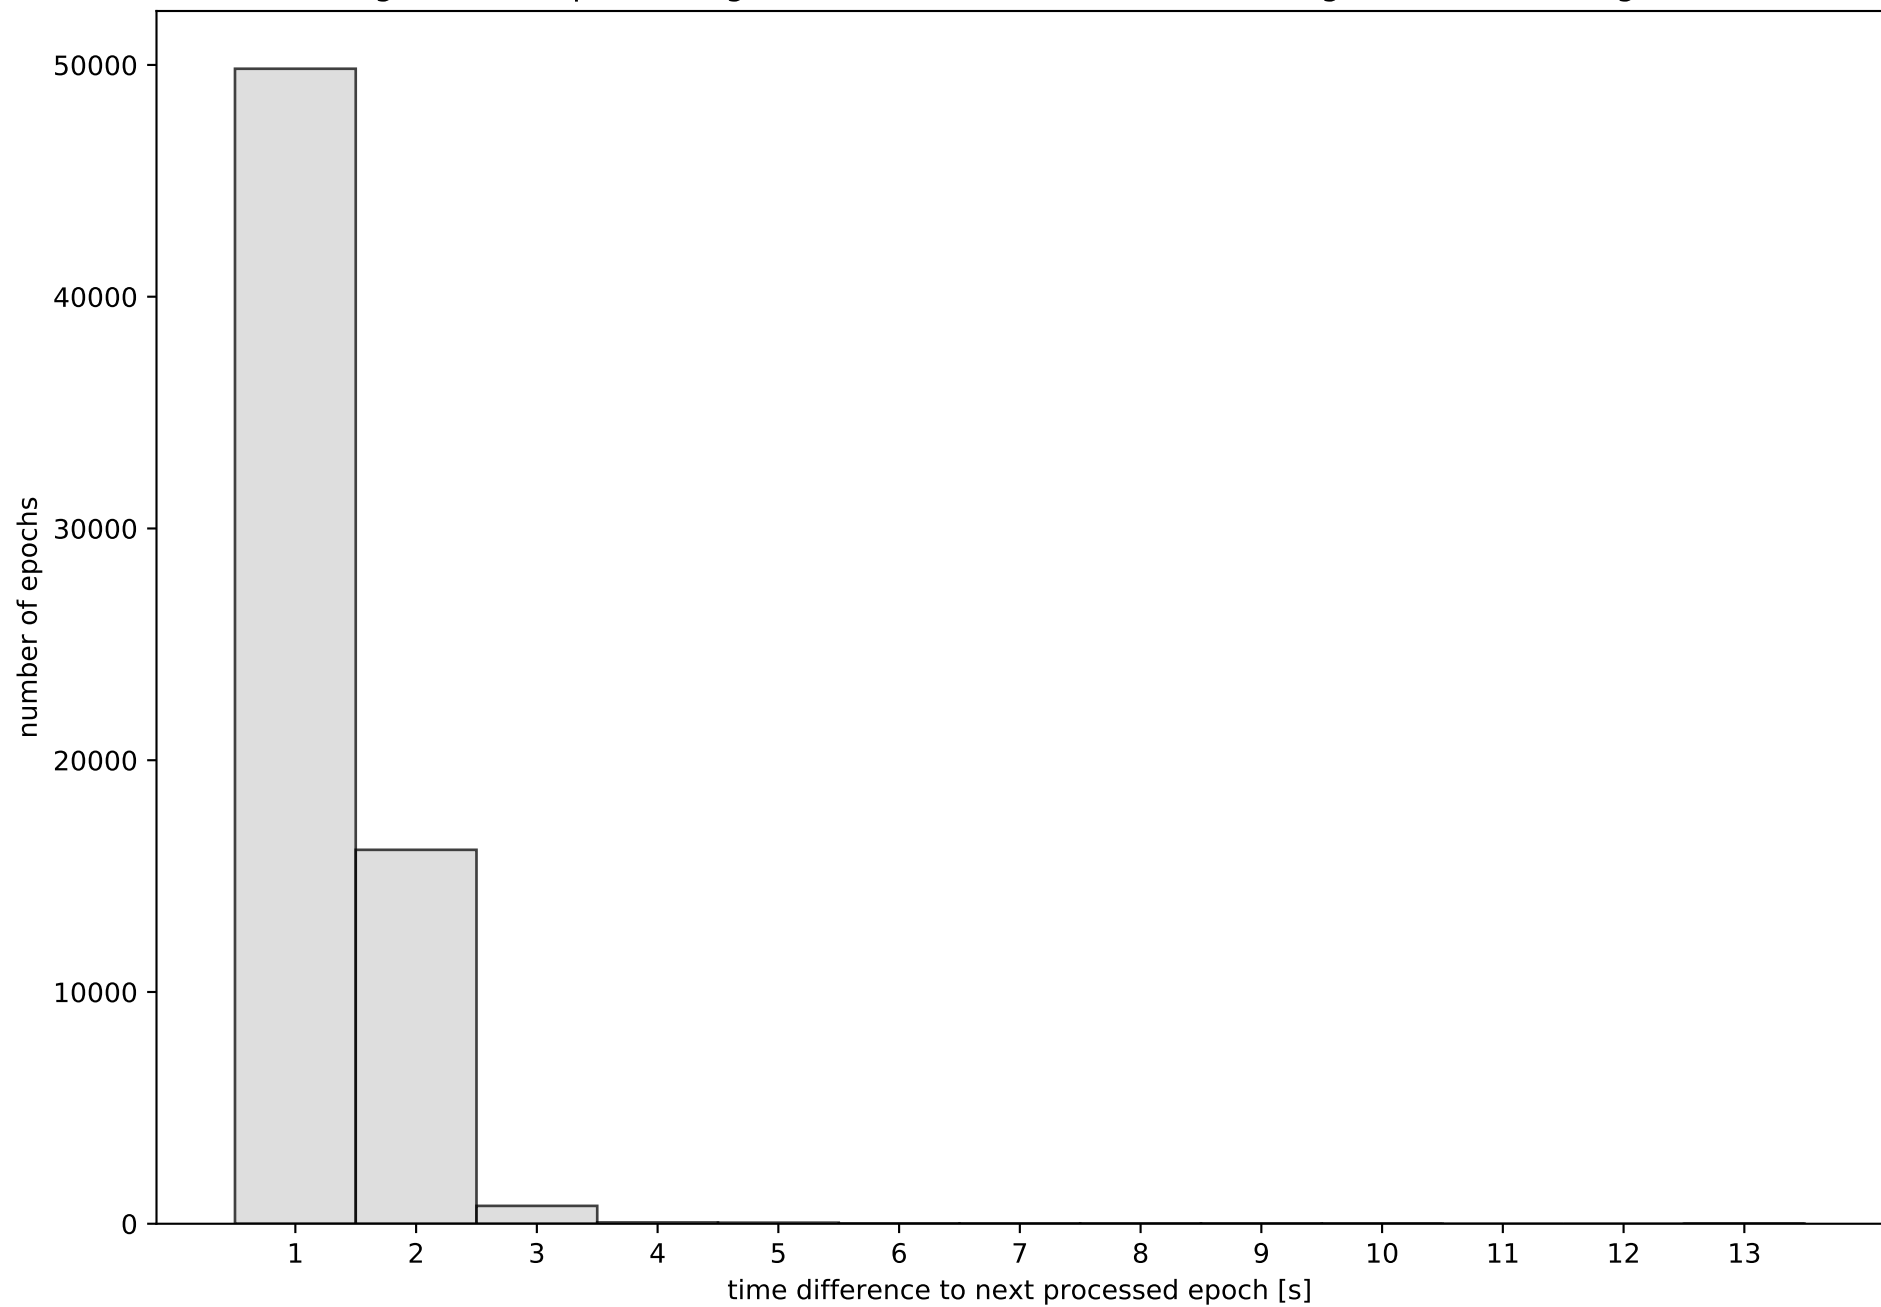


Network NT32 with threshold set to 0.3

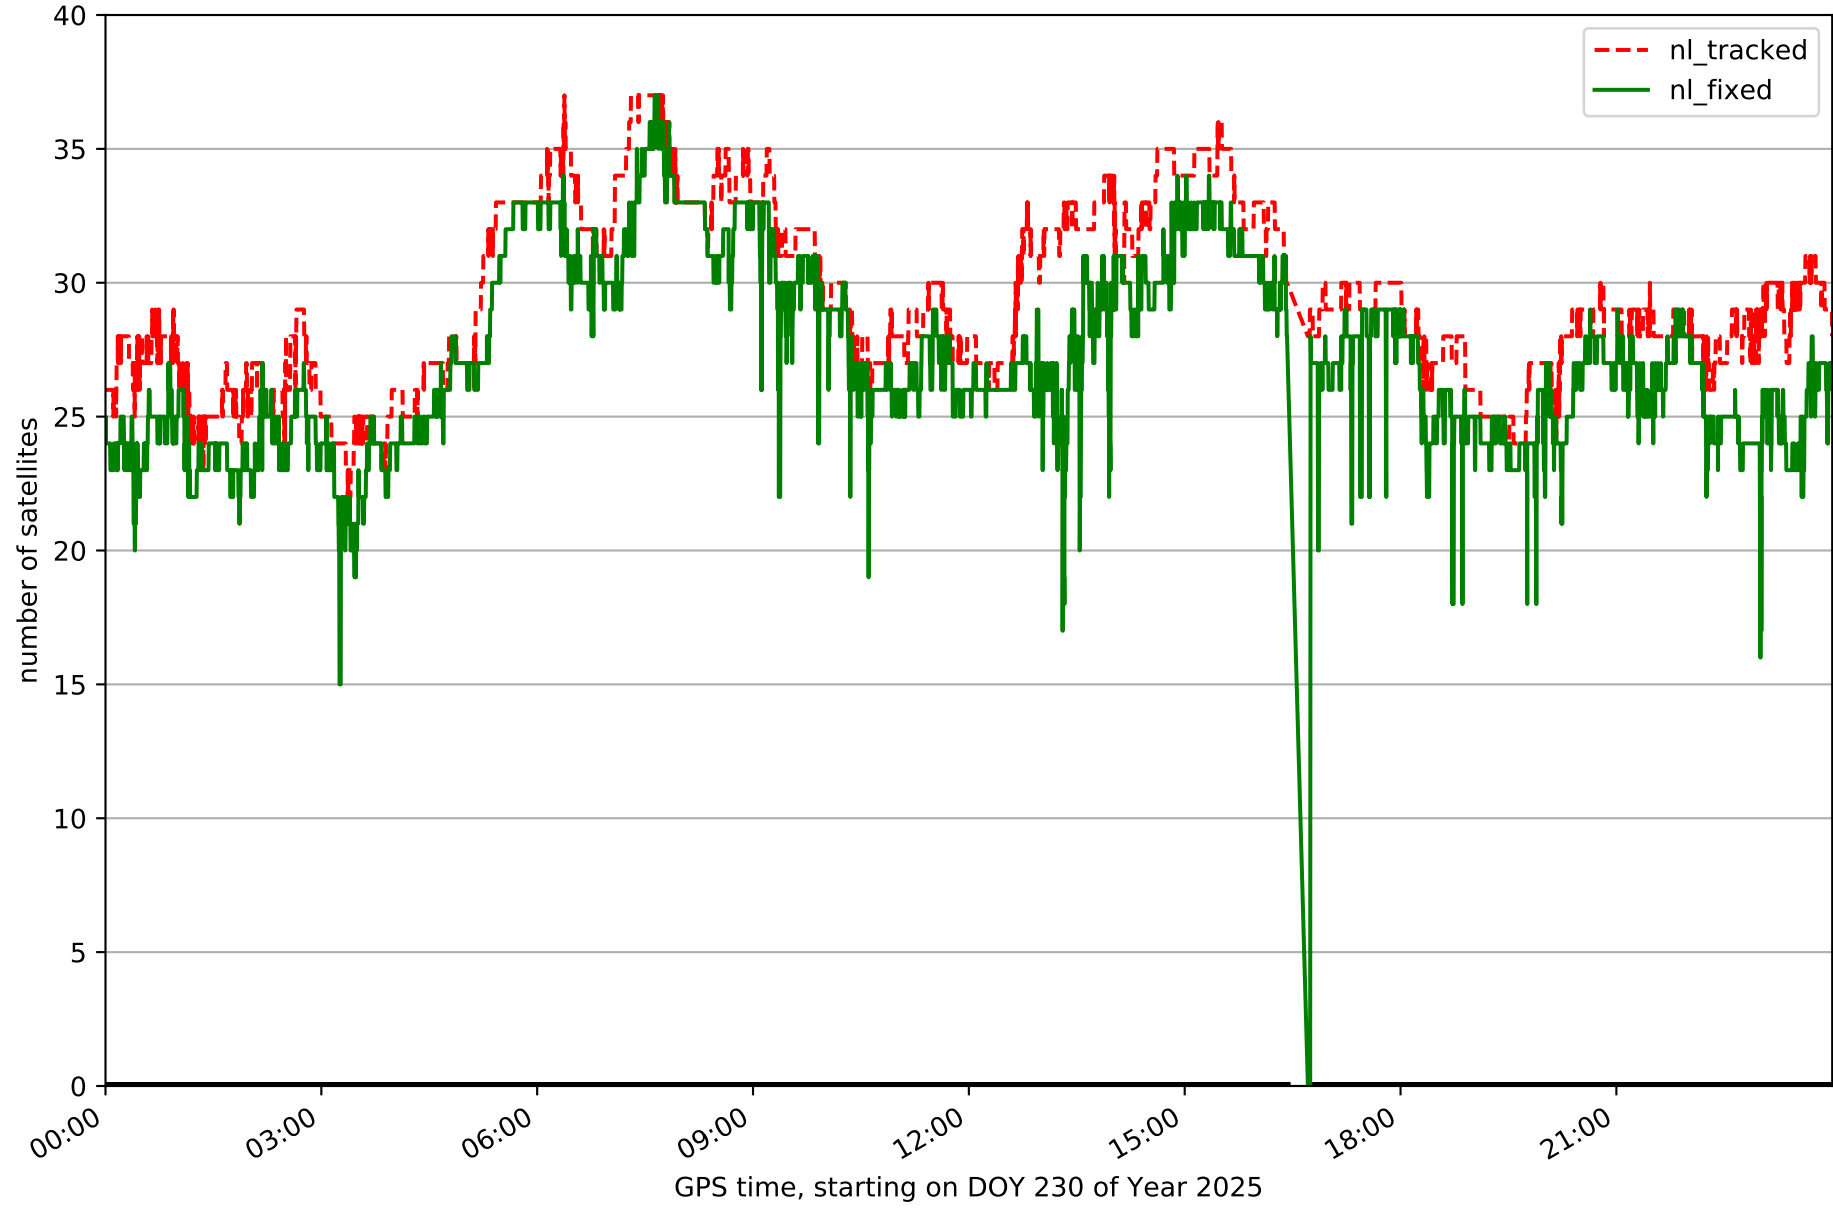


Fixing percentage of satellites in network NT32 with threshold set to 0.3

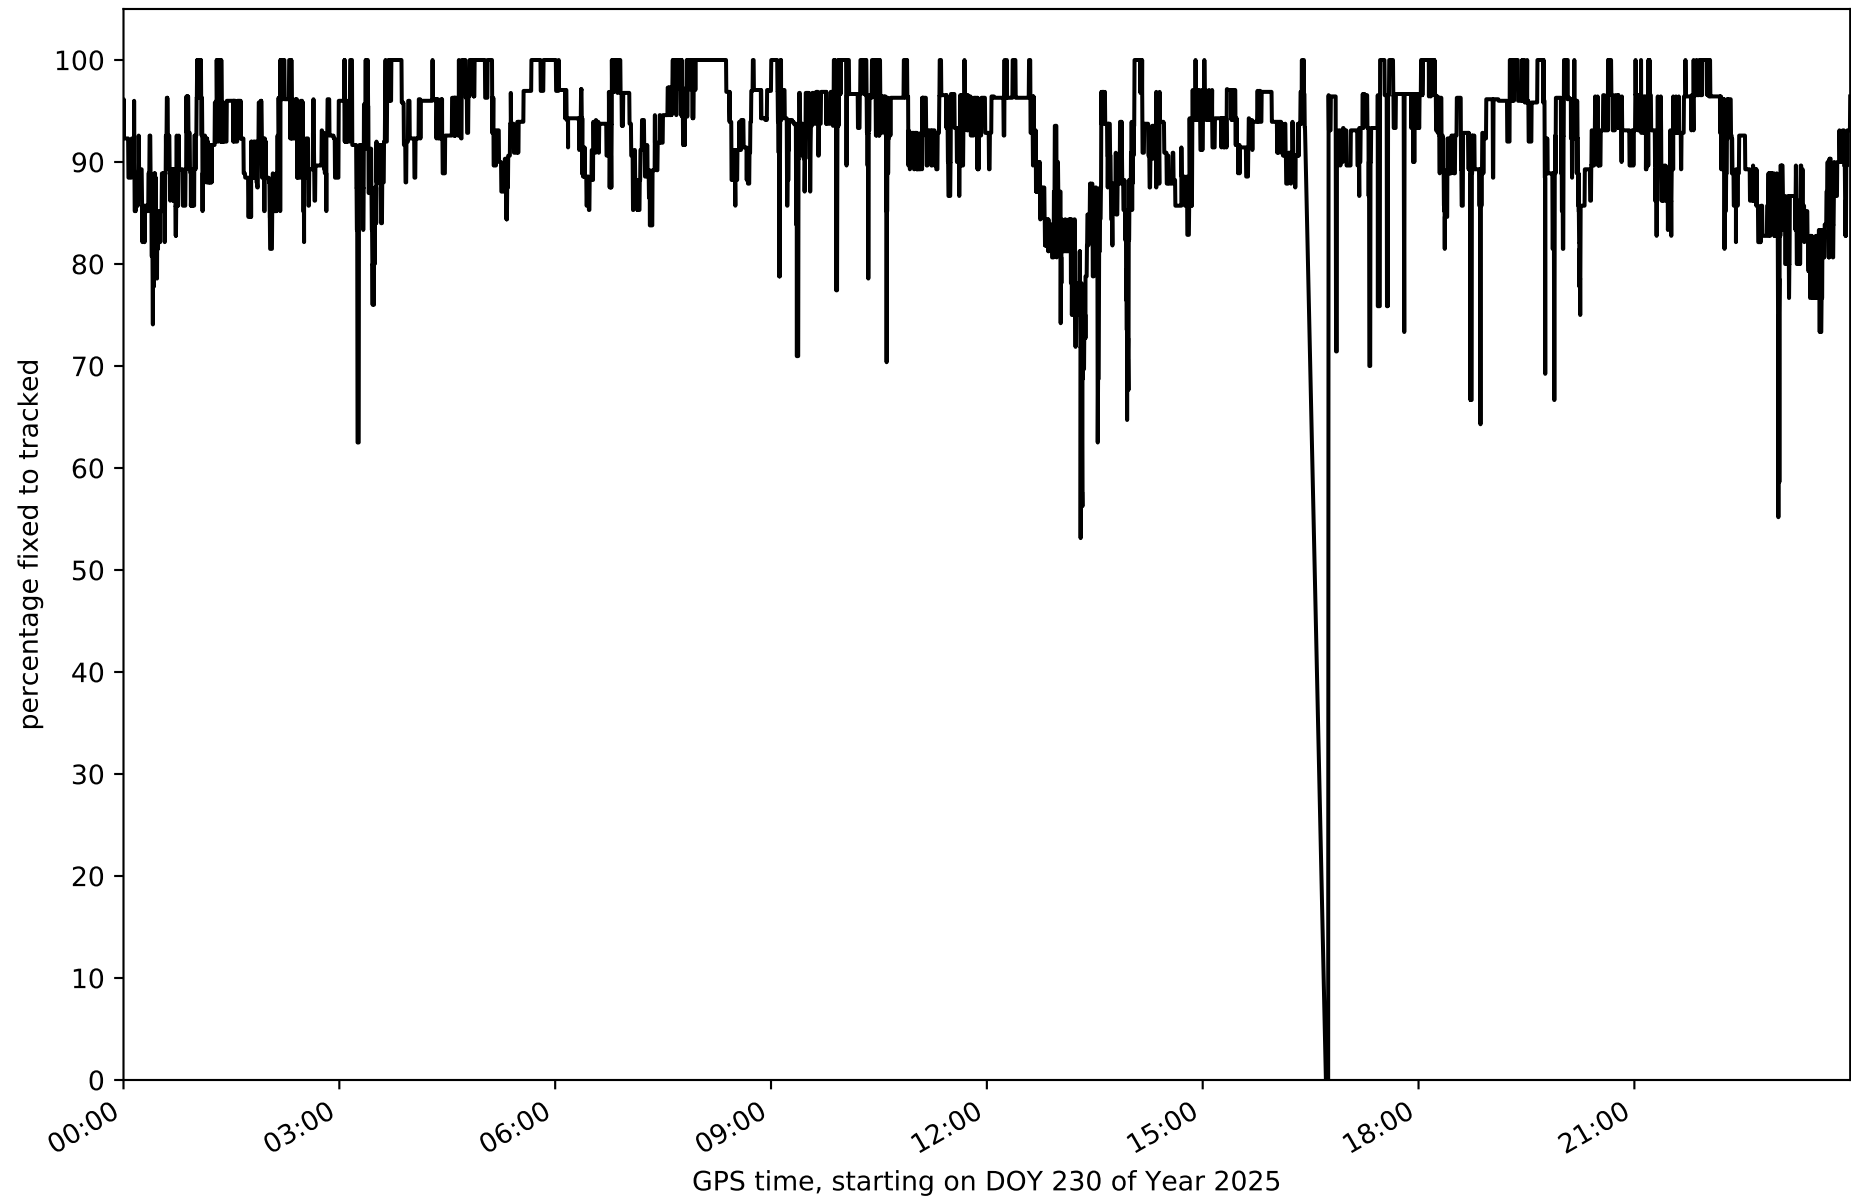


Network NT32 - only GPS with threshold set to 0.3

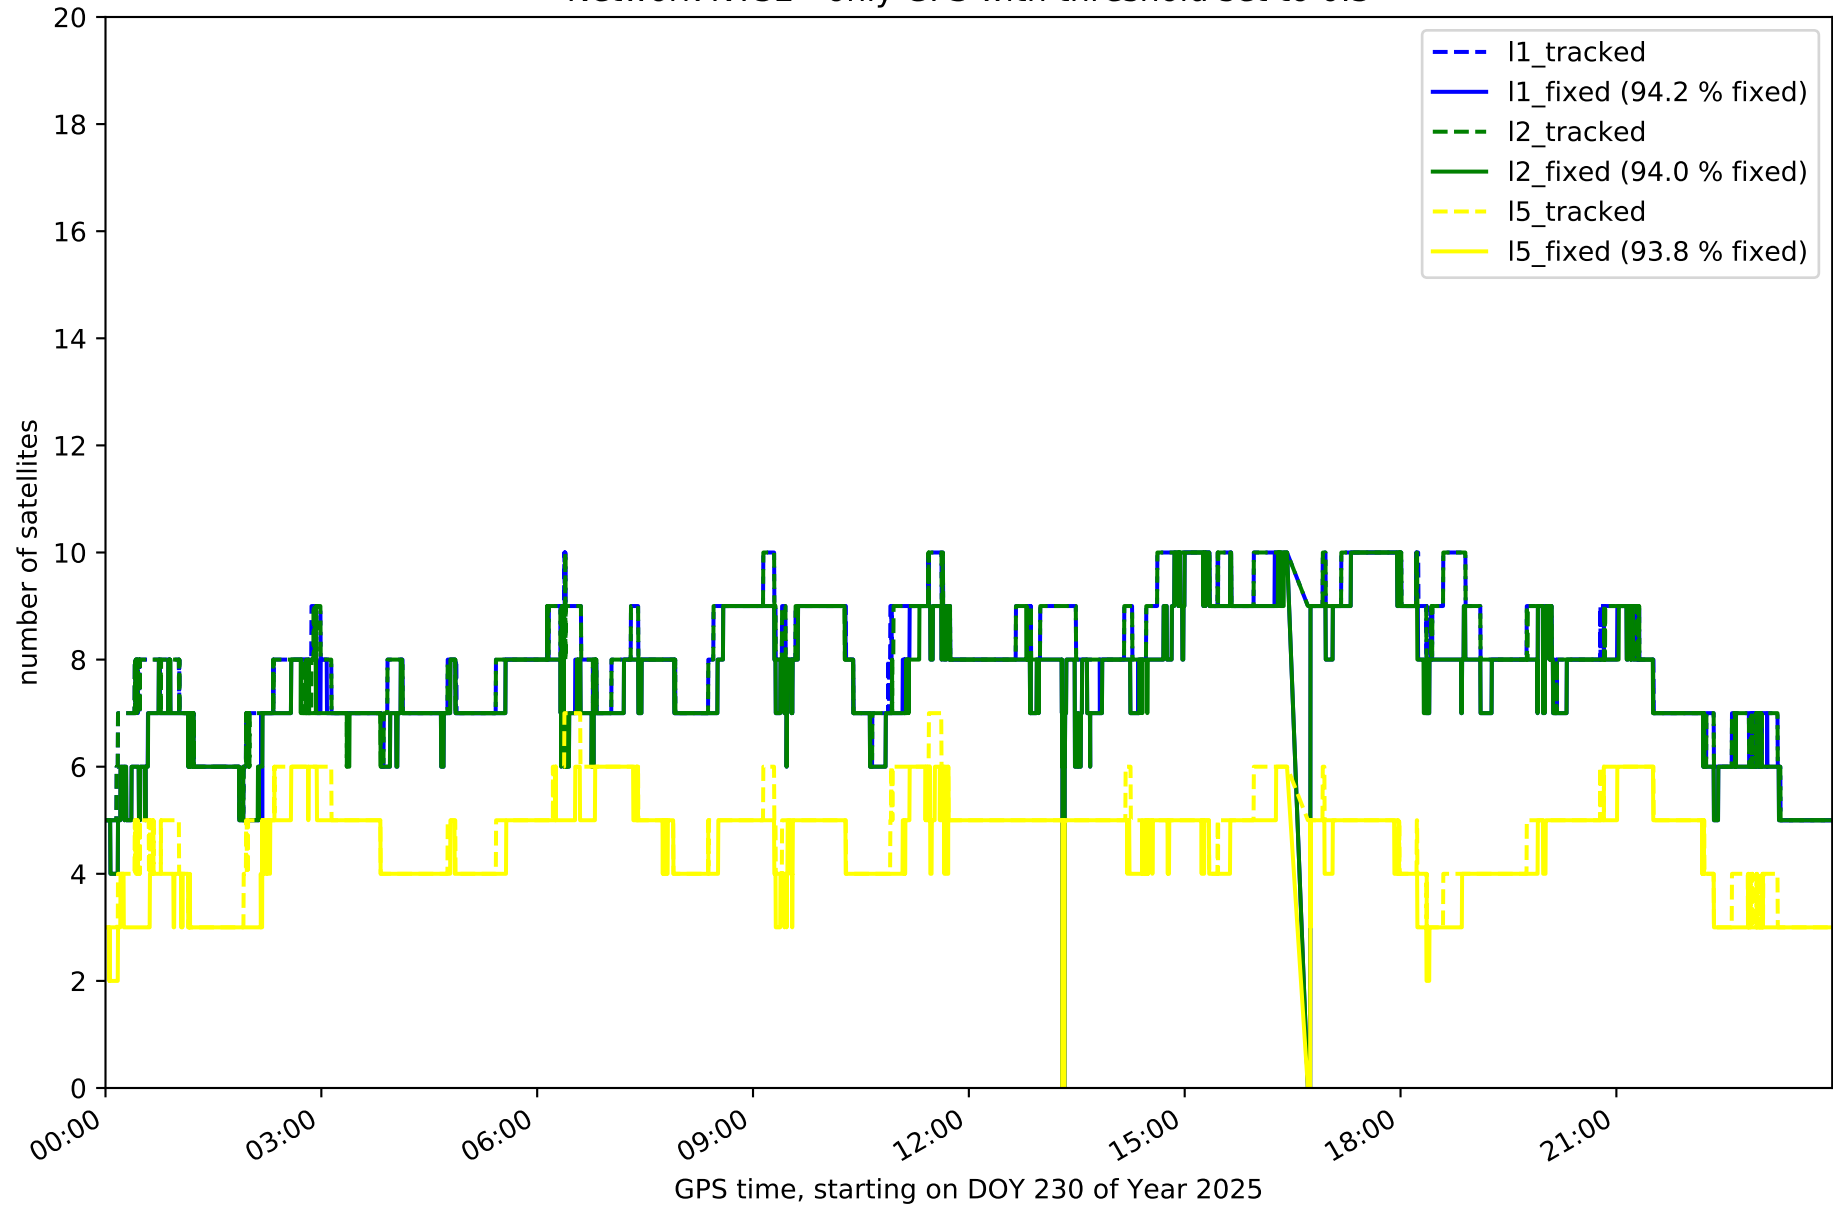


Network NT32 - only GLONASS with threshold set to 0.3

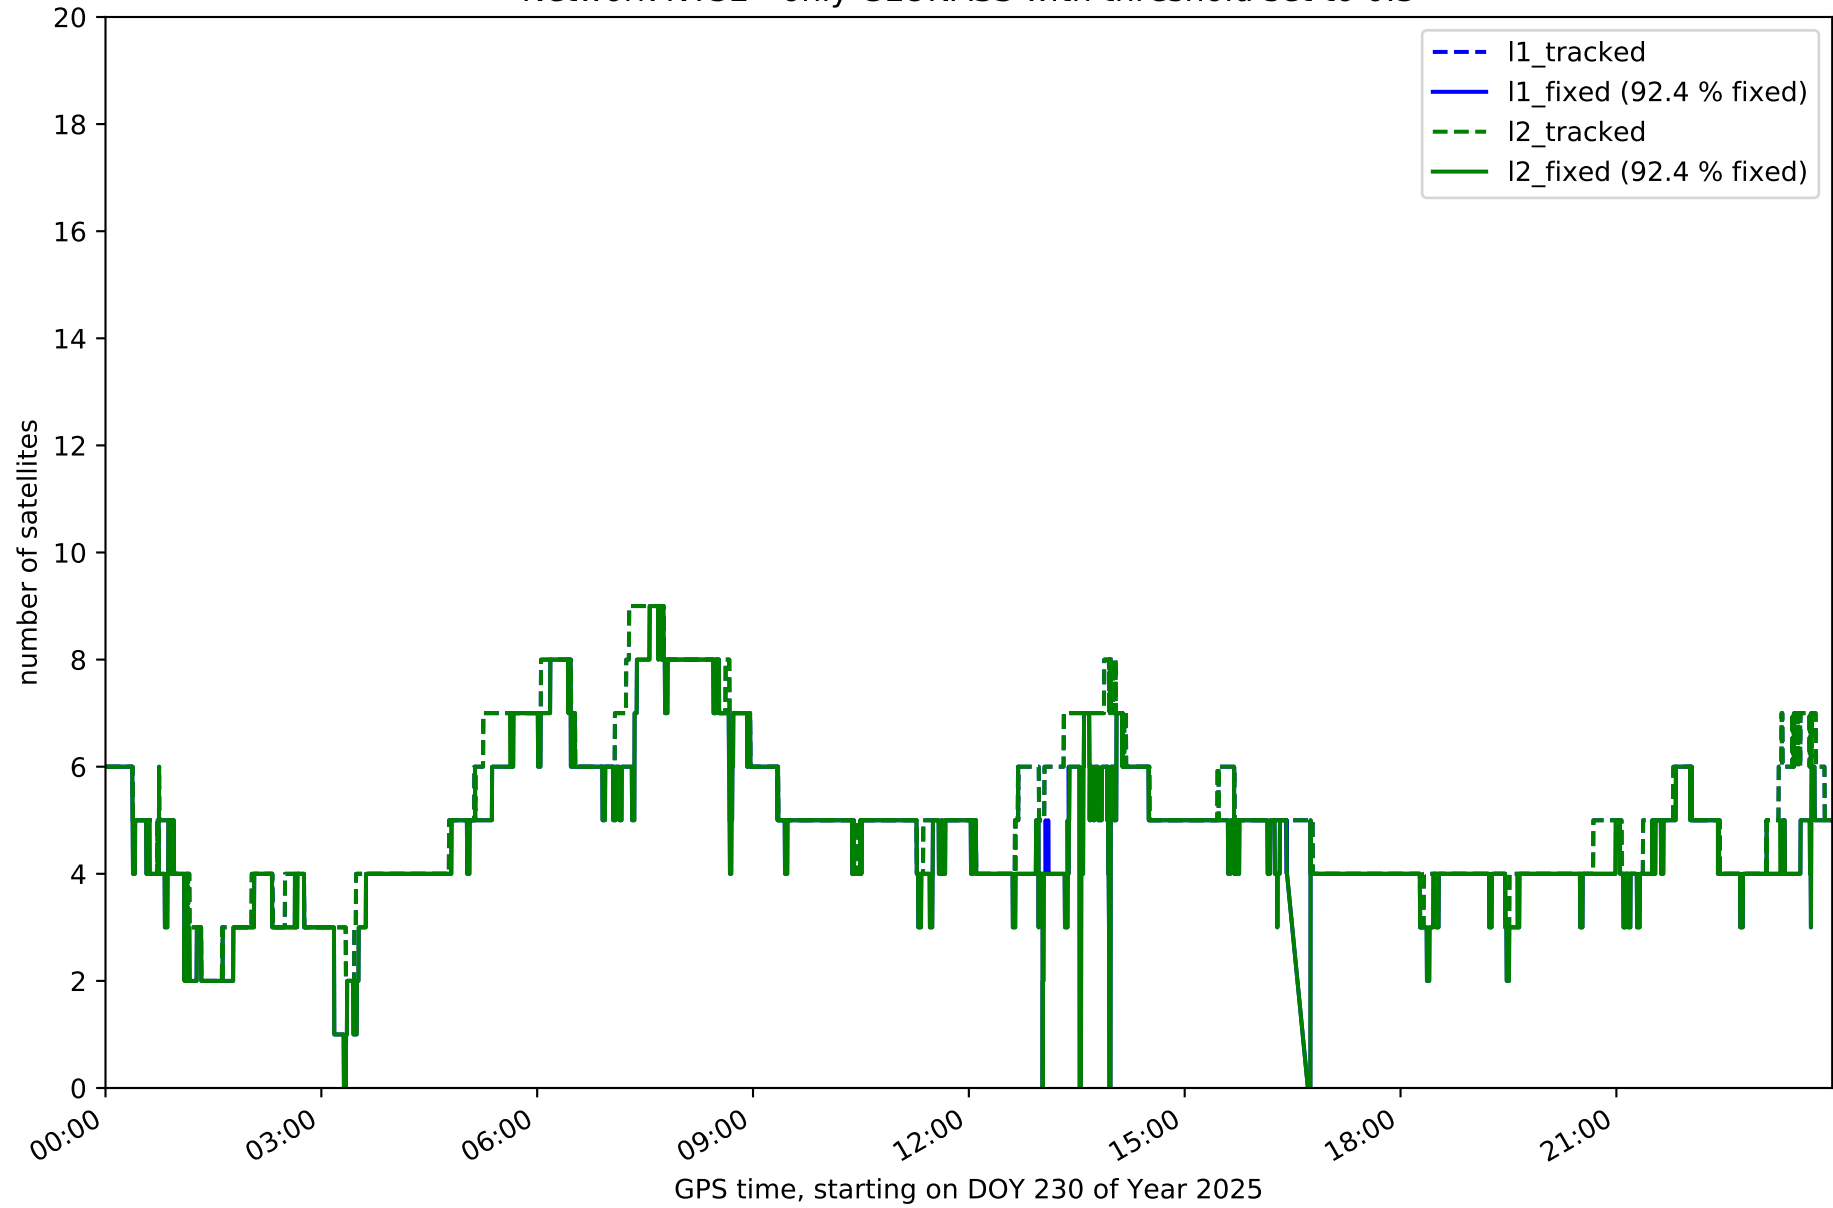


Network NT32 - only BDS with threshold set to 0.3

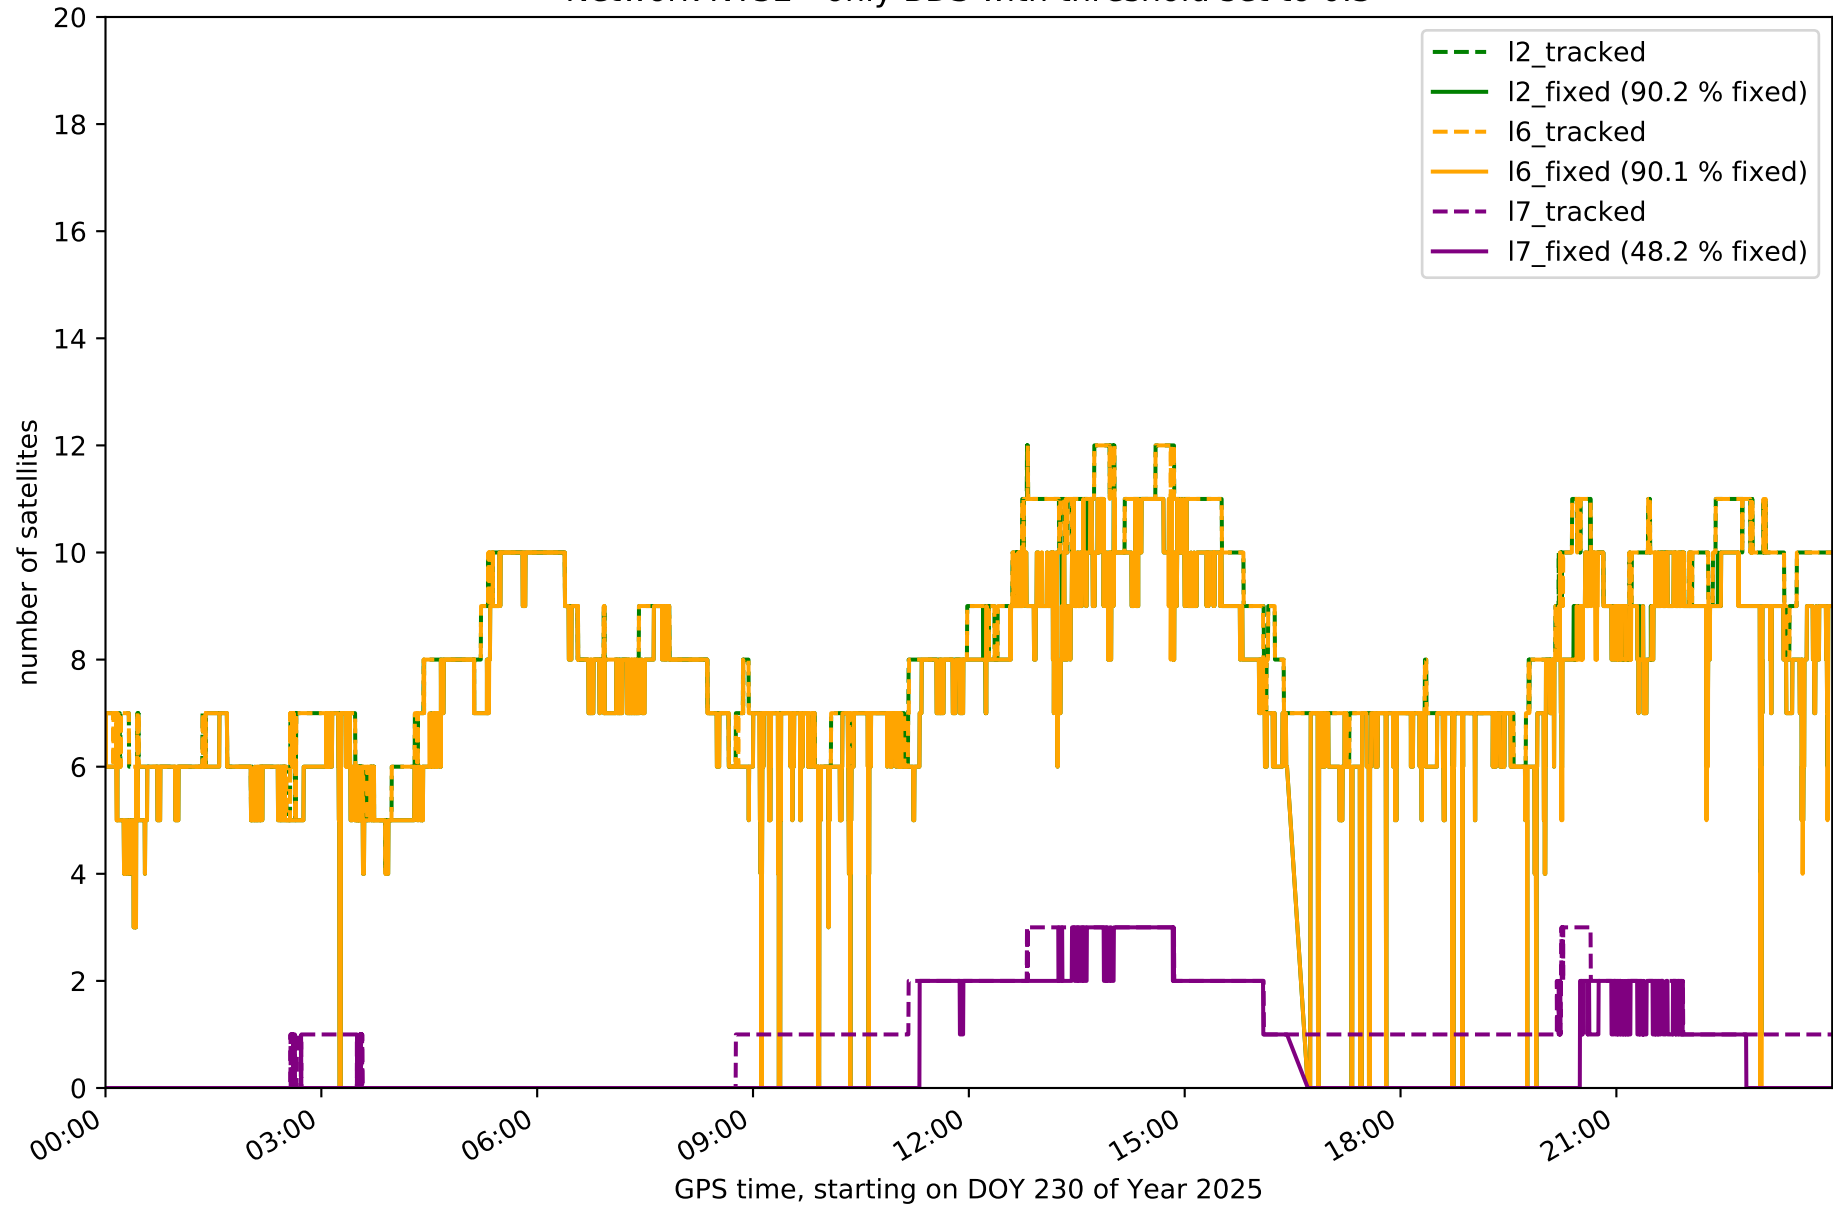


Network NT32 - only Galileo with threshold set to 0.3

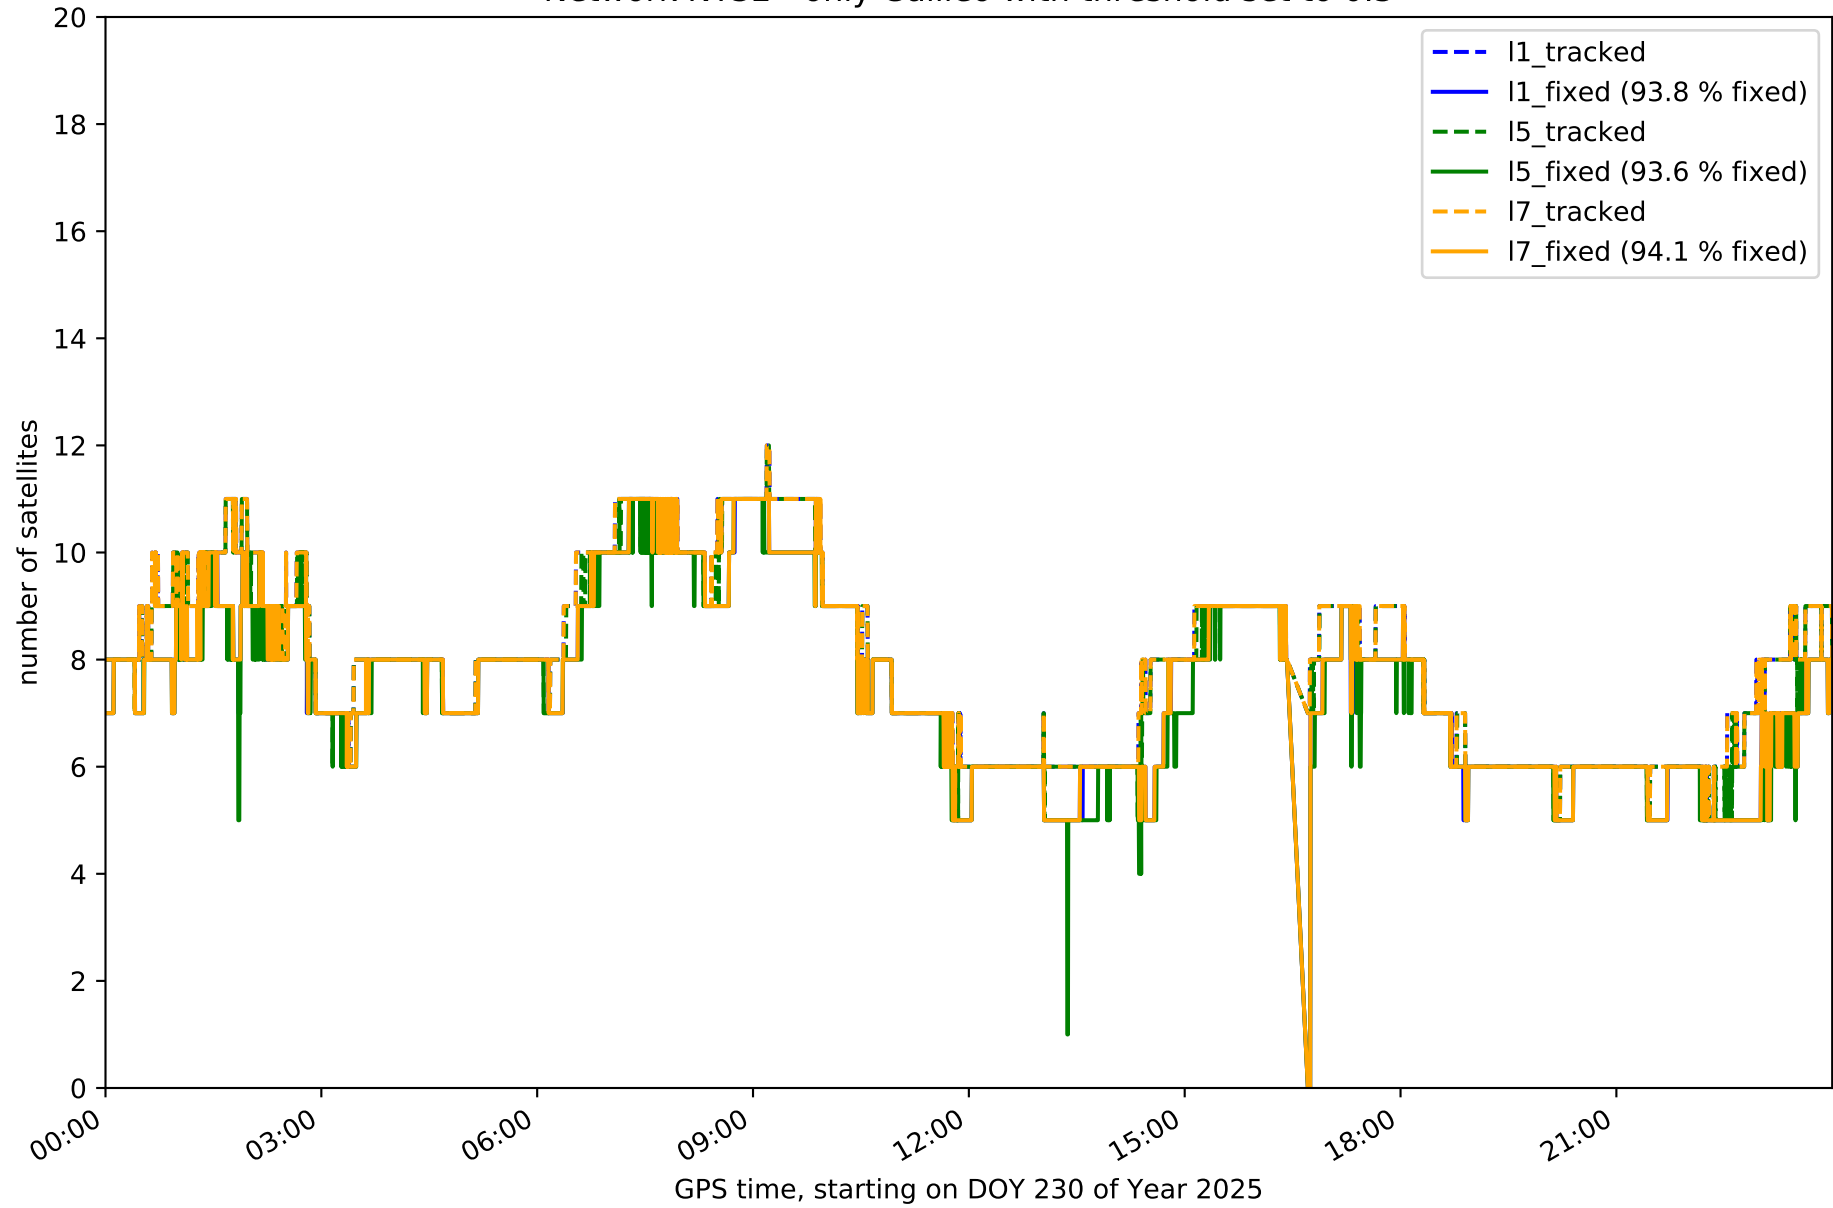


Station EH01 in network NT32

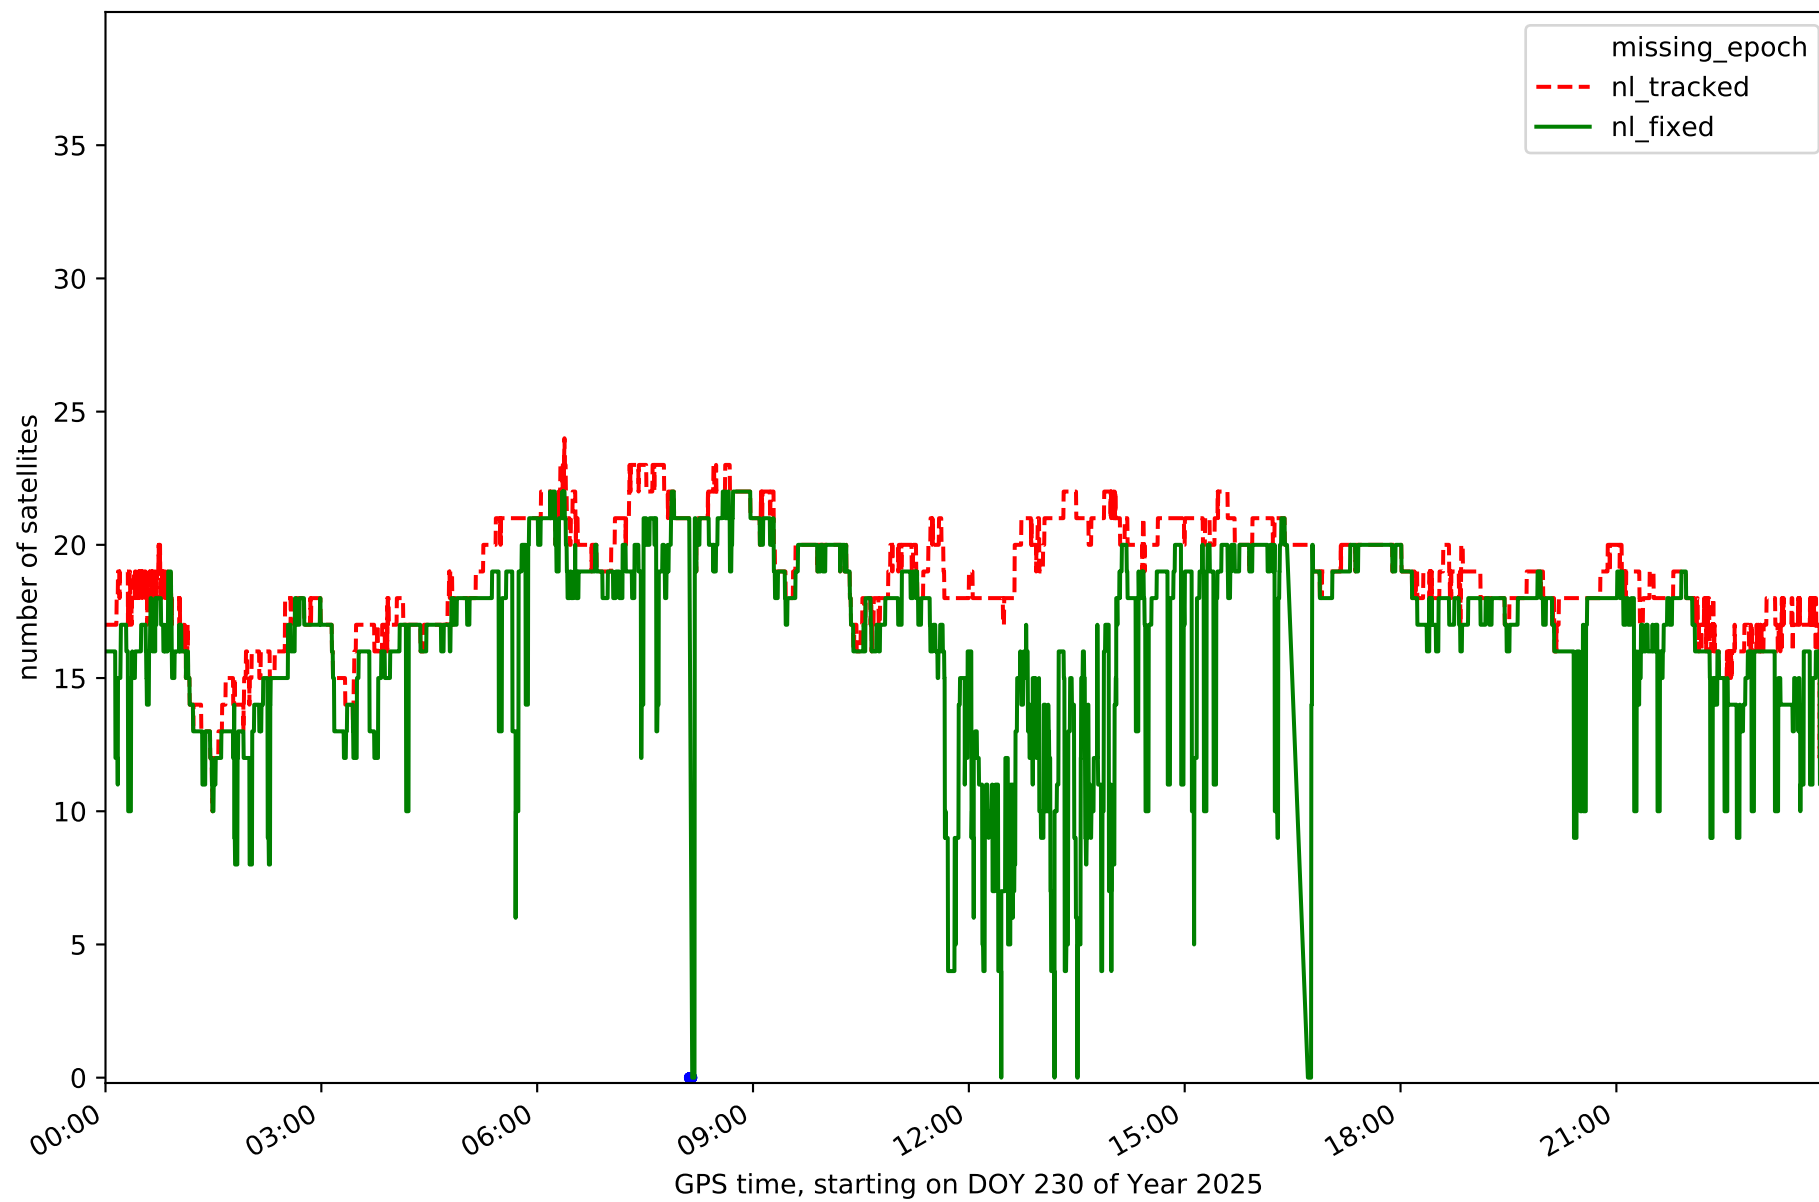


Station EH02 in network NT32

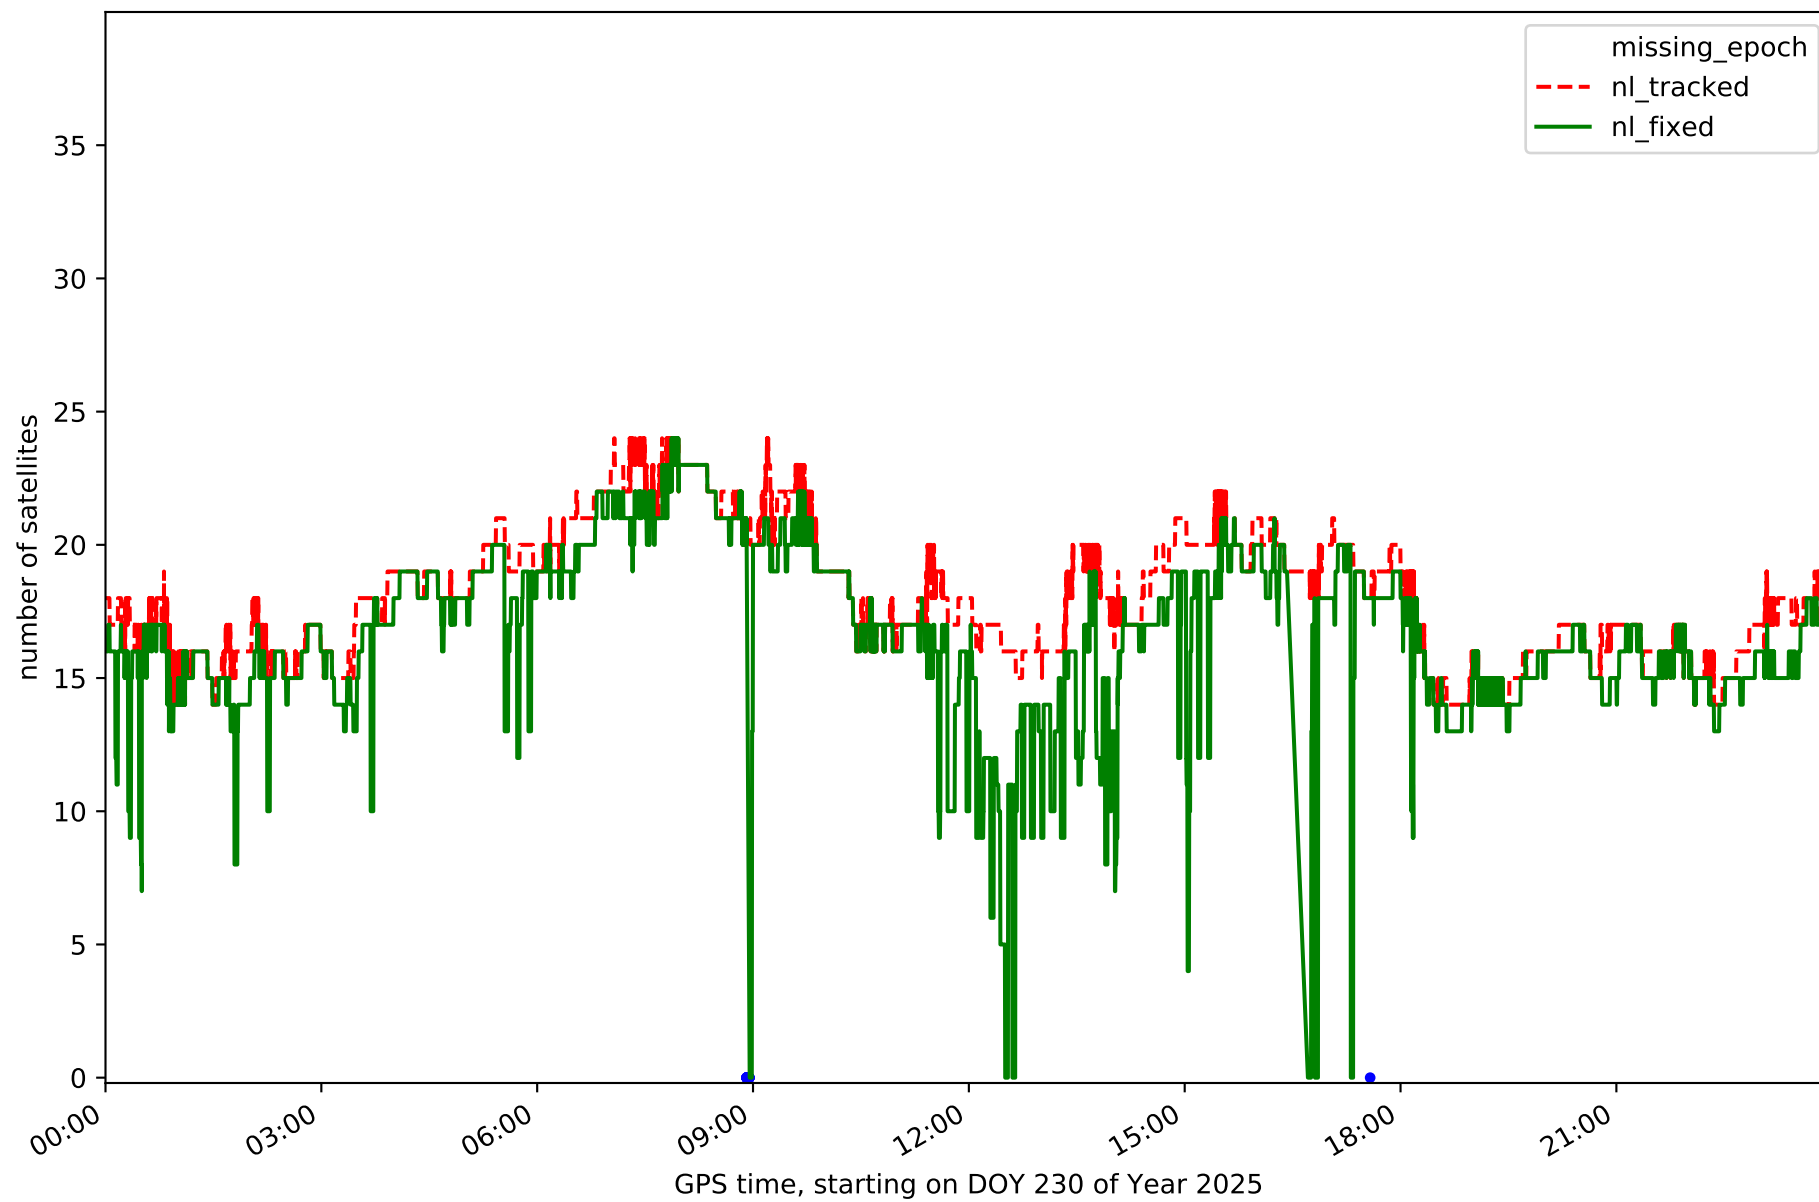


Station GOM1 in network NT32

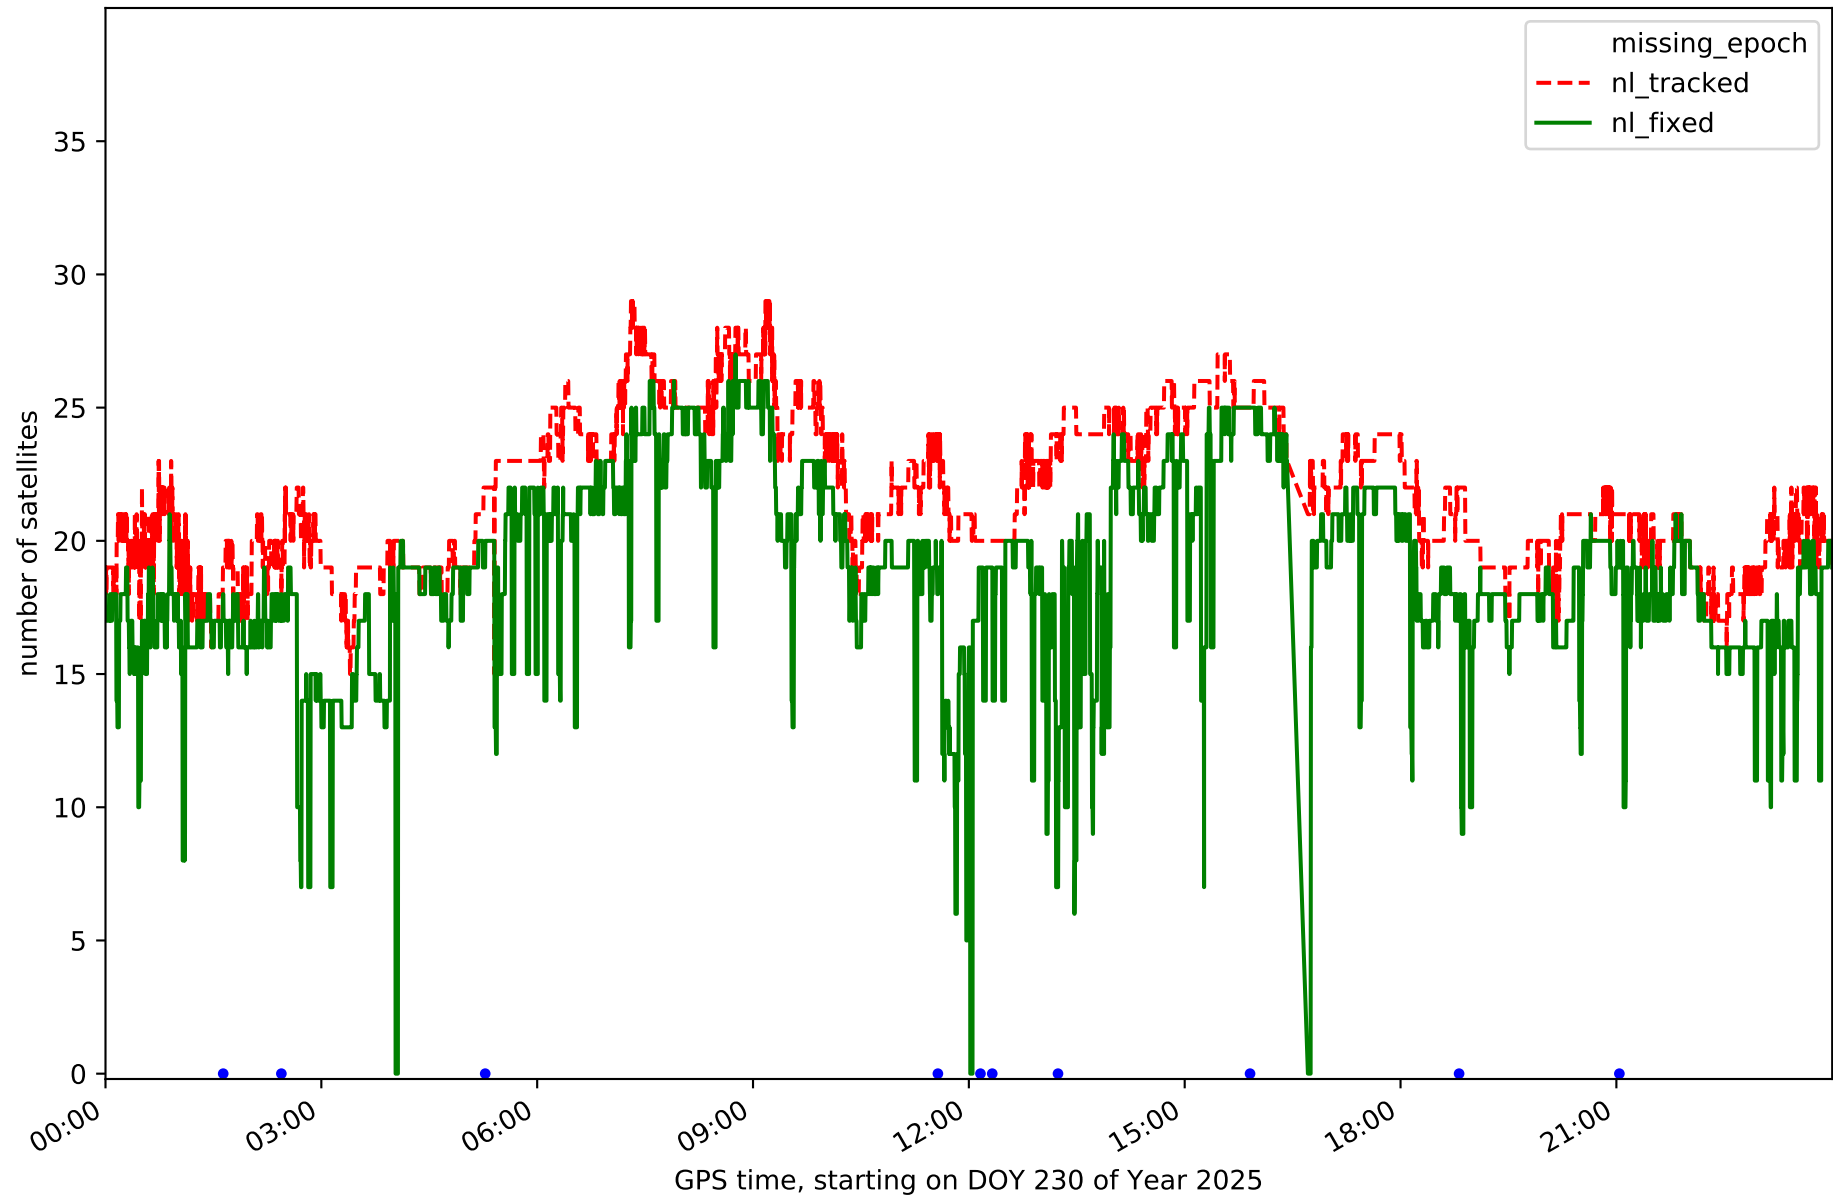


Station IZAN in network NT32

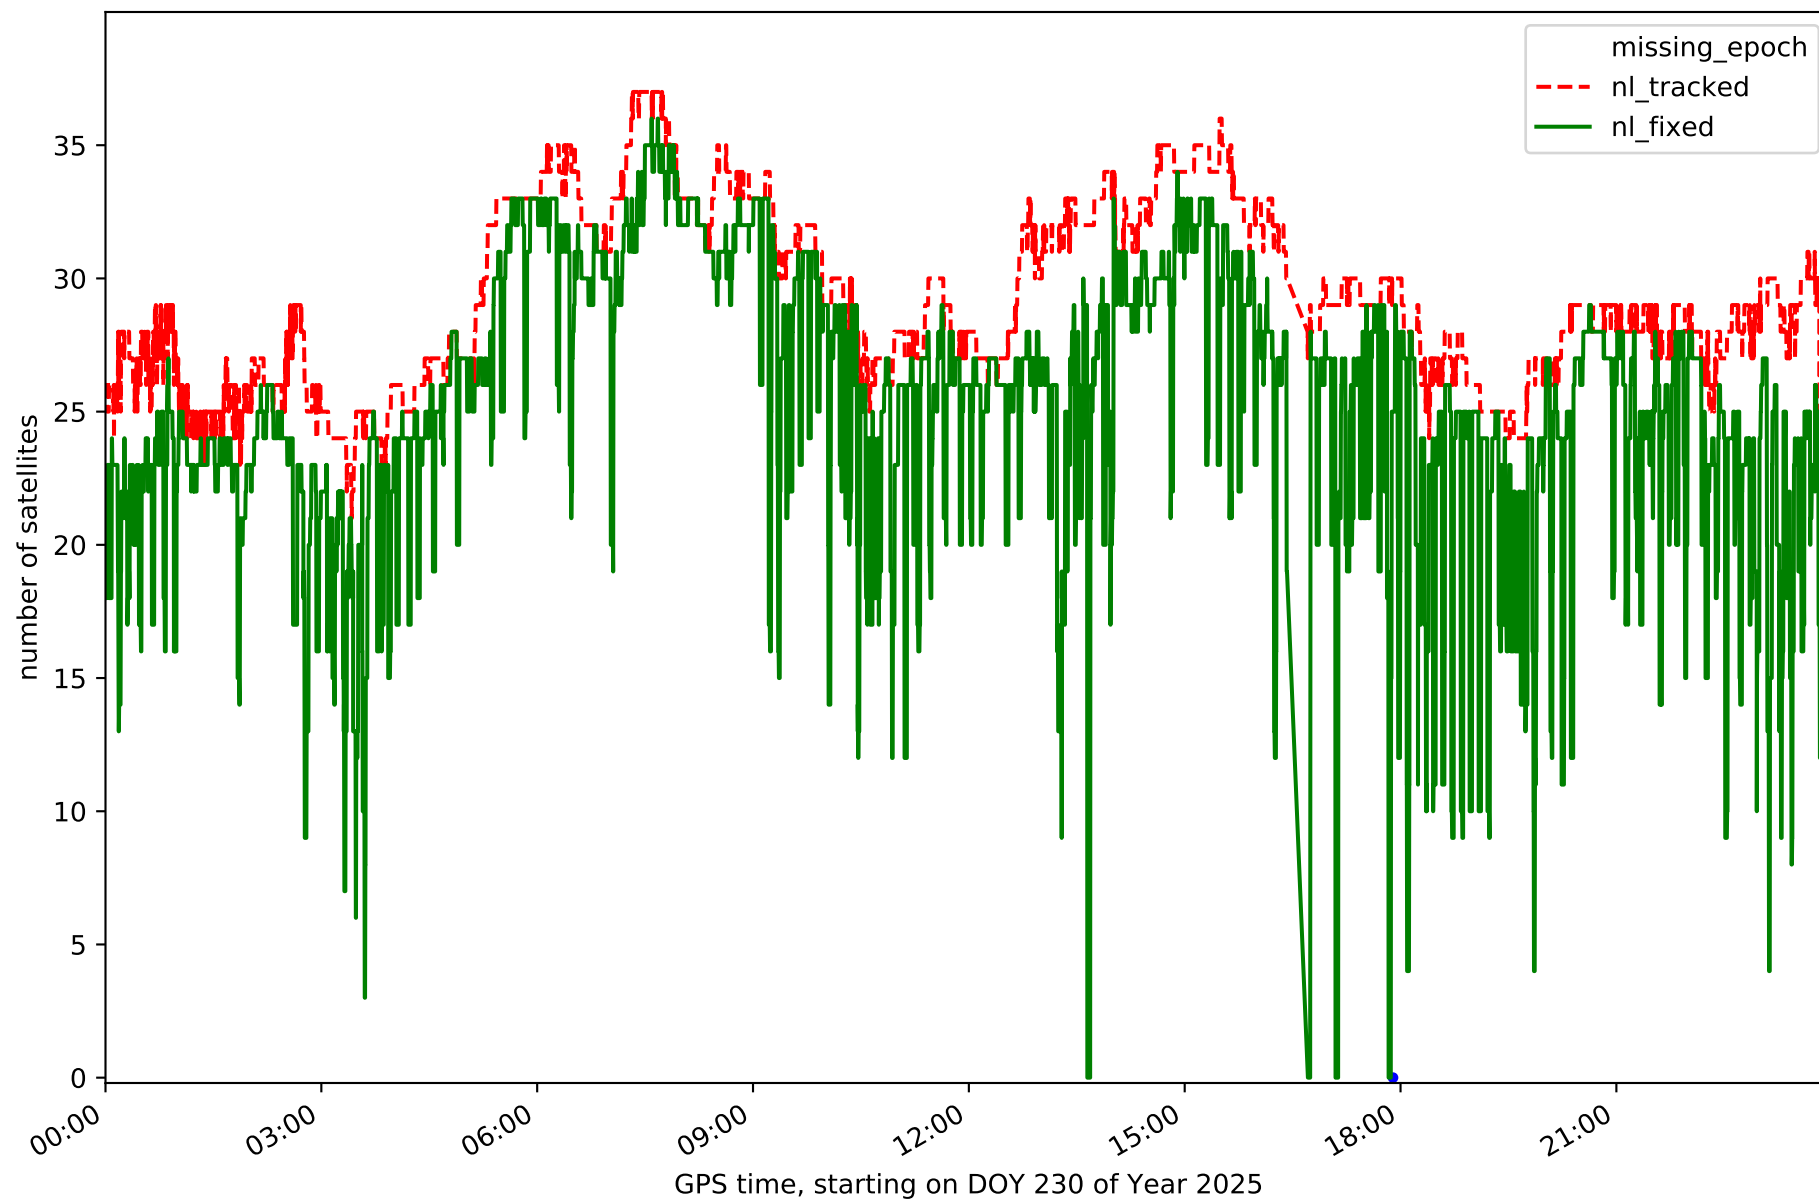


Station LP01 in network NT32

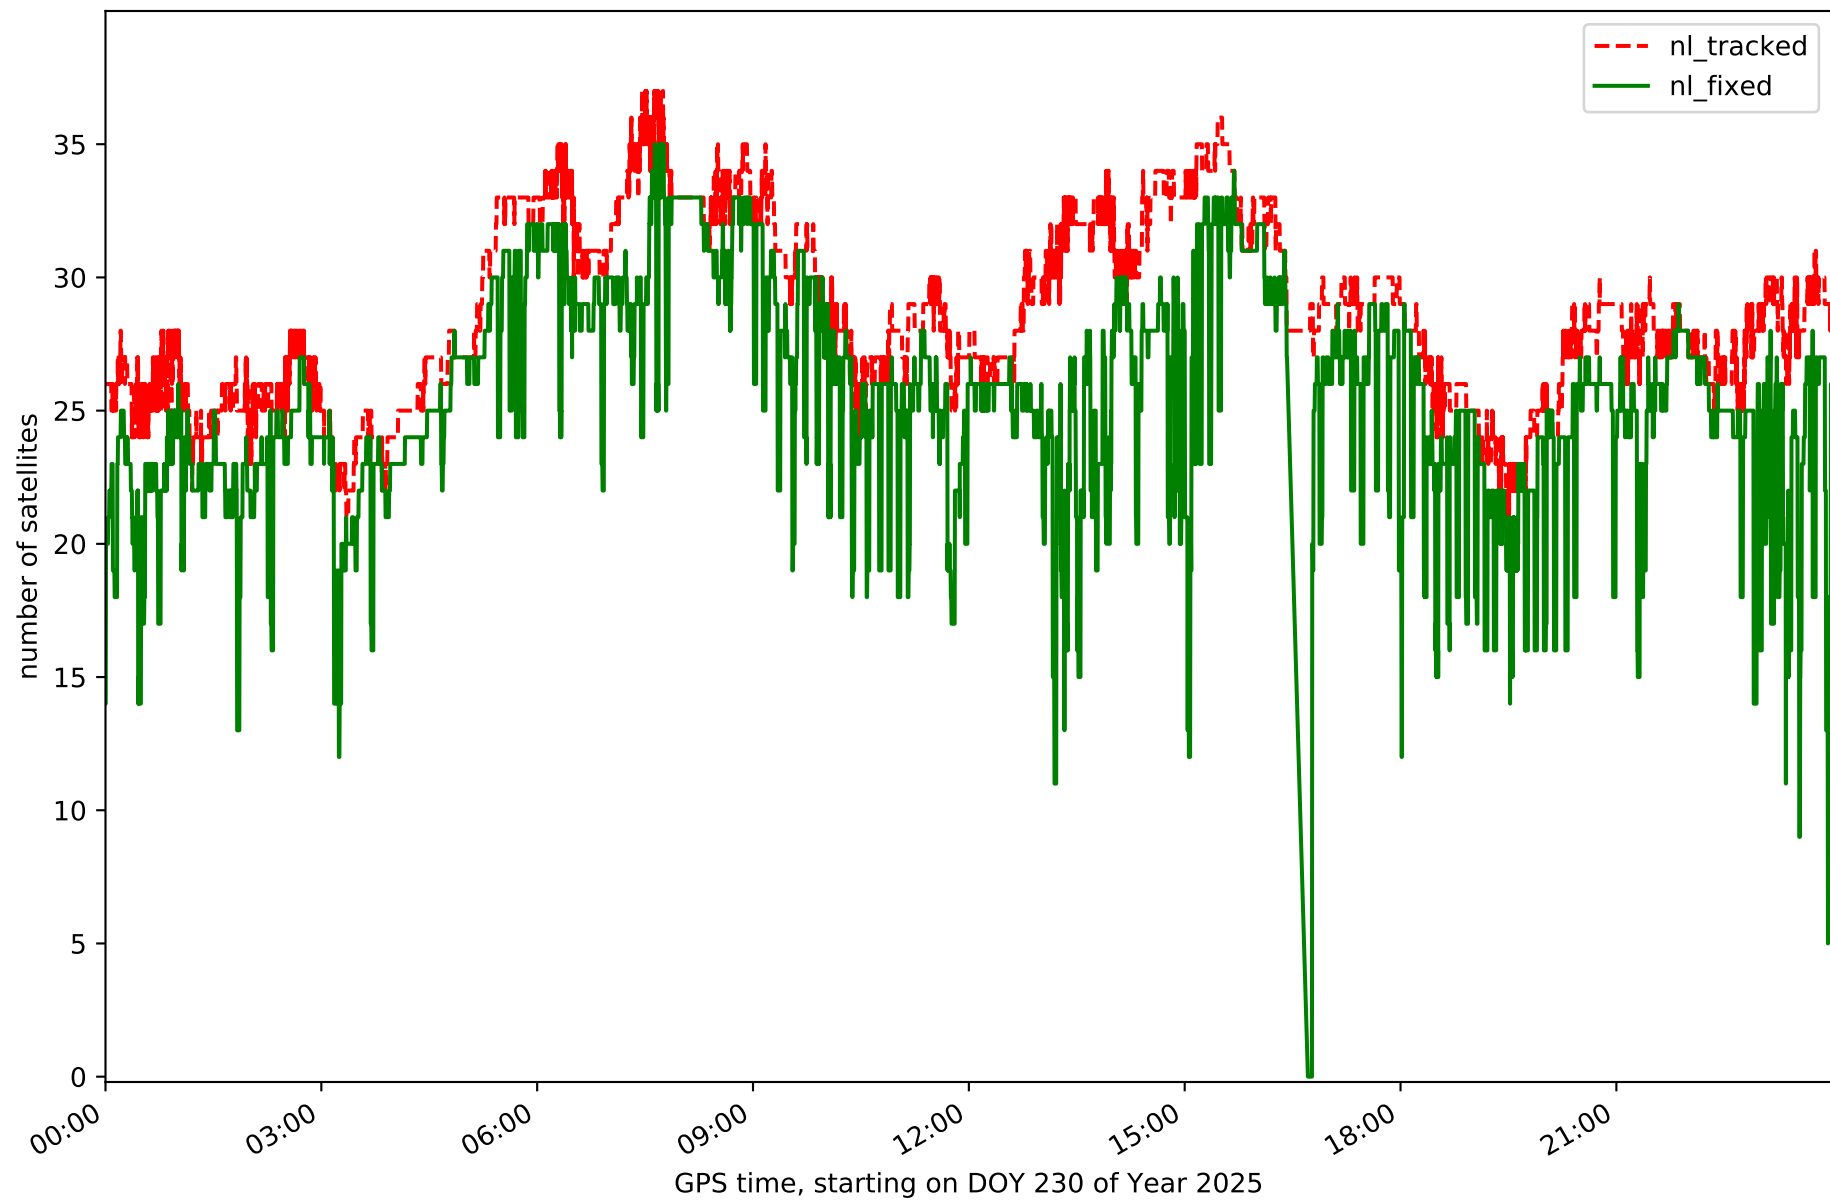


Station LP03 in network NT32

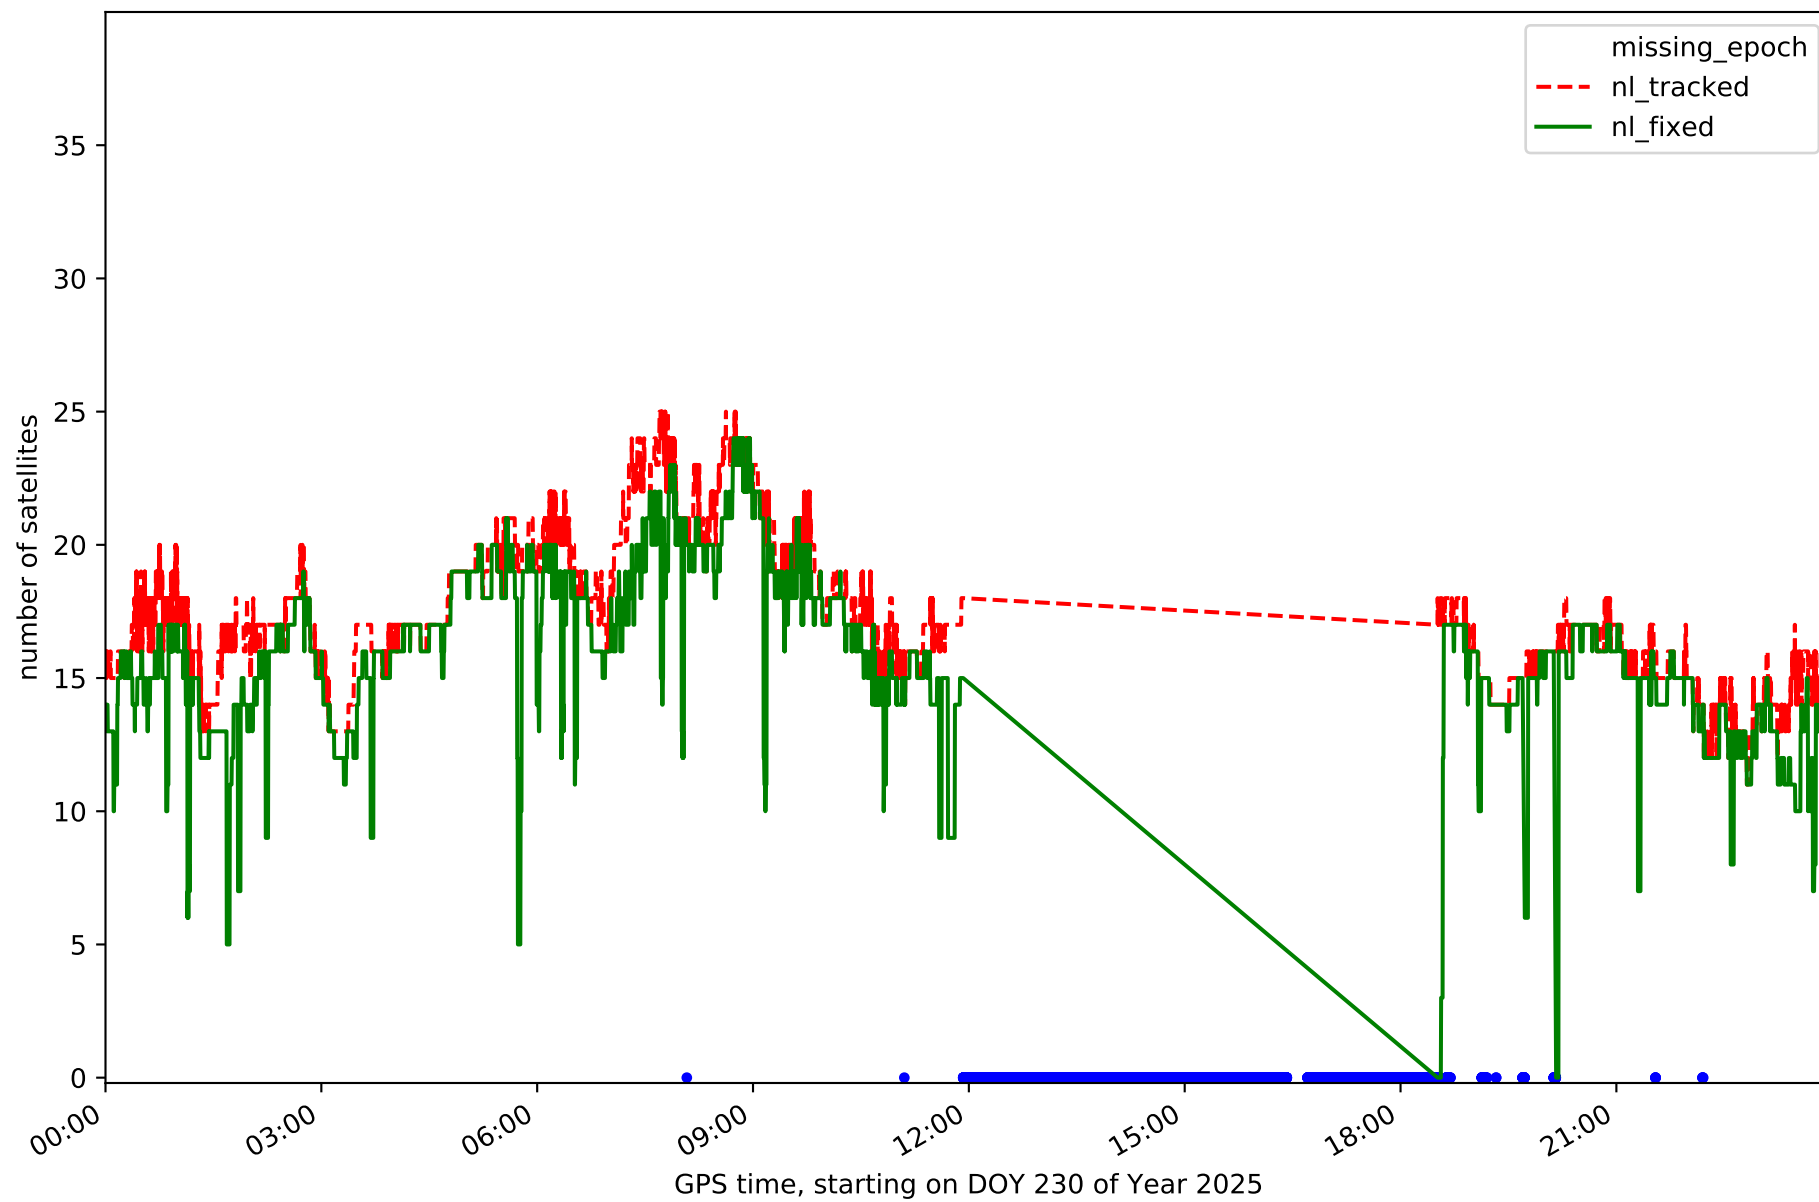


Station LPAL in network NT32

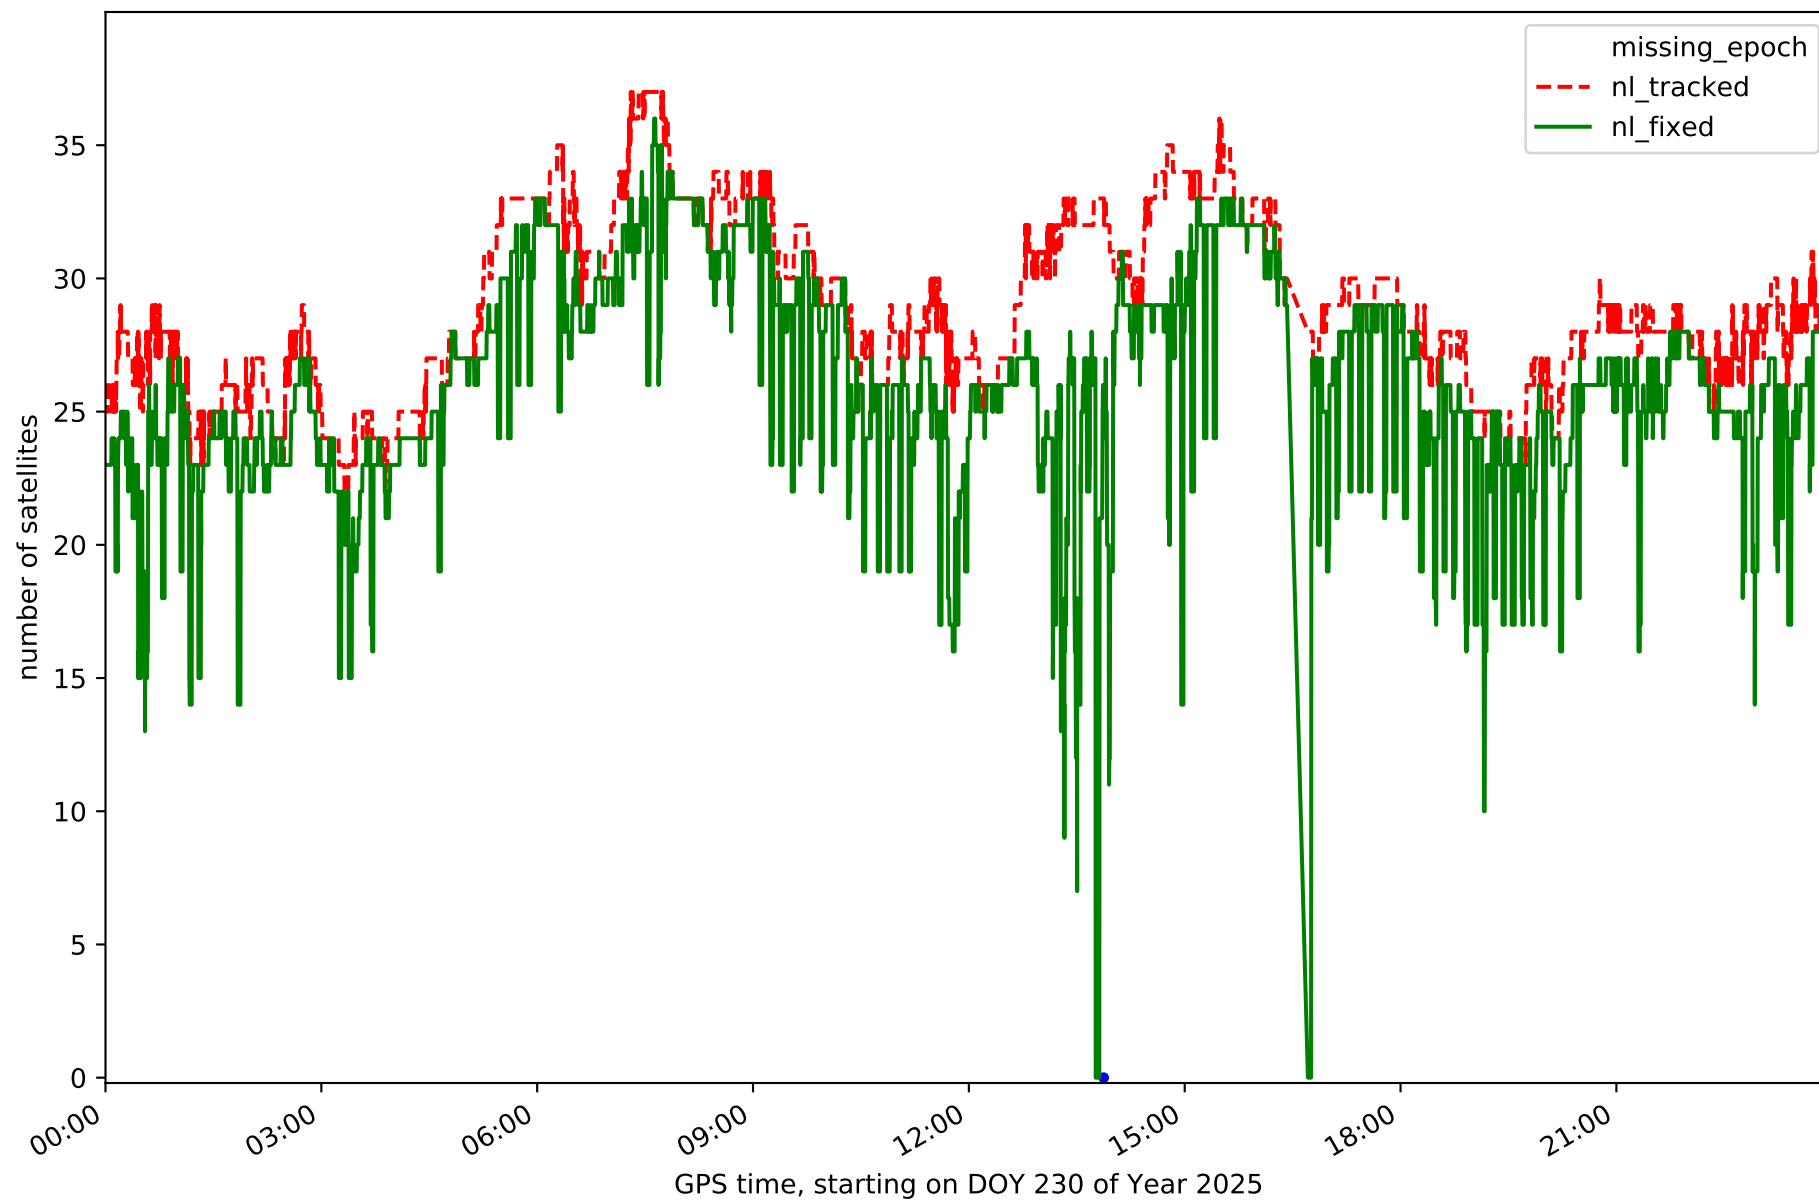


Station LRES in network NT32

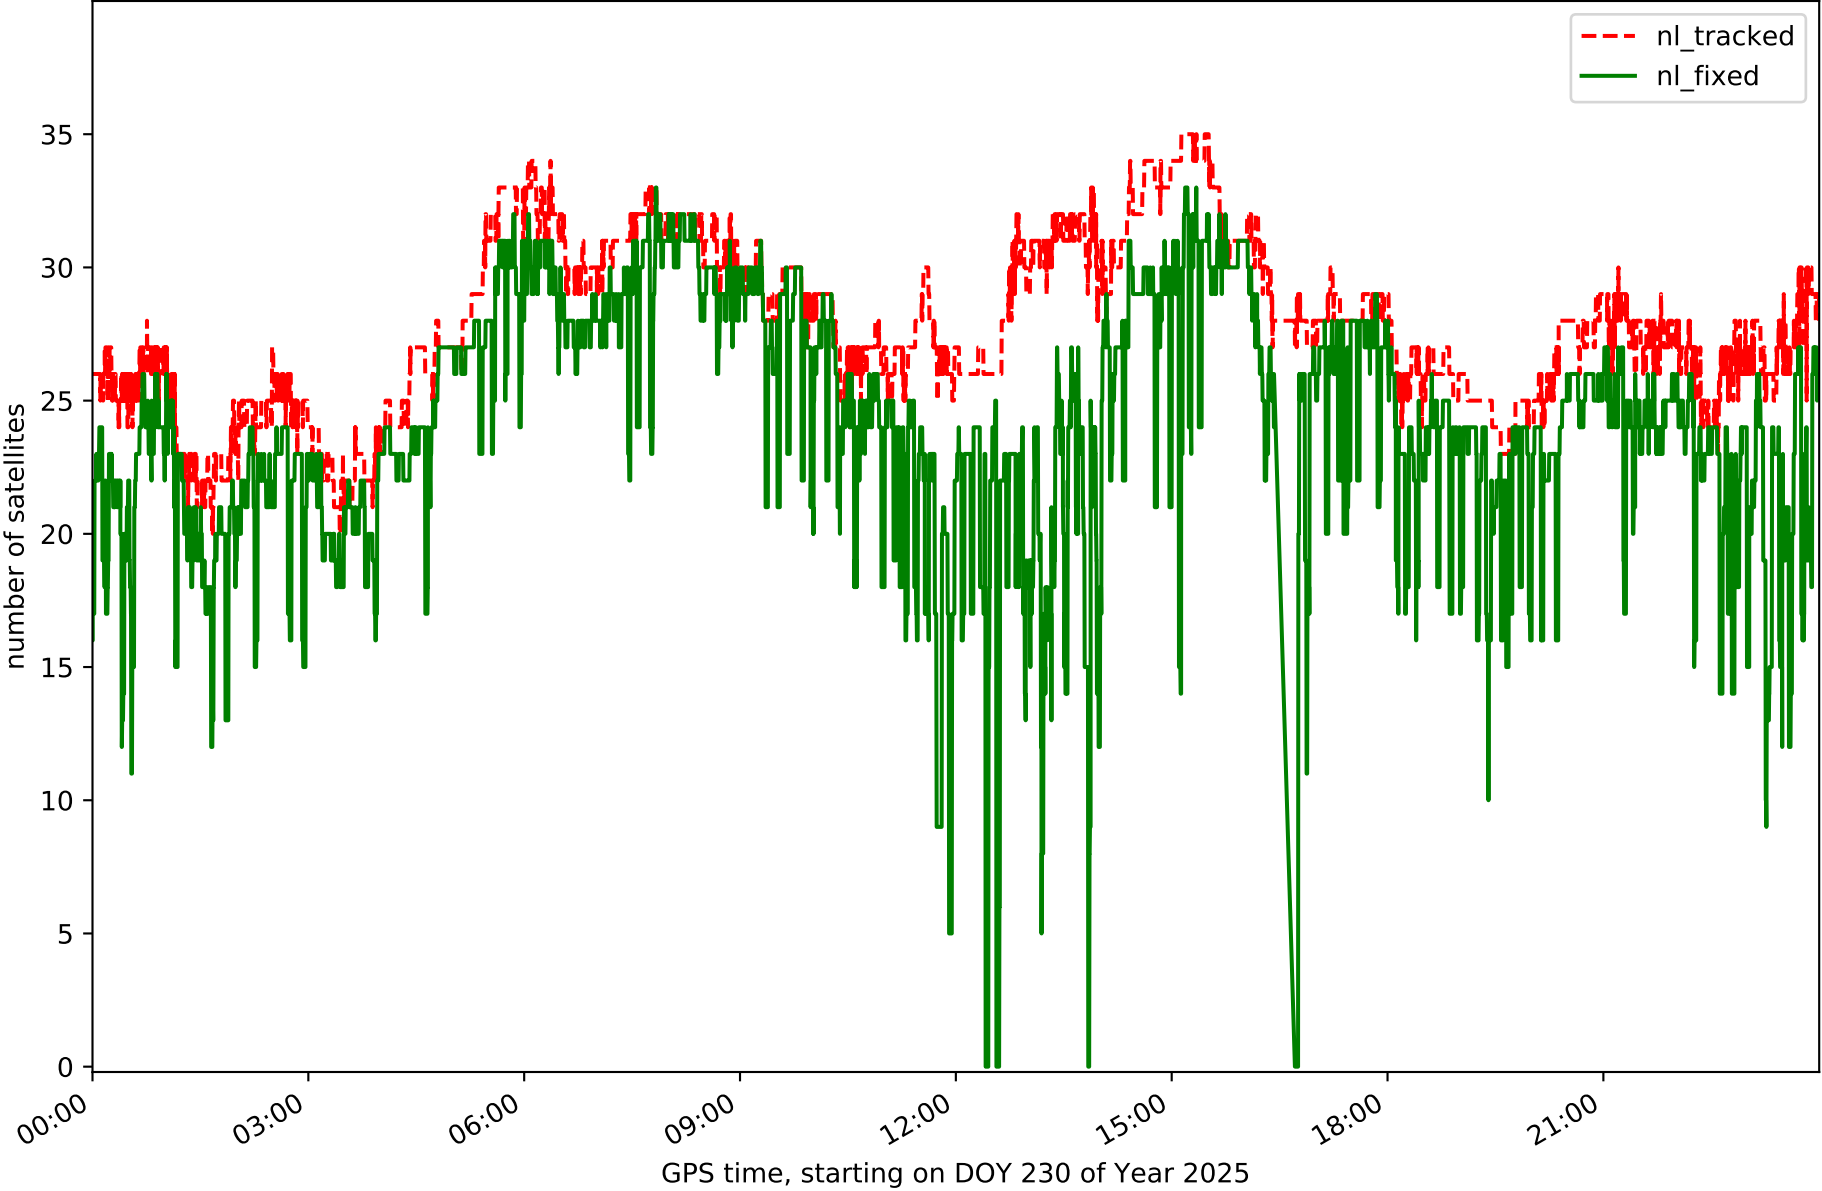


Station TN01 in network NT32

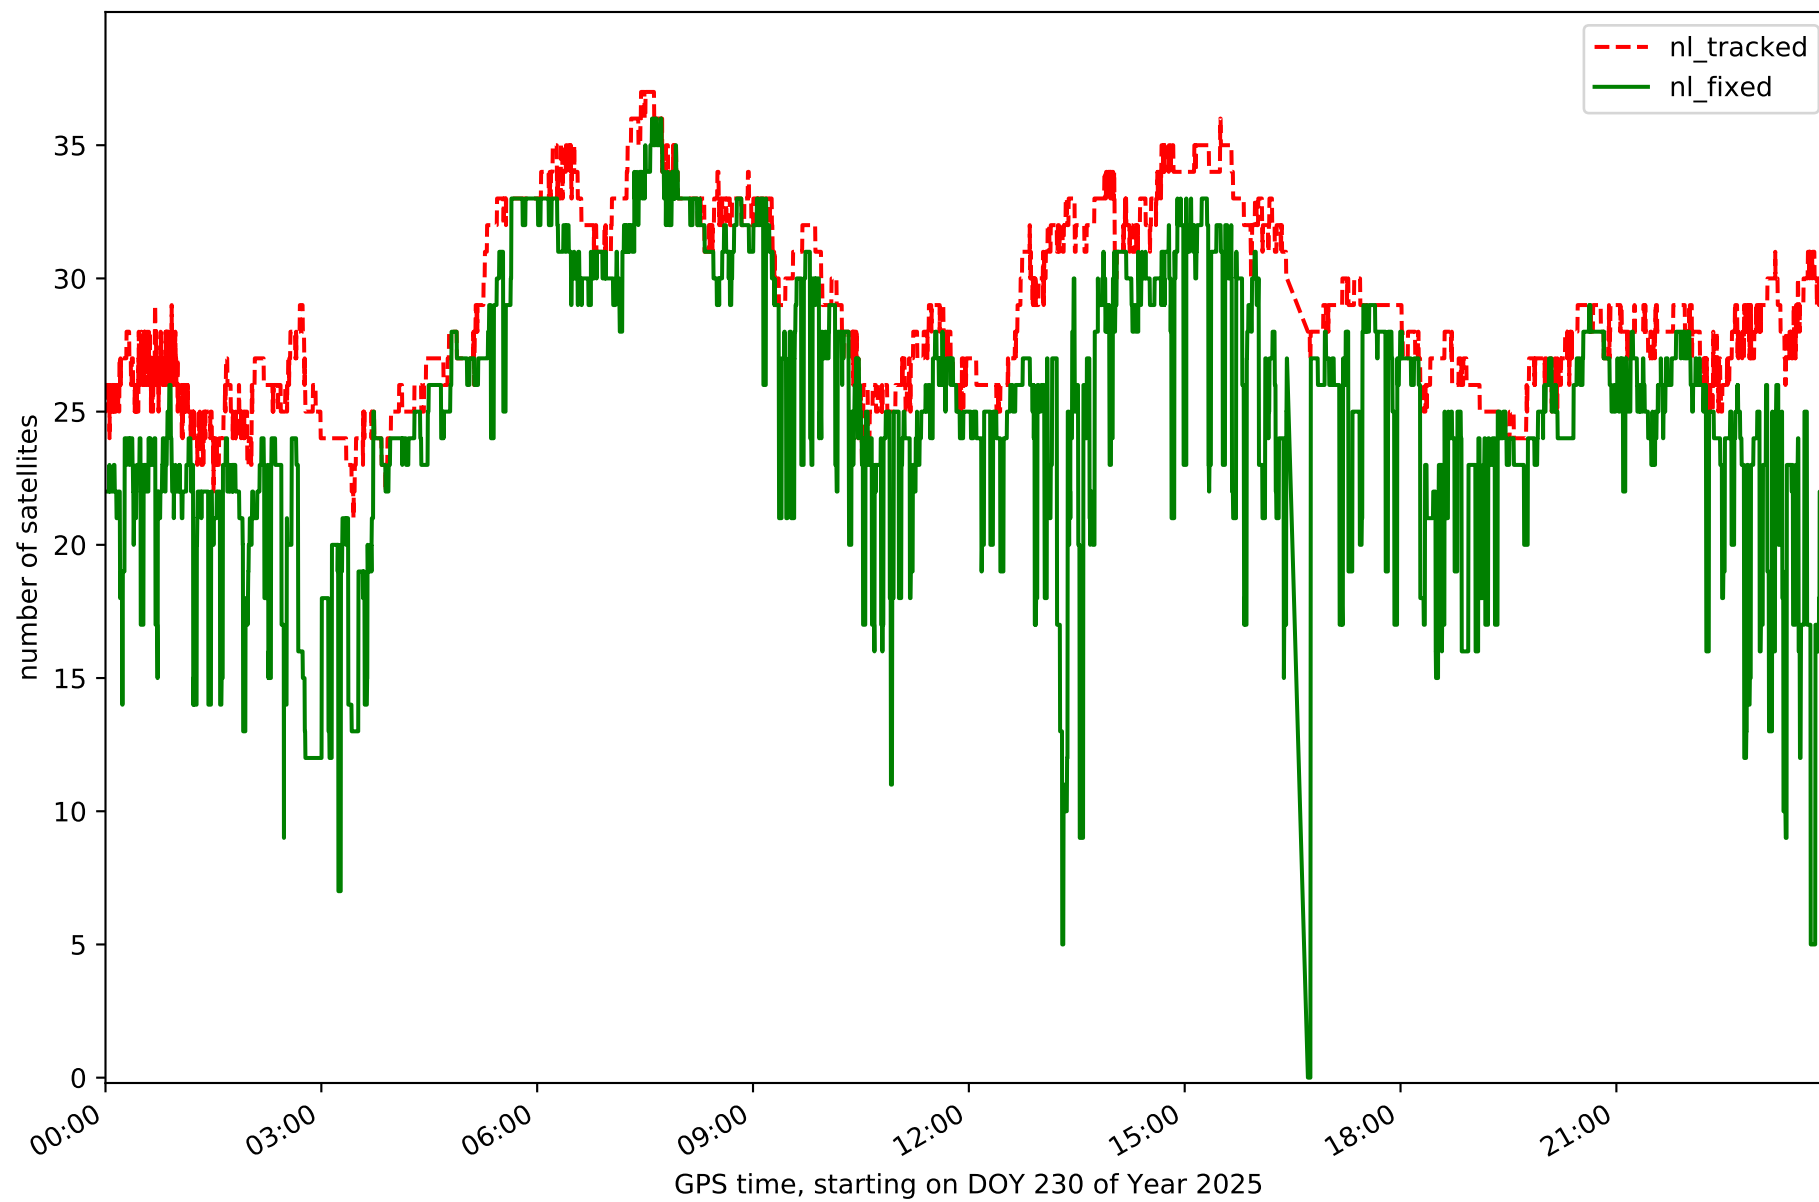


Station TN02 in network NT32

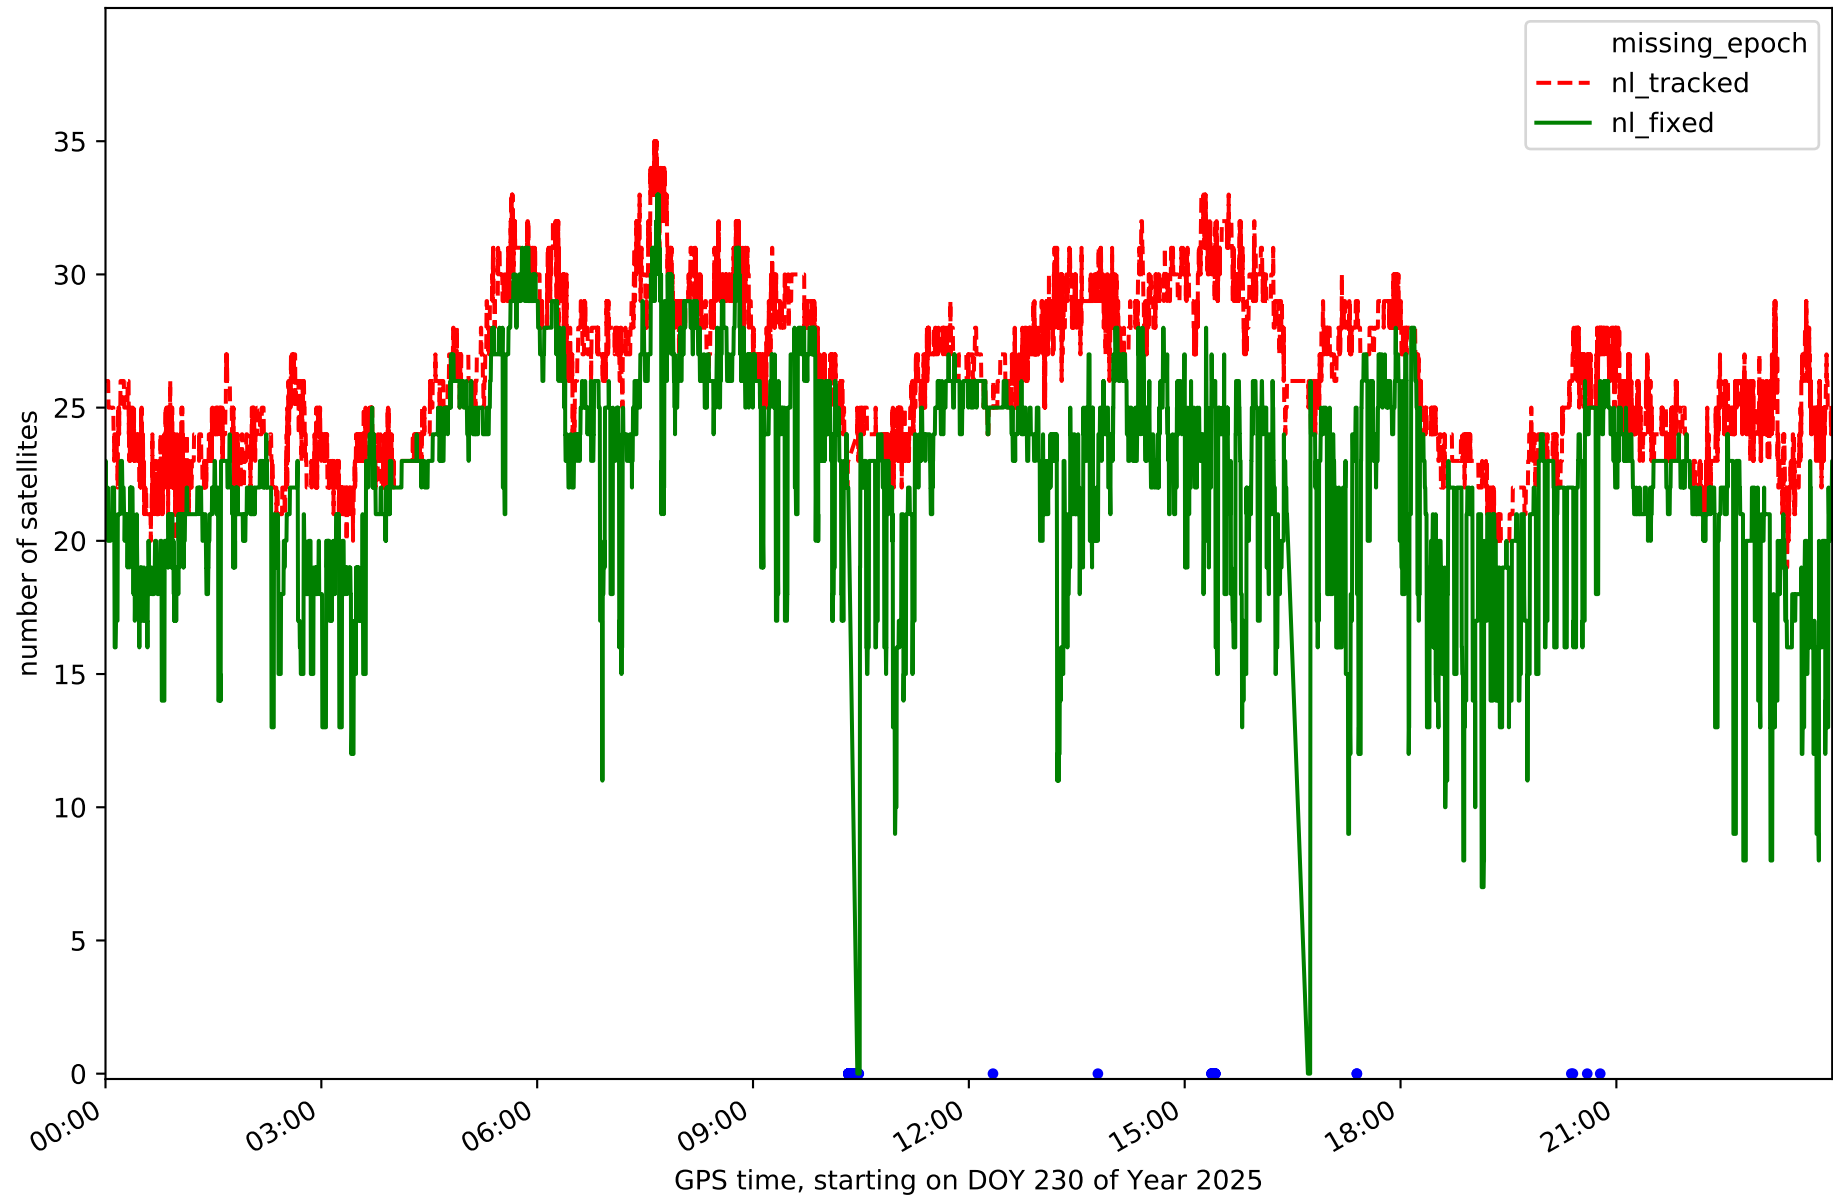


Station TN03 in network NT32

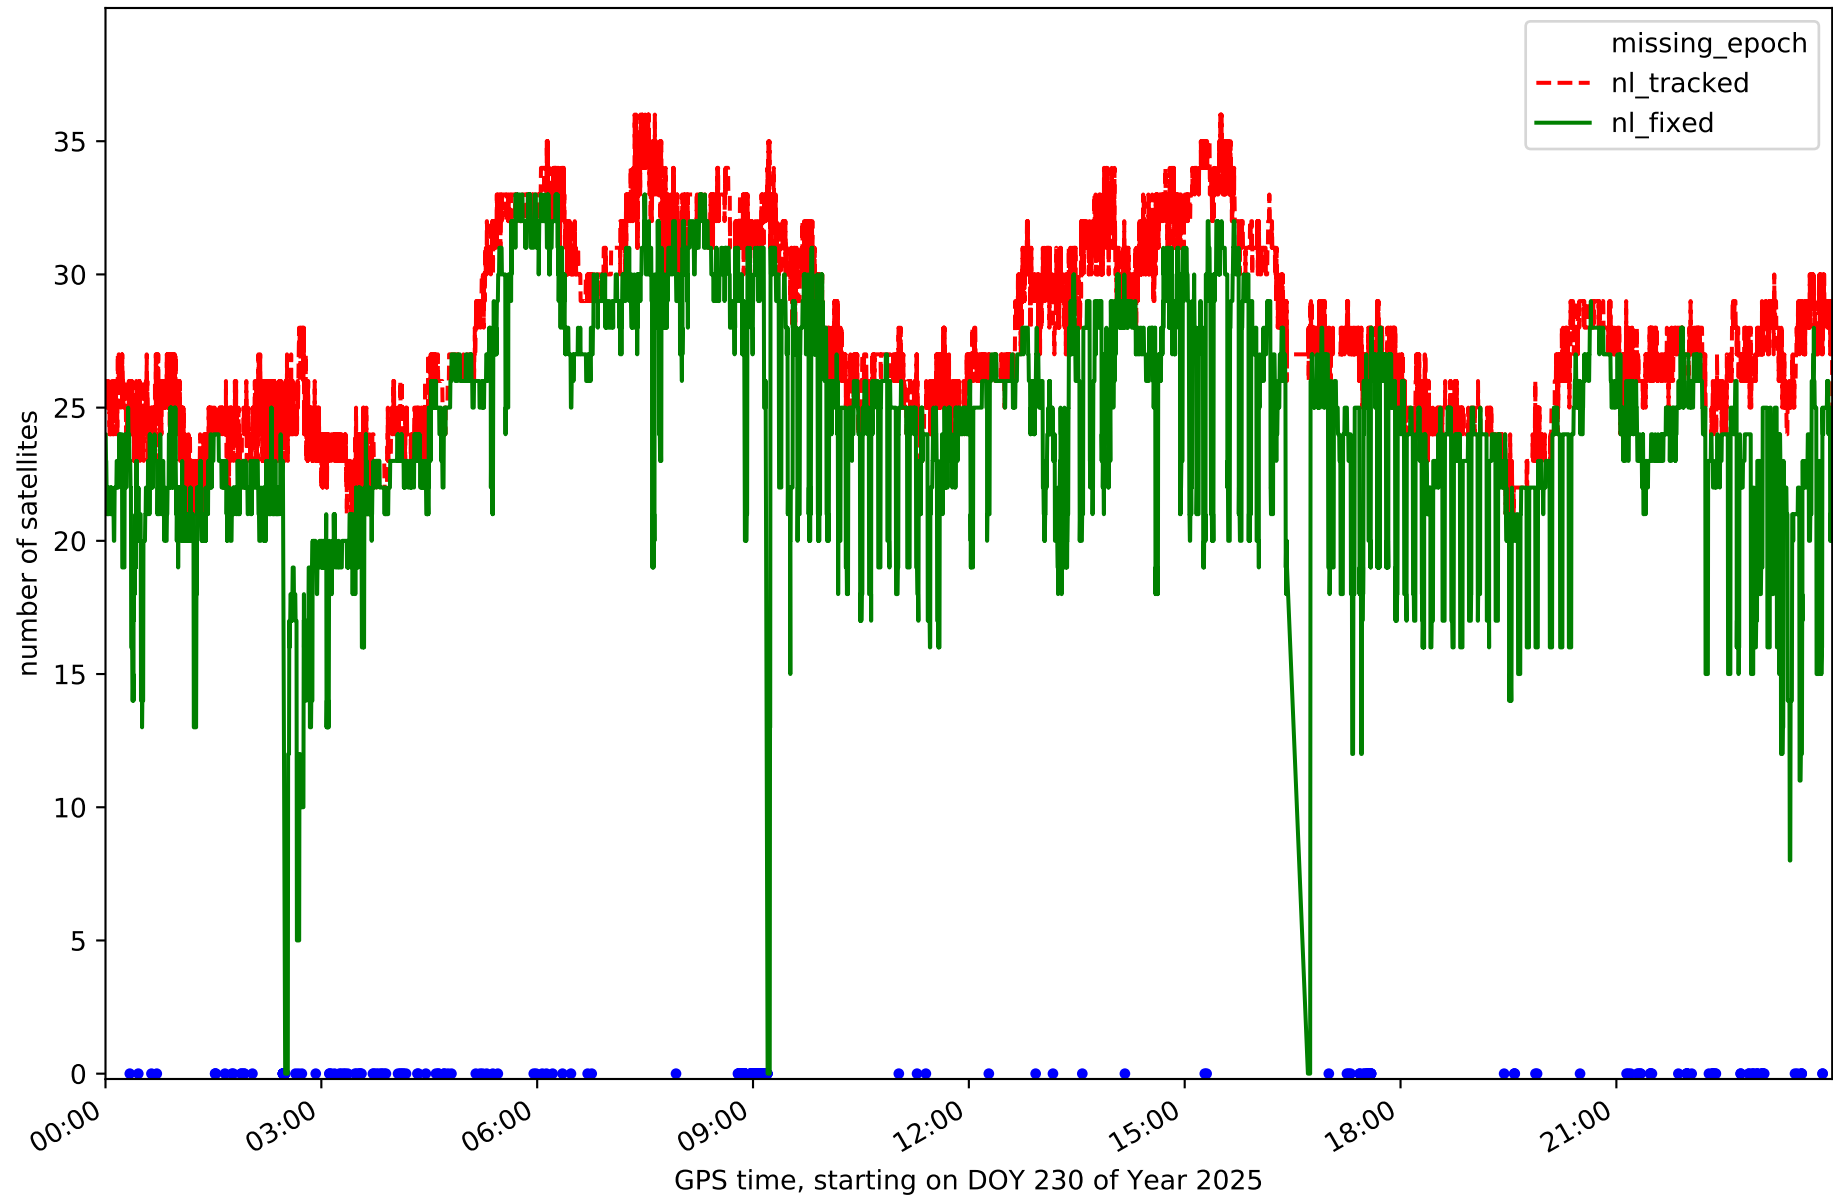


Station TN04 in network NT32

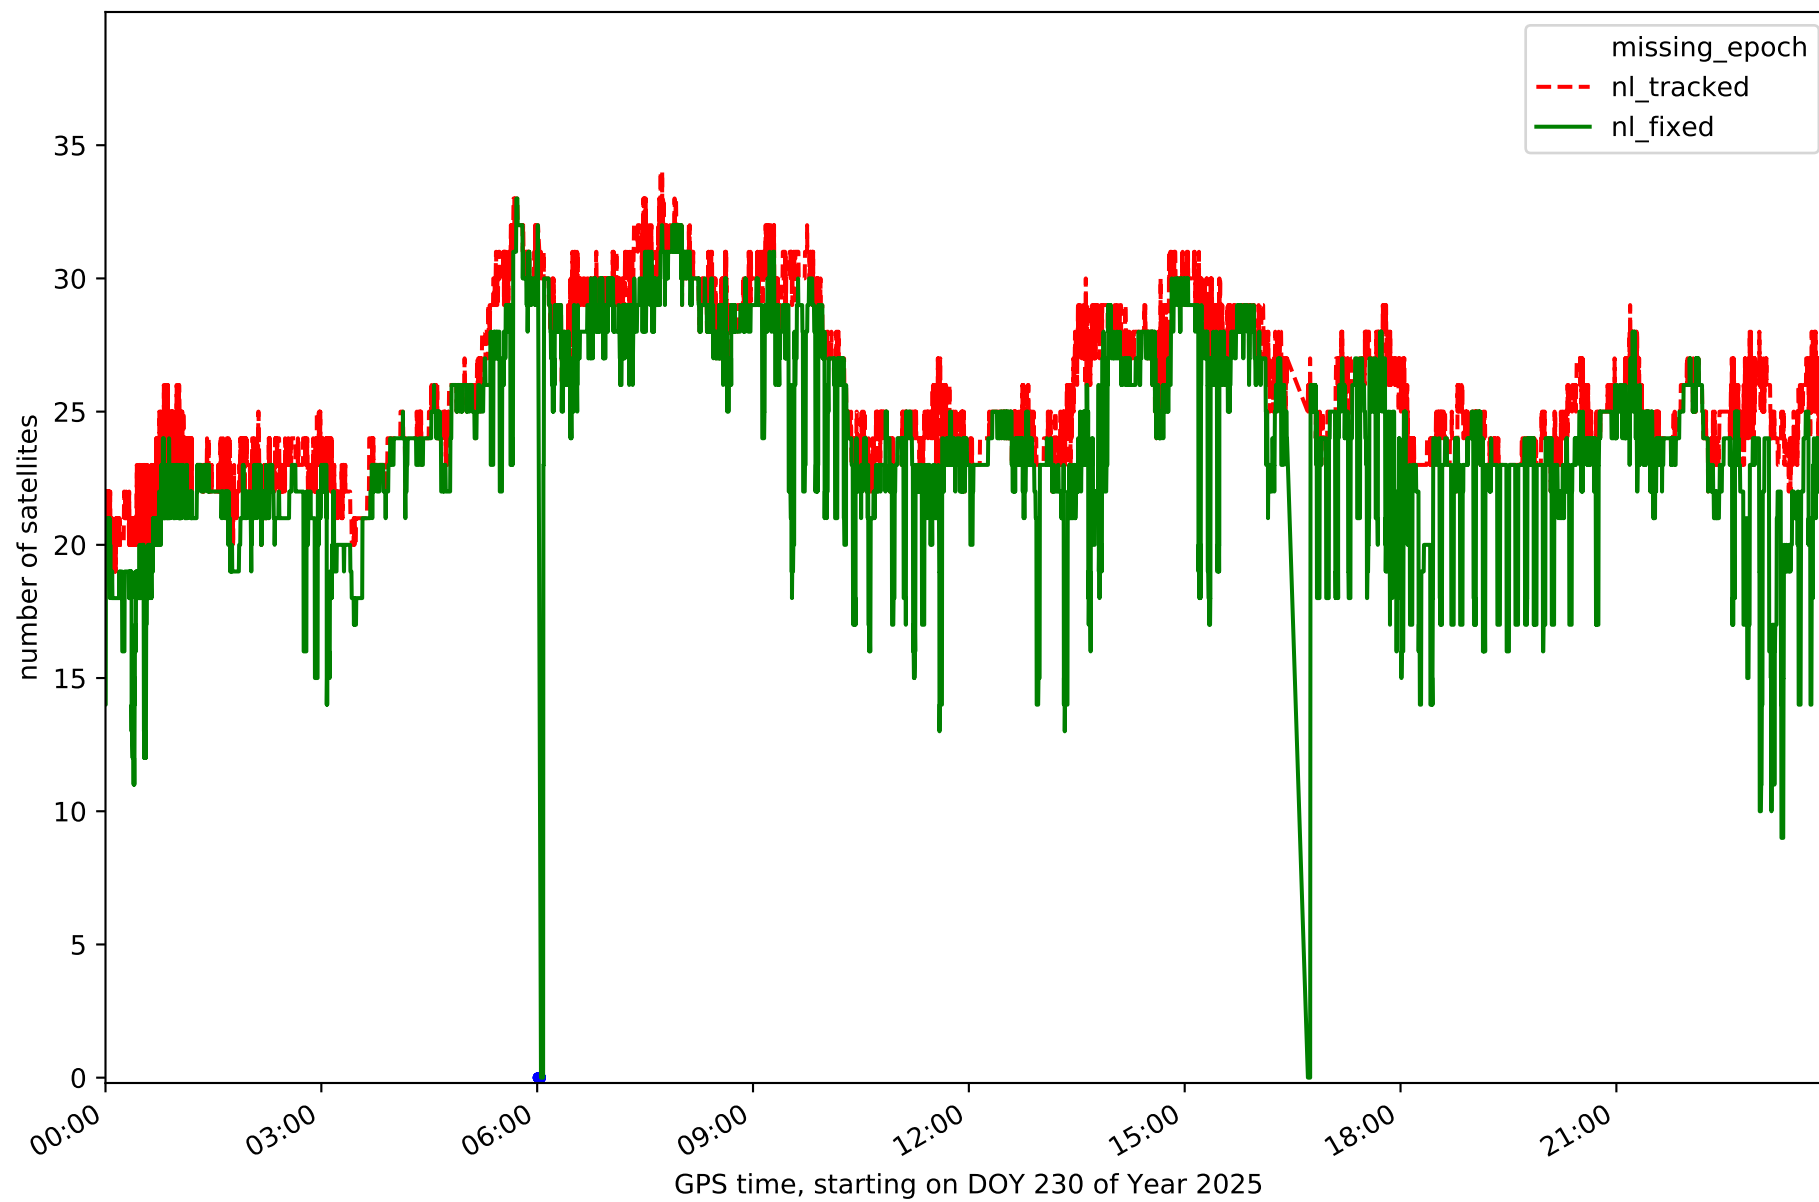


Station TN06 in network NT32

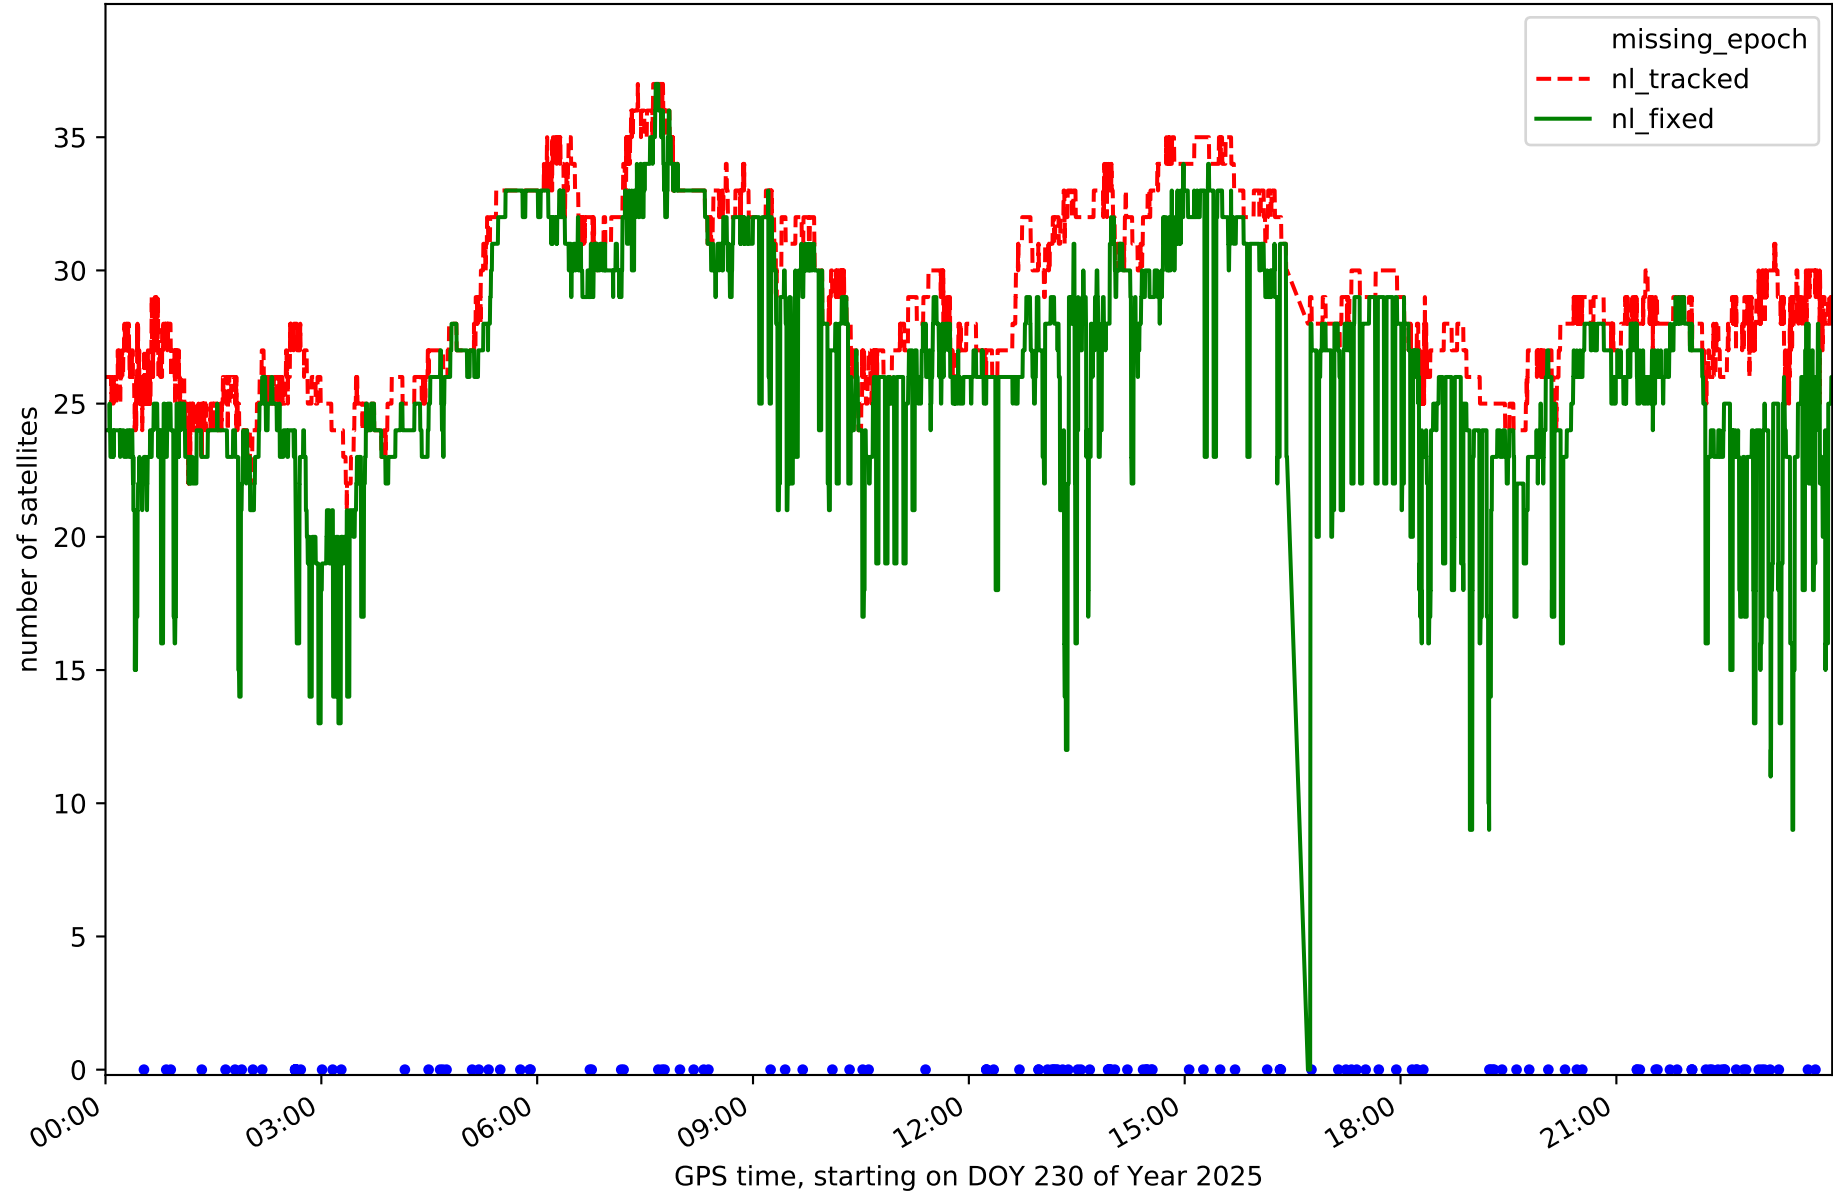


Station TN09 in network NT32

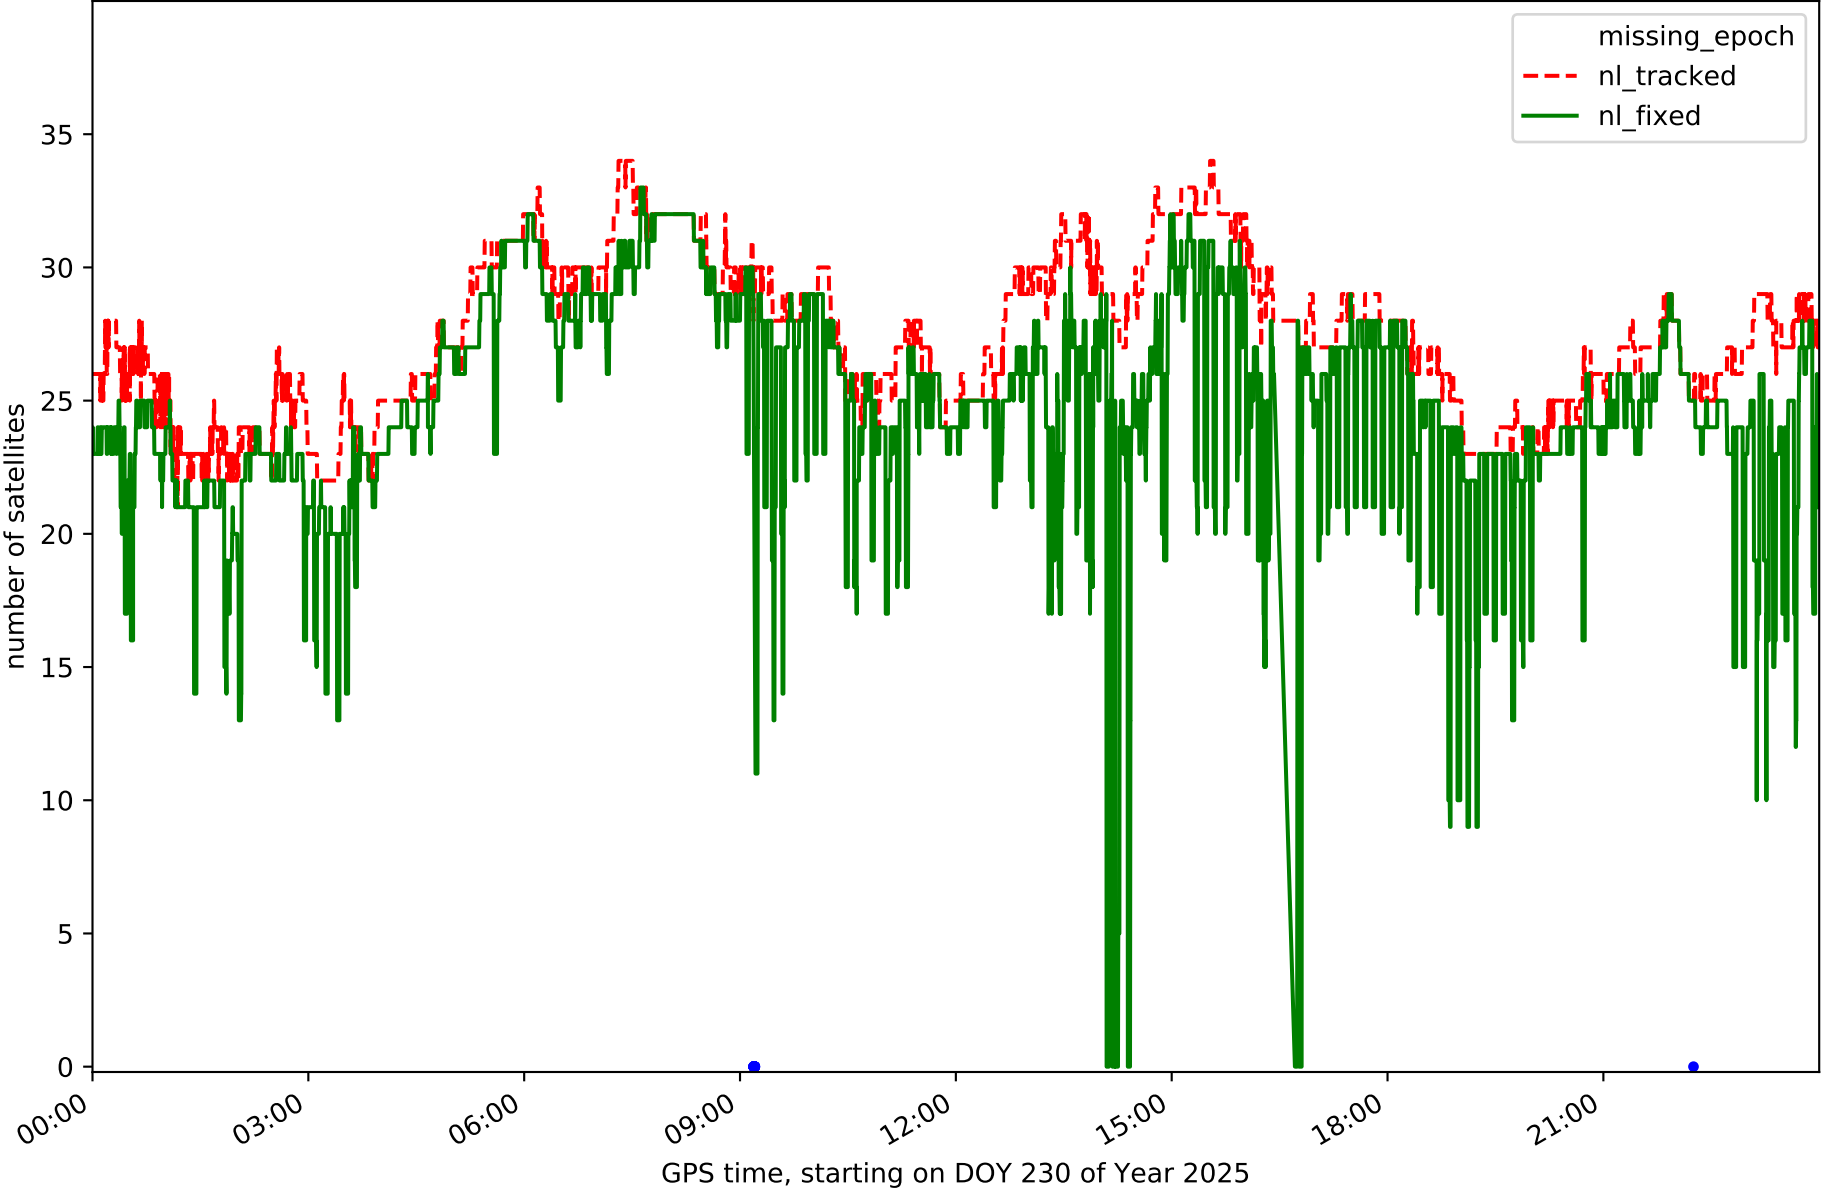


Station TE11 in network NT32

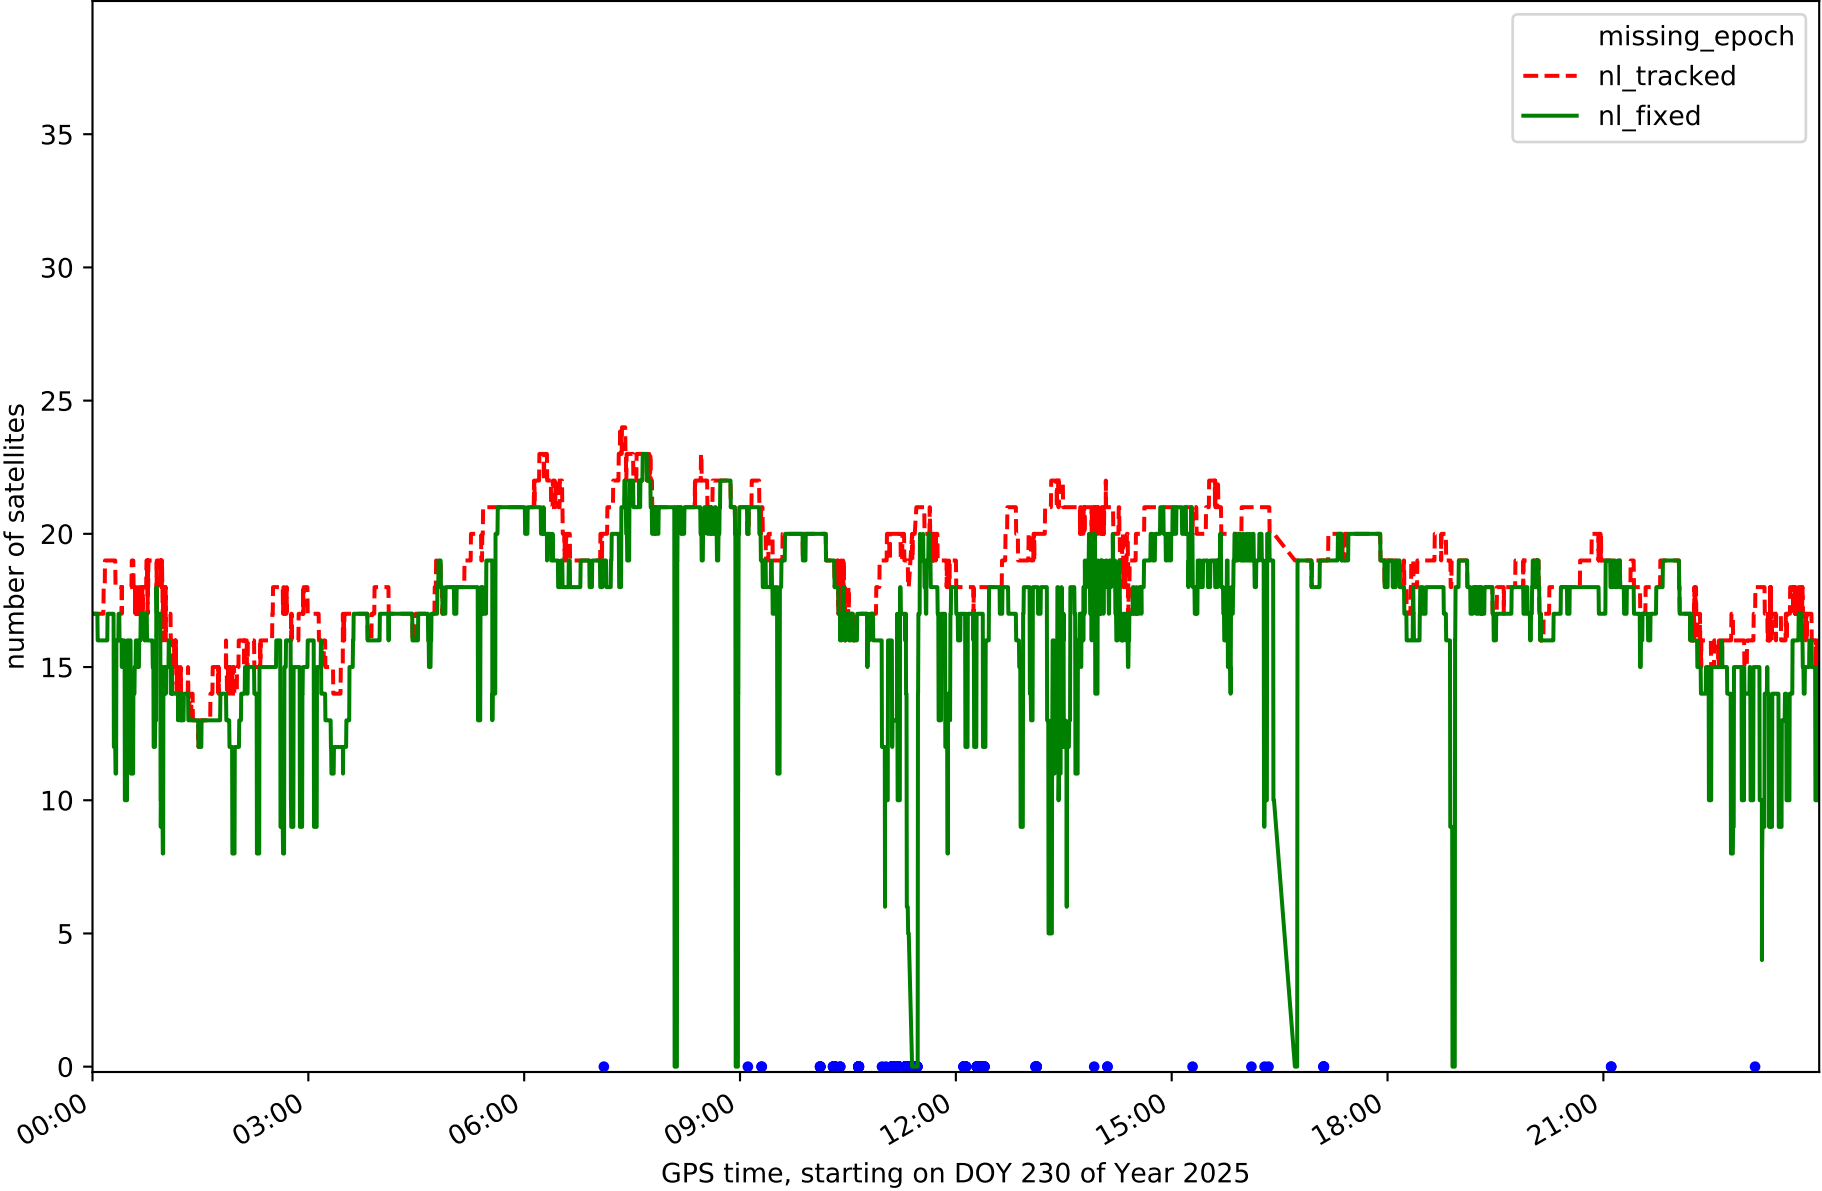


RefCheck for station EH01 in network NT32

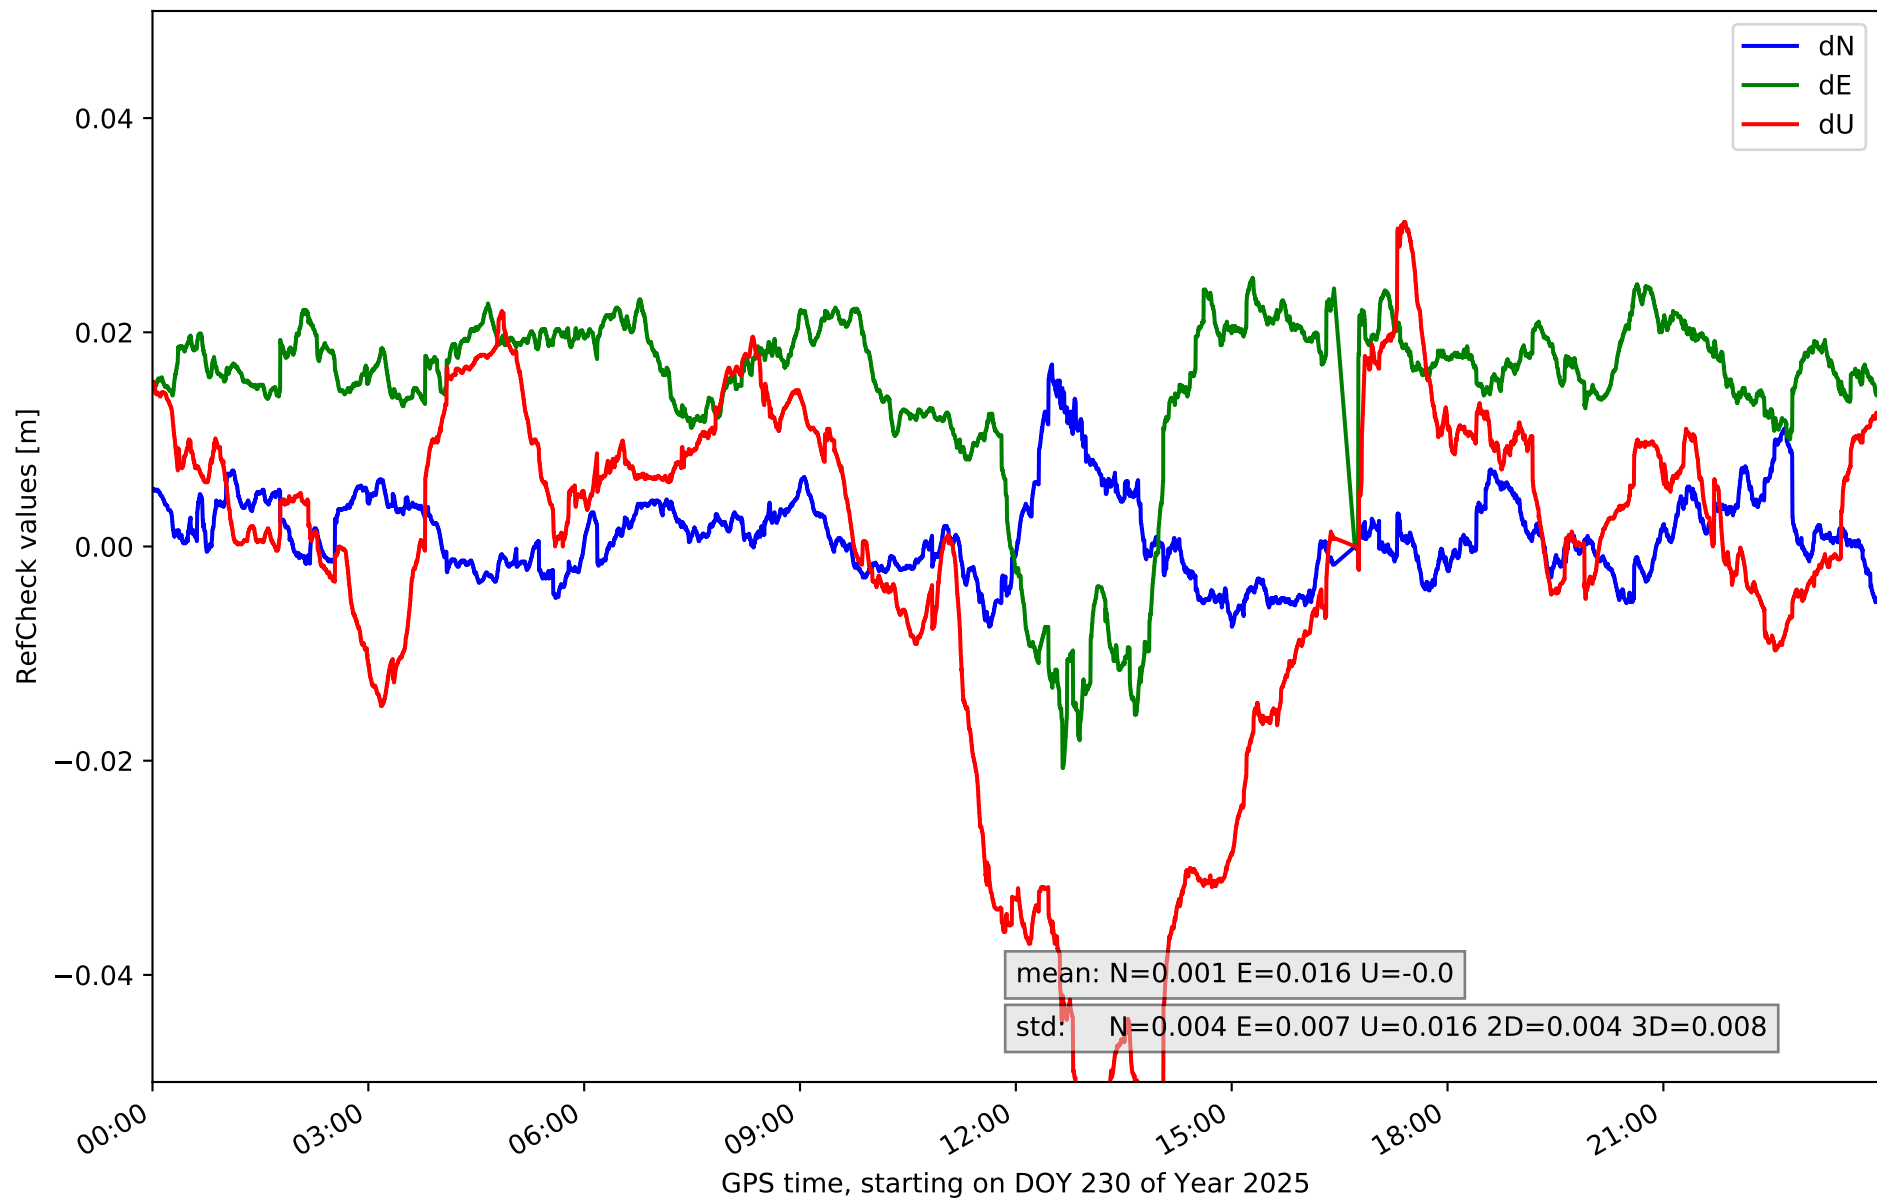


RefCheck for station EH02 in network NT32

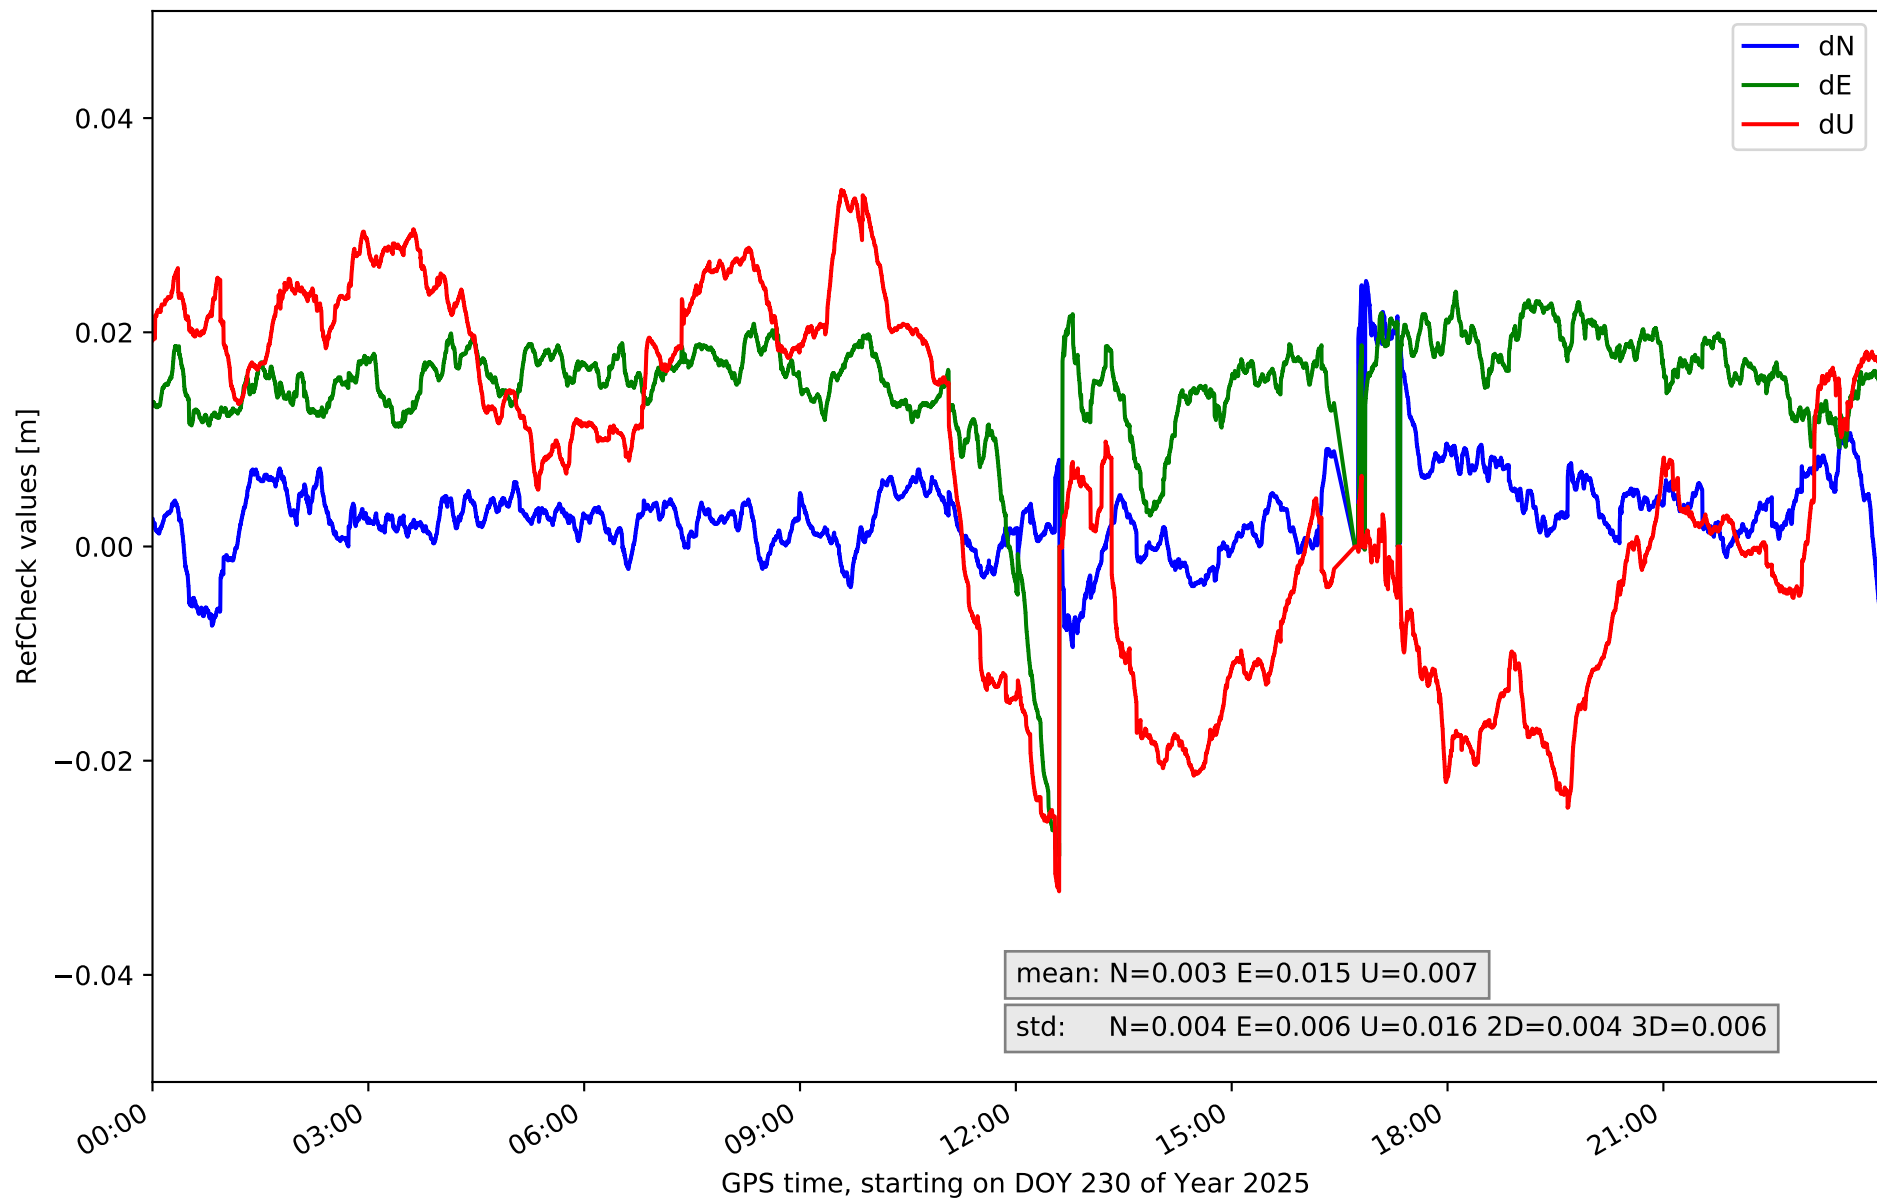


RefCheck for station GOM1 in network NT32

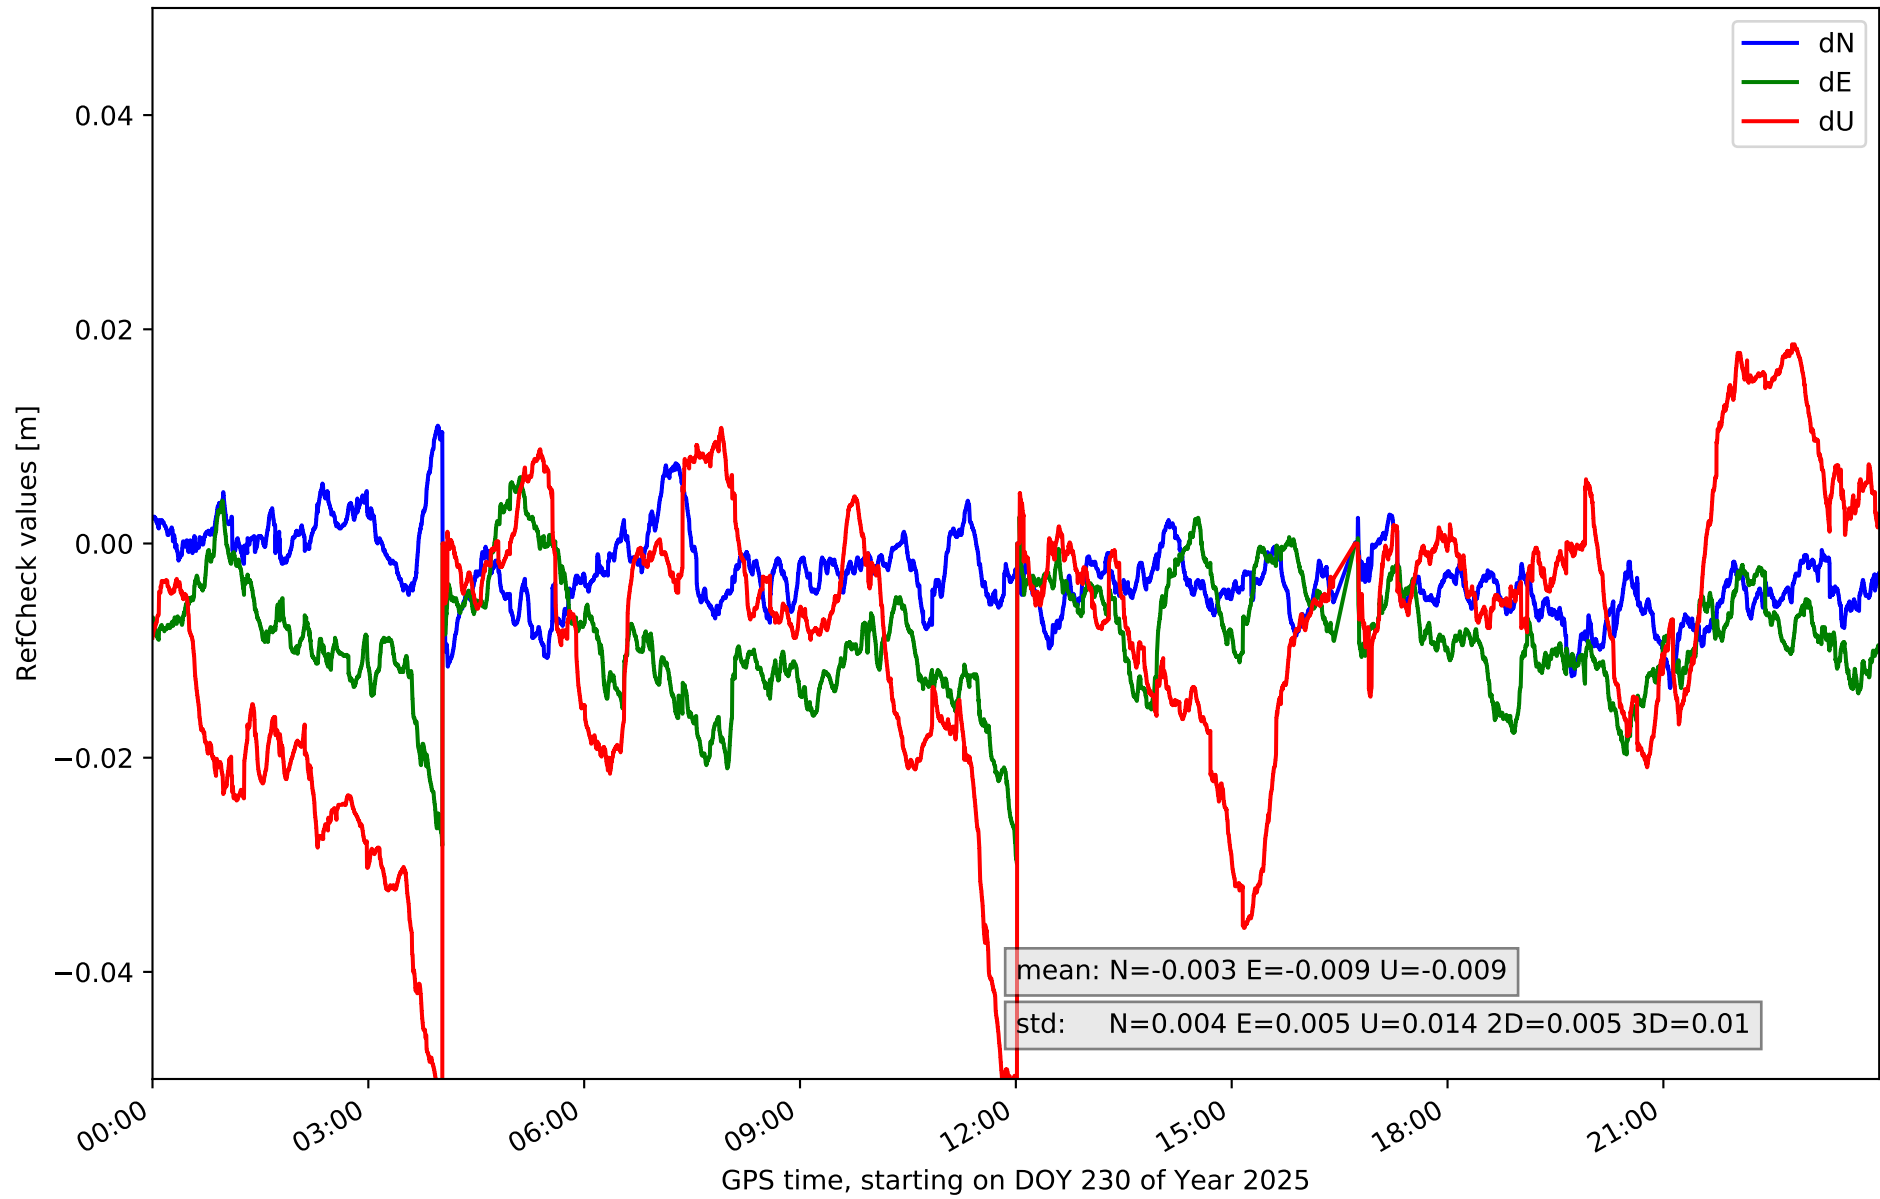


RefCheck for station IZAN in network NT32

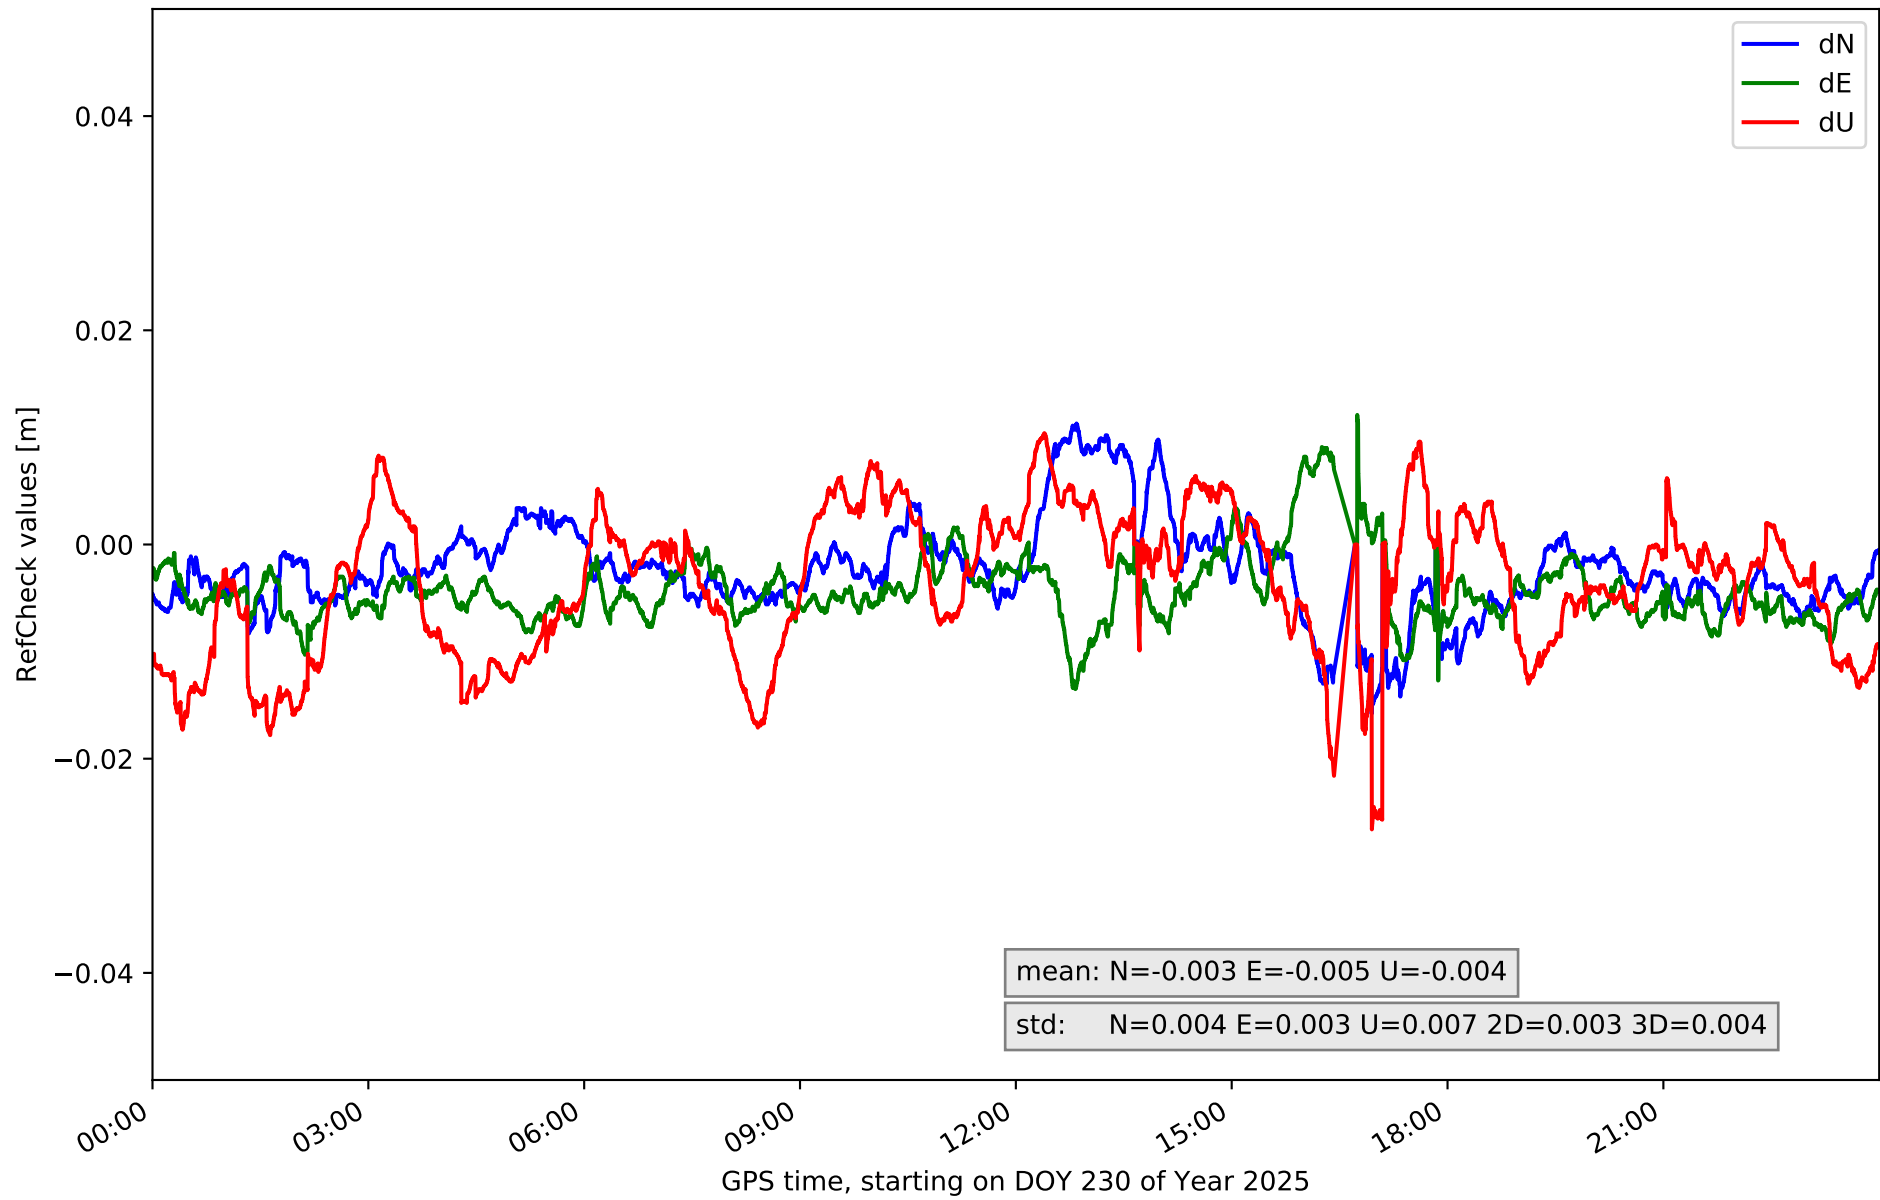


RefCheck for station LP01 in network NT32

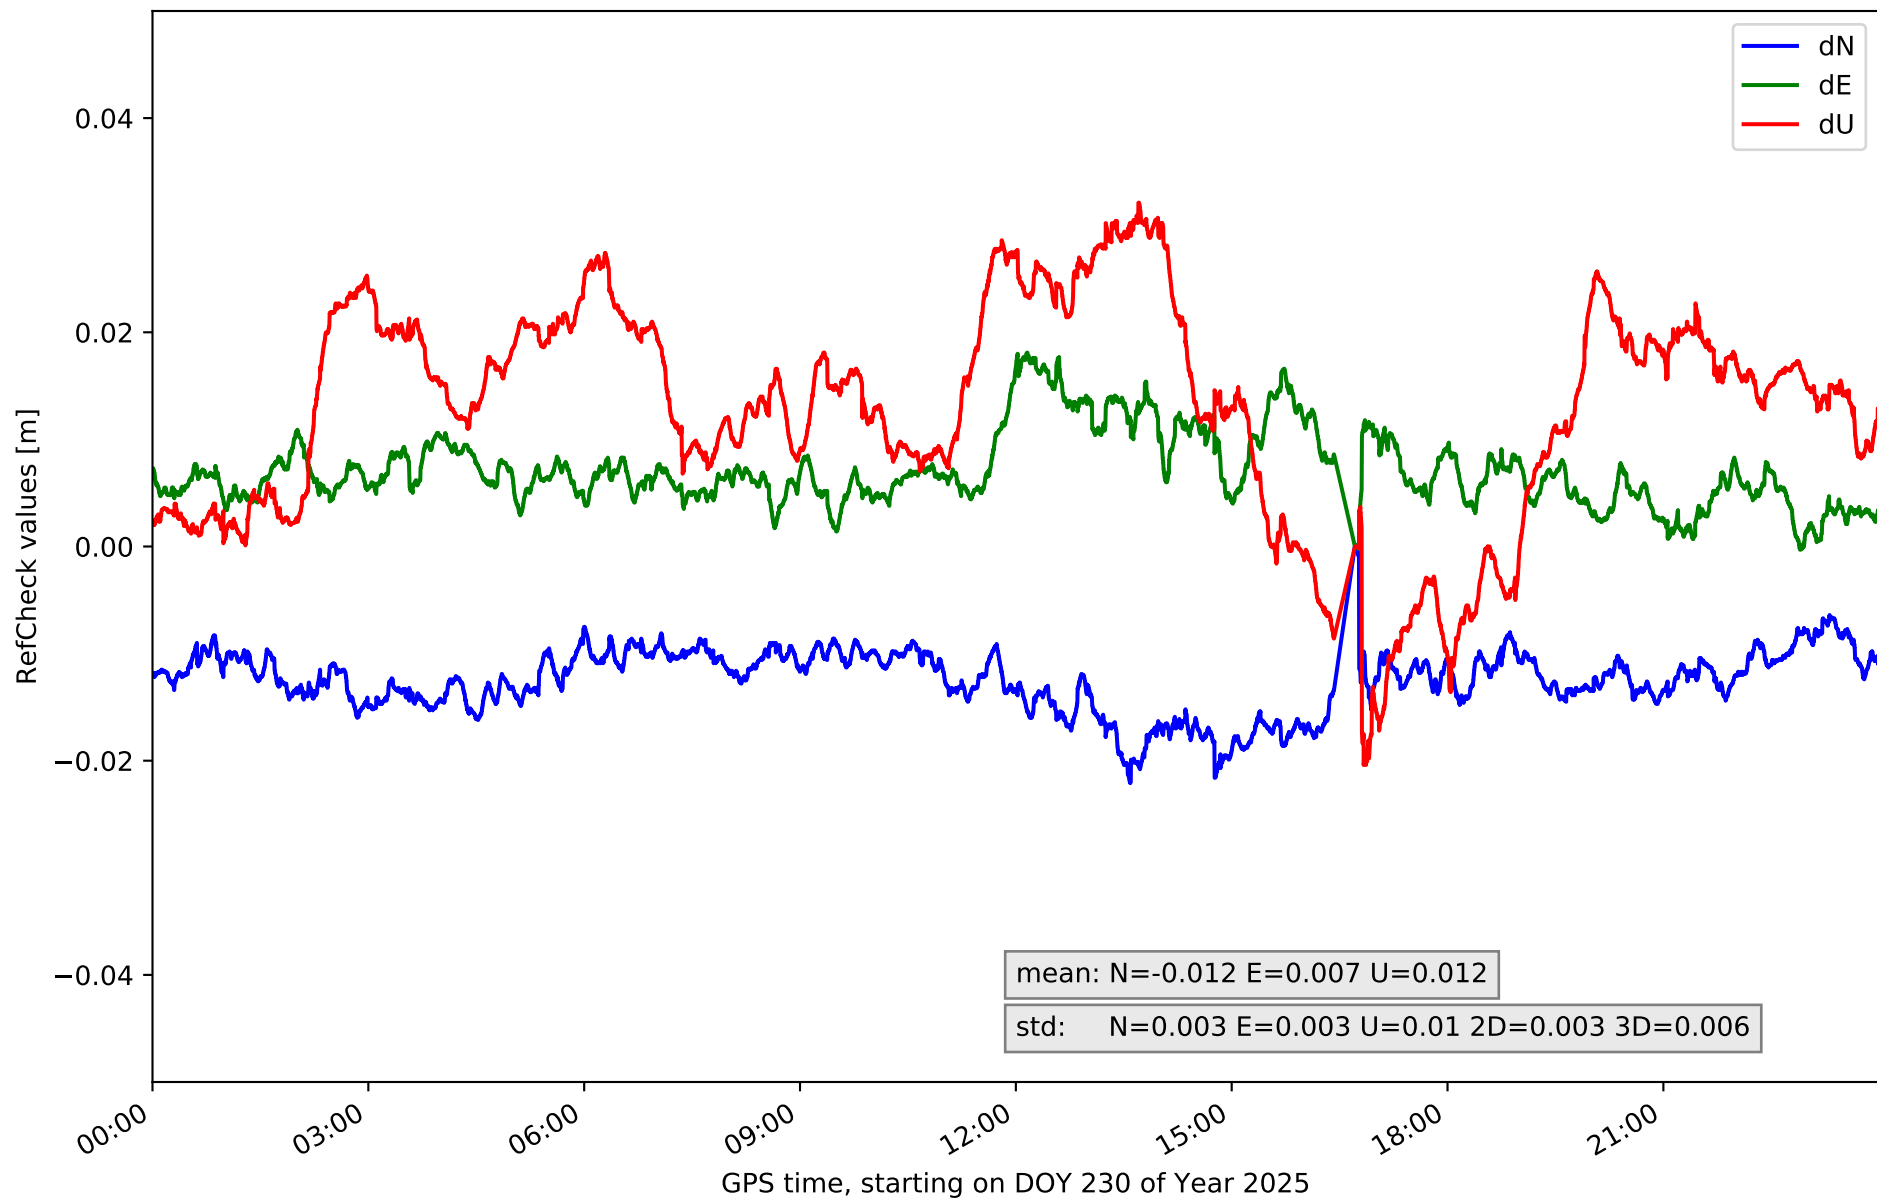


RefCheck for station LP03 in network NT32

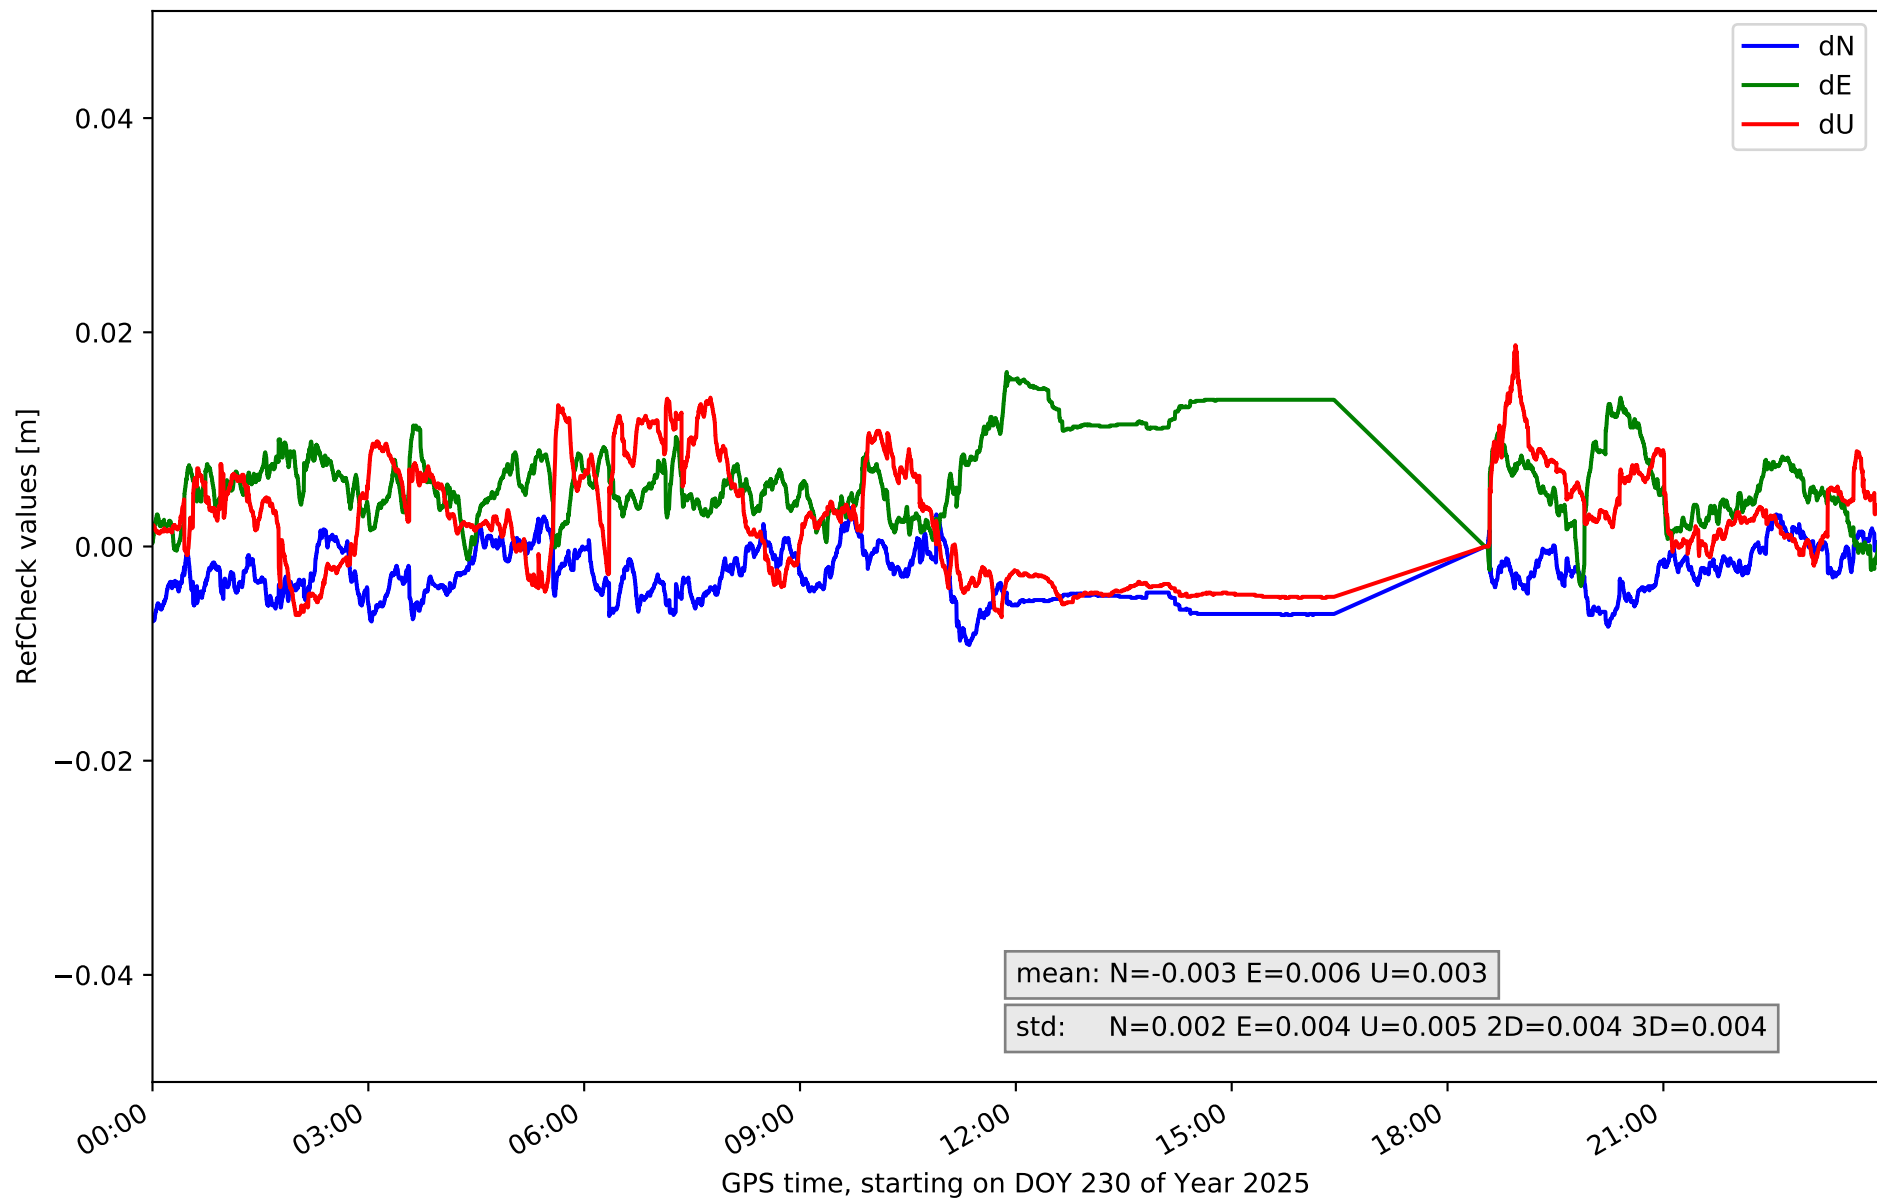


RefCheck for station LPAL in network NT32

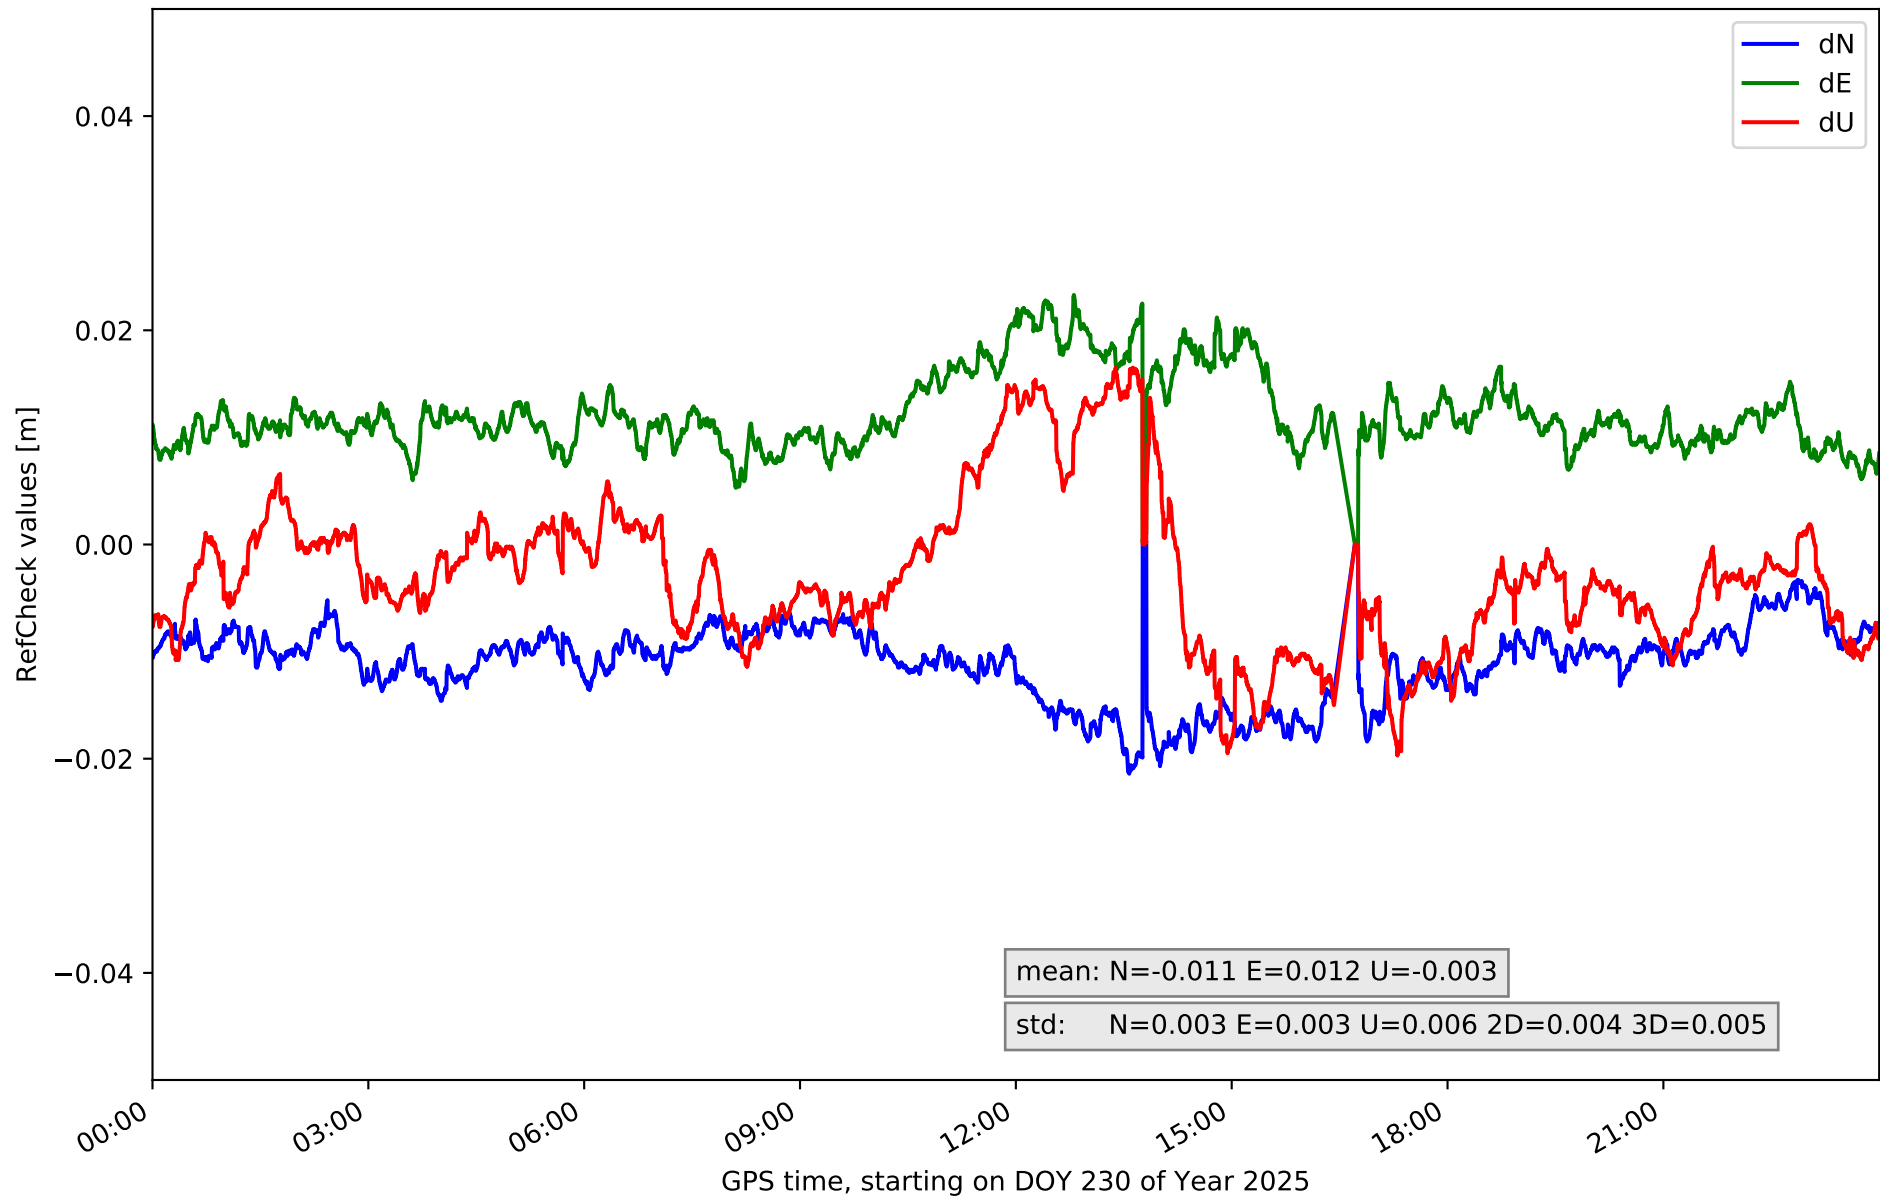


RefCheck for station LRES in network NT32

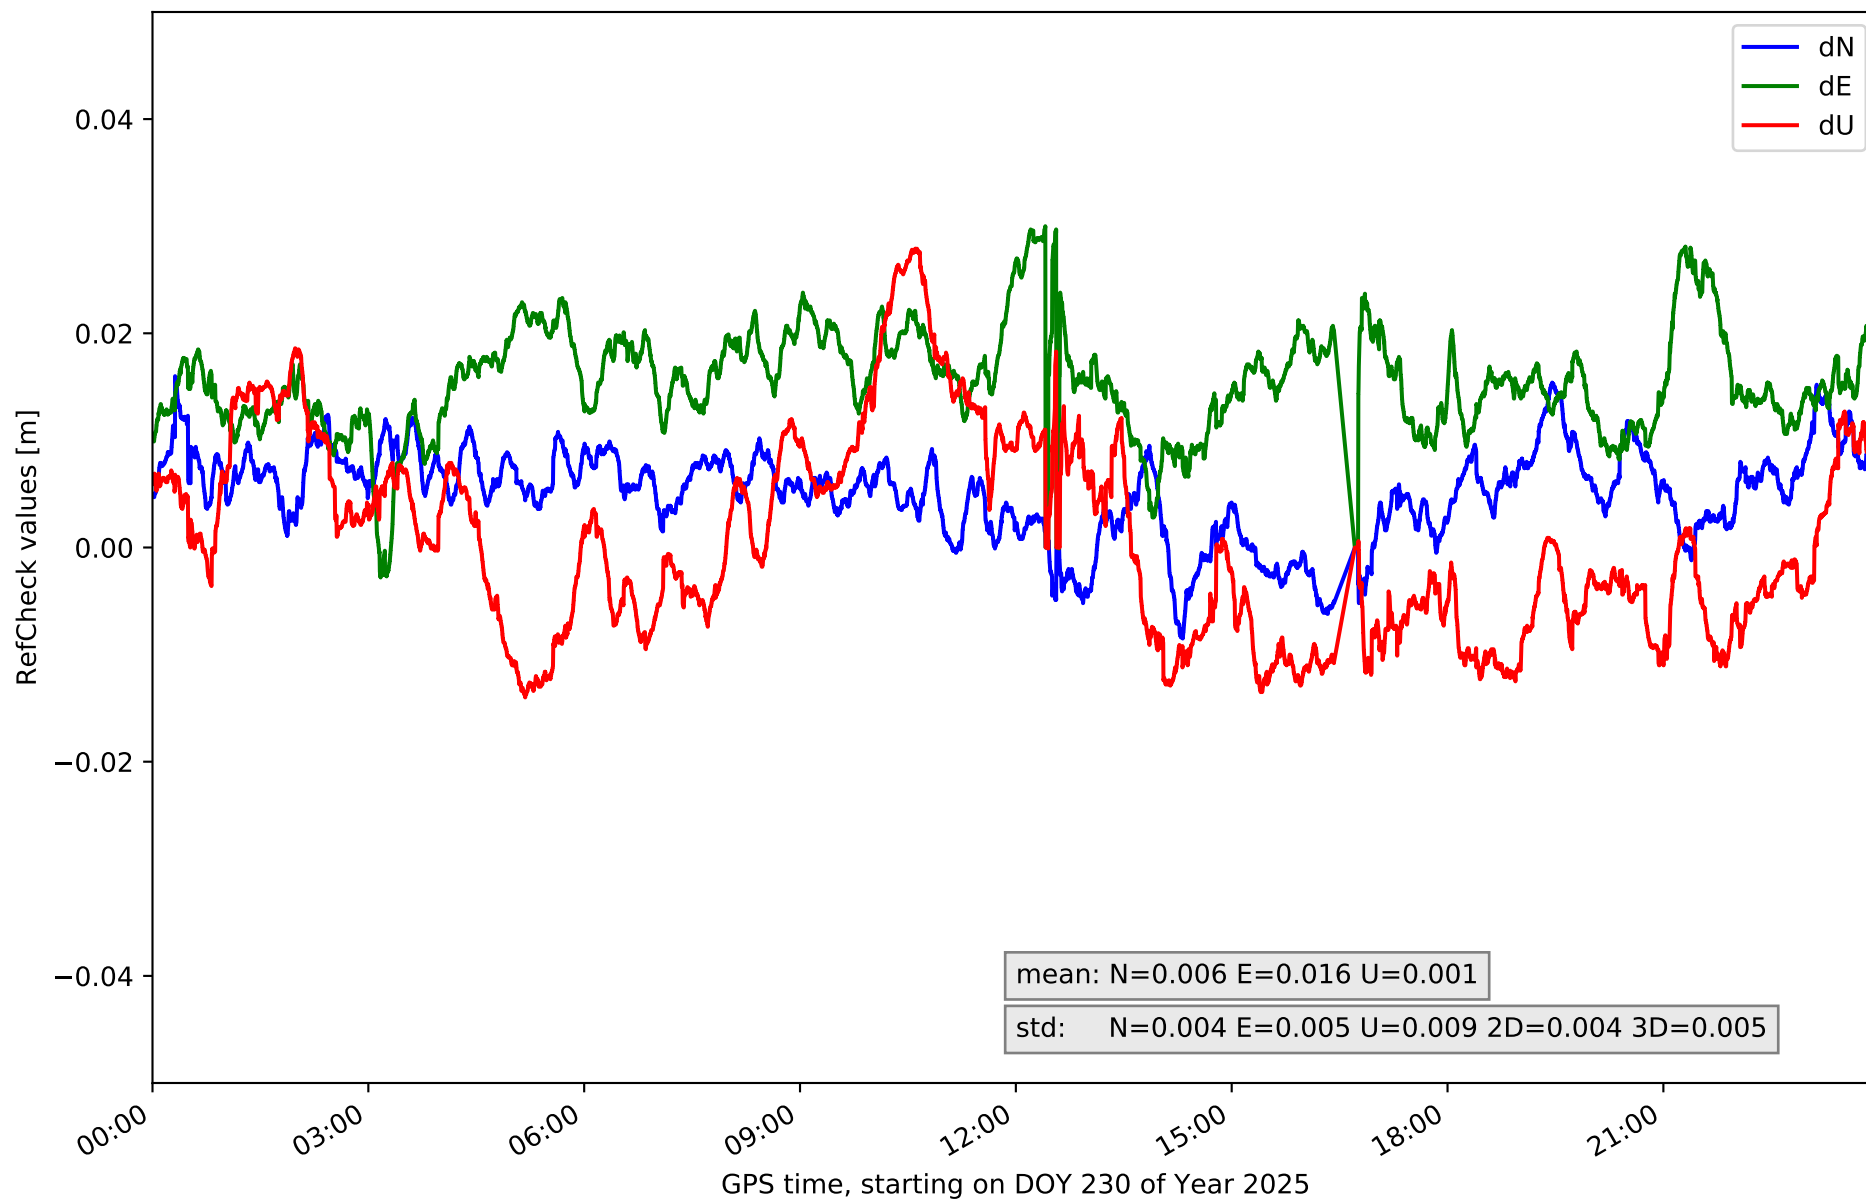


RefCheck for station TN01 in network NT32

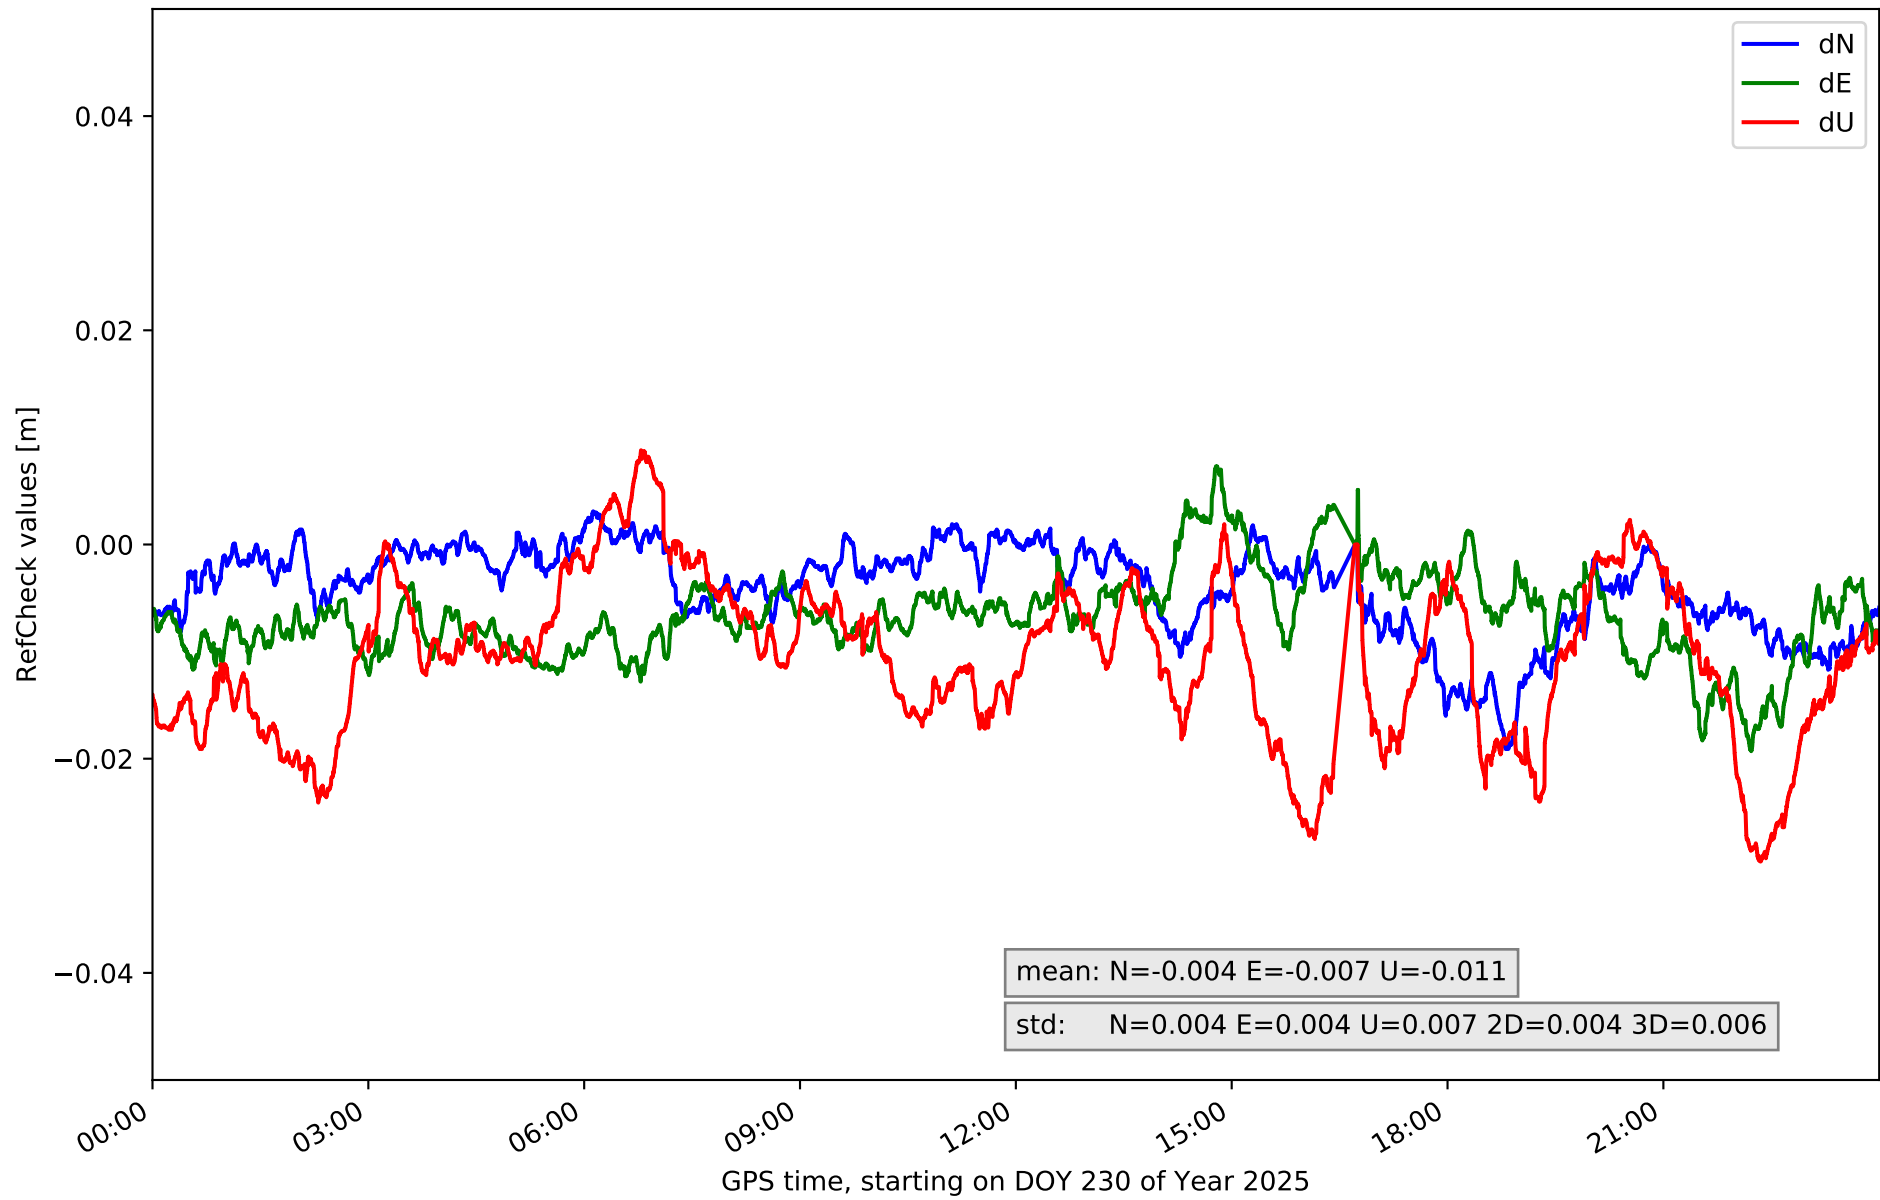


RefCheck for station TN02 in network NT32

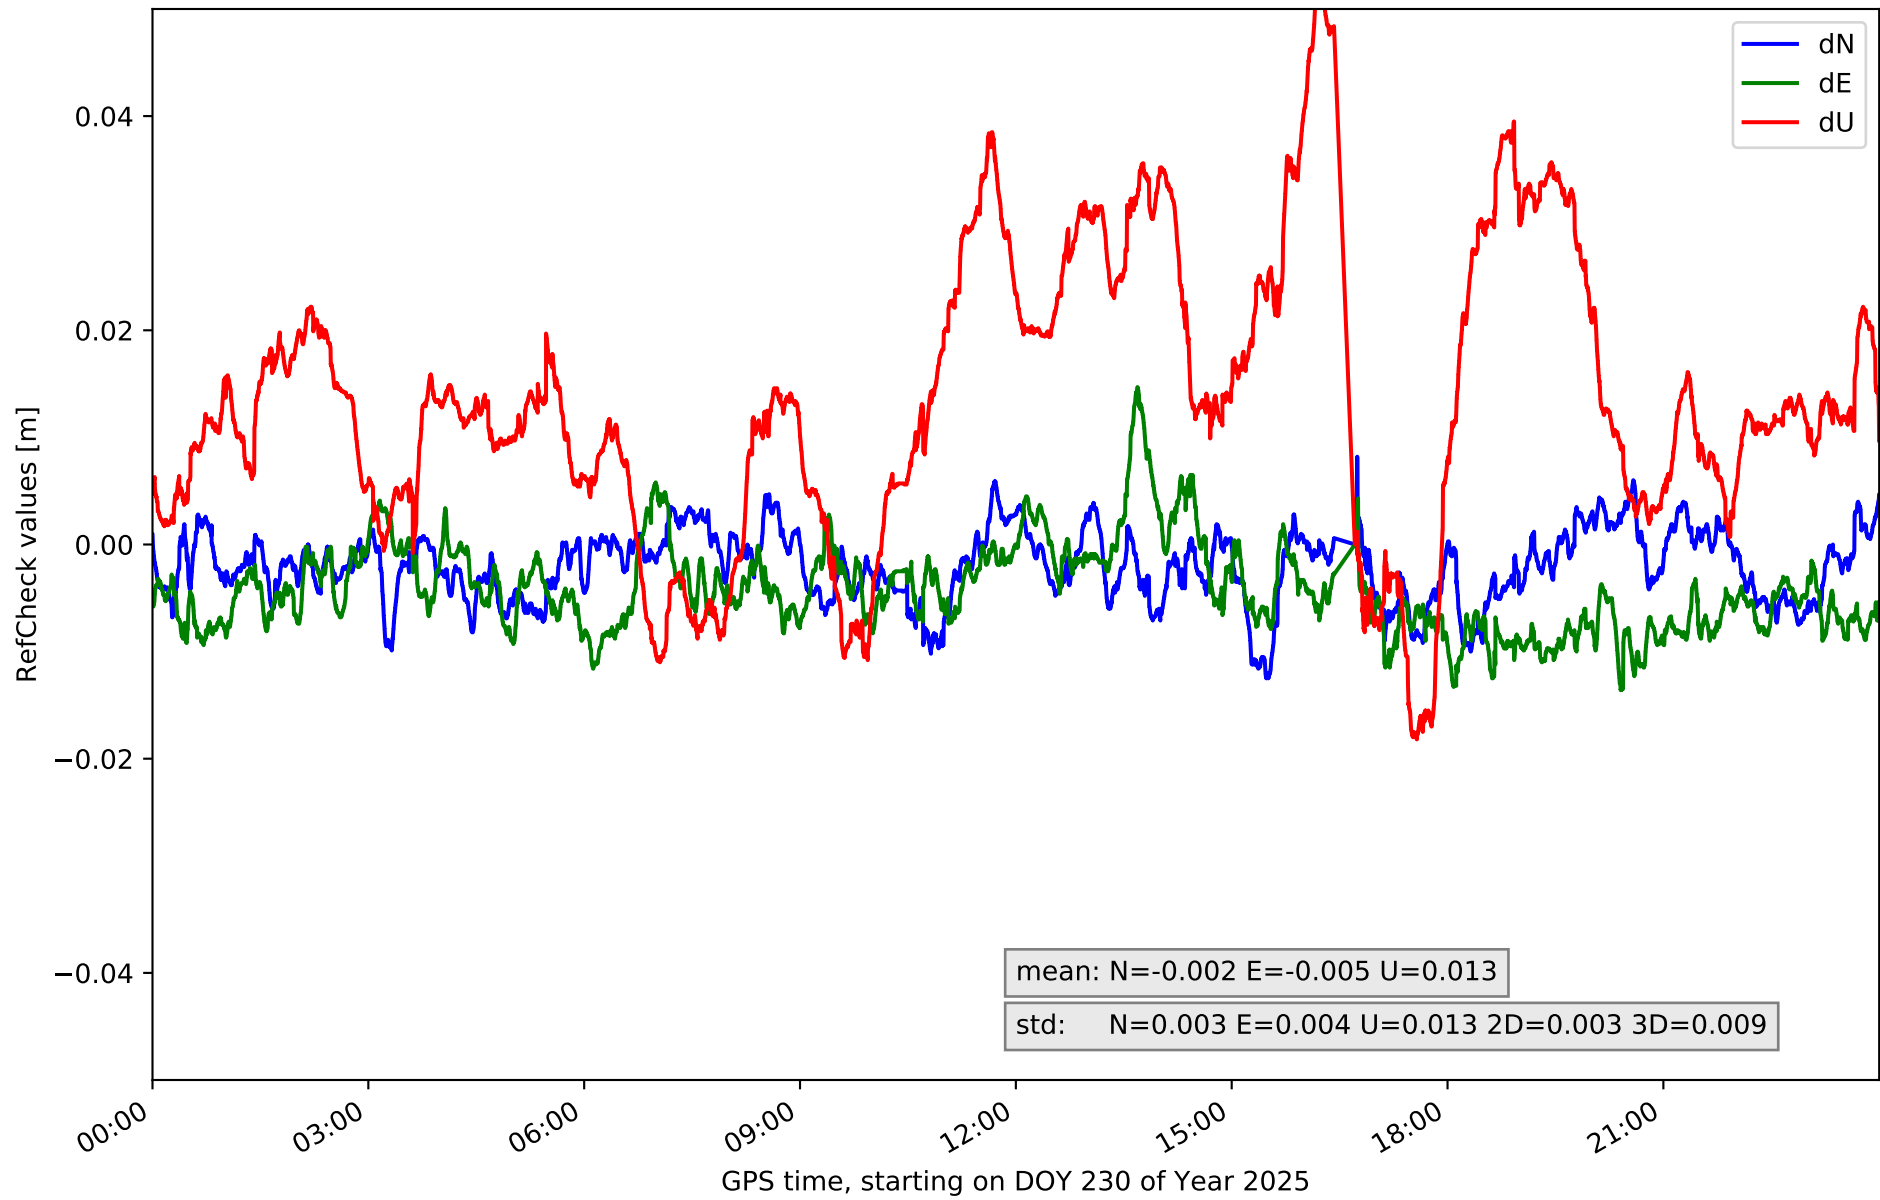


RefCheck for station TN03 in network NT32

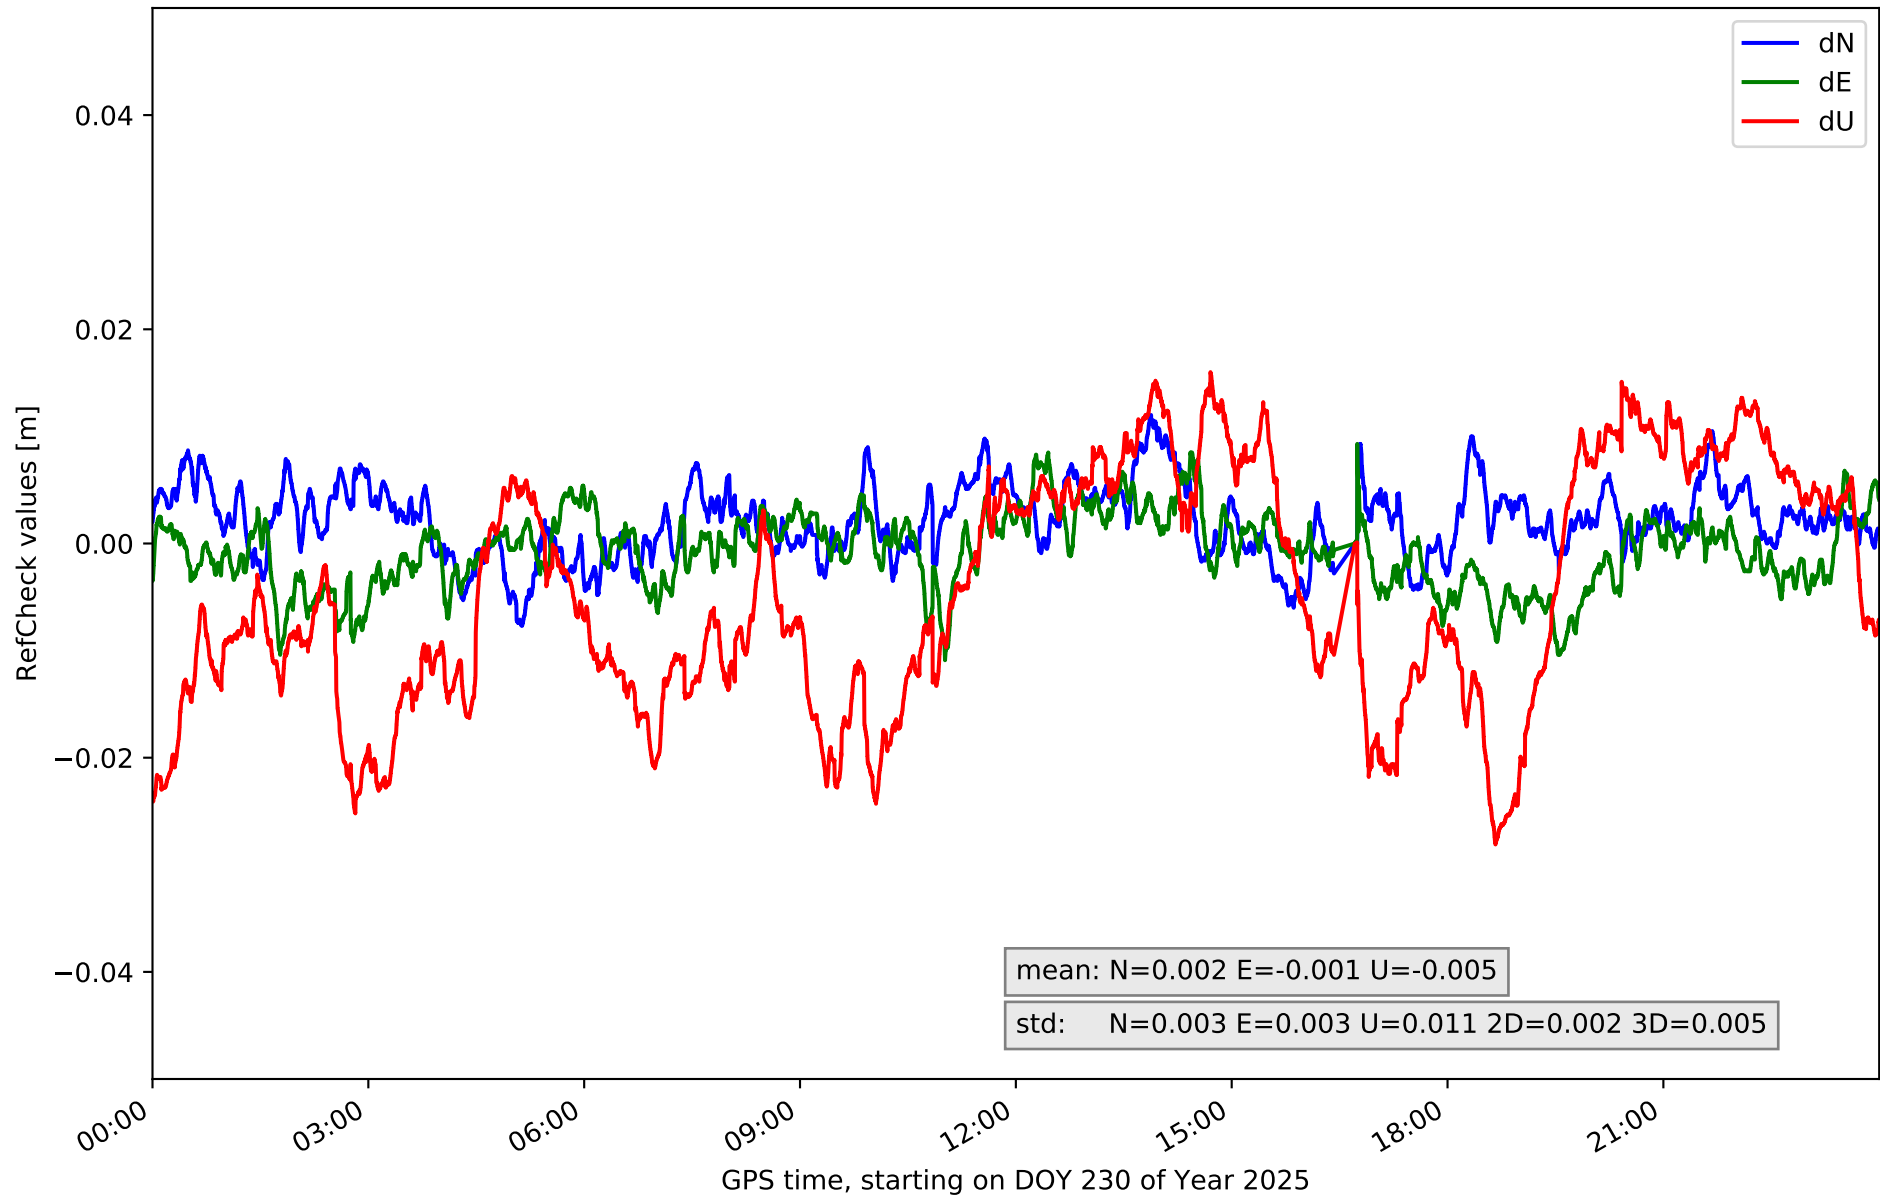


RefCheck for station TN04 in network NT32

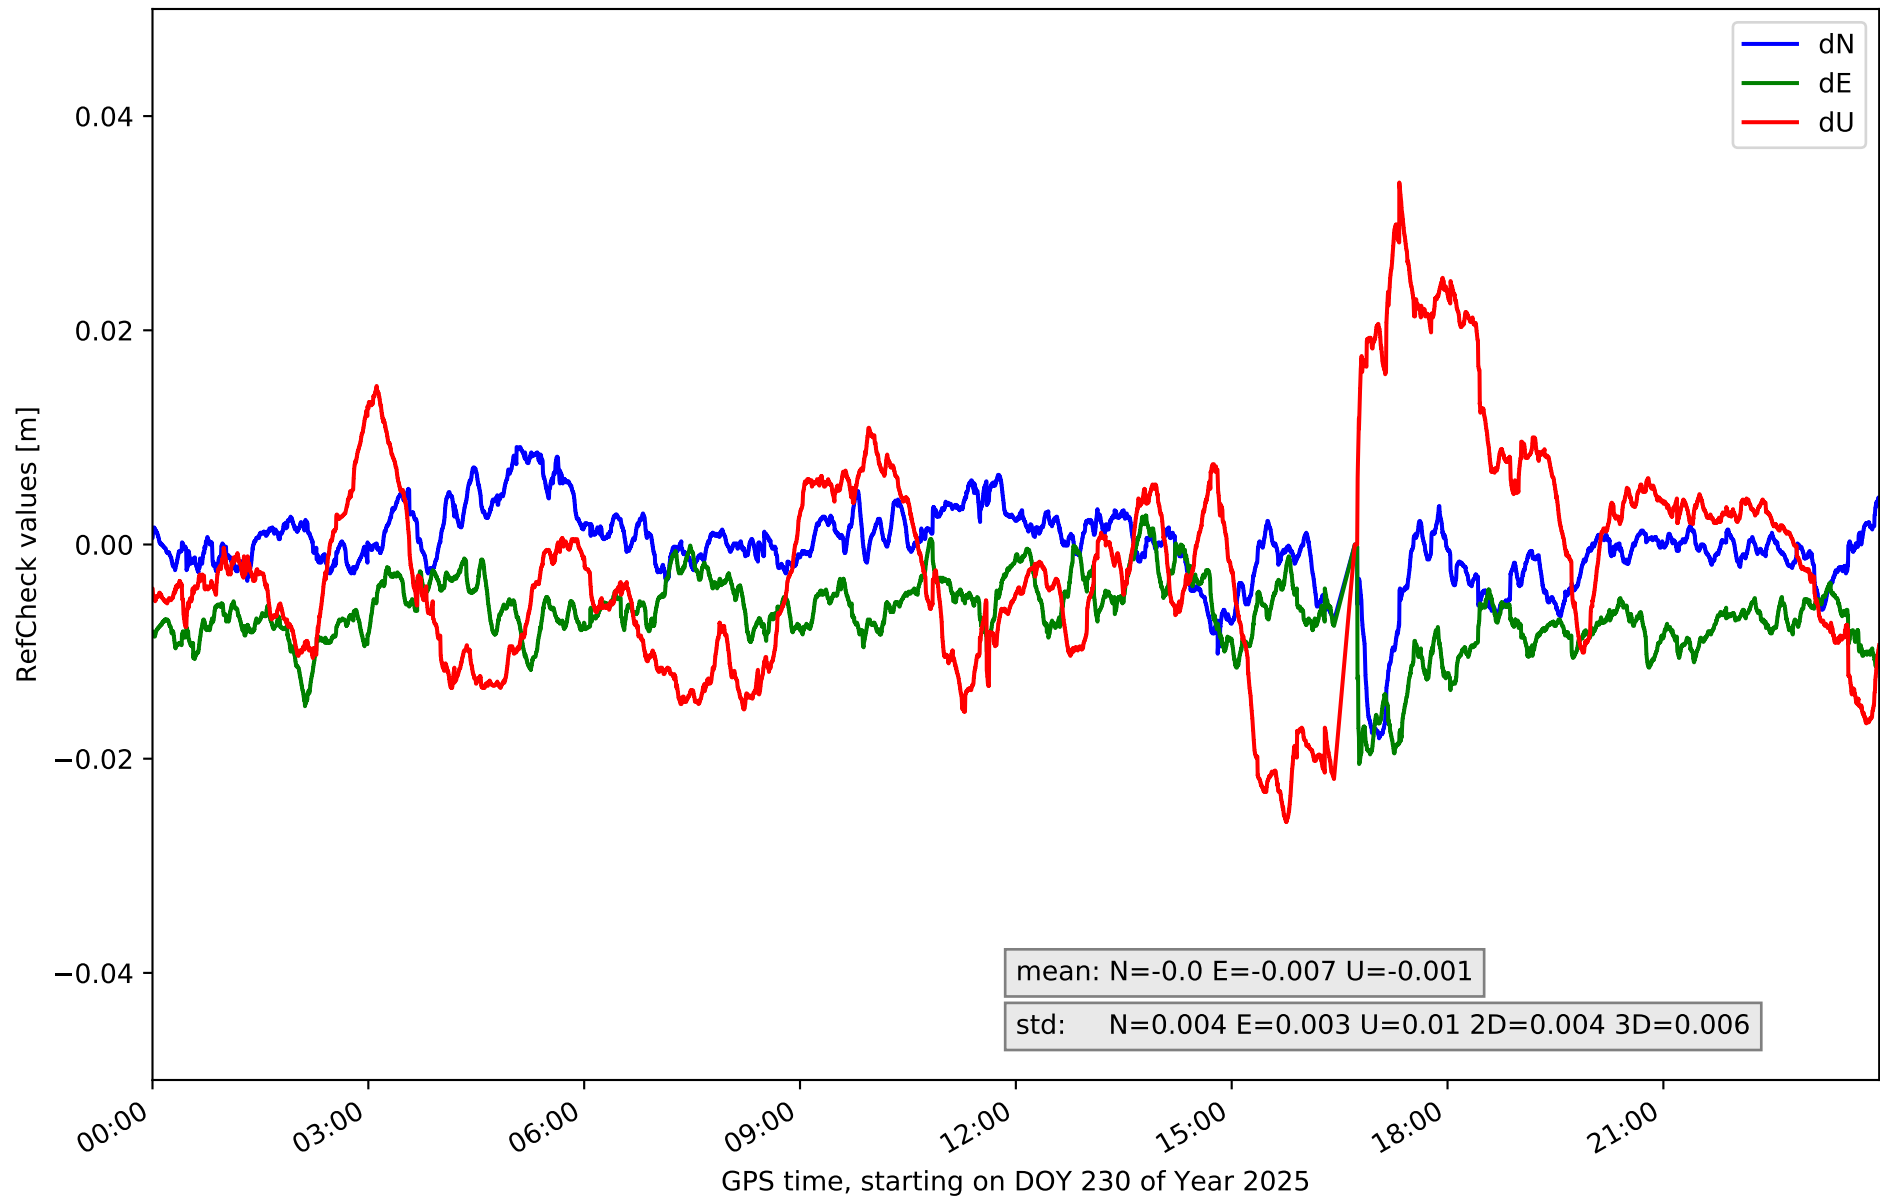


RefCheck for station TN06 in network NT32

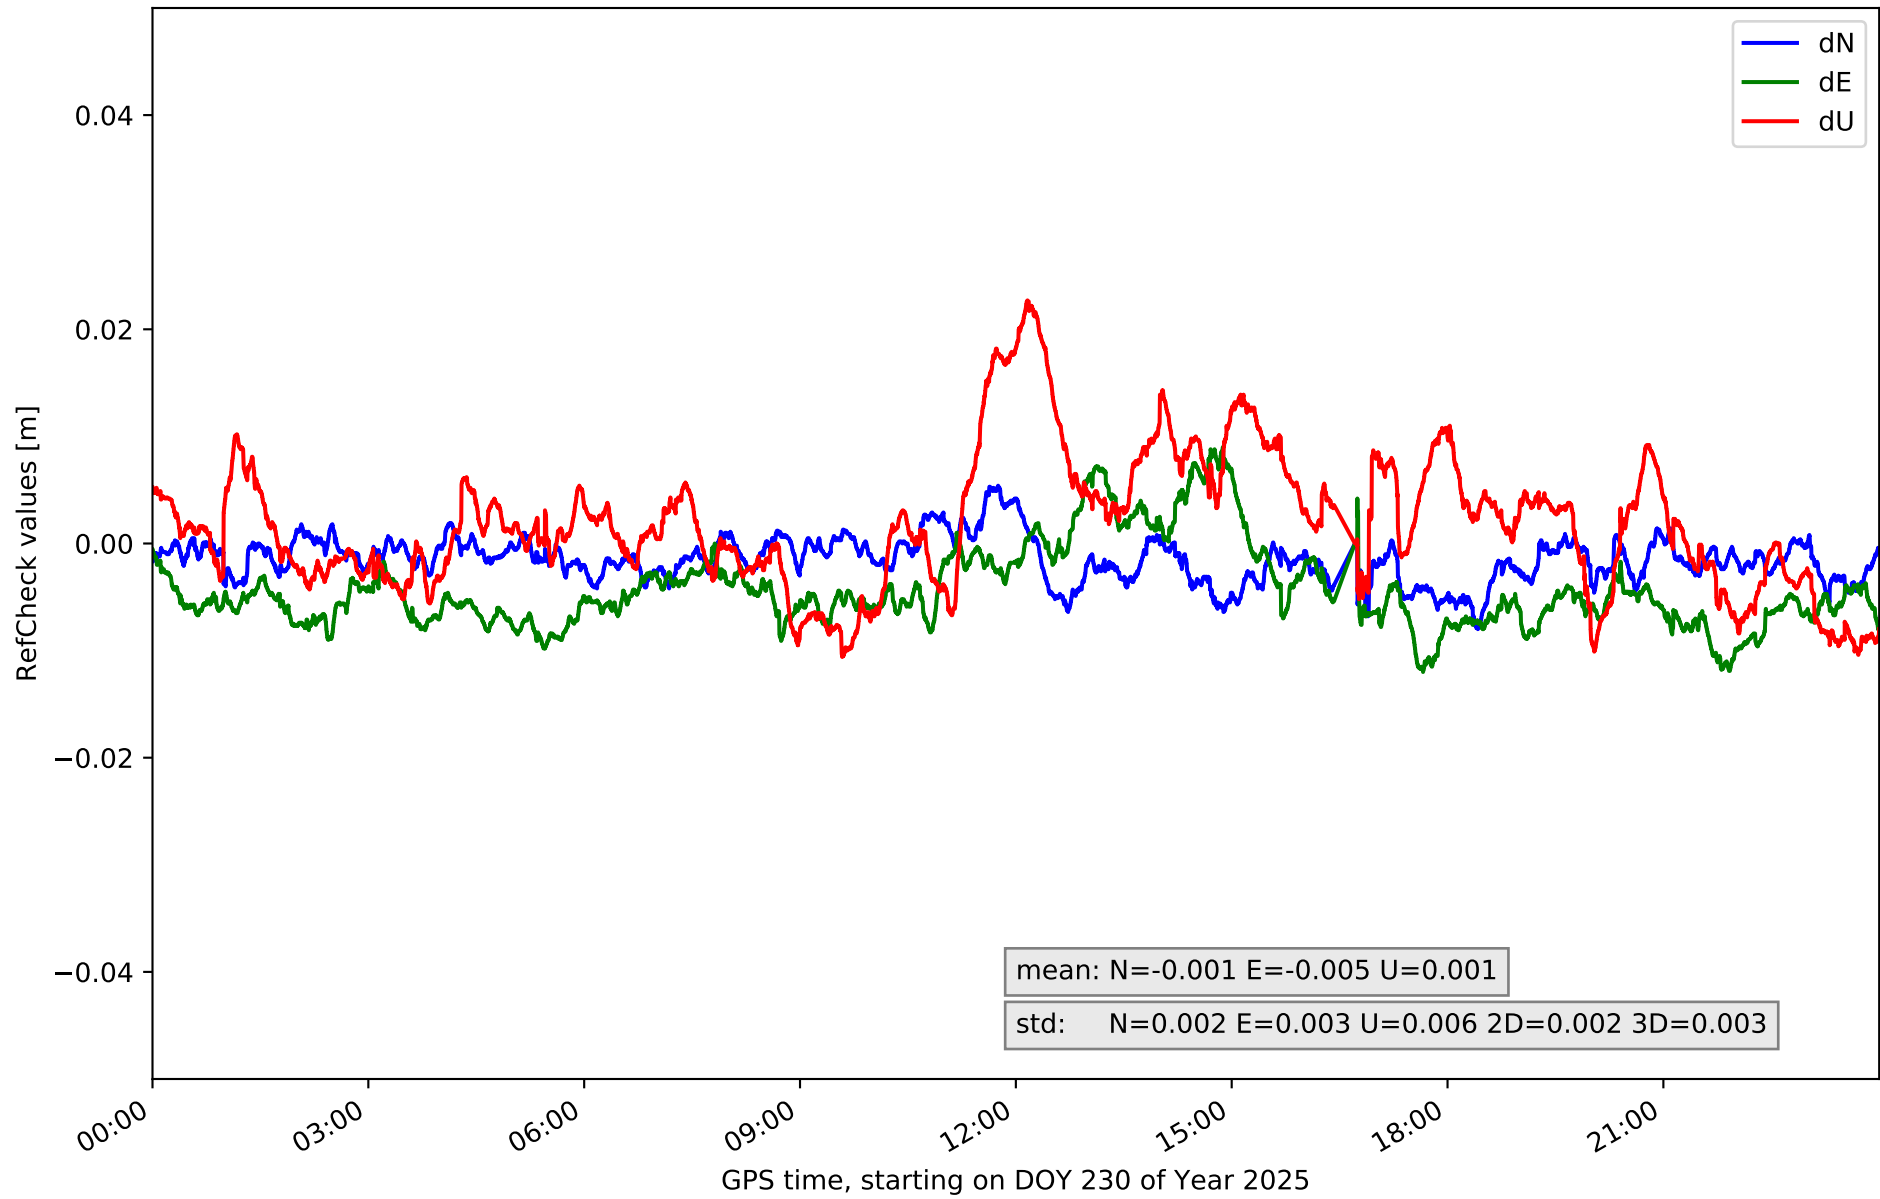

RefCheck for station TN09 in network NT32

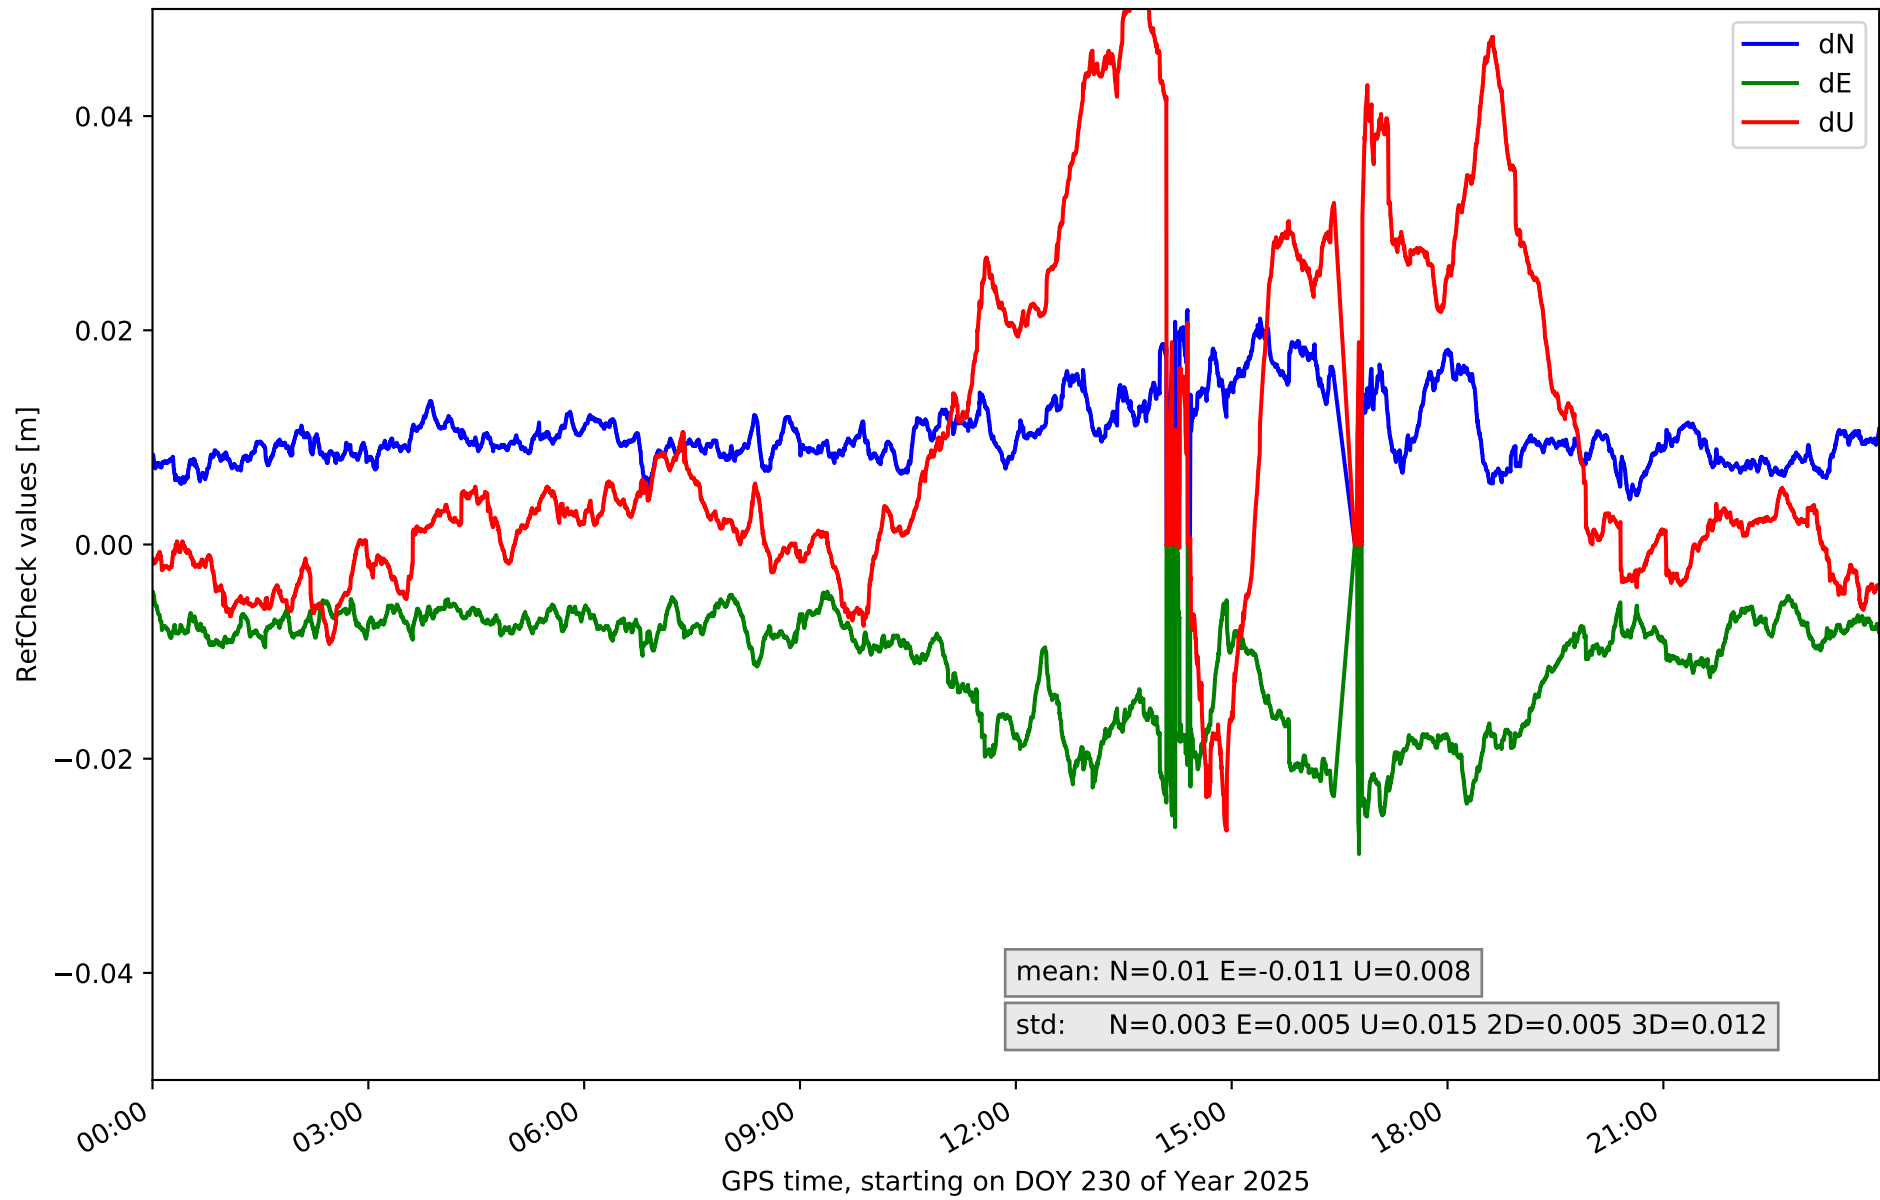

RefCheck for station TE11 in network NT32

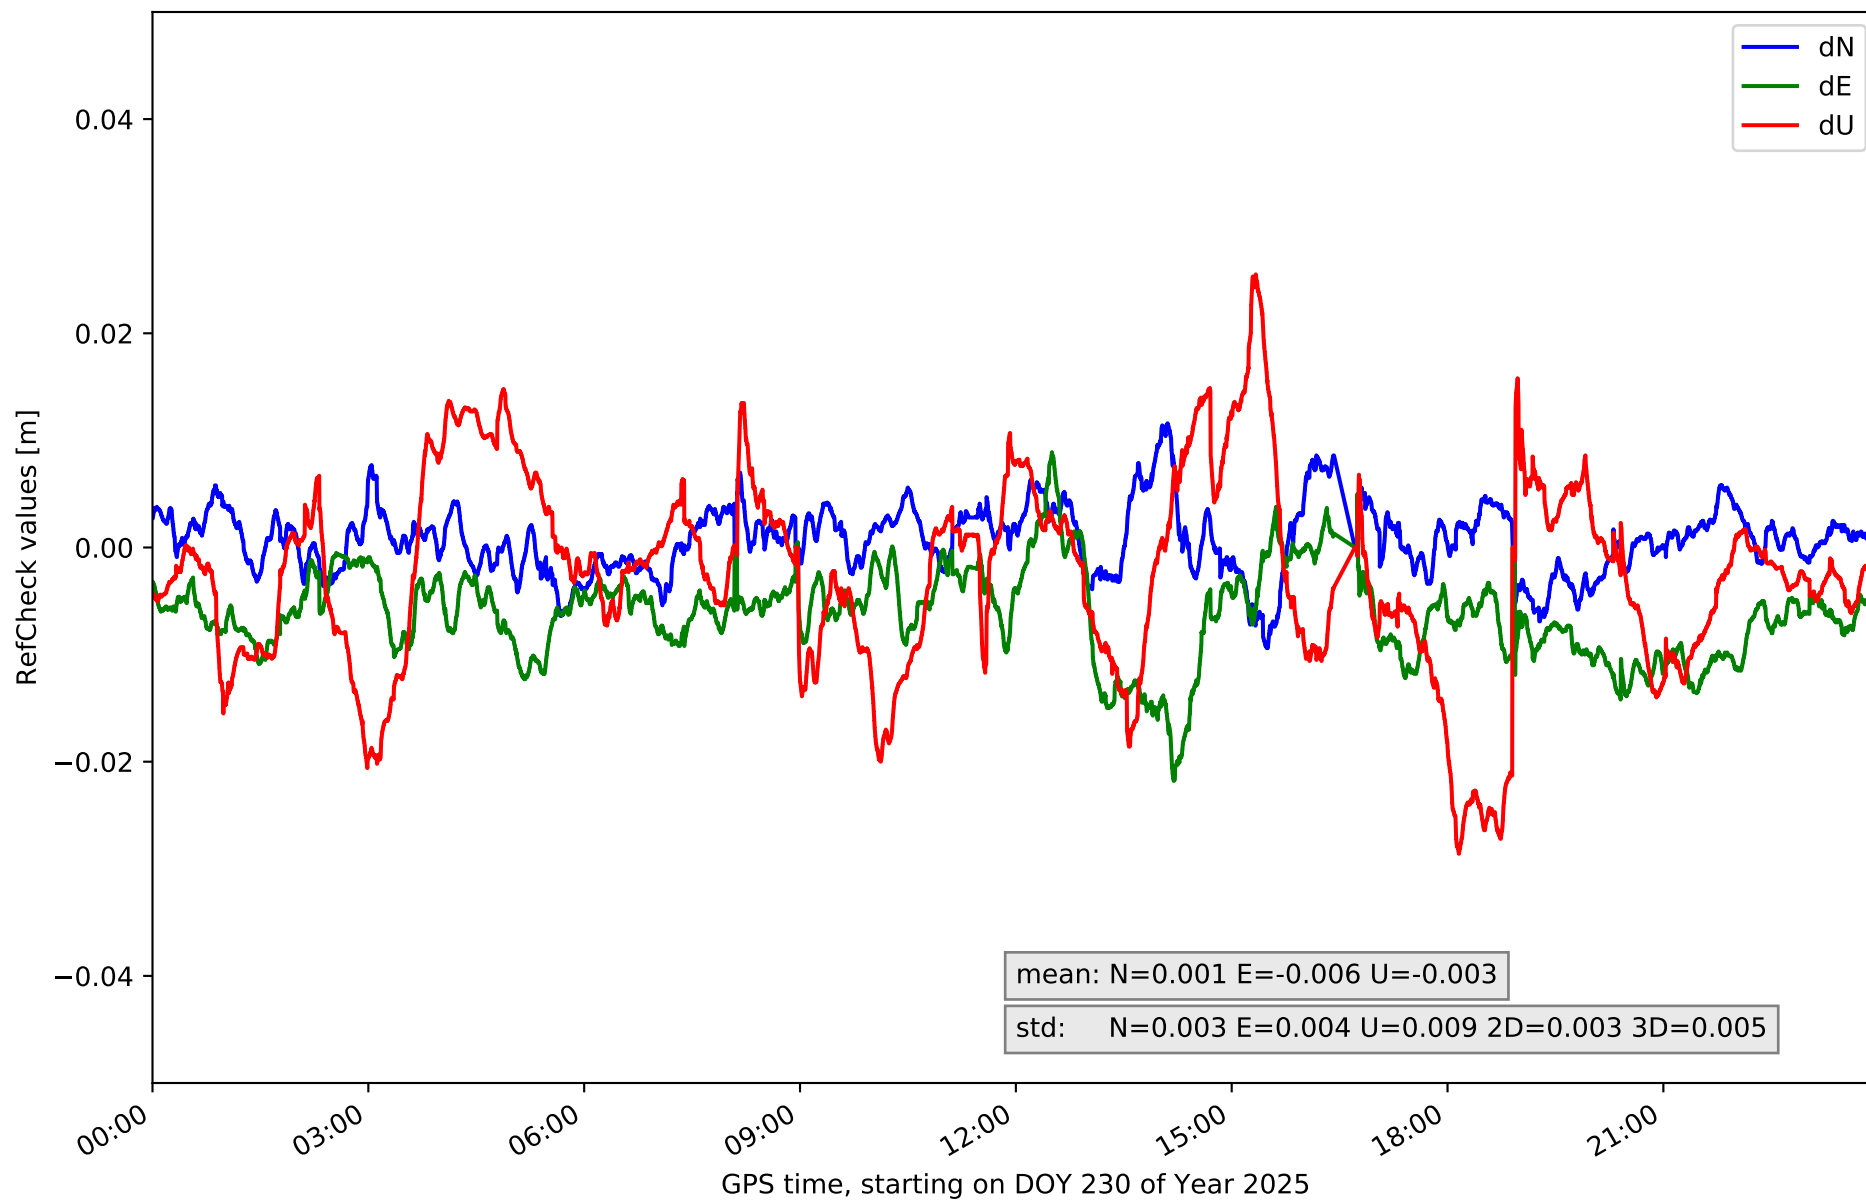

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.007	0.017	0.004	-0.021	0.025	0.007	-0.058	0.03	0.016	0.004	0.008	64389	96.2	37380	55.9
EH02	-0.009	0.025	0.004	-0.029	0.024	0.006	-0.032	0.033	0.016	0.004	0.006	63790	95.3	46414	69.4
GOM1	-0.013	0.011	0.004	-0.03	0.006	0.005	-0.054	0.019	0.014	0.005	0.01	34559	51.6	20426	30.5
IZAN	-0.016	0.011	0.004	-0.013	0.012	0.003	-0.027	0.01	0.007	0.003	0.004	6329	9.5	883	1.3
LP01	-0.022	-0.0	0.003	-0.0	0.018	0.003	-0.02	0.032	0.01	0.003	0.006	63017	94.2	33989	50.8
LP03	-0.009	0.004	0.002	-0.004	0.016	0.004	-0.007	0.019	0.005	0.004	0.004	13983	22.9	17	0.0
LPAL	-0.021	0.0	0.003	-0.0	0.023	0.003	-0.02	0.017	0.006	0.004	0.005	65961	98.6	14459	21.6
LRES	-0.009	0.016	0.004	-0.003	0.03	0.005	-0.014	0.028	0.009	0.004	0.005	64617	96.6	27884	41.7
TN01	-0.019	0.003	0.004	-0.019	0.007	0.004	-0.03	0.009	0.007	0.004	0.006	25245	37.7	14428	21.6
TN02	-0.013	0.008	0.003	-0.014	0.015	0.004	-0.018	0.053	0.013	0.003	0.009	8023	12.0	18225	27.2
TN03	-0.008	0.012	0.003	-0.011	0.009	0.003	-0.028	0.016	0.011	0.002	0.005	1689	2.5	7402	11.1
TN04	-0.018	0.009	0.004	-0.021	0.003	0.003	-0.026	0.034	0.01	0.004	0.006	10553	15.8	7107	10.6
TN06	-0.008	0.005	0.002	-0.012	0.009	0.003	-0.011	0.023	0.006	0.002	0.003	3249	4.9	518	0.8
TN09	-0.0	0.022	0.003	-0.029	-0.0	0.005	-0.027	0.053	0.015	0.005	0.012	61939	92.6	19274	28.8
TE11	-0.009	0.012	0.003	-0.022	0.009	0.004	-0.029	0.025	0.009	0.003	0.005	14083	21.0	4891	7.3
Mean	-0.012	0.01	0.003	-0.015	0.014	0.004	-0.027	0.027	0.01	0.004	0.006	33428.4	50.1	16886.5	25.2
Min/Max	-0.022	0.025	0.004	-0.03	0.03	0.007	-0.058	0.053	0.016	0.005	0.012	65961	98.6	46414	69.4

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	92.7	94.2	92.4	93.8	90.2
considering satellites with dual-frequency fixed	88.2	89.5	87.6	91.0	82.9
considering all signals separately	88.3	89.5	87.6	91.2	81.1