

summary for network N32T

timeperiod chosen: from 2025-08-26-00:00:00 until 2025-08-26-23:59:58

average update rate (durations larger than 15 seconds considered as observation gap): 1.7 seconds


average fixing percentage with threshold set to 0.3: 91.9 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

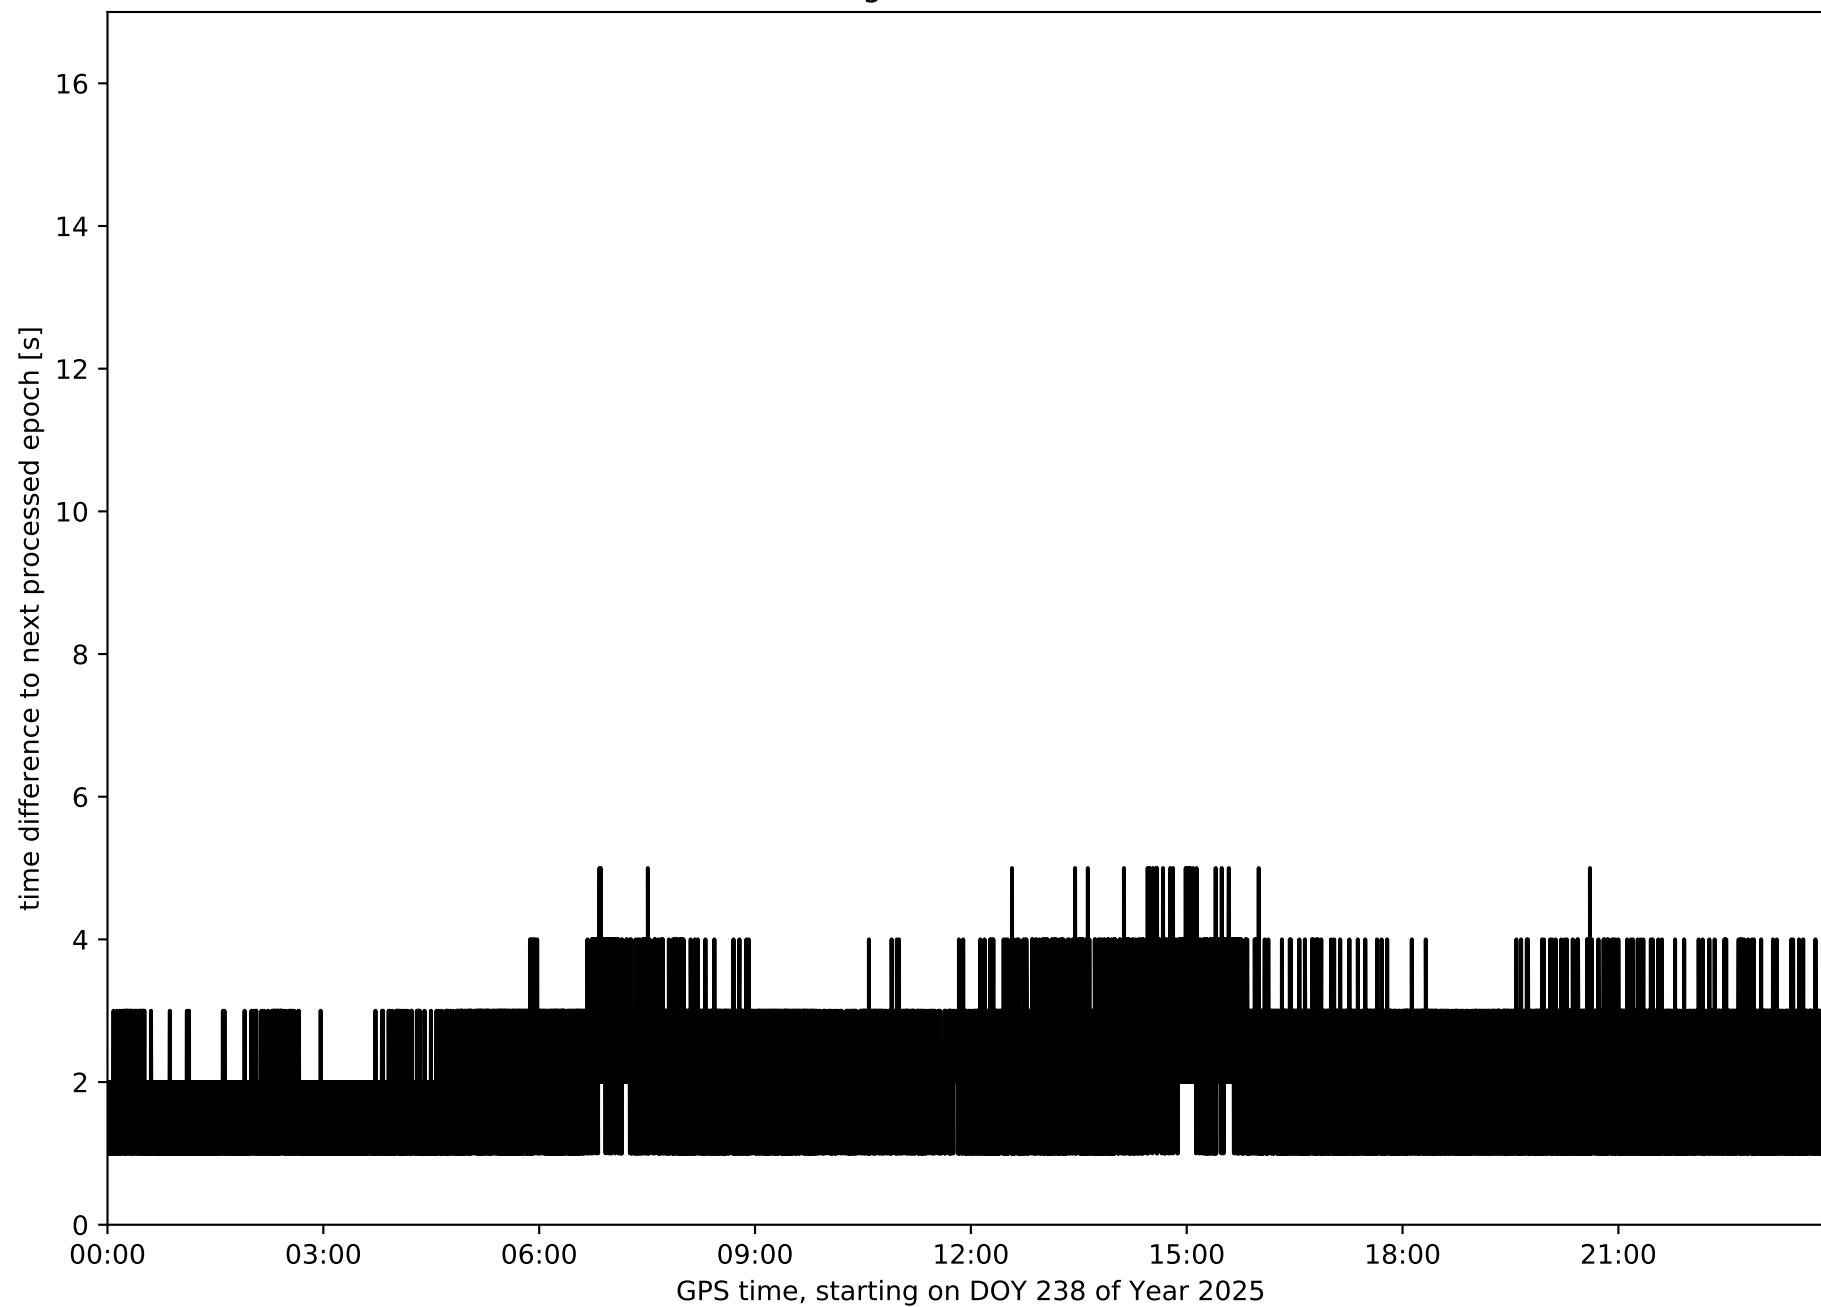


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

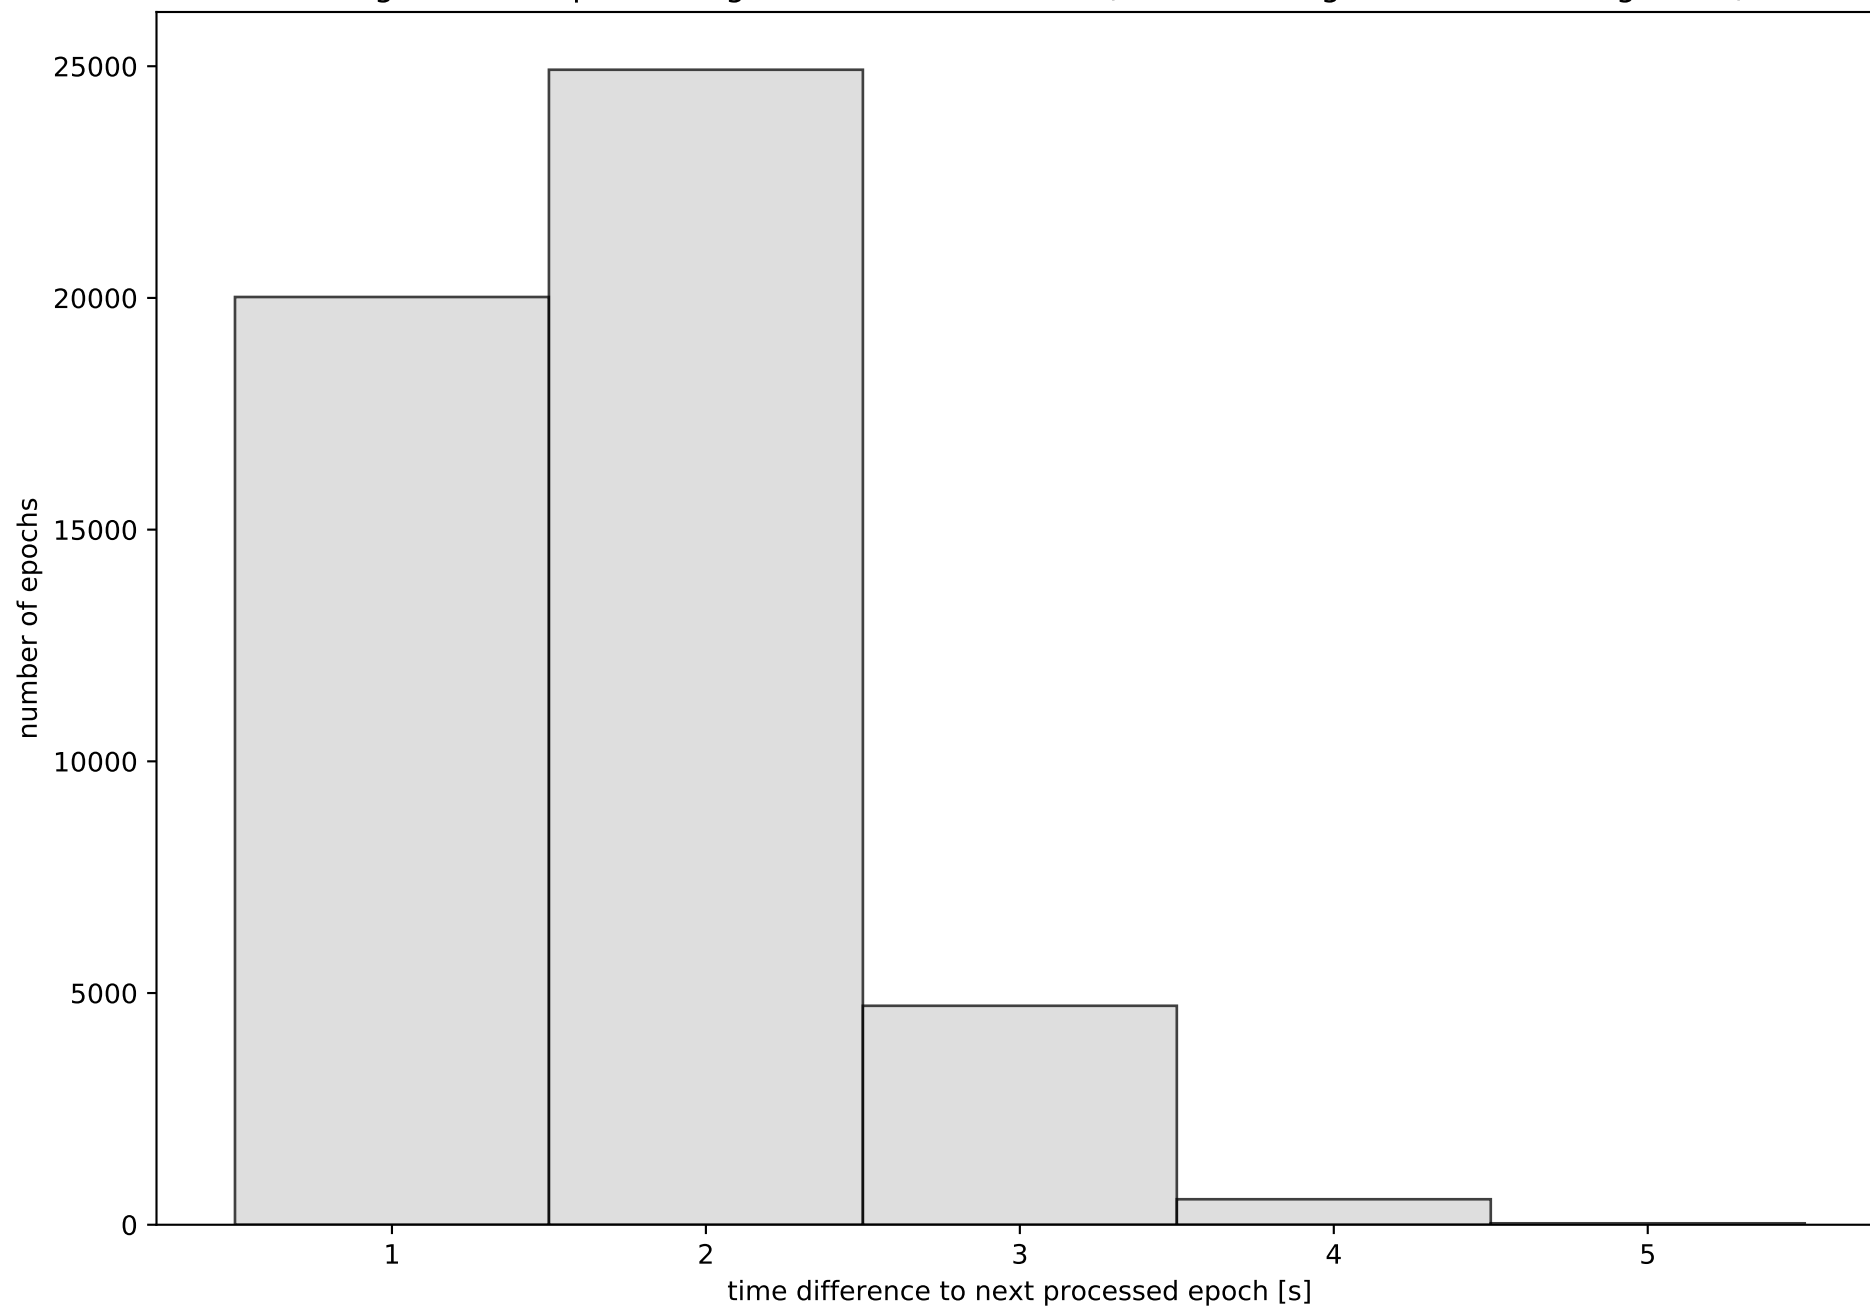


Network N32T with threshold set to 0.3

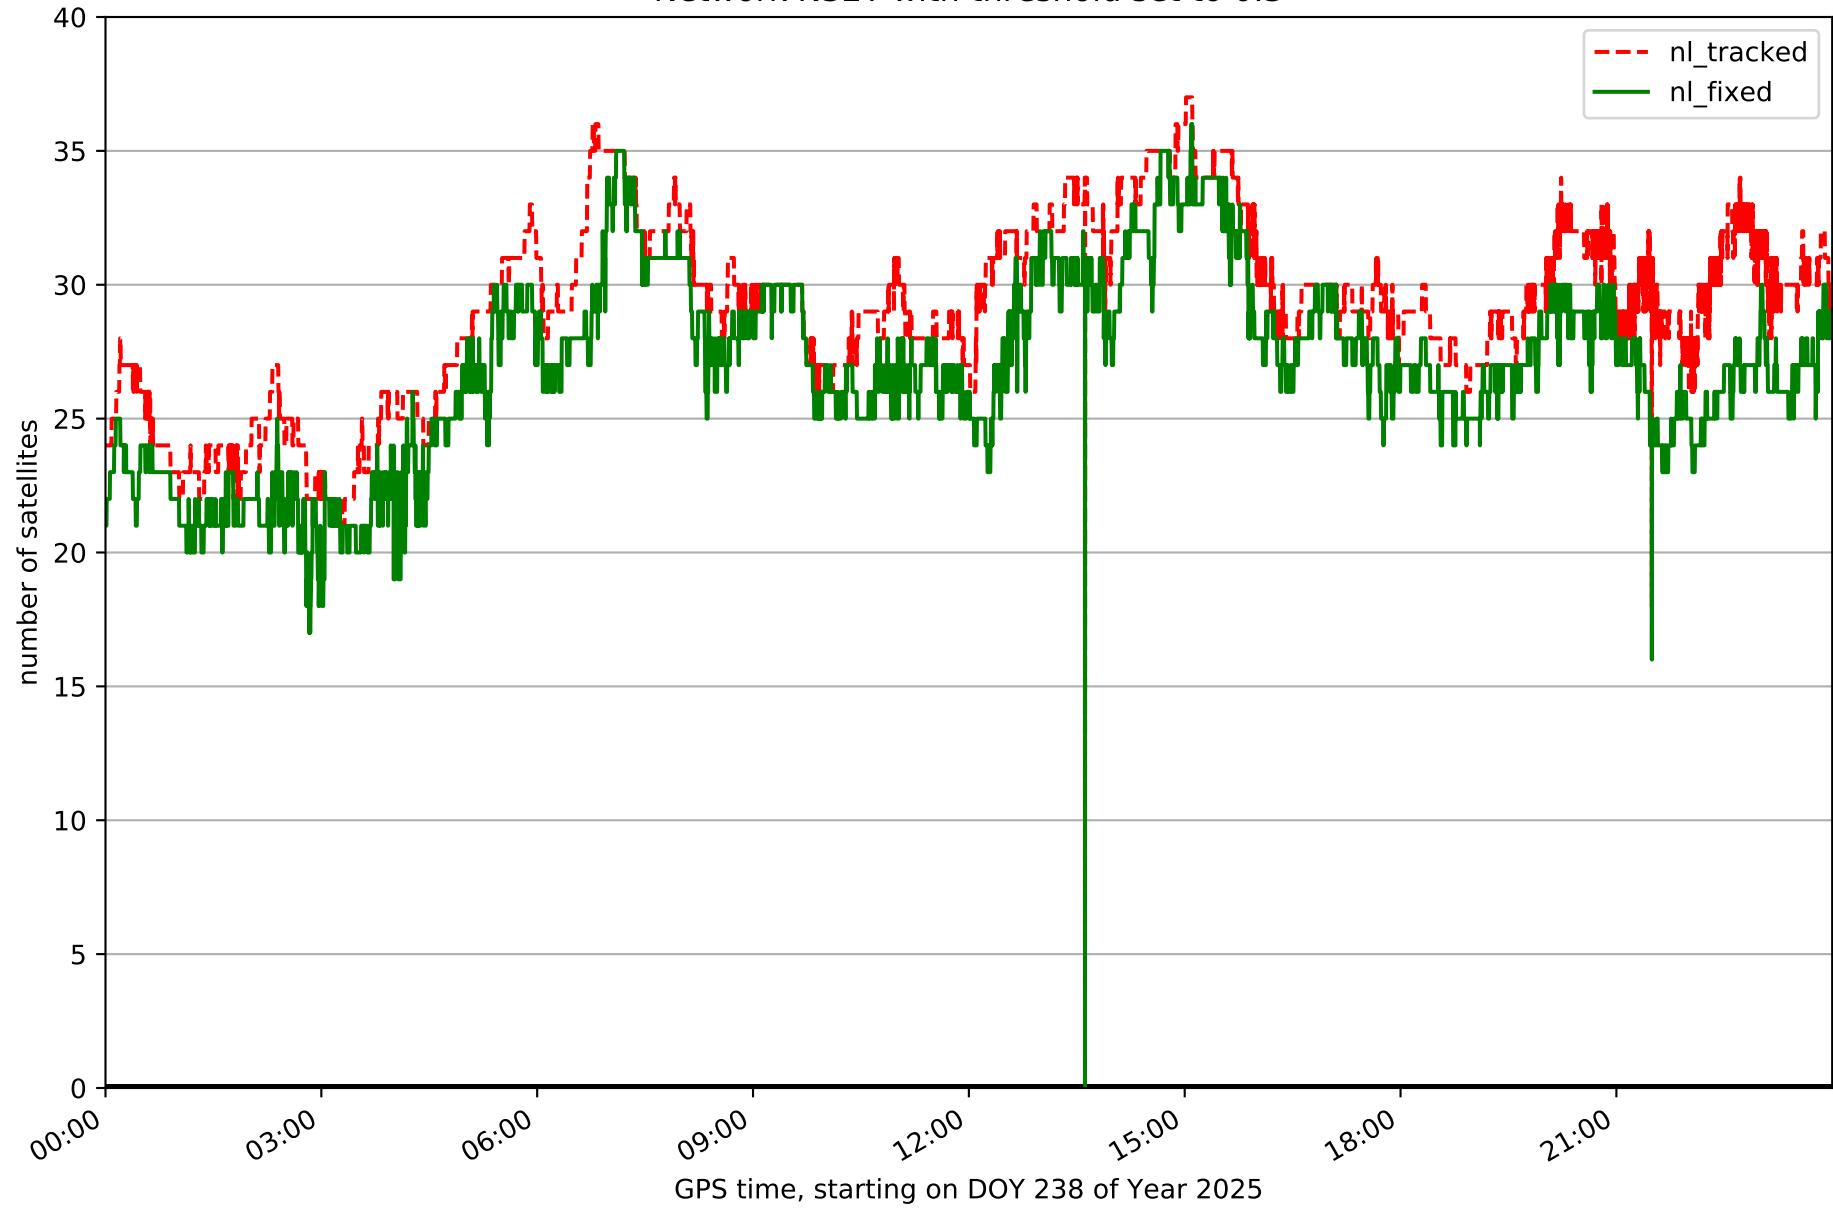


Fixing percentage of satellites in network N32T with threshold set to 0.3

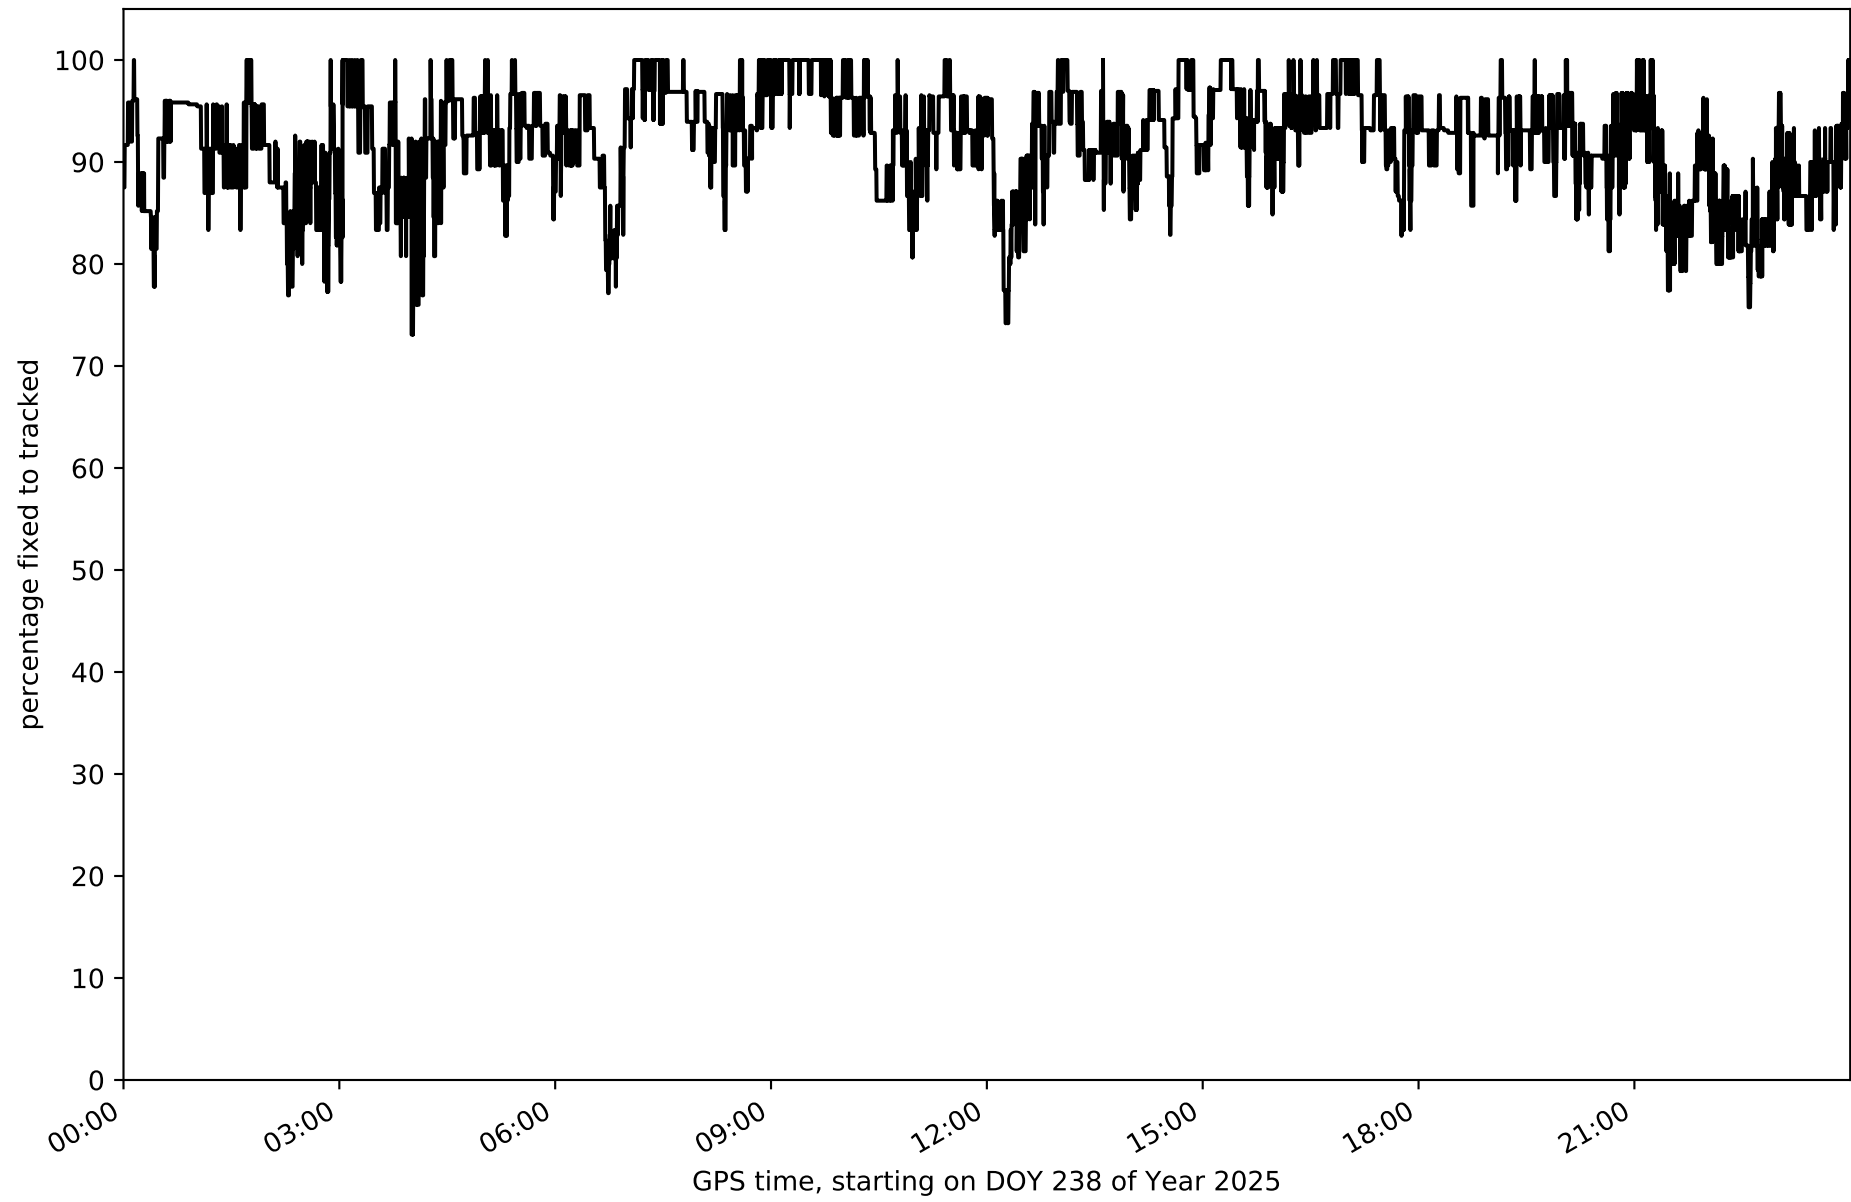


Network N32T - only GPS with threshold set to 0.3

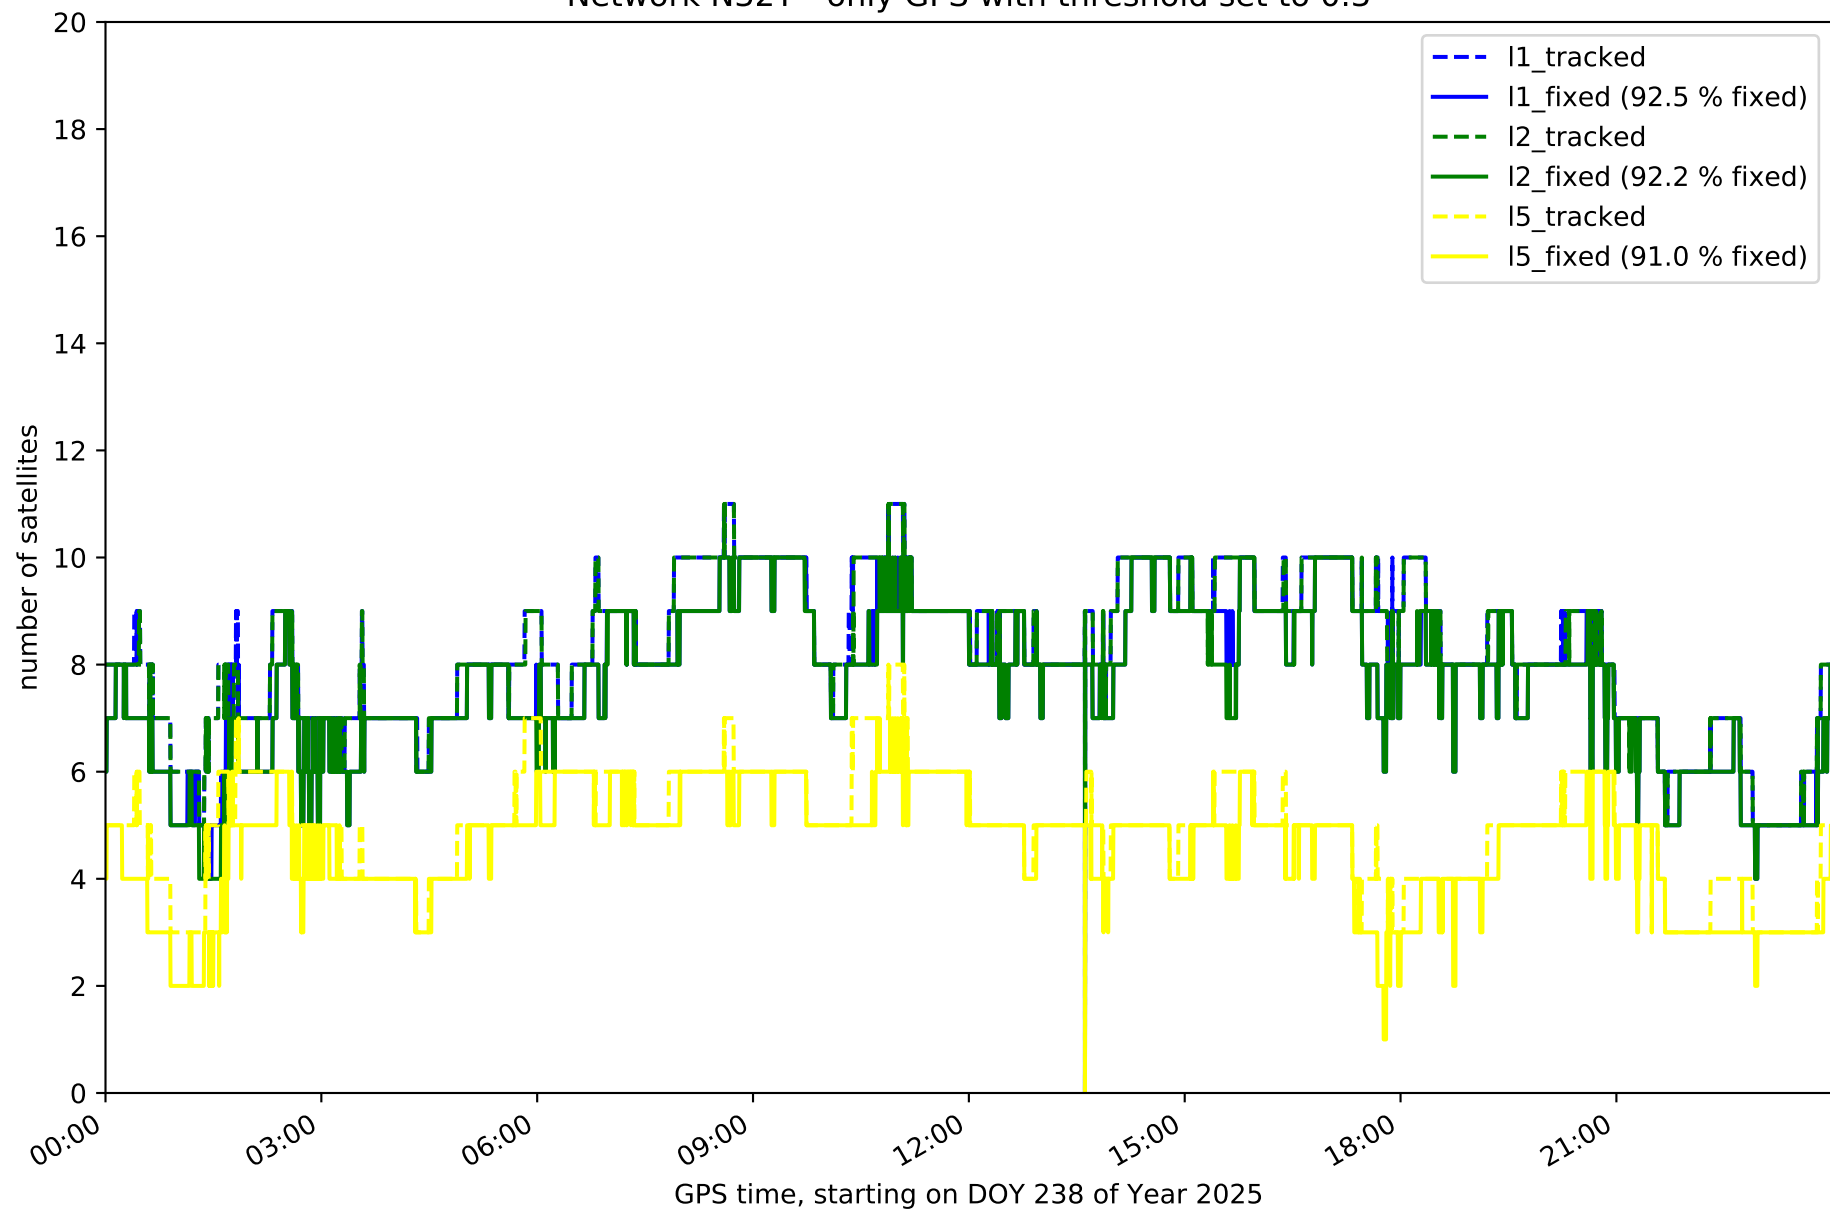


Network N32T - only GLONASS with threshold set to 0.3

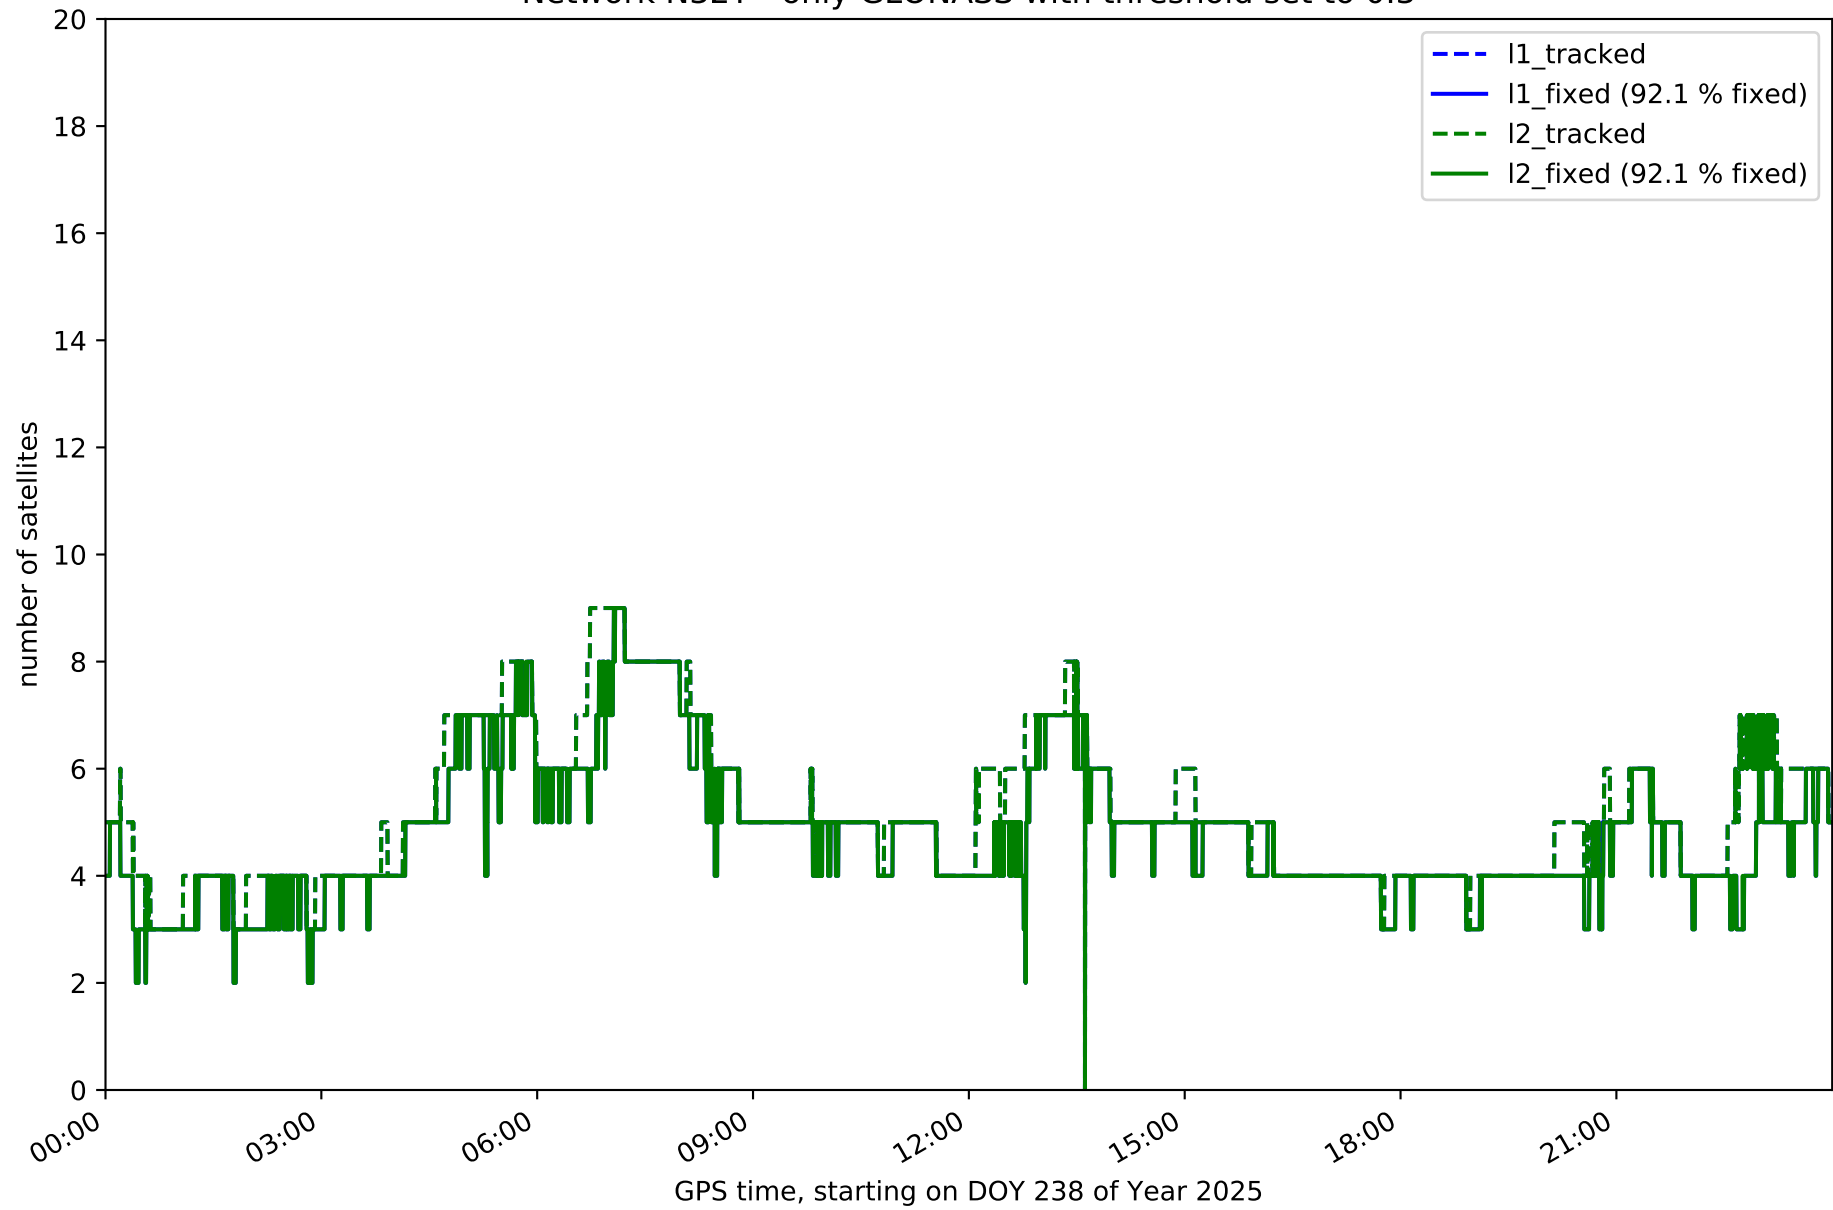


Network N32T - only BDS with threshold set to 0.3

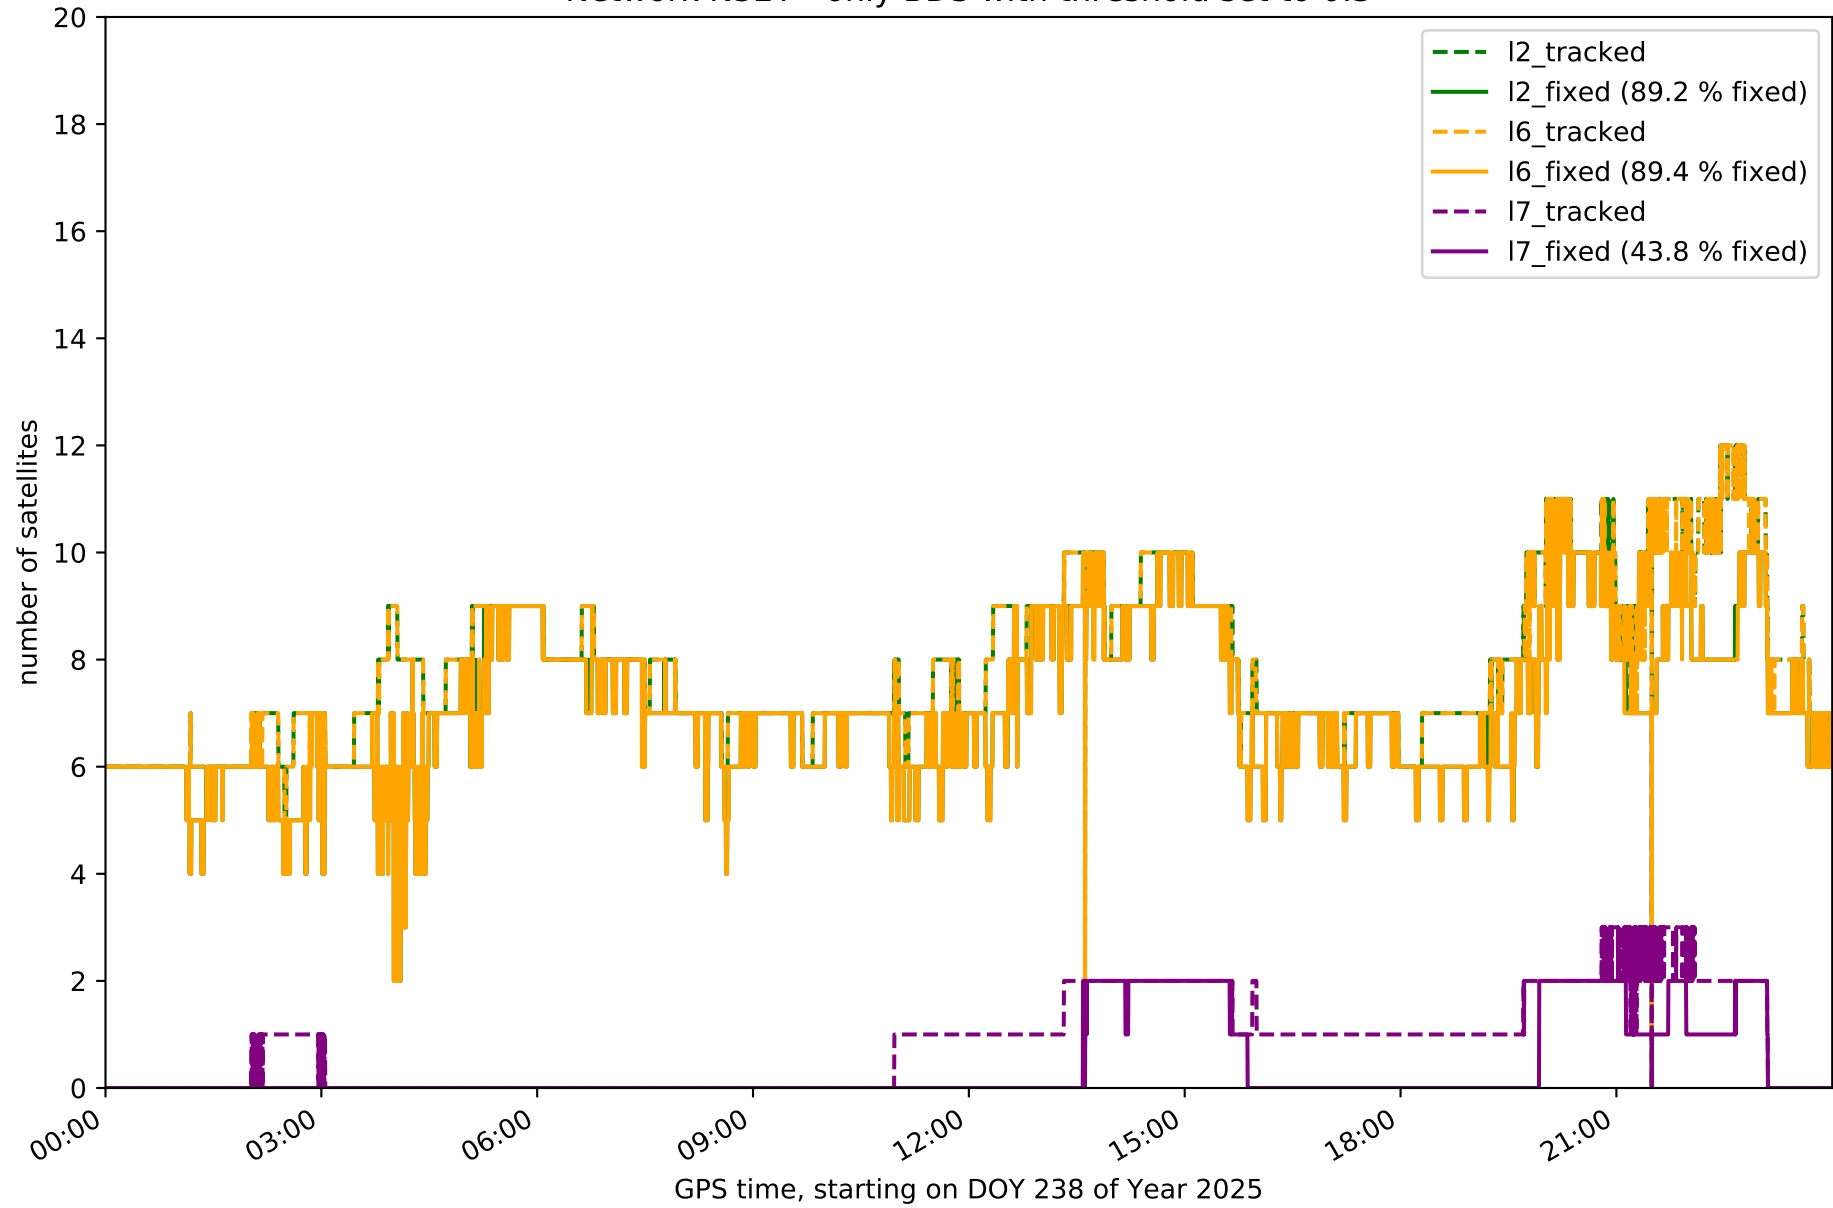


Network N32T - only Galileo with threshold set to 0.3

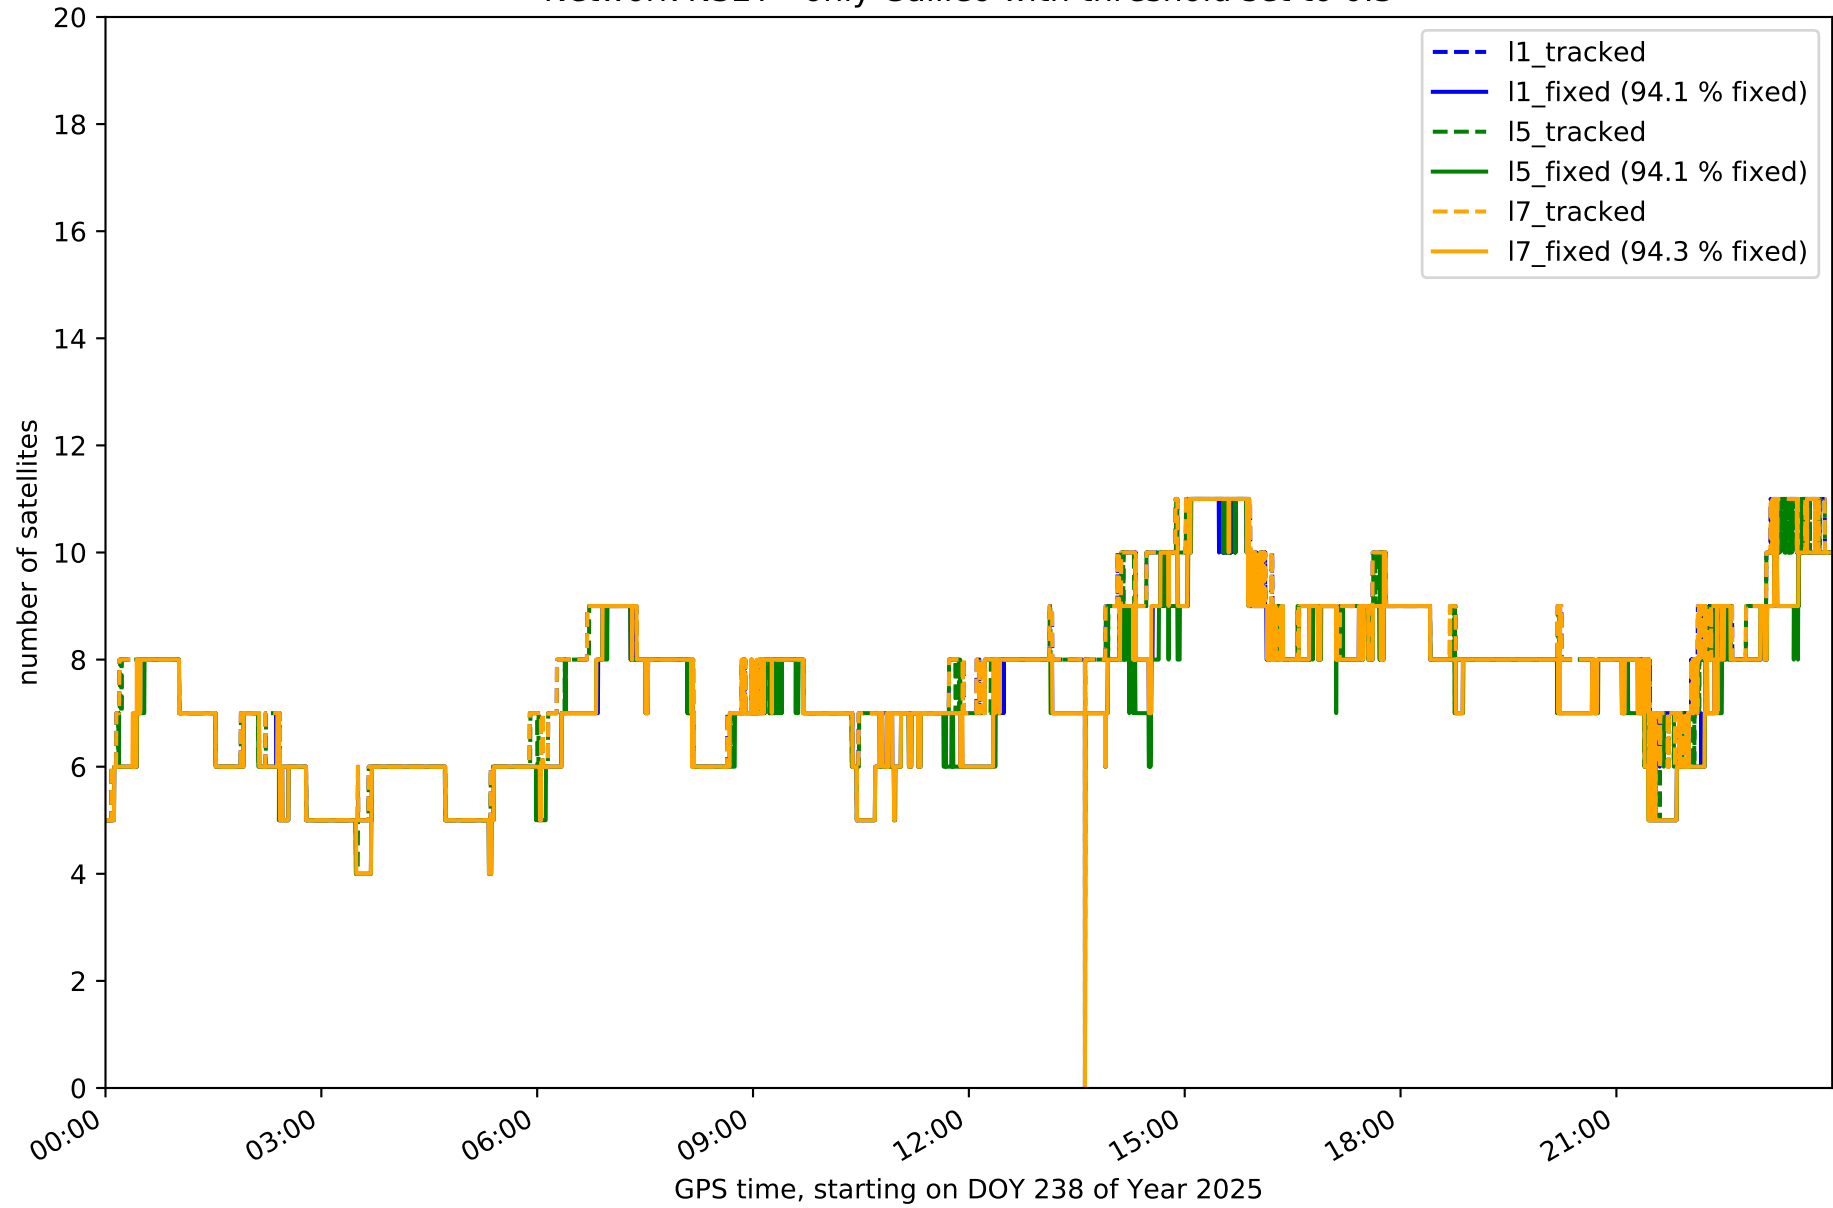


Station EH01 in network N32T

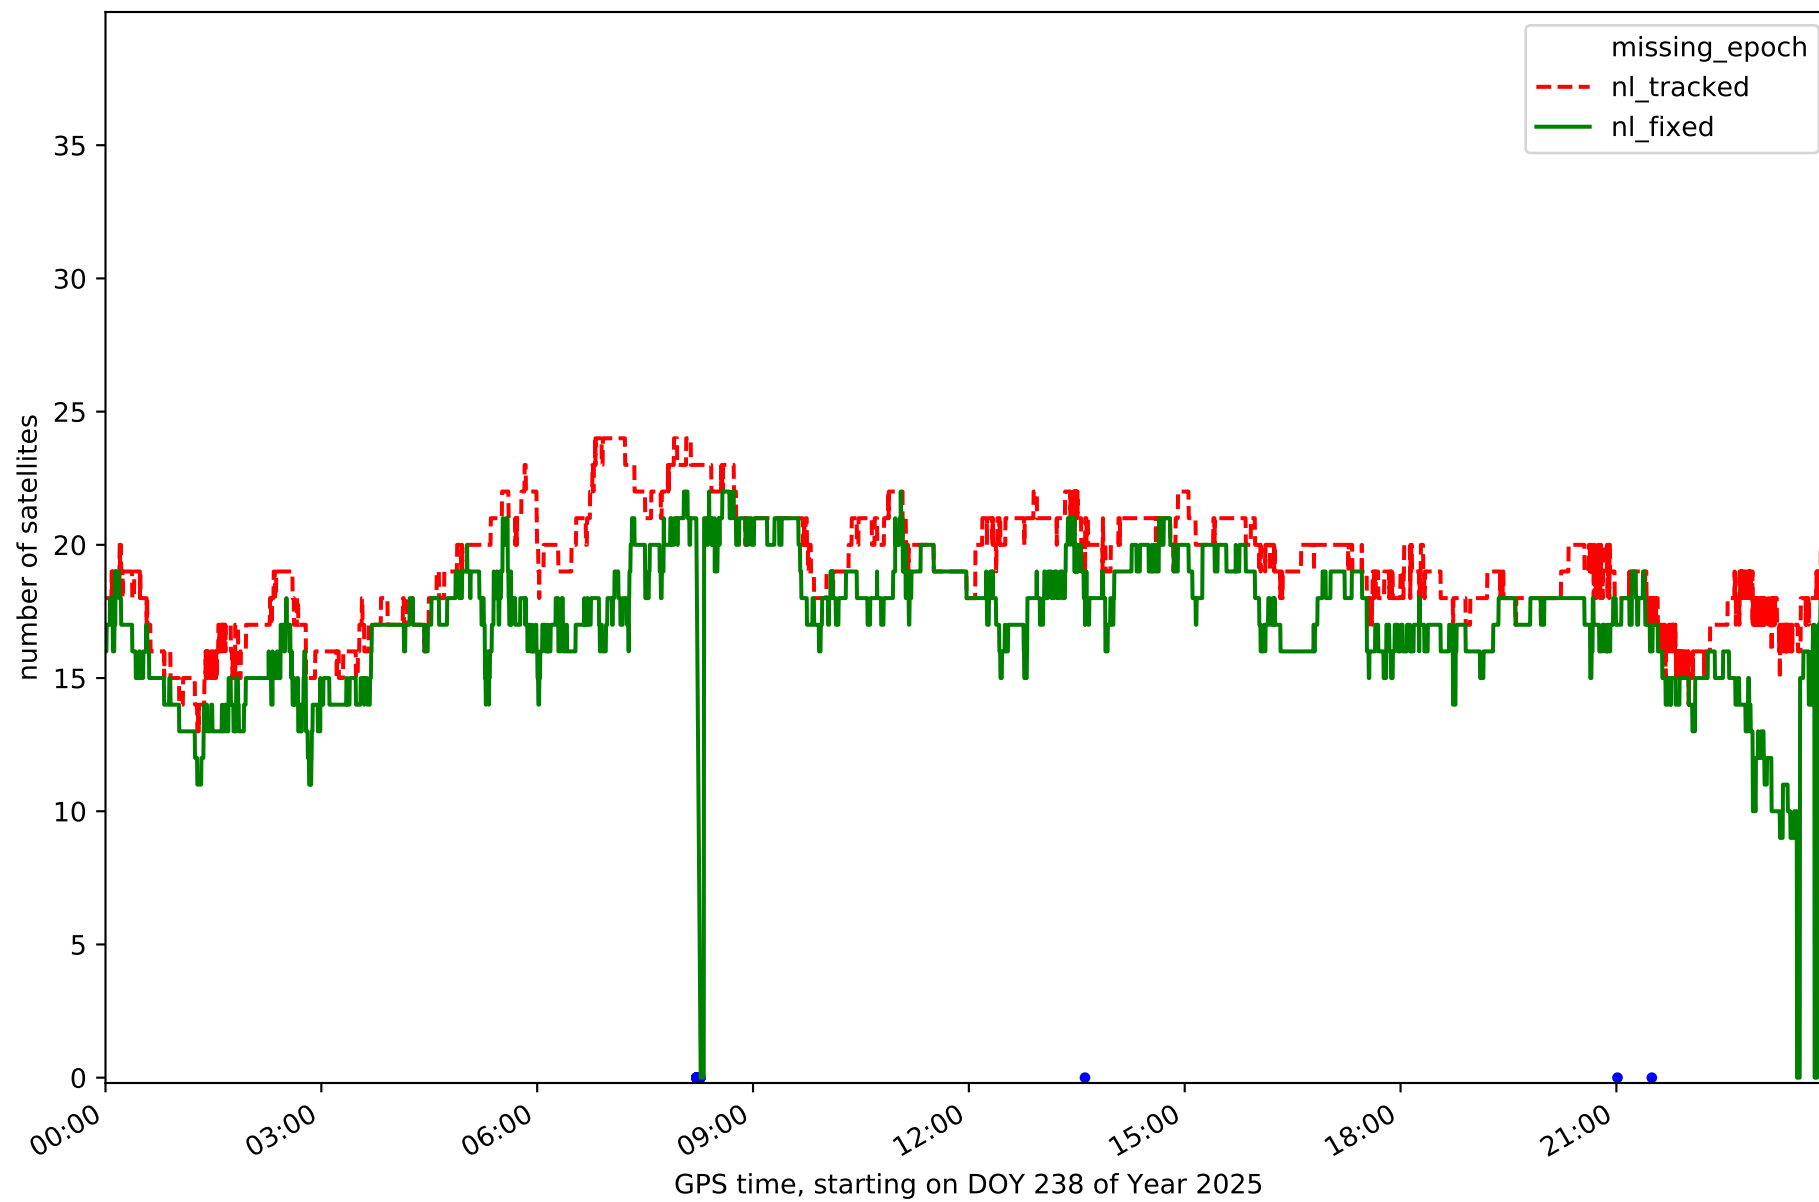


Station EH02 in network N32T

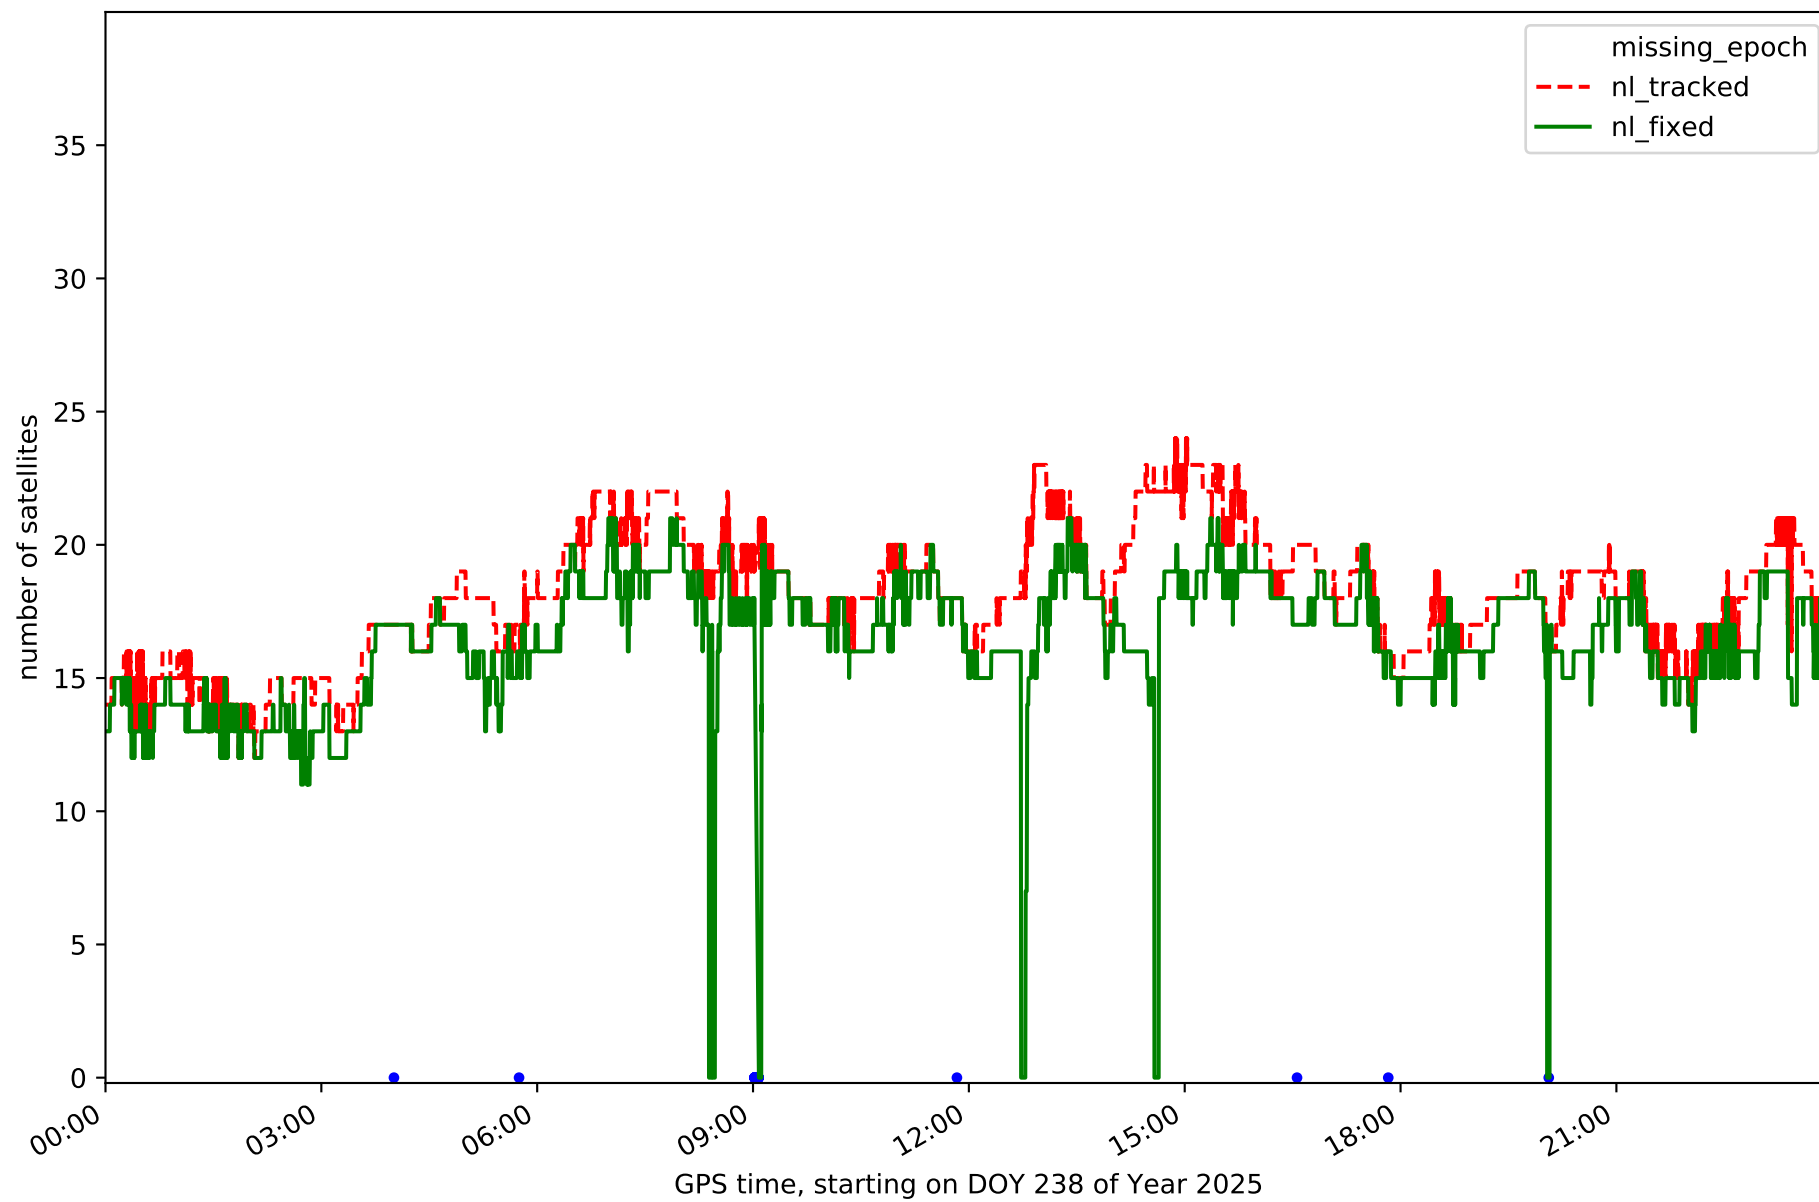


Station GOM1 in network N32T

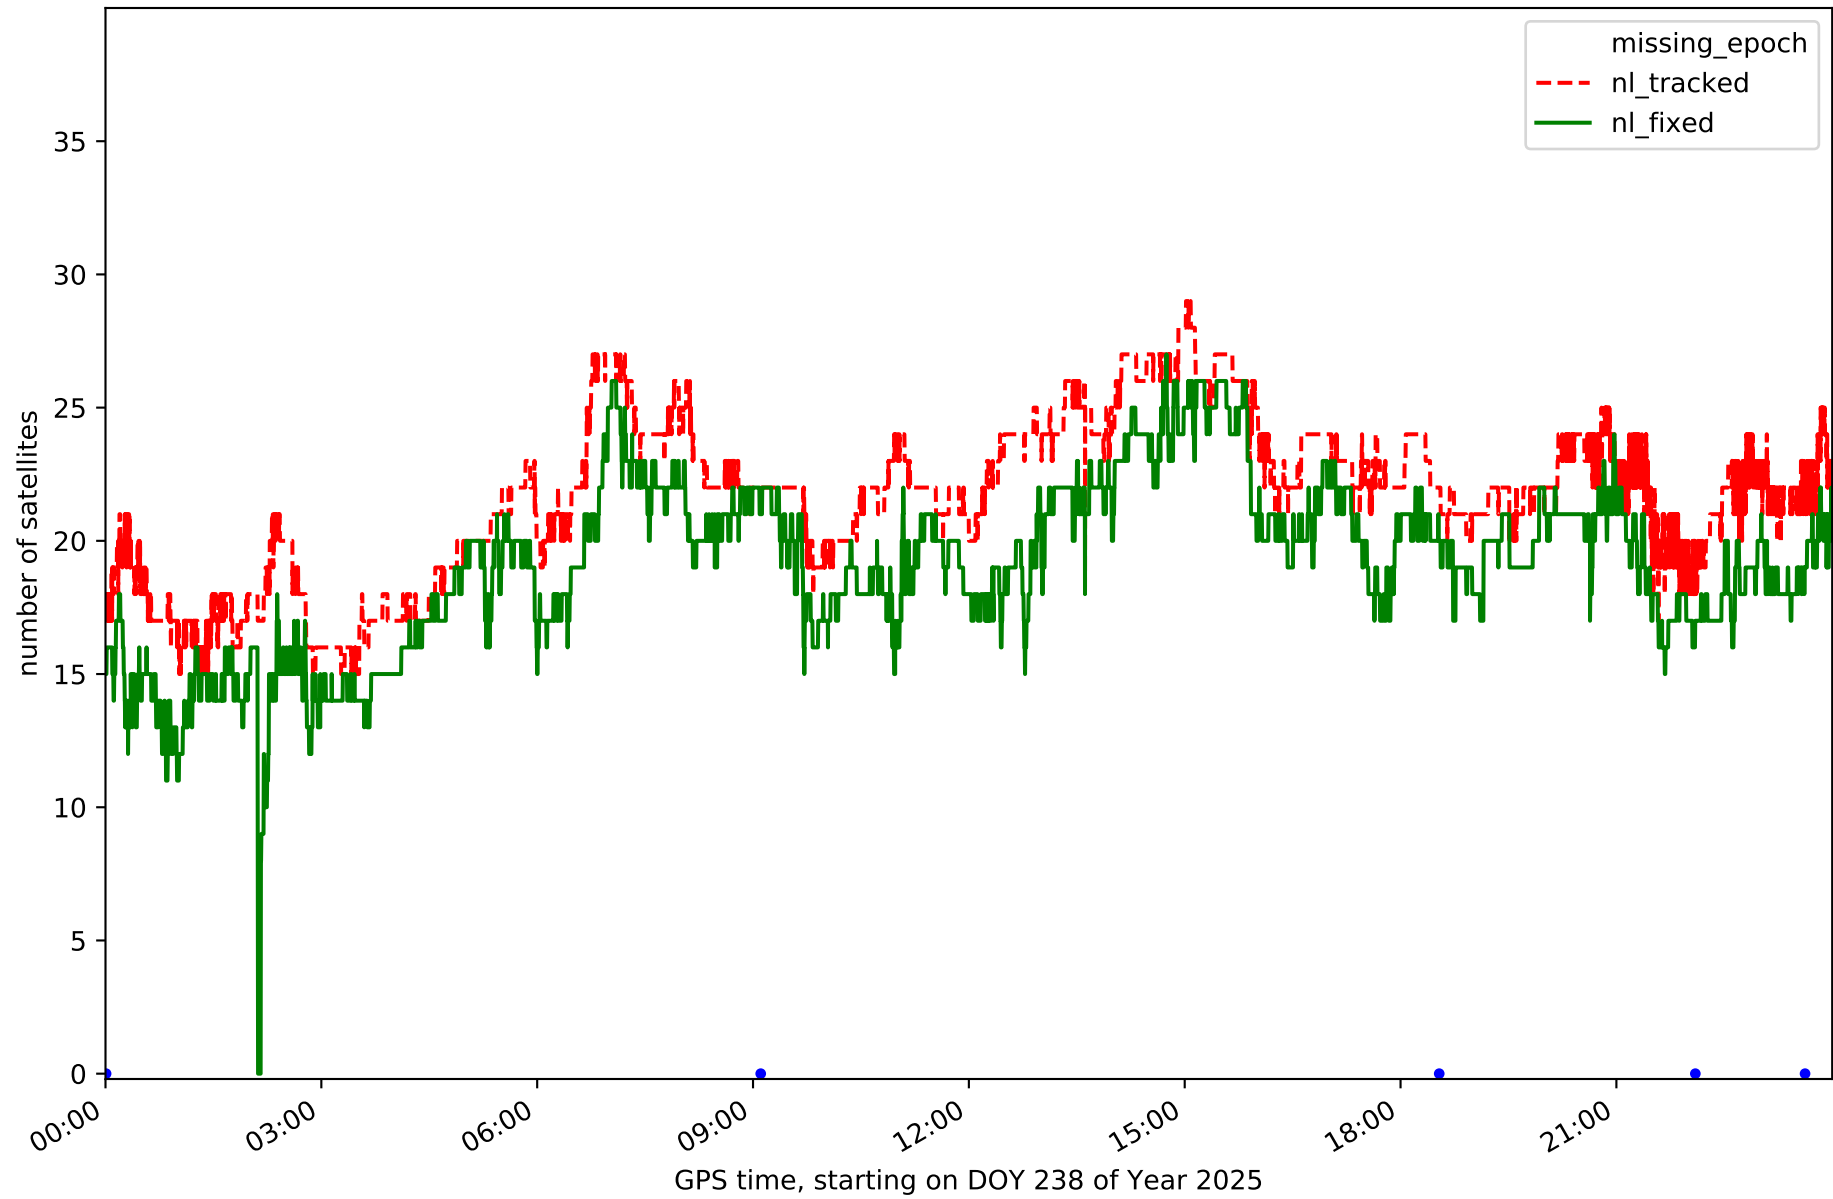


Station IZAN in network N32T

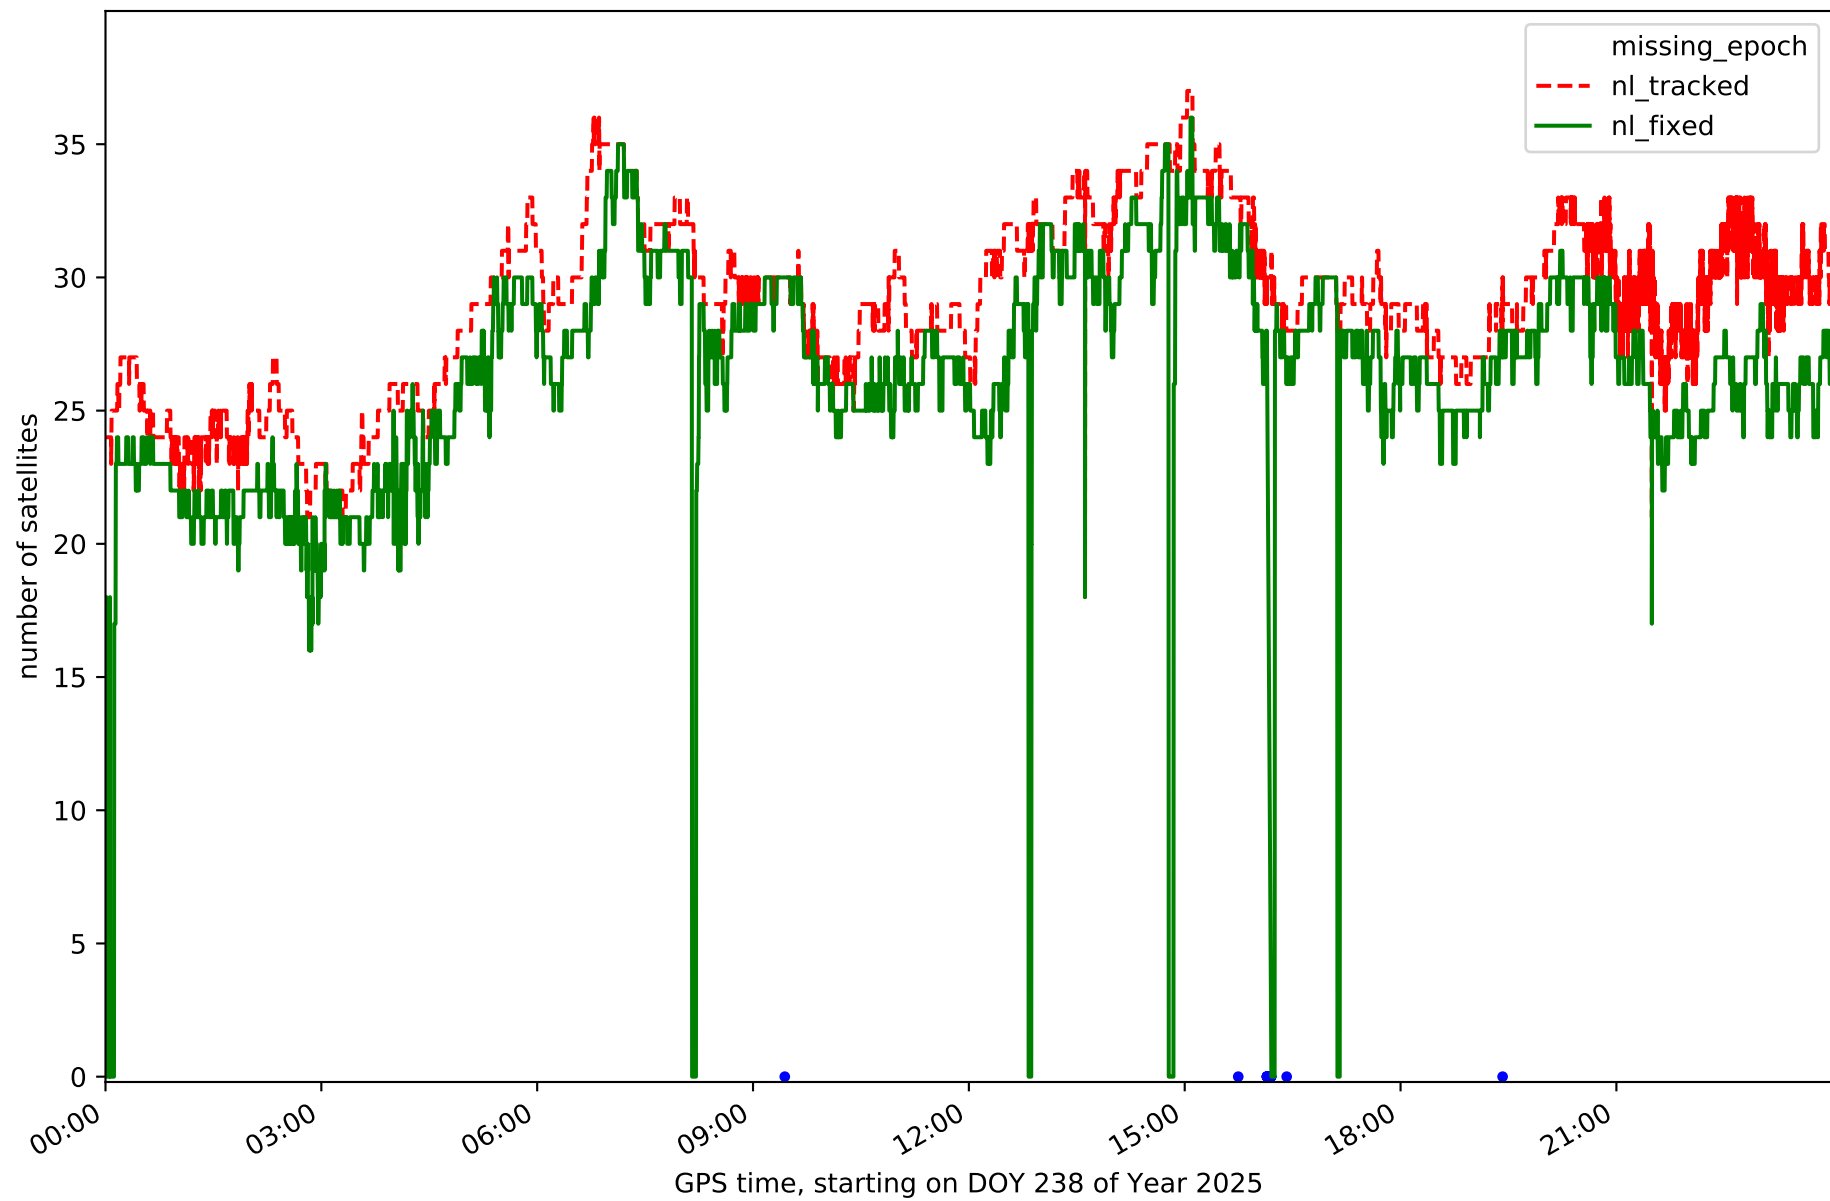


Station LP01 in network N32T

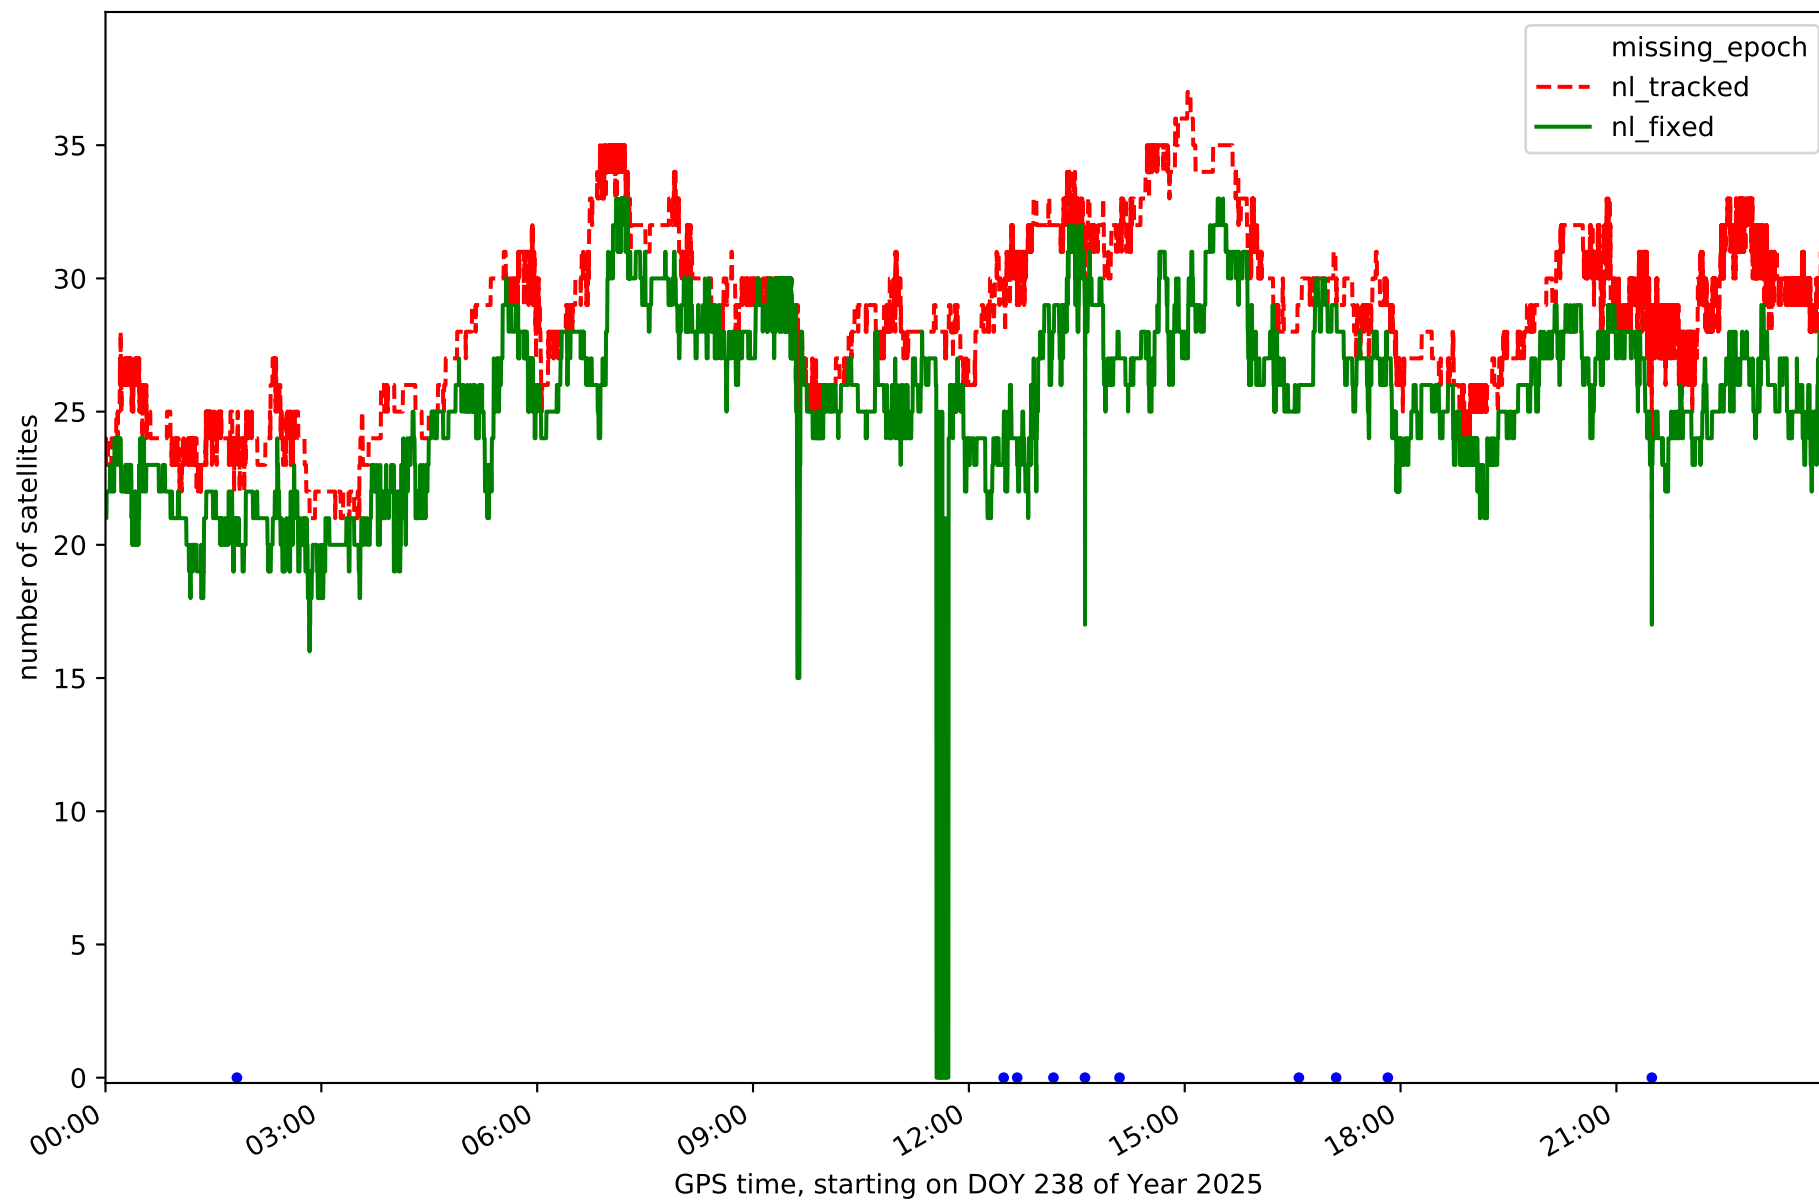


Station LP03 in network N32T

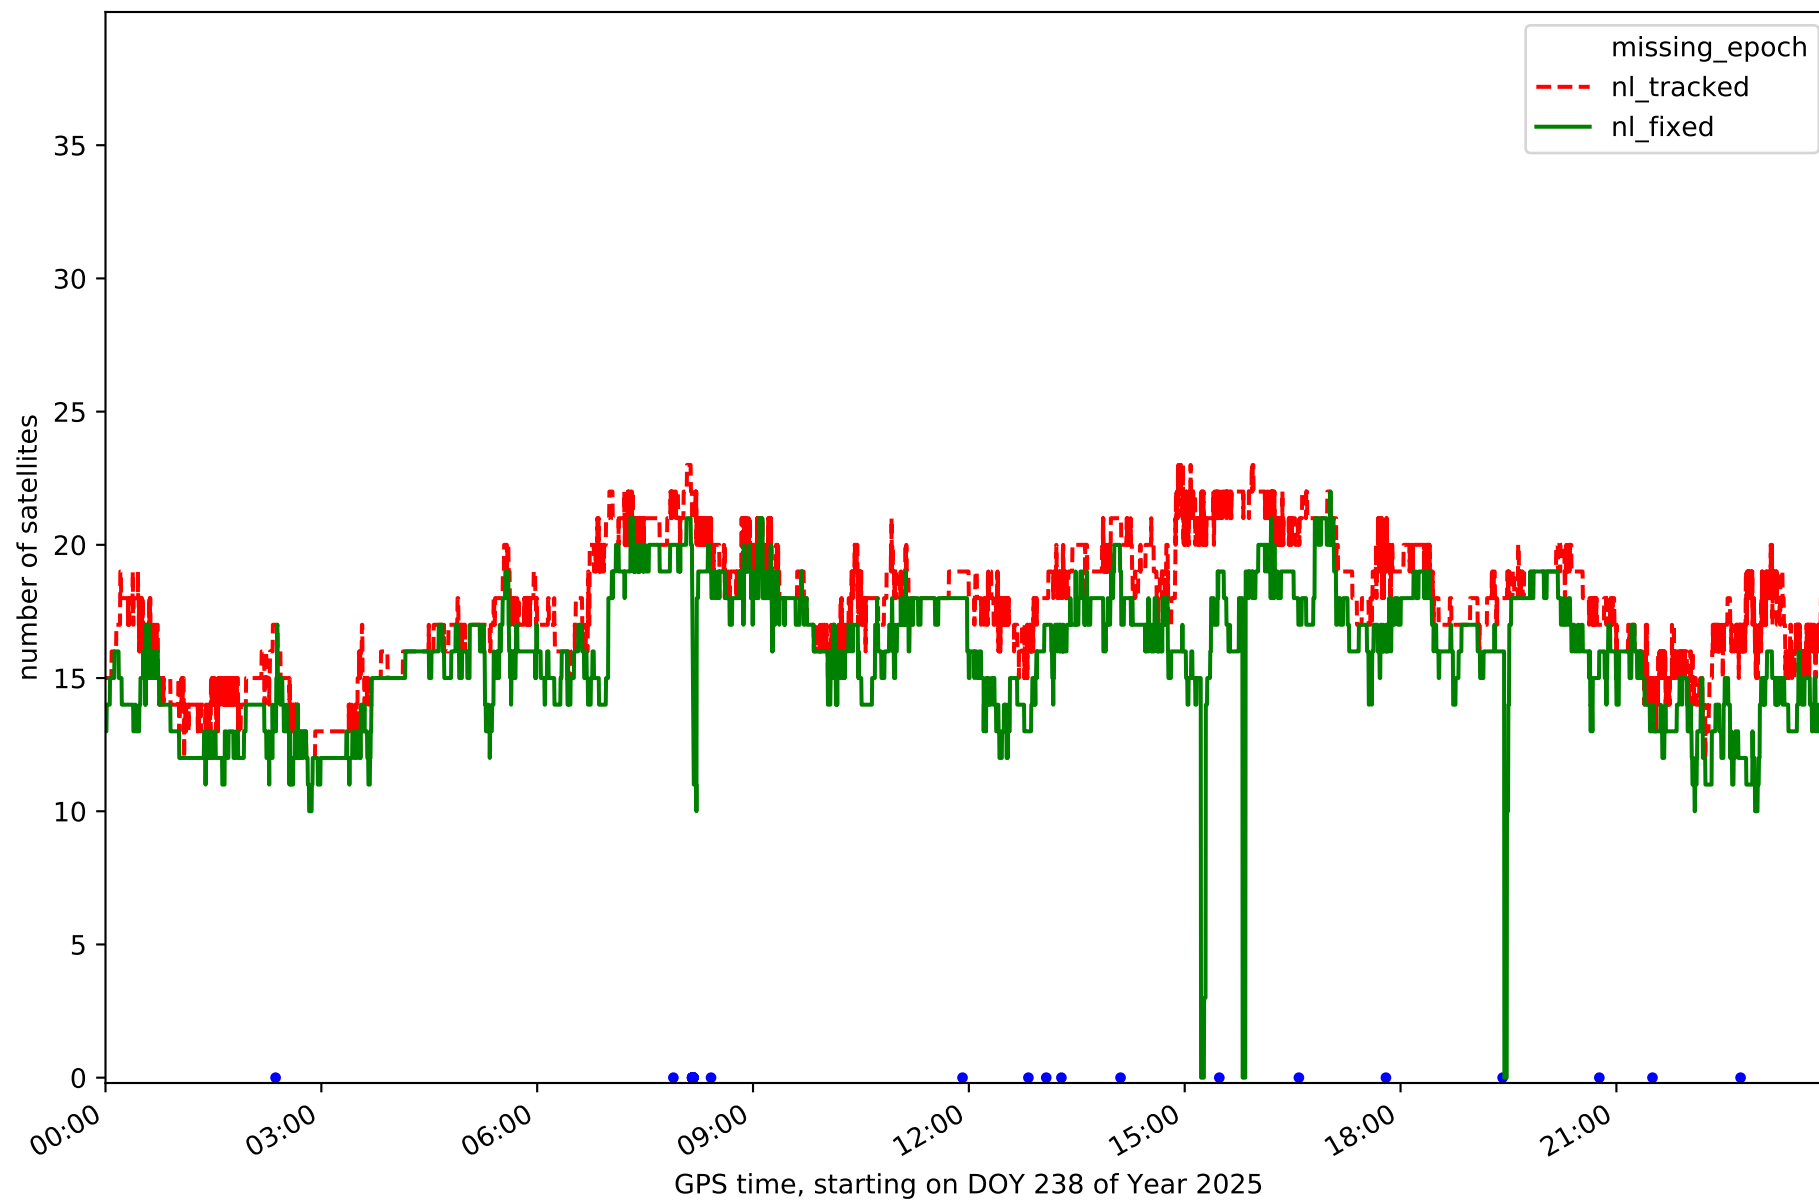


Station LPAL in network N32T

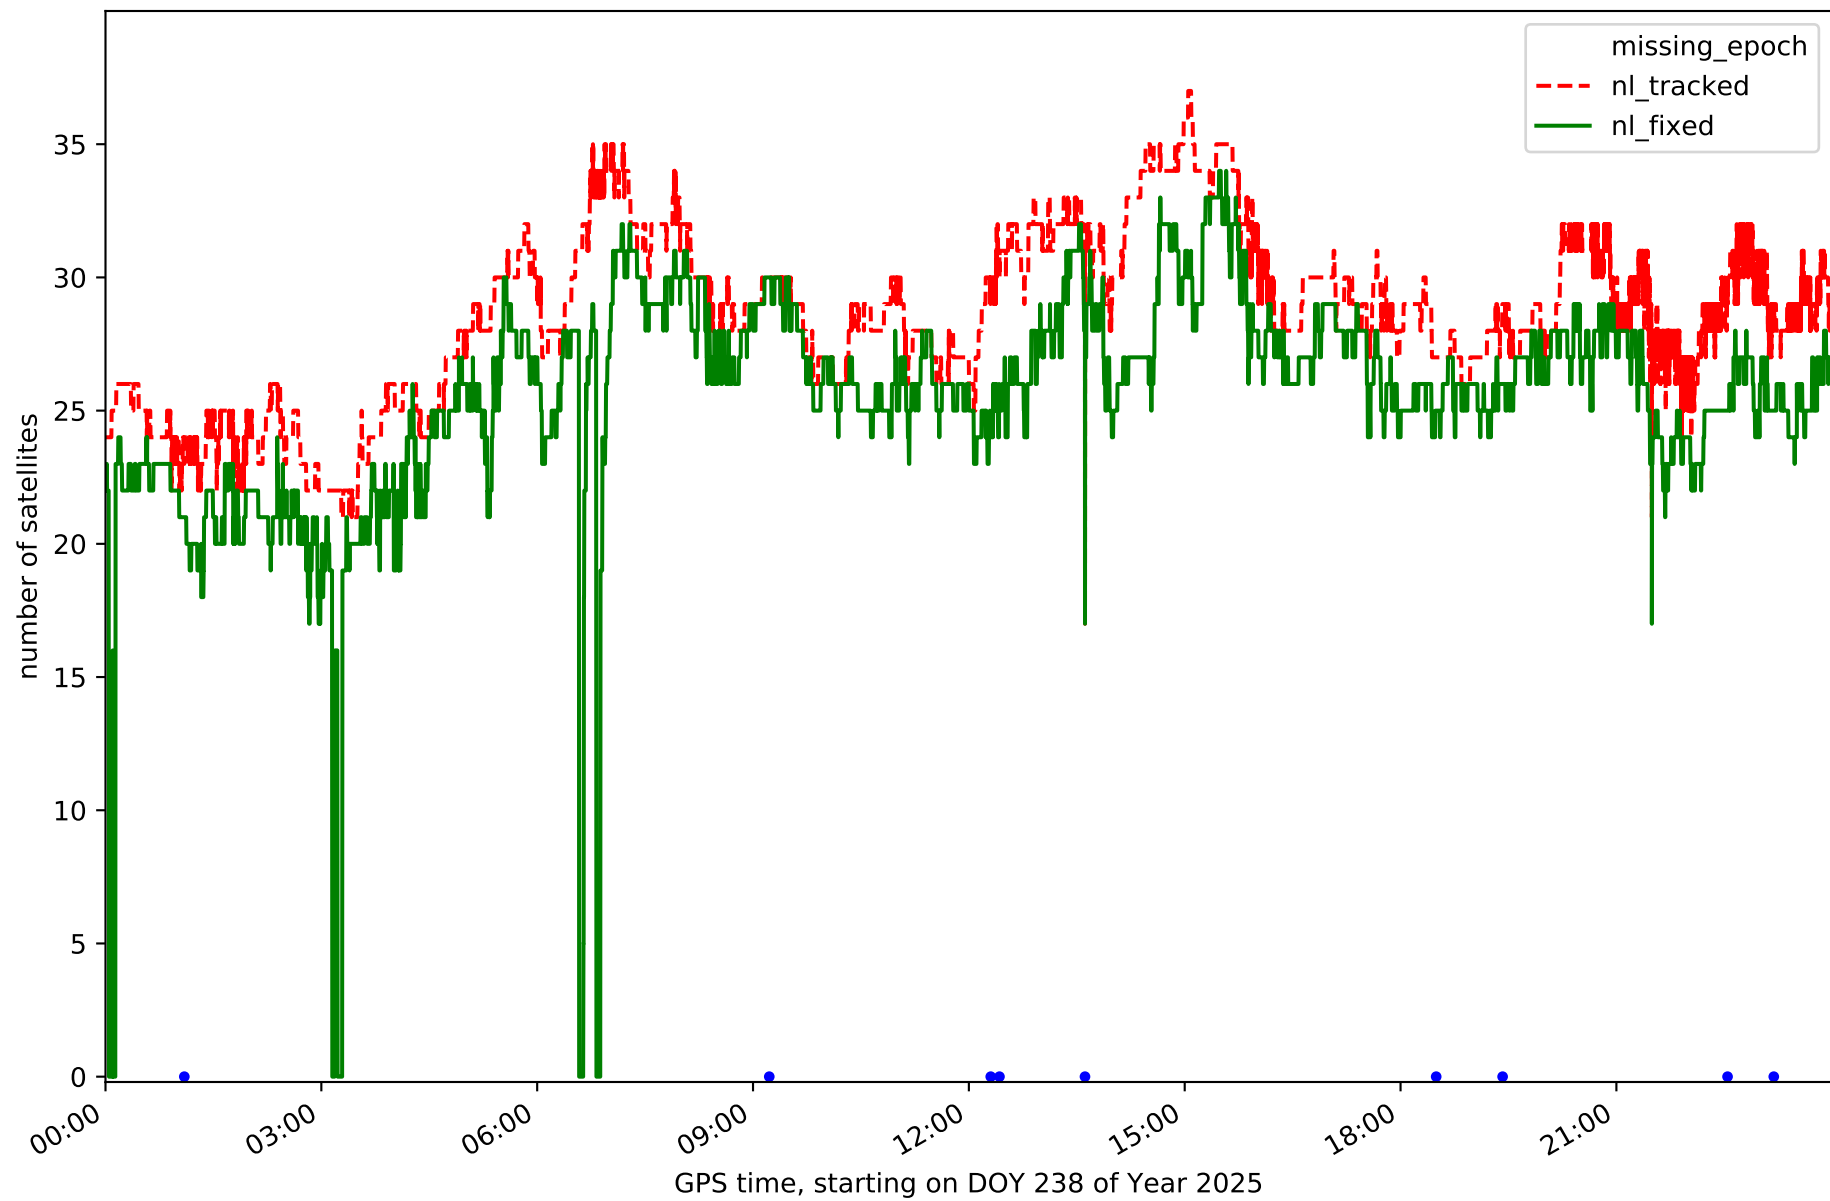


Station LRES in network N32T

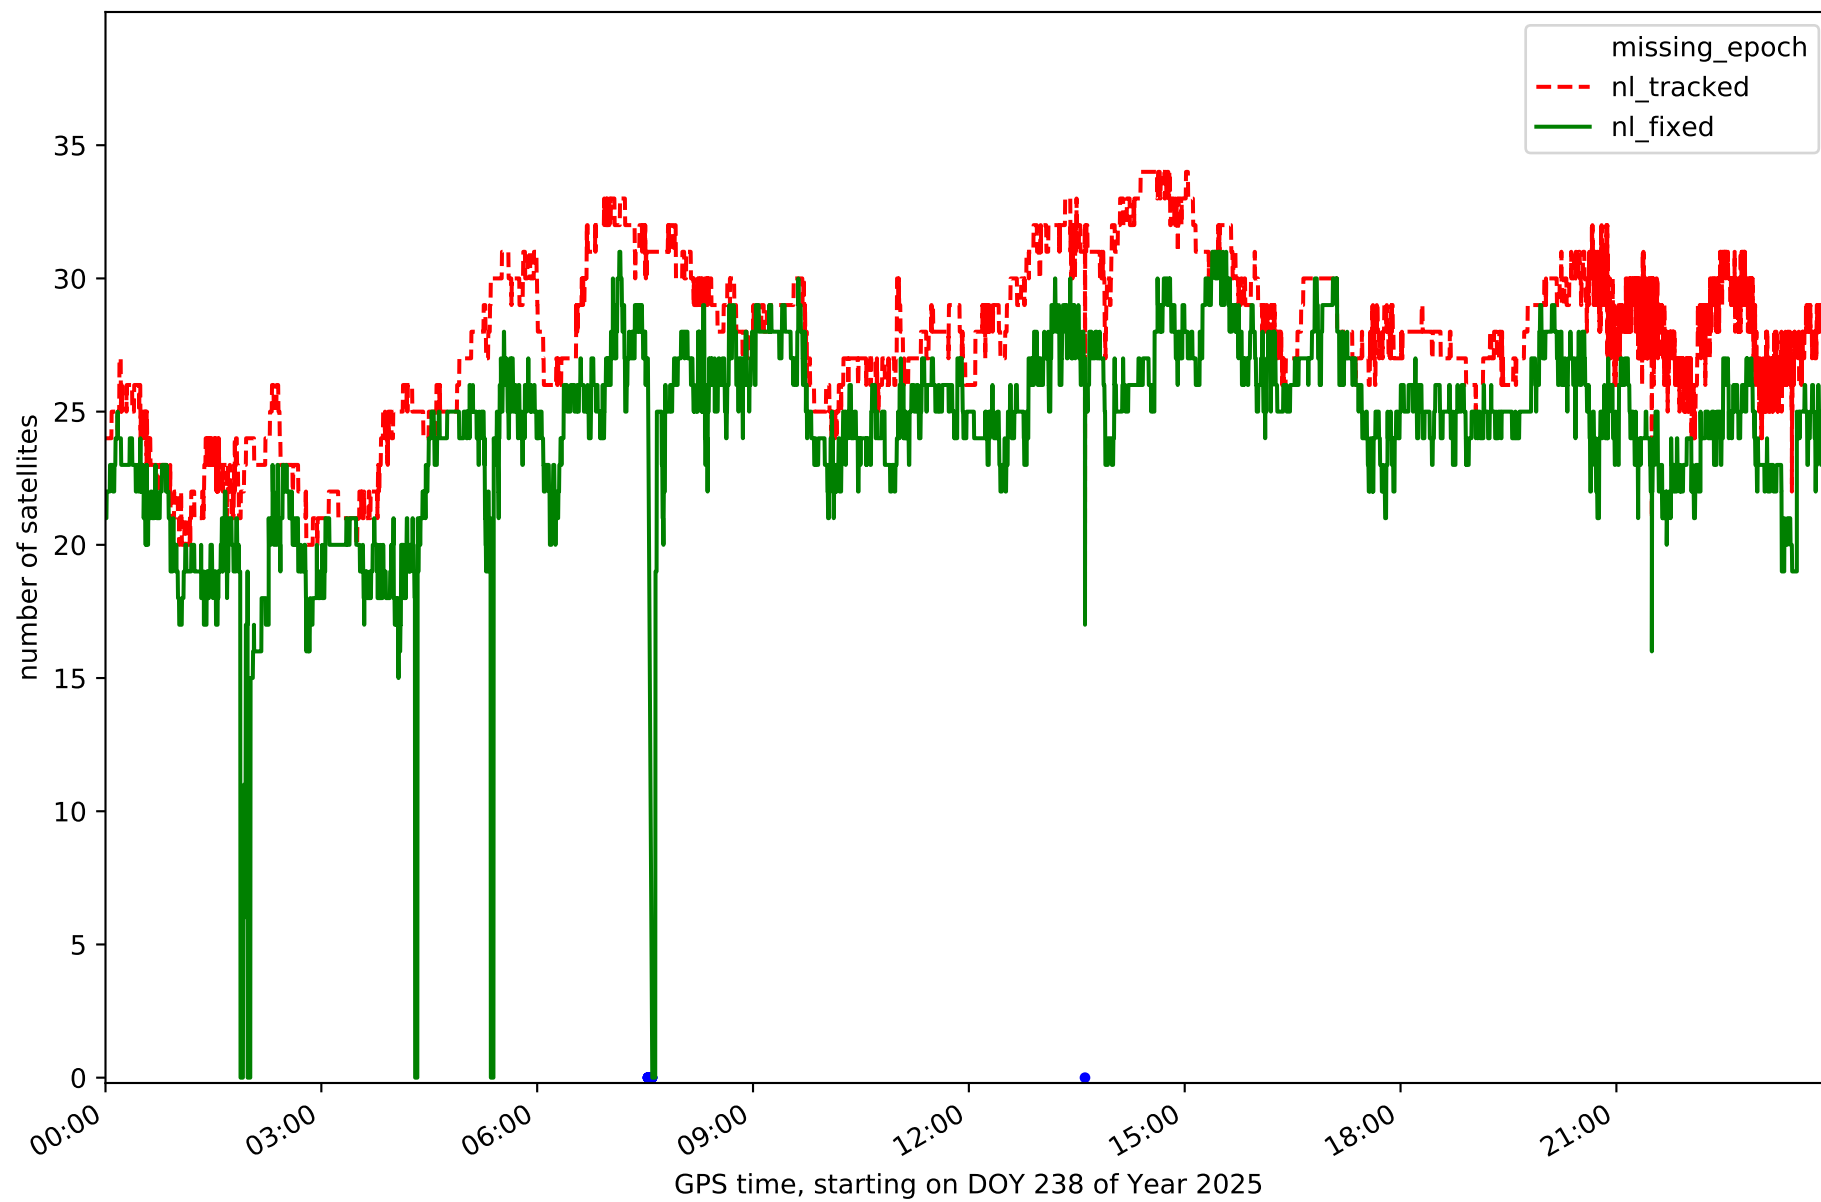


Station TN01 in network N32T

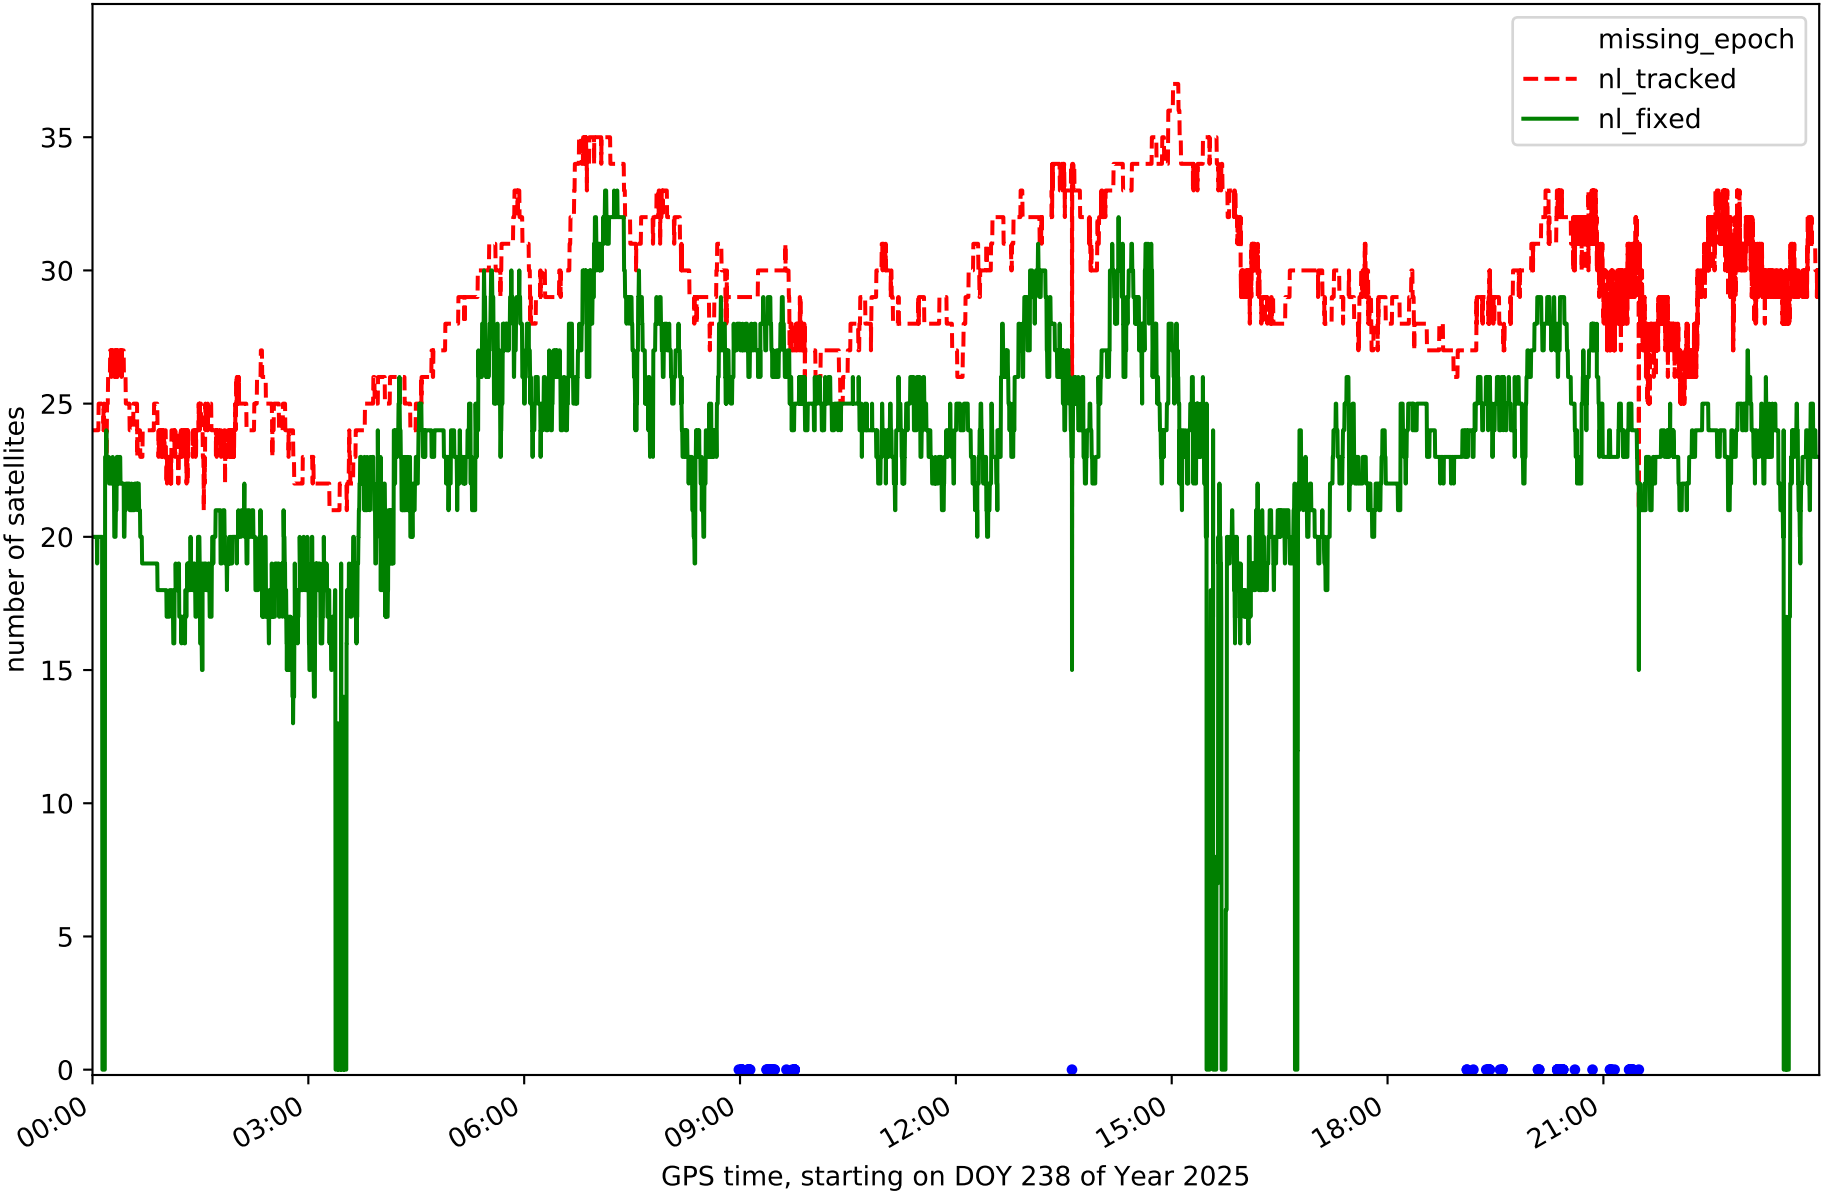


Station TN02 in network N32T

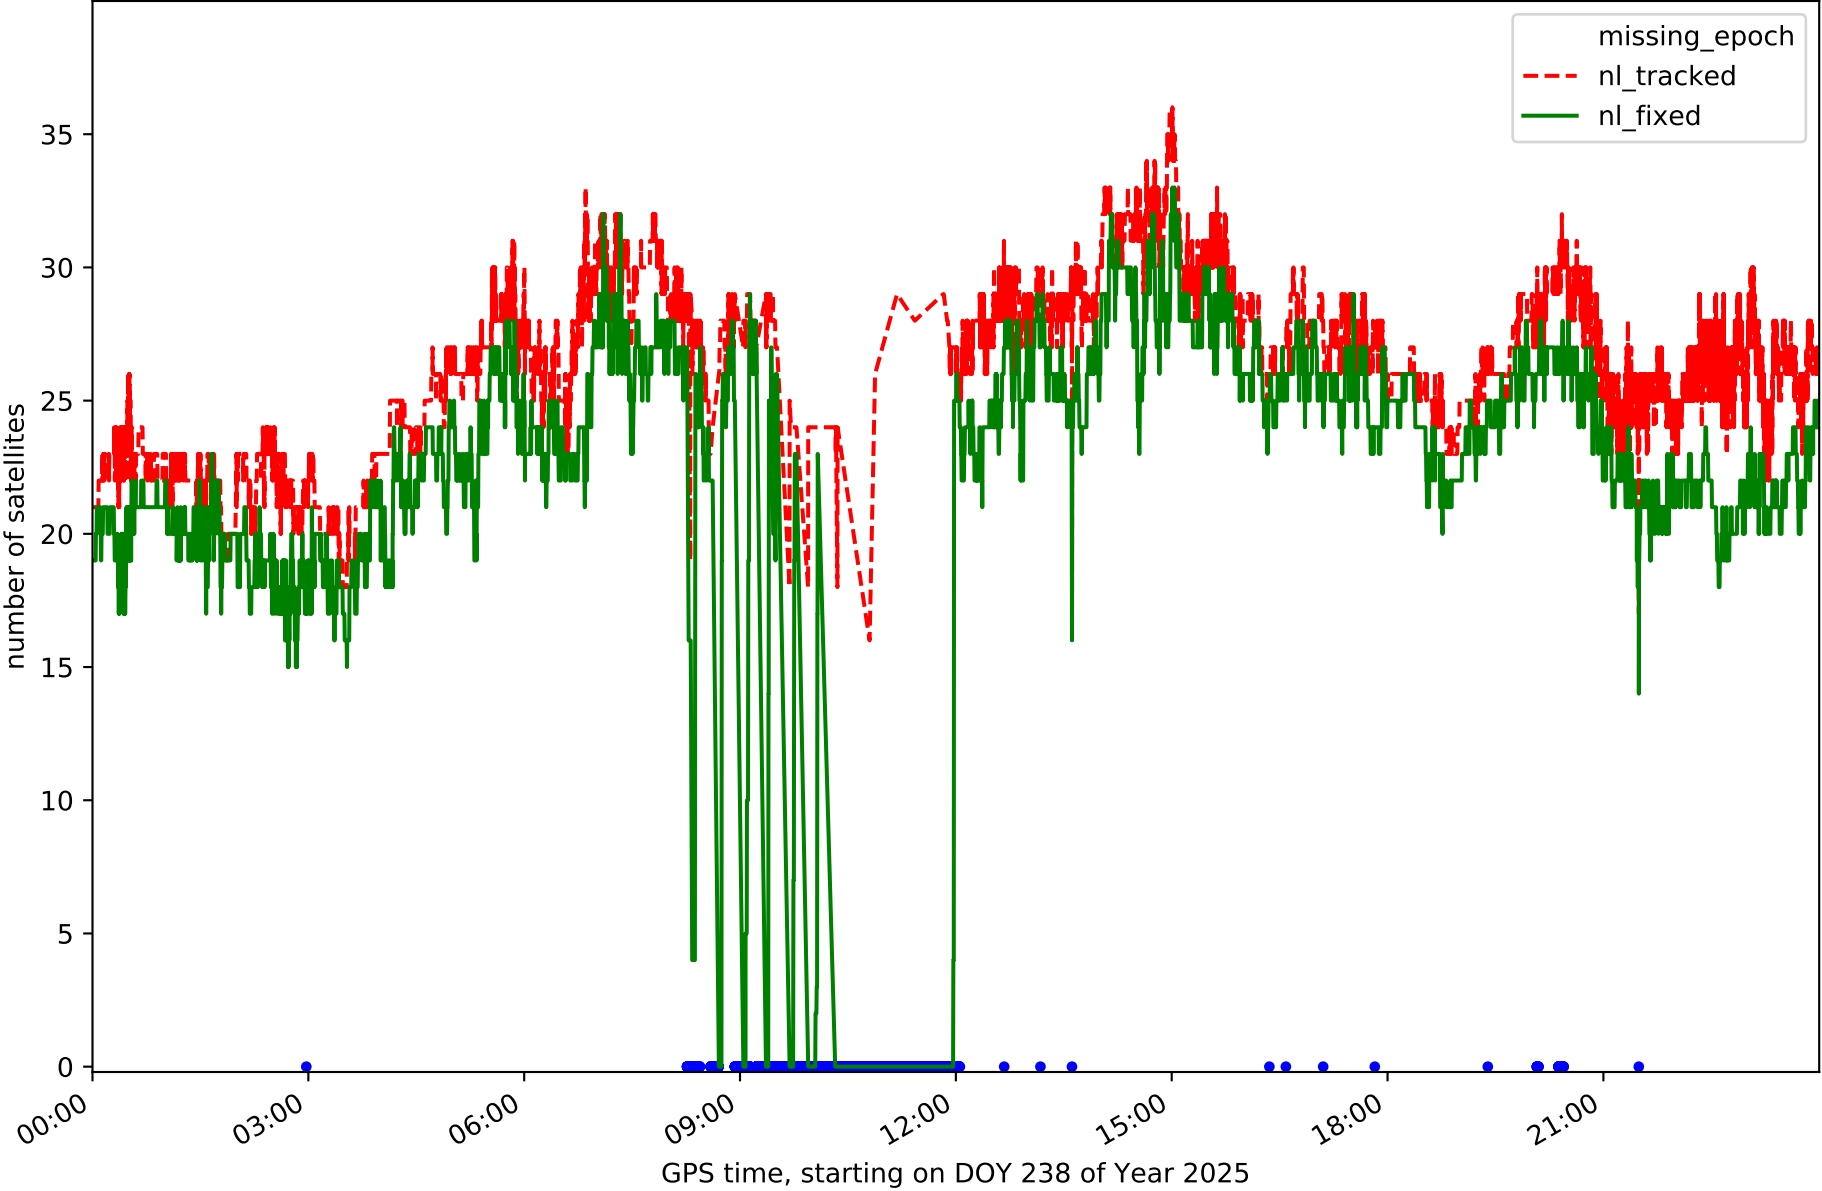


Station TN03 in network N32T

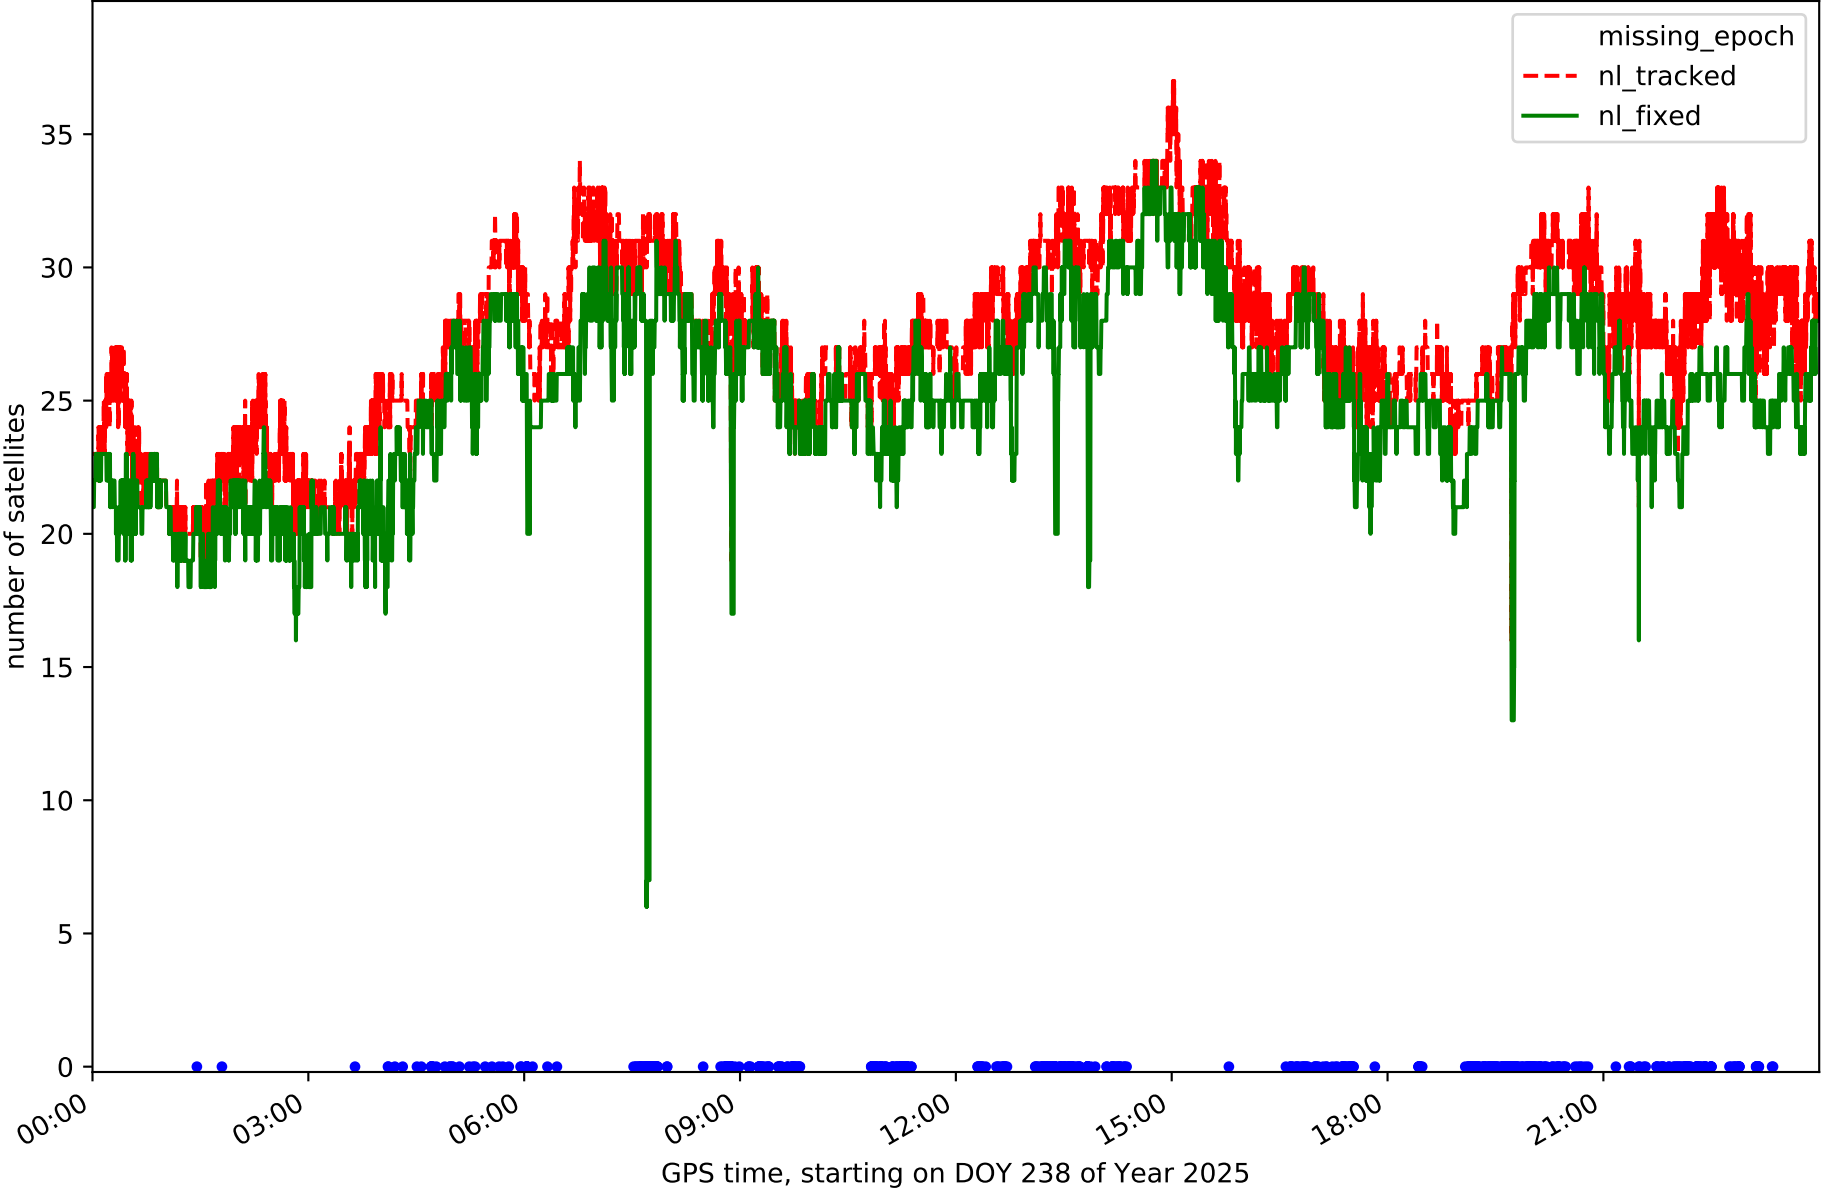


Station TN04 in network N32T

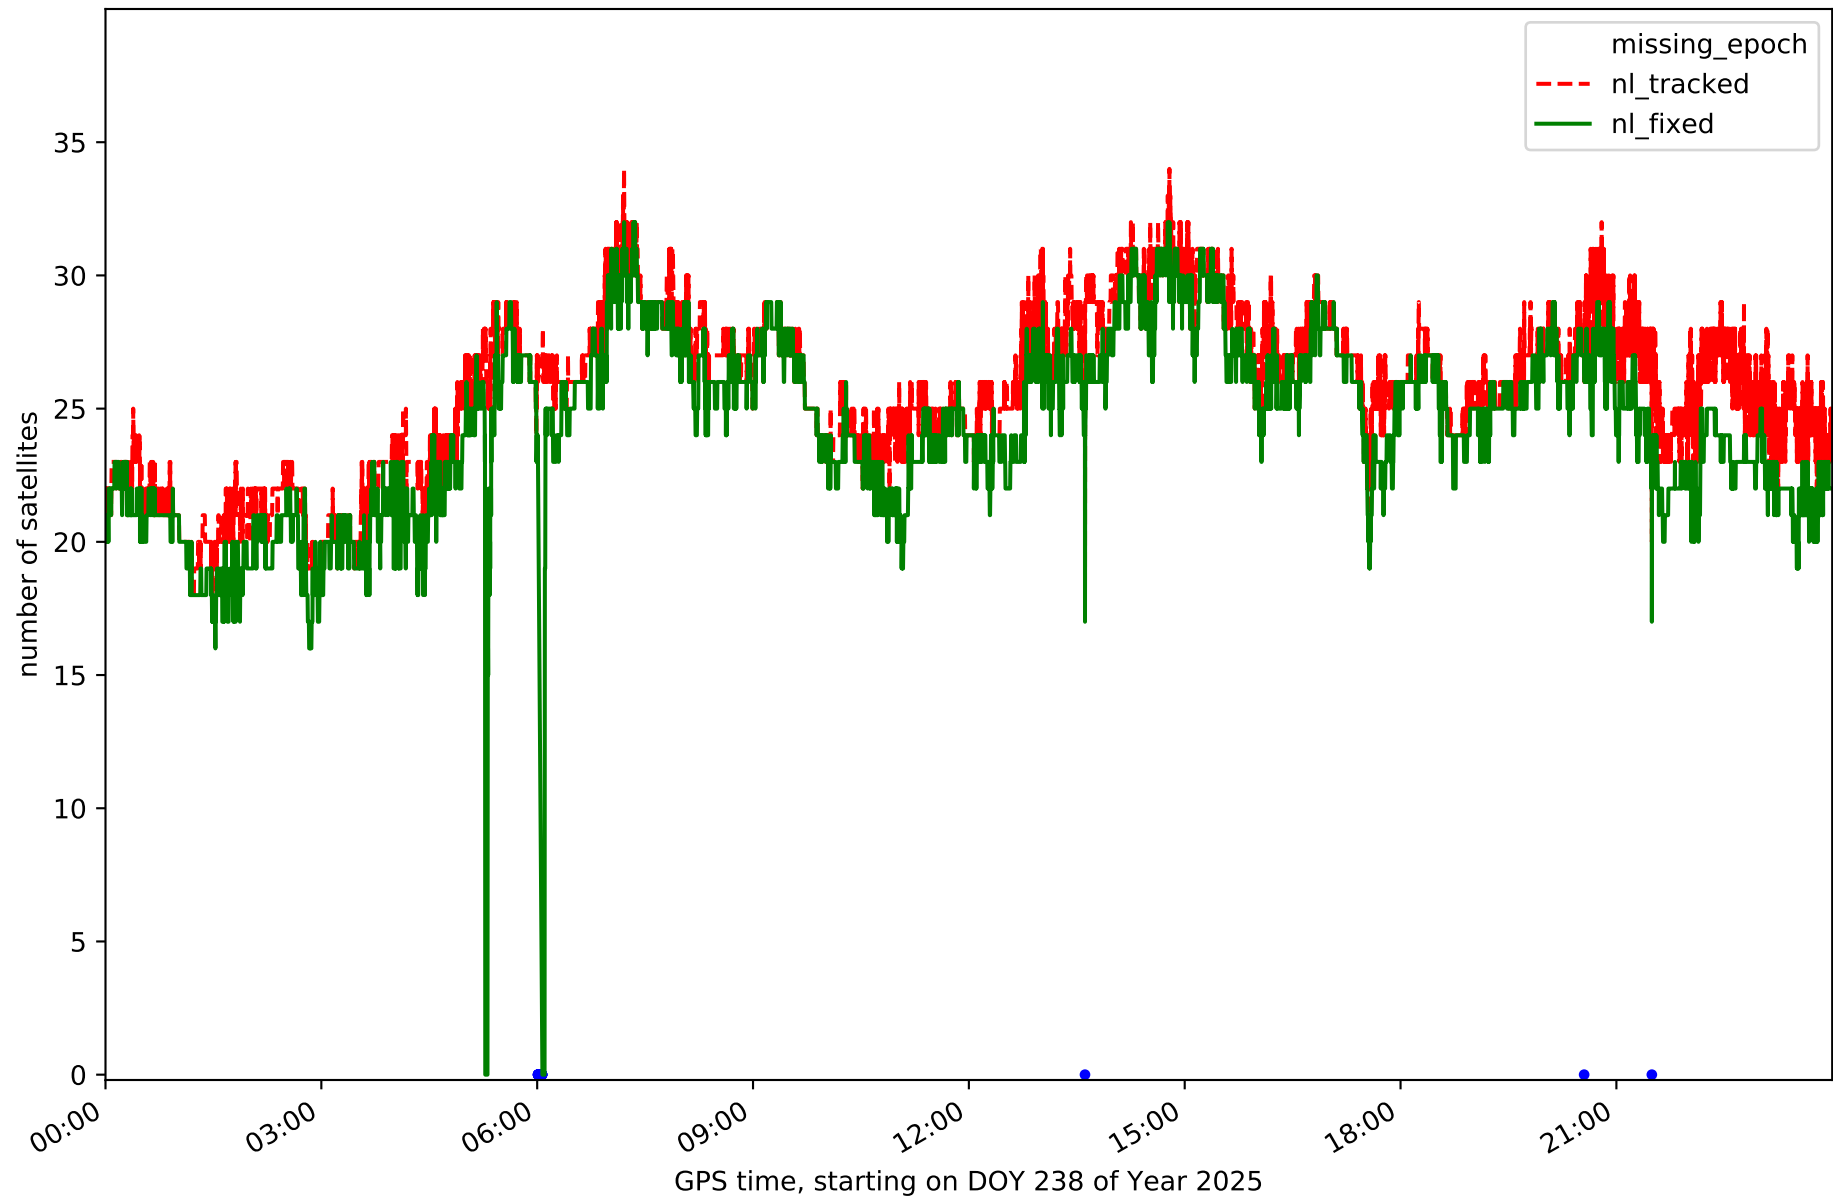


Station TN06 in network N32T

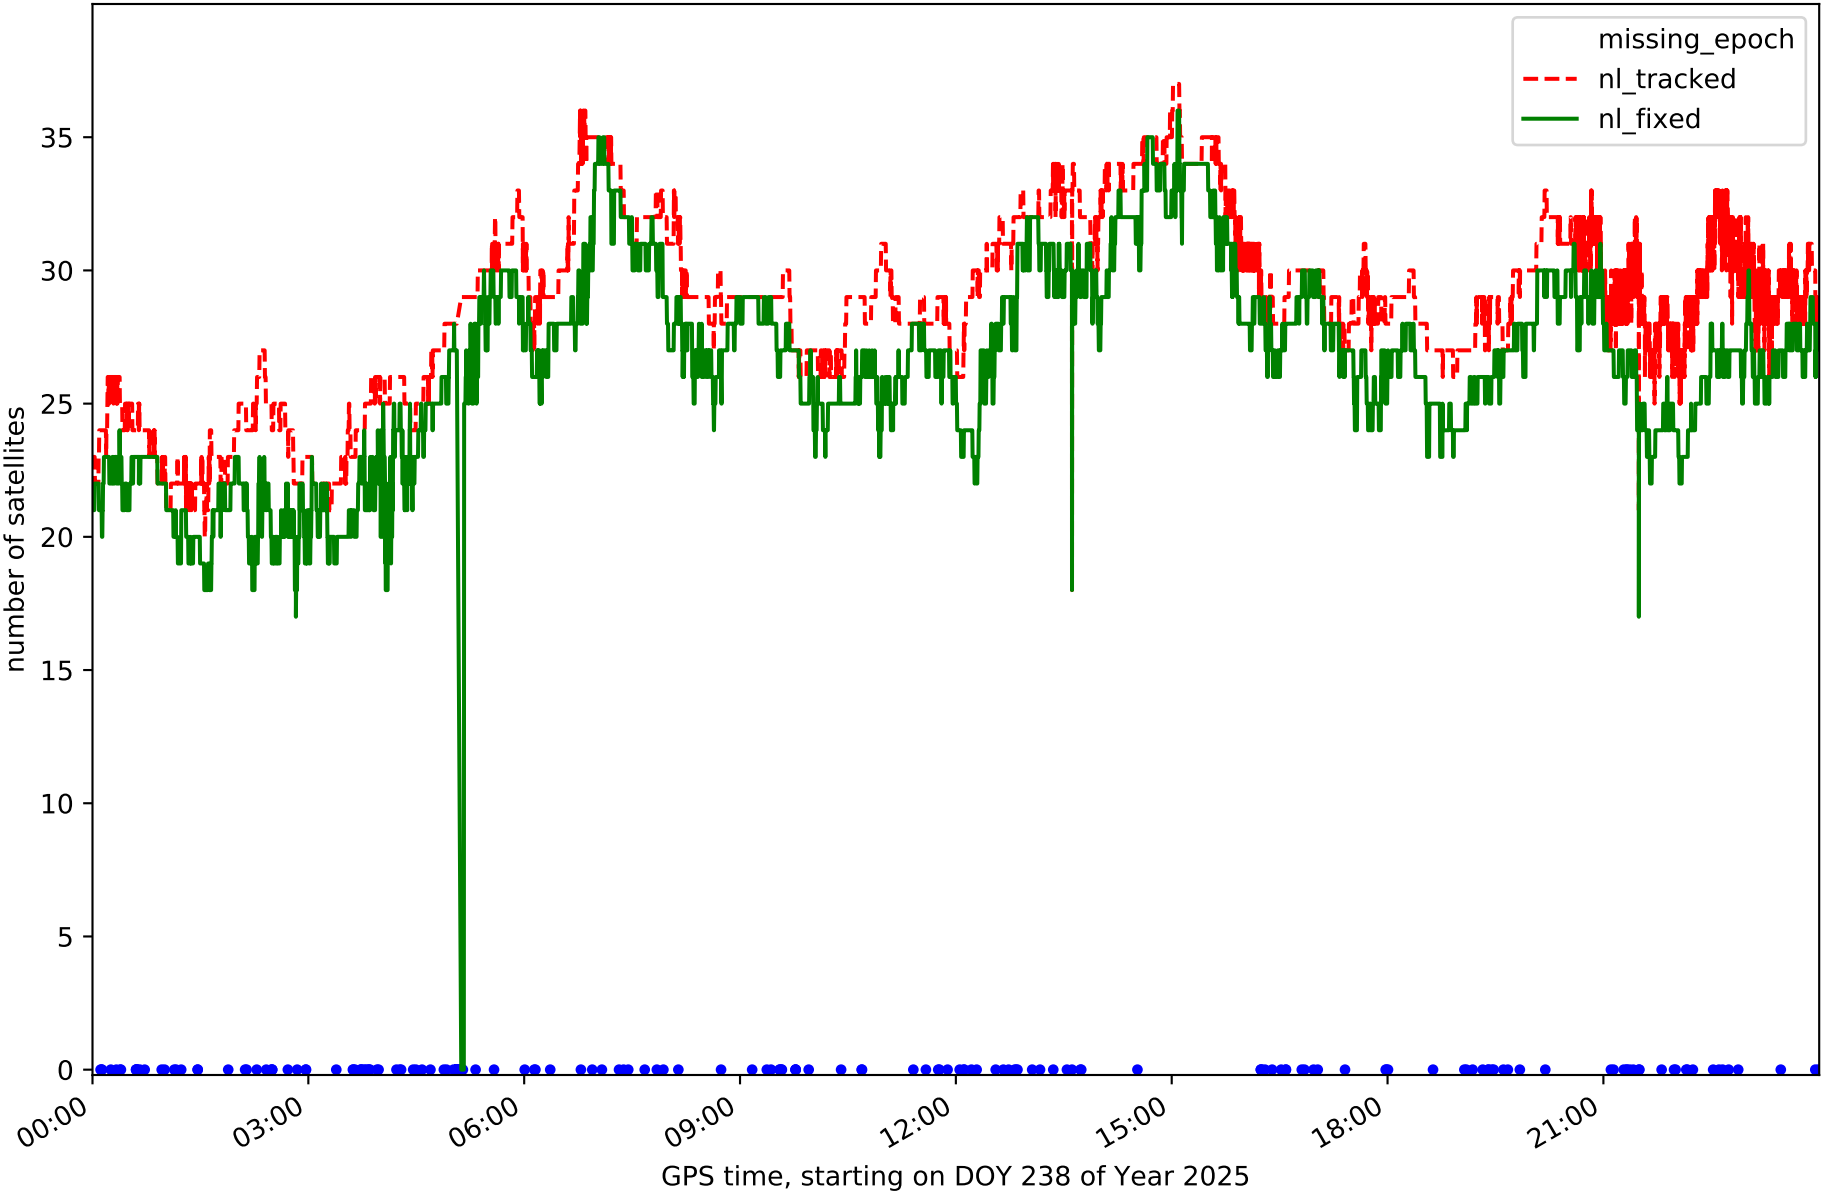


Station TN09 in network N32T

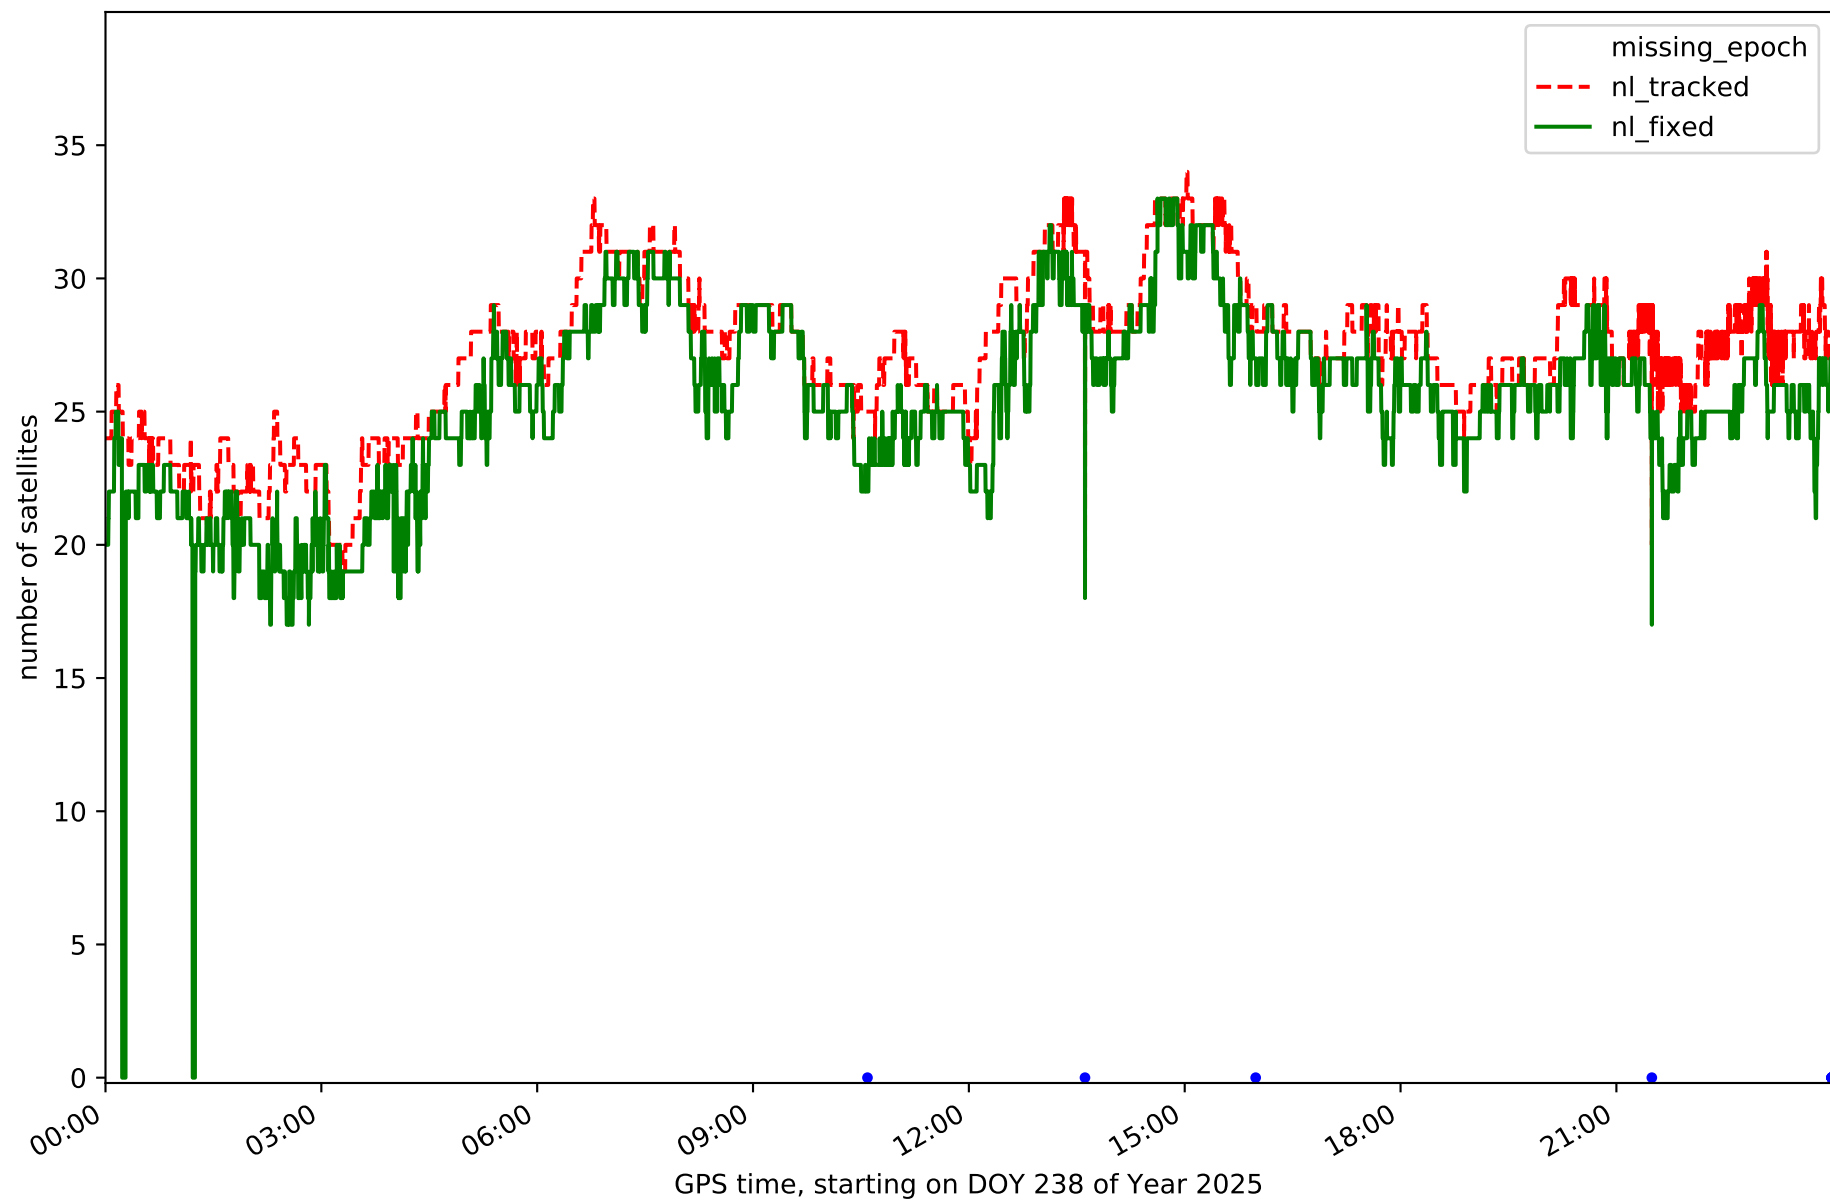


Station TE11 in network N32T

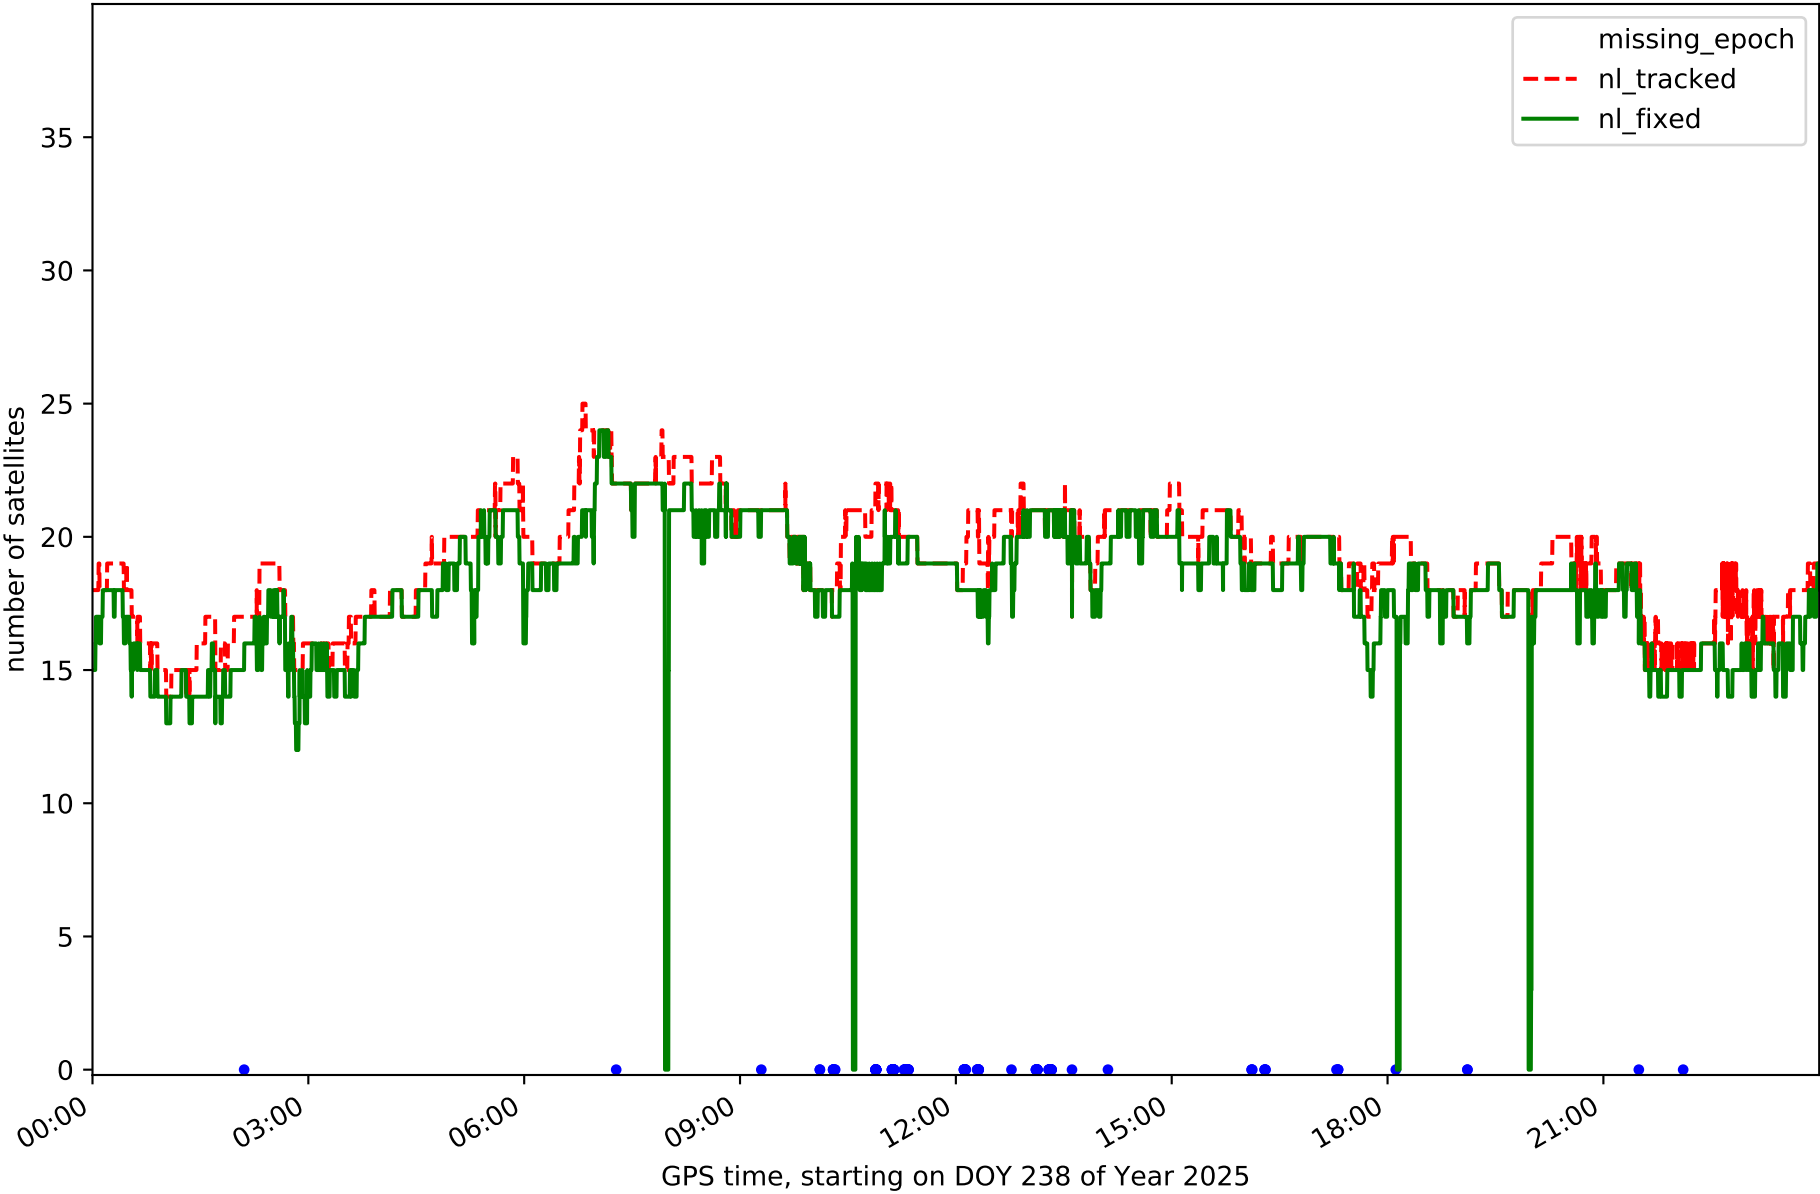


RefCheck for station EH01 in network N32T

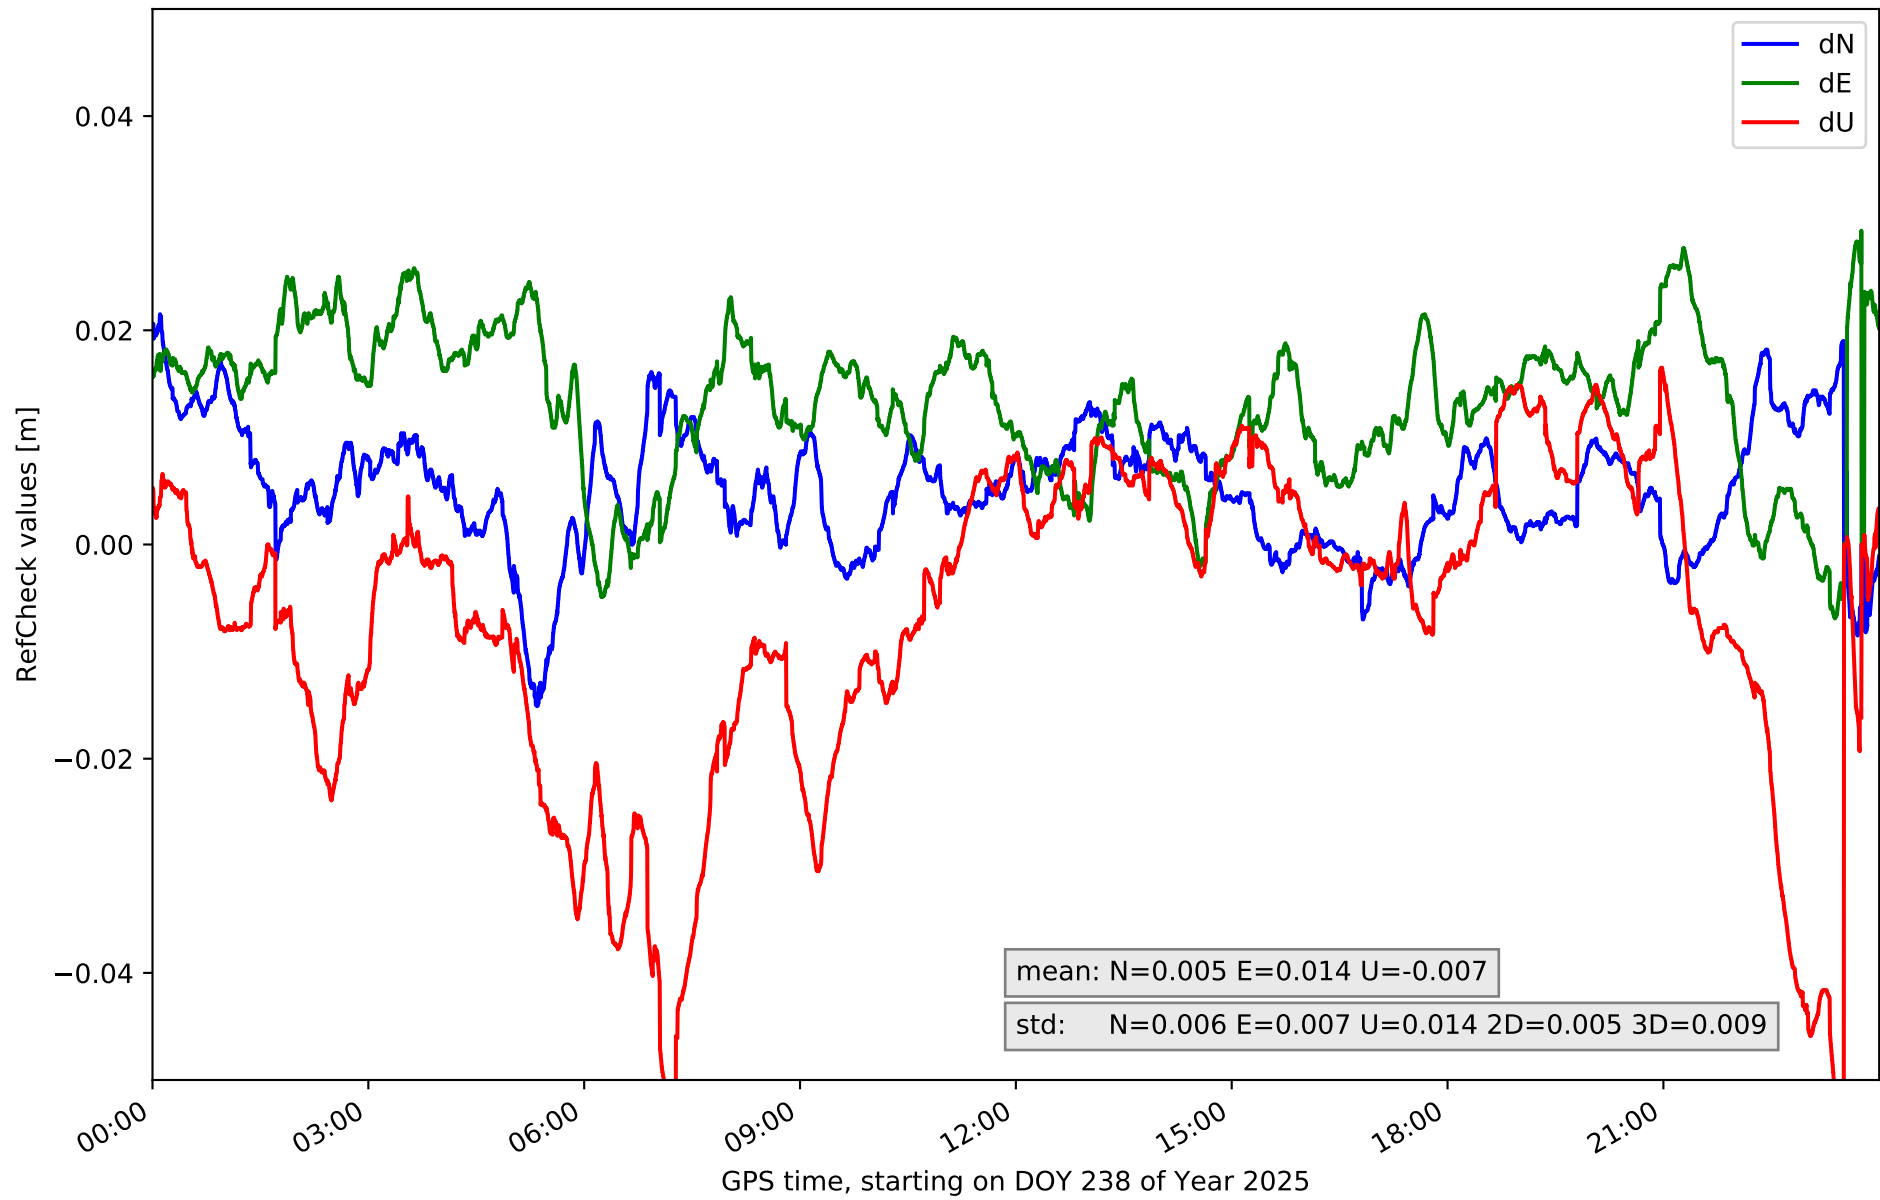


RefCheck for station EH02 in network N32T

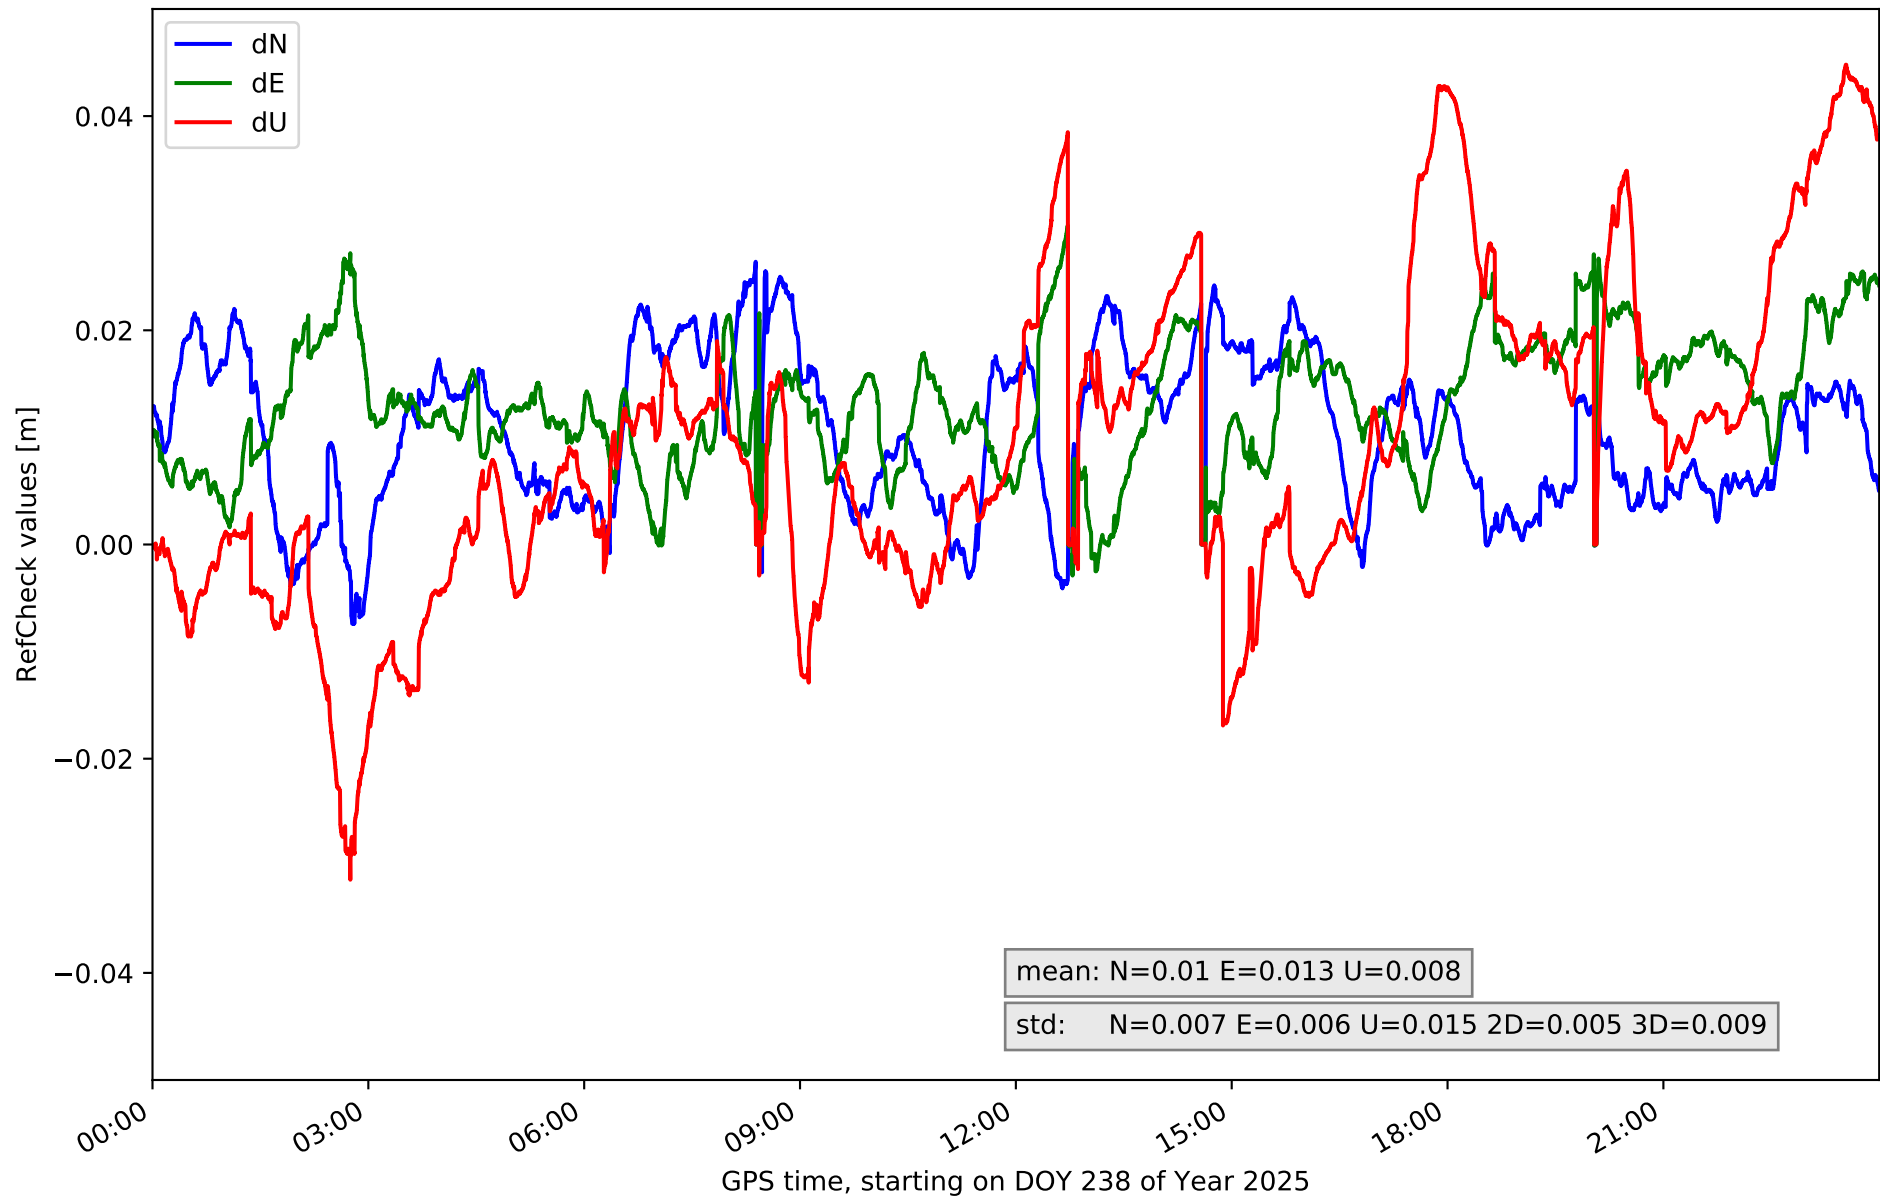


RefCheck for station GOM1 in network N32T

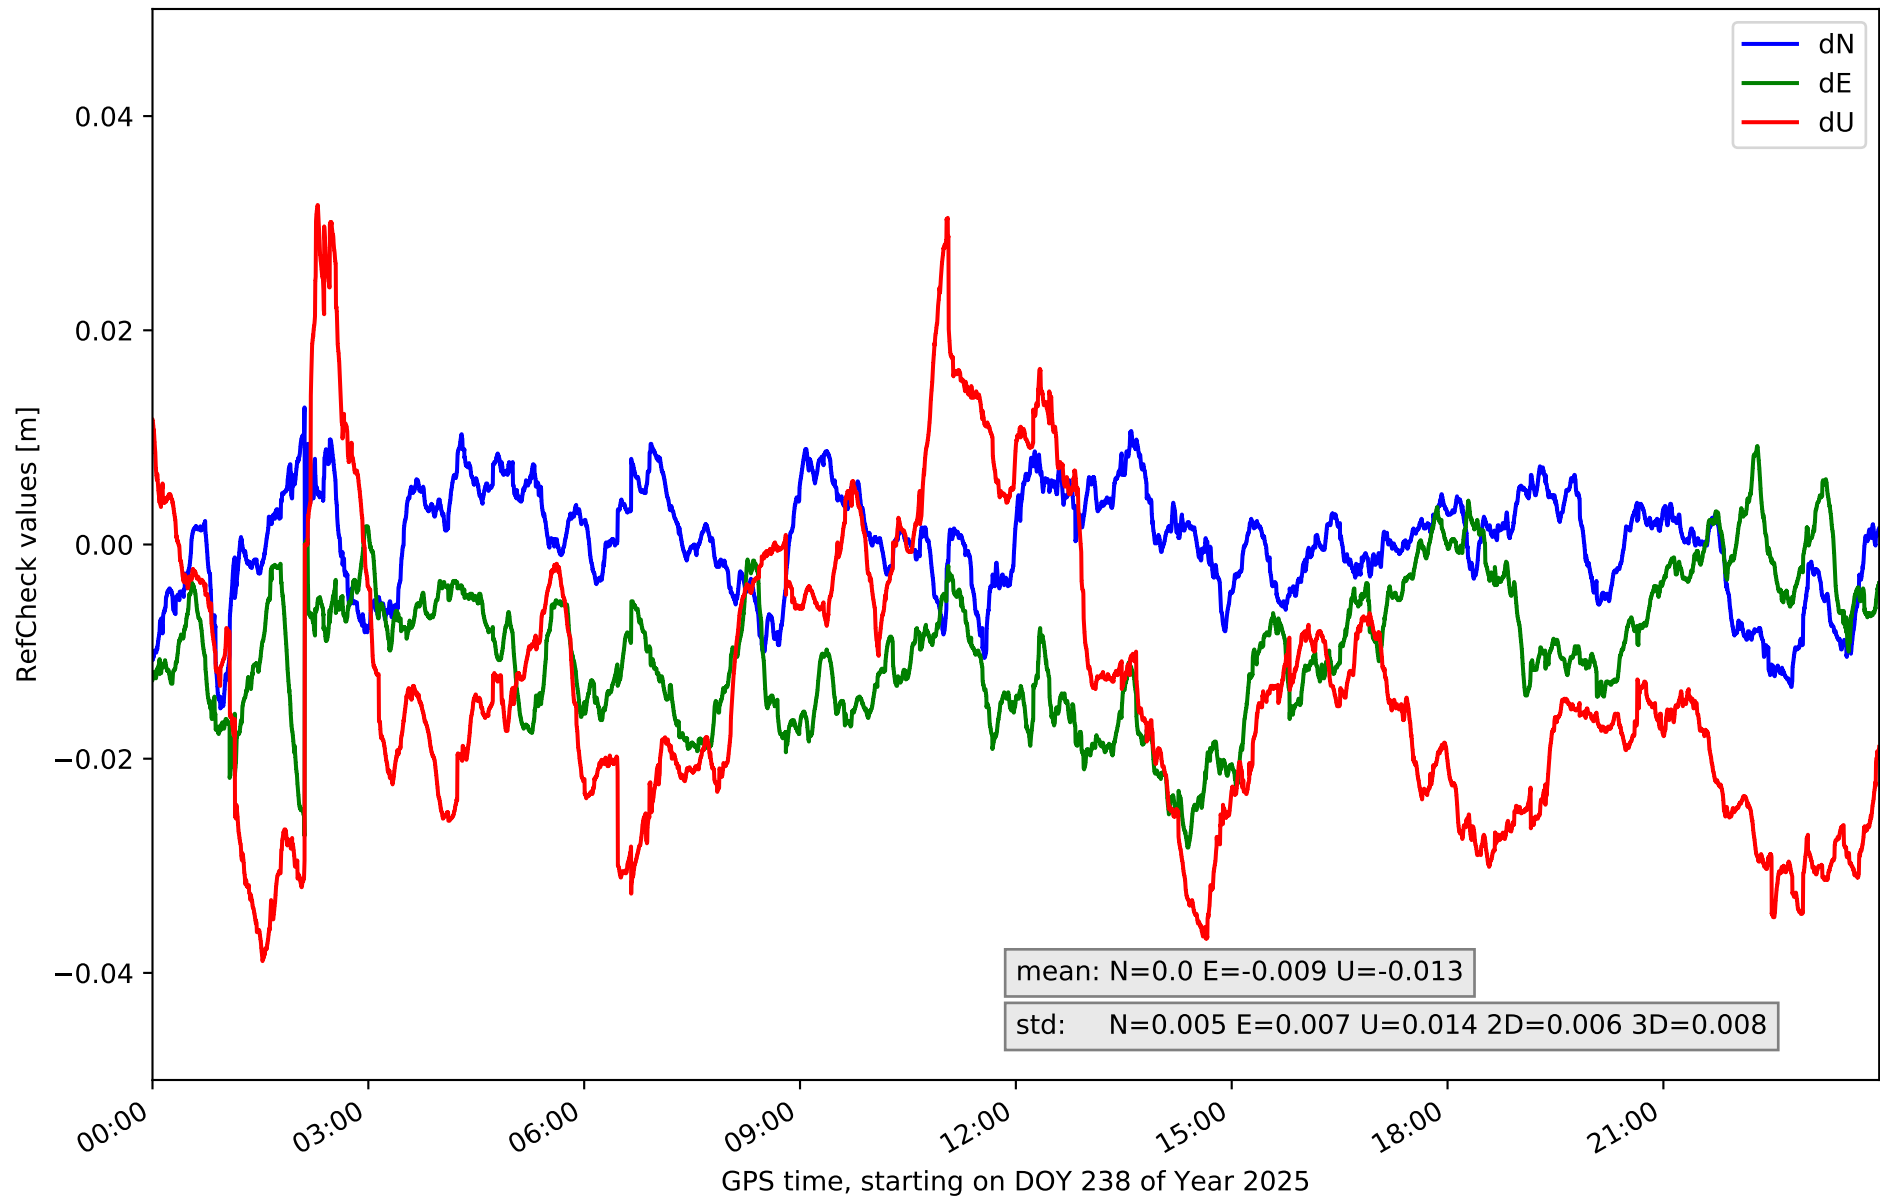


RefCheck for station IZAN in network N32T

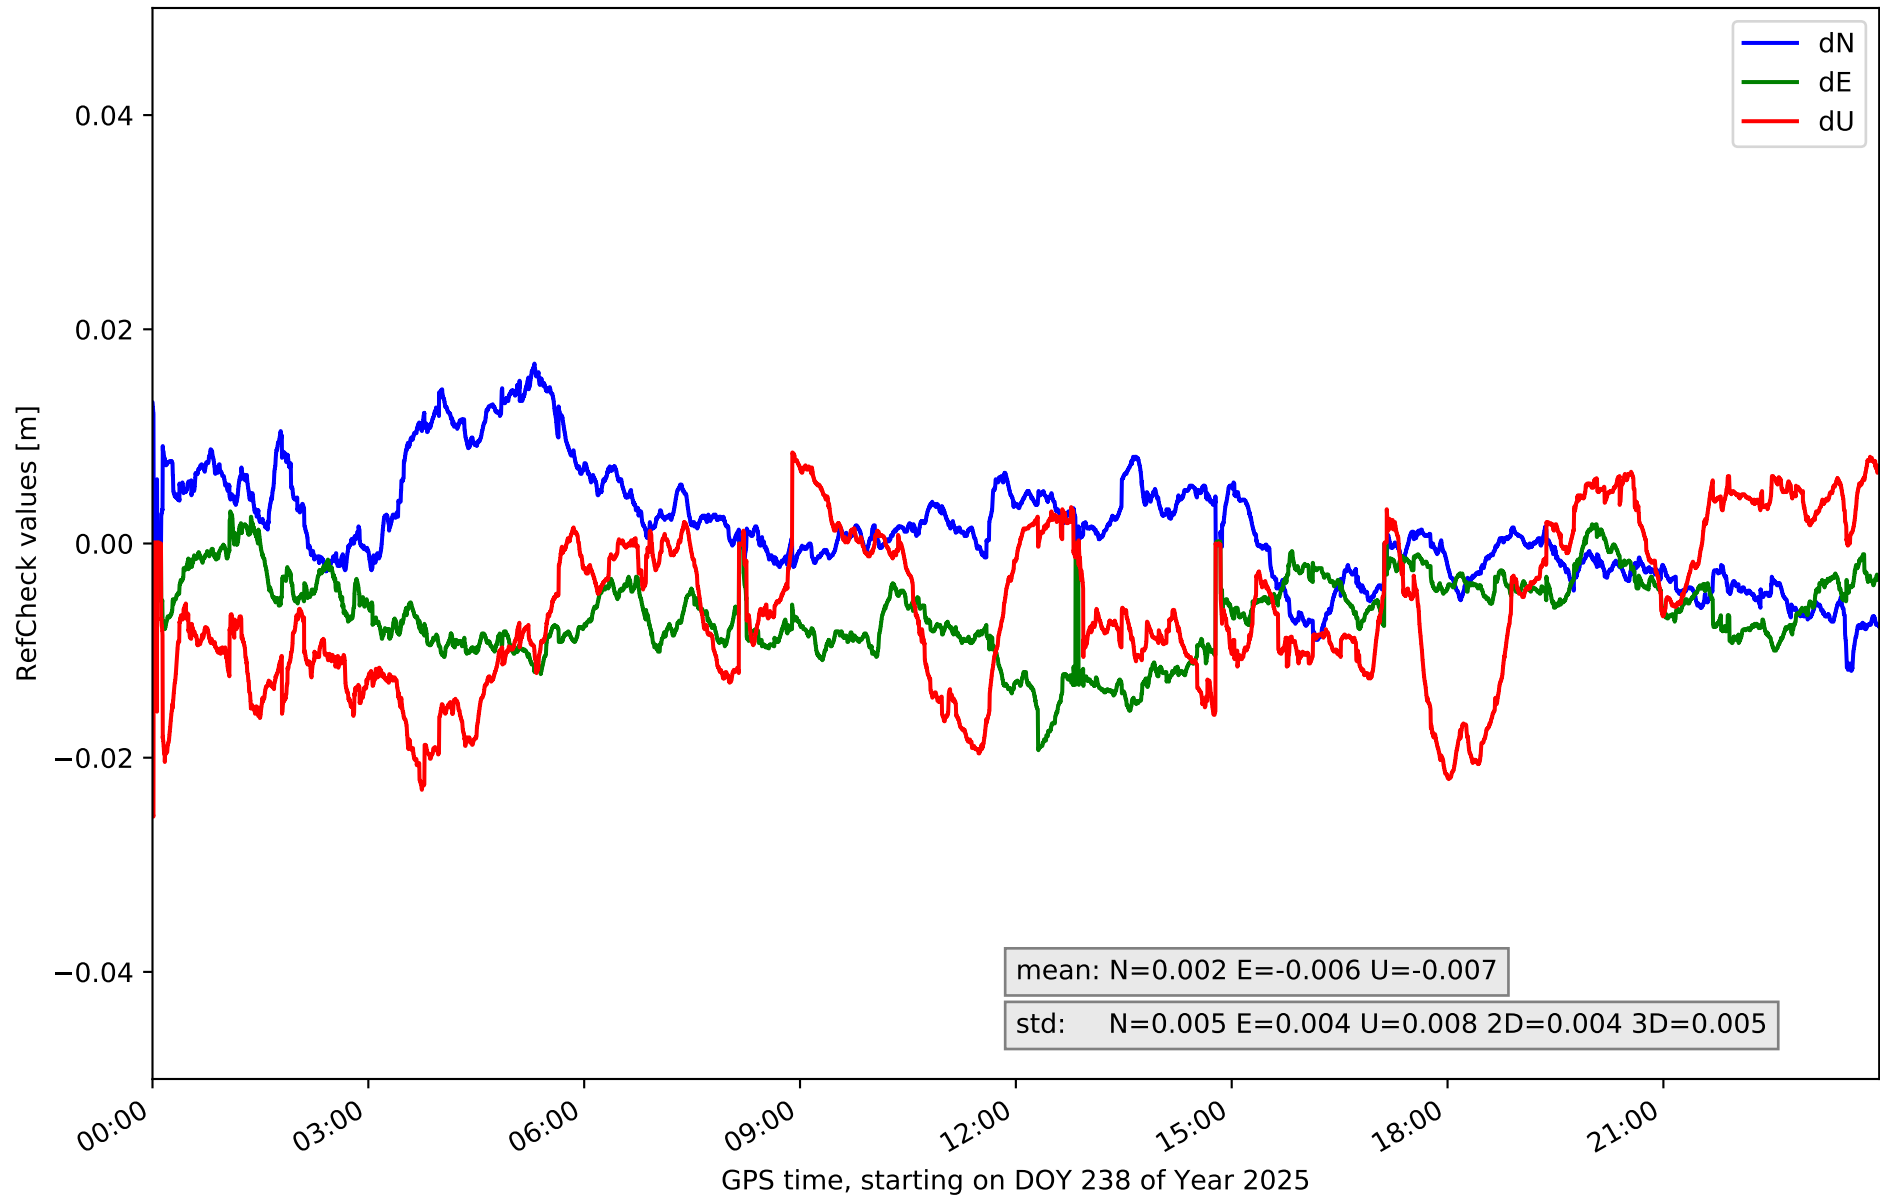


RefCheck for station LP01 in network N32T

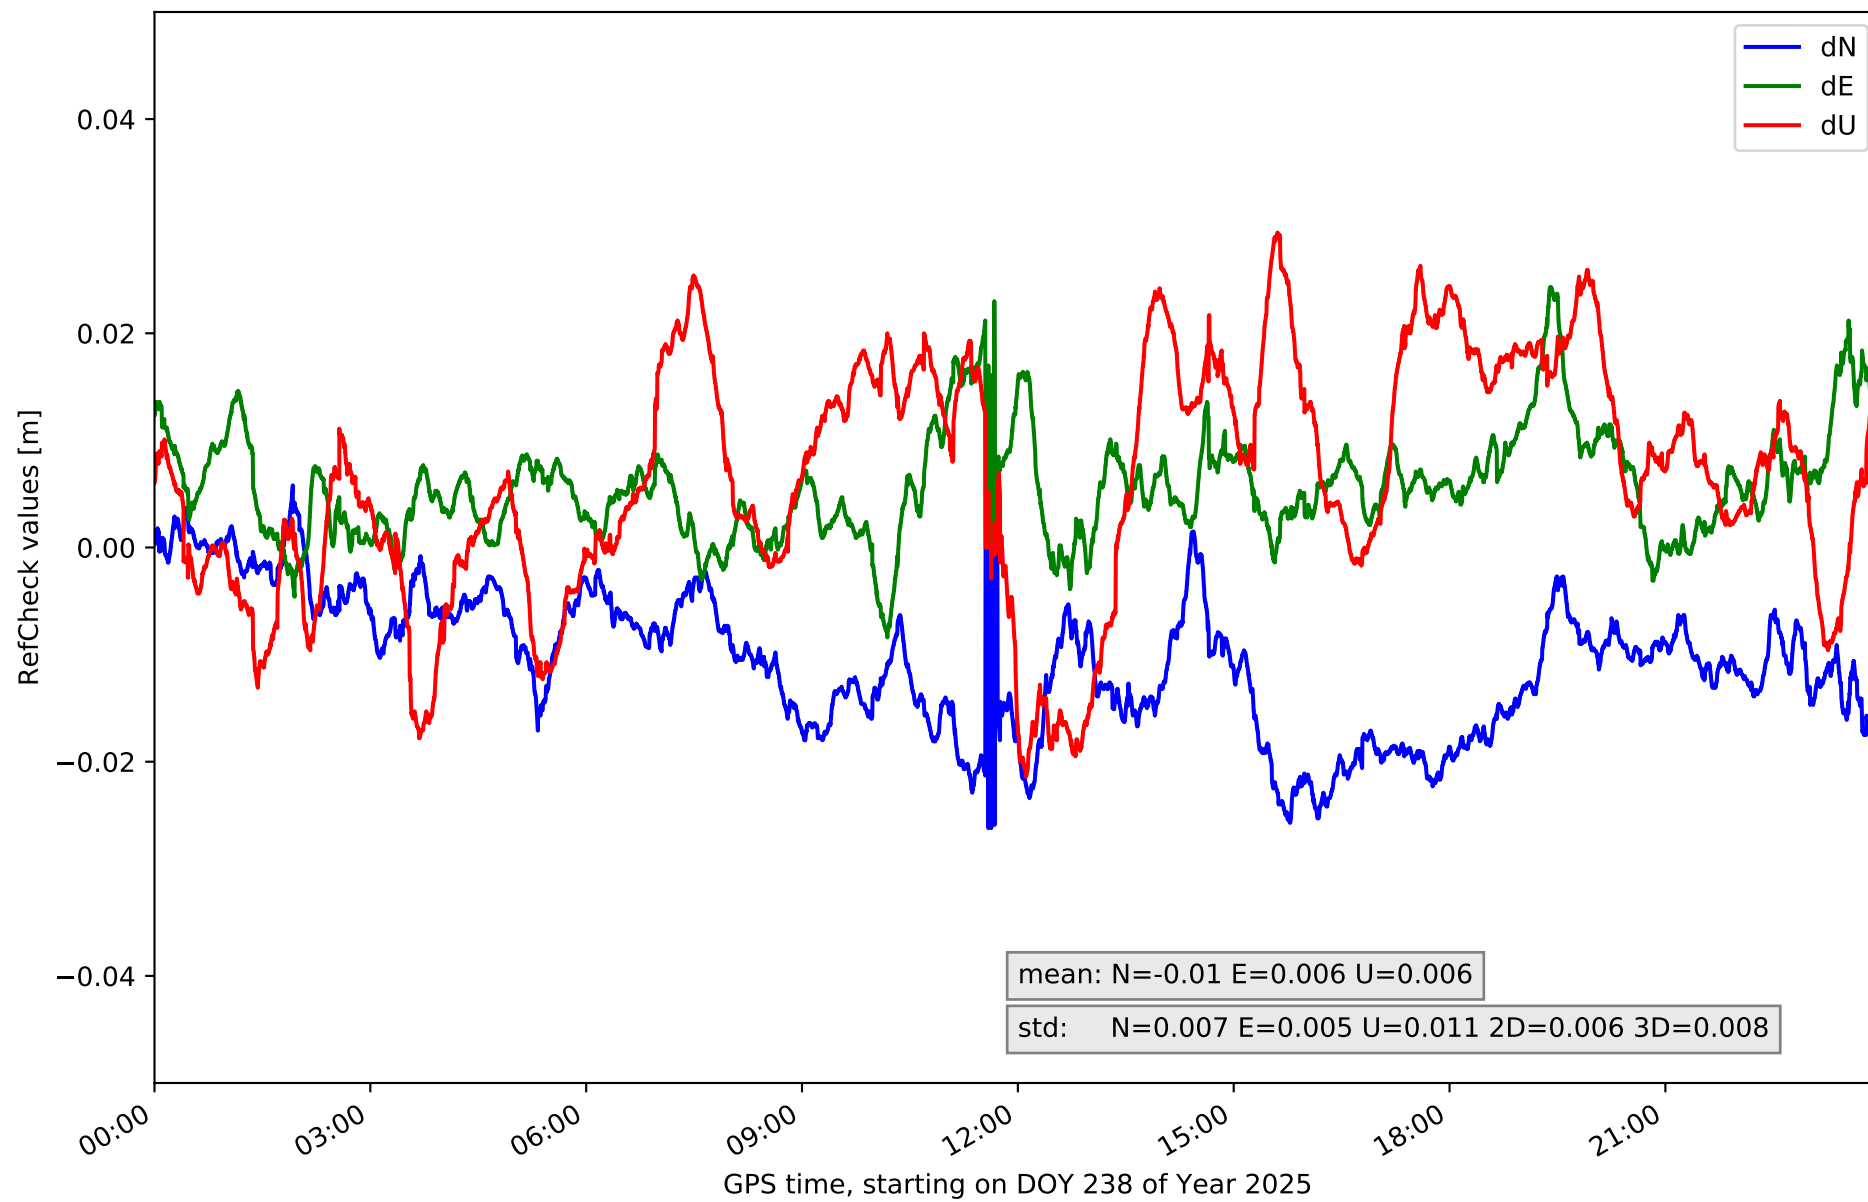


RefCheck for station LP03 in network N32T

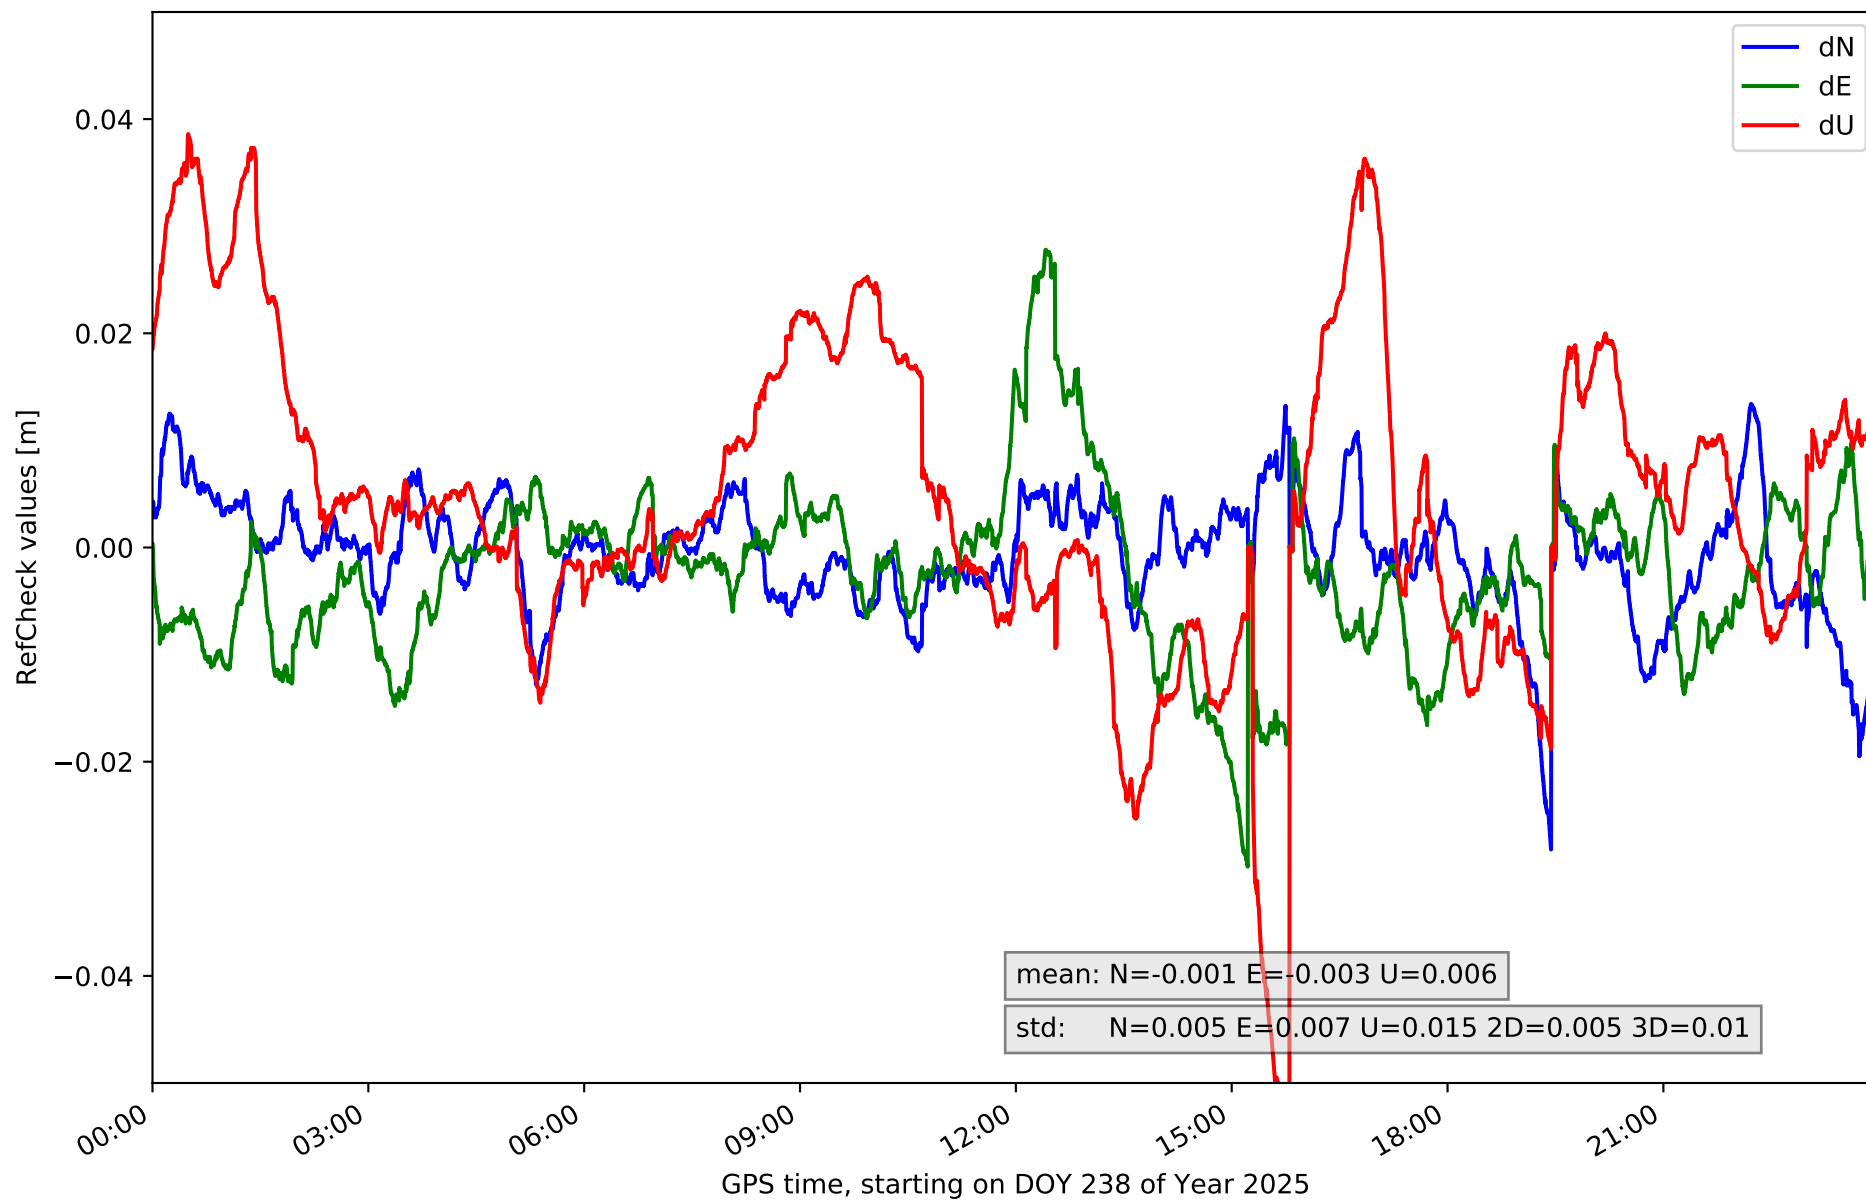


RefCheck for station LPAL in network N32T

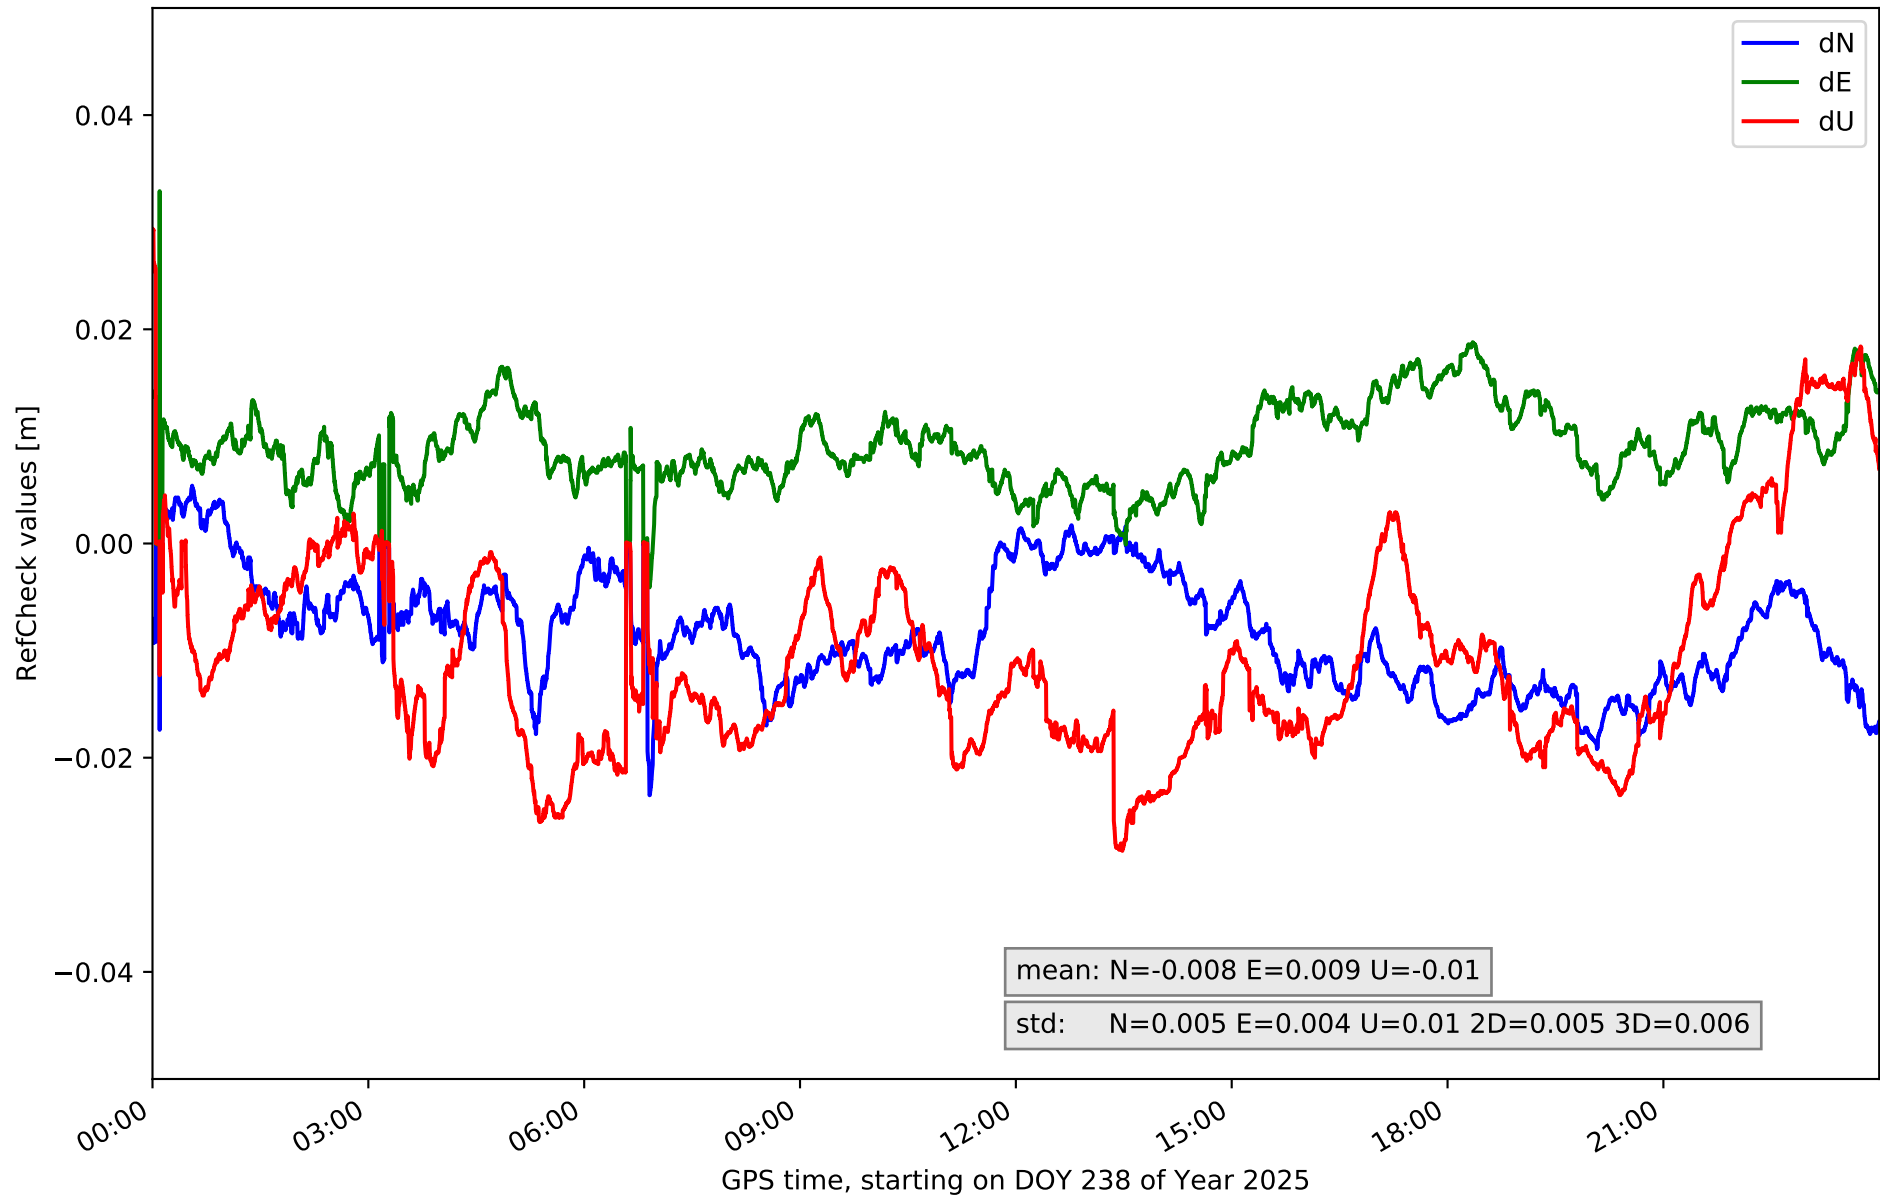


RefCheck for station LRES in network N32T

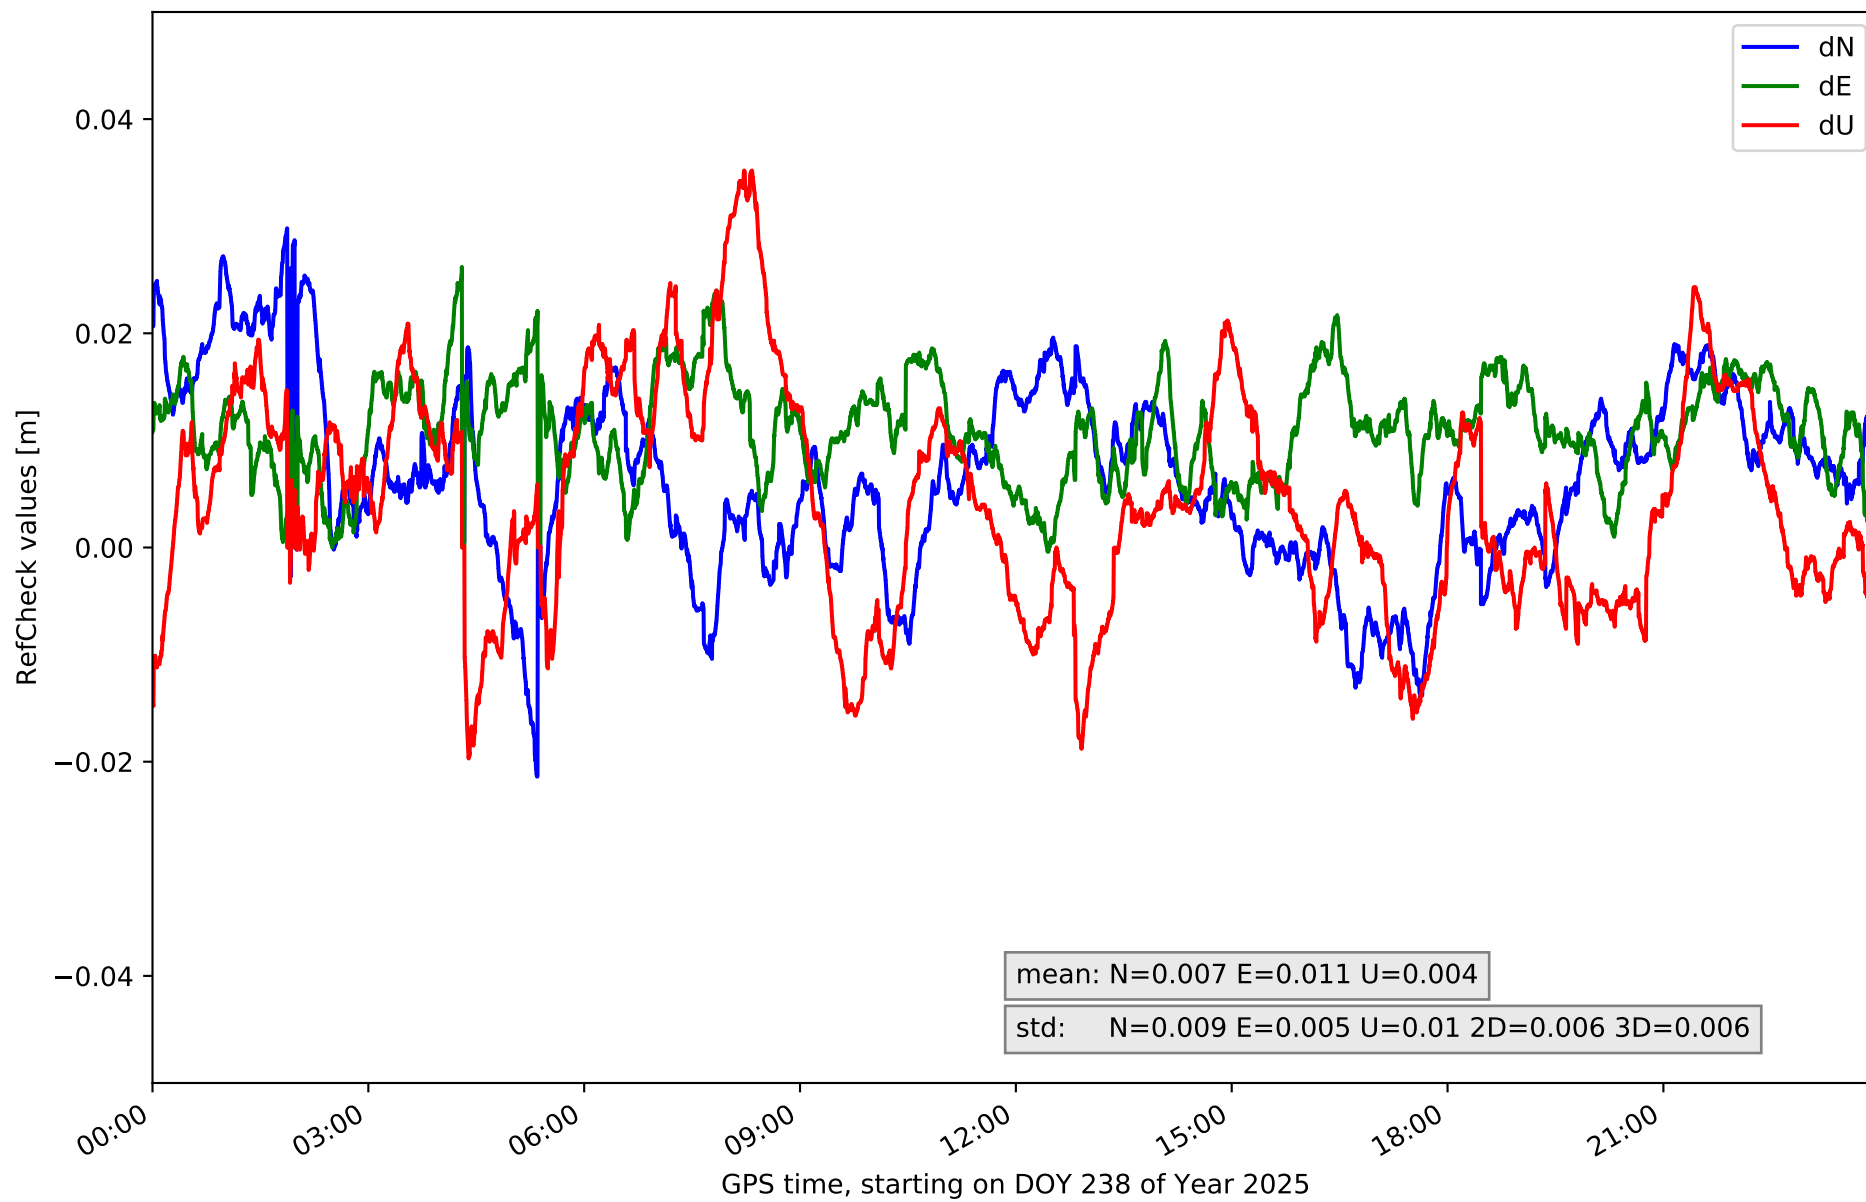


RefCheck for station TN01 in network N32T

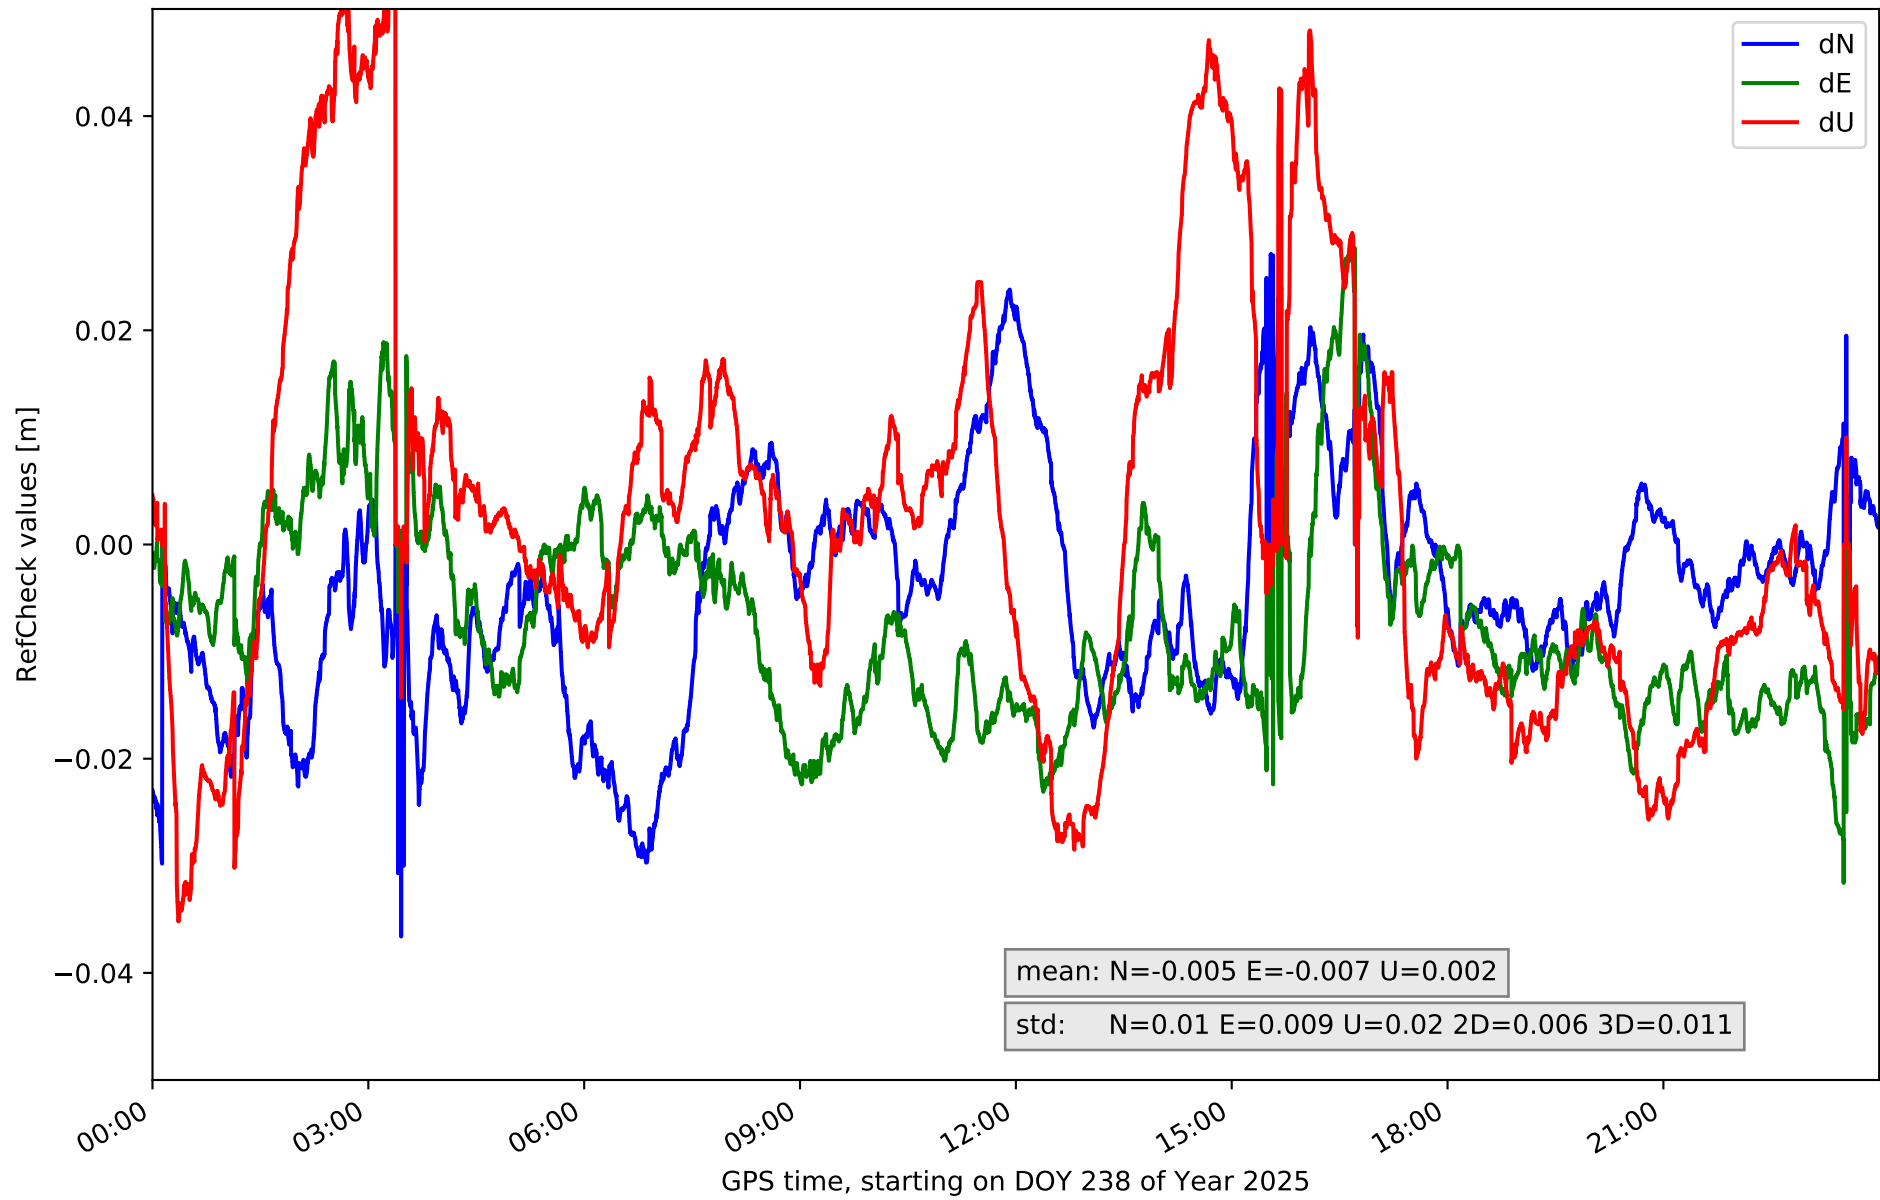


RefCheck for station TN02 in network N32T

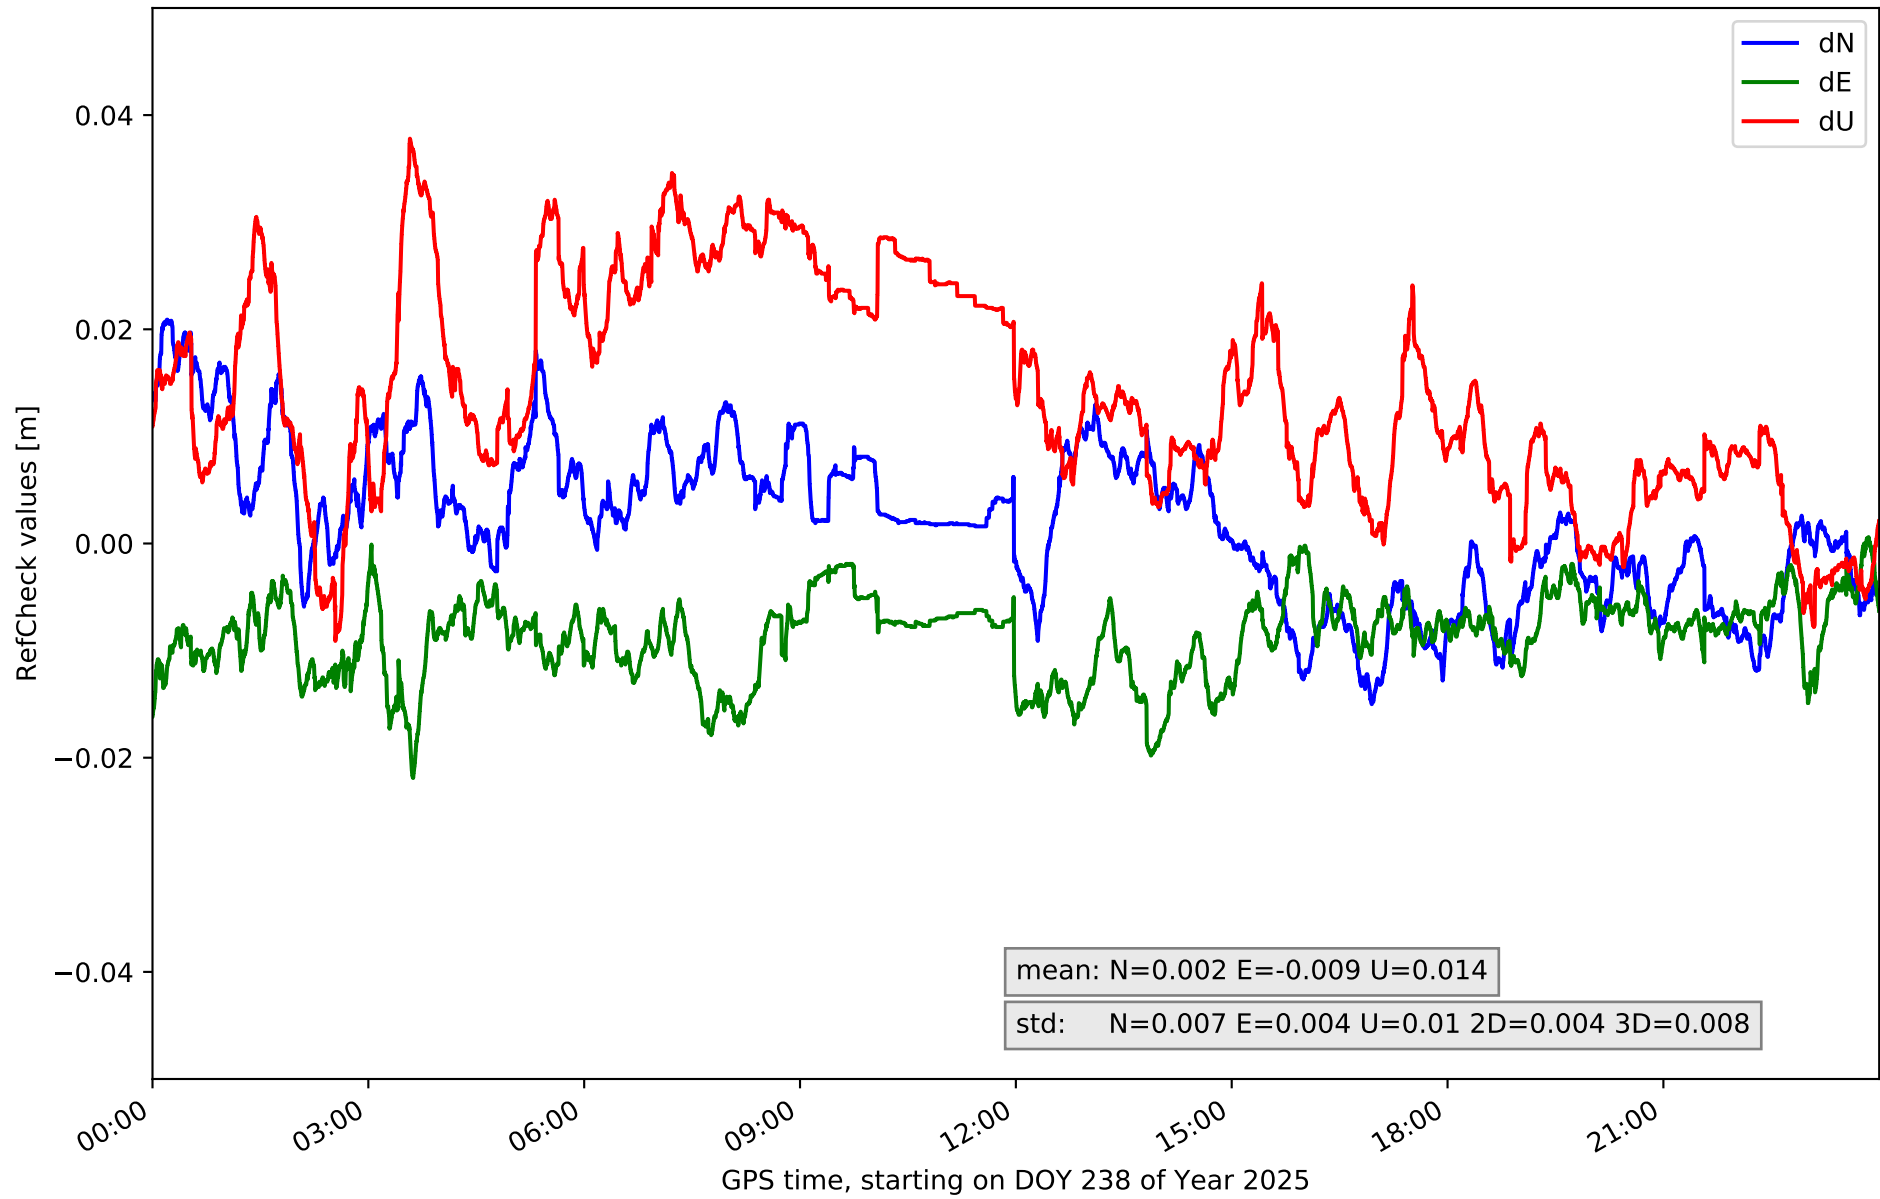


RefCheck for station TN03 in network N32T

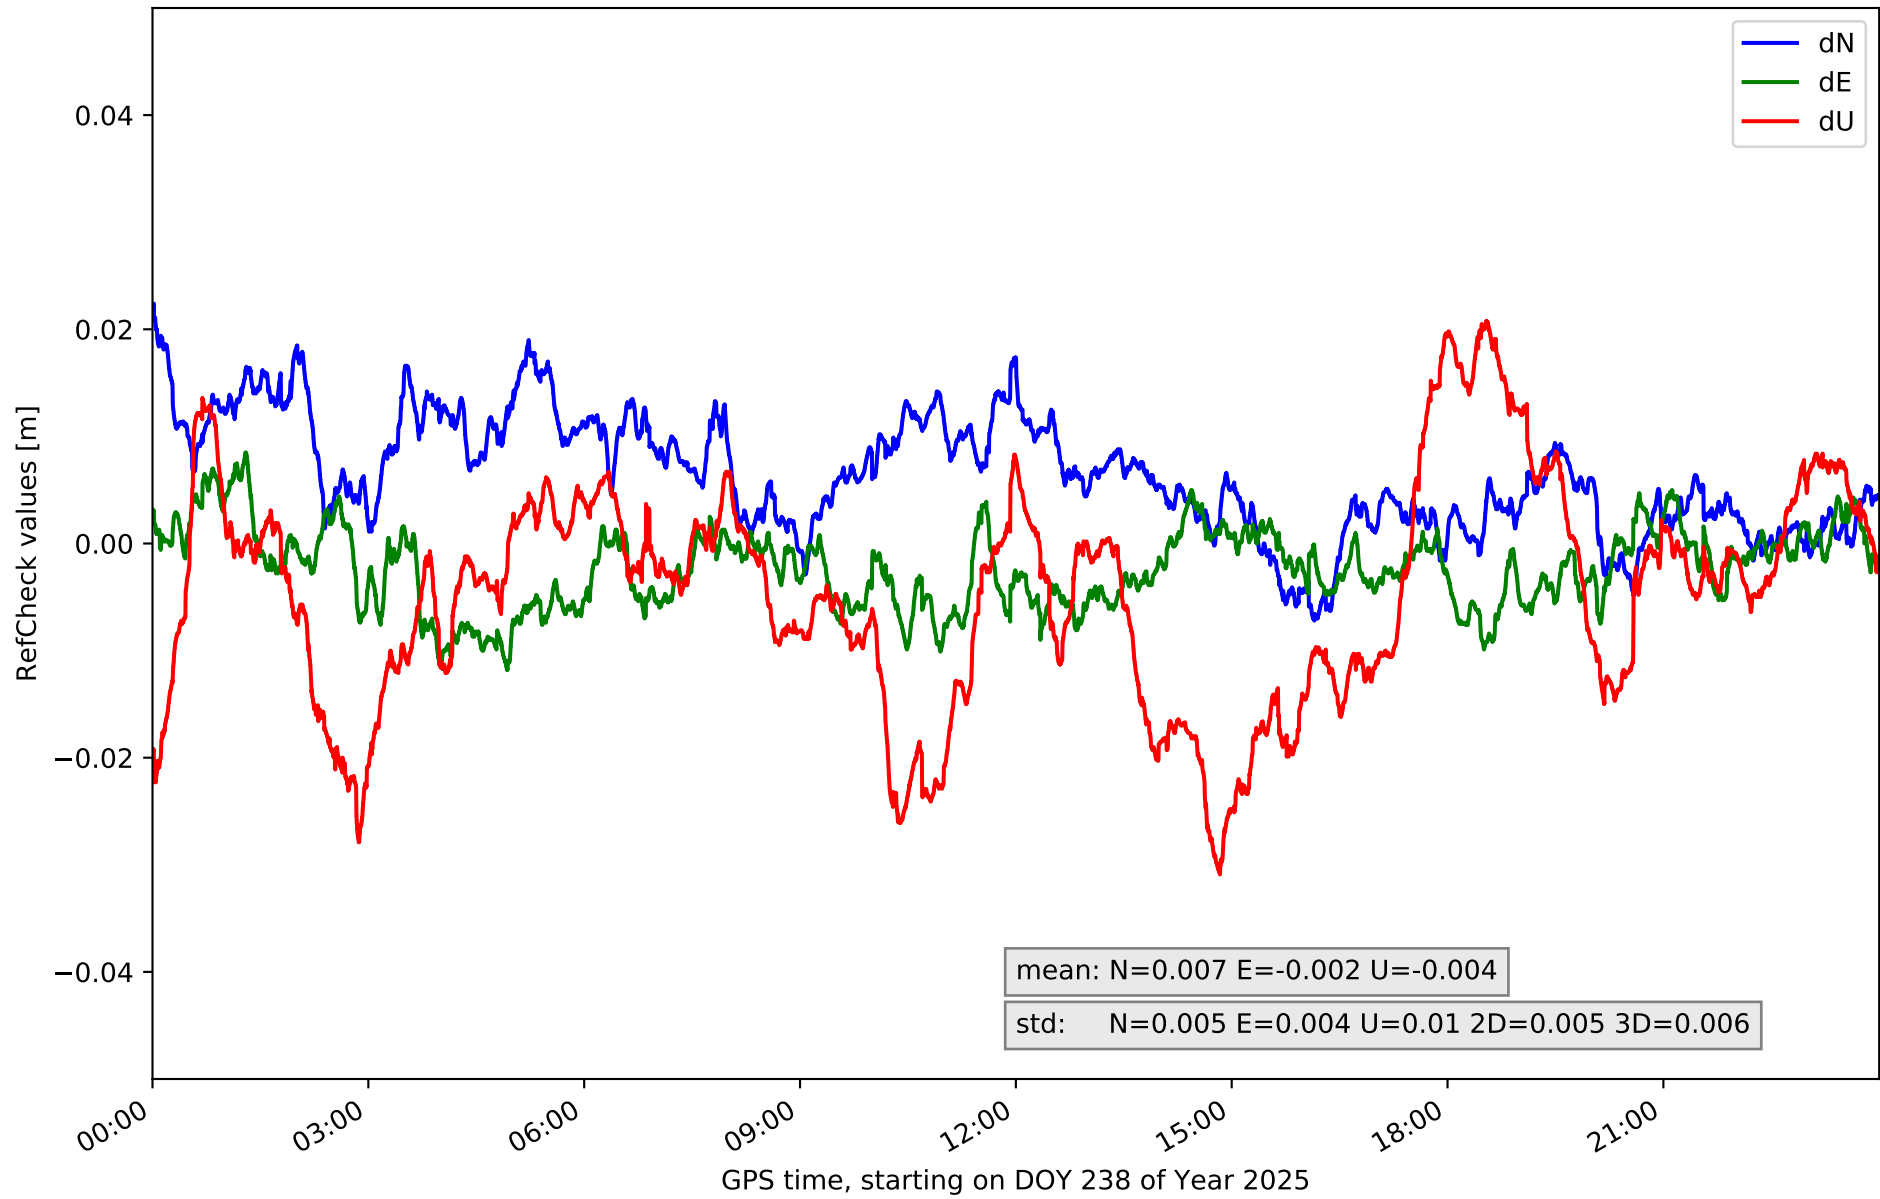


RefCheck for station TN04 in network N32T

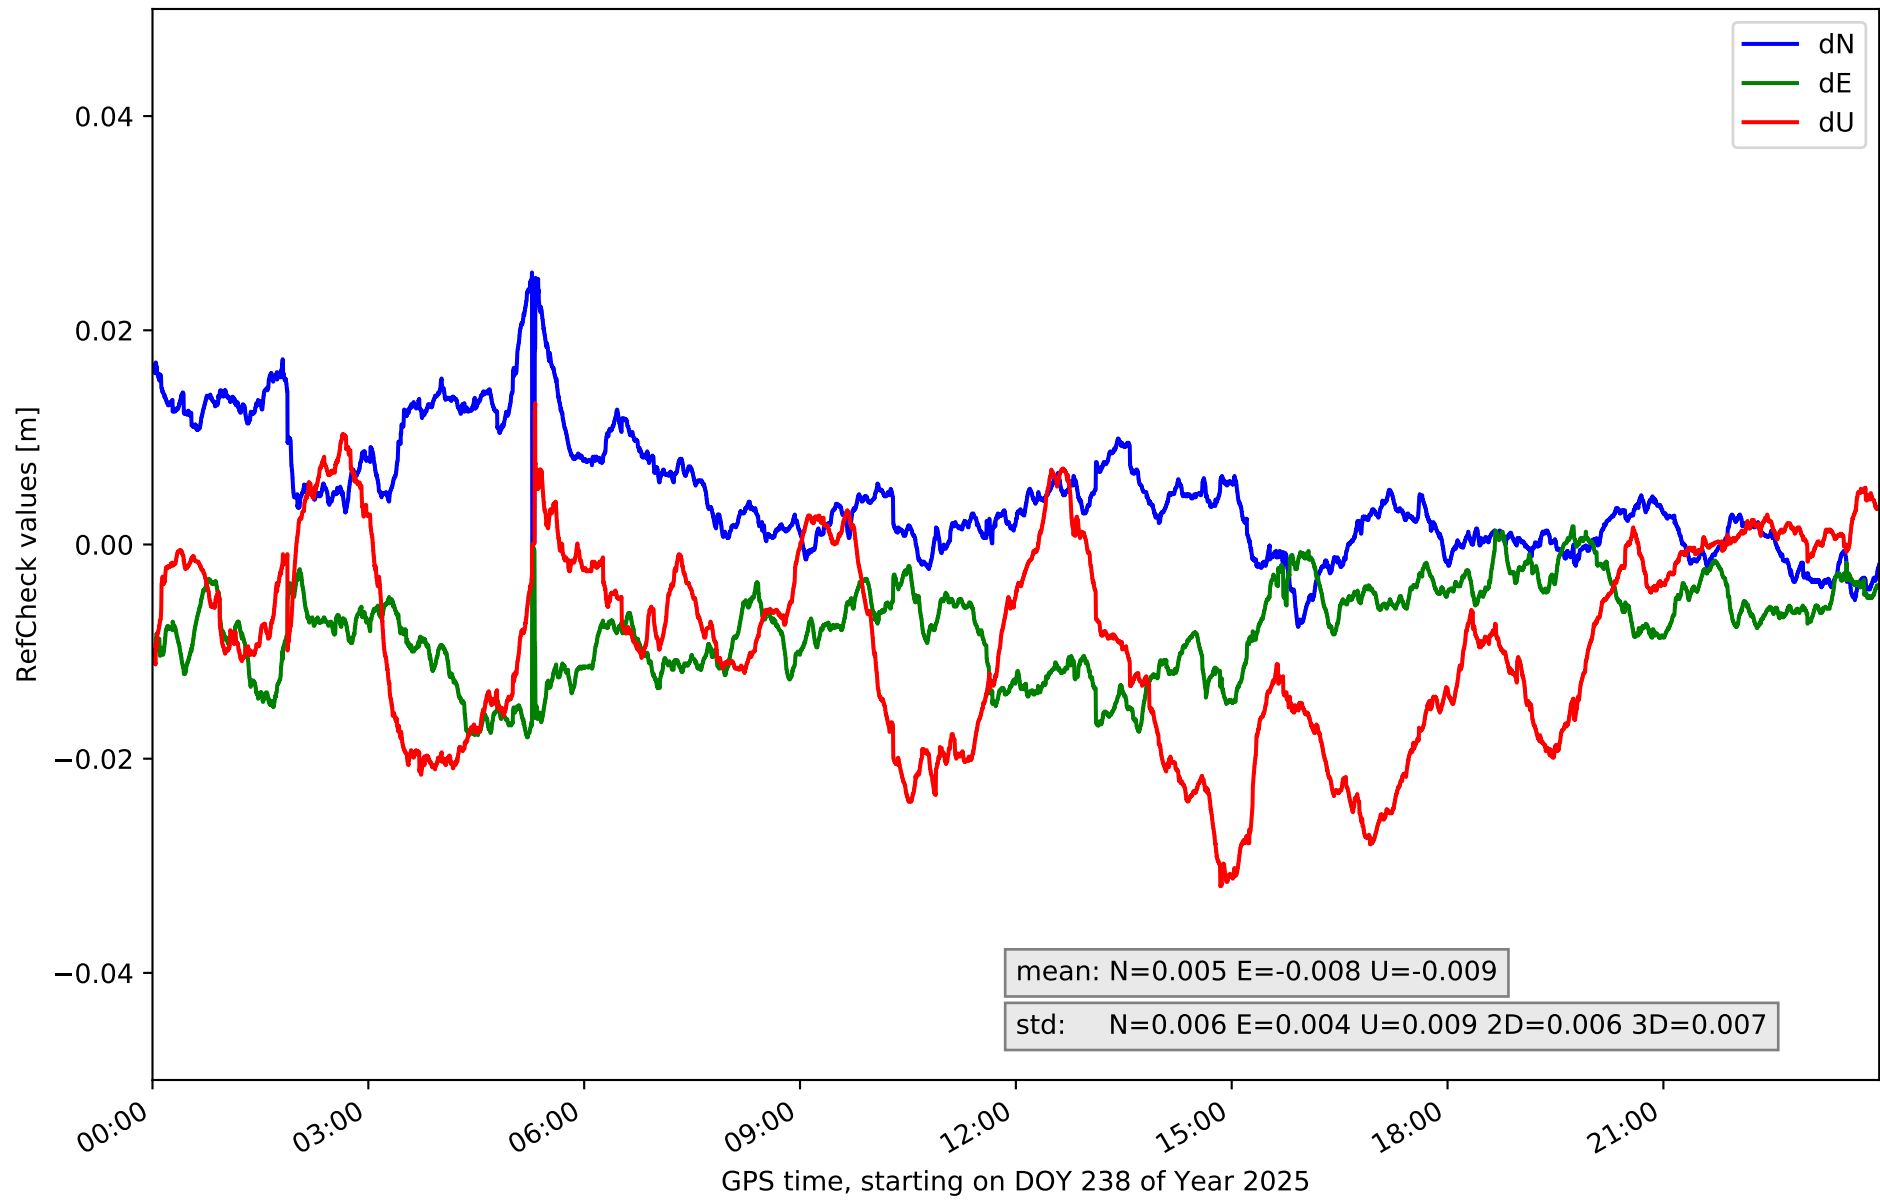


RefCheck for station TN06 in network N32T

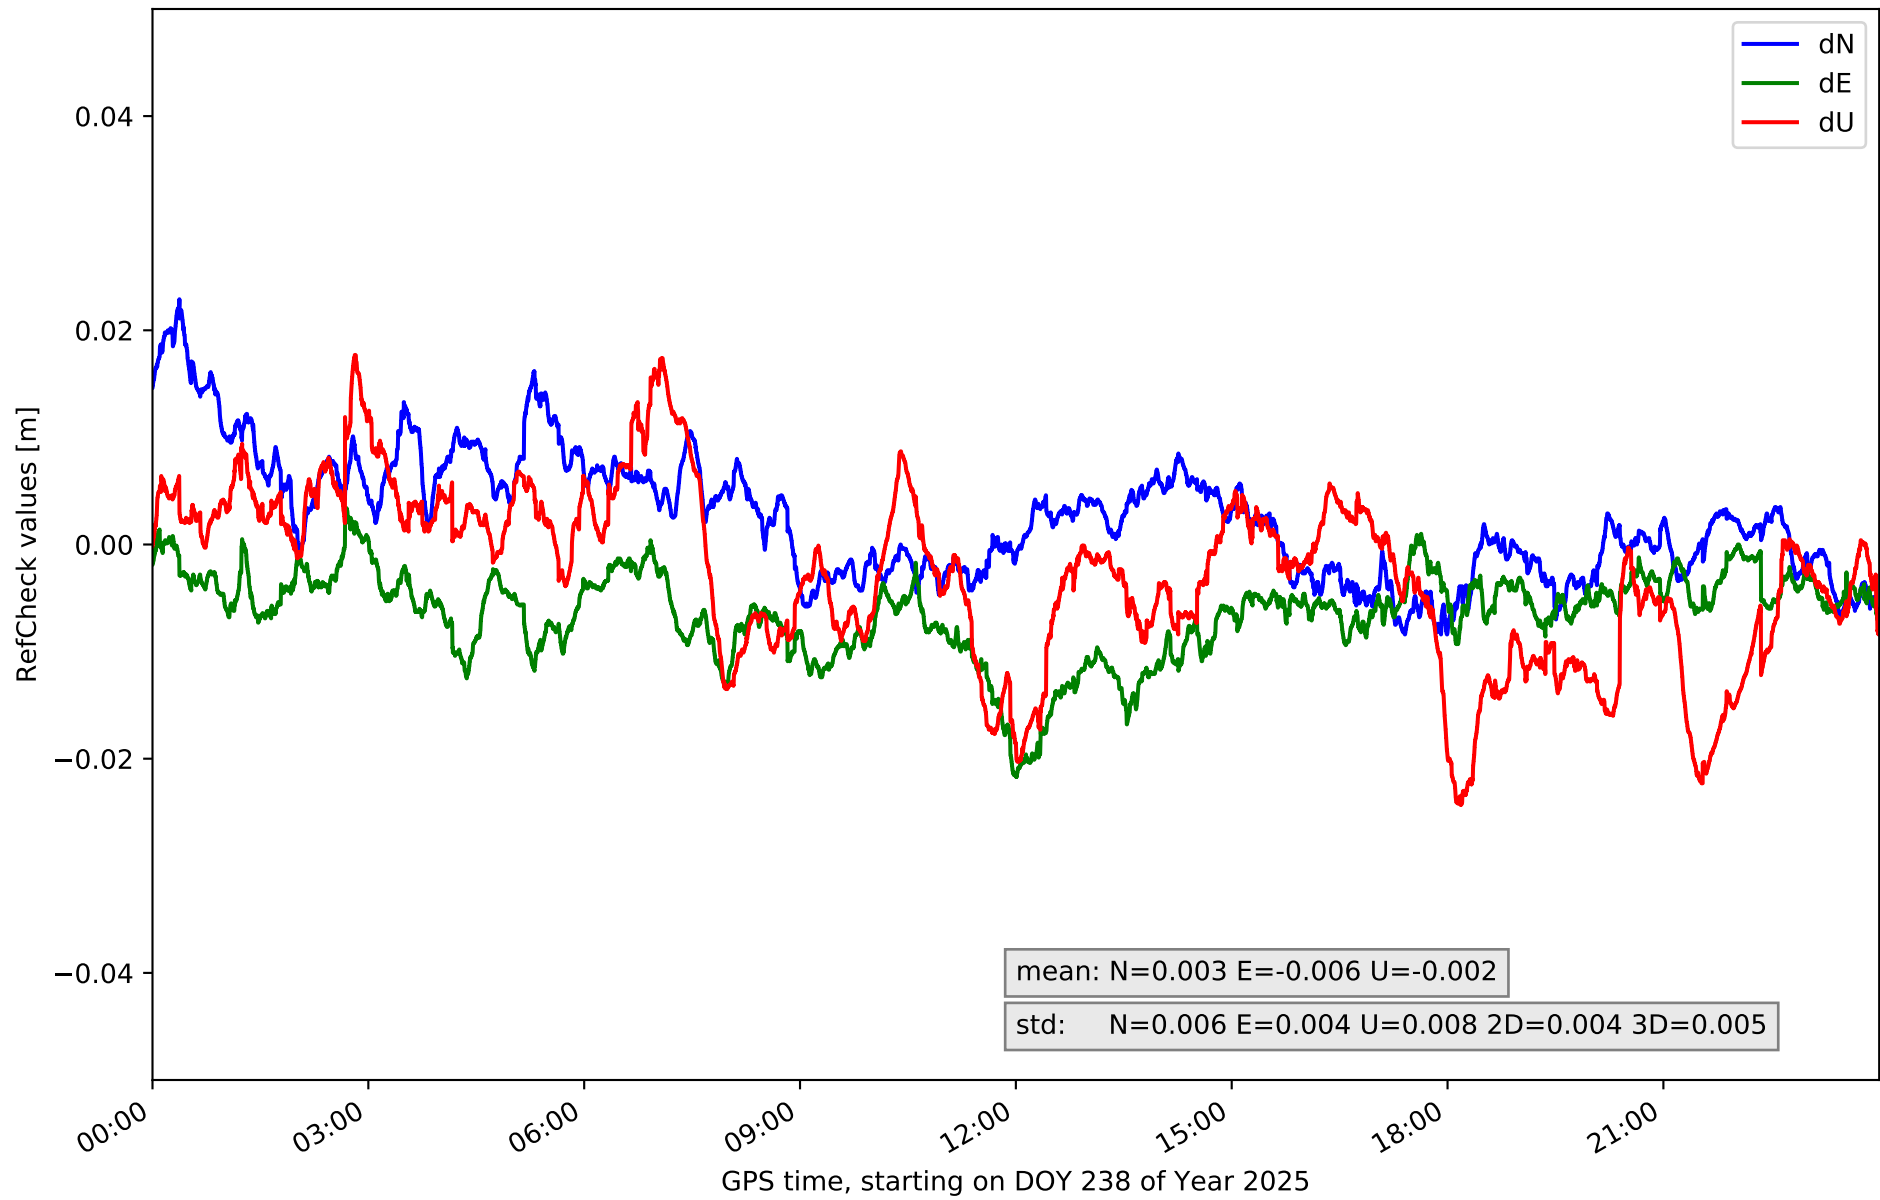

RefCheck for station TN09 in network N32T

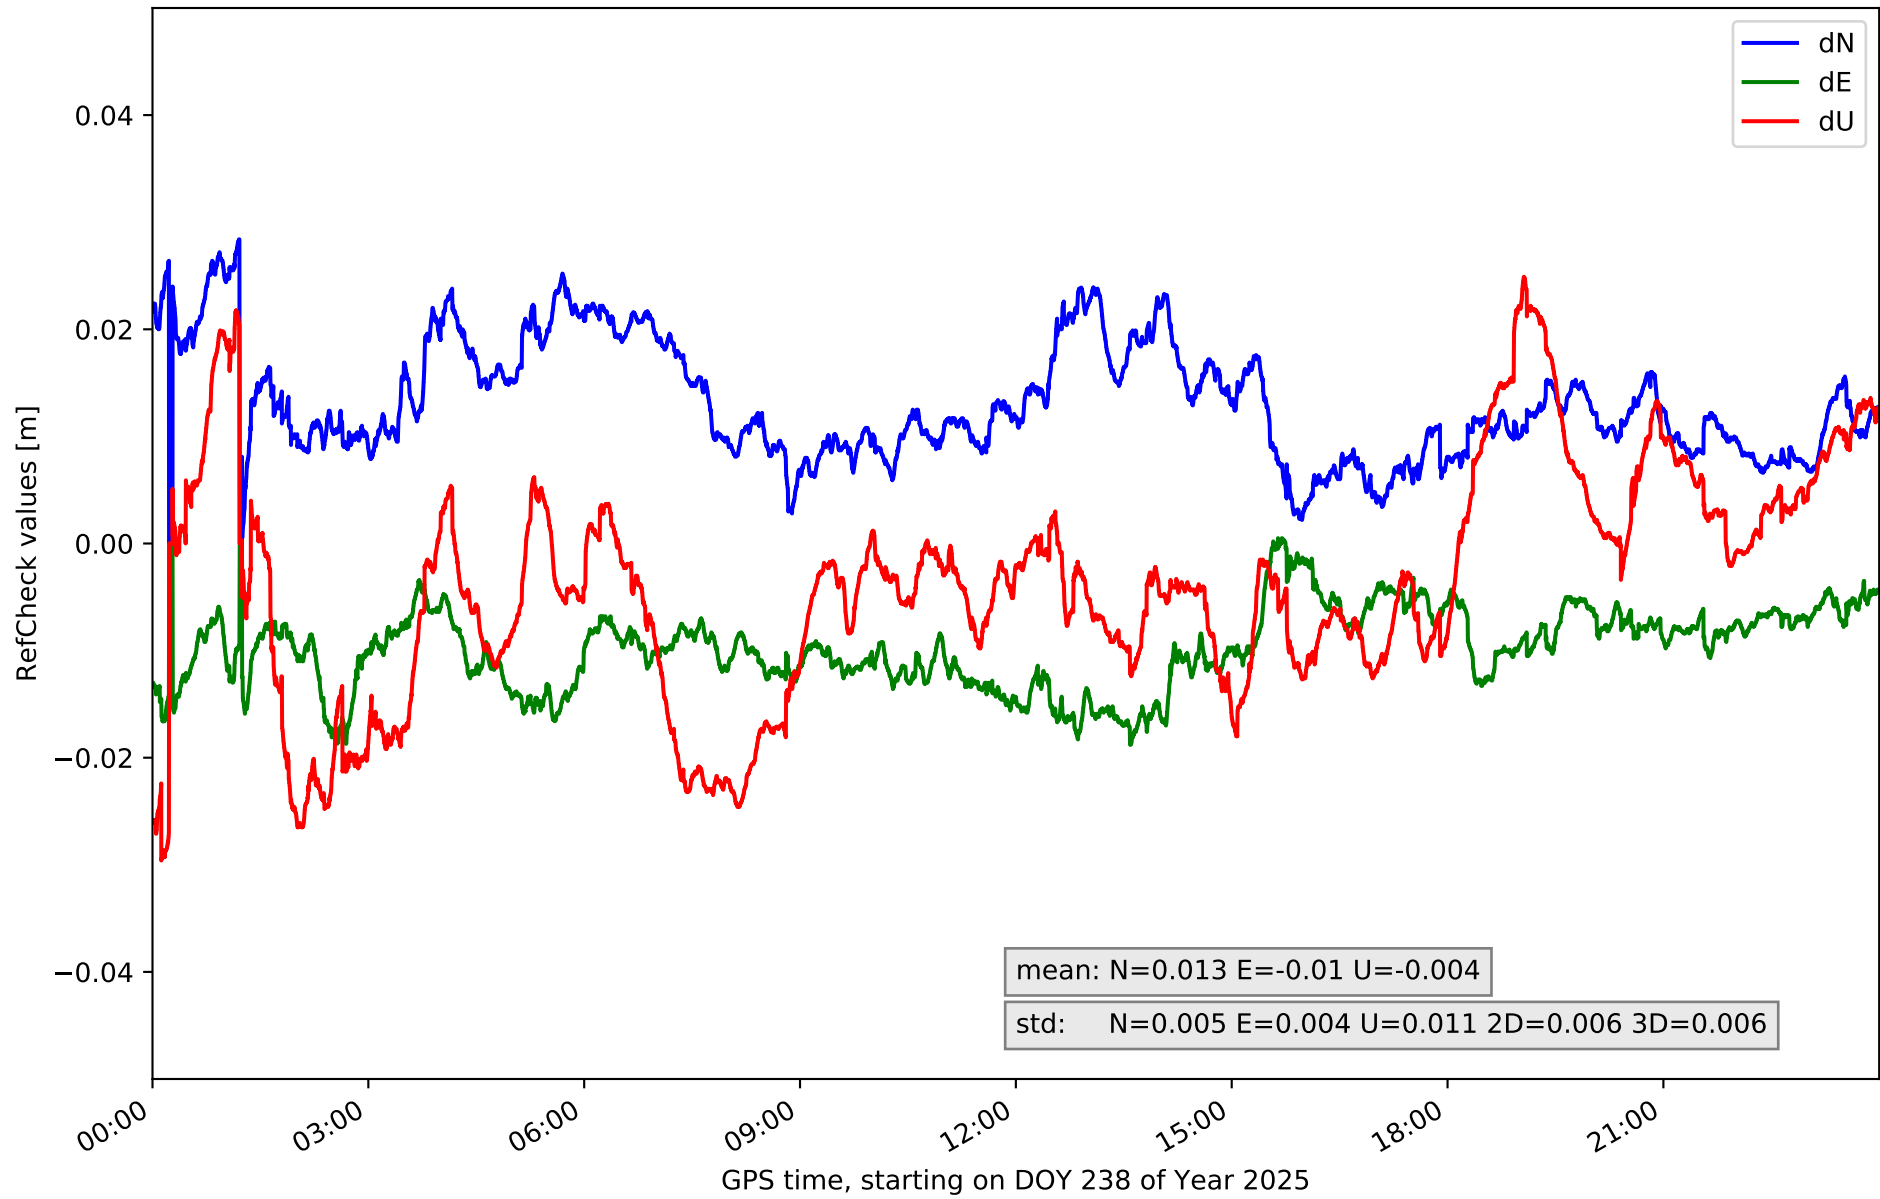

RefCheck for station TE11 in network N32T

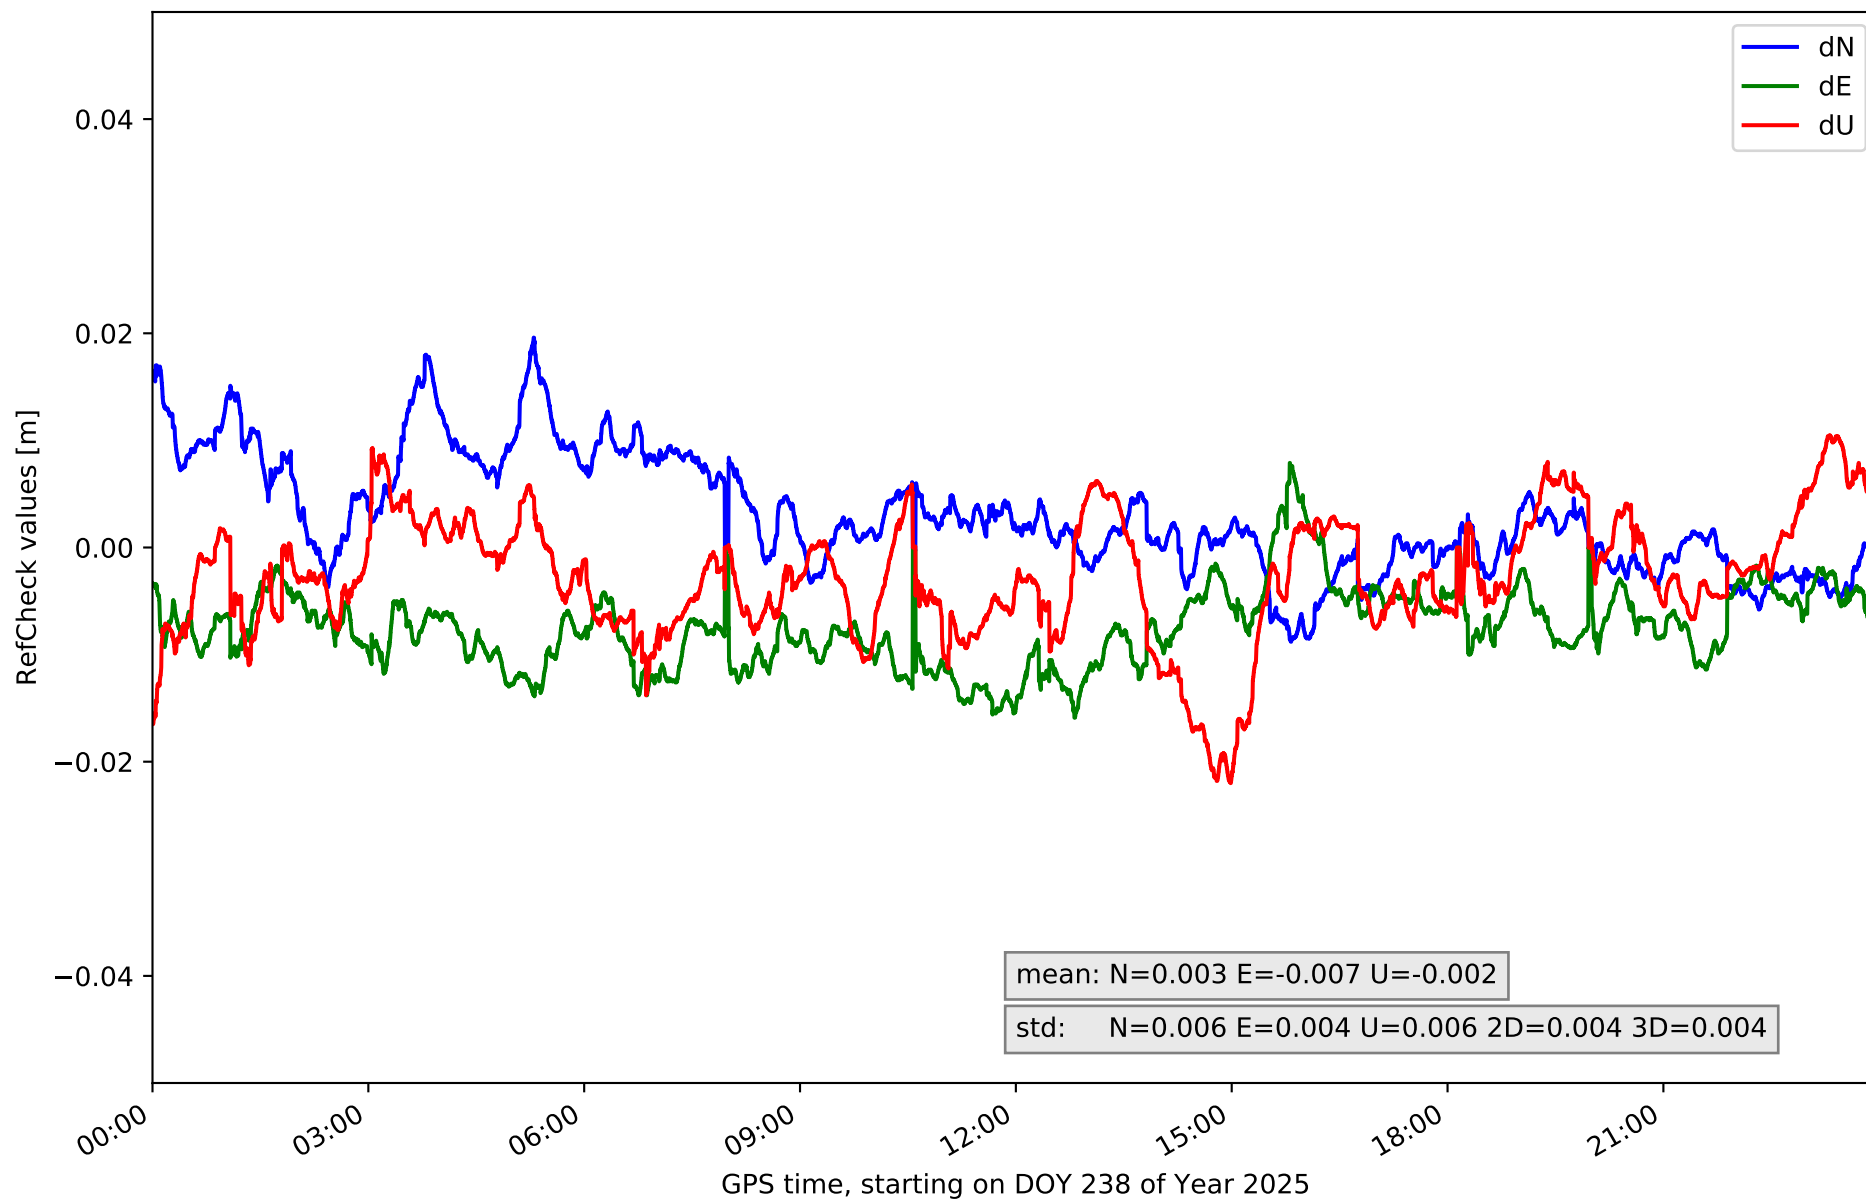

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.015	0.021	0.006	-0.007	0.029	0.007	-0.06	0.017	0.014	0.005	0.009	45083	89.7	27040	53.8
EH02	-0.007	0.026	0.007	-0.003	0.03	0.006	-0.031	0.045	0.015	0.005	0.009	48987	97.5	30576	60.8
GOM1	-0.015	0.013	0.005	-0.028	0.009	0.007	-0.039	0.032	0.014	0.006	0.008	26600	52.9	25656	51.1
IZAN	-0.012	0.017	0.005	-0.019	0.003	0.004	-0.025	0.009	0.008	0.004	0.005	13187	26.2	5355	10.7
LP01	-0.026	0.006	0.007	-0.008	0.024	0.005	-0.021	0.029	0.011	0.006	0.008	30950	61.6	18446	36.7
LP03	-0.028	0.013	0.005	-0.03	0.028	0.007	-0.06	0.039	0.015	0.005	0.01	15435	30.7	13206	26.3
LPAL	-0.024	0.005	0.005	-0.004	0.033	0.004	-0.029	0.029	0.01	0.005	0.006	34989	69.6	21295	42.4
LRES	-0.021	0.03	0.009	-0.0	0.026	0.005	-0.02	0.035	0.01	0.006	0.006	43400	86.4	18180	36.2
TN01	-0.037	0.027	0.01	-0.032	0.028	0.009	-0.035	0.06	0.02	0.006	0.011	39949	79.5	26353	52.4
TN02	-0.015	0.021	0.007	-0.022	0.001	0.004	-0.009	0.038	0.01	0.004	0.008	29114	57.9	21690	43.2
TN03	-0.007	0.022	0.005	-0.012	0.009	0.004	-0.031	0.021	0.01	0.005	0.006	18868	37.5	6074	12.1
TN04	-0.008	0.025	0.006	-0.018	0.002	0.004	-0.032	0.013	0.009	0.006	0.007	22518	44.8	14156	28.2
TN06	-0.008	0.023	0.006	-0.022	0.003	0.004	-0.024	0.018	0.008	0.004	0.005	17006	33.8	3703	7.4
TN09	-0.0	0.028	0.005	-0.019	0.001	0.004	-0.03	0.025	0.011	0.006	0.006	45026	89.6	25925	51.6
TE11	-0.009	0.02	0.006	-0.016	0.008	0.004	-0.022	0.011	0.006	0.004	0.004	22655	45.1	1289	2.6
Mean	-0.015	0.02	0.006	-0.016	0.016	0.005	-0.031	0.028	0.011	0.005	0.007	30251.1	60.2	17262.9	34.4
Min/Max	-0.037	0.03	0.01	-0.032	0.033	0.009	-0.06	0.06	0.02	0.006	0.011	48987	97.5	30576	60.8

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	91.9	92.5	92.1	94.1	89.2
considering satellites with dual-frequency fixed	89.5	89.6	87.8	92.1	87.3
considering all signals separately	89.4	89.1	87.8	92.4	85.2