

summary for network NT32

timeperiod chosen: from 2025-08-31-00:00:00 until 2025-08-31-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.1 seconds


average fixing percentage with threshold set to 0.3: 92.3 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021

Processing rate in network NT32

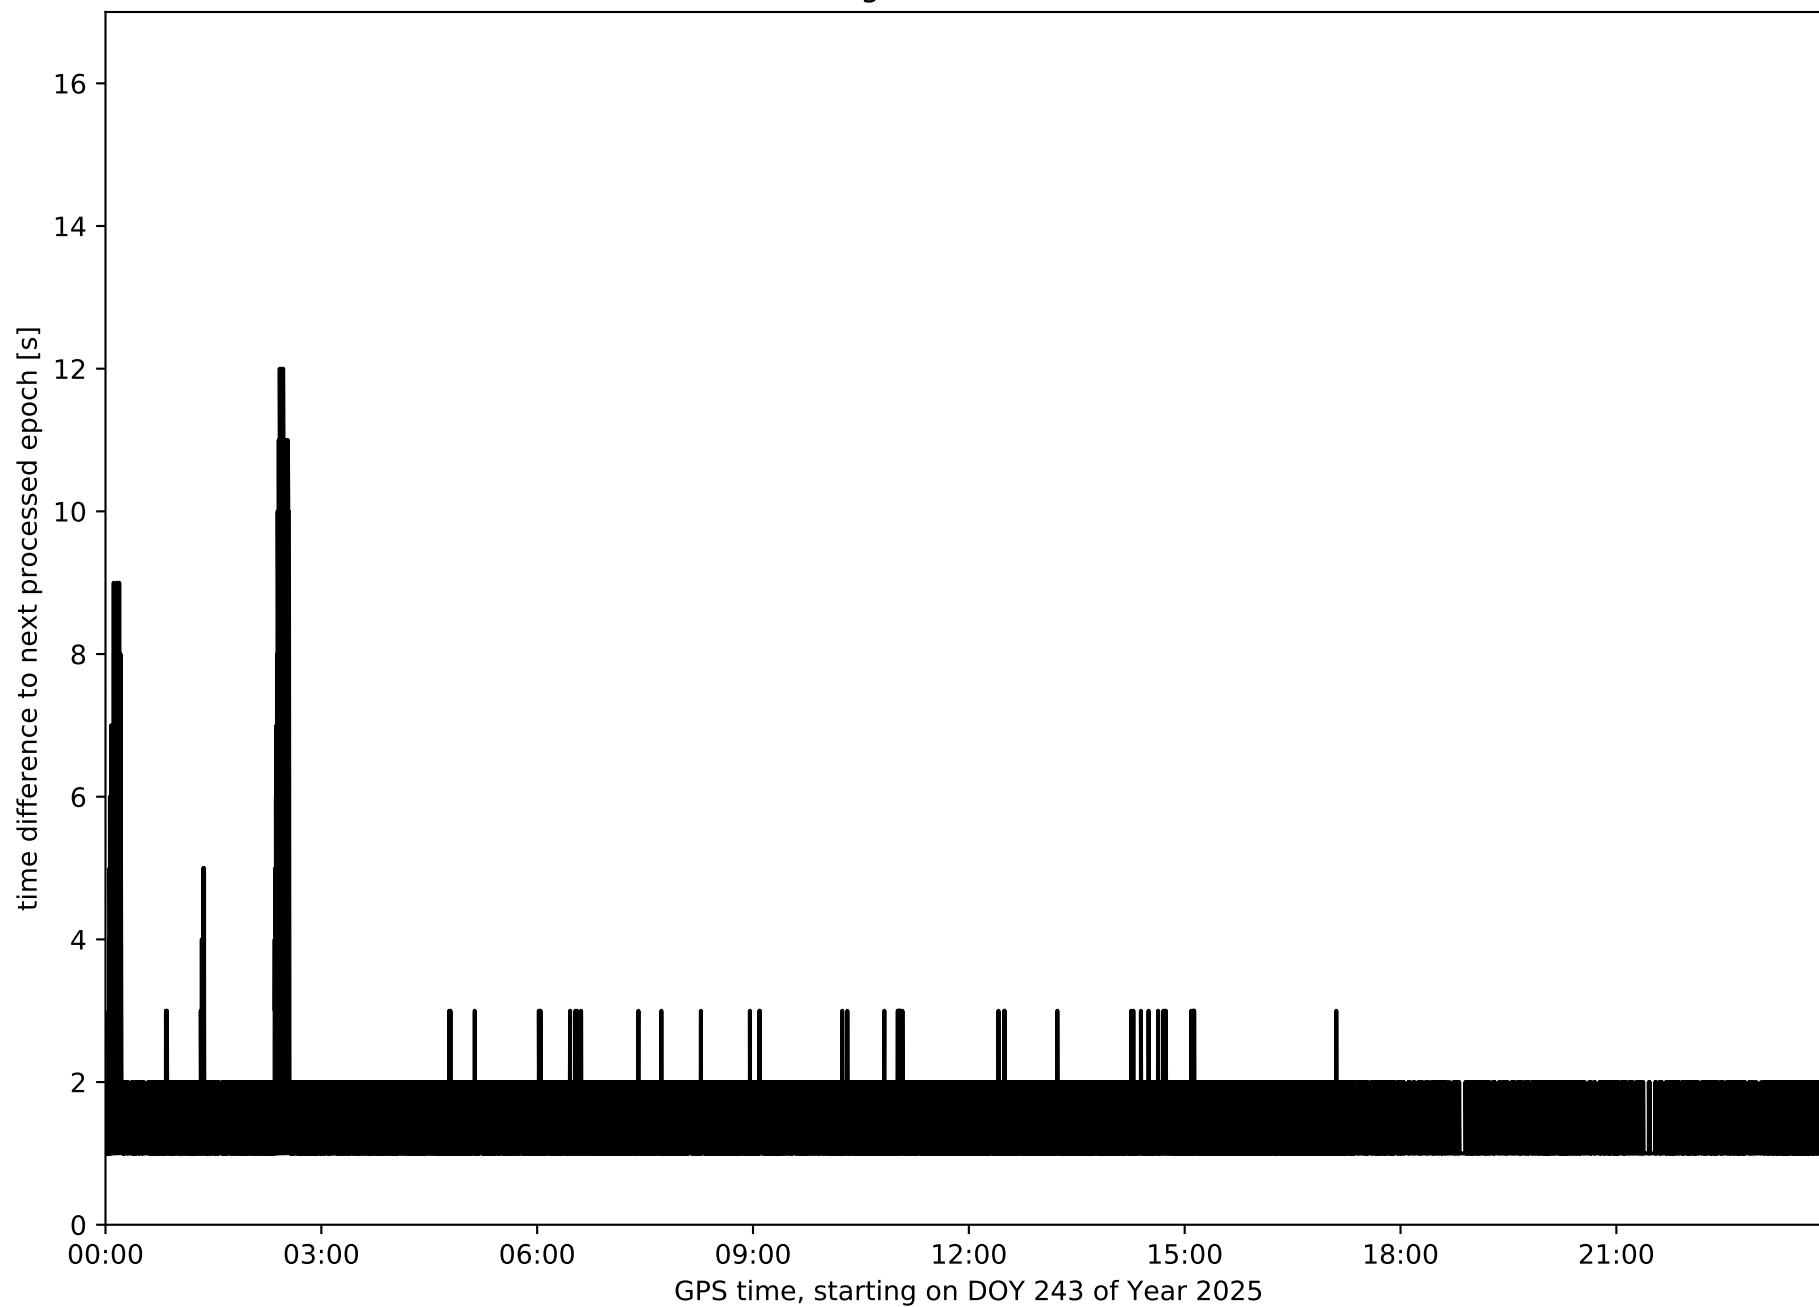


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

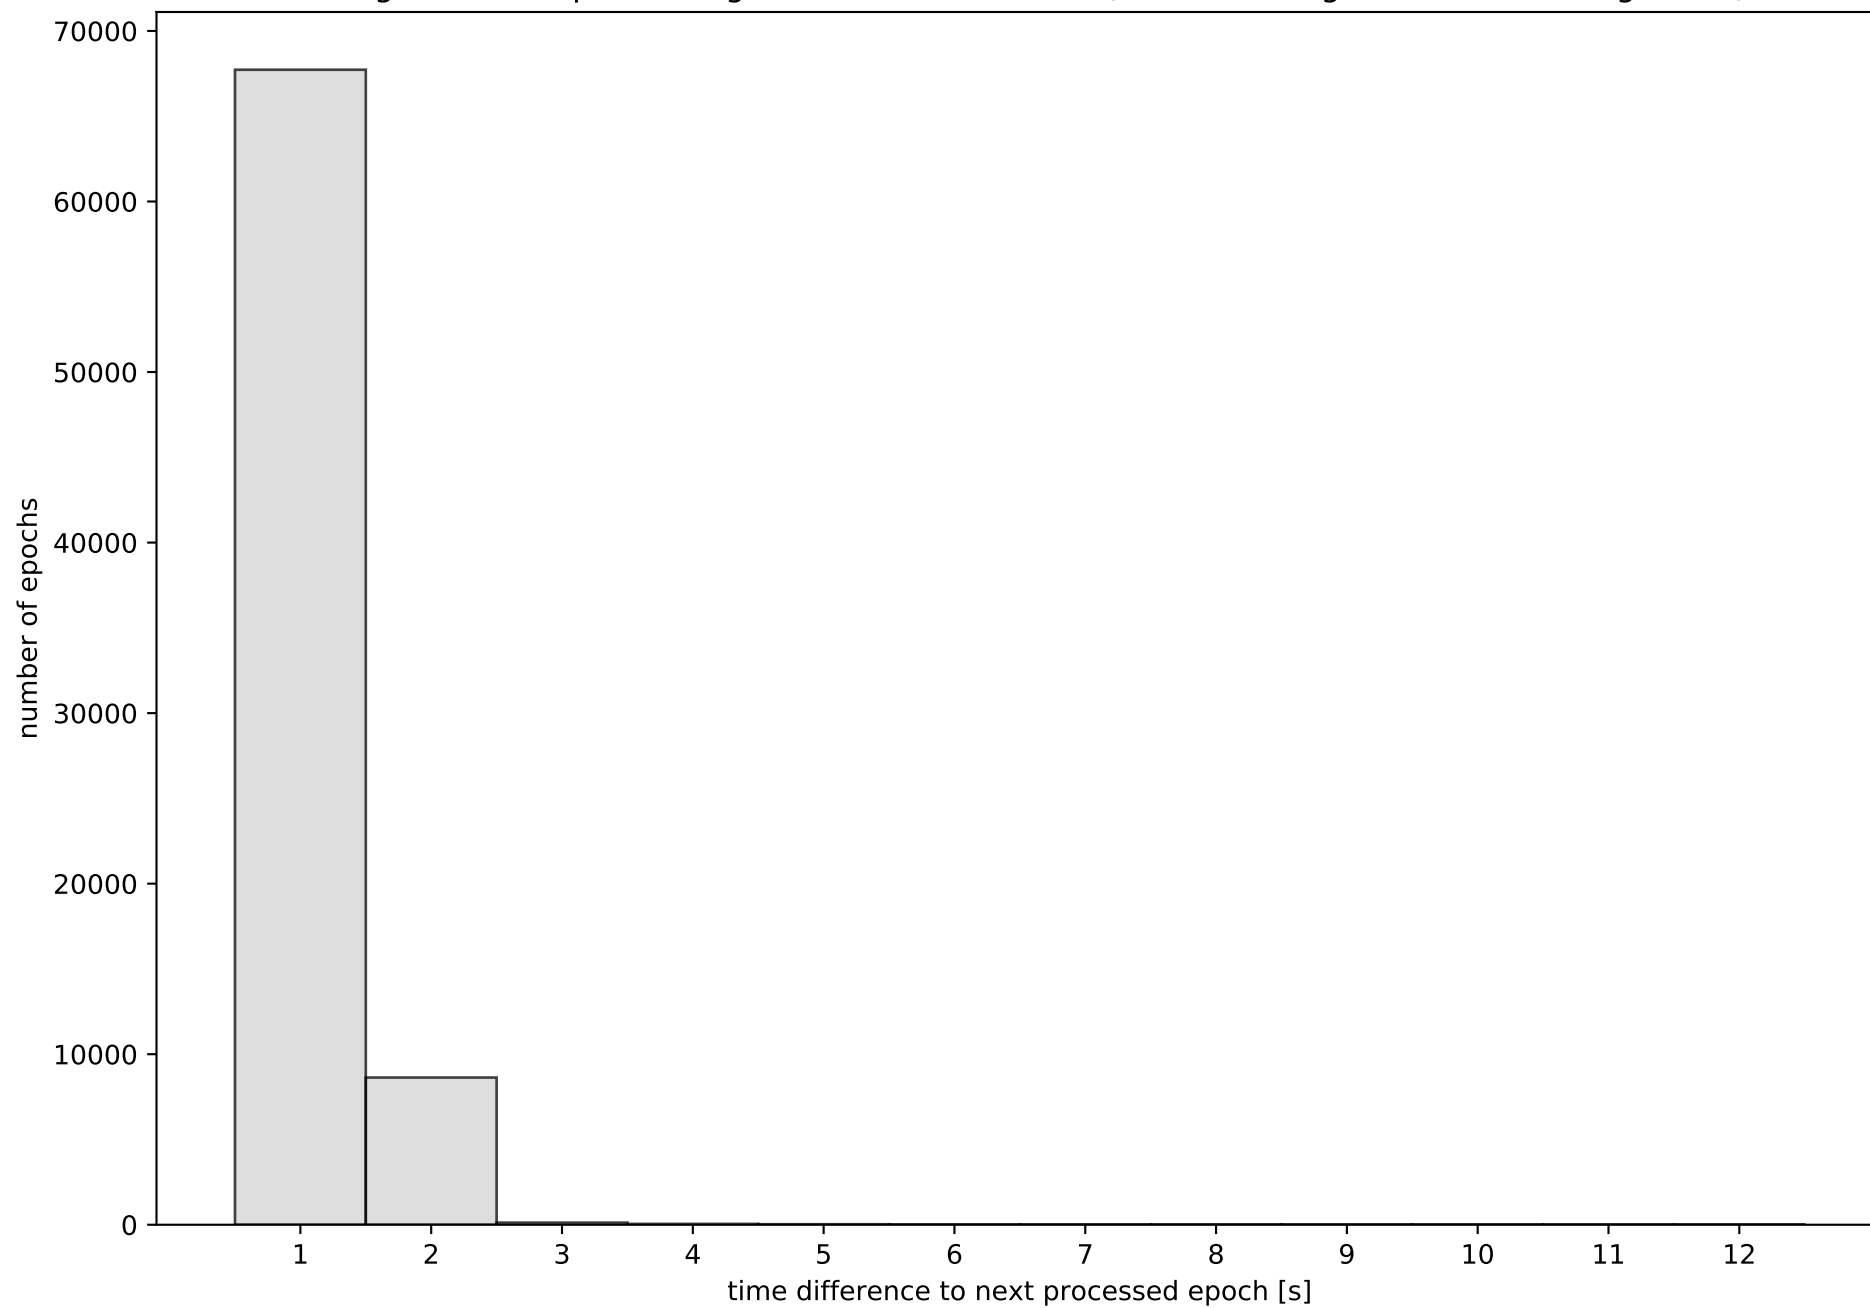


Network NT32 with threshold set to 0.3




Fixing percentage of satellites in network NT32 with threshold set to 0.3

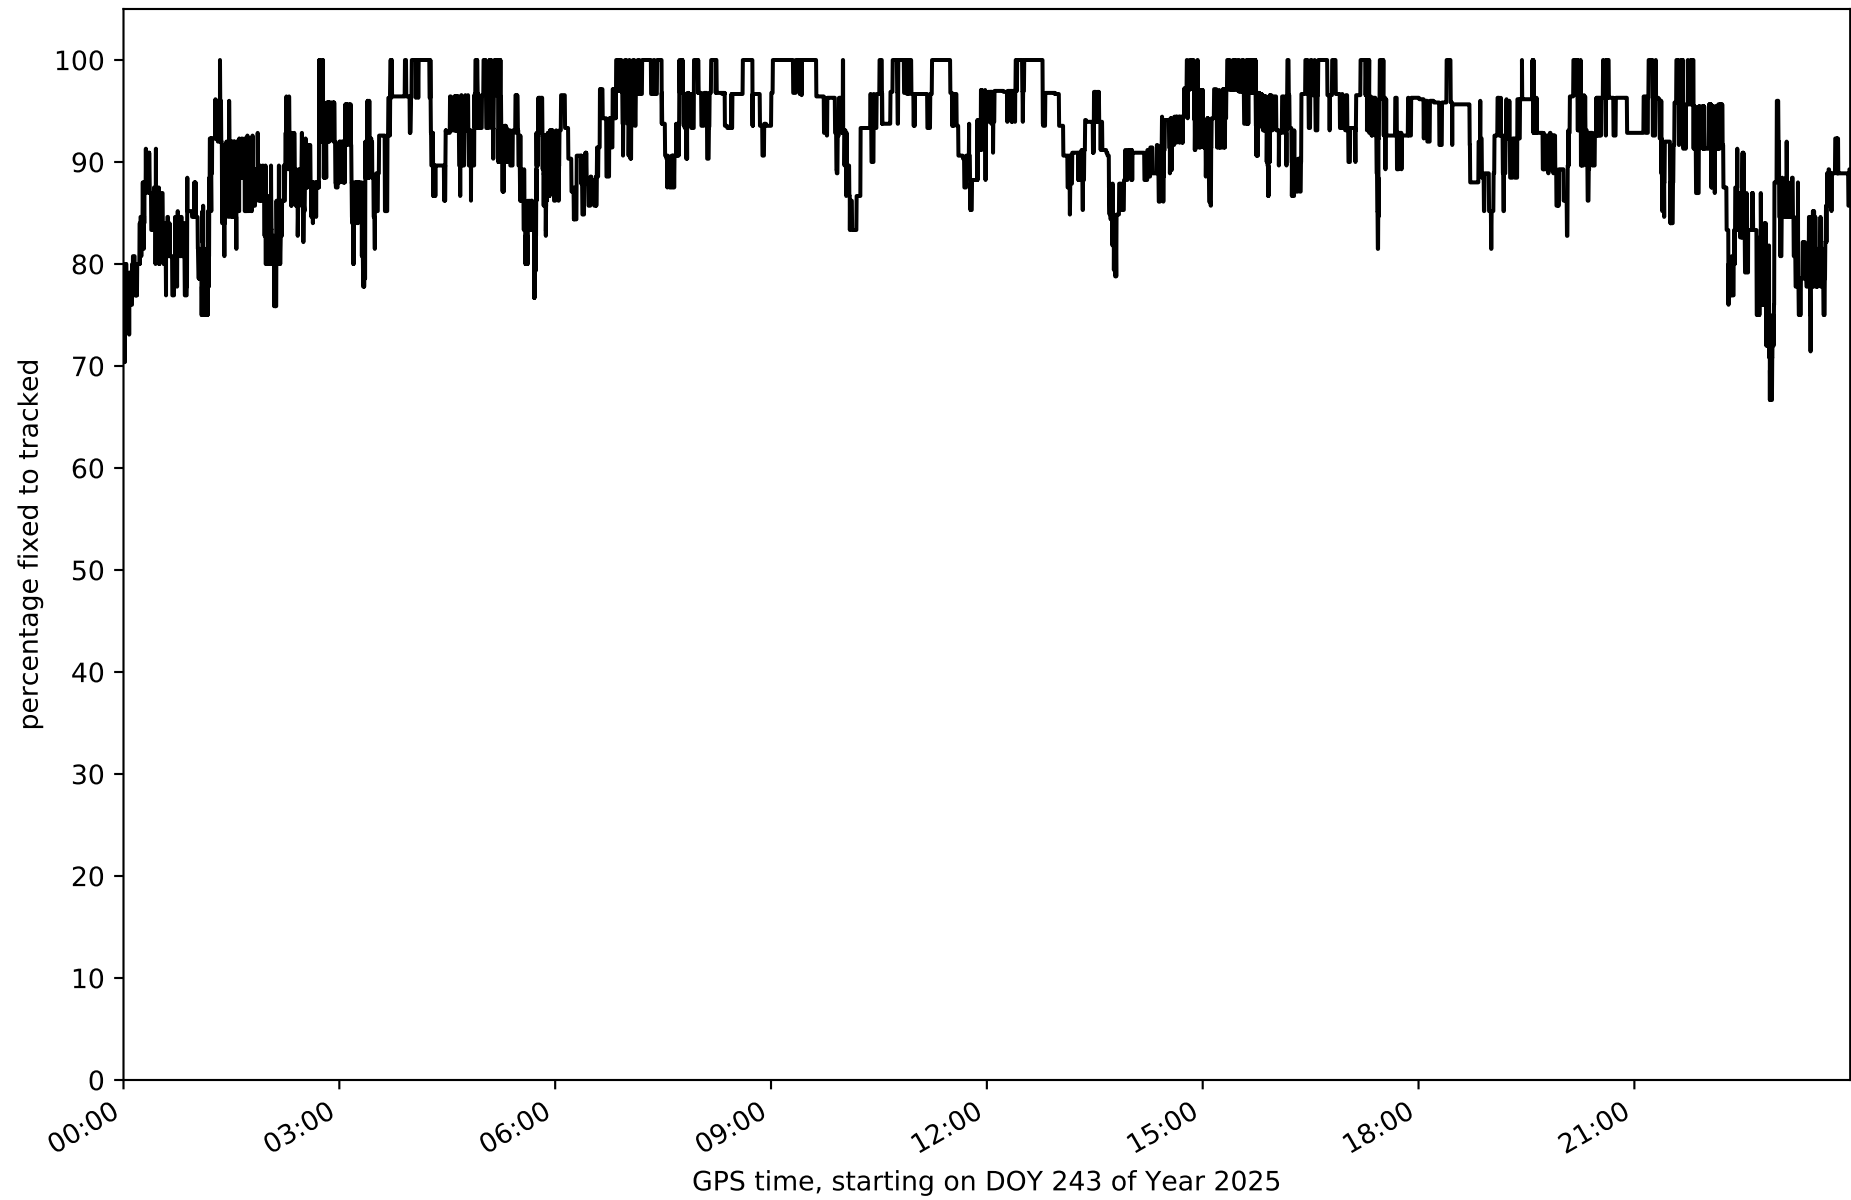


Network NT32 - only GPS with threshold set to 0.3

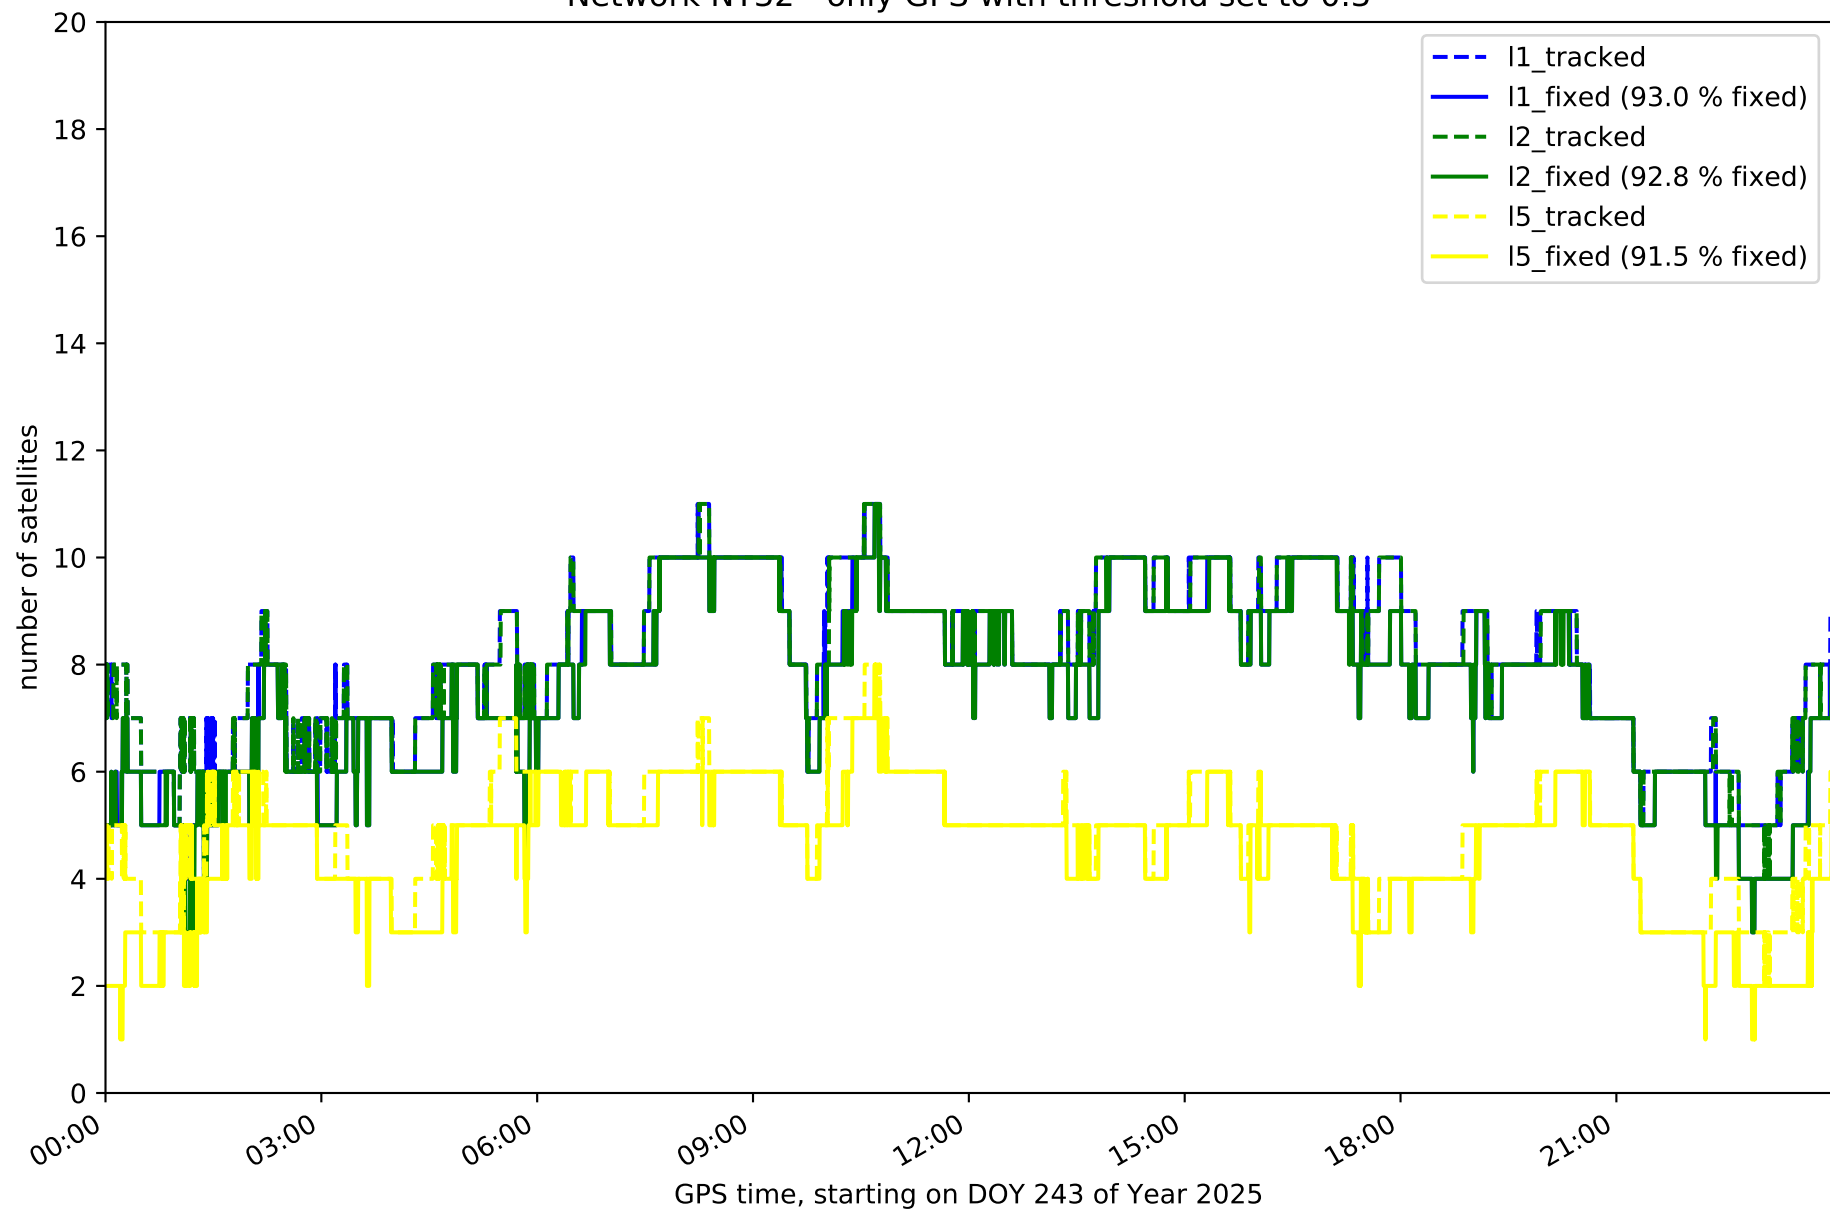


Network NT32 - only GLONASS with threshold set to 0.3

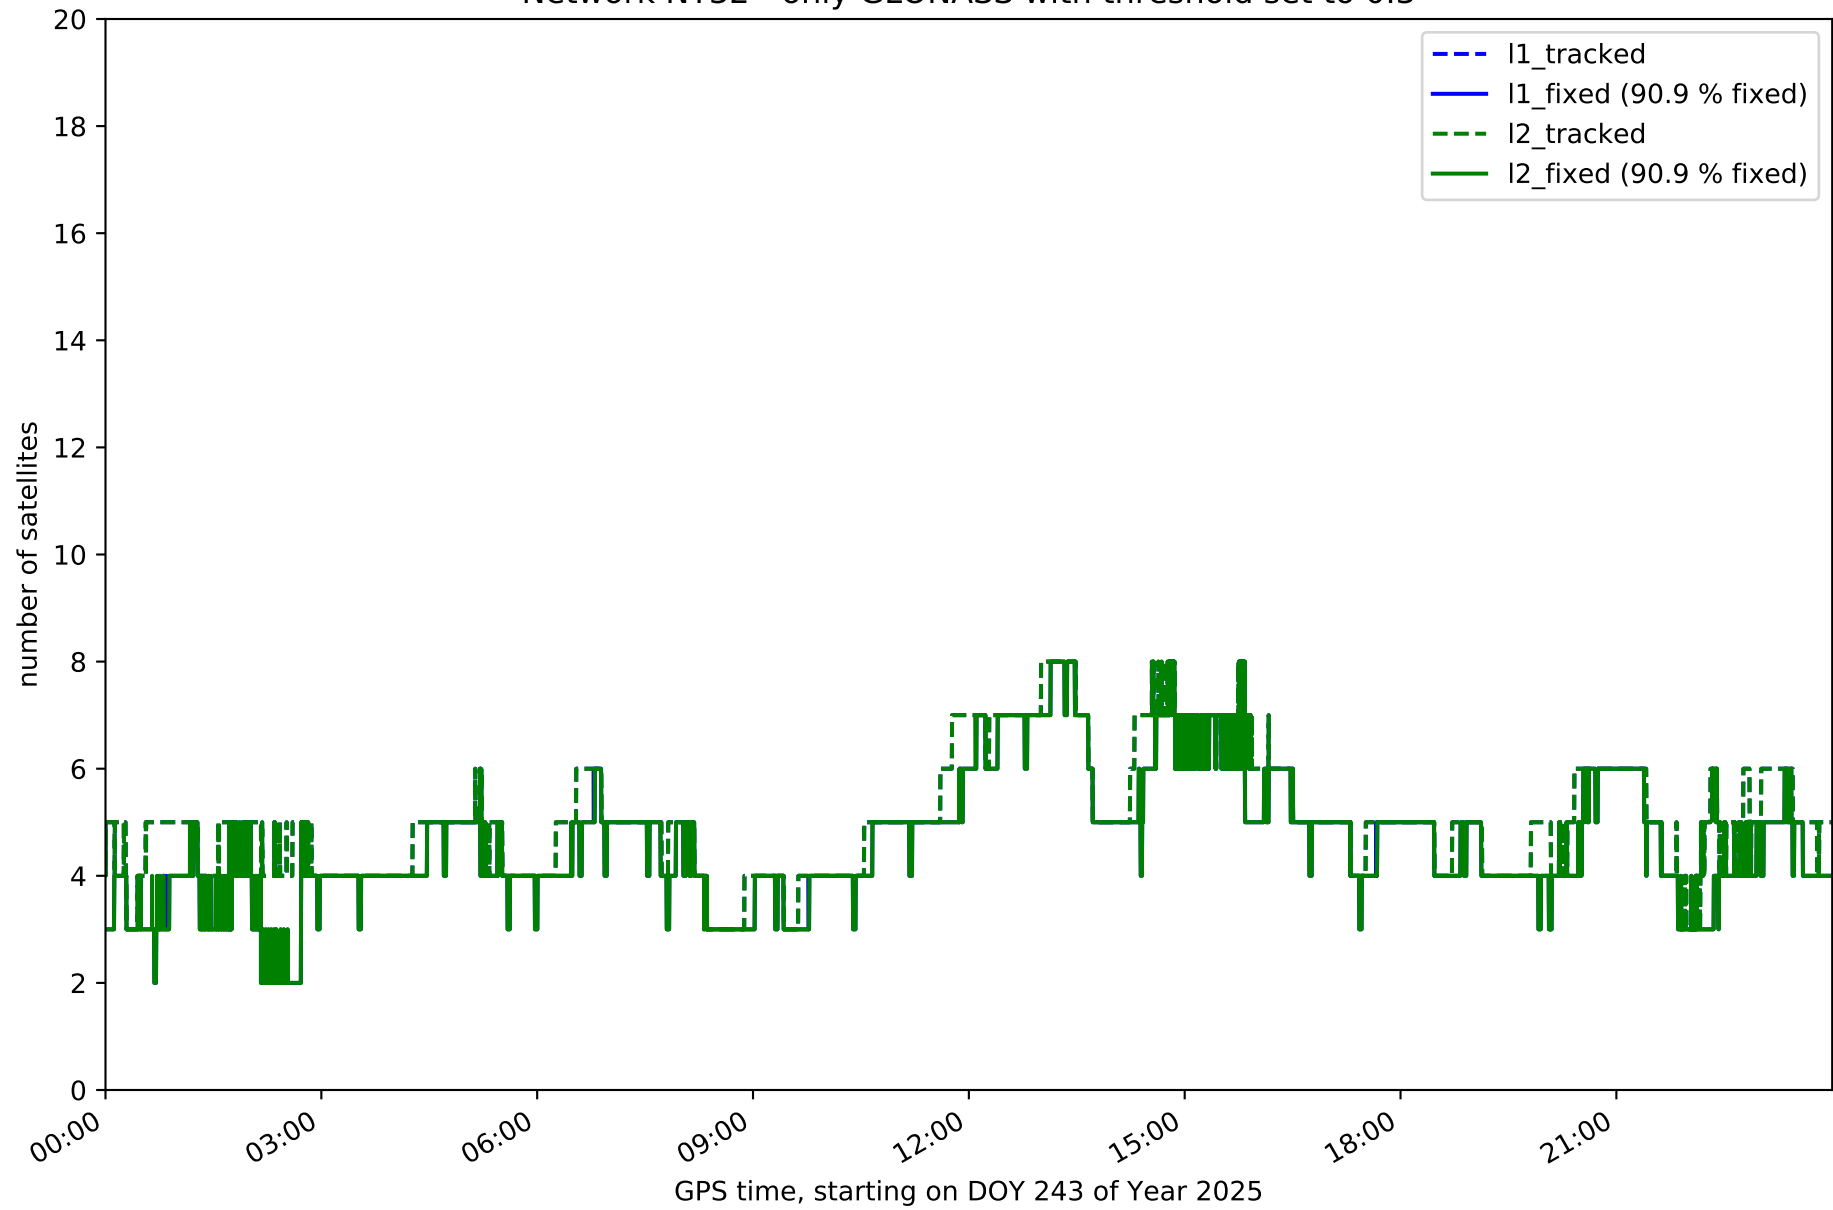


Network NT32 - only BDS with threshold set to 0.3

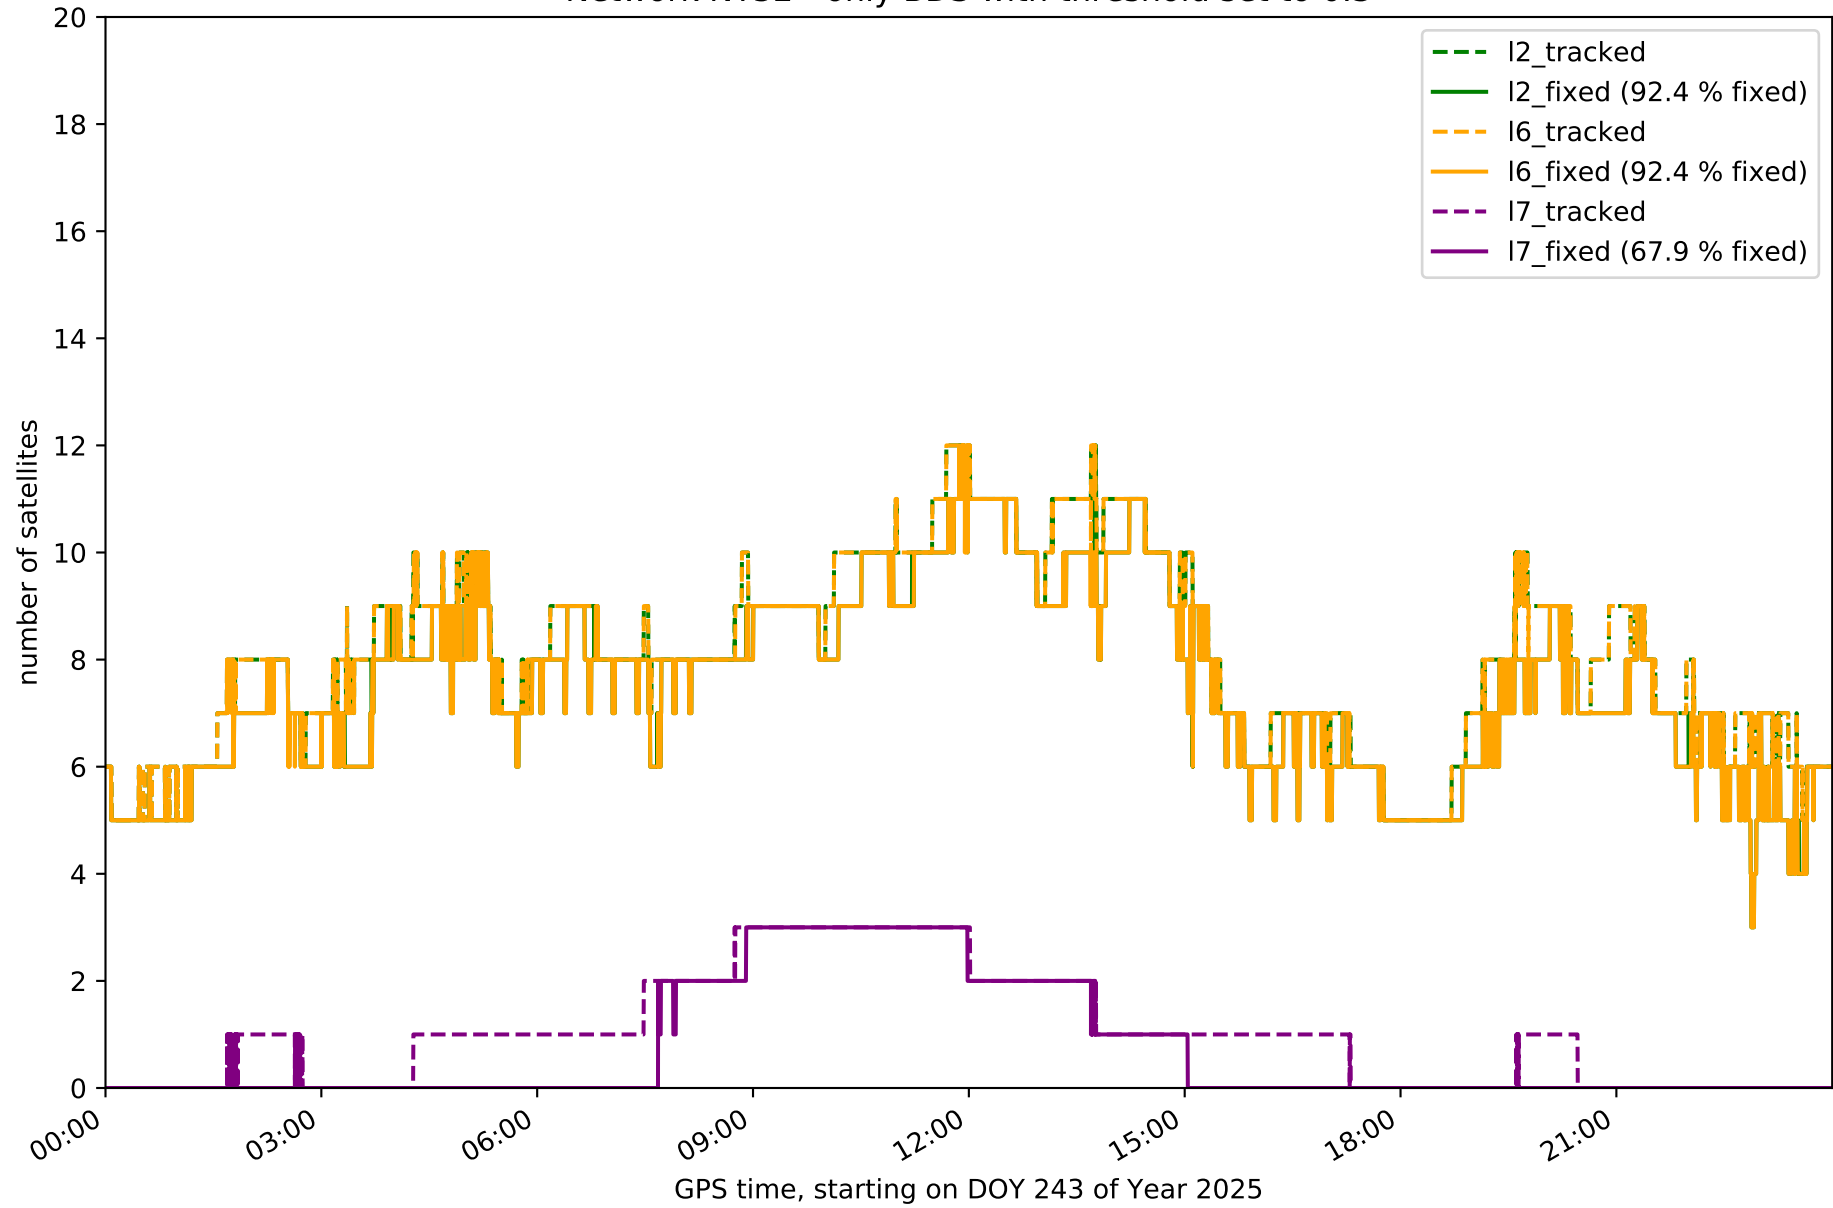


Network NT32 - only Galileo with threshold set to 0.3

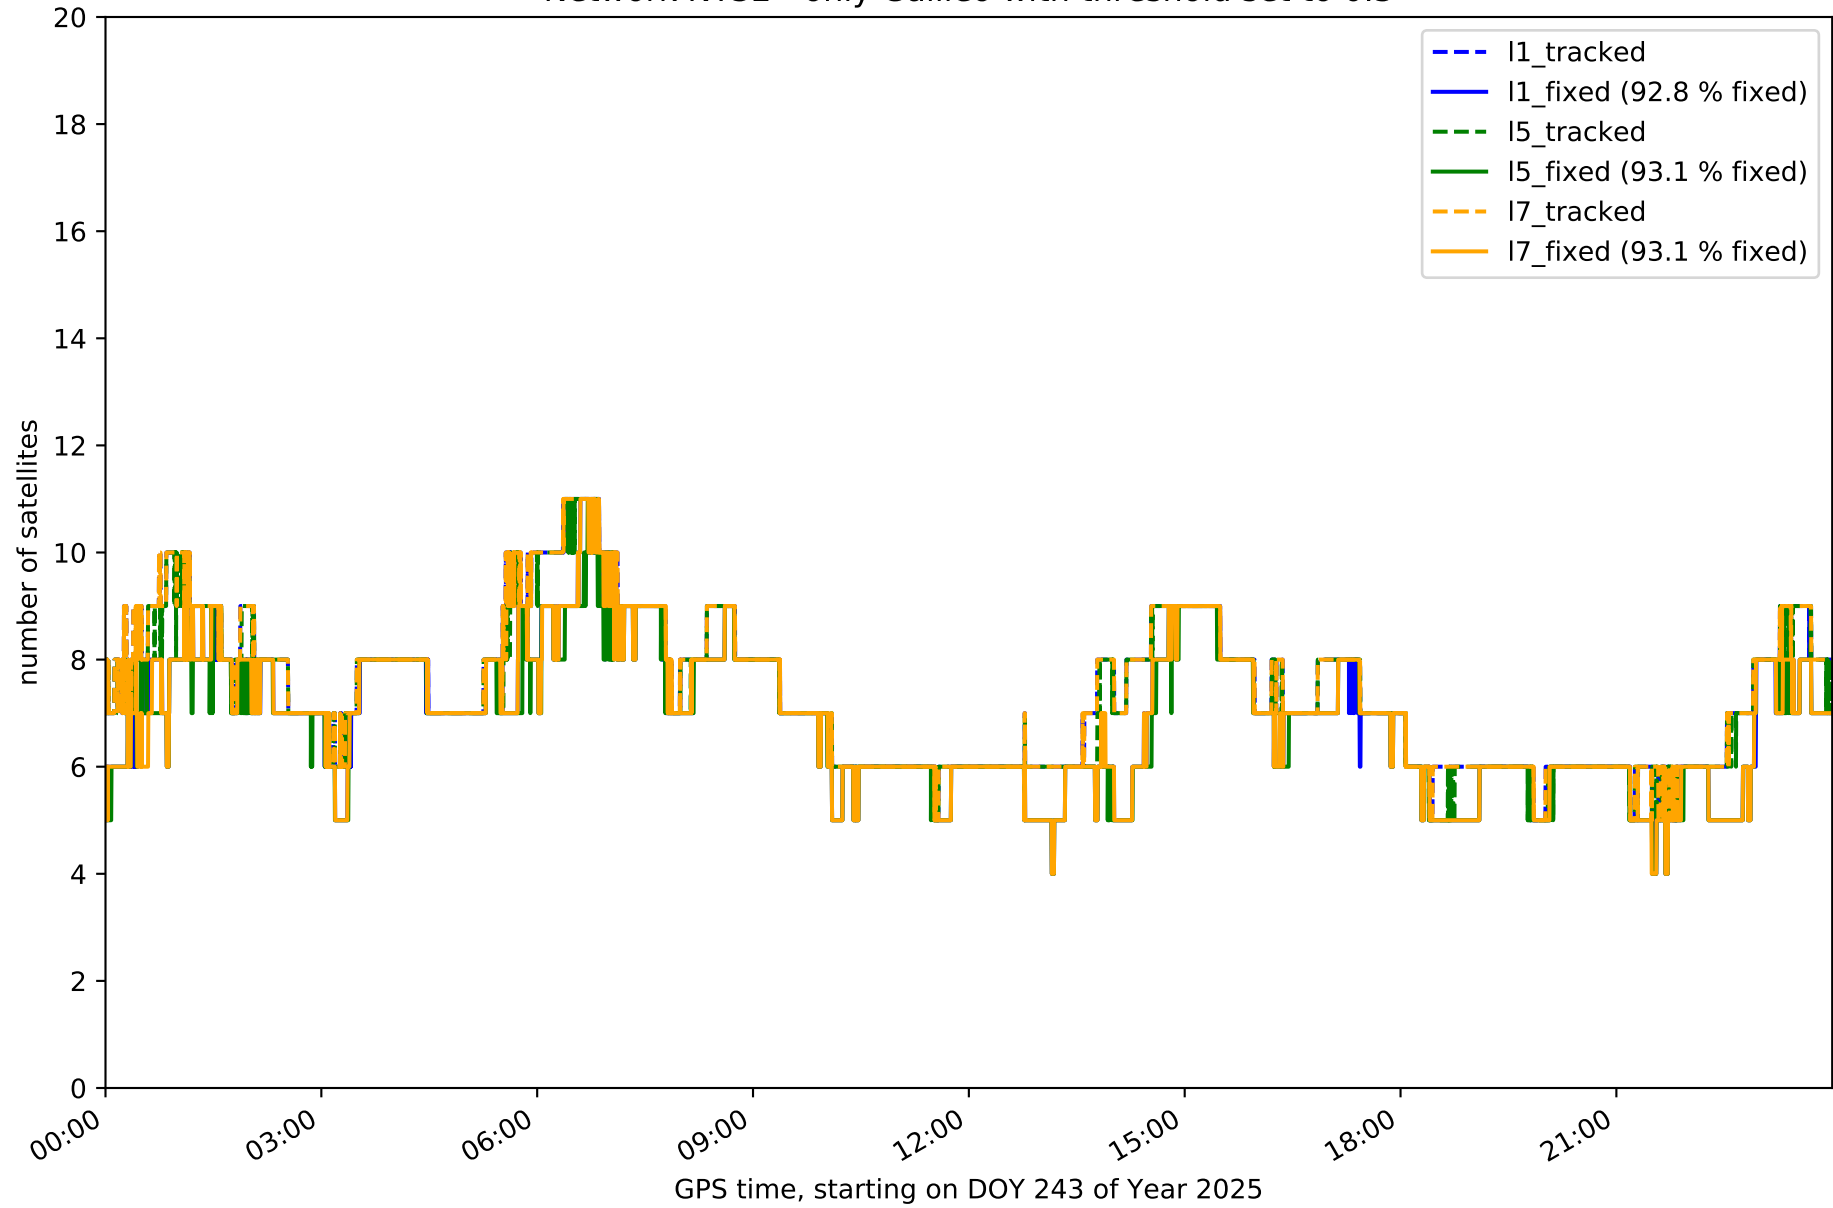


Station EH01 in network NT32

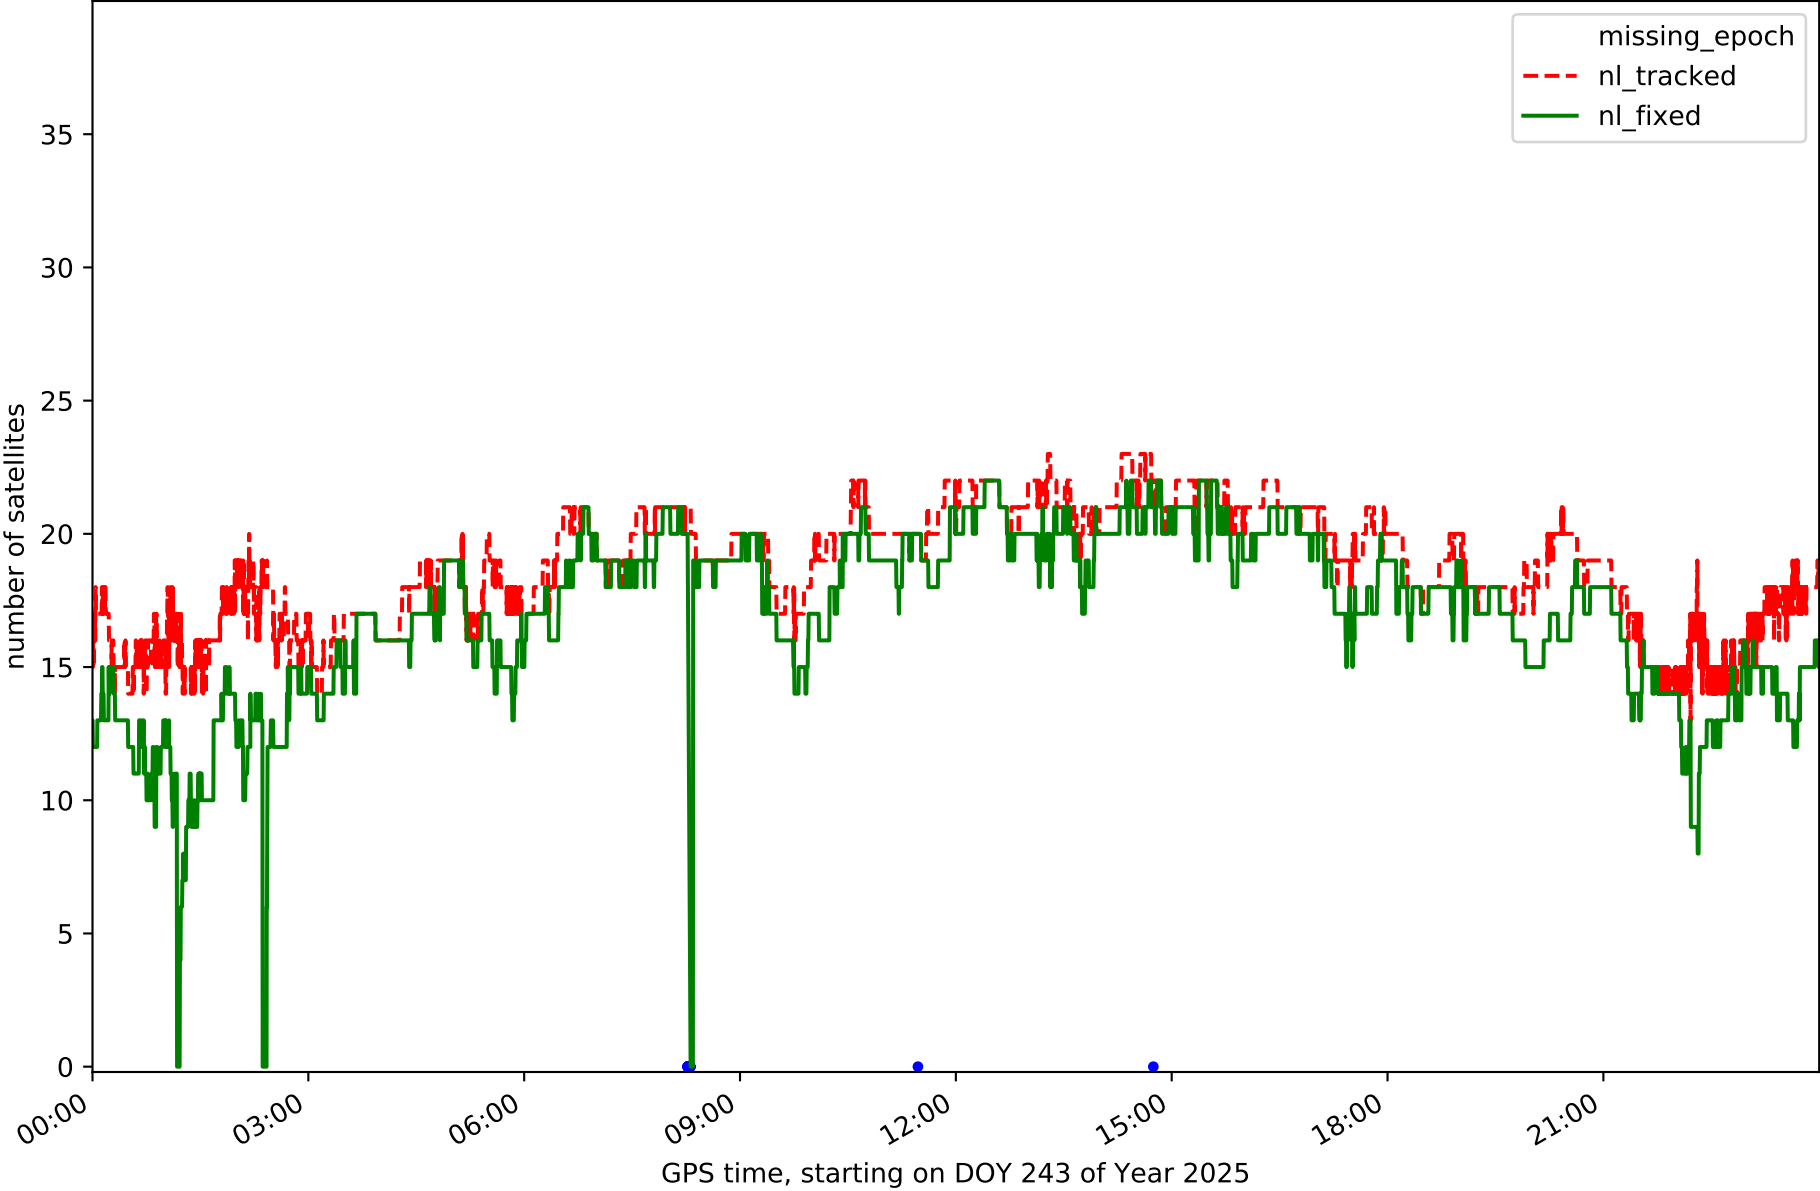


Station EH02 in network NT32

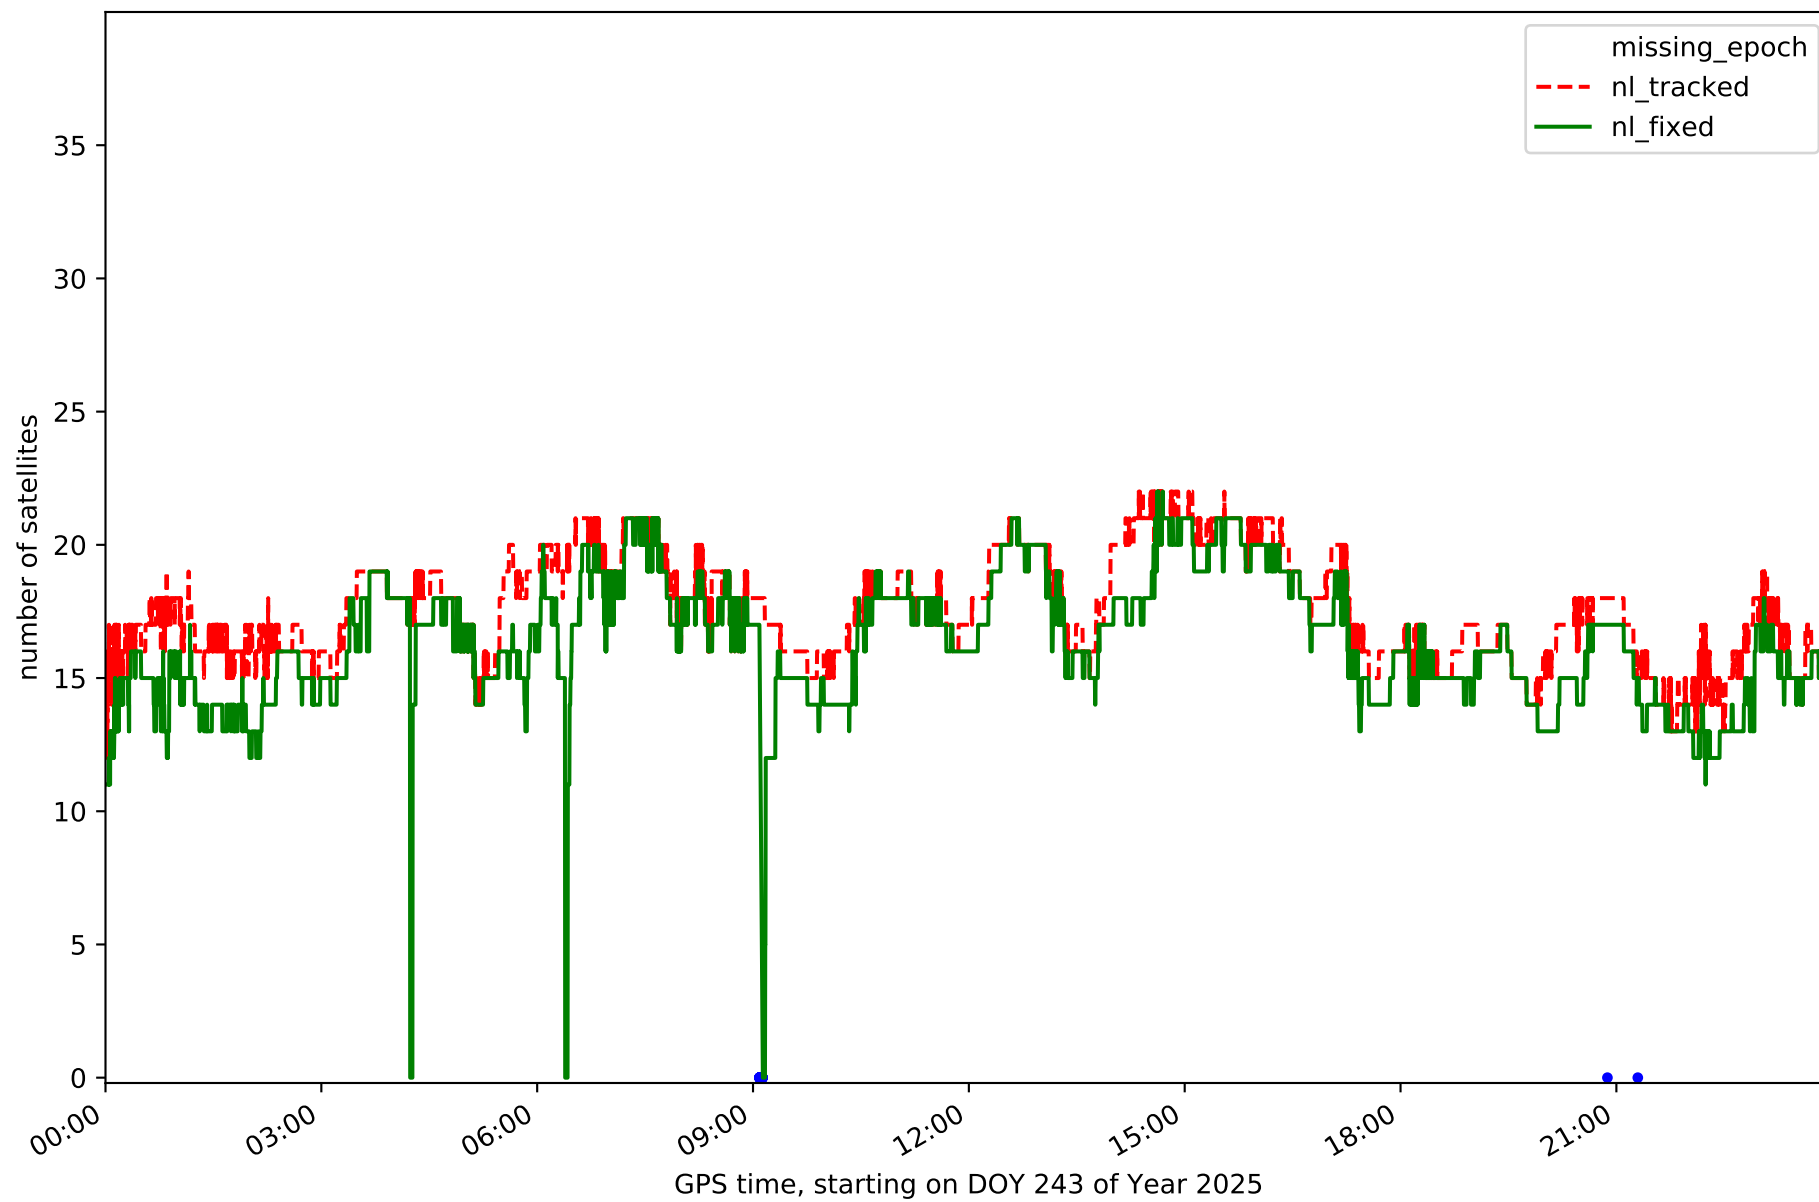


Station GOM1 in network NT32

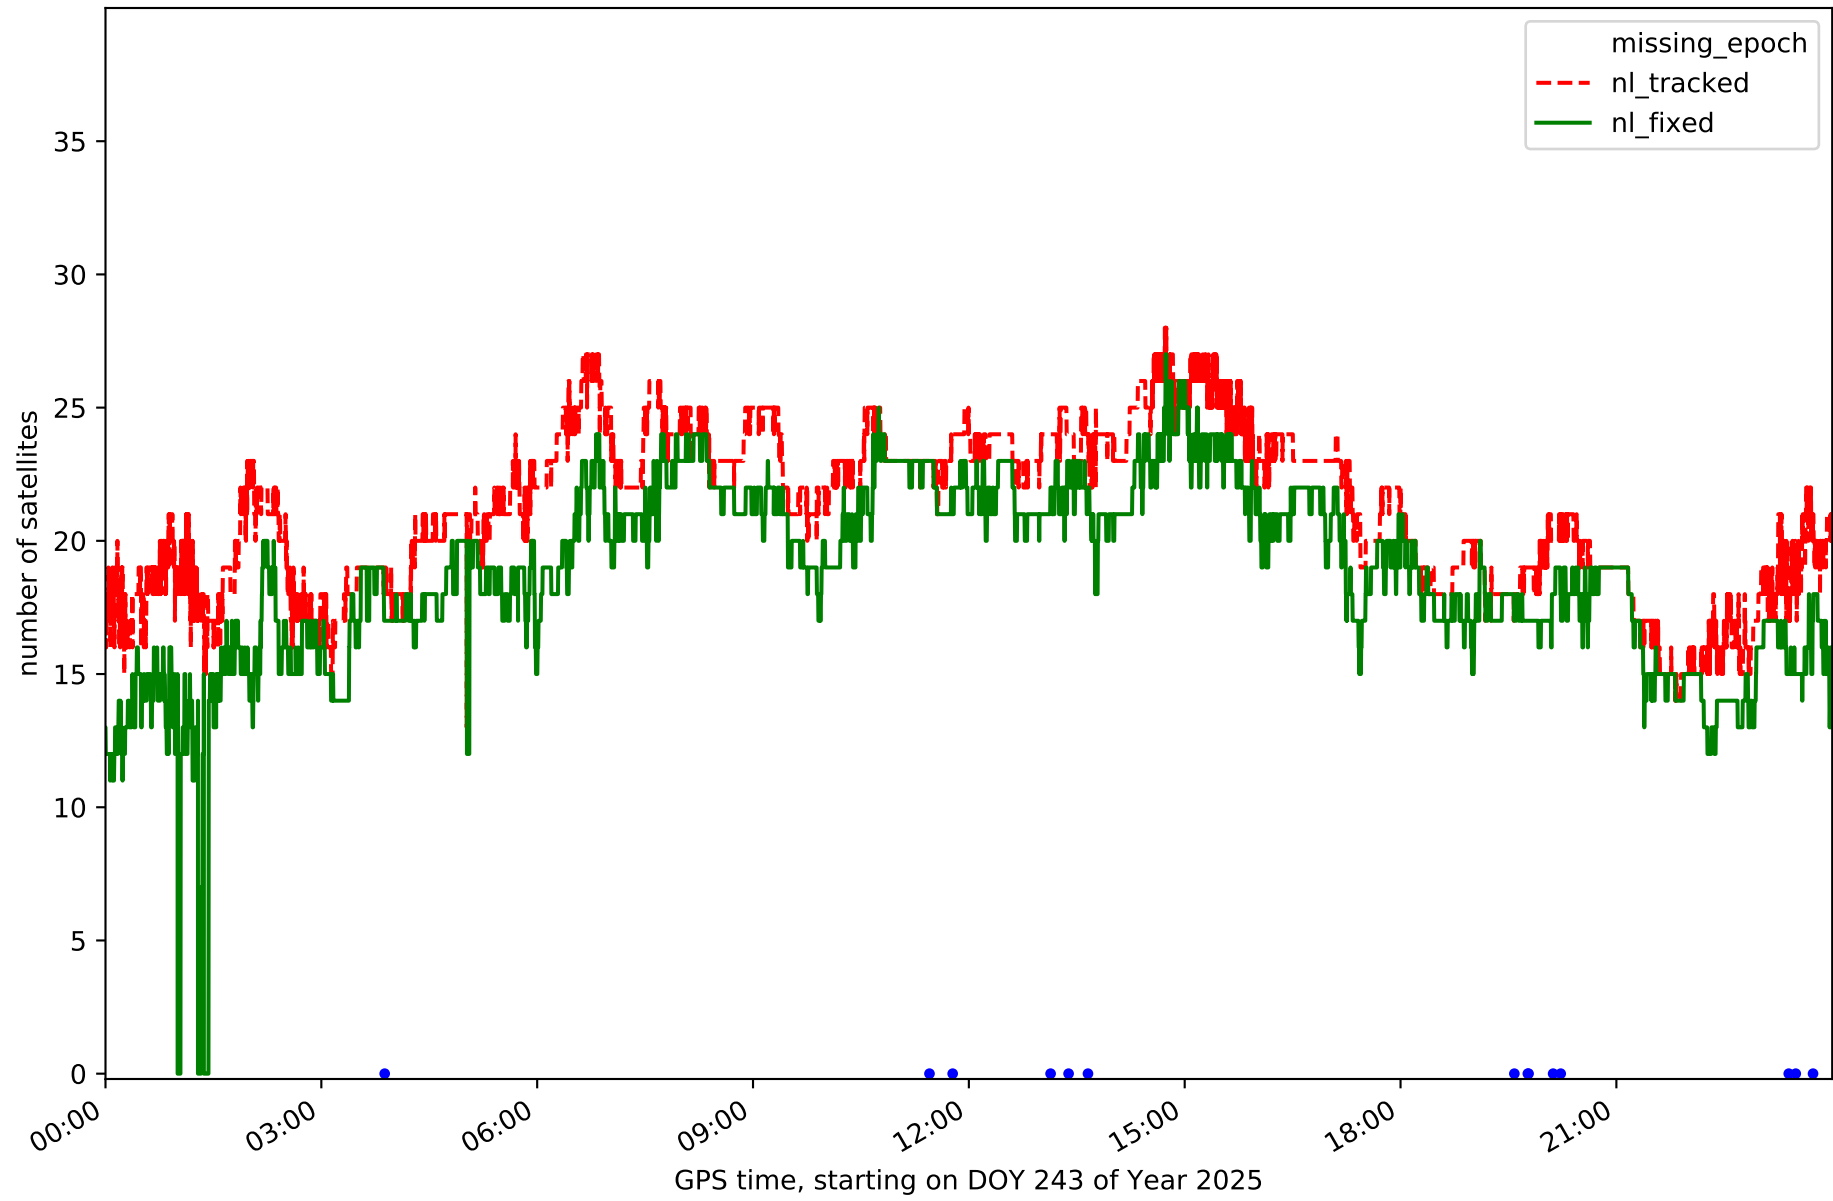


Station IZAN in network NT32

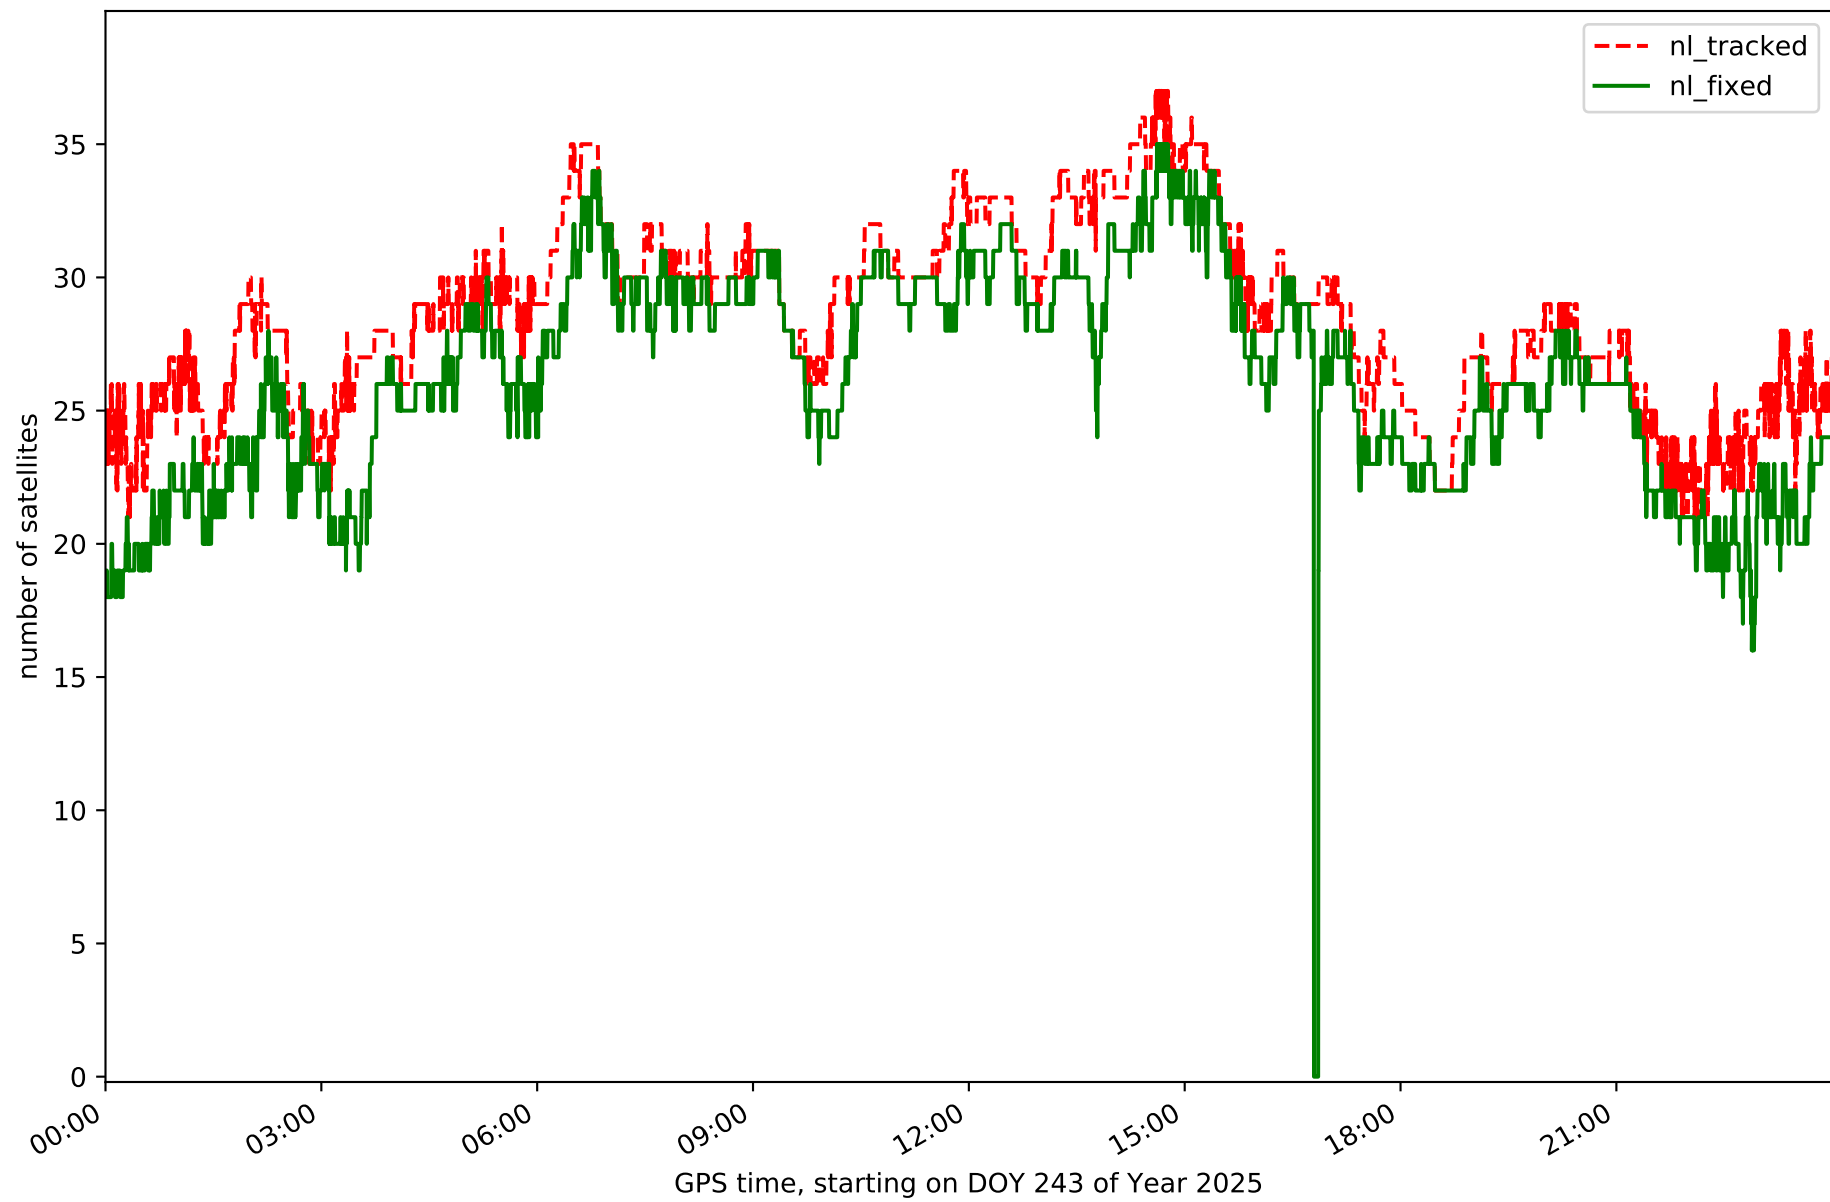


Station LP01 in network NT32

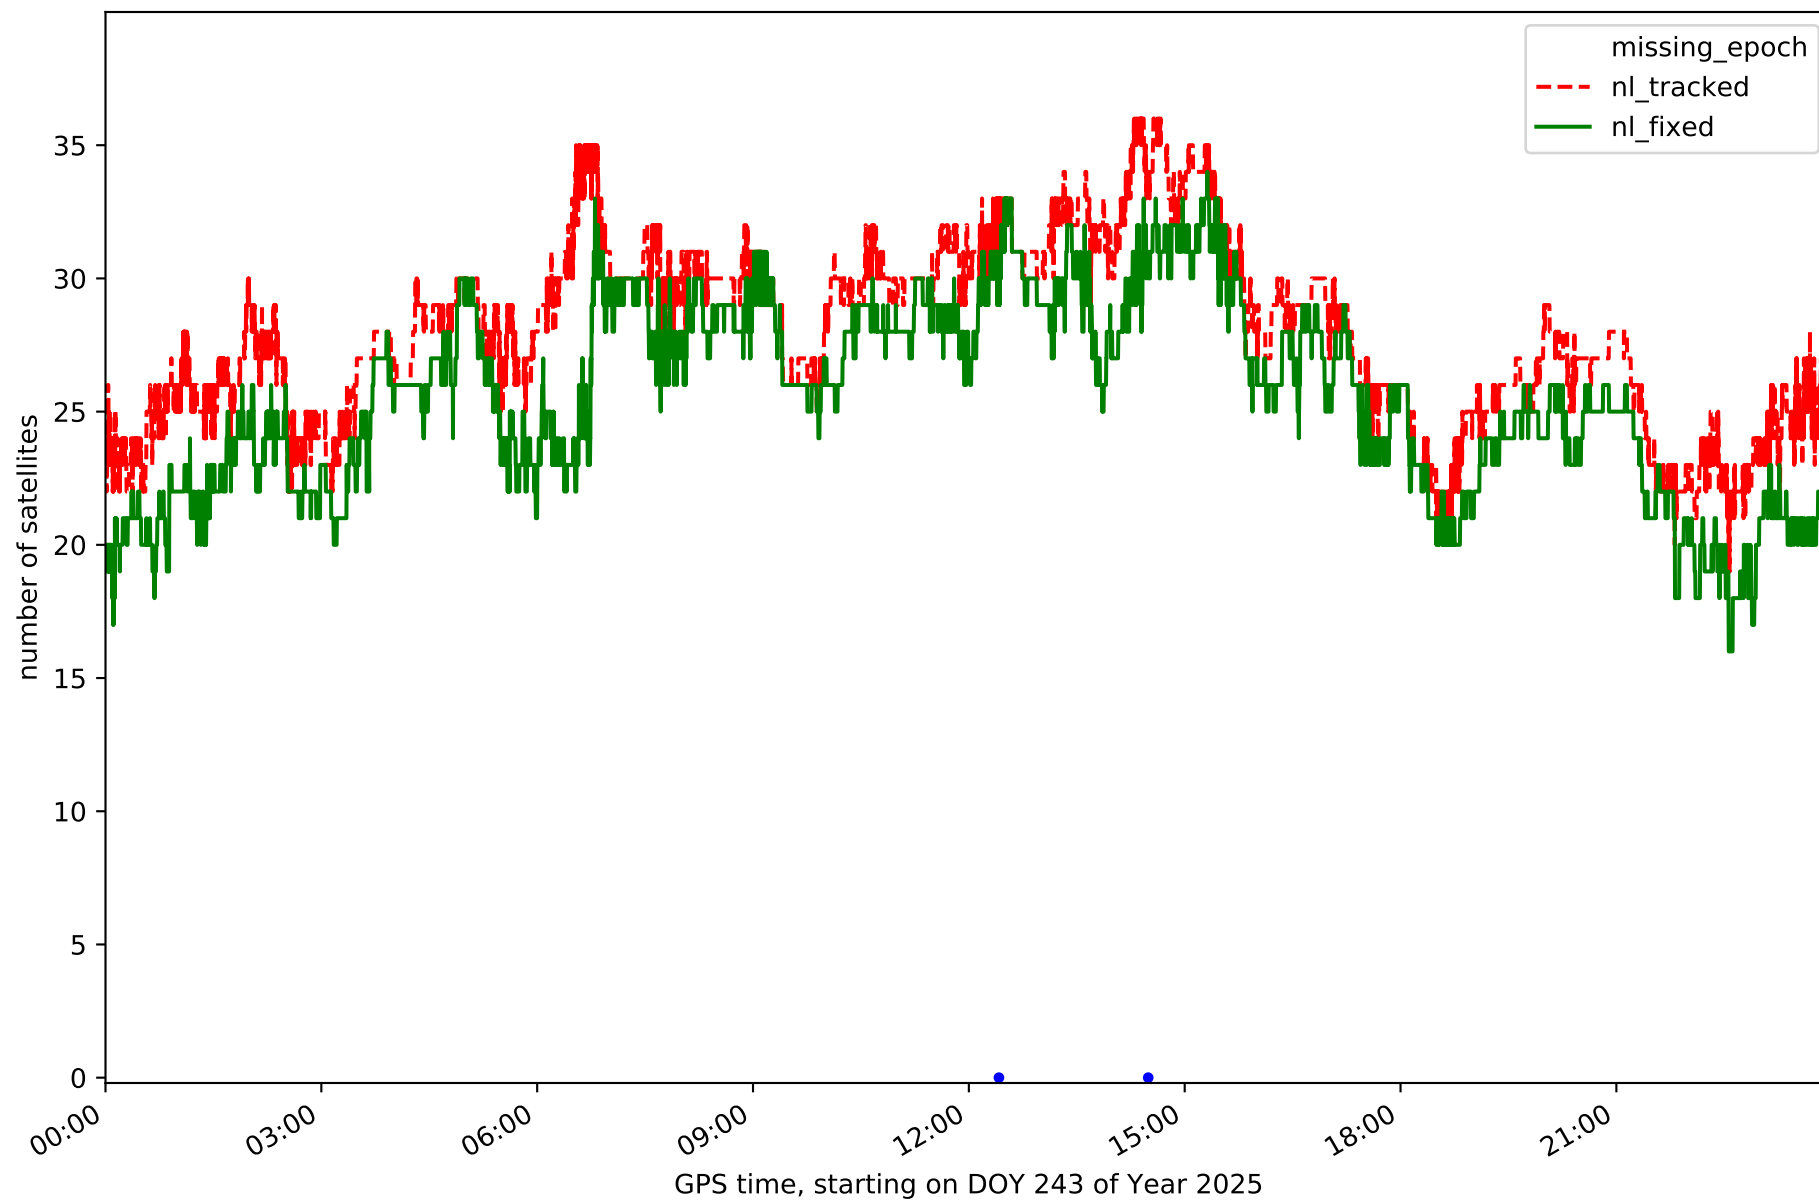


Station LP03 in network NT32

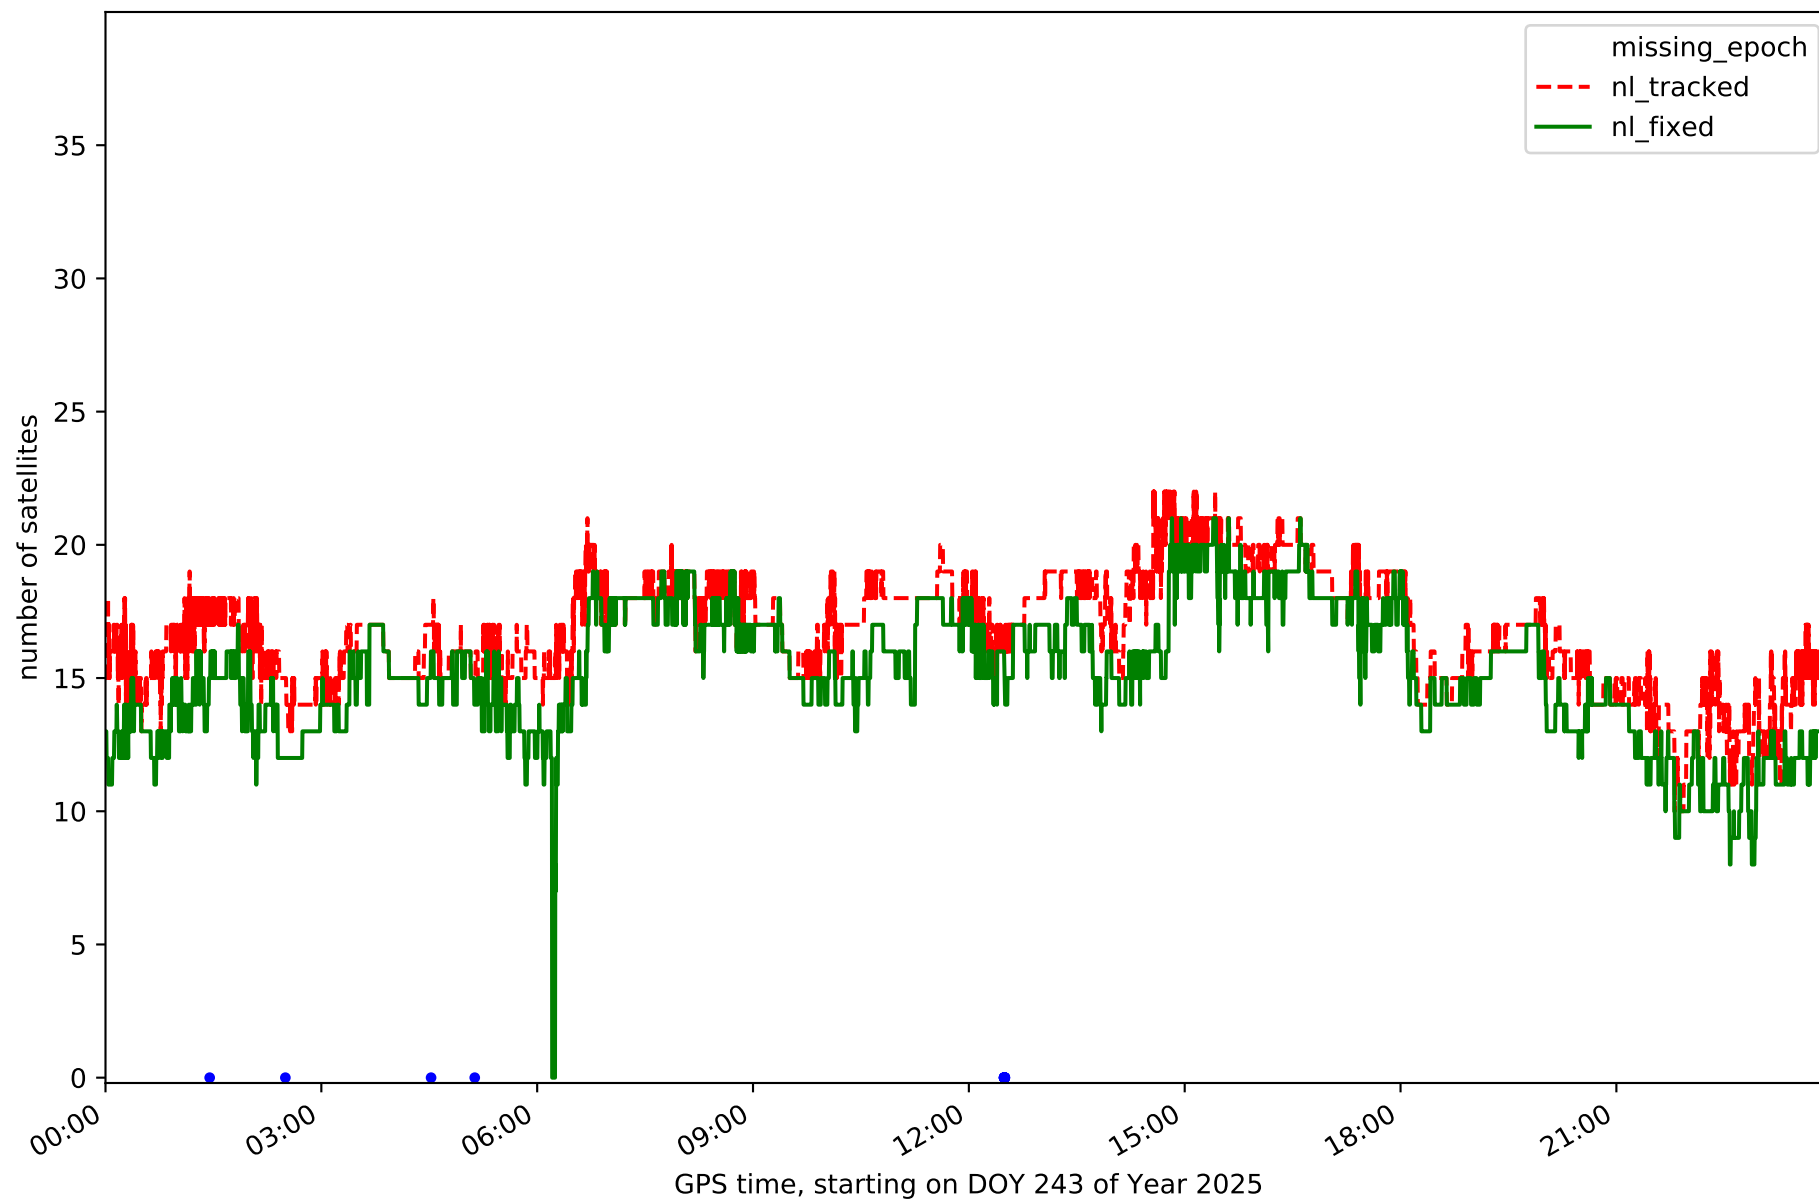


Station LPAL in network NT32

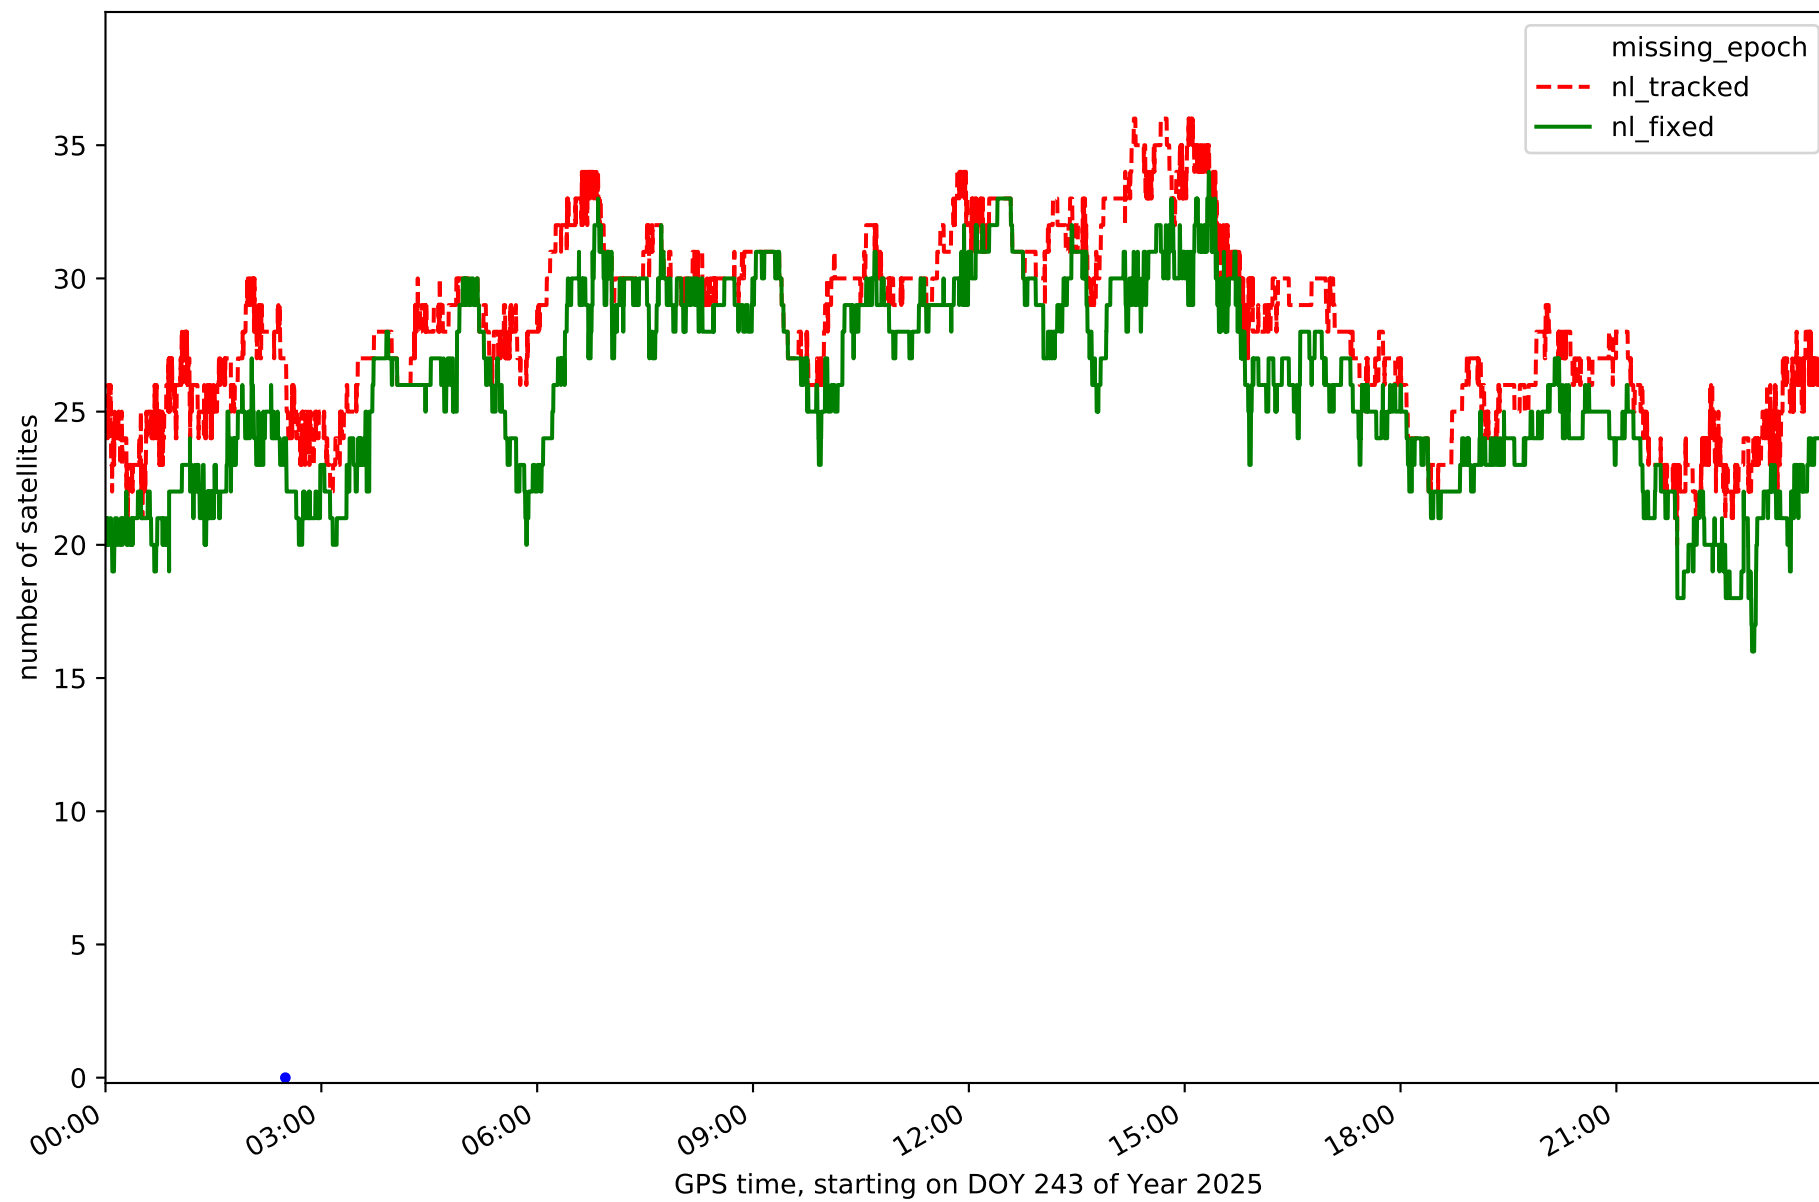


Station LRES in network NT32

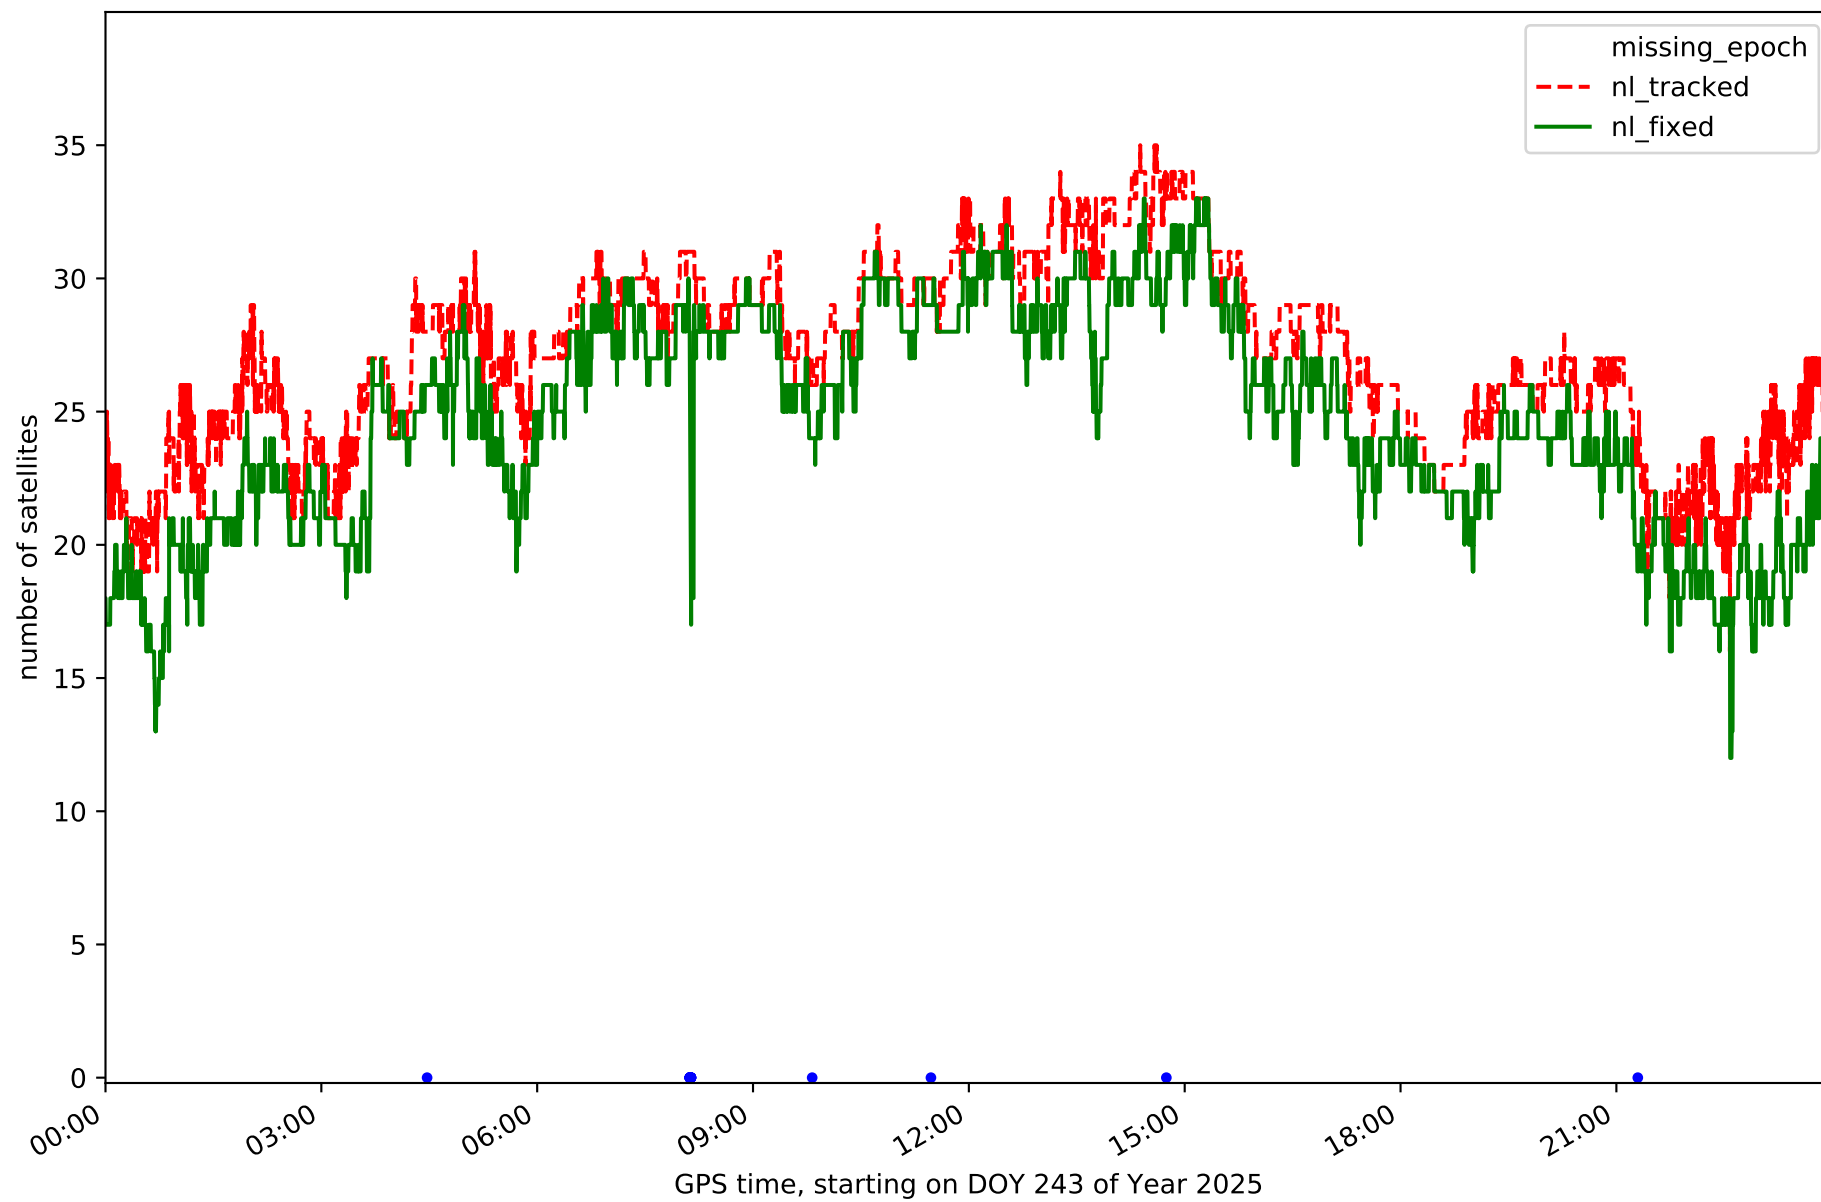


Station TN01 in network NT32

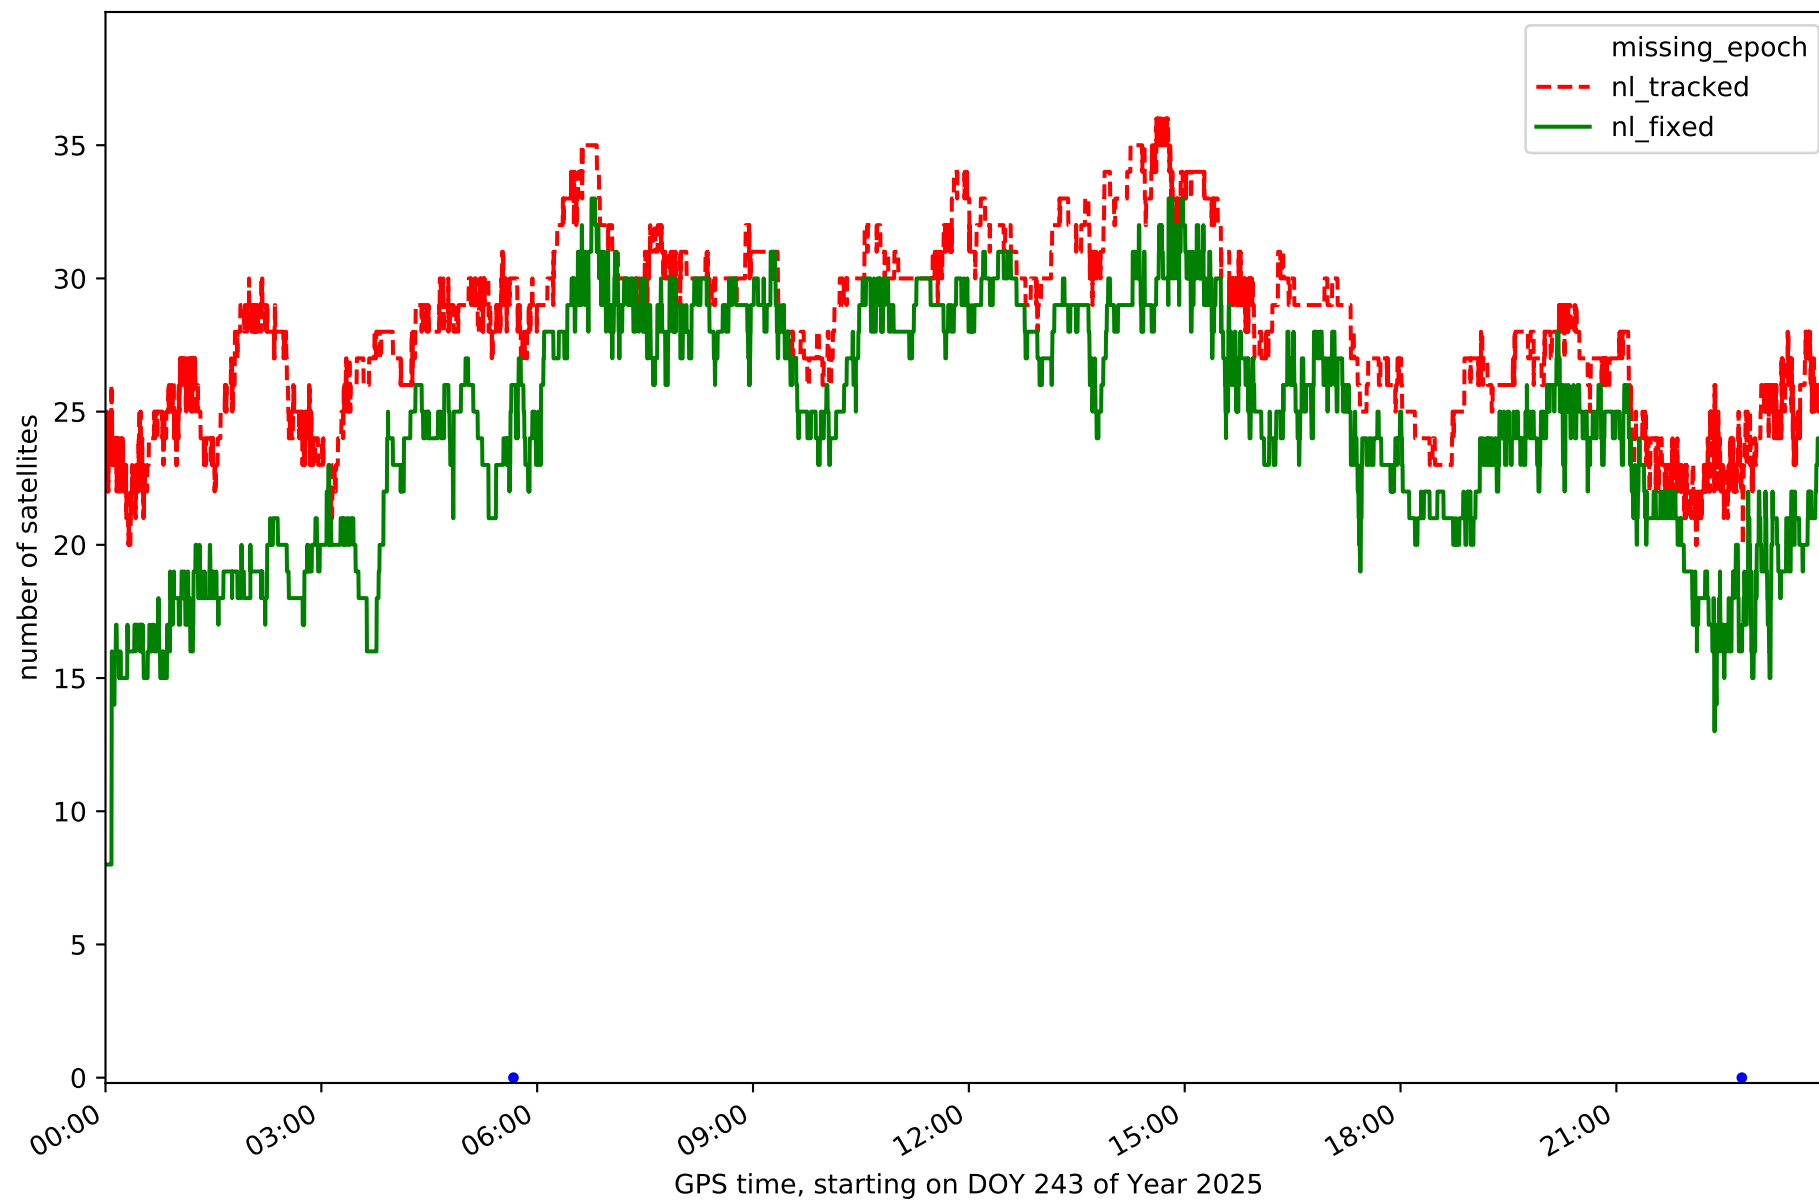

Station TN02 in network NT32

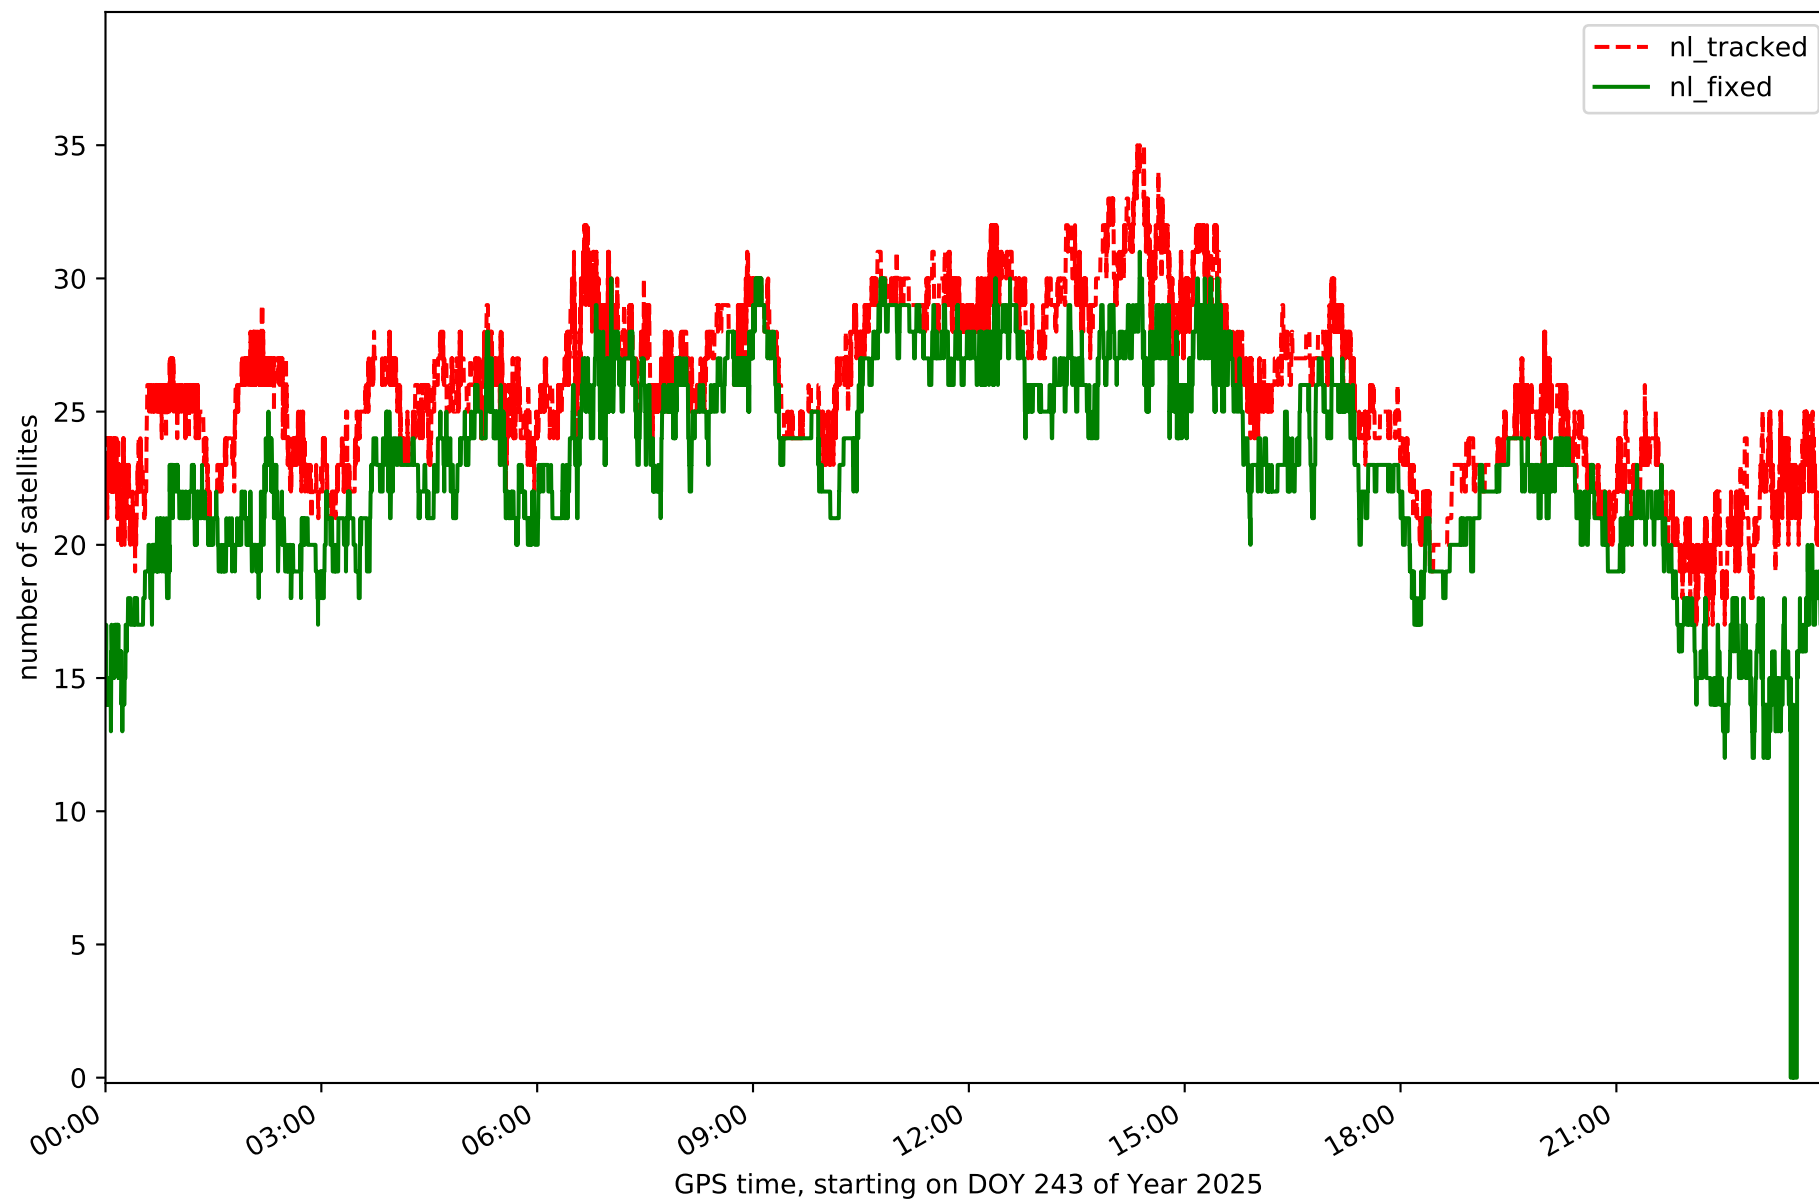


Station TN03 in network NT32

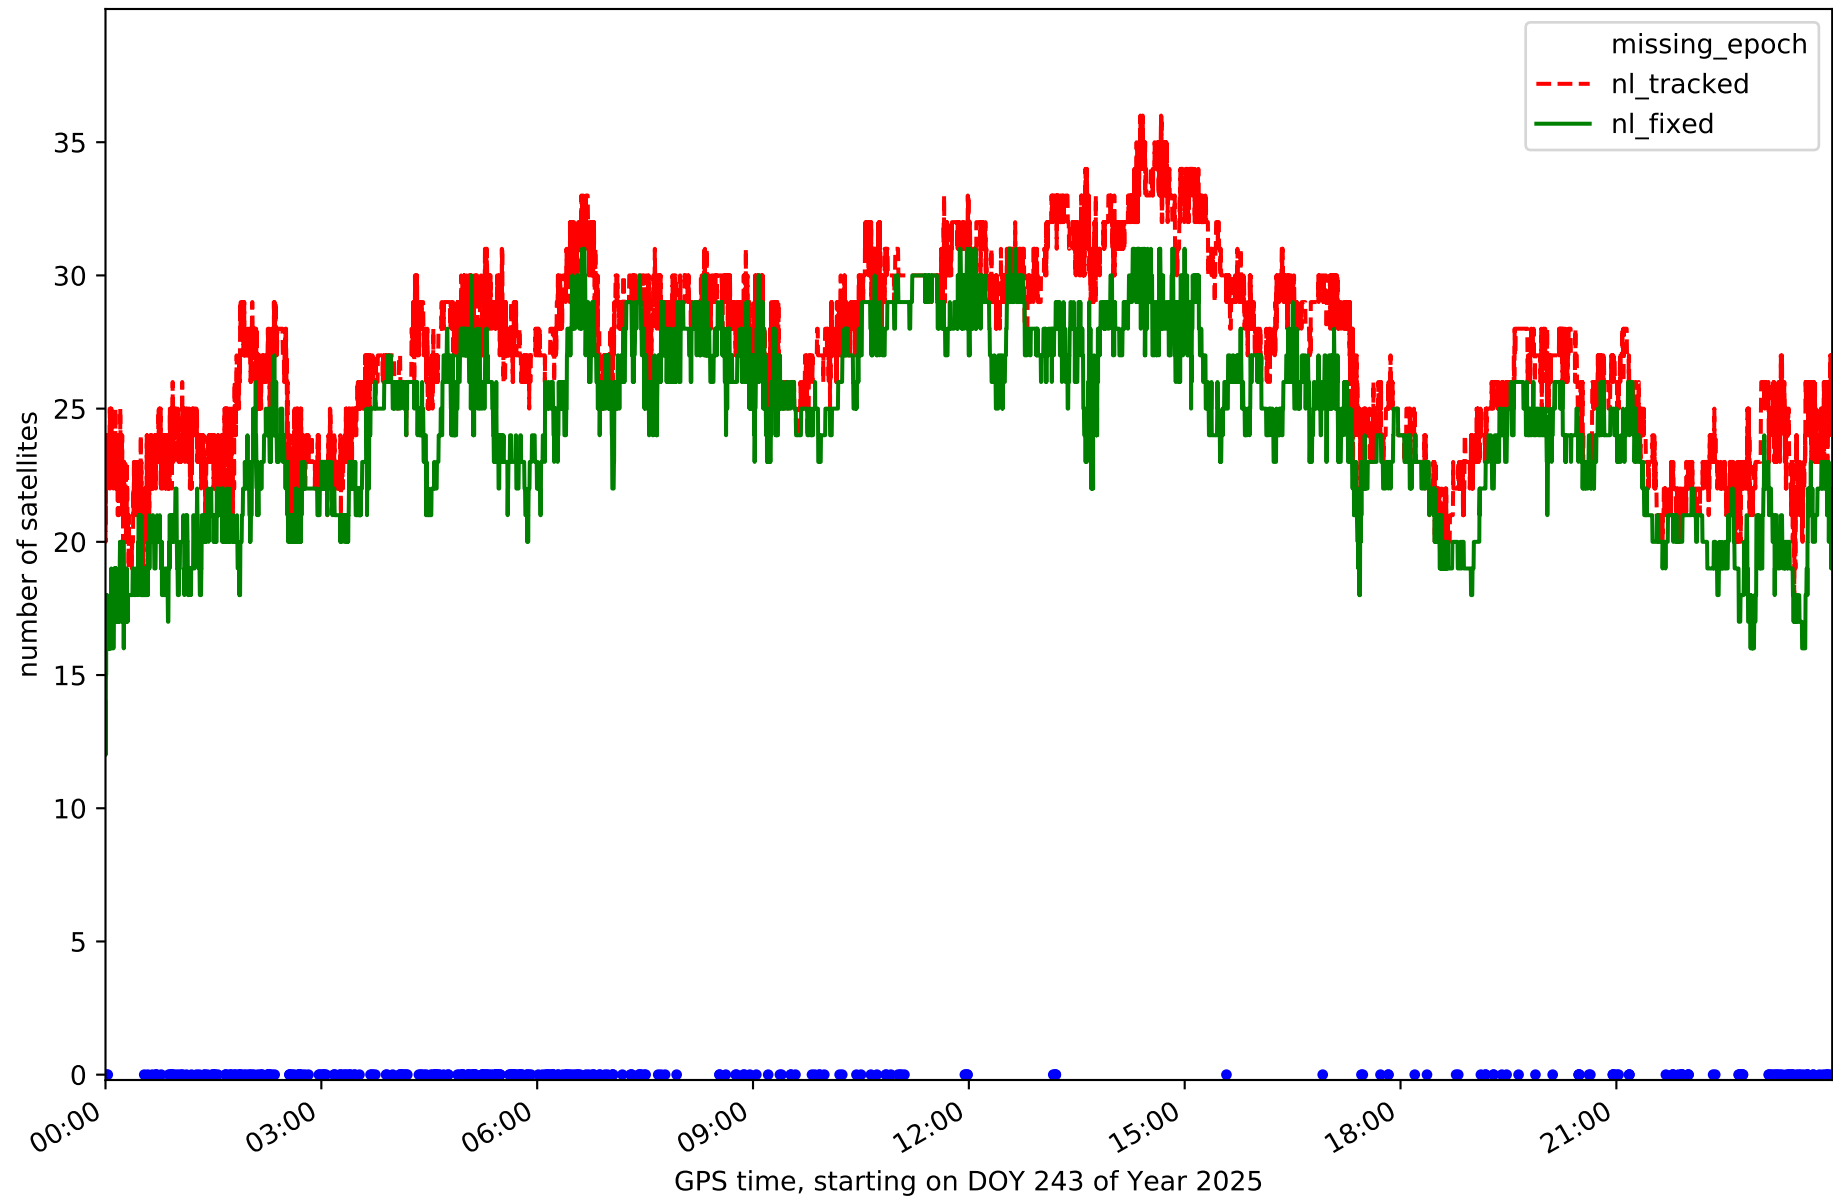


Station TN04 in network NT32




Station TN06 in network NT32

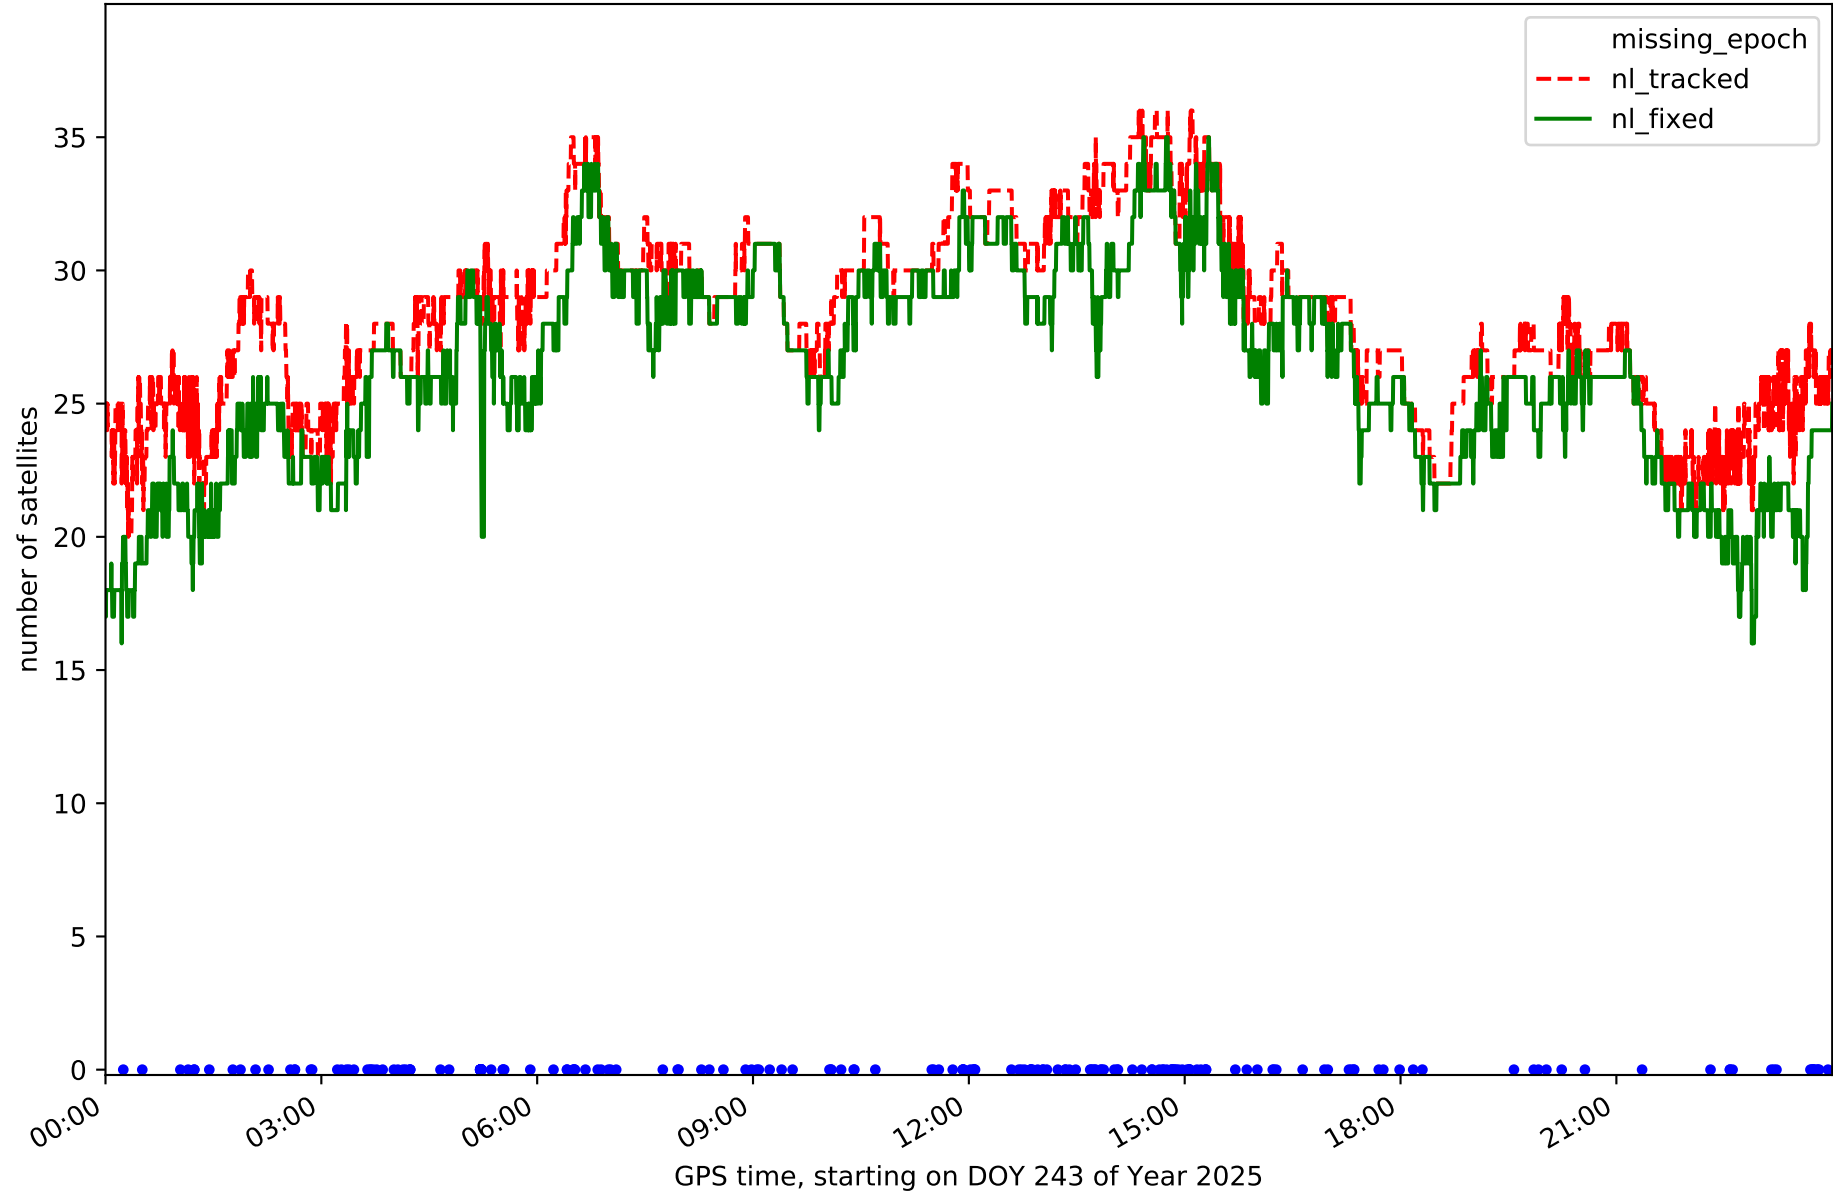


Station TN09 in network NT32

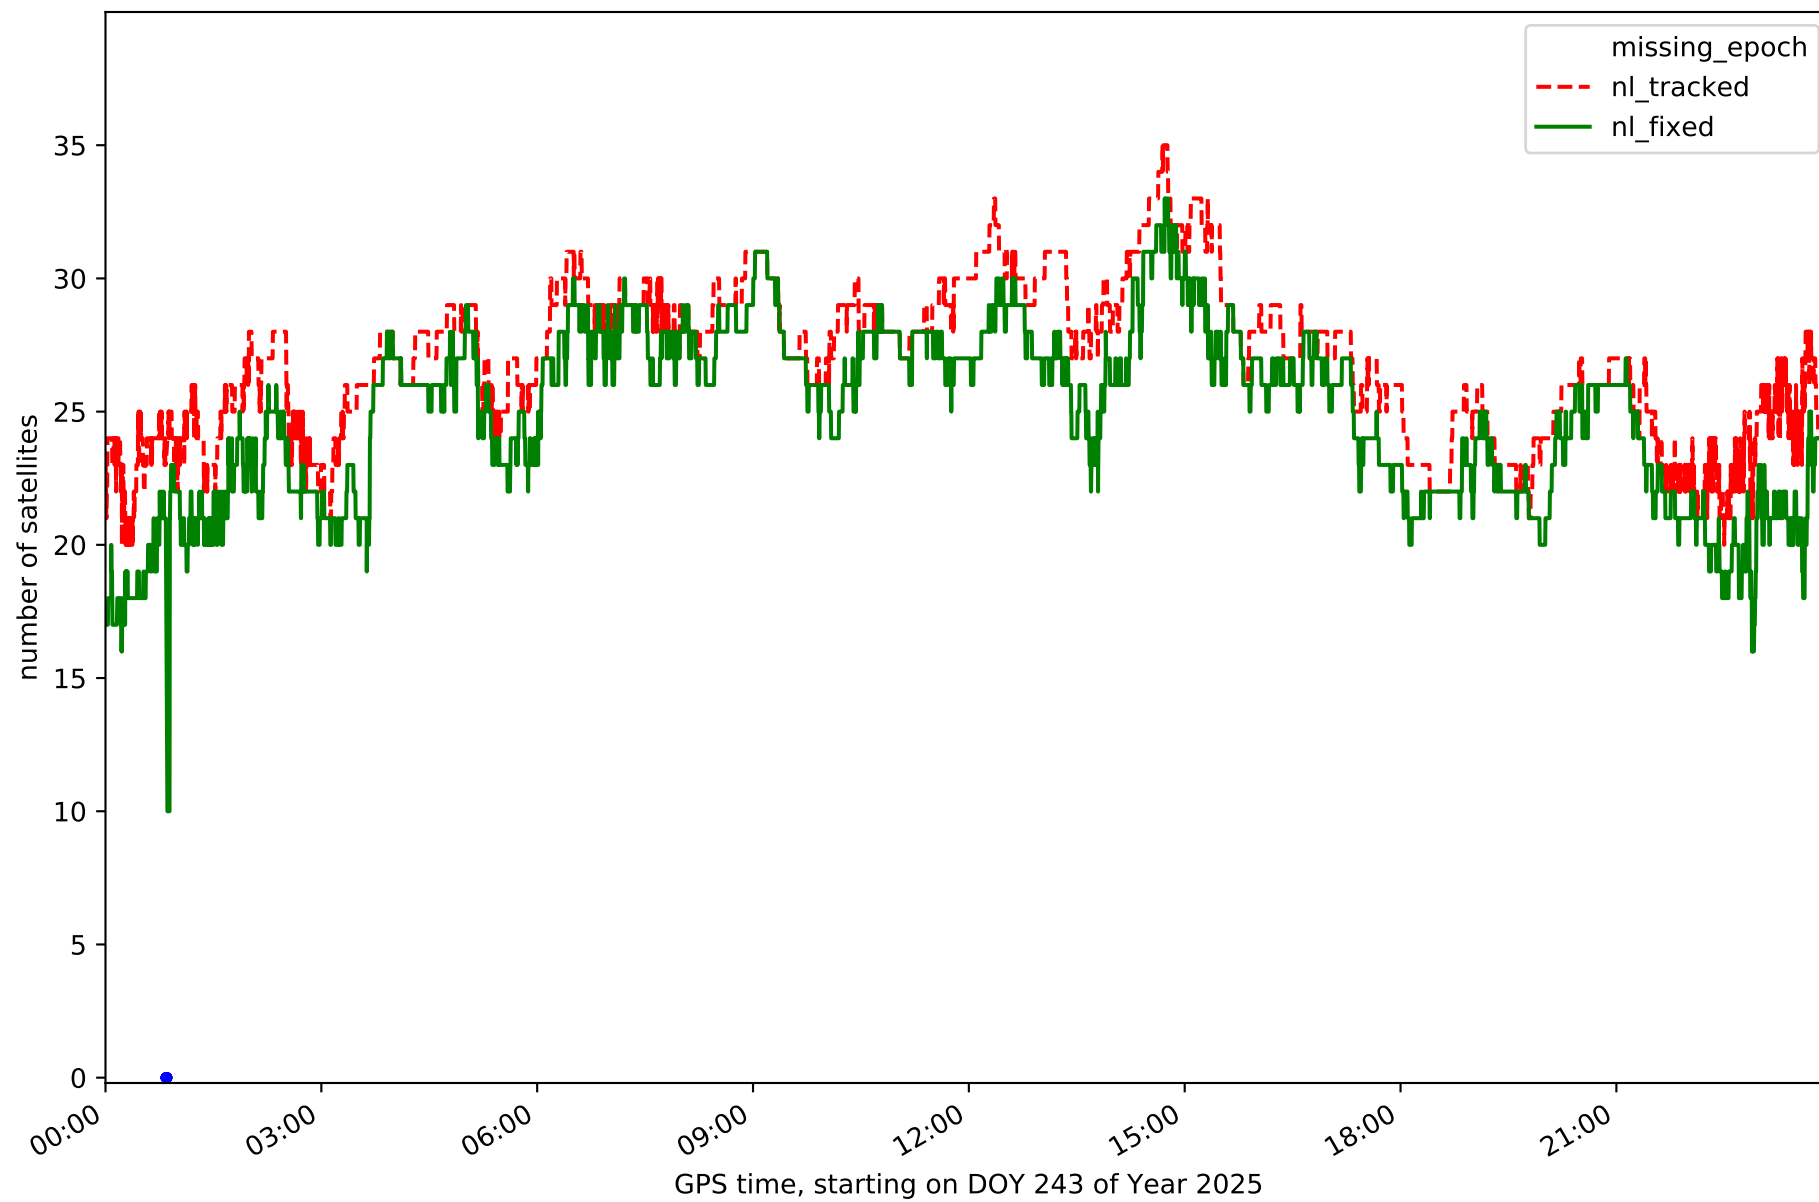


Station TE11 in network NT32

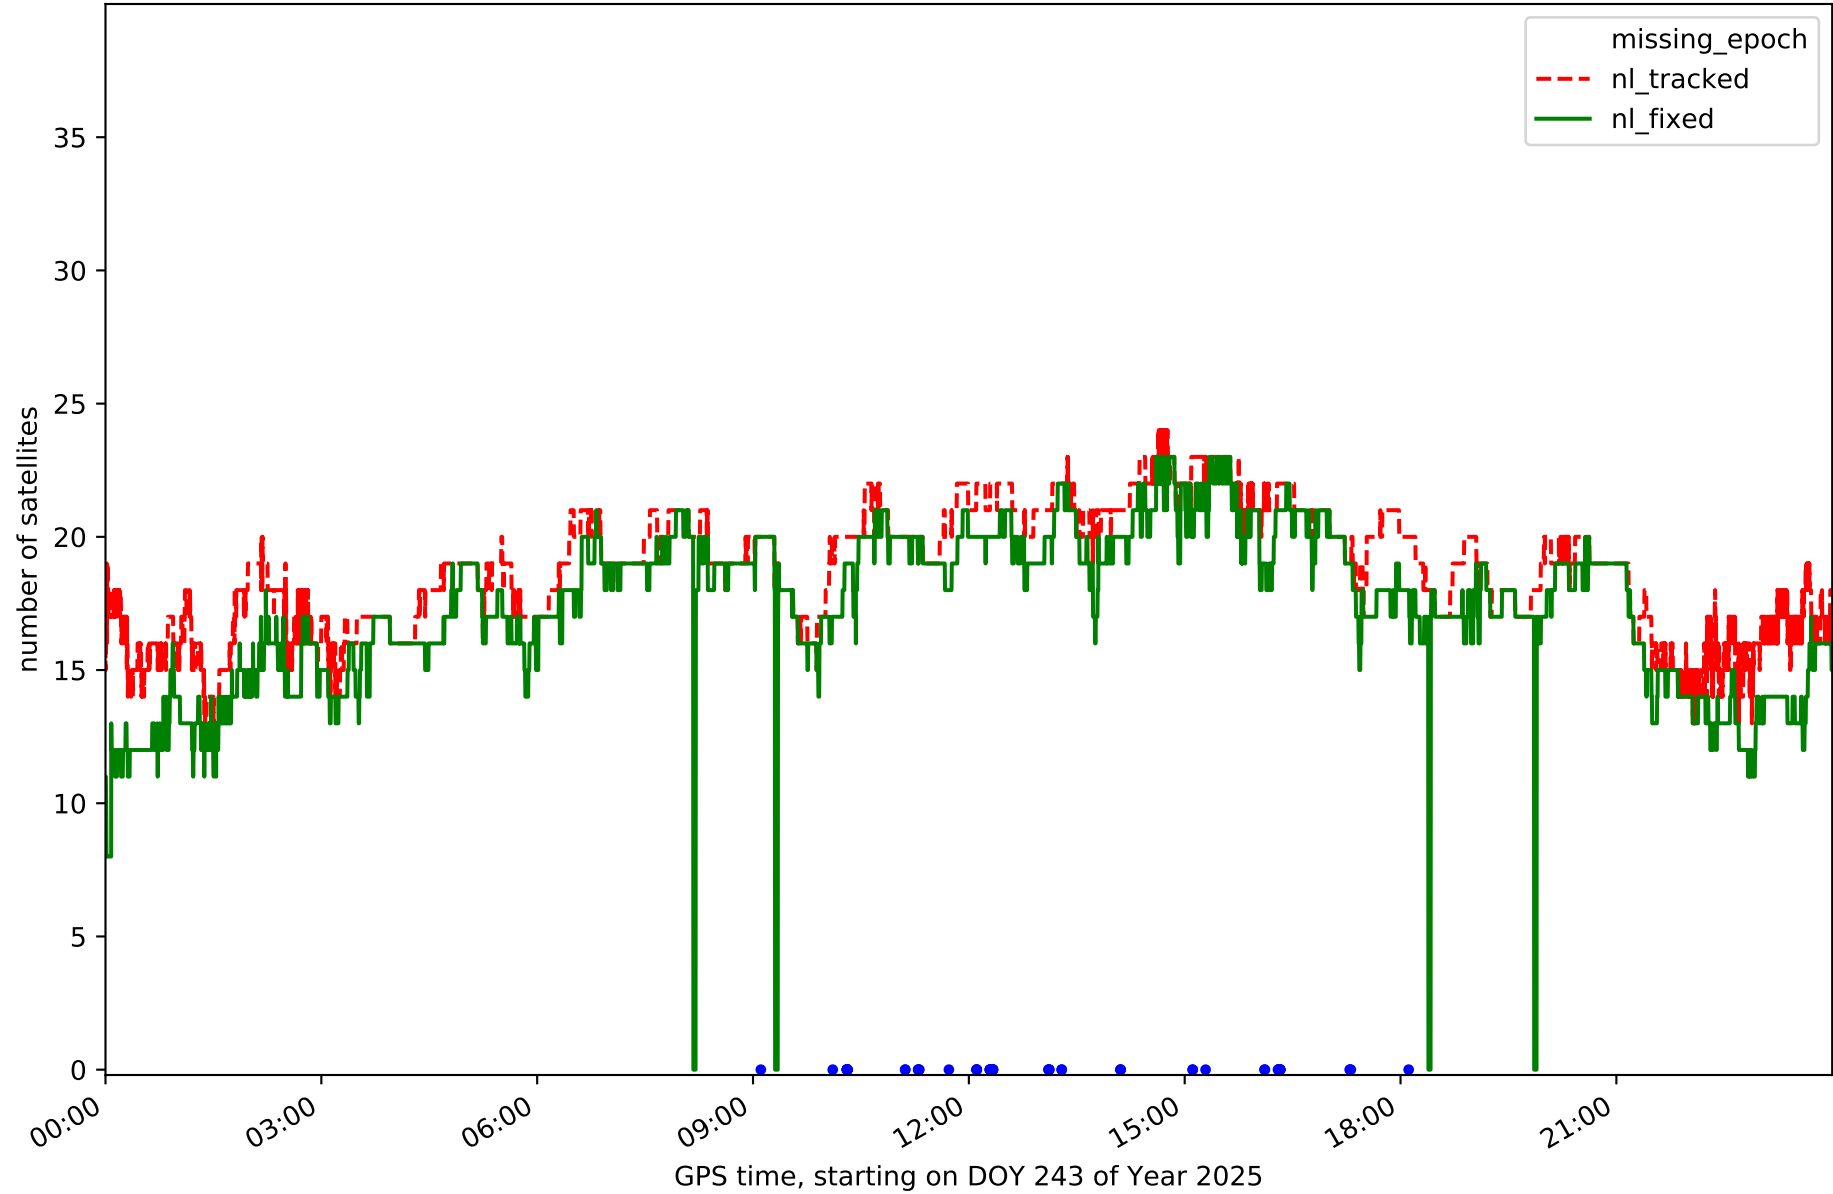


RefCheck for station EH01 in network NT32

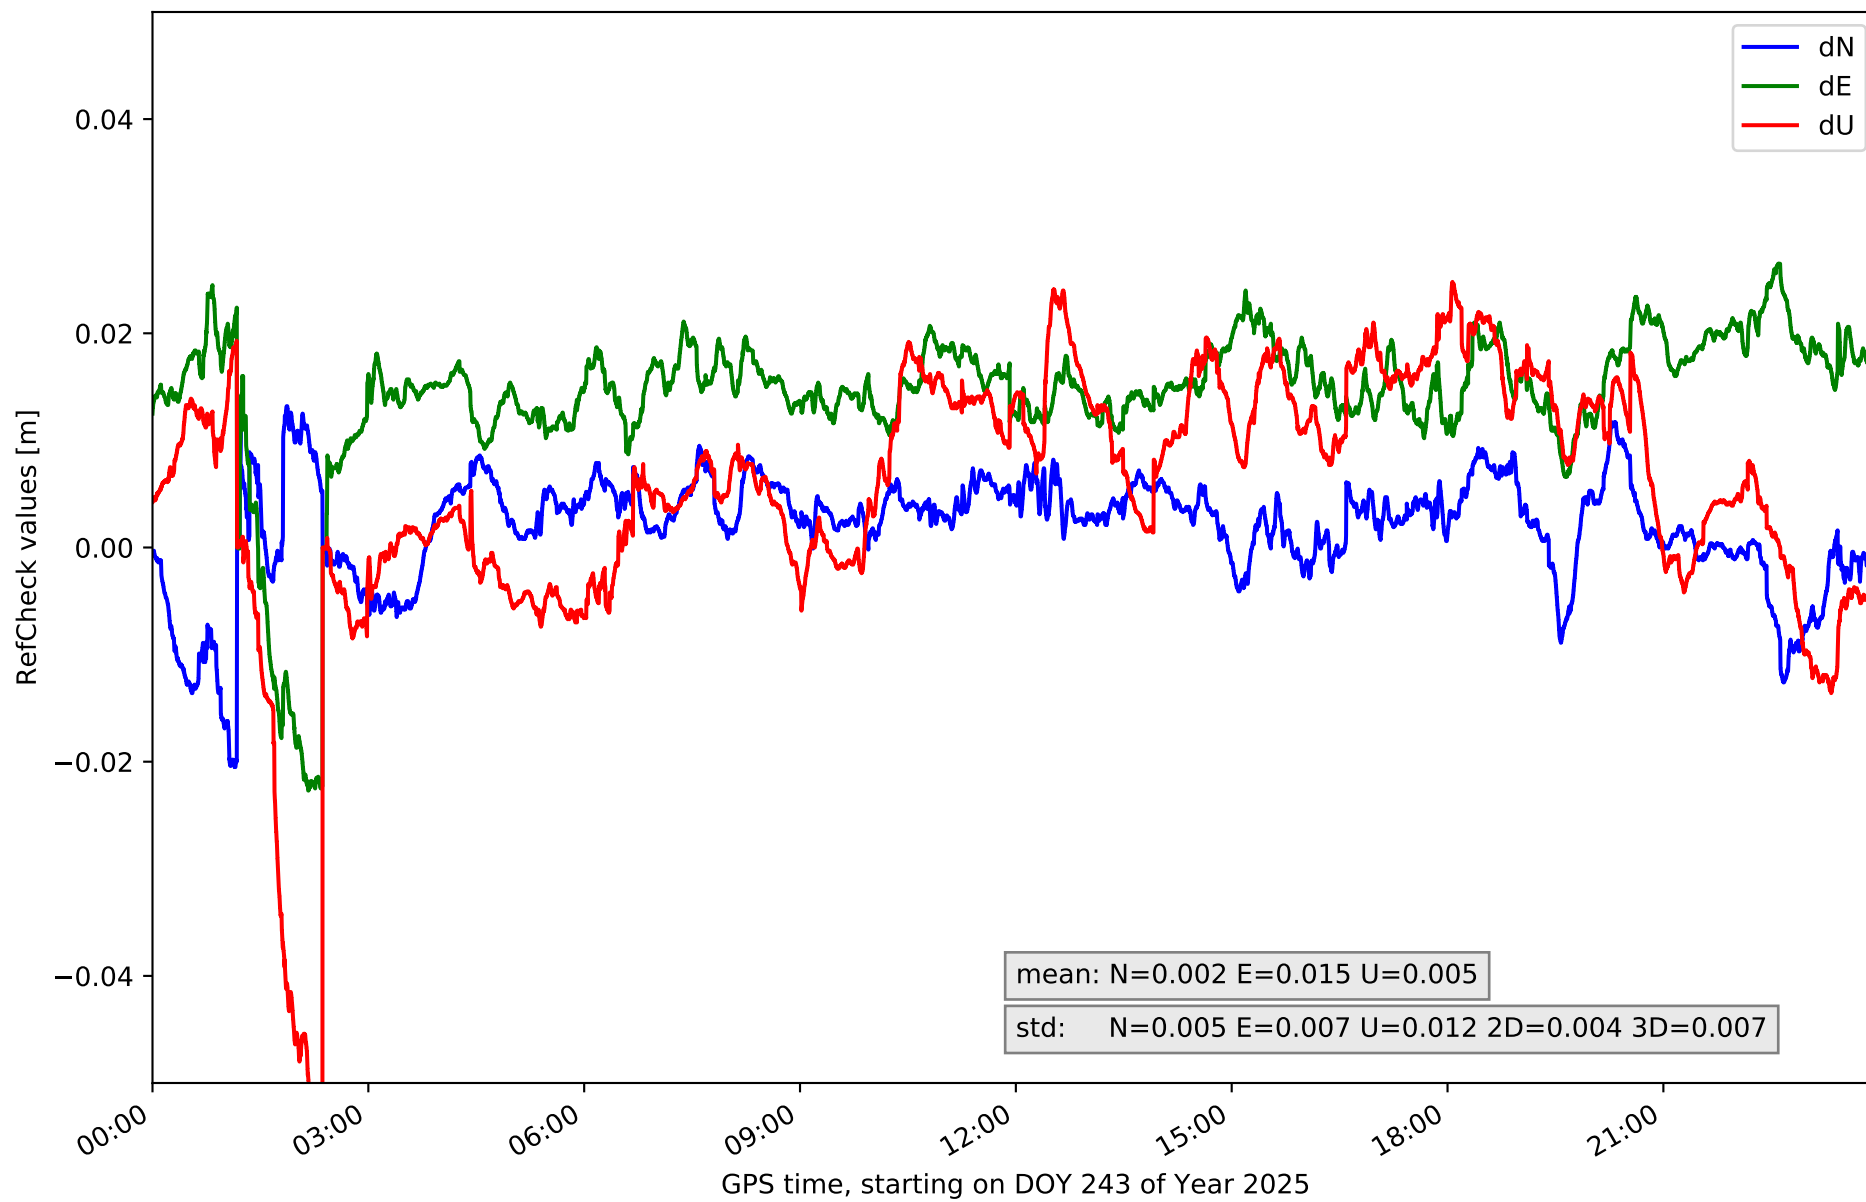


RefCheck for station EH02 in network NT32

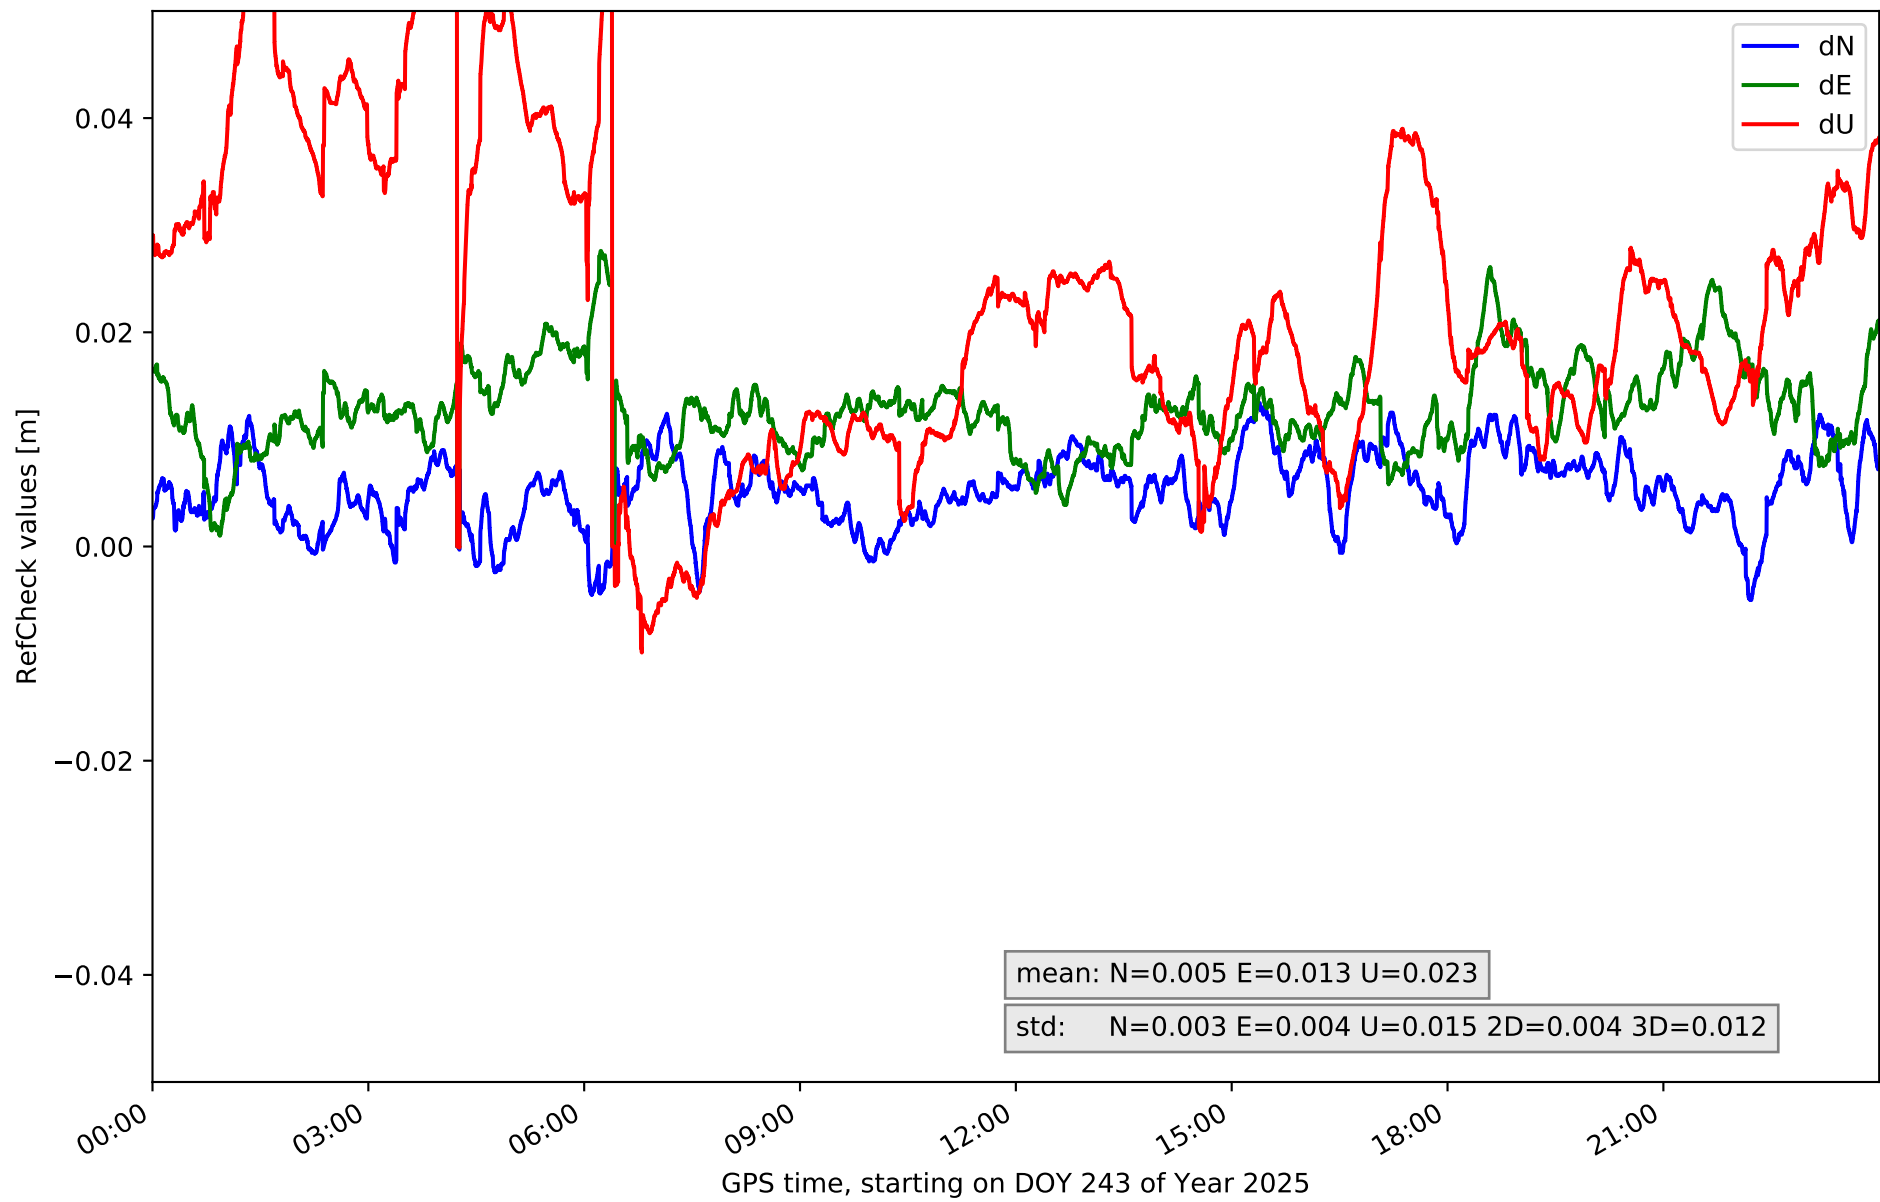


RefCheck for station GOM1 in network NT32

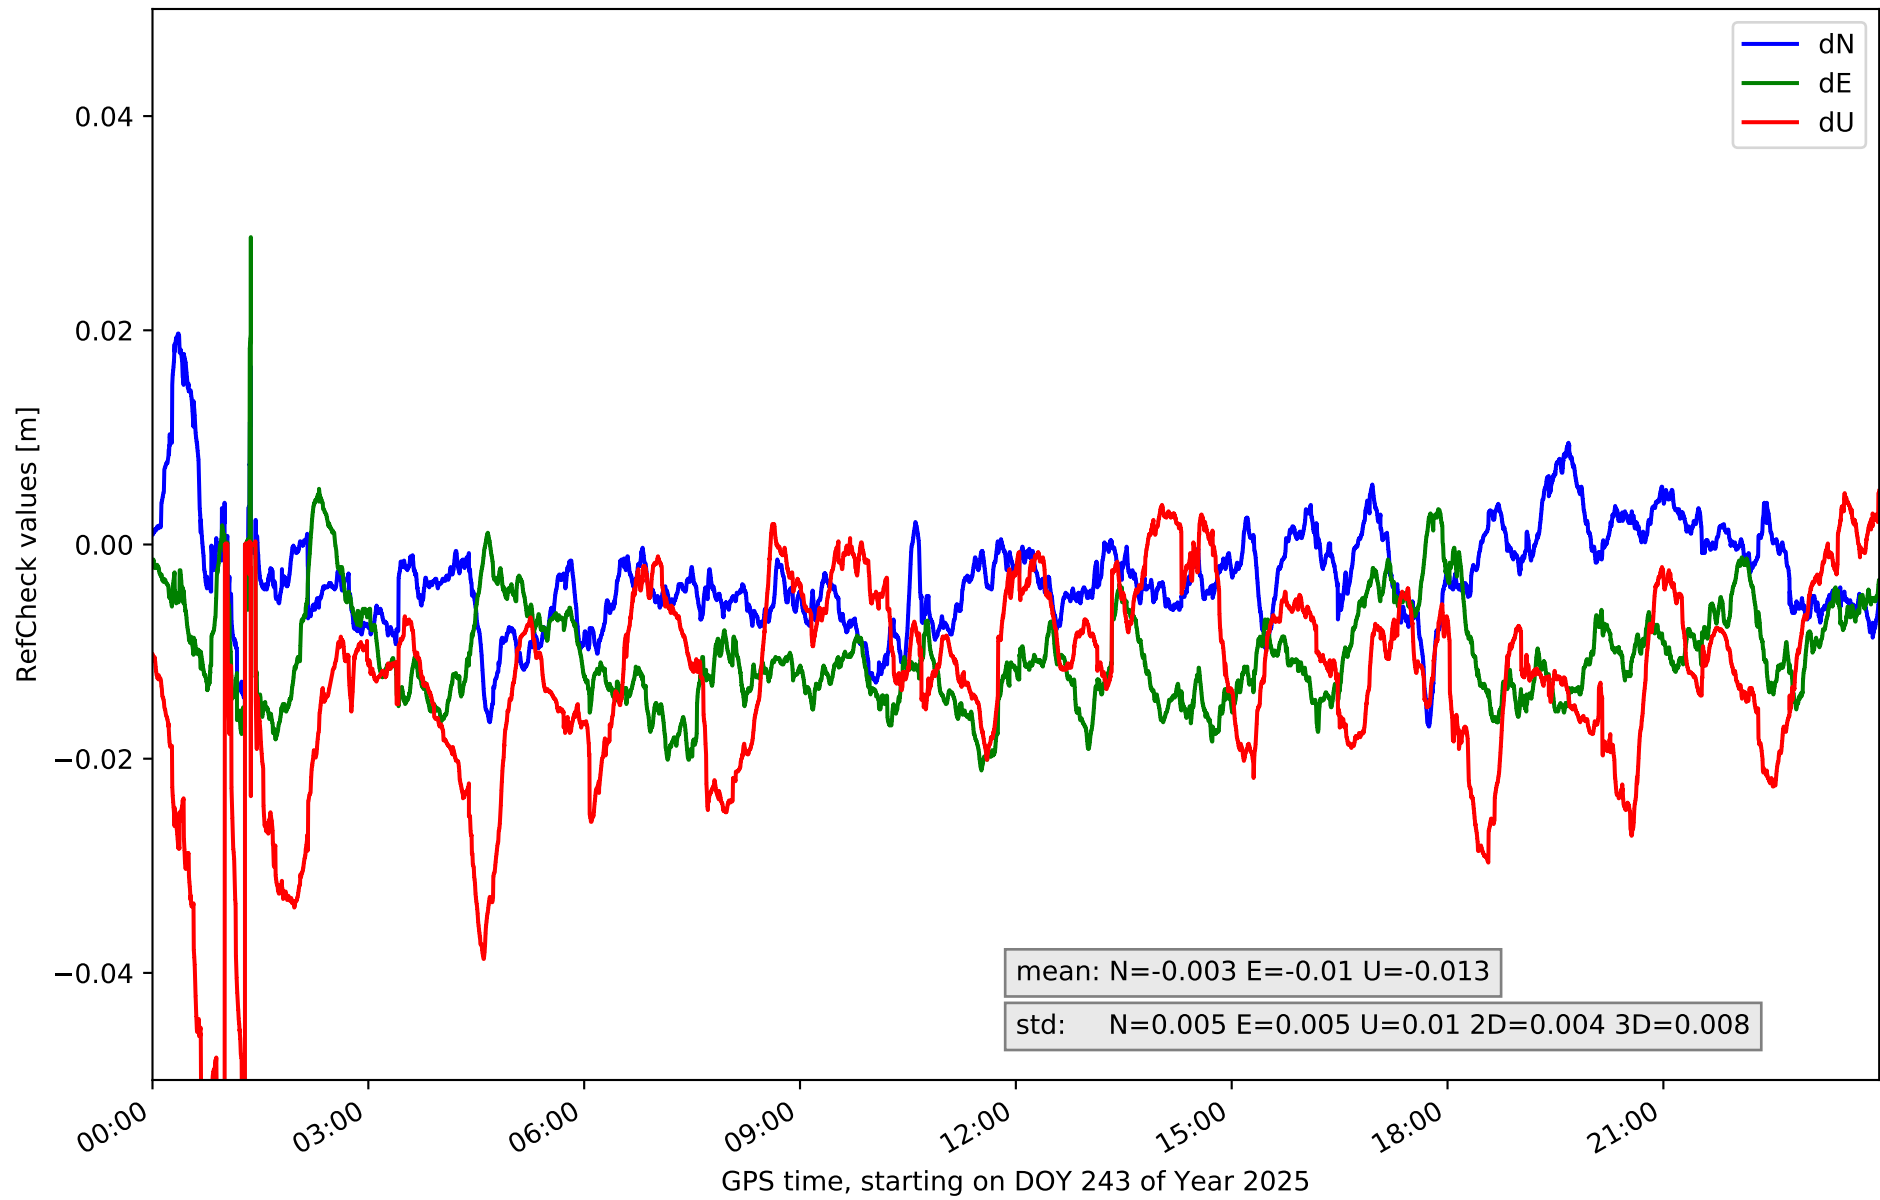


RefCheck for station IZAN in network NT32

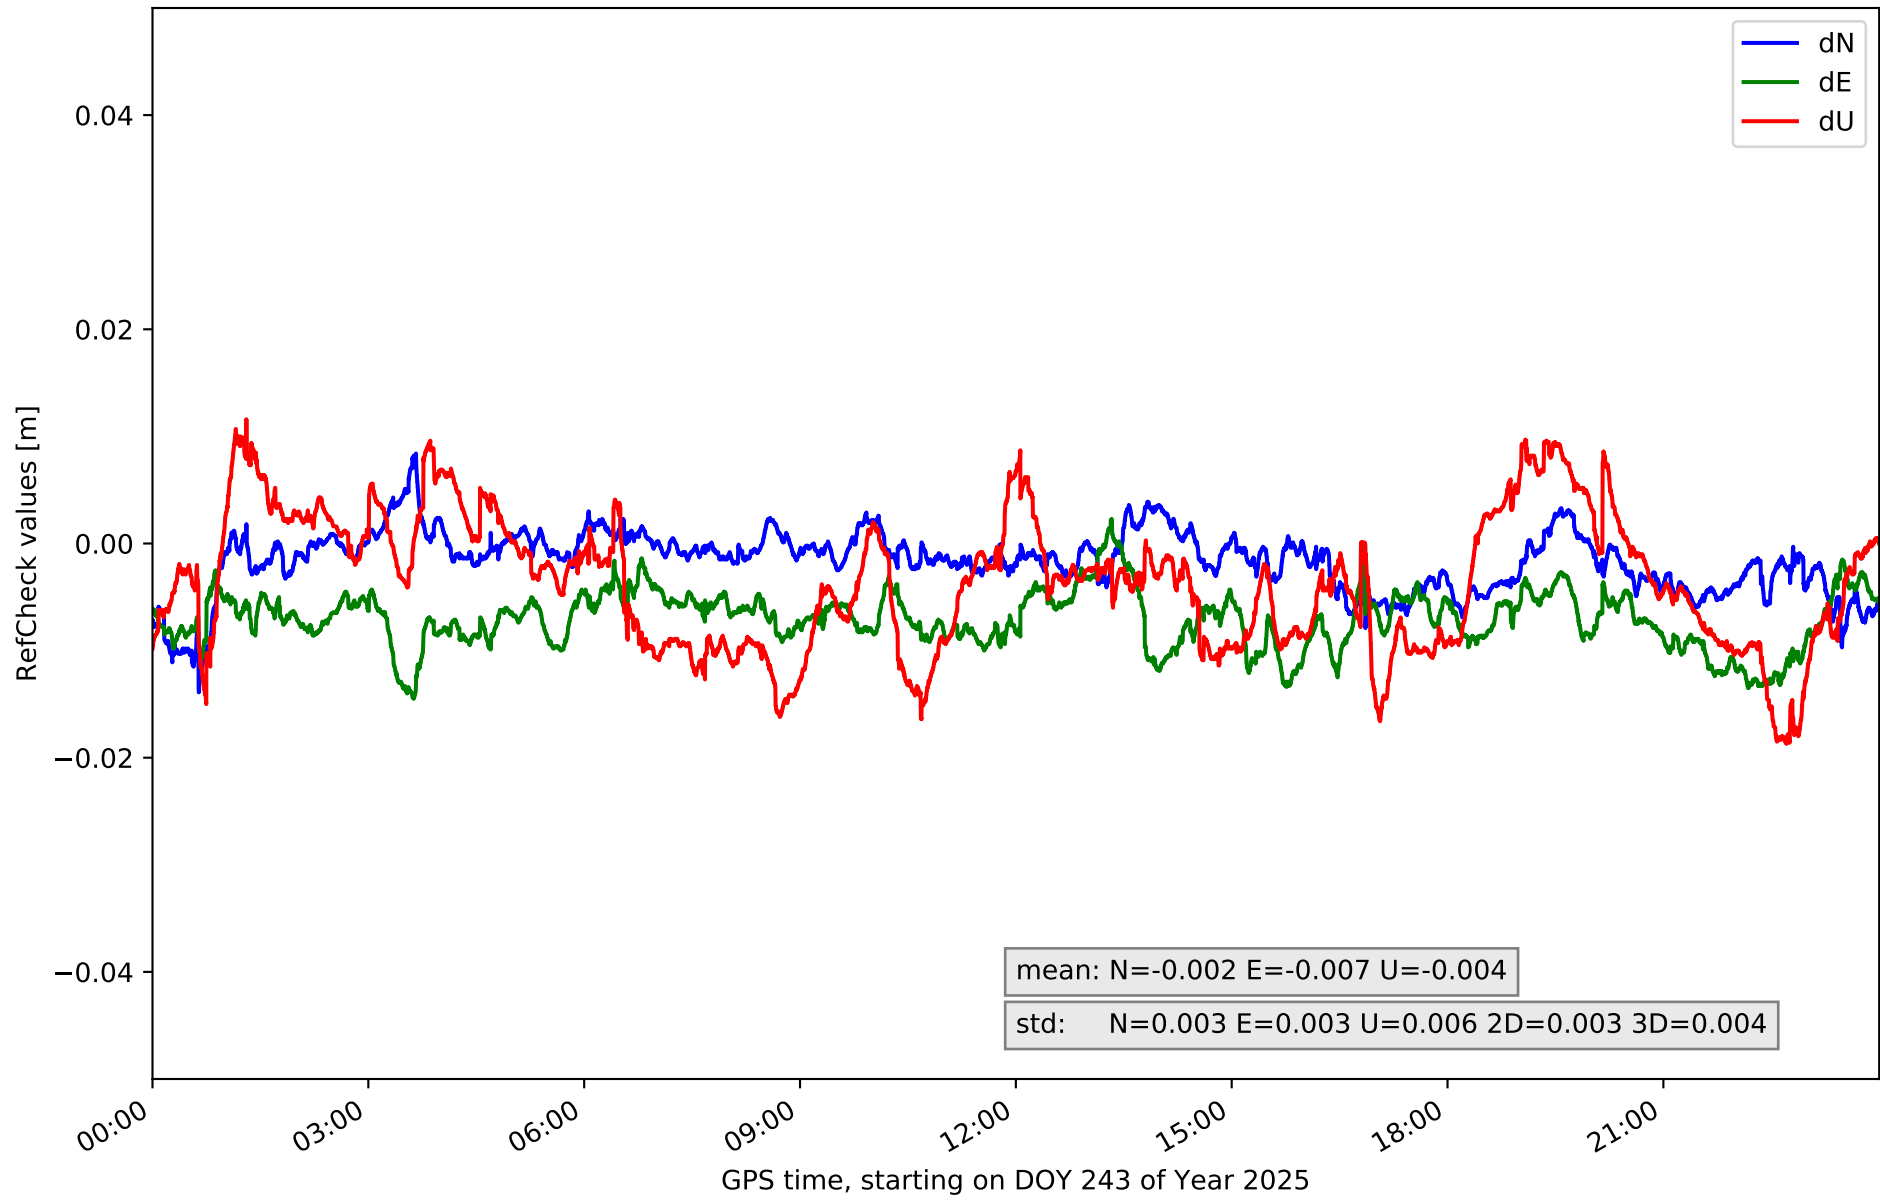


RefCheck for station LP01 in network NT32

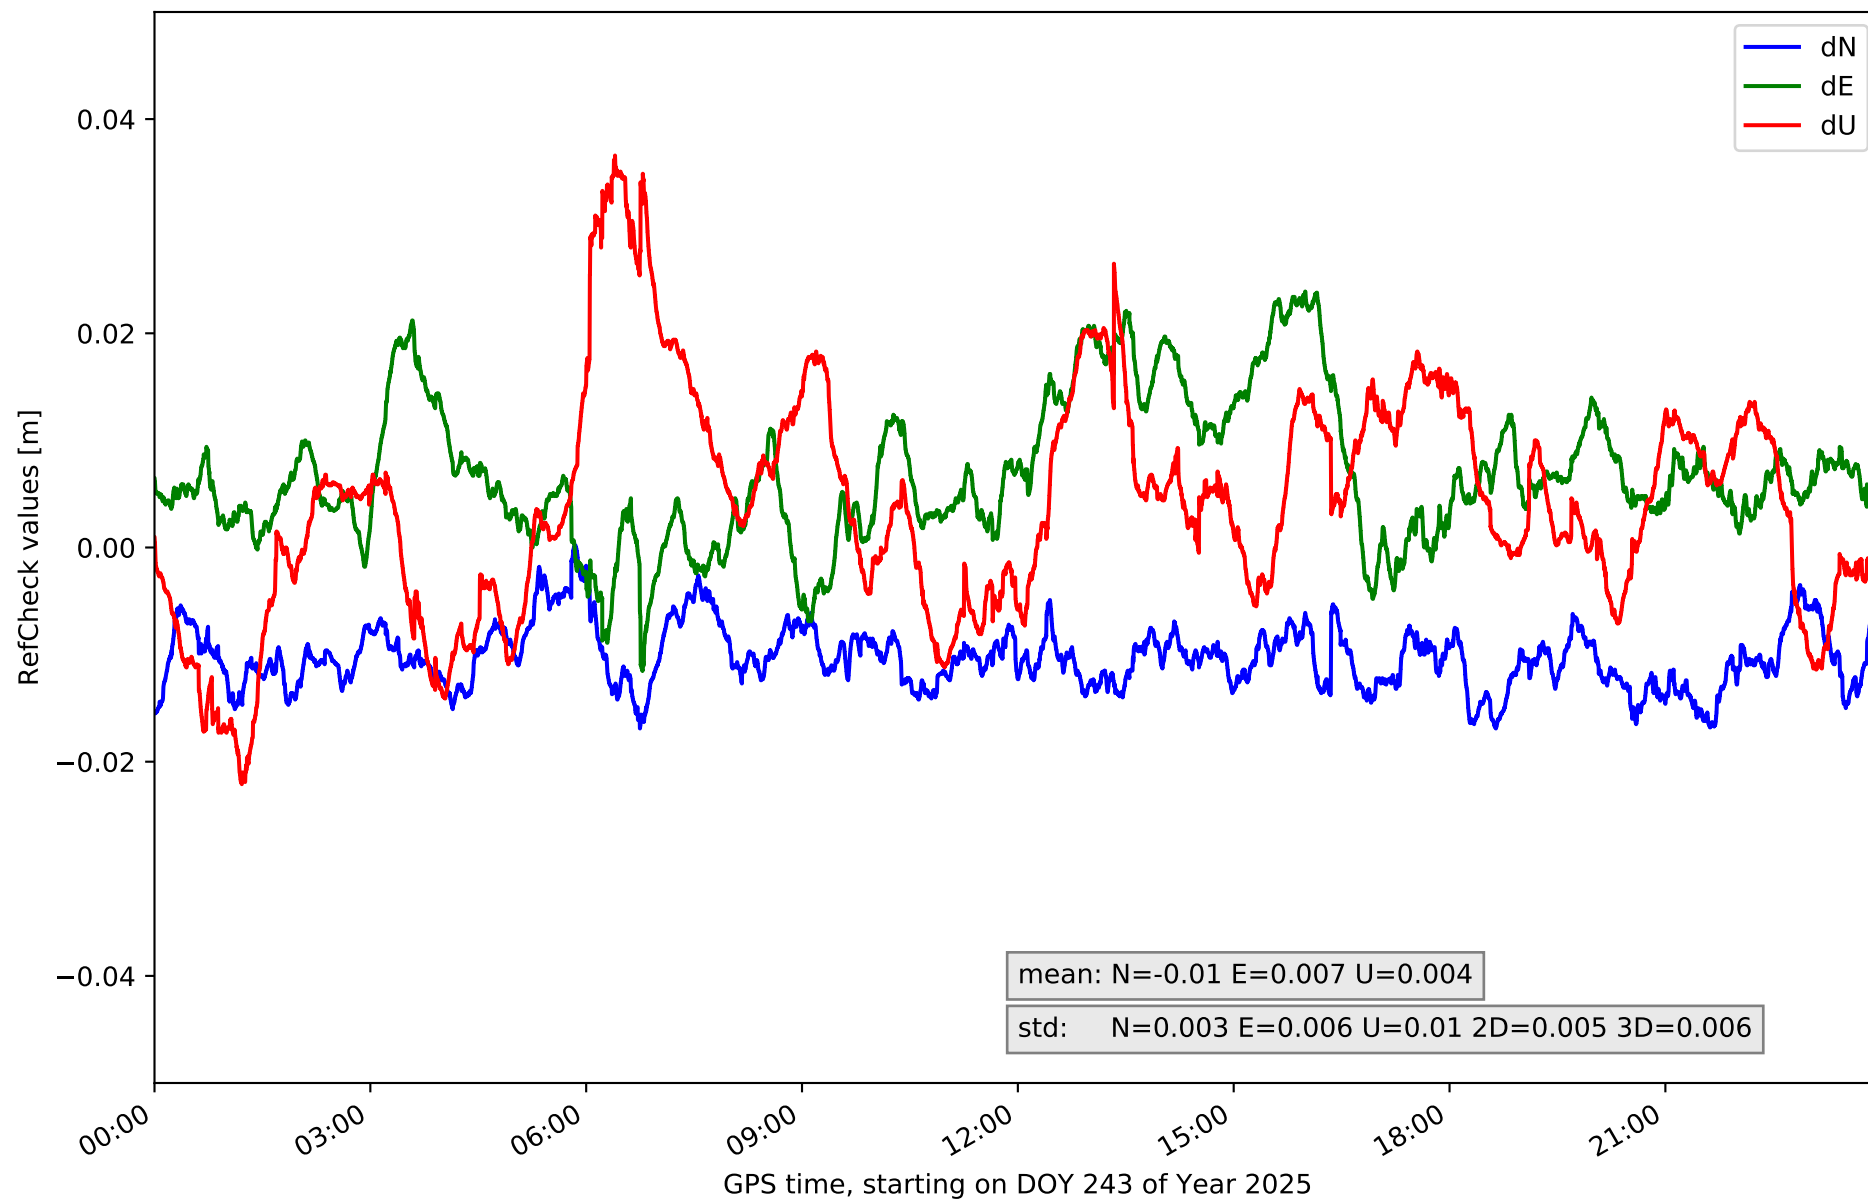


RefCheck for station LP03 in network NT32

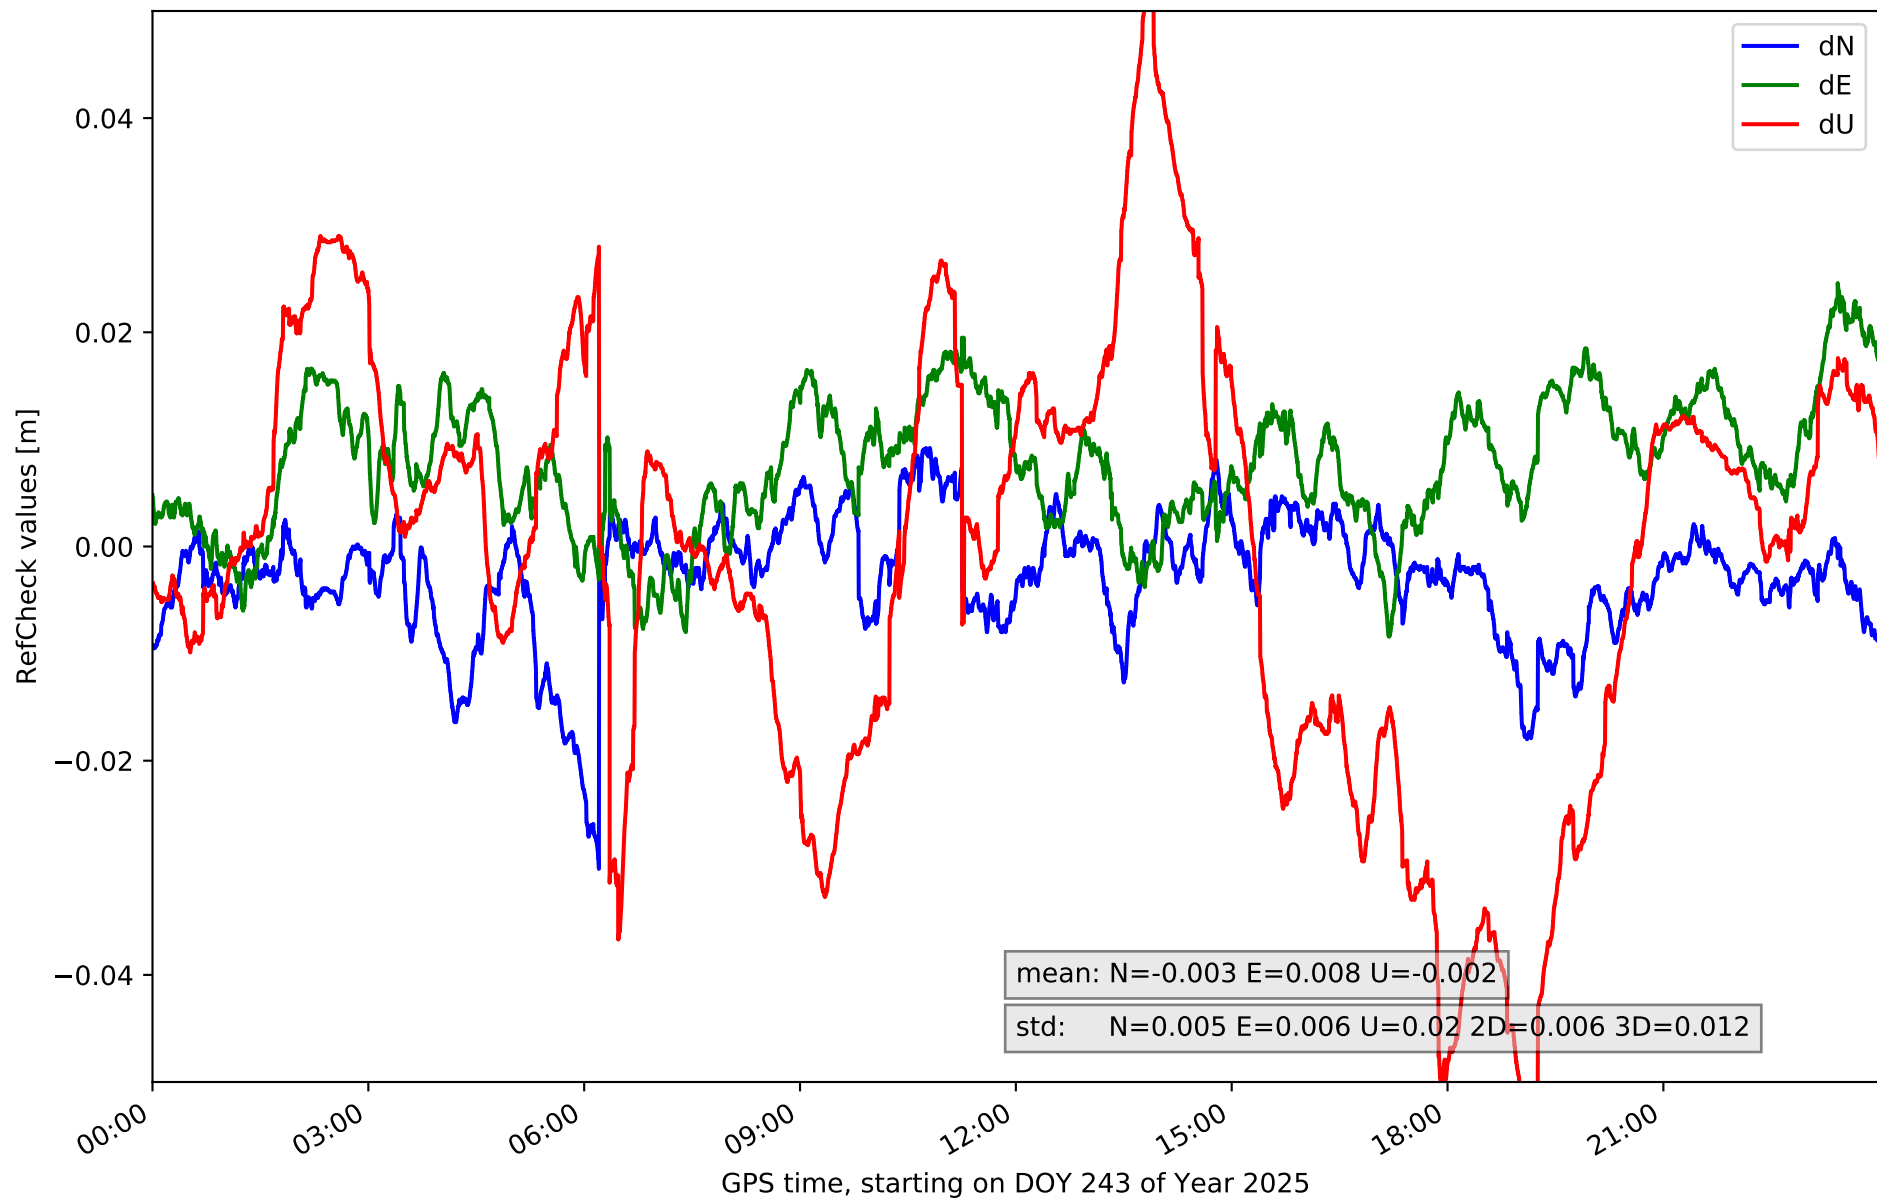


RefCheck for station LPAL in network NT32

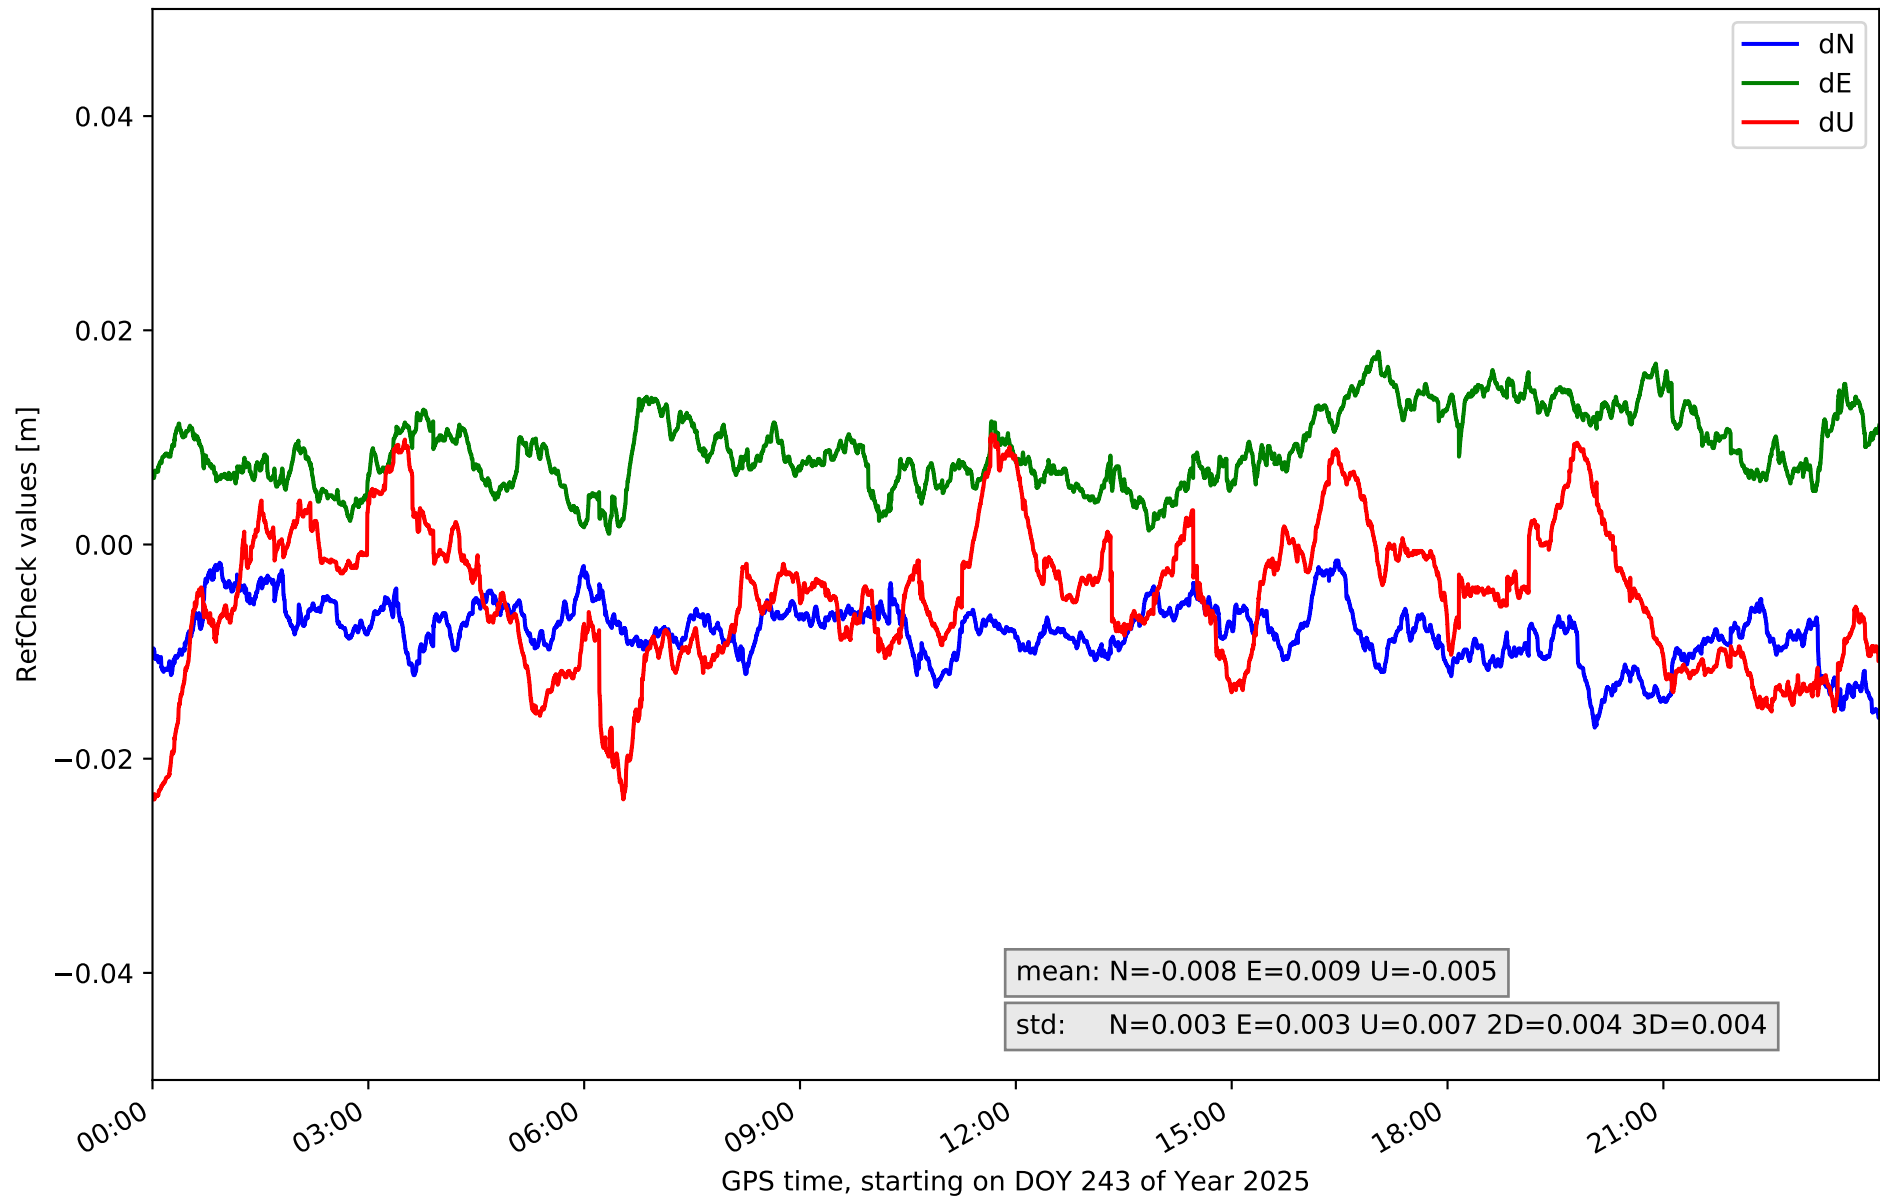


RefCheck for station LRES in network NT32

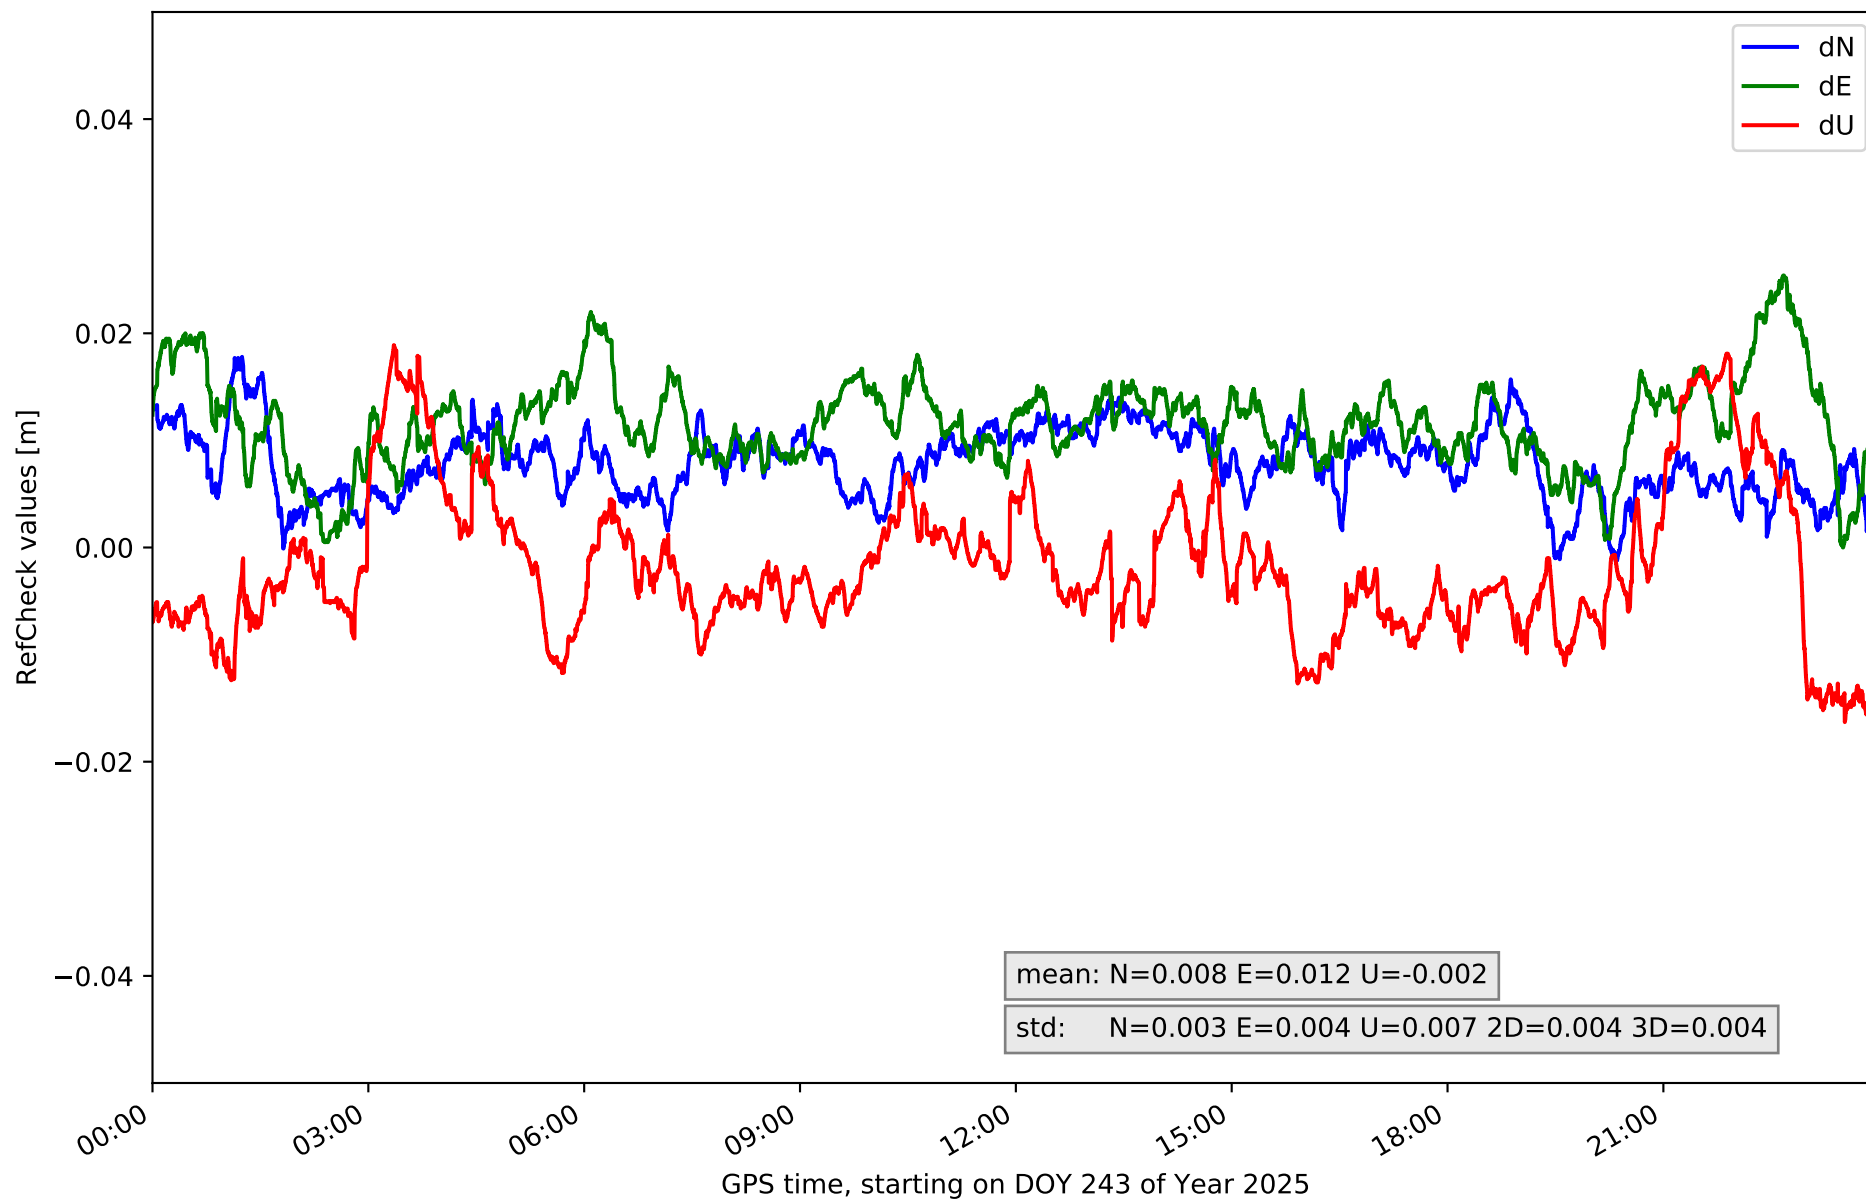


RefCheck for station TN01 in network NT32

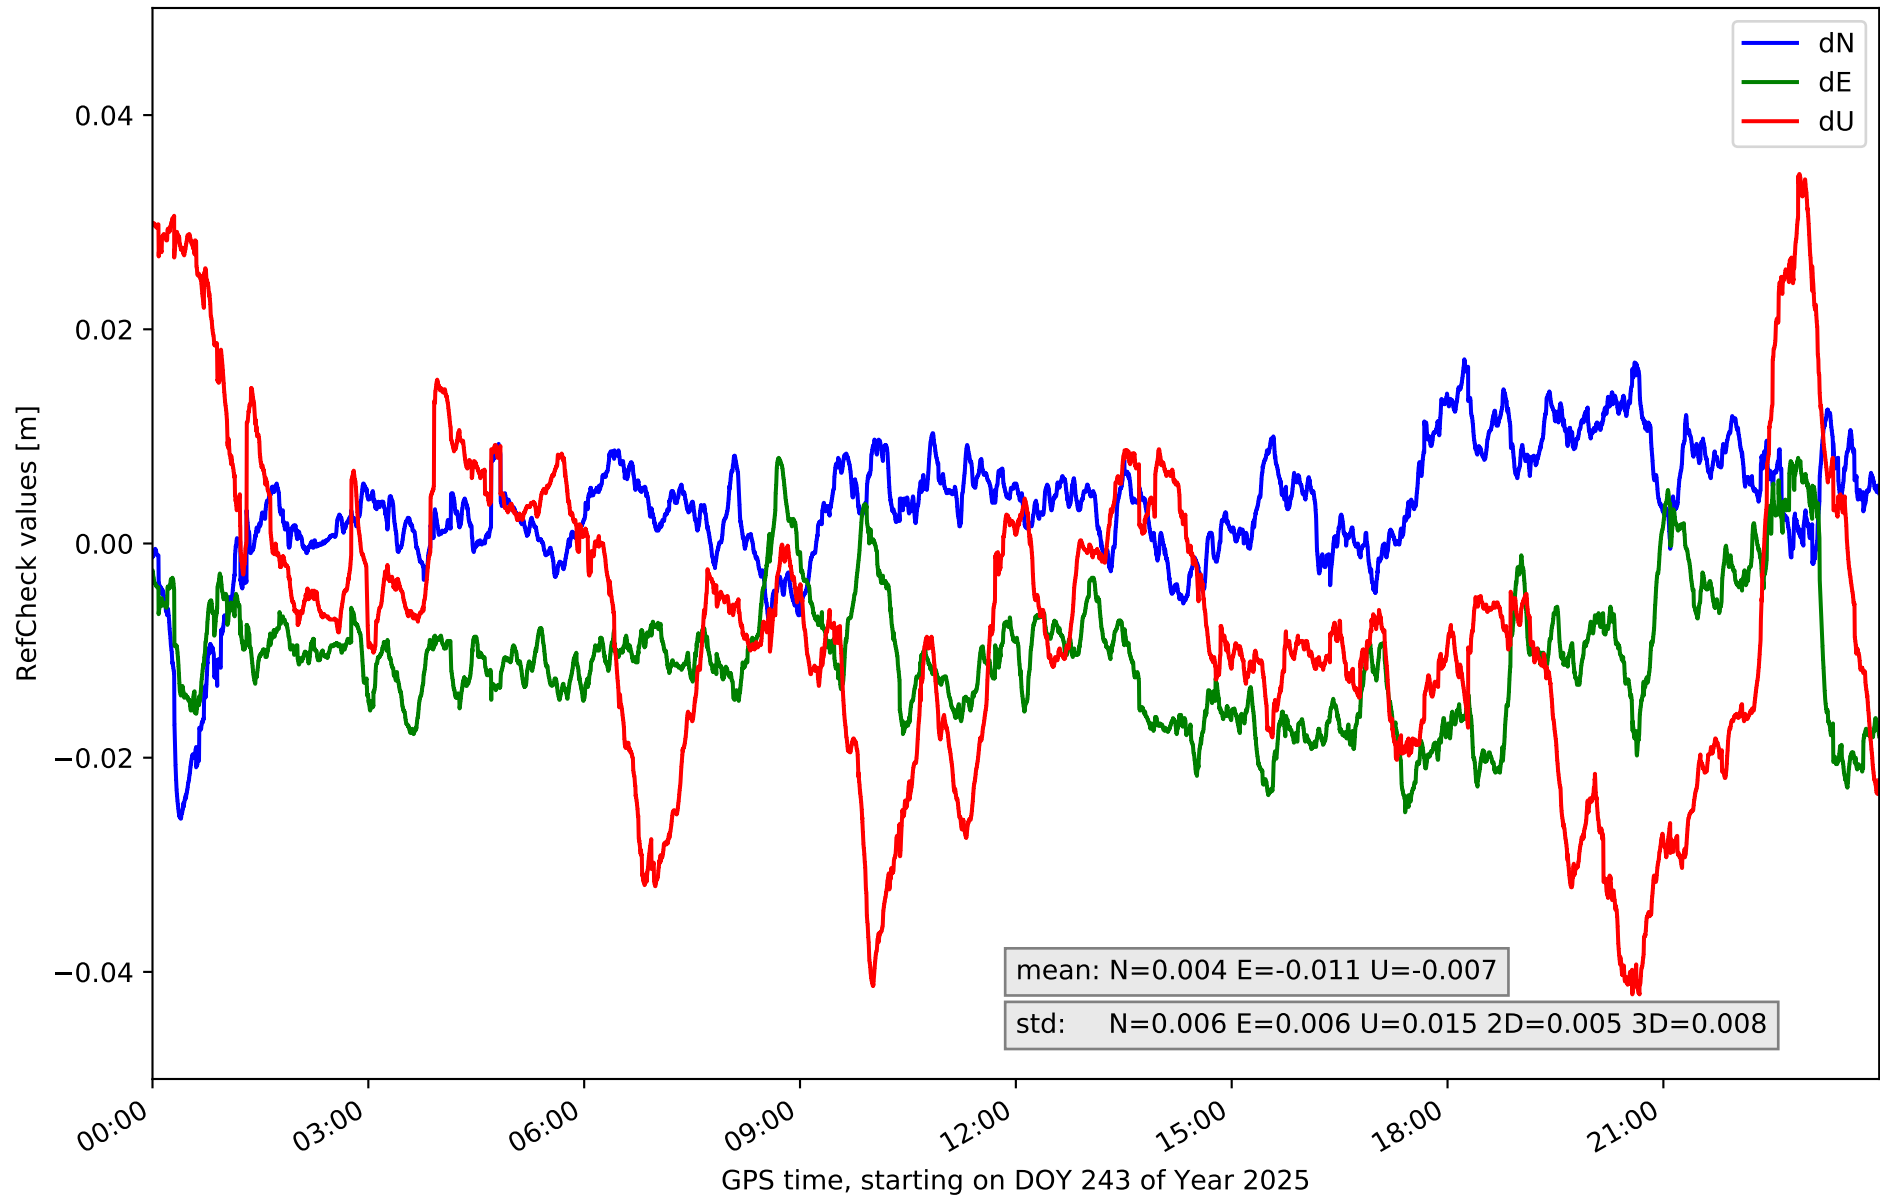


RefCheck for station TN02 in network NT32

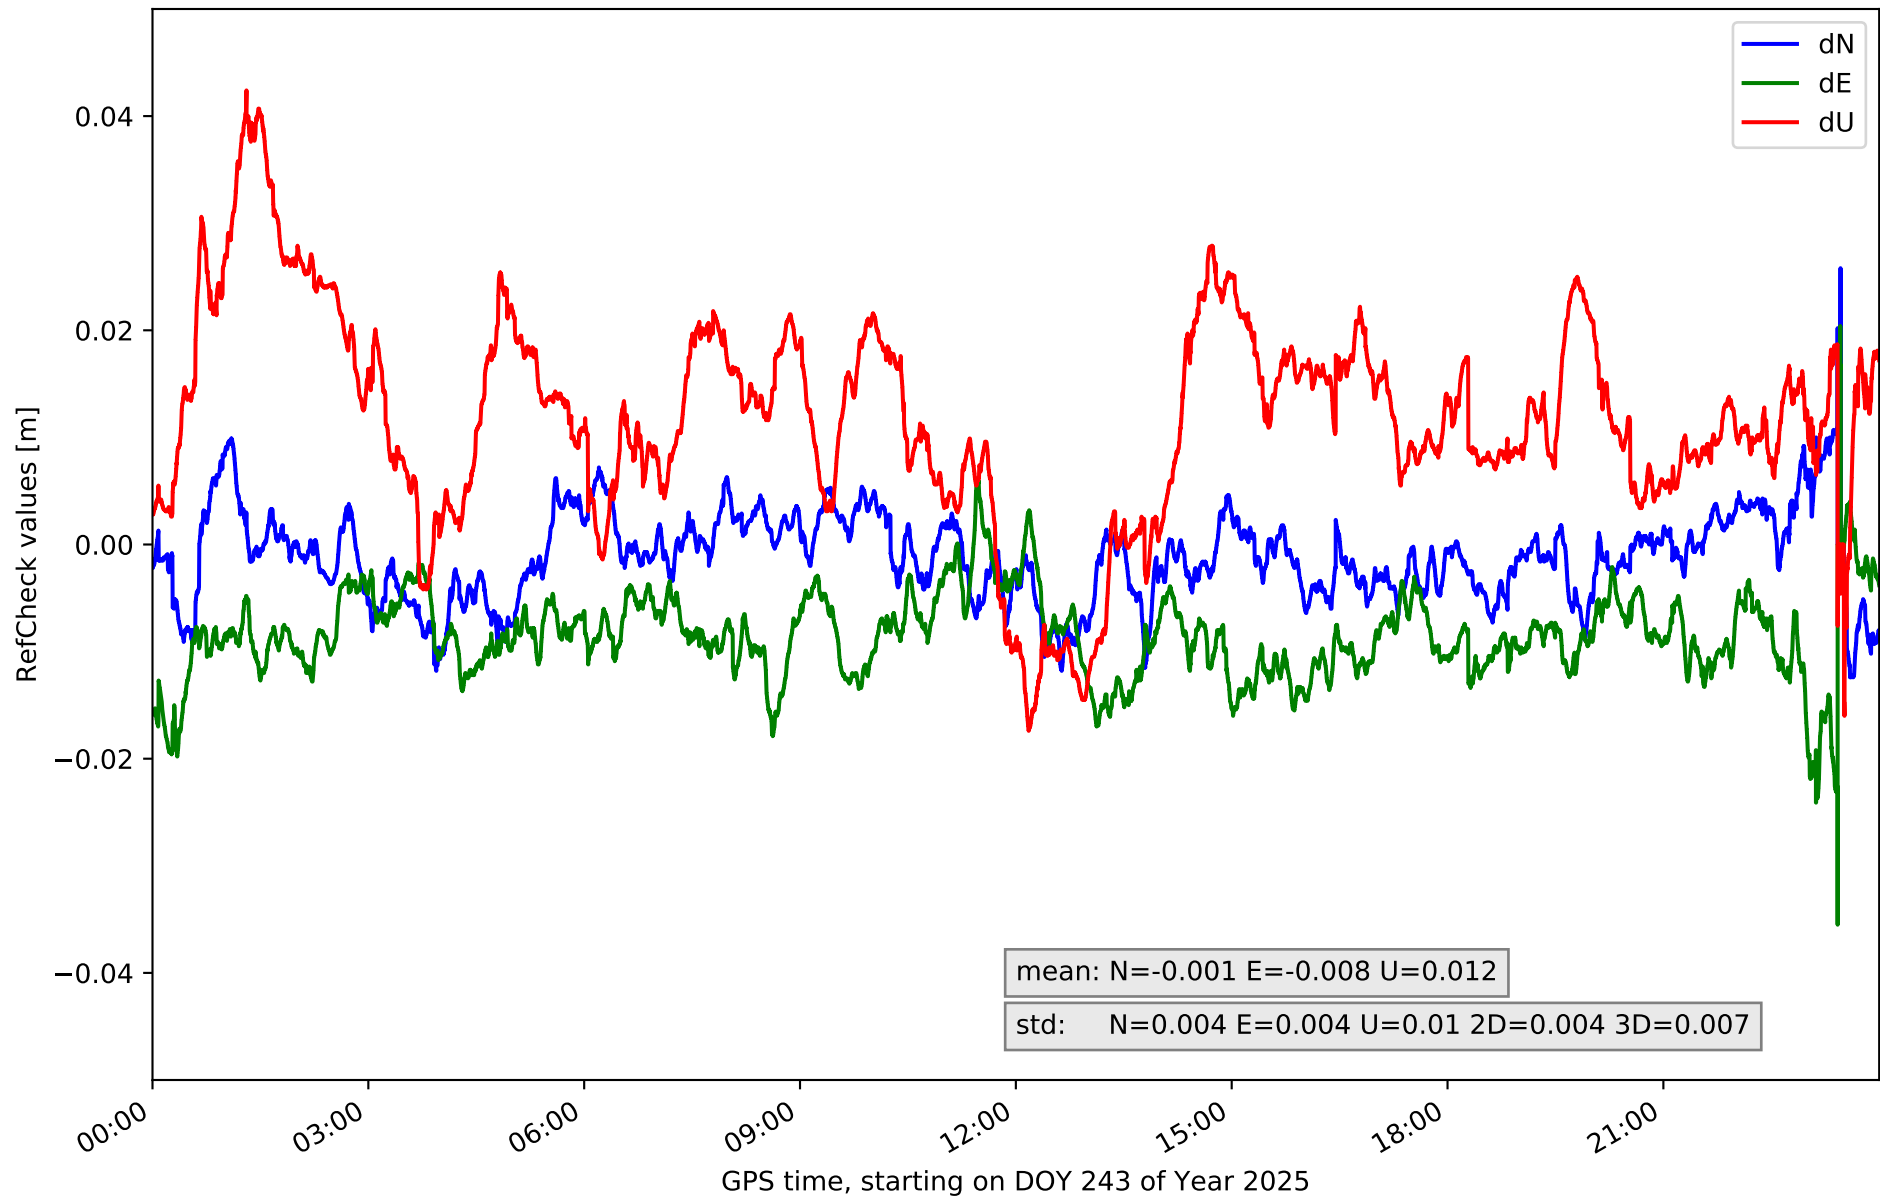


RefCheck for station TN03 in network NT32

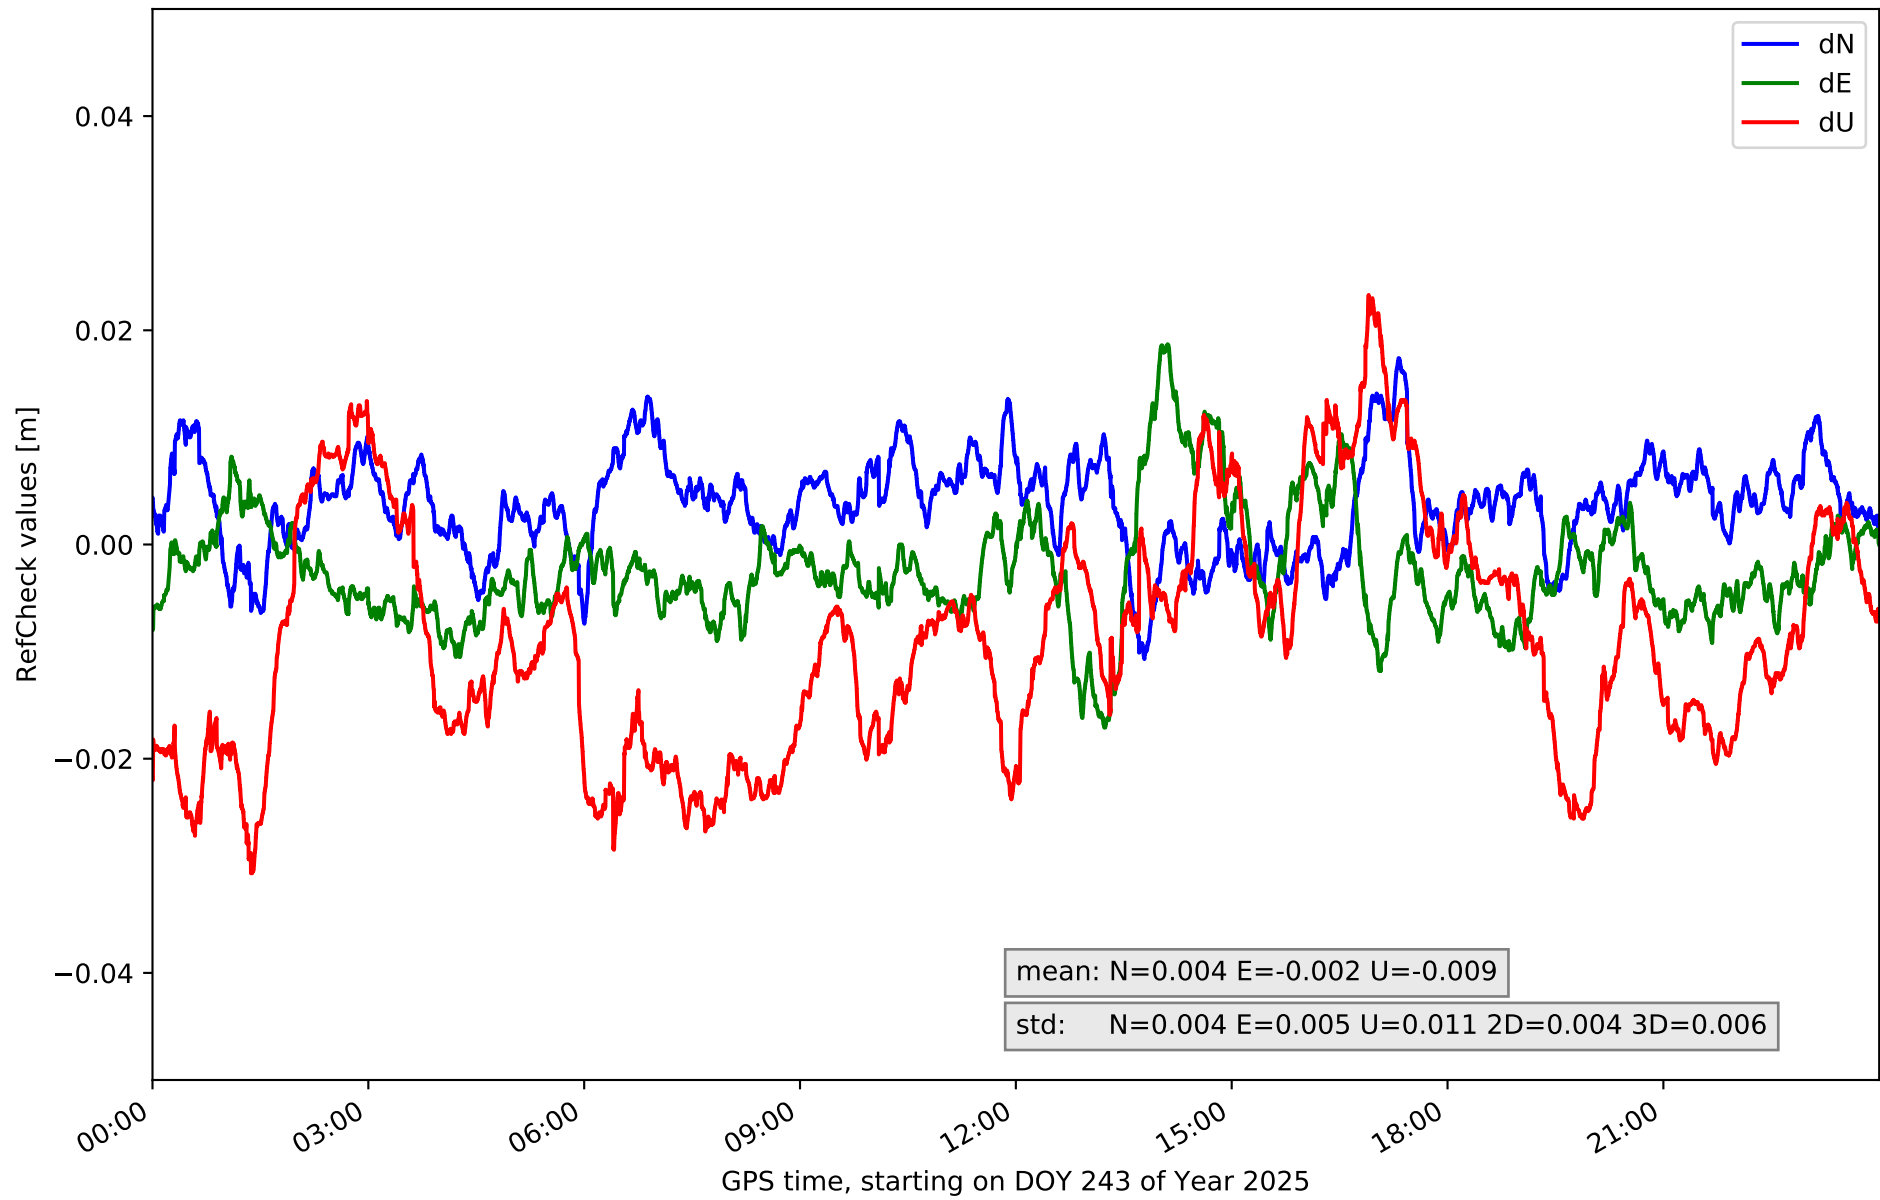


RefCheck for station TN04 in network NT32

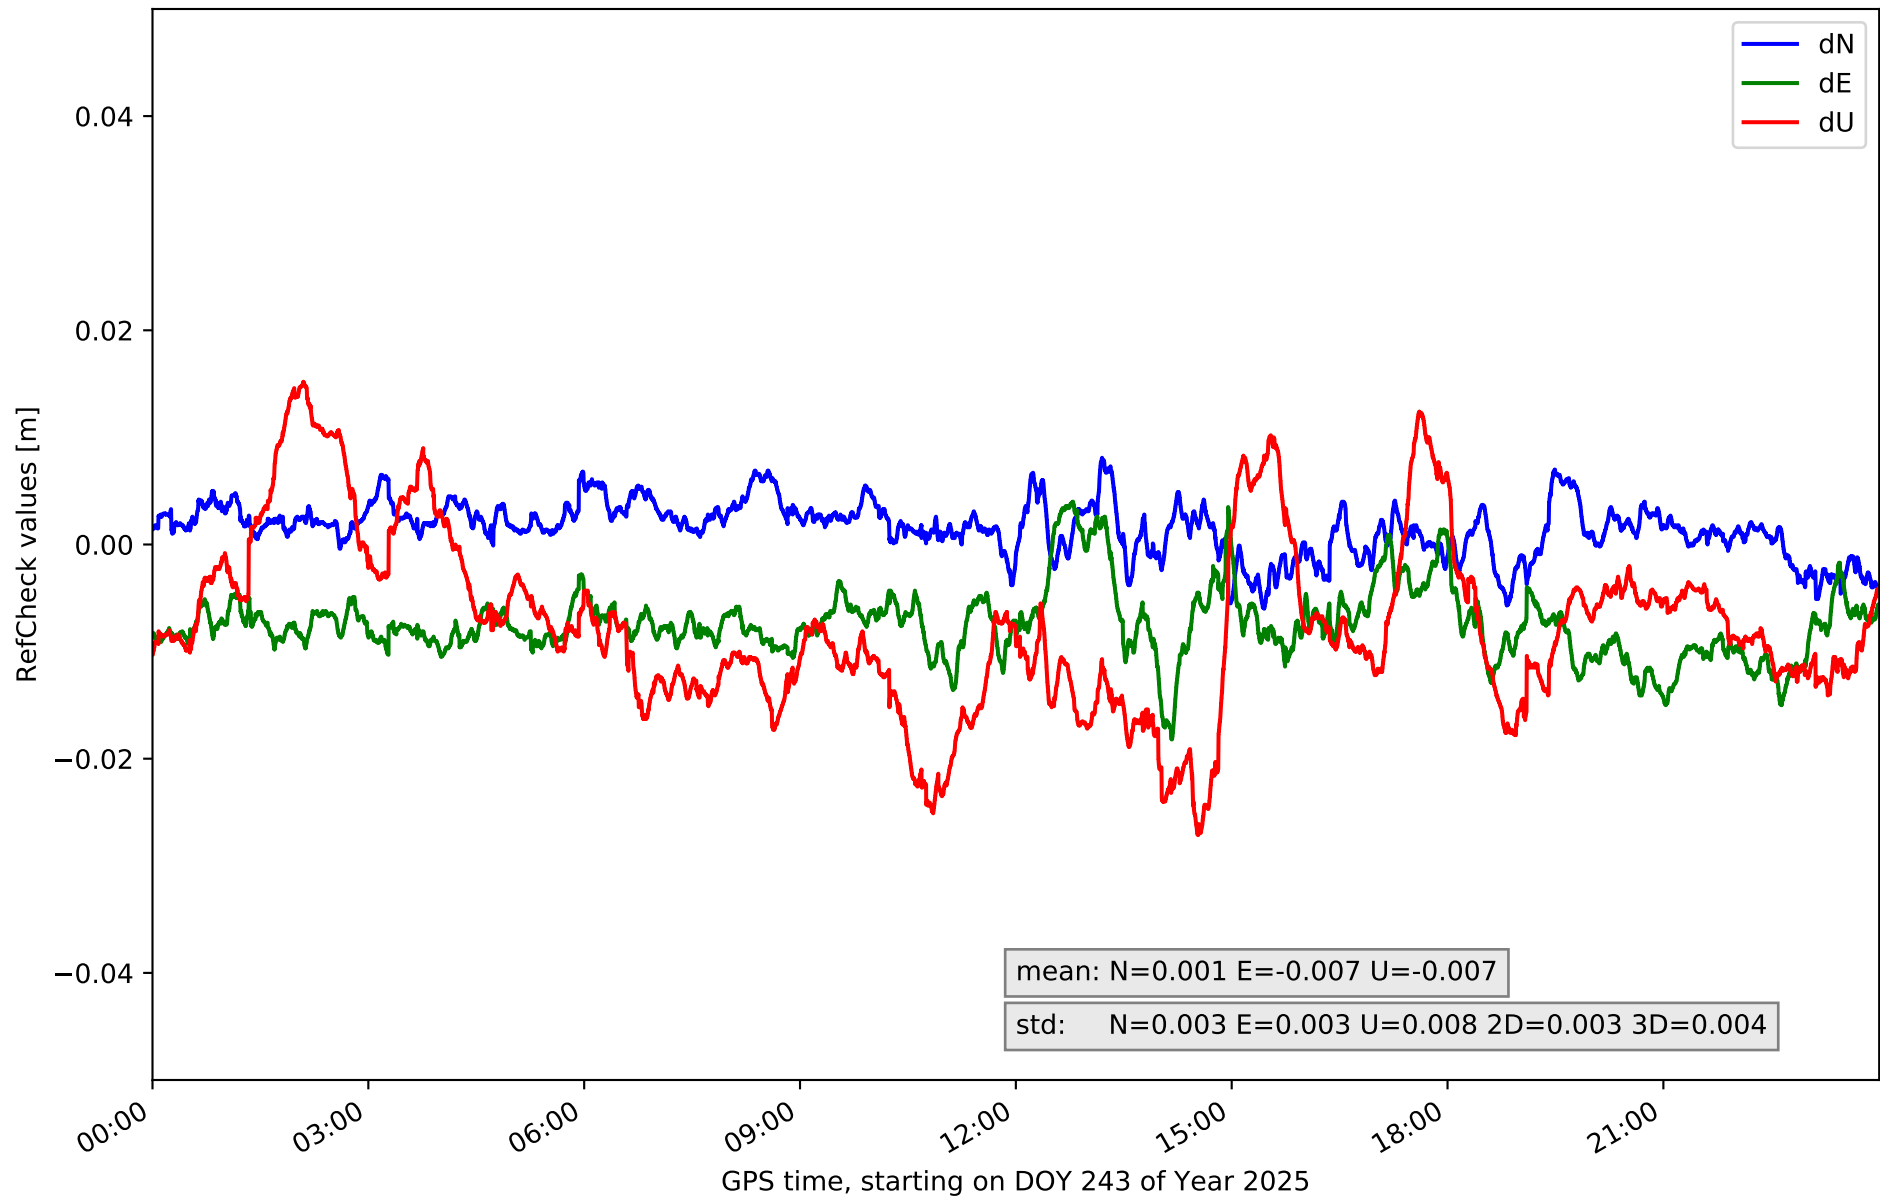


RefCheck for station TN06 in network NT32

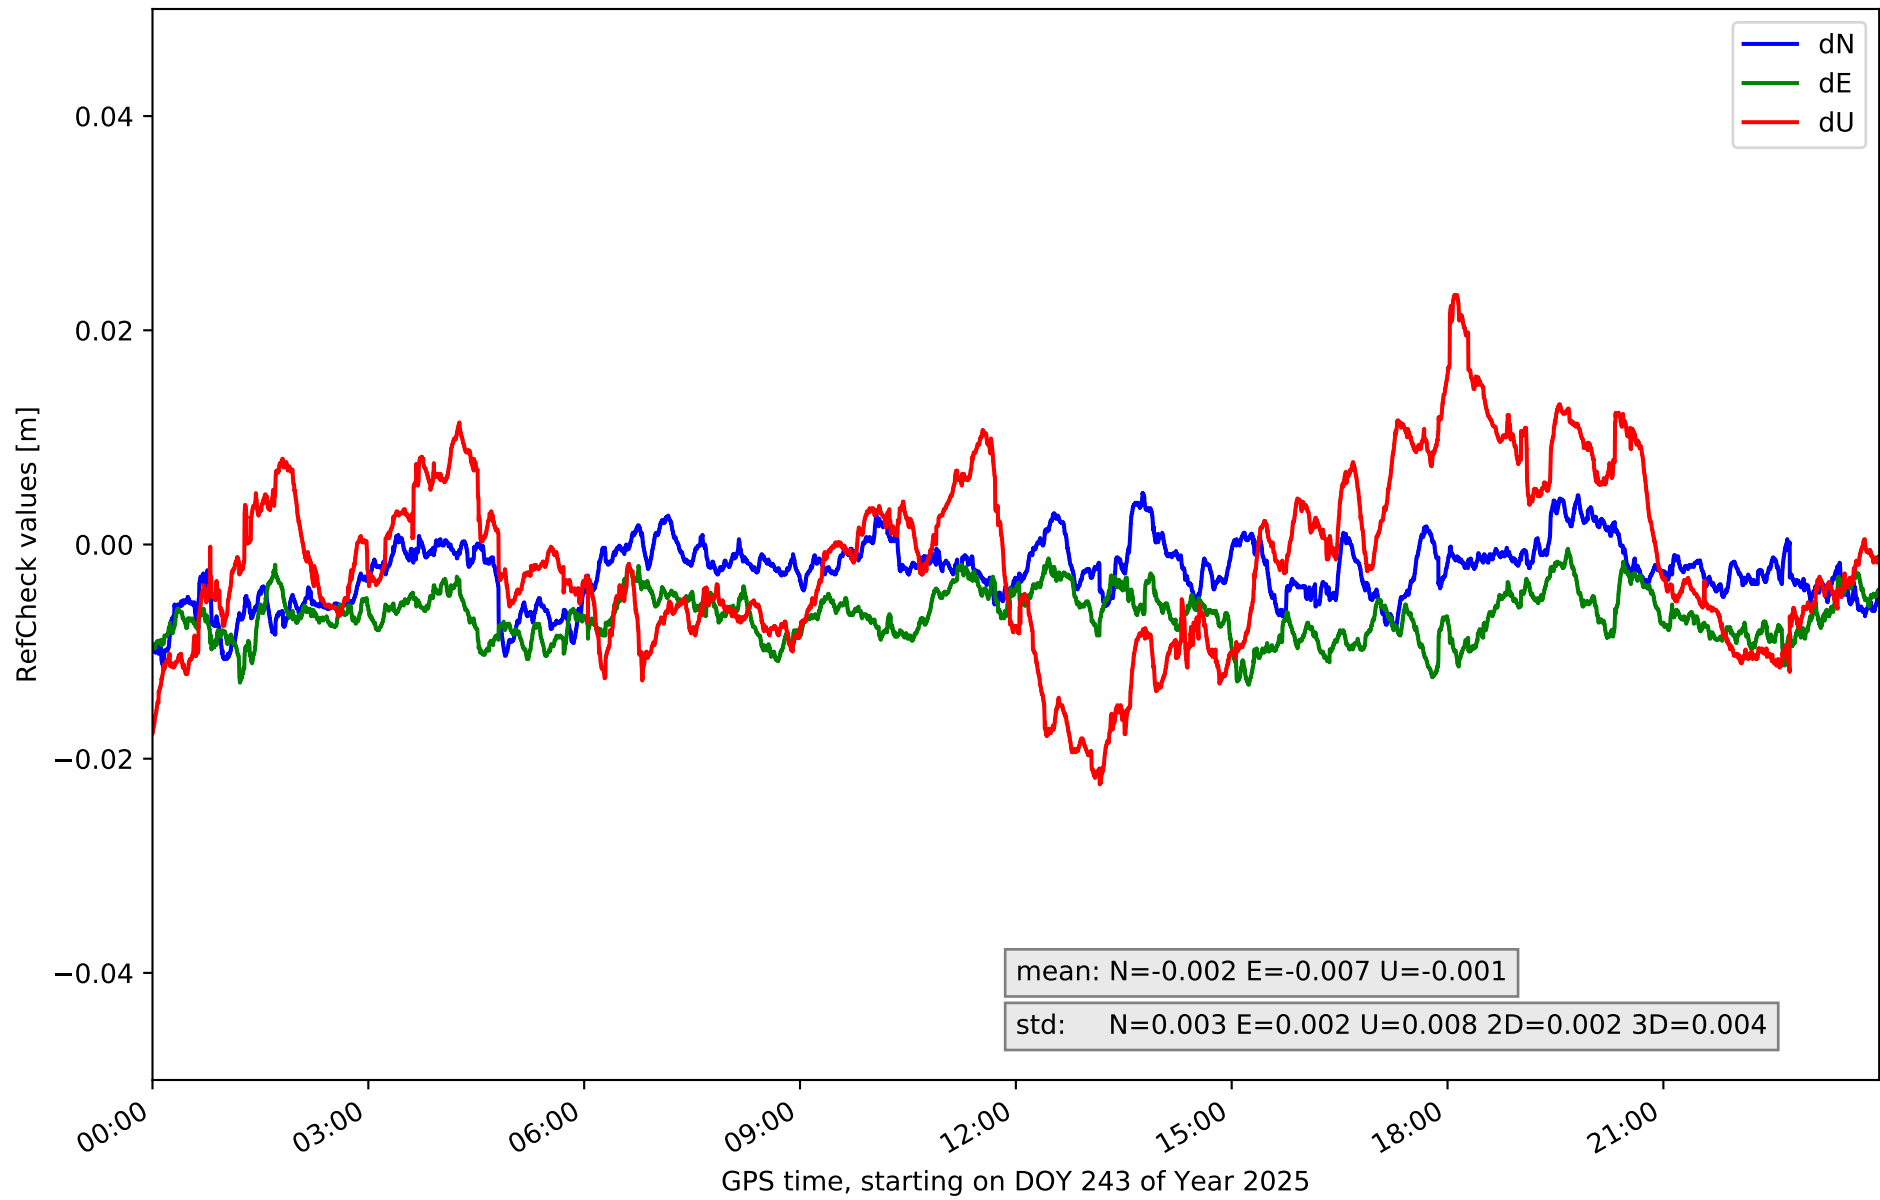

RefCheck for station TN09 in network NT32

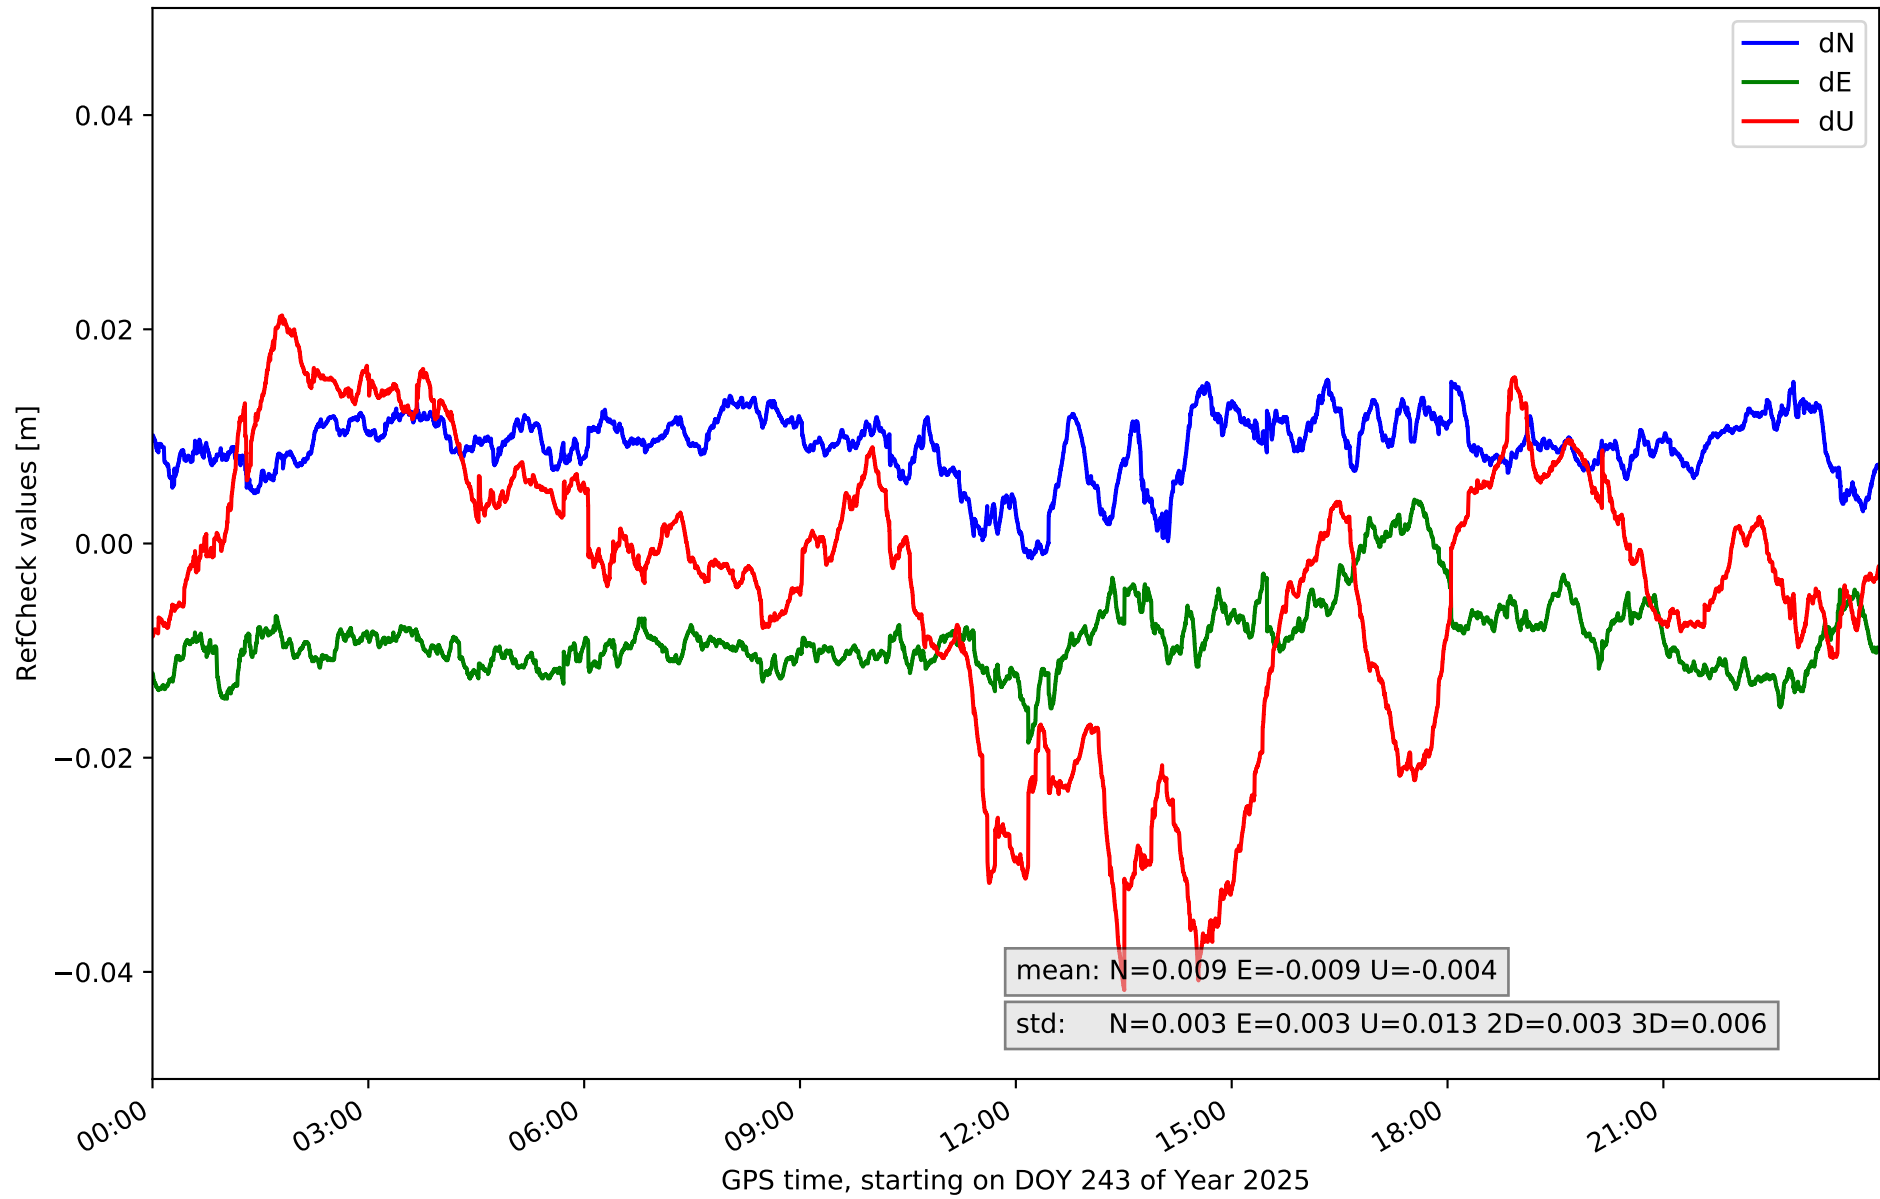

RefCheck for station TE11 in network NT32

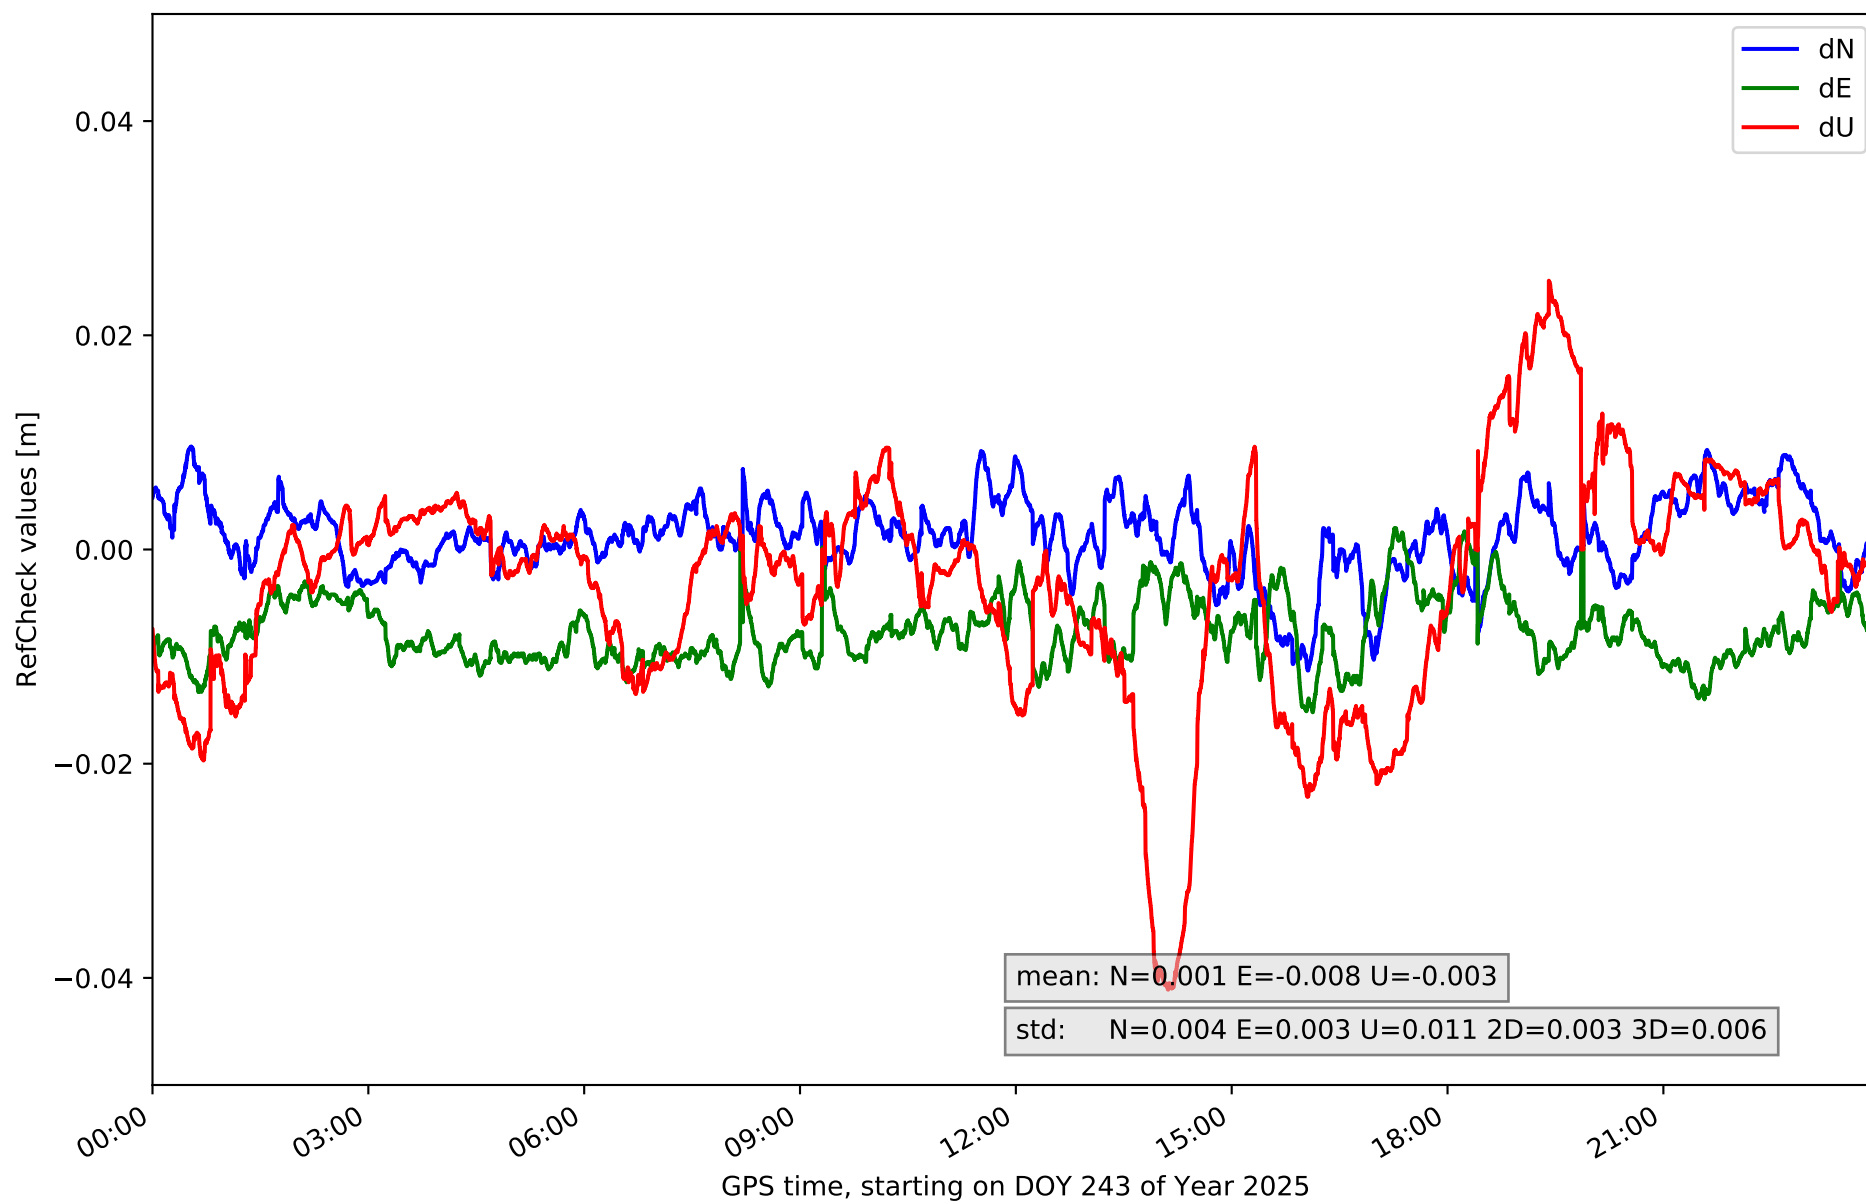

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.021	0.013	0.005	-0.023	0.026	0.007	-0.06	0.025	0.012	0.004	0.007	74444	97.1	36701	47.9
EH02	-0.005	0.014	0.003	-0.0	0.028	0.004	-0.01	0.06	0.015	0.004	0.012	71375	93.1	54086	70.6
GOM1	-0.017	0.02	0.005	-0.021	0.029	0.005	-0.065	0.005	0.01	0.004	0.008	55163	72.0	26312	34.3
IZAN	-0.014	0.008	0.003	-0.015	0.002	0.003	-0.019	0.012	0.006	0.003	0.004	15940	20.8	1456	1.9
LP01	-0.017	0.0	0.003	-0.011	0.024	0.006	-0.022	0.037	0.01	0.005	0.006	60397	78.8	17457	22.8
LP03	-0.03	0.009	0.005	-0.008	0.025	0.006	-0.054	0.053	0.02	0.006	0.012	36725	47.9	32899	42.9
LPAL	-0.017	-0.002	0.003	0.001	0.018	0.003	-0.024	0.01	0.007	0.004	0.004	56105	73.2	8087	10.6
LRES	-0.001	0.018	0.003	0.0	0.025	0.004	-0.017	0.019	0.007	0.004	0.004	66318	86.5	11966	15.6
TN01	-0.026	0.017	0.006	-0.025	0.008	0.006	-0.042	0.035	0.015	0.005	0.008	53101	69.3	34696	45.3
TN02	-0.012	0.026	0.004	-0.035	0.02	0.004	-0.017	0.042	0.01	0.004	0.007	33665	43.9	22712	29.6
TN03	-0.011	0.017	0.004	-0.017	0.019	0.005	-0.031	0.023	0.011	0.004	0.006	14786	19.3	18373	24.0
TN04	-0.006	0.008	0.003	-0.018	0.004	0.003	-0.027	0.015	0.008	0.003	0.004	17051	22.2	5628	7.3
TN06	-0.012	0.005	0.003	-0.013	-0.0	0.002	-0.022	0.023	0.008	0.002	0.004	11796	15.4	2231	2.9
TN09	-0.001	0.015	0.003	-0.019	0.004	0.003	-0.042	0.021	0.013	0.003	0.006	68766	89.7	19058	24.9
TE11	-0.011	0.01	0.004	-0.015	0.002	0.003	-0.041	0.025	0.011	0.003	0.006	25876	33.8	9642	12.6
Mean	-0.013	0.012	0.004	-0.015	0.016	0.004	-0.033	0.027	0.011	0.004	0.007	44100.5	57.5	20086.9	26.2
Min/Max	-0.03	0.026	0.006	-0.035	0.029	0.007	-0.065	0.06	0.02	0.006	0.012	74444	97.1	54086	70.6

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	92.3	93.0	90.9	92.8	92.4
considering satellites with dual-frequency fixed	90.8	90.7	88.9	91.9	91.4
considering all signals separately	90.6	90.2	88.9	92.2	90.1