

summary for network N32T

timeperiod chosen: from 2025-09-01-00:00:00 until 2025-09-01-22:16:13

average update rate (durations larger than 15 seconds considered as observation gap): 1.1 seconds


average fixing percentage with threshold set to 0.3: 91.2 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

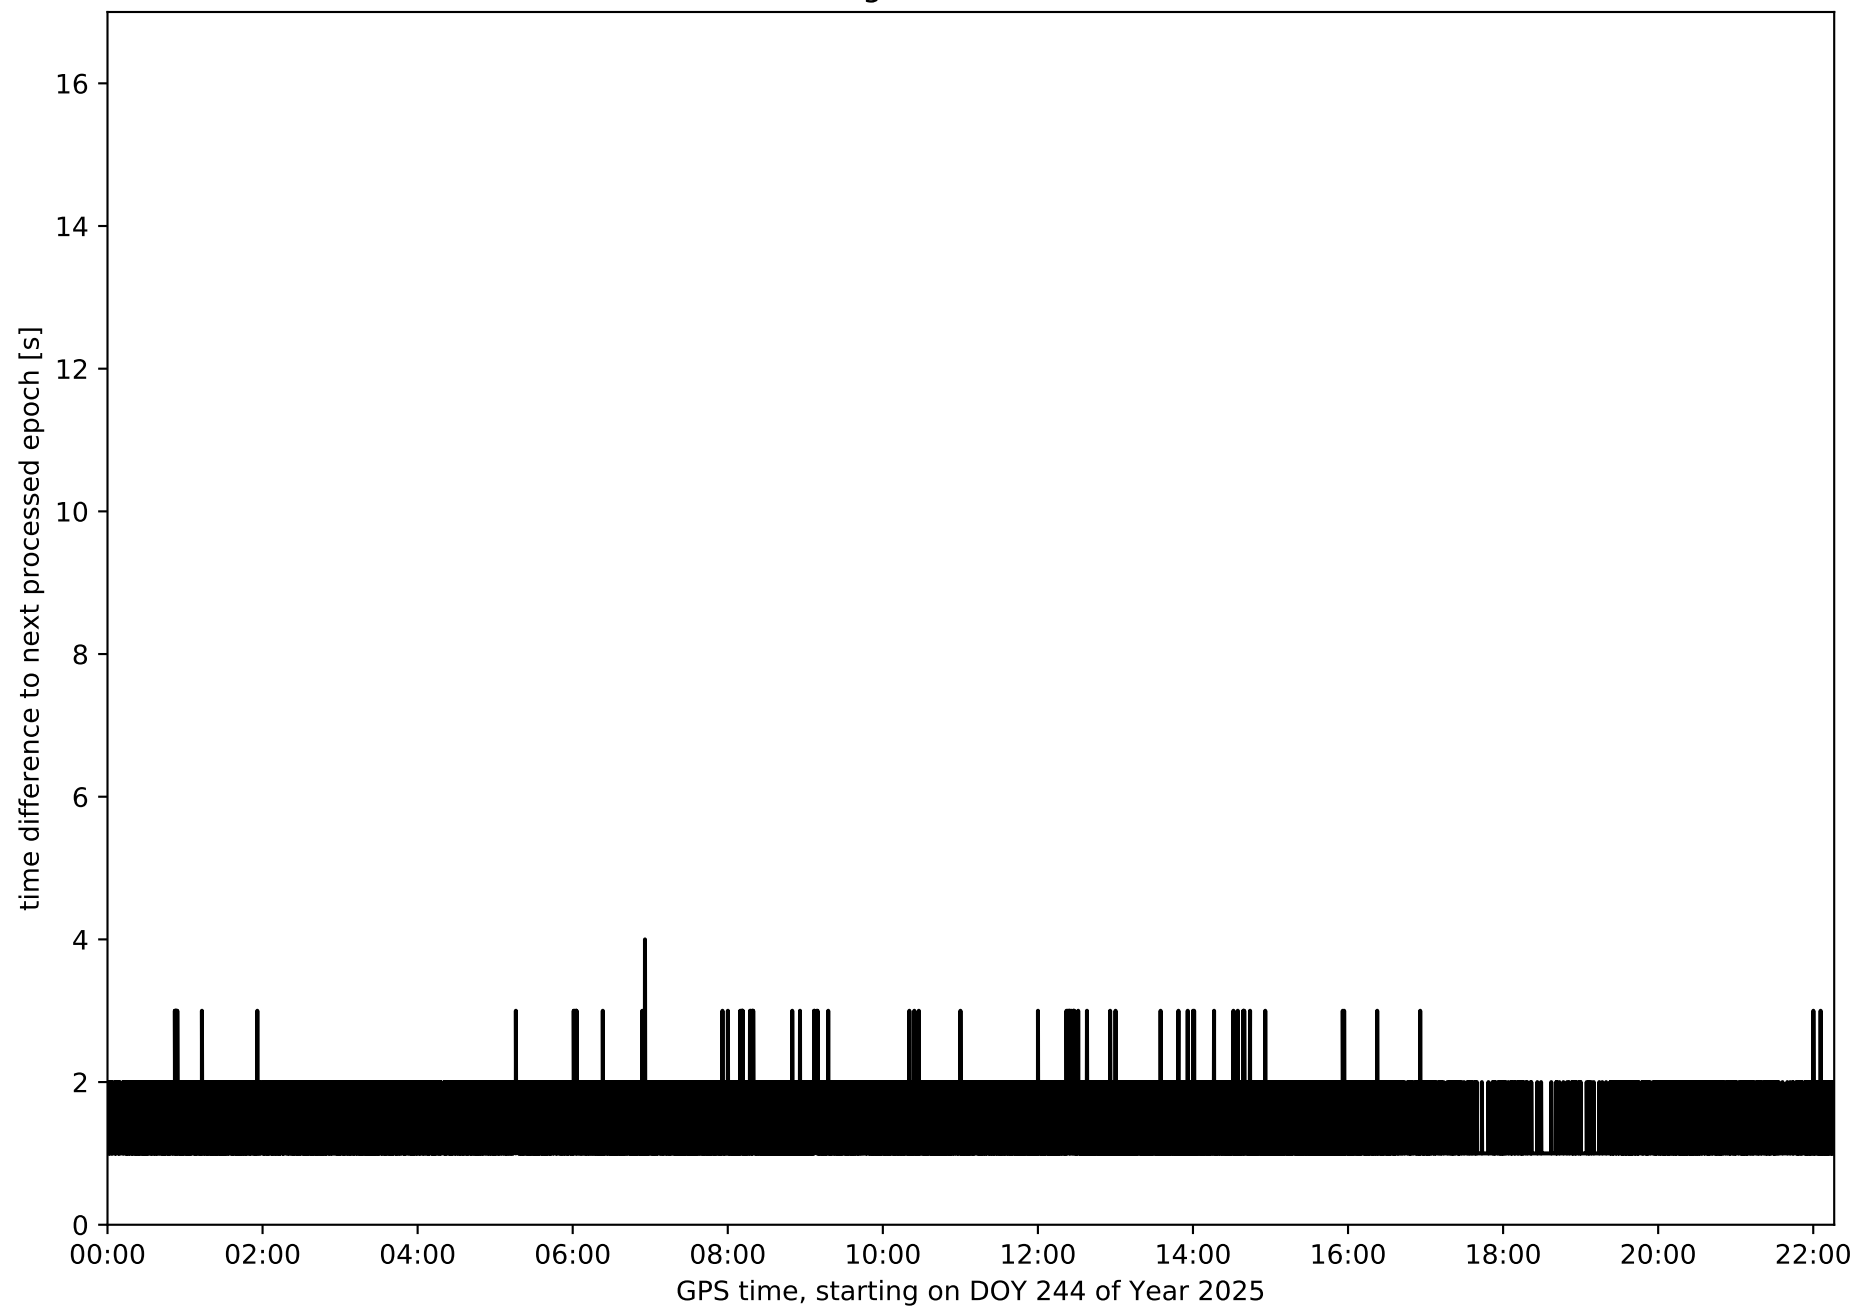


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

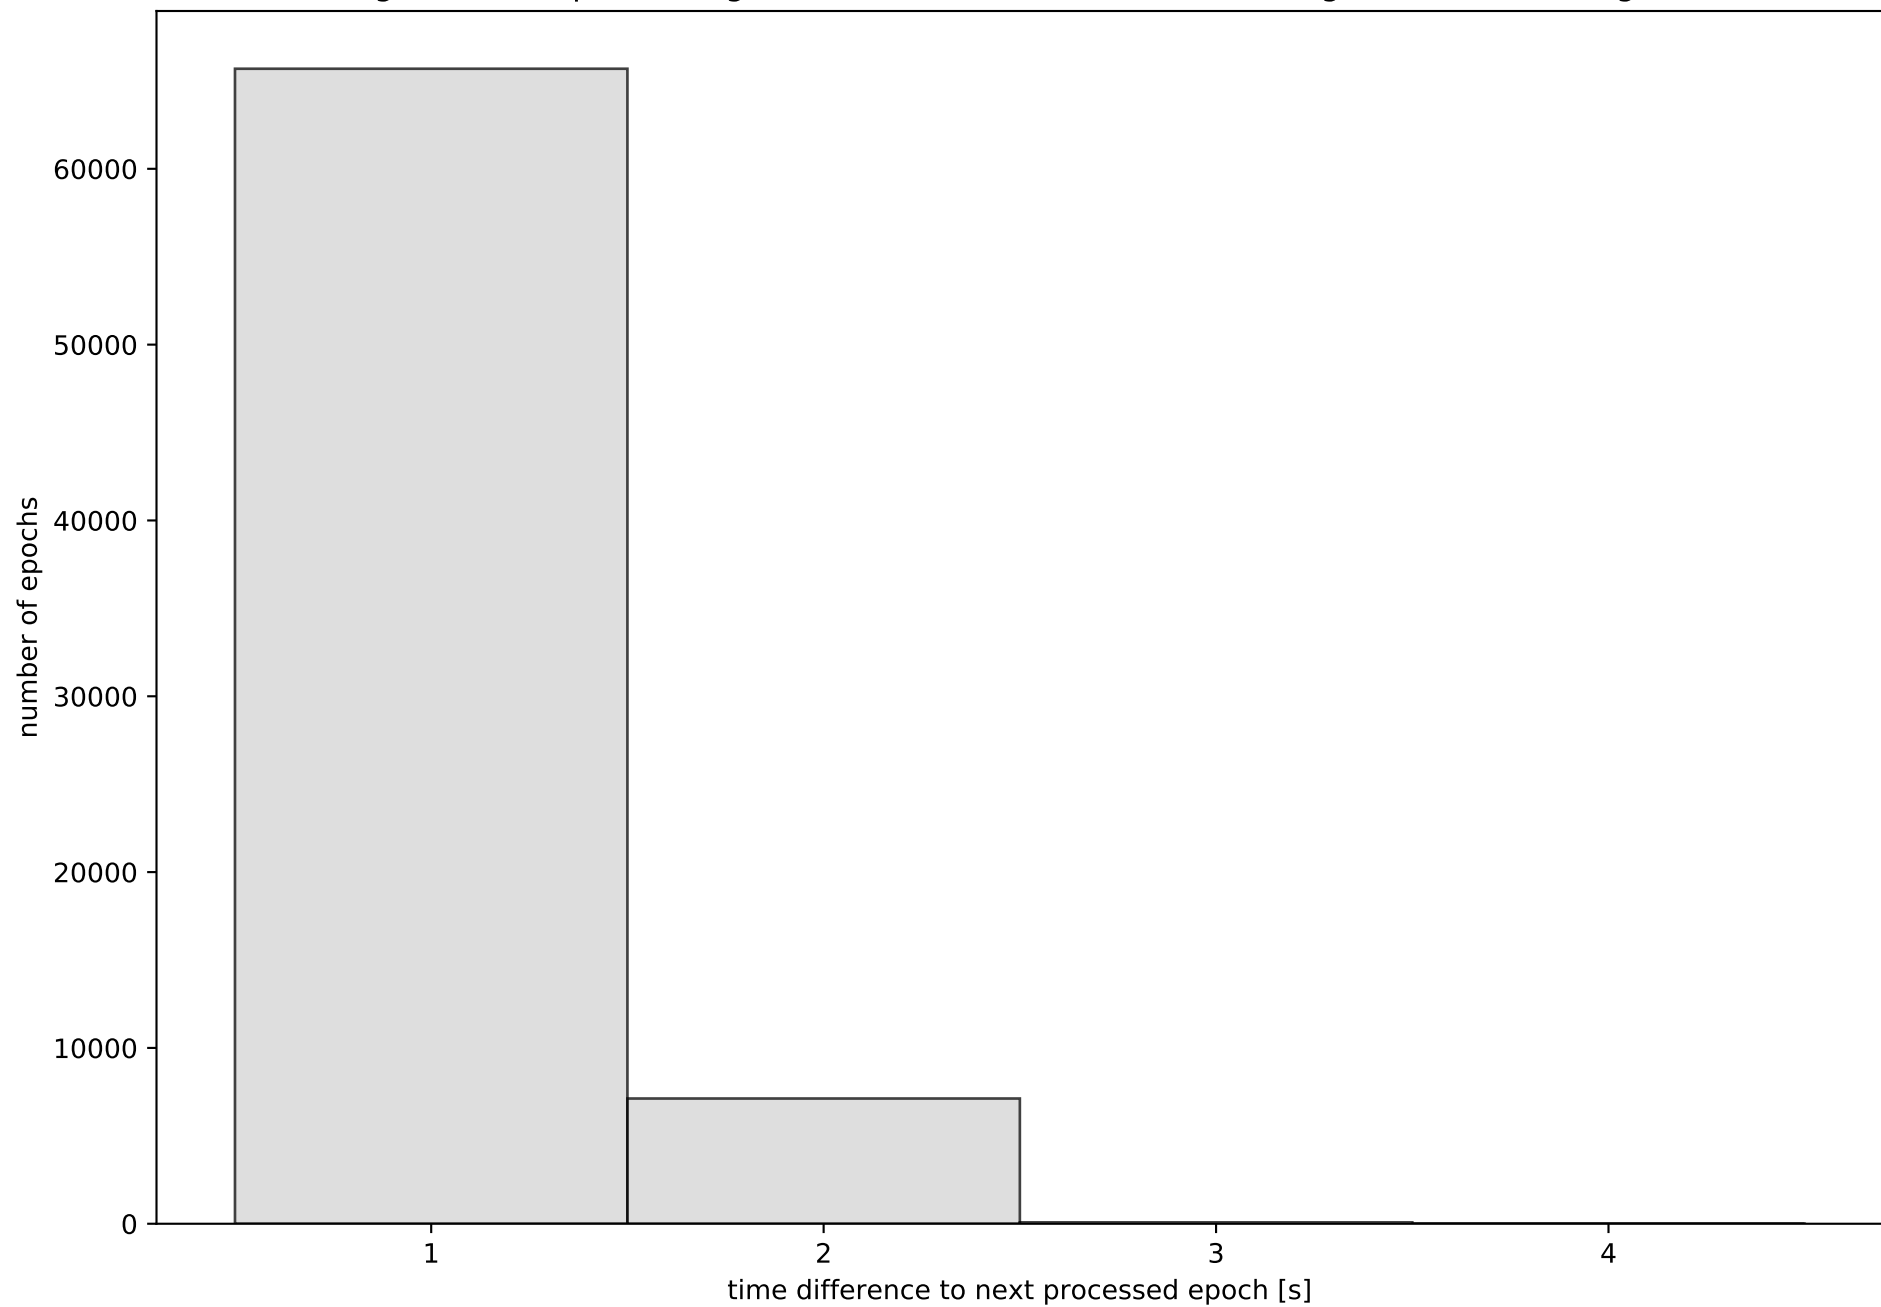


Network N32T with threshold set to 0.3

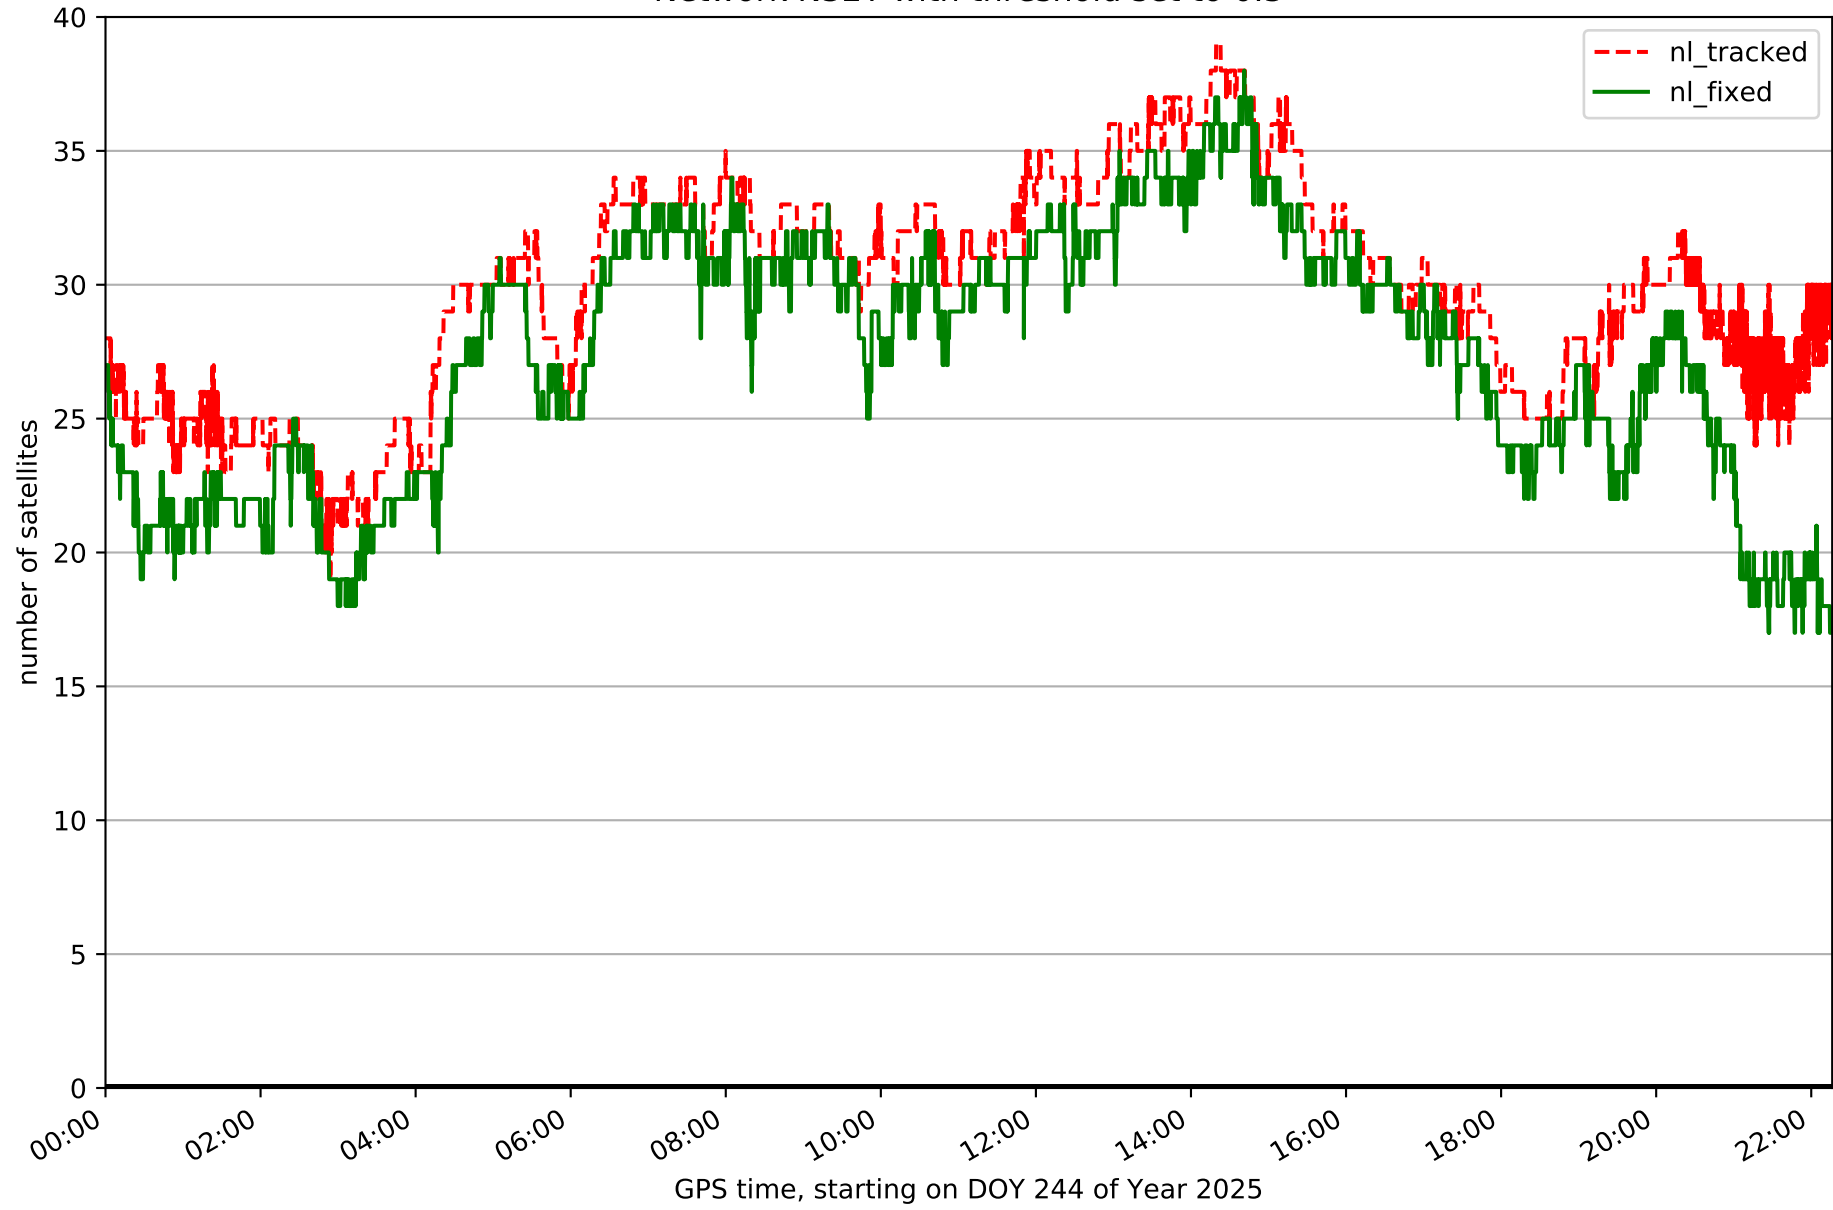


Fixing percentage of satellites in network N32T with threshold set to 0.3

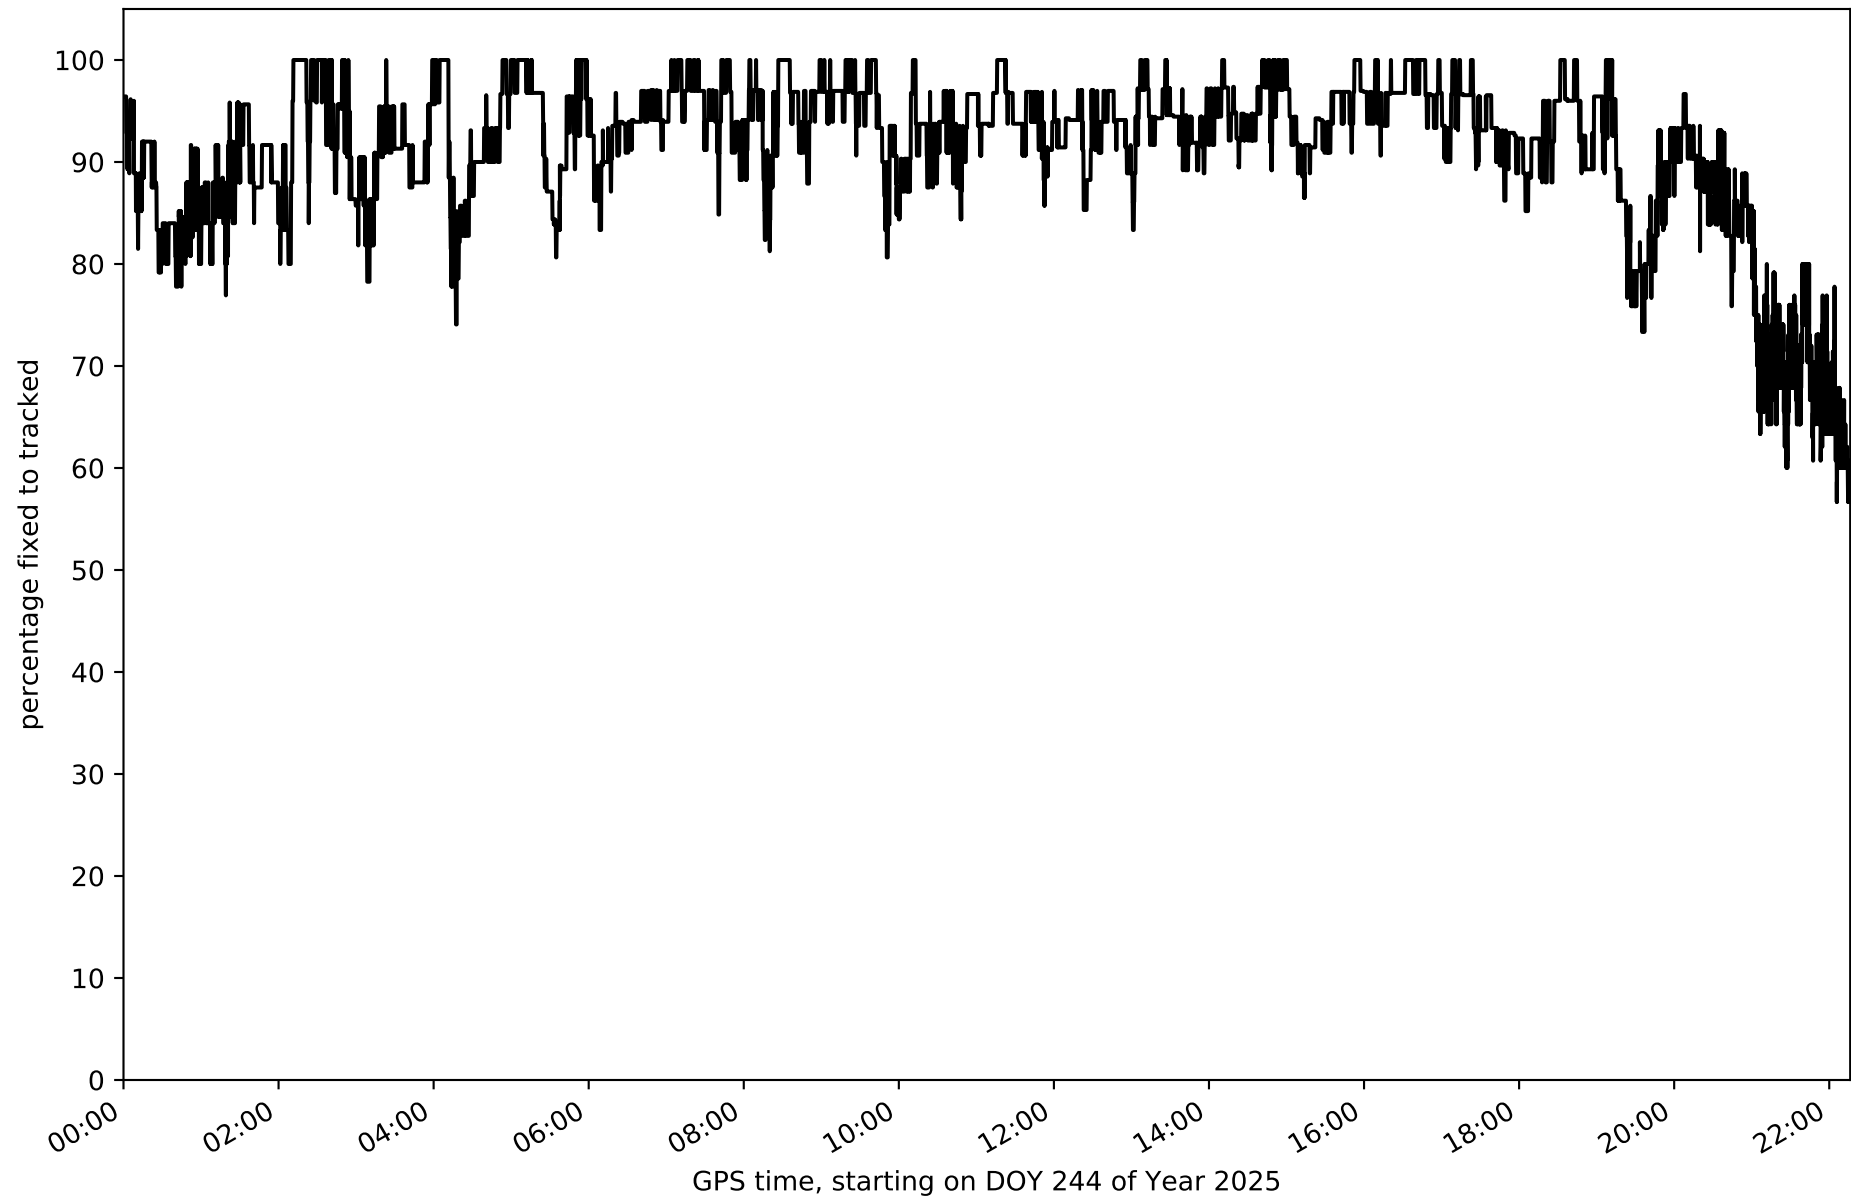


Network N32T - only GPS with threshold set to 0.3

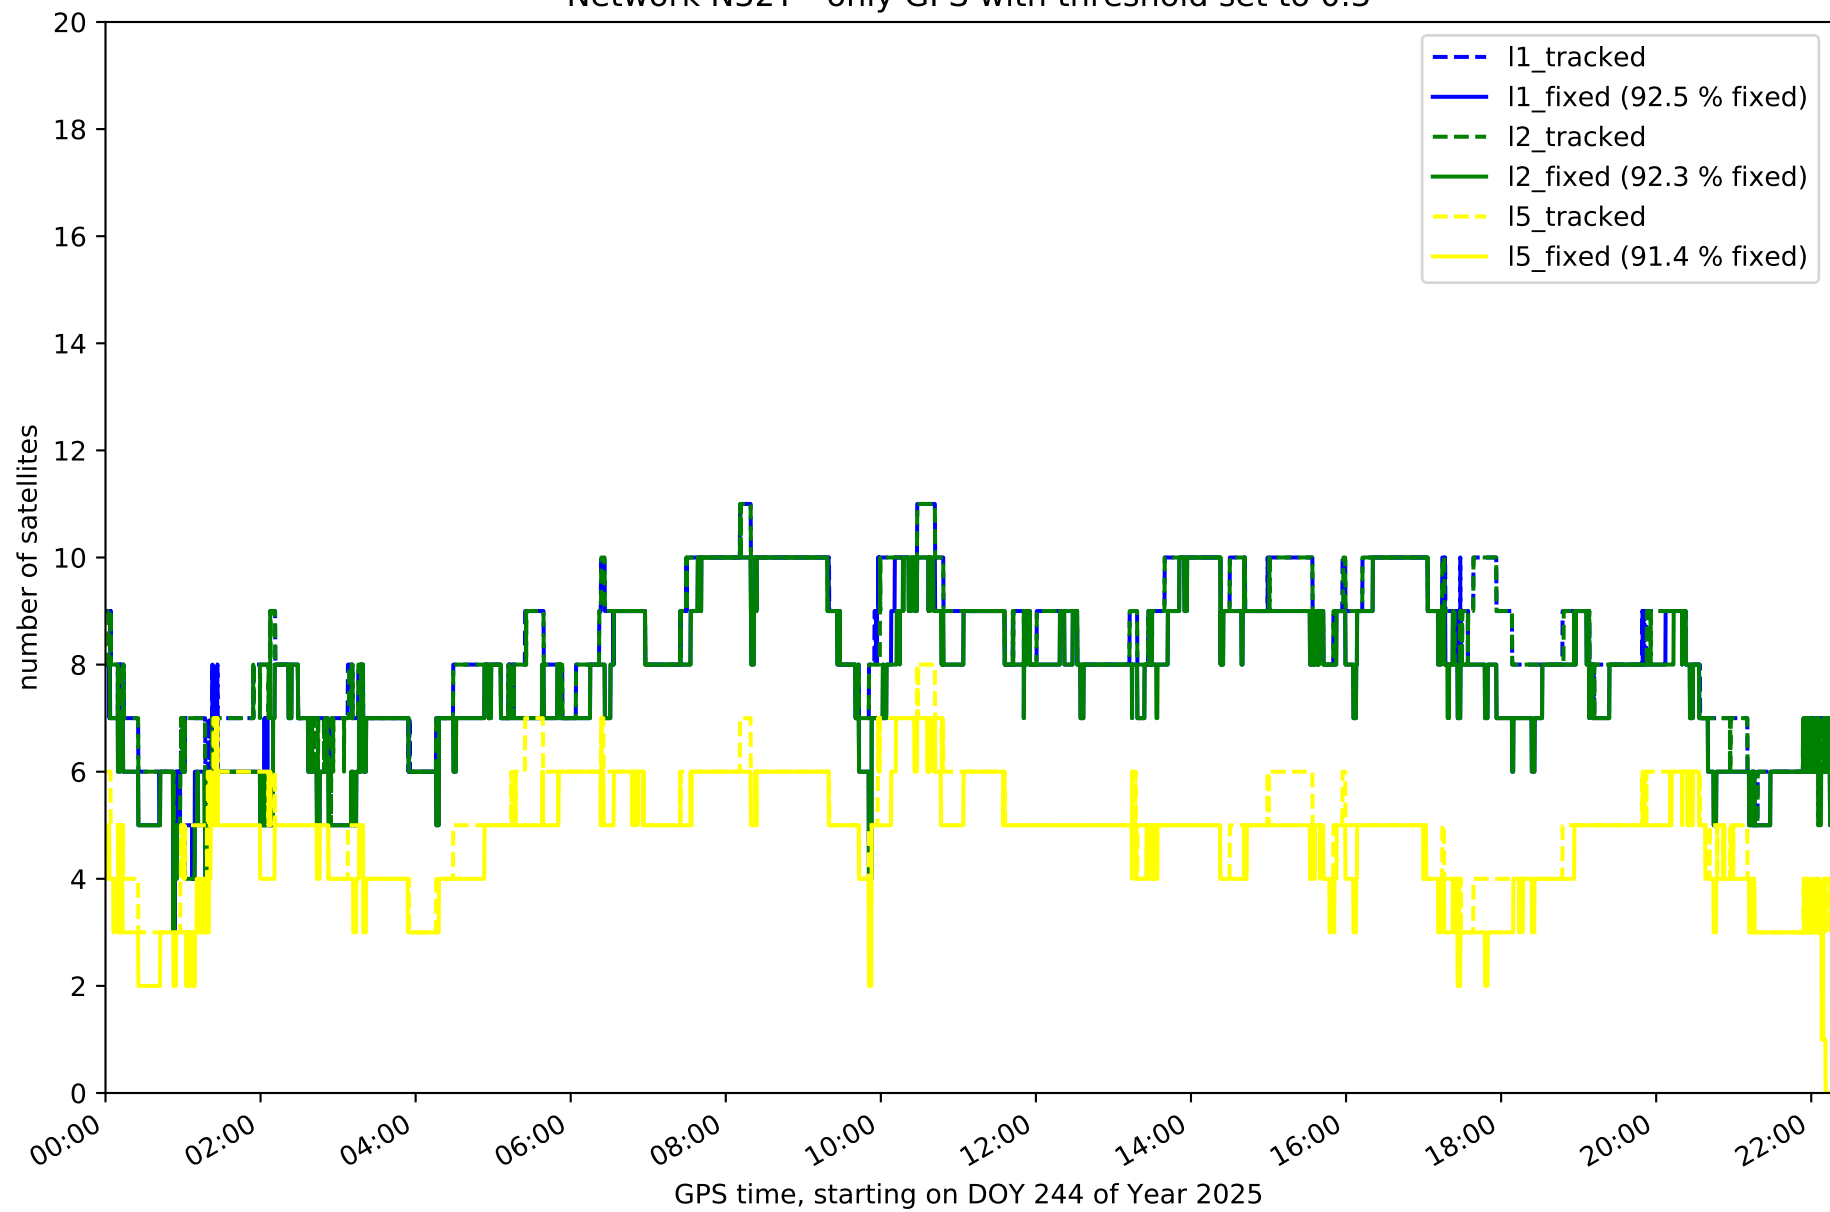


Network N32T - only GLONASS with threshold set to 0.3

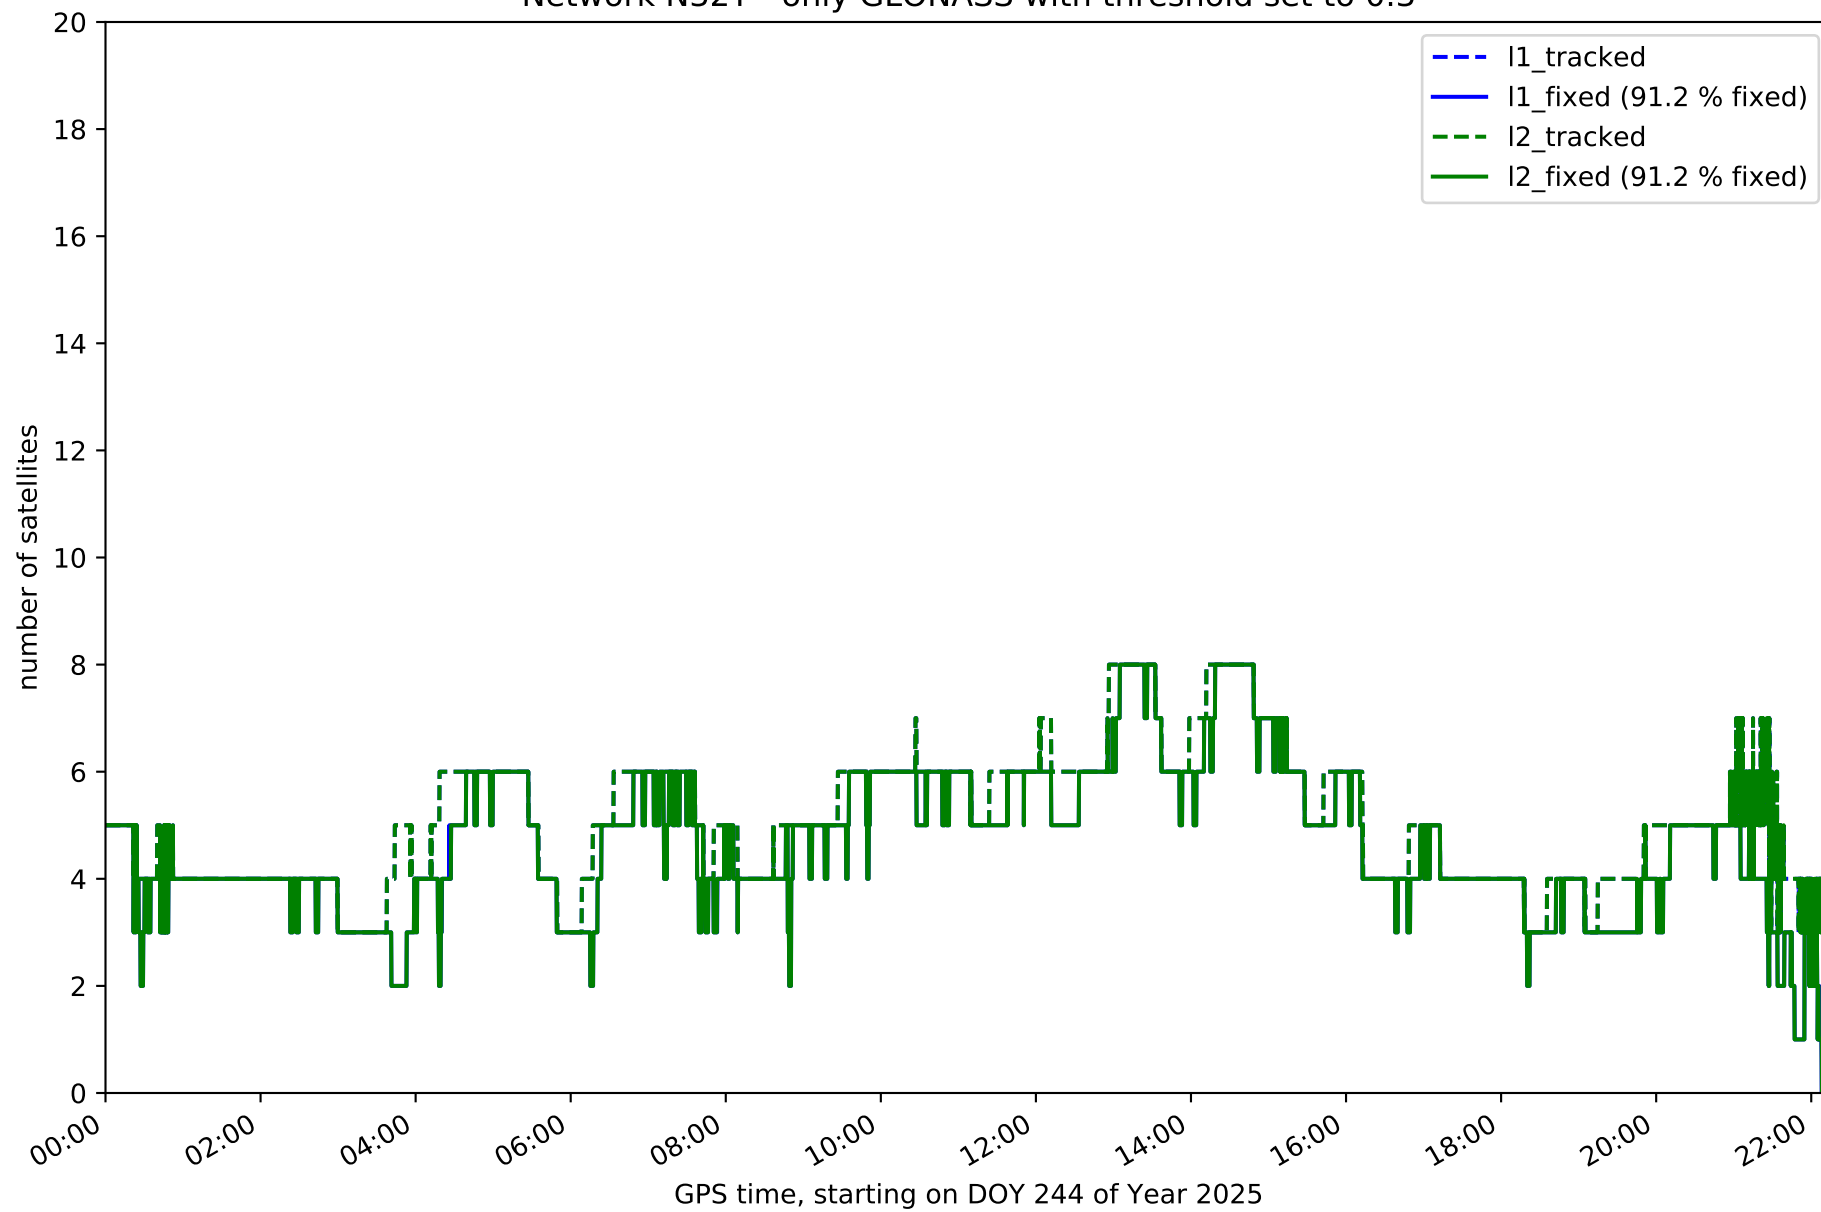


Network N32T - only BDS with threshold set to 0.3

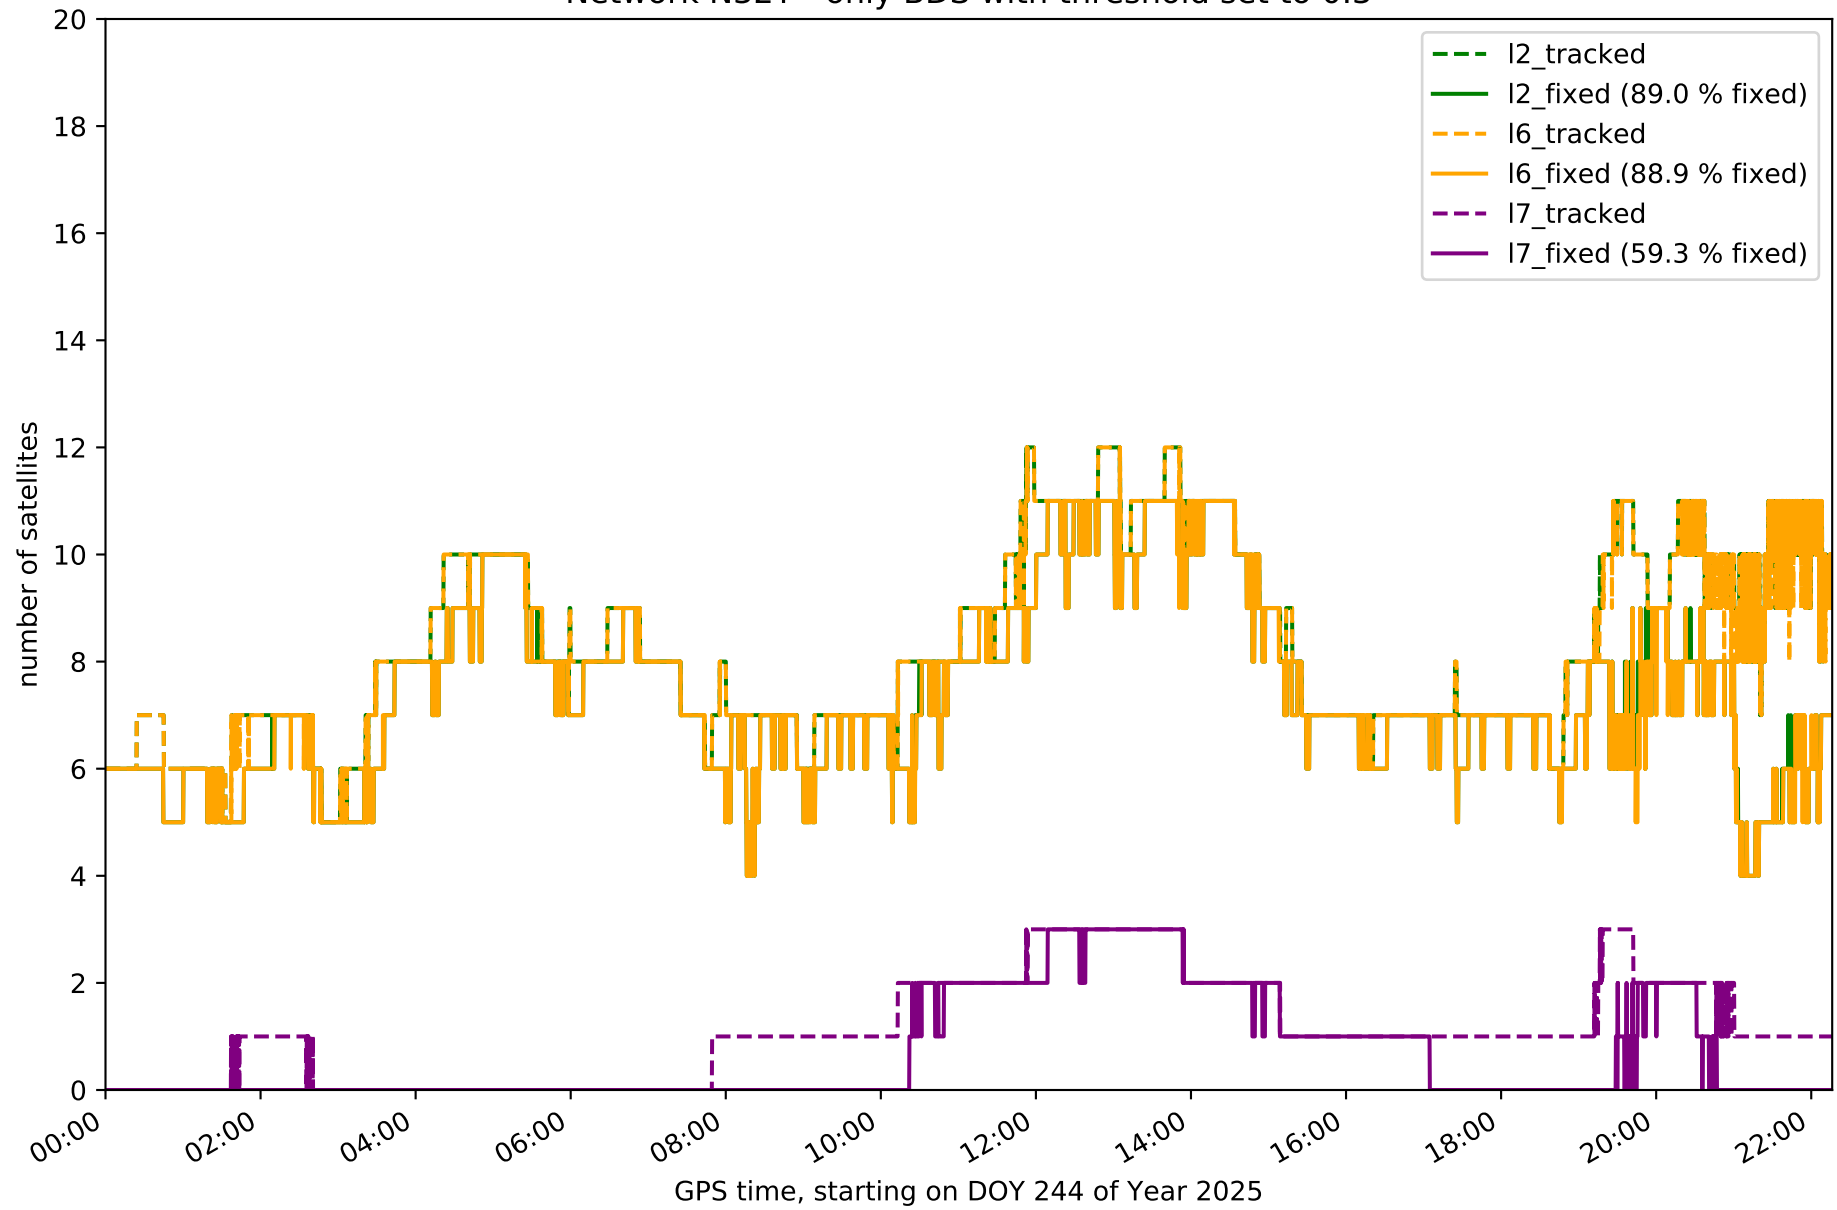


Network N32T - only Galileo with threshold set to 0.3

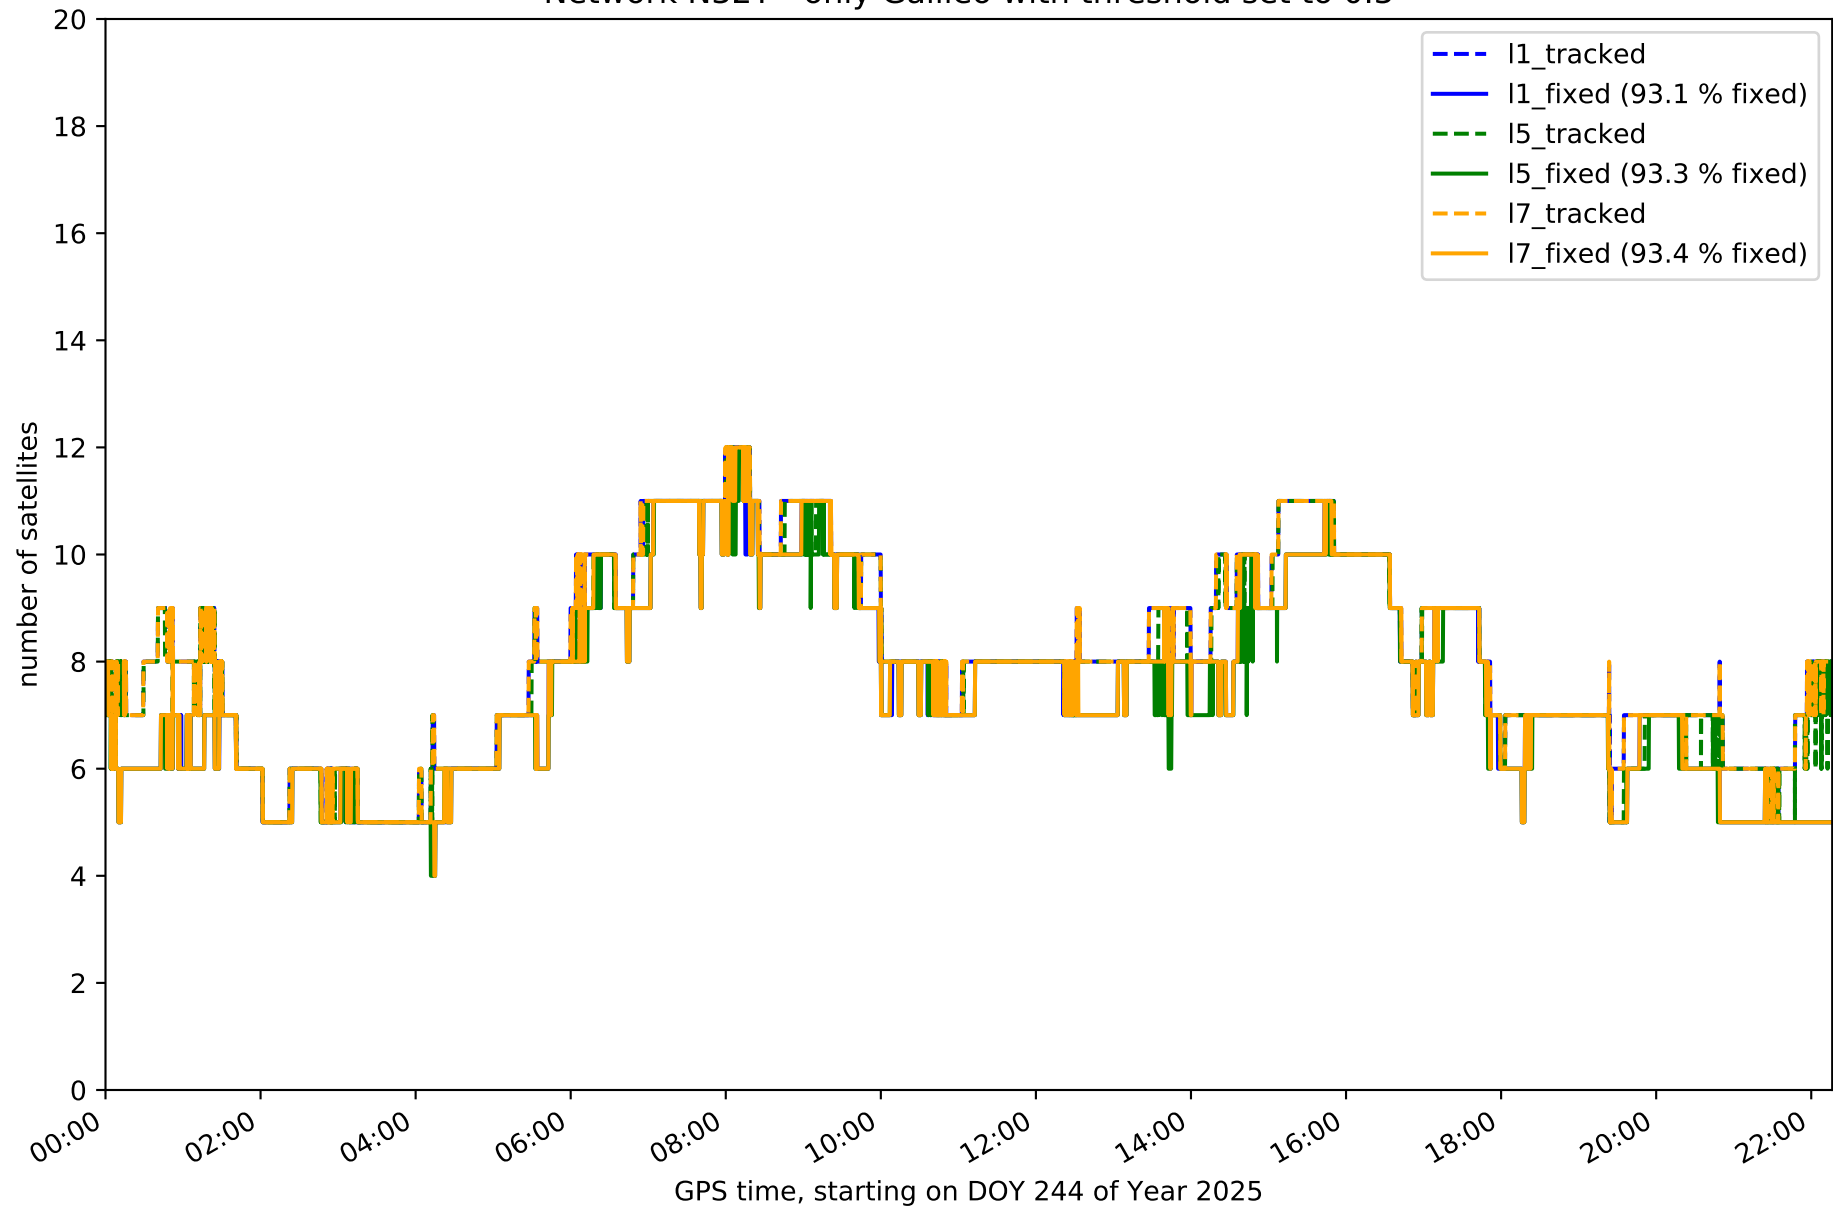


Station EH01 in network N32T

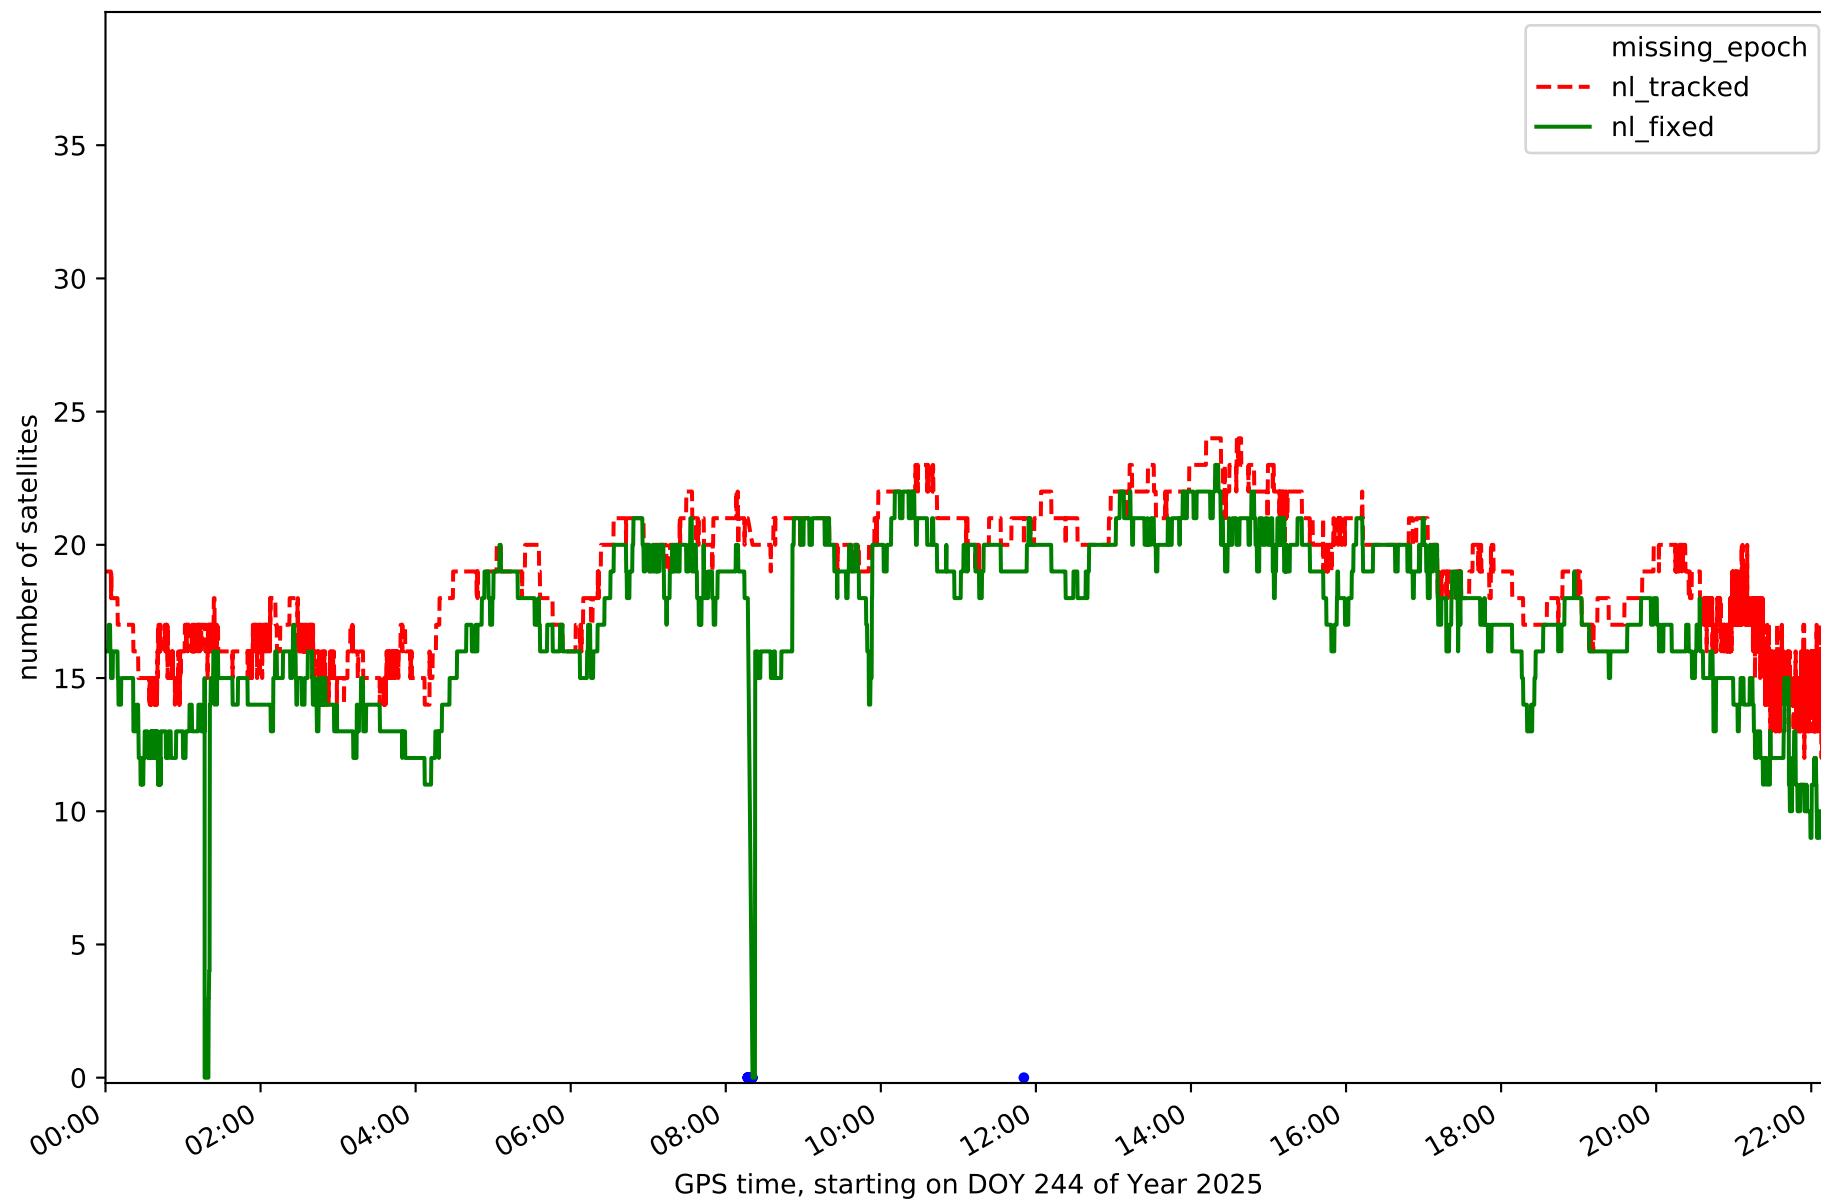


Station EH02 in network N32T

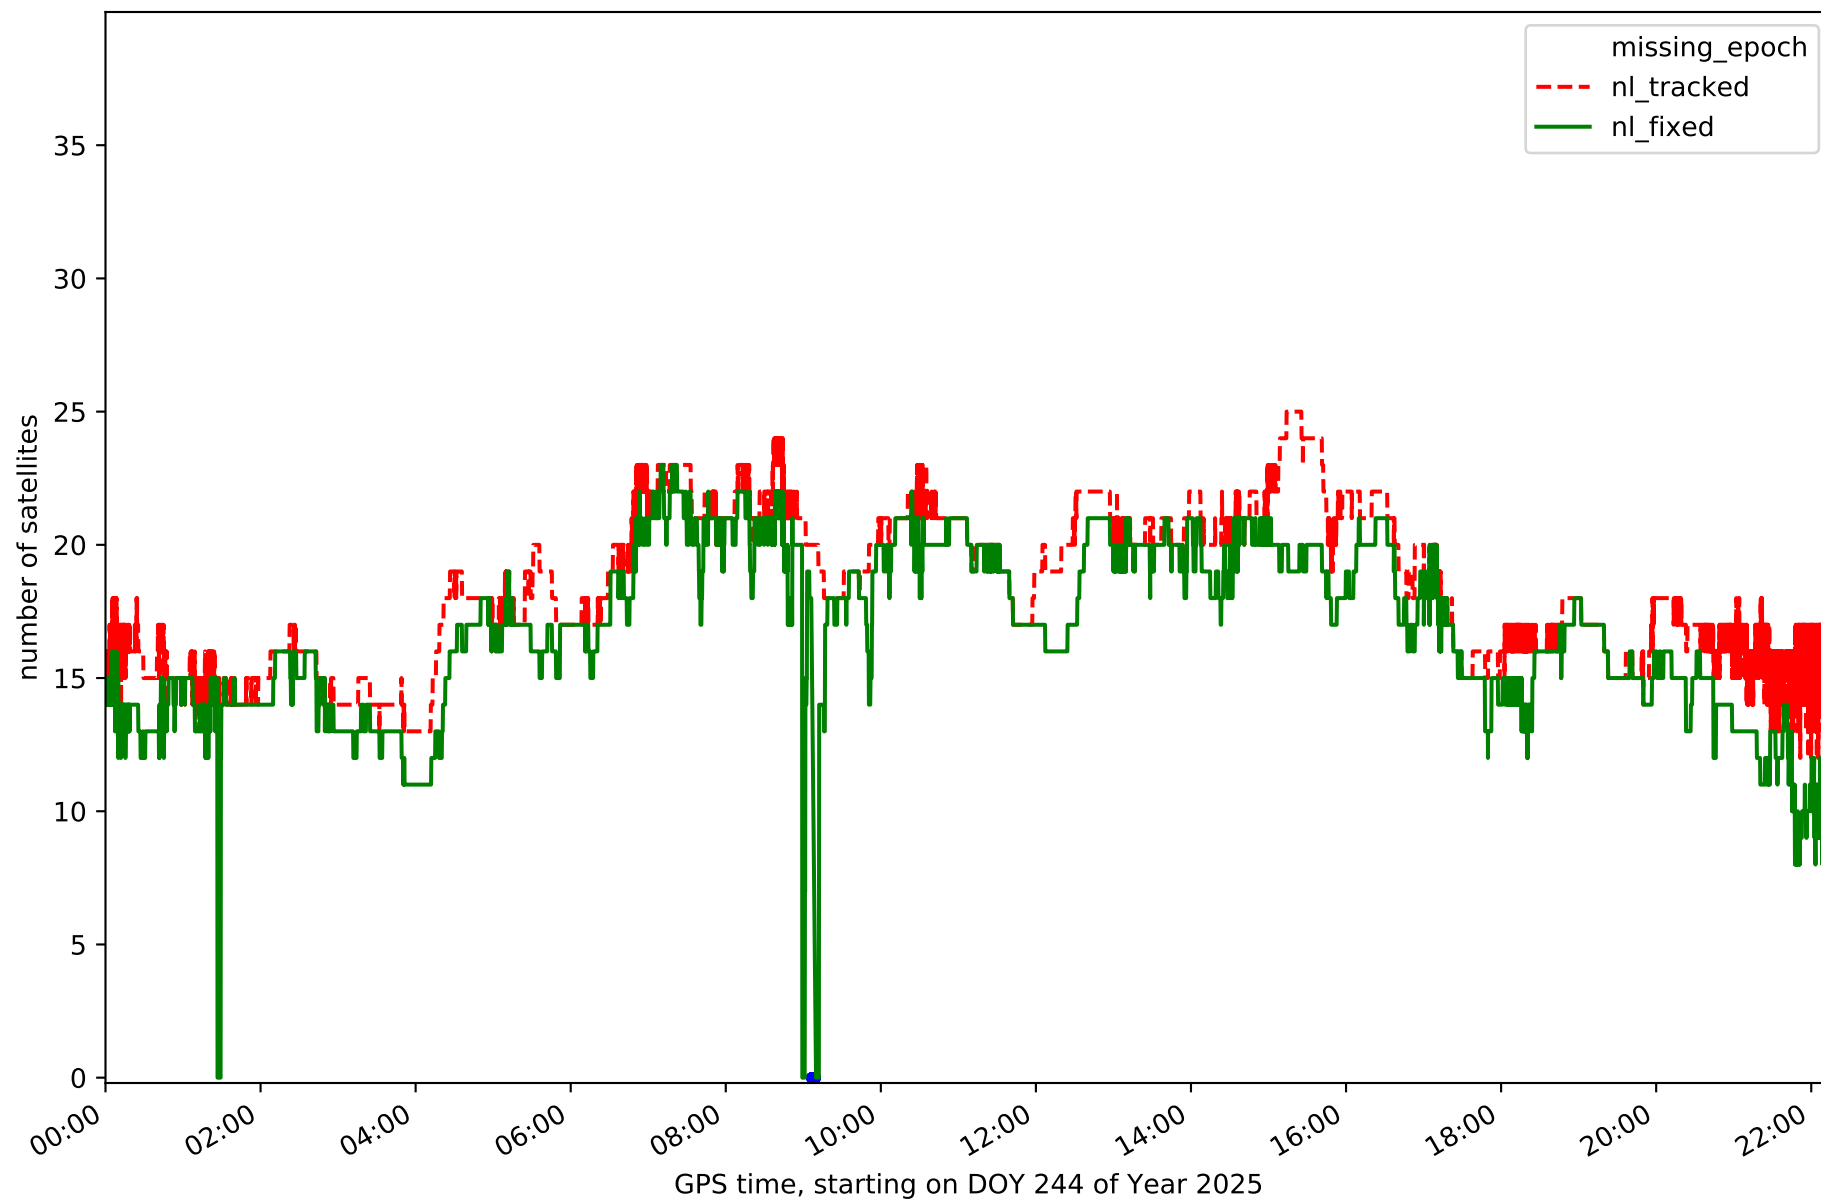


Station GOM1 in network N32T

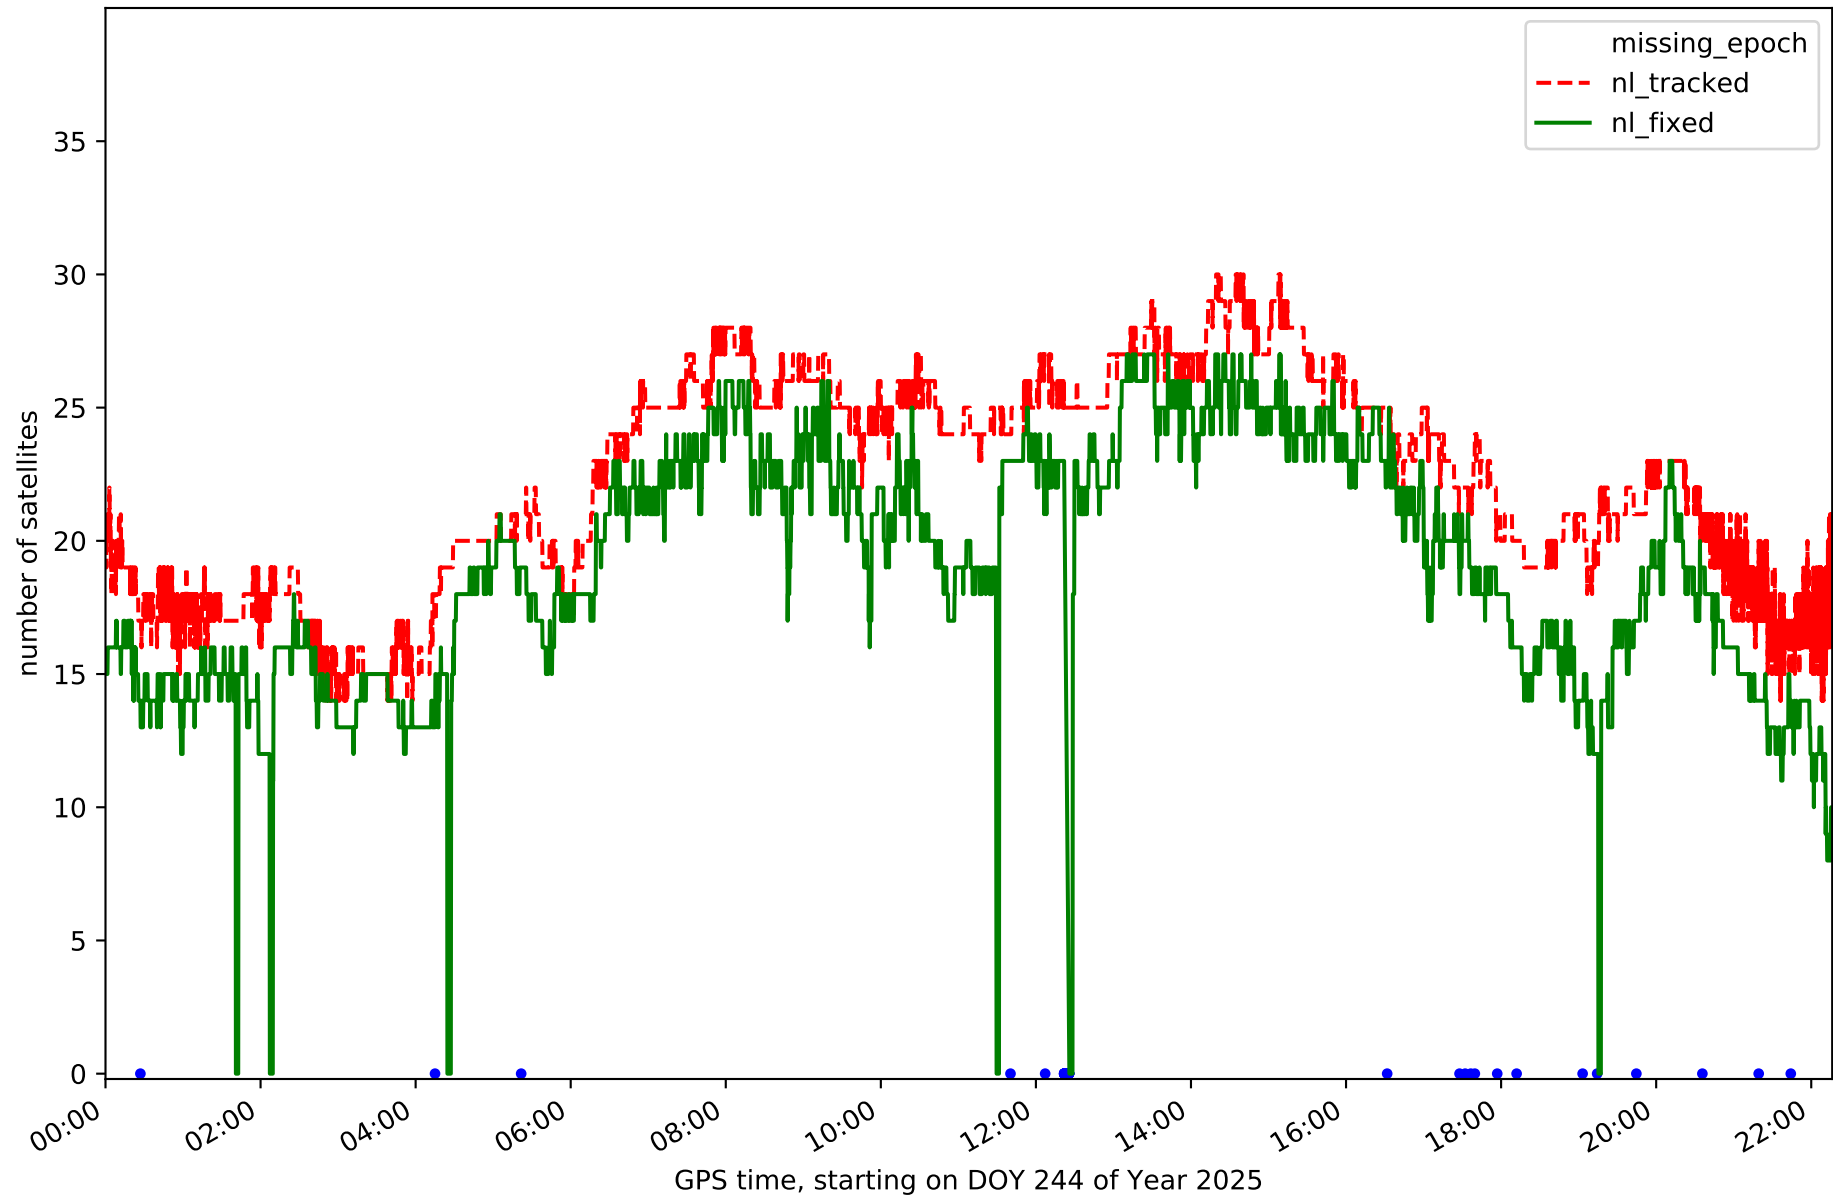


Station IZAN in network N32T

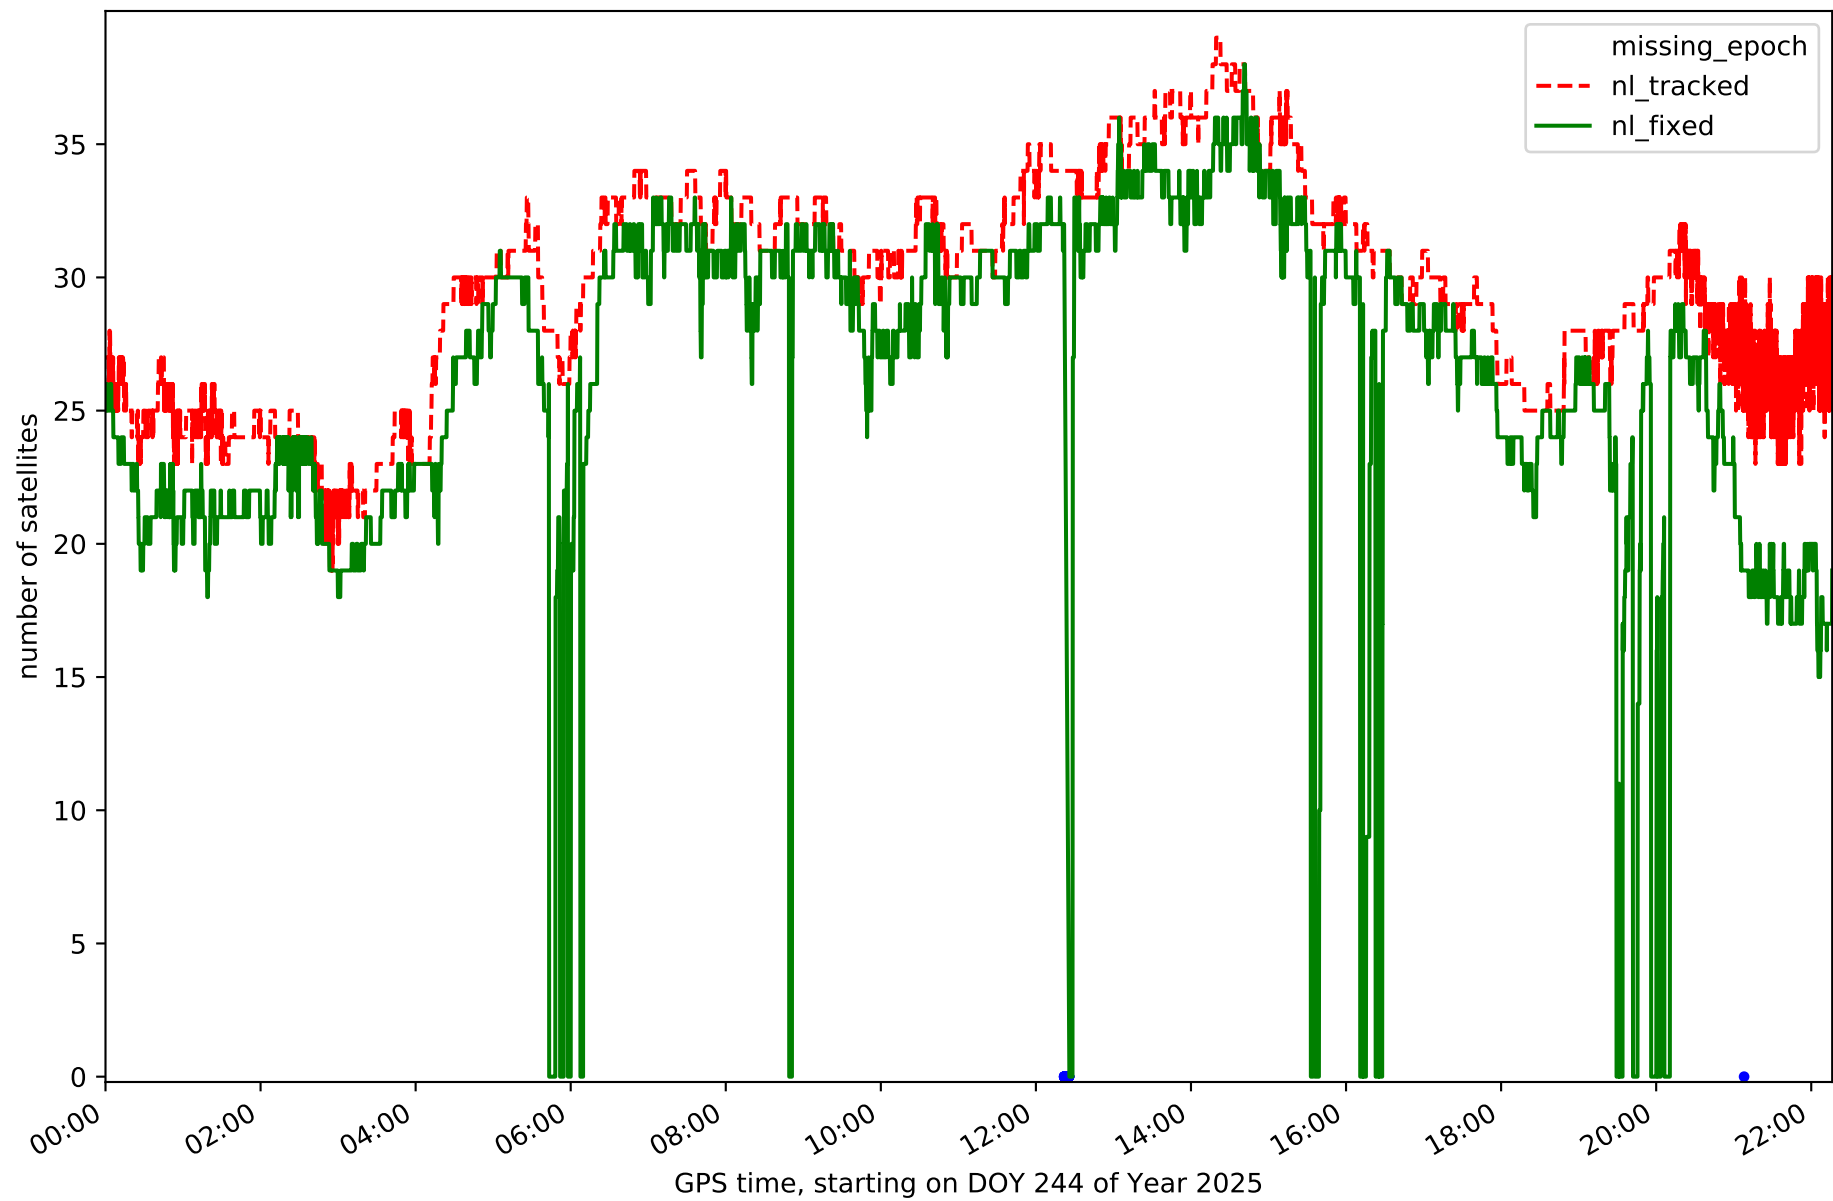


Station LP01 in network N32T

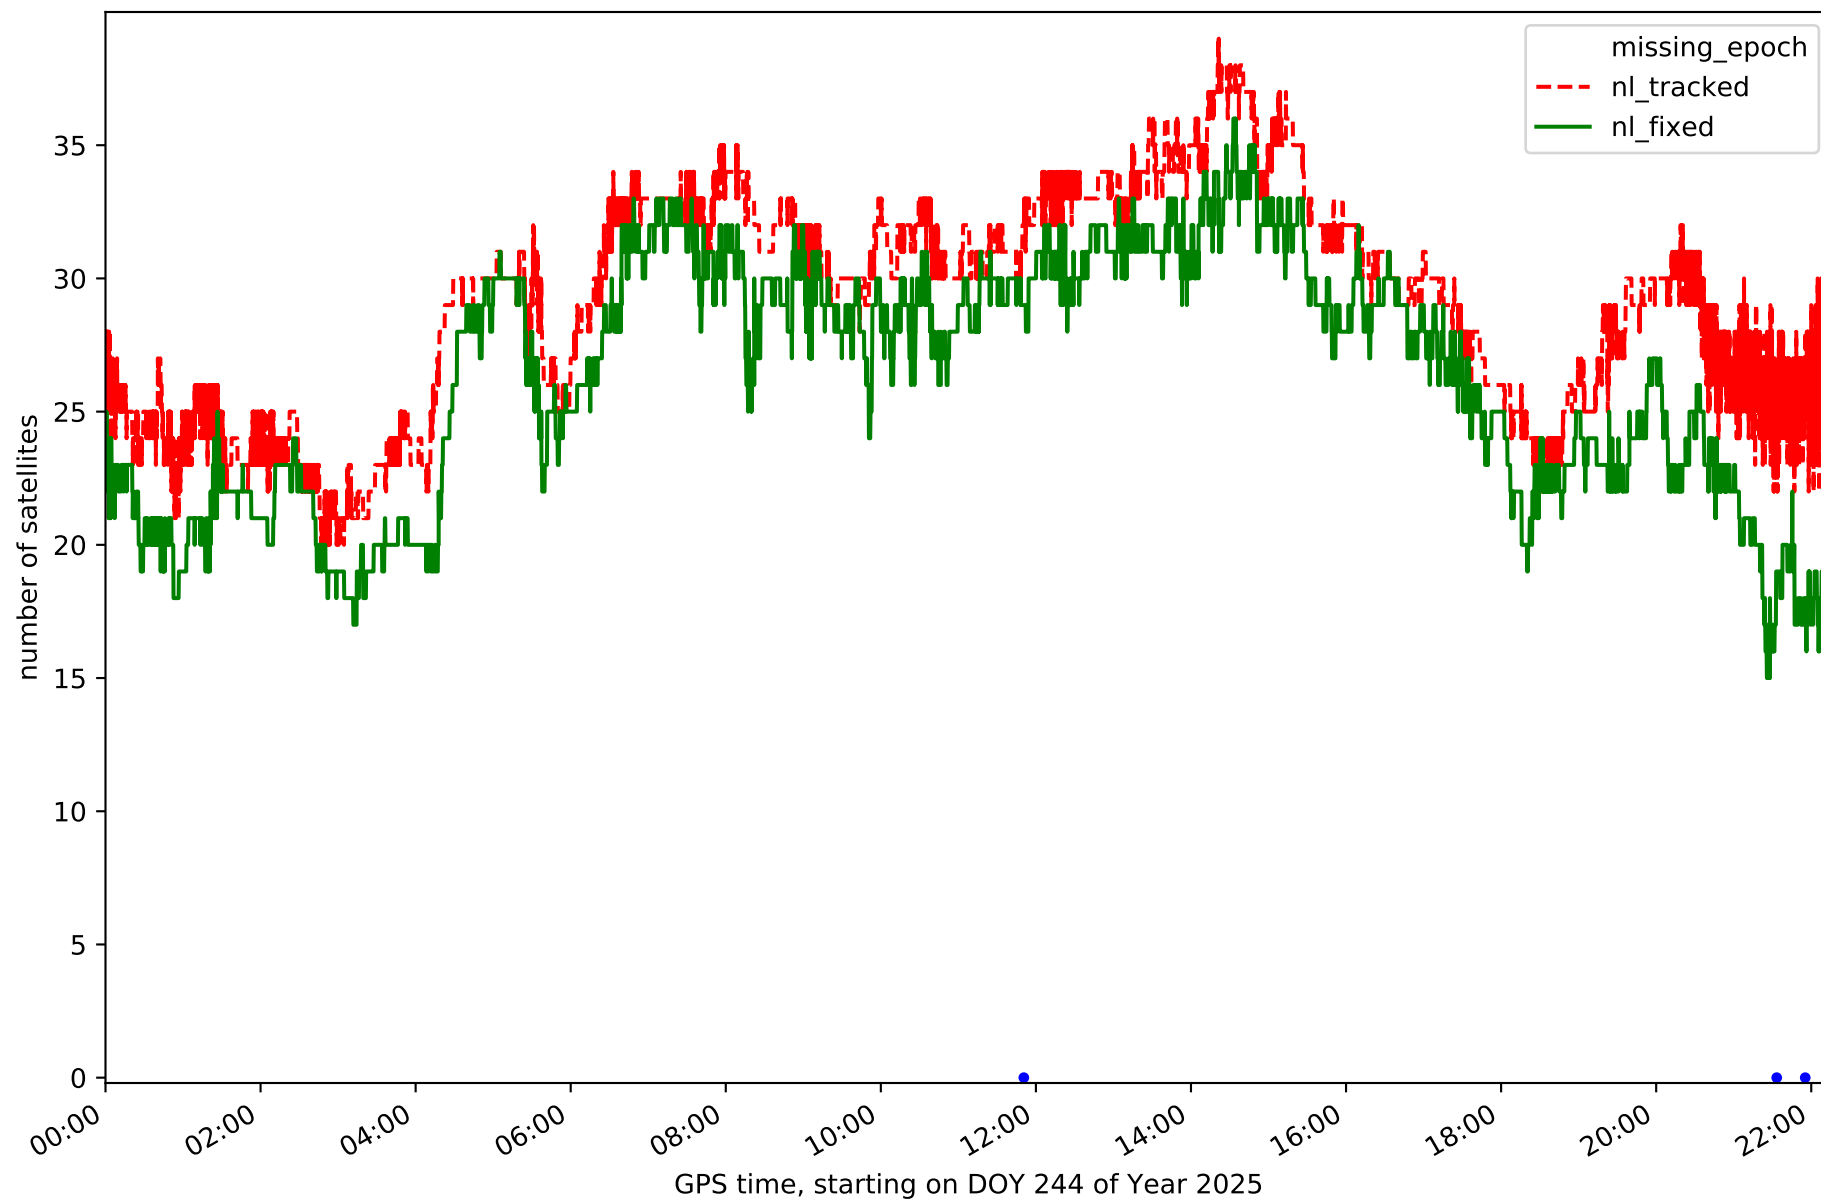


Station LP03 in network N32T

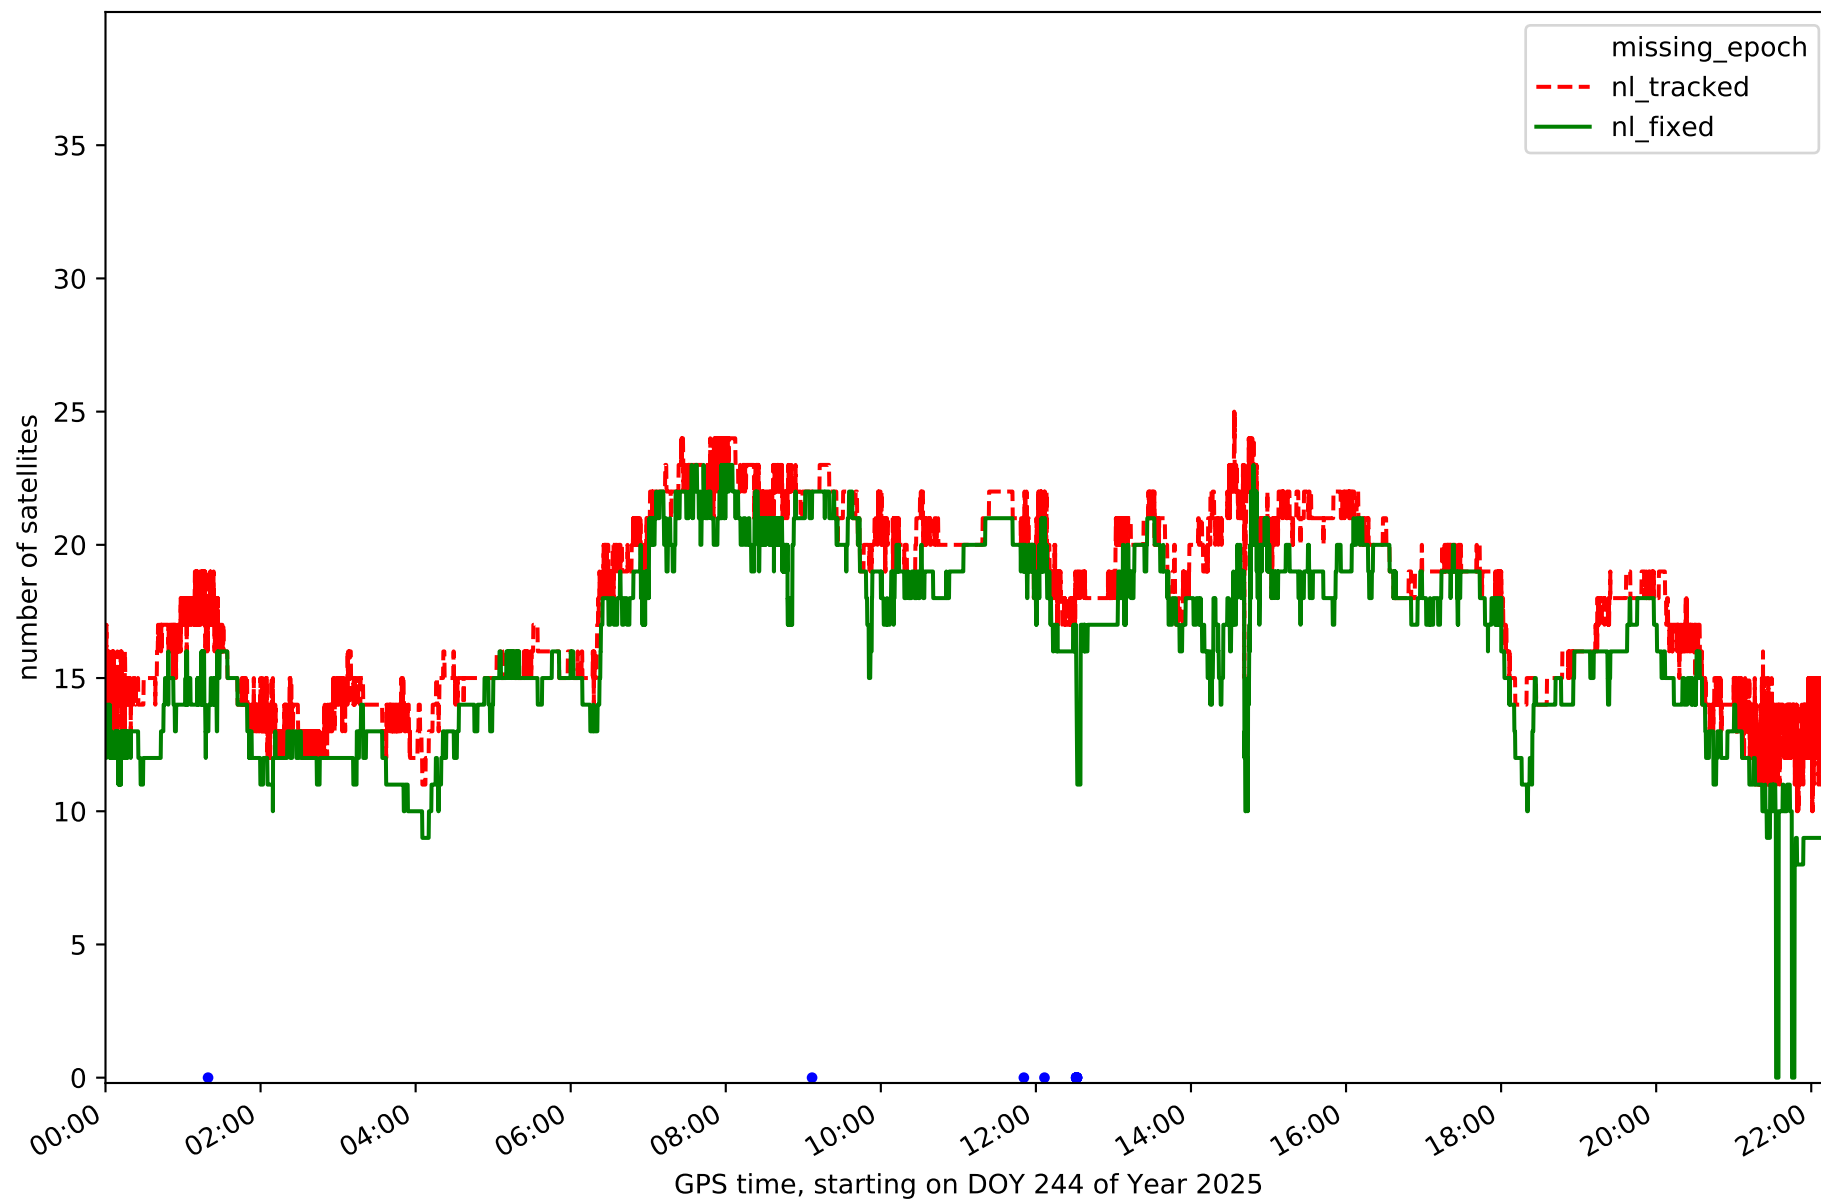


Station LPAL in network N32T

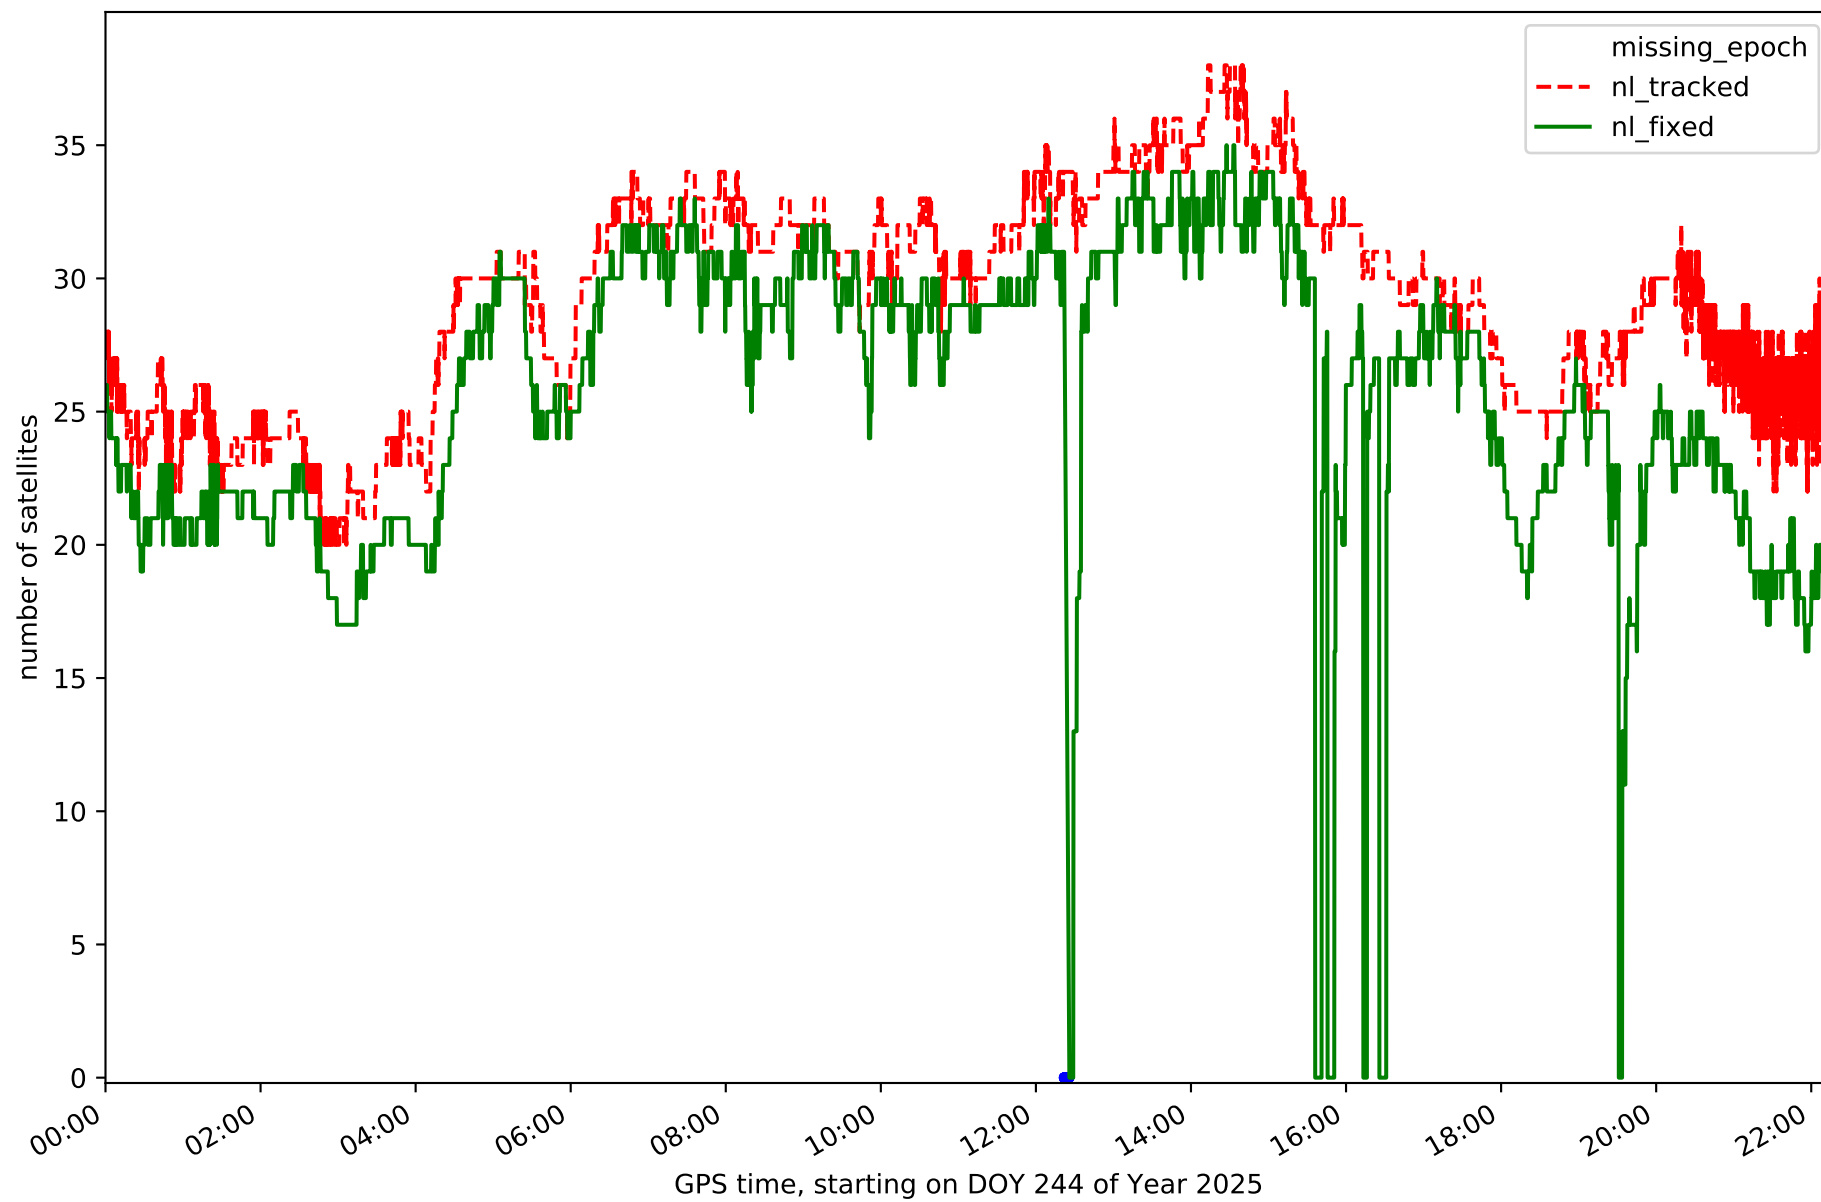


Station LRES in network N32T

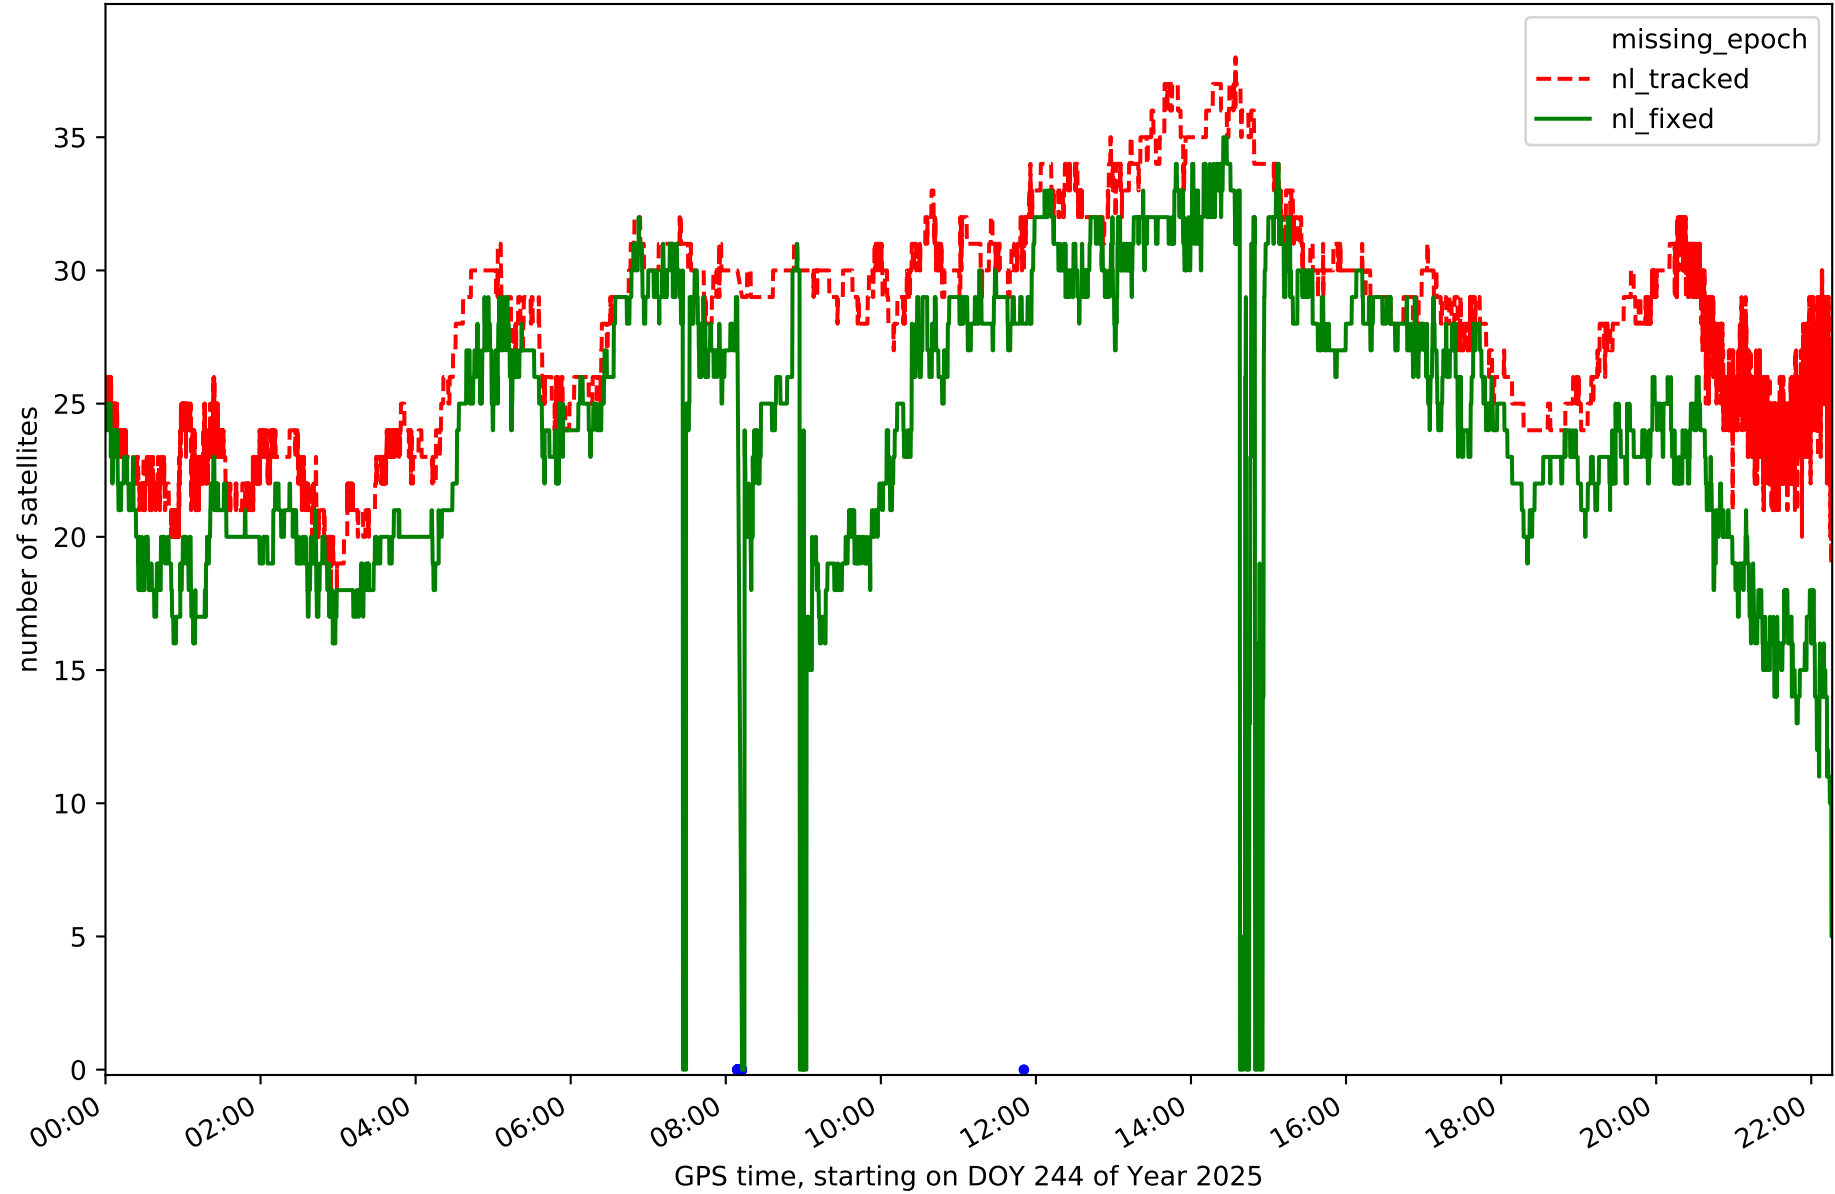


Station TN01 in network N32T

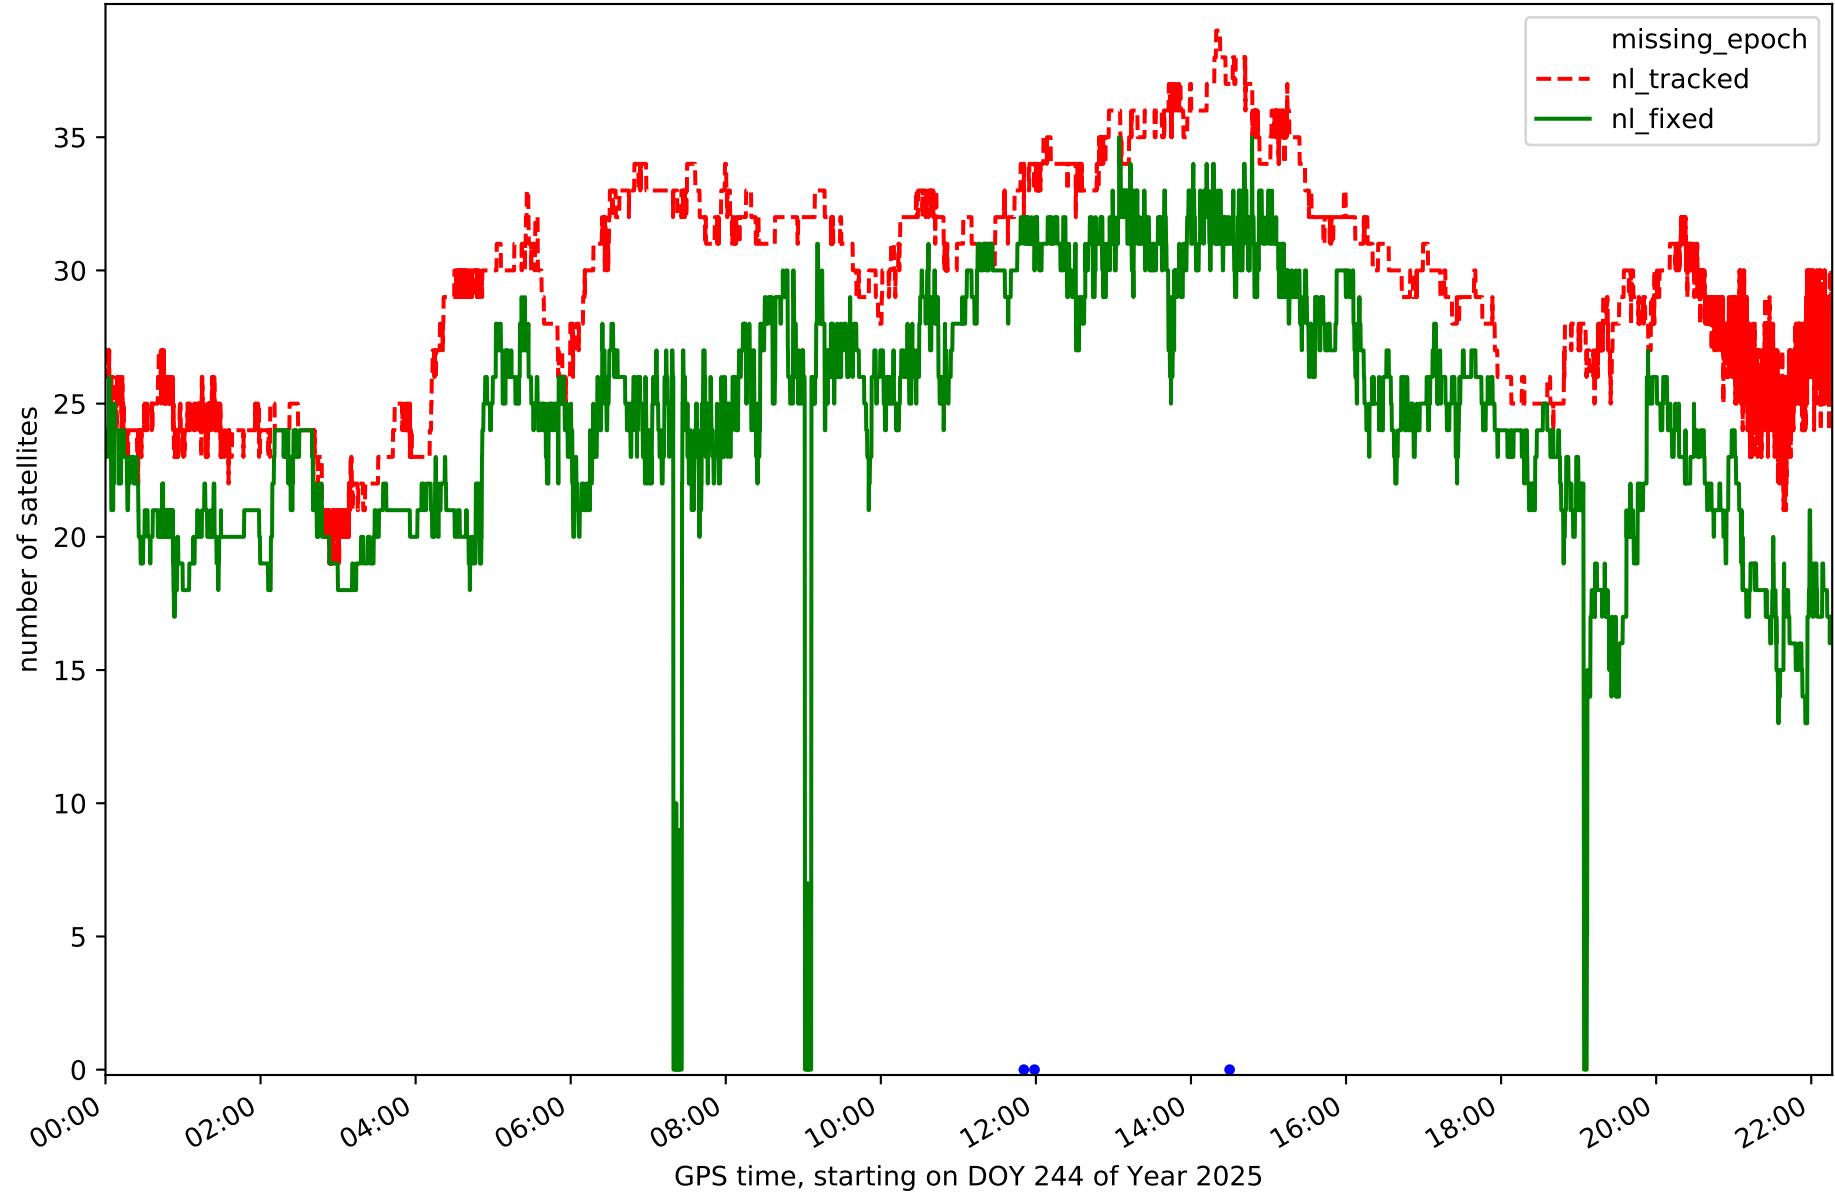


Station TN02 in network N32T

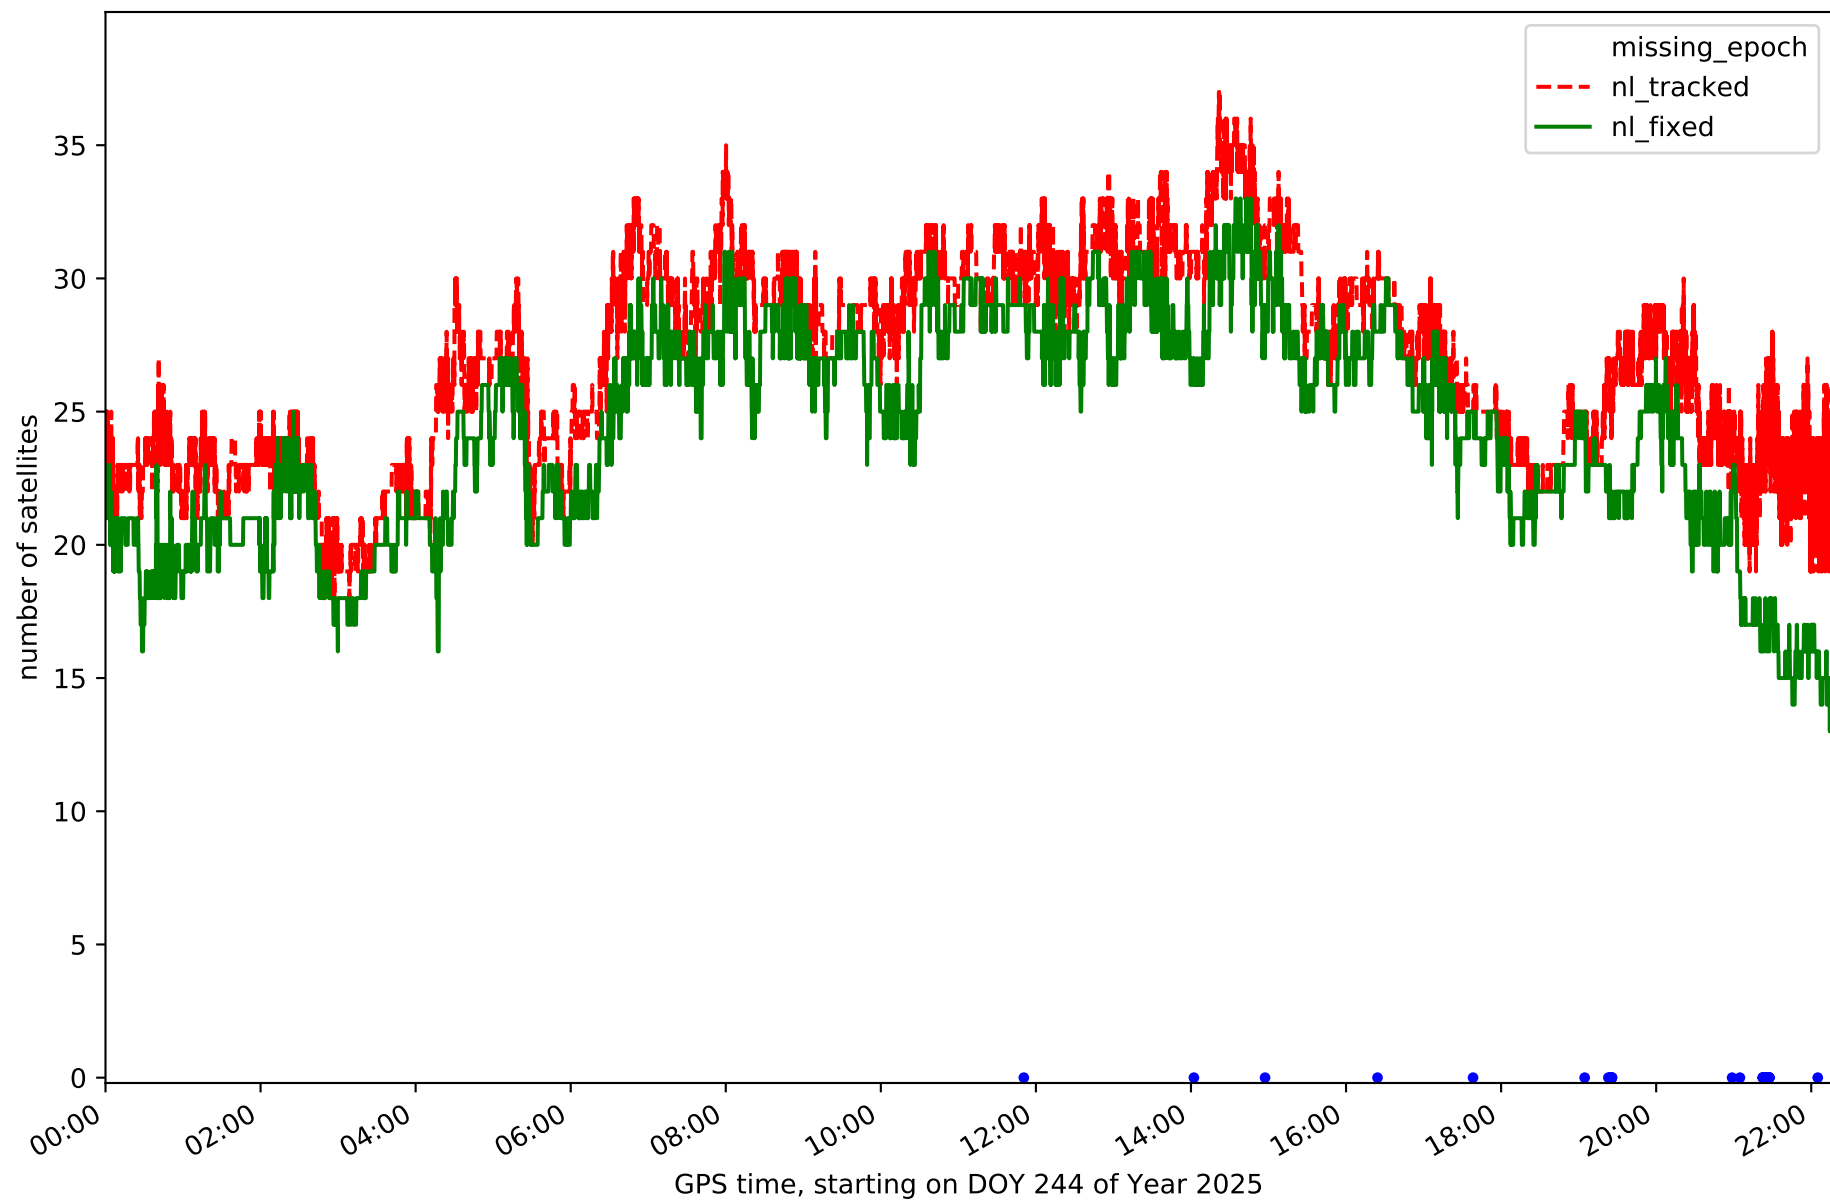


Station TN03 in network N32T

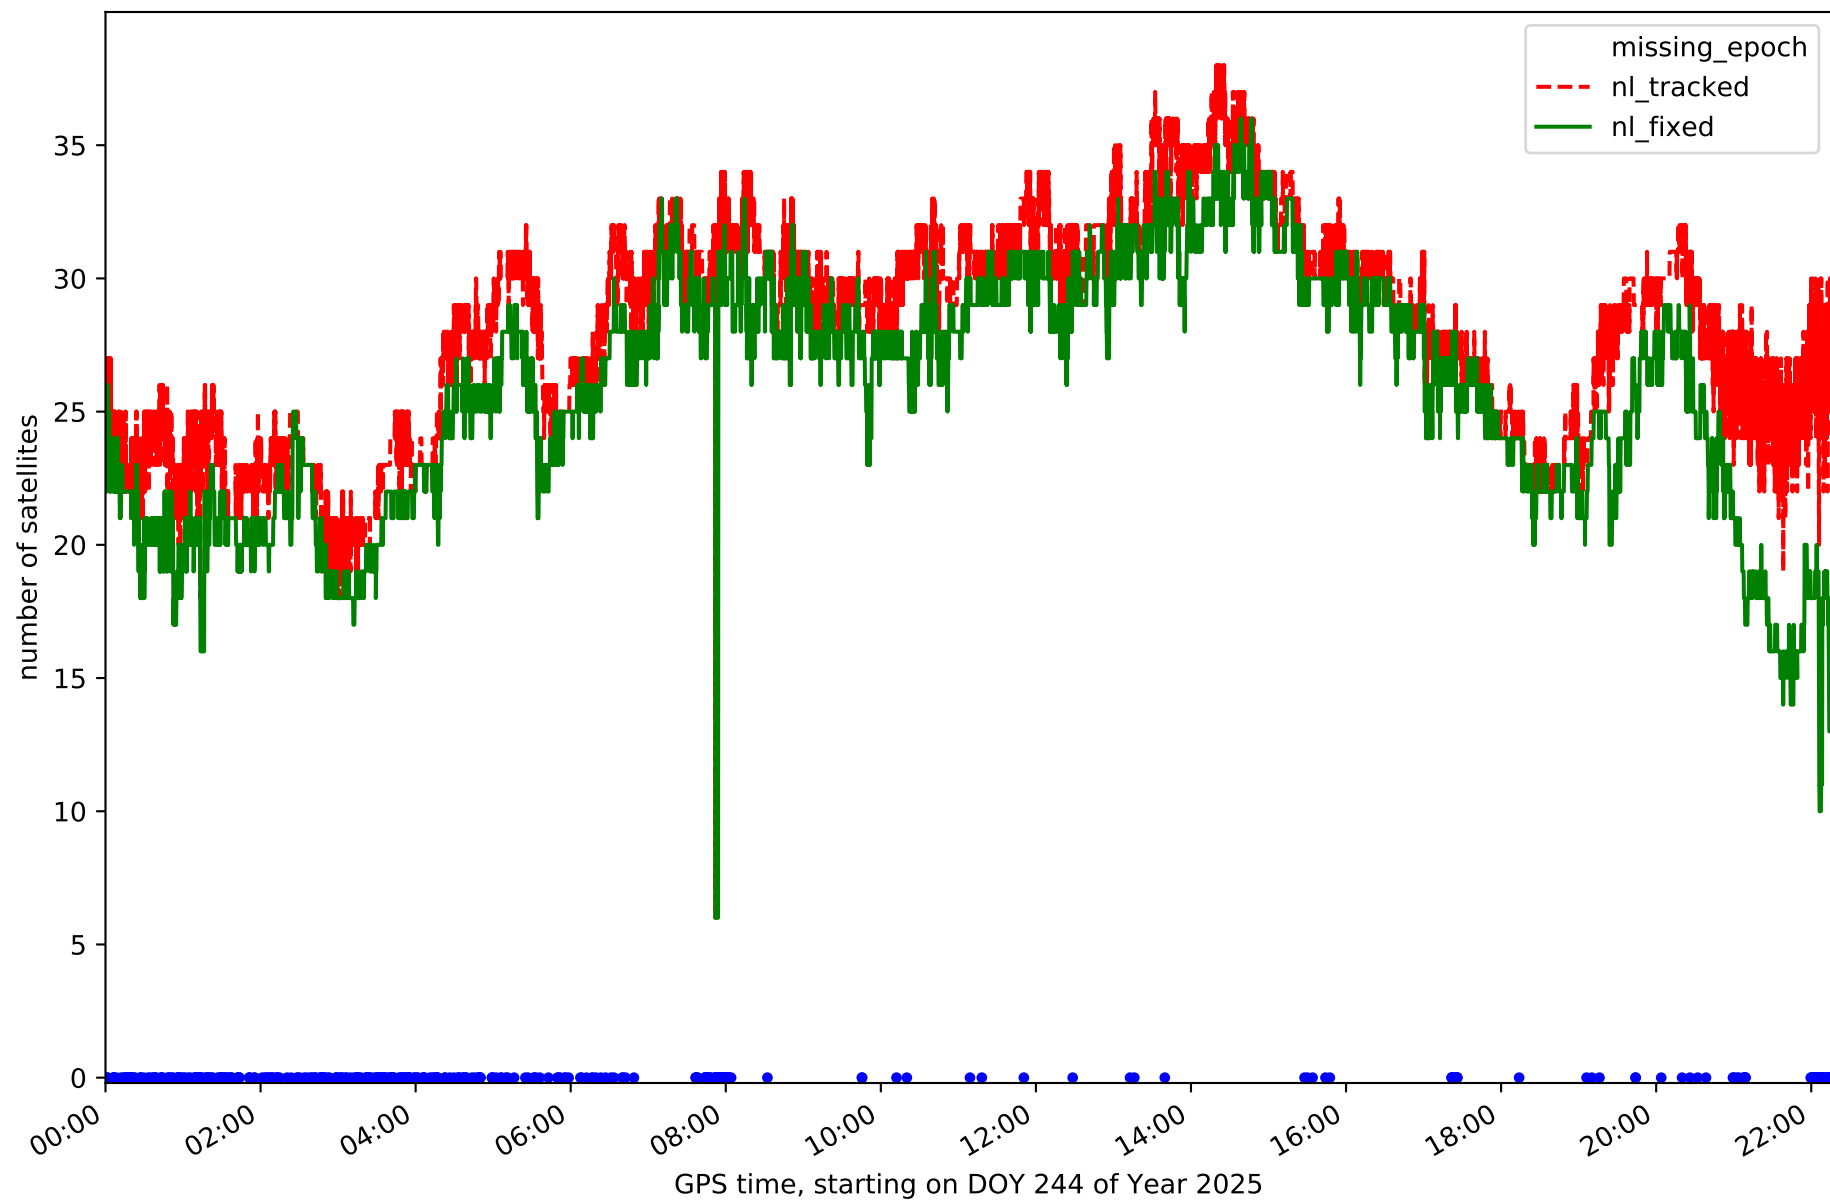


Station TN04 in network N32T

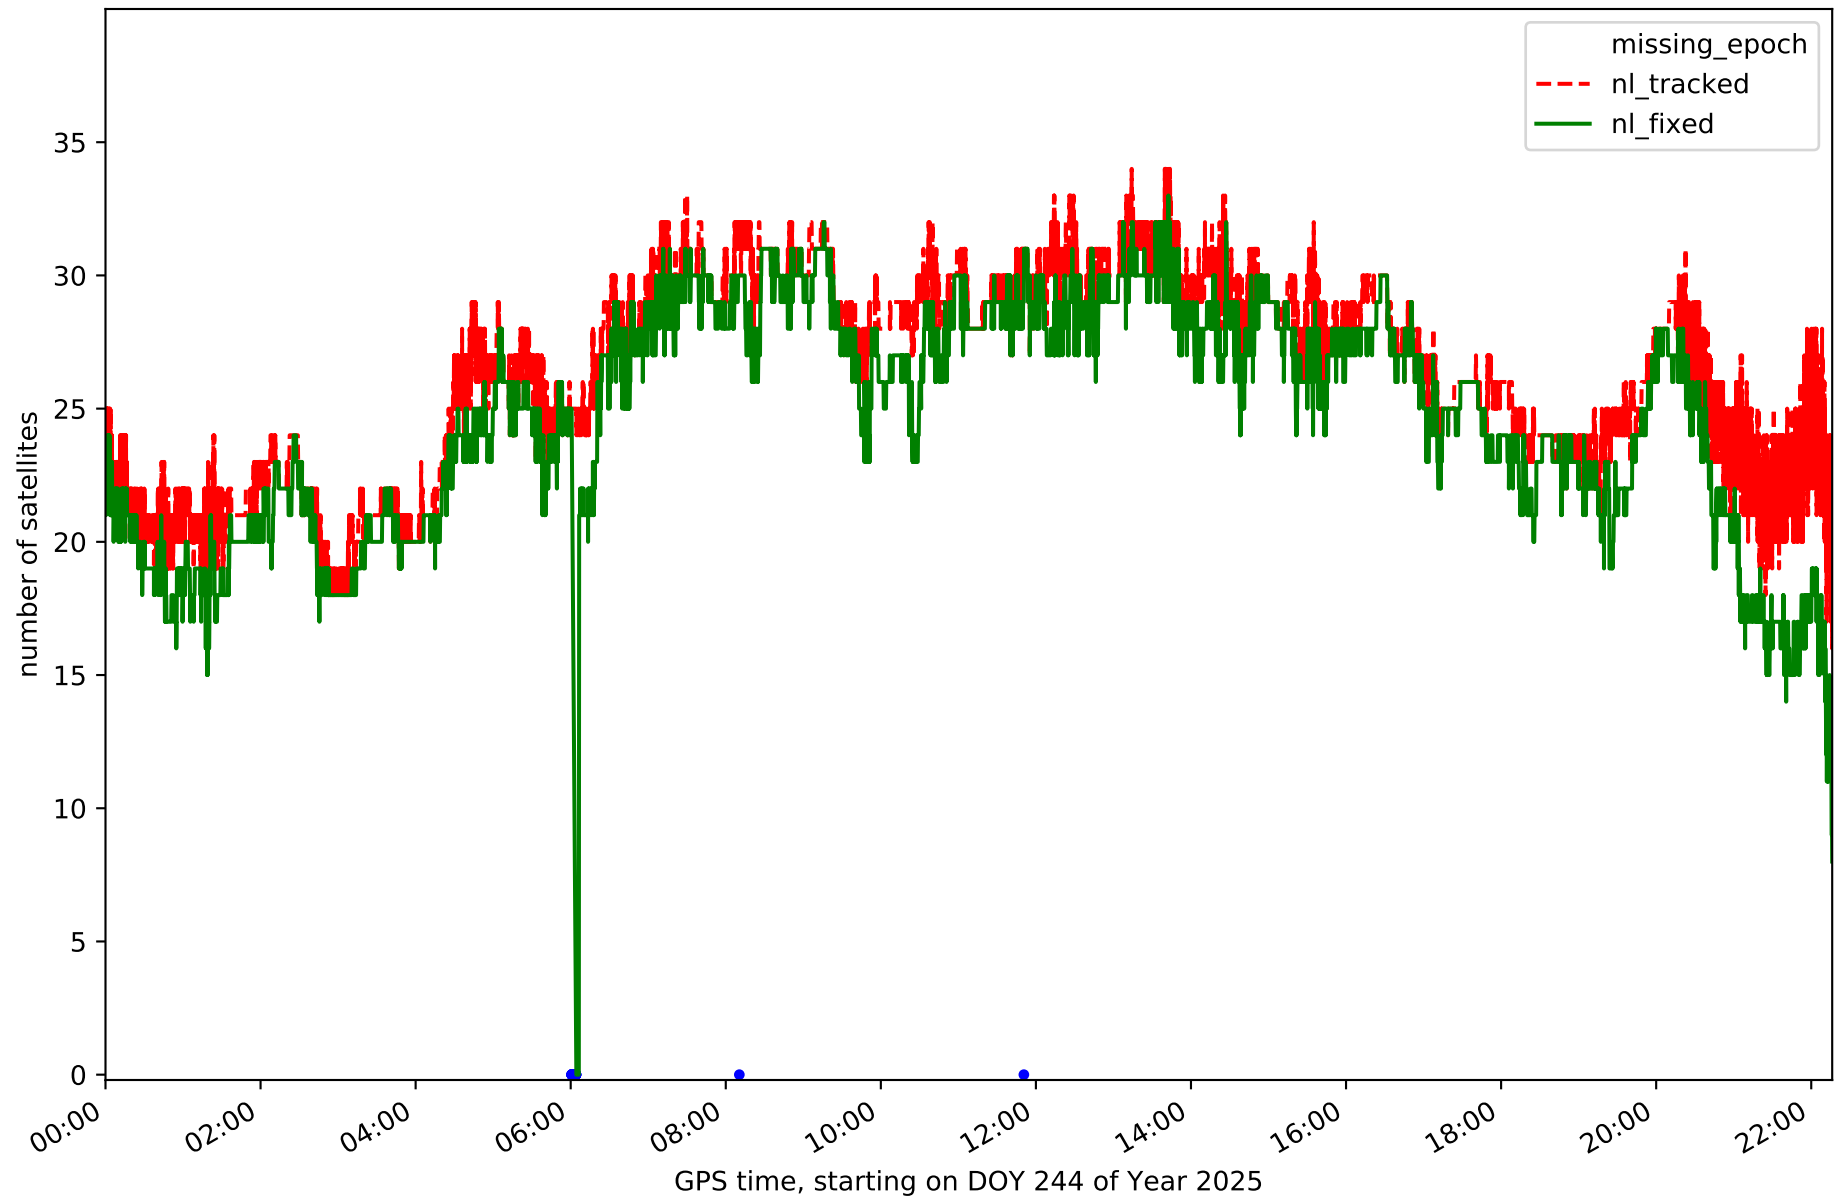


Station TN06 in network N32T

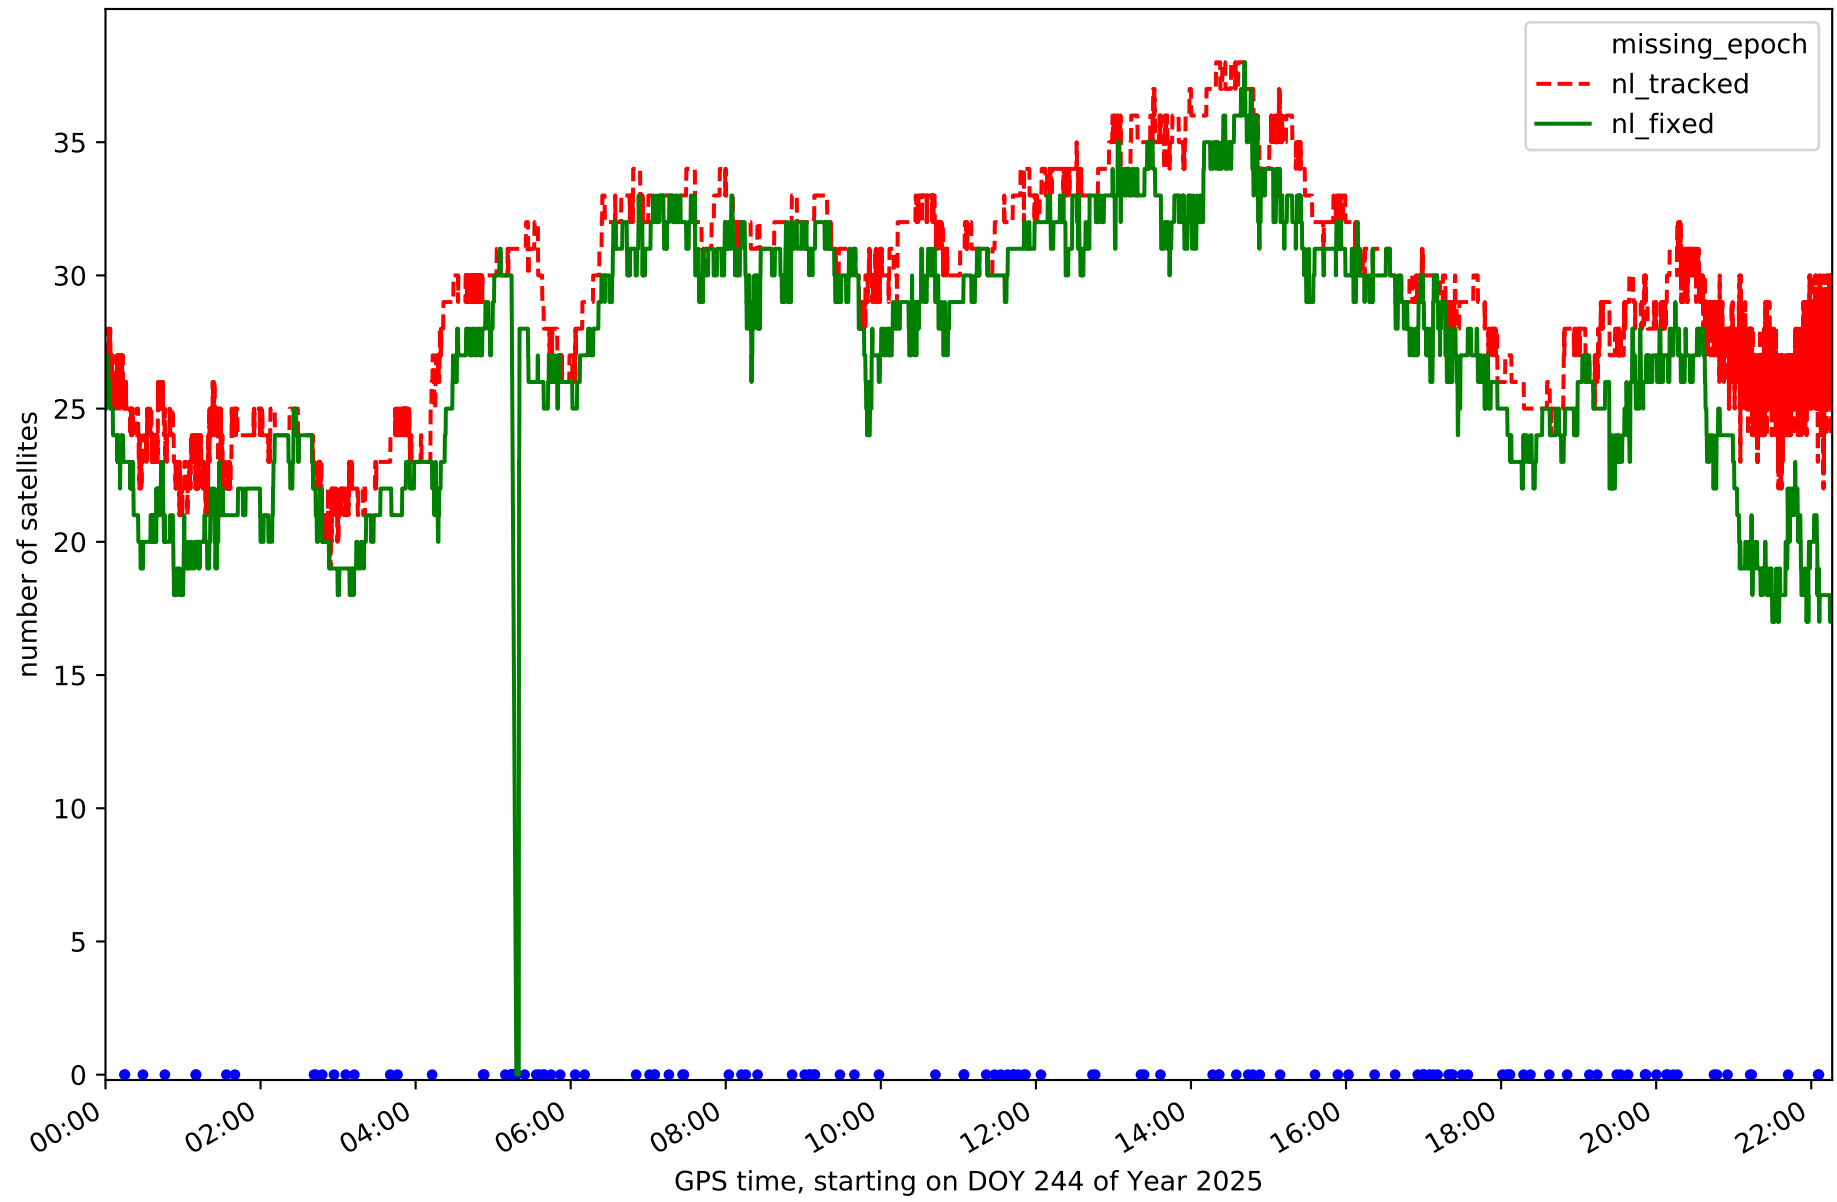


Station TN09 in network N32T

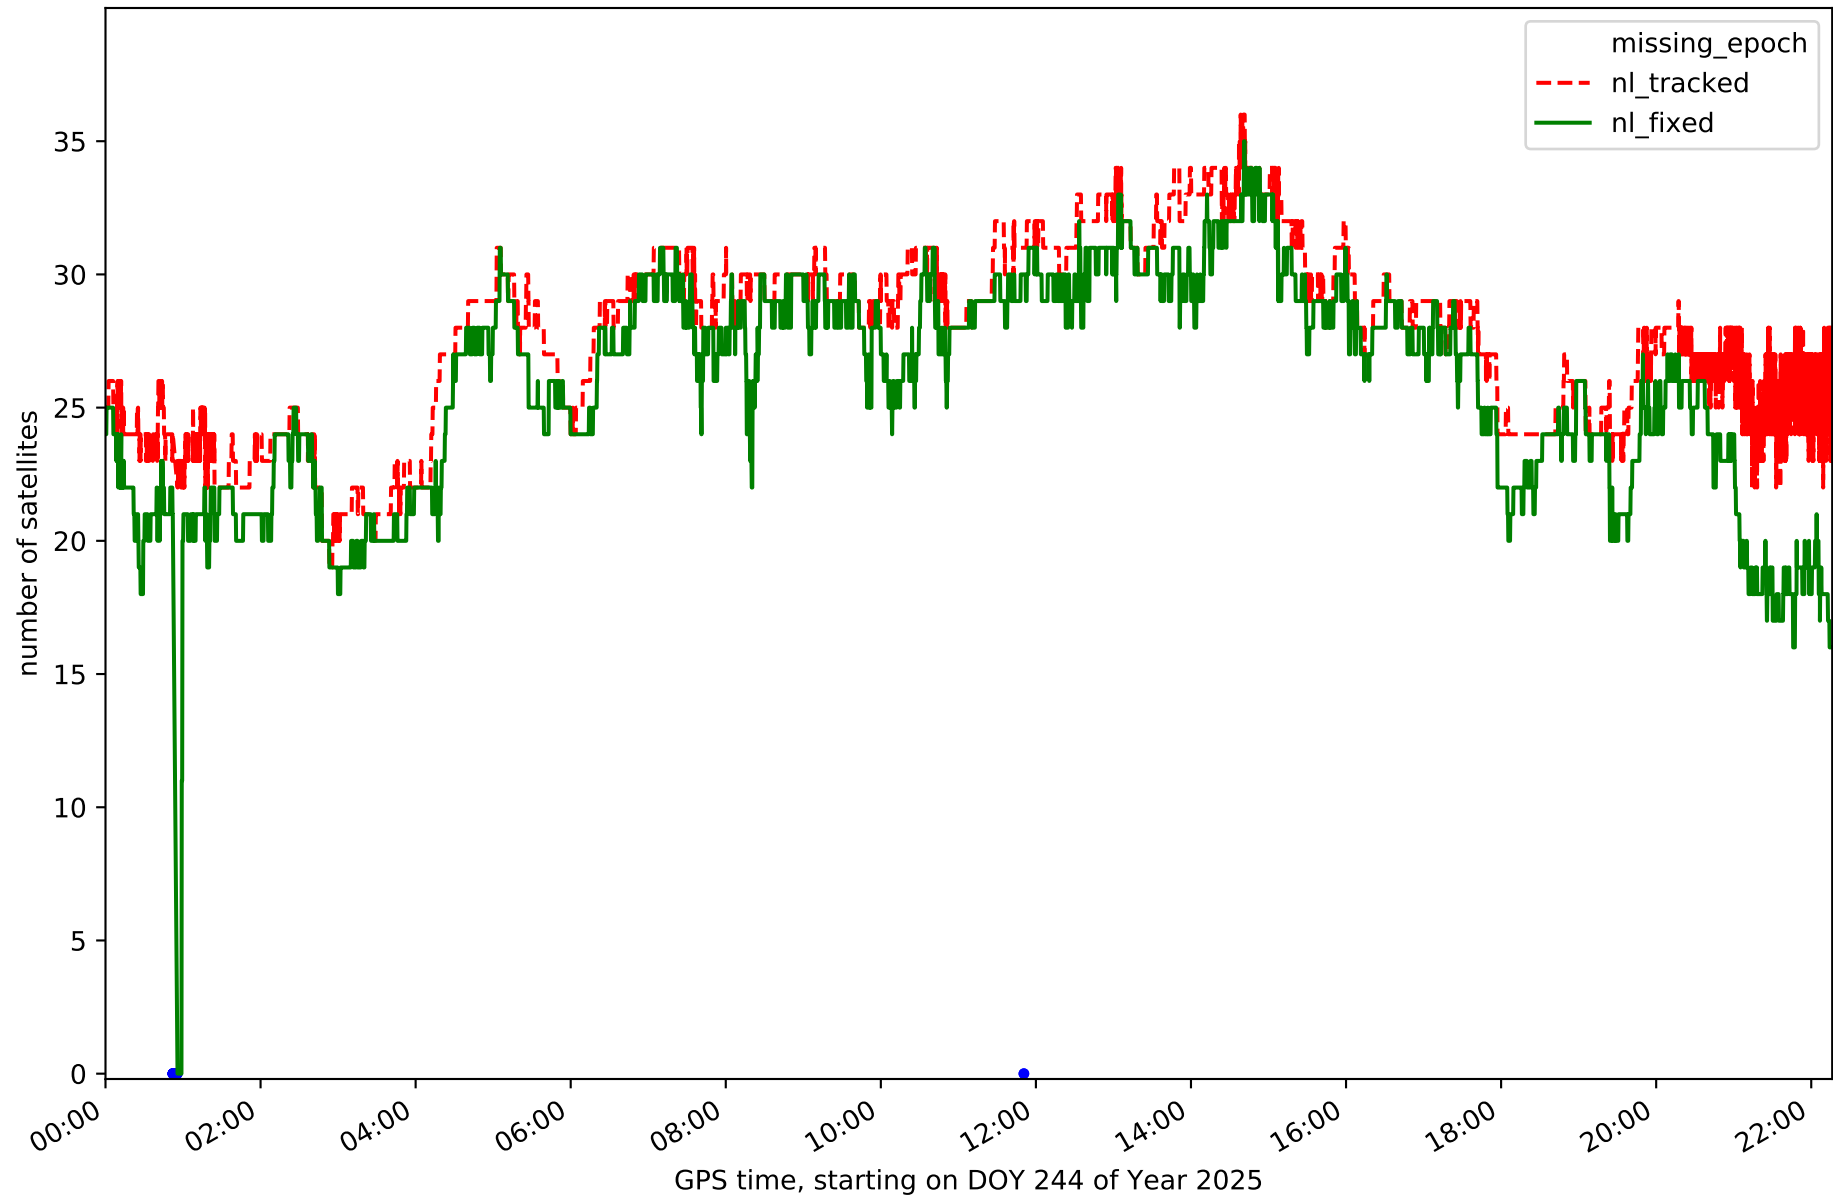


Station TE11 in network N32T

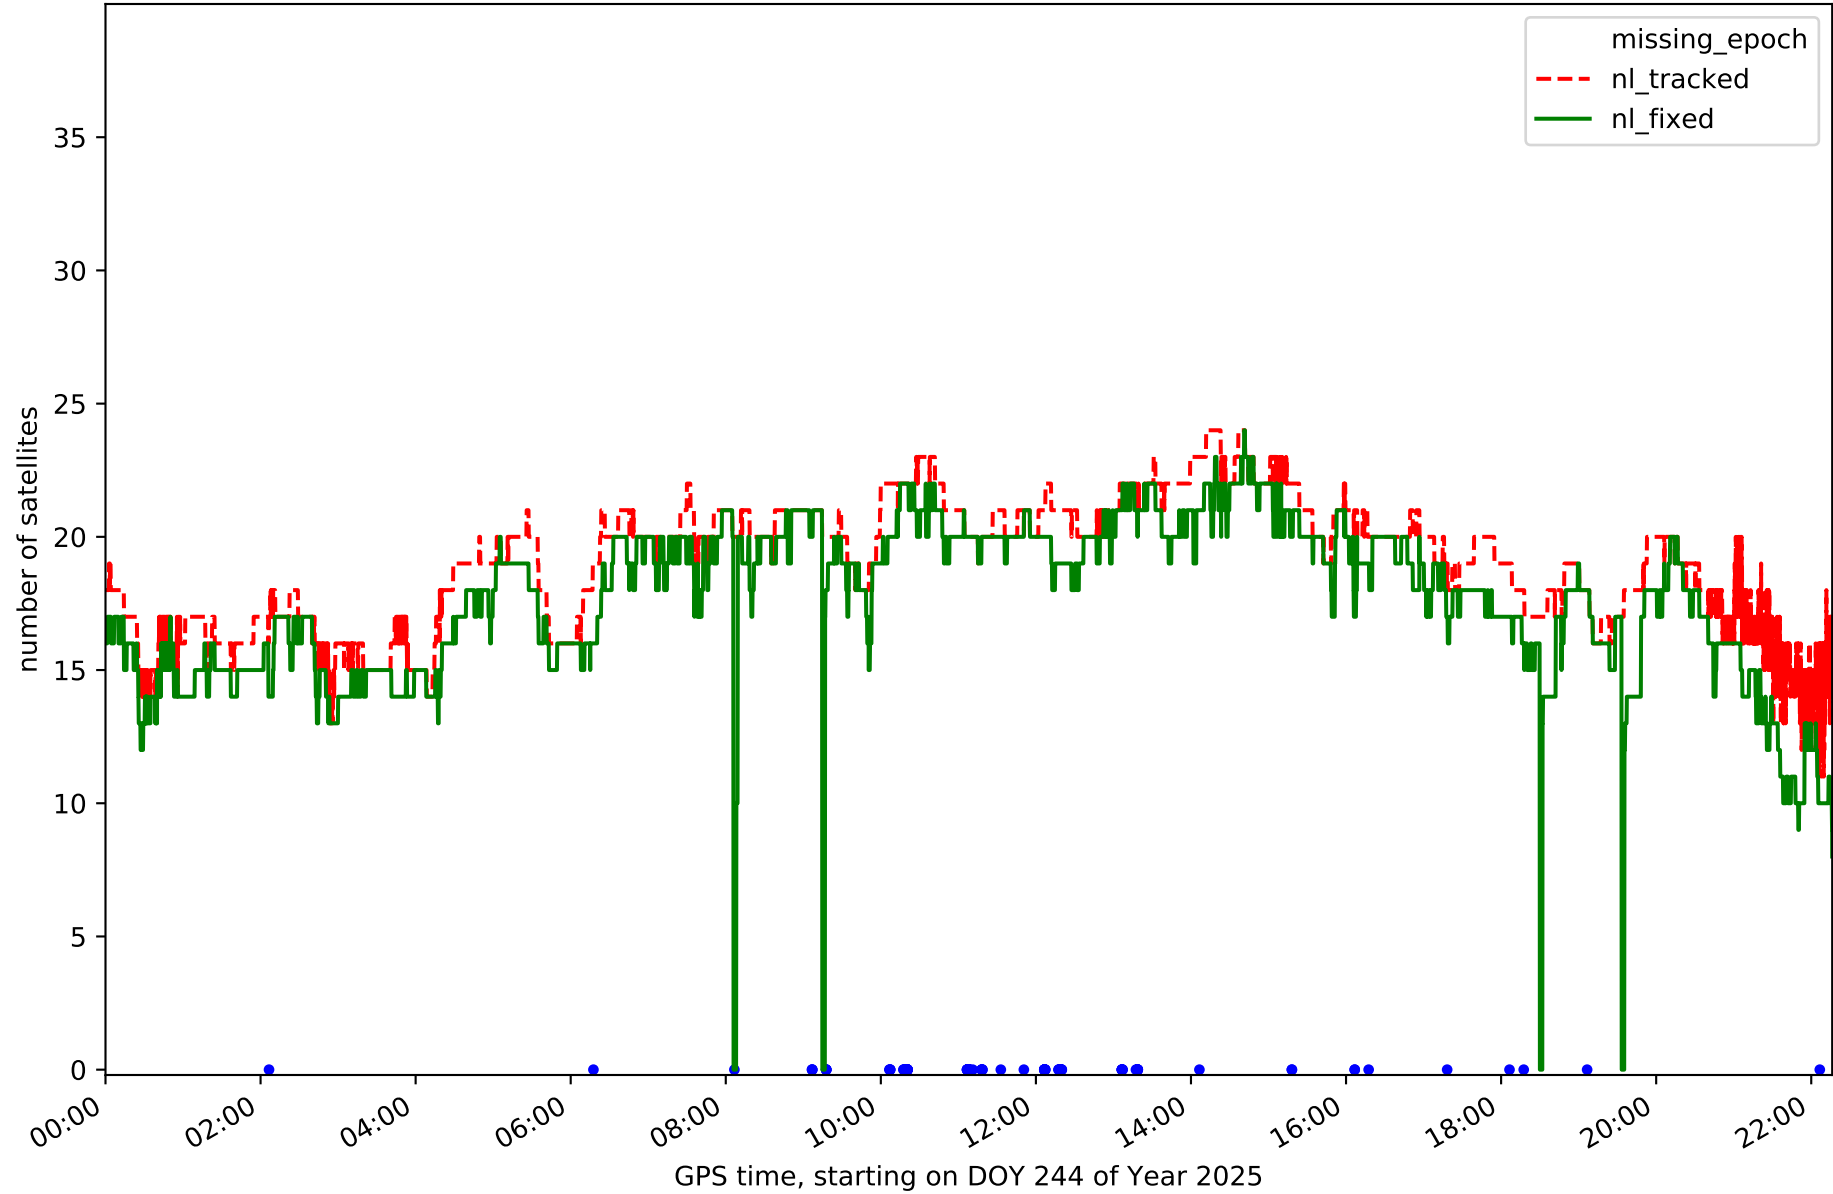


RefCheck for station EH01 in network N32T

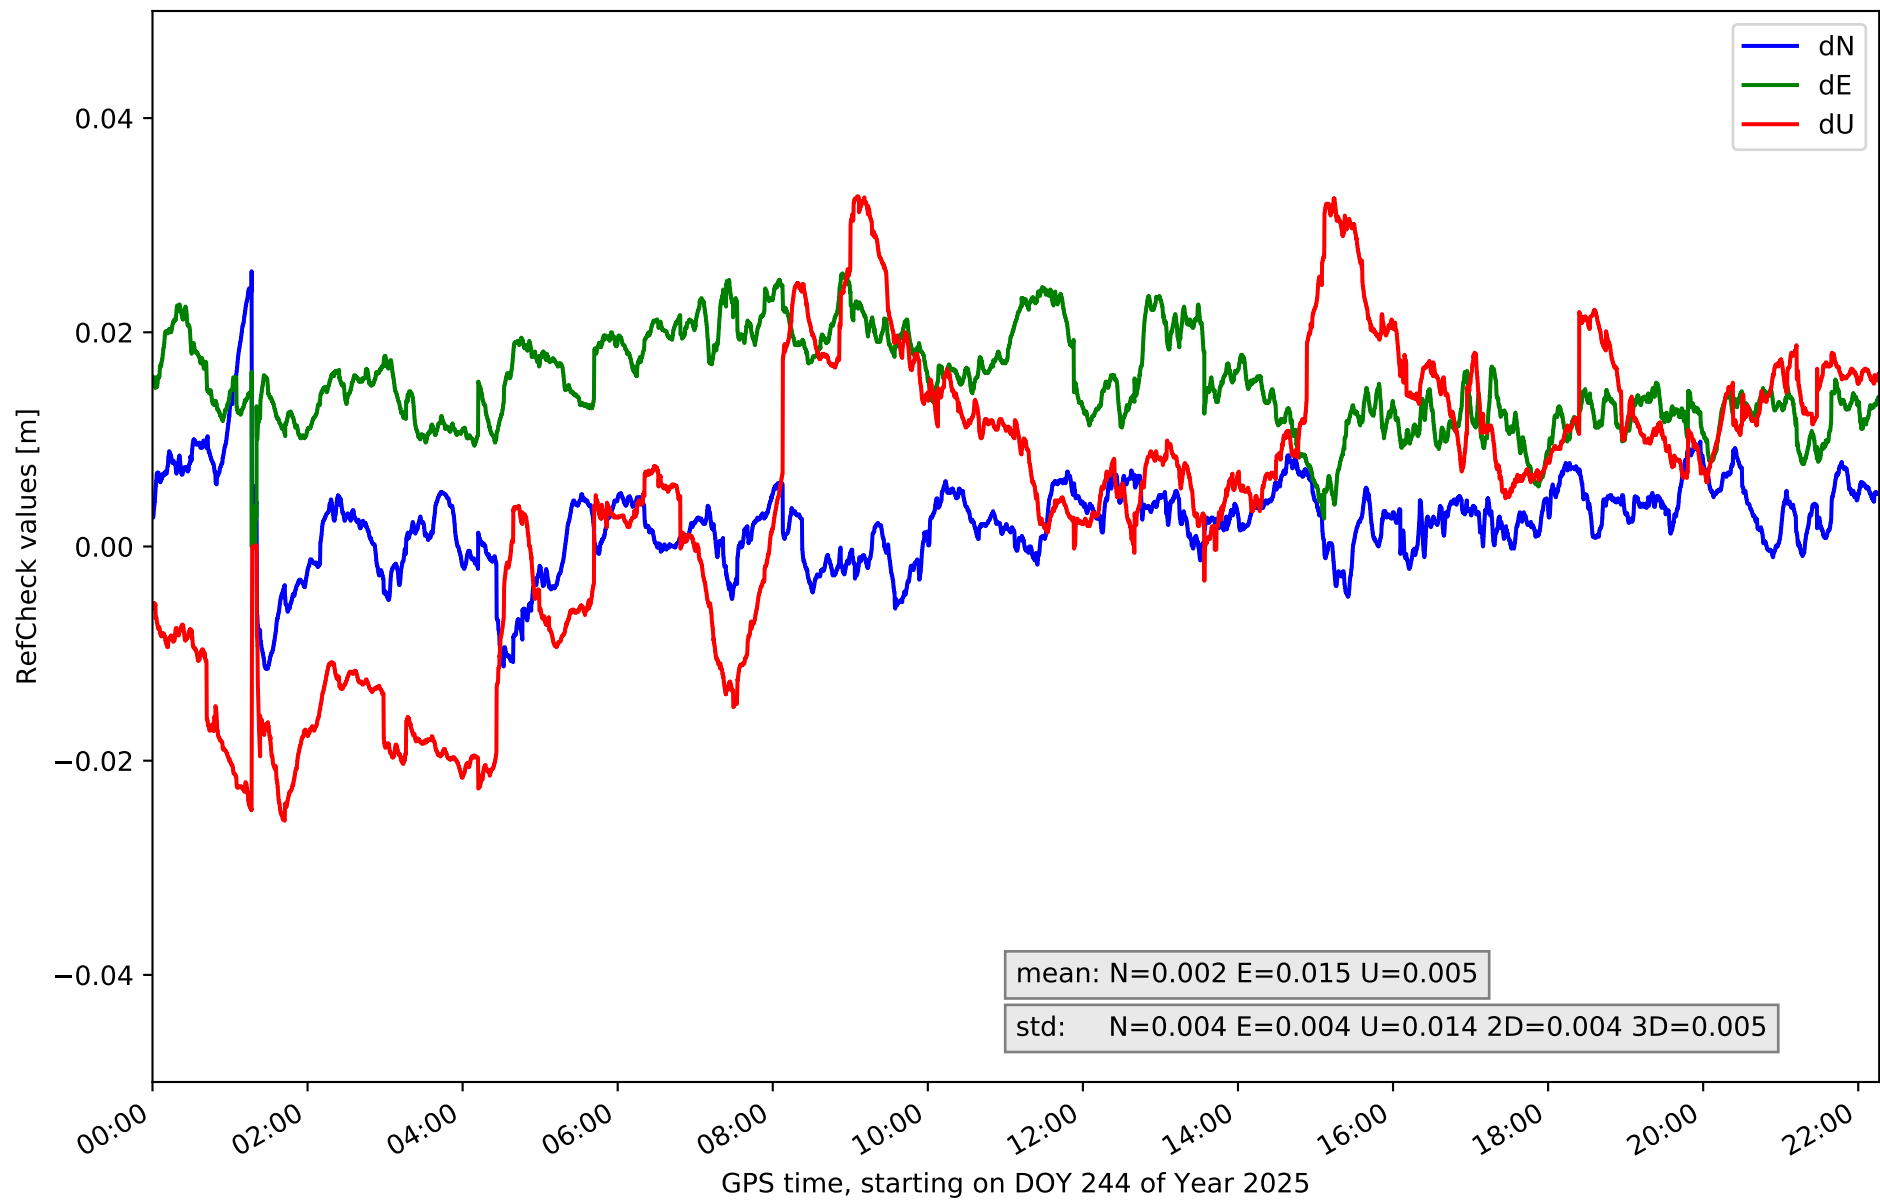


RefCheck for station EH02 in network N32T

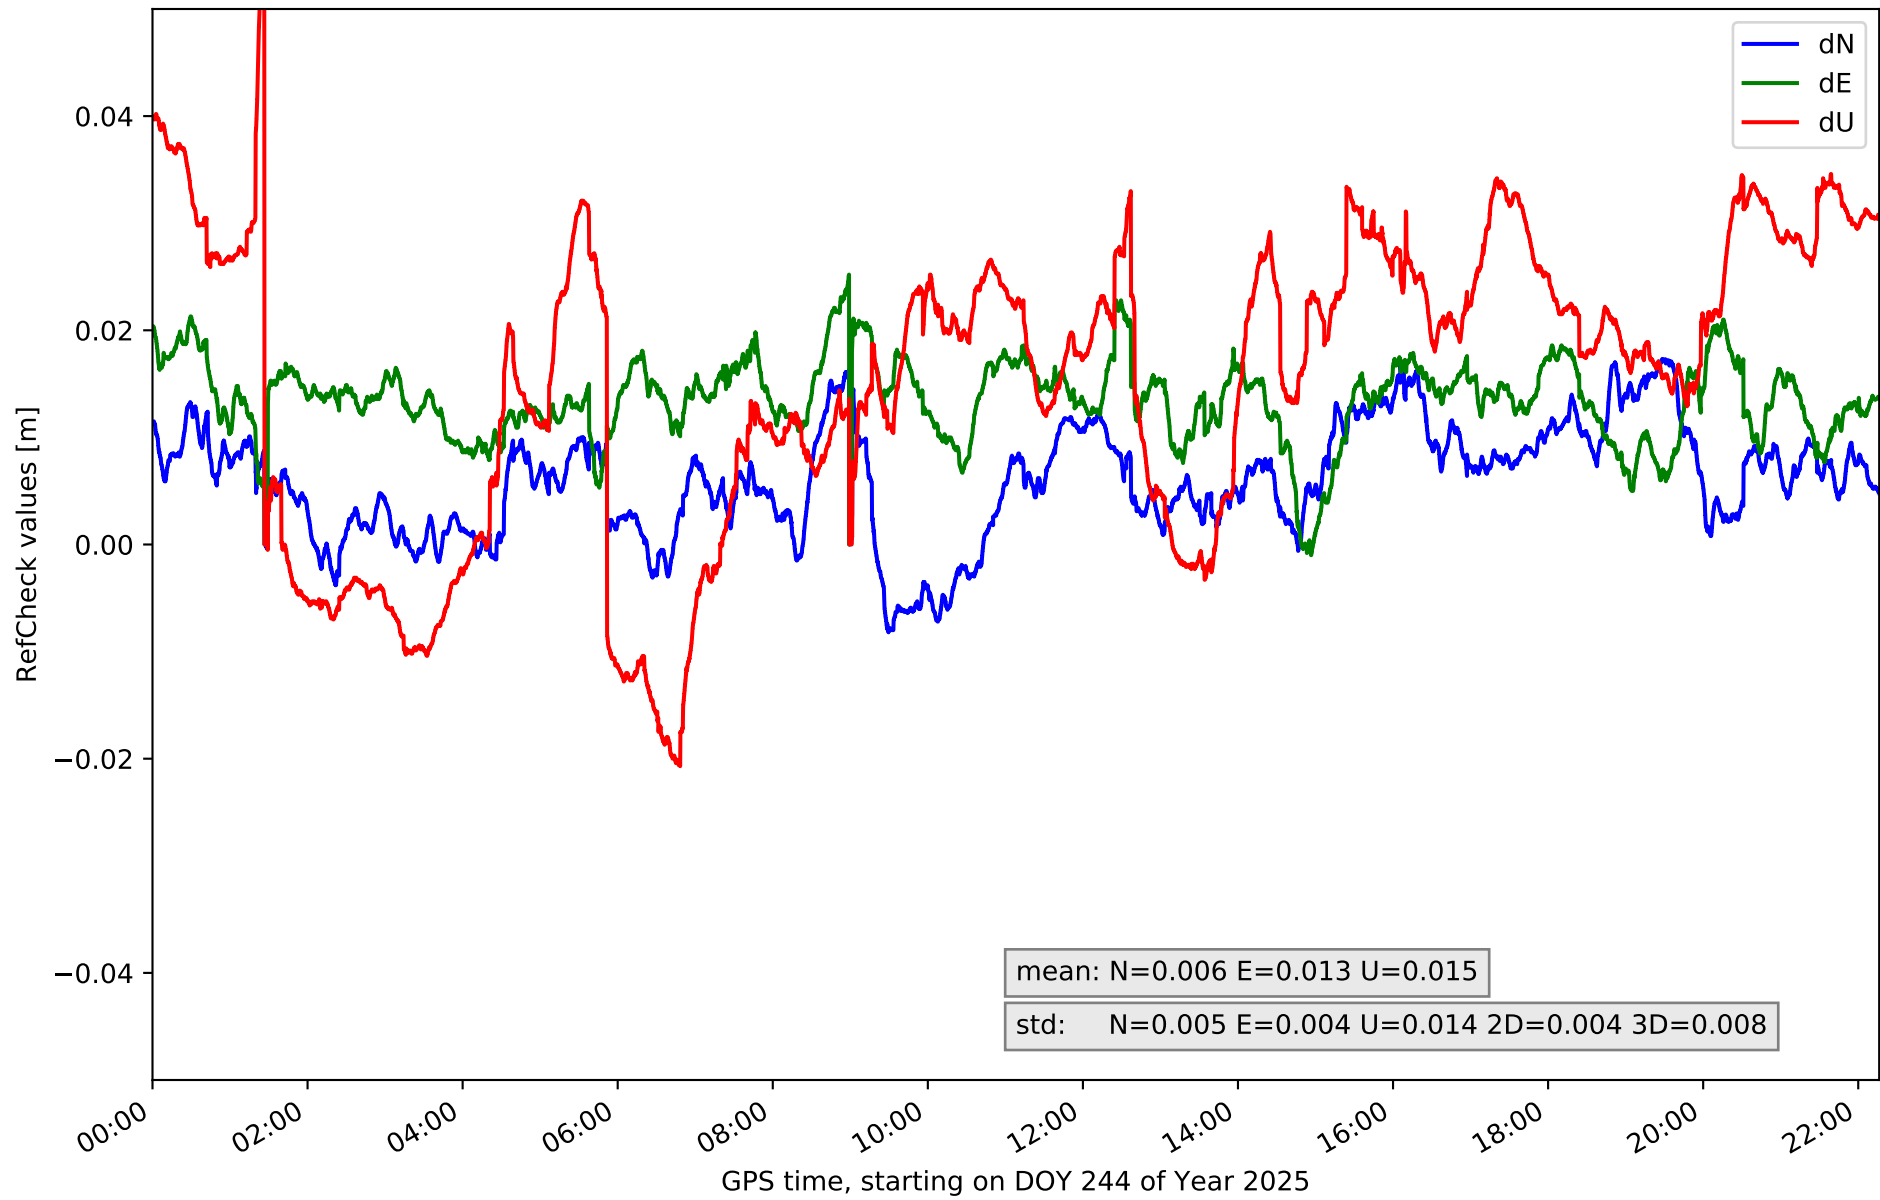


RefCheck for station GOM1 in network N32T

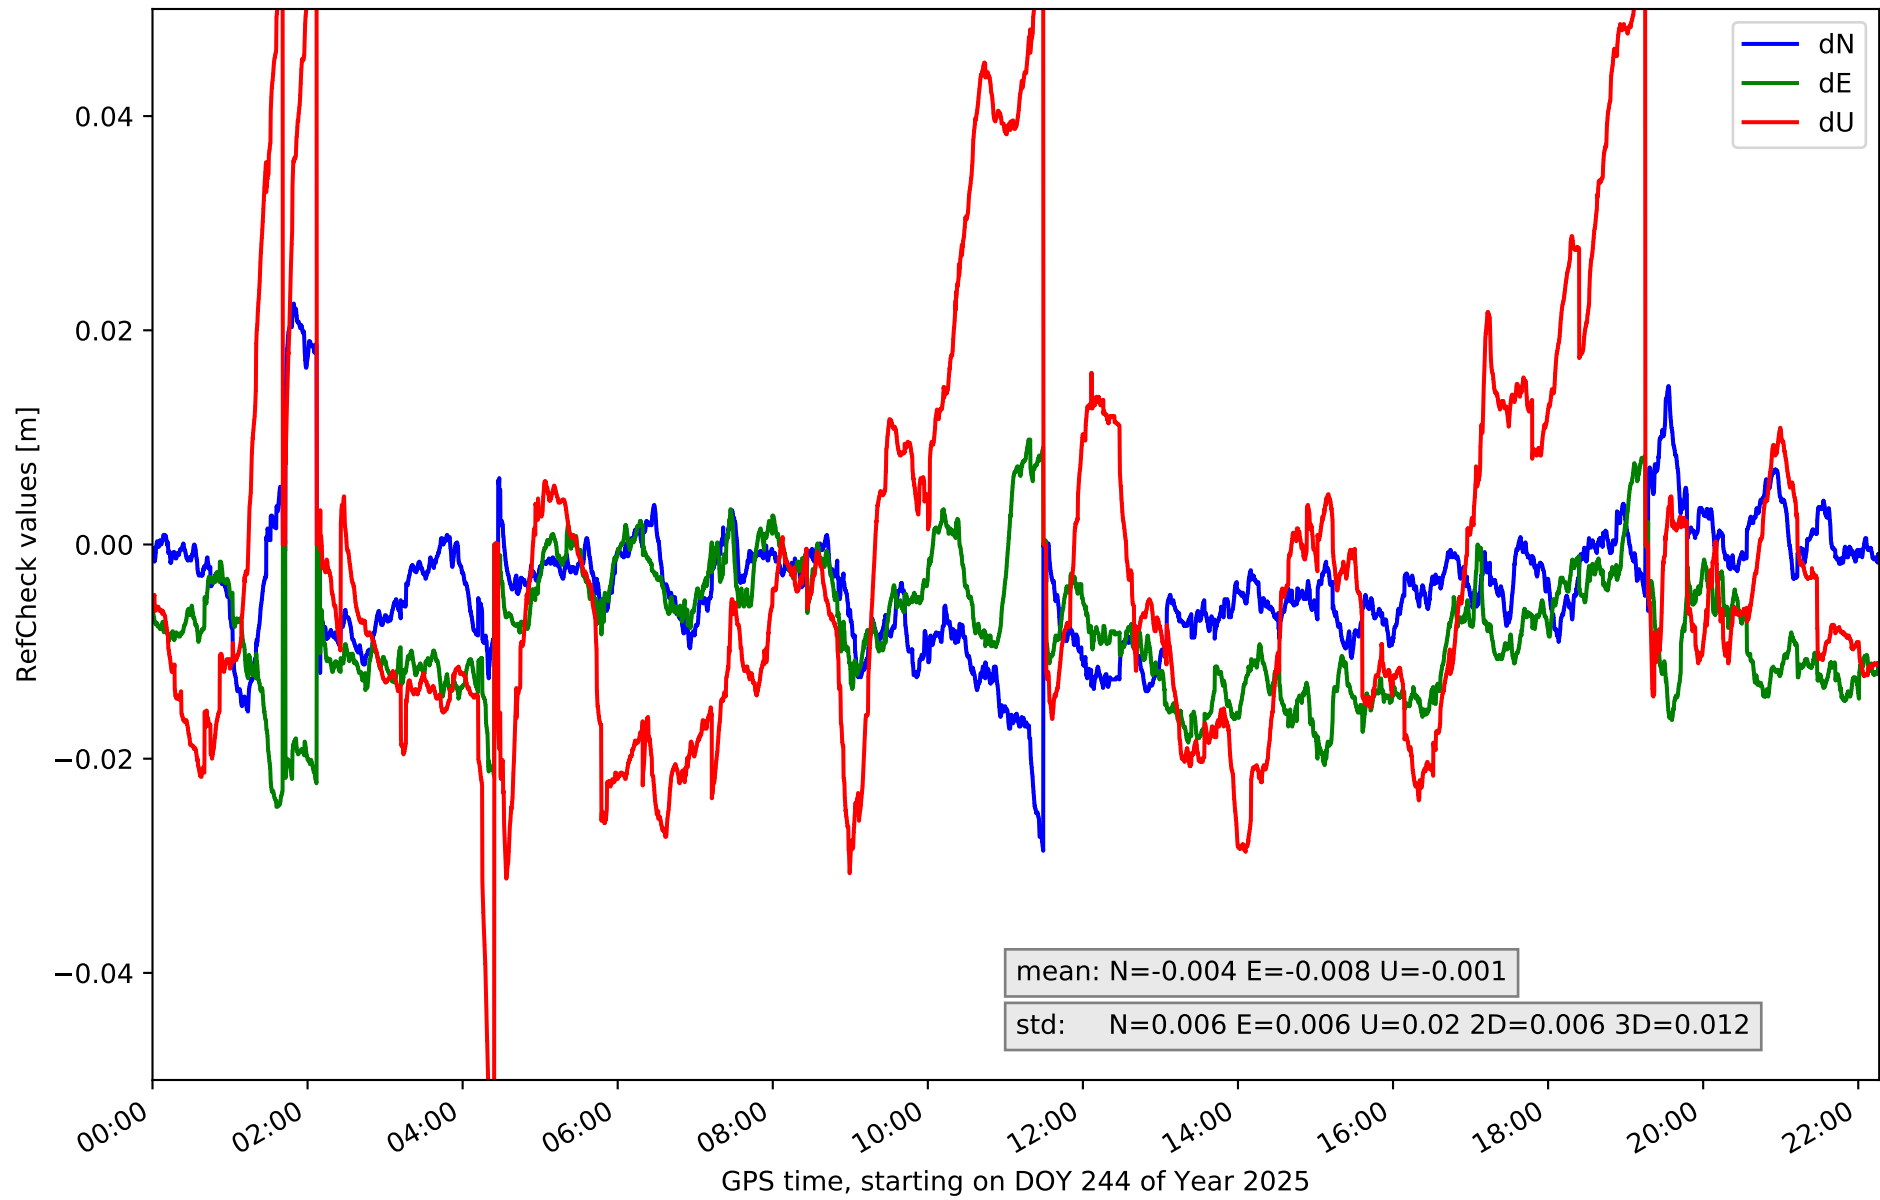


RefCheck for station IZAN in network N32T

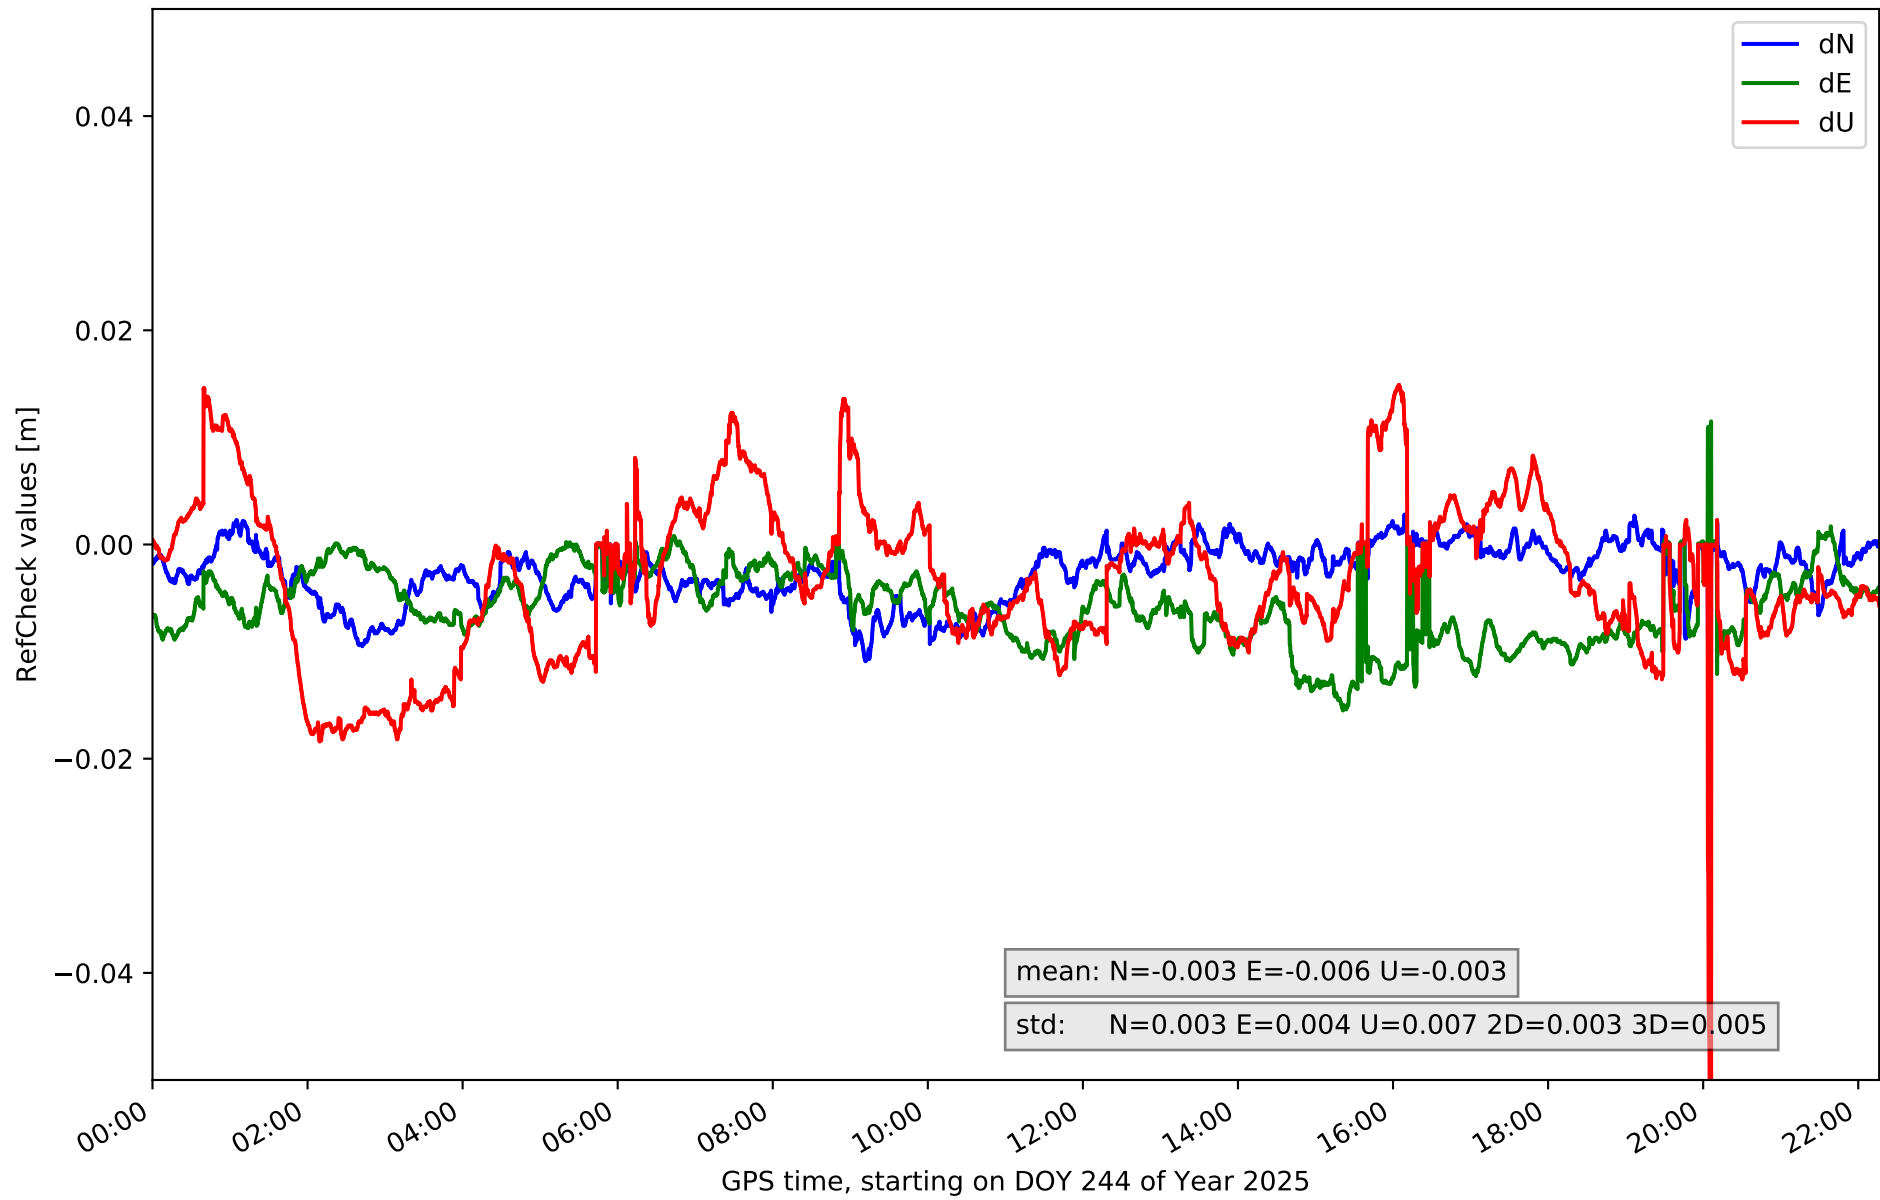


RefCheck for station LP01 in network N32T

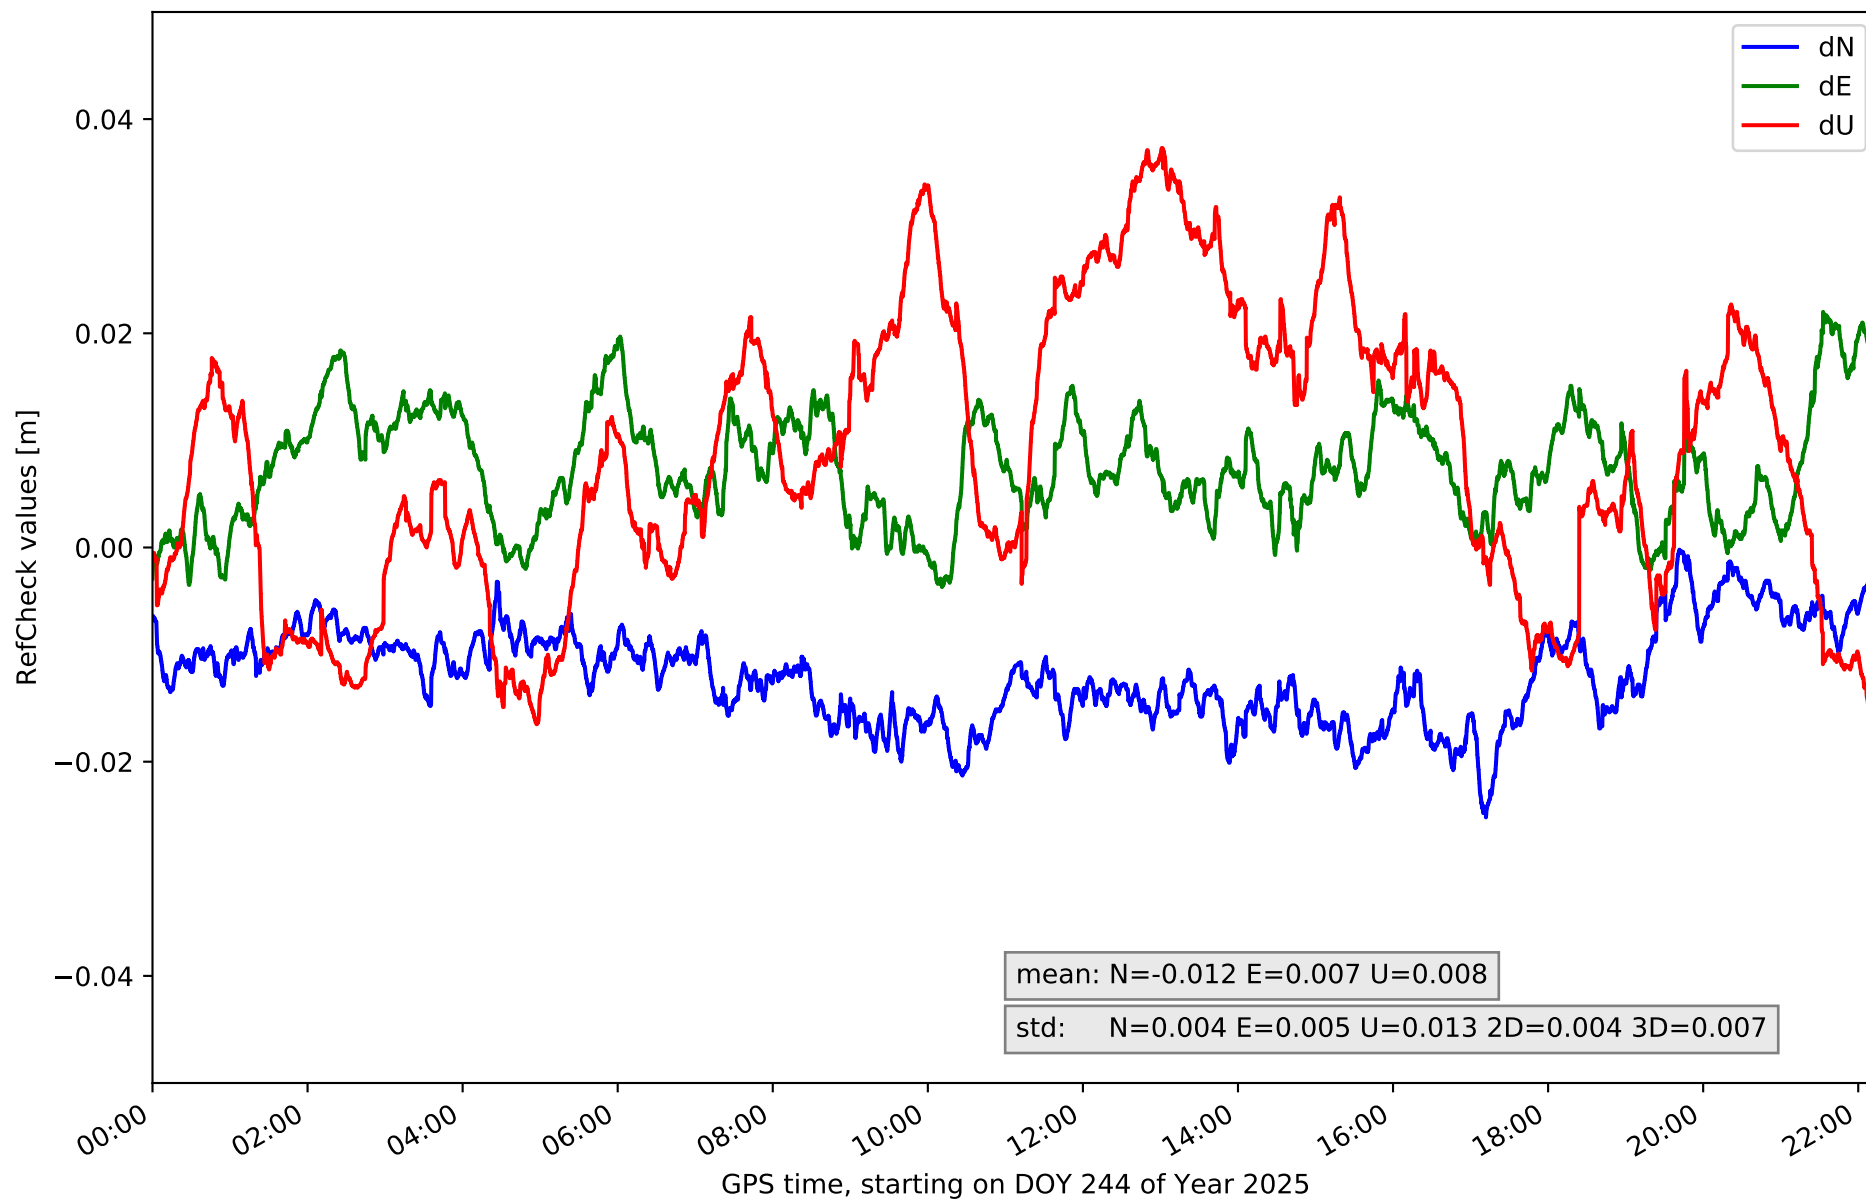


RefCheck for station LP03 in network N32T

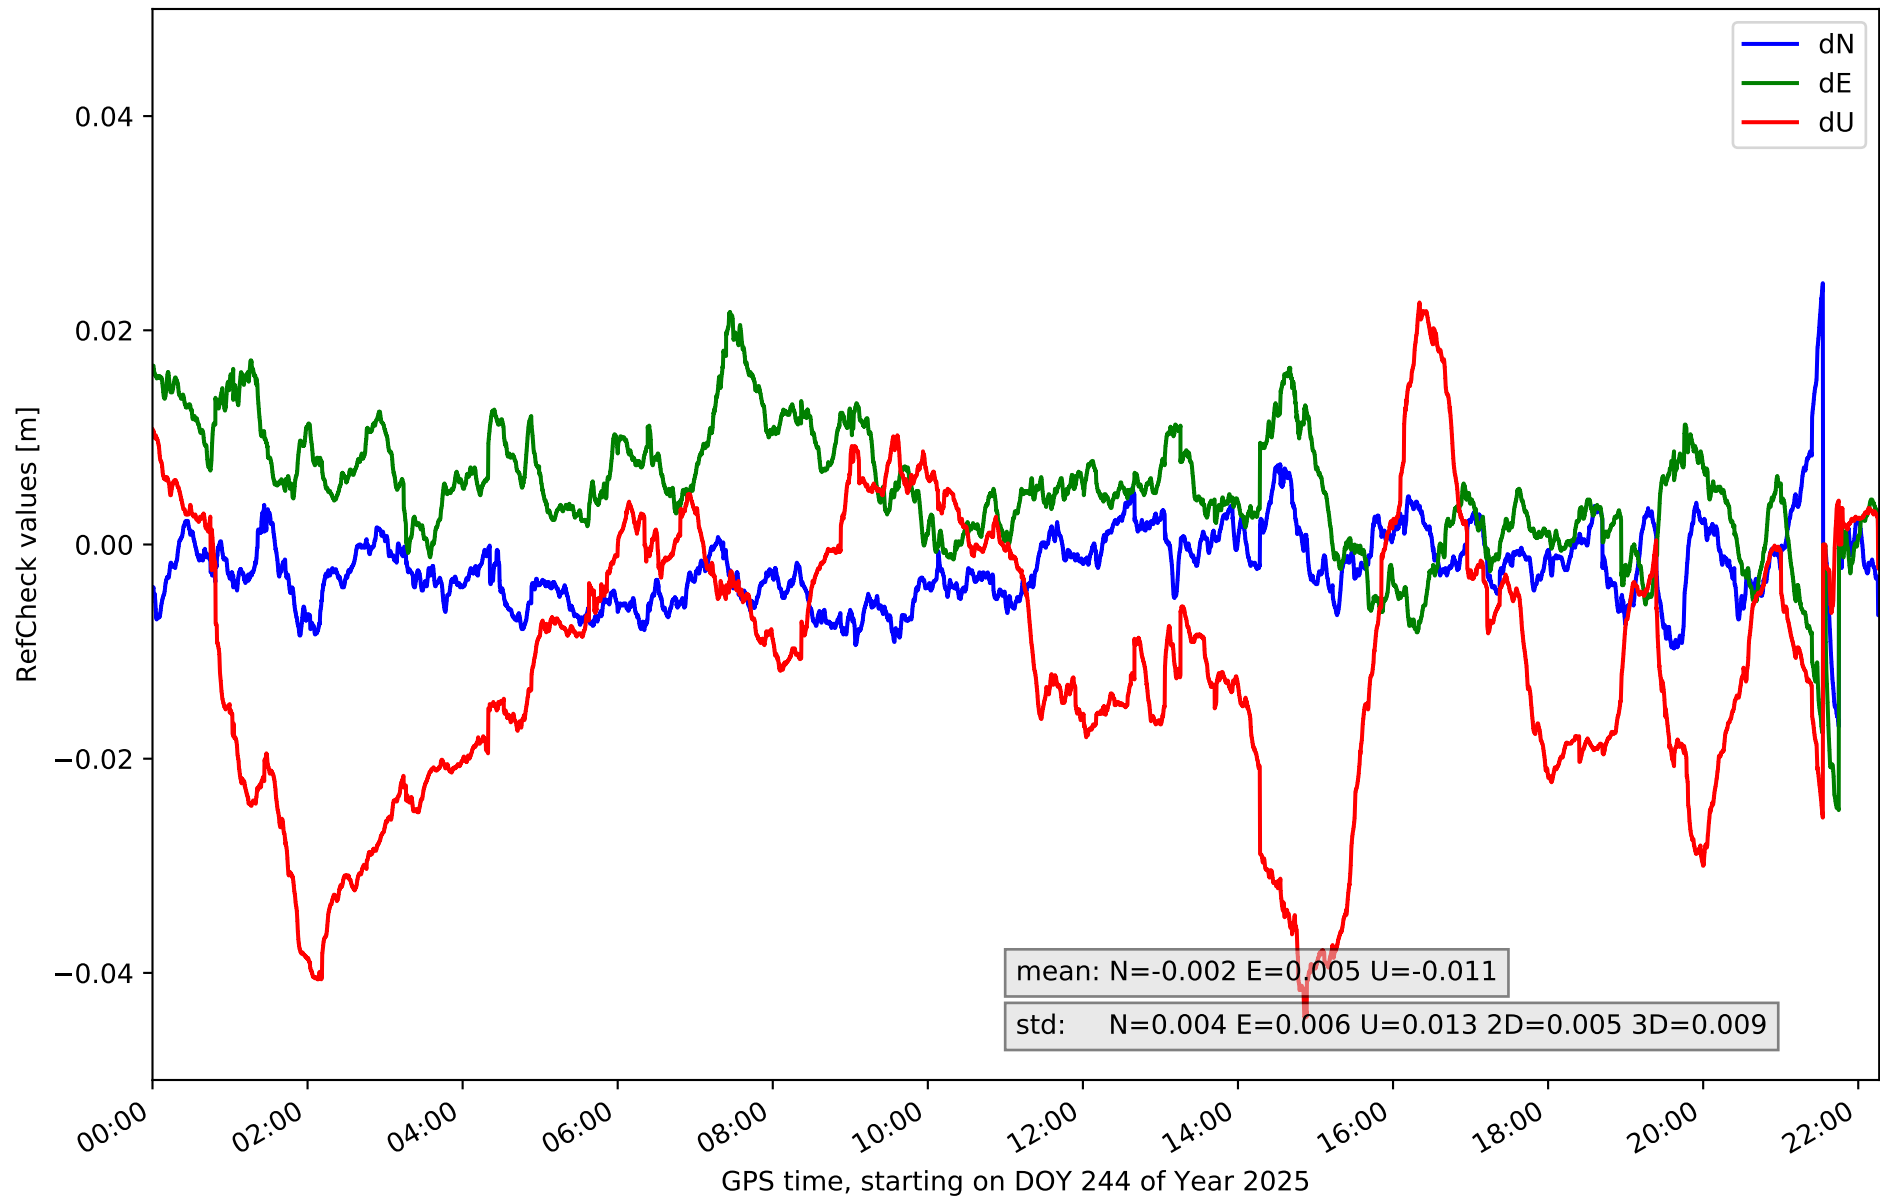


RefCheck for station LPAL in network N32T

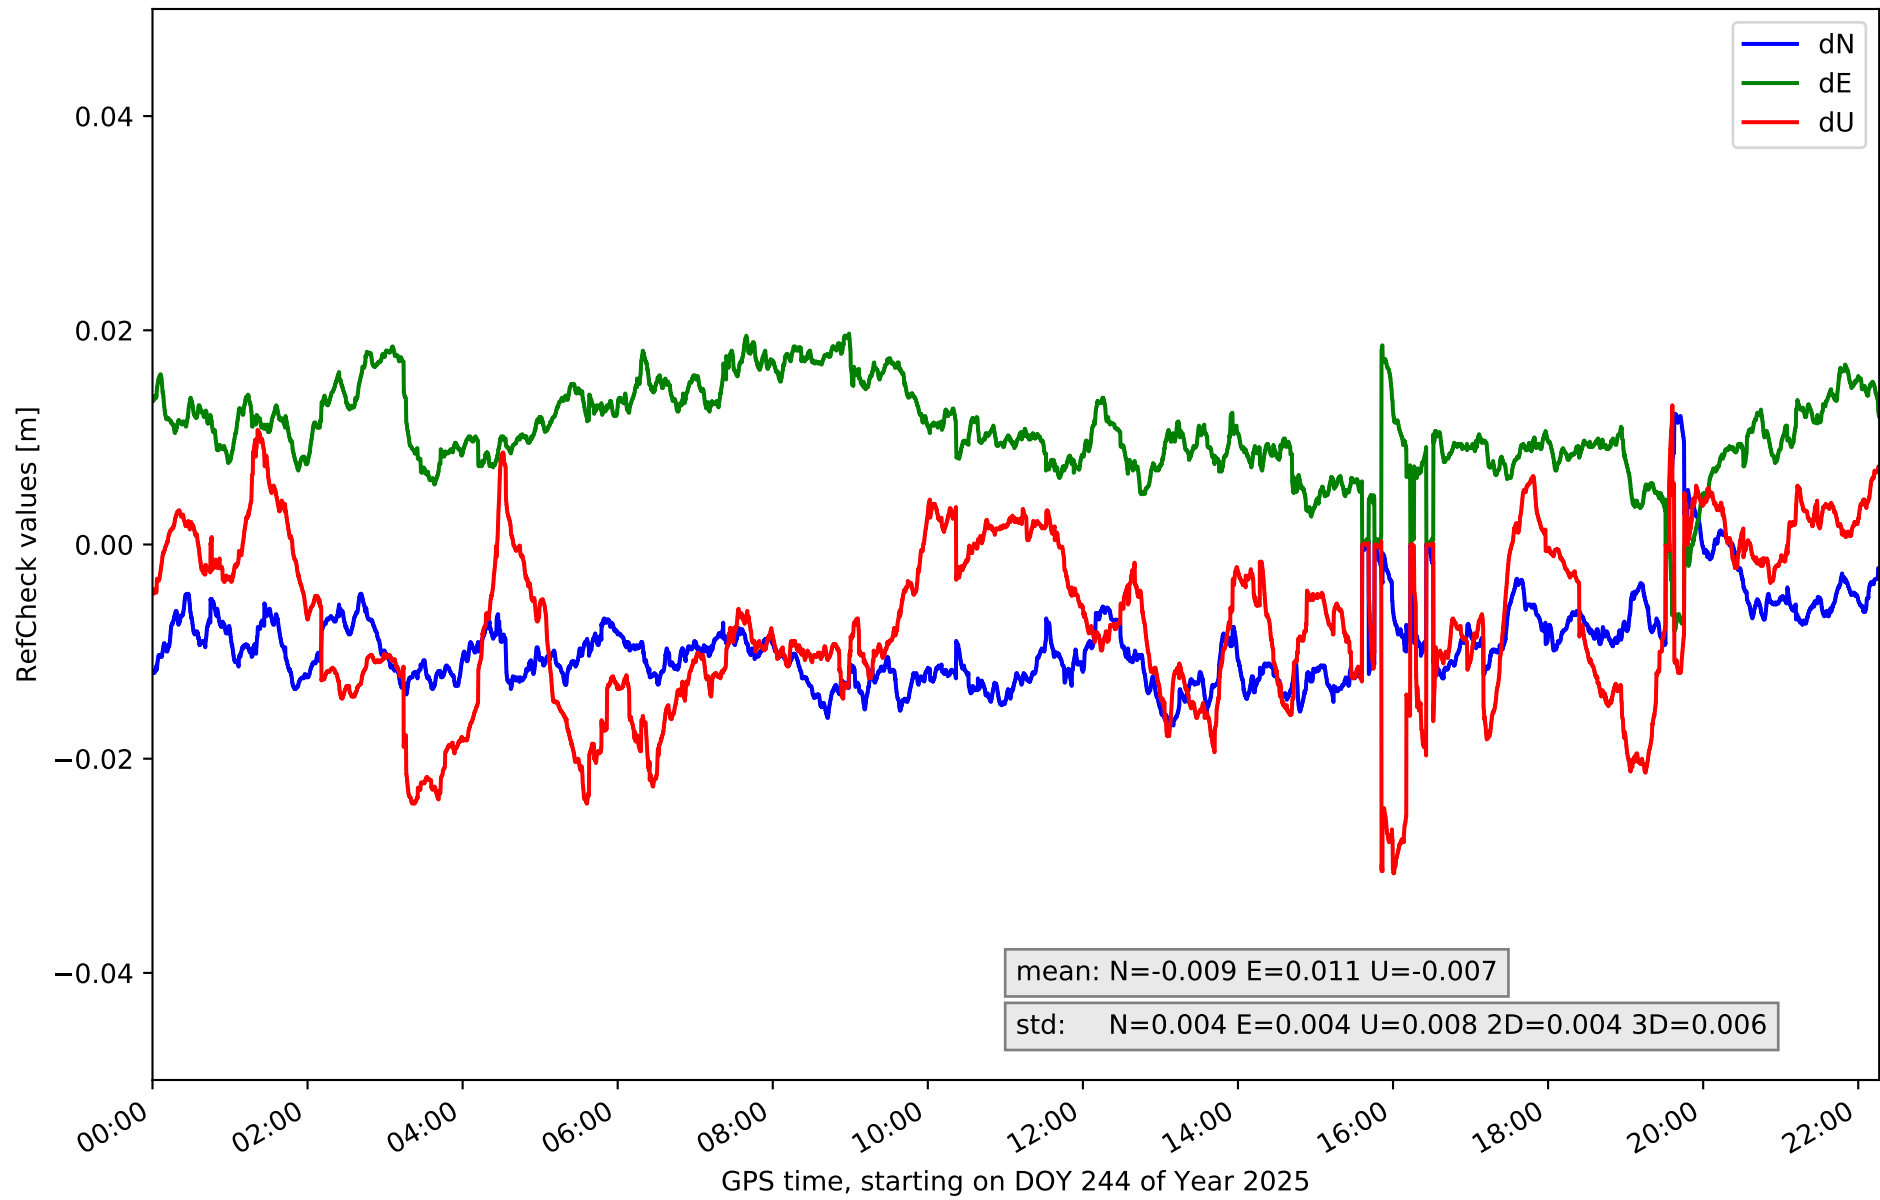


RefCheck for station LRES in network N32T

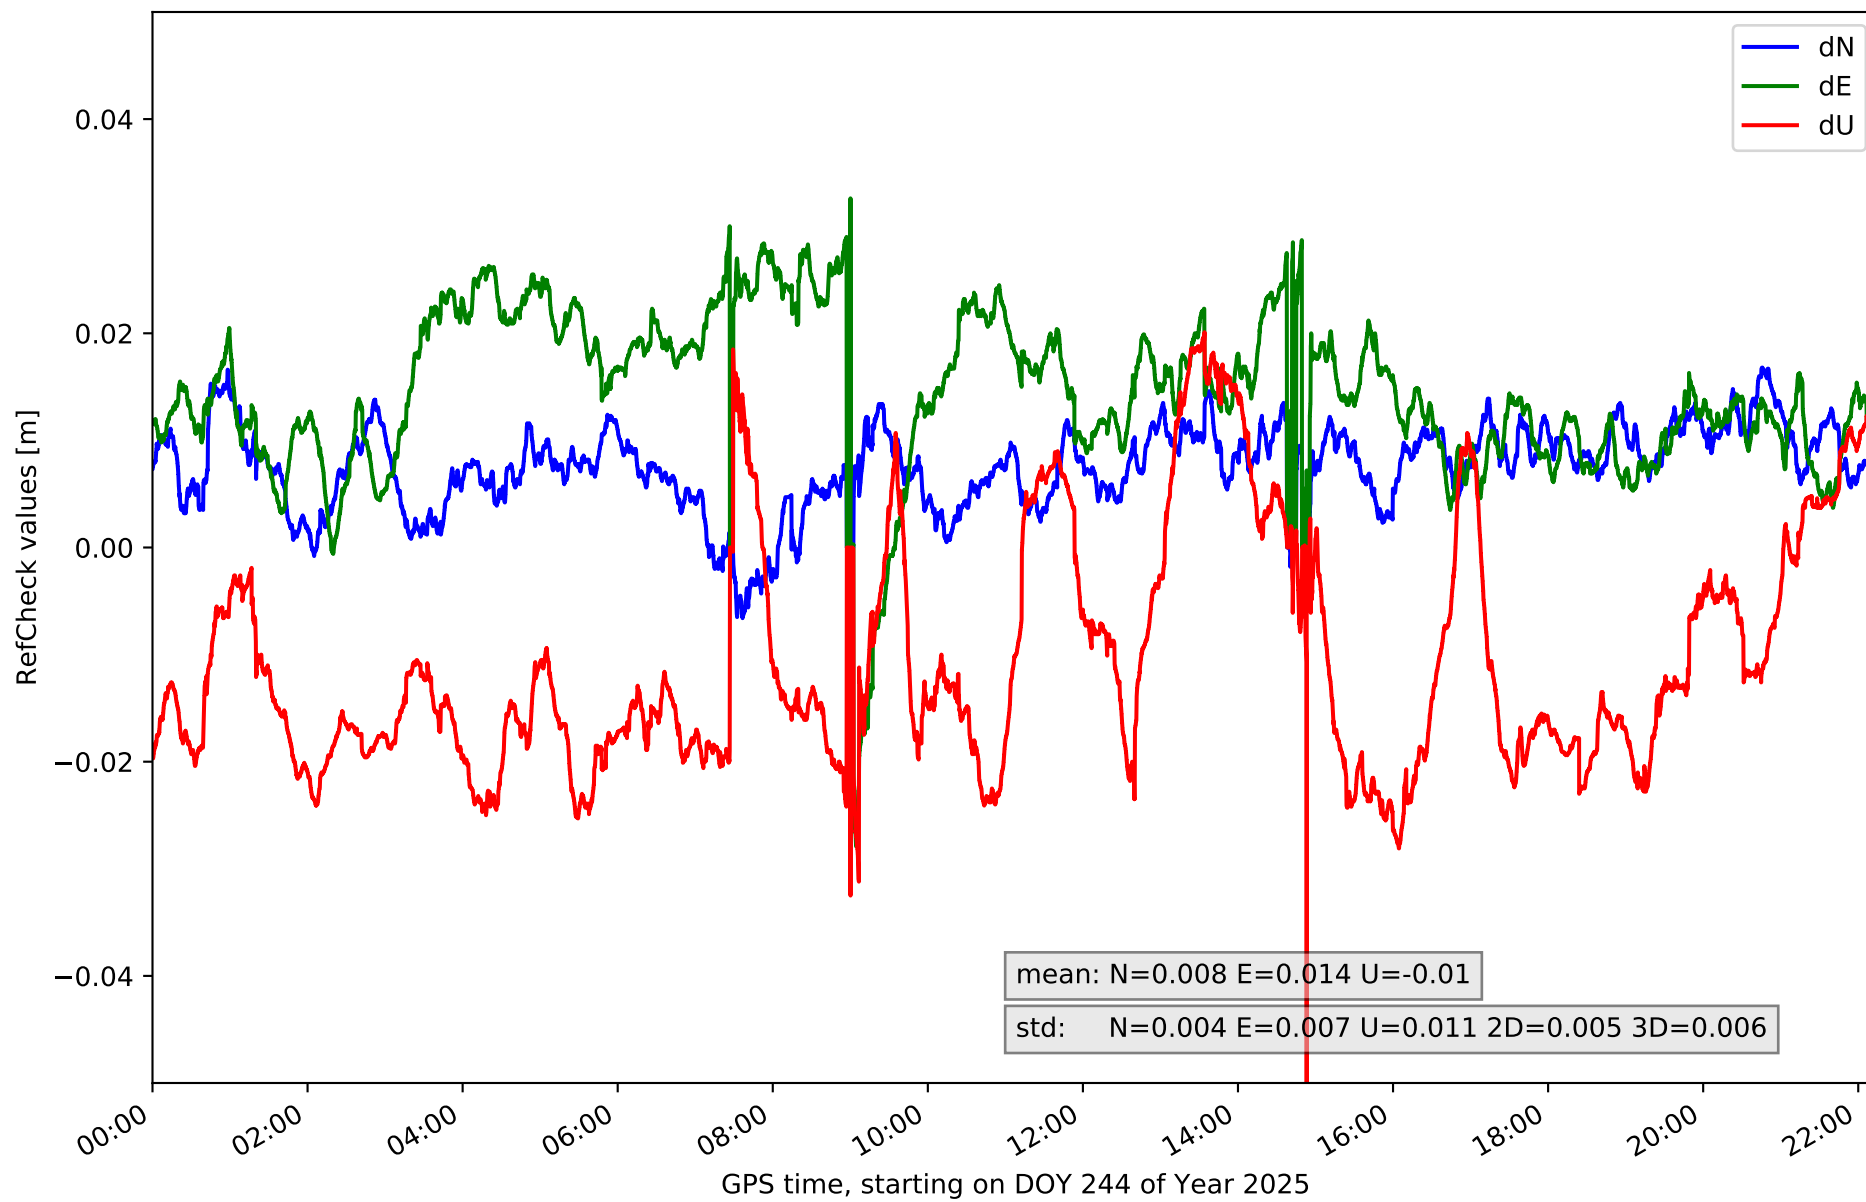


RefCheck for station TN01 in network N32T

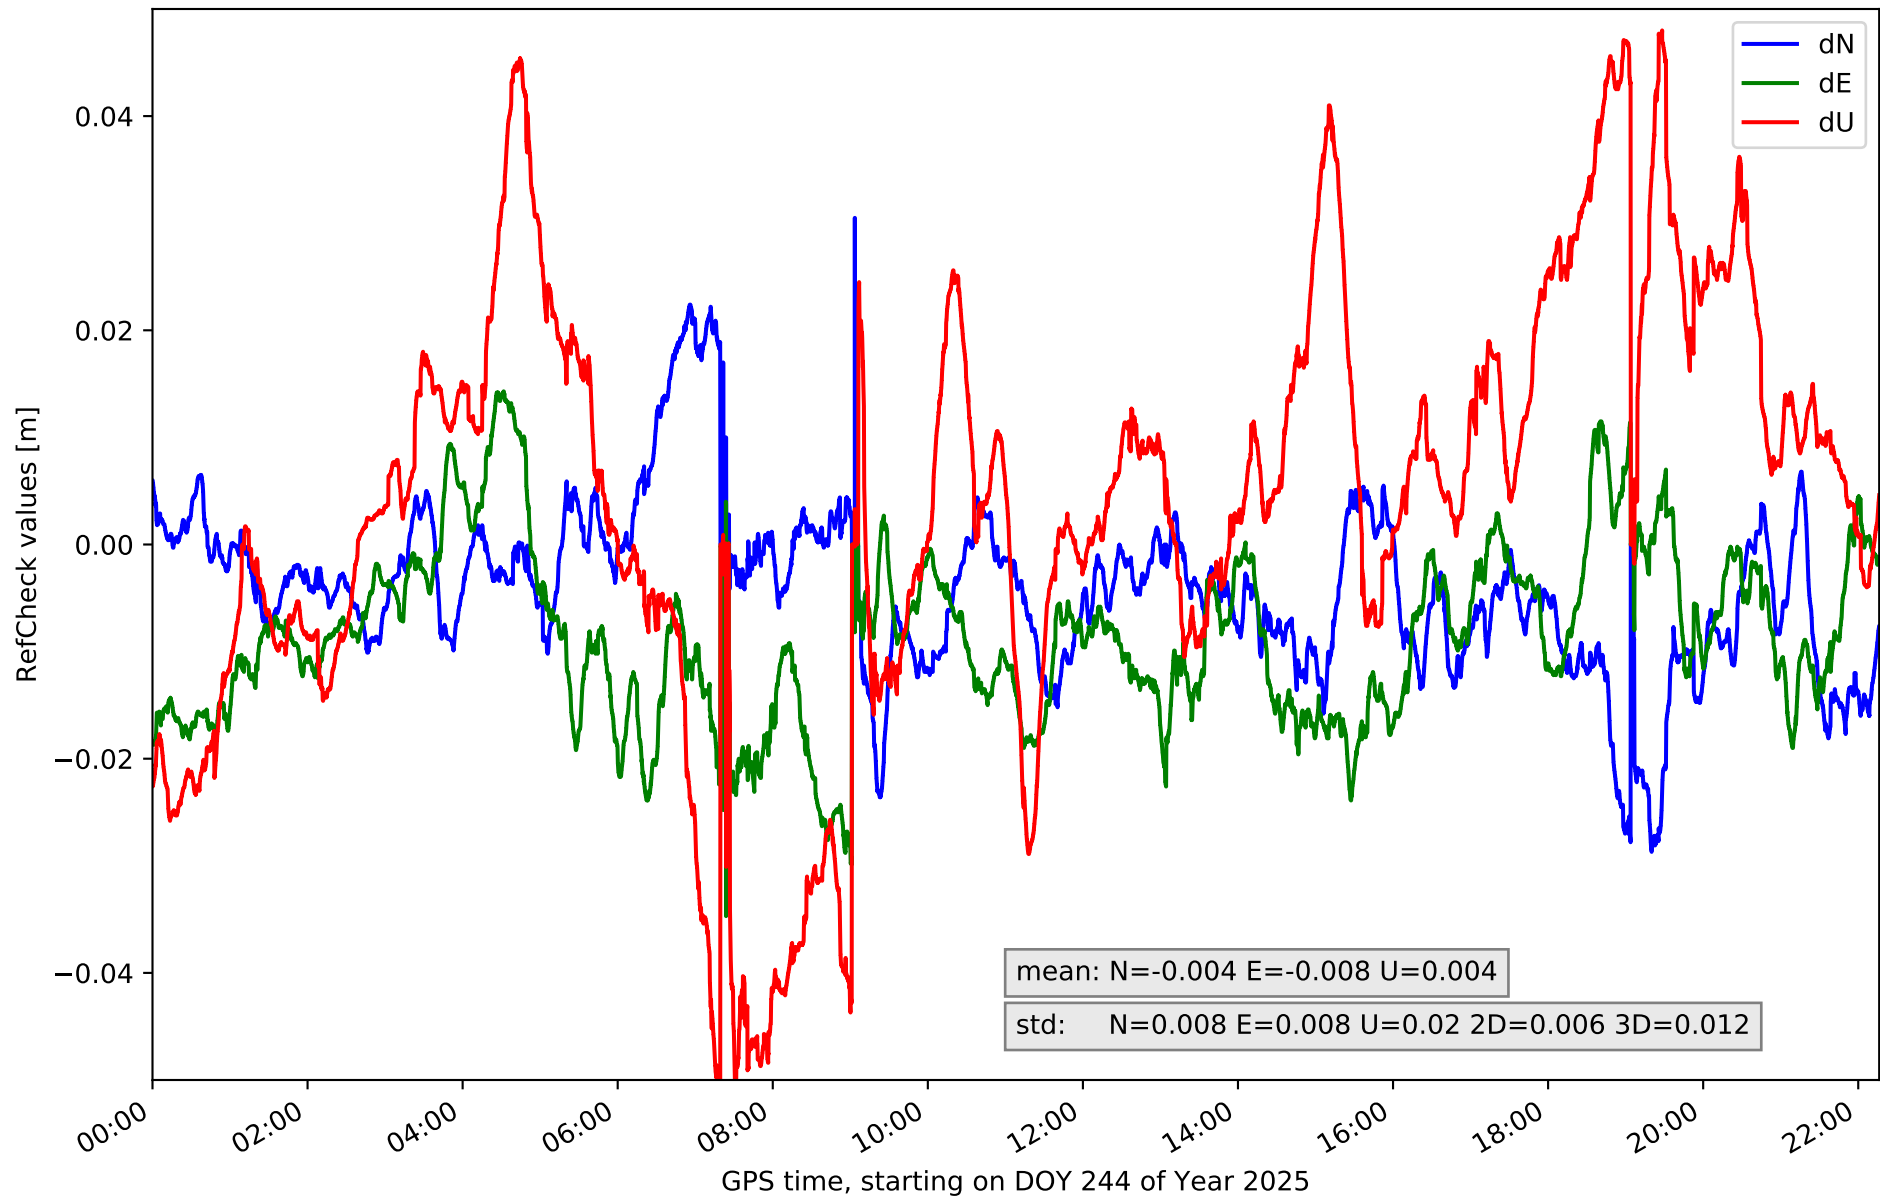


RefCheck for station TN02 in network N32T

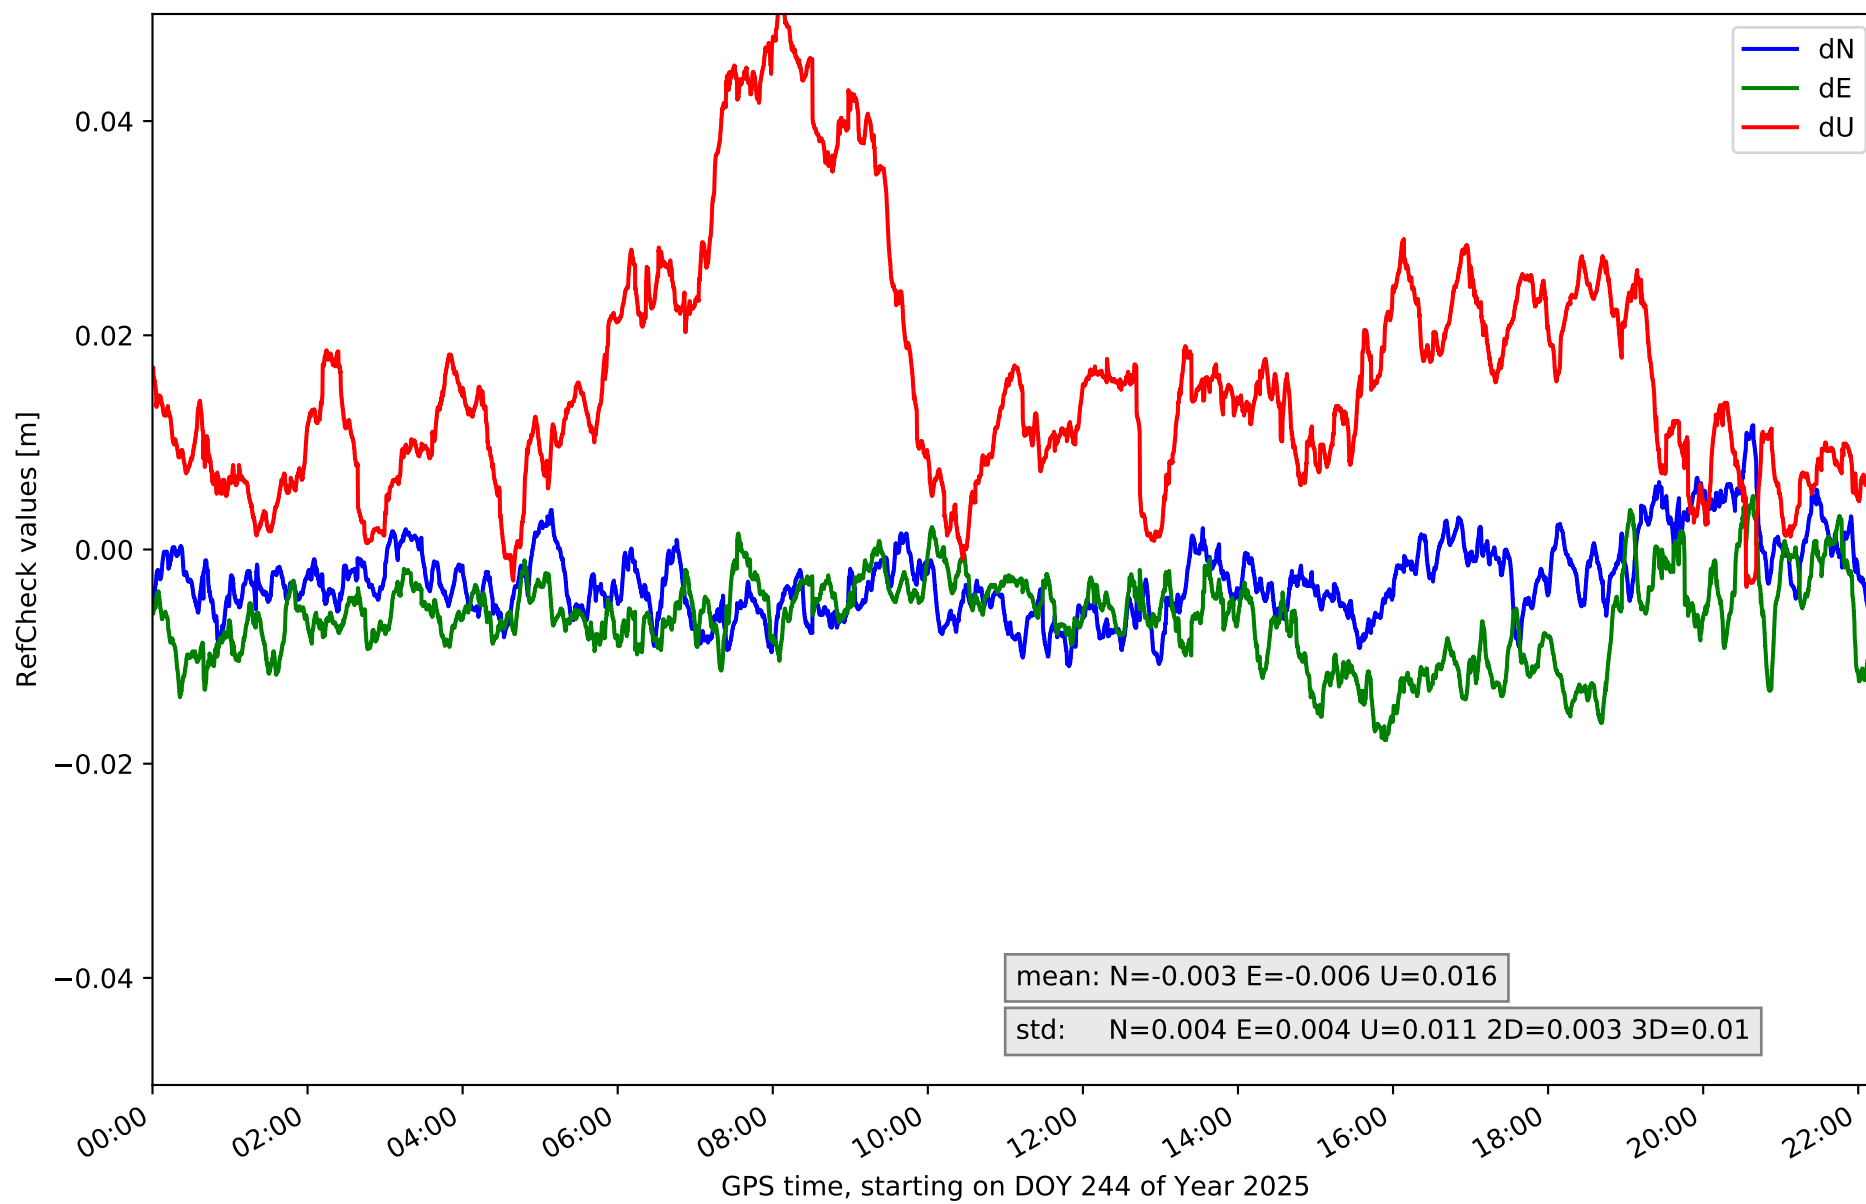


RefCheck for station TN03 in network N32T

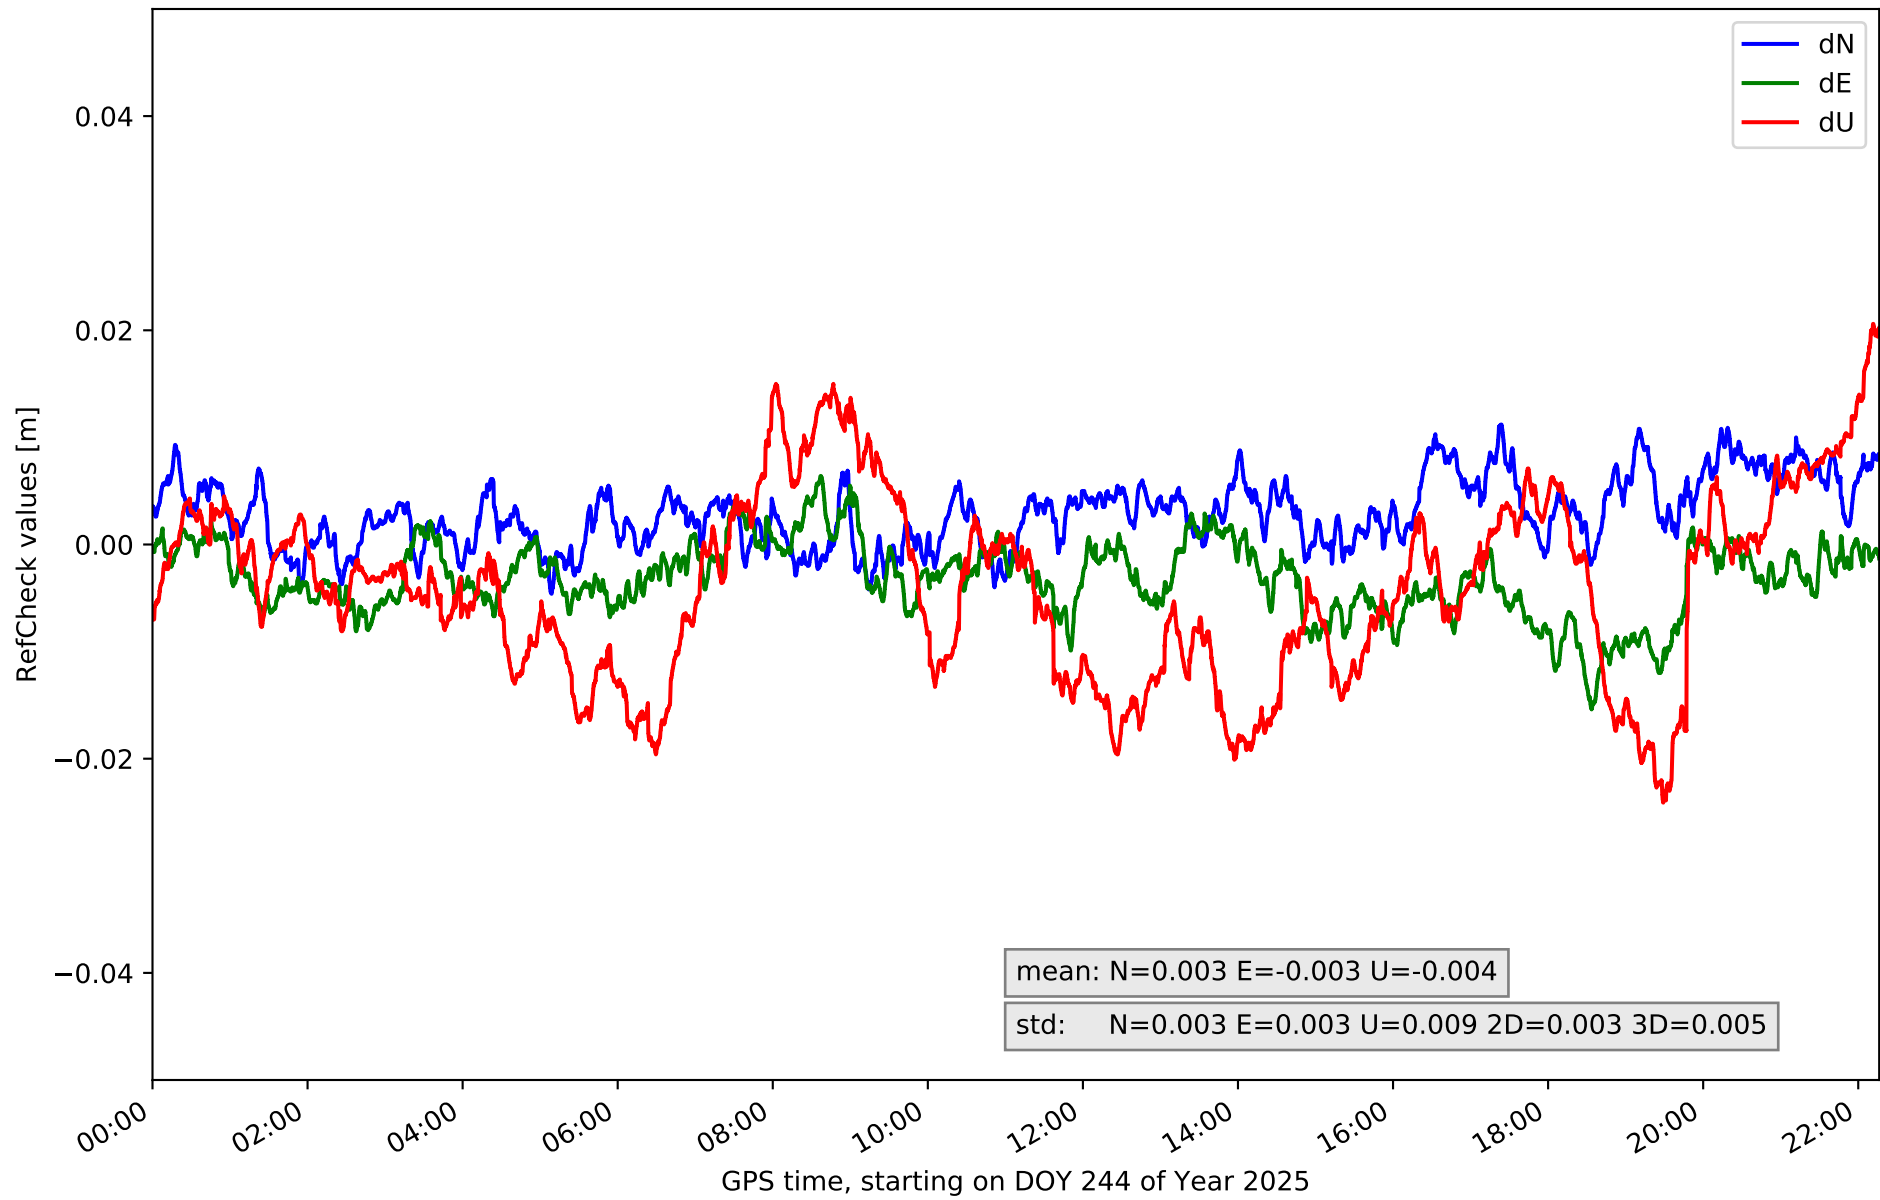


RefCheck for station TN04 in network N32T

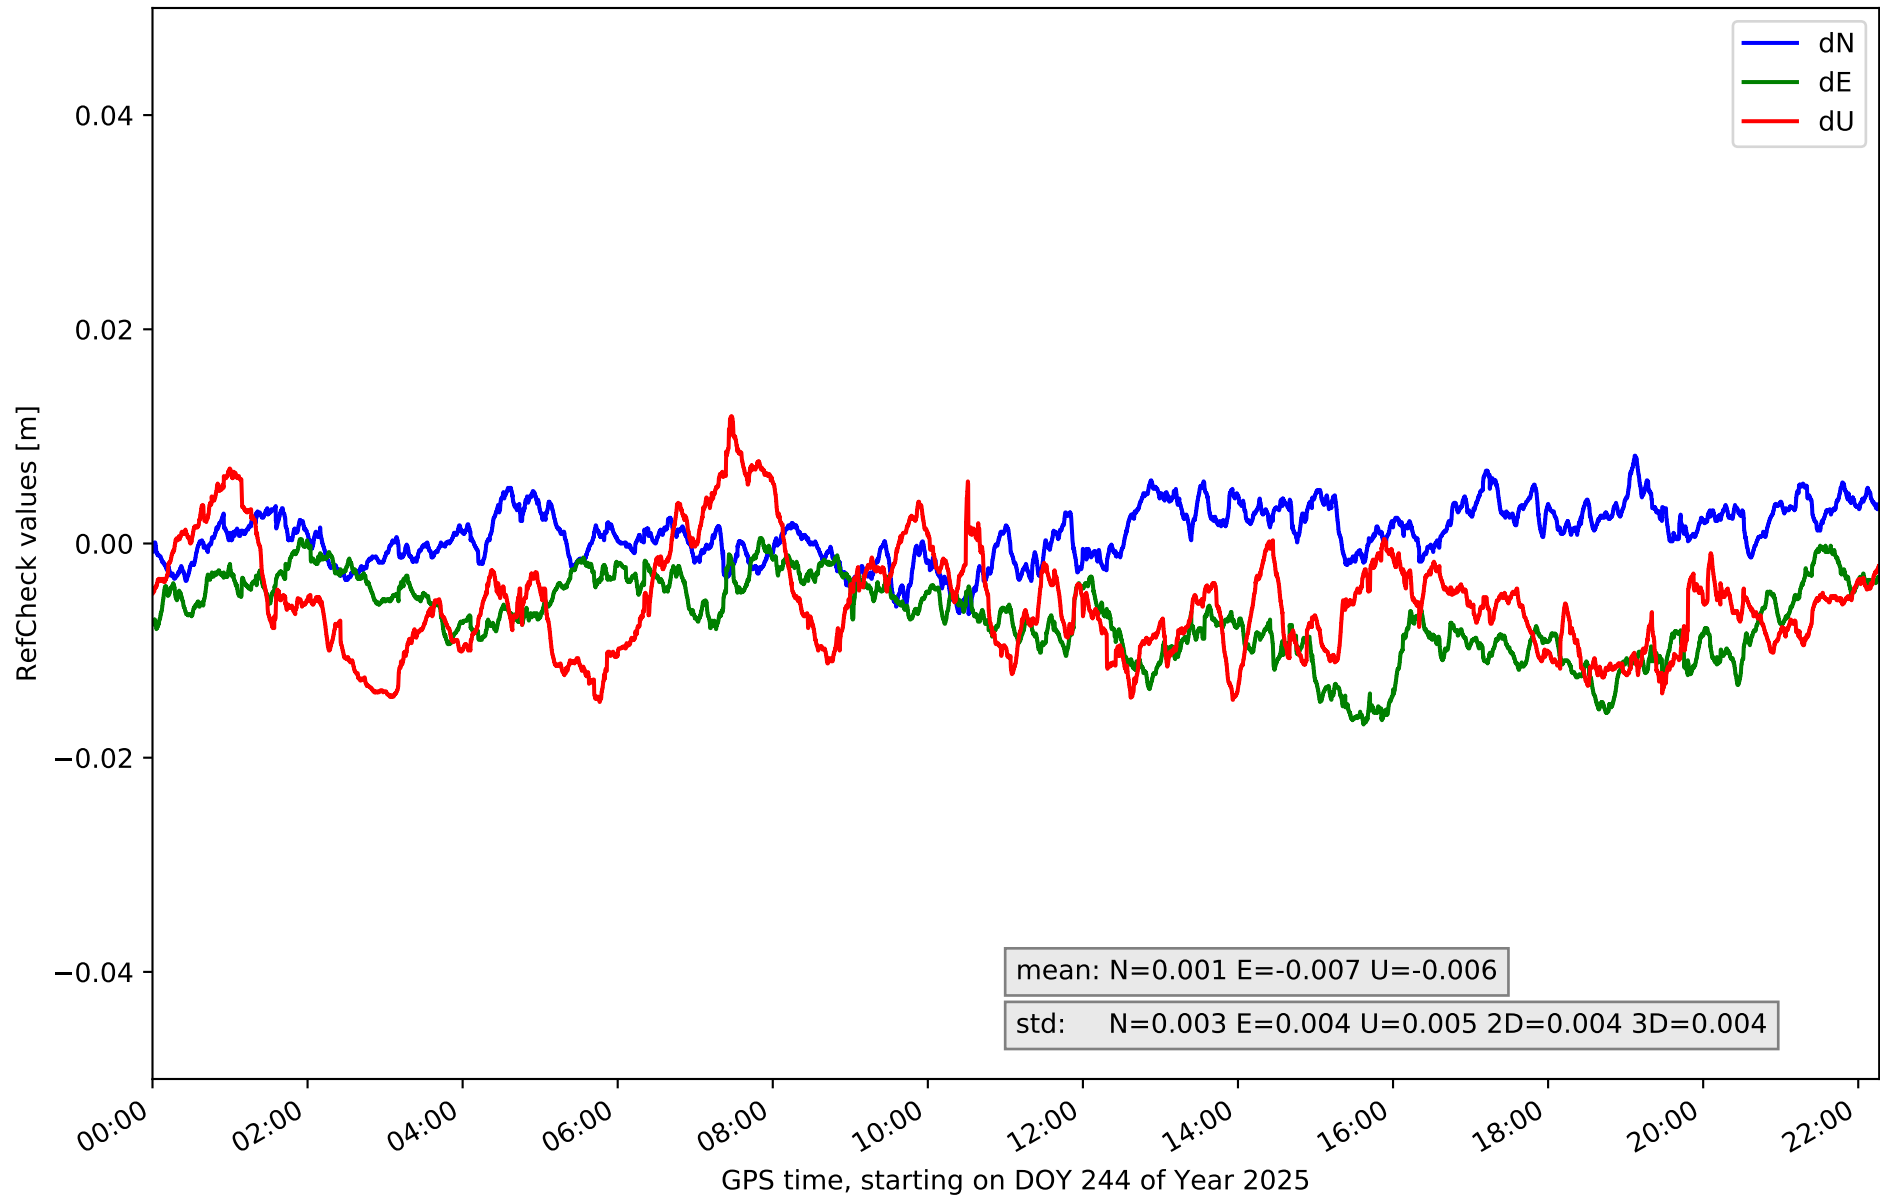


RefCheck for station TN06 in network N32T

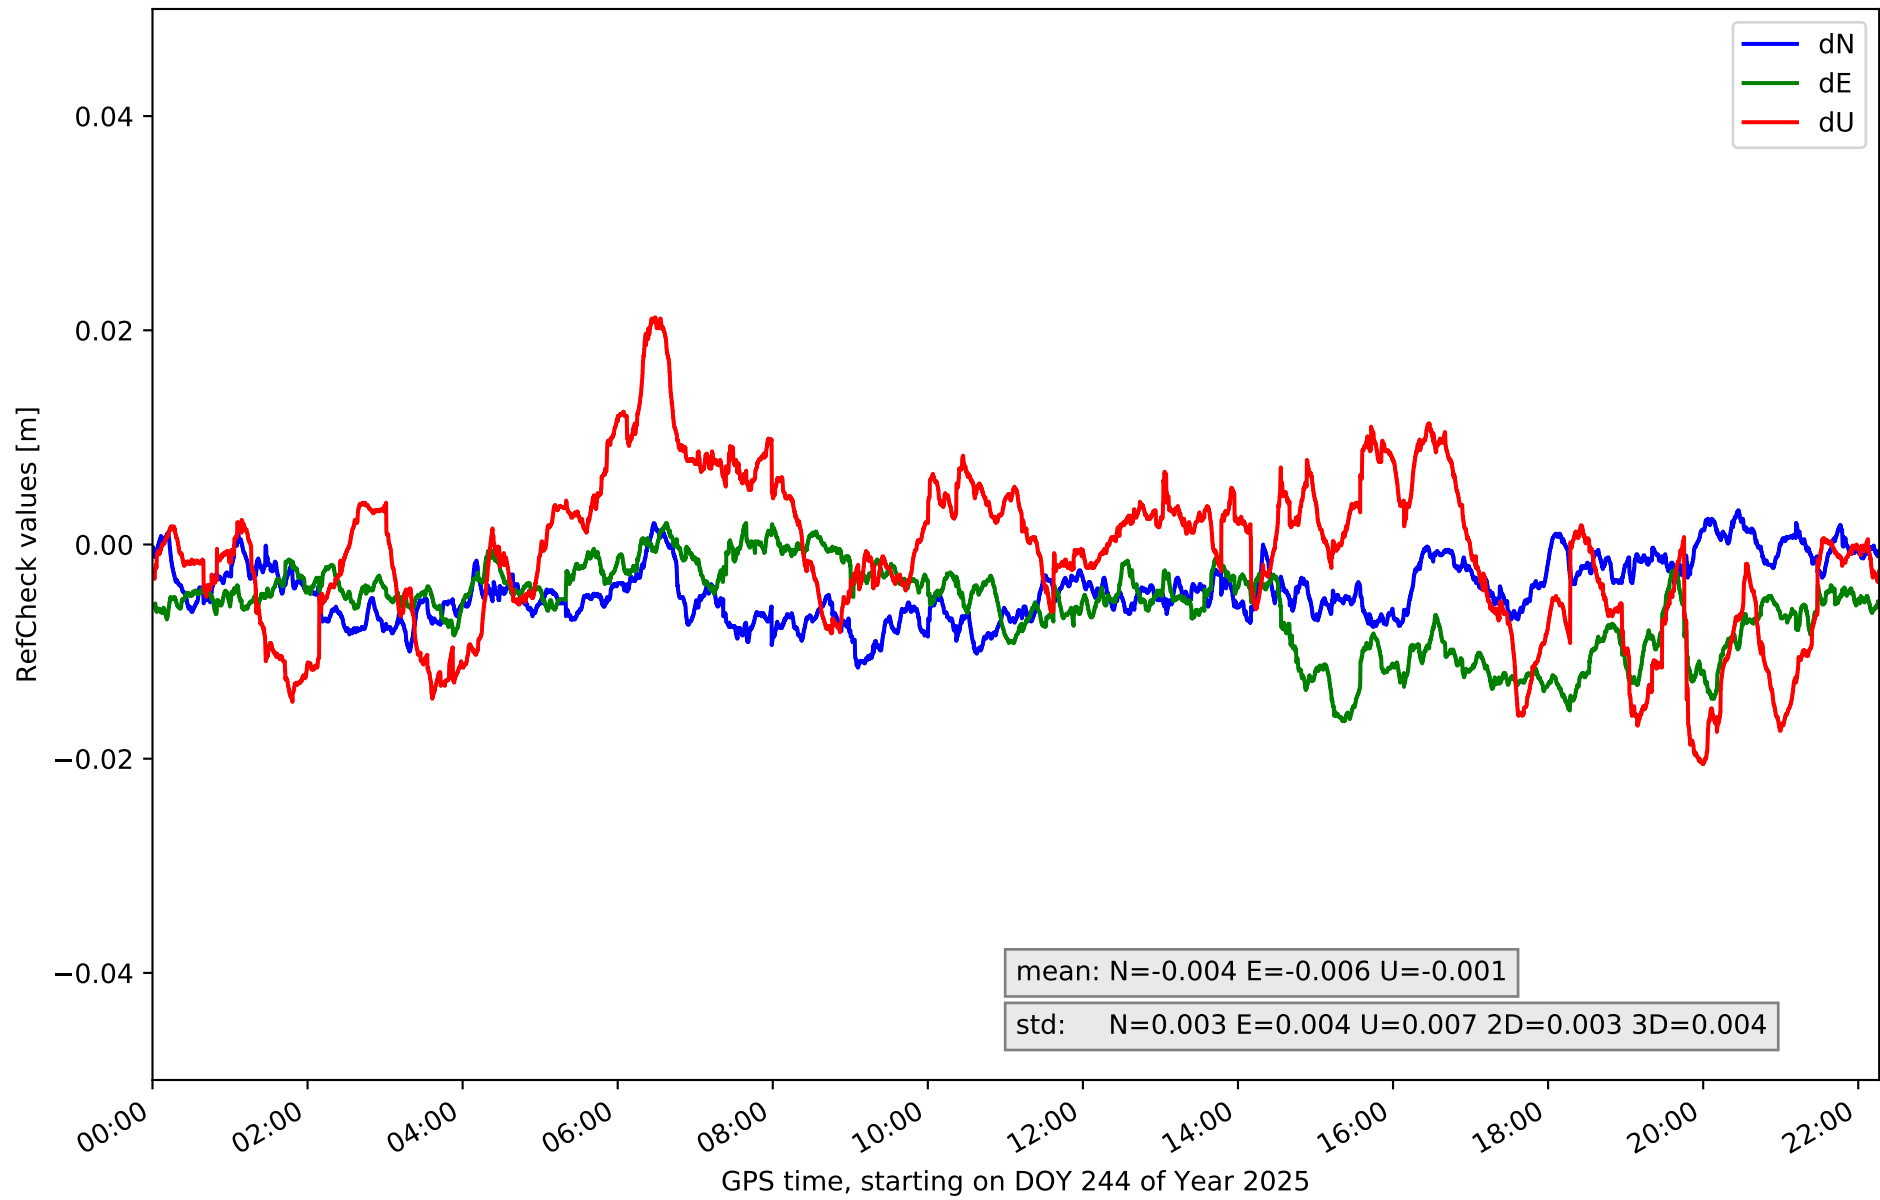

RefCheck for station TN09 in network N32T

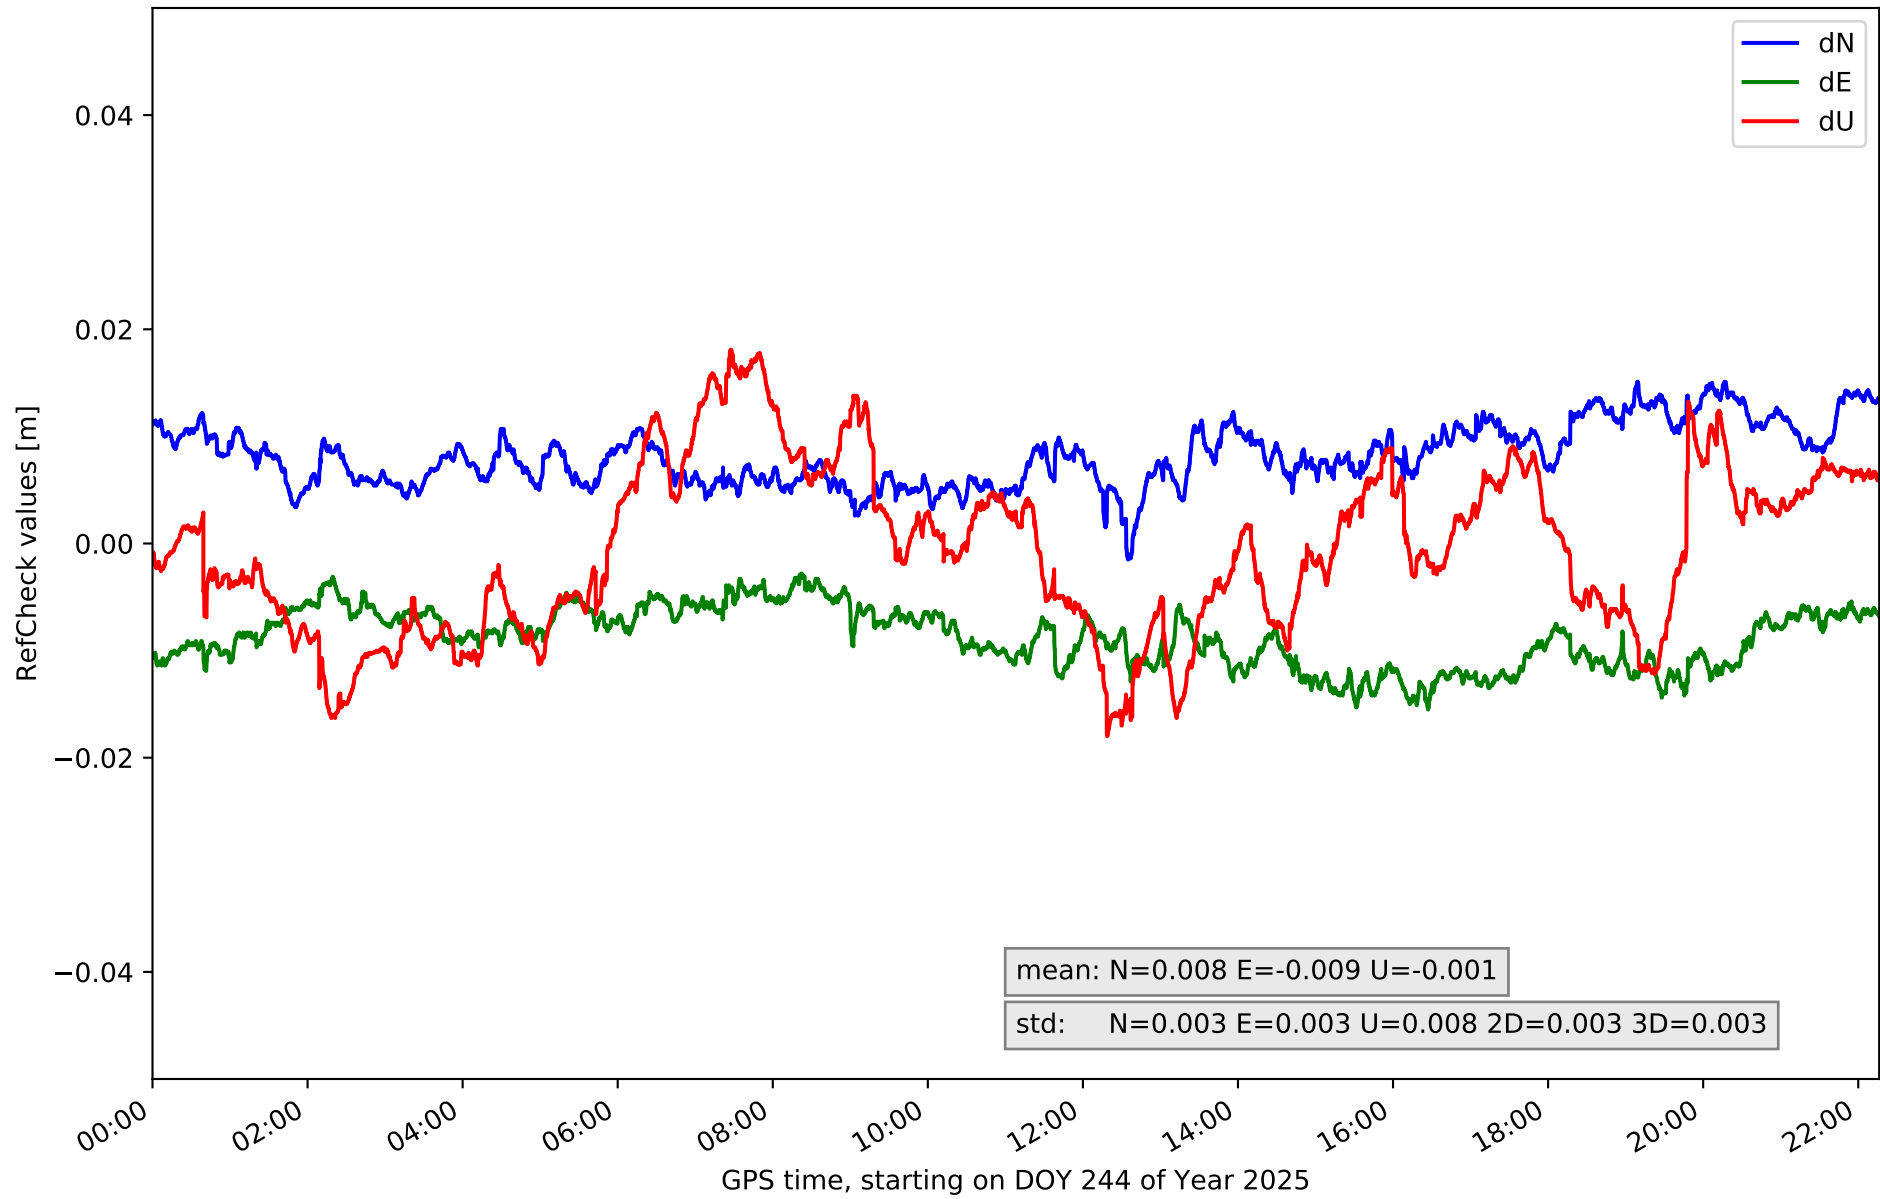

RefCheck for station TE11 in network N32T

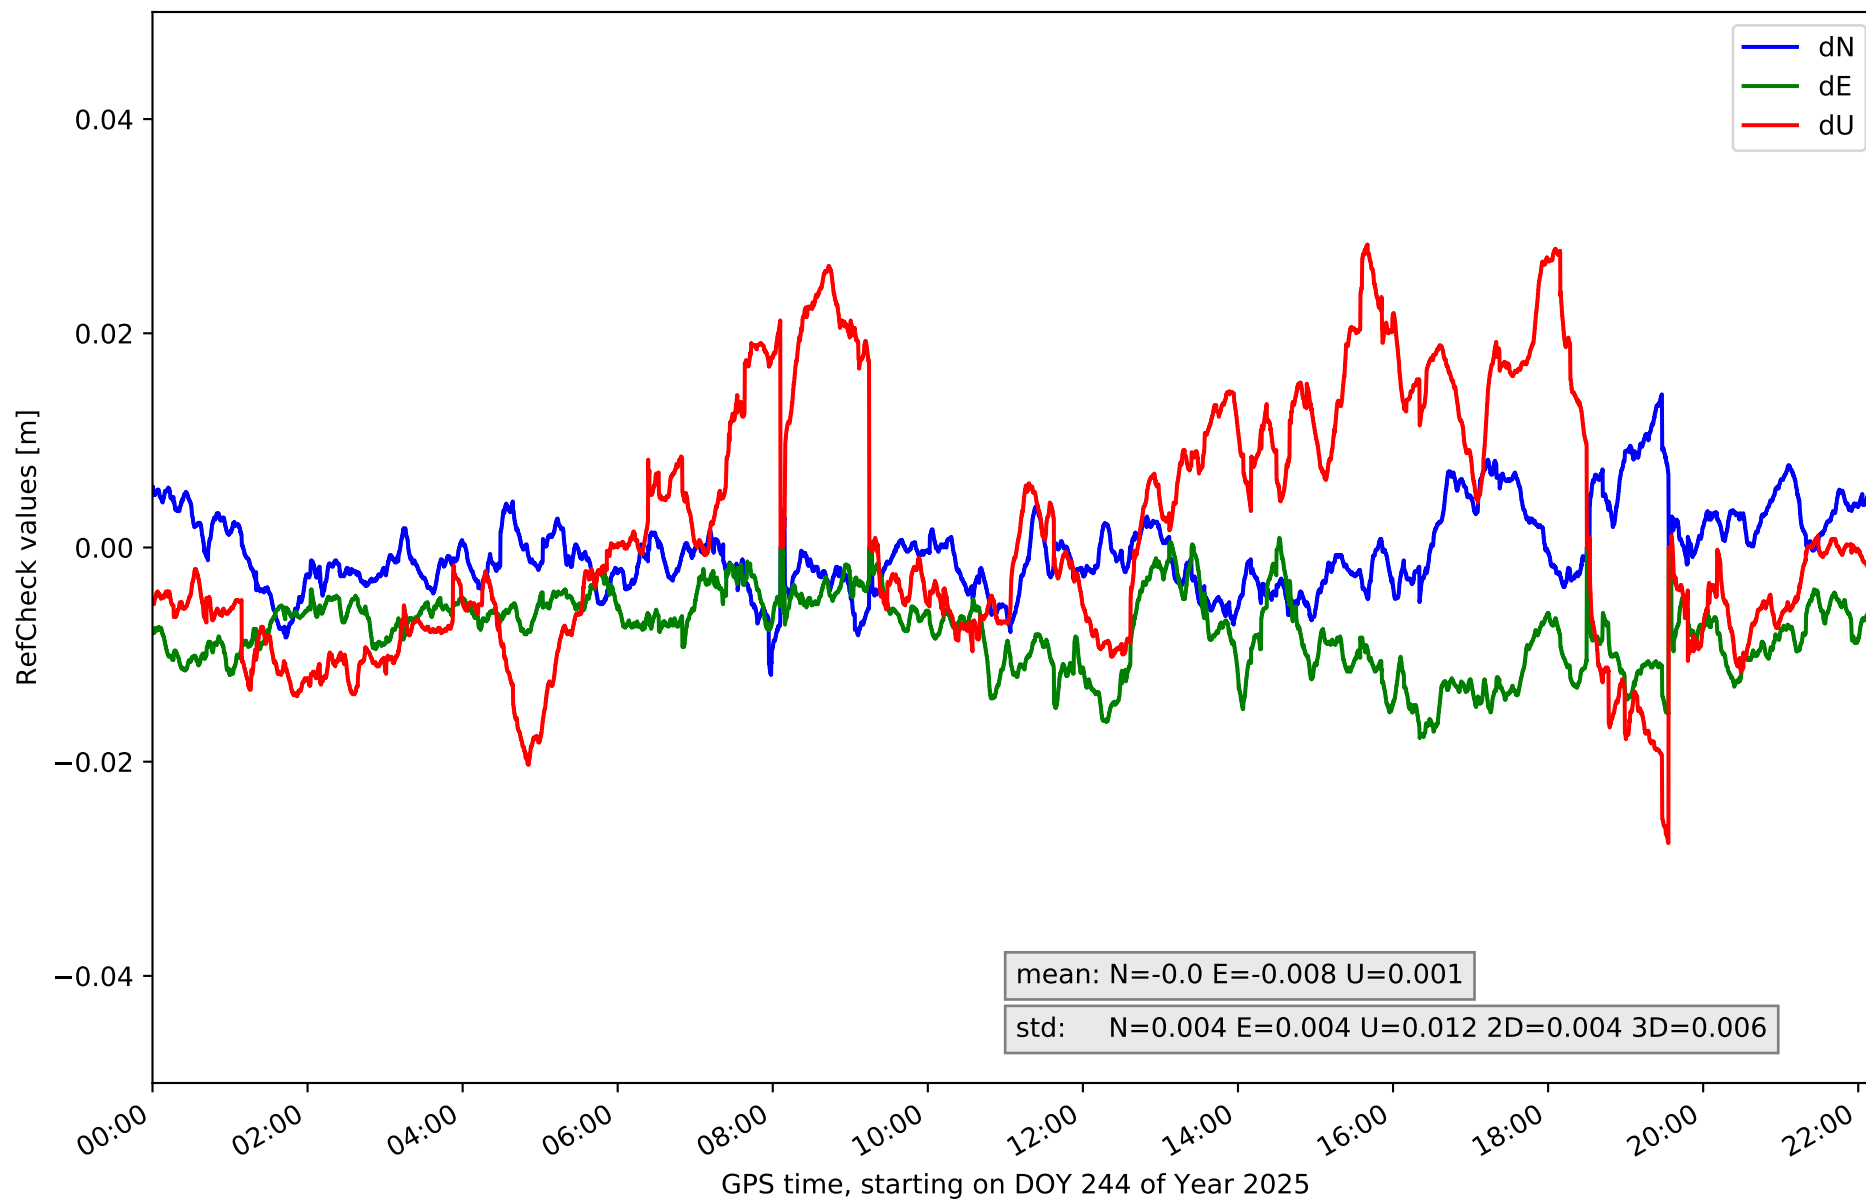

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.011	0.026	0.004	0.0	0.025	0.004	-0.026	0.033	0.014	0.004	0.005	67756	93.0	43733	60.0
EH02	-0.008	0.017	0.005	-0.001	0.025	0.004	-0.021	0.06	0.014	0.004	0.008	66903	91.8	50234	68.9
GOM1	-0.029	0.022	0.006	-0.025	0.01	0.006	-0.06	0.06	0.02	0.006	0.012	40498	55.6	24868	34.1
IZAN	-0.011	0.003	0.003	-0.015	0.011	0.004	-0.06	0.015	0.007	0.003	0.005	11051	15.2	199	0.3
LP01	-0.025	-0.0	0.004	-0.004	0.022	0.005	-0.02	0.037	0.013	0.004	0.007	62223	85.4	33658	46.2
LP03	-0.017	0.024	0.004	-0.025	0.022	0.006	-0.044	0.023	0.013	0.005	0.009	20287	27.8	20478	28.1
LPAL	-0.017	0.012	0.004	-0.008	0.02	0.004	-0.031	0.013	0.008	0.004	0.006	66068	90.6	26189	35.9
LRES	-0.007	0.017	0.004	-0.028	0.033	0.007	-0.067	0.02	0.011	0.005	0.006	68119	93.4	49835	68.4
TN01	-0.029	0.03	0.008	-0.035	0.014	0.008	-0.06	0.048	0.02	0.006	0.012	52314	71.8	32700	44.9
TN02	-0.011	0.012	0.004	-0.018	0.005	0.004	-0.004	0.054	0.011	0.003	0.01	21108	29.0	25880	35.5
TN03	-0.005	0.011	0.003	-0.015	0.006	0.003	-0.024	0.021	0.009	0.003	0.005	6127	8.4	2739	3.8
TN04	-0.007	0.008	0.003	-0.017	0.001	0.004	-0.015	0.012	0.005	0.004	0.004	17123	23.5	0	0.0
TN06	-0.011	0.003	0.003	-0.017	0.002	0.004	-0.021	0.021	0.007	0.003	0.004	17233	23.6	2873	3.9
TN09	-0.002	0.015	0.003	-0.015	-0.003	0.003	-0.018	0.018	0.008	0.003	0.003	51354	70.4	2670	3.7
TE11	-0.012	0.014	0.004	-0.018	0.001	0.004	-0.028	0.028	0.012	0.004	0.006	24402	33.5	13941	19.1
Mean	-0.013	0.014	0.004	-0.016	0.013	0.005	-0.033	0.031	0.011	0.004	0.007	39504.4	54.2	21999.8	30.2
Min/Max	-0.029	0.03	0.008	-0.035	0.033	0.008	-0.067	0.06	0.02	0.006	0.012	68119	93.4	50234	68.9

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	91.2	92.5	91.2	93.1	89.0
considering satellites with dual-frequency fixed	89.2	89.4	86.9	91.8	87.1
considering all signals separately	89.2	89.5	86.9	92.1	85.3