

summary for network NT32

timeperiod chosen: from 2025-09-01-00:00:00 until 2025-09-01-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.3 seconds


average fixing percentage with threshold set to 0.3: 90.6 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

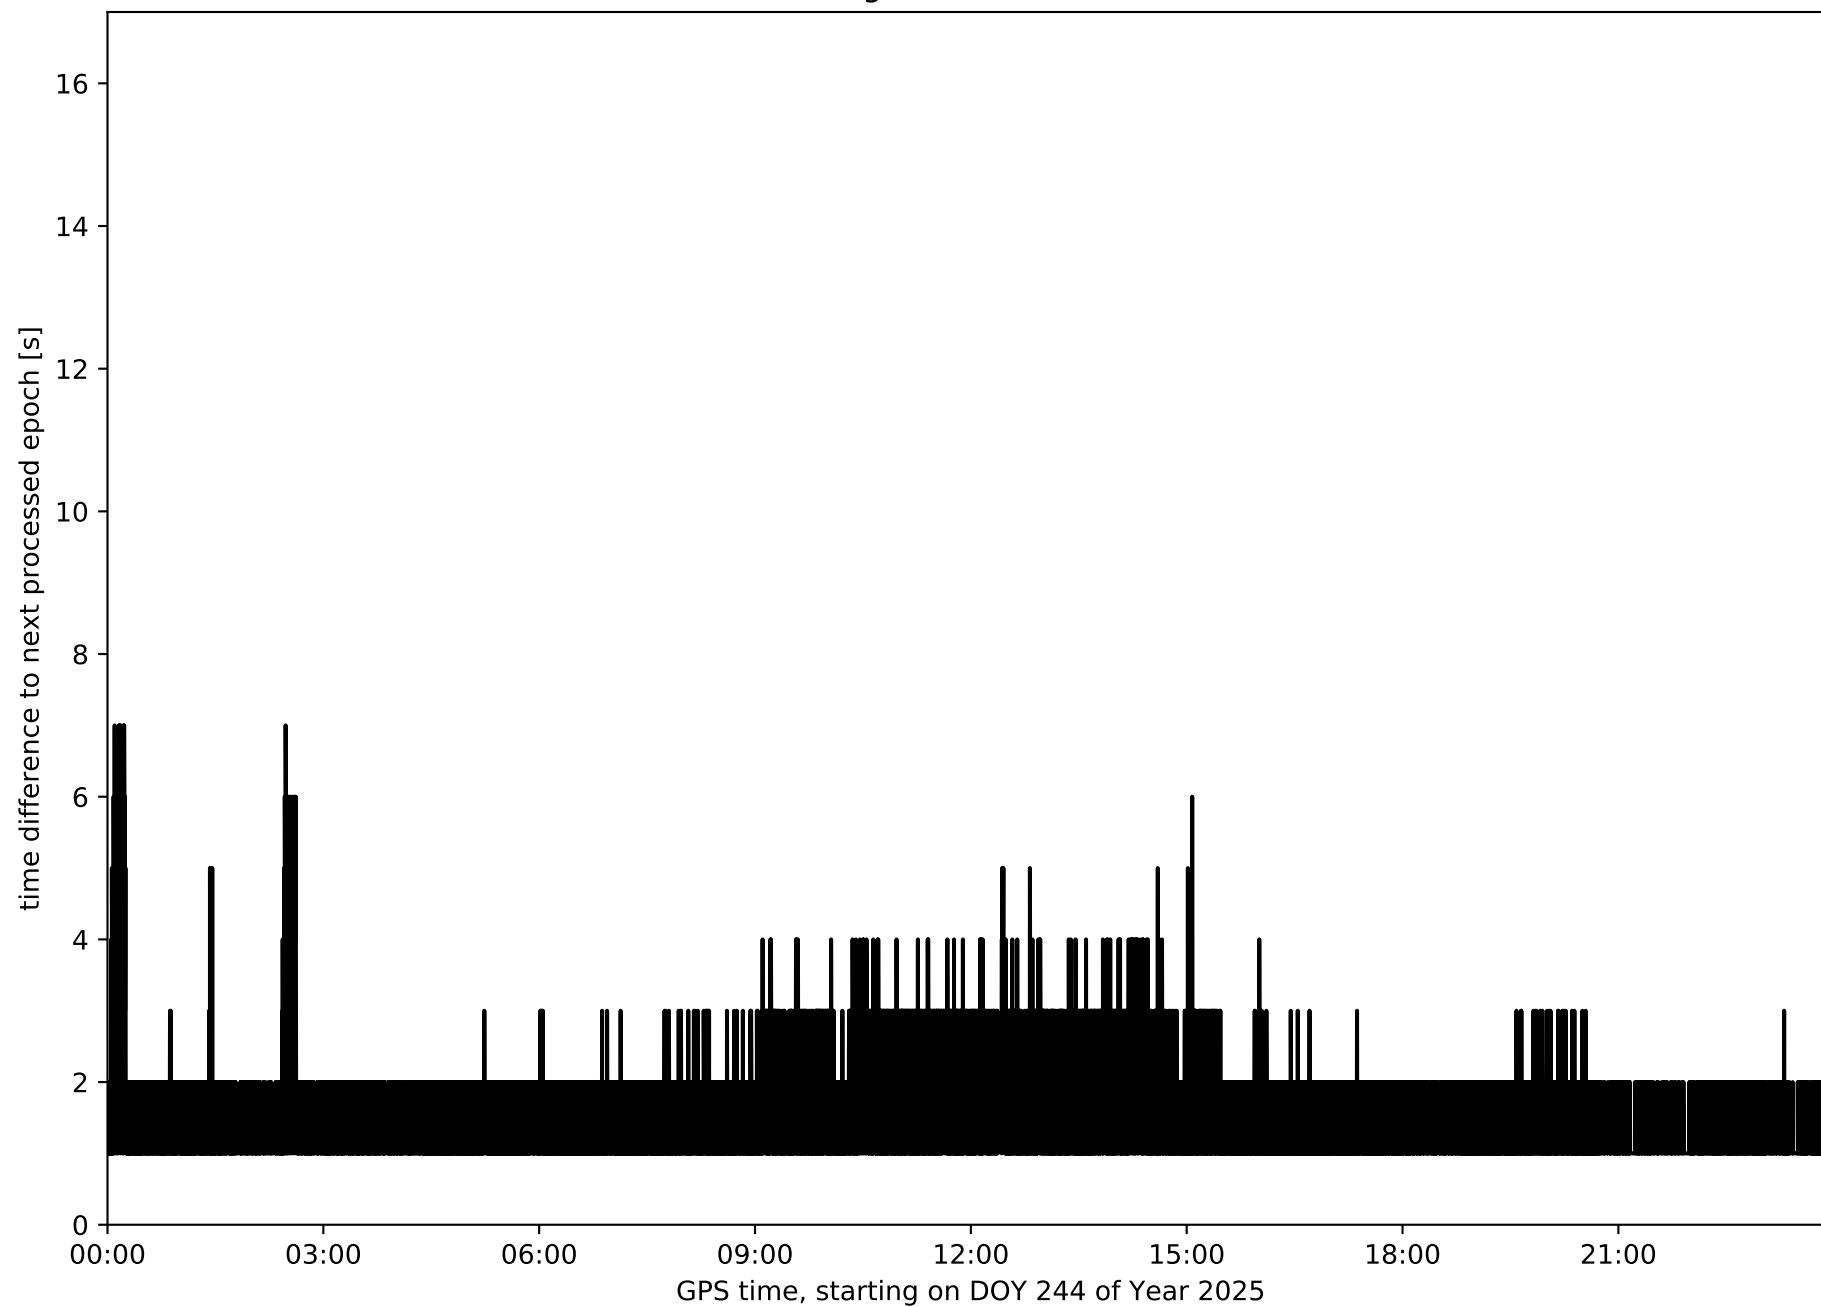


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

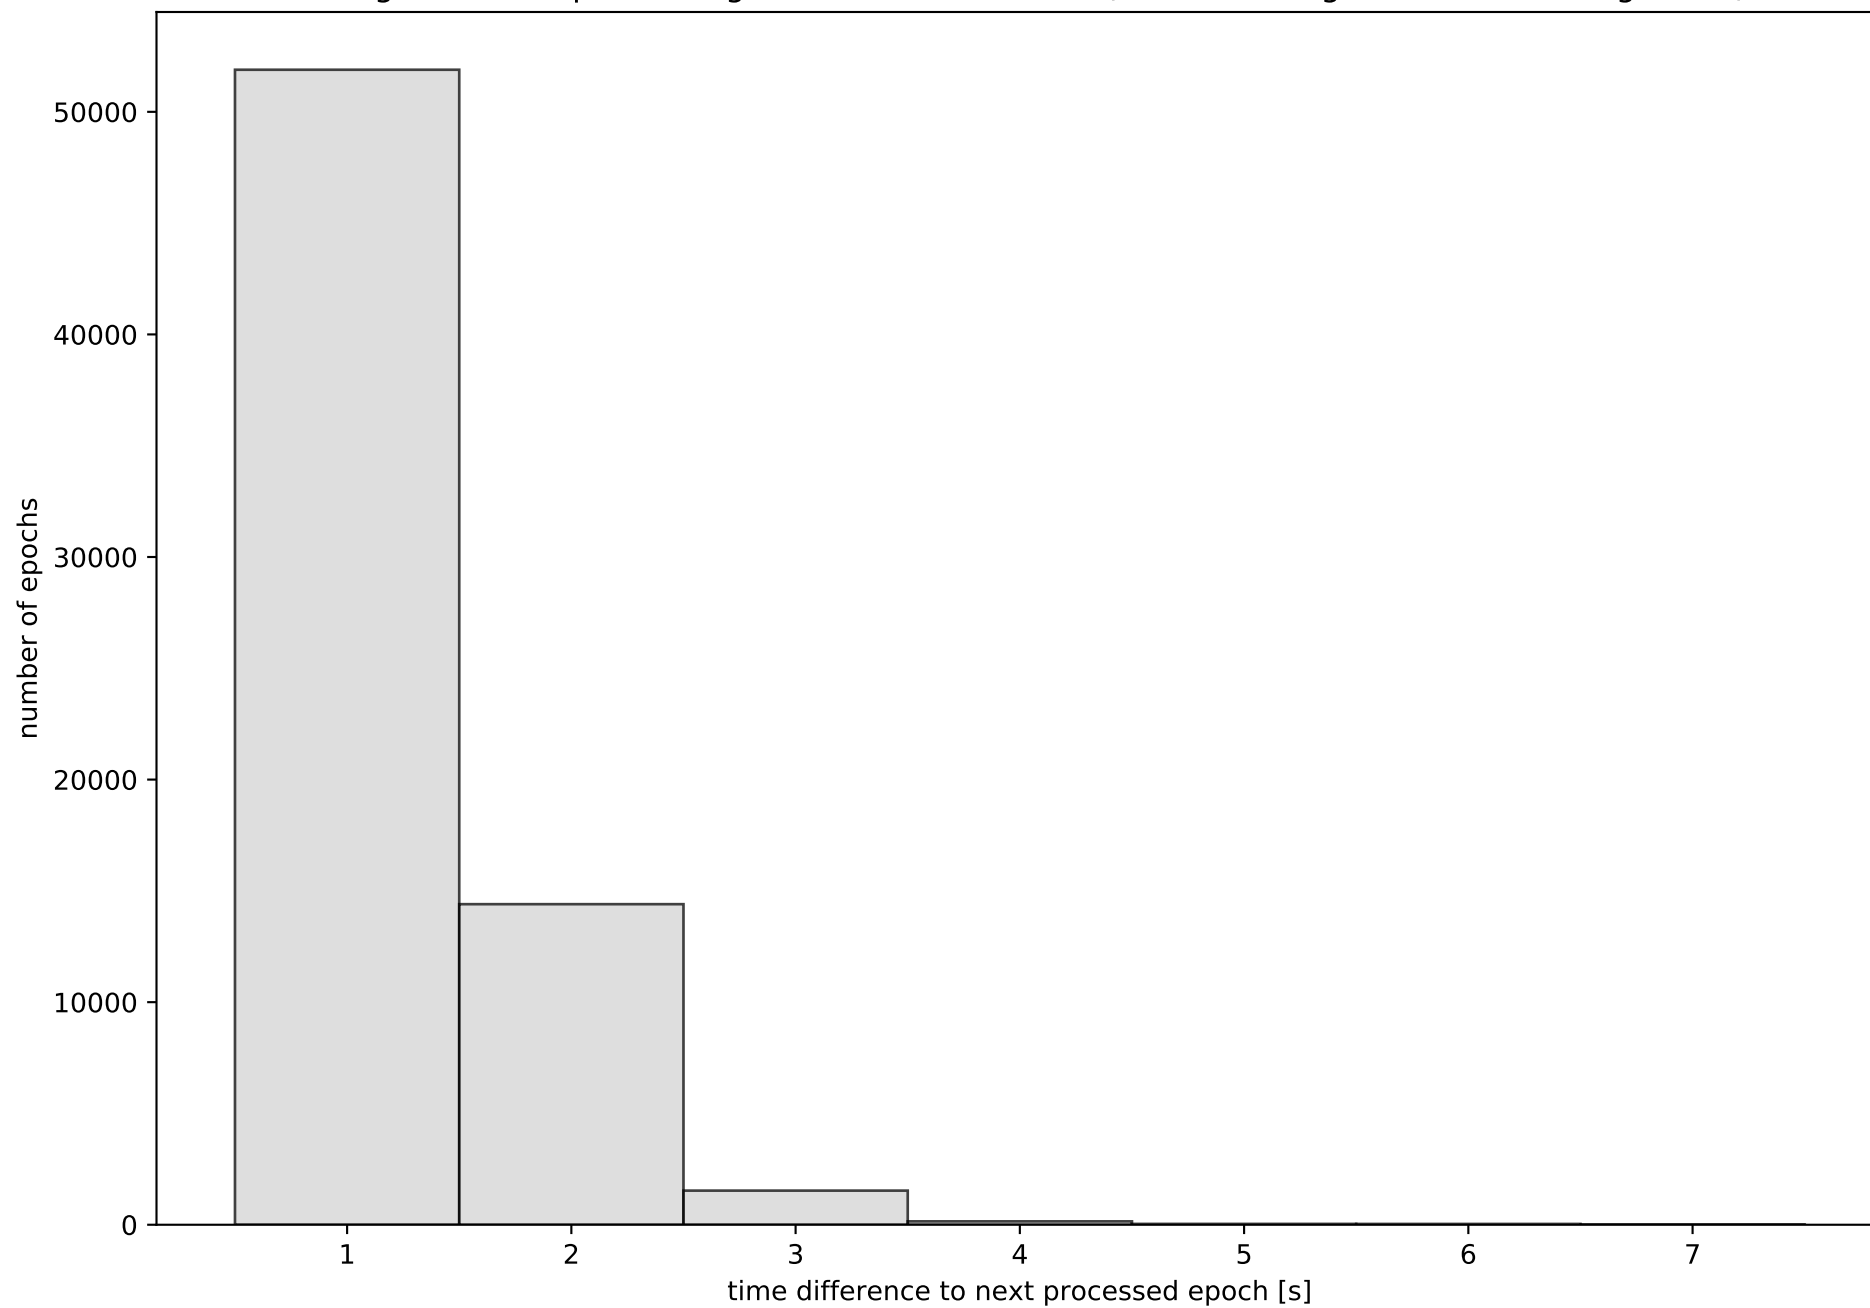


Network NT32 with threshold set to 0.3

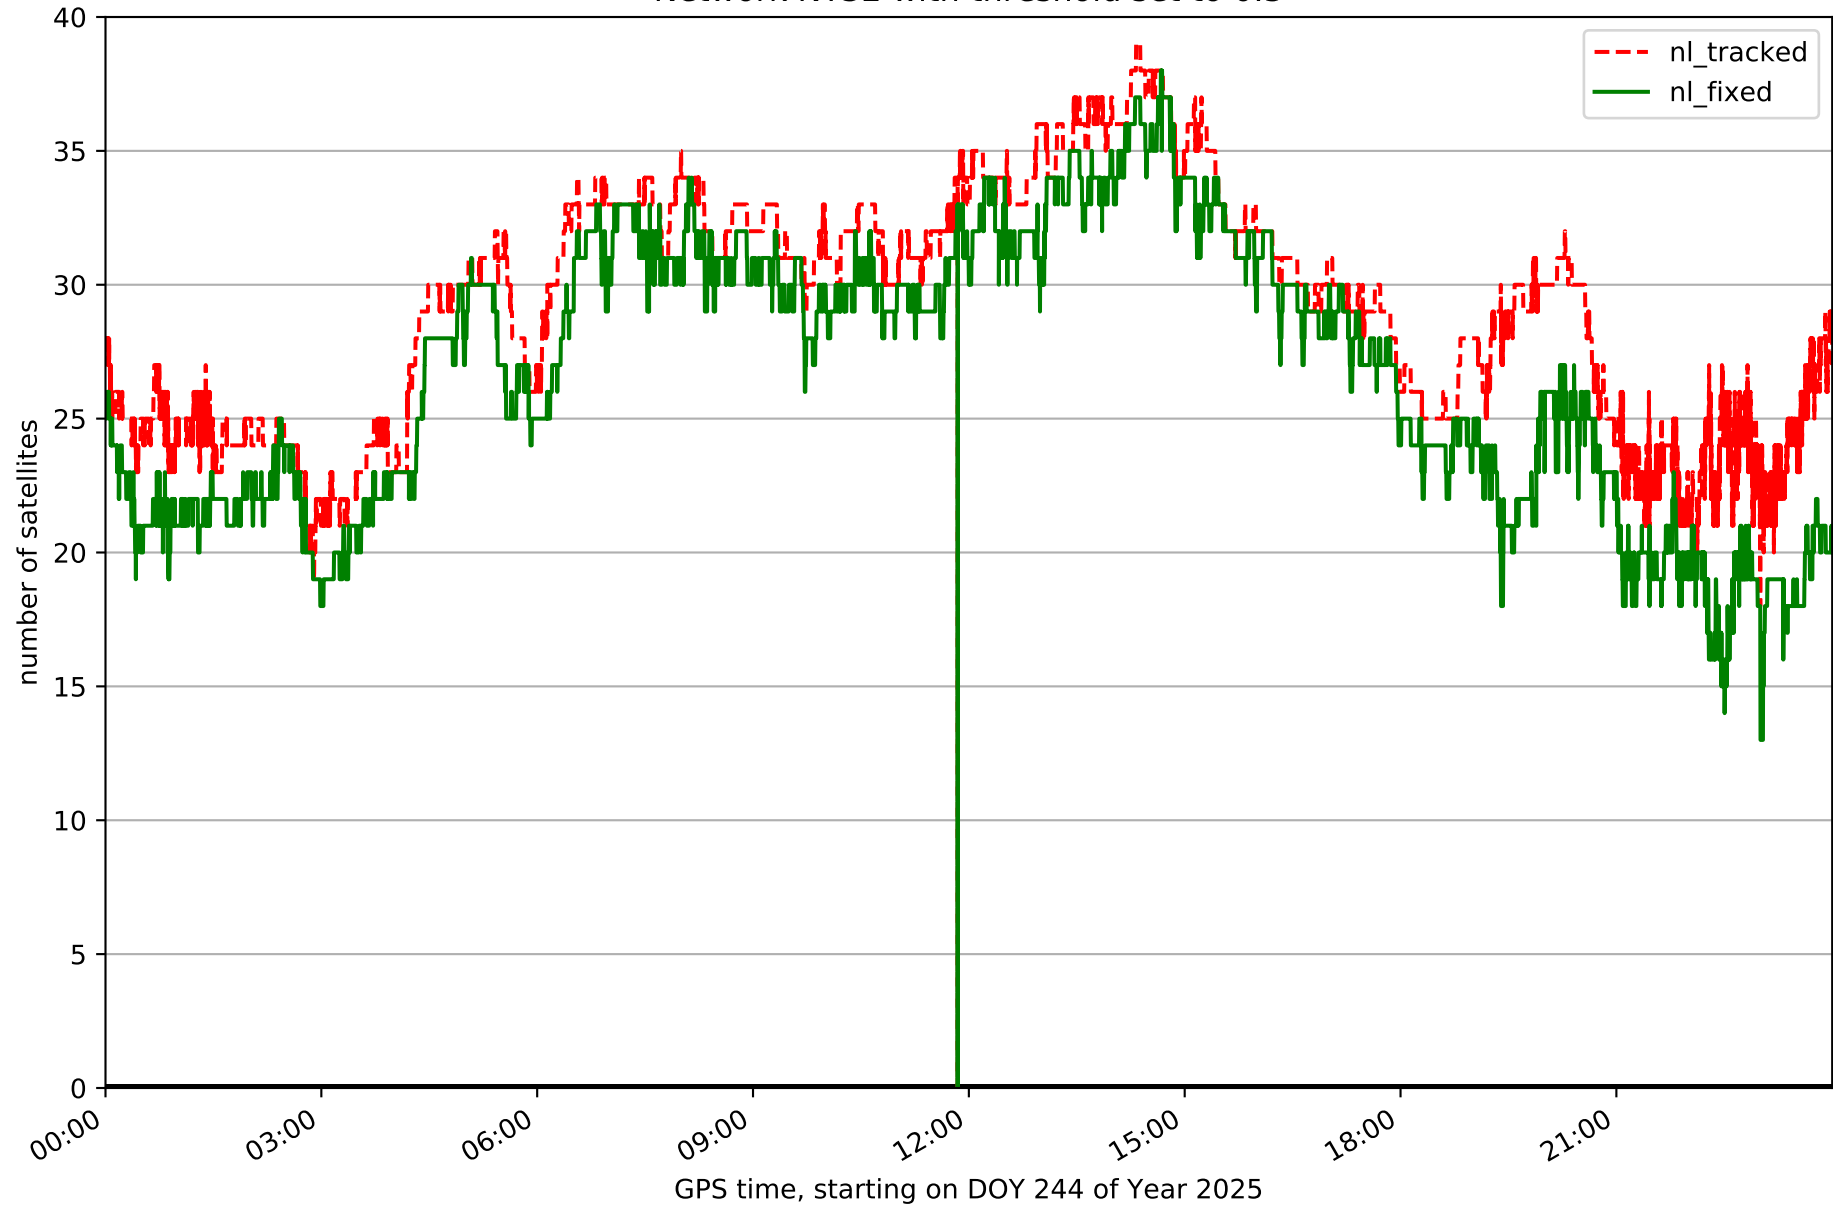


Fixing percentage of satellites in network NT32 with threshold set to 0.3

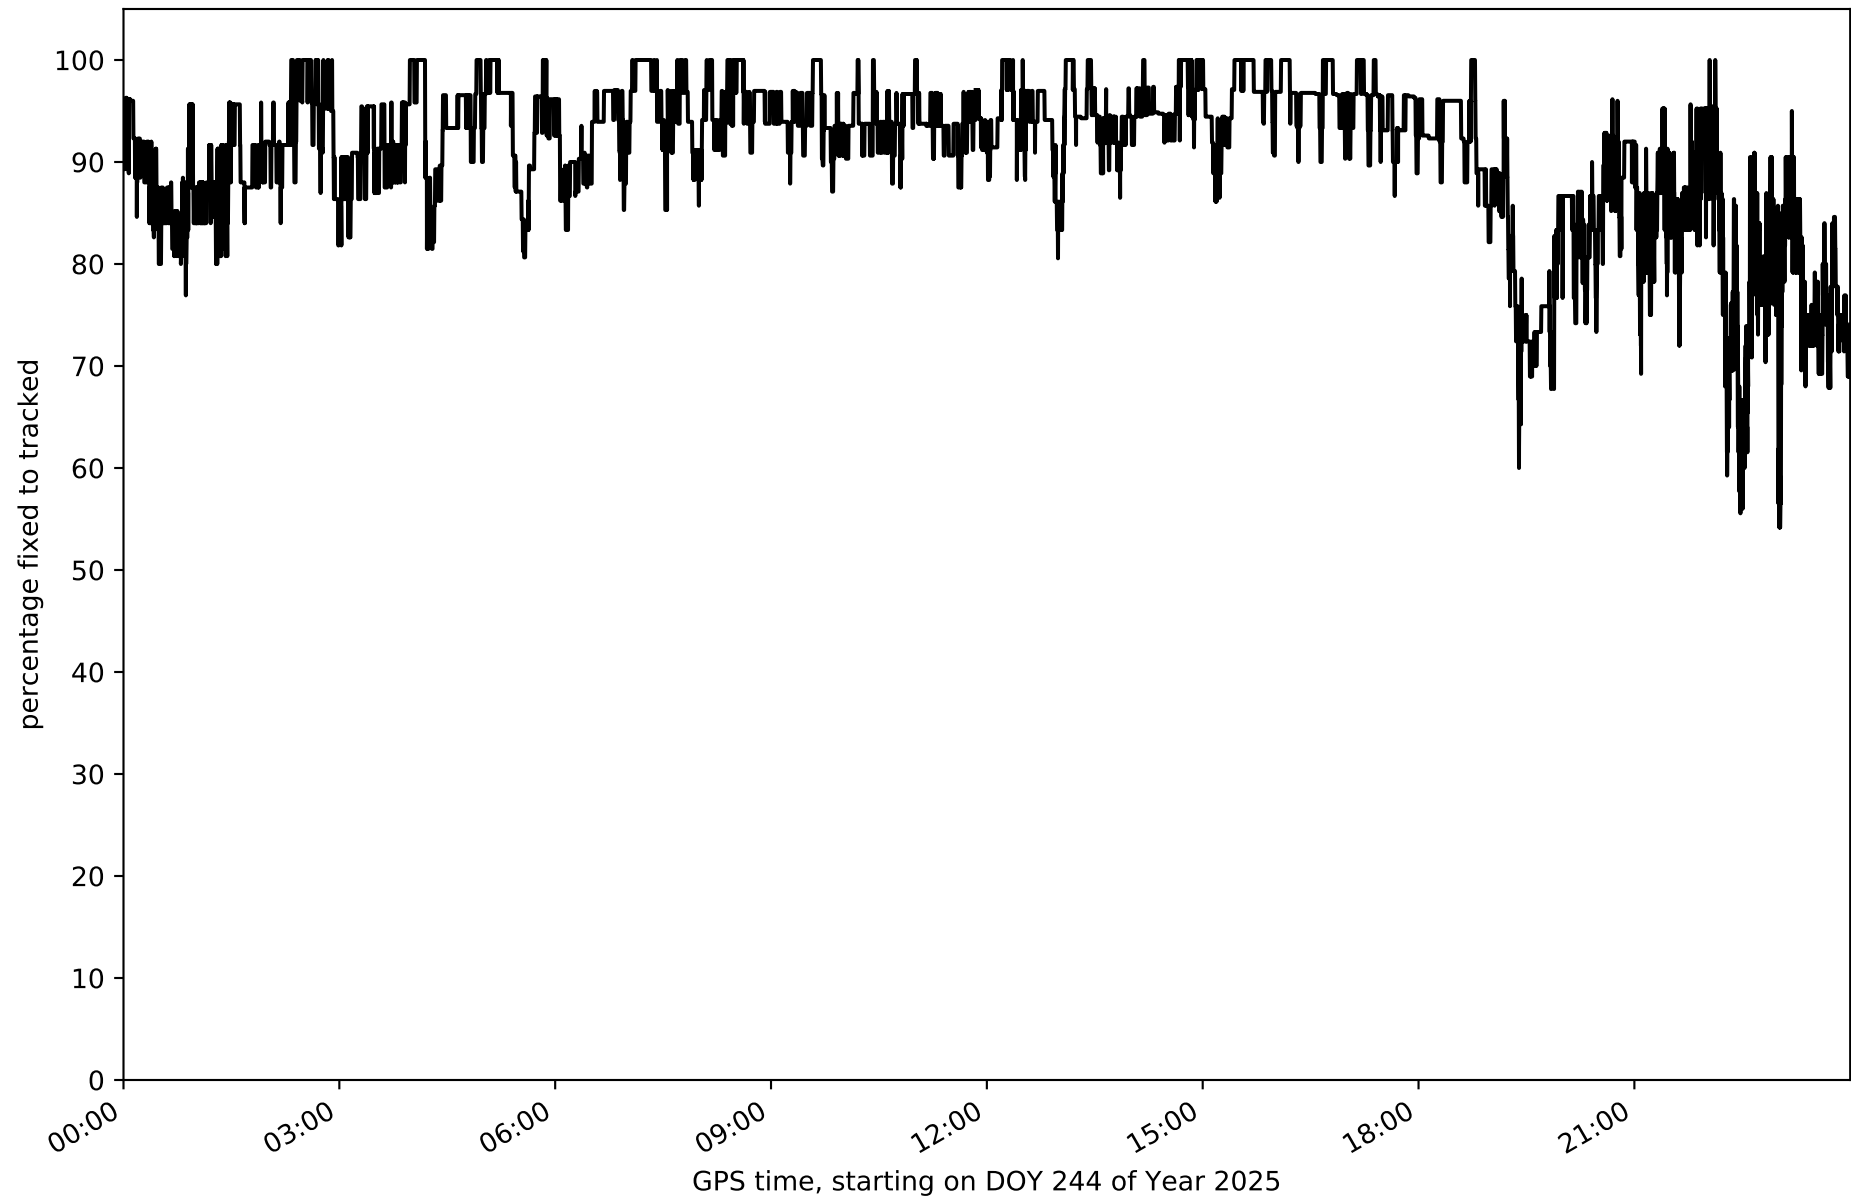


Network NT32 - only GPS with threshold set to 0.3

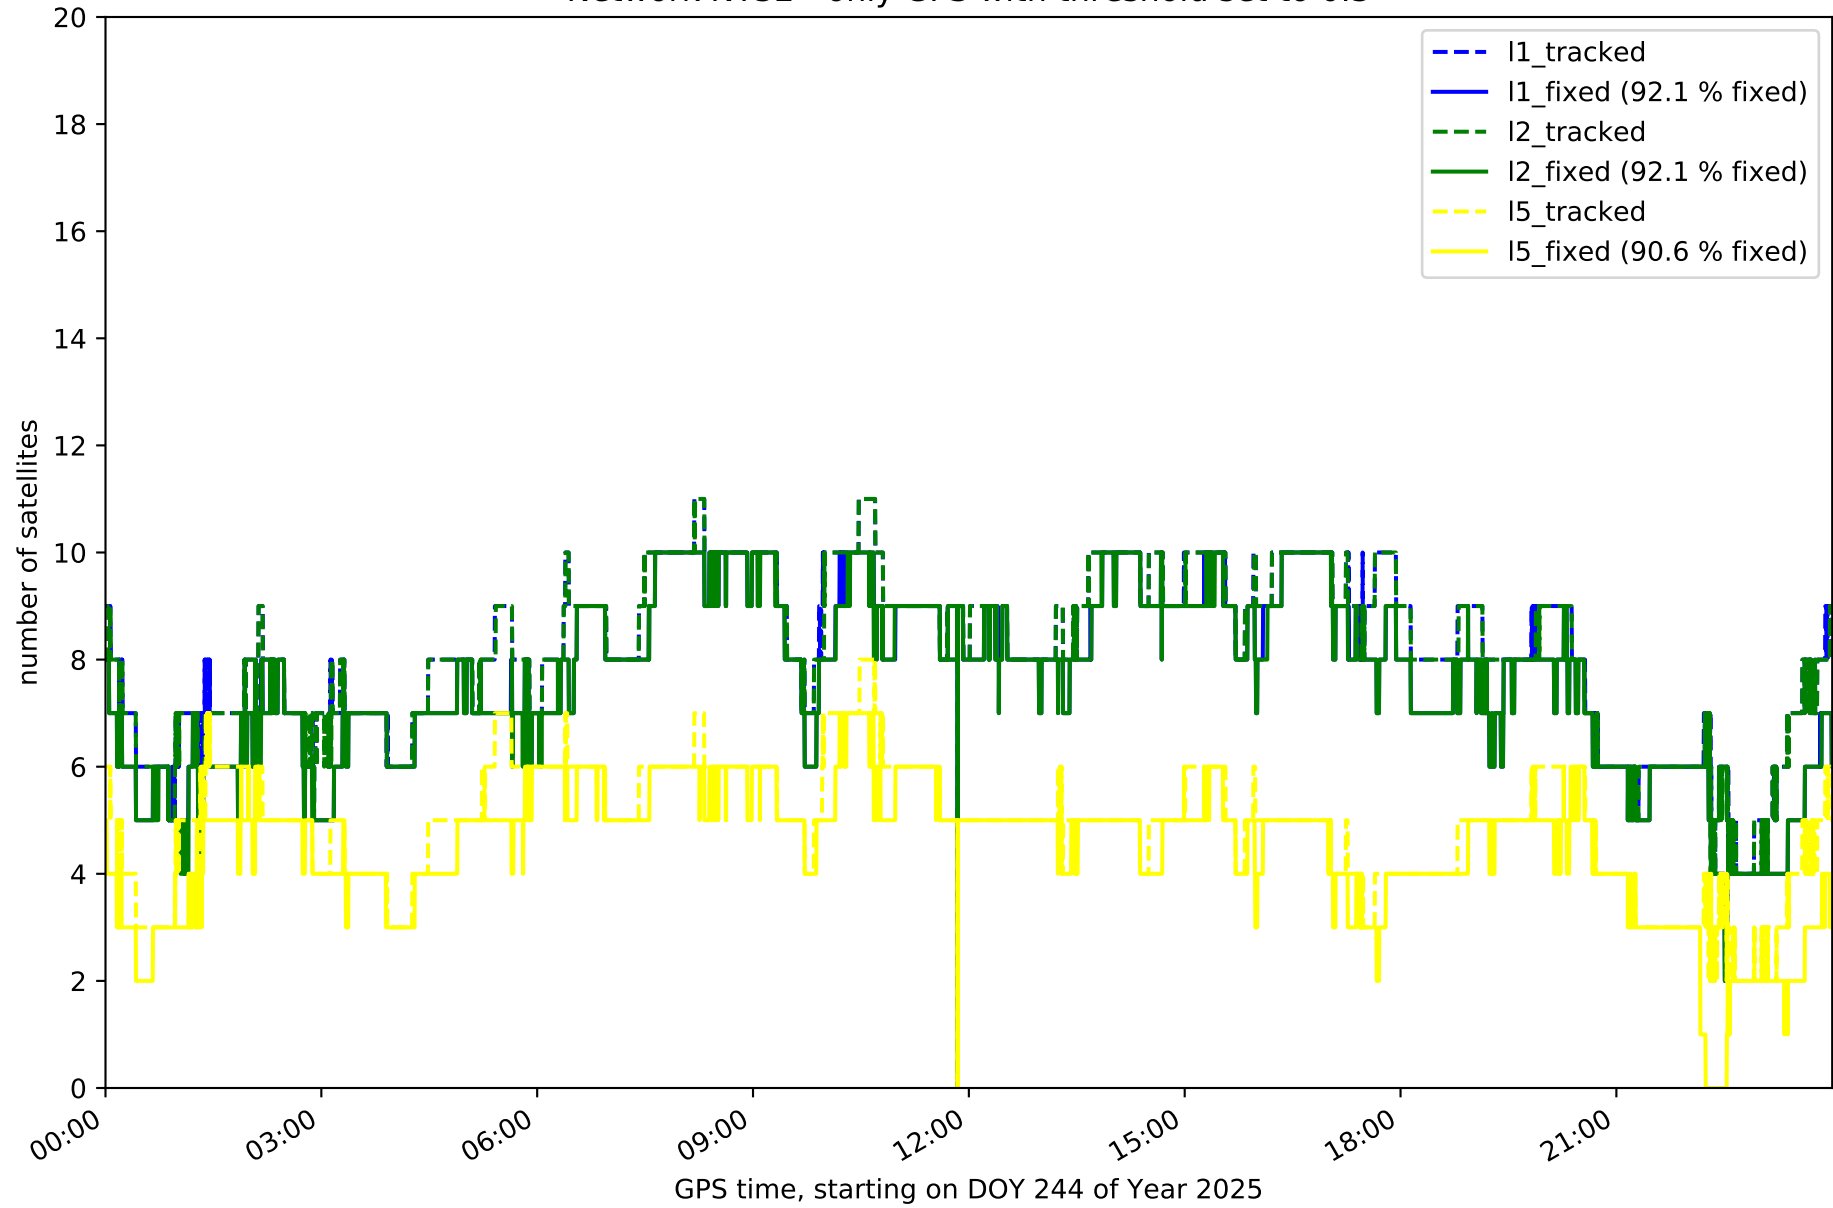


Network NT32 - only GLONASS with threshold set to 0.3

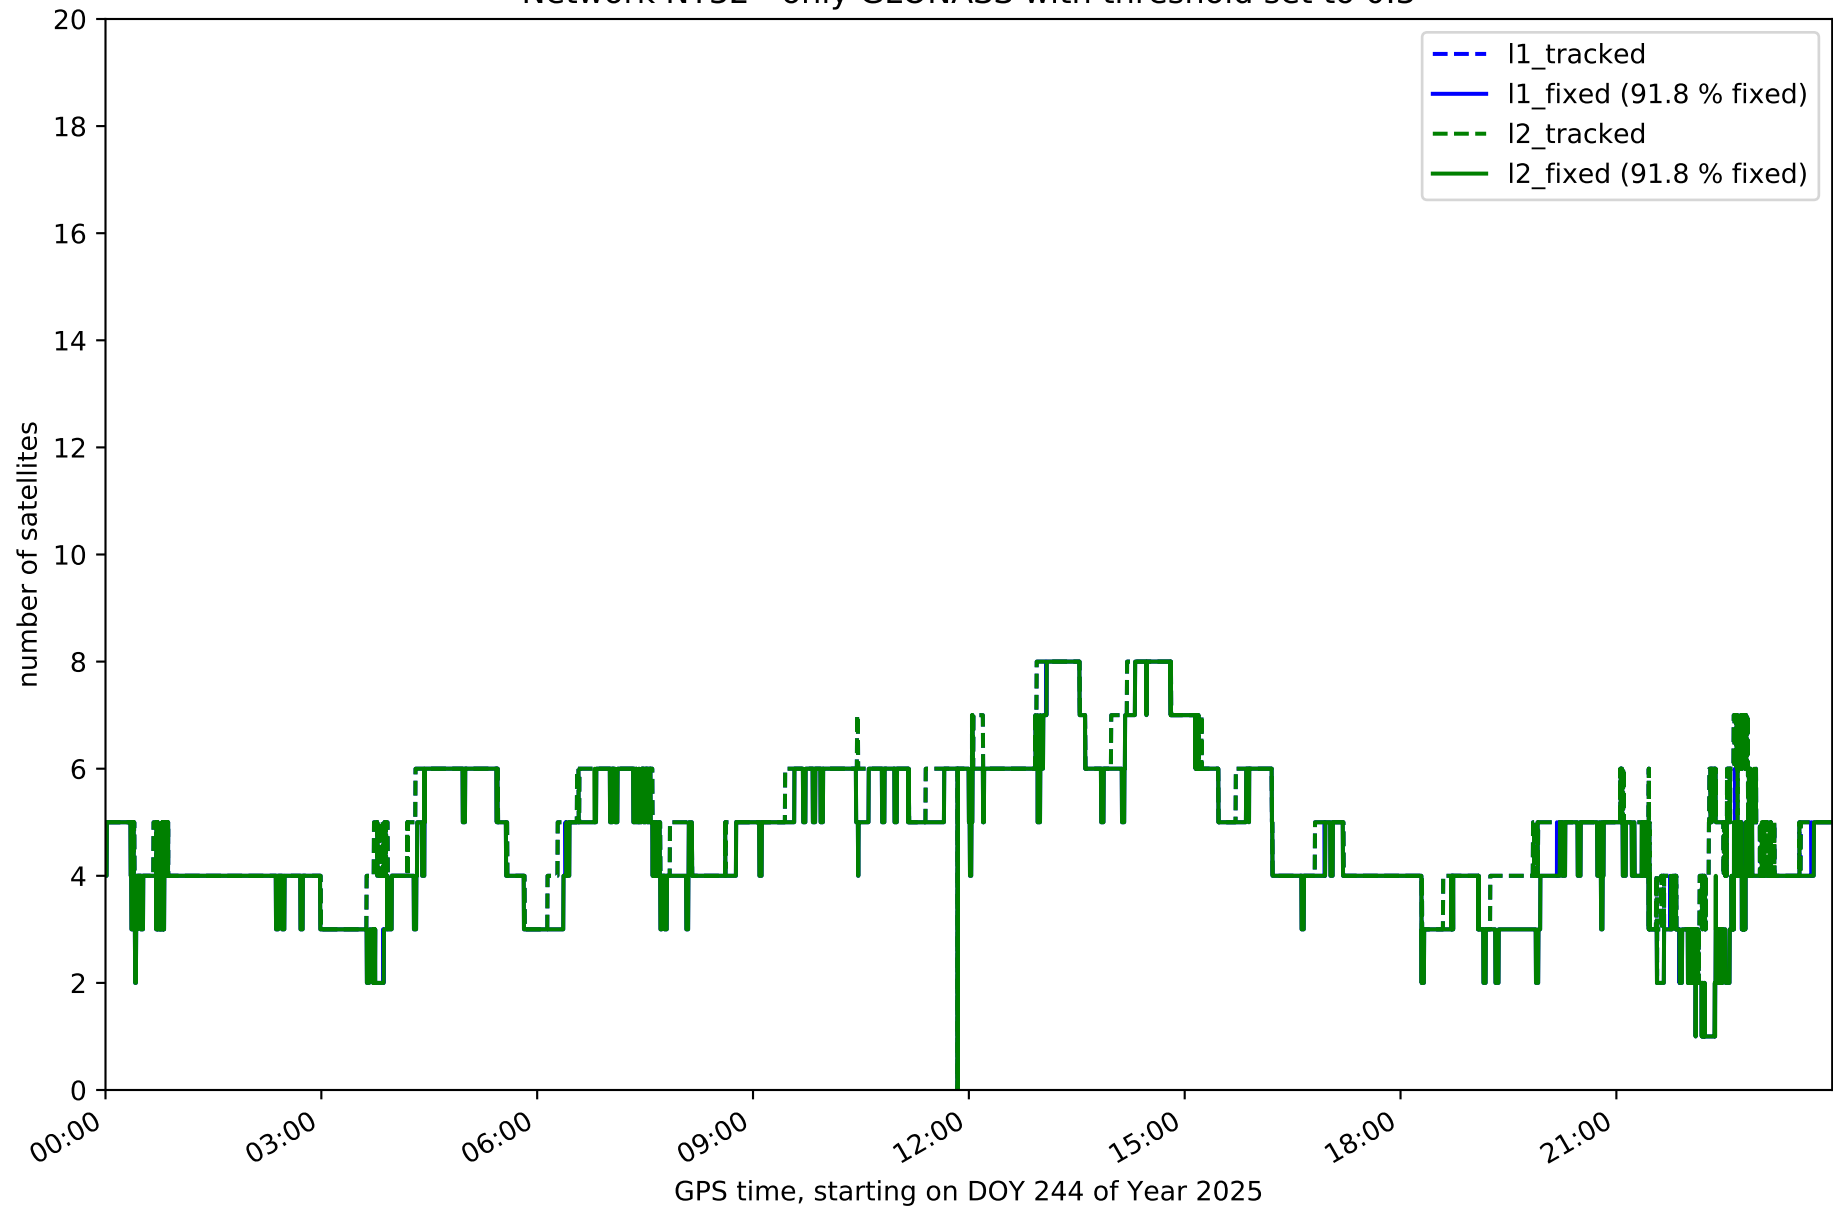


Network NT32 - only BDS with threshold set to 0.3

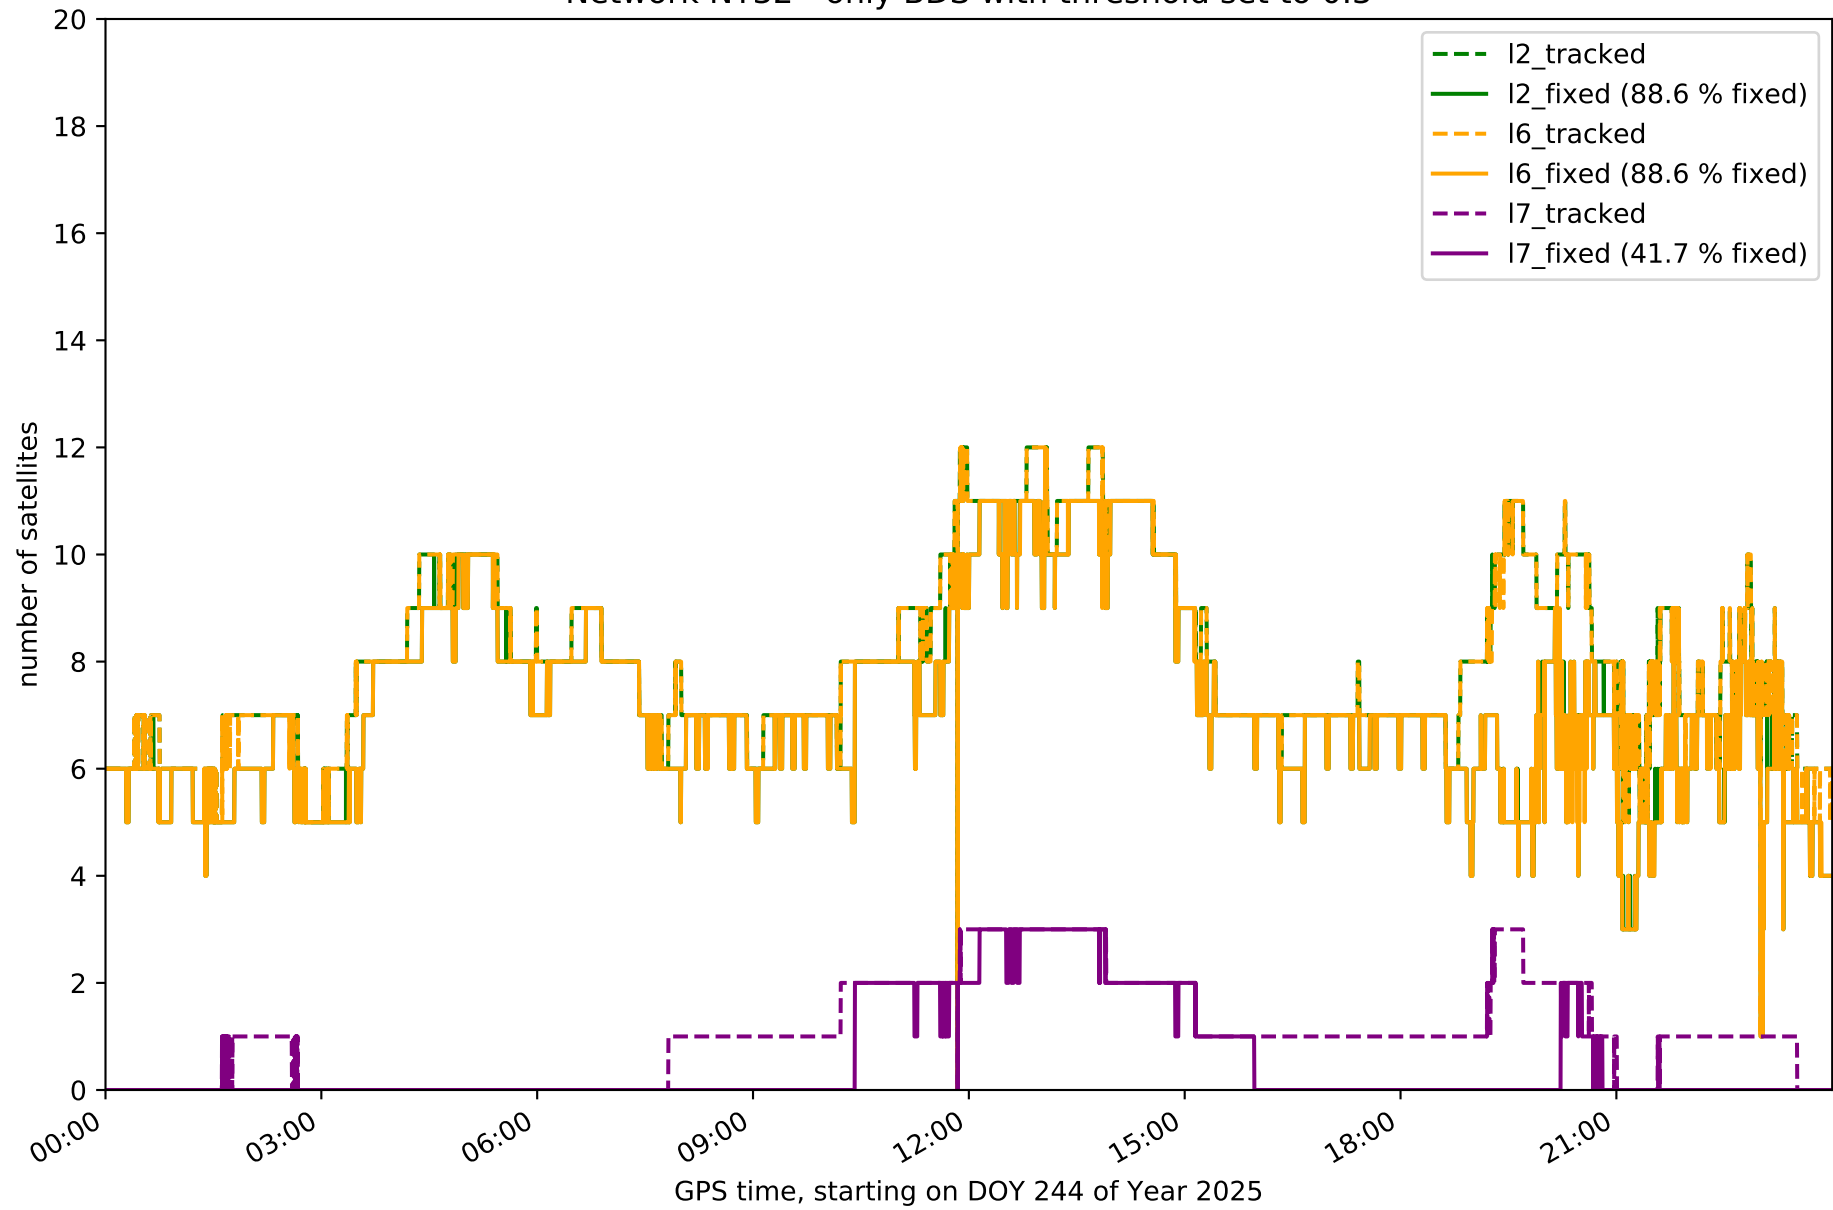


Network NT32 - only Galileo with threshold set to 0.3

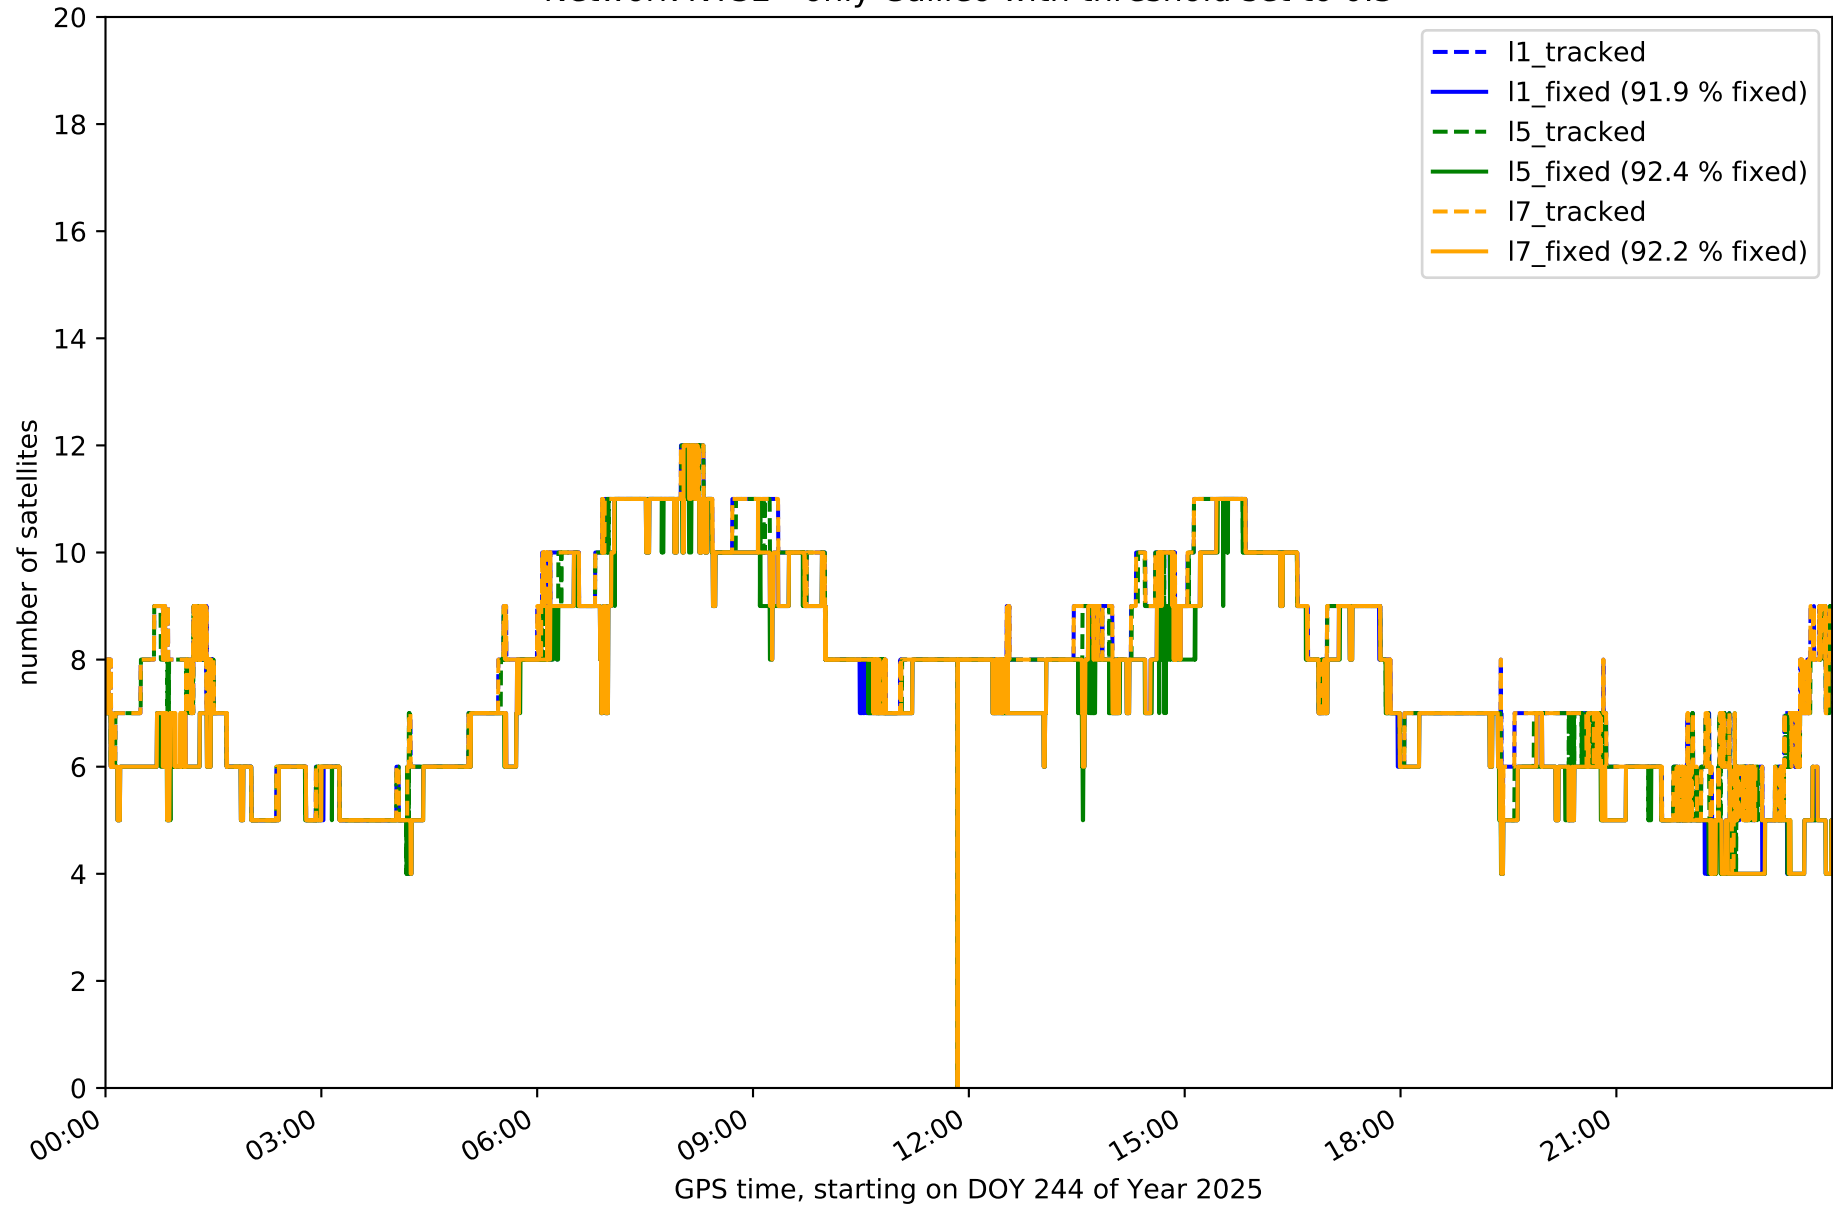


Station EH01 in network NT32

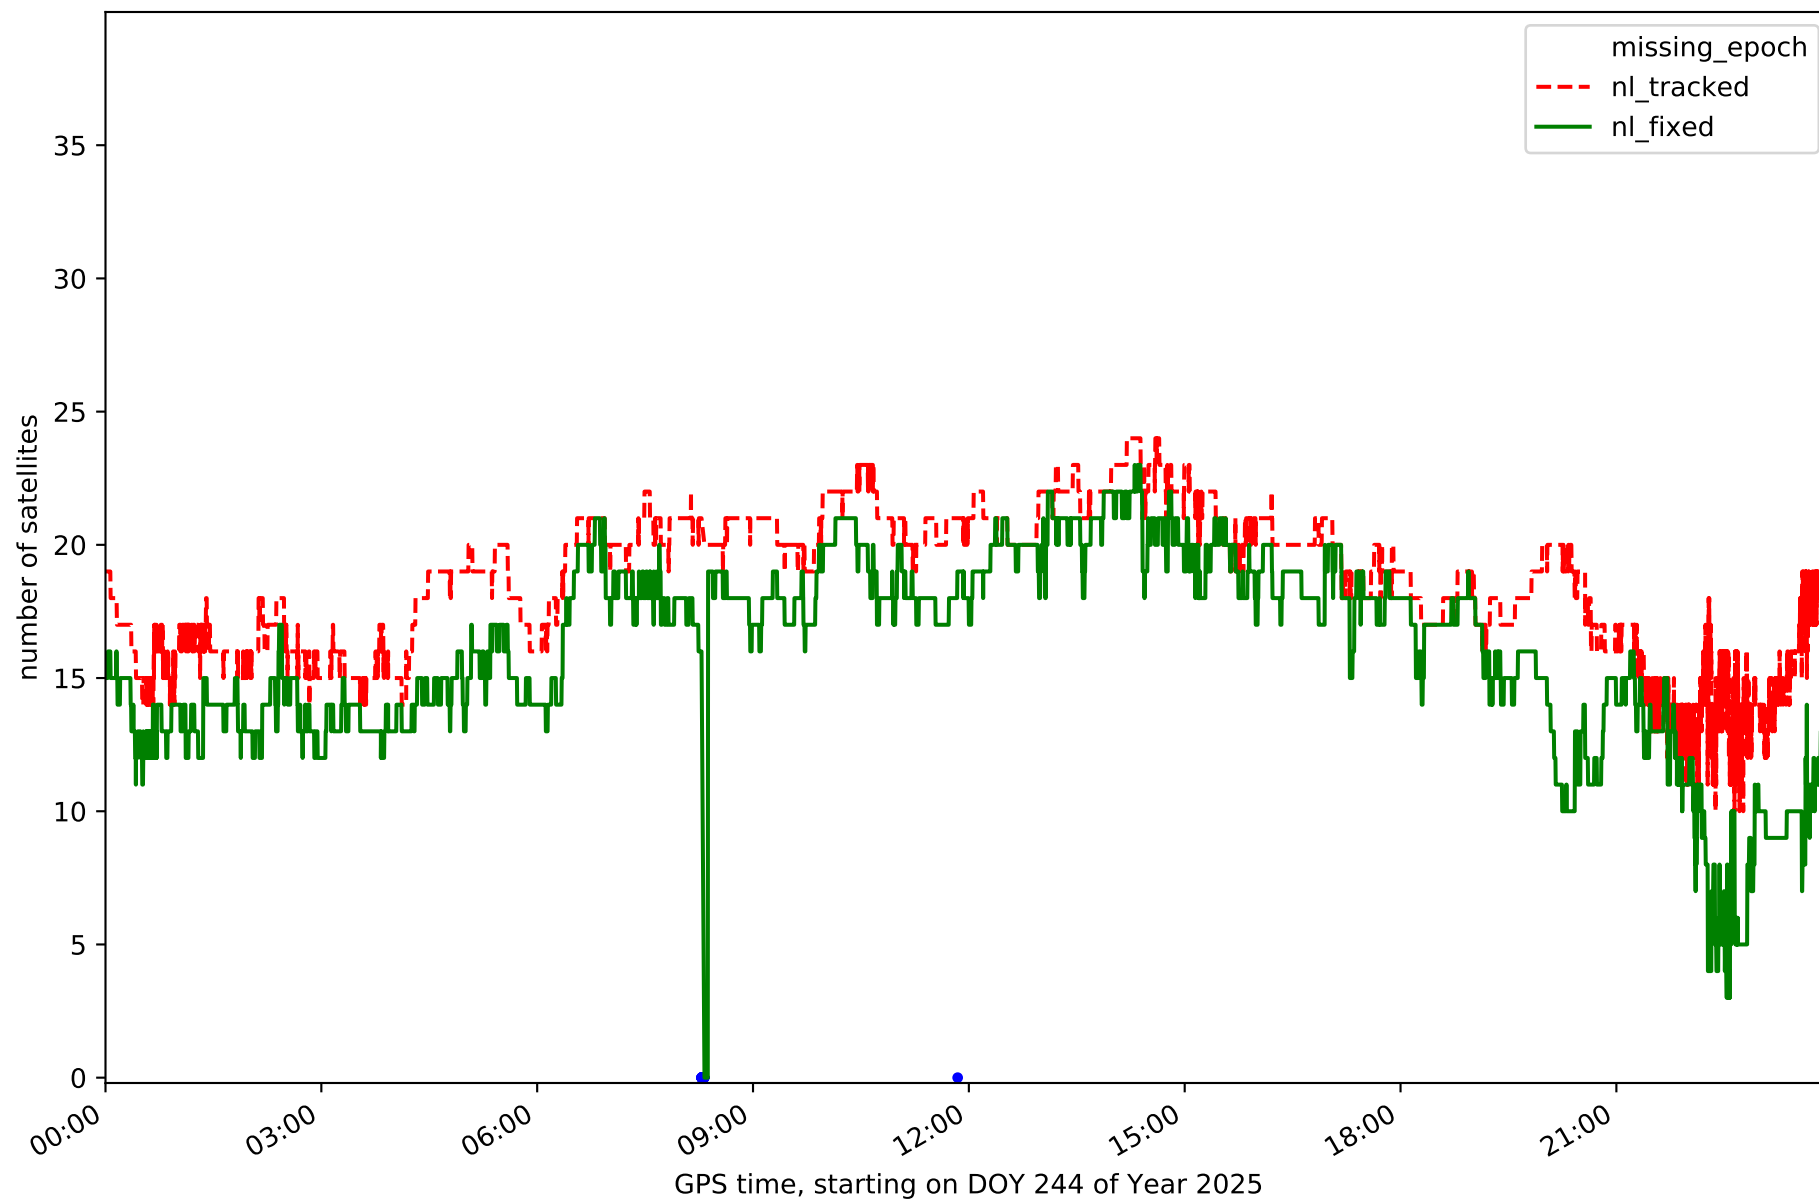


Station EH02 in network NT32

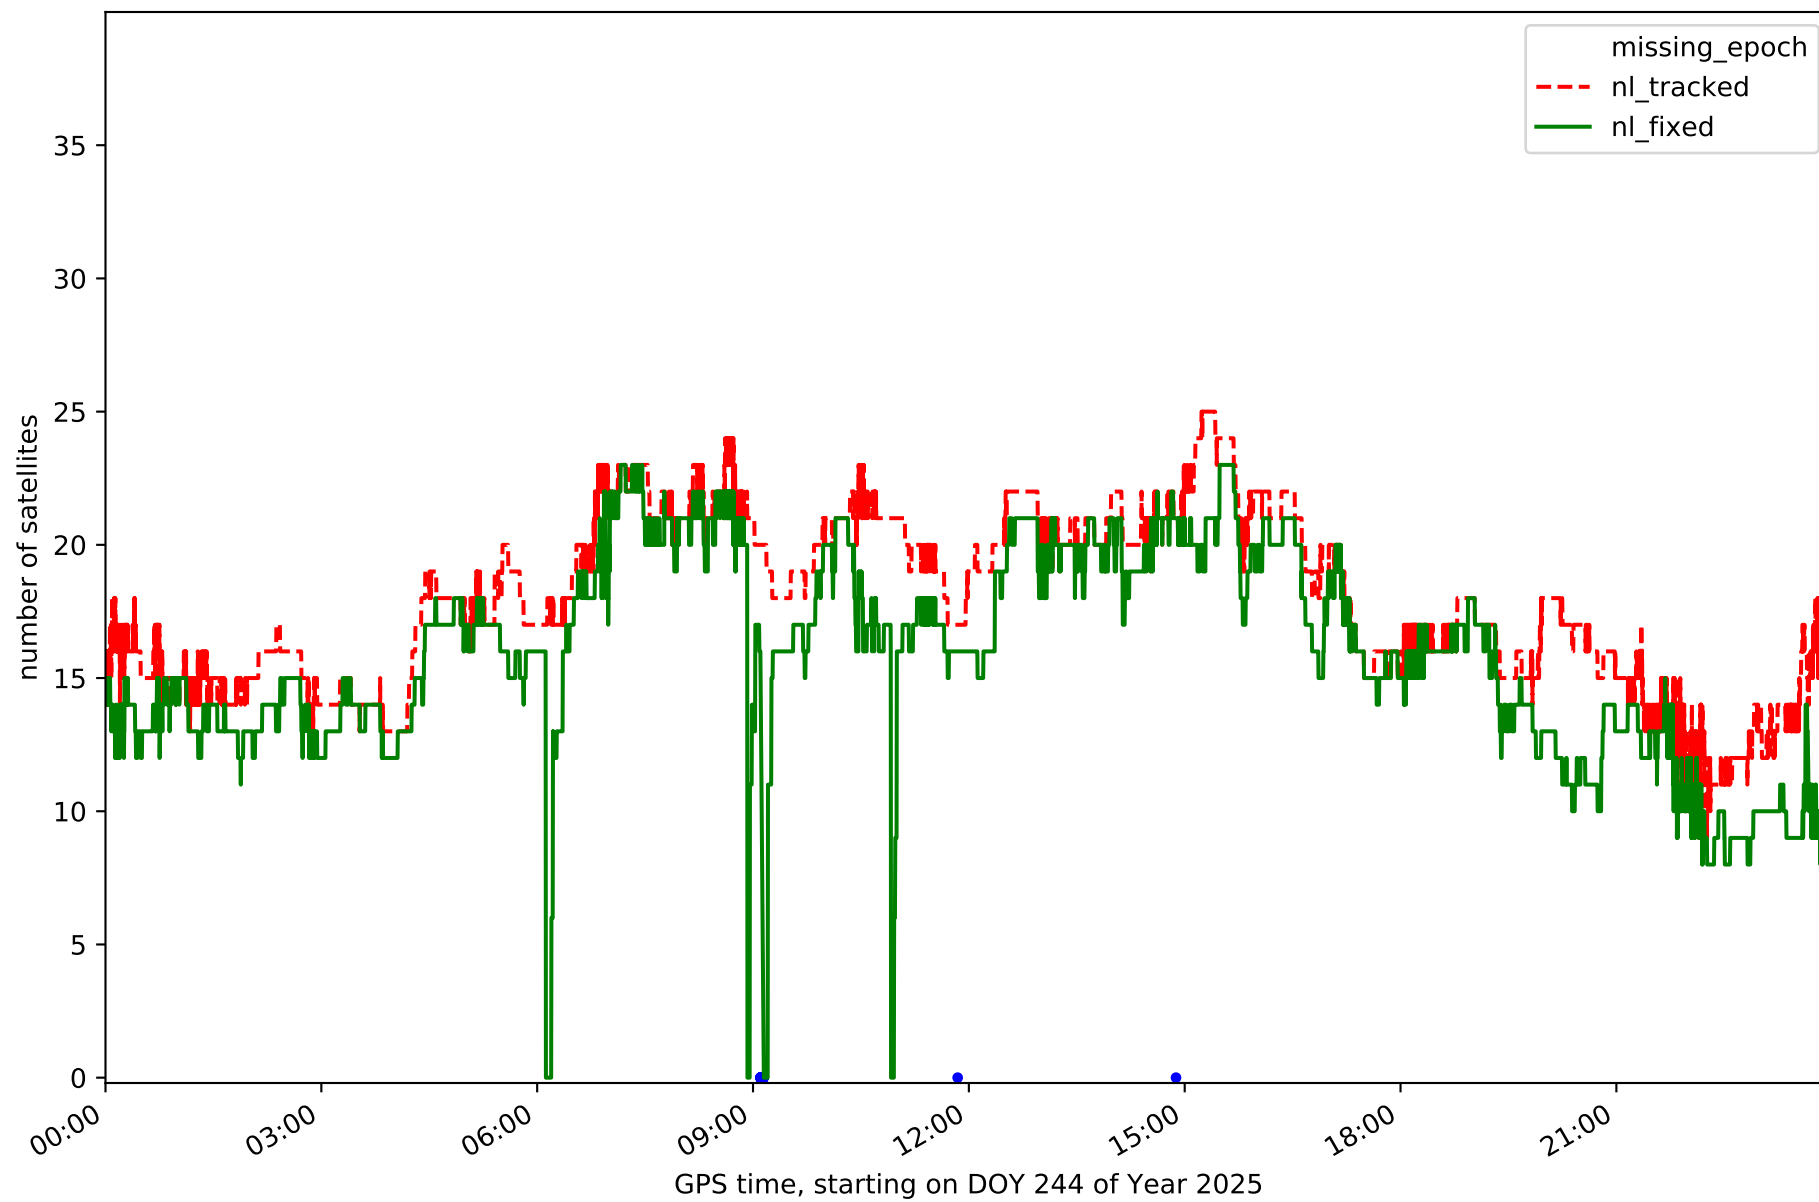


Station GOM1 in network NT32

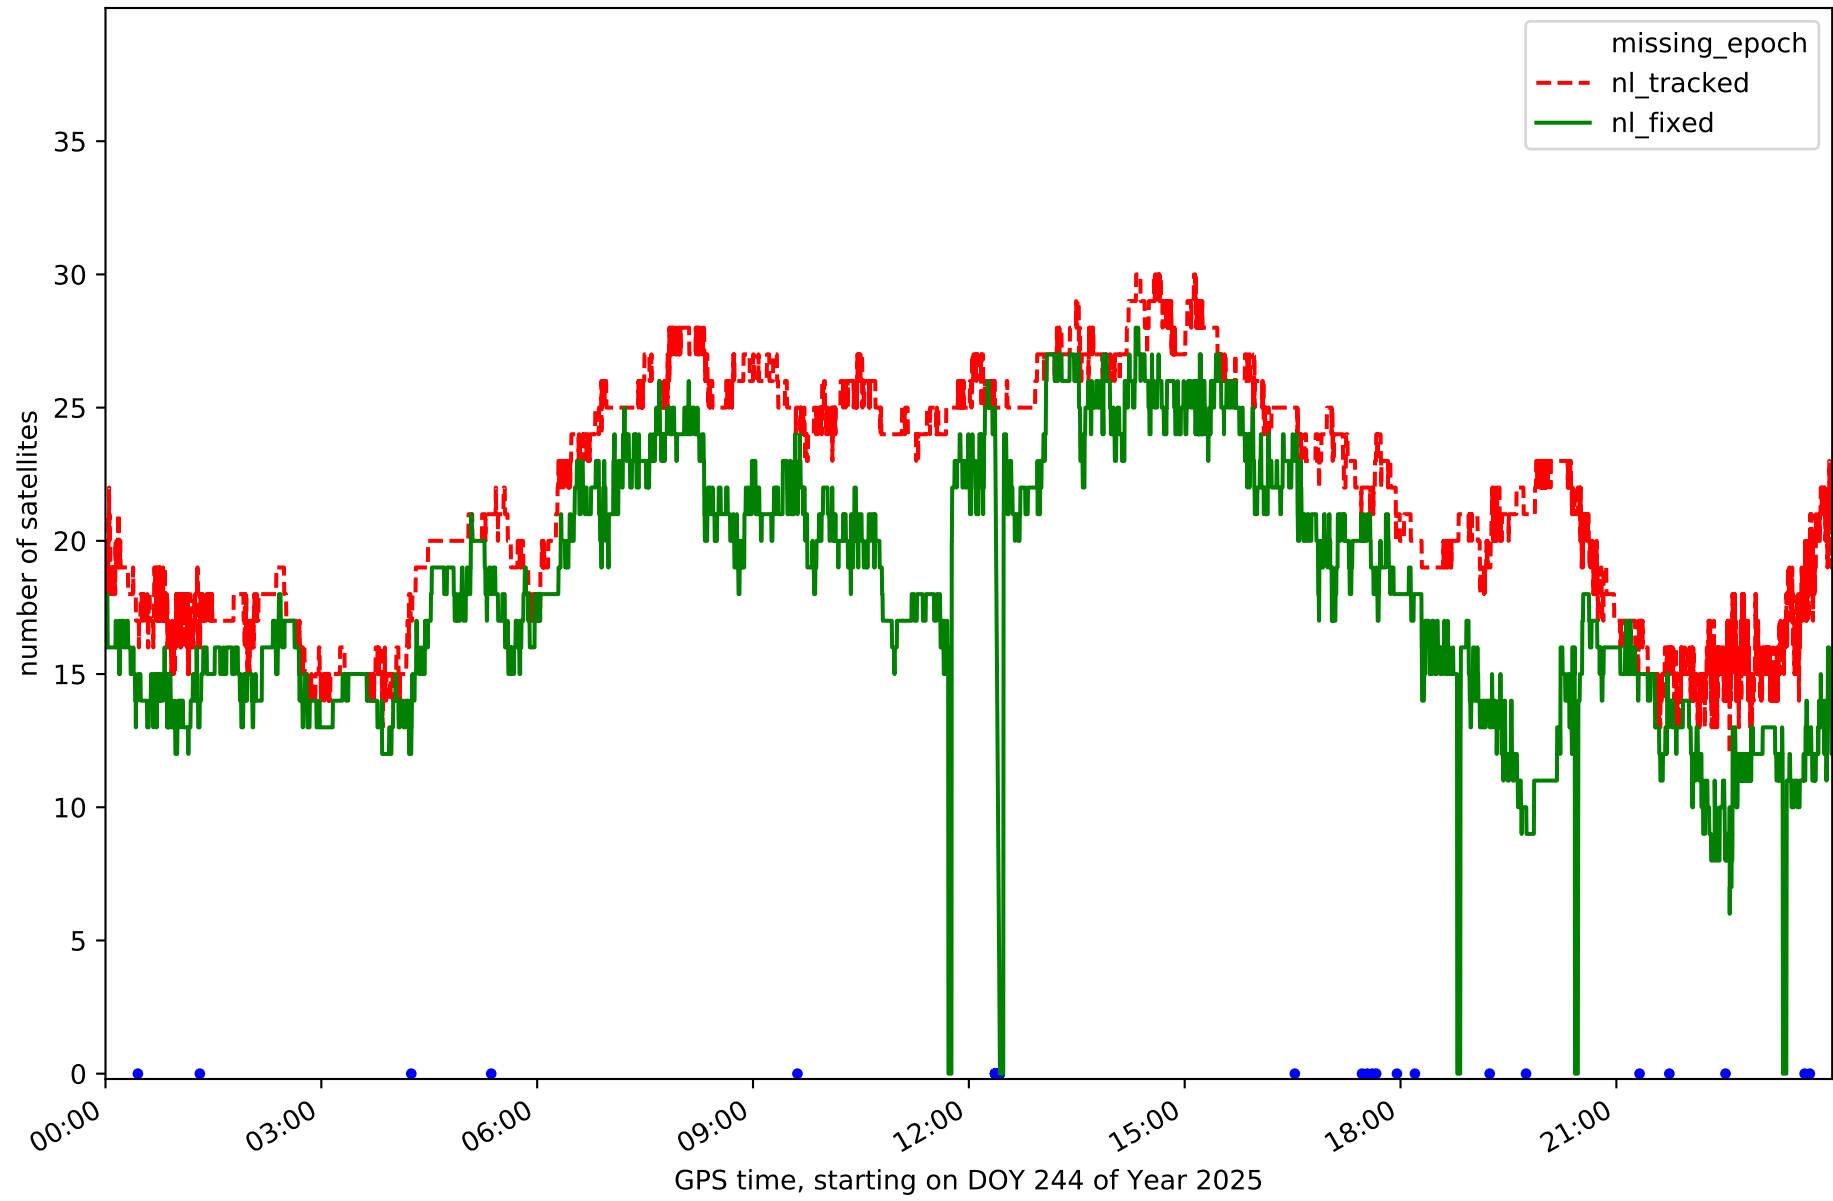


Station IZAN in network NT32

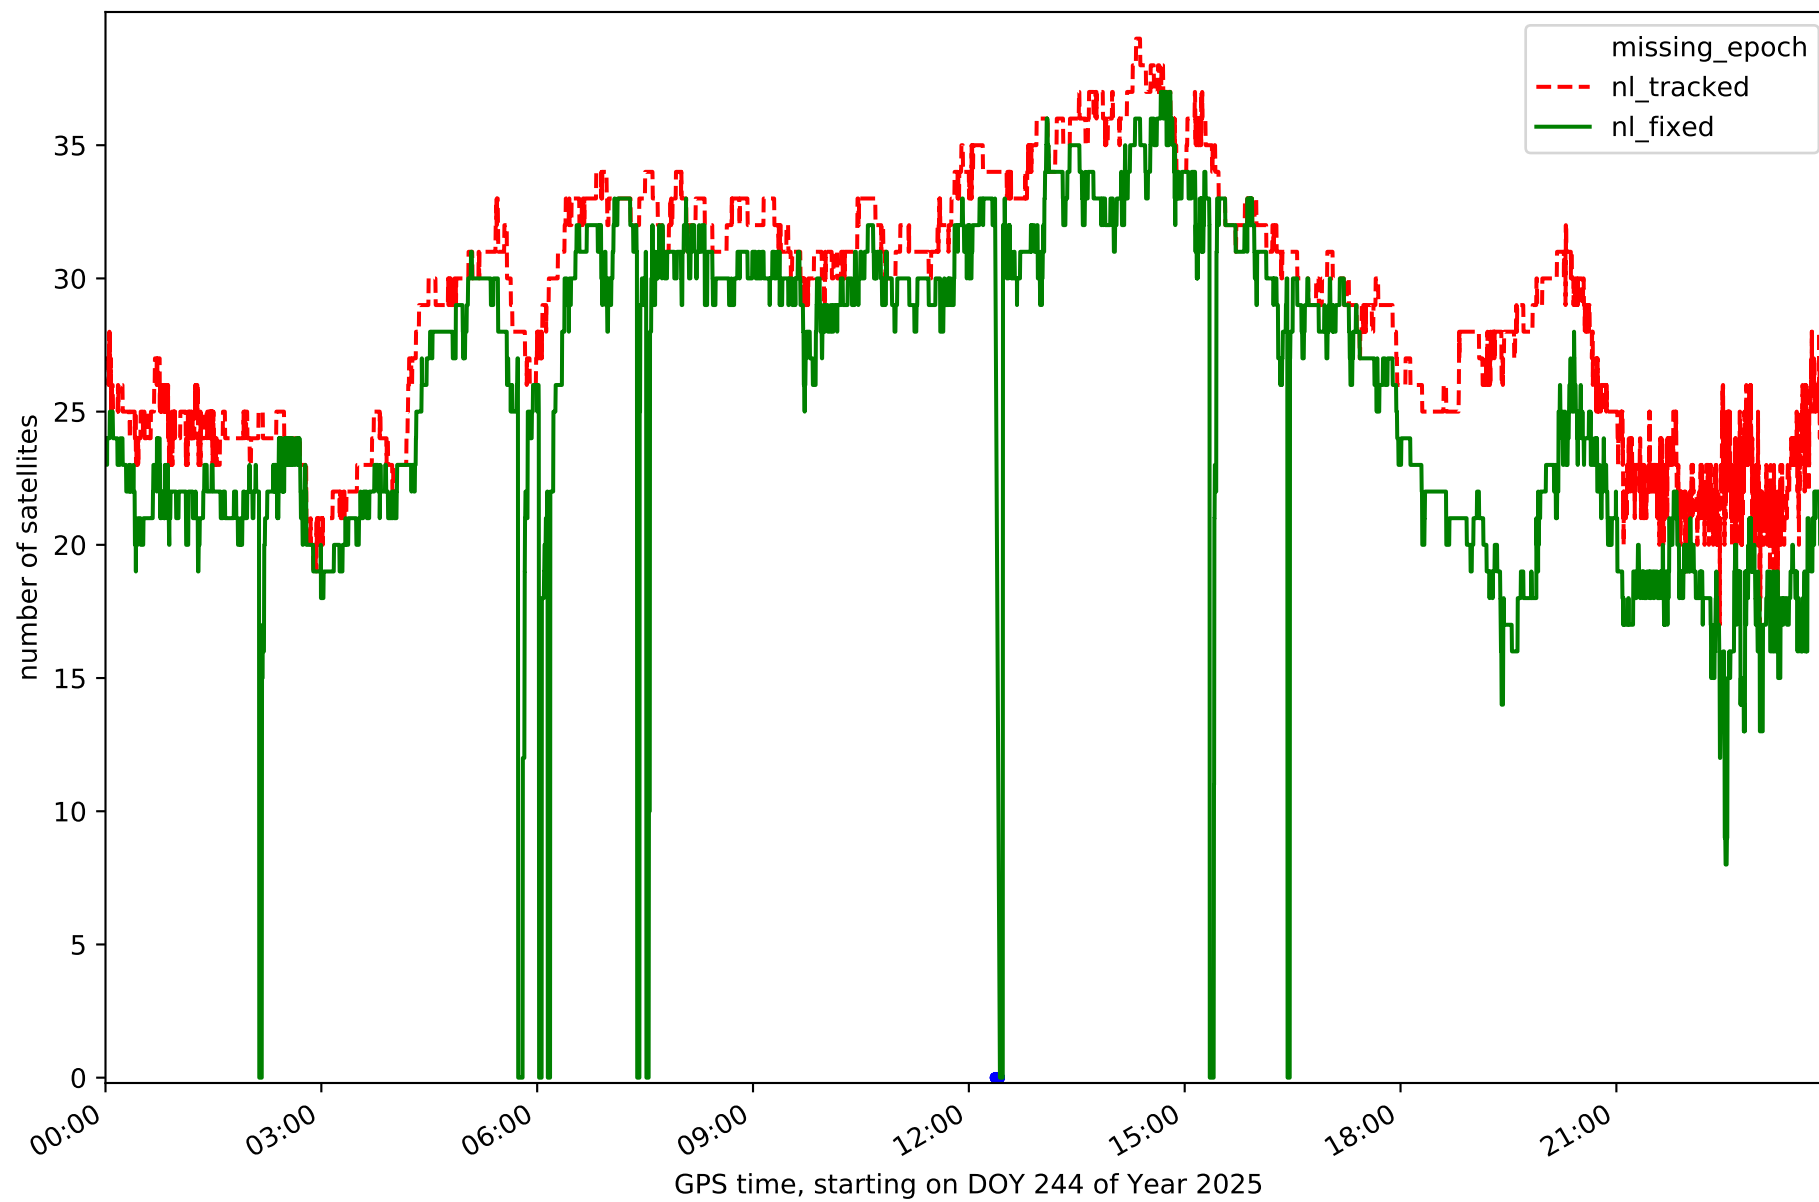


Station LP01 in network NT32

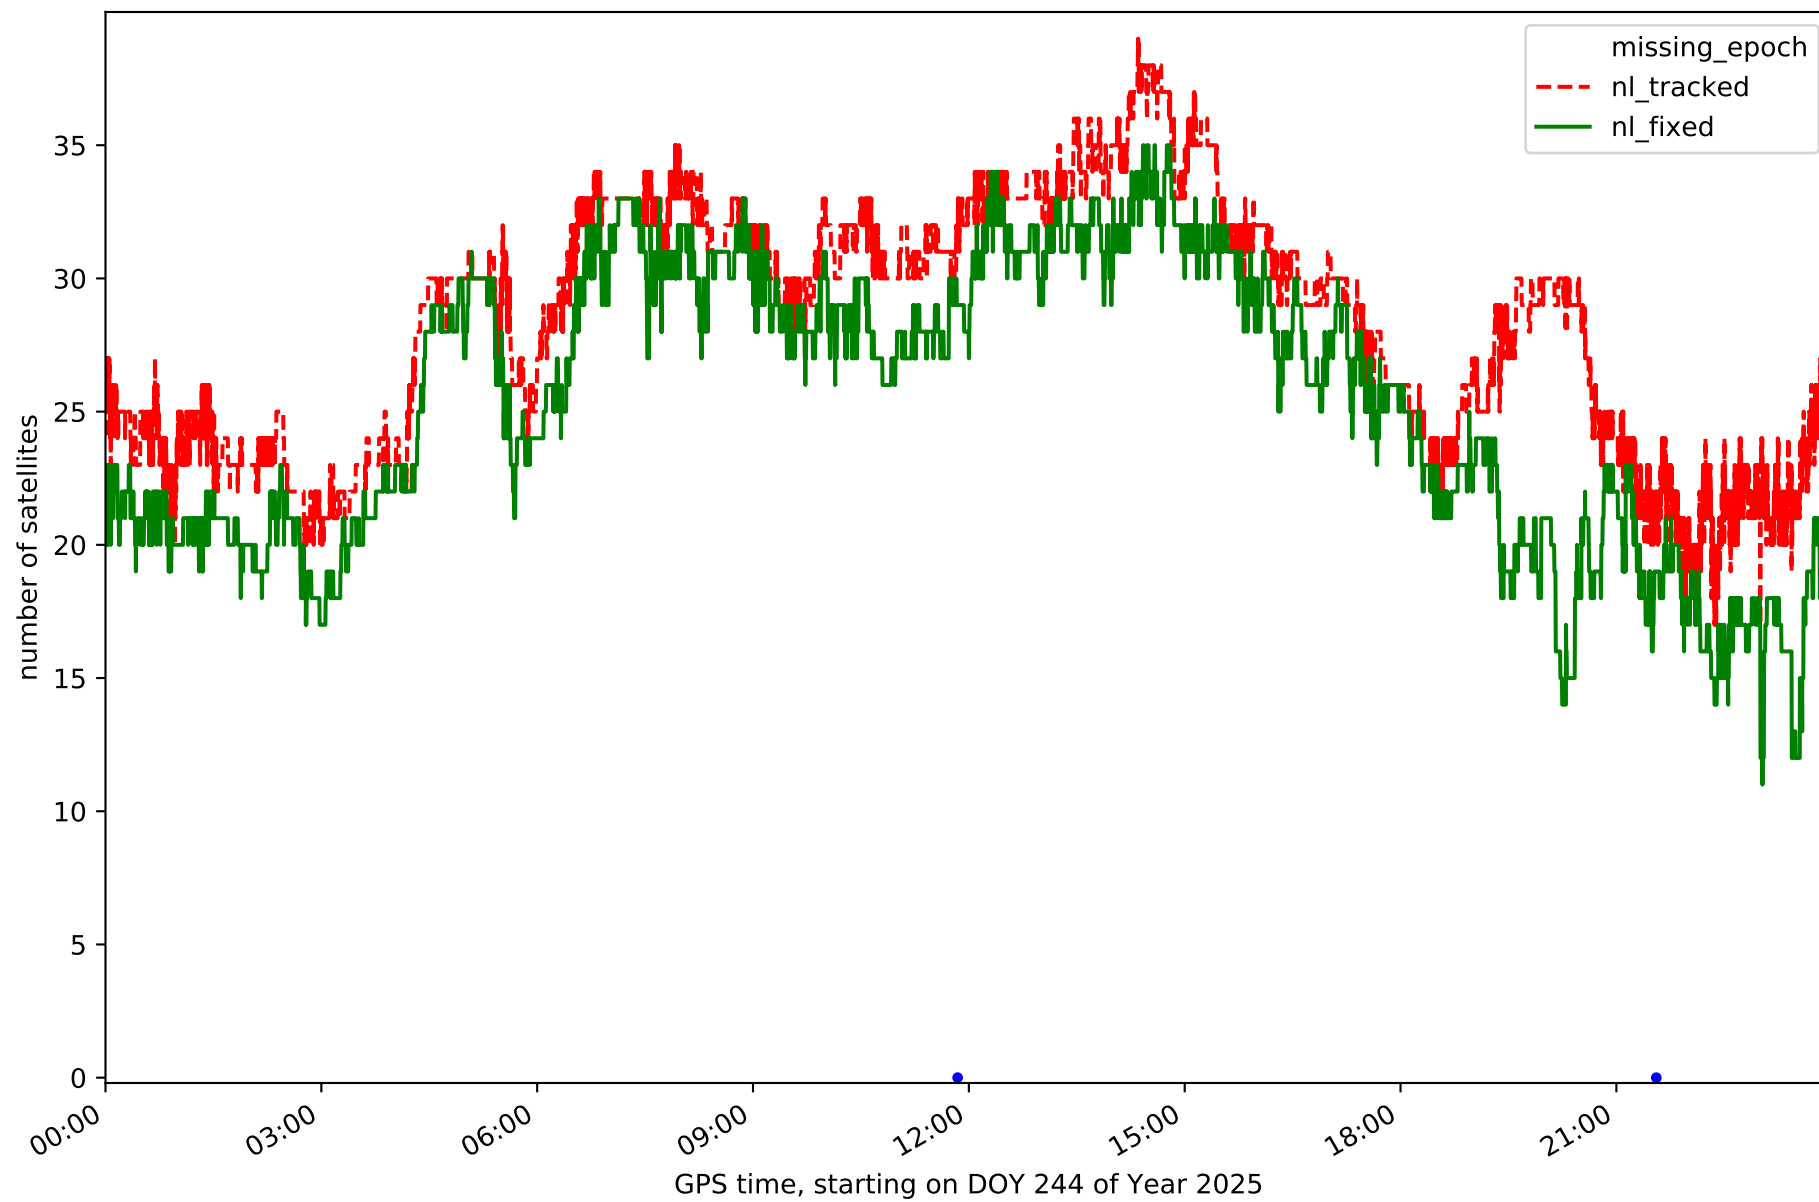


Station LP03 in network NT32

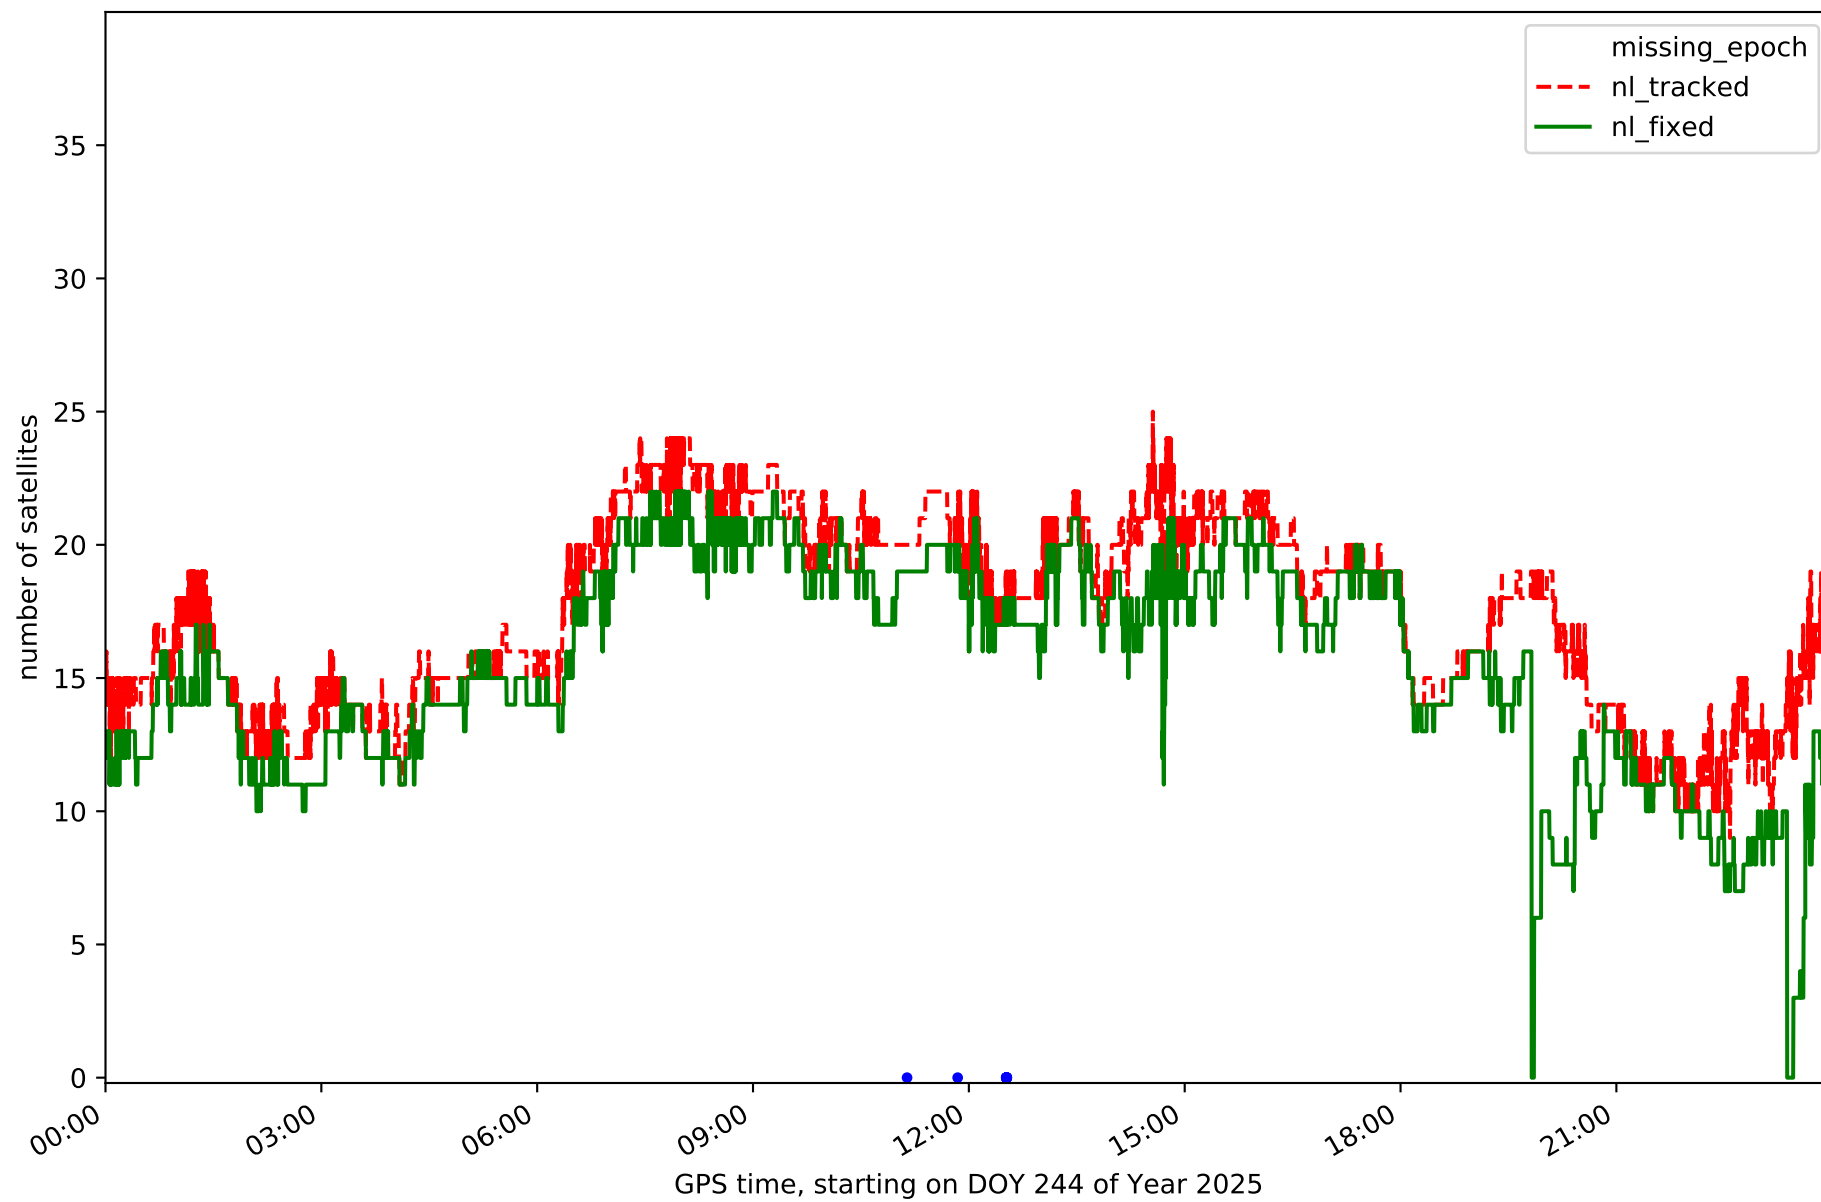


Station LPAL in network NT32

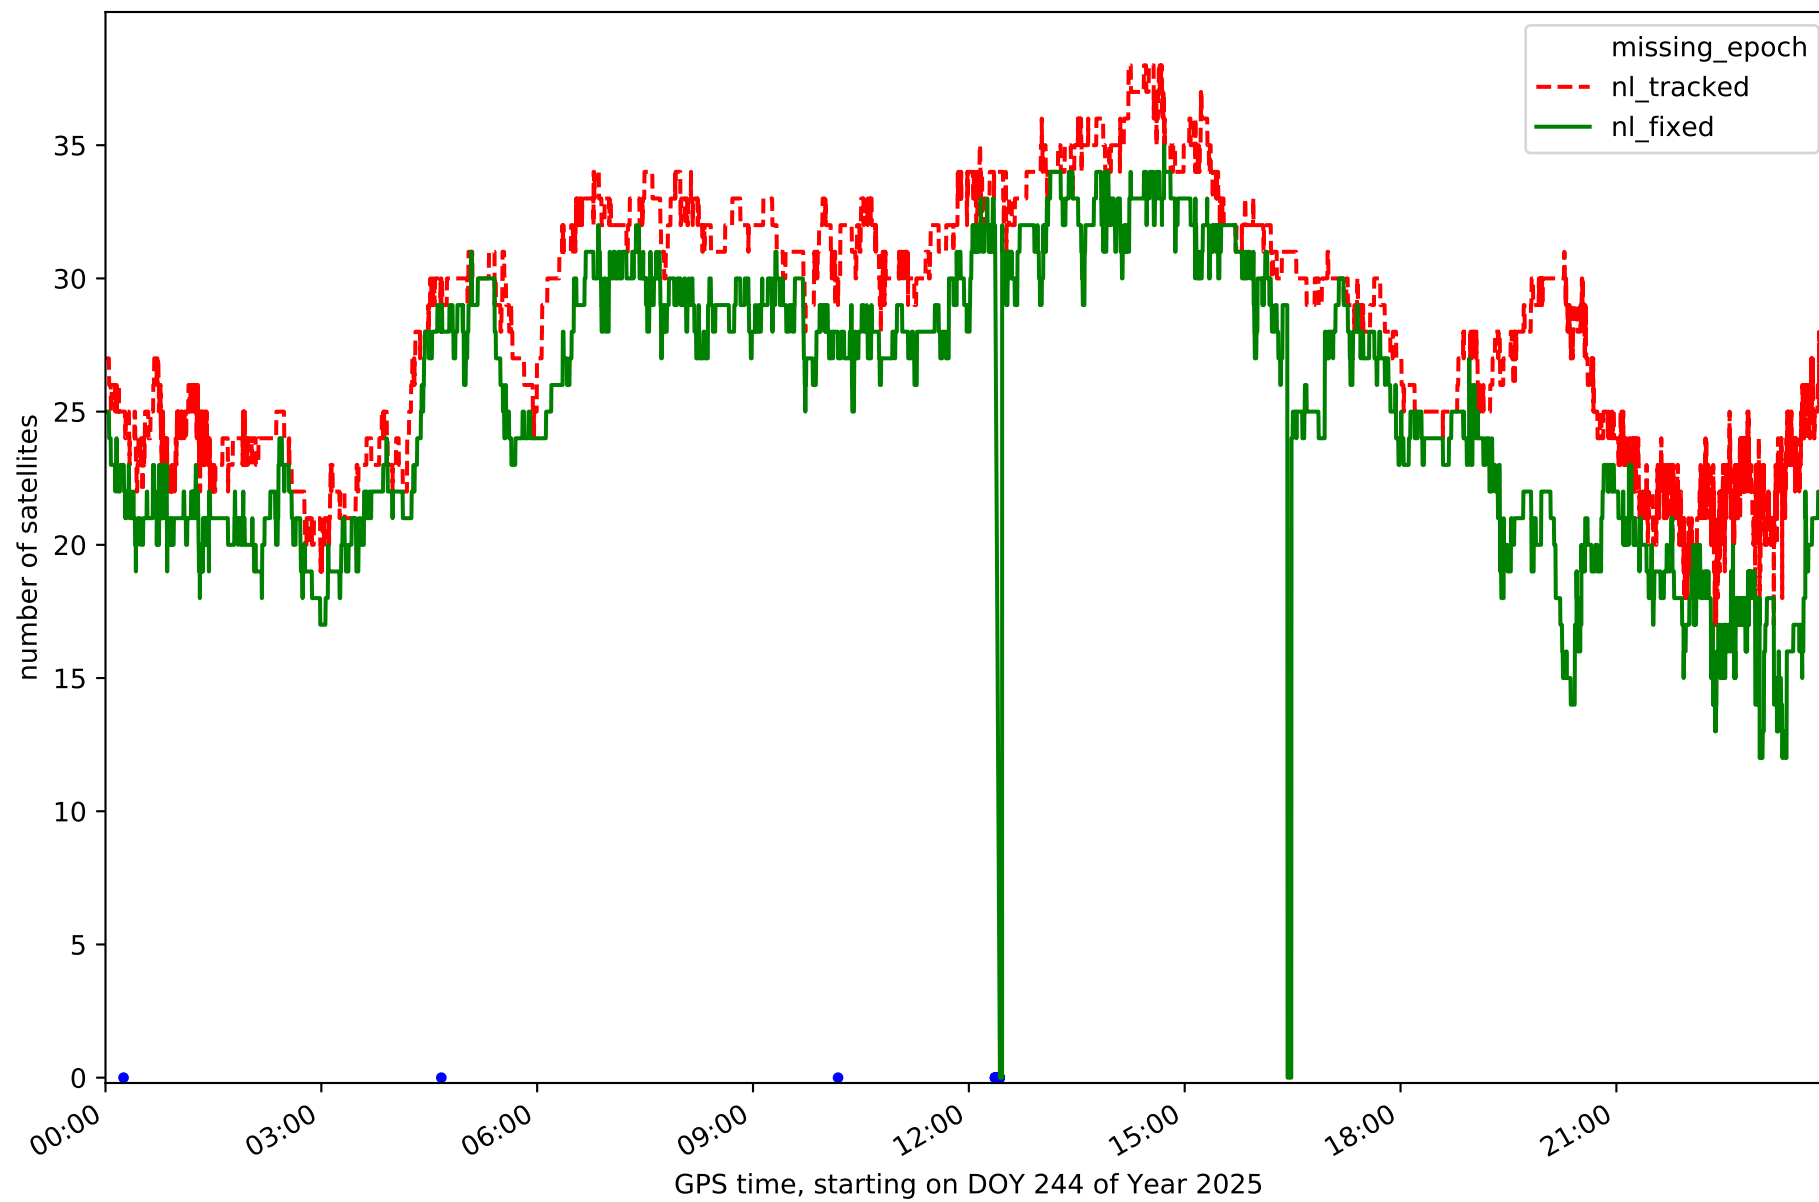


Station LRES in network NT32

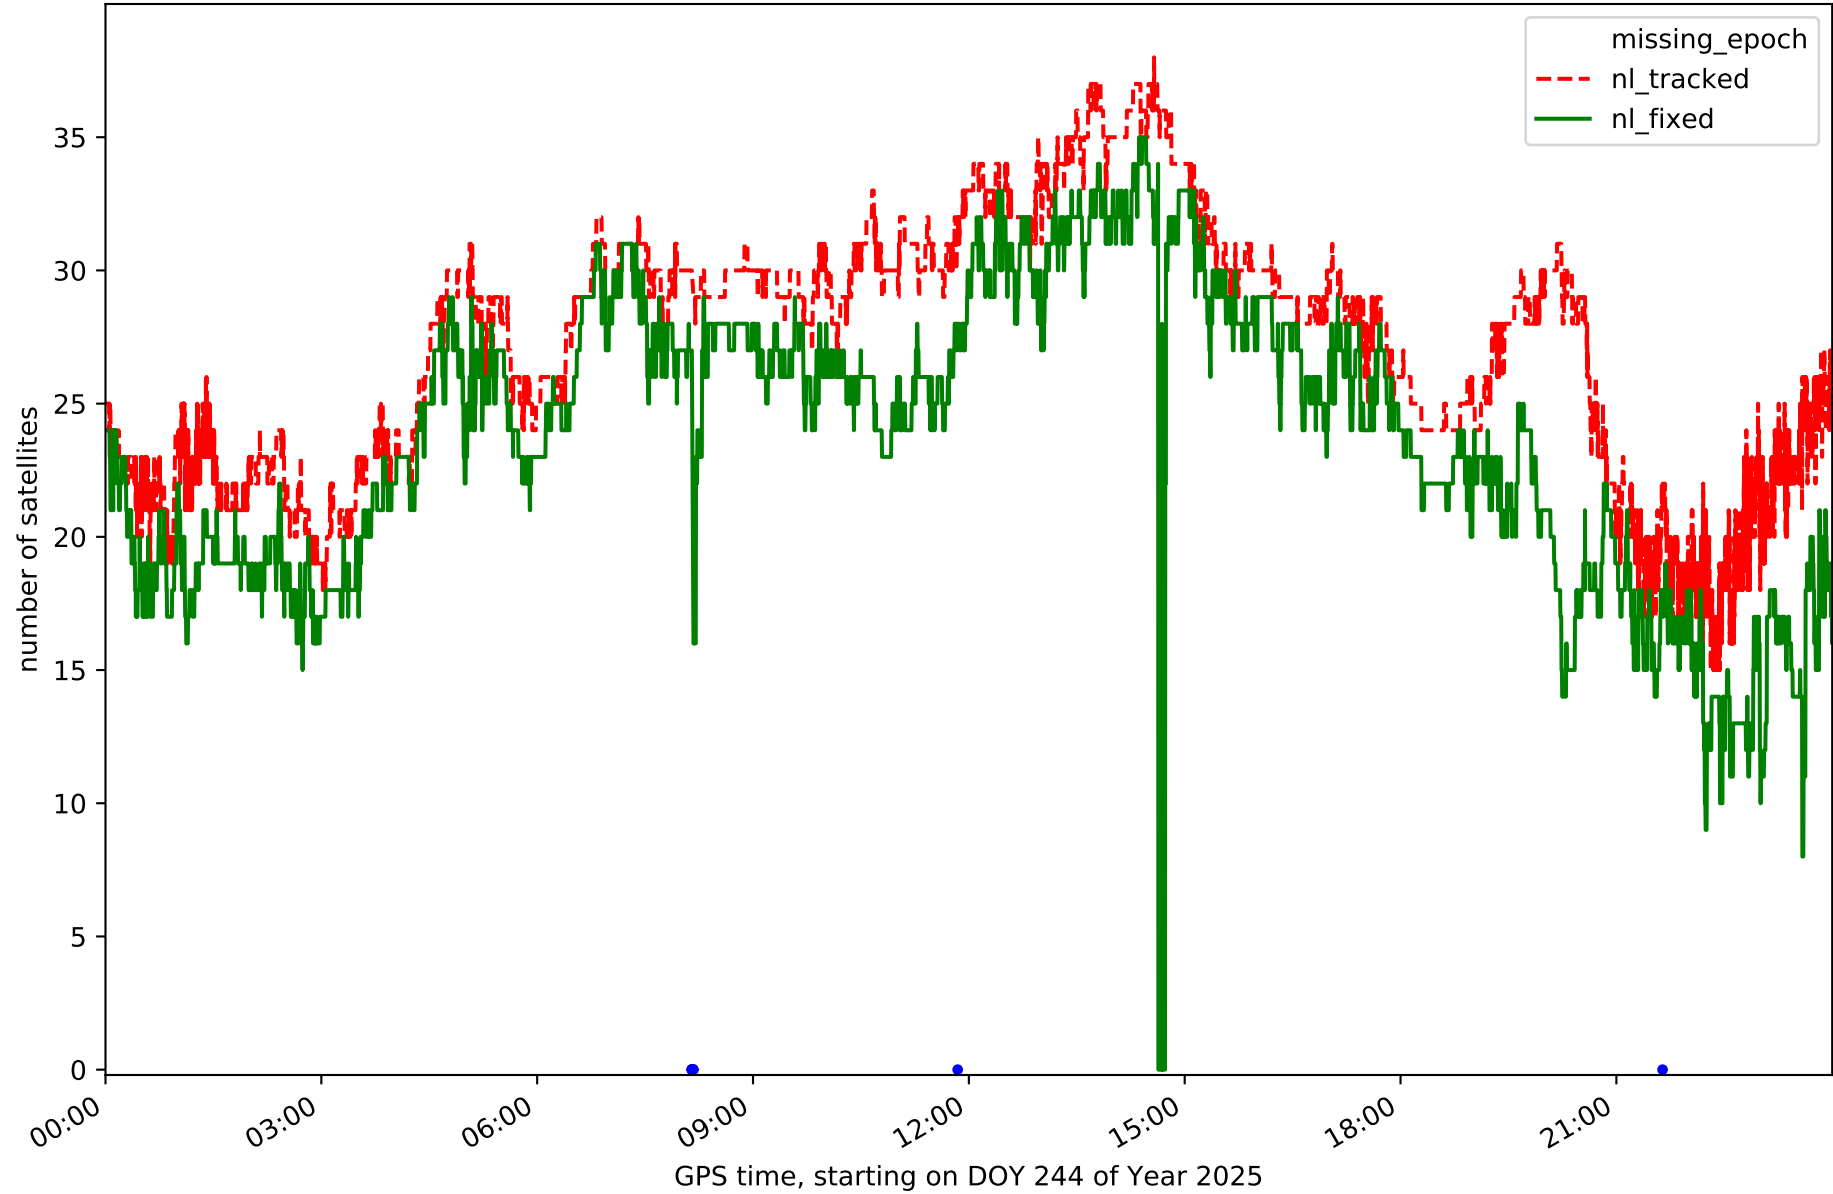


Station TN01 in network NT32

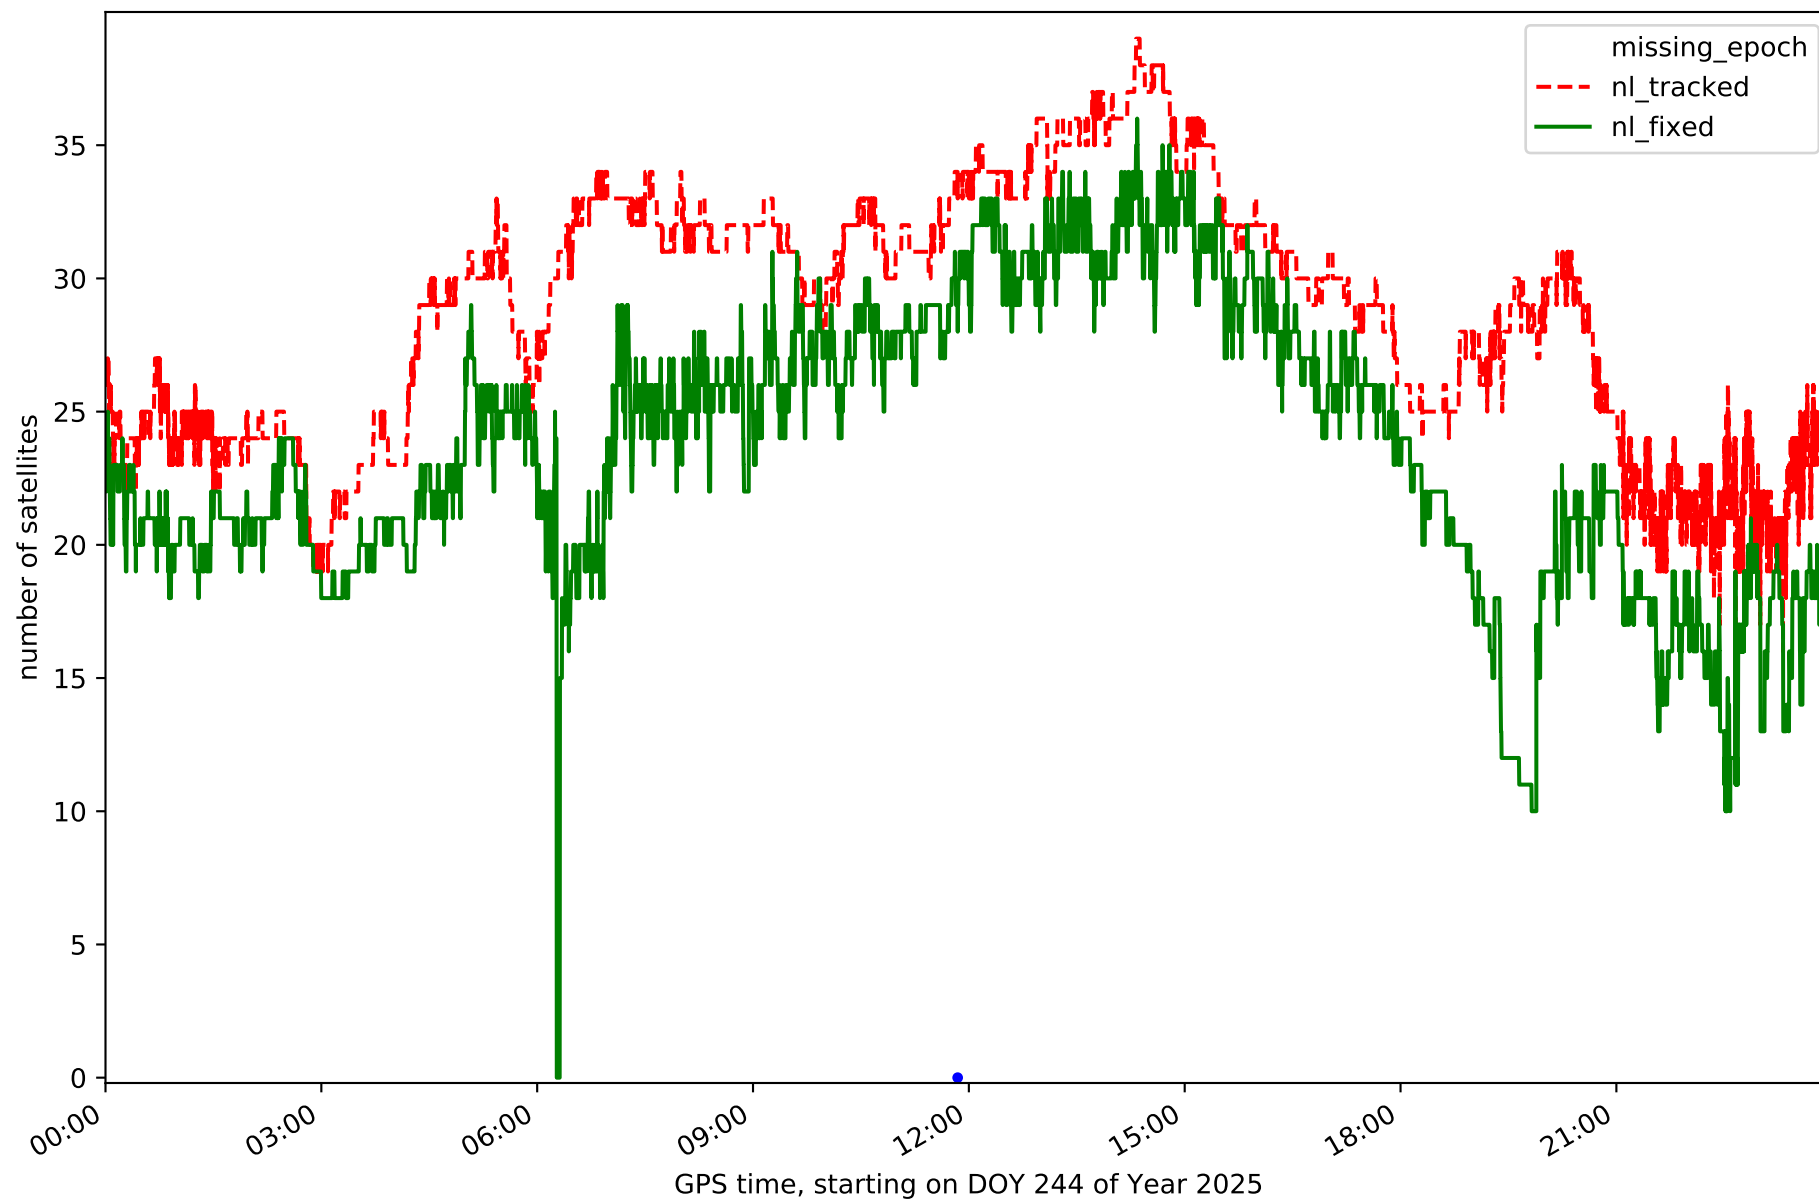


Station TN02 in network NT32

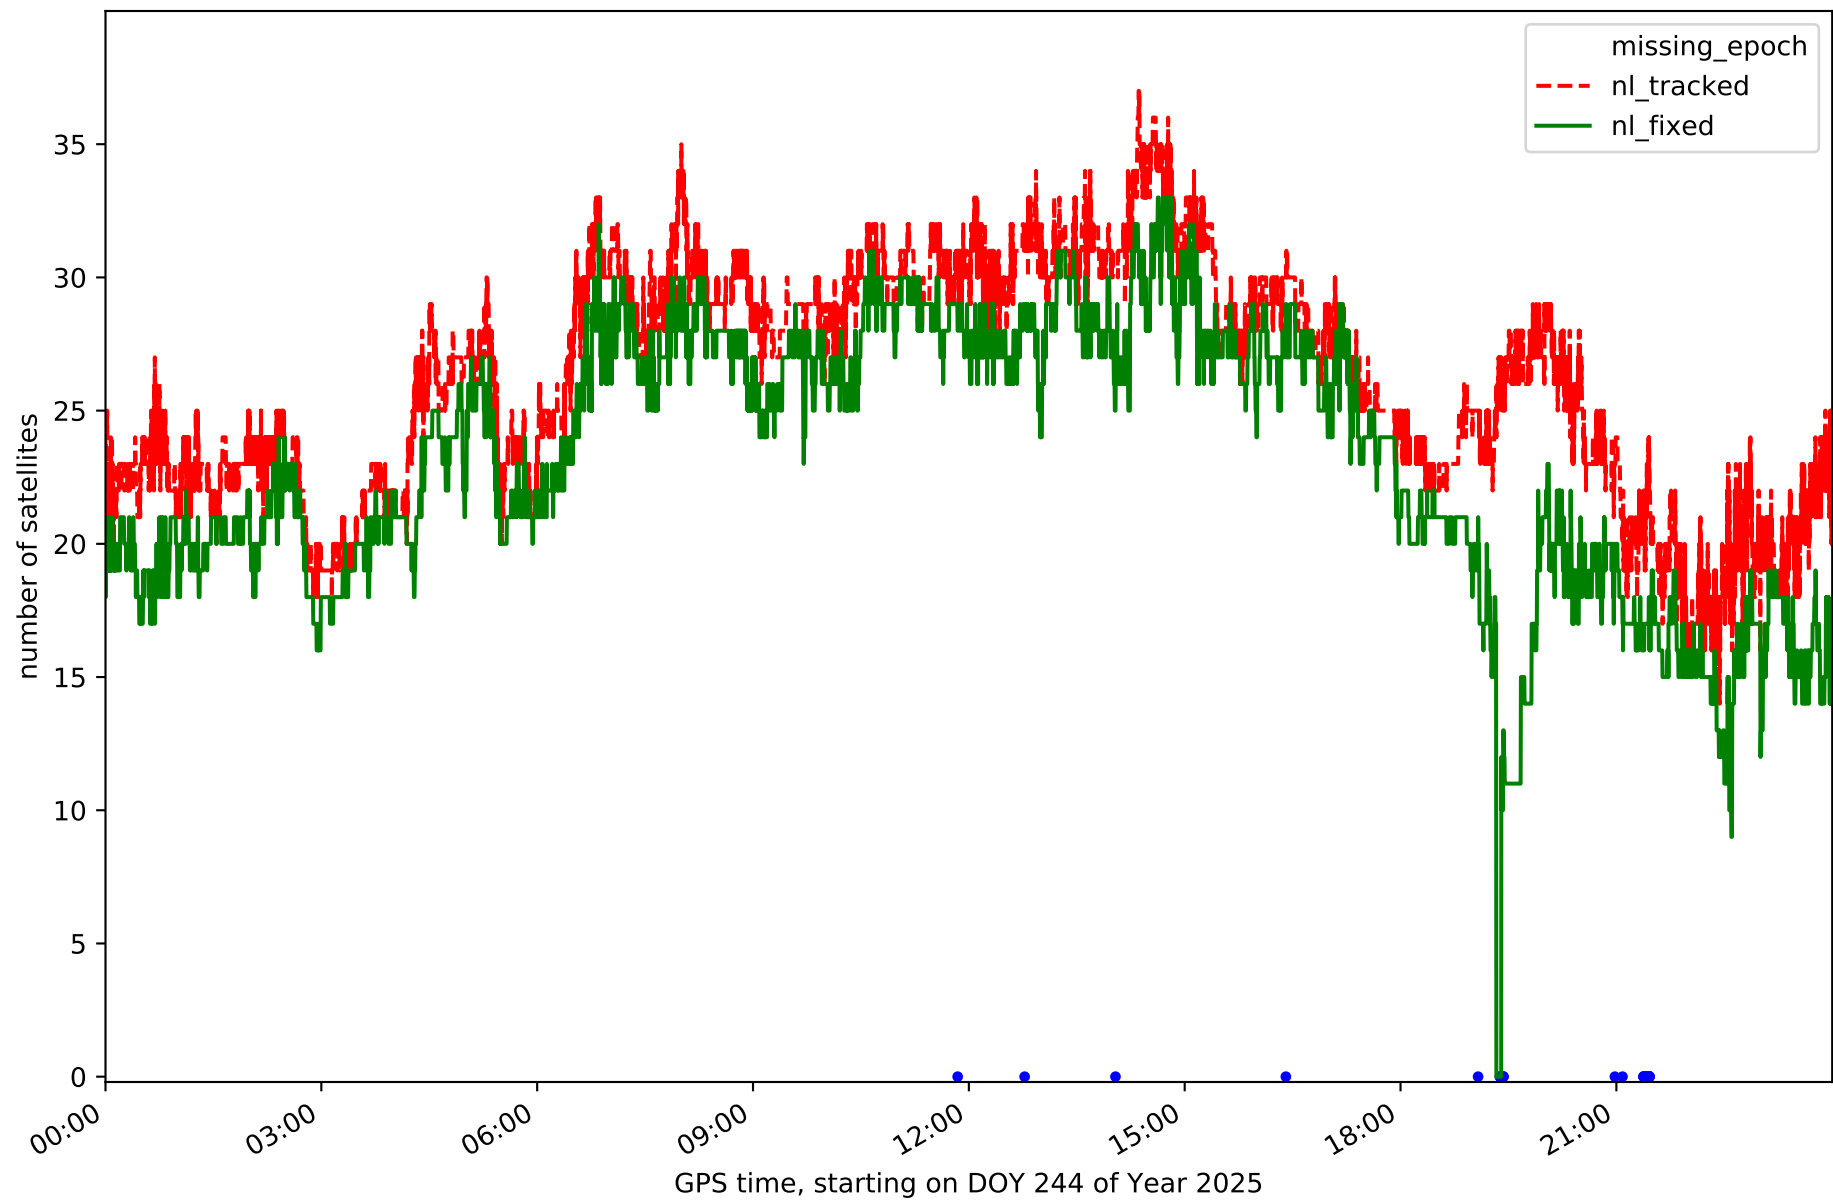


Station TN03 in network NT32

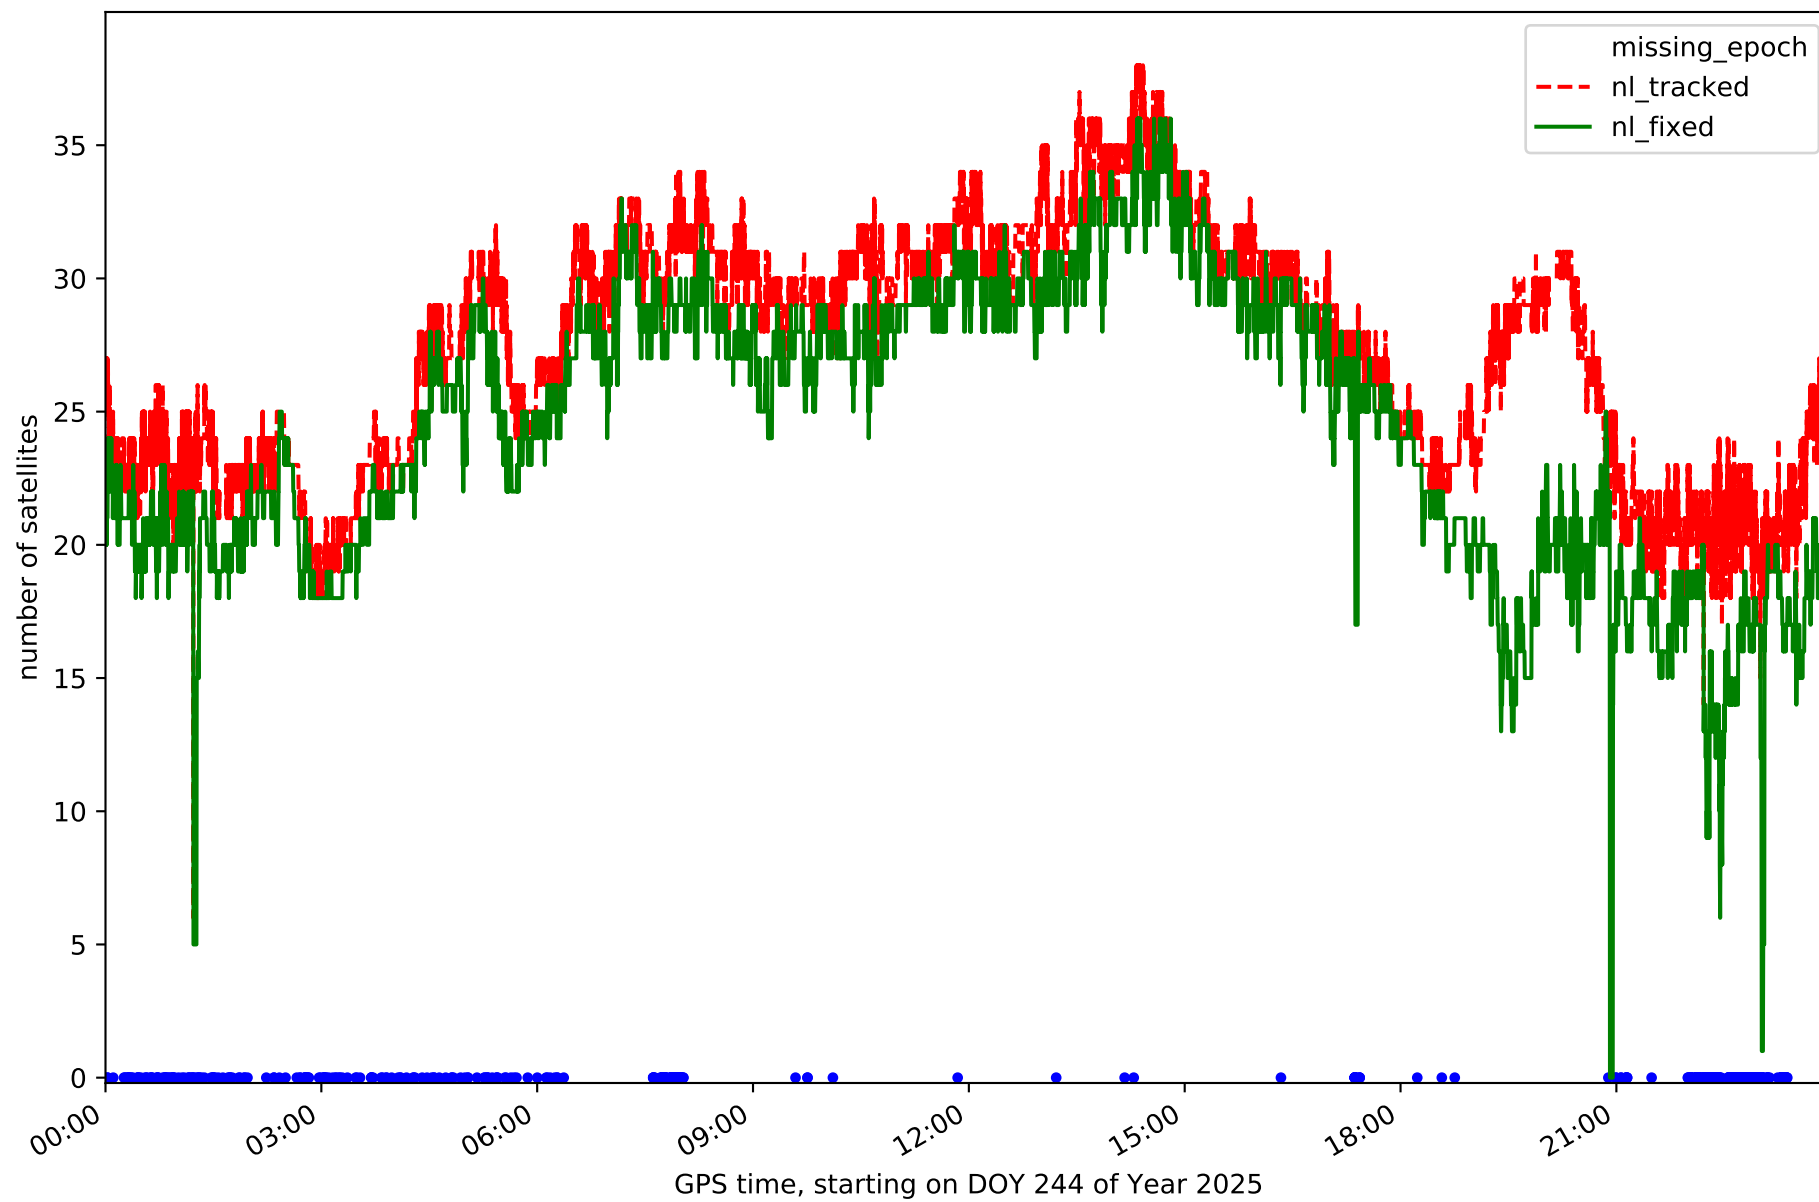


Station TN04 in network NT32

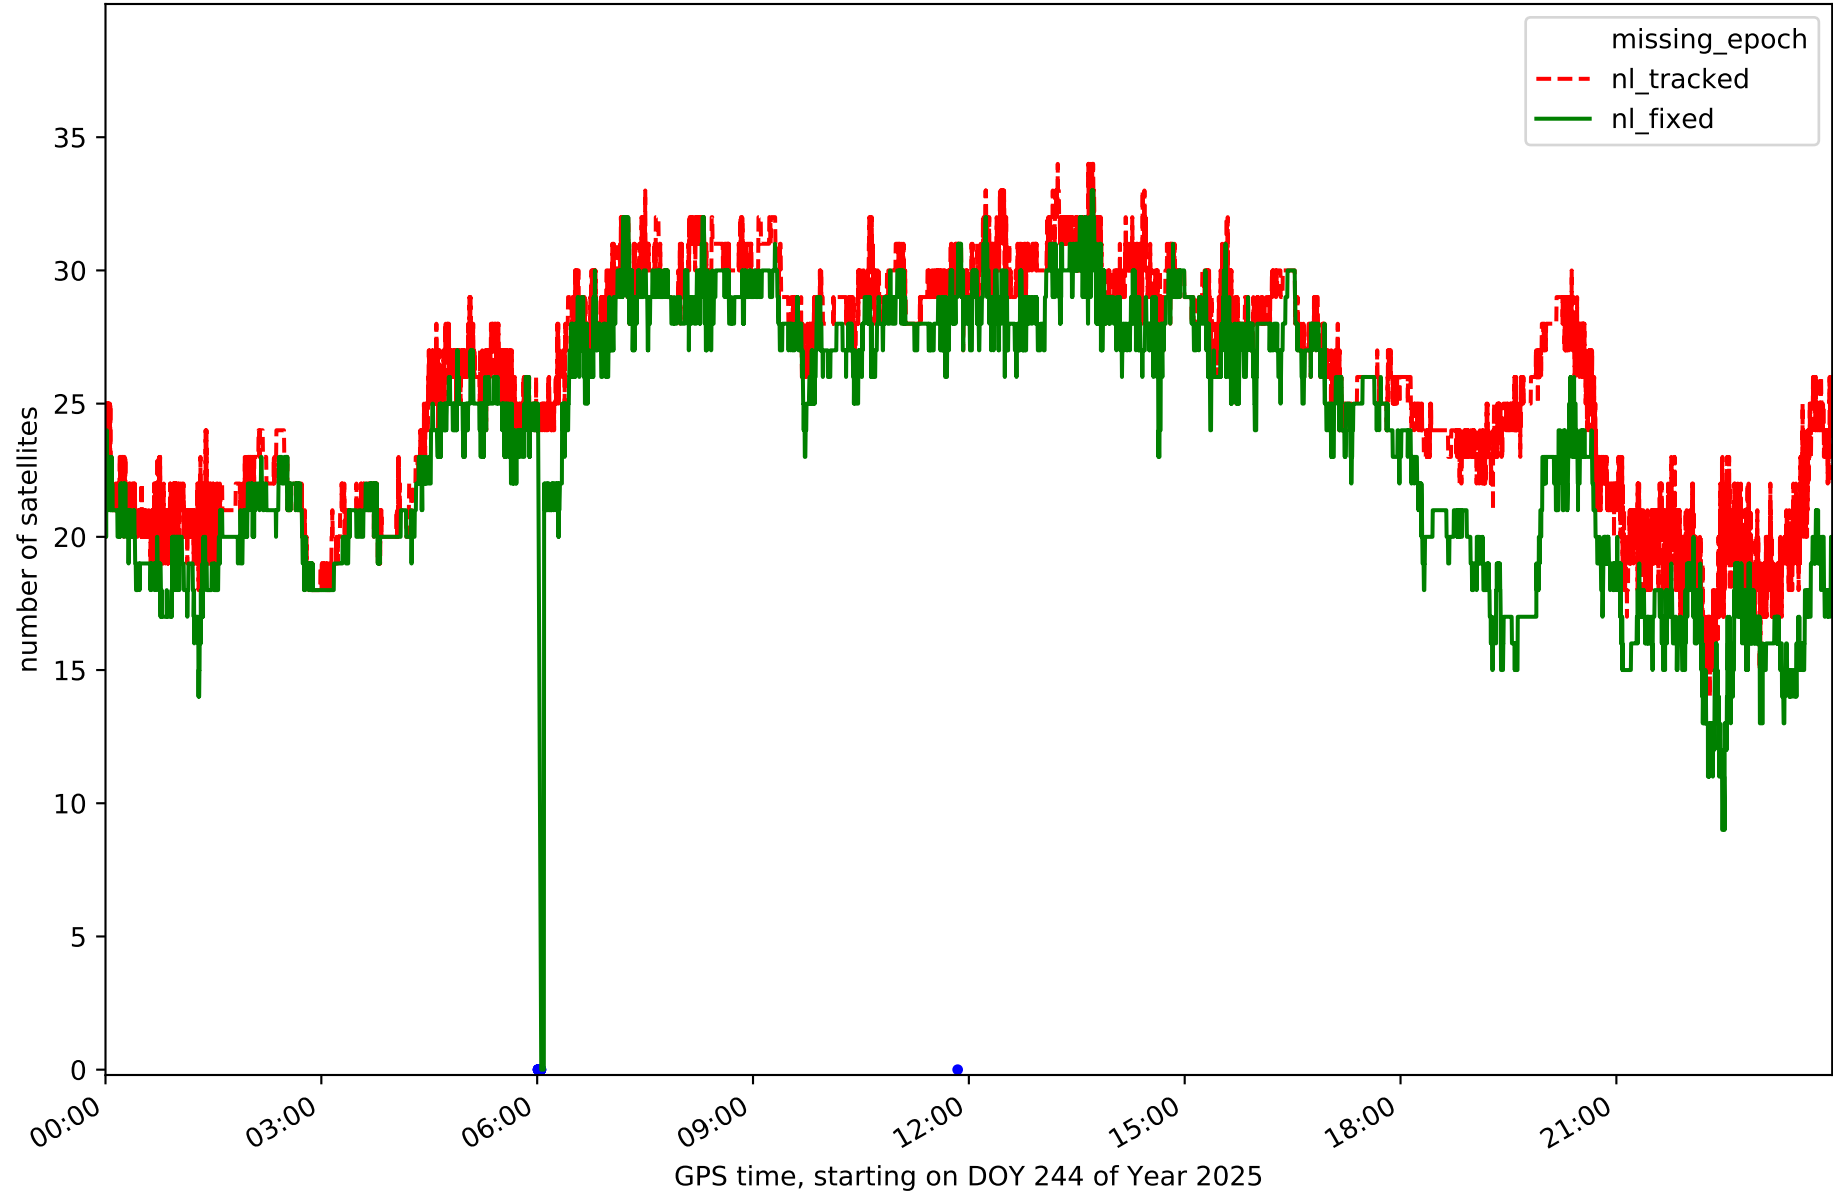


Station TN06 in network NT32

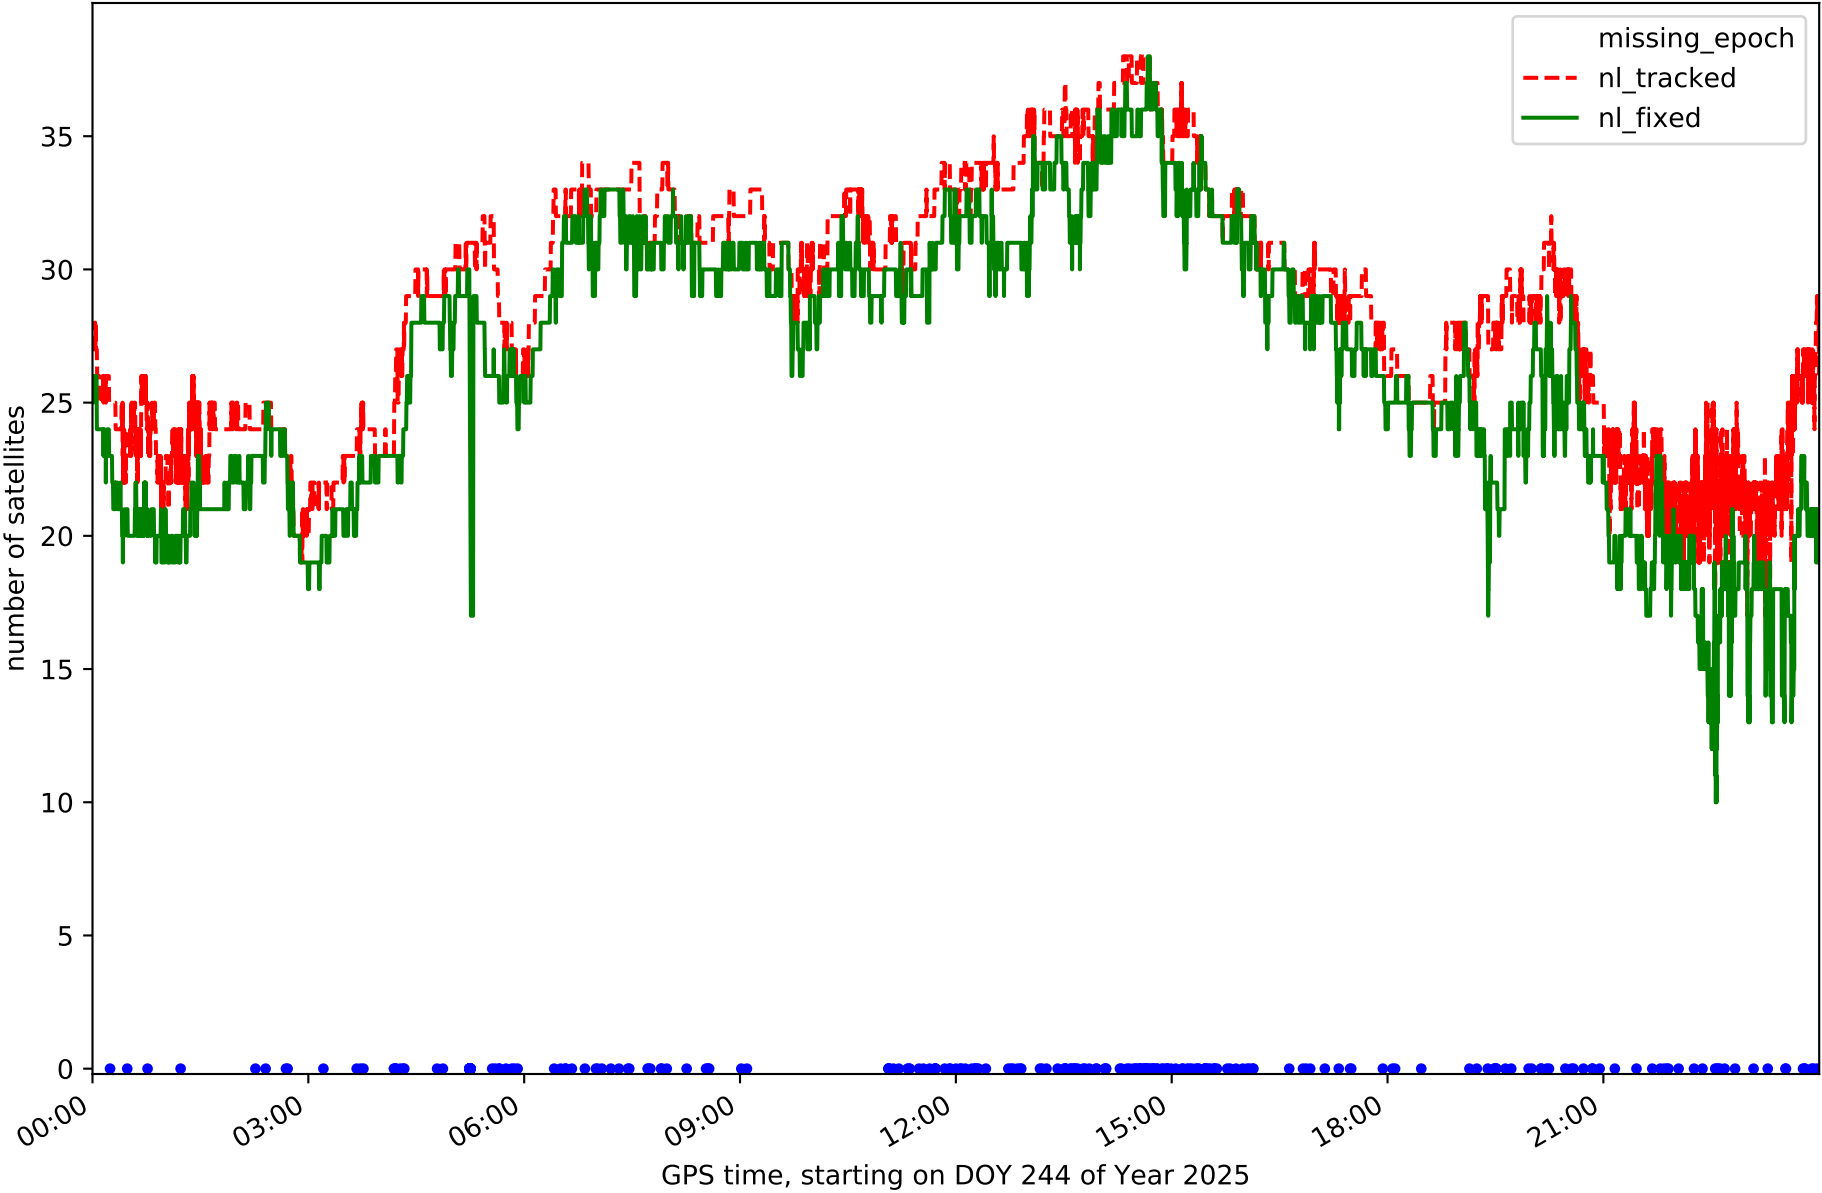


Station TN09 in network NT32

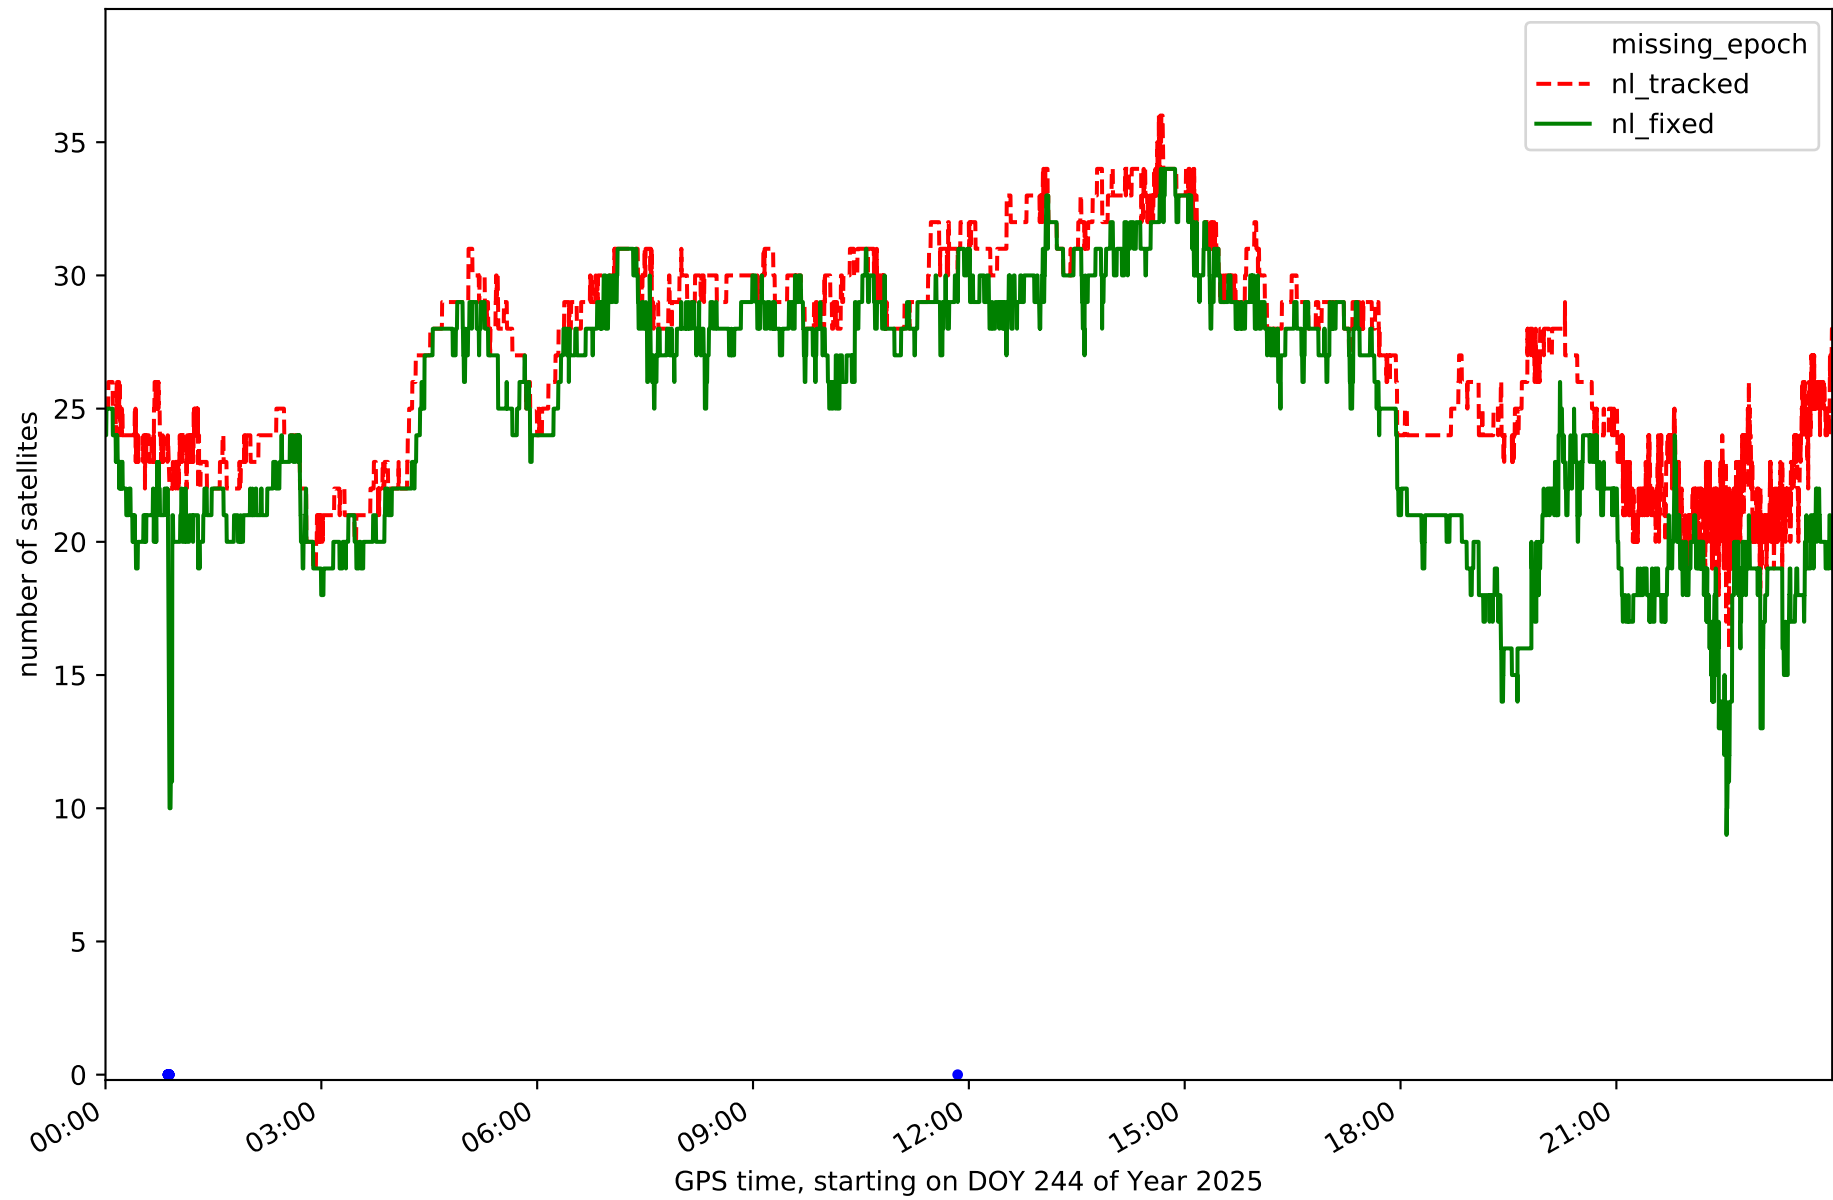


Station TE11 in network NT32

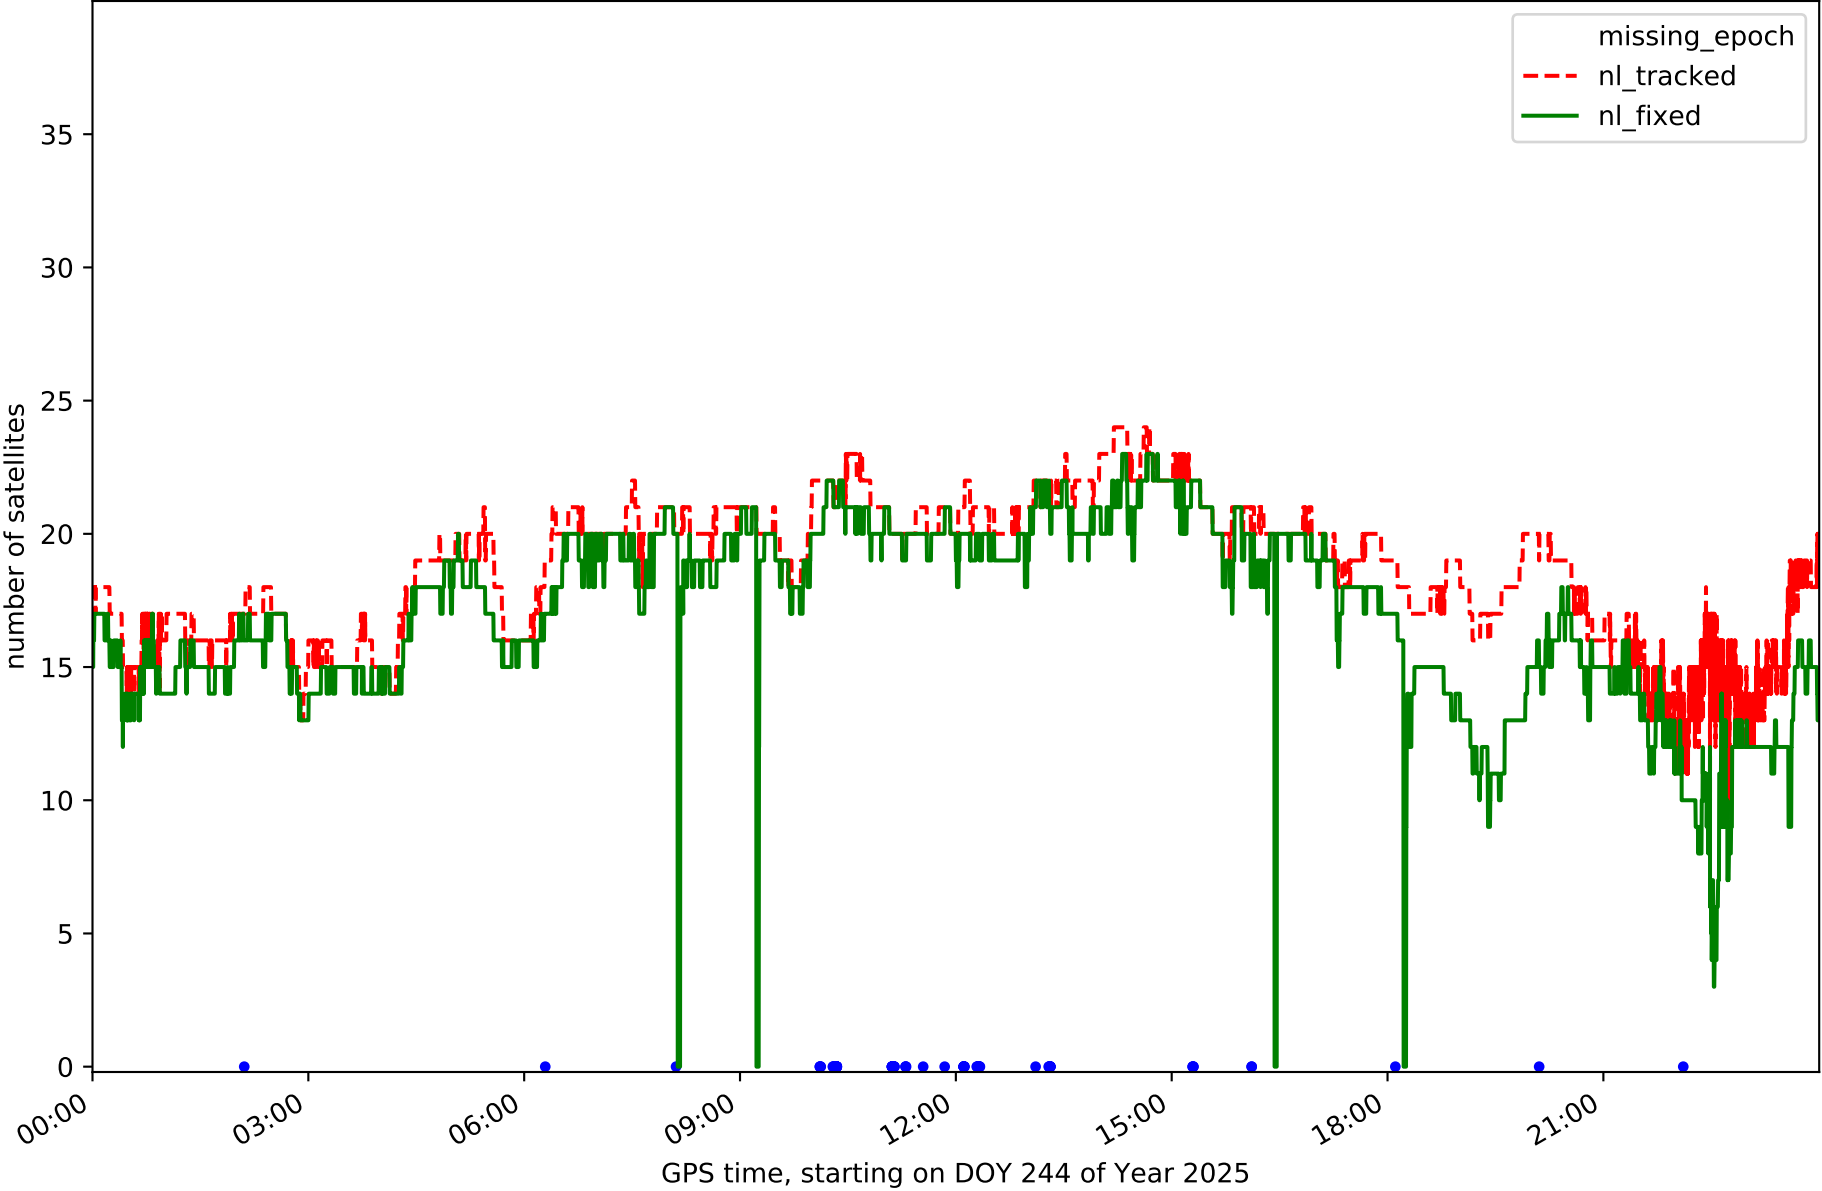


RefCheck for station EH01 in network NT32

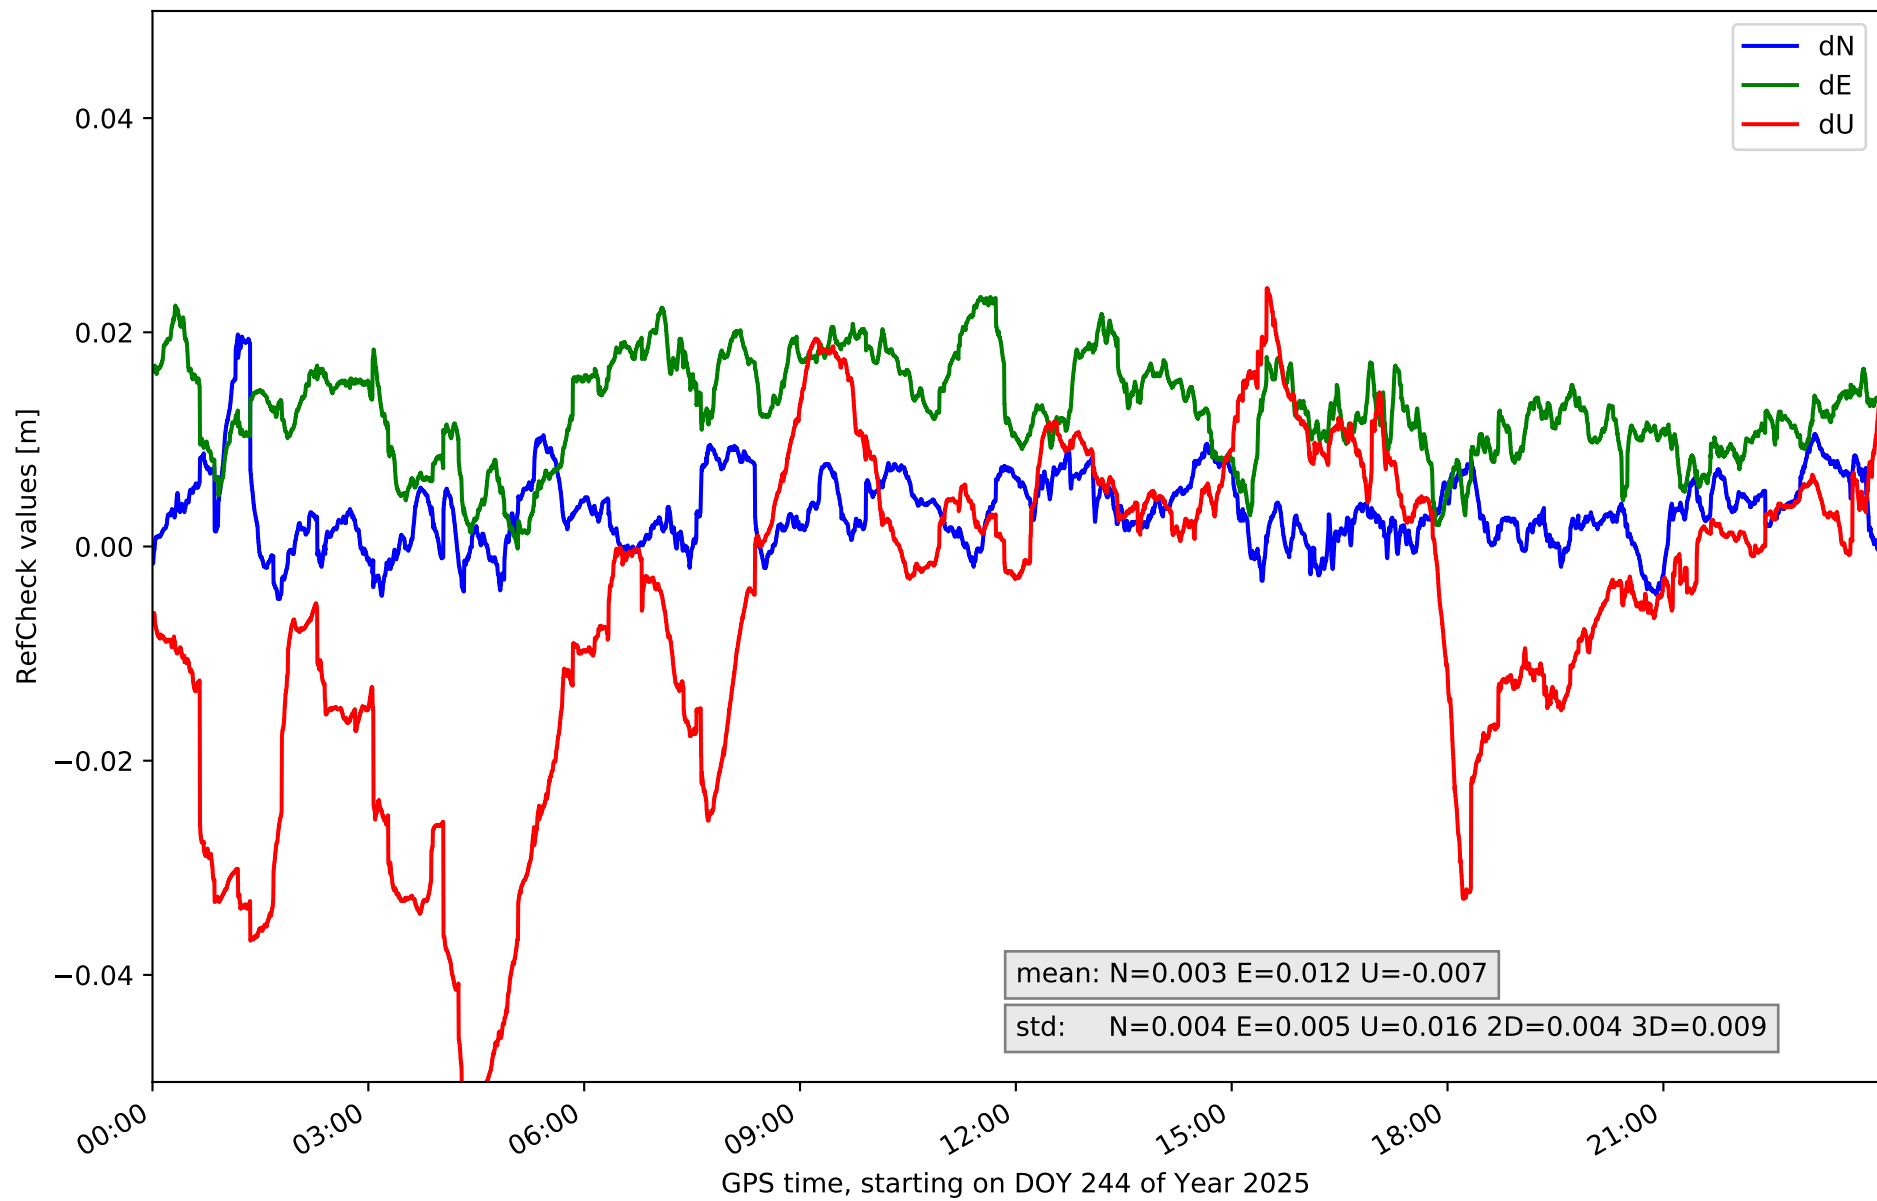


RefCheck for station EH02 in network NT32

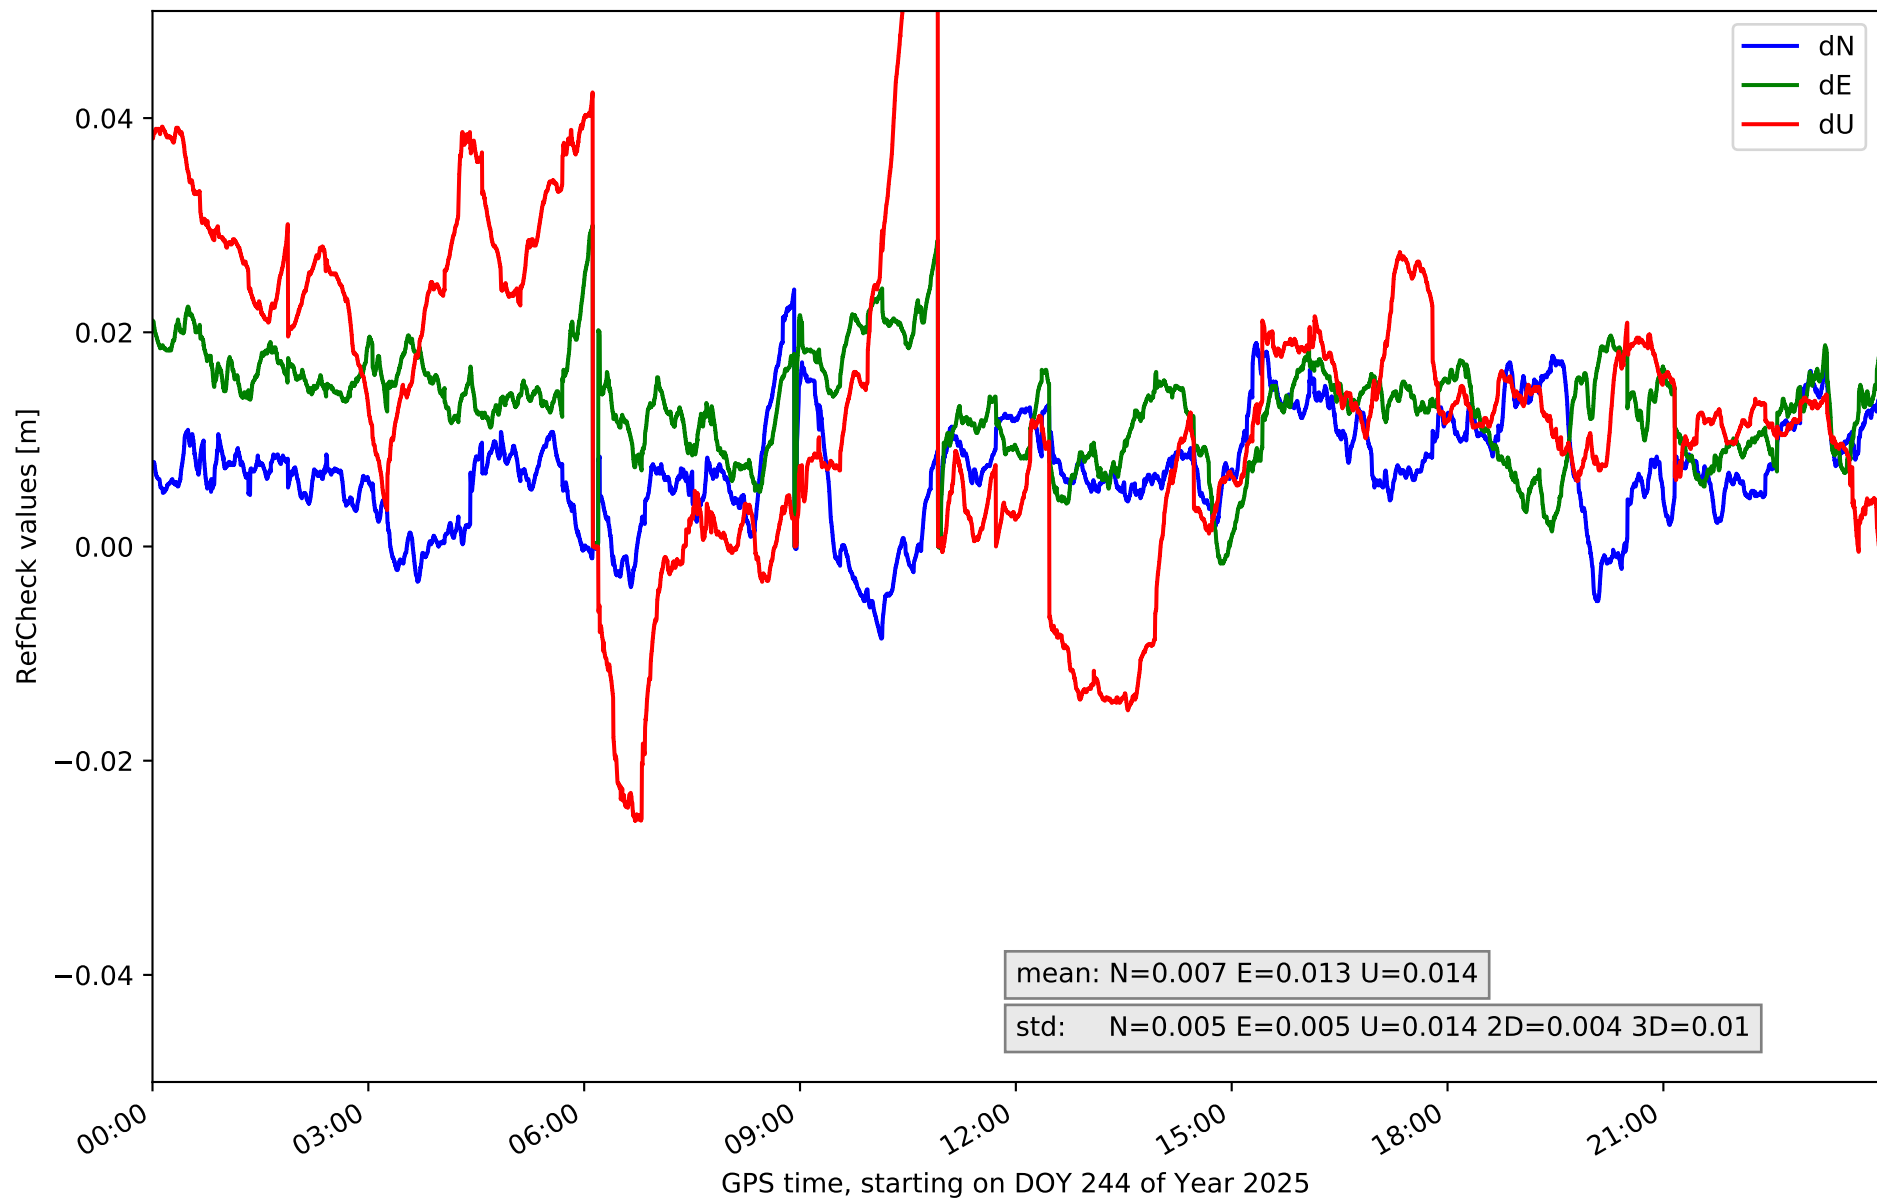


RefCheck for station GOM1 in network NT32

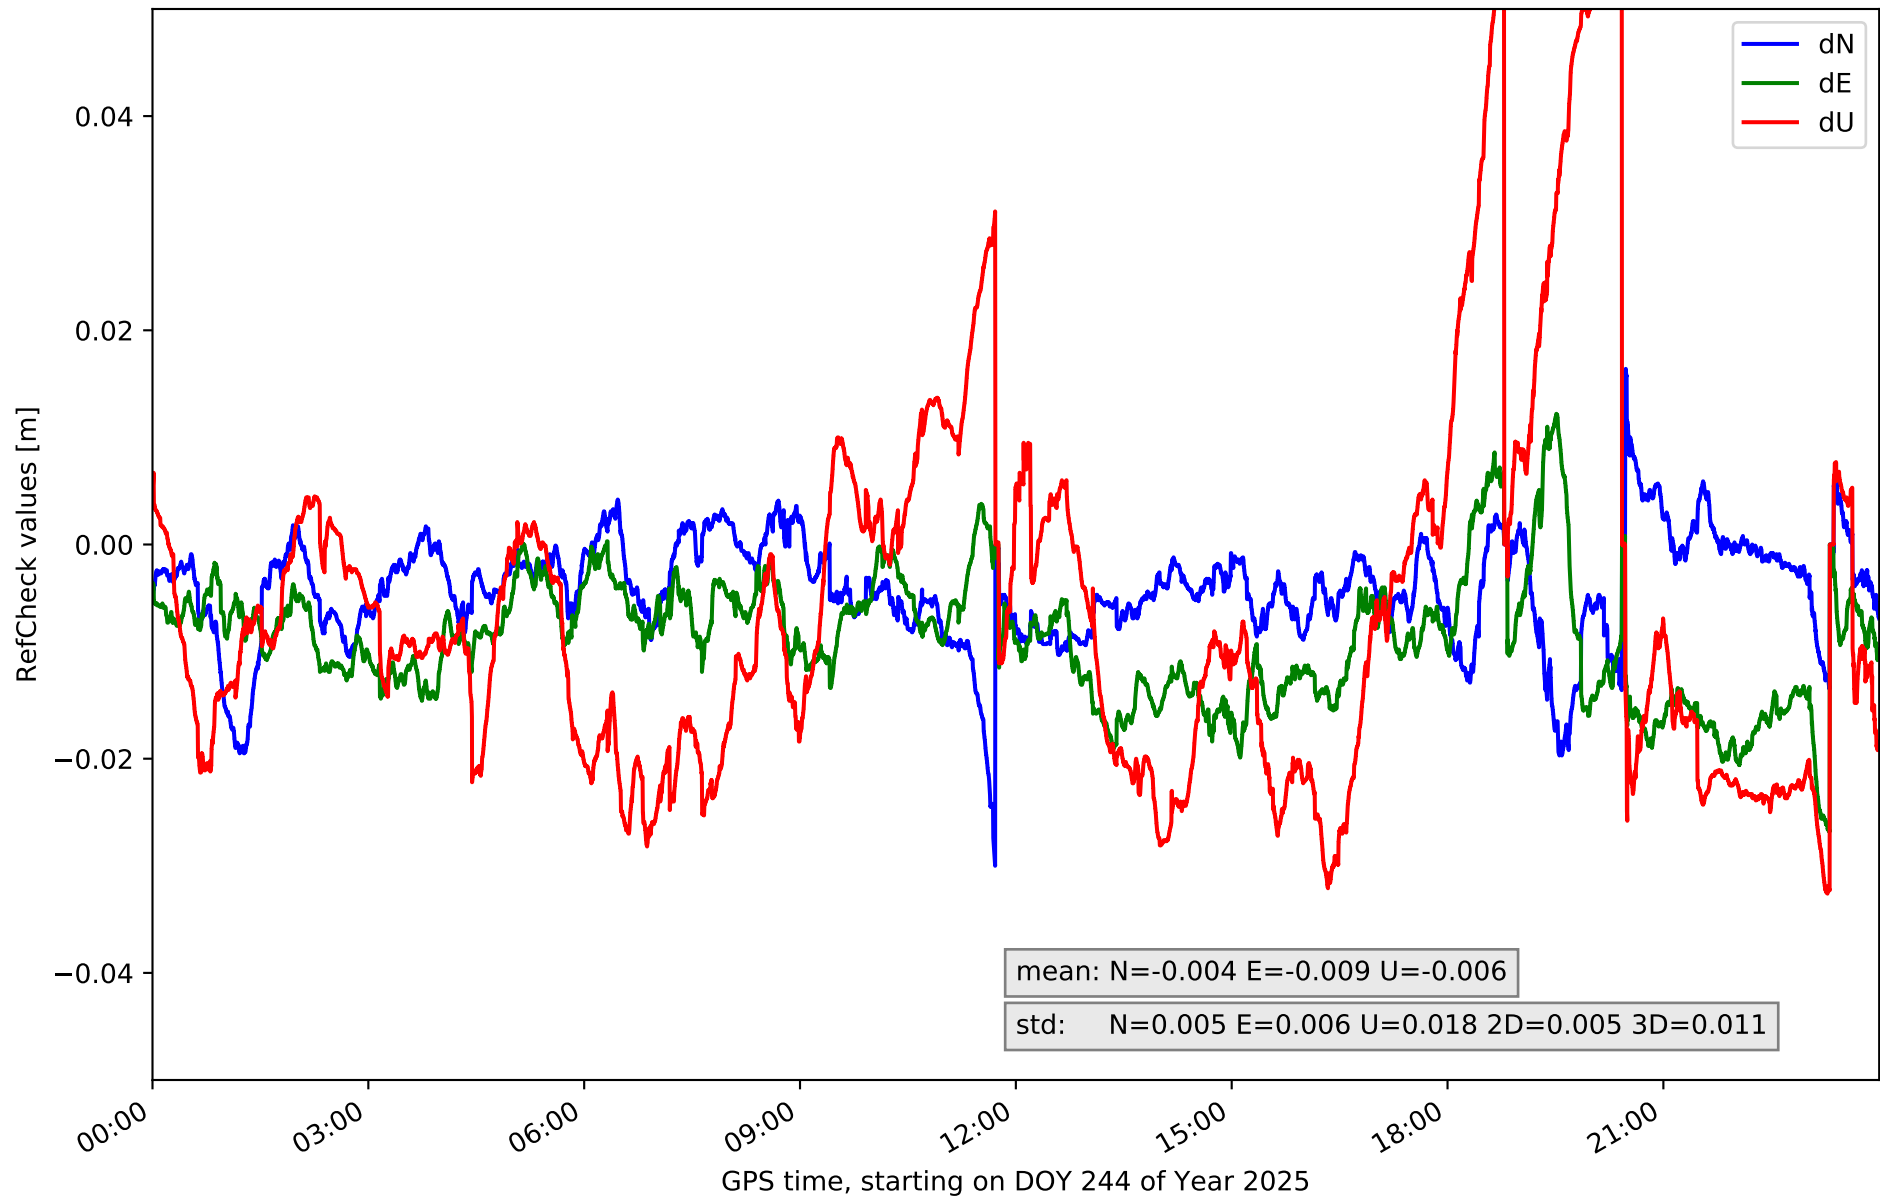


RefCheck for station IZAN in network NT32

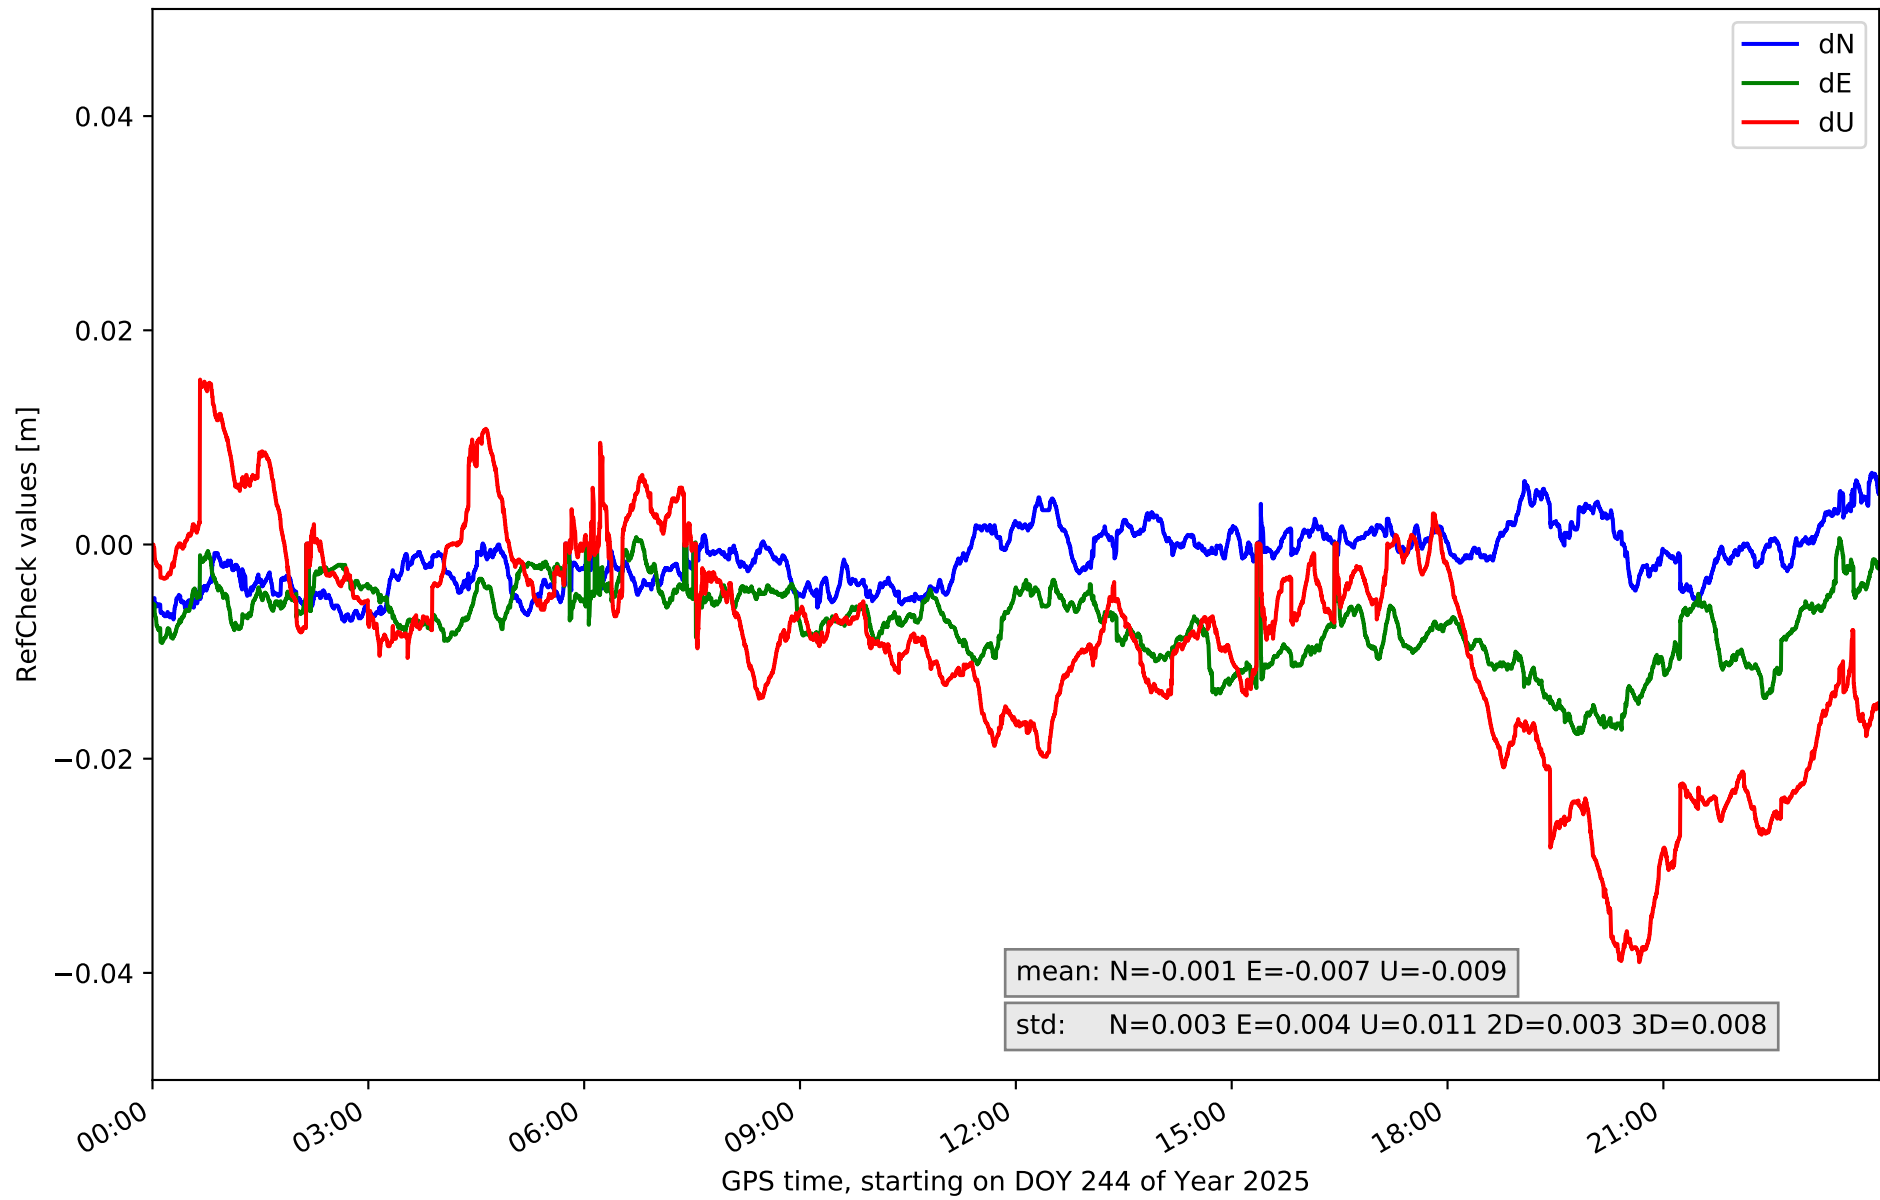


RefCheck for station LP01 in network NT32

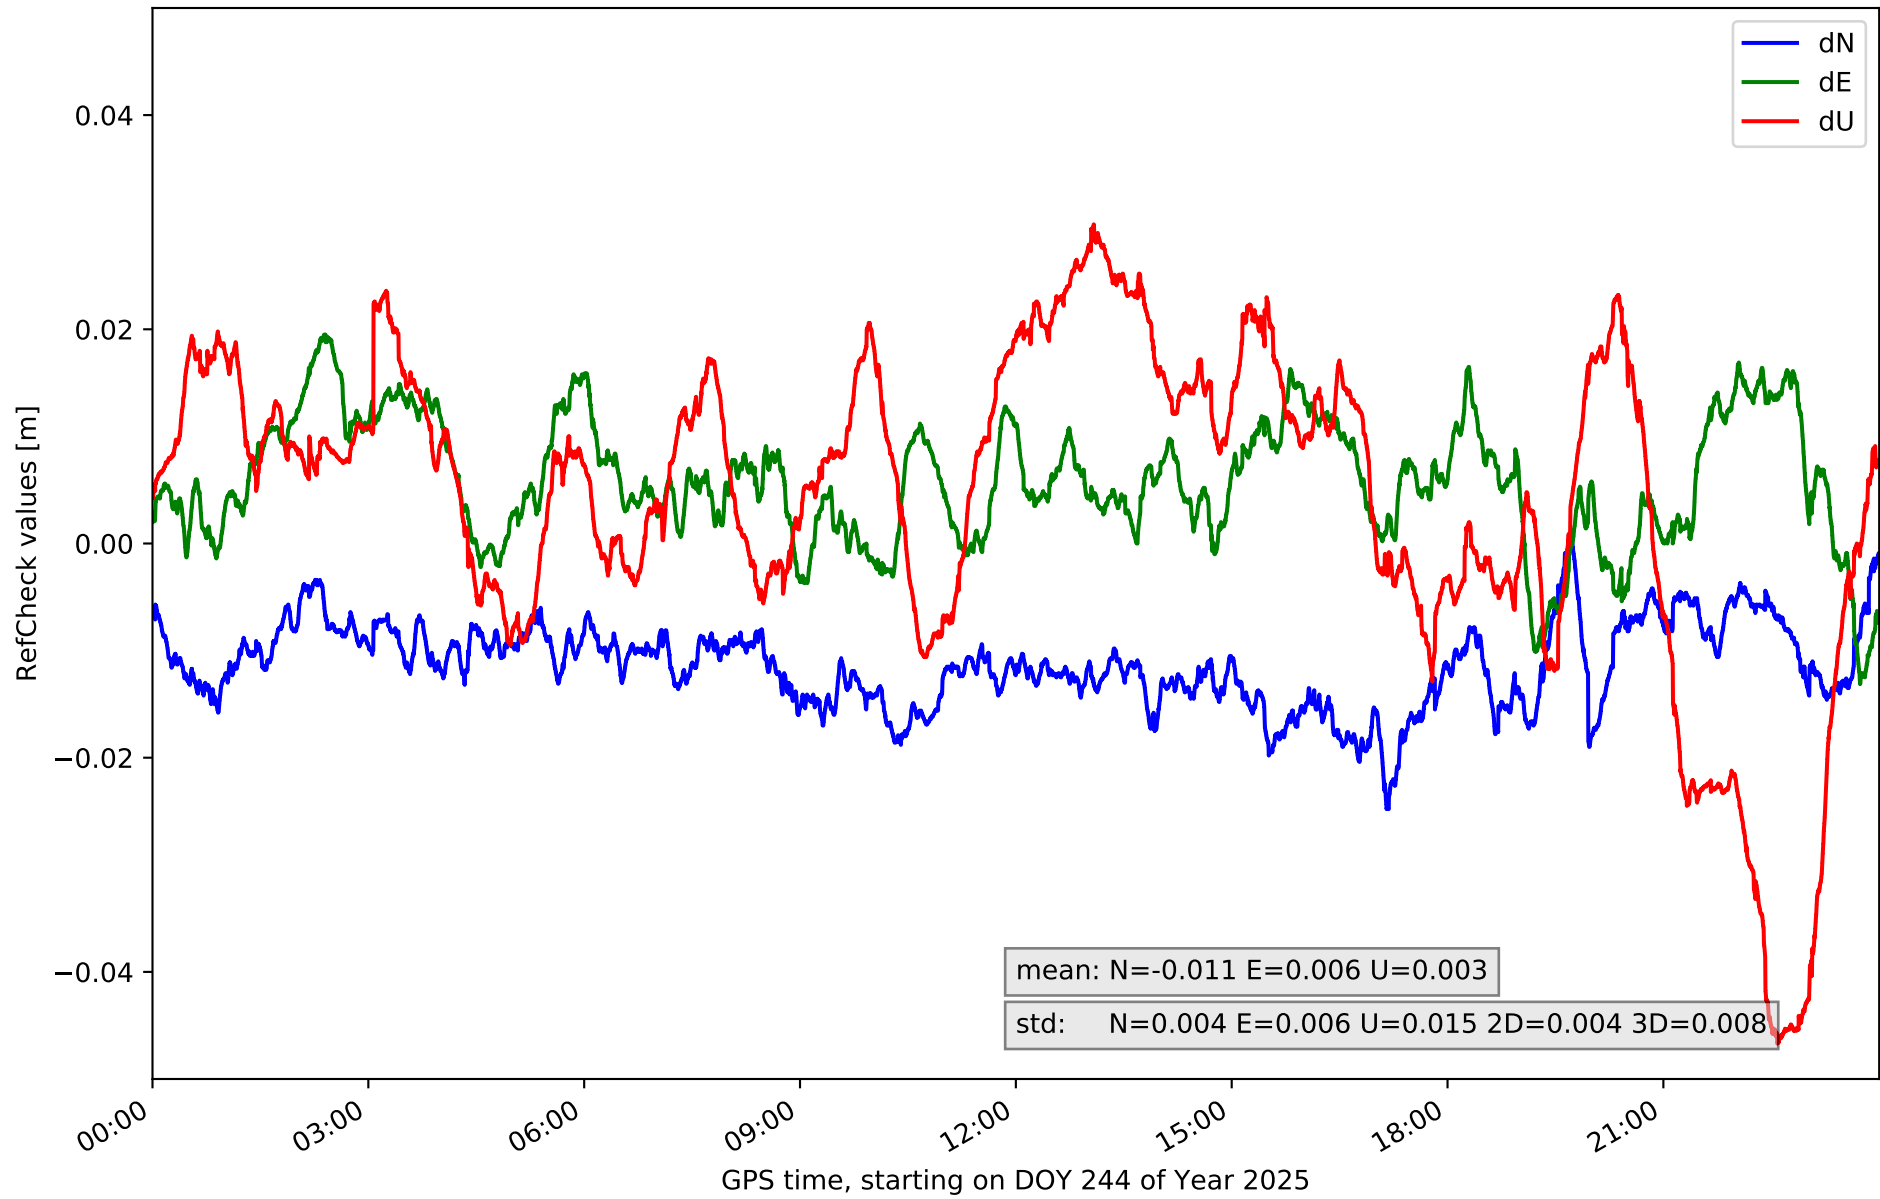


RefCheck for station LP03 in network NT32

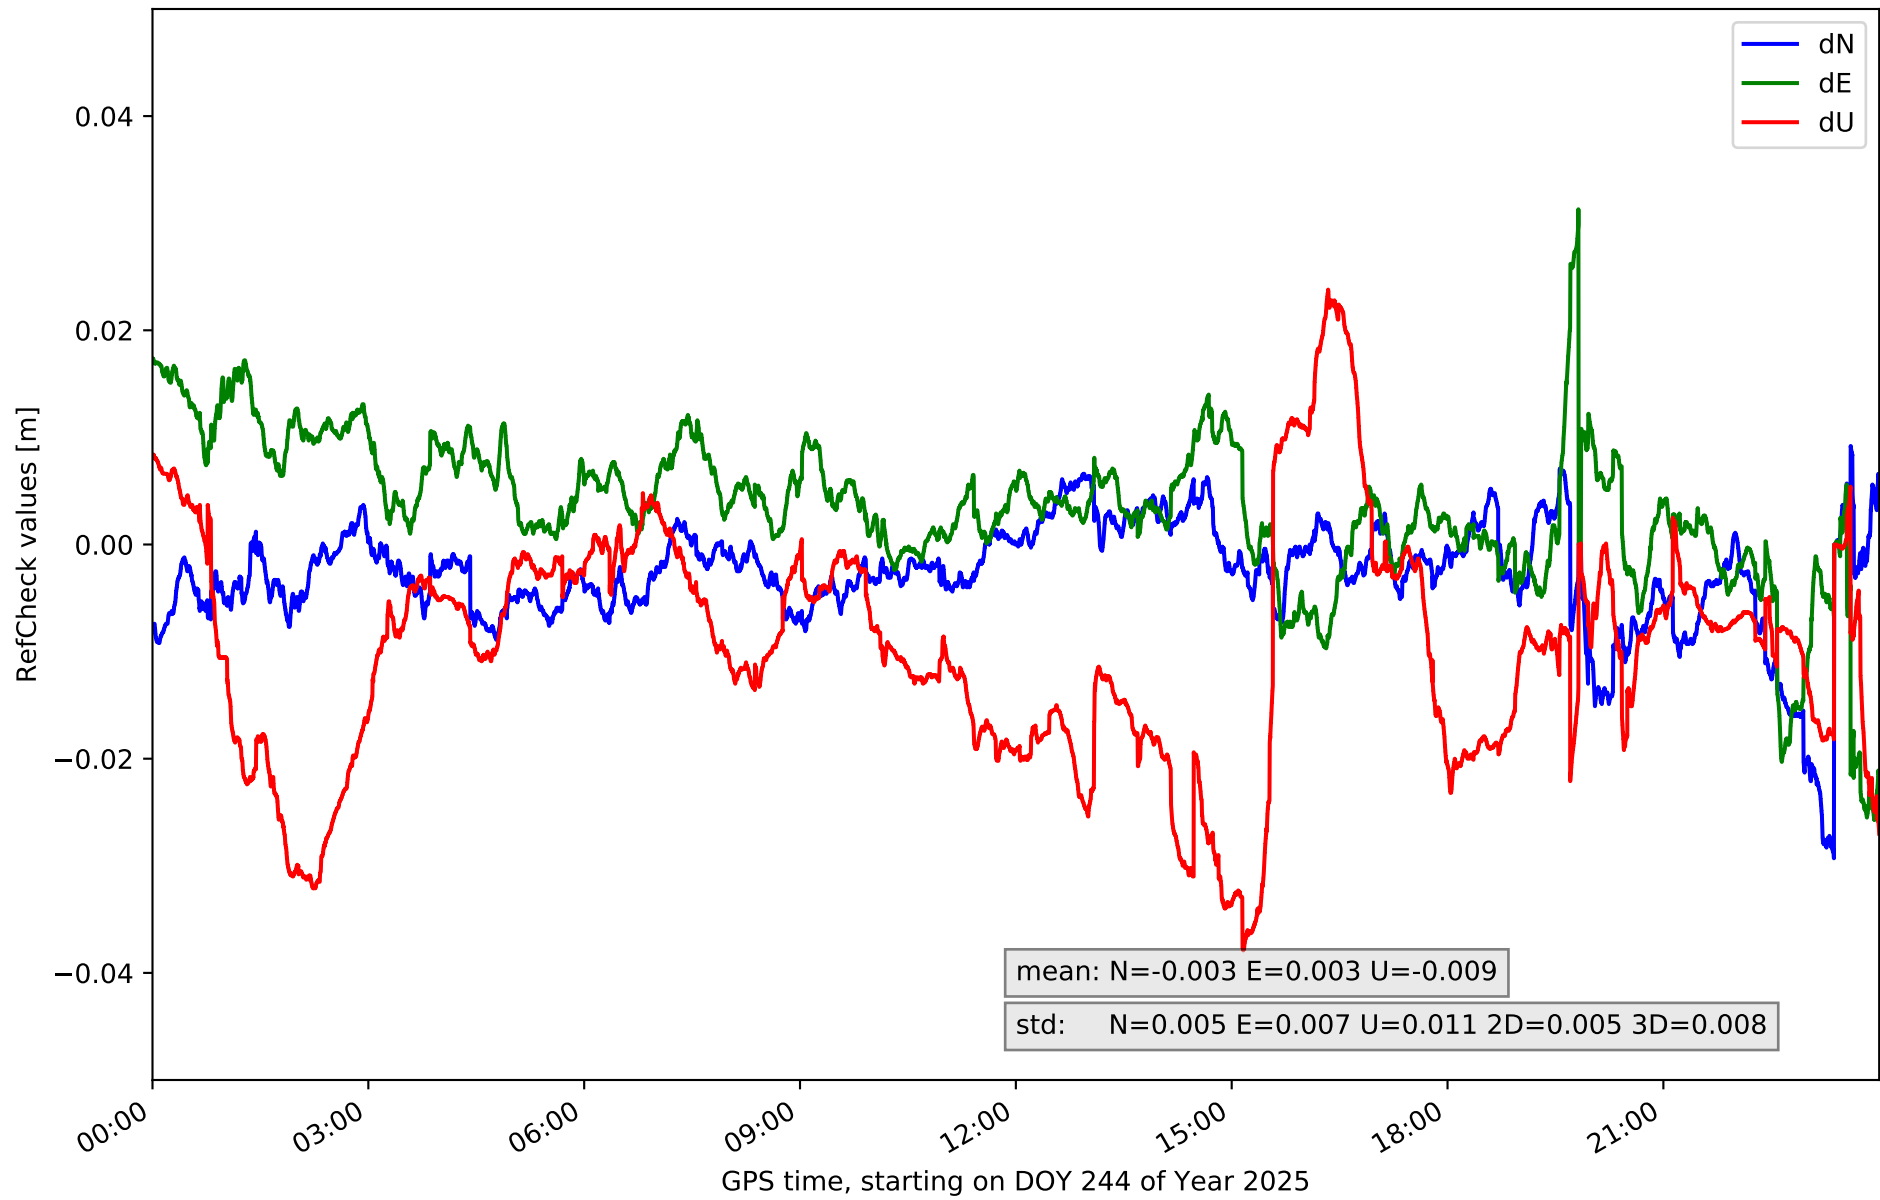


RefCheck for station LPAL in network NT32

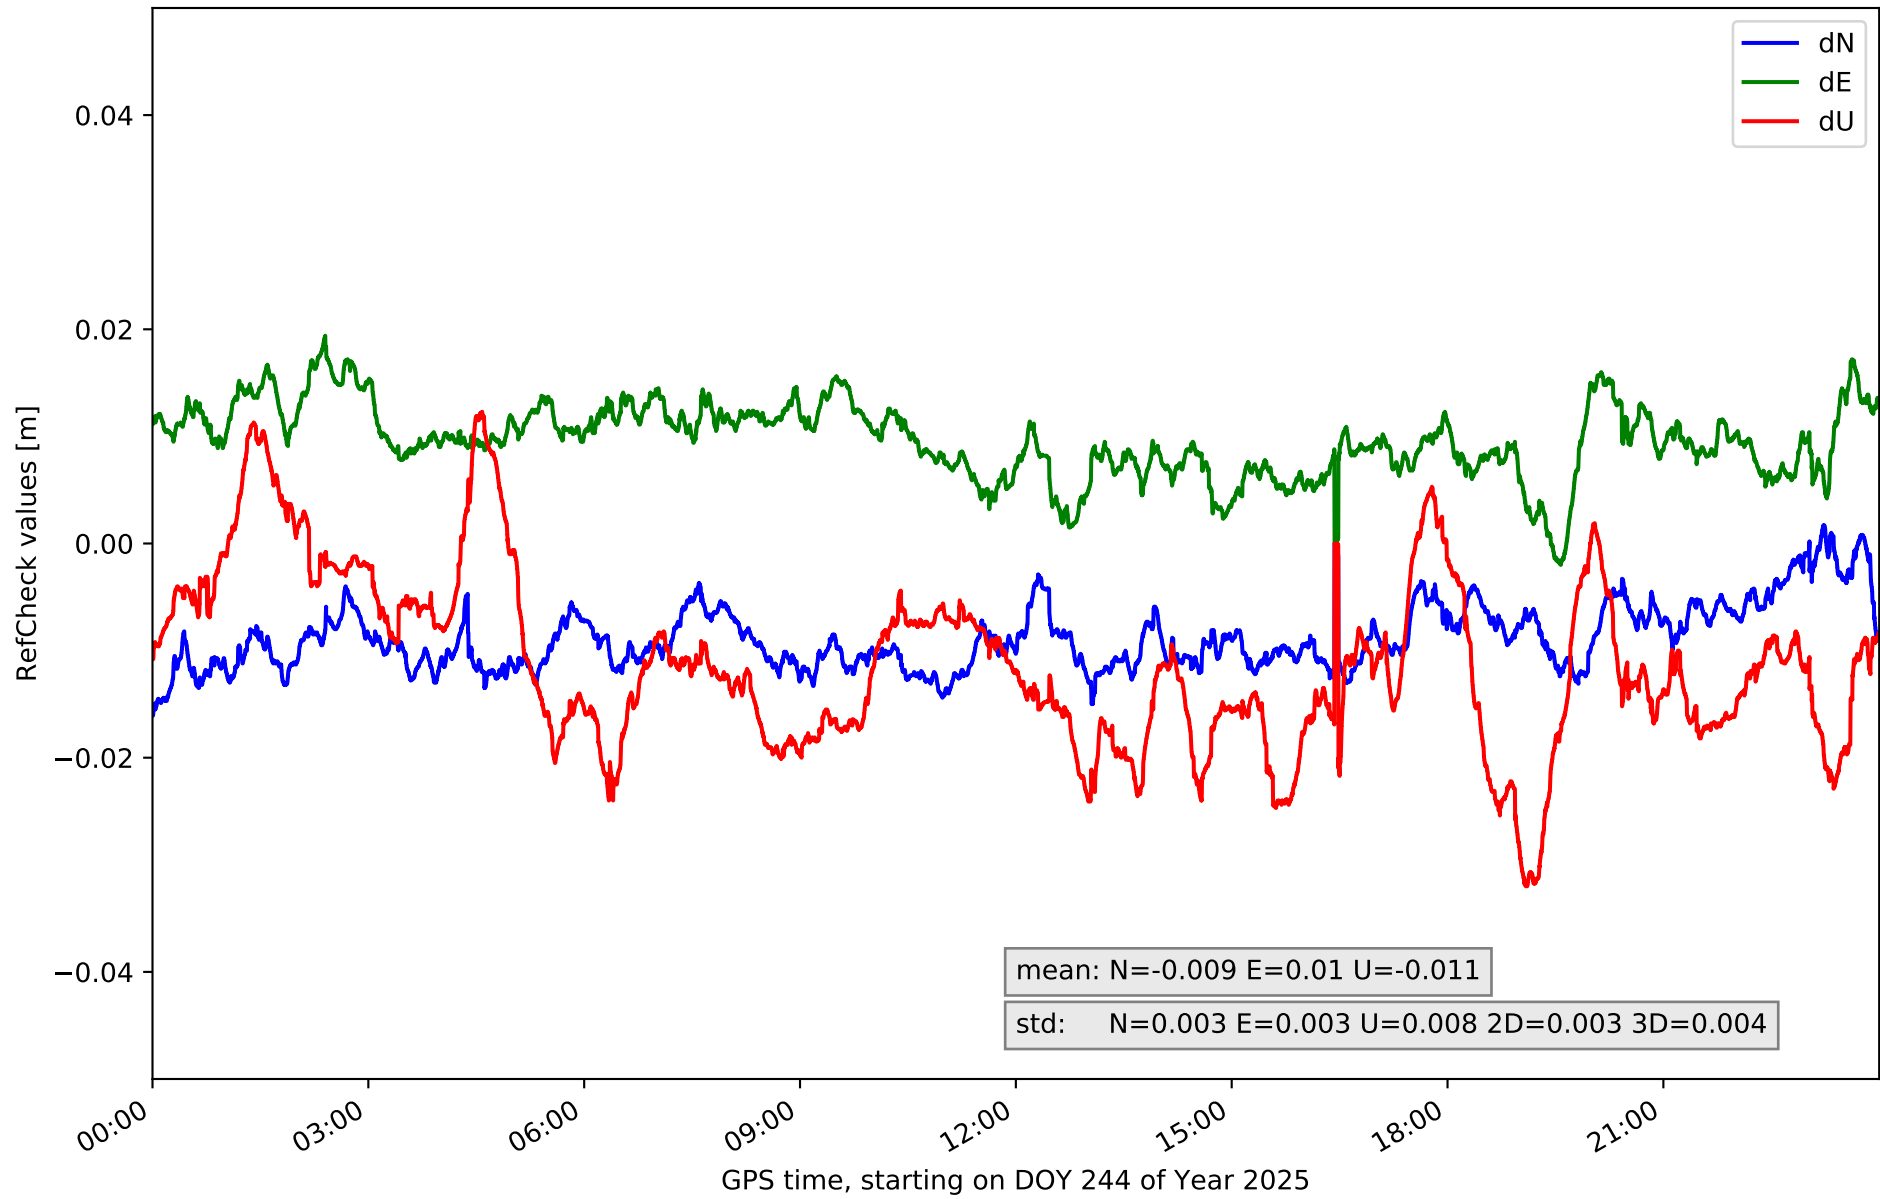


RefCheck for station LRES in network NT32

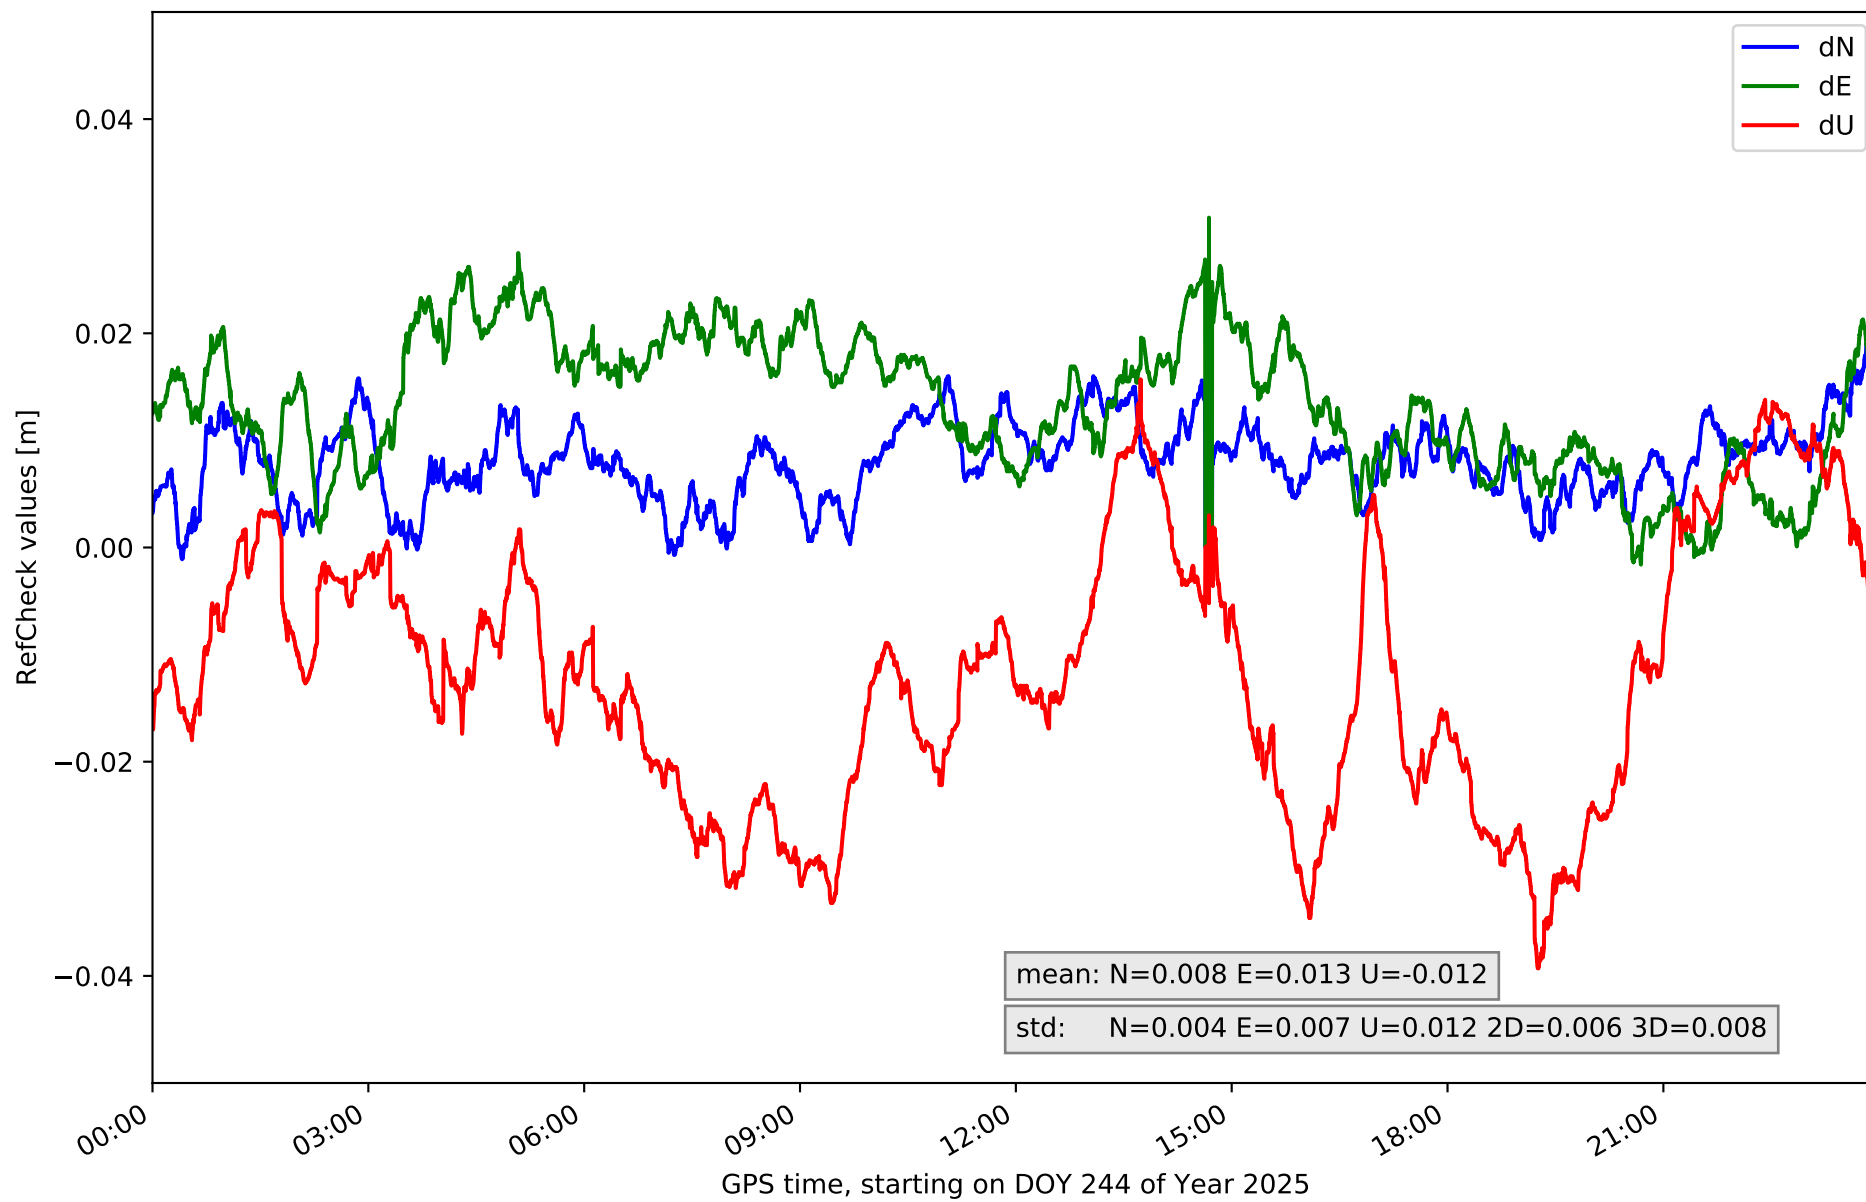


RefCheck for station TN01 in network NT32

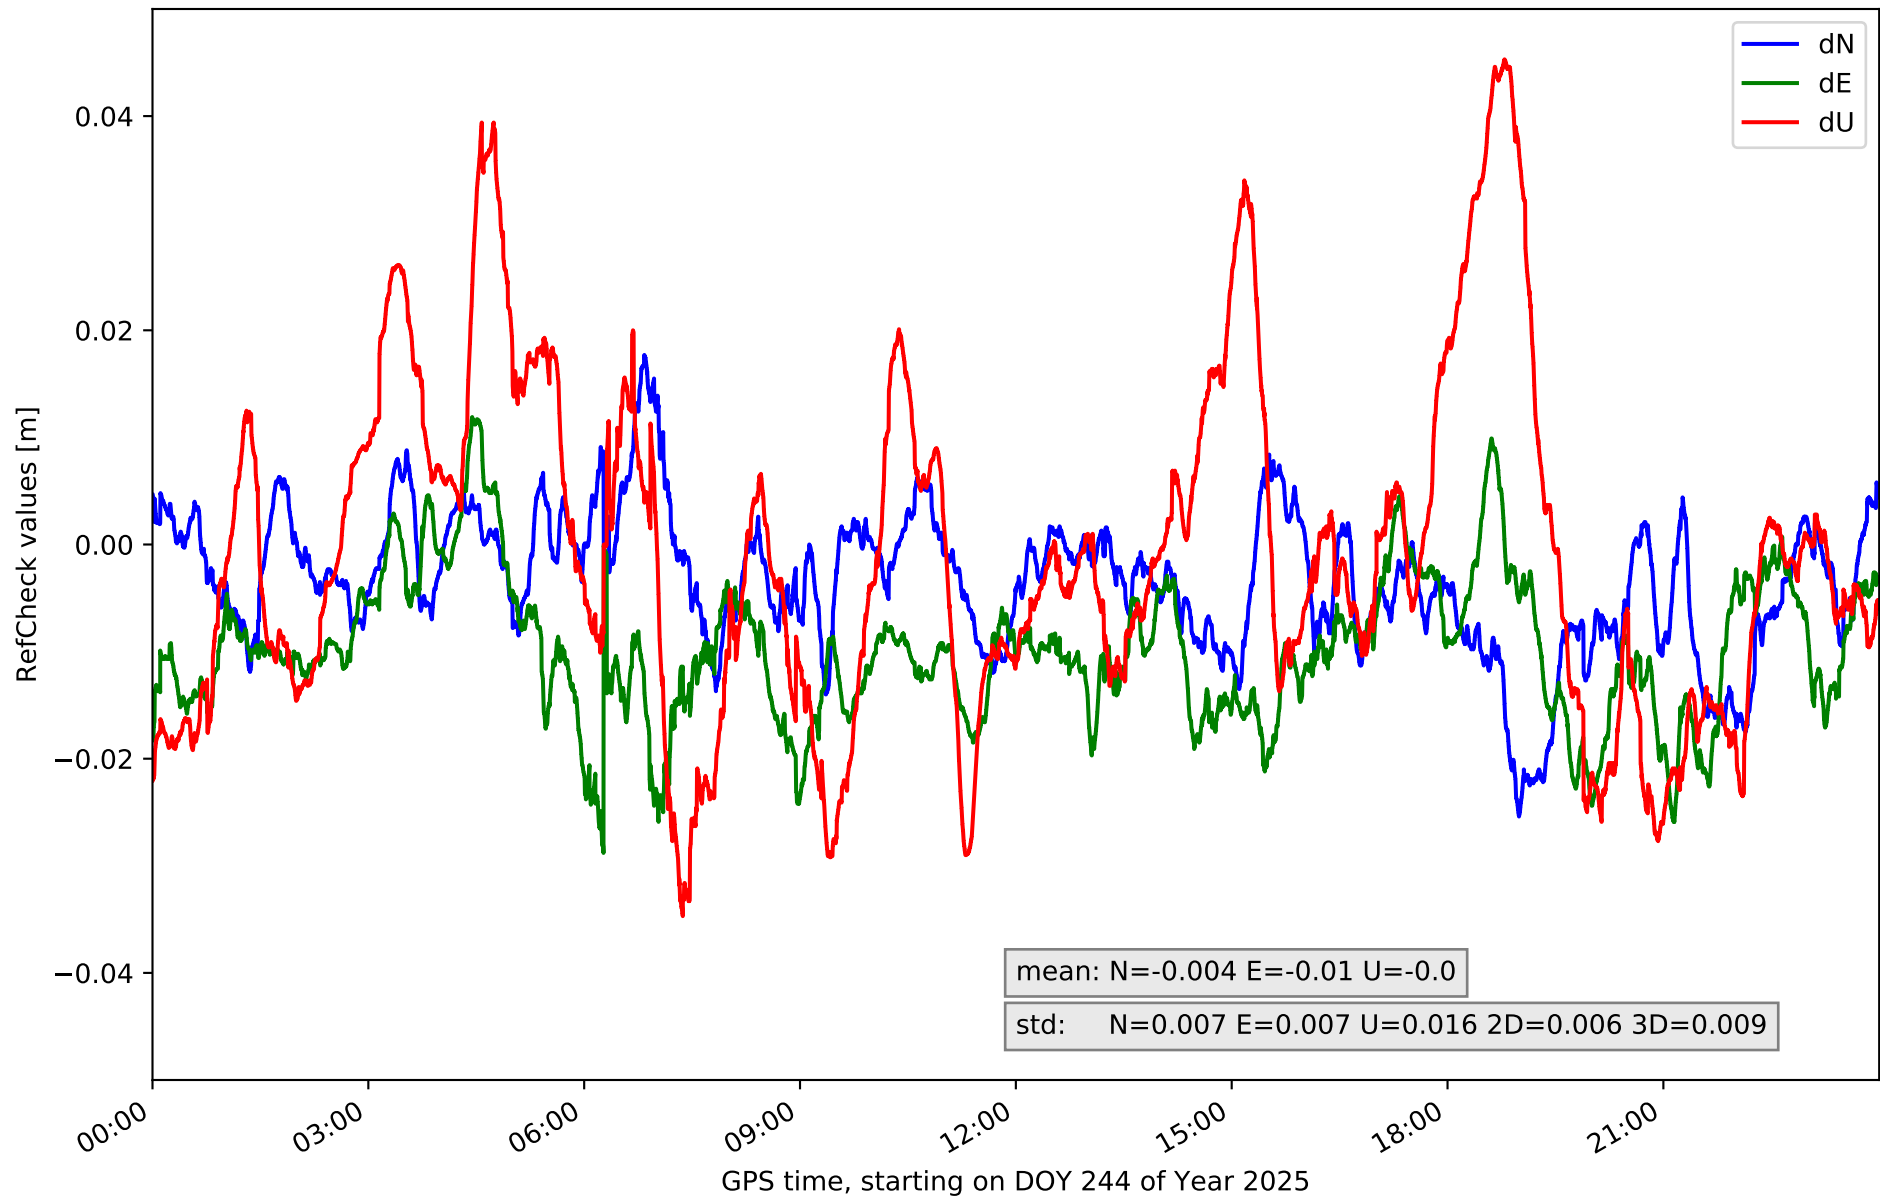


RefCheck for station TN02 in network NT32

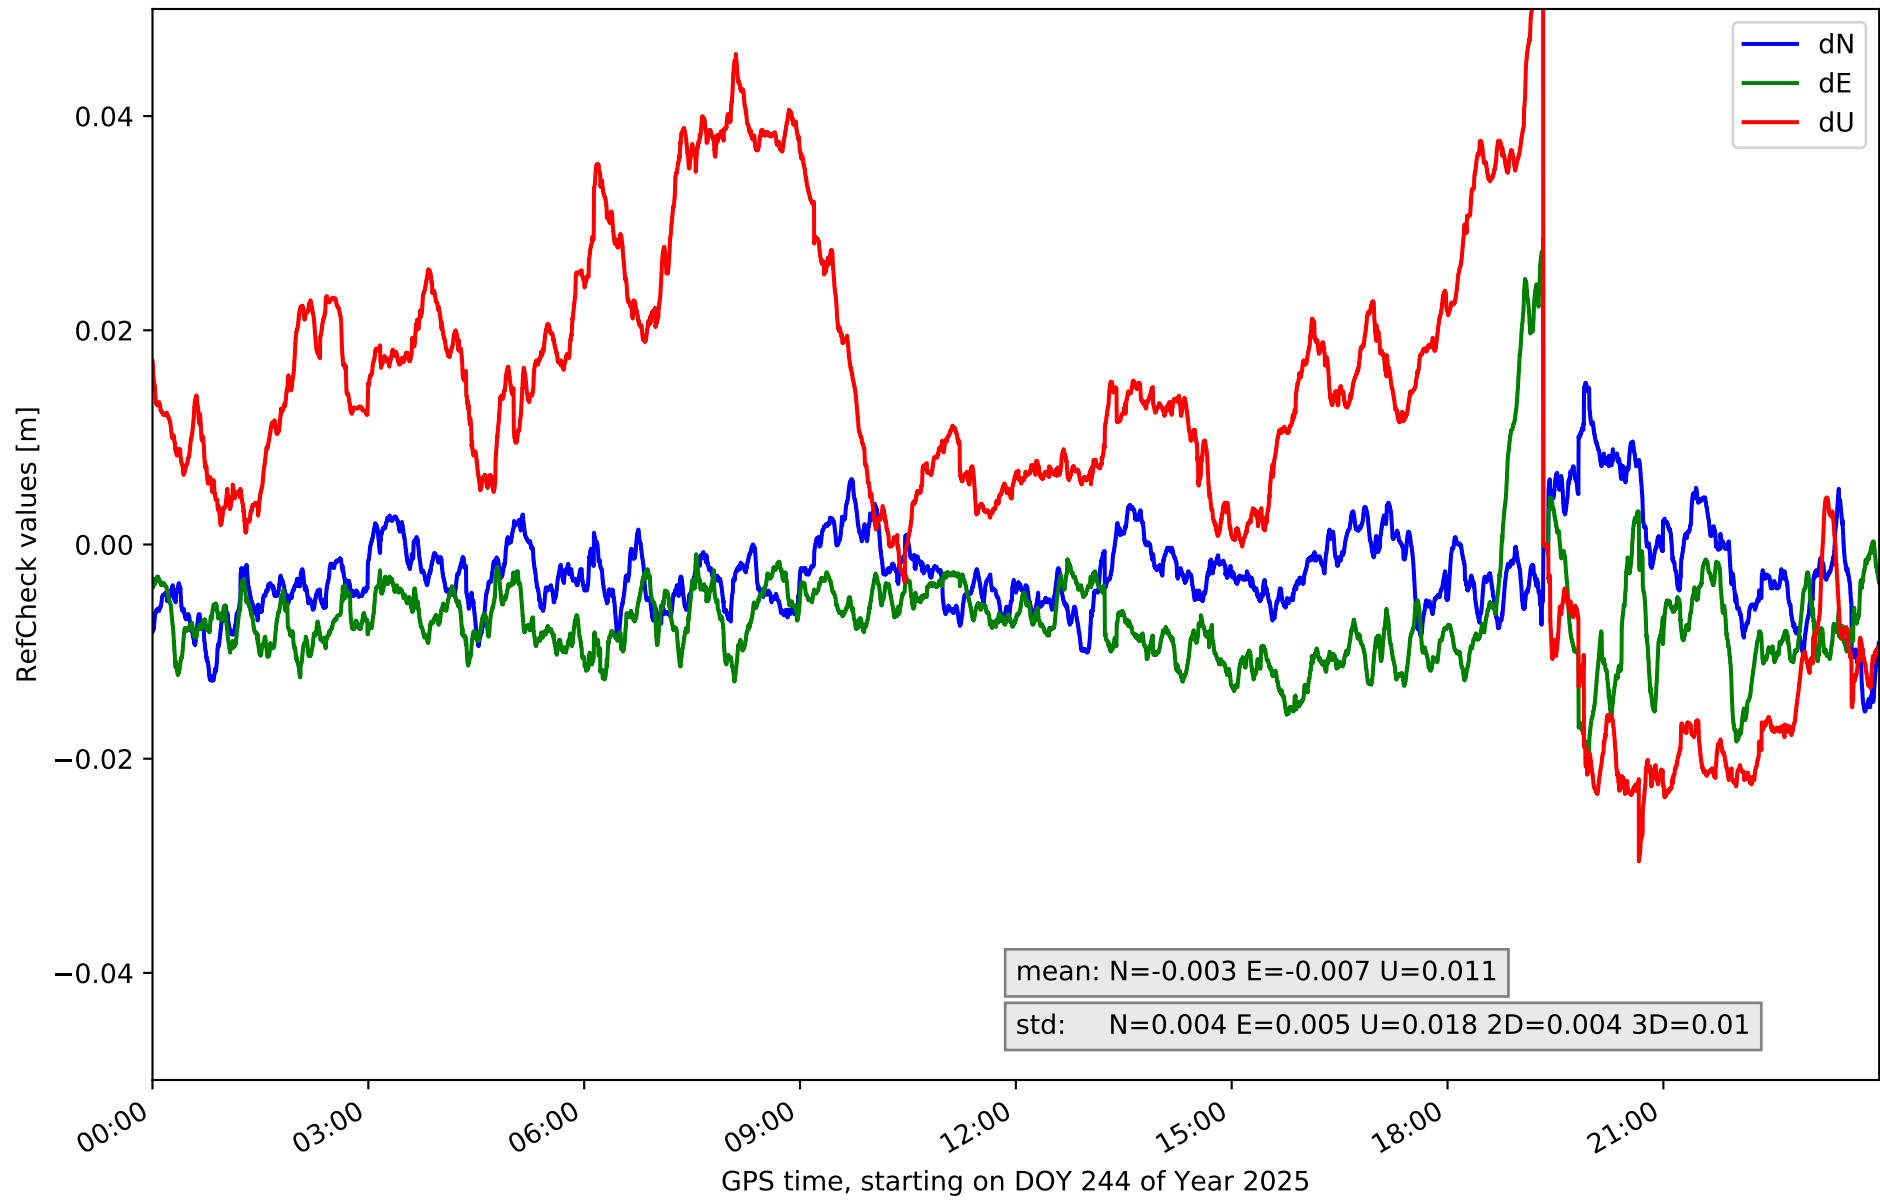


RefCheck for station TN03 in network NT32

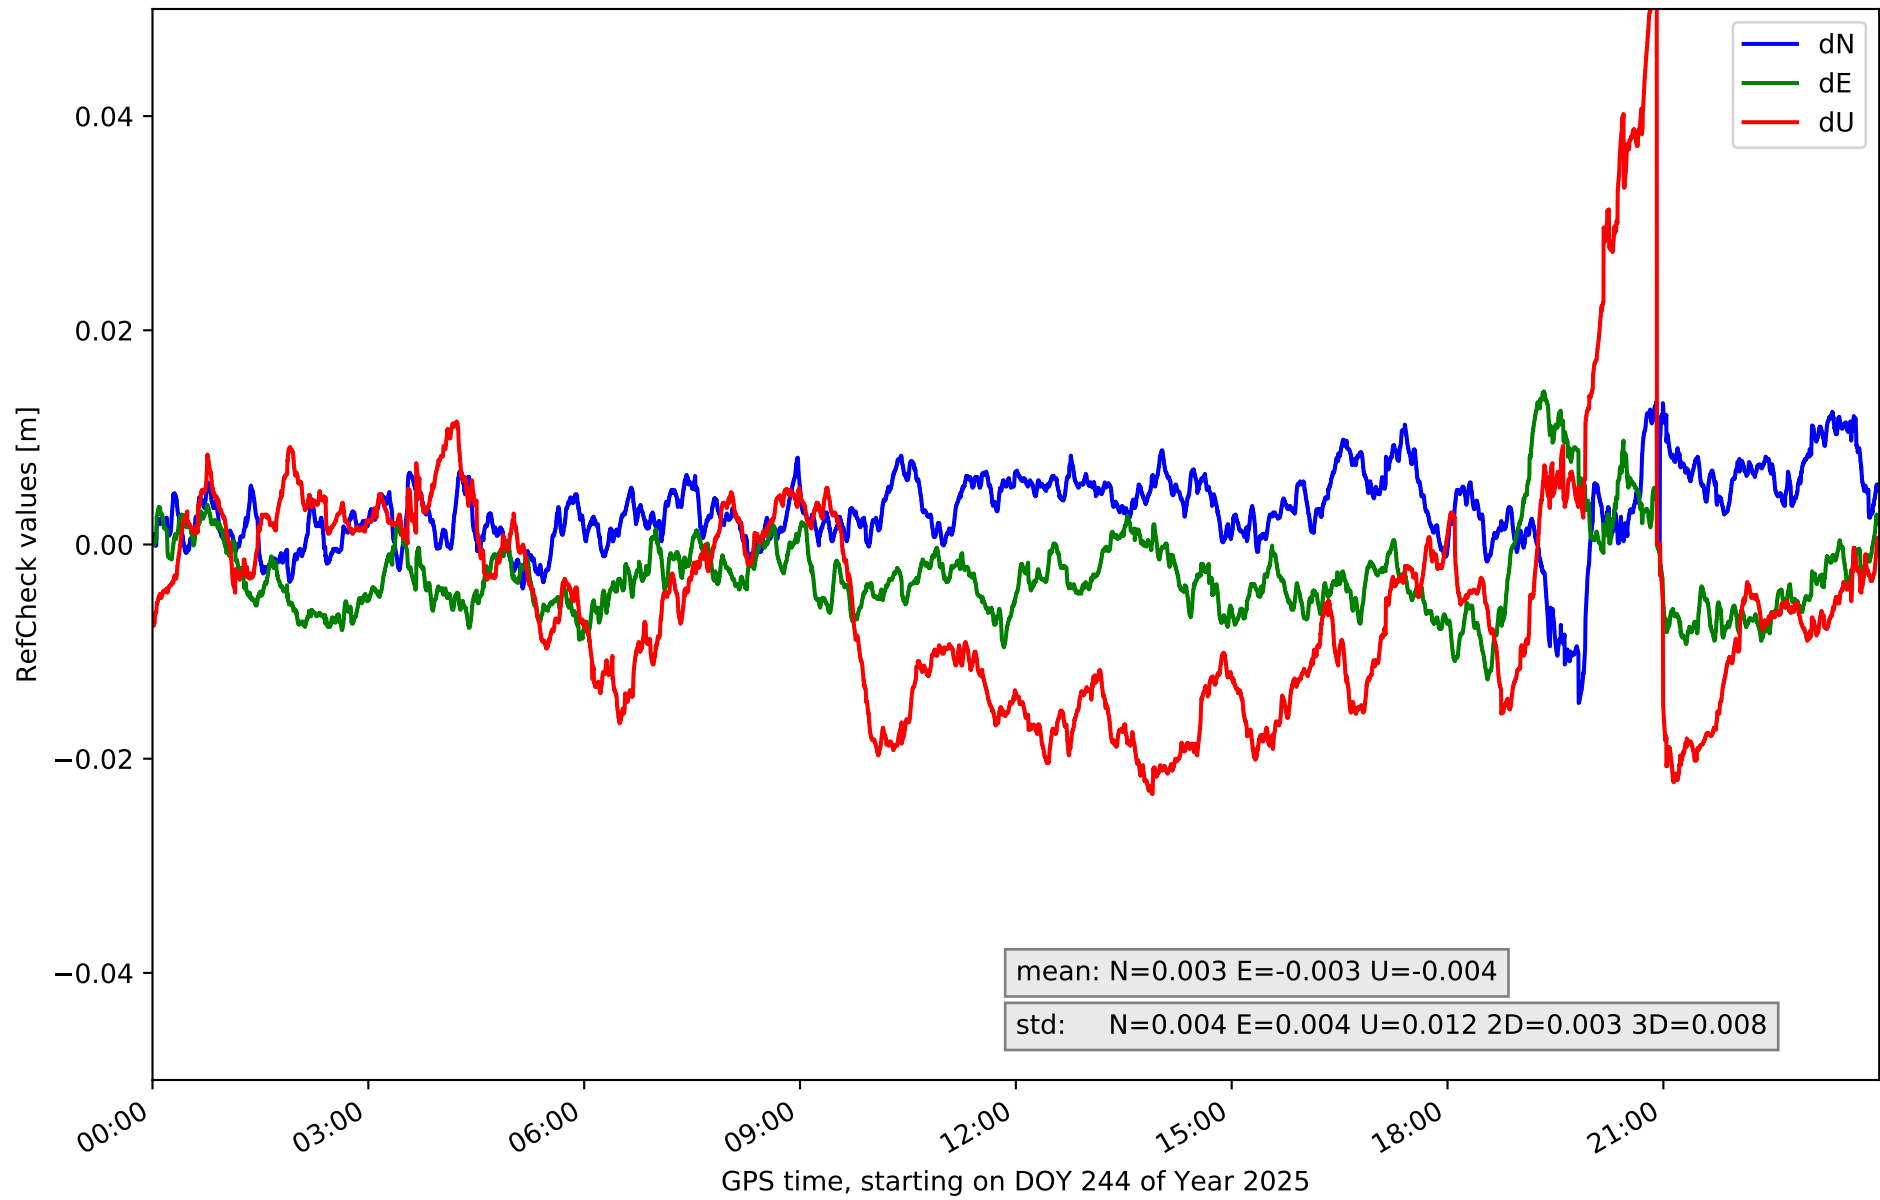


RefCheck for station TN04 in network NT32

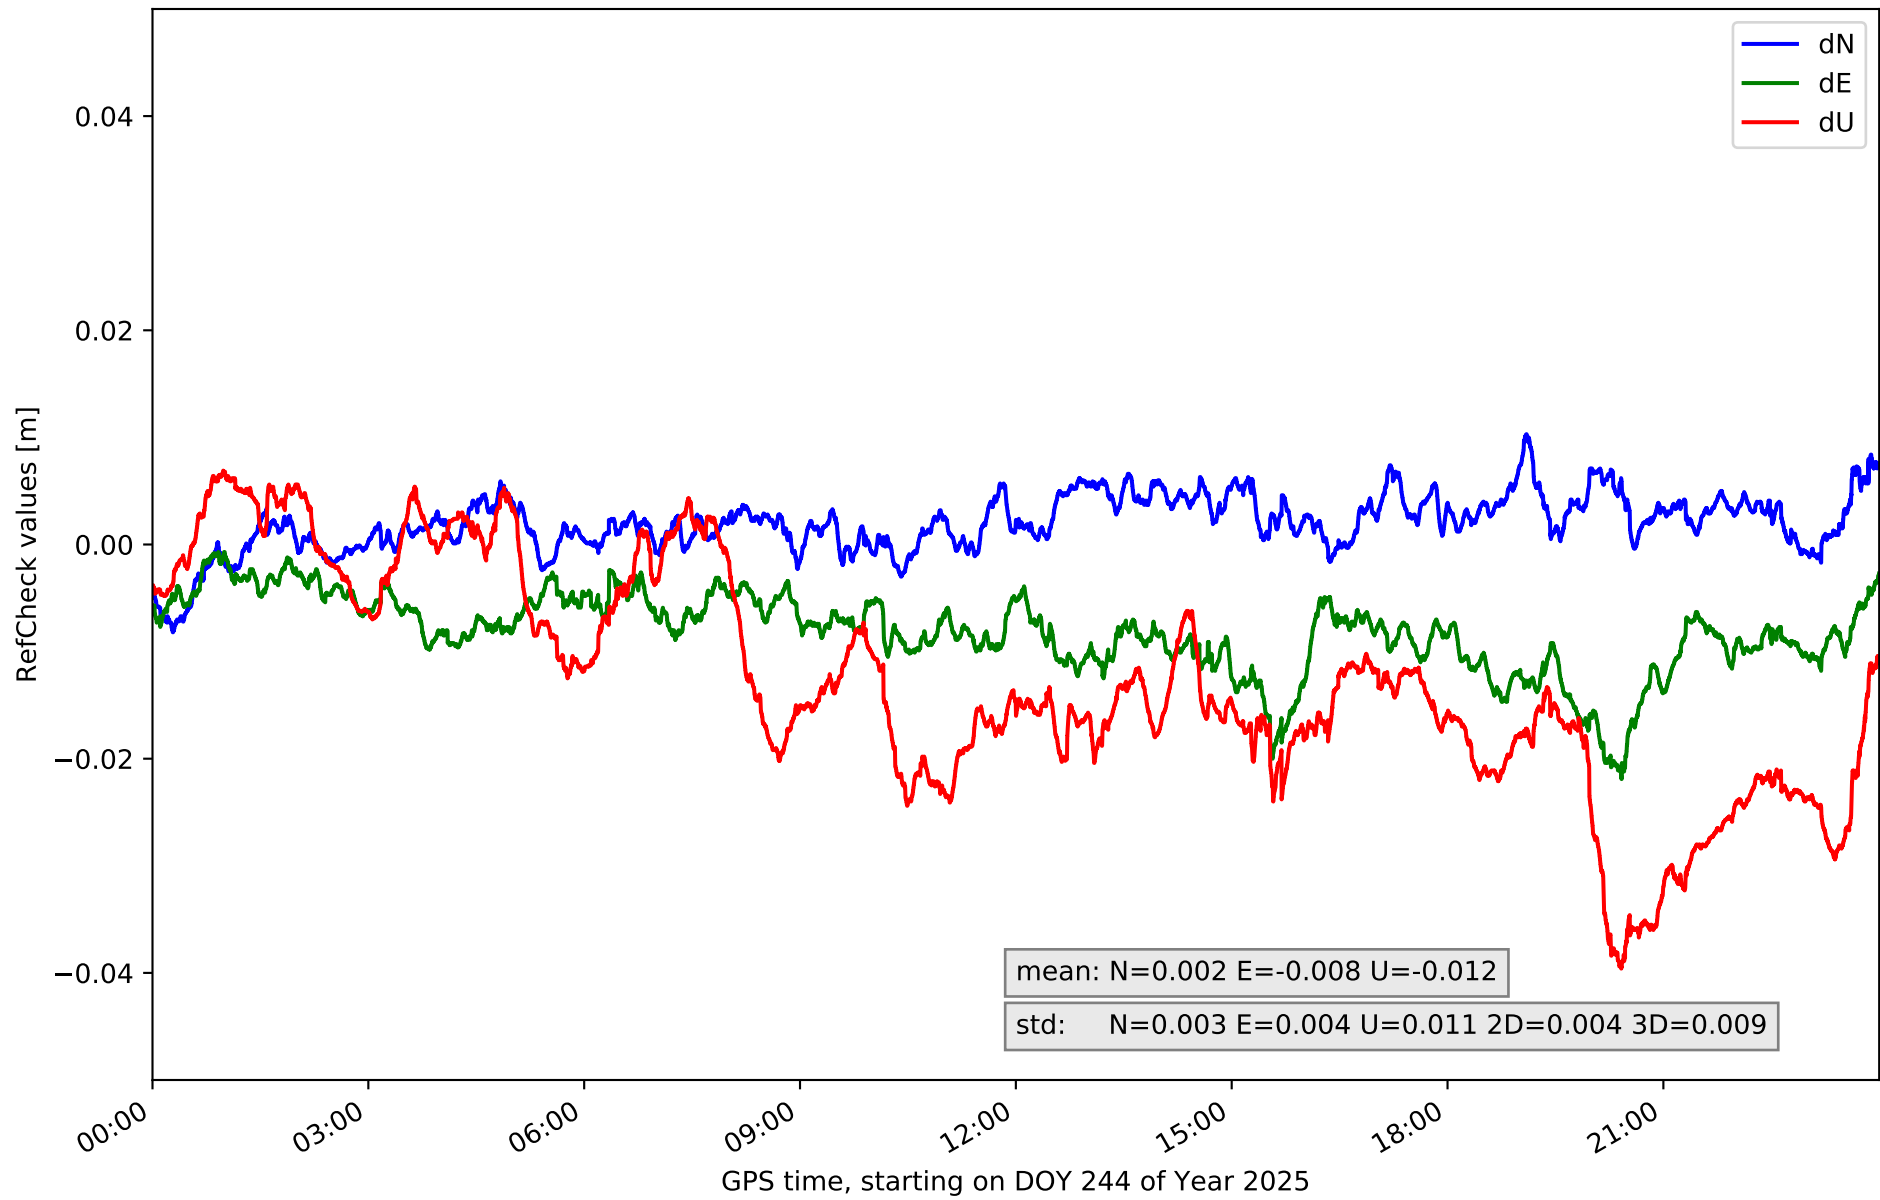


RefCheck for station TN06 in network NT32

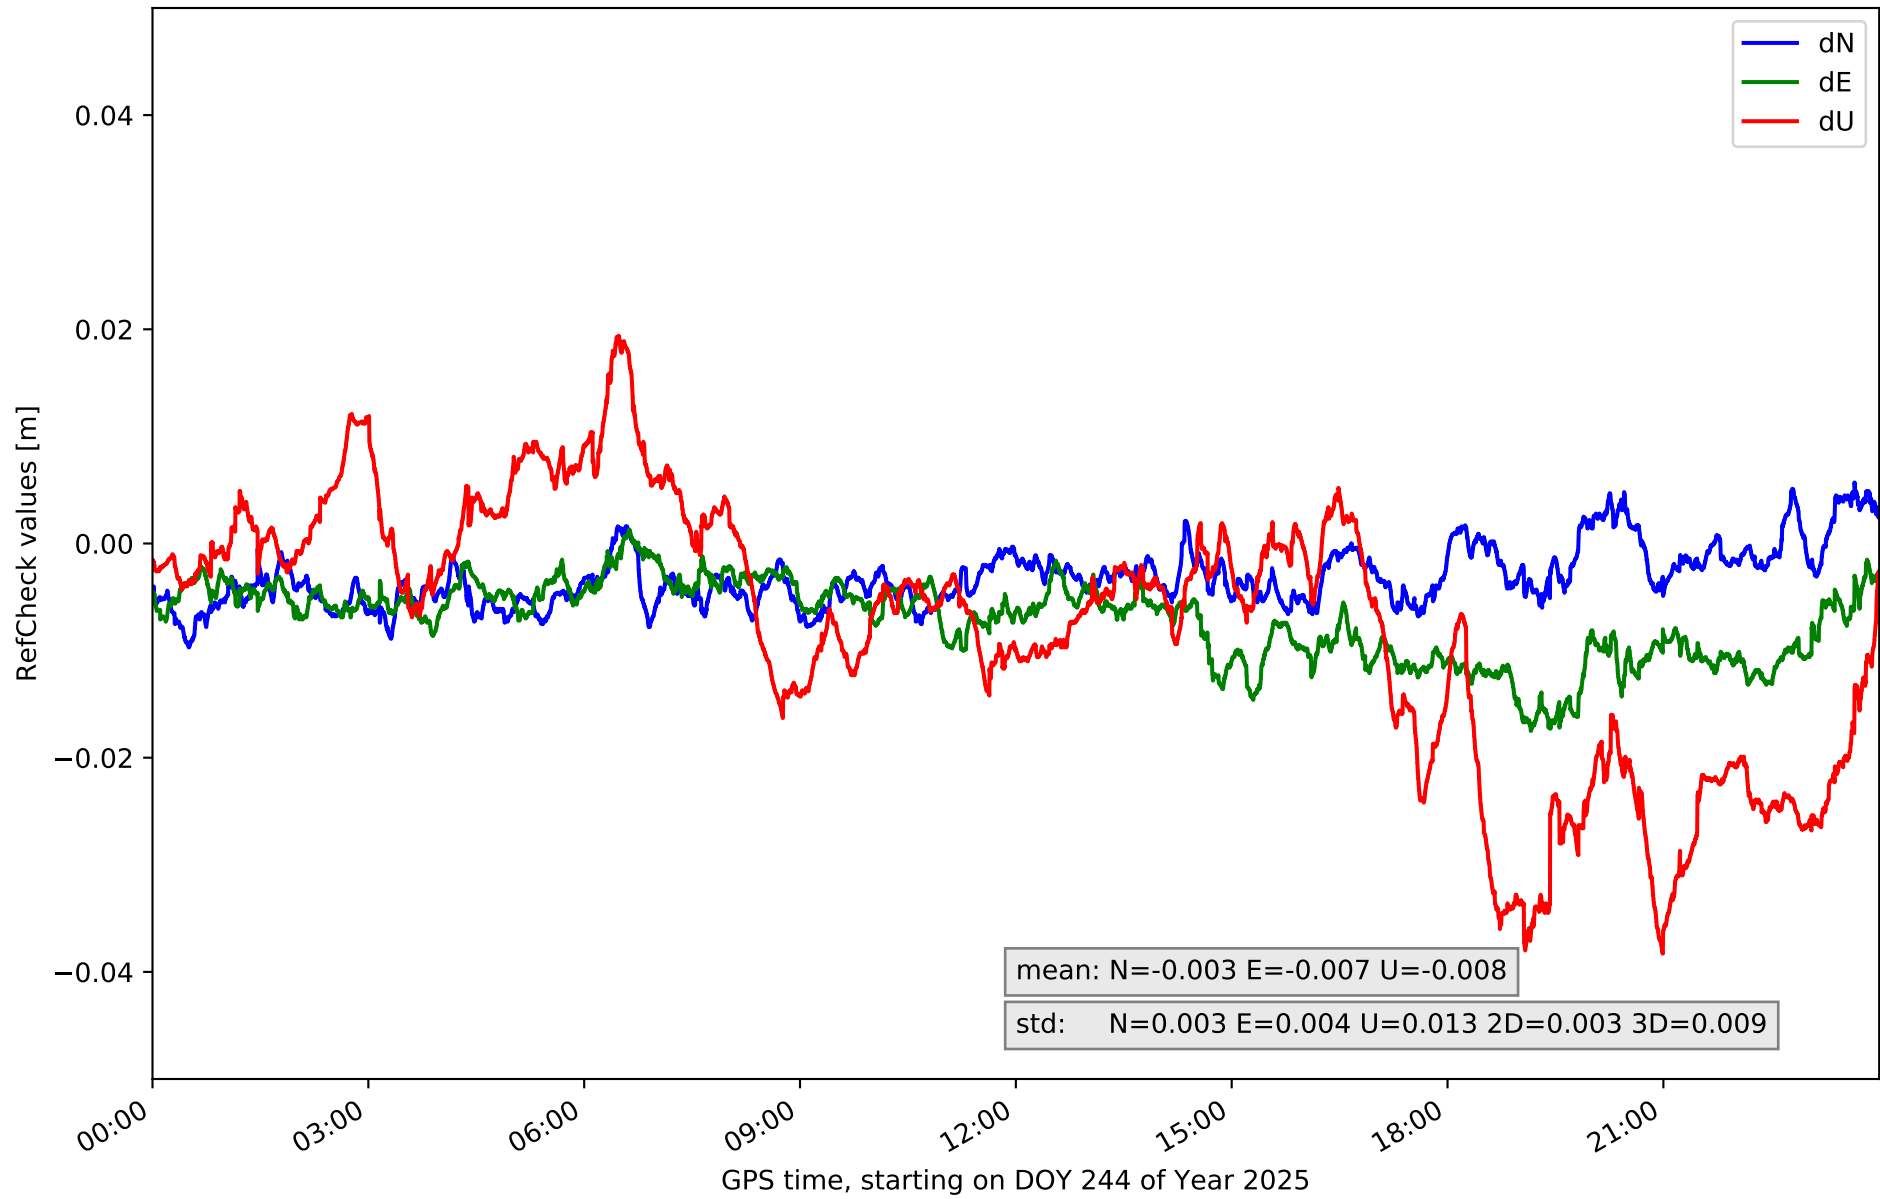

RefCheck for station TN09 in network NT32

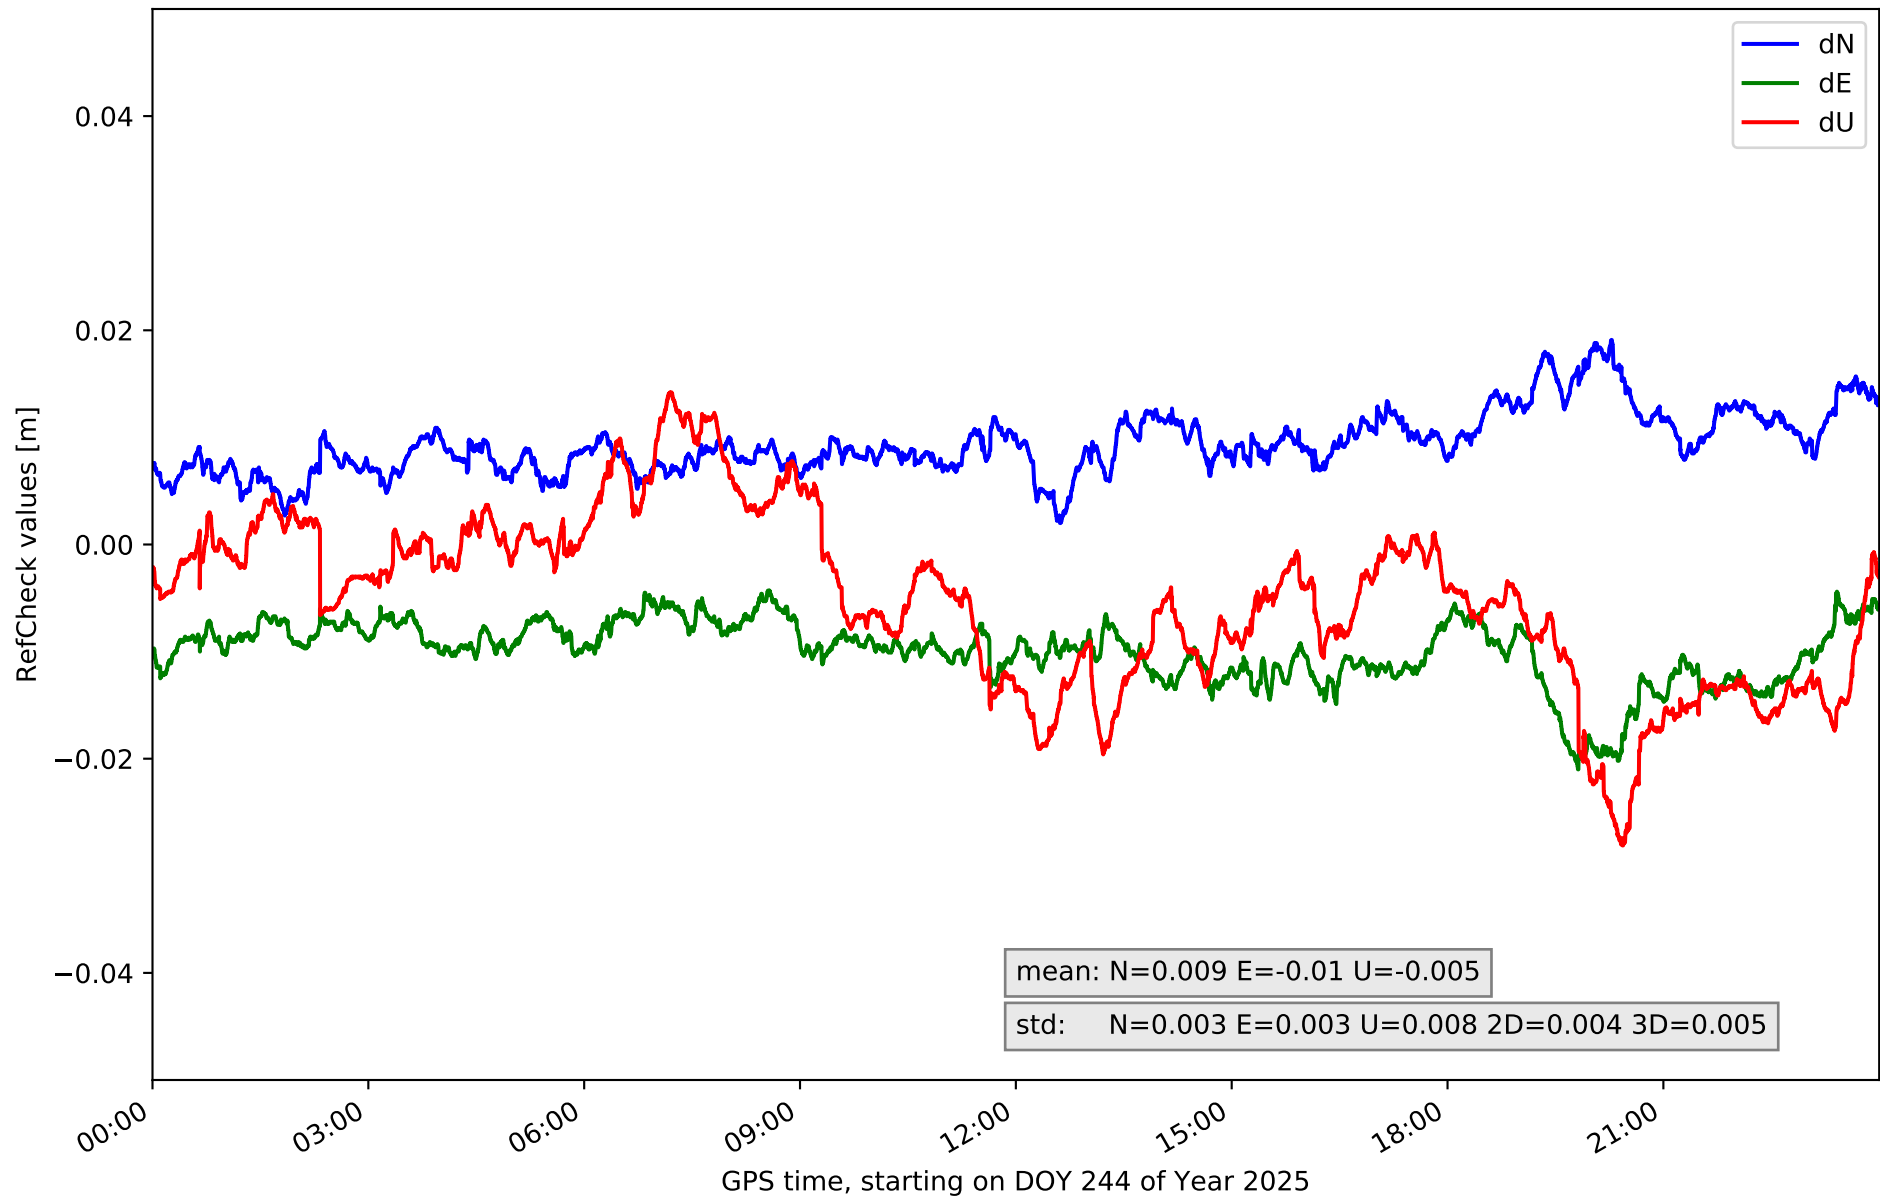

RefCheck for station TE11 in network NT32

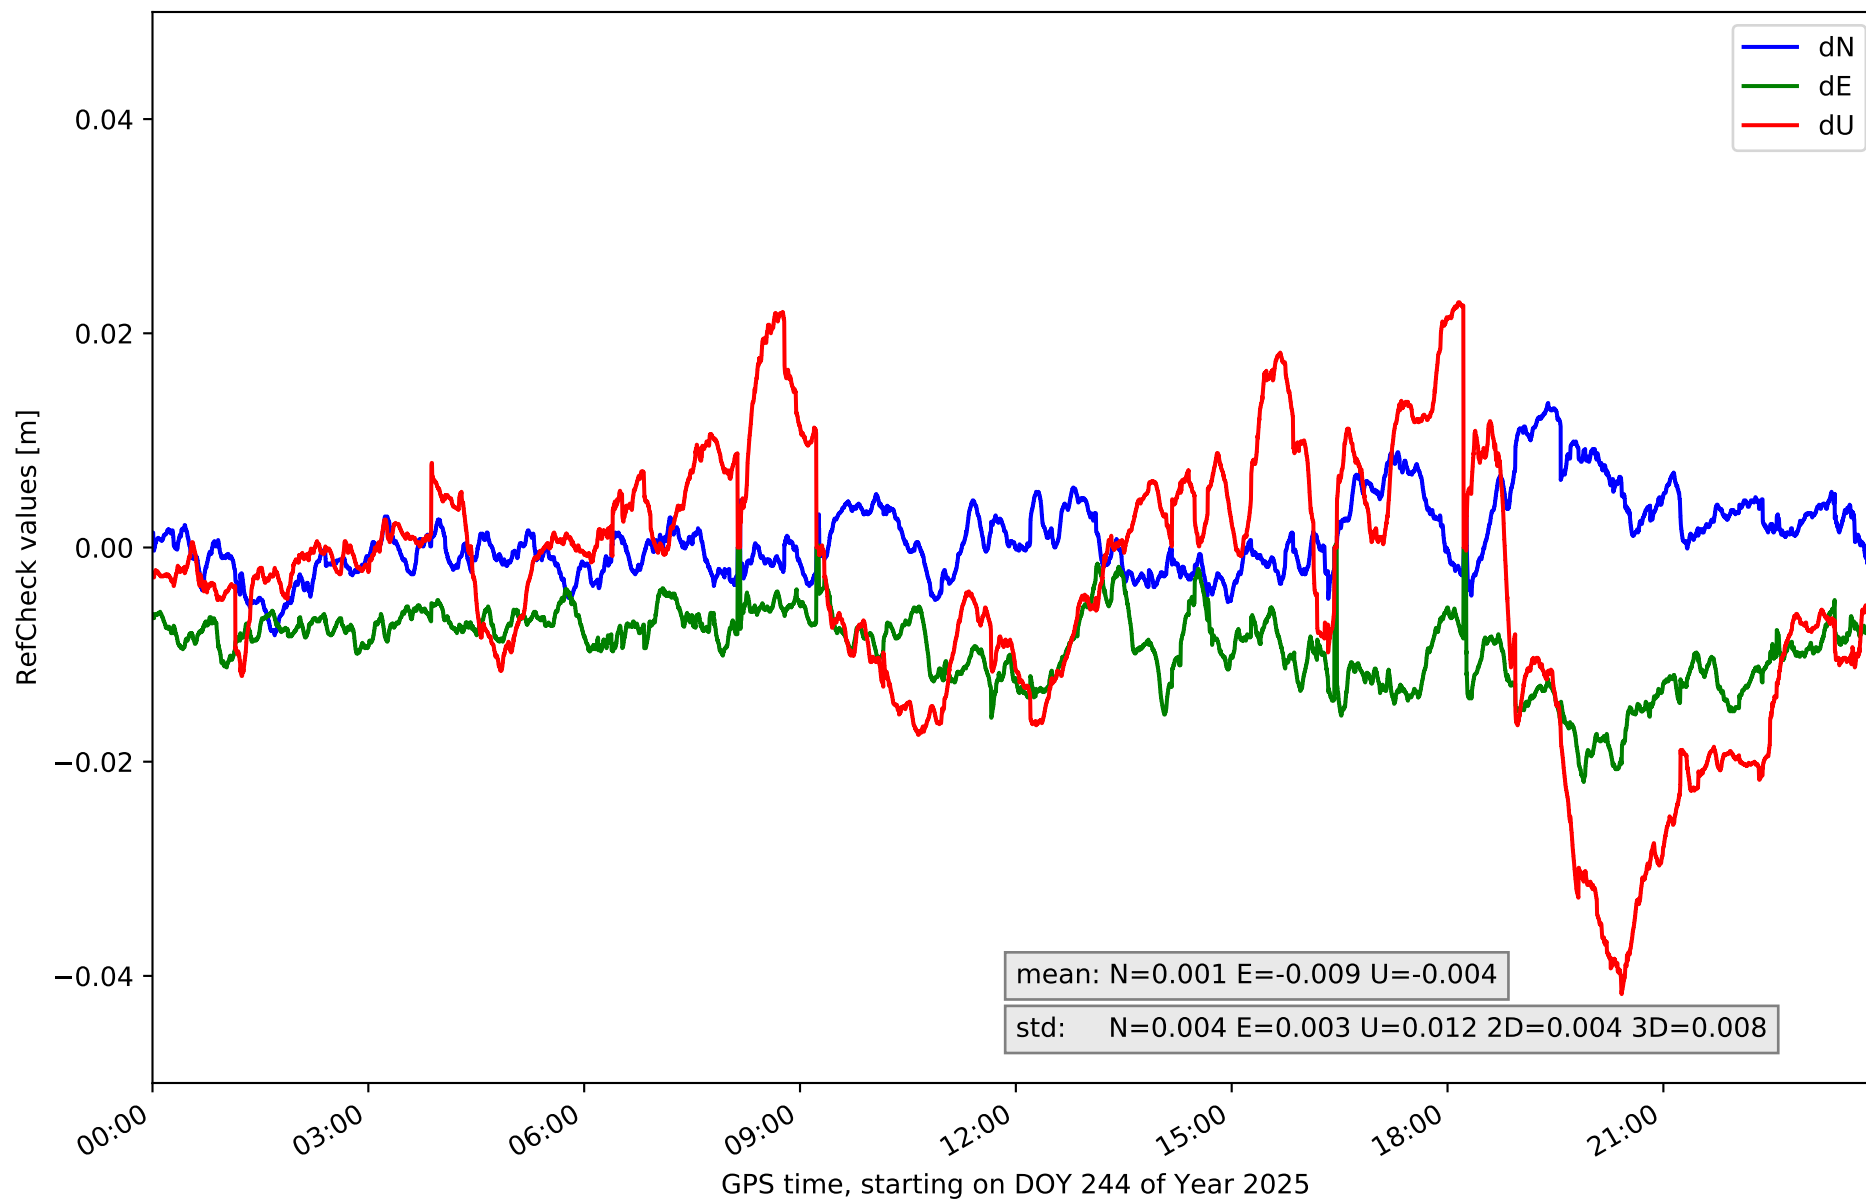

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.005	0.02	0.004	-0.0	0.023	0.005	-0.055	0.024	0.016	0.004	0.009	54154	79.6	28091	41.3
EH02	-0.009	0.024	0.005	-0.002	0.03	0.005	-0.026	0.057	0.014	0.004	0.01	61816	90.8	42471	62.4
GOM1	-0.03	0.016	0.005	-0.027	0.012	0.006	-0.033	0.068	0.018	0.005	0.011	38986	57.3	29400	43.2
IZAN	-0.007	0.007	0.003	-0.018	0.001	0.004	-0.039	0.015	0.011	0.003	0.008	16186	23.8	14472	21.3
LP01	-0.025	0.001	0.004	-0.013	0.019	0.006	-0.047	0.03	0.015	0.004	0.008	58513	86.0	26721	39.3
LP03	-0.029	0.009	0.005	-0.026	0.031	0.007	-0.038	0.024	0.011	0.005	0.008	19591	28.8	17365	25.5
LPAL	-0.016	0.002	0.003	-0.002	0.019	0.003	-0.032	0.012	0.008	0.003	0.004	59452	87.3	21840	32.1
LRES	-0.001	0.019	0.004	-0.002	0.031	0.007	-0.039	0.016	0.012	0.006	0.008	57070	83.8	43752	64.3
TN01	-0.025	0.018	0.007	-0.029	0.012	0.007	-0.035	0.045	0.016	0.006	0.009	45592	67.0	29473	43.3
TN02	-0.016	0.015	0.004	-0.019	0.029	0.005	-0.03	0.06	0.018	0.004	0.01	26456	38.9	31117	45.7
TN03	-0.015	0.013	0.004	-0.013	0.014	0.004	-0.023	0.061	0.012	0.003	0.008	9454	13.9	6458	9.5
TN04	-0.008	0.01	0.003	-0.022	-0.001	0.004	-0.04	0.007	0.011	0.004	0.009	20850	30.6	23917	35.1
TN06	-0.01	0.006	0.003	-0.018	0.001	0.004	-0.038	0.019	0.013	0.003	0.009	21938	32.2	18471	27.1
TN09	0.002	0.019	0.003	-0.021	-0.004	0.003	-0.028	0.014	0.008	0.004	0.005	60216	88.5	14628	21.5
TE11	-0.008	0.013	0.004	-0.022	0.0	0.003	-0.042	0.023	0.012	0.004	0.008	26517	39.0	14575	21.4
Mean	-0.013	0.013	0.004	-0.016	0.014	0.005	-0.036	0.032	0.013	0.004	0.008	38452.7	56.5	24183.4	35.5
Min/Max	-0.03	0.024	0.007	-0.029	0.031	0.007	-0.055	0.068	0.018	0.006	0.011	61816	90.8	43752	64.3

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	90.6	92.1	91.8	91.9	88.6
considering satellites with dual-frequency fixed	87.9	87.8	86.2	89.7	87.2
considering all signals separately	87.7	87.3	86.2	90.3	84.8