

summary for network N32T

timeperiod chosen: from 2025-09-10-00:00:00 until 2025-09-10-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.2 seconds


average fixing percentage with threshold set to 0.3: 89.1 percent

stations available: 14 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15


Processing rate in network N32T

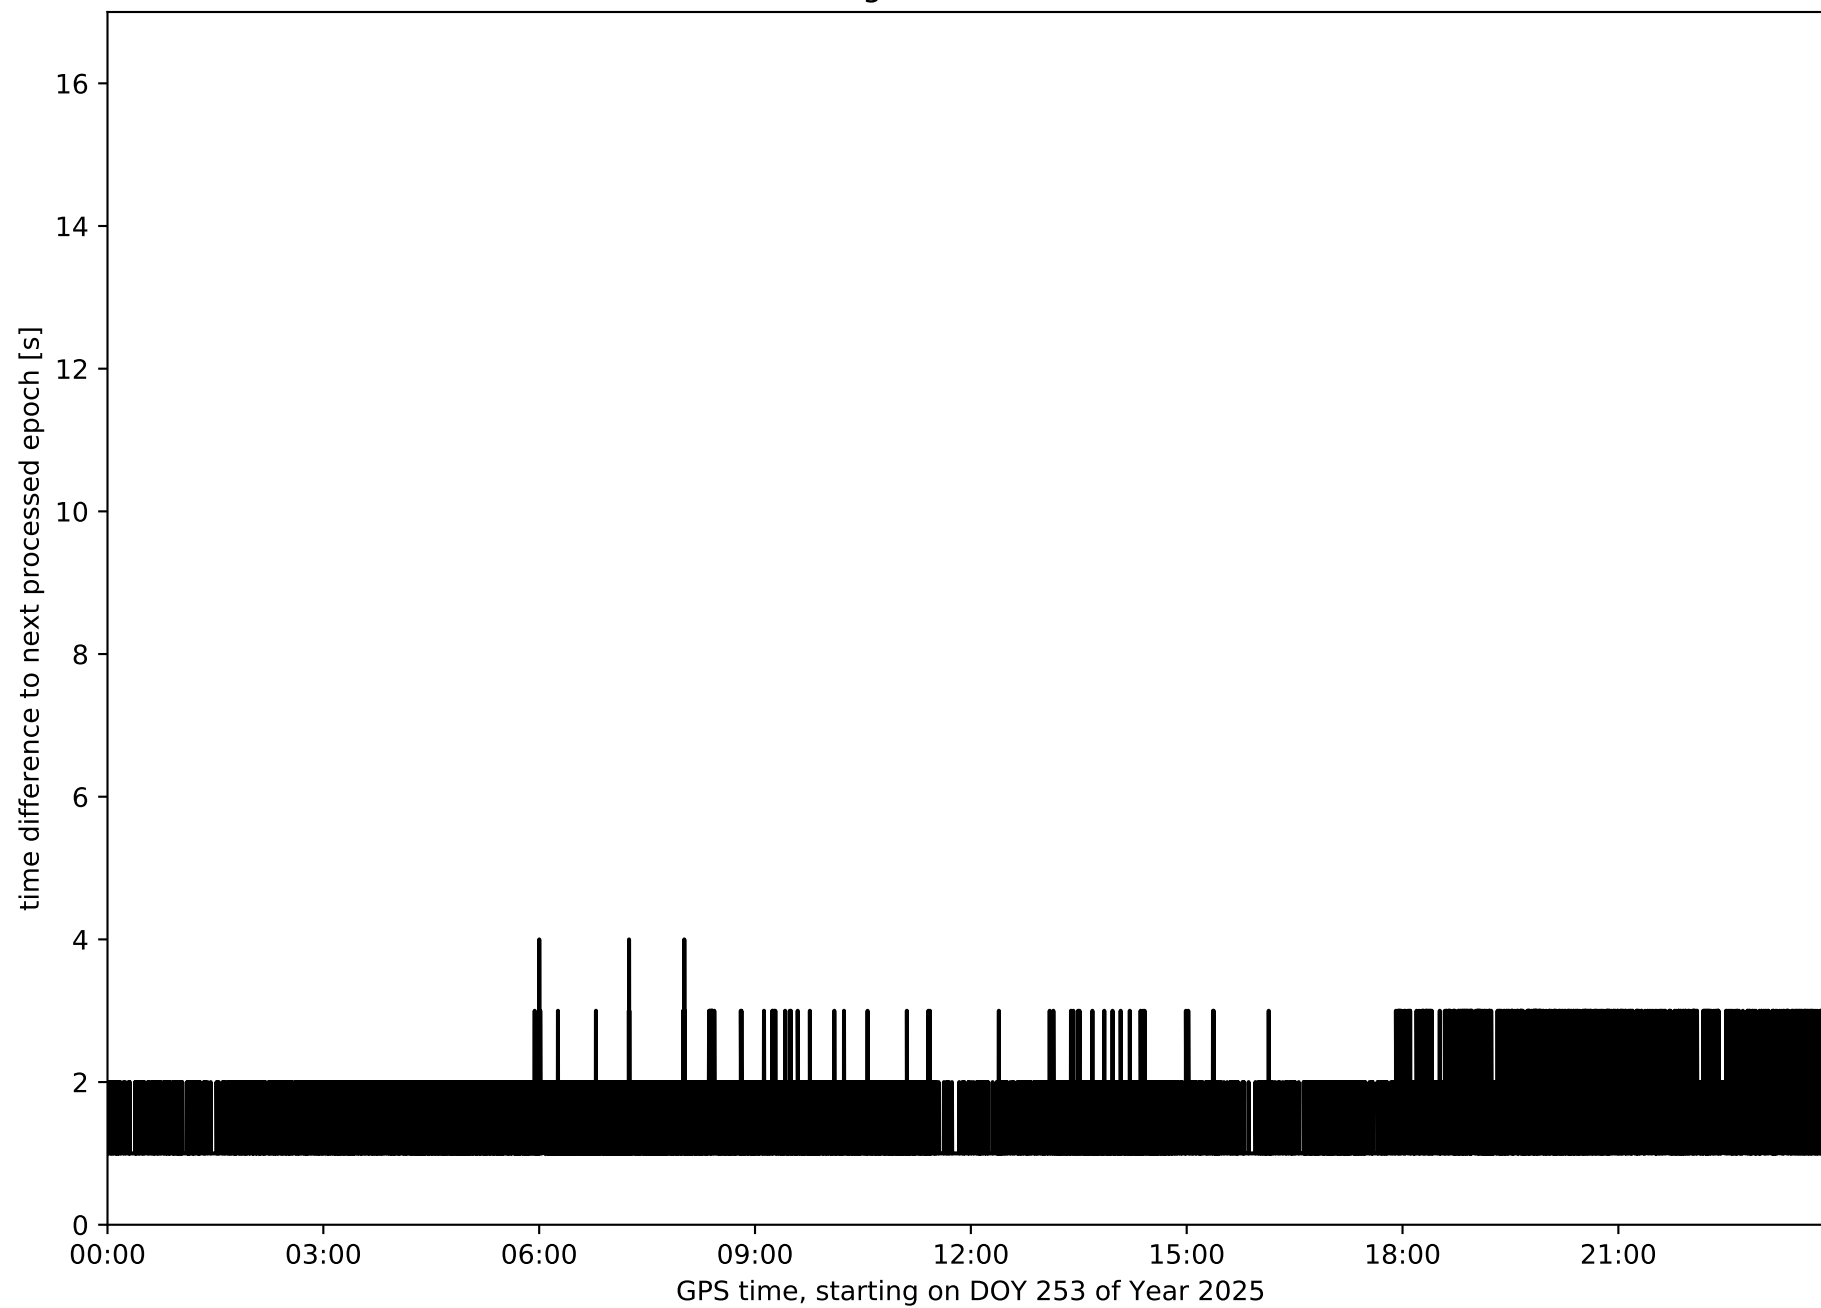


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

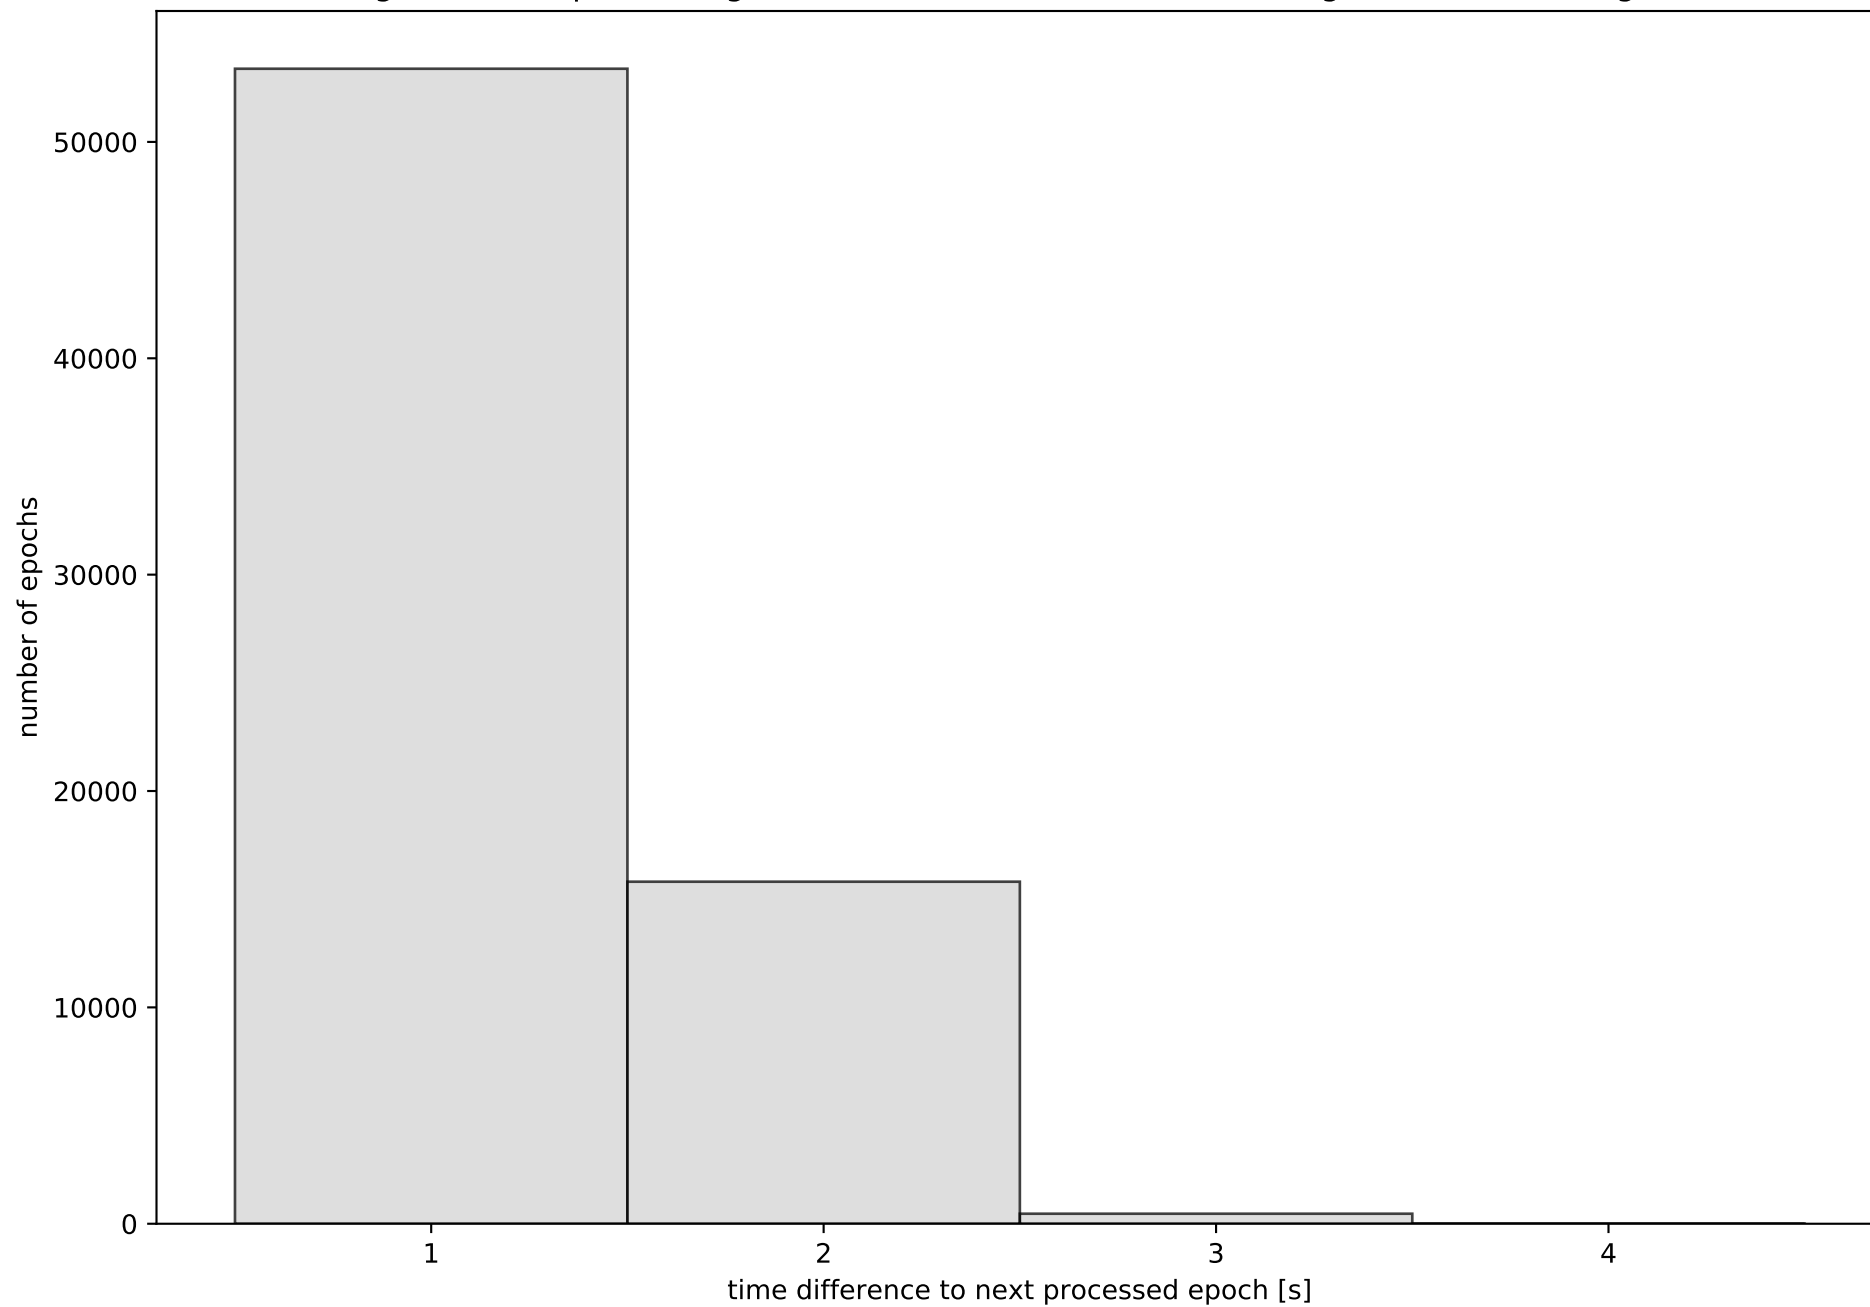


Network N32T with threshold set to 0.3

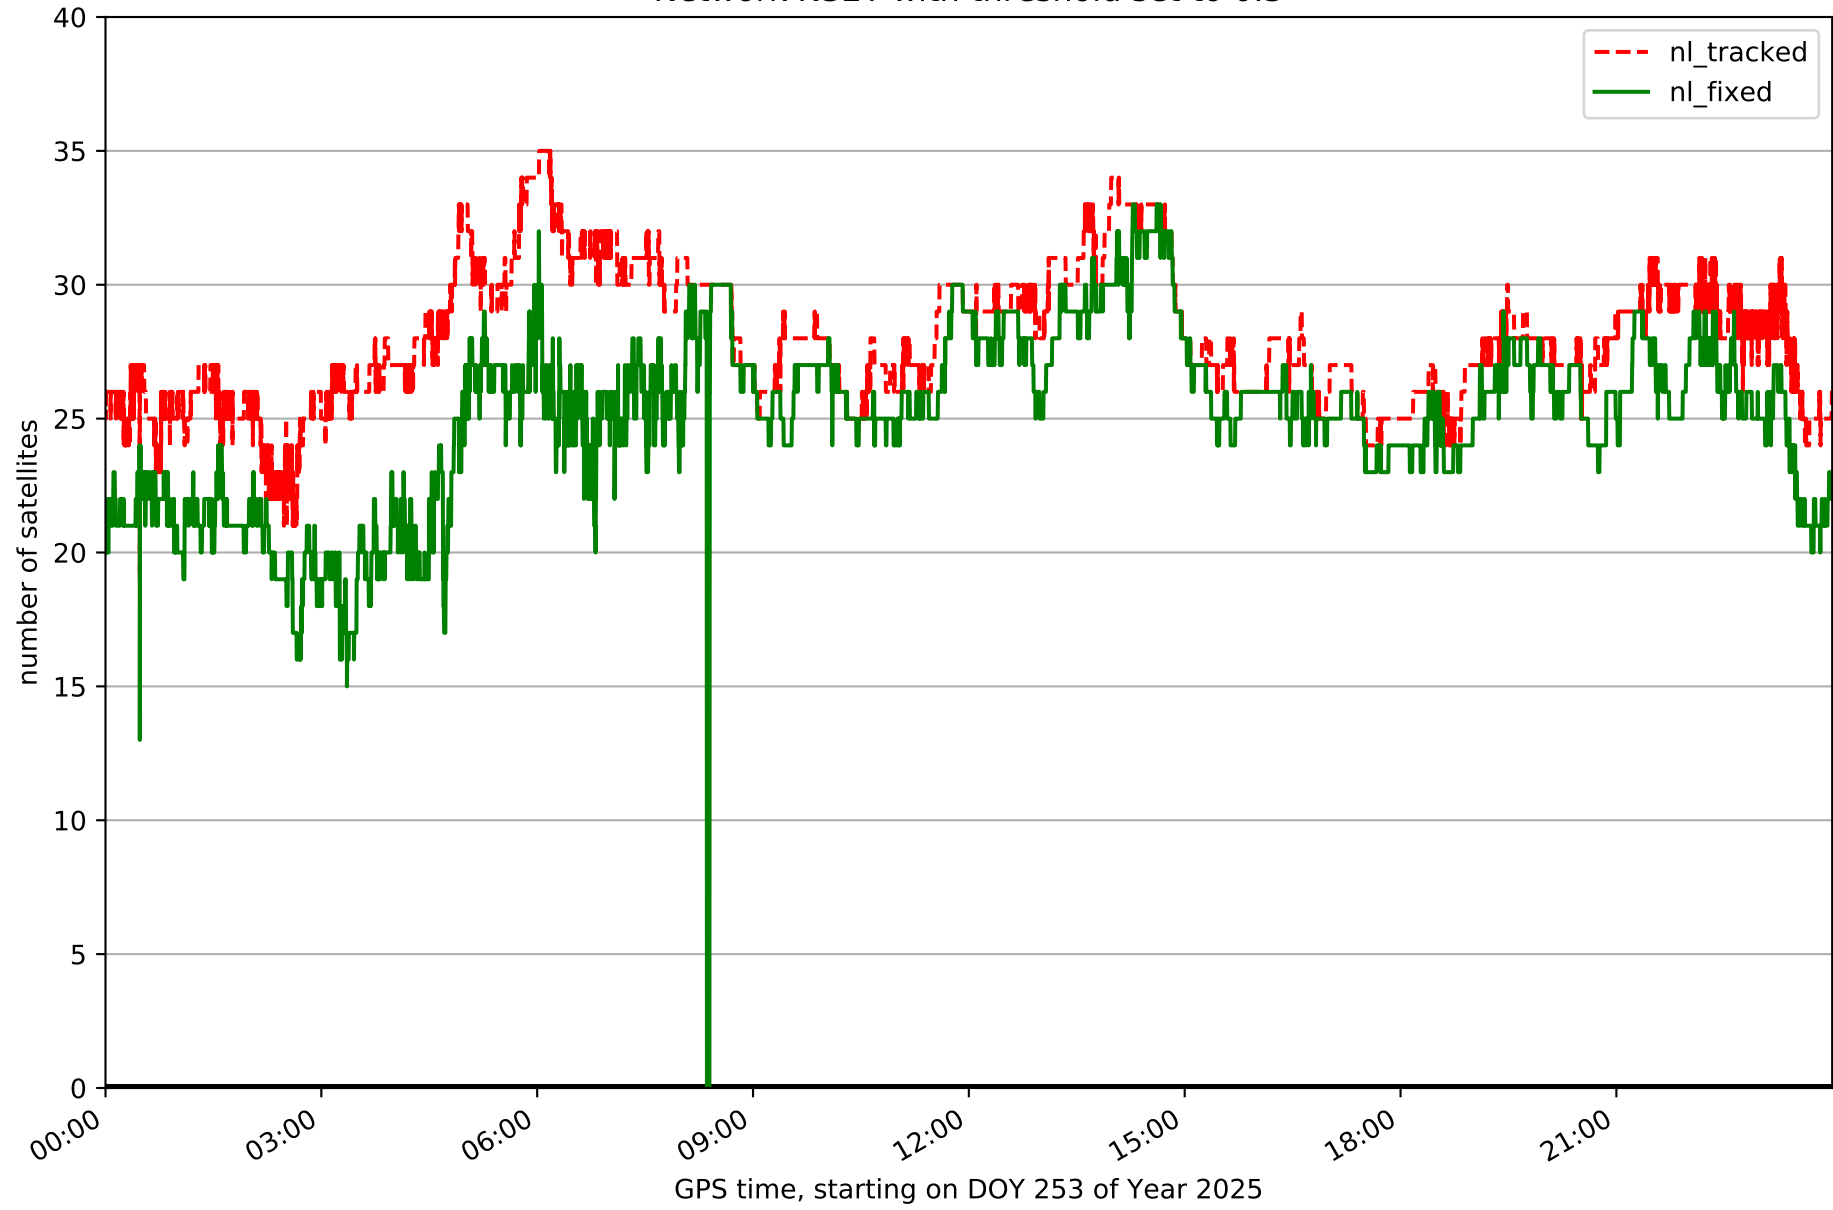


Fixing percentage of satellites in network N32T with threshold set to 0.3

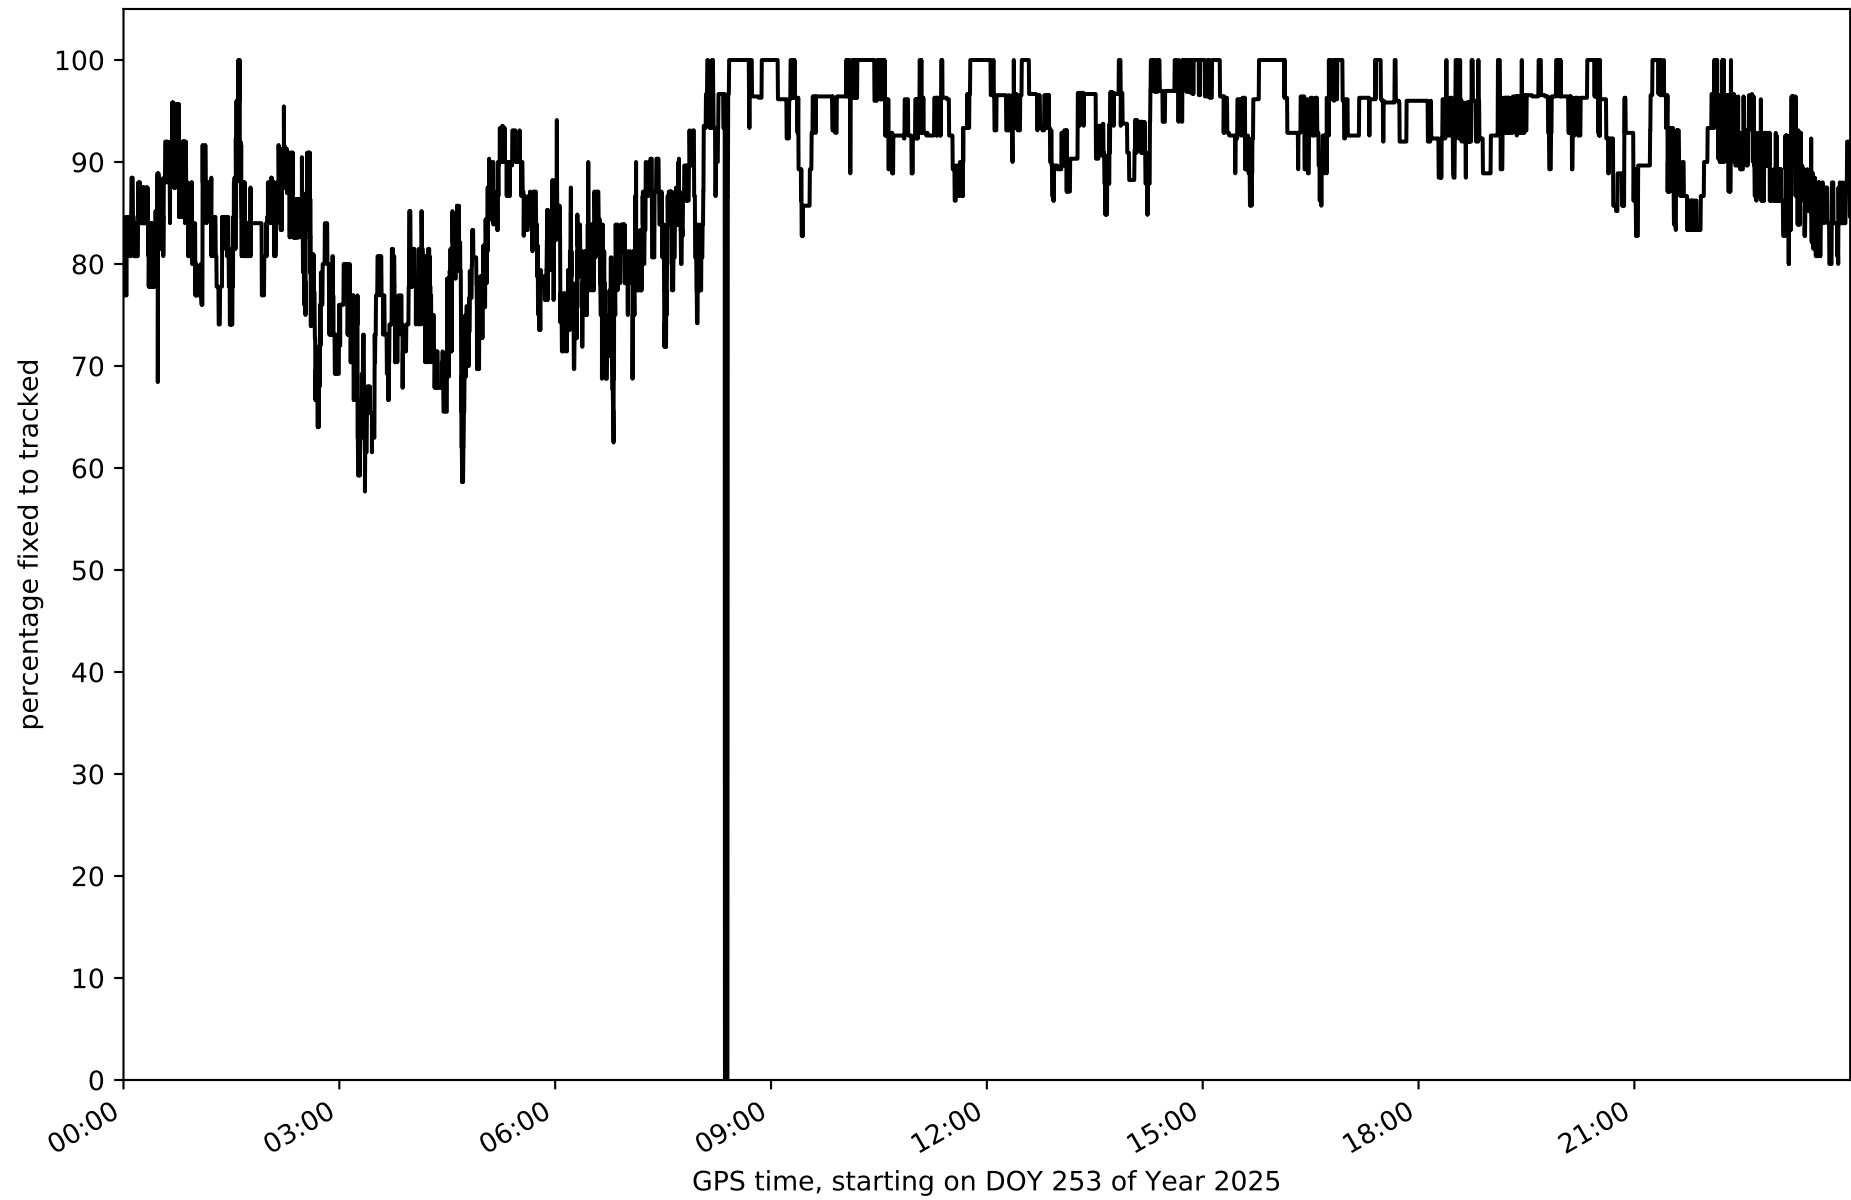


Network N32T - only GPS with threshold set to 0.3

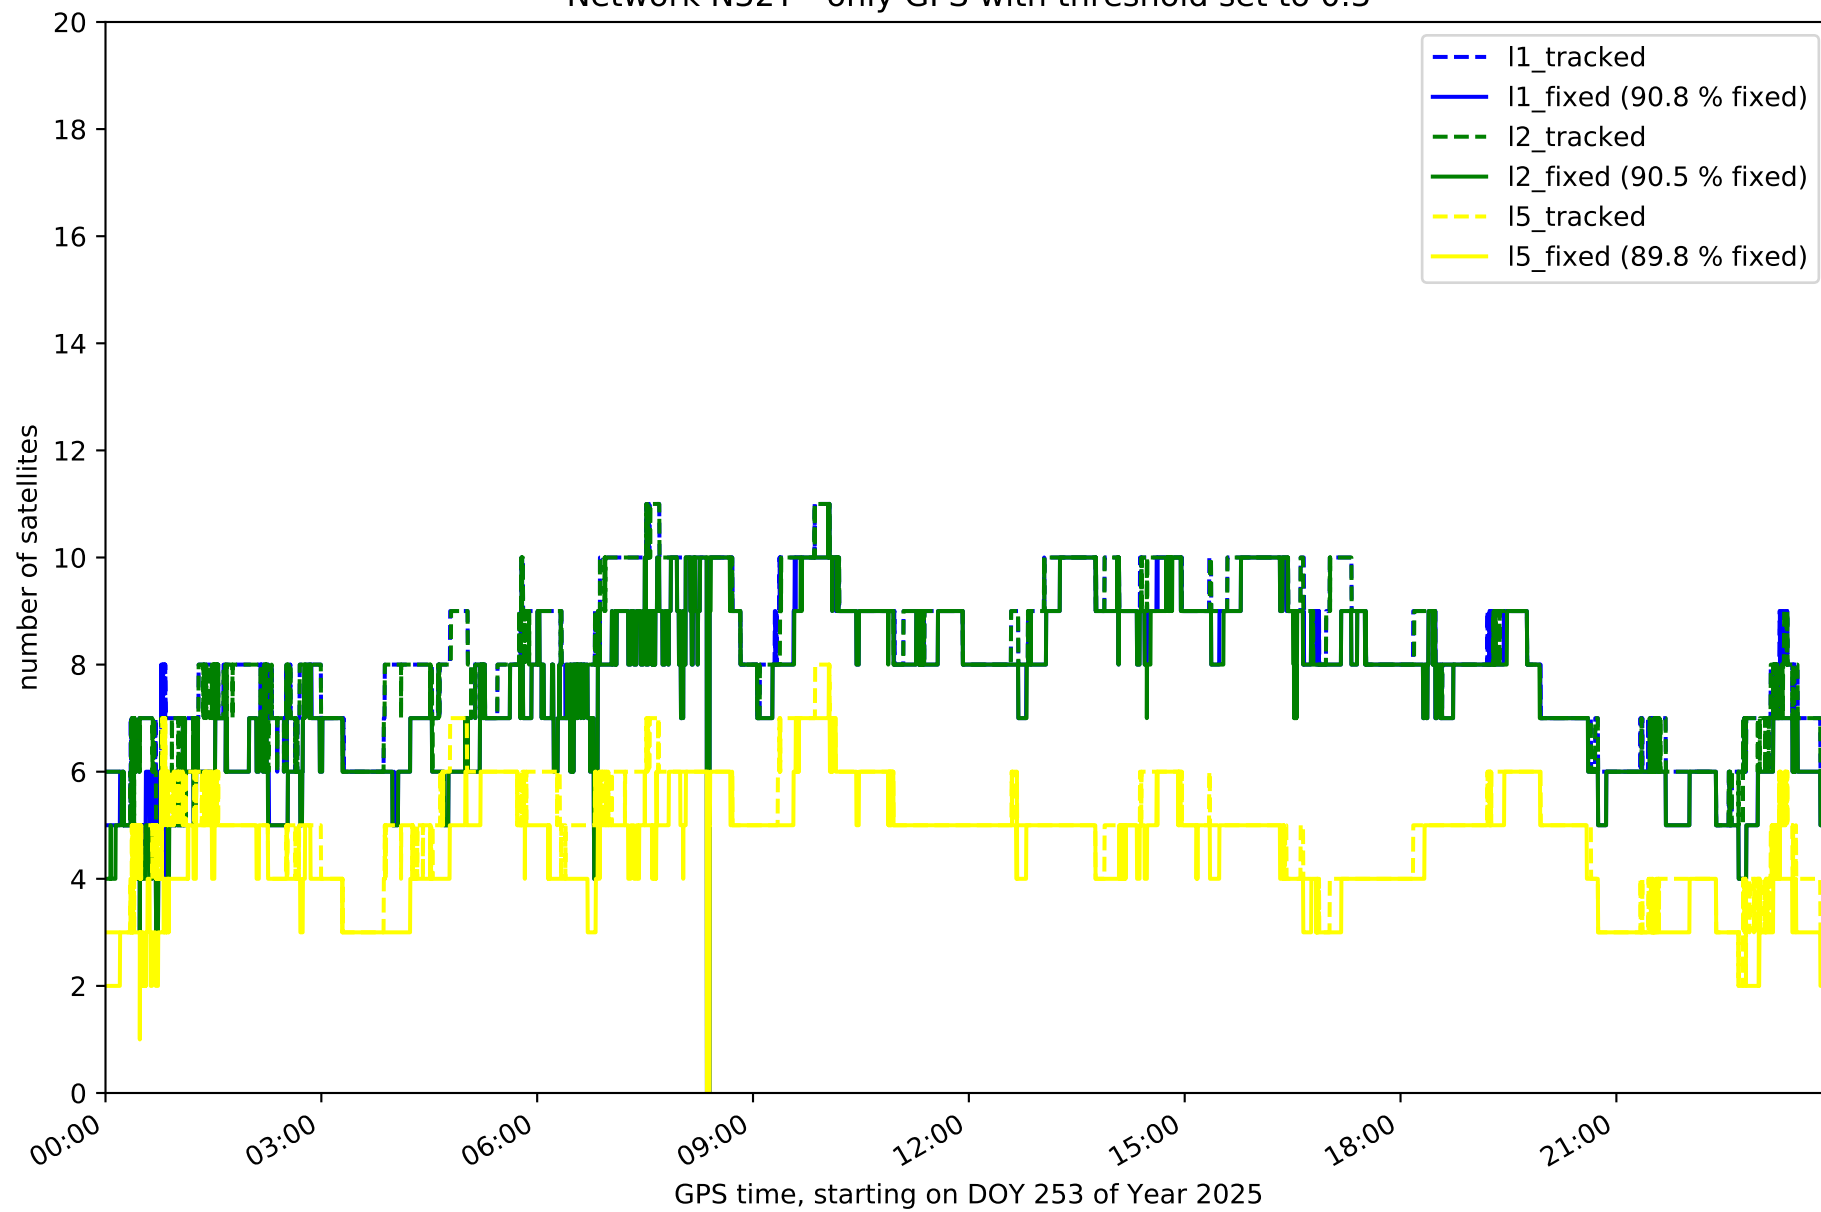


Network N32T - only GLONASS with threshold set to 0.3

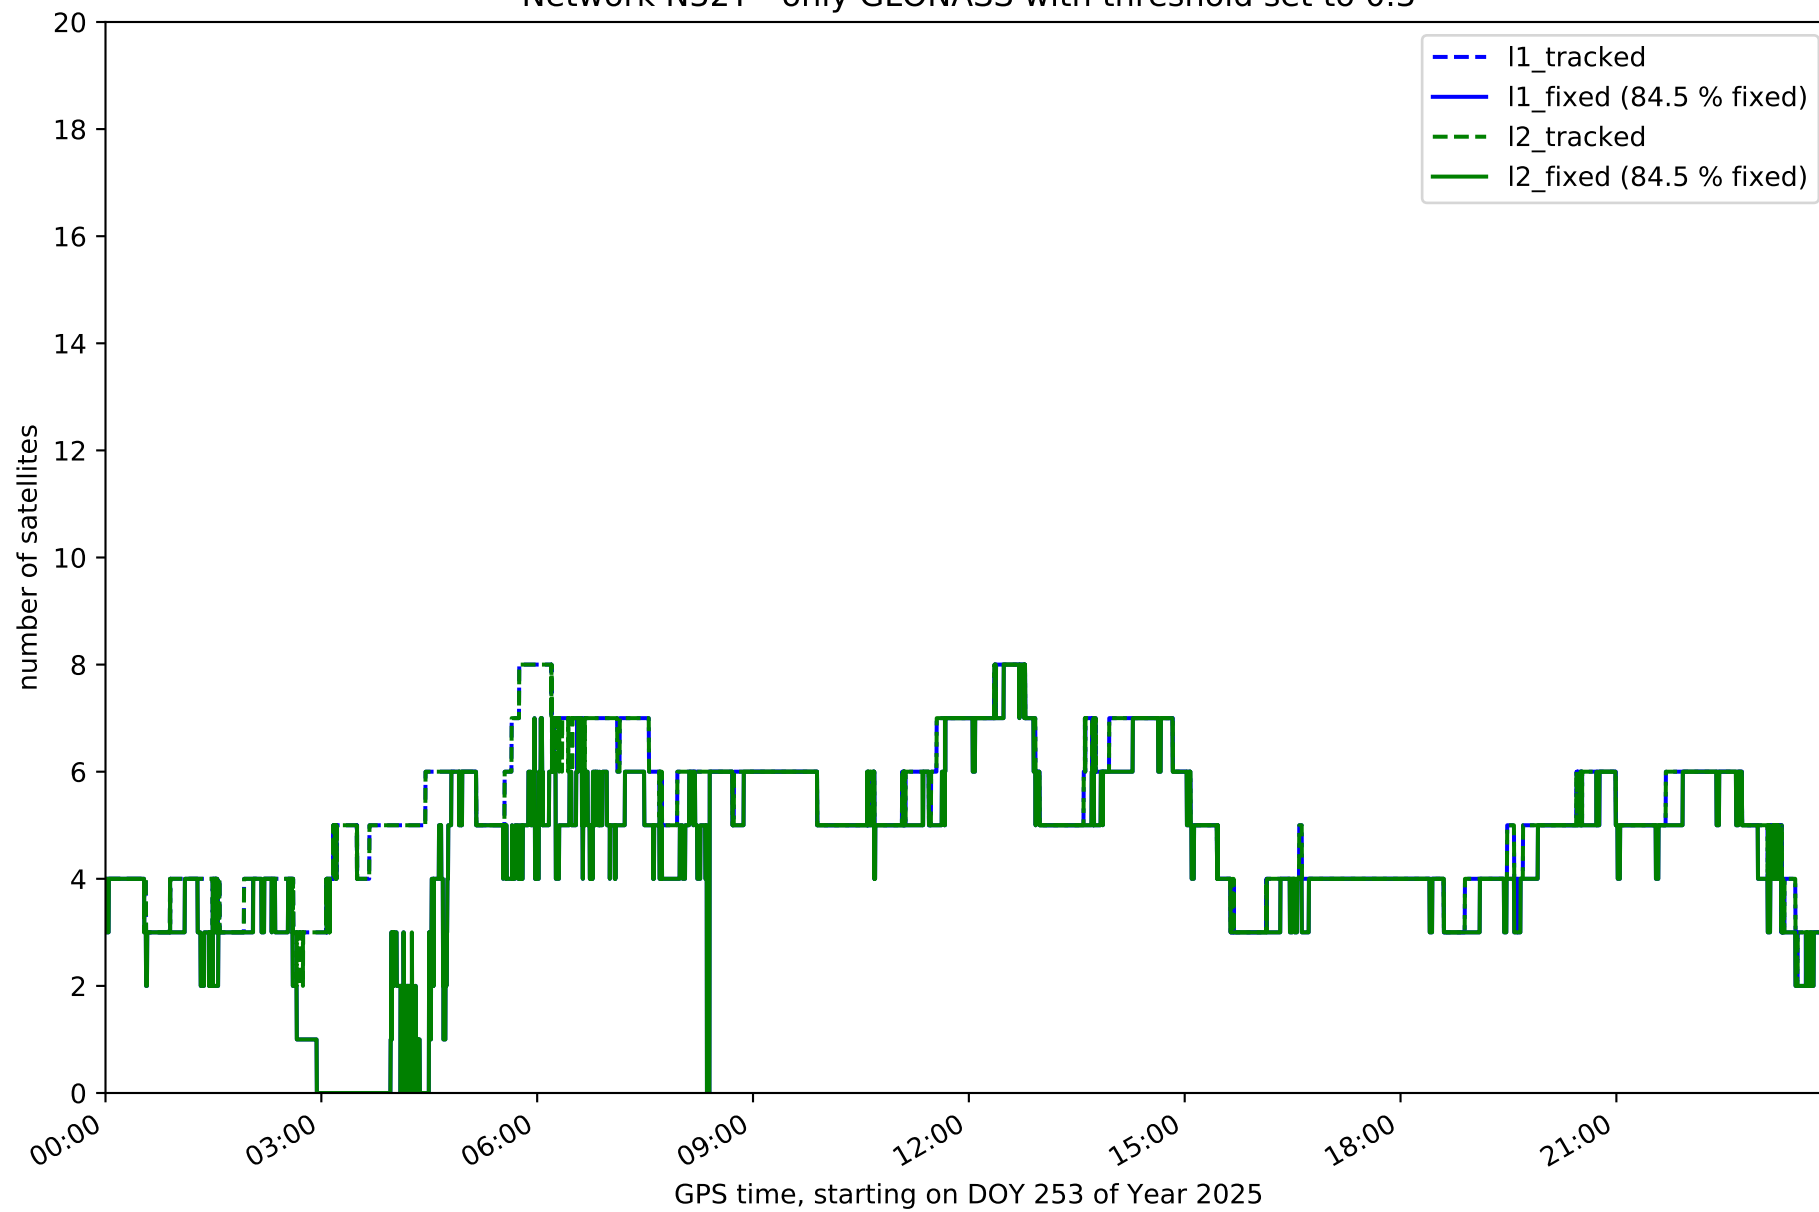


Network N32T - only BDS with threshold set to 0.3

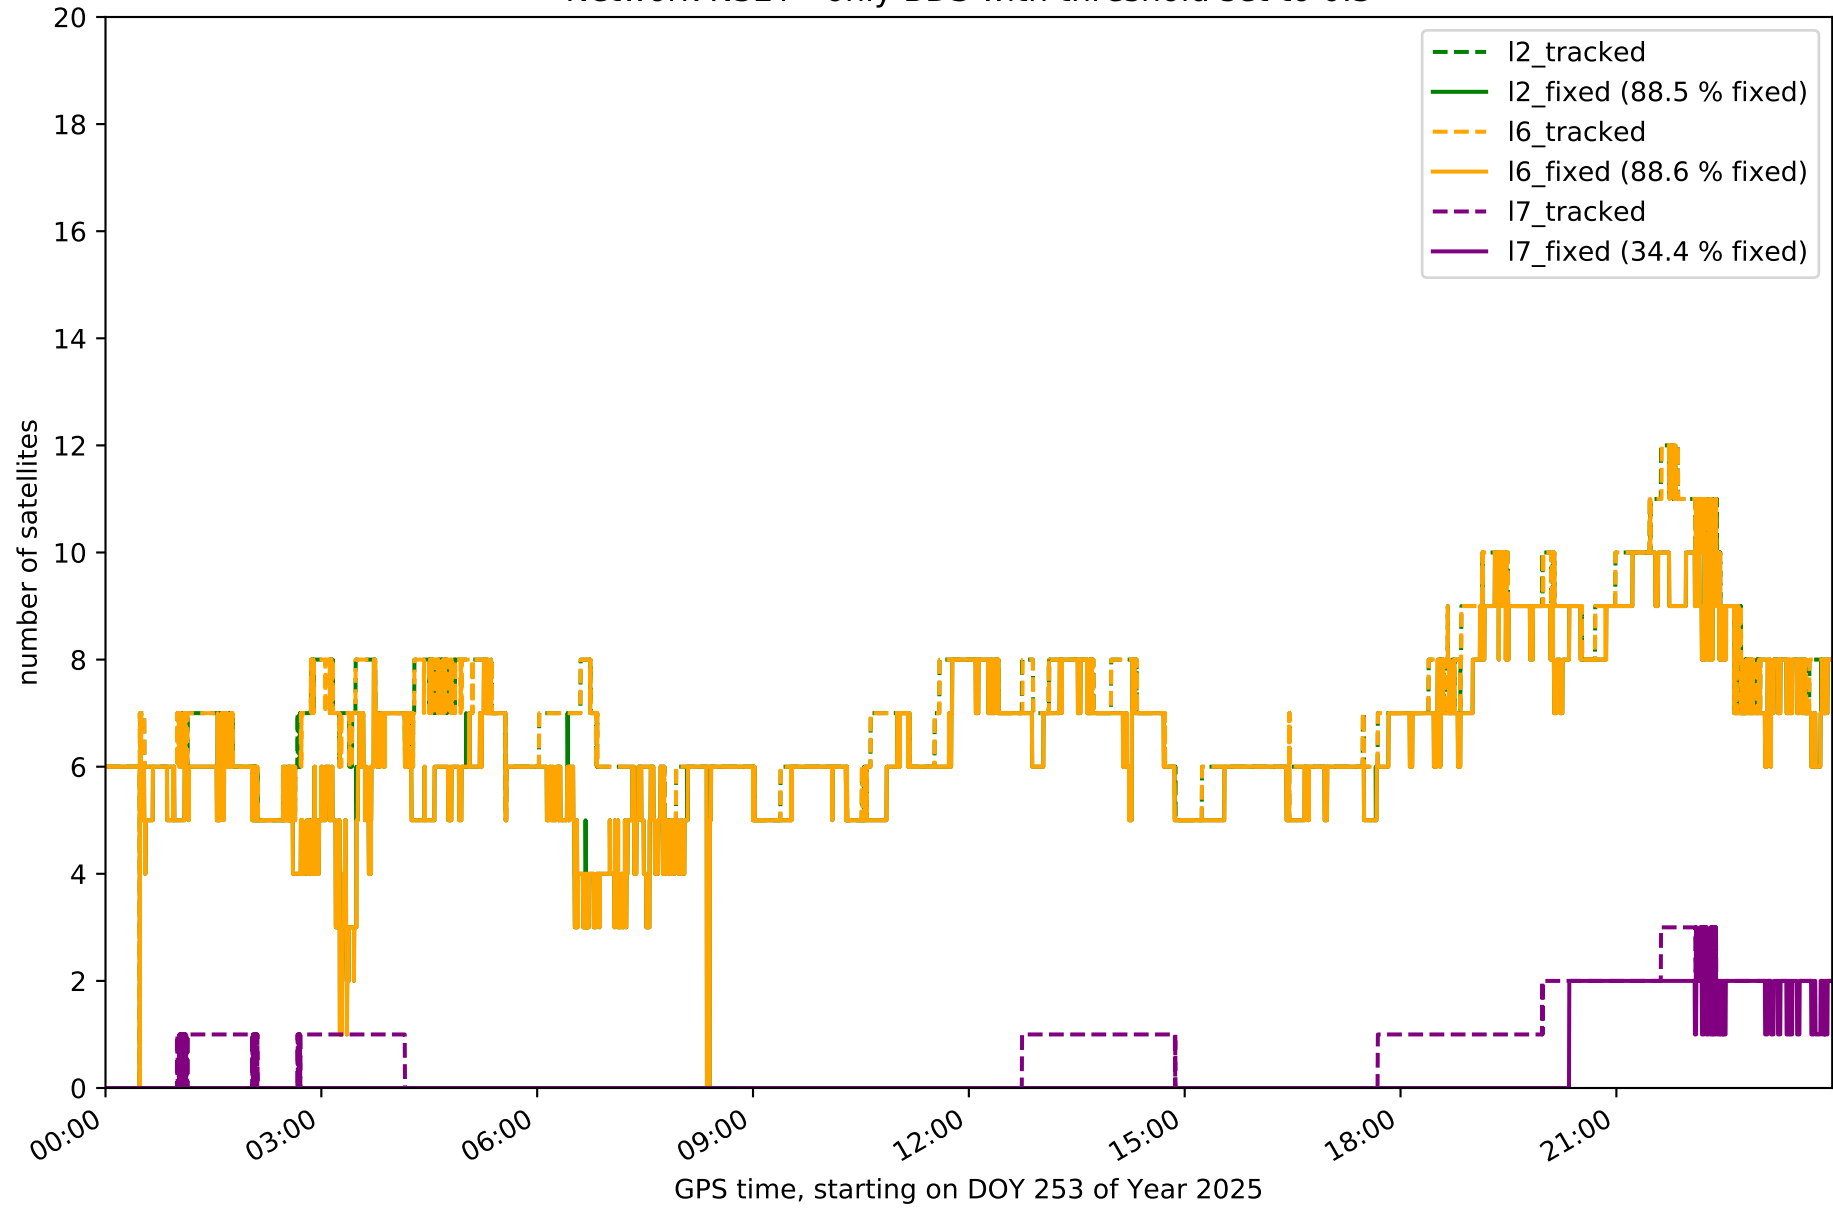


Network N32T - only Galileo with threshold set to 0.3

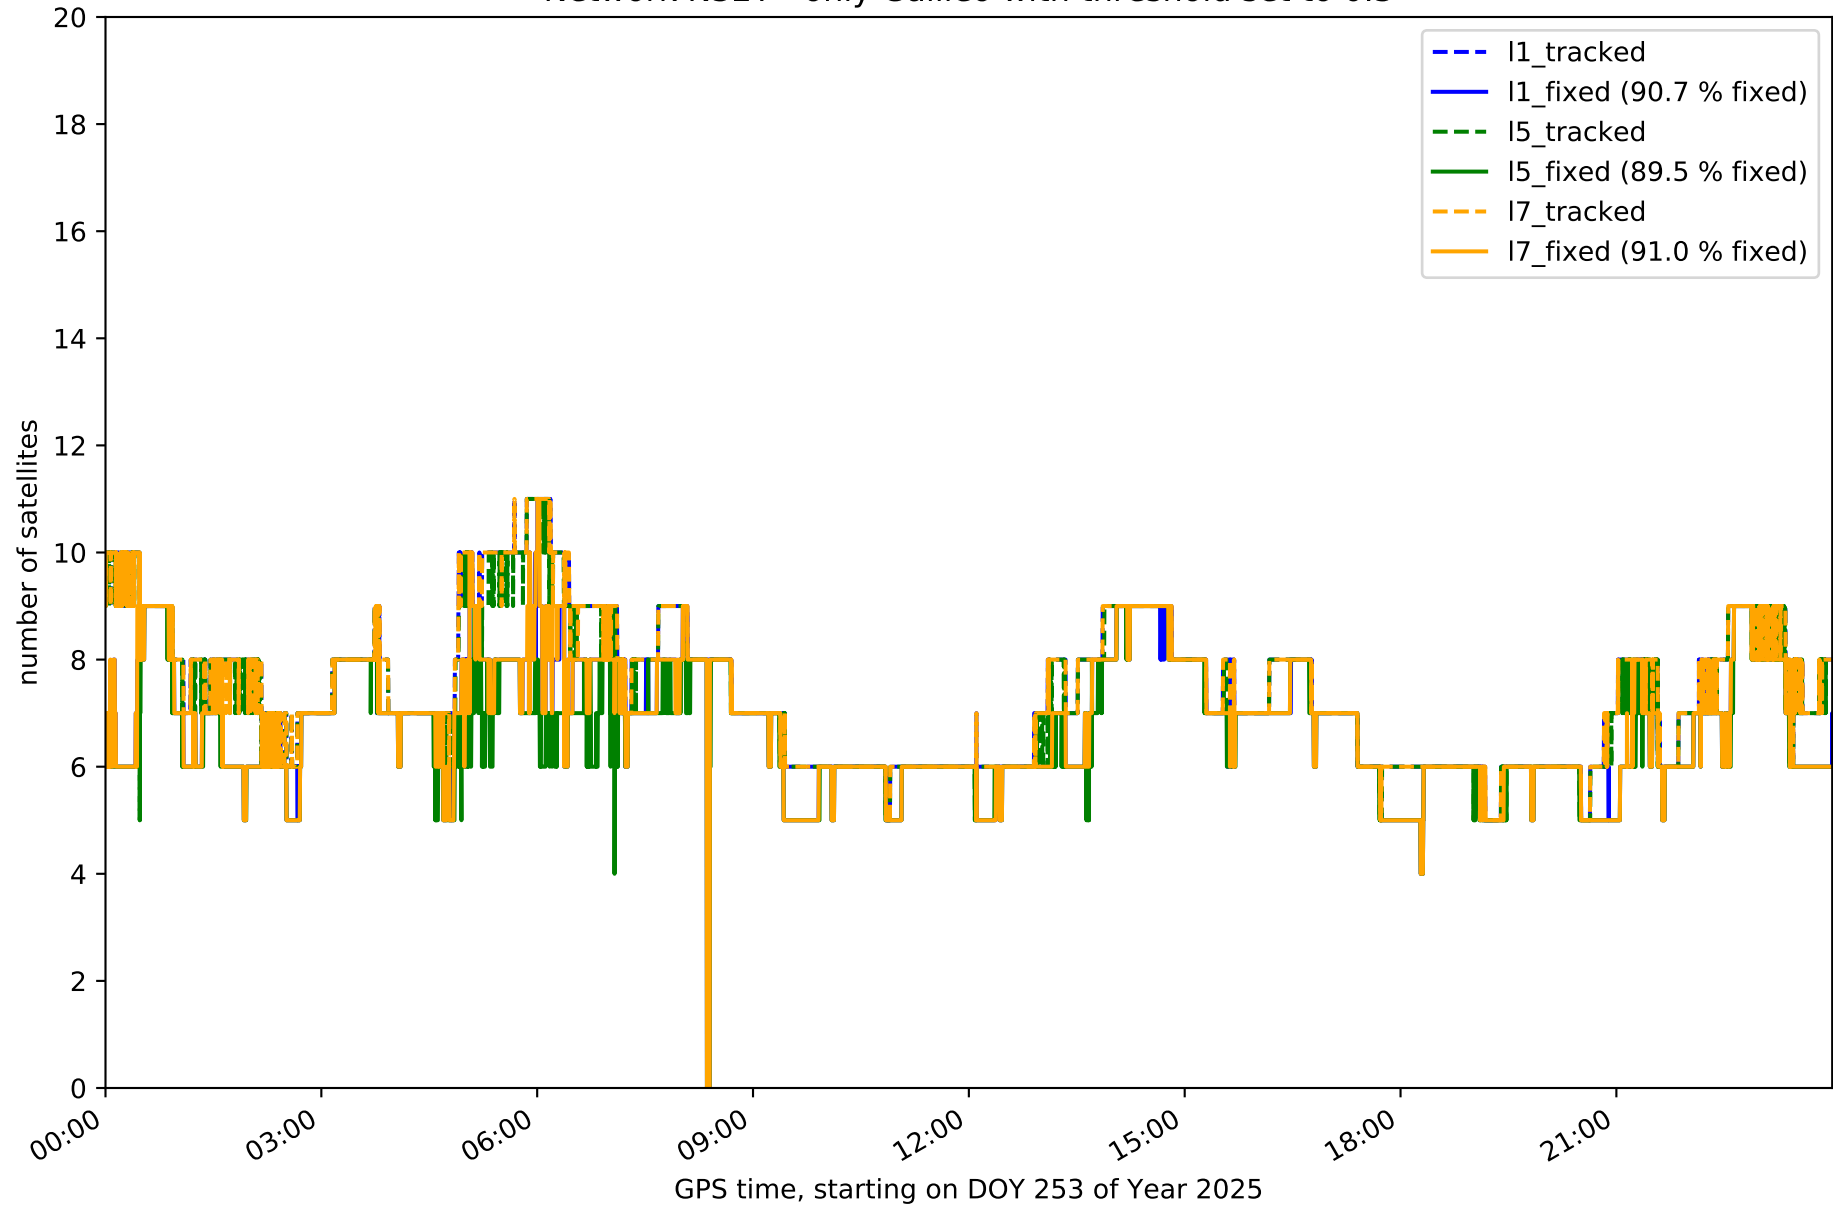


Station EH01 in network N32T

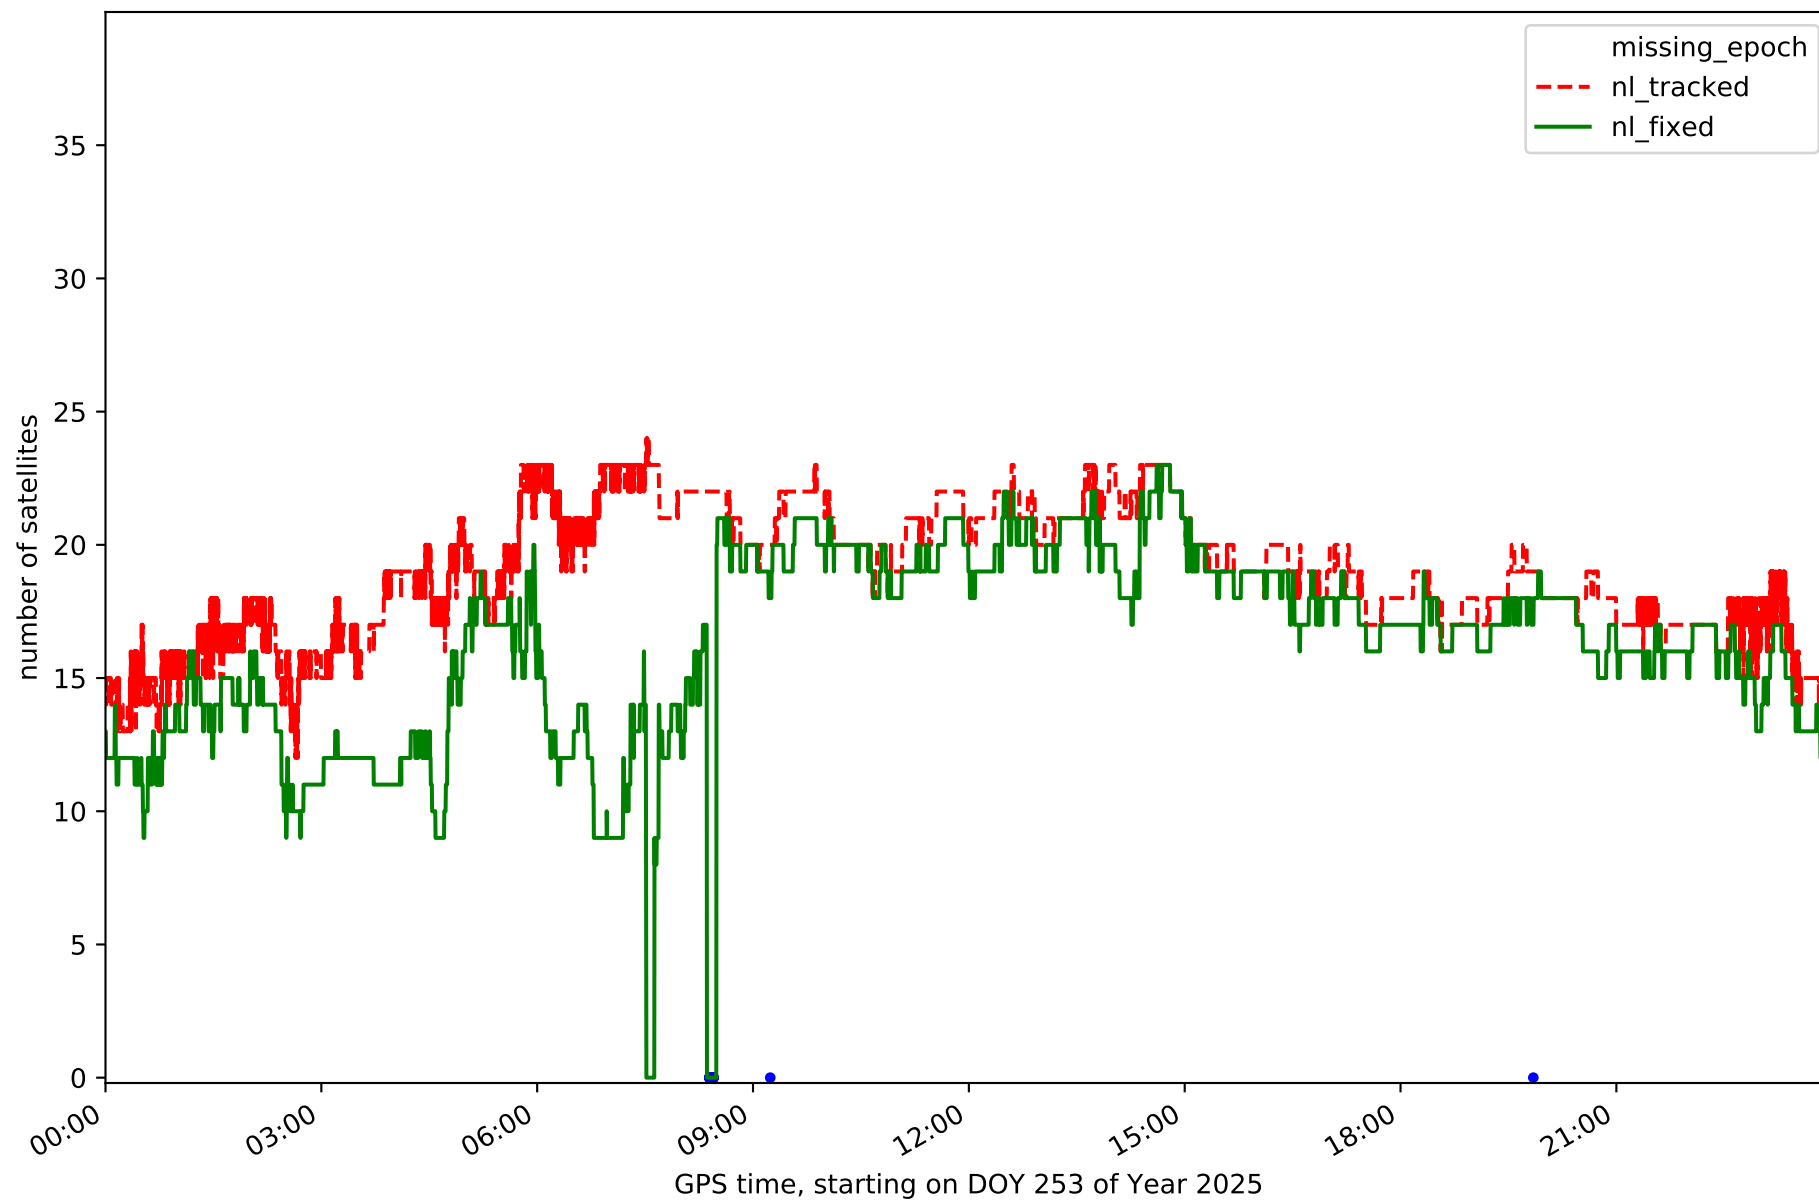


Station EH02 in network N32T

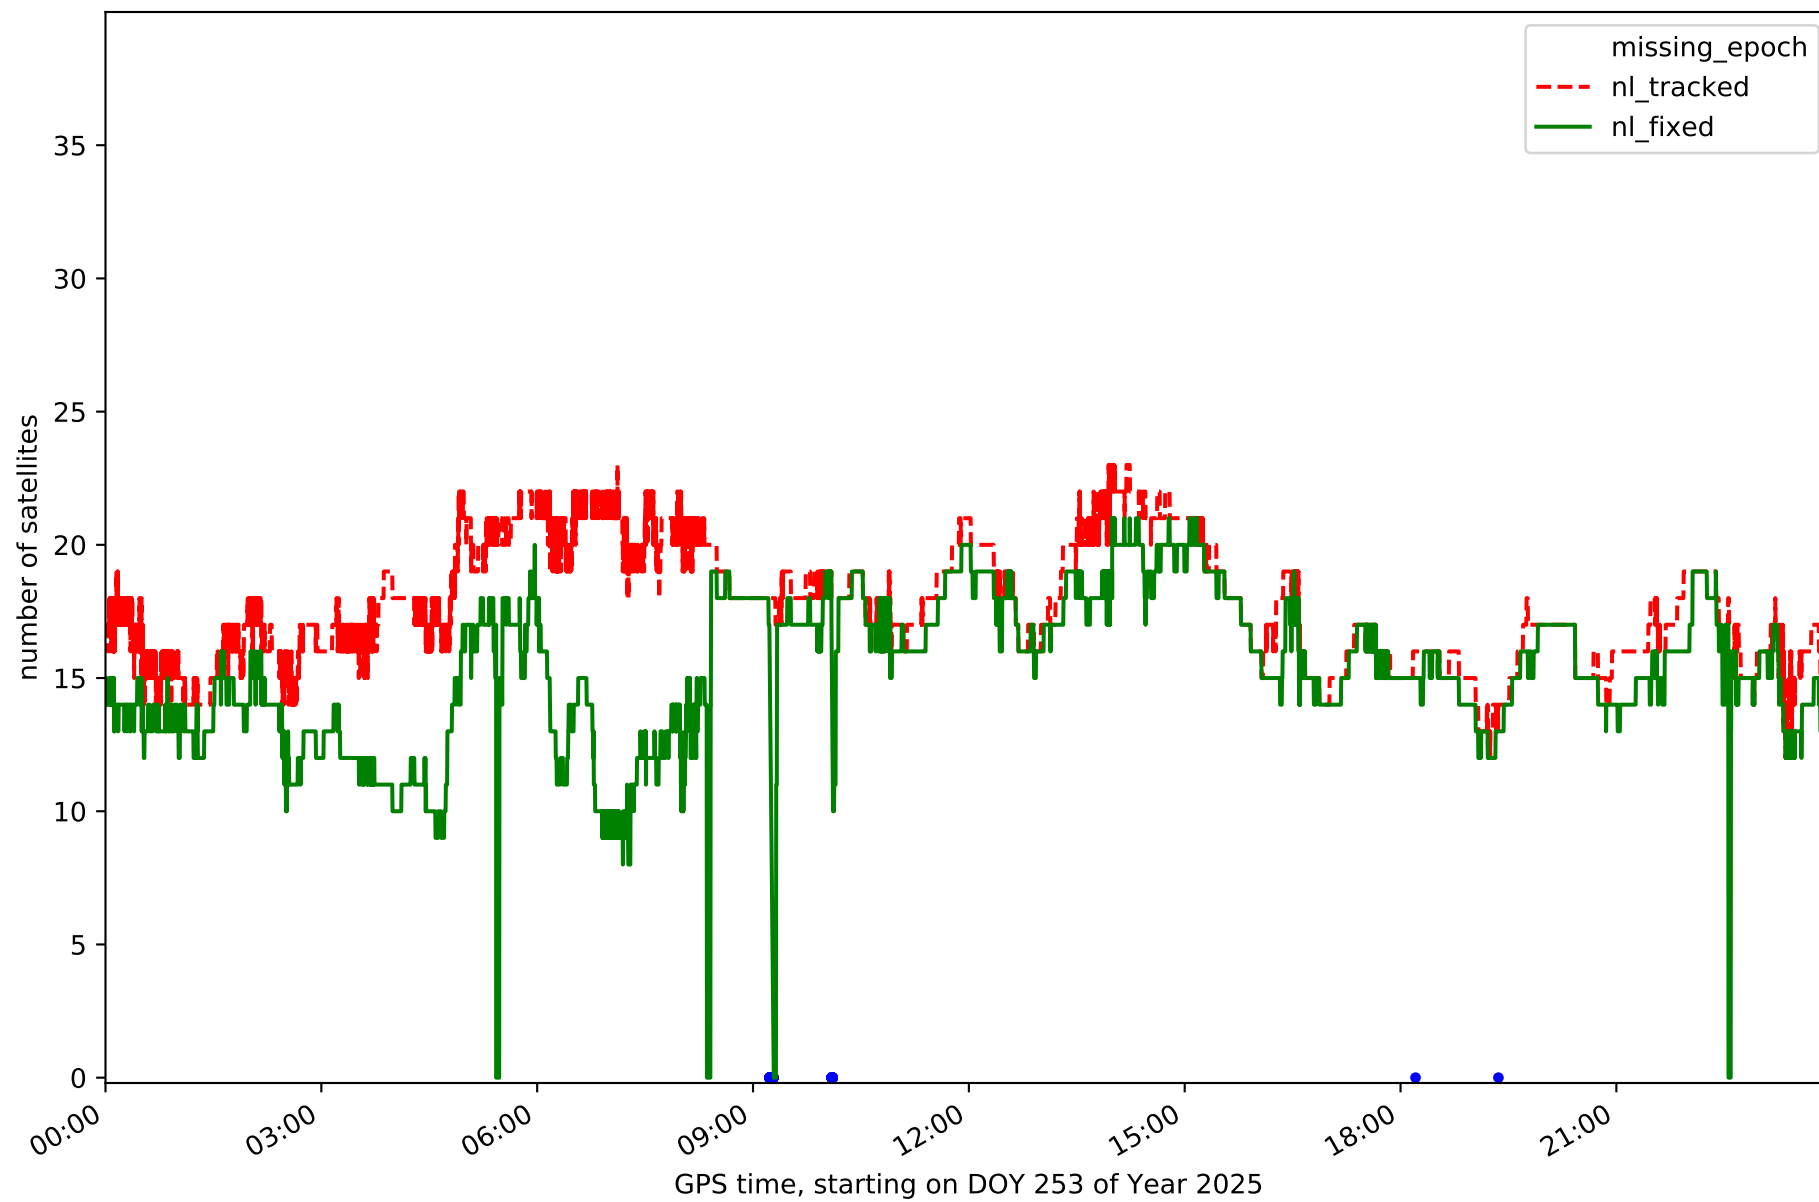


Station GOM1 in network N32T

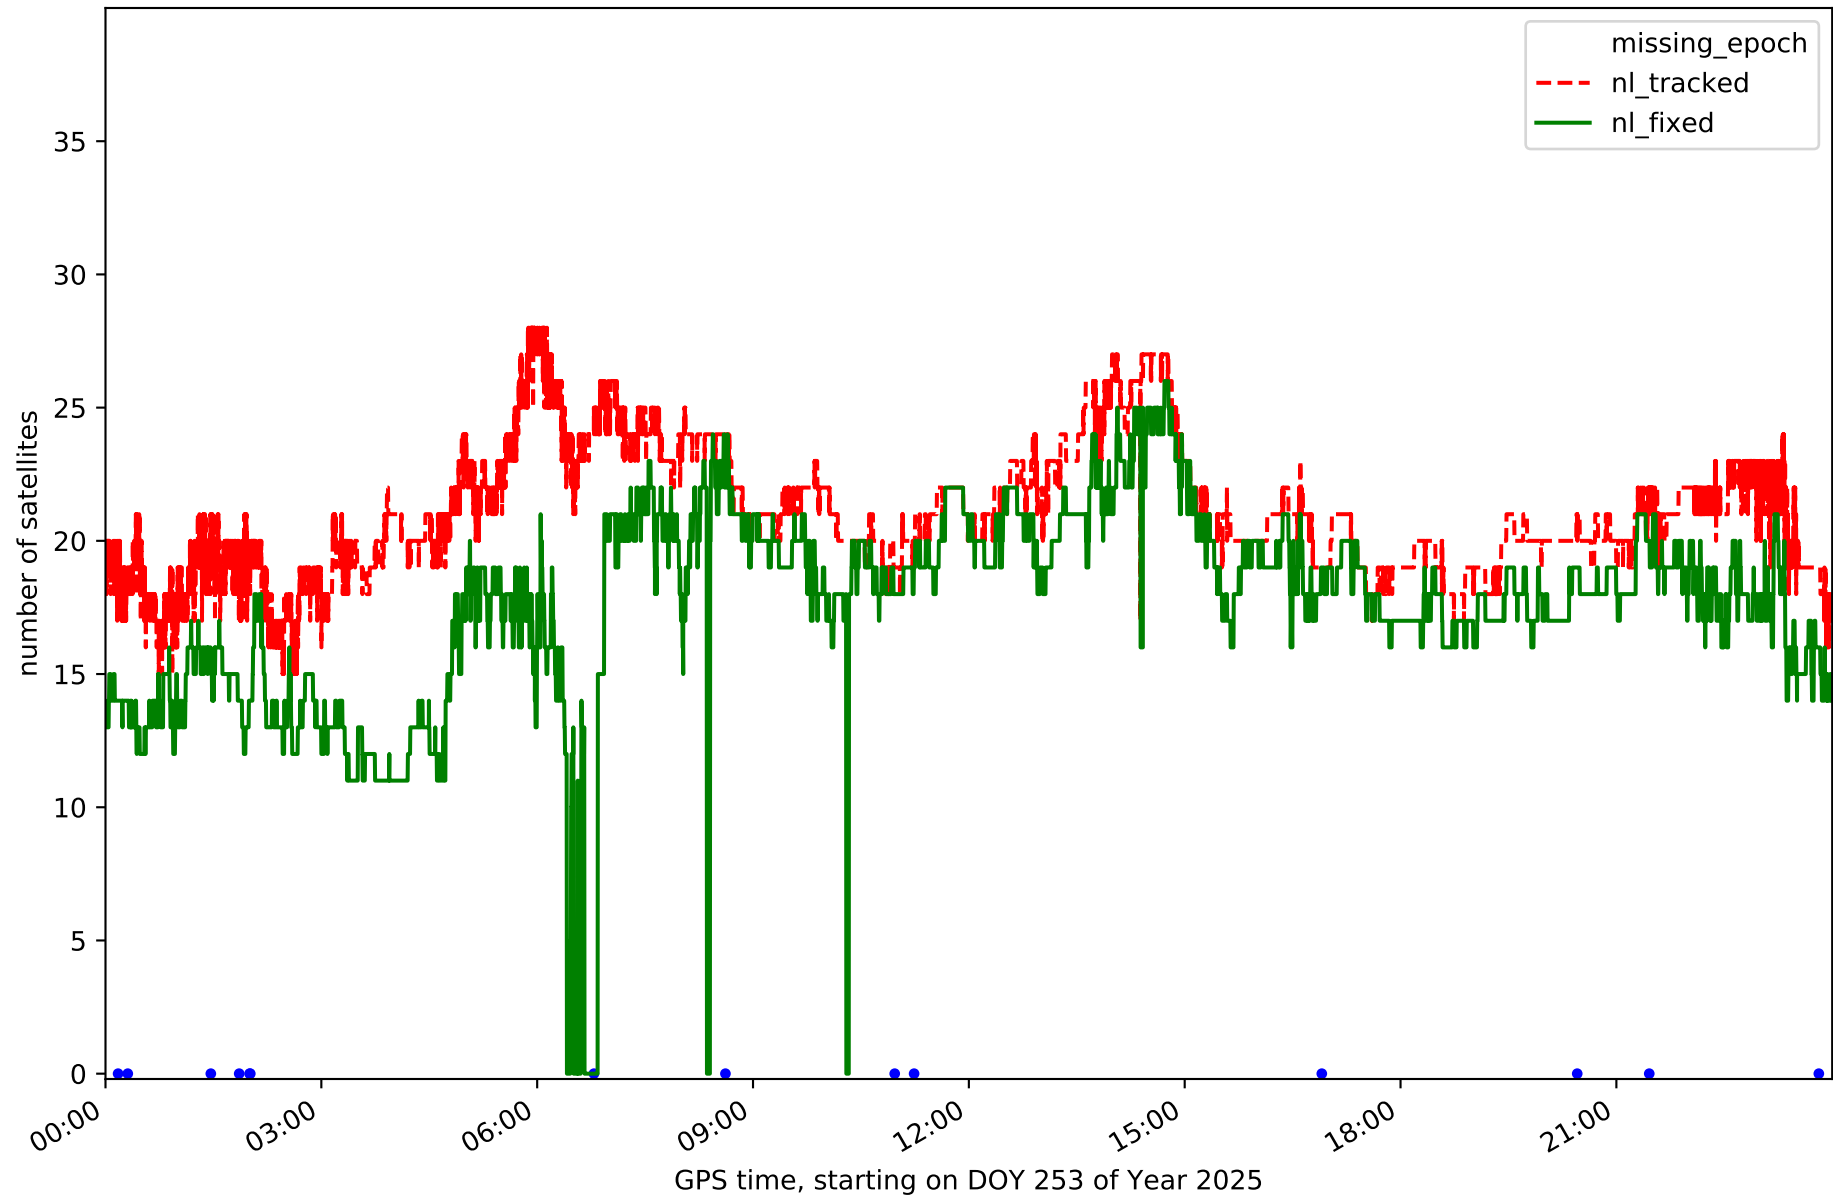


Station IZAN in network N32T

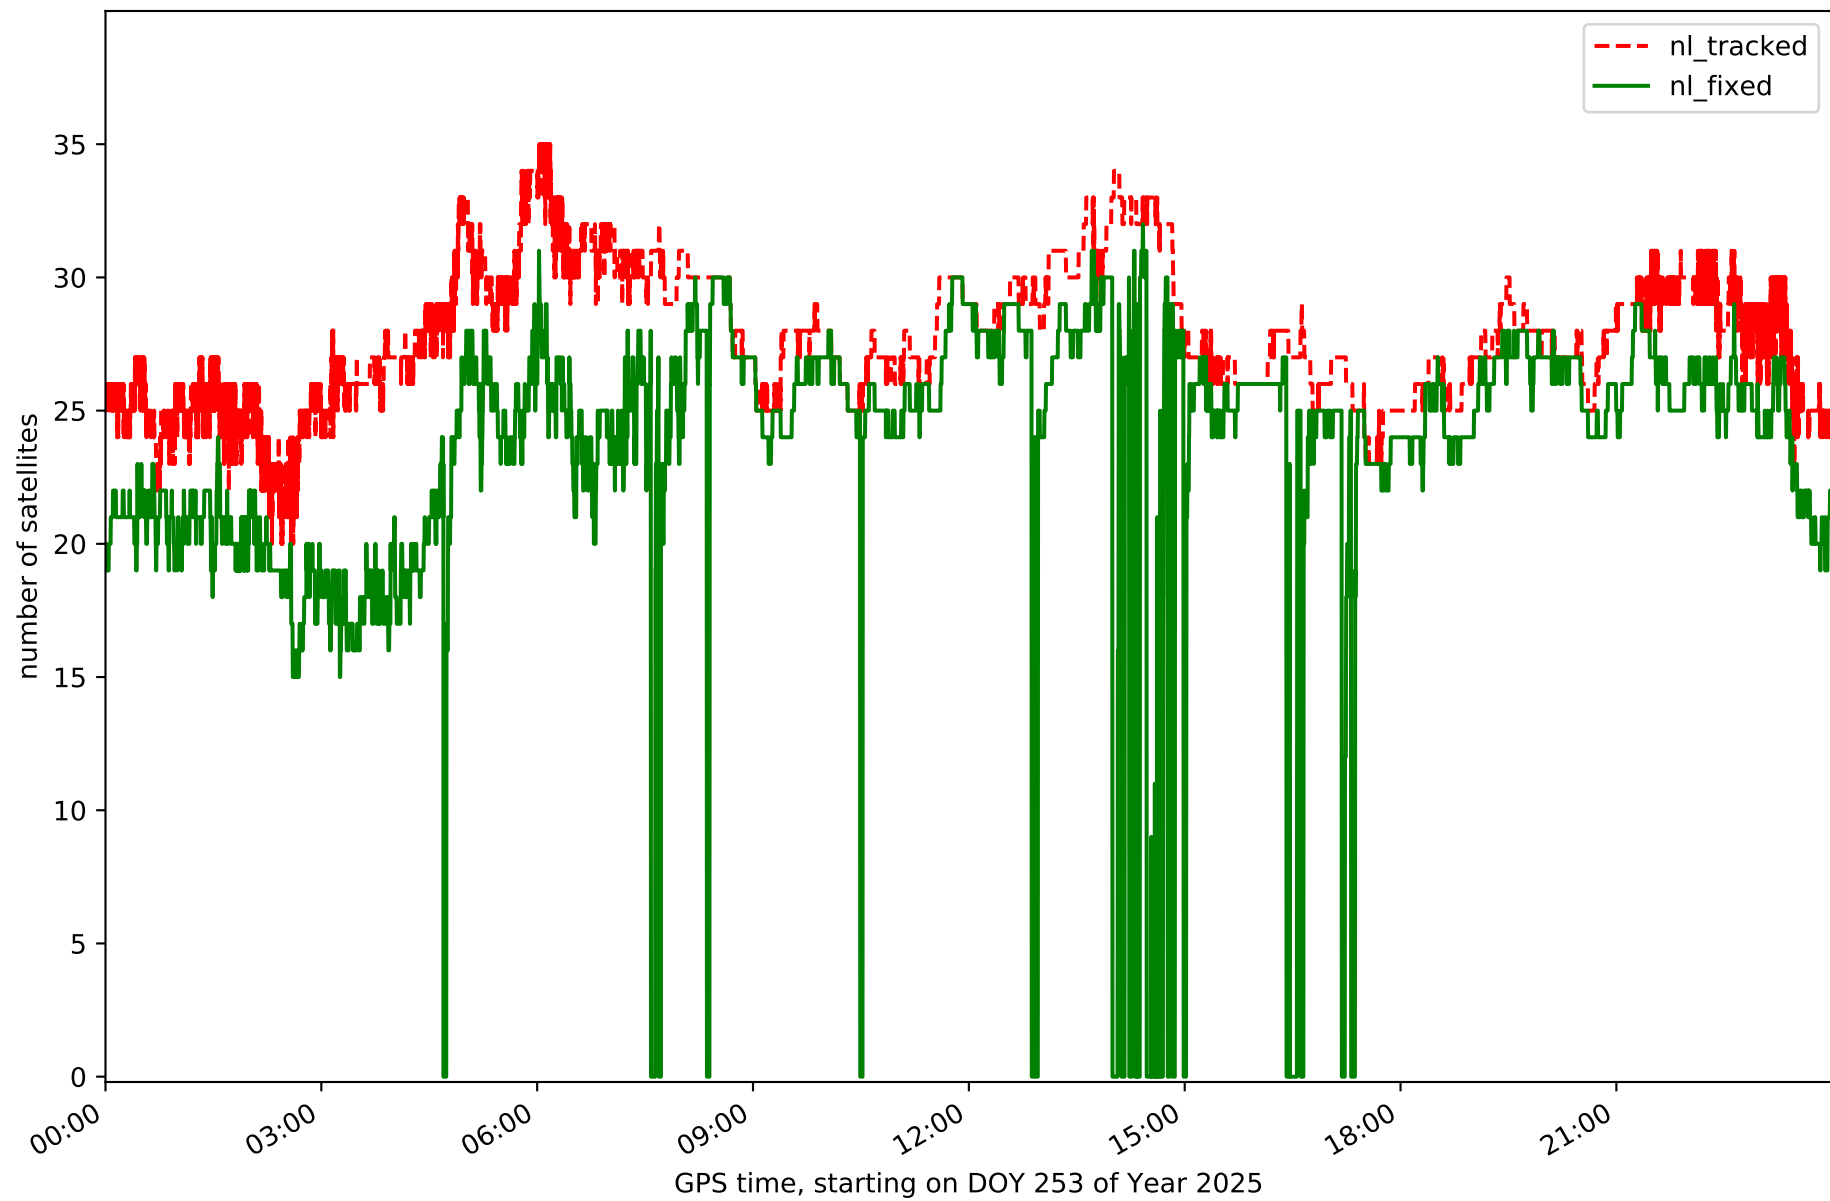


Station LP01 in network N32T

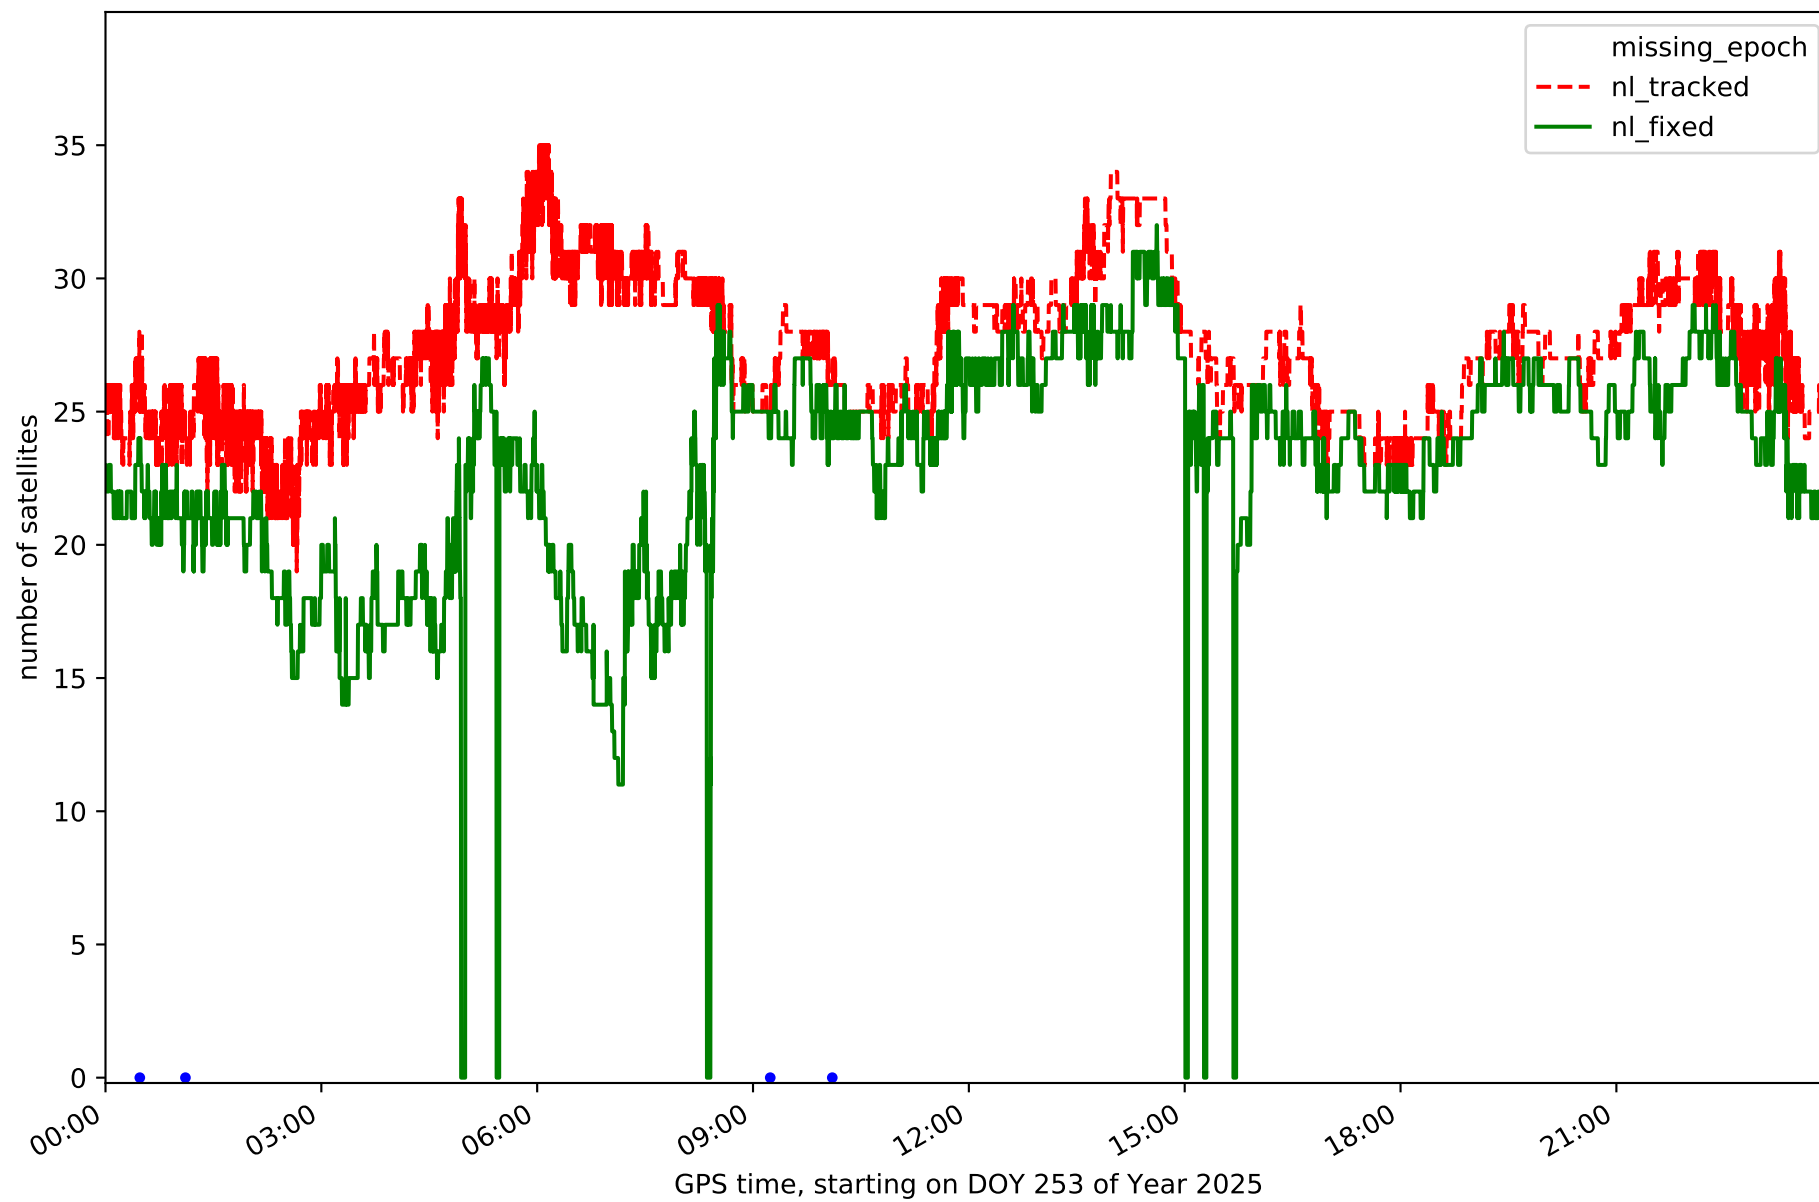


Station LP03 in network N32T

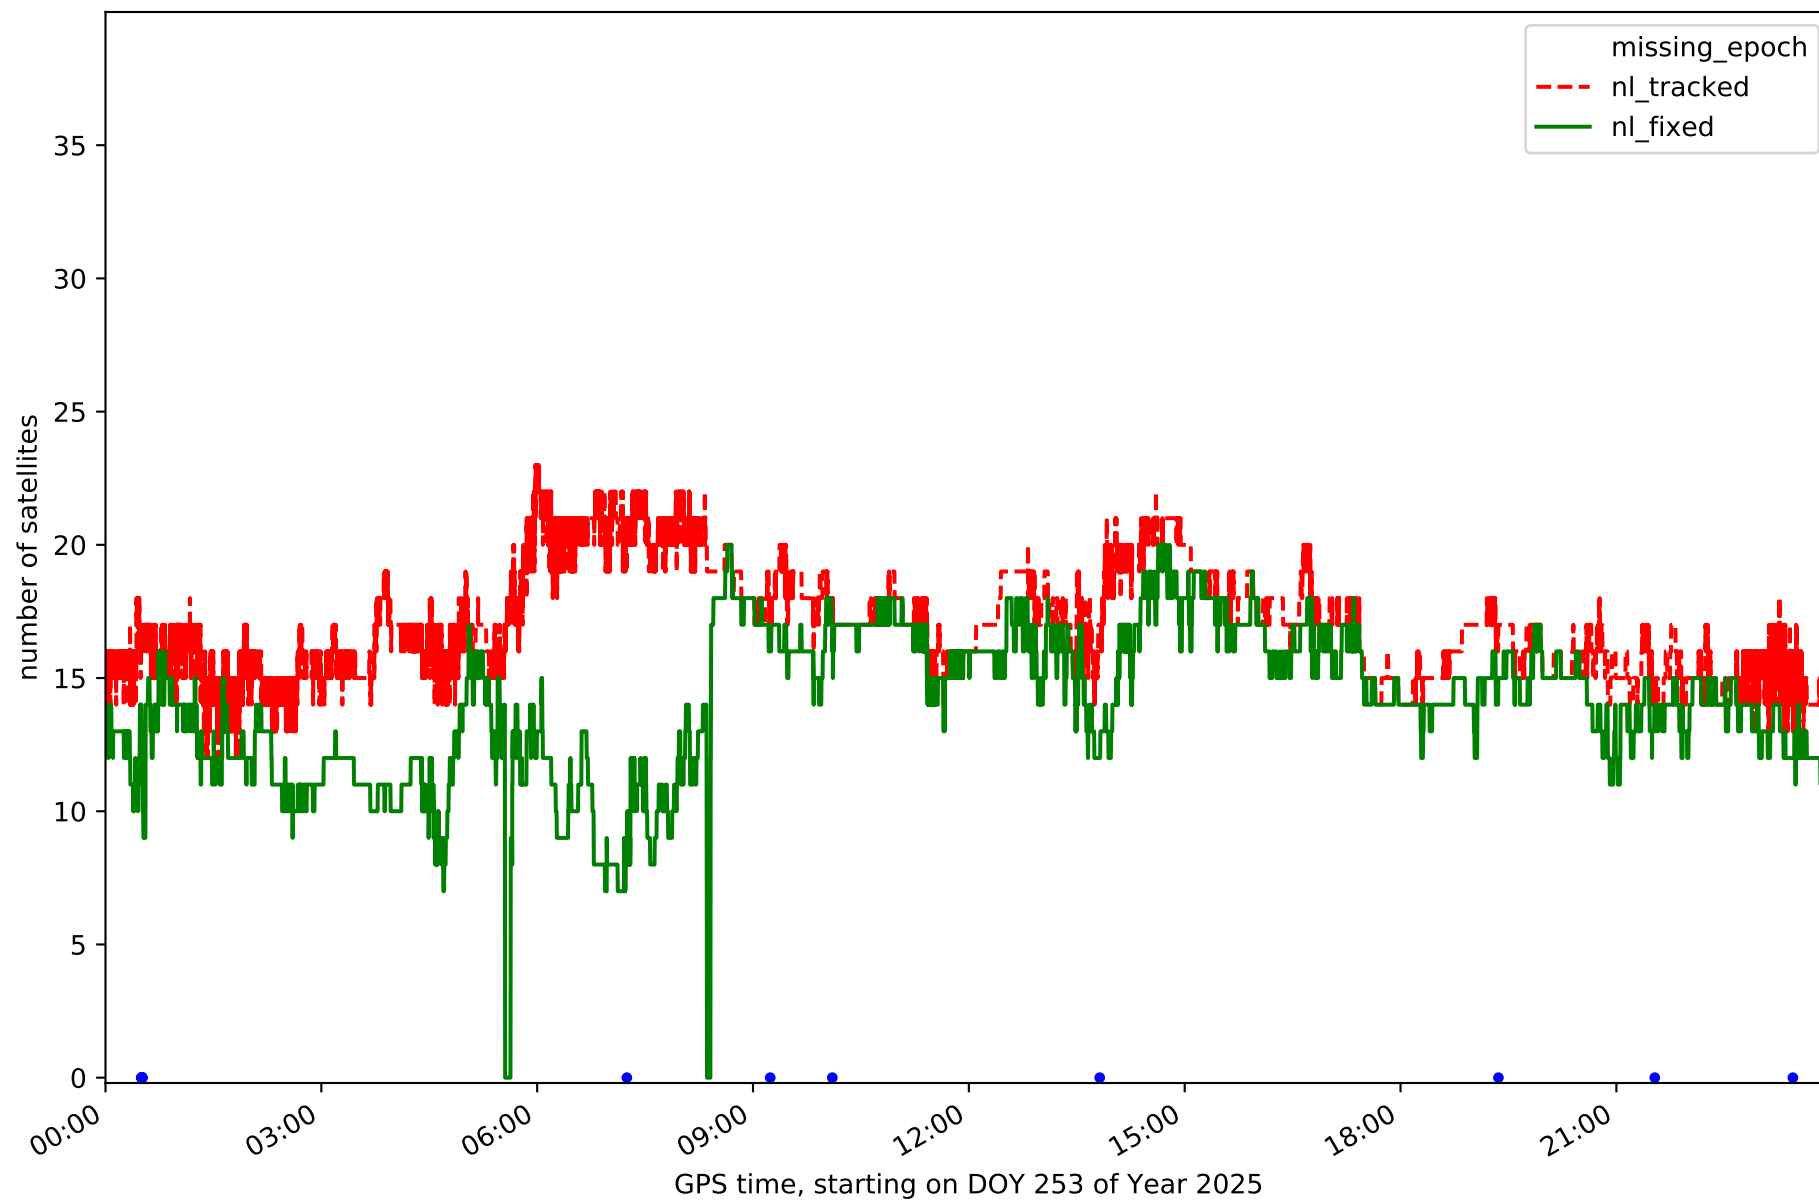


Station LPAL in network N32T

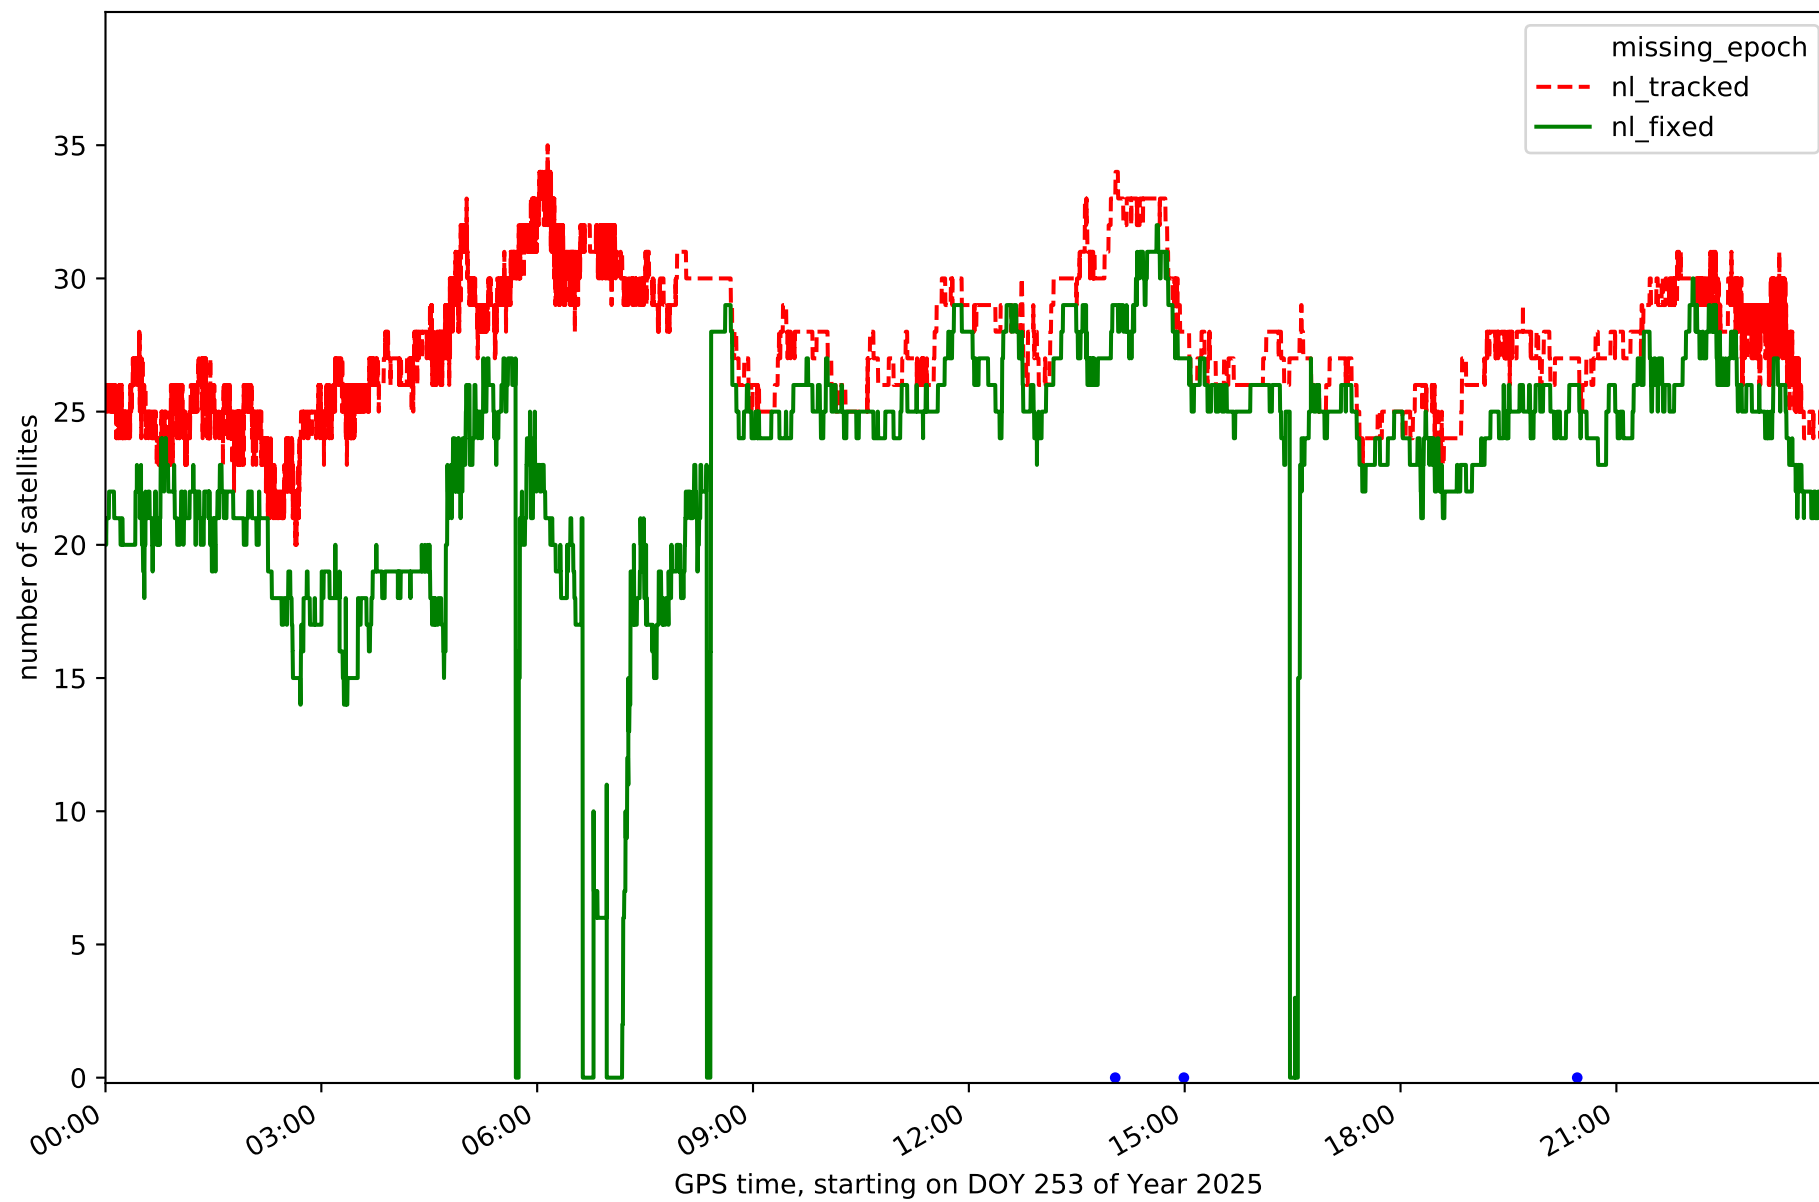


Station LRES in network N32T

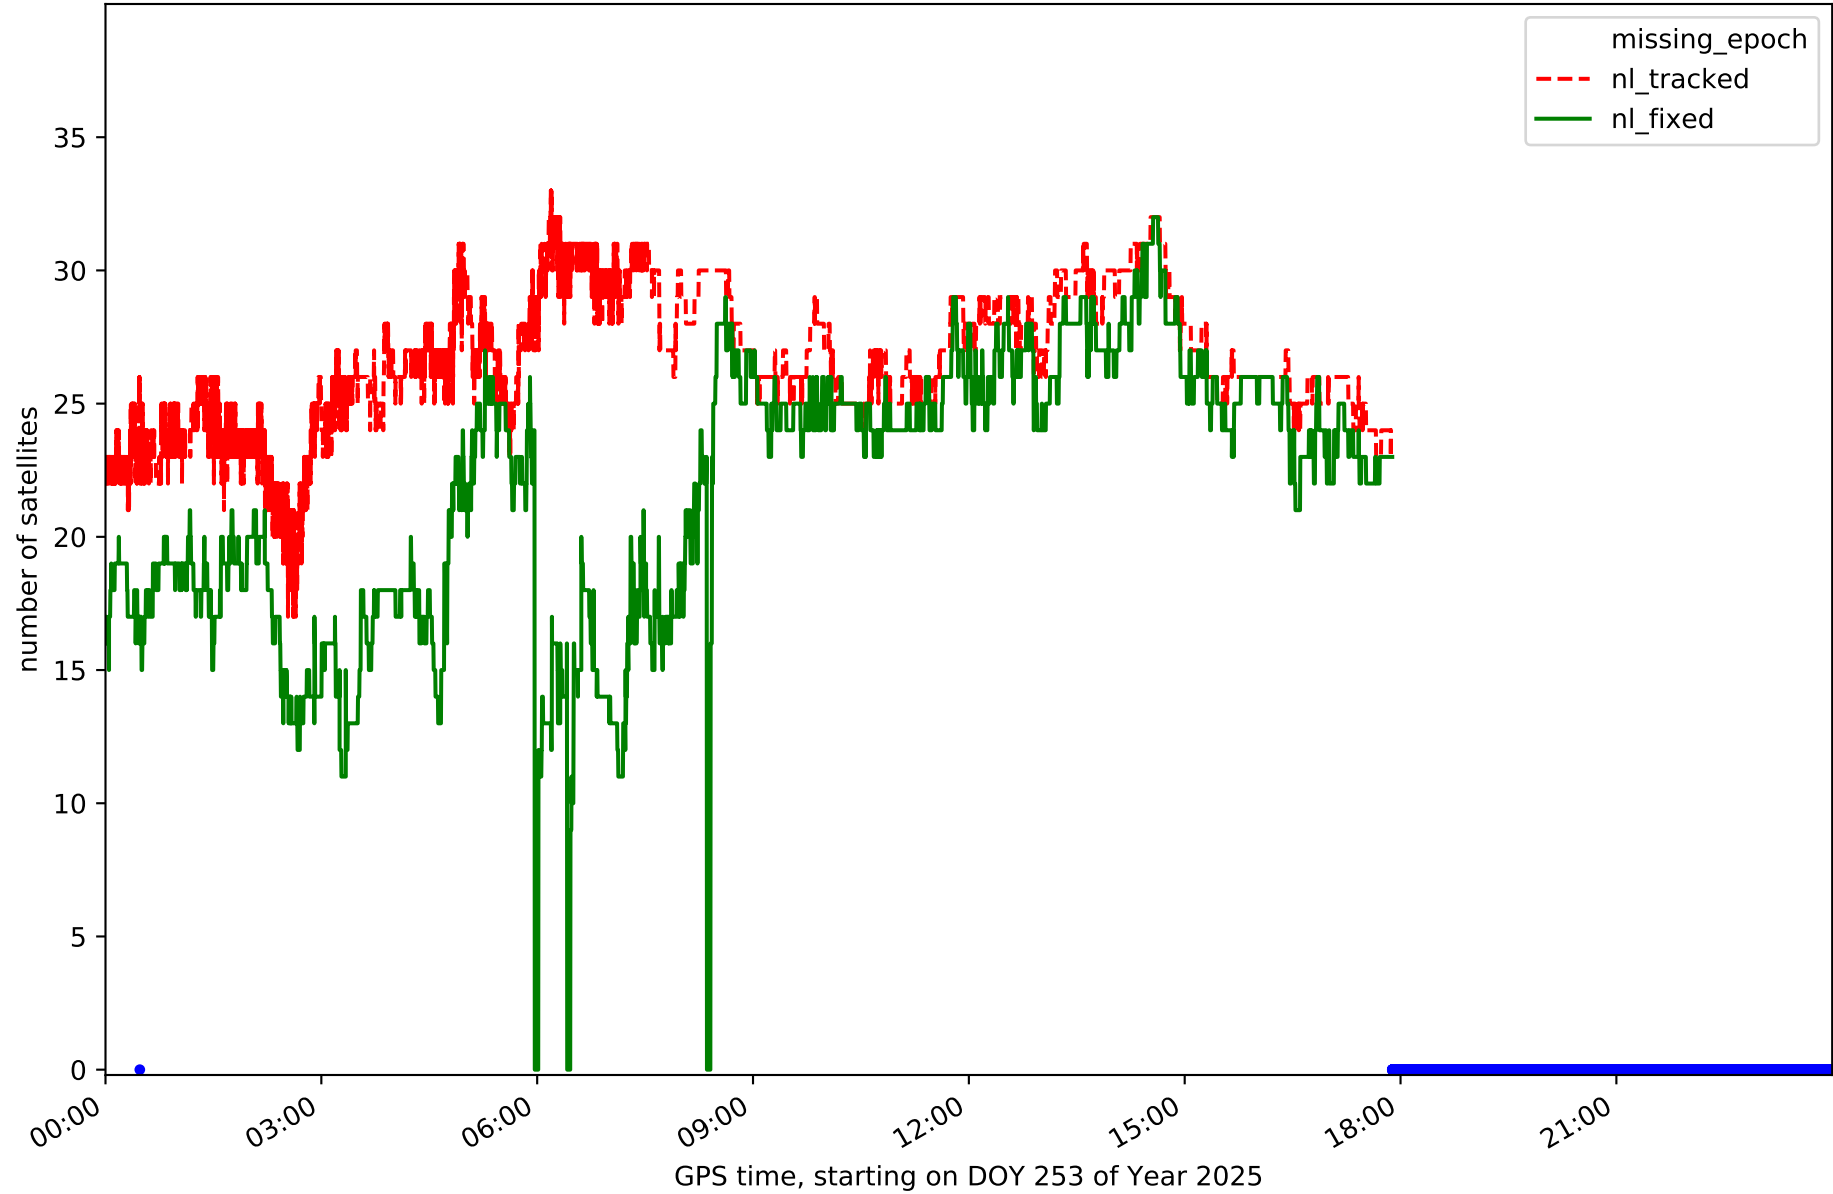


Station TN01 in network N32T

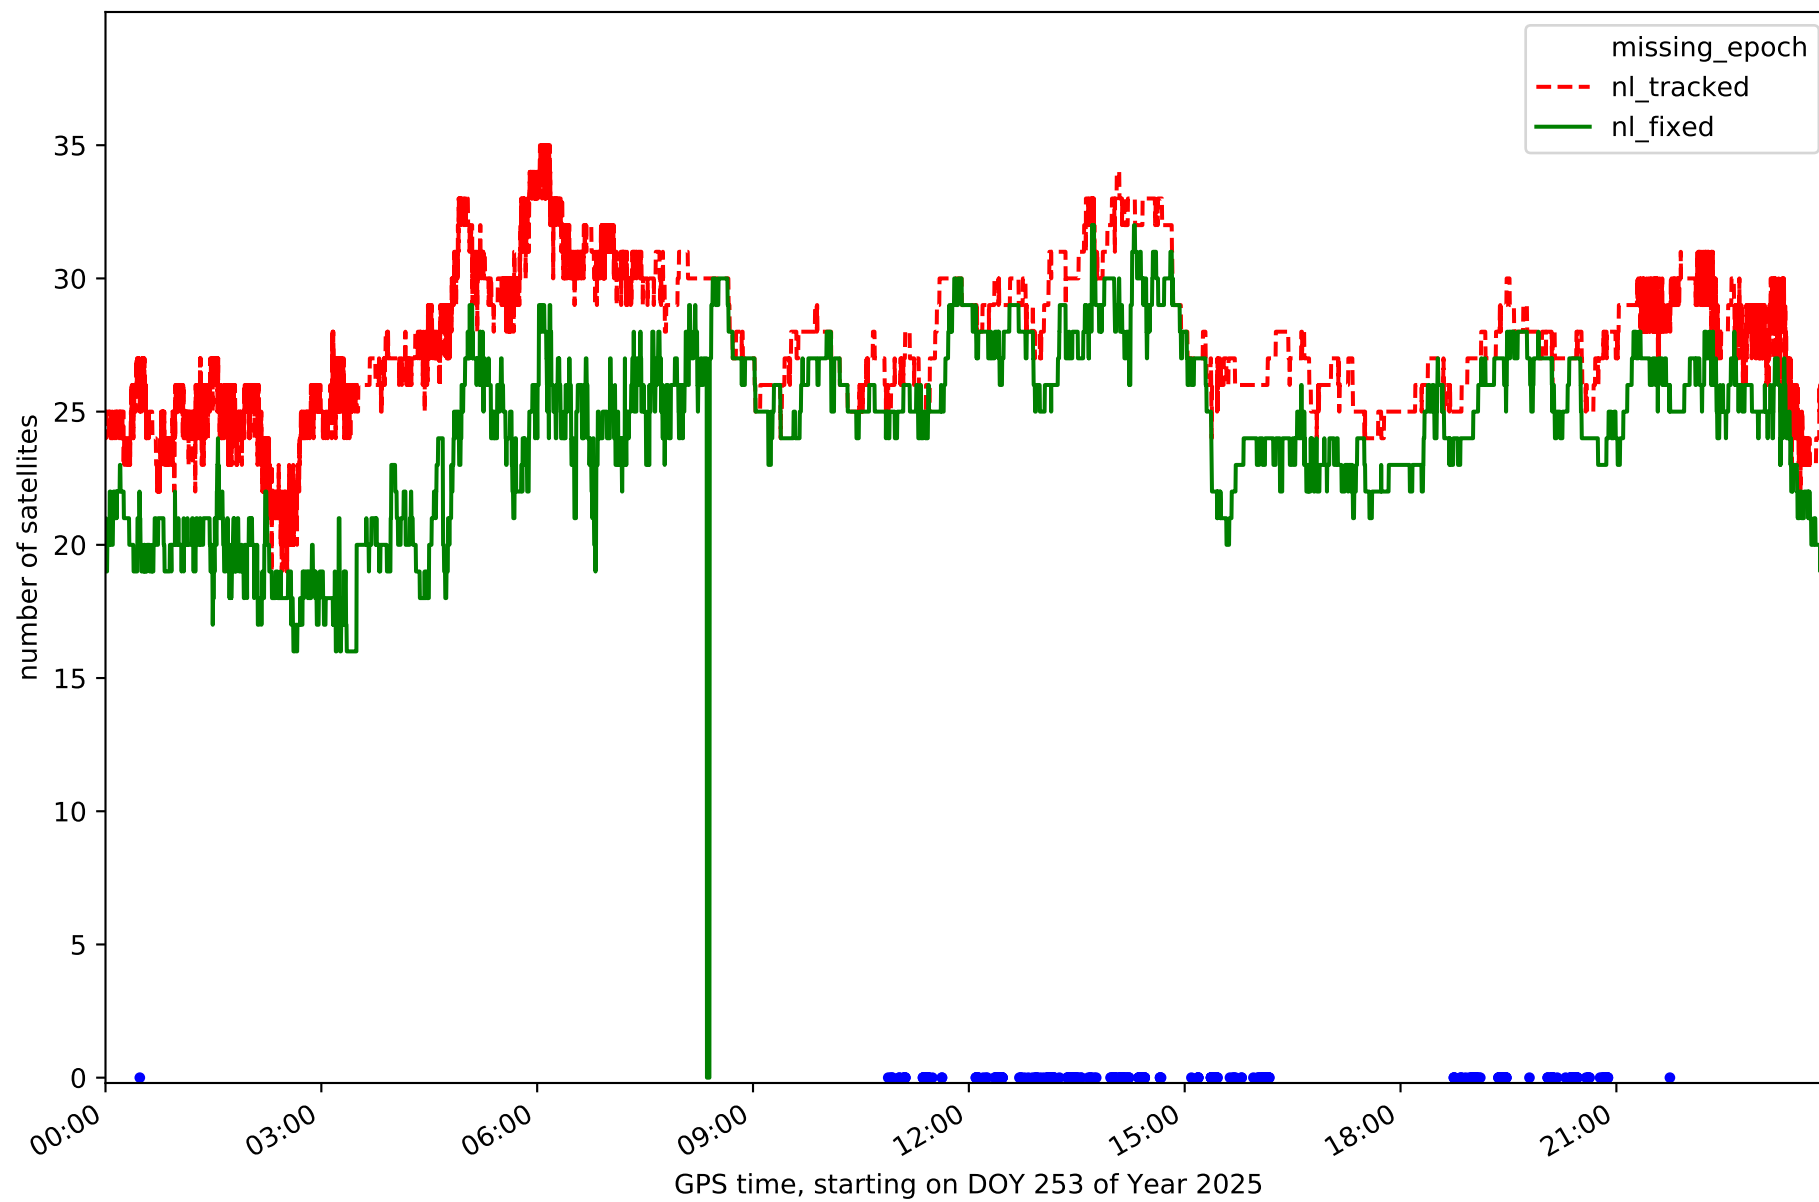


Station TN02 in network N32T

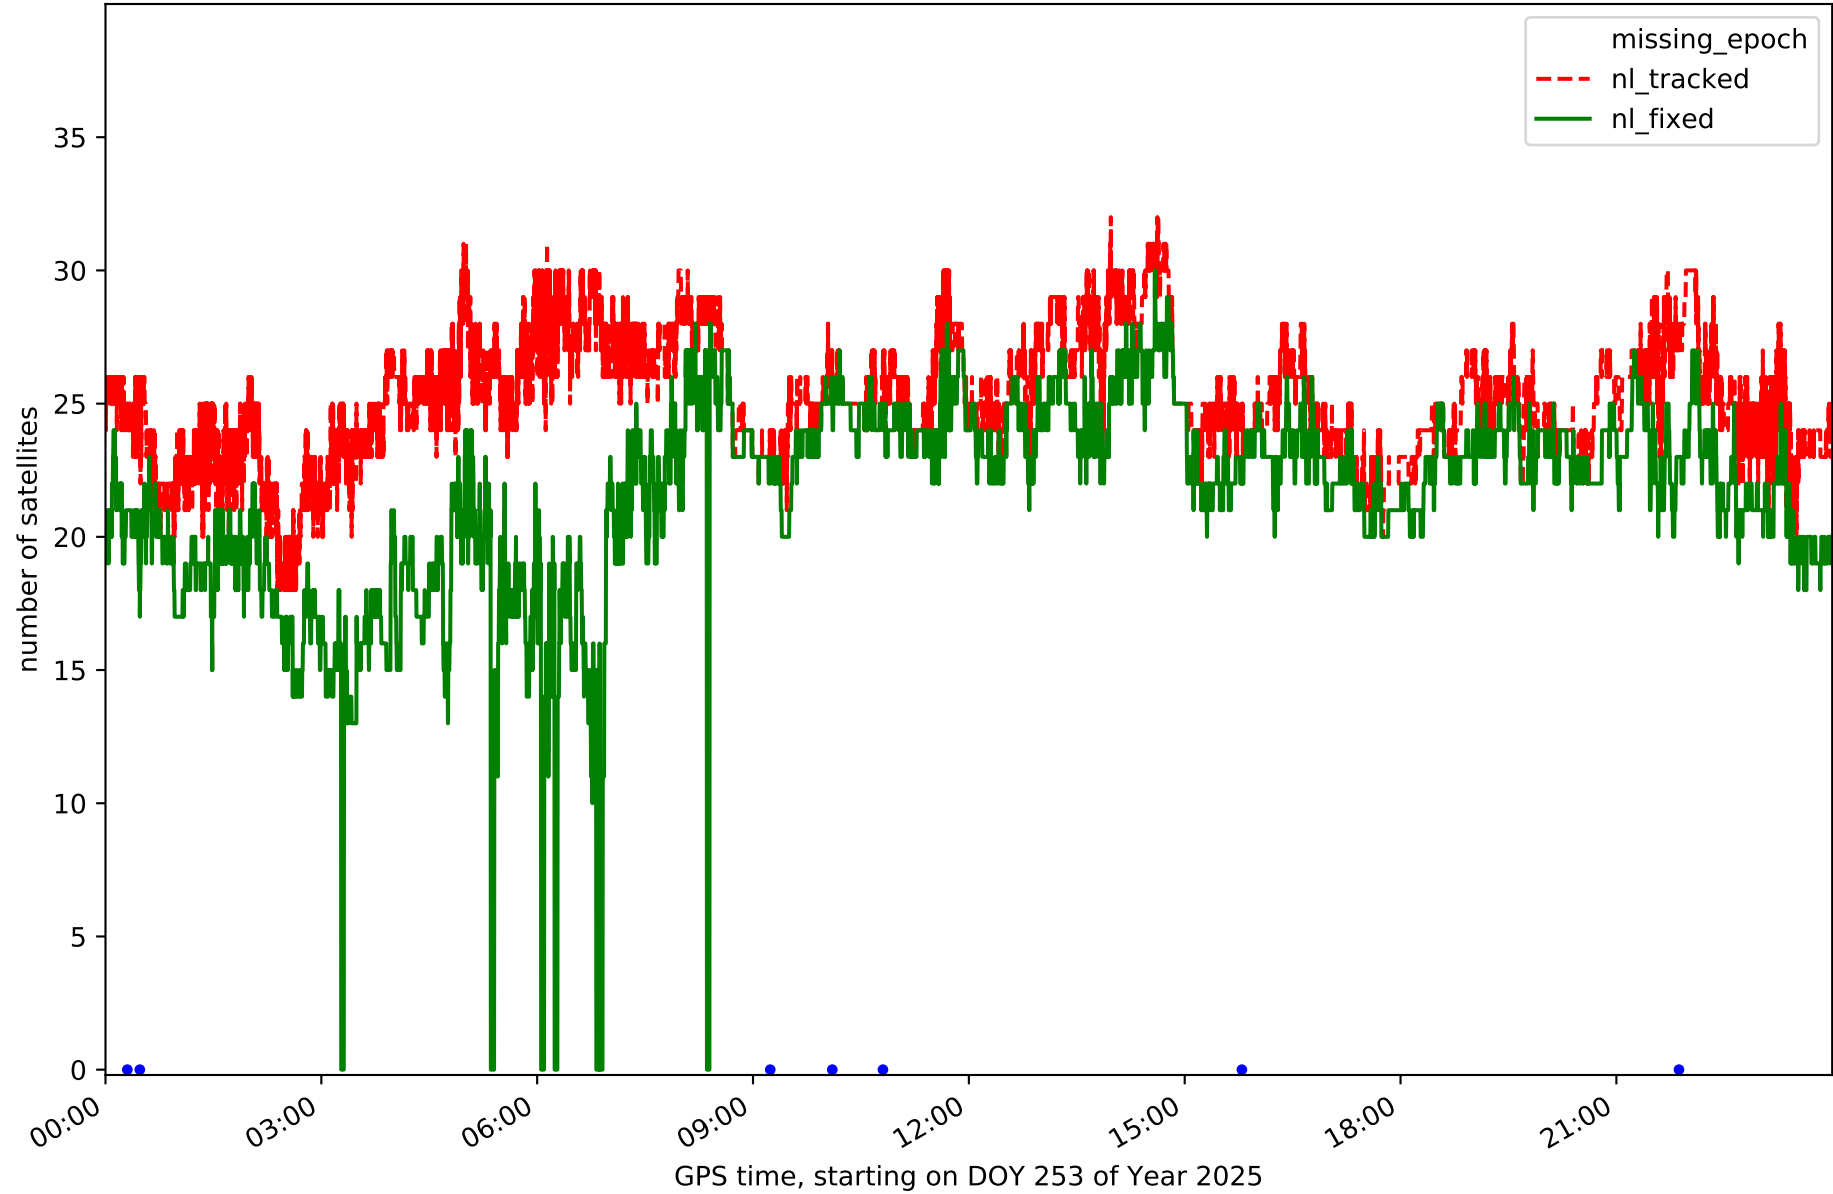


Station TN03 in network N32T

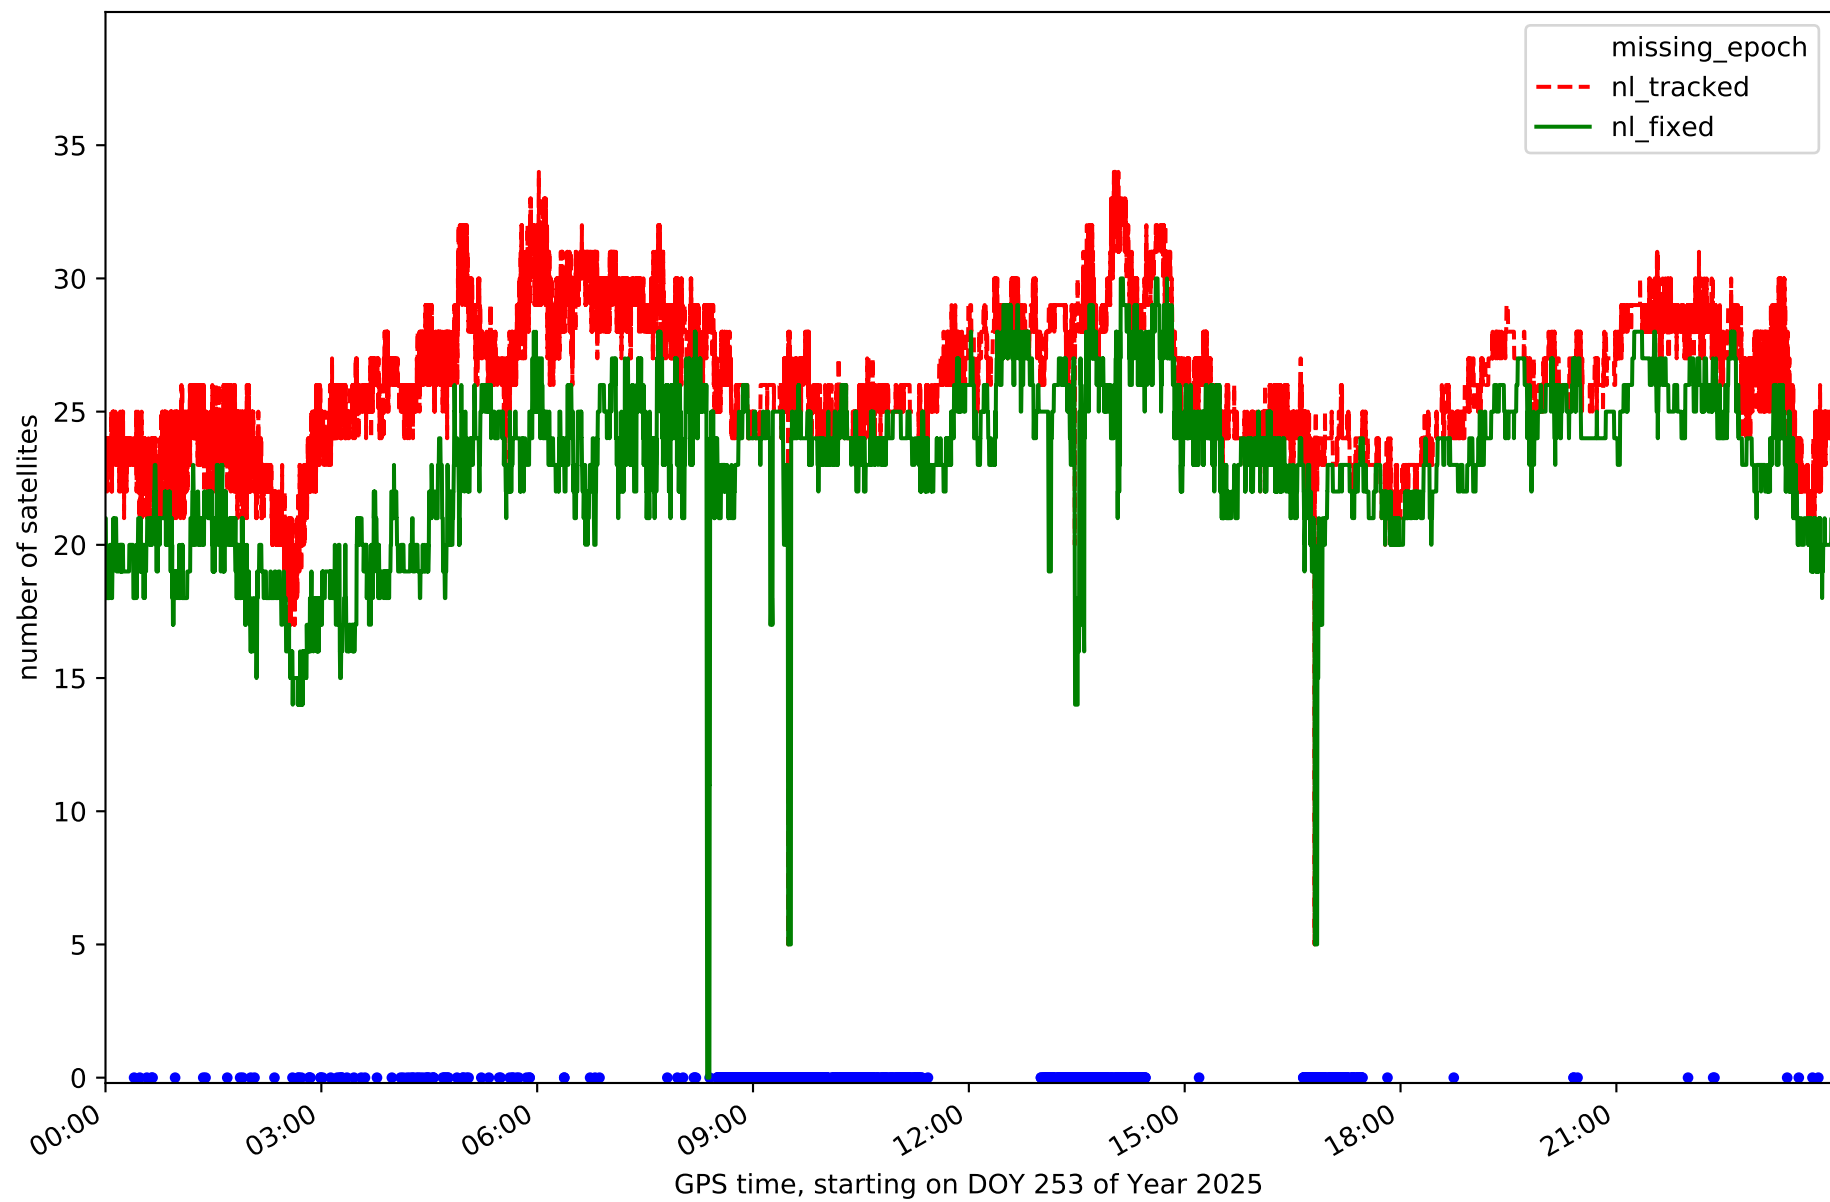


Station TN04 in network N32T

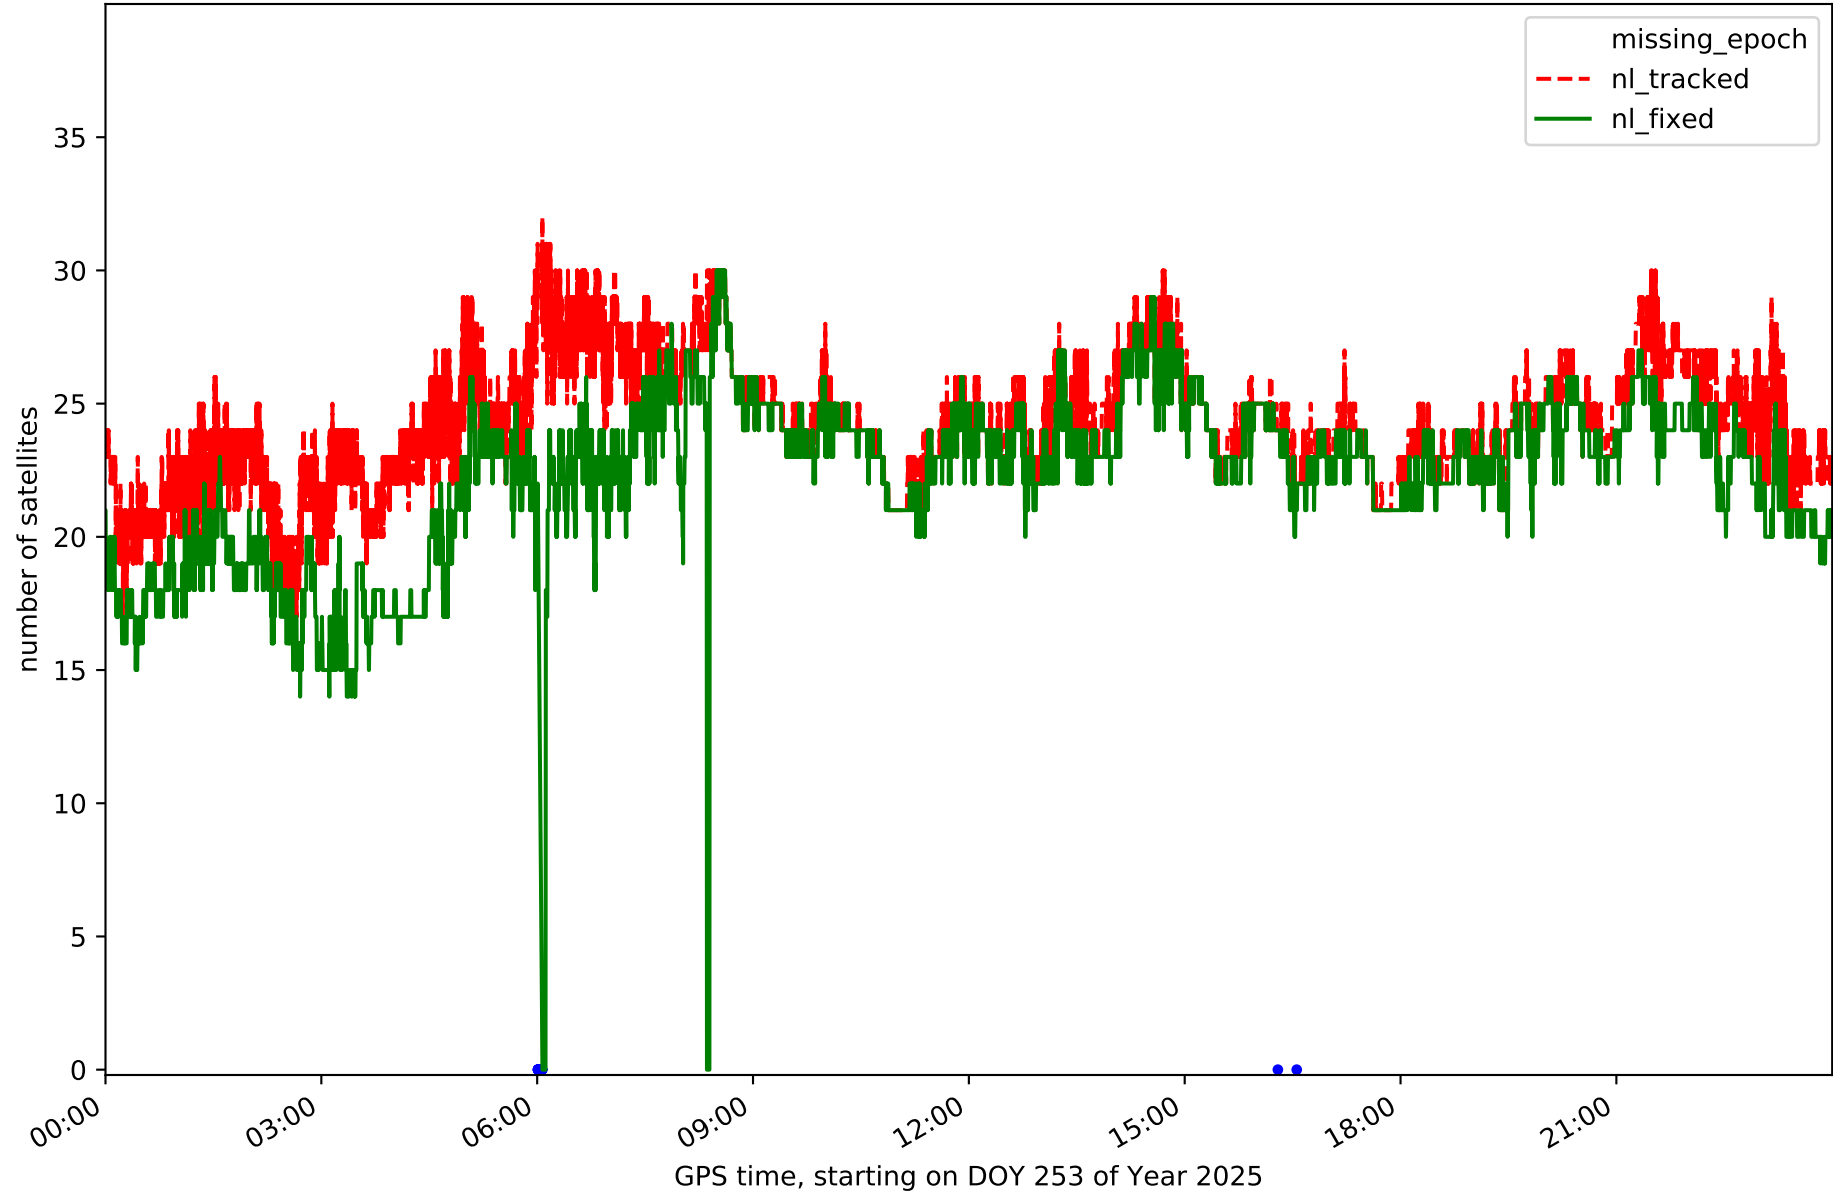


Station TN06 in network N32T

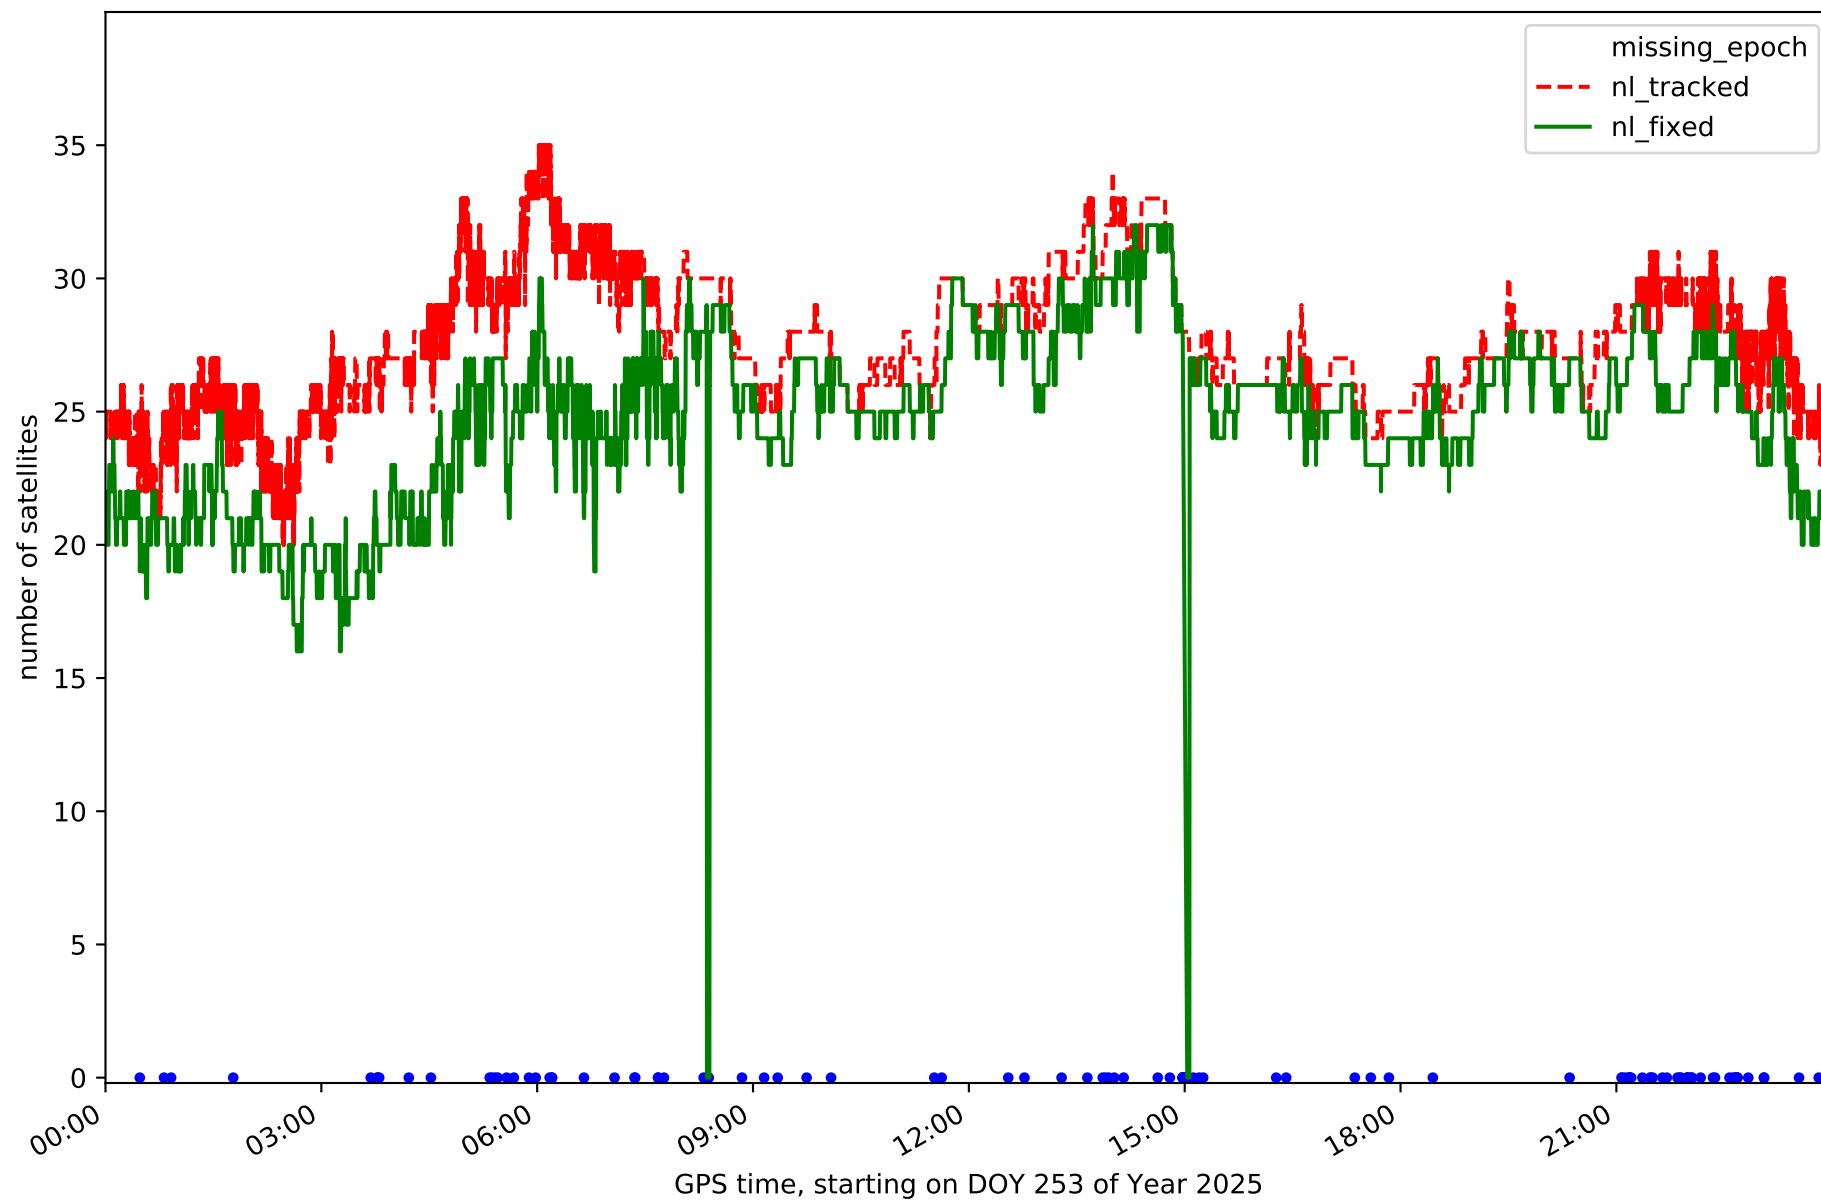


Station TN09 in network N32T

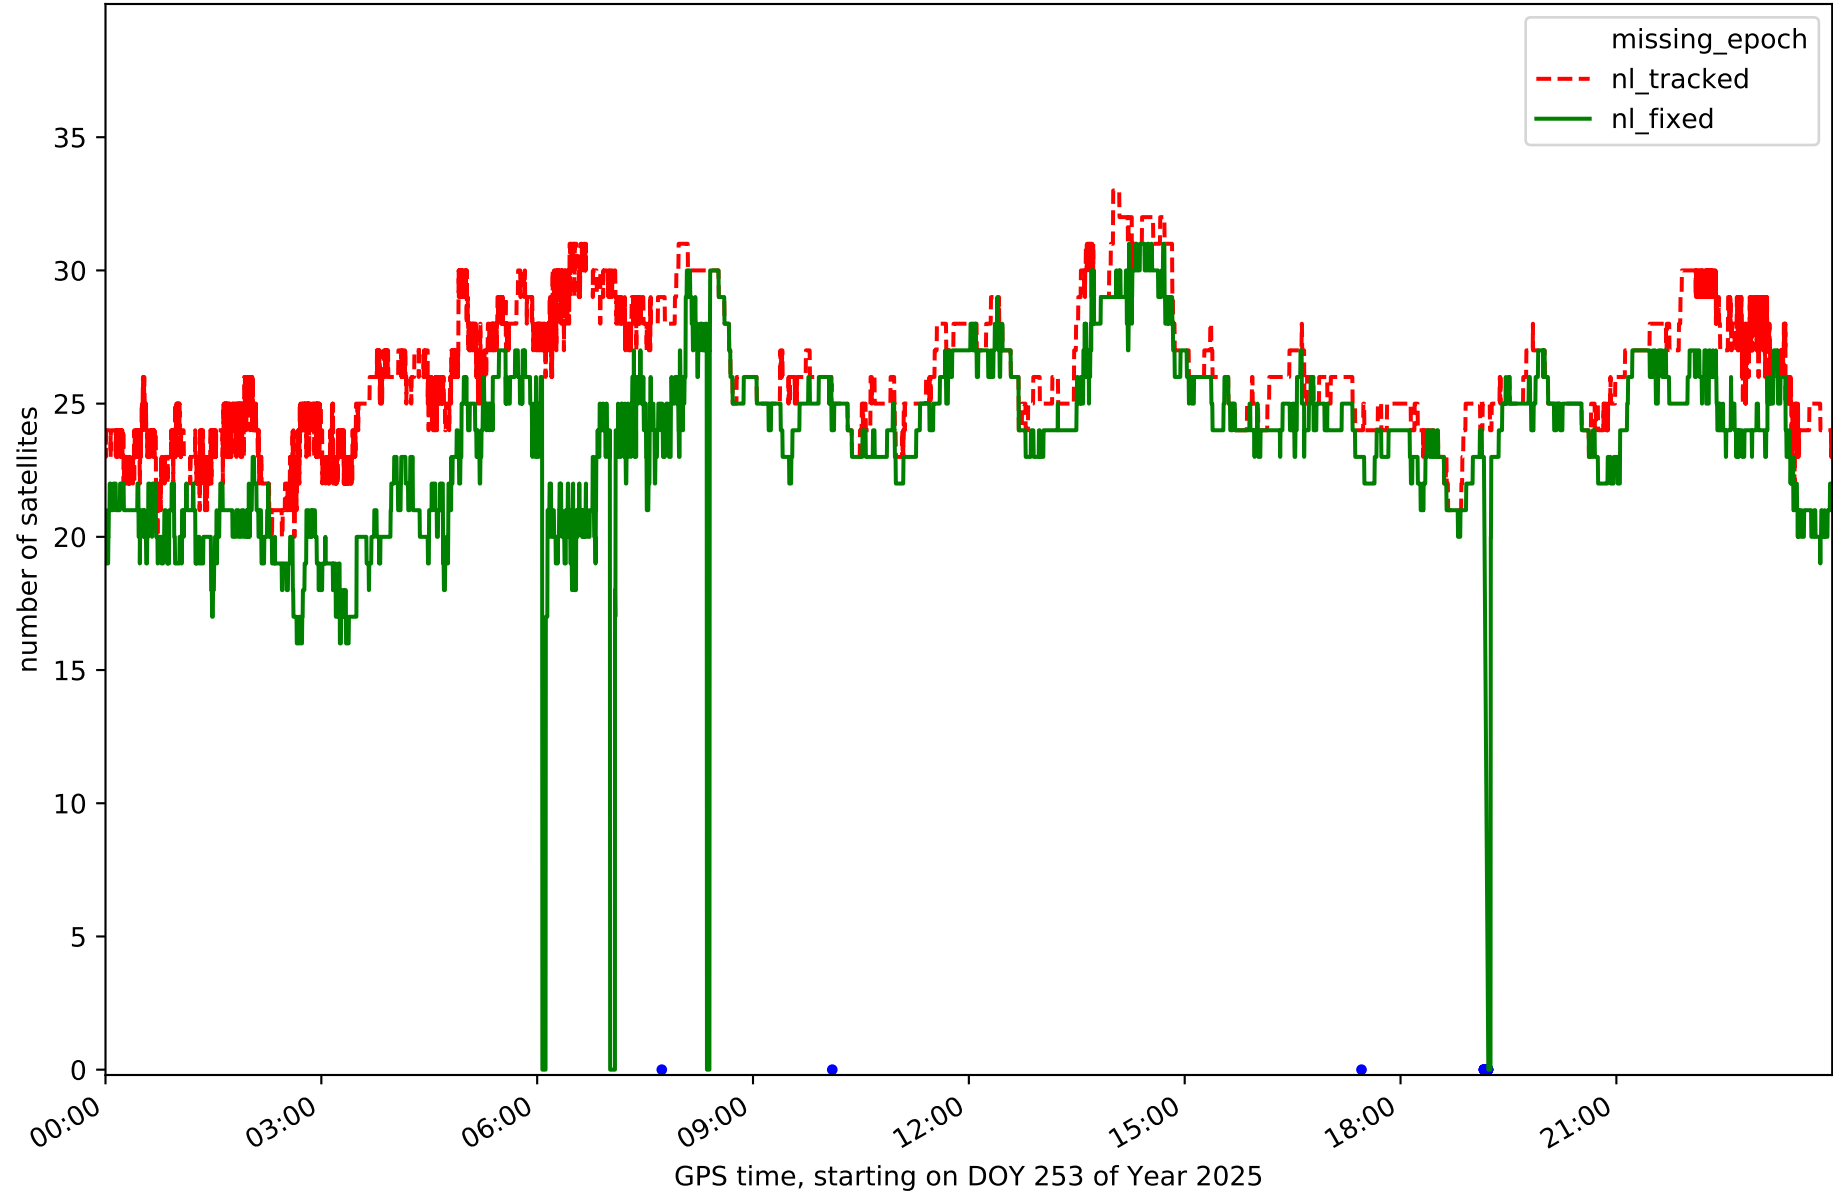


RefCheck for station EH01 in network N32T

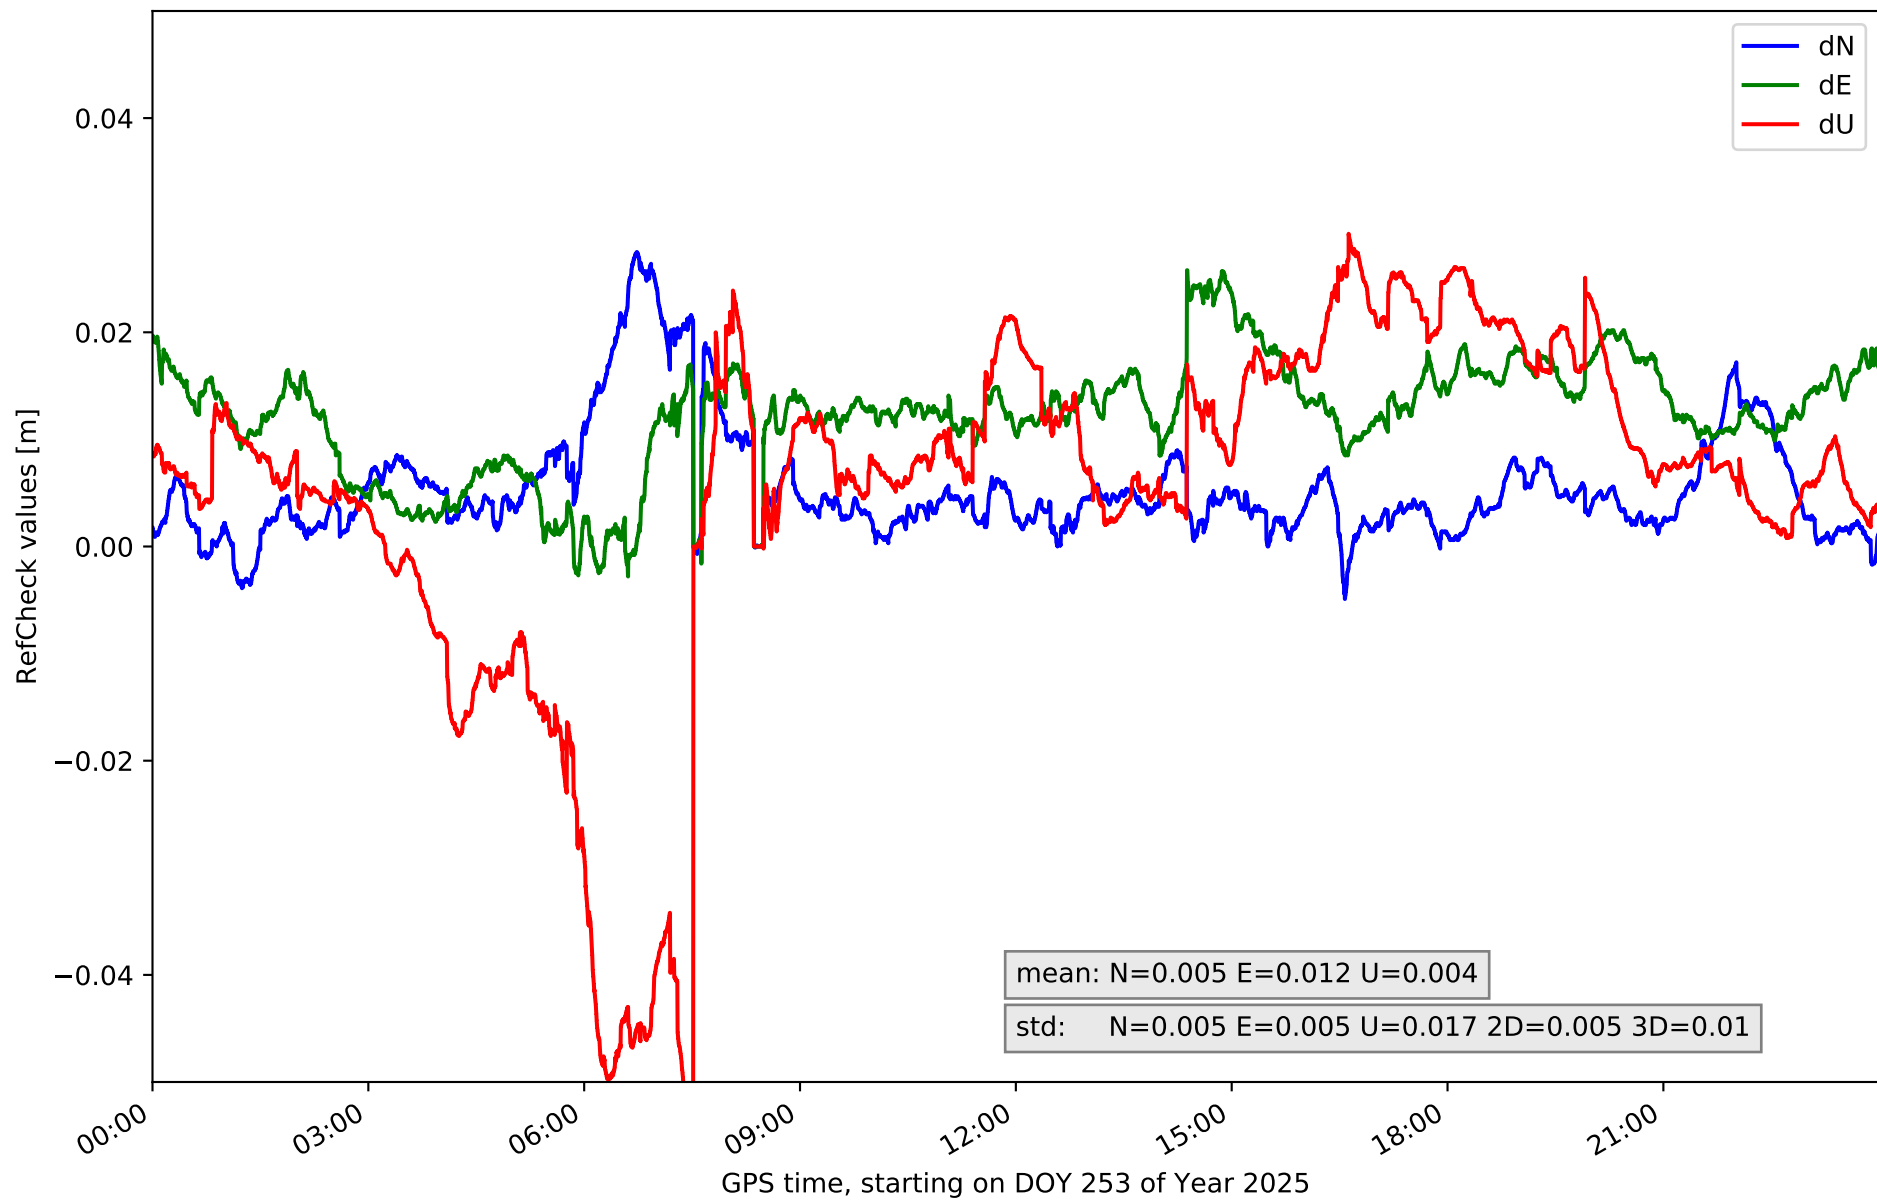


RefCheck for station EH02 in network N32T

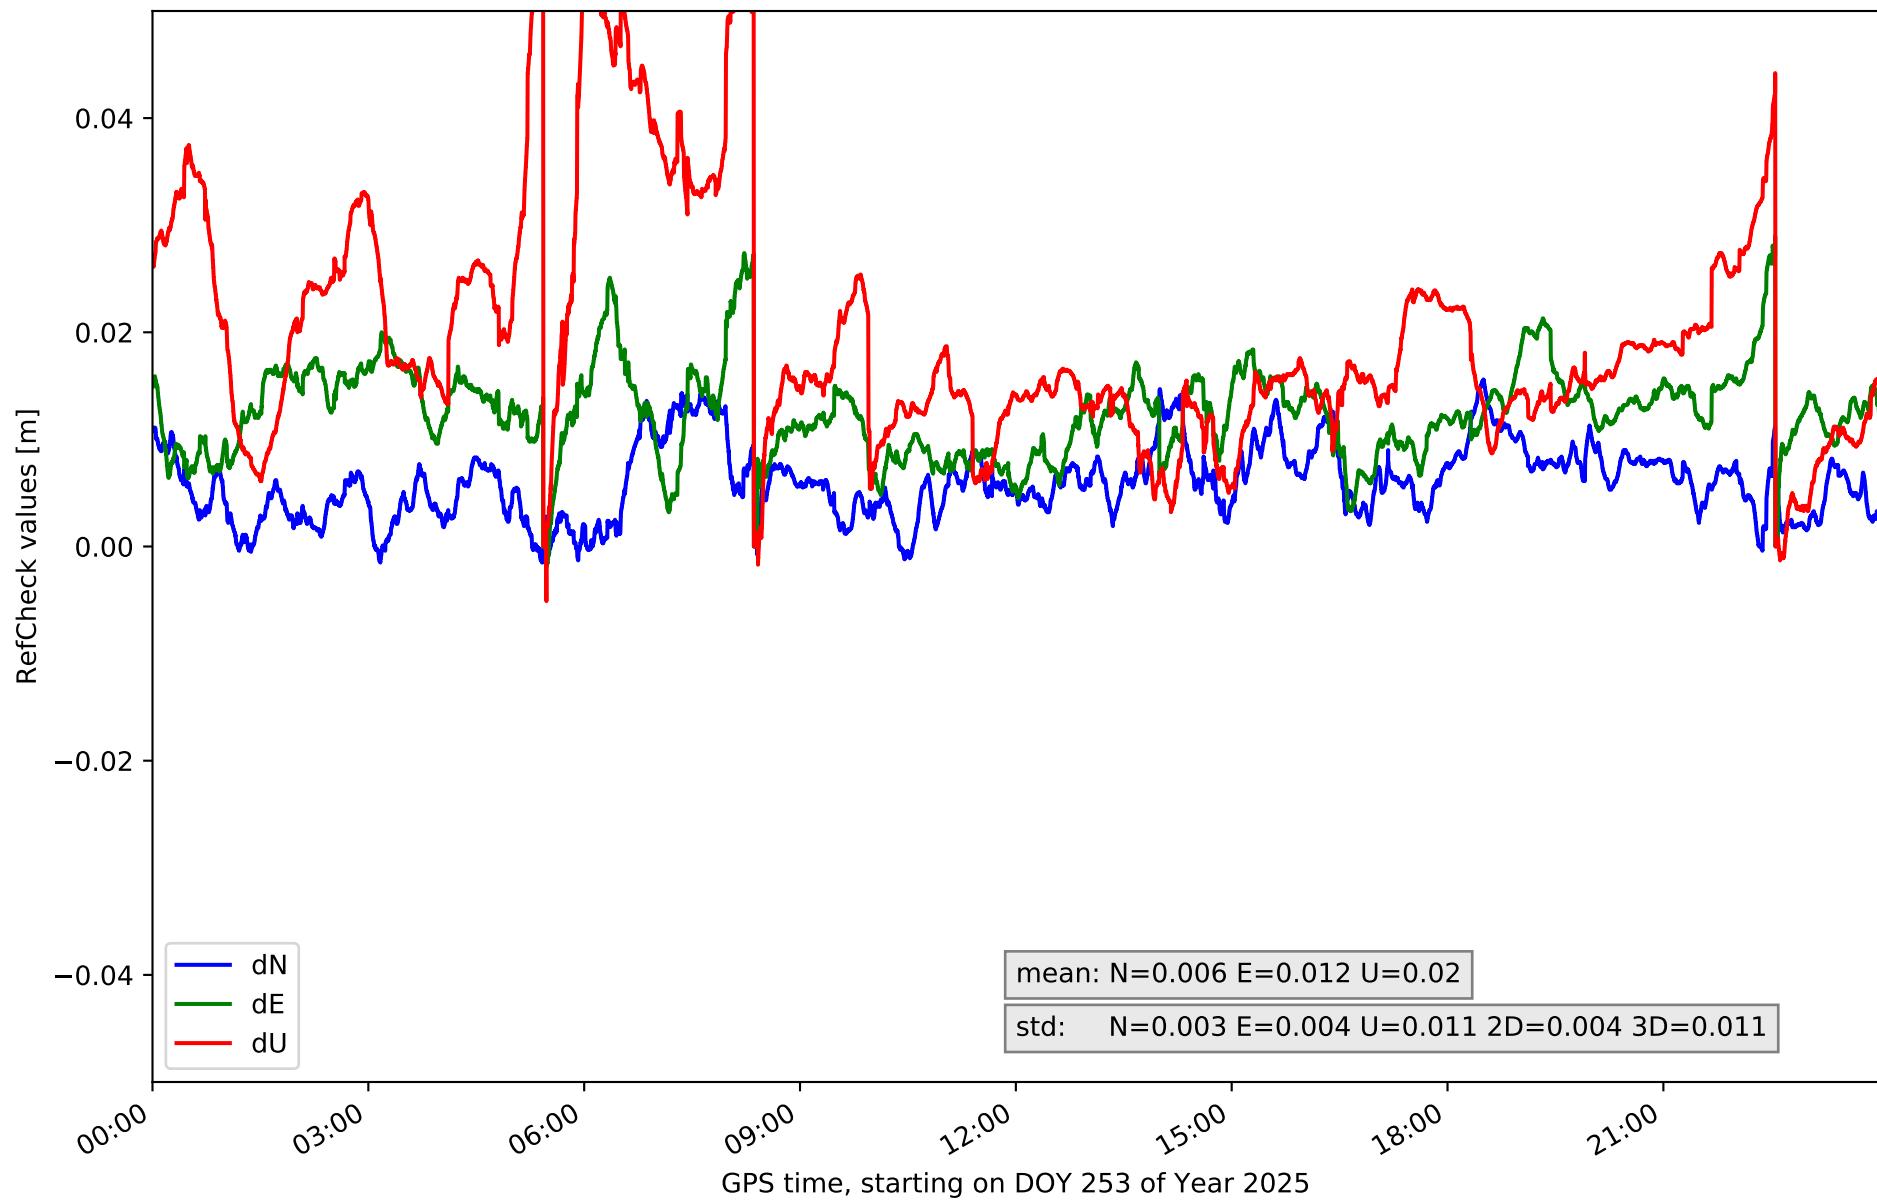


RefCheck for station GOM1 in network N32T

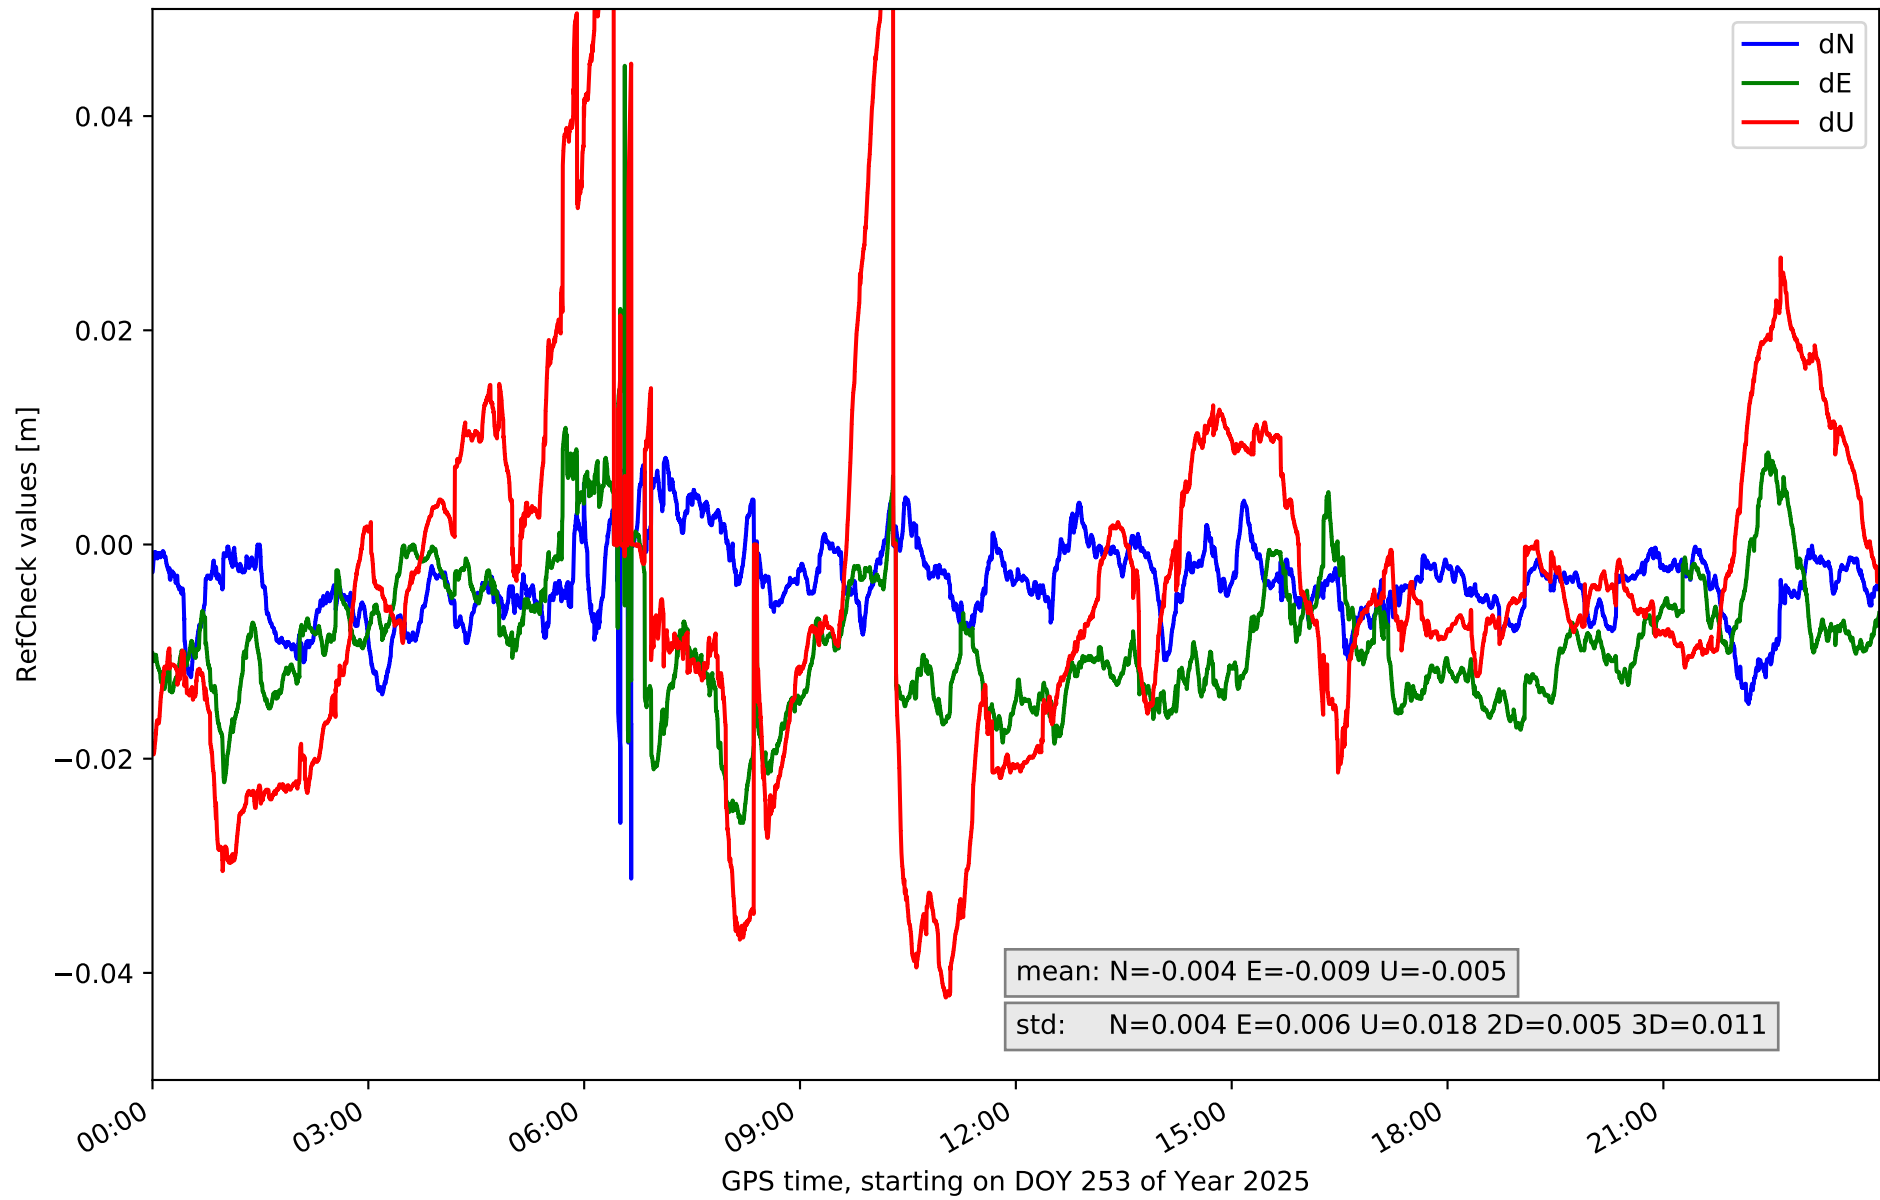


RefCheck for station IZAN in network N32T

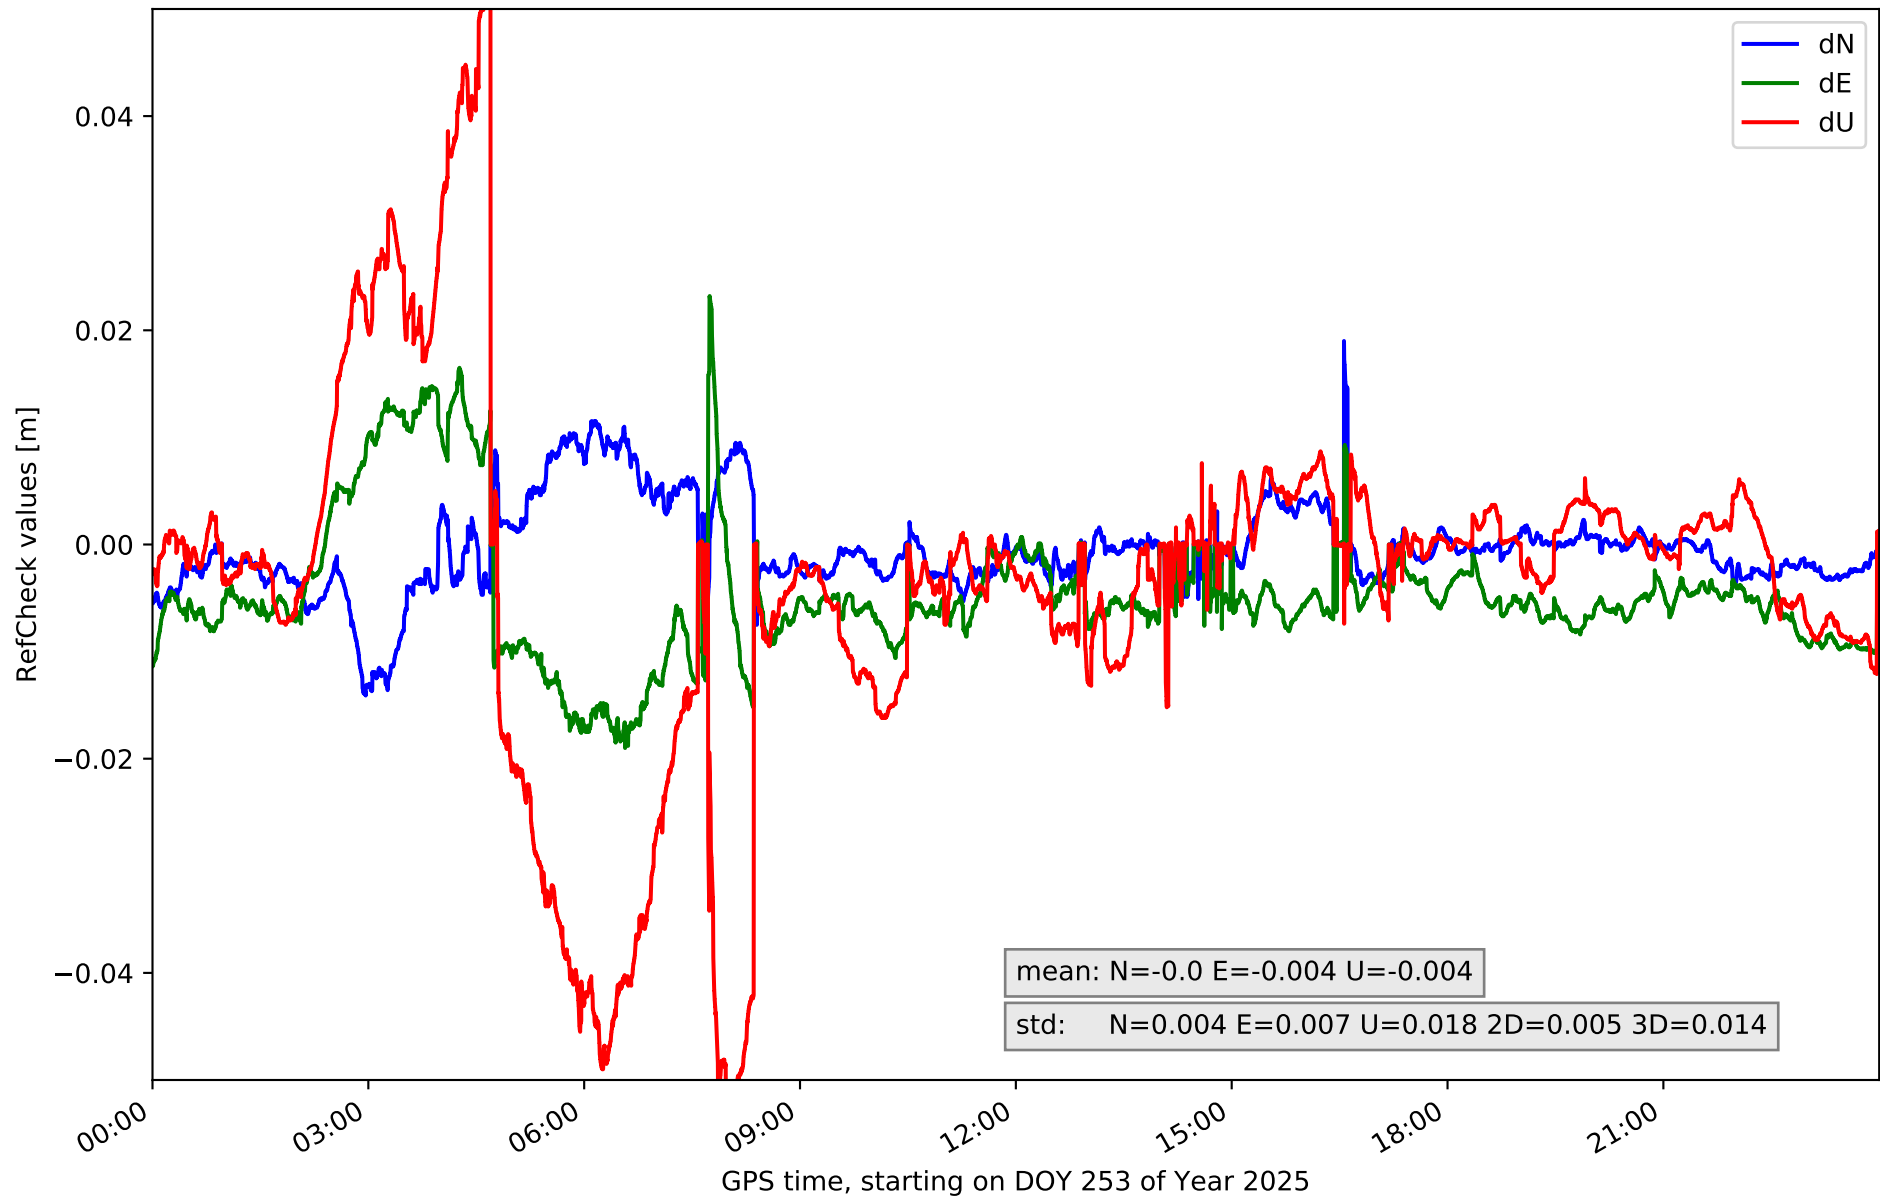


RefCheck for station LP01 in network N32T

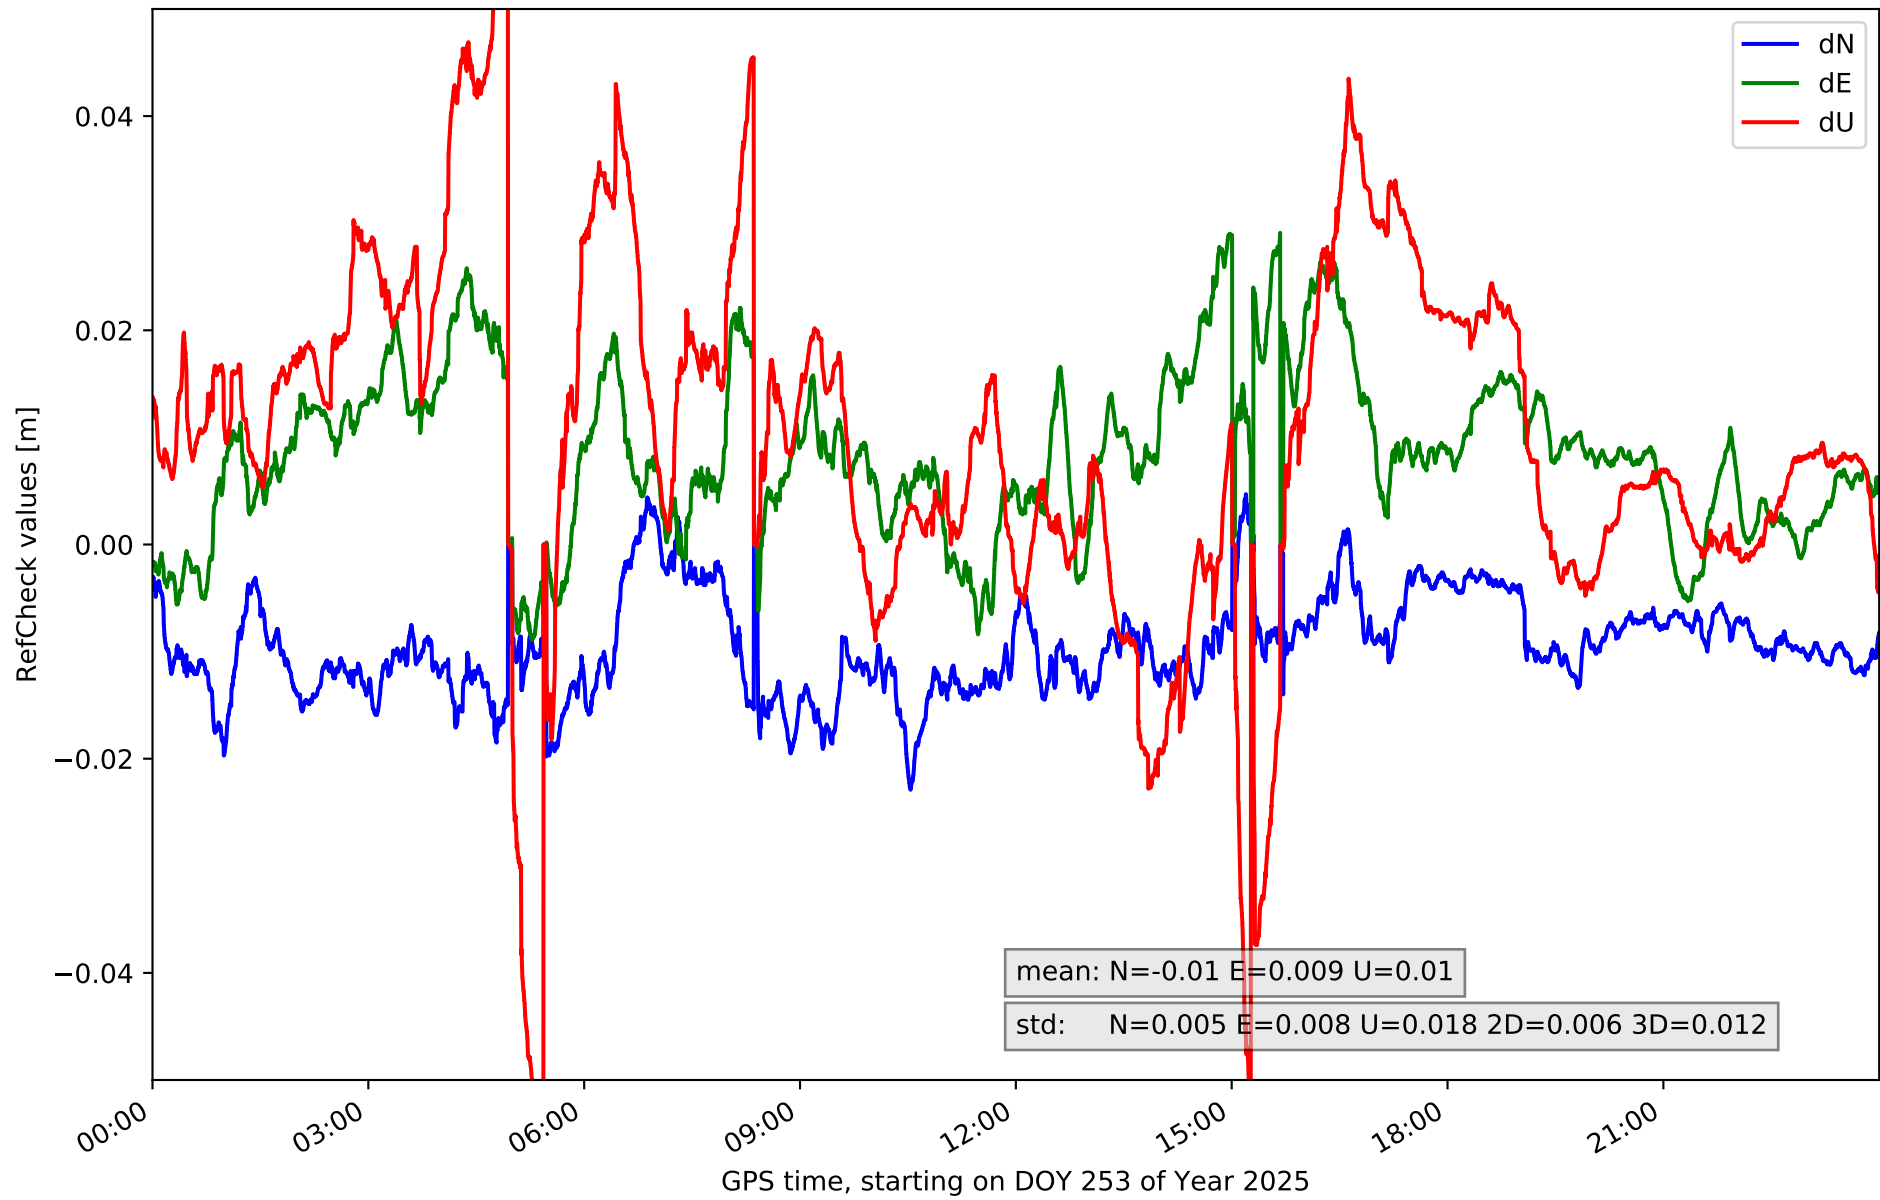


RefCheck for station LP03 in network N32T

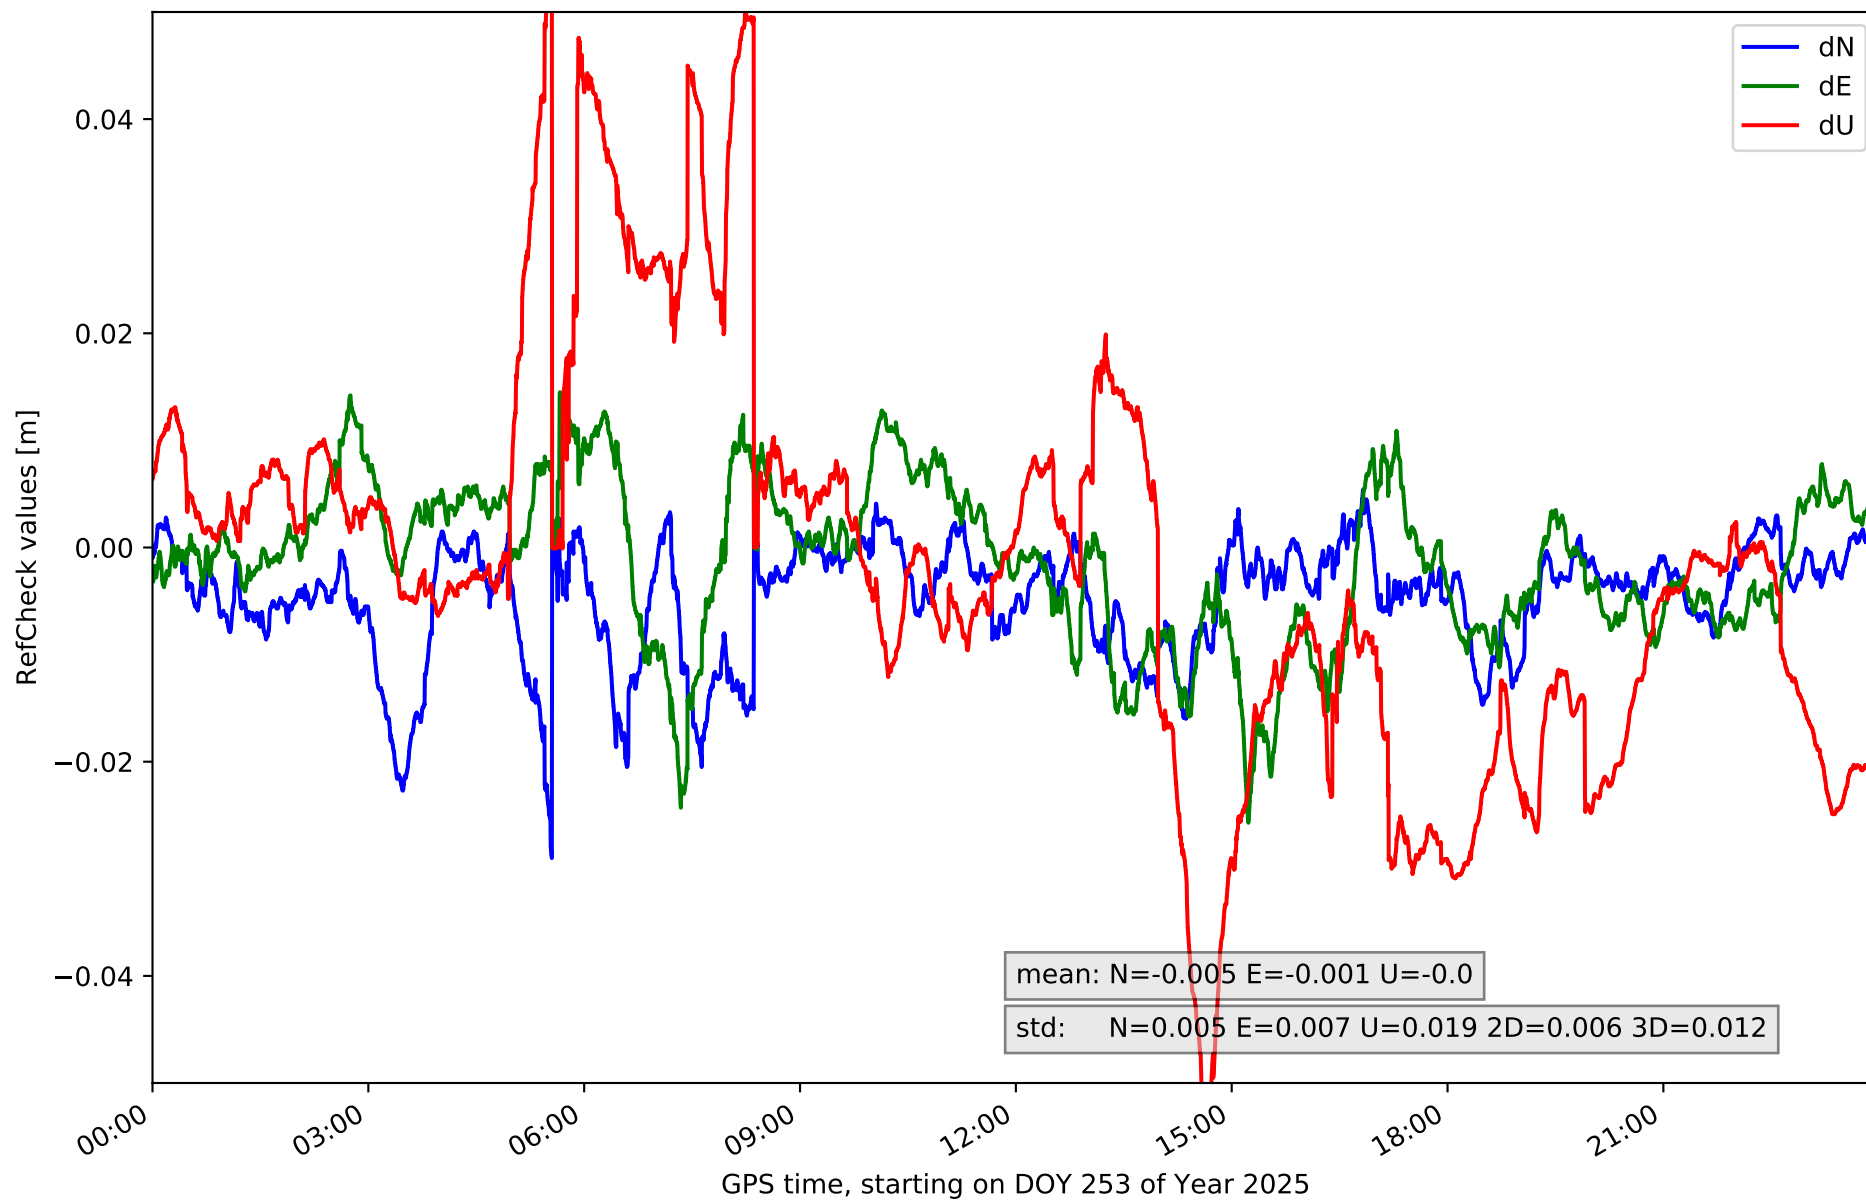


RefCheck for station LPAL in network N32T

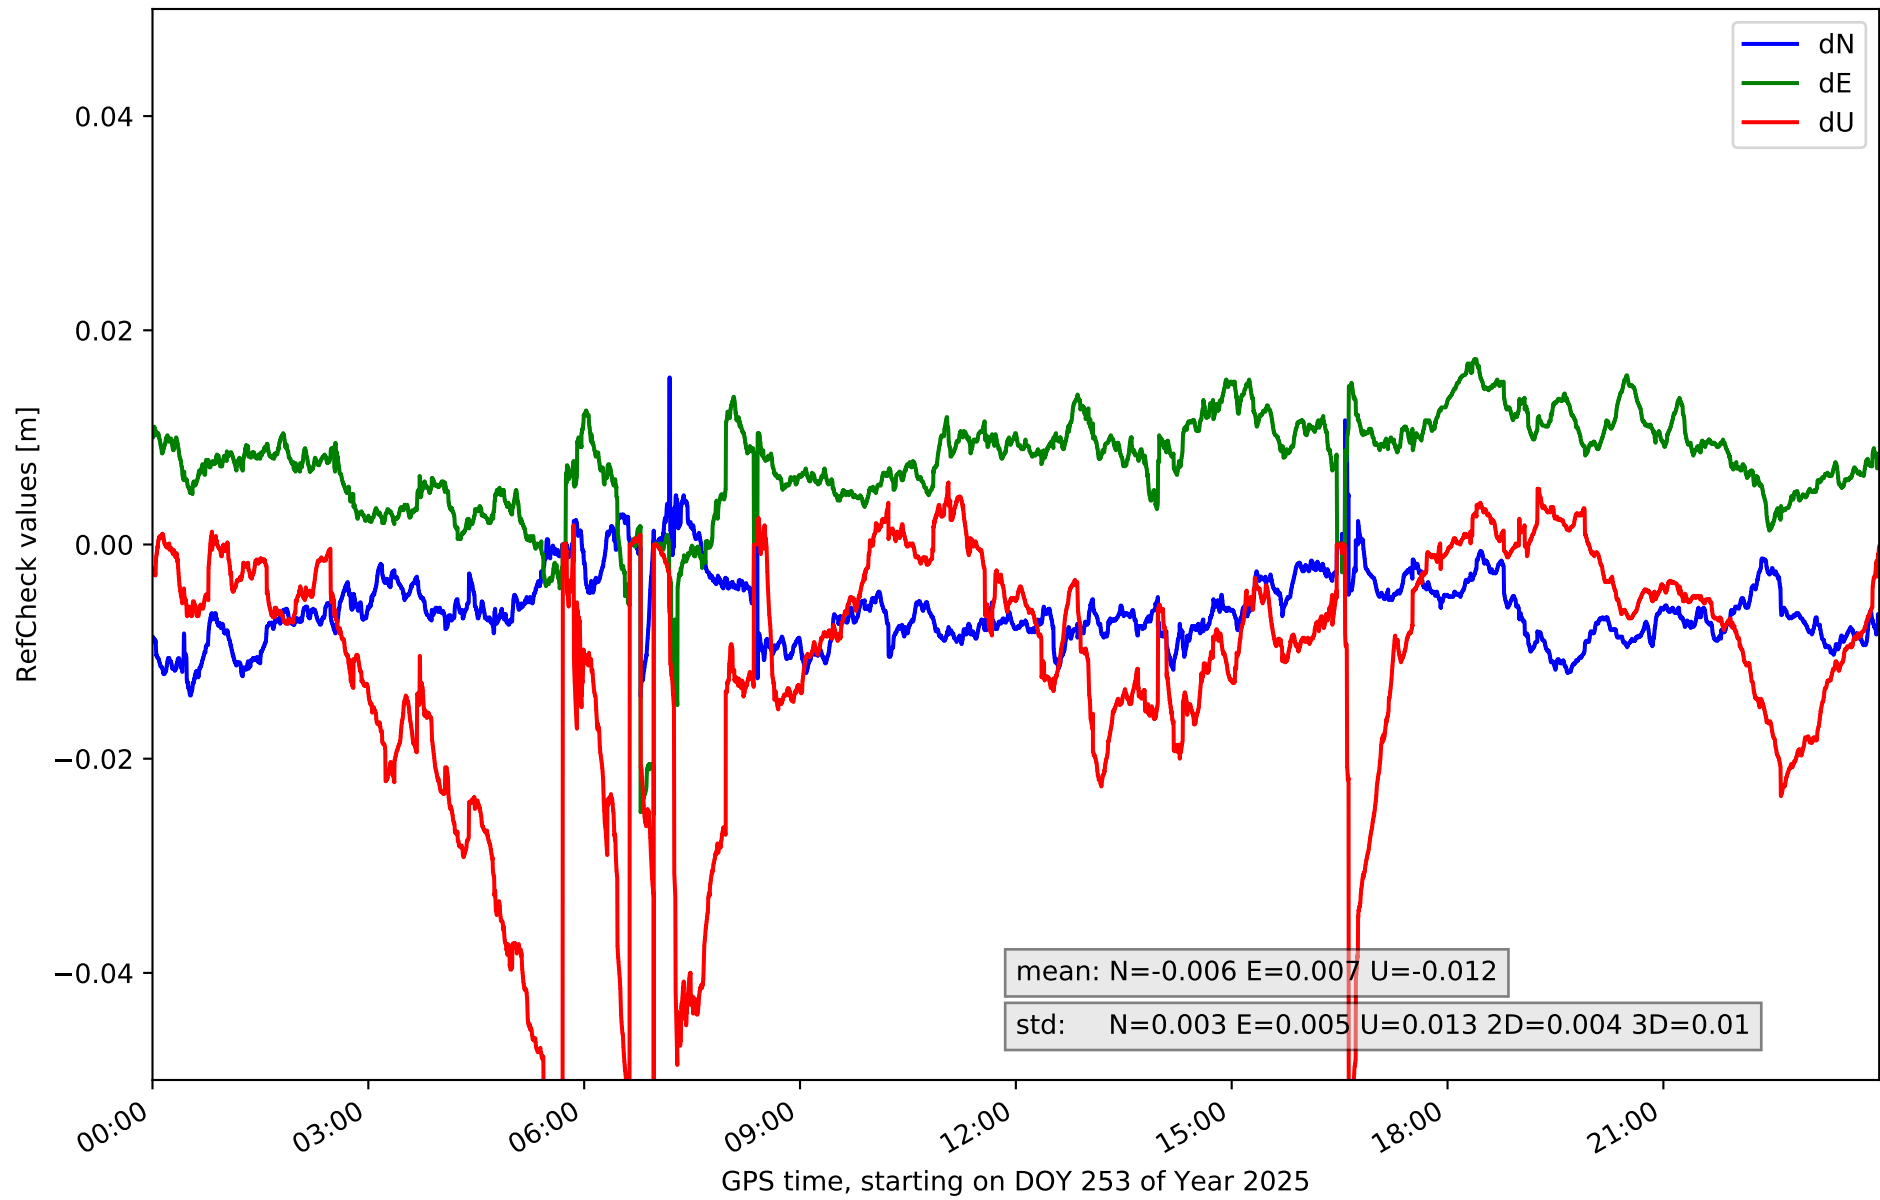


RefCheck for station LRES in network N32T

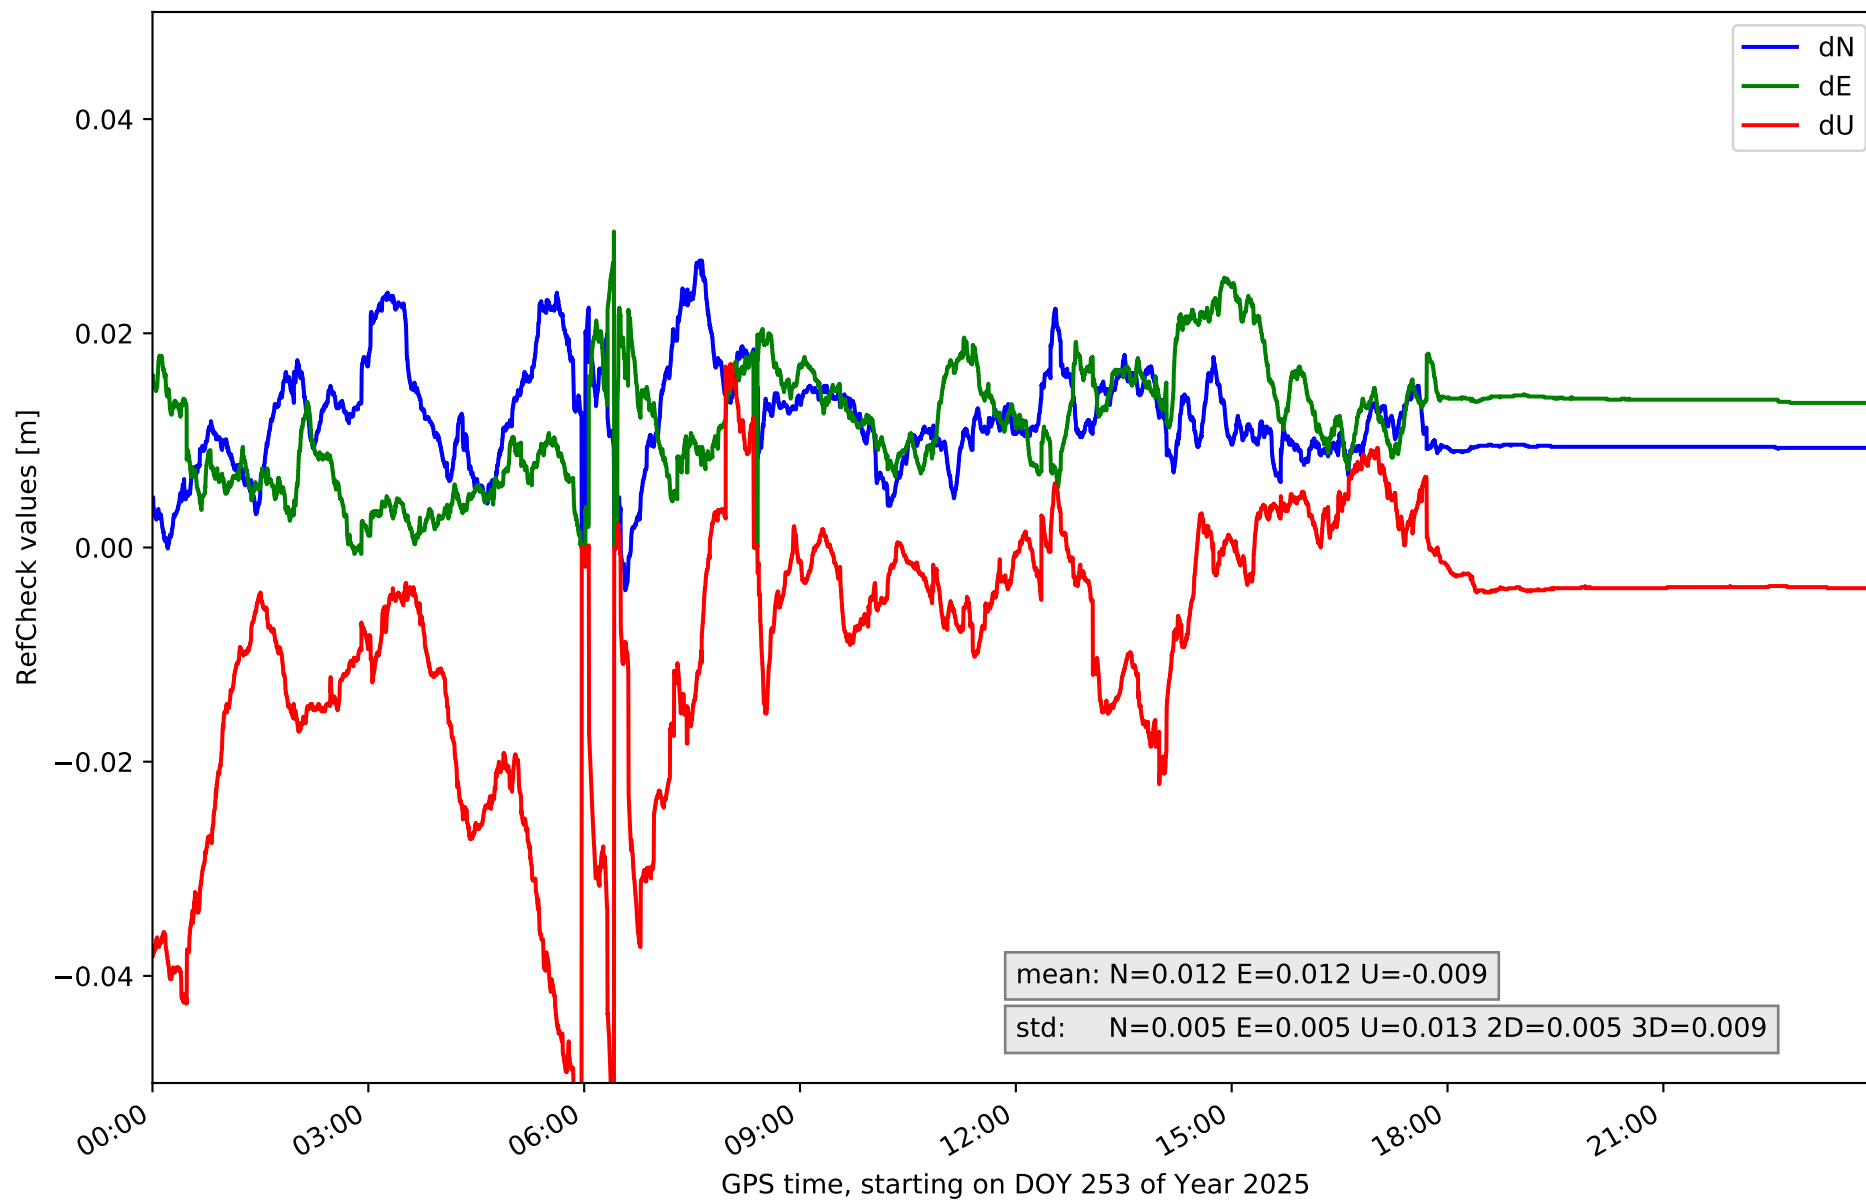


RefCheck for station TN01 in network N32T

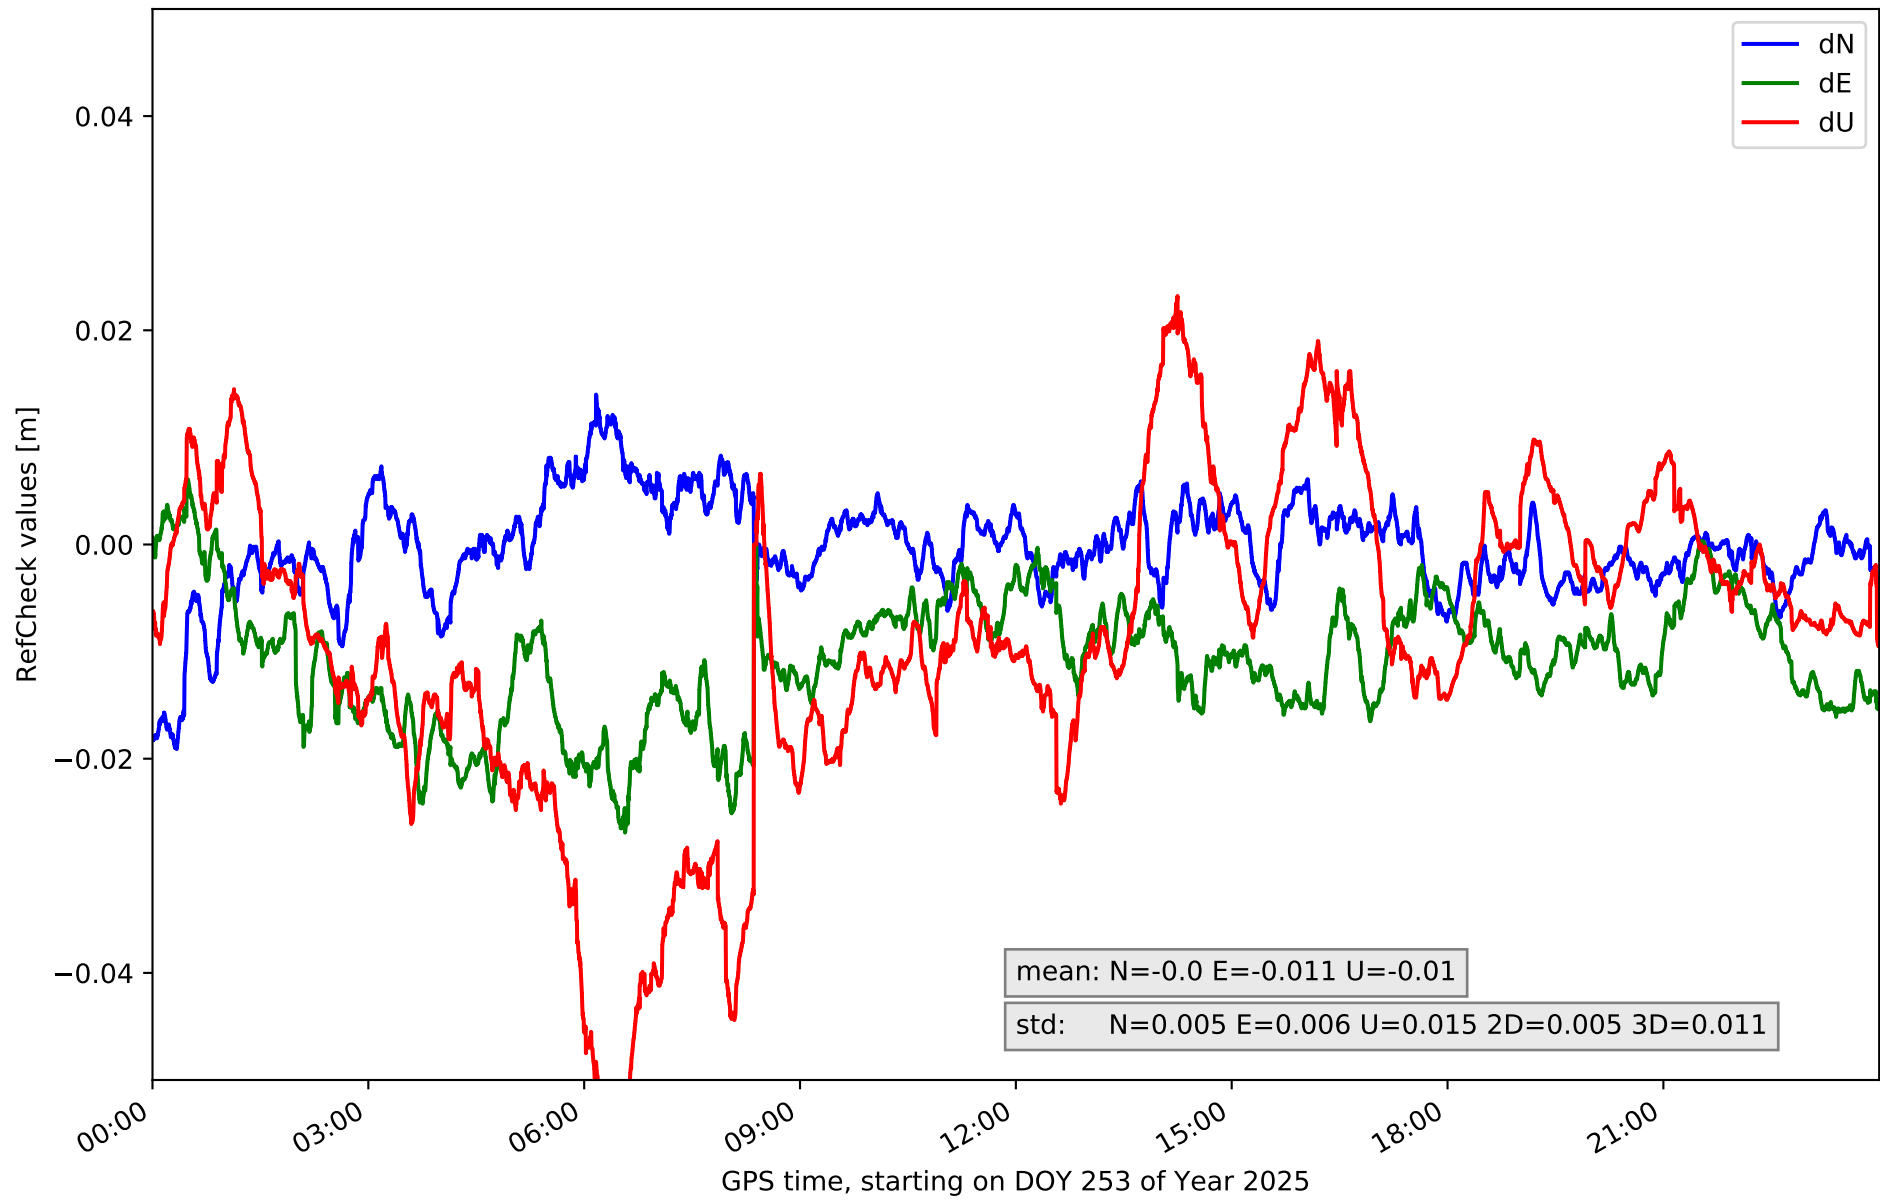


RefCheck for station TN02 in network N32T

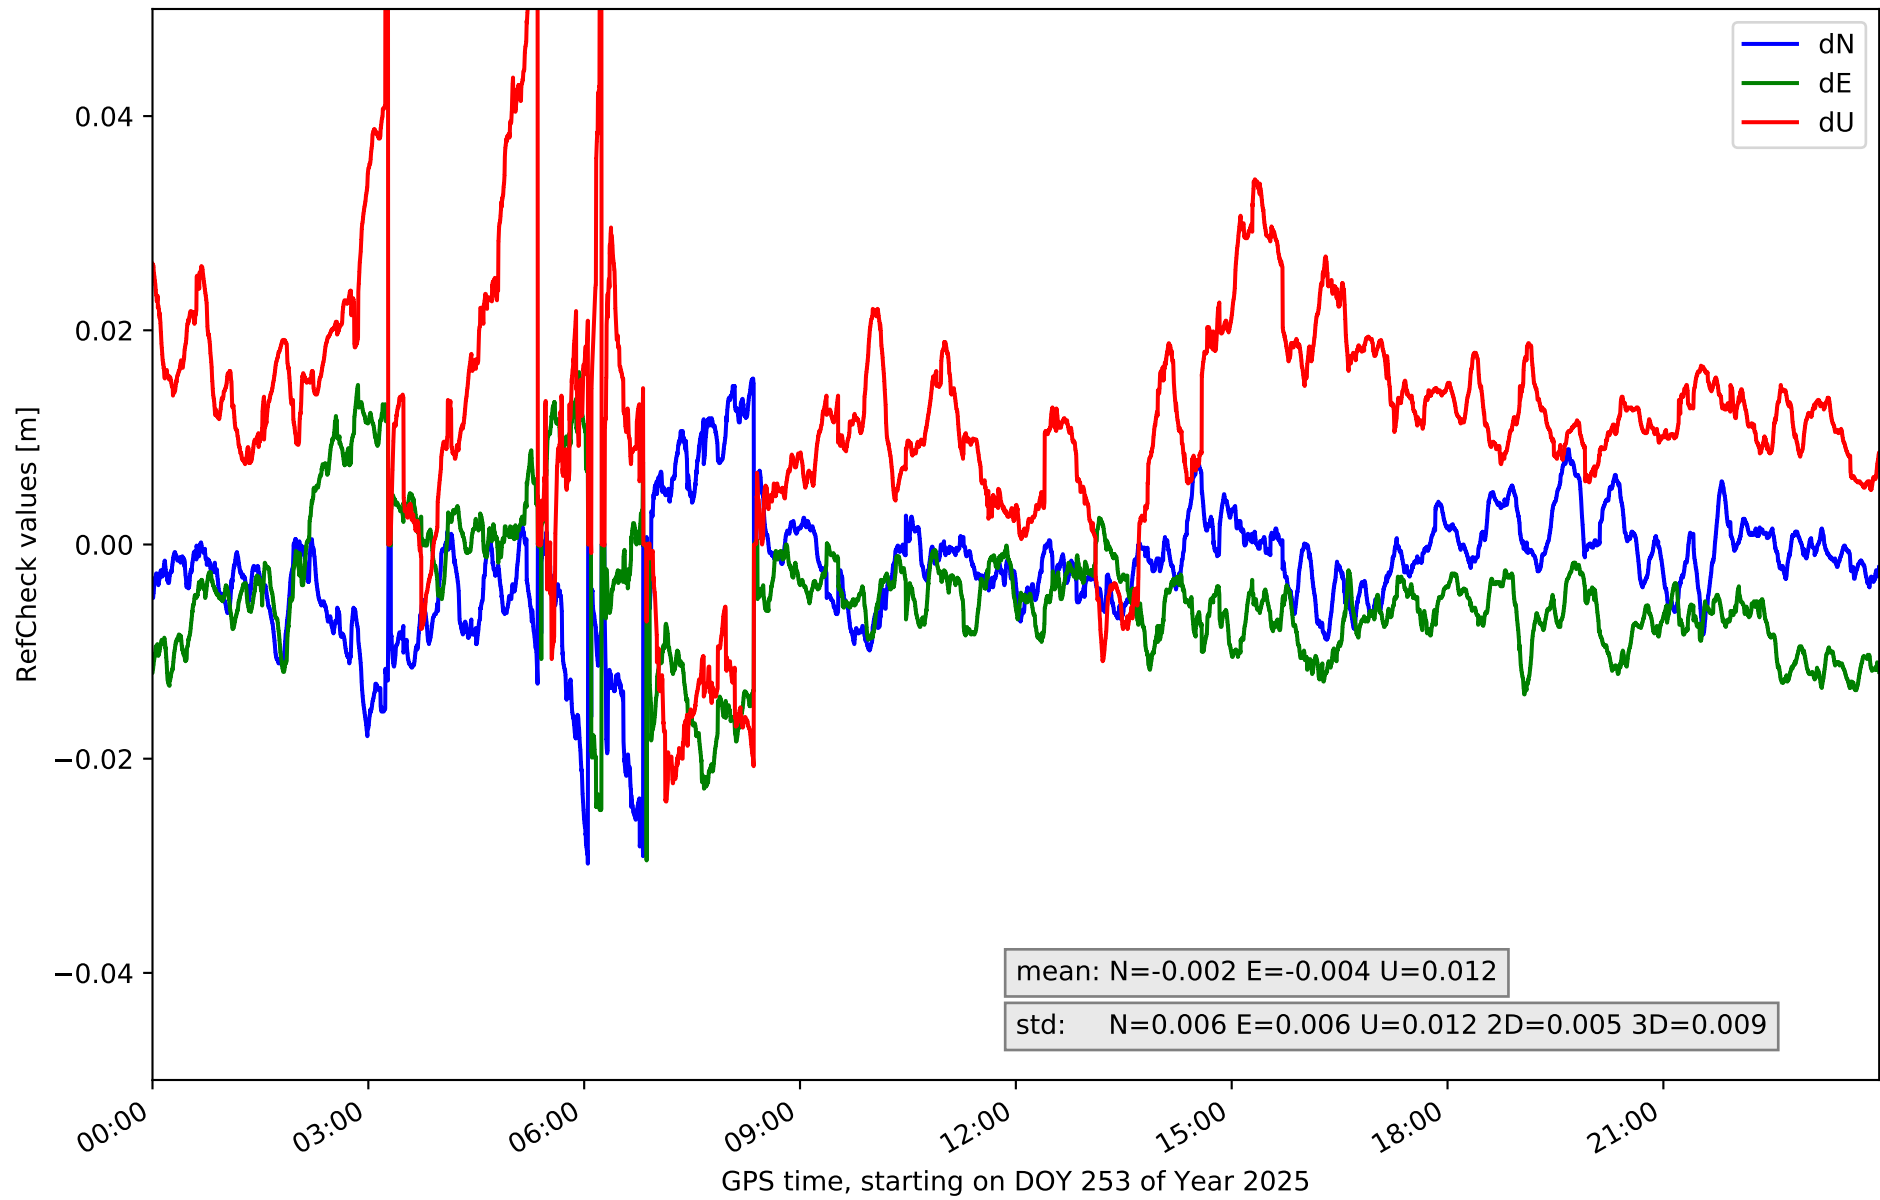


RefCheck for station TN03 in network N32T

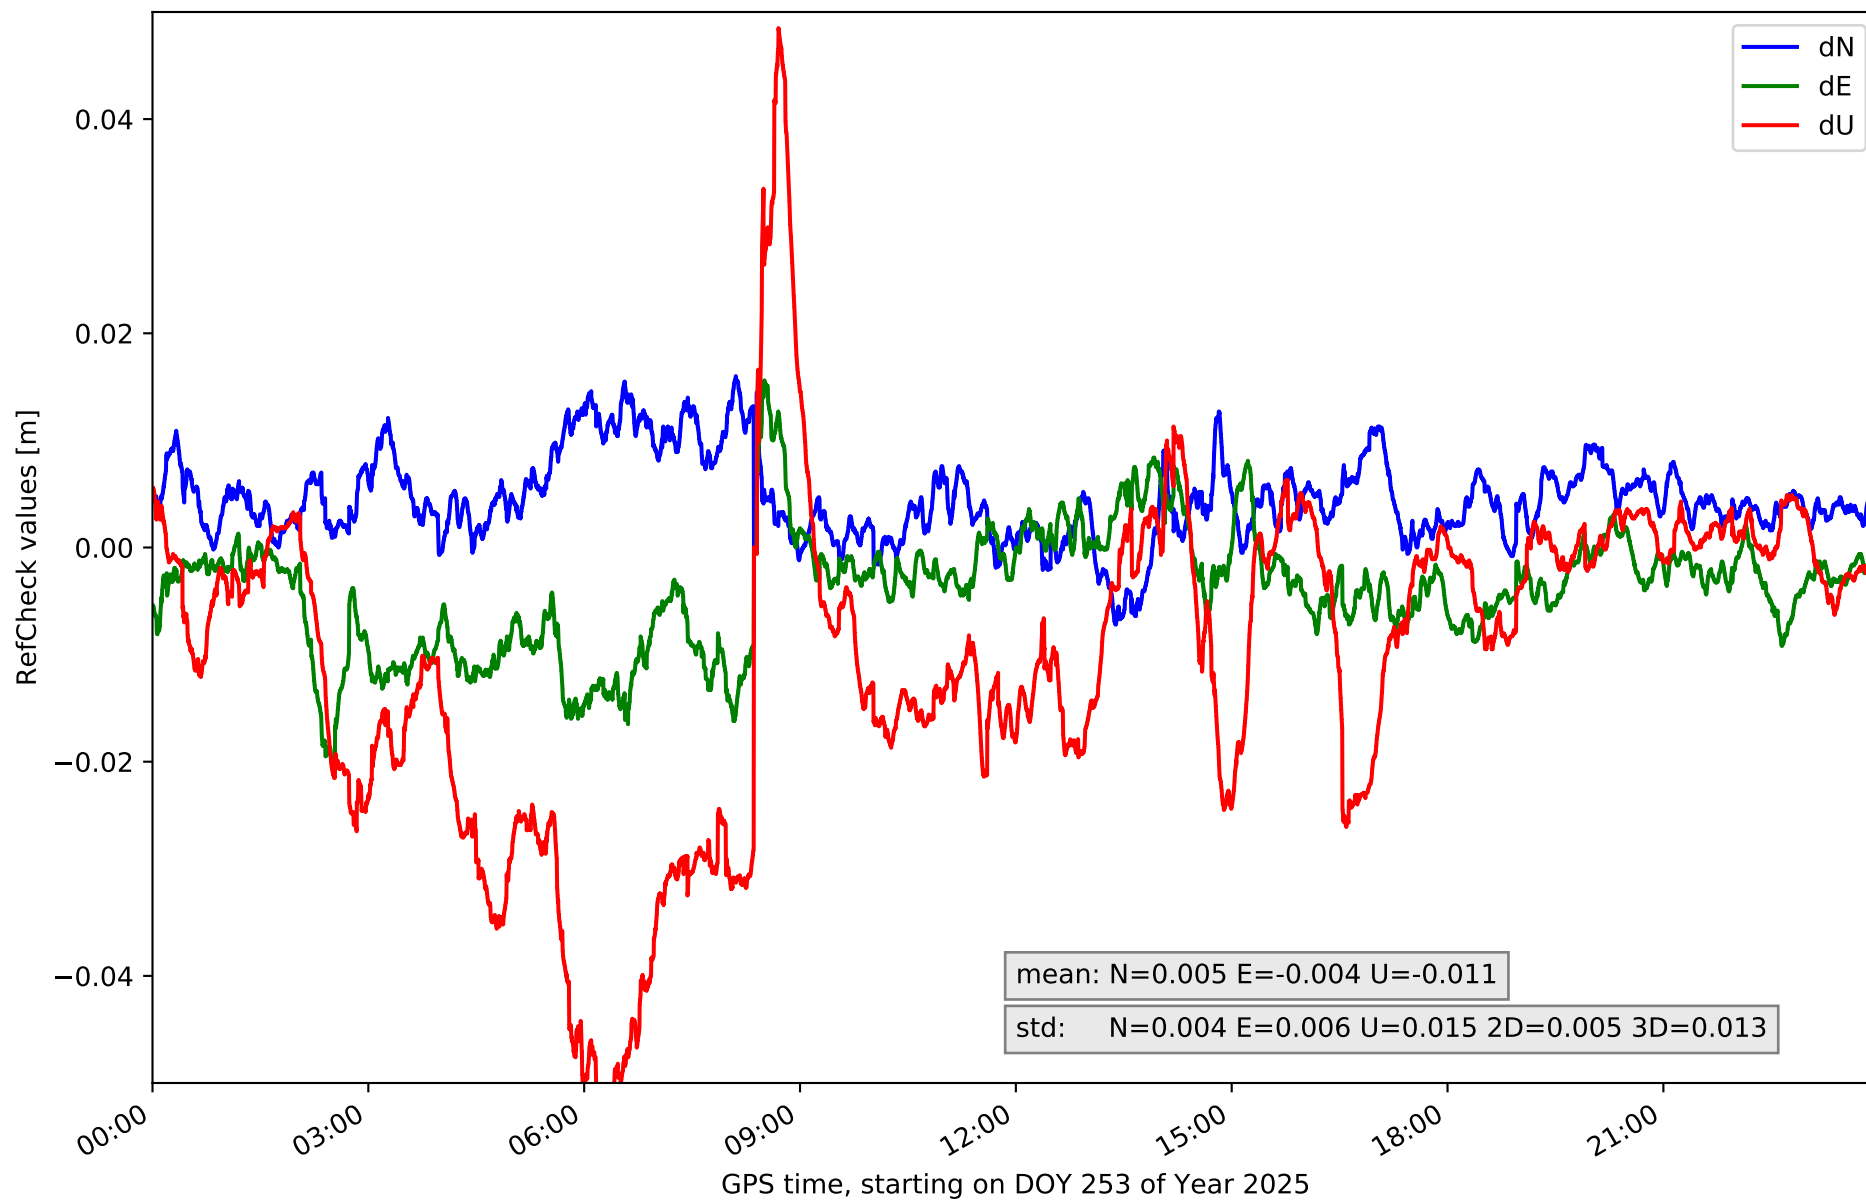


RefCheck for station TN04 in network N32T

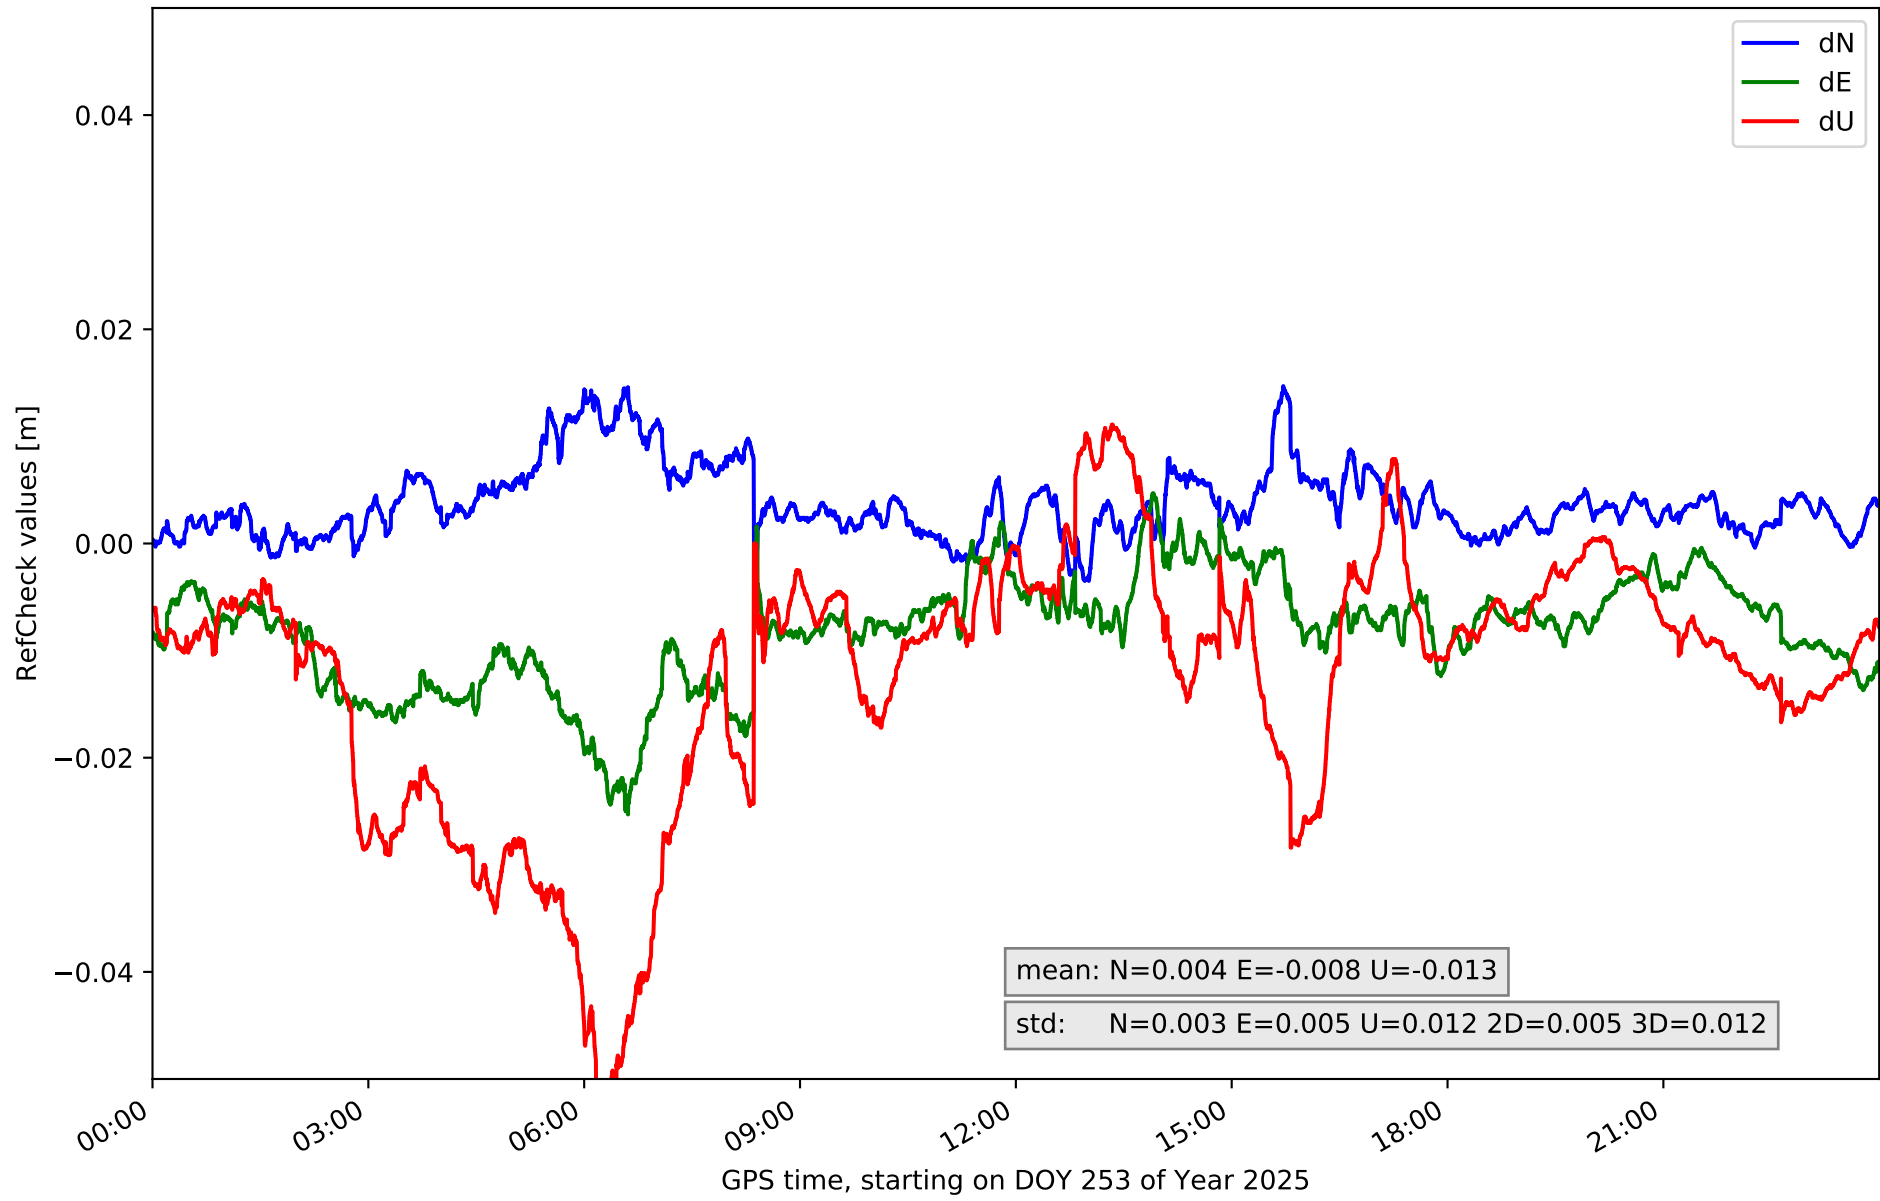

RefCheck for station TN06 in network N32T

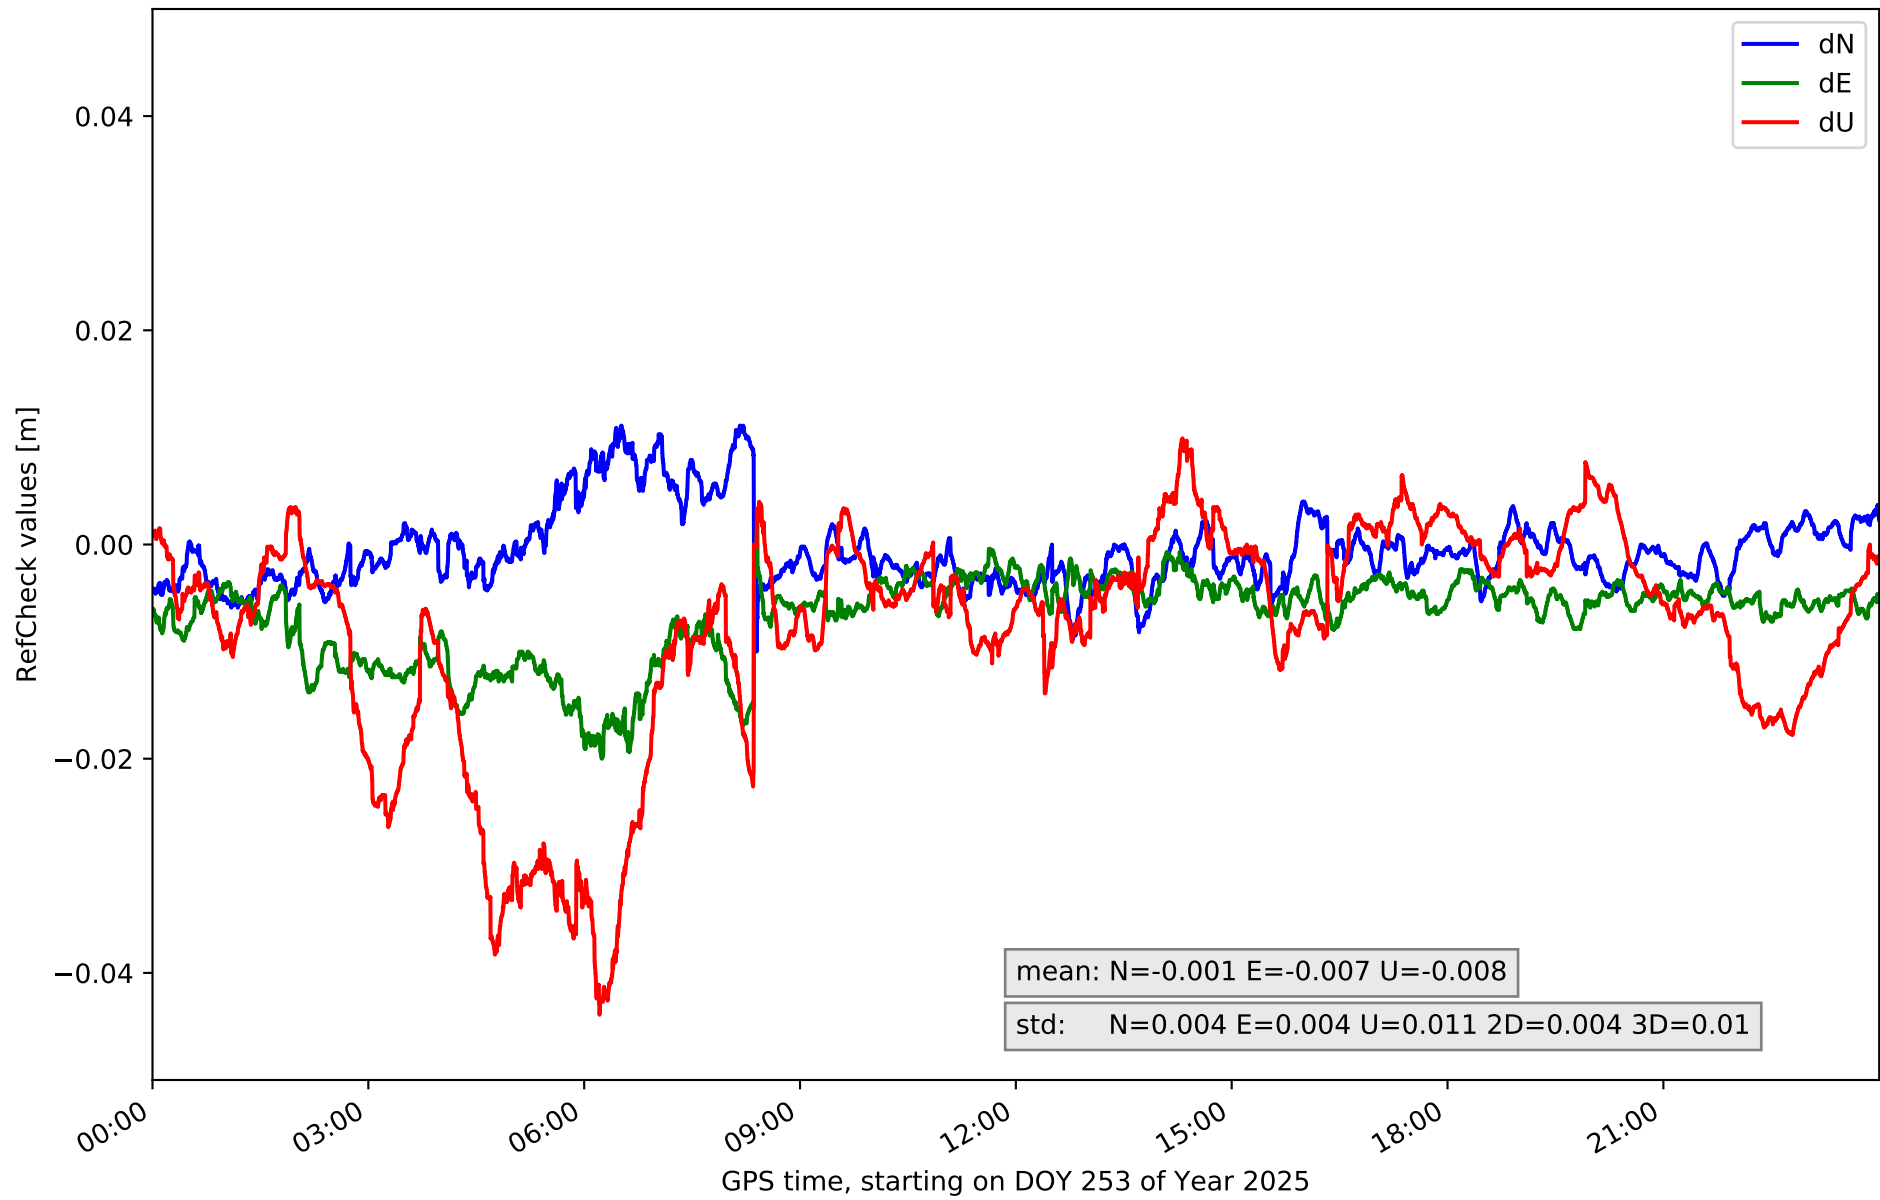

RefCheck for station TN09 in network N32T

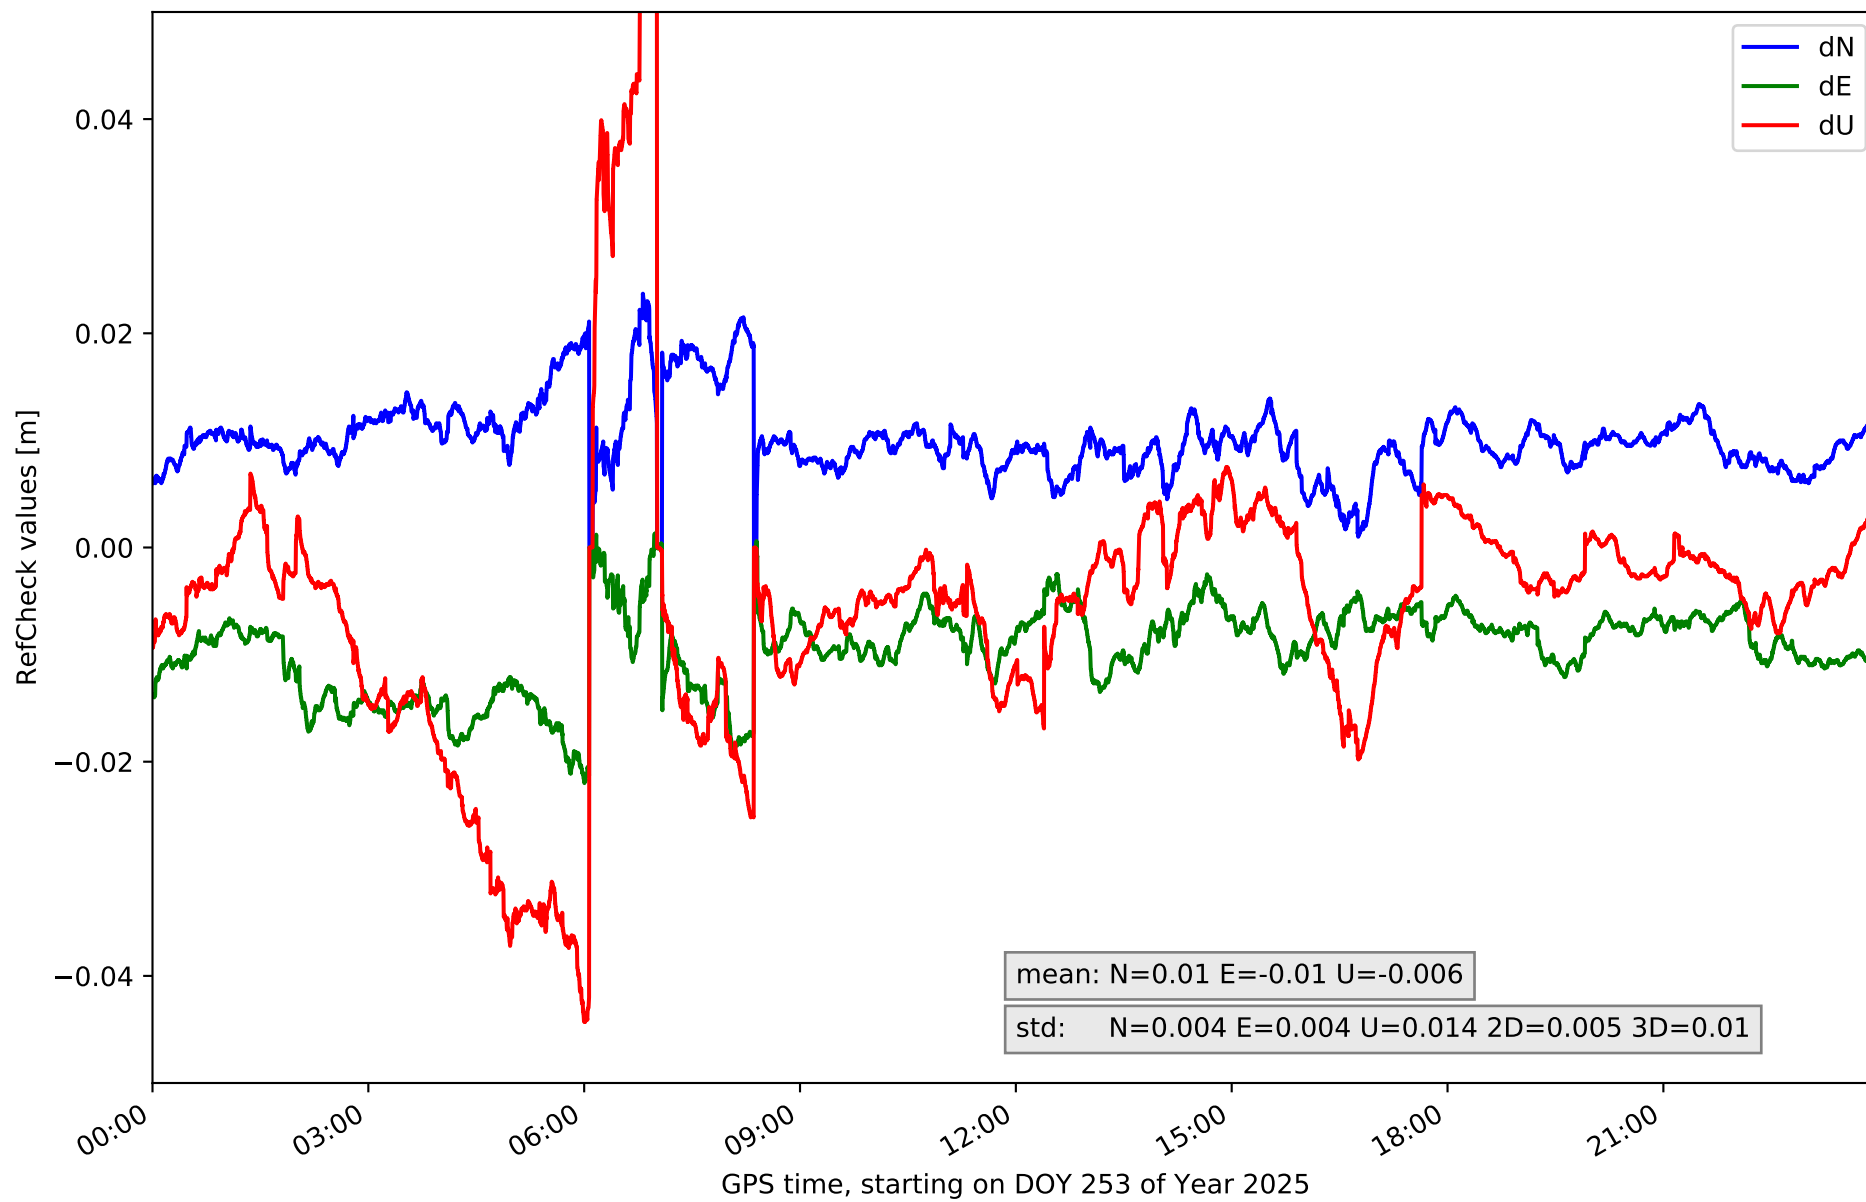

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.005	0.028	0.005	-0.003	0.026	0.005	-0.06	0.029	0.017	0.005	0.01	56586	81.2	27660	39.7
EH02	-0.002	0.016	0.003	-0.002	0.029	0.004	-0.005	0.061	0.011	0.004	0.011	57852	83.1	44794	64.3
GOM1	-0.031	0.016	0.004	-0.026	0.045	0.006	-0.042	0.06	0.018	0.005	0.011	43374	62.3	24004	34.5
IZAN	-0.014	0.019	0.004	-0.019	0.023	0.007	-0.057	0.072	0.018	0.005	0.014	15753	22.6	16519	23.7
LP01	-0.023	0.005	0.005	-0.009	0.029	0.008	-0.062	0.06	0.018	0.006	0.012	56068	80.5	36936	53.0
LP03	-0.029	0.005	0.005	-0.026	0.015	0.007	-0.054	0.059	0.019	0.006	0.012	24841	35.7	24673	35.4
LPAL	-0.014	0.016	0.003	-0.025	0.017	0.005	-0.074	0.006	0.013	0.004	0.01	44323	63.6	15762	22.6
LRES	-0.004	0.027	0.005	-0.001	0.029	0.005	-0.06	0.017	0.013	0.005	0.009	65225	93.6	34817	50.0
TN01	-0.019	0.014	0.005	-0.027	0.006	0.006	-0.055	0.023	0.015	0.005	0.011	40379	58.0	24305	34.9
TN02	-0.03	0.015	0.006	-0.029	0.016	0.006	-0.024	0.061	0.012	0.005	0.009	21326	30.6	22425	32.2
TN03	-0.007	0.016	0.004	-0.021	0.016	0.006	-0.058	0.049	0.015	0.005	0.013	20083	28.8	22272	32.0
TN04	-0.004	0.015	0.003	-0.025	0.005	0.005	-0.056	0.011	0.012	0.005	0.012	26088	37.5	20619	29.6
TN06	-0.01	0.011	0.004	-0.02	0.002	0.004	-0.044	0.01	0.011	0.004	0.01	18609	26.7	12673	18.2
TN09	-0.0	0.024	0.004	-0.022	0.002	0.004	-0.044	0.06	0.014	0.005	0.01	62253	89.4	18325	26.3
Mean	-0.014	0.016	0.004	-0.018	0.019	0.006	-0.05	0.041	0.015	0.005	0.011	39482.9	56.7	24698.9	35.5
Min/Max	-0.031	0.028	0.006	-0.029	0.045	0.008	-0.074	0.072	0.019	0.006	0.014	65225	93.6	44794	64.3

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	89.1	90.8	84.5	90.7	88.5
considering satellites with dual-frequency fixed	85.1	86.6	78.5	86.8	86.7
considering all signals separately	85.3	86.6	78.5	87.5	85.1