

summary for network NT32

timeperiod chosen: from 2025-09-22-00:00:00 until 2025-09-22-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.8 seconds


average fixing percentage with threshold set to 0.3: 90.3 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

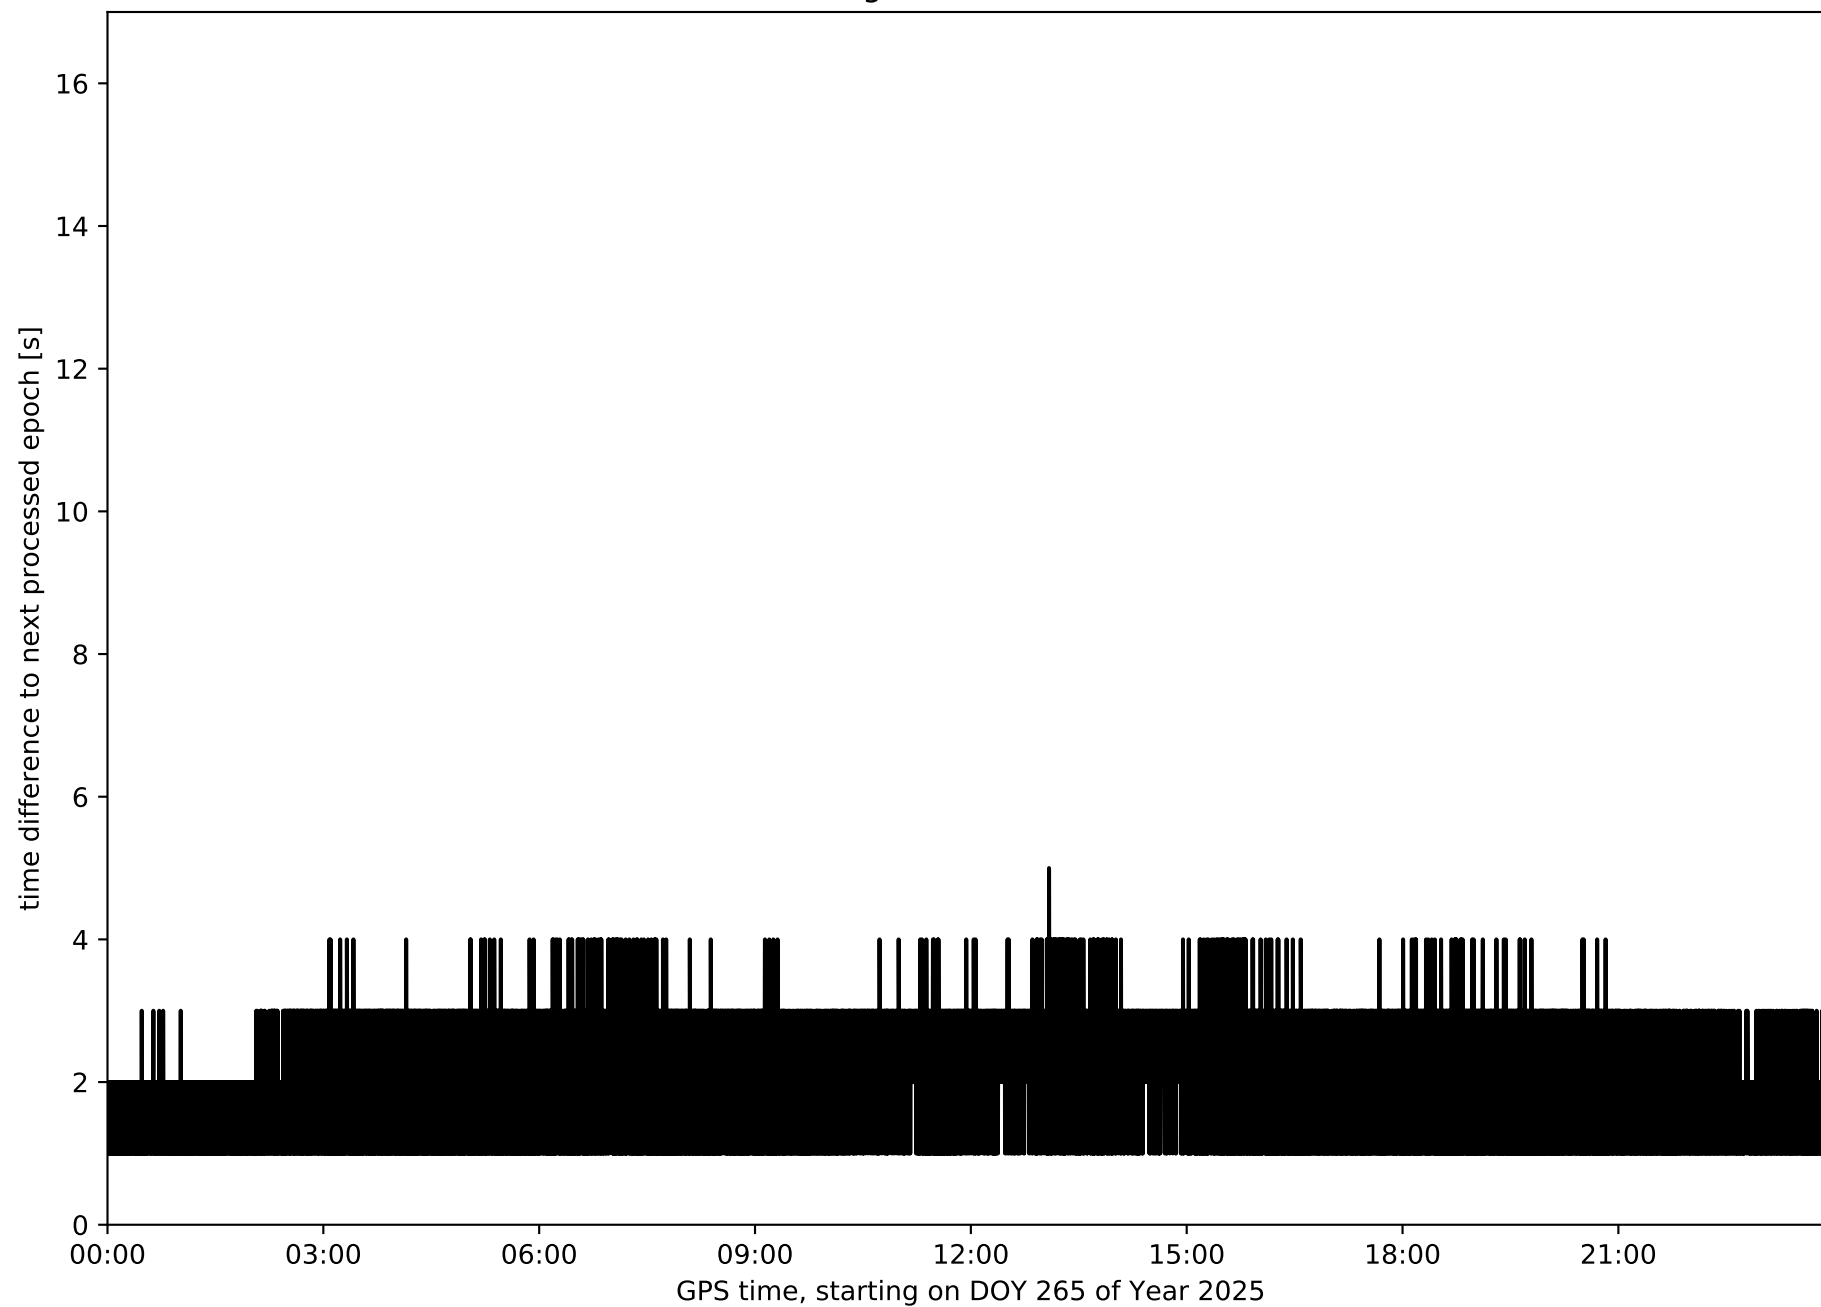


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

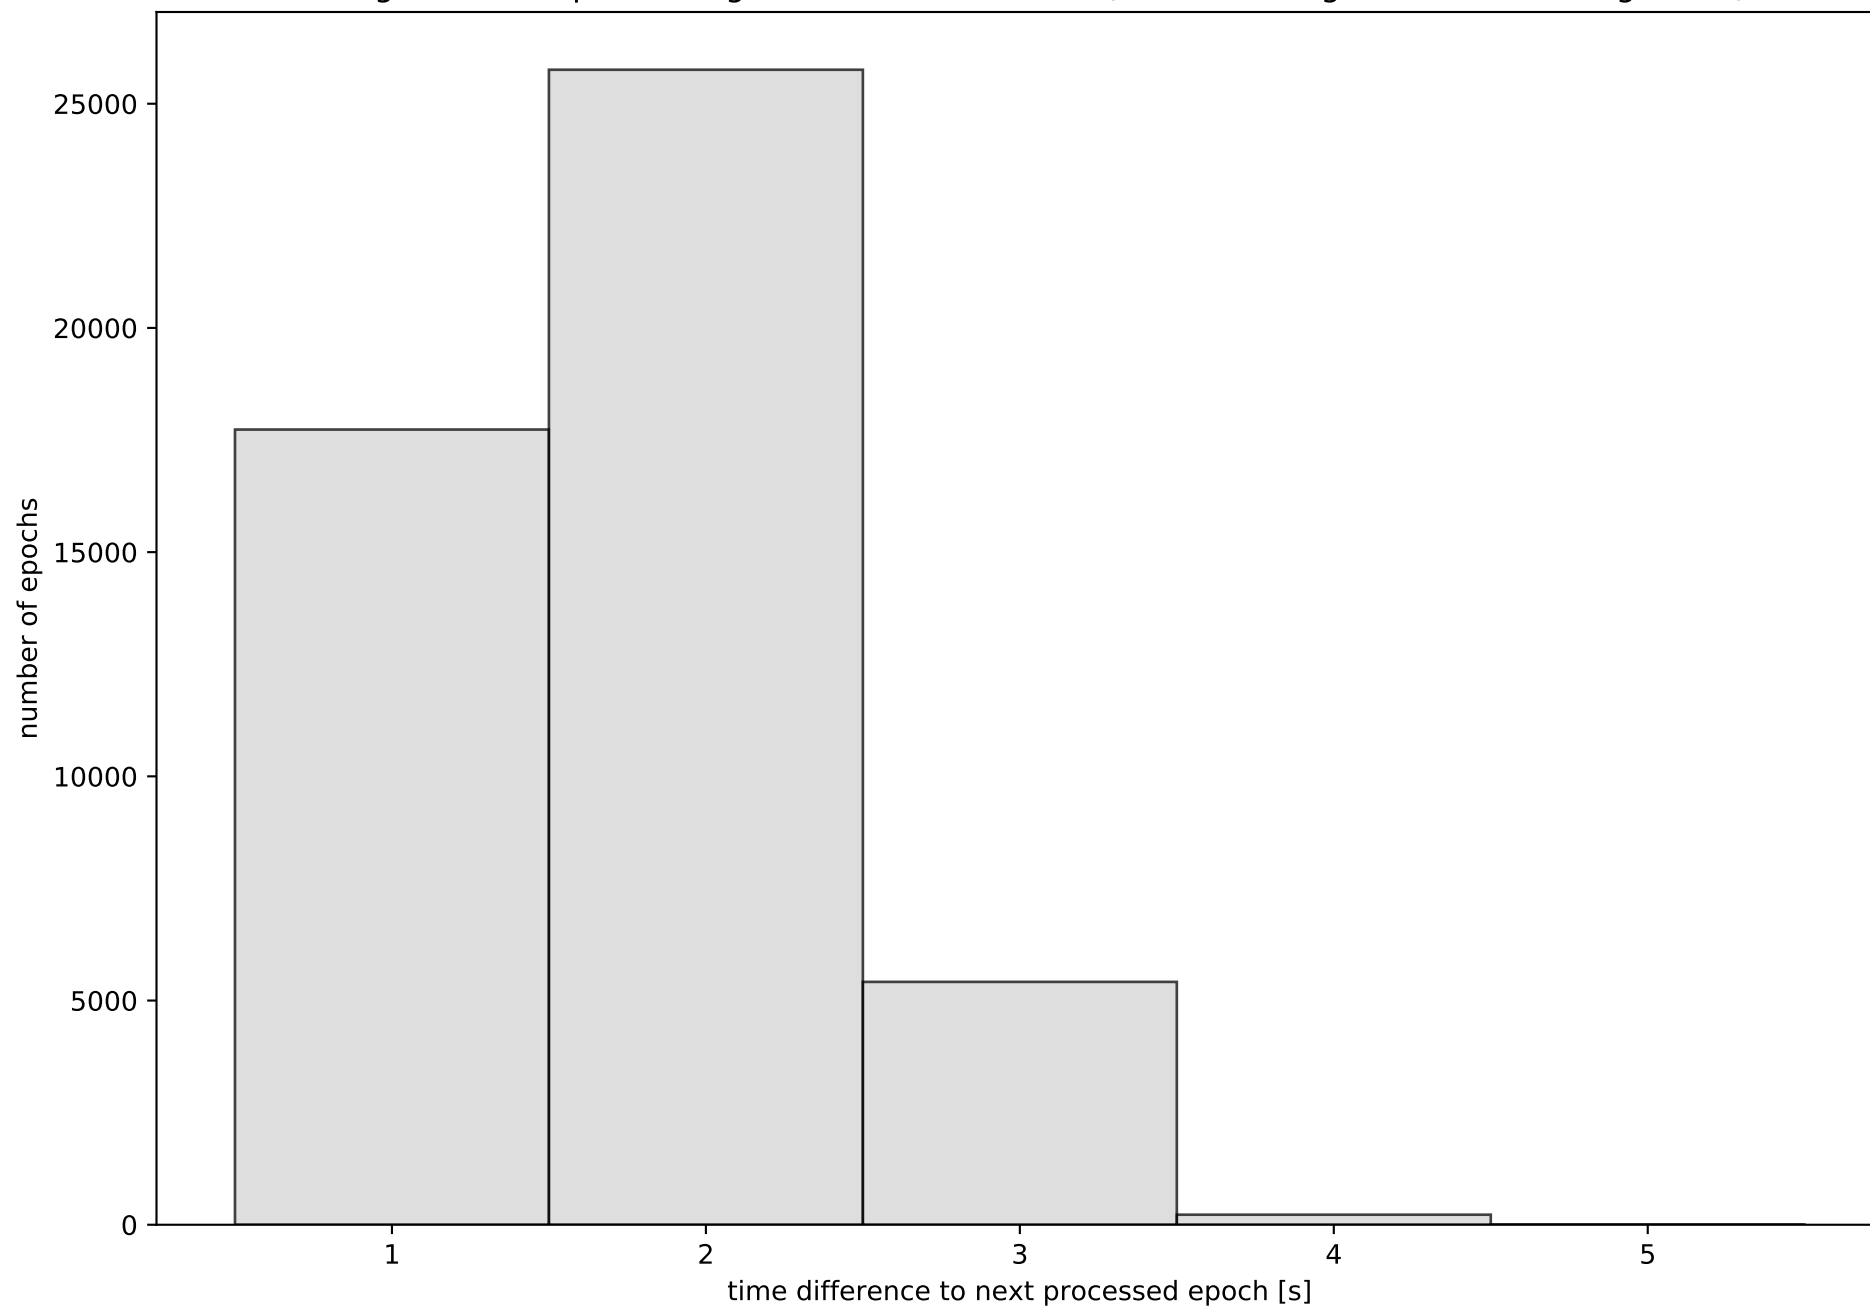


Network NT32 with threshold set to 0.3

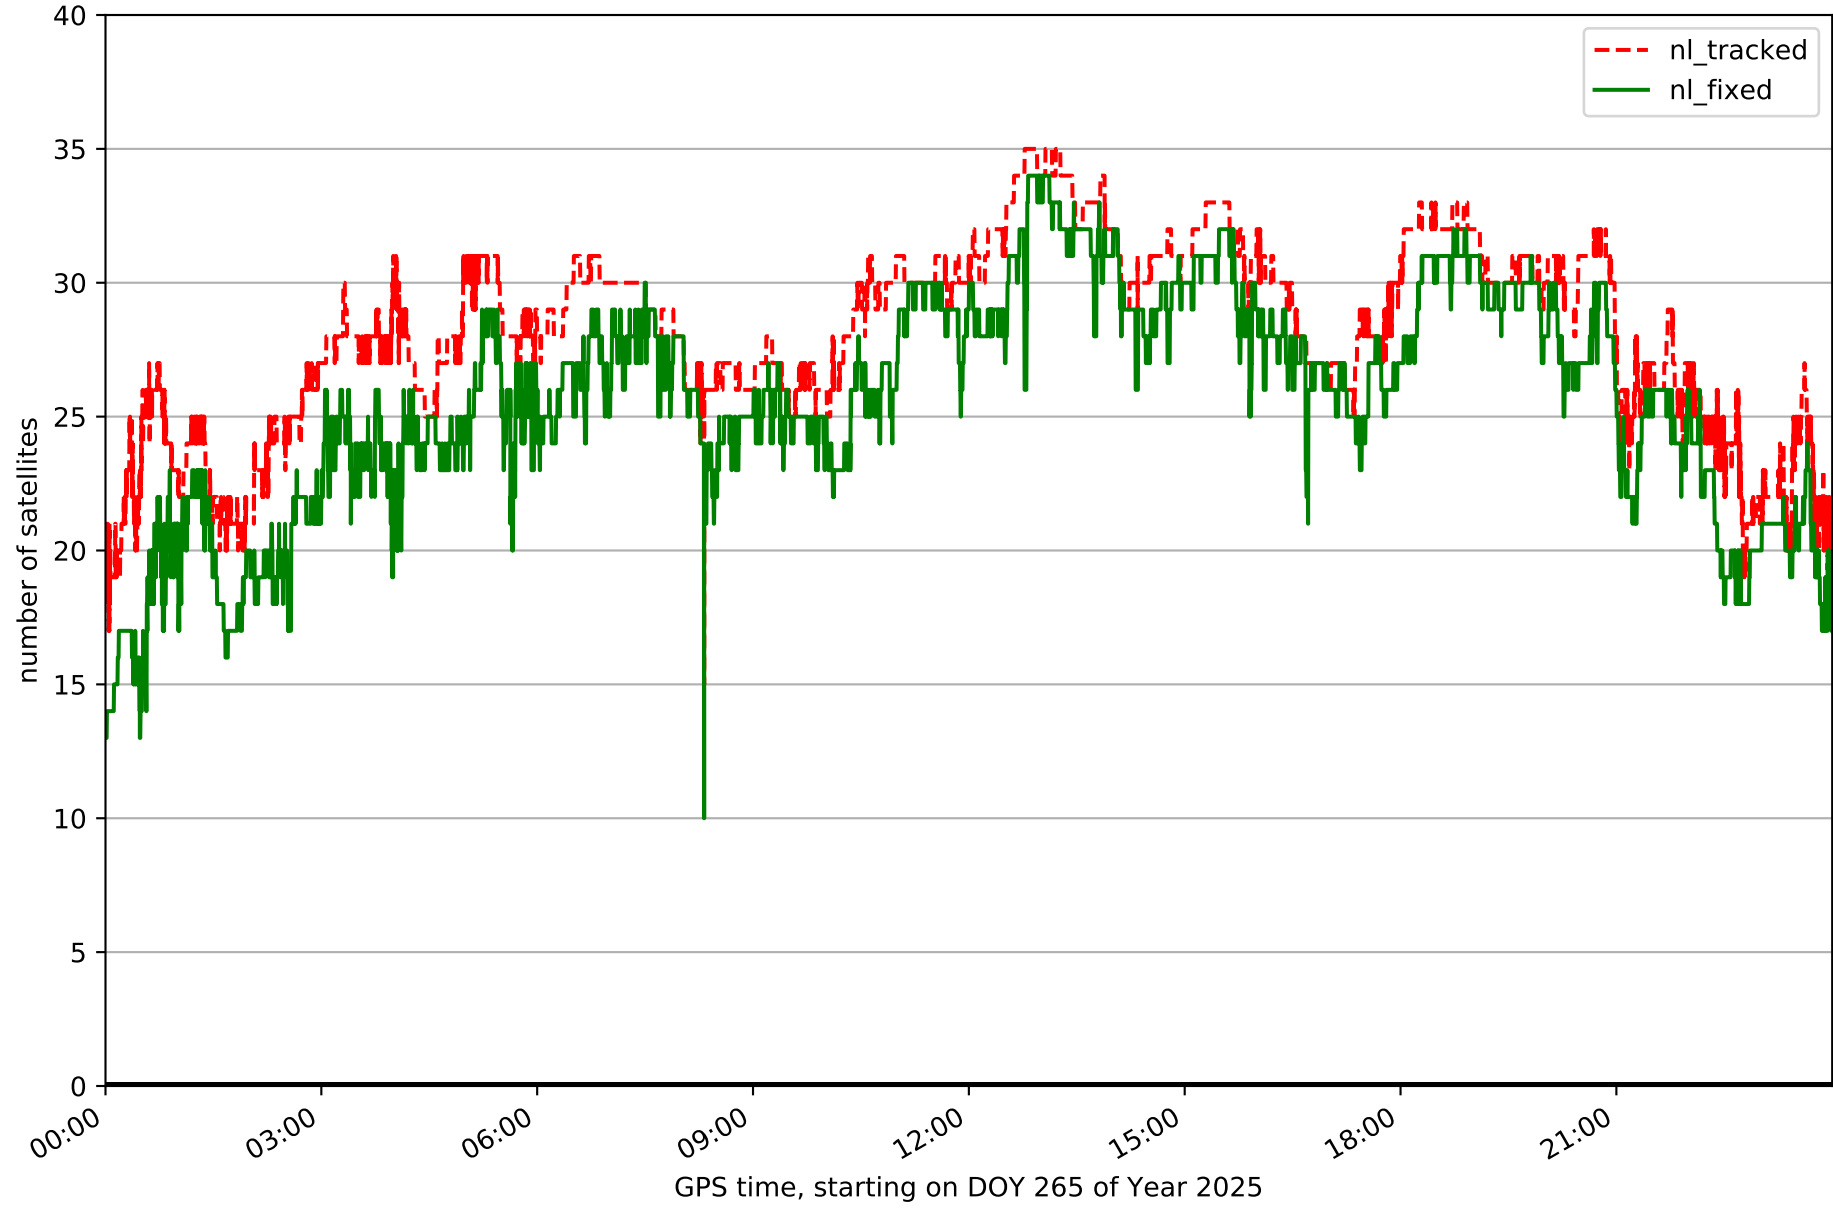


Fixing percentage of satellites in network NT32 with threshold set to 0.3

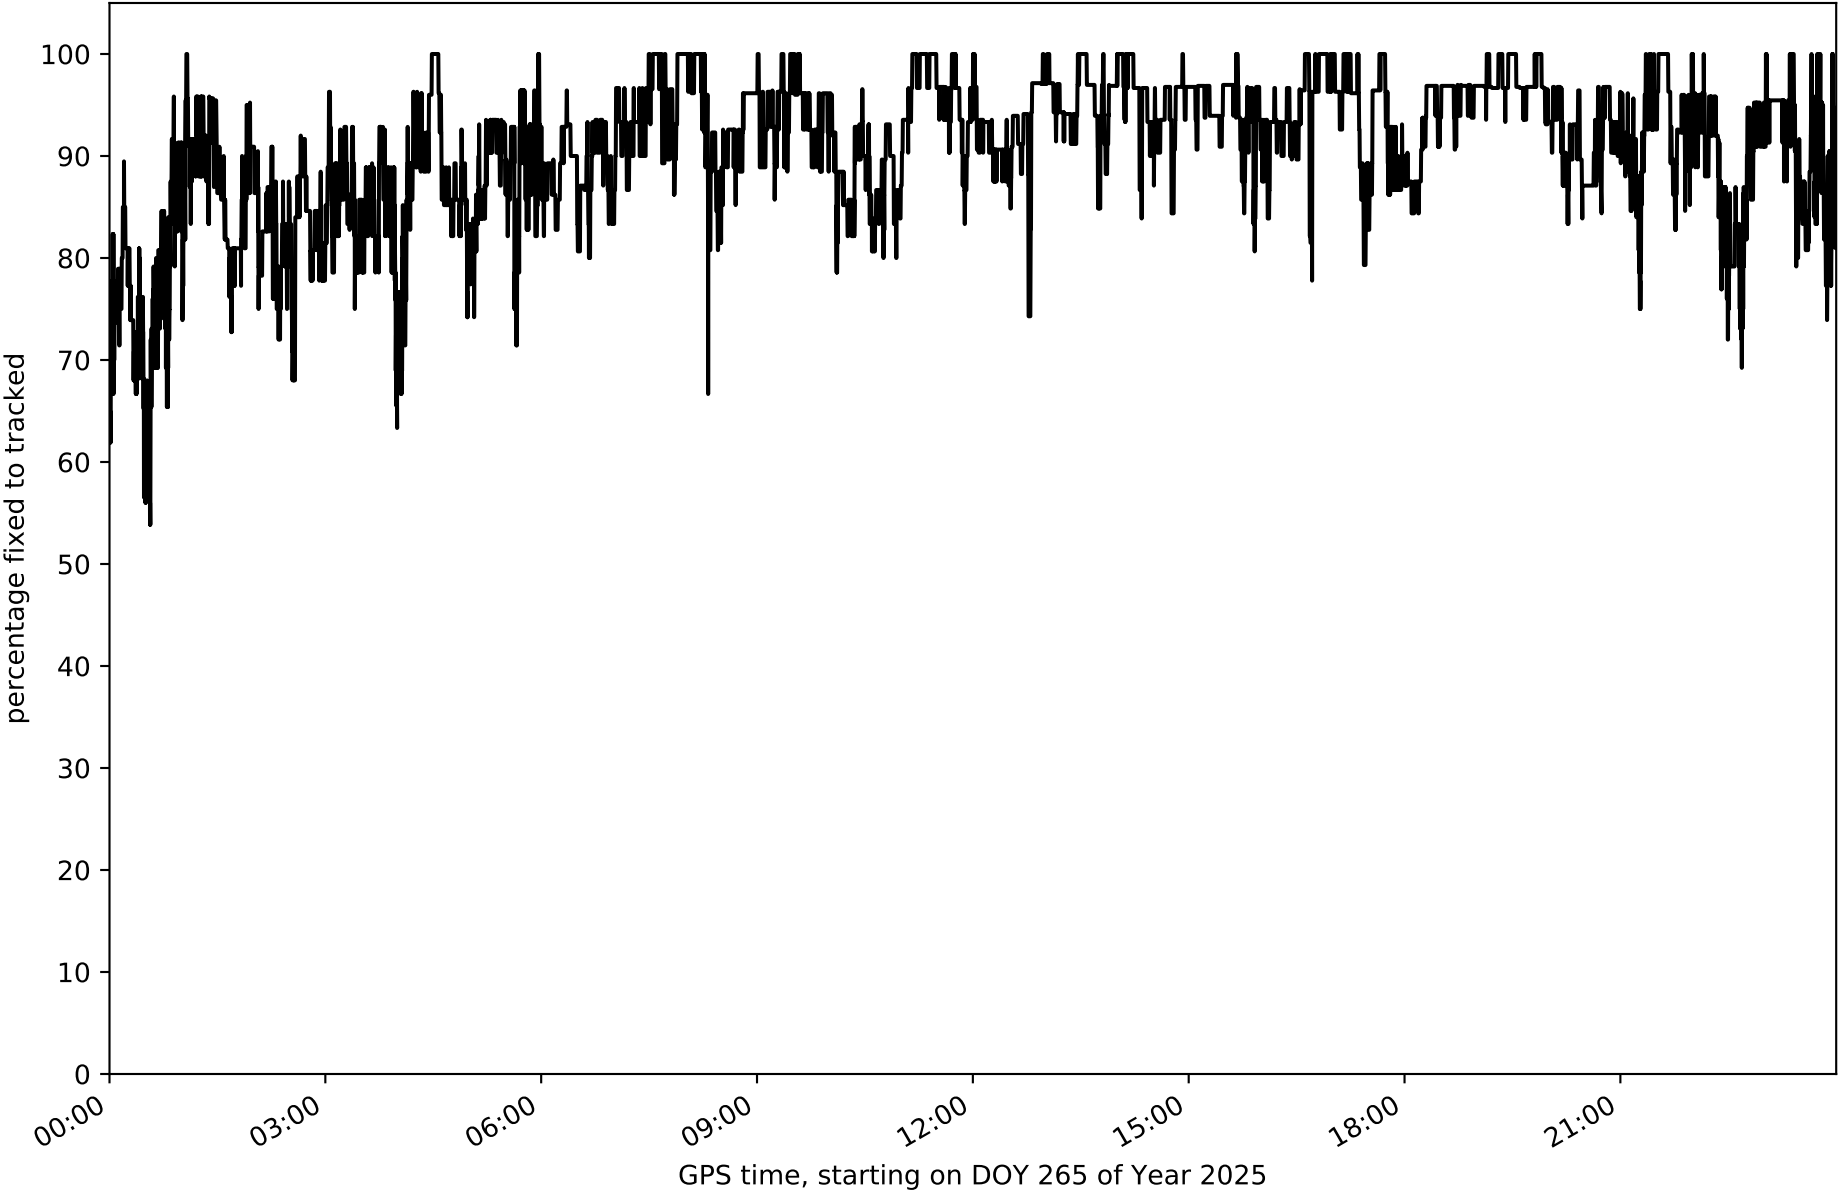


Network NT32 - only GPS with threshold set to 0.3

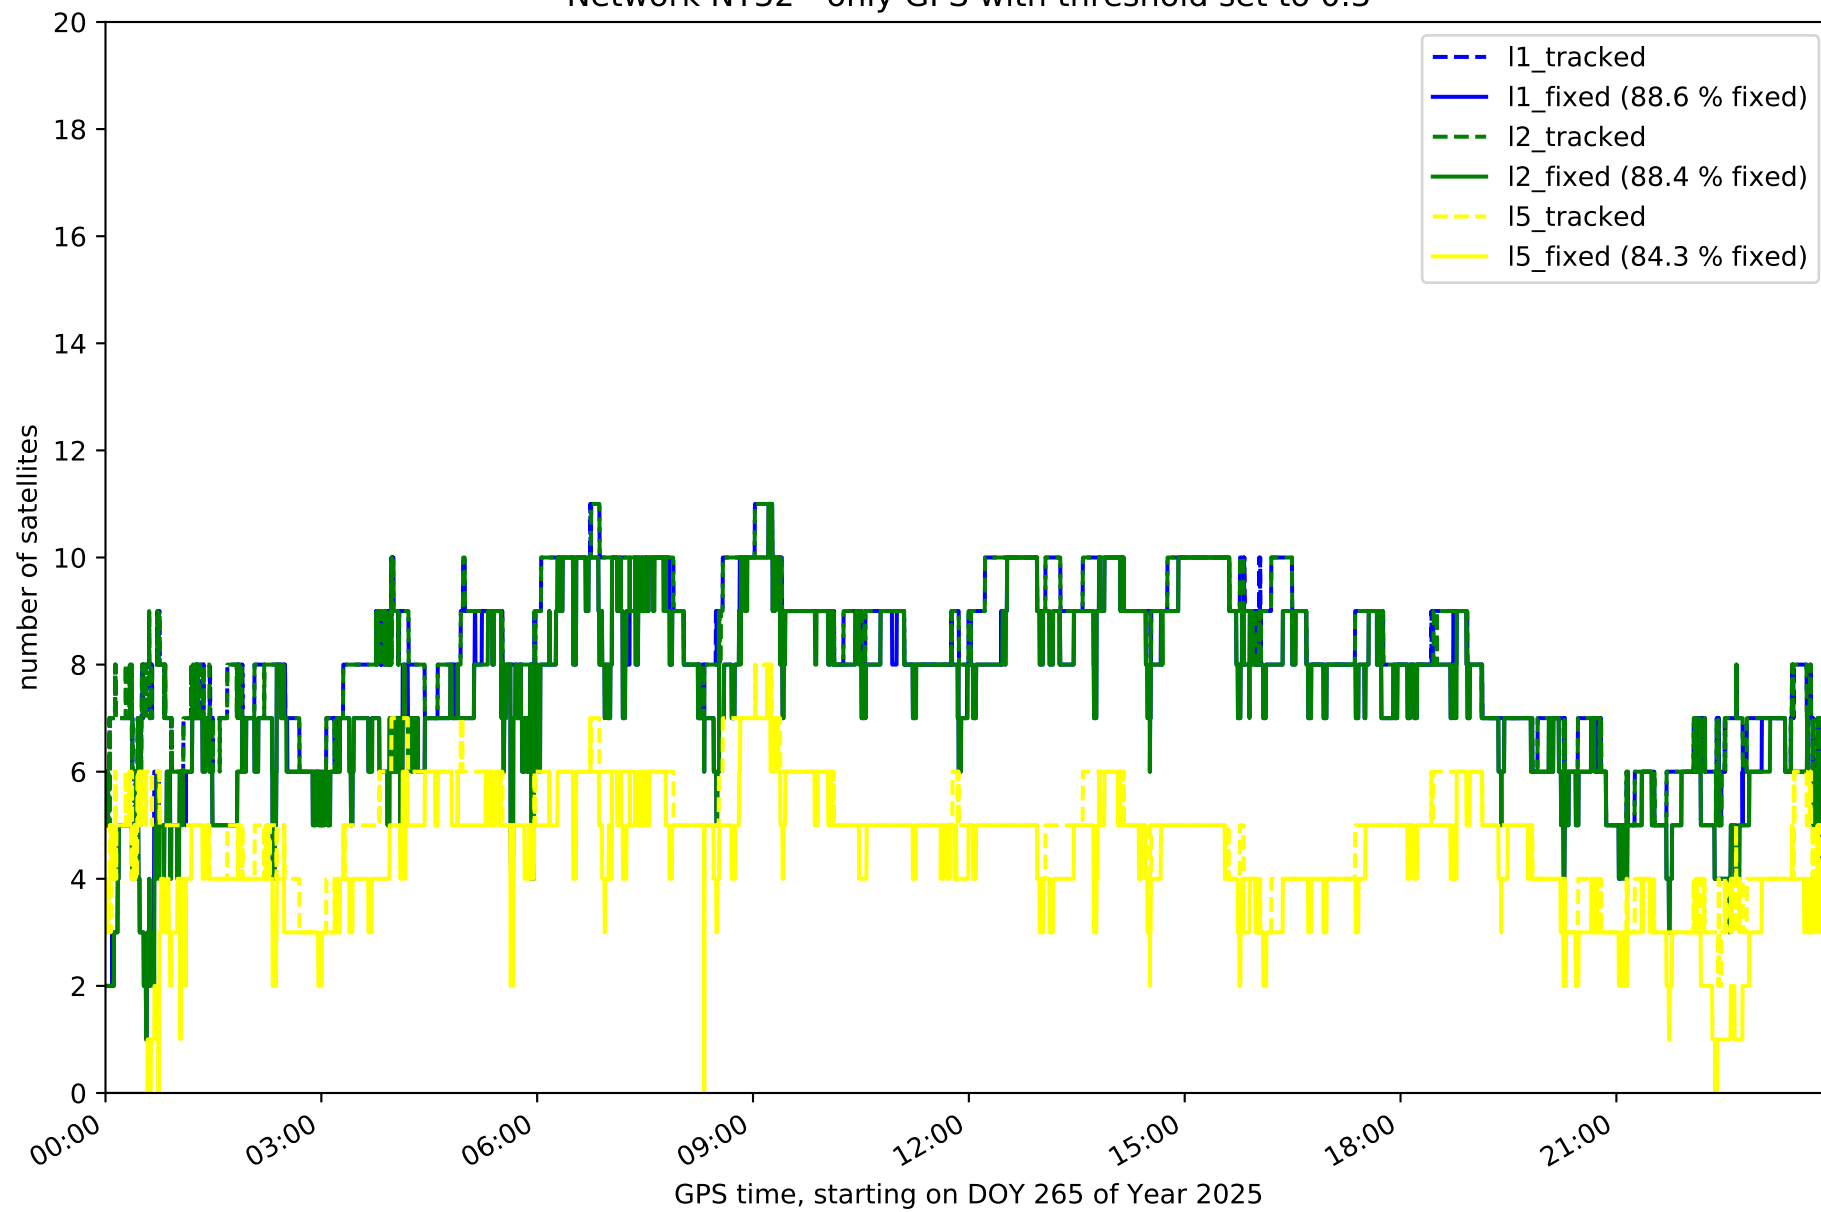


Network NT32 - only GLONASS with threshold set to 0.3

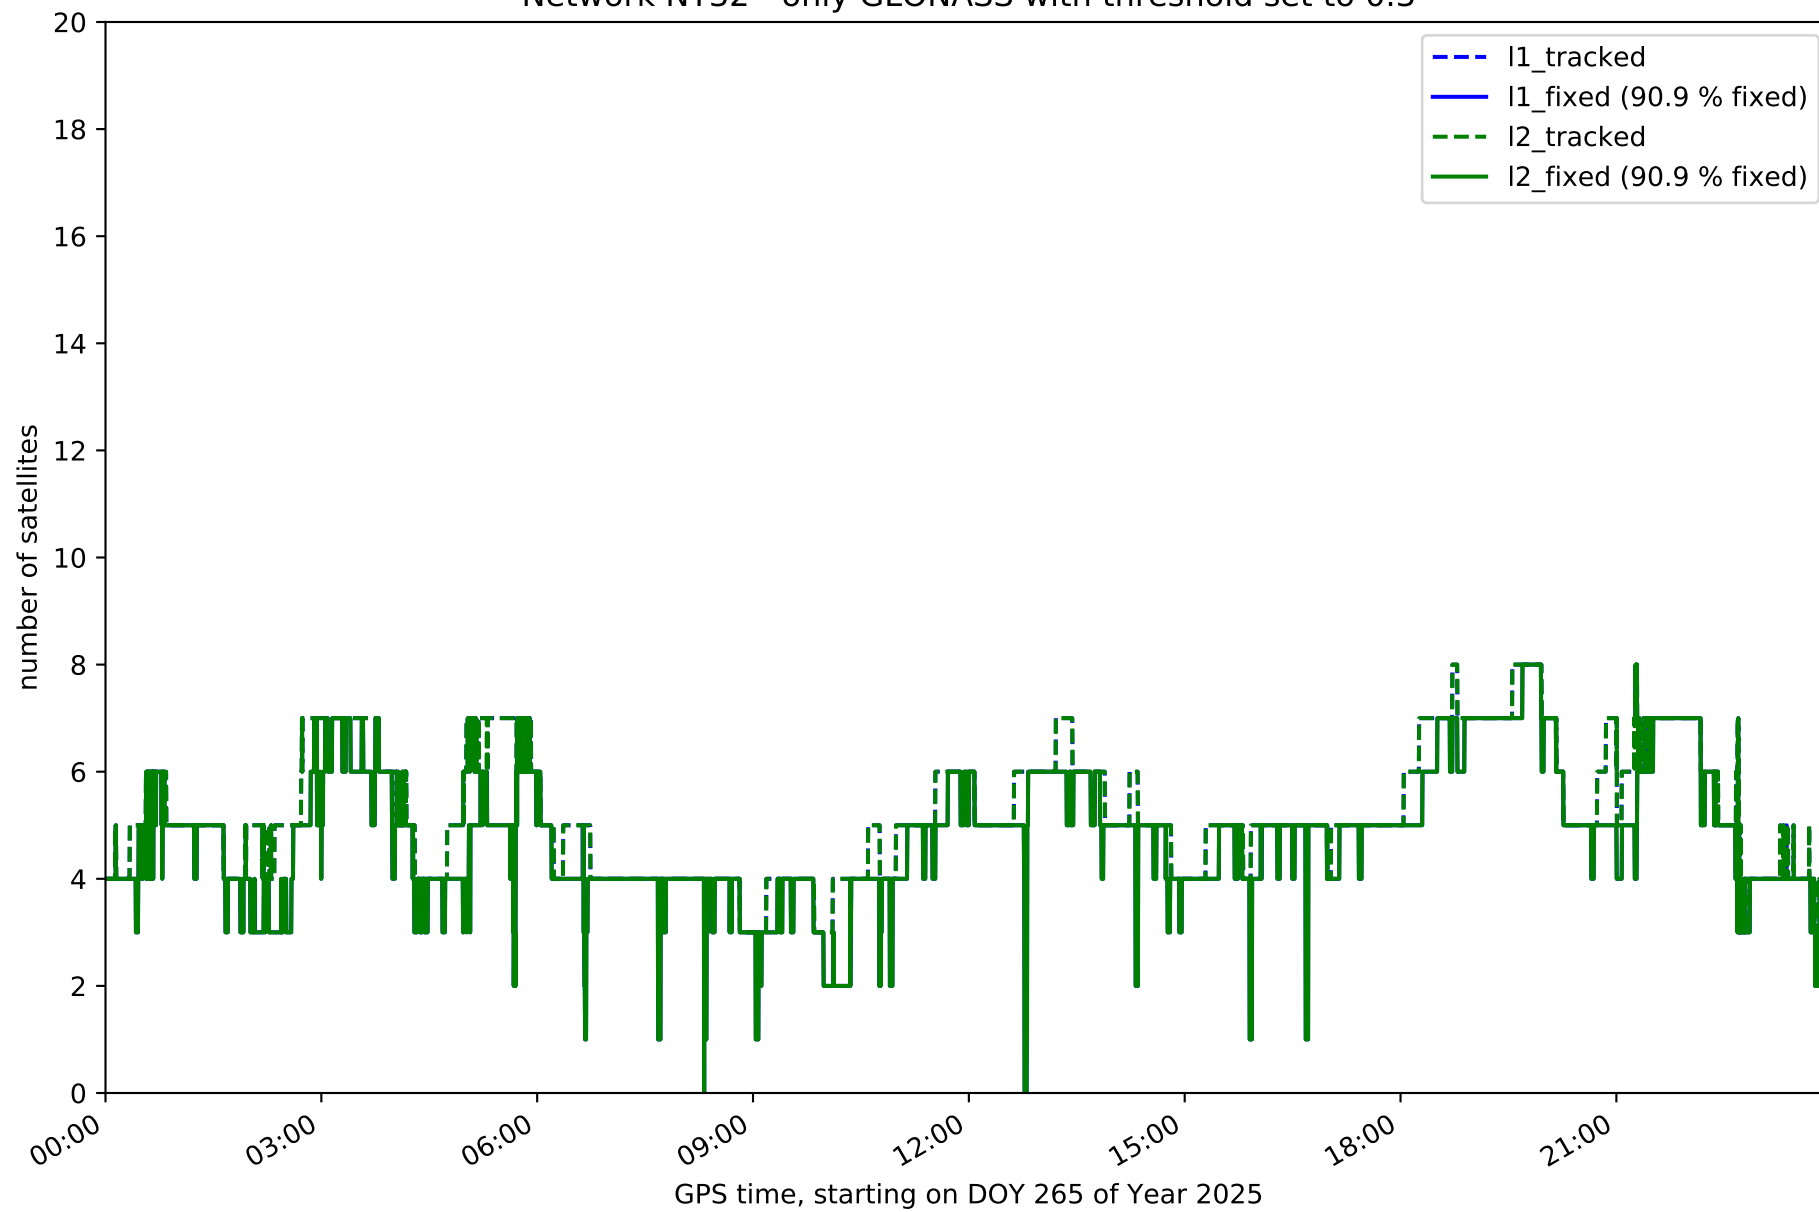


Network NT32 - only BDS with threshold set to 0.3

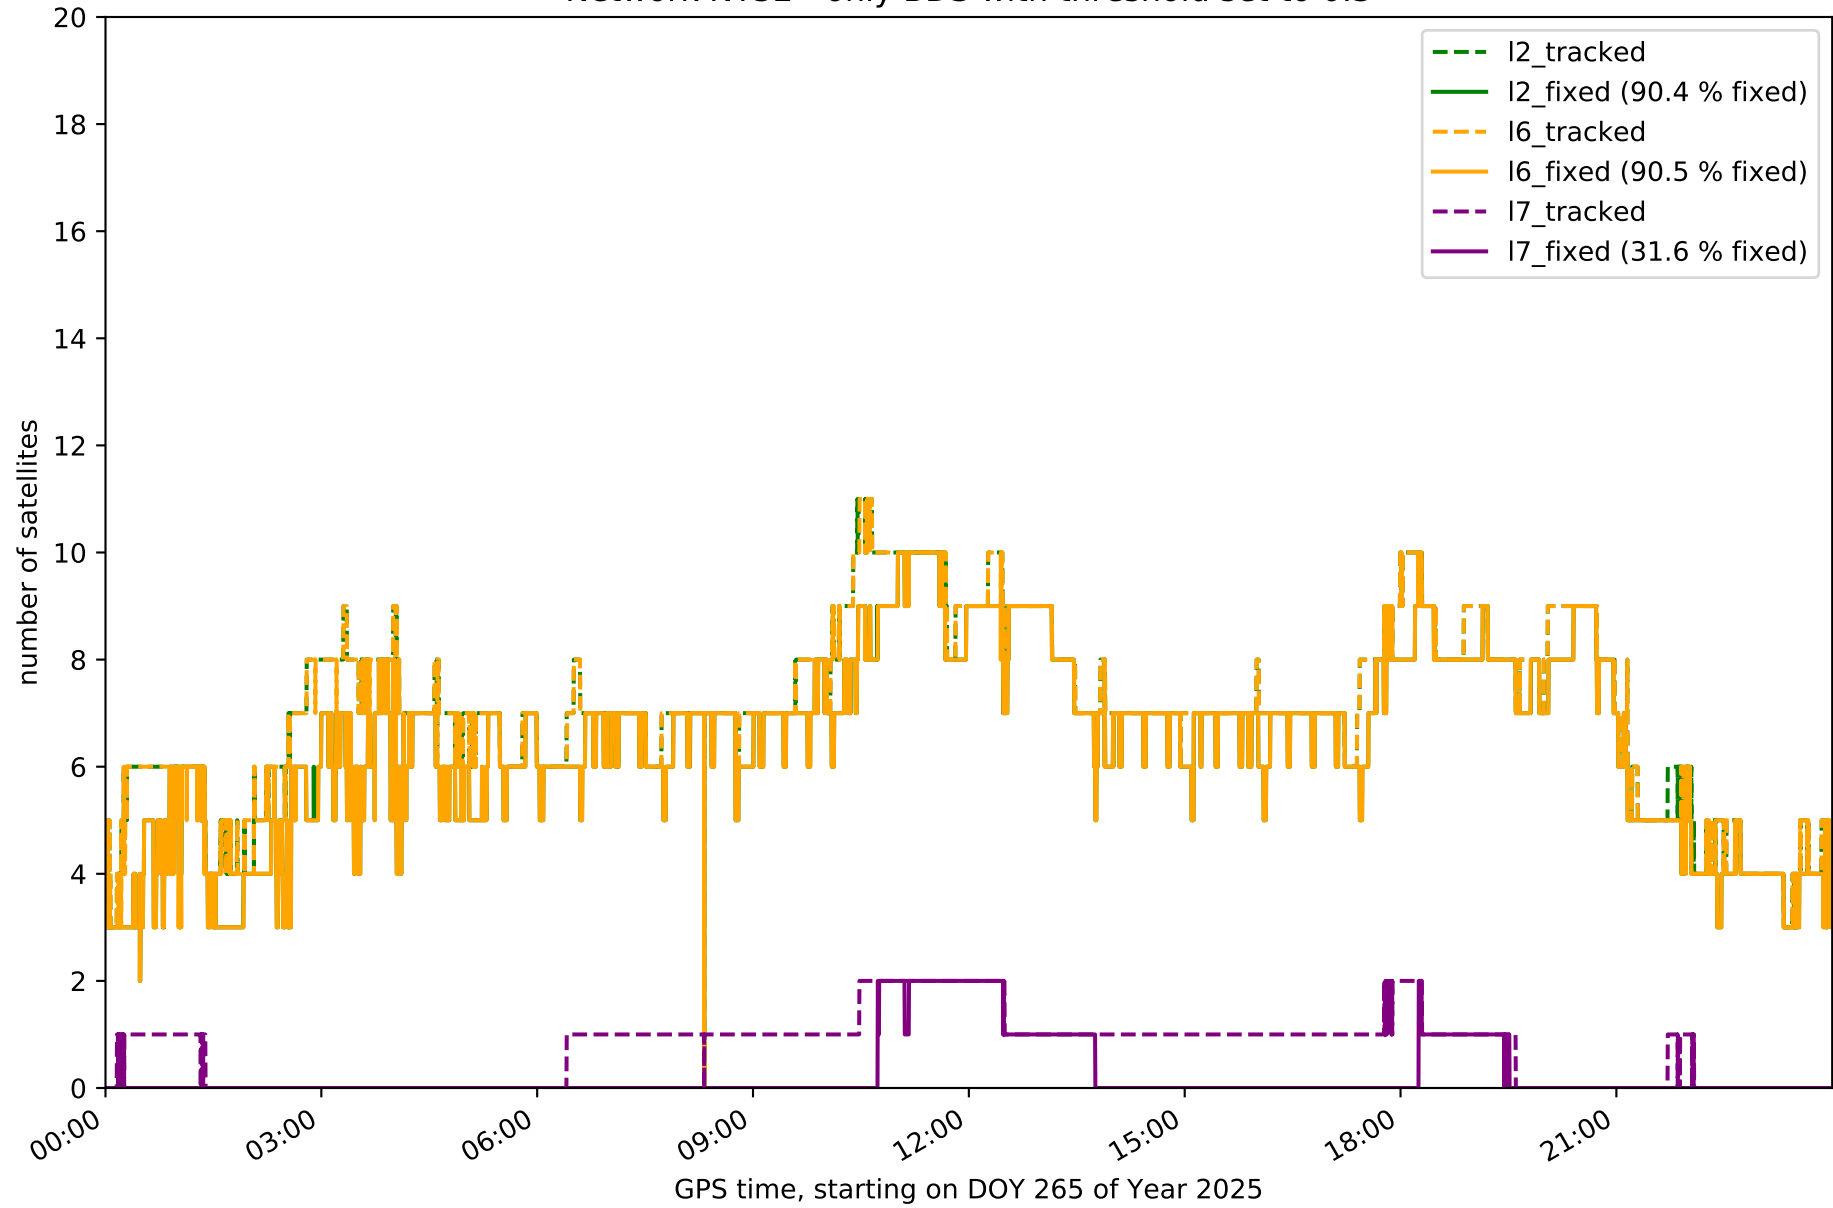


Network NT32 - only Galileo with threshold set to 0.3

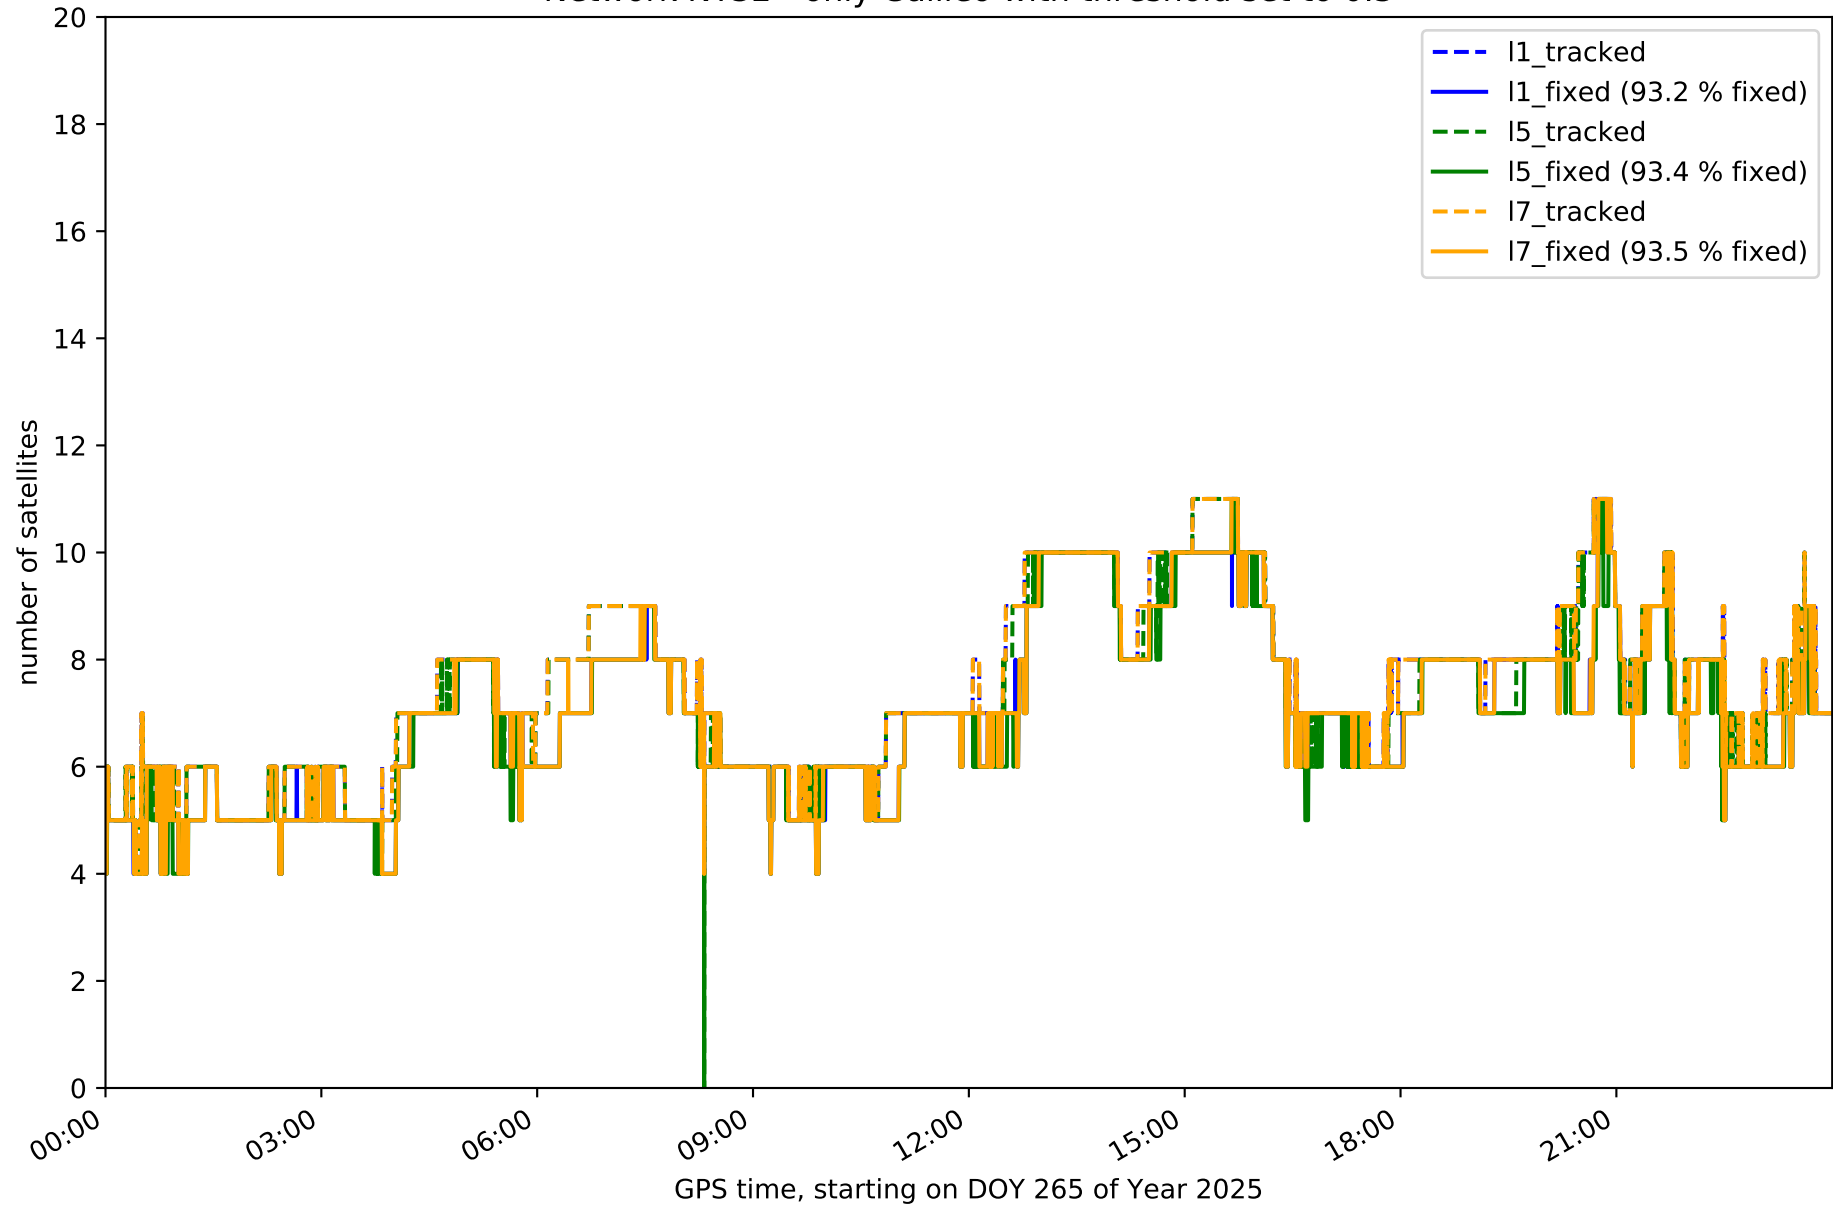


Station EH01 in network NT32

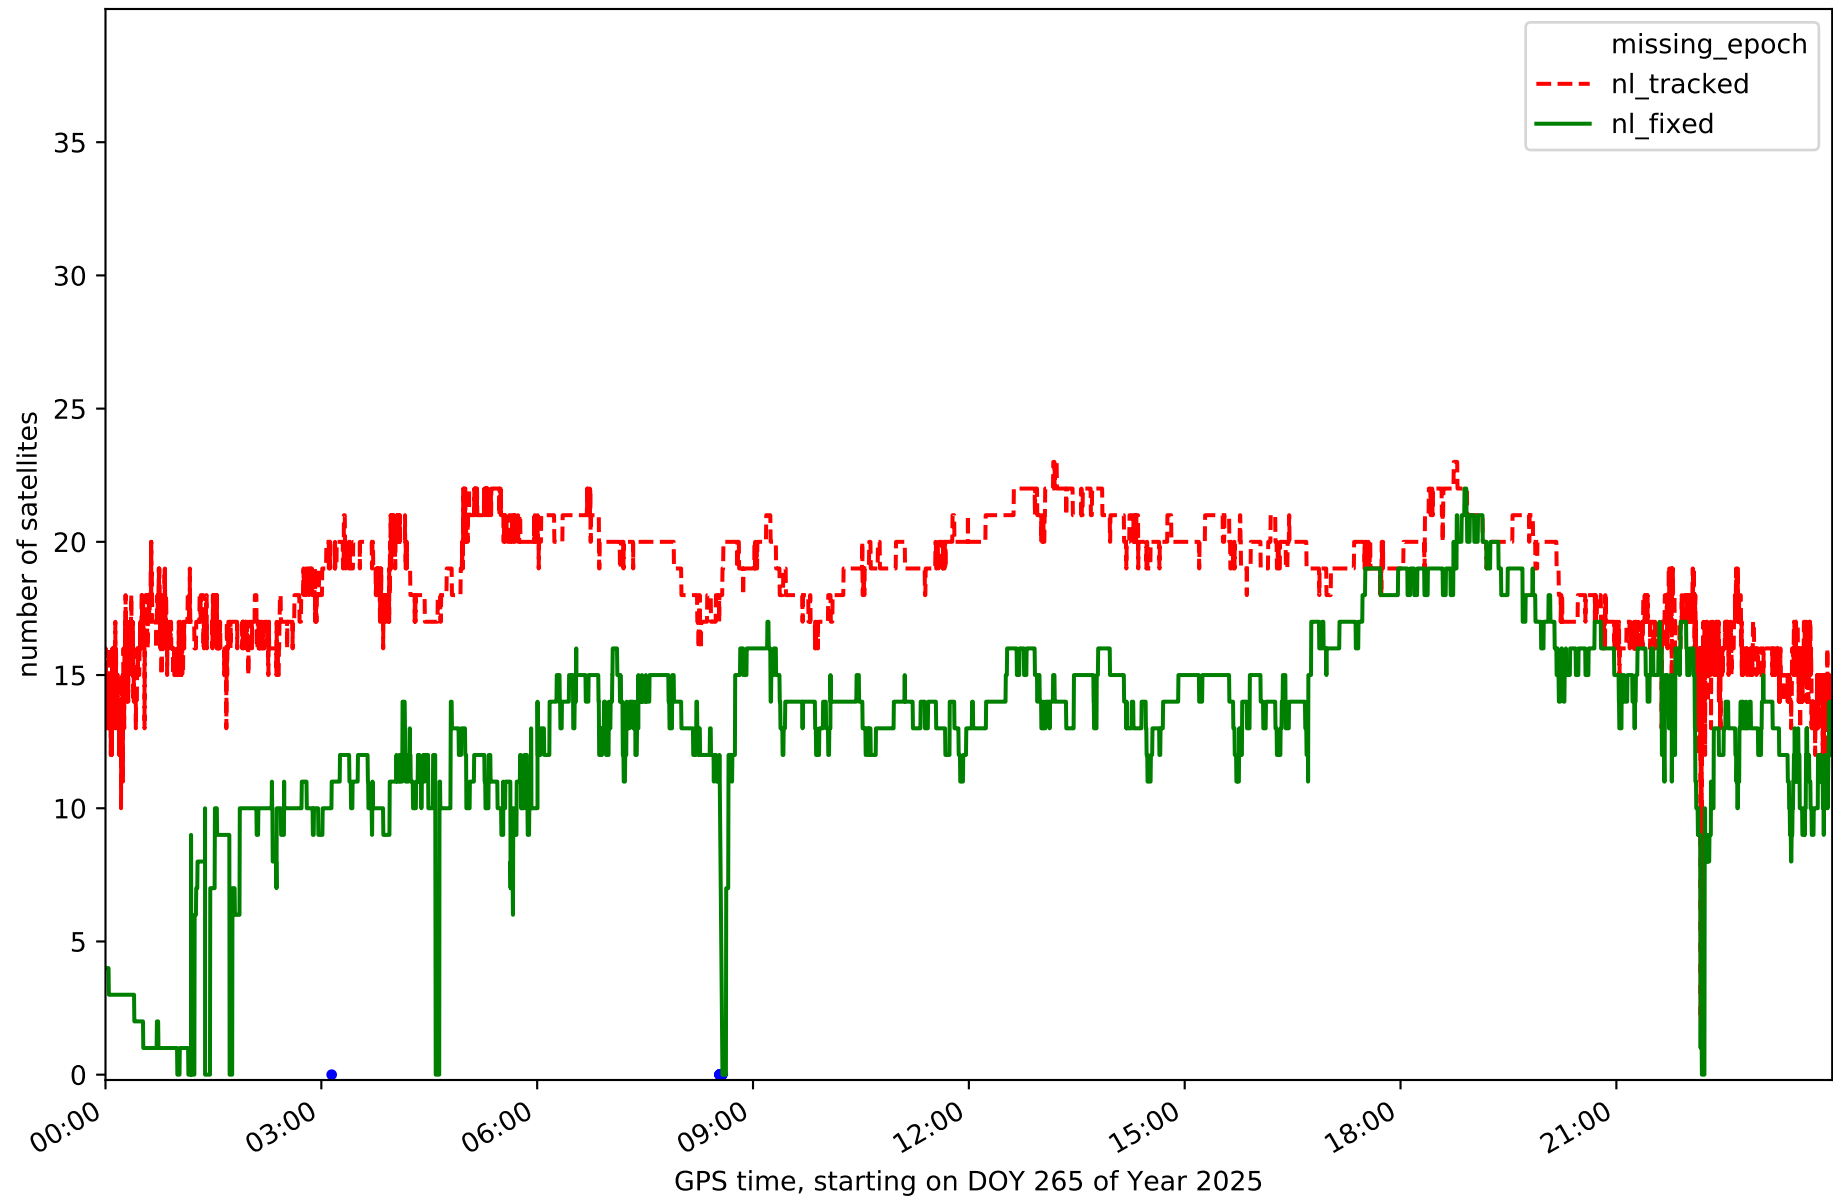


Station GOM1 in network NT32

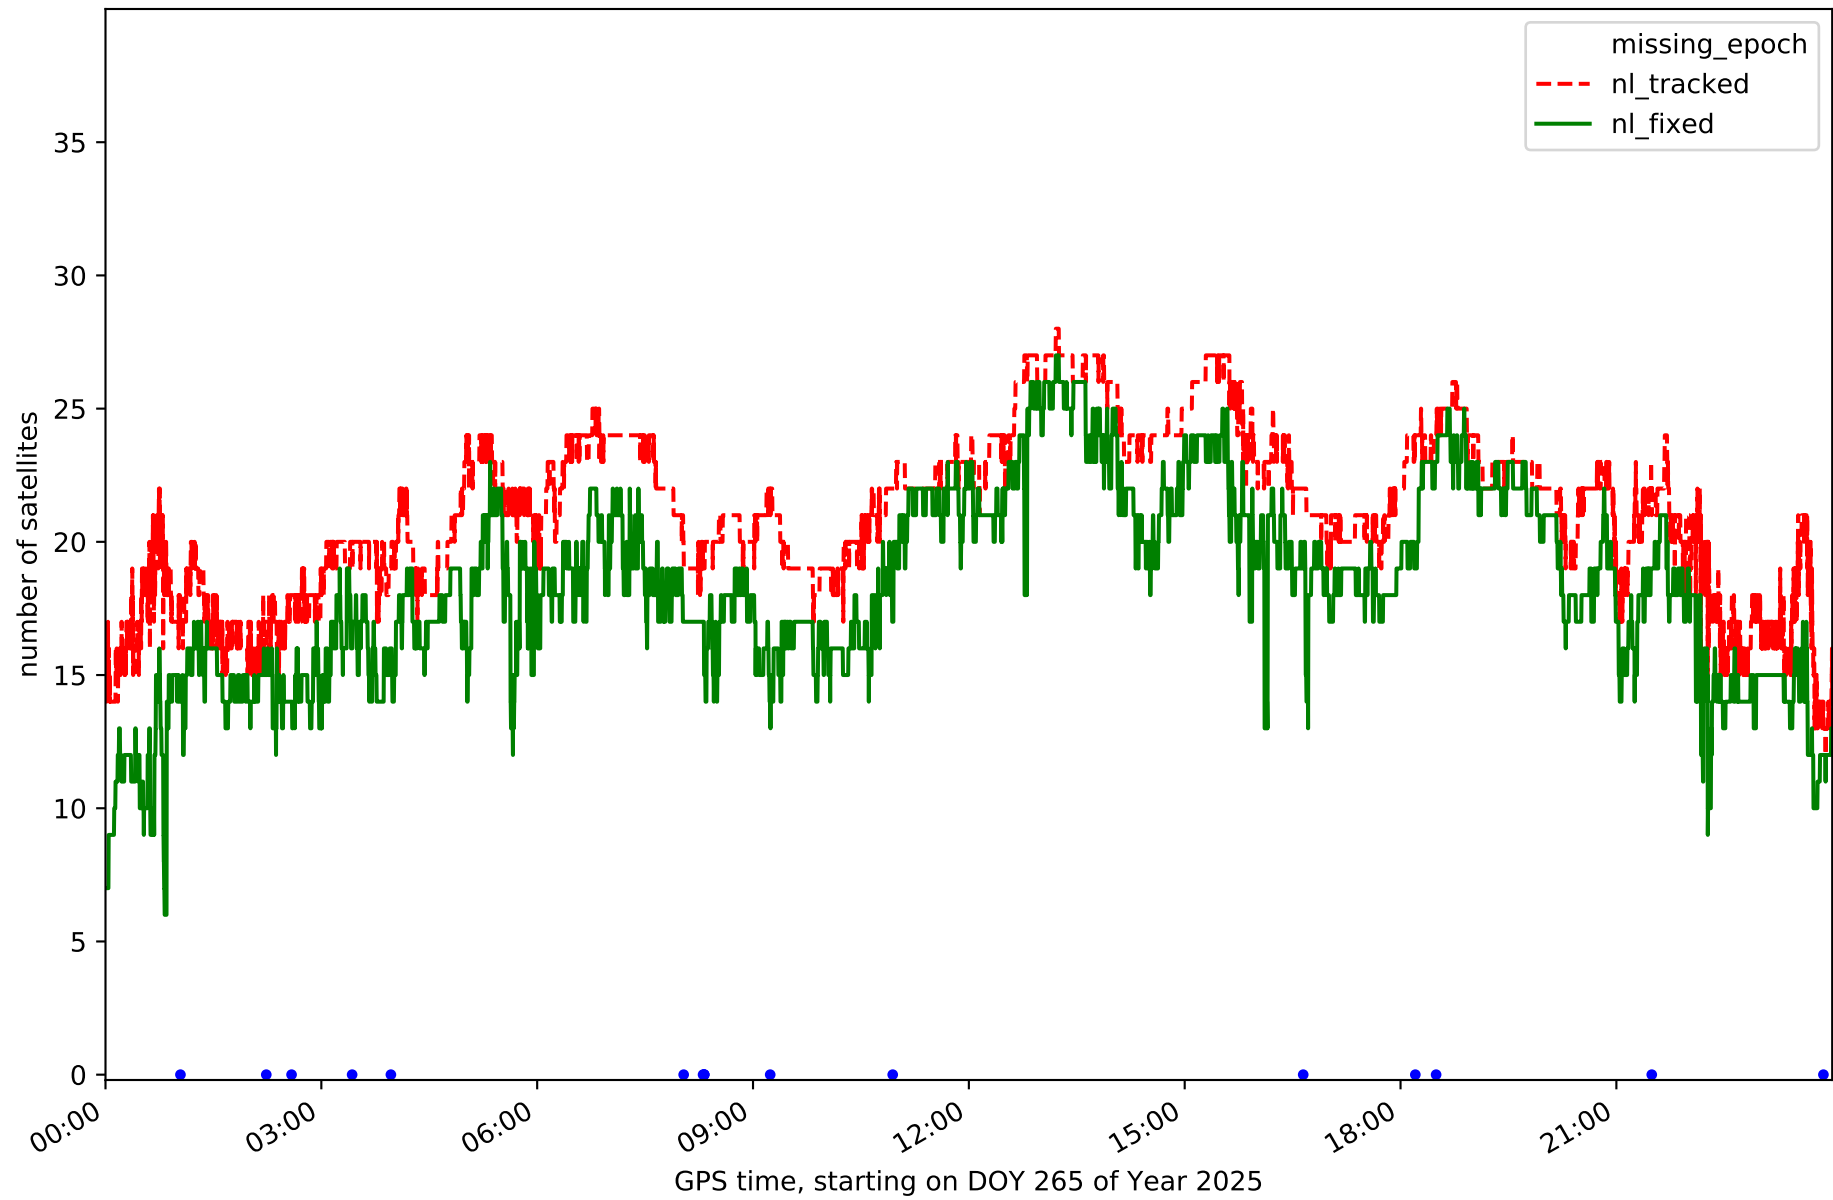


Station GOME in network NT32

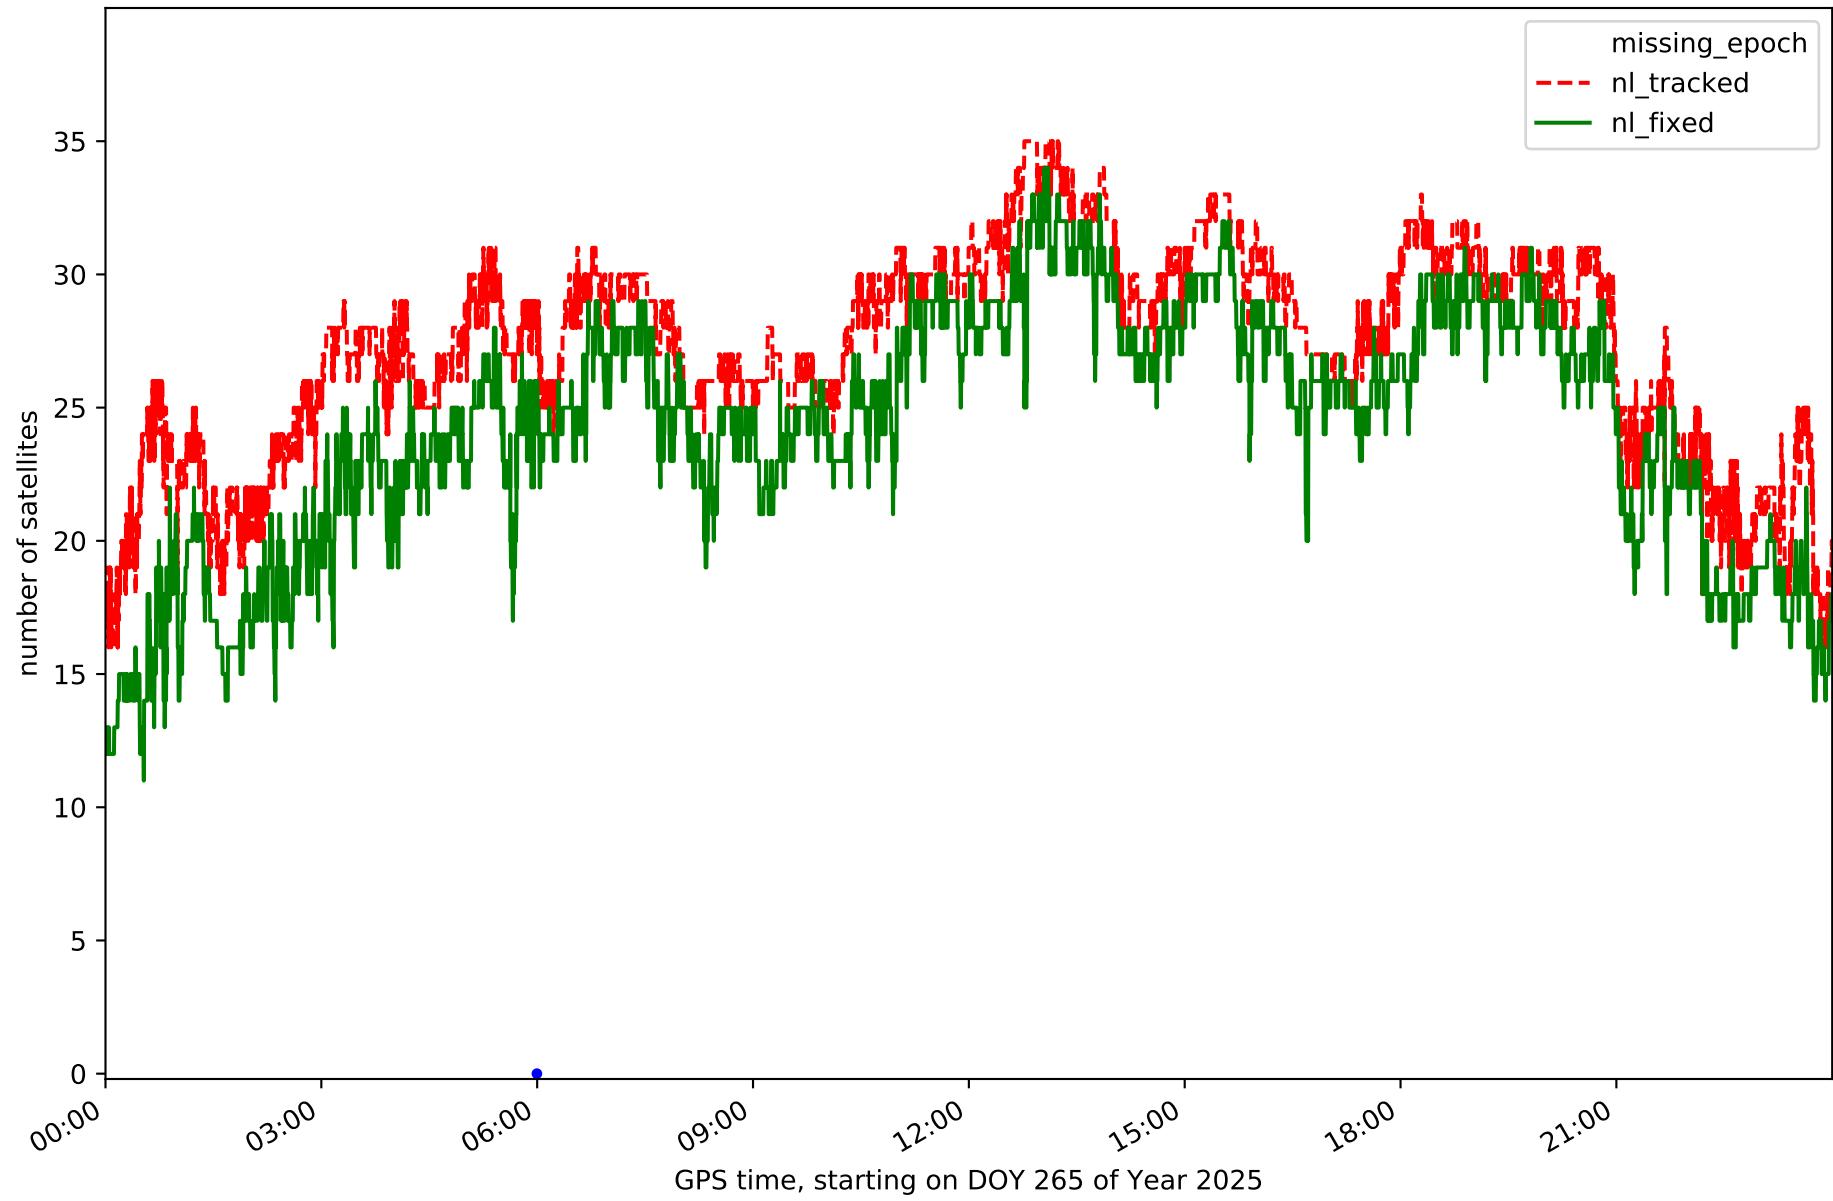


Station IZAN in network NT32

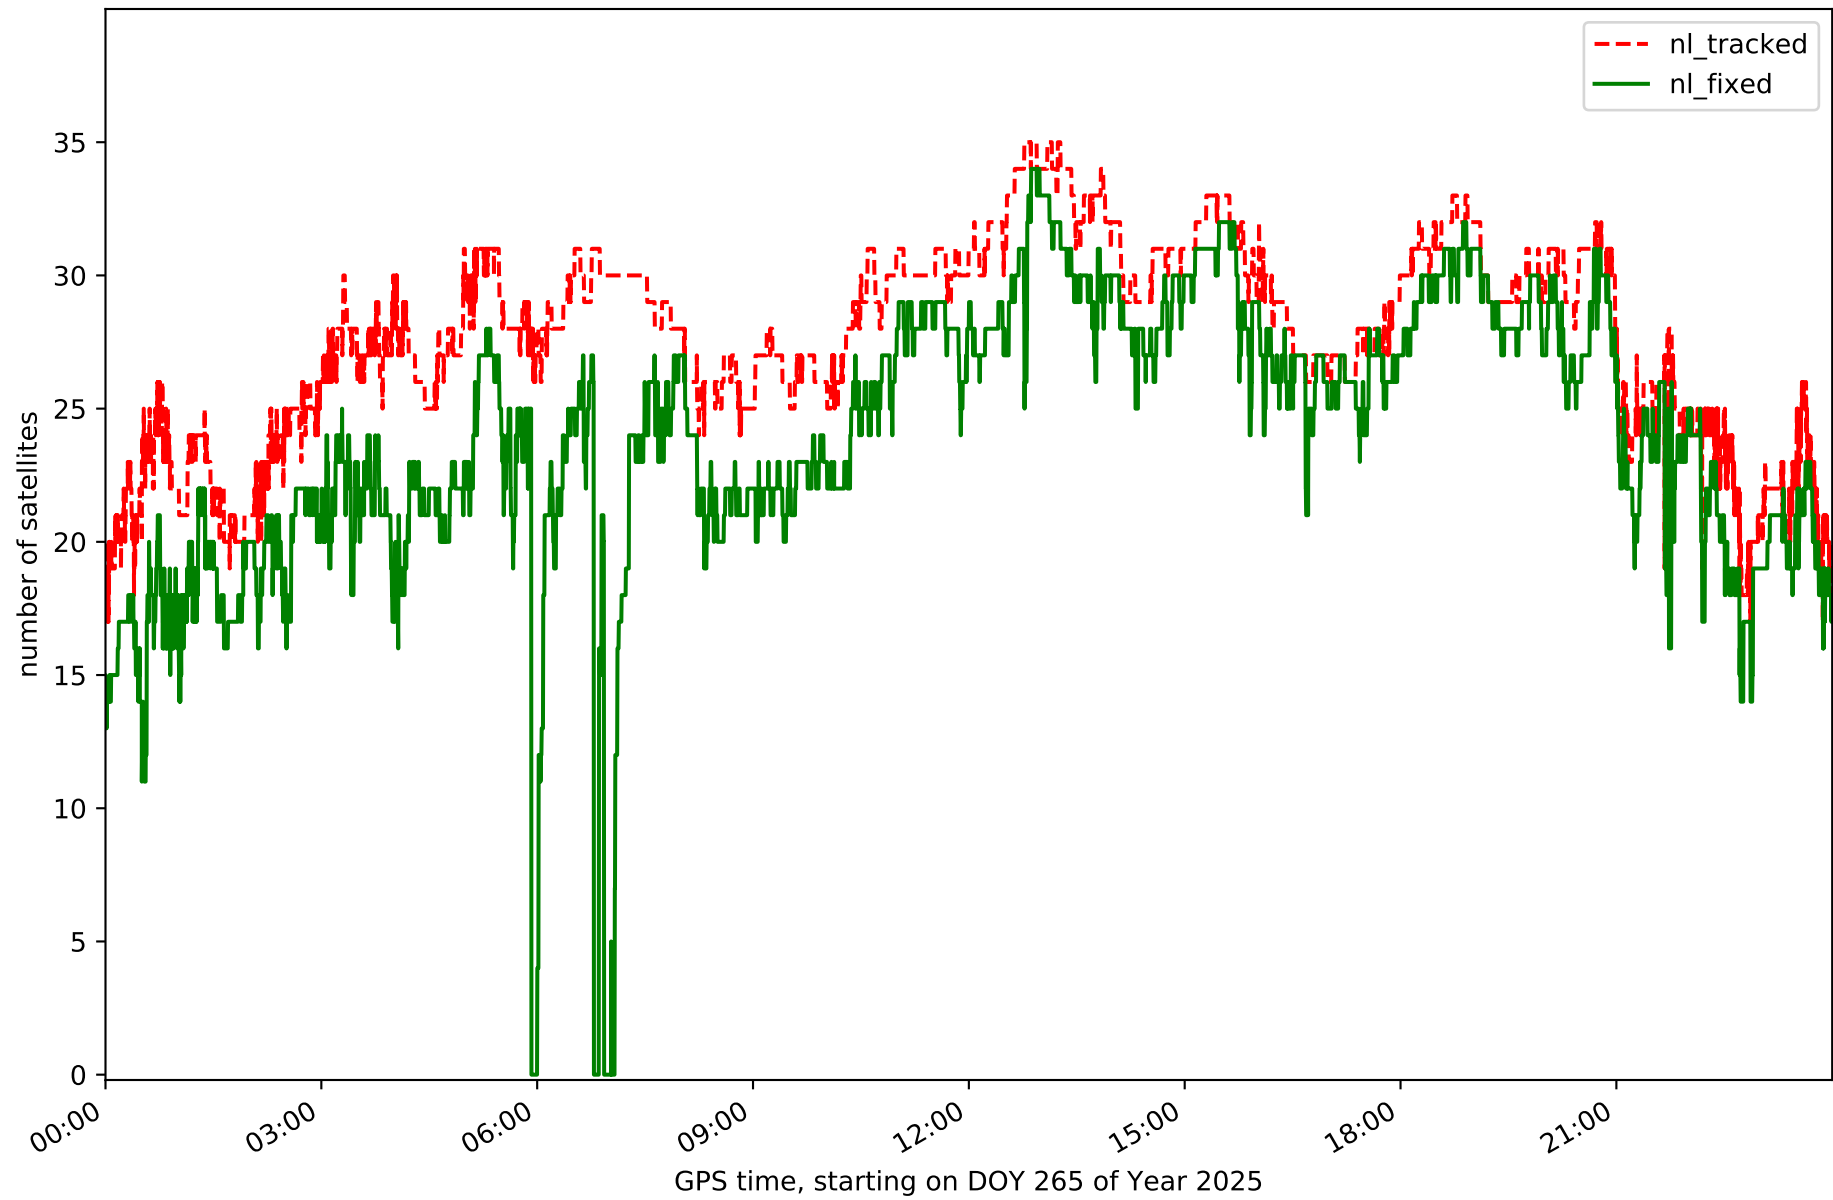


Station LP01 in network NT32

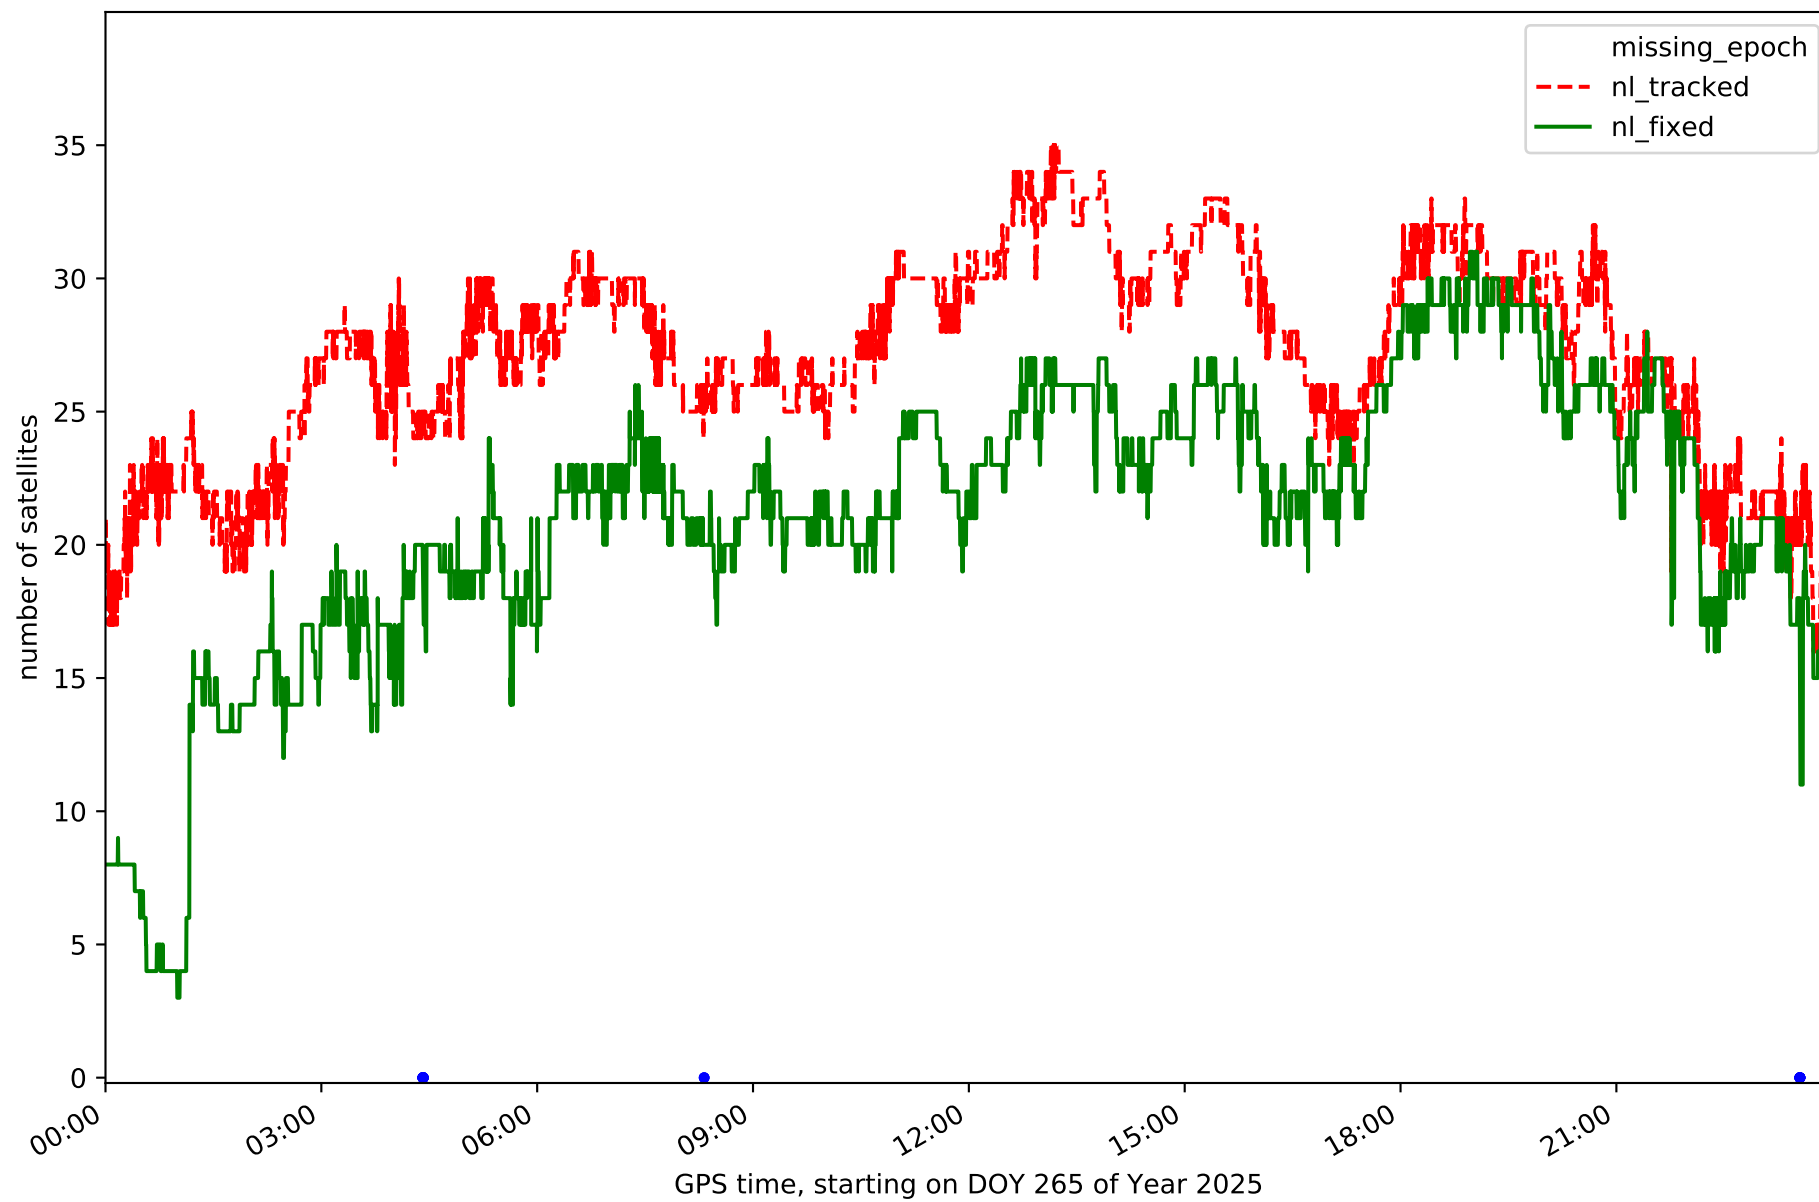


Station LP03 in network NT32

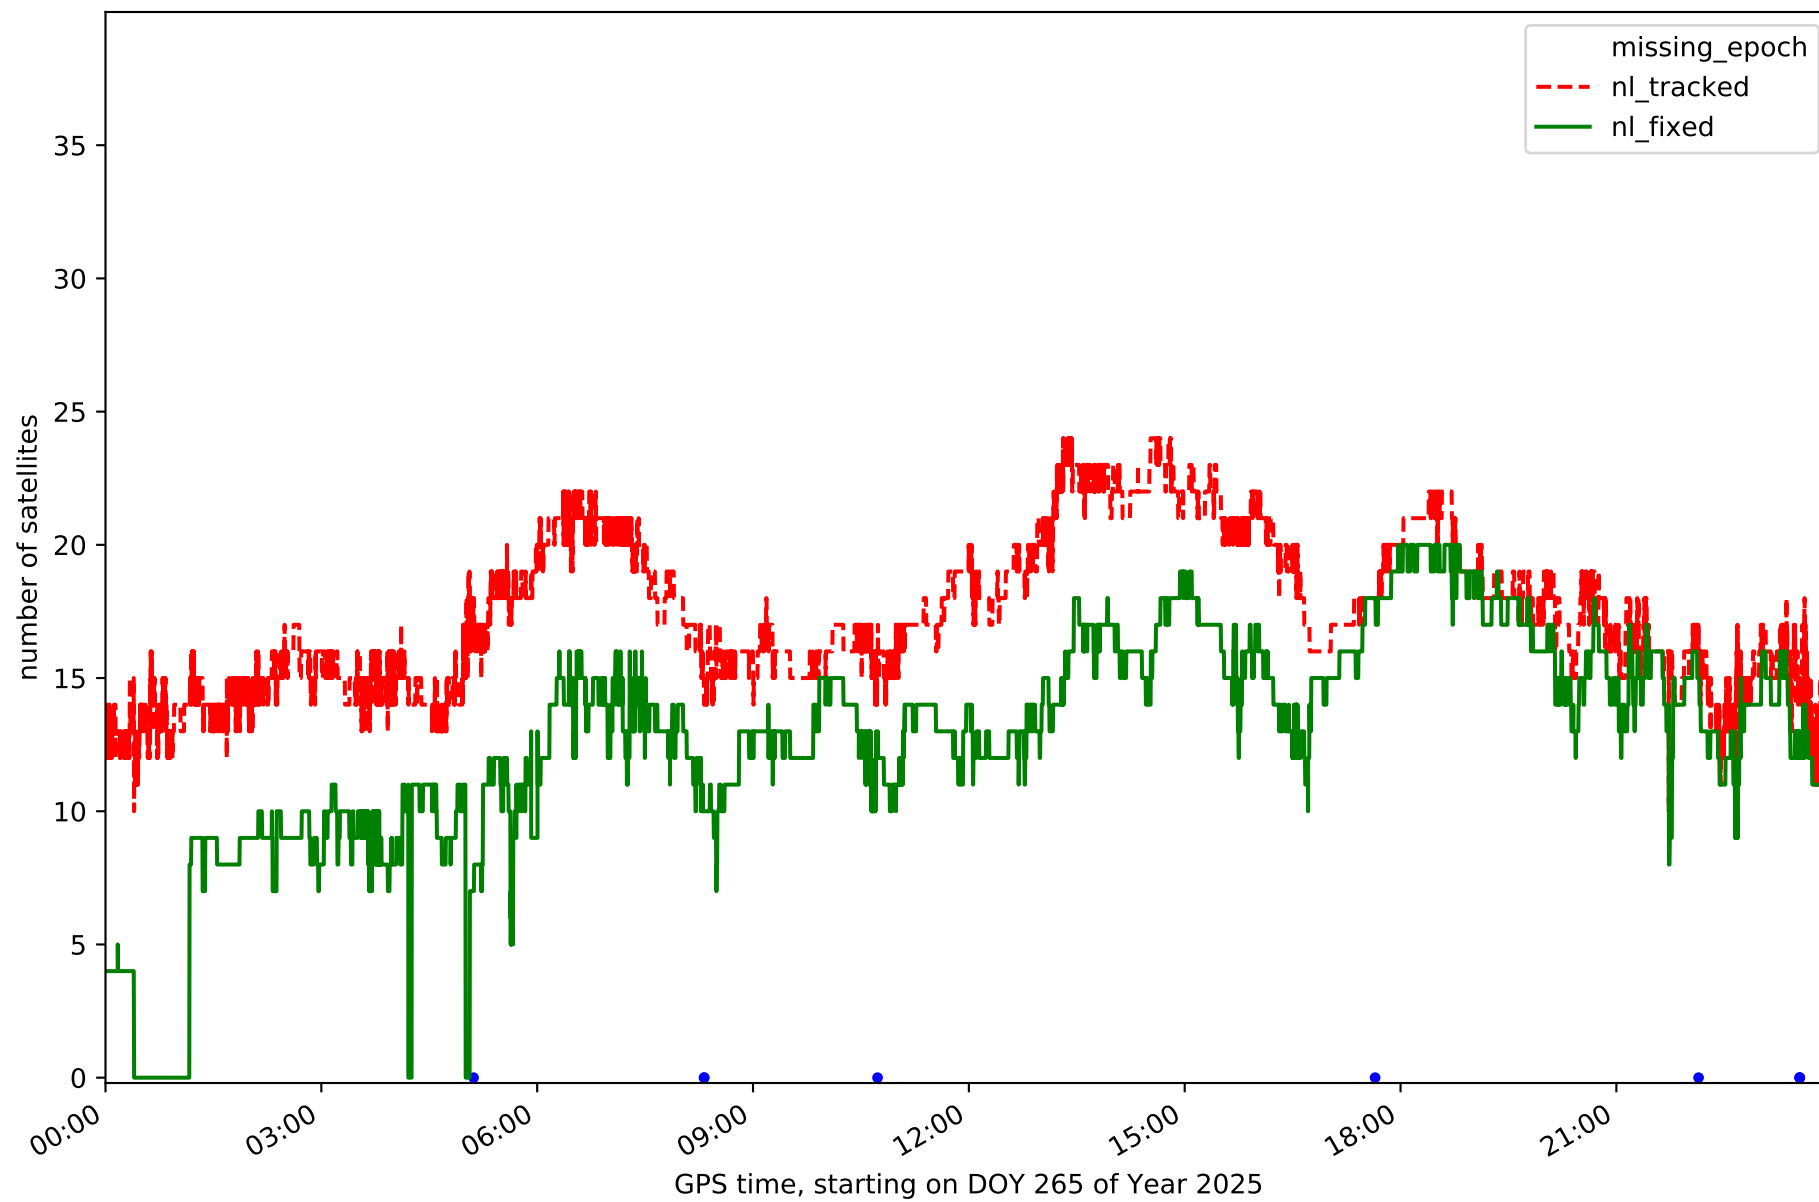


Station LPAL in network NT32

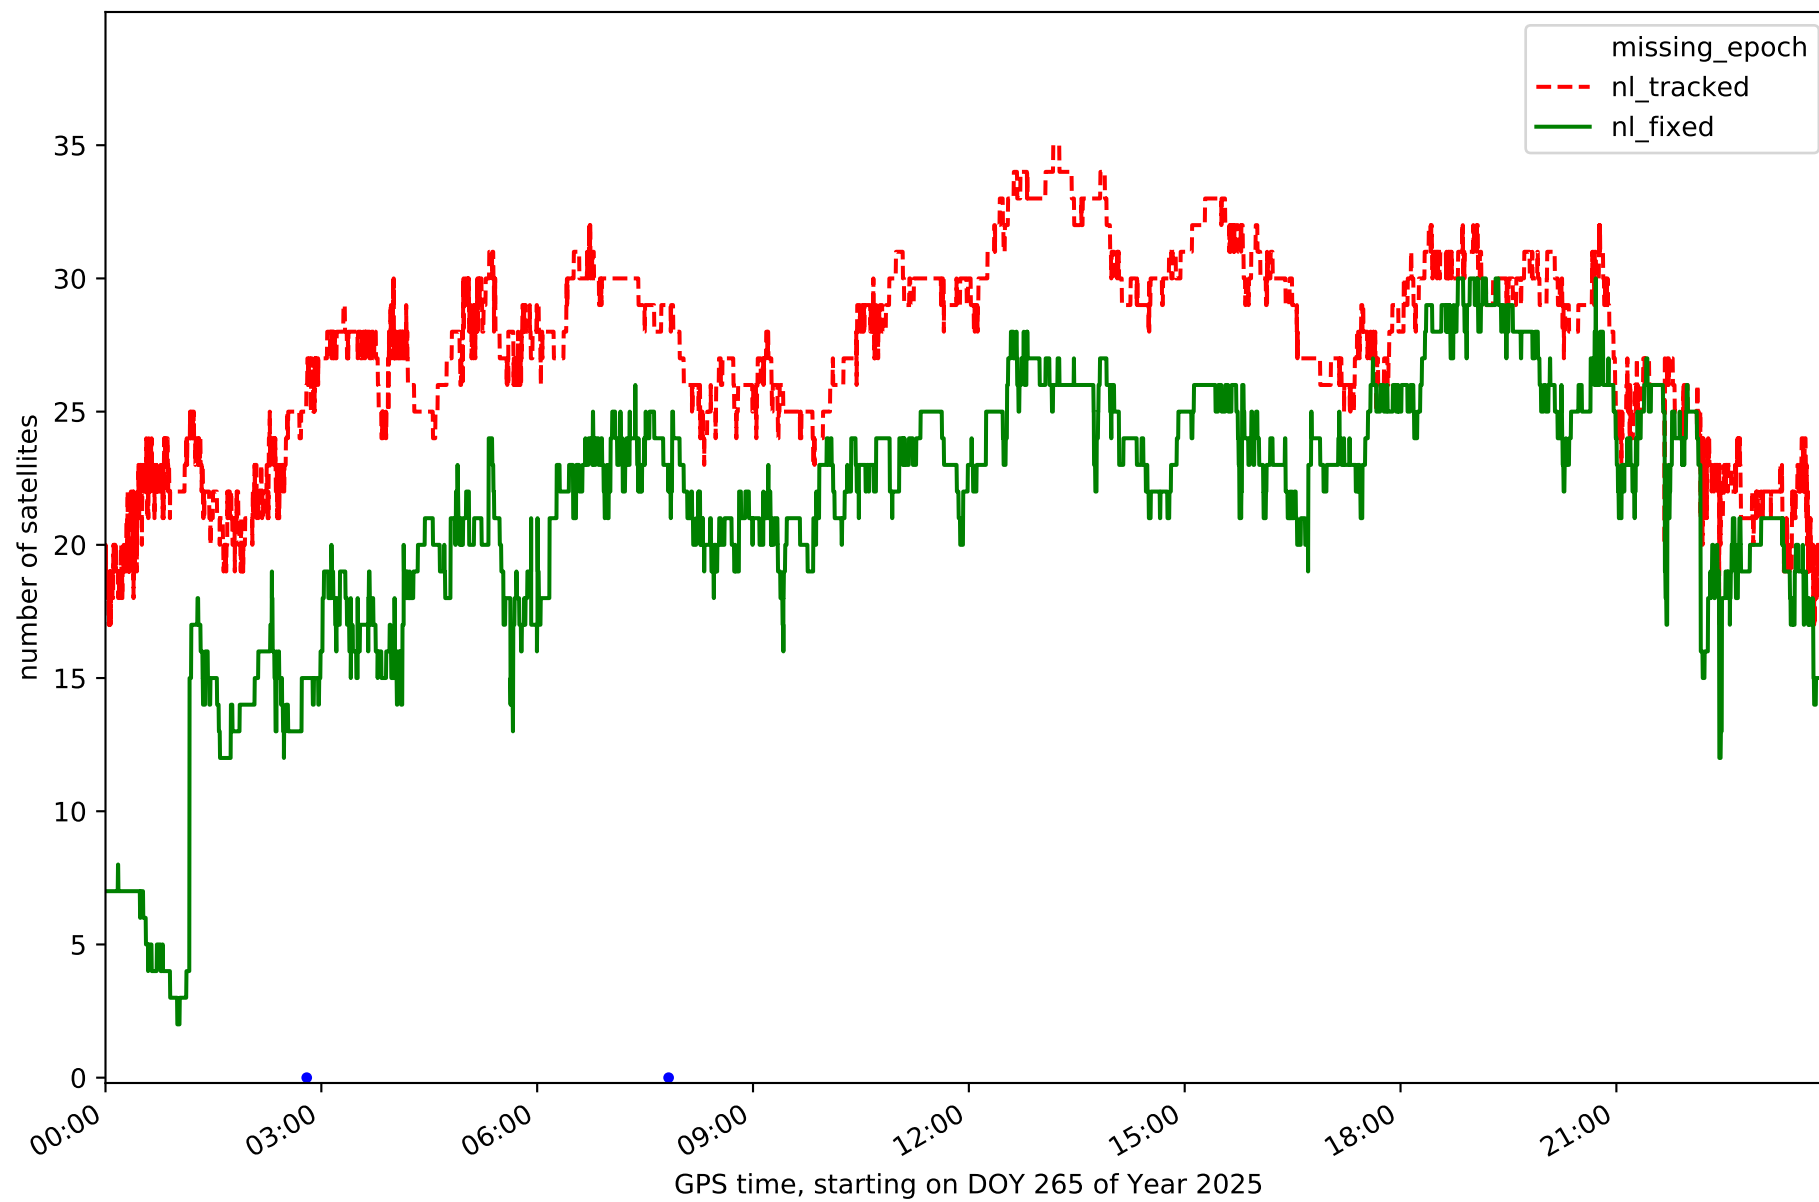


Station LRES in network NT32

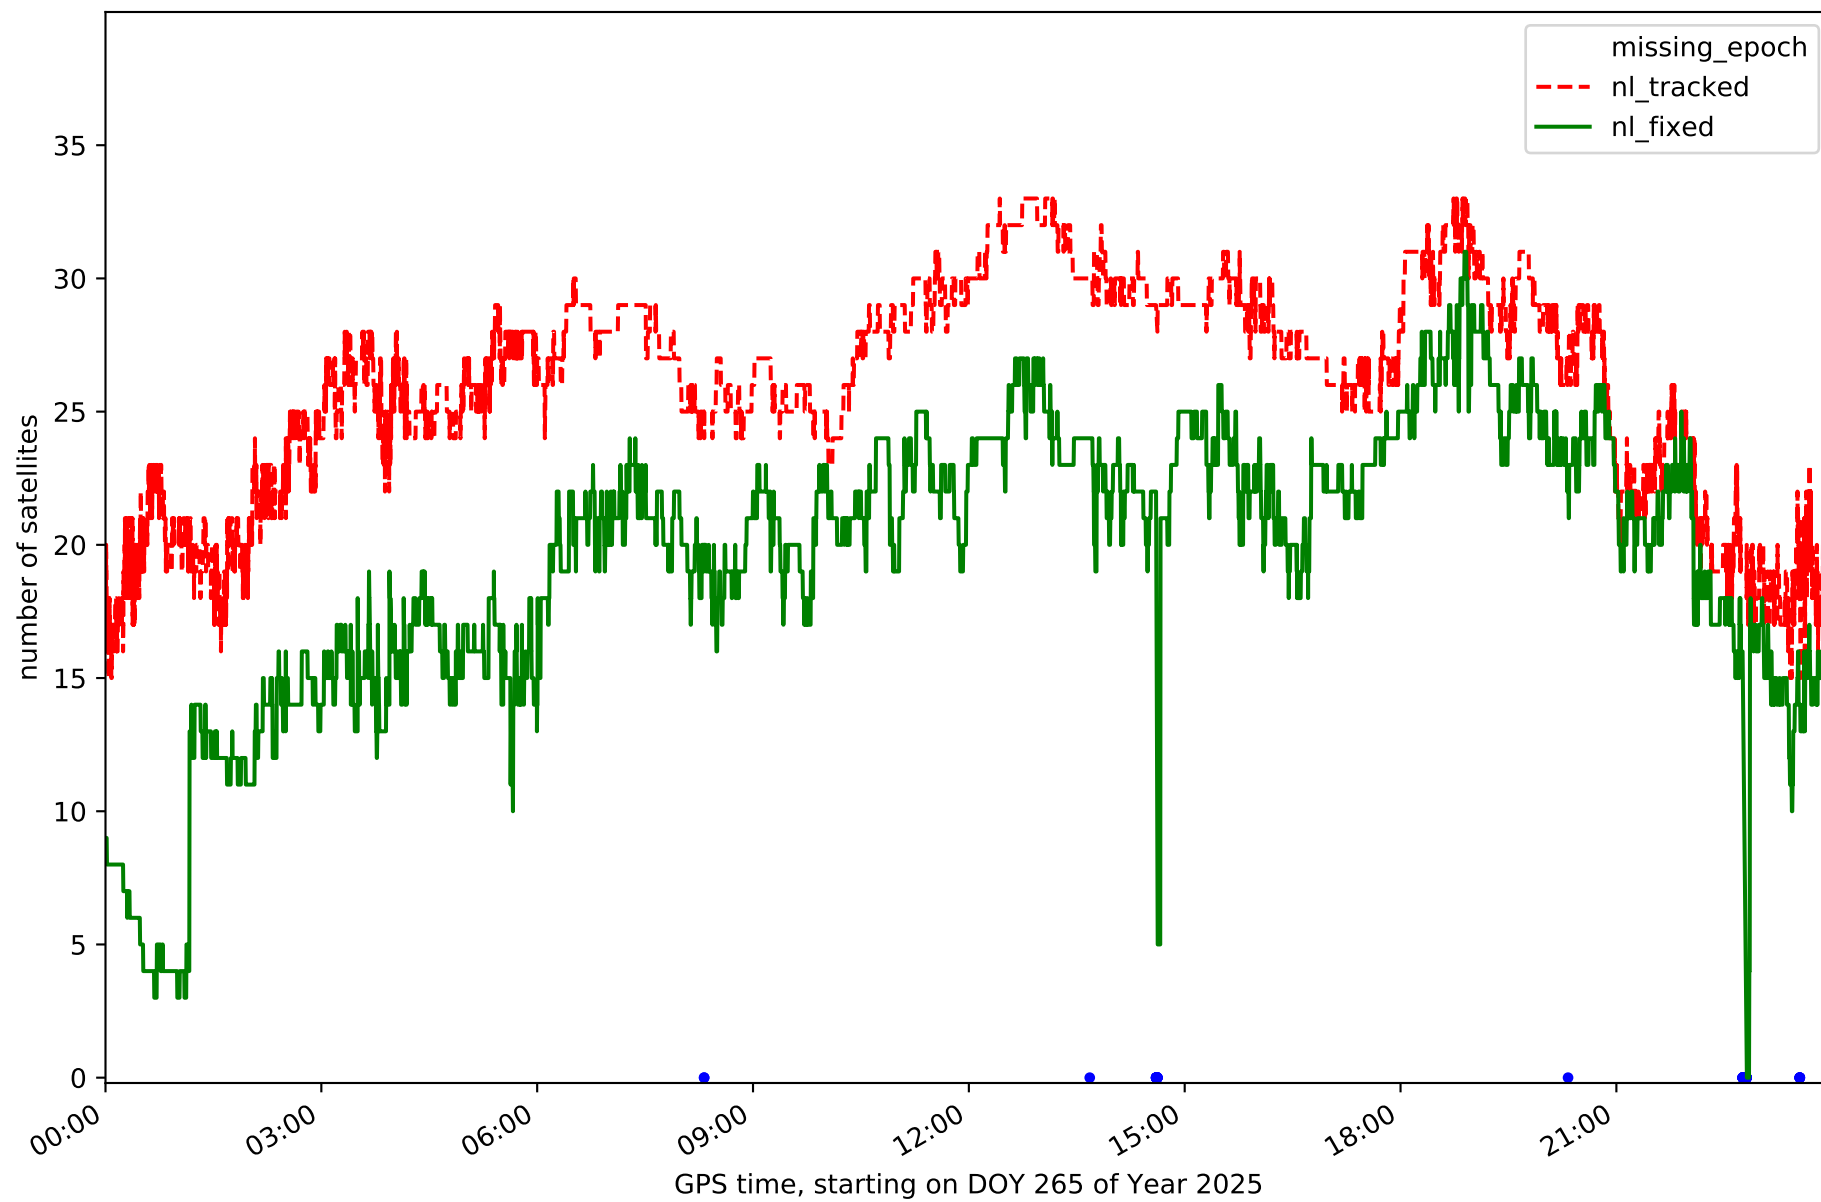


Station TN01 in network NT32

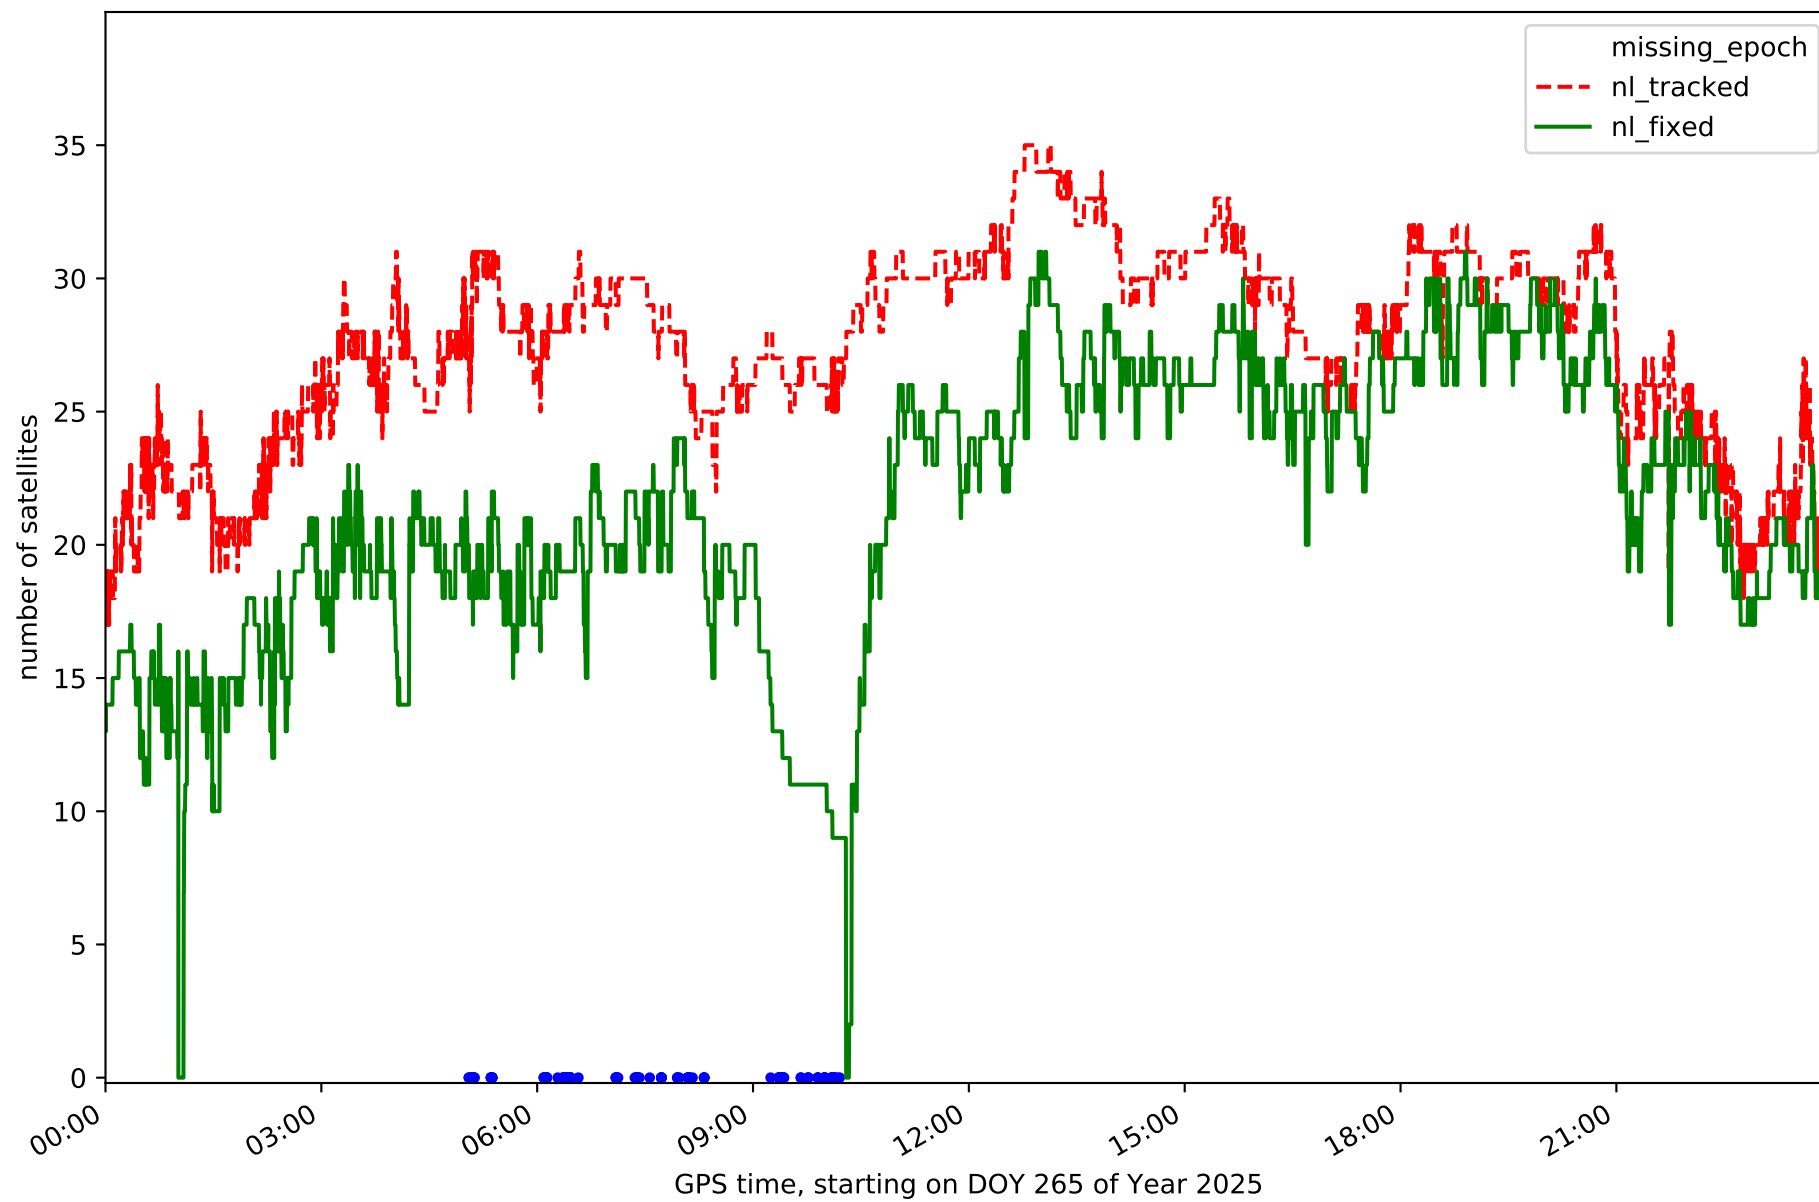


Station TN02 in network NT32

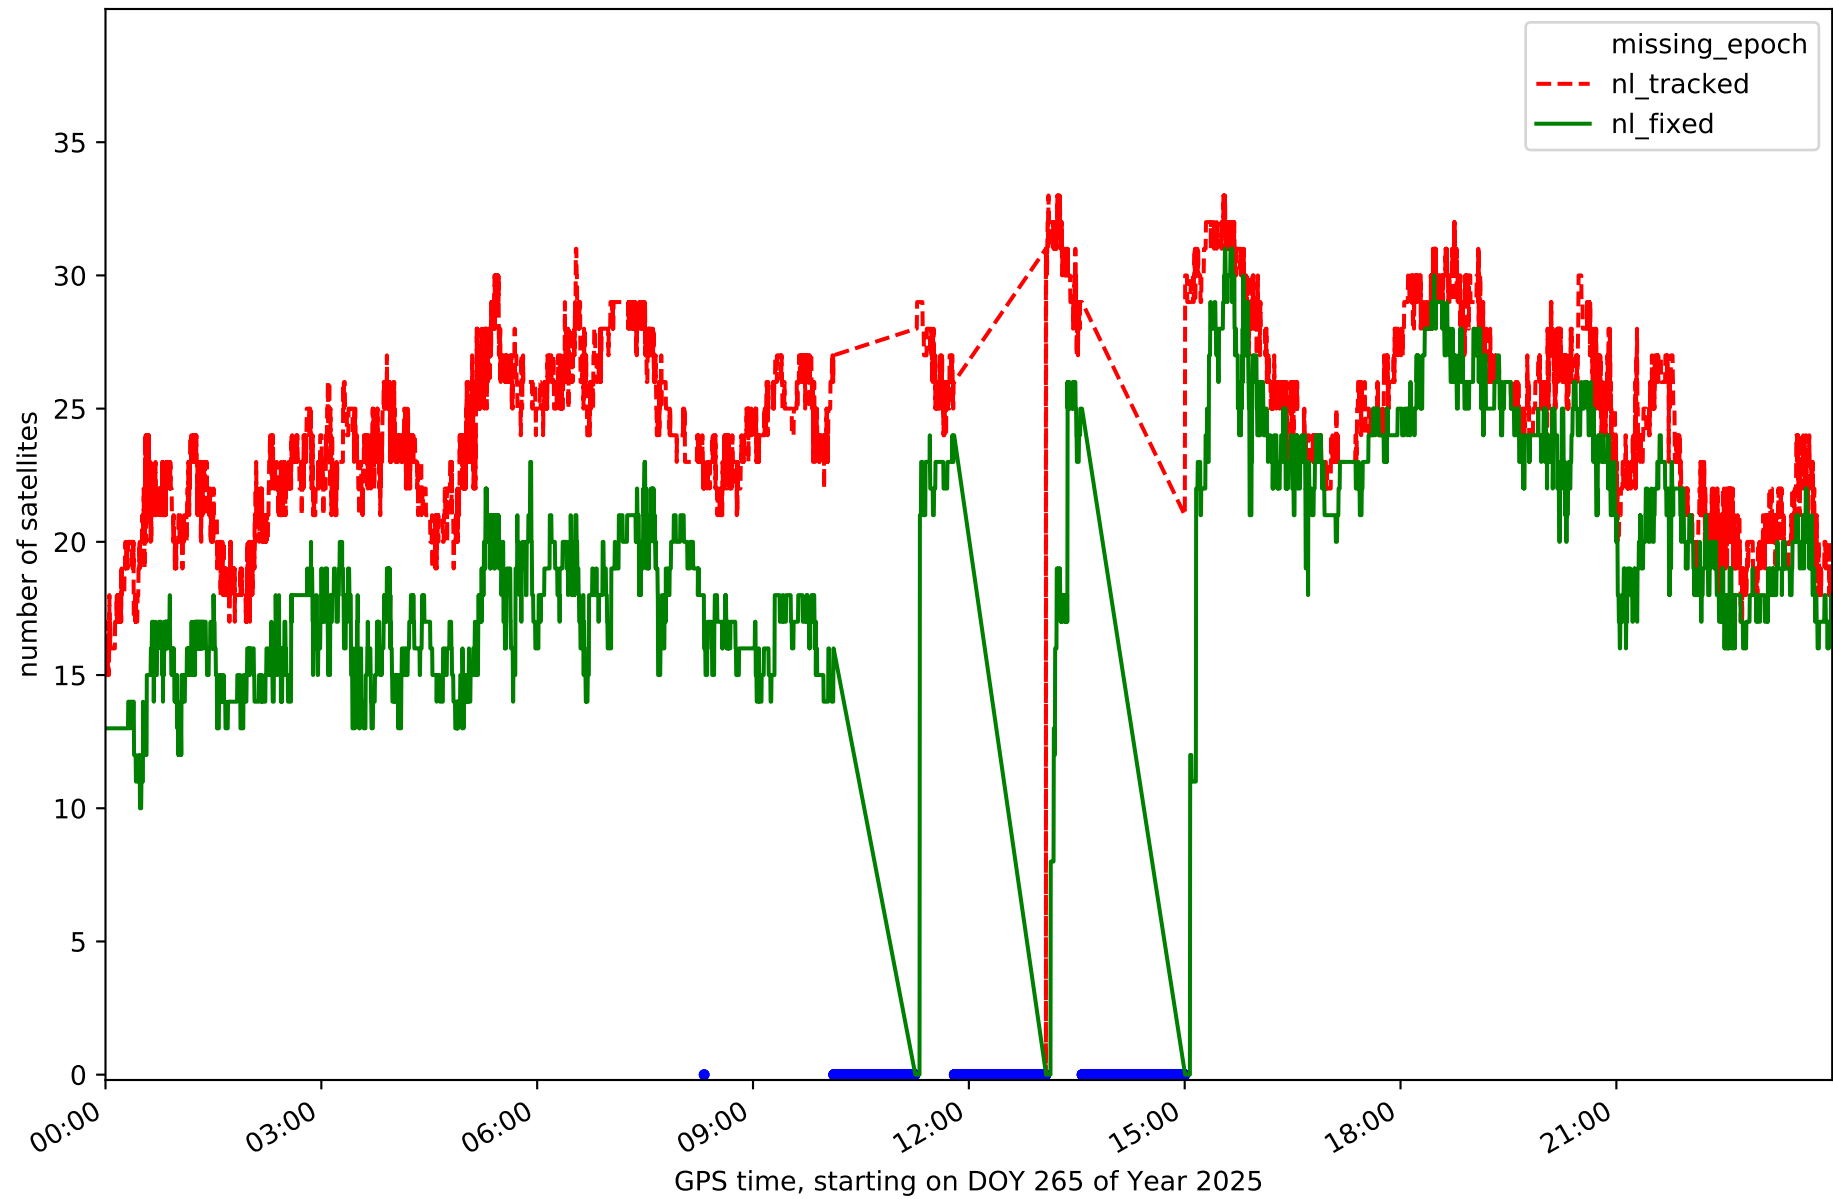


Station TN03 in network NT32

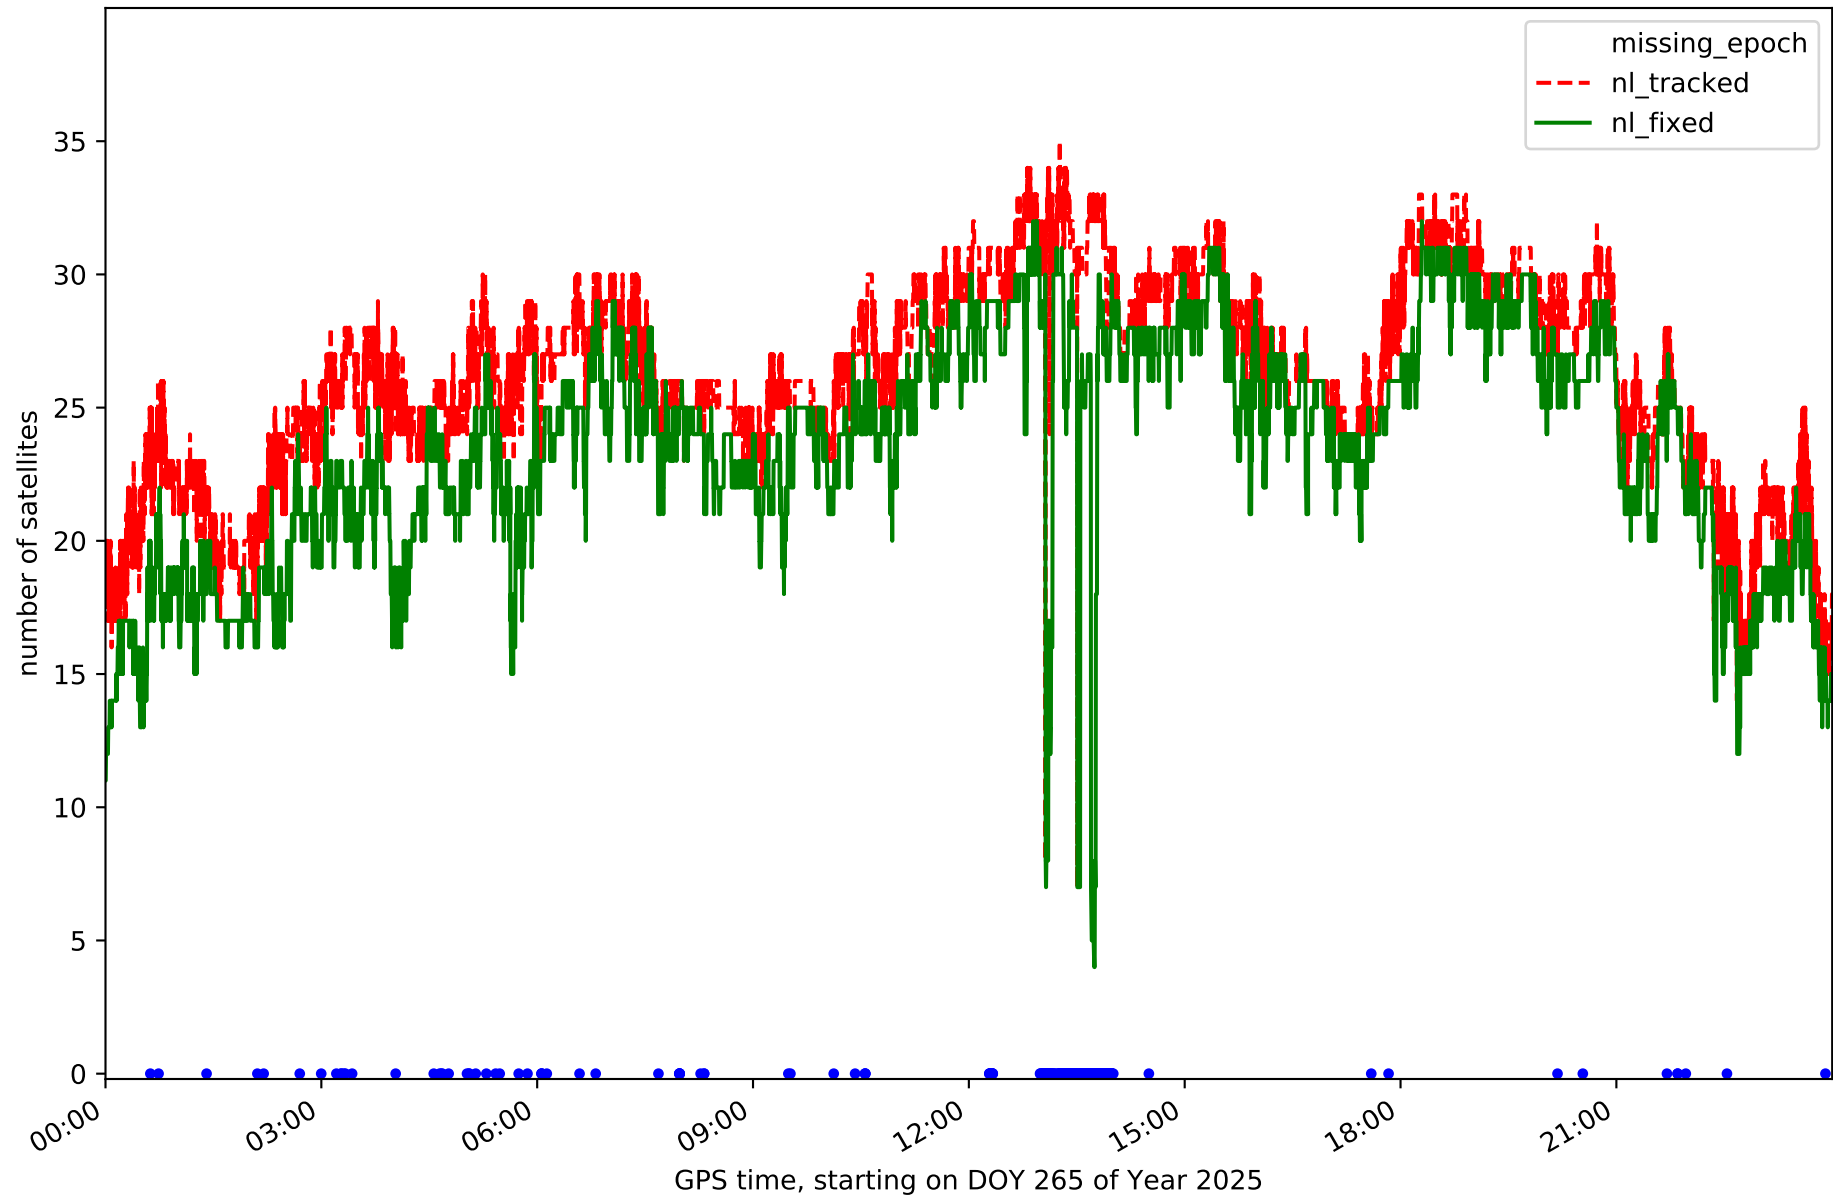


Station TN04 in network NT32

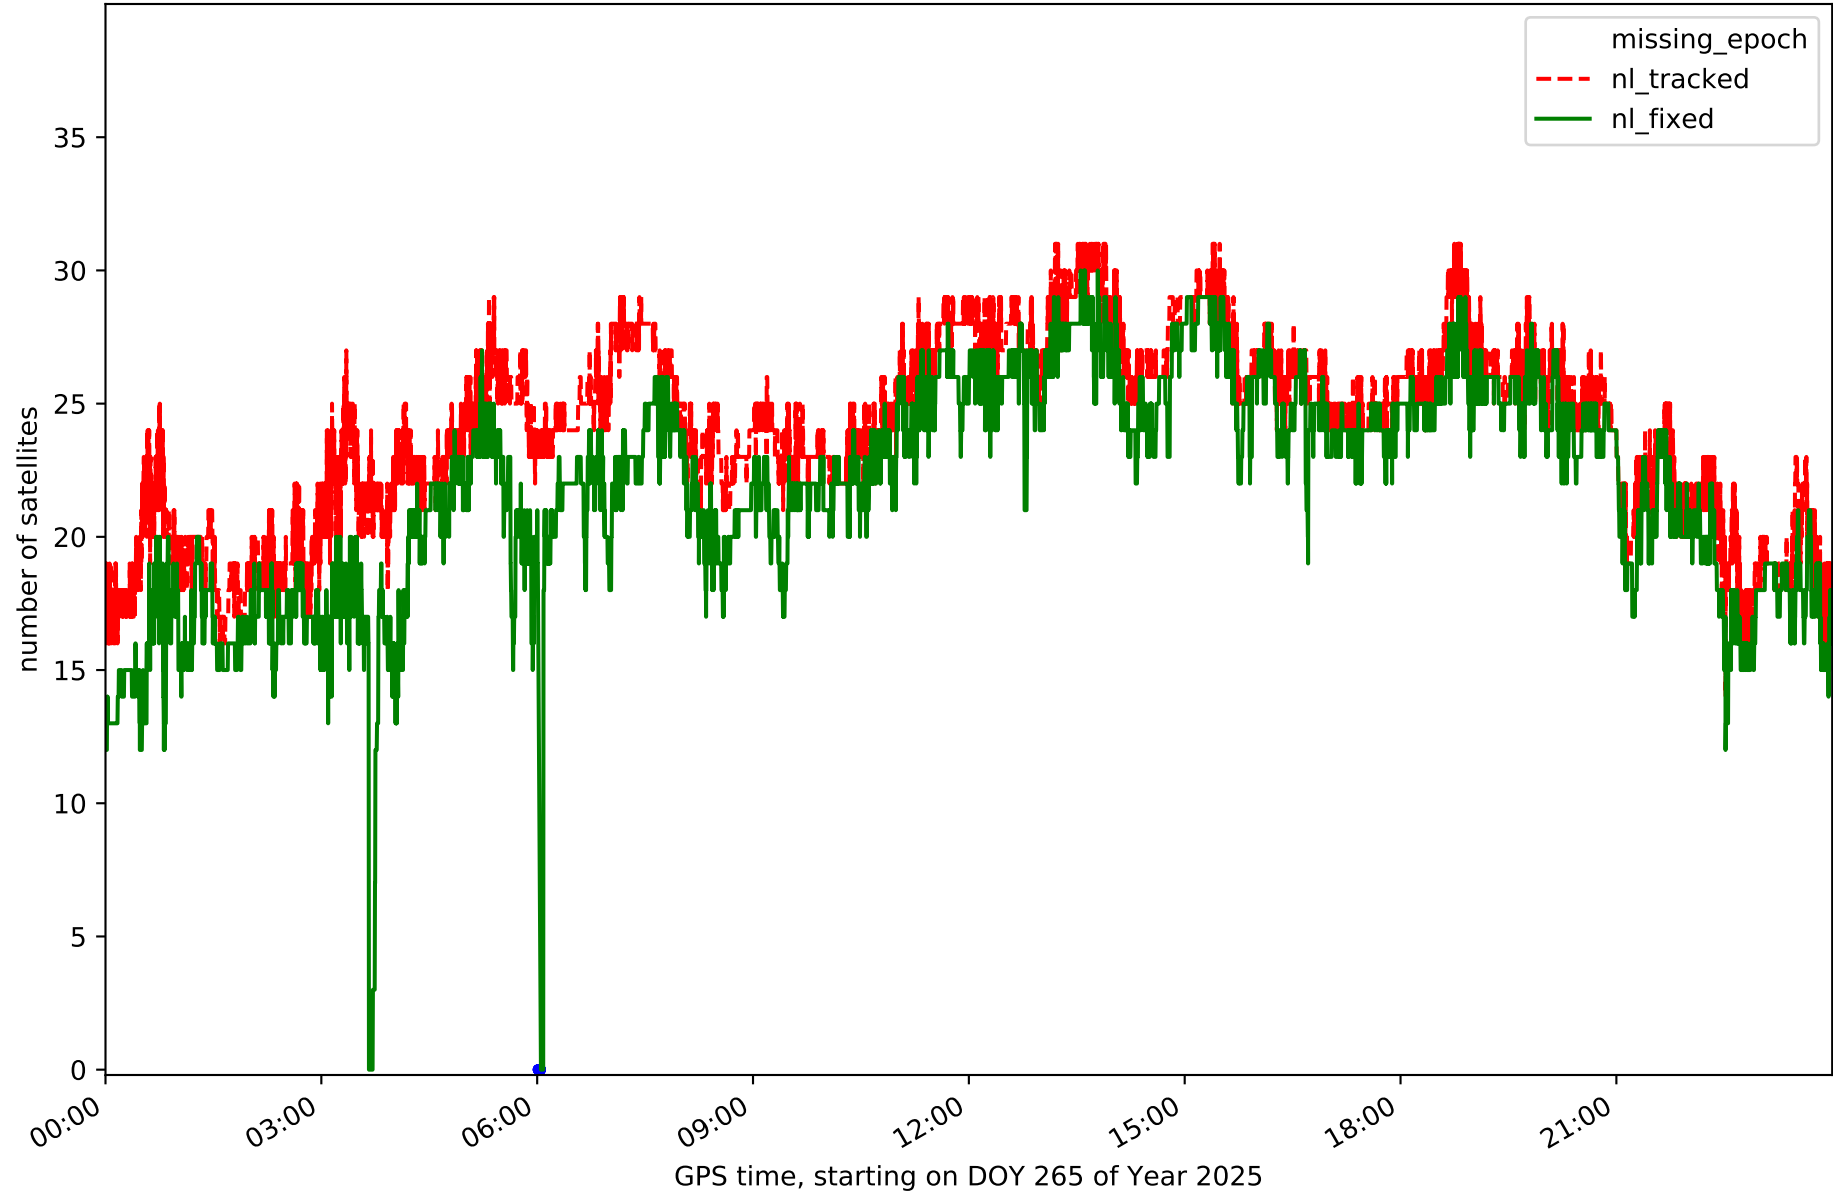


Station TN06 in network NT32

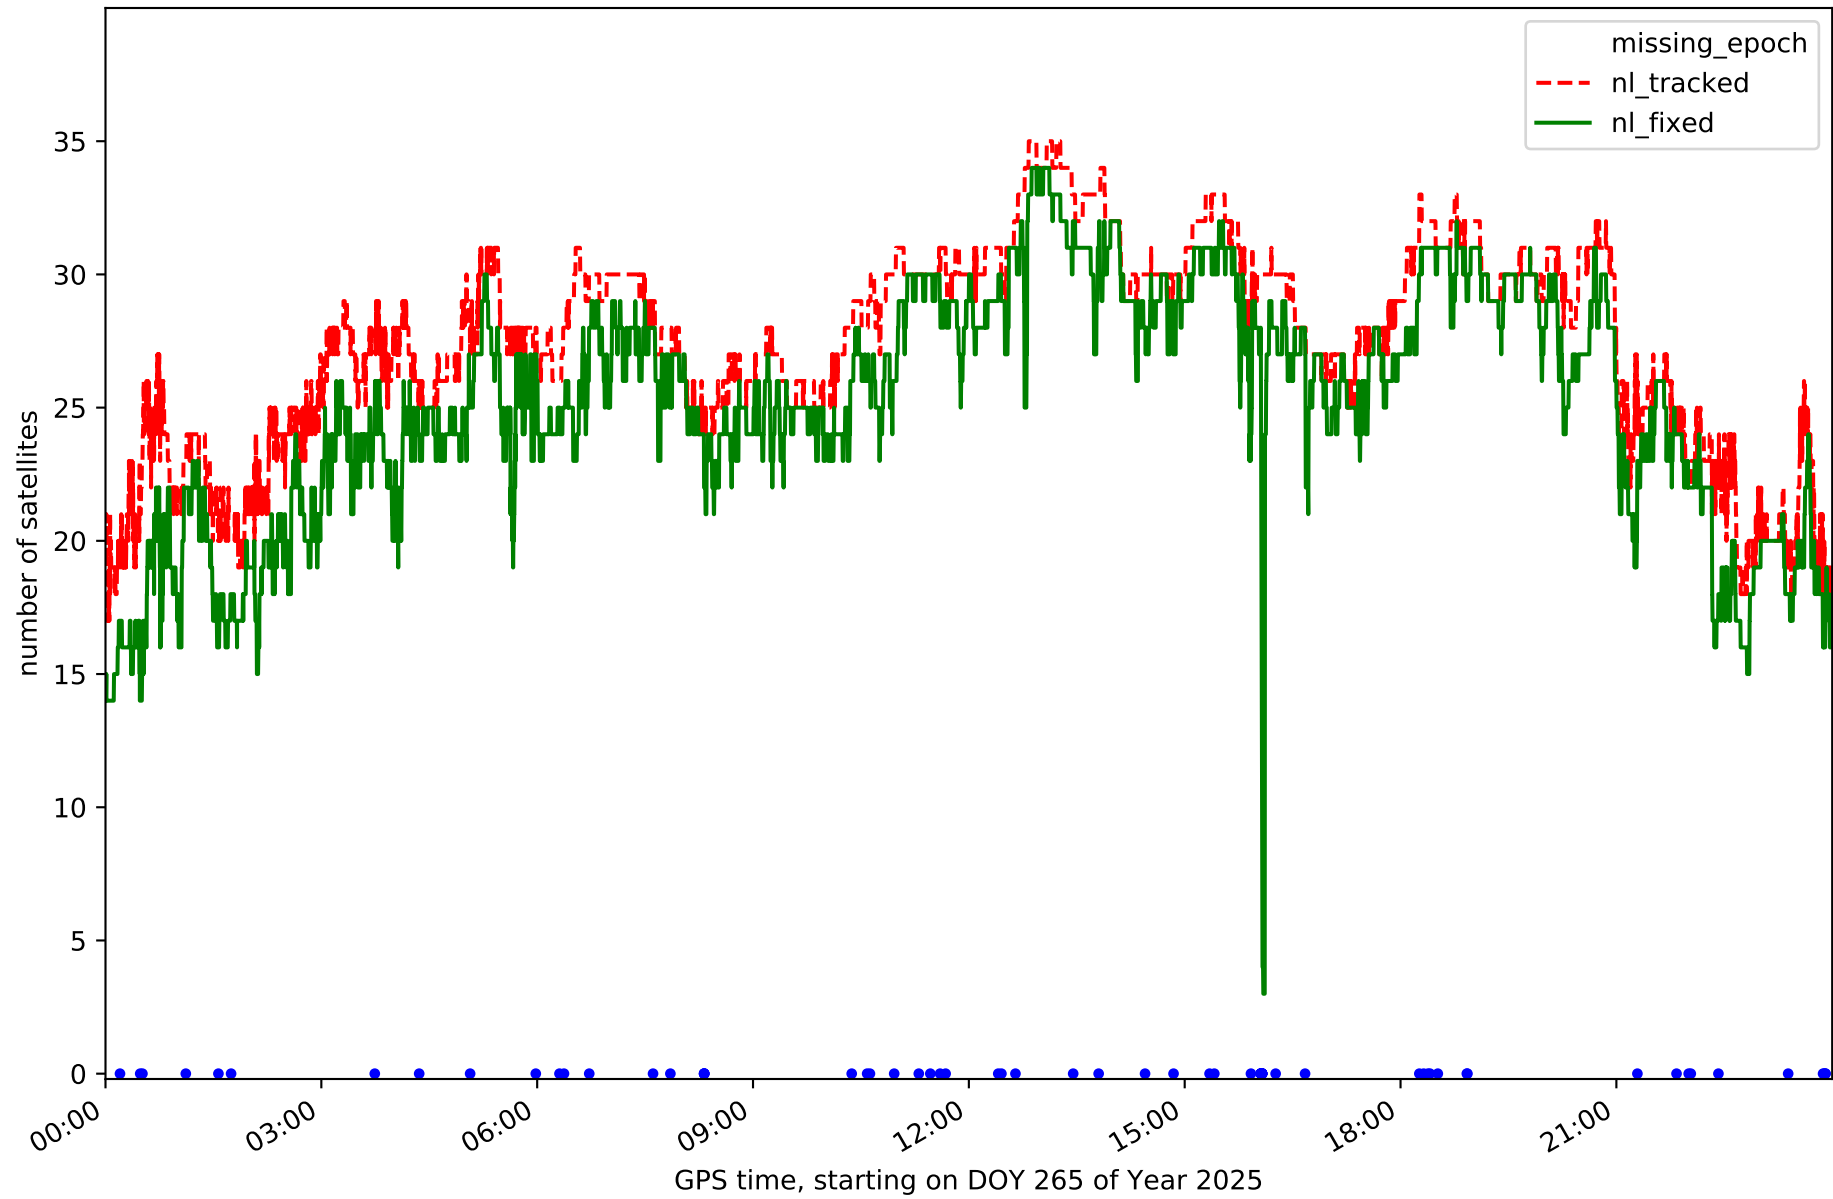


Station TN09 in network NT32

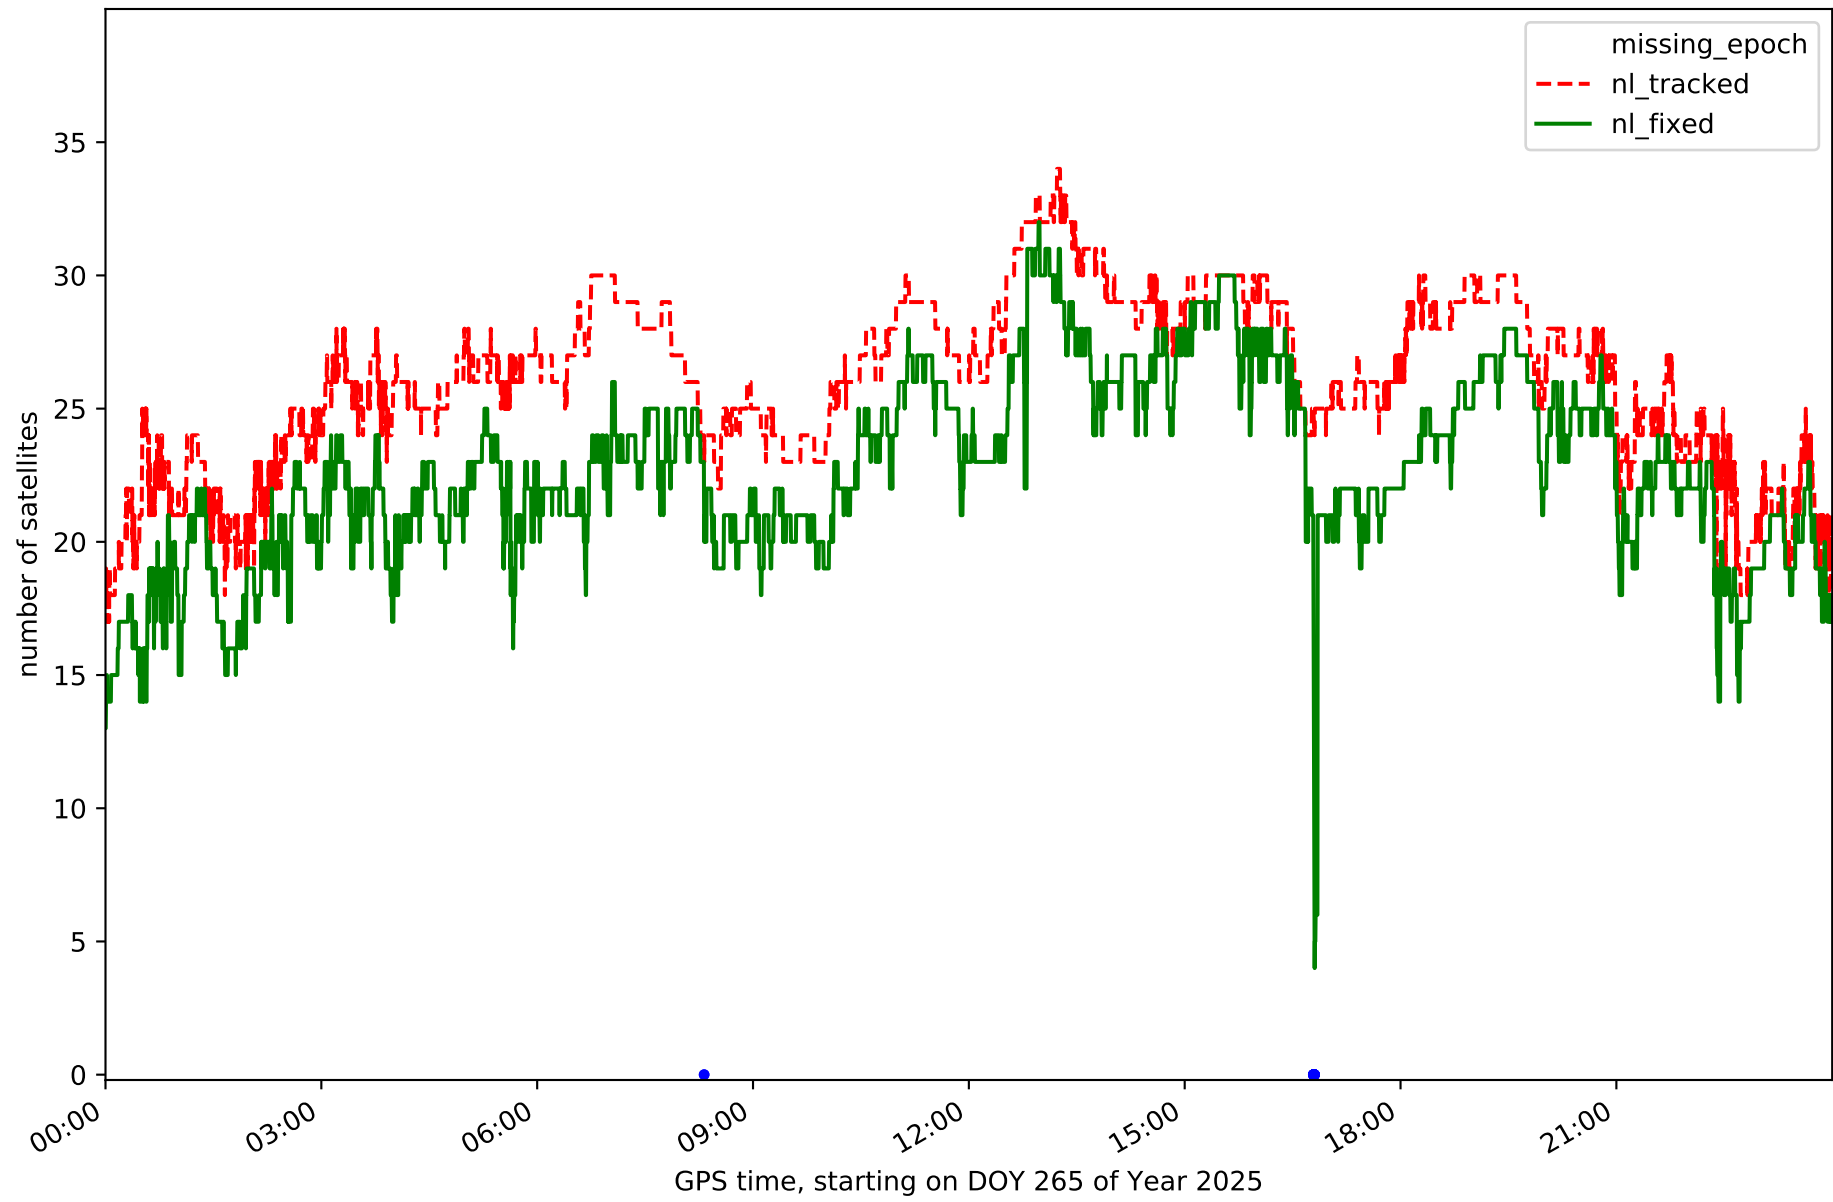


Station TE11 in network NT32

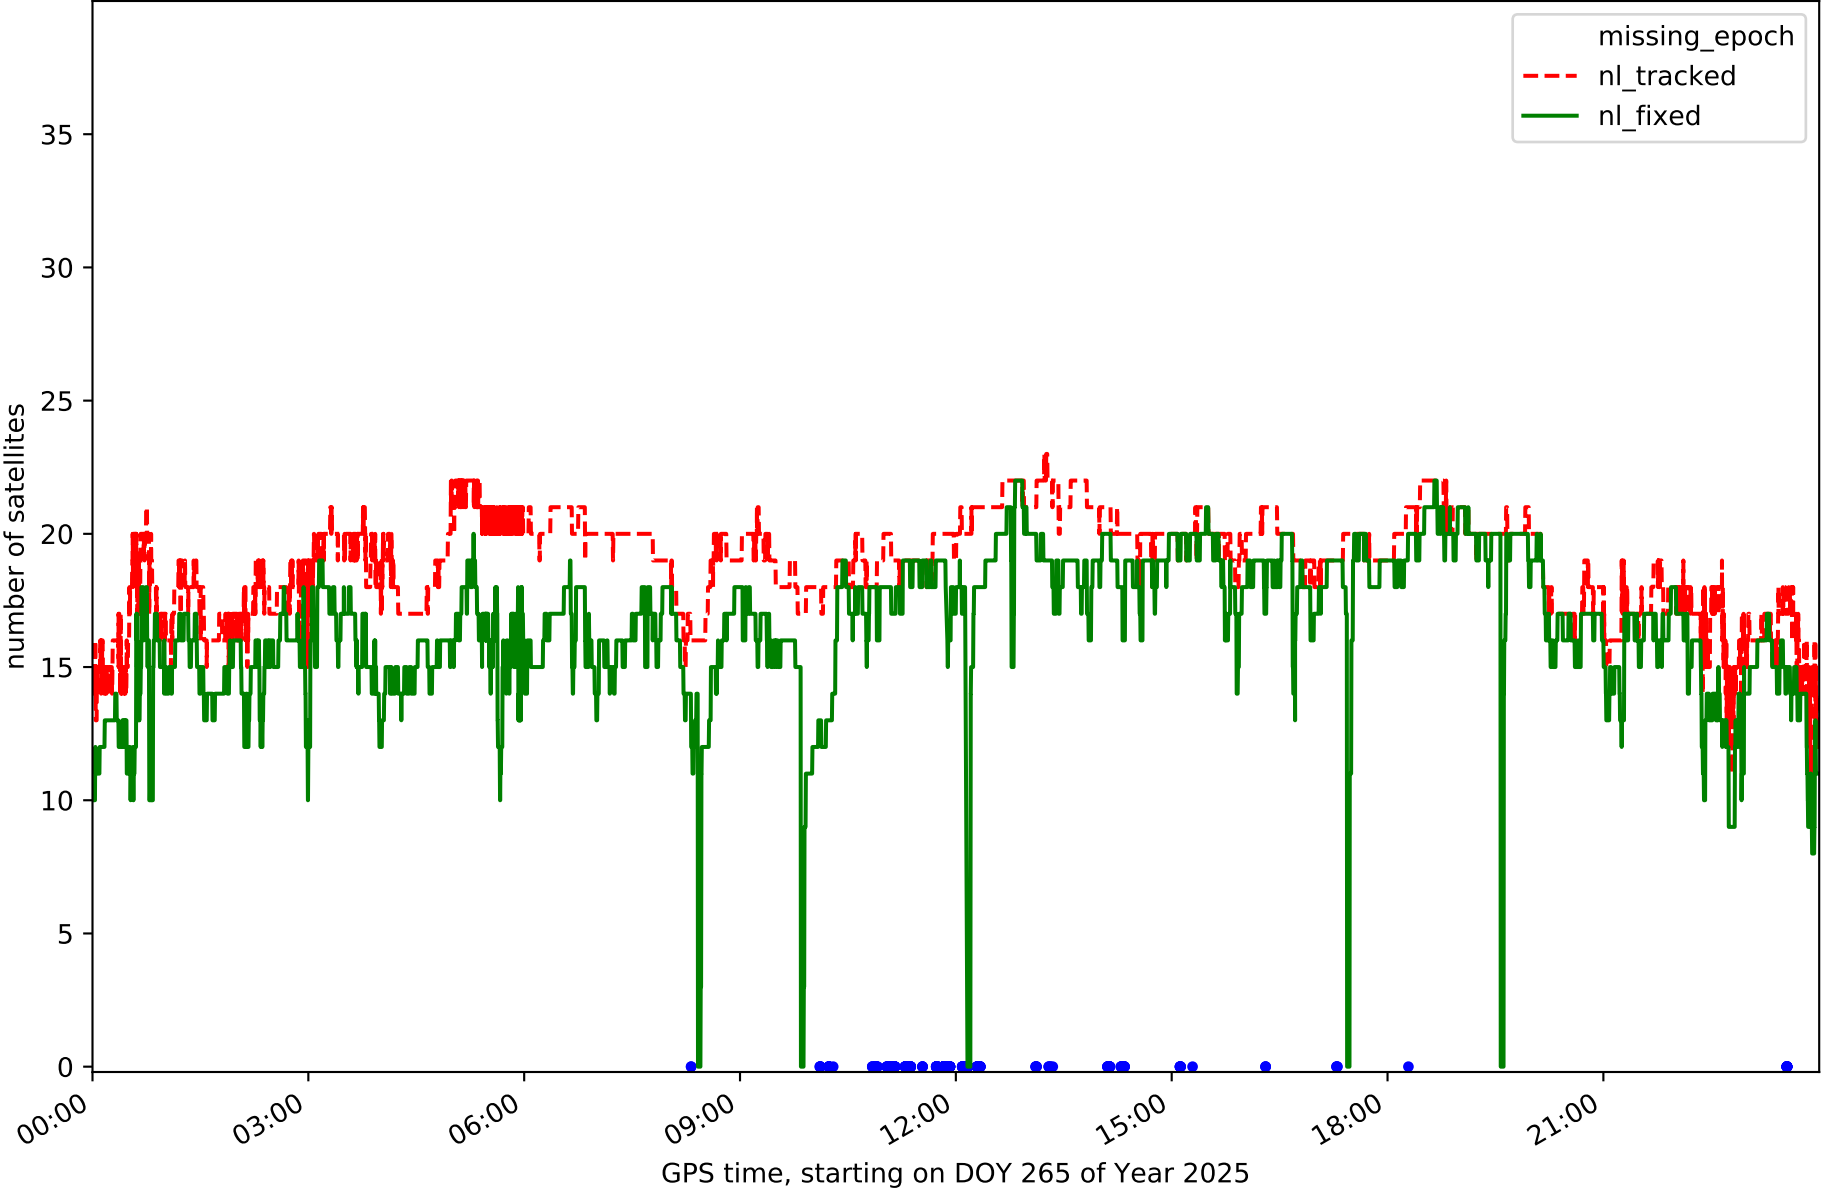


RefCheck for station EH01 in network NT32

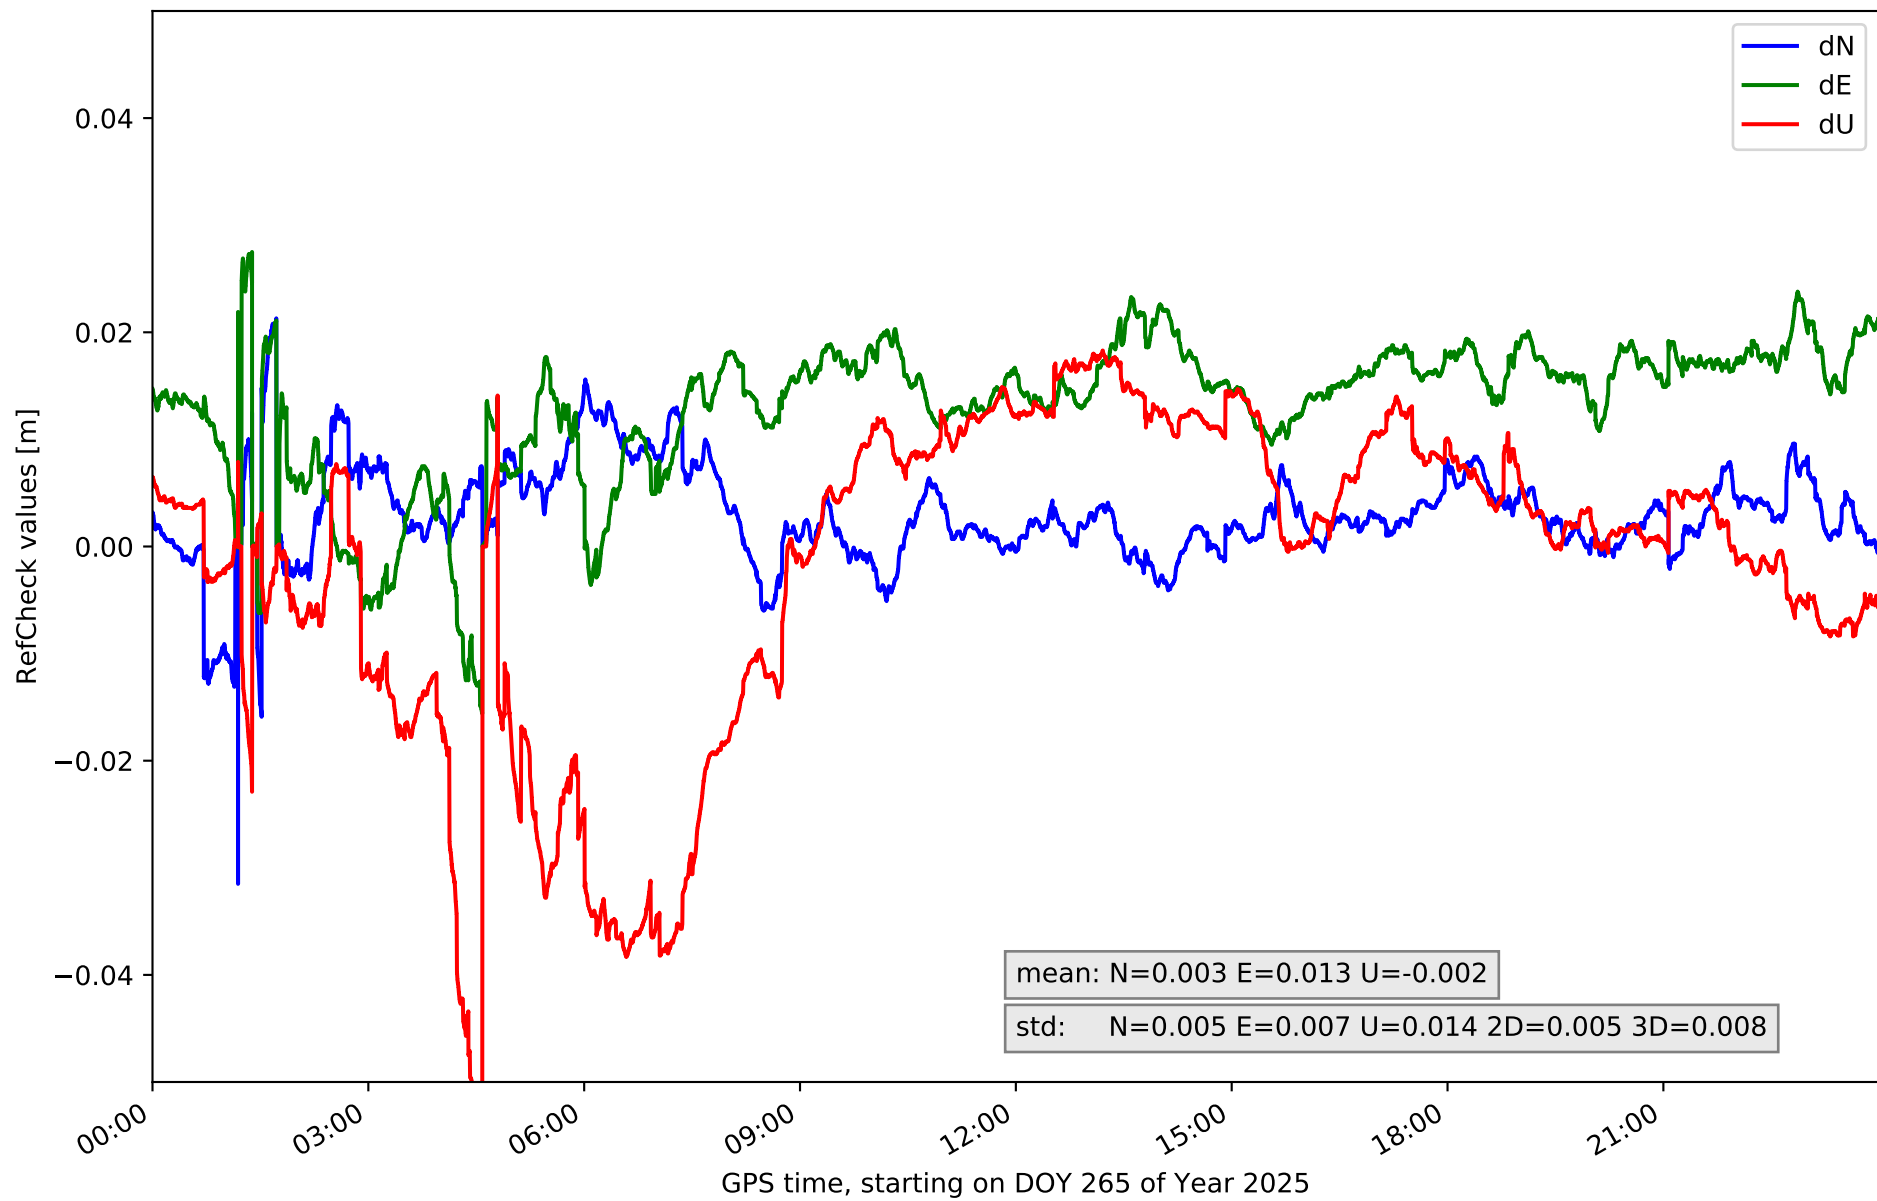


RefCheck for station GOM1 in network NT32

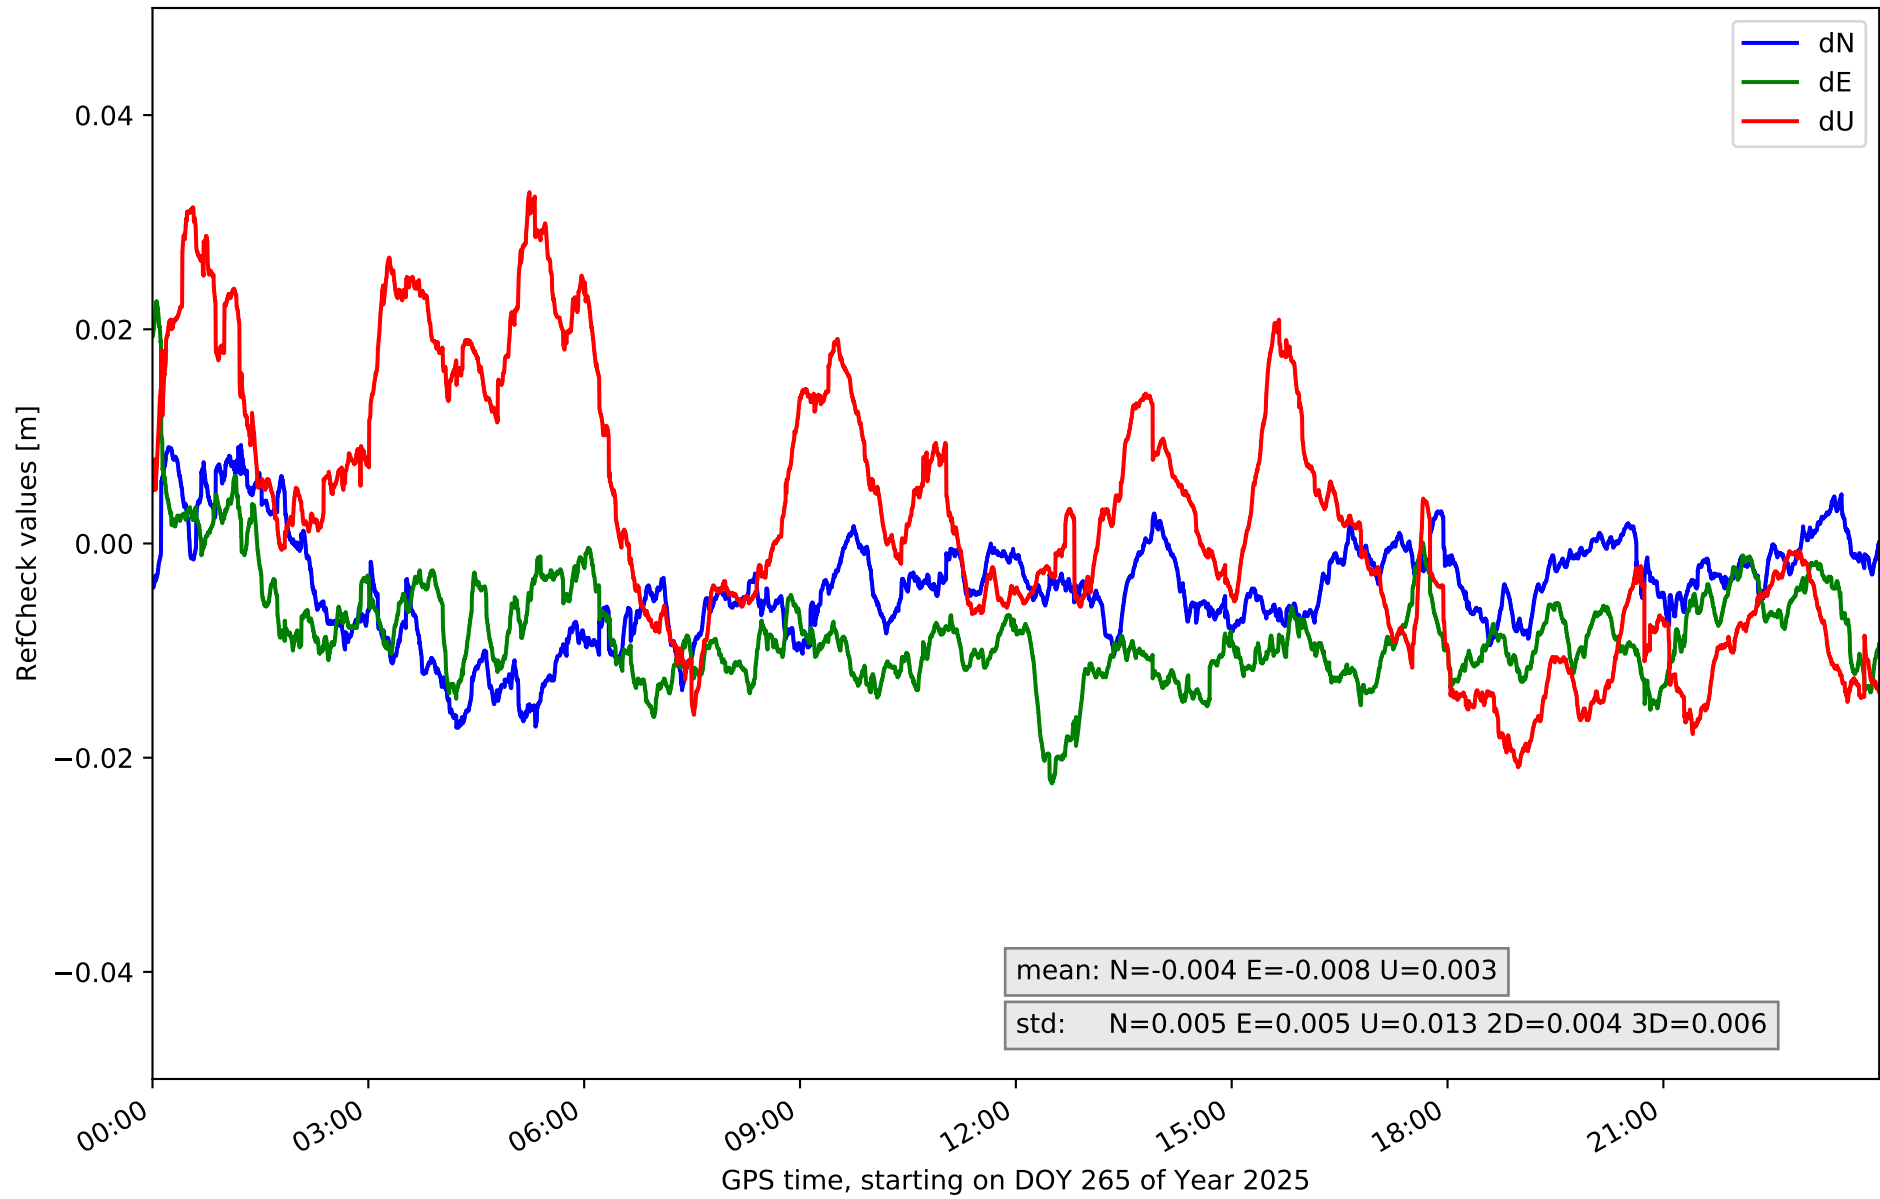


RefCheck for station GOME in network NT32

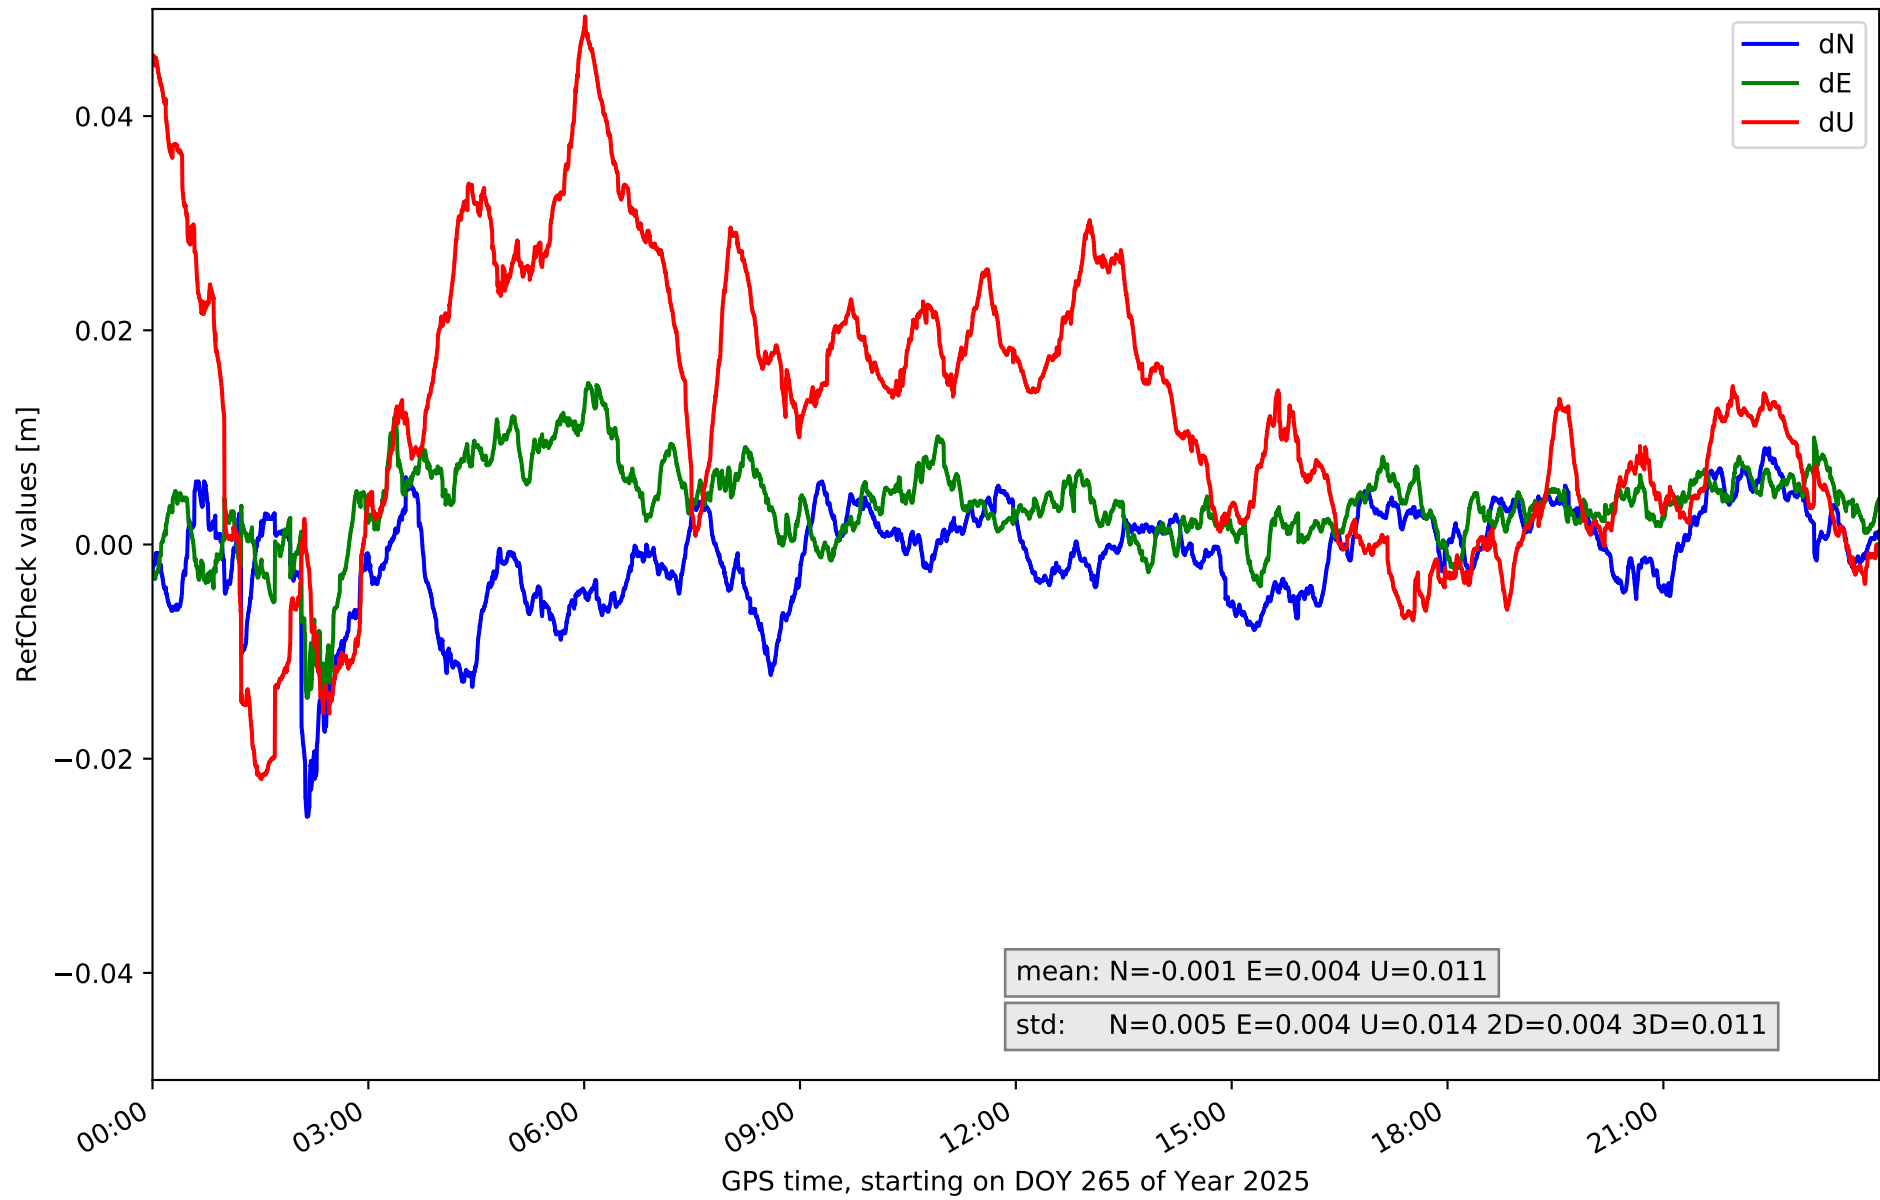


RefCheck for station IZAN in network NT32

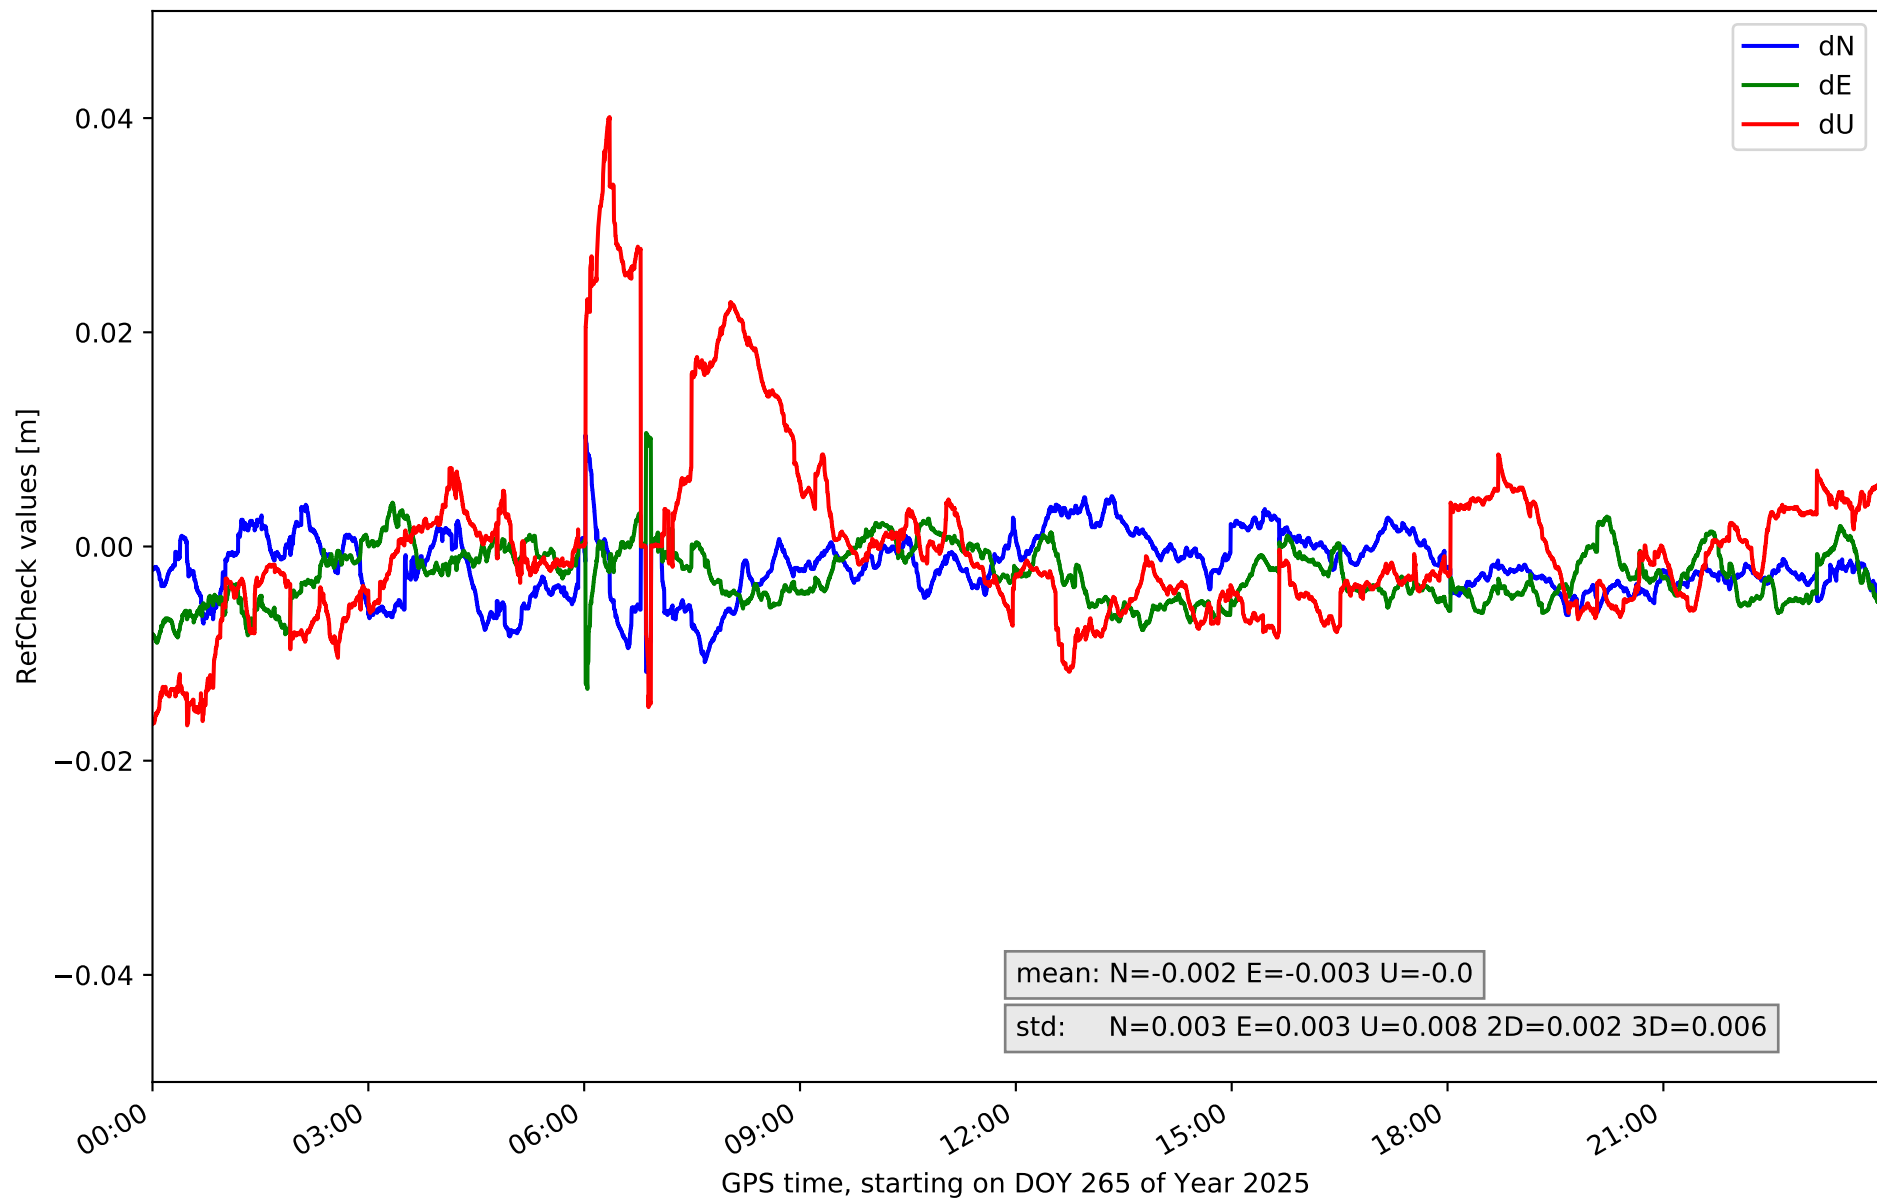


RefCheck for station LP01 in network NT32

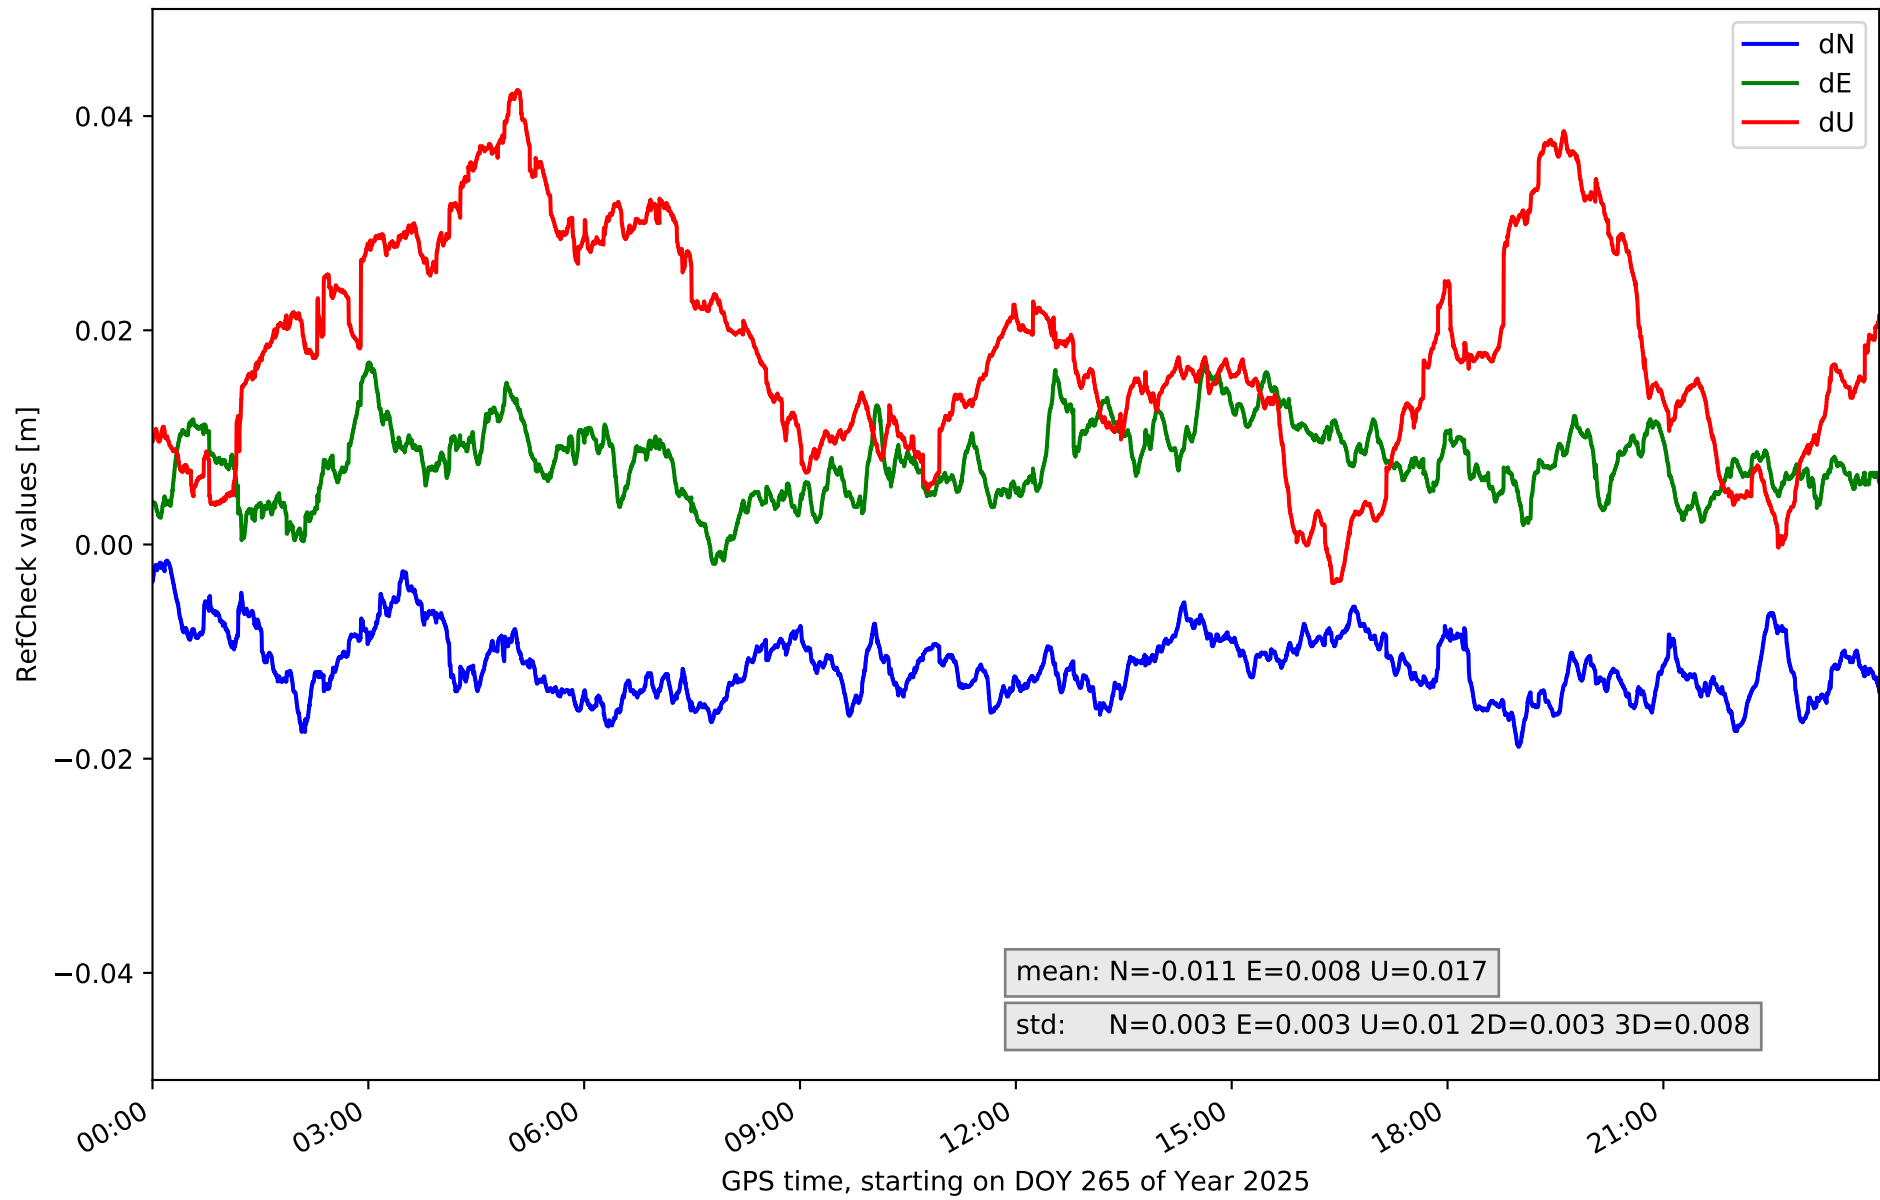


RefCheck for station LP03 in network NT32

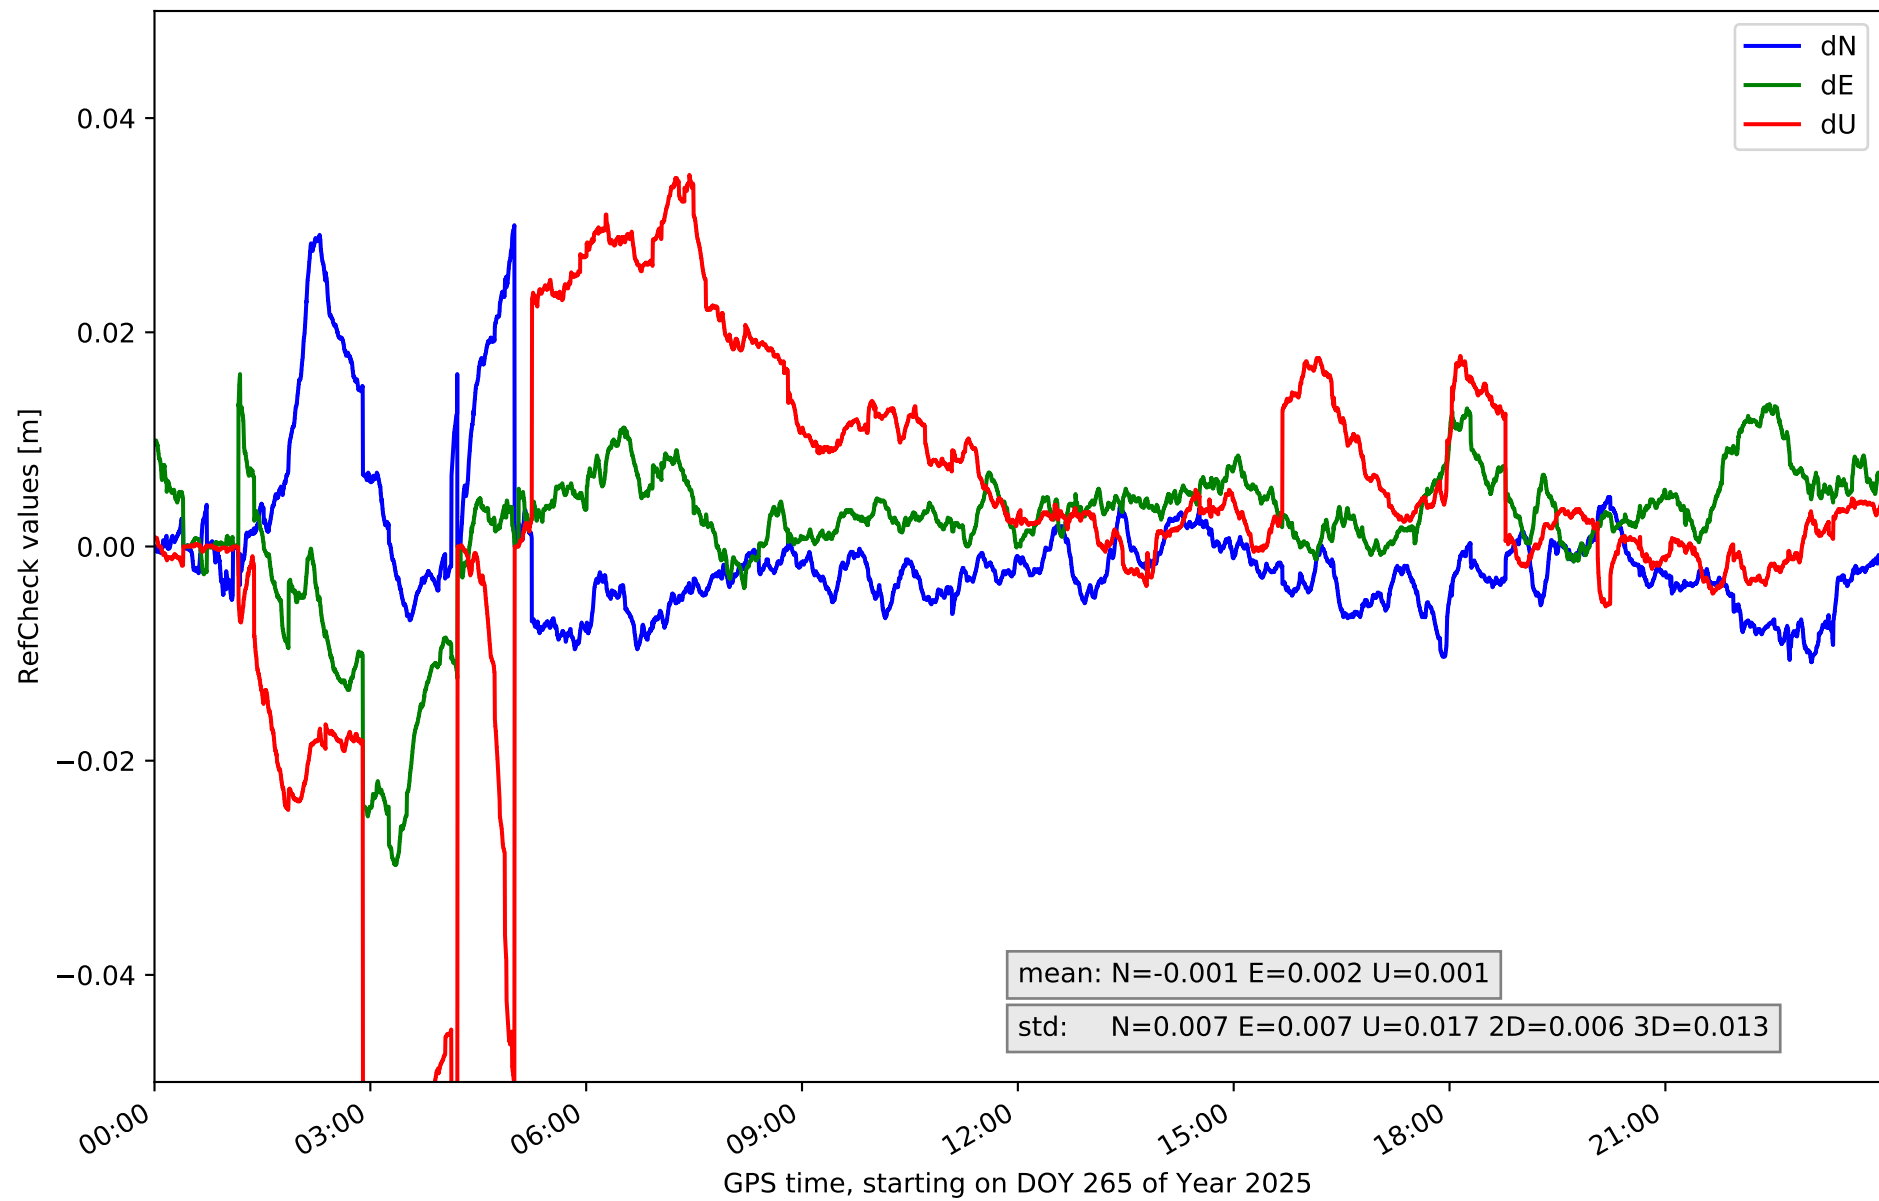


RefCheck for station LPAL in network NT32

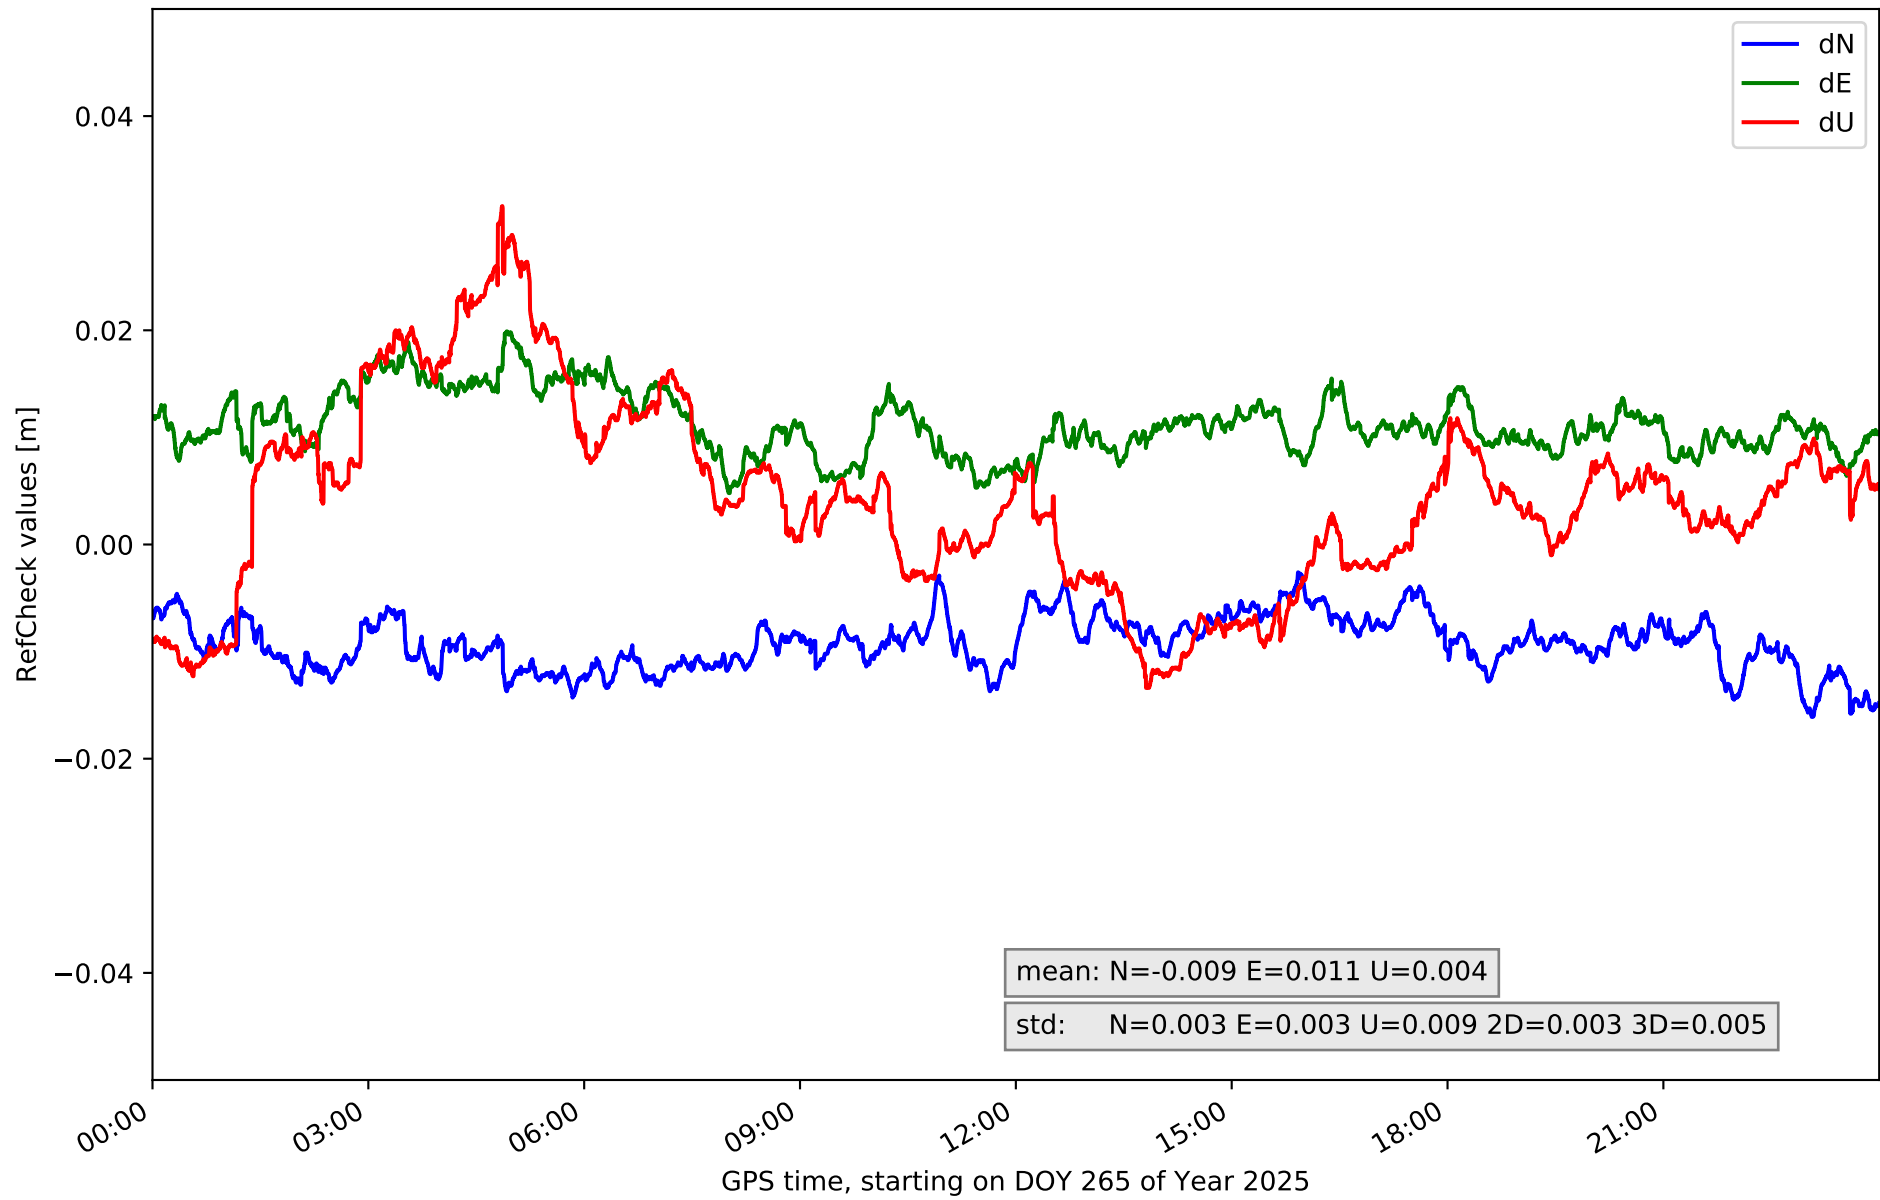


RefCheck for station LRES in network NT32

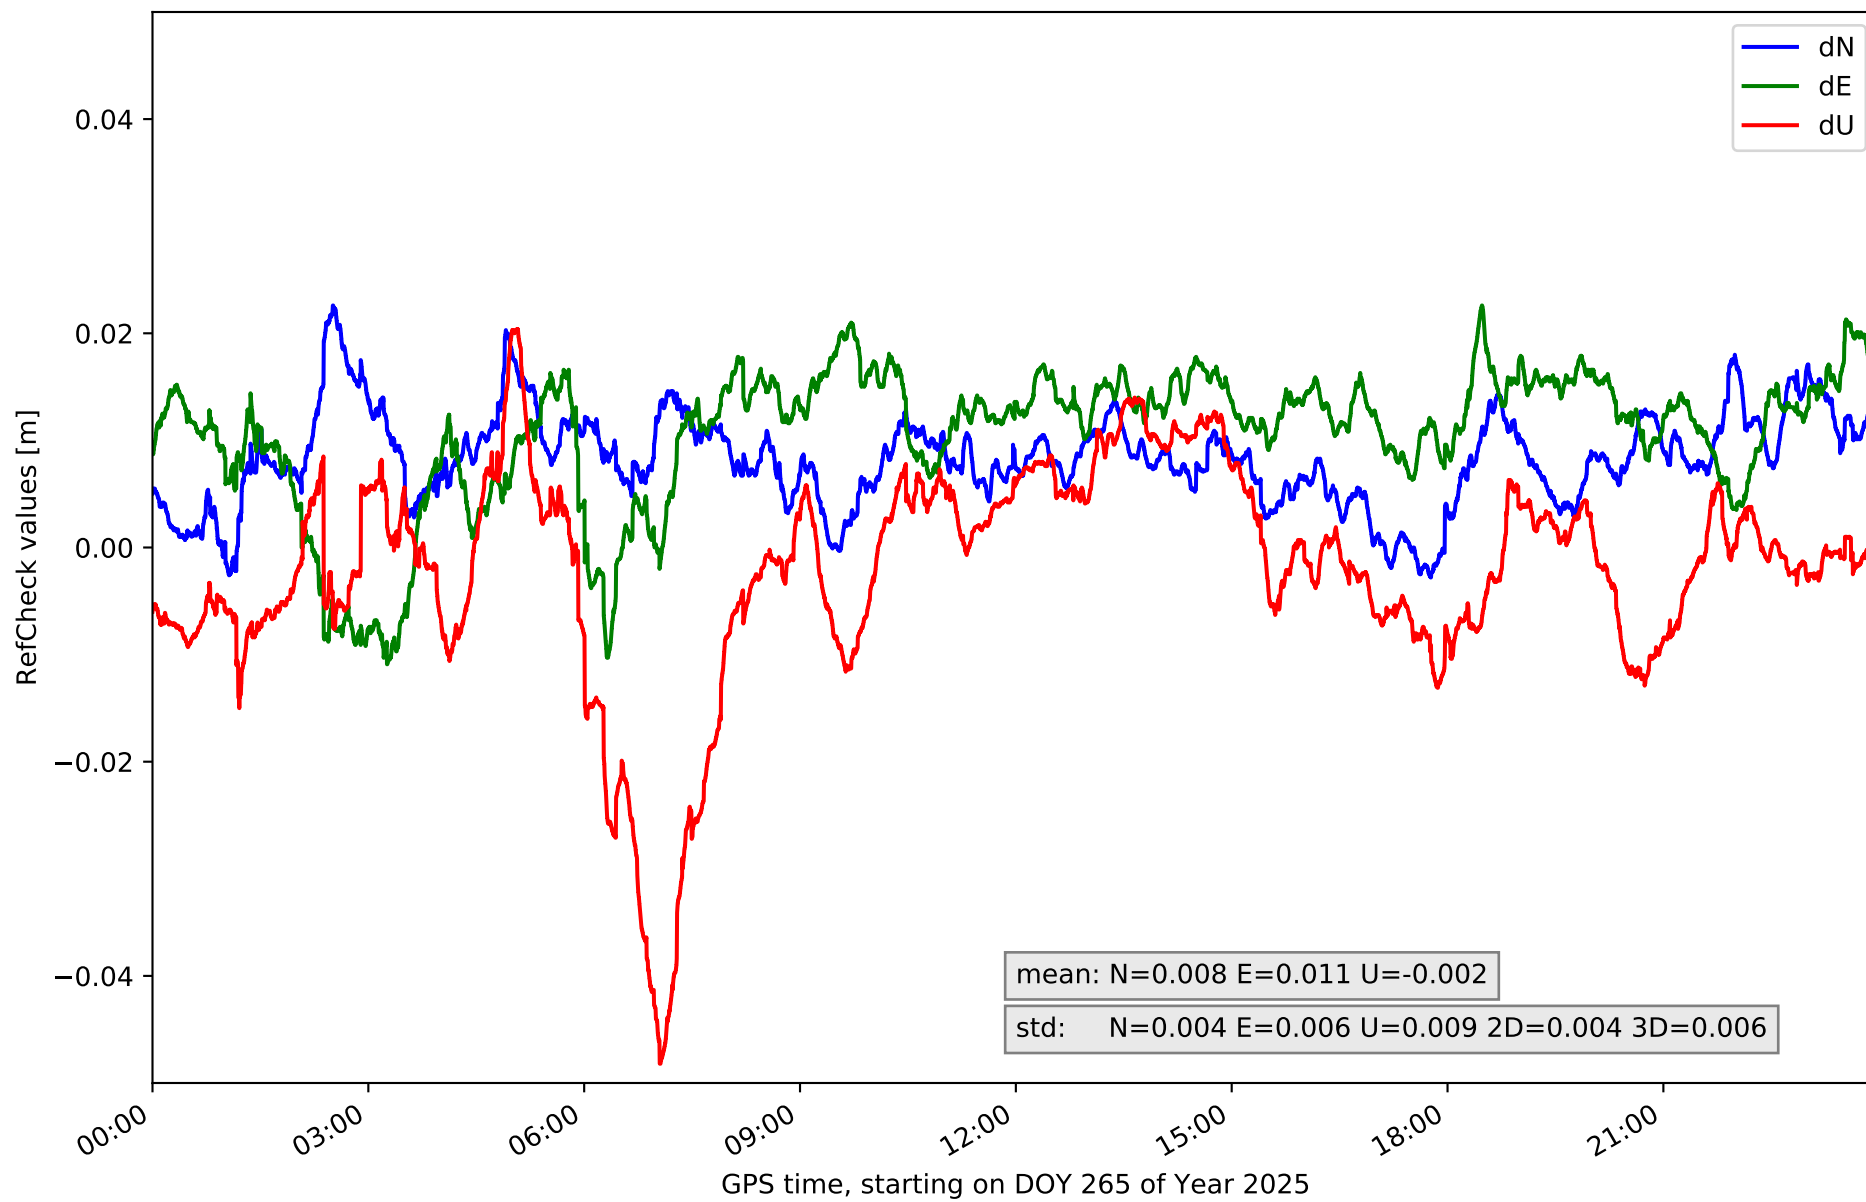


RefCheck for station TN01 in network NT32

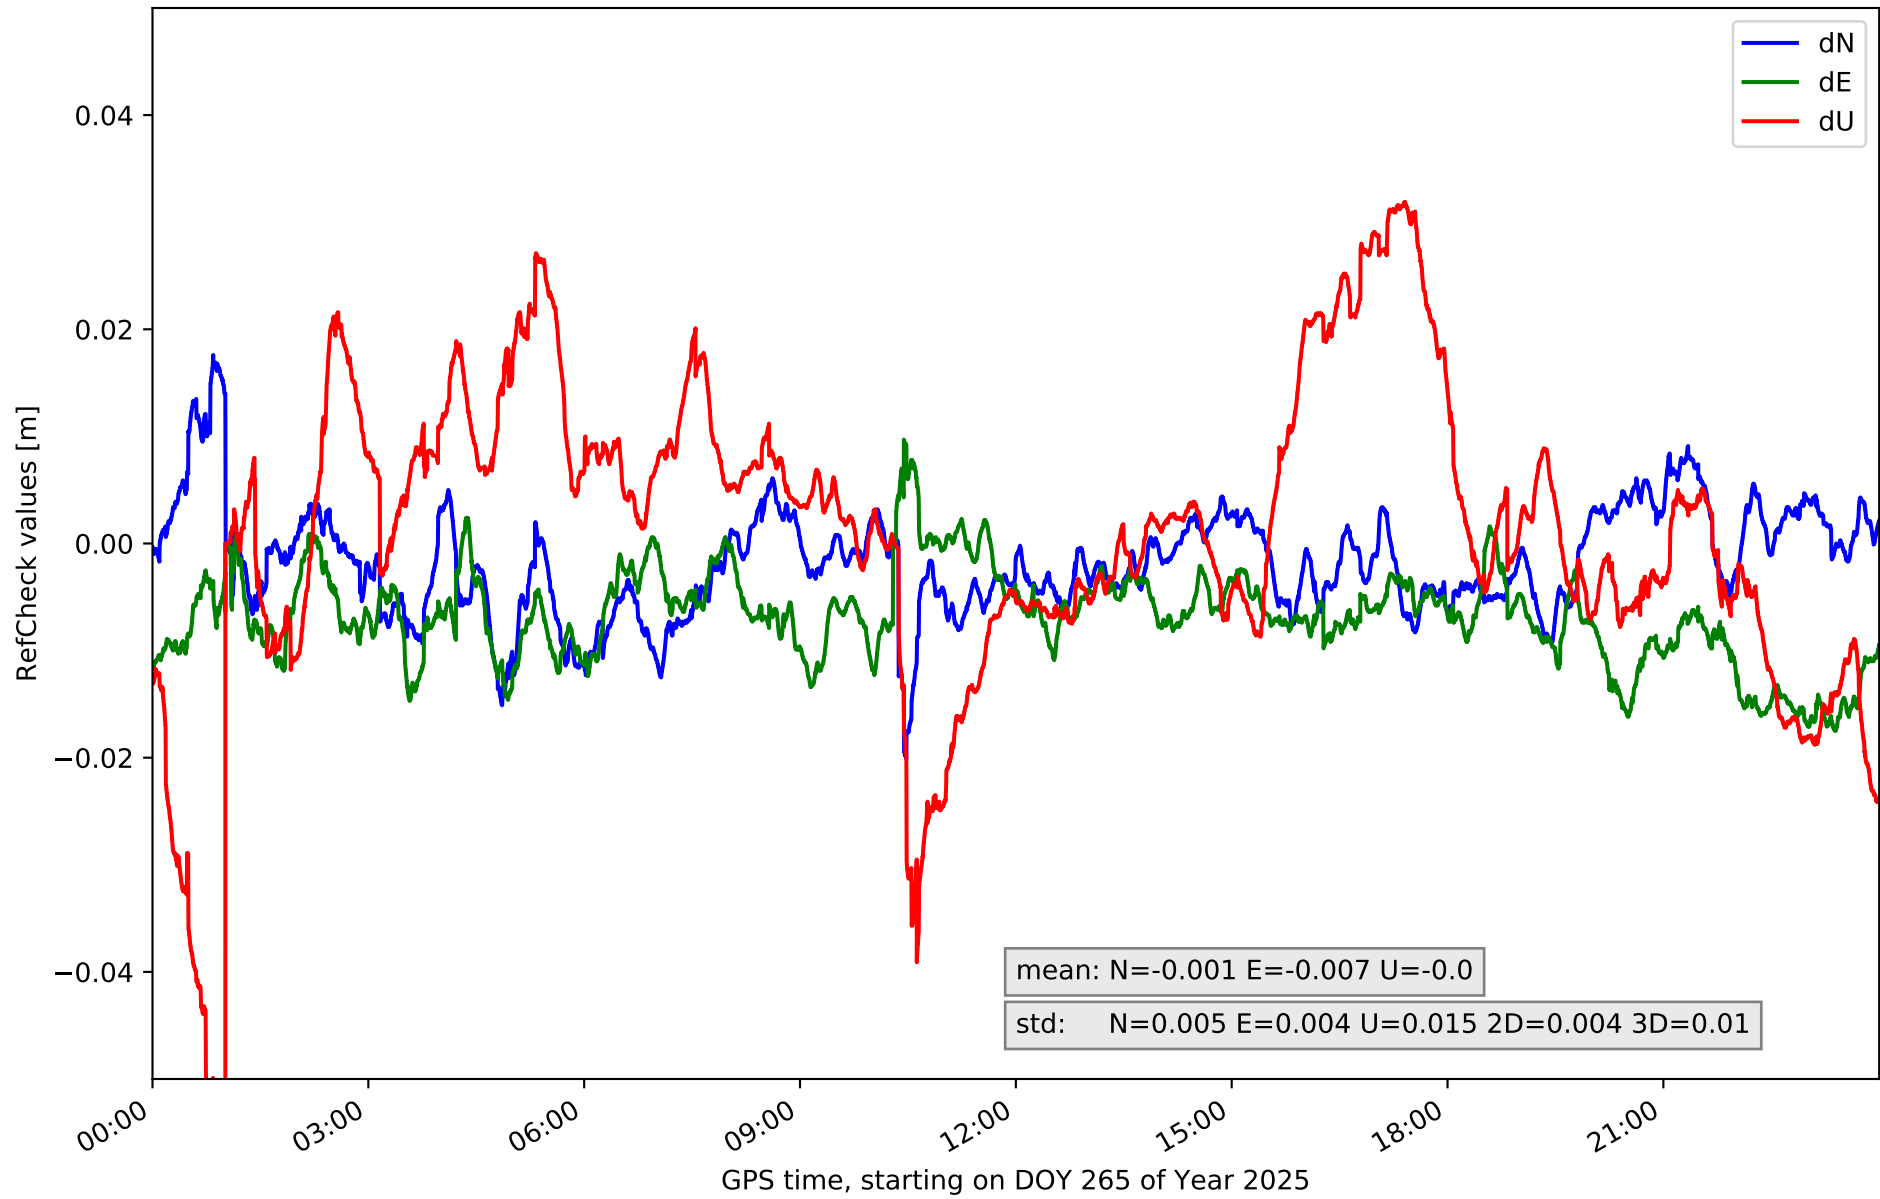


RefCheck for station TN02 in network NT32

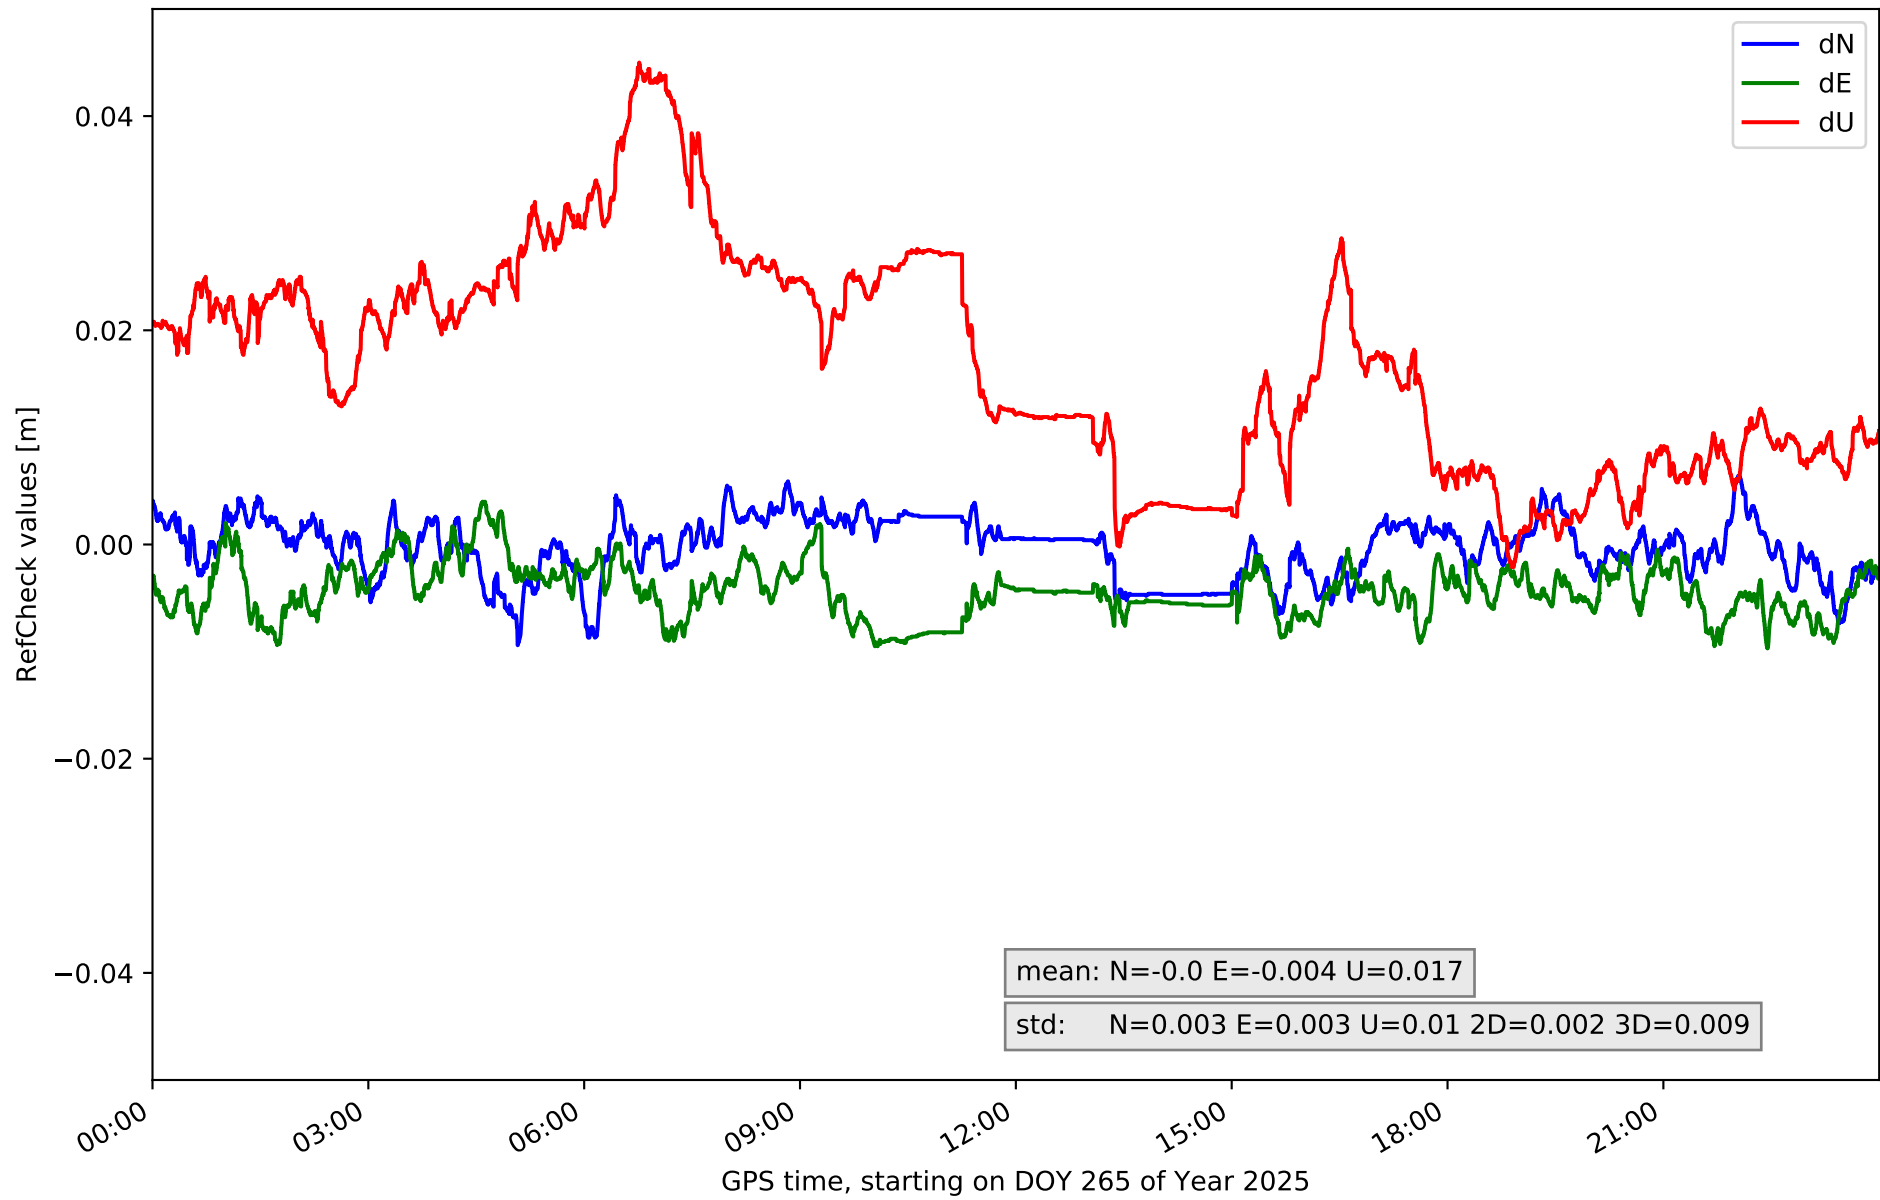


RefCheck for station TN03 in network NT32

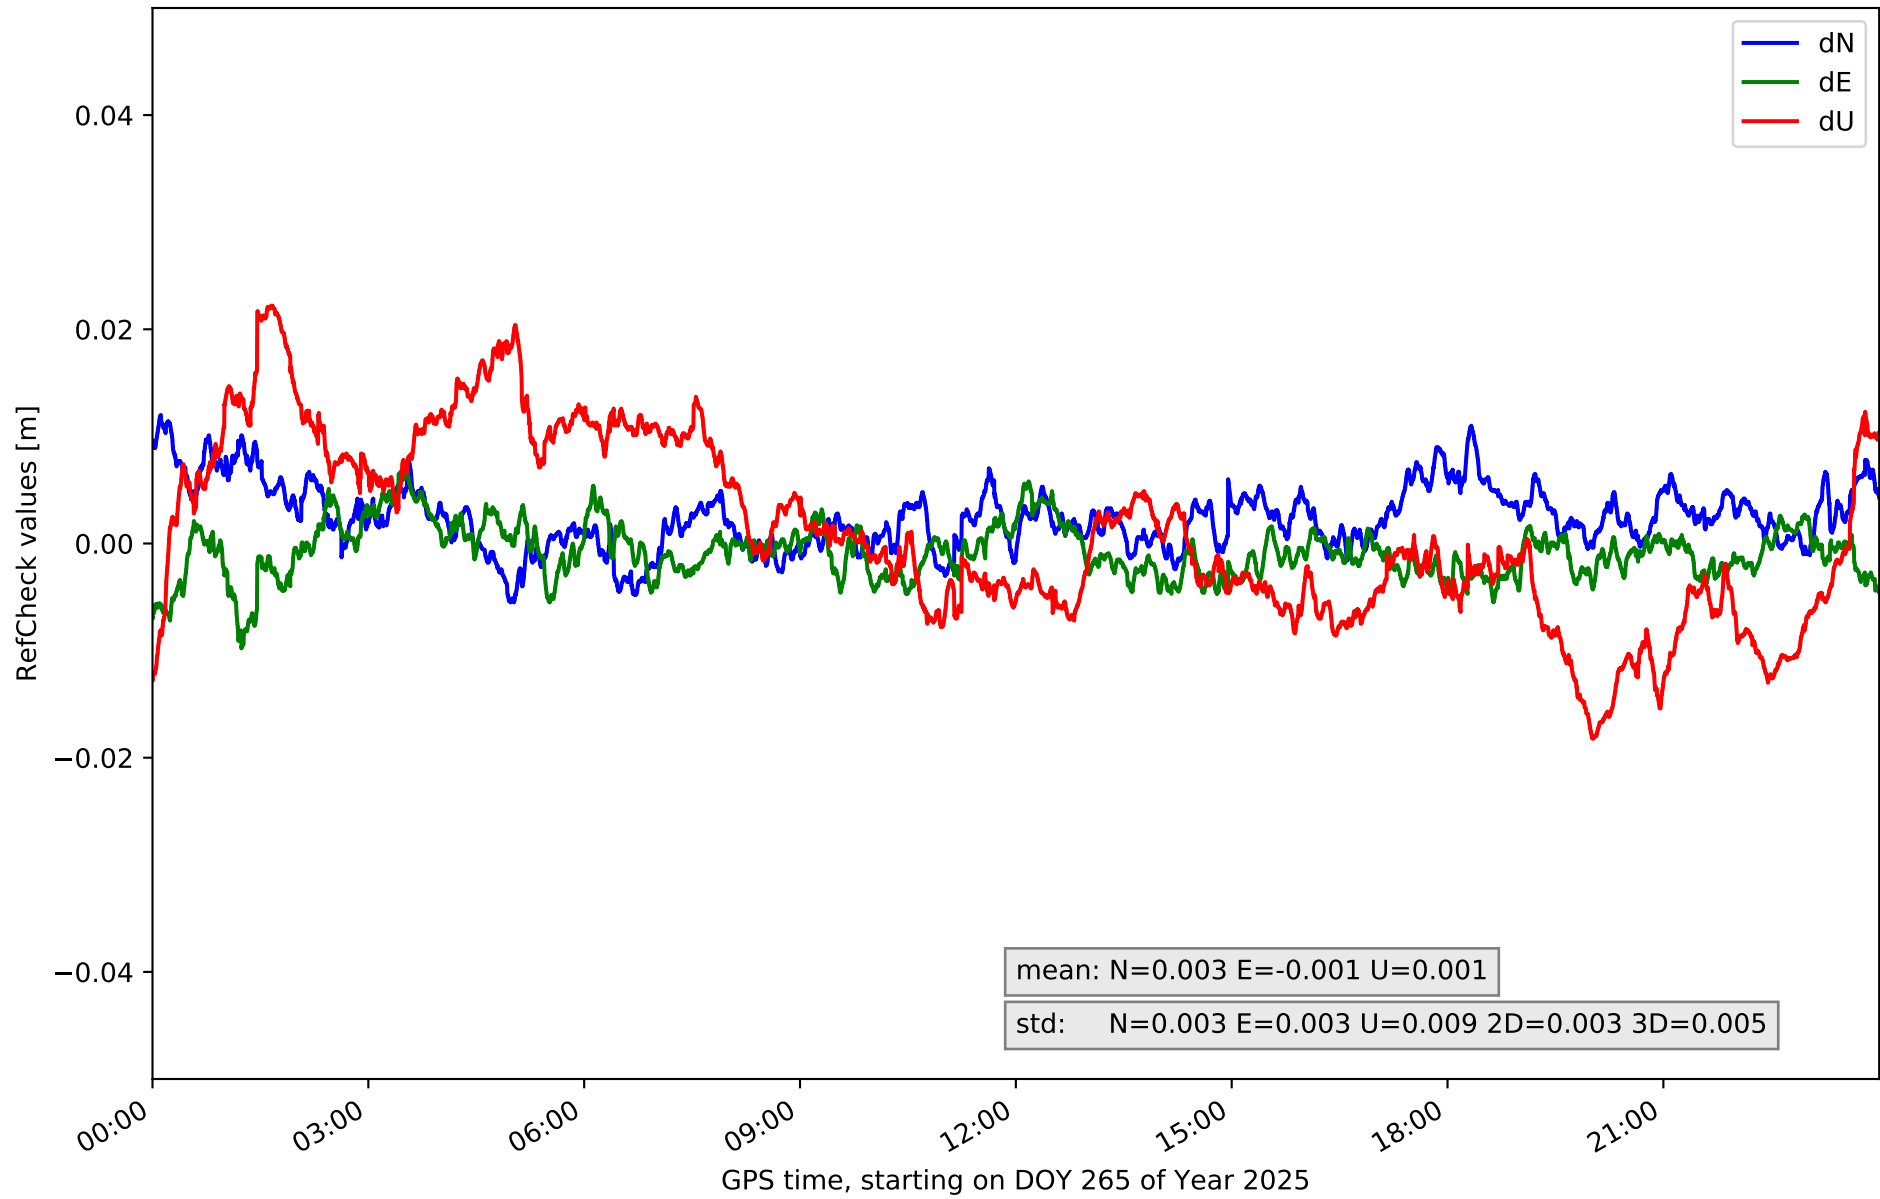


RefCheck for station TN04 in network NT32

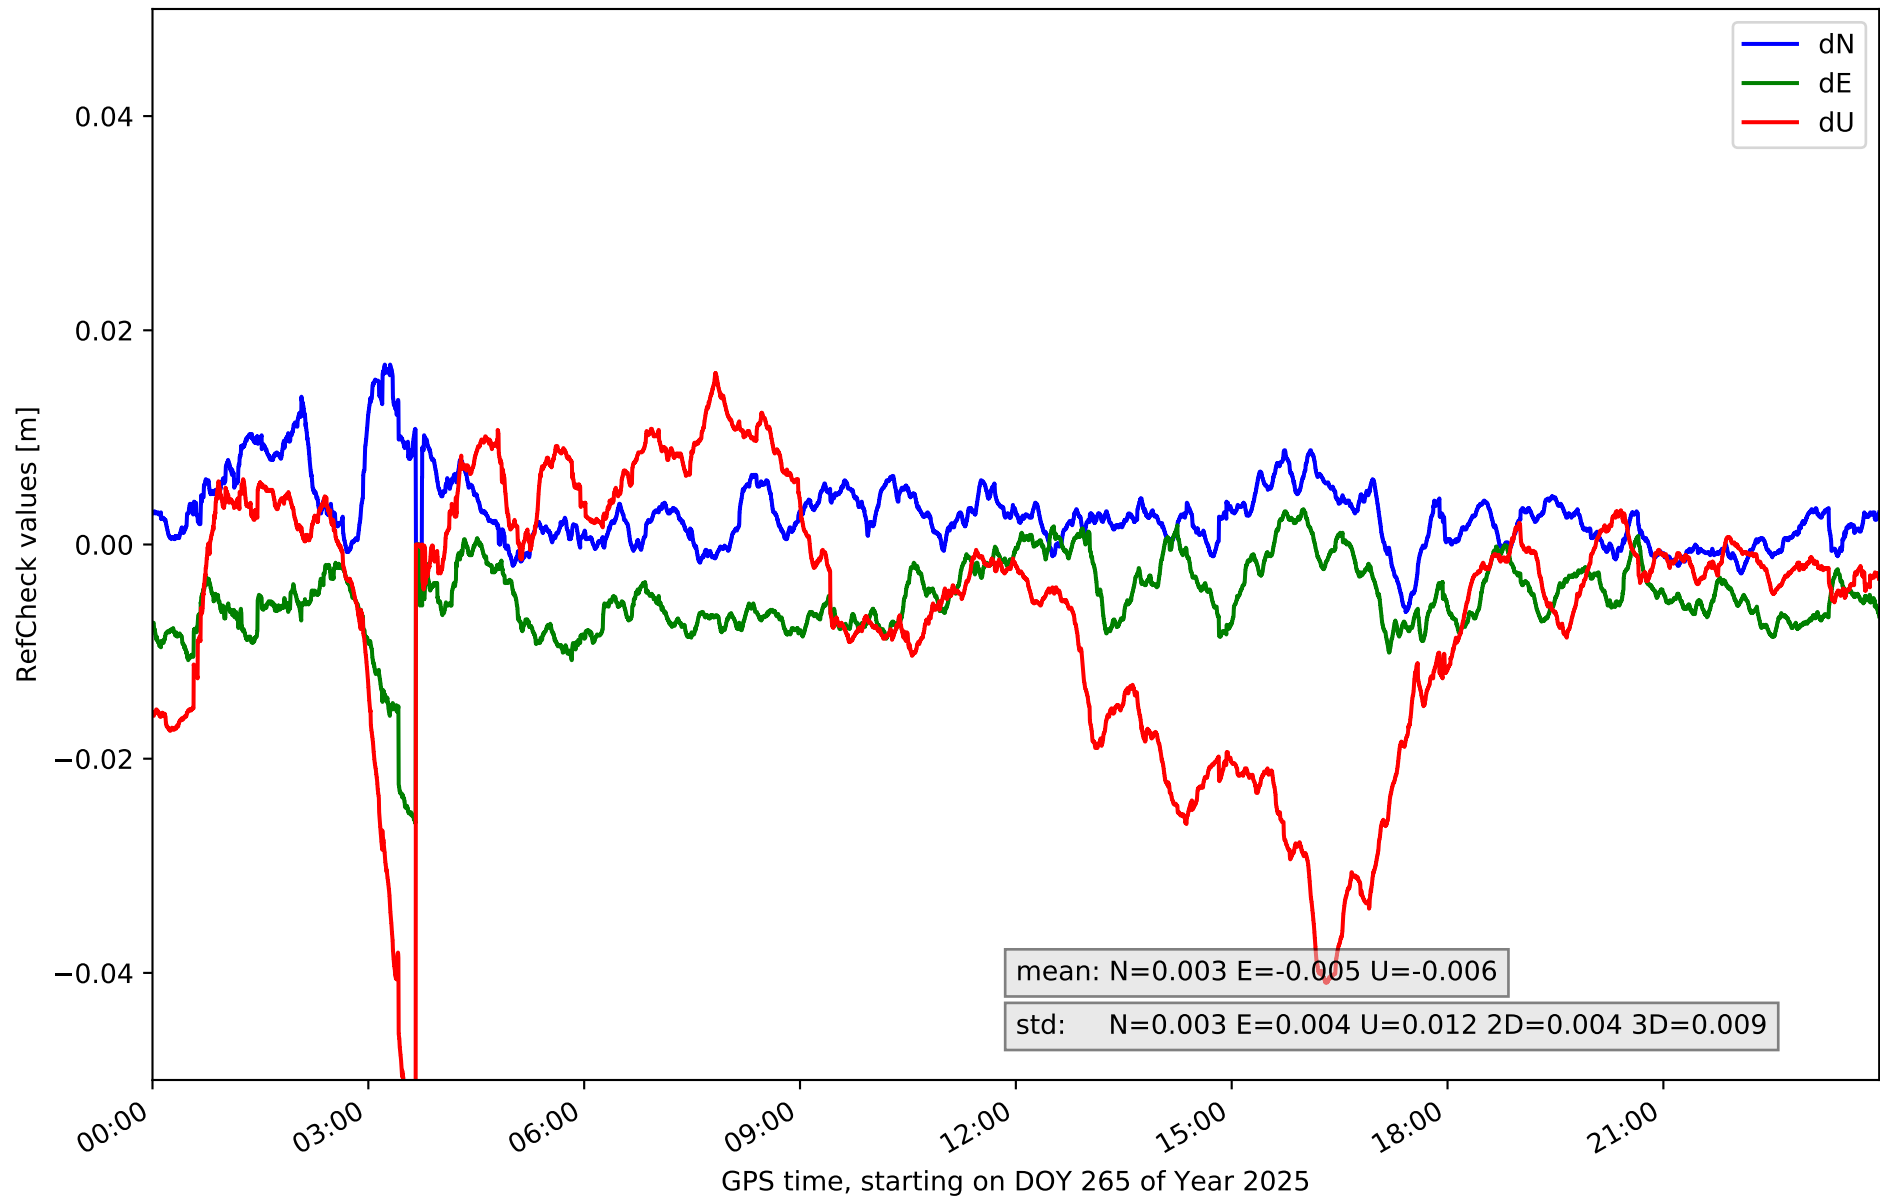


RefCheck for station TN06 in network NT32

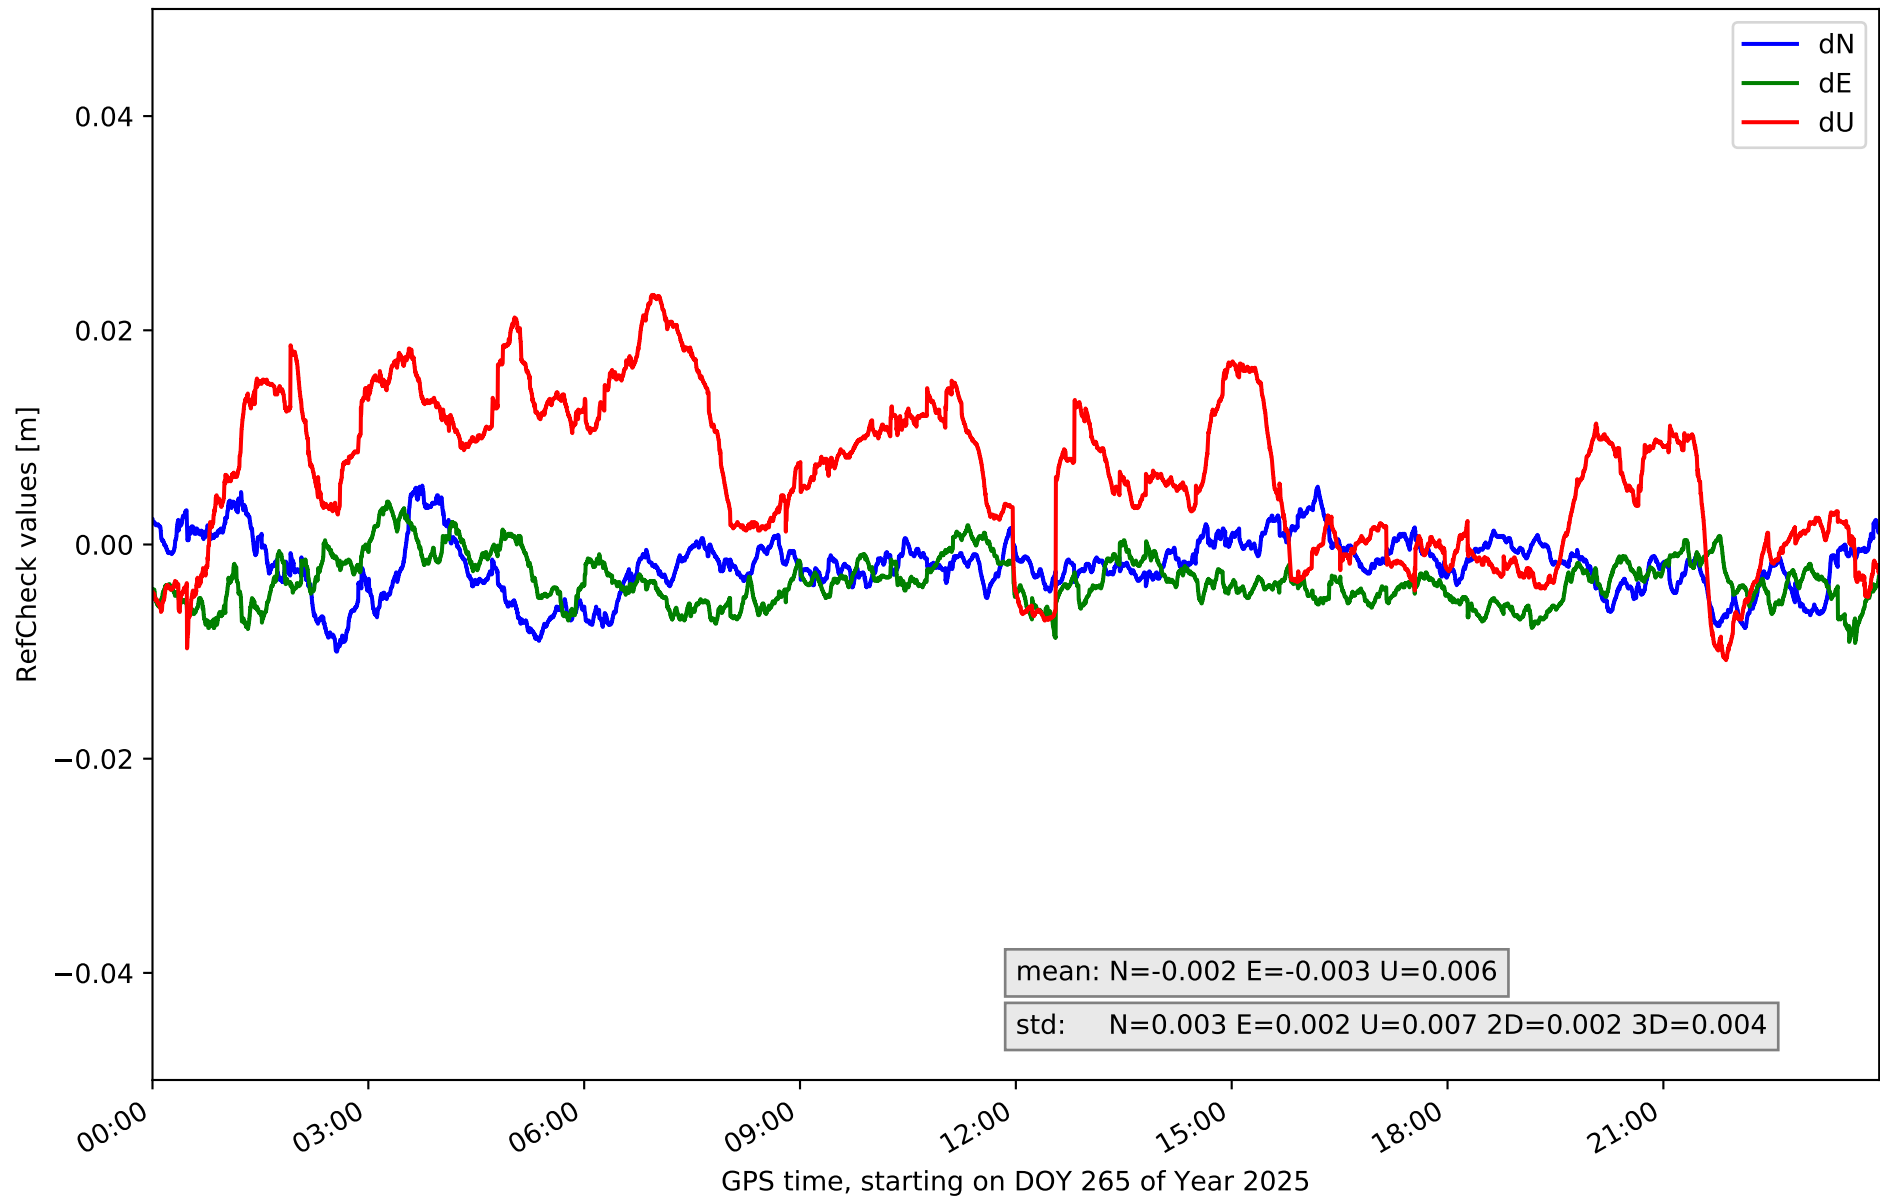

RefCheck for station TN09 in network NT32

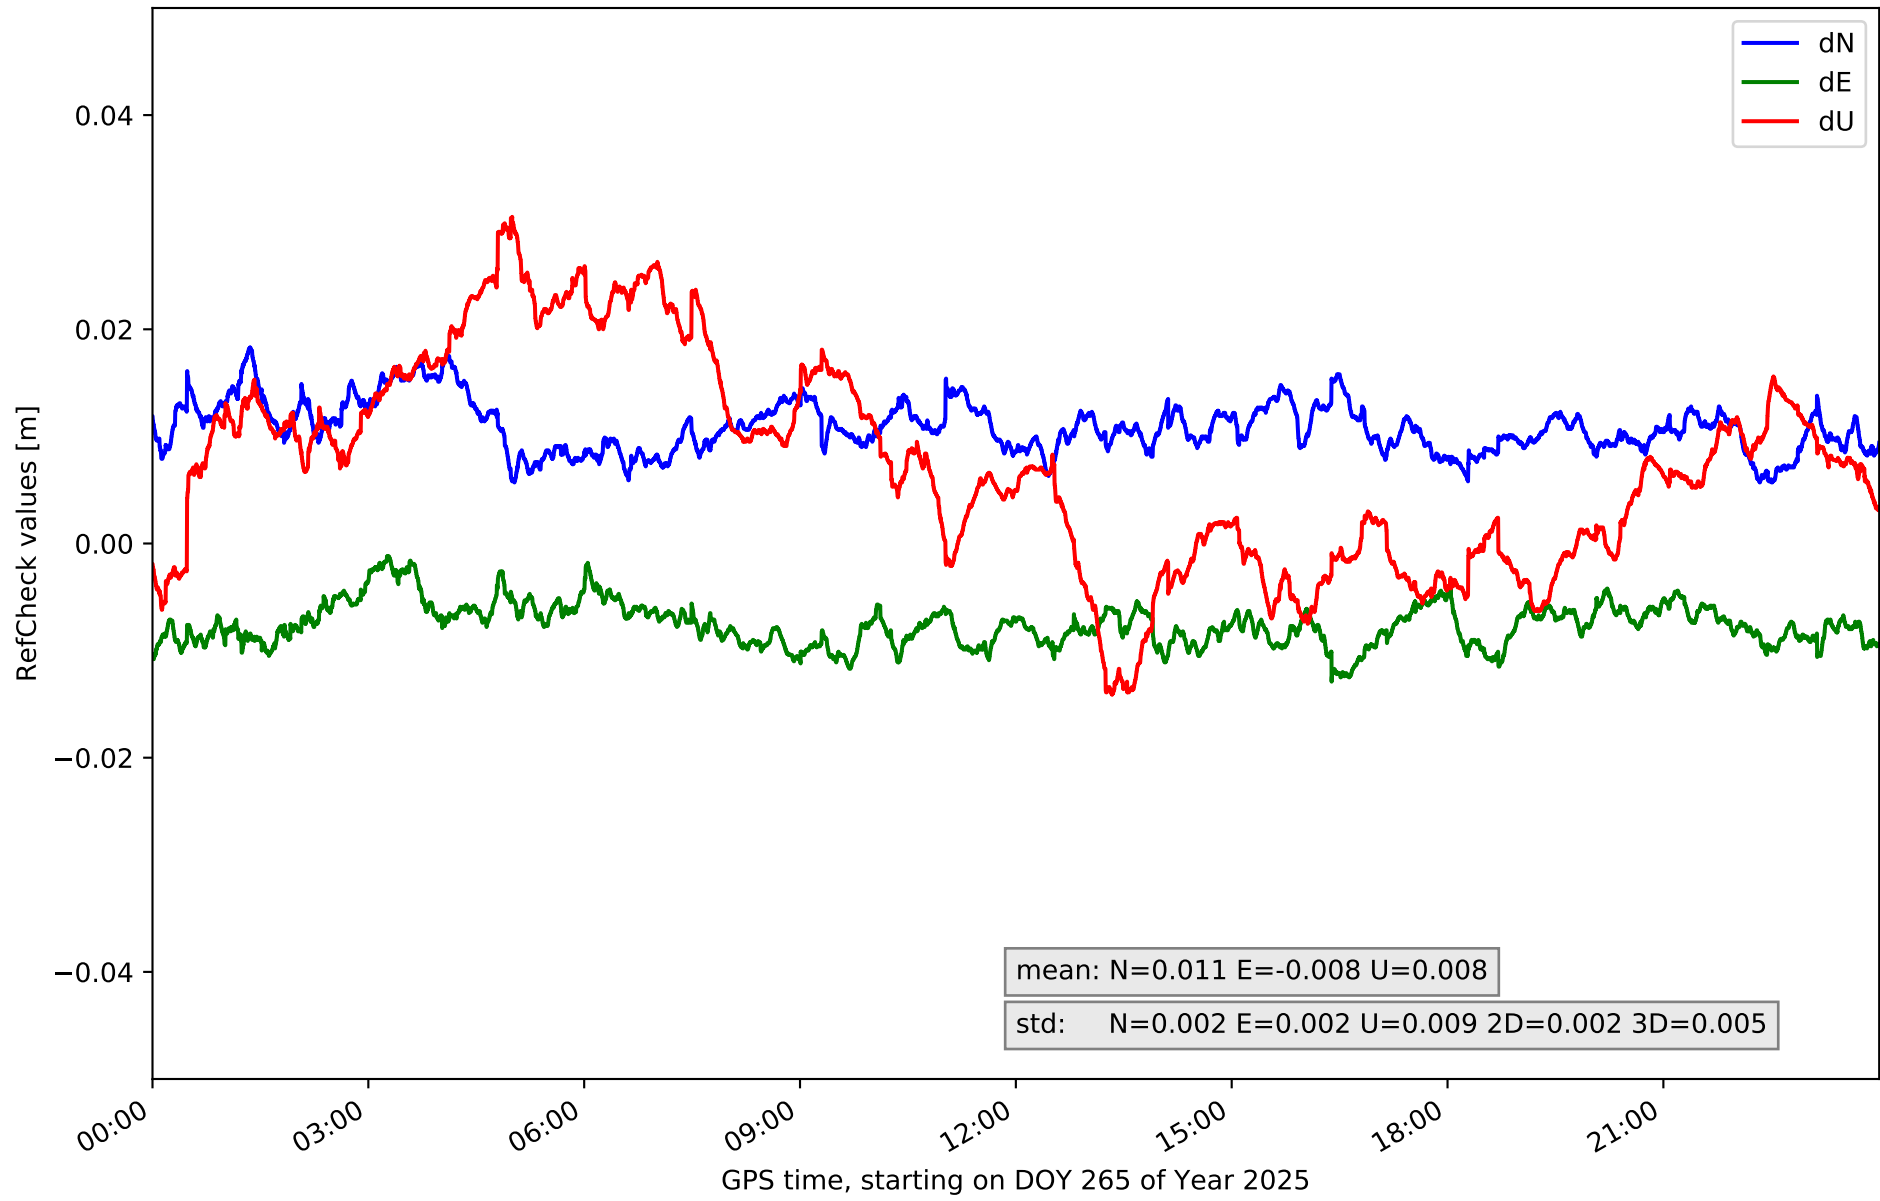

RefCheck for station TE11 in network NT32

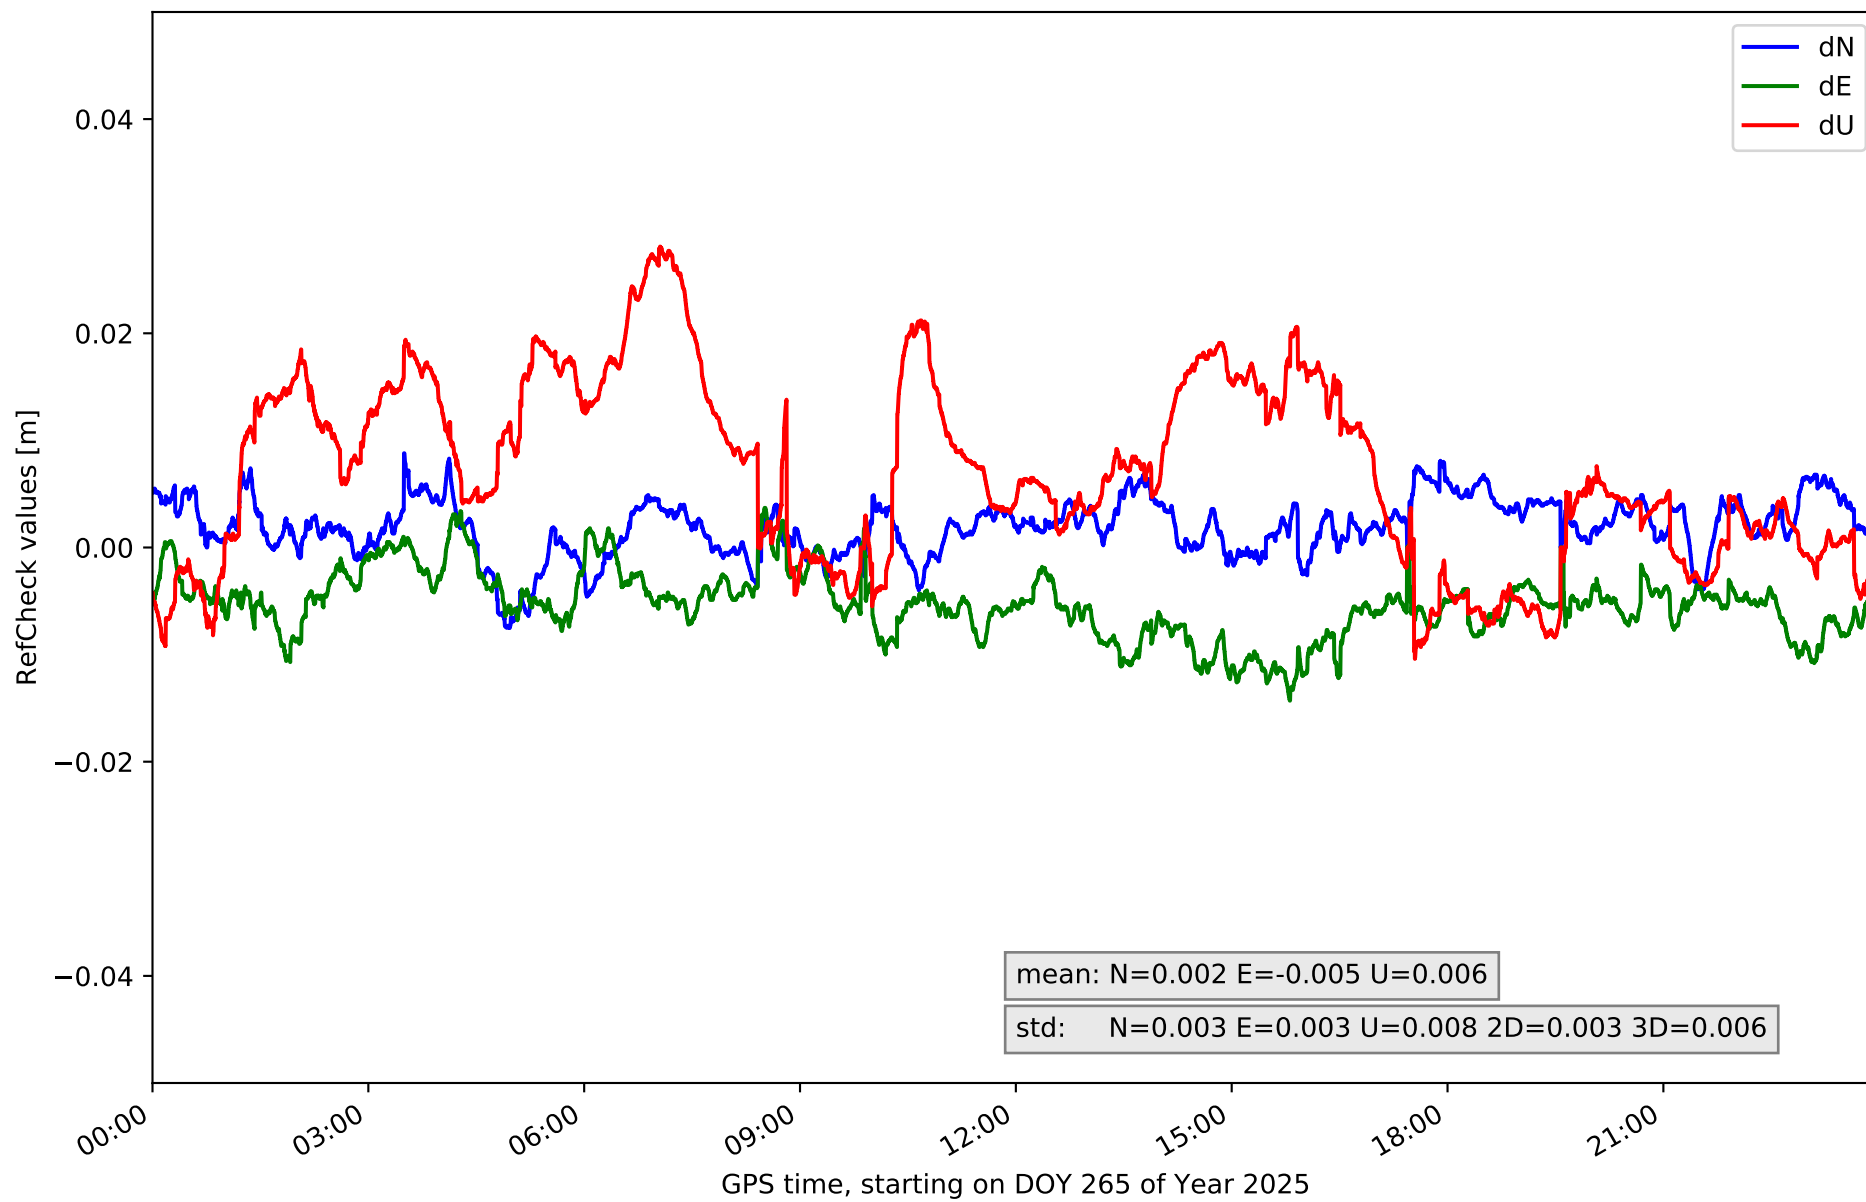

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.032	0.021	0.005	-0.016	0.028	0.007	-0.06	0.018	0.014	0.005	0.008	43554	88.6	17876	36.4
GOM1	-0.017	0.009	0.005	-0.022	0.023	0.005	-0.021	0.033	0.013	0.004	0.006	28069	57.1	11116	22.6
GOME	-0.025	0.009	0.005	-0.014	0.015	0.004	-0.022	0.049	0.014	0.004	0.011	6361	12.9	16161	32.9
IZAN	-0.012	0.01	0.003	-0.013	0.011	0.003	-0.017	0.04	0.008	0.002	0.006	387	0.8	2323	4.7
LP01	-0.019	-0.002	0.003	-0.002	0.017	0.003	-0.004	0.042	0.01	0.003	0.008	45296	92.2	29419	59.9
LP03	-0.011	0.03	0.007	-0.03	0.016	0.007	-0.061	0.035	0.017	0.006	0.013	11668	23.7	11554	23.5
LPAL	-0.016	-0.003	0.003	0.005	0.02	0.003	-0.013	0.032	0.009	0.003	0.005	47773	97.2	9153	18.6
LRES	-0.003	0.023	0.004	-0.011	0.023	0.006	-0.048	0.02	0.009	0.004	0.006	43457	88.4	11863	24.1
TN01	-0.02	0.018	0.005	-0.018	0.01	0.004	-0.063	0.032	0.015	0.004	0.01	17122	34.8	12872	26.2
TN02	-0.009	0.006	0.003	-0.01	0.004	0.003	-0.002	0.045	0.01	0.002	0.009	358	0.7	22617	46.0
TN03	-0.005	0.012	0.003	-0.01	0.007	0.003	-0.018	0.022	0.009	0.003	0.005	2045	4.2	1338	2.7
TN04	-0.006	0.017	0.003	-0.026	0.003	0.004	-0.06	0.016	0.012	0.004	0.009	4908	10.0	7574	15.4
TN06	-0.01	0.005	0.003	-0.009	0.004	0.002	-0.011	0.023	0.007	0.002	0.004	69	0.1	1258	2.6
TN09	0.006	0.018	0.002	-0.013	-0.001	0.002	-0.014	0.03	0.009	0.002	0.005	46380	94.4	12079	24.6
TE11	-0.007	0.009	0.003	-0.014	0.004	0.003	-0.01	0.028	0.008	0.003	0.006	4810	9.8	3907	8.0
Mean	-0.012	0.012	0.004	-0.014	0.012	0.004	-0.028	0.031	0.011	0.003	0.007	20150.5	41.0	11407.3	23.2
Min/Max	-0.032	0.03	0.007	-0.03	0.028	0.007	-0.063	0.049	0.017	0.006	0.013	47773	97.2	29419	59.9

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	90.3	88.6	90.8	93.2	90.3
considering satellites with dual-frequency fixed	82.3	80.1	69.3	90.1	88.0
considering all signals separately	81.8	77.5	69.3	90.3	85.4