

summary for network N32T

timeperiod chosen: from 2025-10-03-00:00:00 until 2025-10-03-23:59:58

average update rate (durations larger than 15 seconds considered as observation gap): 1.9 seconds


average fixing percentage with threshold set to 0.3: 85.2 percent

stations available: 14 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

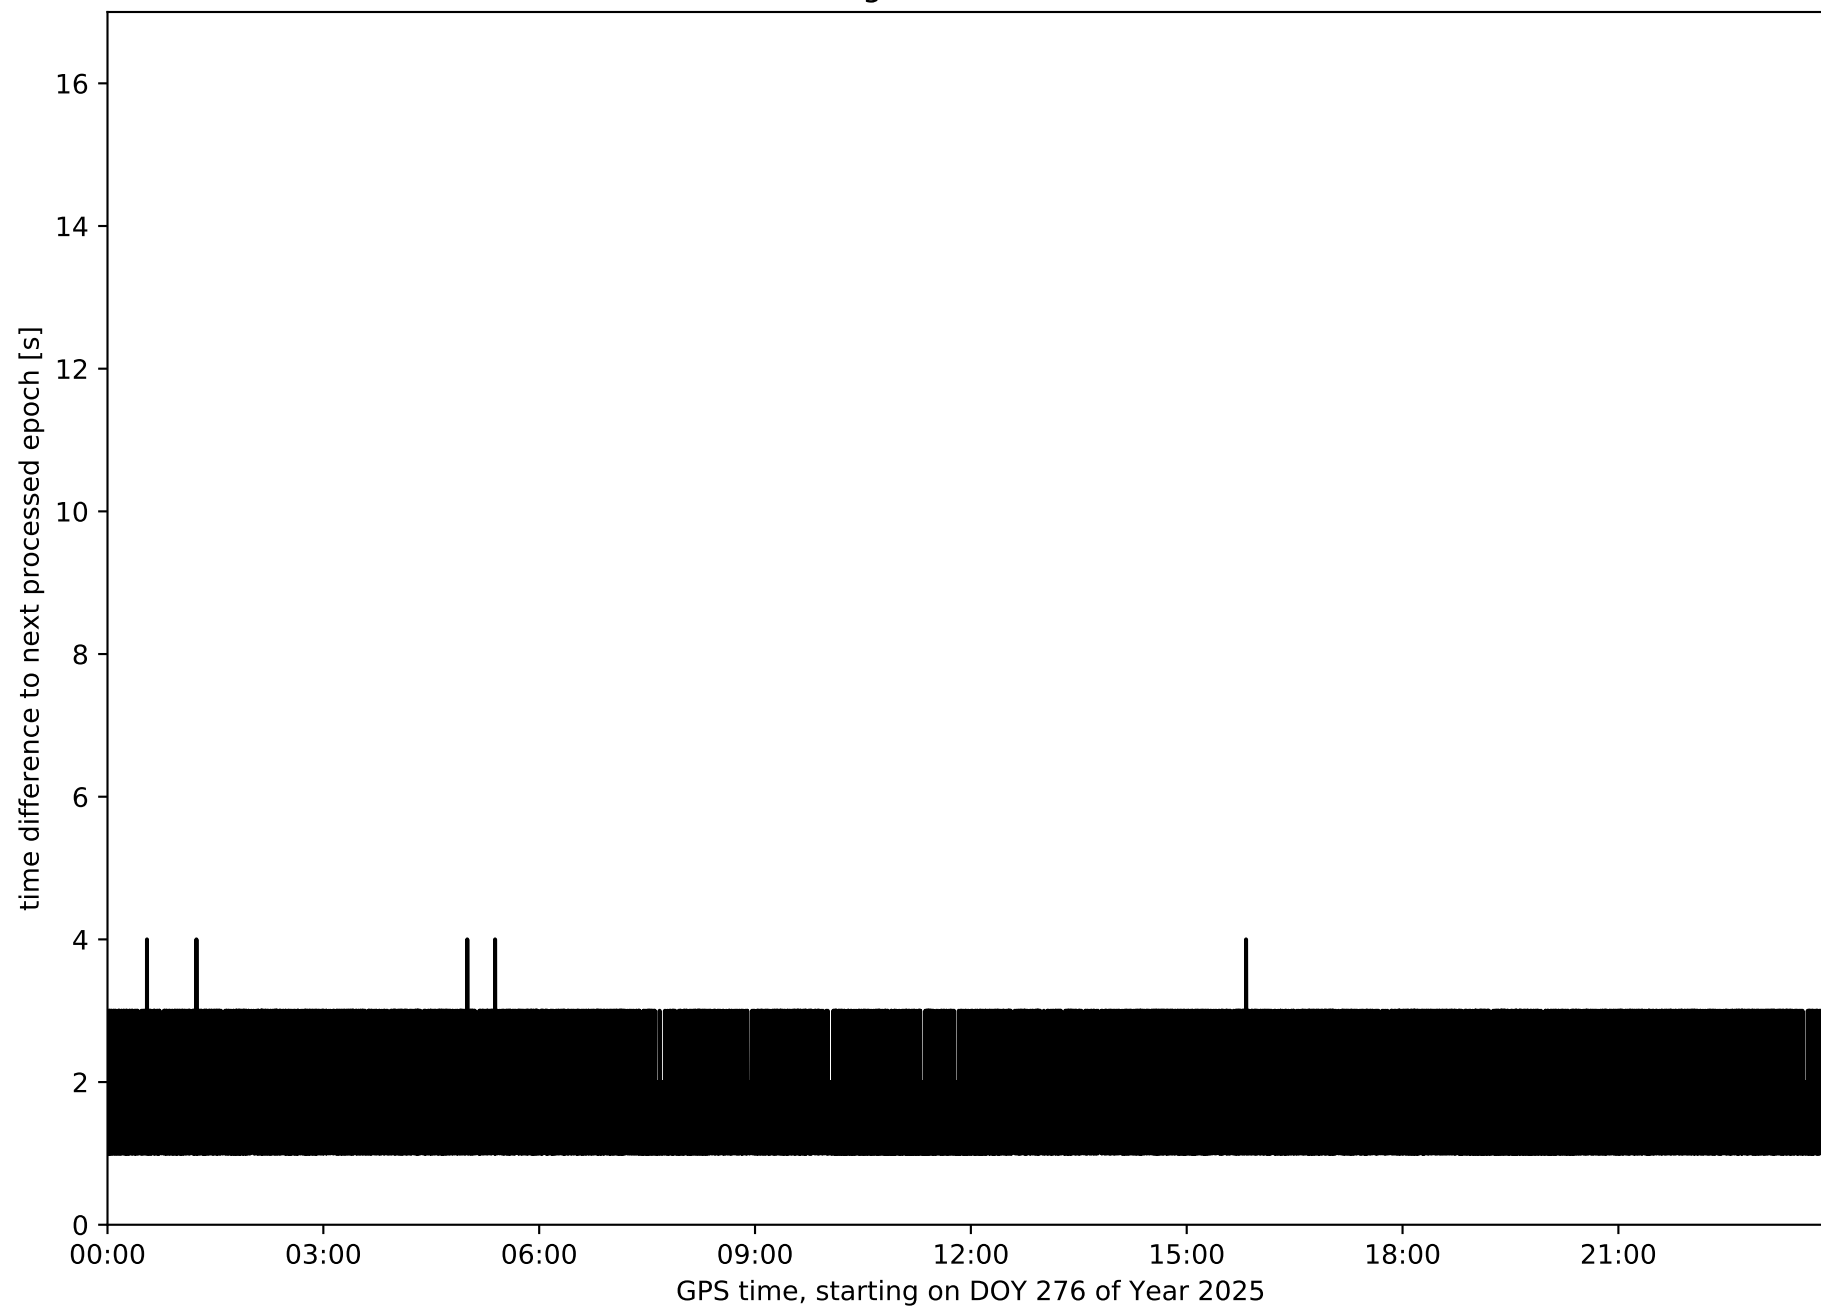


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

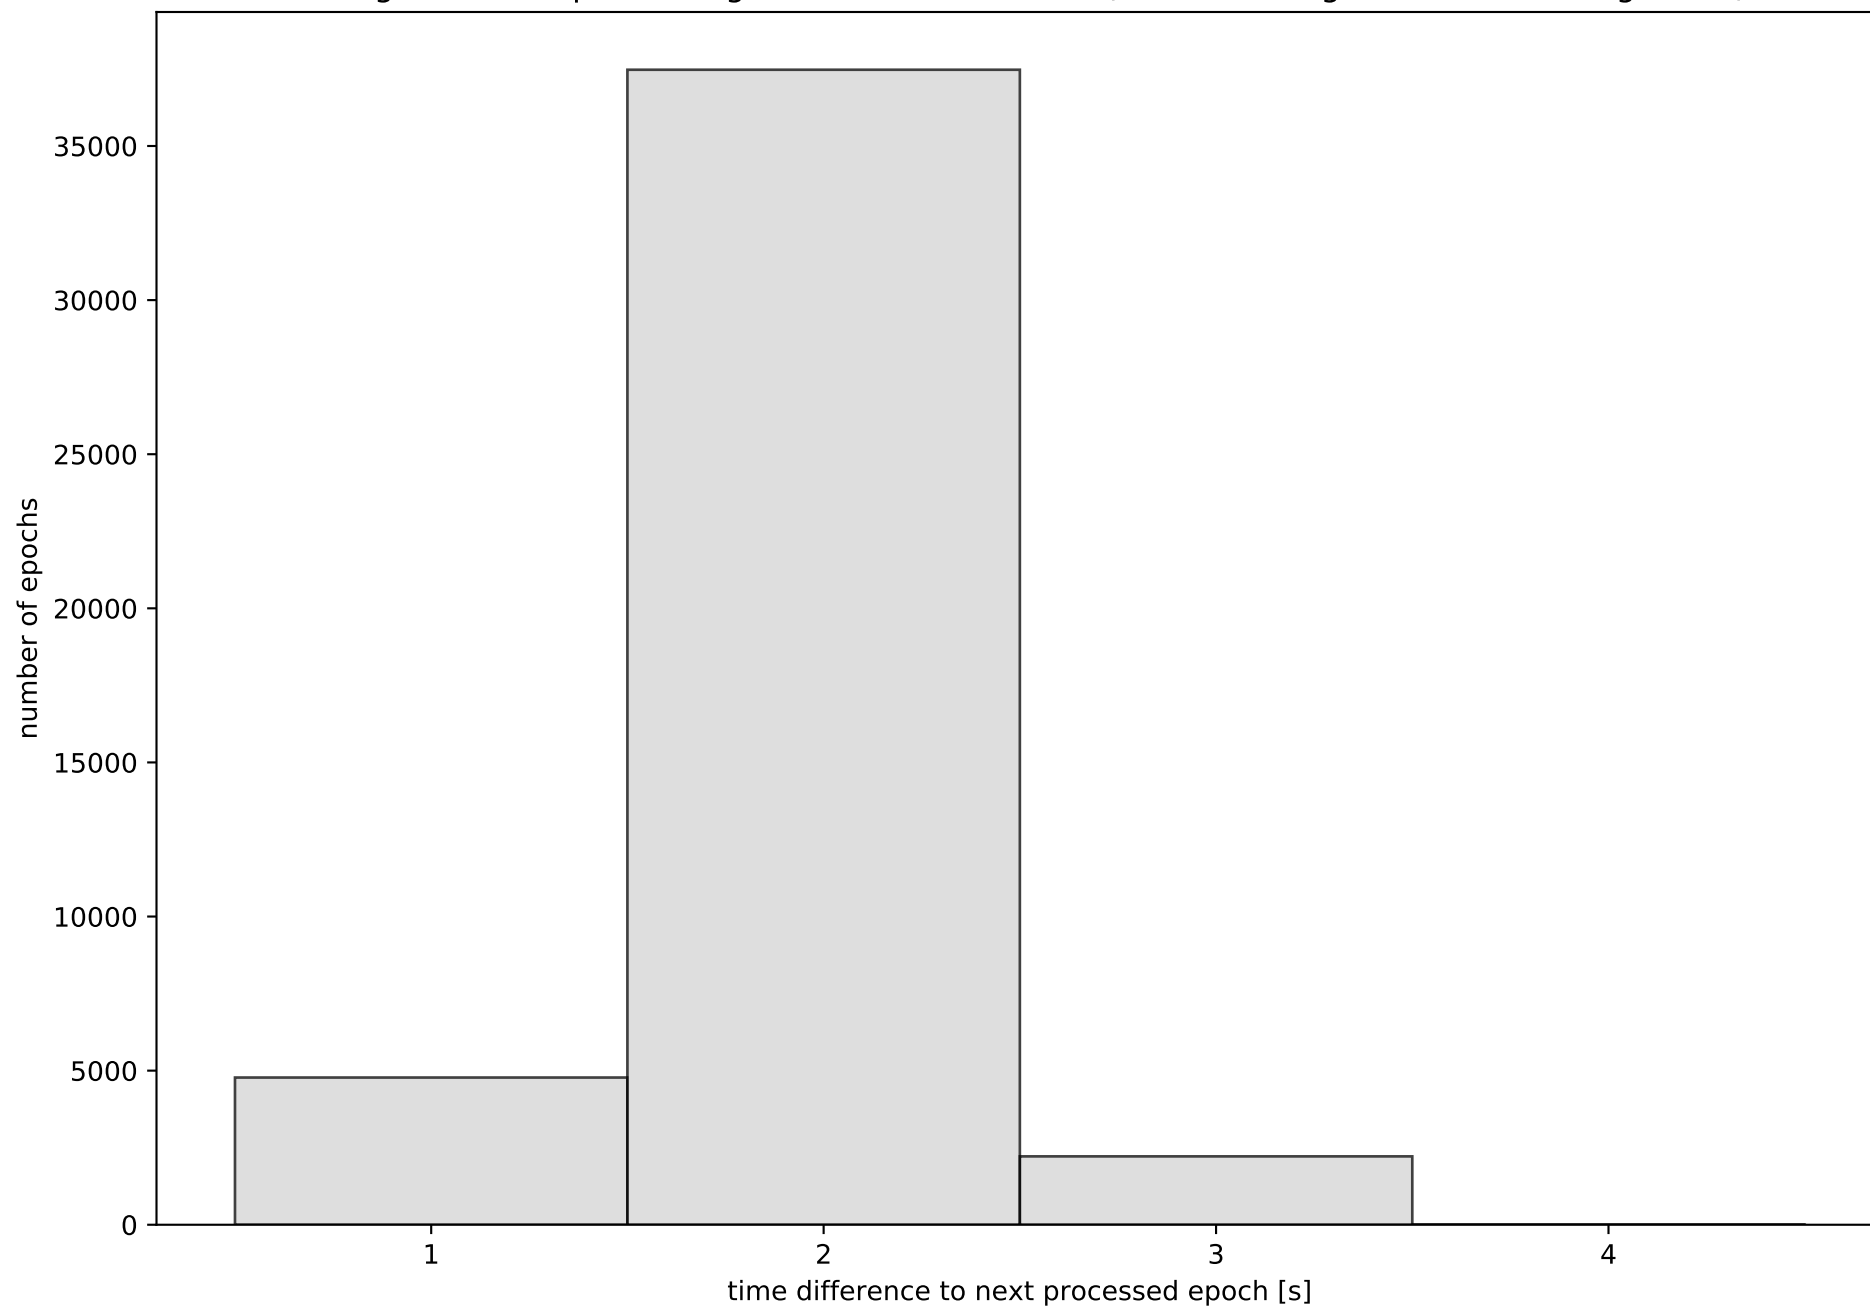


Network N32T with threshold set to 0.3

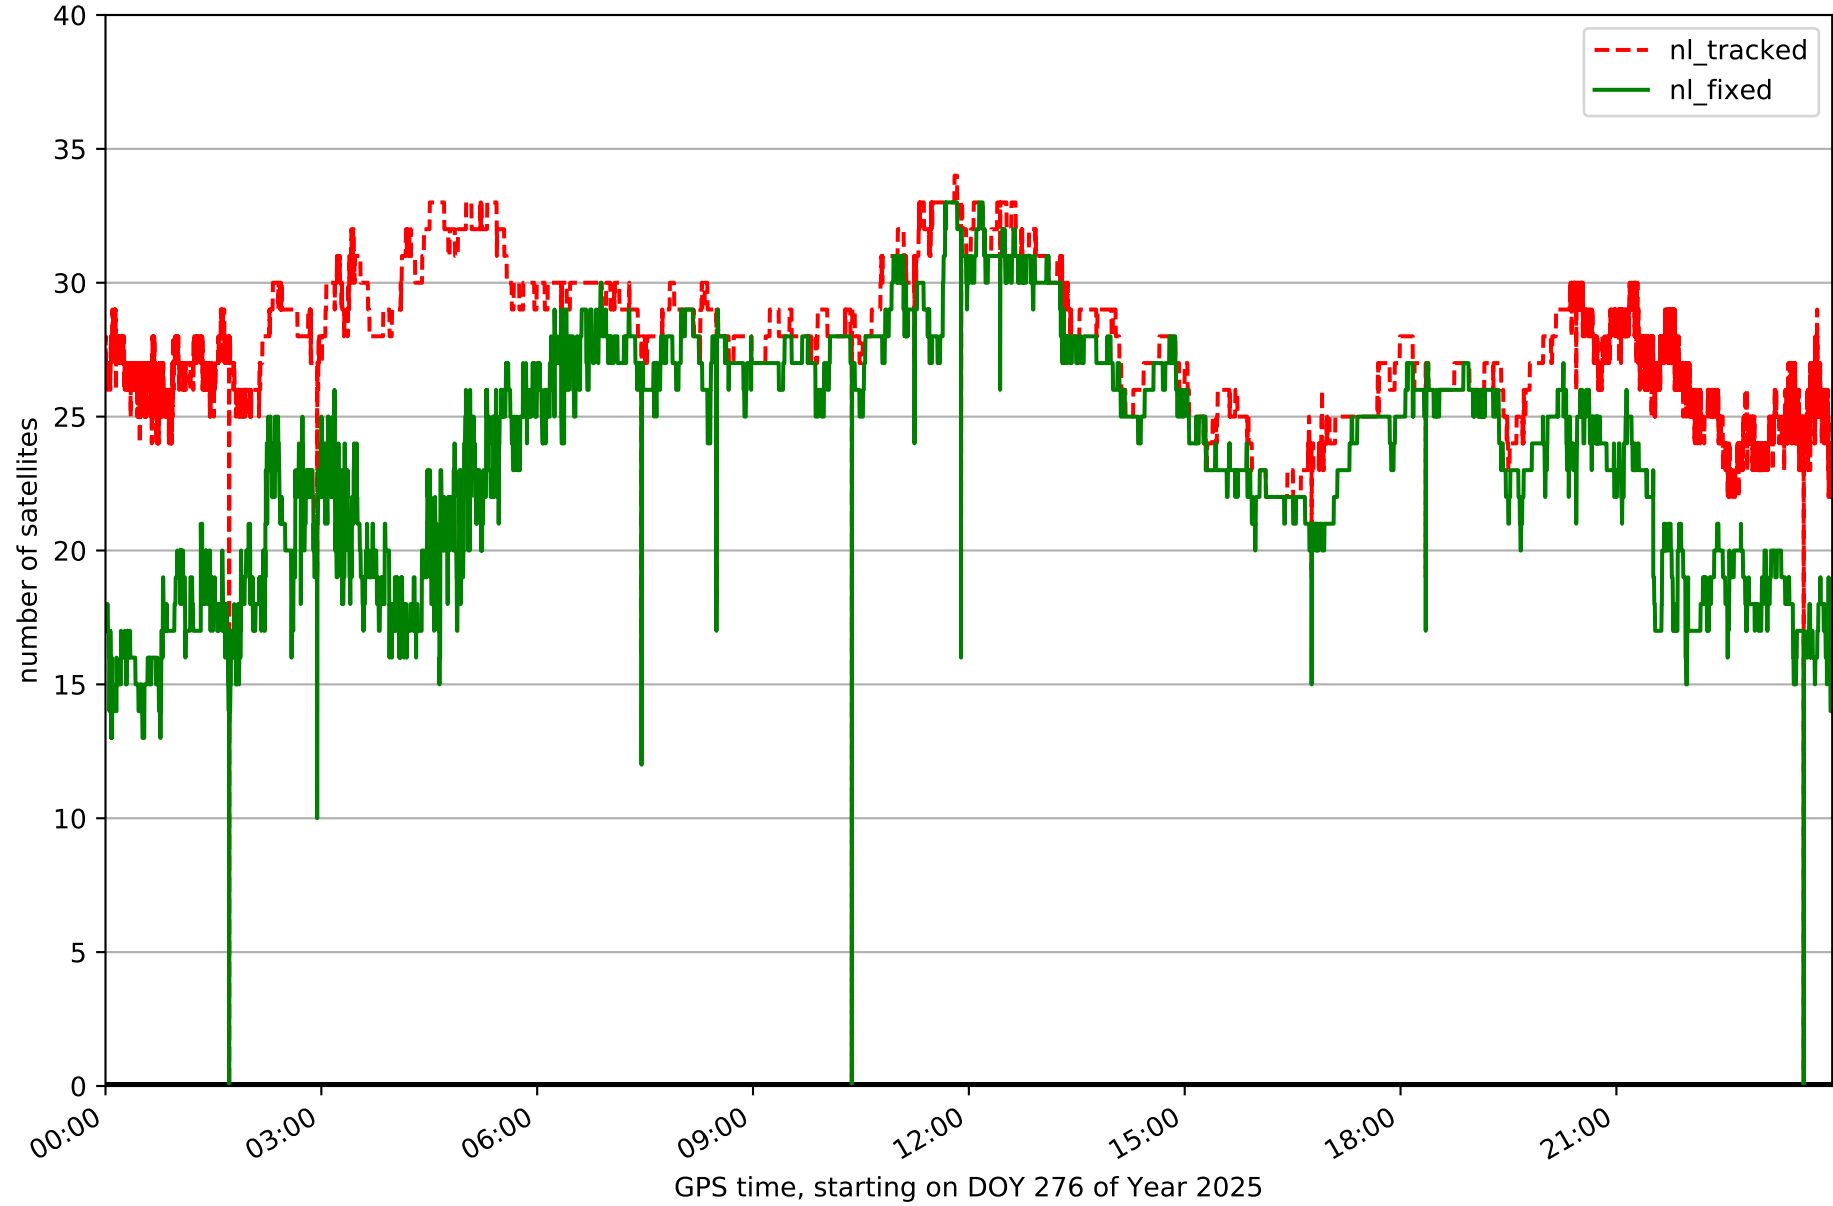


Fixing percentage of satellites in network N32T with threshold set to 0.3

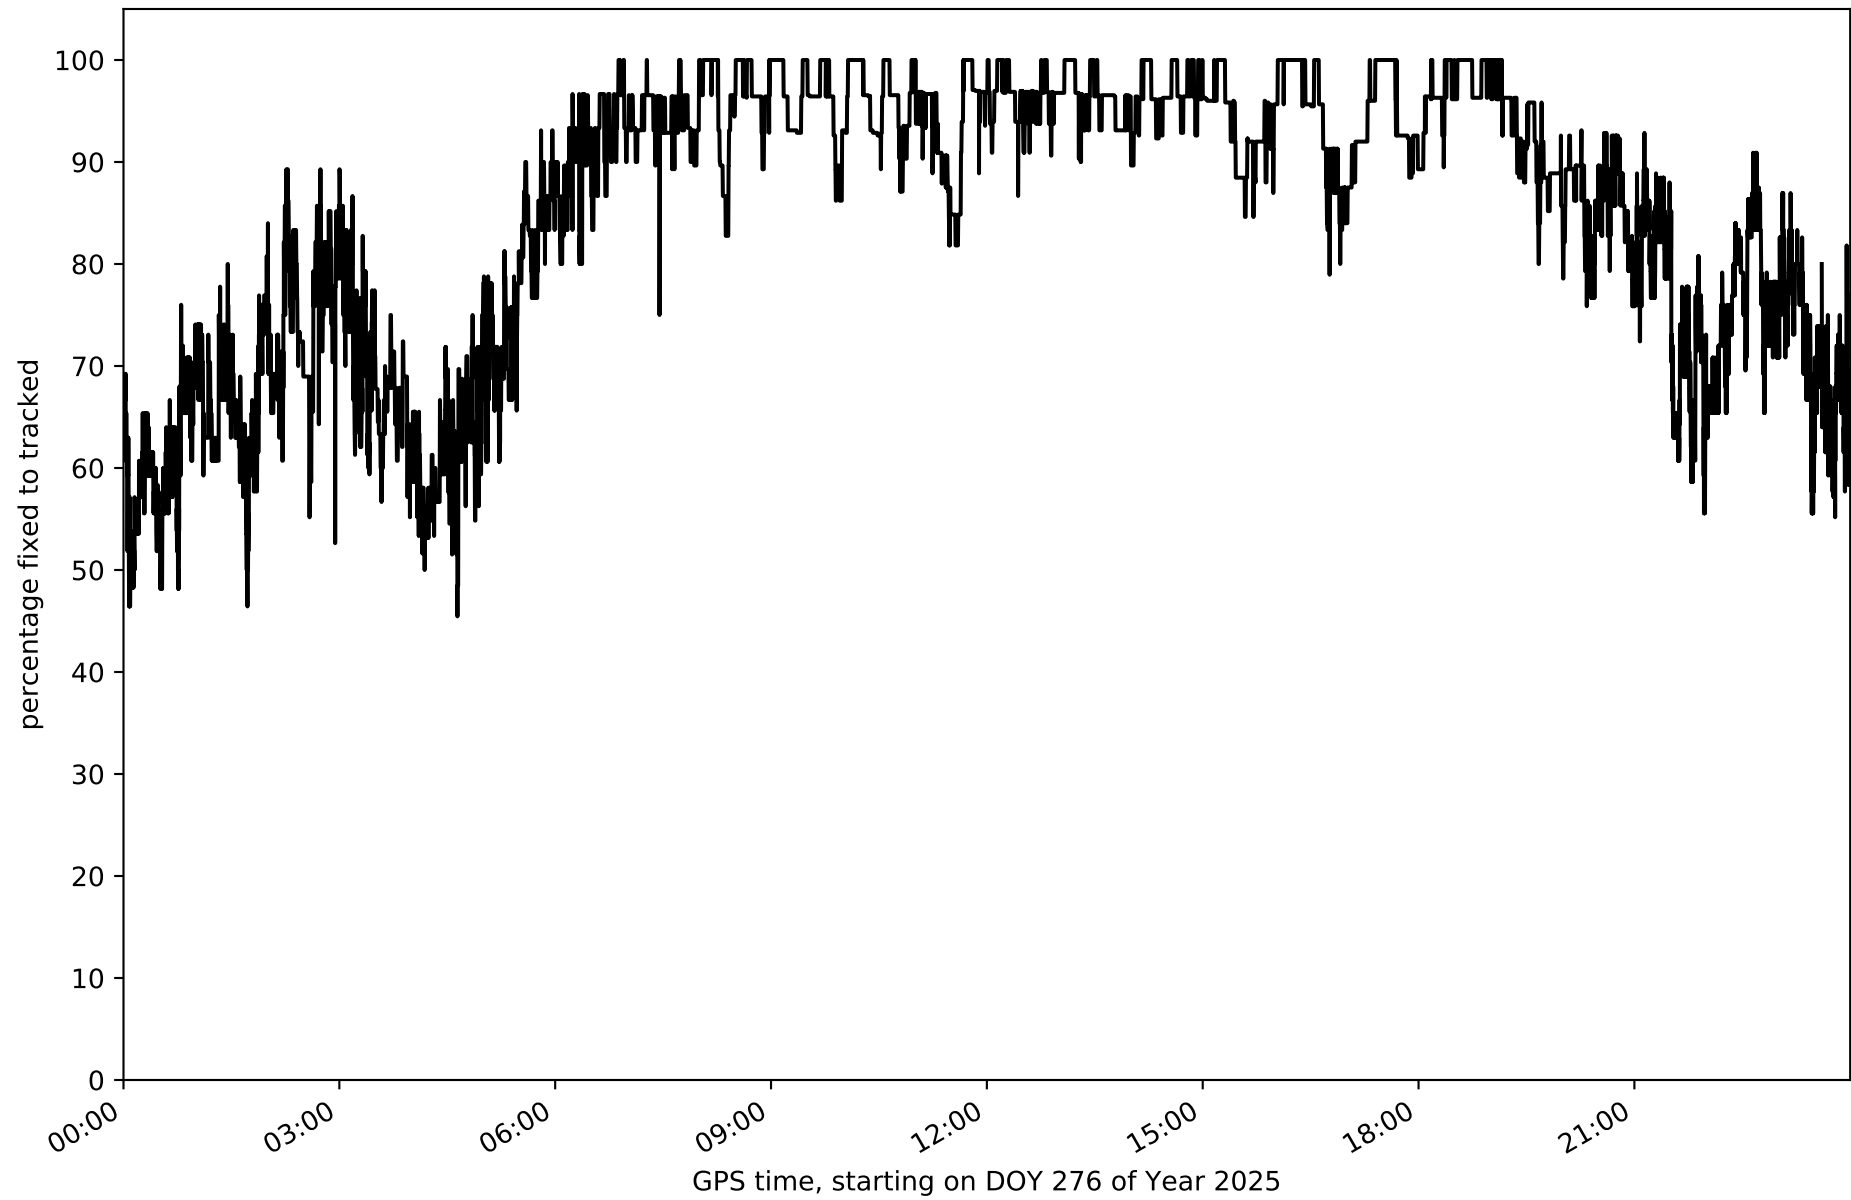


Network N32T - only GPS with threshold set to 0.3

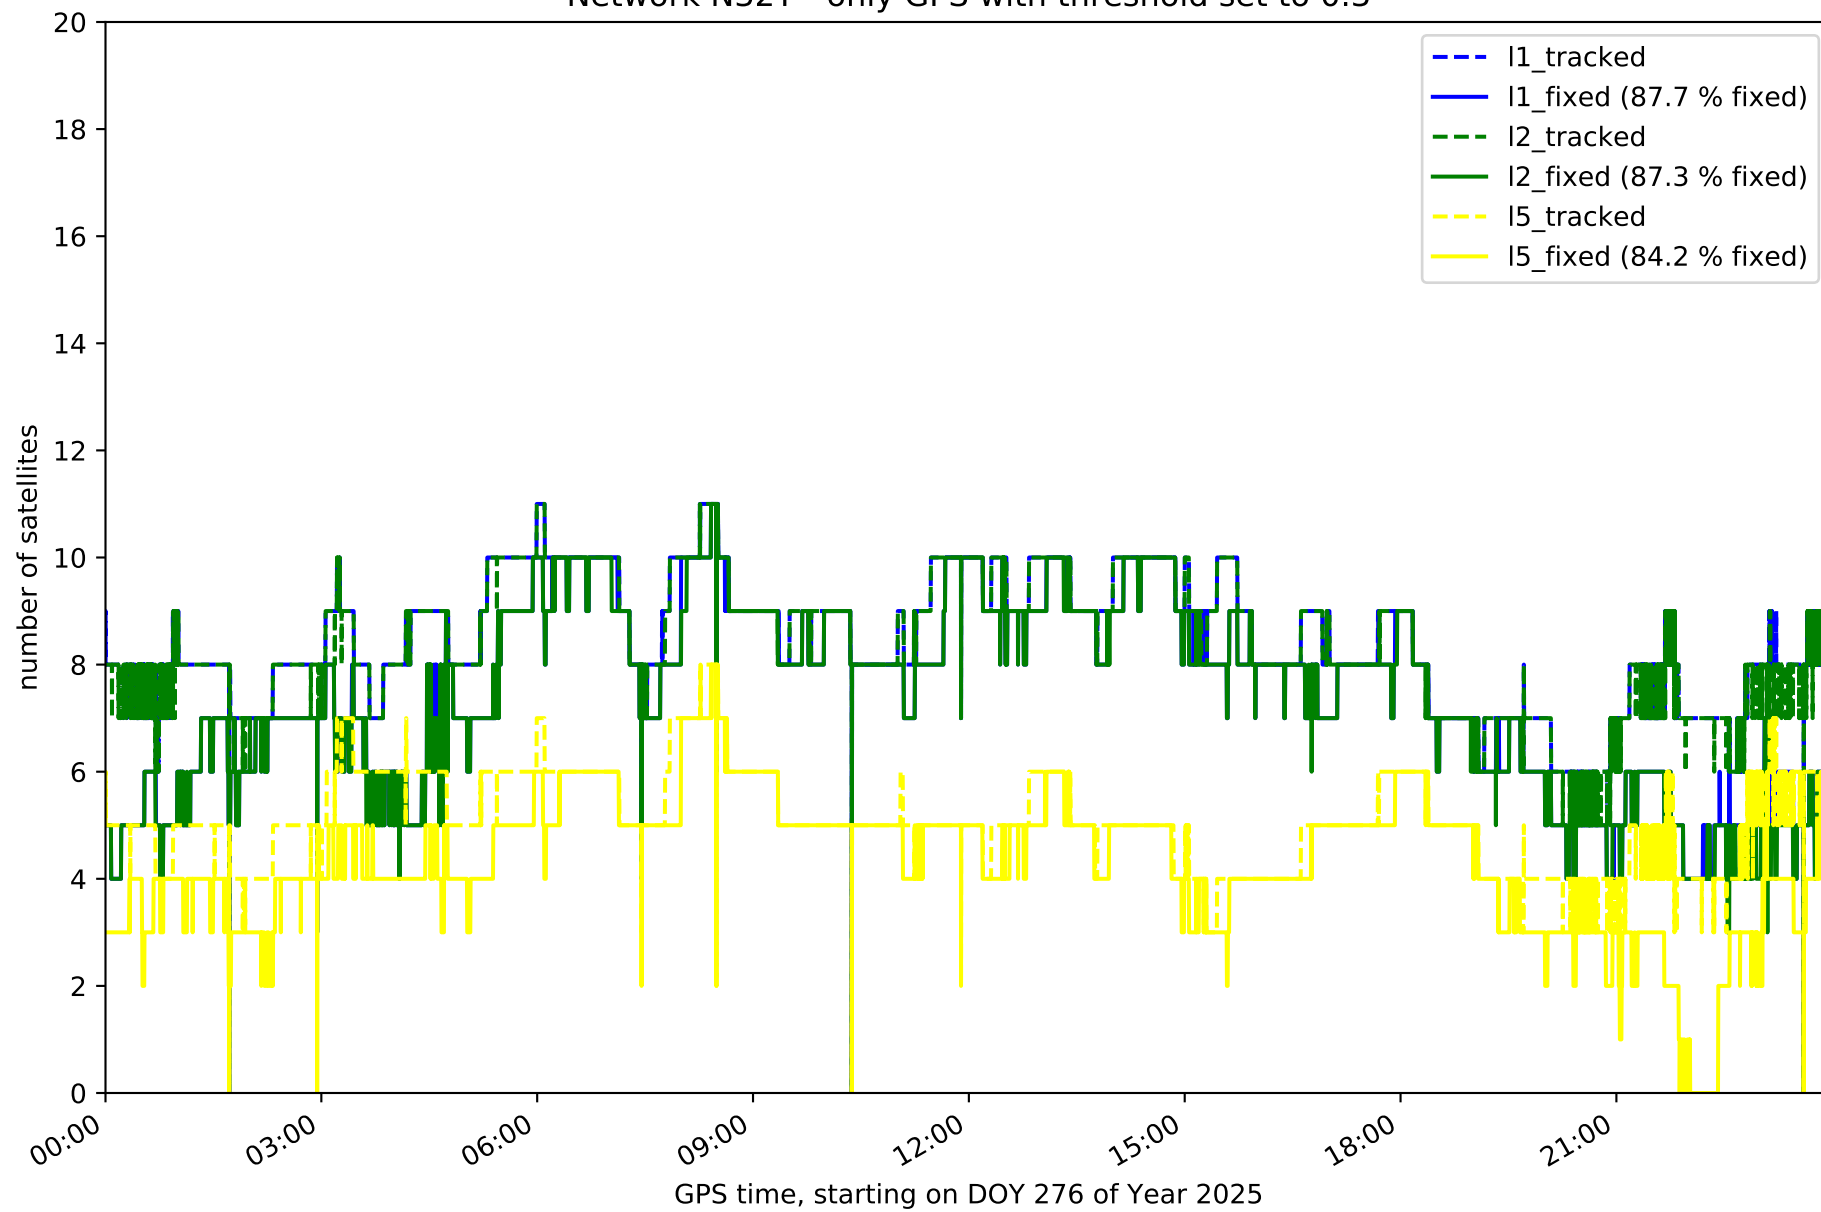


Network N32T - only GLONASS with threshold set to 0.3

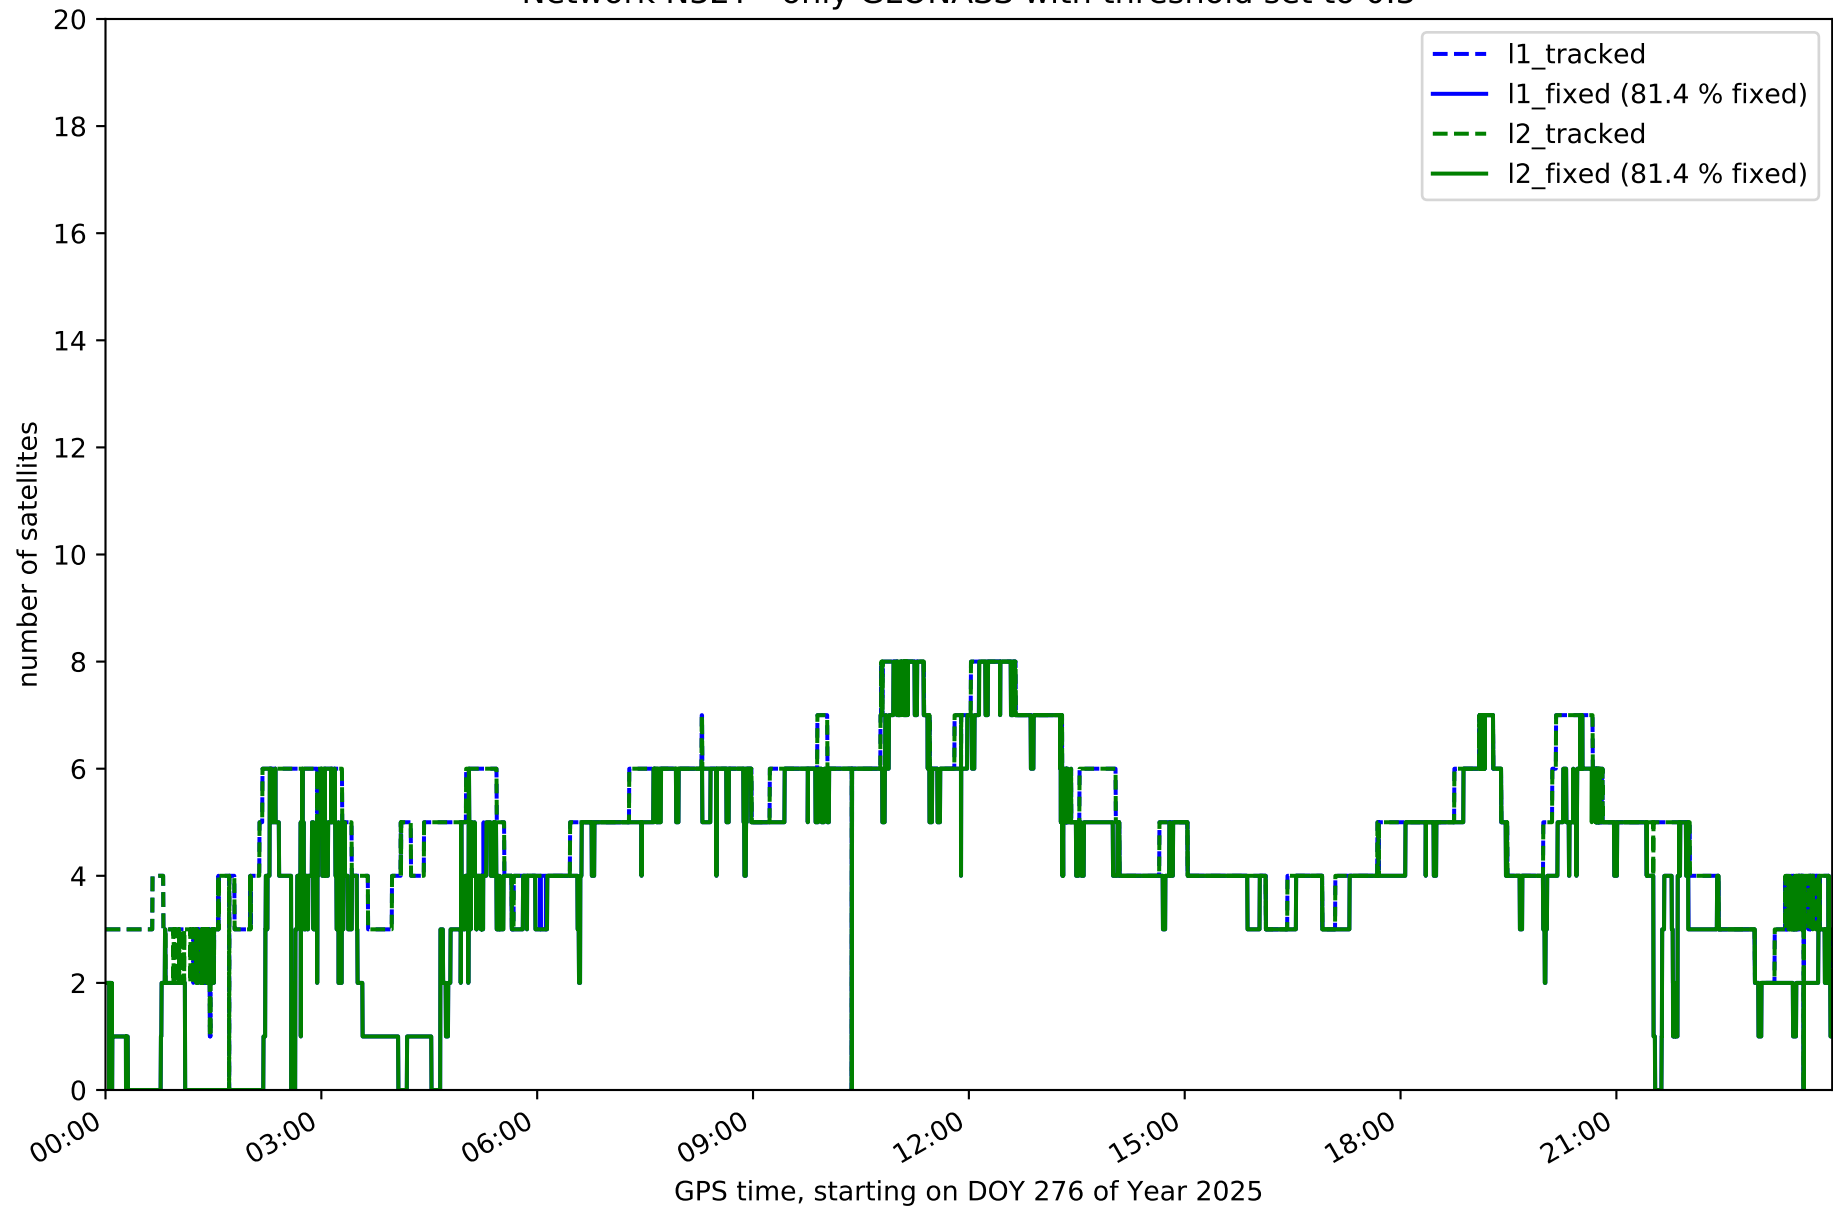


Network N32T - only BDS with threshold set to 0.3

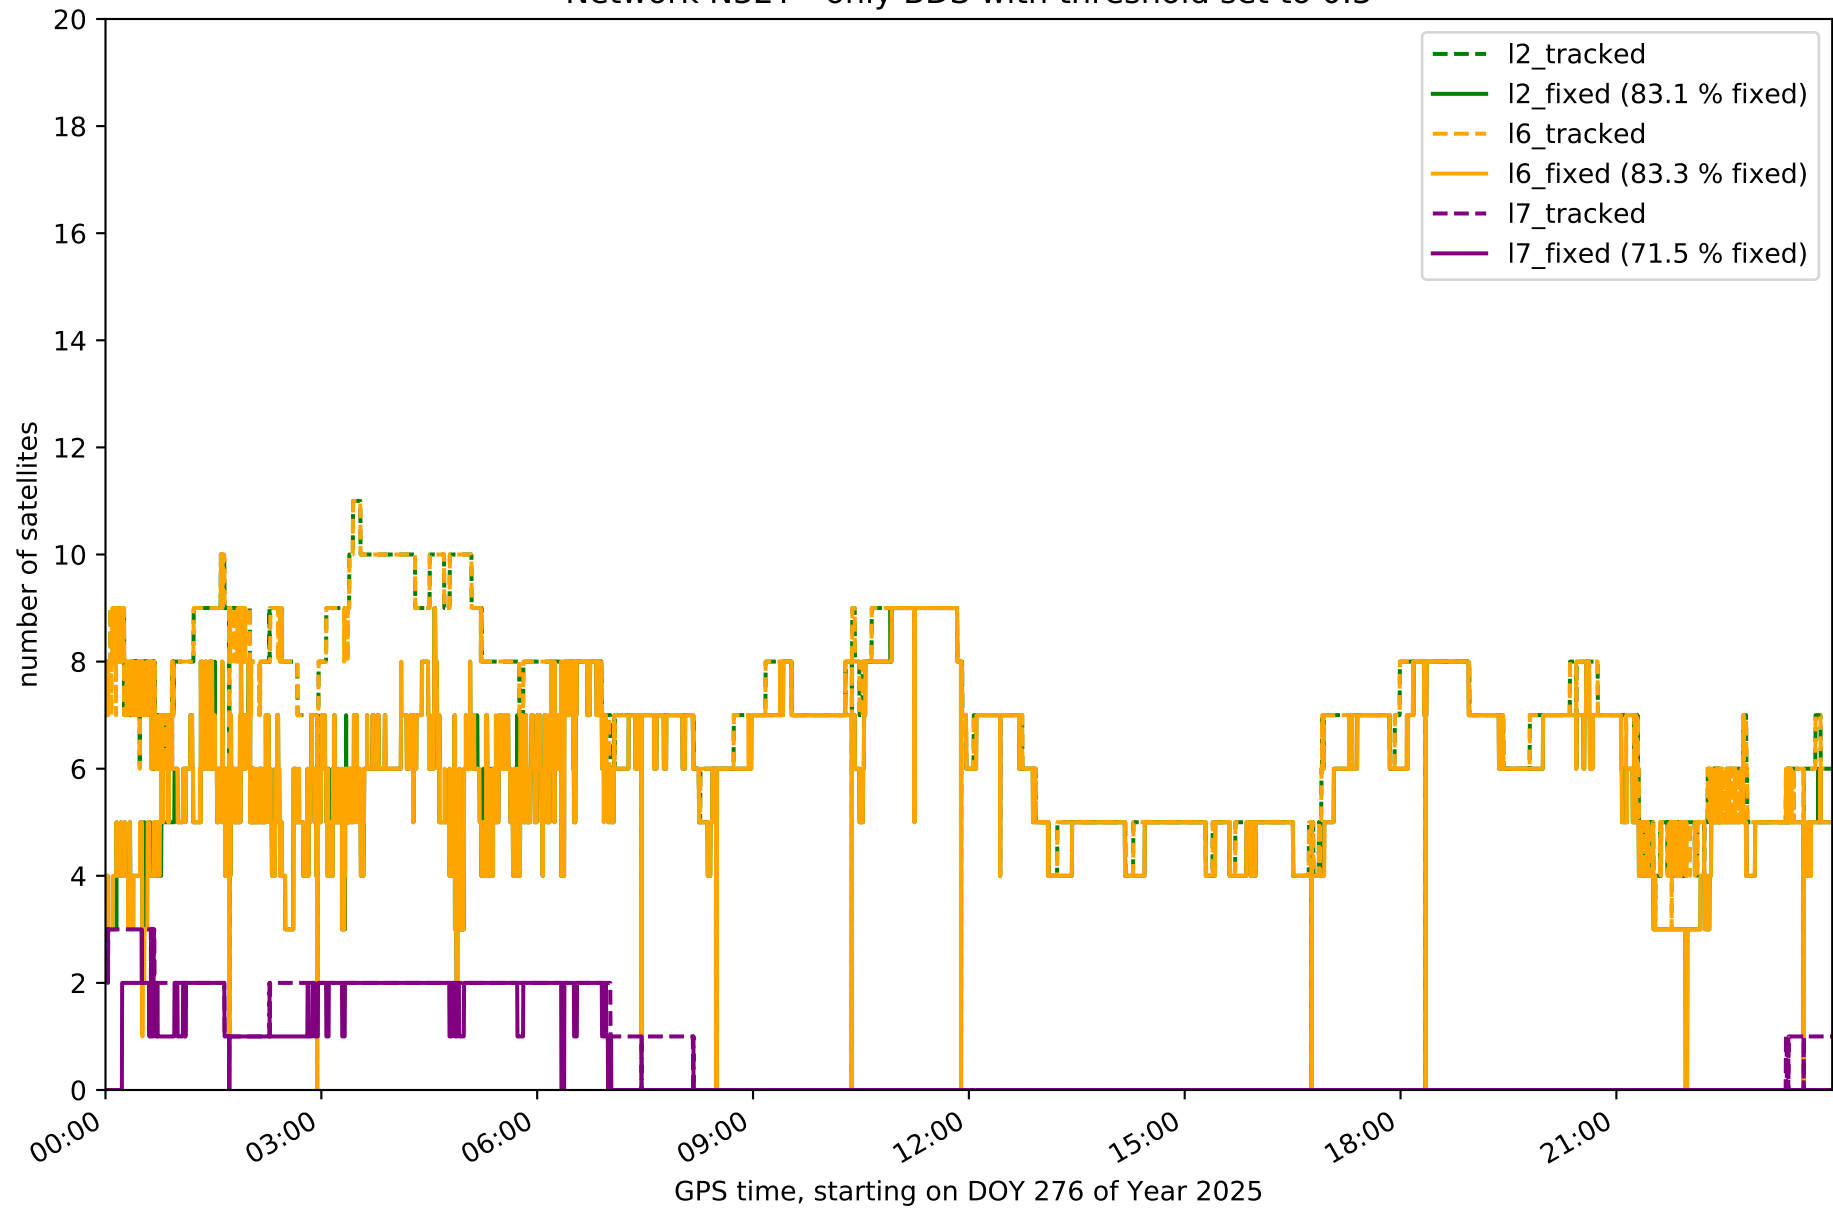


Network N32T - only Galileo with threshold set to 0.3

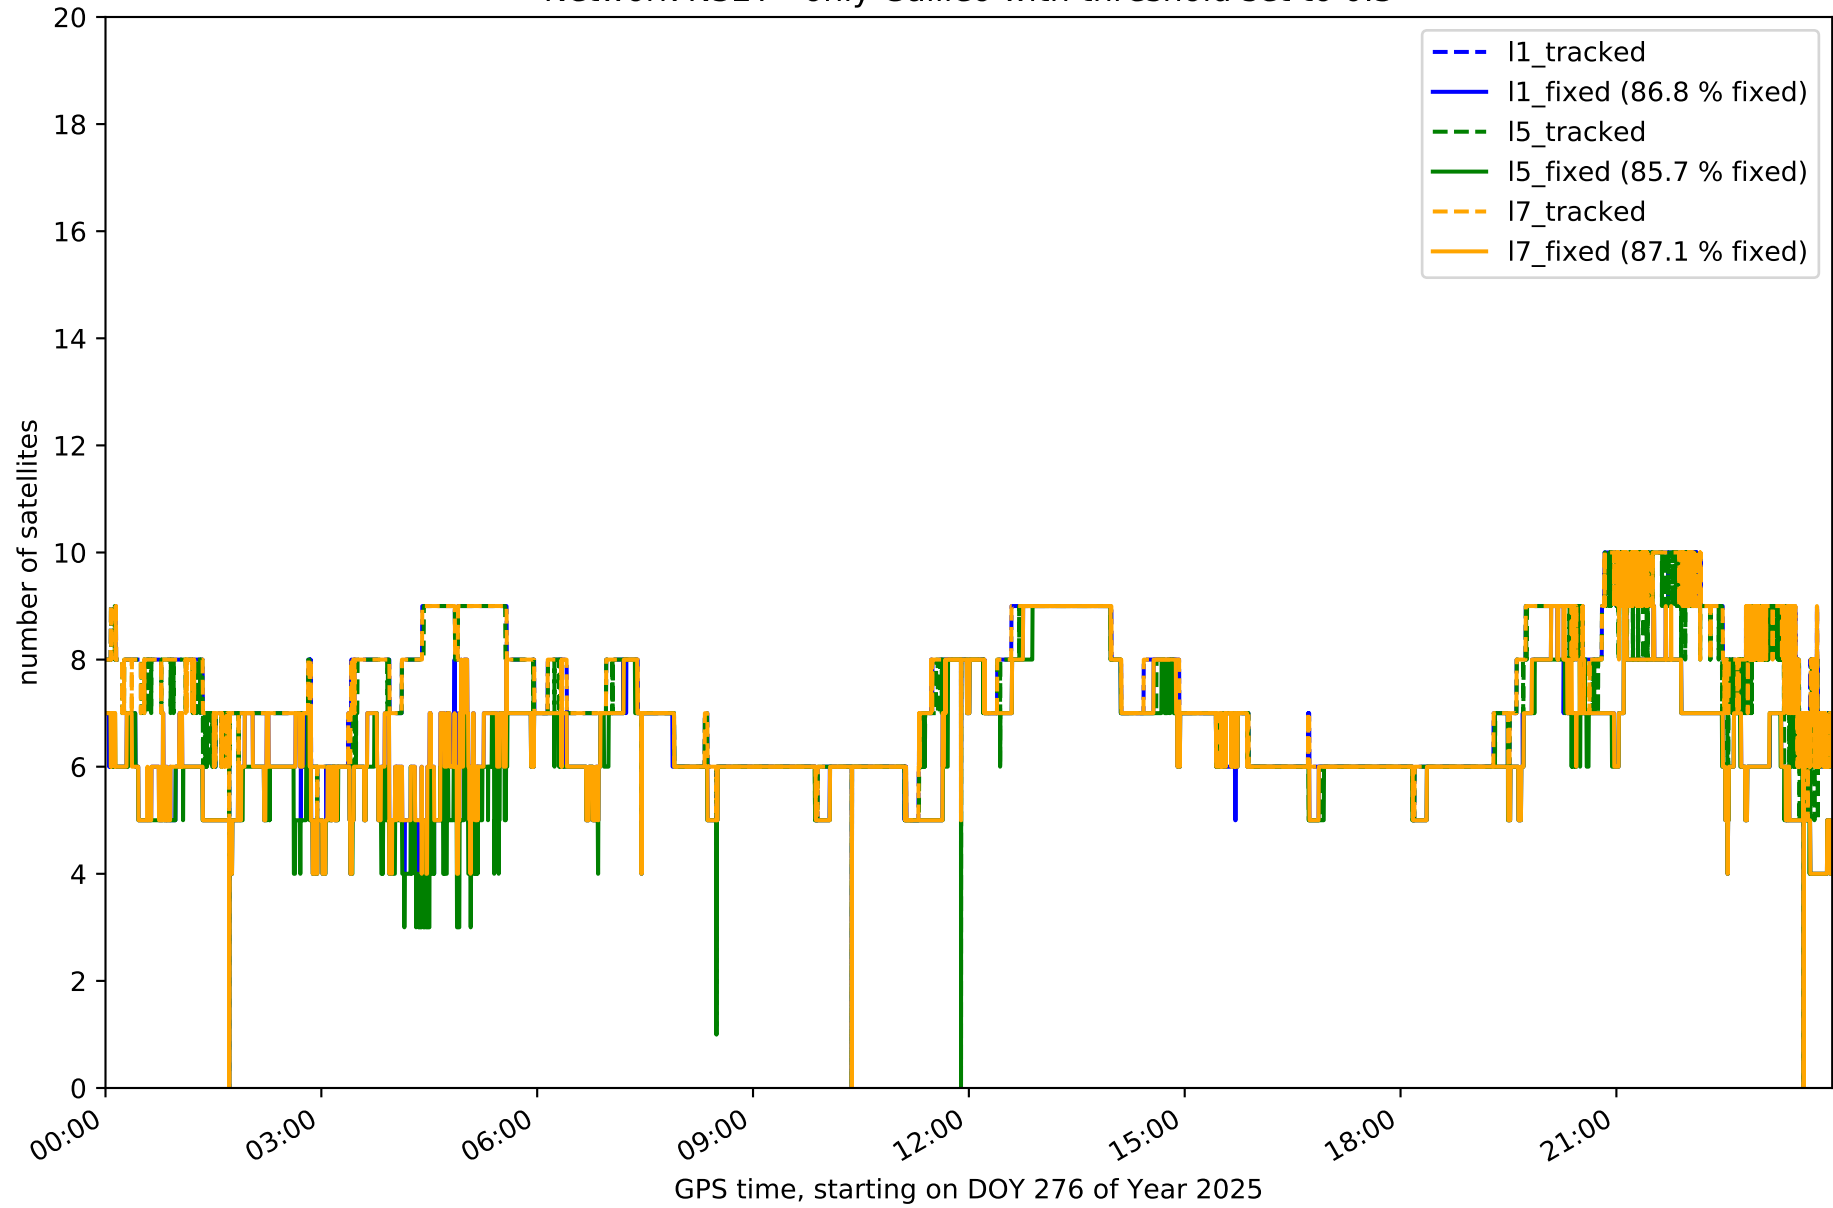


Station EH01 in network N32T

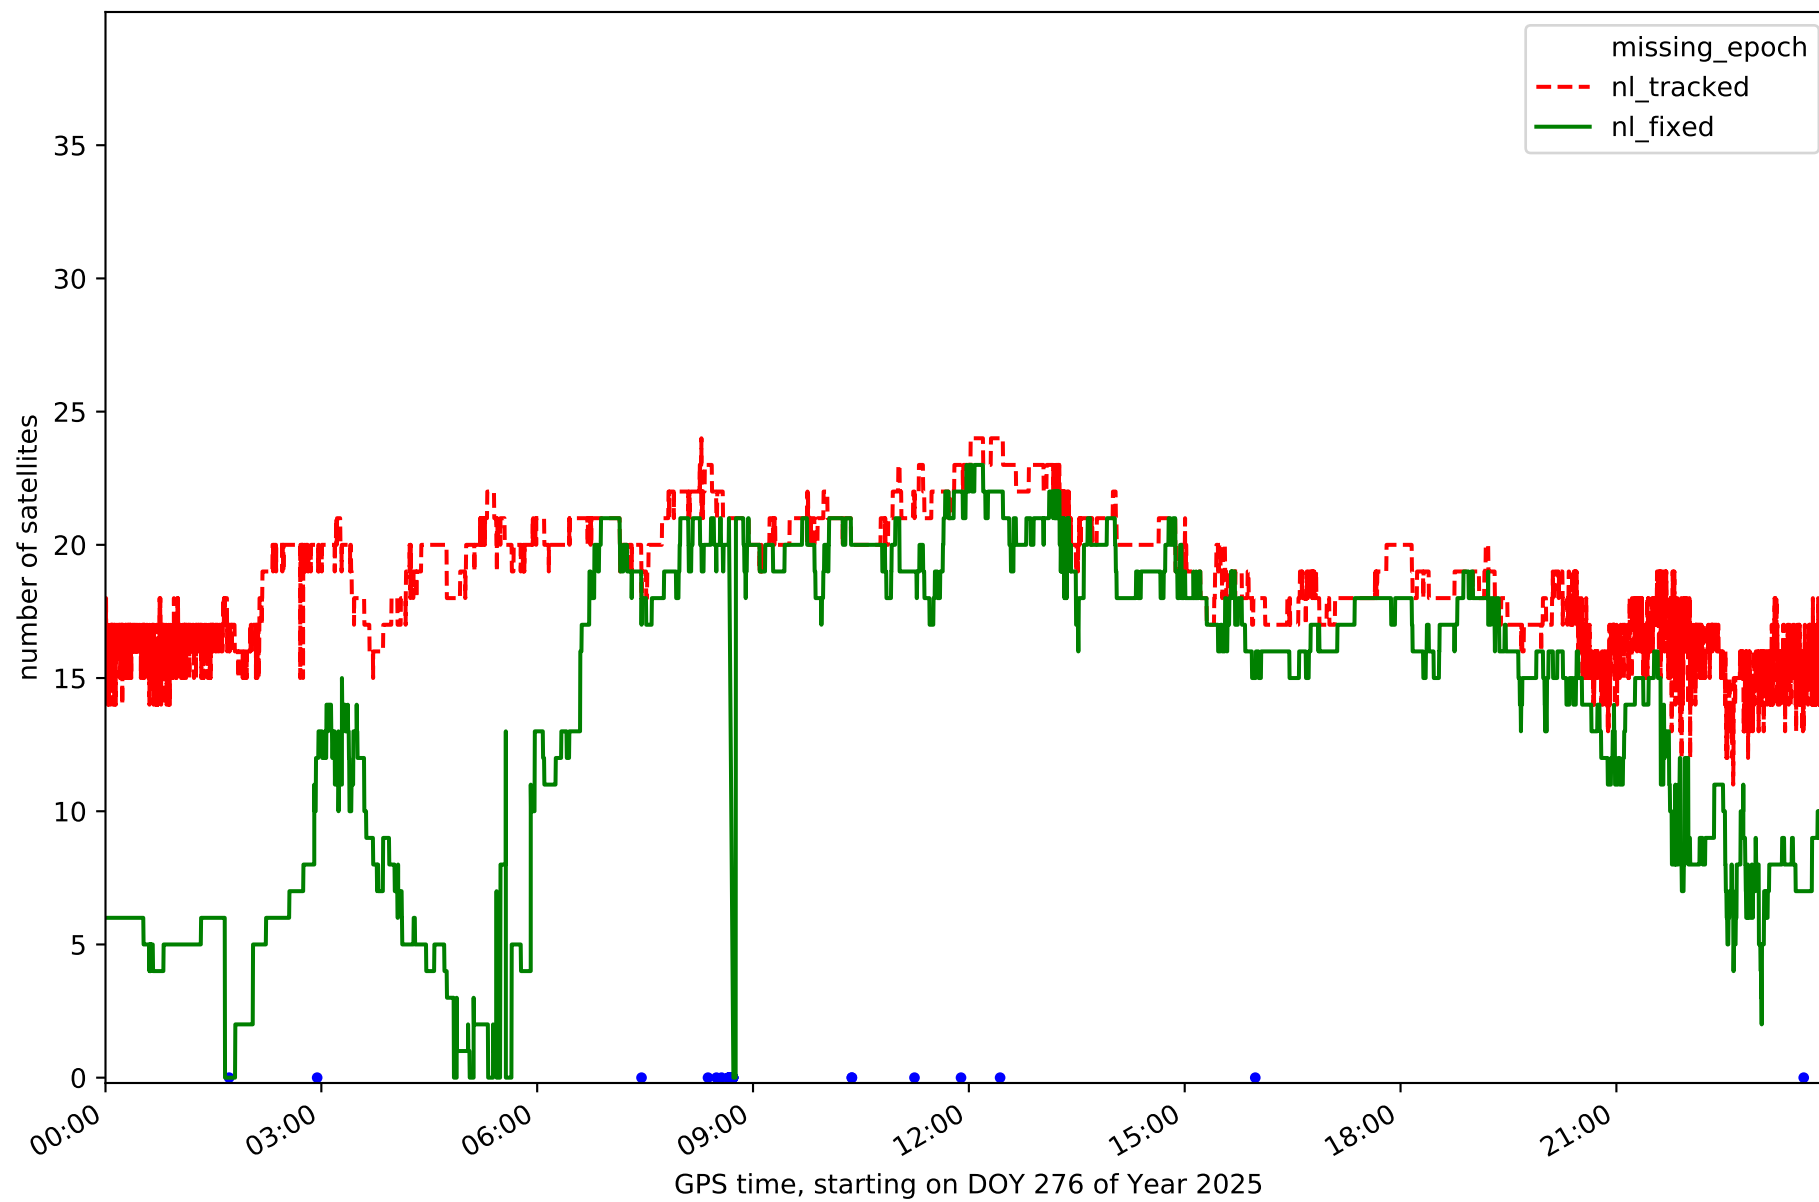


Station GOM1 in network N32T

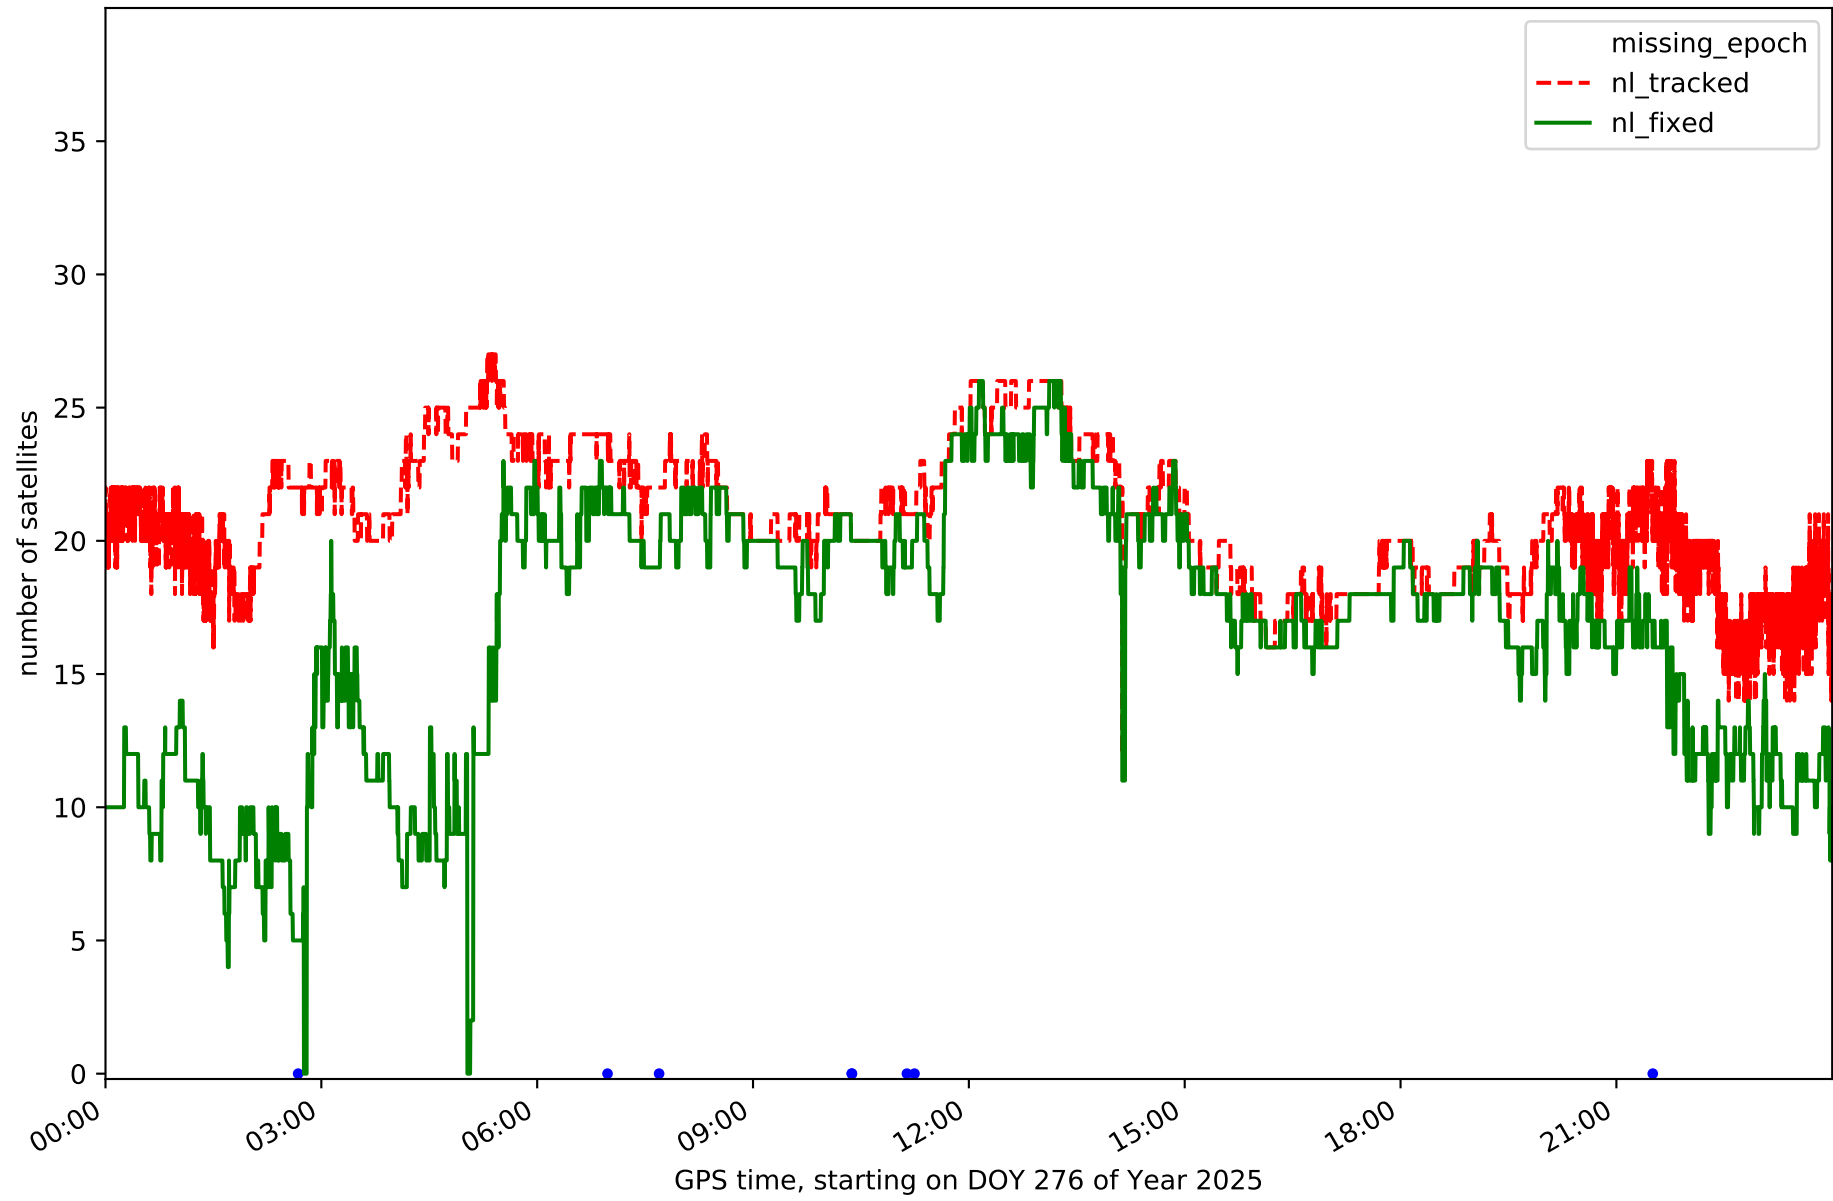


Station GOME in network N32T

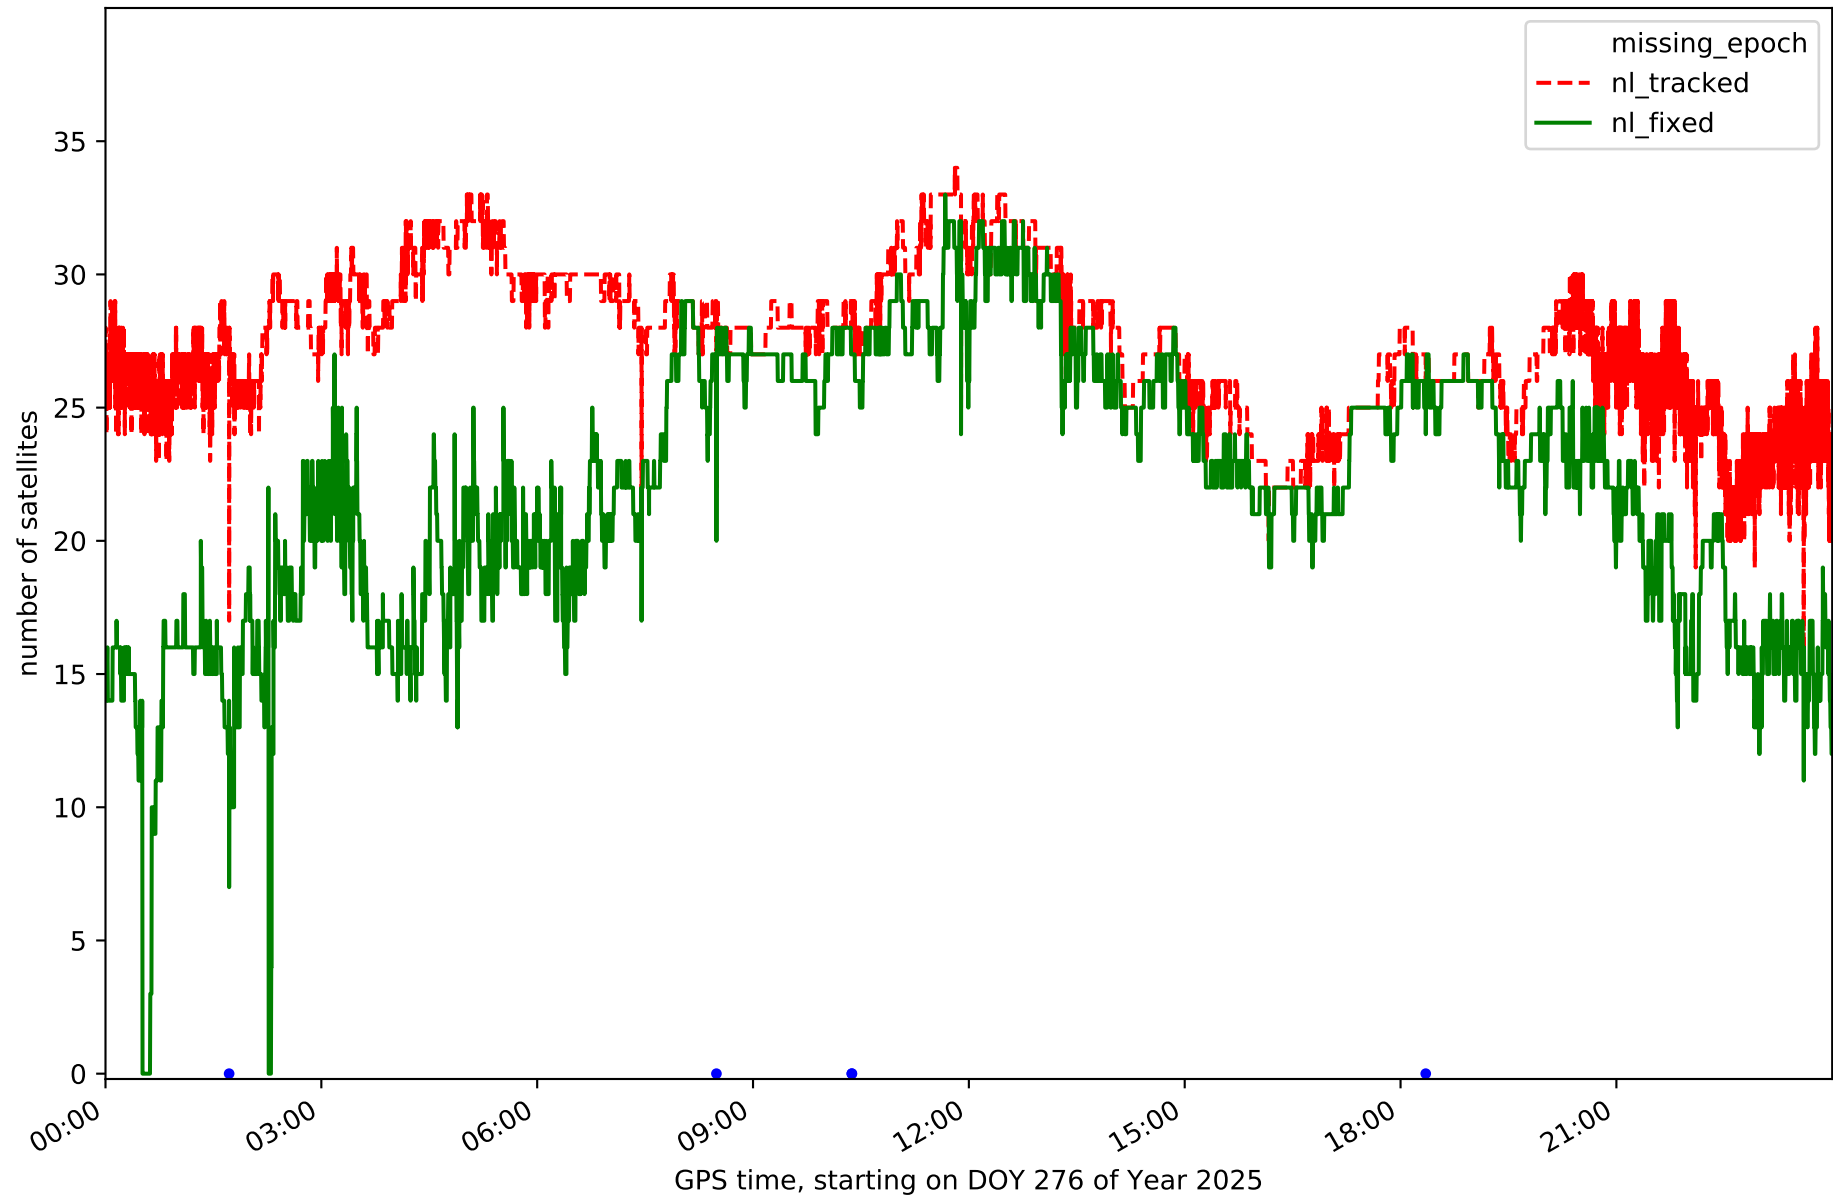


Station IZAN in network N32T

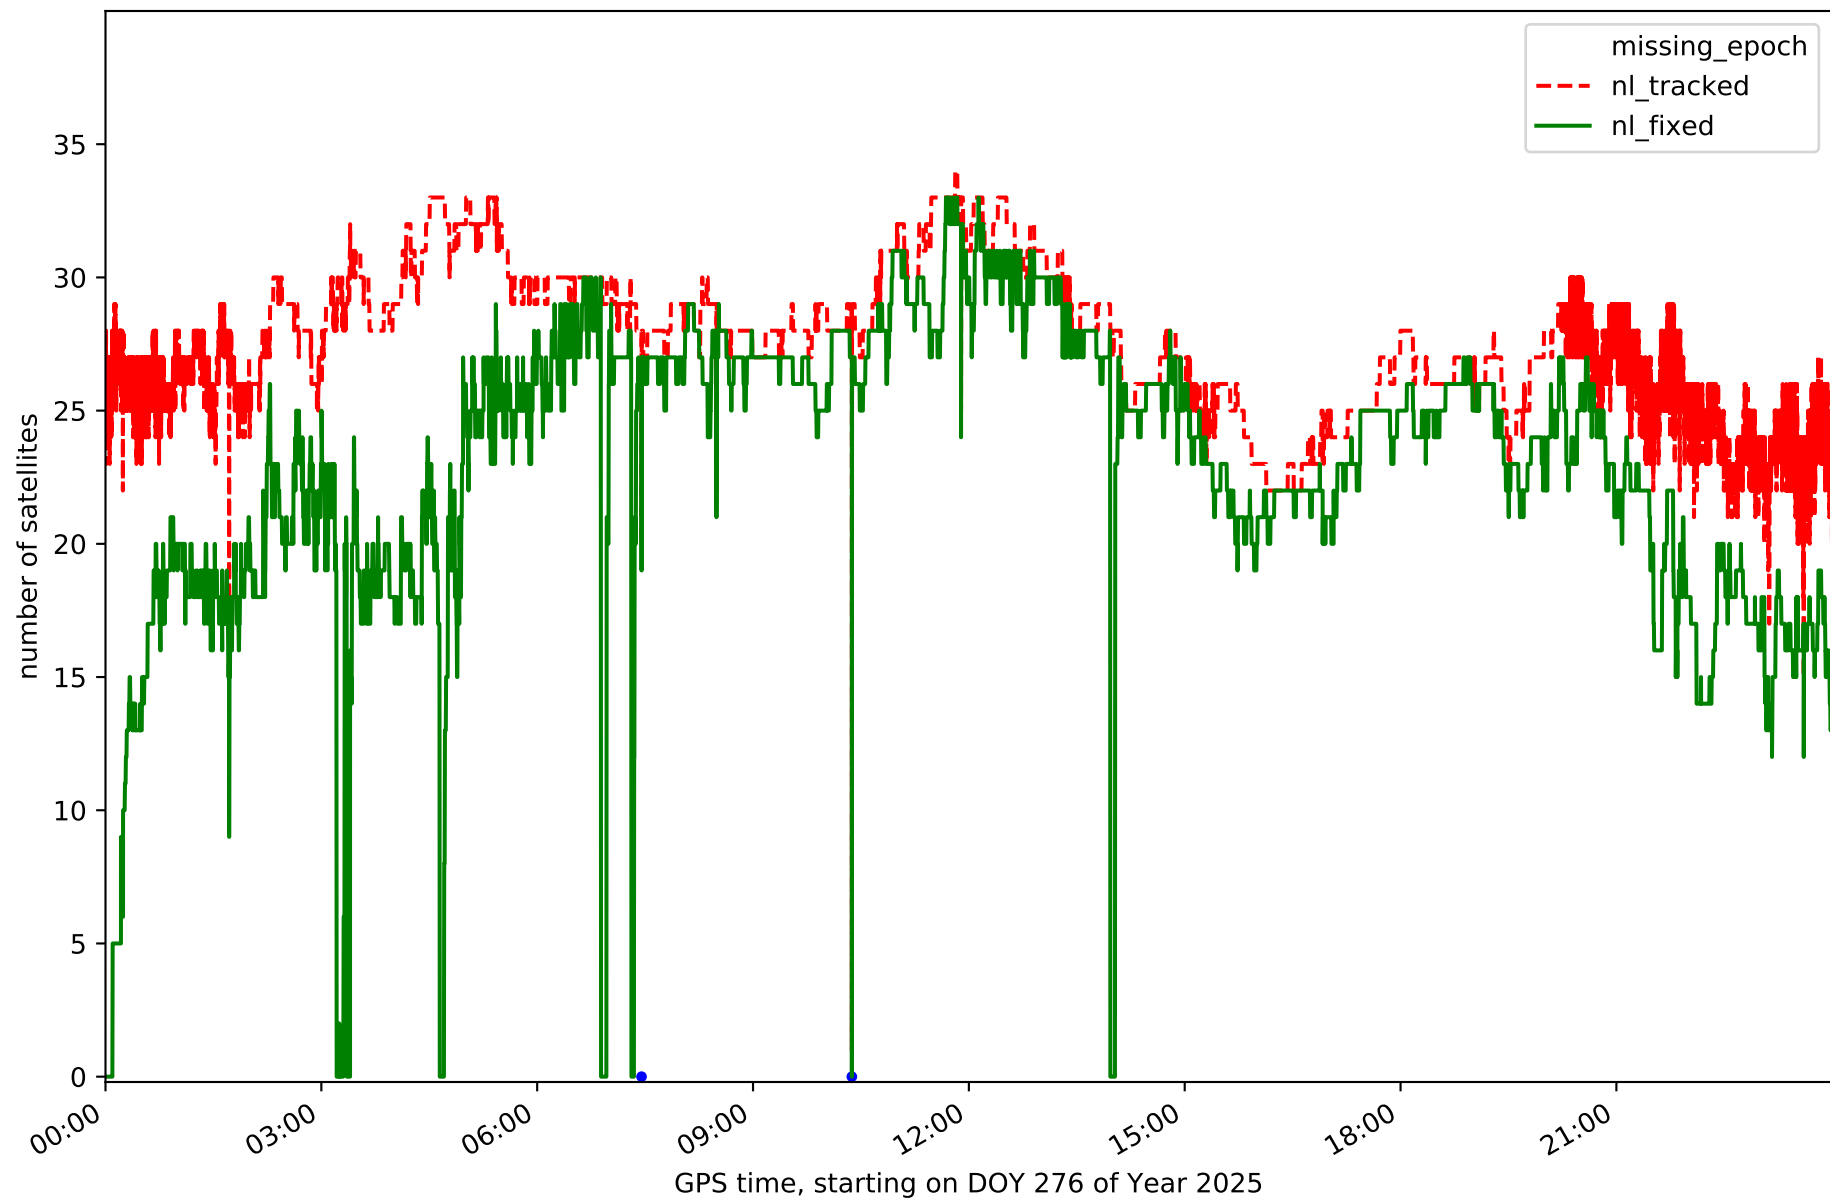


Station LP01 in network N32T

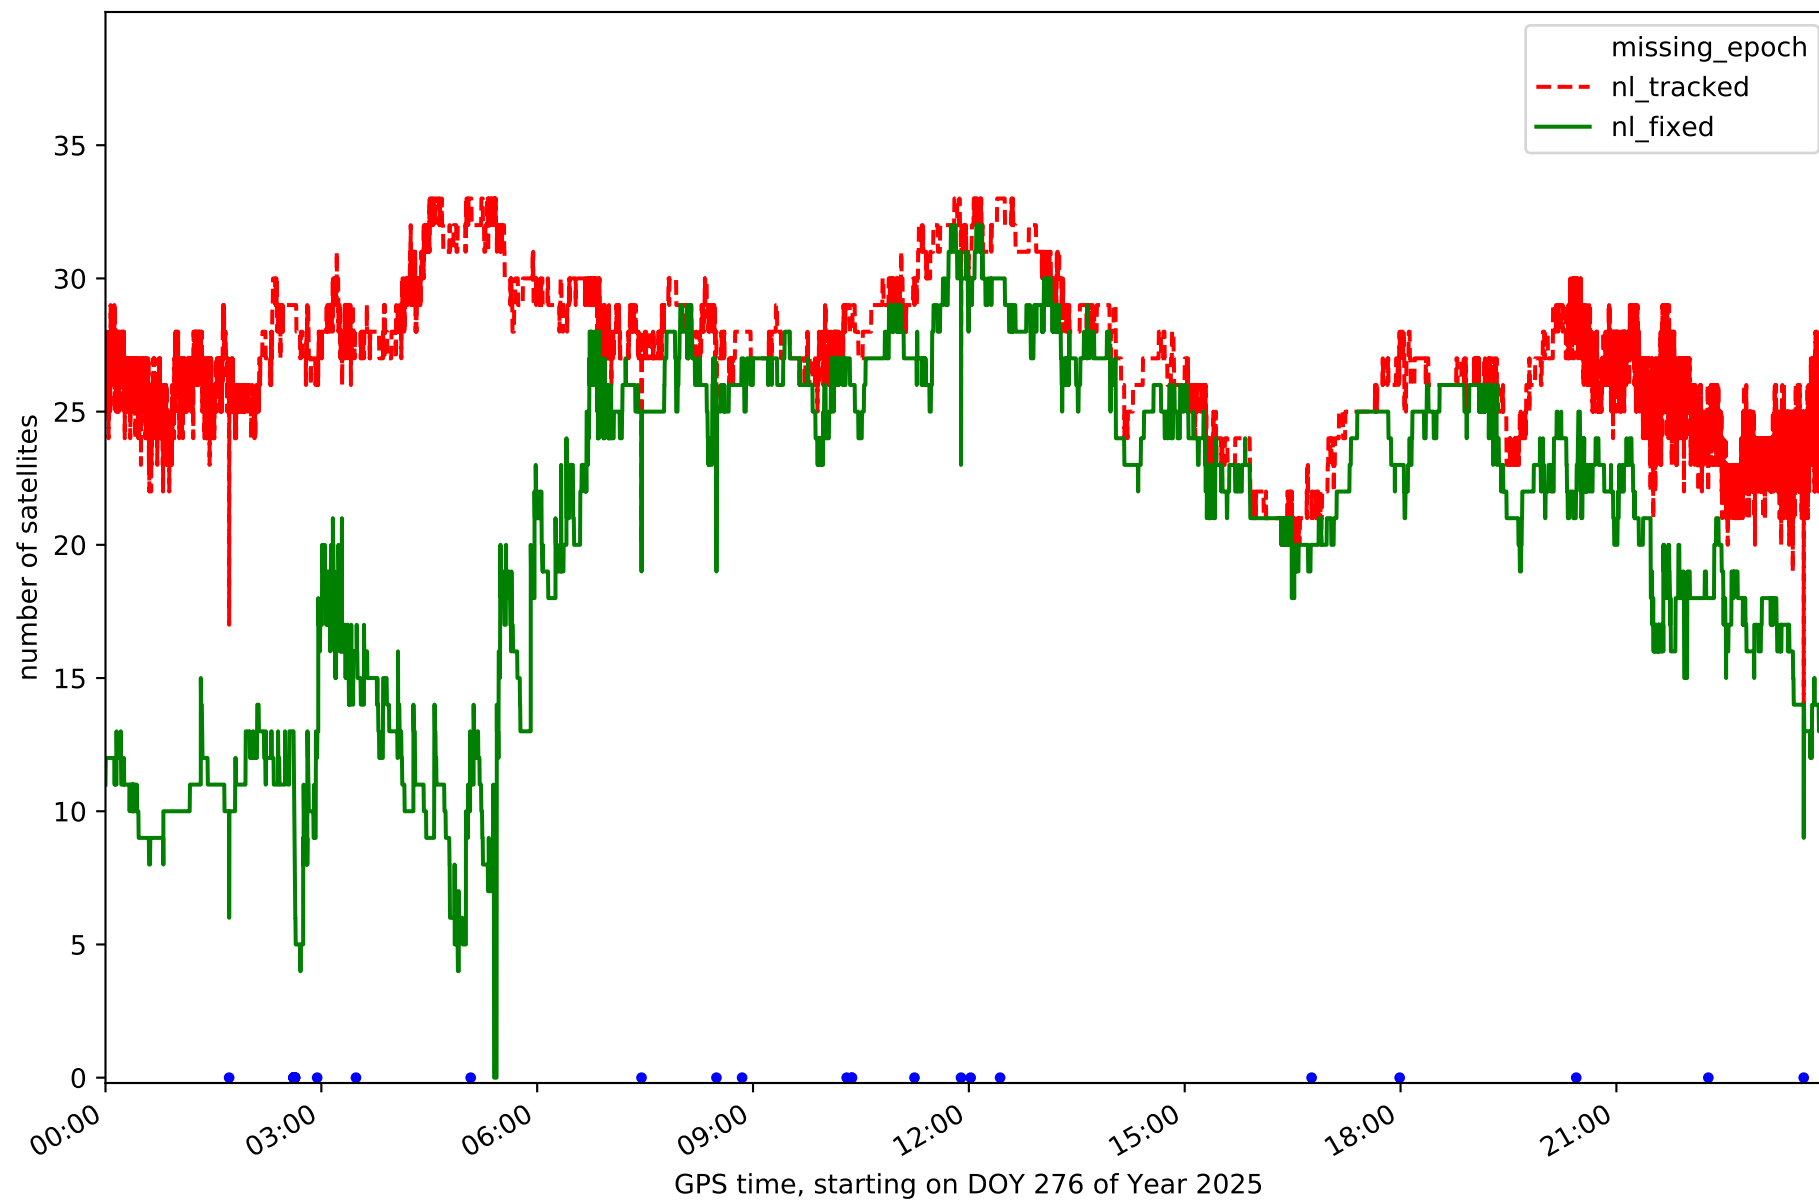


Station LP03 in network N32T

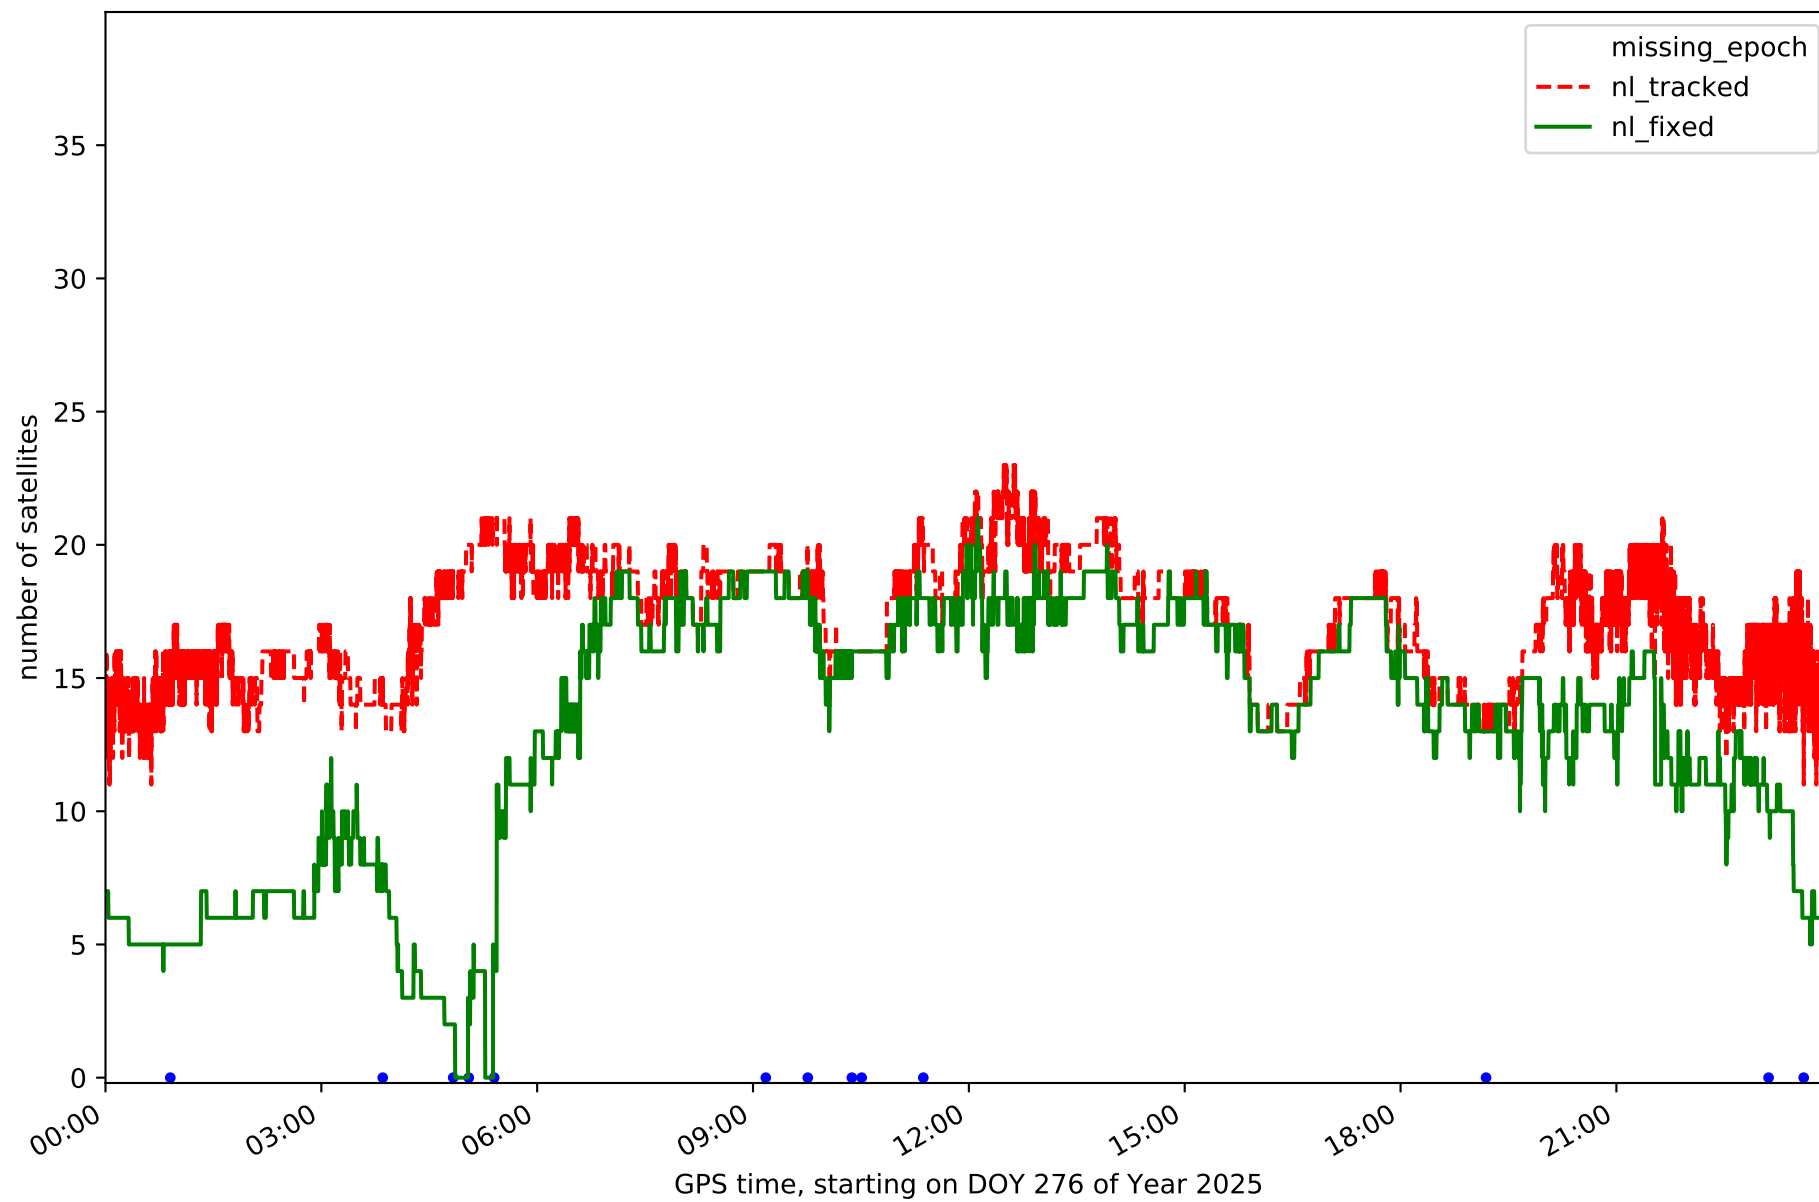


Station LPAL in network N32T

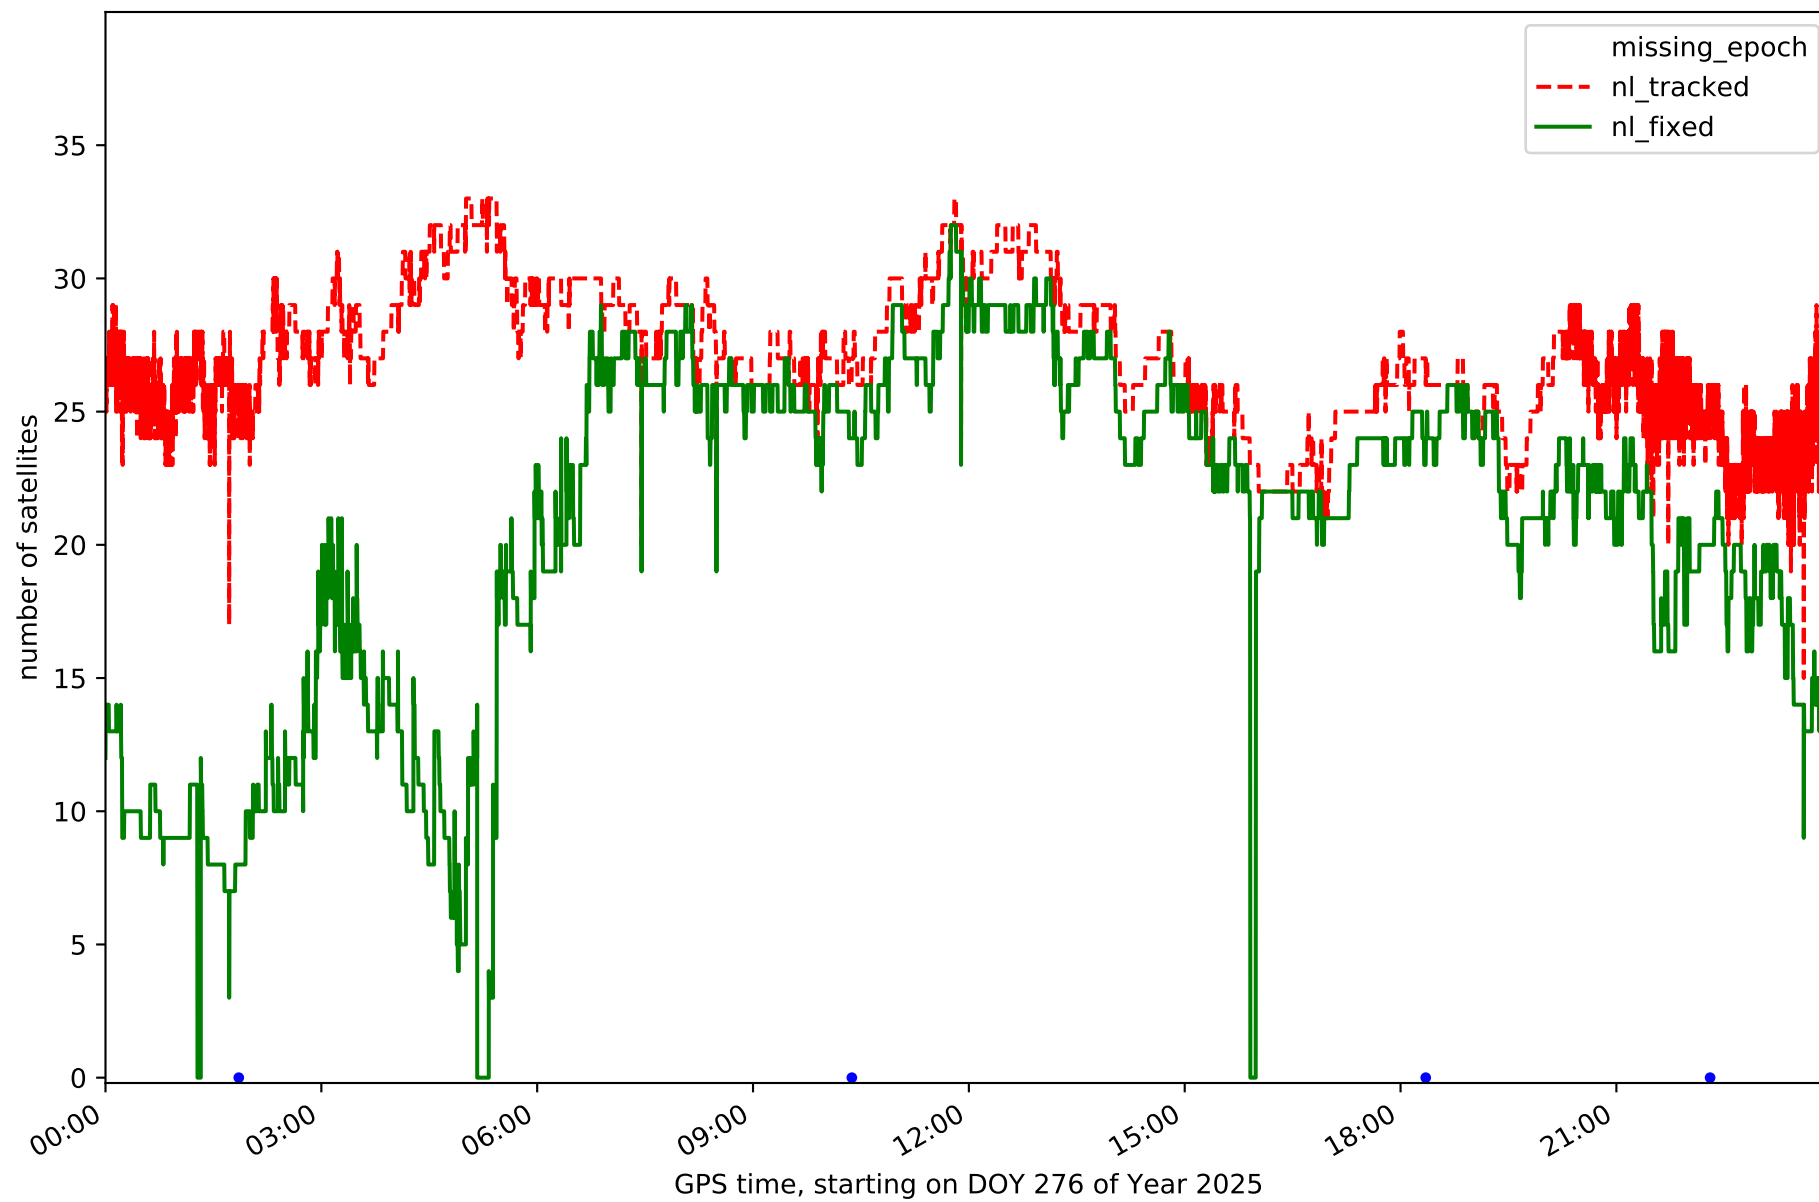


Station LRES in network N32T

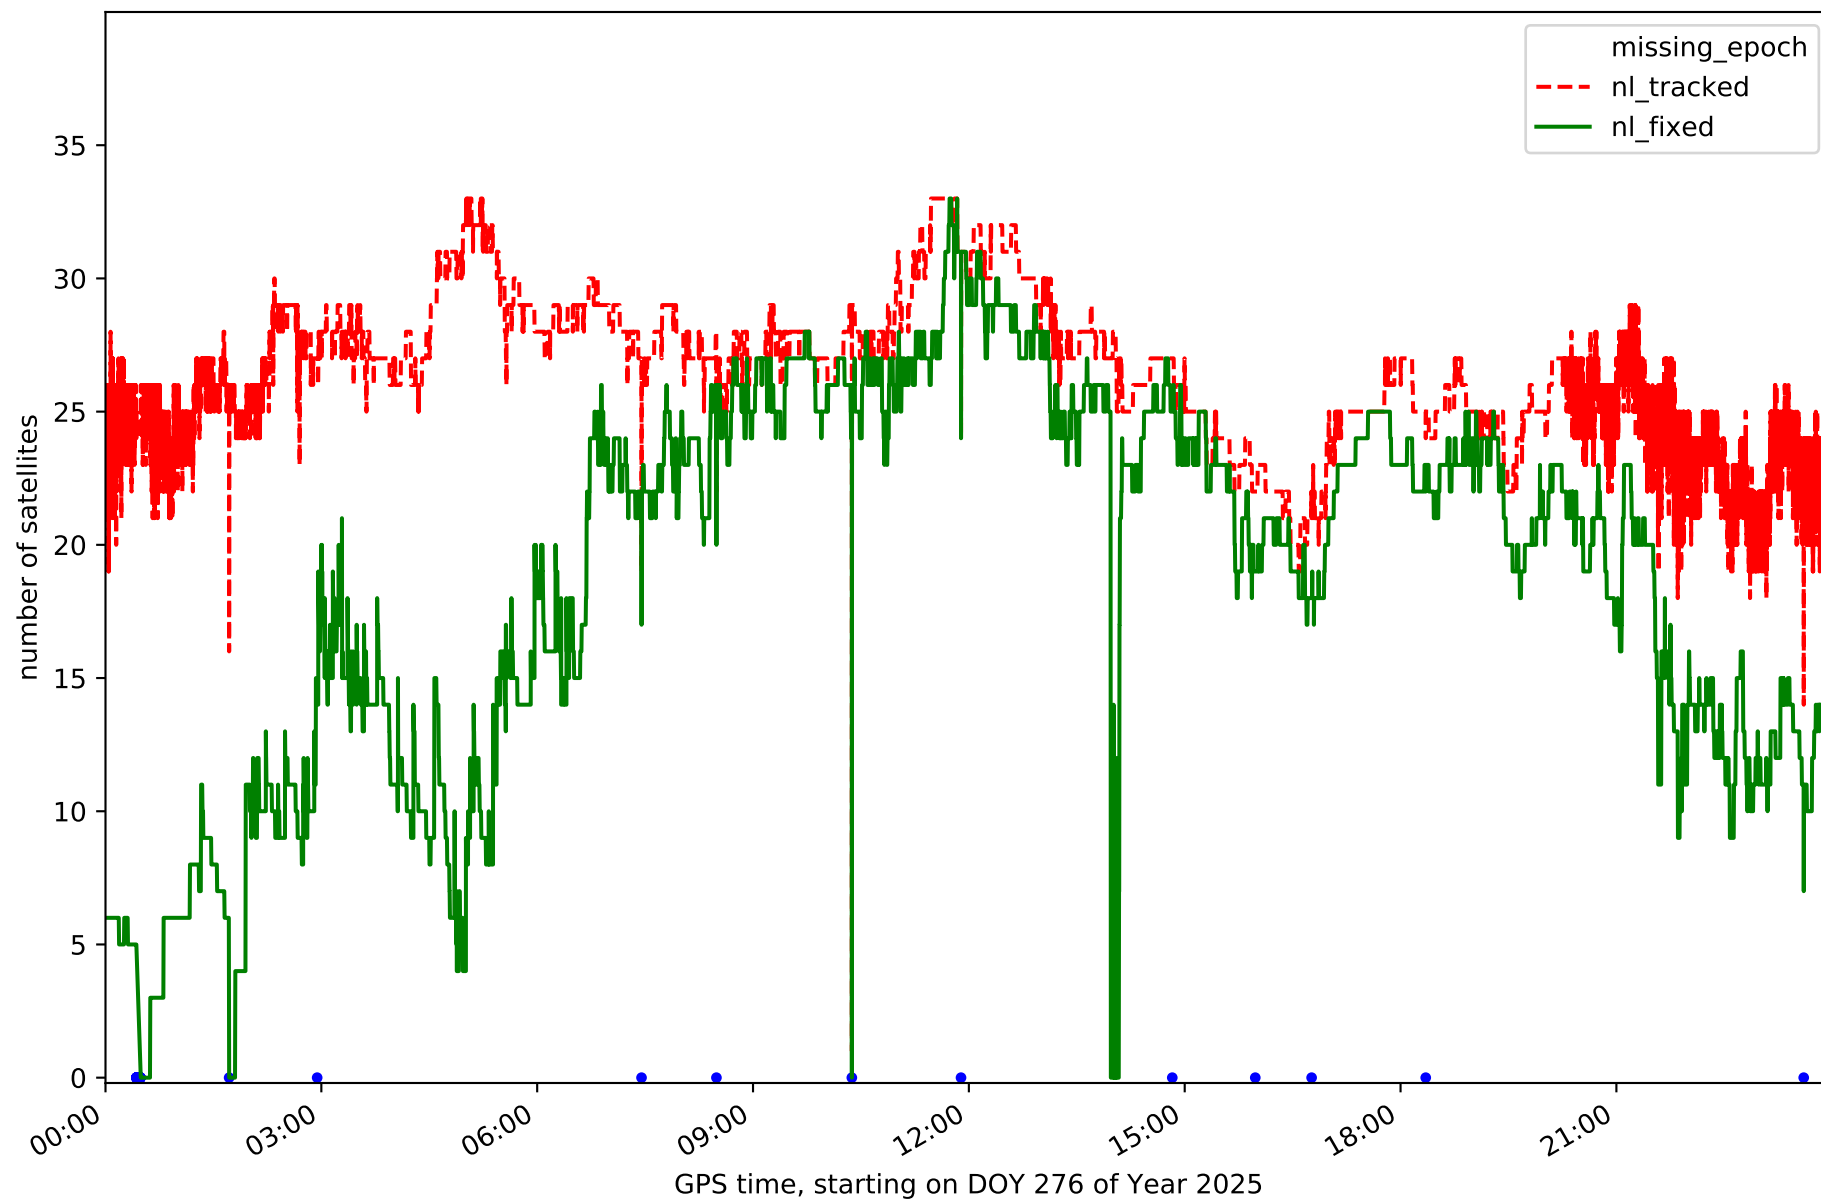


Station TN01 in network N32T

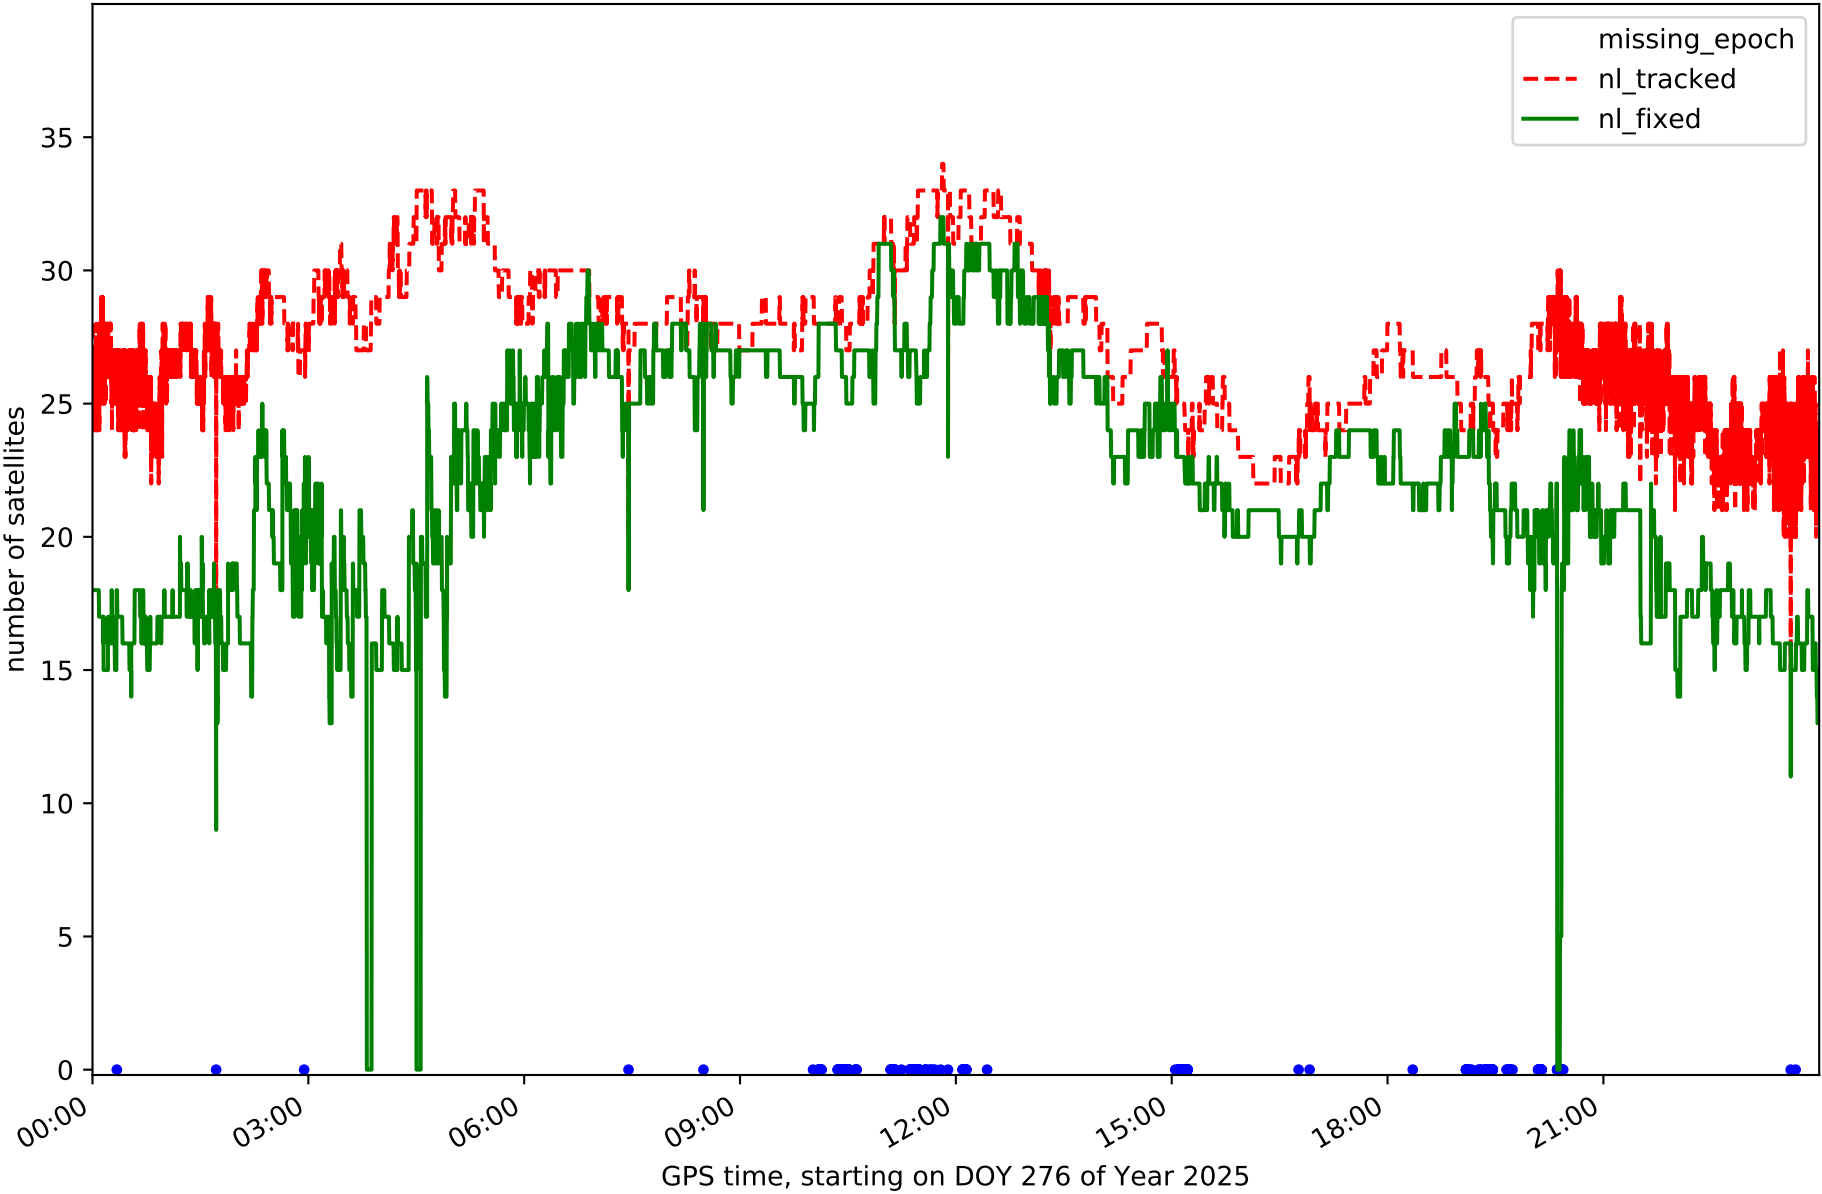


Station TN02 in network N32T

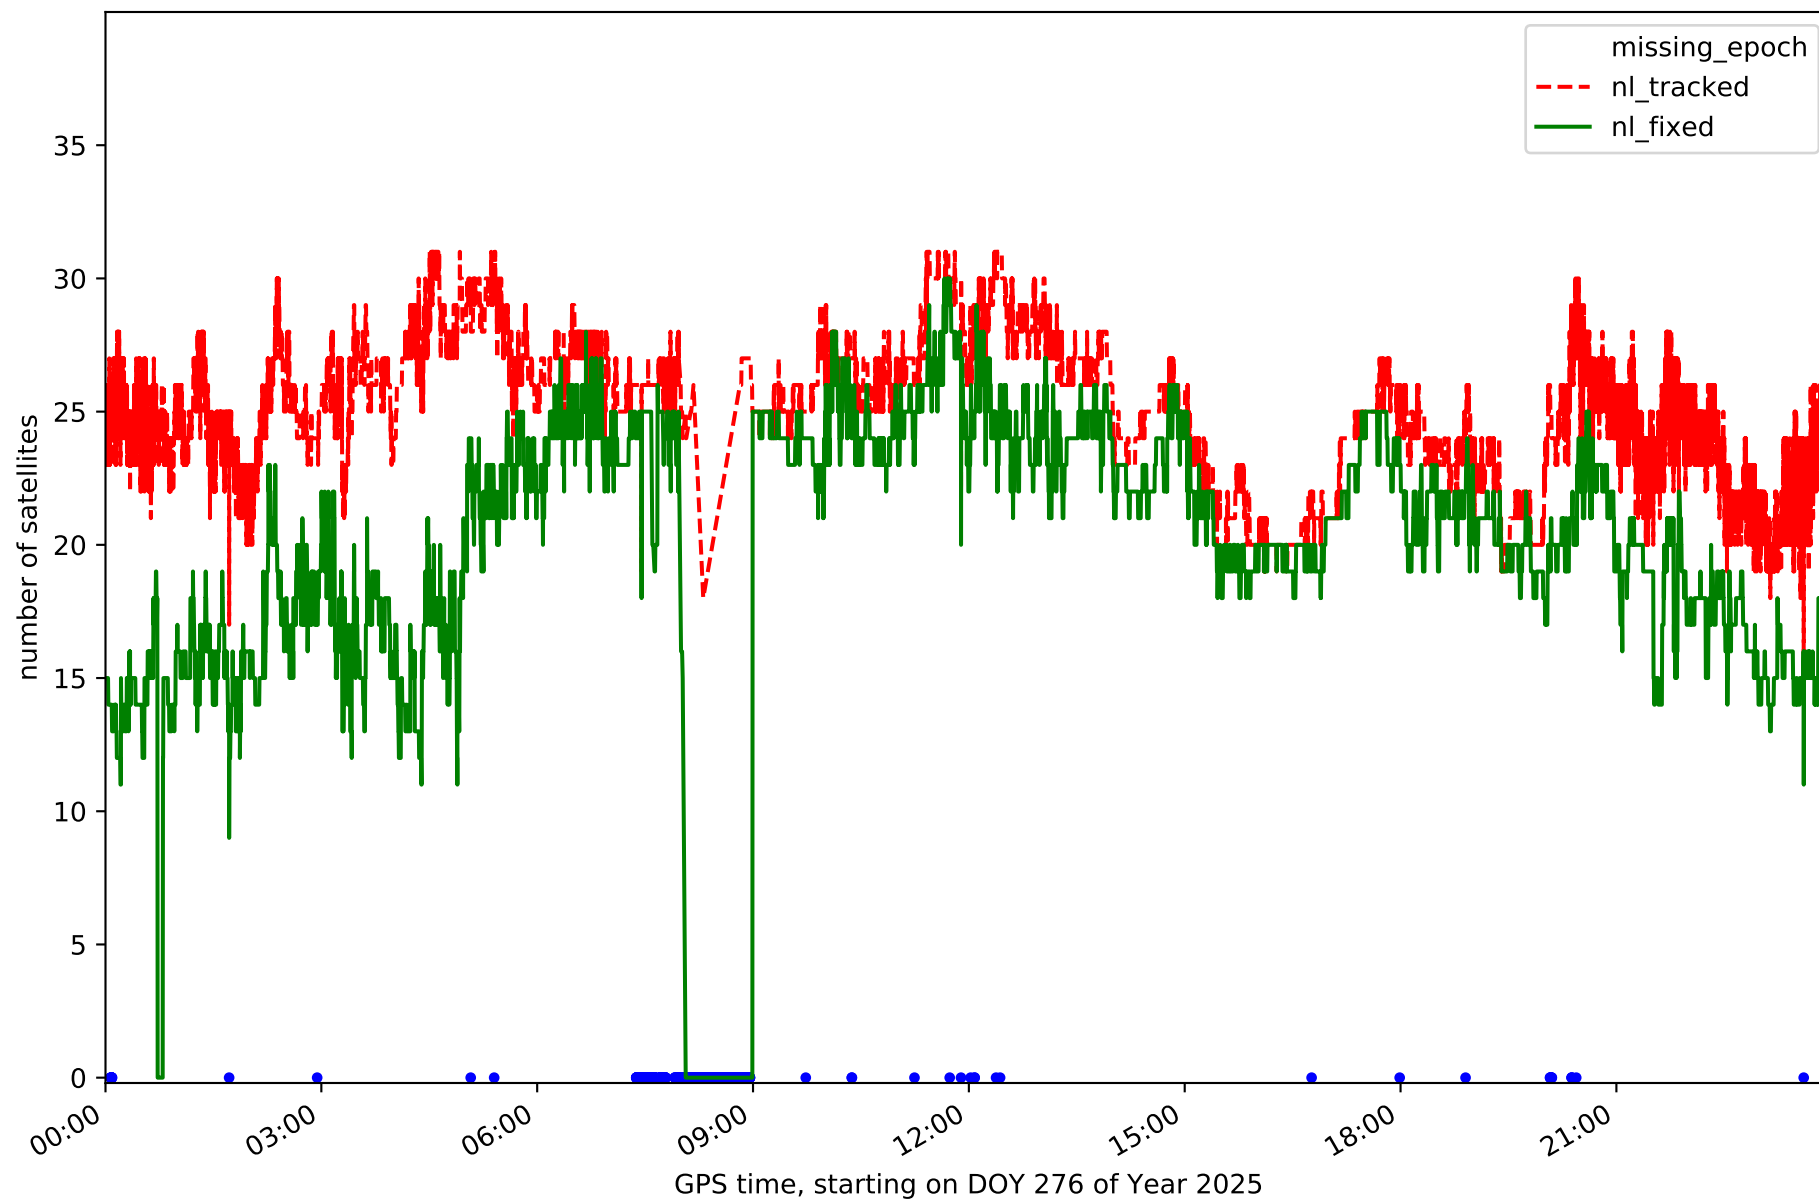


Station TN03 in network N32T

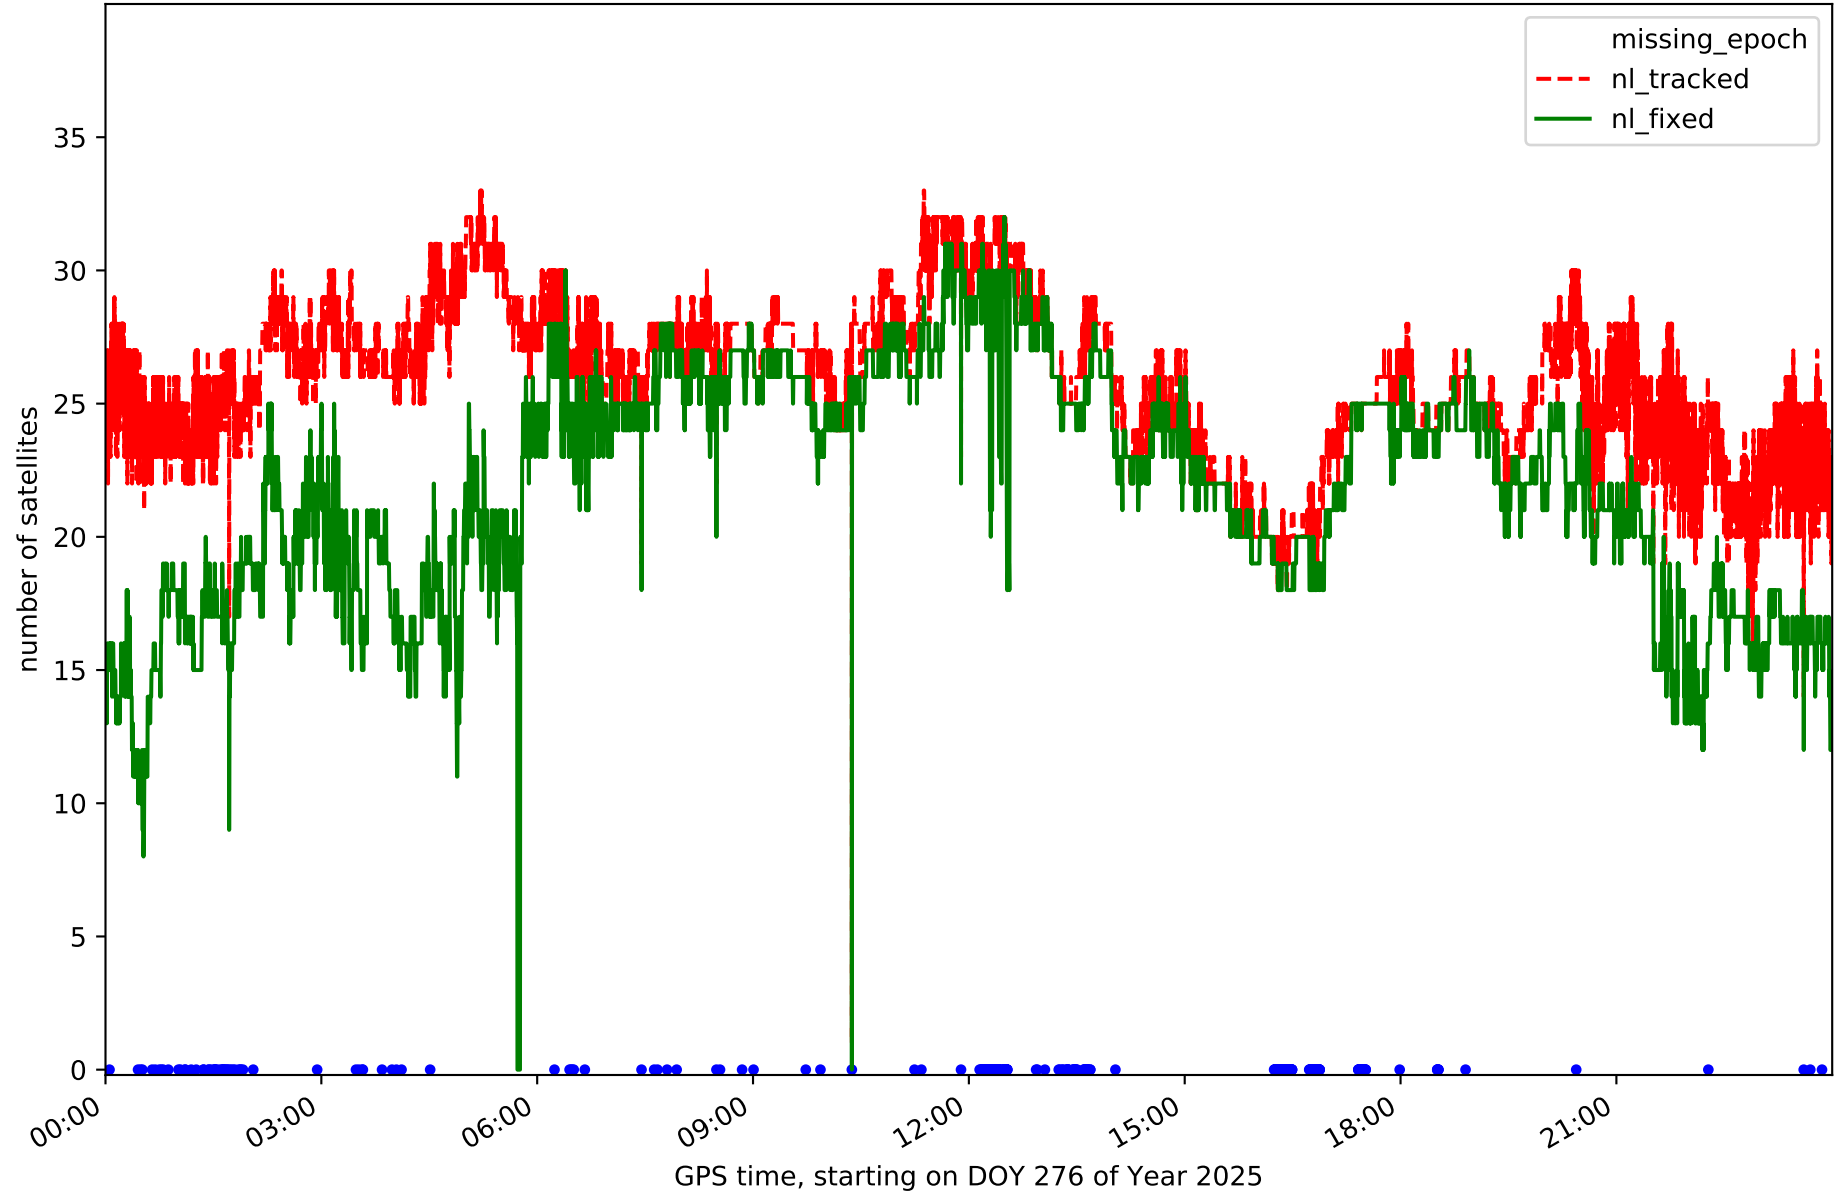


Station TN04 in network N32T

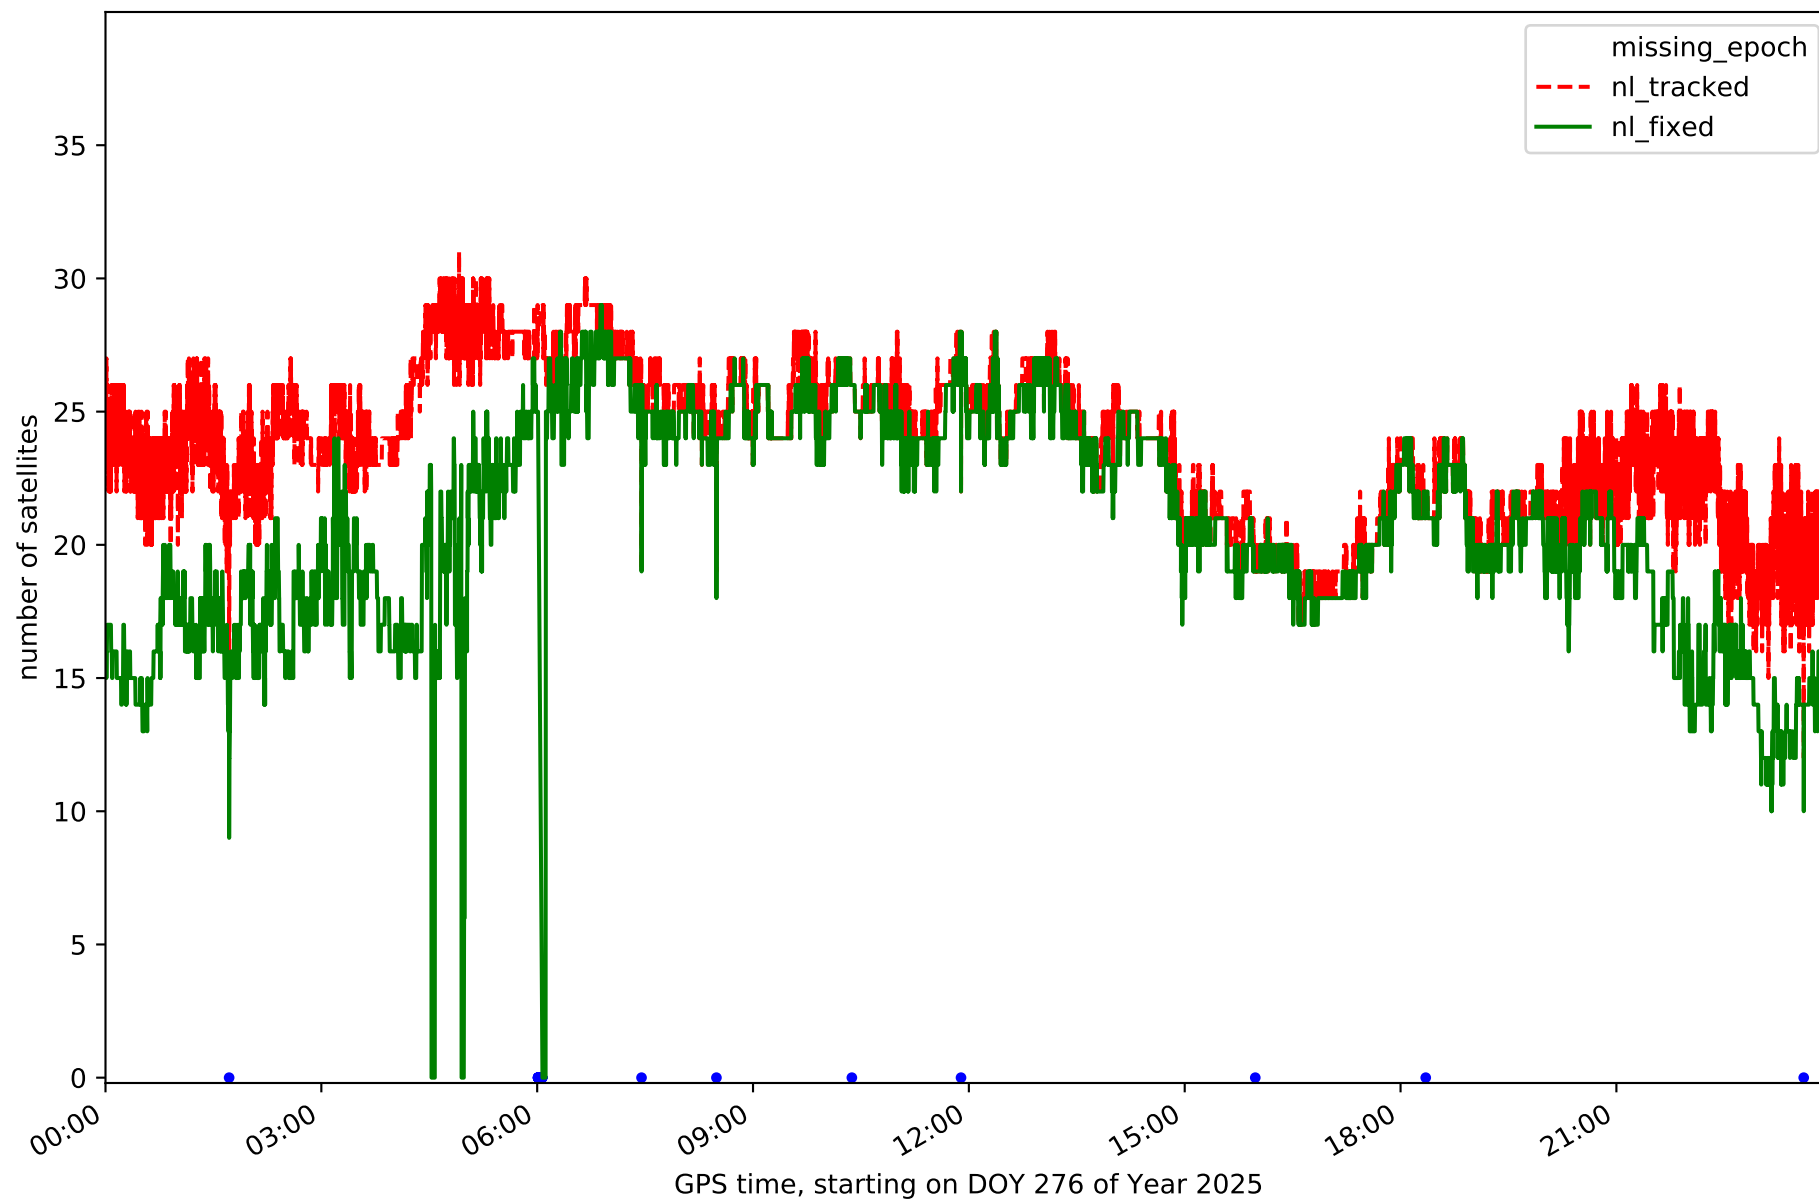


Station TN06 in network N32T

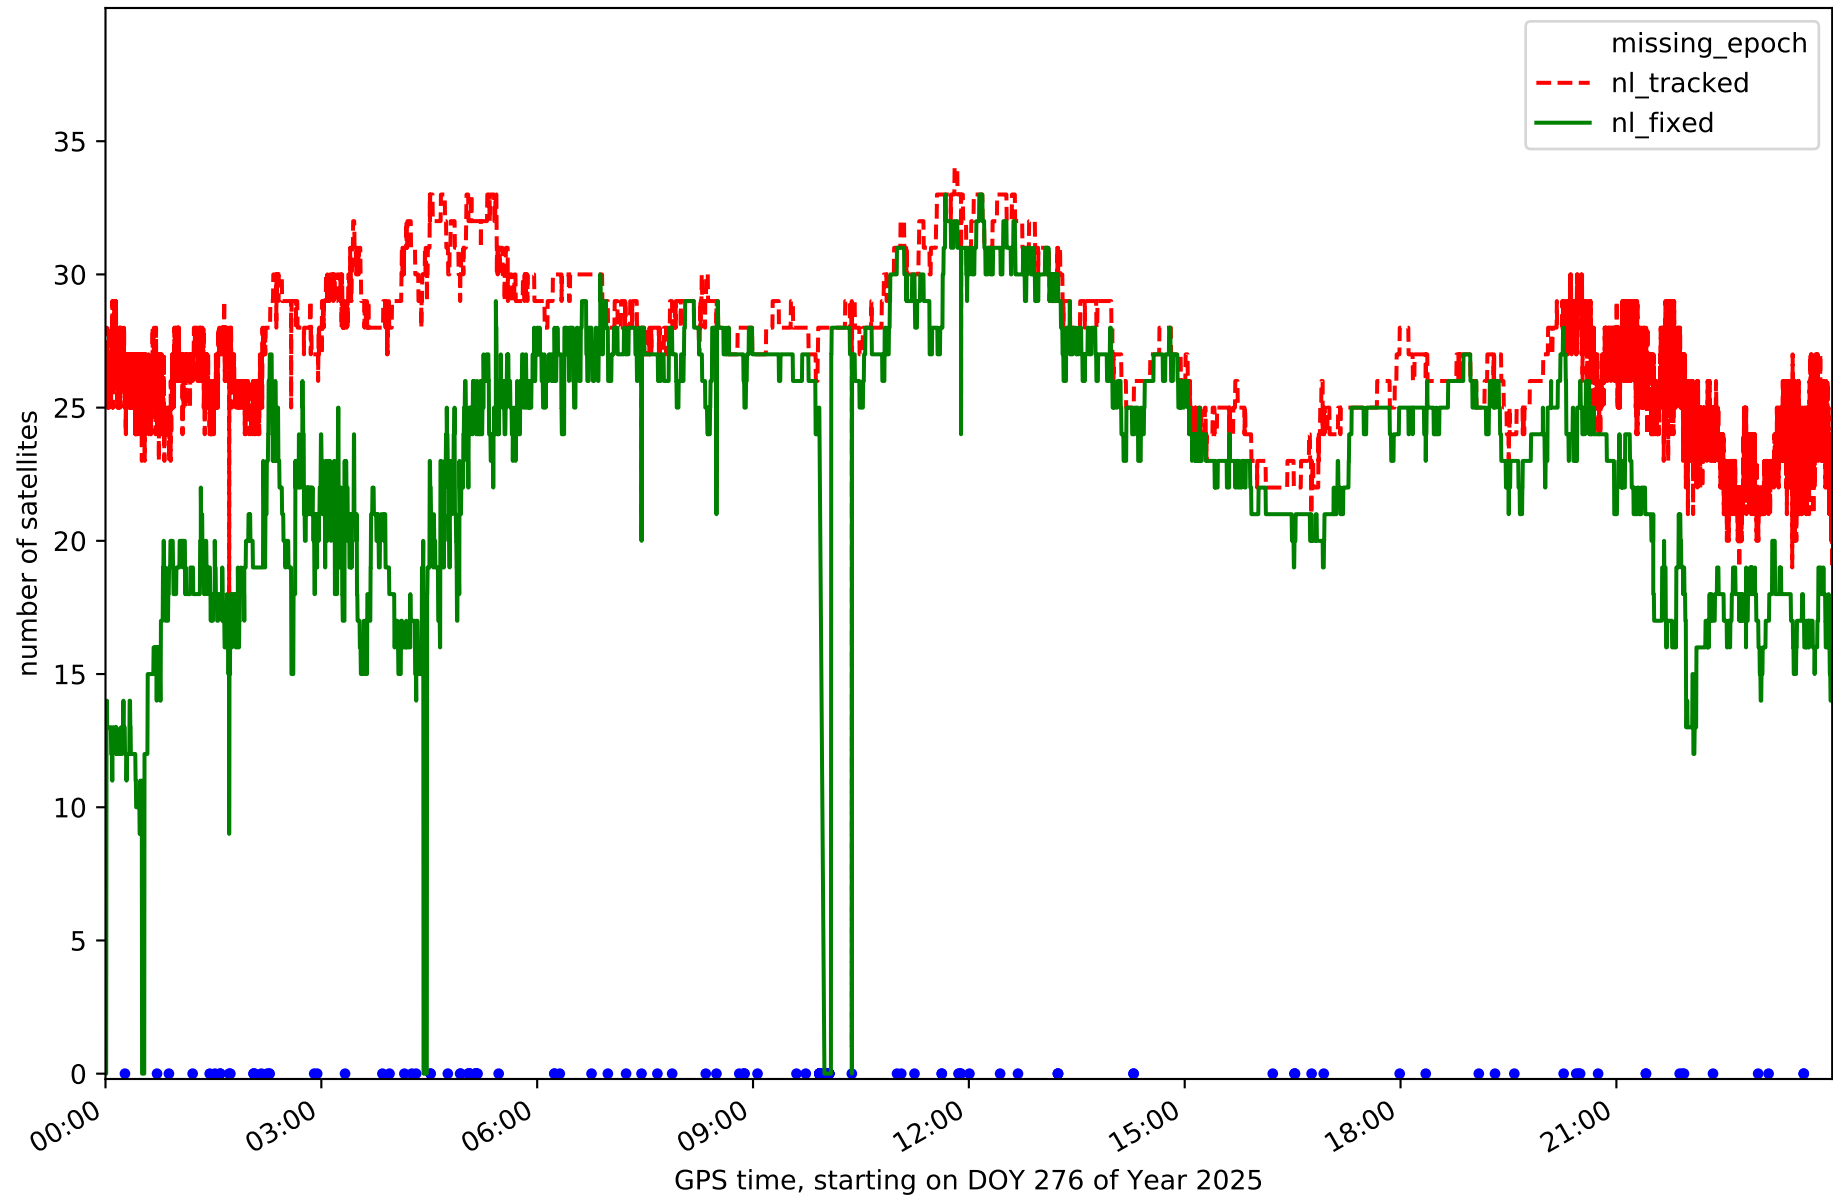


Station TE11 in network N32T

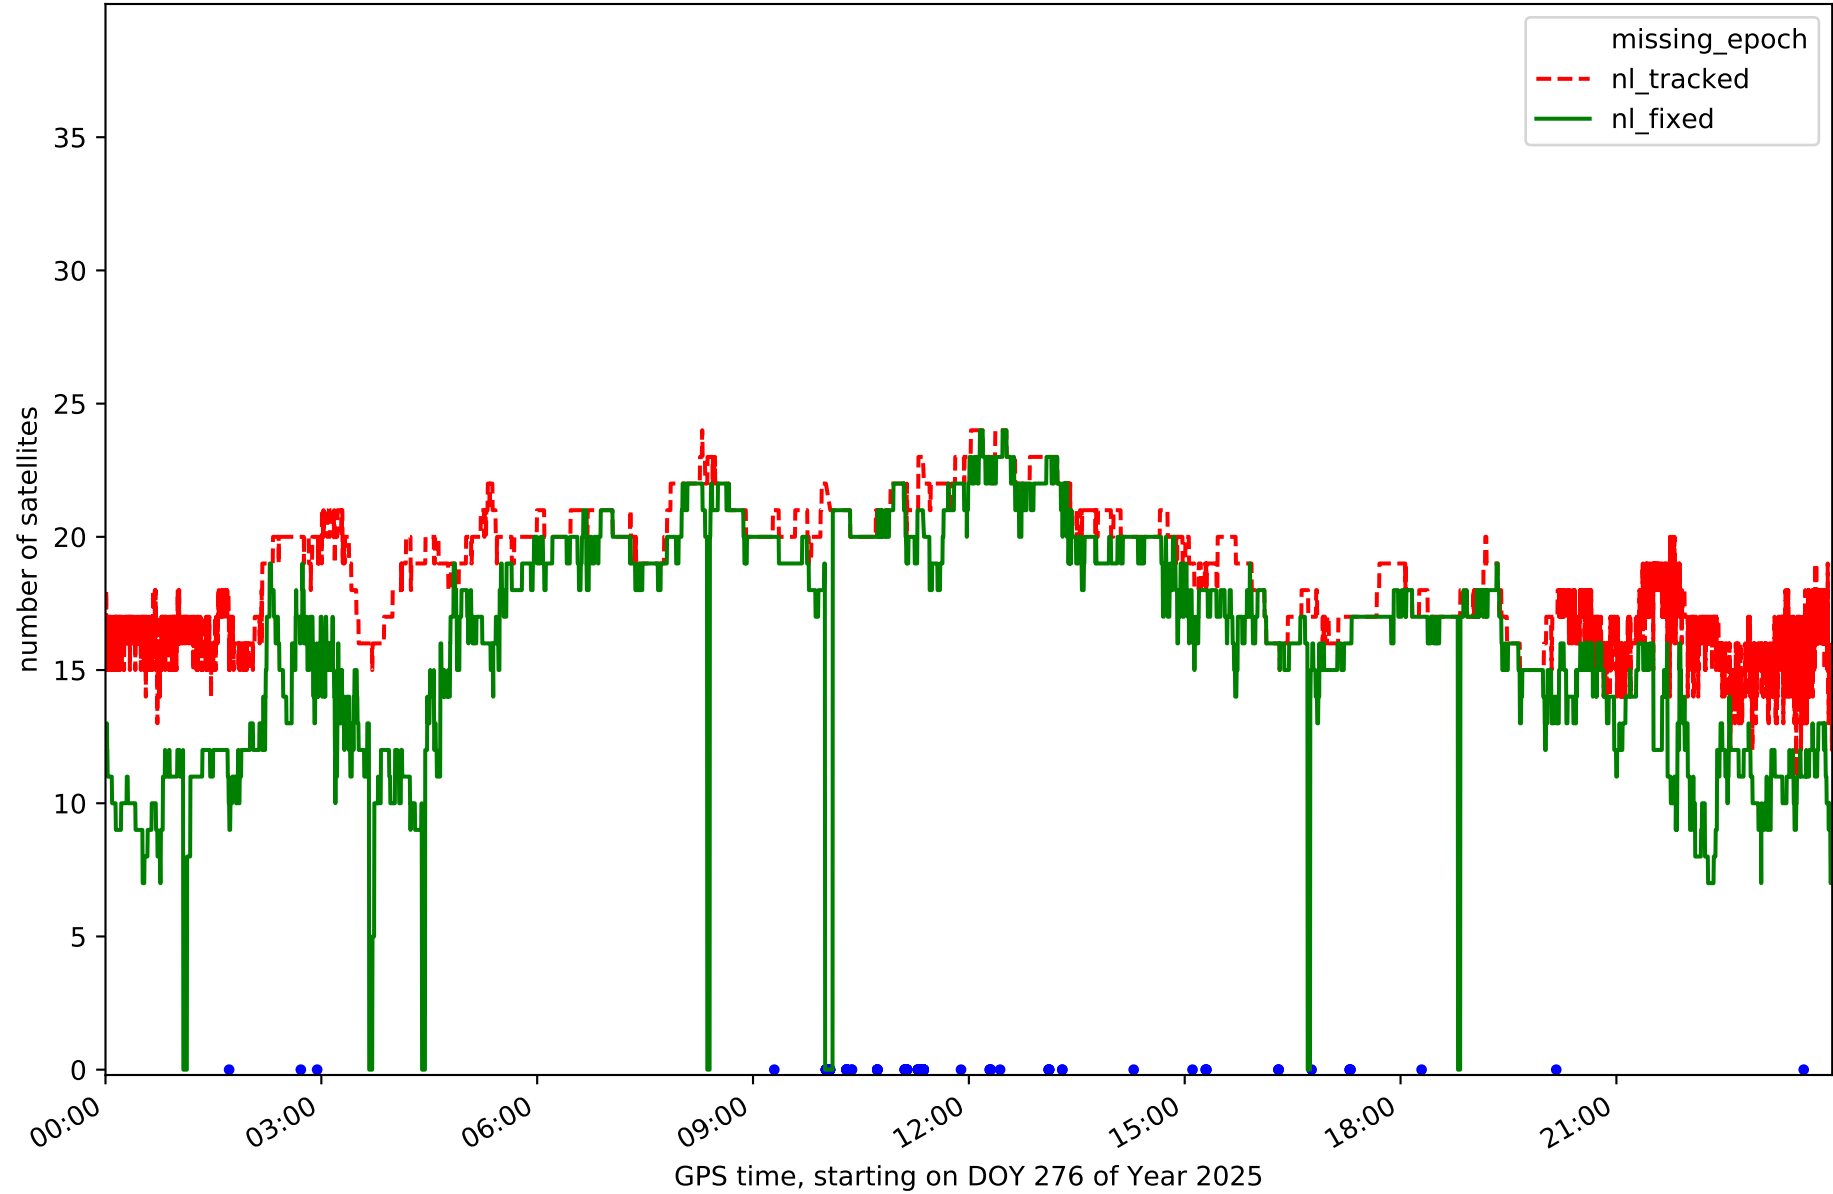


RefCheck for station EH01 in network N32T

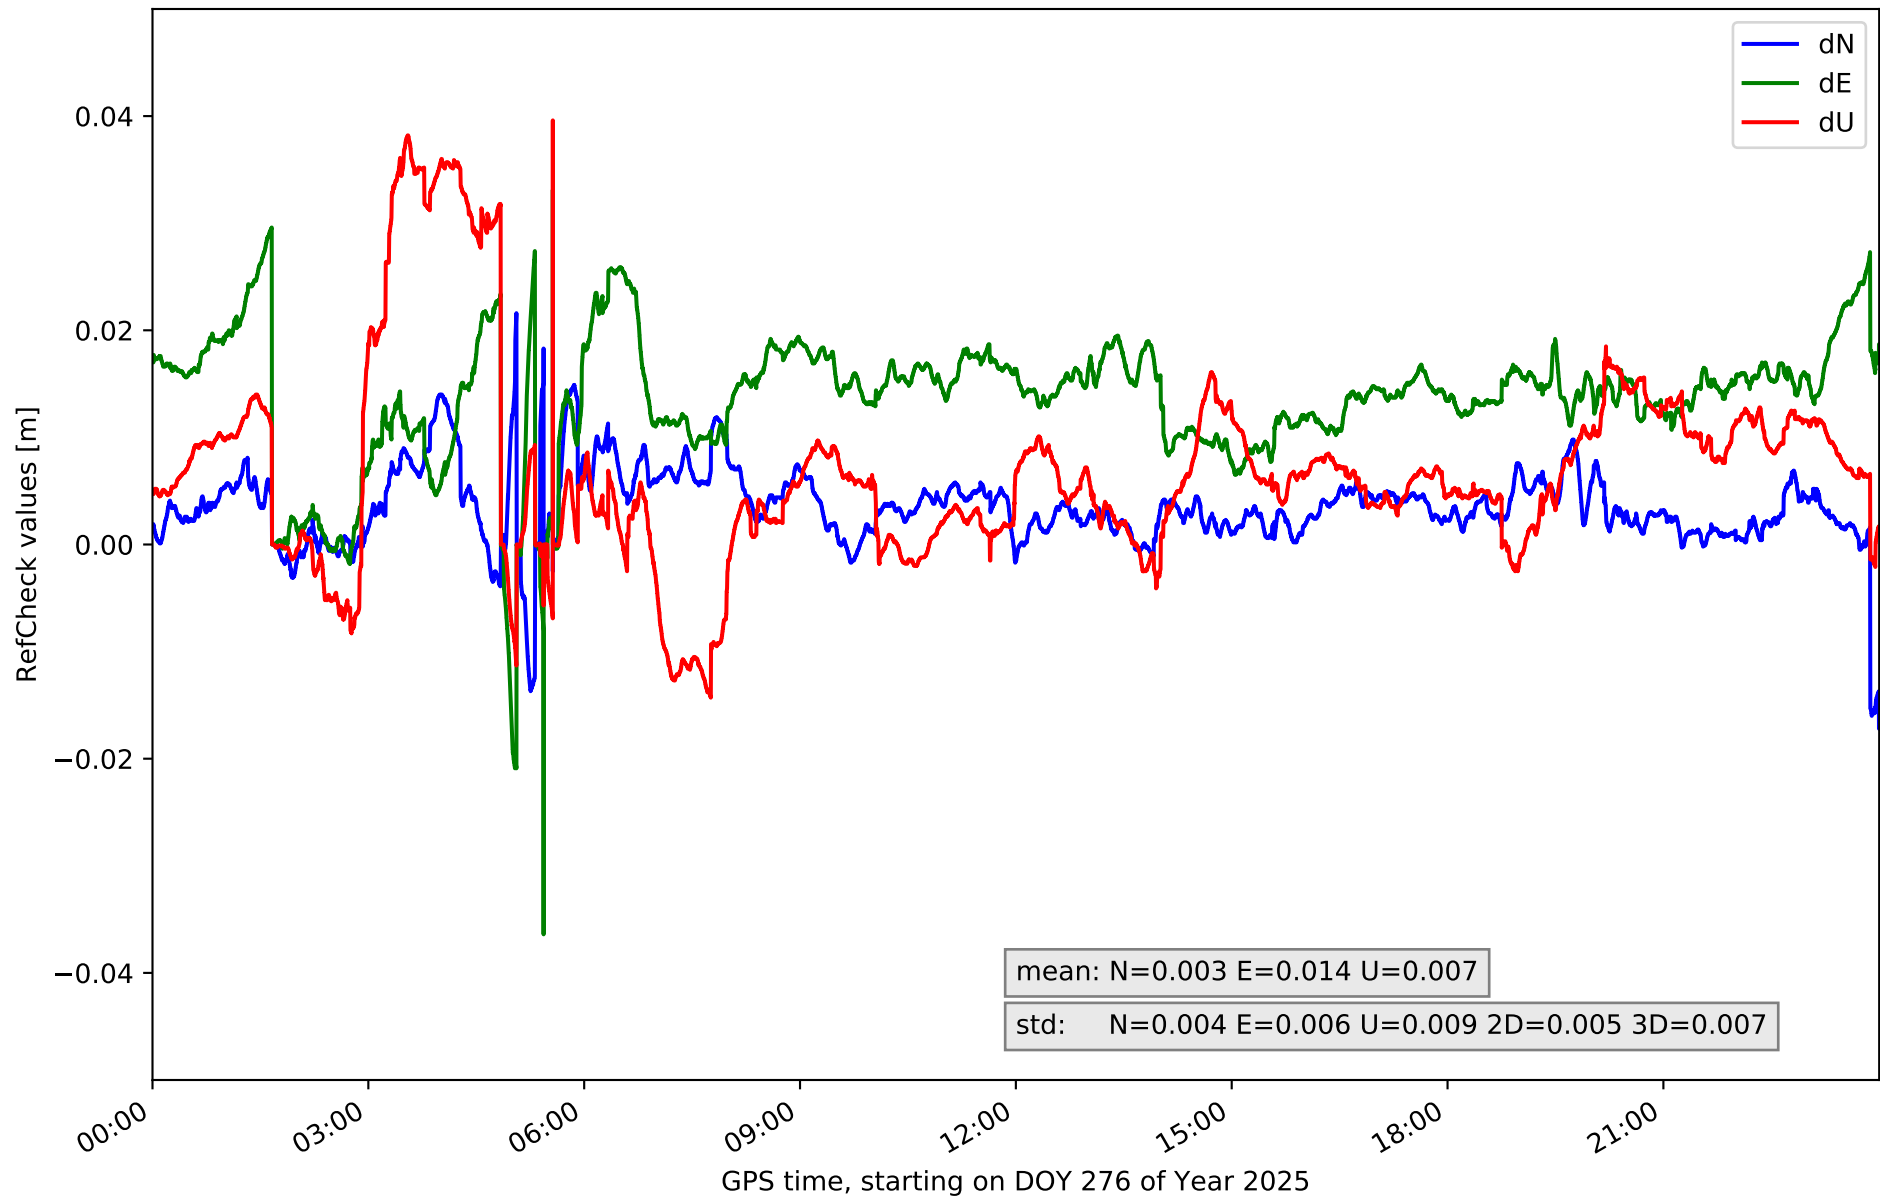


RefCheck for station GOM1 in network N32T

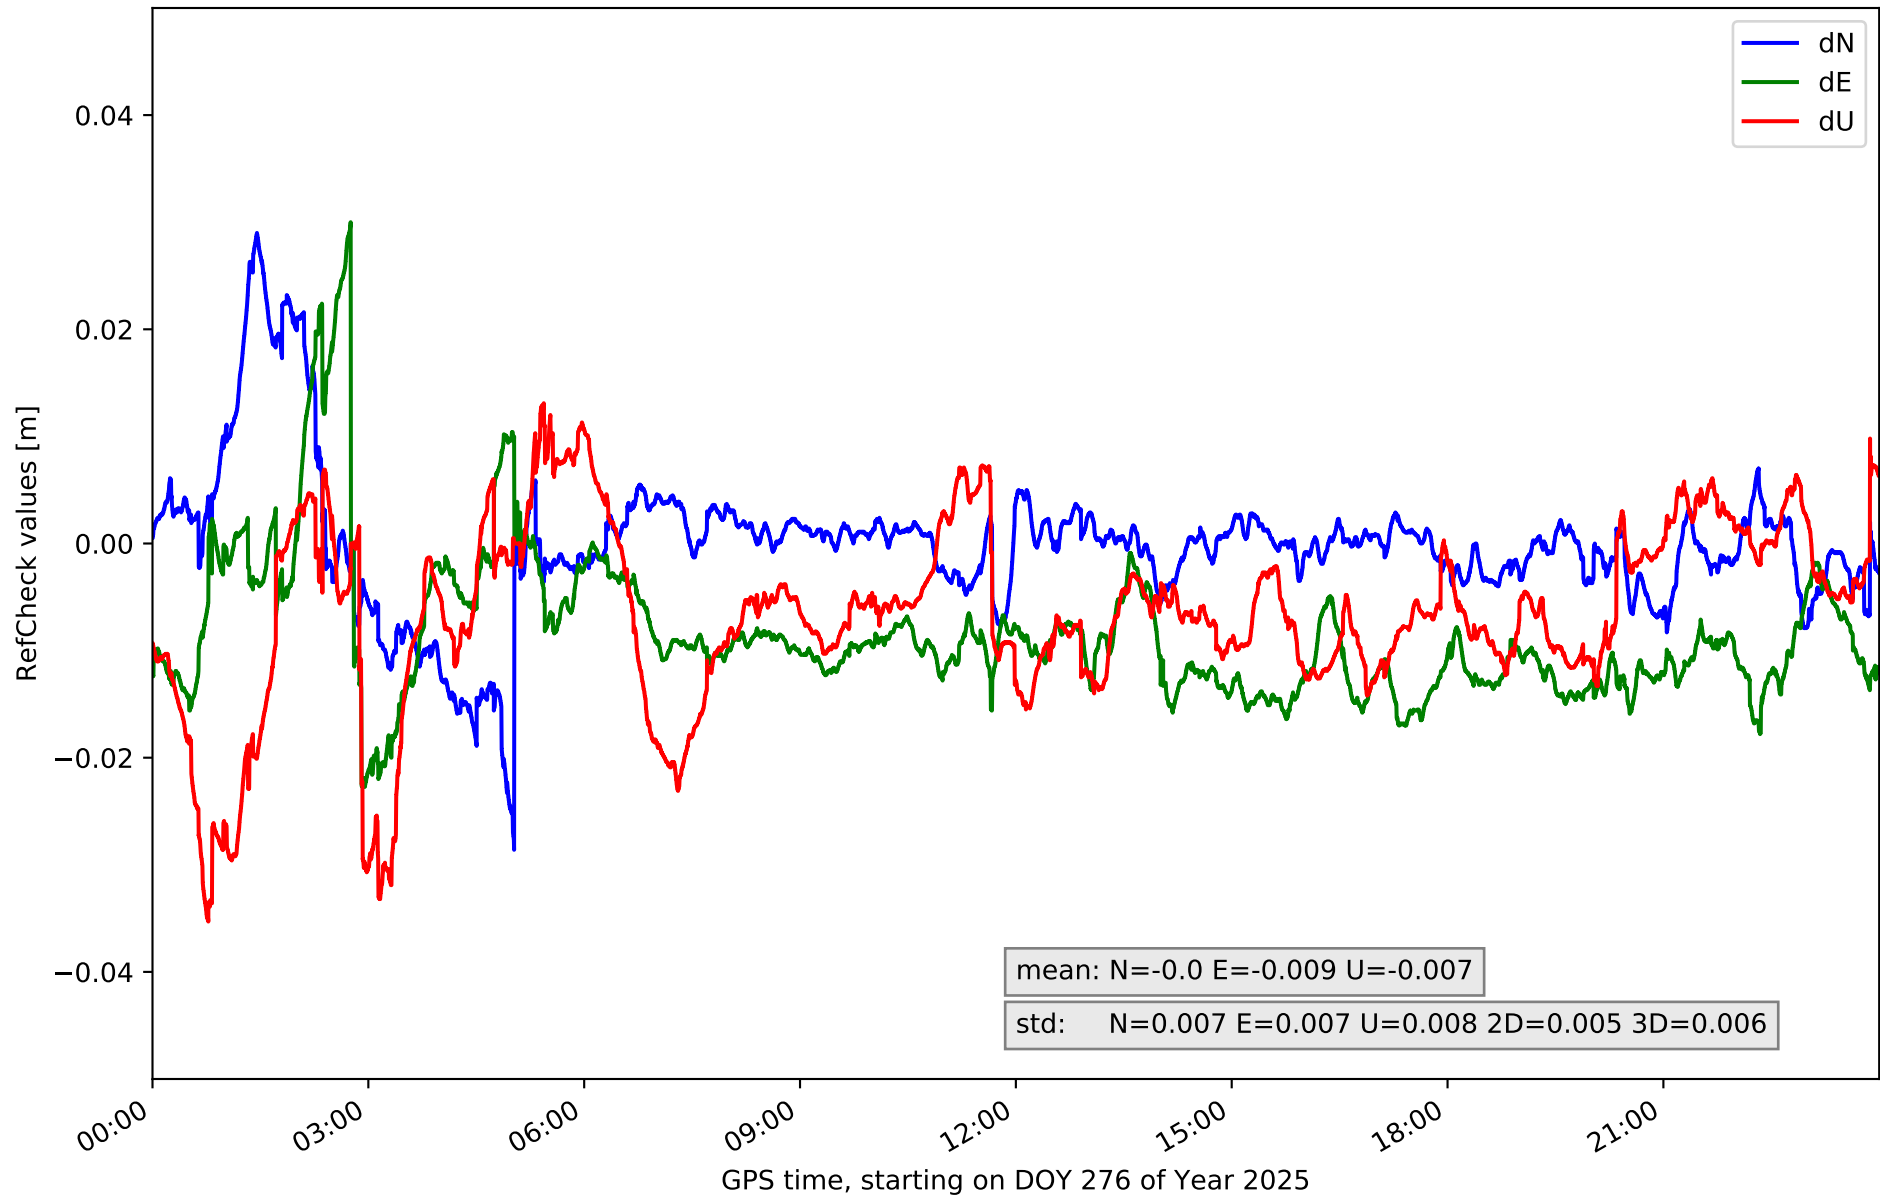


RefCheck for station GOME in network N32T

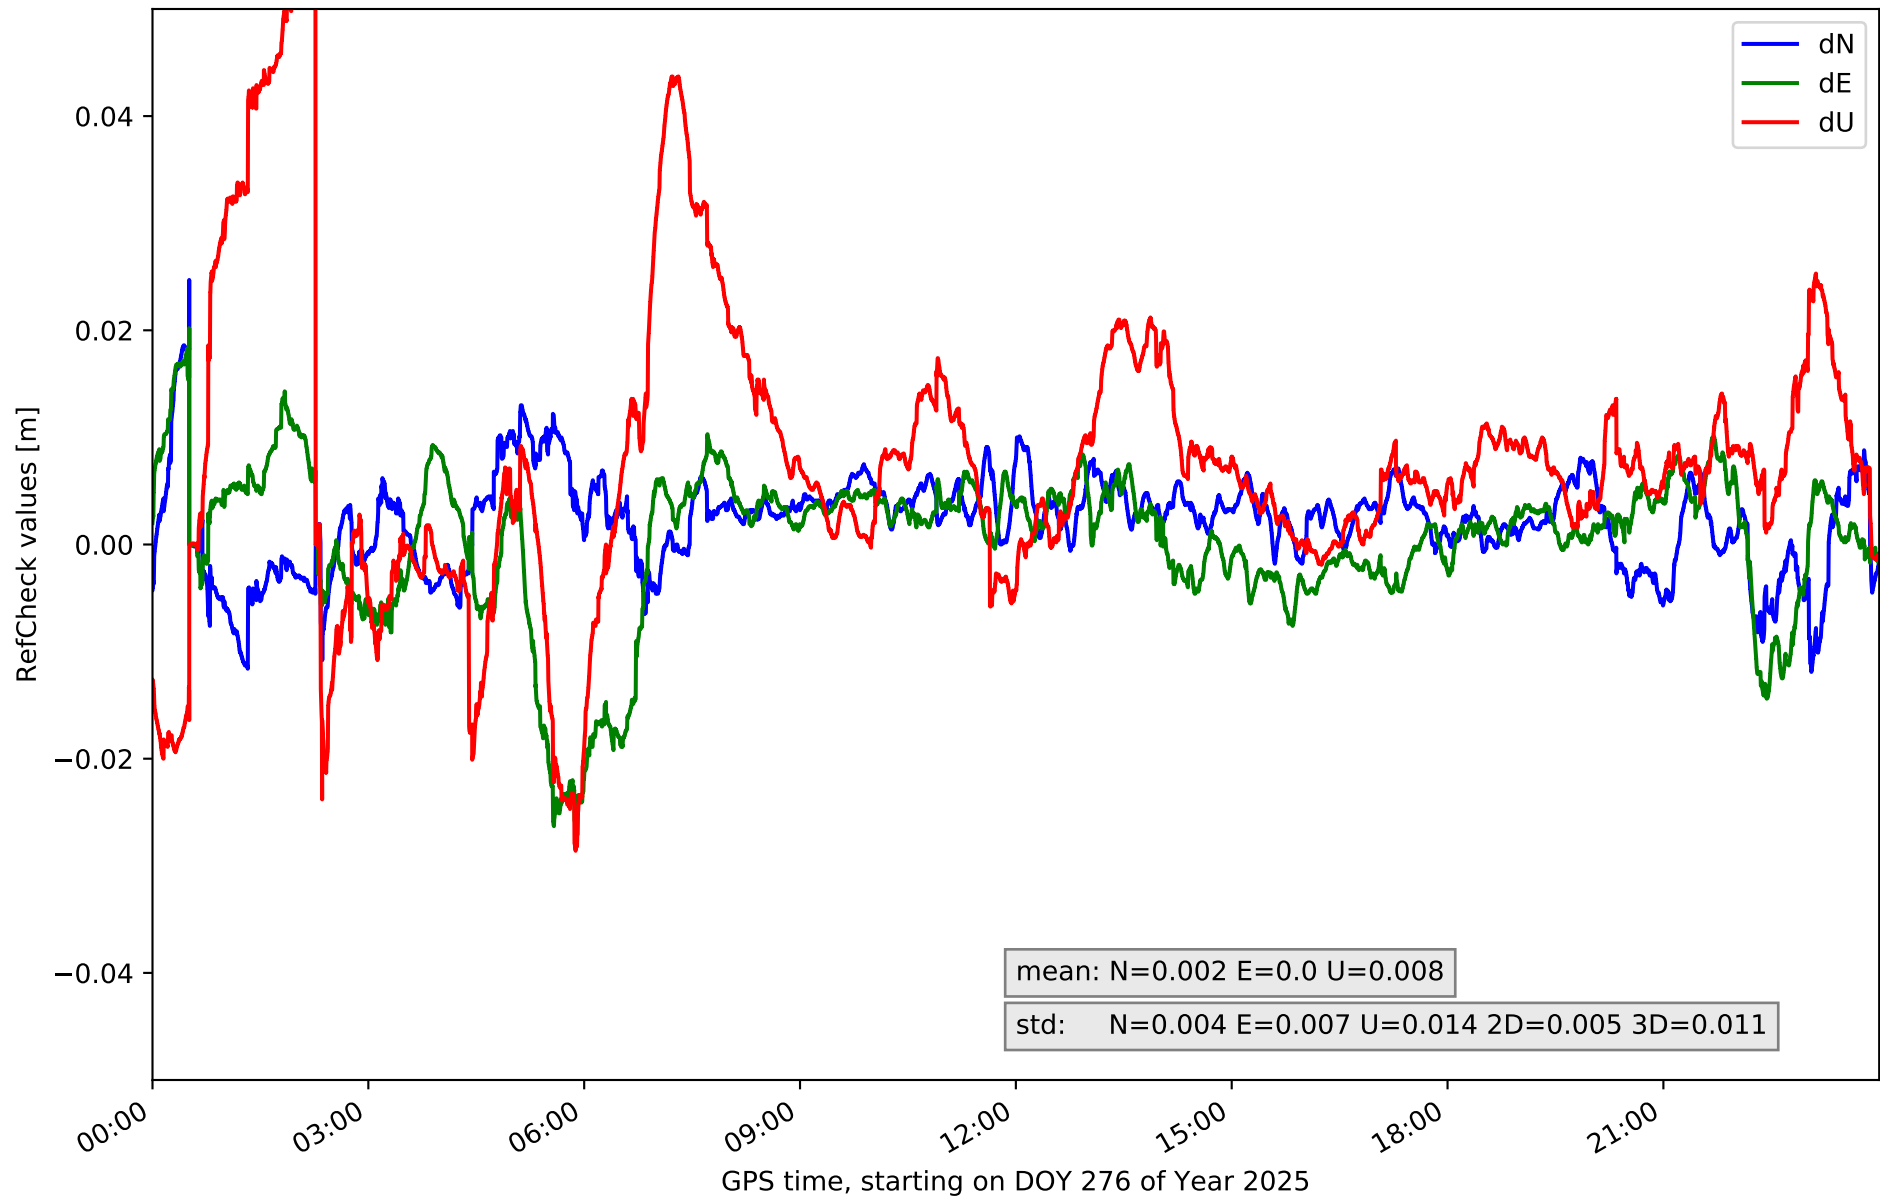


RefCheck for station IZAN in network N32T

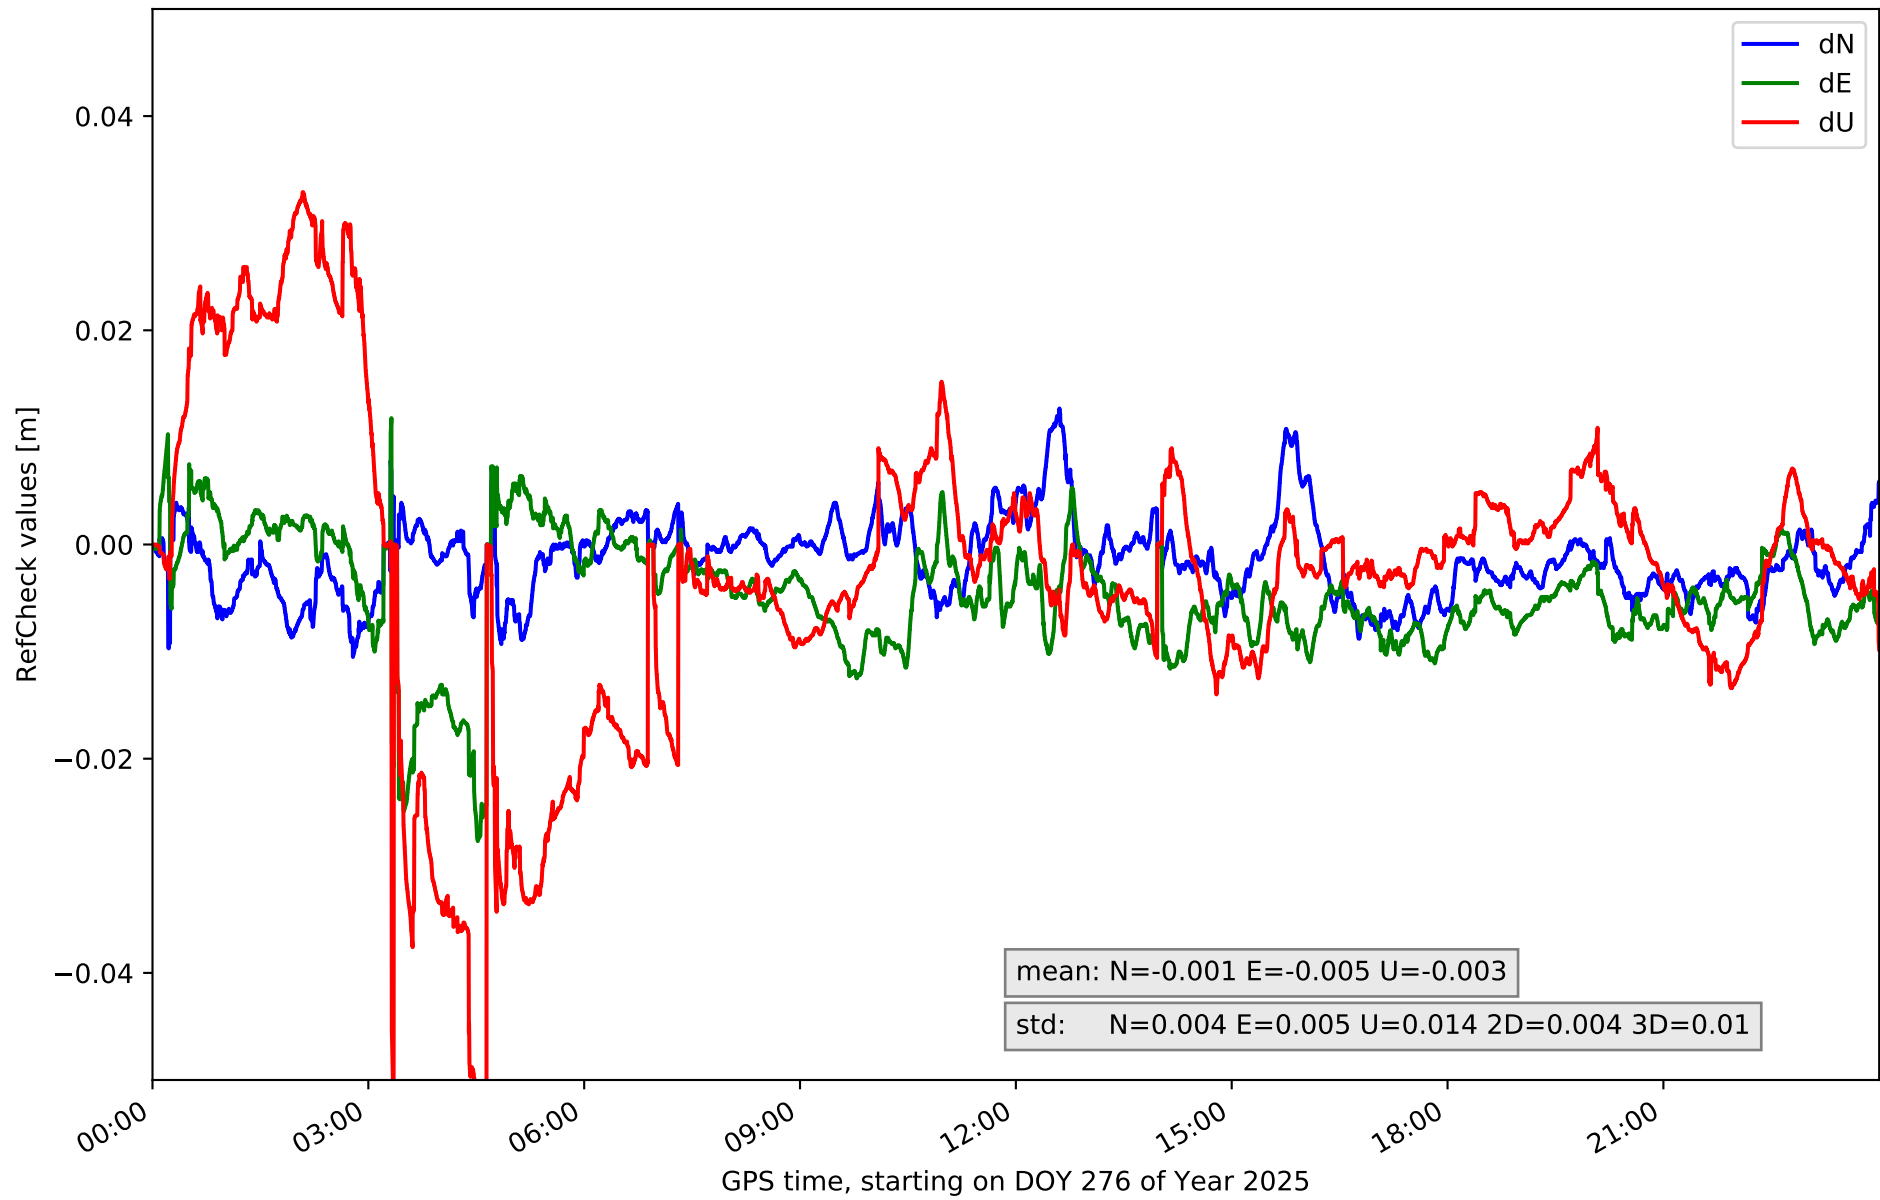


RefCheck for station LP01 in network N32T

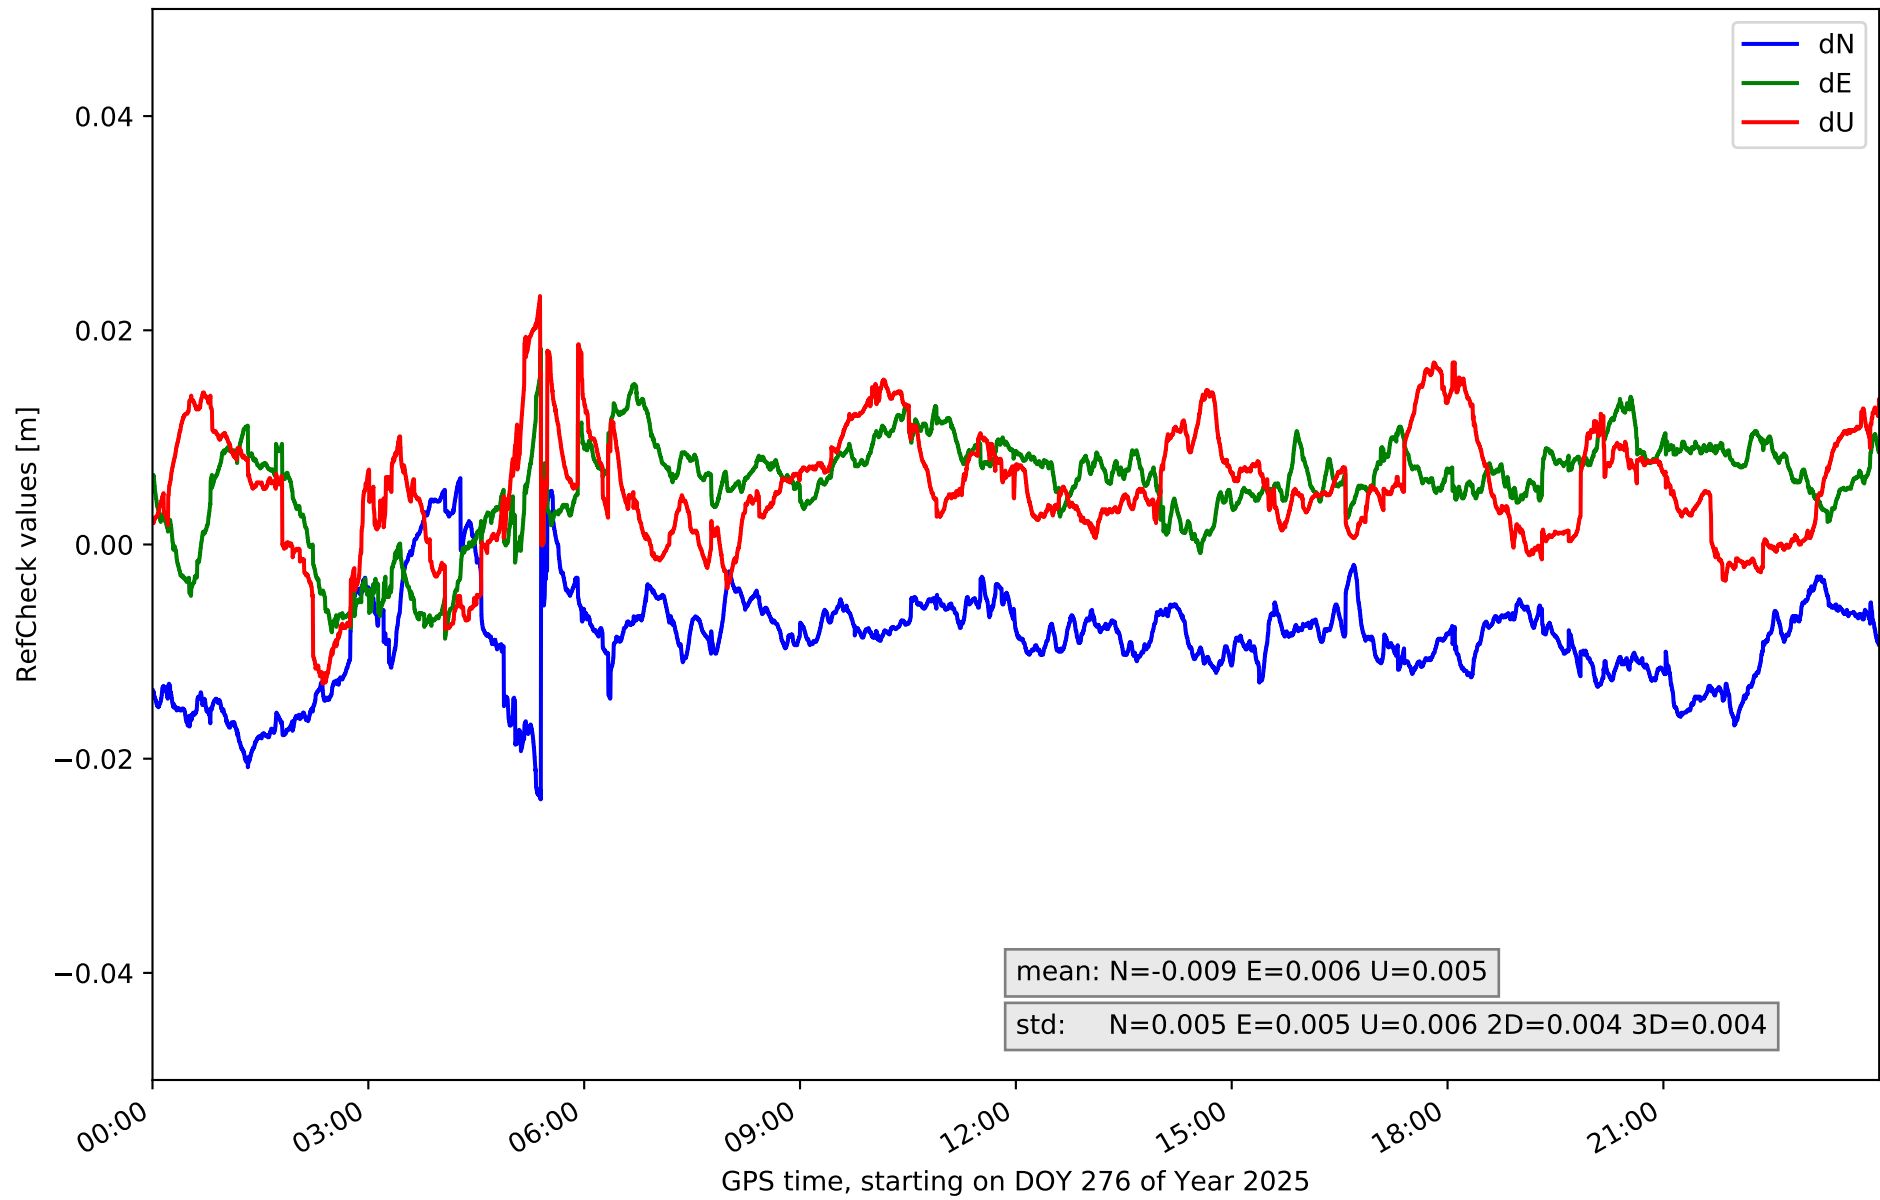


RefCheck for station LP03 in network N32T

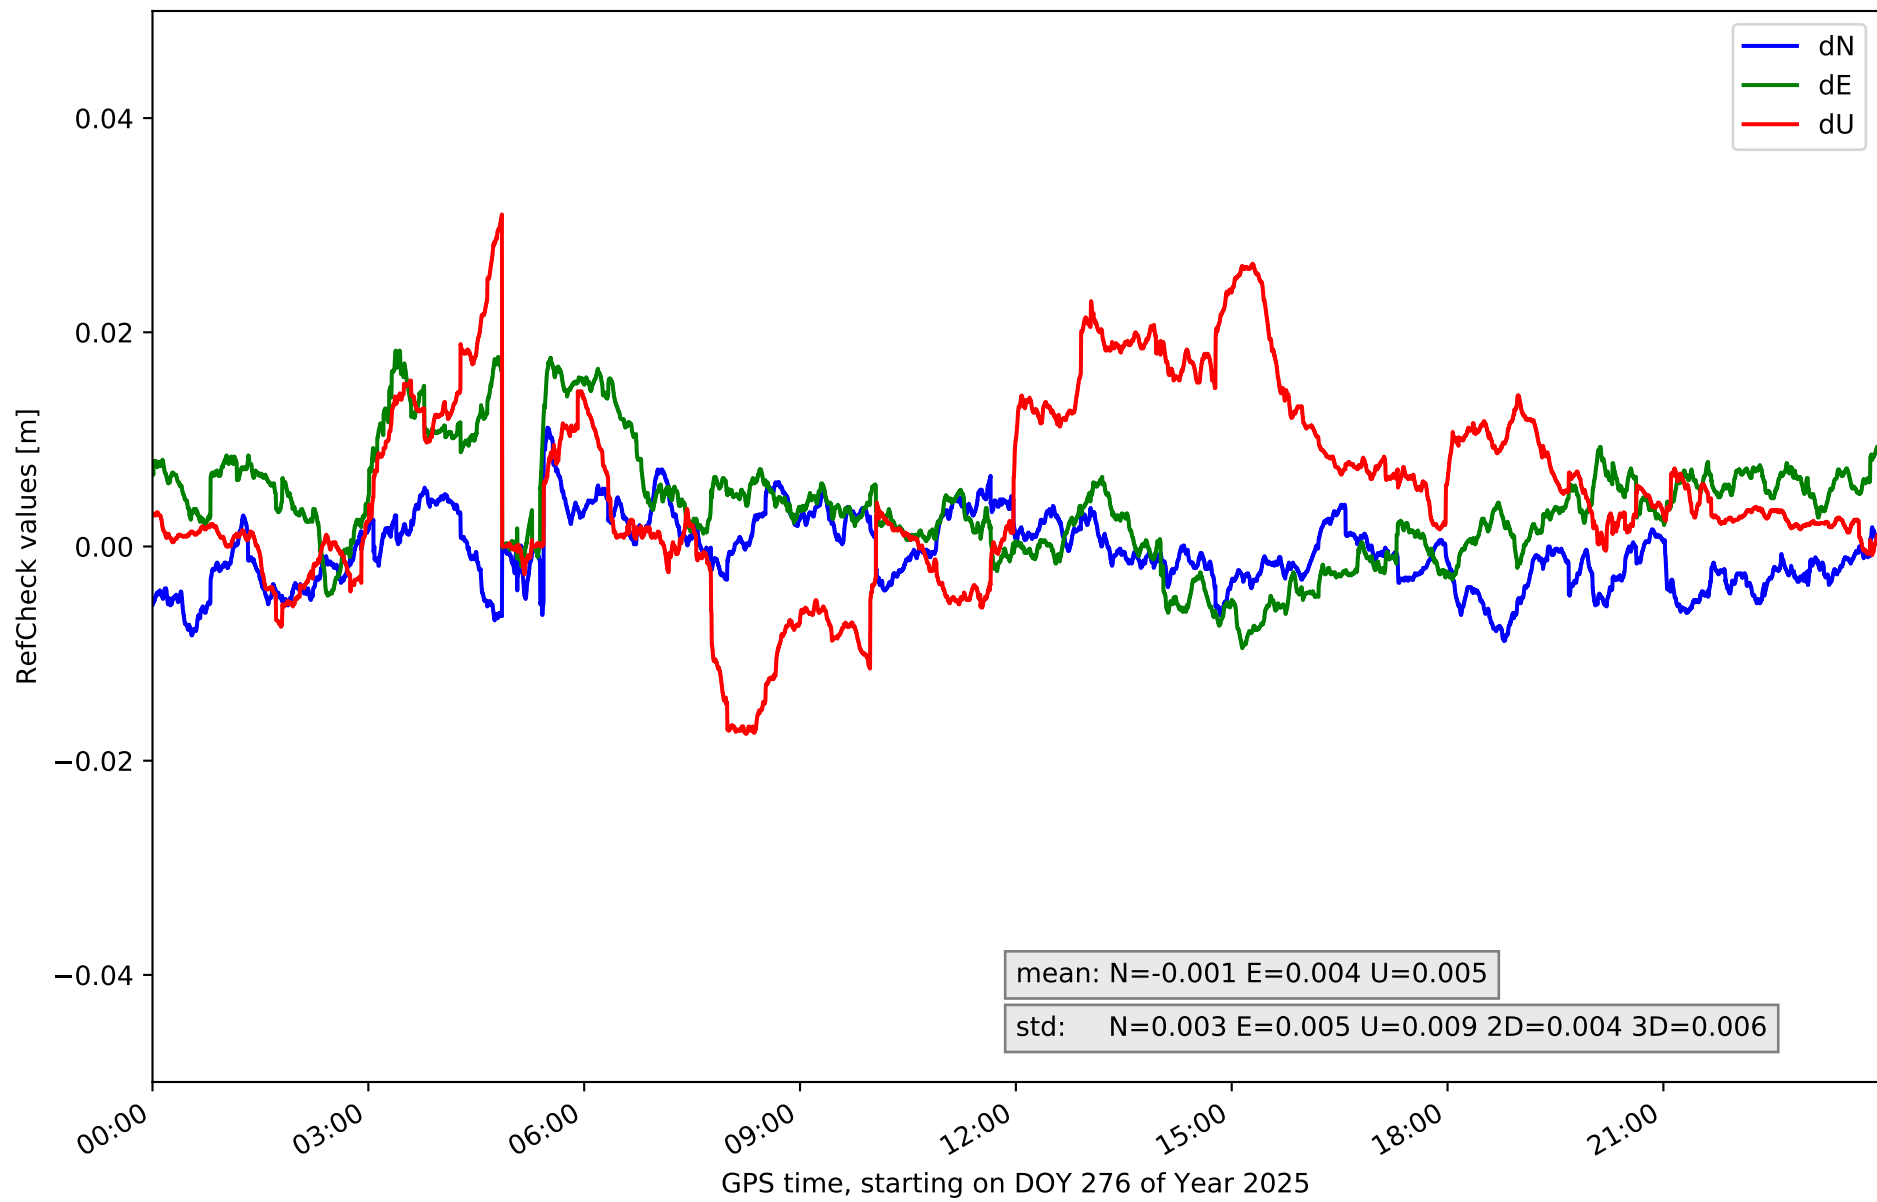


RefCheck for station LPAL in network N32T

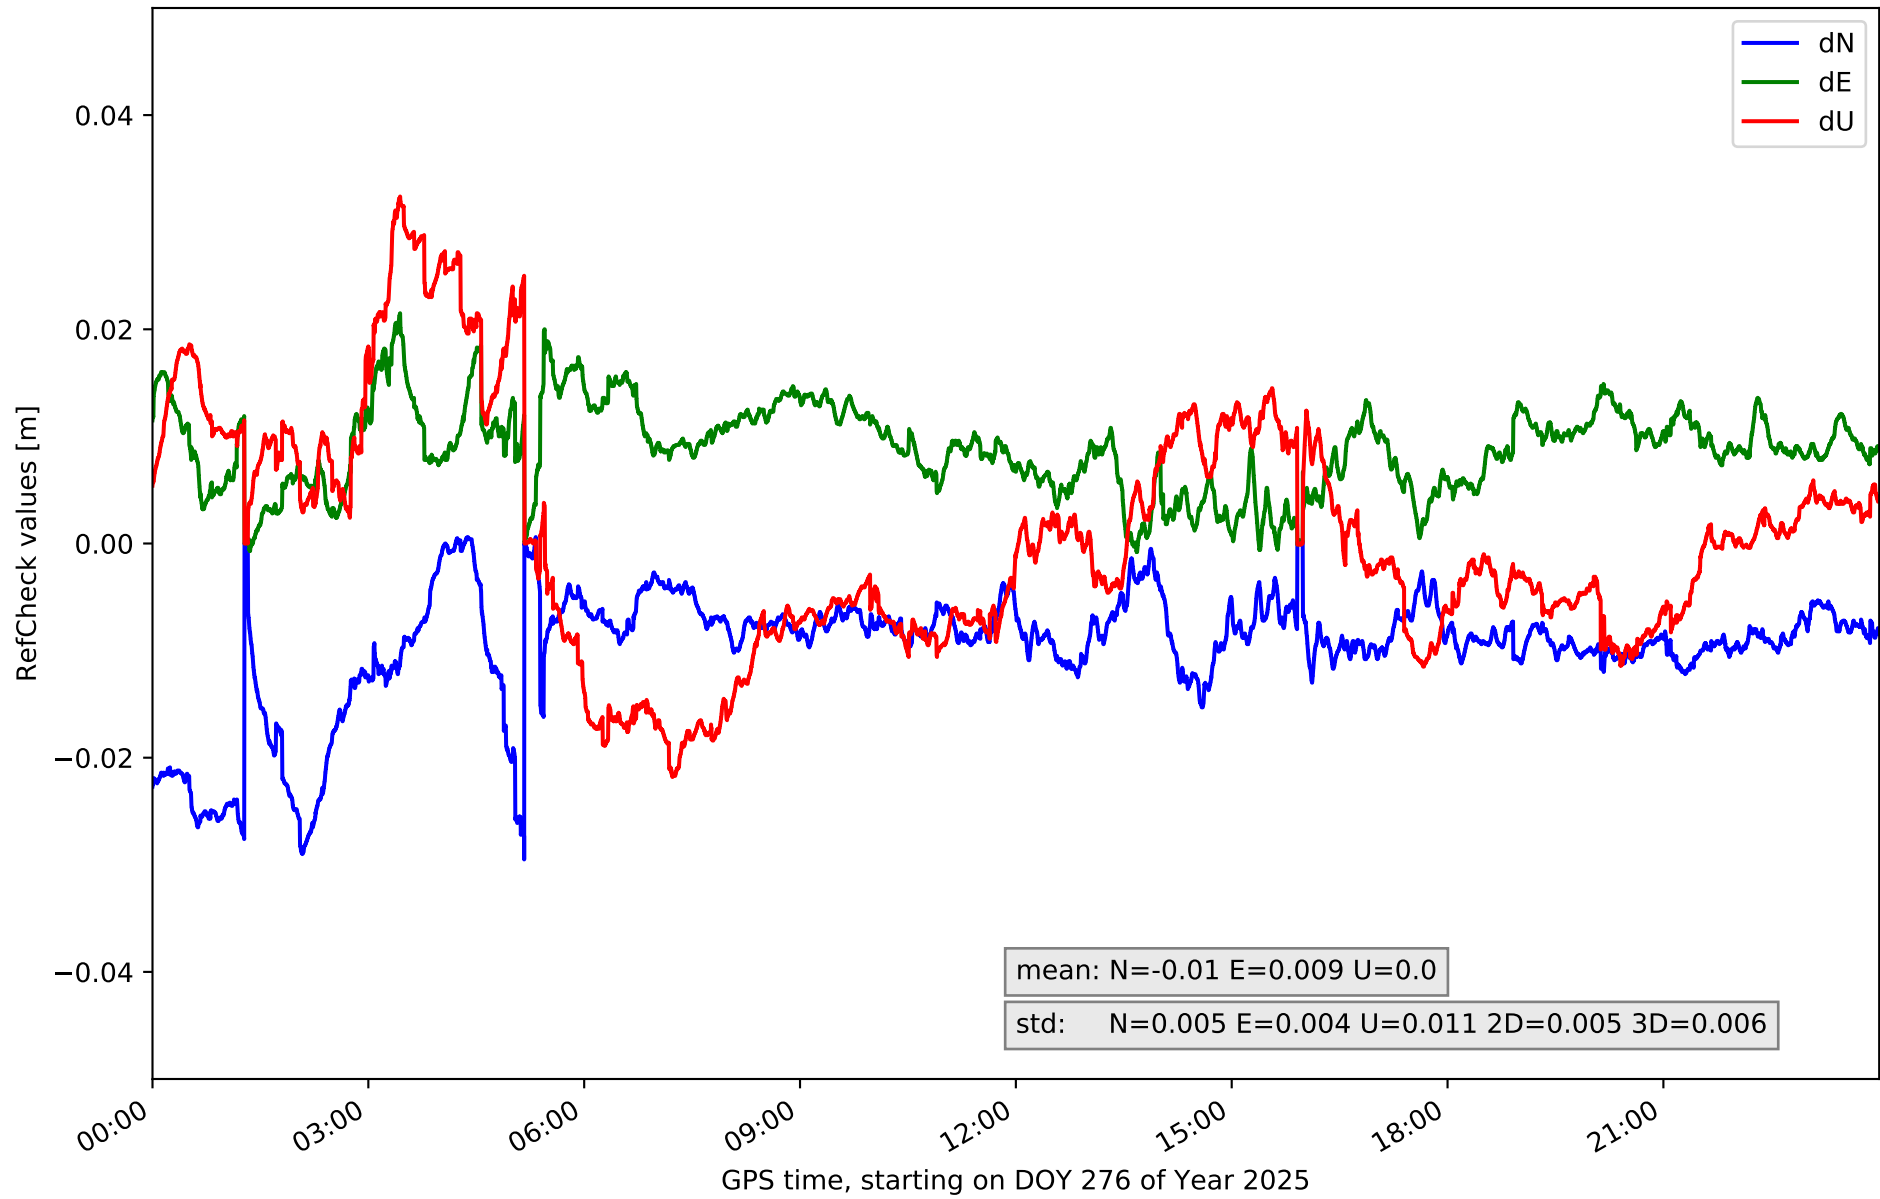


RefCheck for station LRES in network N32T

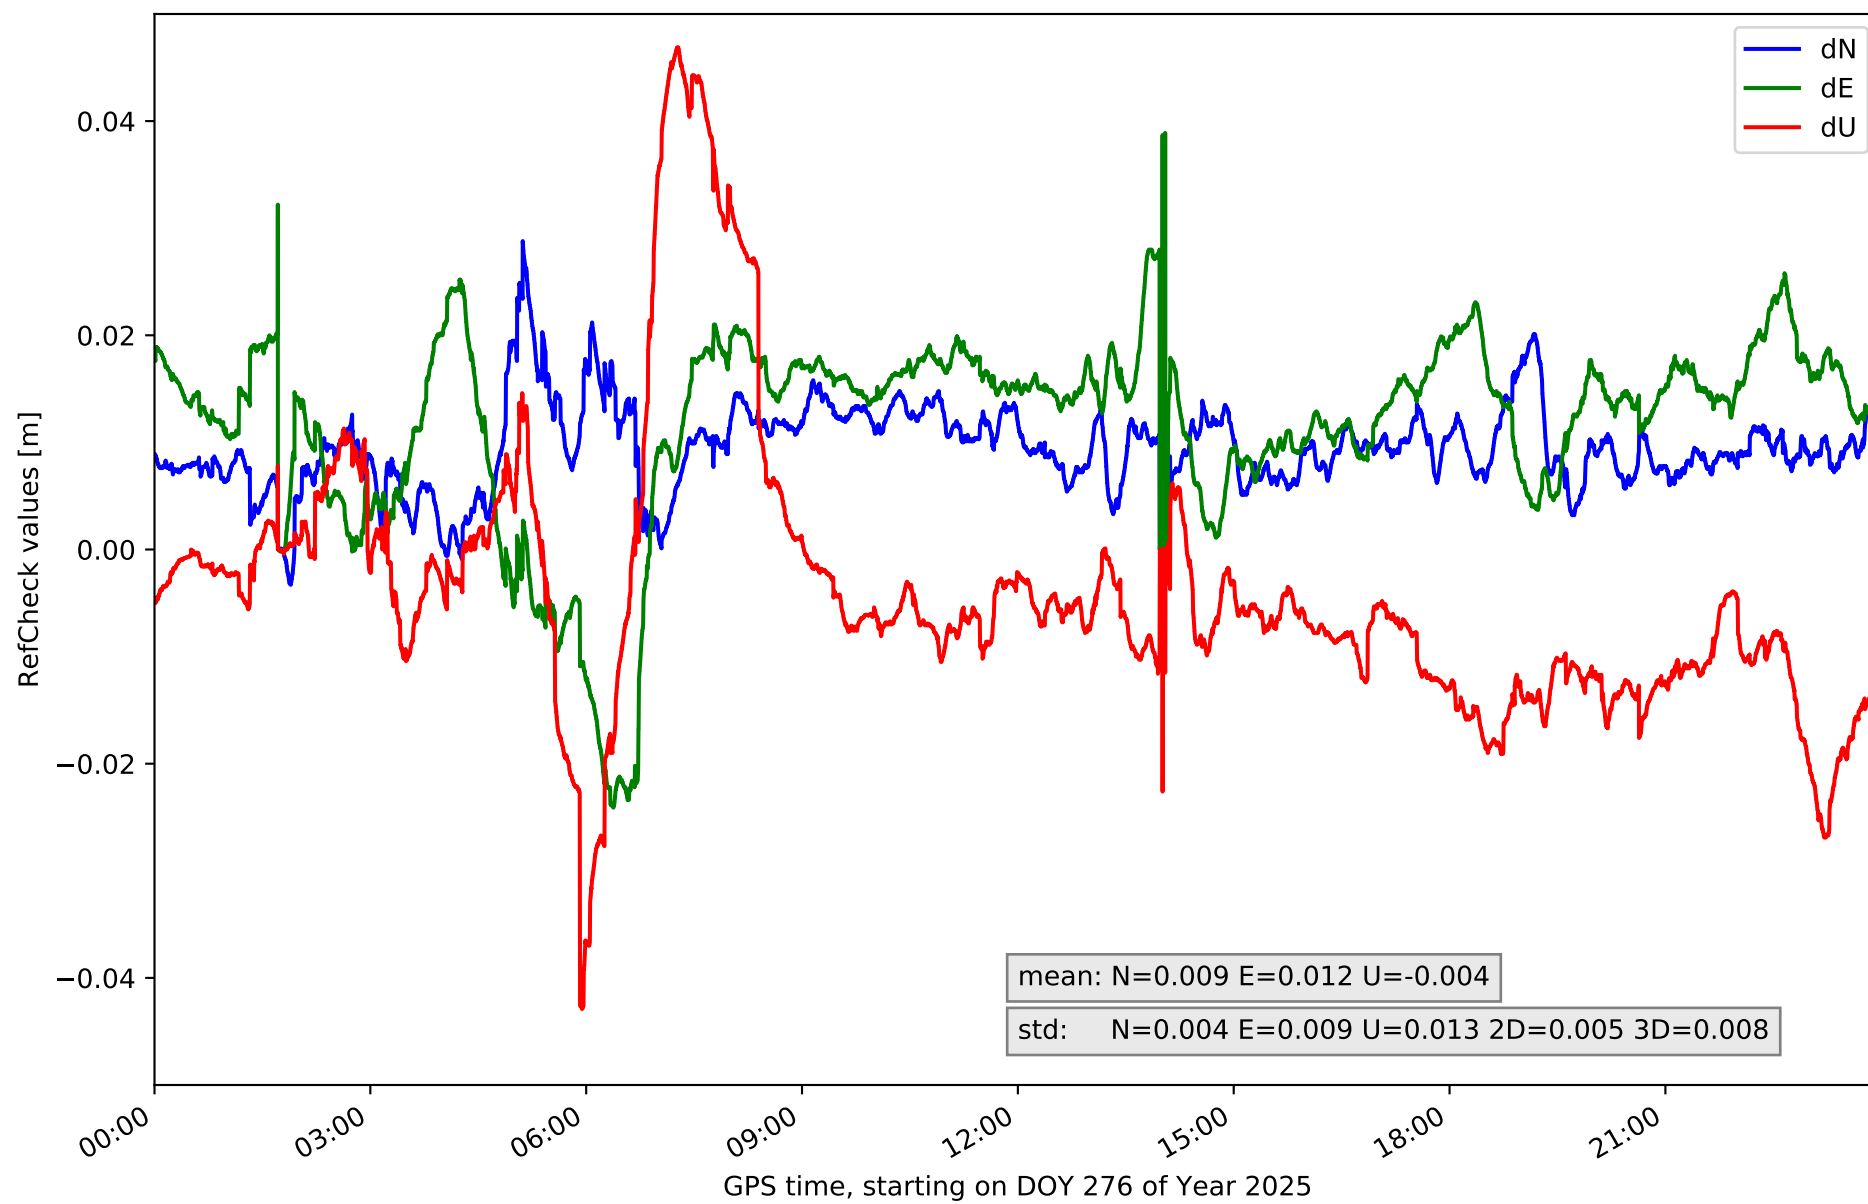


RefCheck for station TN01 in network N32T

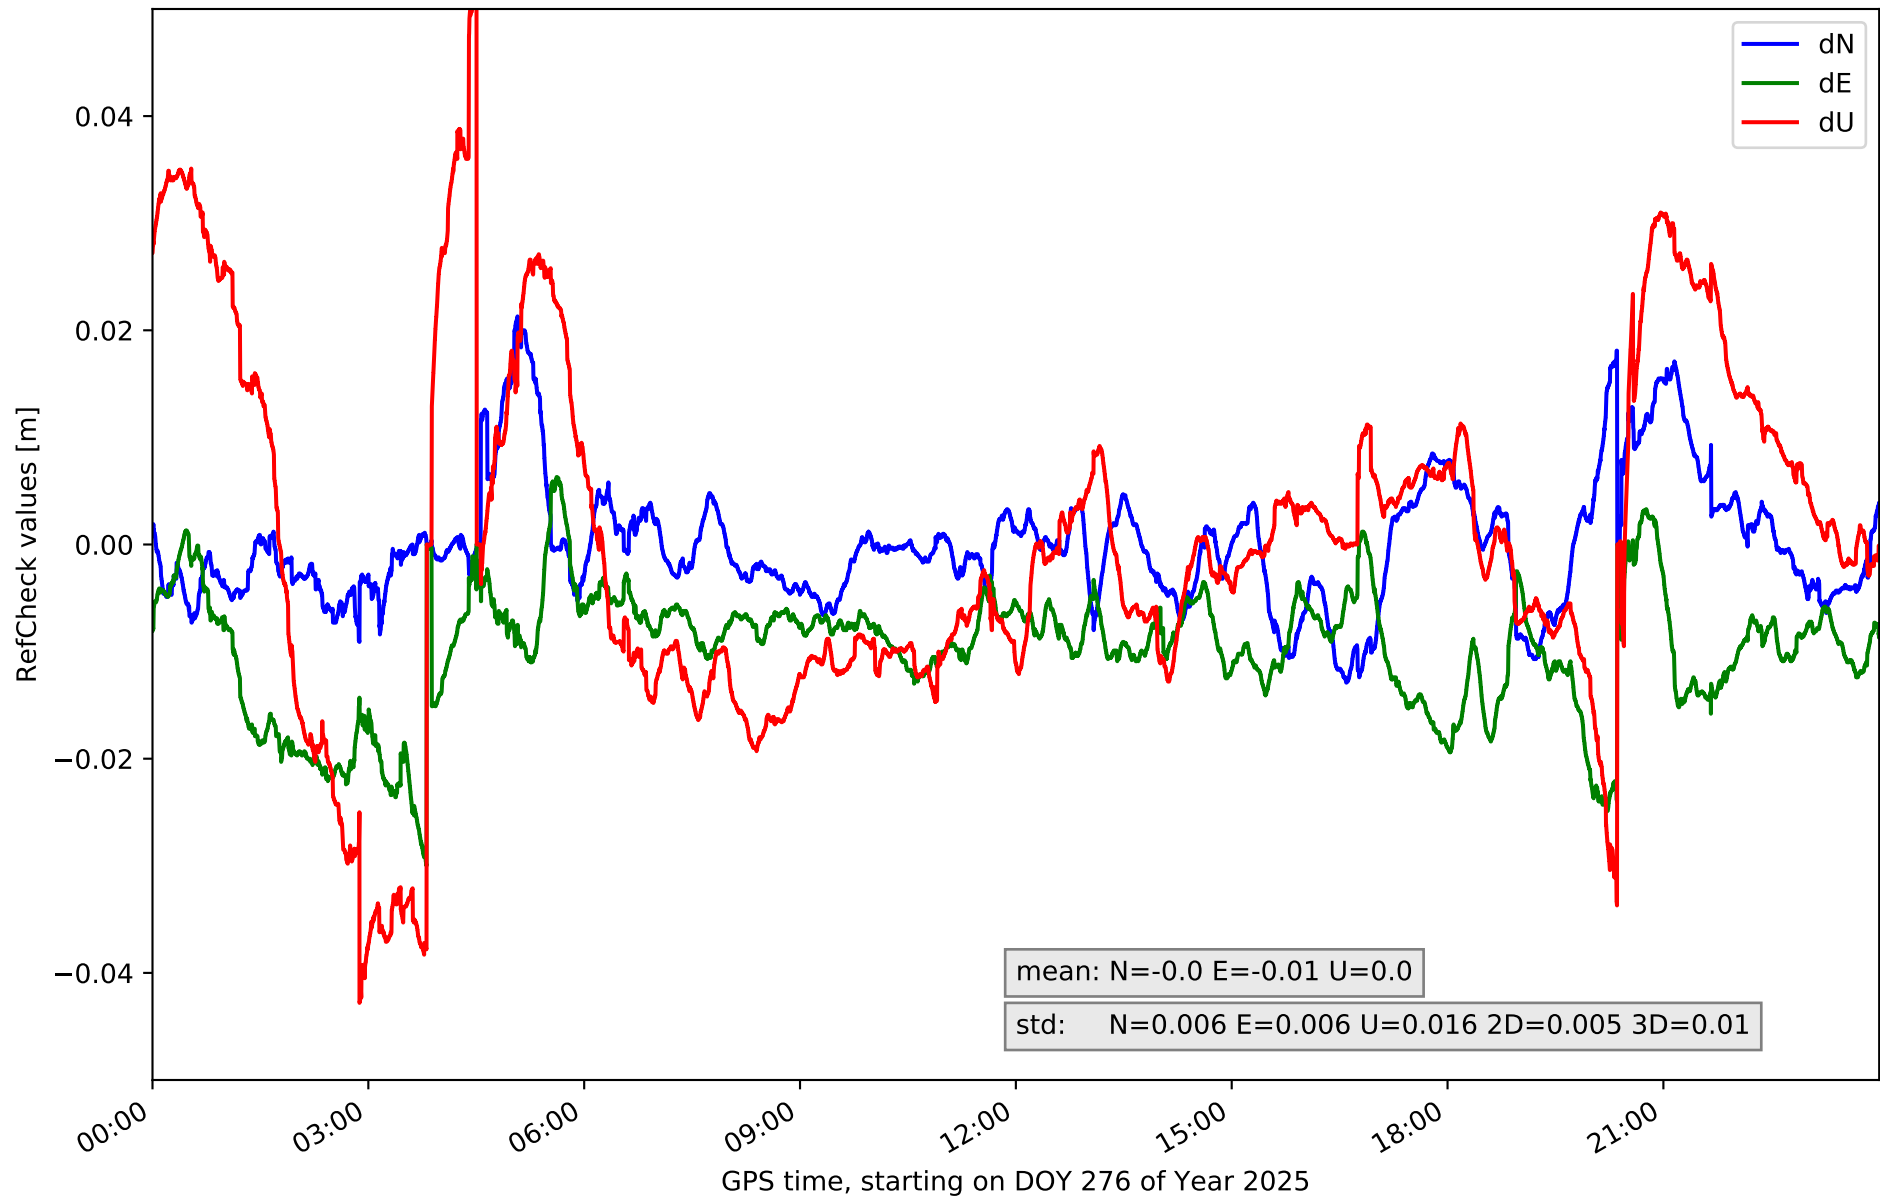


RefCheck for station TN02 in network N32T

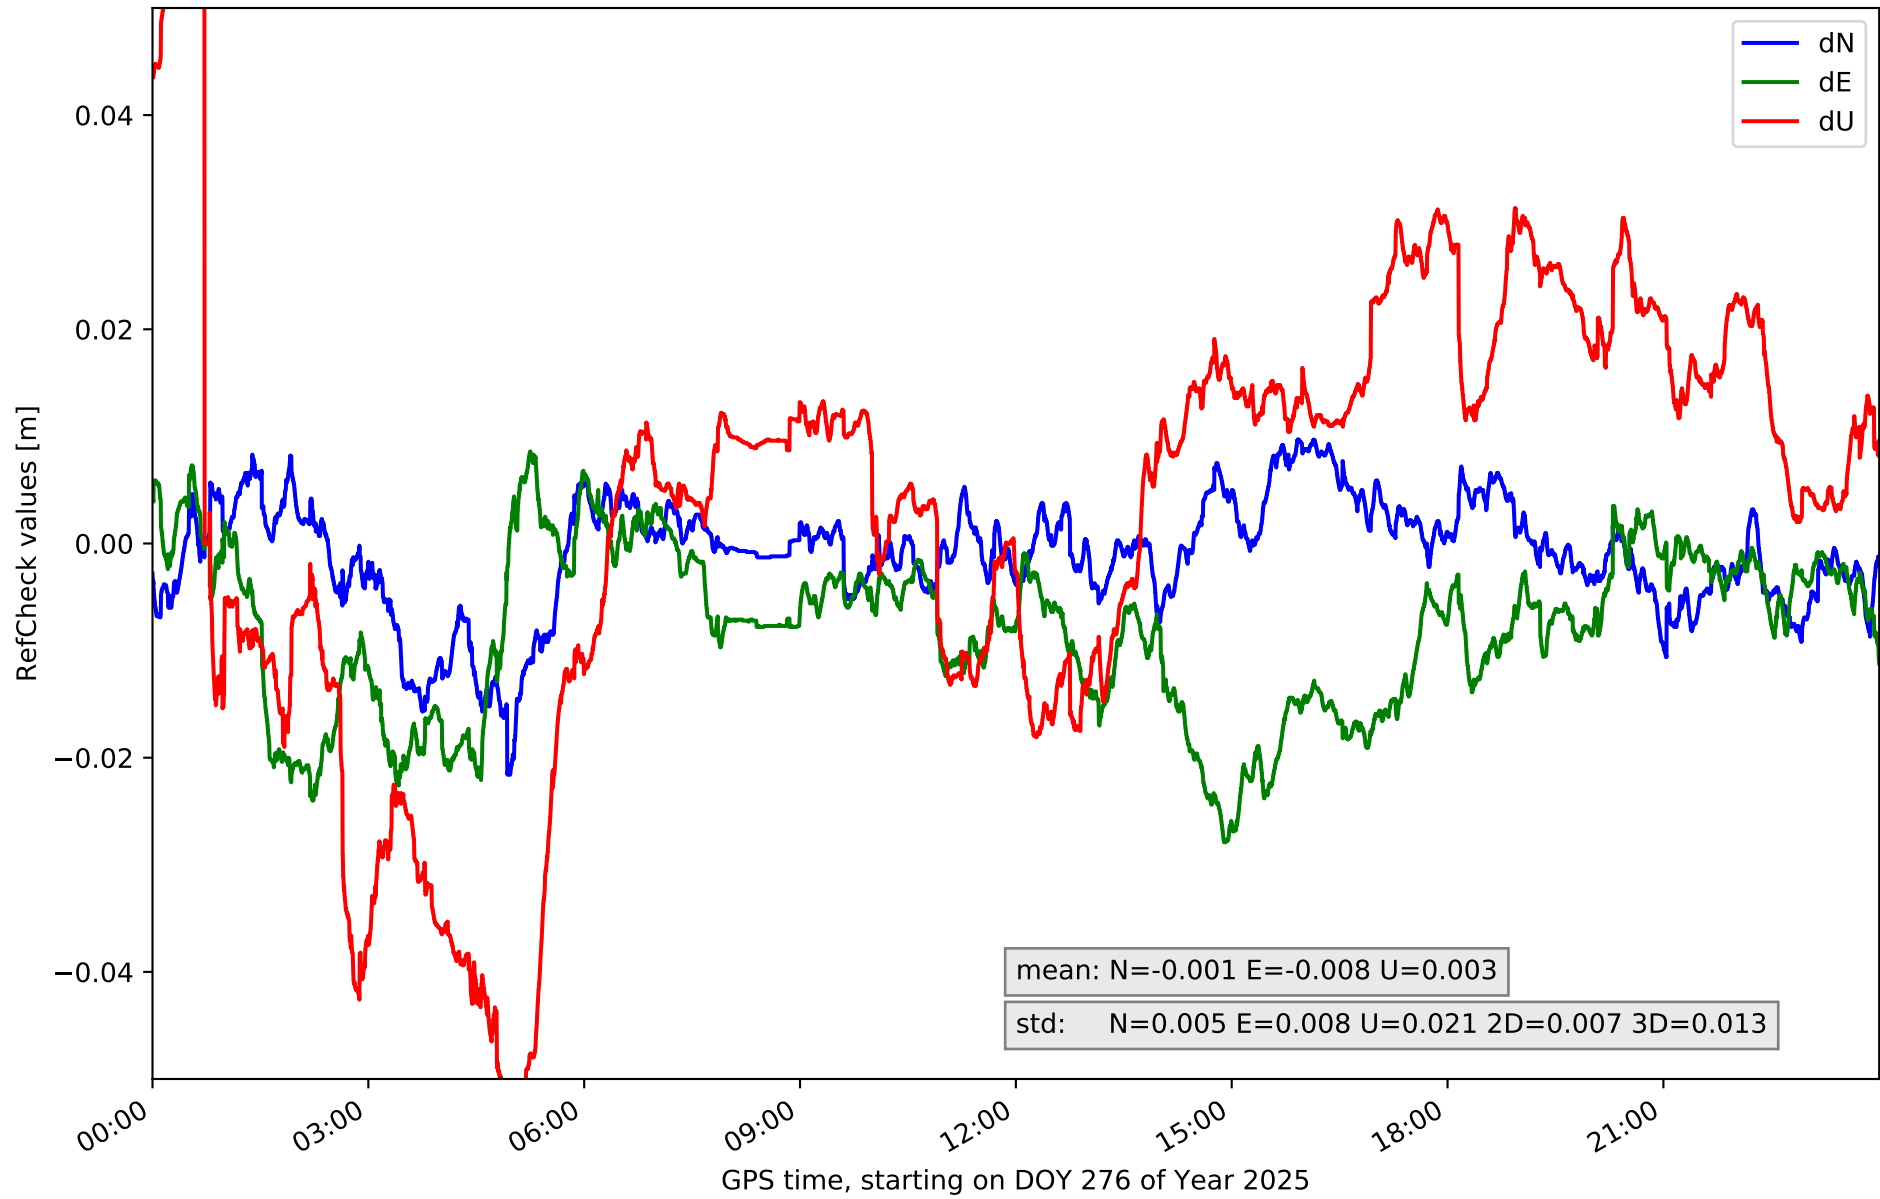


RefCheck for station TN03 in network N32T

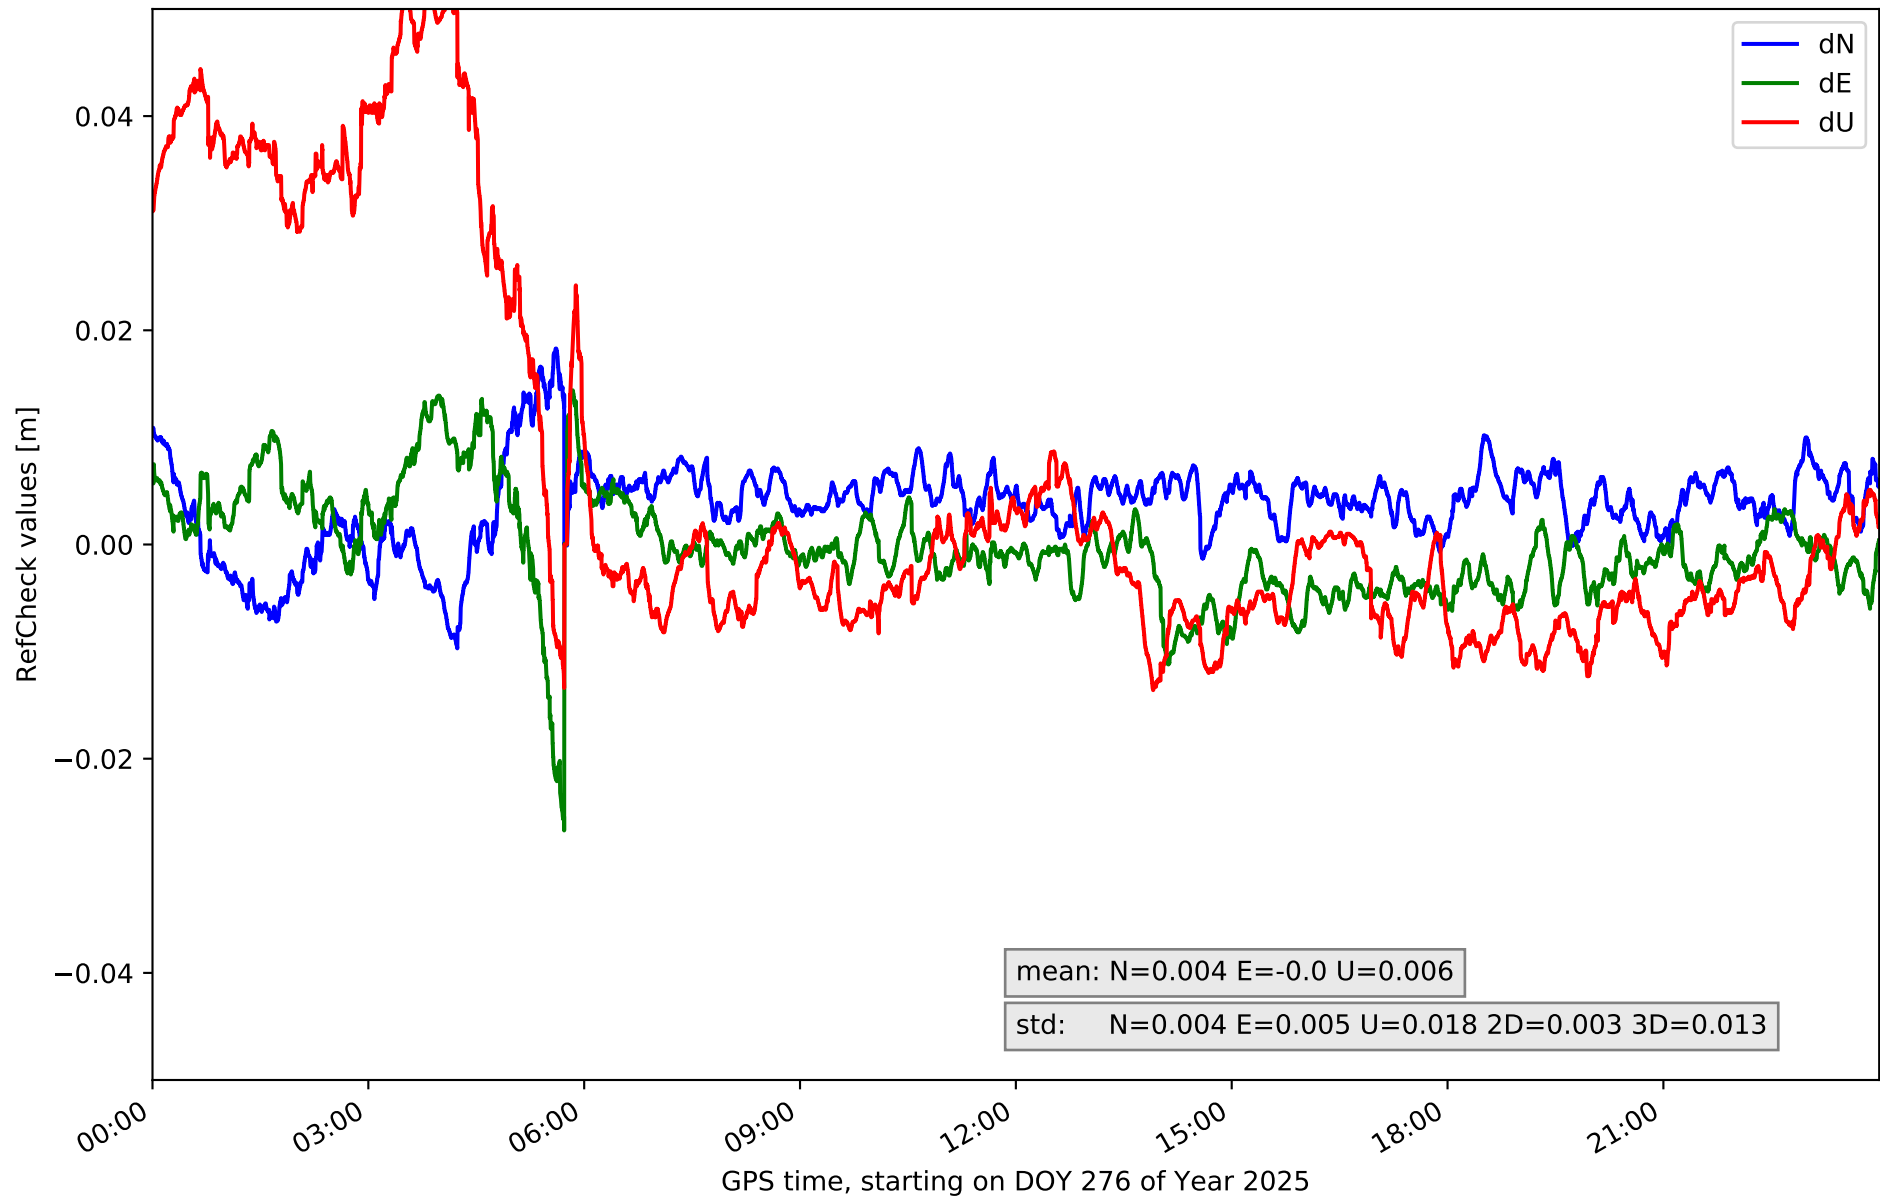


RefCheck for station TN04 in network N32T

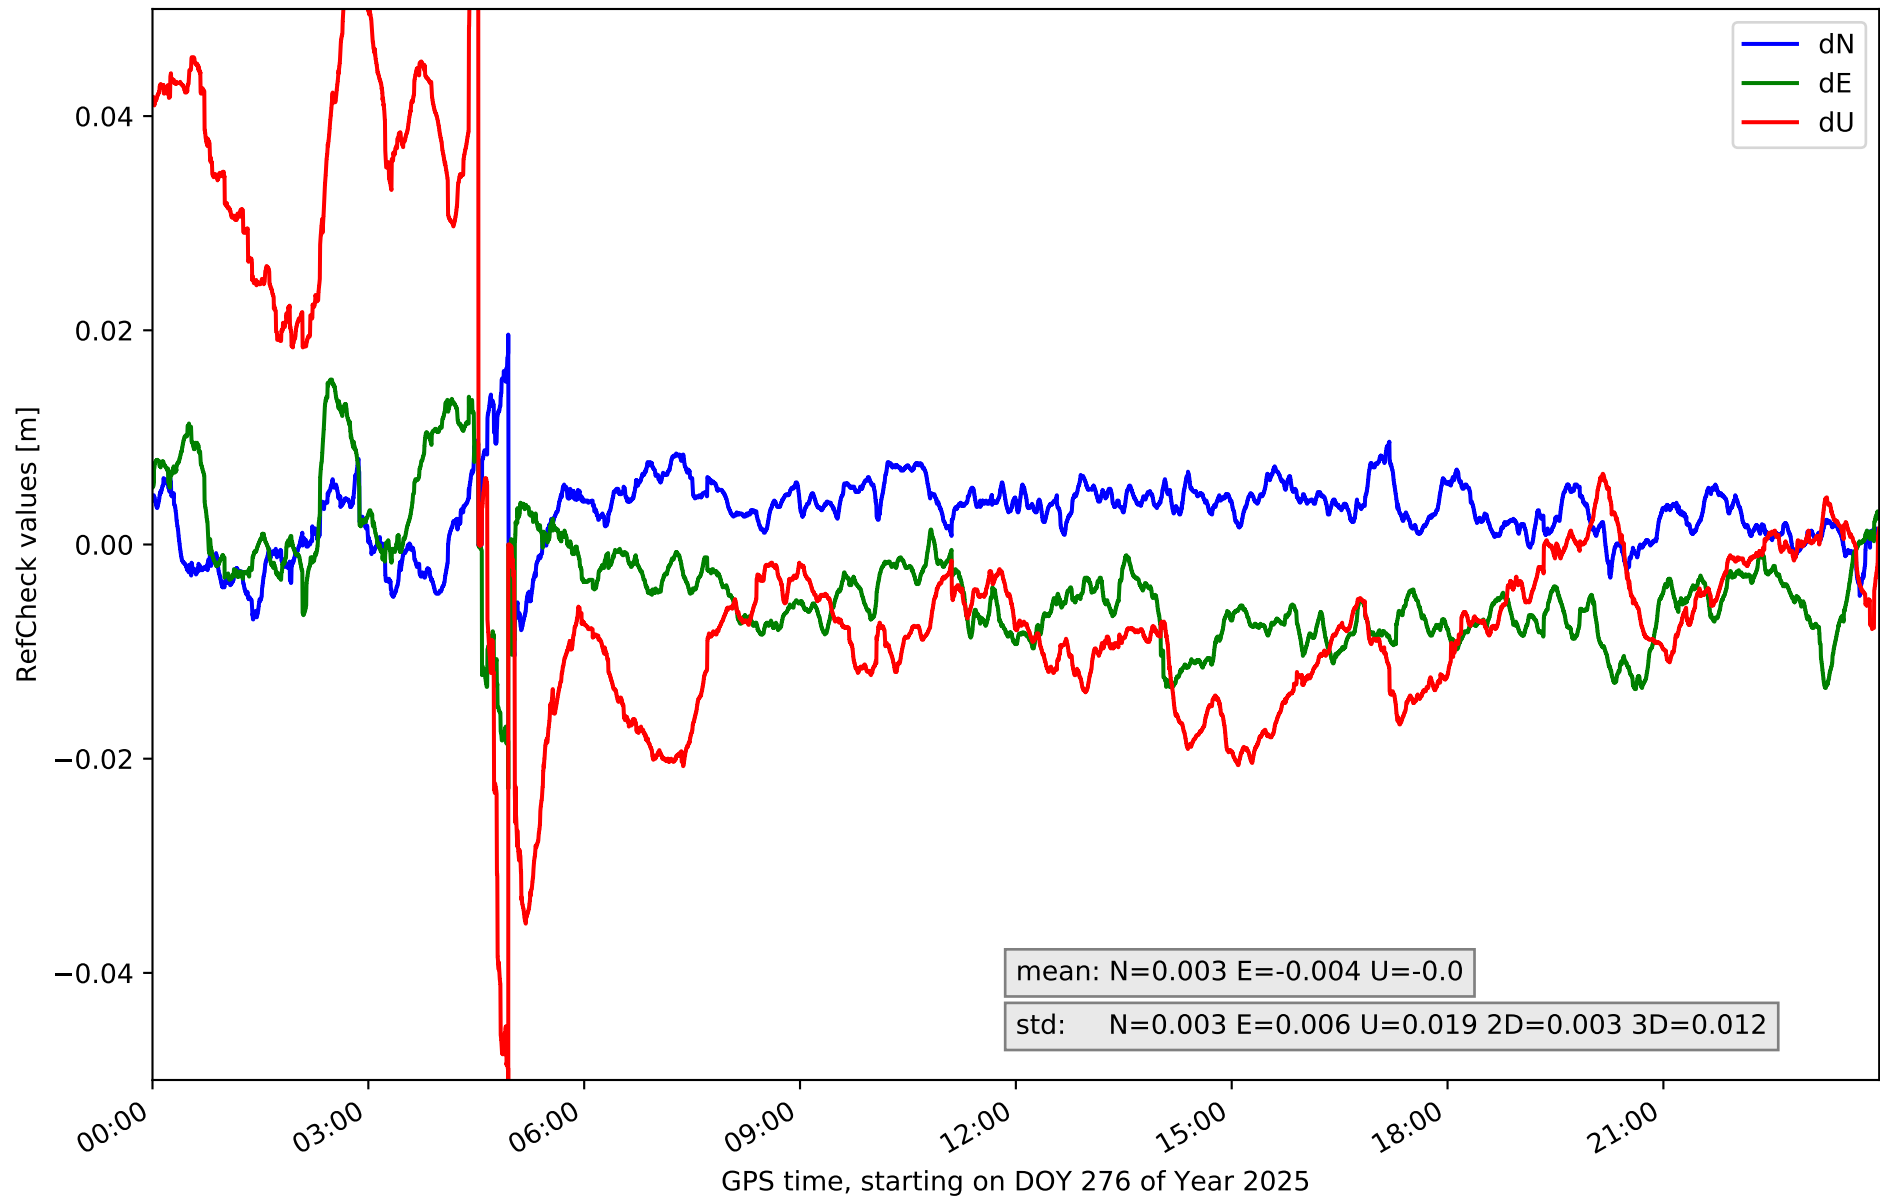

RefCheck for station TN06 in network N32T

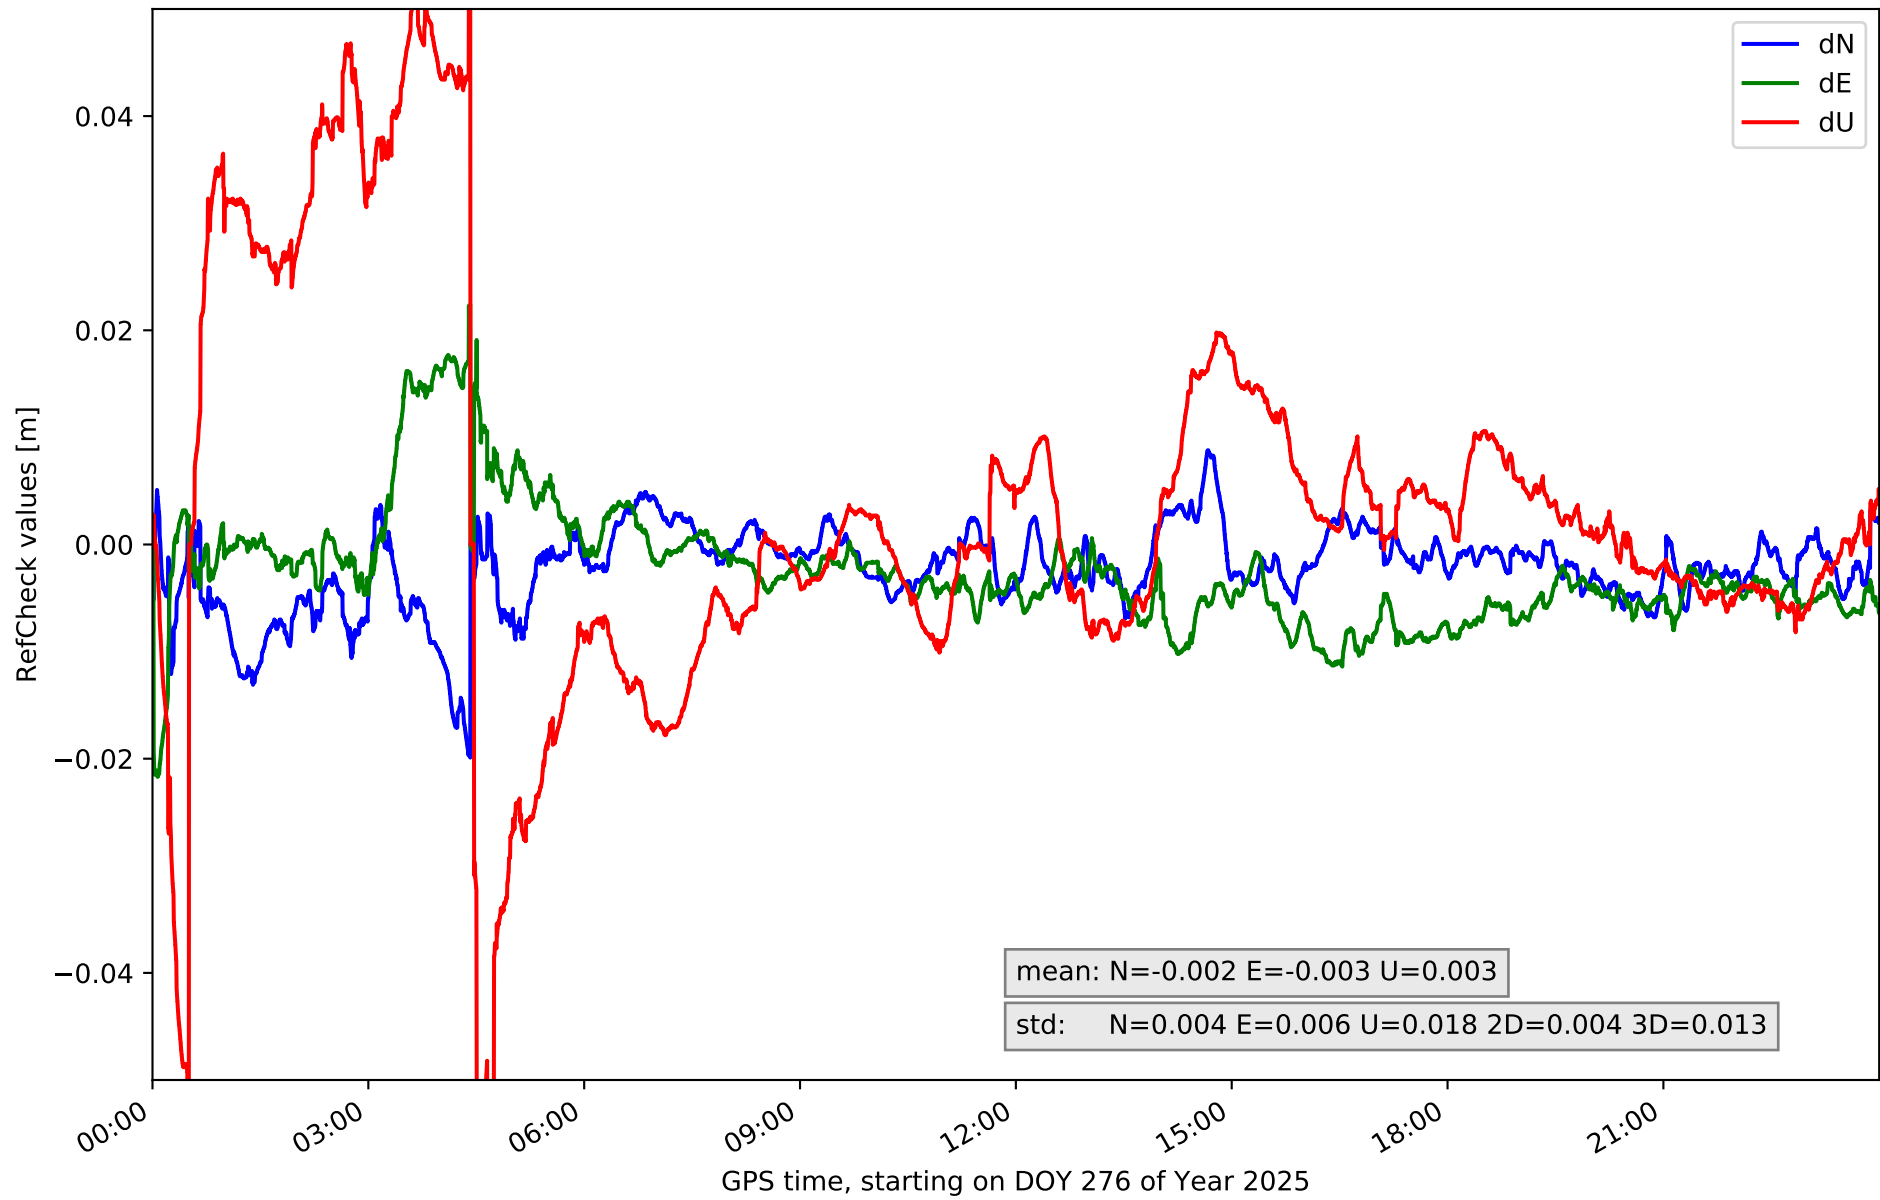

RefCheck for station TE11 in network N32T

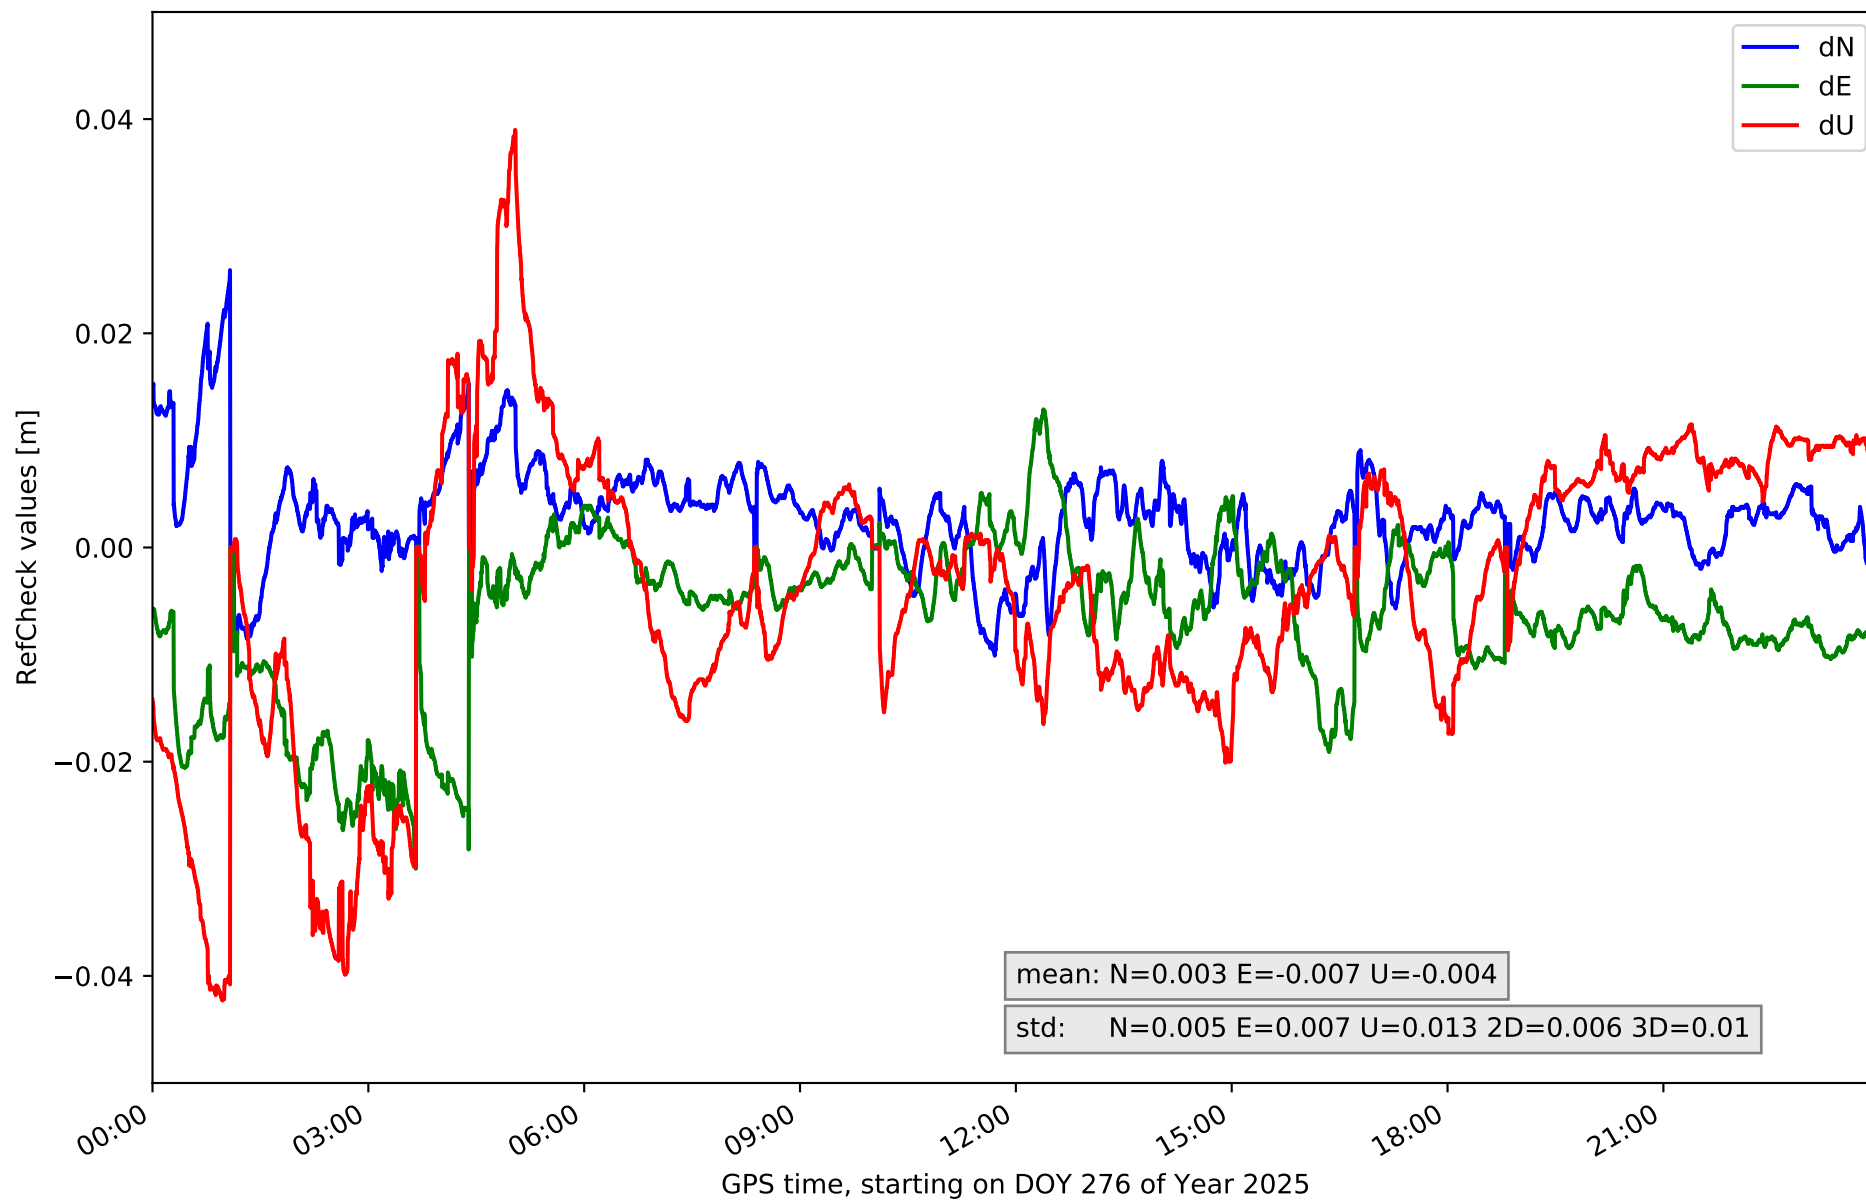

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.017	0.022	0.004	-0.036	0.033	0.006	-0.014	0.04	0.009	0.005	0.007	38928	87.5	10834	24.4
GOM1	-0.029	0.029	0.007	-0.023	0.03	0.007	-0.035	0.013	0.008	0.005	0.006	28272	63.6	6636	14.9
GOME	-0.012	0.025	0.004	-0.026	0.02	0.007	-0.029	0.06	0.014	0.005	0.011	6582	14.8	8726	19.6
IZAN	-0.011	0.013	0.004	-0.028	0.012	0.005	-0.06	0.033	0.014	0.004	0.01	7449	16.7	9274	20.9
LP01	-0.024	0.006	0.005	-0.009	0.018	0.005	-0.013	0.023	0.006	0.004	0.004	30230	68.0	3109	7.0
LP03	-0.009	0.011	0.003	-0.009	0.018	0.005	-0.018	0.031	0.009	0.004	0.006	5419	12.2	4273	9.6
LPAL	-0.029	0.001	0.005	-0.001	0.021	0.004	-0.022	0.032	0.011	0.005	0.006	36459	82.0	11531	25.9
LRES	-0.005	0.029	0.004	-0.024	0.039	0.009	-0.043	0.047	0.013	0.005	0.008	40616	91.3	23695	53.3
TN01	-0.013	0.021	0.006	-0.03	0.006	0.006	-0.043	0.065	0.016	0.005	0.01	23174	52.1	13443	30.2
TN02	-0.022	0.01	0.005	-0.028	0.009	0.008	-0.059	0.061	0.021	0.007	0.013	17287	38.9	21056	47.3
TN03	-0.01	0.018	0.004	-0.027	0.014	0.005	-0.014	0.052	0.018	0.003	0.013	5384	12.1	10577	23.8
TN04	-0.01	0.02	0.003	-0.023	0.015	0.006	-0.06	0.06	0.019	0.003	0.012	8141	18.3	12080	27.2
TN06	-0.02	0.009	0.004	-0.022	0.022	0.006	-0.062	0.057	0.018	0.004	0.013	4997	11.2	9887	22.2
TE11	-0.01	0.026	0.005	-0.03	0.013	0.007	-0.042	0.039	0.013	0.006	0.01	12278	27.6	7894	17.7
Mean	-0.016	0.017	0.005	-0.023	0.019	0.006	-0.037	0.044	0.013	0.005	0.009	18944.0	42.6	10929.6	24.6
Min/Max	-0.029	0.029	0.007	-0.036	0.039	0.009	-0.062	0.065	0.021	0.007	0.013	40616	91.3	23695	53.3

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	85.2	87.7	81.3	86.8	83.1
considering satellites with dual-frequency fixed	80.1	81.3	73.8	82.5	80.6
considering all signals separately	80.2	80.4	73.8	83.0	80.1