

summary for network N32T

timeperiod chosen: from 2025-10-18-00:00:00 until 2025-10-18-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.2 seconds


average fixing percentage with threshold set to 0.3: 79.2 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

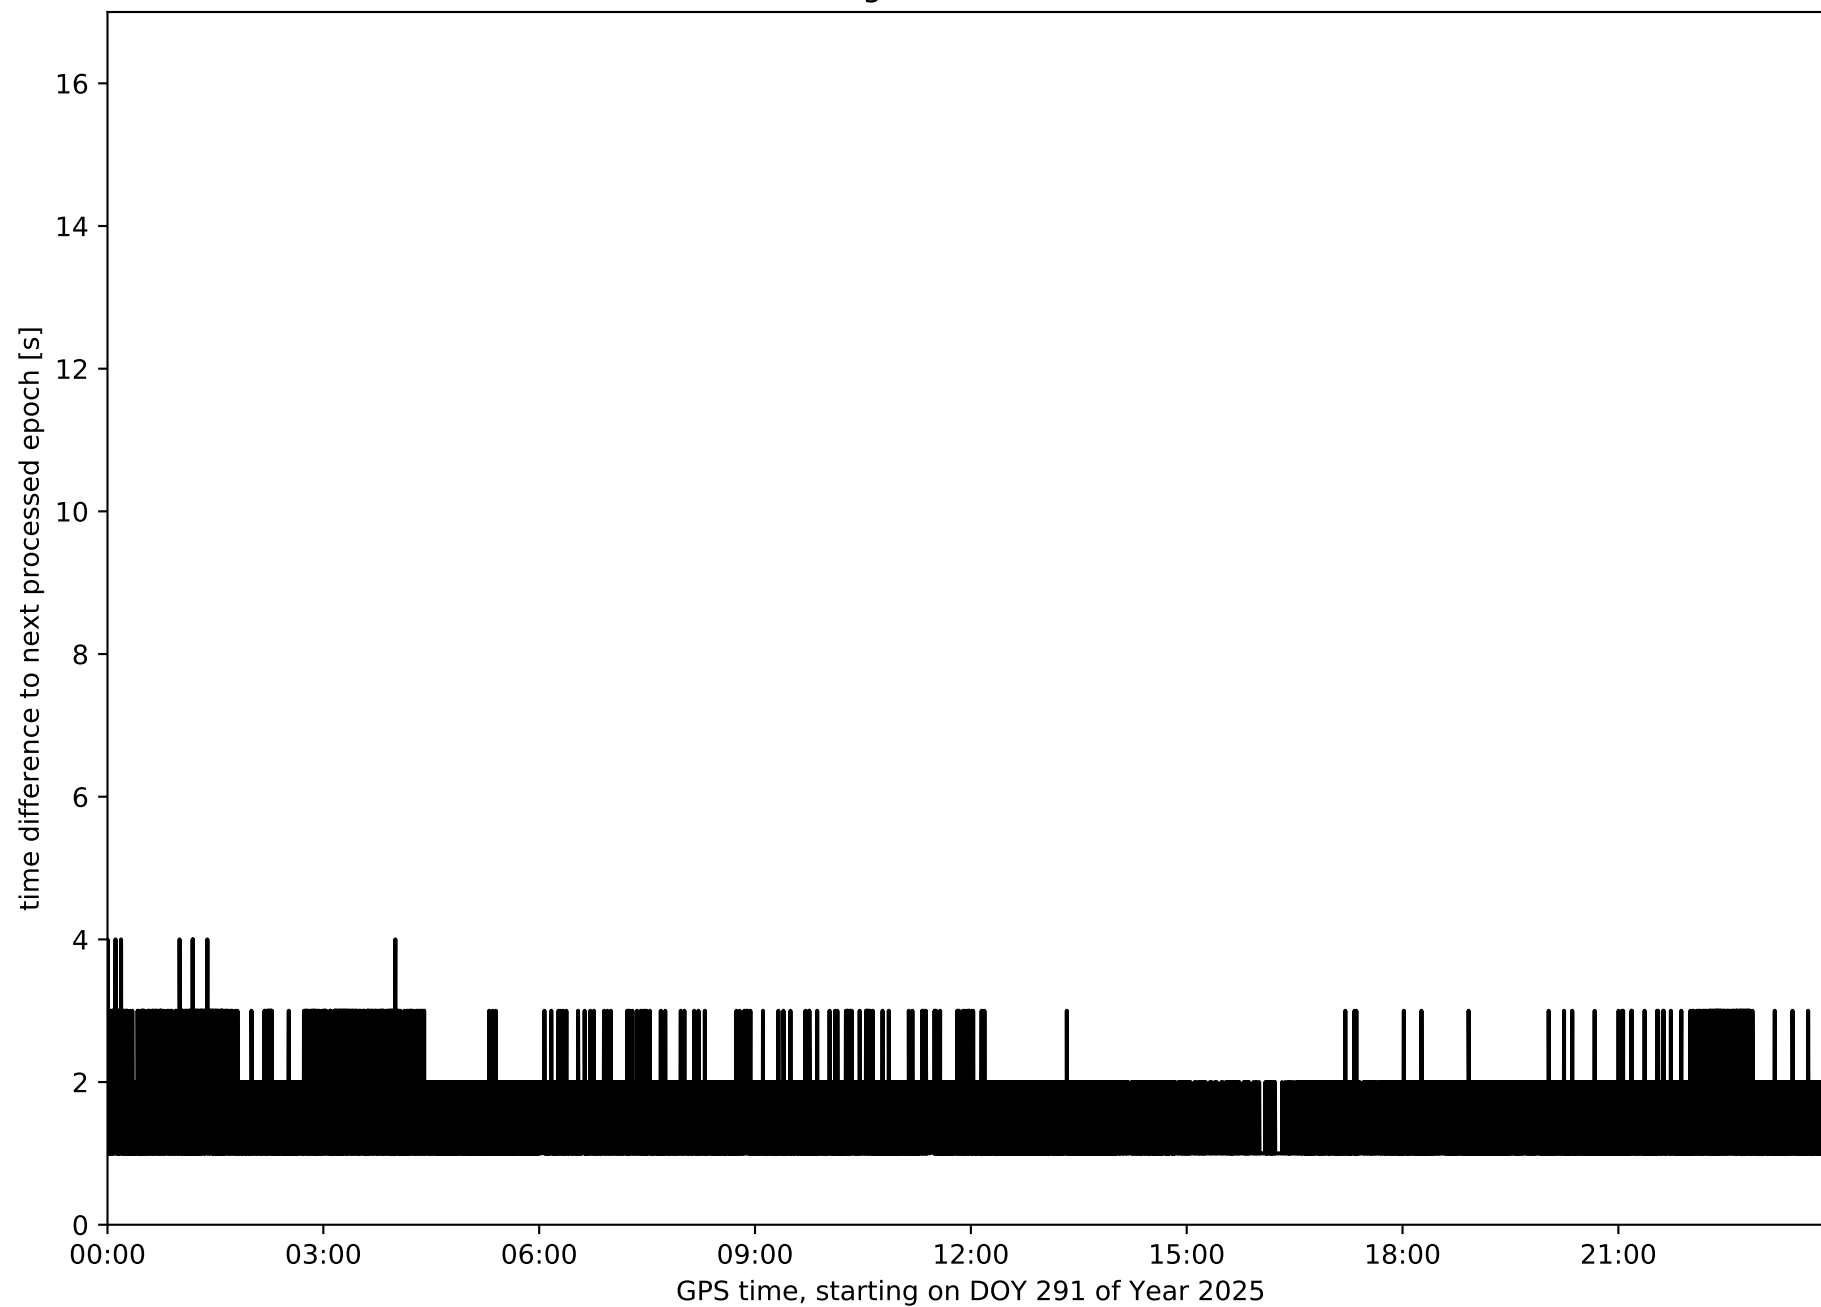


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

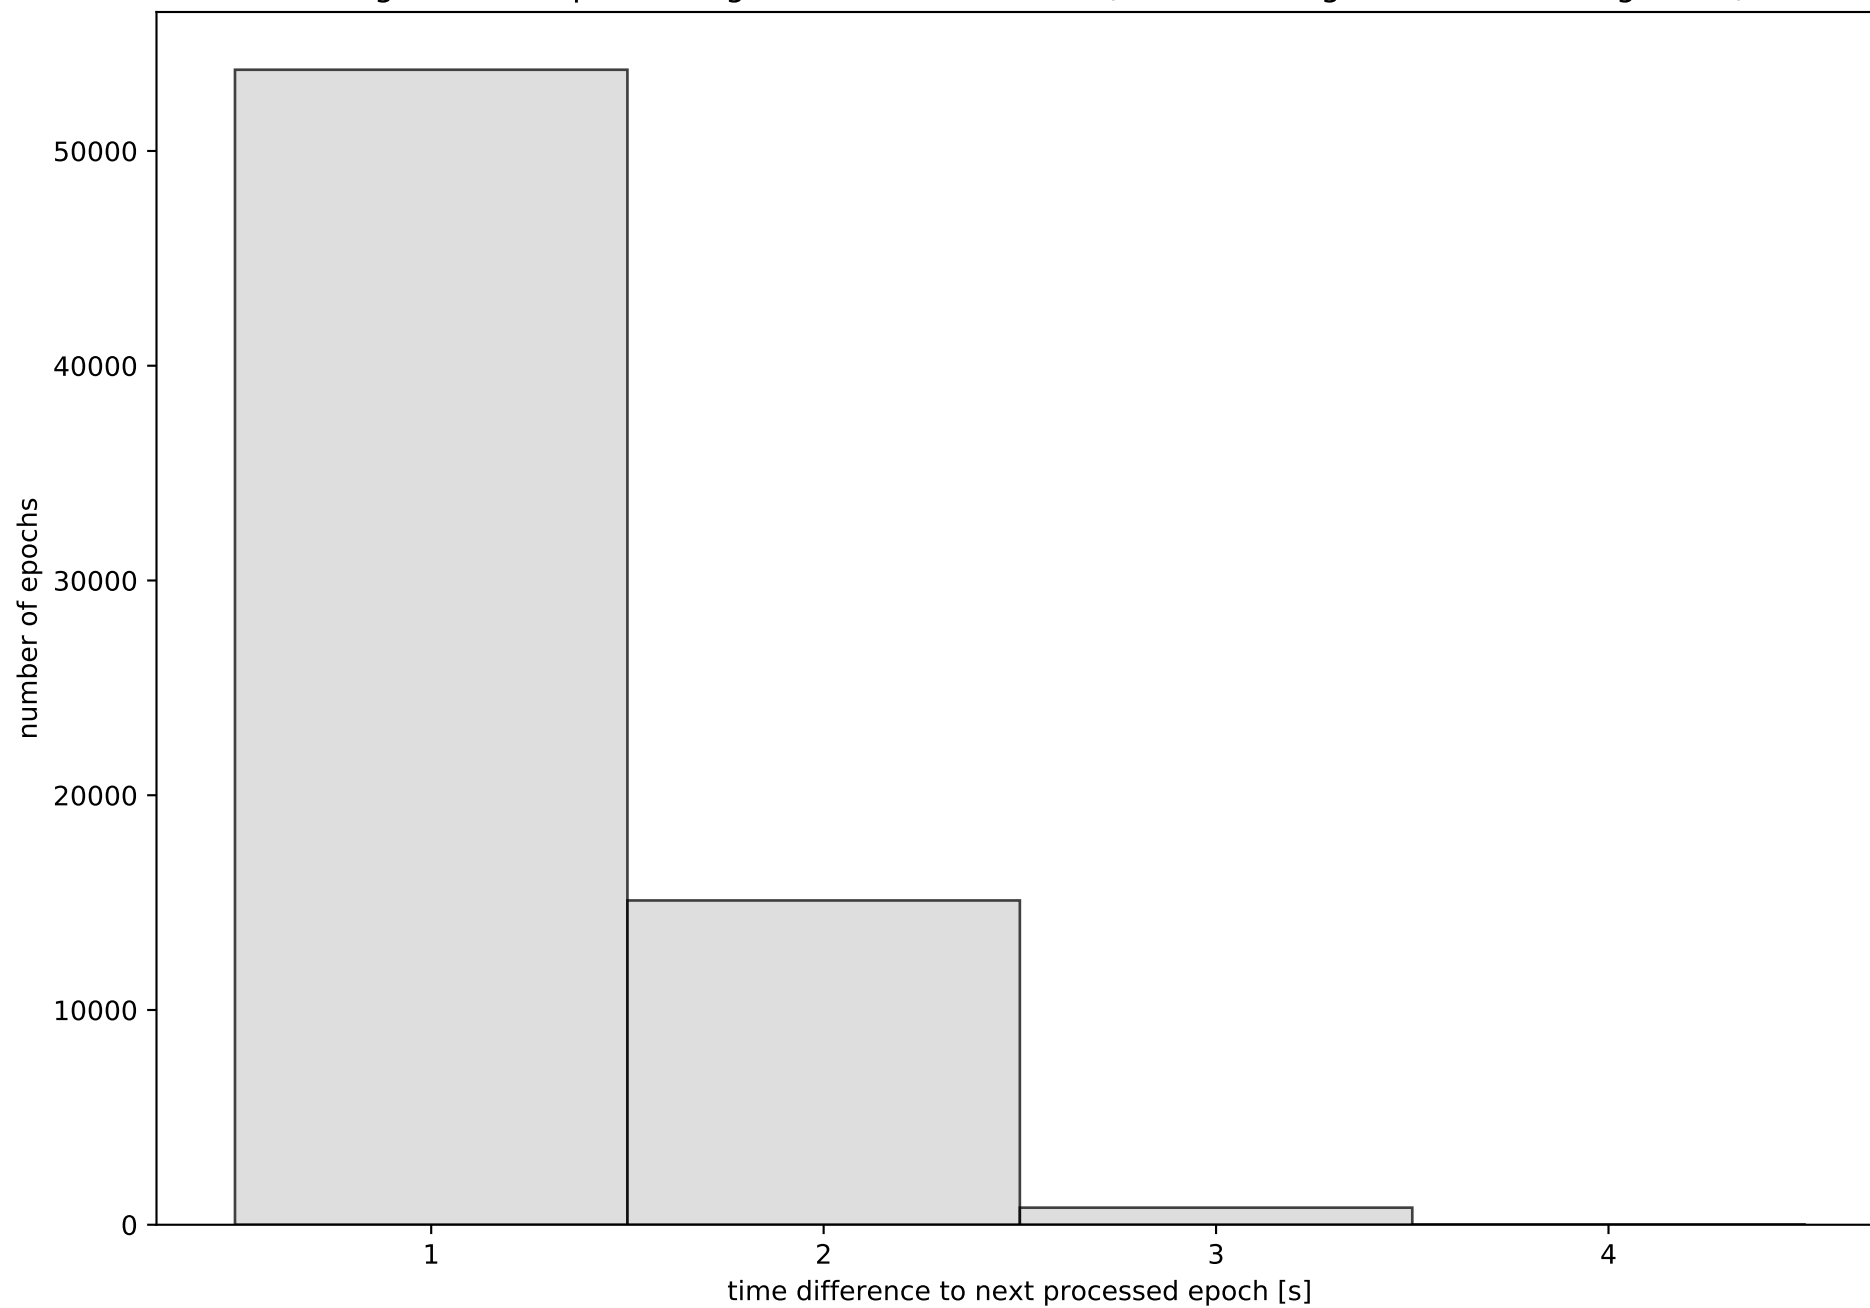


Network N32T with threshold set to 0.3

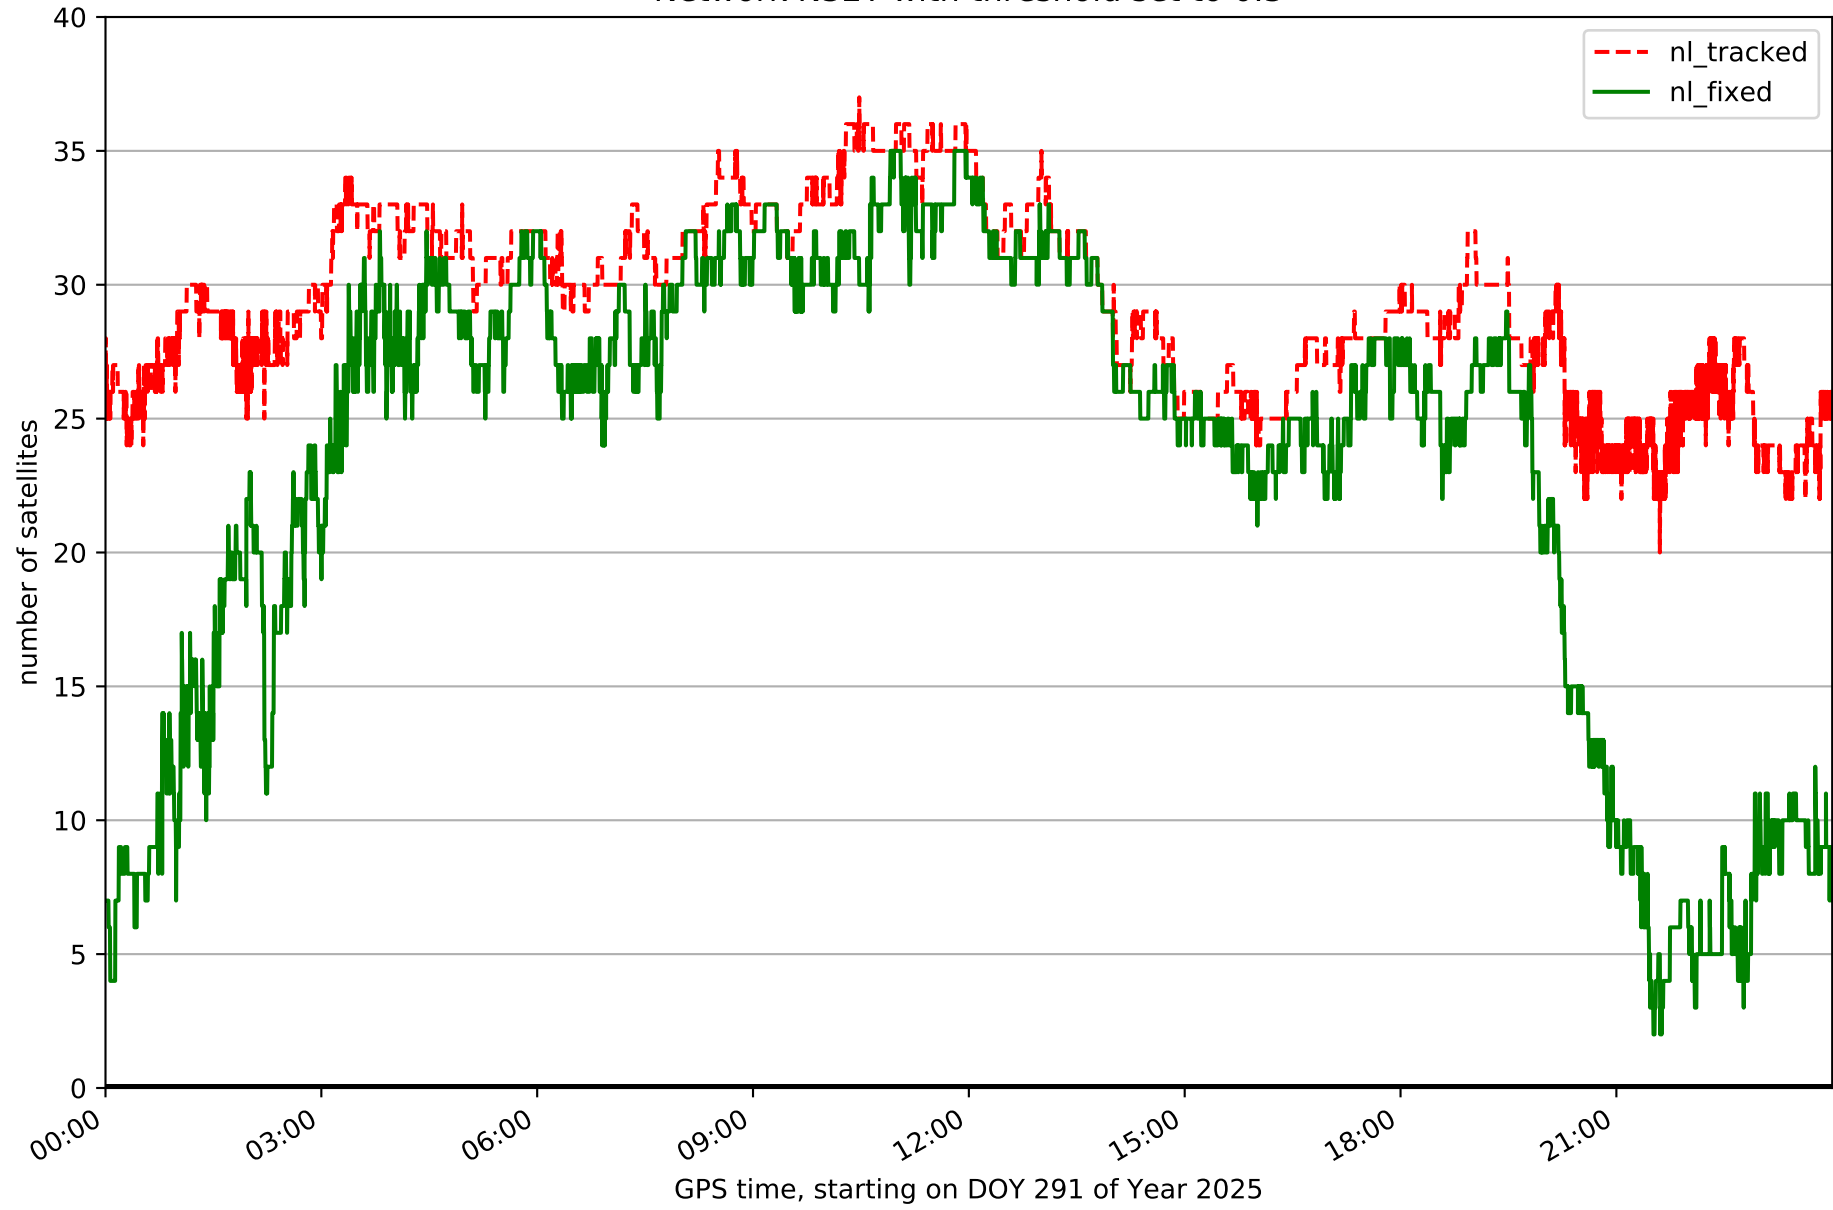


Fixing percentage of satellites in network N32T with threshold set to 0.3

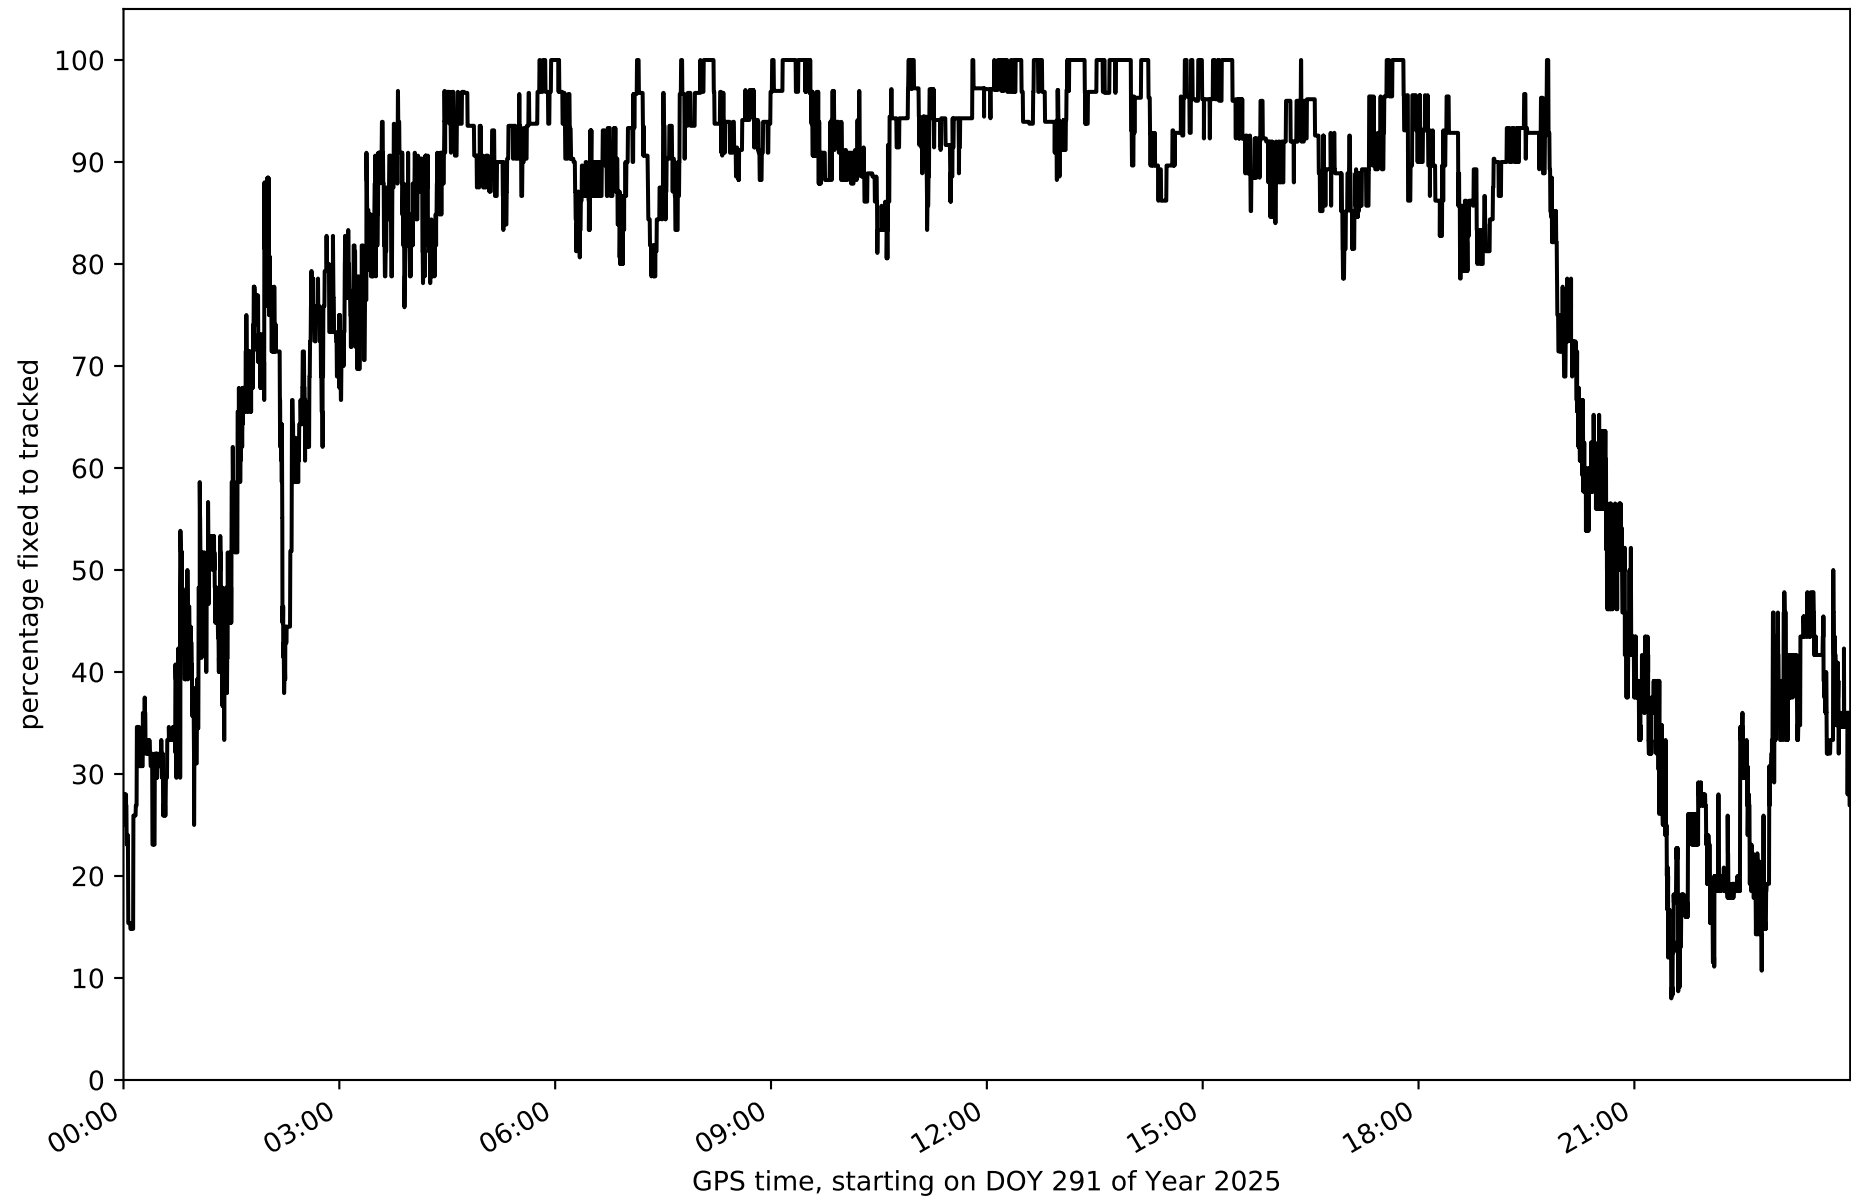


Network N32T - only GPS with threshold set to 0.3

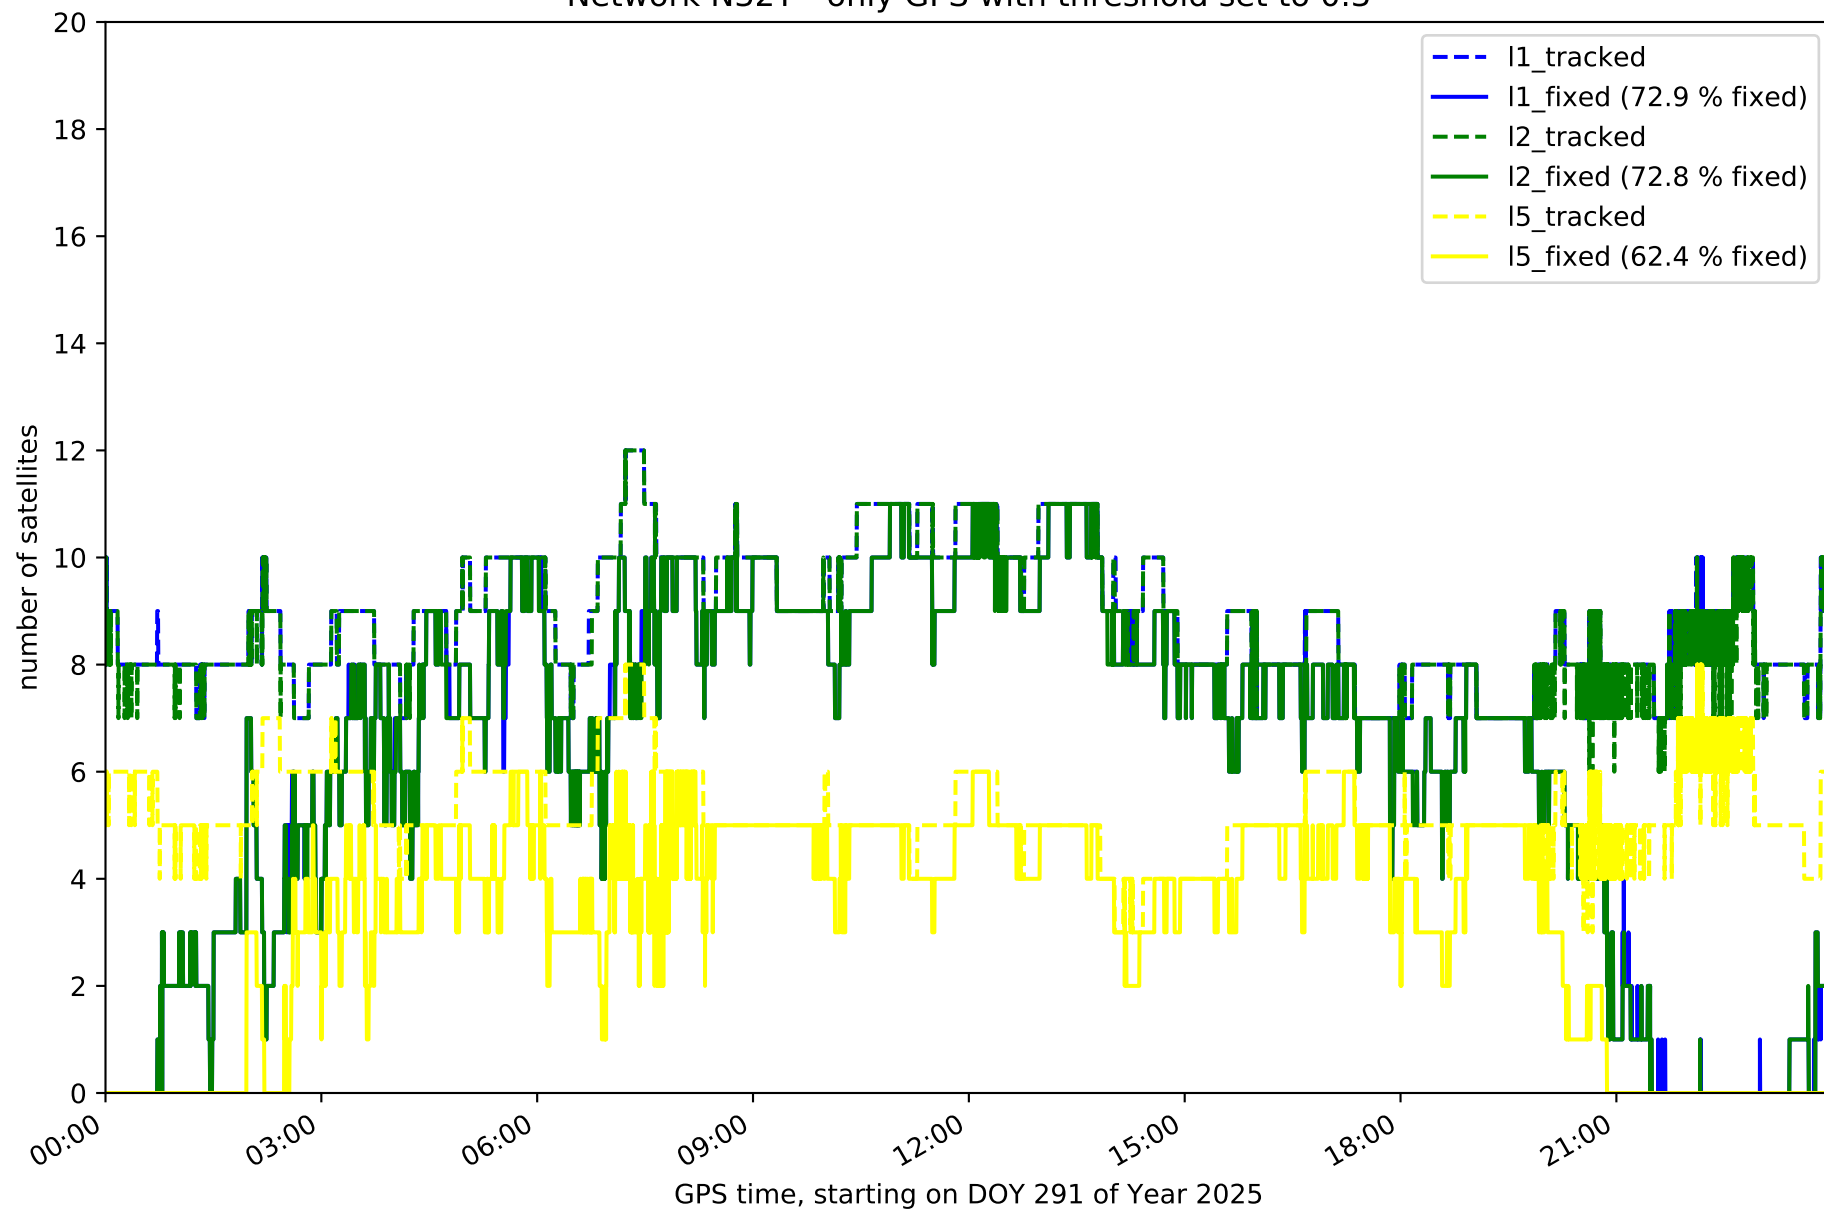


Network N32T - only GLONASS with threshold set to 0.3

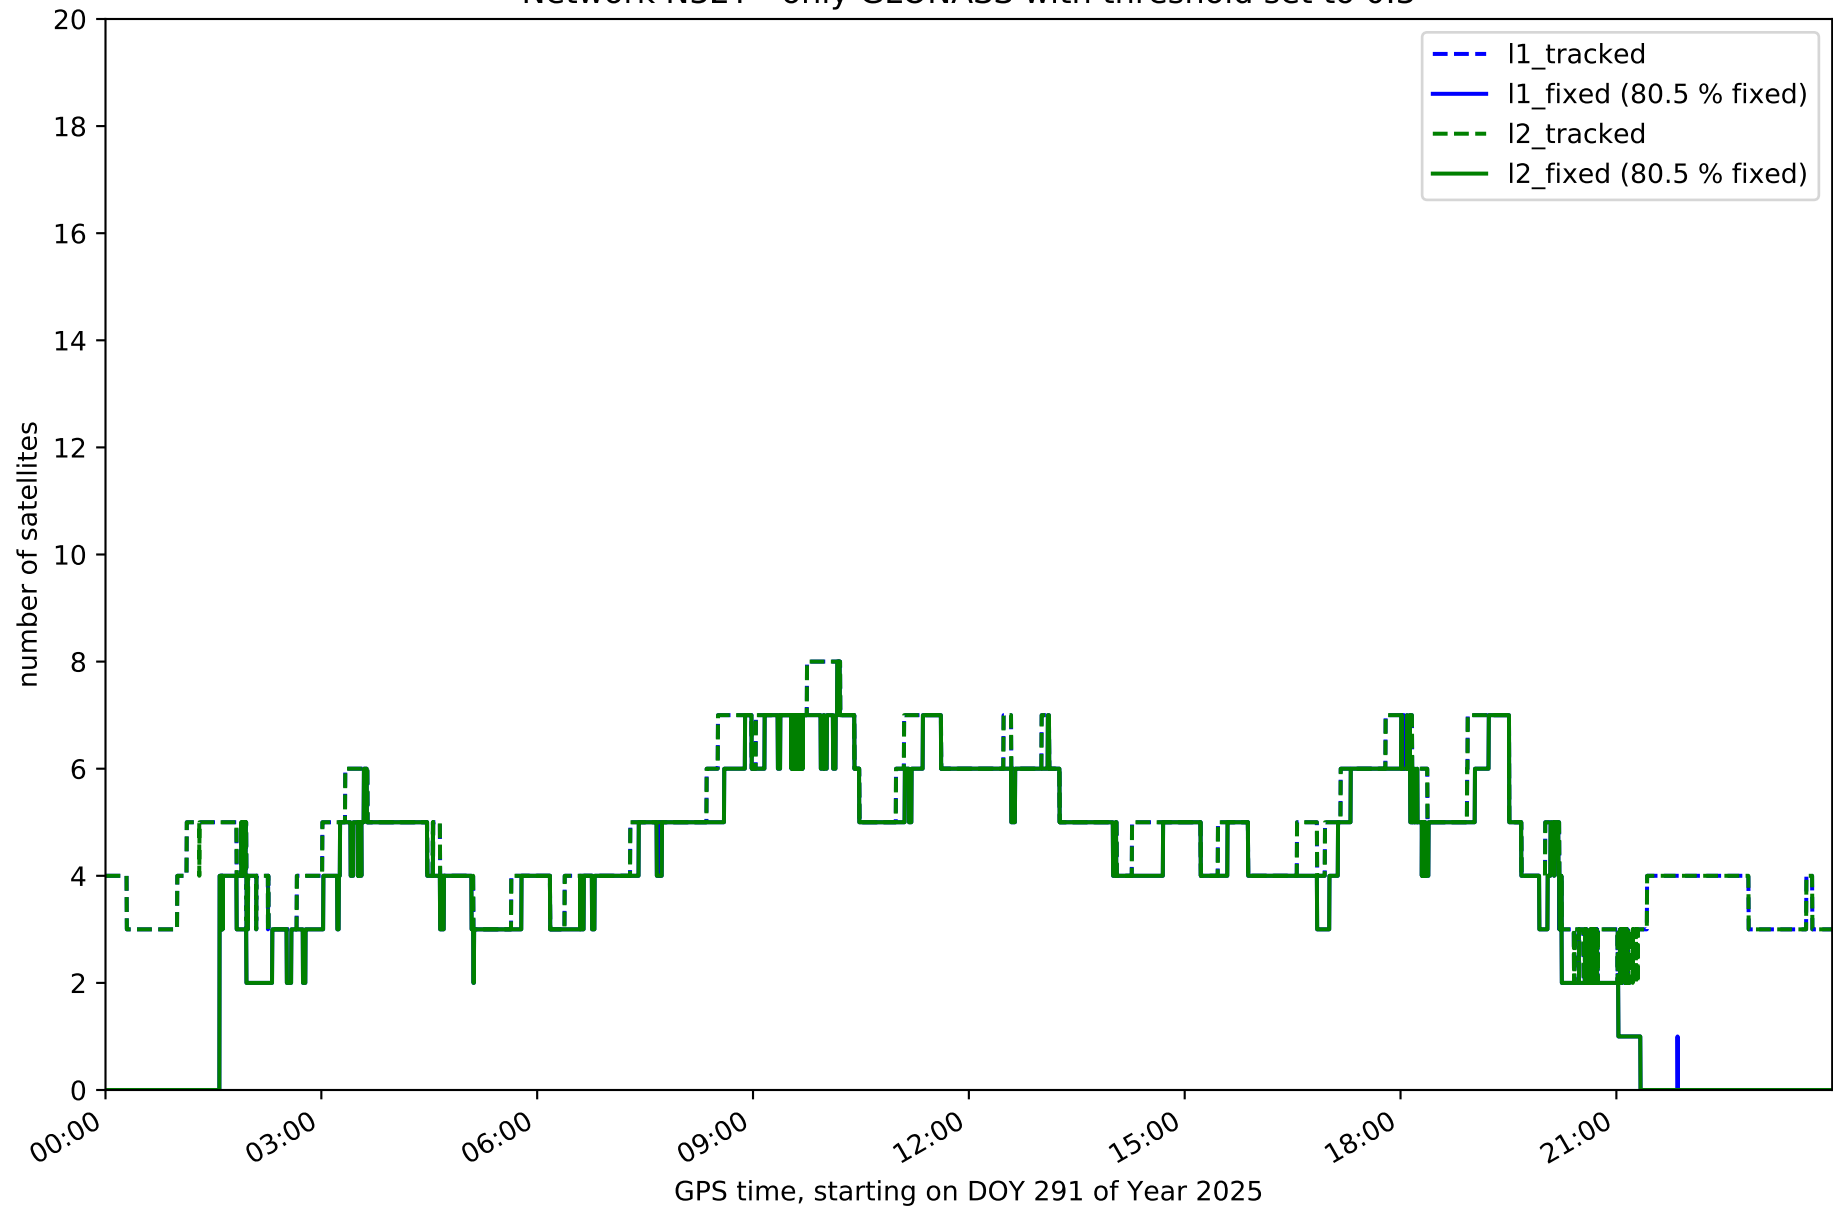


Network N32T - only BDS with threshold set to 0.3

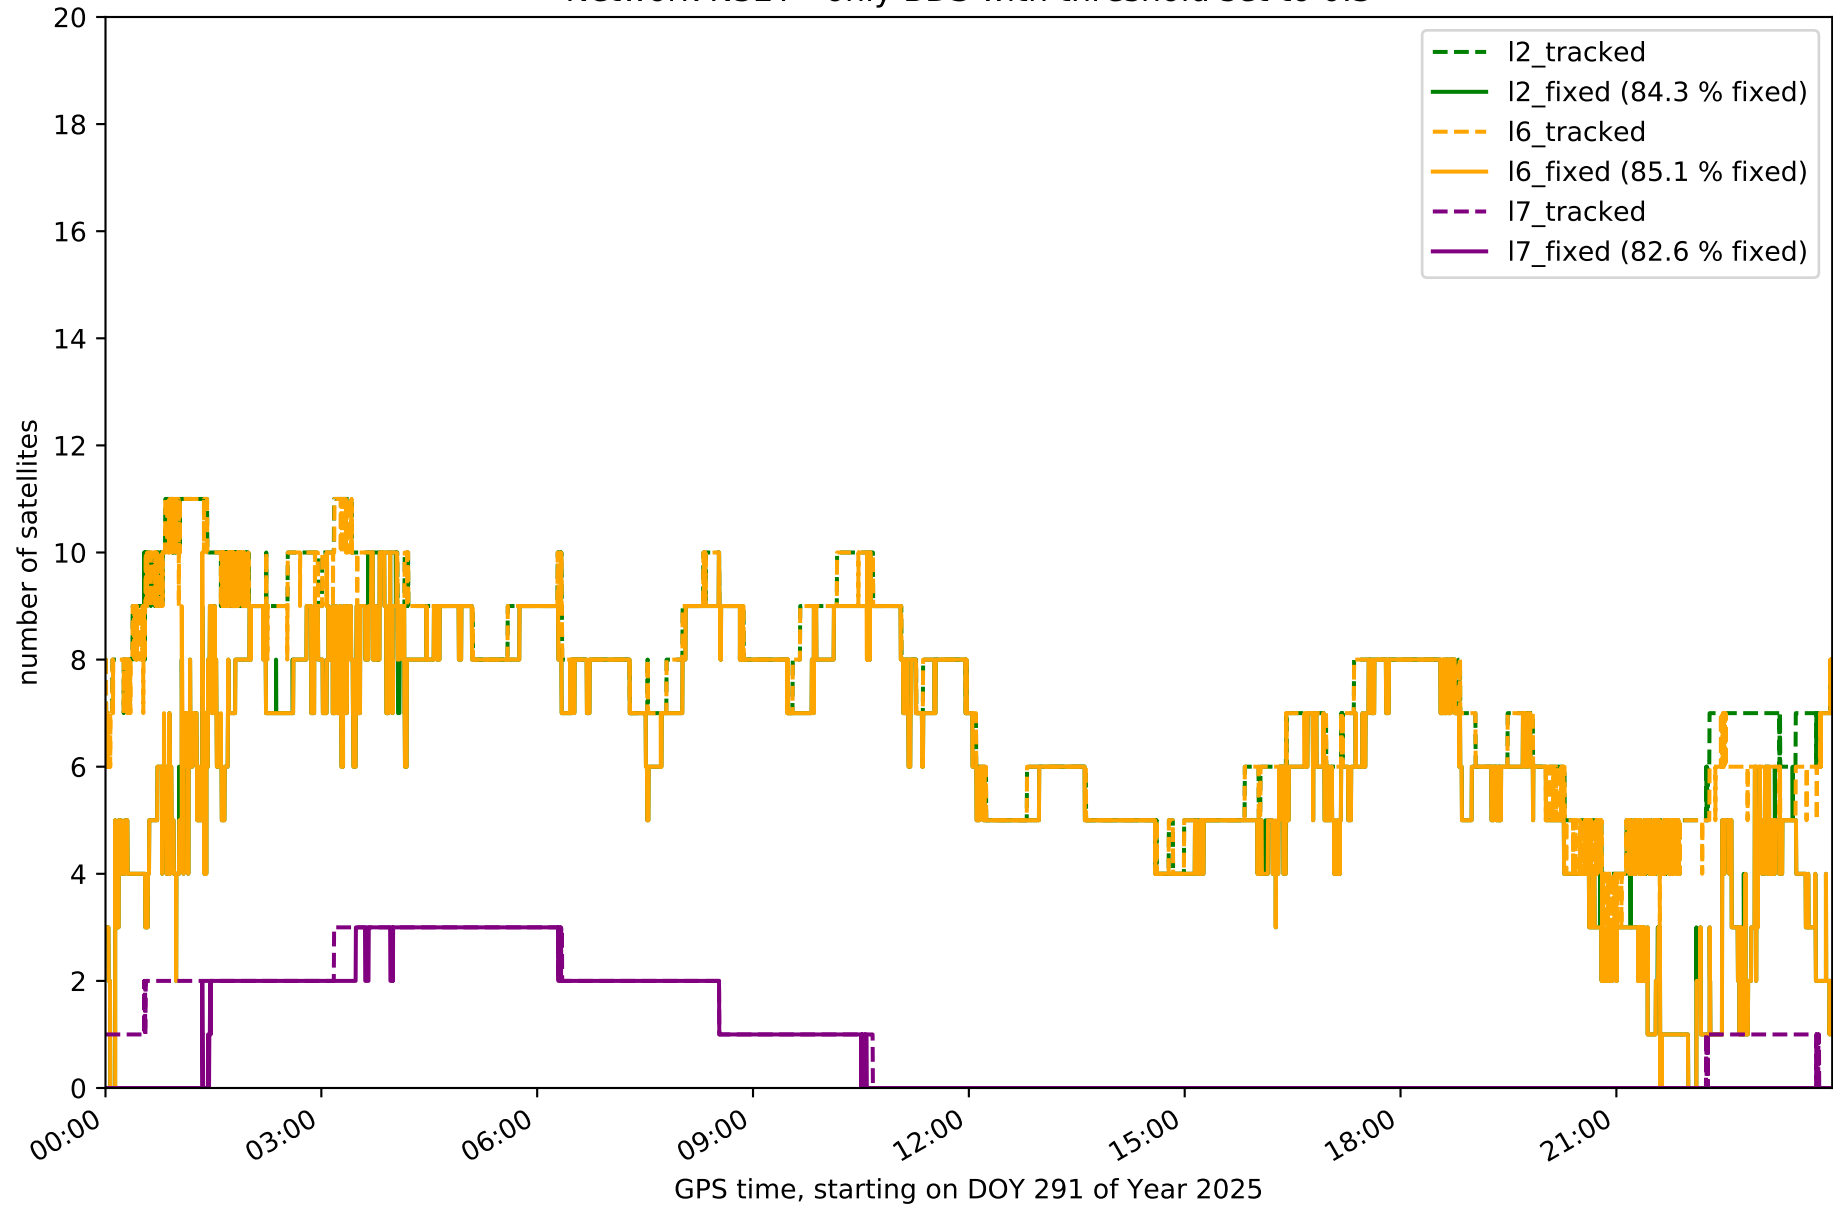


Network N32T - only Galileo with threshold set to 0.3

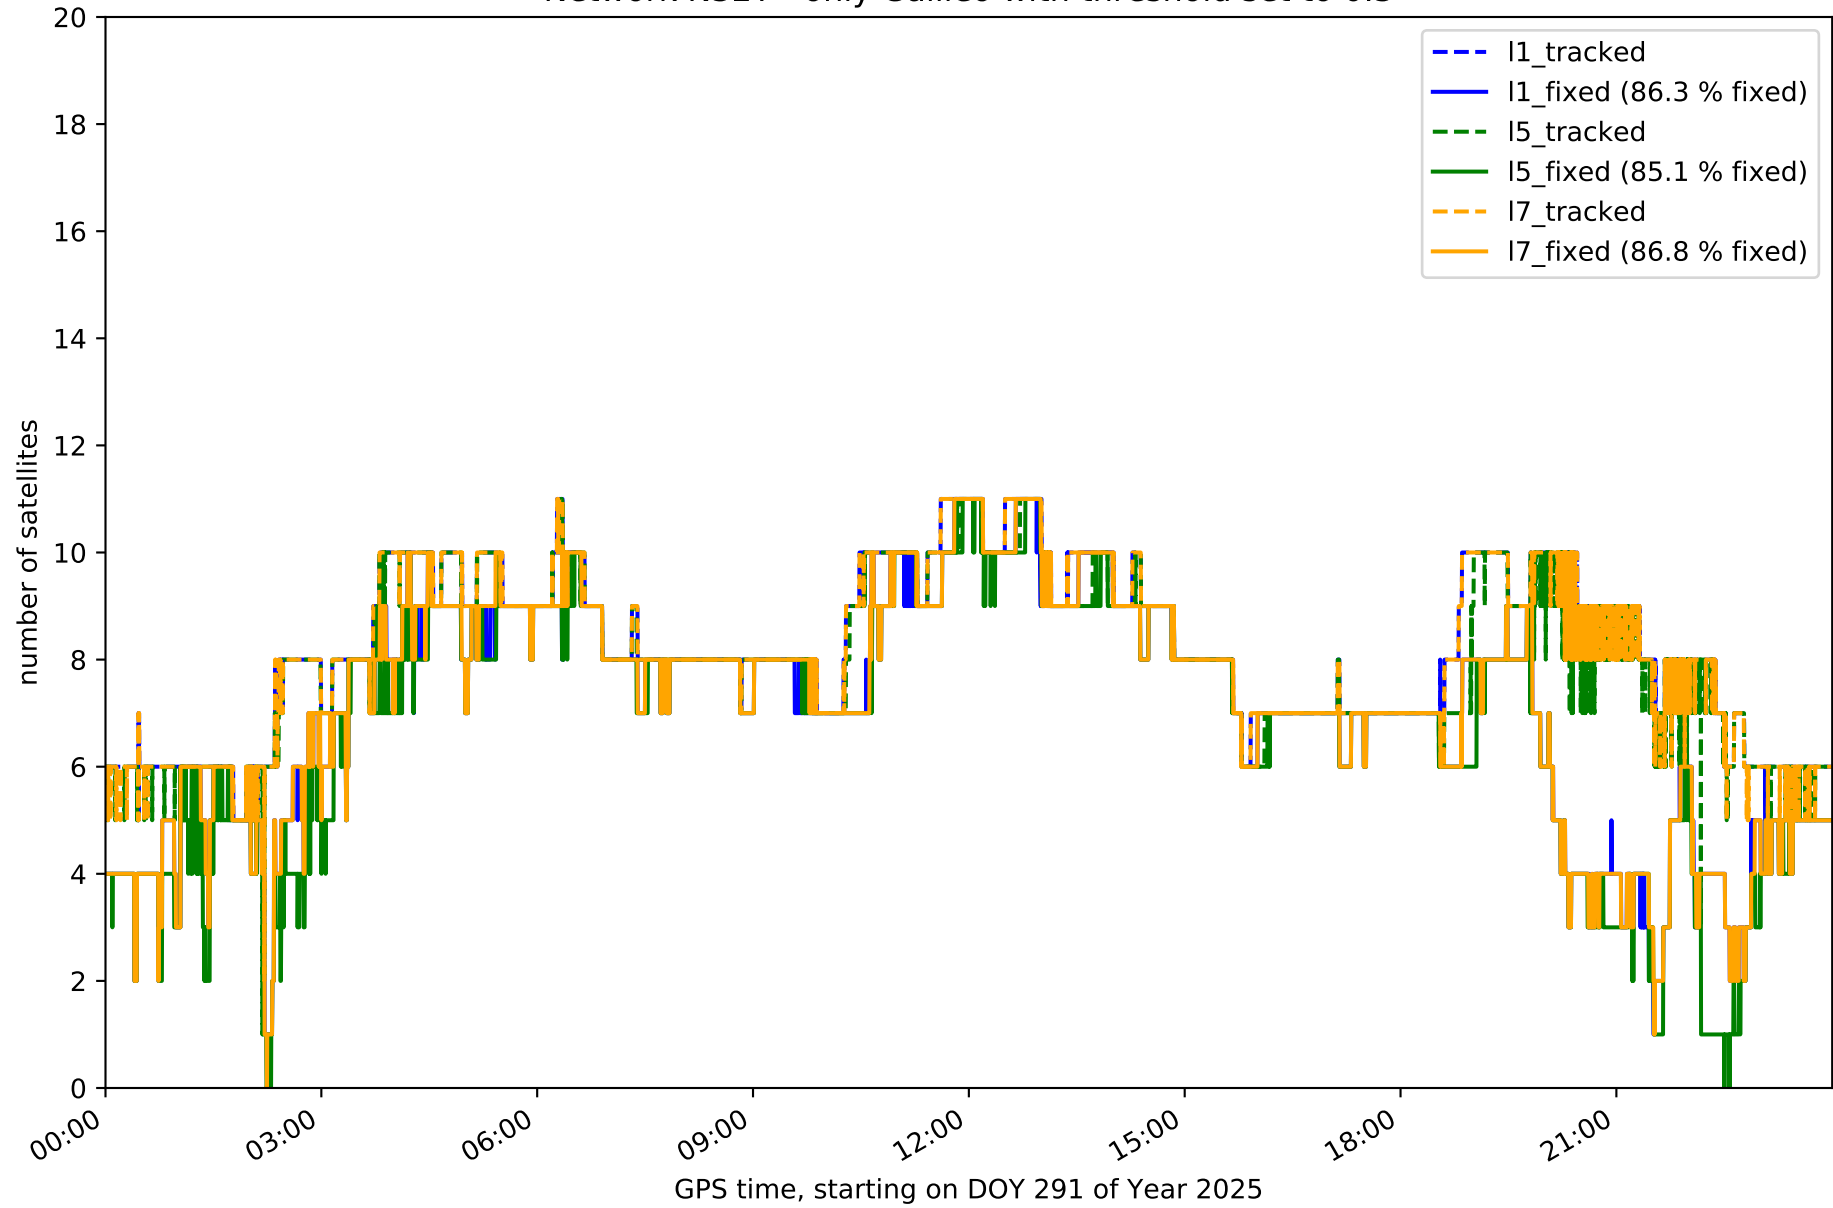


Station EH01 in network N32T

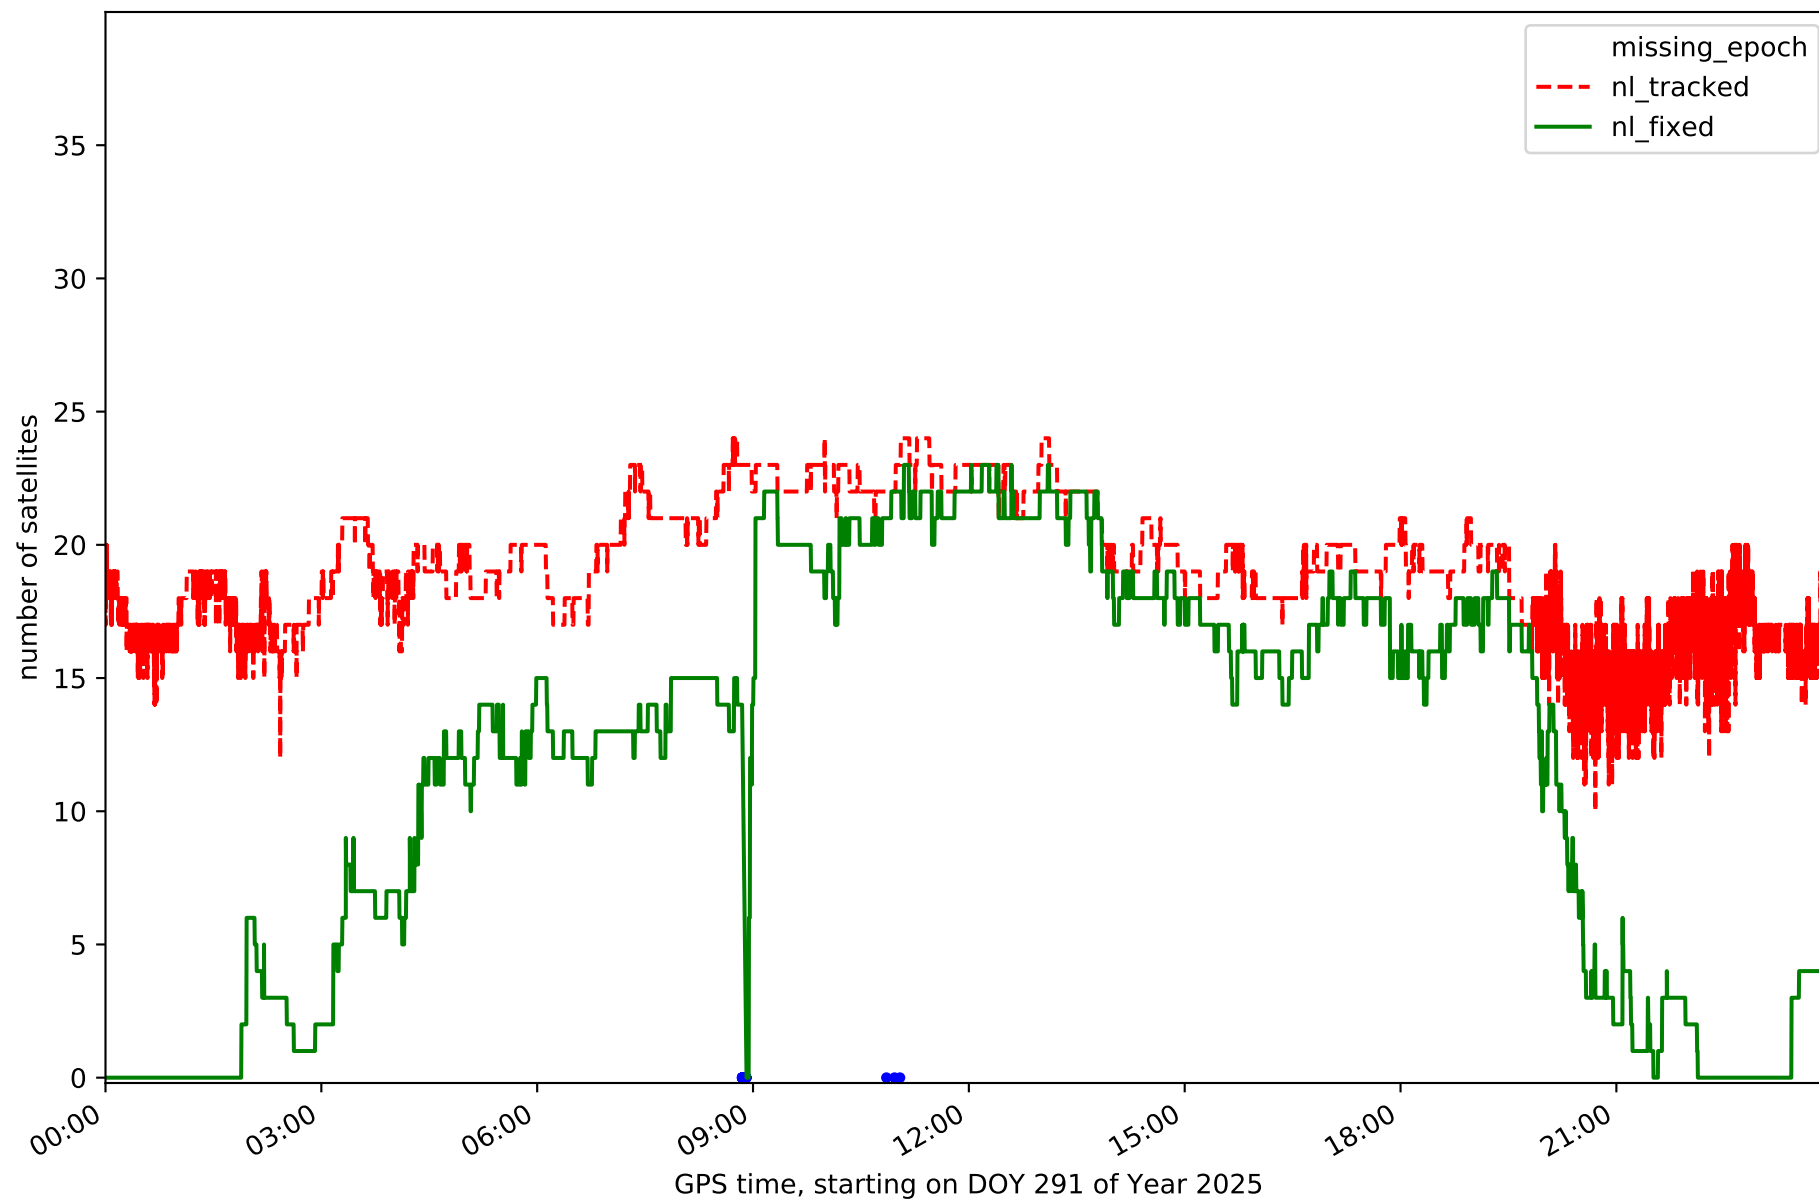


Station GOM1 in network N32T

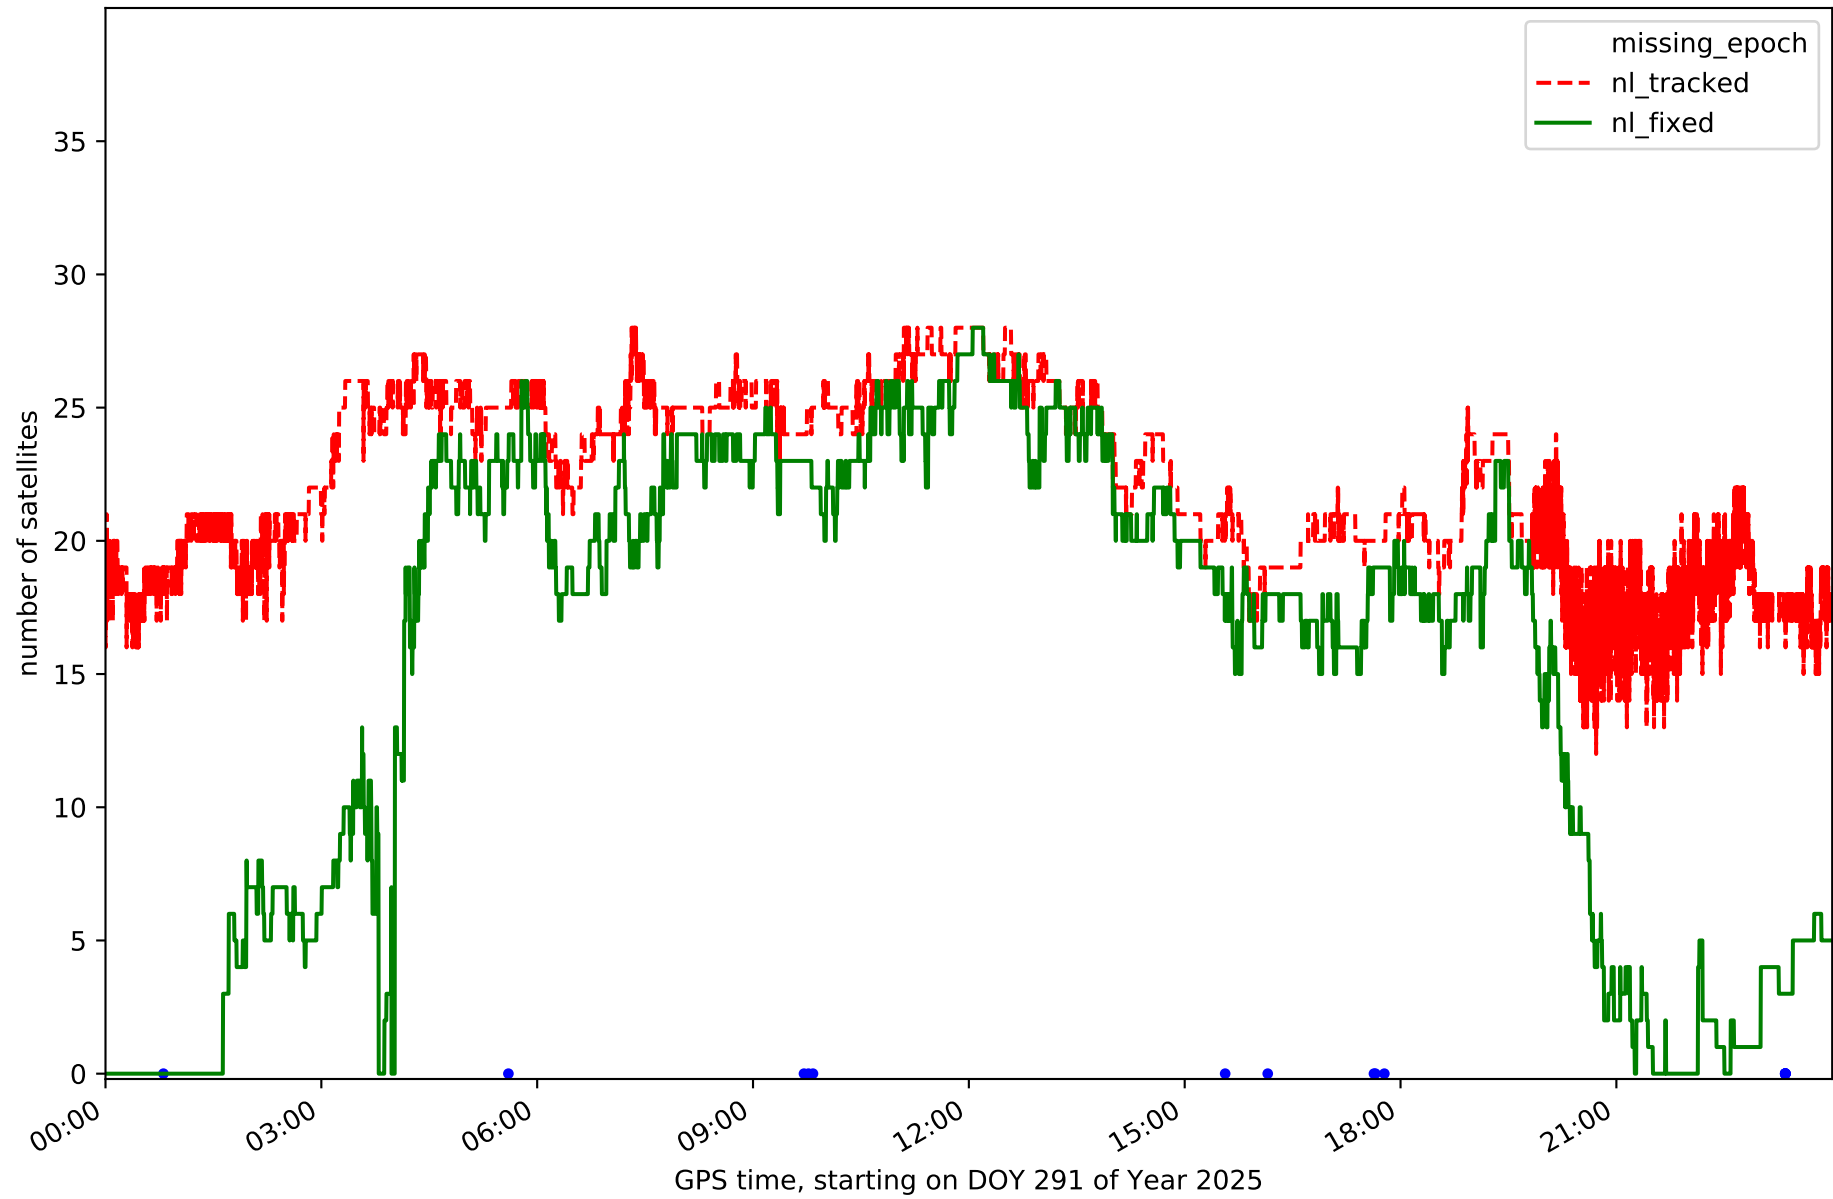


Station GOME in network N32T

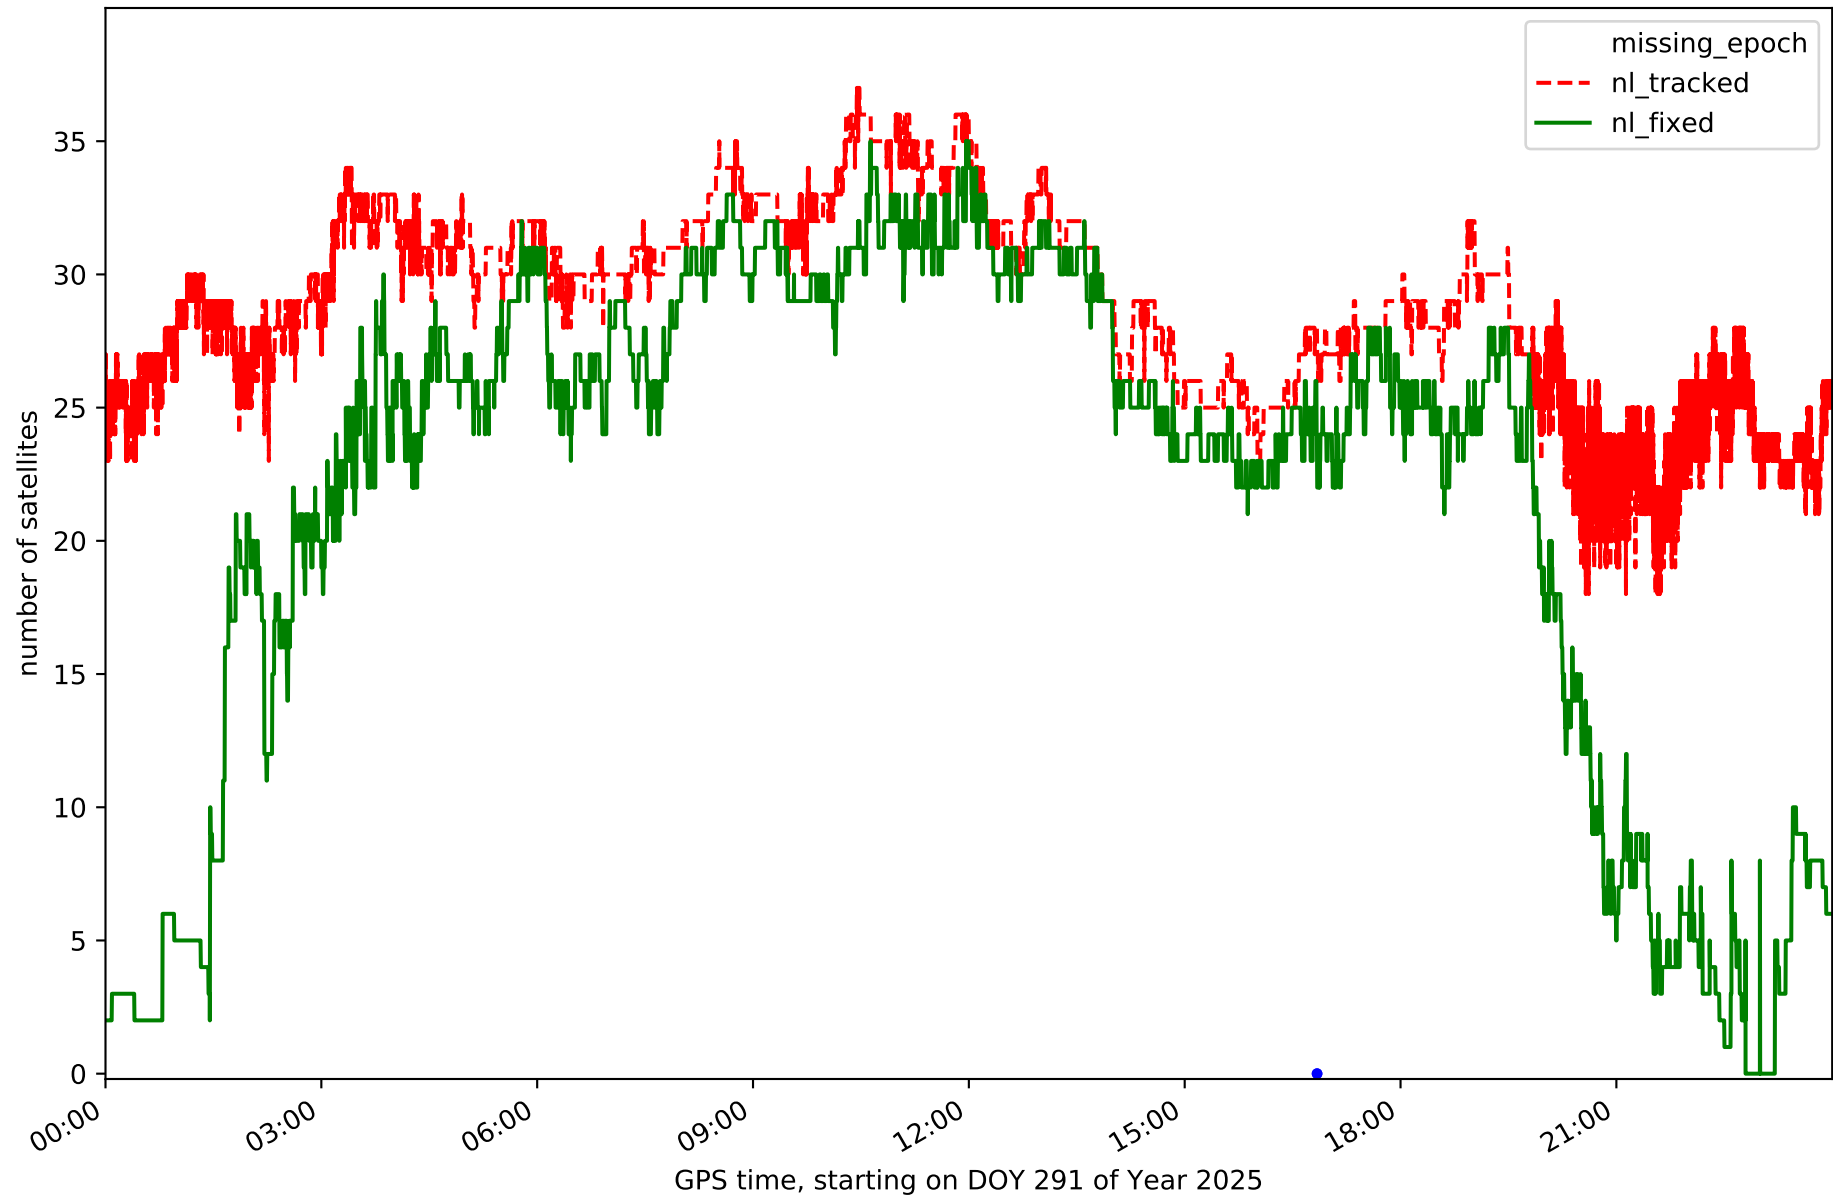


Station IZAN in network N32T

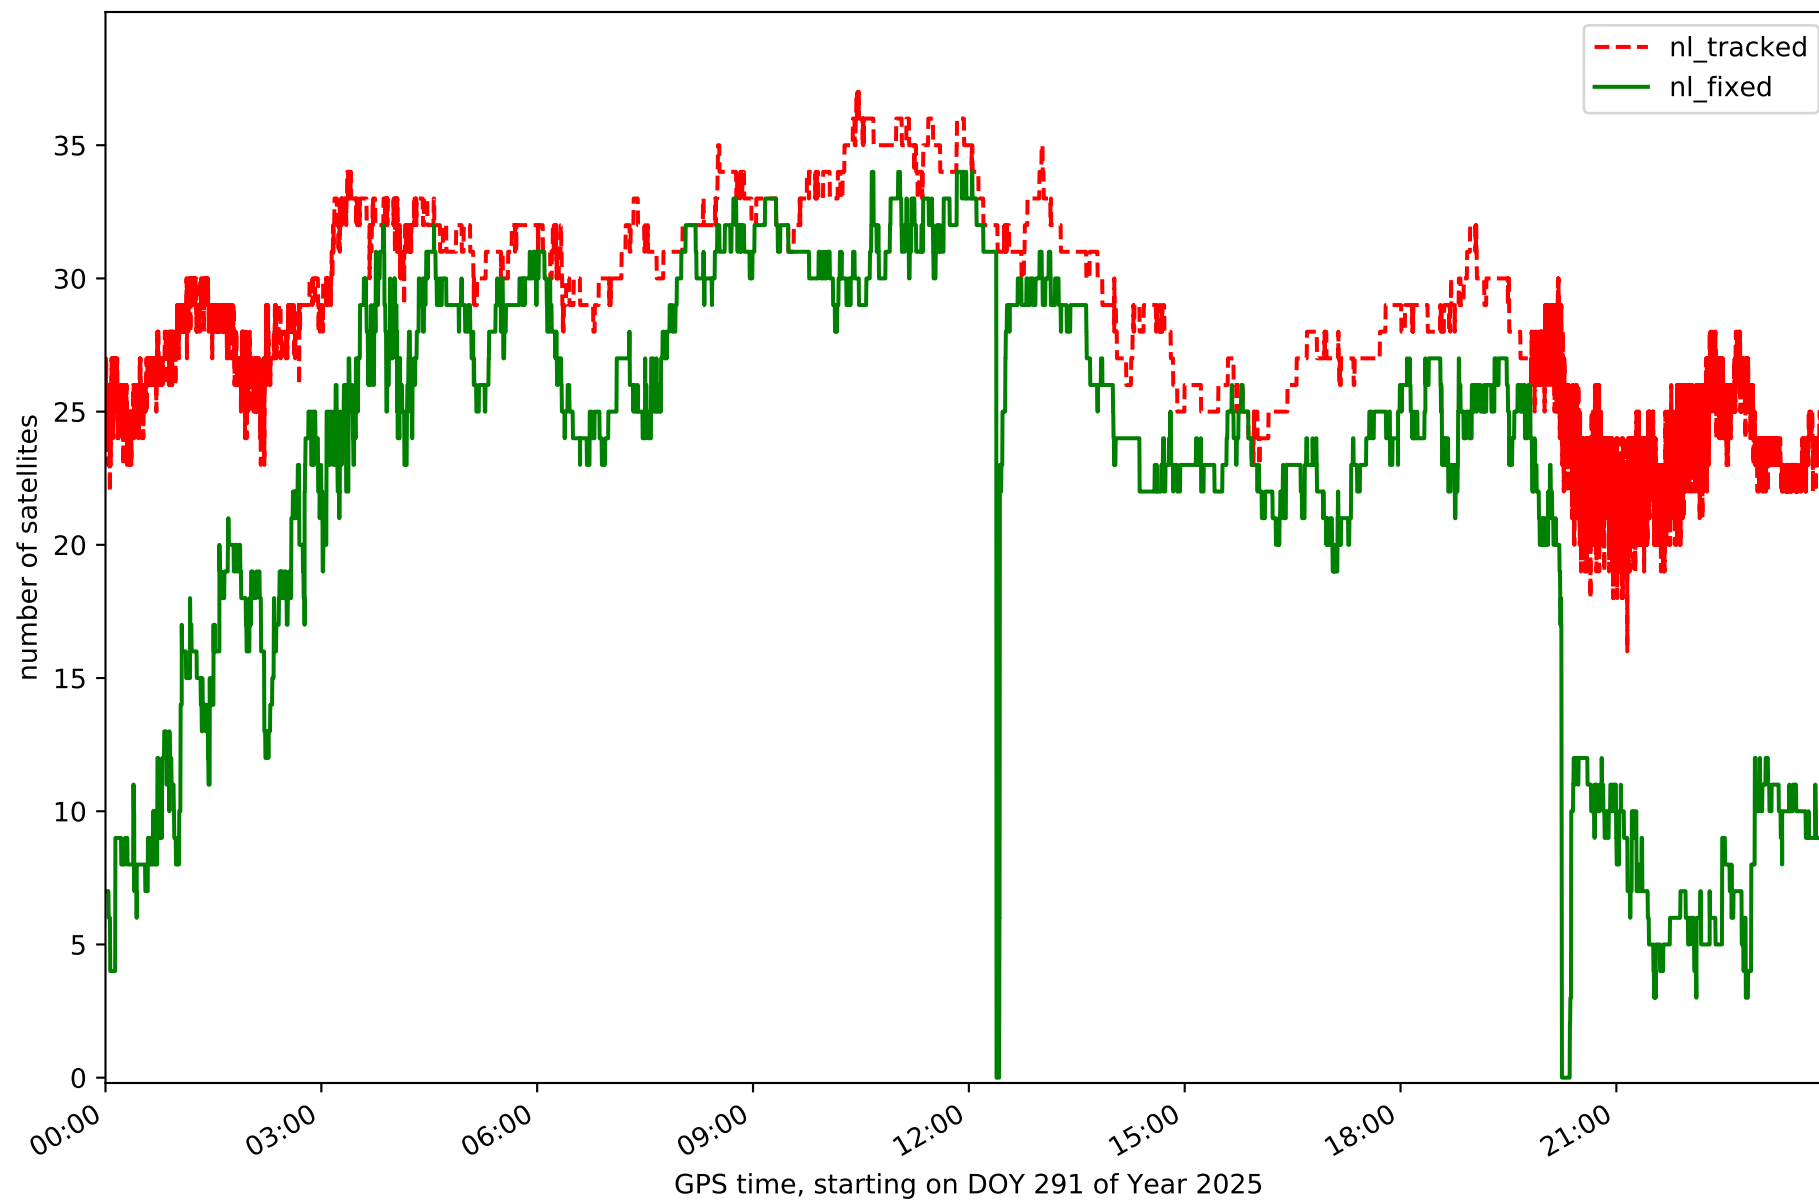


Station LP01 in network N32T

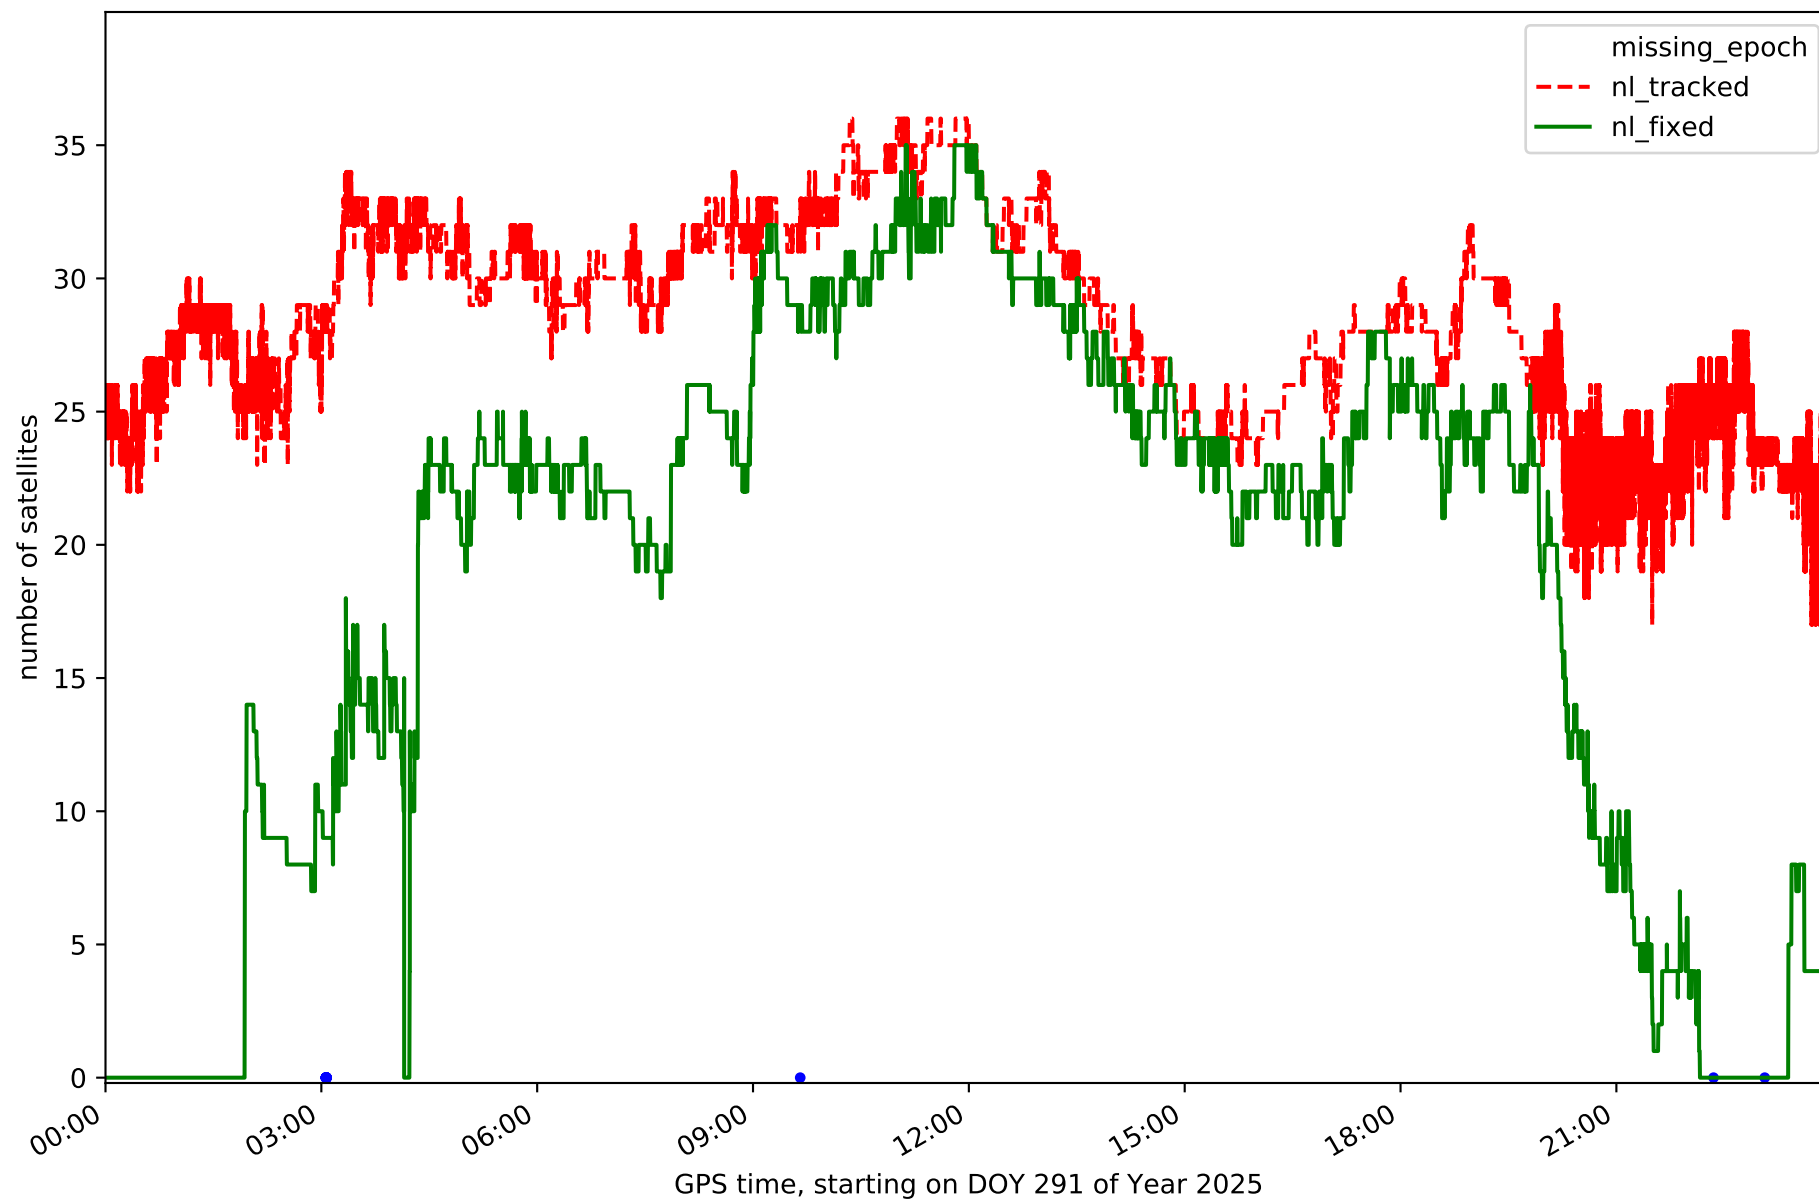


Station LP03 in network N32T

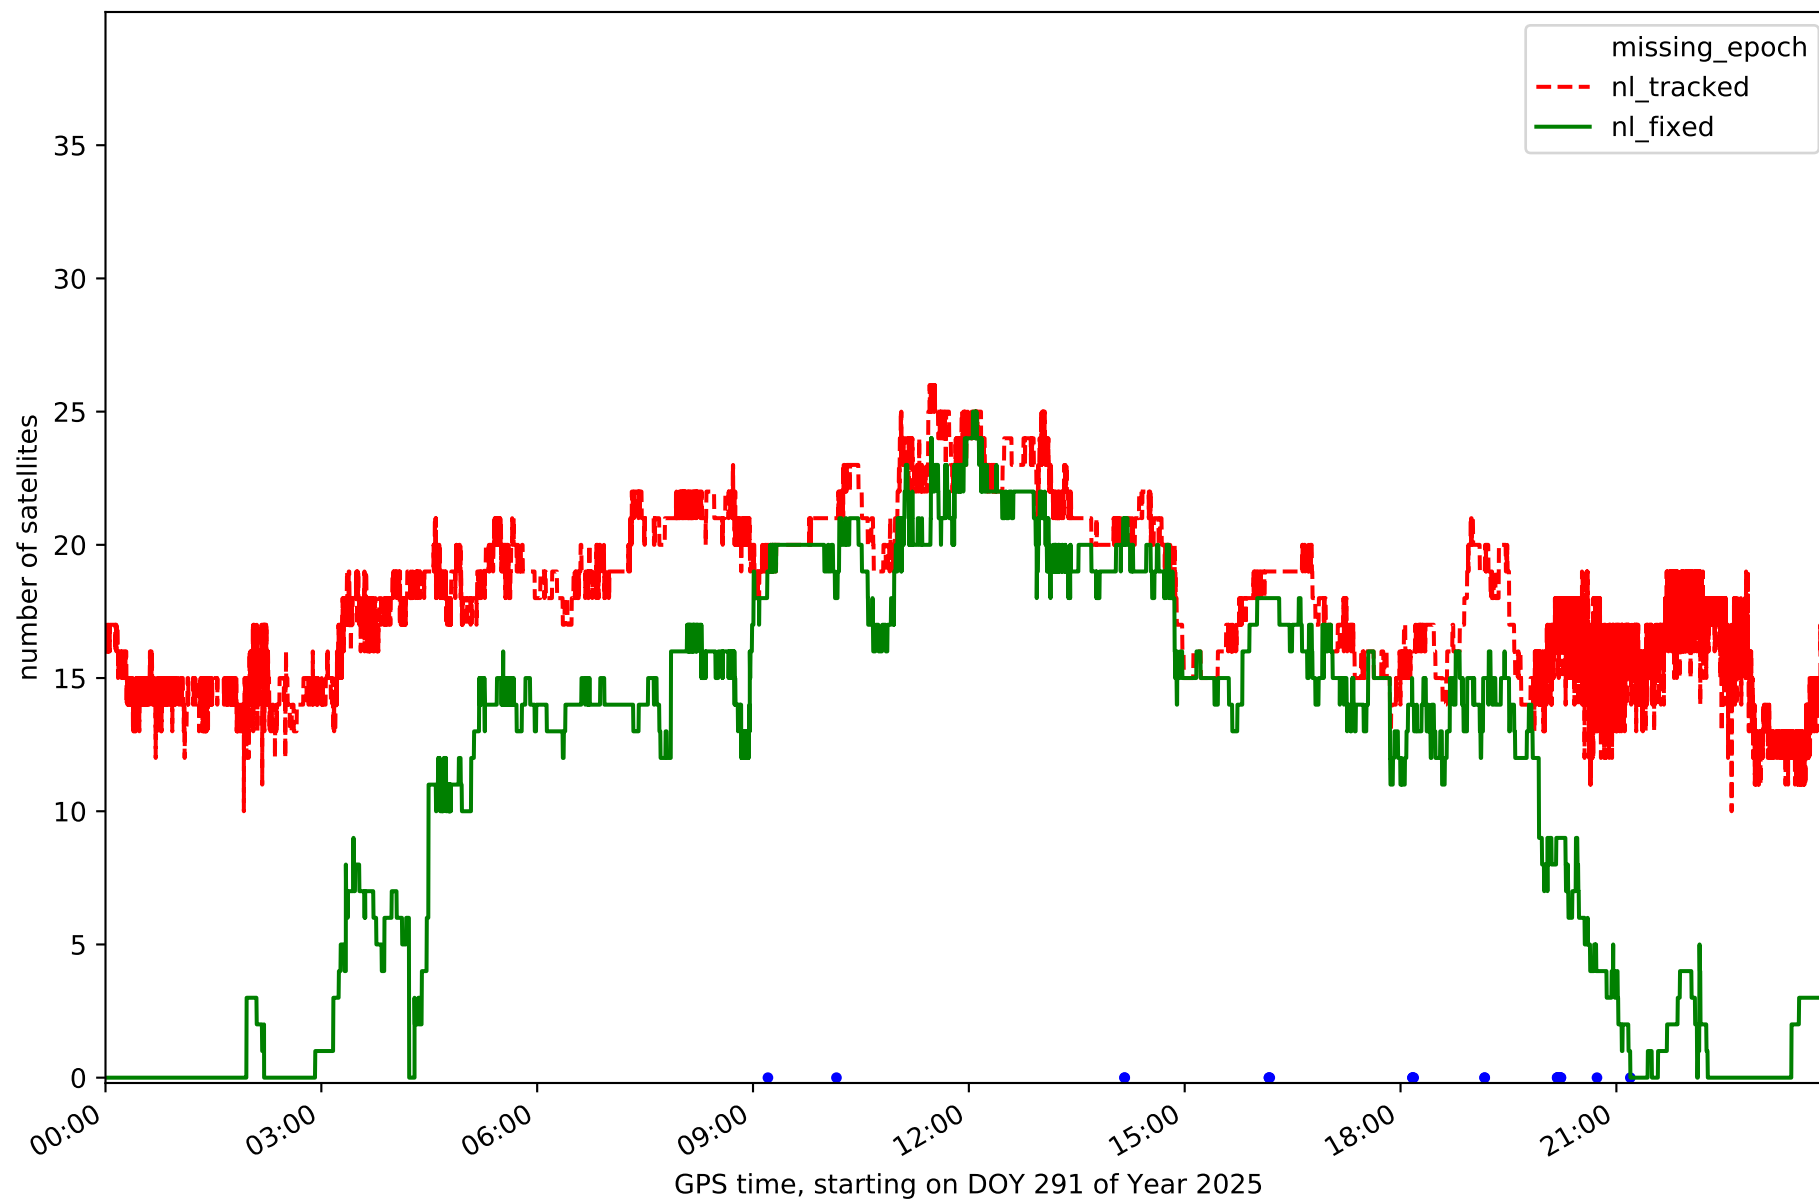


Station LPAL in network N32T

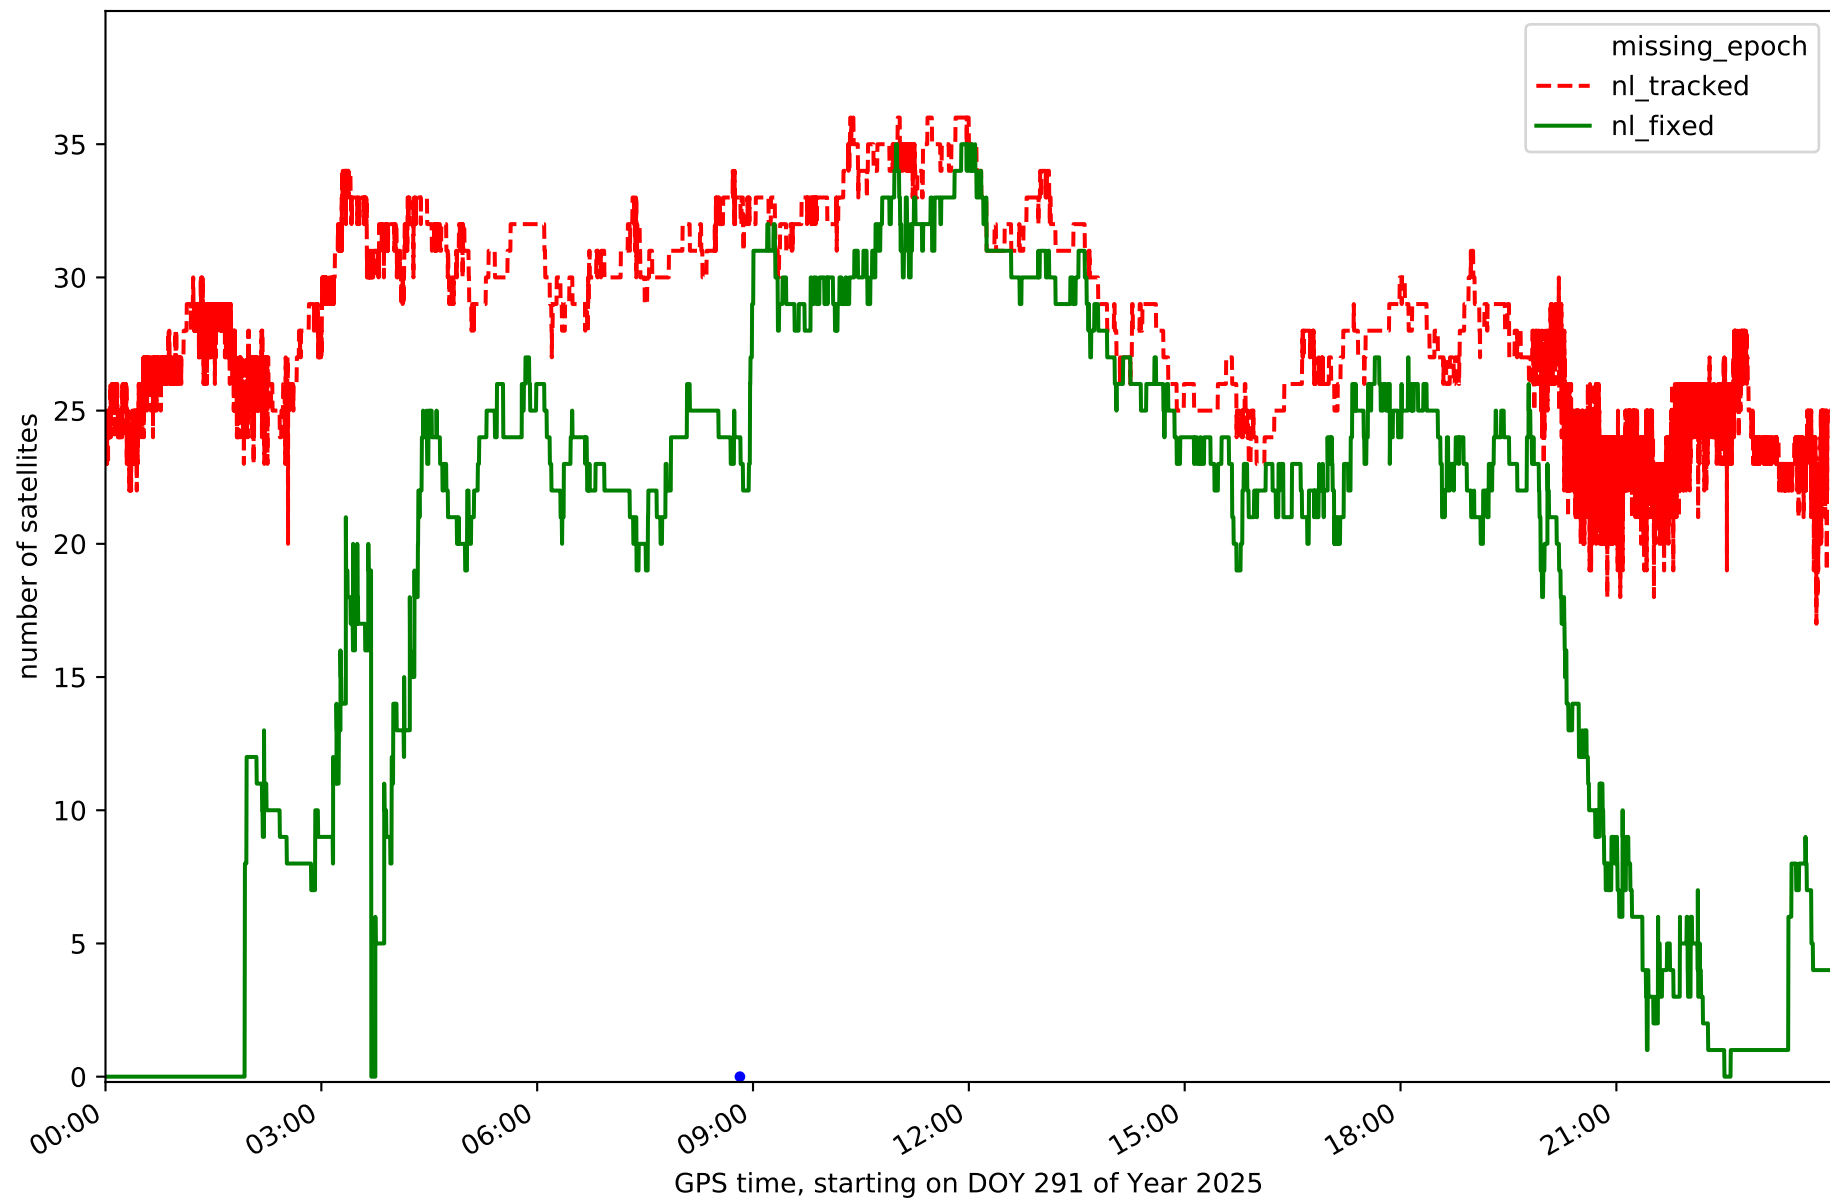


Station LRES in network N32T

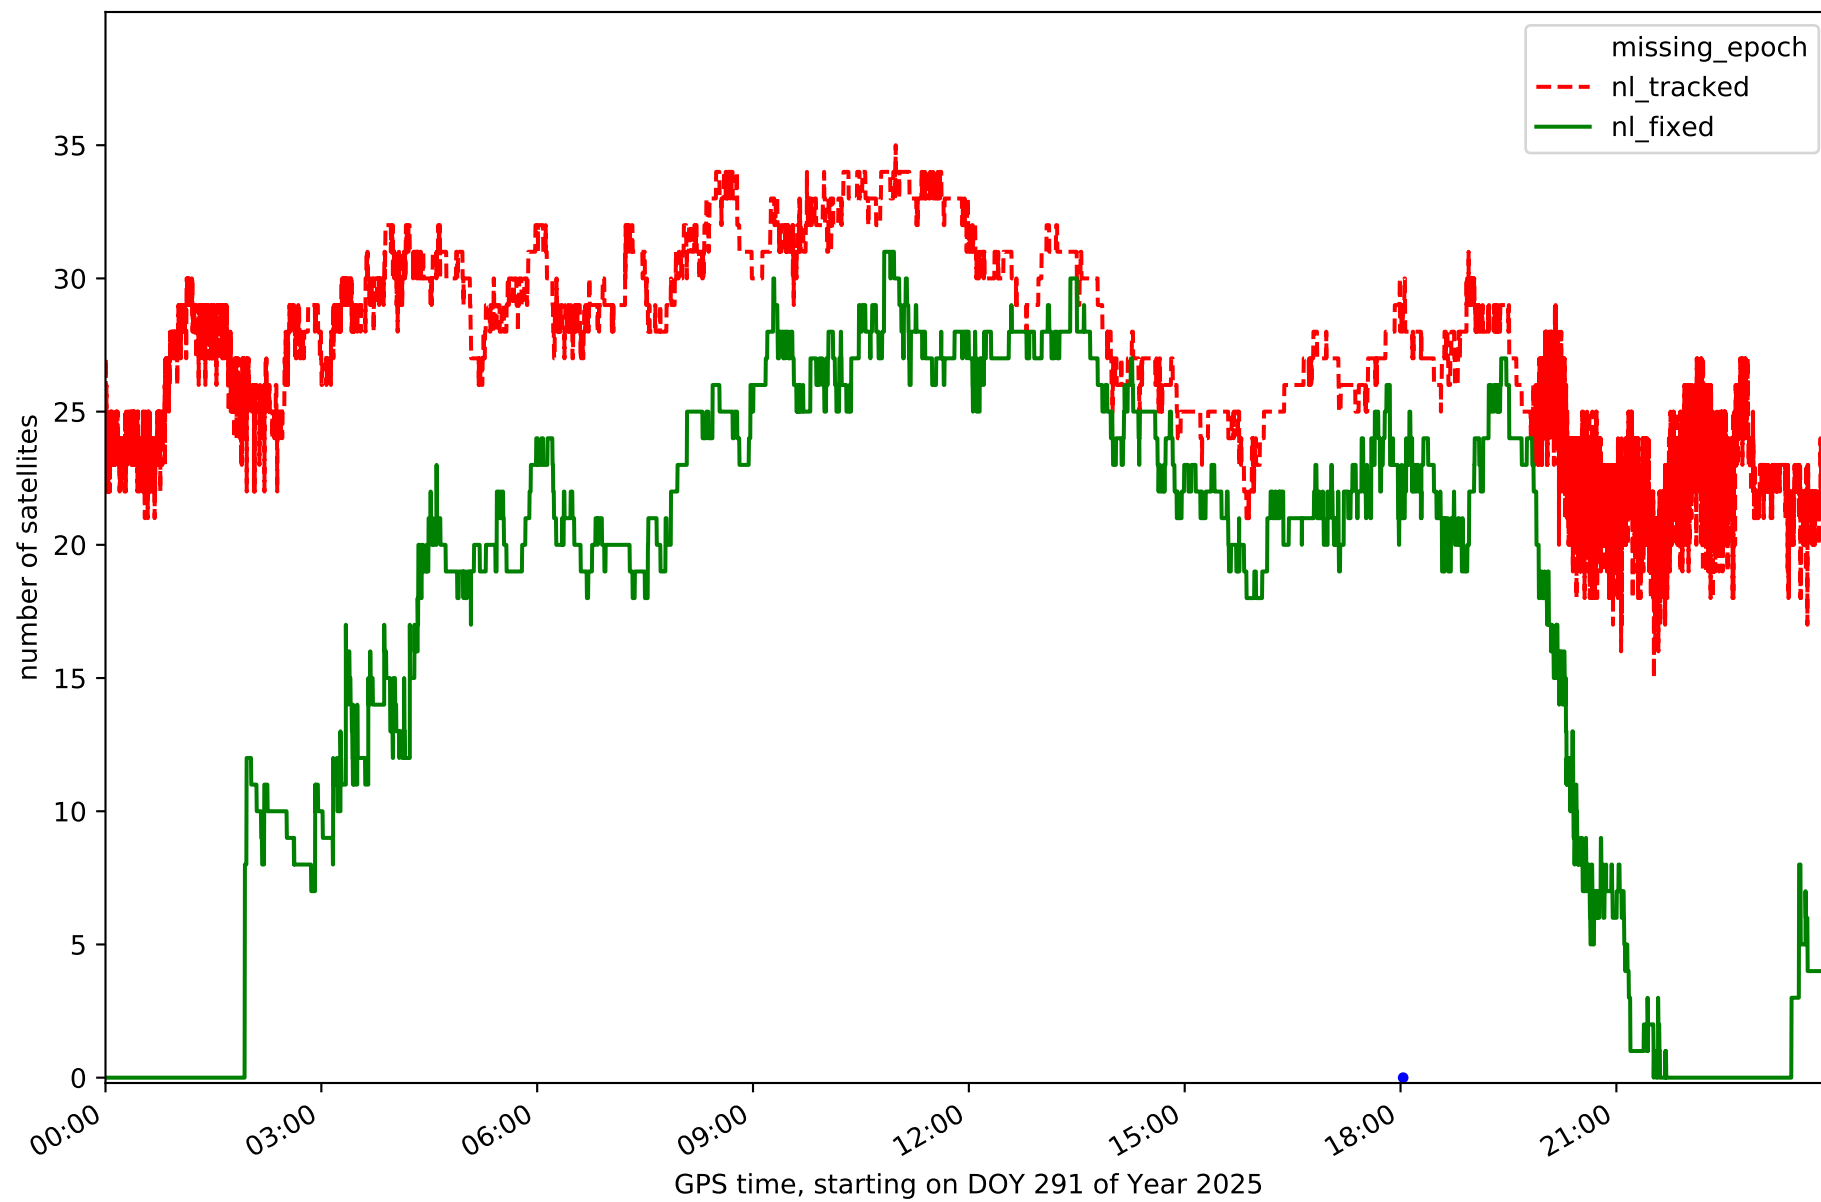


Station TN01 in network N32T

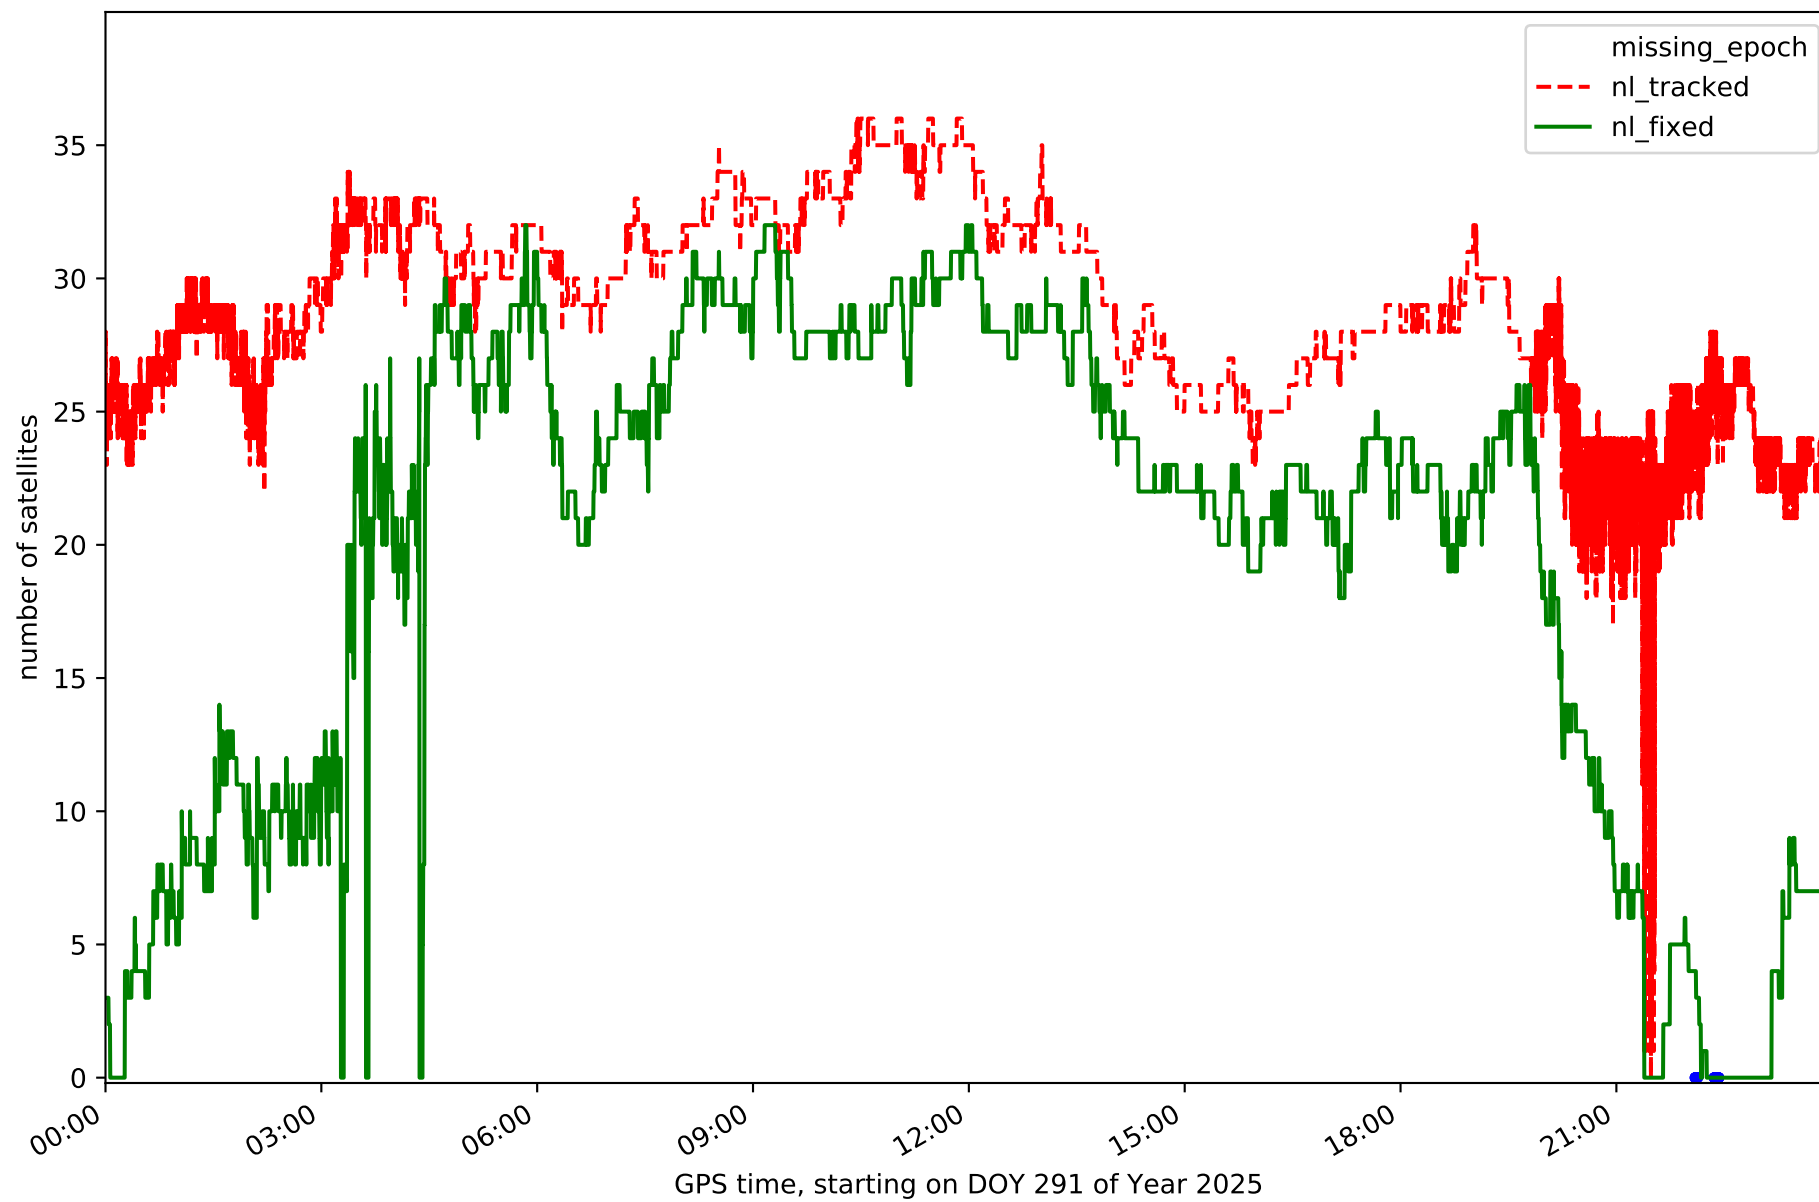


Station TN02 in network N32T

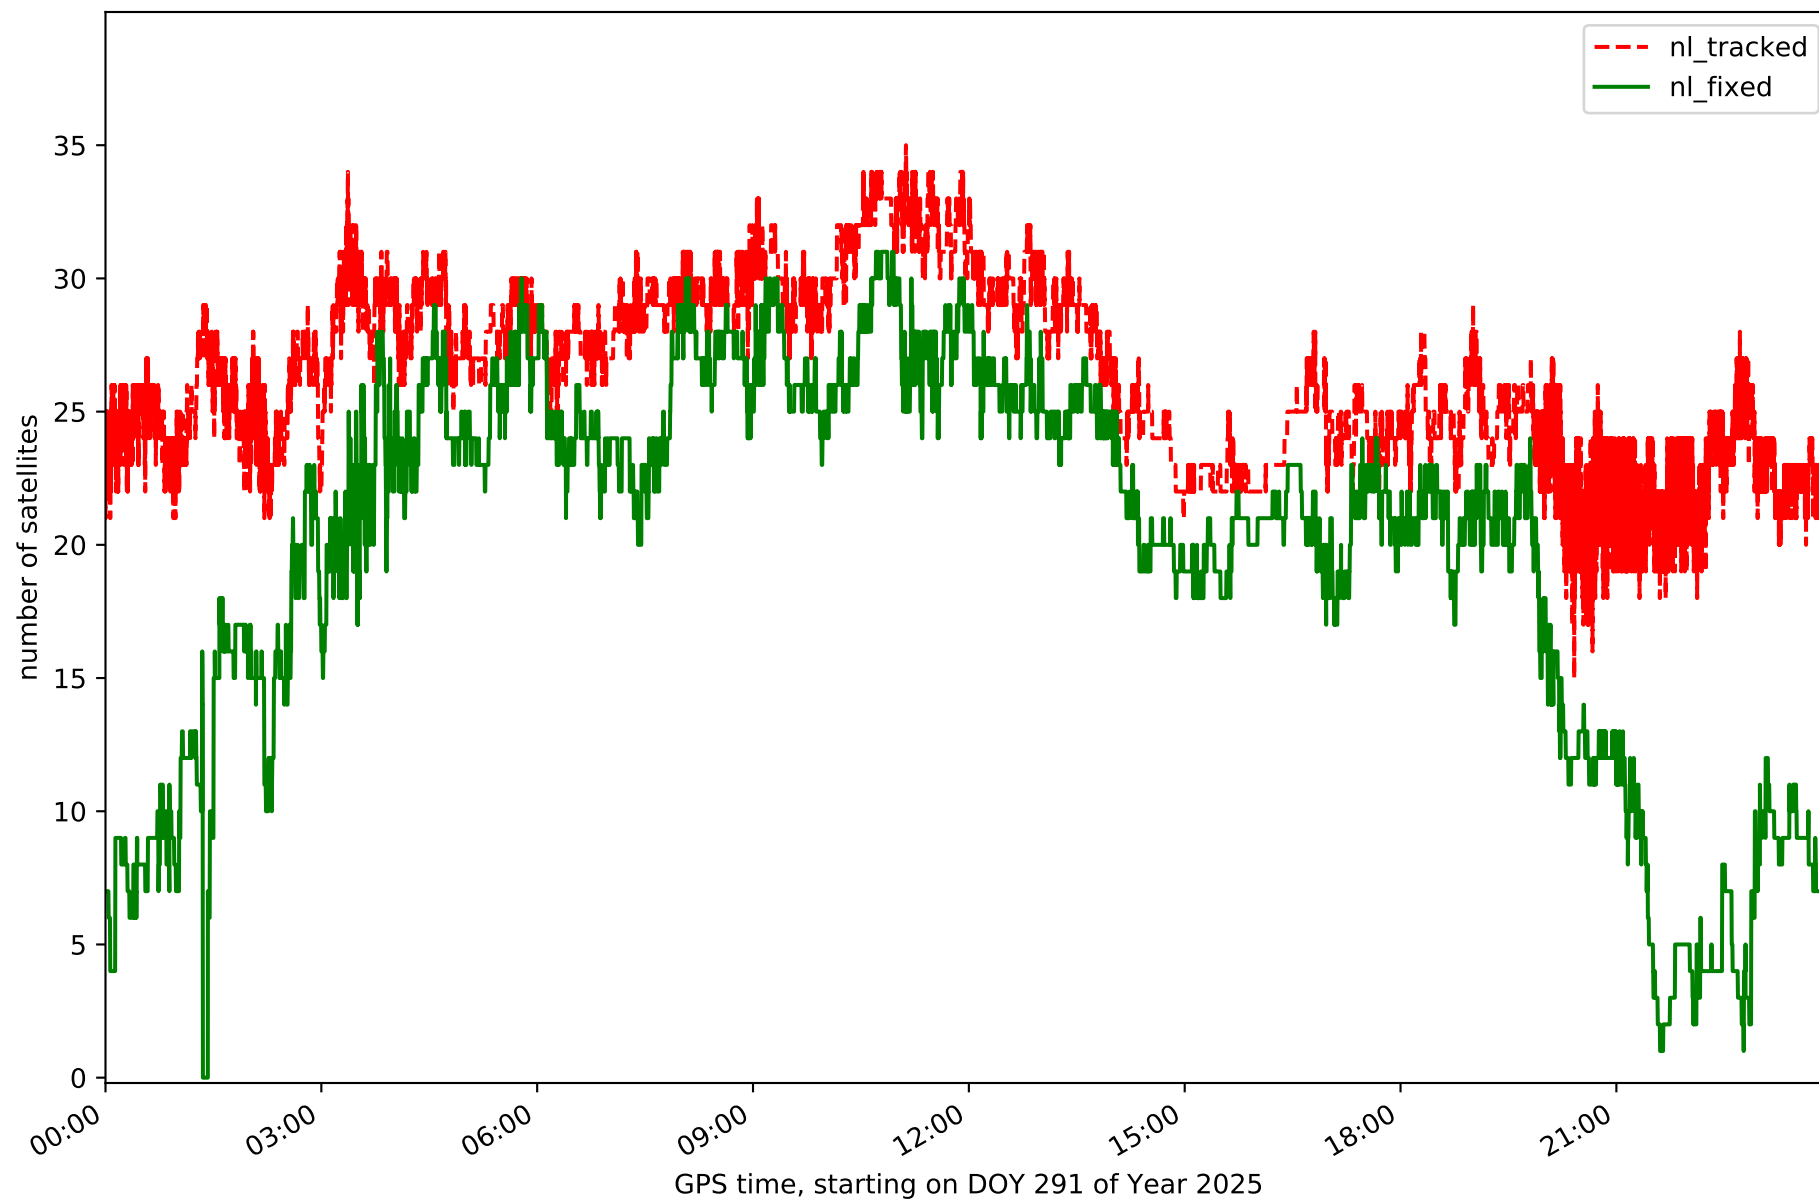


Station TN03 in network N32T

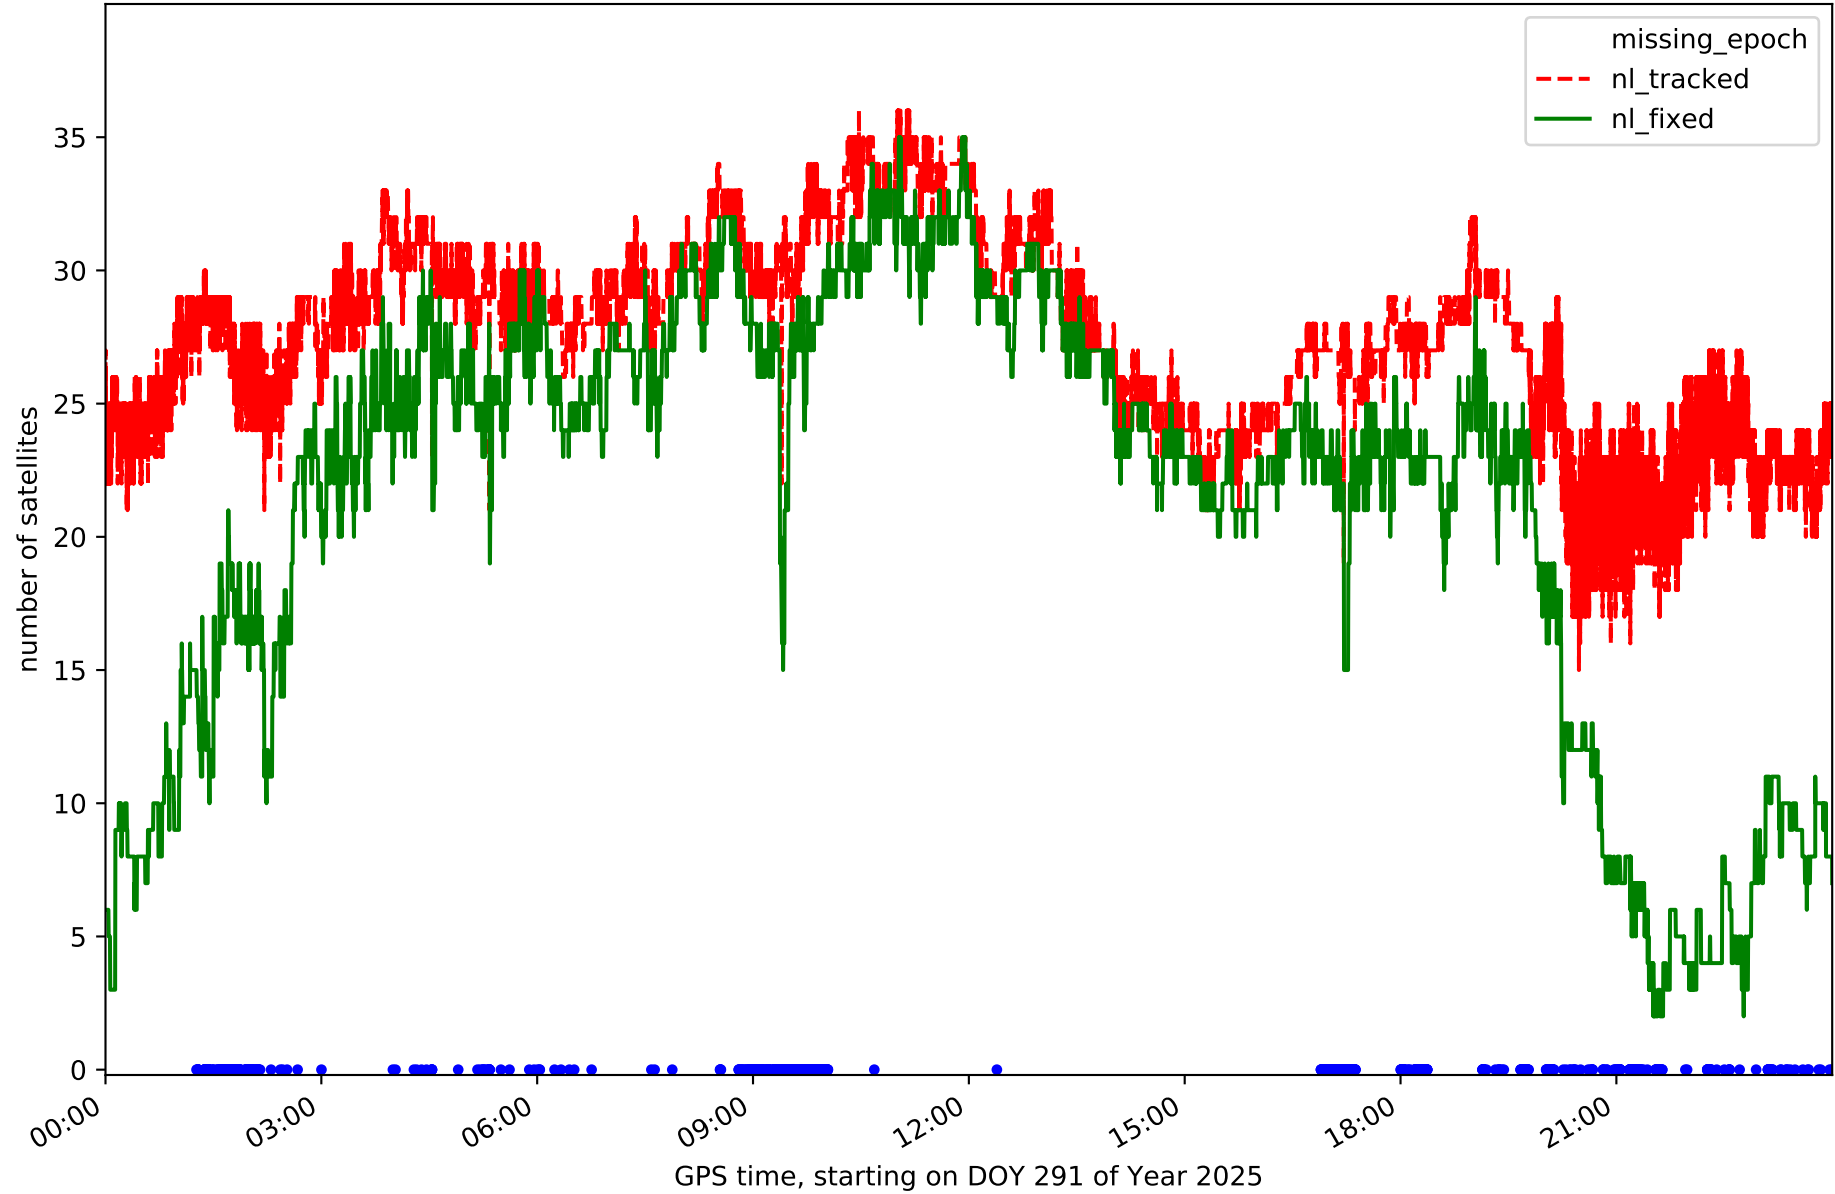


Station TN04 in network N32T

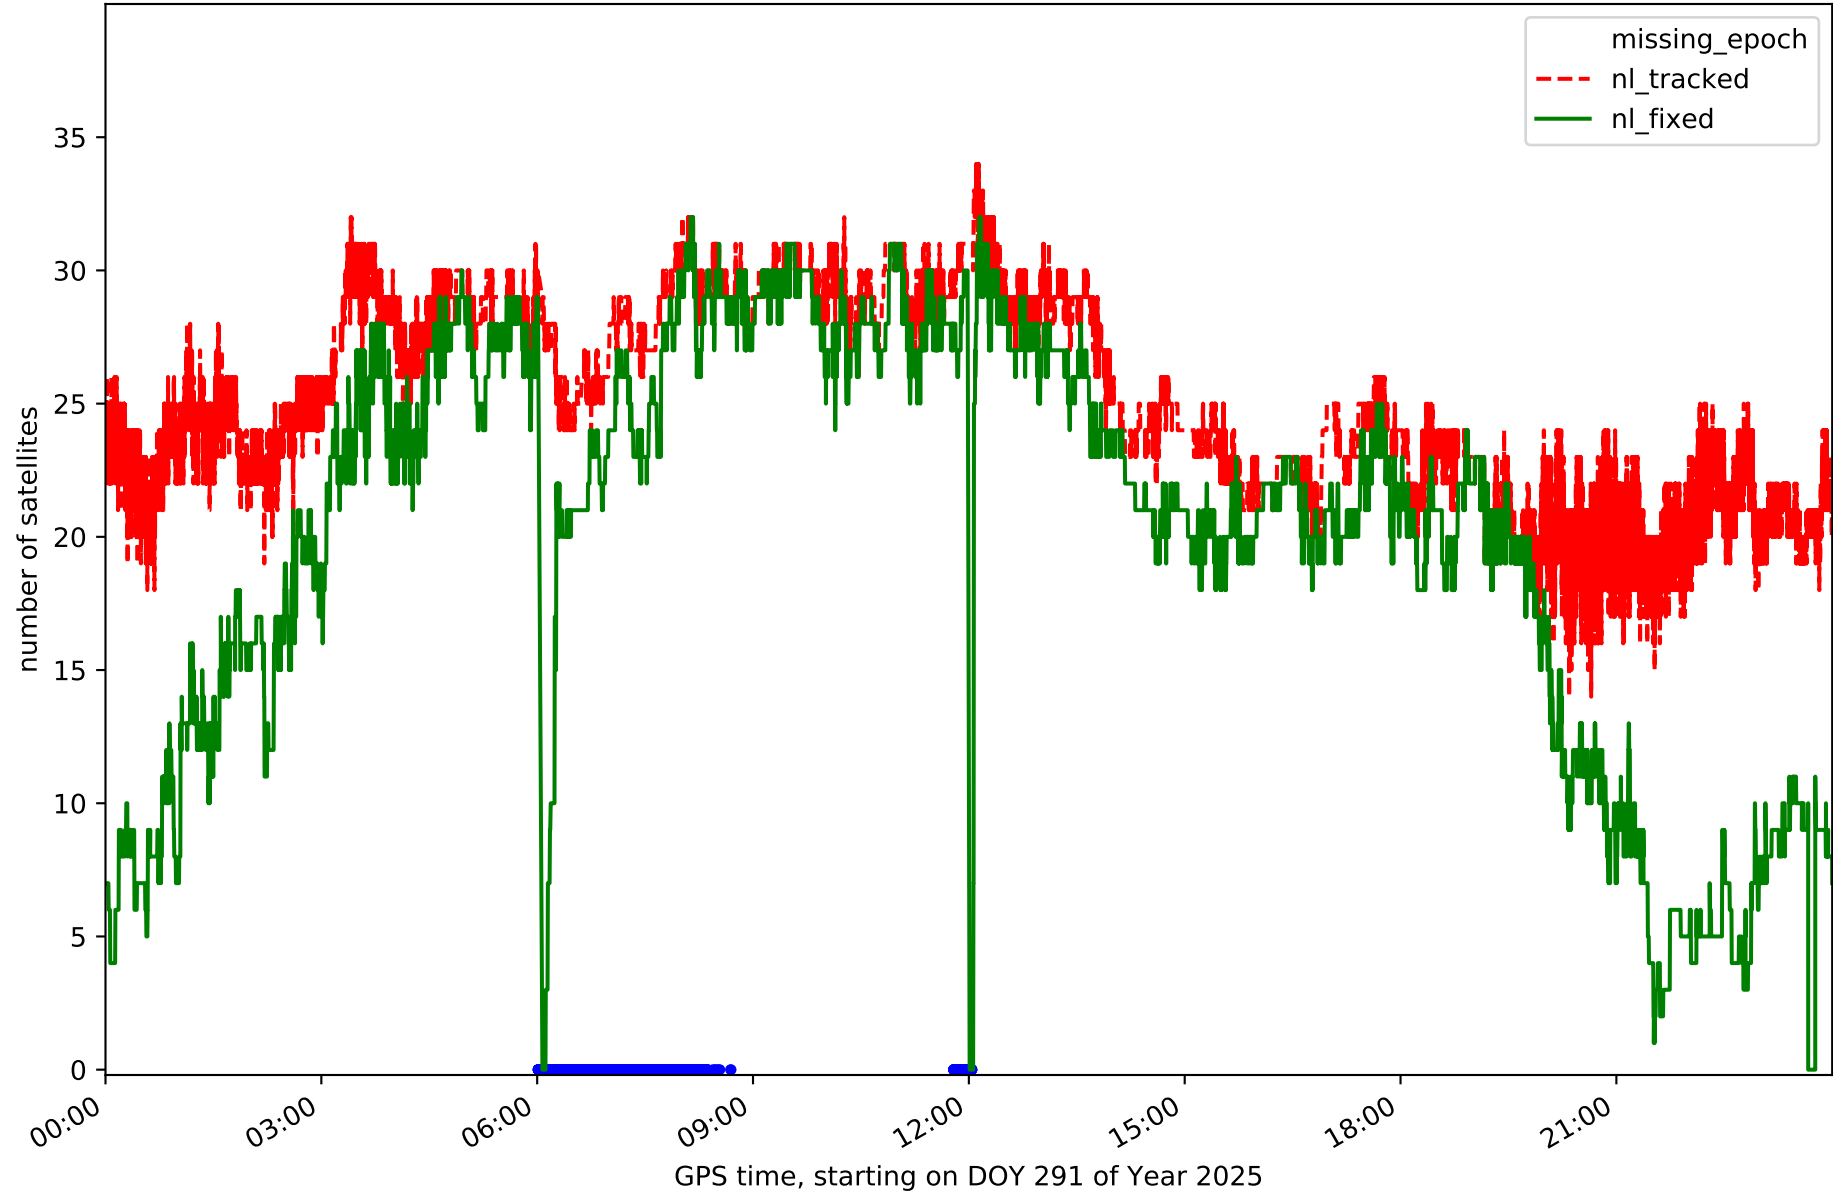


Station TN06 in network N32T

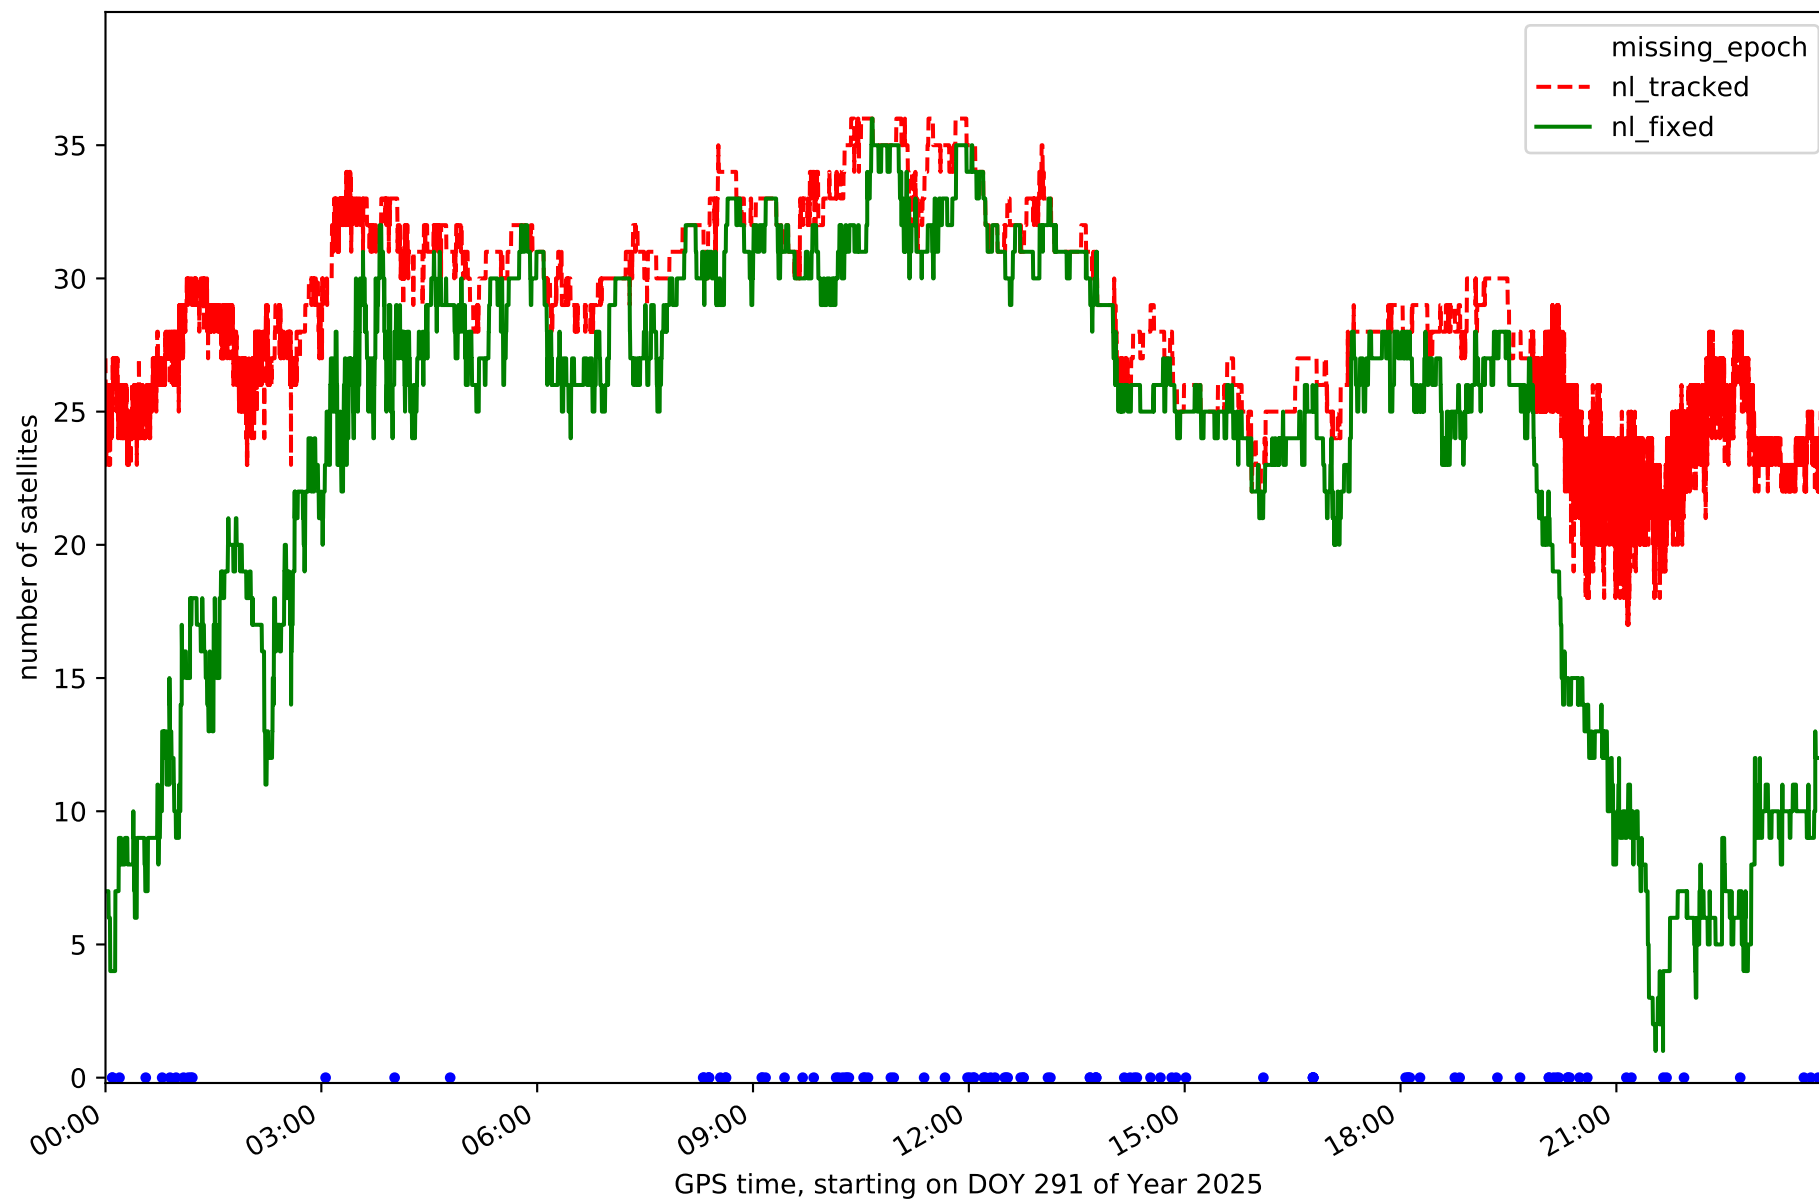


Station TN09 in network N32T

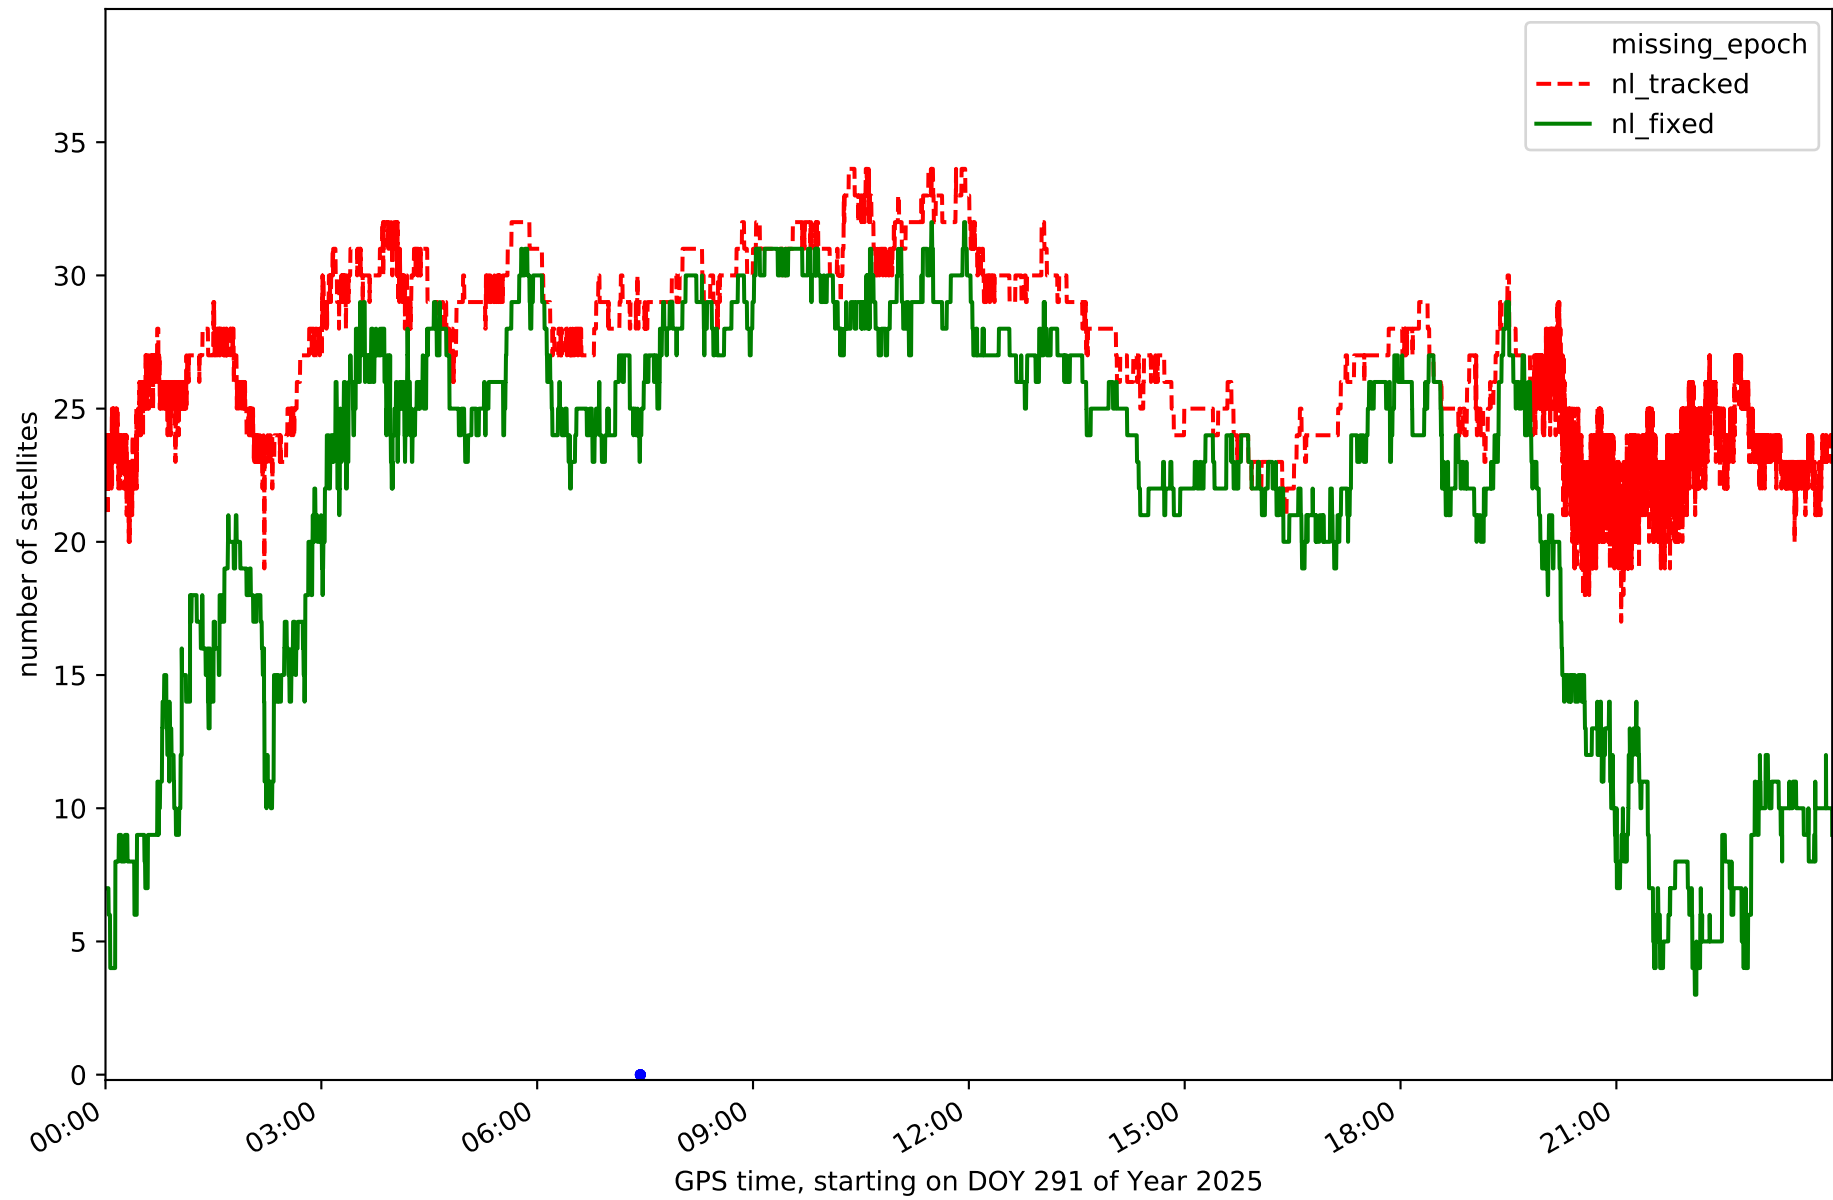


Station TE11 in network N32T

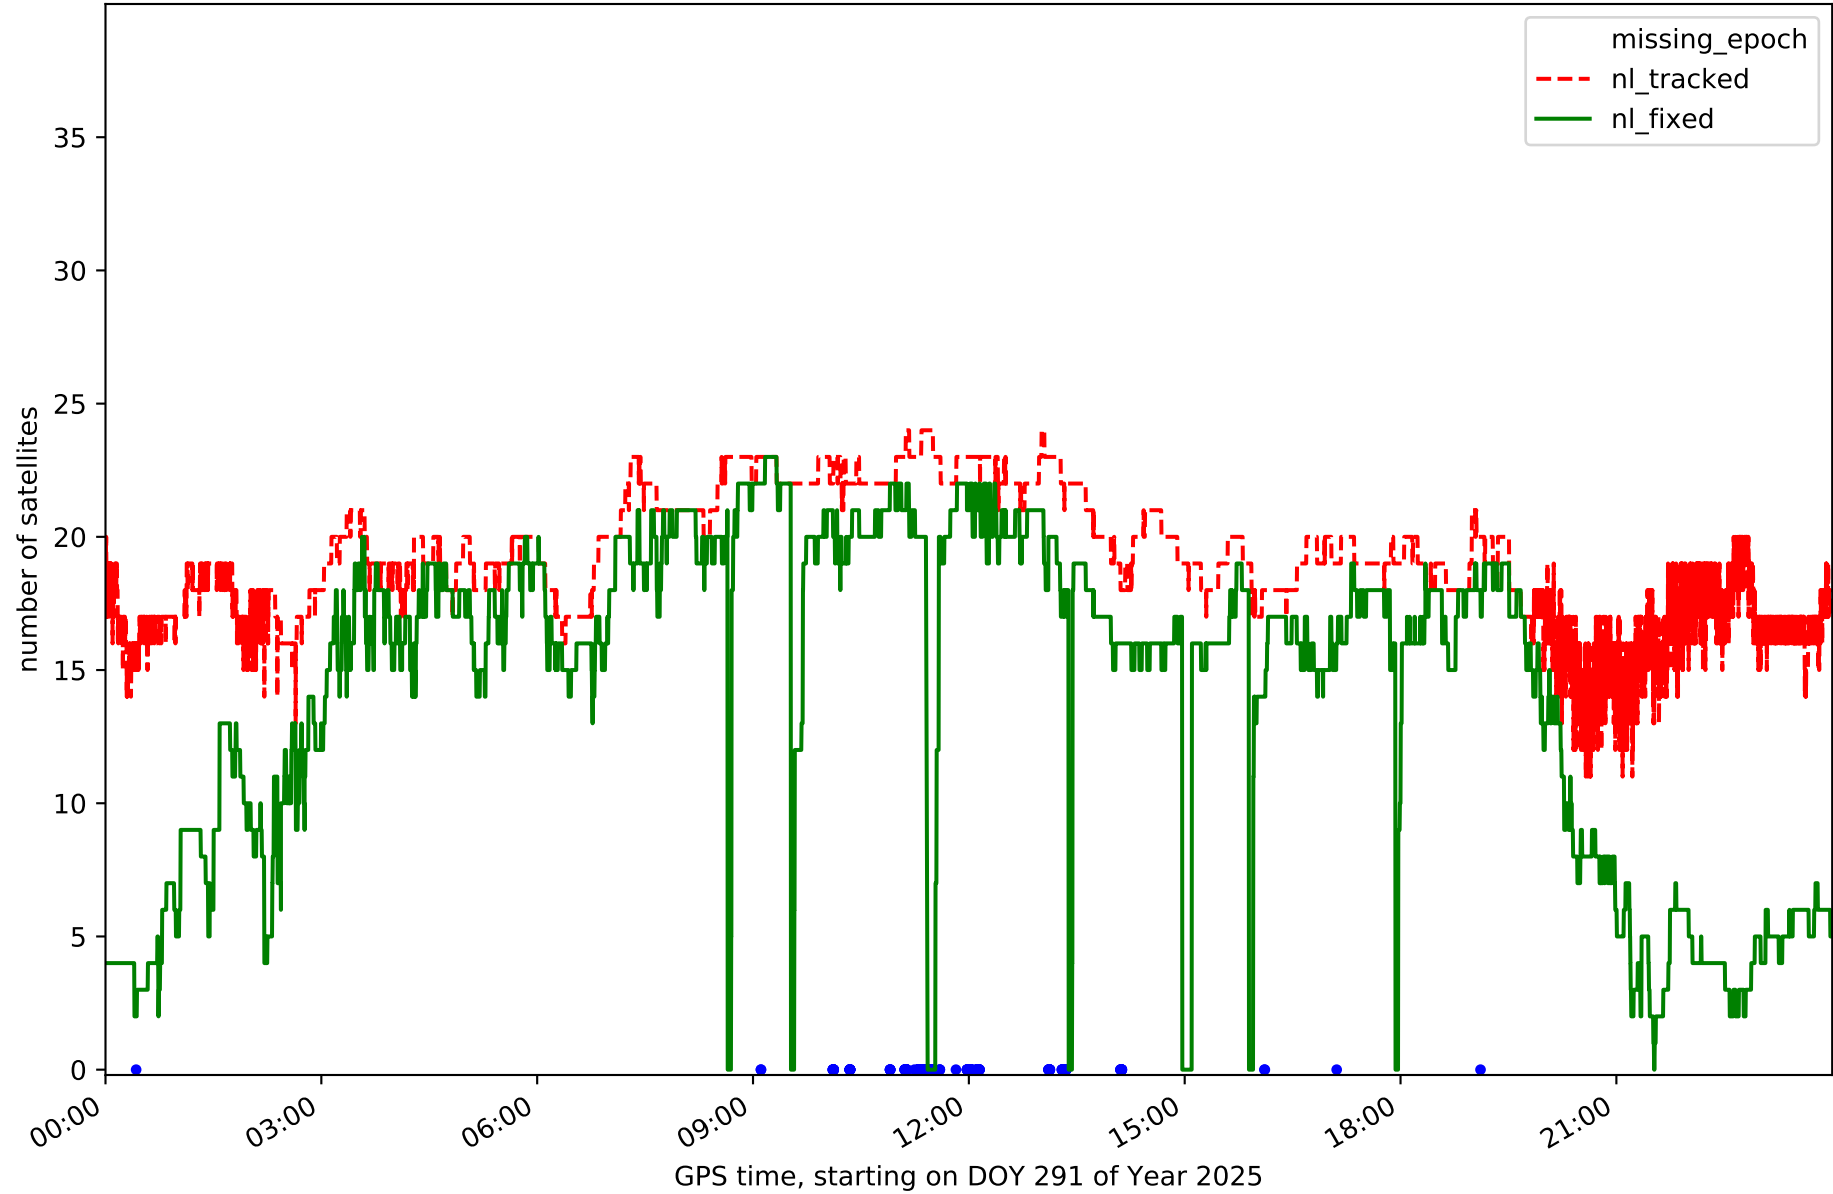


RefCheck for station EH01 in network N32T

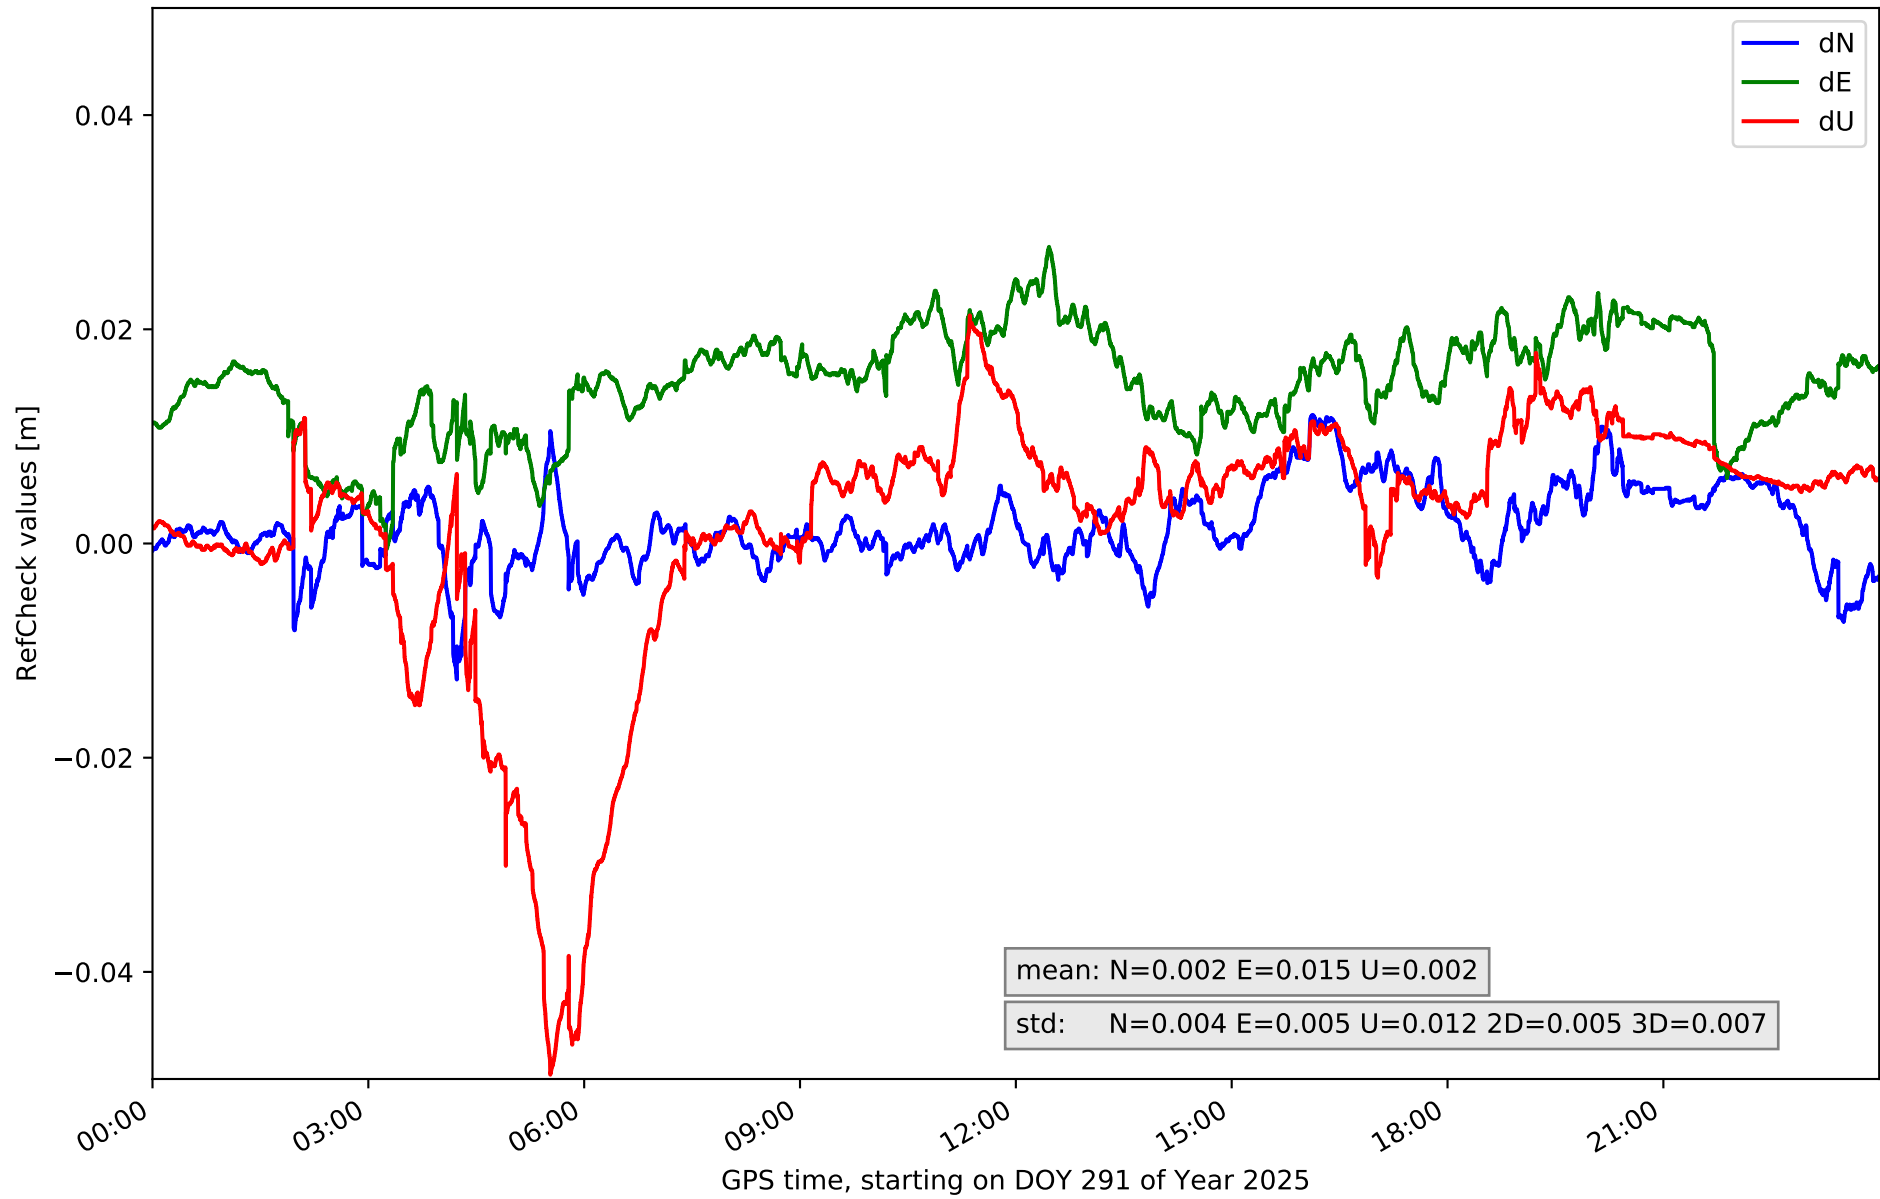


RefCheck for station GOM1 in network N32T

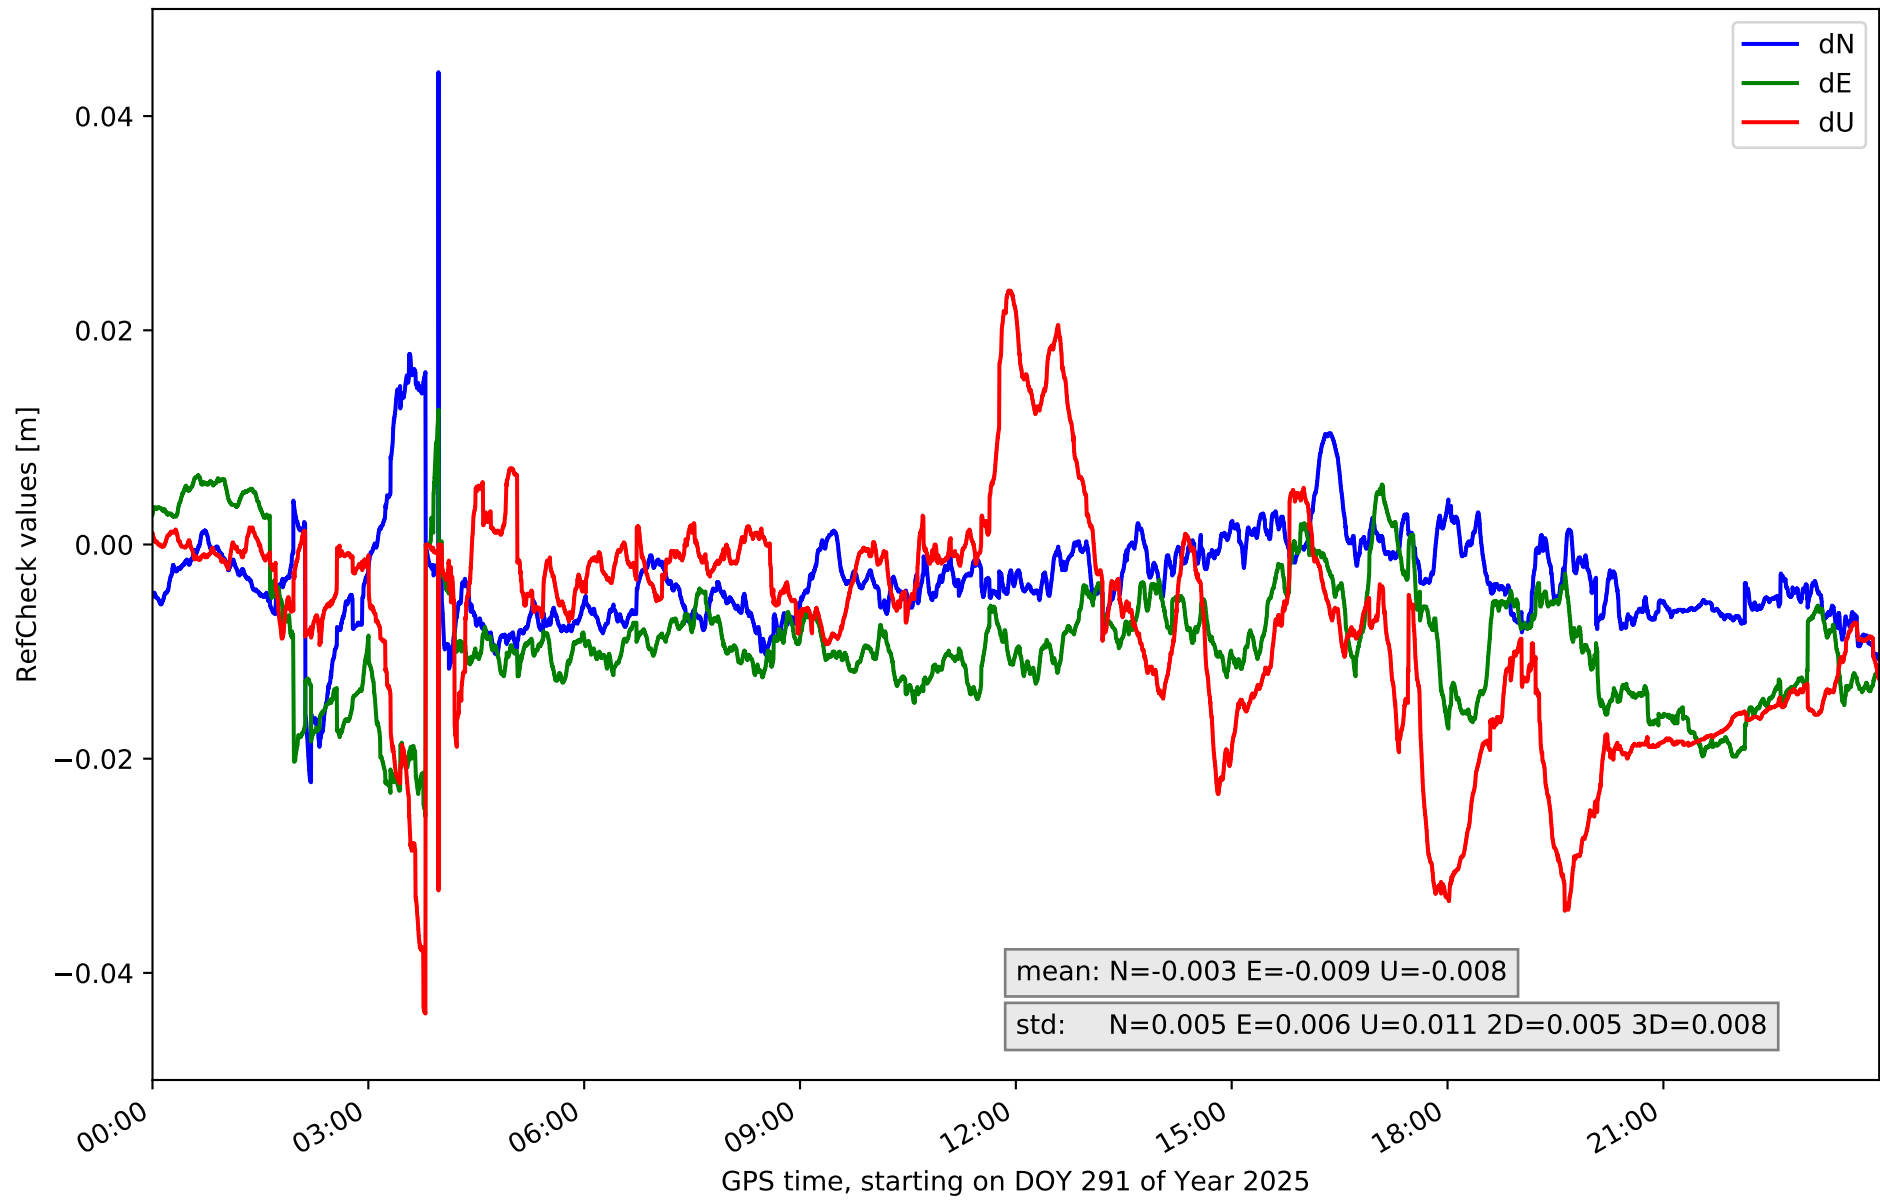


RefCheck for station GOME in network N32T

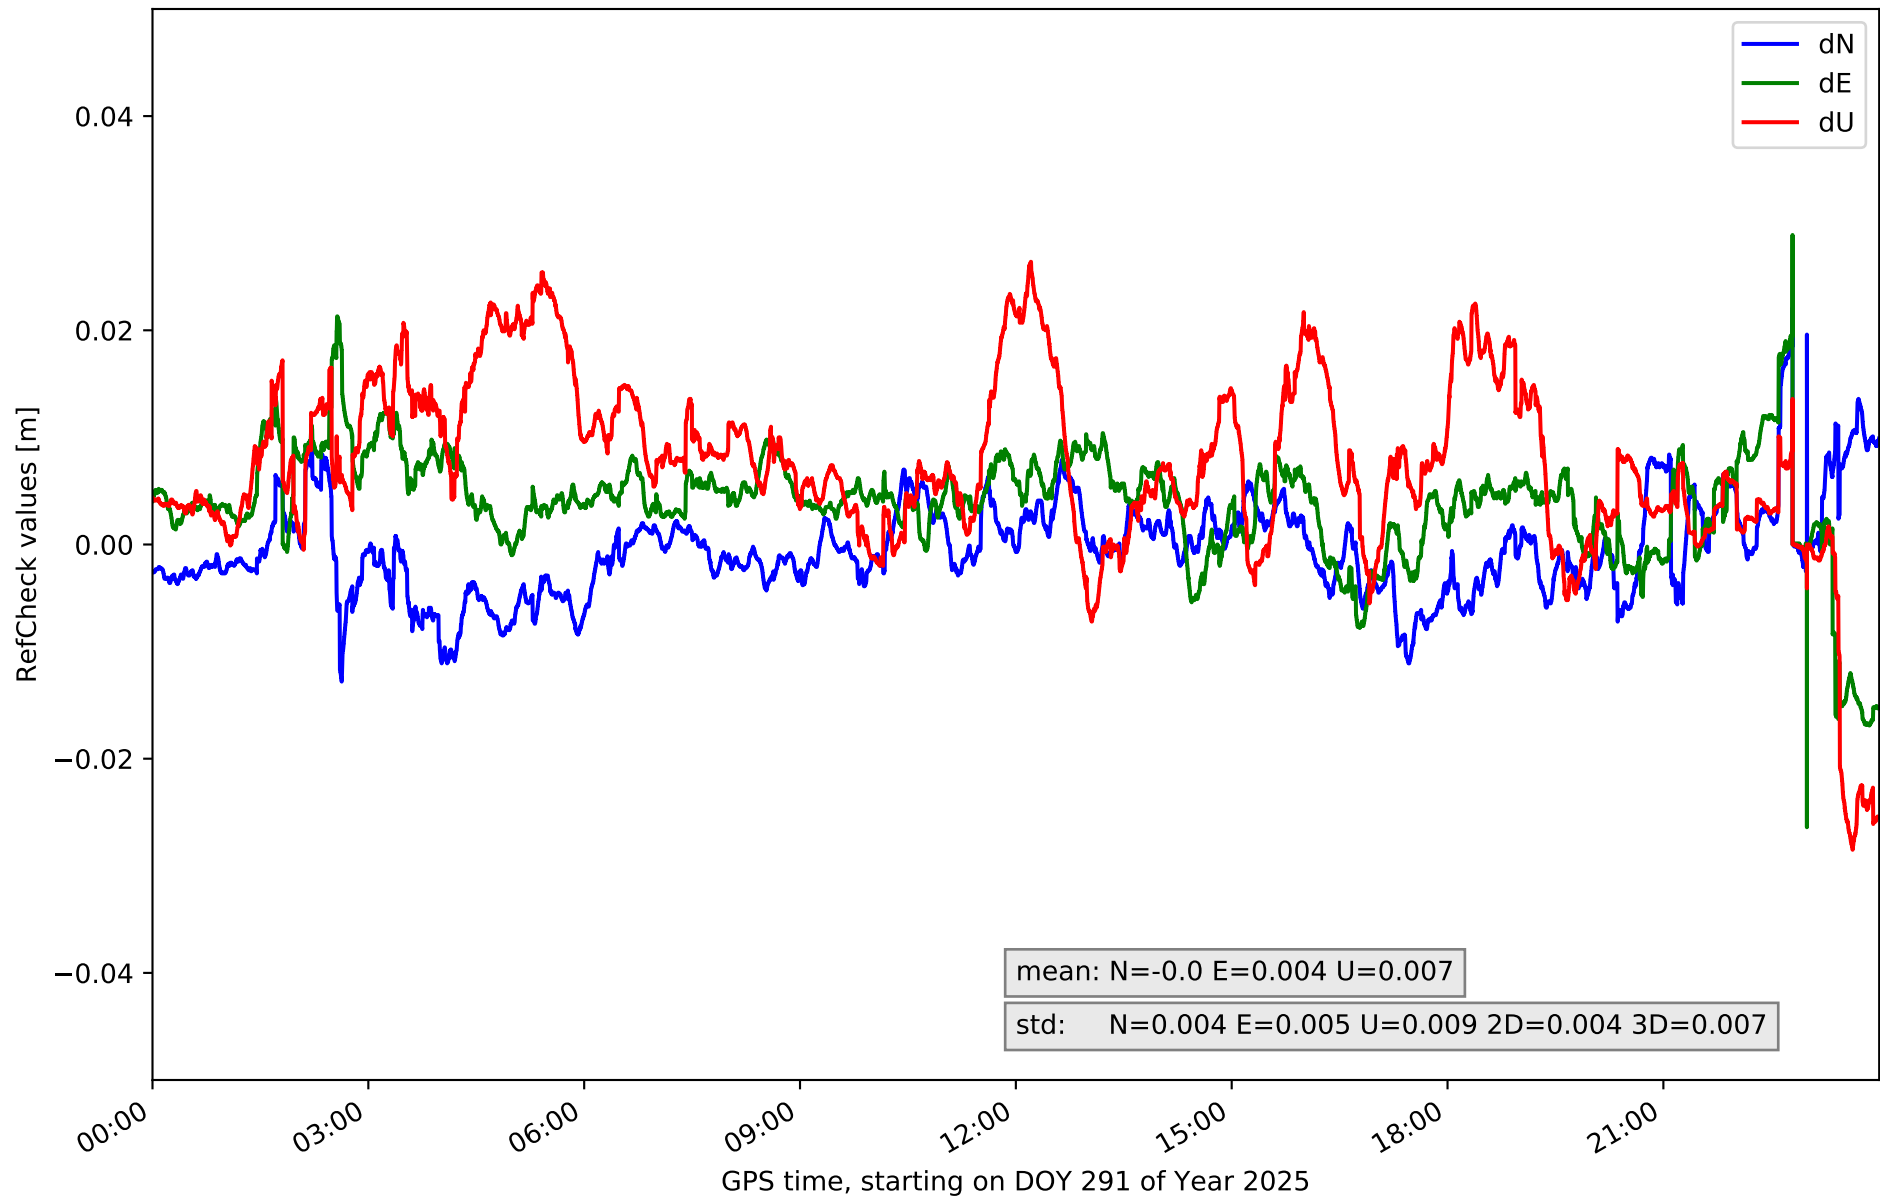


RefCheck for station IZAN in network N32T

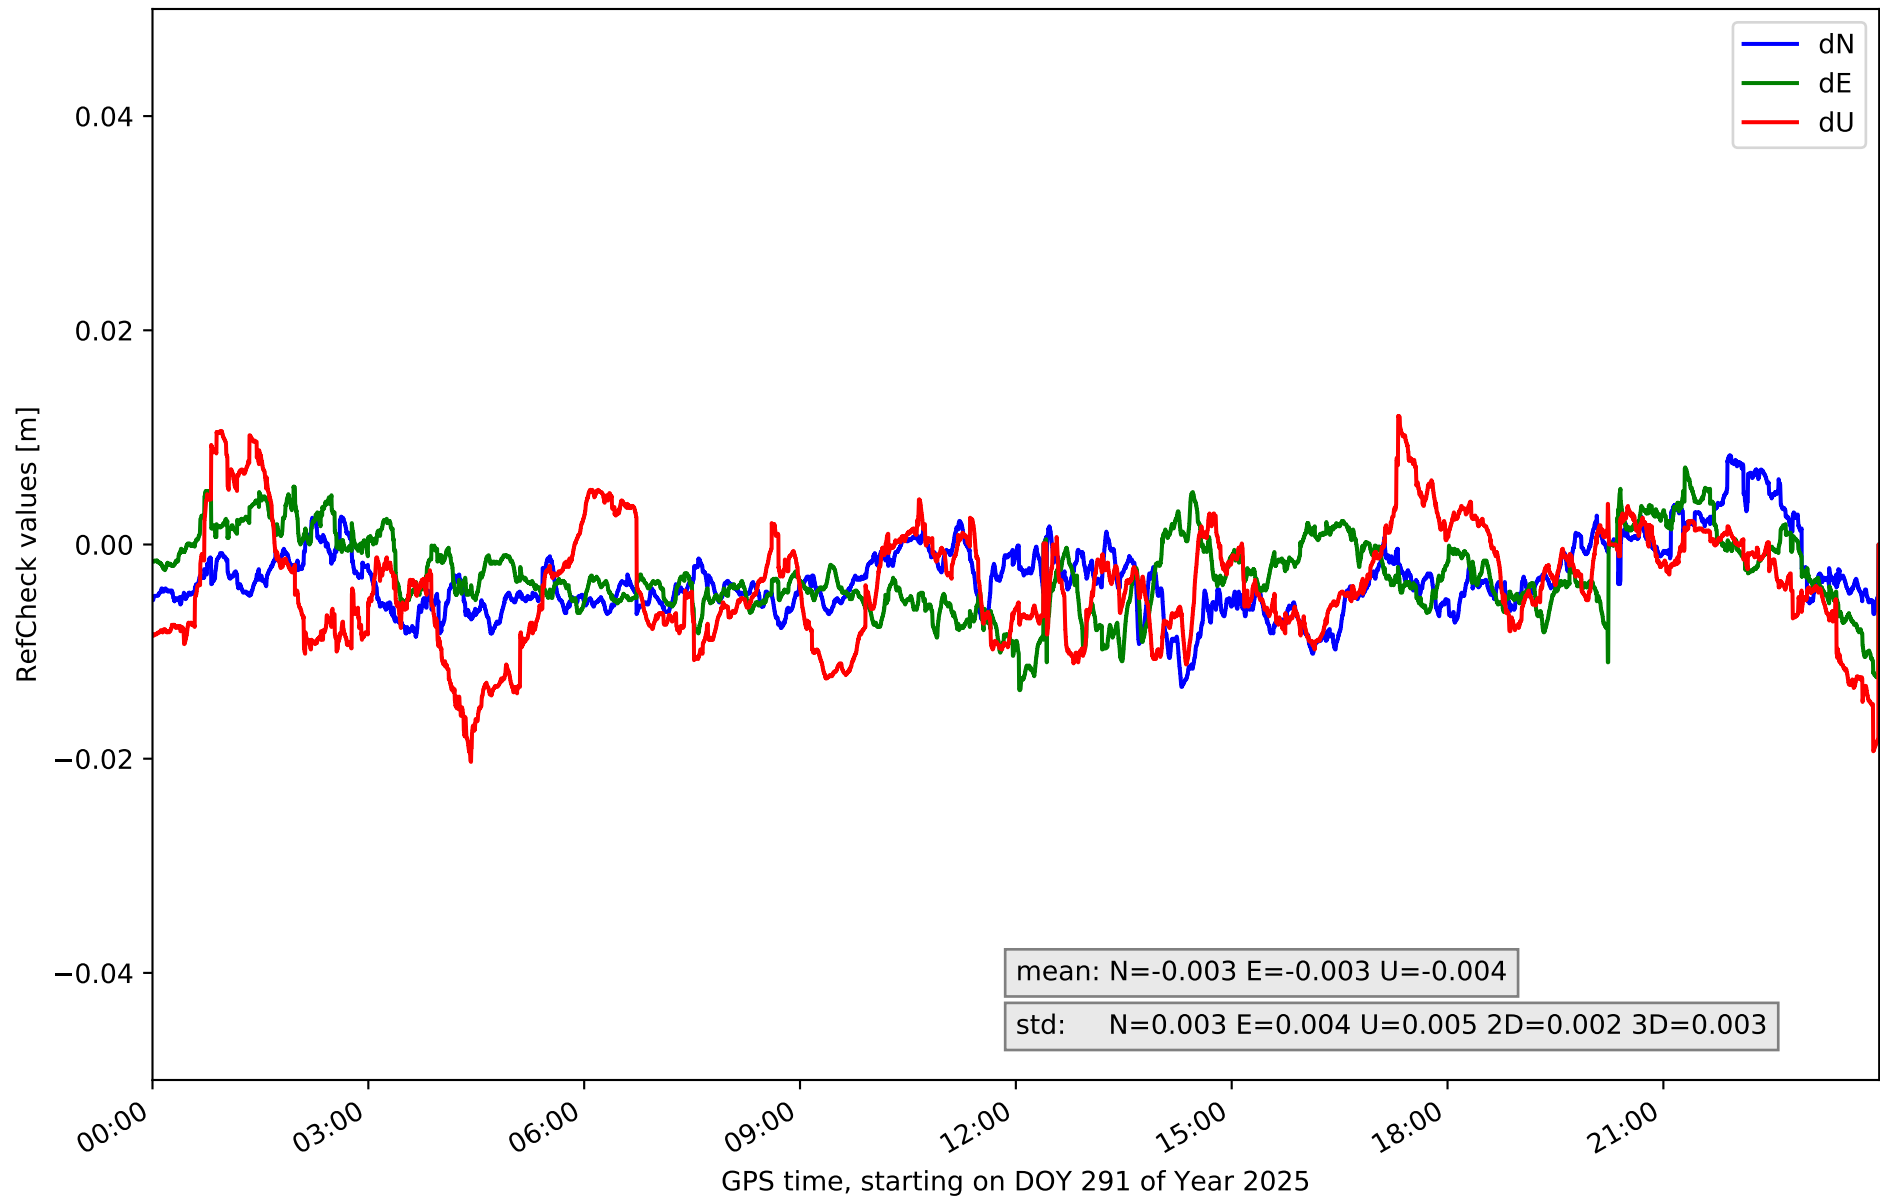


RefCheck for station LP01 in network N32T

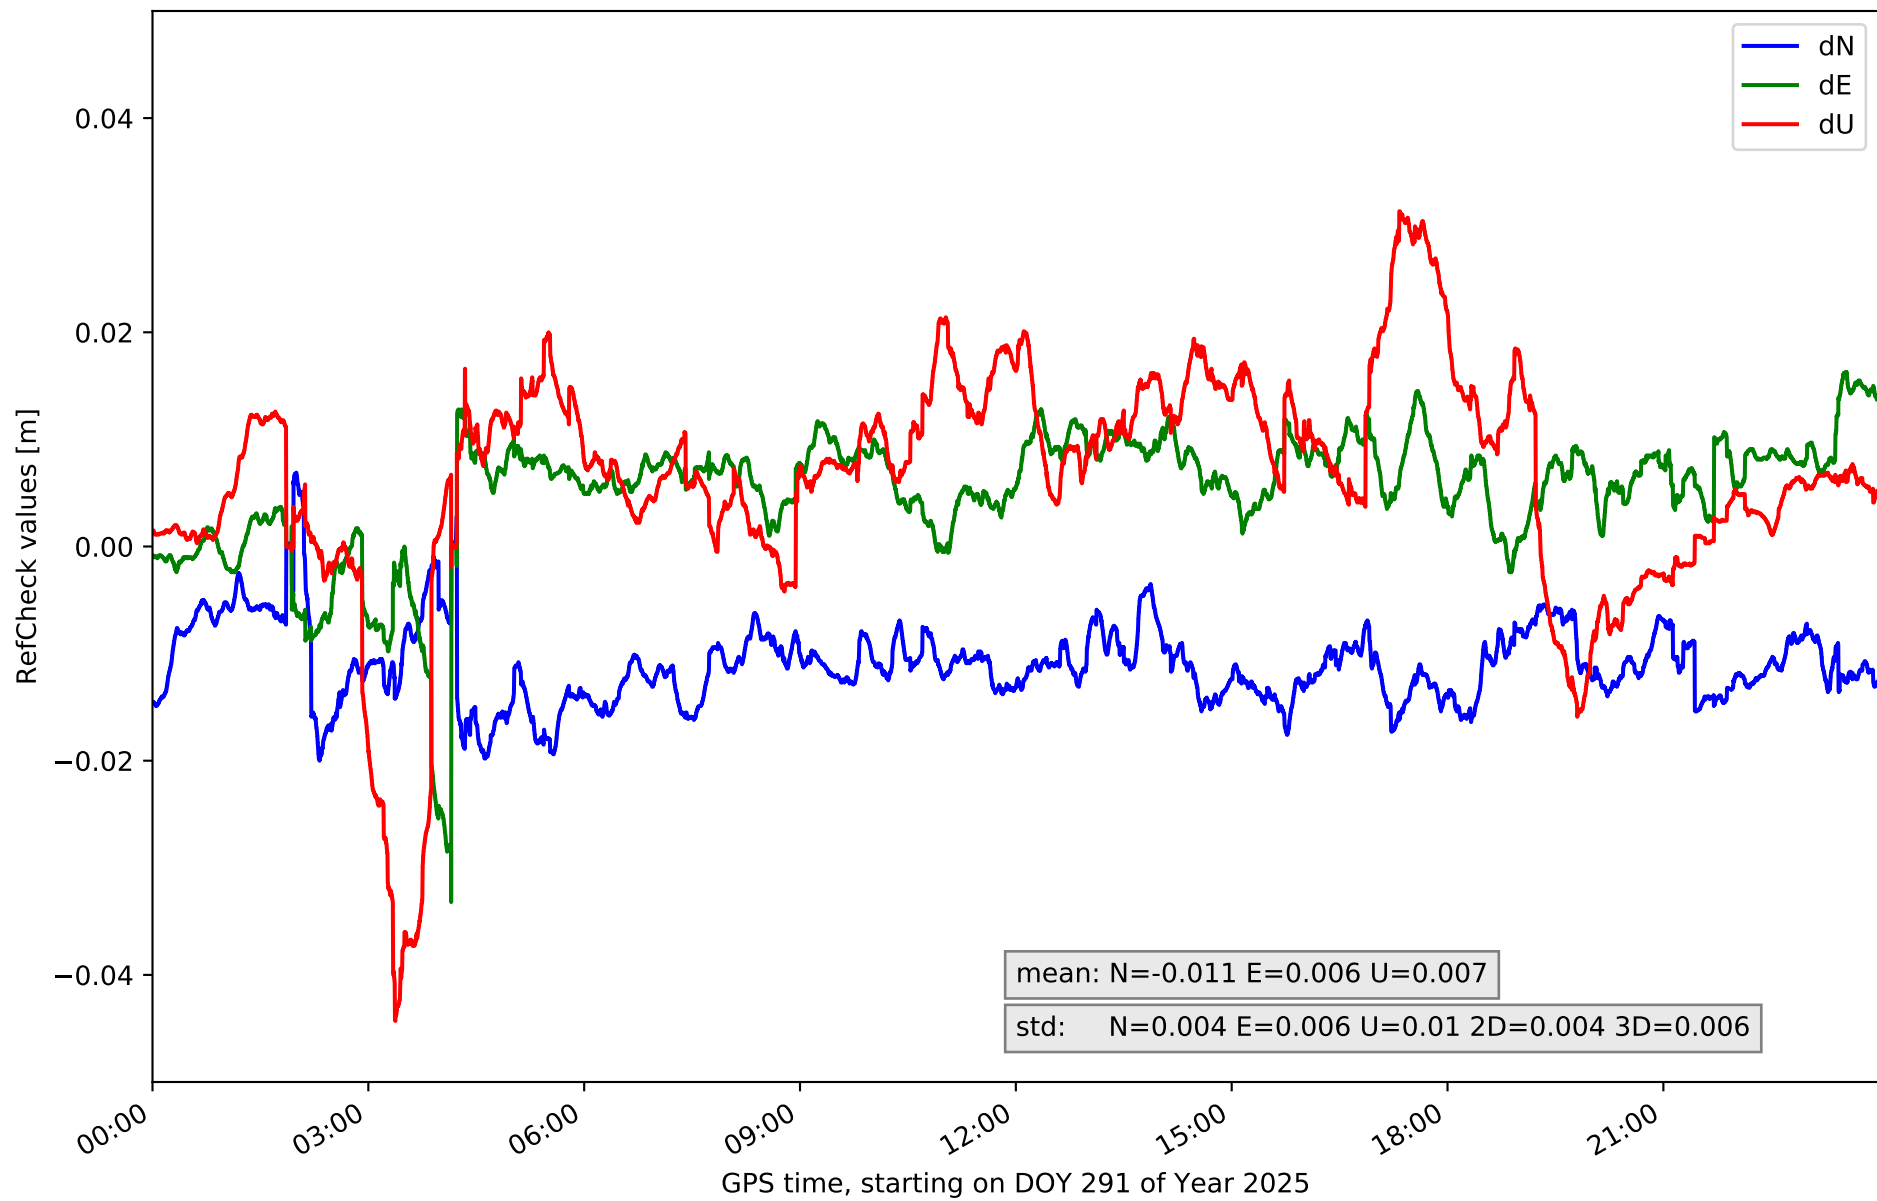


RefCheck for station LP03 in network N32T

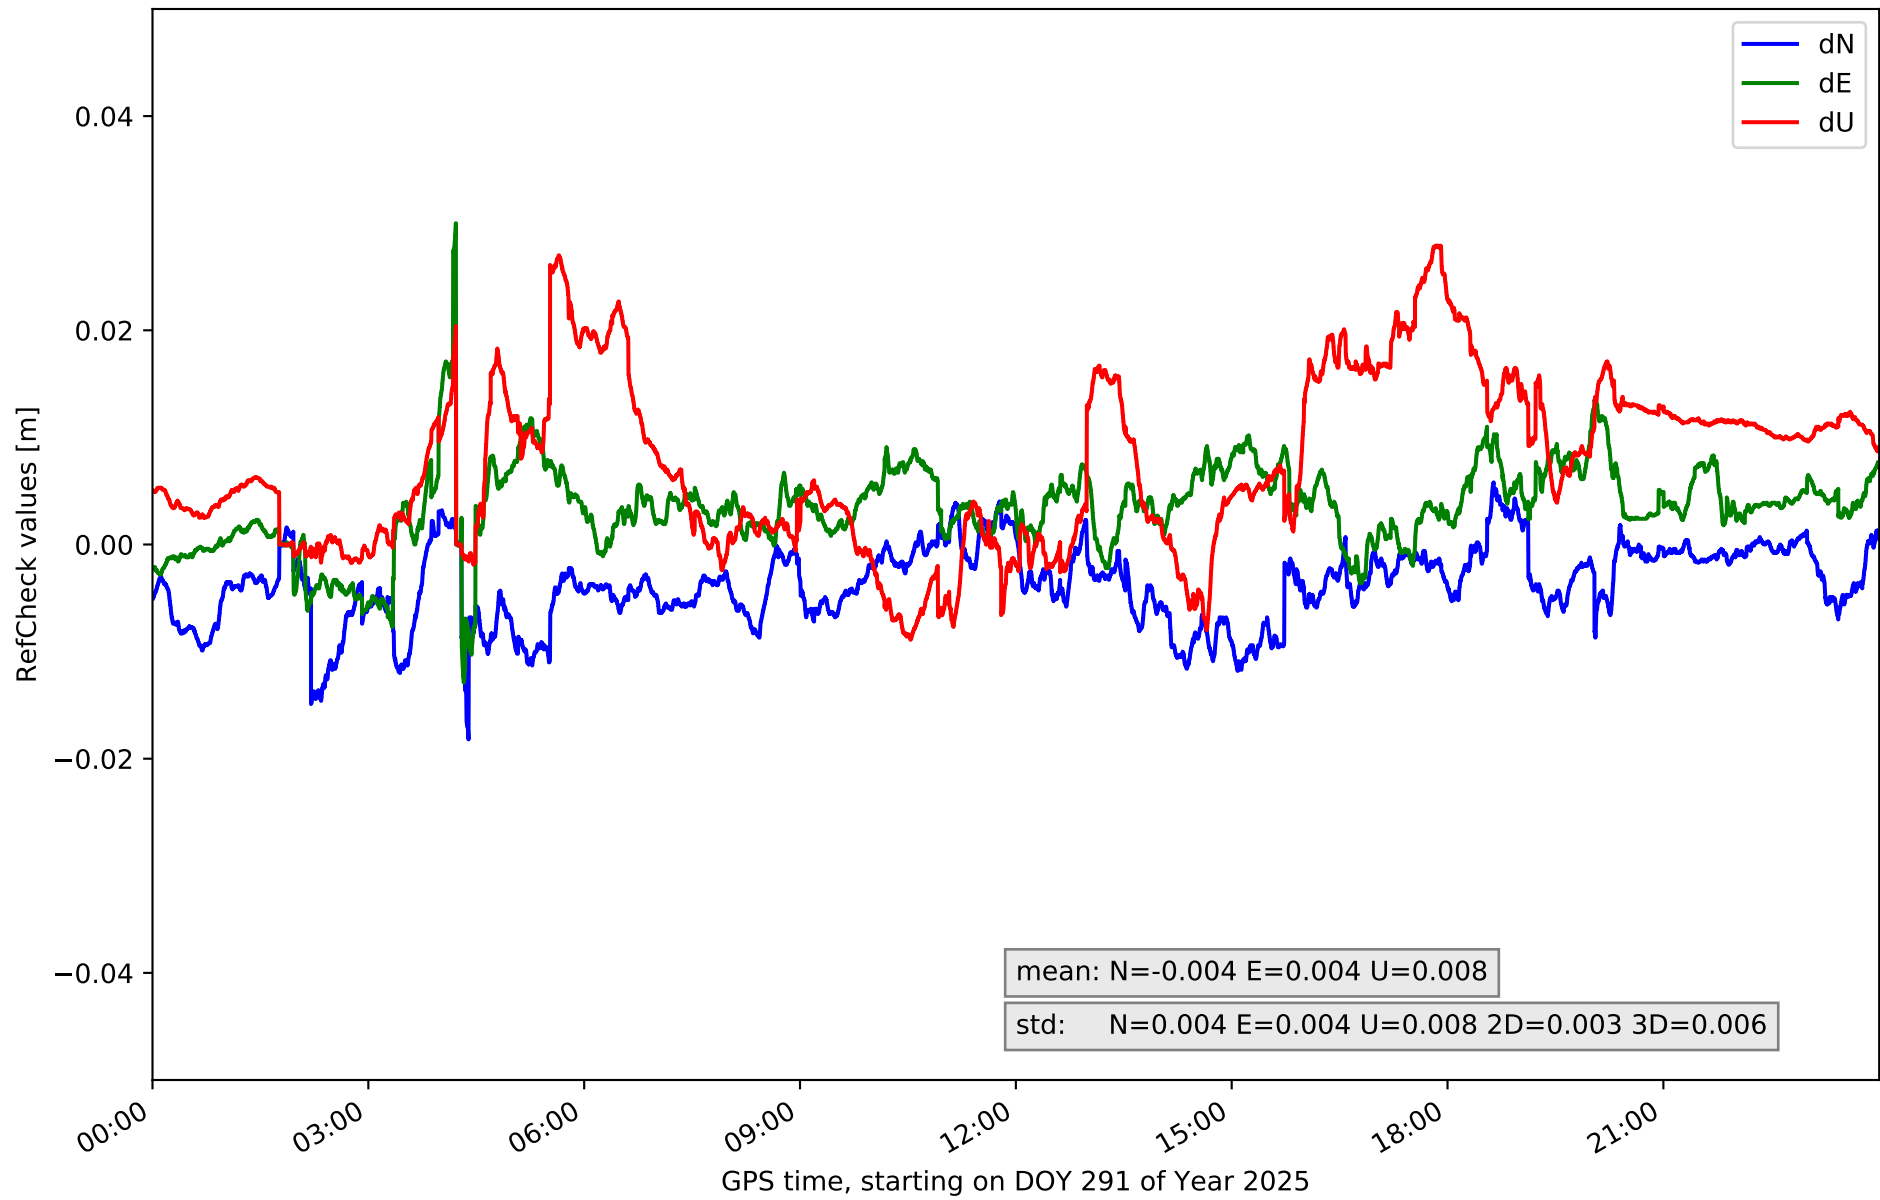


RefCheck for station LPAL in network N32T

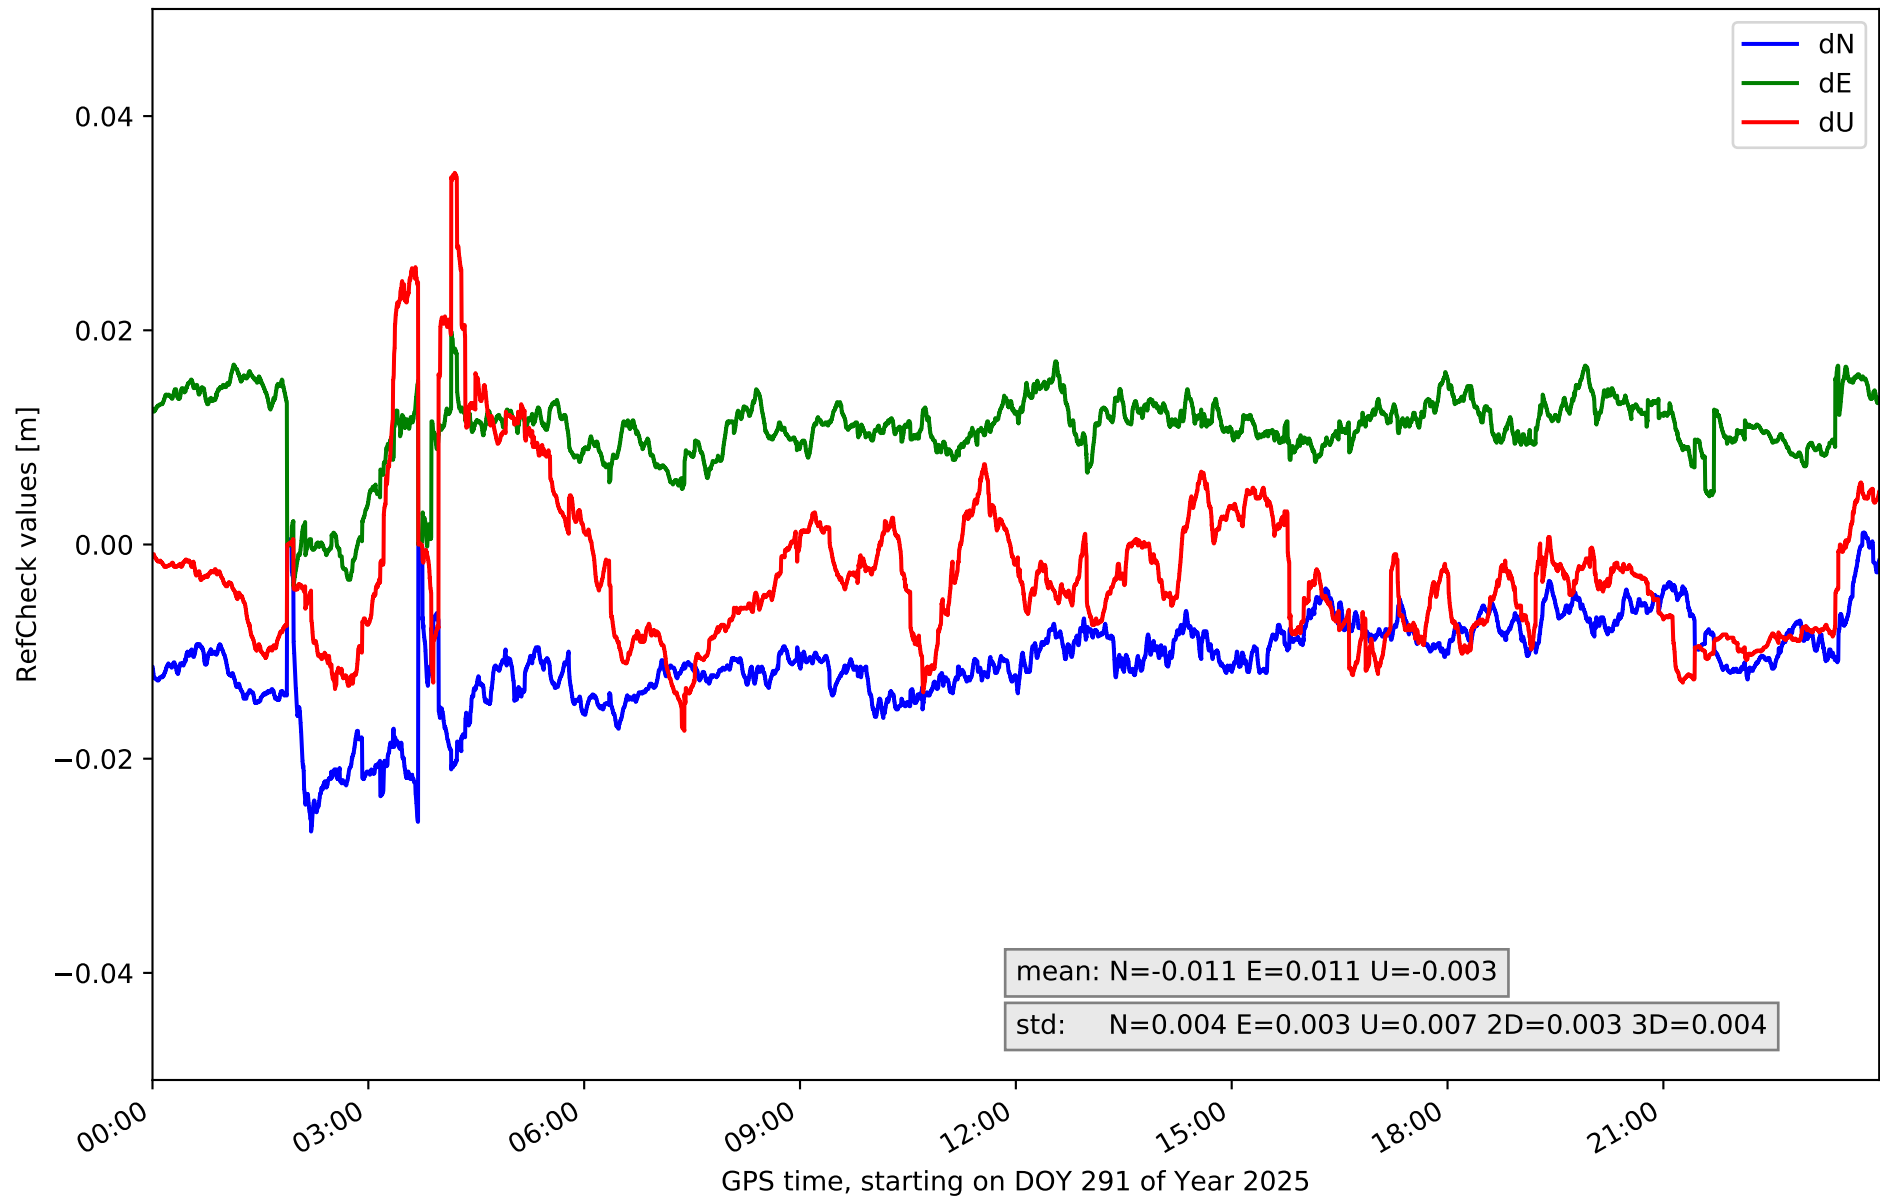


RefCheck for station LRES in network N32T

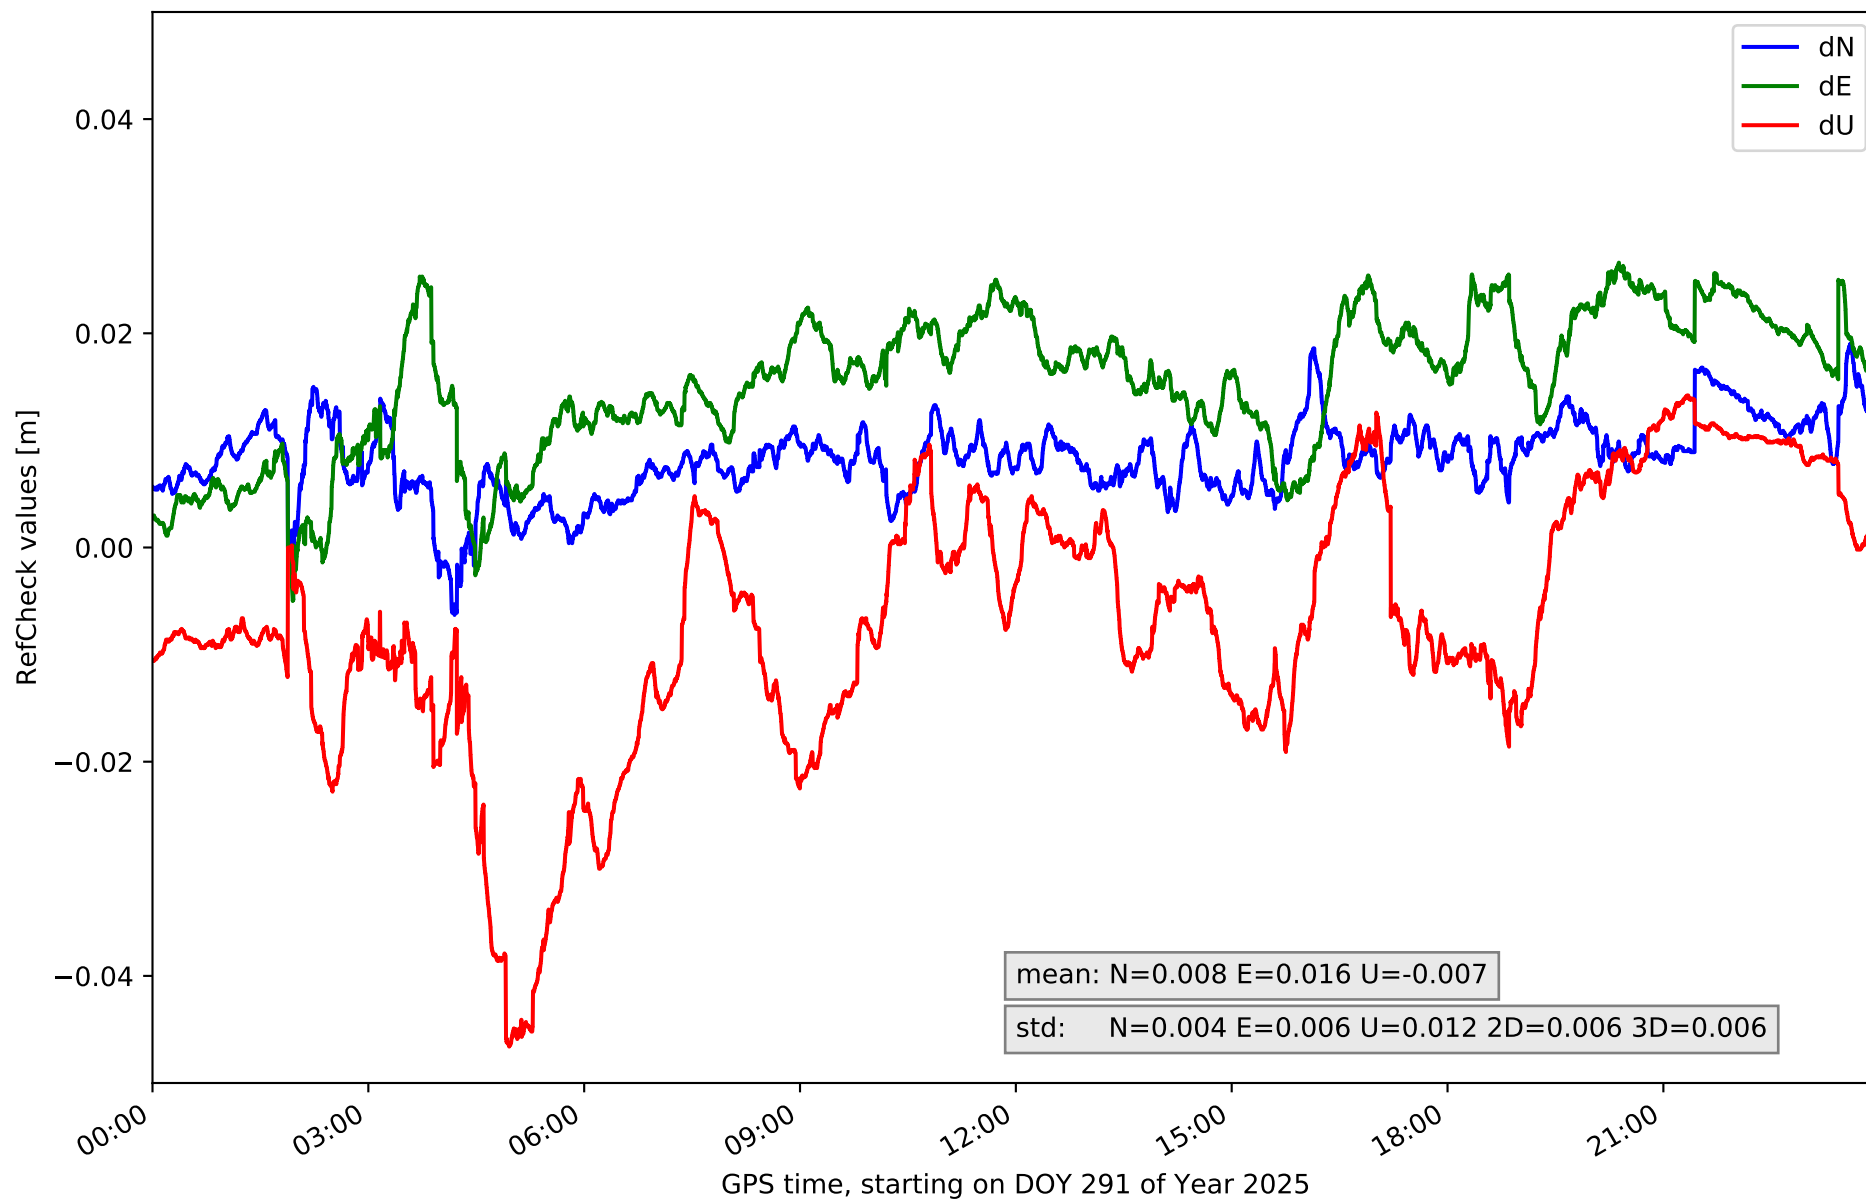


RefCheck for station TN01 in network N32T

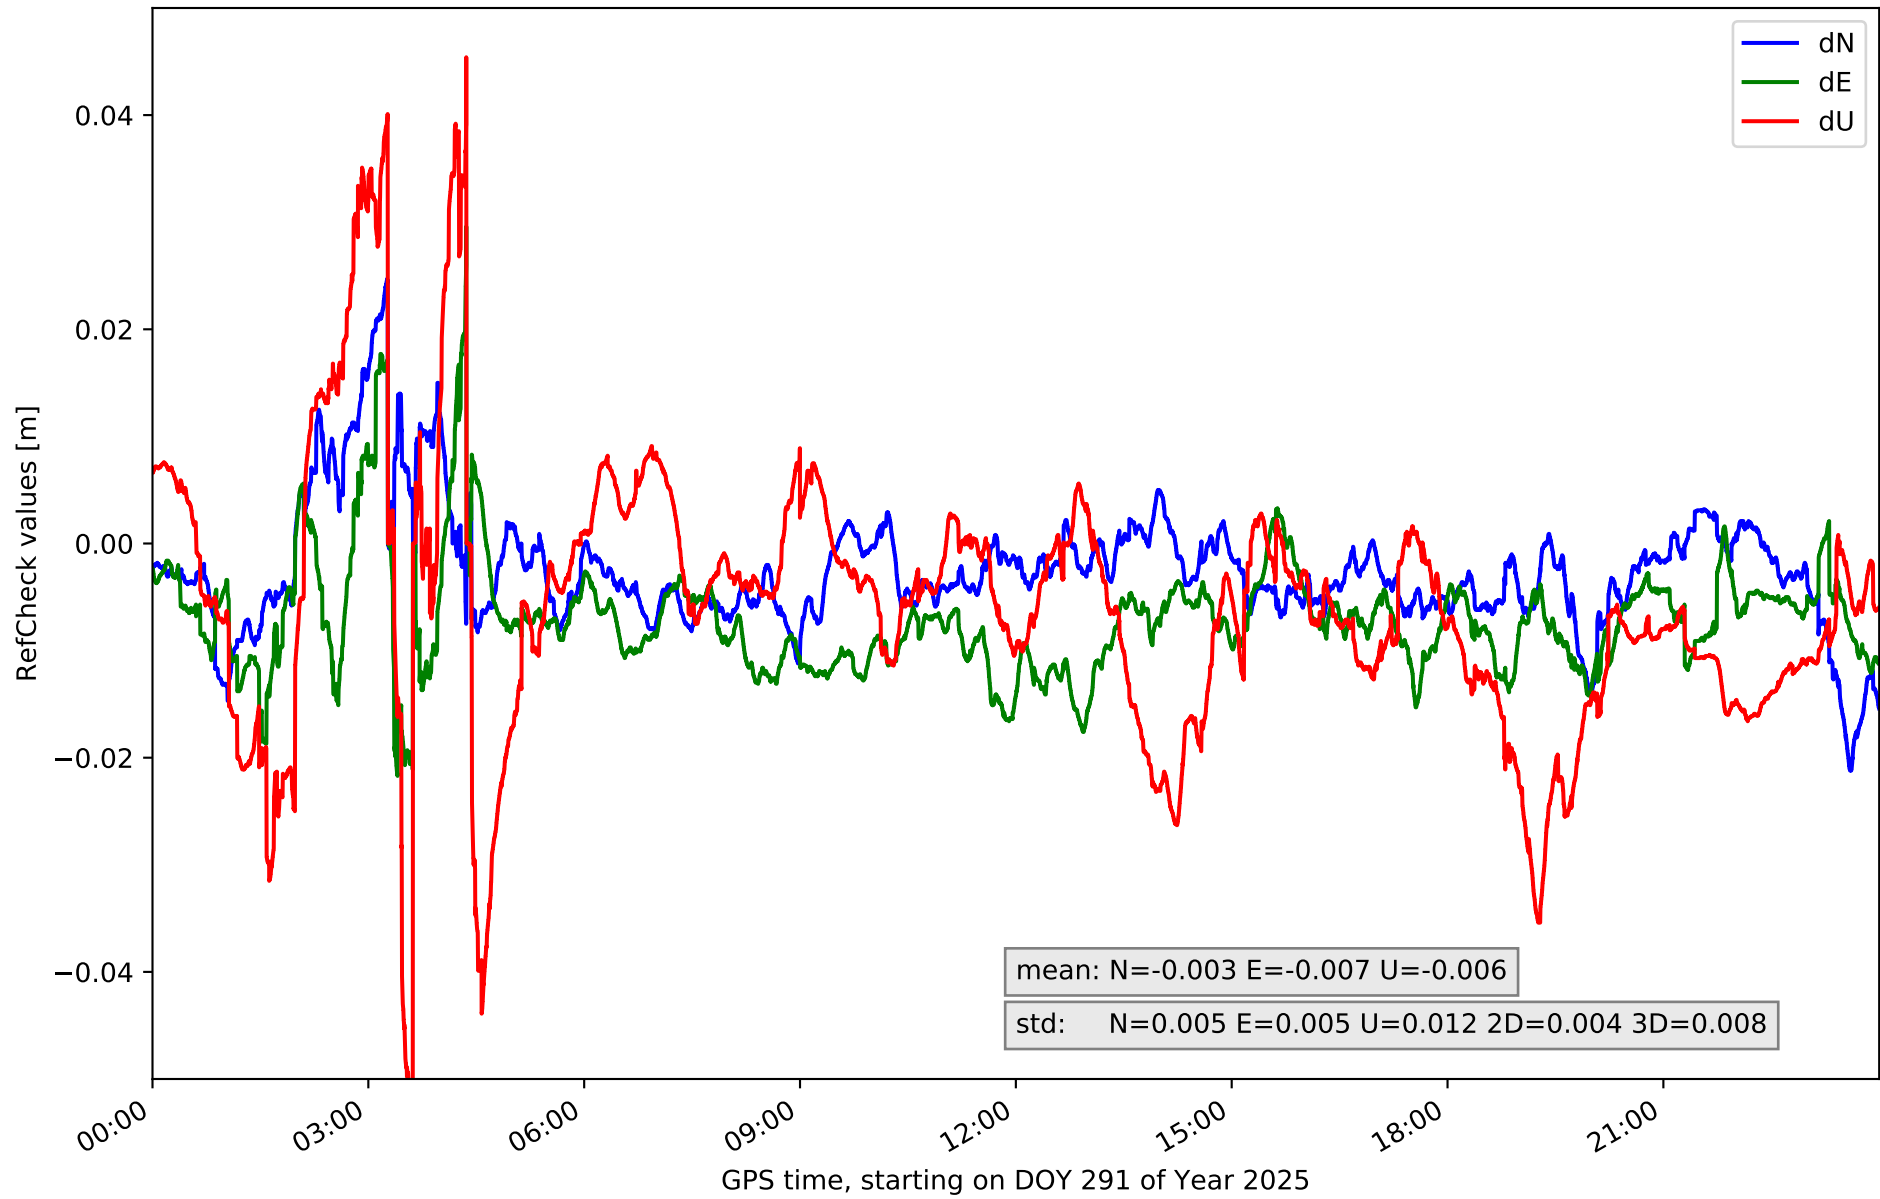


RefCheck for station TN02 in network N32T

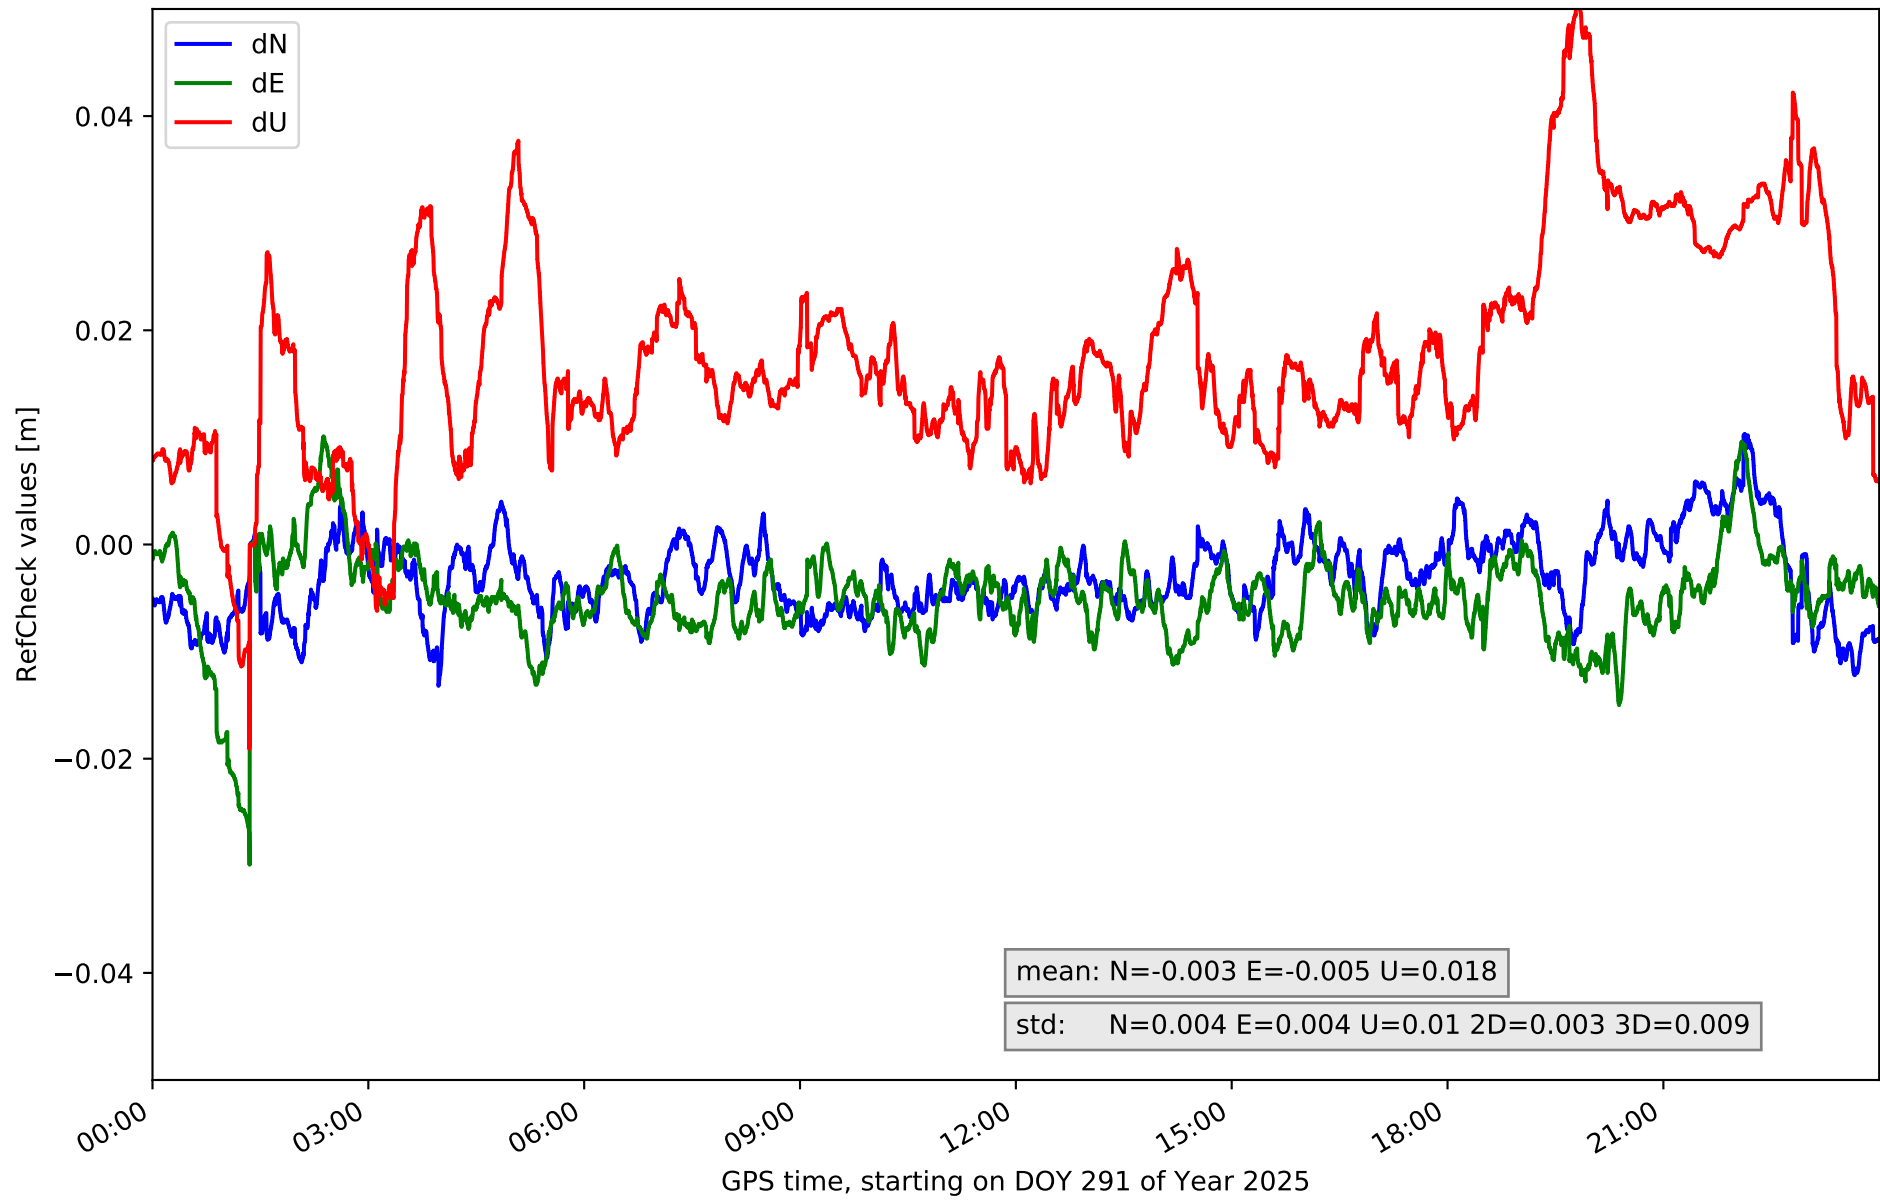


RefCheck for station TN03 in network N32T

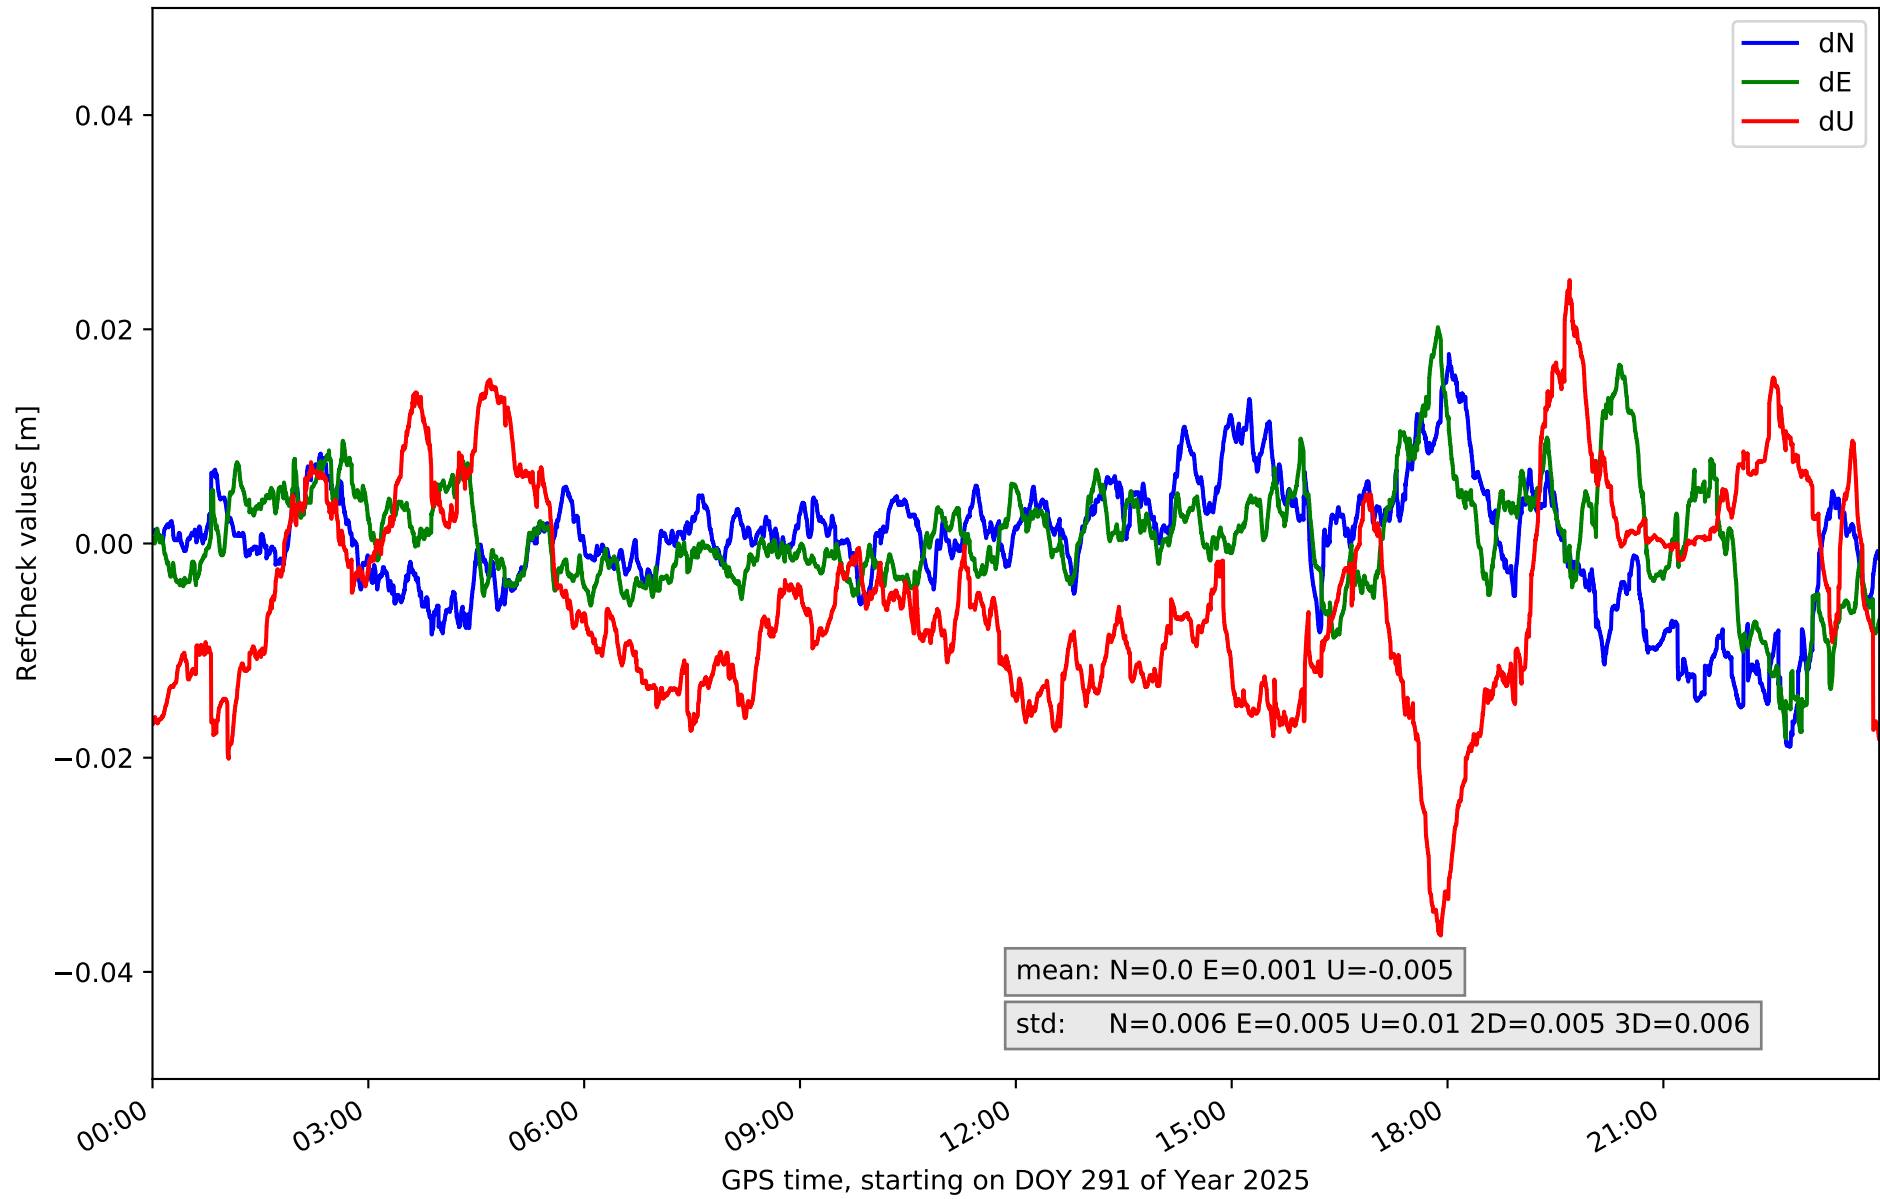


RefCheck for station TN04 in network N32T

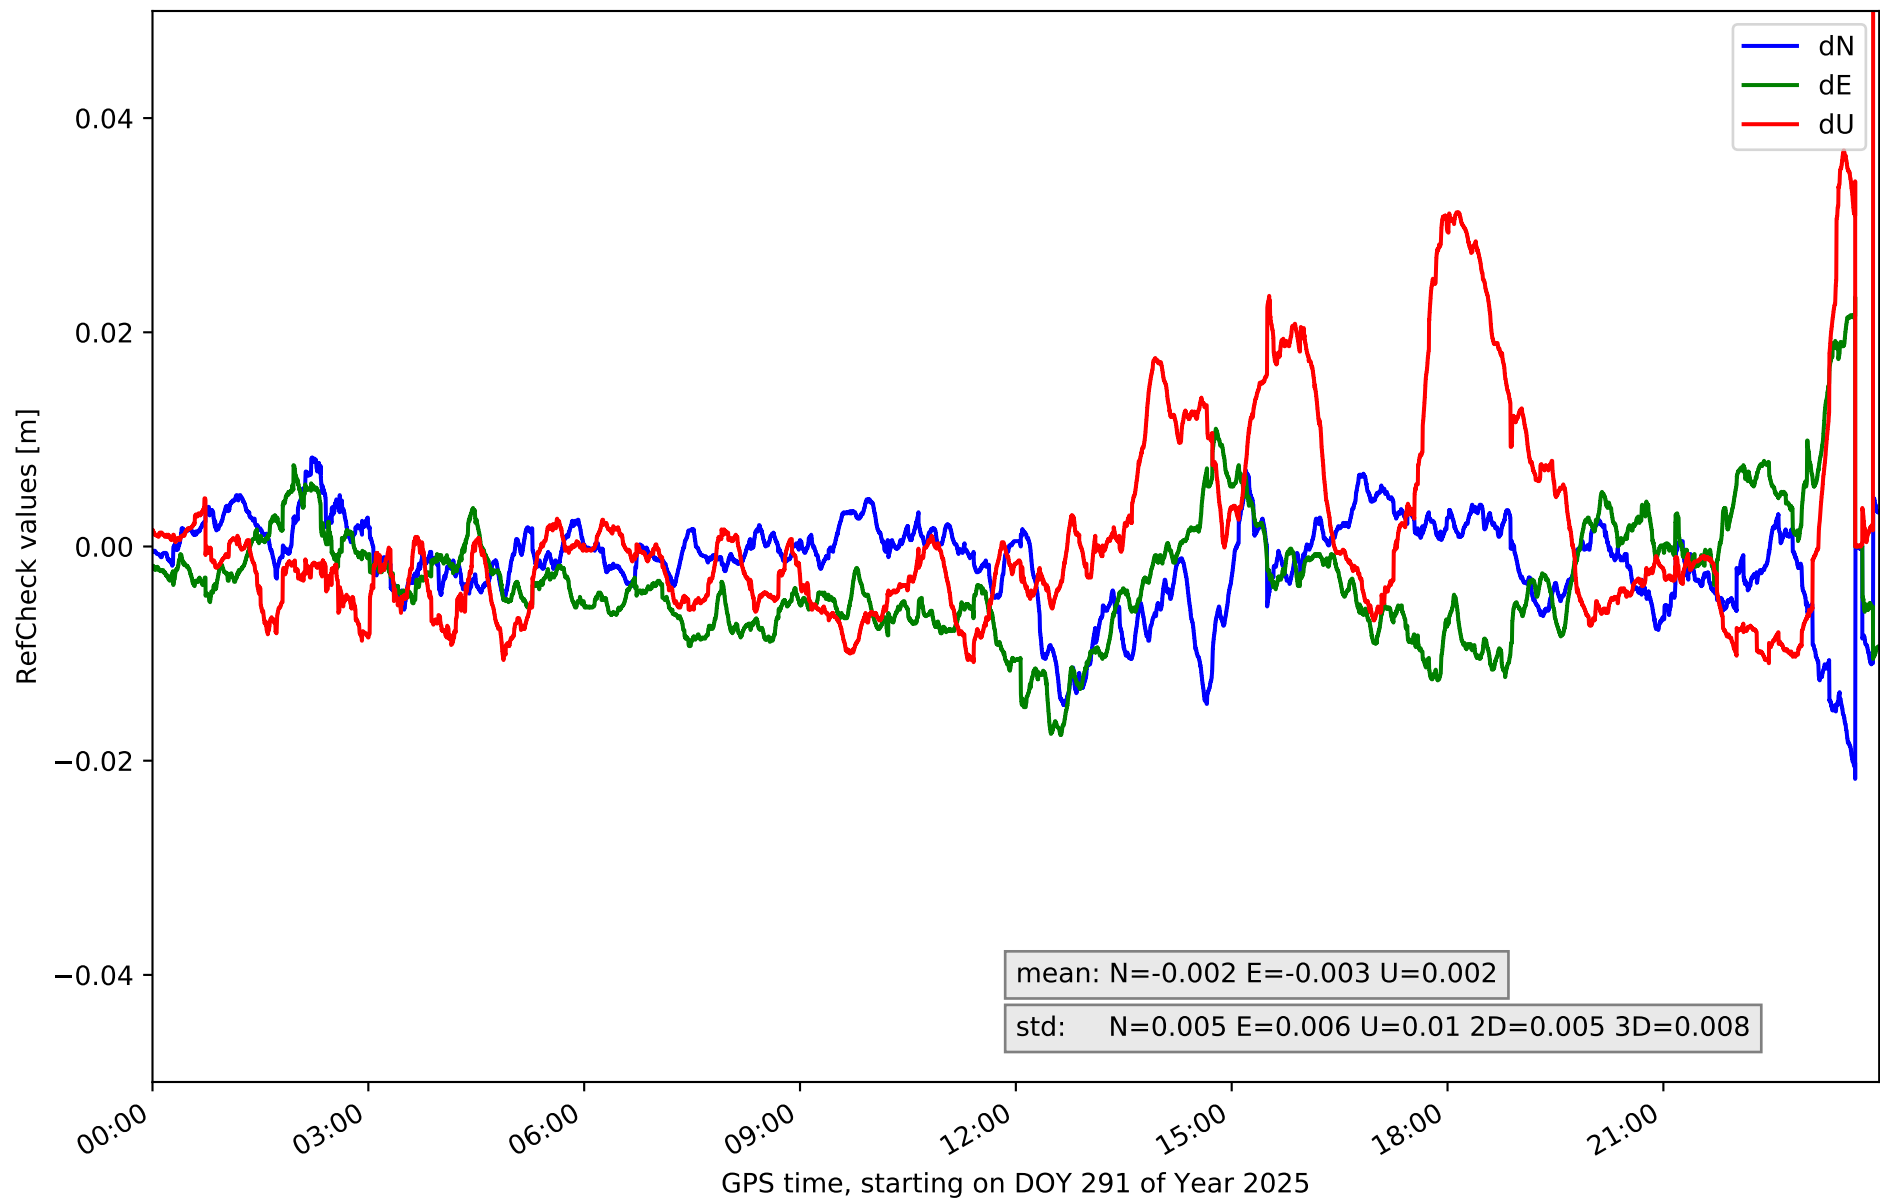


RefCheck for station TN06 in network N32T

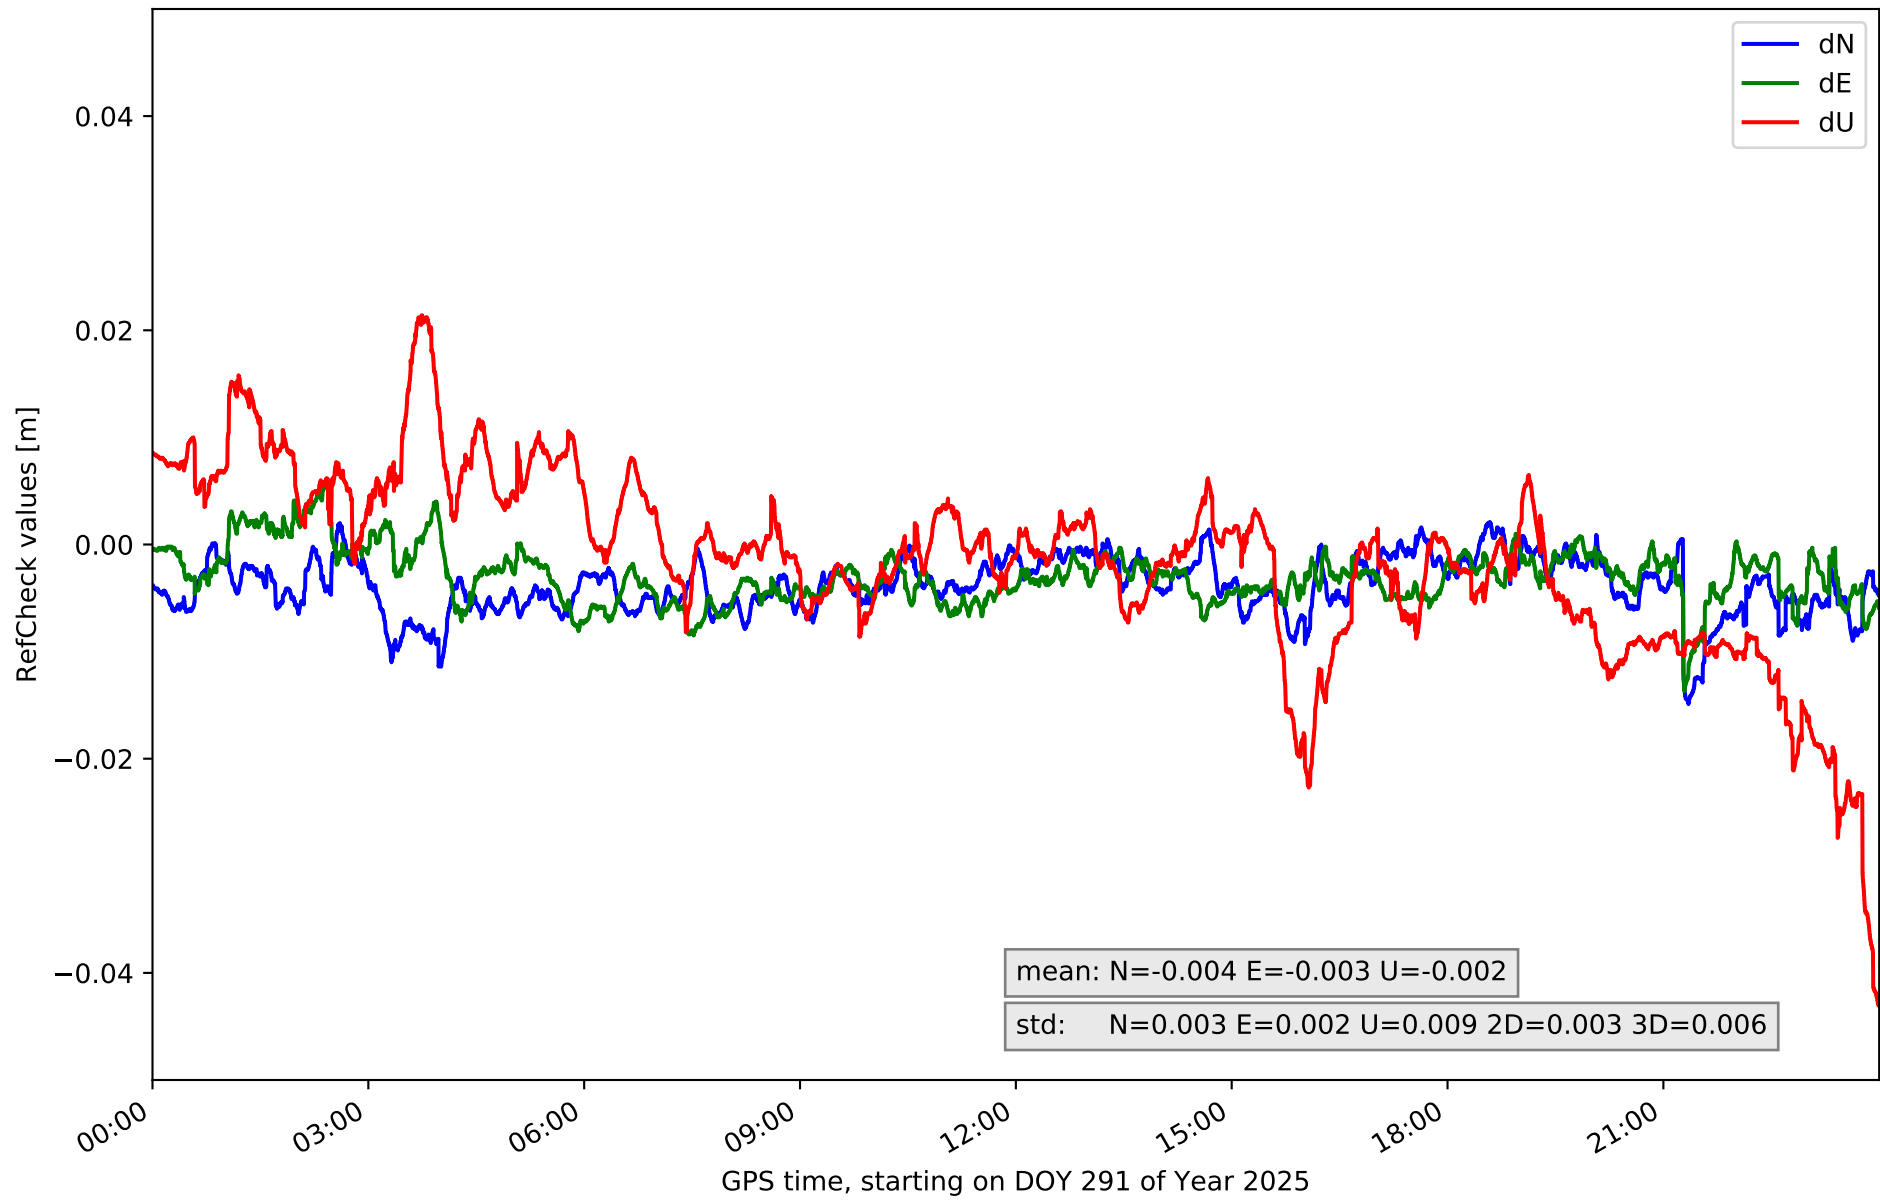

RefCheck for station TN09 in network N32T

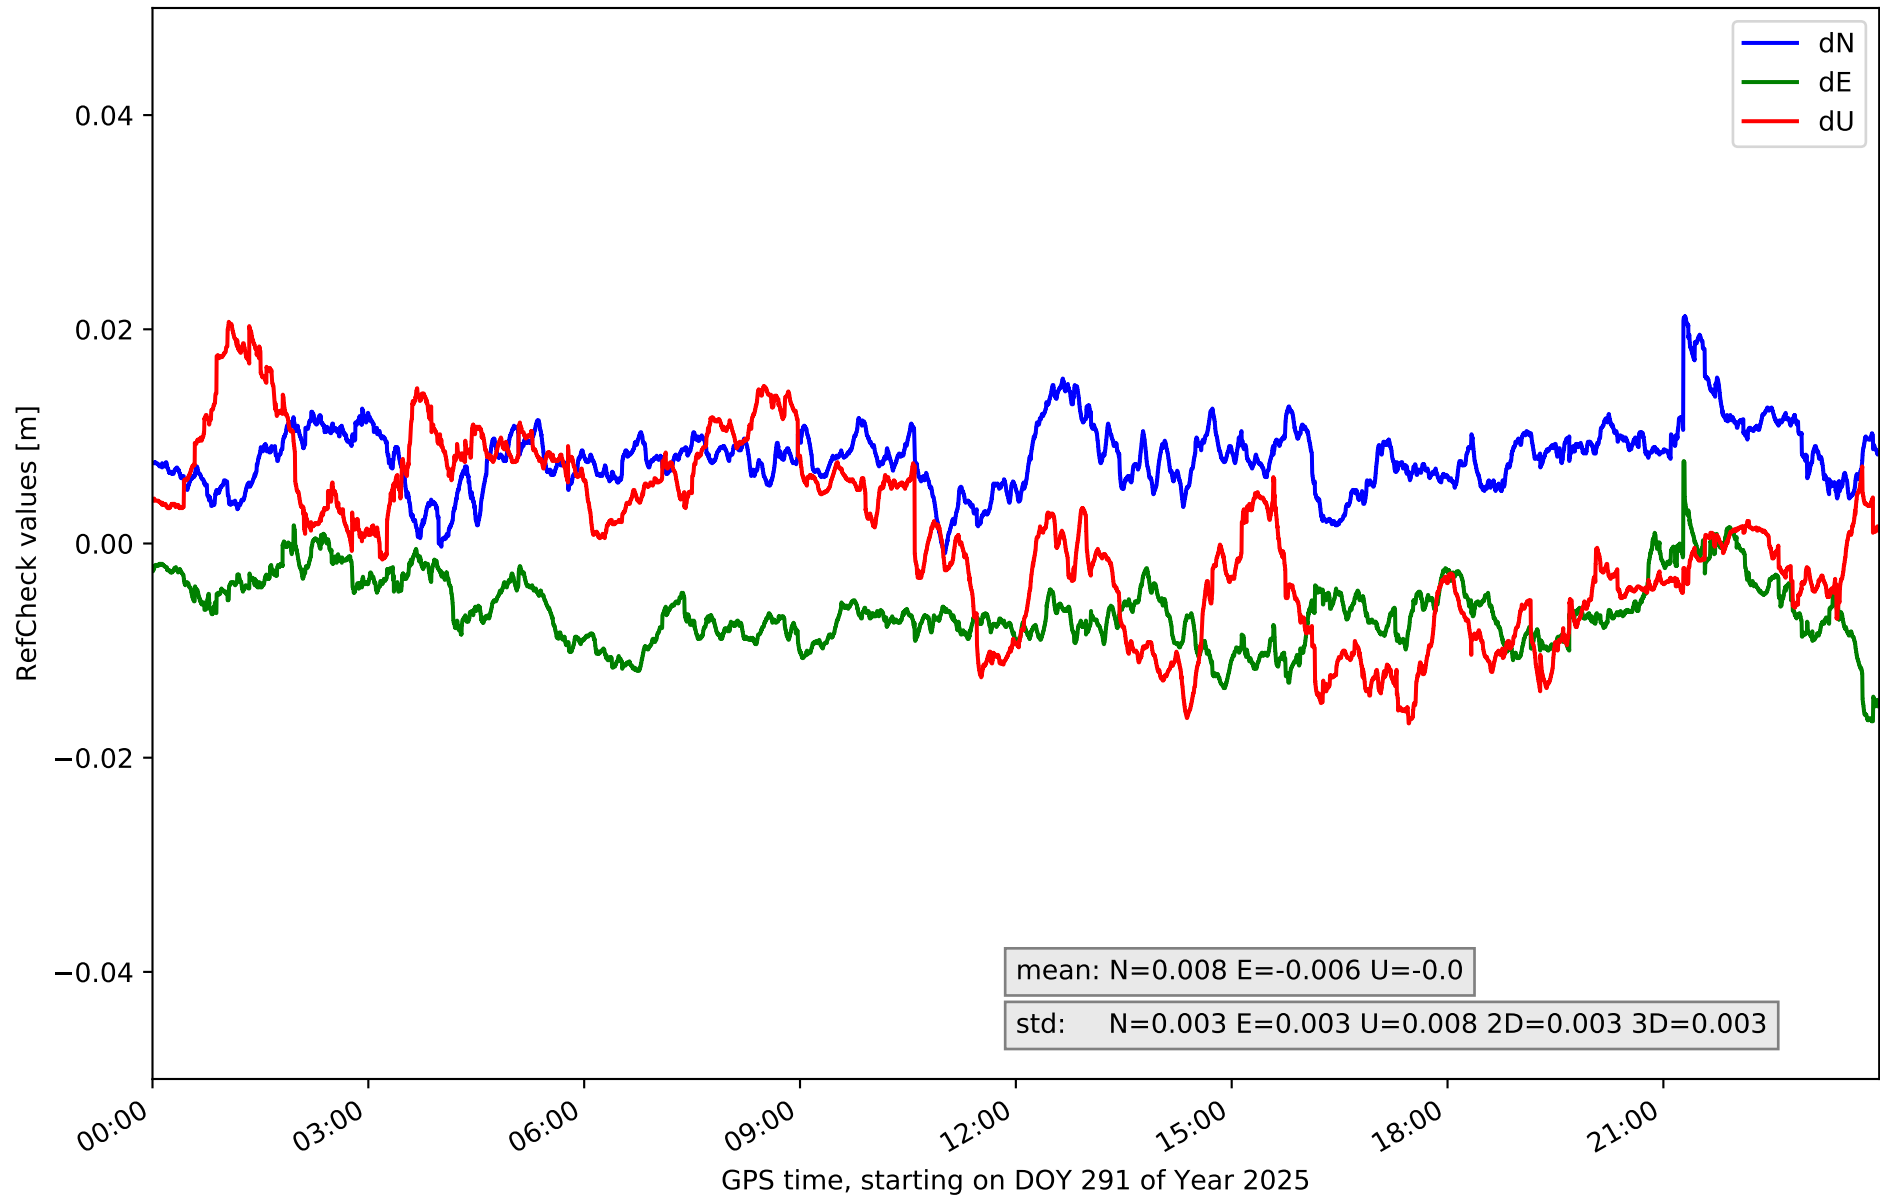

RefCheck for station TE11 in network N32T

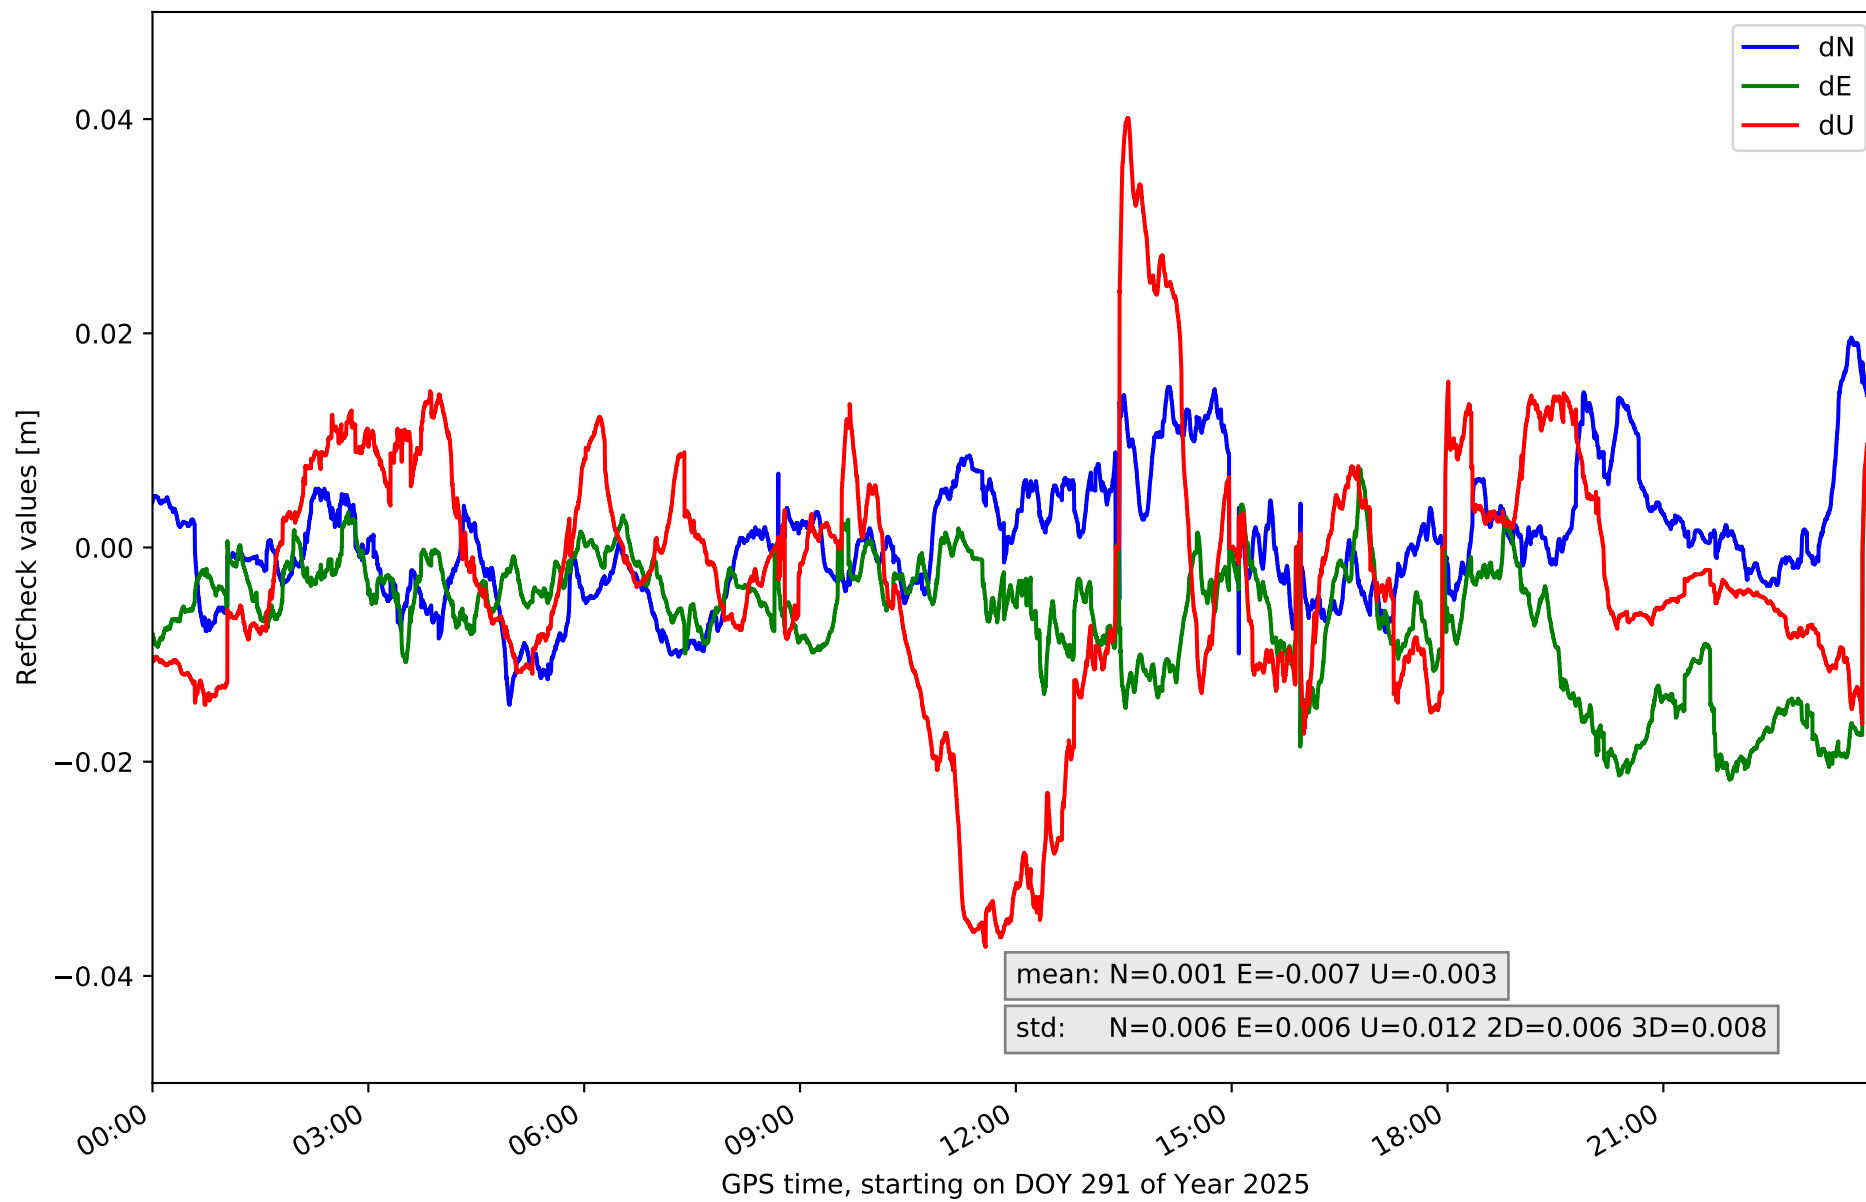

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.013	0.012	0.004	-0.001	0.028	0.005	-0.05	0.021	0.012	0.005	0.007	62196	89.2	27299	39.2
GOM1	-0.022	0.044	0.005	-0.025	0.013	0.006	-0.044	0.024	0.011	0.005	0.008	39803	57.1	18489	26.5
GOME	-0.013	0.022	0.004	-0.026	0.029	0.005	-0.029	0.026	0.009	0.004	0.007	9126	13.1	10060	14.4
IZAN	-0.013	0.008	0.003	-0.014	0.007	0.004	-0.02	0.012	0.005	0.002	0.003	3375	4.8	363	0.5
LP01	-0.02	0.007	0.004	-0.033	0.016	0.006	-0.044	0.031	0.01	0.004	0.006	59280	85.1	19866	28.5
LP03	-0.018	0.006	0.004	-0.013	0.03	0.004	-0.009	0.028	0.008	0.003	0.006	11254	16.1	6713	9.6
LPAL	-0.027	0.001	0.004	-0.004	0.02	0.003	-0.017	0.035	0.007	0.003	0.004	68341	98.1	10072	14.5
LRES	-0.006	0.019	0.004	-0.005	0.027	0.006	-0.047	0.014	0.012	0.006	0.006	62441	89.6	47573	68.3
TN01	-0.021	0.025	0.005	-0.022	0.03	0.005	-0.06	0.045	0.012	0.004	0.008	28675	41.1	14087	20.2
TN02	-0.013	0.01	0.004	-0.03	0.01	0.004	-0.019	0.051	0.01	0.003	0.009	11473	16.5	27926	40.1
TN03	-0.019	0.018	0.006	-0.018	0.02	0.005	-0.037	0.025	0.01	0.005	0.006	13101	18.8	4722	6.8
TN04	-0.022	0.008	0.005	-0.018	0.023	0.006	-0.011	0.052	0.01	0.005	0.008	11730	16.8	6863	9.8
TN06	-0.015	0.002	0.003	-0.014	0.005	0.002	-0.043	0.021	0.009	0.003	0.006	1430	2.1	4303	6.2
TN09	-0.001	0.021	0.003	-0.017	0.008	0.003	-0.017	0.021	0.008	0.003	0.003	43327	62.2	540	0.8
TE11	-0.015	0.02	0.006	-0.022	0.009	0.006	-0.037	0.04	0.012	0.006	0.008	26322	37.8	14464	20.8
Mean	-0.016	0.015	0.004	-0.017	0.018	0.005	-0.032	0.03	0.01	0.004	0.006	30124.9	43.2	14222.7	20.4
Min/Max	-0.027	0.044	0.006	-0.033	0.03	0.006	-0.06	0.052	0.012	0.006	0.009	68341	98.1	47573	68.3

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	79.2	72.9	80.5	86.3	84.4
considering satellites with dual-frequency fixed	73.4	62.8	75.4	79.5	79.9
considering all signals separately	72.1	59.0	75.4	79.6	80.2