

summary for network NT32

timeperiod chosen: from 2025-11-26-00:00:00 until 2025-11-26-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.5 seconds


average fixing percentage with threshold set to 0.3: 94.3 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

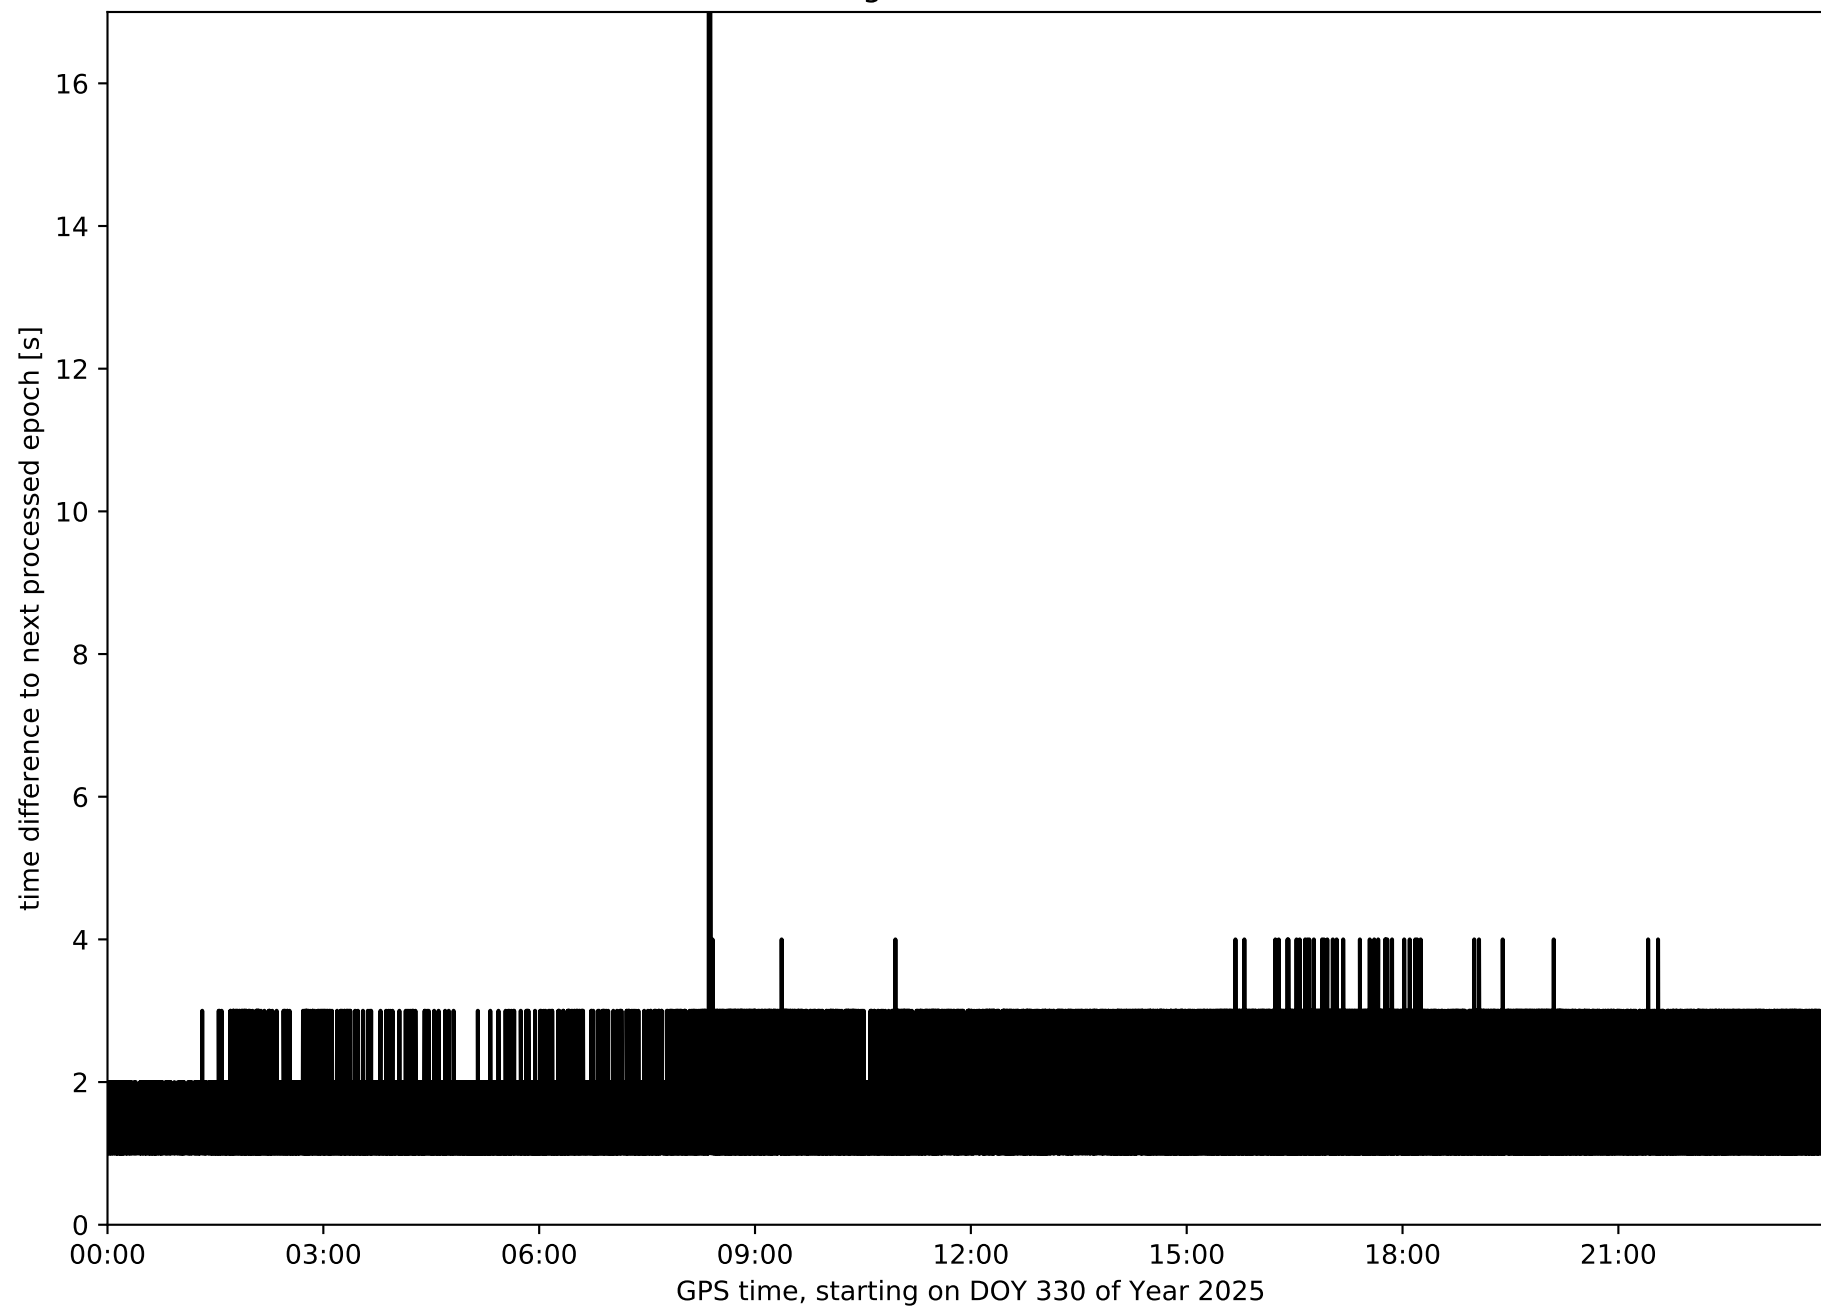


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

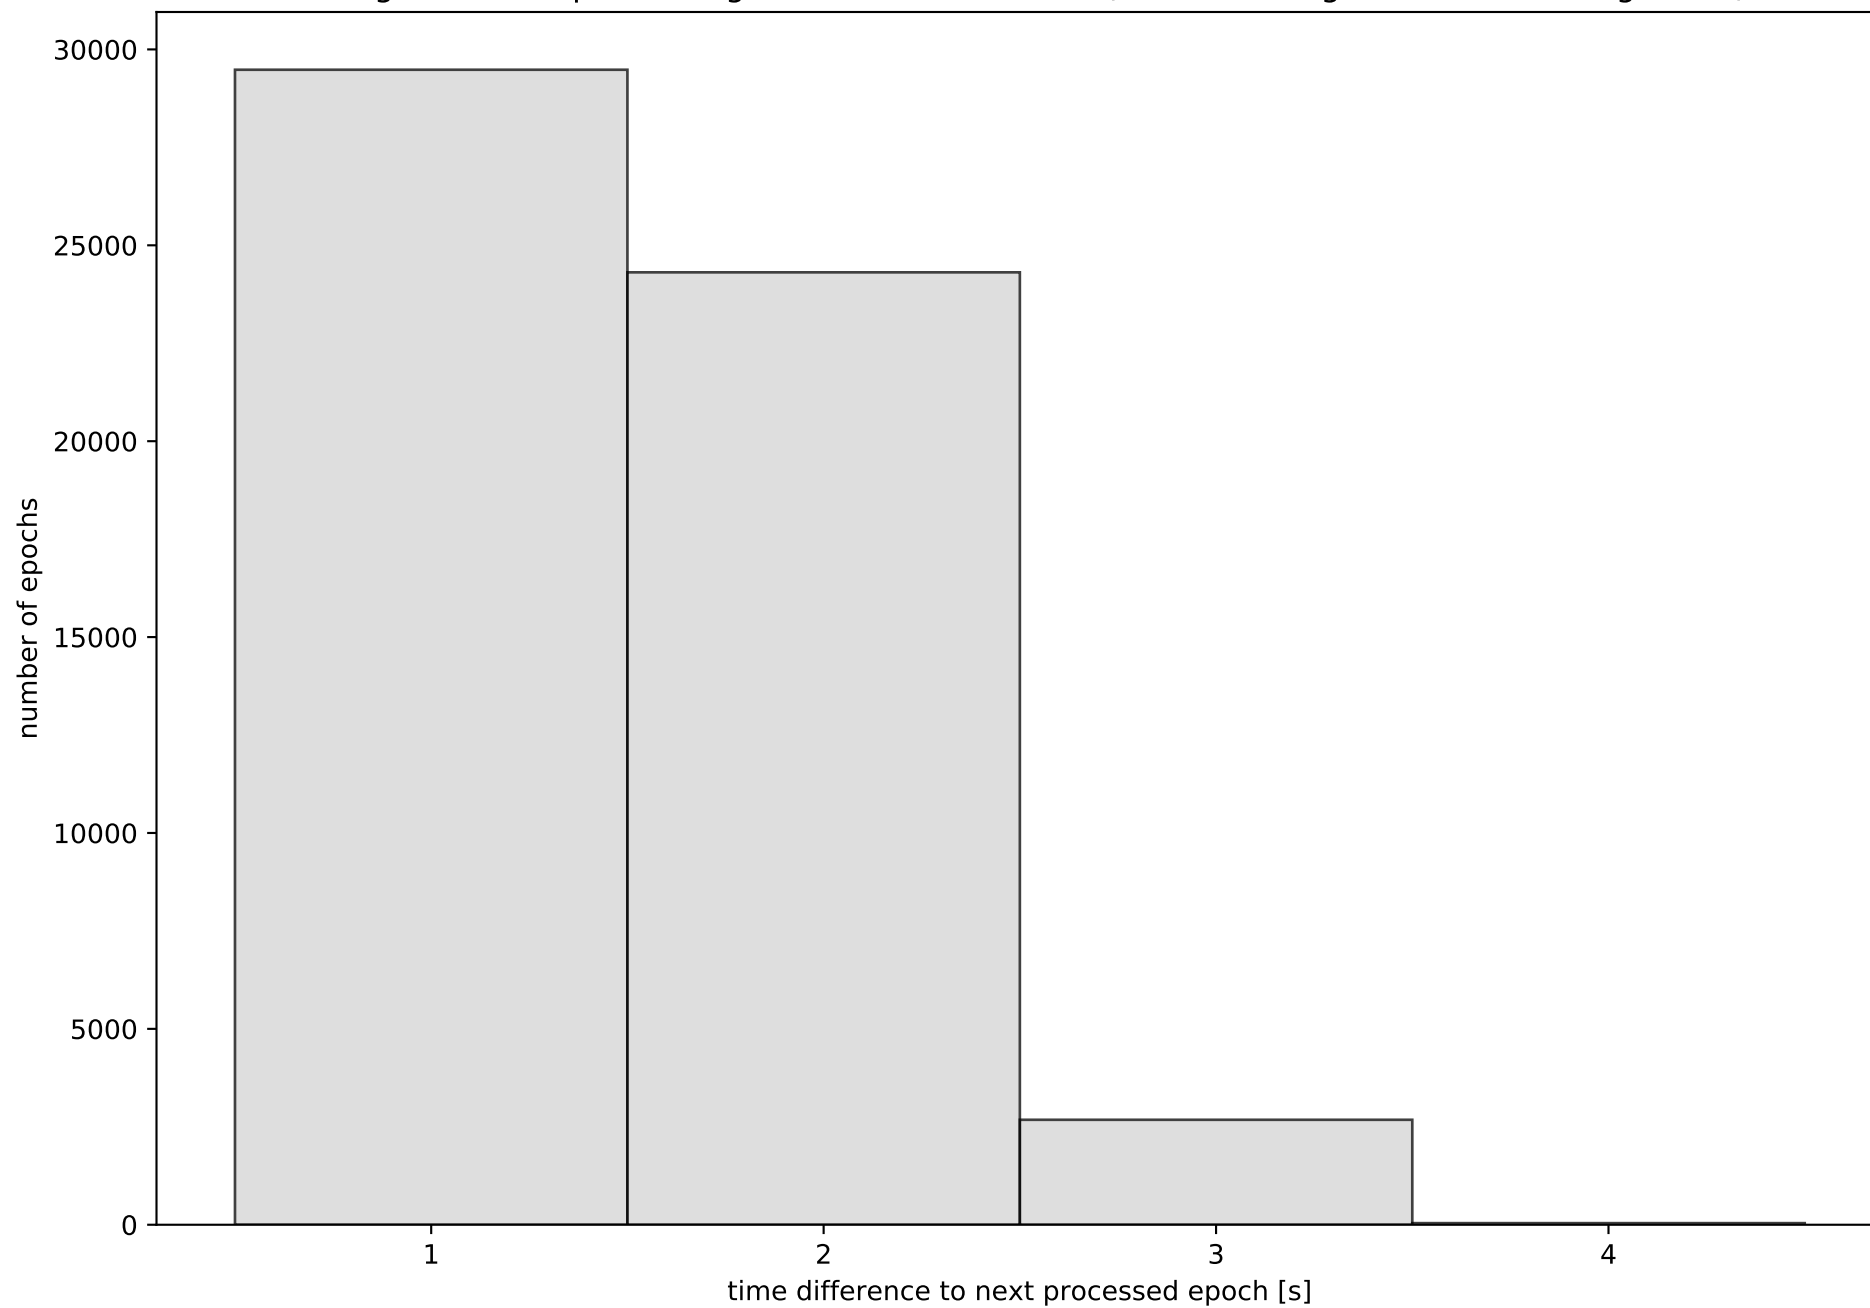


Network NT32 with threshold set to 0.3

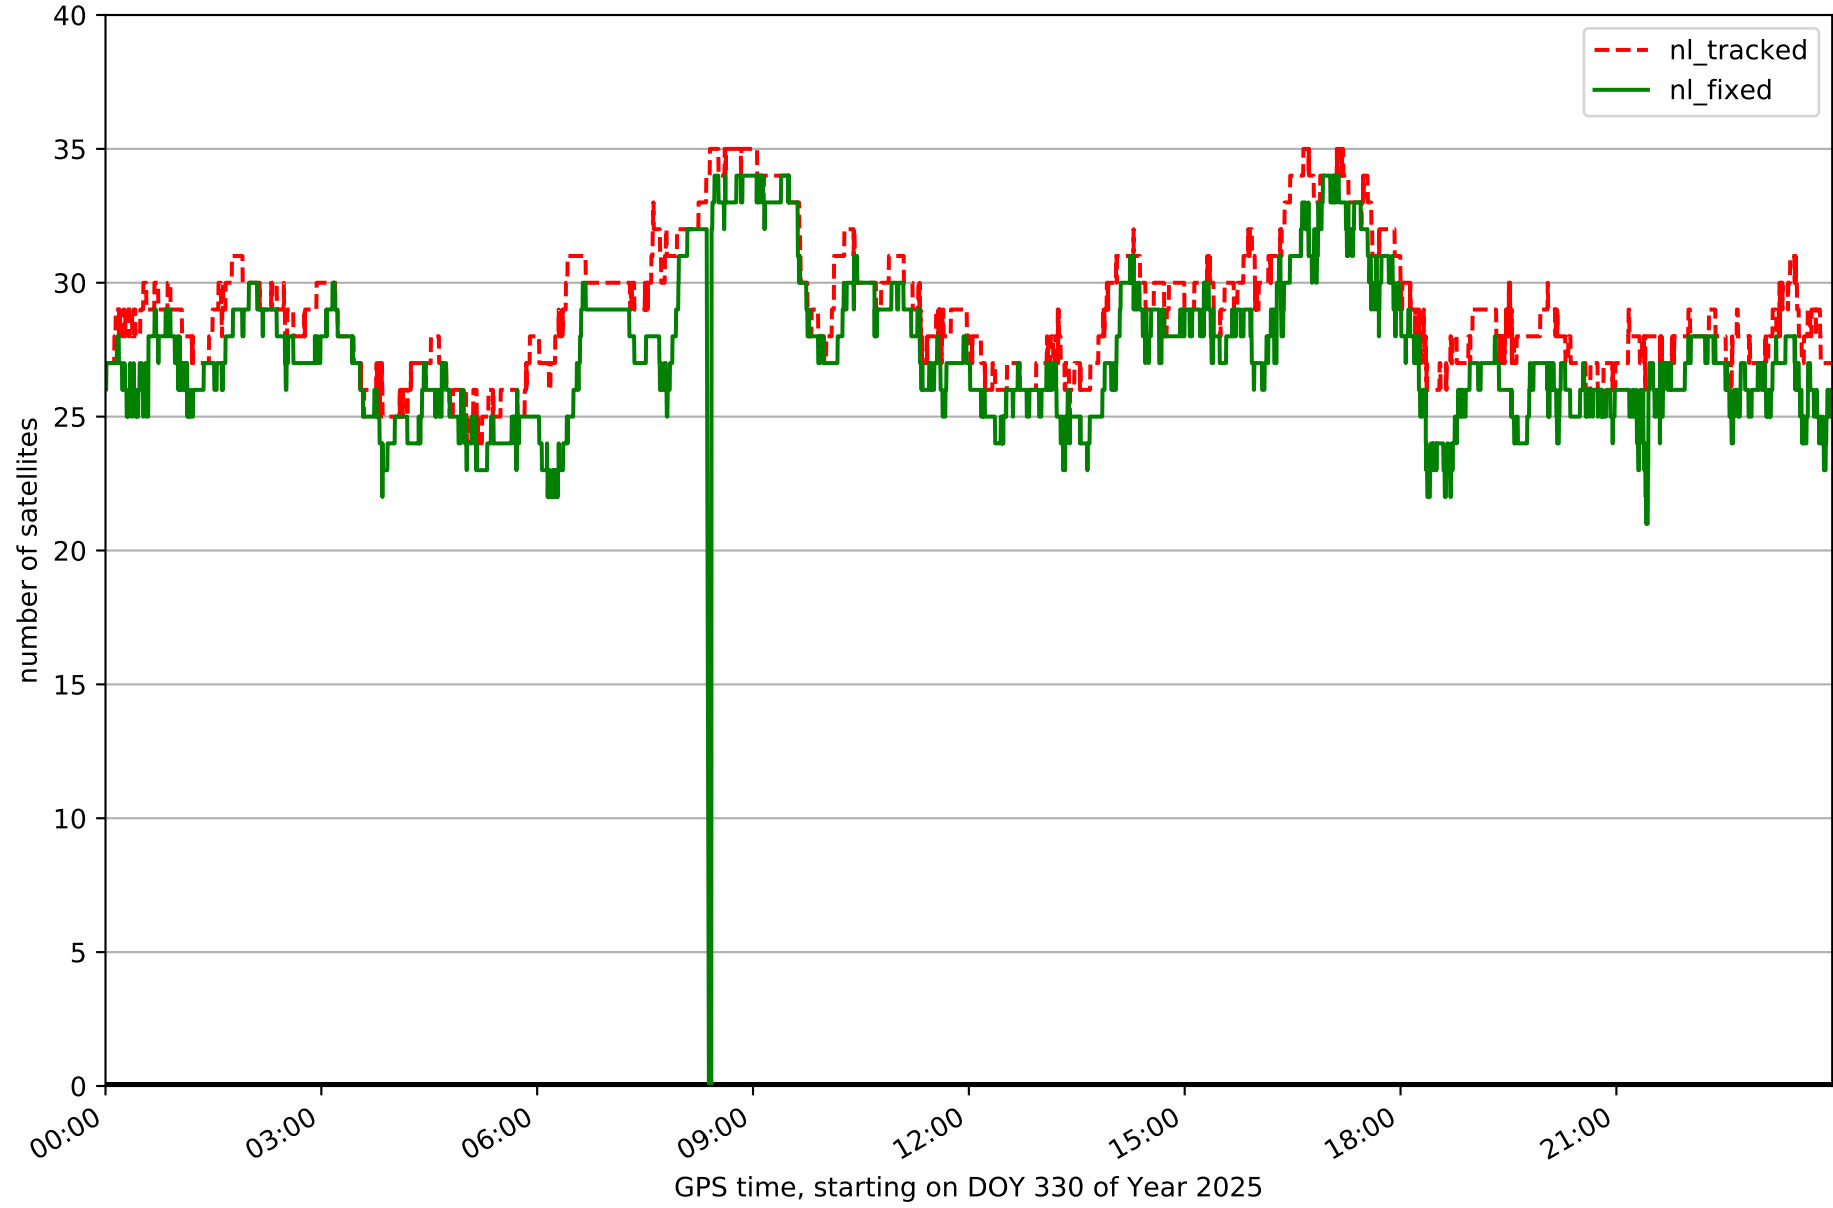


Fixing percentage of satellites in network NT32 with threshold set to 0.3

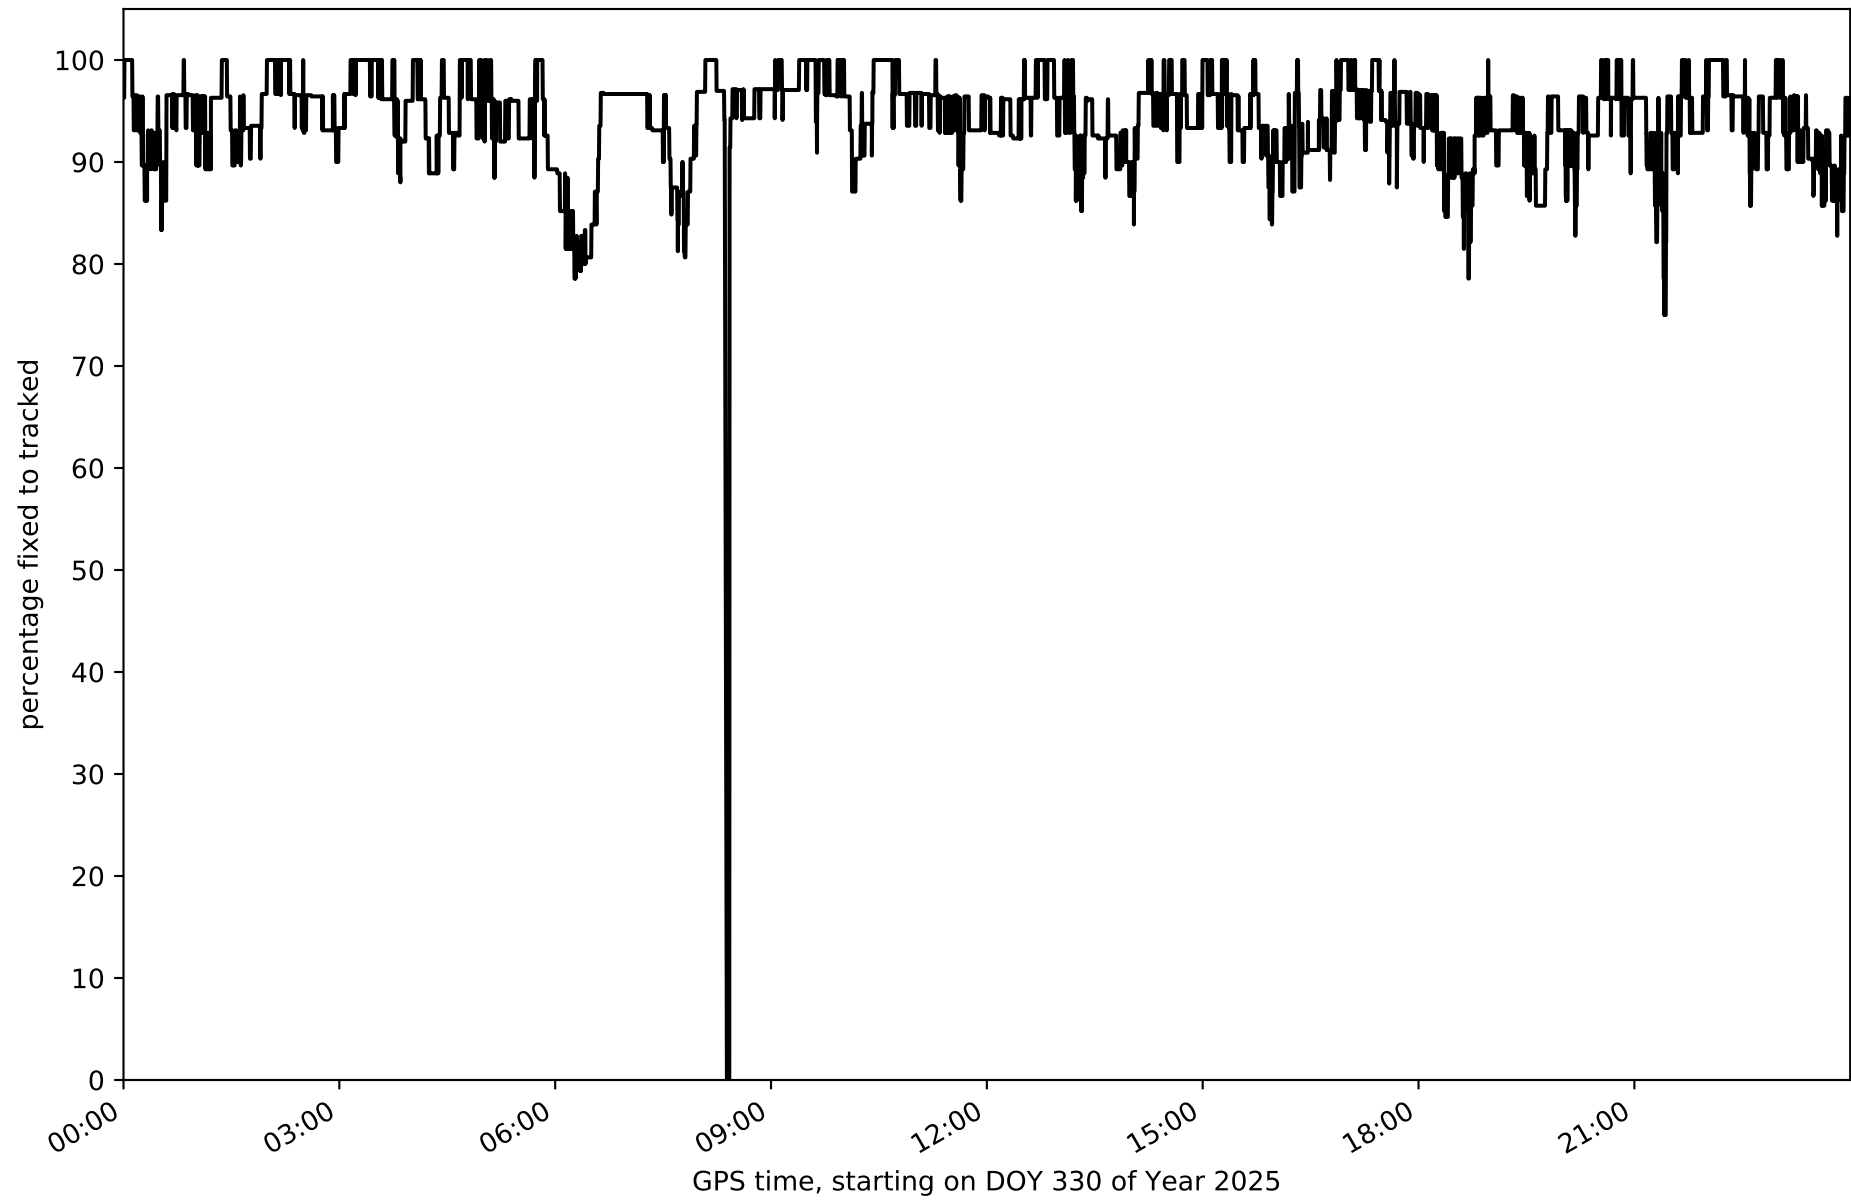


Network NT32 - only GPS with threshold set to 0.3

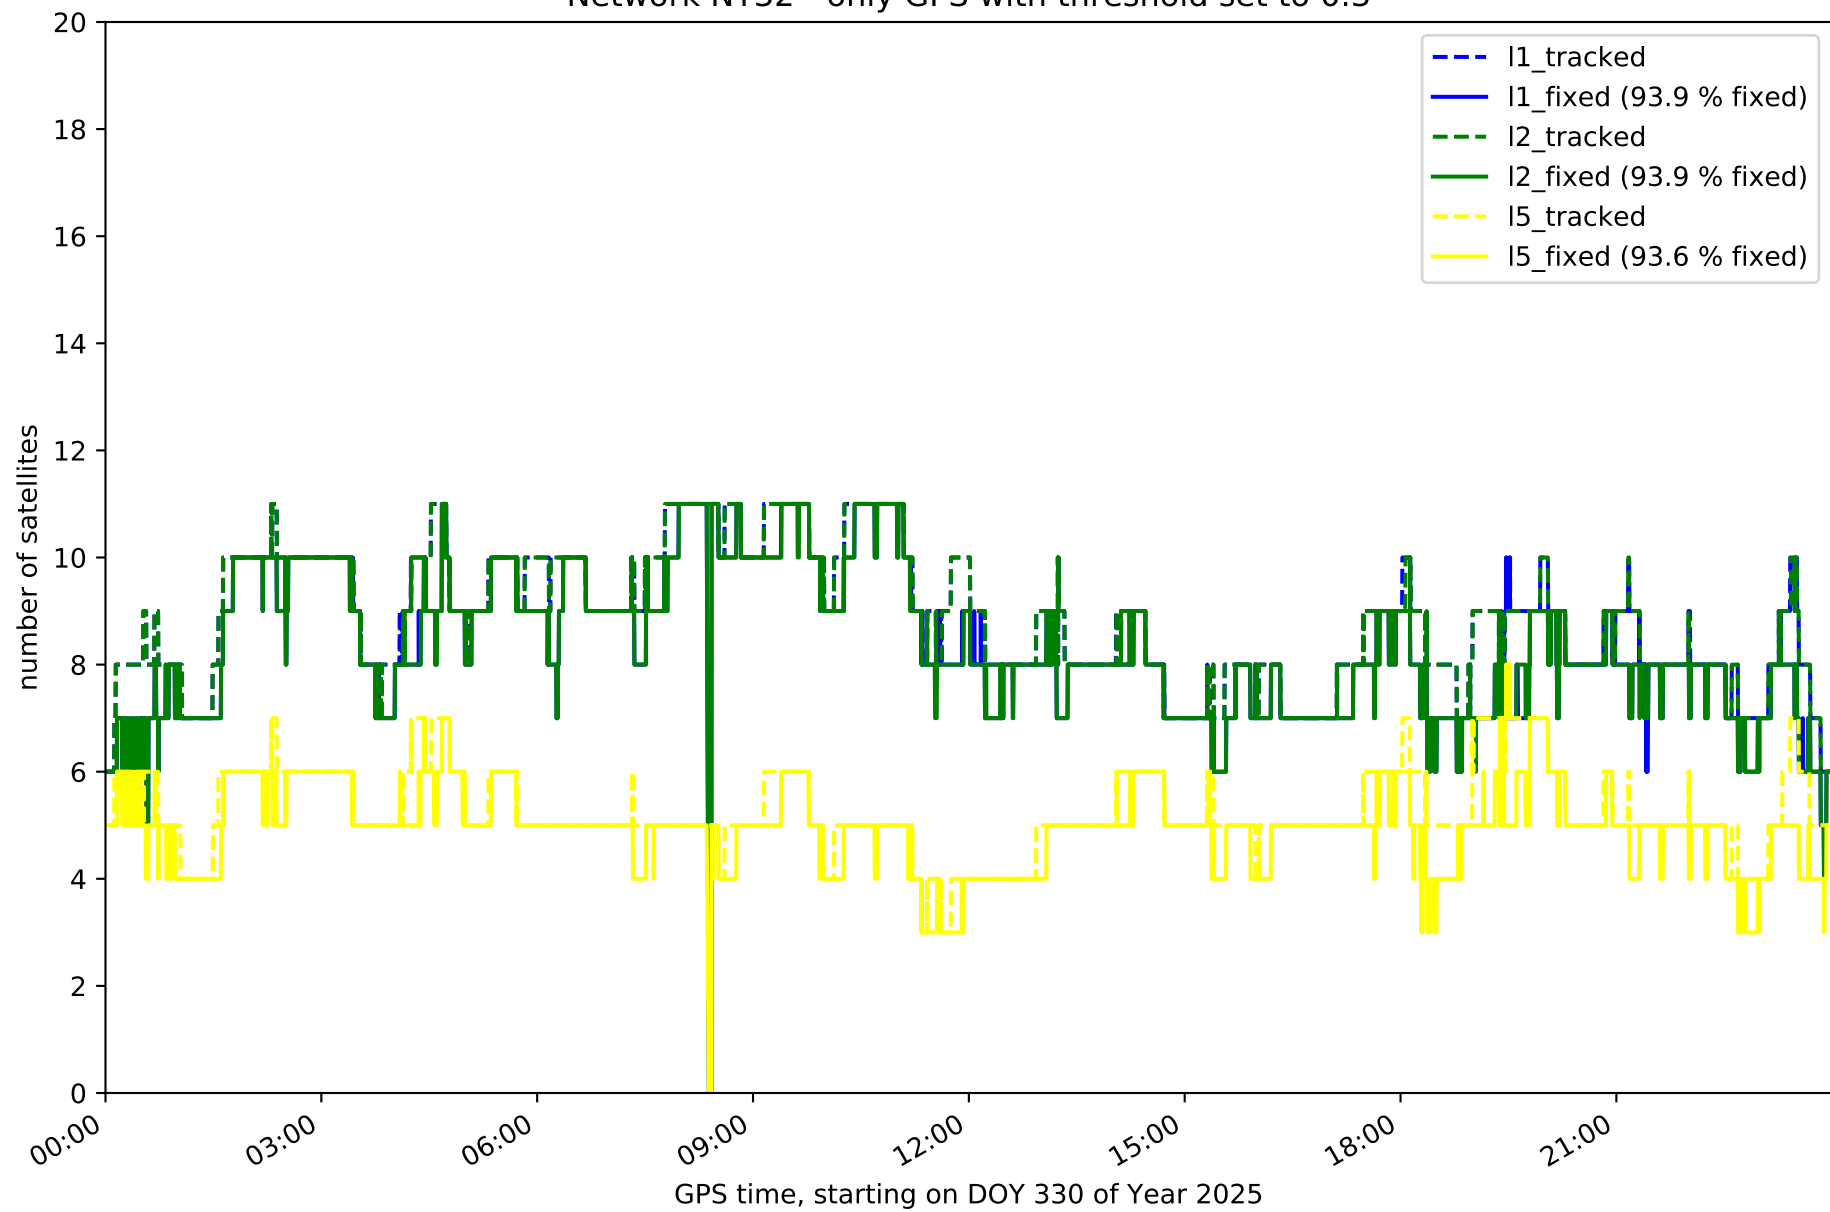


Network NT32 - only GLONASS with threshold set to 0.3

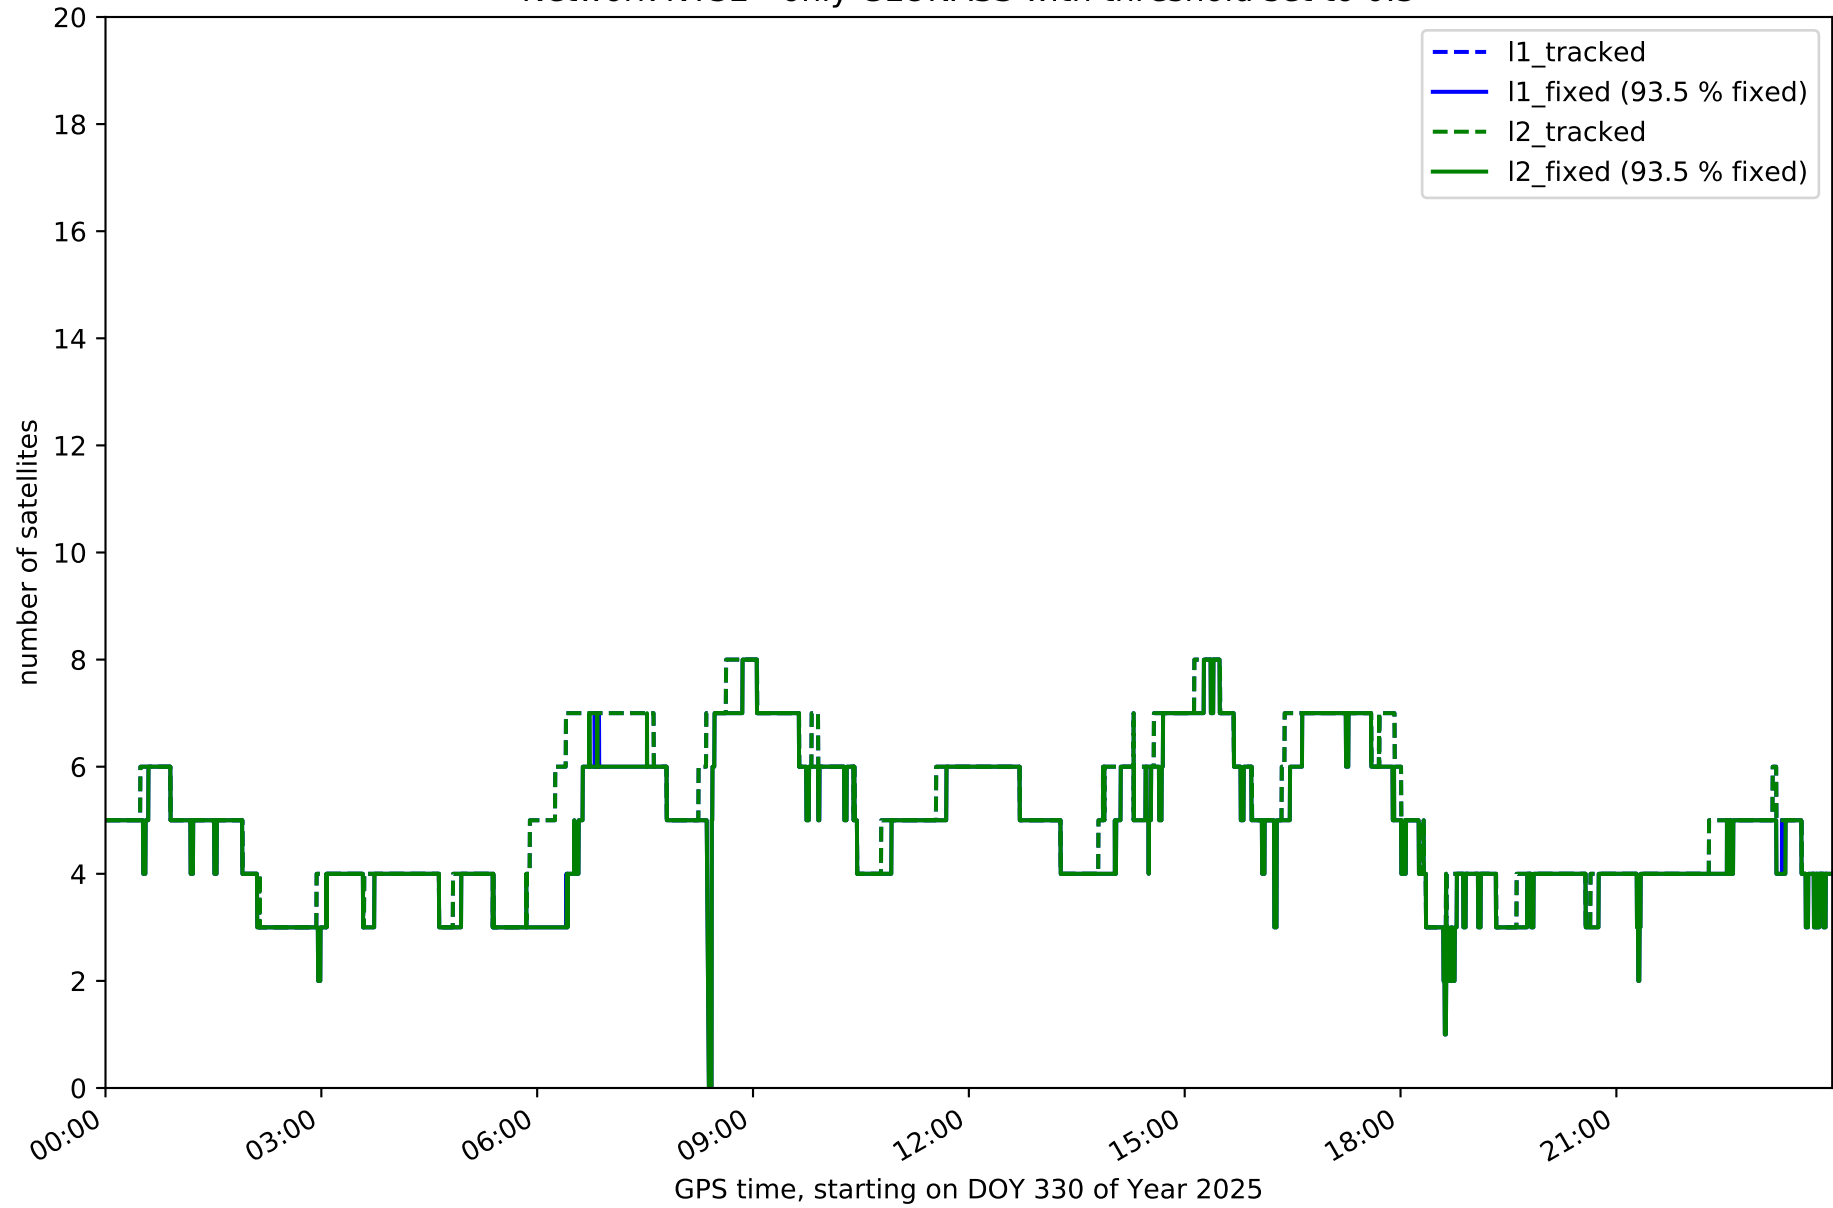


Network NT32 - only BDS with threshold set to 0.3

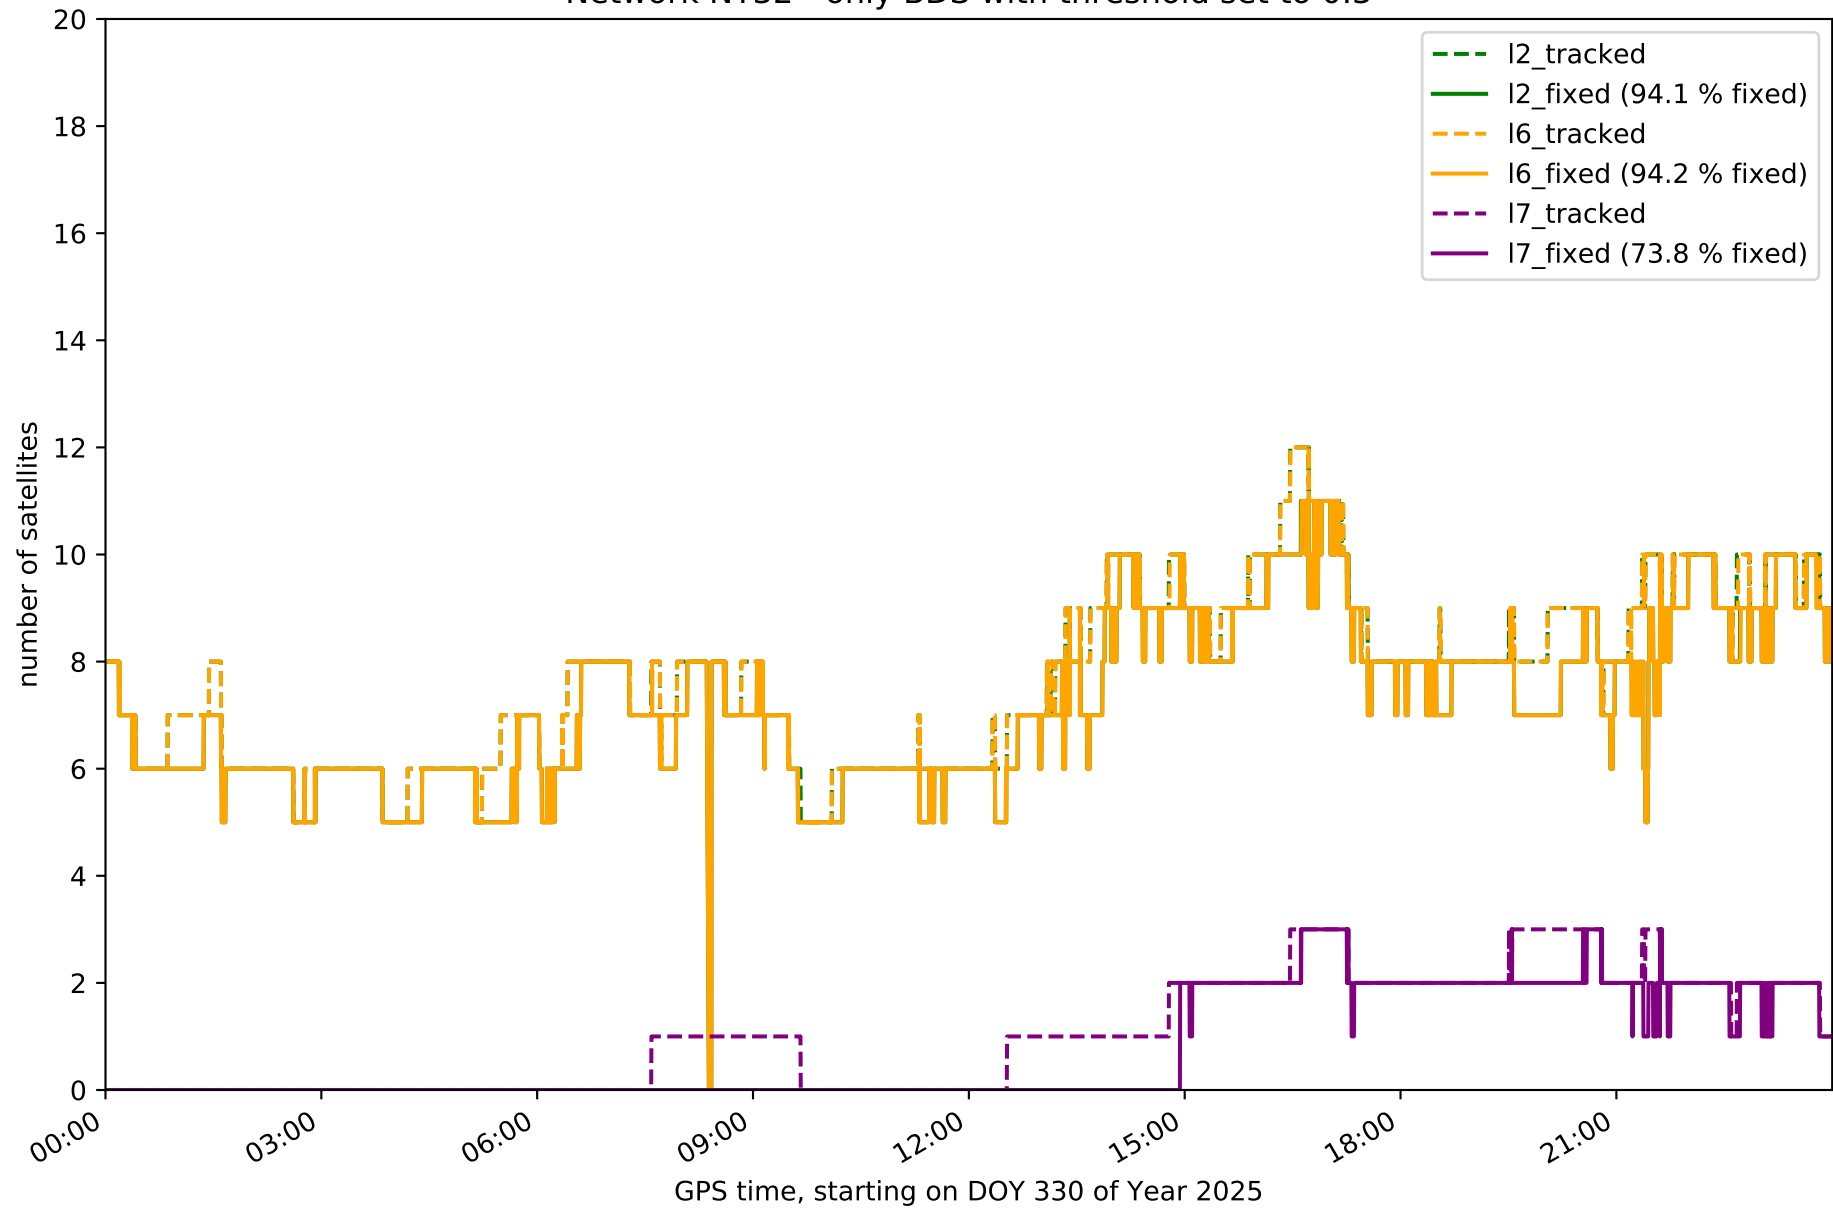


Network NT32 - only Galileo with threshold set to 0.3

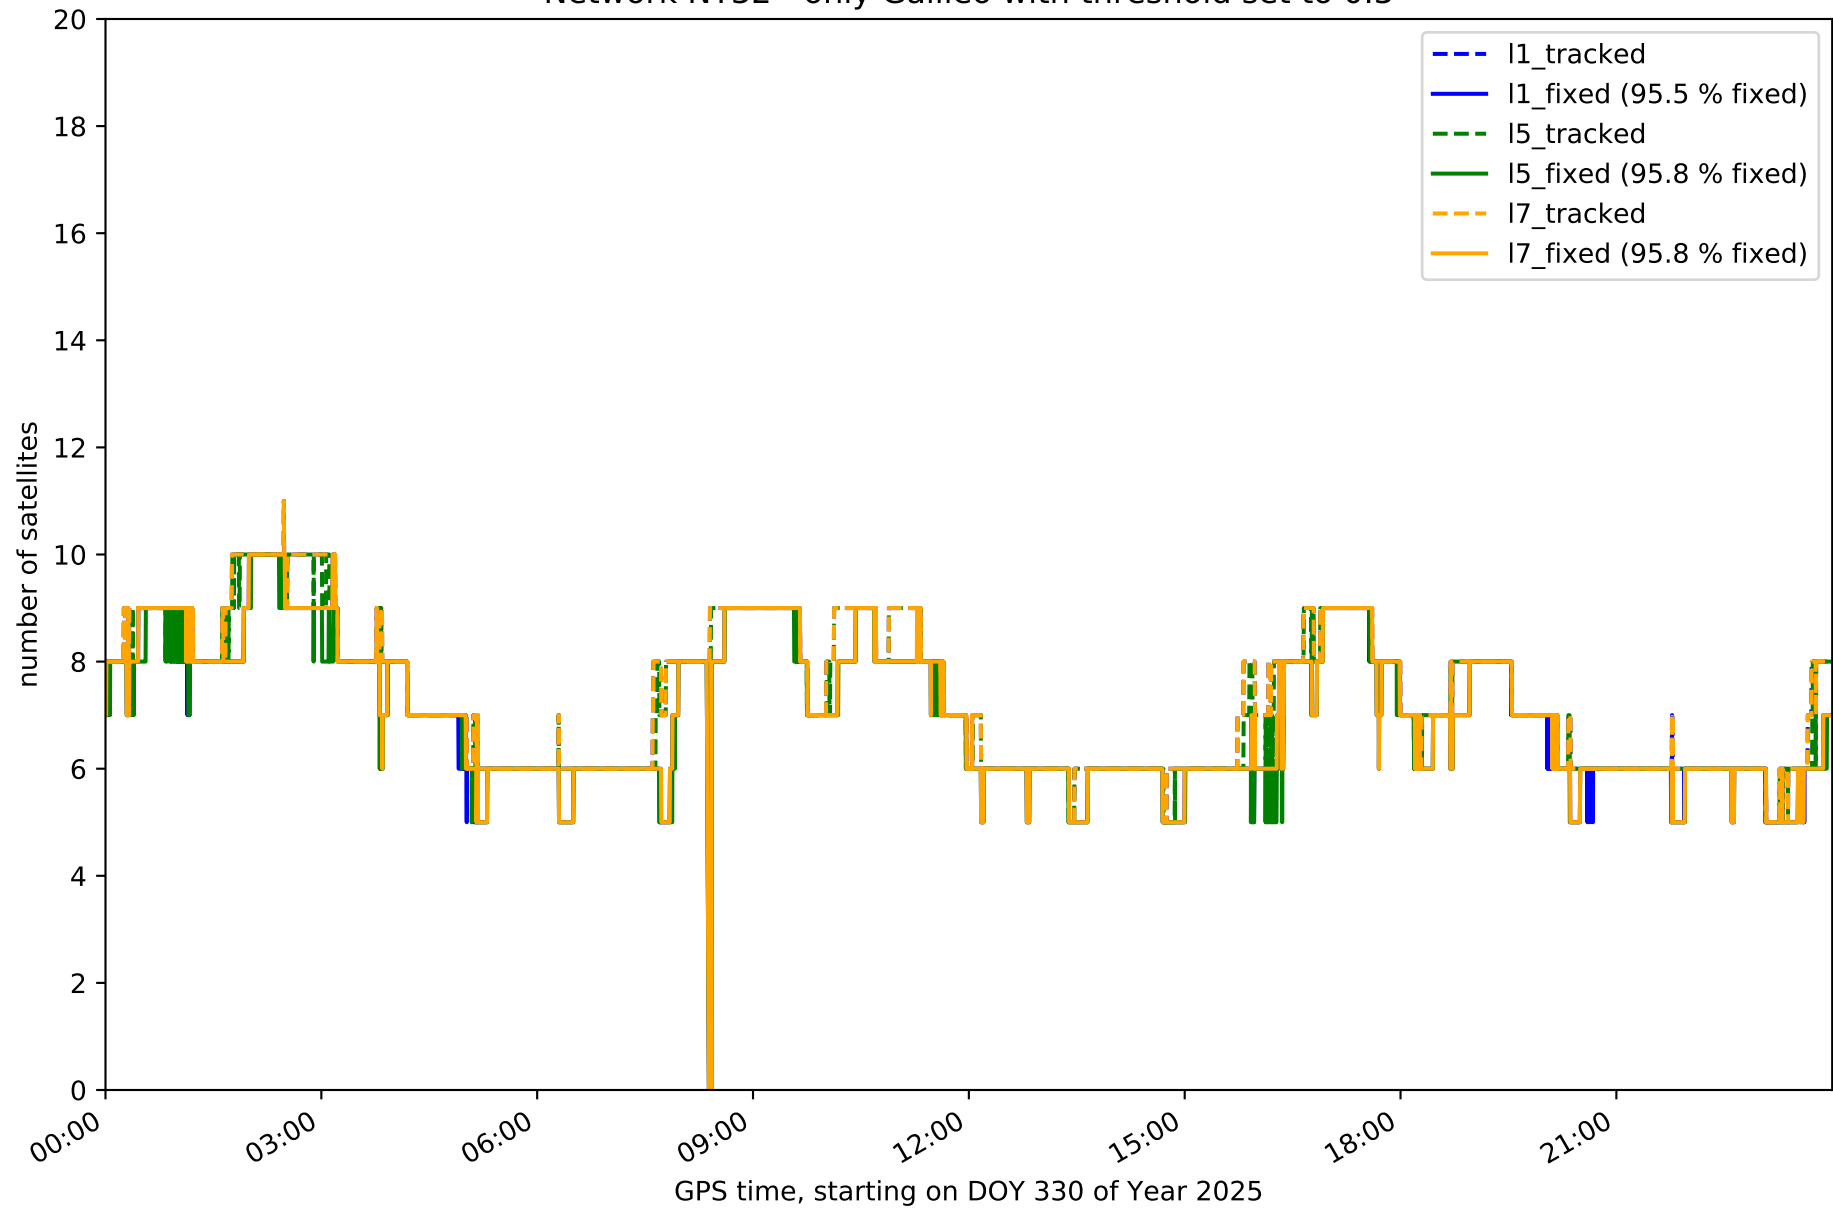


Station EH01 in network NT32

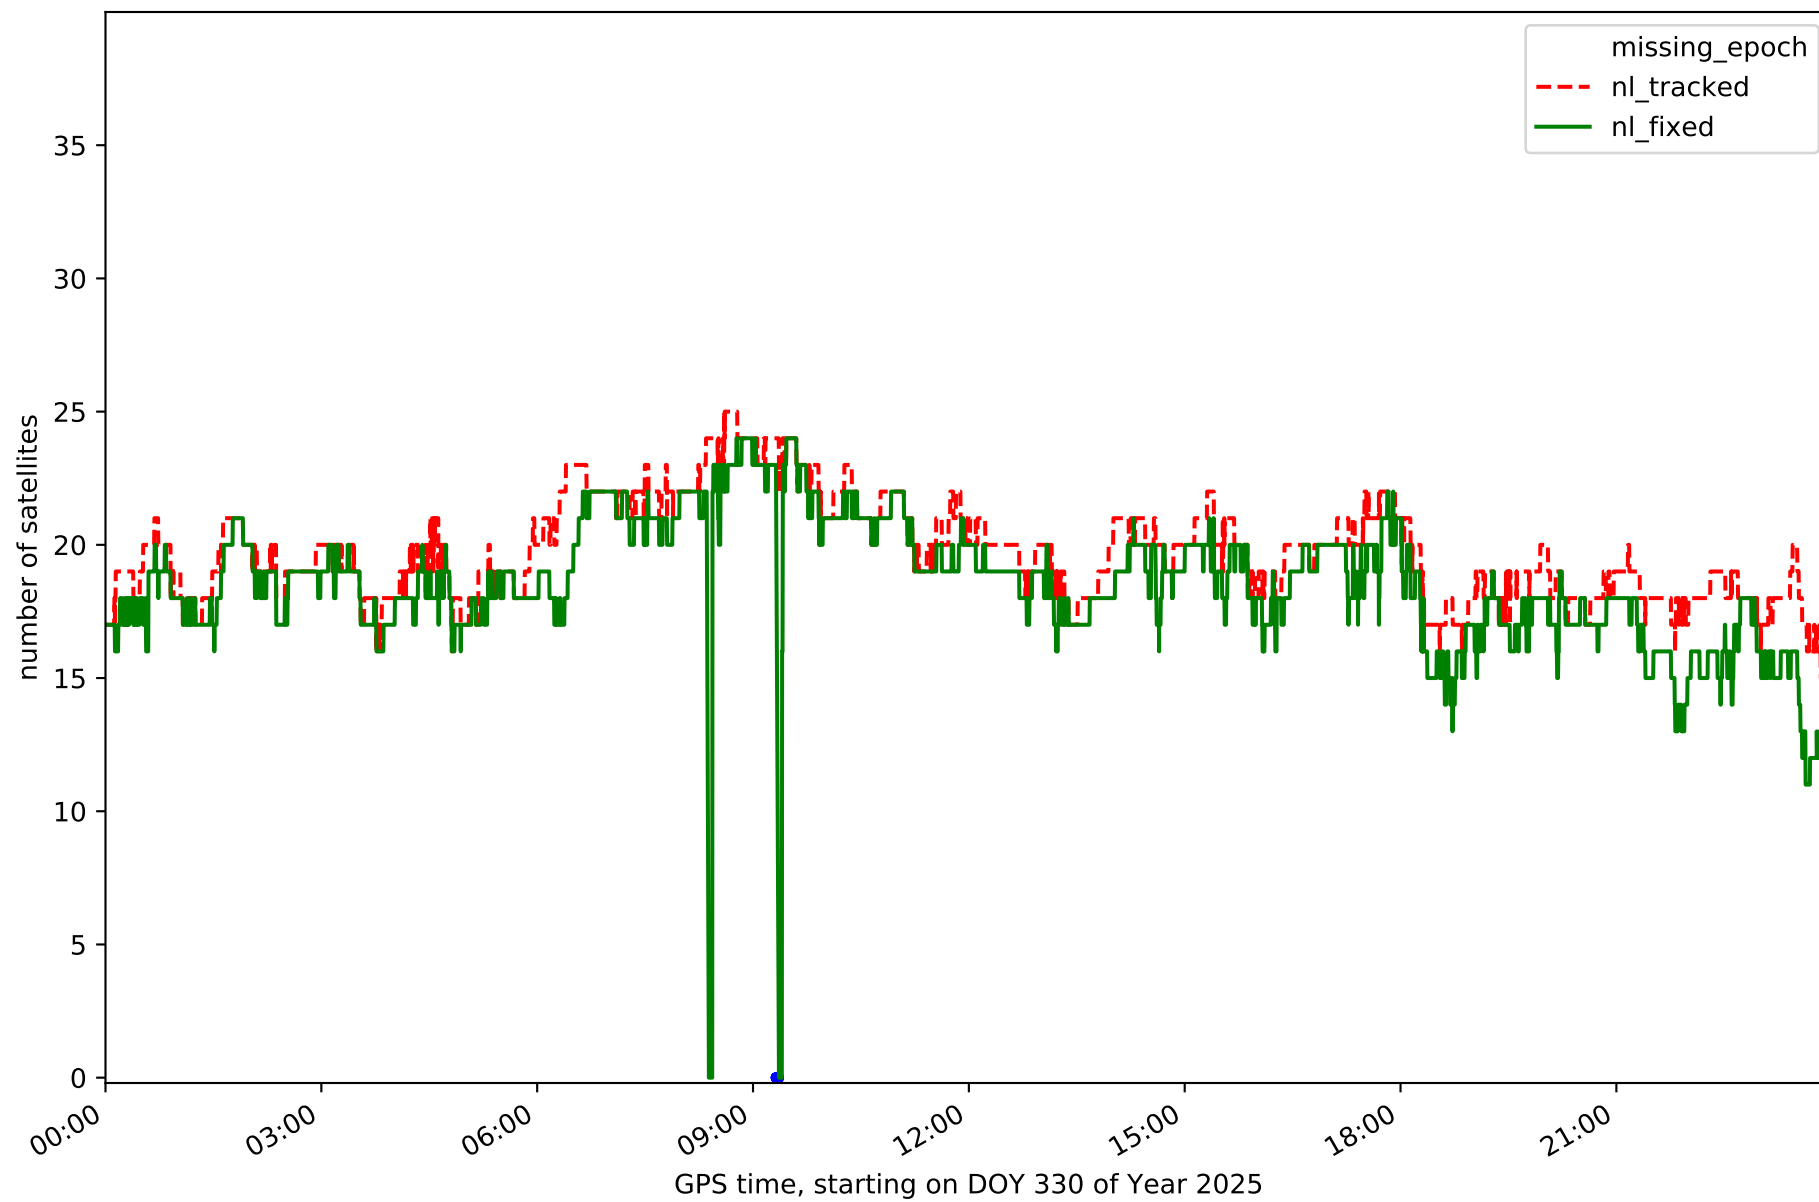


Station EH02 in network NT32

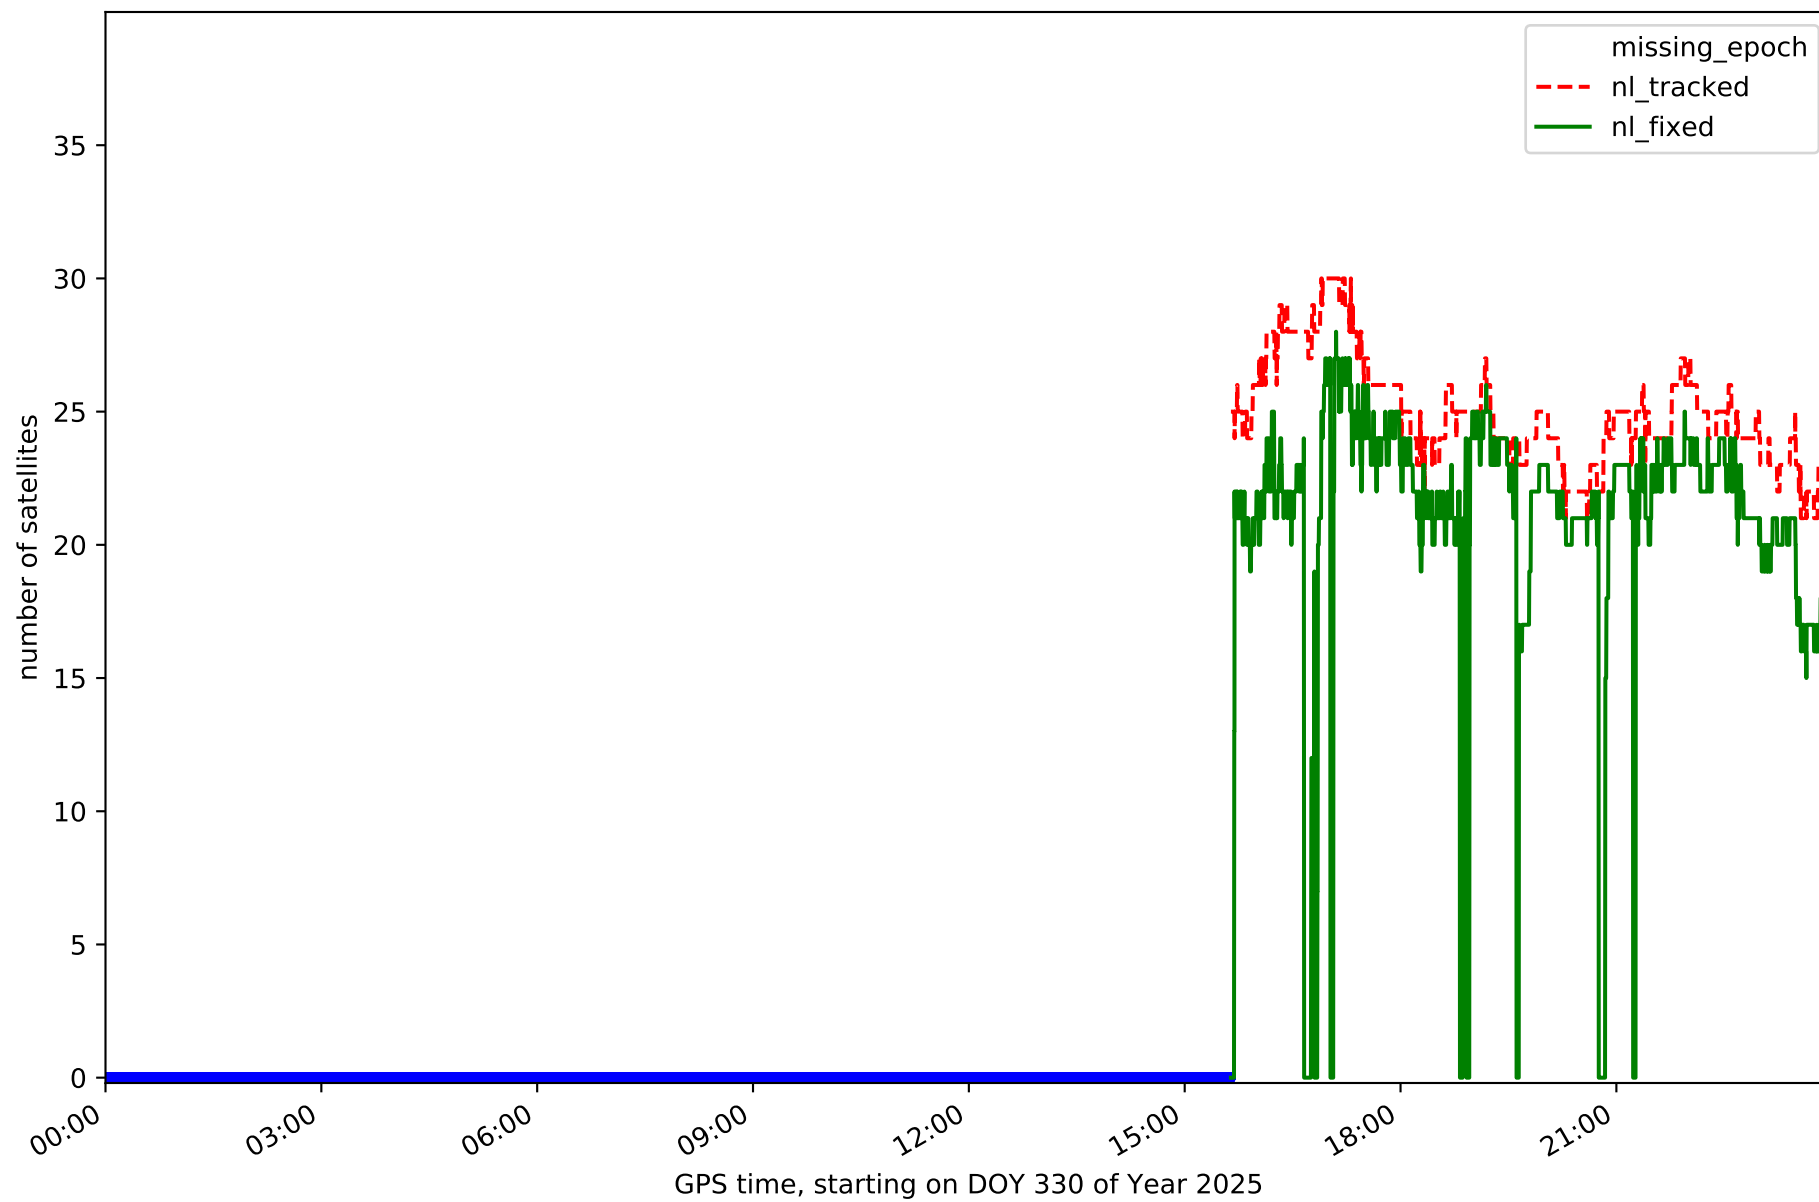


Station GOM1 in network NT32

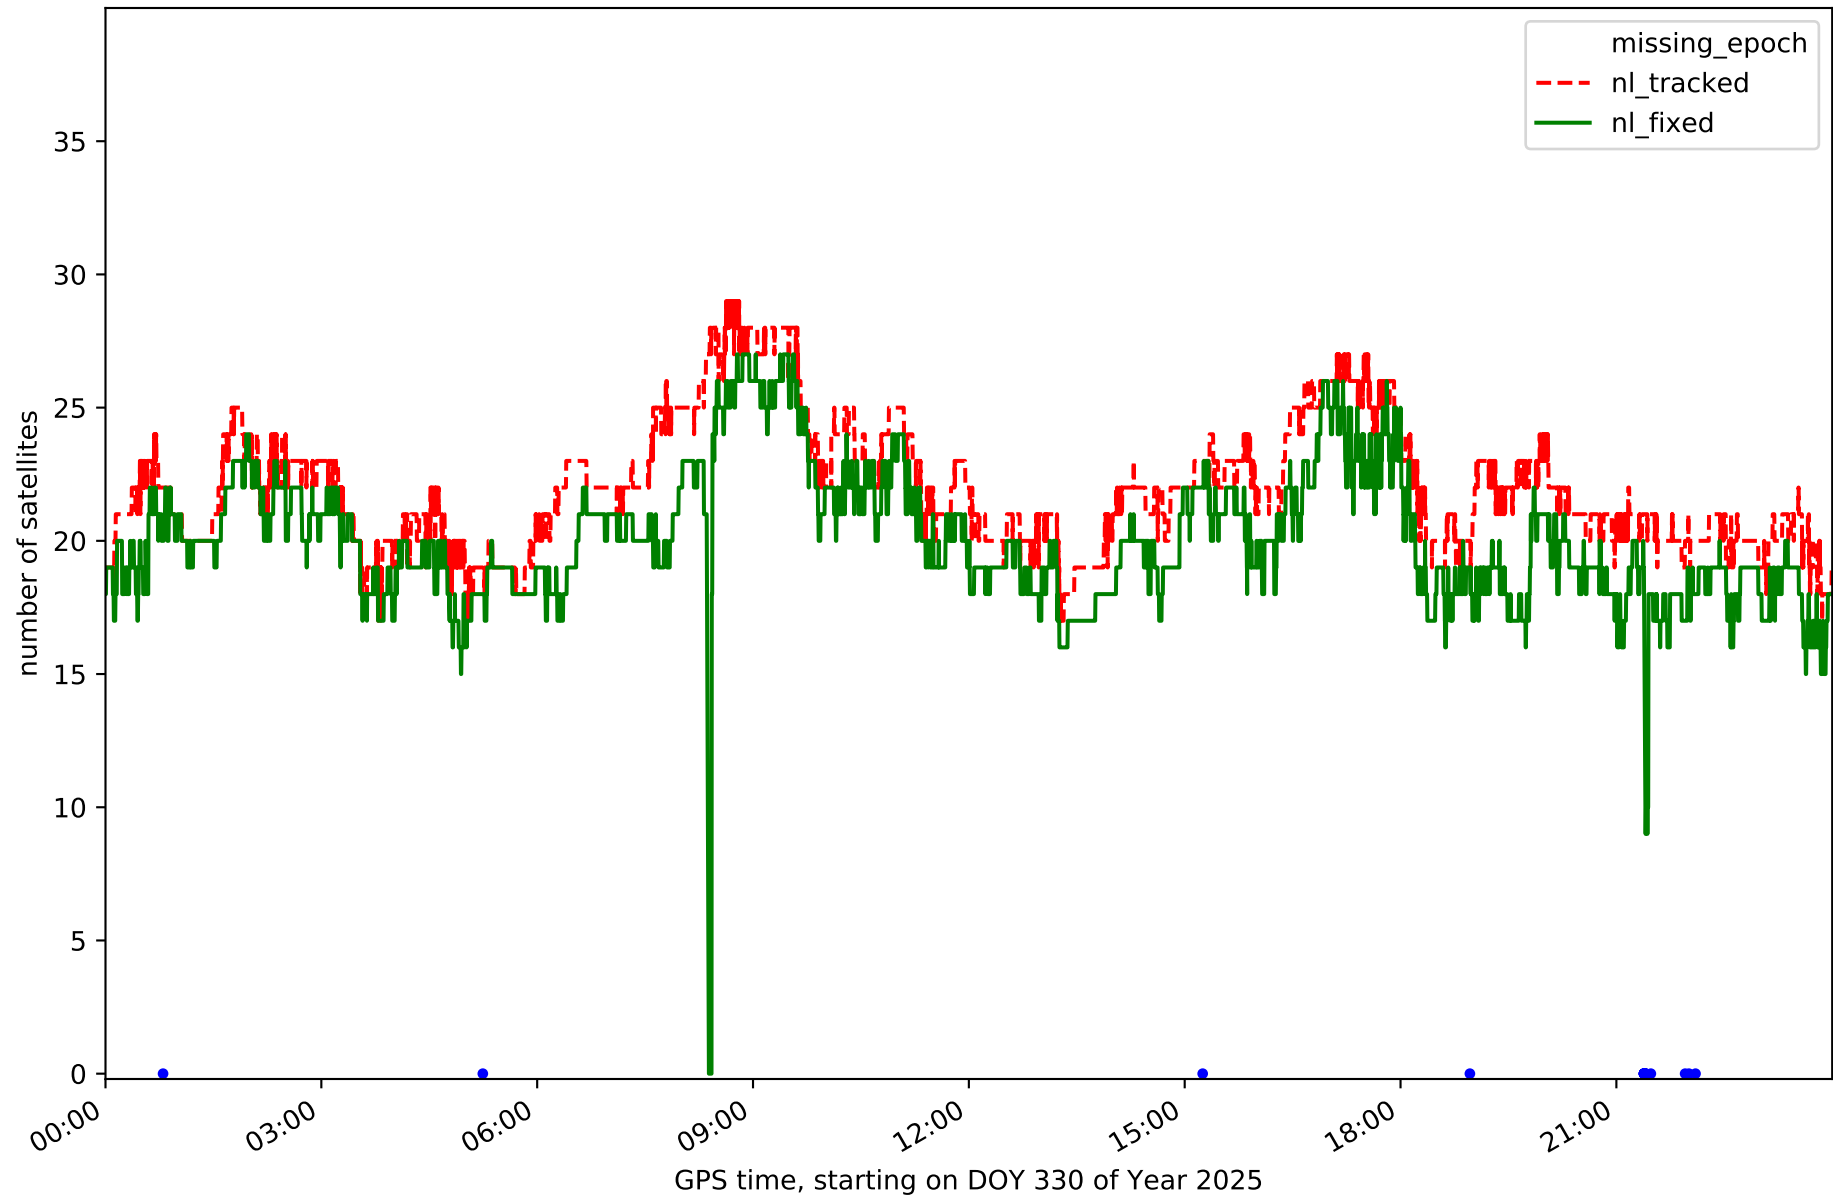


Station GOME in network NT32

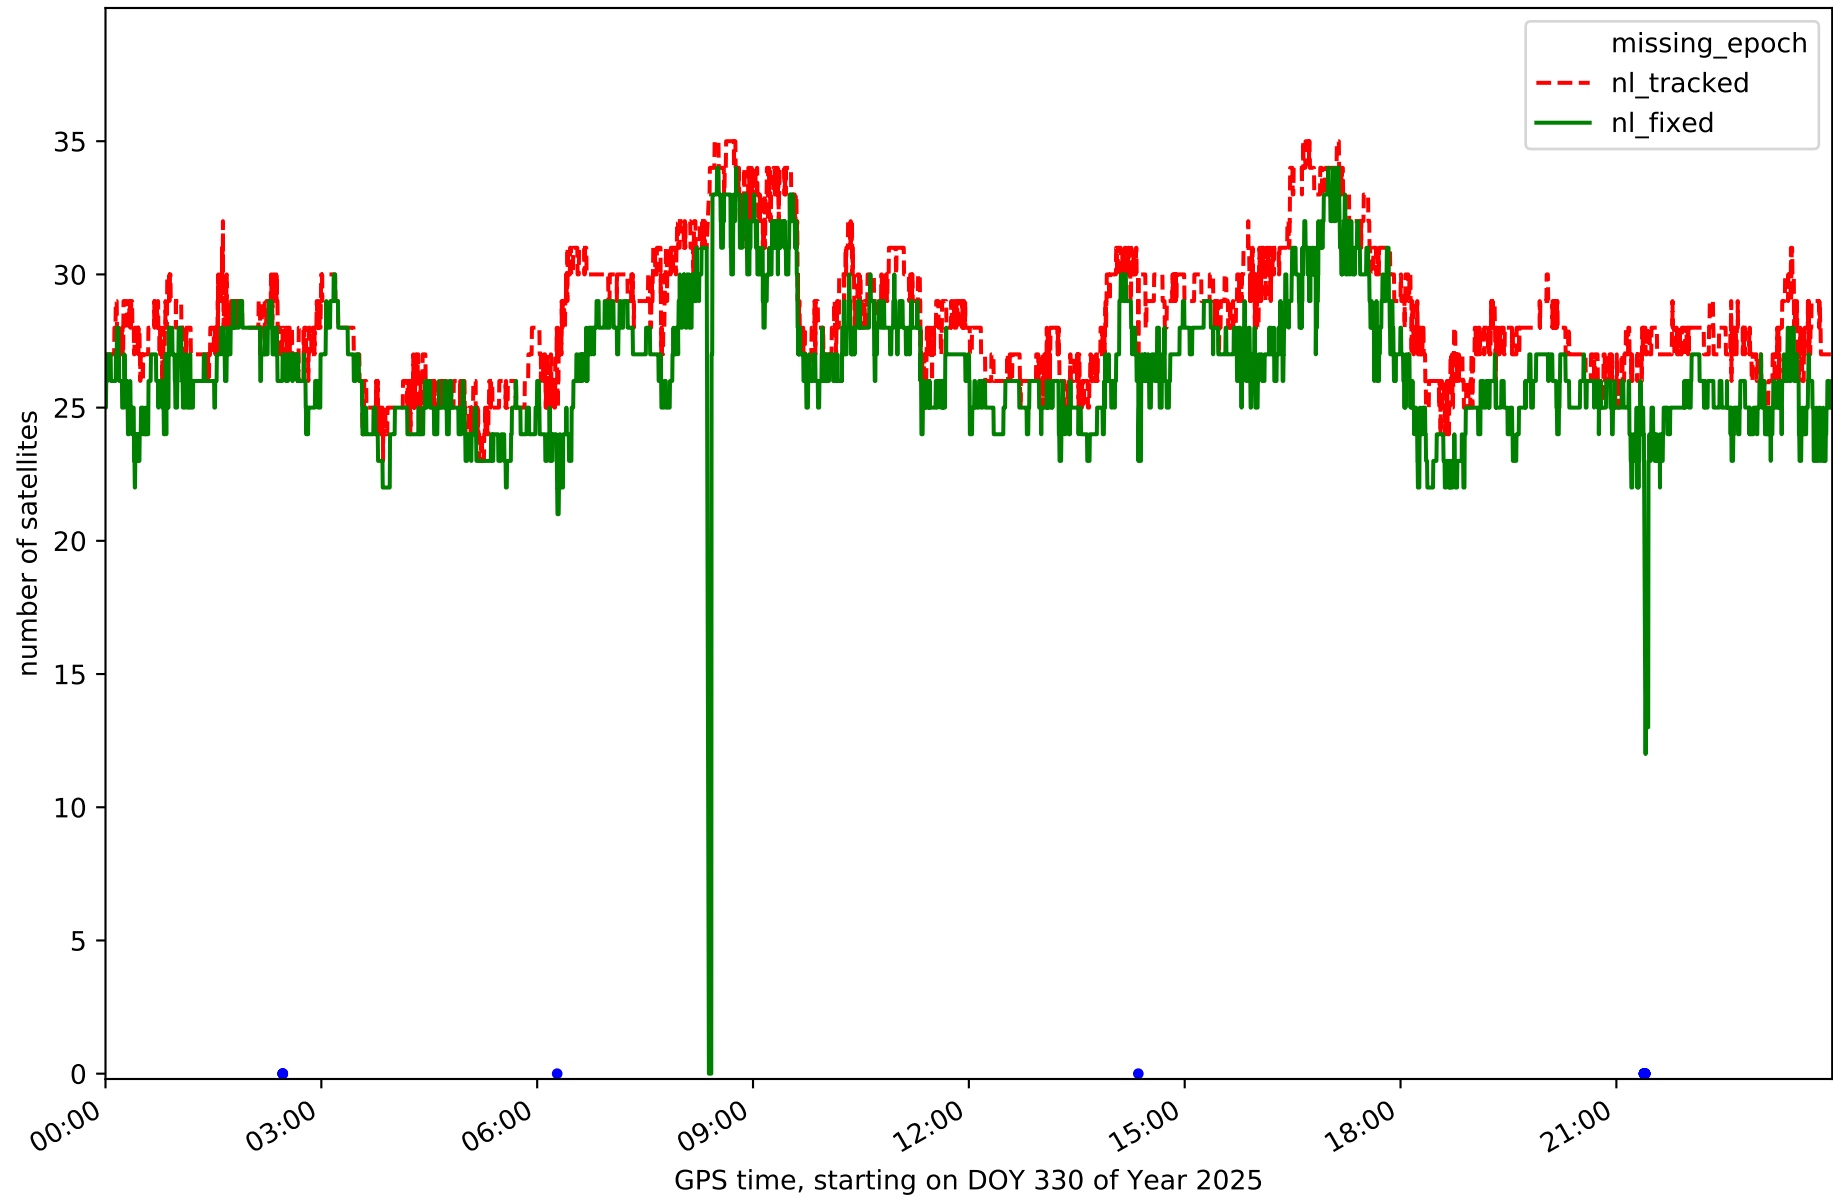


Station IZAN in network NT32

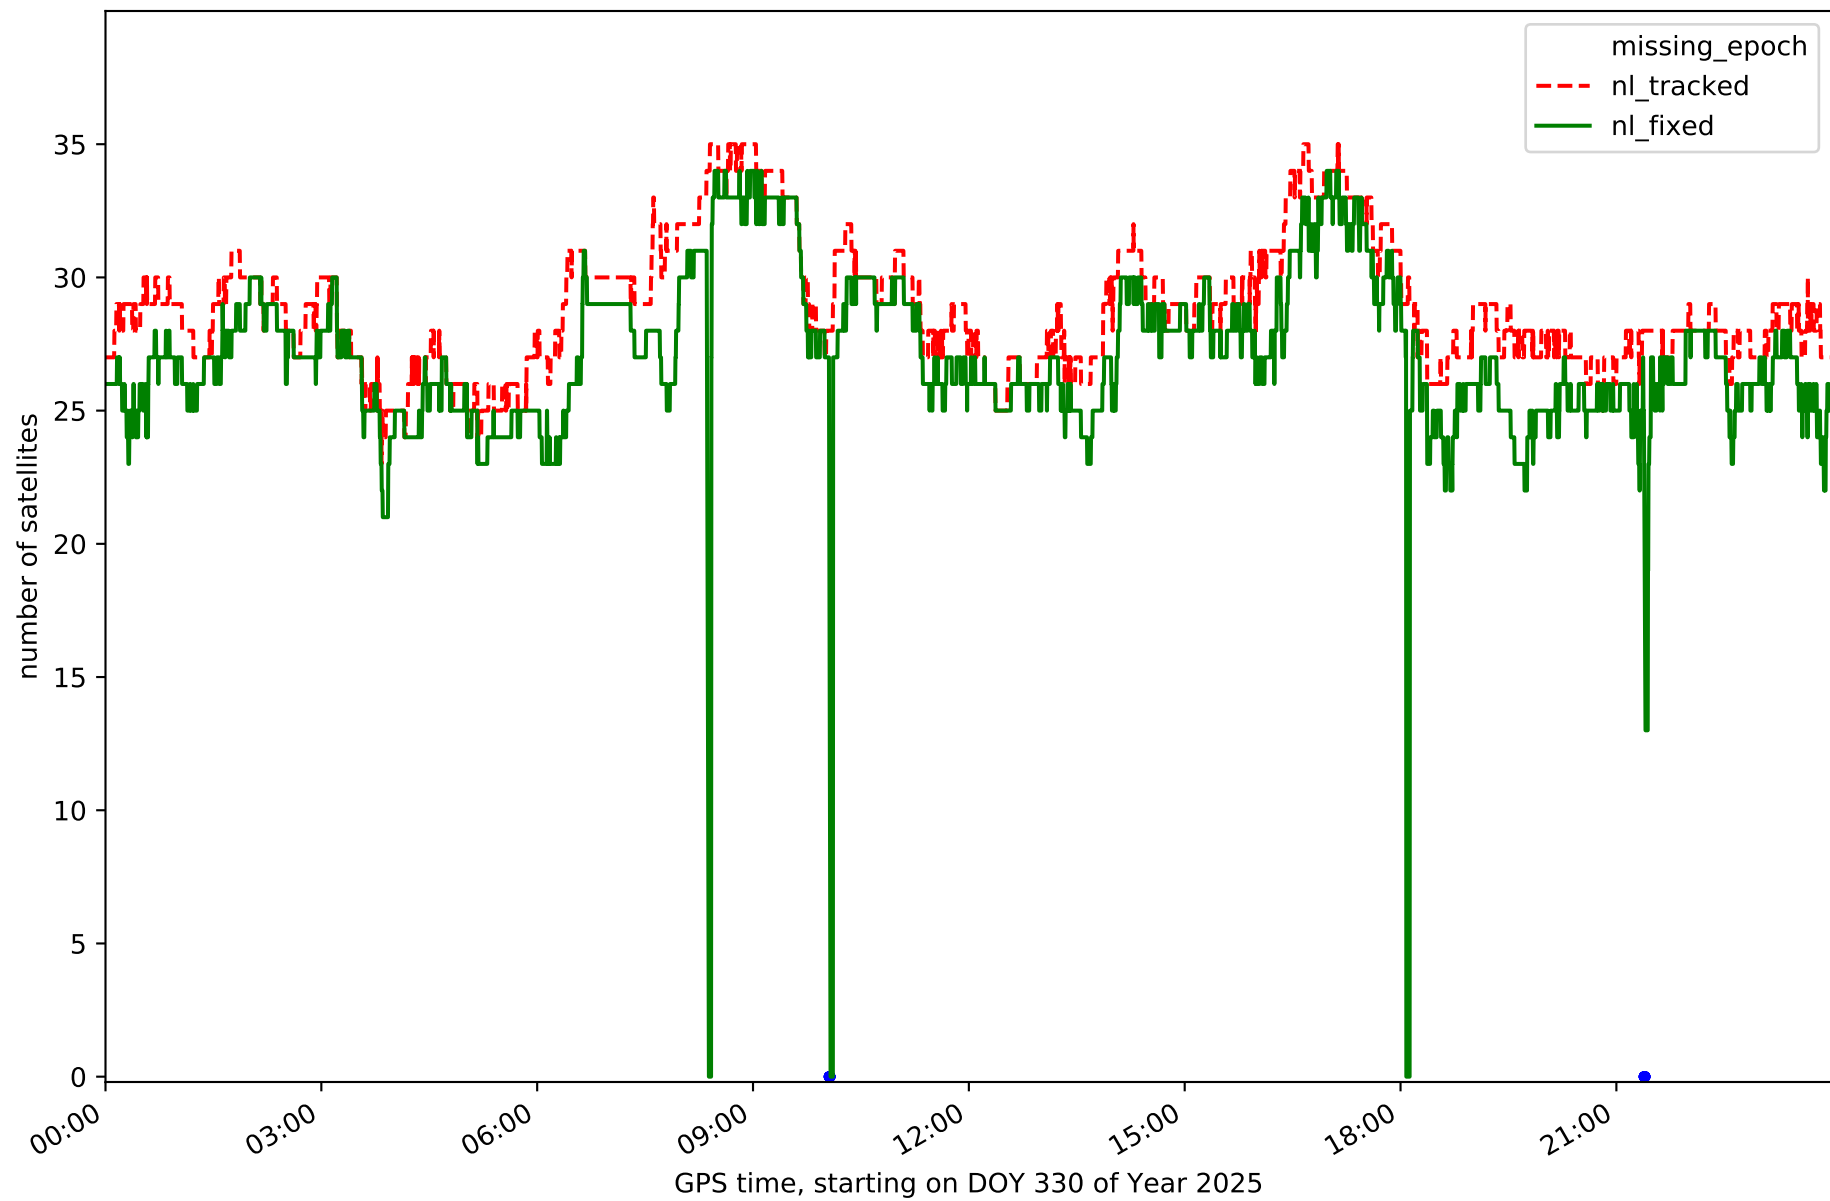


Station LP01 in network NT32

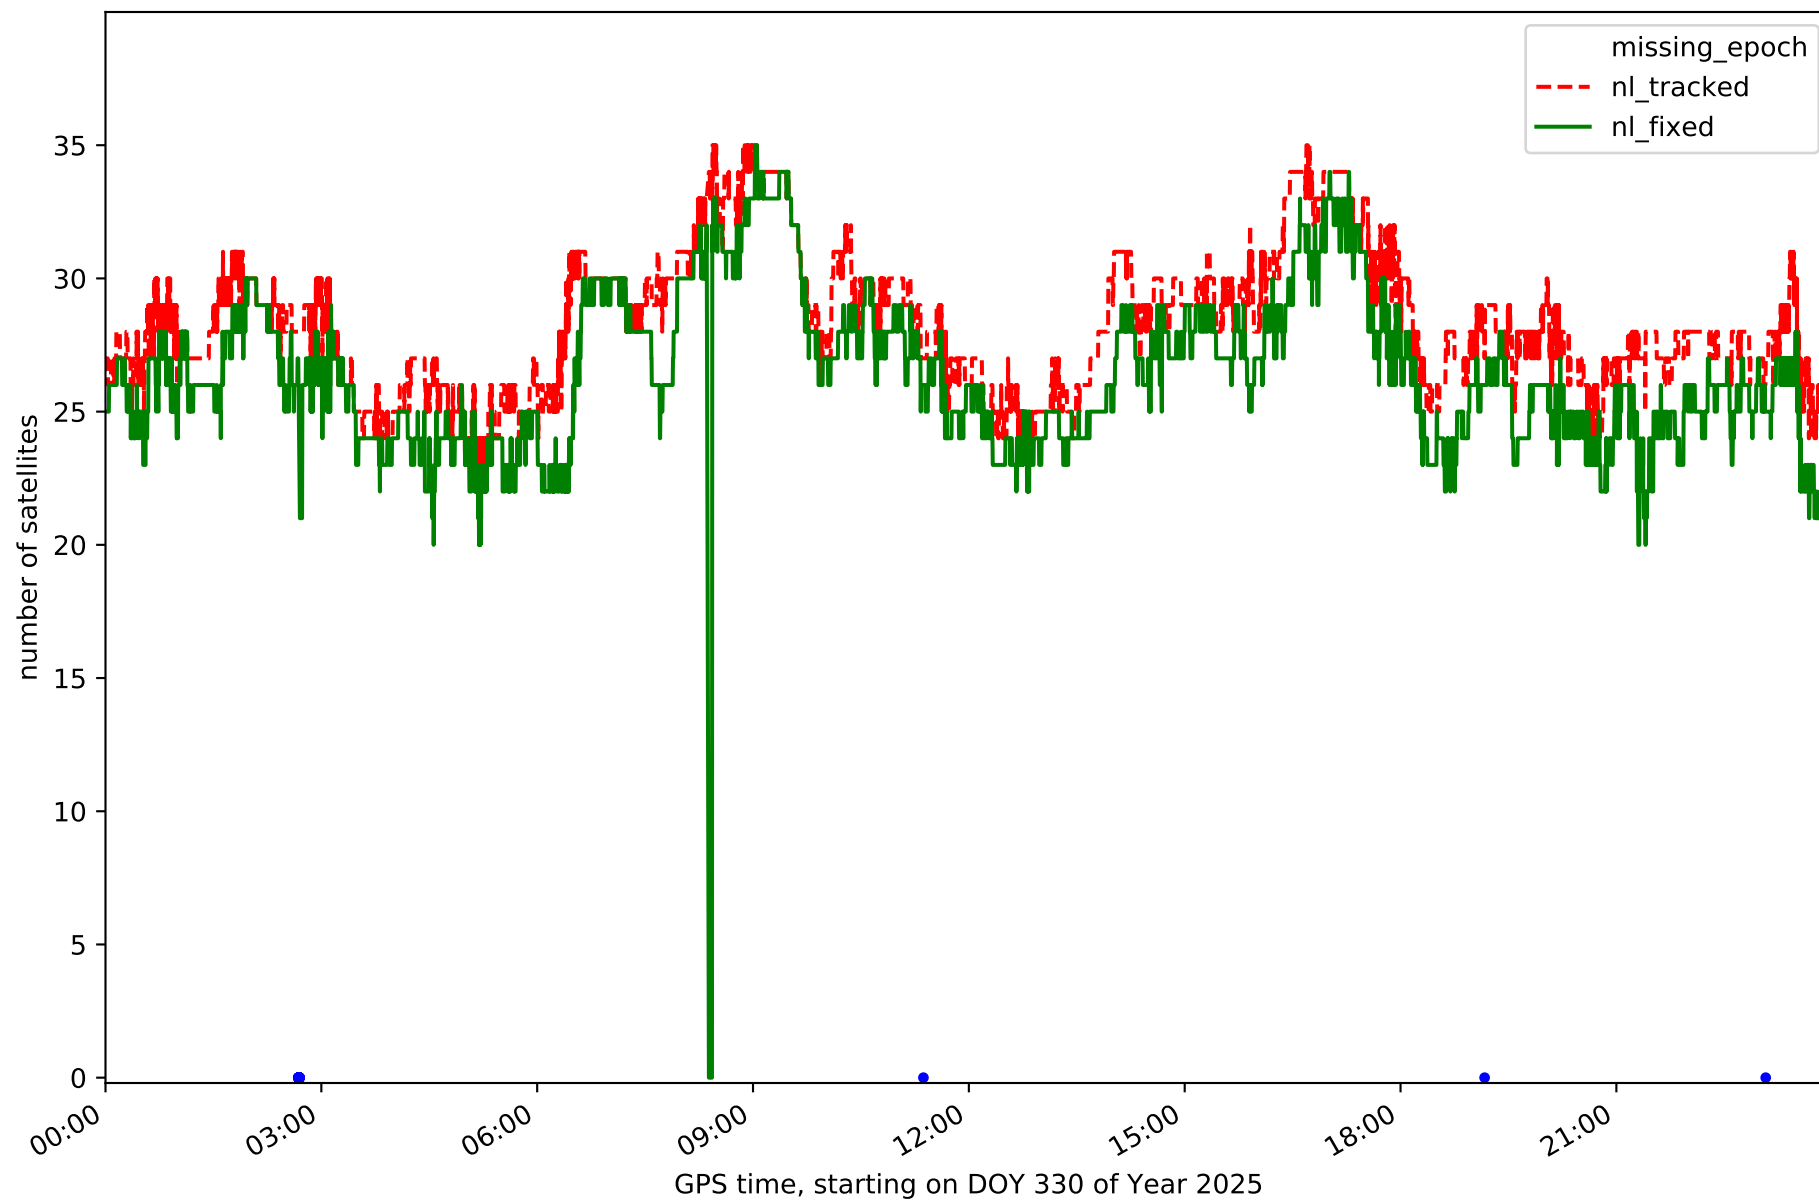


Station LP03 in network NT32

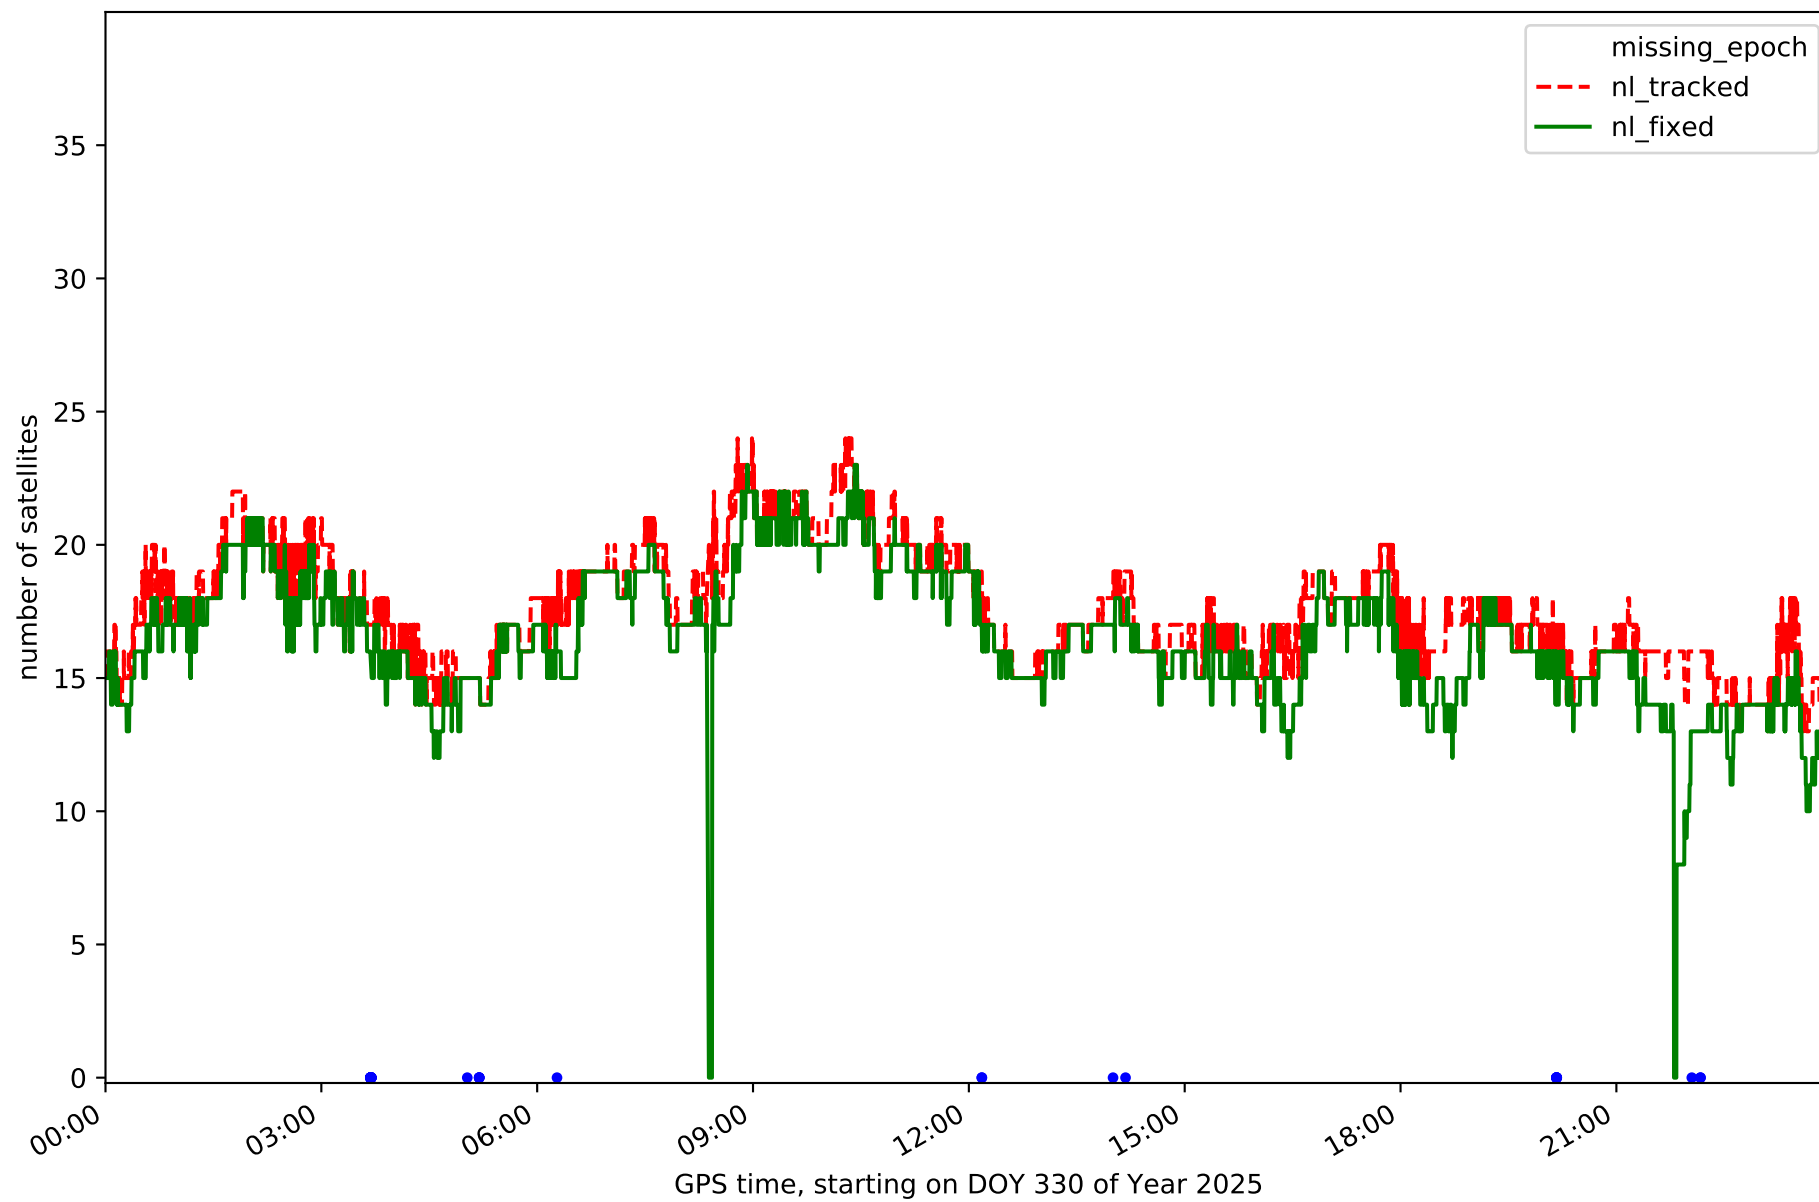


Station LPAL in network NT32

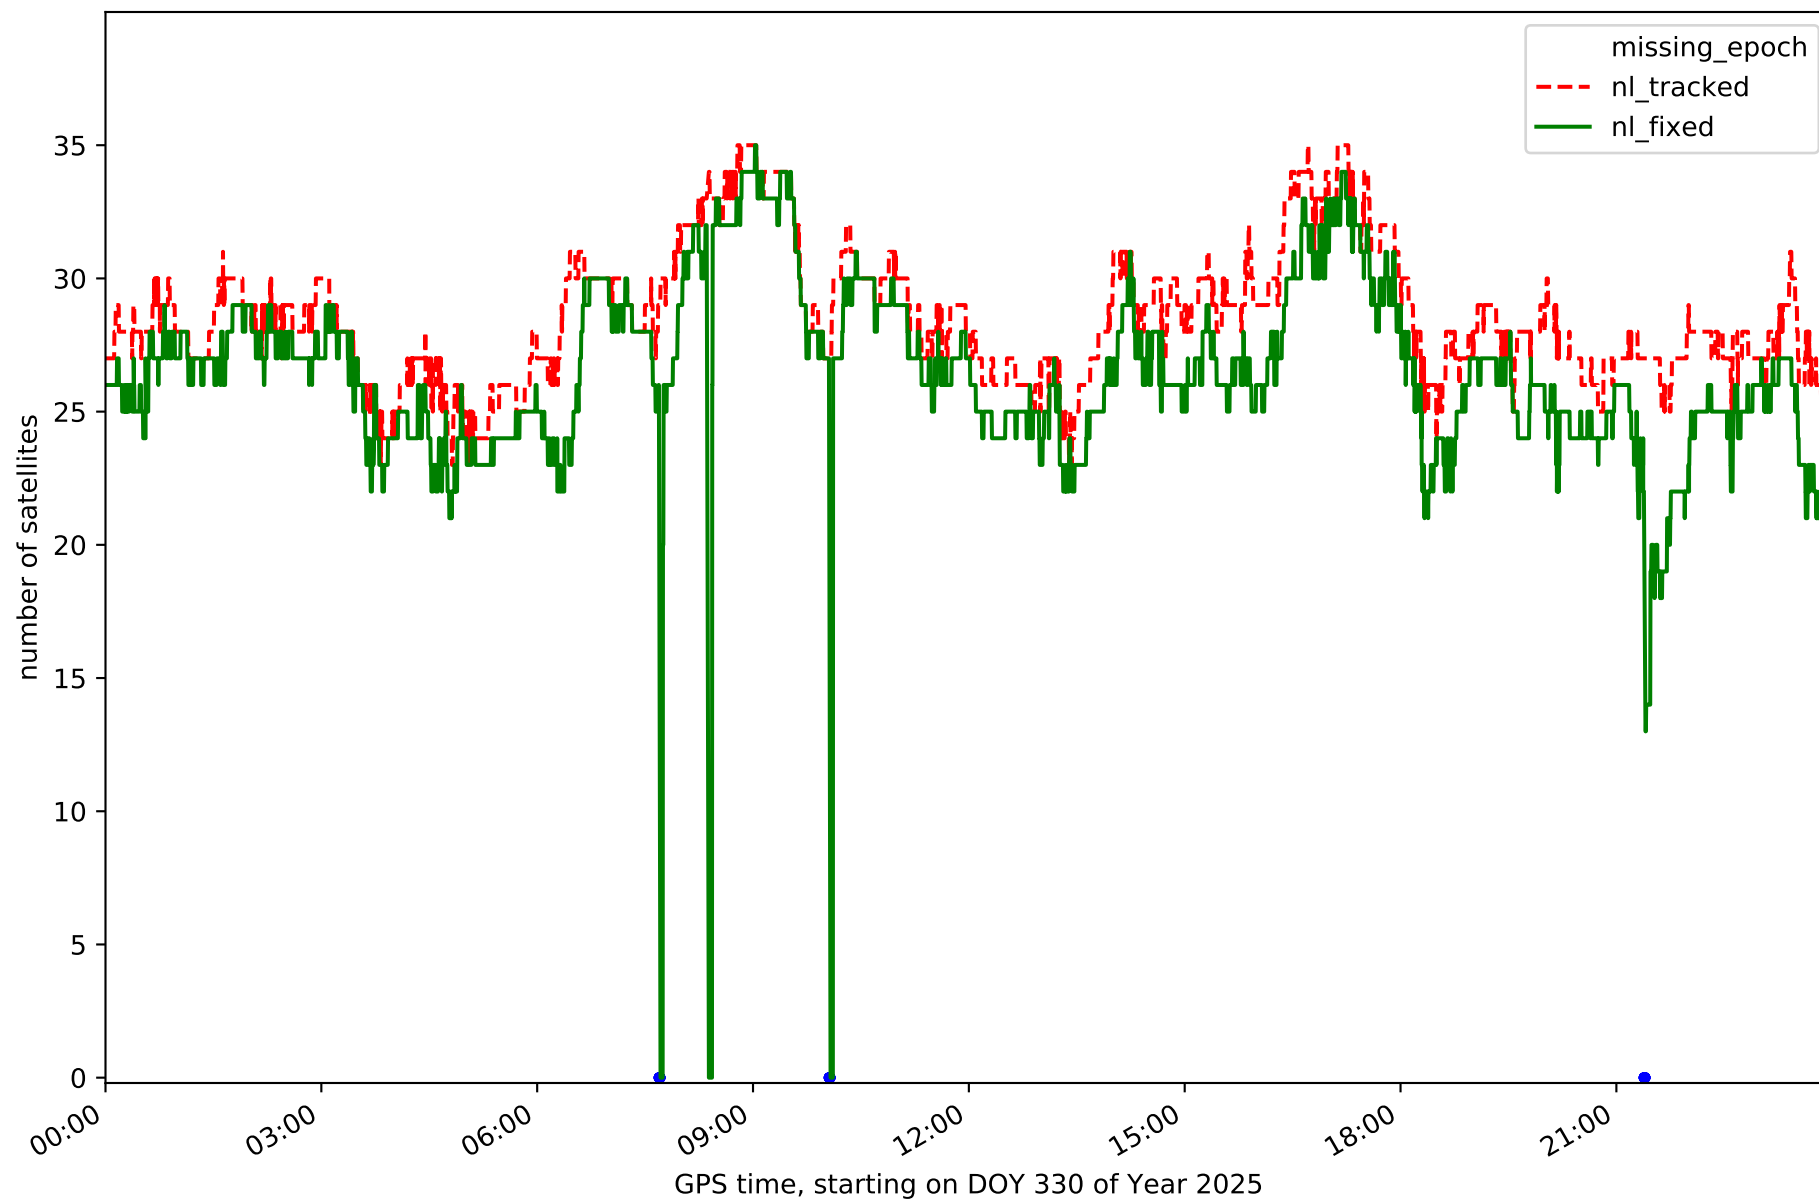


Station LRES in network NT32

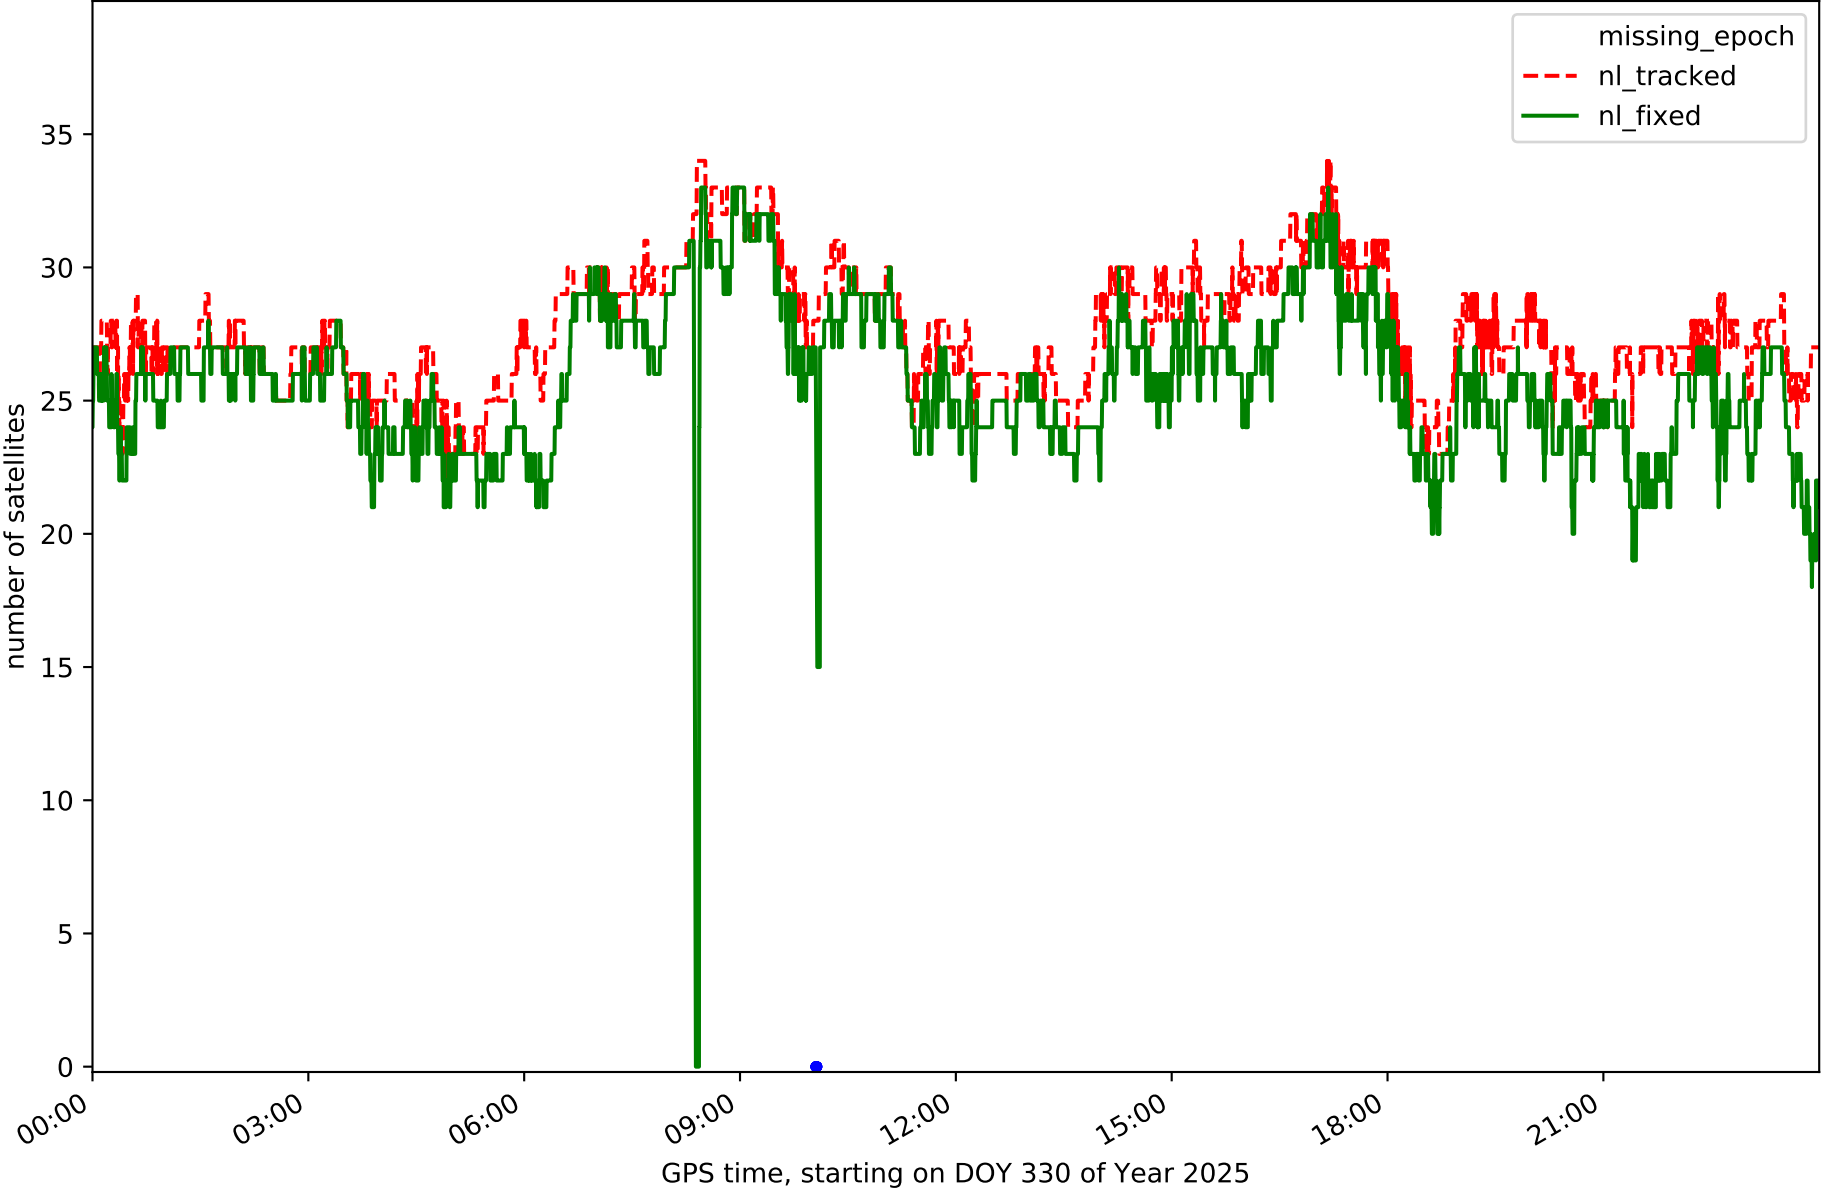


Station TN01 in network NT32

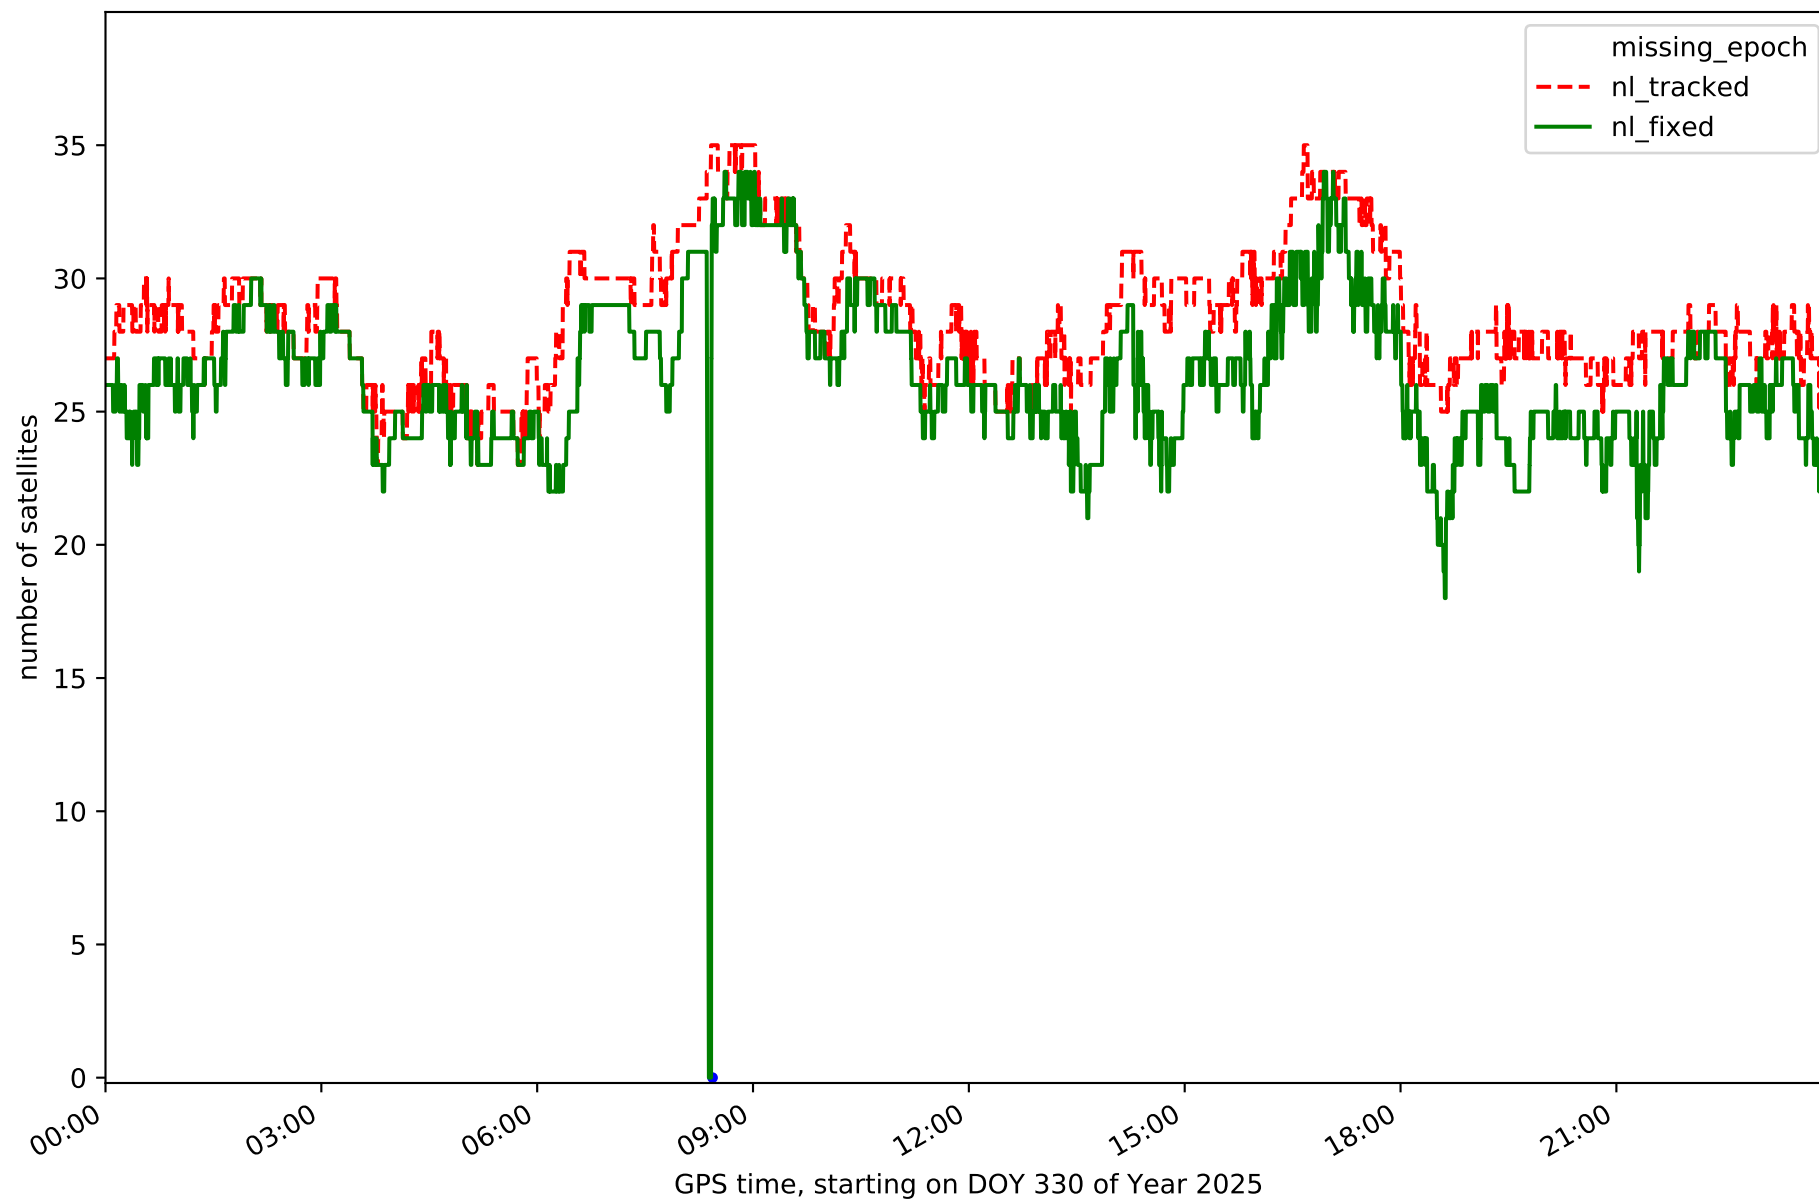


Station TN02 in network NT32

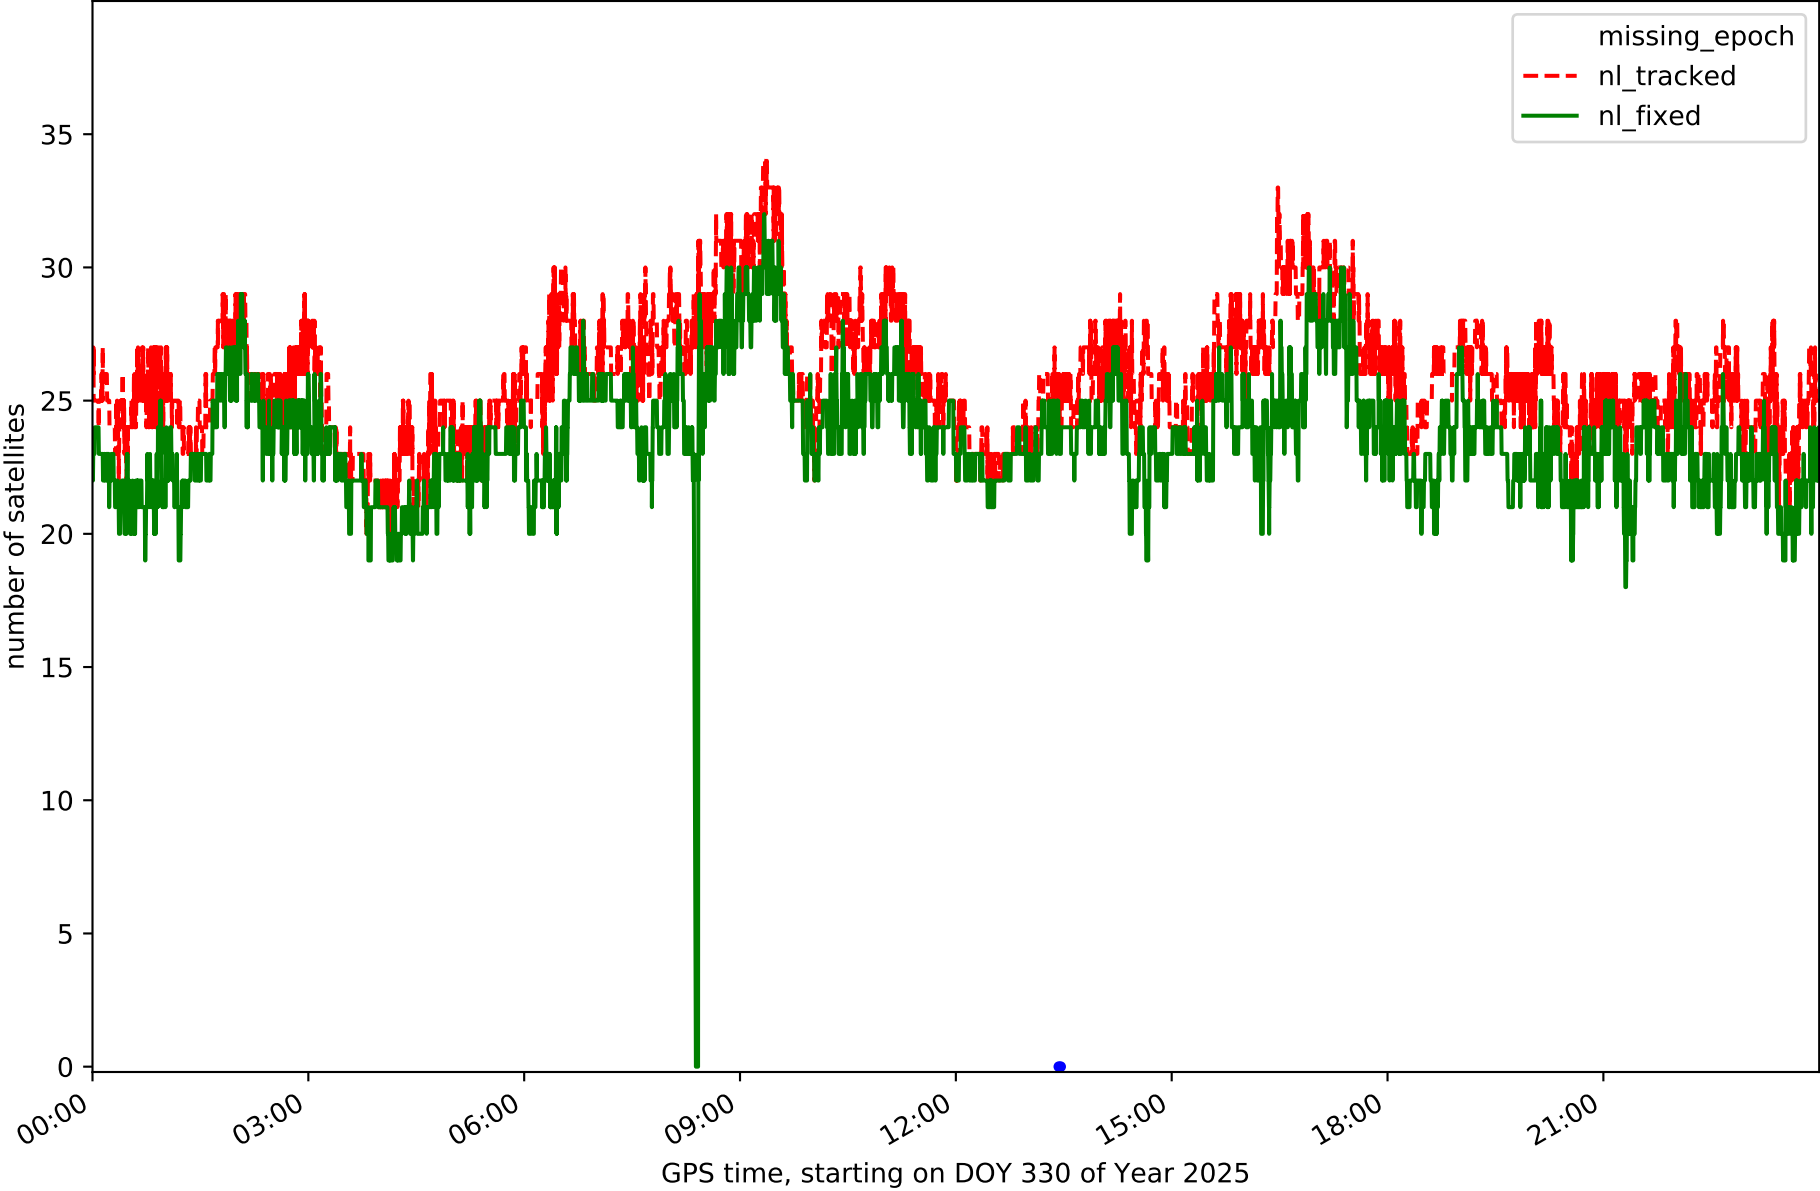


Station TN03 in network NT32

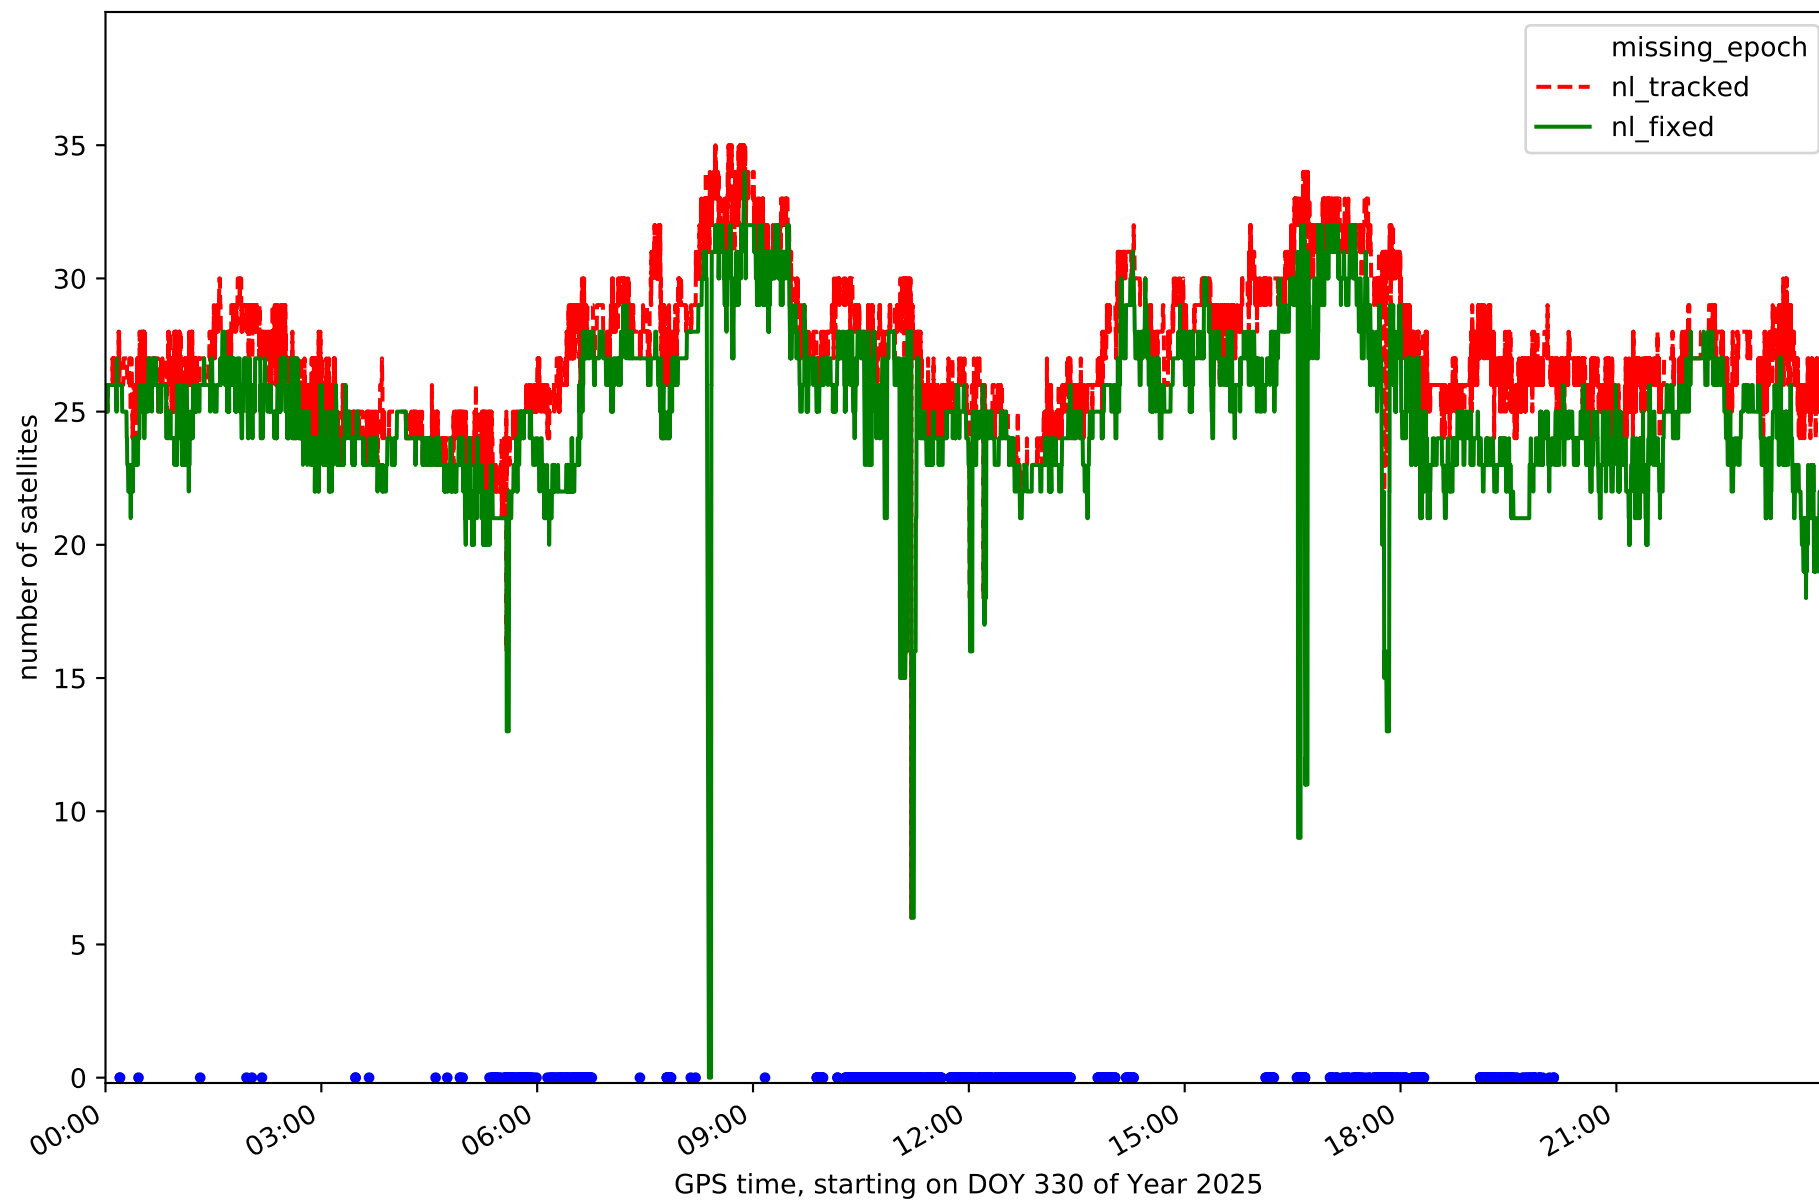


Station TN06 in network NT32

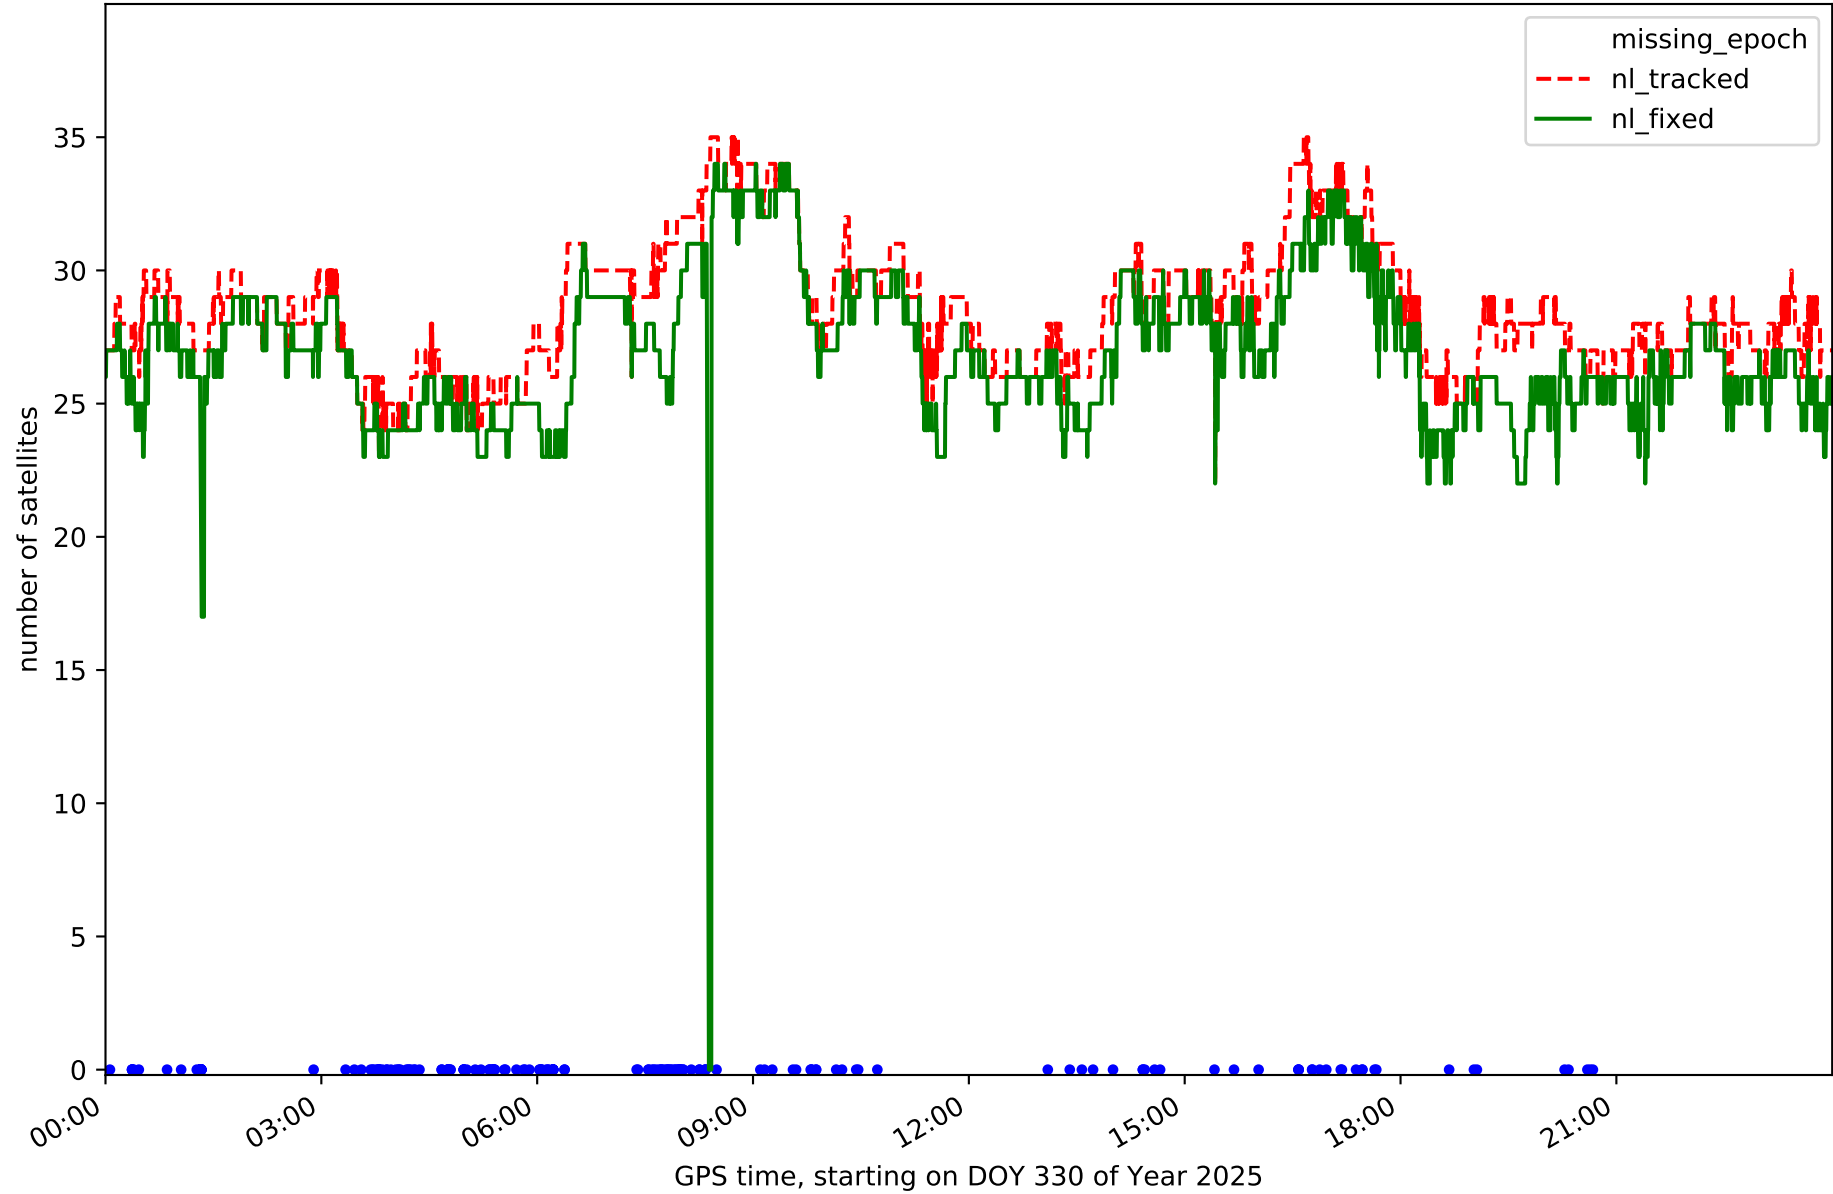


Station TN09 in network NT32

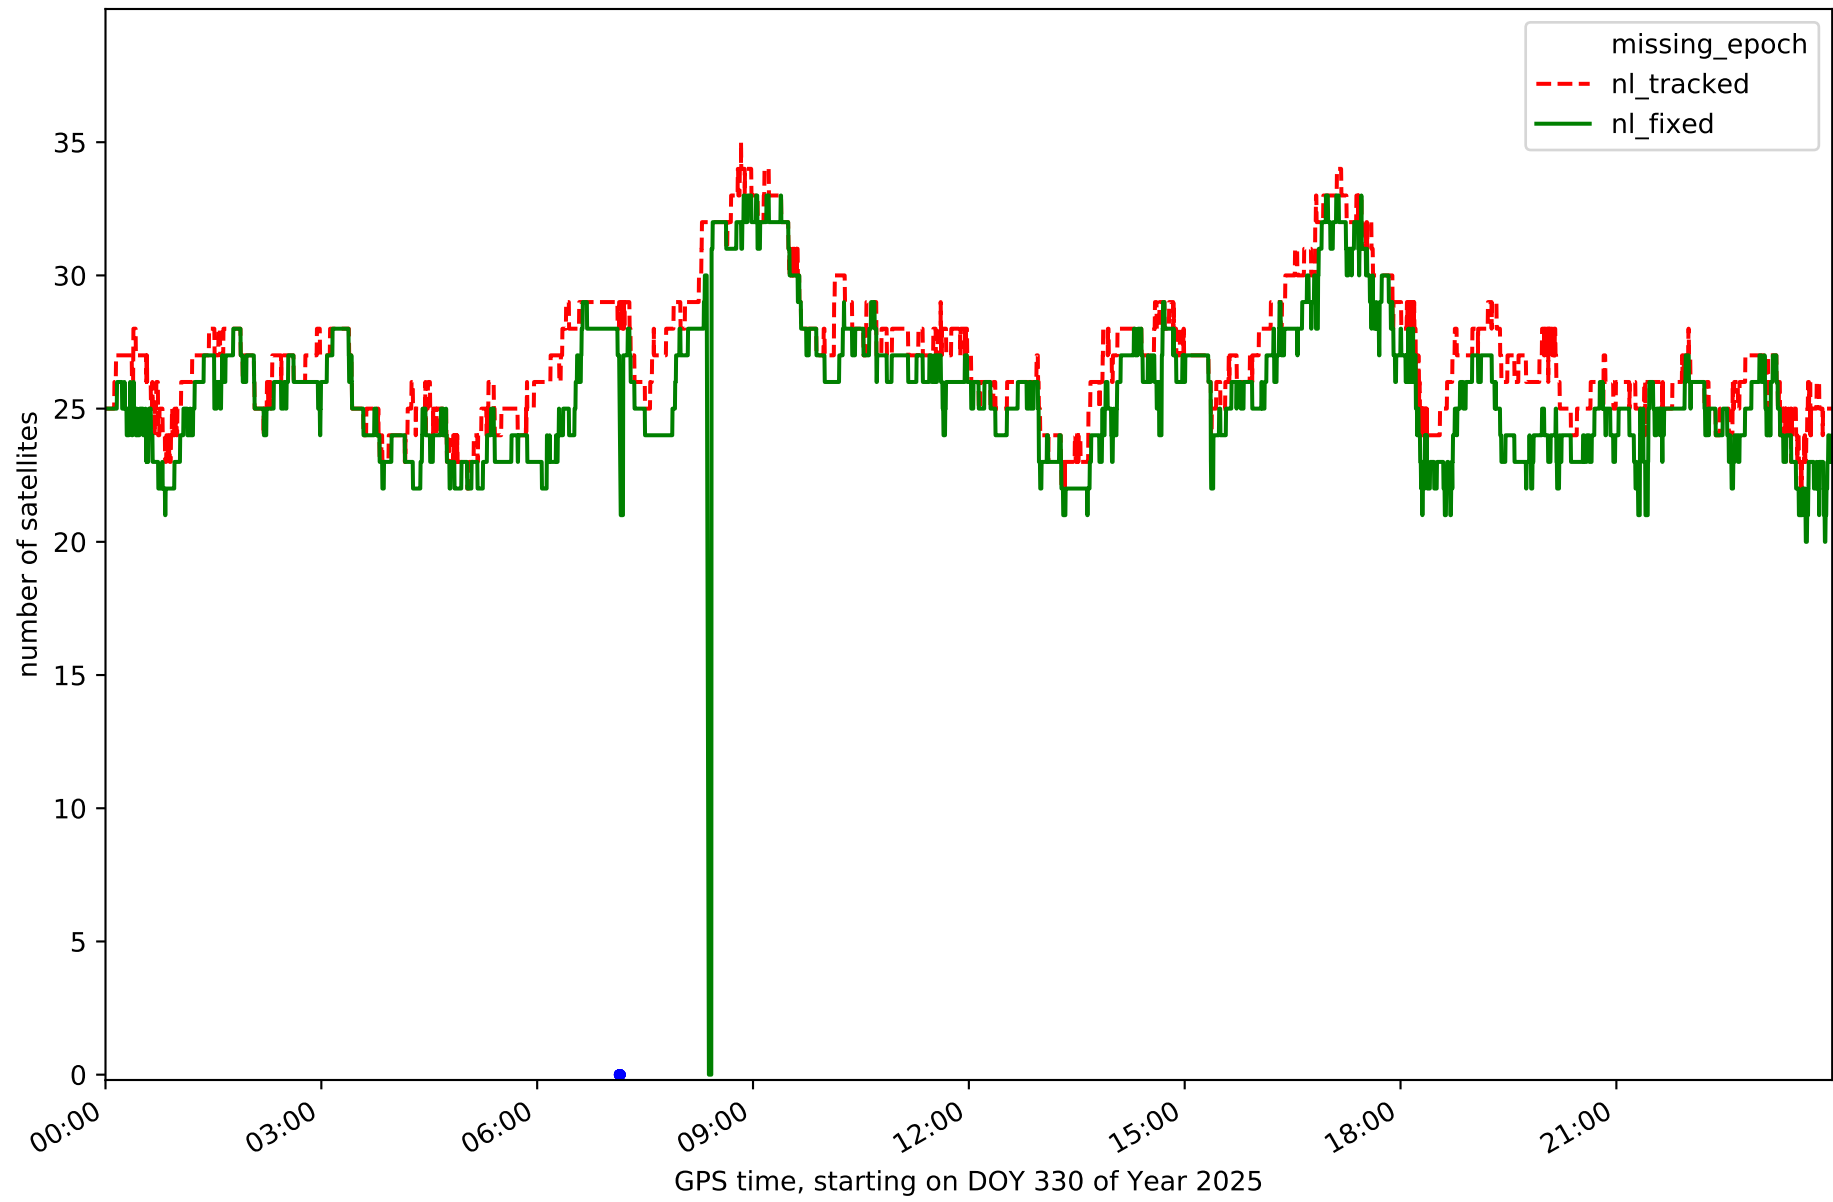


Station TE11 in network NT32

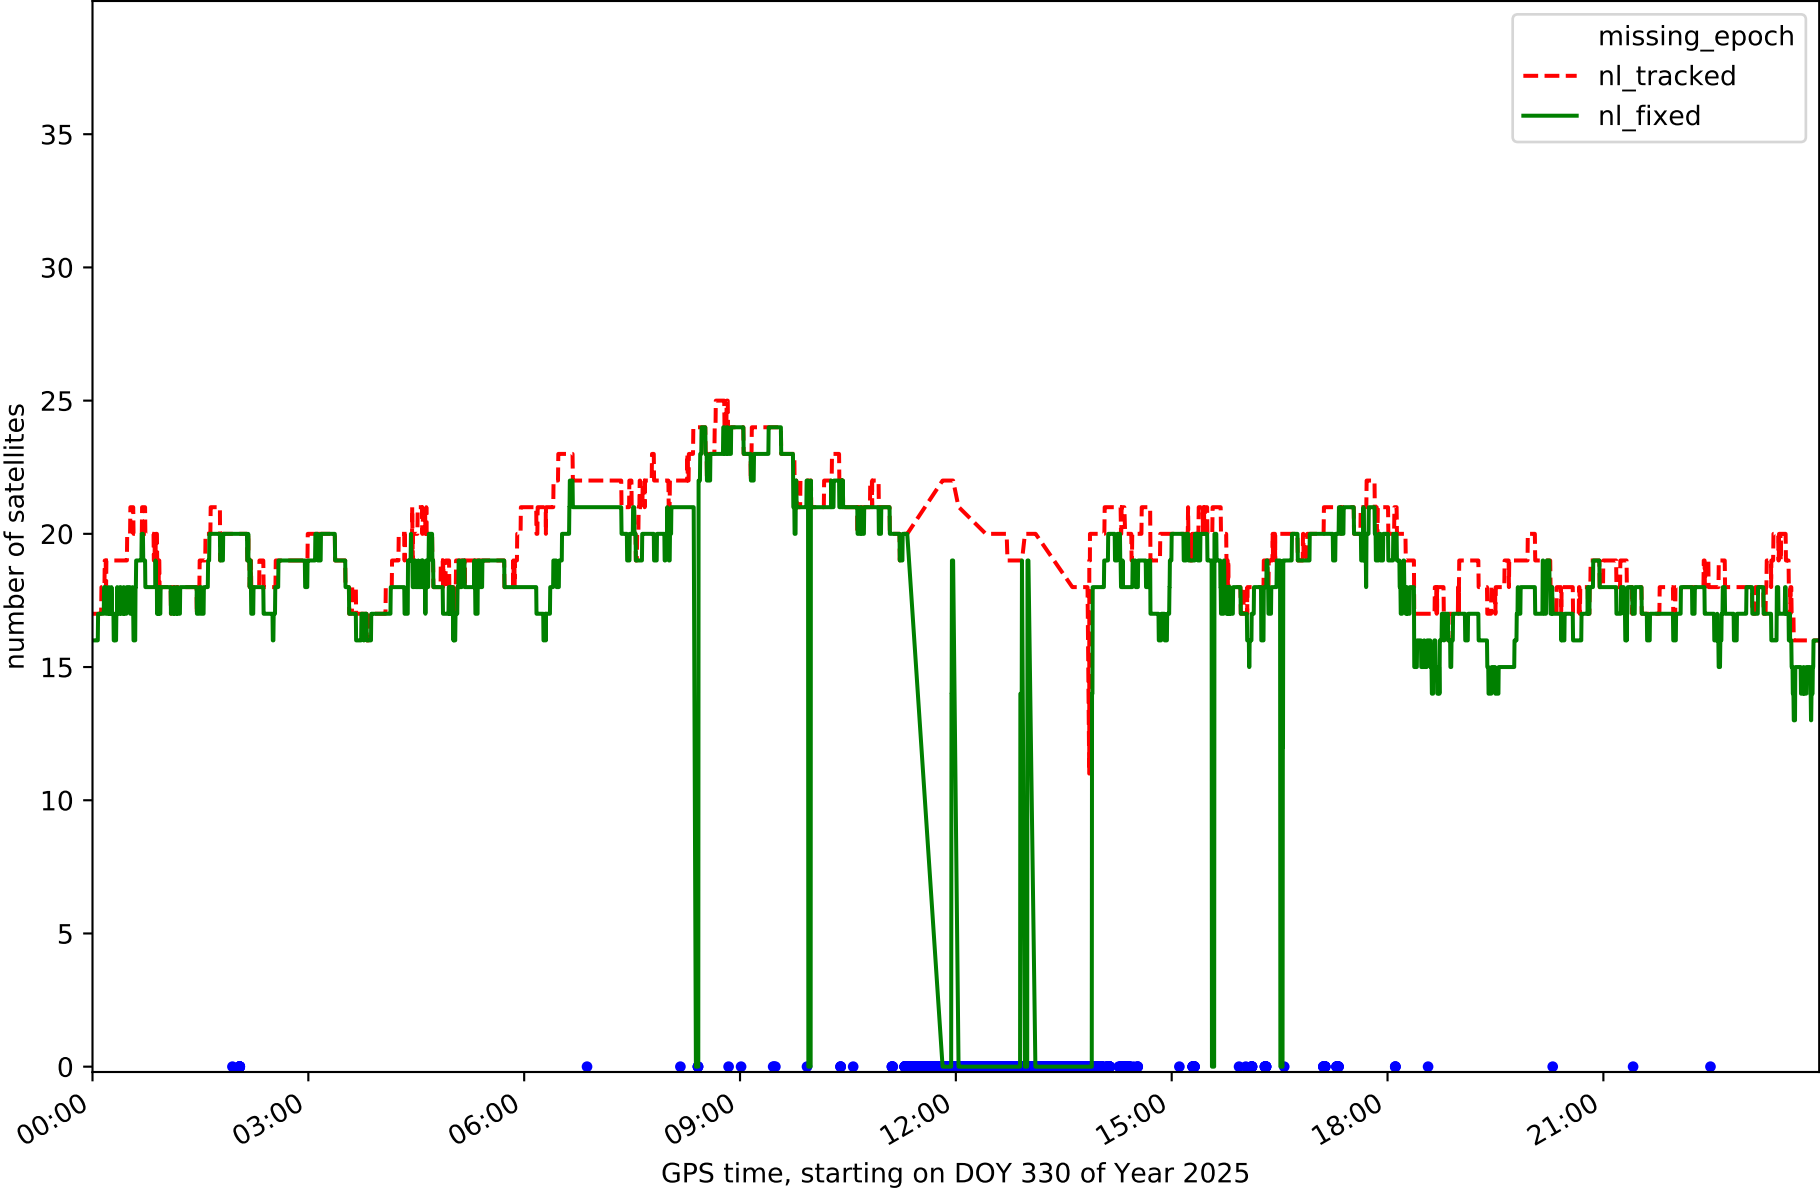


RefCheck for station EH01 in network NT32

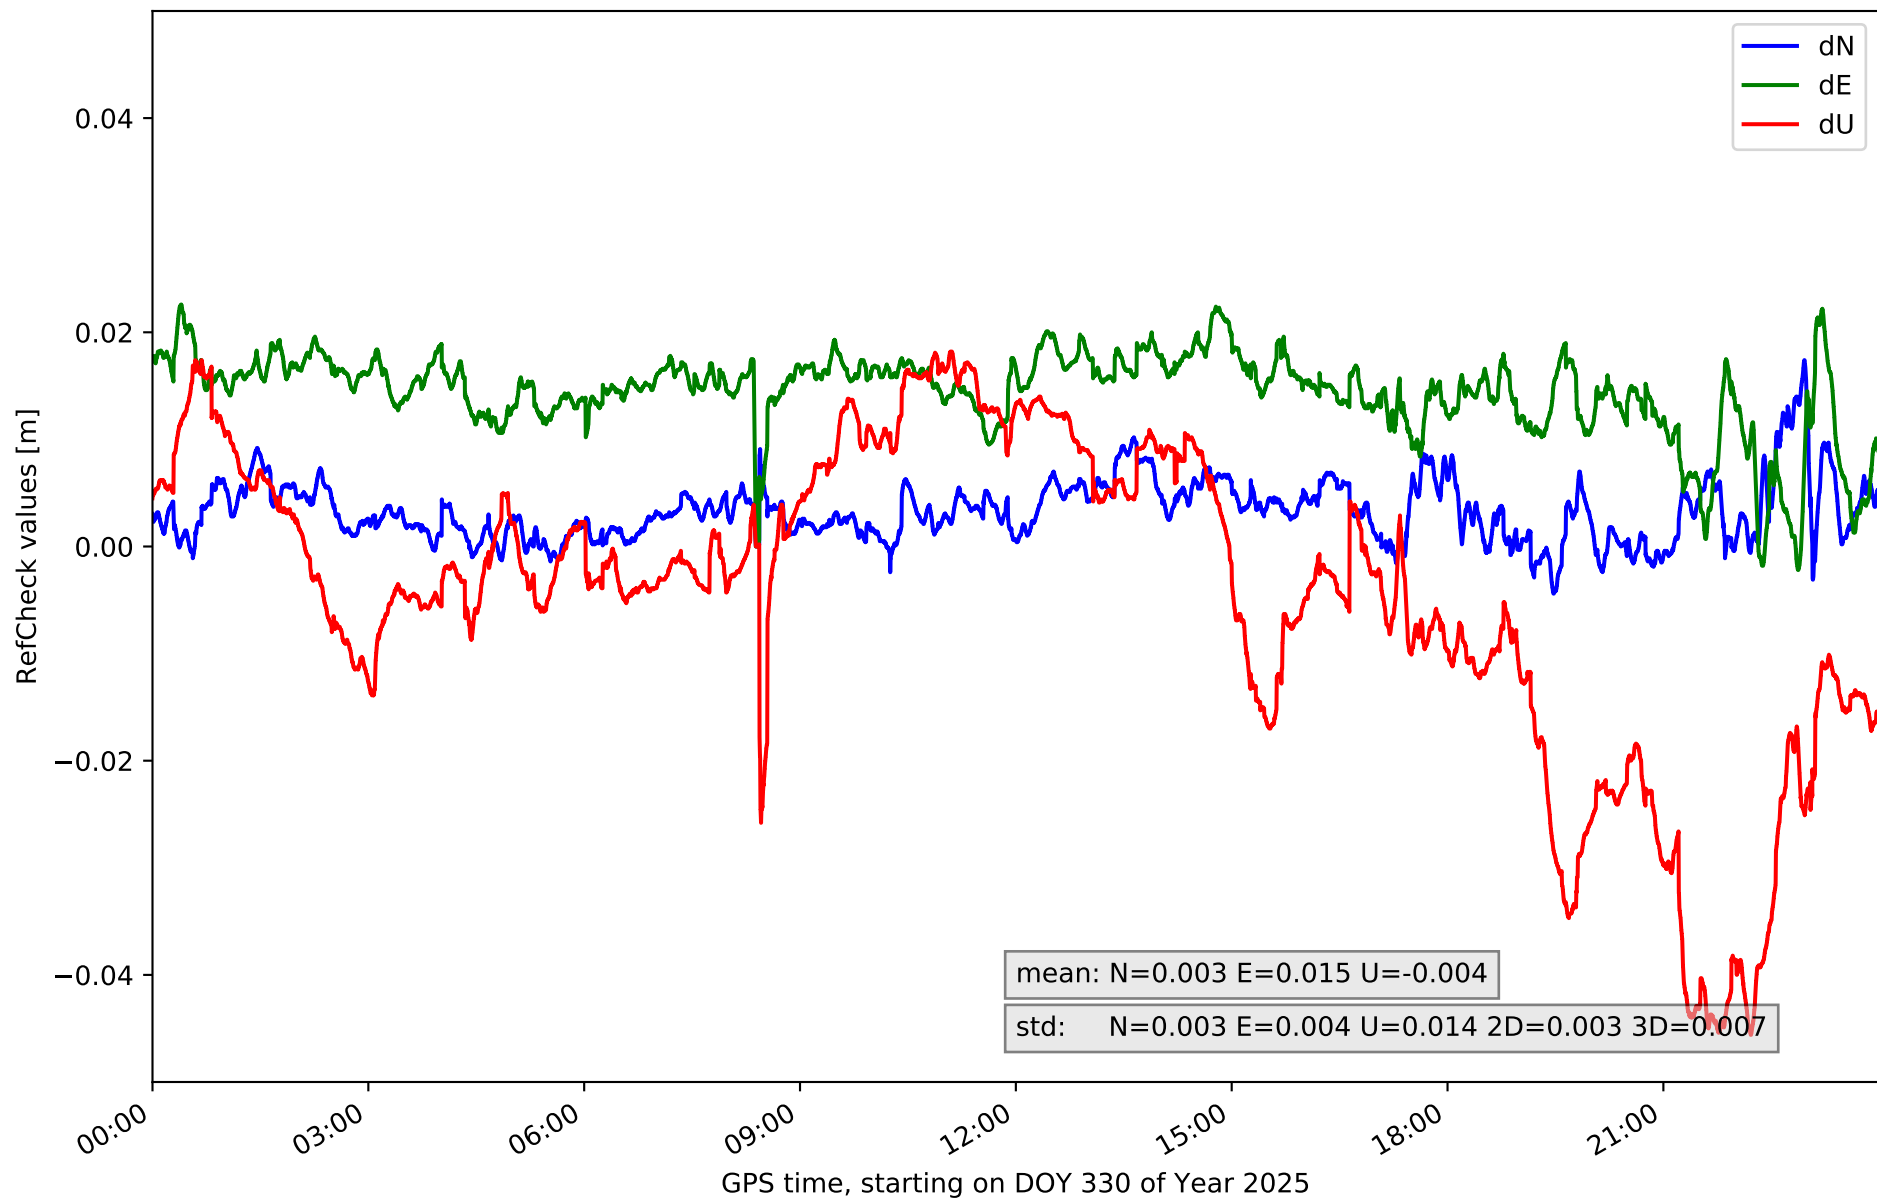


RefCheck for station EH02 in network NT32

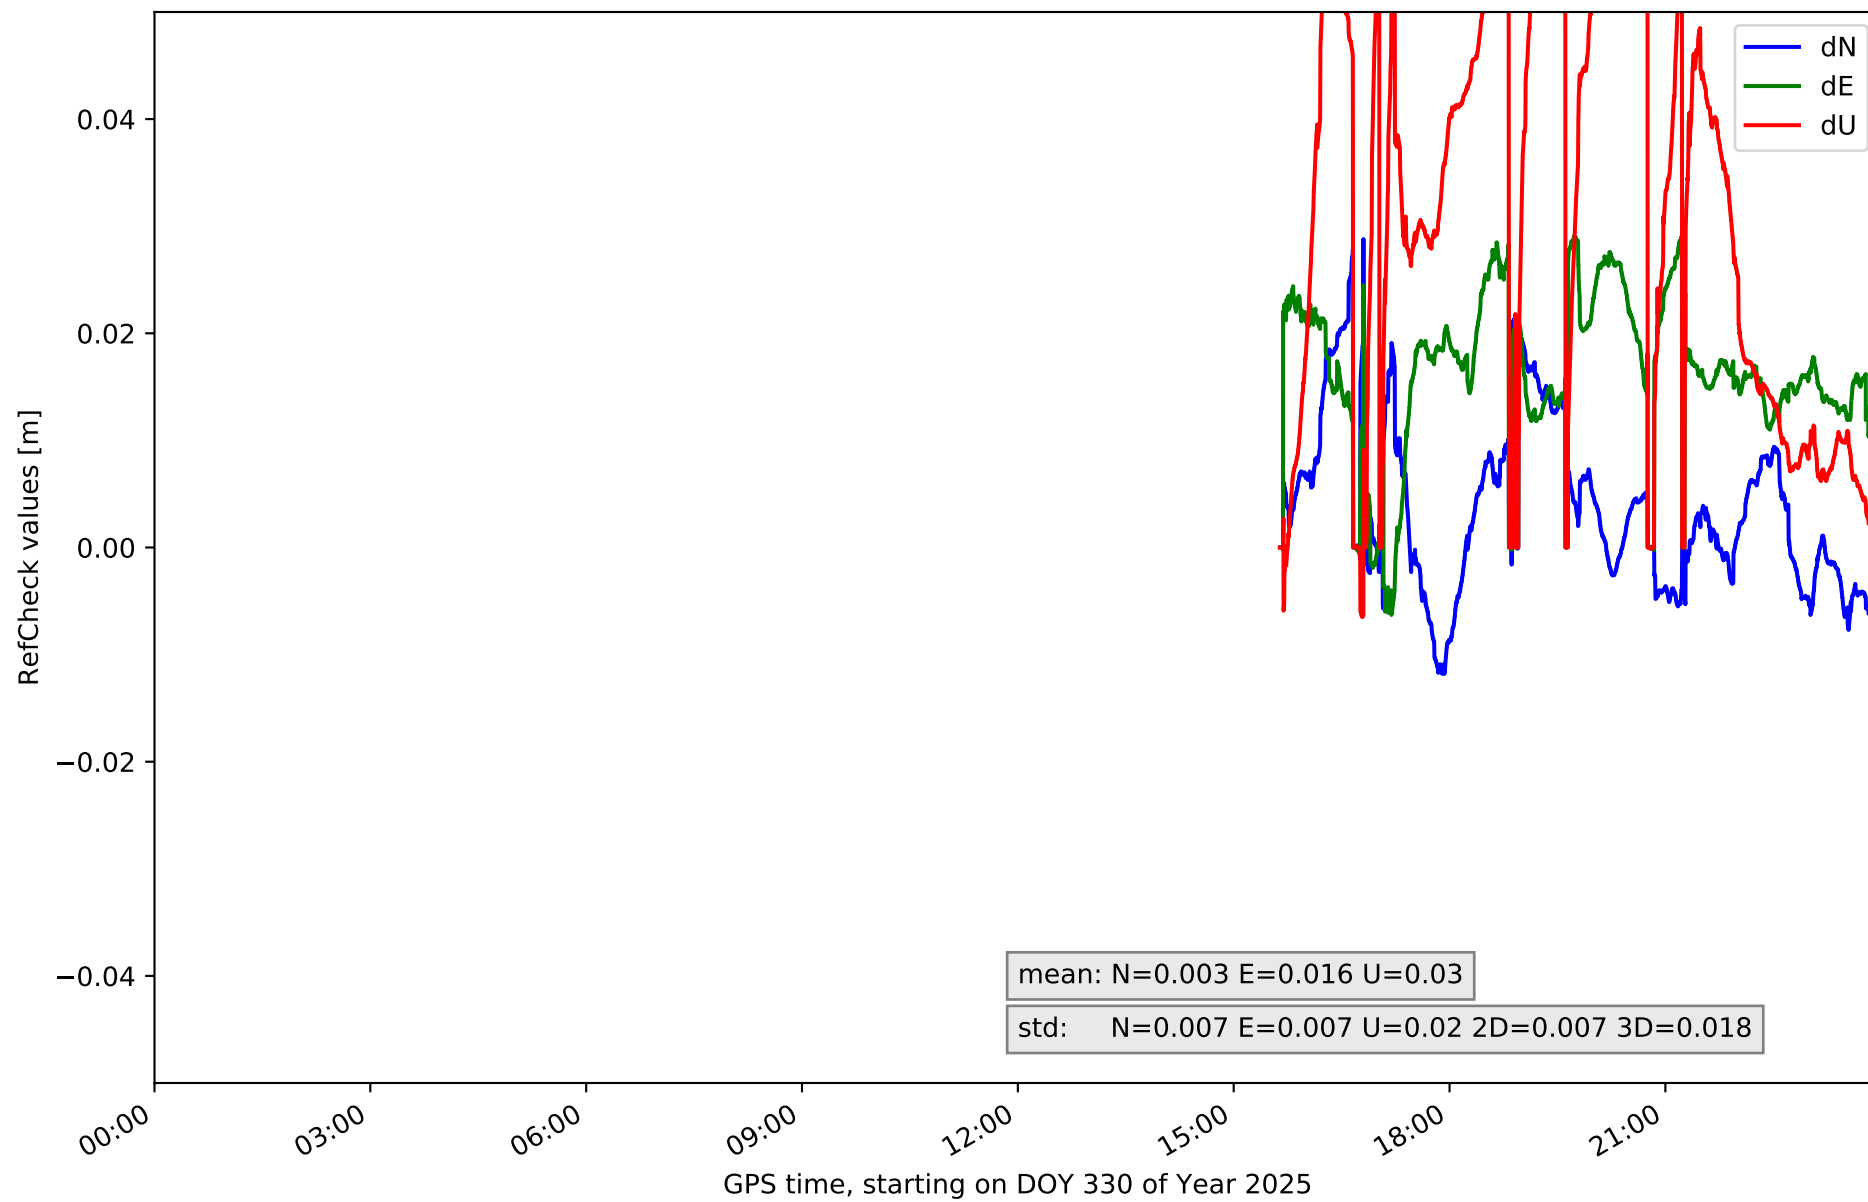


RefCheck for station GOM1 in network NT32

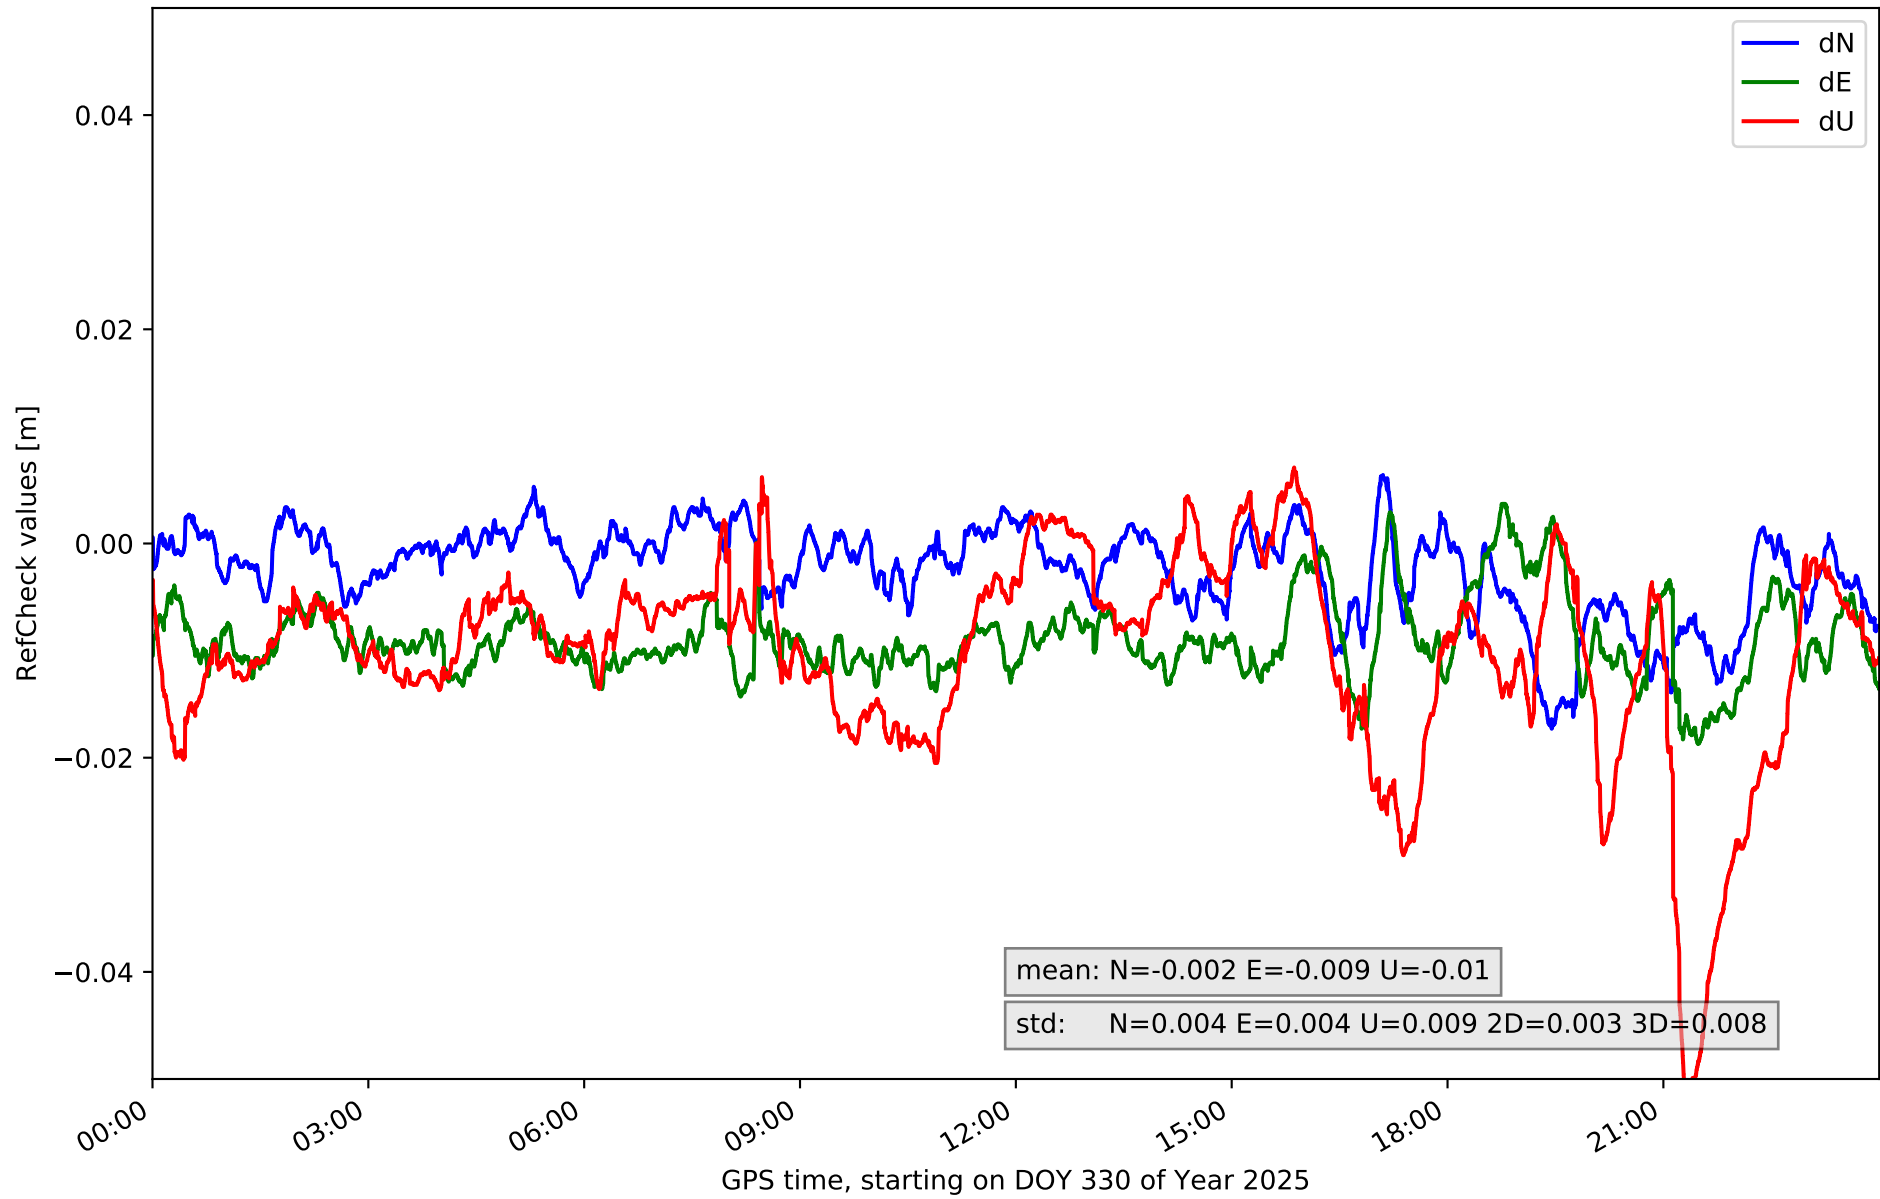


RefCheck for station GOME in network NT32

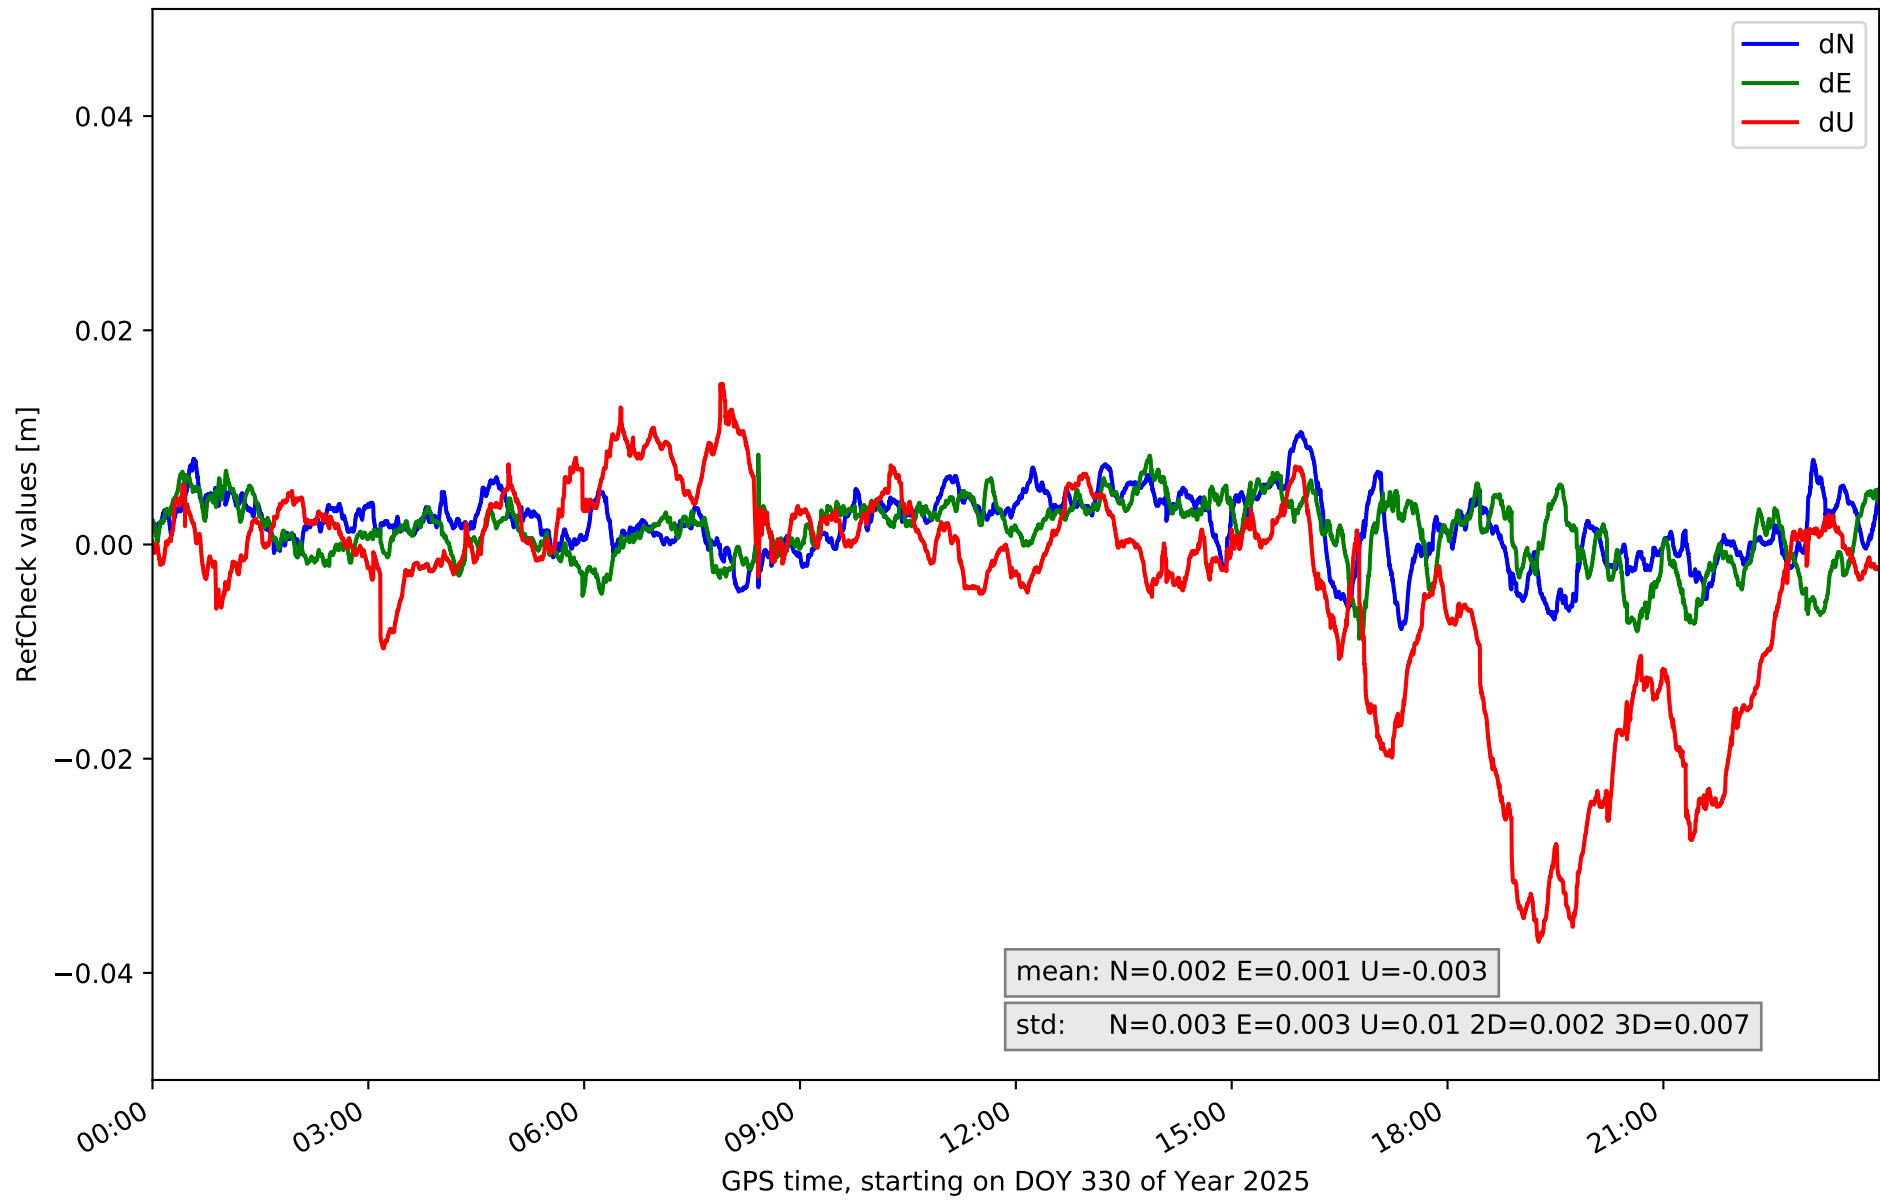


RefCheck for station IZAN in network NT32

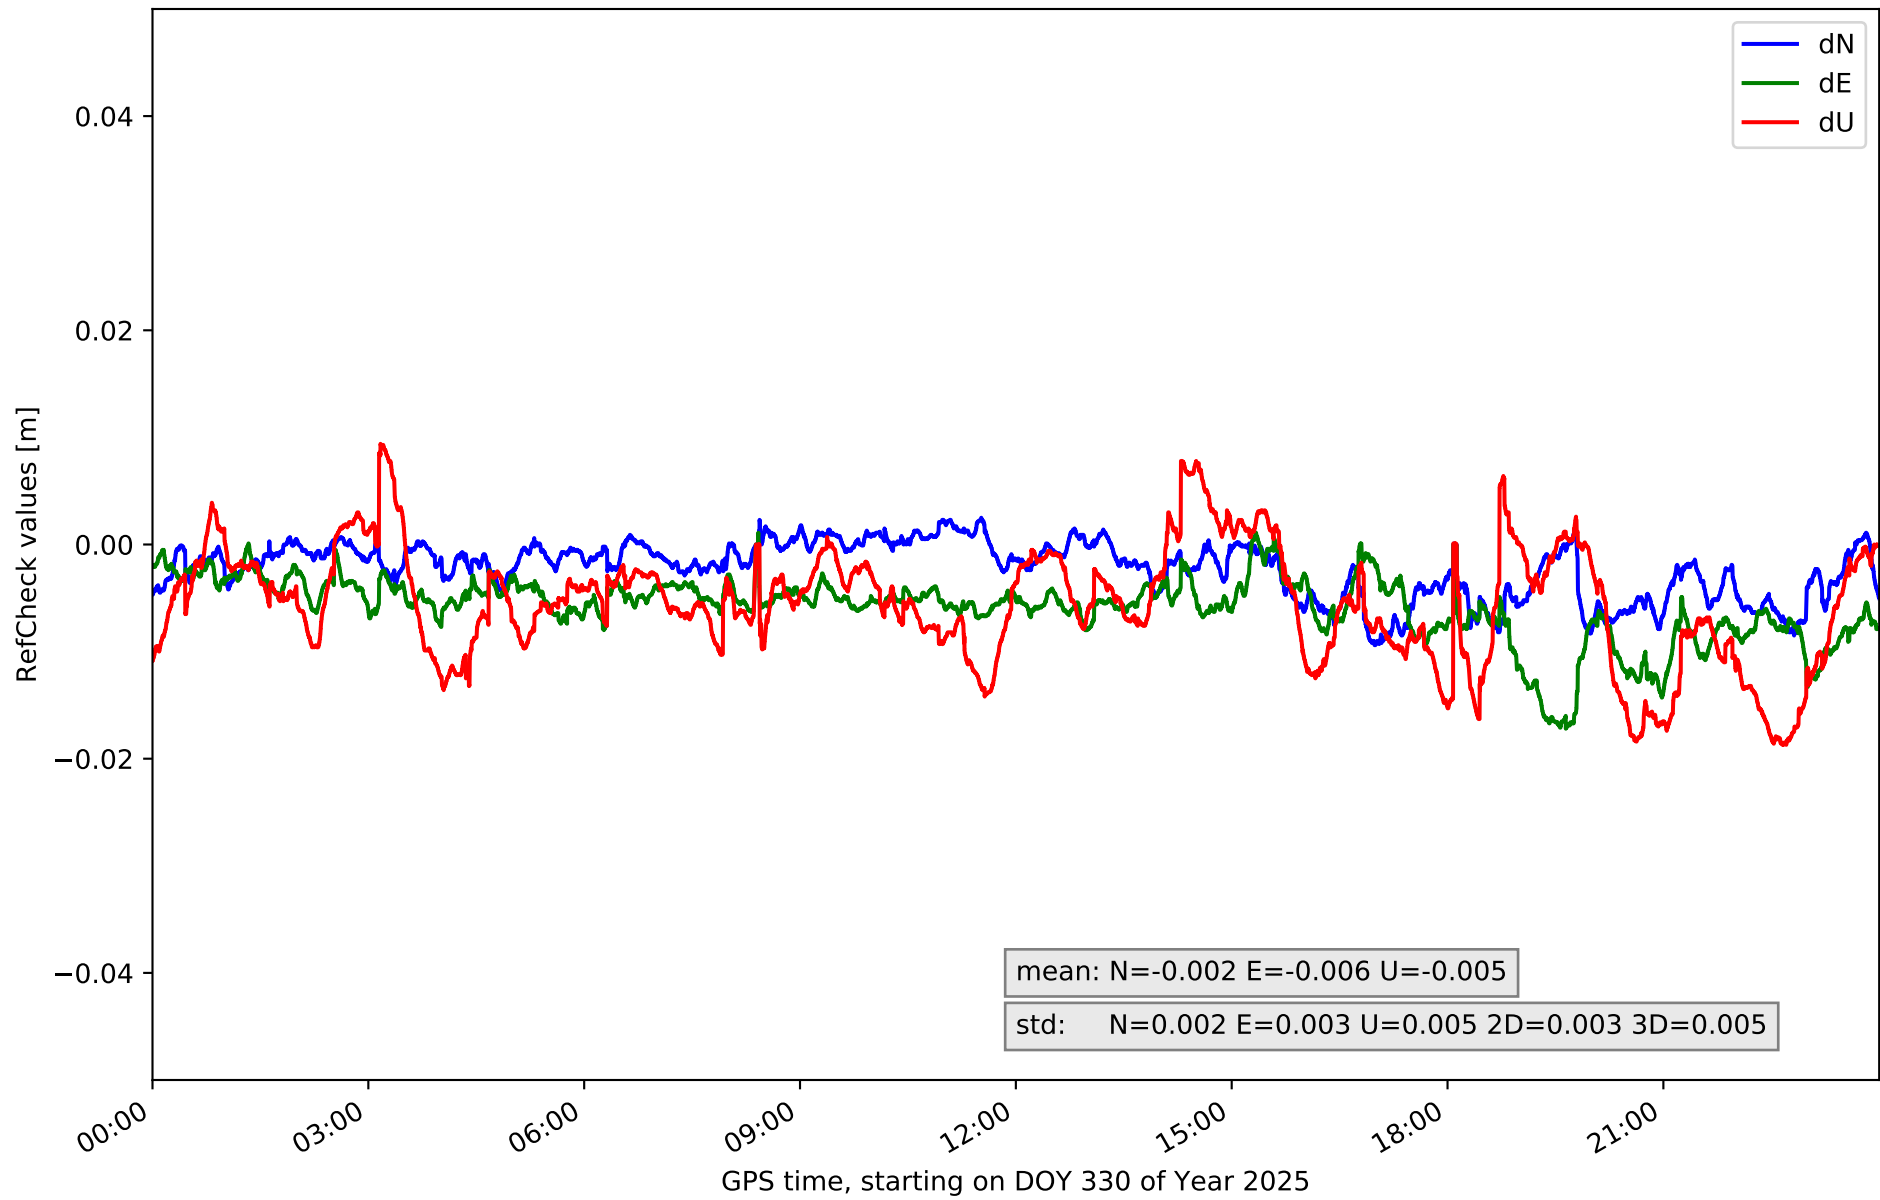


RefCheck for station LP01 in network NT32

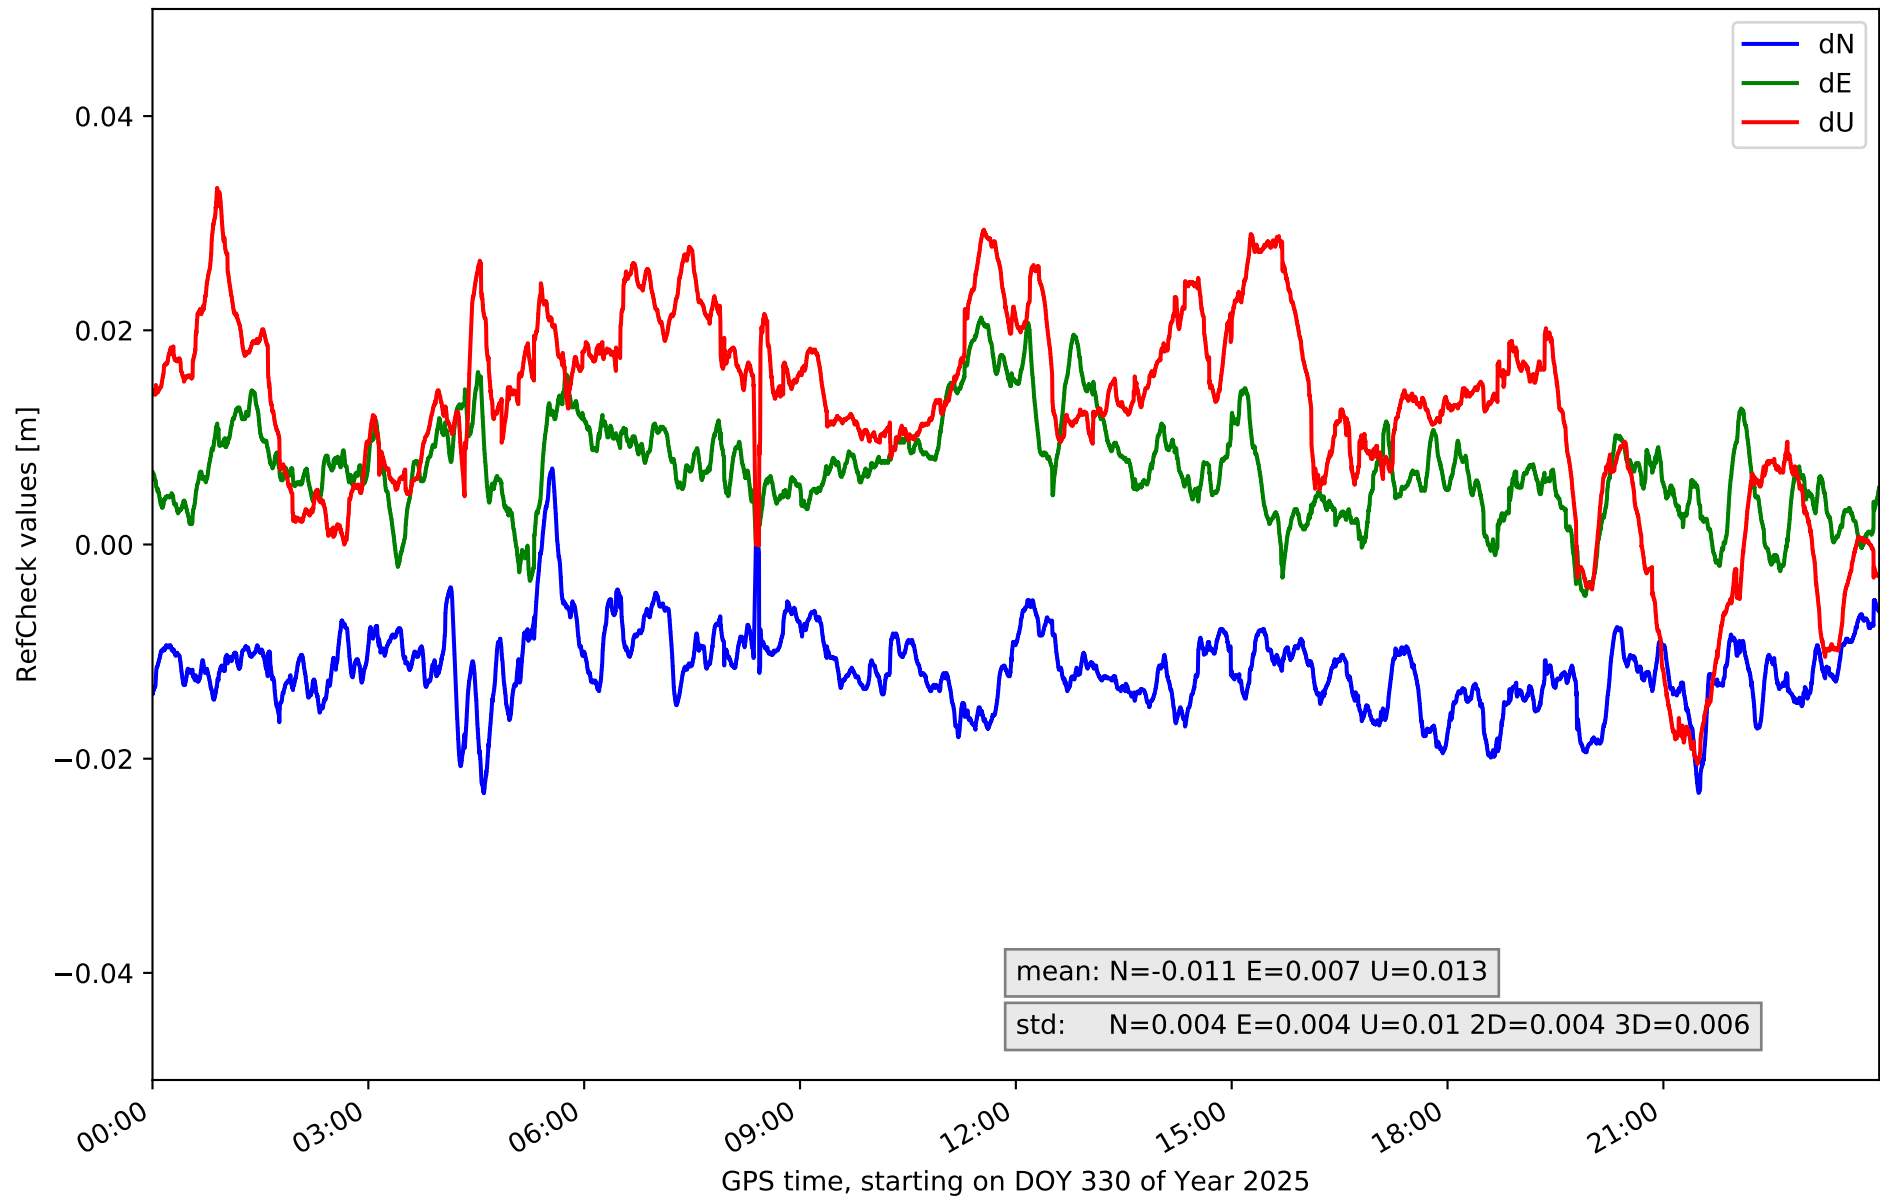


RefCheck for station LP03 in network NT32

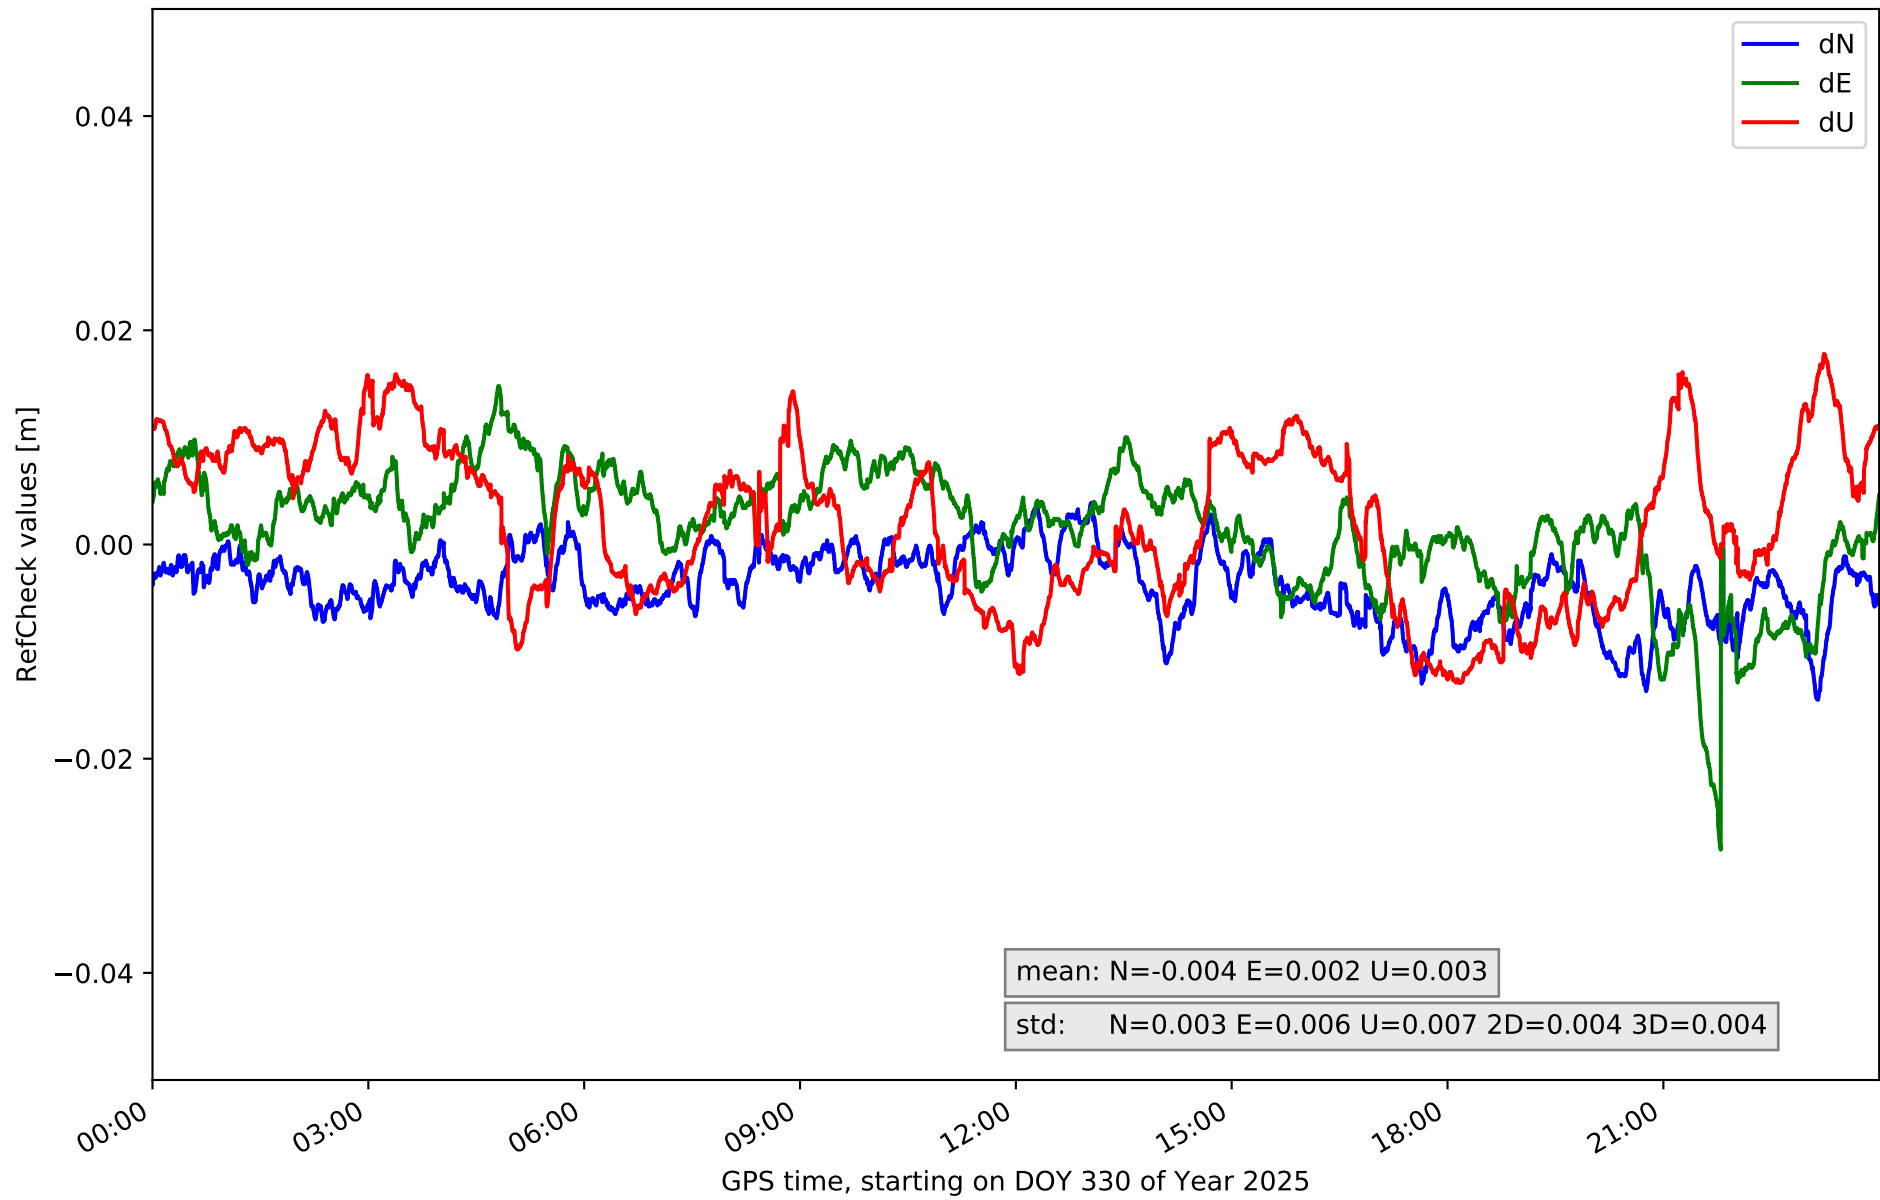


RefCheck for station LPAL in network NT32

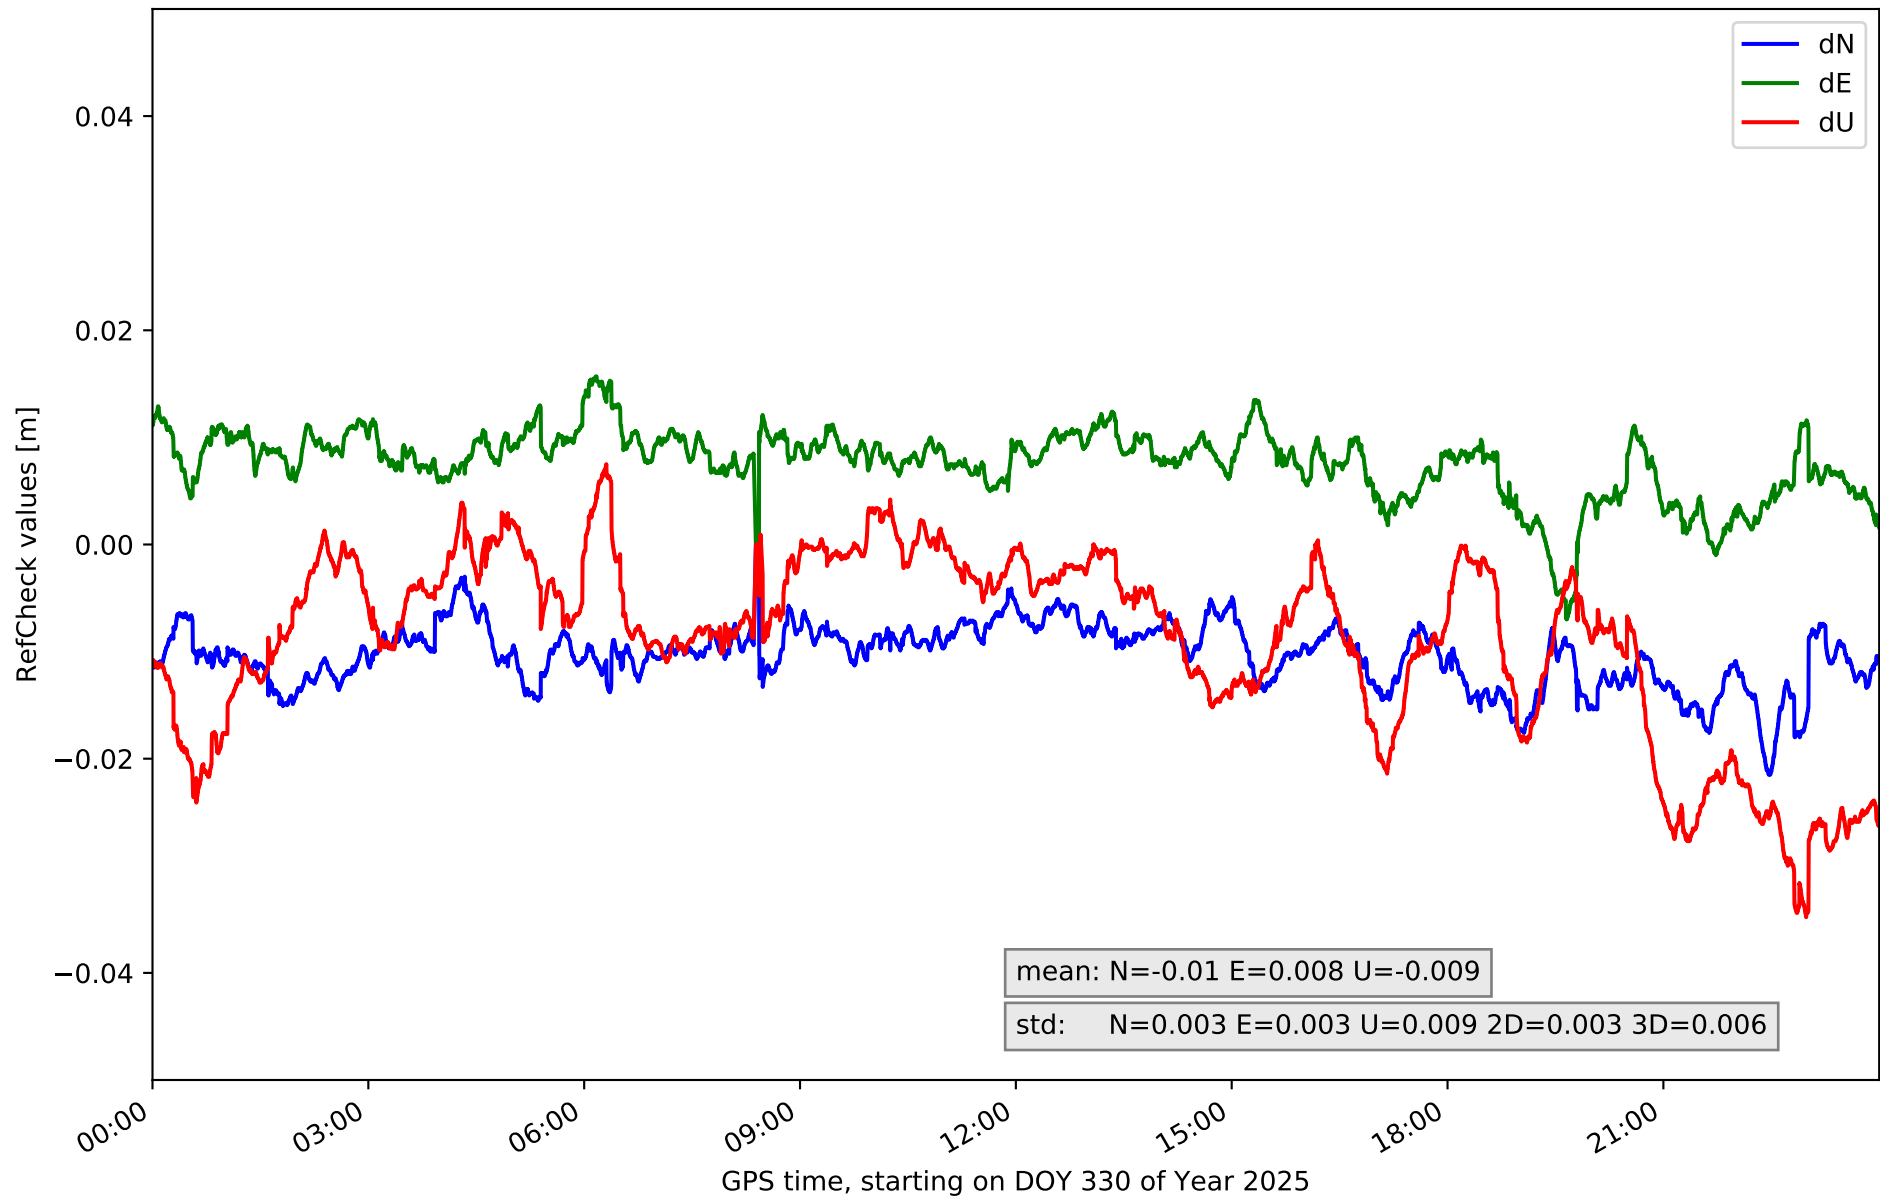


RefCheck for station LRES in network NT32

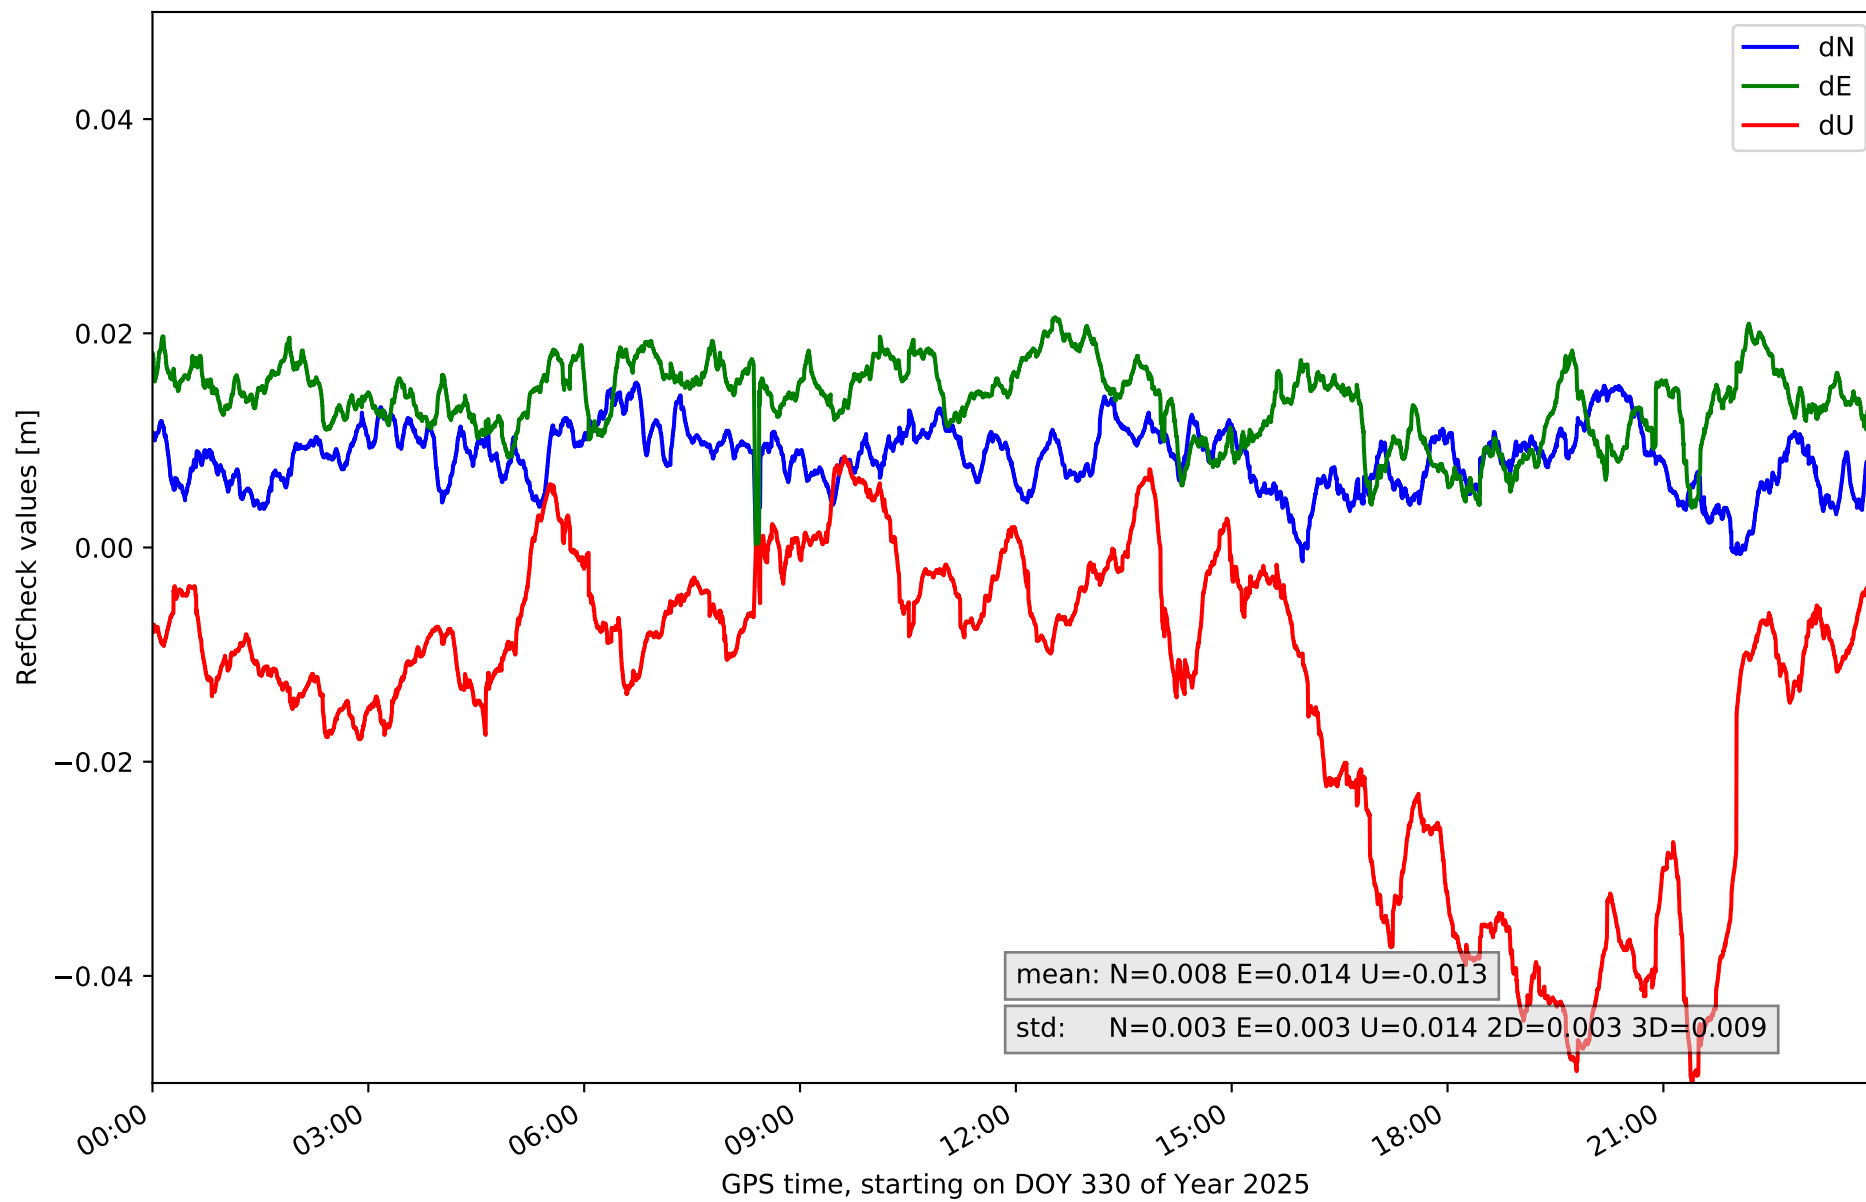


RefCheck for station TN01 in network NT32

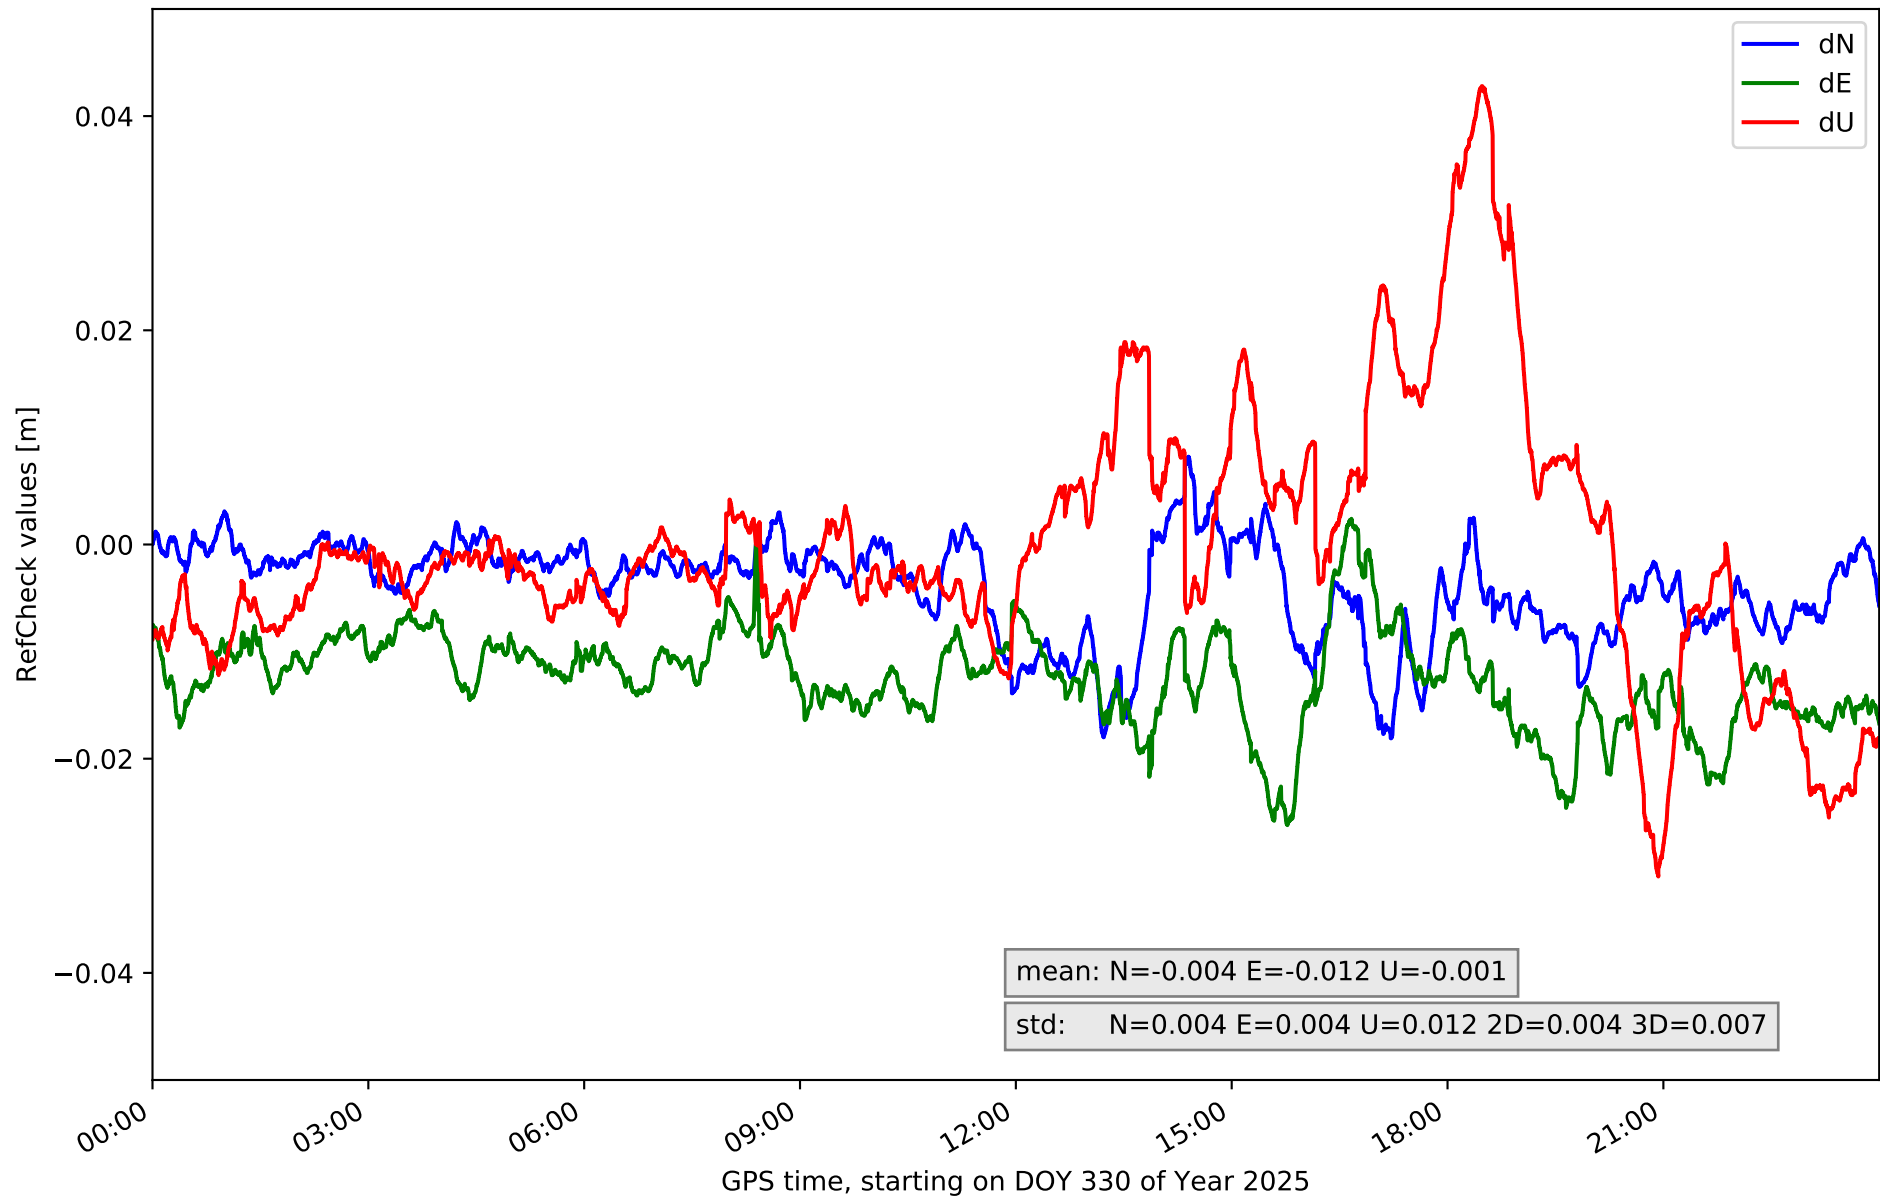


RefCheck for station TN02 in network NT32

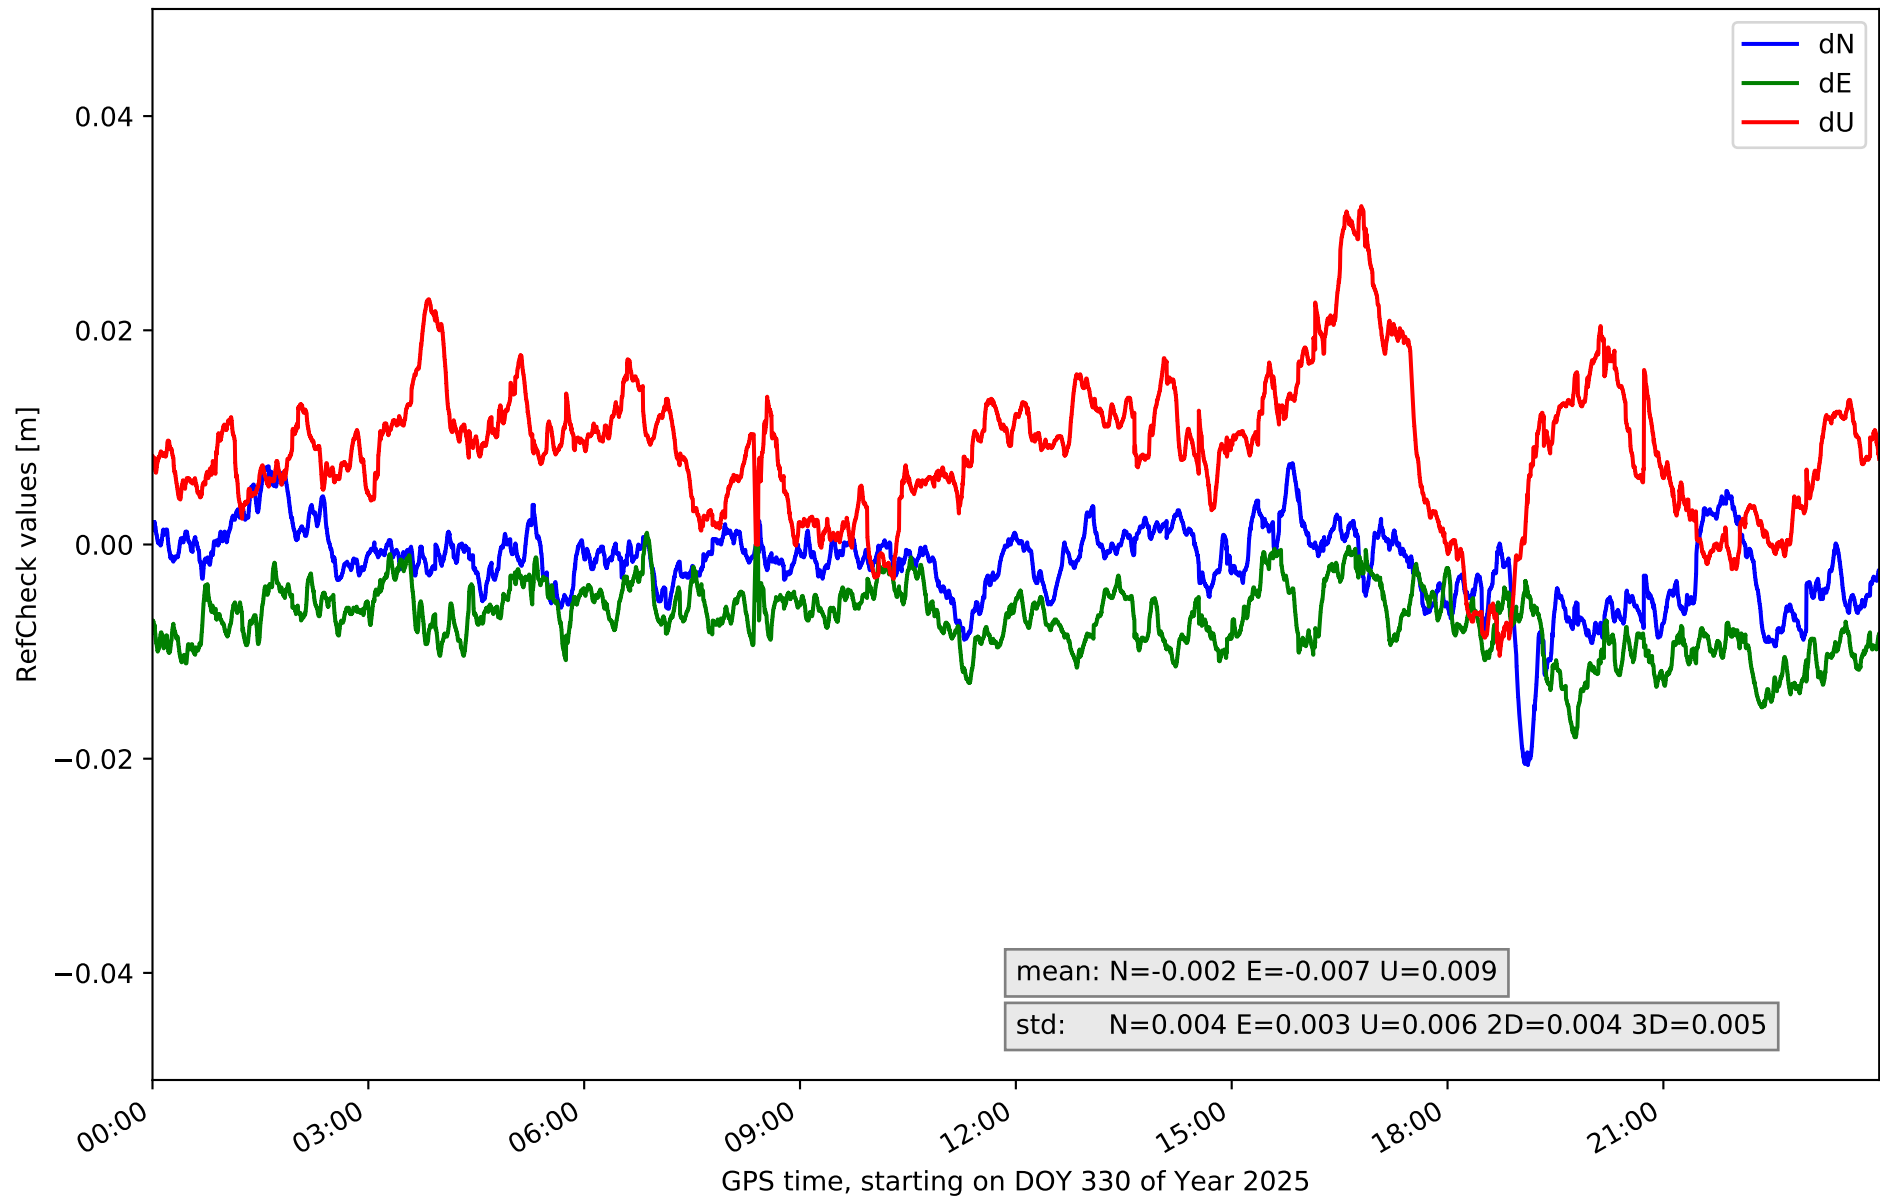


RefCheck for station TN03 in network NT32

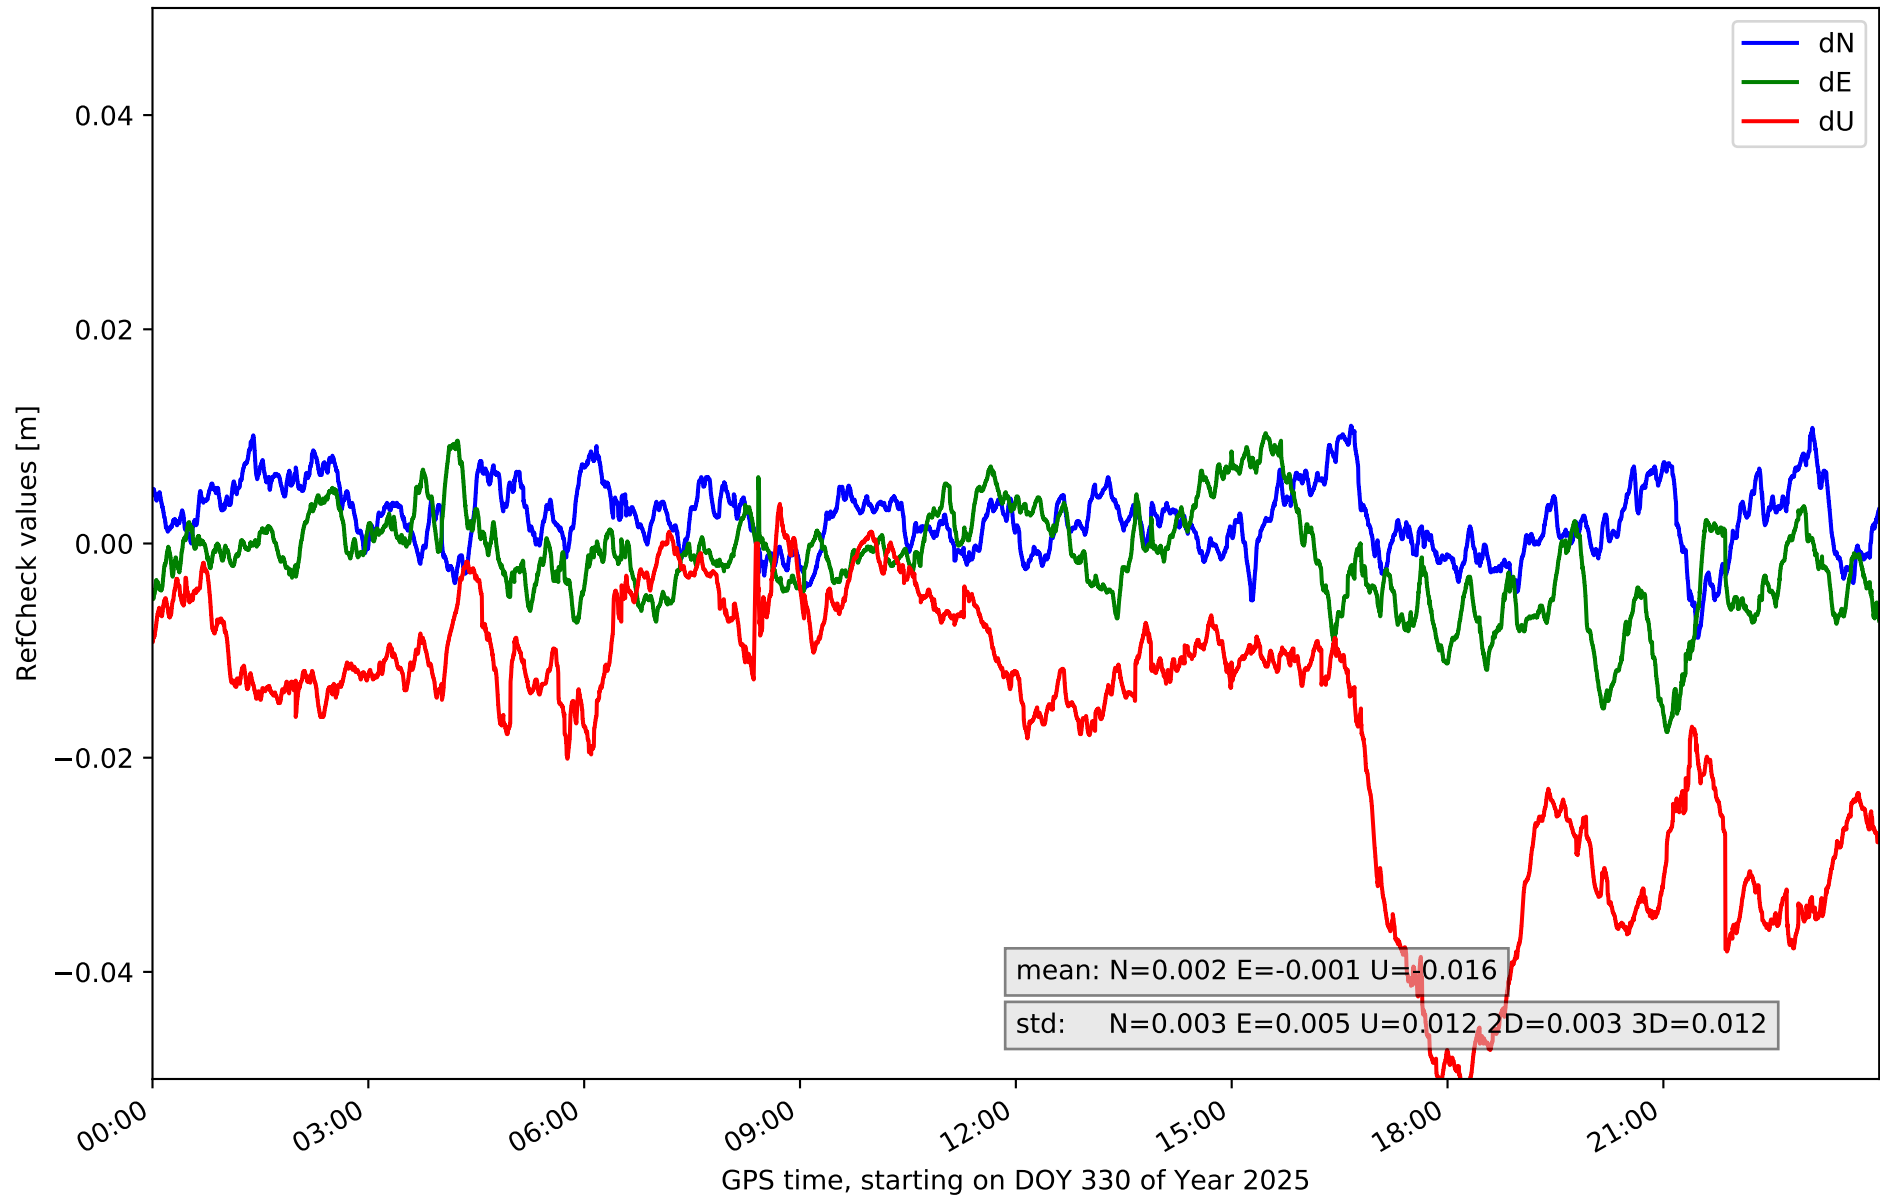


RefCheck for station TN06 in network NT32

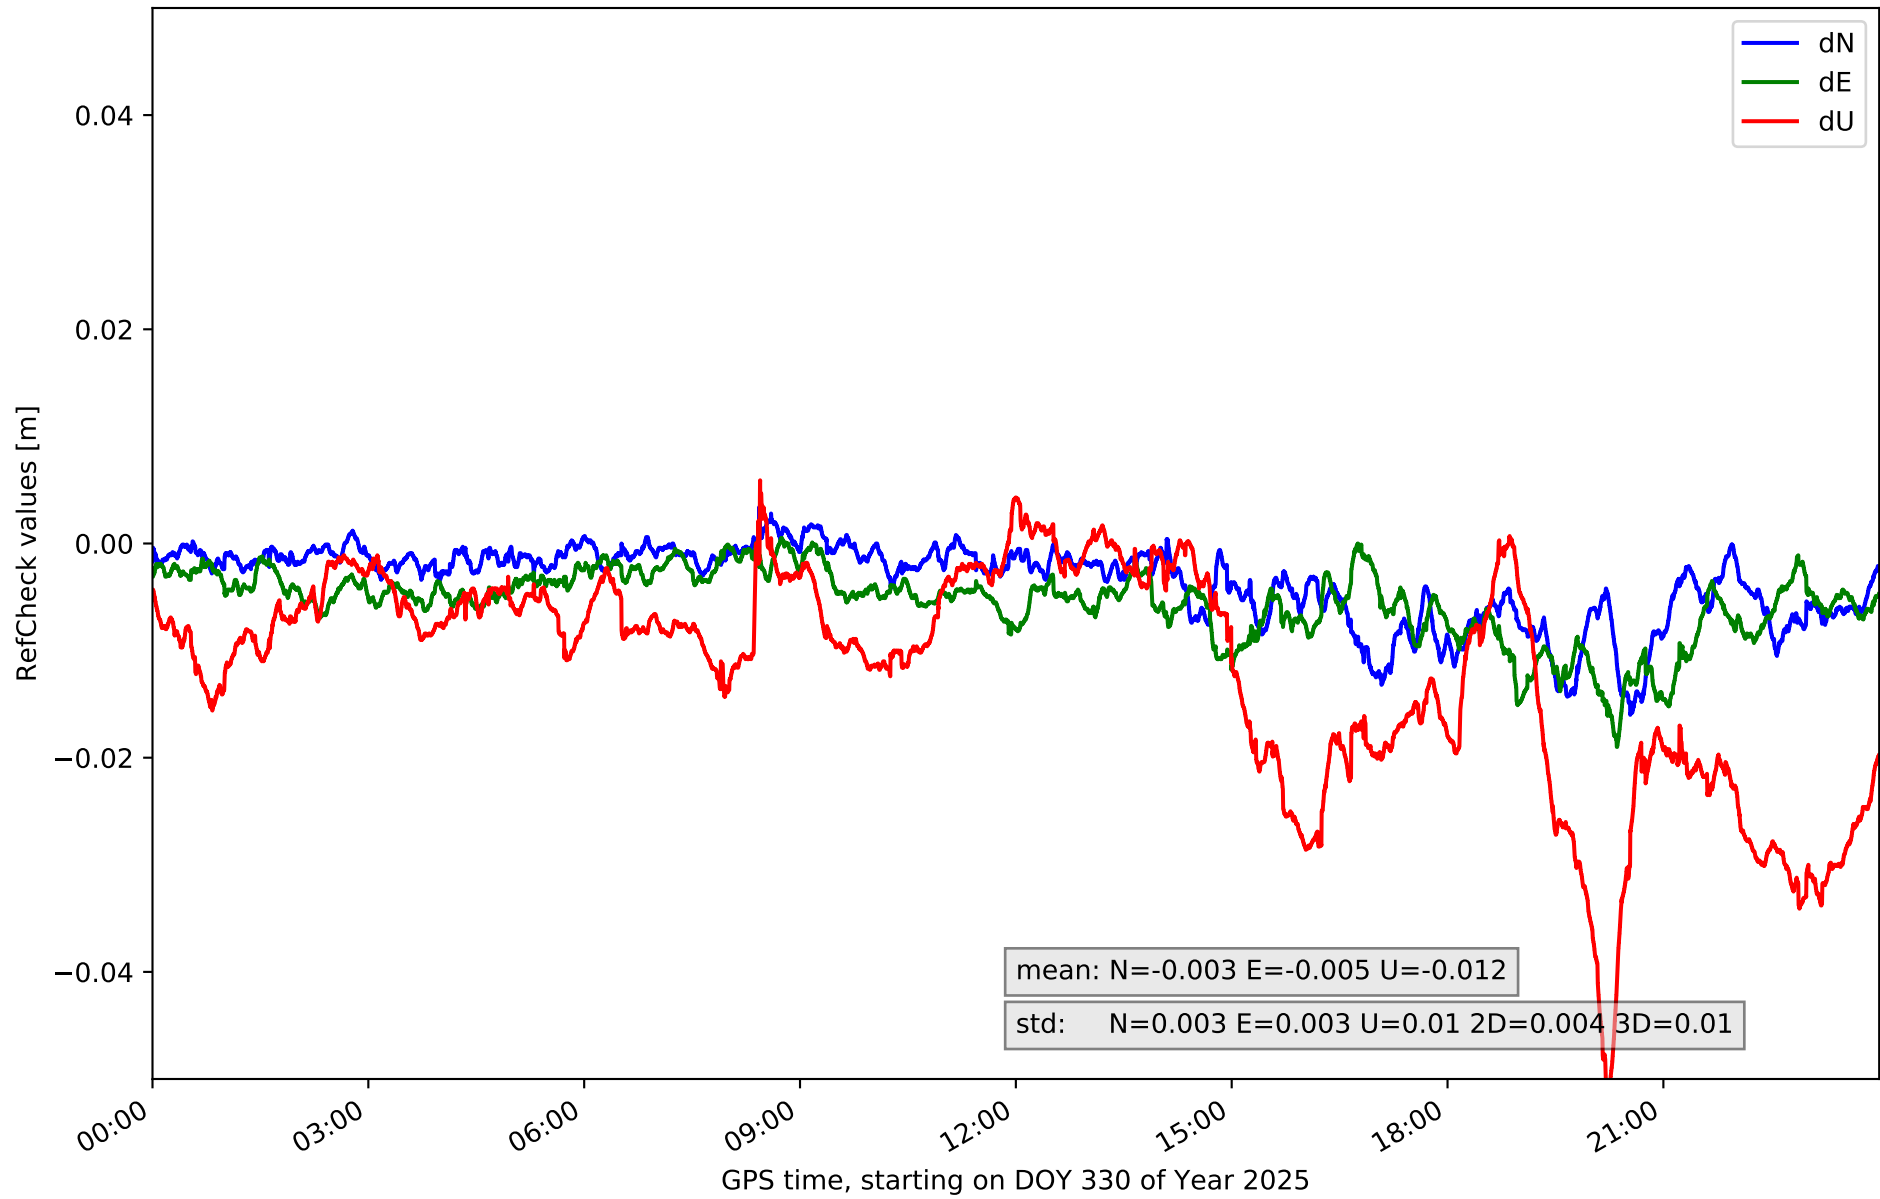

RefCheck for station TN09 in network NT32

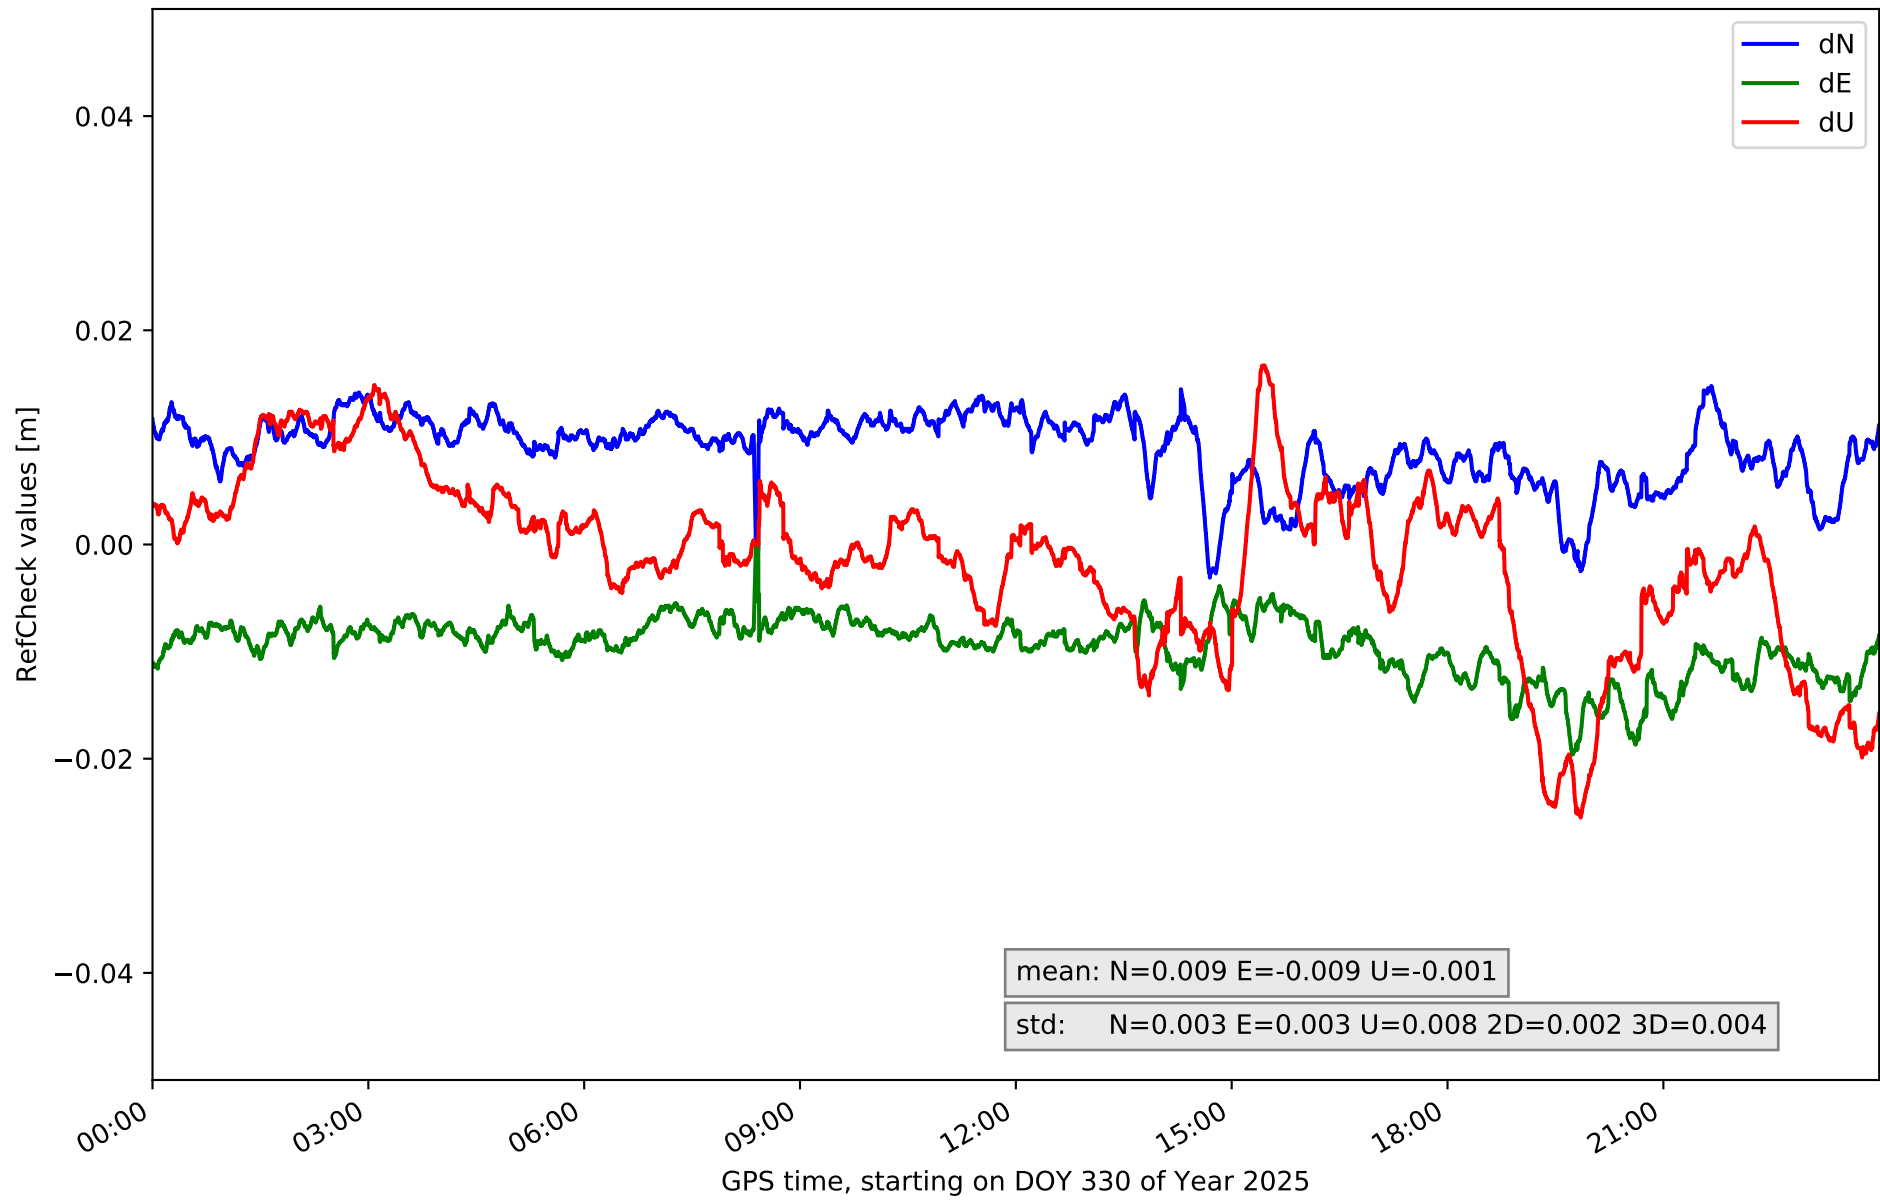

RefCheck for station TE11 in network NT32

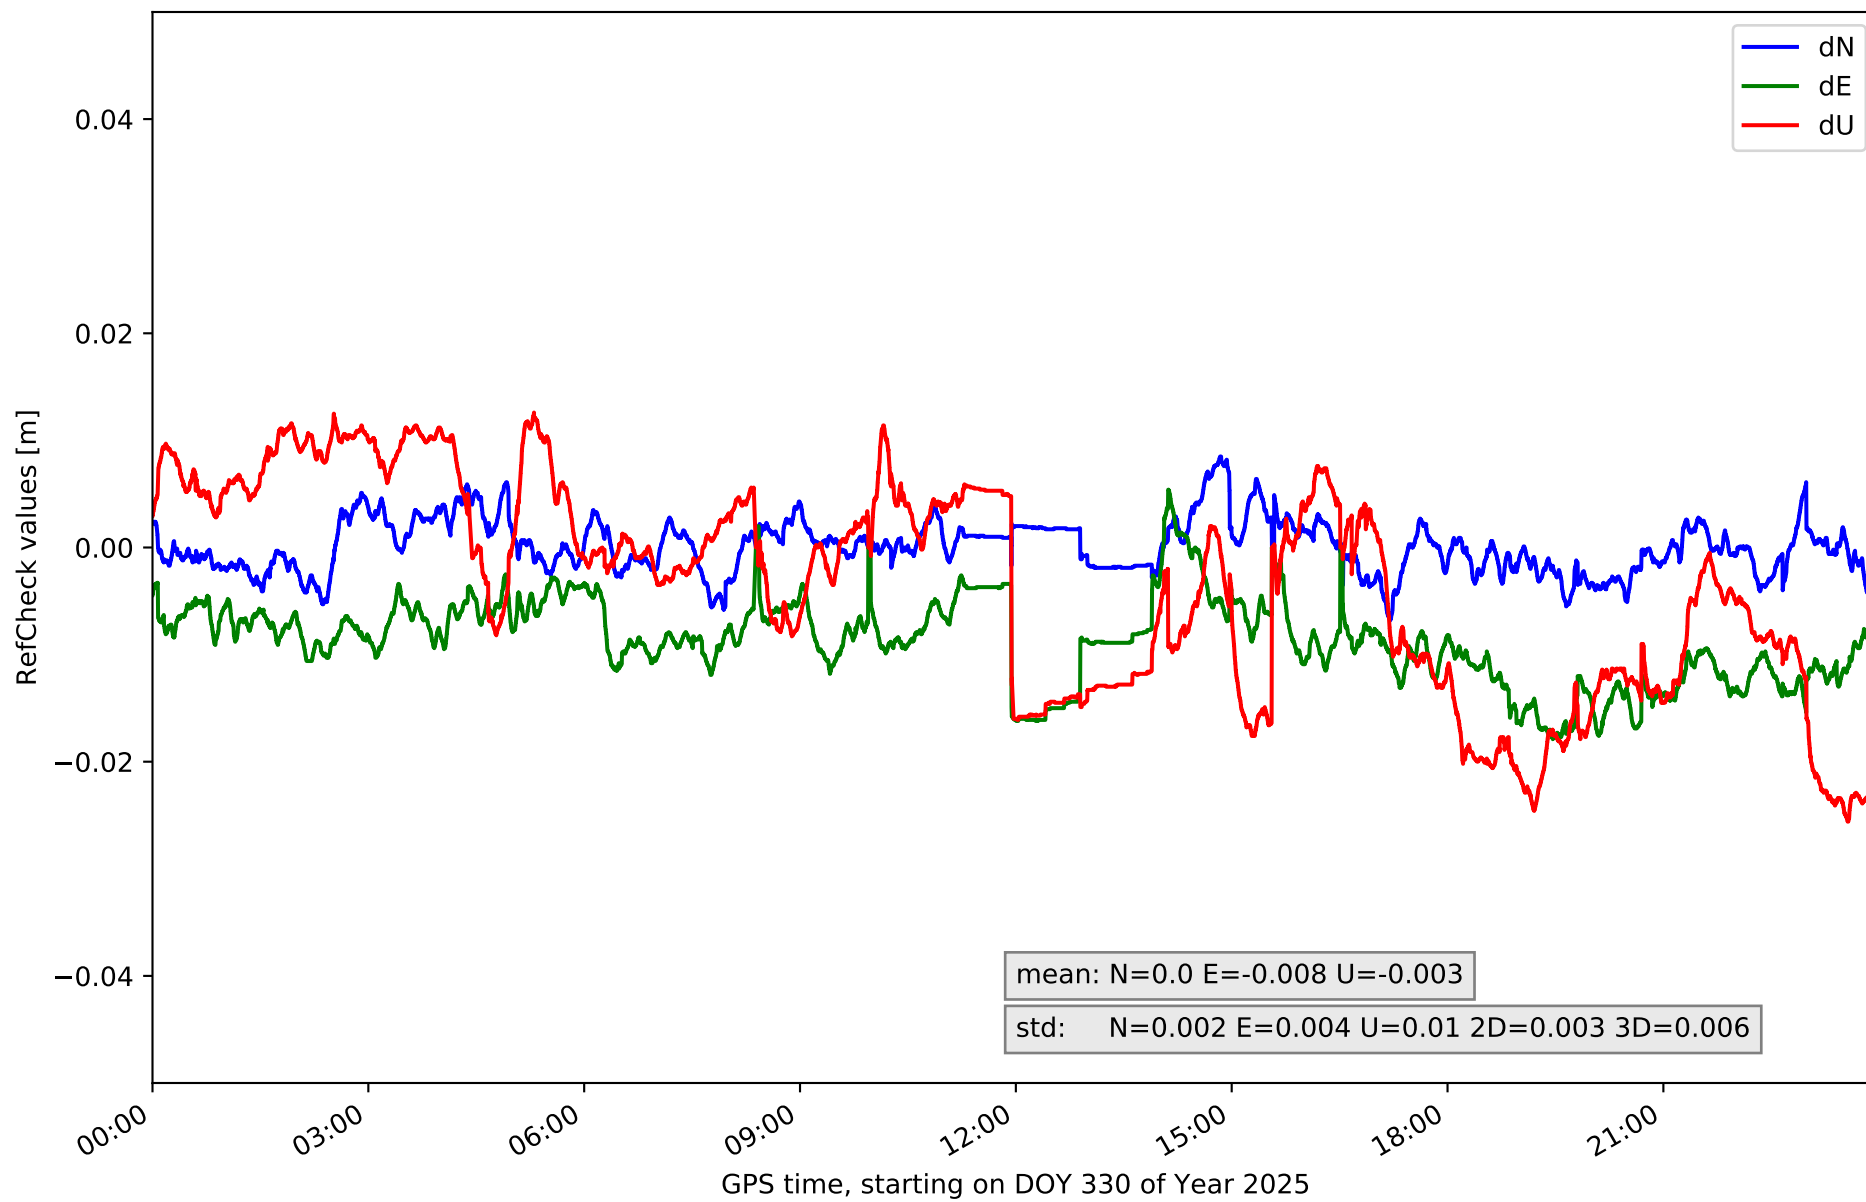

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.004	0.017	0.003	-0.002	0.023	0.004	-0.046	0.018	0.014	0.003	0.007	52791	93.4	21761	38.5
EH02	-0.012	0.029	0.007	-0.006	0.029	0.007	-0.006	0.064	0.02	0.007	0.018	16402	91.5	13549	75.6
GOM1	-0.017	0.006	0.004	-0.019	0.004	0.004	-0.052	0.007	0.009	0.003	0.008	30295	53.6	10105	17.9
GOME	-0.008	0.011	0.003	-0.009	0.008	0.003	-0.037	0.015	0.01	0.002	0.007	576	1.0	5265	9.3
IZAN	-0.009	0.003	0.002	-0.017	0.001	0.003	-0.019	0.009	0.005	0.003	0.005	8388	14.8	2278	4.0
LP01	-0.023	0.007	0.004	-0.005	0.021	0.004	-0.021	0.033	0.01	0.004	0.006	51772	91.6	29805	52.7
LP03	-0.015	0.004	0.003	-0.029	0.015	0.006	-0.013	0.018	0.007	0.004	0.004	8121	14.4	949	1.7
LPAL	-0.021	-0.0	0.003	-0.007	0.016	0.003	-0.035	0.007	0.009	0.003	0.006	52291	92.5	13191	23.3
LRES	-0.001	0.015	0.003	0.0	0.021	0.003	-0.05	0.009	0.014	0.003	0.009	54605	96.6	31907	56.5
TN01	-0.018	0.008	0.004	-0.026	0.002	0.004	-0.031	0.043	0.012	0.004	0.007	44336	78.4	16891	29.9
TN02	-0.021	0.008	0.004	-0.018	0.001	0.003	-0.01	0.032	0.006	0.004	0.005	12357	21.9	5073	9.0
TN03	-0.009	0.011	0.003	-0.018	0.01	0.005	-0.051	0.004	0.012	0.003	0.012	4095	7.2	15789	27.9
TN06	-0.016	0.003	0.003	-0.019	0.002	0.003	-0.052	0.006	0.01	0.004	0.01	10742	19.0	14919	26.4
TN09	-0.003	0.015	0.003	-0.02	0.0	0.003	-0.025	0.017	0.008	0.002	0.004	52948	93.7	5965	10.6
TE11	-0.007	0.009	0.002	-0.018	0.005	0.004	-0.026	0.013	0.01	0.003	0.006	18718	33.1	8815	15.6
Mean	-0.012	0.01	0.003	-0.014	0.011	0.004	-0.032	0.02	0.01	0.003	0.008	27895.8	53.5	13084.1	26.6
Min/Max	-0.023	0.029	0.007	-0.029	0.029	0.007	-0.052	0.064	0.02	0.007	0.018	54605	96.6	31907	75.6

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	94.3	93.9	93.5	95.5	94.1
considering satellites with dual-frequency fixed	92.6	92.2	91.3	94.2	92.5
considering all signals separately	92.7	92.2	91.3	94.6	91.5