

summary for network N32T

timeperiod chosen: from 2025-11-29-00:00:00 until 2025-11-29-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.3 seconds


average fixing percentage with threshold set to 0.3: 93.3 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

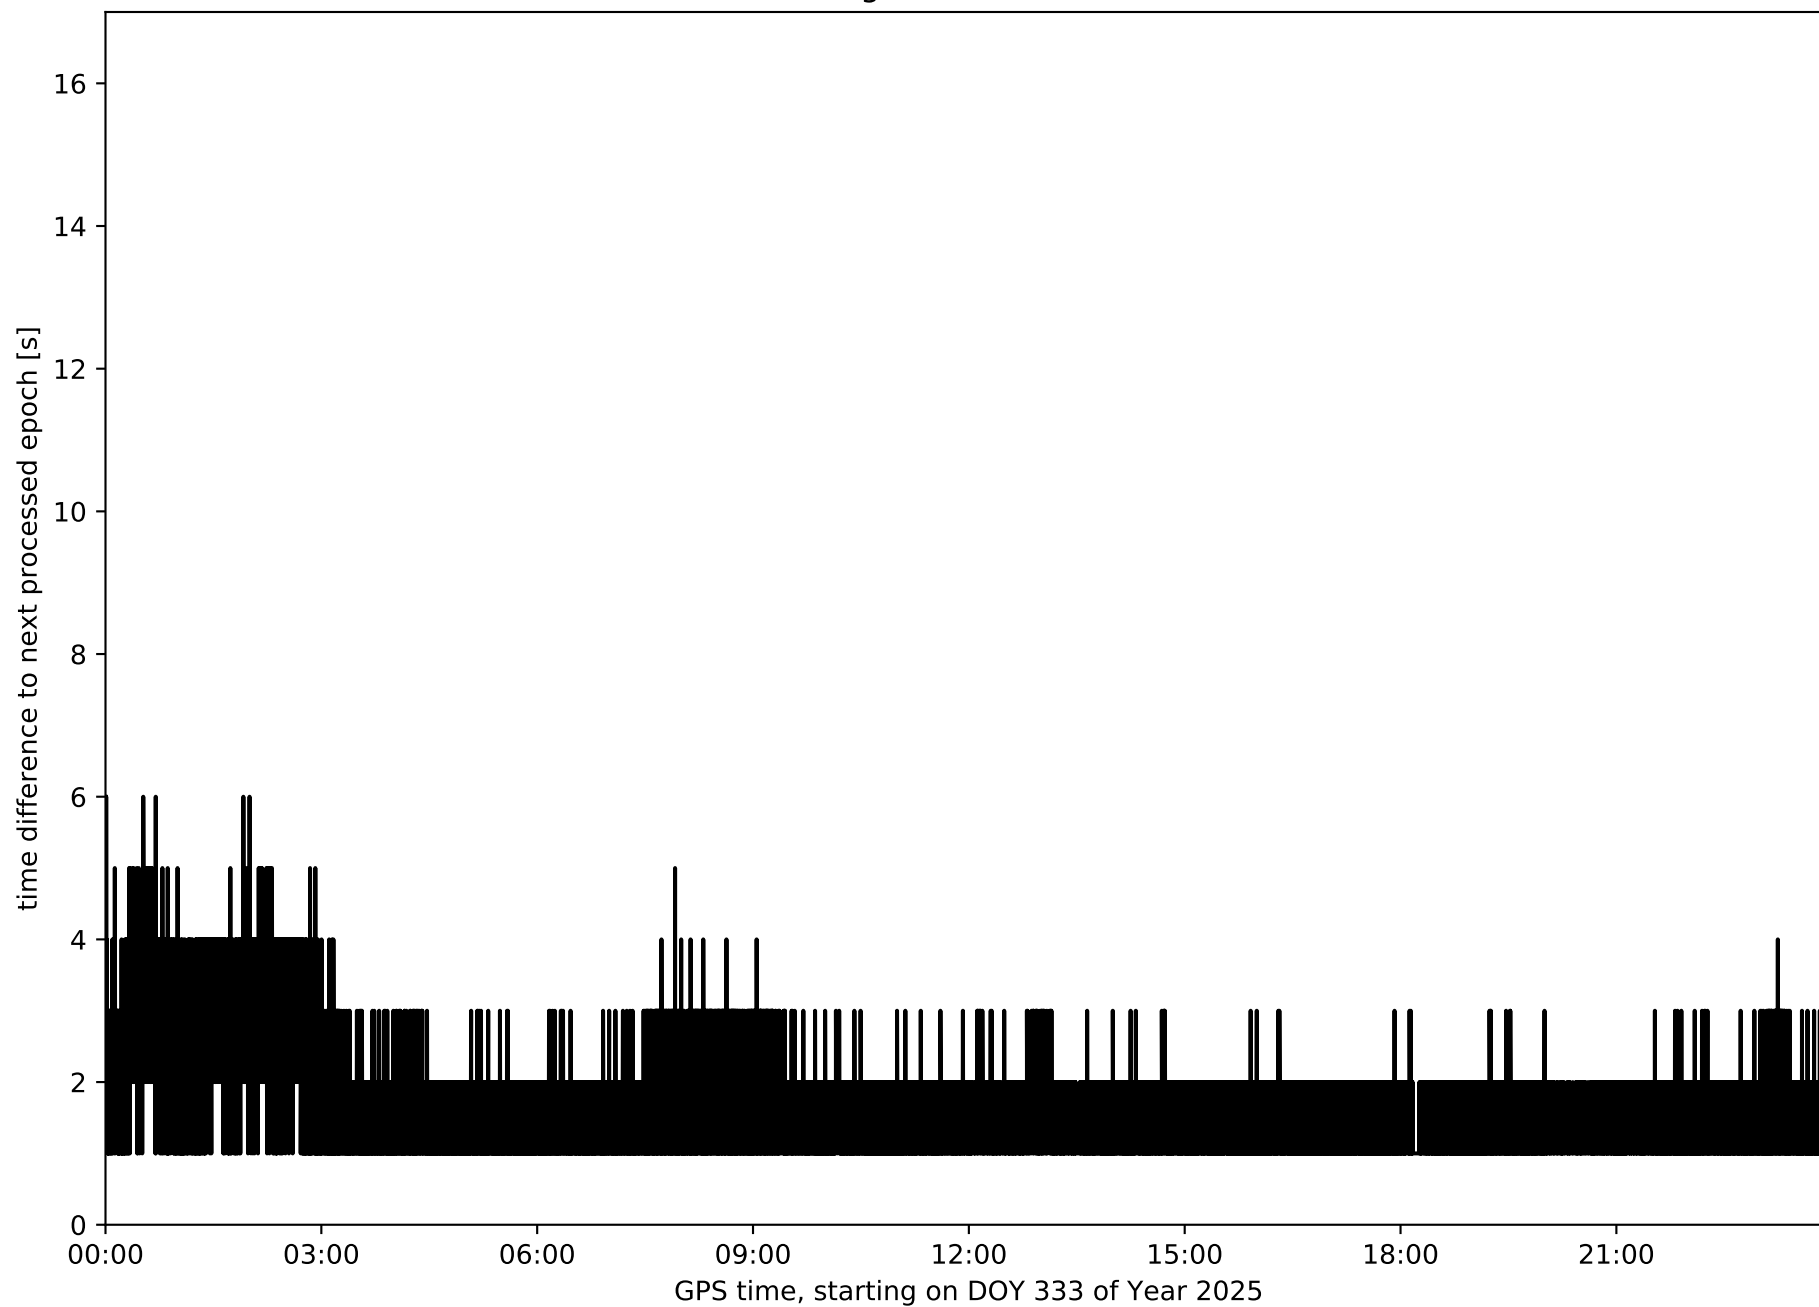


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

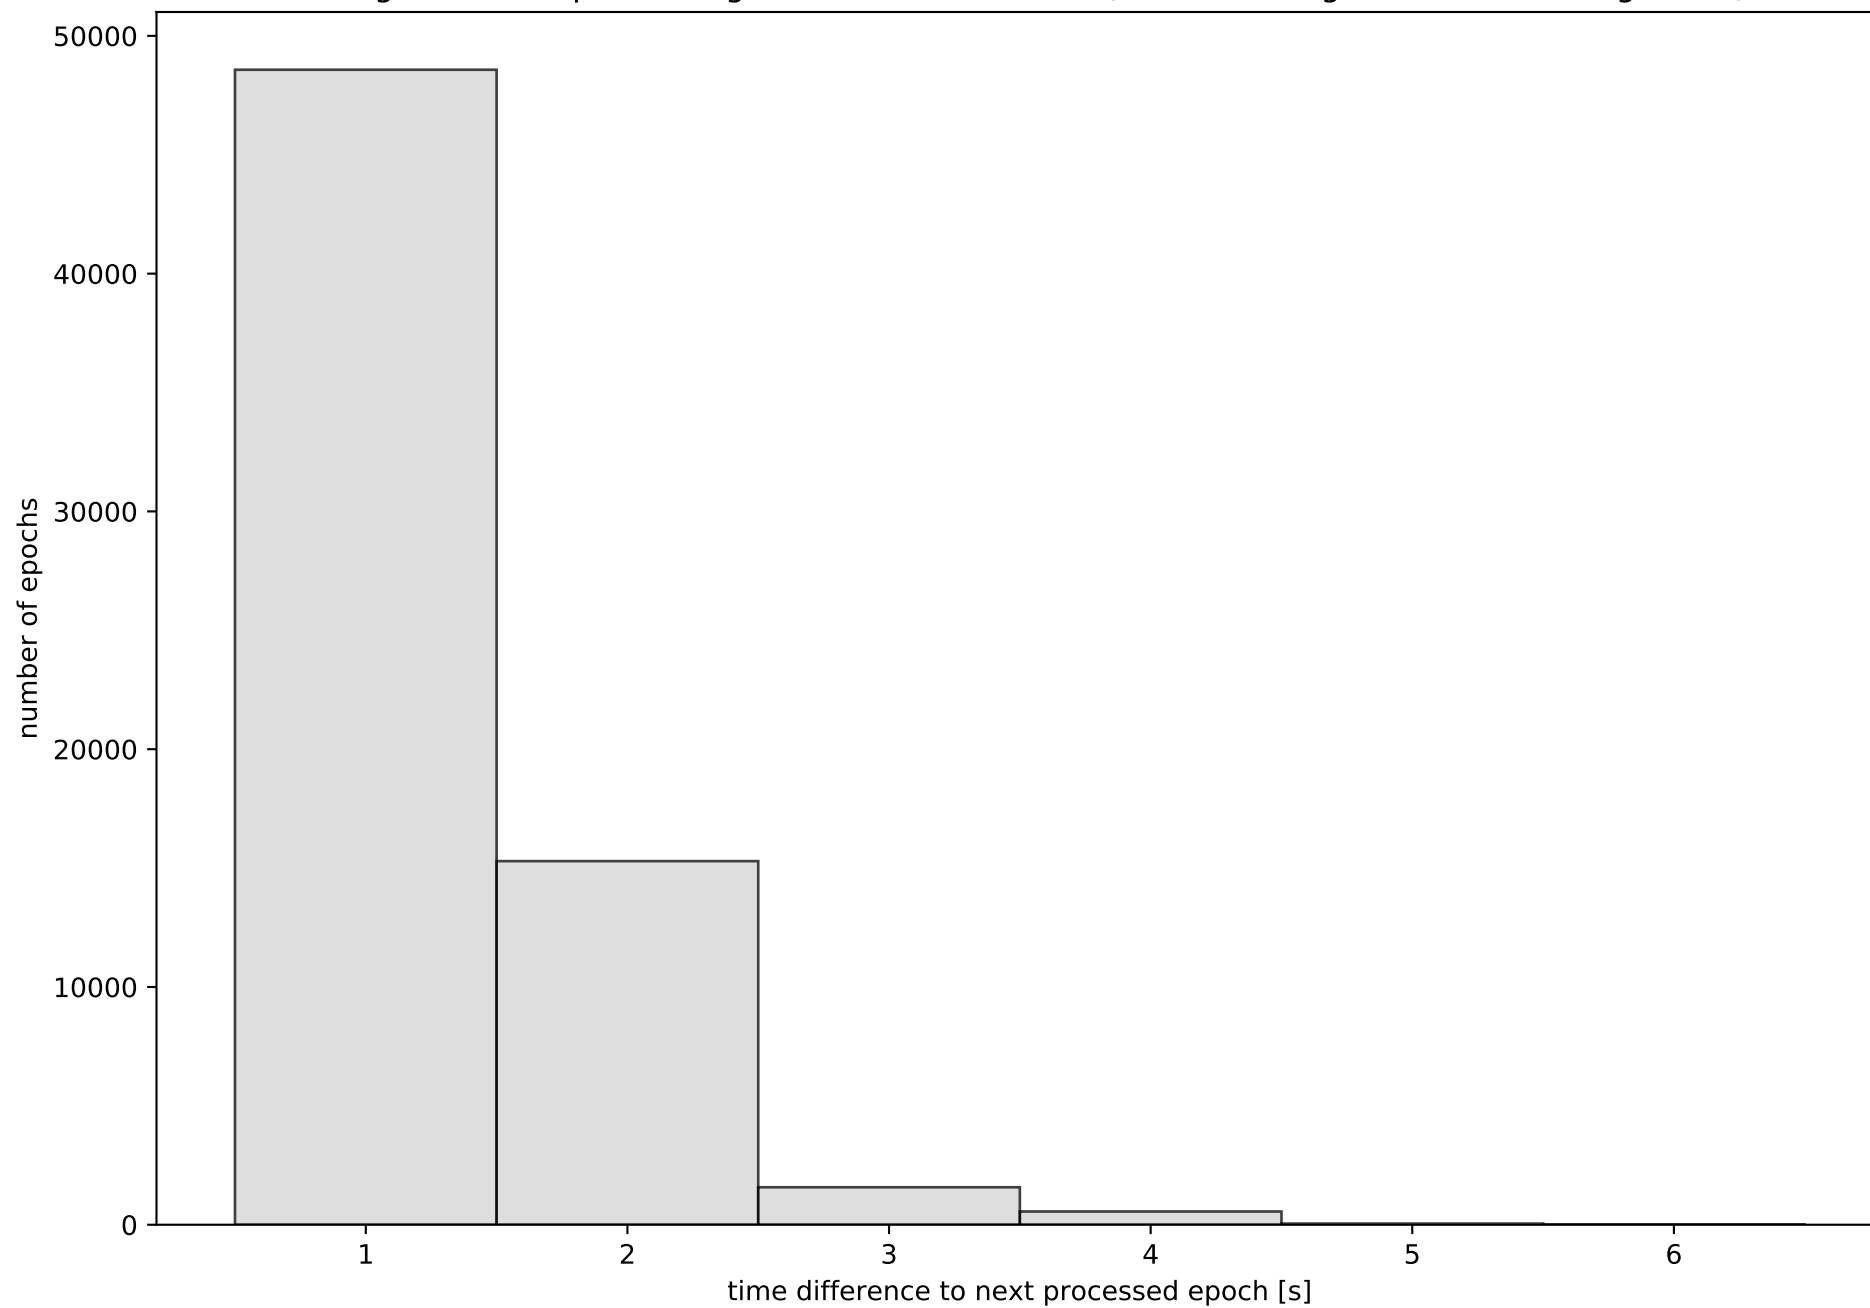


Network N32T with threshold set to 0.3

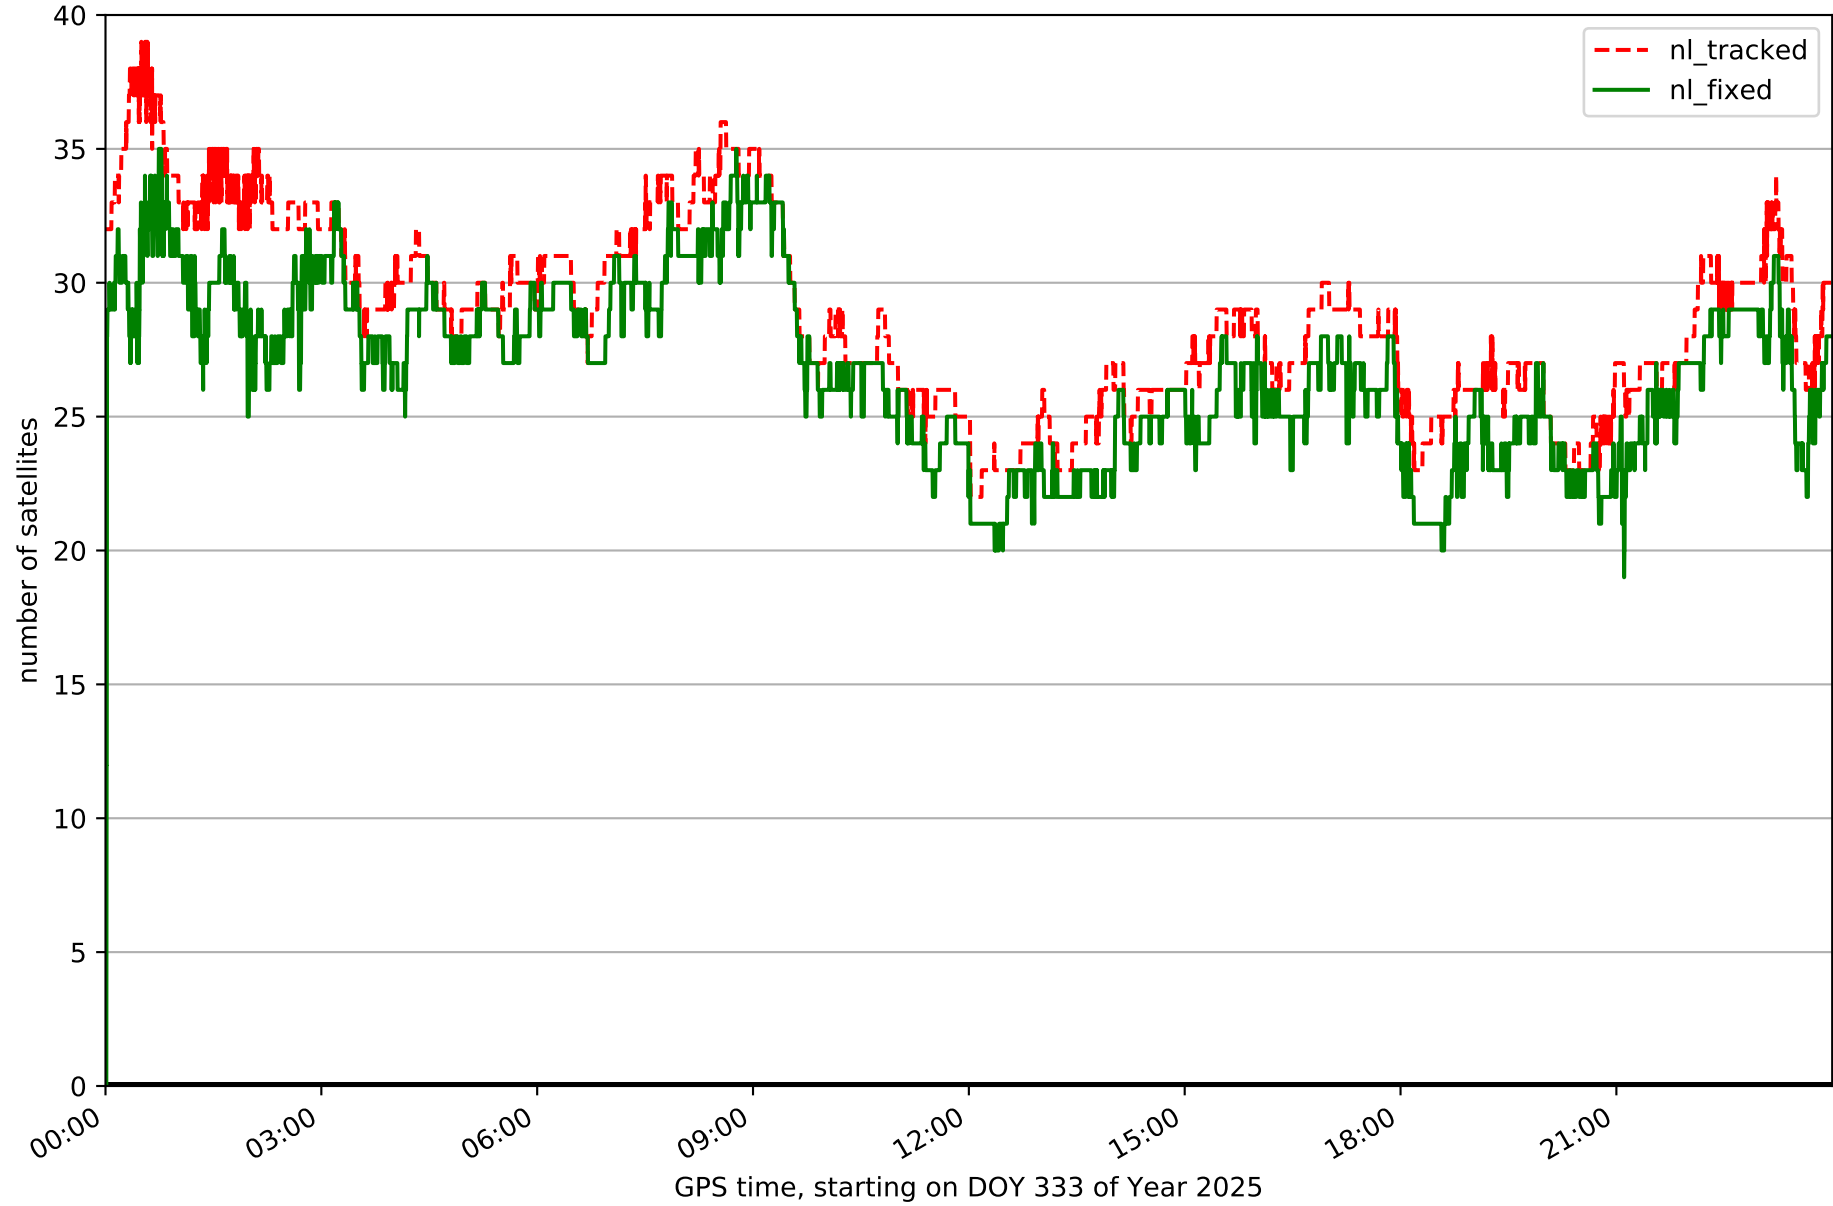


Fixing percentage of satellites in network N32T with threshold set to 0.3

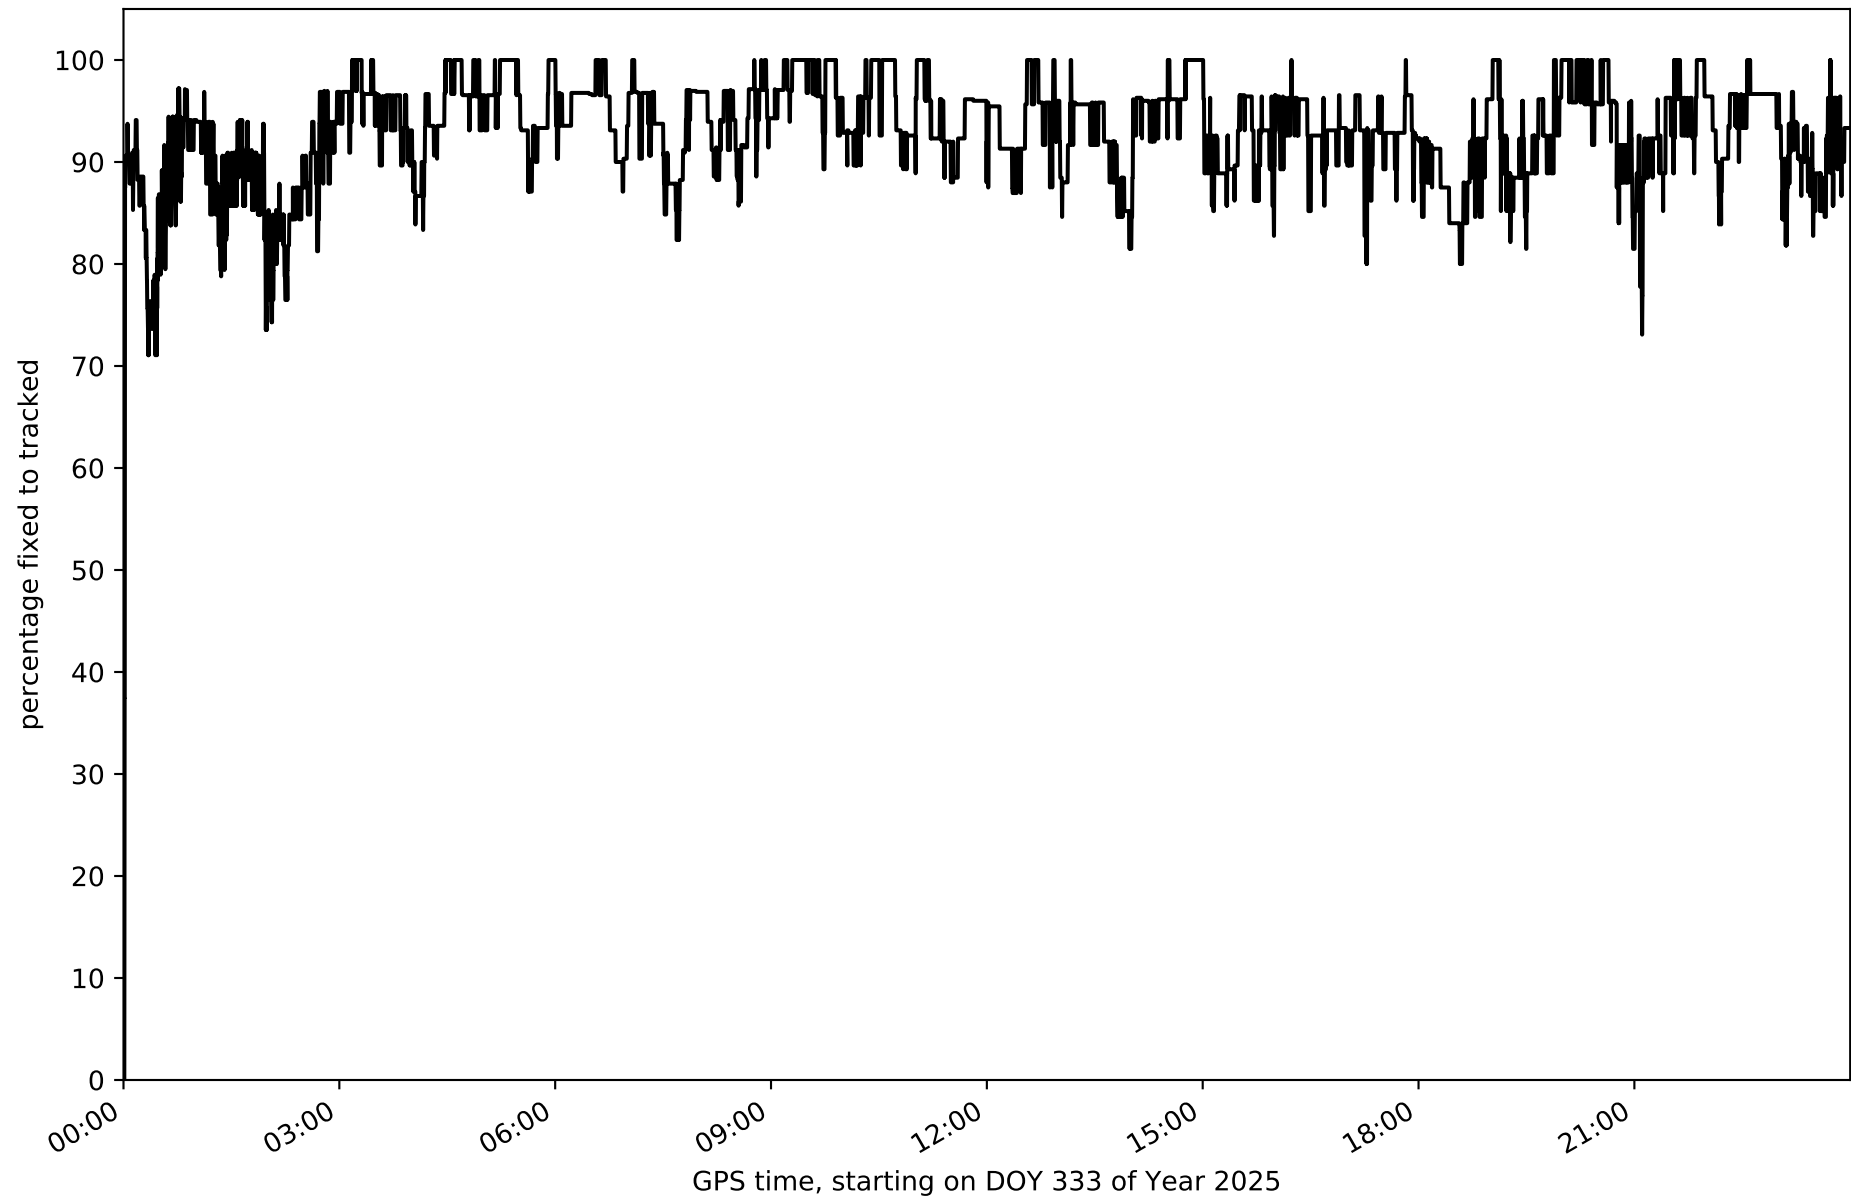


Network N32T - only GPS with threshold set to 0.3

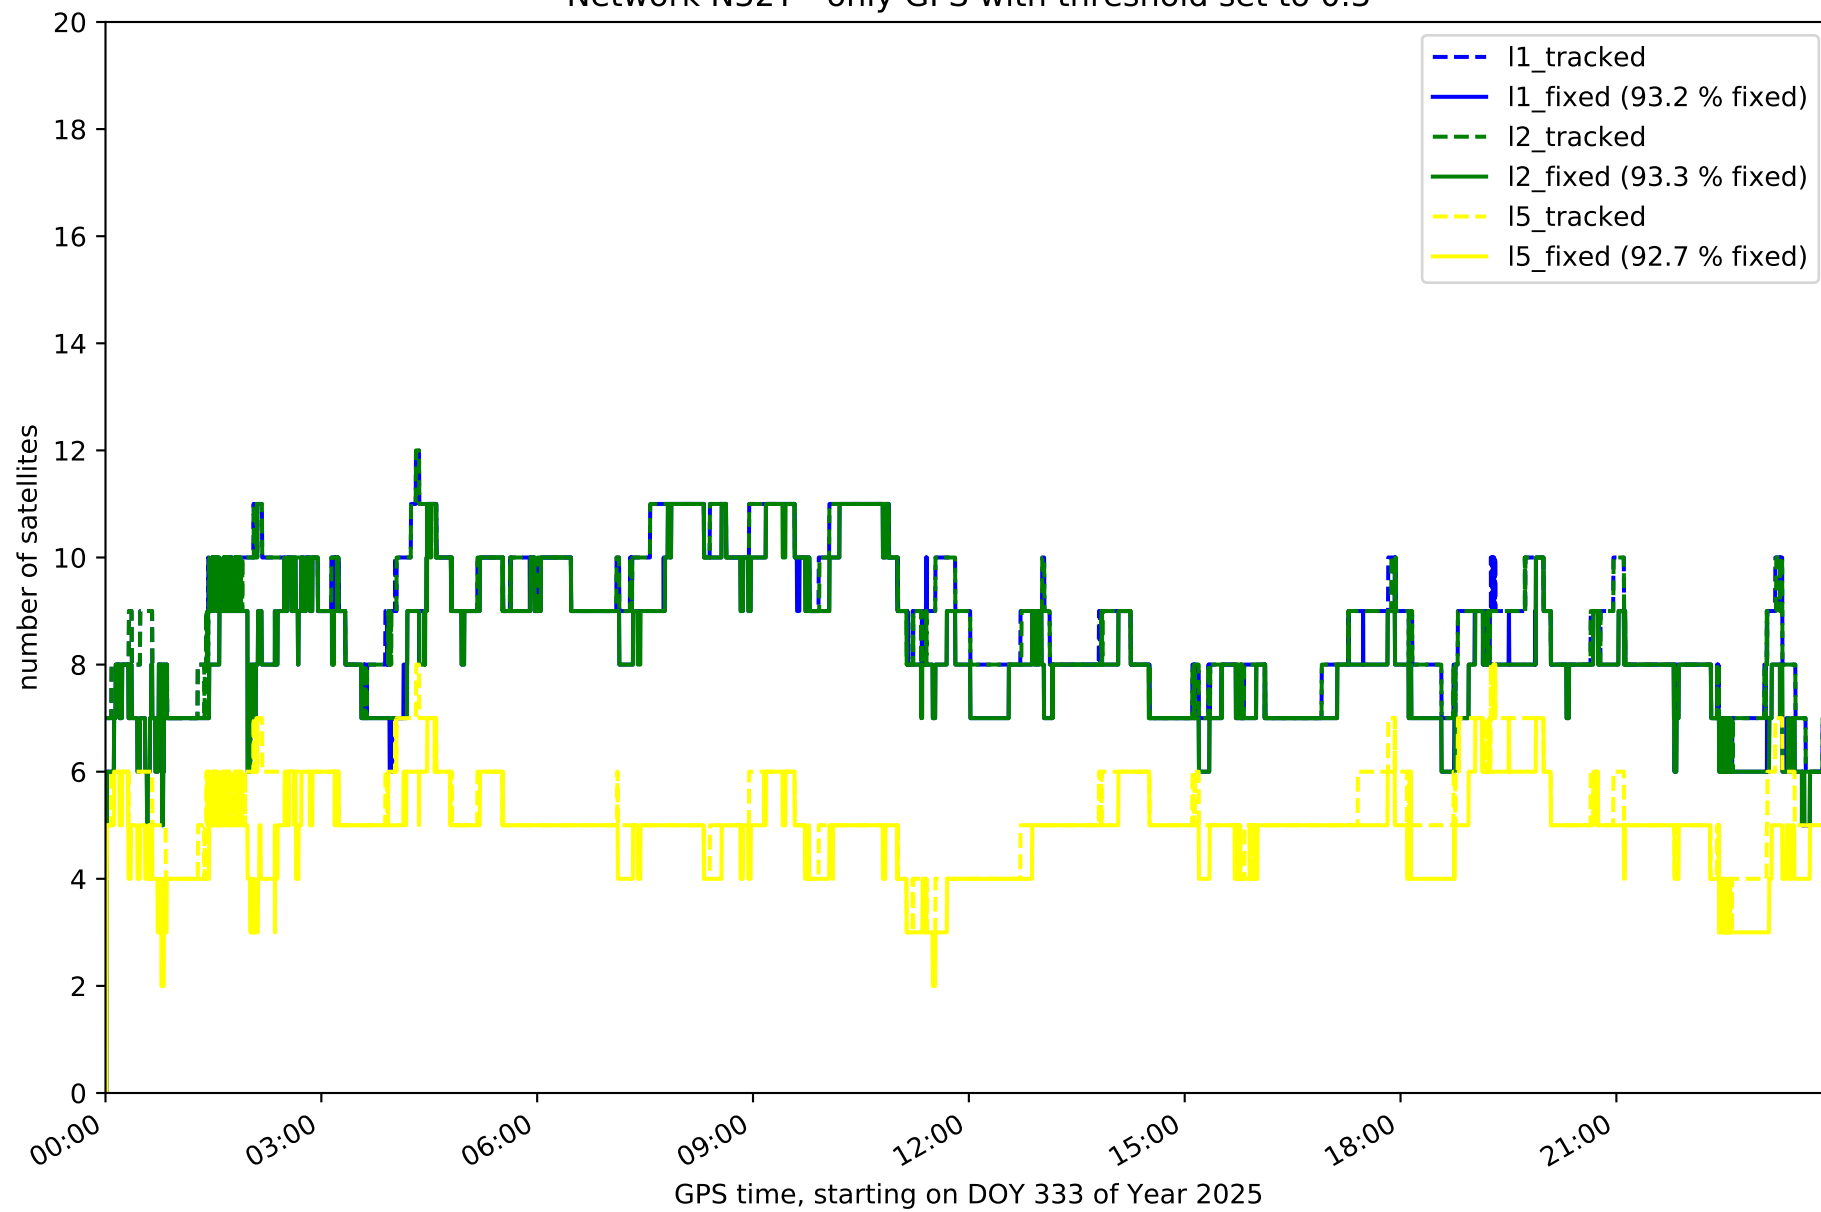


Network N32T - only GLONASS with threshold set to 0.3

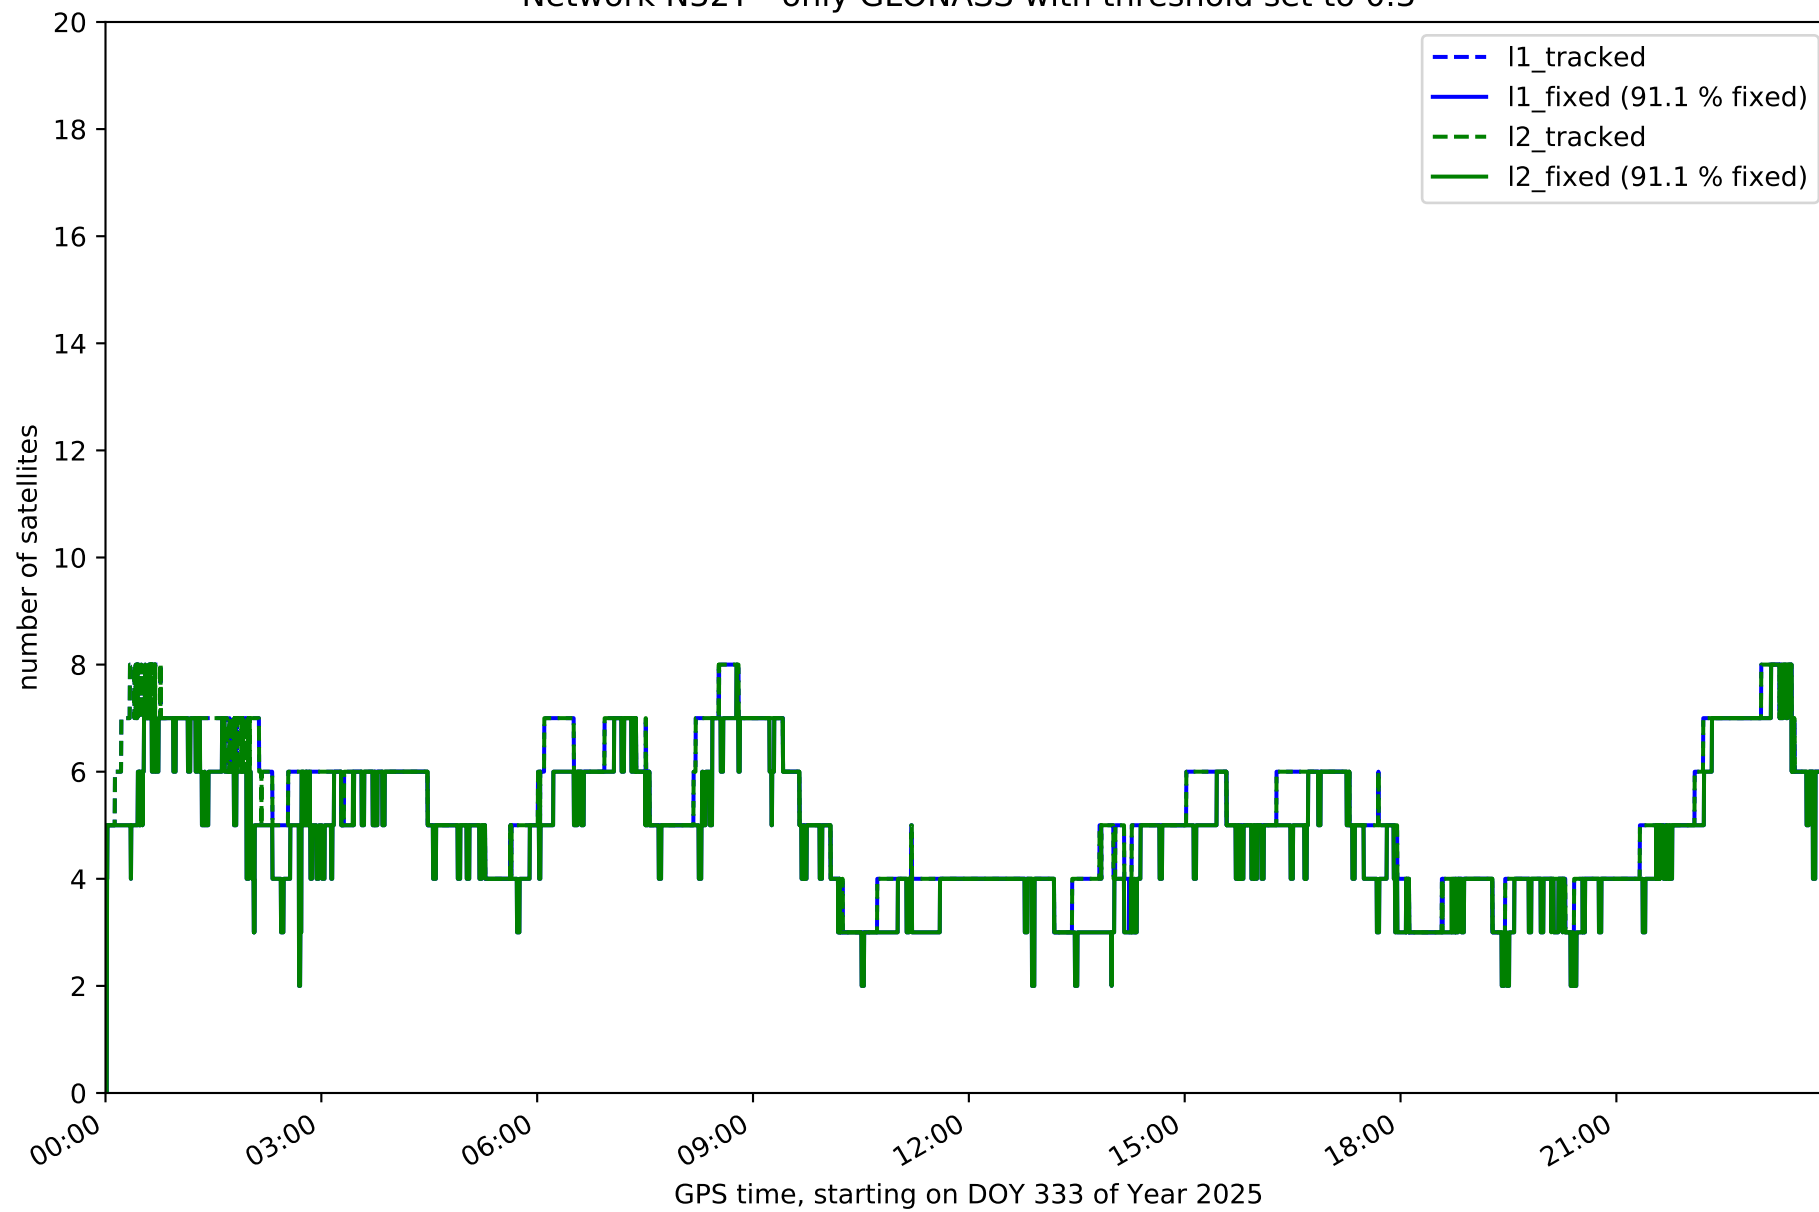


Network N32T - only BDS with threshold set to 0.3

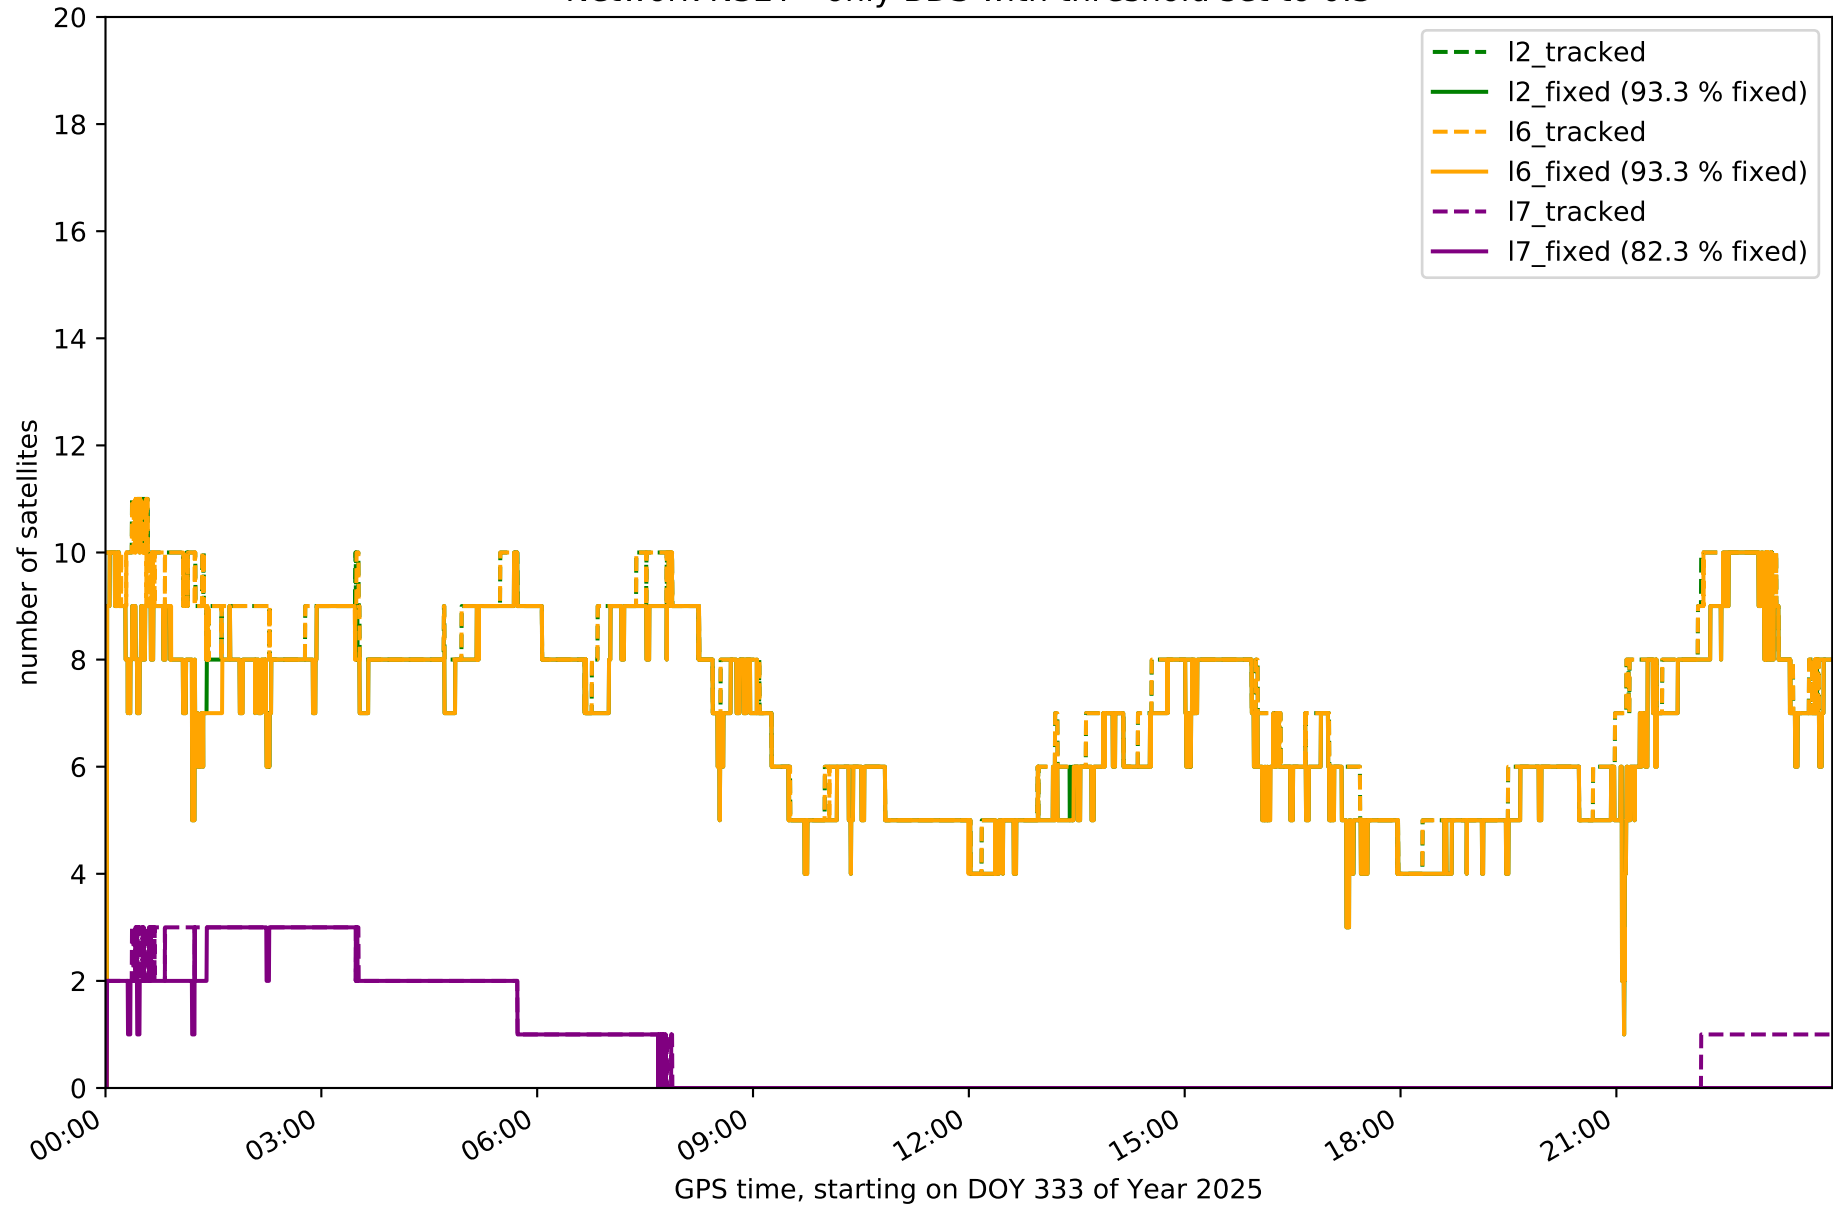


Network N32T - only Galileo with threshold set to 0.3

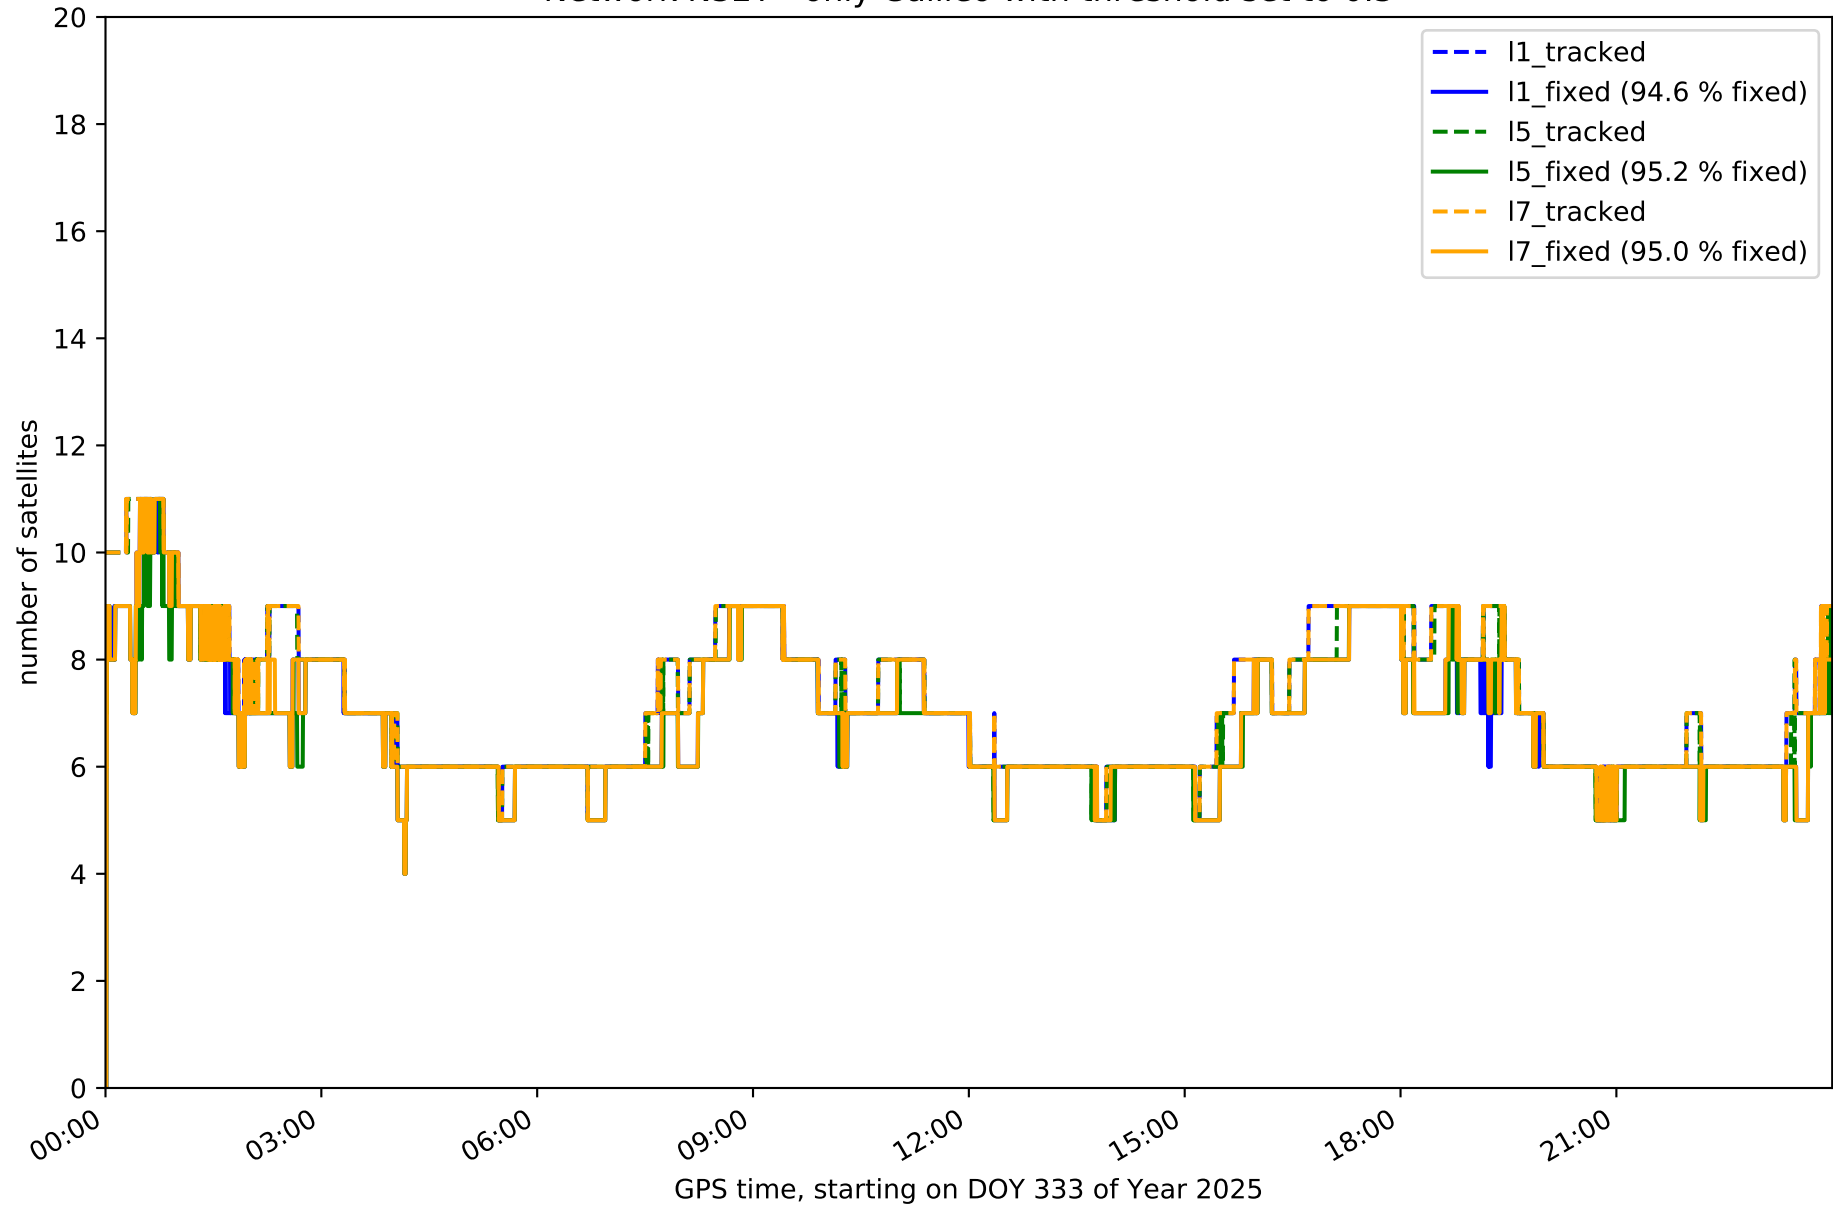


Station EH01 in network N32T

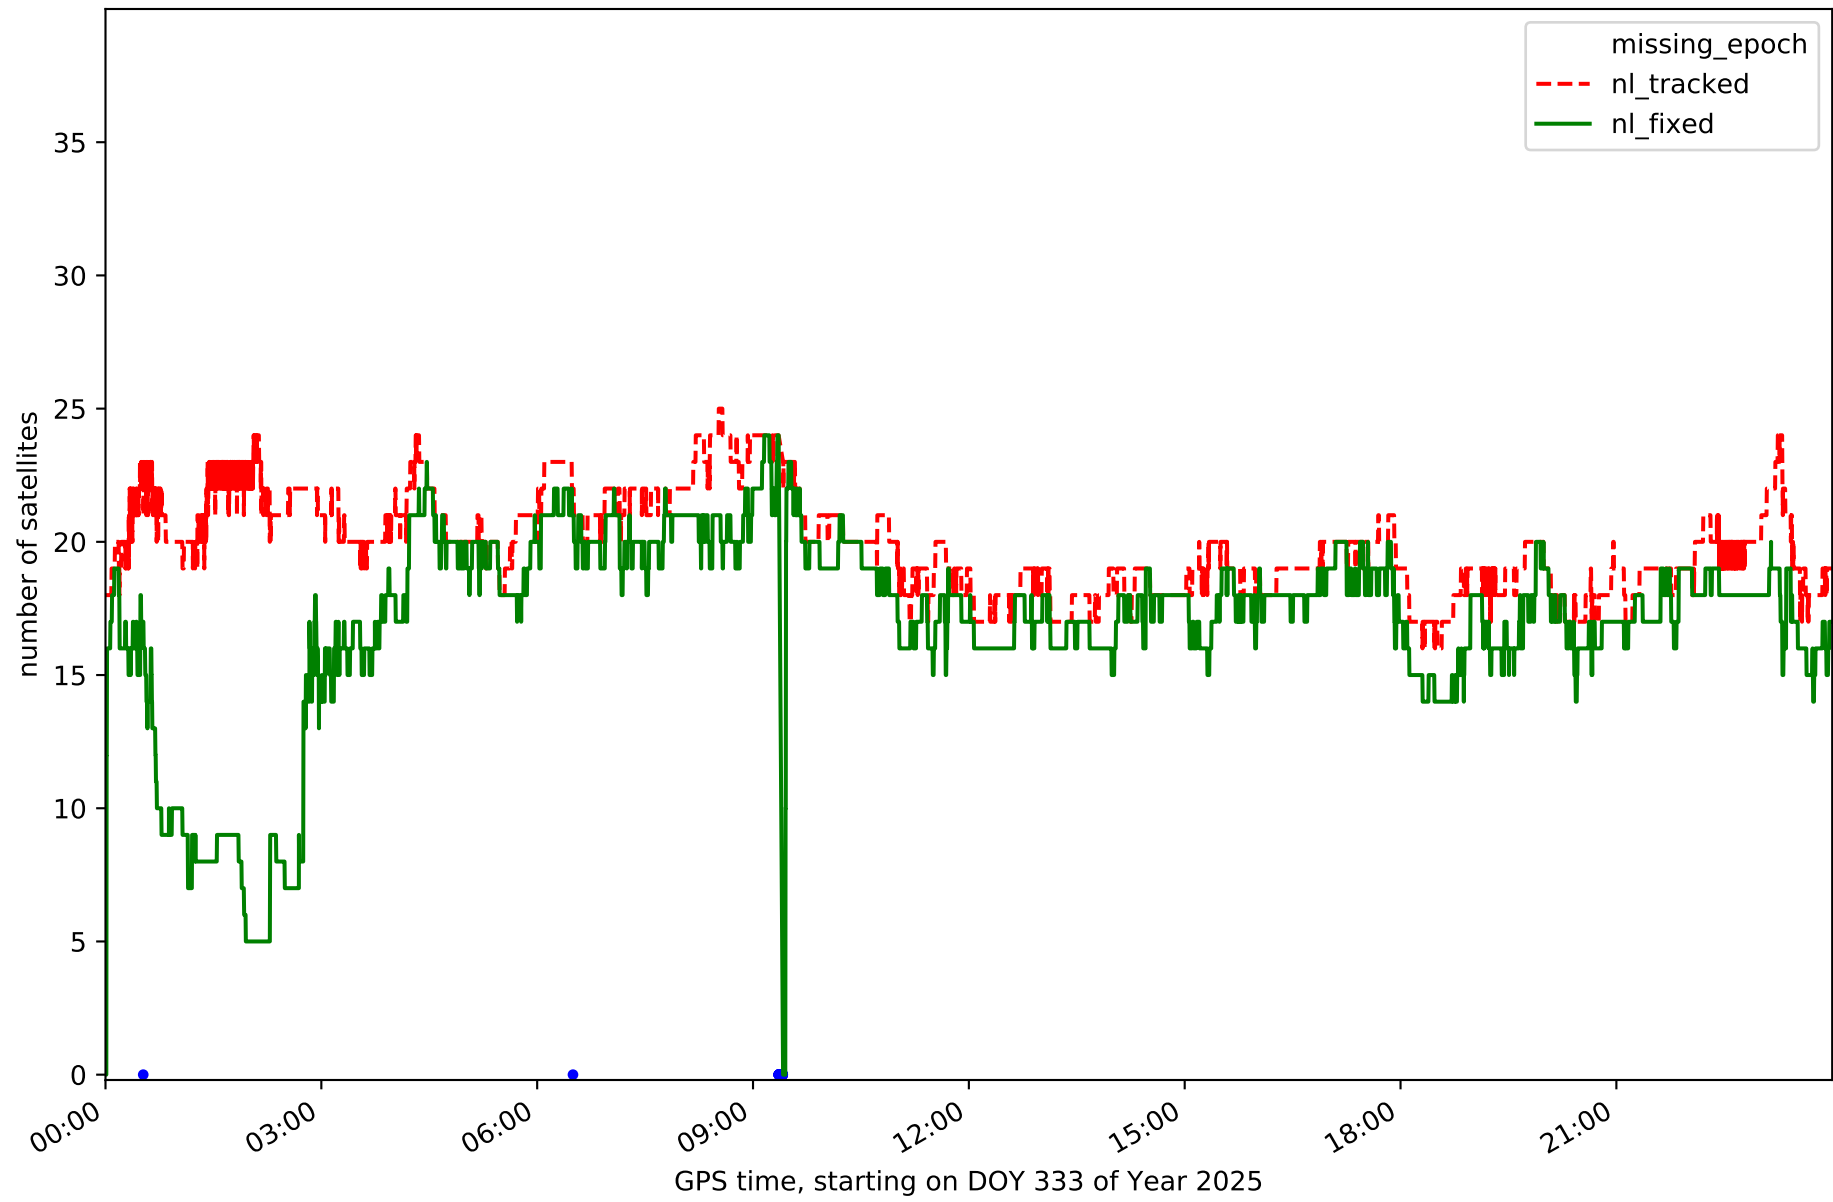


Station EH02 in network N32T

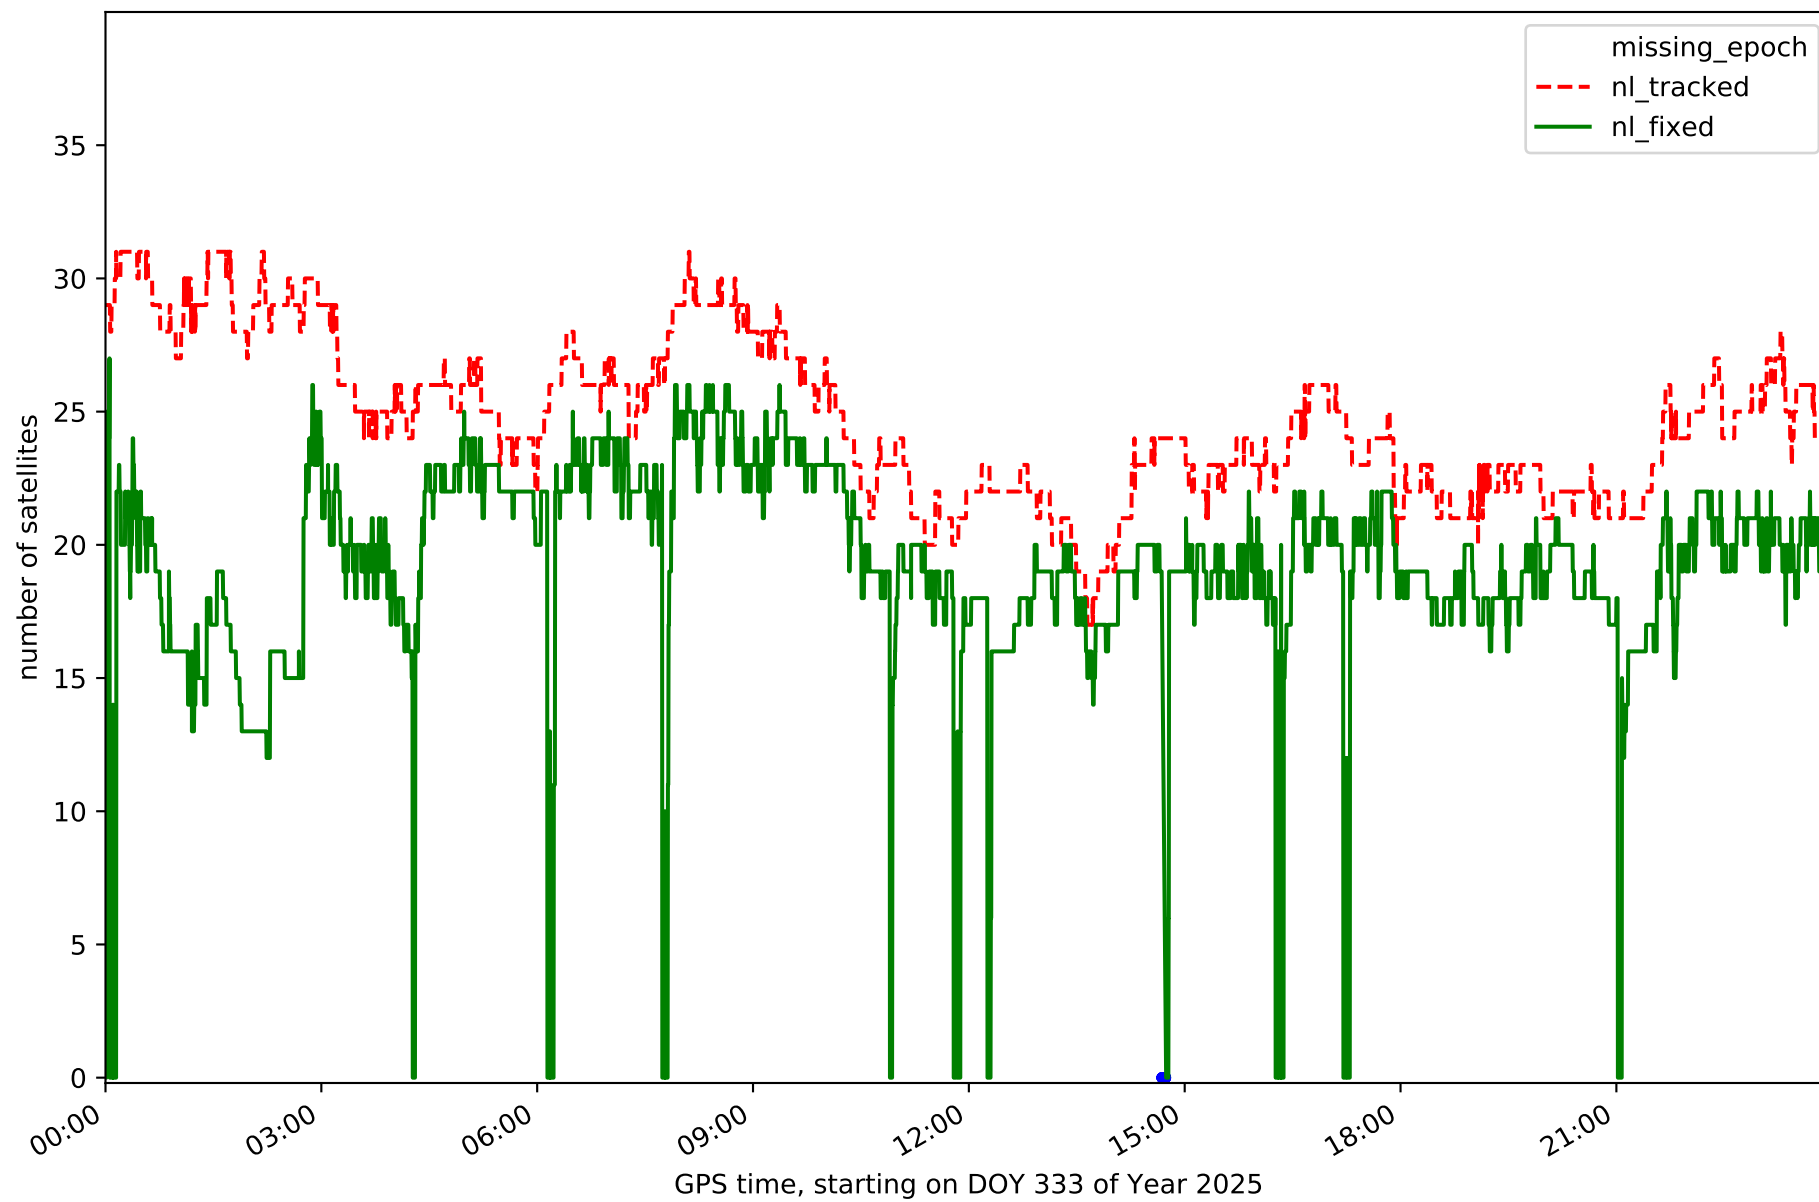


Station GOM1 in network N32T

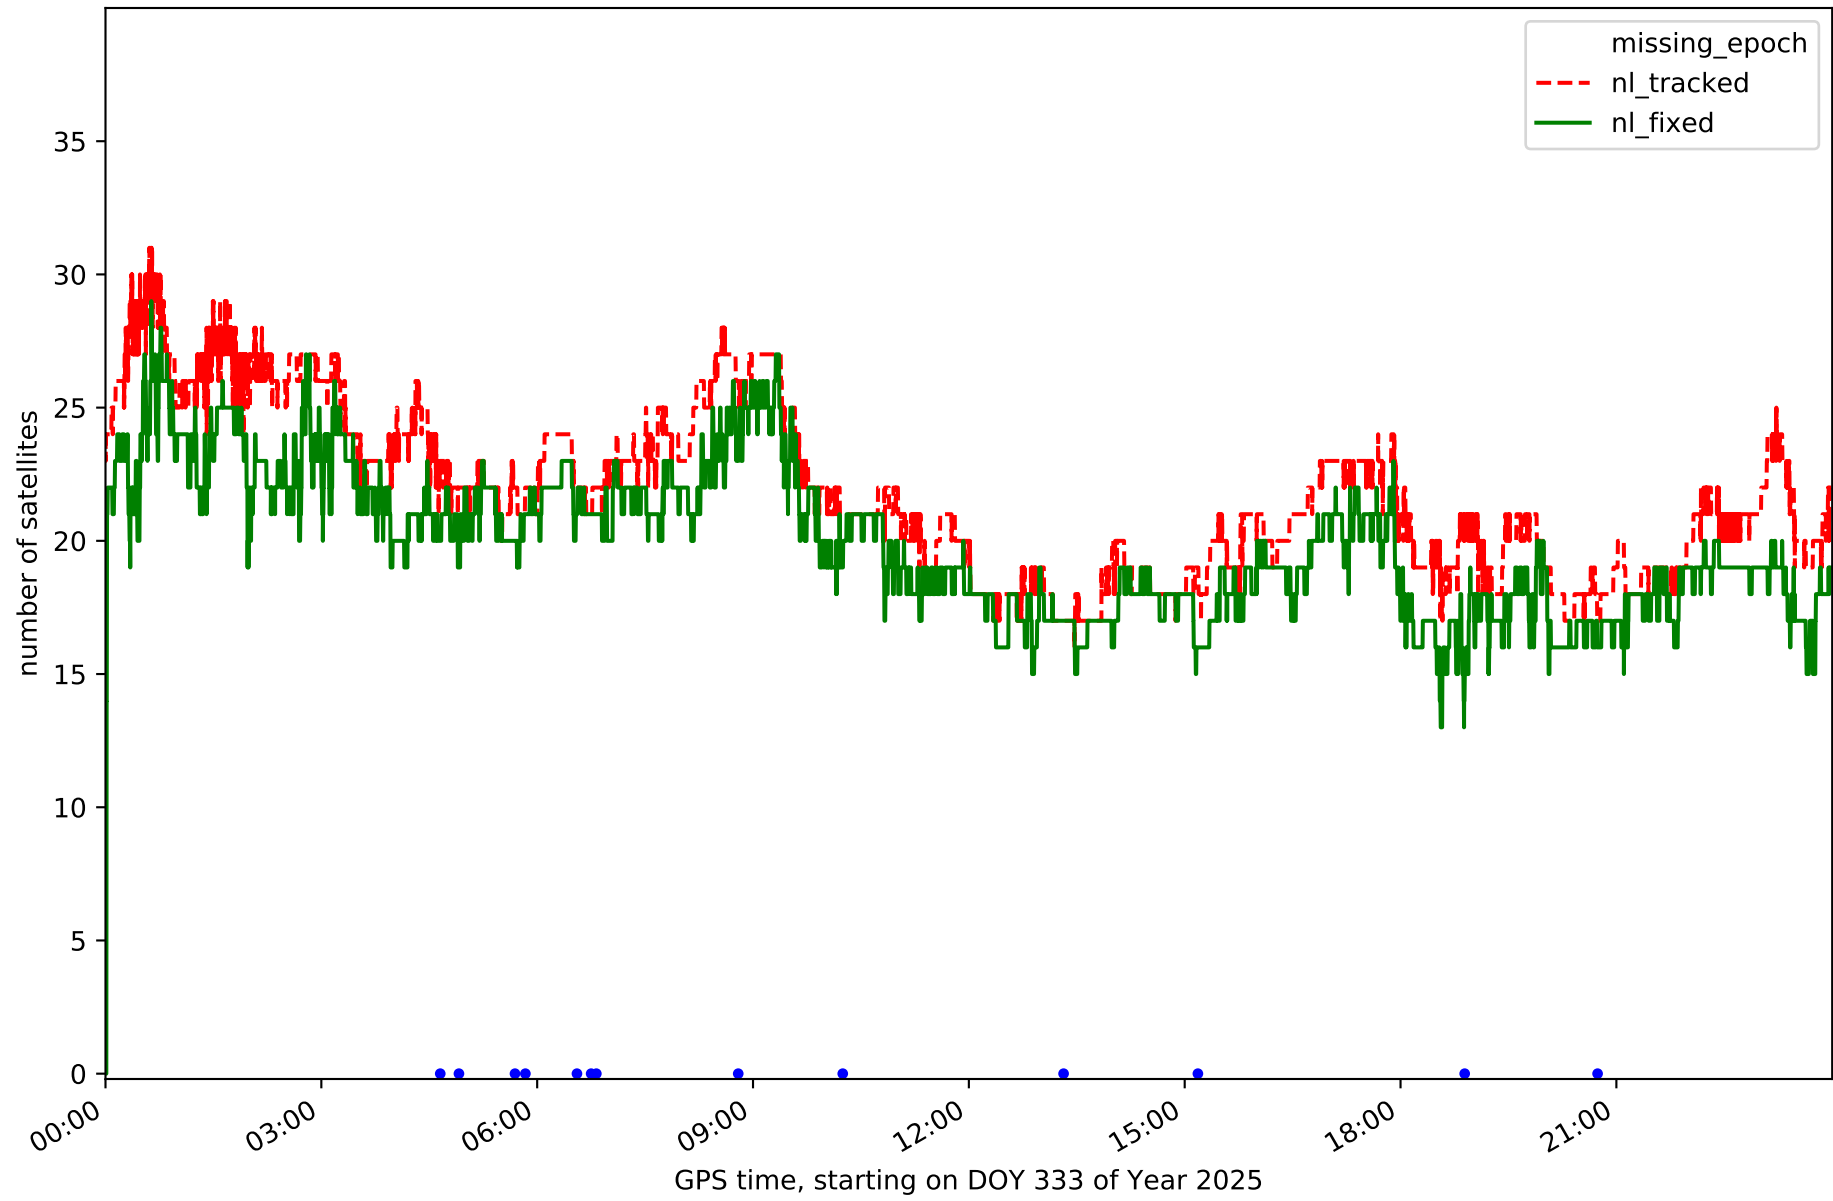


Station GOME in network N32T

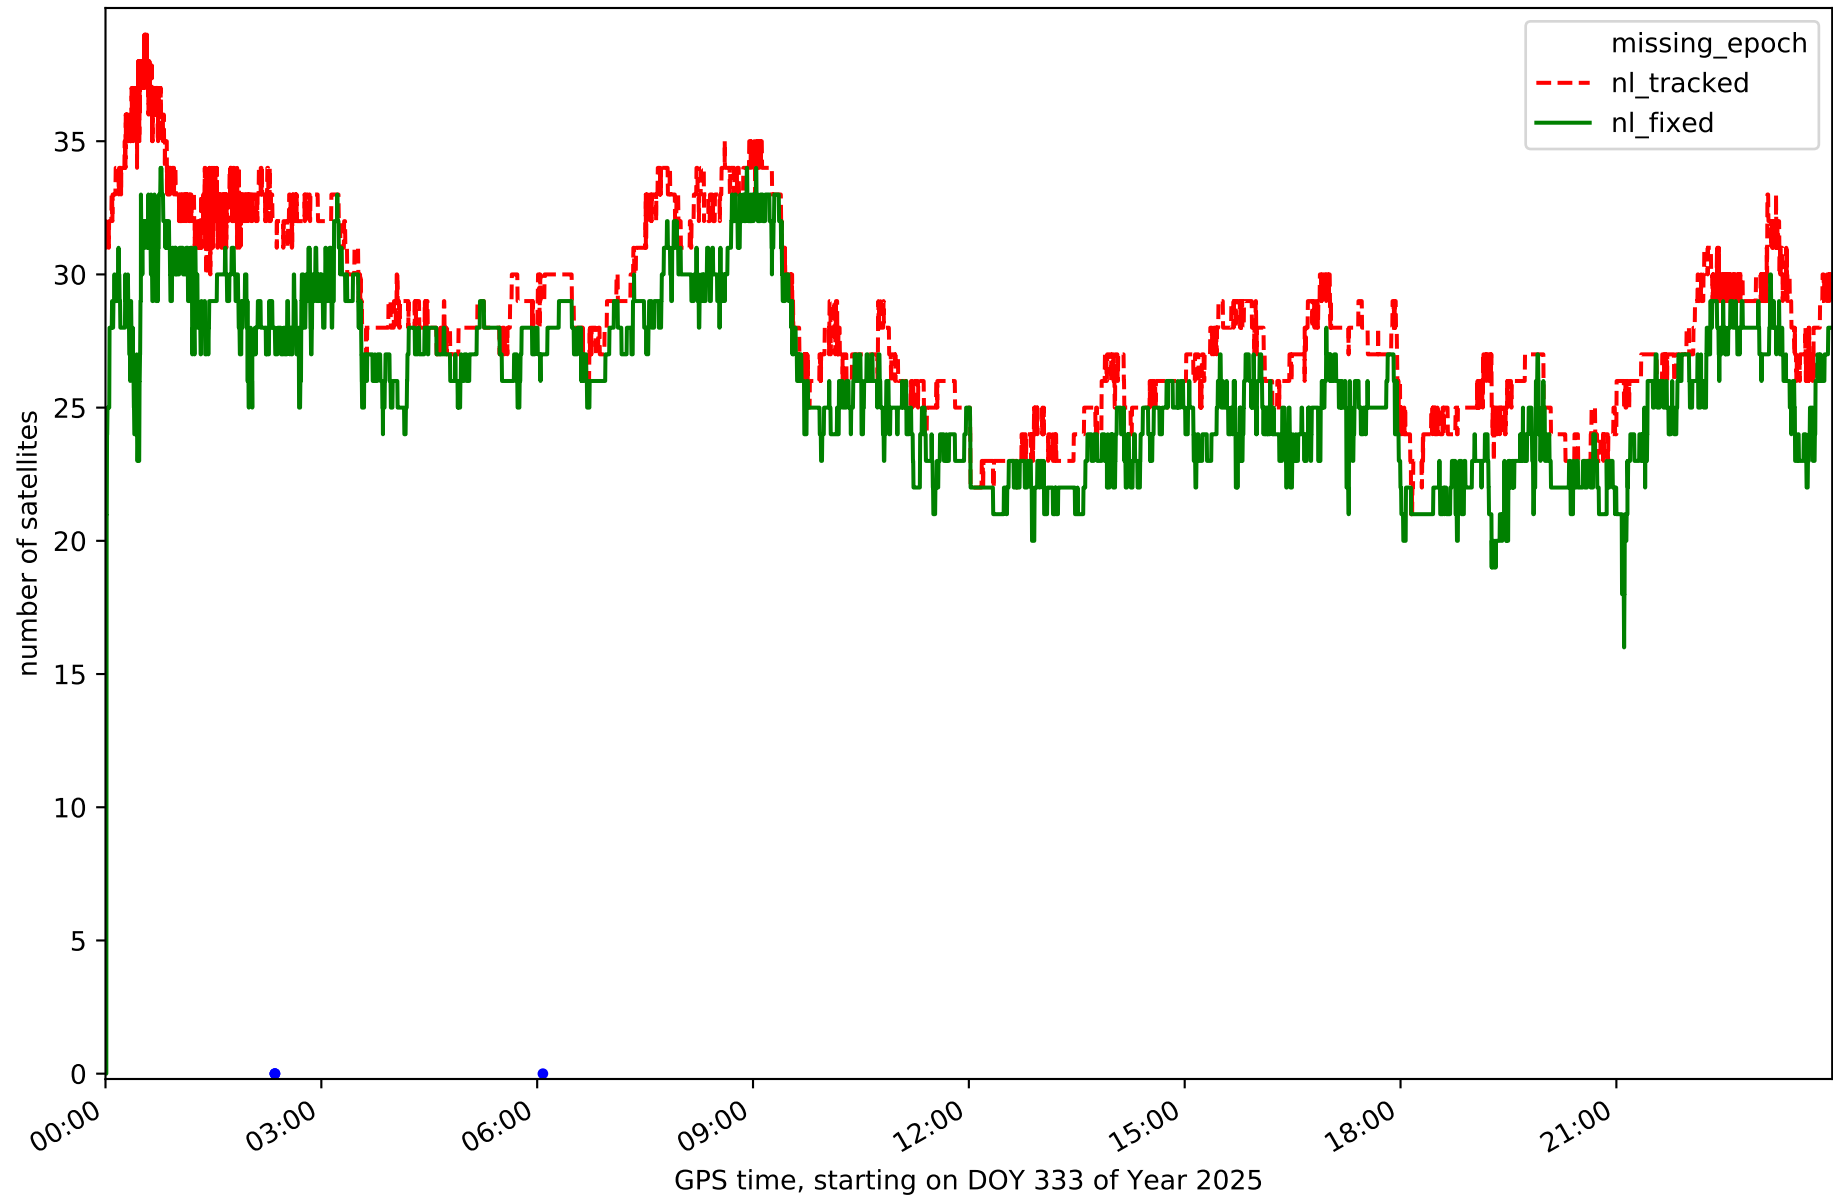


Station IZAN in network N32T

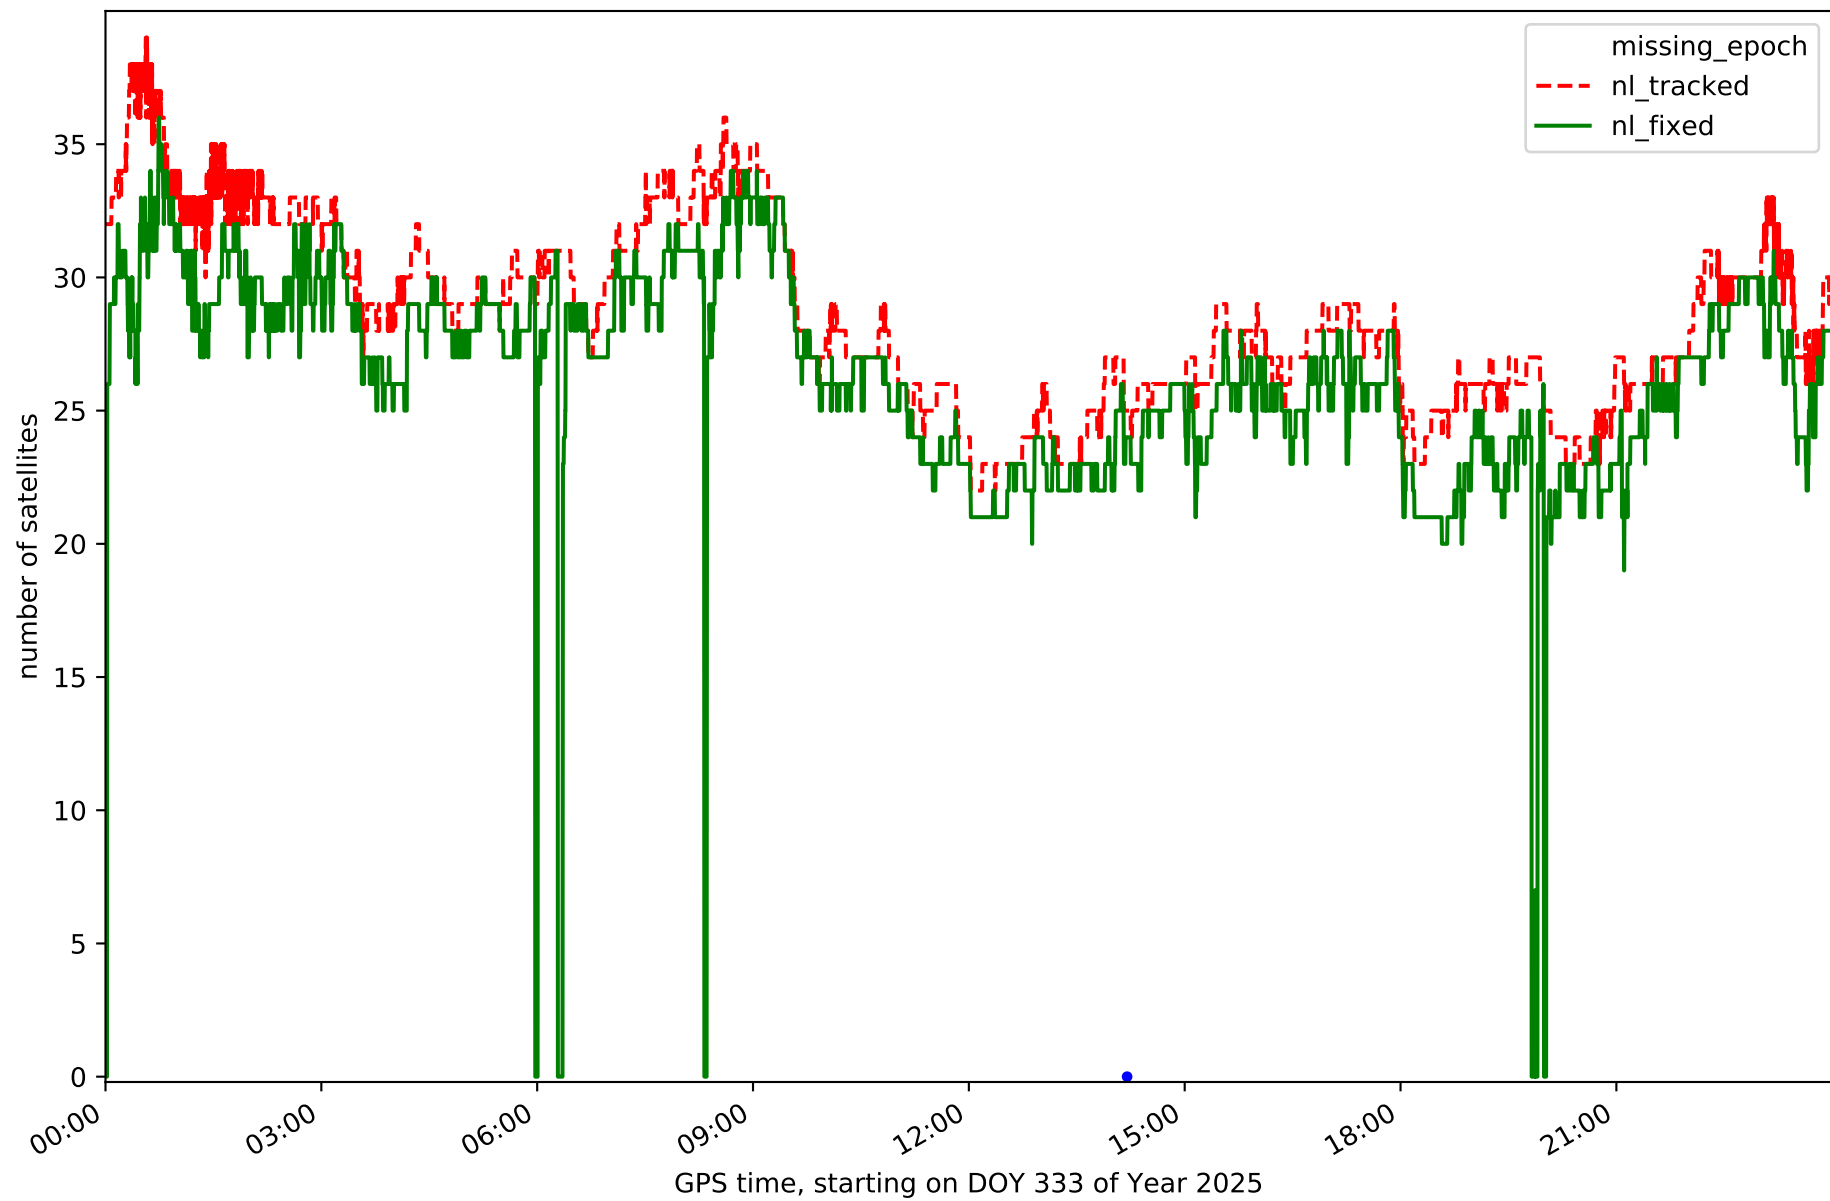


Station LP01 in network N32T

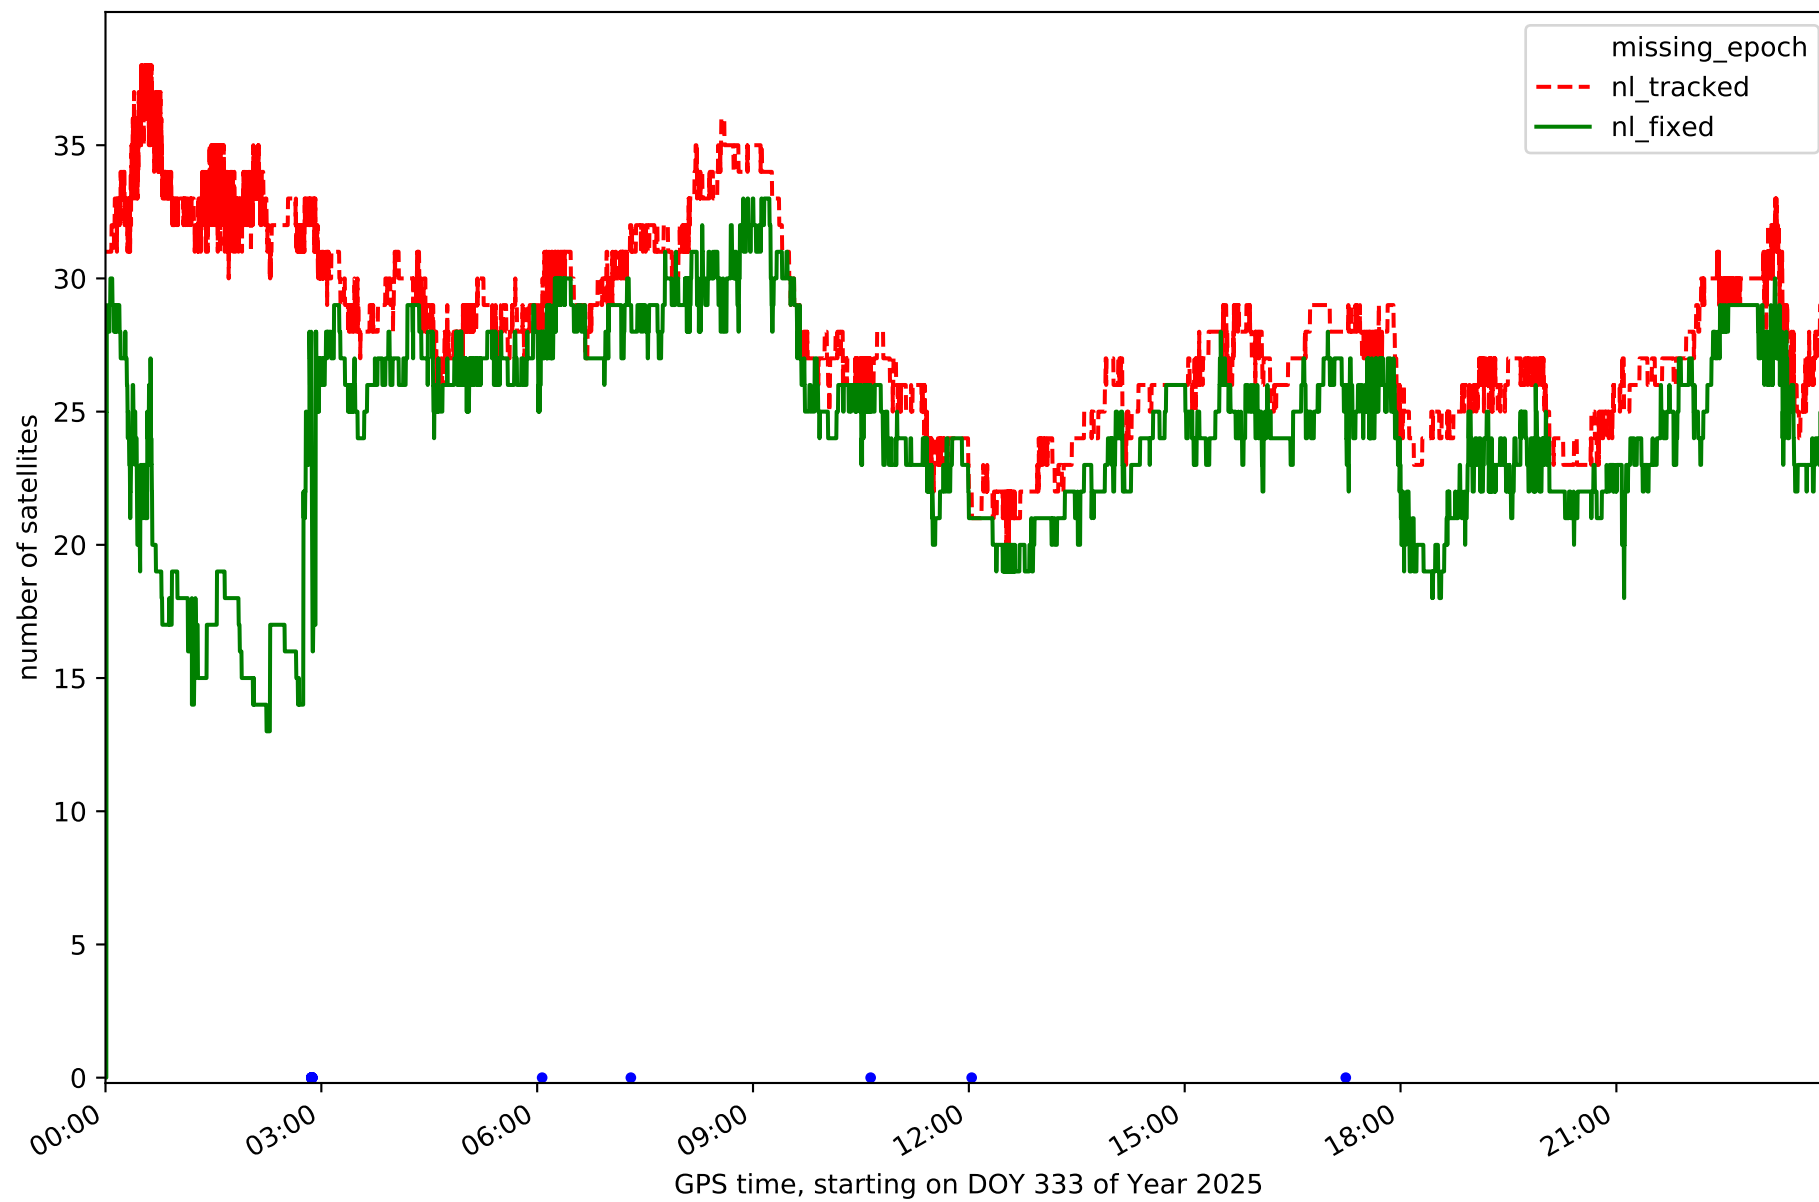


Station LP03 in network N32T

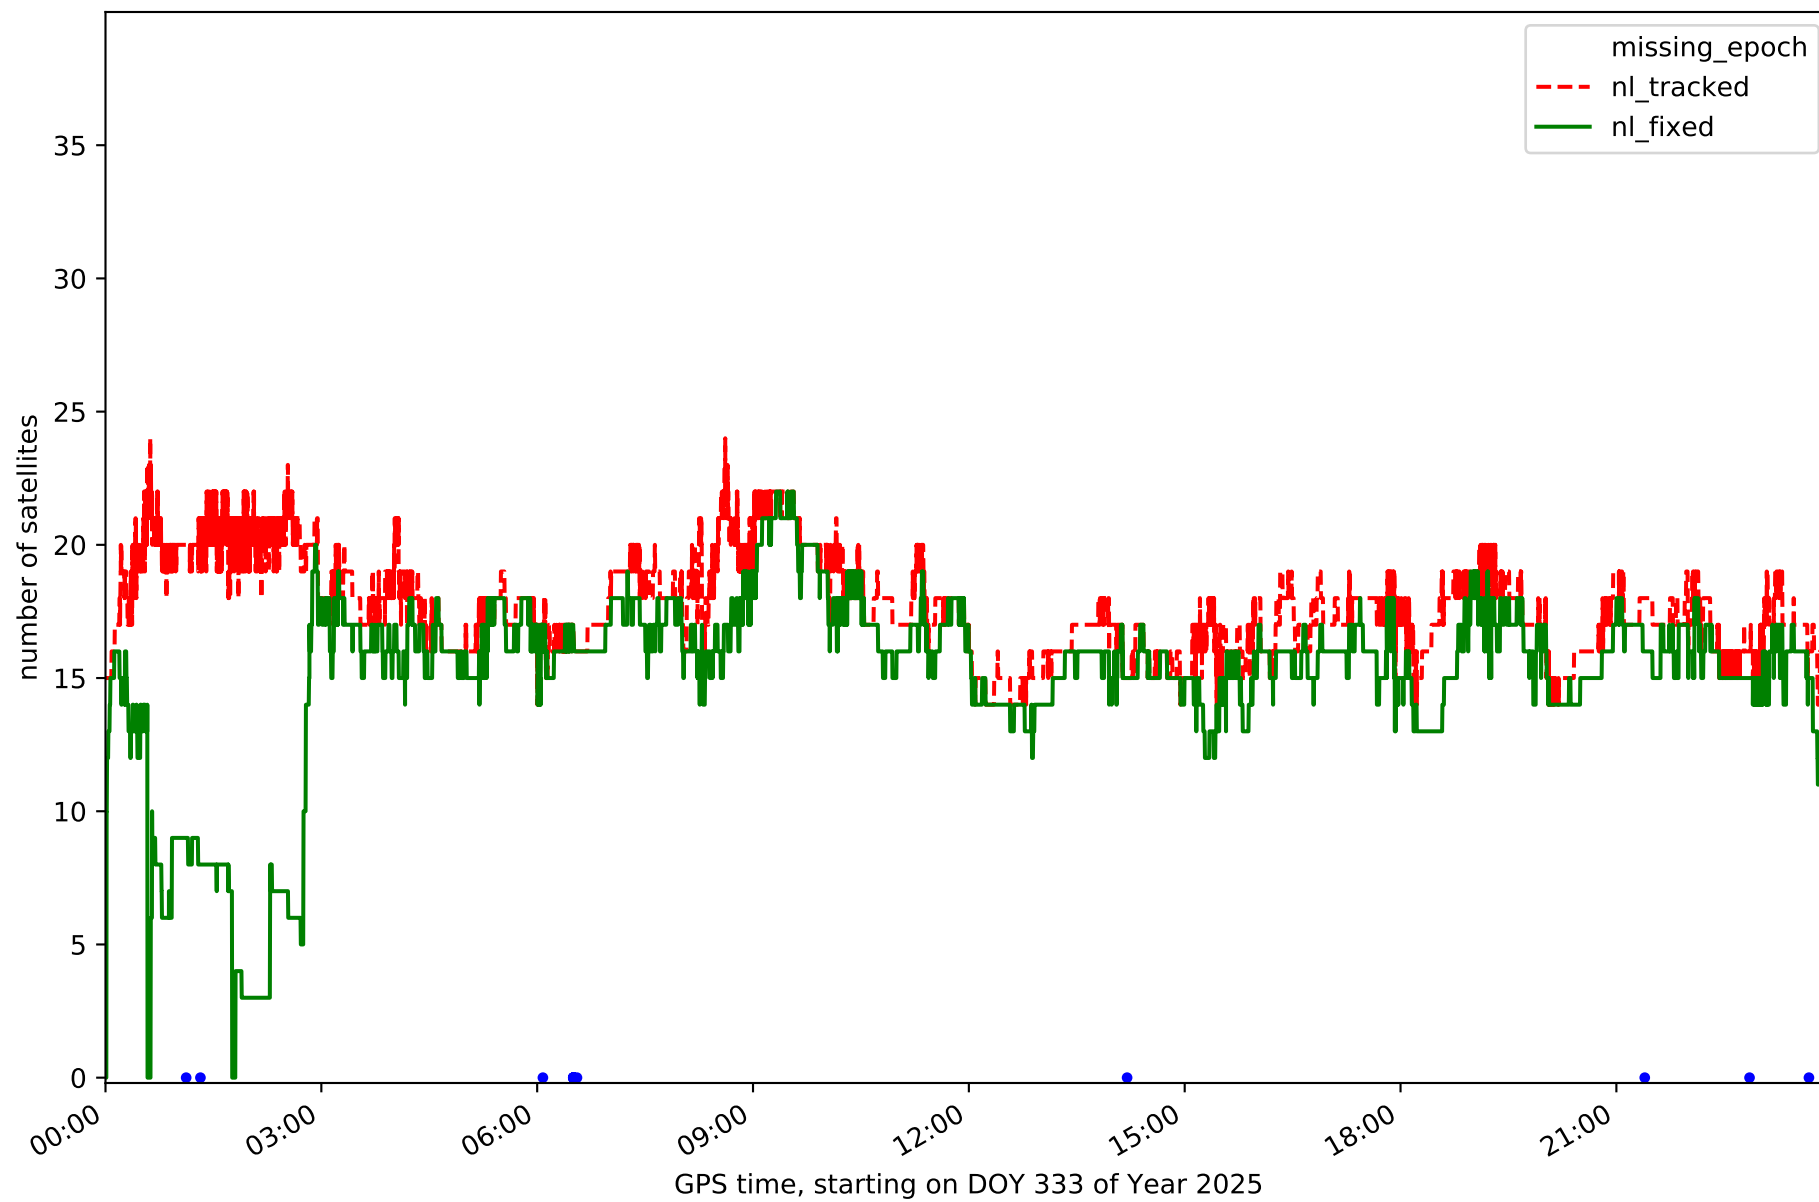


Station LPAL in network N32T

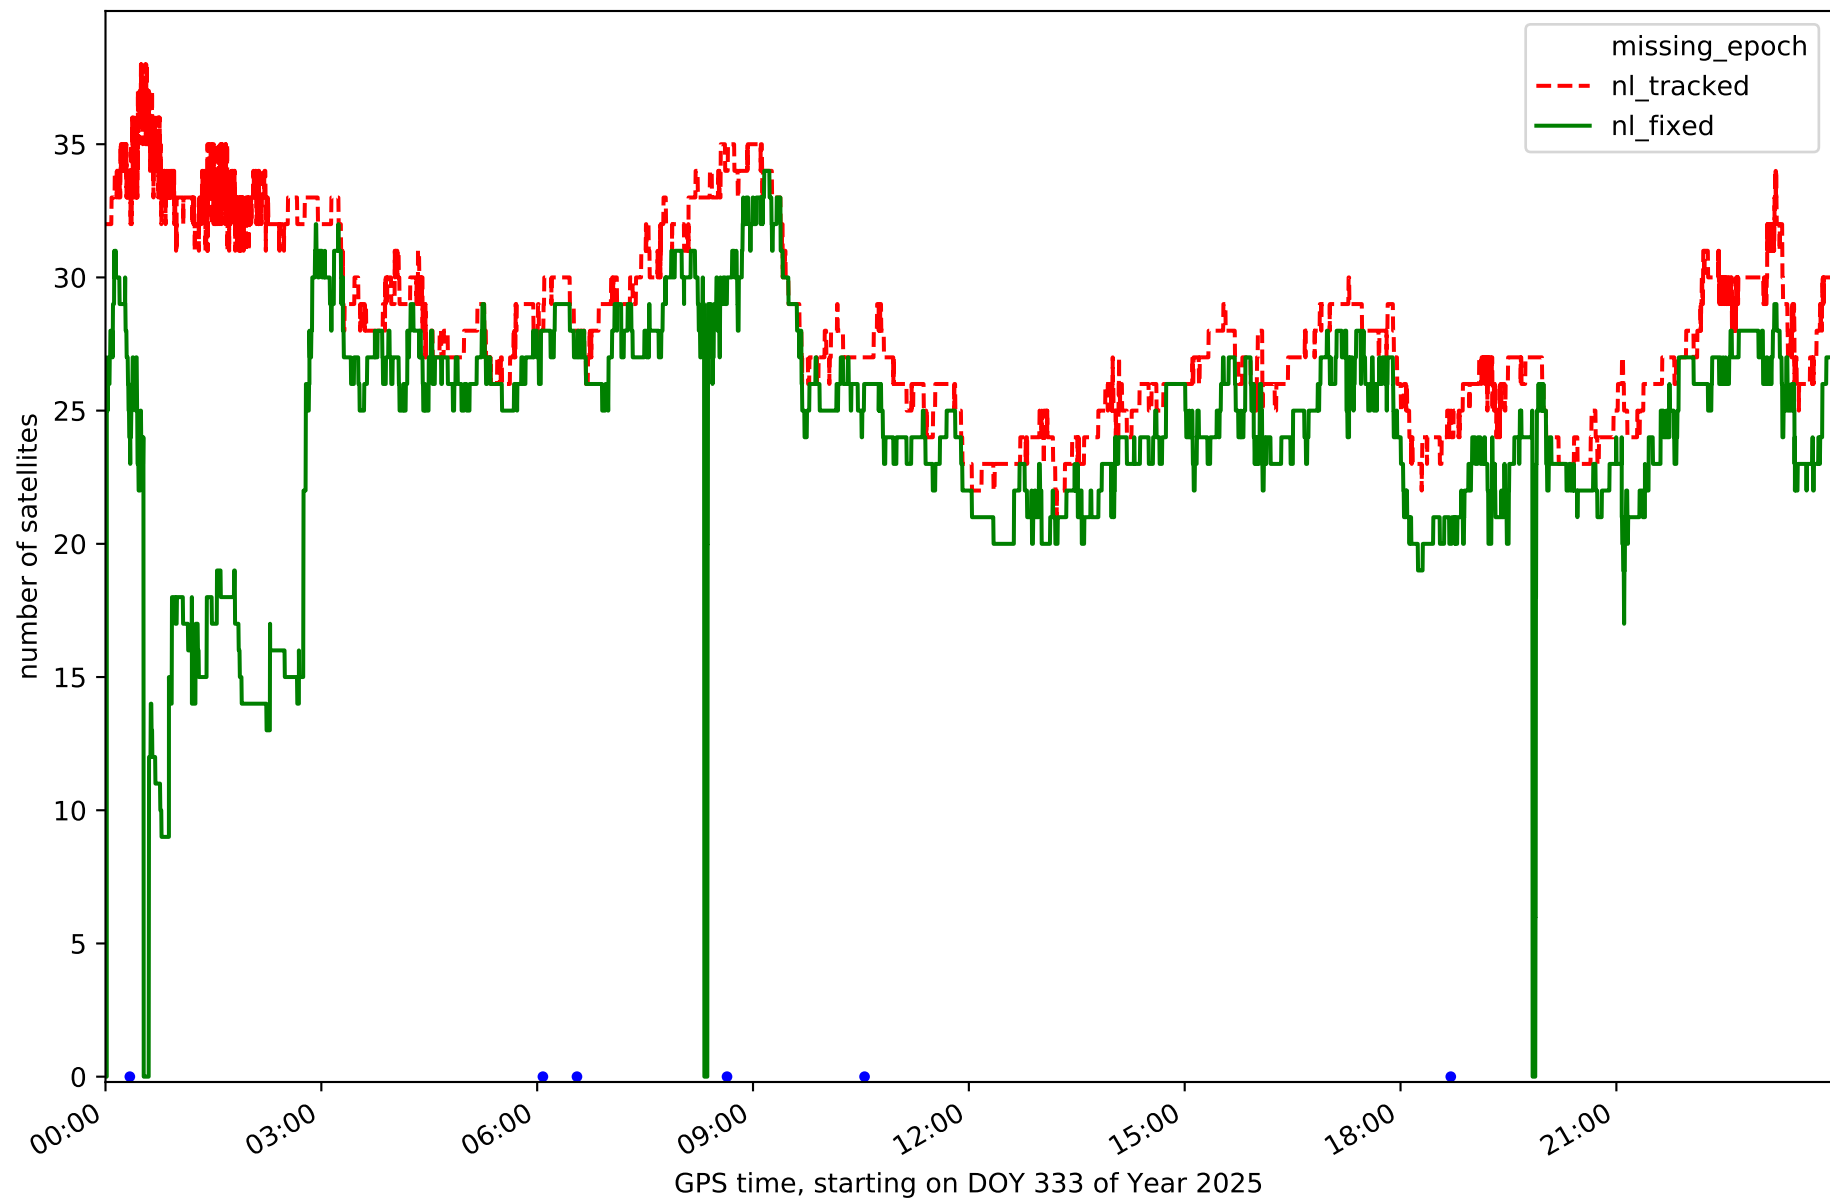


Station LRES in network N32T

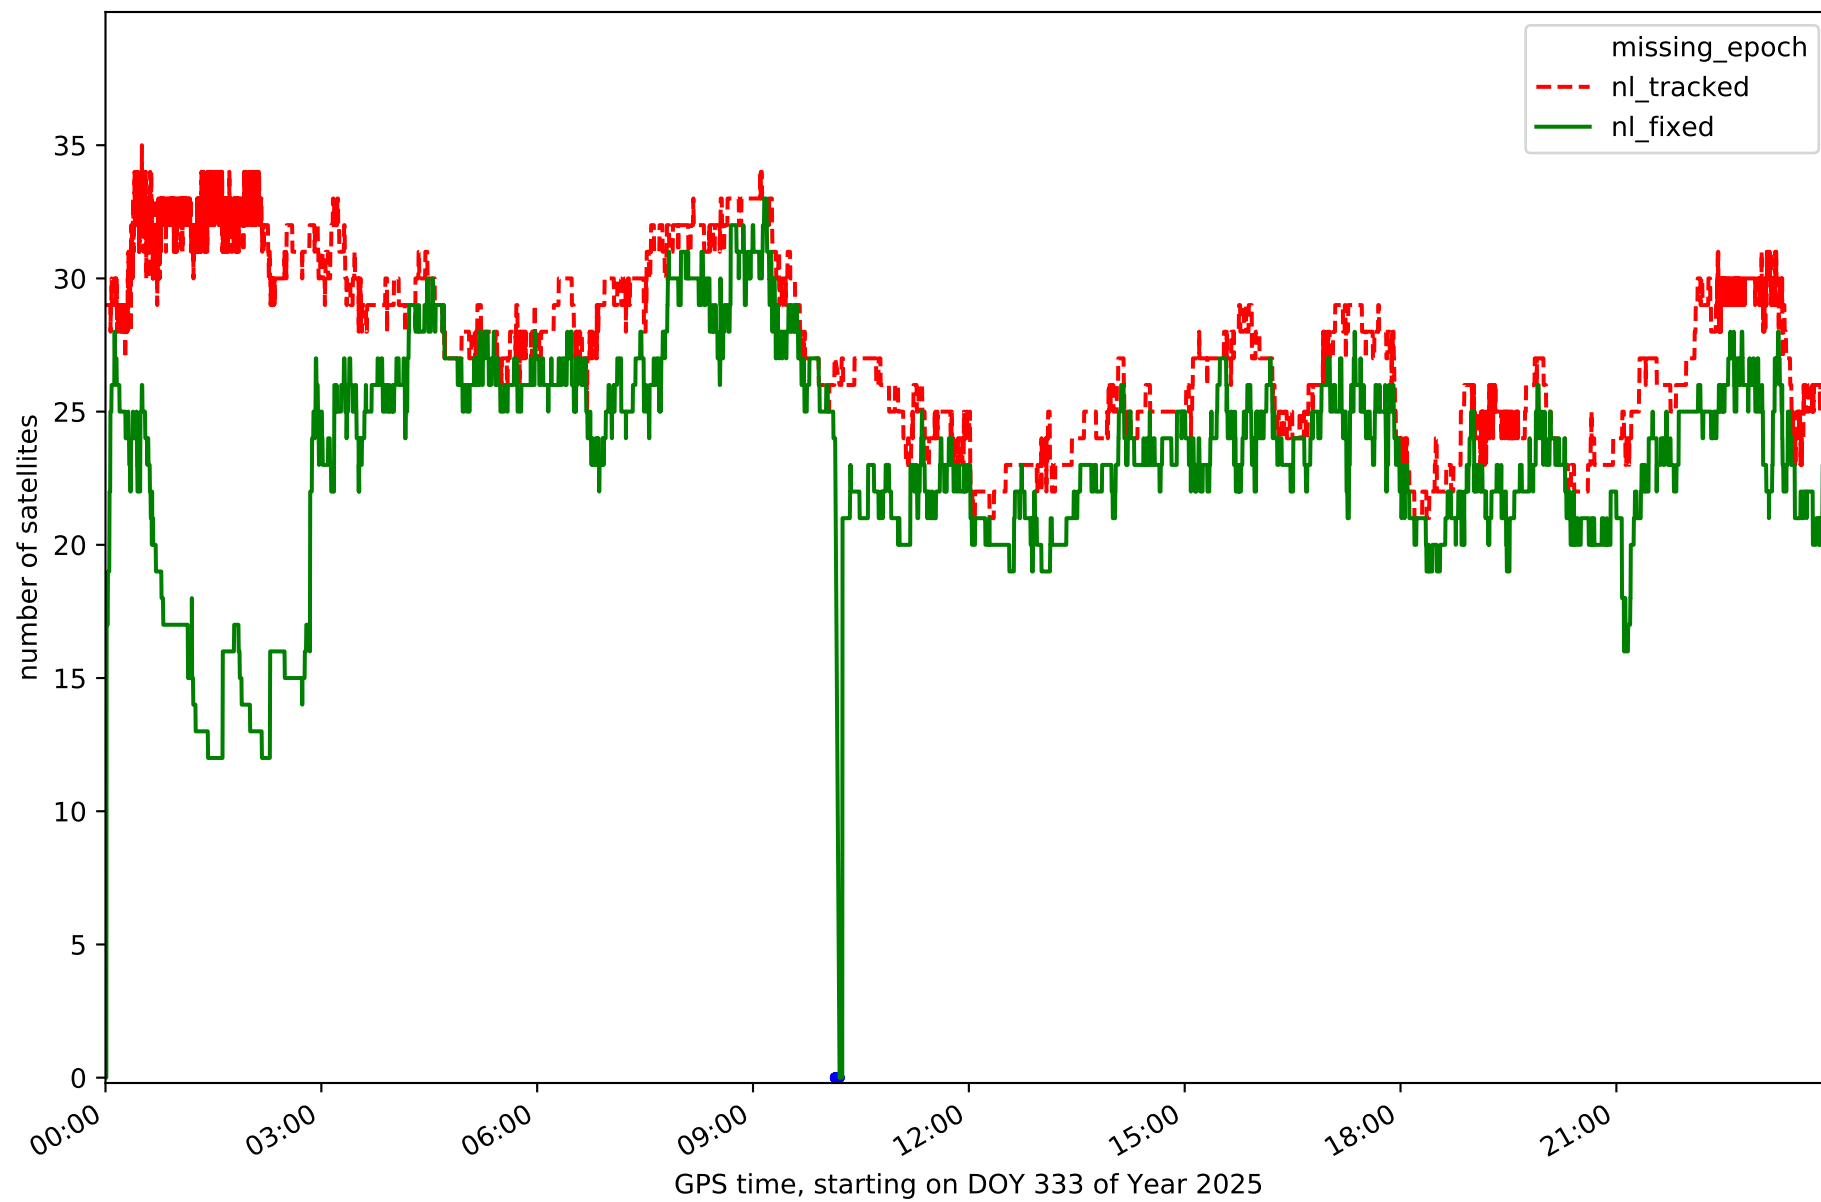


Station TN01 in network N32T

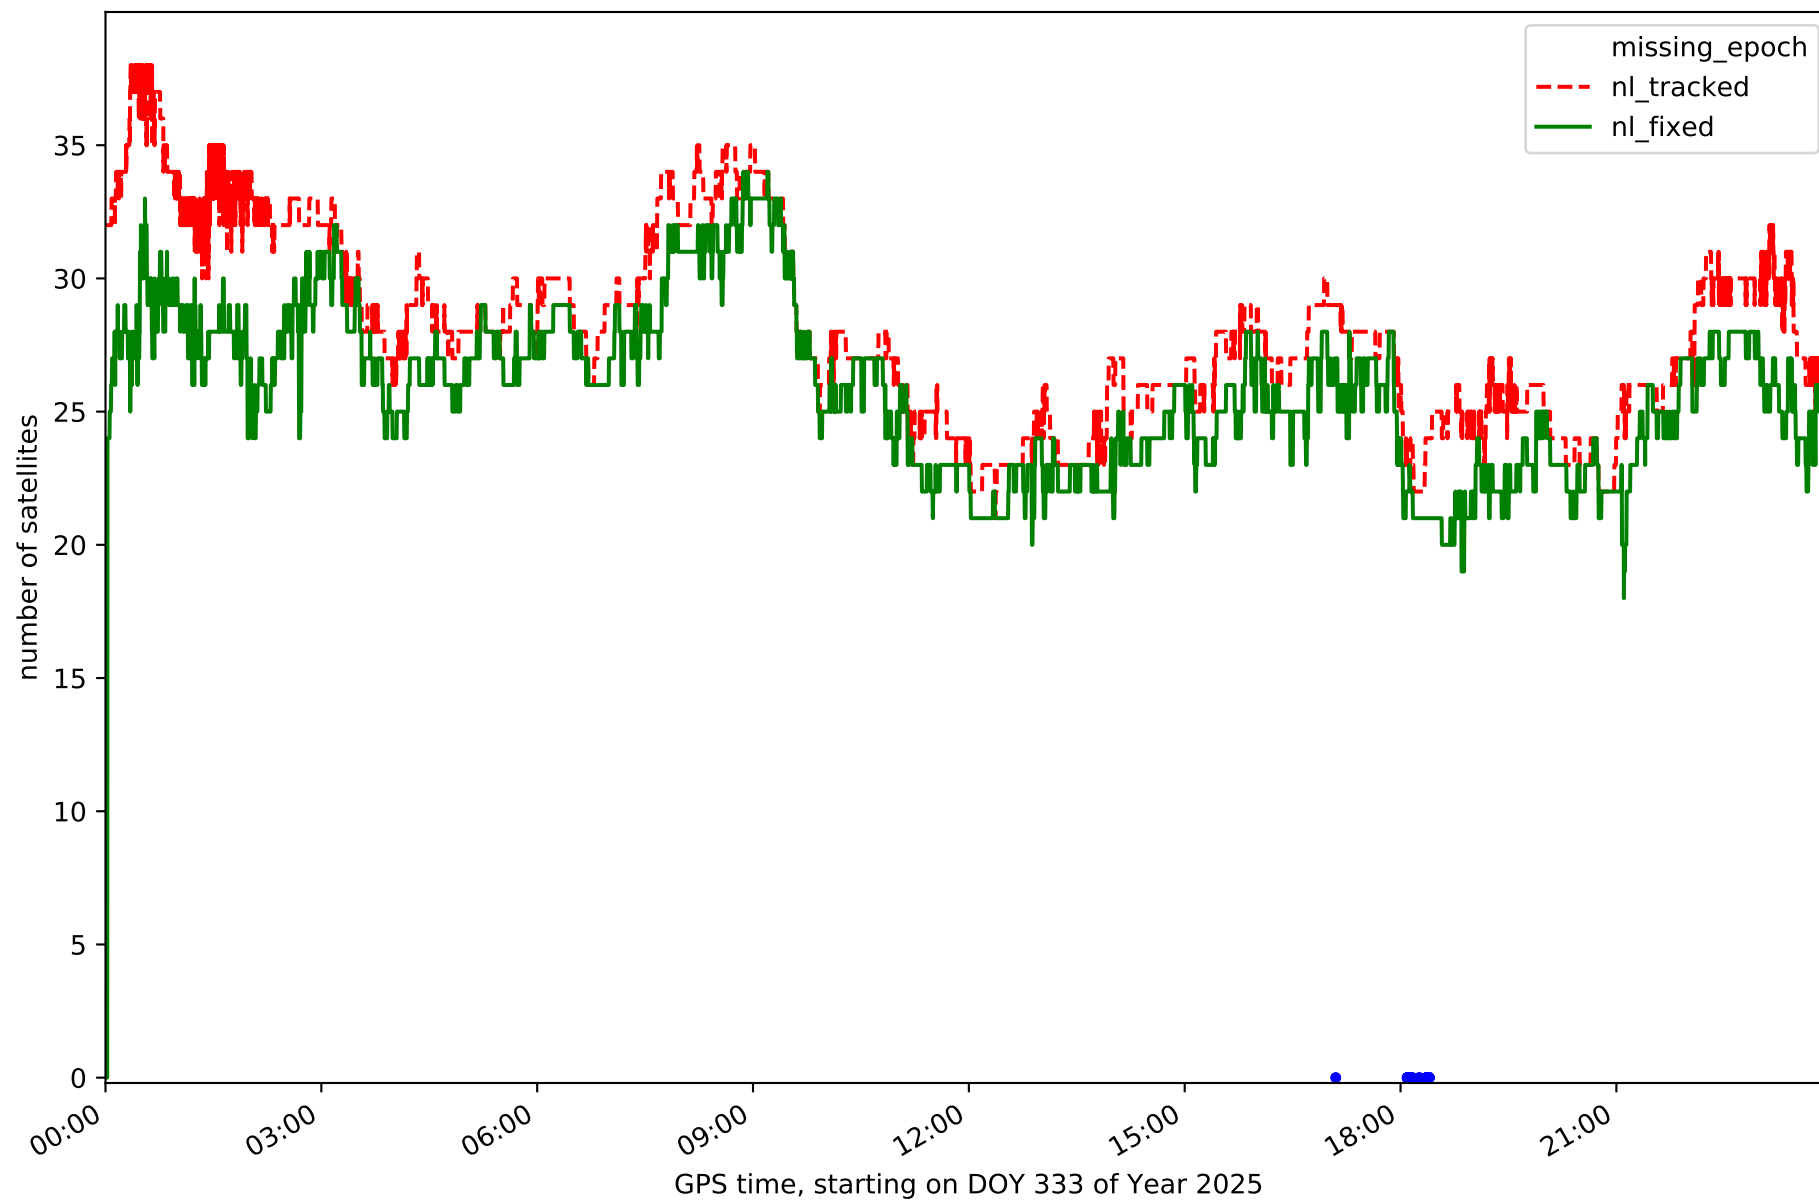


Station TN02 in network N32T

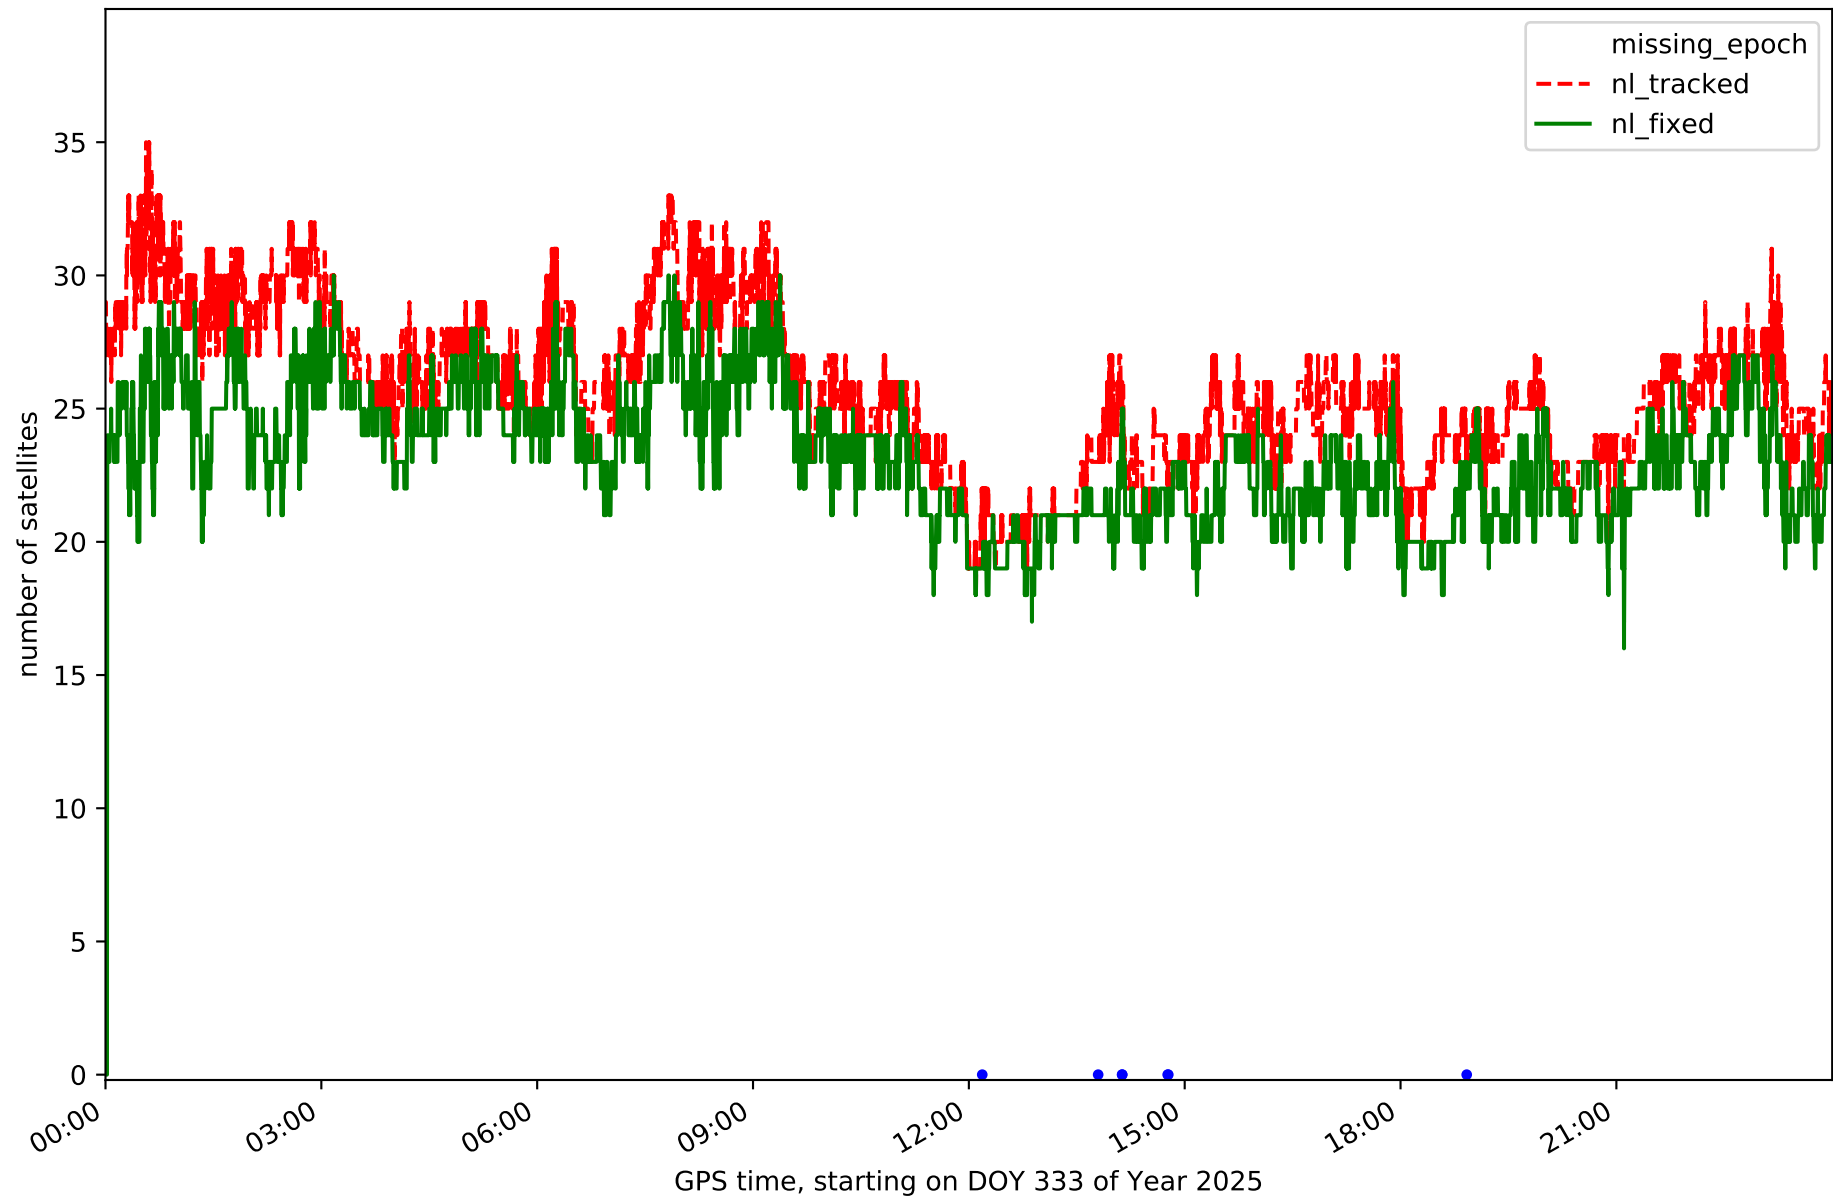


Station TN03 in network N32T

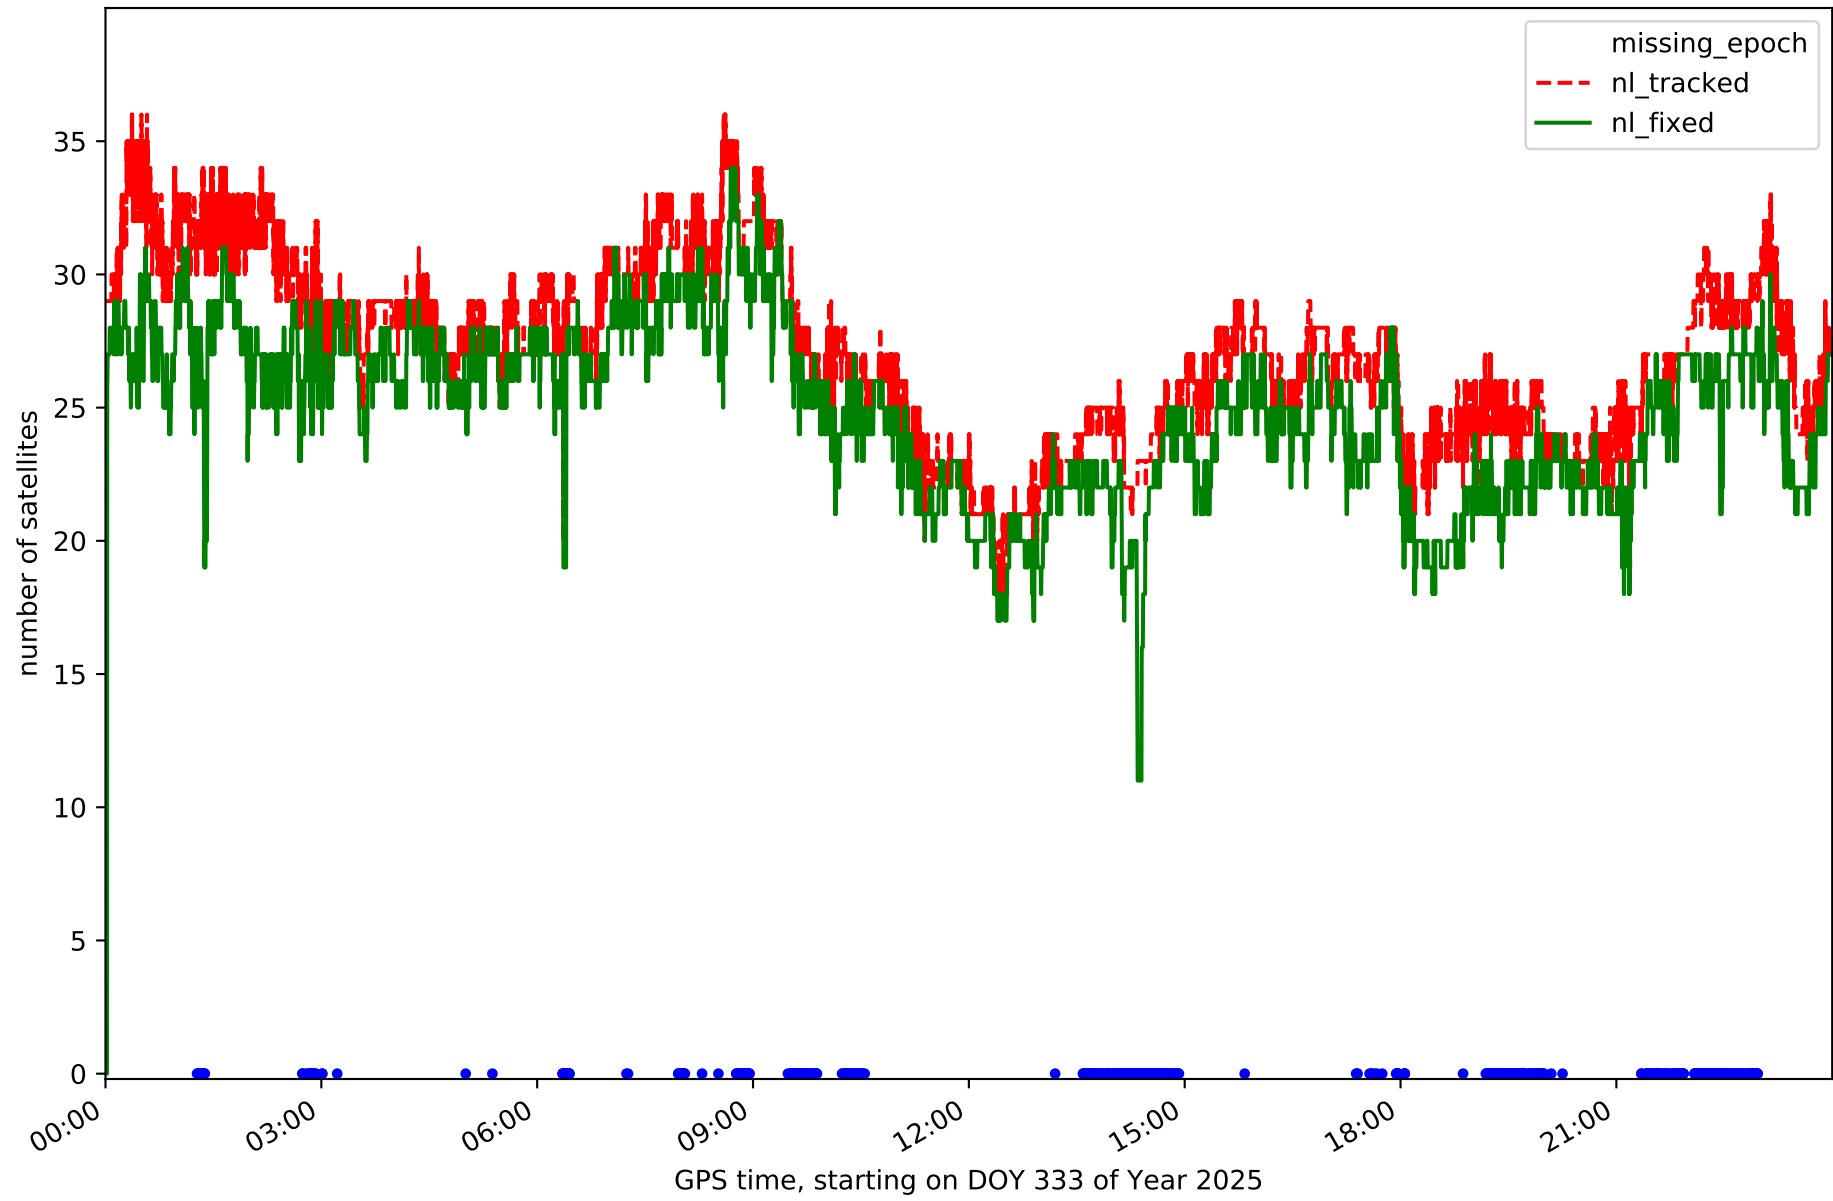


Station TN06 in network N32T

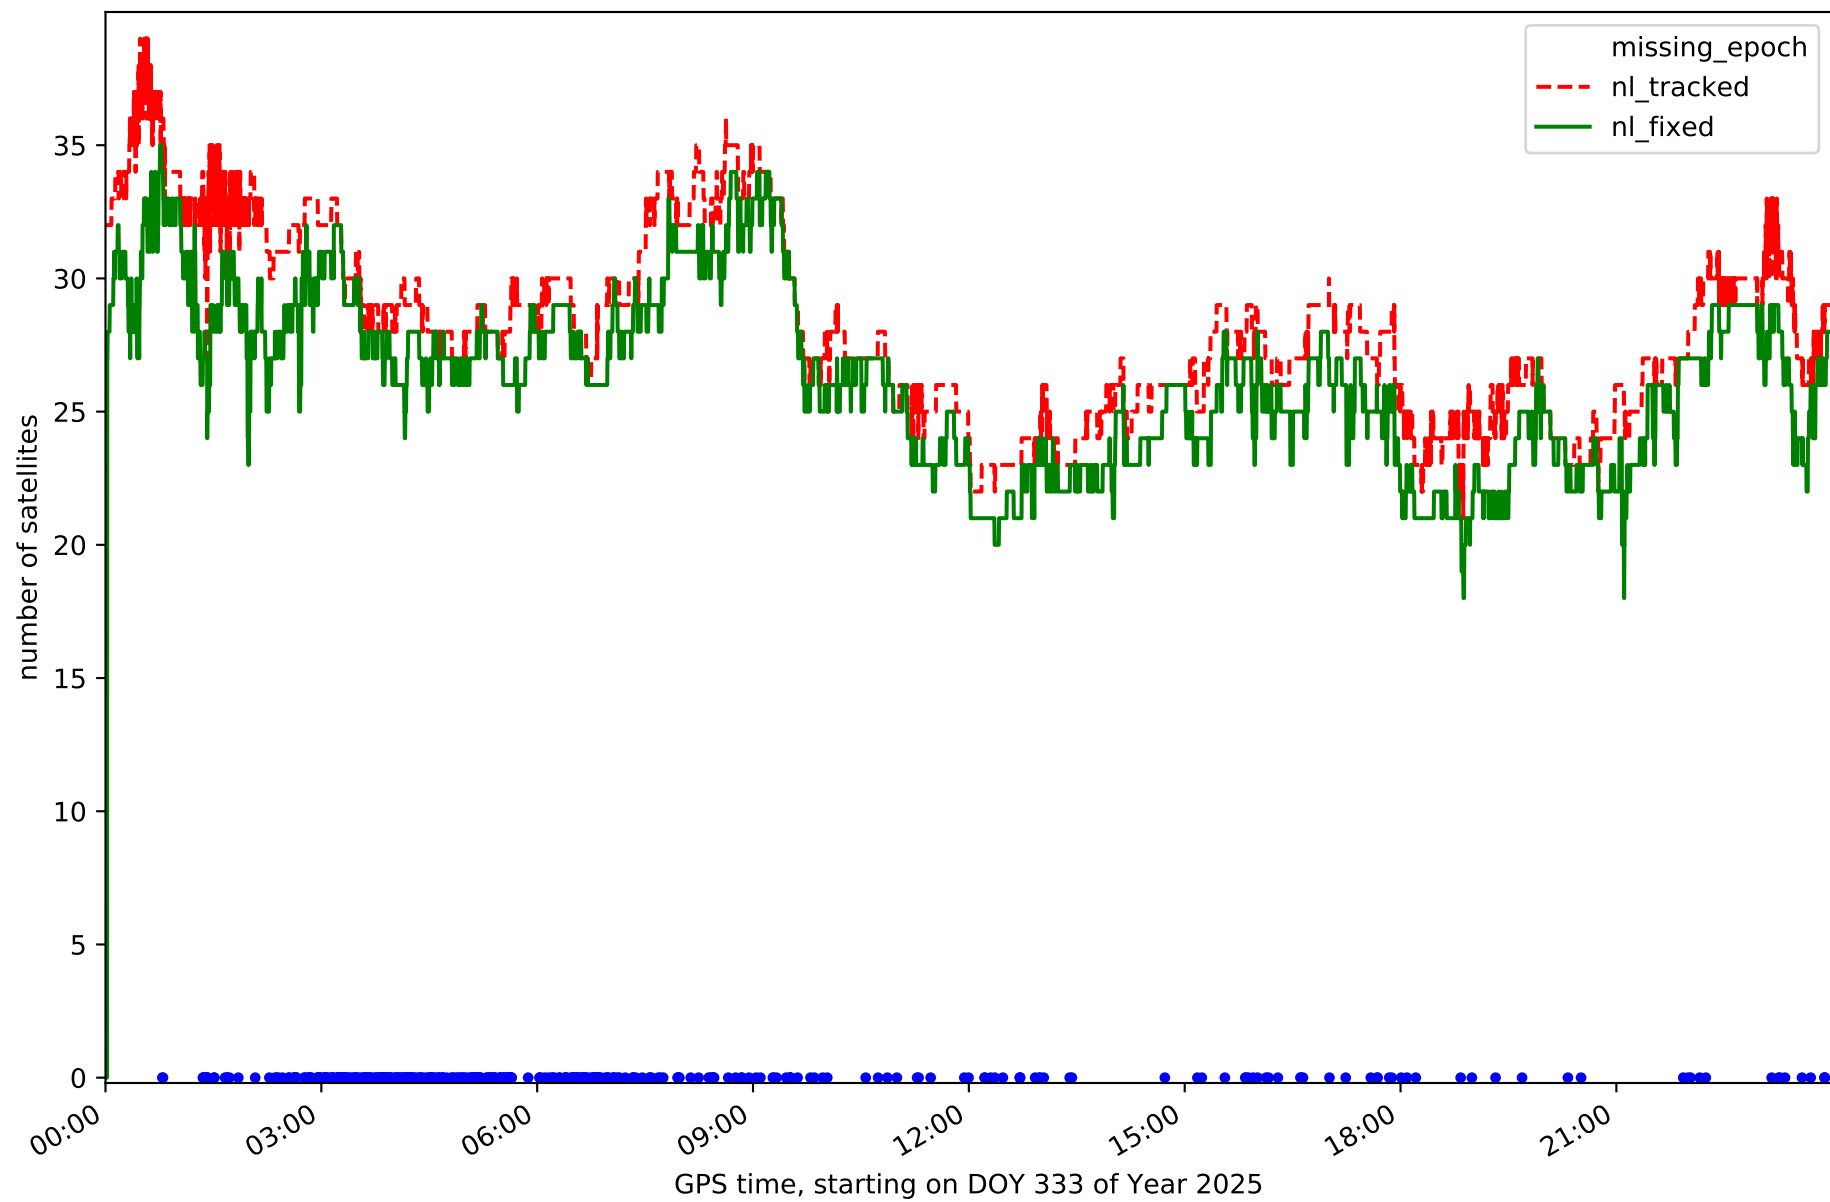


Station TN09 in network N32T

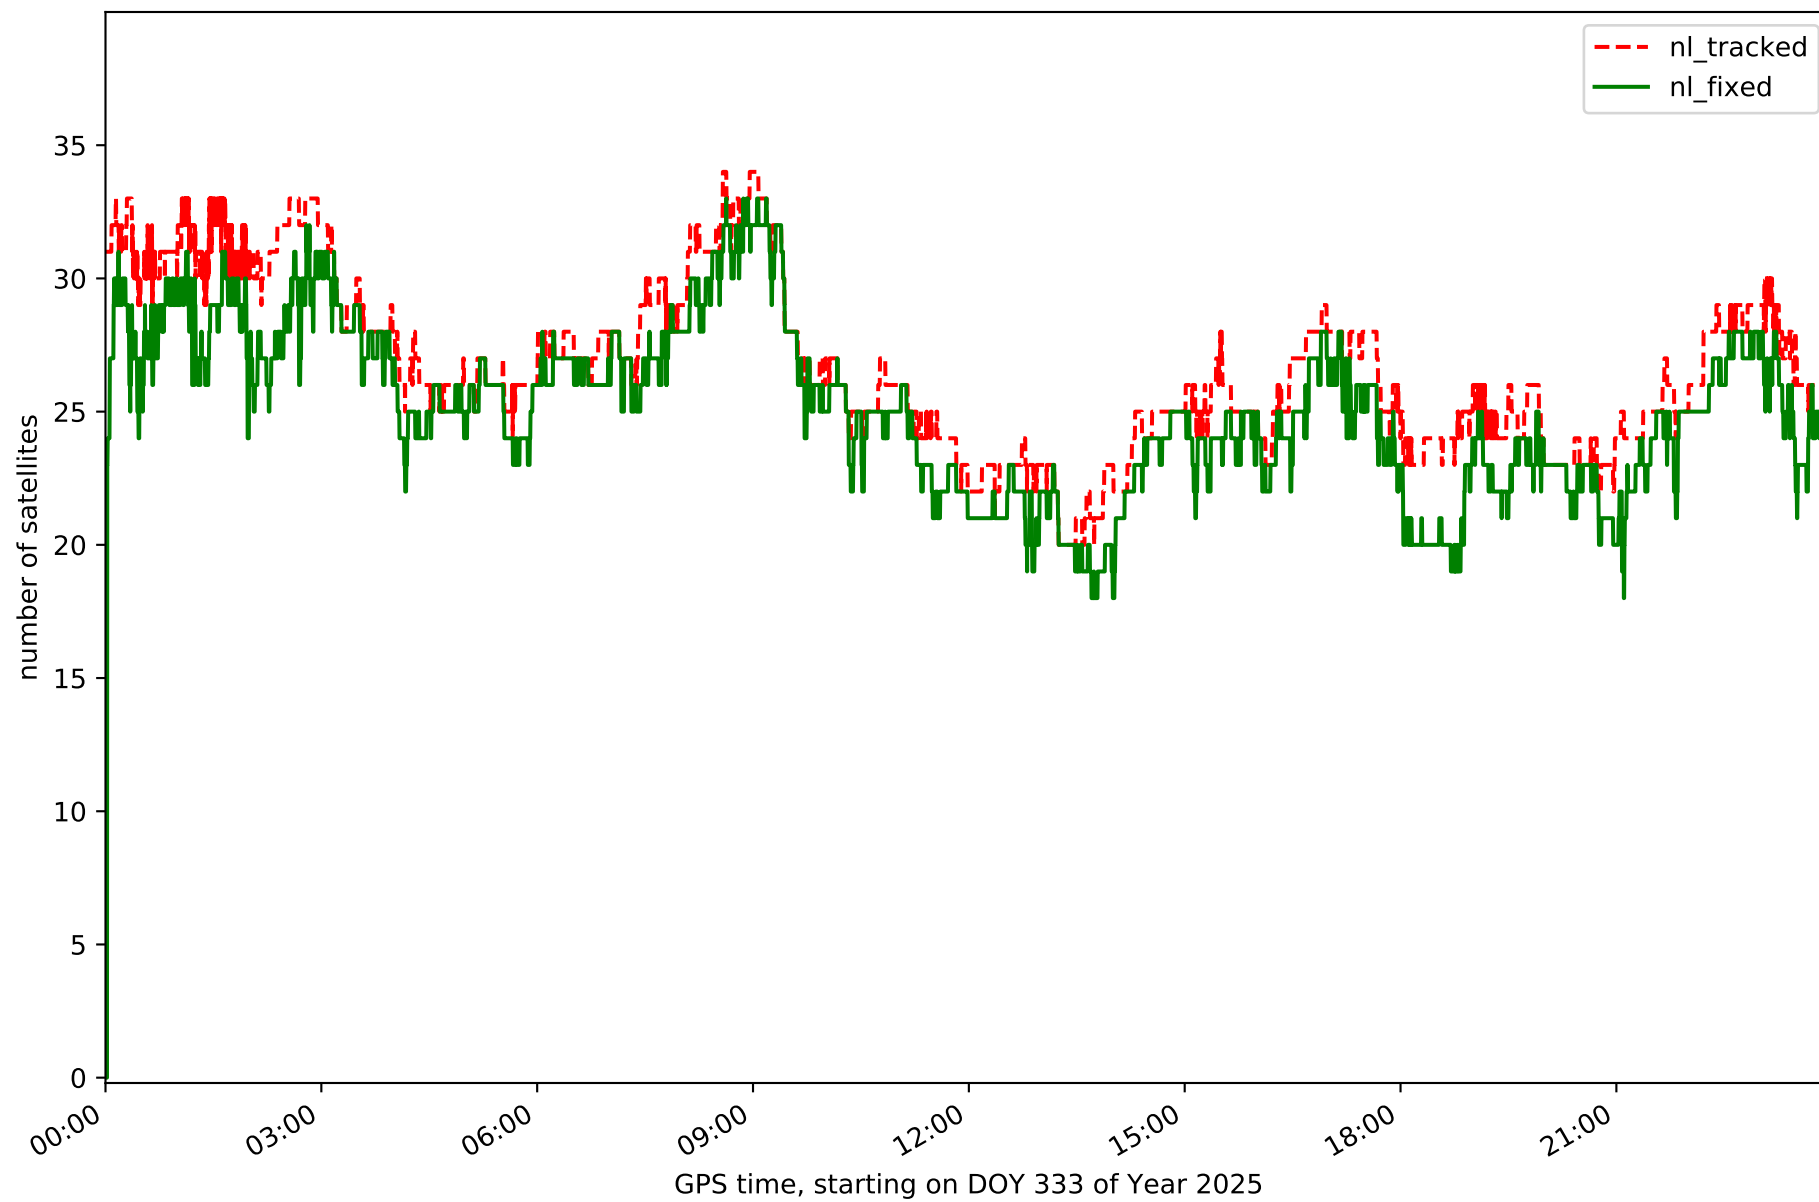


Station TE11 in network N32T

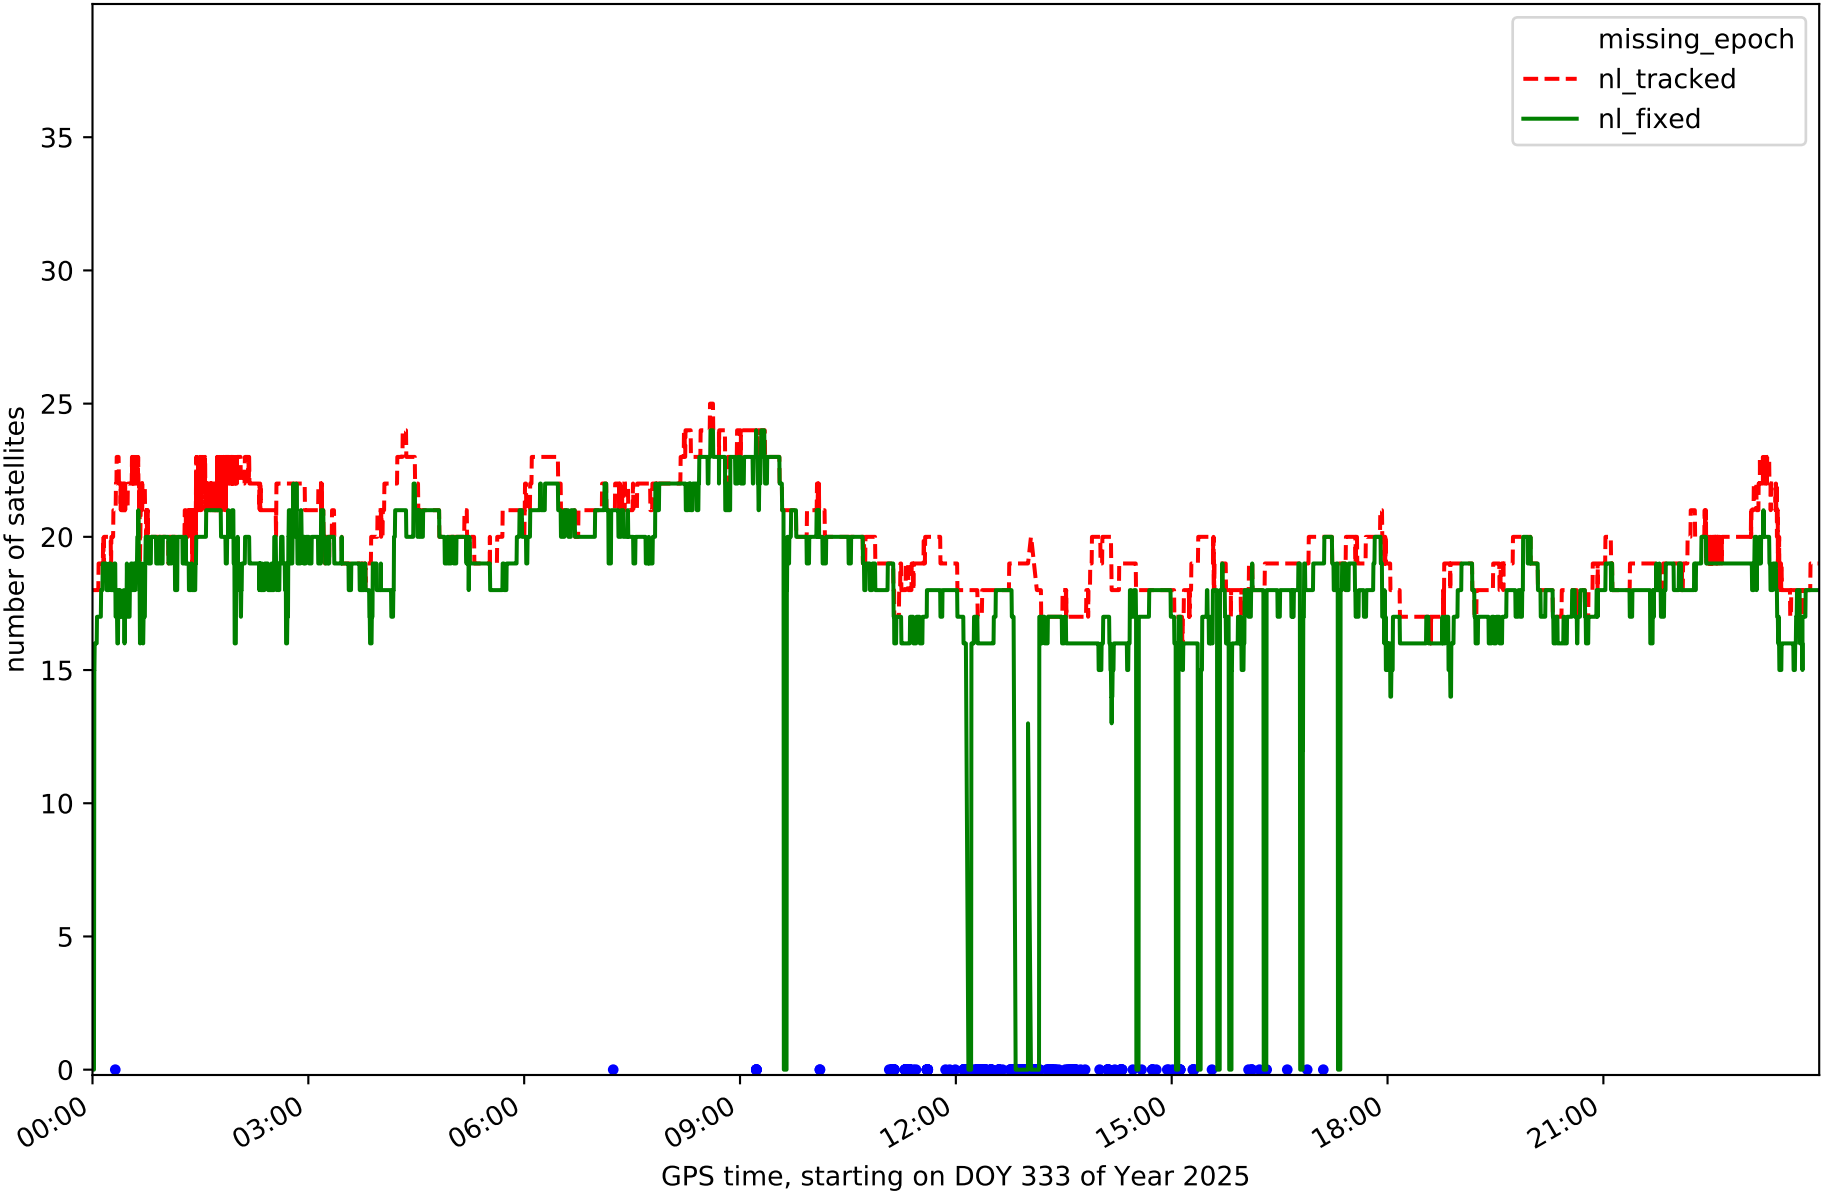


RefCheck for station EH01 in network N32T

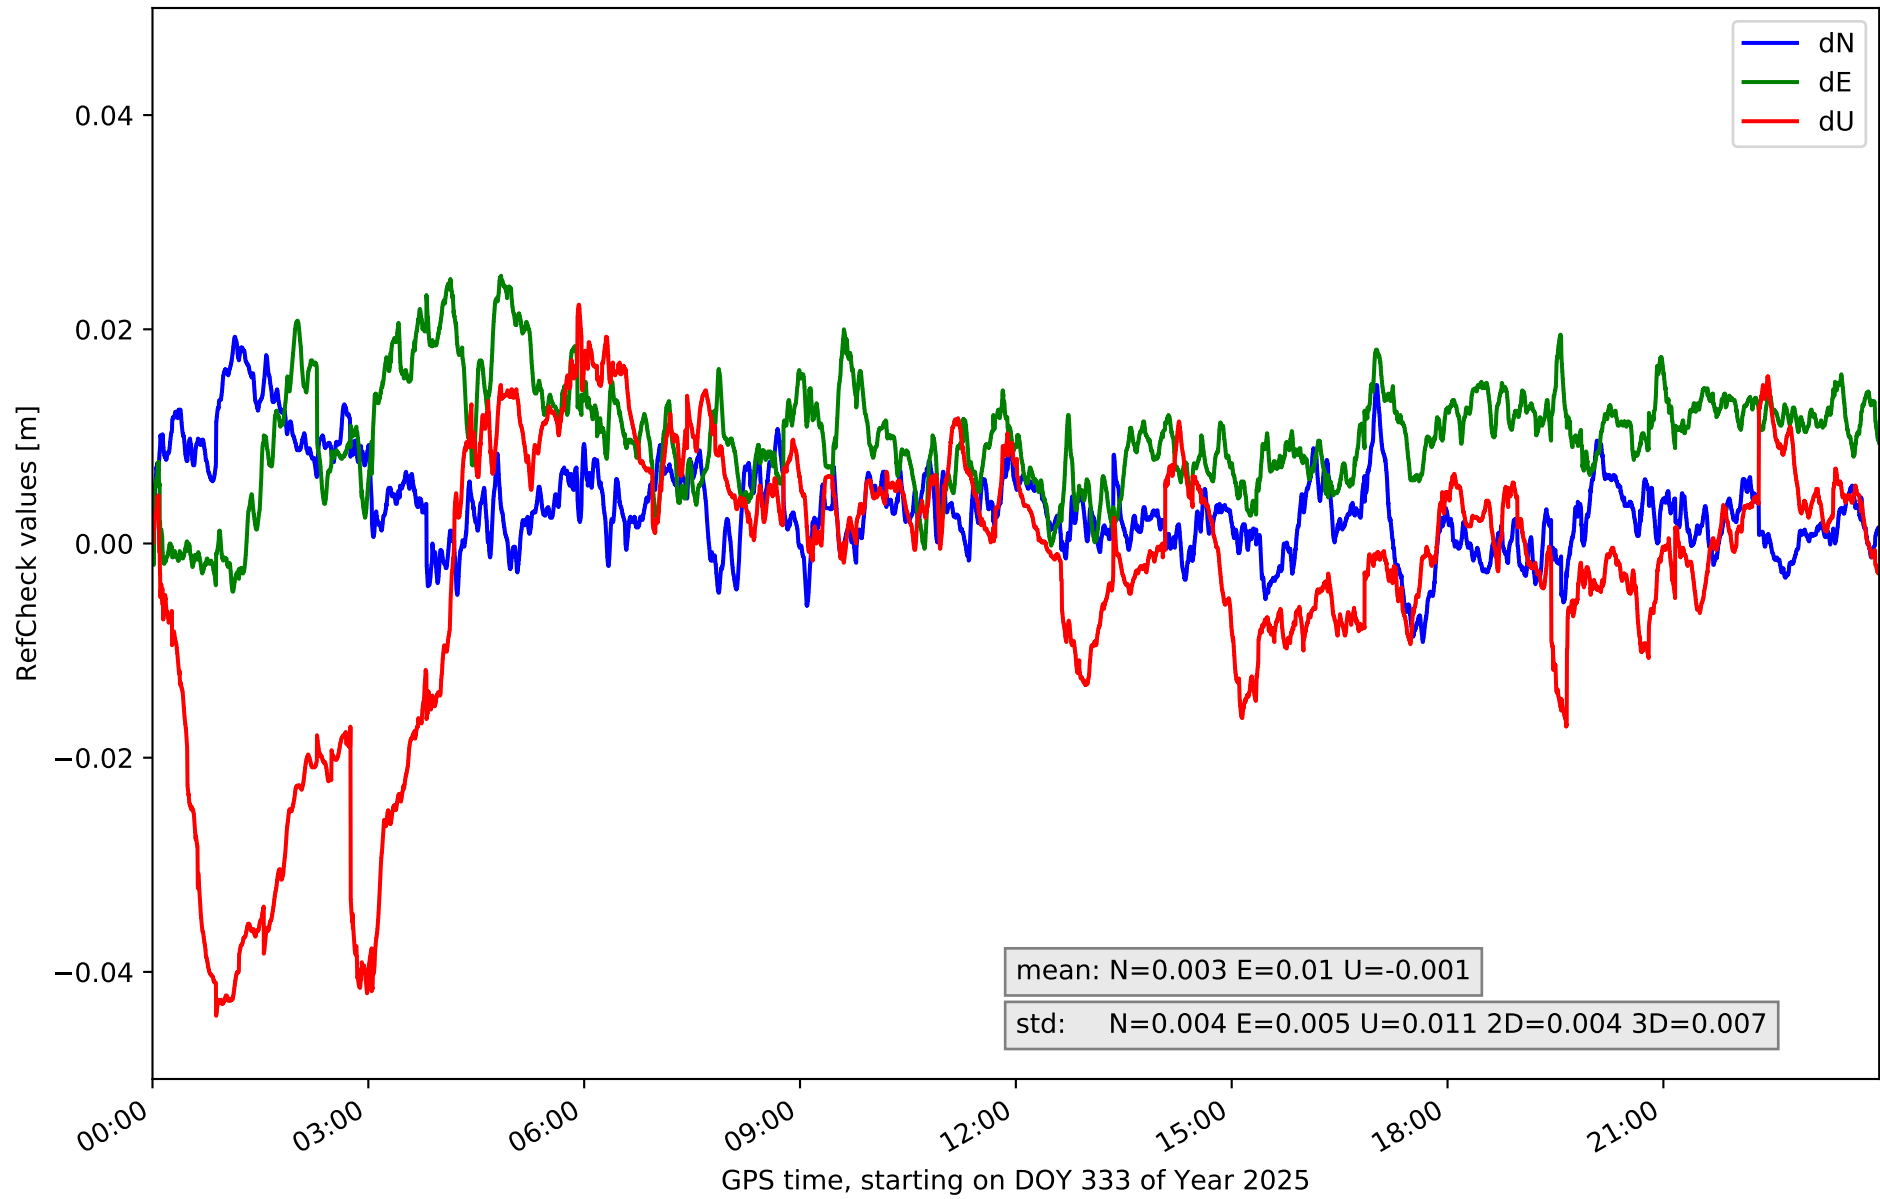


RefCheck for station EH02 in network N32T

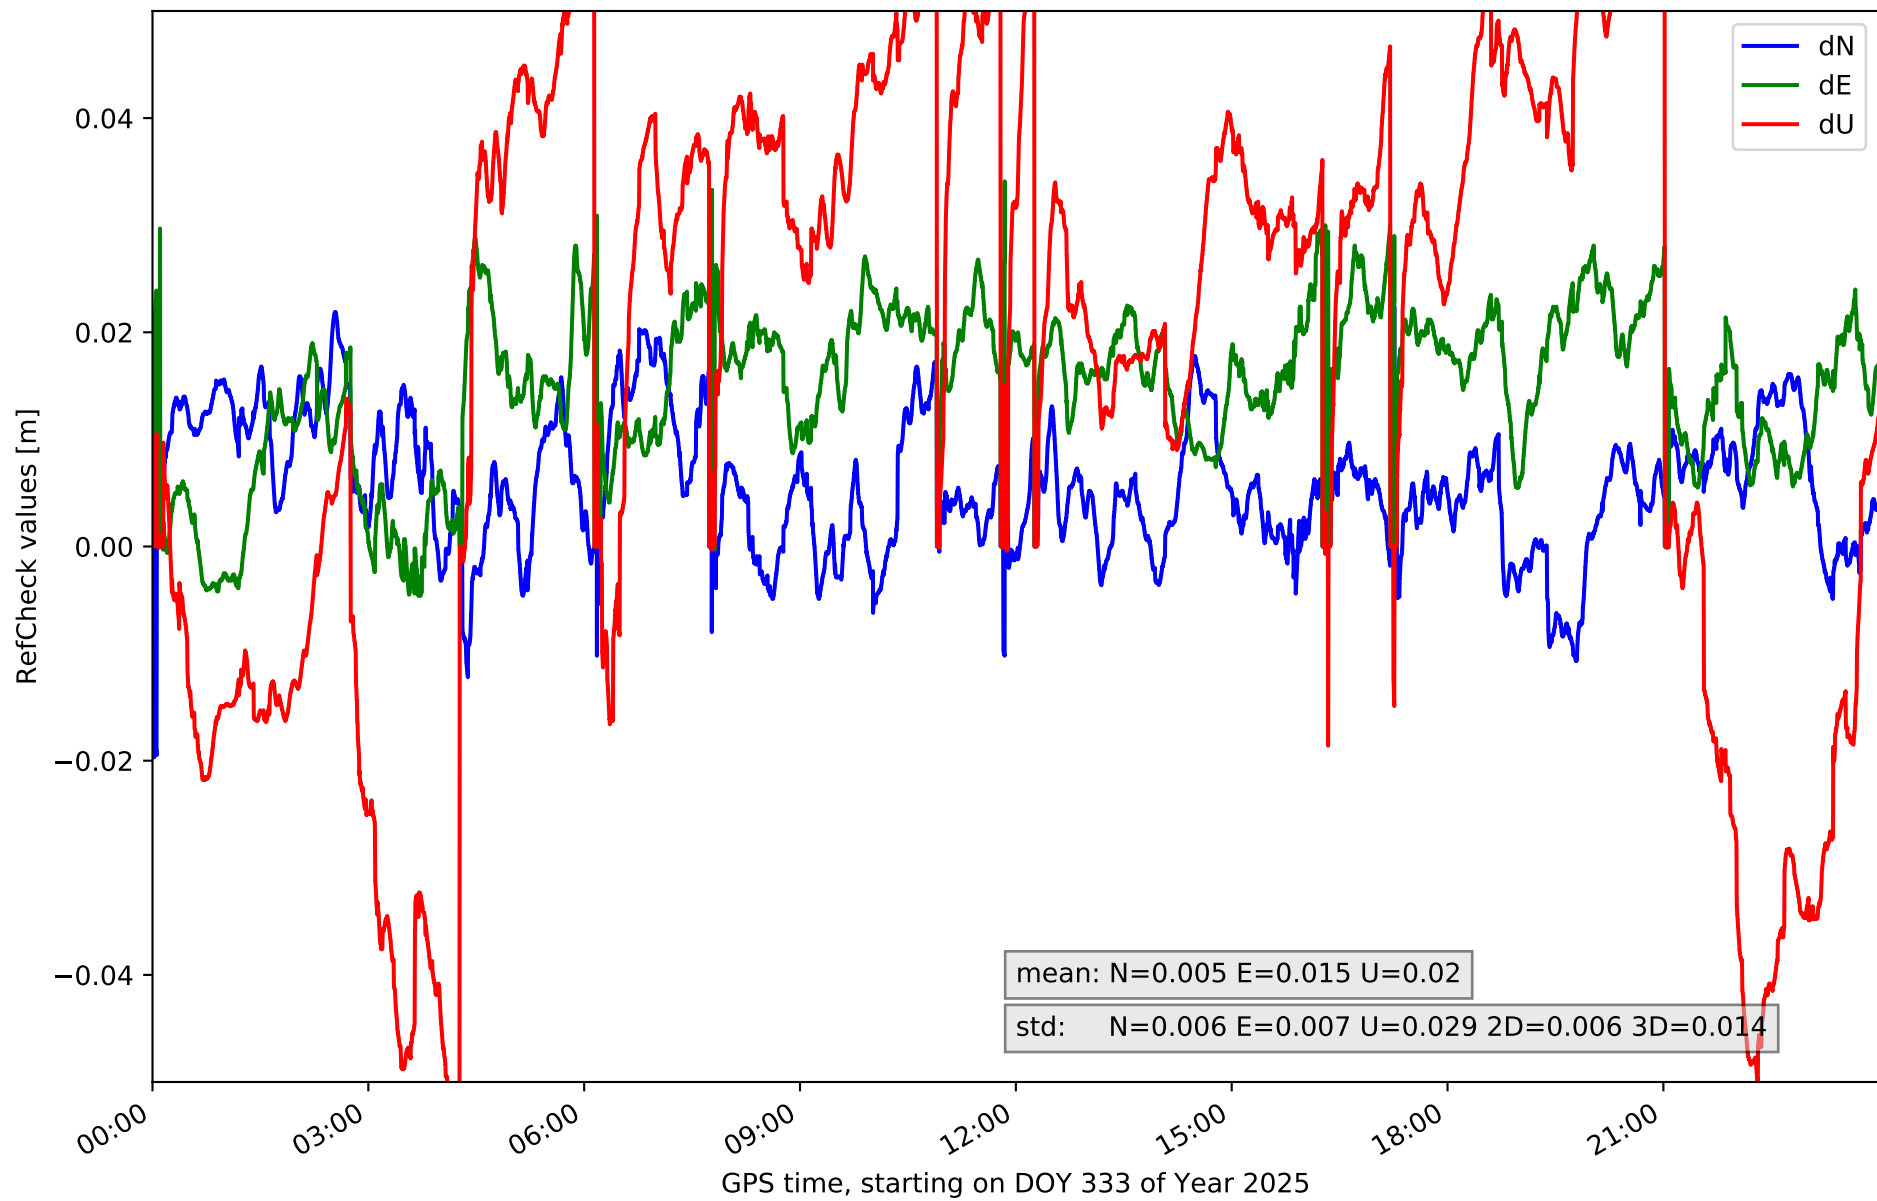


RefCheck for station GOM1 in network N32T

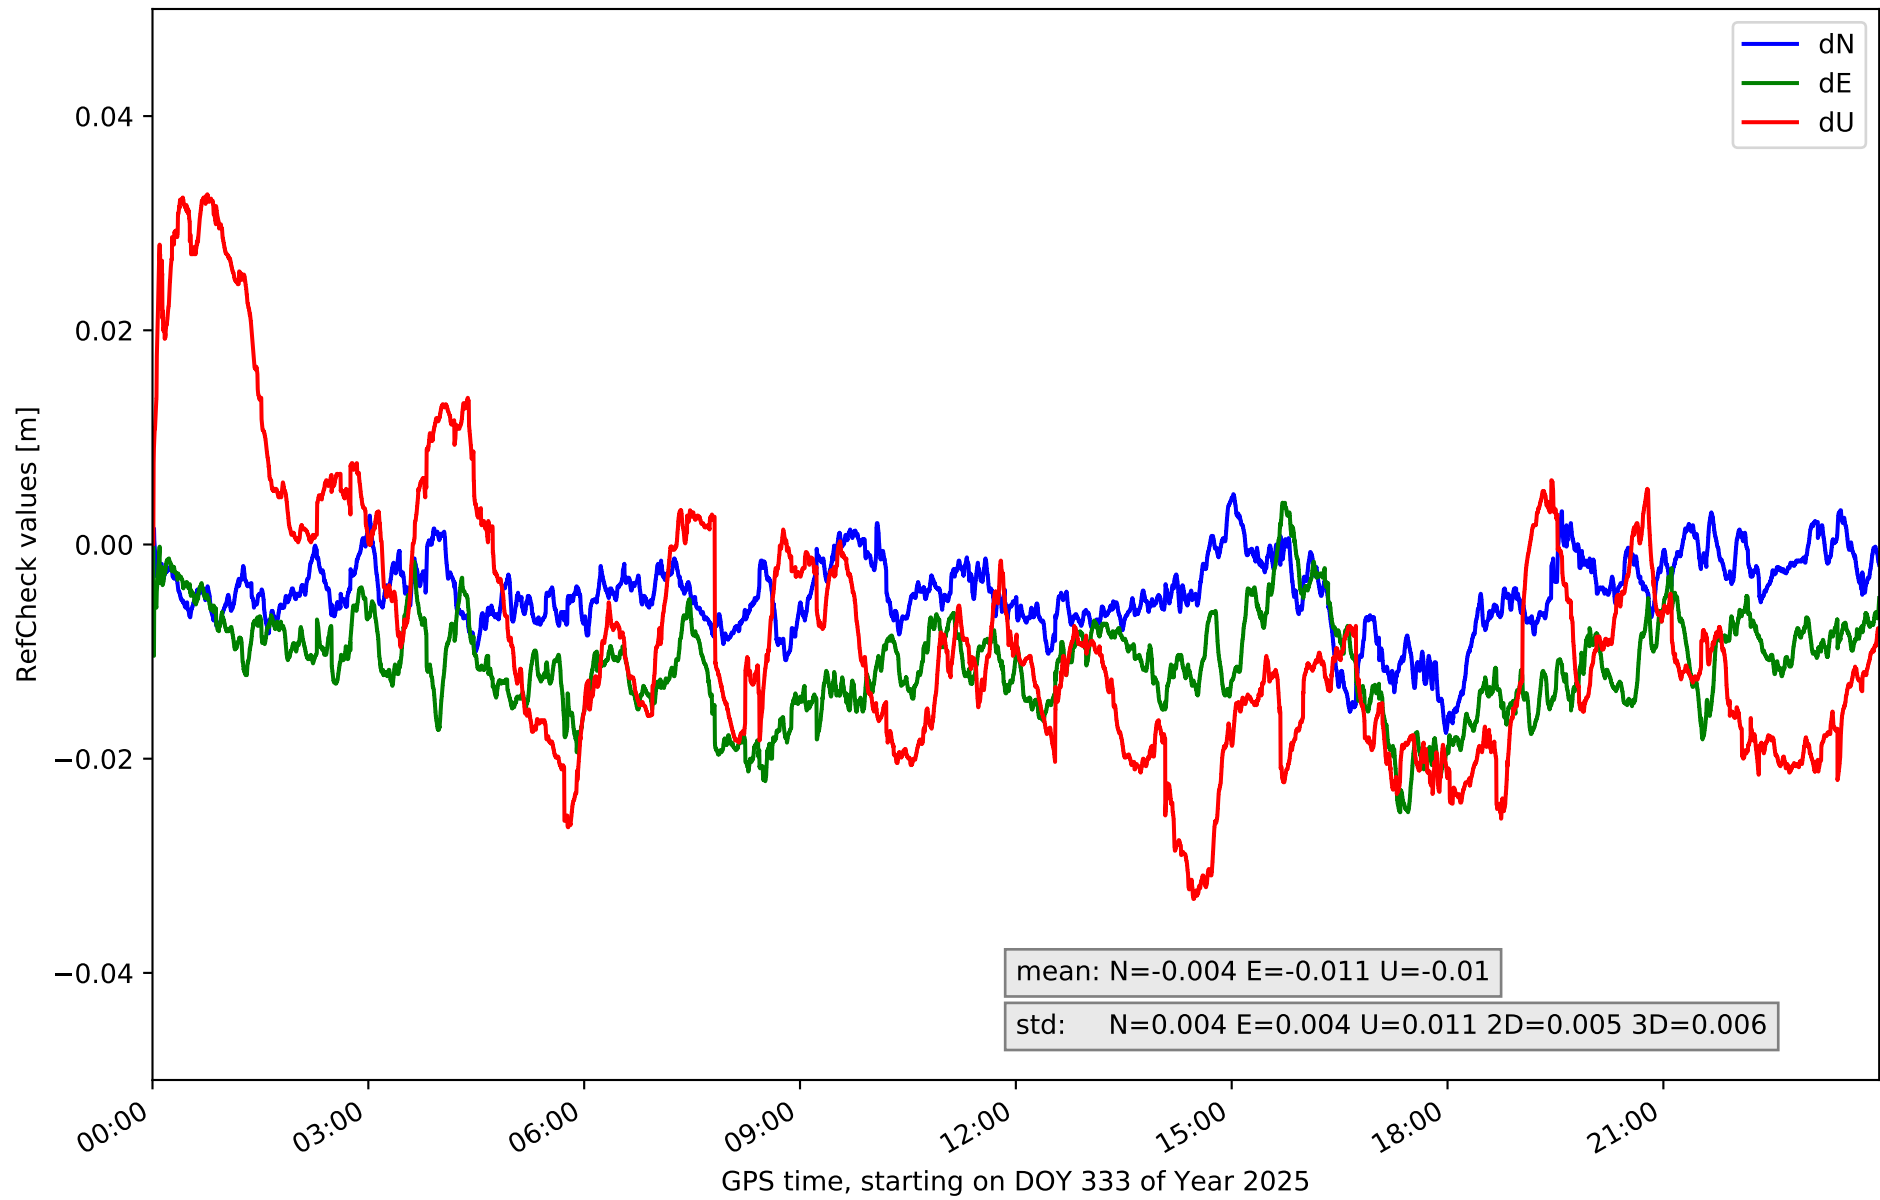


RefCheck for station GOME in network N32T

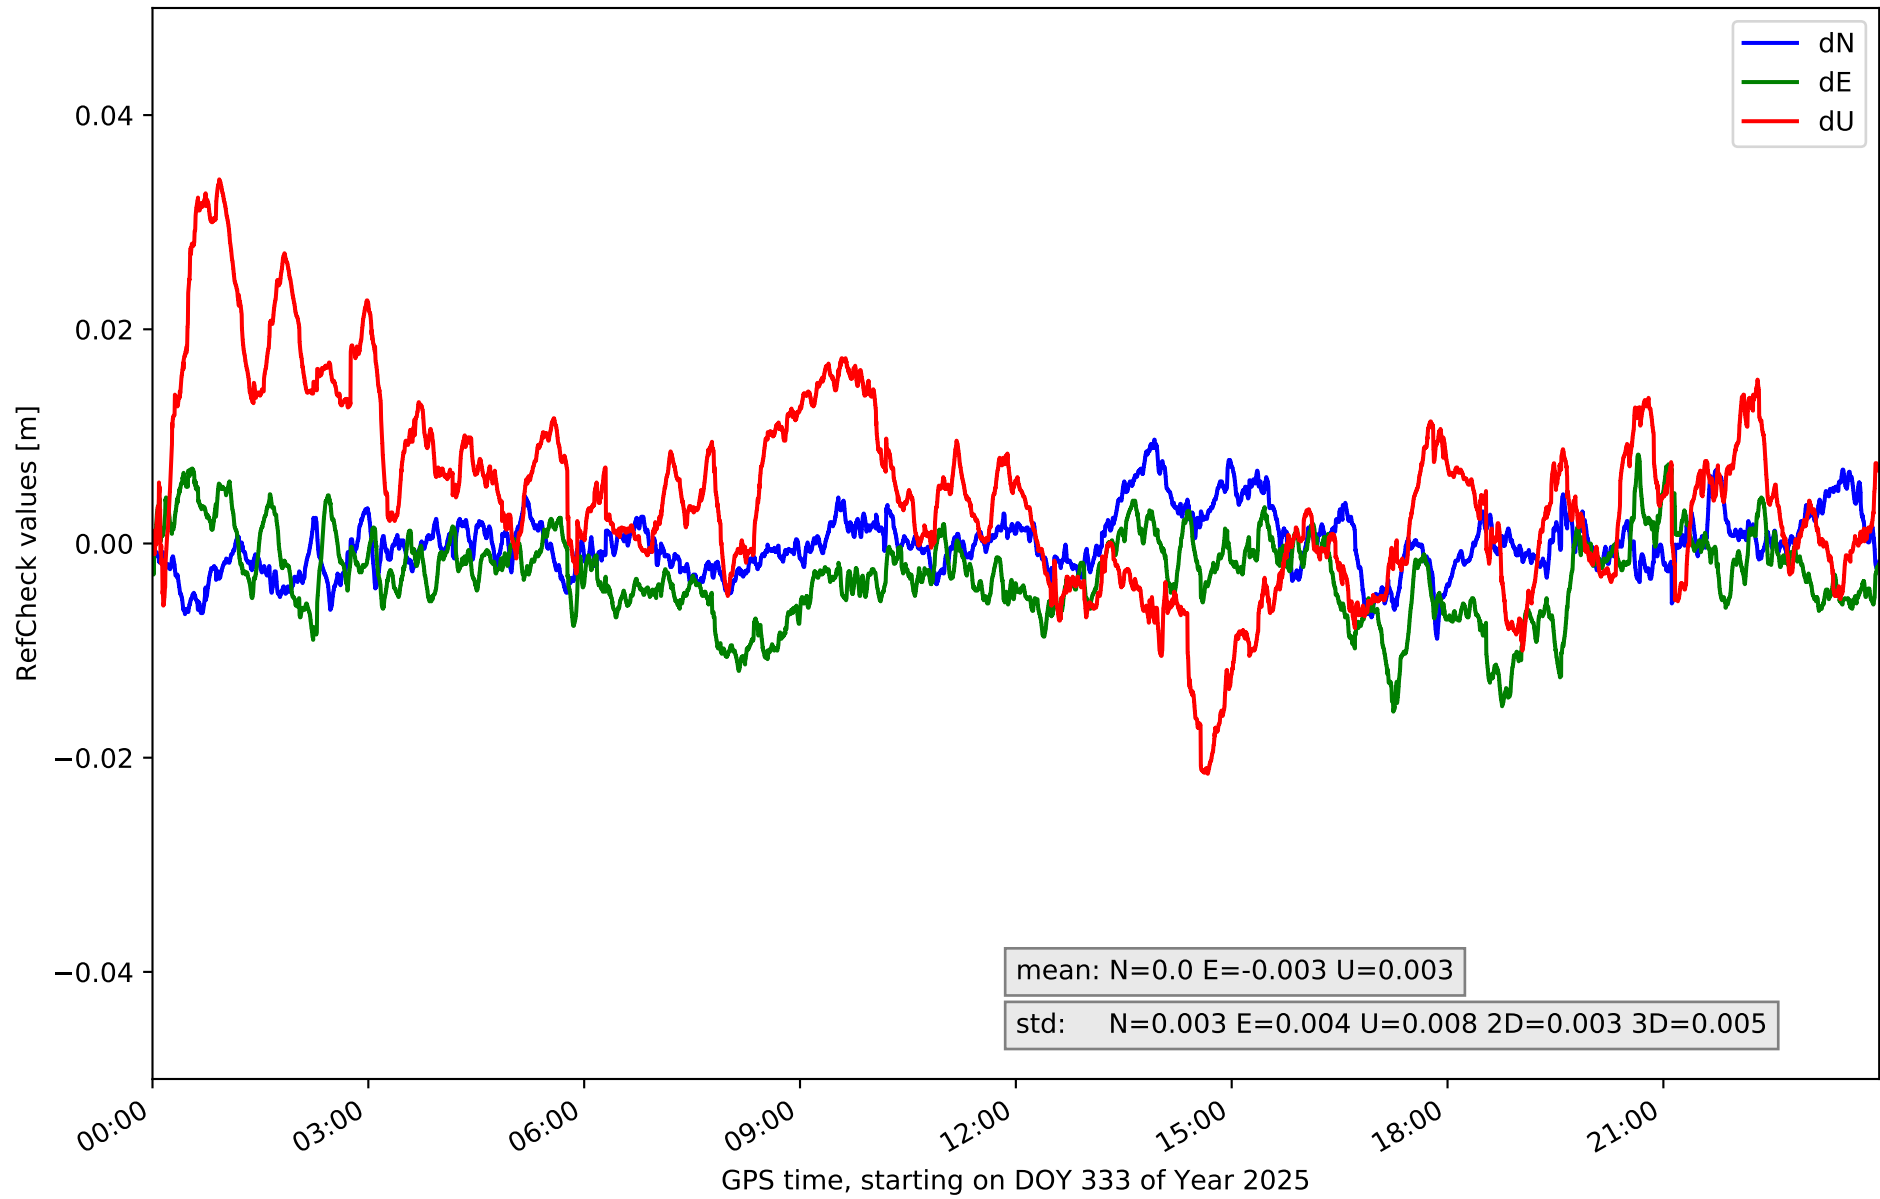


RefCheck for station IZAN in network N32T

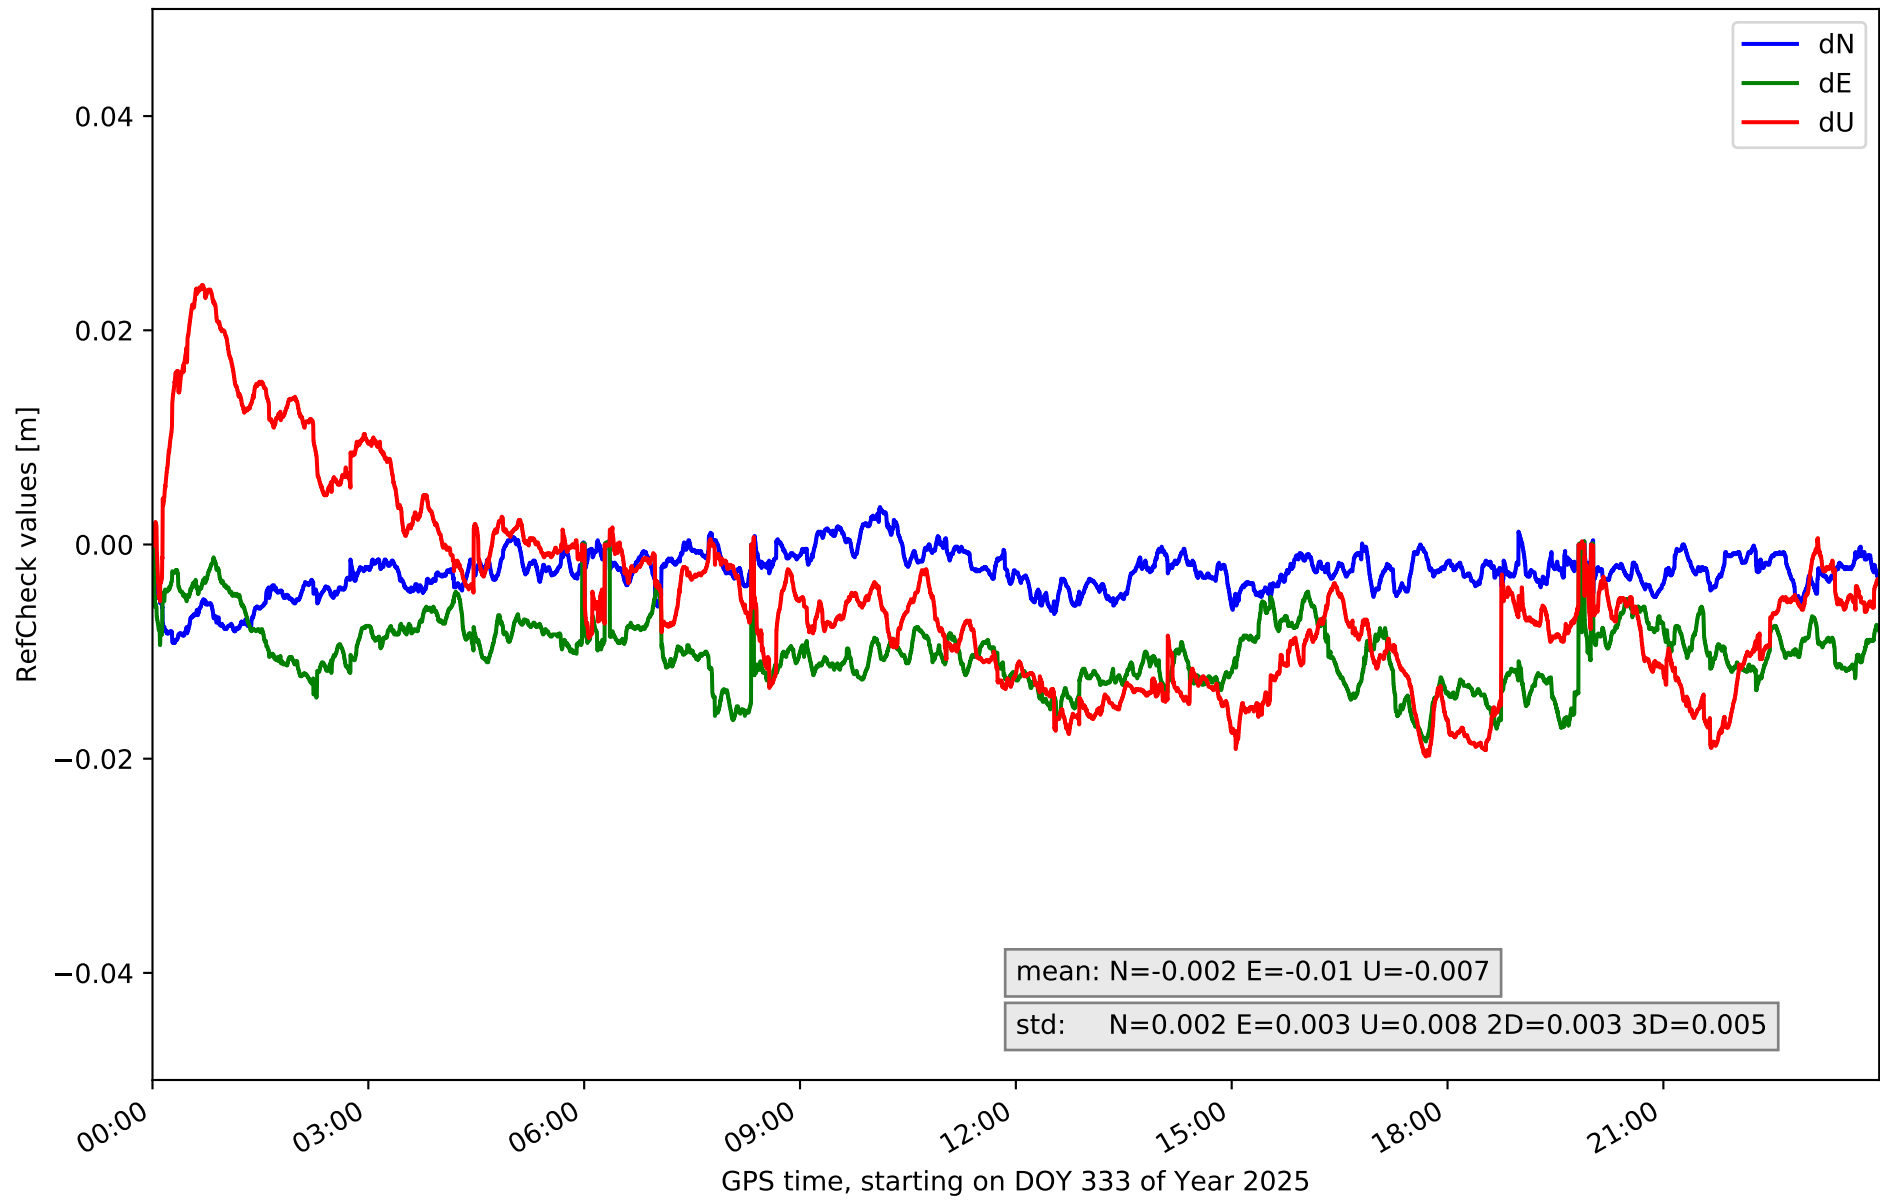


RefCheck for station LP01 in network N32T

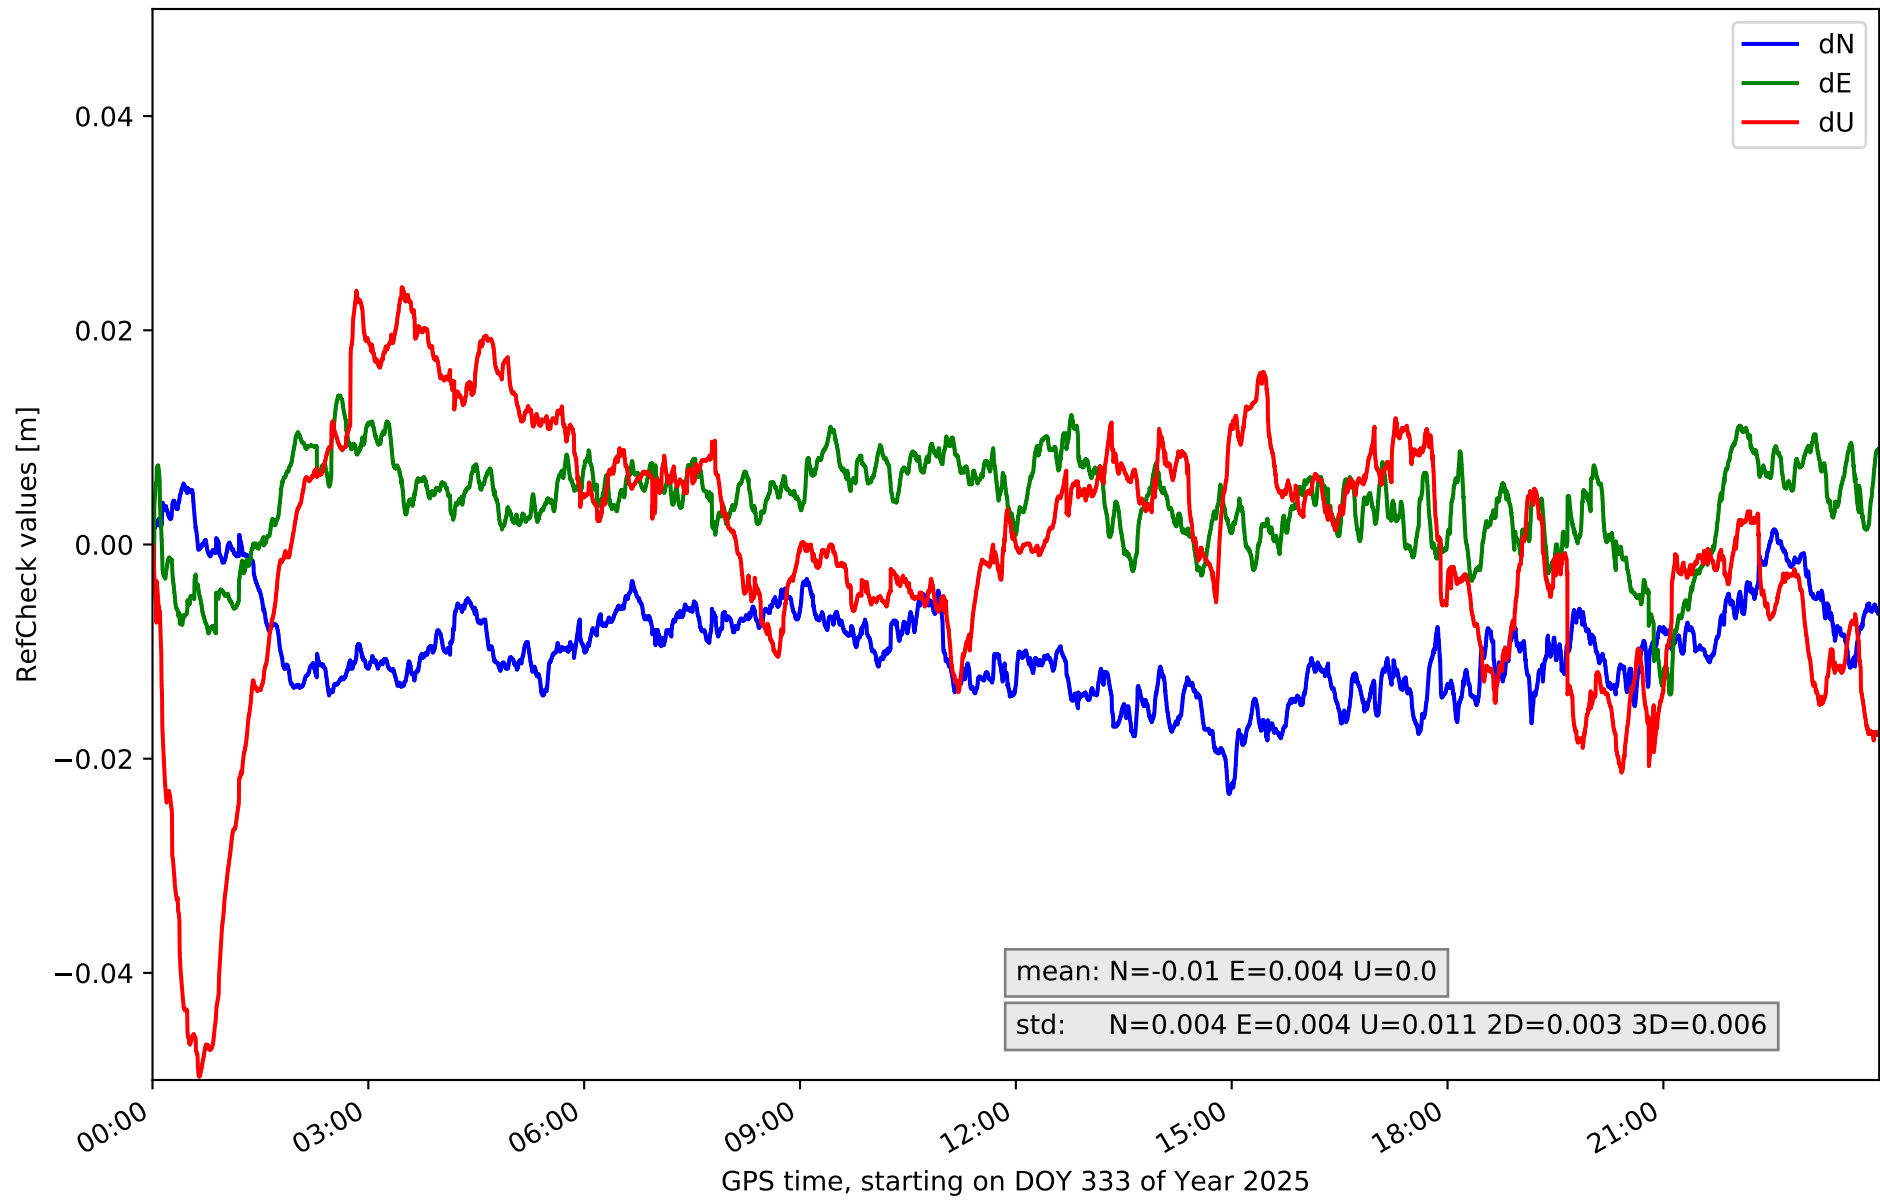


RefCheck for station LP03 in network N32T

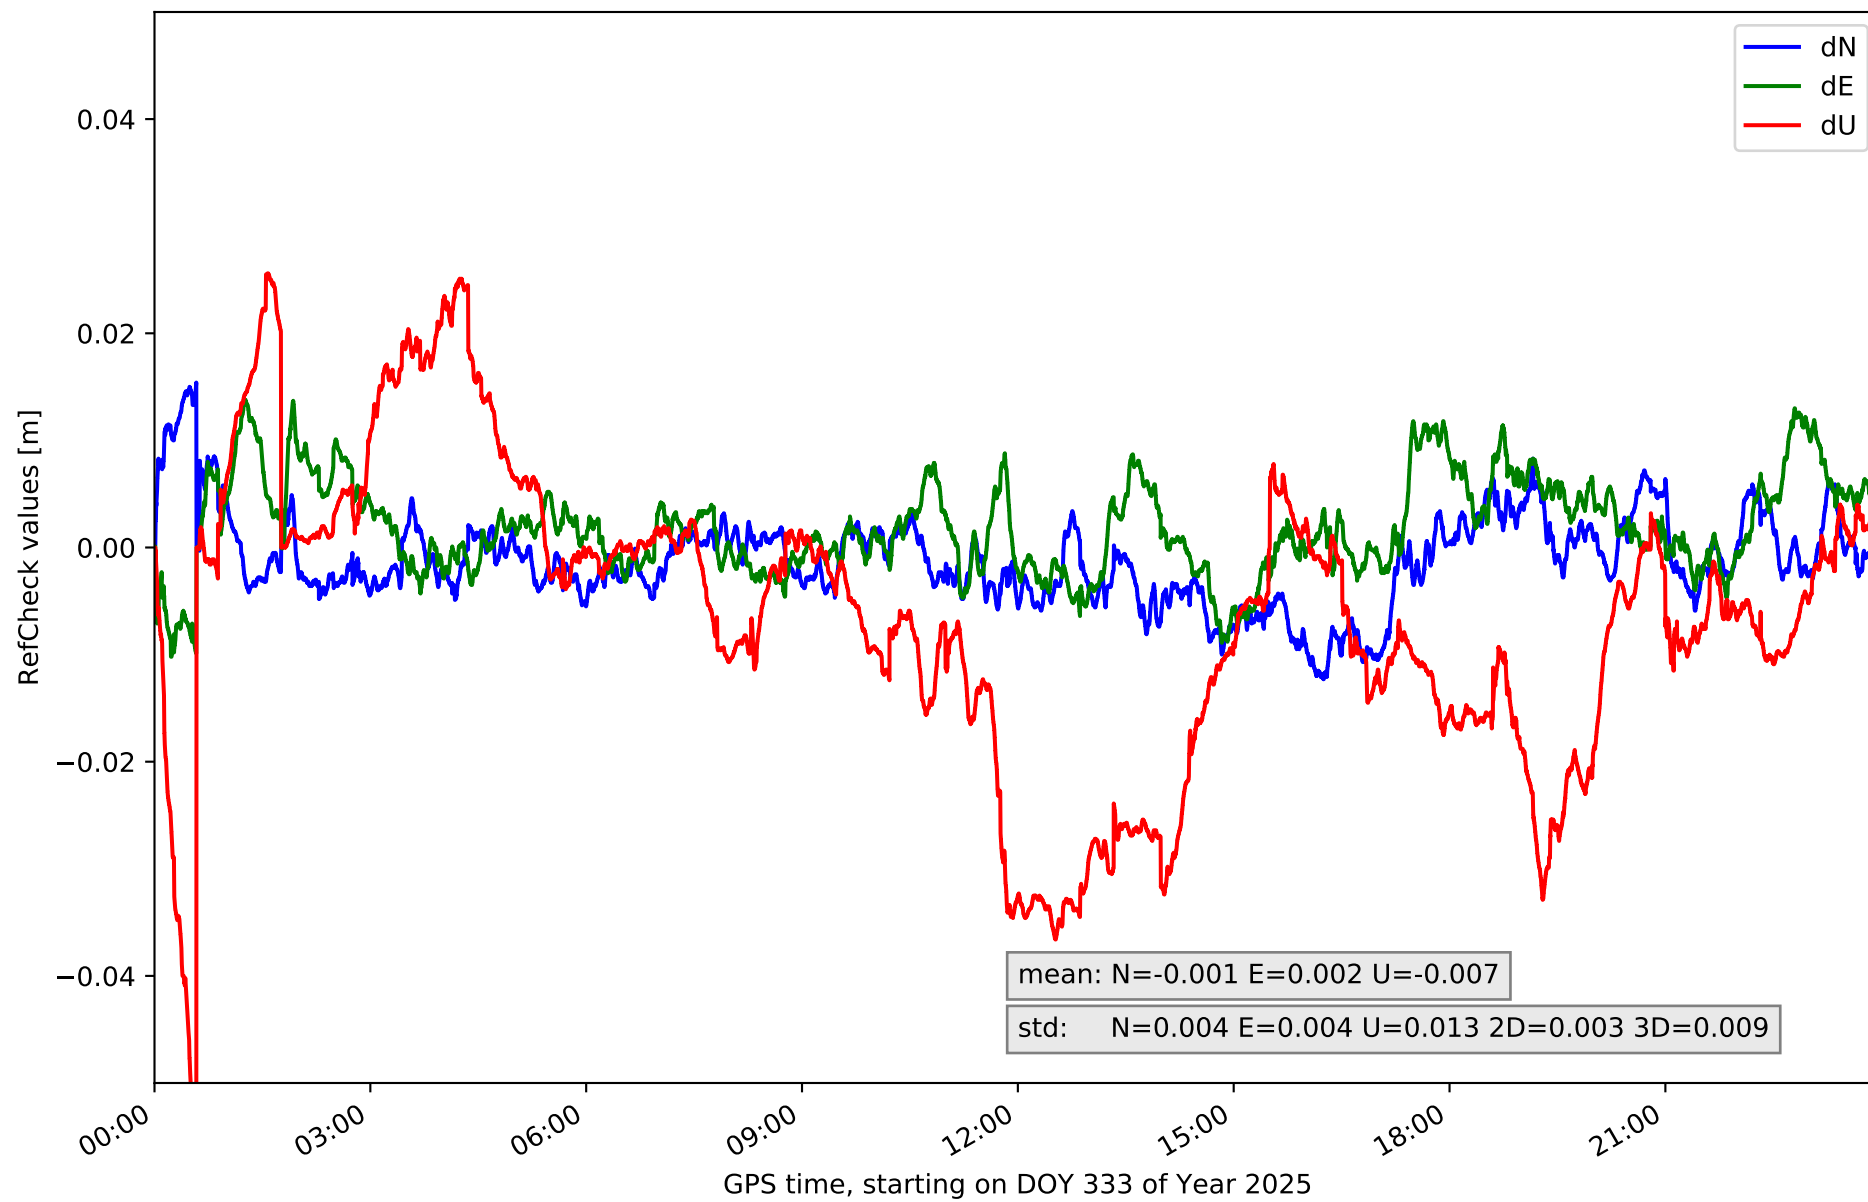


RefCheck for station LPAL in network N32T

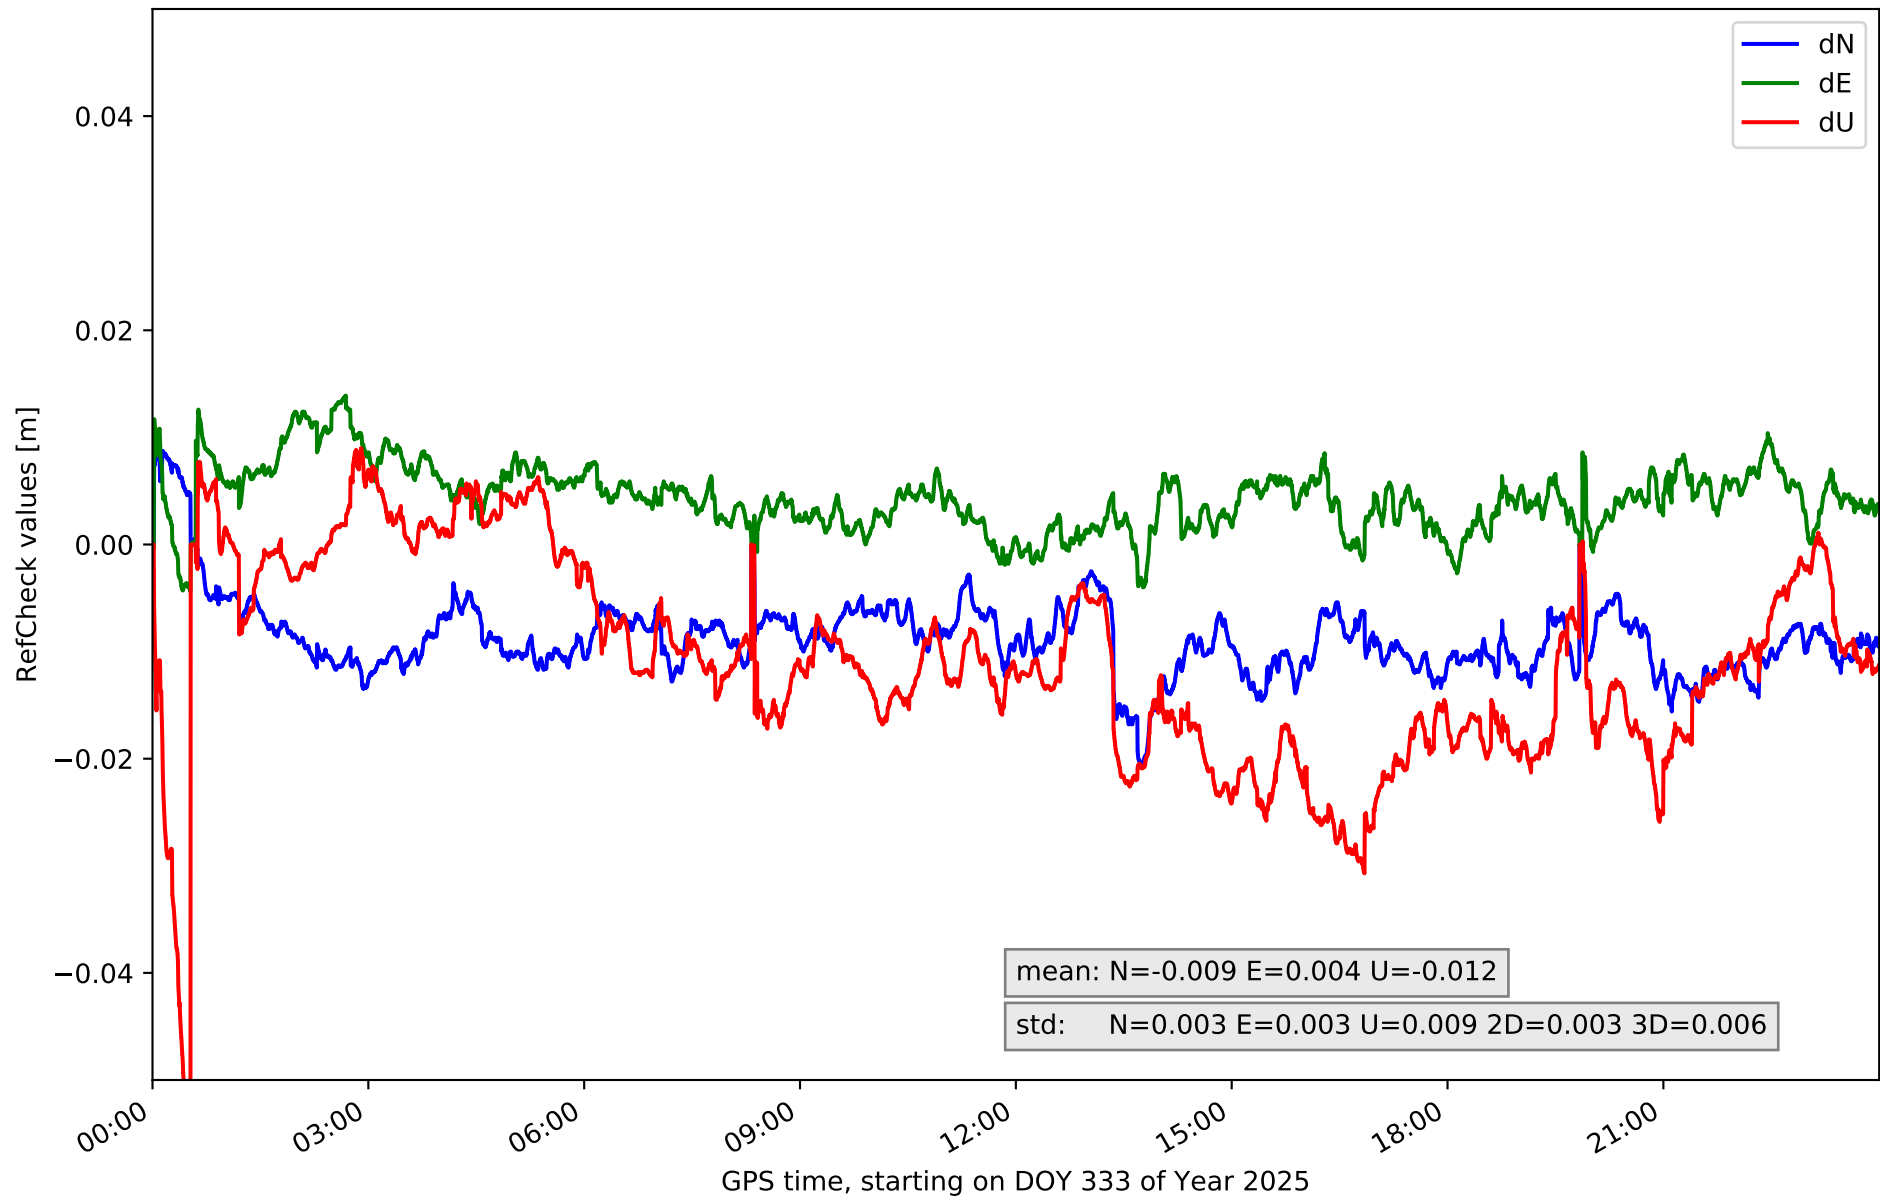


RefCheck for station LRES in network N32T

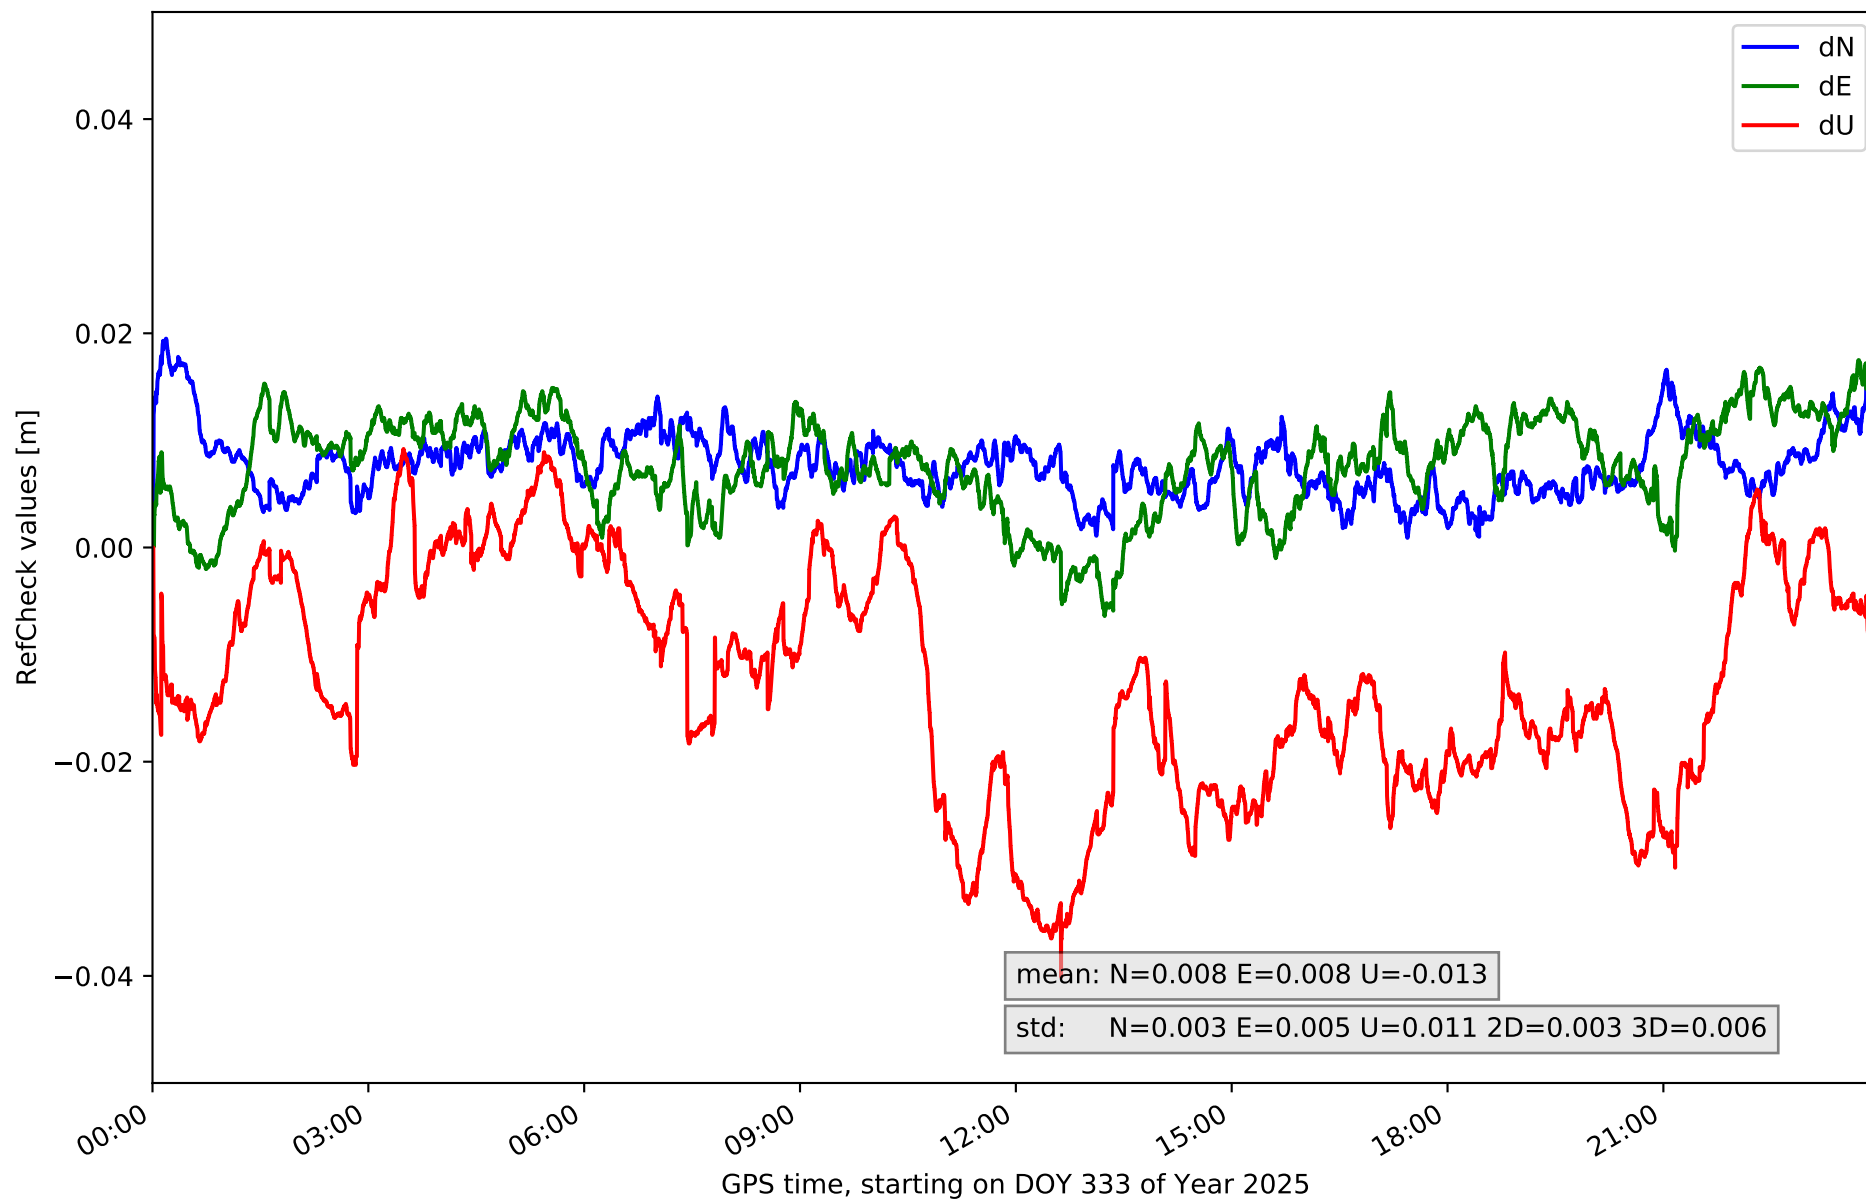


RefCheck for station TN01 in network N32T

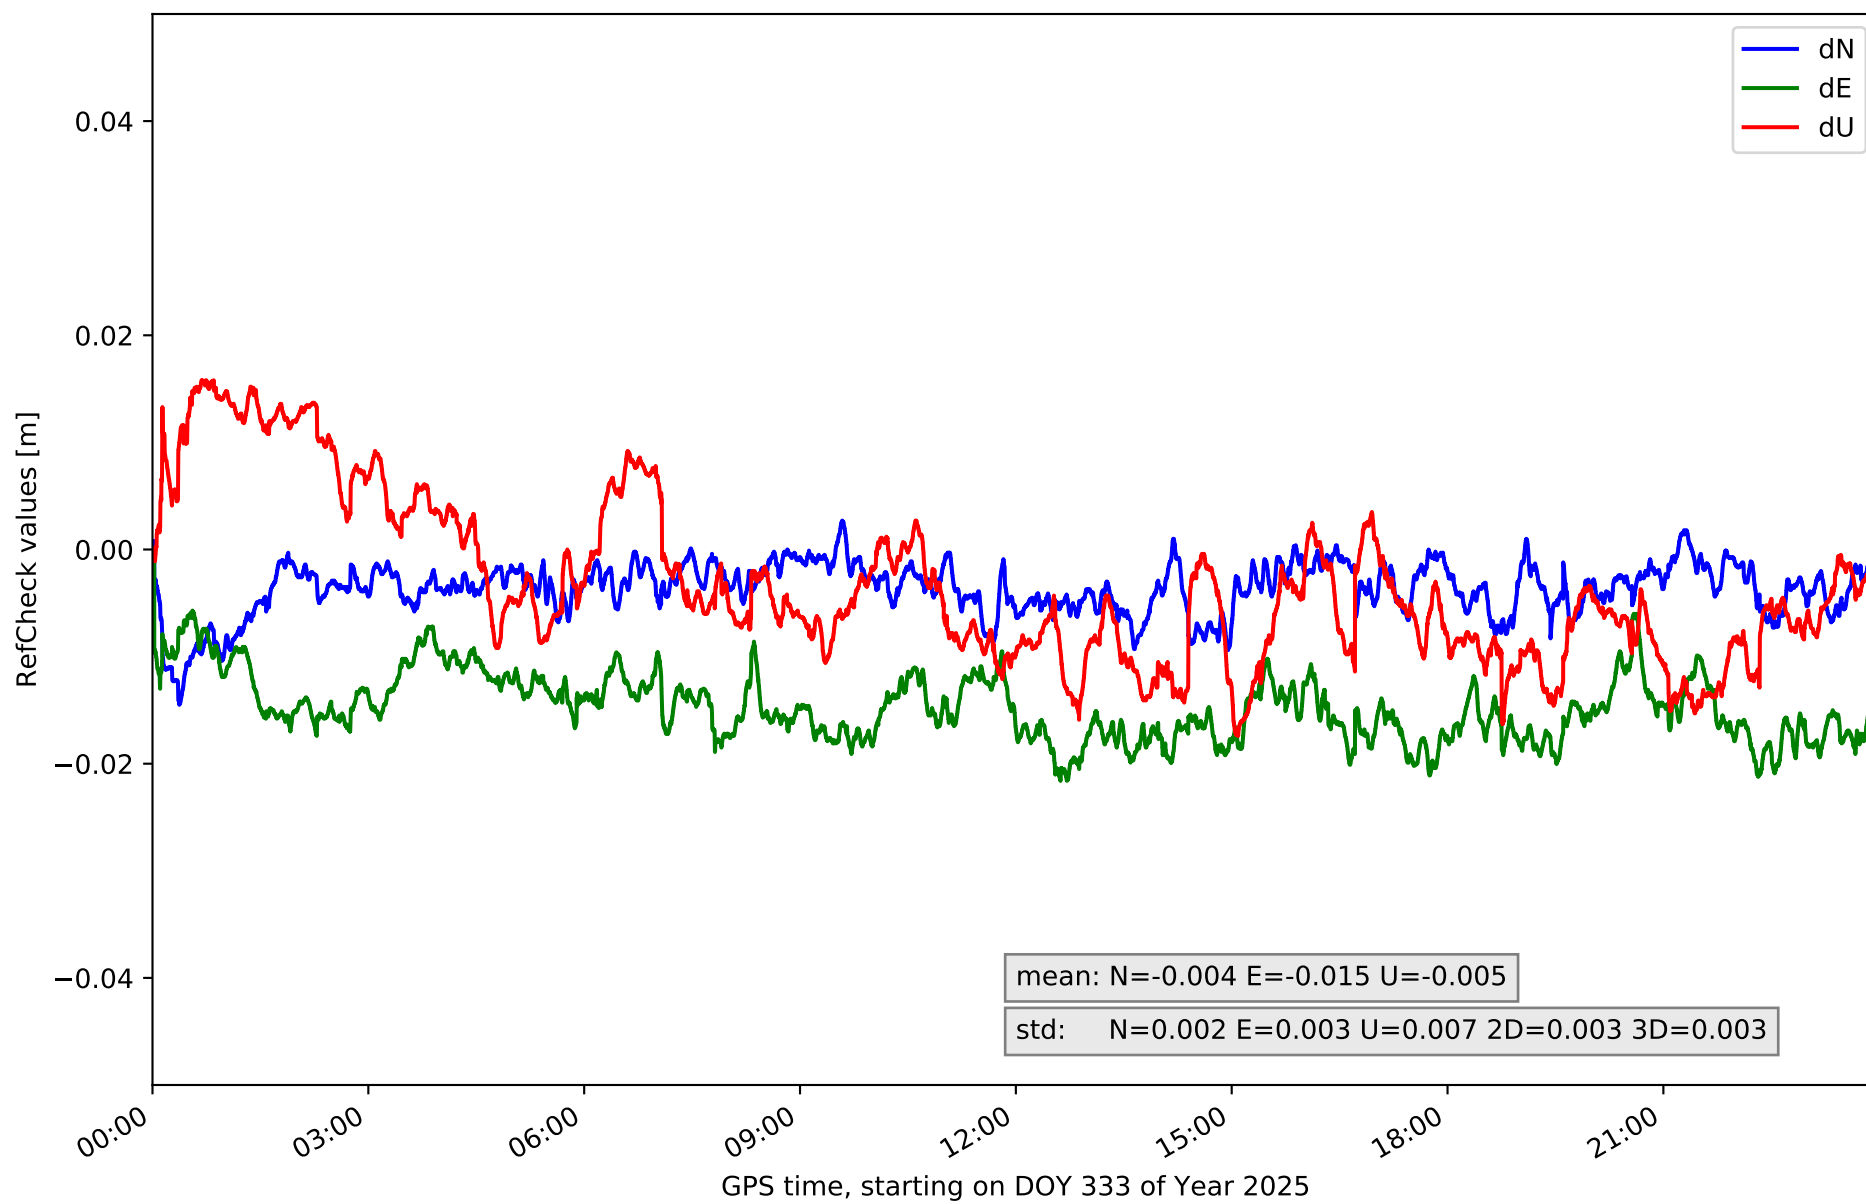


RefCheck for station TN02 in network N32T

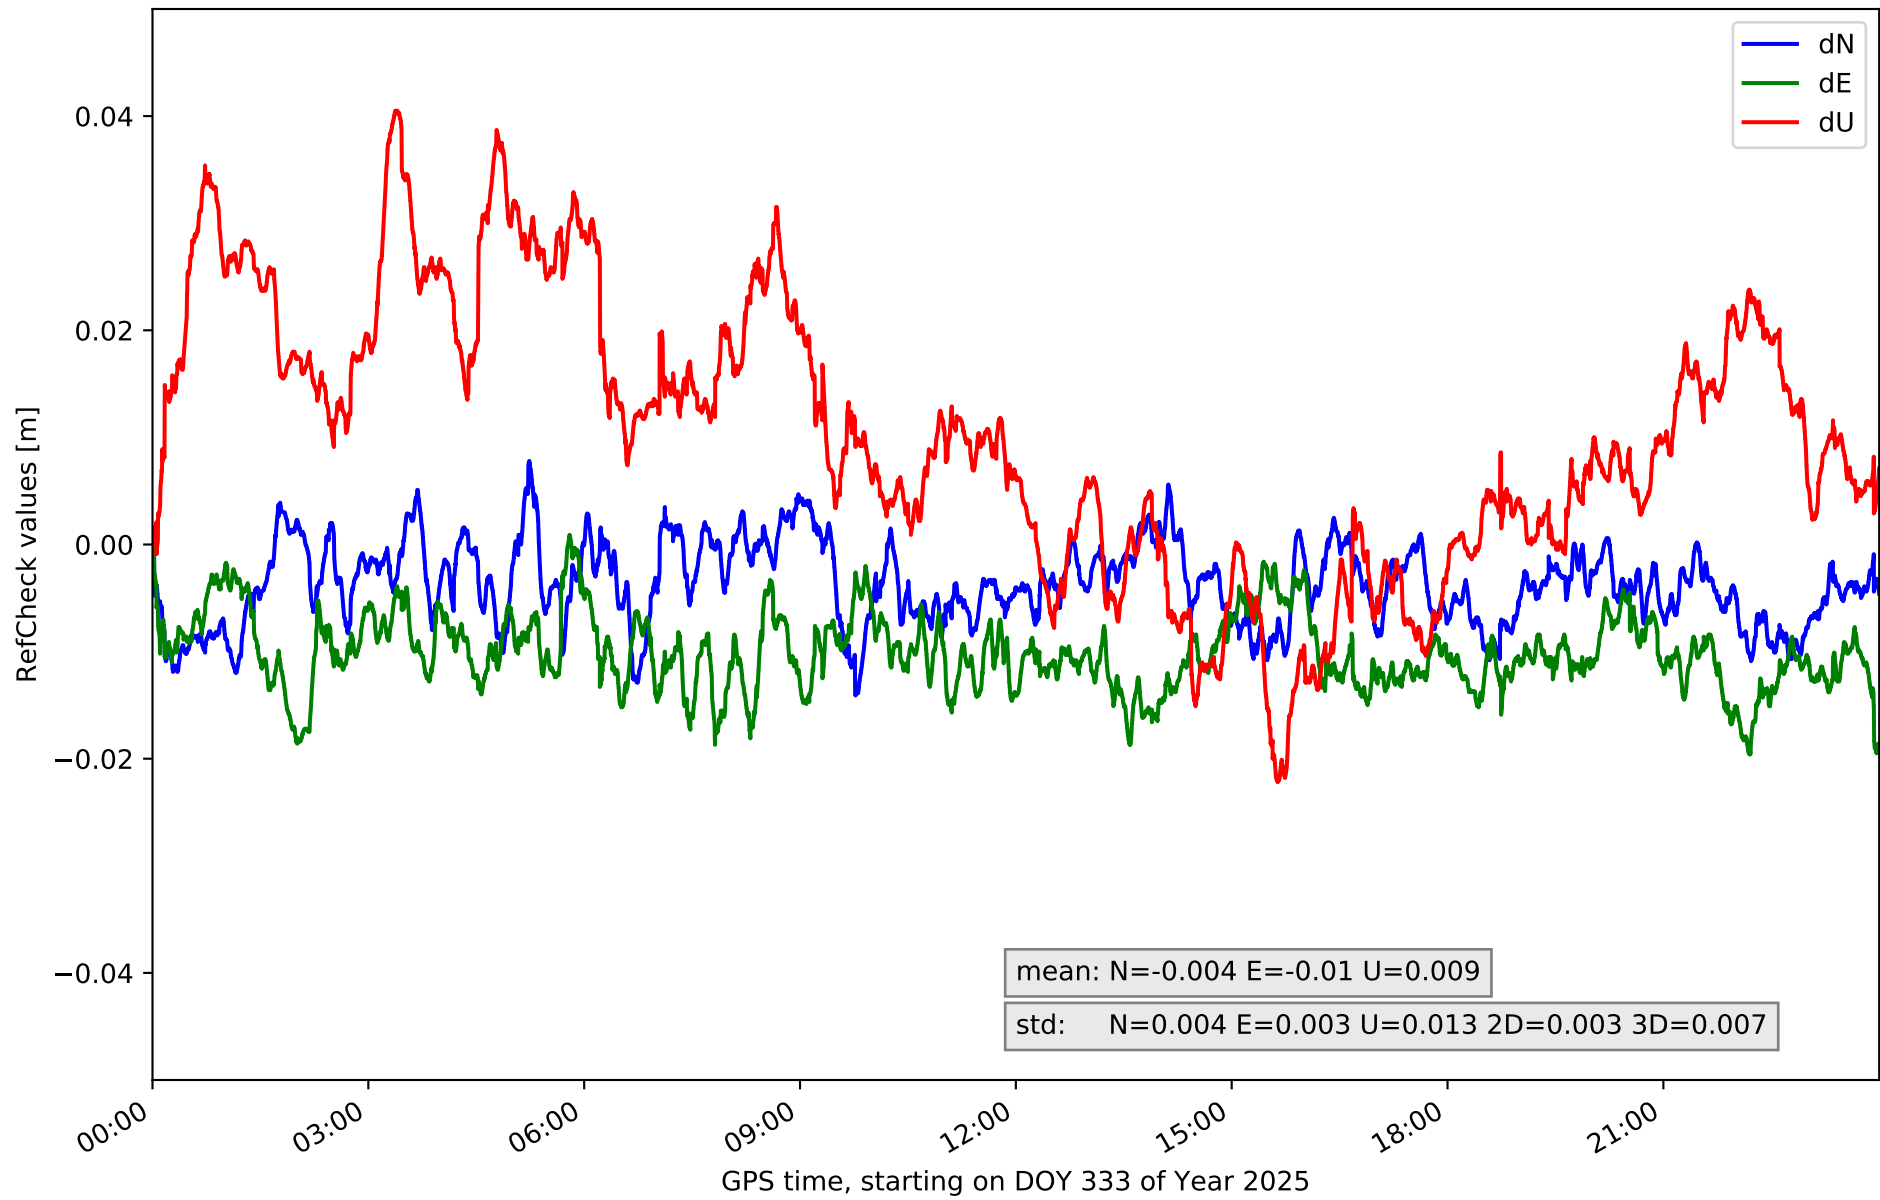


RefCheck for station TN03 in network N32T

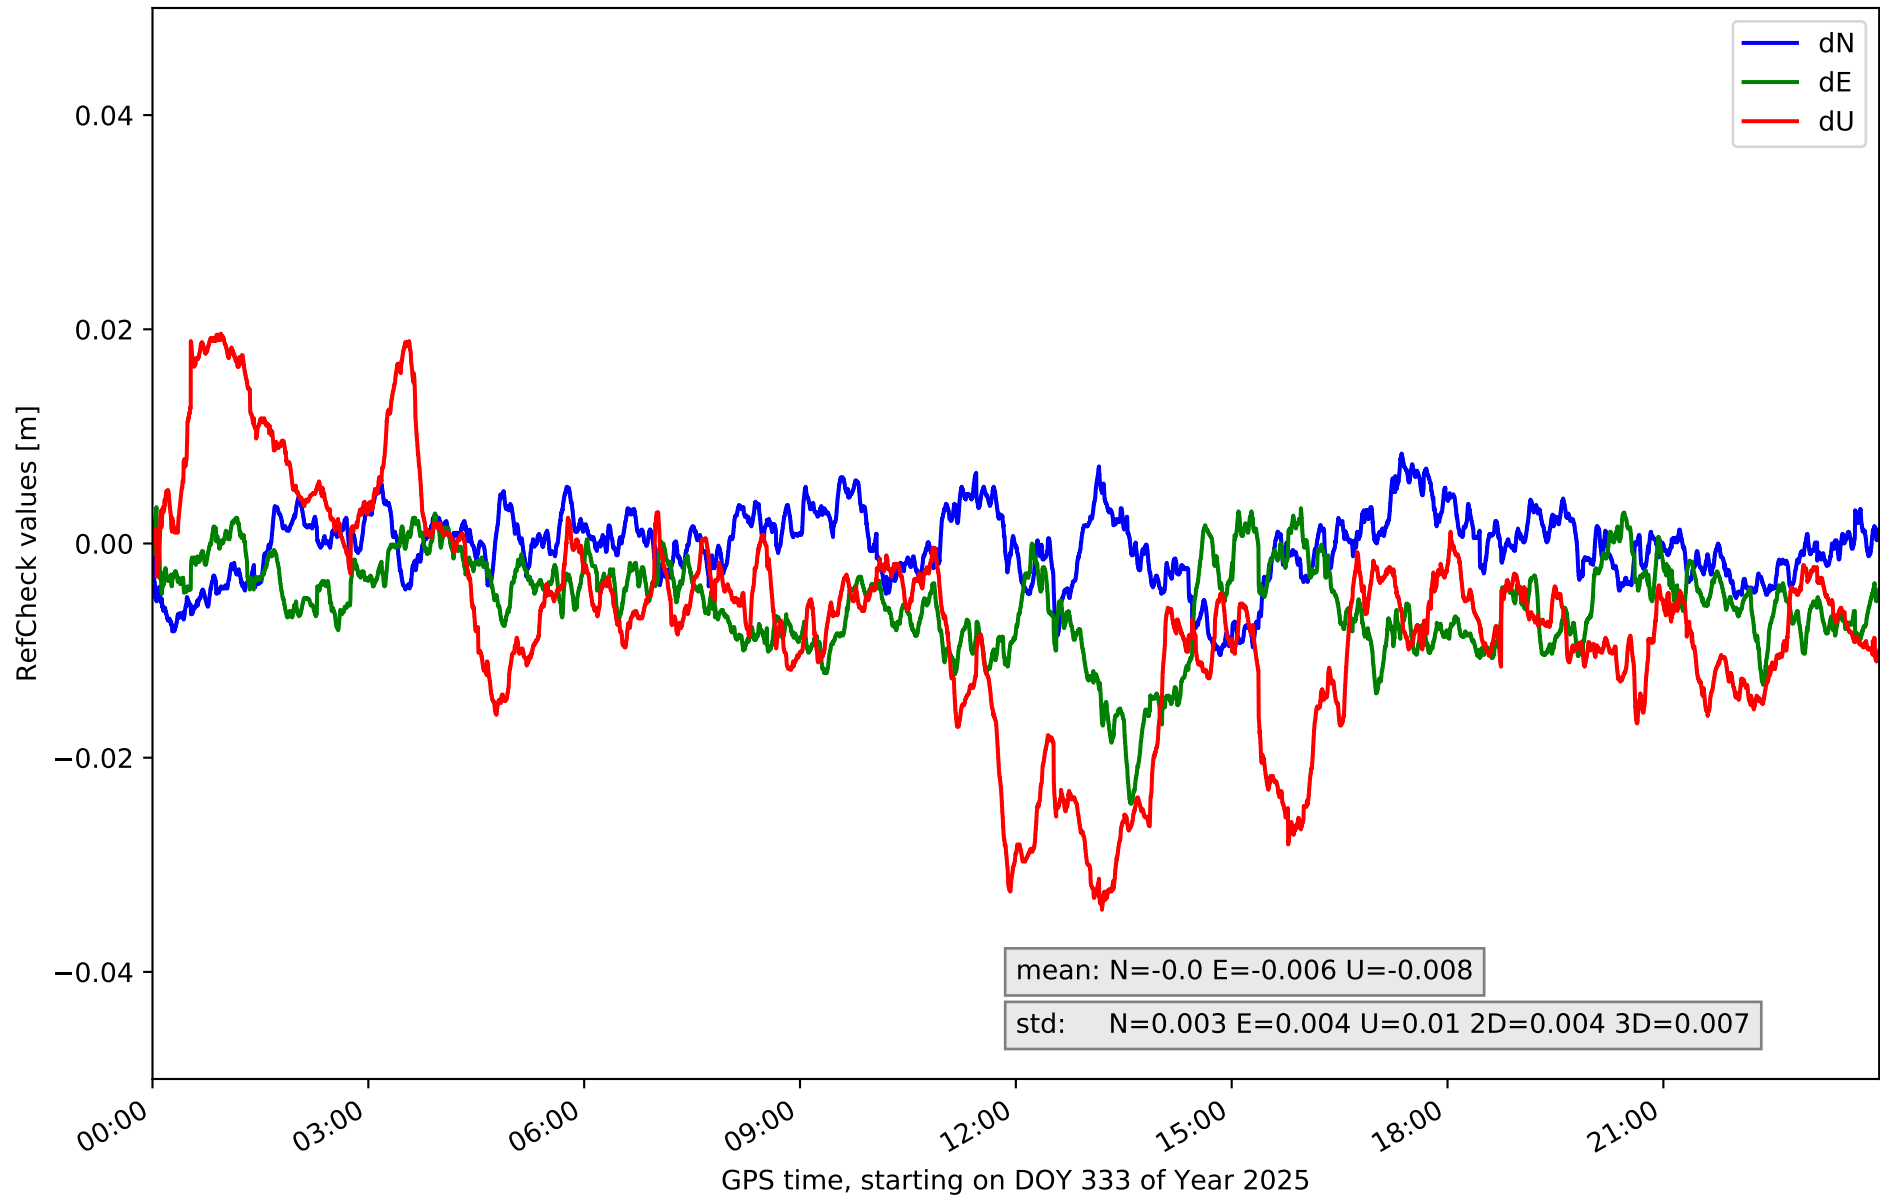


RefCheck for station TN06 in network N32T

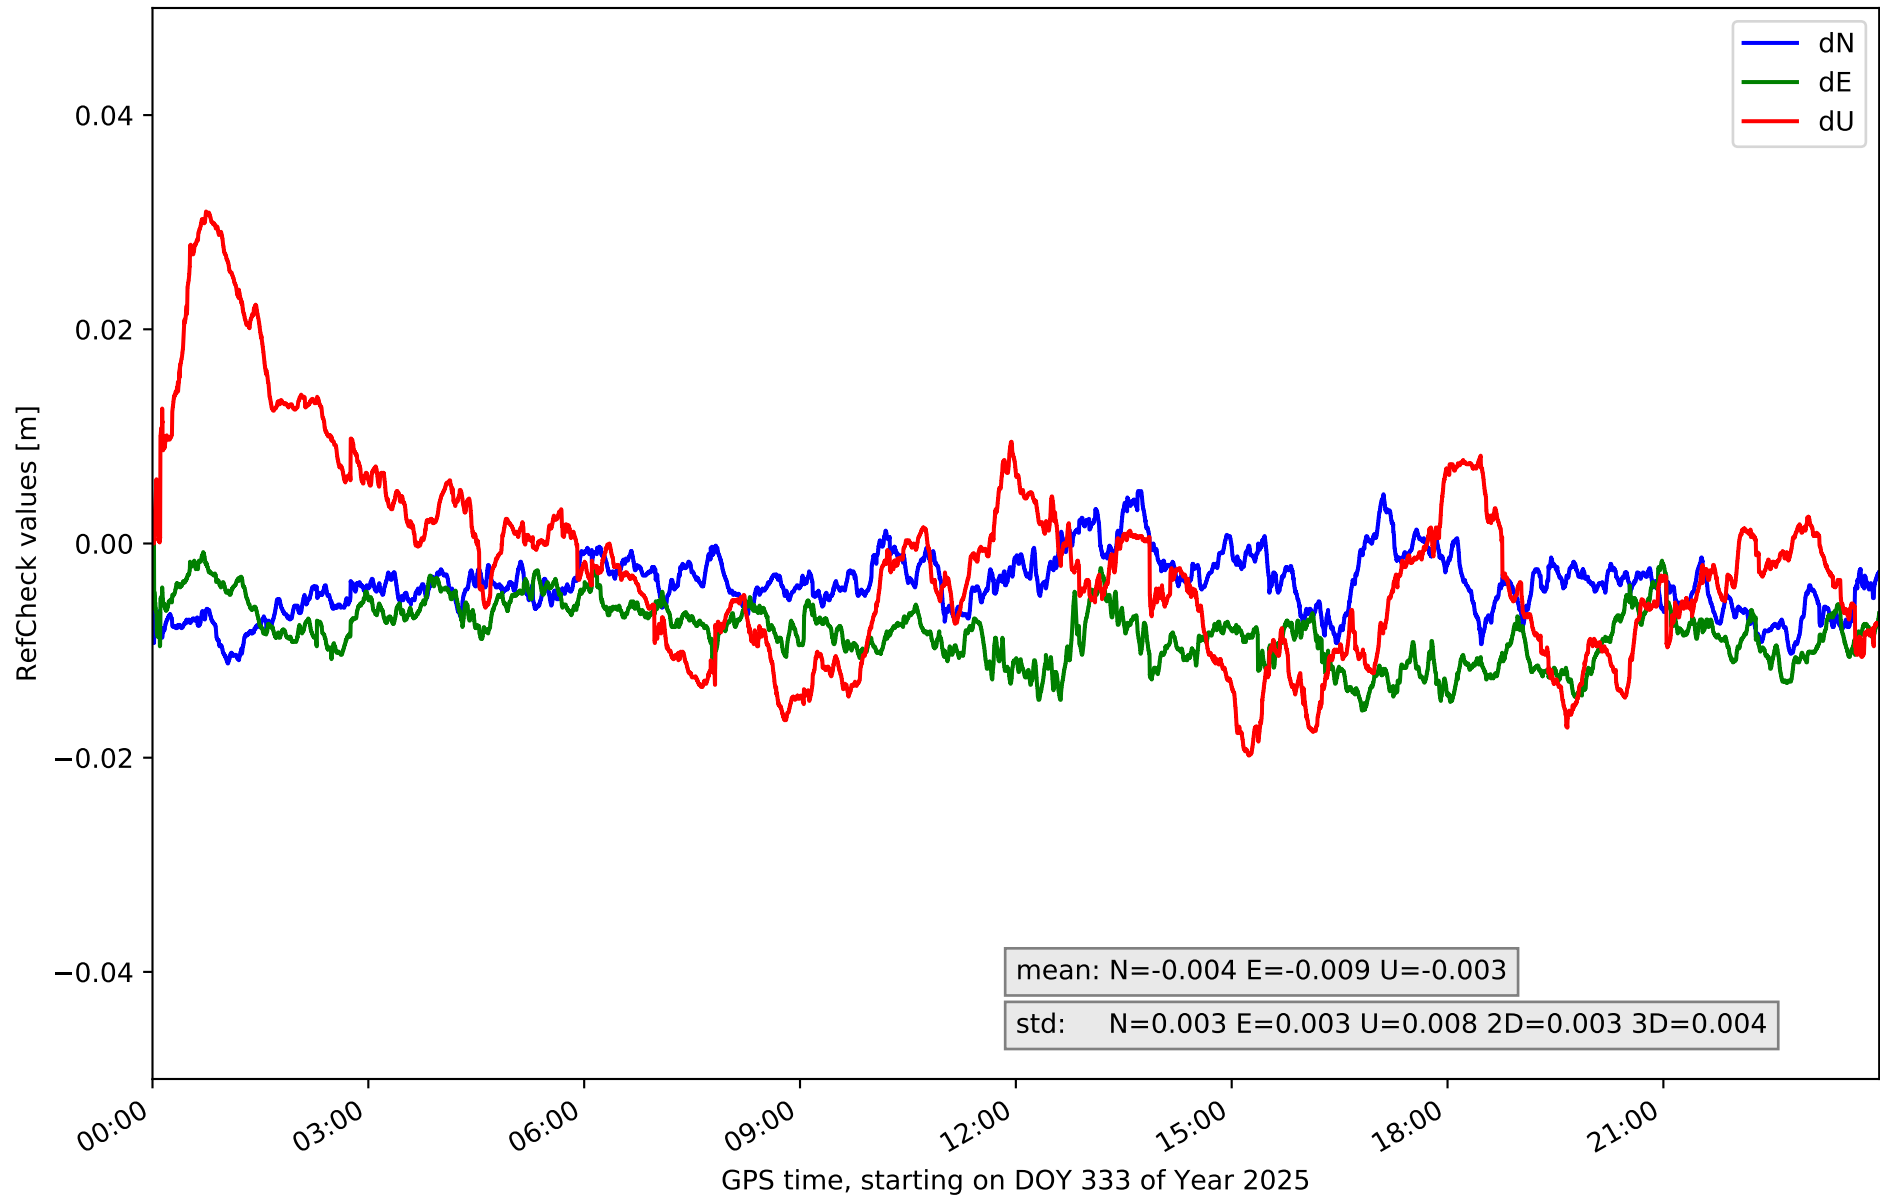

RefCheck for station TN09 in network N32T

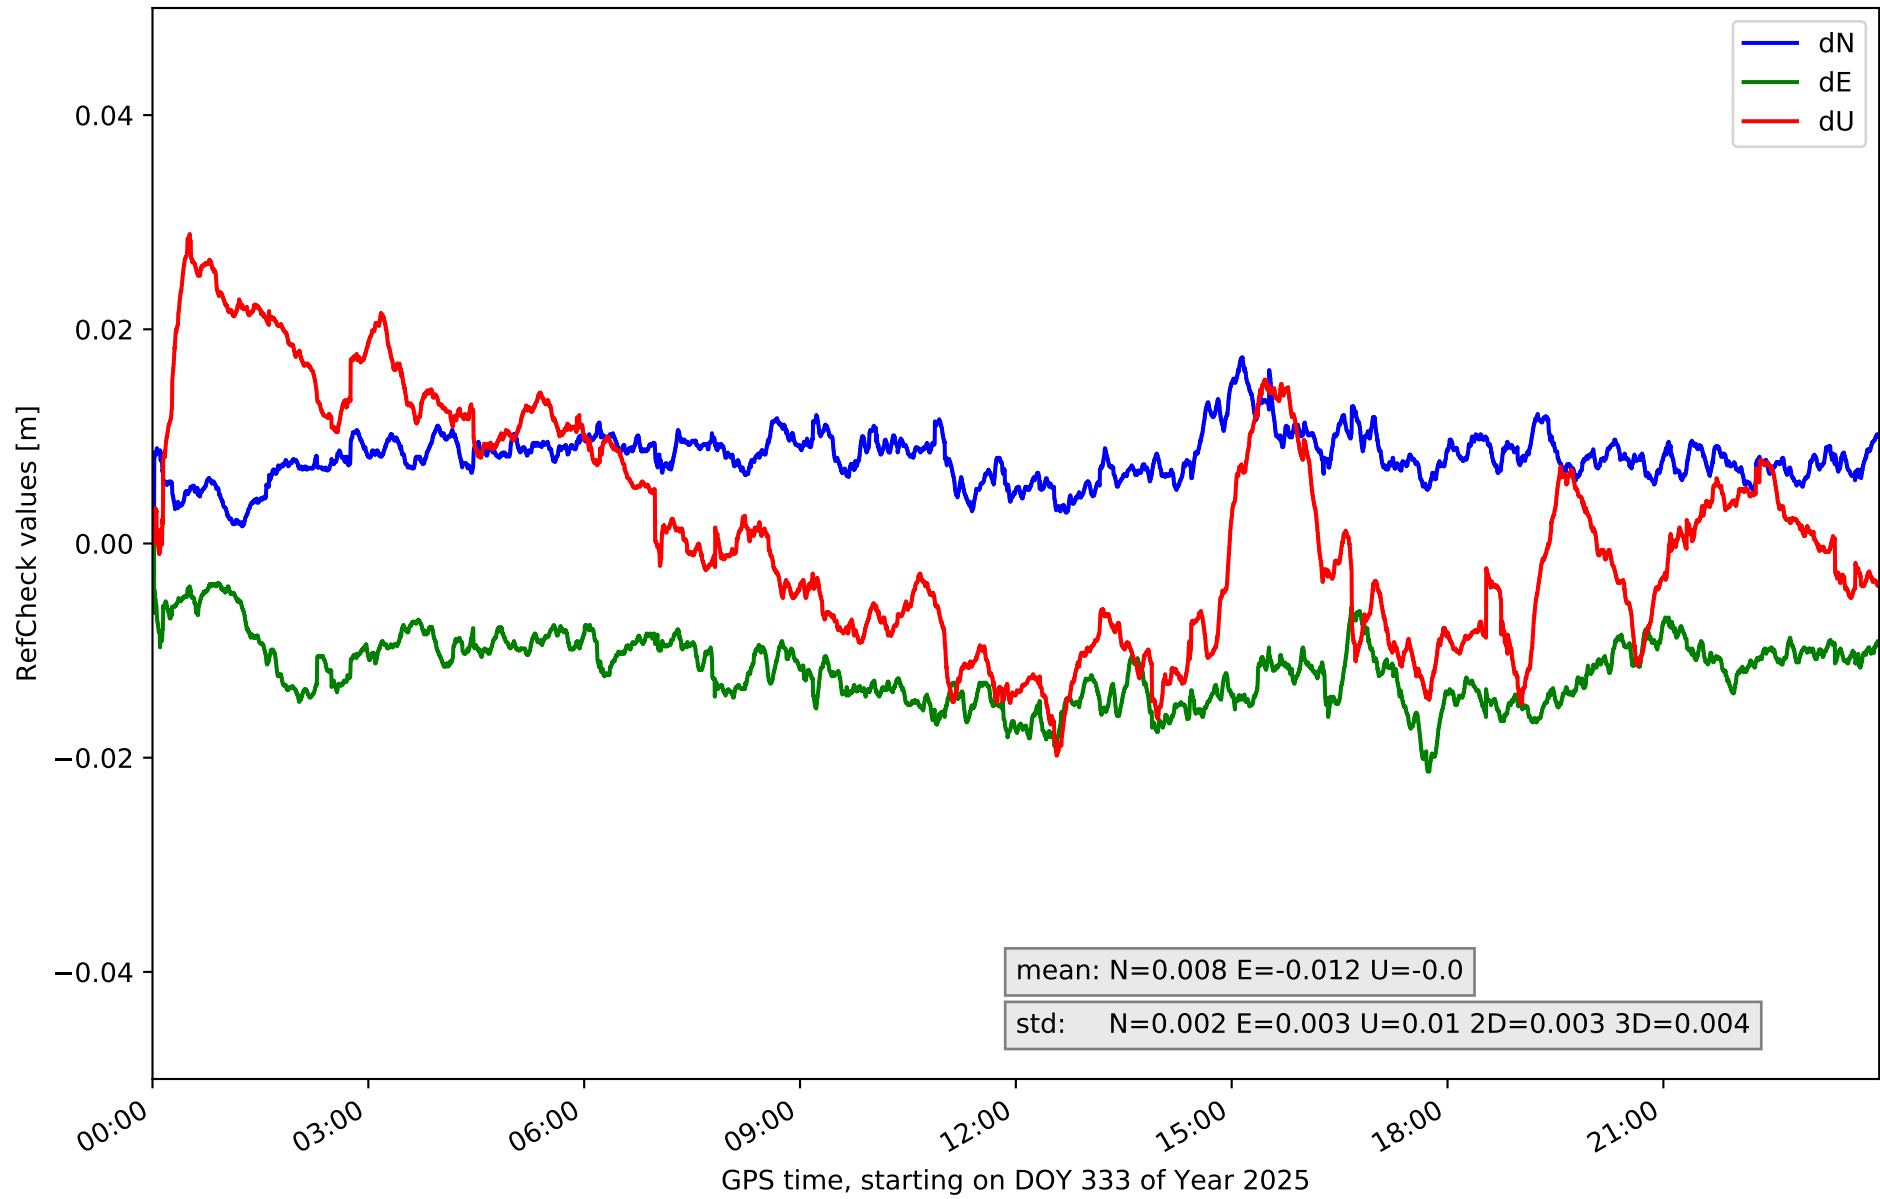

RefCheck for station TE11 in network N32T

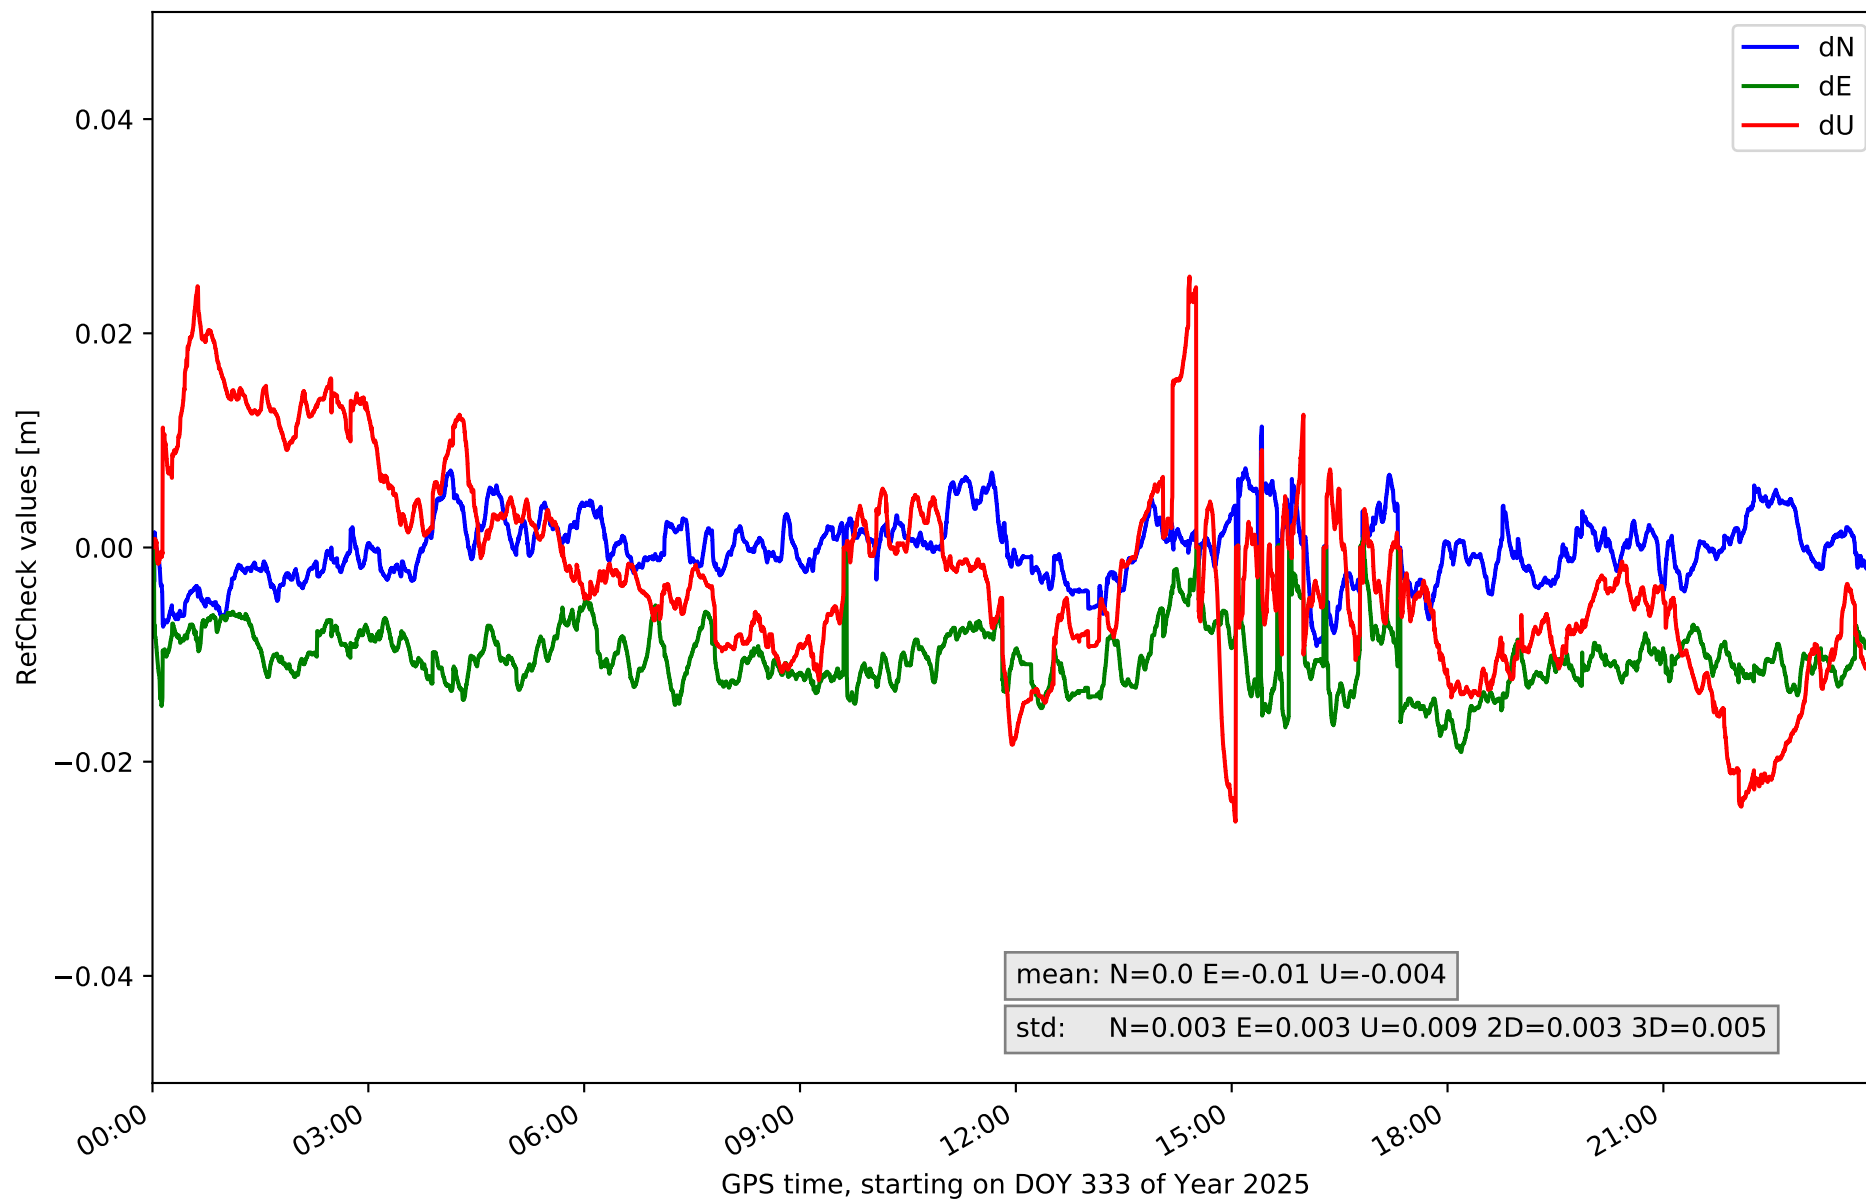

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.009	0.019	0.004	-0.004	0.025	0.005	-0.044	0.022	0.011	0.004	0.007	43419	65.7	11551	17.5
EH02	-0.02	0.022	0.006	-0.009	0.034	0.007	-0.061	0.06	0.029	0.006	0.014	60393	91.4	58327	88.3
GOM1	-0.018	0.005	0.004	-0.025	0.004	0.004	-0.033	0.033	0.011	0.005	0.006	46541	70.5	26281	39.8
GOME	-0.009	0.01	0.003	-0.016	0.008	0.004	-0.021	0.034	0.008	0.003	0.005	4182	6.3	2411	3.6
IZAN	-0.009	0.004	0.002	-0.018	0.0	0.003	-0.02	0.024	0.008	0.003	0.005	36701	55.6	8663	13.1
LP01	-0.023	0.006	0.004	-0.014	0.014	0.004	-0.05	0.024	0.011	0.003	0.006	45915	69.5	10185	15.4
LP03	-0.012	0.015	0.004	-0.01	0.014	0.004	-0.061	0.026	0.013	0.003	0.009	7266	11.0	13828	20.9
LPAL	-0.02	0.009	0.003	-0.004	0.014	0.003	-0.06	0.009	0.009	0.003	0.006	35280	53.4	20357	30.8
LRES	0.0	0.019	0.003	-0.006	0.018	0.005	-0.04	0.009	0.011	0.003	0.006	44022	66.6	29251	44.3
TN01	-0.015	0.003	0.002	-0.022	0.0	0.003	-0.017	0.016	0.007	0.003	0.003	64597	97.8	15064	22.8
TN02	-0.014	0.008	0.004	-0.02	0.001	0.003	-0.022	0.041	0.013	0.003	0.007	47080	71.3	19478	29.5
TN03	-0.01	0.008	0.003	-0.024	0.003	0.004	-0.034	0.02	0.01	0.004	0.007	11886	18.0	9267	14.0
TN06	-0.011	0.005	0.003	-0.016	0.0	0.003	-0.02	0.031	0.008	0.003	0.004	29467	44.6	3128	4.7
TN09	0.0	0.017	0.002	-0.021	0.0	0.003	-0.02	0.029	0.01	0.003	0.004	63907	96.7	17376	26.3
TE11	-0.009	0.011	0.003	-0.019	0.001	0.003	-0.026	0.025	0.009	0.003	0.005	42581	64.5	6712	10.2
Mean	-0.012	0.011	0.003	-0.015	0.009	0.004	-0.035	0.027	0.011	0.003	0.006	38882.5	58.9	16791.9	25.4
Min/Max	-0.023	0.022	0.006	-0.025	0.034	0.007	-0.061	0.06	0.029	0.006	0.014	64597	97.8	58327	88.3

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	93.3	93.2	91.1	94.6	93.3
considering satellites with dual-frequency fixed	90.0	91.2	83.0	92.8	91.0
considering all signals separately	90.4	91.1	83.0	93.2	90.5