

summary for network N32T

timeperiod chosen: from 2025-11-30-00:00:00 until 2025-11-30-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.4 seconds


average fixing percentage with threshold set to 0.3: 93.6 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

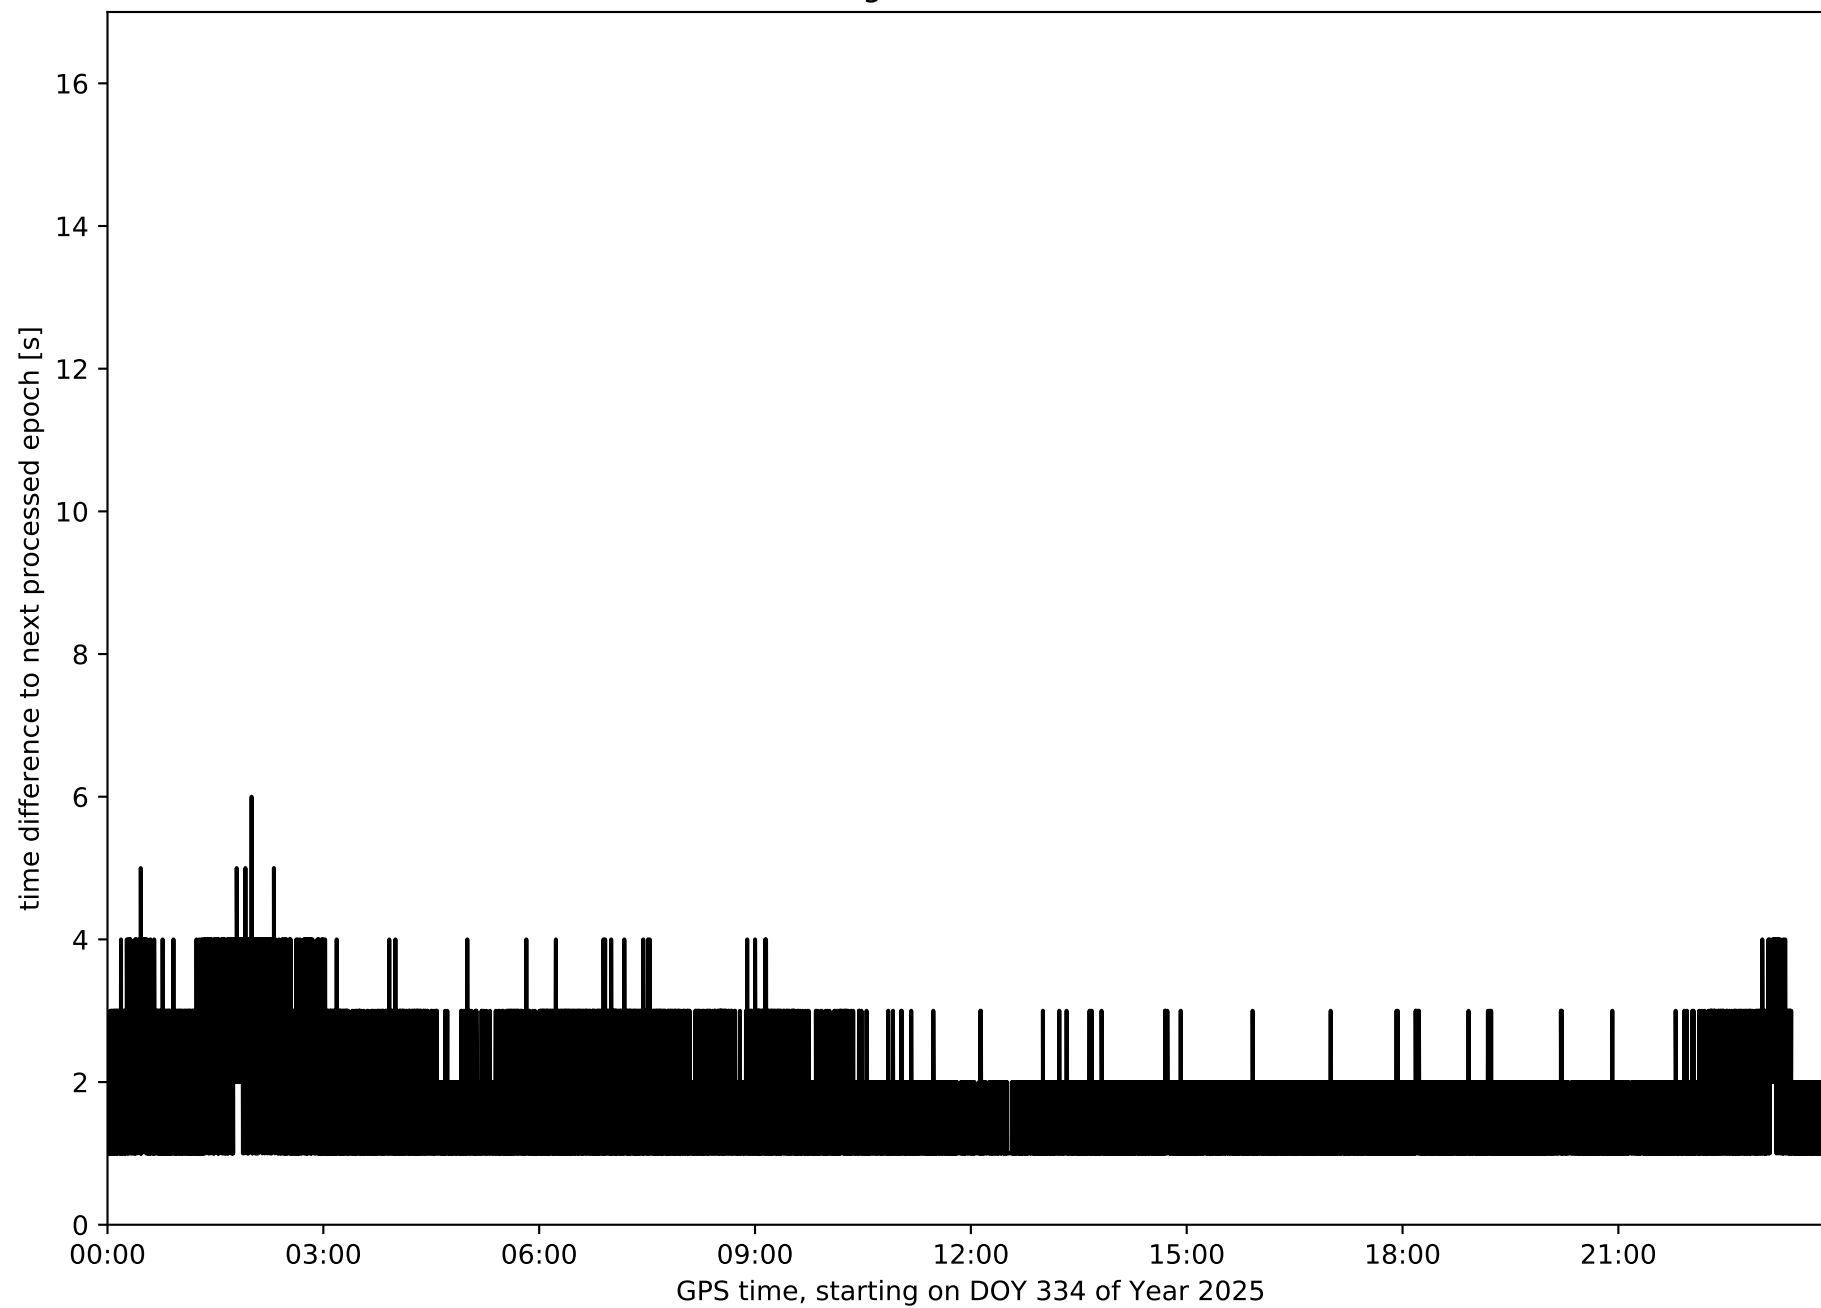


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

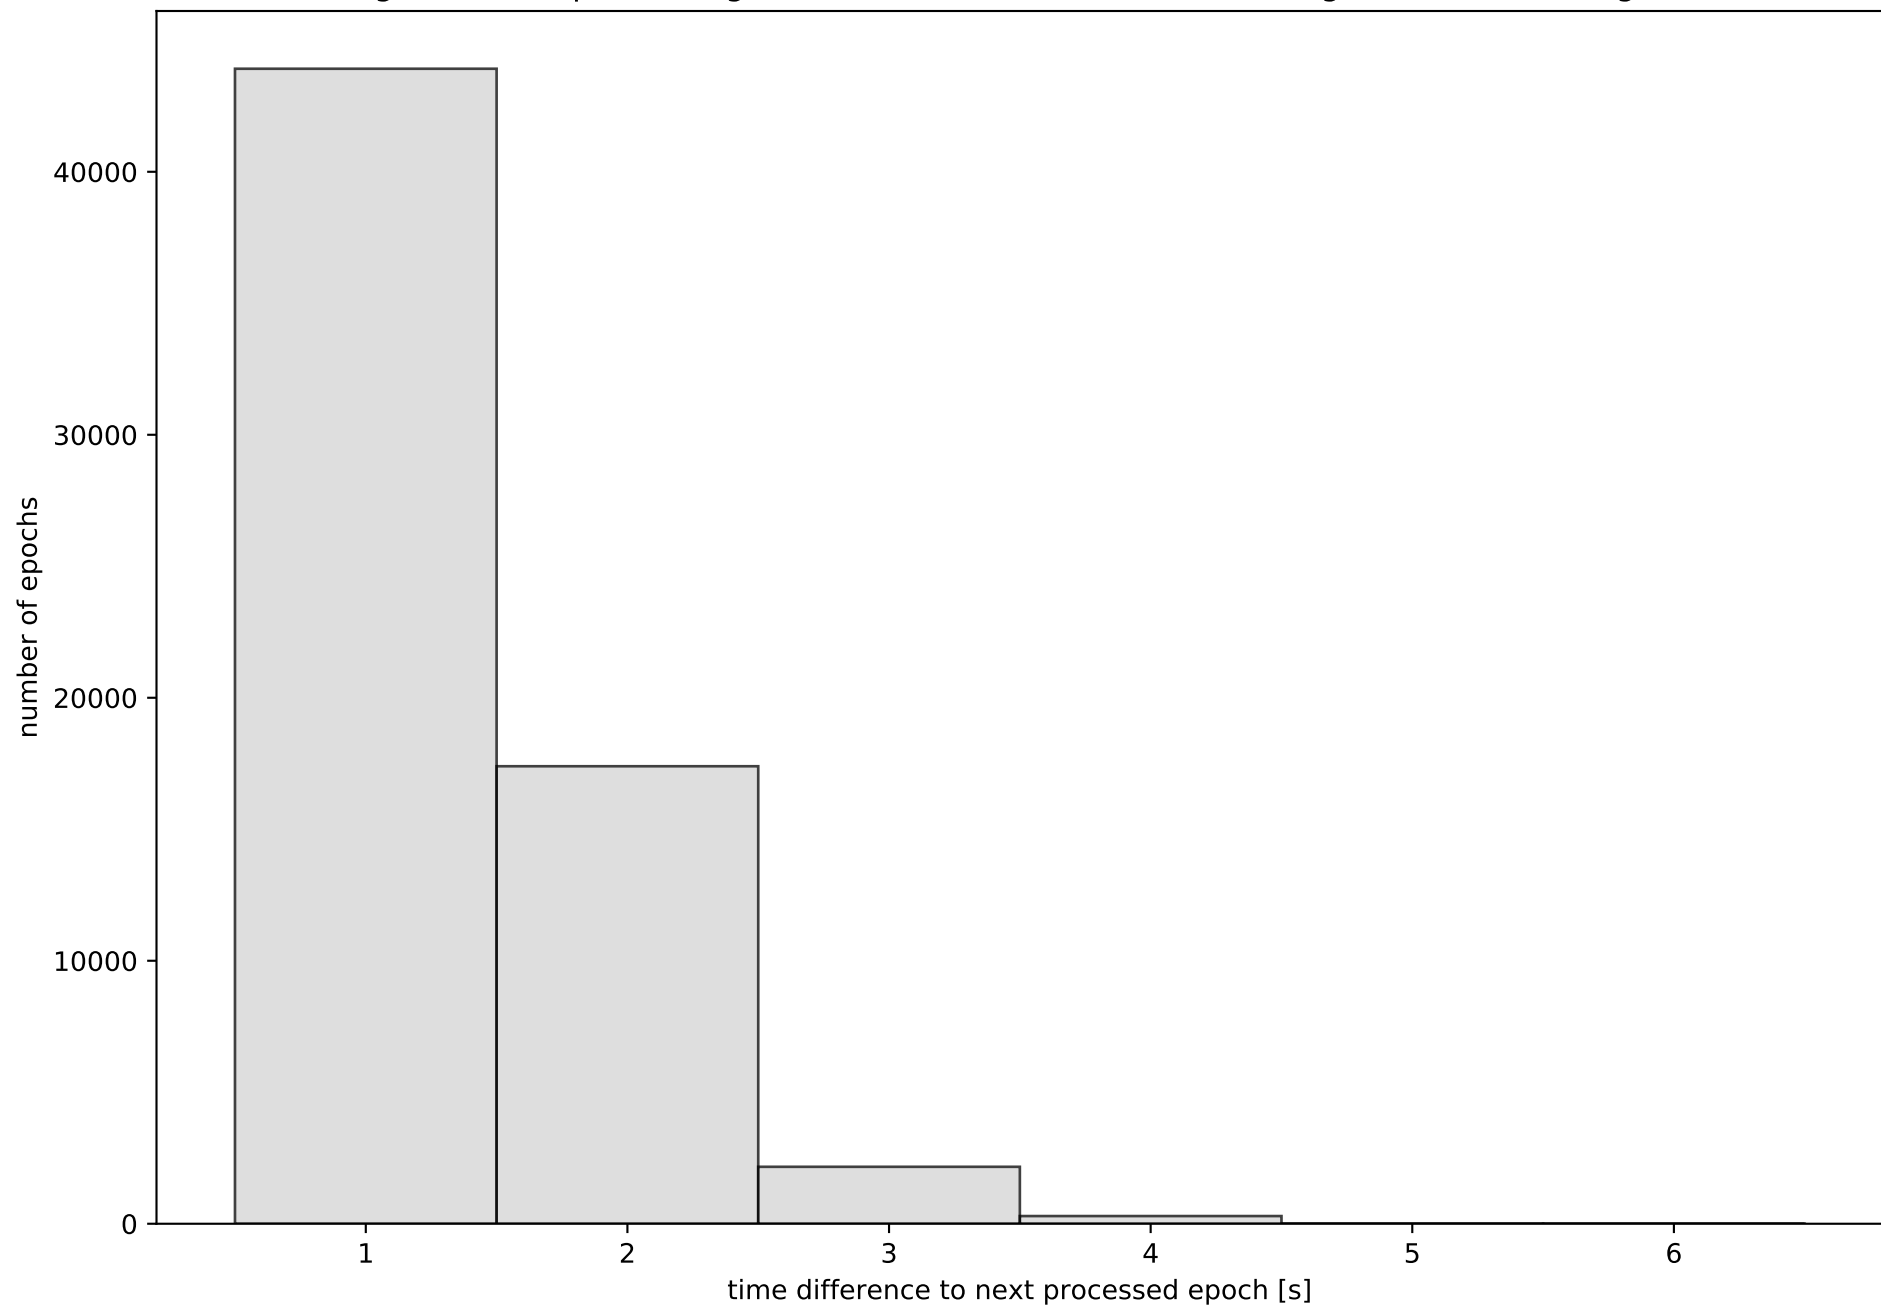


Network N32T with threshold set to 0.3

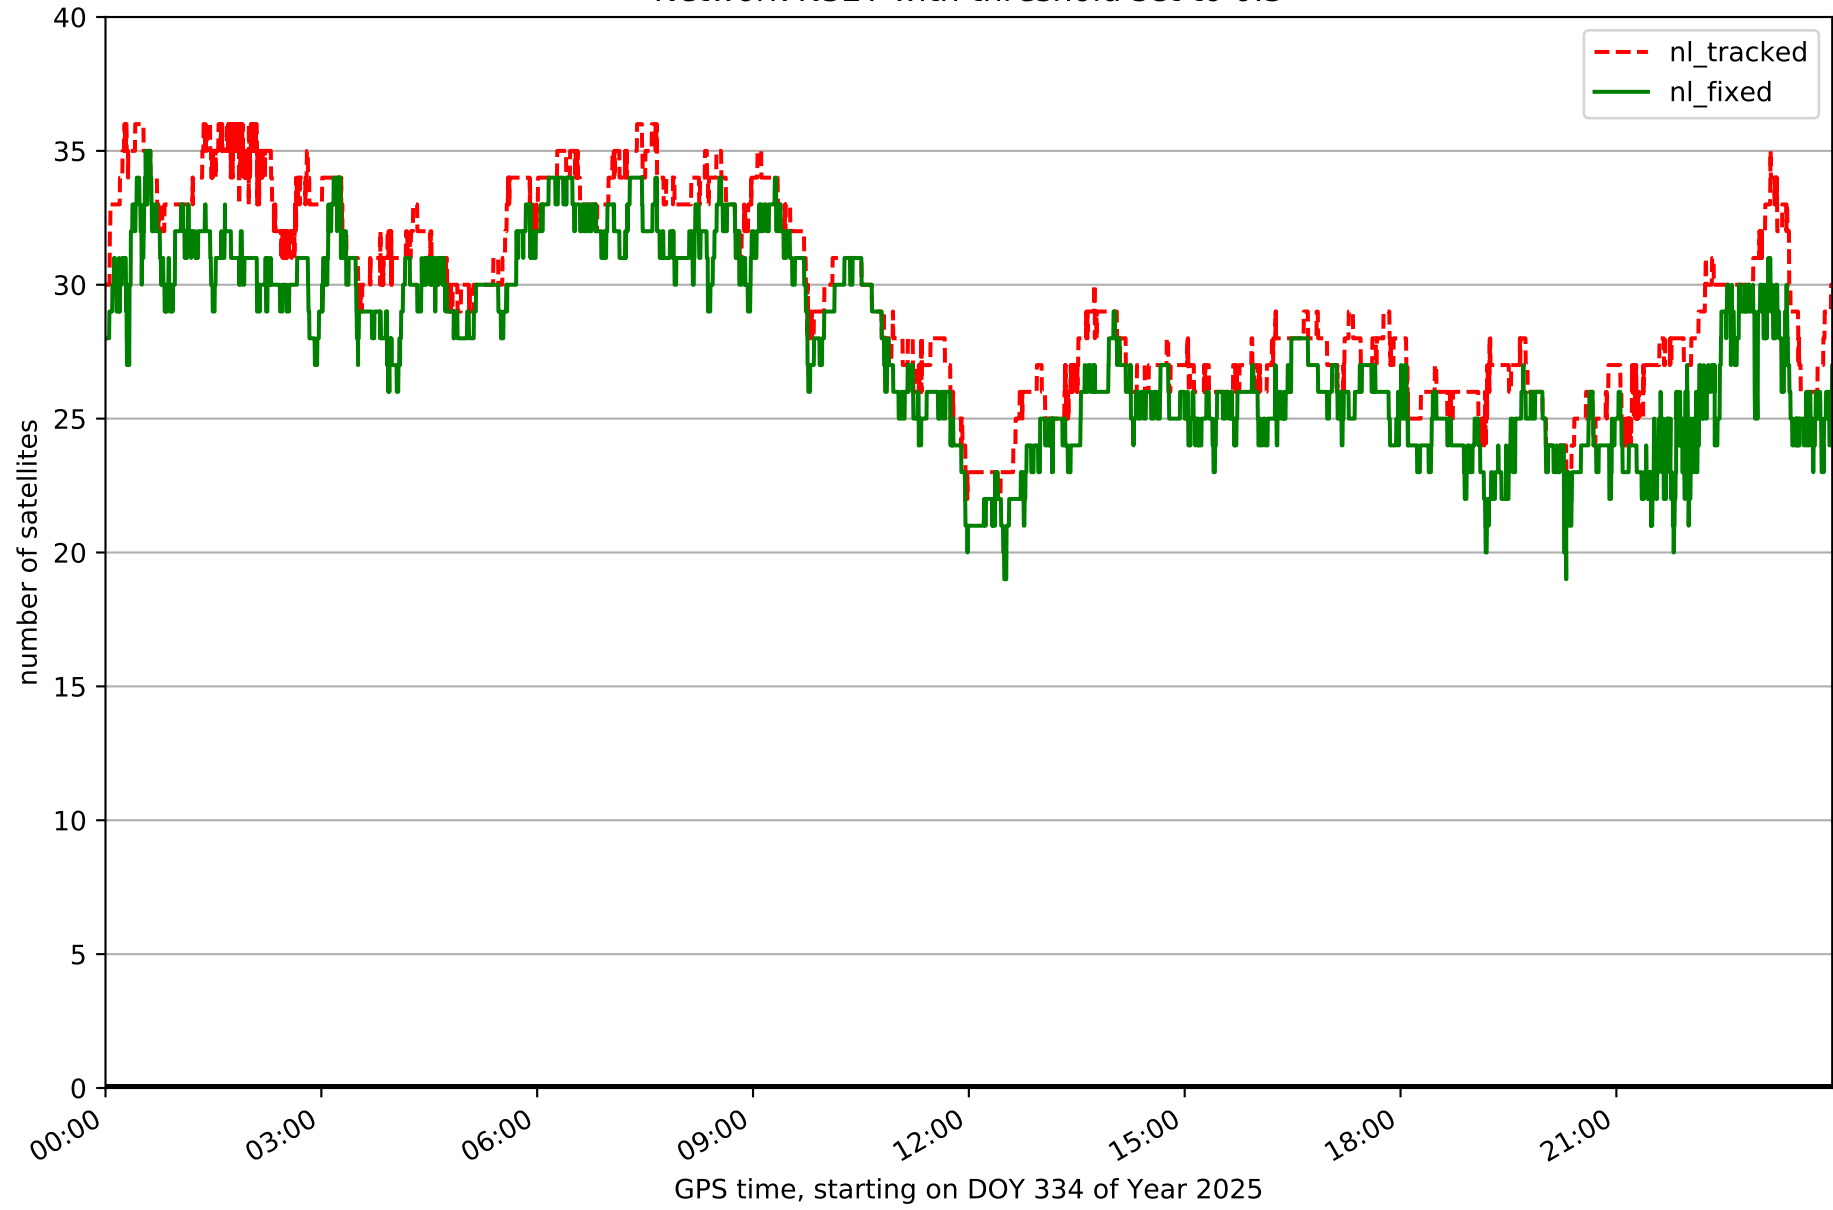


Fixing percentage of satellites in network N32T with threshold set to 0.3

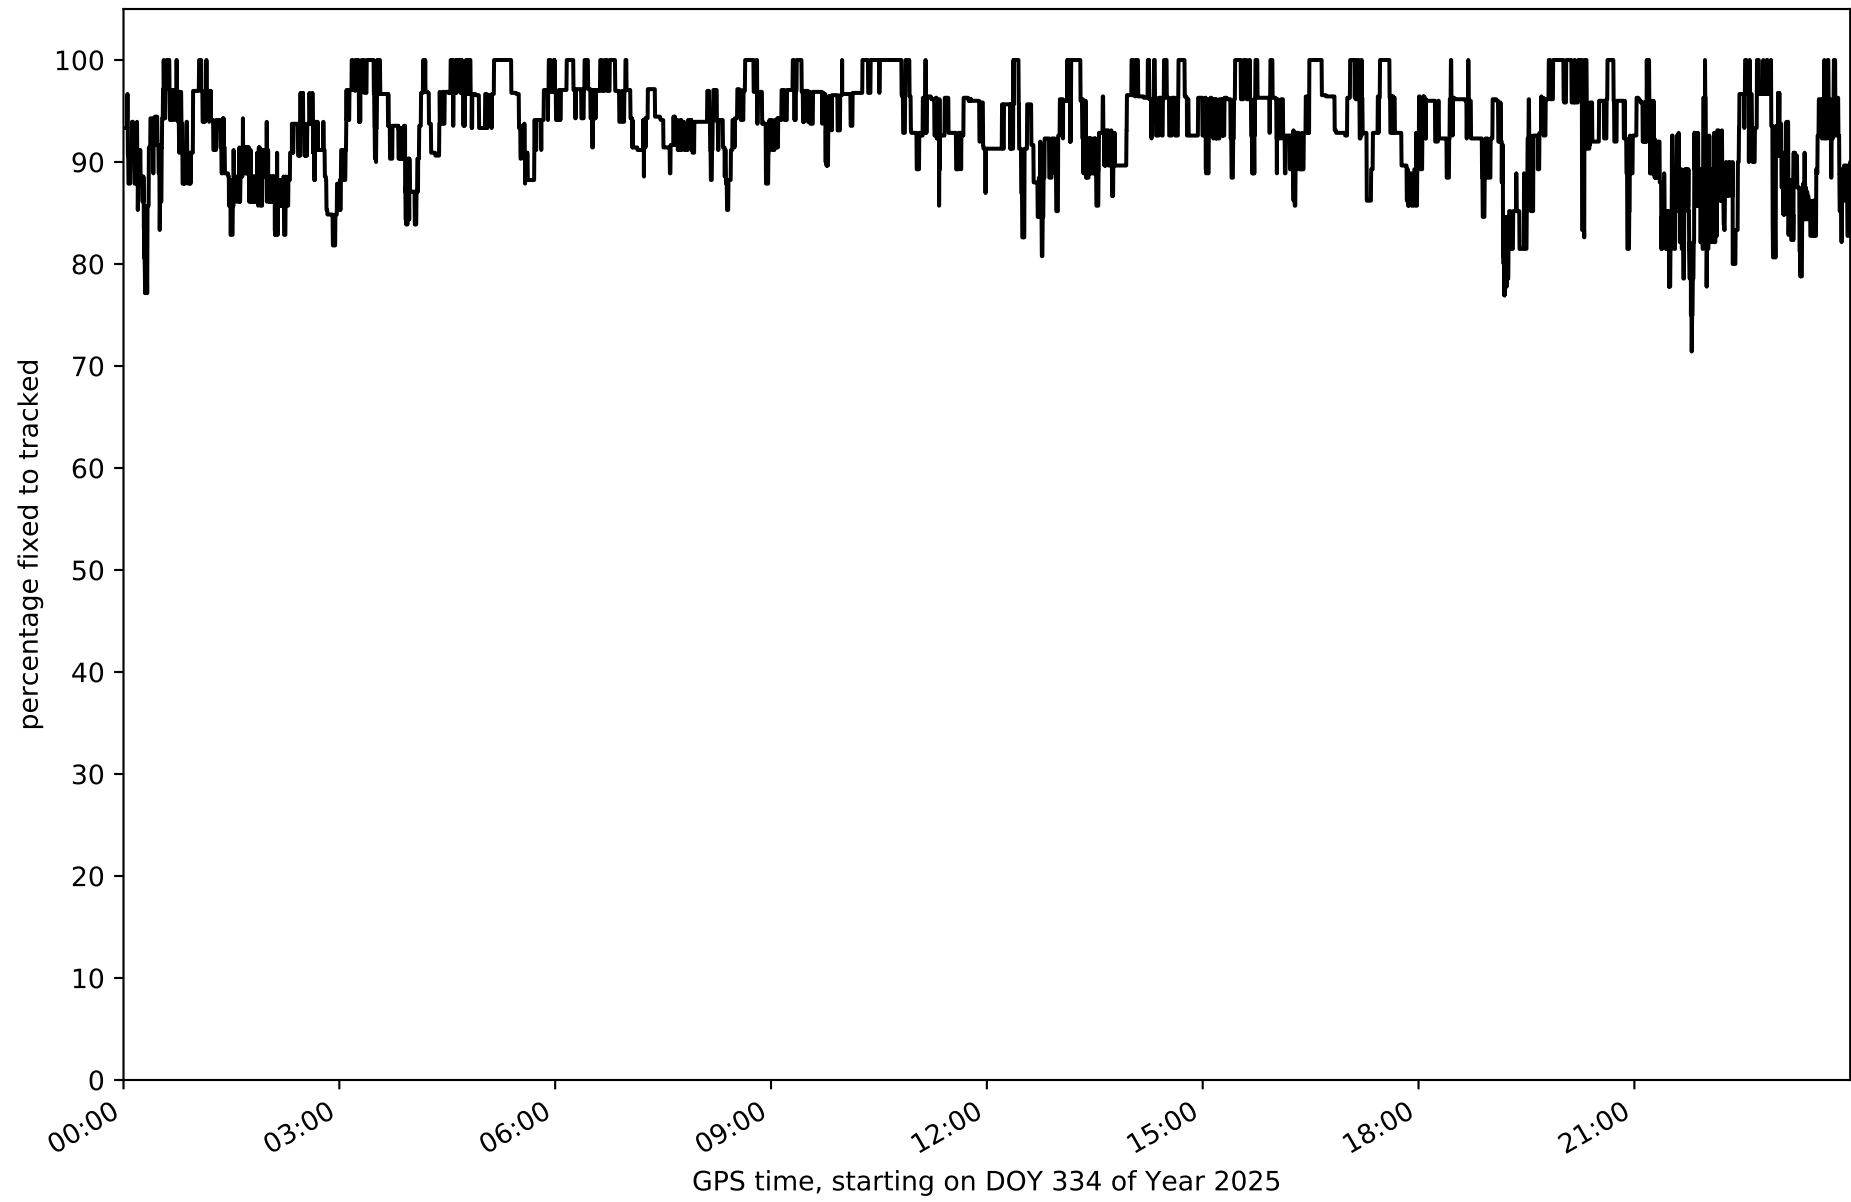


Network N32T - only GPS with threshold set to 0.3

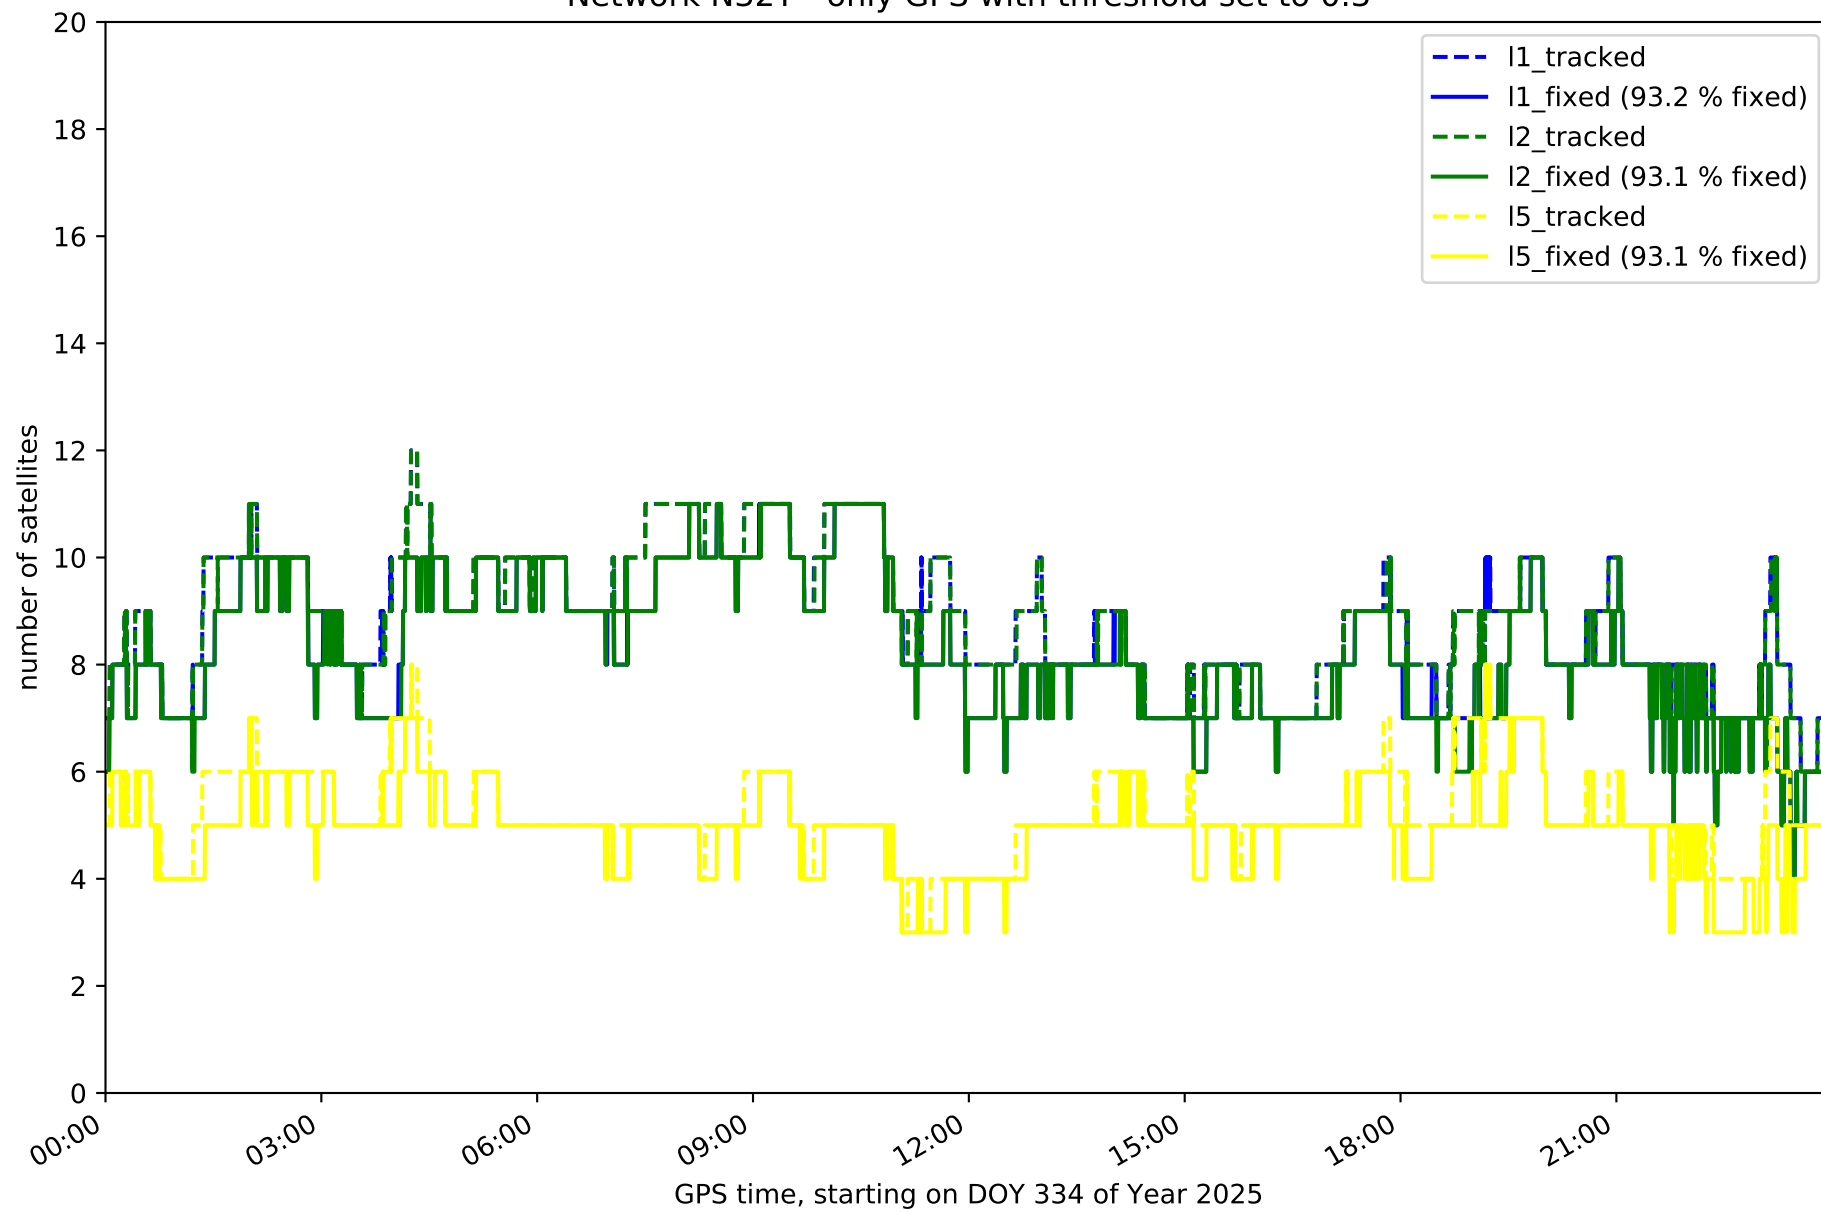


Network N32T - only GLONASS with threshold set to 0.3

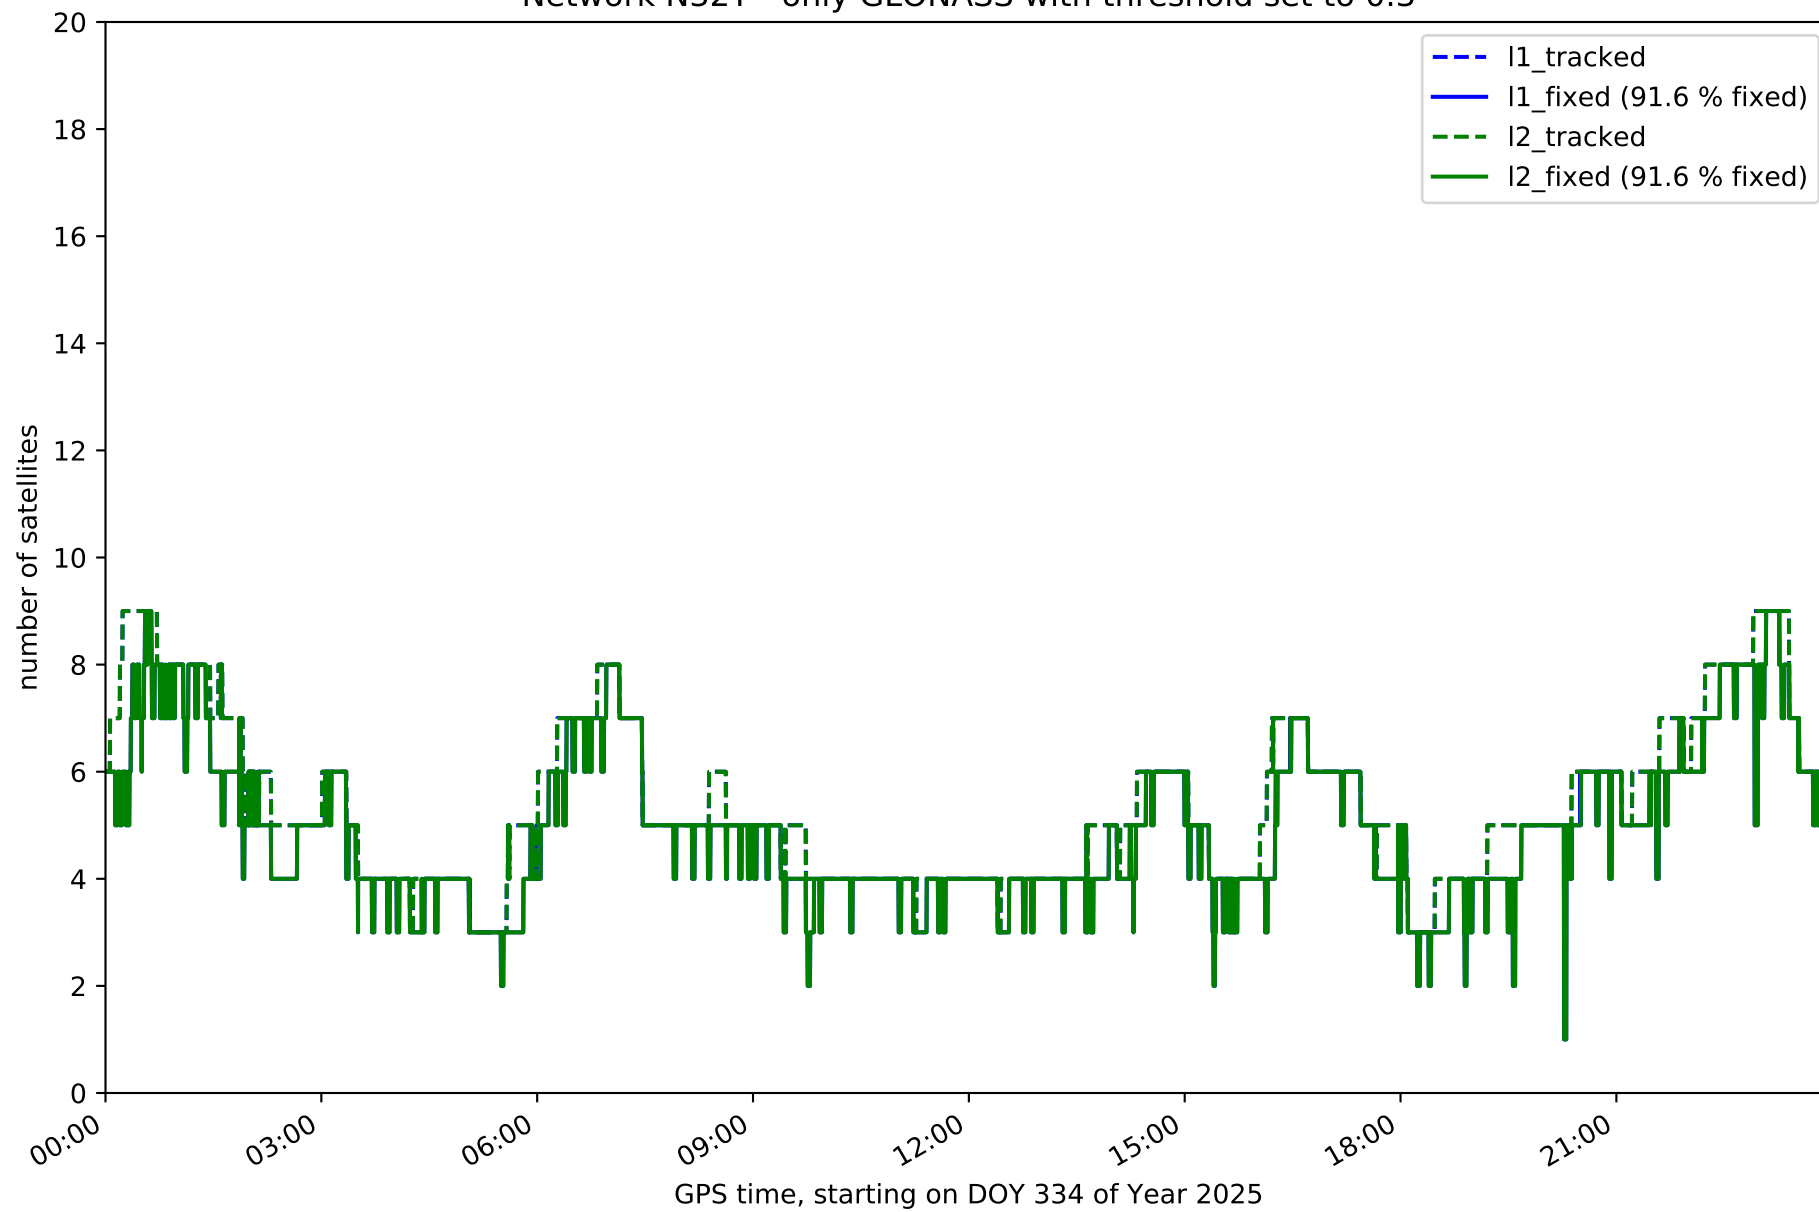


Network N32T - only BDS with threshold set to 0.3

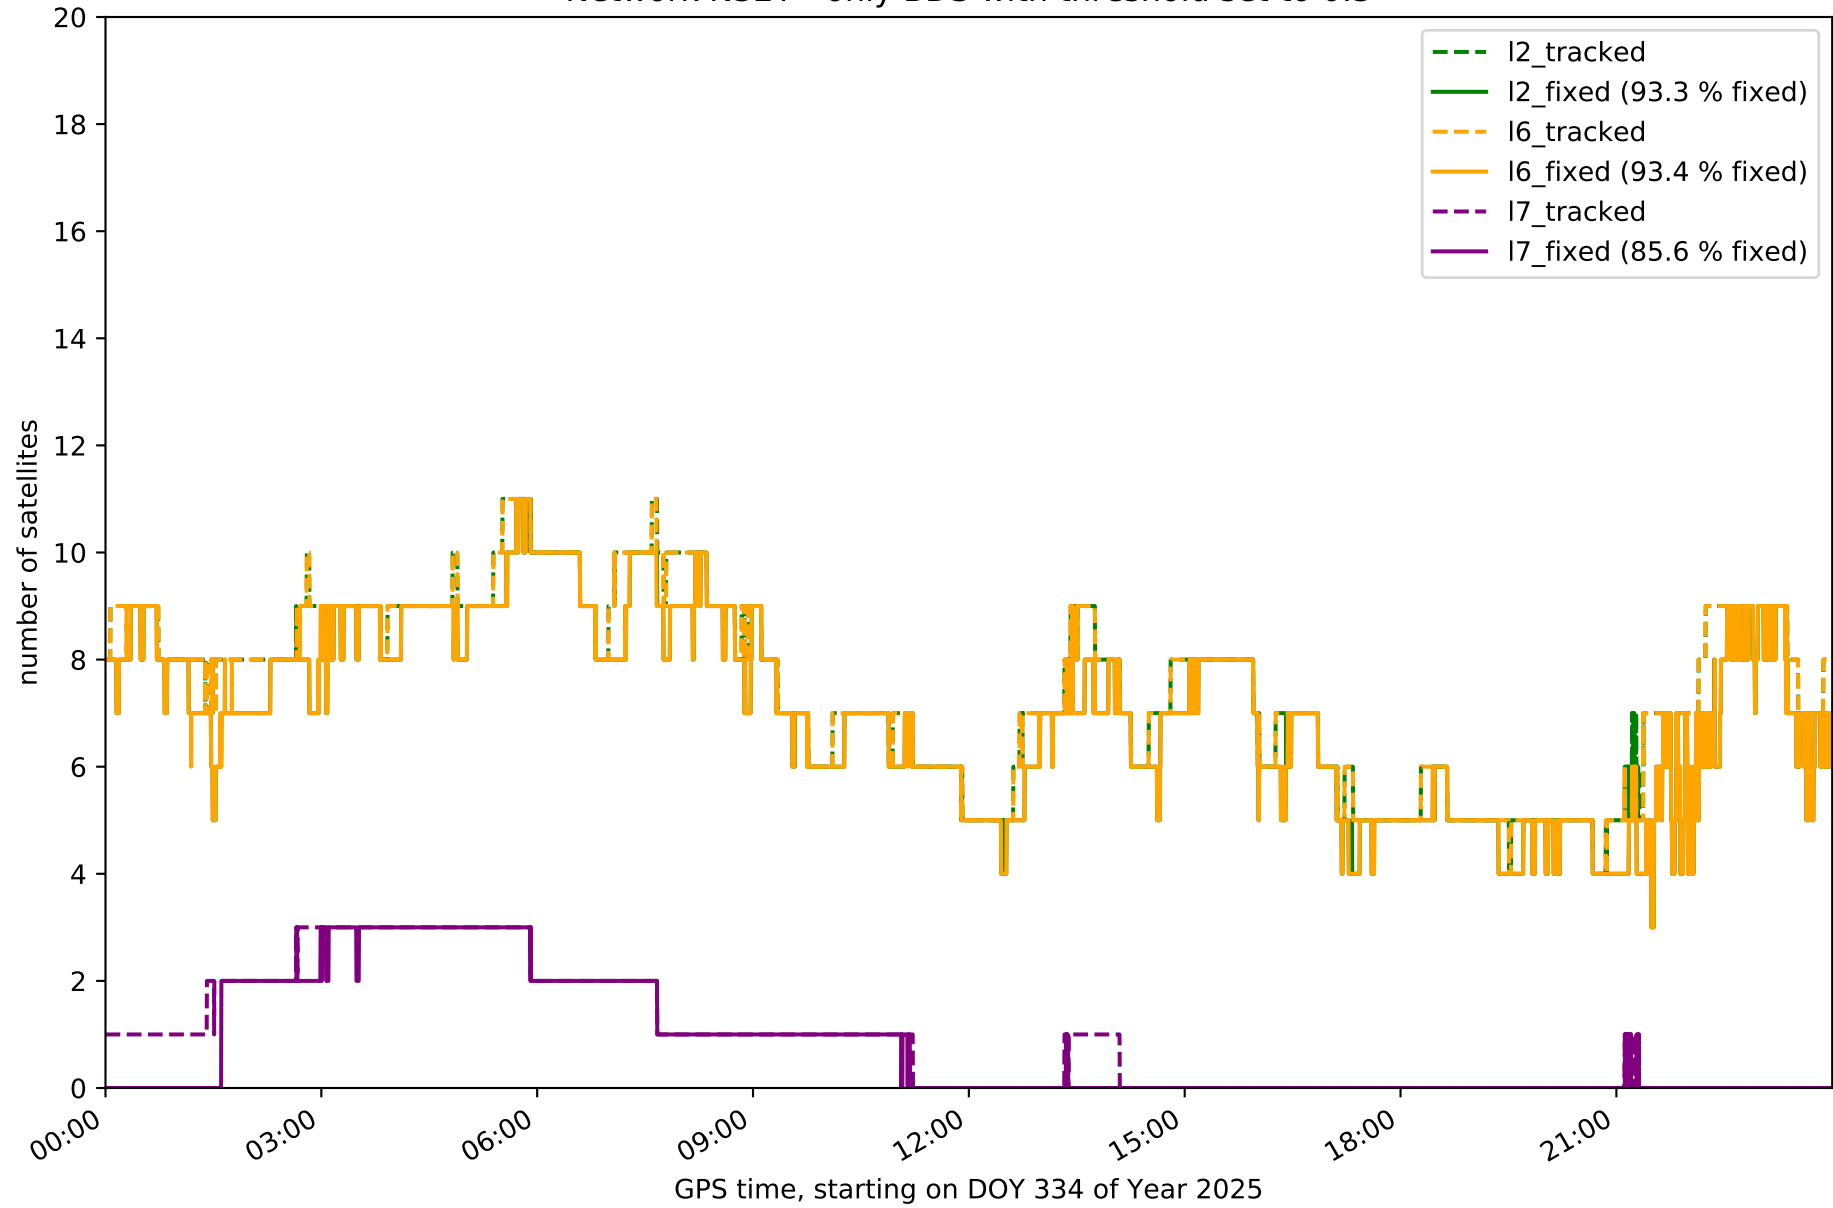


Network N32T - only Galileo with threshold set to 0.3

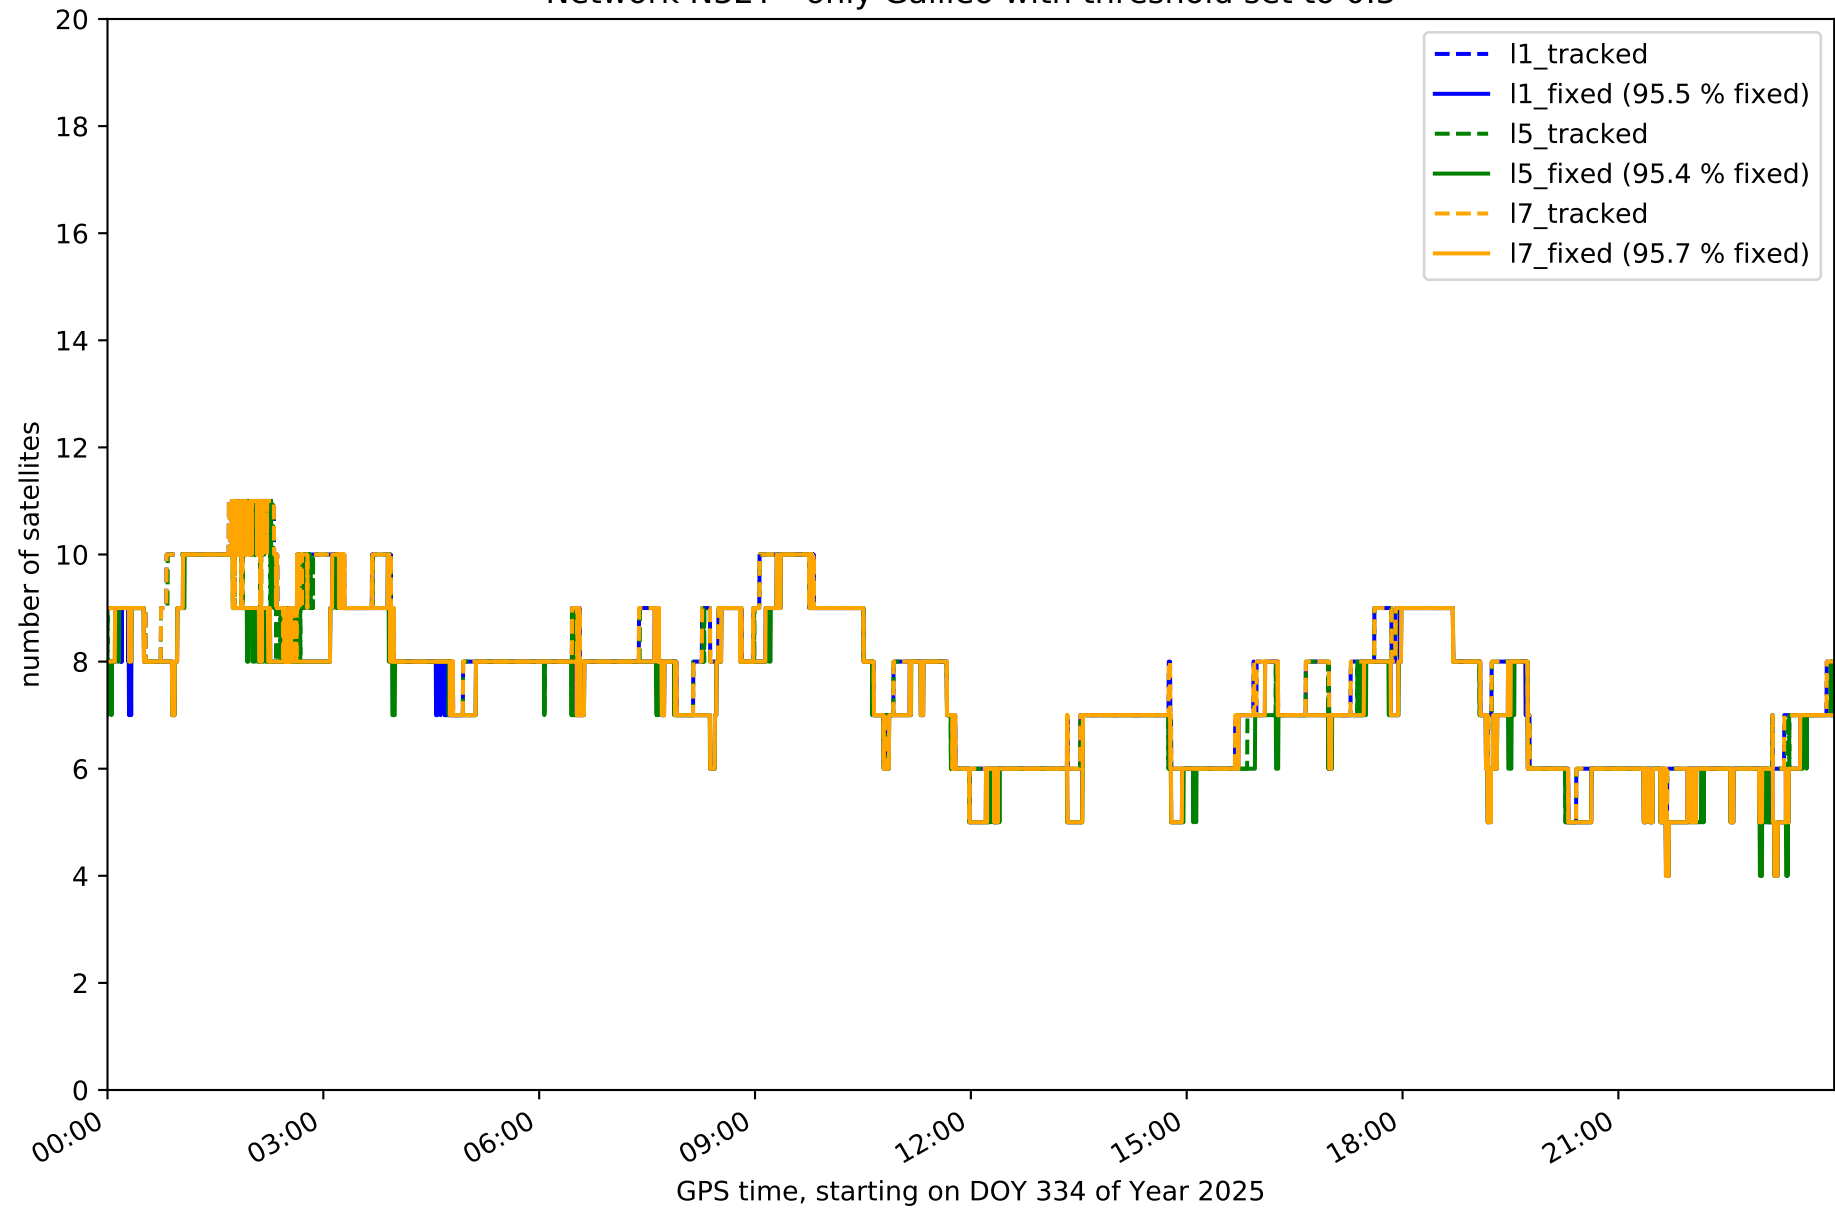


Station EH01 in network N32T

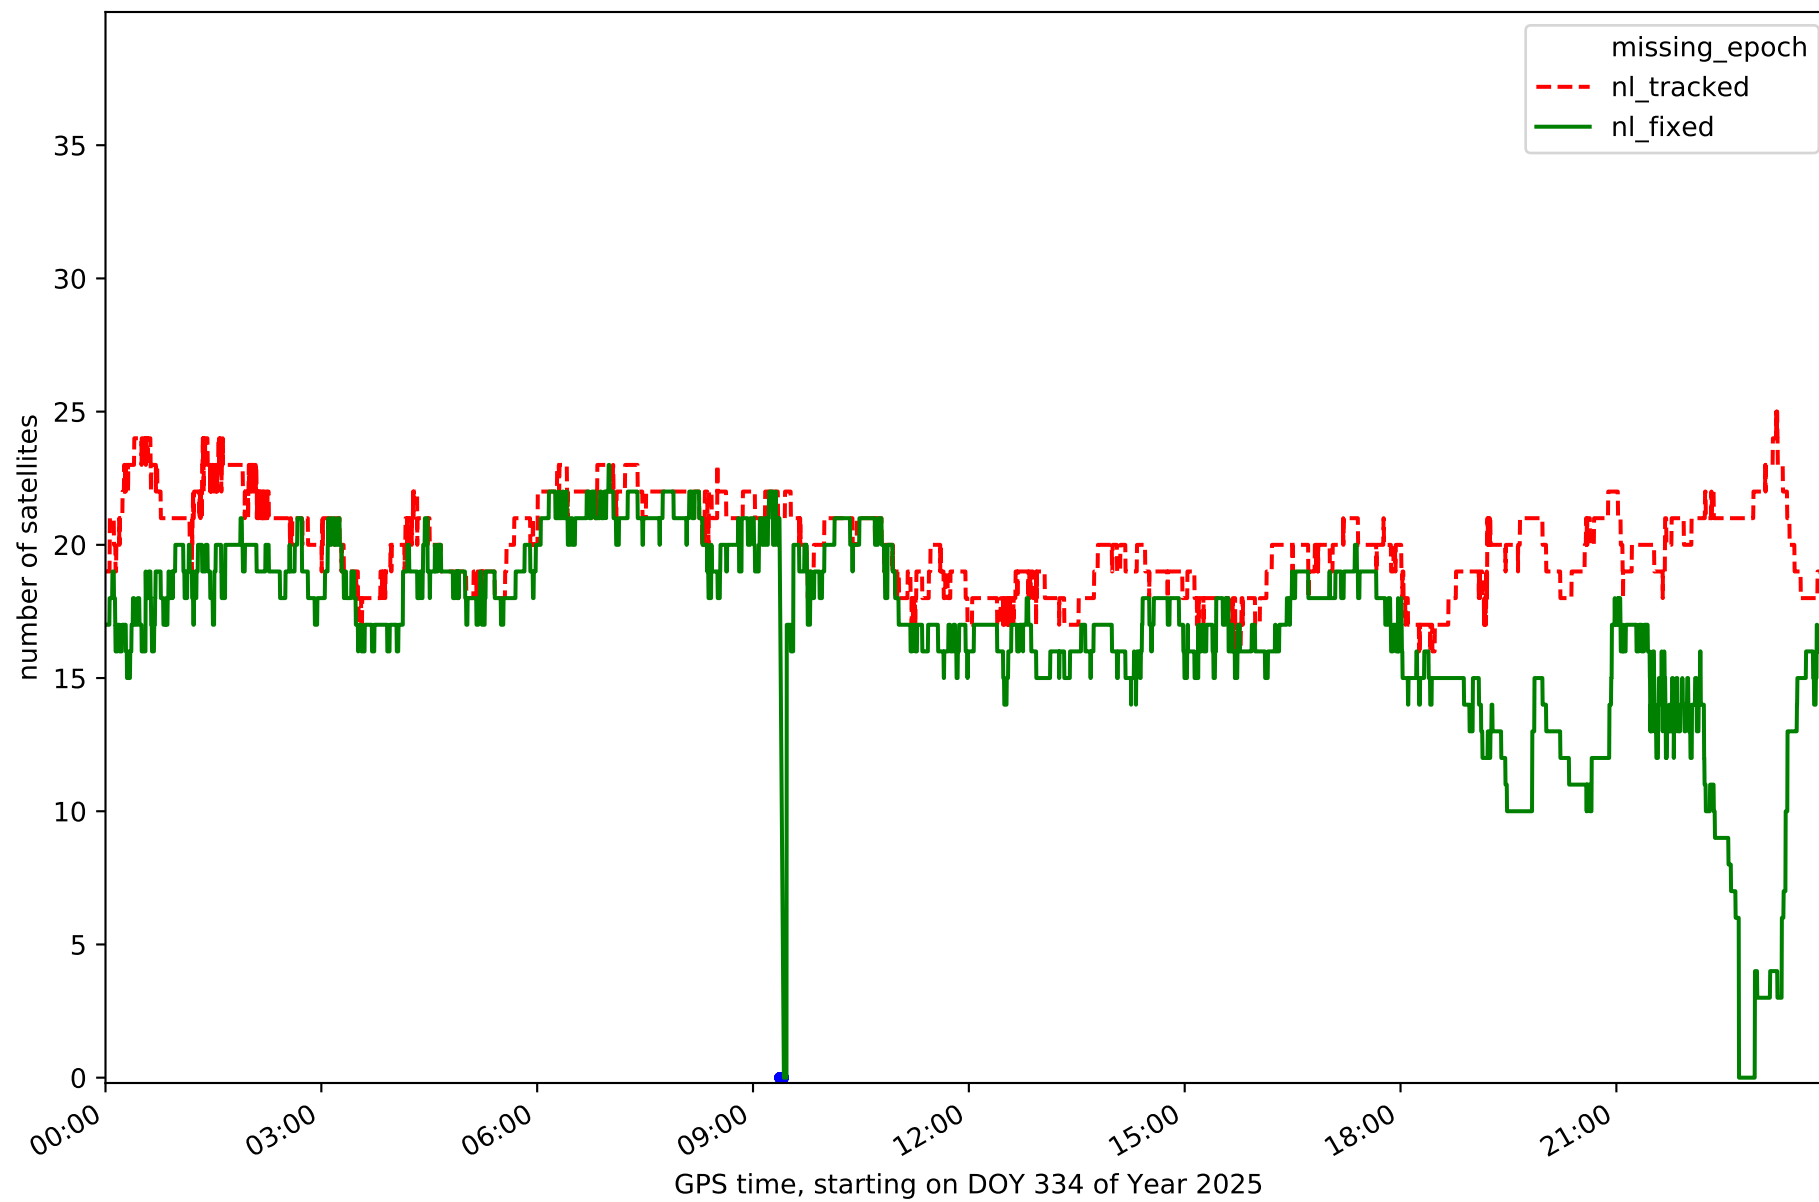


Station EH02 in network N32T

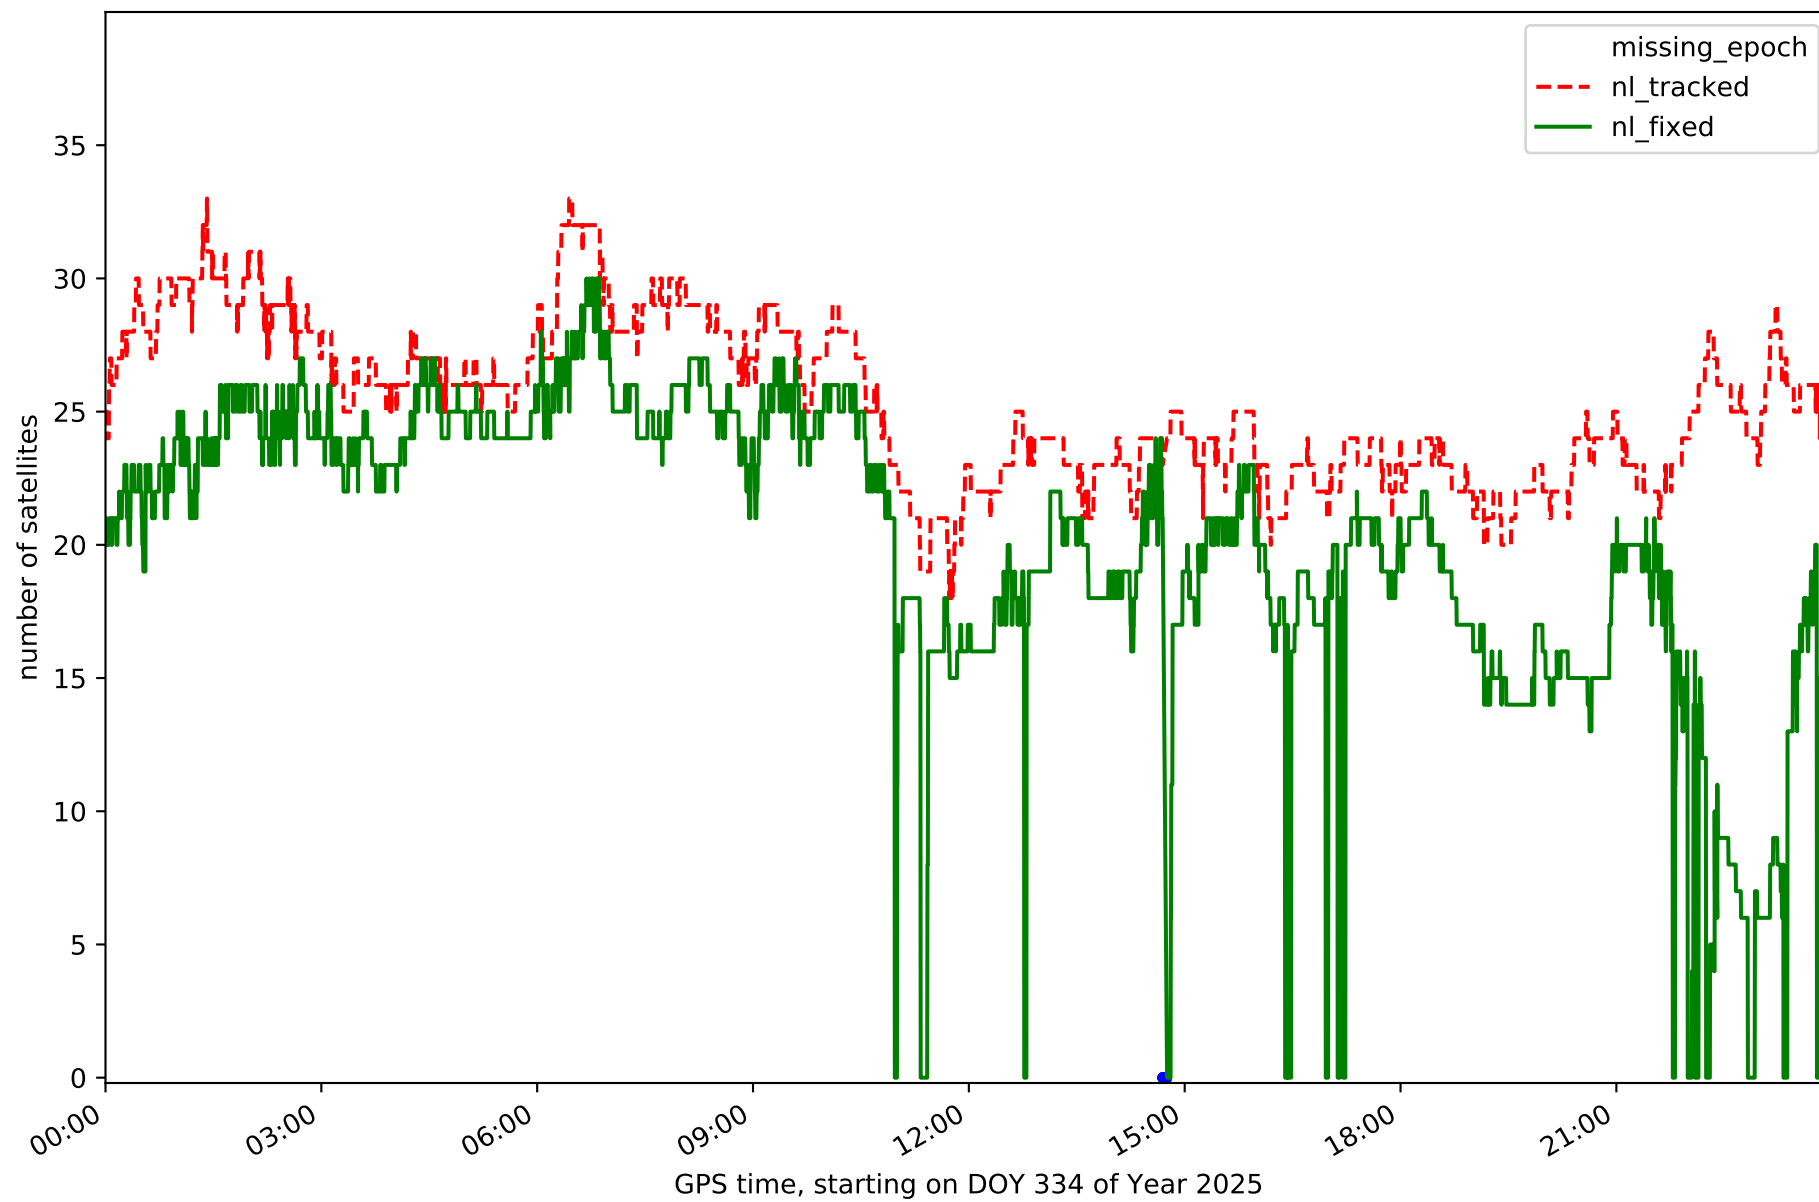


Station GOM1 in network N32T

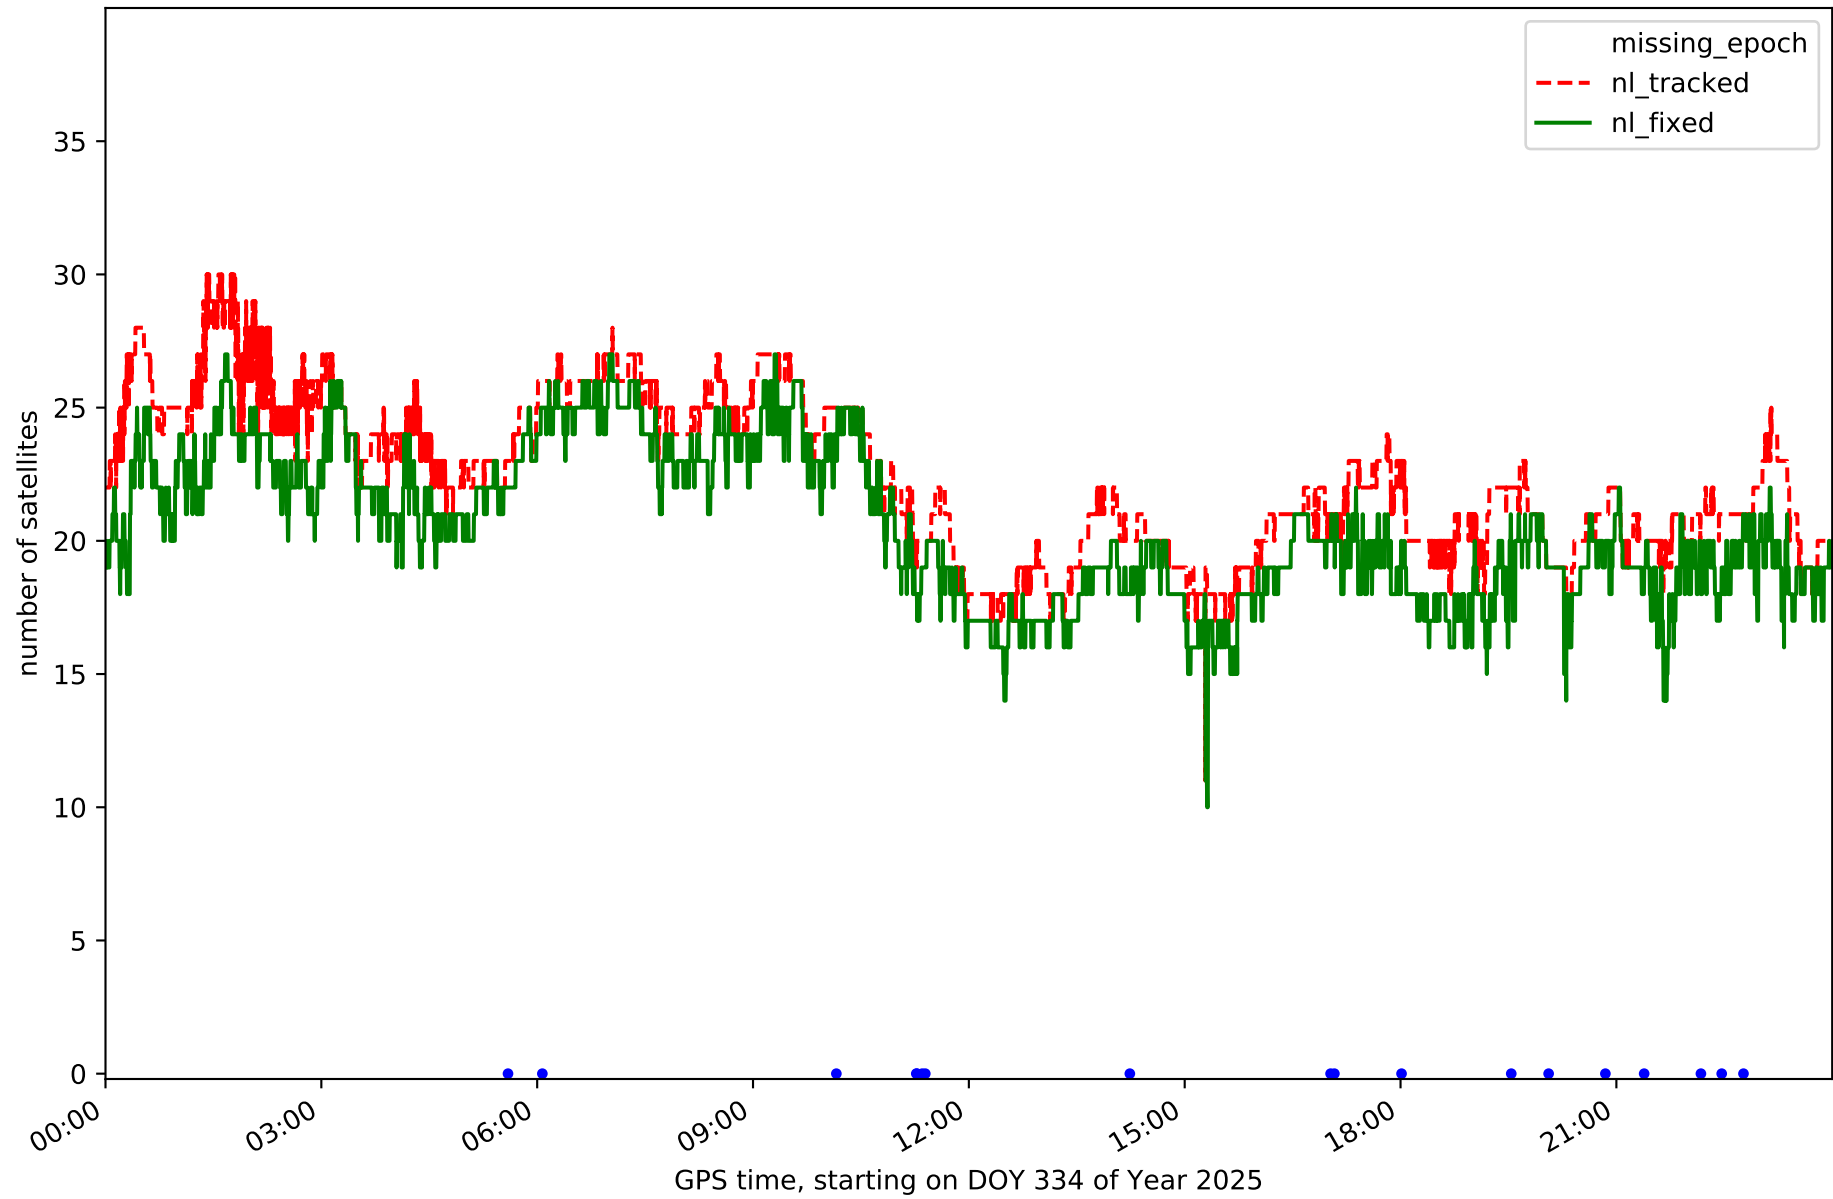


Station GOME in network N32T

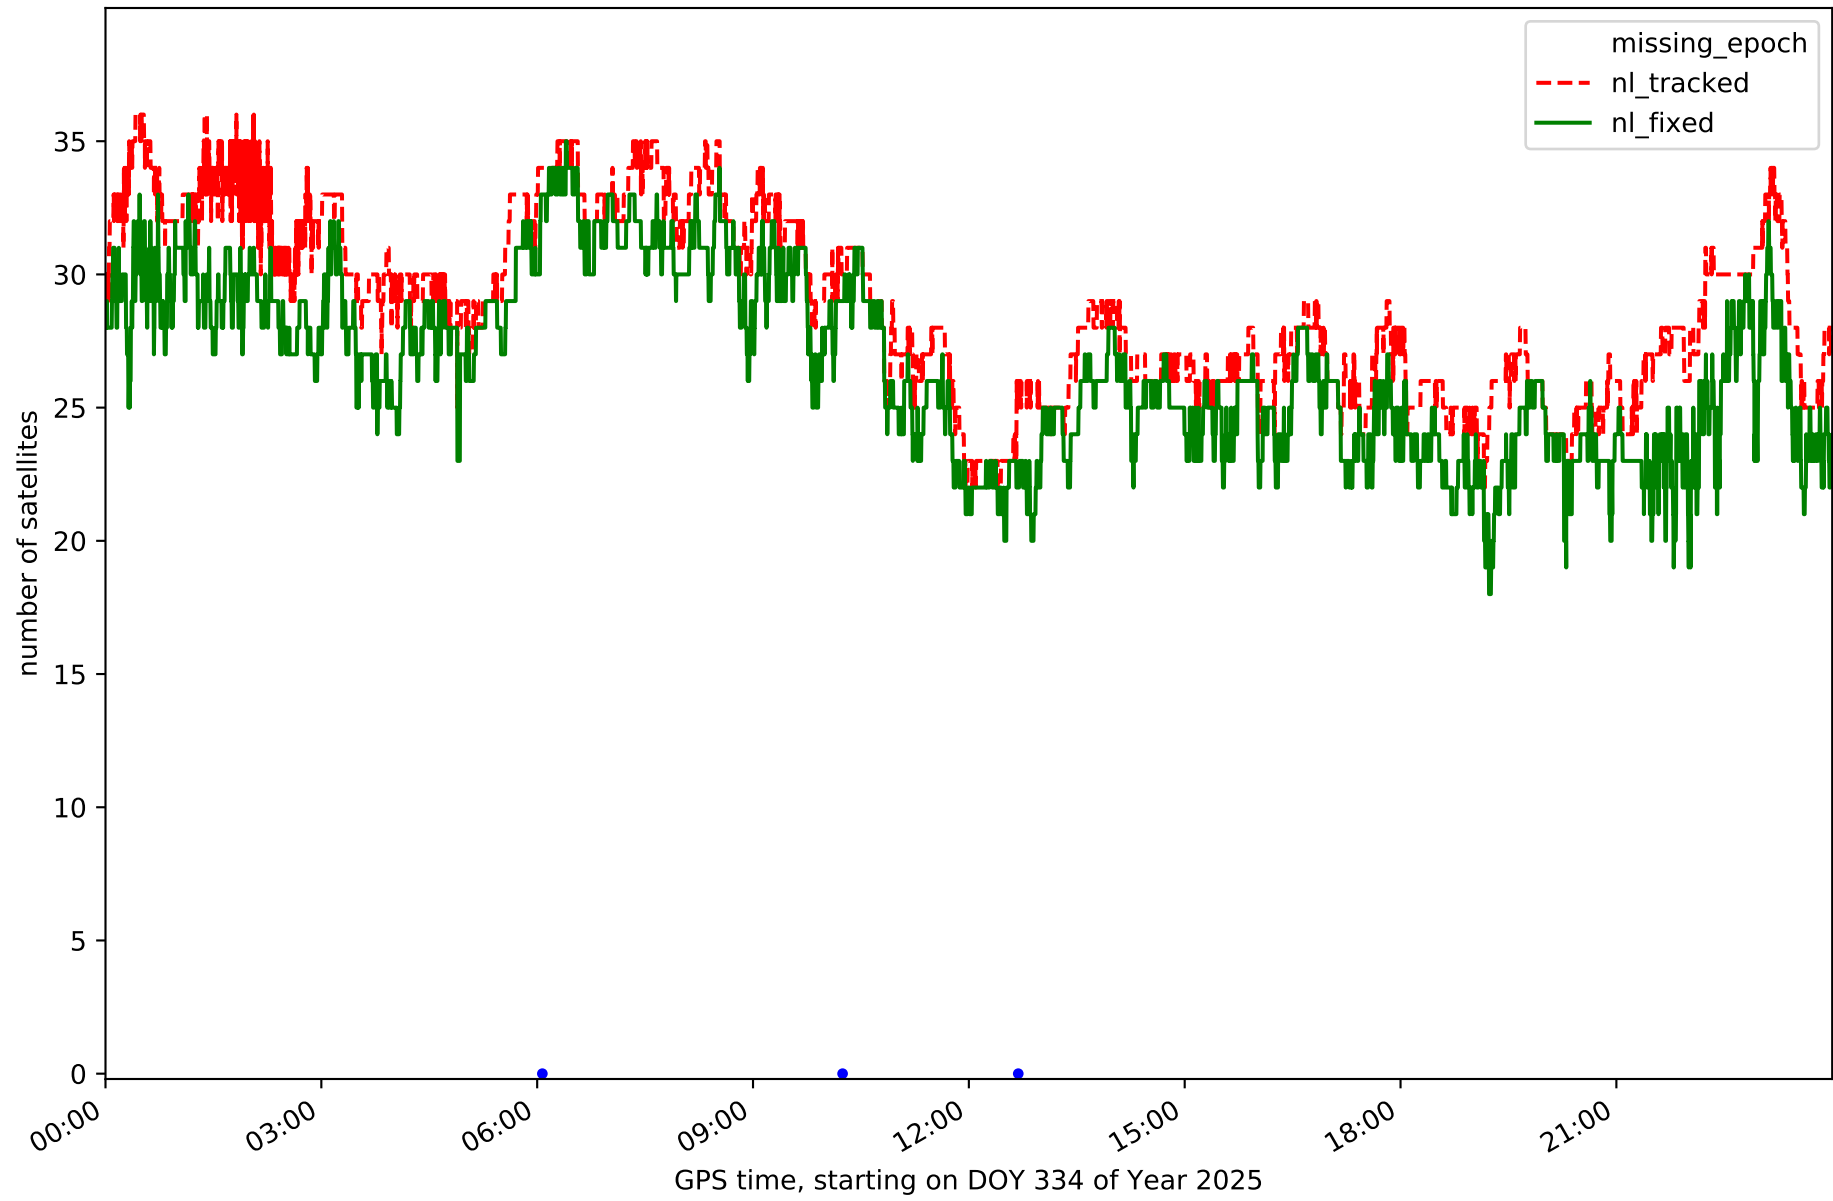


Station IZAN in network N32T

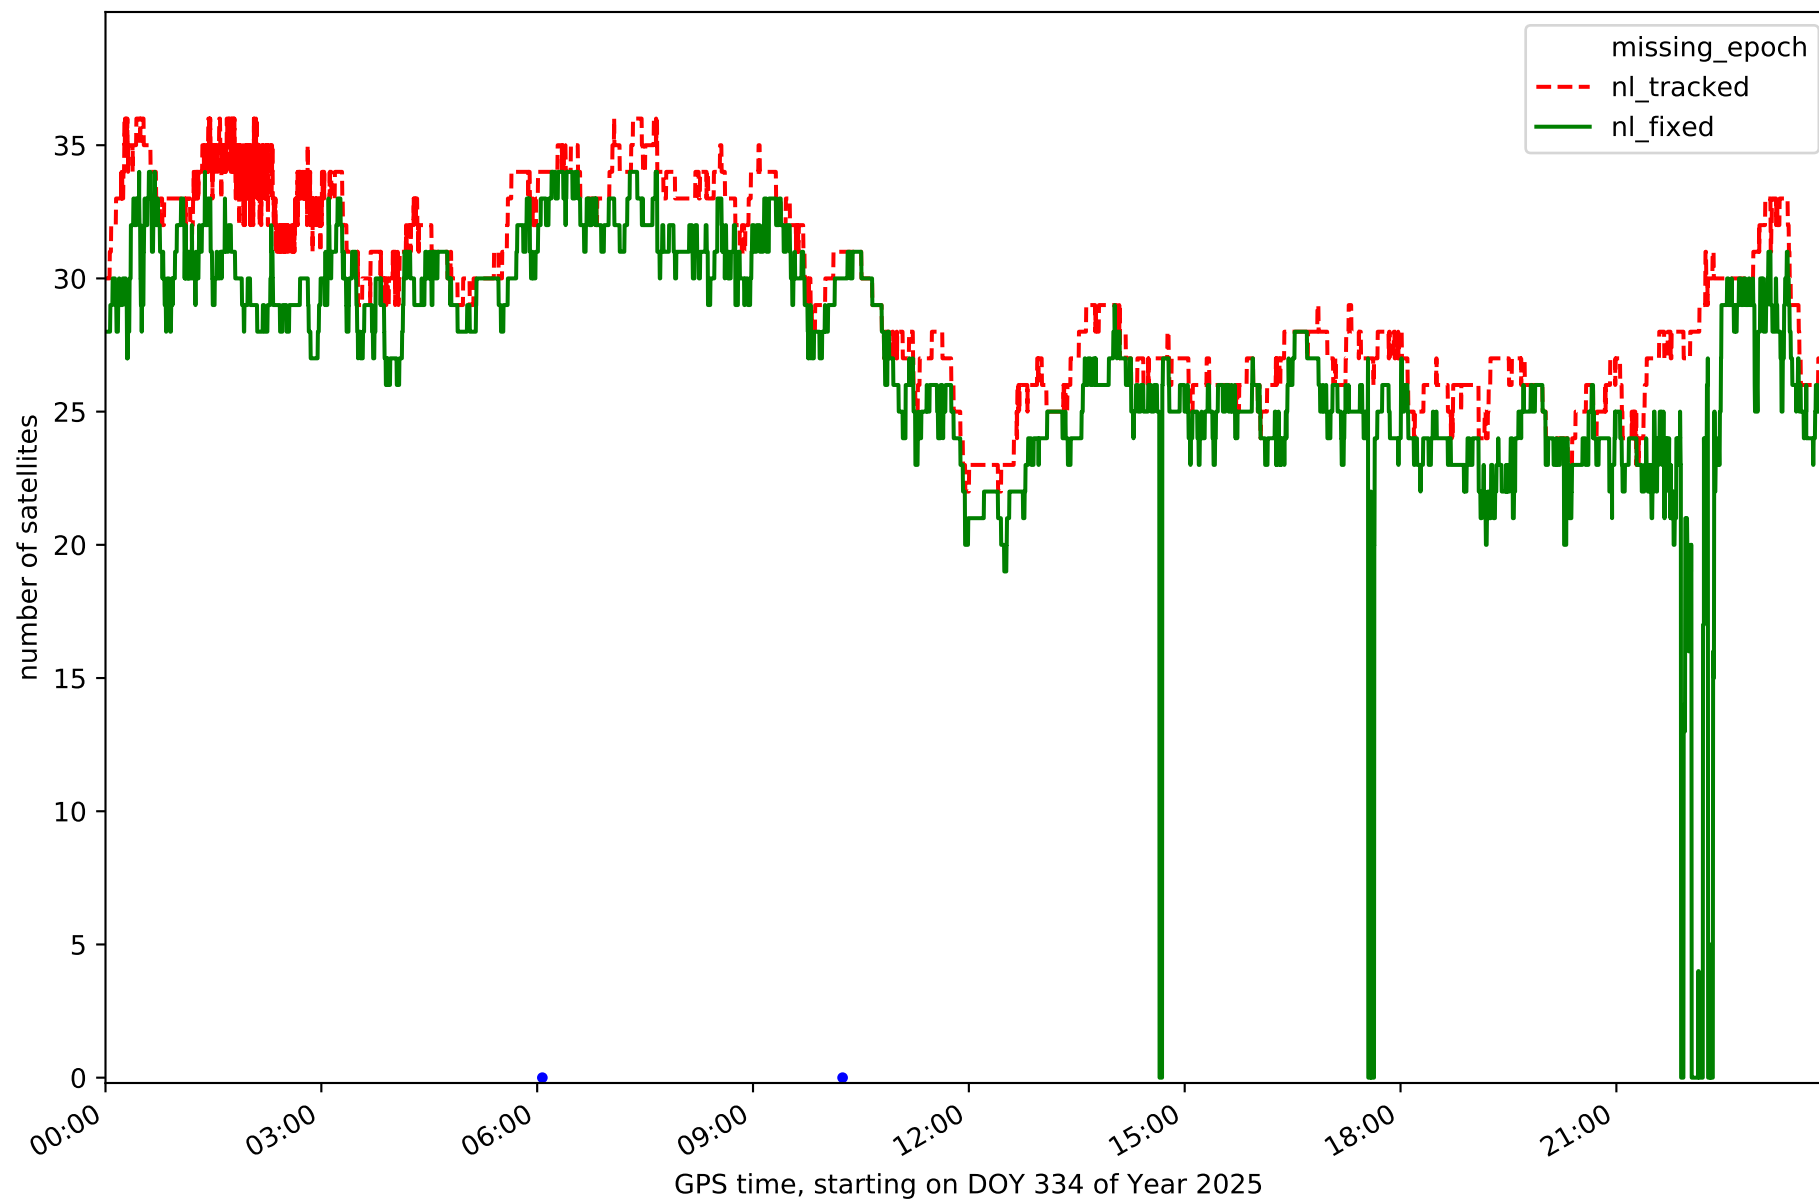


Station LP01 in network N32T

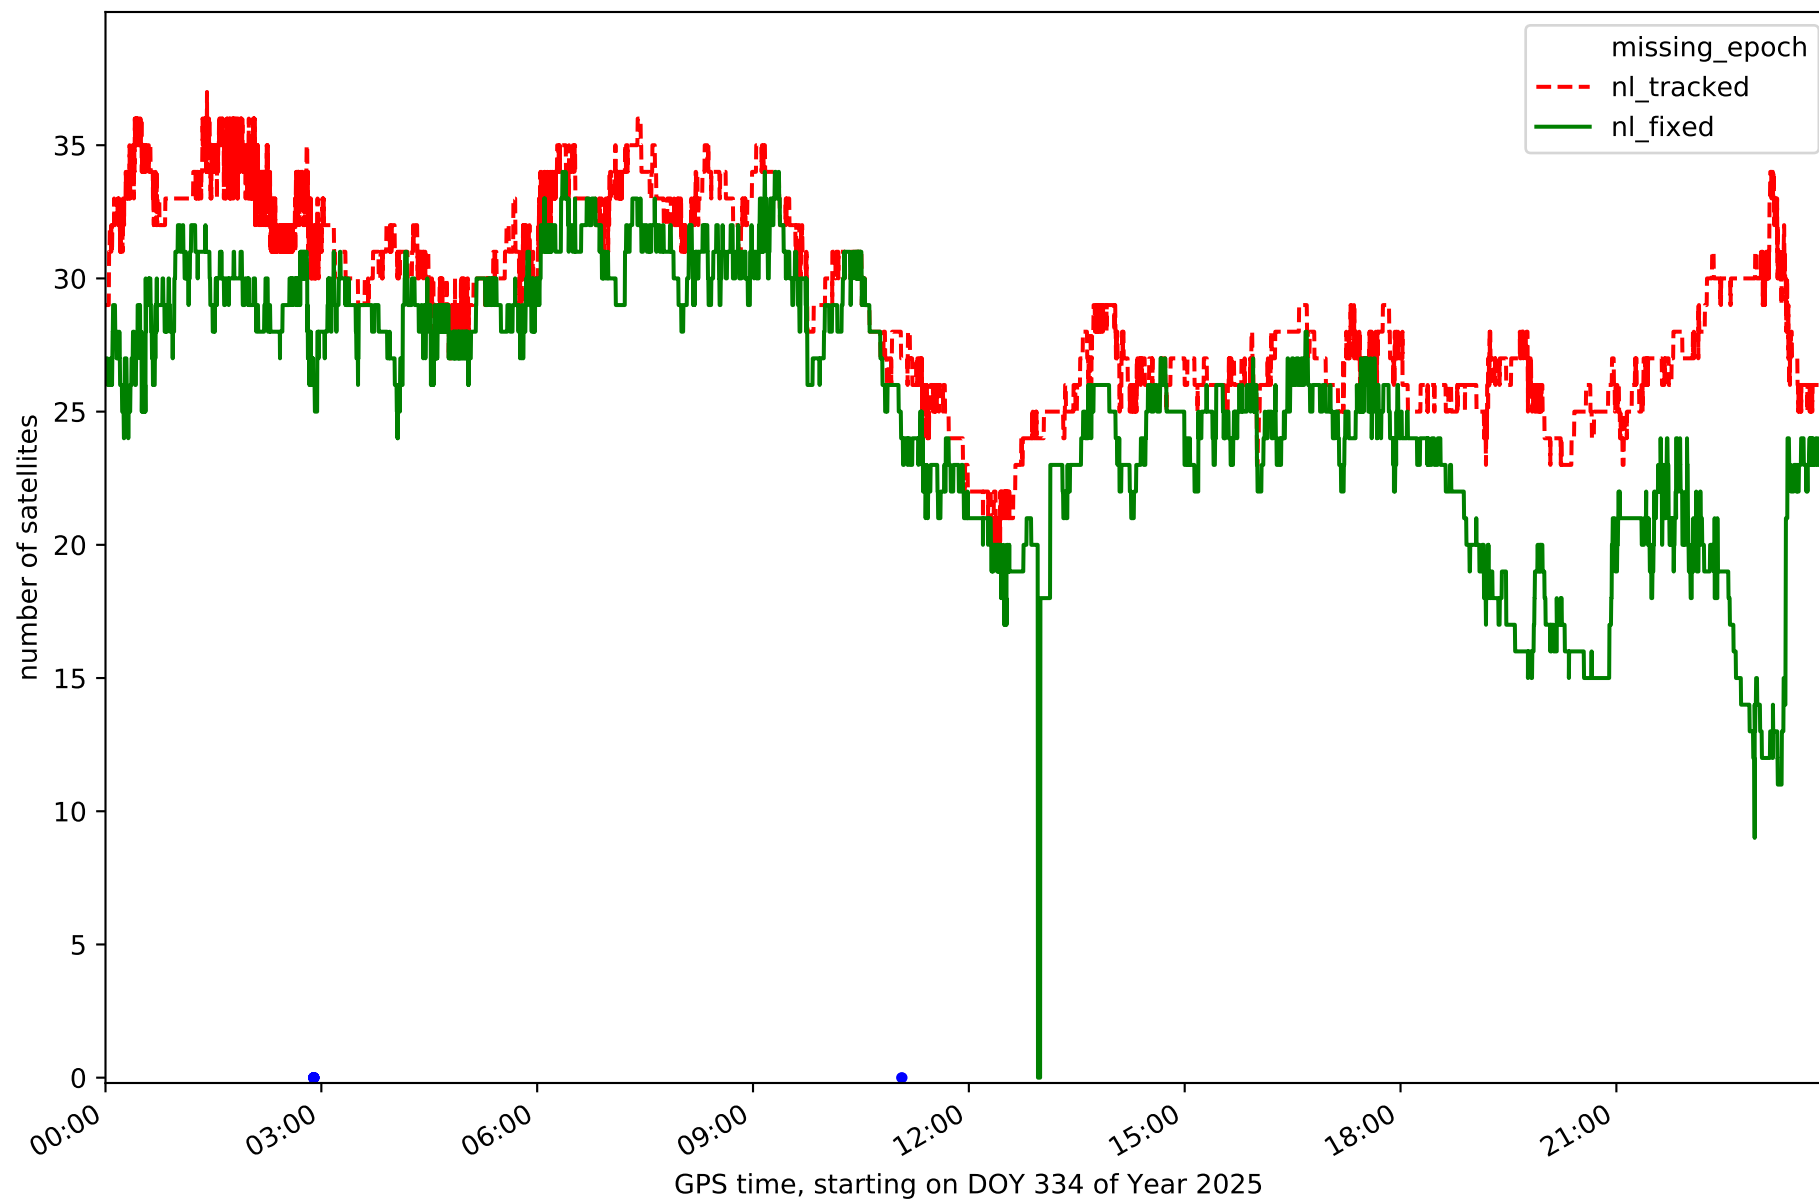


Station LP03 in network N32T

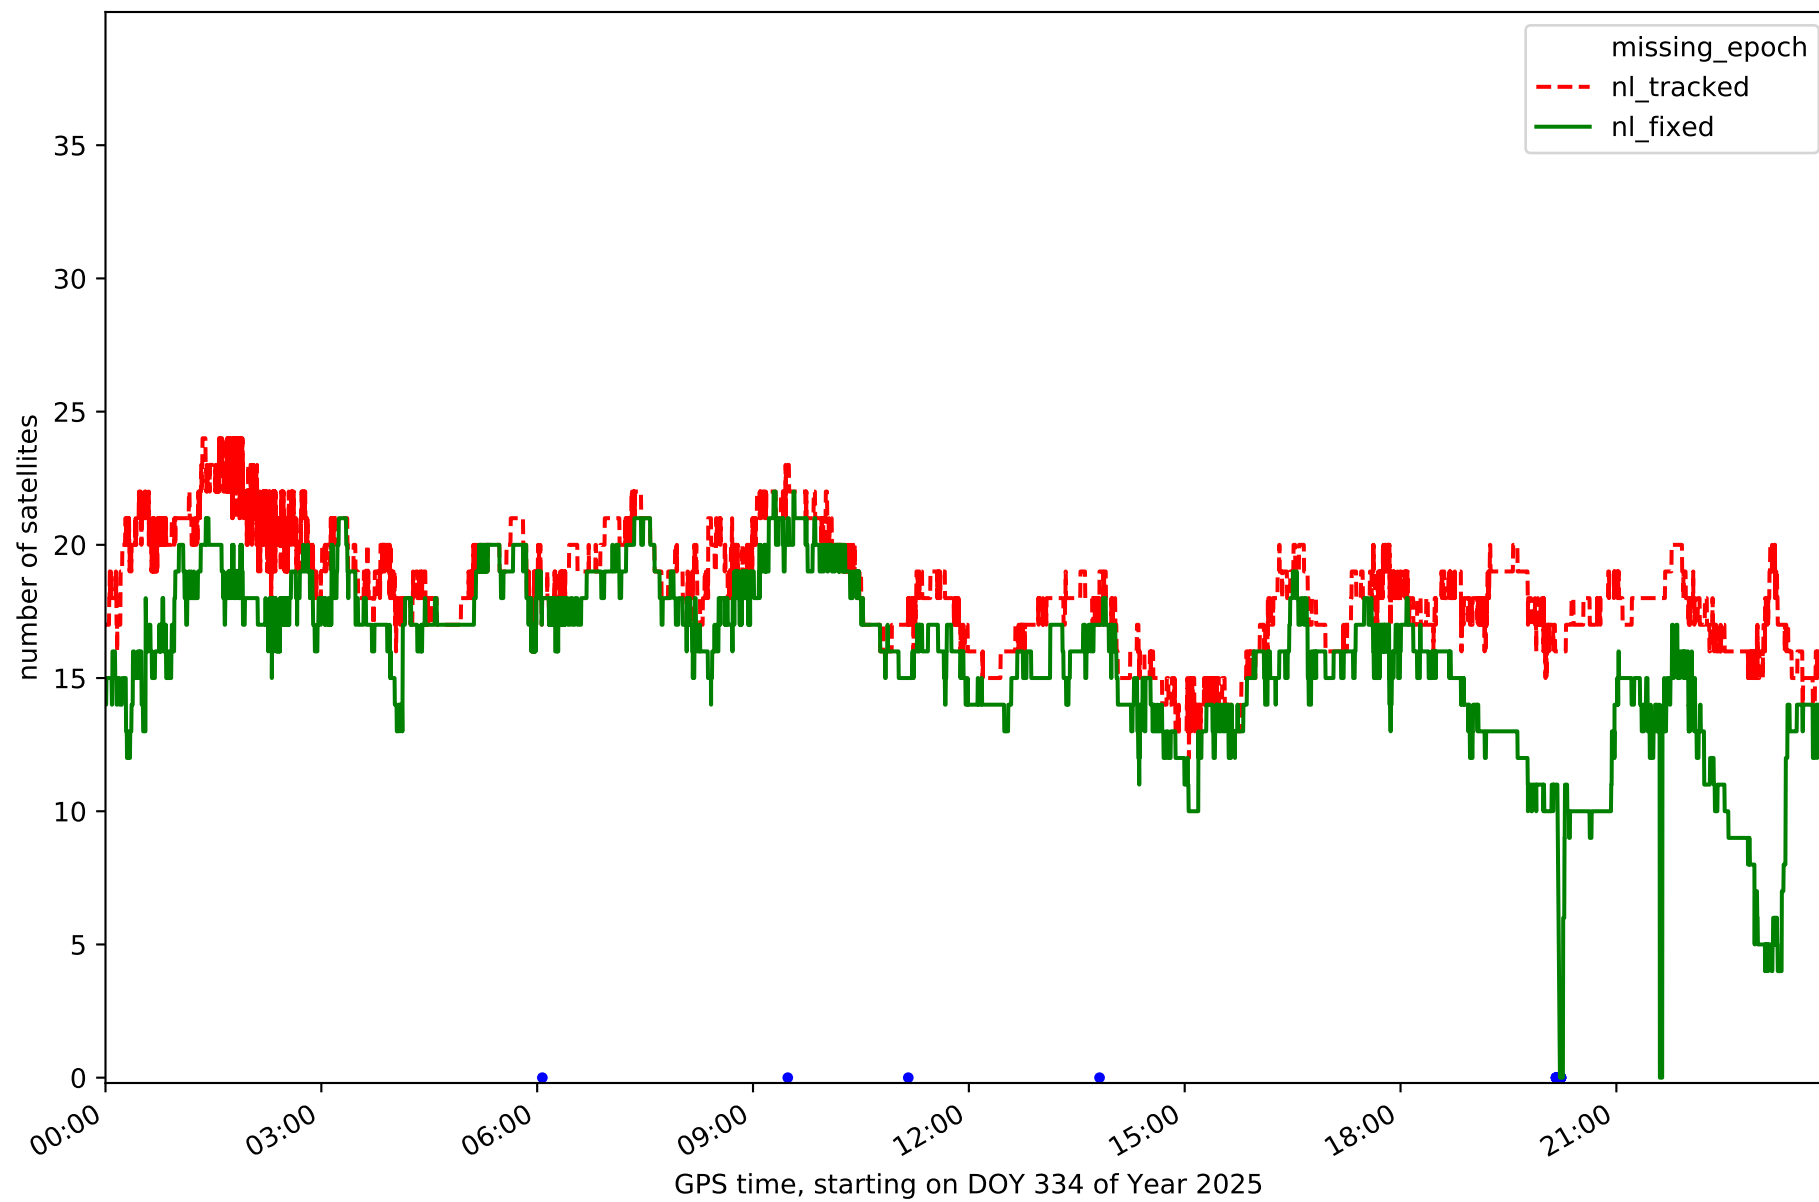


Station LPAL in network N32T

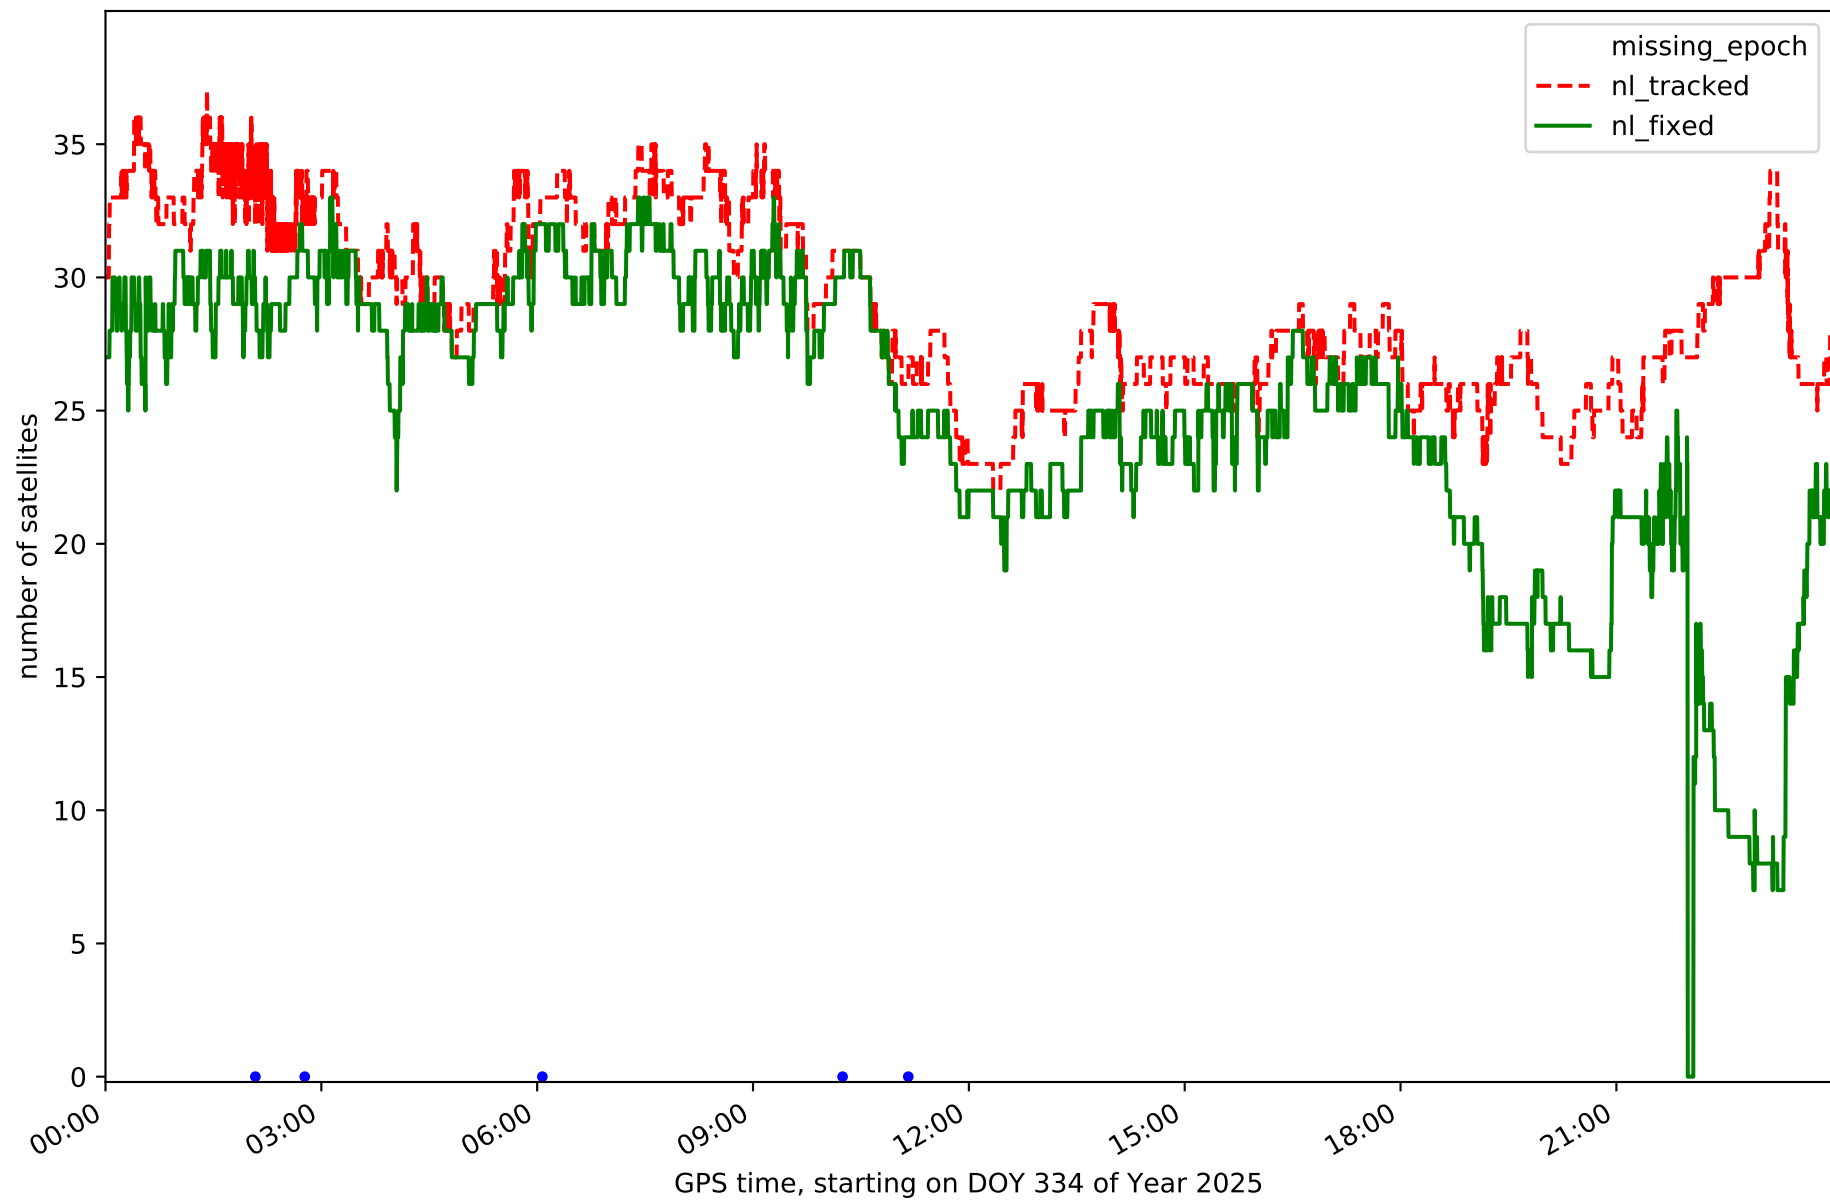


Station LRES in network N32T

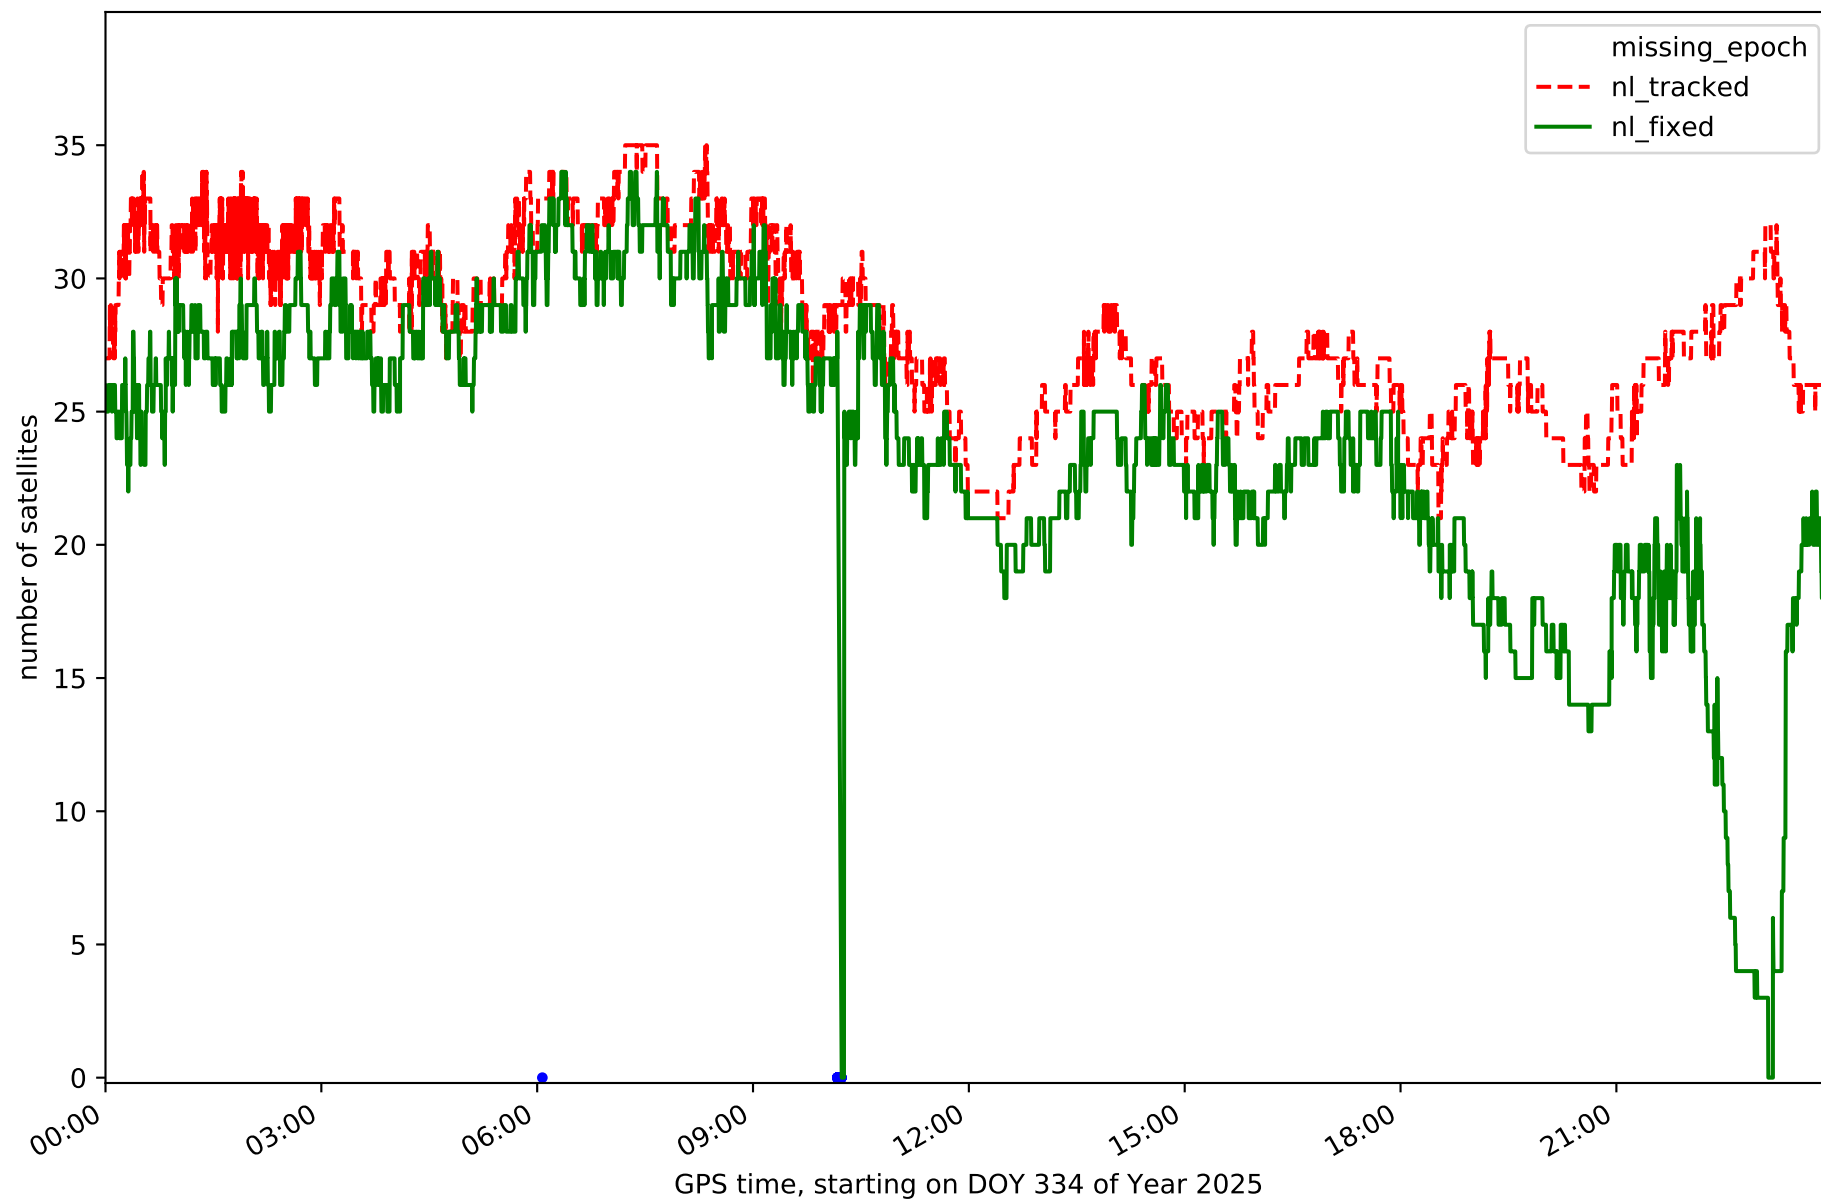


Station TN01 in network N32T

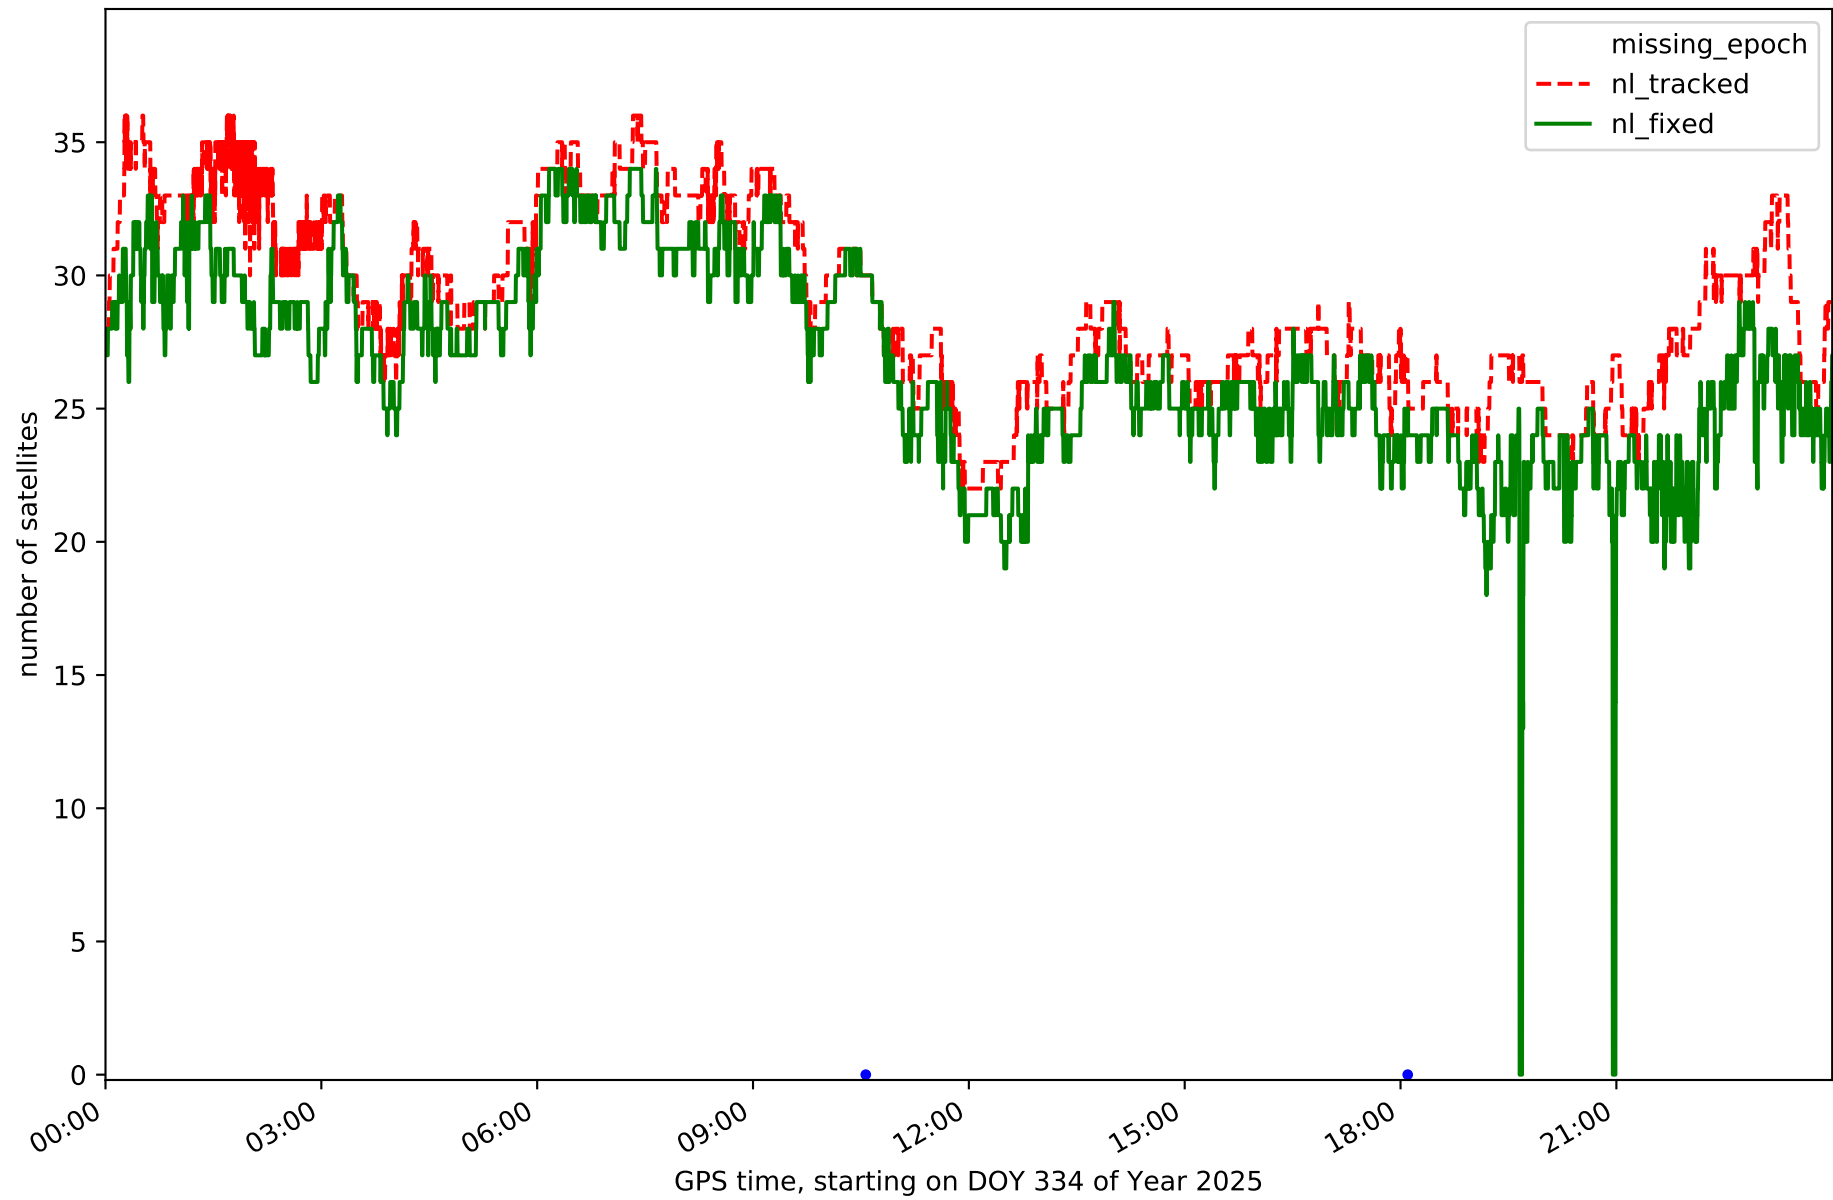


Station TN02 in network N32T

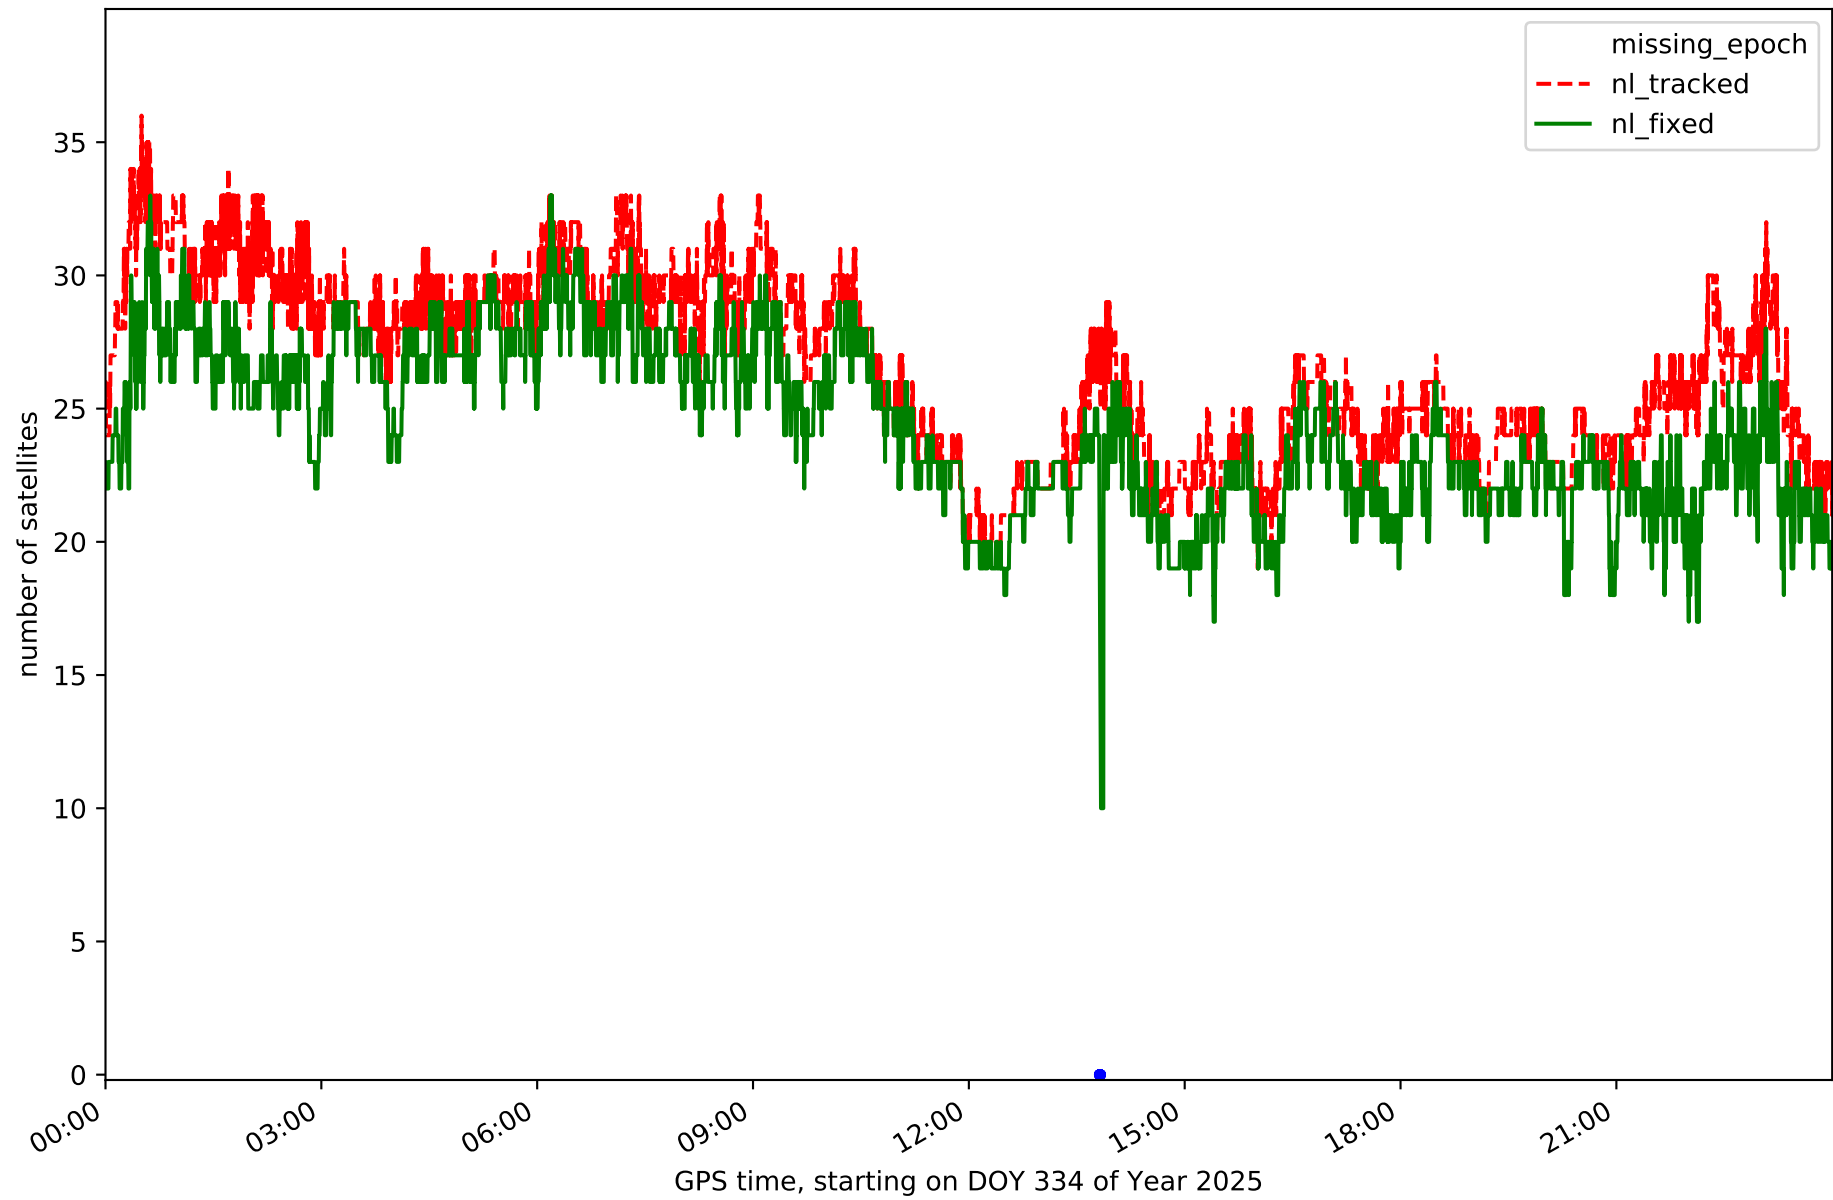


Station TN03 in network N32T

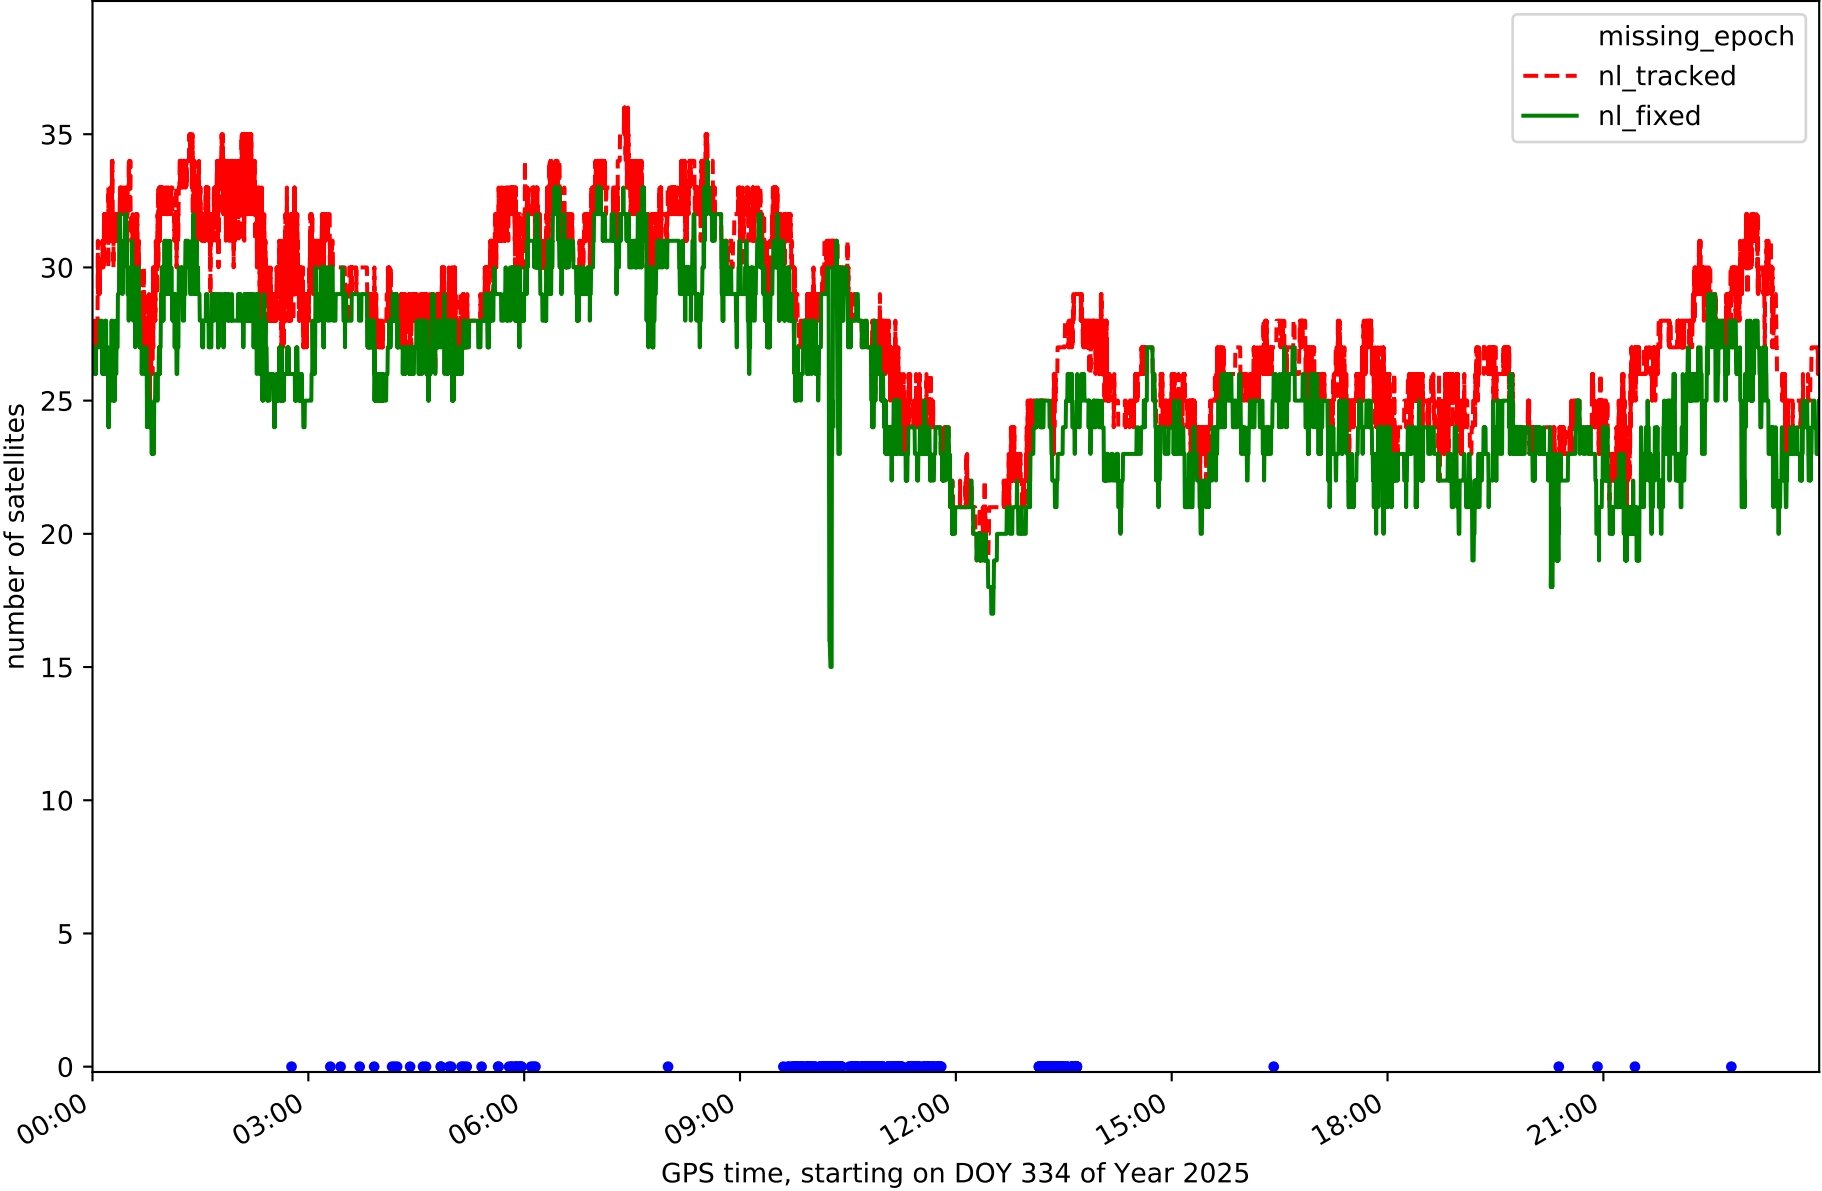


Station TN06 in network N32T

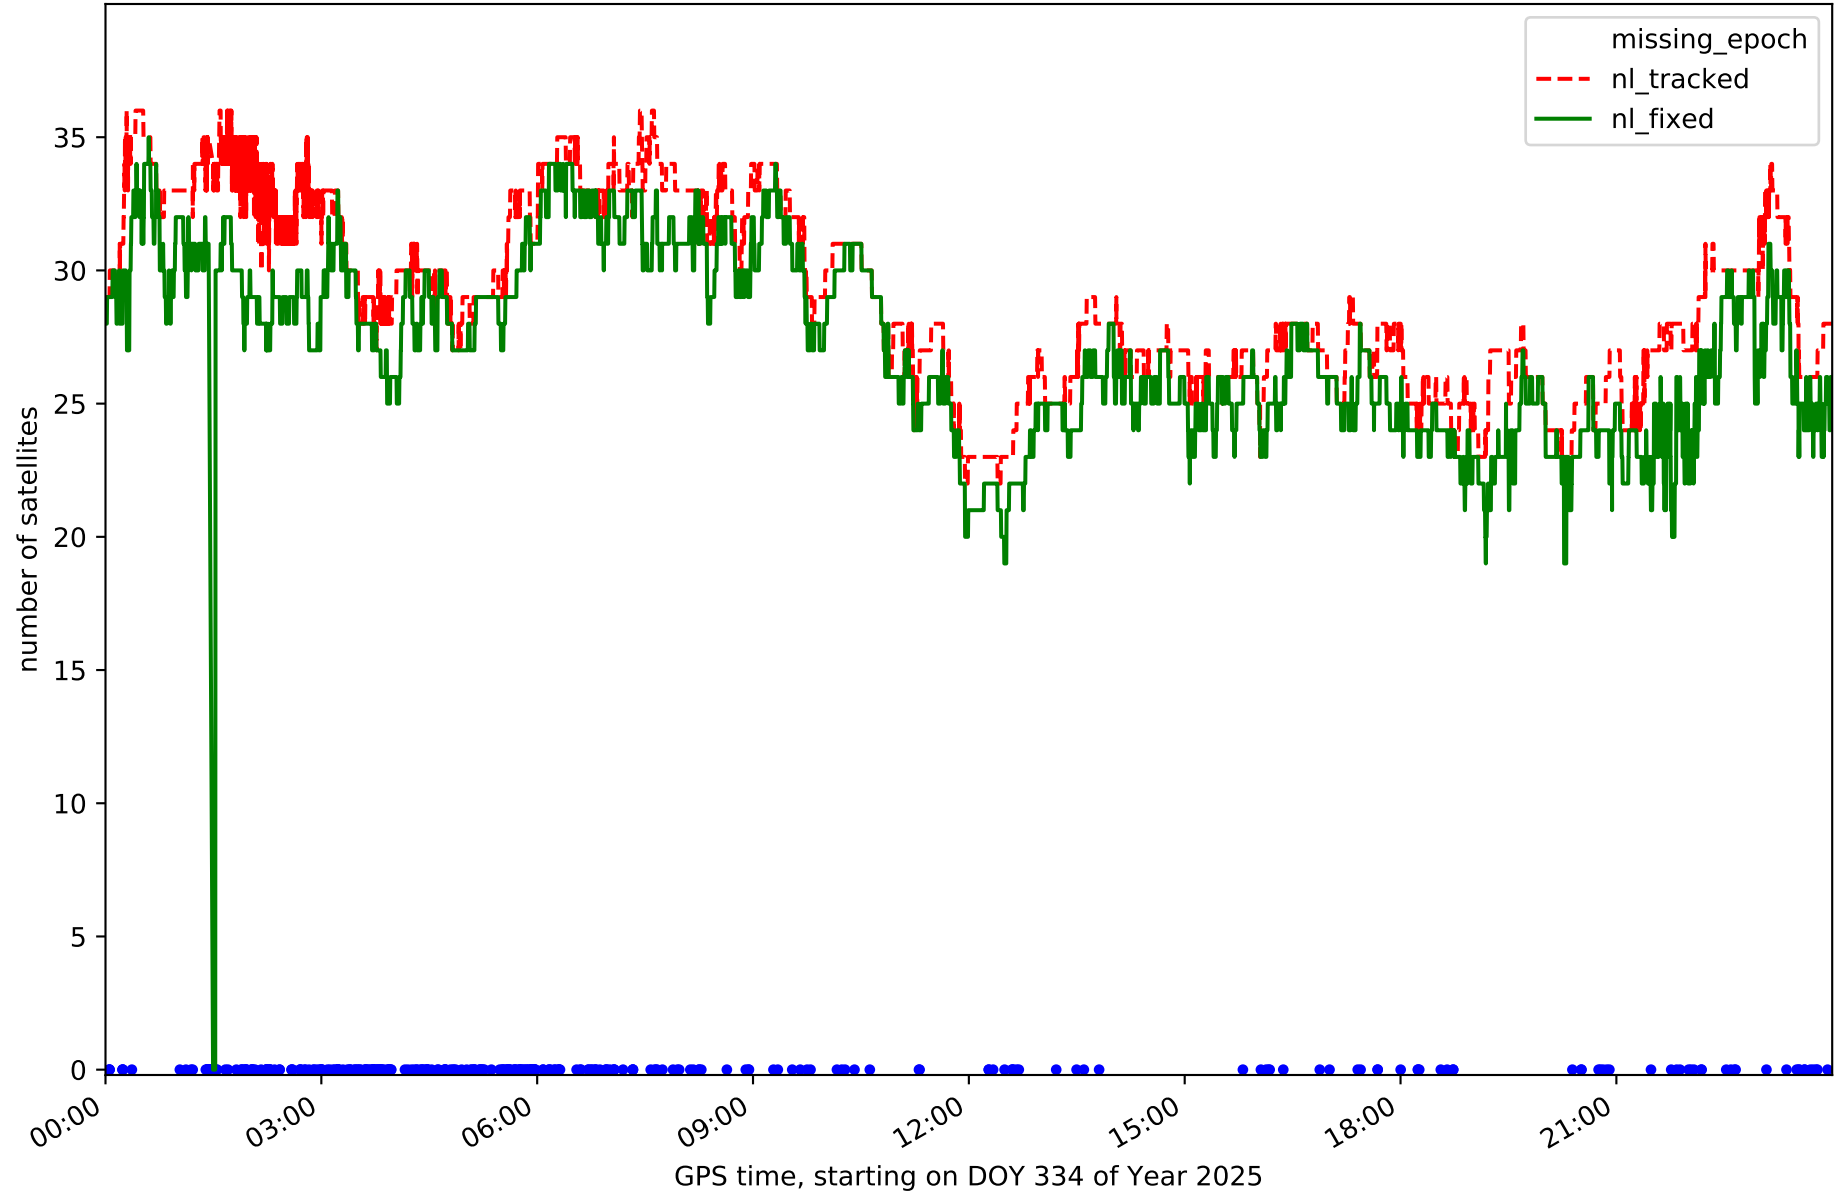


Station TN09 in network N32T

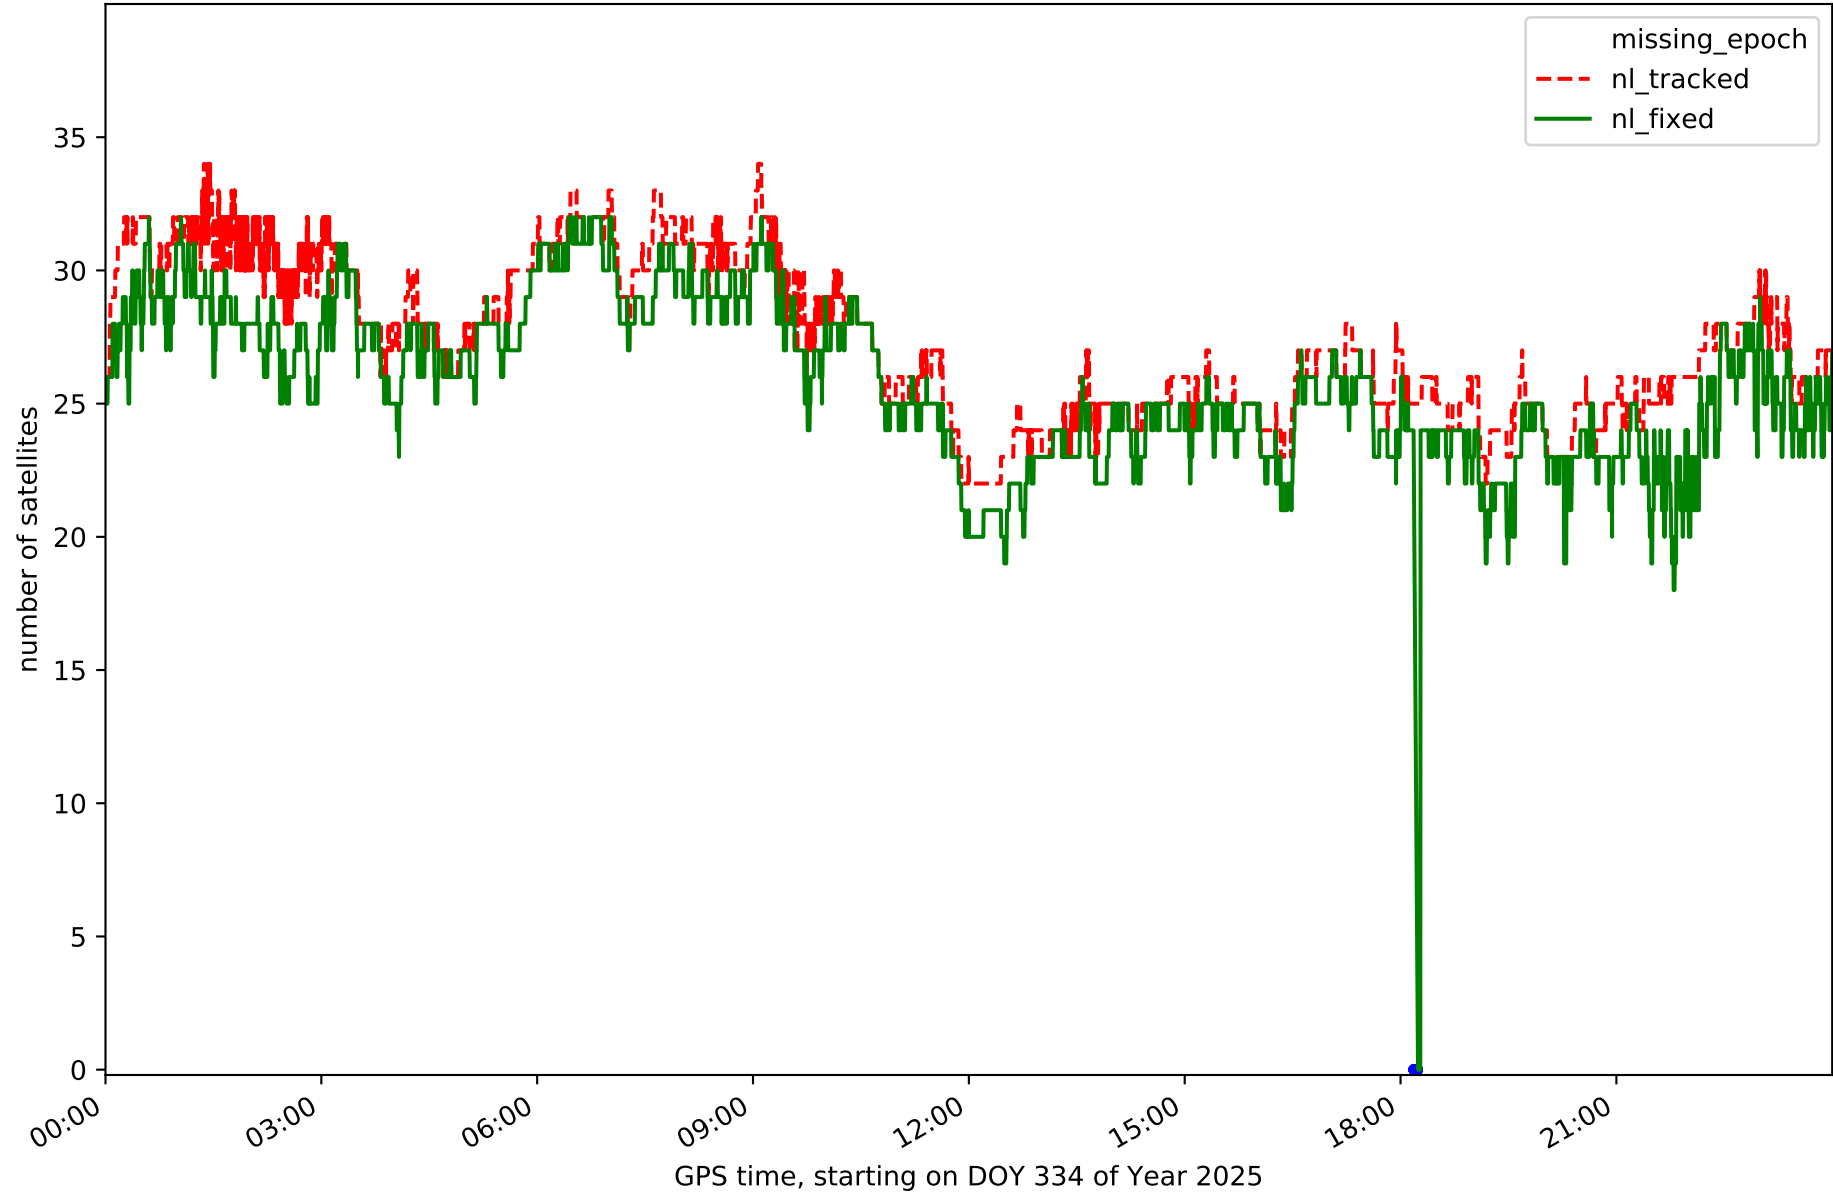


Station TE11 in network N32T

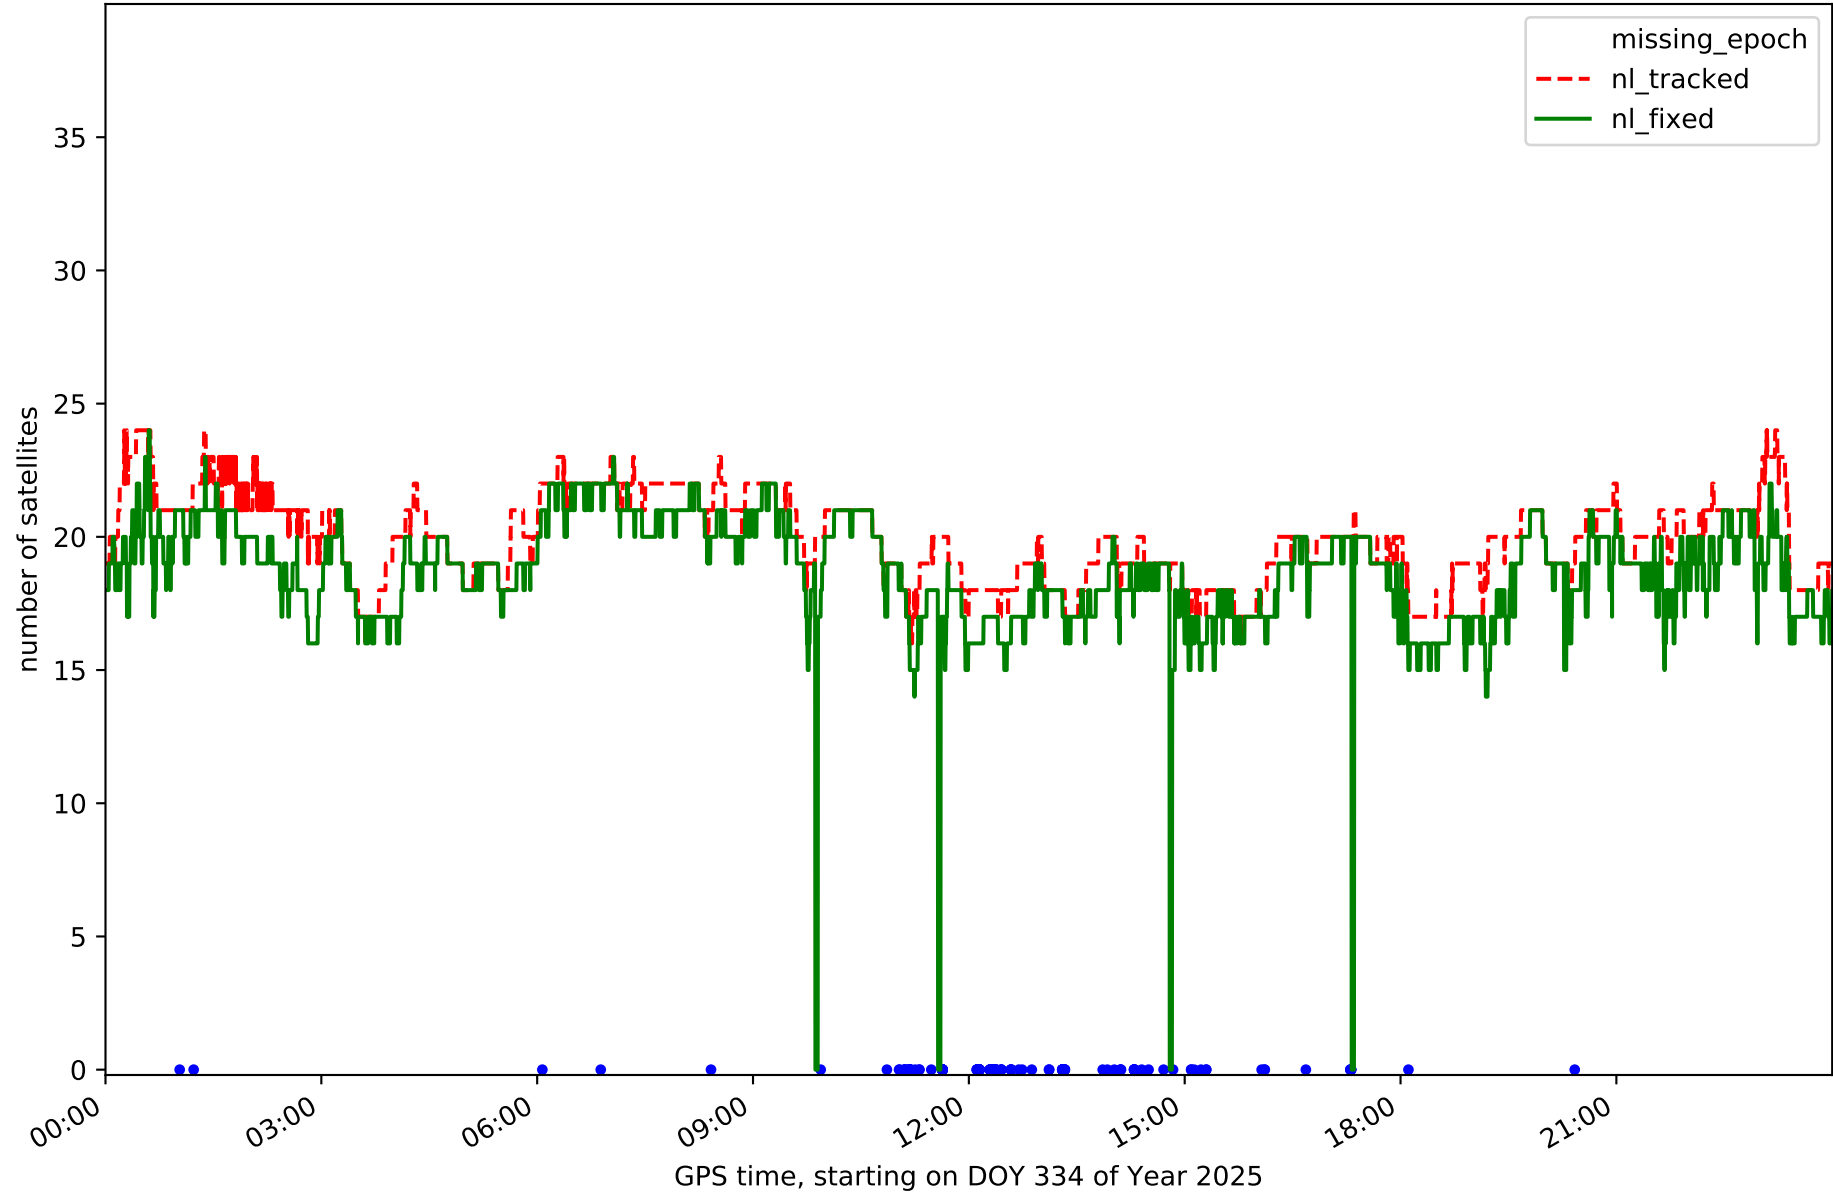


RefCheck for station EH01 in network N32T

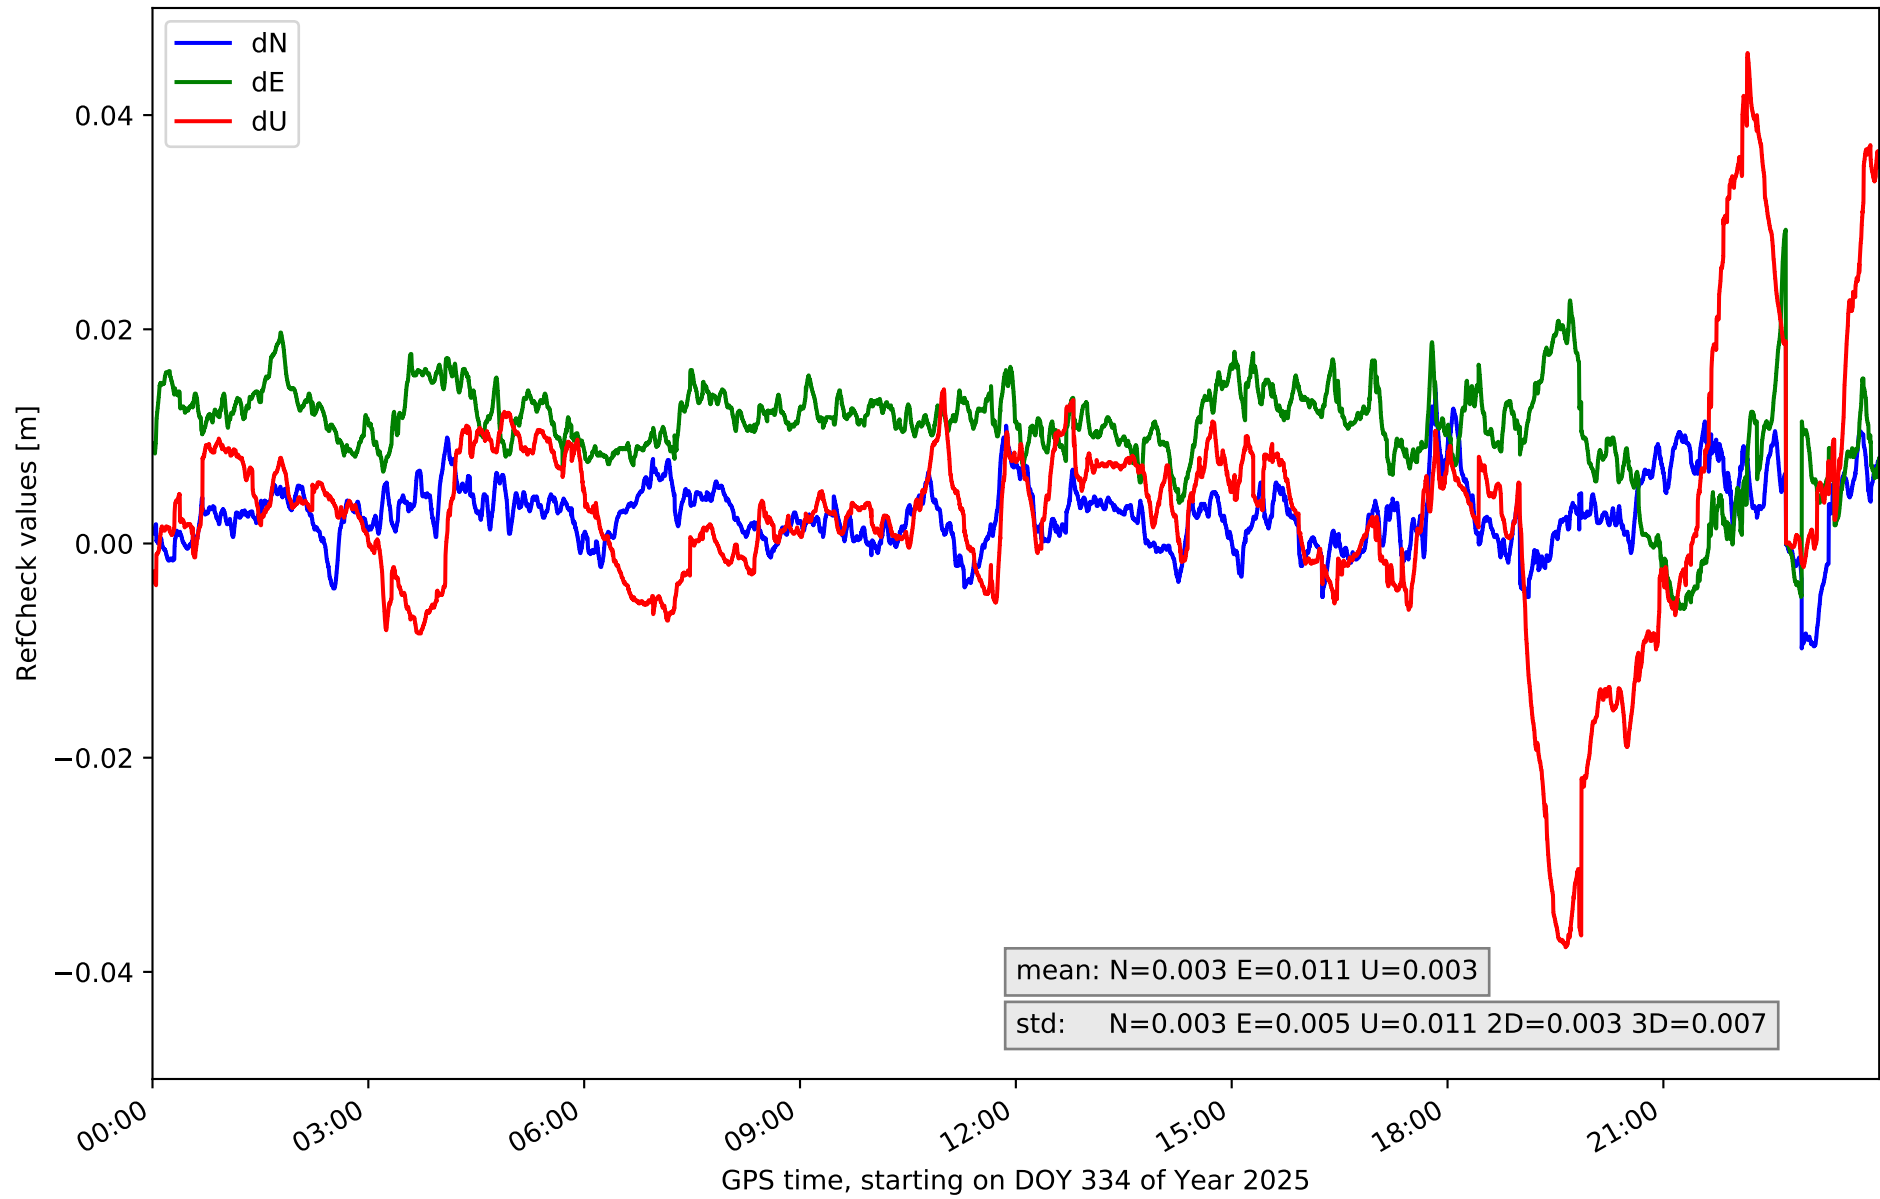


RefCheck for station EH02 in network N32T

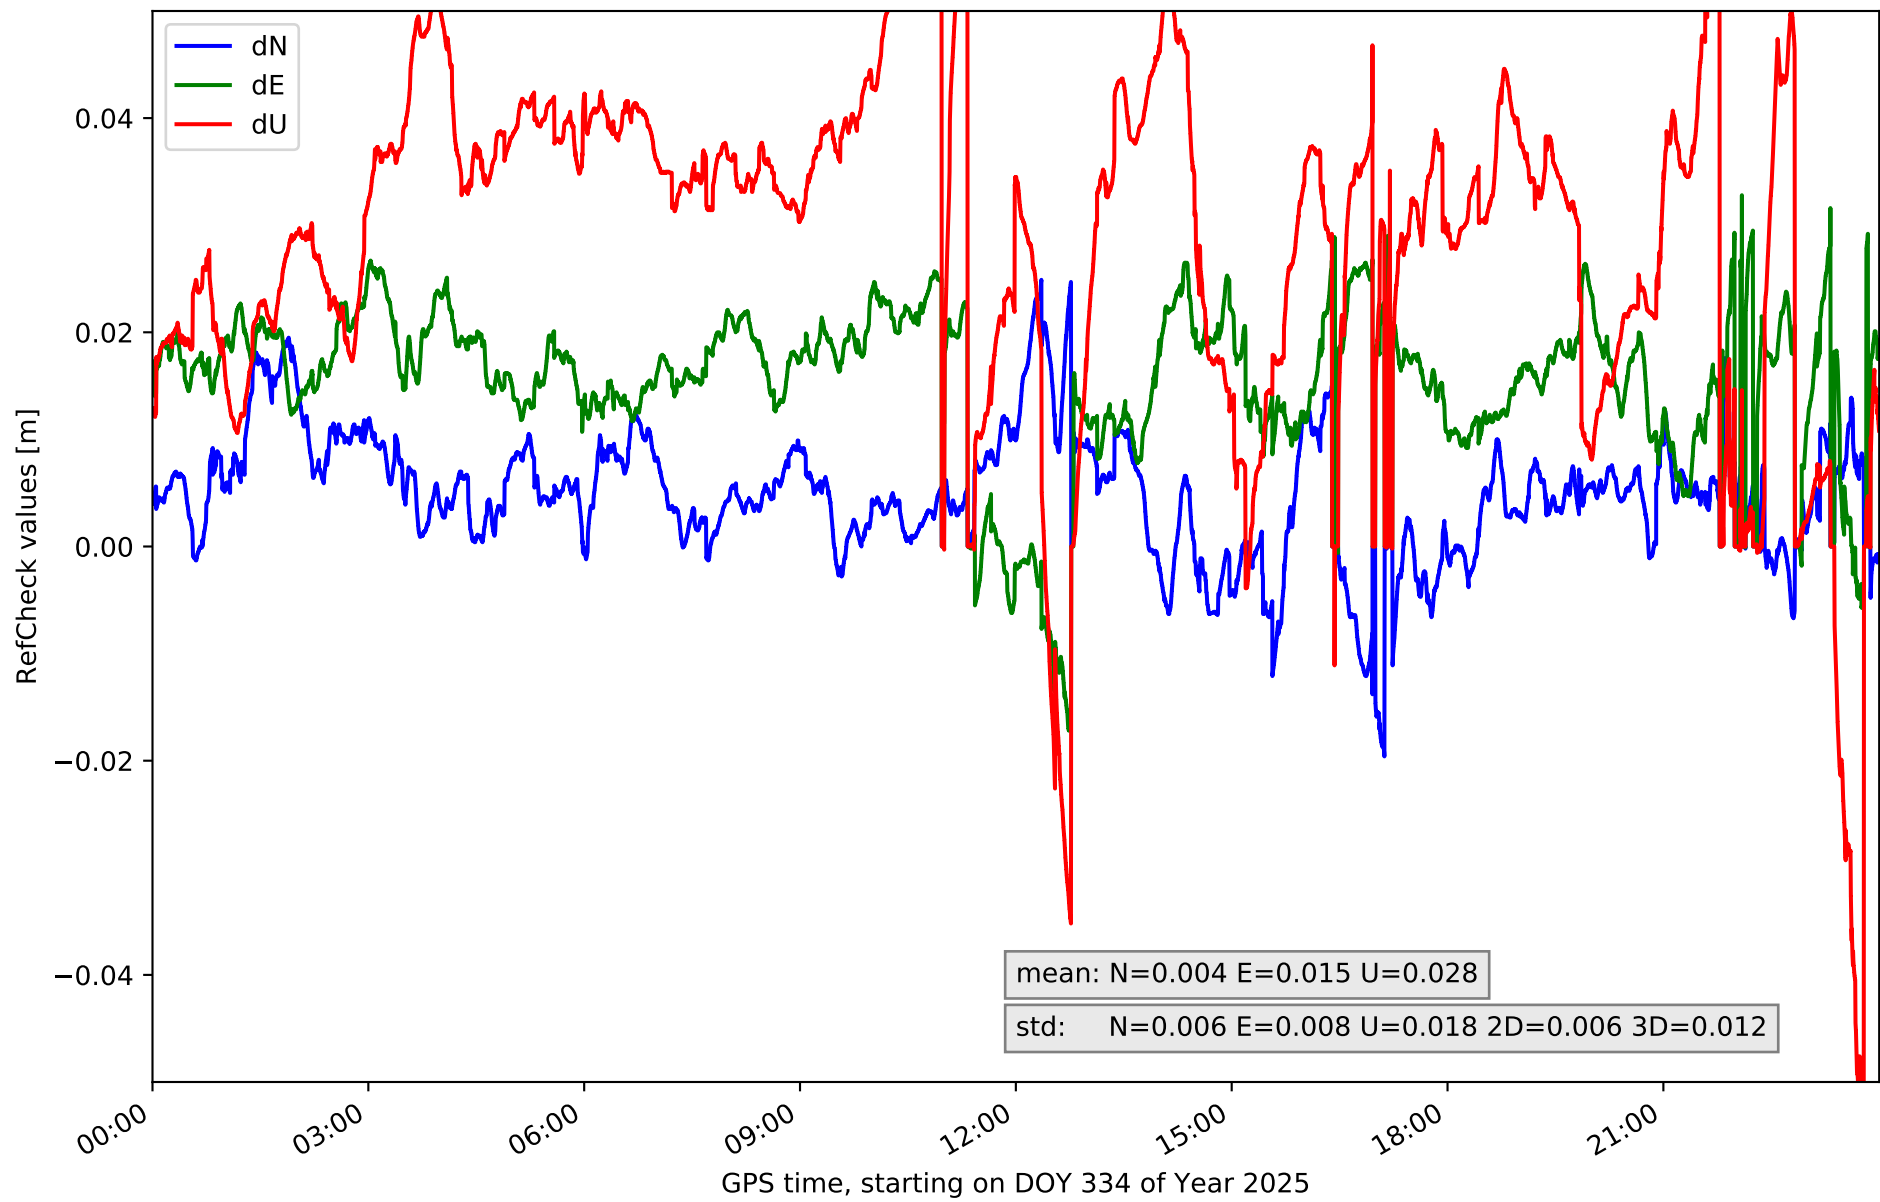


RefCheck for station GOM1 in network N32T

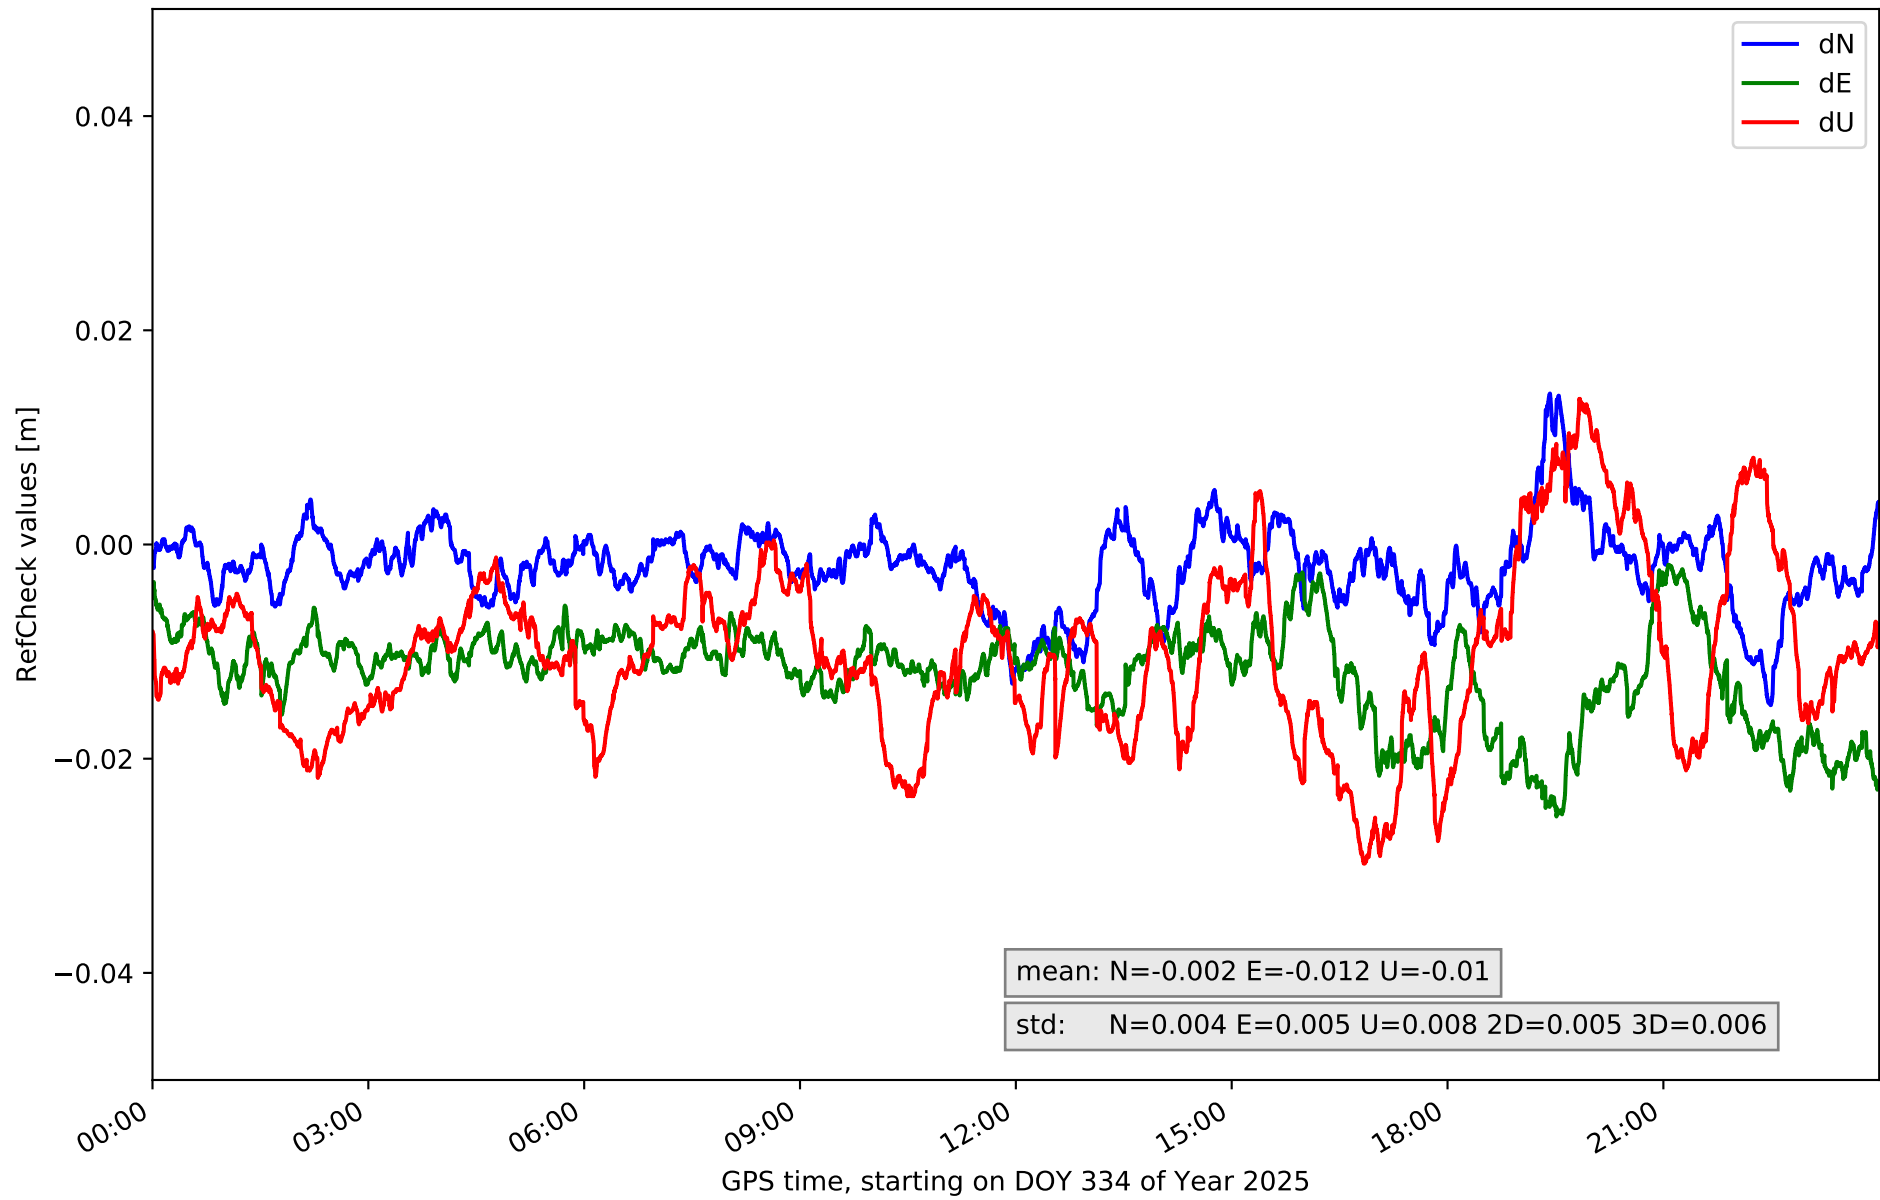


RefCheck for station GOME in network N32T

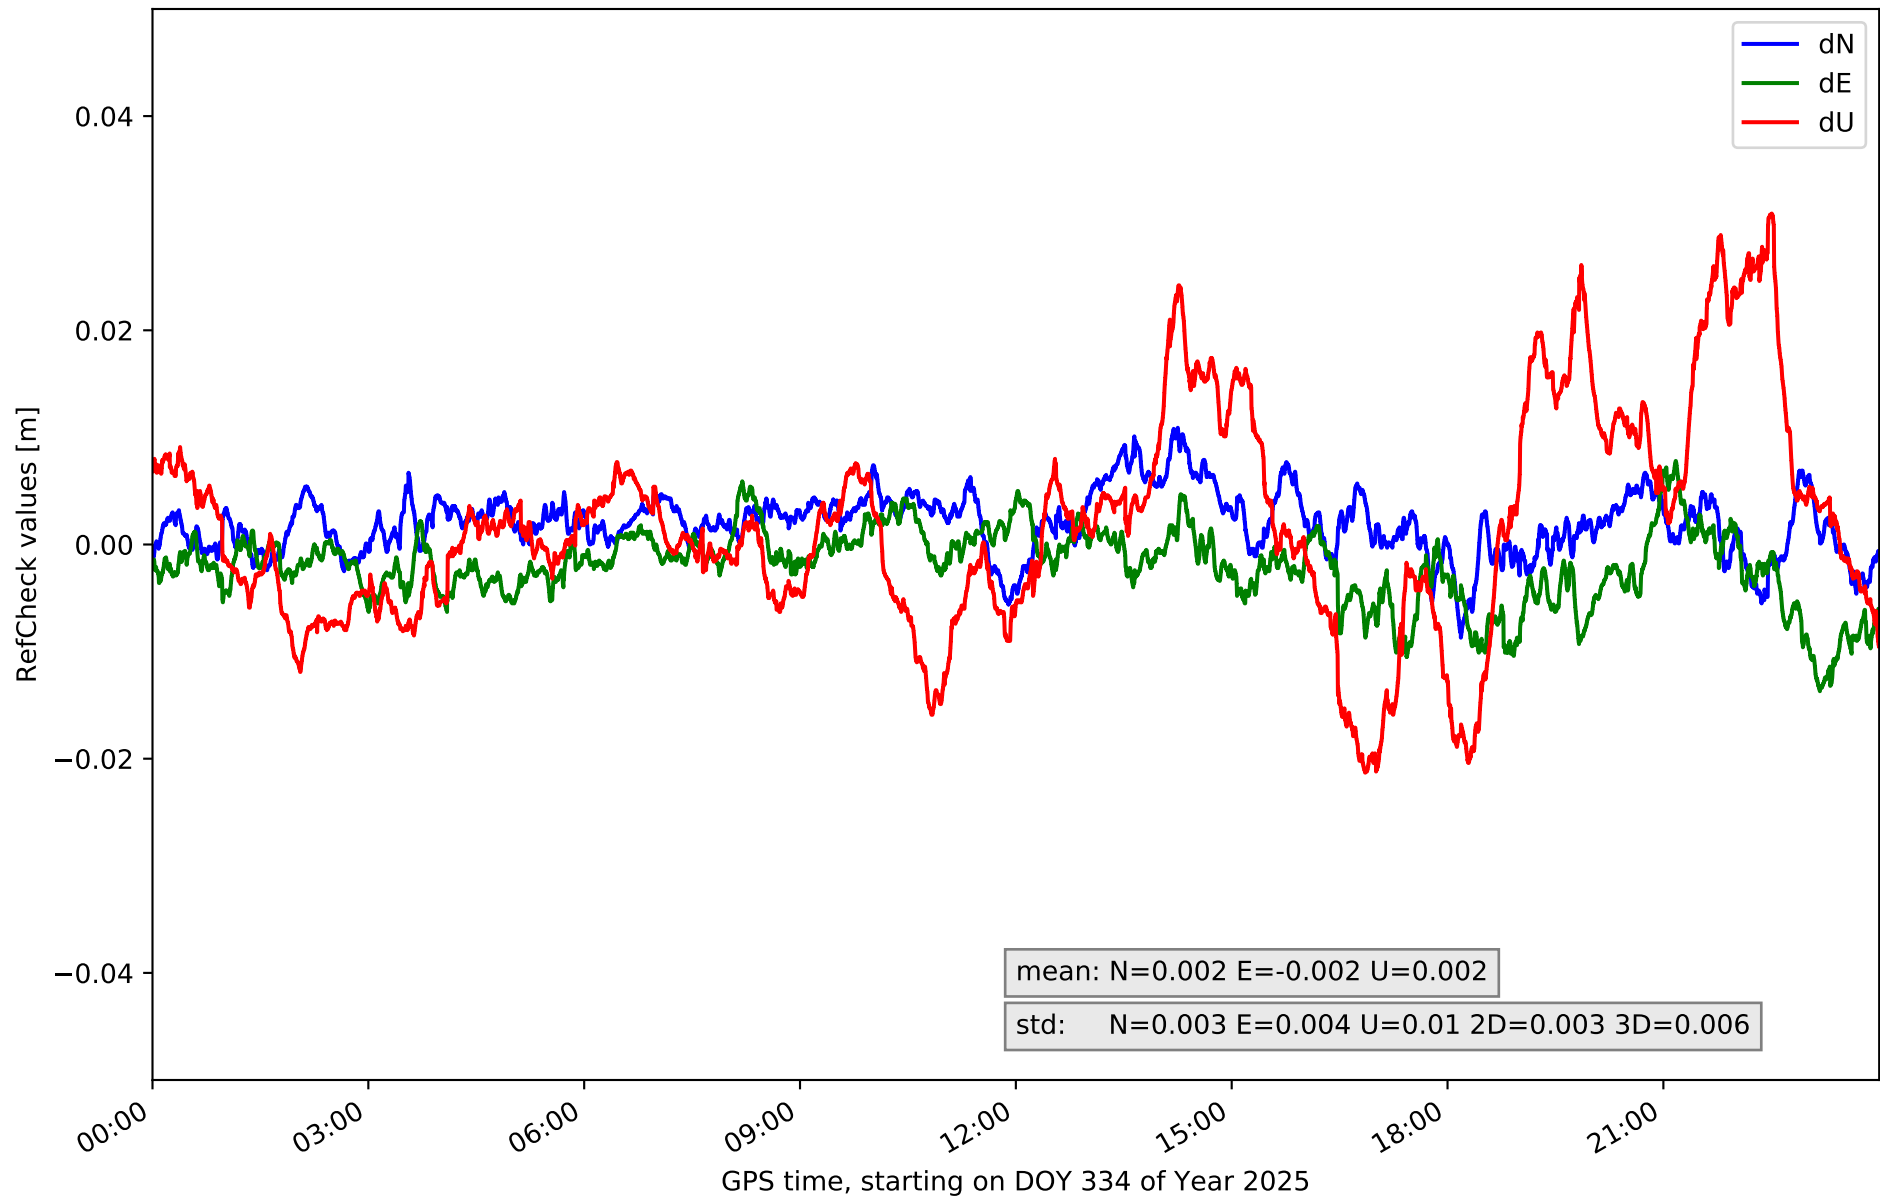


RefCheck for station IZAN in network N32T

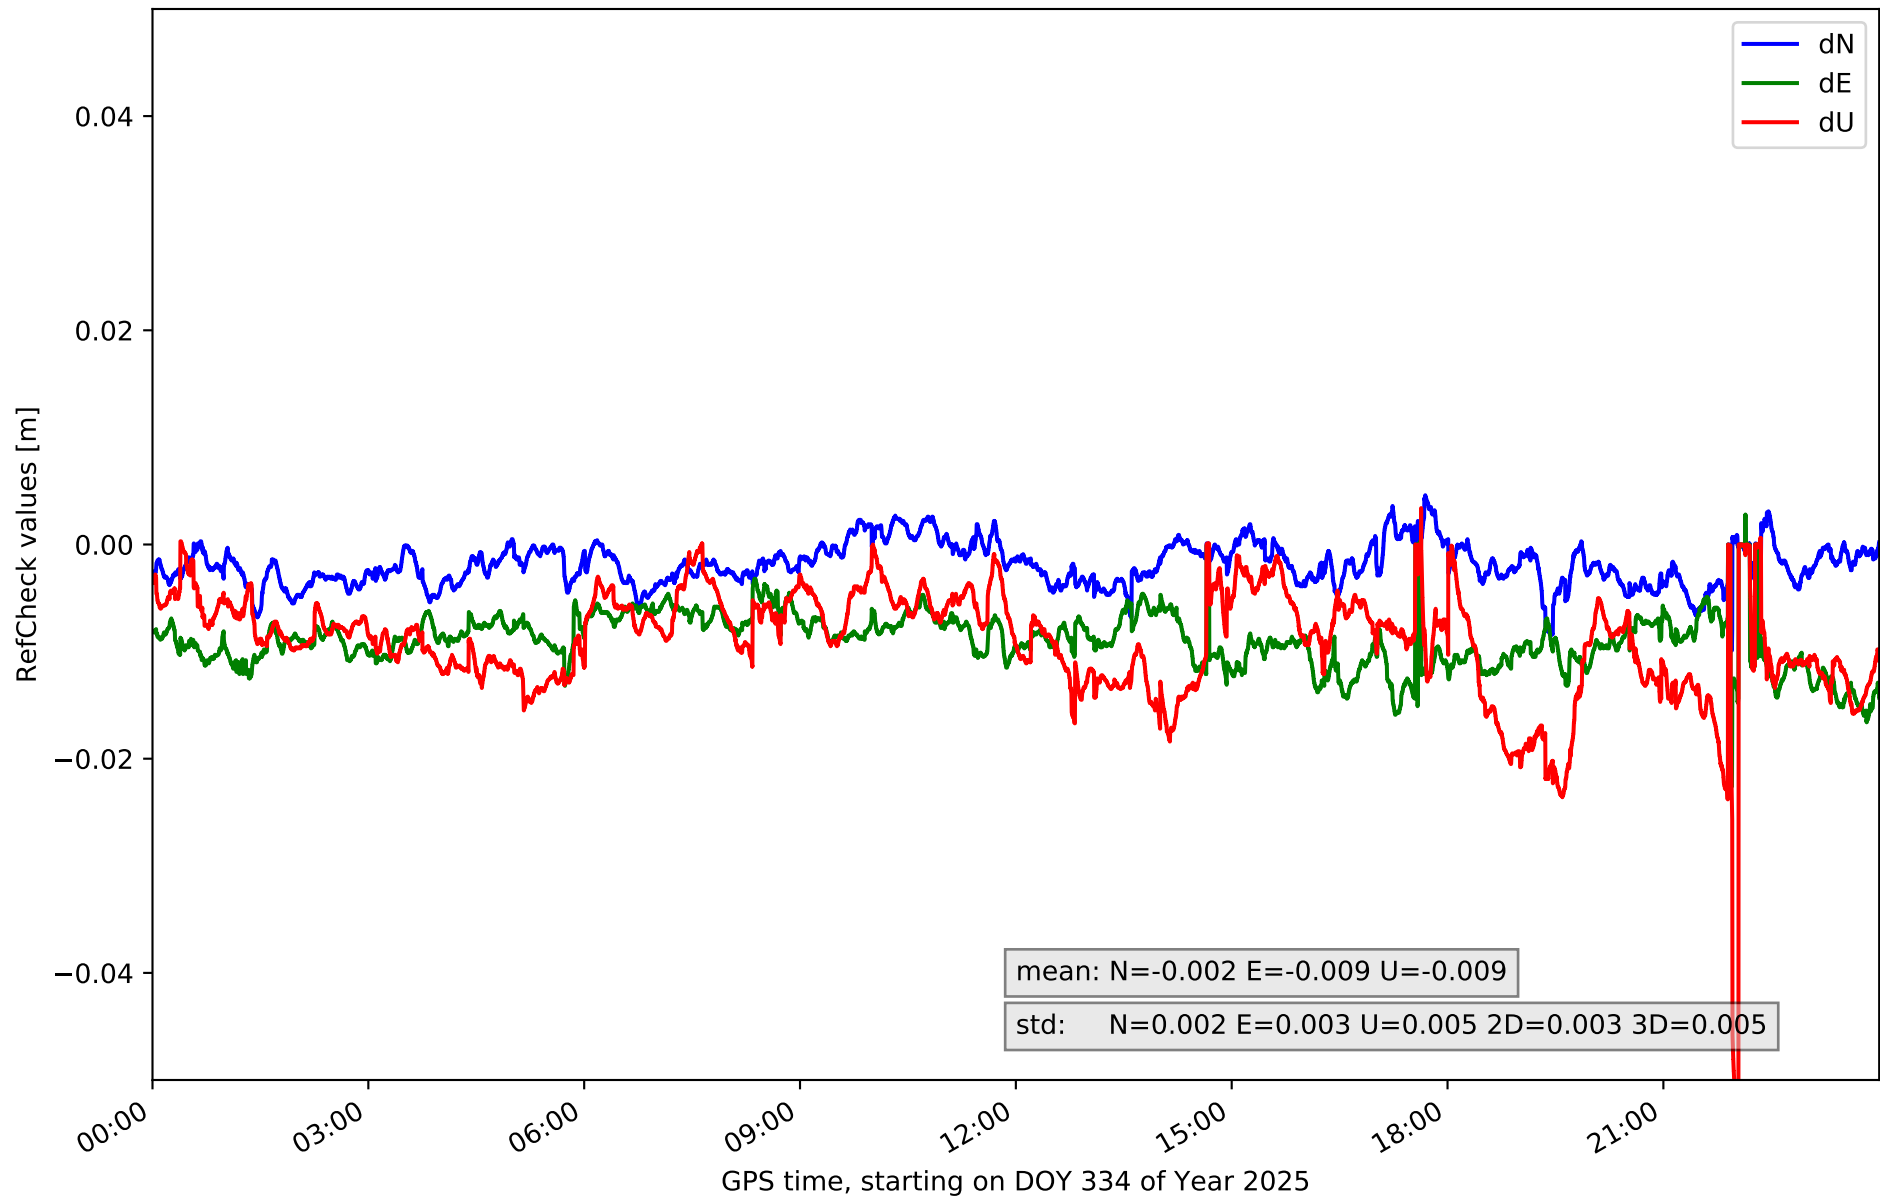


RefCheck for station LP01 in network N32T

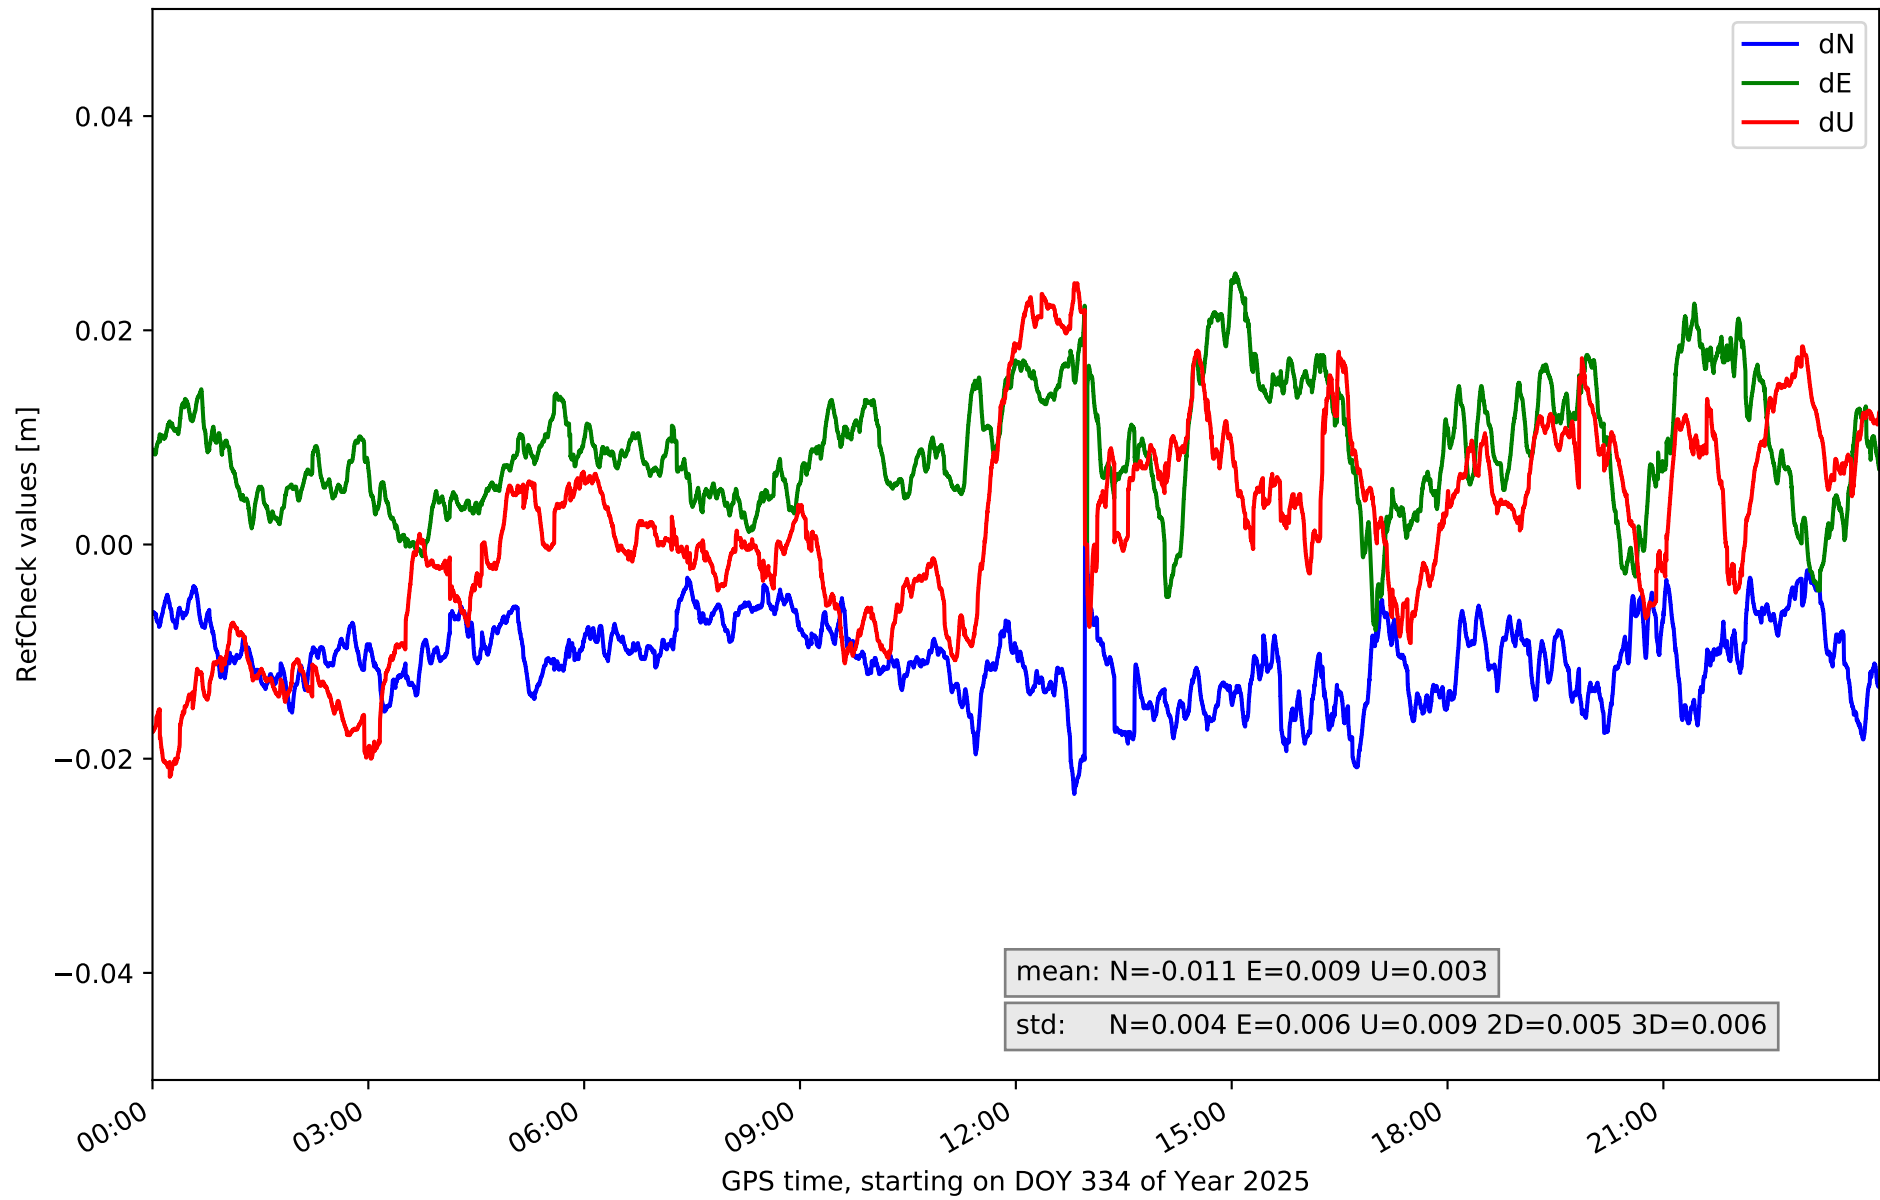


RefCheck for station LP03 in network N32T

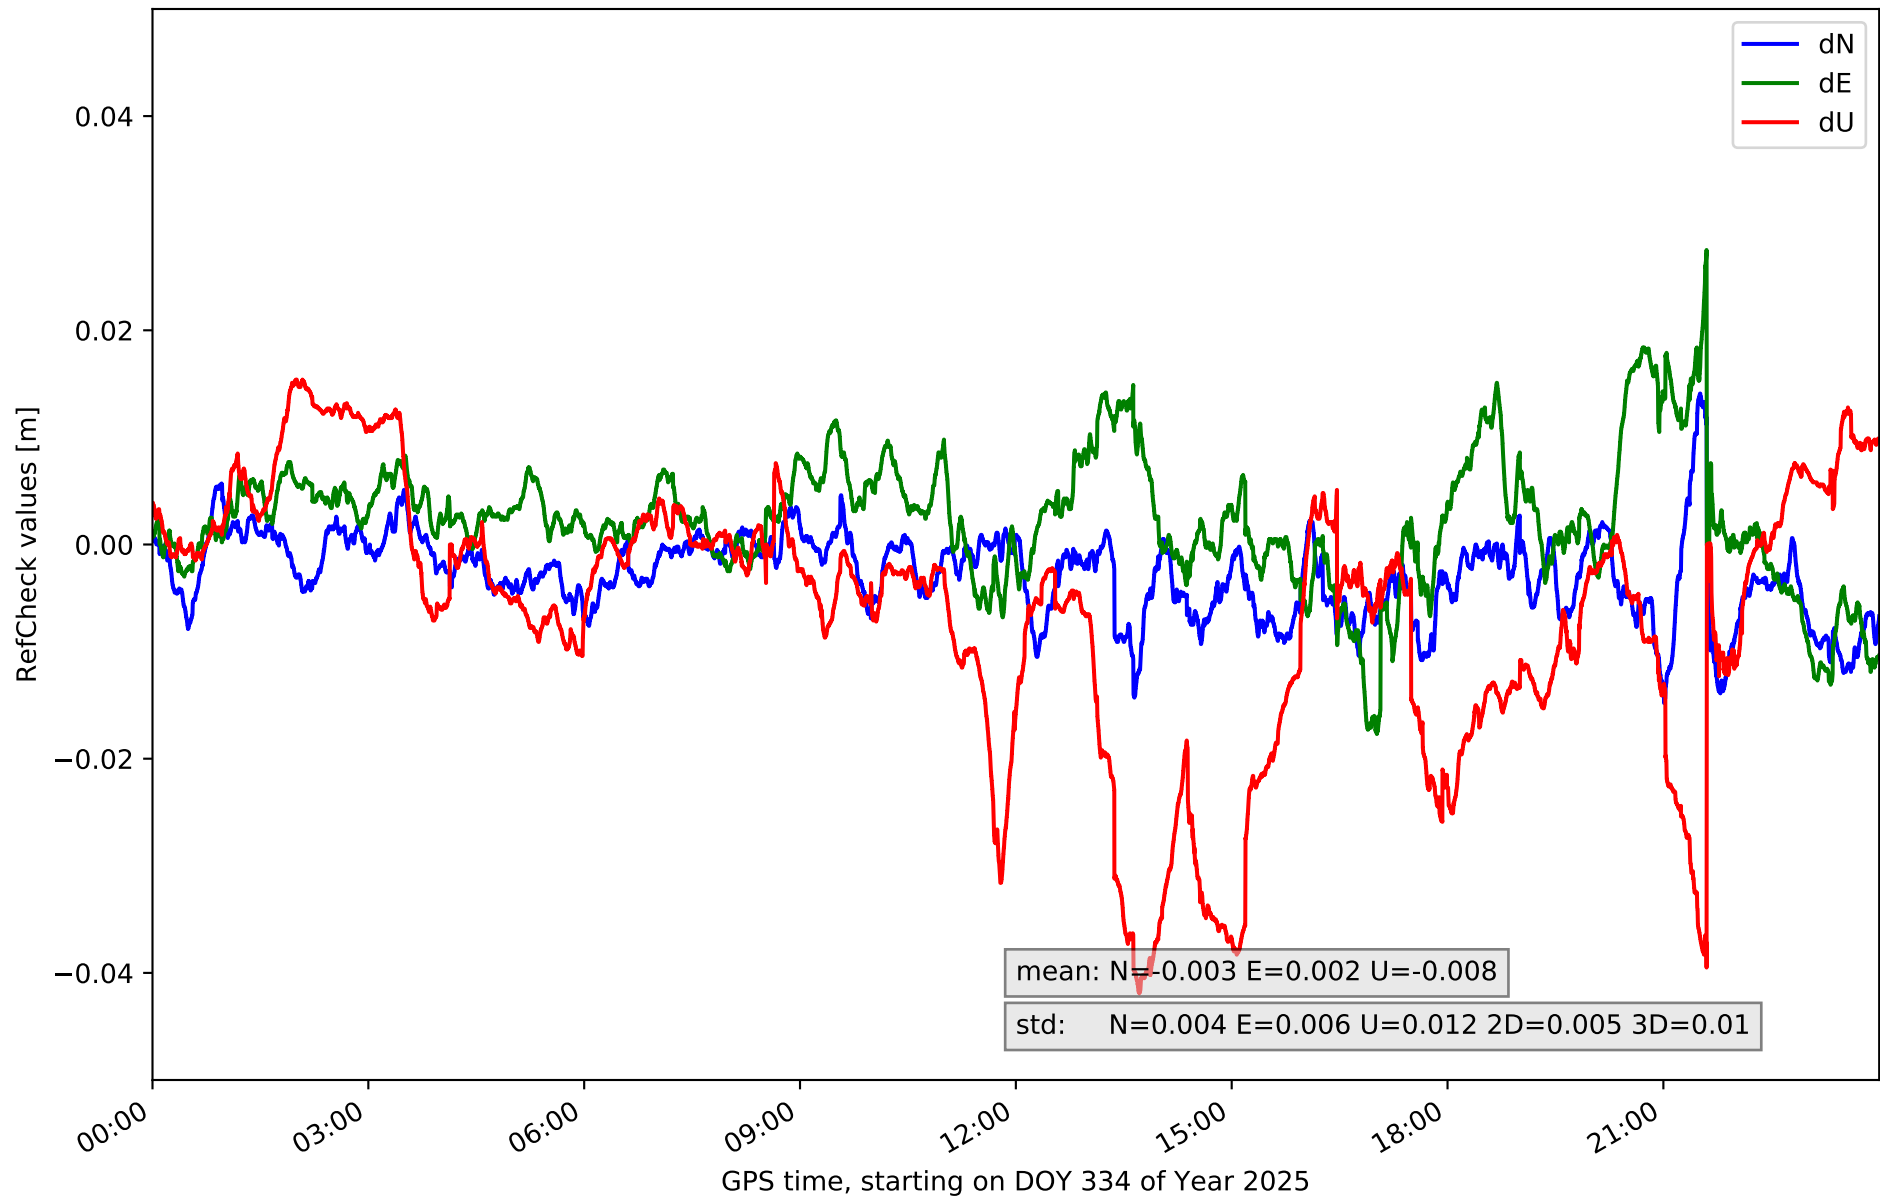


RefCheck for station LPAL in network N32T

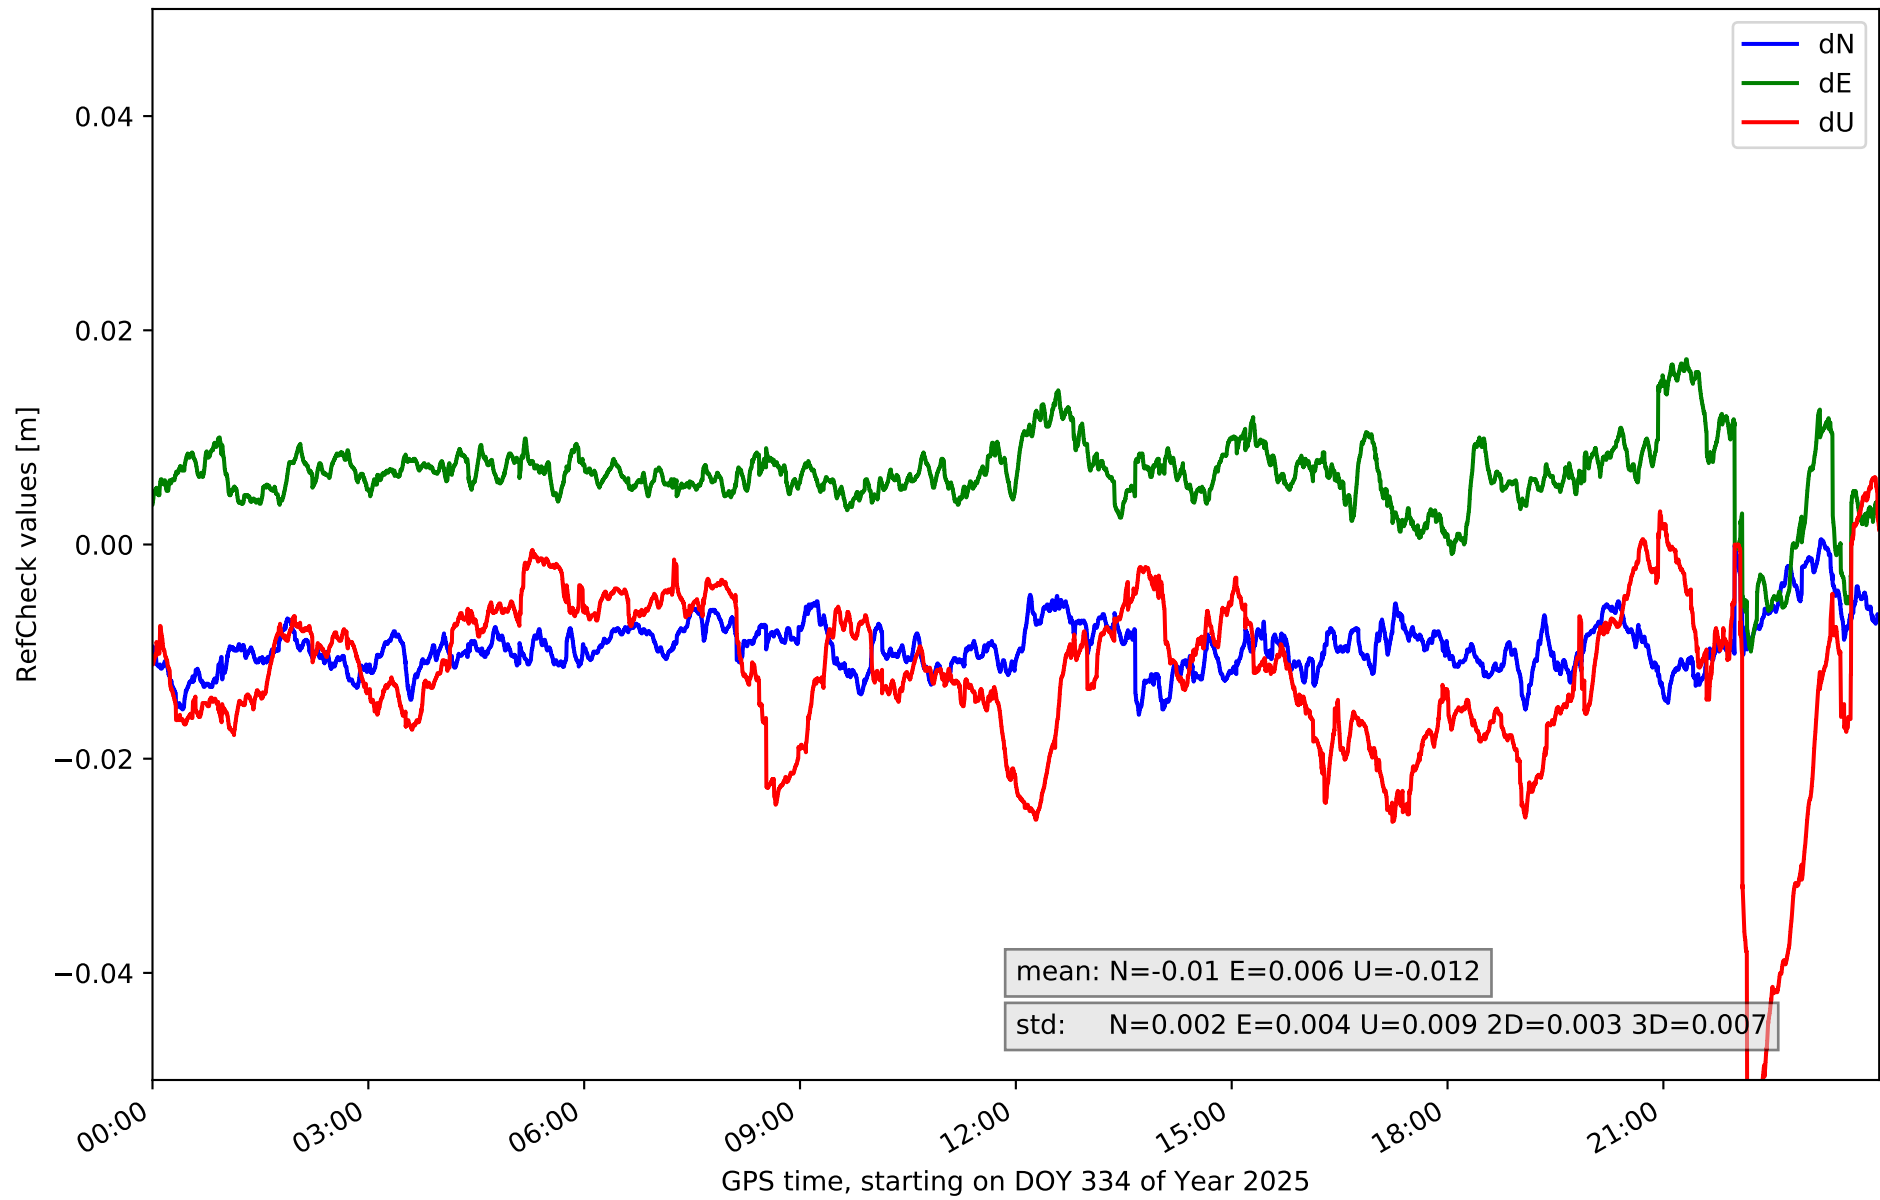


RefCheck for station LRES in network N32T

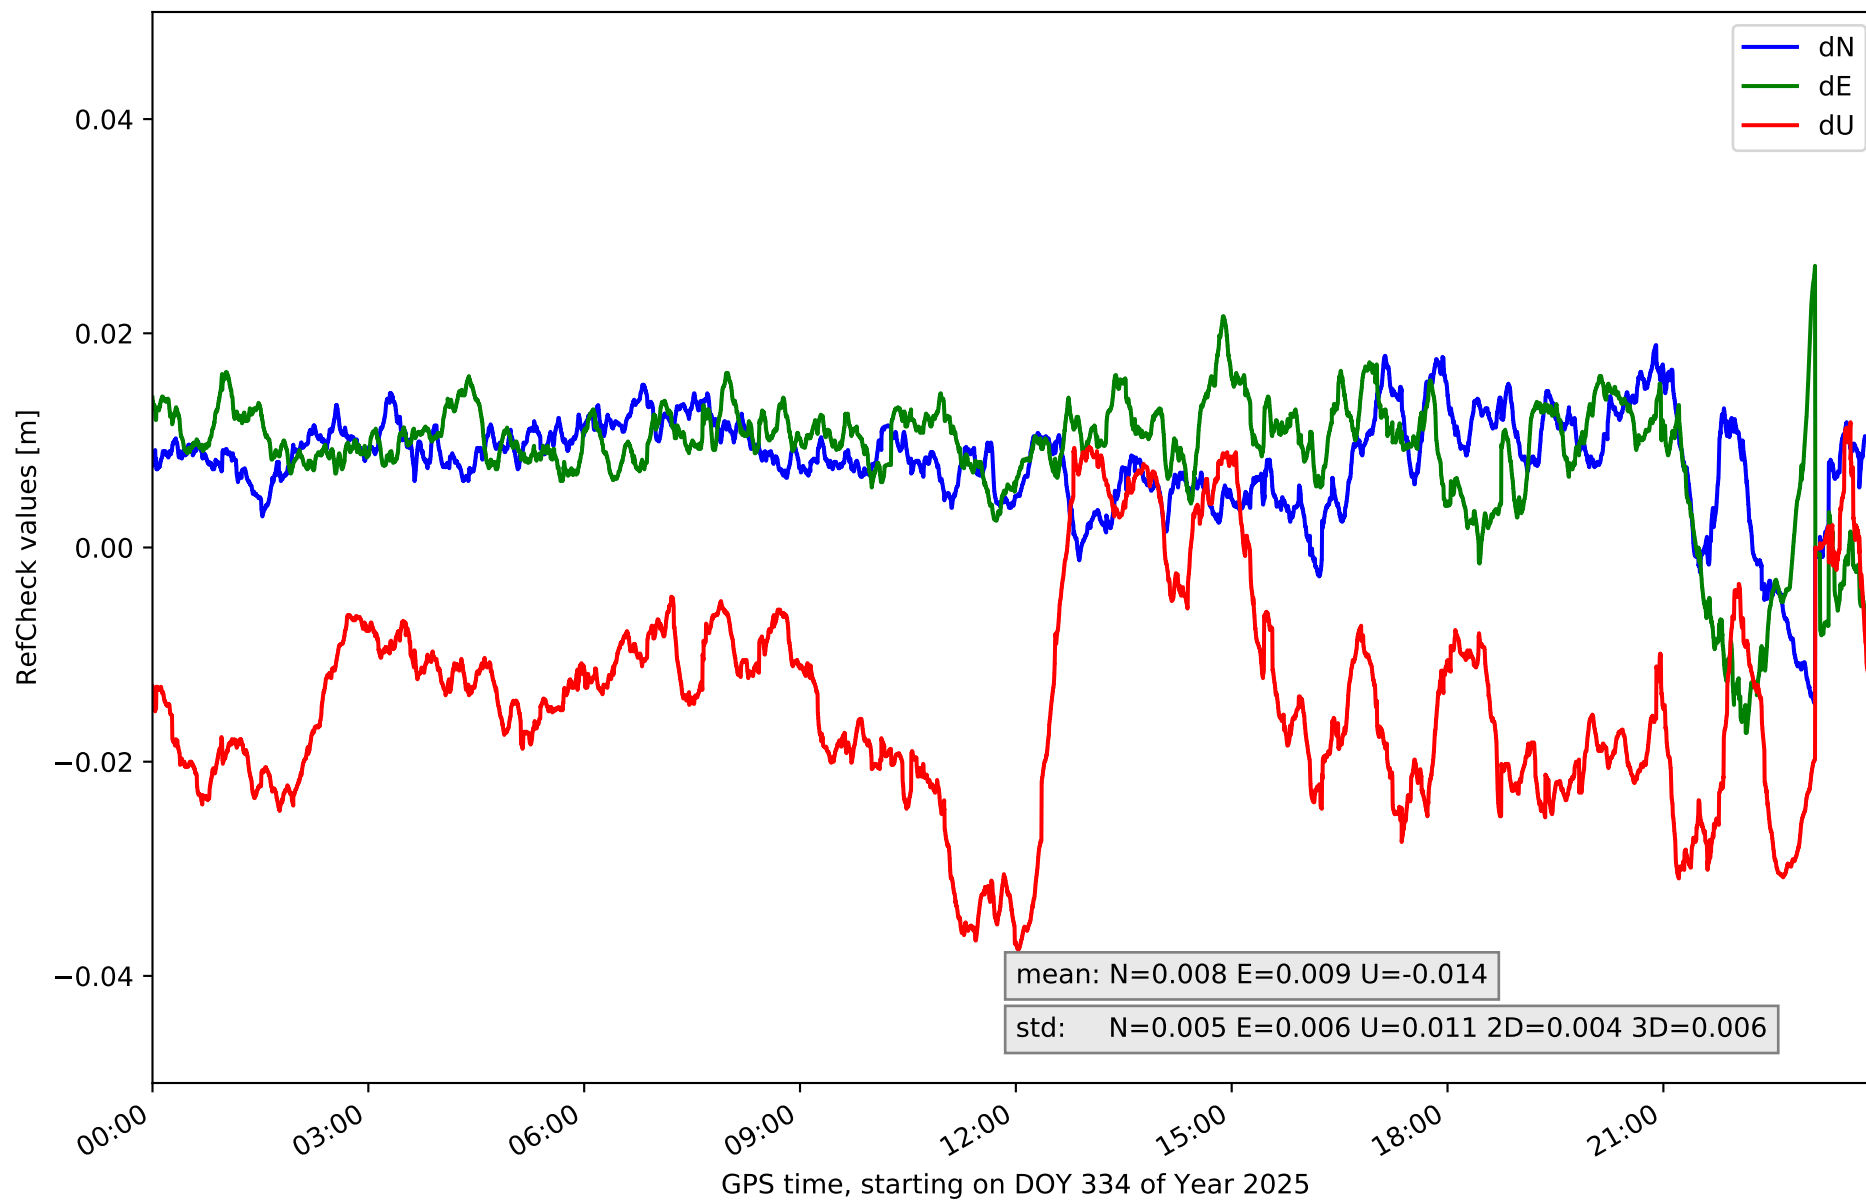


RefCheck for station TN01 in network N32T

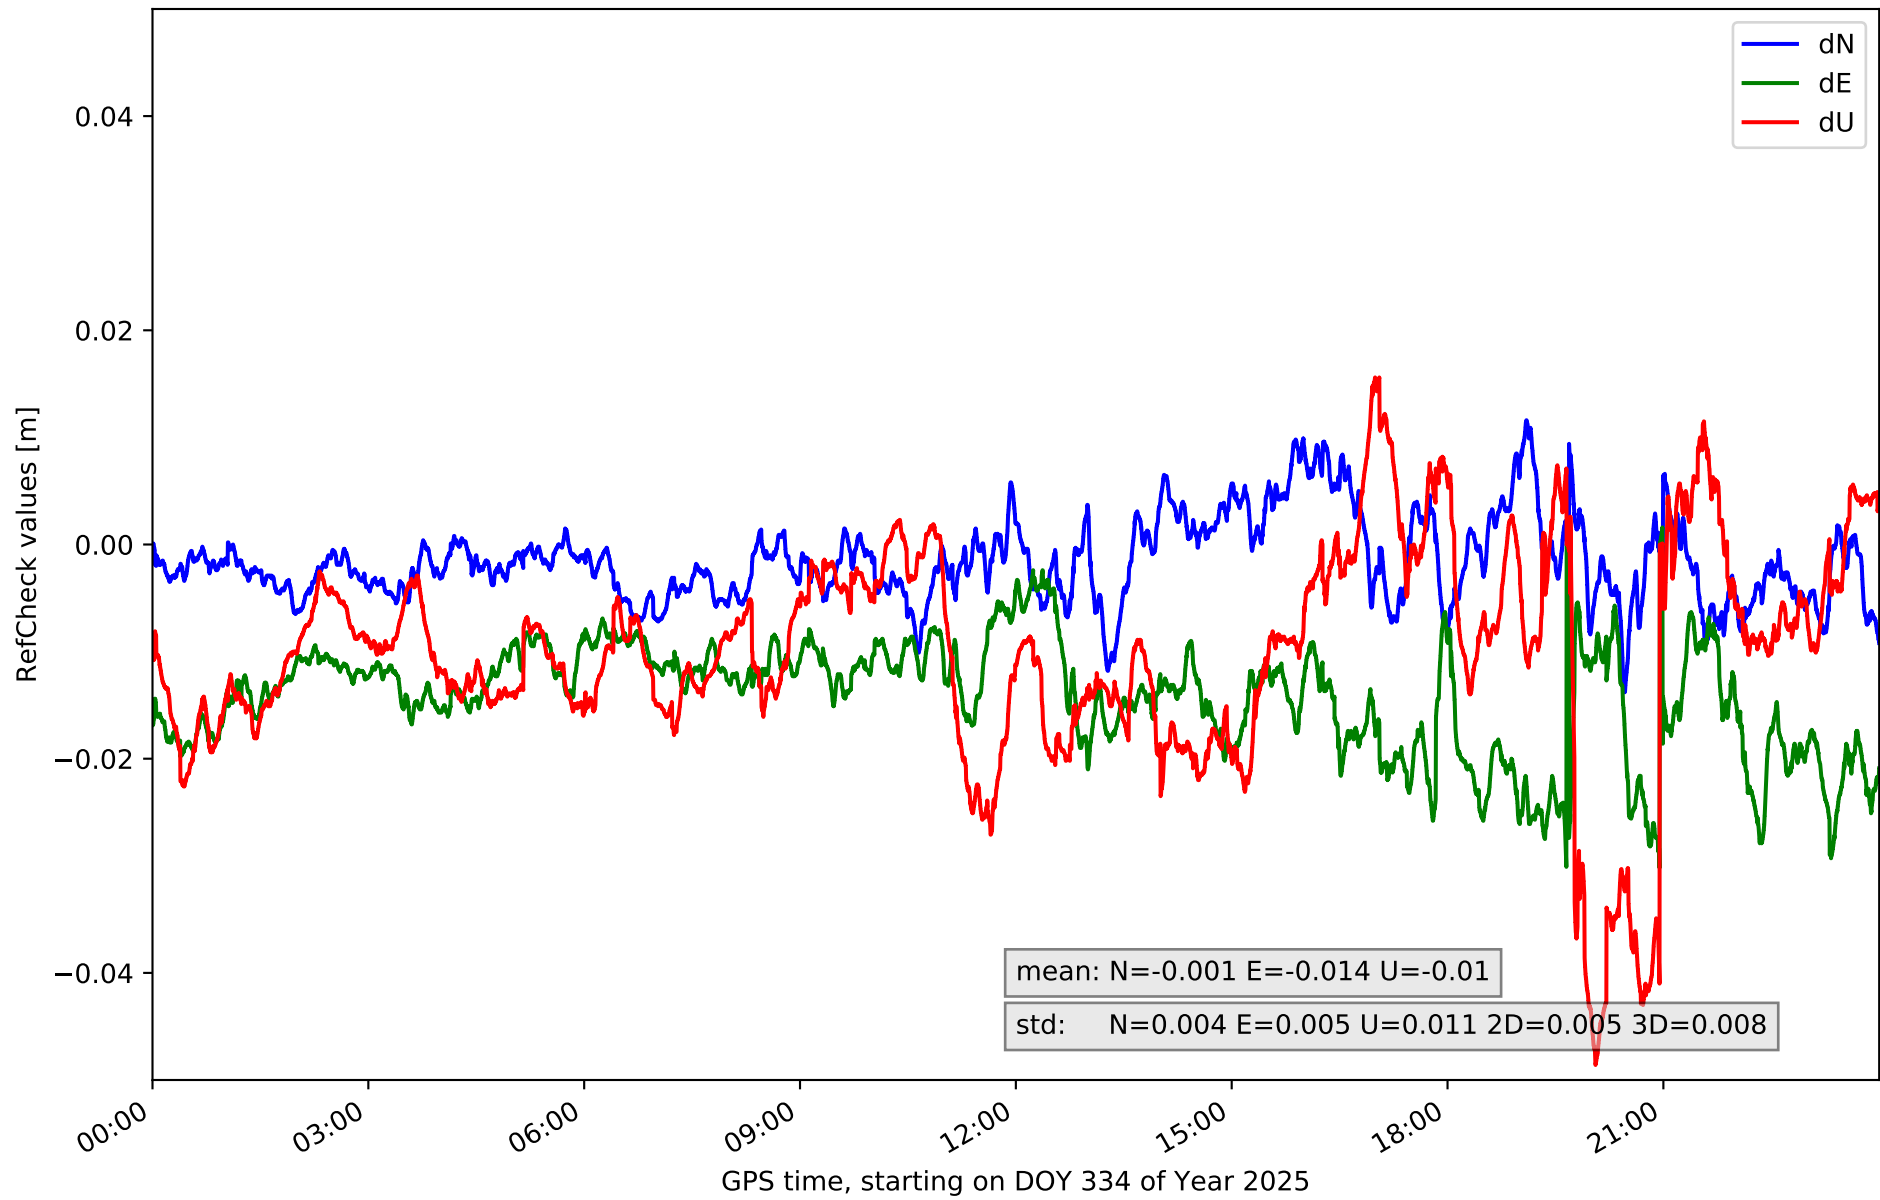


RefCheck for station TN02 in network N32T

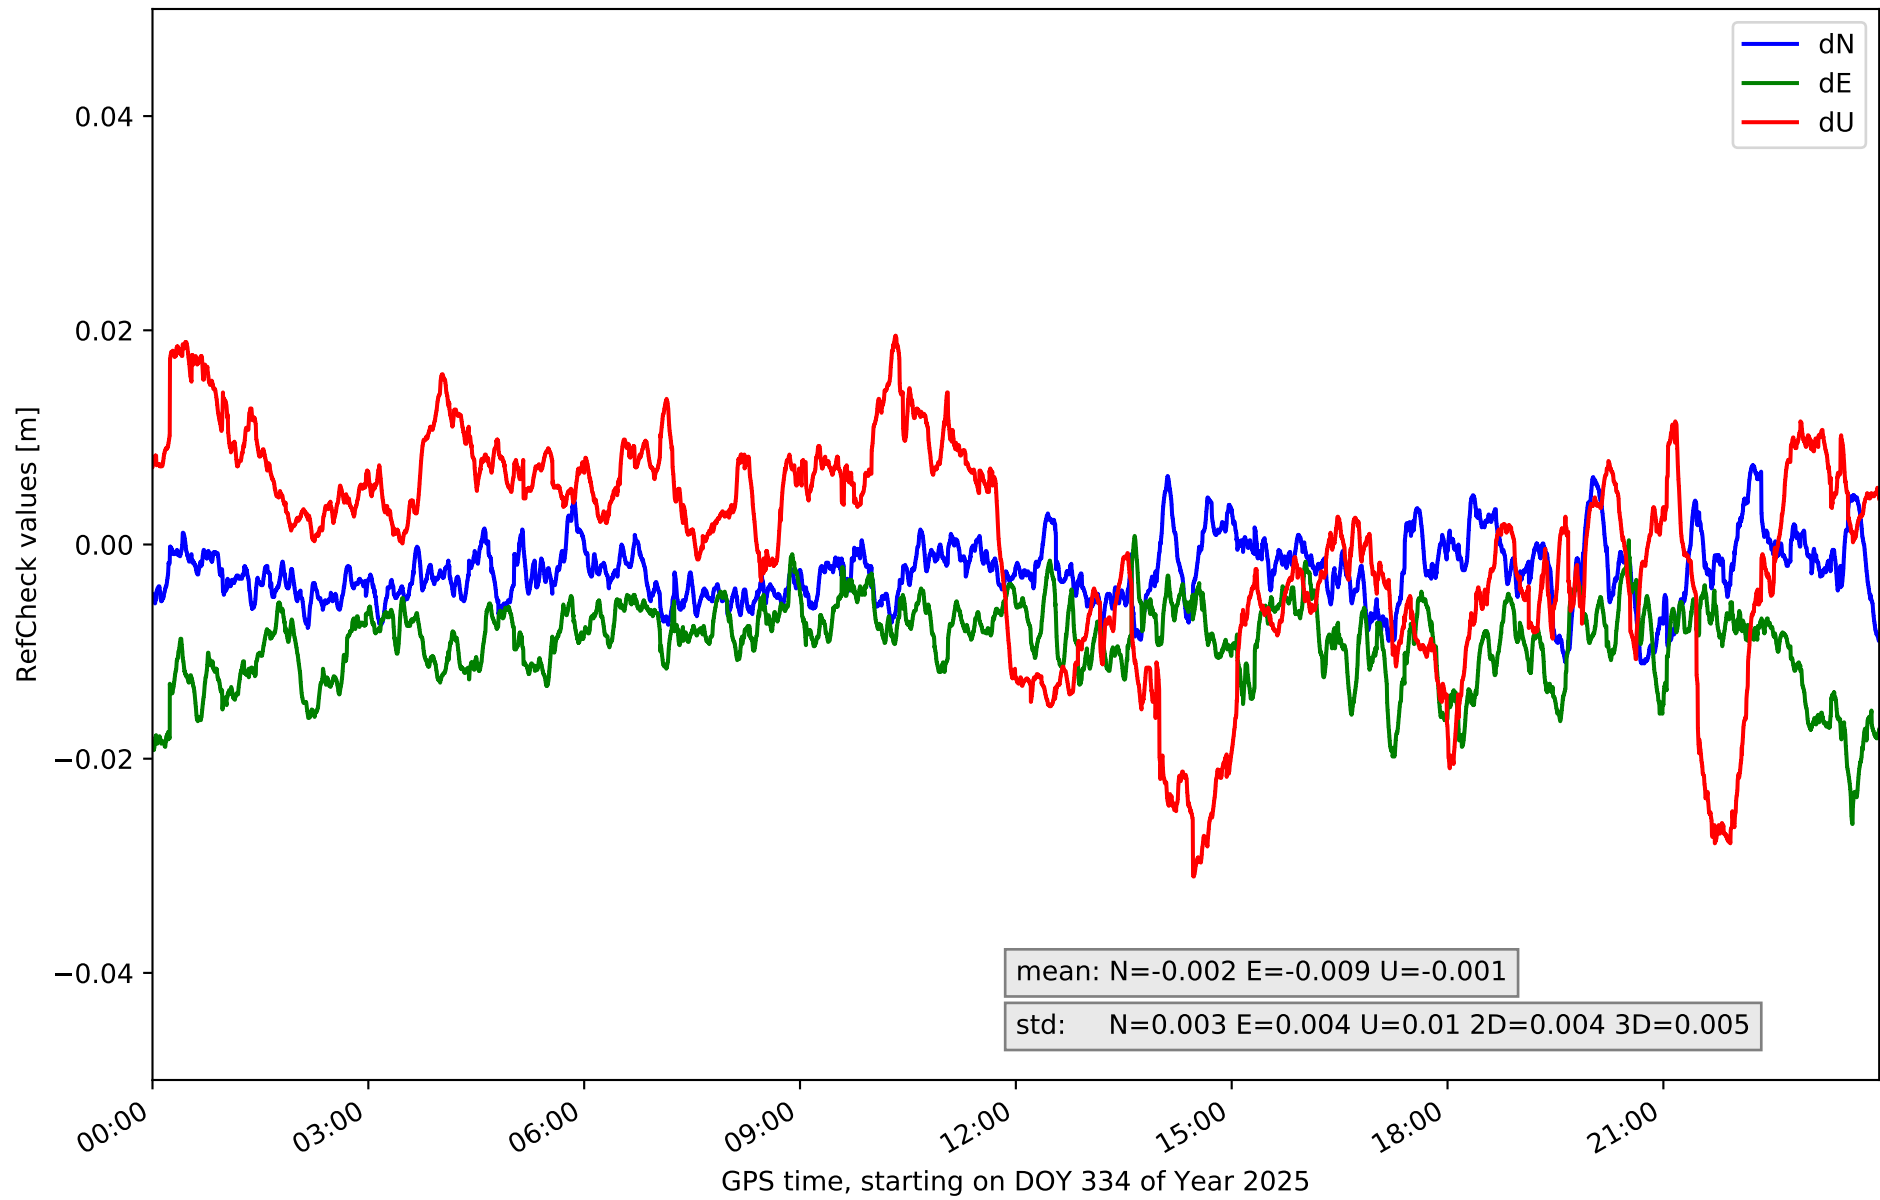


RefCheck for station TN03 in network N32T

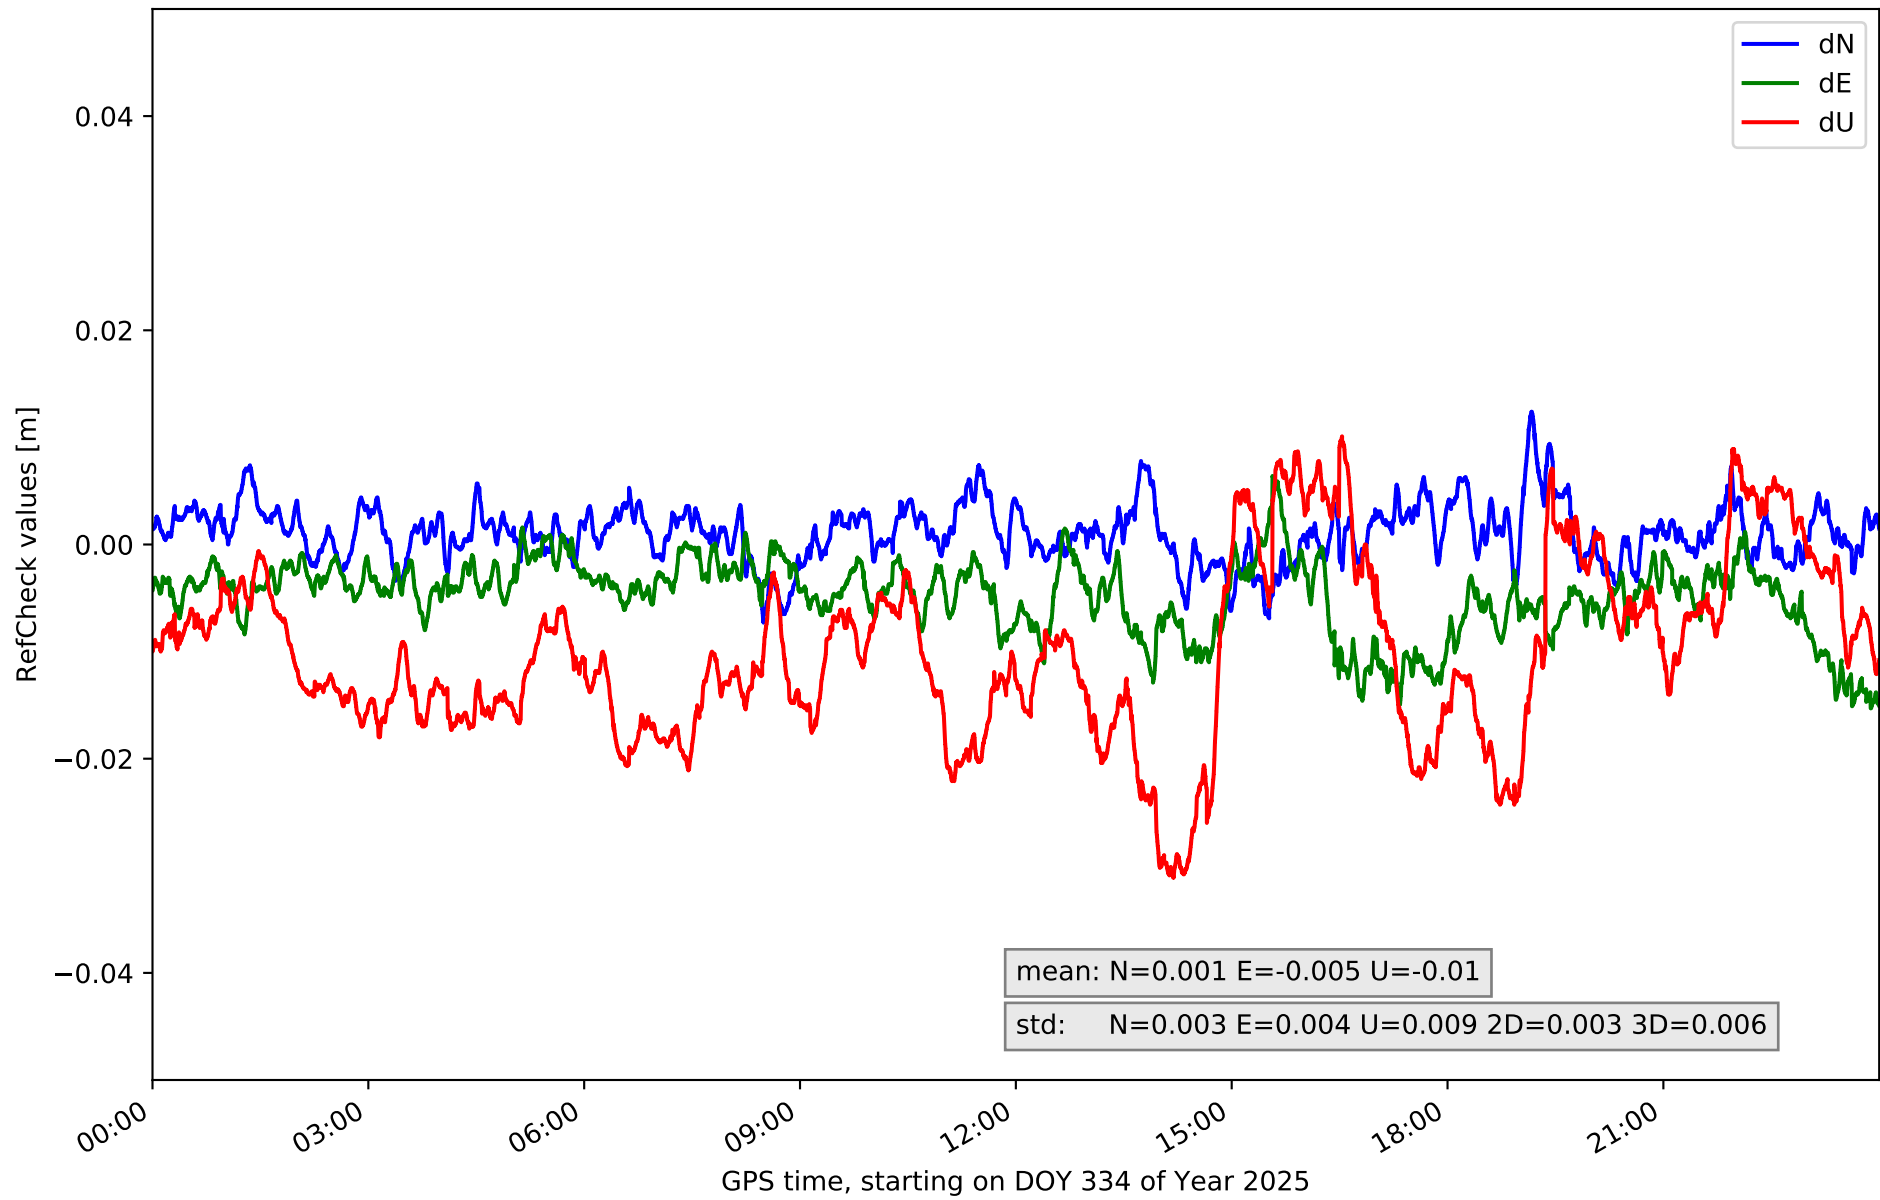


RefCheck for station TN06 in network N32T

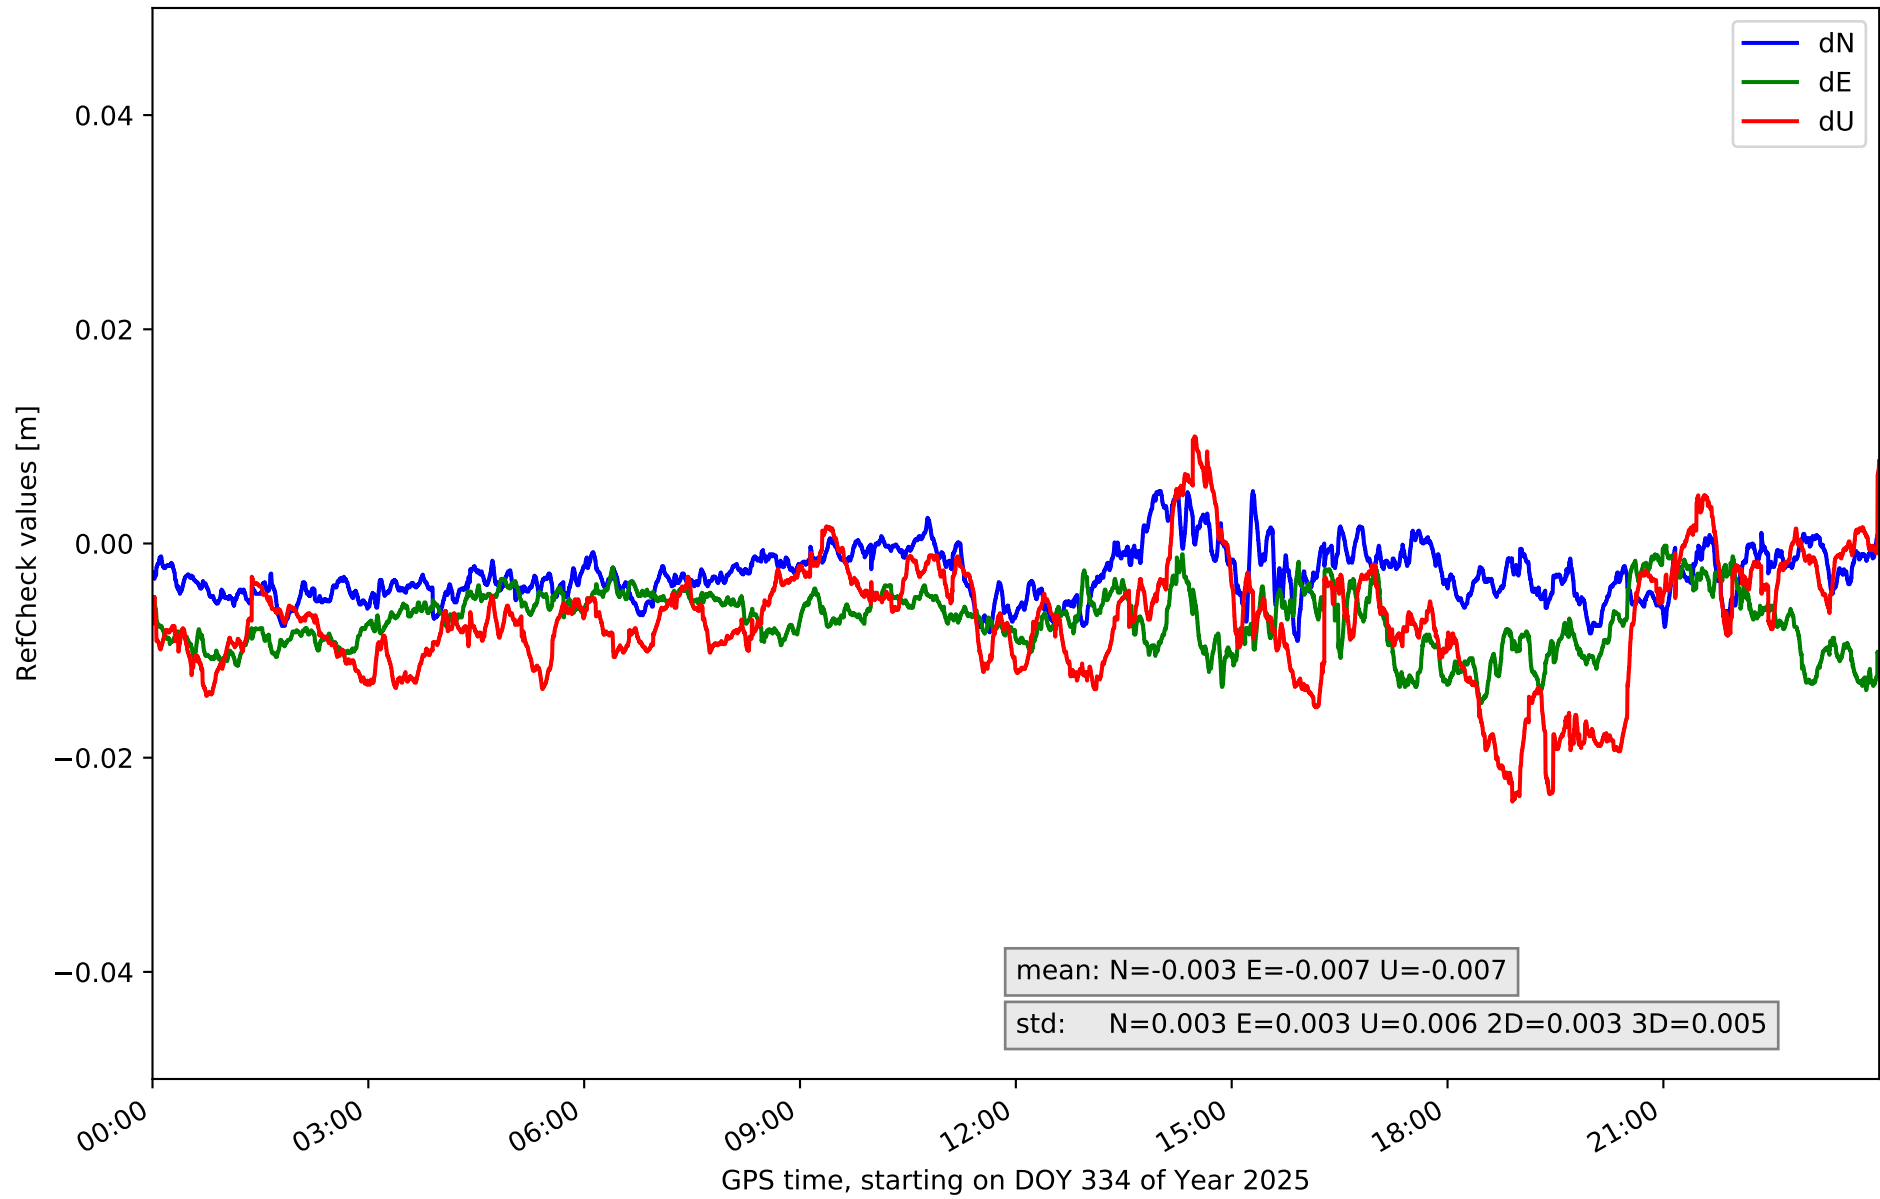

RefCheck for station TN09 in network N32T

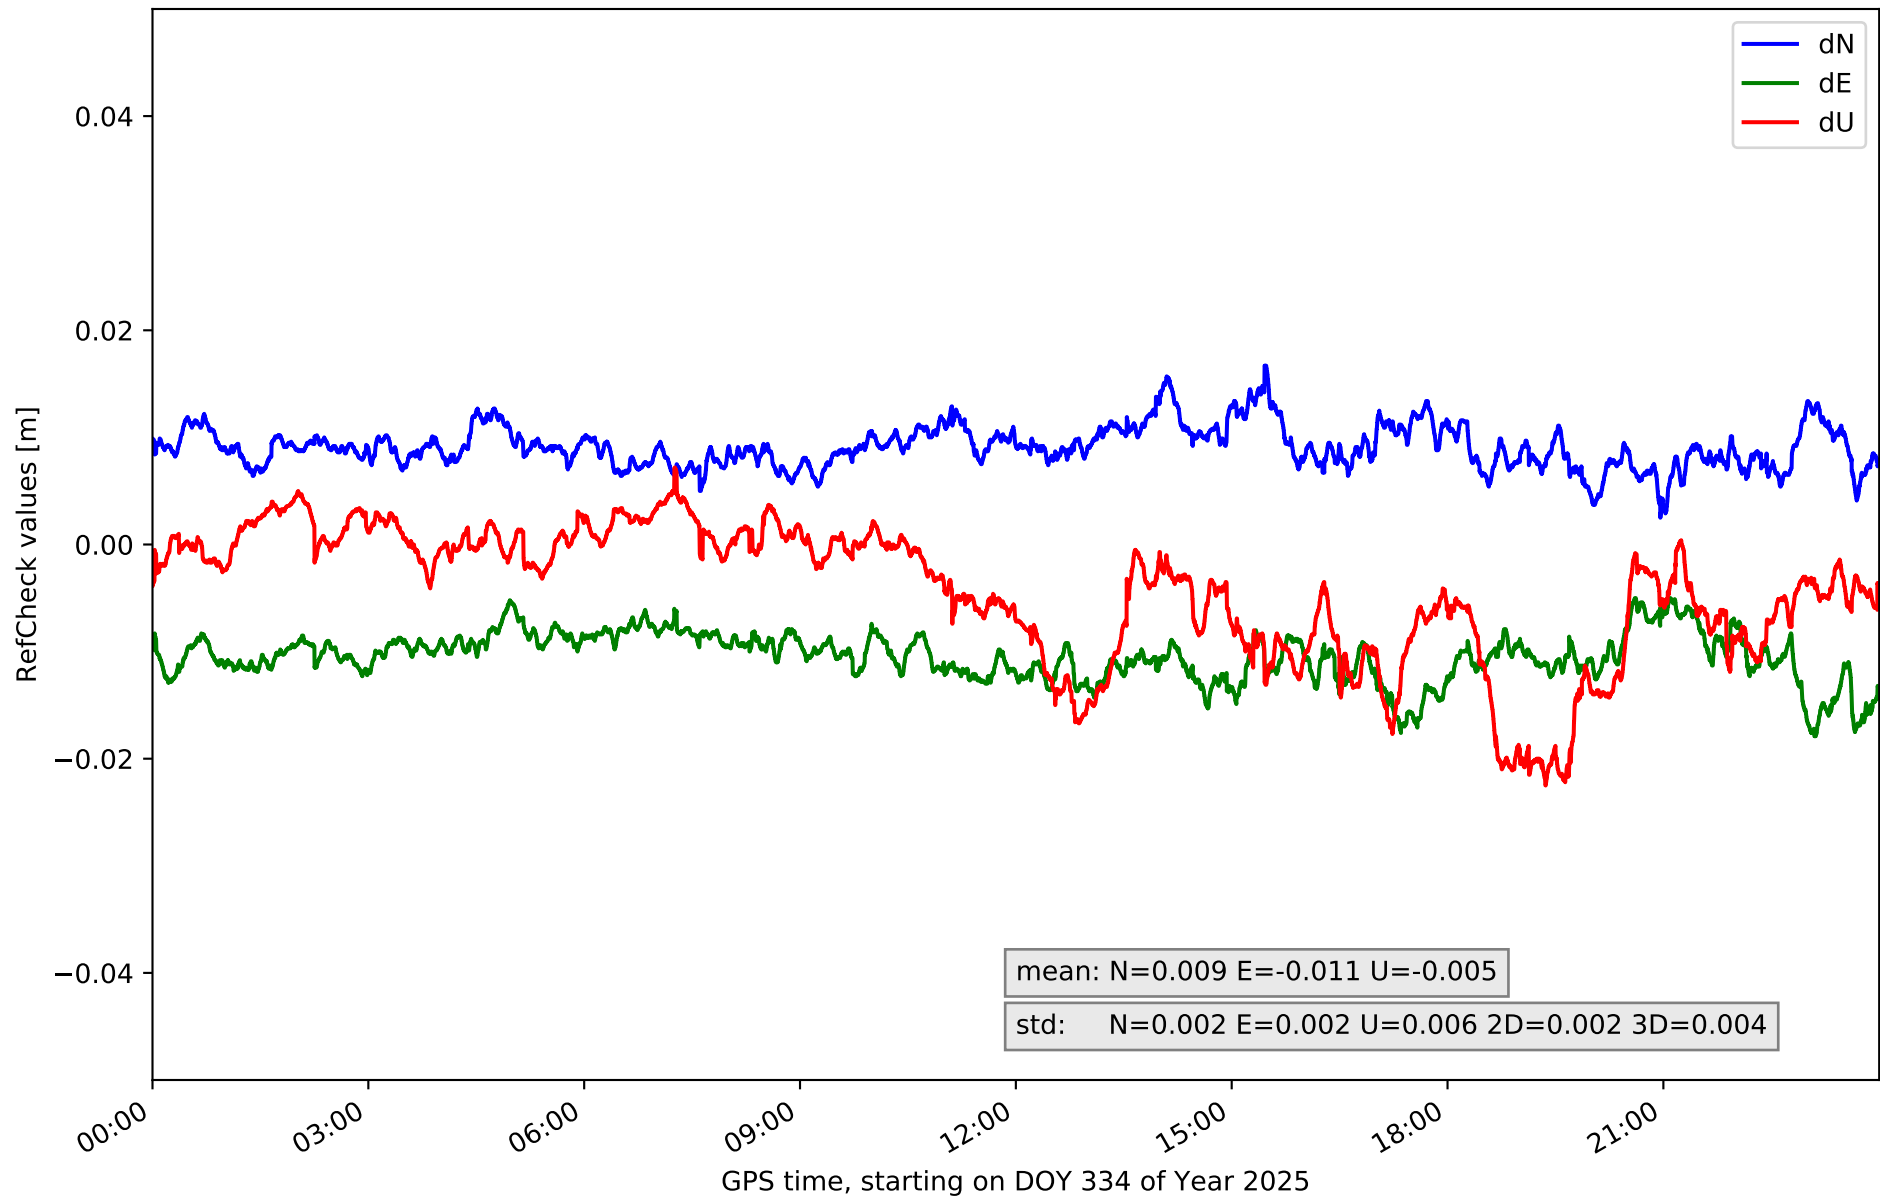

RefCheck for station TE11 in network N32T

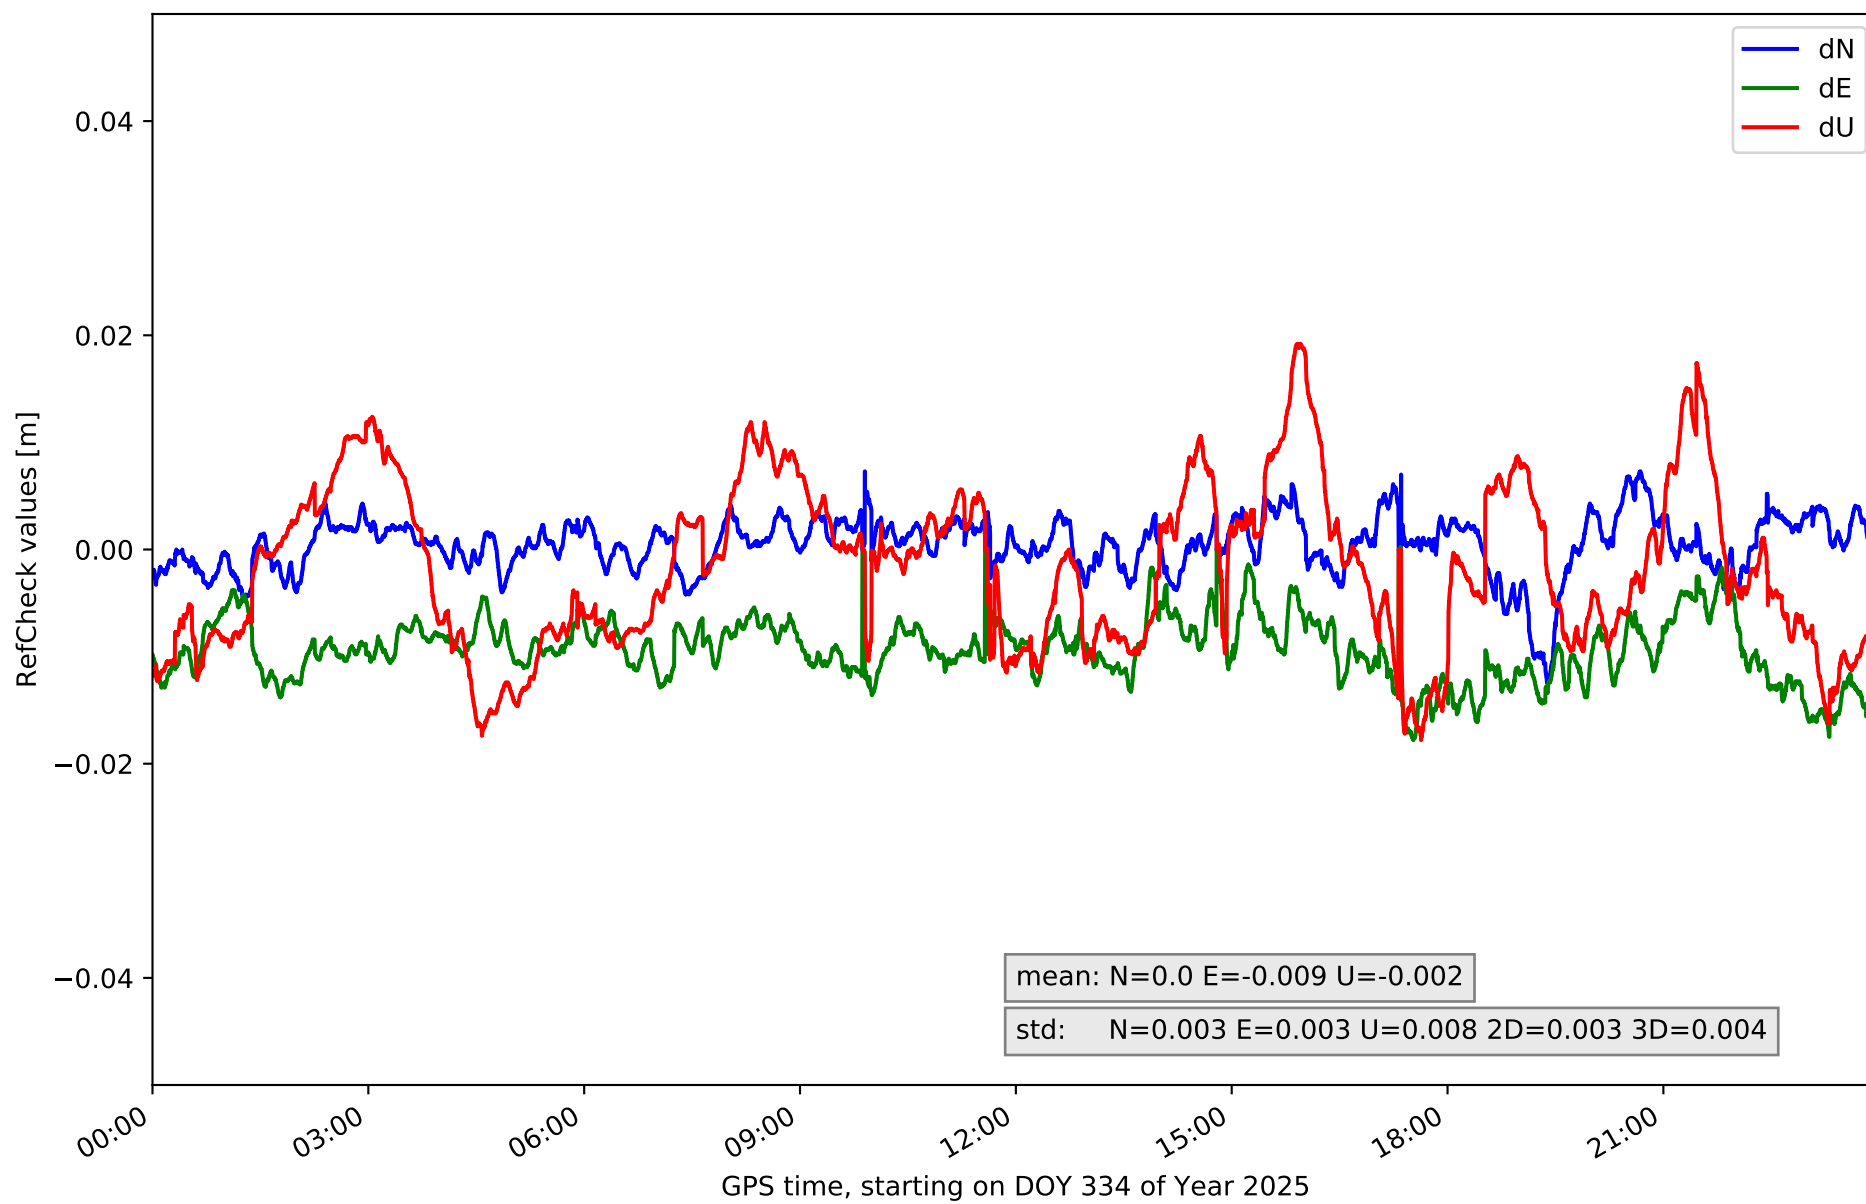

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.01	0.015	0.003	-0.006	0.029	0.005	-0.038	0.046	0.011	0.003	0.007	46784	73.4	7655	12.0
EH02	-0.02	0.025	0.006	-0.017	0.033	0.008	-0.06	0.06	0.018	0.006	0.012	58111	91.1	58107	91.1
GOM1	-0.015	0.014	0.004	-0.025	-0.002	0.005	-0.03	0.014	0.008	0.005	0.006	46681	73.2	23274	36.5
GOME	-0.009	0.011	0.003	-0.014	0.008	0.004	-0.021	0.031	0.01	0.003	0.006	2409	3.8	6485	10.2
IZAN	-0.01	0.005	0.002	-0.023	0.003	0.003	-0.06	0.003	0.005	0.003	0.005	24532	38.5	5024	7.9
LP01	-0.023	0.0	0.004	-0.008	0.025	0.006	-0.022	0.024	0.009	0.005	0.006	53852	84.4	19675	30.8
LP03	-0.015	0.014	0.004	-0.018	0.028	0.006	-0.042	0.015	0.012	0.005	0.01	13359	20.9	13701	21.5
LPAL	-0.016	0.001	0.002	-0.01	0.017	0.004	-0.054	0.006	0.009	0.003	0.007	51615	80.9	20060	31.5
LRES	-0.015	0.019	0.005	-0.017	0.026	0.006	-0.037	0.012	0.011	0.004	0.006	55541	87.1	36420	57.1
TN01	-0.014	0.012	0.004	-0.03	0.002	0.005	-0.049	0.016	0.011	0.005	0.008	54309	85.2	28632	44.9
TN02	-0.011	0.007	0.003	-0.026	0.001	0.004	-0.031	0.019	0.01	0.004	0.005	26152	41.0	9272	14.5
TN03	-0.007	0.012	0.003	-0.015	0.006	0.004	-0.031	0.01	0.009	0.003	0.006	10138	15.9	9186	14.4
TN06	-0.009	0.005	0.003	-0.015	-0.0	0.003	-0.024	0.01	0.006	0.003	0.005	17403	27.3	5268	8.3
TN09	0.003	0.017	0.002	-0.018	-0.005	0.002	-0.022	0.007	0.006	0.002	0.004	61075	95.8	9360	14.7
TE11	-0.013	0.007	0.003	-0.018	0.0	0.003	-0.018	0.019	0.008	0.003	0.004	28260	44.3	1690	2.6
Mean	-0.012	0.011	0.003	-0.017	0.011	0.005	-0.036	0.019	0.01	0.004	0.006	36681.4	57.5	16920.6	26.5
Min/Max	-0.023	0.025	0.006	-0.03	0.033	0.008	-0.06	0.06	0.018	0.006	0.012	61075	95.8	58107	91.1

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	93.6	93.2	91.6	95.5	93.3
considering satellites with dual-frequency fixed	89.1	90.4	79.8	92.9	90.8
considering all signals separately	89.5	90.3	79.8	93.0	90.5