

summary for network N32T

timeperiod chosen: from 2025-12-13-00:00:00 until 2025-12-13-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 2.0 seconds


average fixing percentage with threshold set to 0.3: 80.1 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: LEICA GR50	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

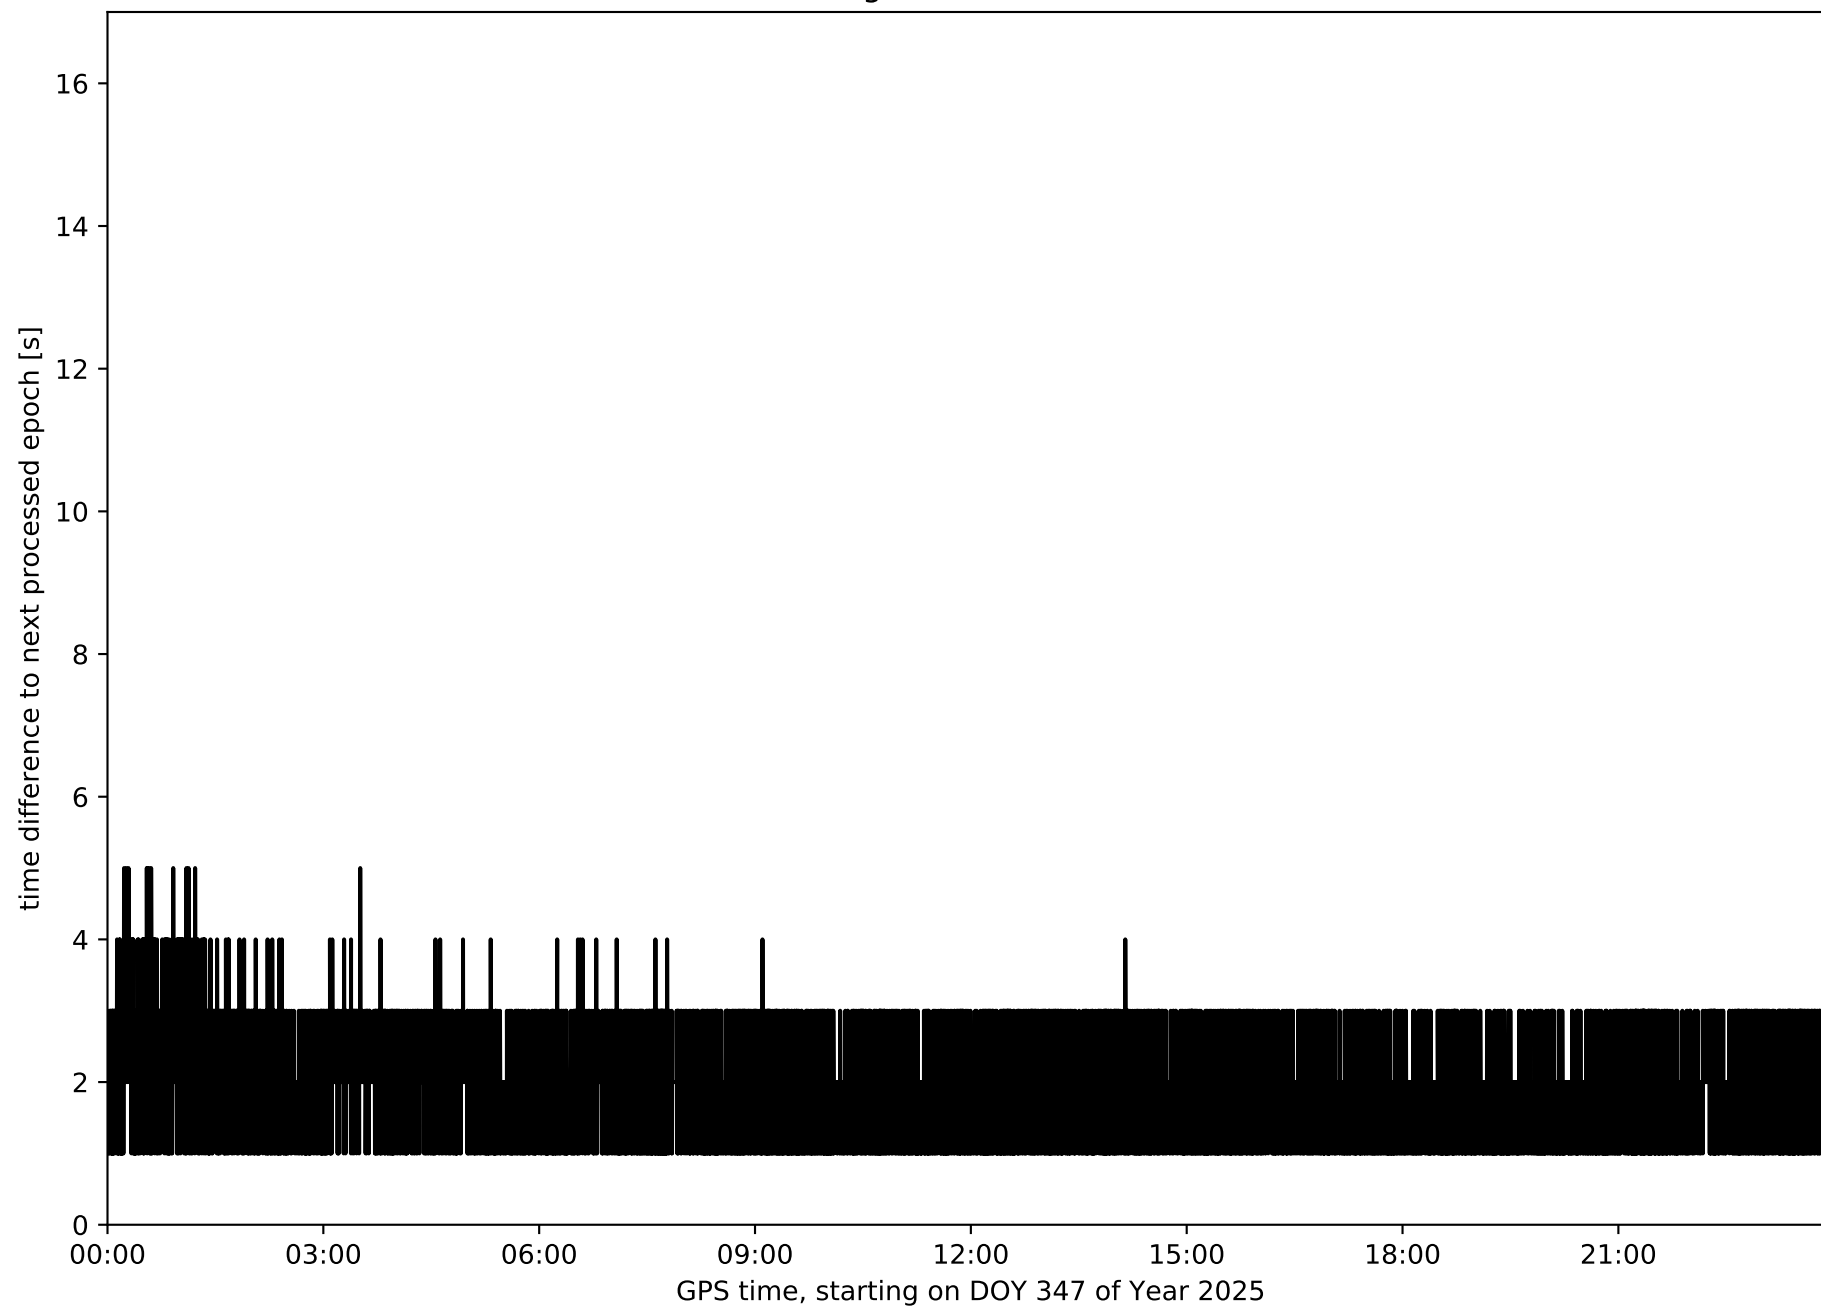


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

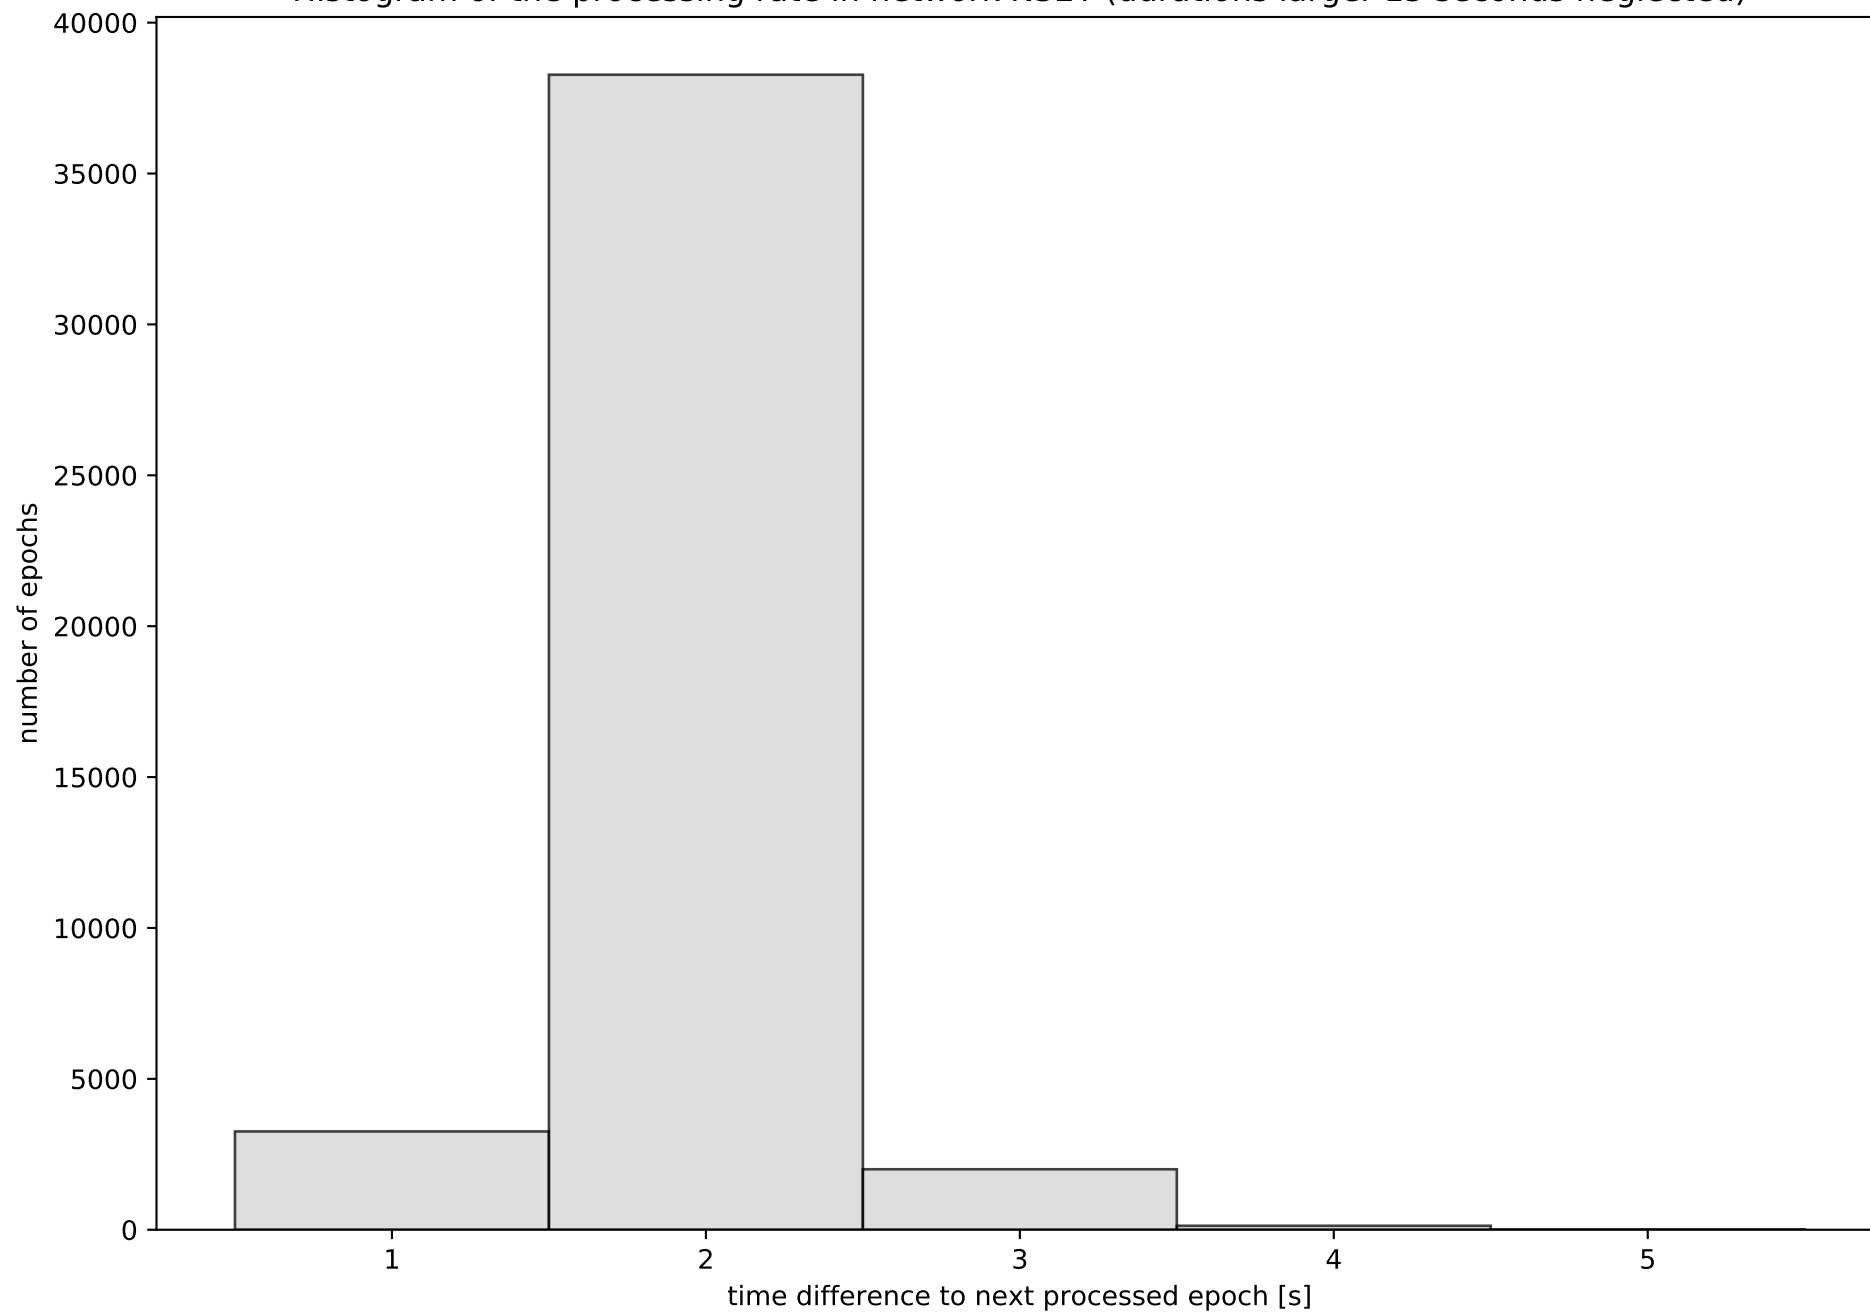


Network N32T with threshold set to 0.3

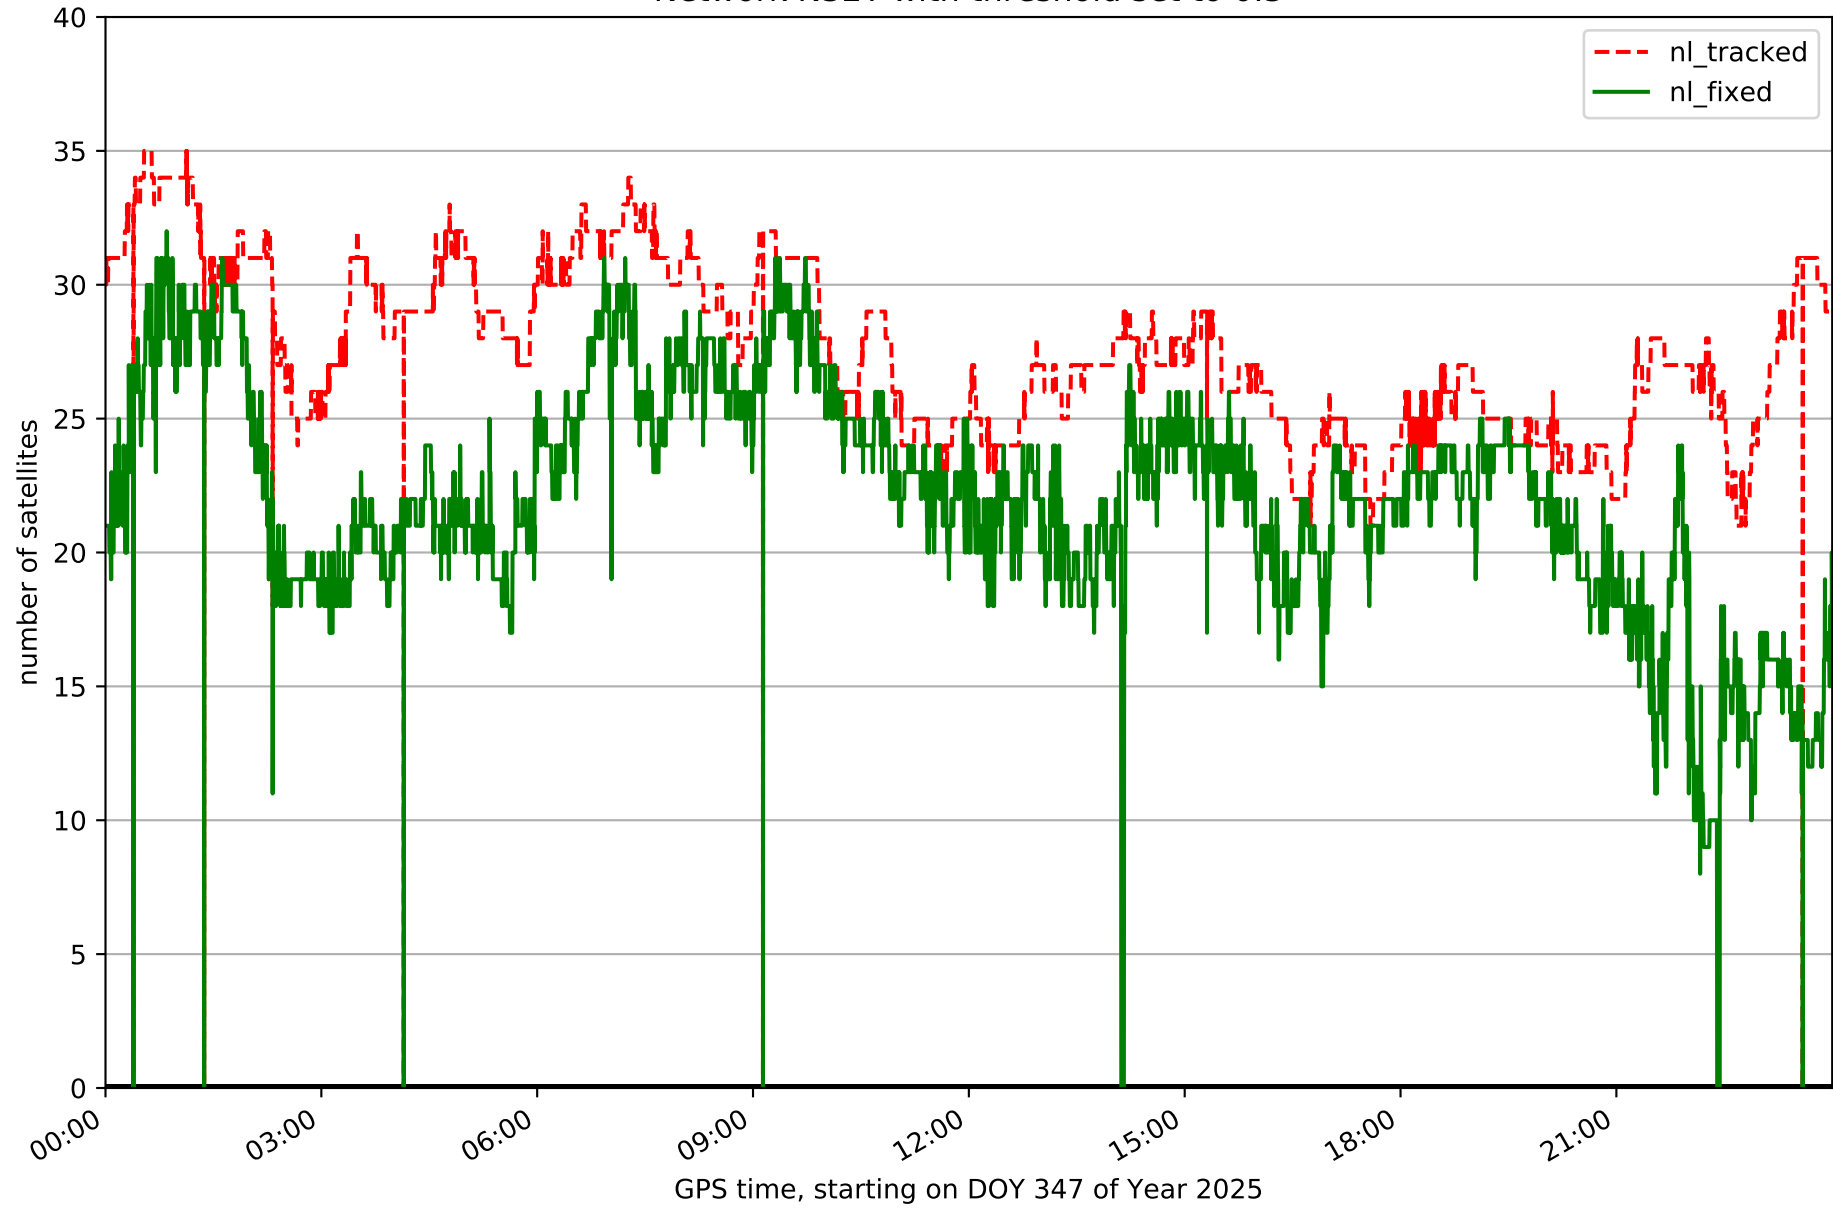


Fixing percentage of satellites in network N32T with threshold set to 0.3

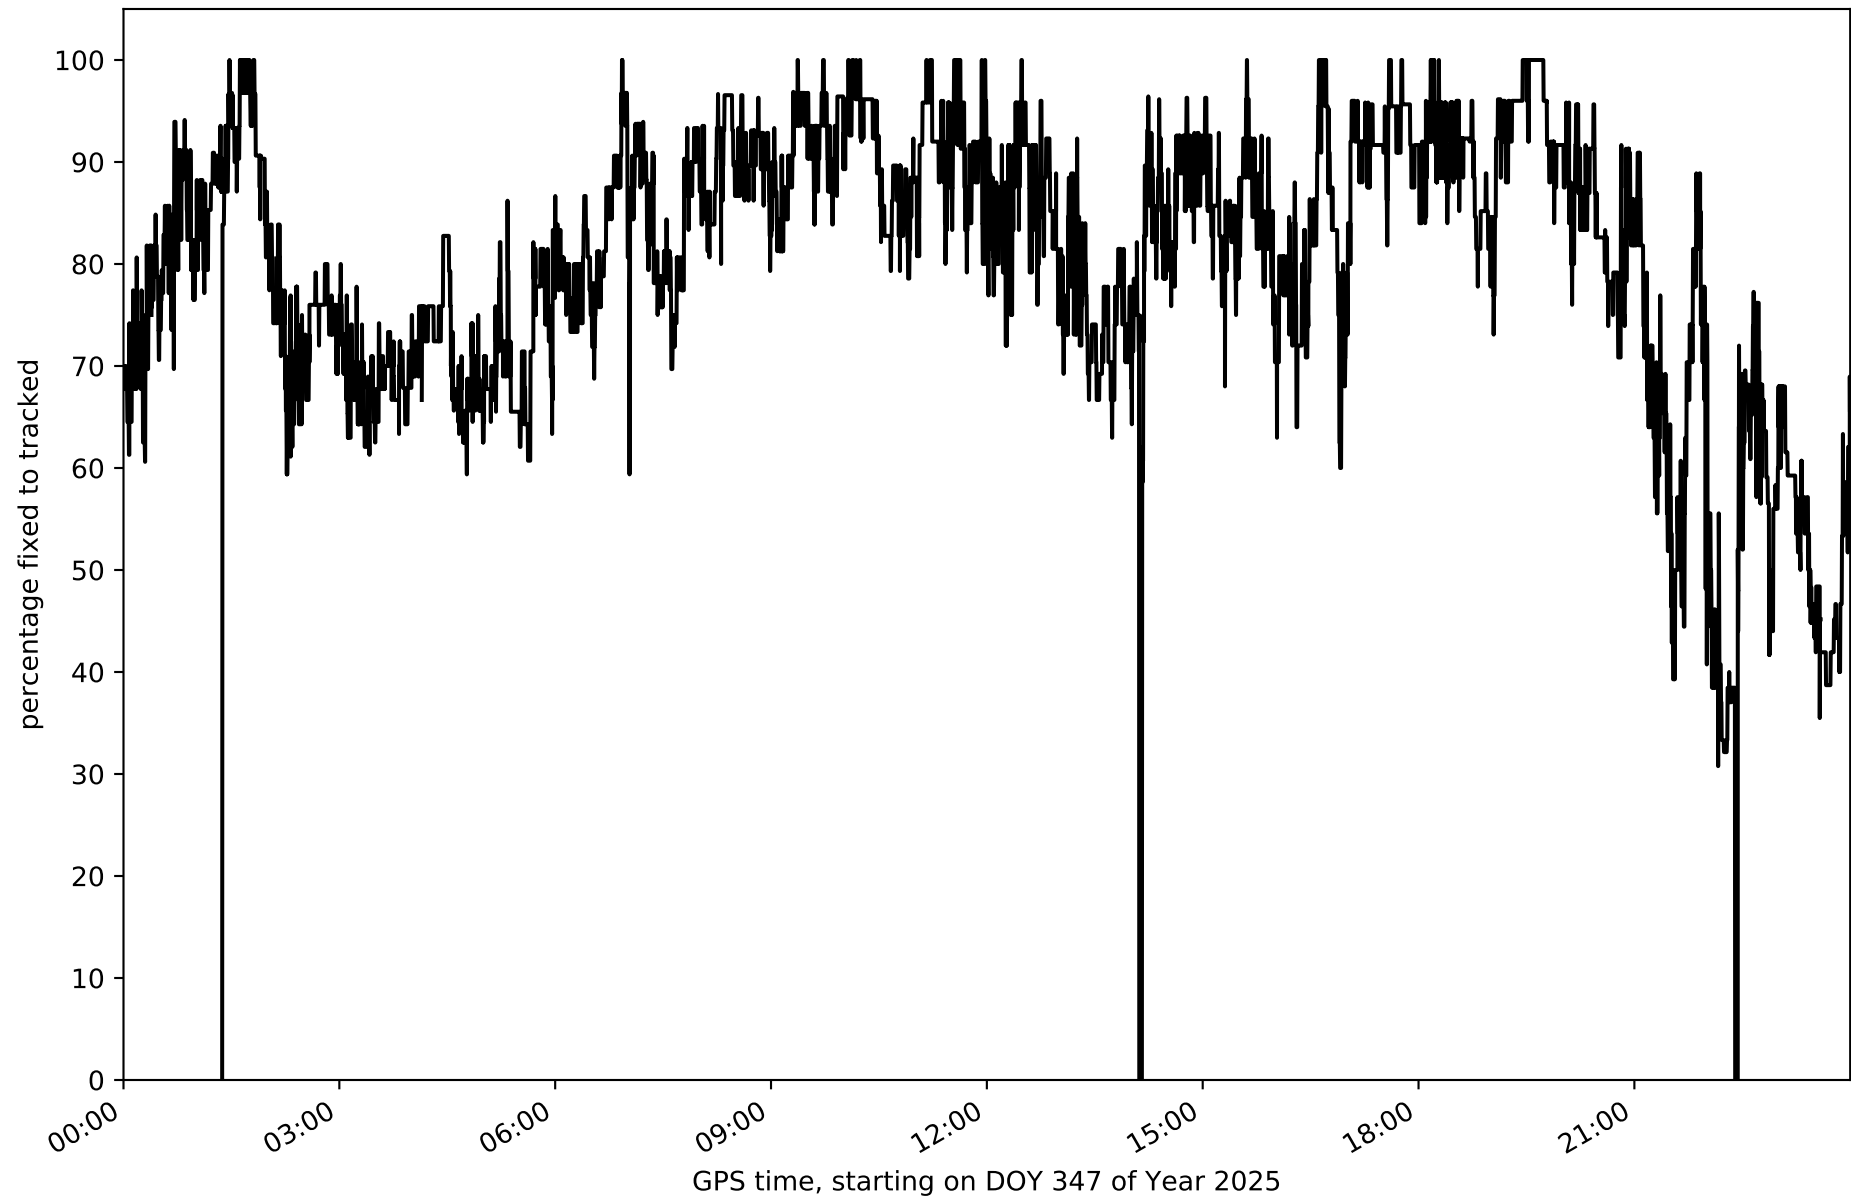


Network N32T - only GPS with threshold set to 0.3

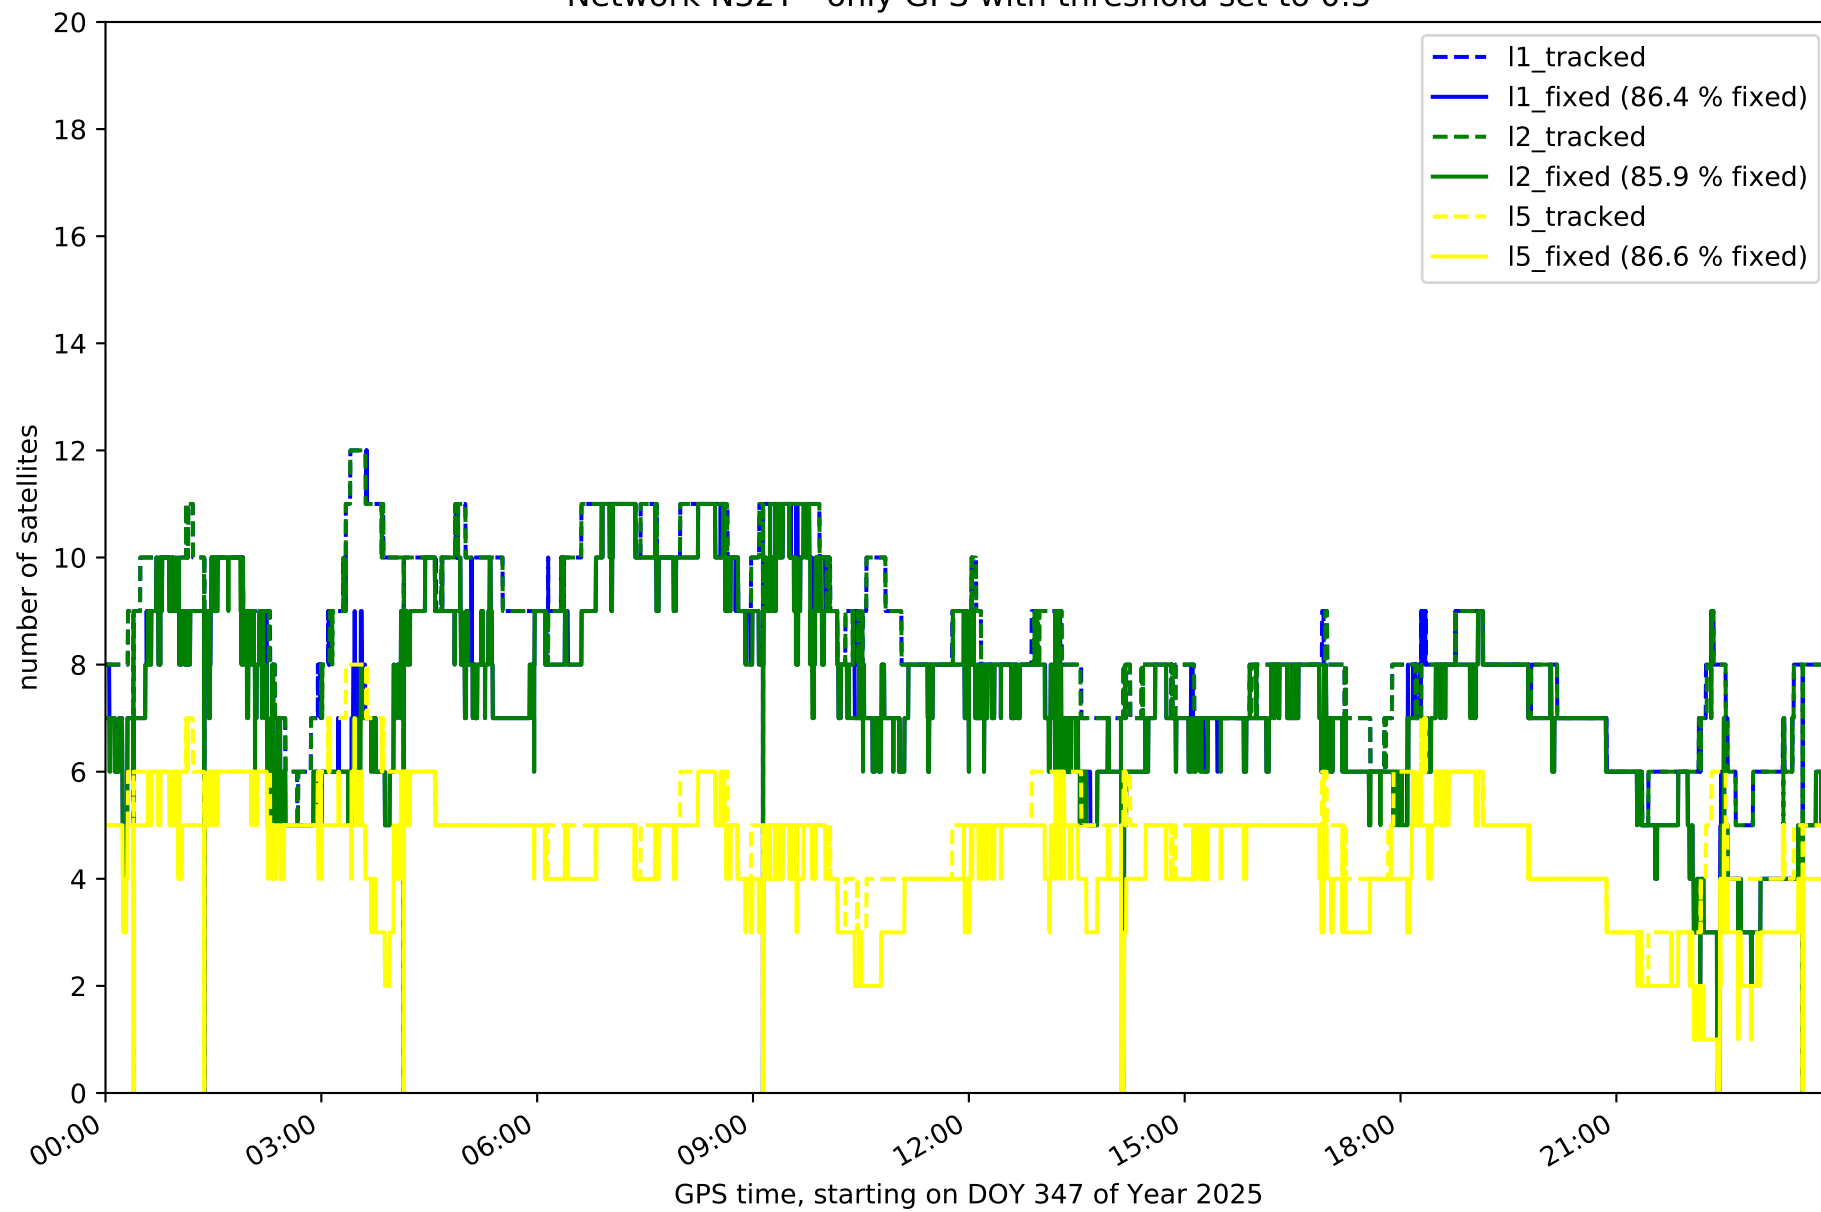


Network N32T - only GLONASS with threshold set to 0.3

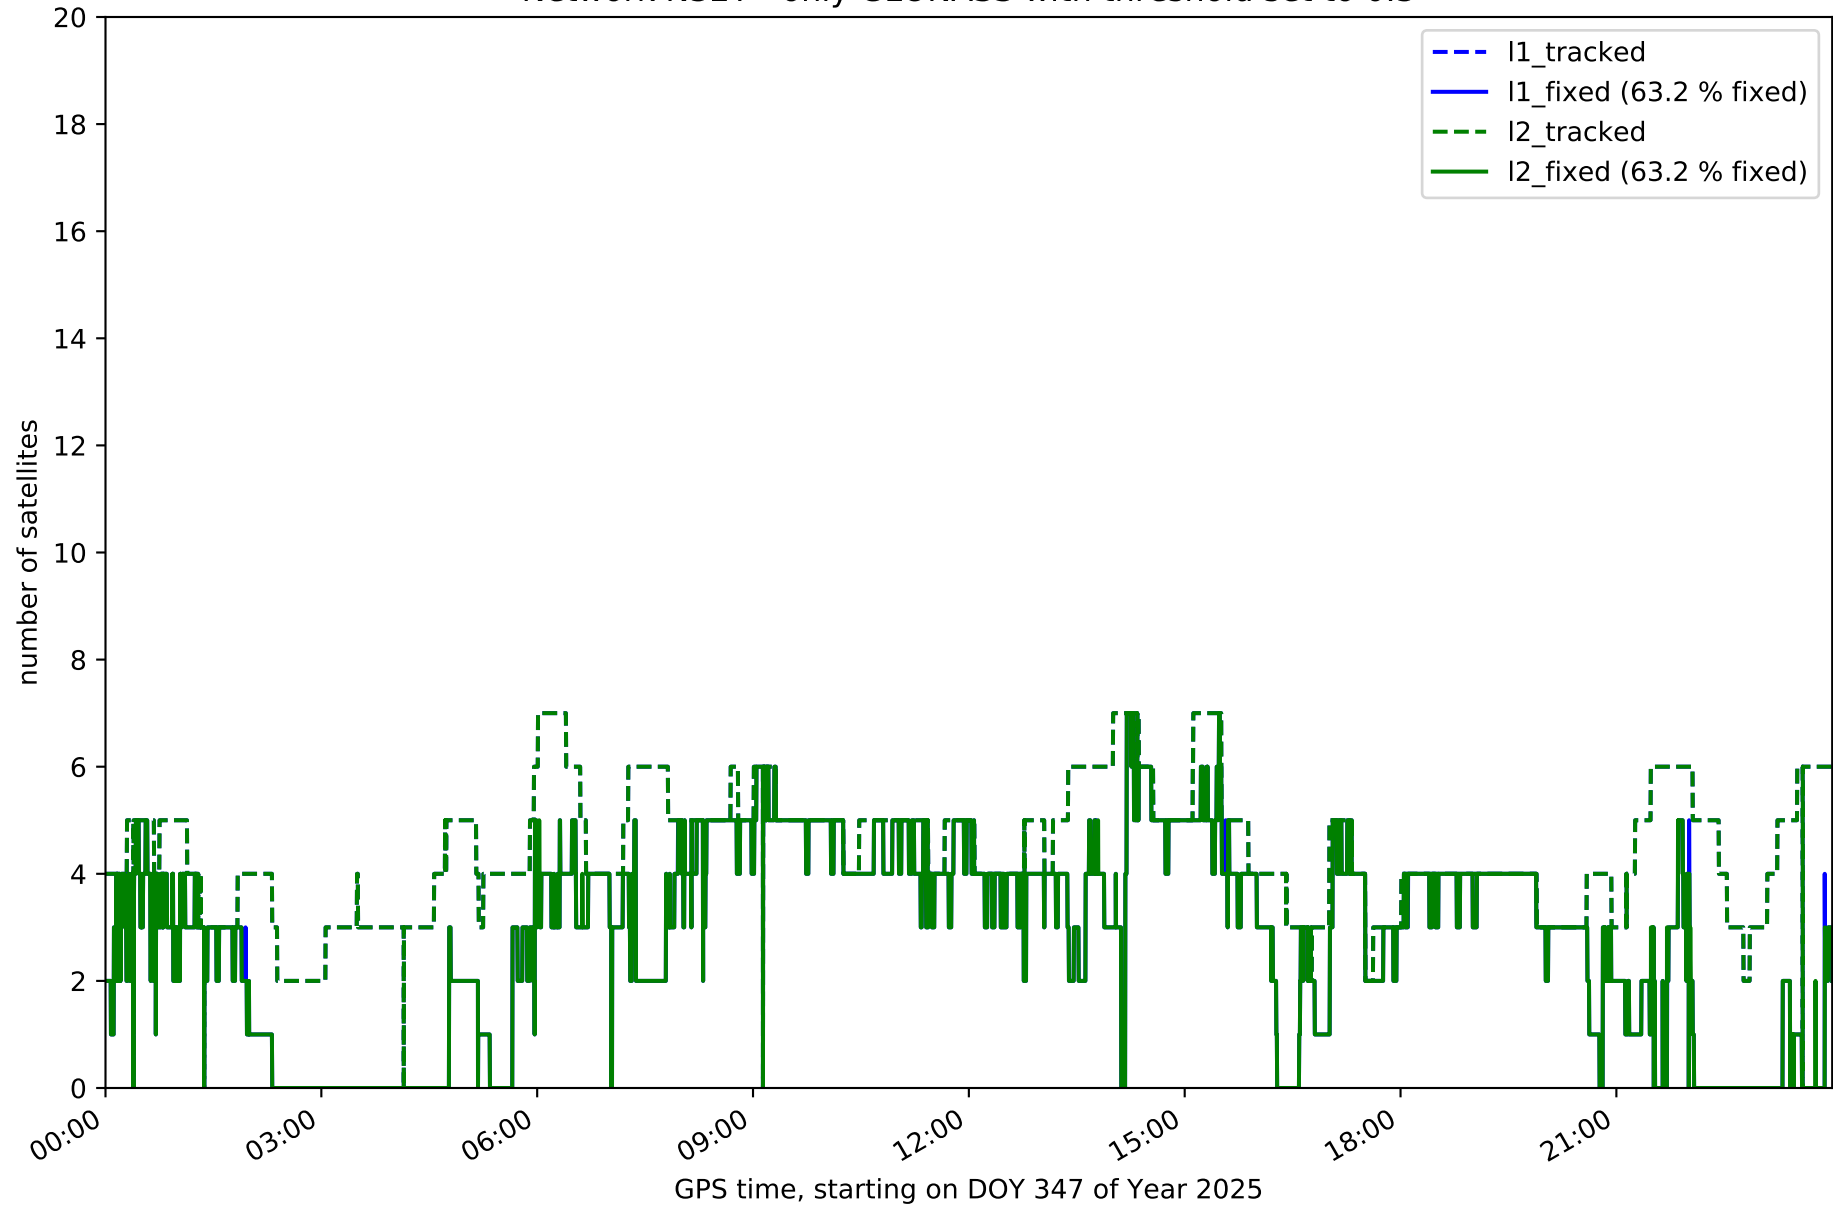


Network N32T - only BDS with threshold set to 0.3

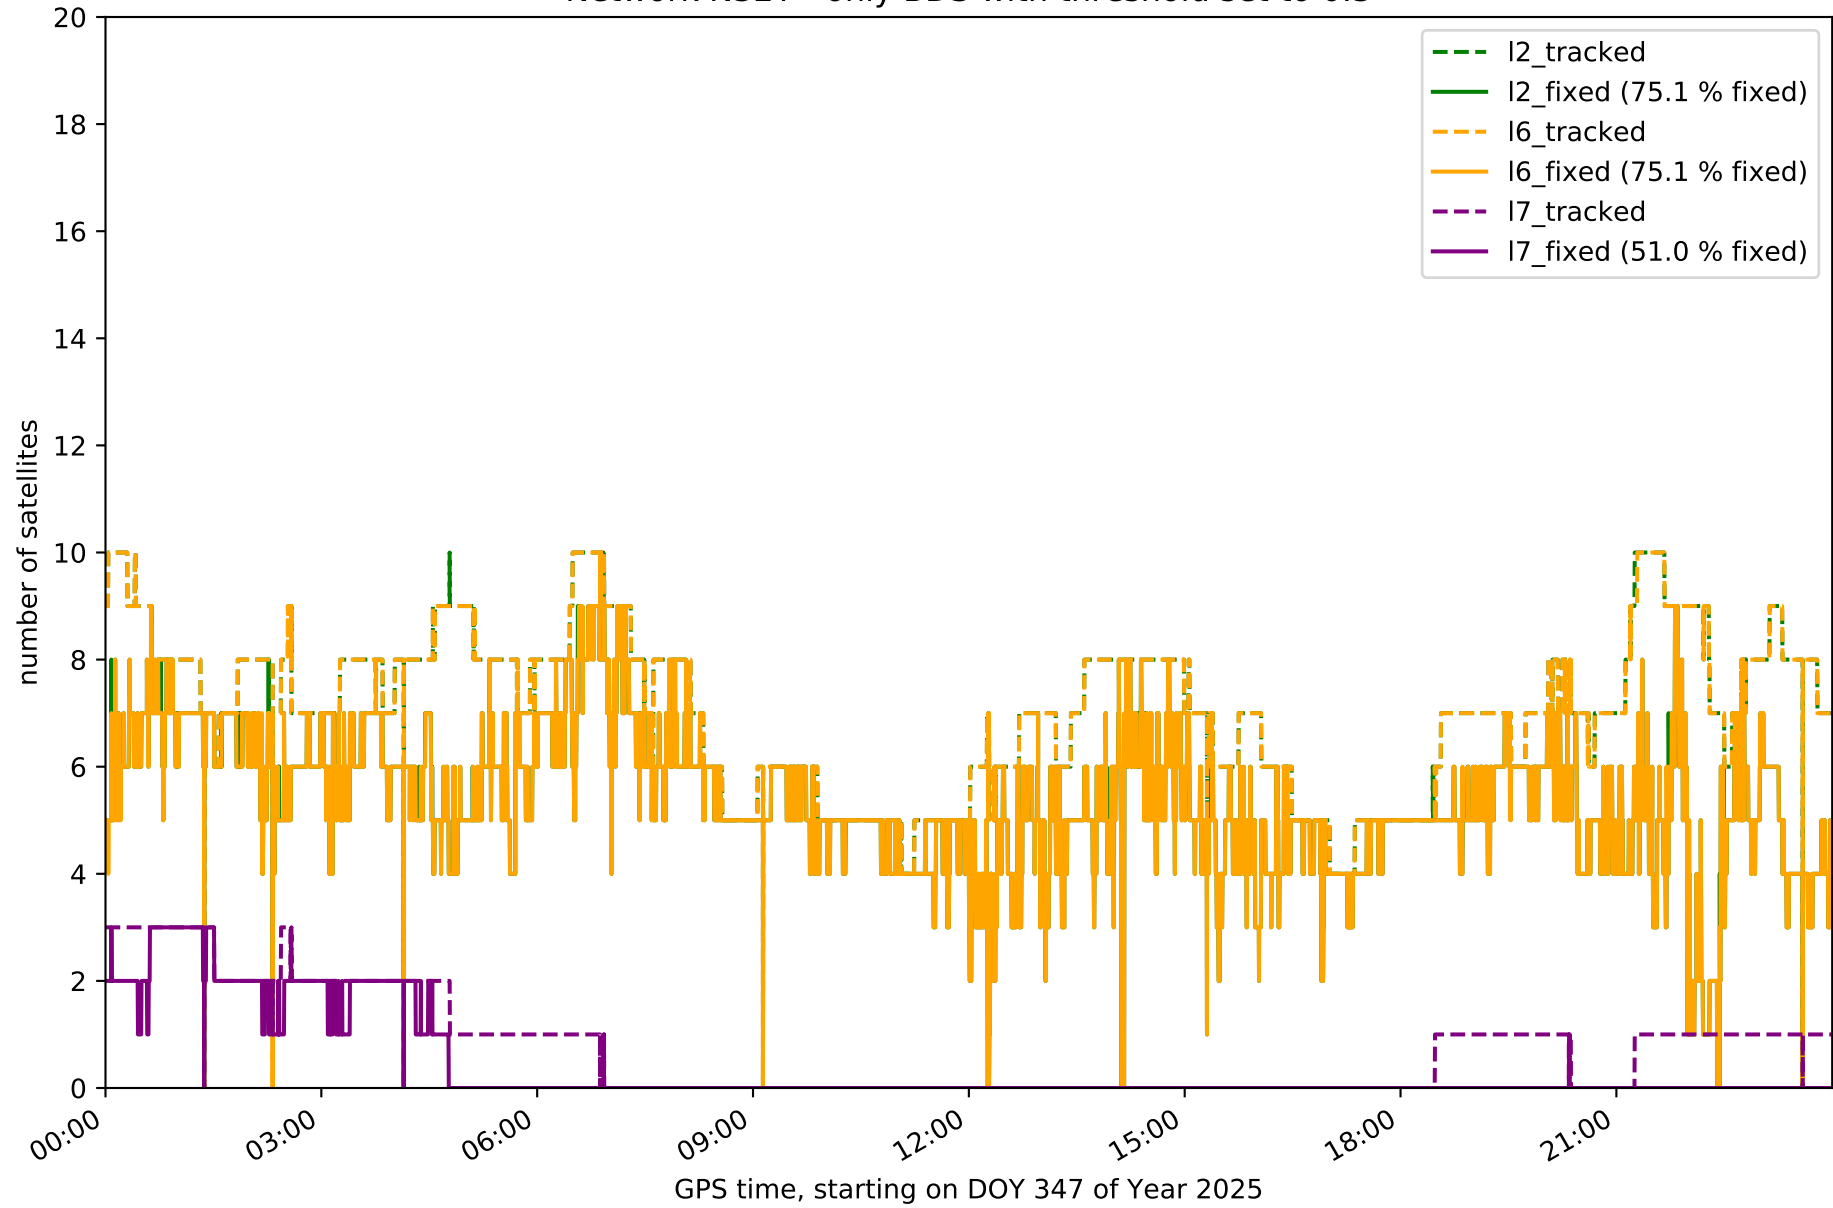


Network N32T - only Galileo with threshold set to 0.3

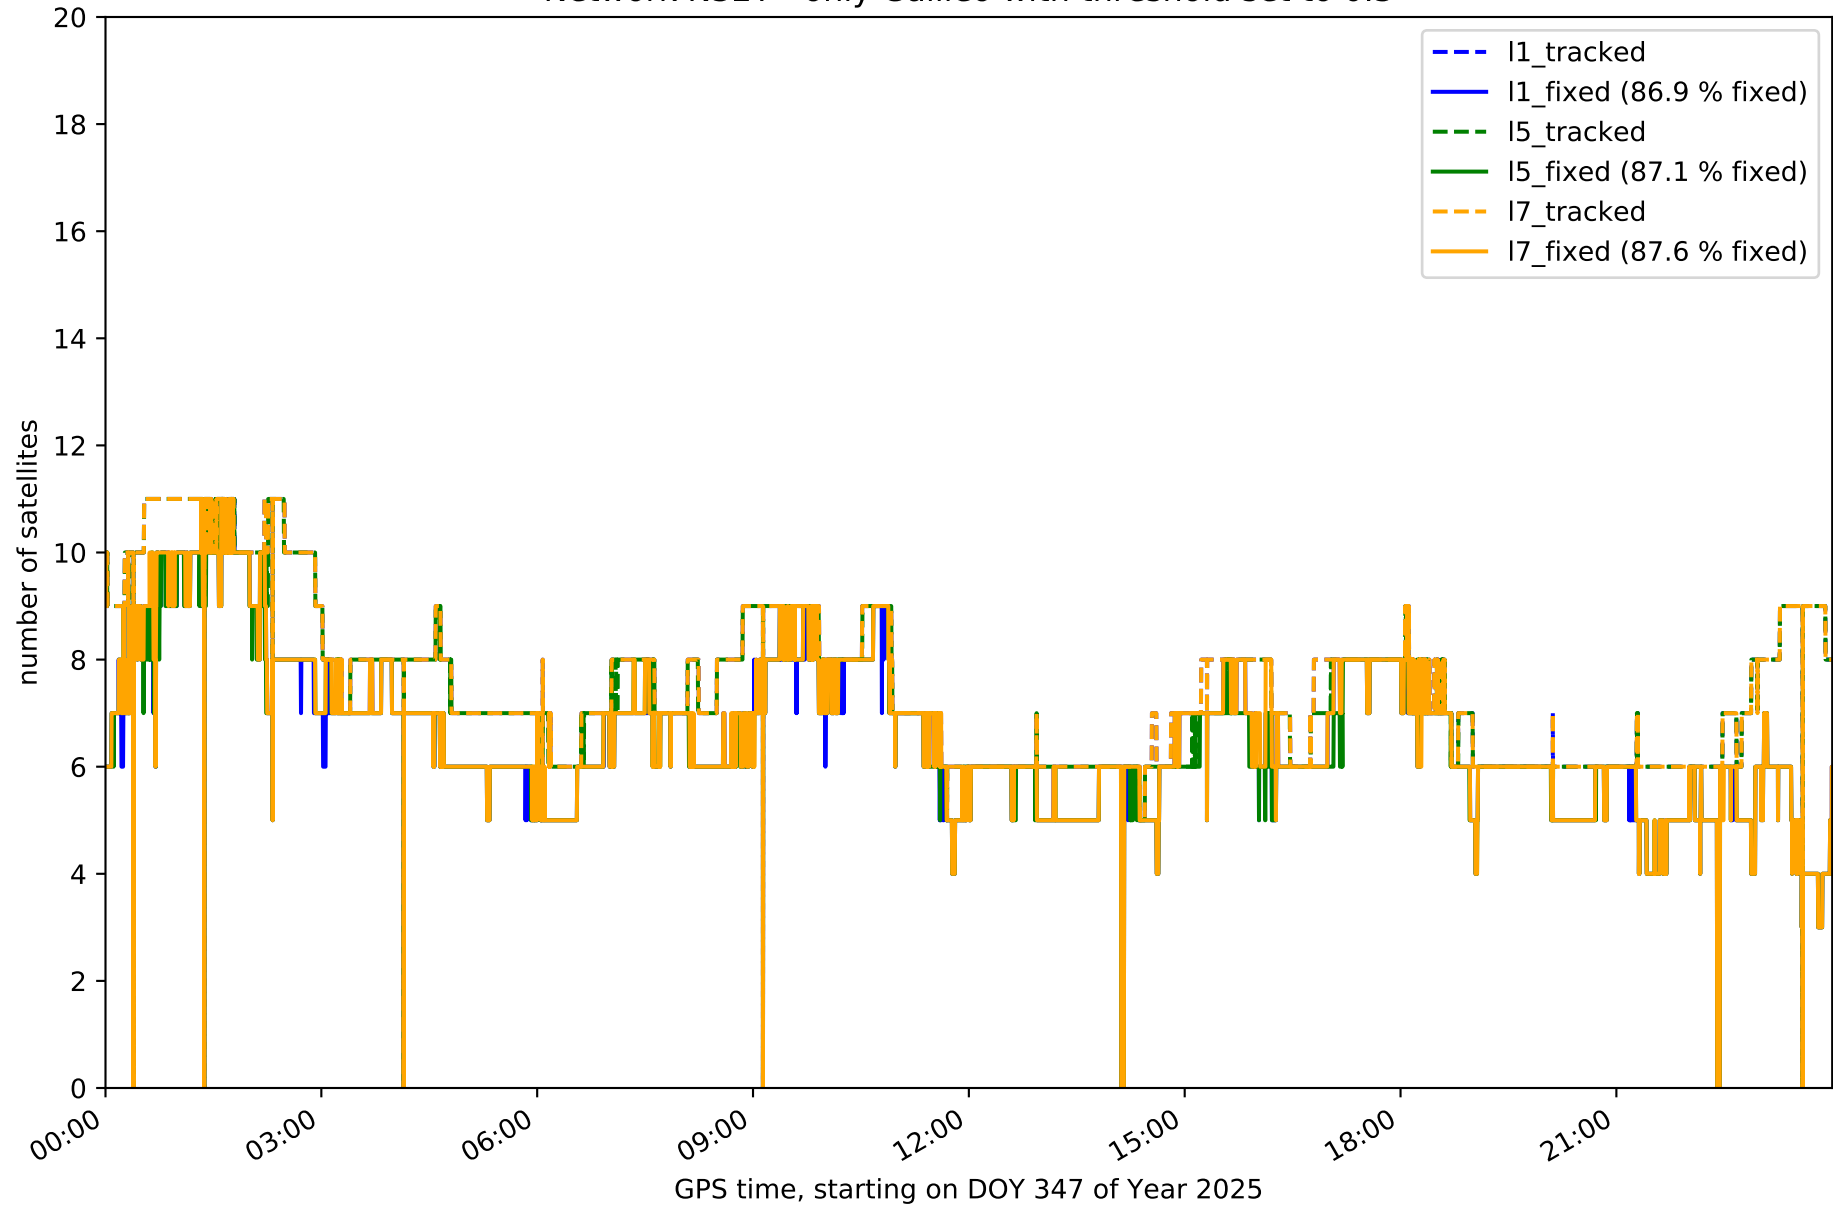


Station EH01 in network N32T

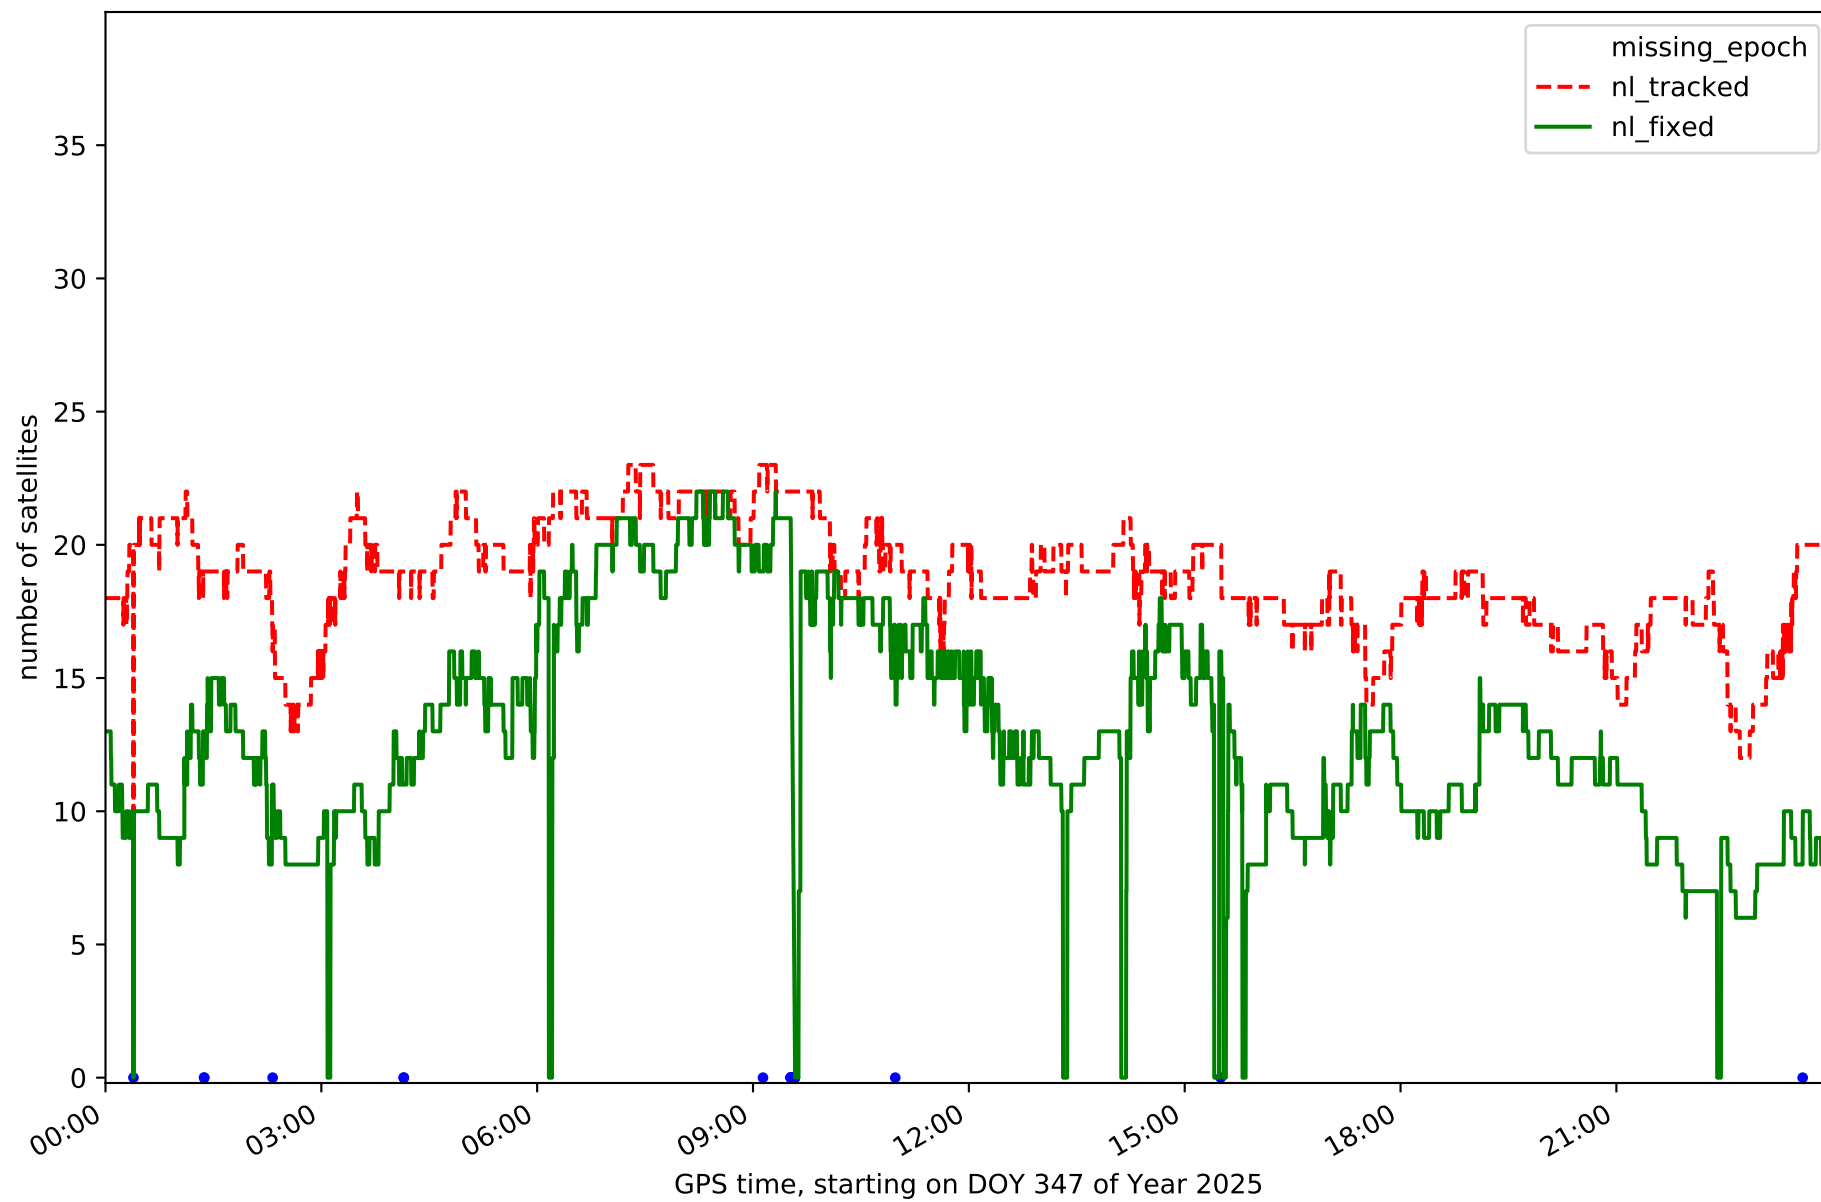


Station EH02 in network N32T

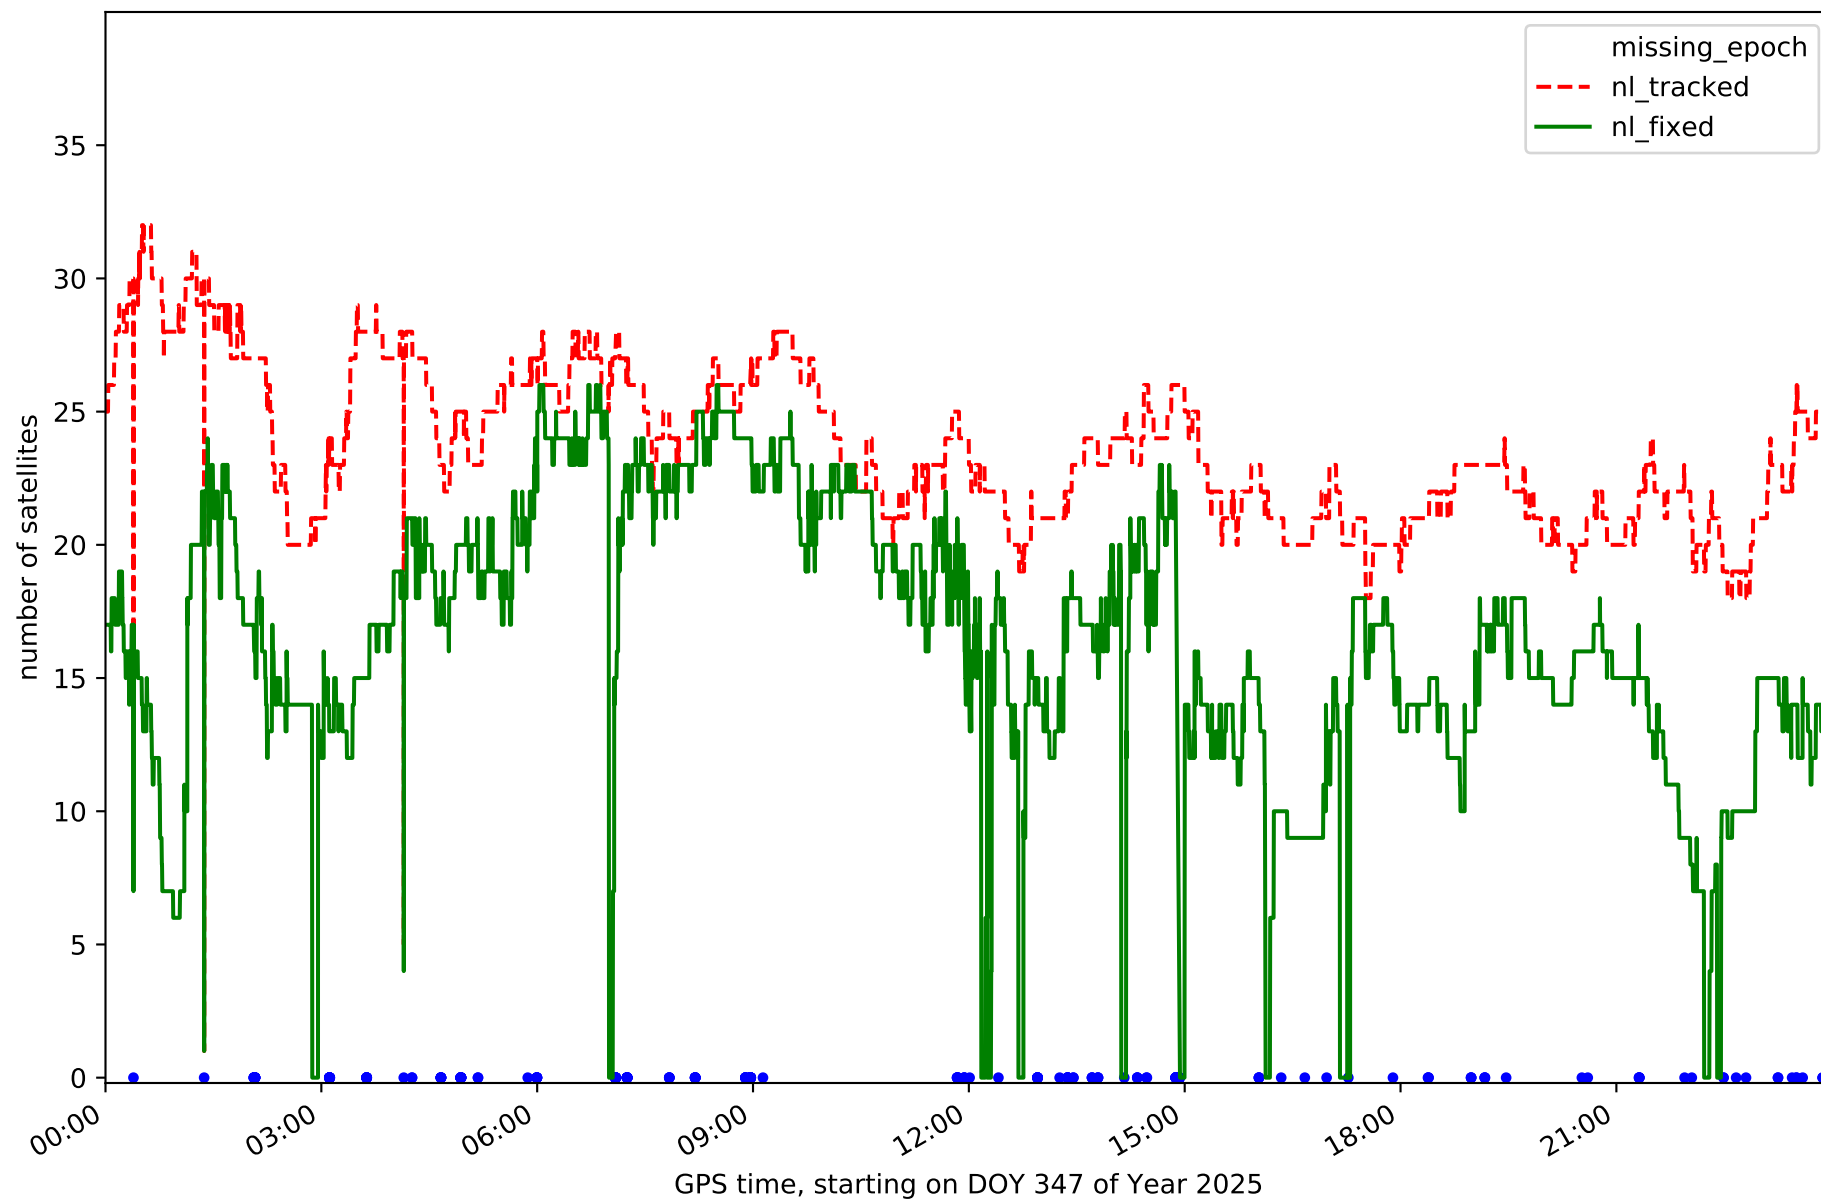


Station GOM1 in network N32T

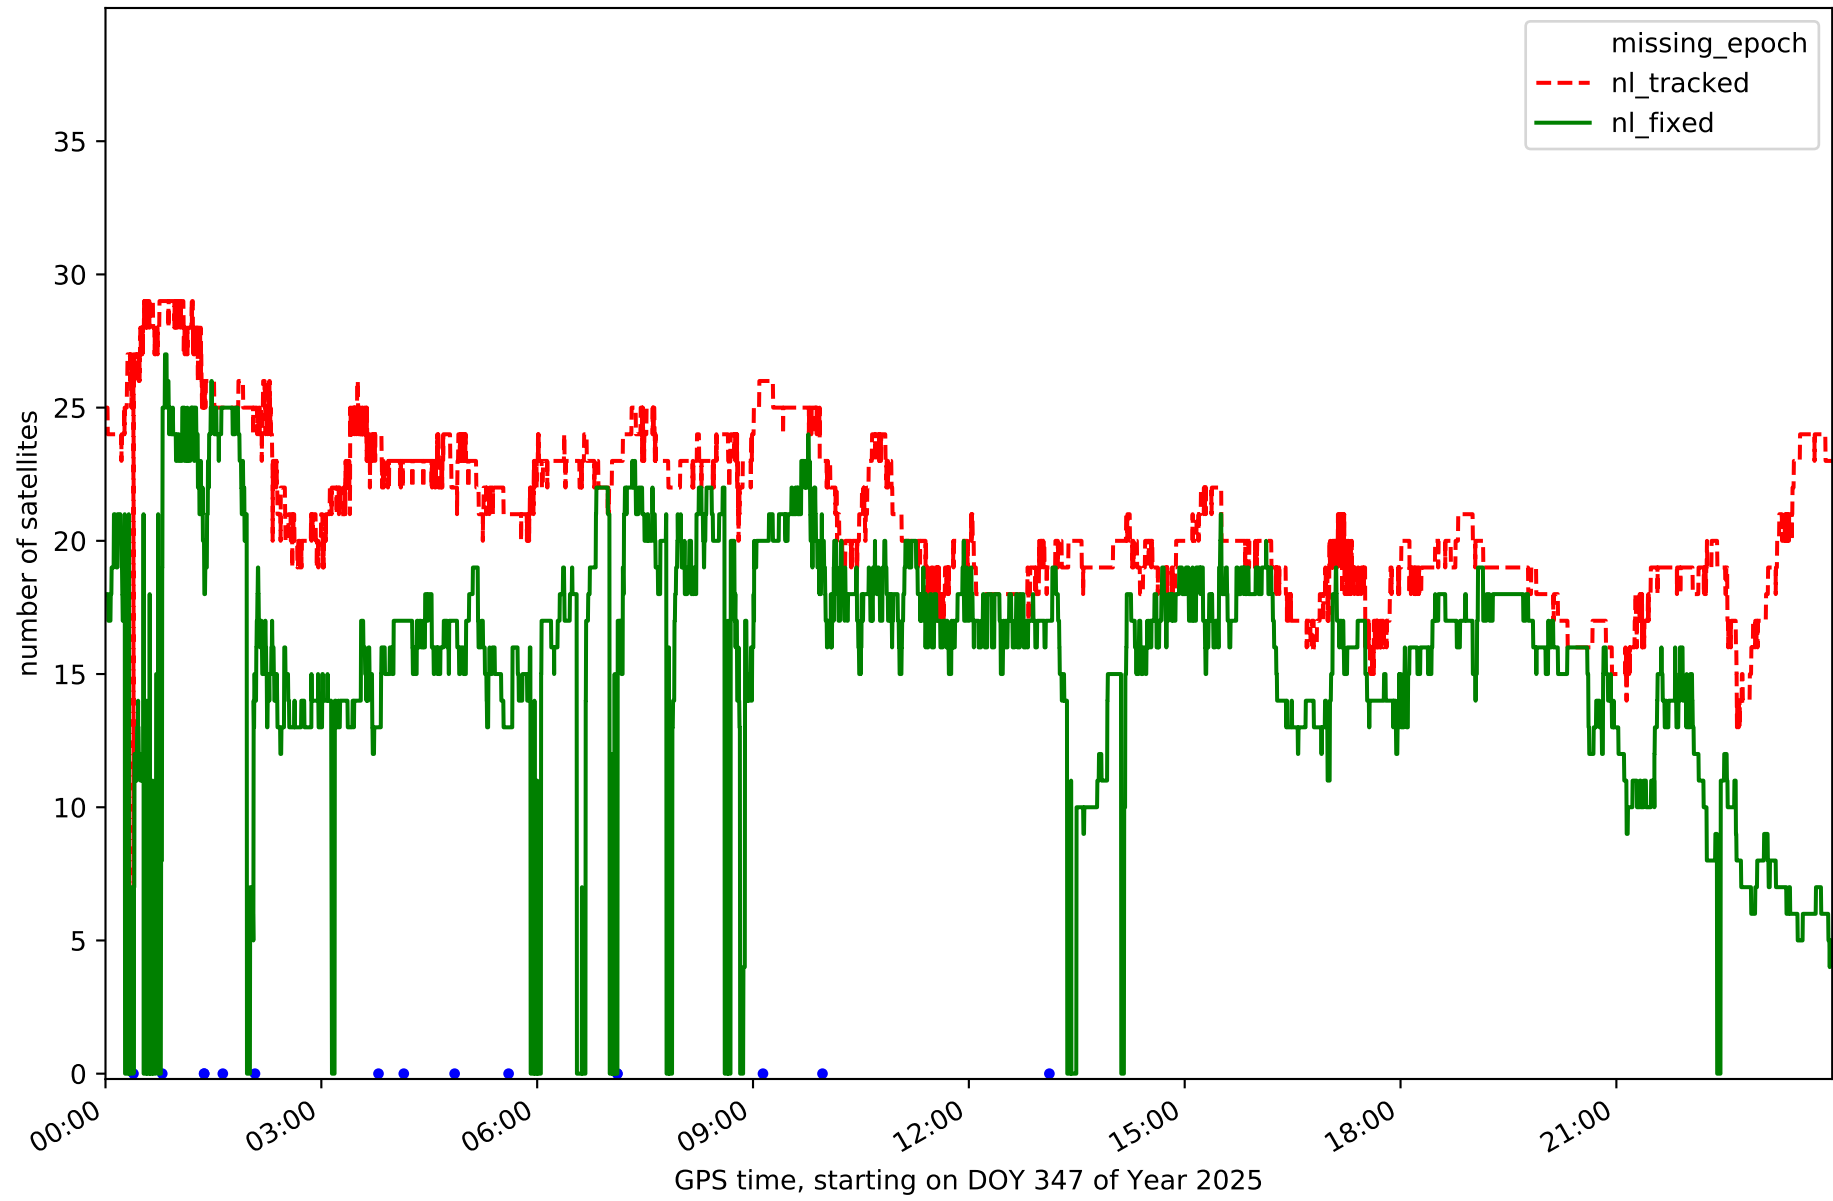


Station GOME in network N32T

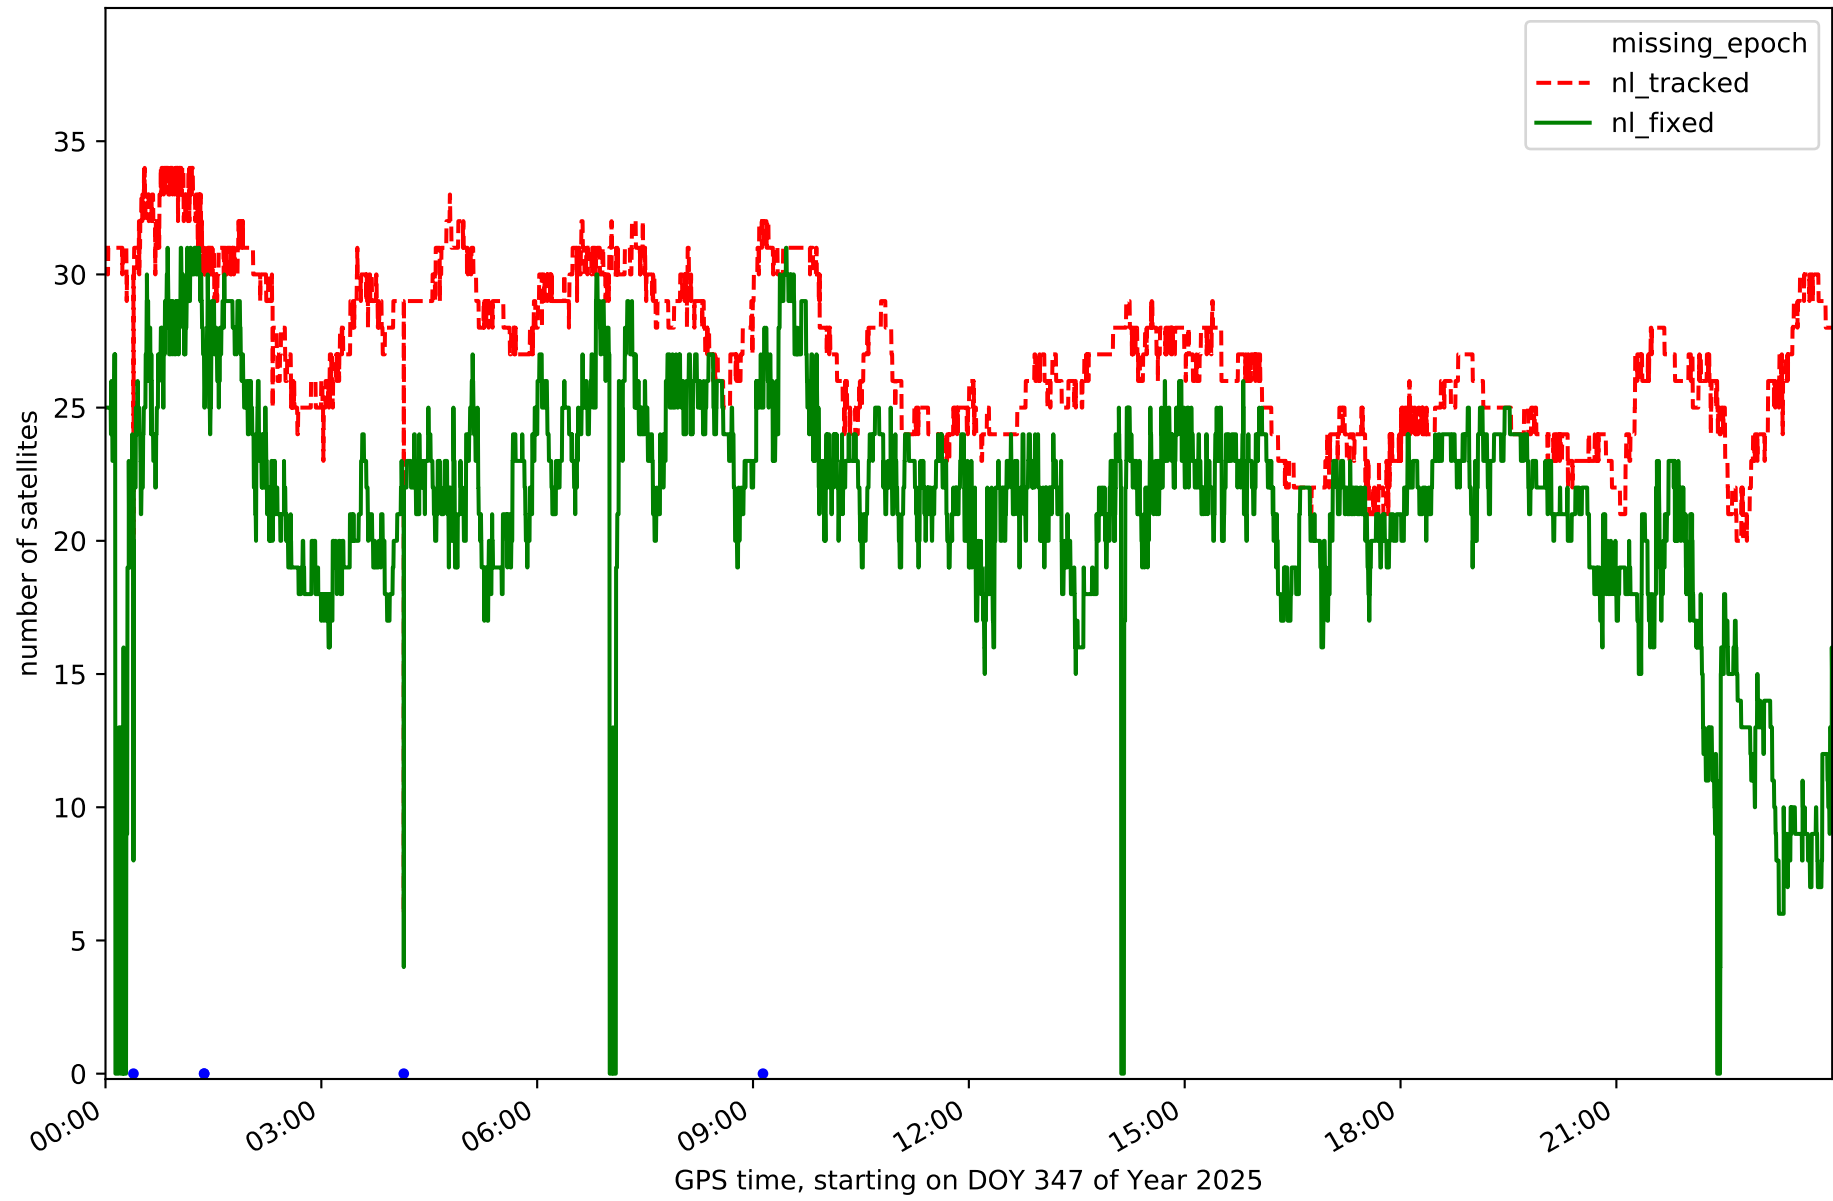


Station IZAN in network N32T

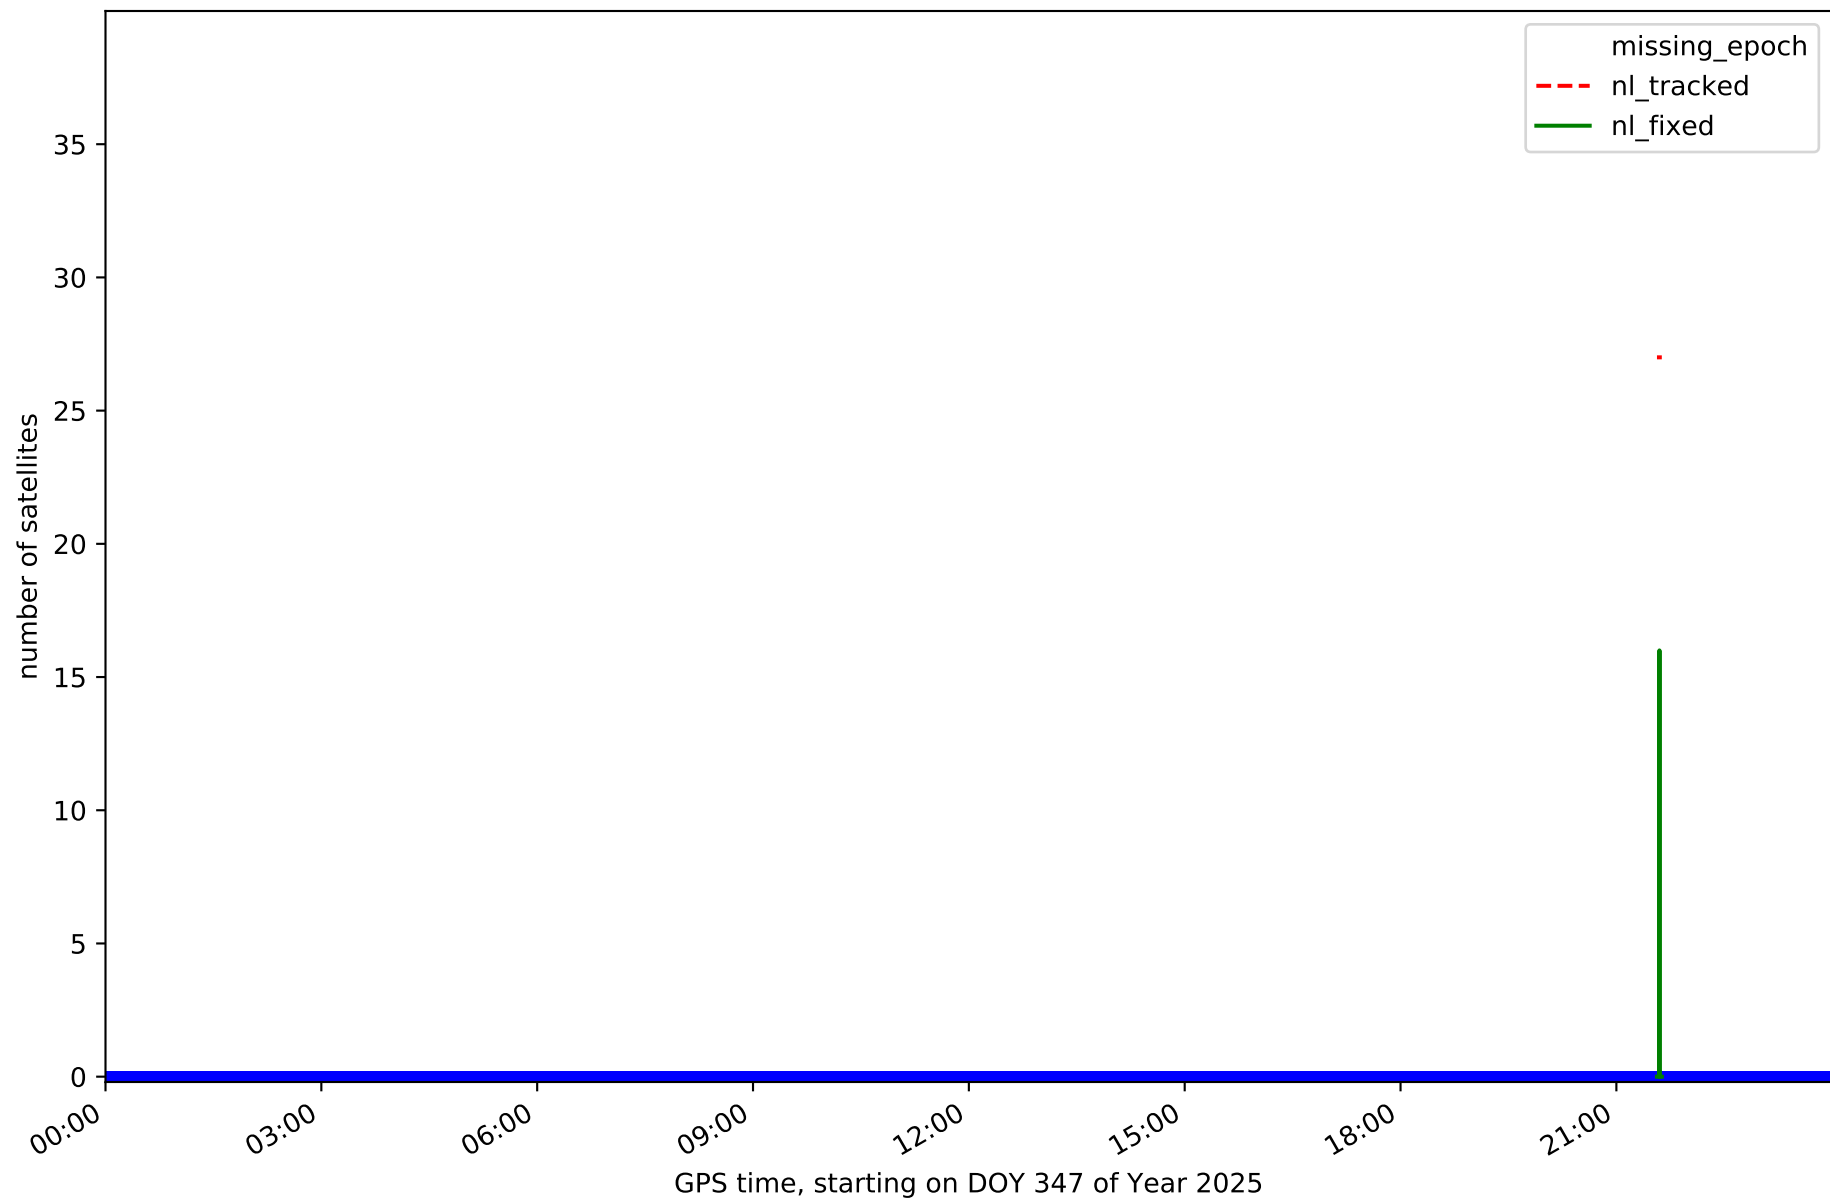


Station LP01 in network N32T

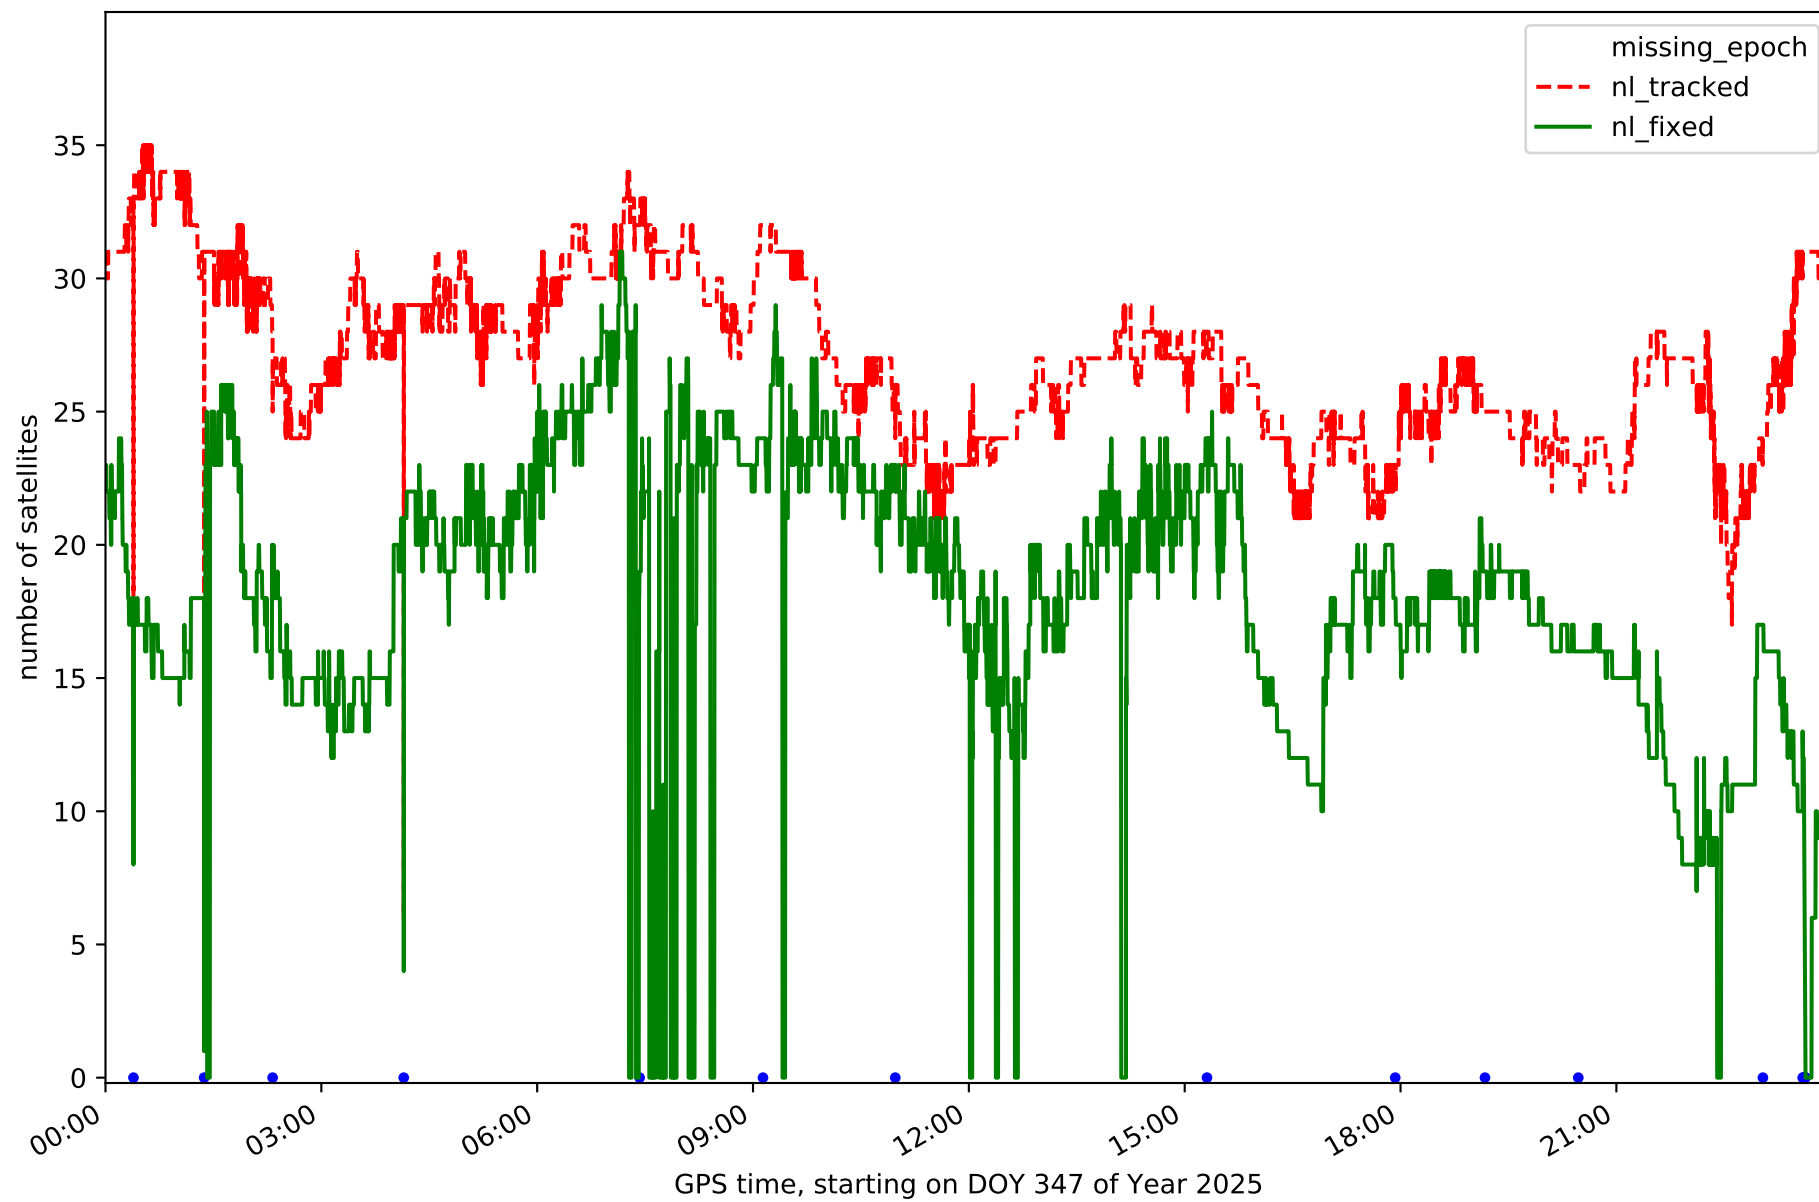


Station LP03 in network N32T

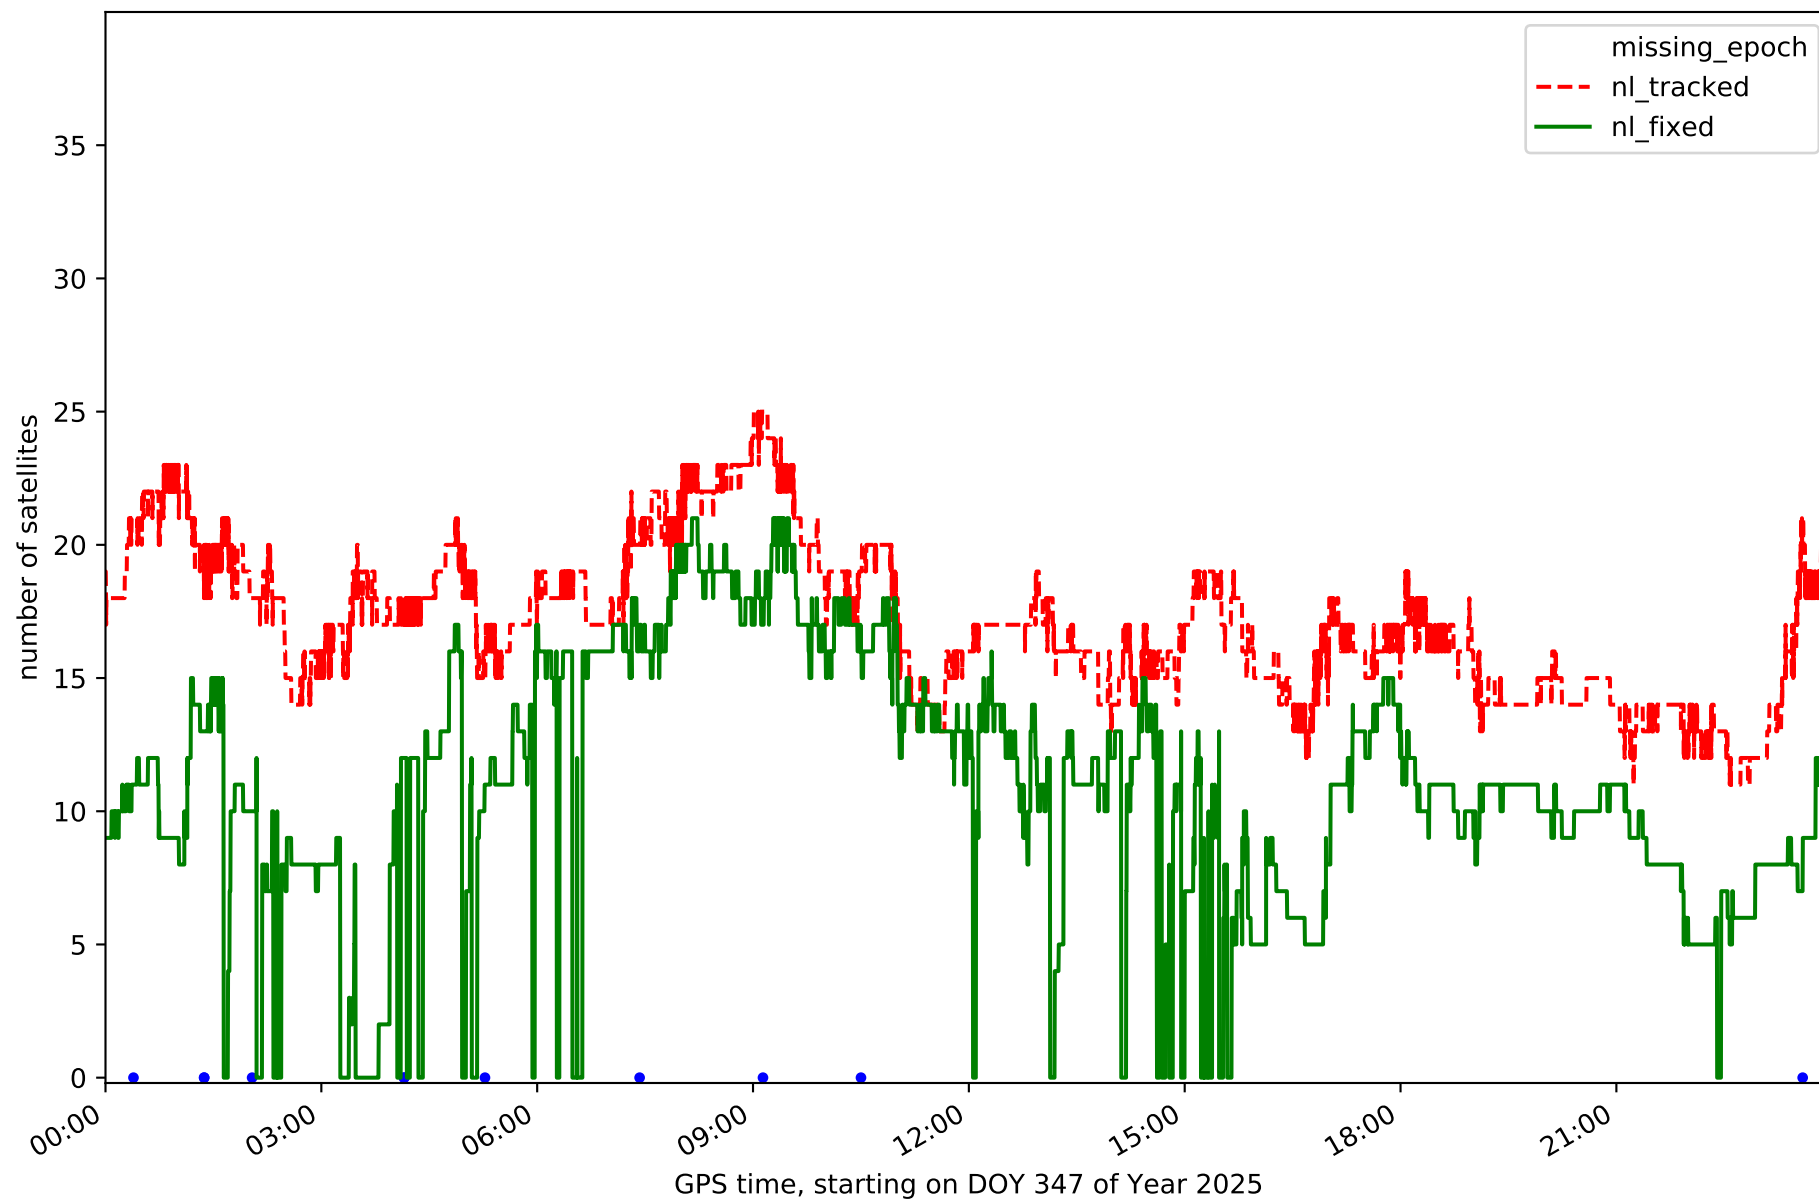


Station LPAL in network N32T

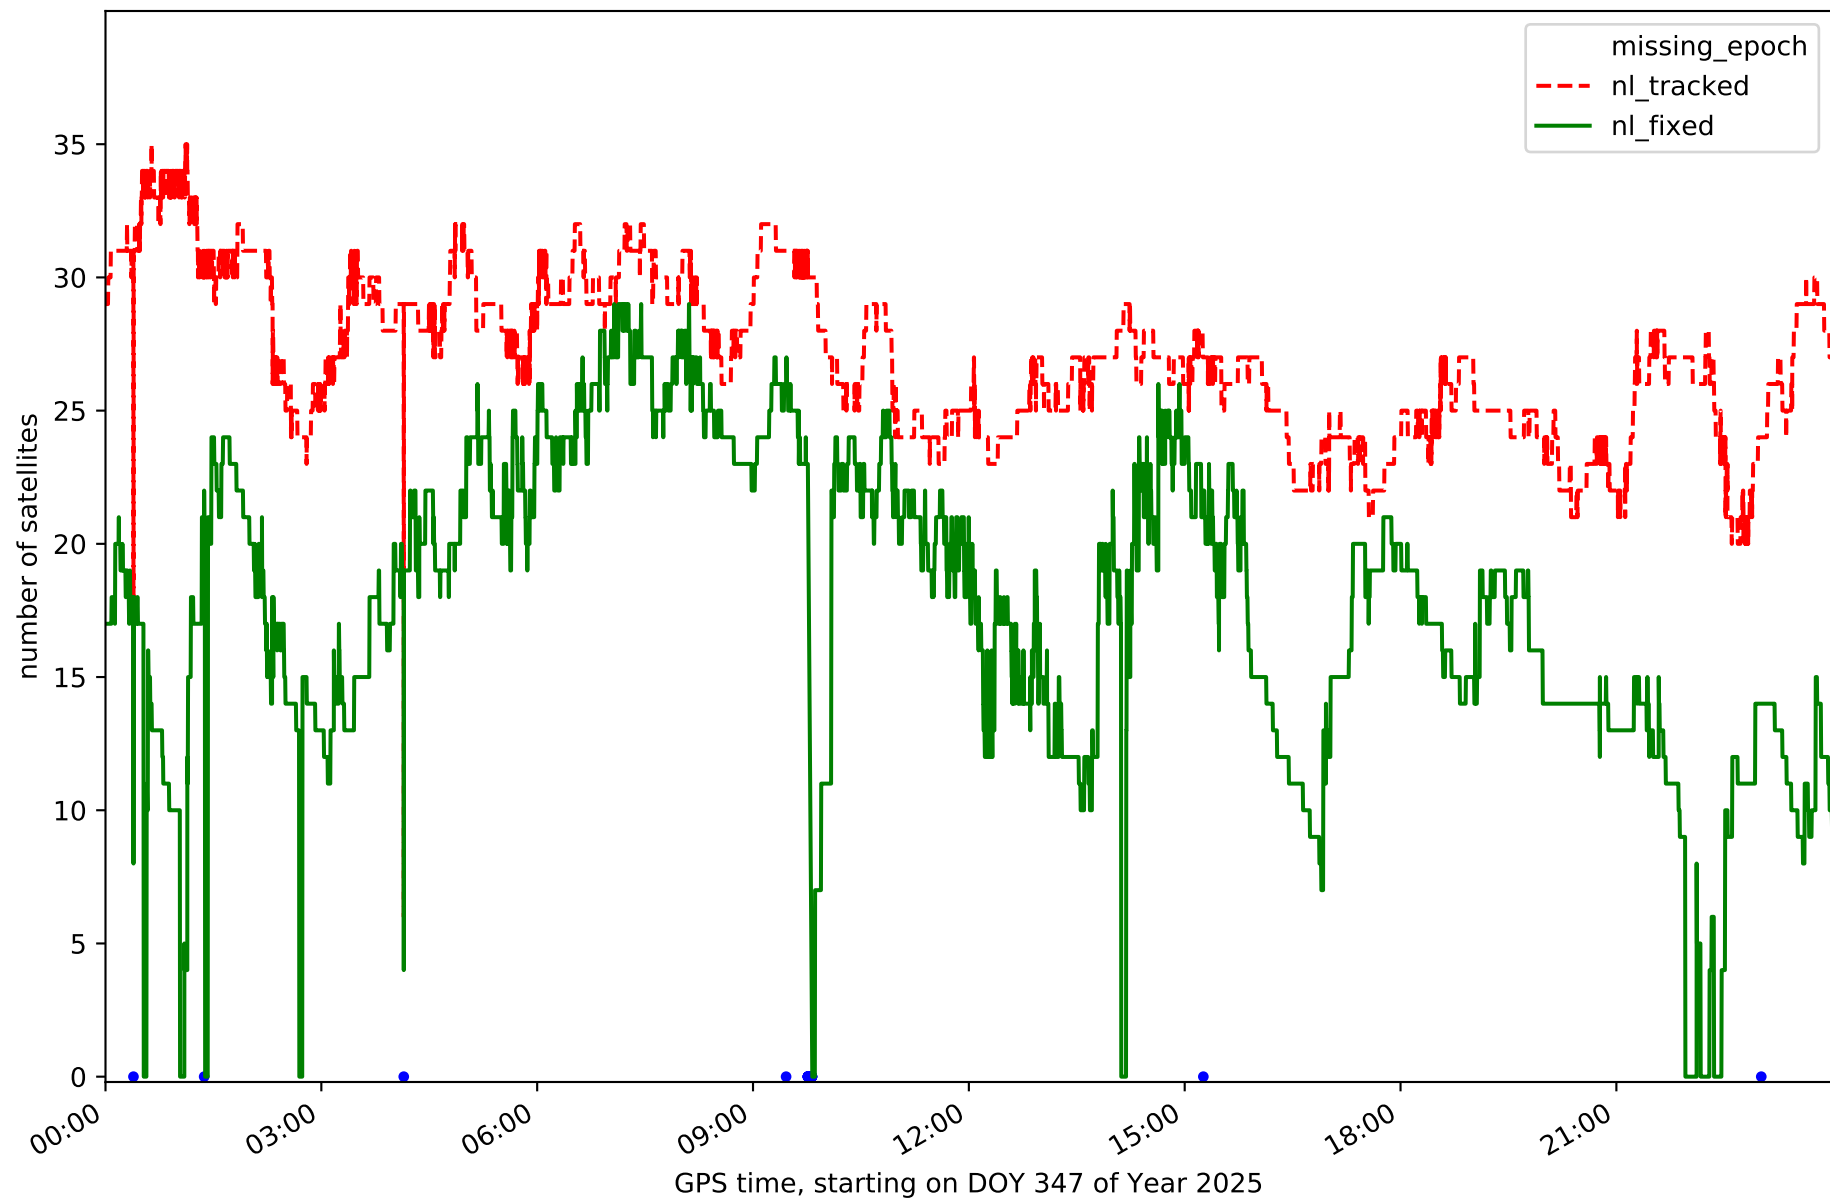


Station LRES in network N32T

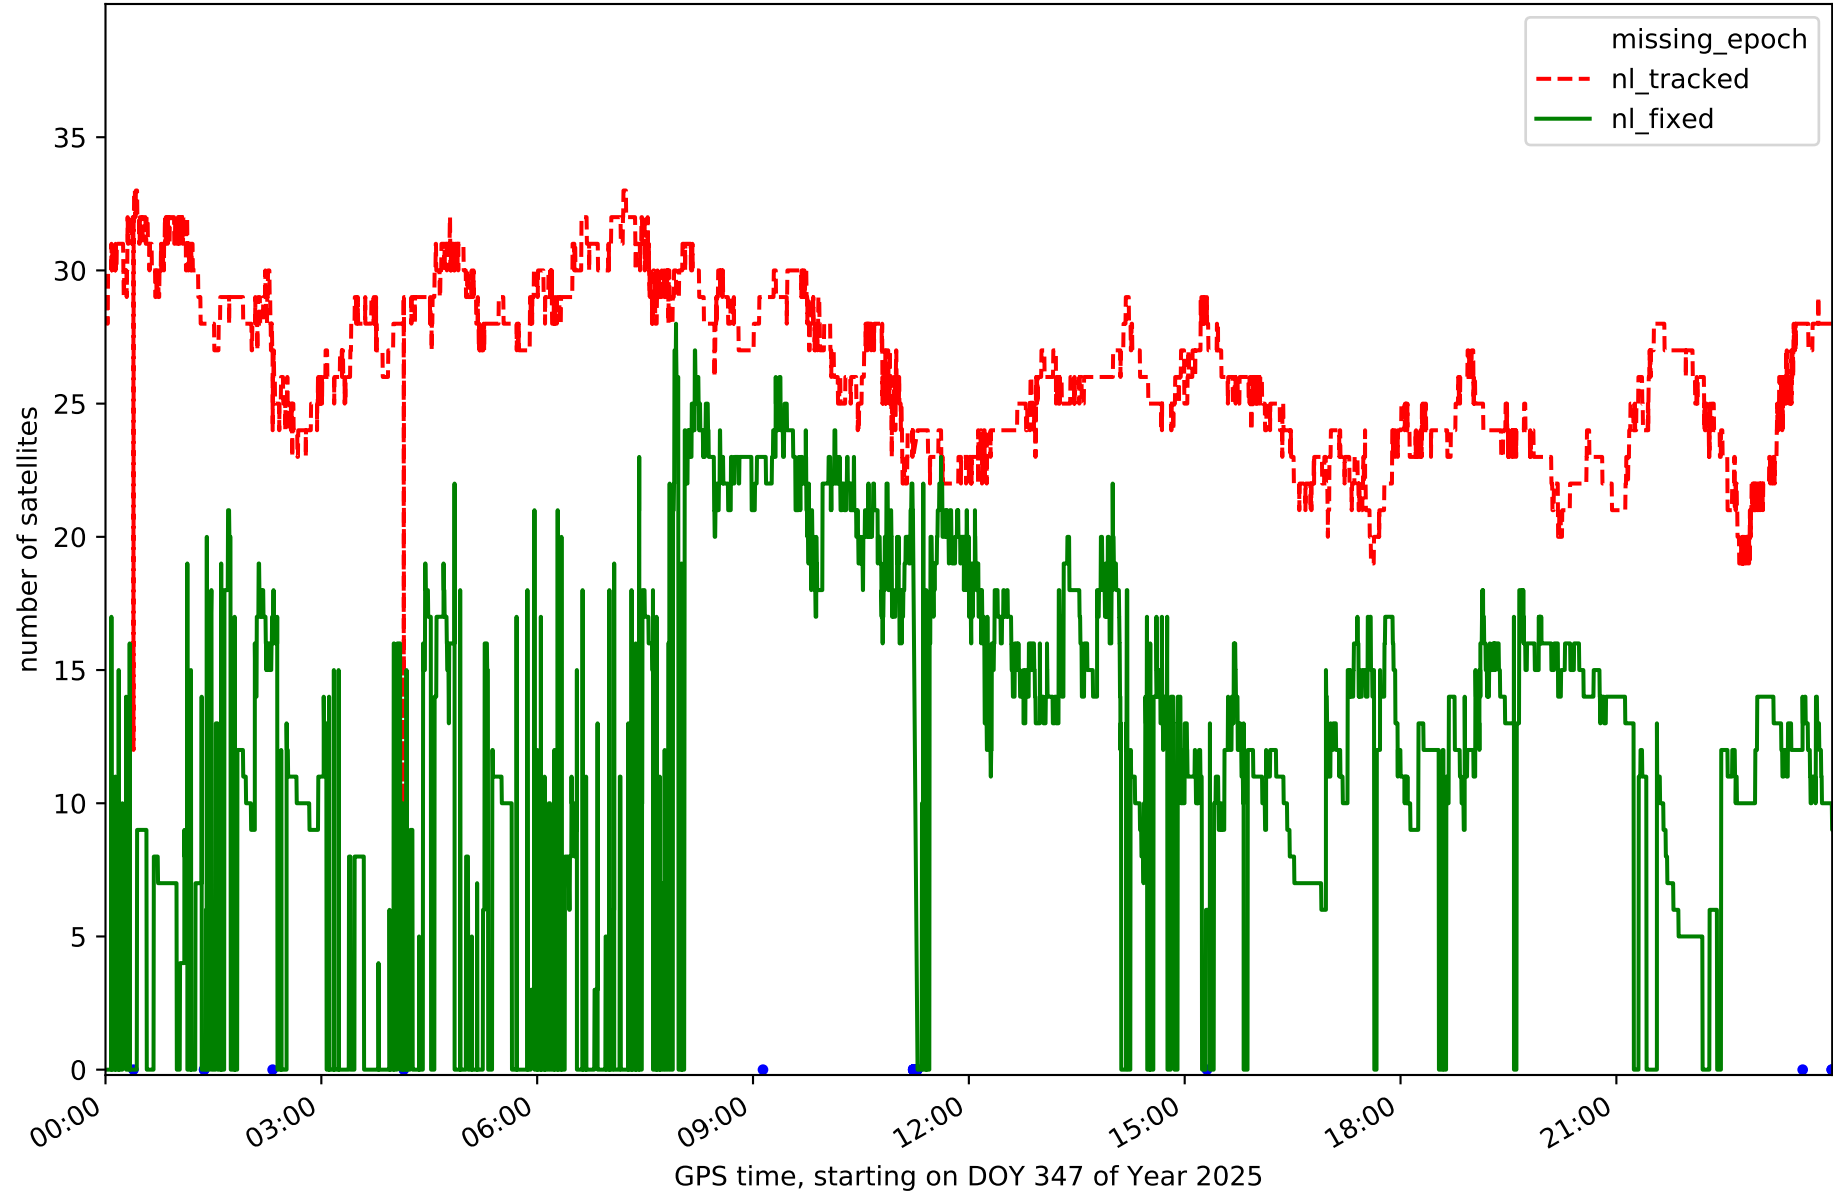


Station TN01 in network N32T

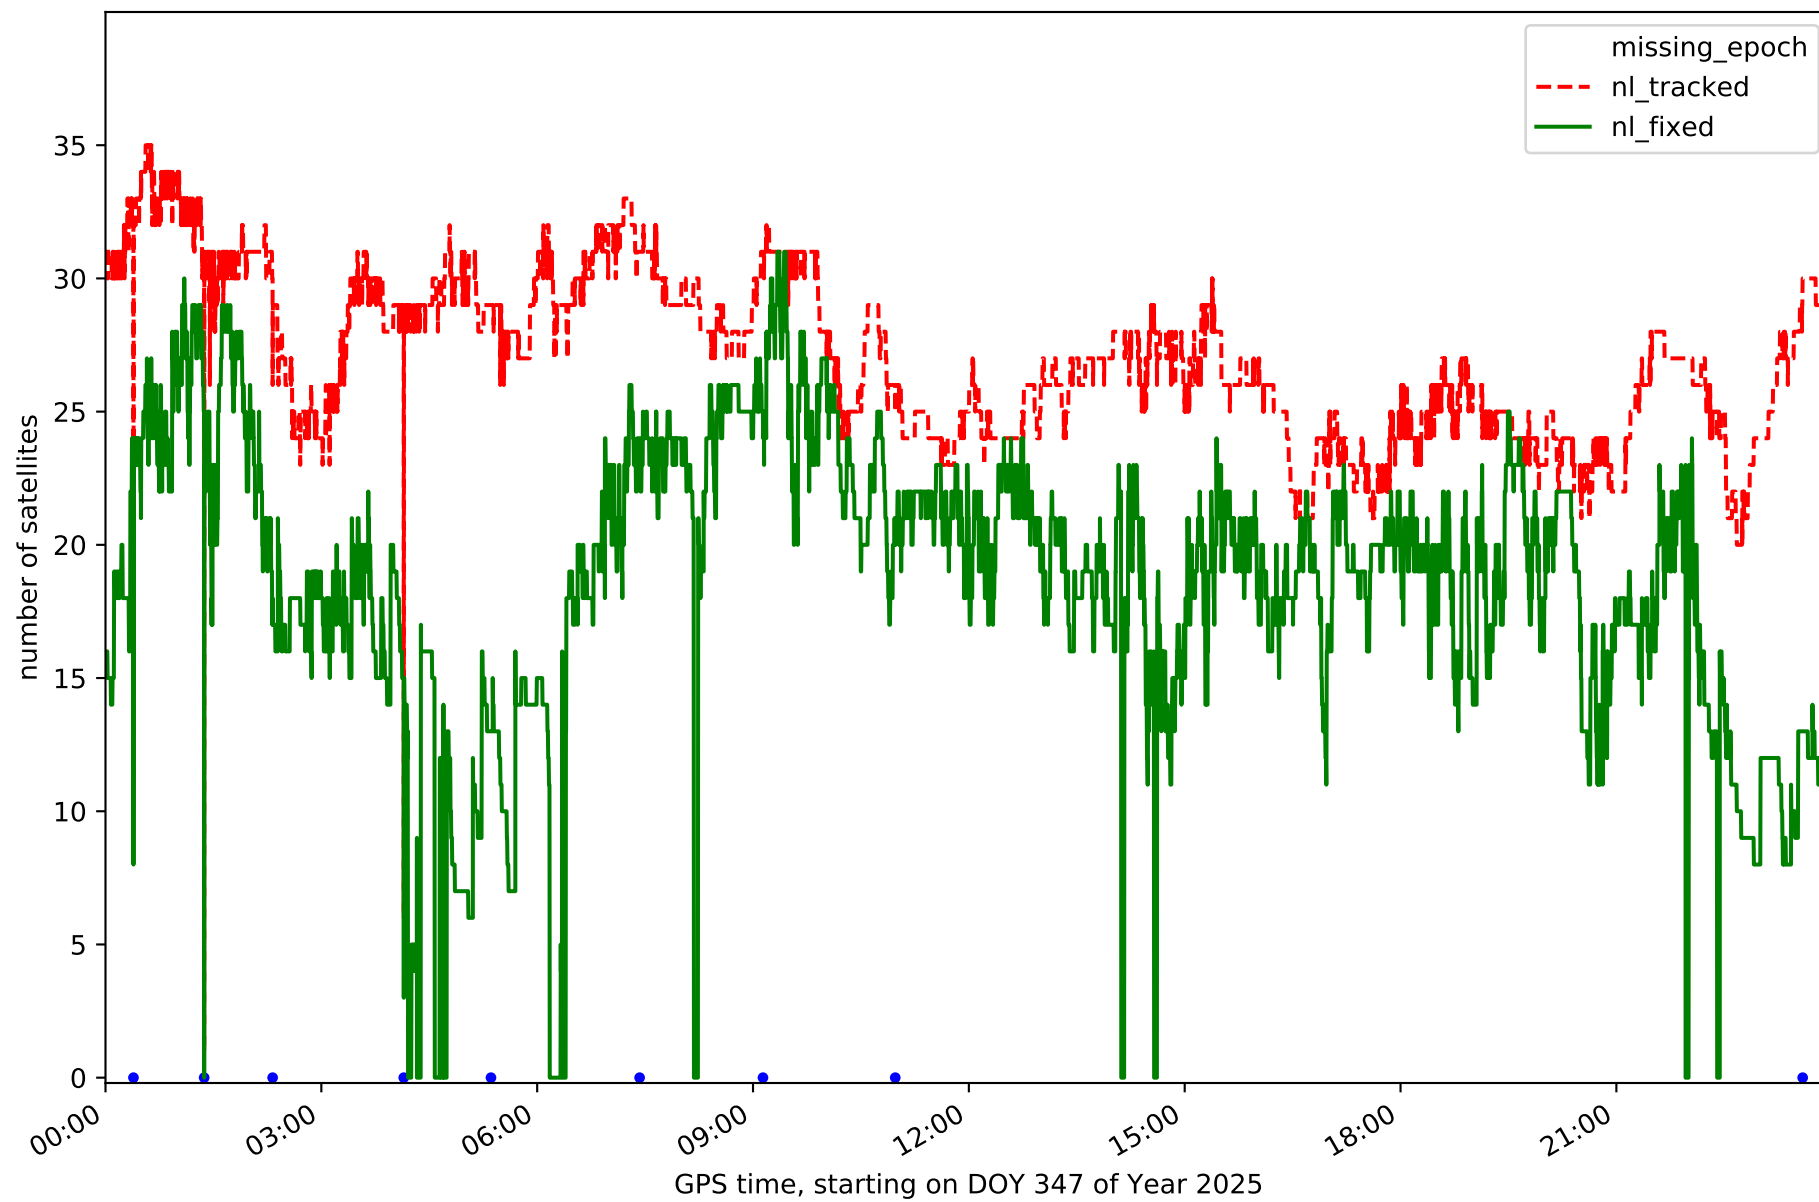


Station TN02 in network N32T

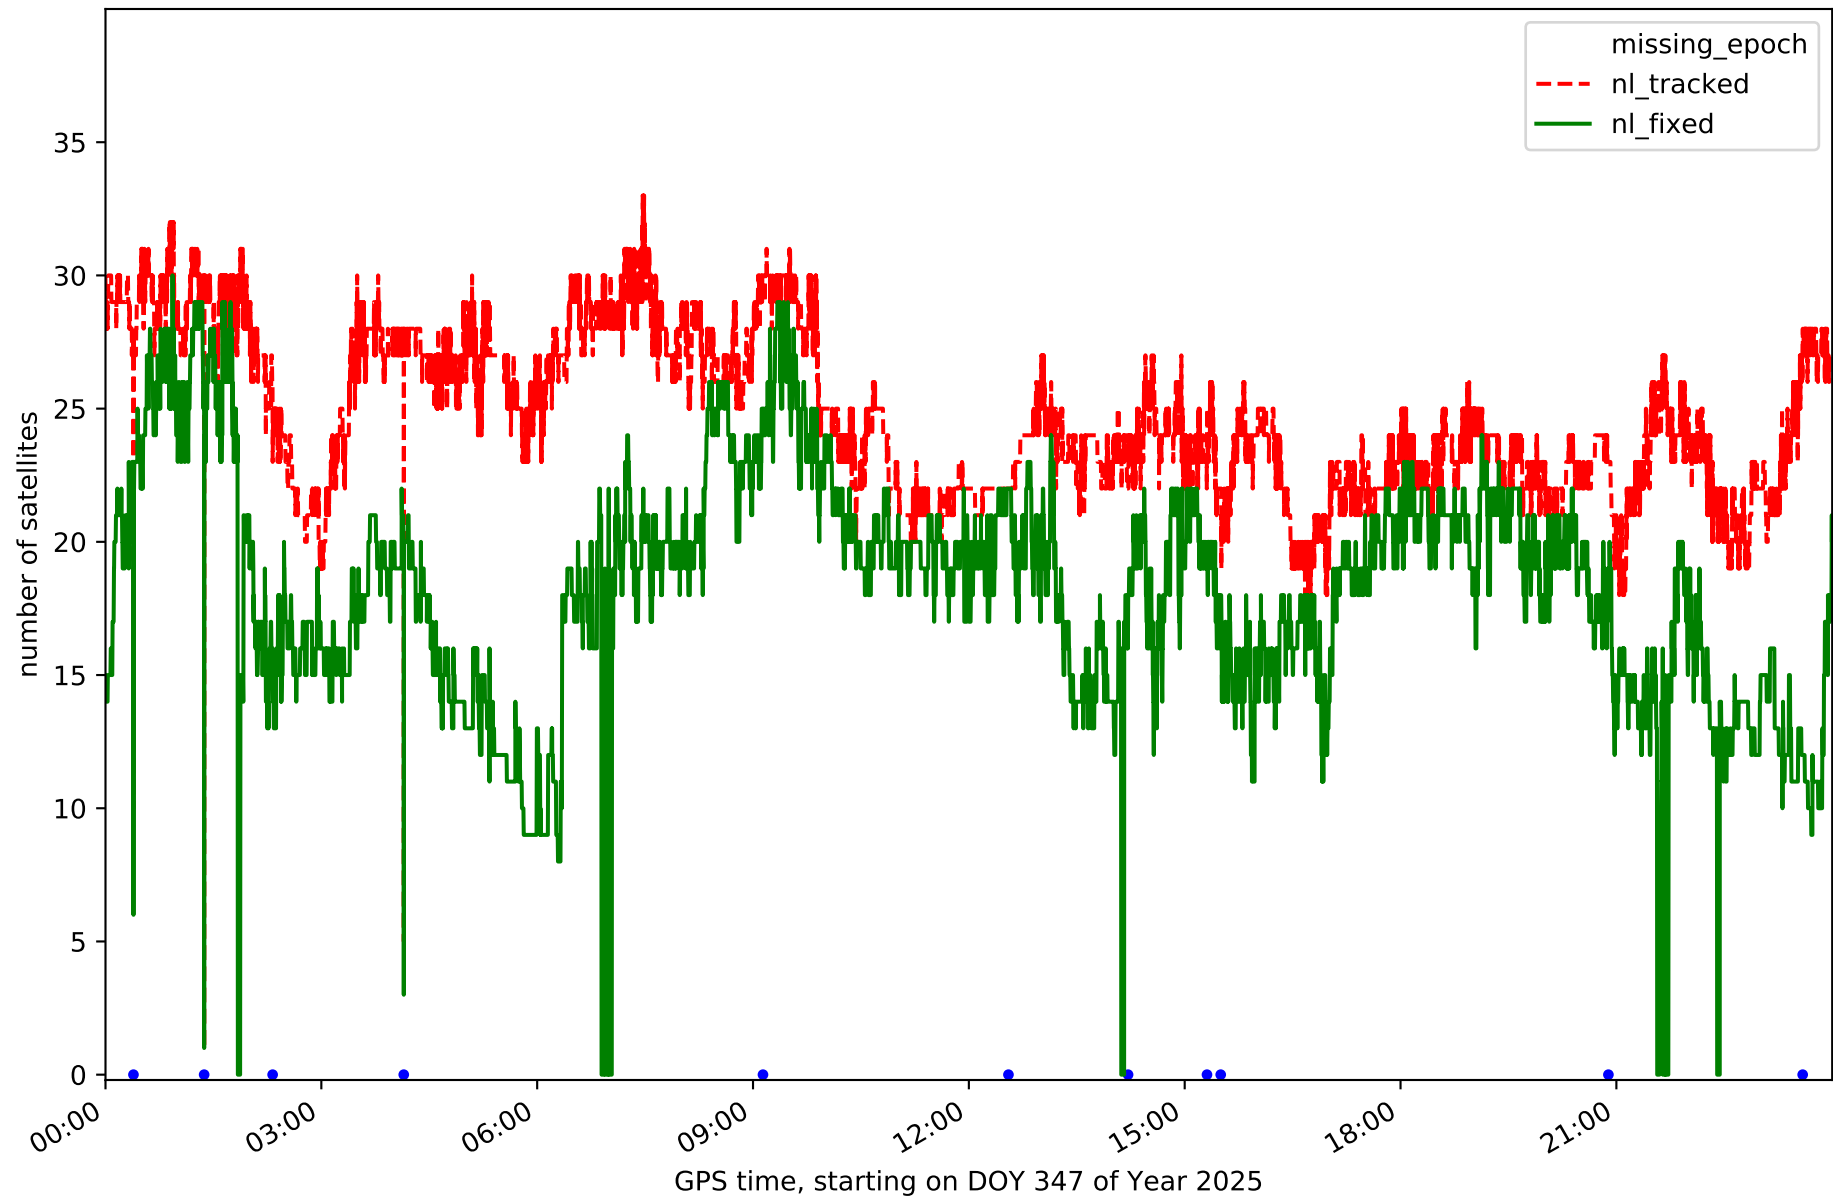


Station TN03 in network N32T

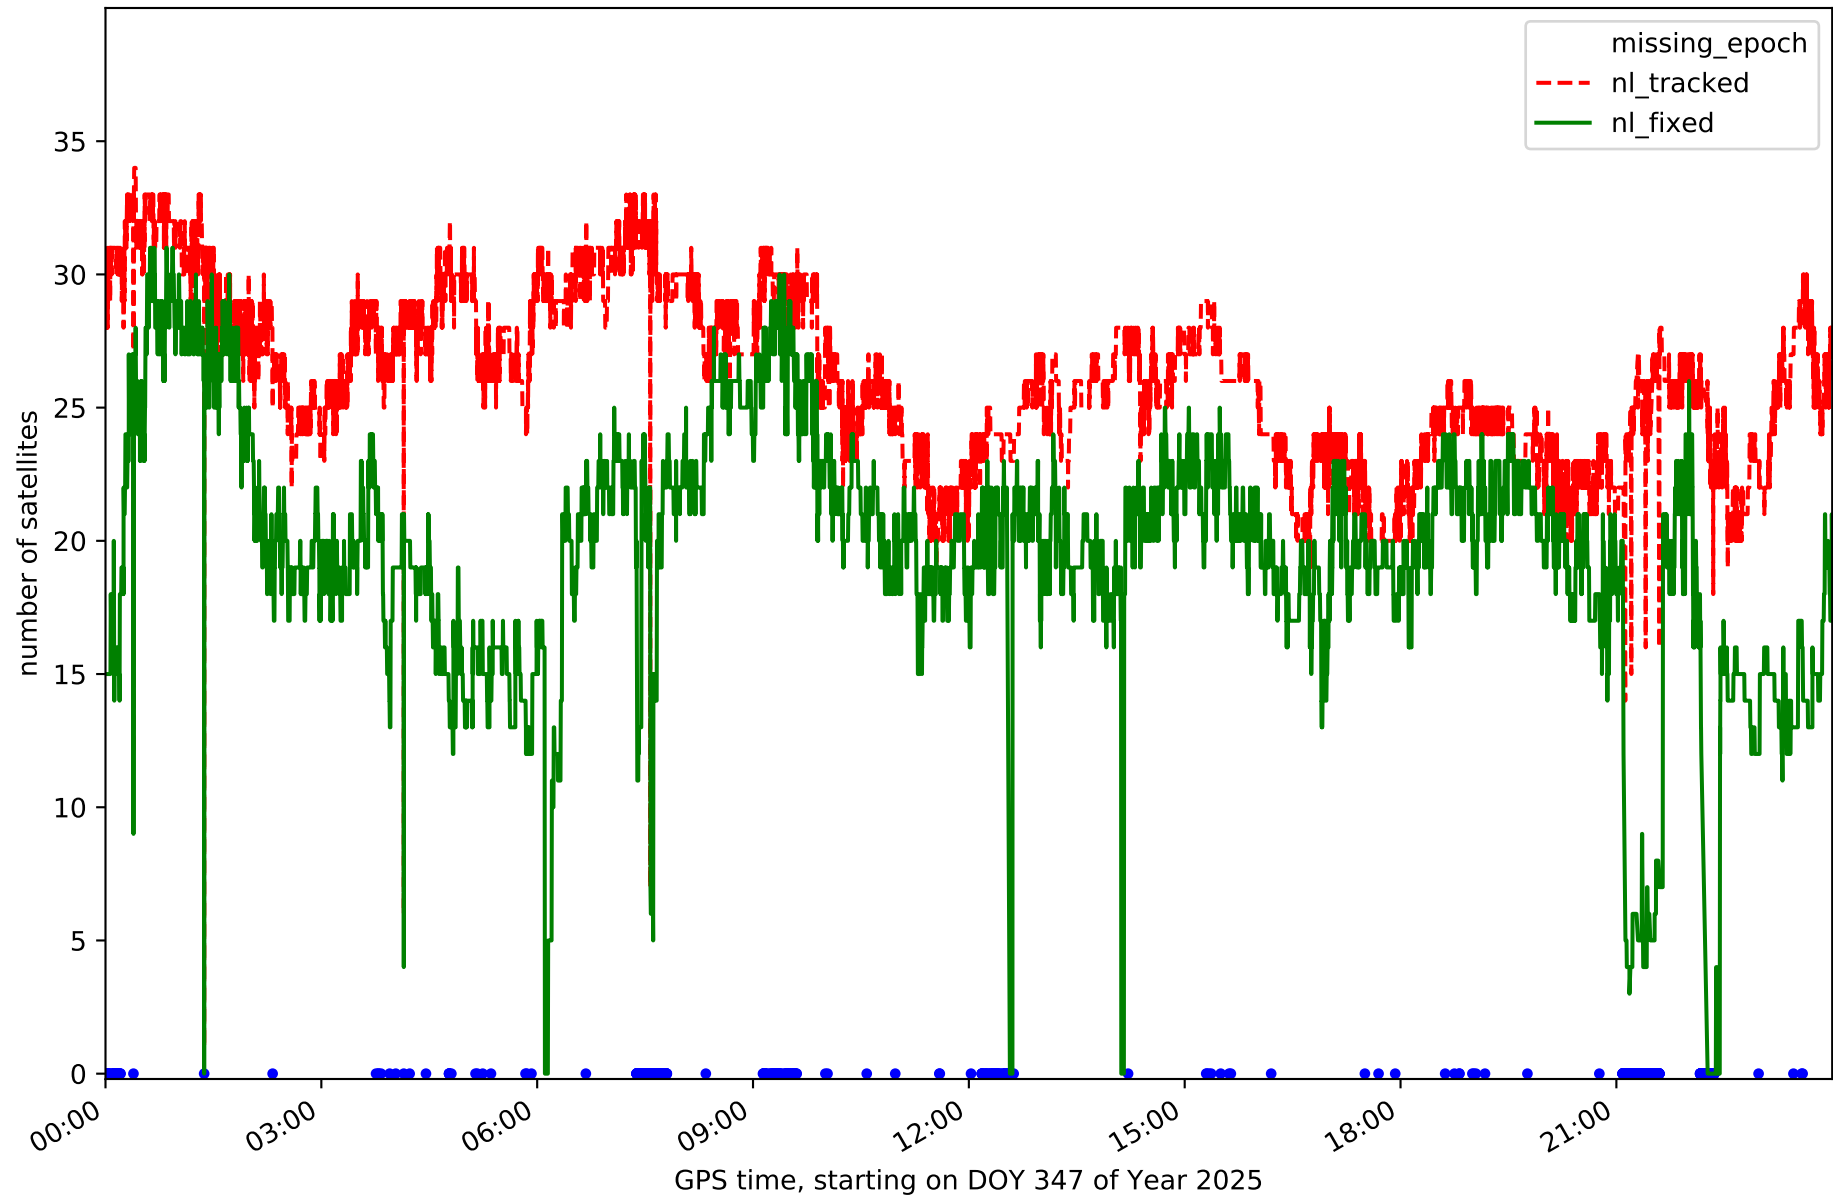


Station TN06 in network N32T

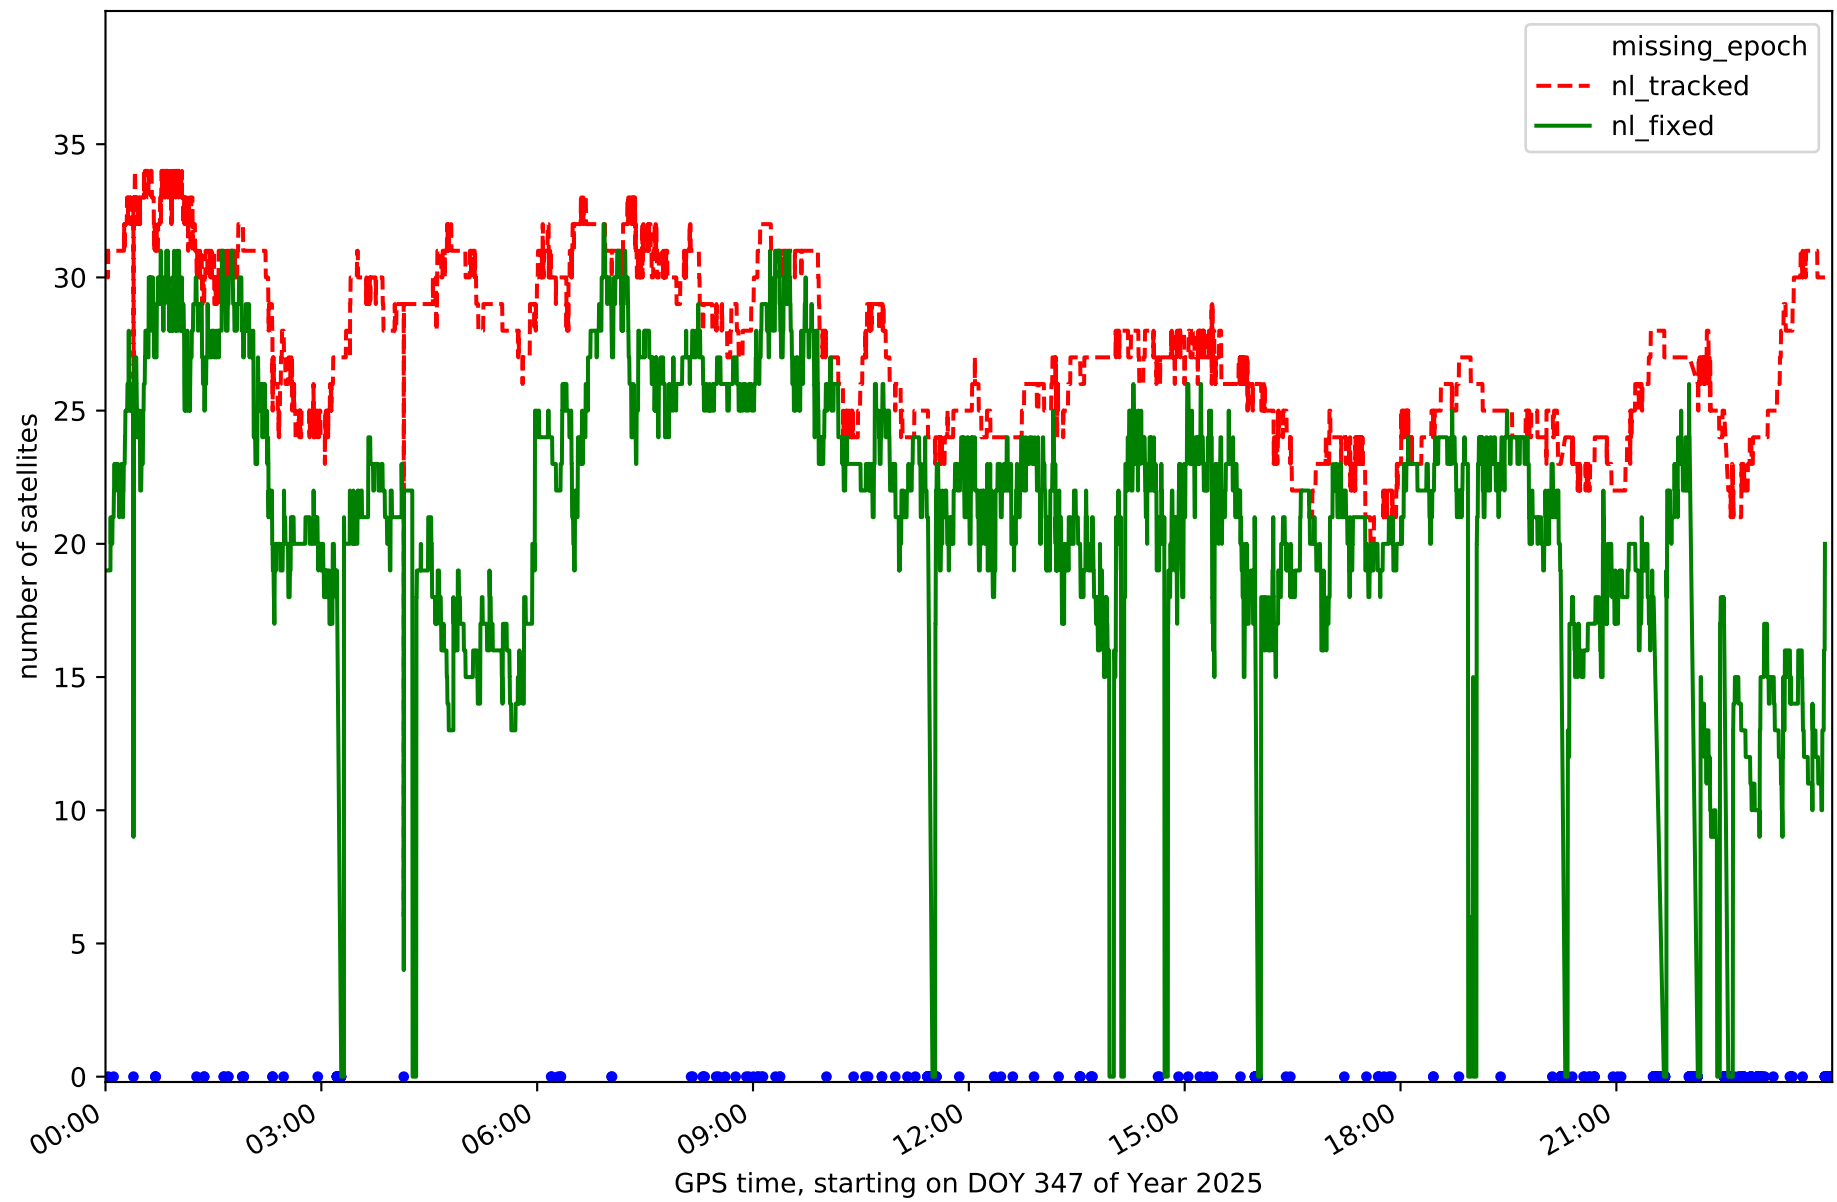


Station TN09 in network N32T

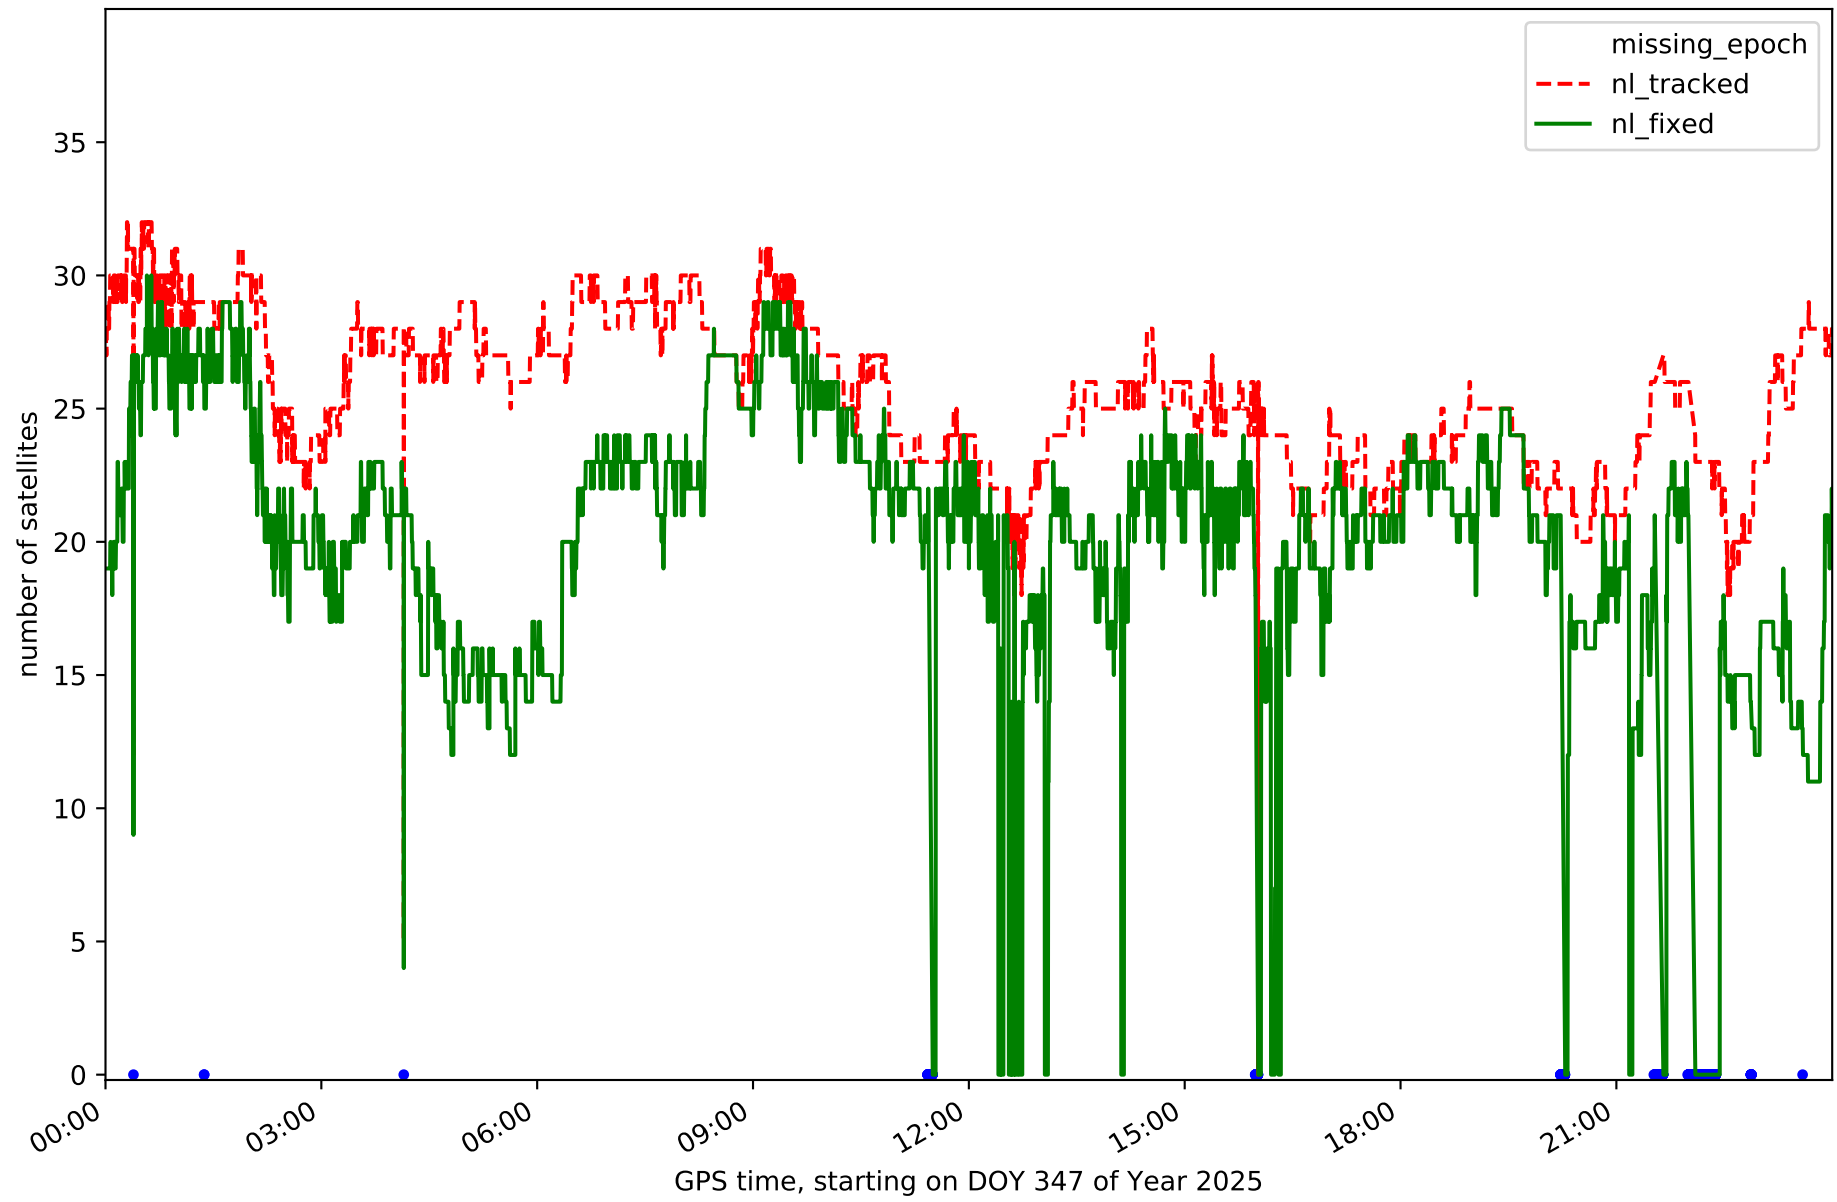


Station TE11 in network N32T

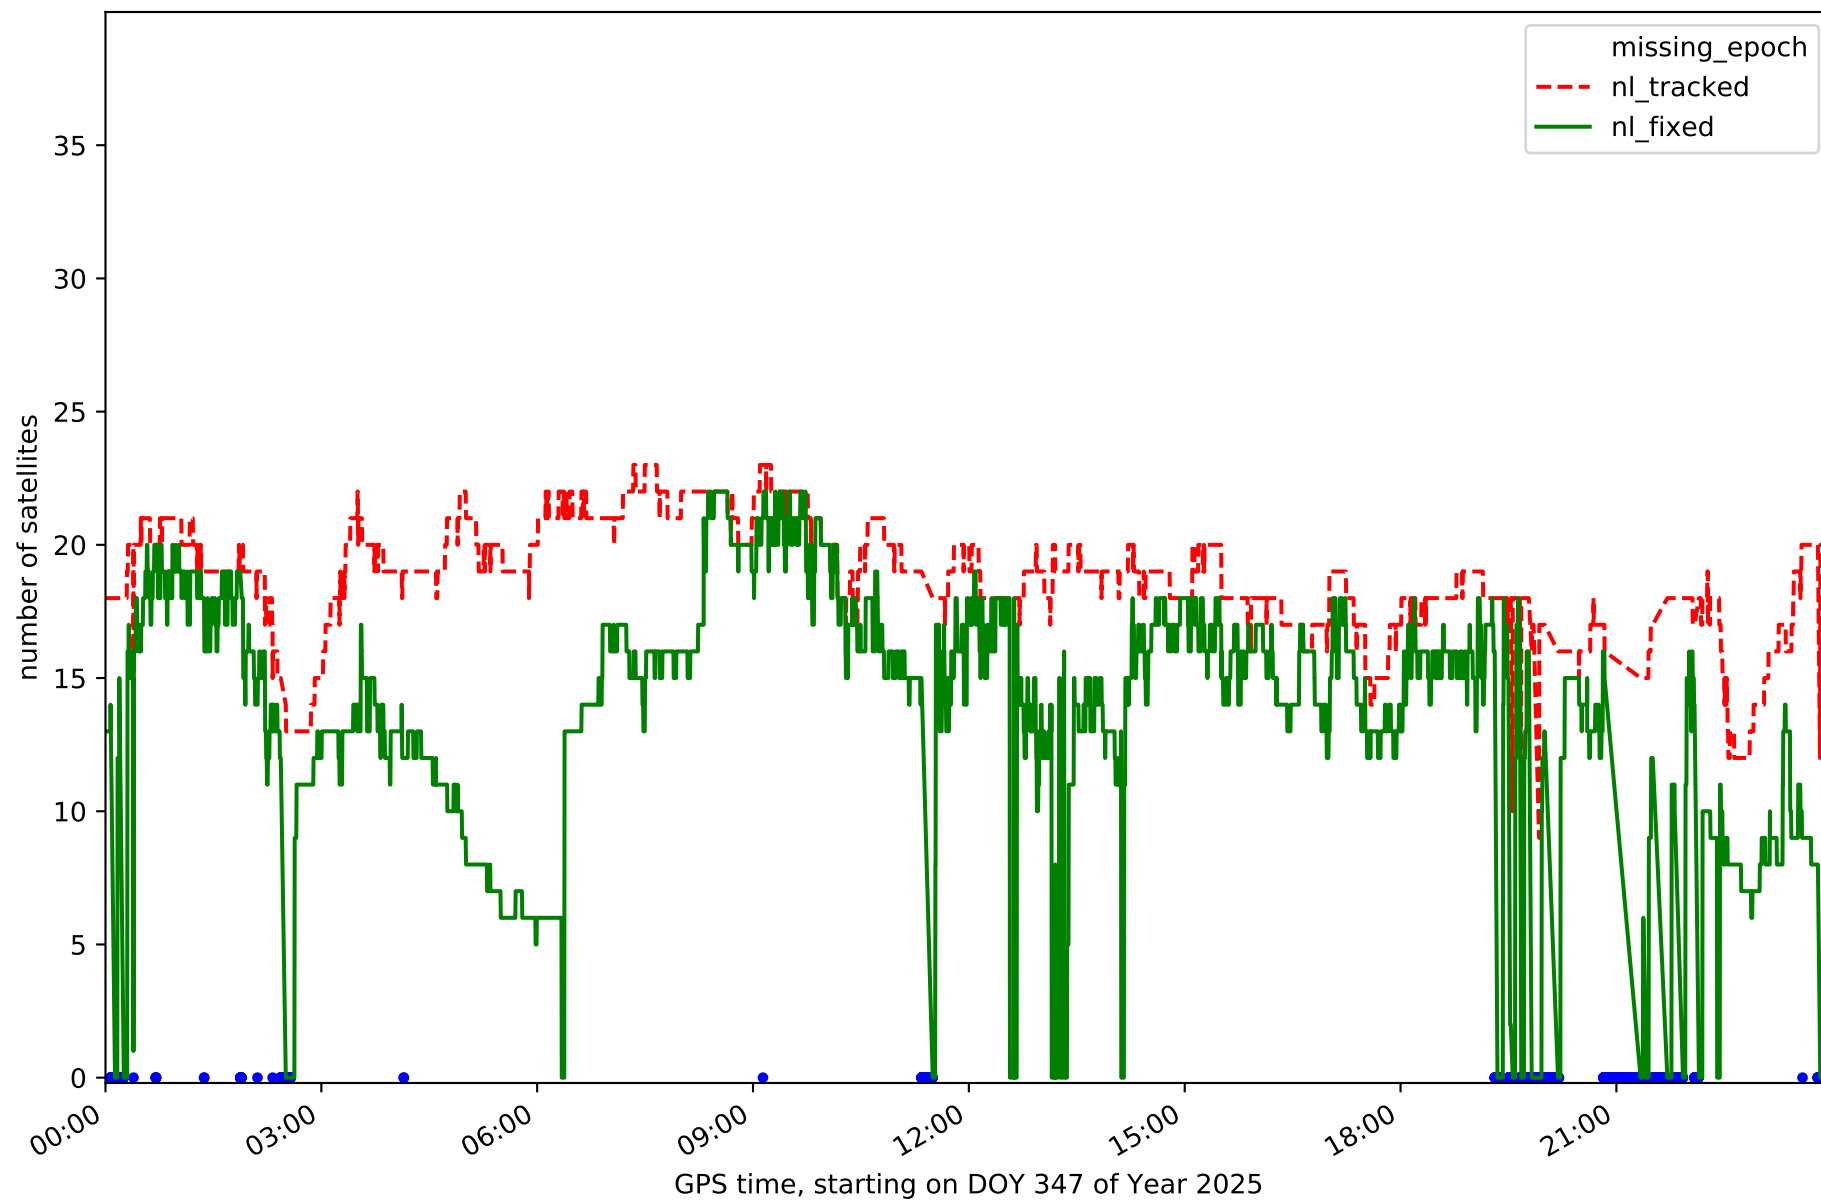


RefCheck for station EH01 in network N32T

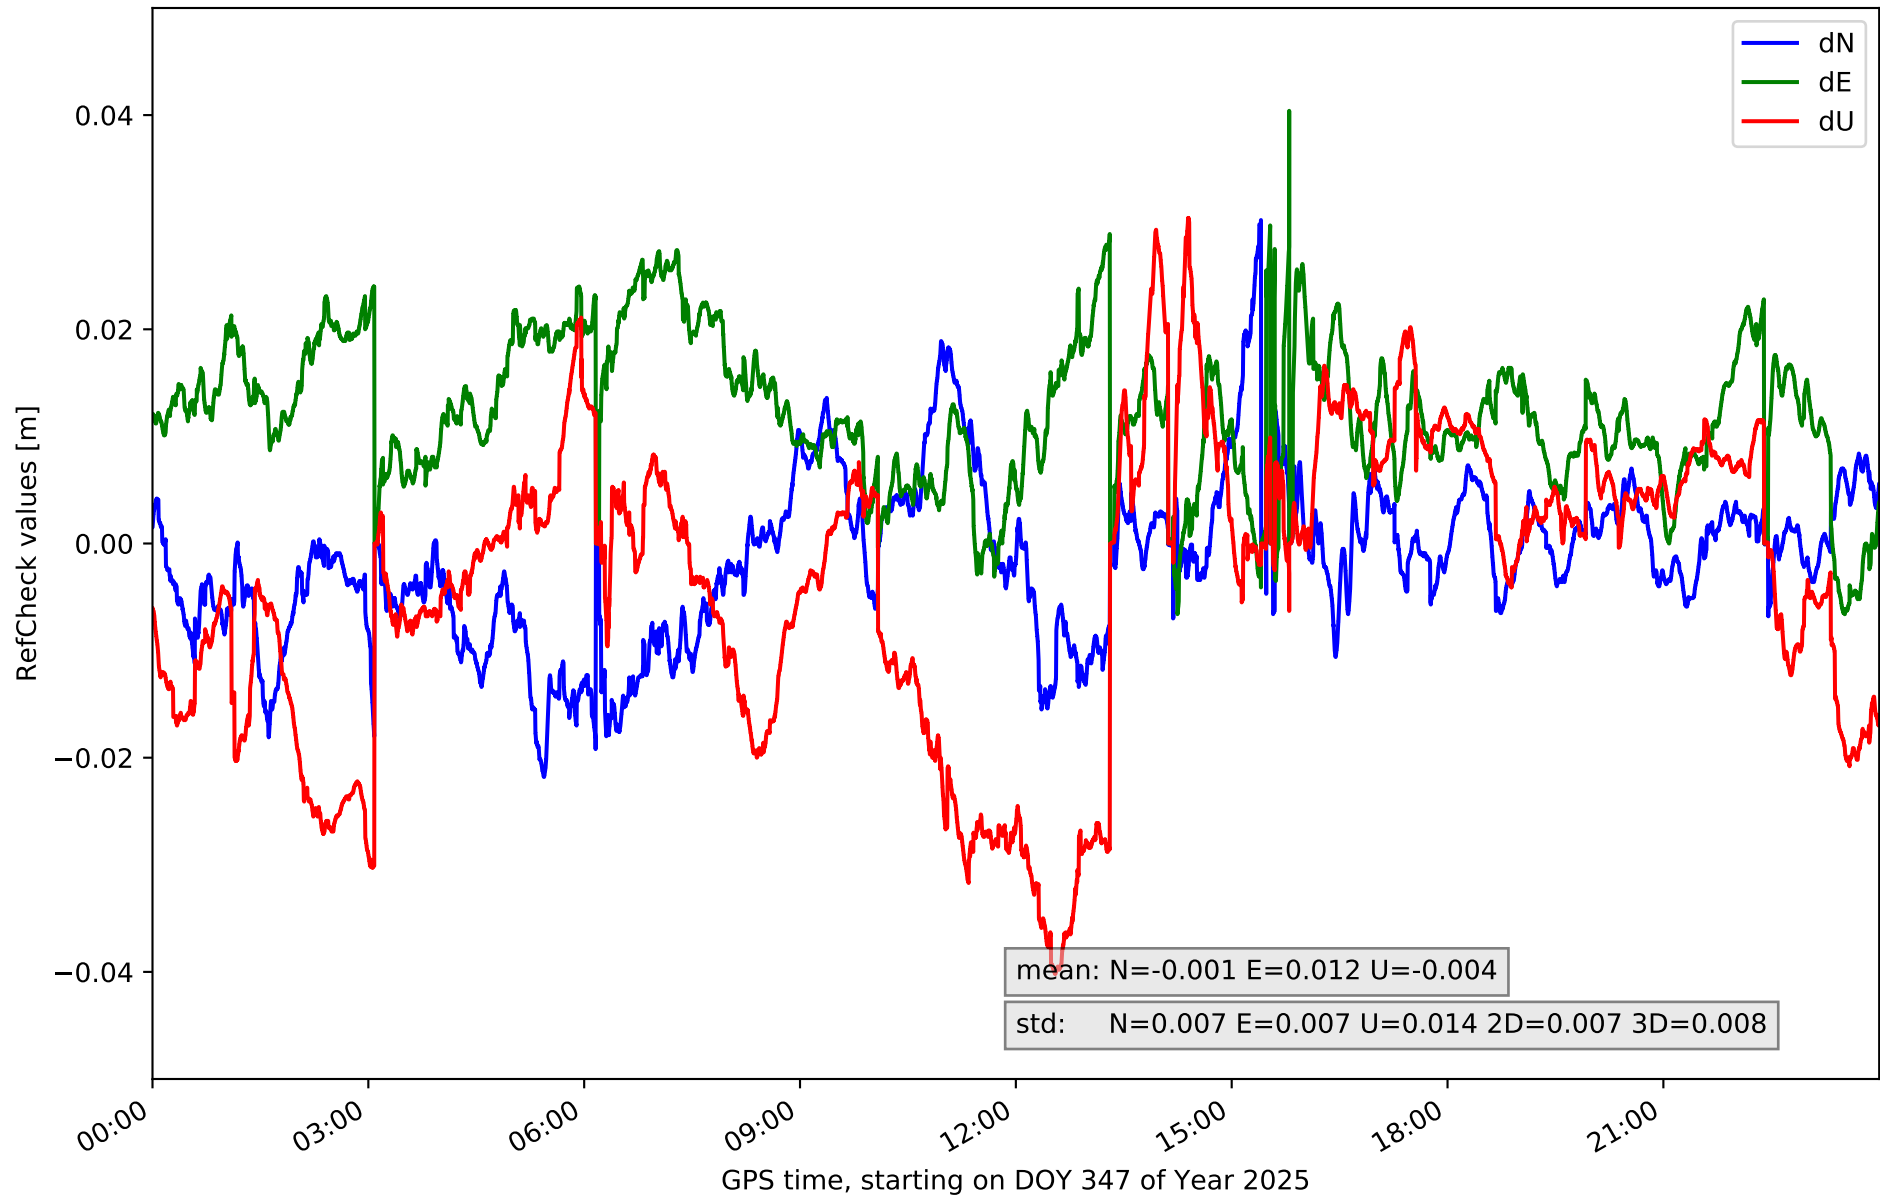


RefCheck for station EH02 in network N32T

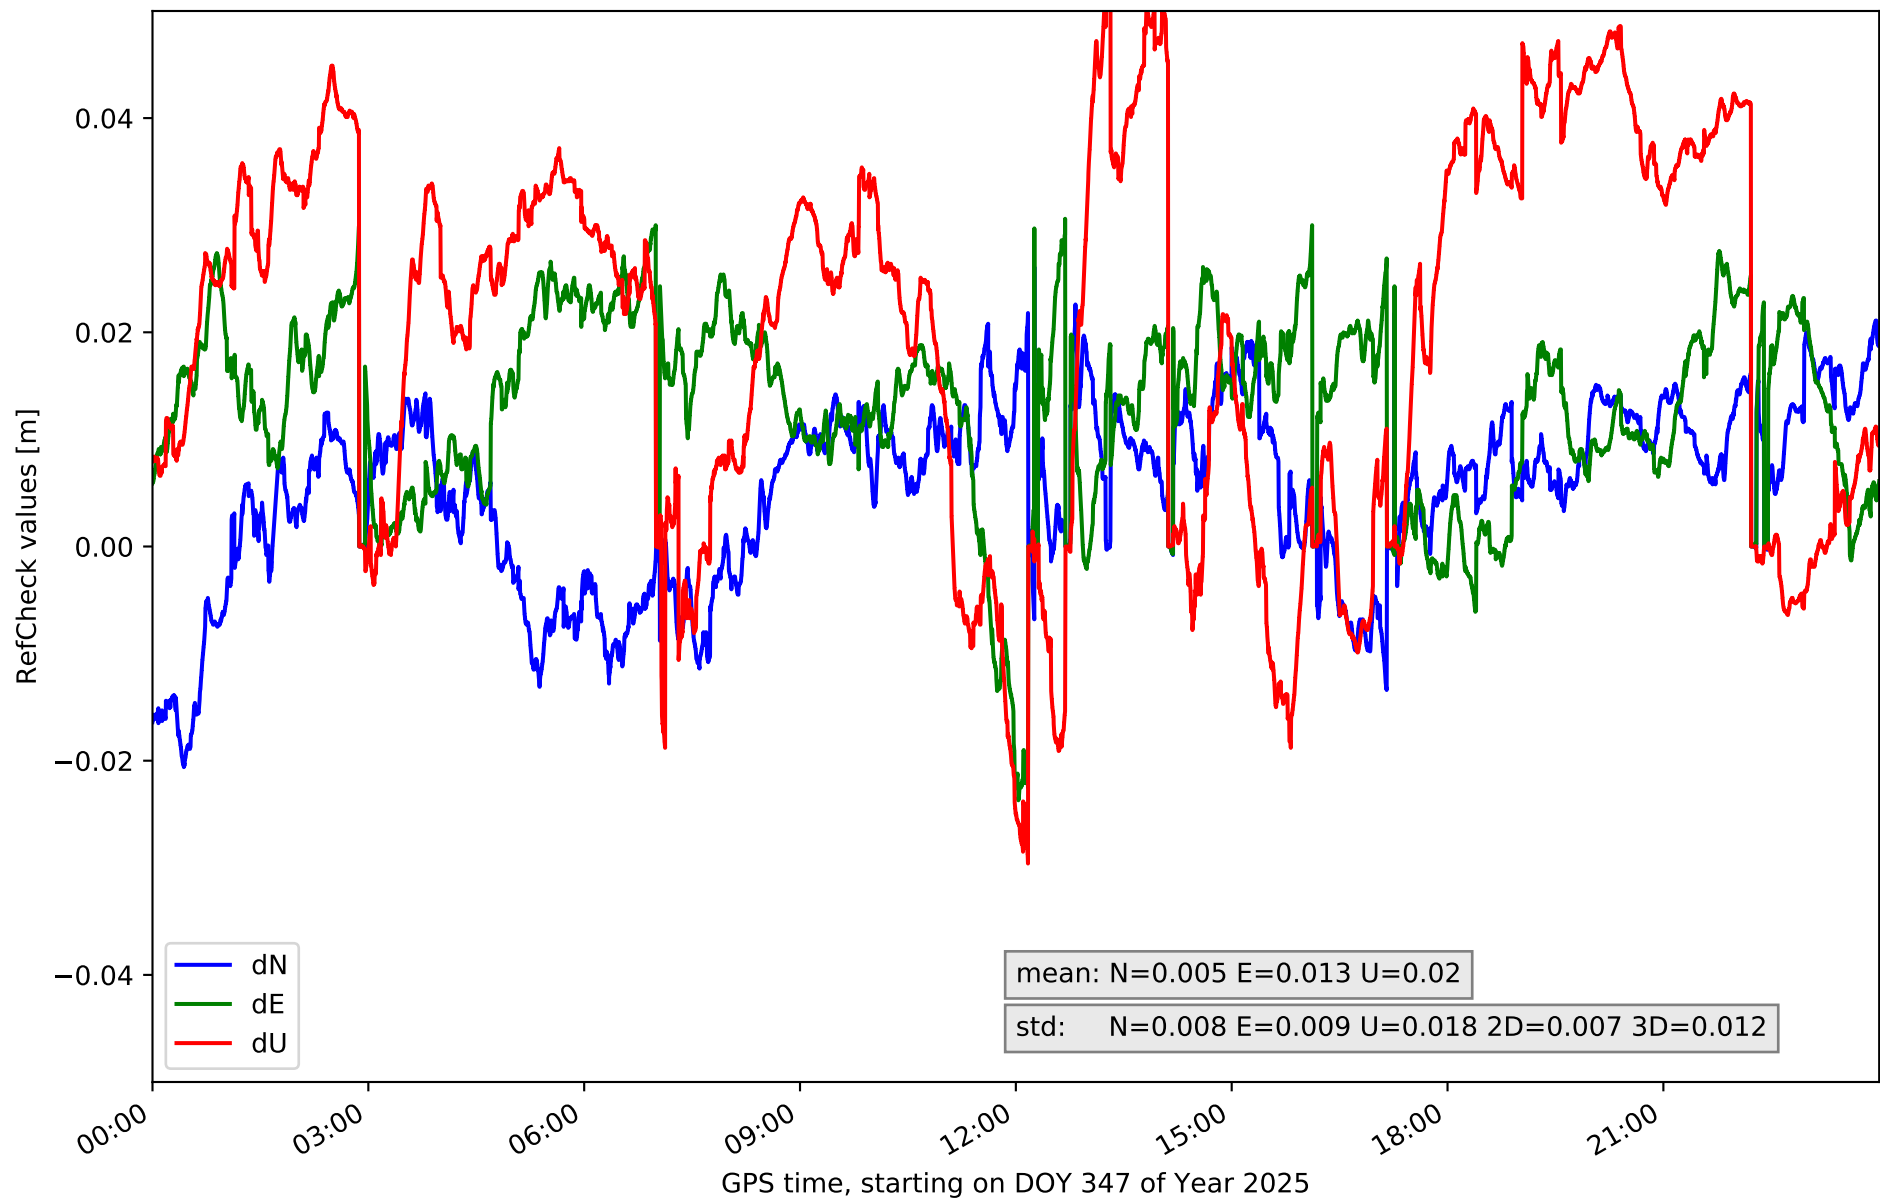


RefCheck for station GOM1 in network N32T

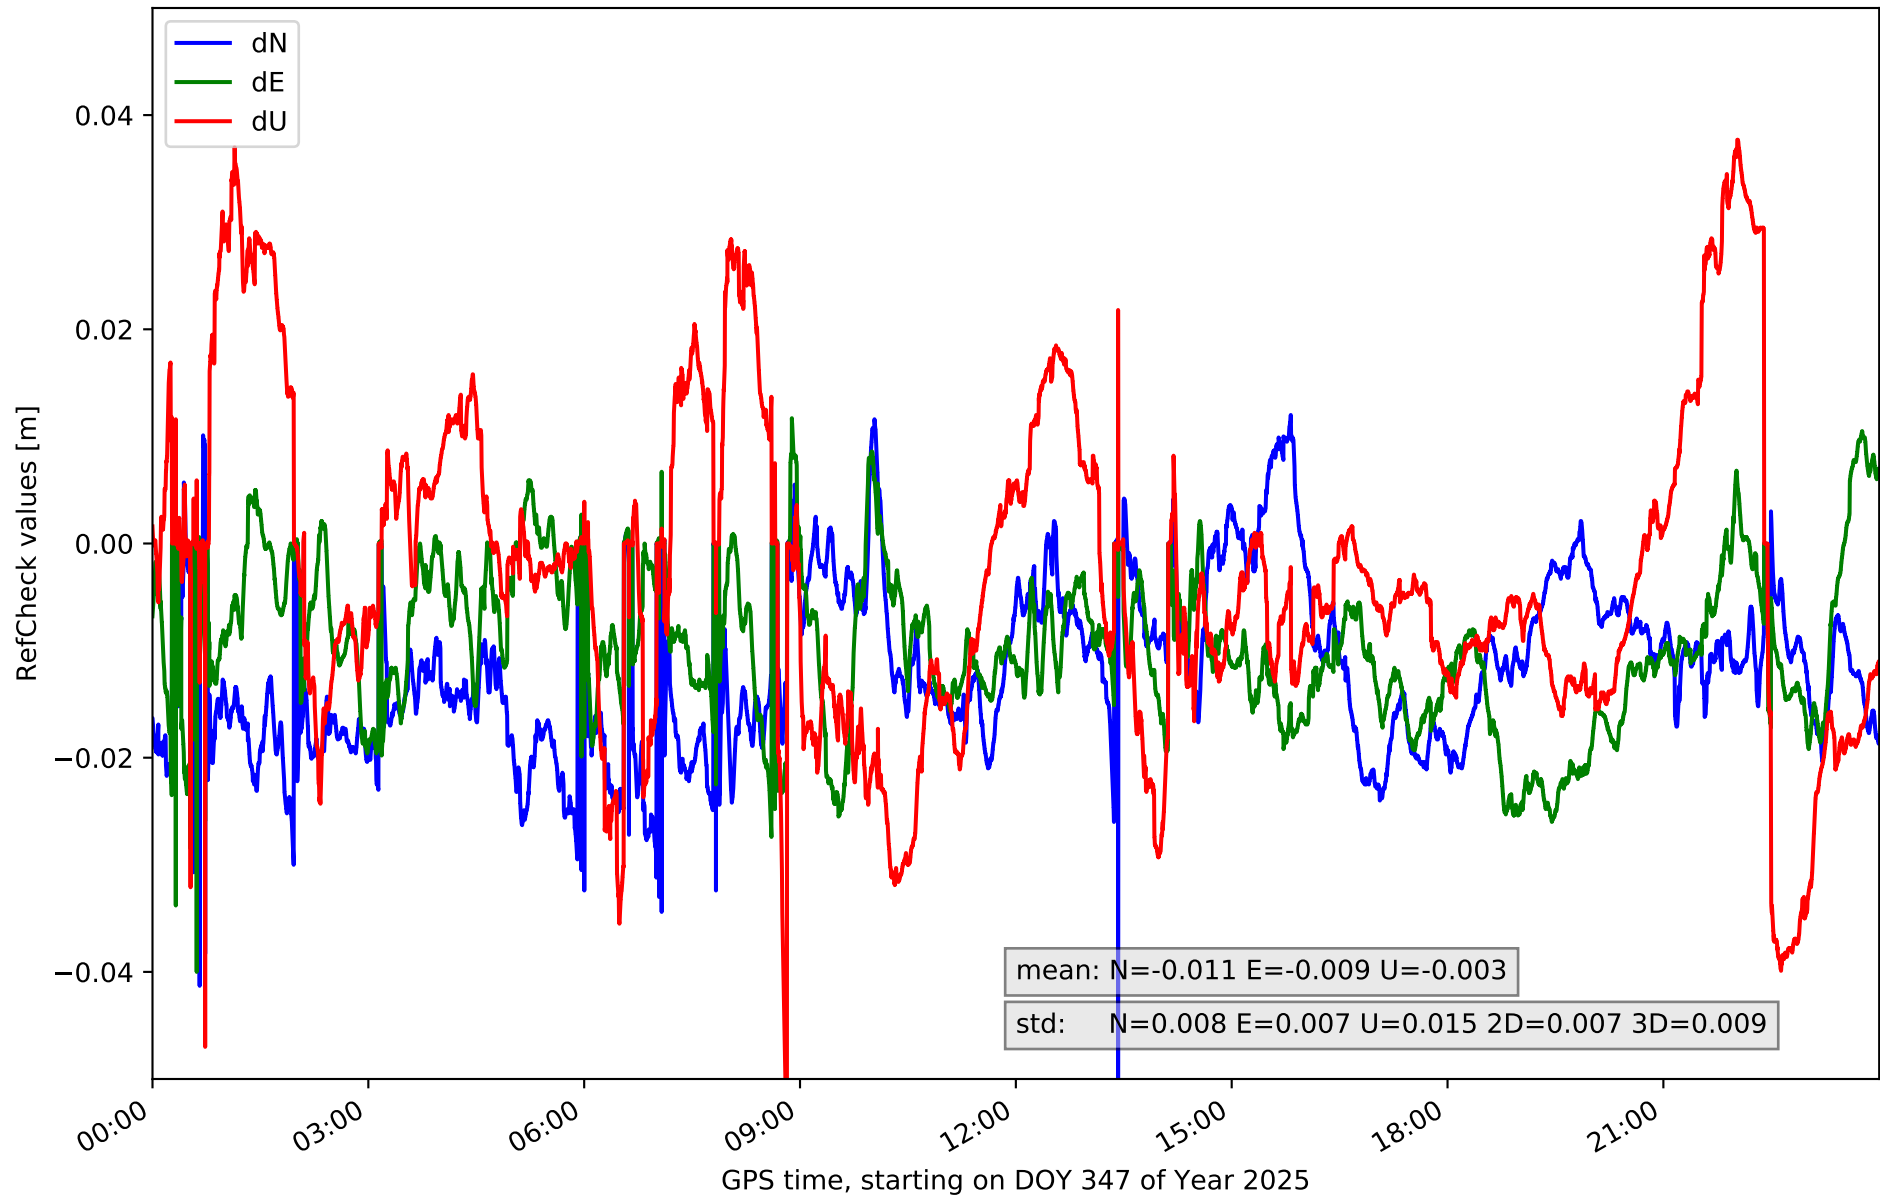


RefCheck for station GOME in network N32T

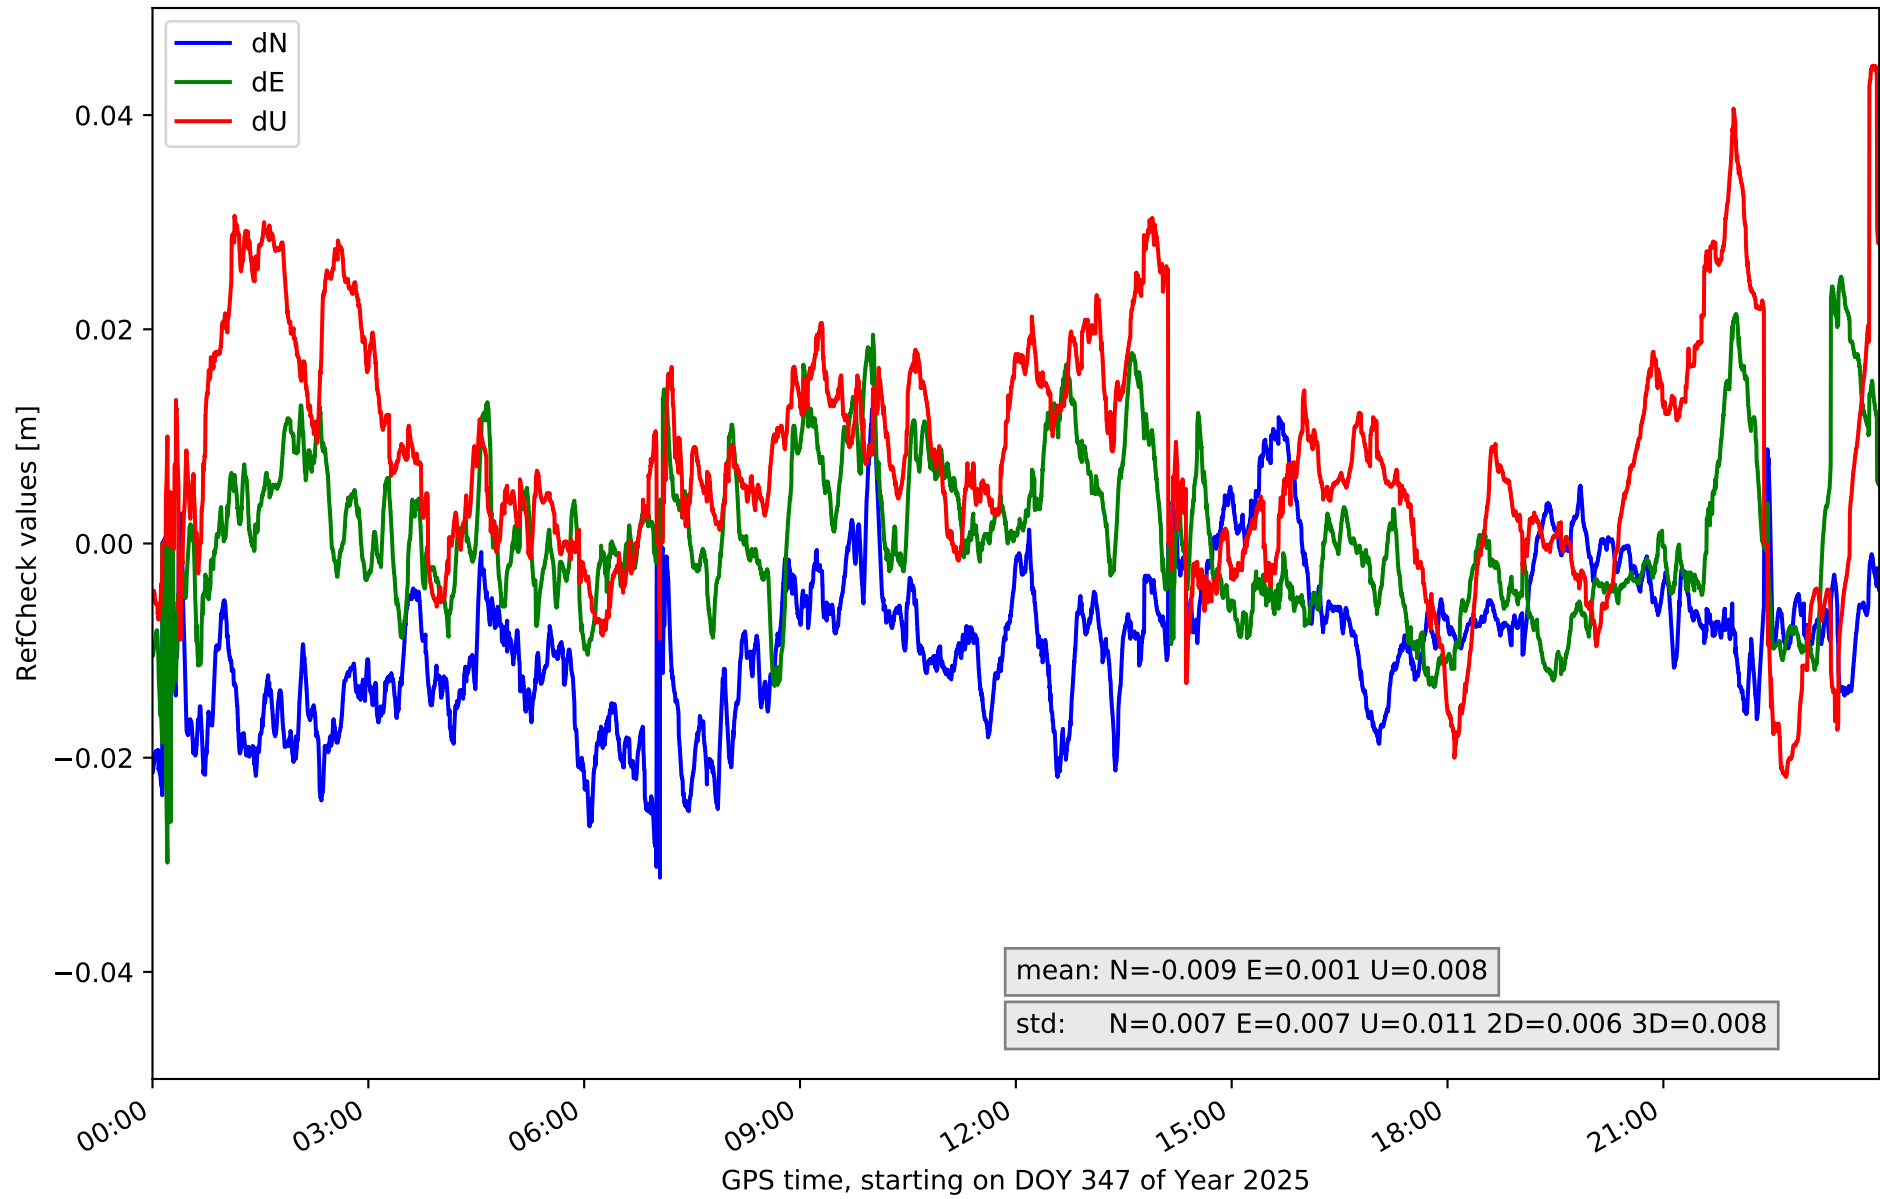


RefCheck for station IZAN in network N32T

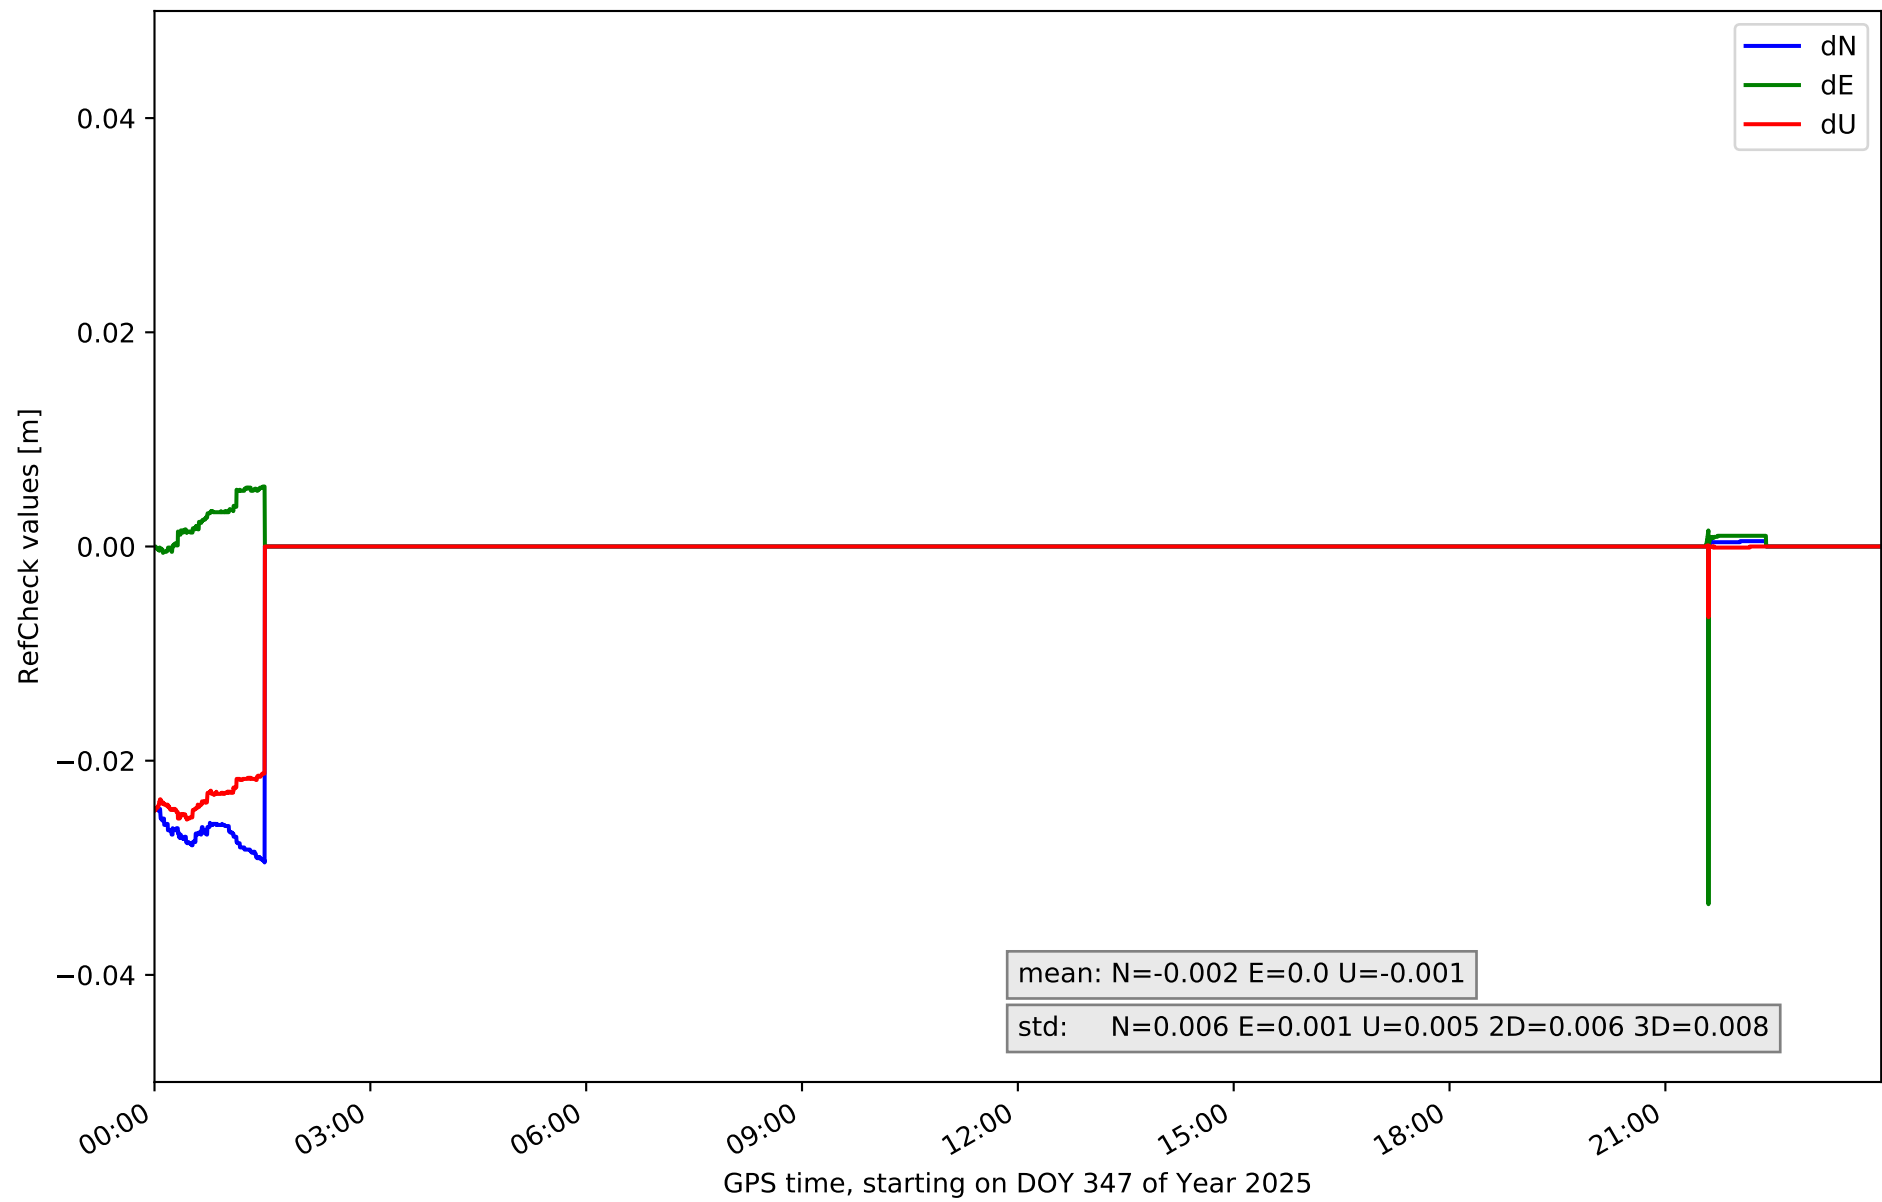


RefCheck for station LP01 in network N32T

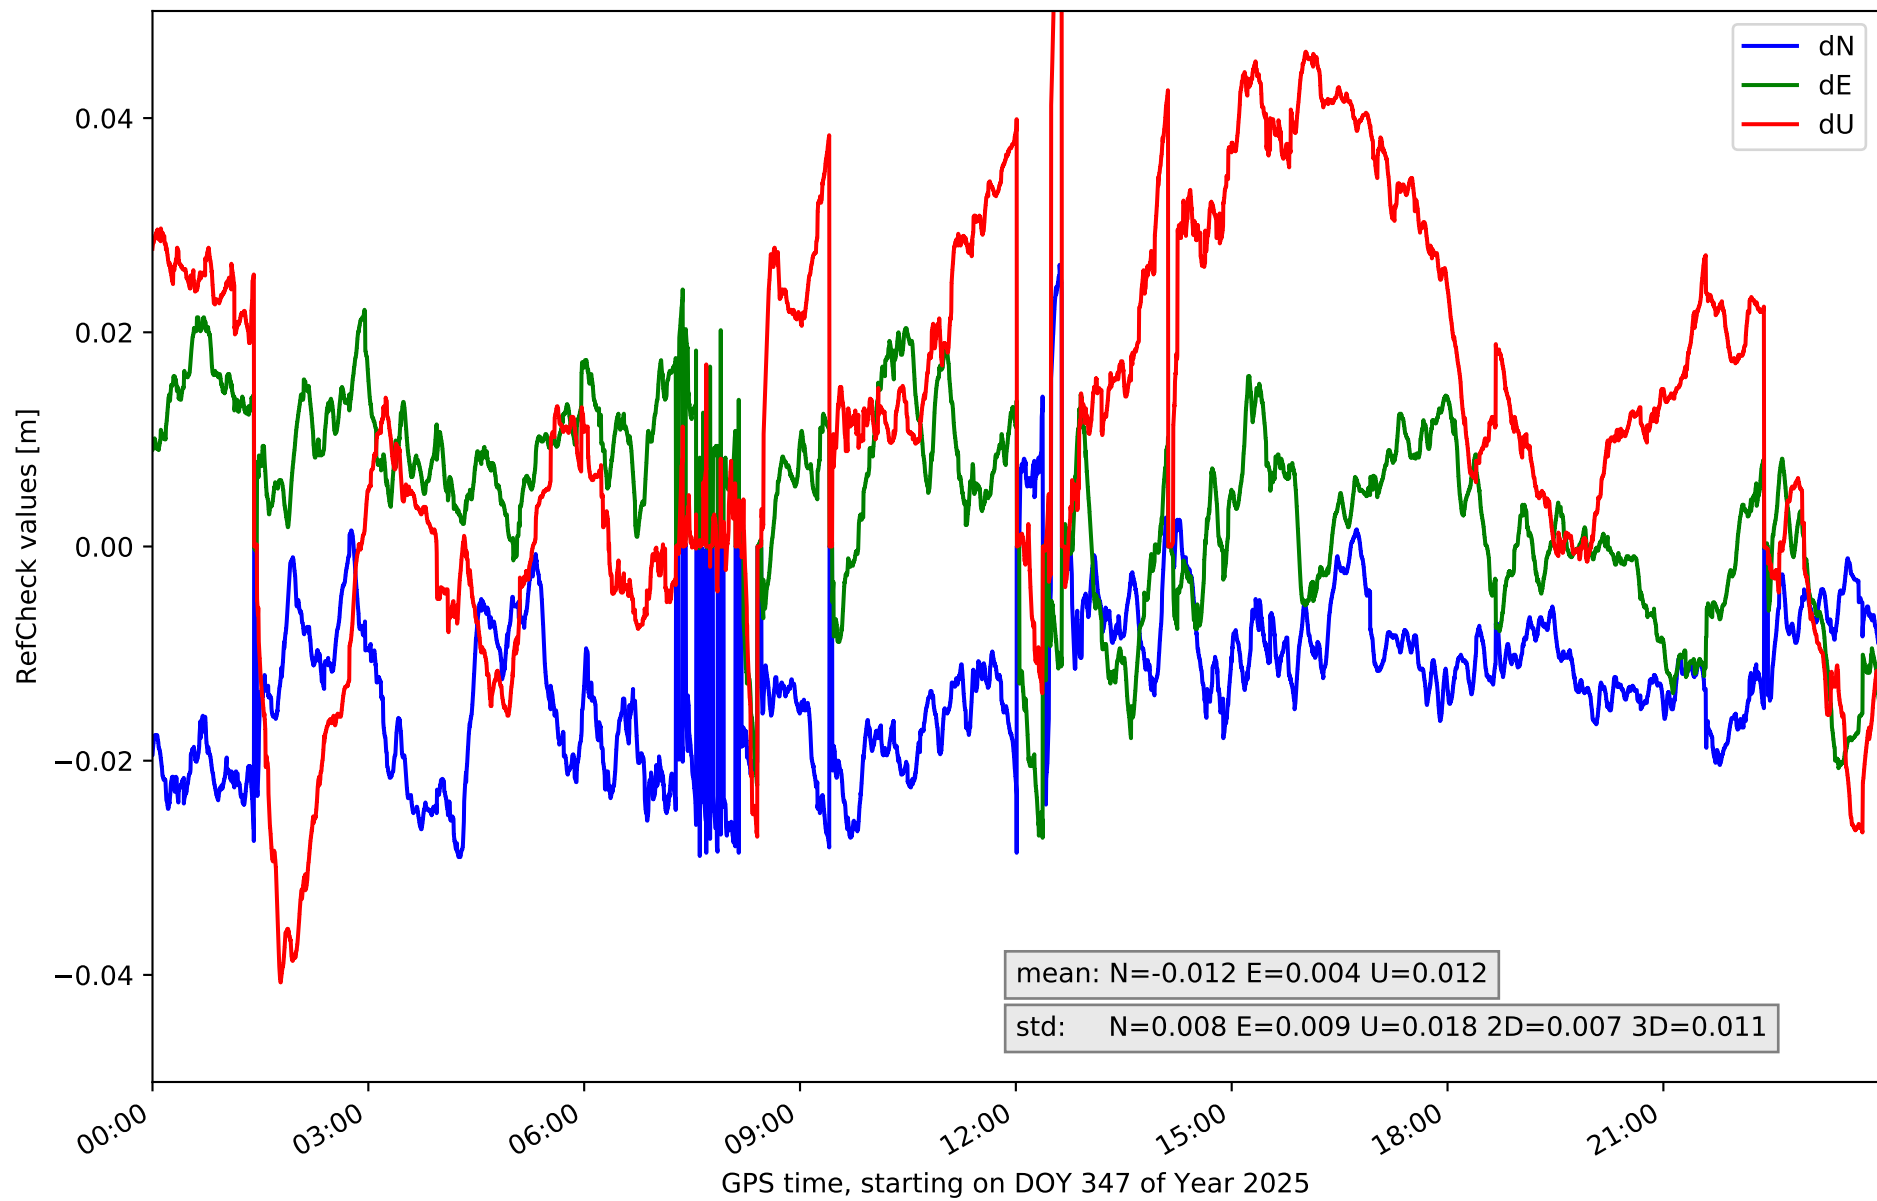


RefCheck for station LP03 in network N32T

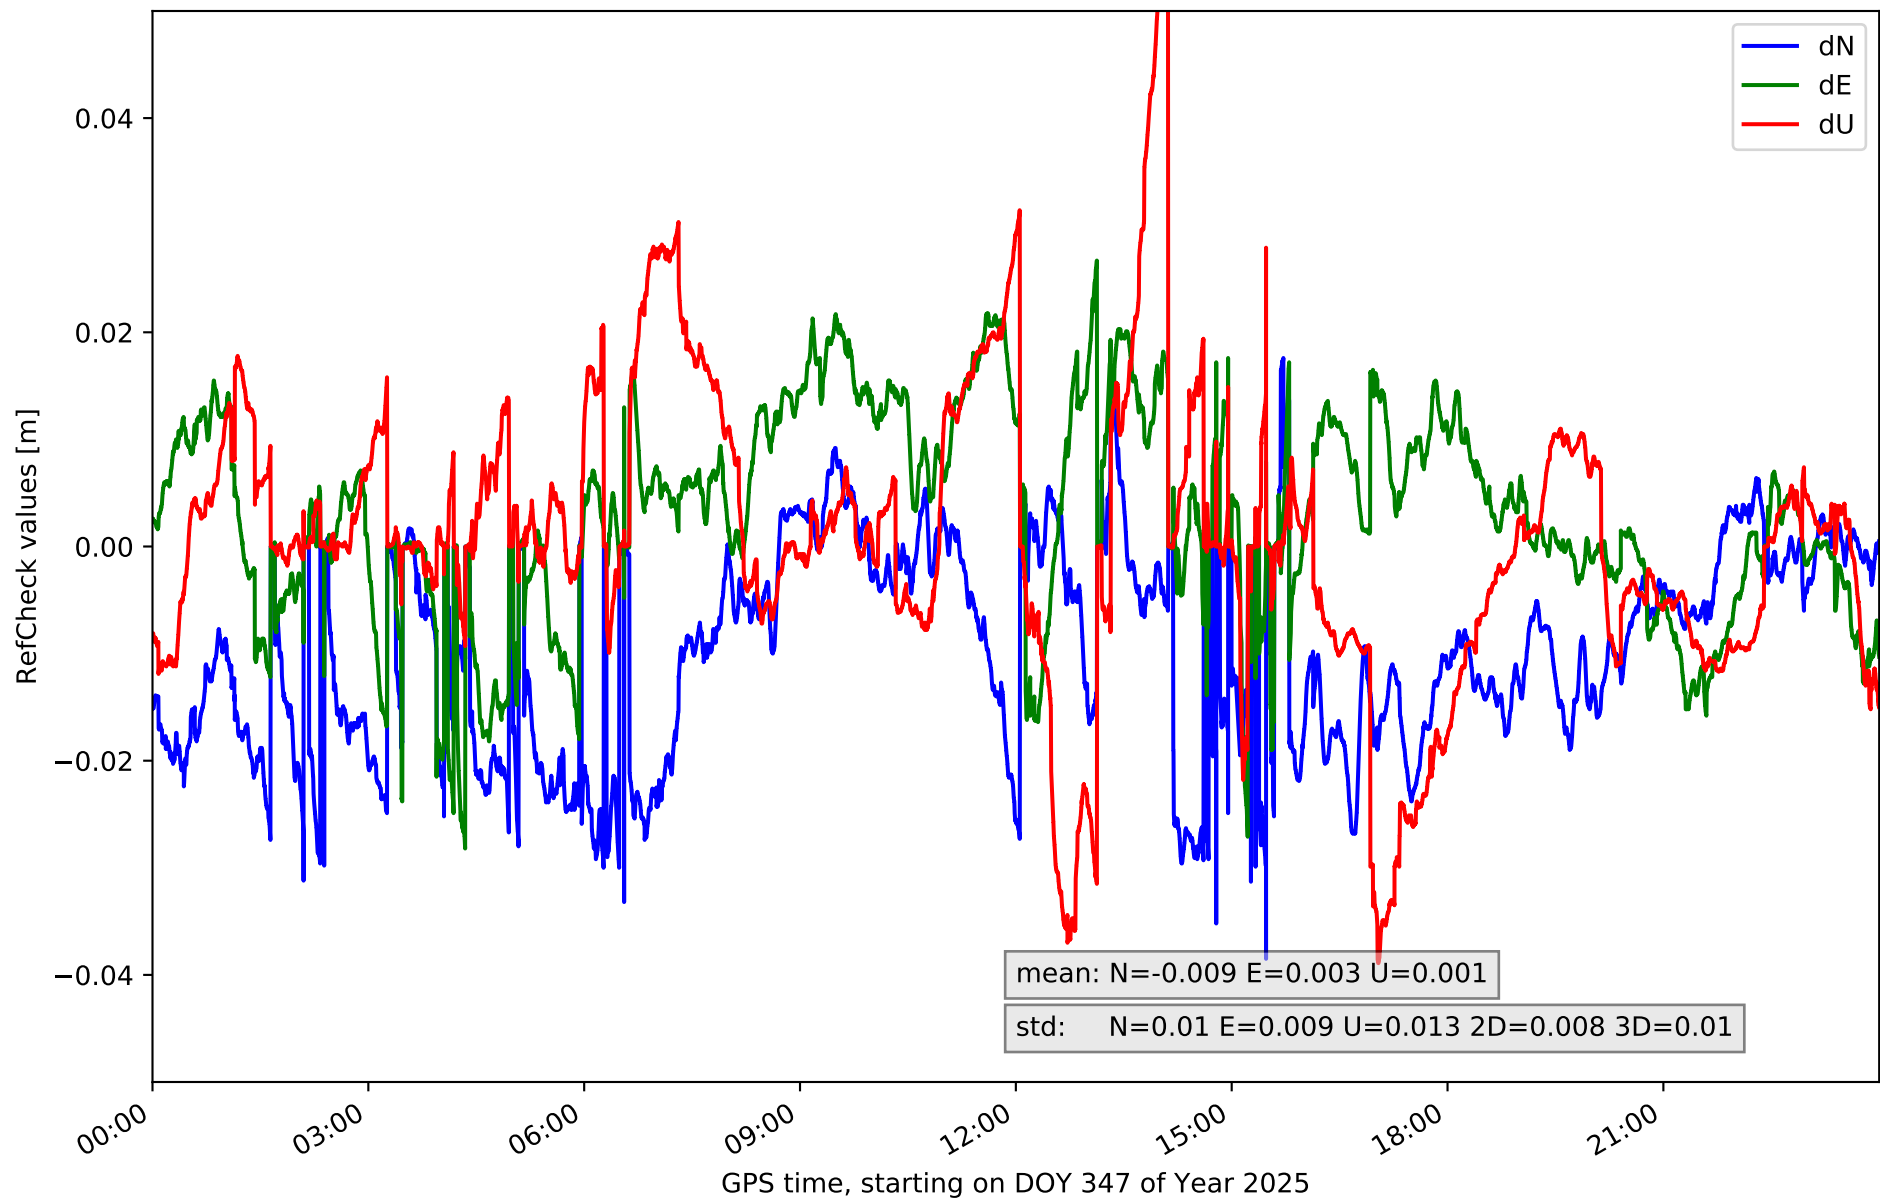


RefCheck for station LPAL in network N32T

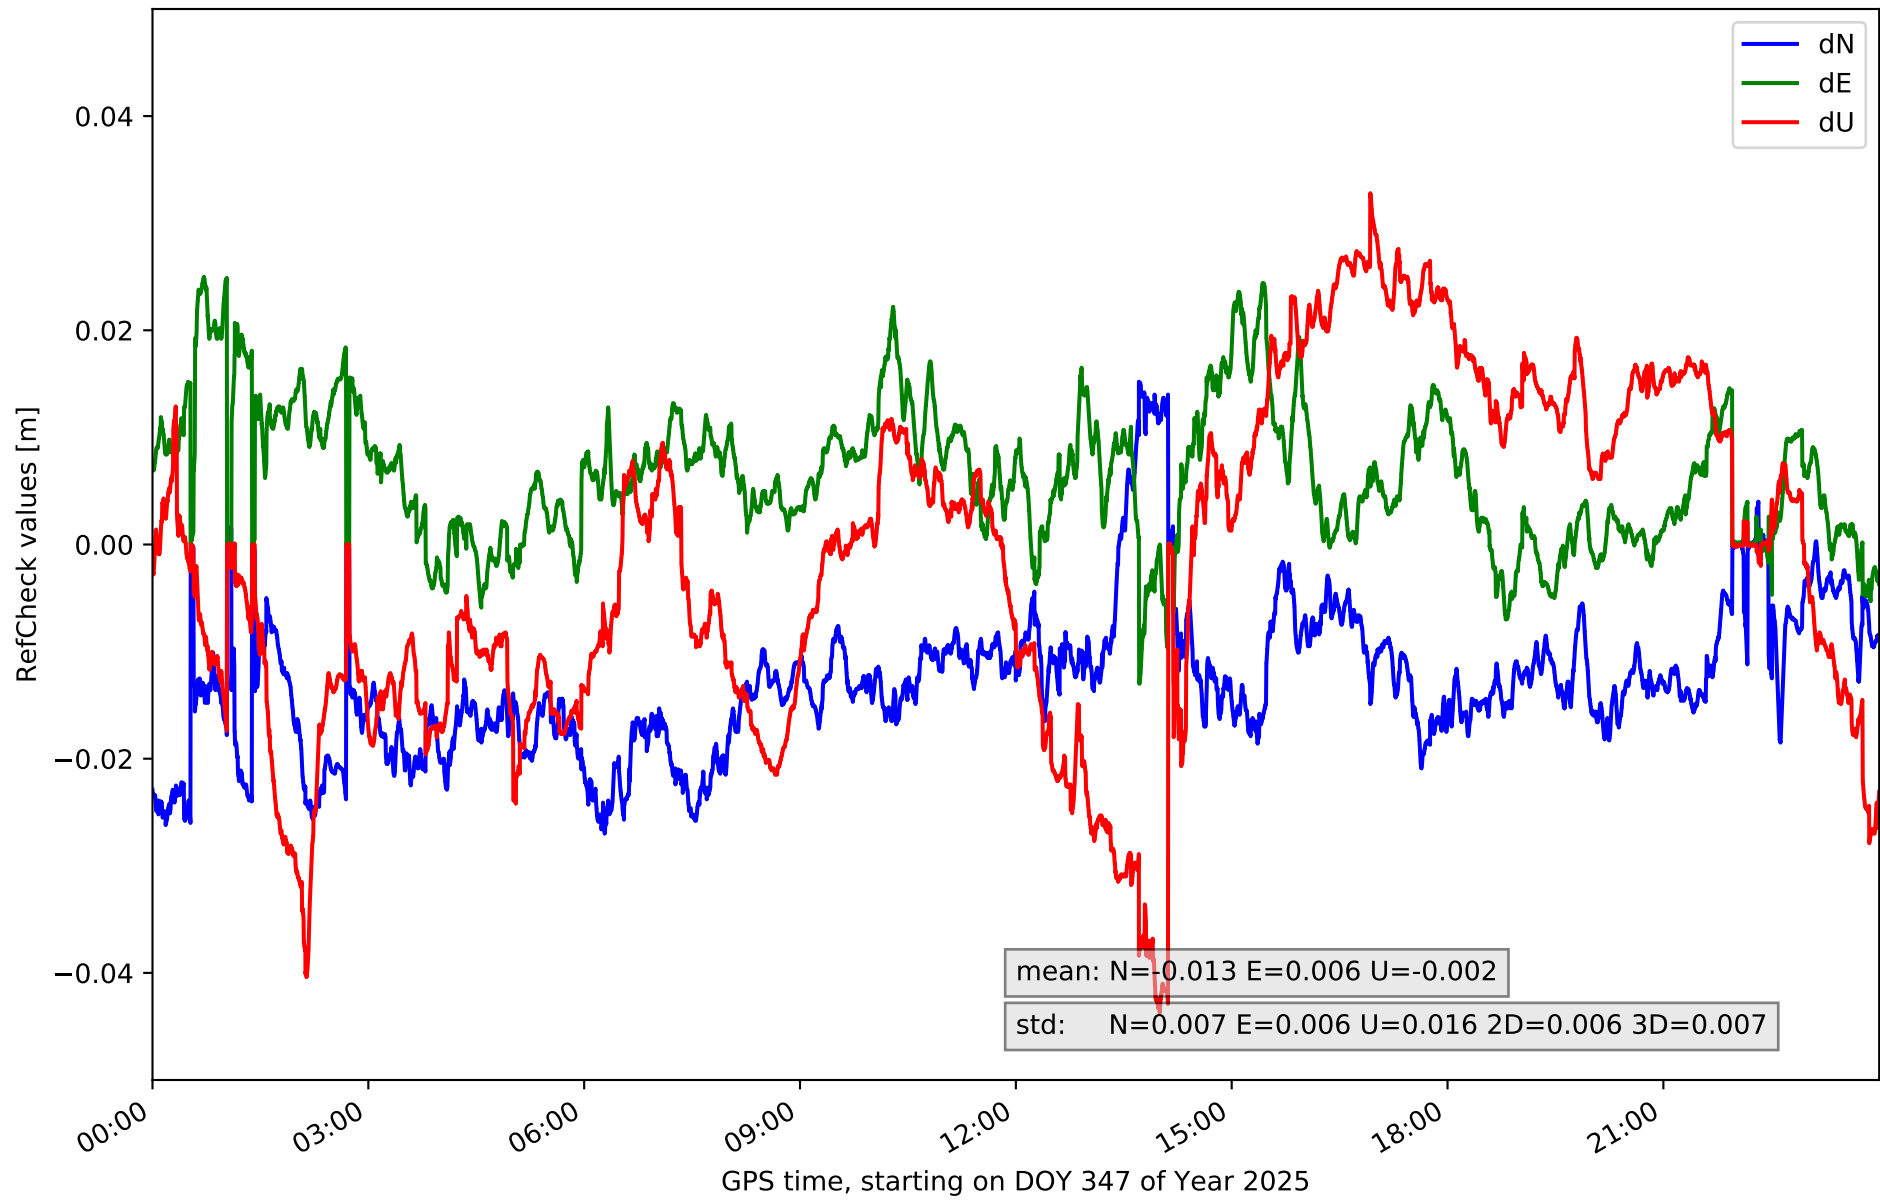


RefCheck for station LRES in network N32T

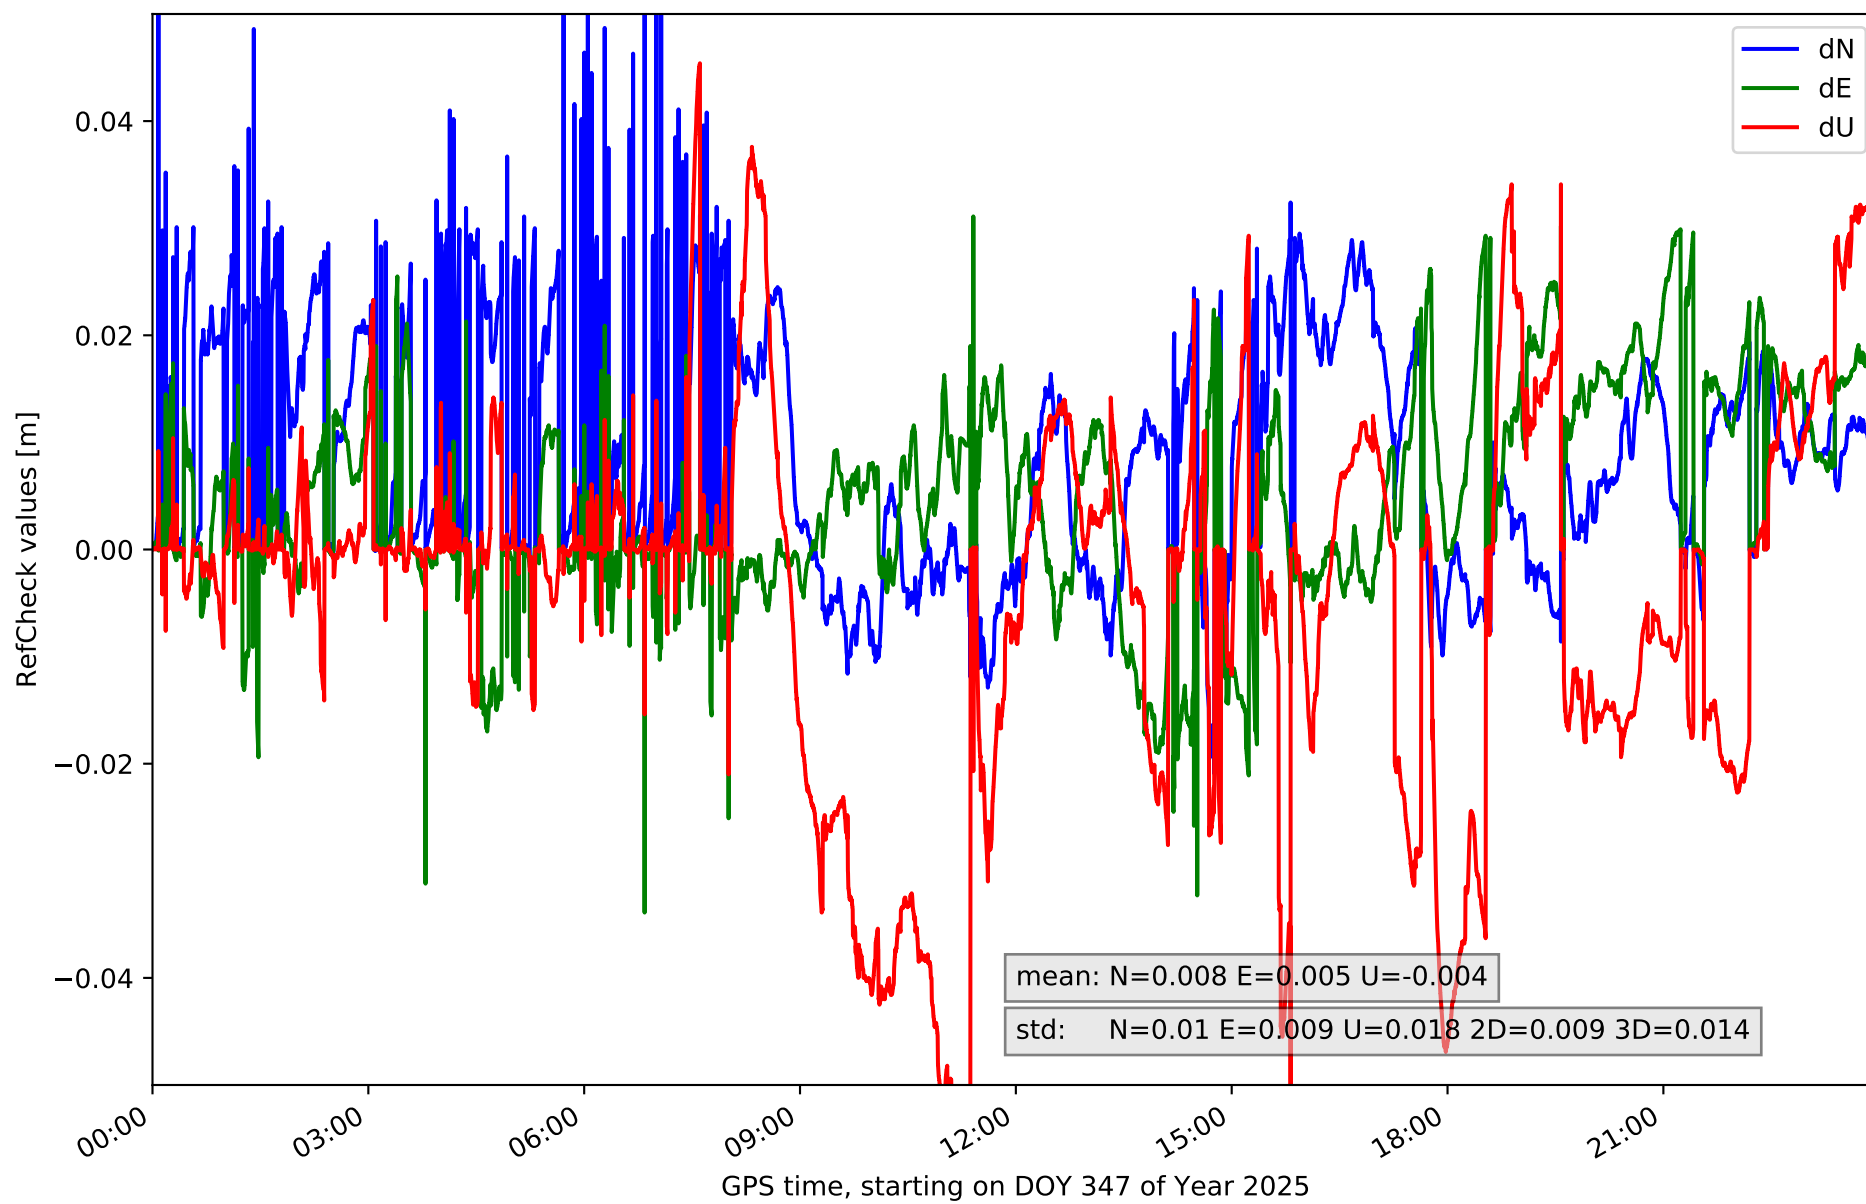


RefCheck for station TN01 in network N32T

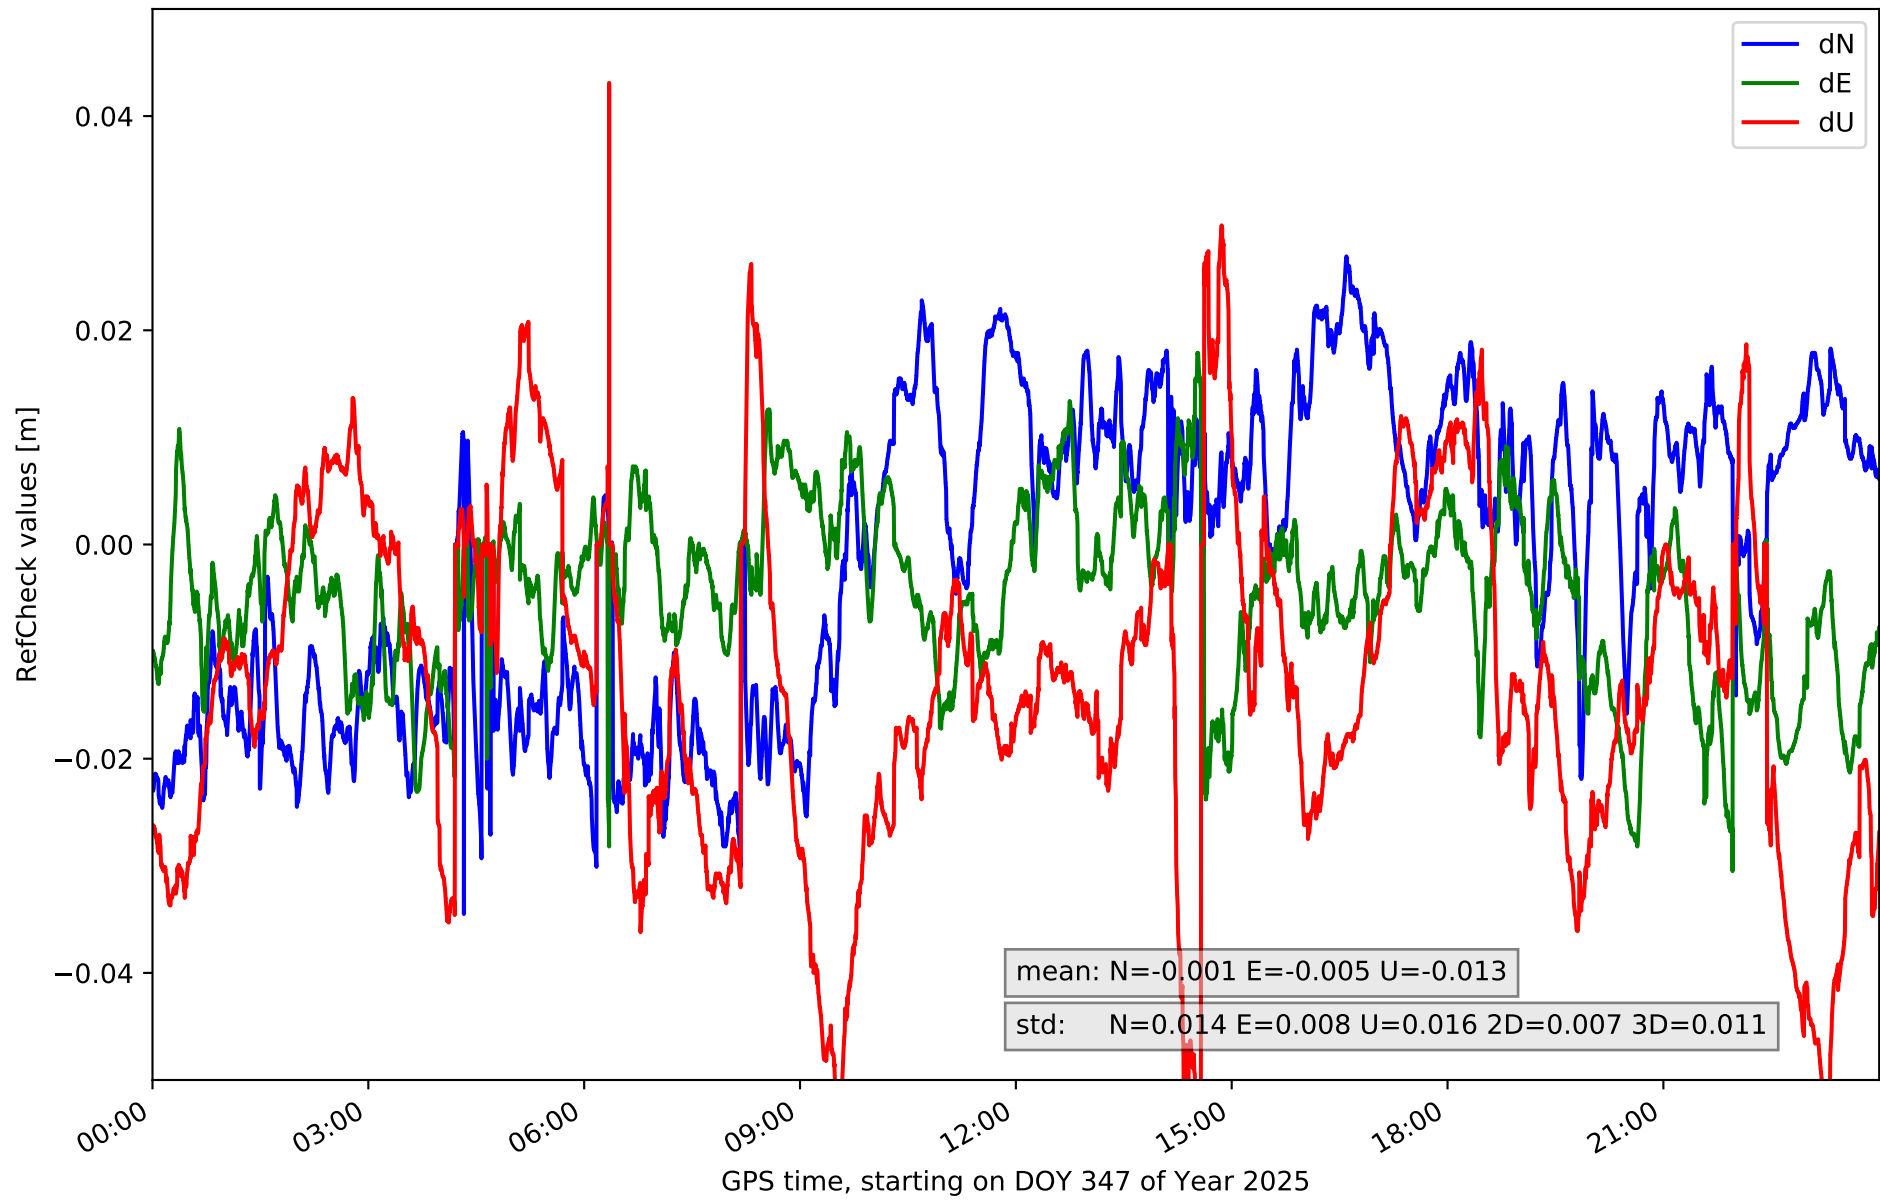


RefCheck for station TN02 in network N32T

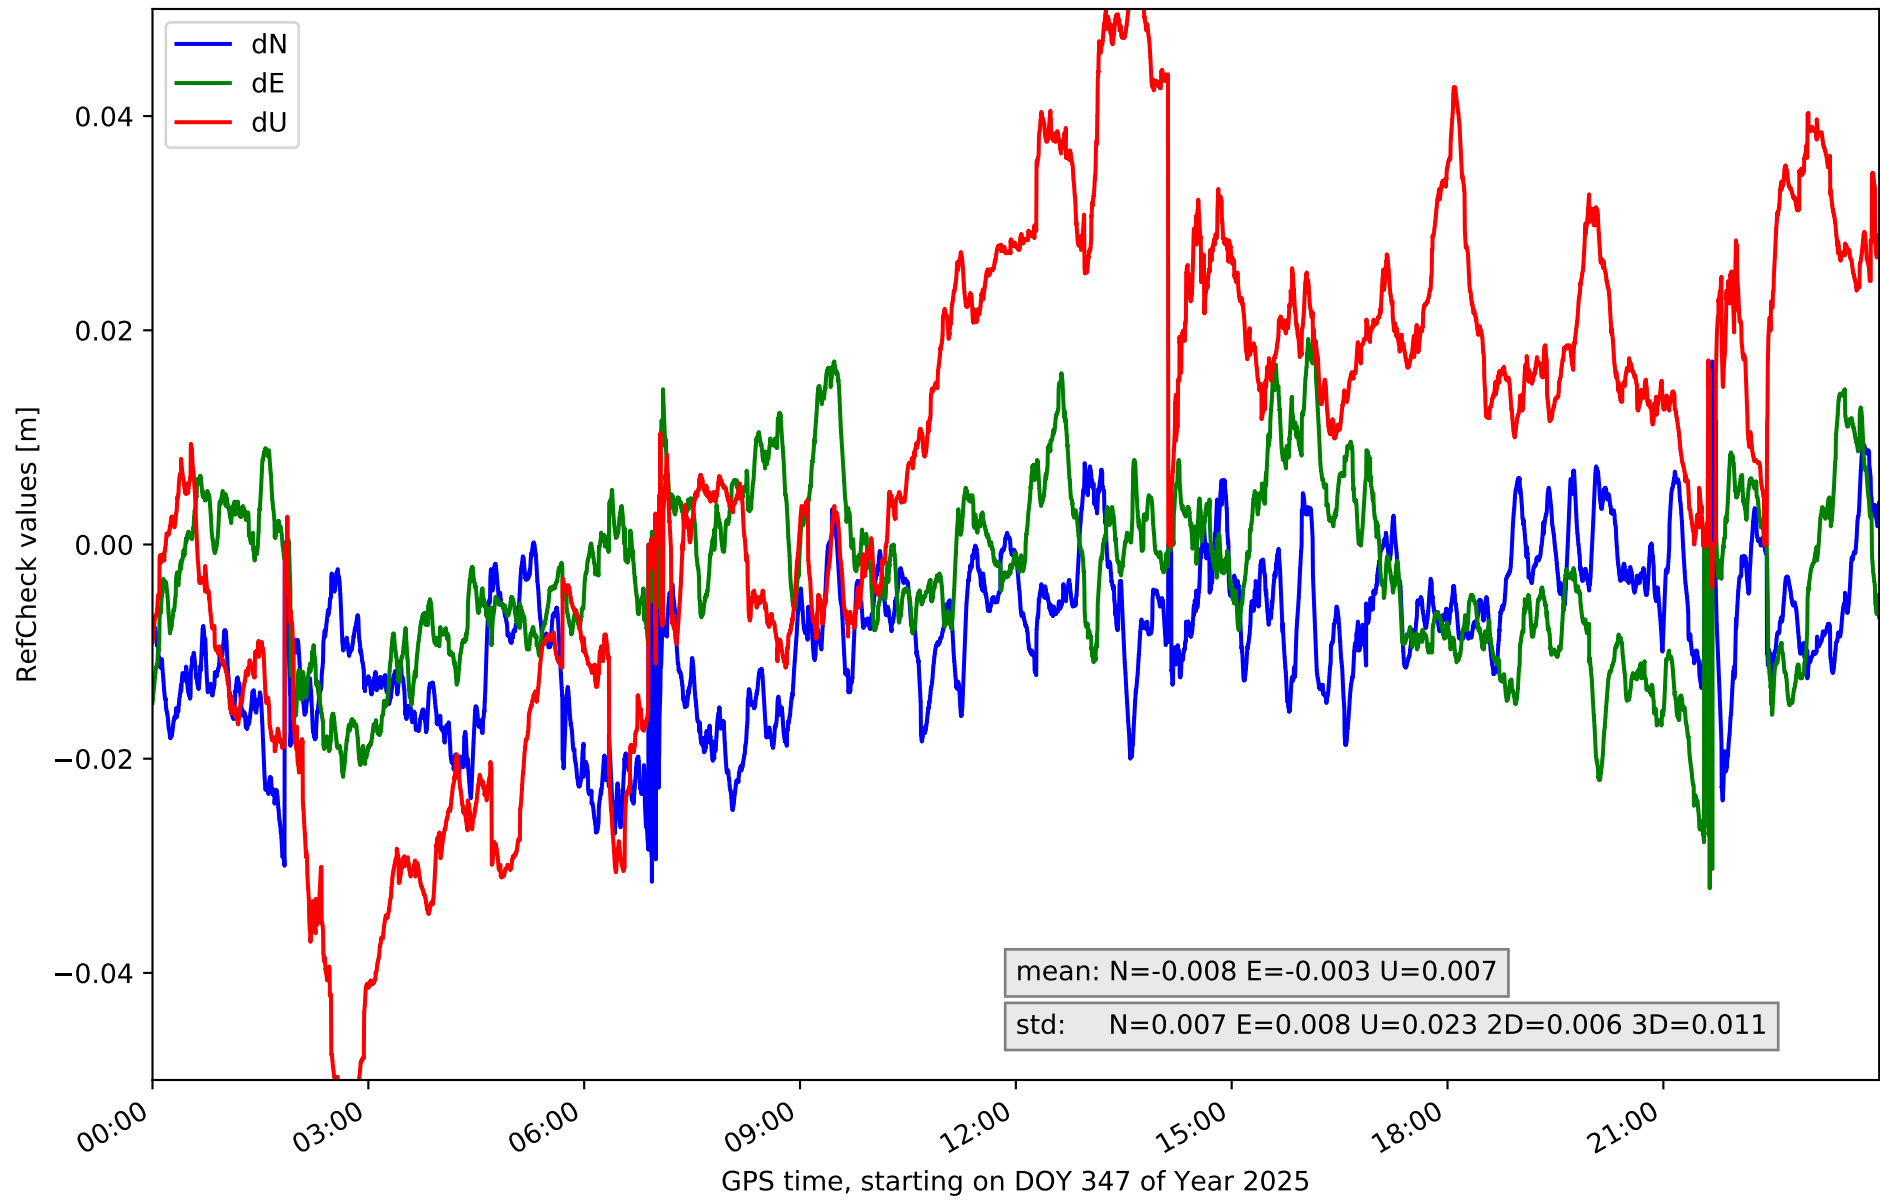


RefCheck for station TN03 in network N32T

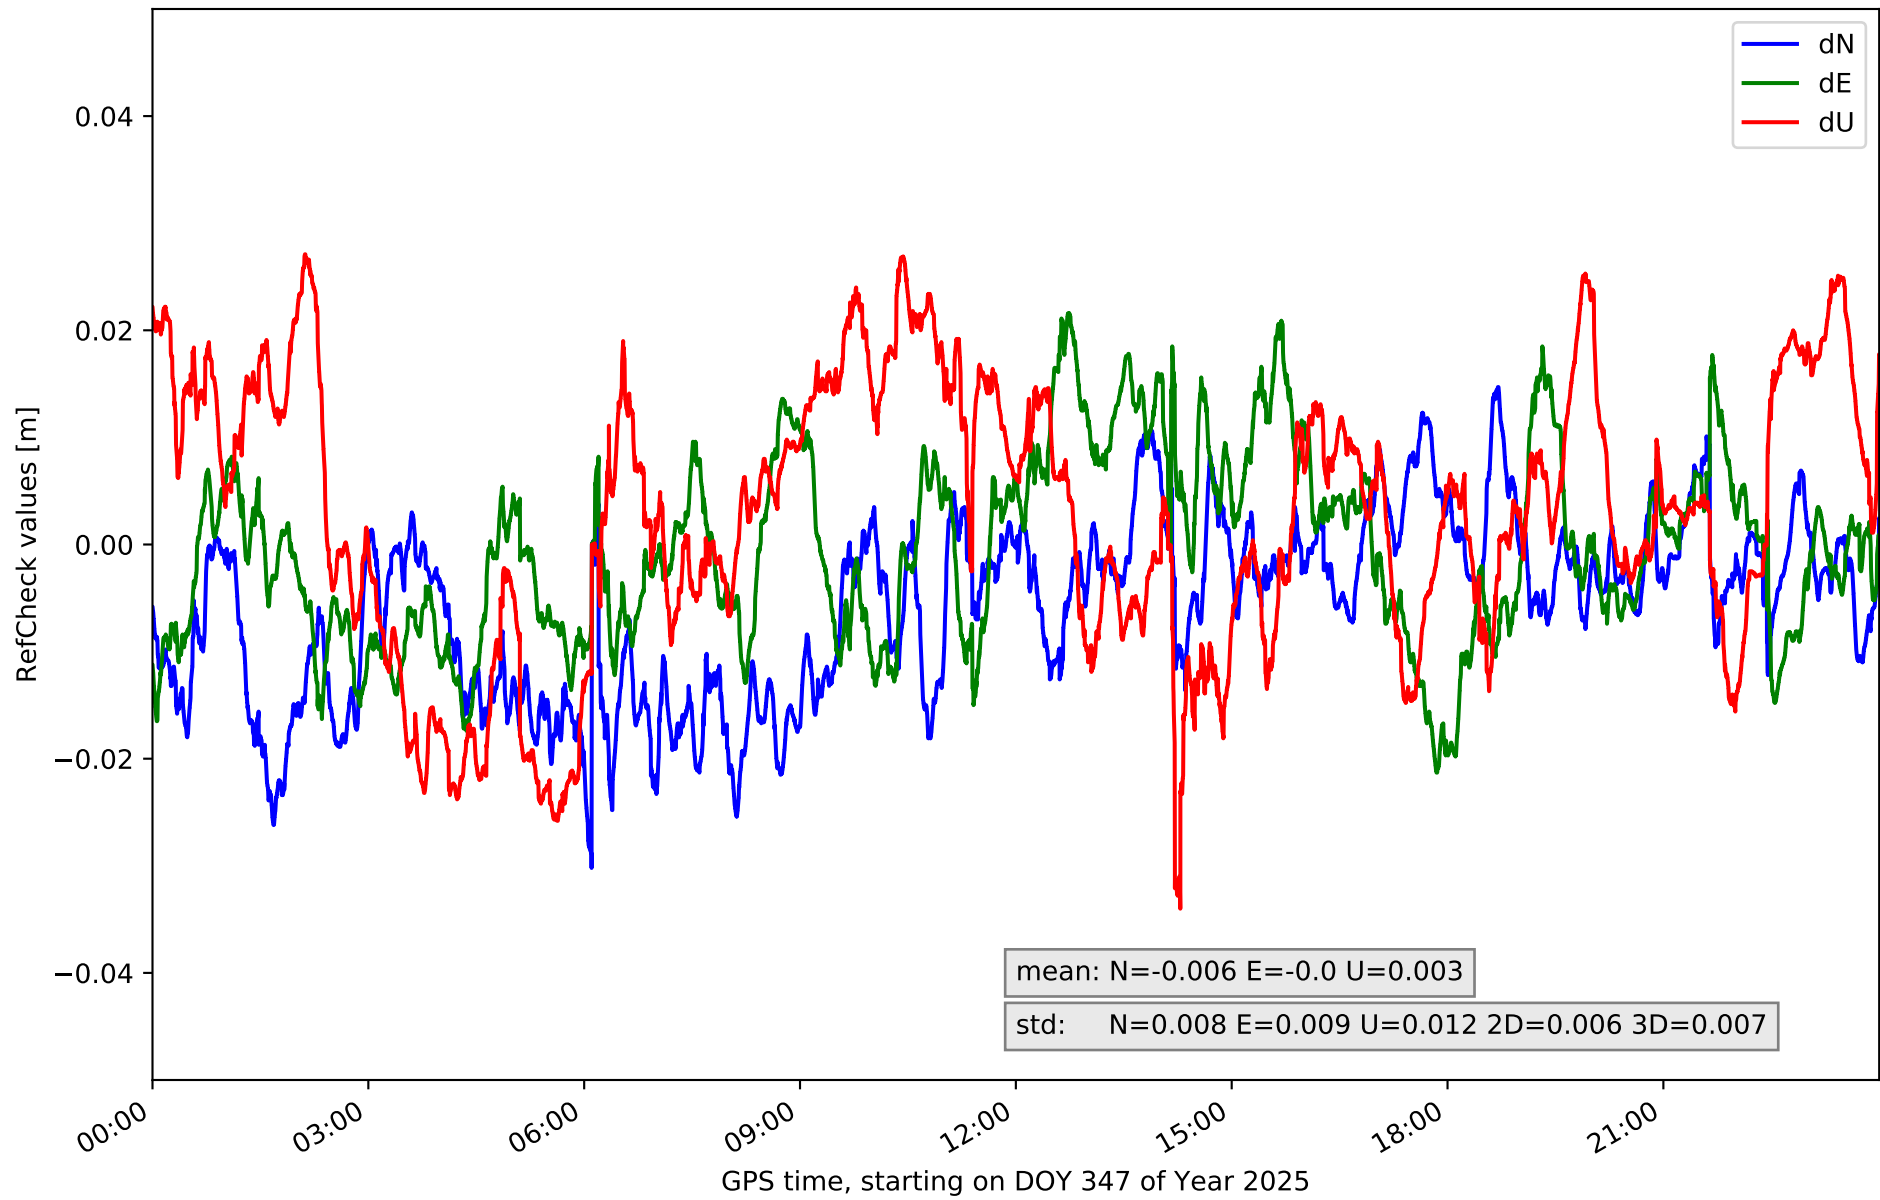


RefCheck for station TN06 in network N32T

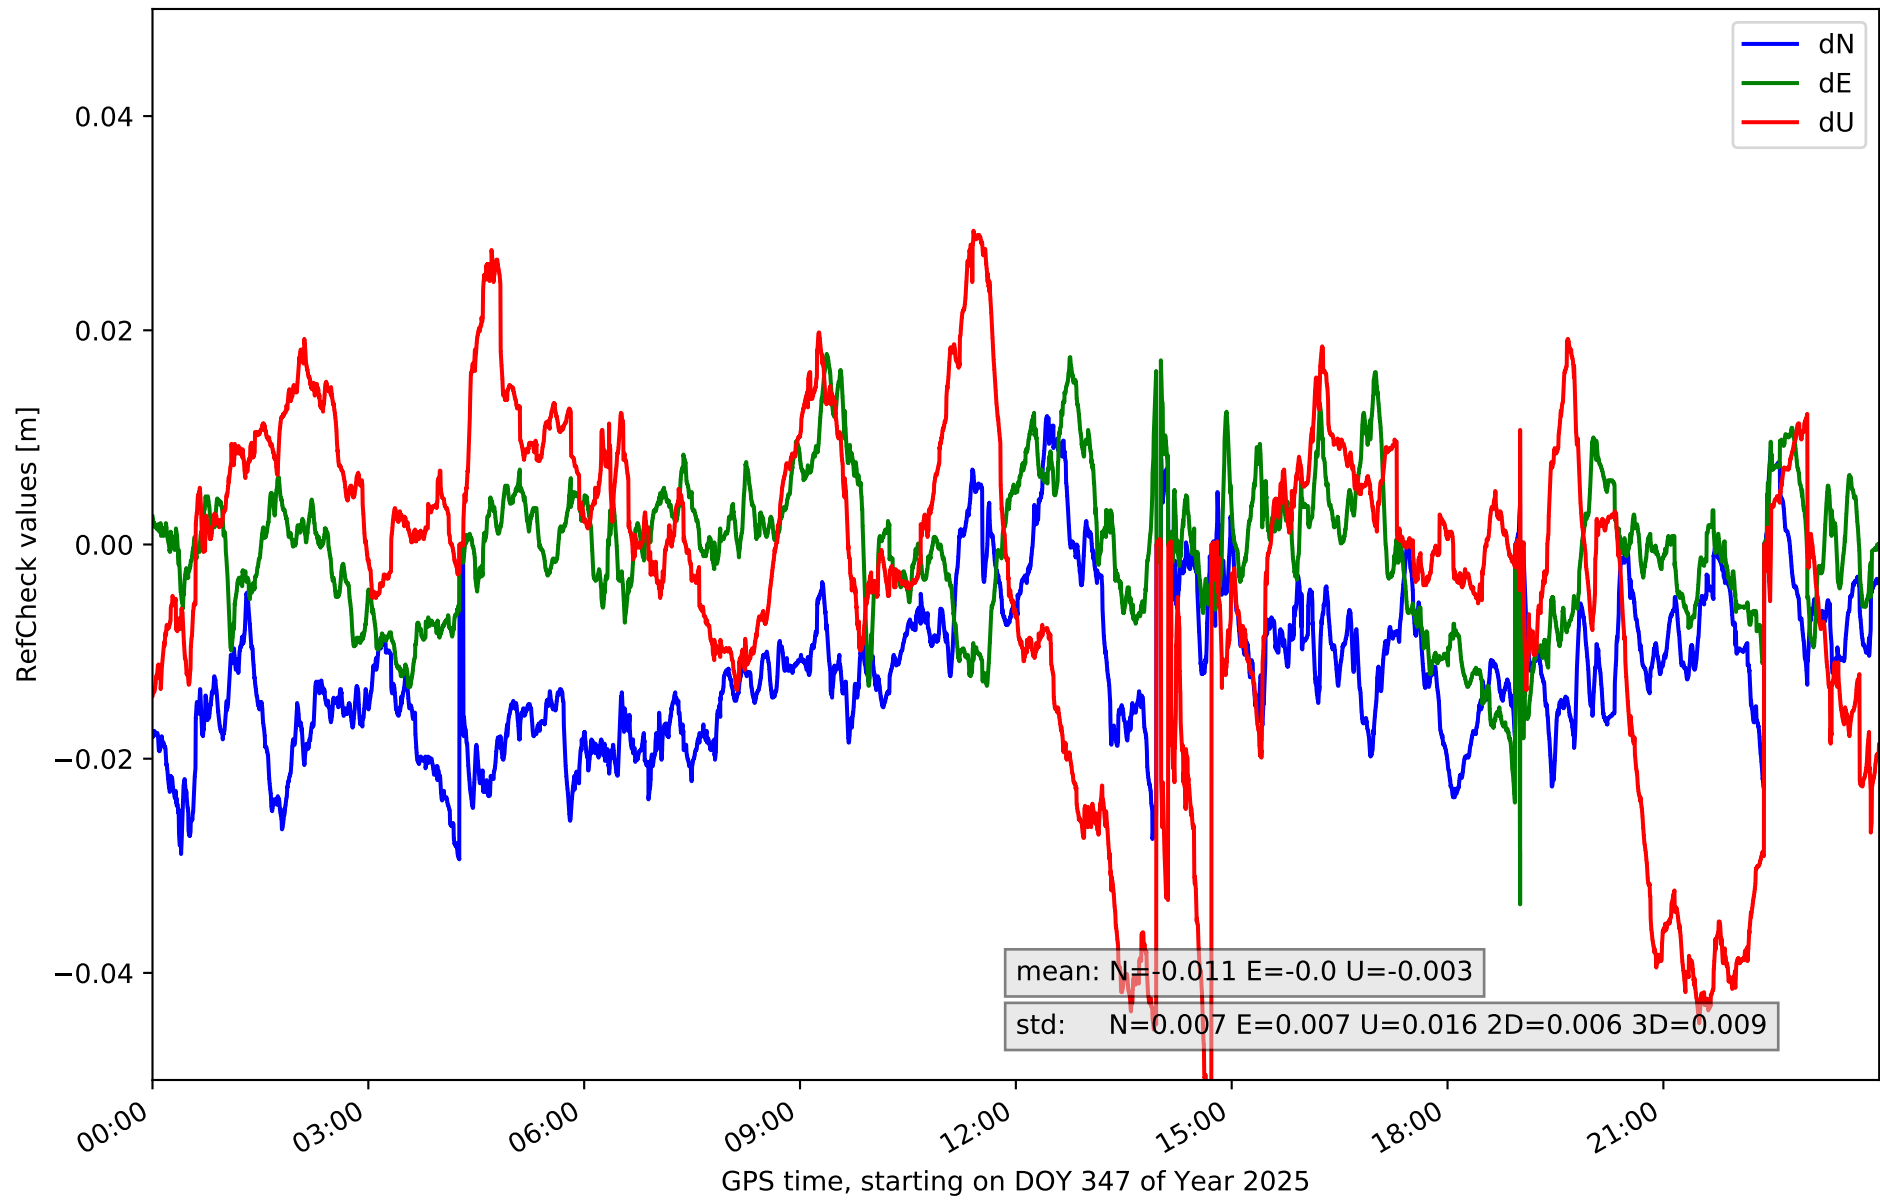

RefCheck for station TN09 in network N32T

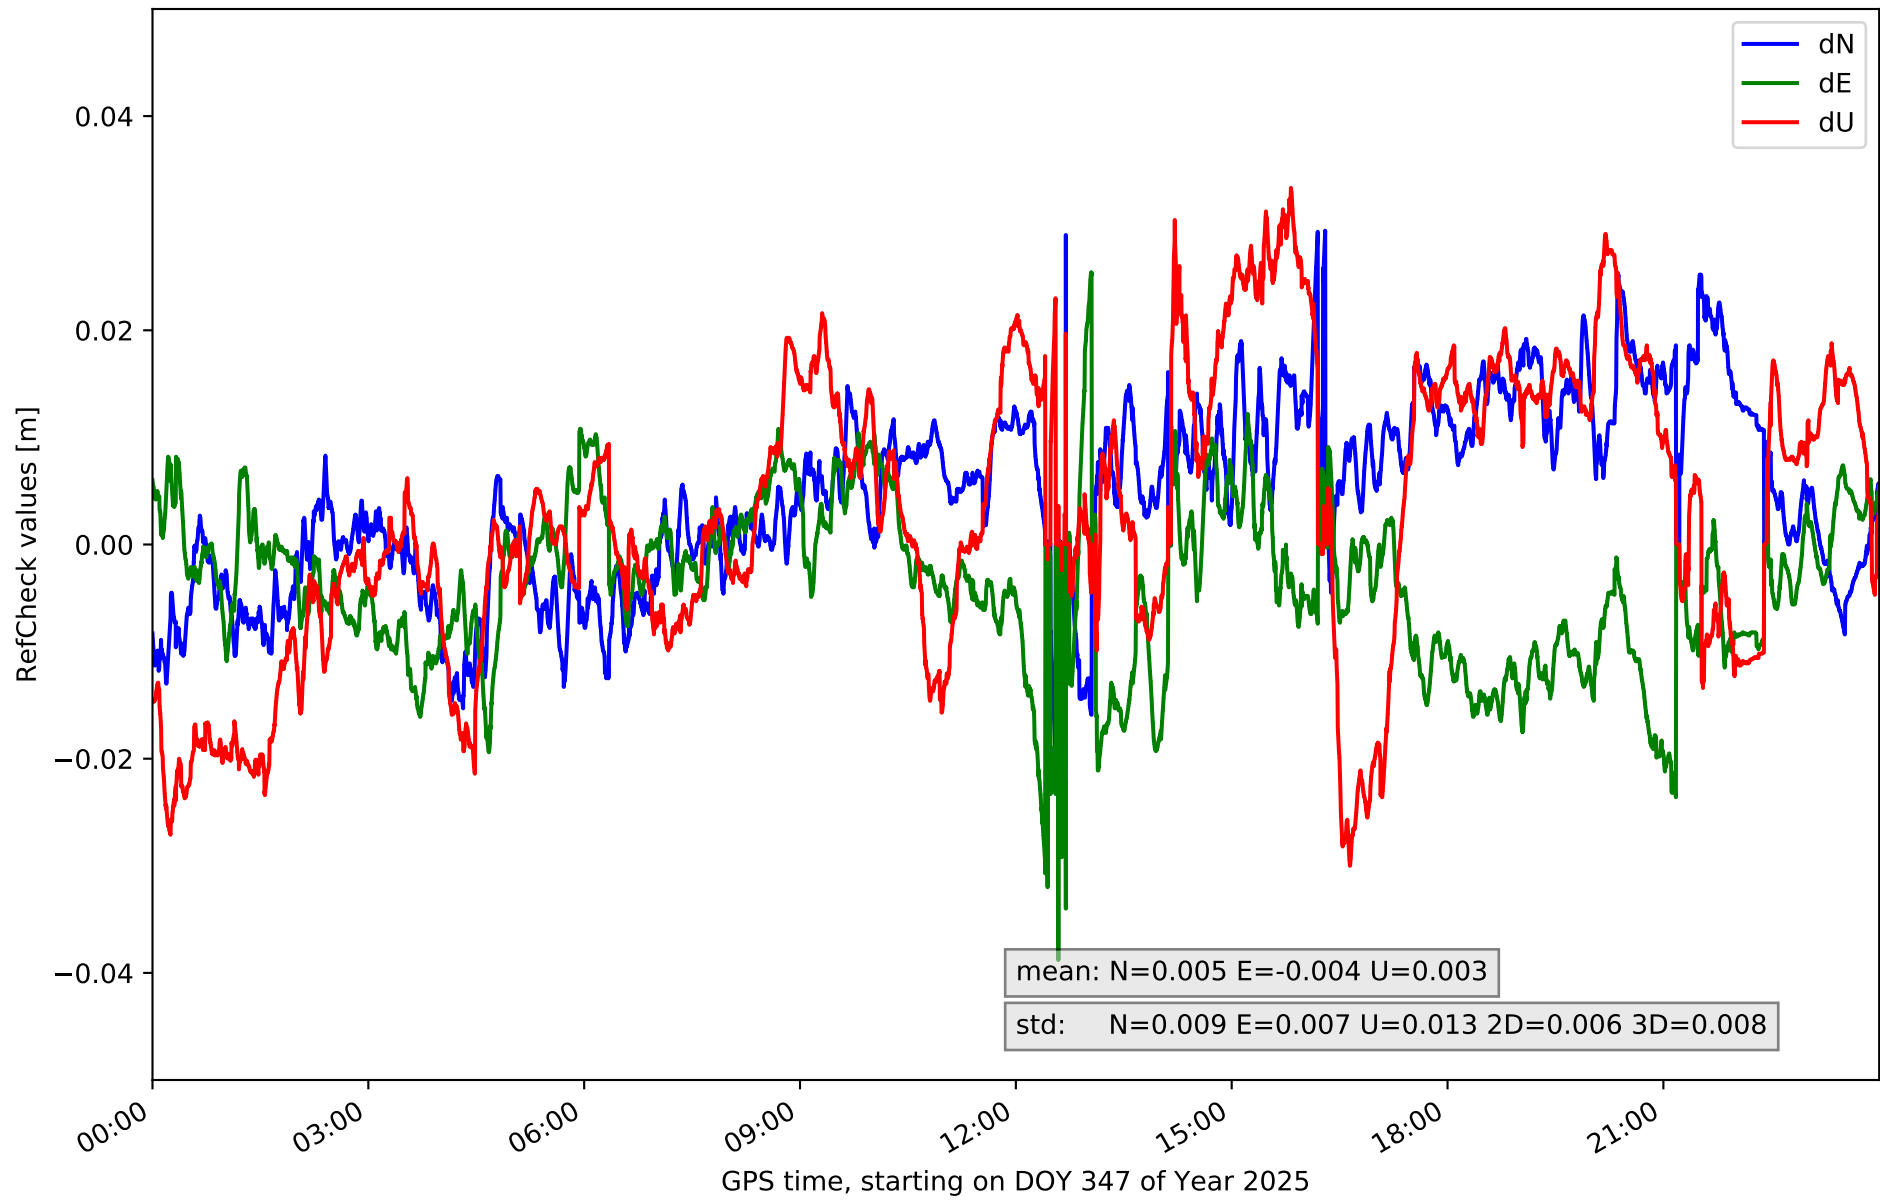

RefCheck for station TE11 in network N32T

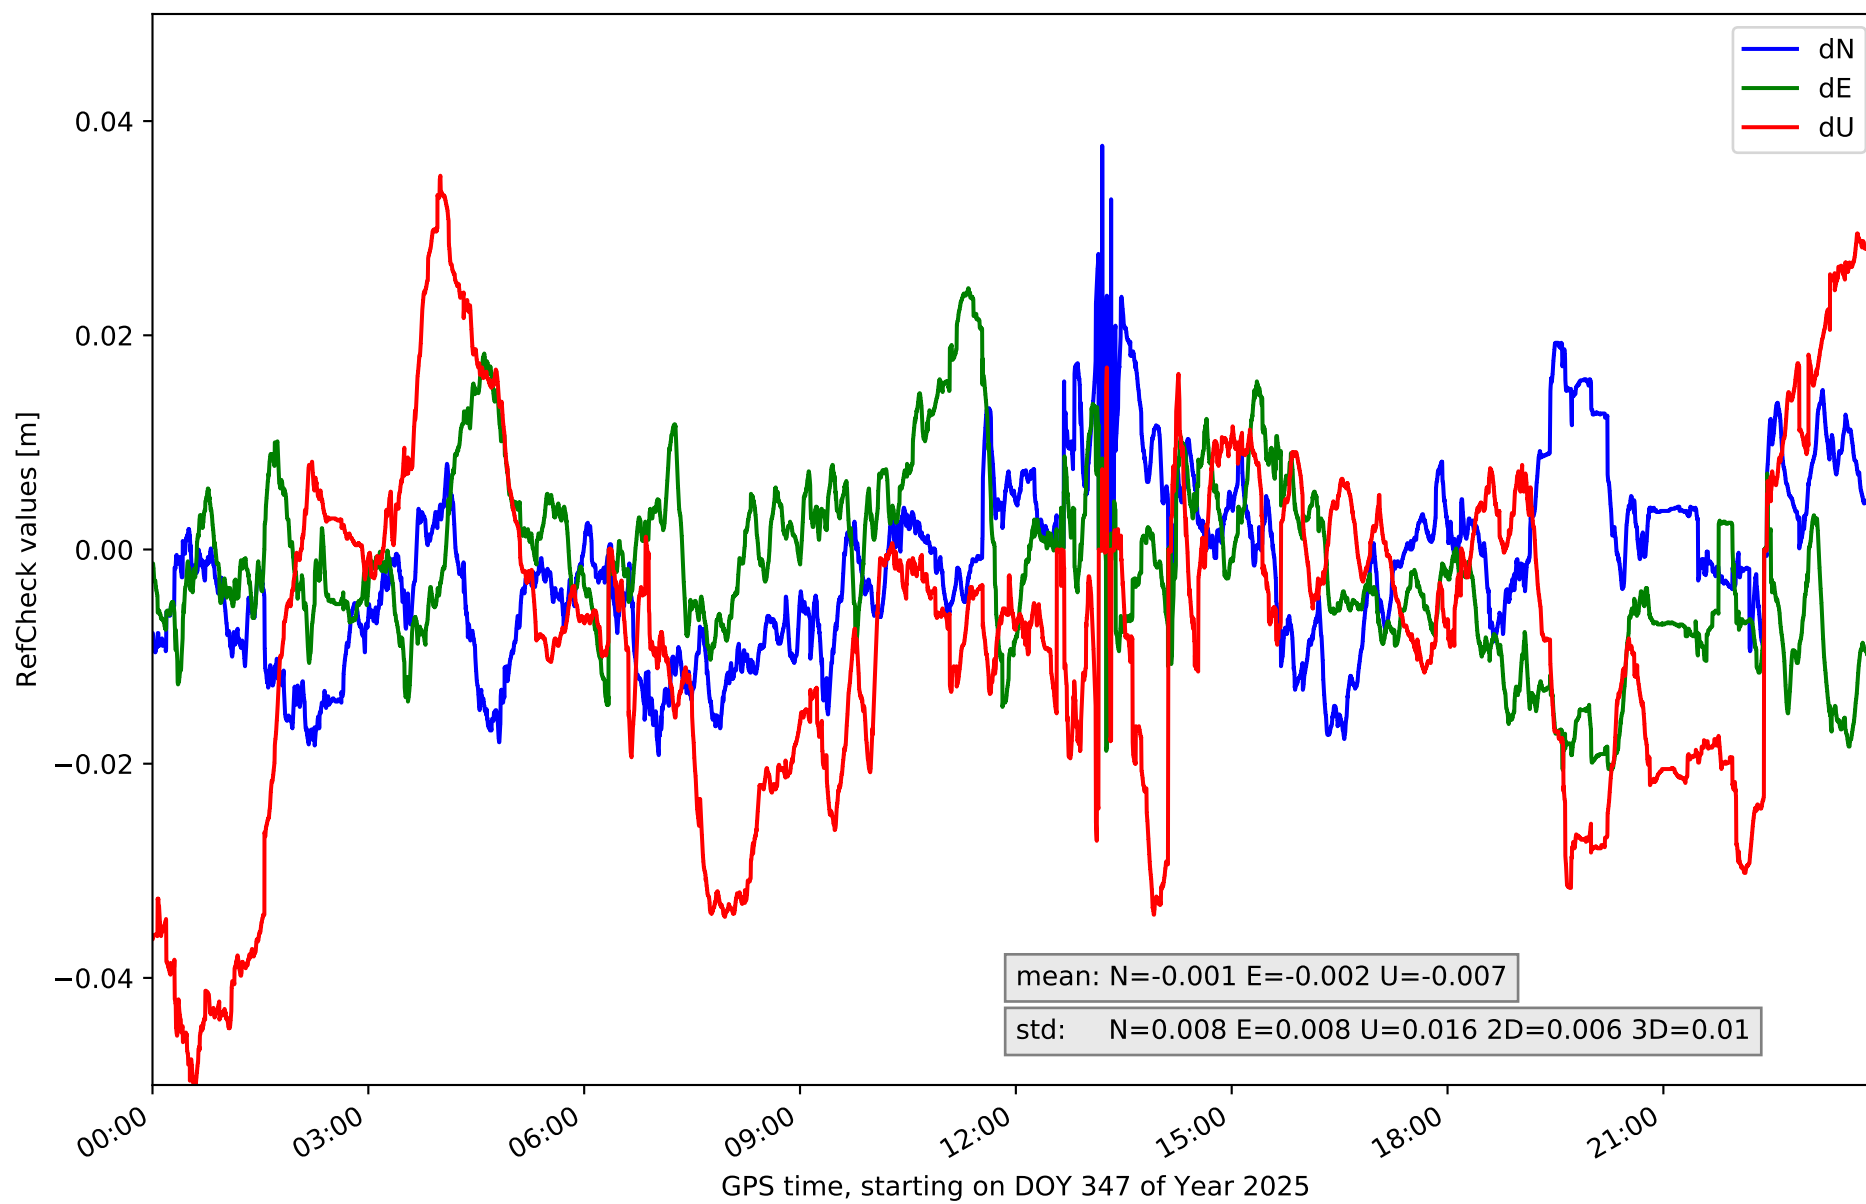

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.022	0.03	0.007	-0.007	0.04	0.007	-0.04	0.03	0.014	0.007	0.008	31996	73.2	19102	43.7
EH02	-0.021	0.026	0.008	-0.024	0.031	0.009	-0.03	0.057	0.018	0.007	0.012	37270	85.3	36066	82.6
GOM1	-0.05	0.012	0.008	-0.04	0.012	0.007	-0.06	0.038	0.015	0.007	0.009	37159	85.1	27508	63.0
GOME	-0.031	0.014	0.007	-0.03	0.025	0.007	-0.022	0.045	0.011	0.006	0.008	26925	61.6	14840	34.0
IZAN	-0.029	0.001	0.006	-0.033	0.006	0.001	-0.025	0.0	0.005	0.006	0.008	2478	5.7	2478	5.7
LP01	-0.029	0.026	0.008	-0.027	0.024	0.009	-0.041	0.061	0.018	0.007	0.011	35378	81.0	30670	70.2
LP03	-0.038	0.018	0.01	-0.028	0.027	0.009	-0.039	0.055	0.013	0.008	0.01	31408	71.9	18098	41.4
LPAL	-0.027	0.015	0.007	-0.013	0.025	0.006	-0.044	0.033	0.016	0.006	0.007	37499	85.8	27143	62.1
LRES	-0.021	0.071	0.01	-0.034	0.031	0.009	-0.061	0.045	0.018	0.009	0.014	27205	62.3	25762	59.0
TN01	-0.035	0.027	0.014	-0.03	0.018	0.008	-0.061	0.043	0.016	0.007	0.011	34282	78.5	27287	62.5
TN02	-0.032	0.017	0.007	-0.032	0.019	0.008	-0.054	0.054	0.023	0.006	0.011	28441	65.1	28912	66.2
TN03	-0.03	0.015	0.008	-0.021	0.022	0.009	-0.034	0.027	0.012	0.006	0.007	25294	57.9	14597	33.4
TN06	-0.029	0.012	0.007	-0.034	0.018	0.007	-0.06	0.029	0.016	0.006	0.009	31975	73.2	19250	44.1
TN09	-0.019	0.029	0.009	-0.039	0.025	0.007	-0.03	0.033	0.013	0.006	0.008	21616	49.5	16978	38.9
TE11	-0.019	0.038	0.008	-0.021	0.024	0.008	-0.051	0.035	0.016	0.006	0.01	20785	47.6	17634	40.4
Mean	-0.029	0.023	0.008	-0.028	0.023	0.007	-0.043	0.039	0.015	0.007	0.01	28647.4	65.6	21755.0	49.8
Min/Max	-0.05	0.071	0.014	-0.04	0.04	0.009	-0.061	0.061	0.023	0.009	0.014	37499	85.8	36066	82.6

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	80.1	86.4	63.2	86.9	75.1
considering satellites with dual-frequency fixed	69.2	74.8	47.1	76.7	68.4
considering all signals separately	70.4	74.6	47.1	77.3	67.2