

summary for network NT32

timeperiod chosen: from 2025-12-25-00:00:00 until 2025-12-25-23:59:58

average update rate (durations larger than 15 seconds considered as observation gap): 1.3 seconds


average fixing percentage with threshold set to 0.3: 93.7 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: LEICA GR50	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

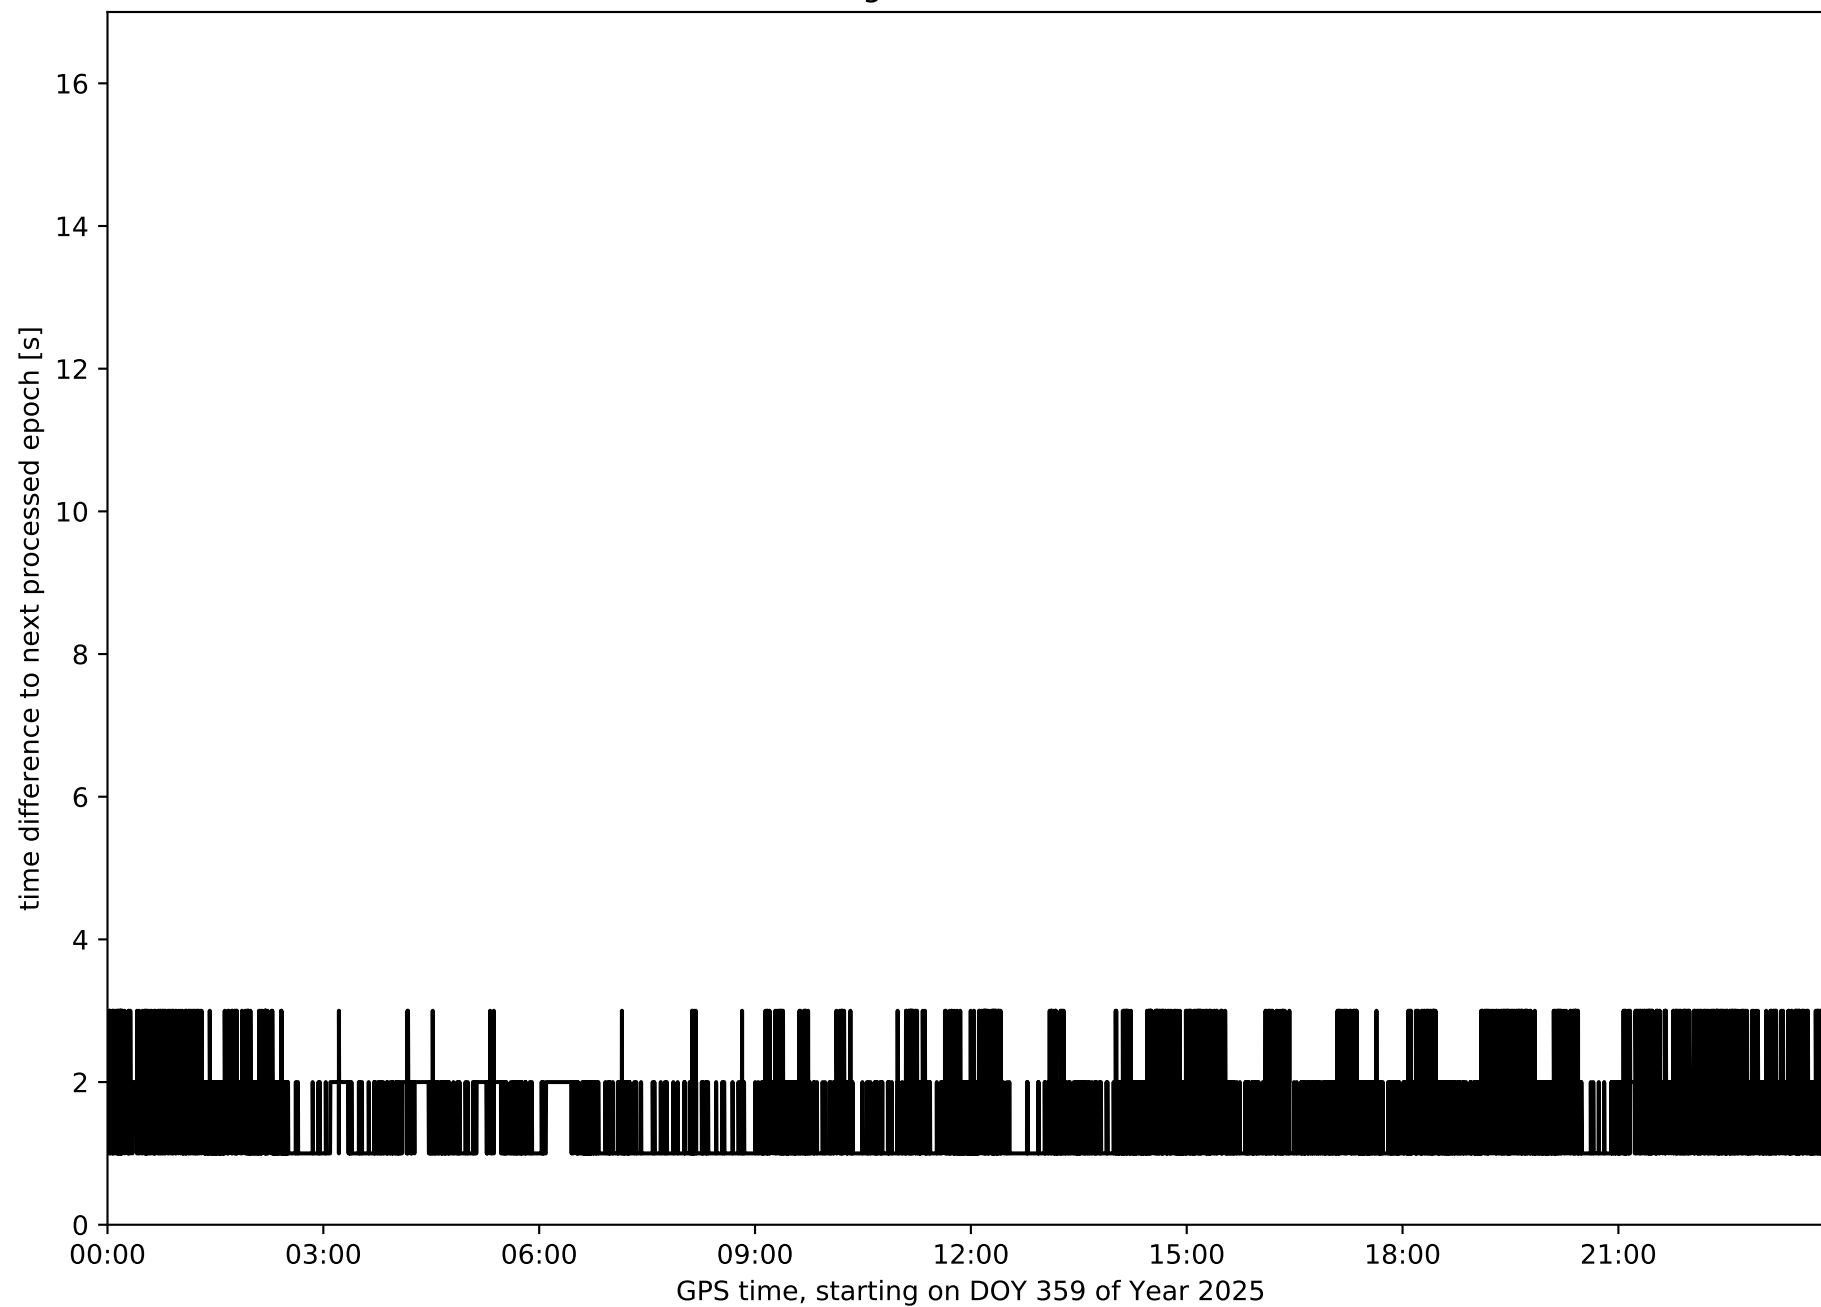


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

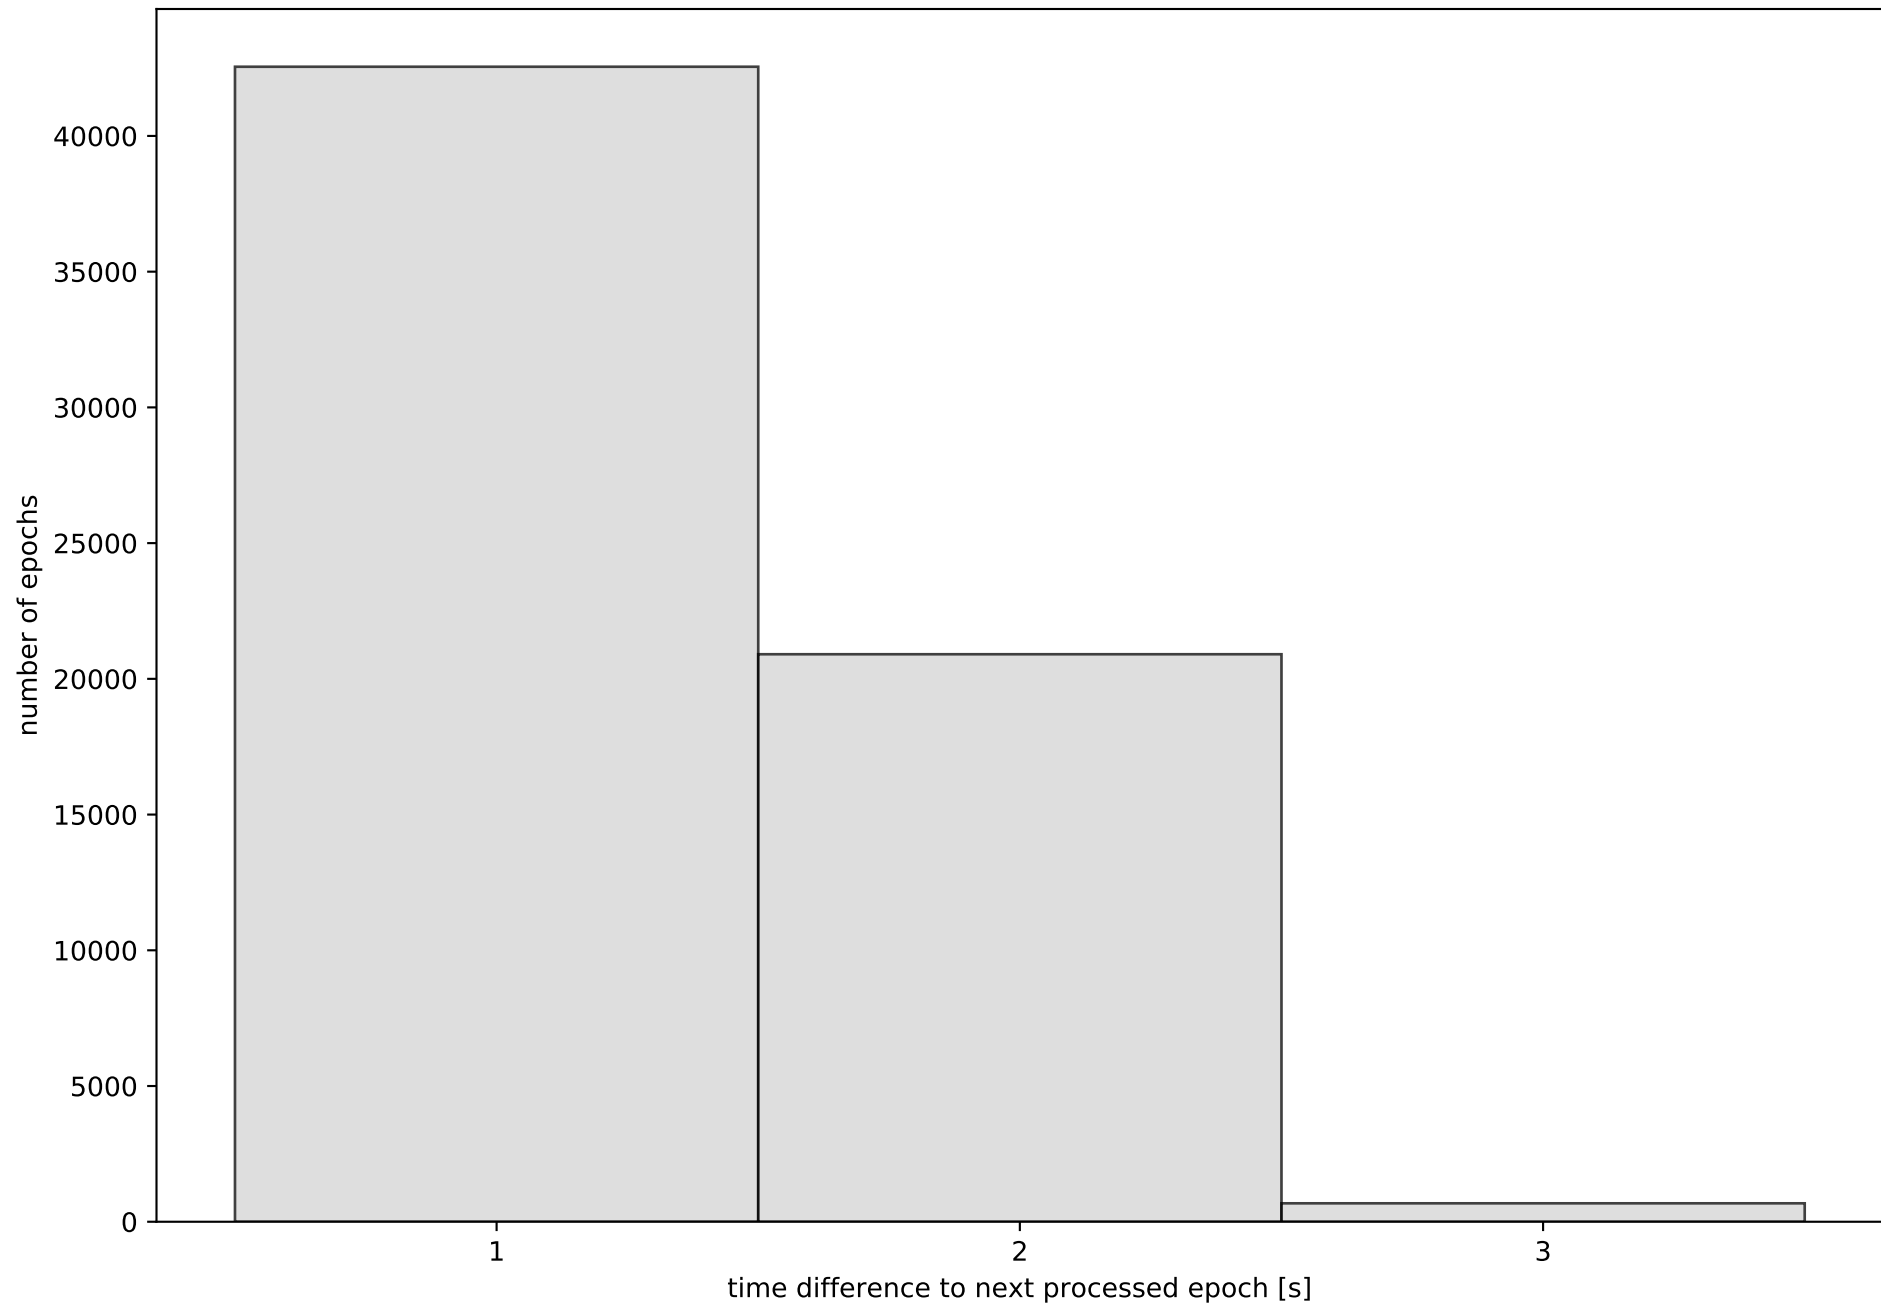


Network NT32 with threshold set to 0.3

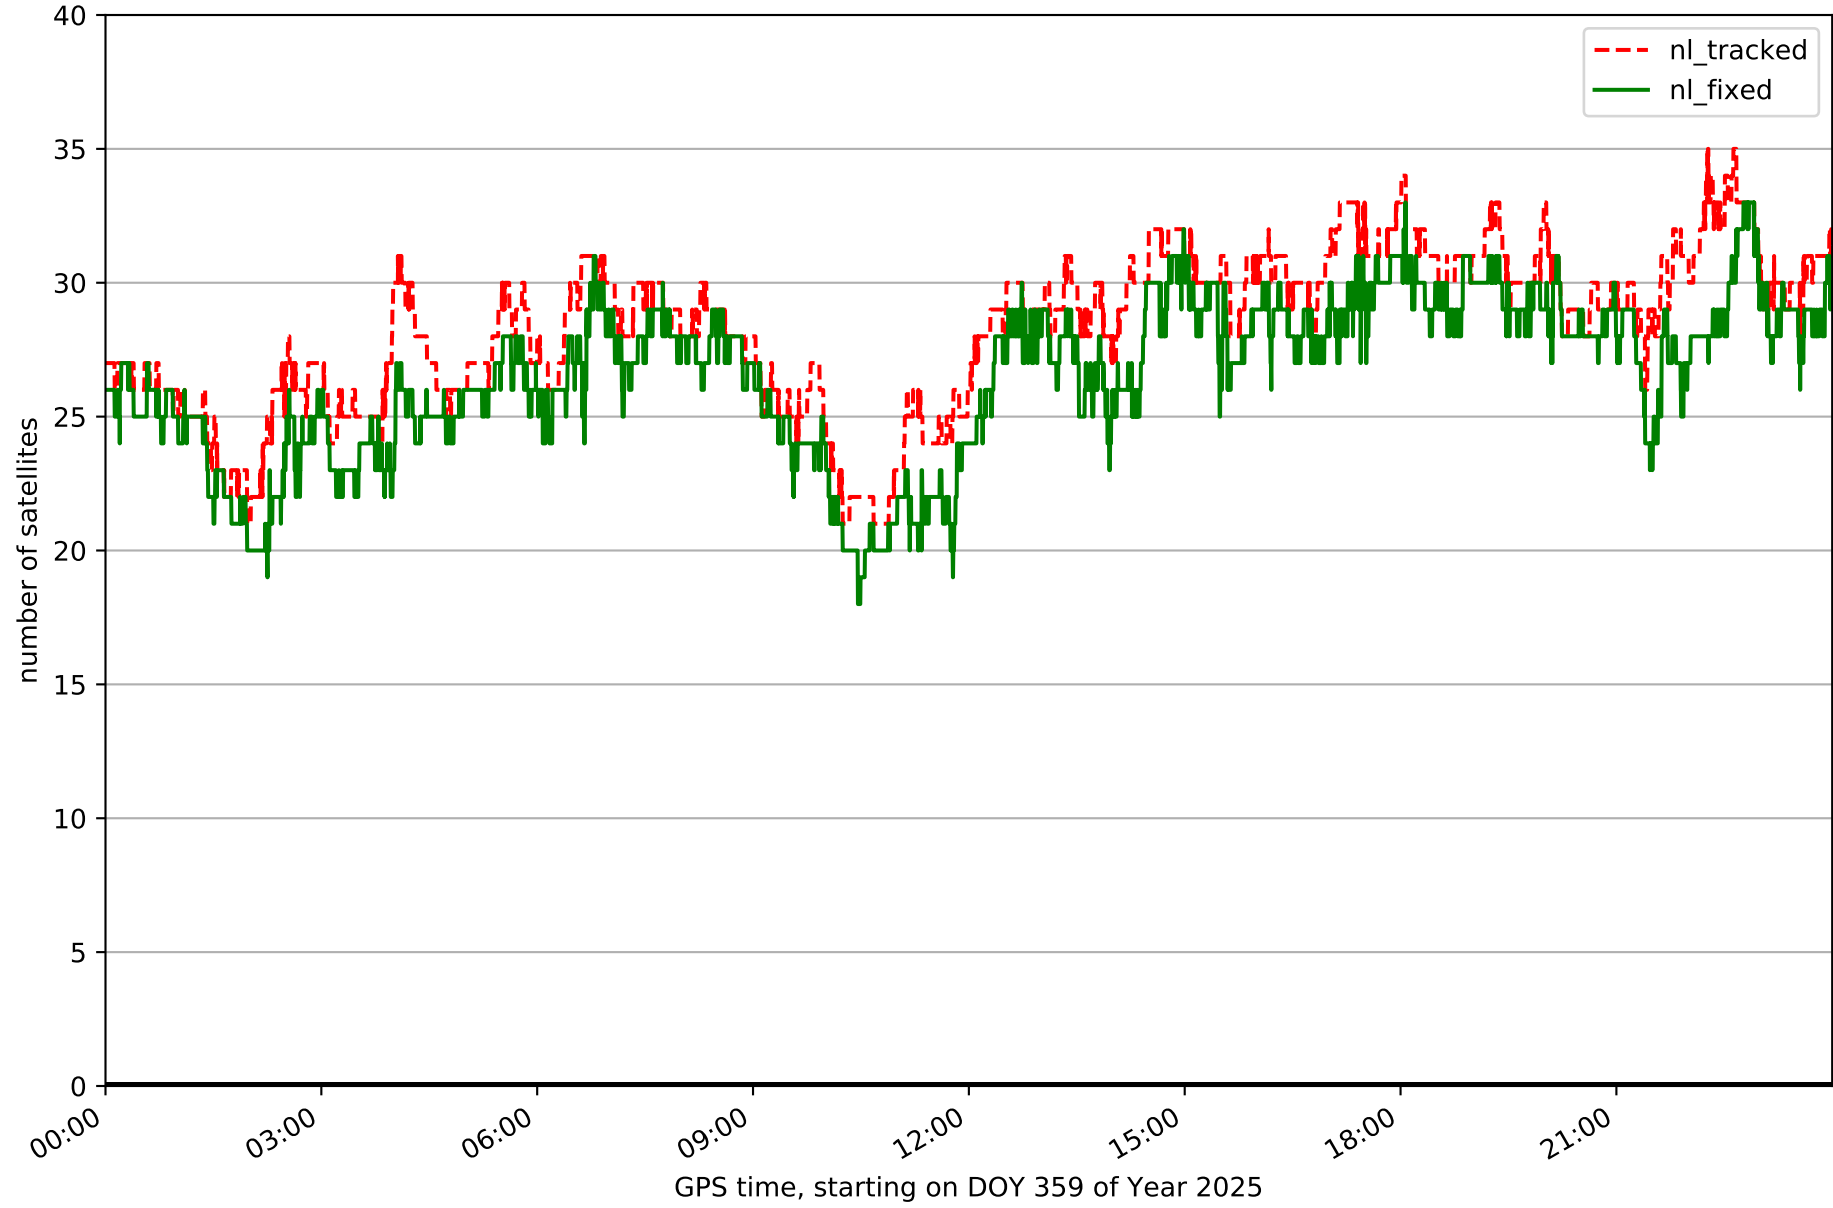


Fixing percentage of satellites in network NT32 with threshold set to 0.3

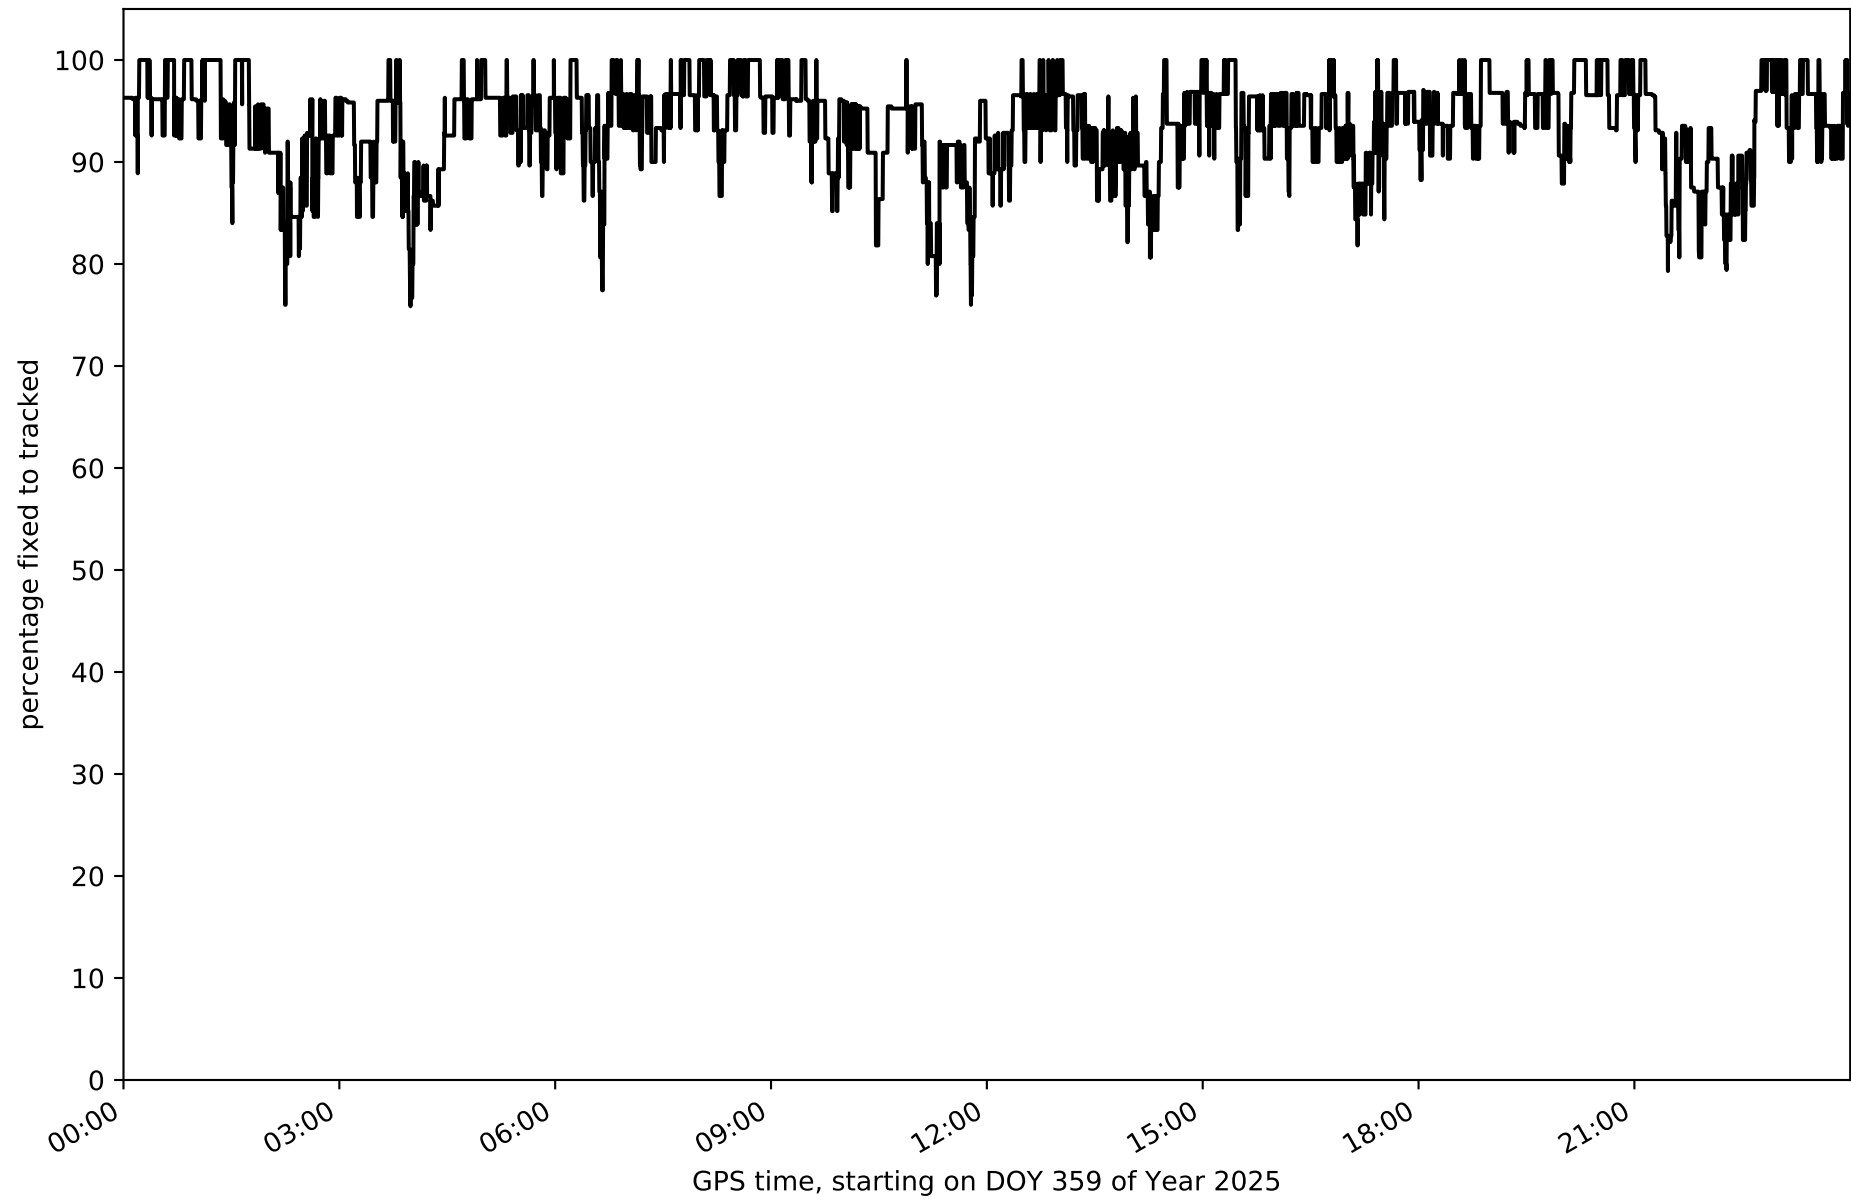


Network NT32 - only GPS with threshold set to 0.3

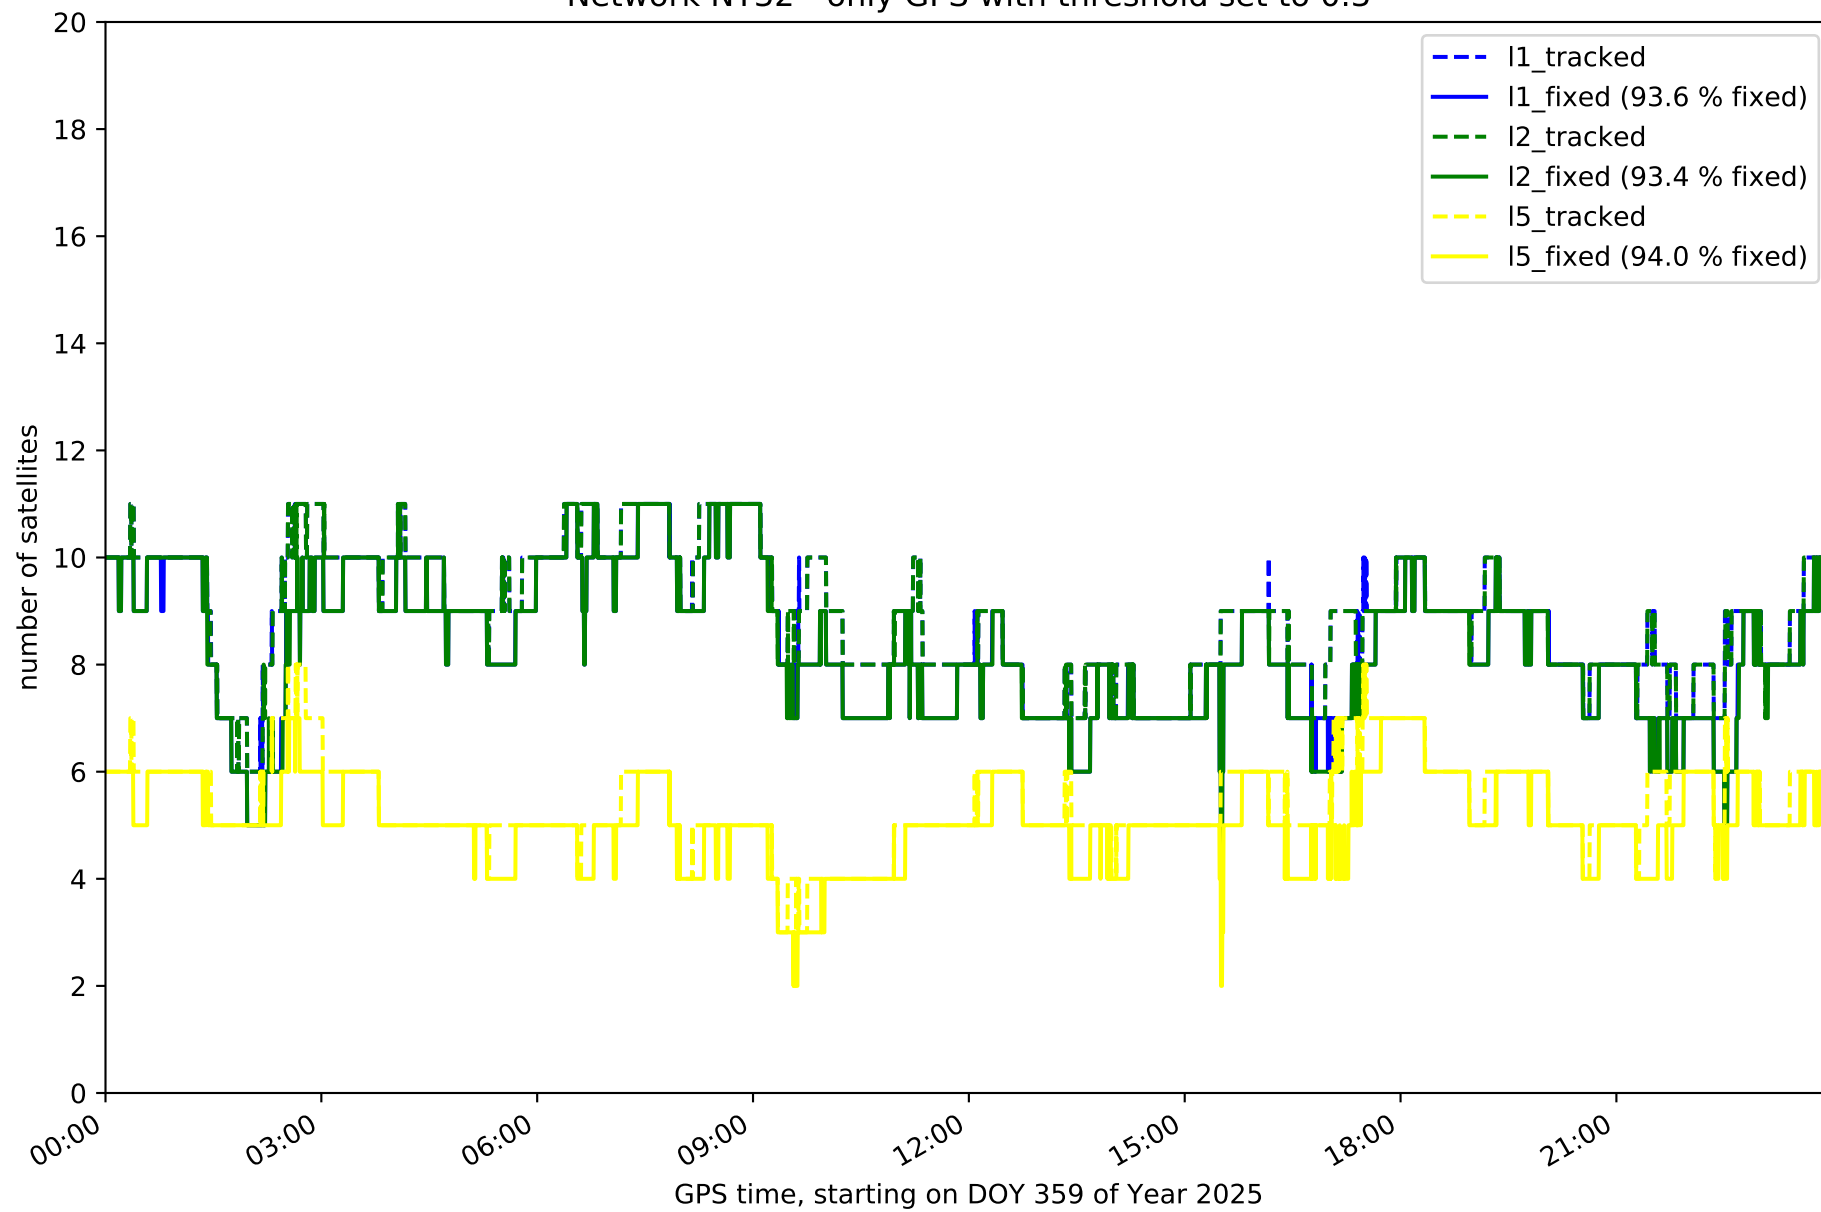


Network NT32 - only GLONASS with threshold set to 0.3

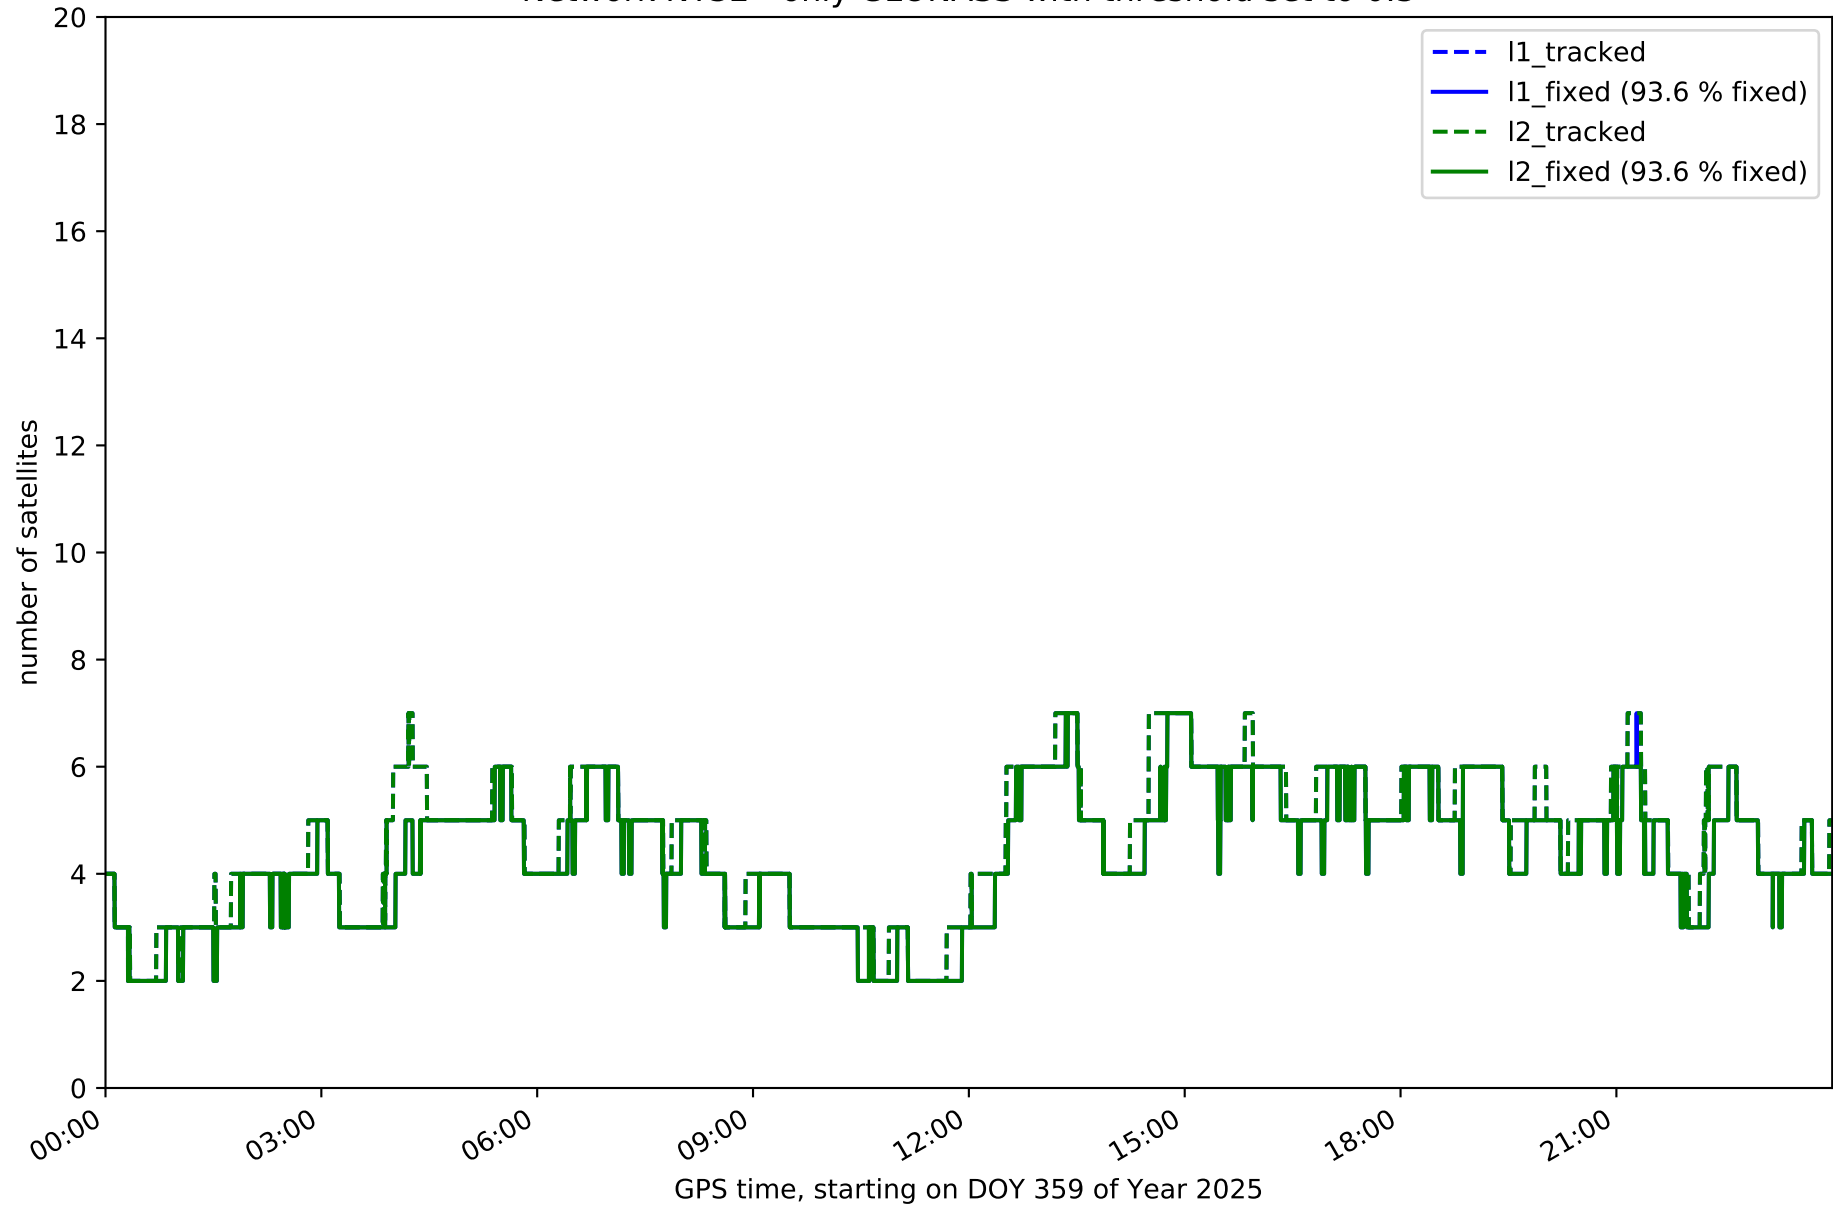


Network NT32 - only BDS with threshold set to 0.3

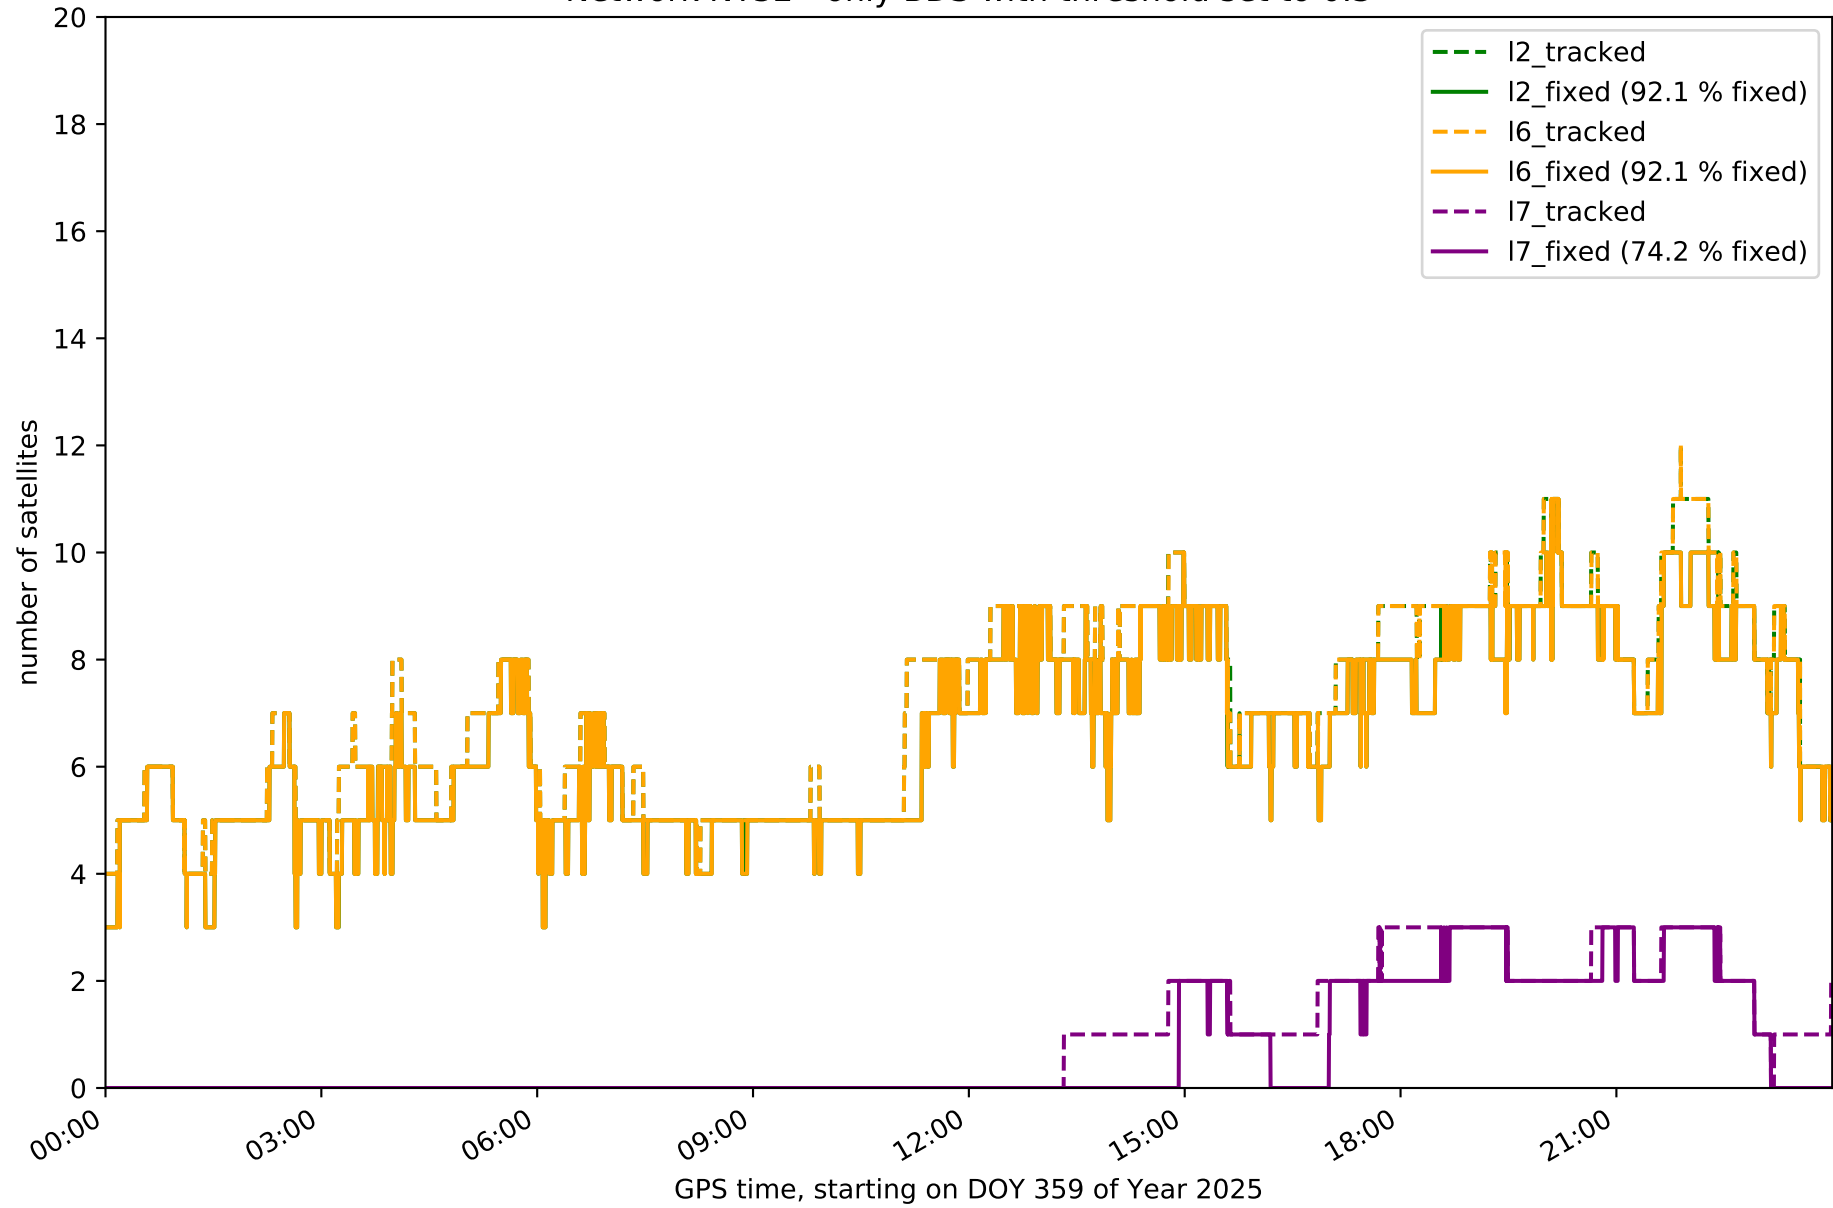


Network NT32 - only Galileo with threshold set to 0.3

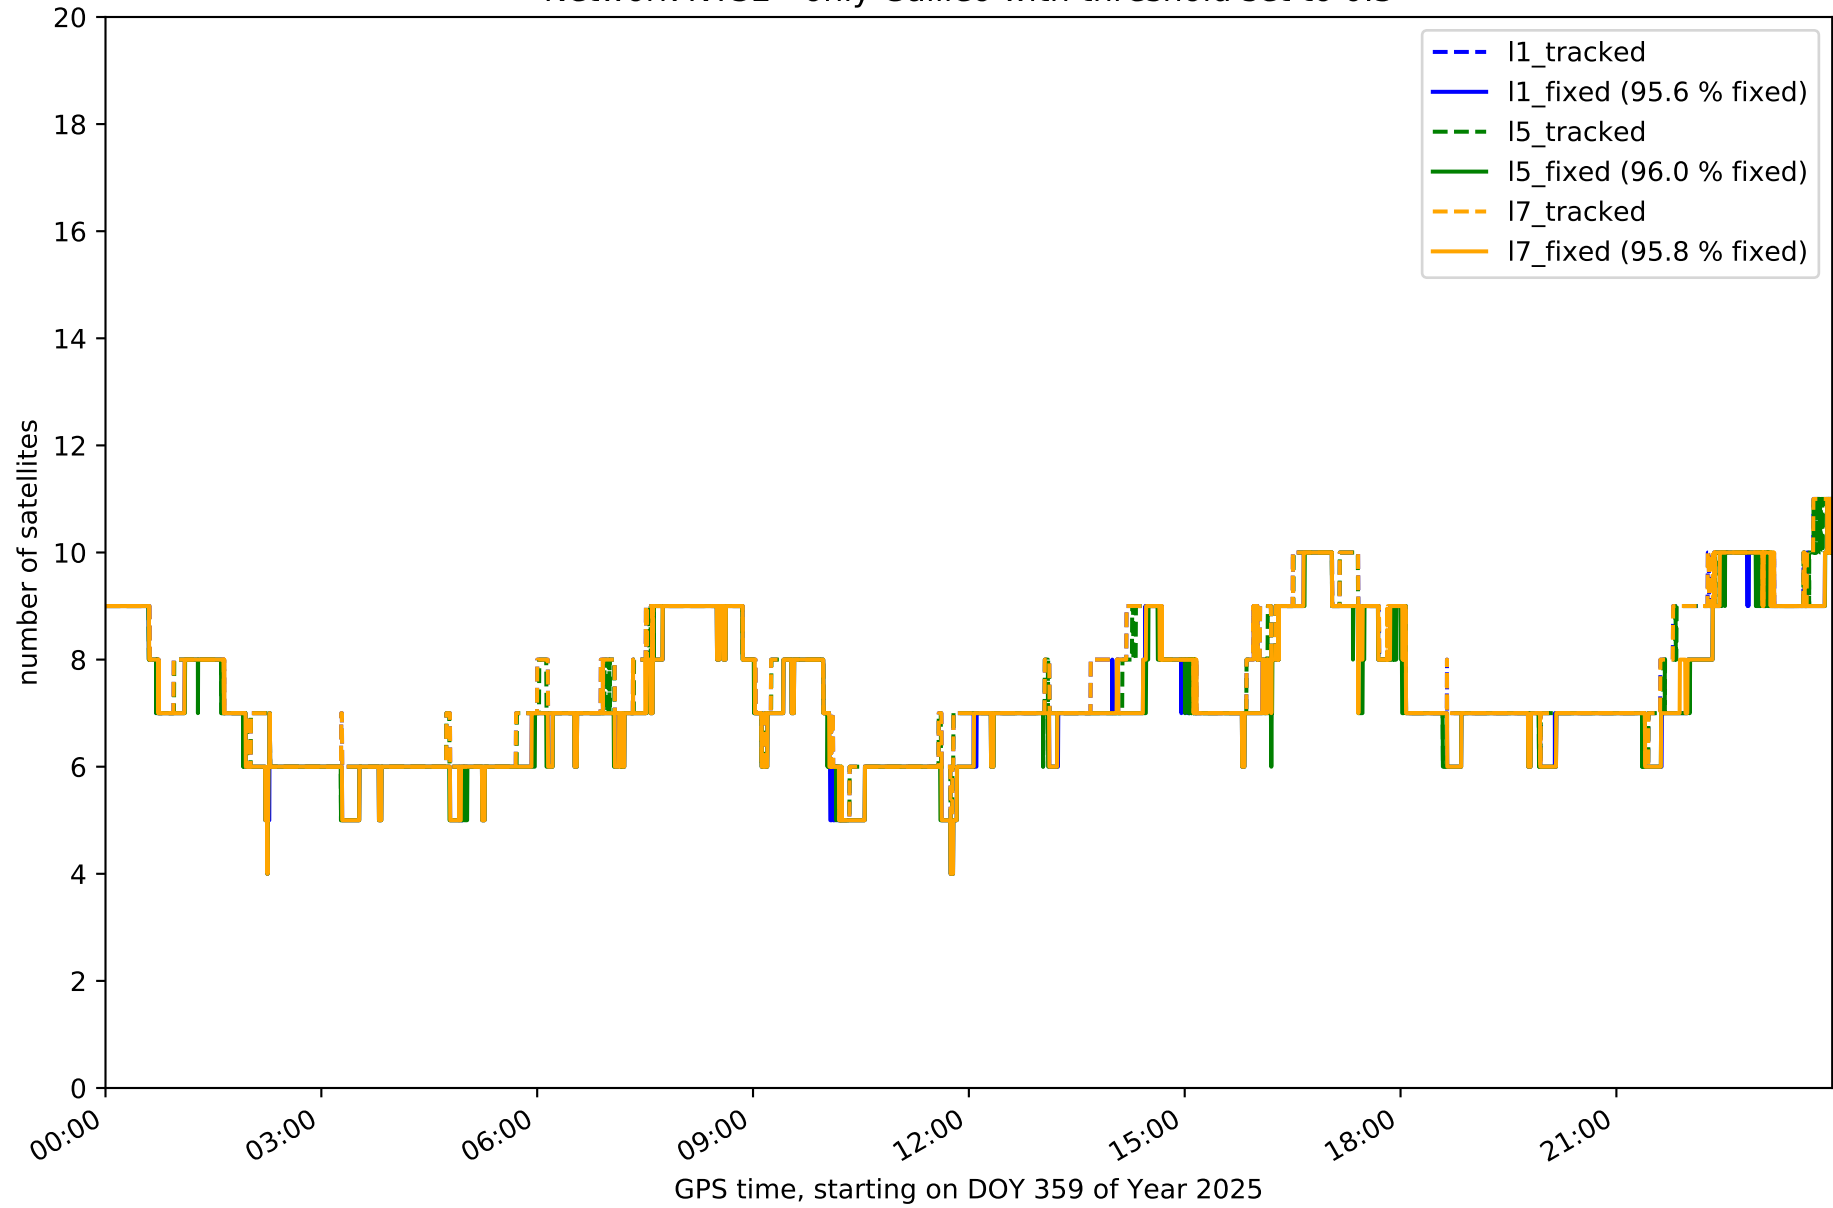


Station EH01 in network NT32

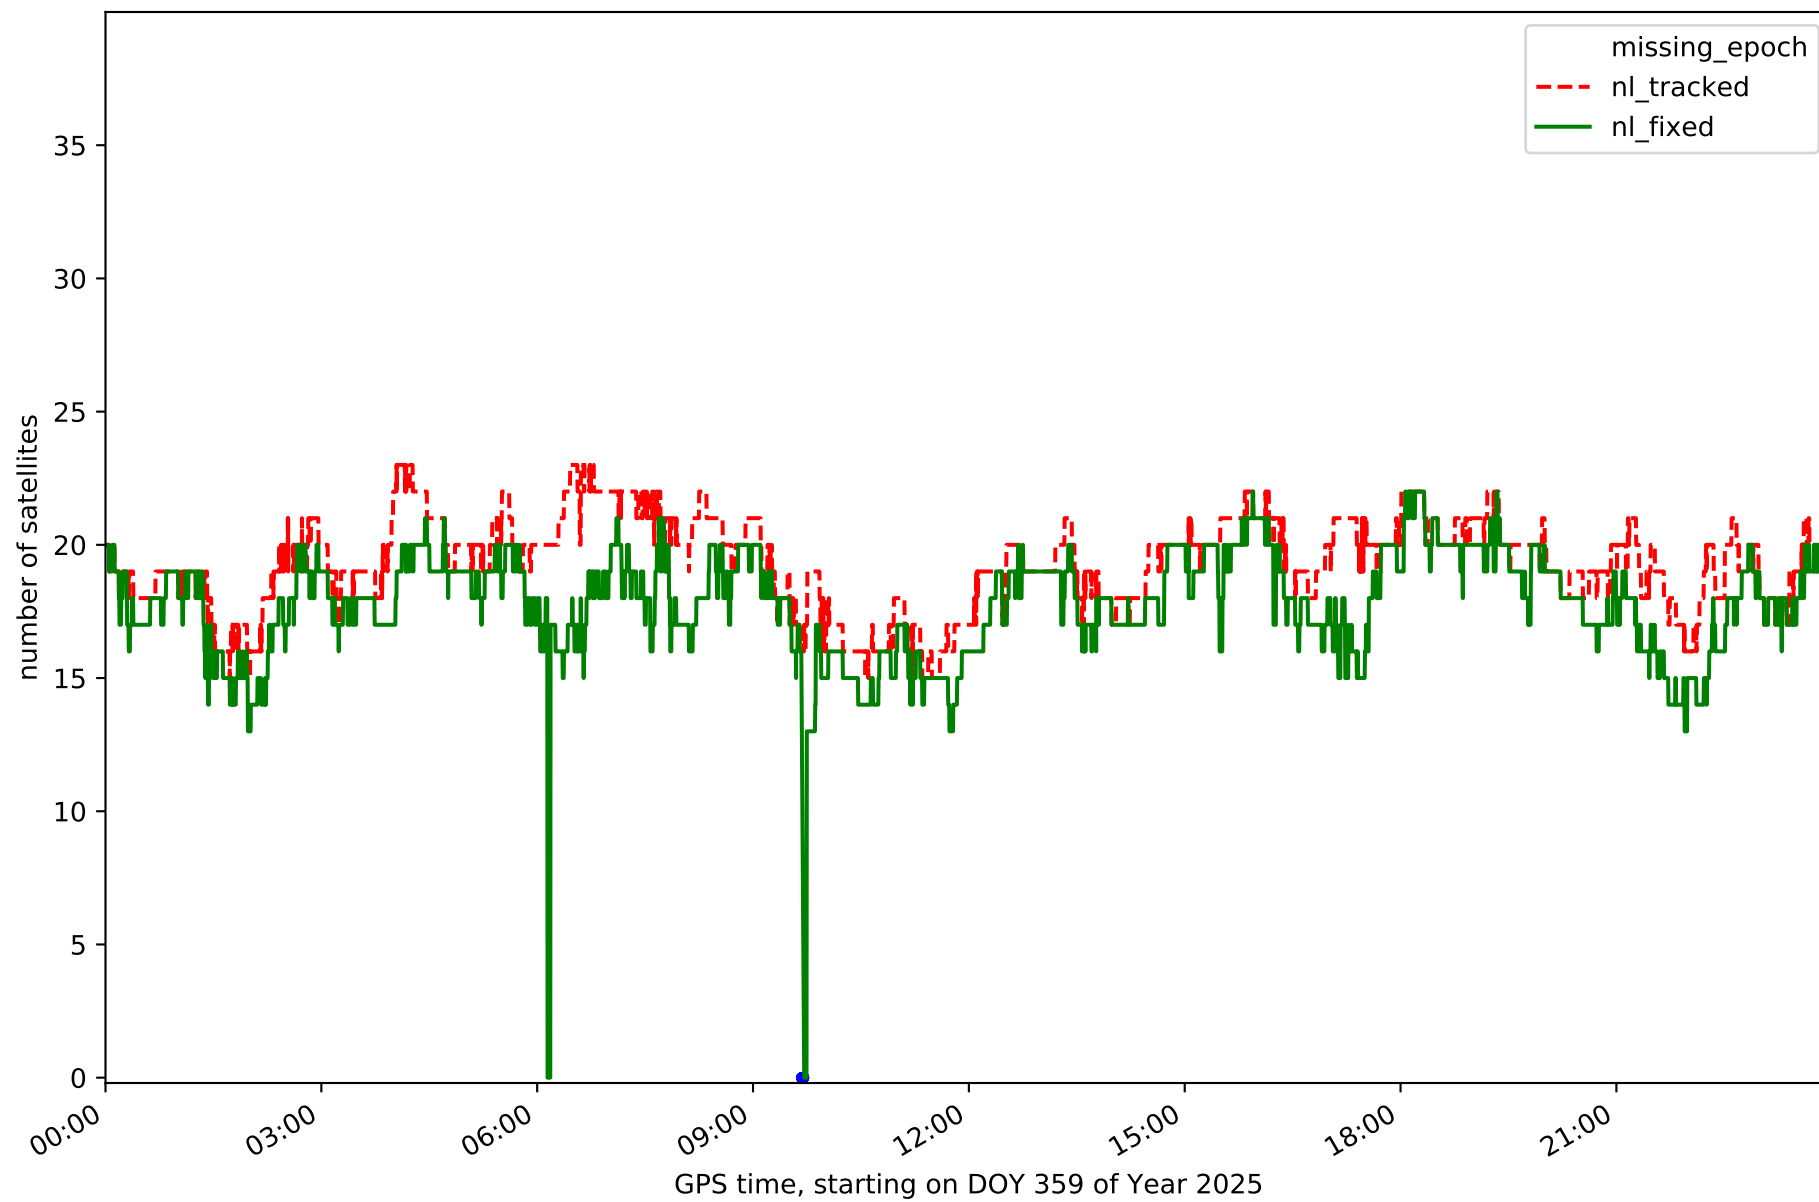


Station EH02 in network NT32

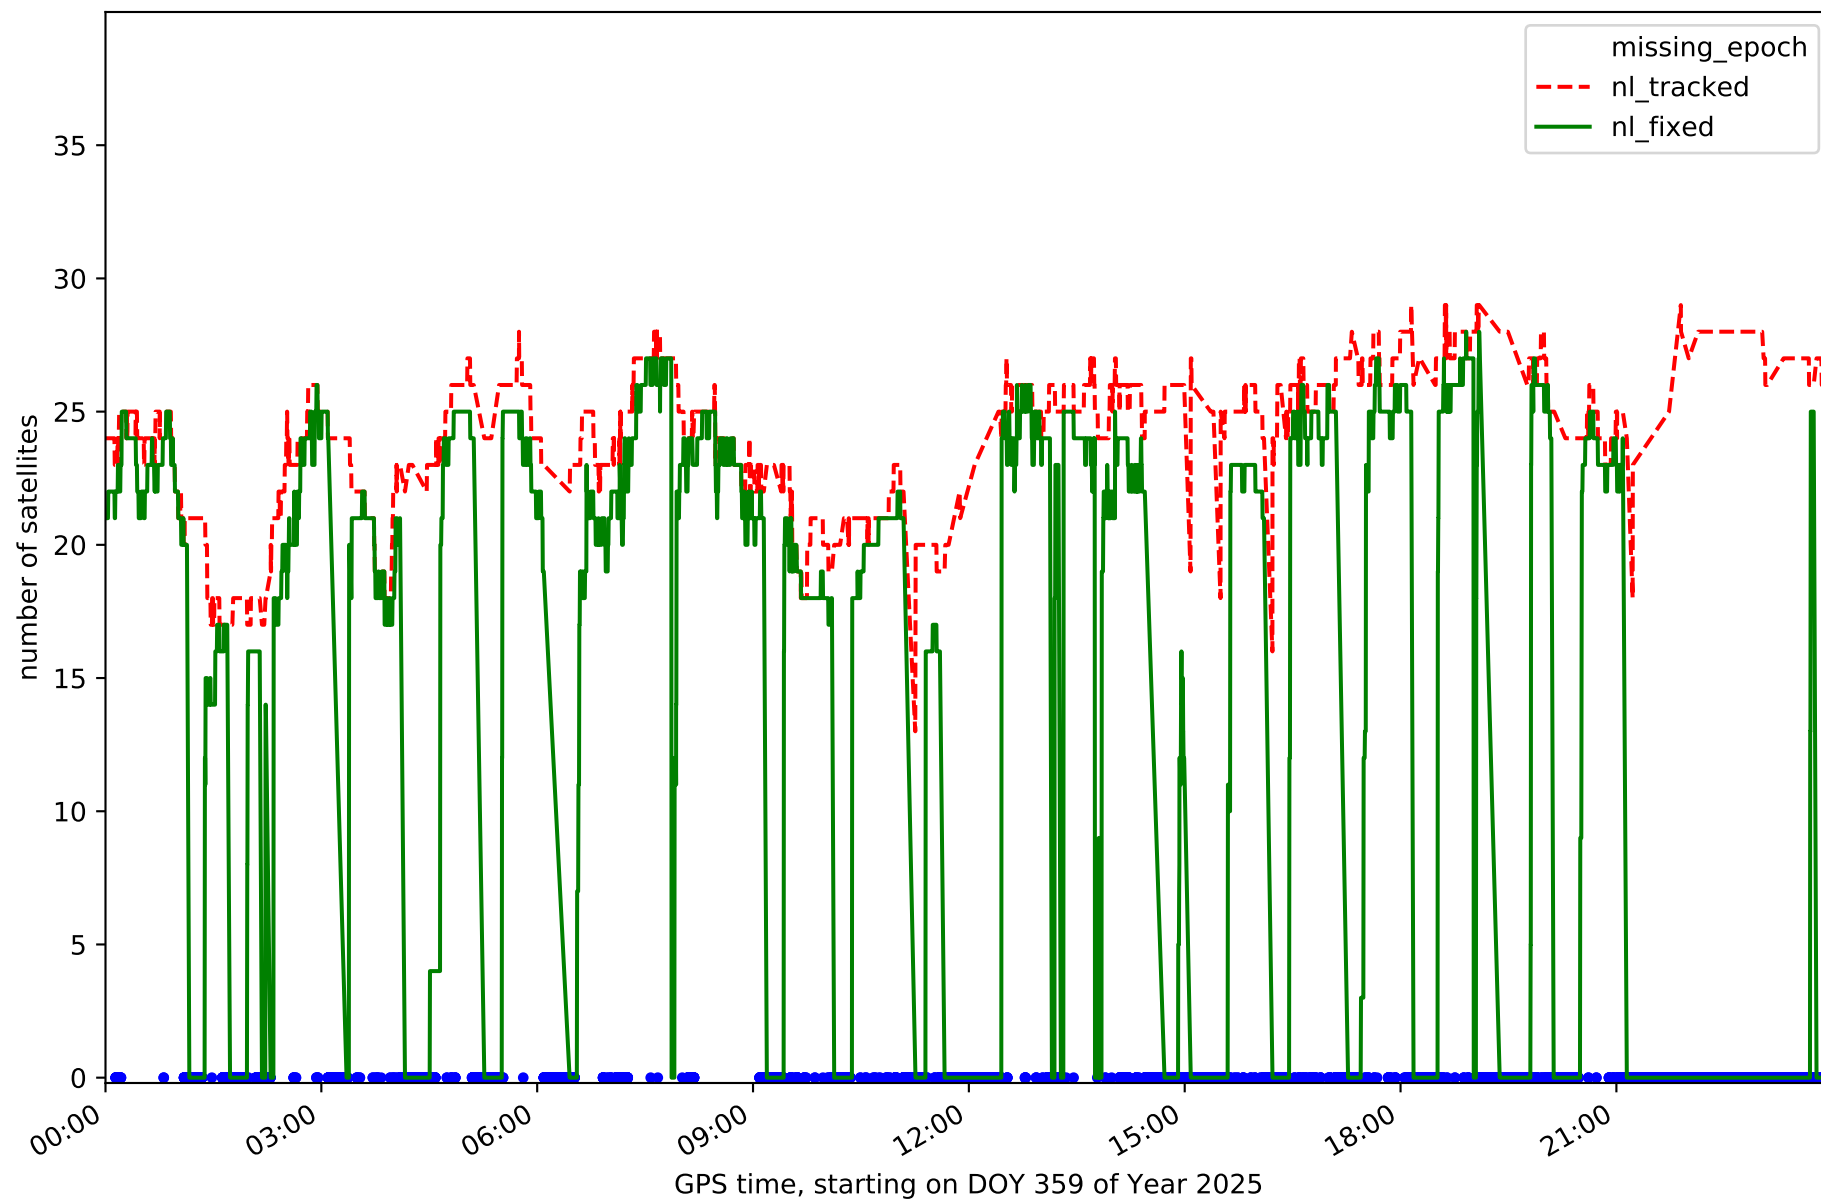


Station GOM1 in network NT32

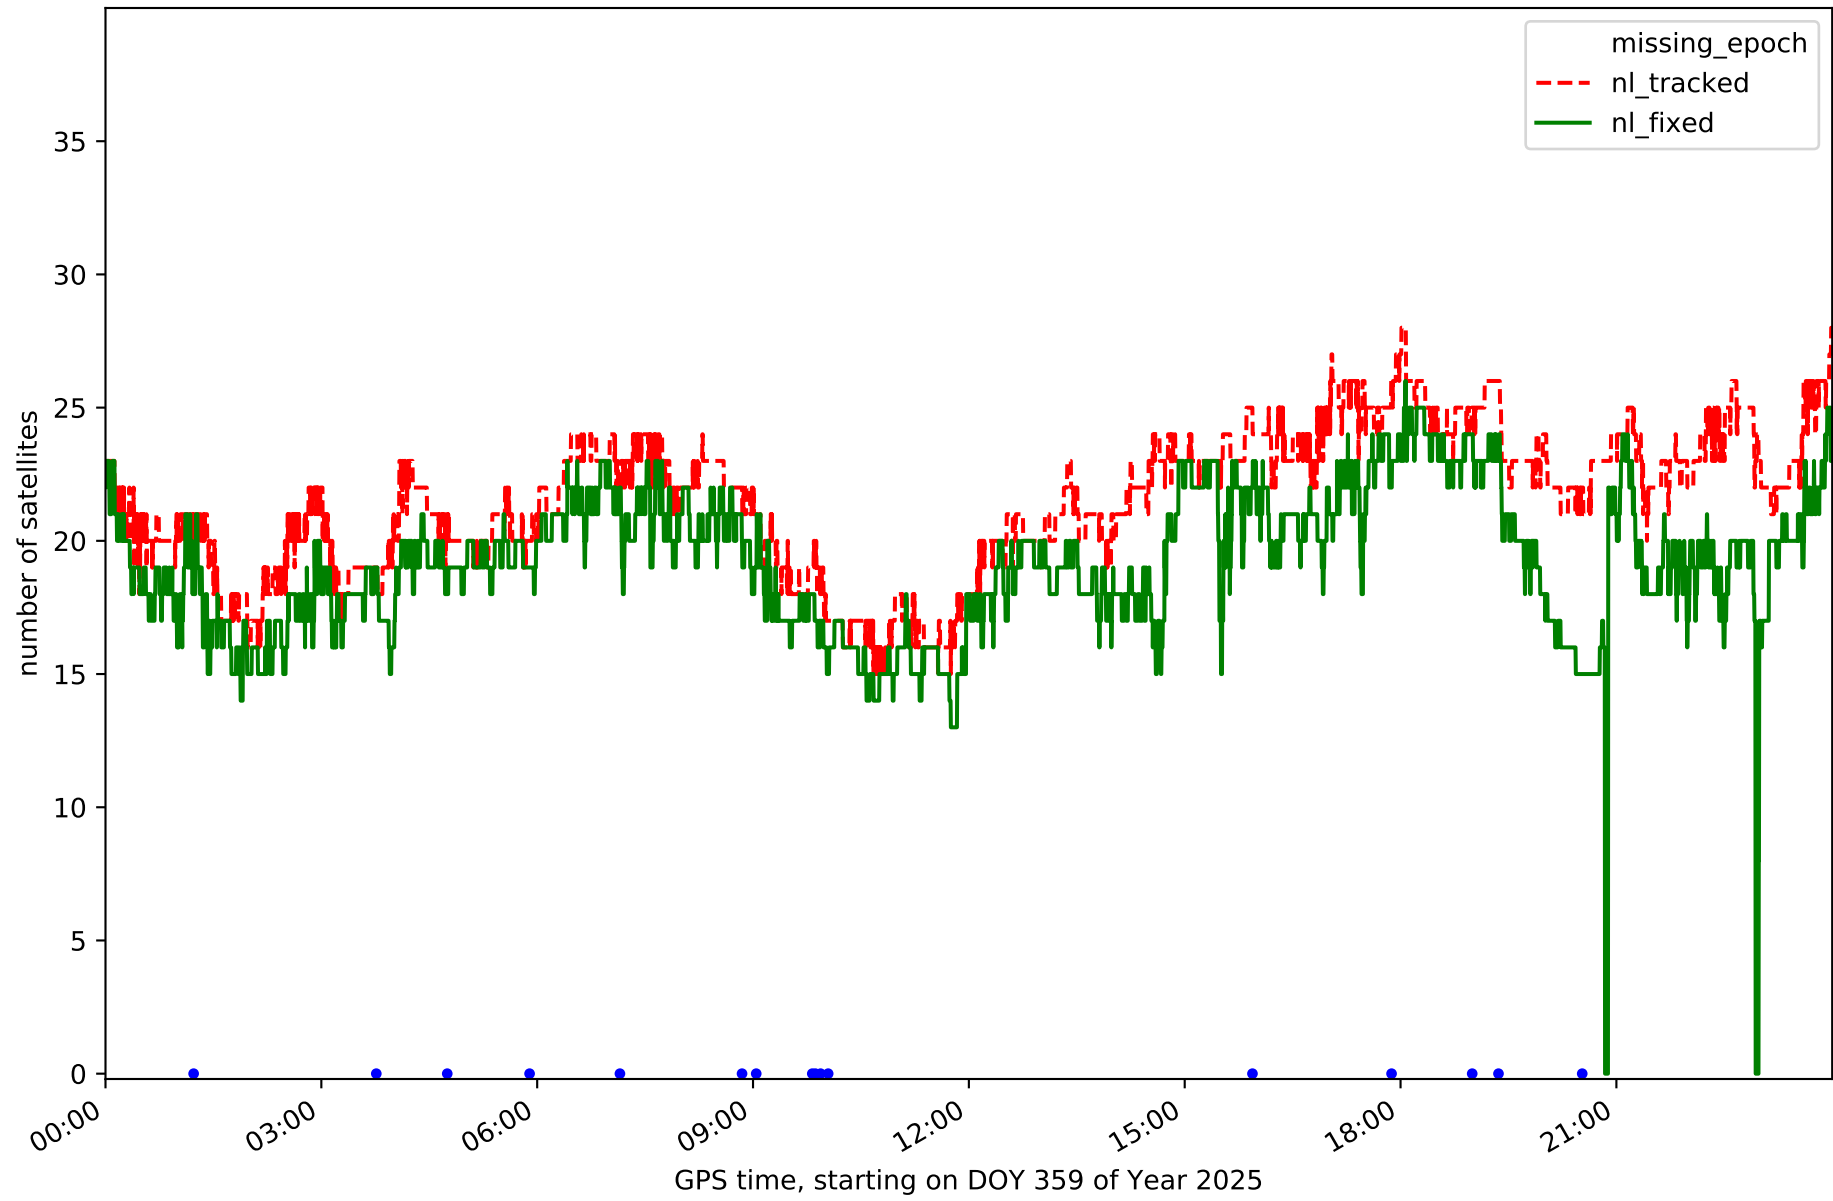


Station GOME in network NT32

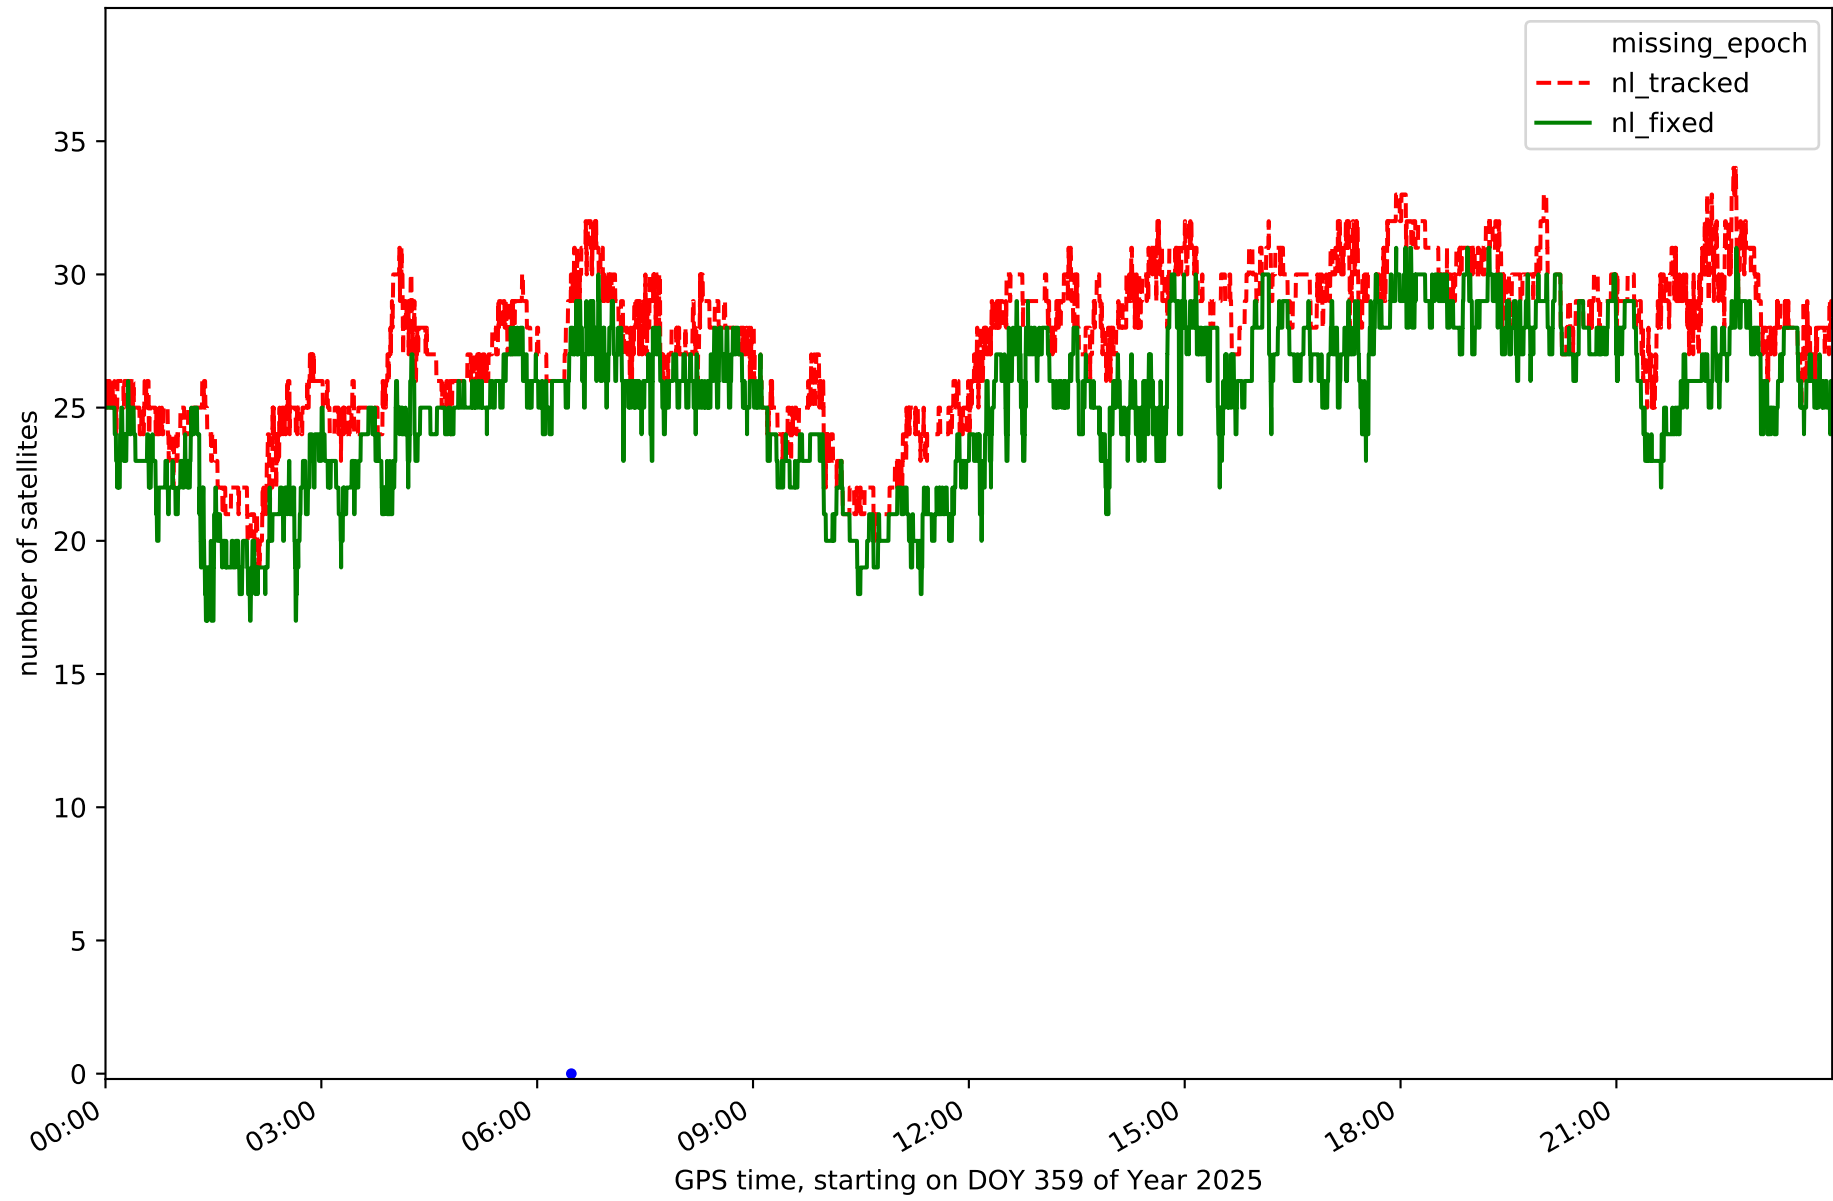


Station IZAN in network NT32

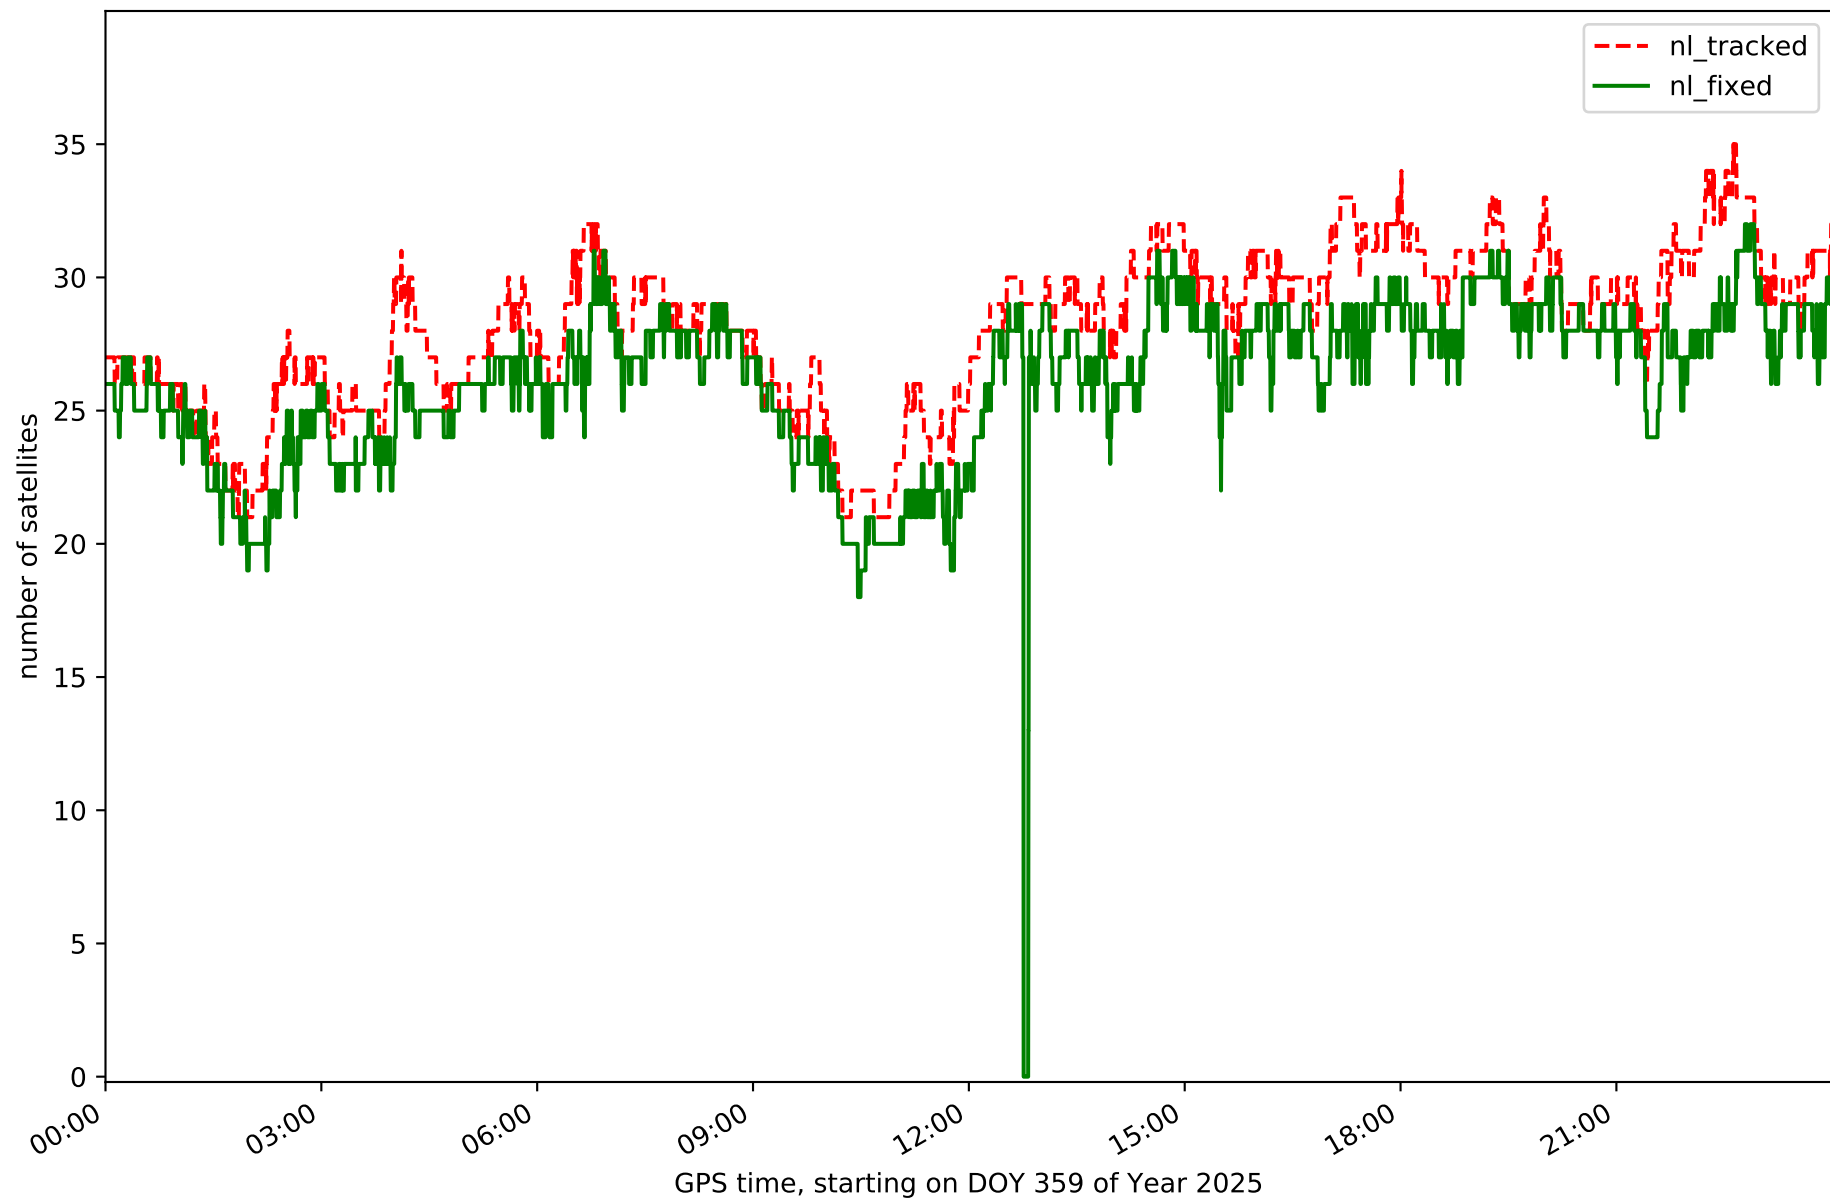


Station LP01 in network NT32

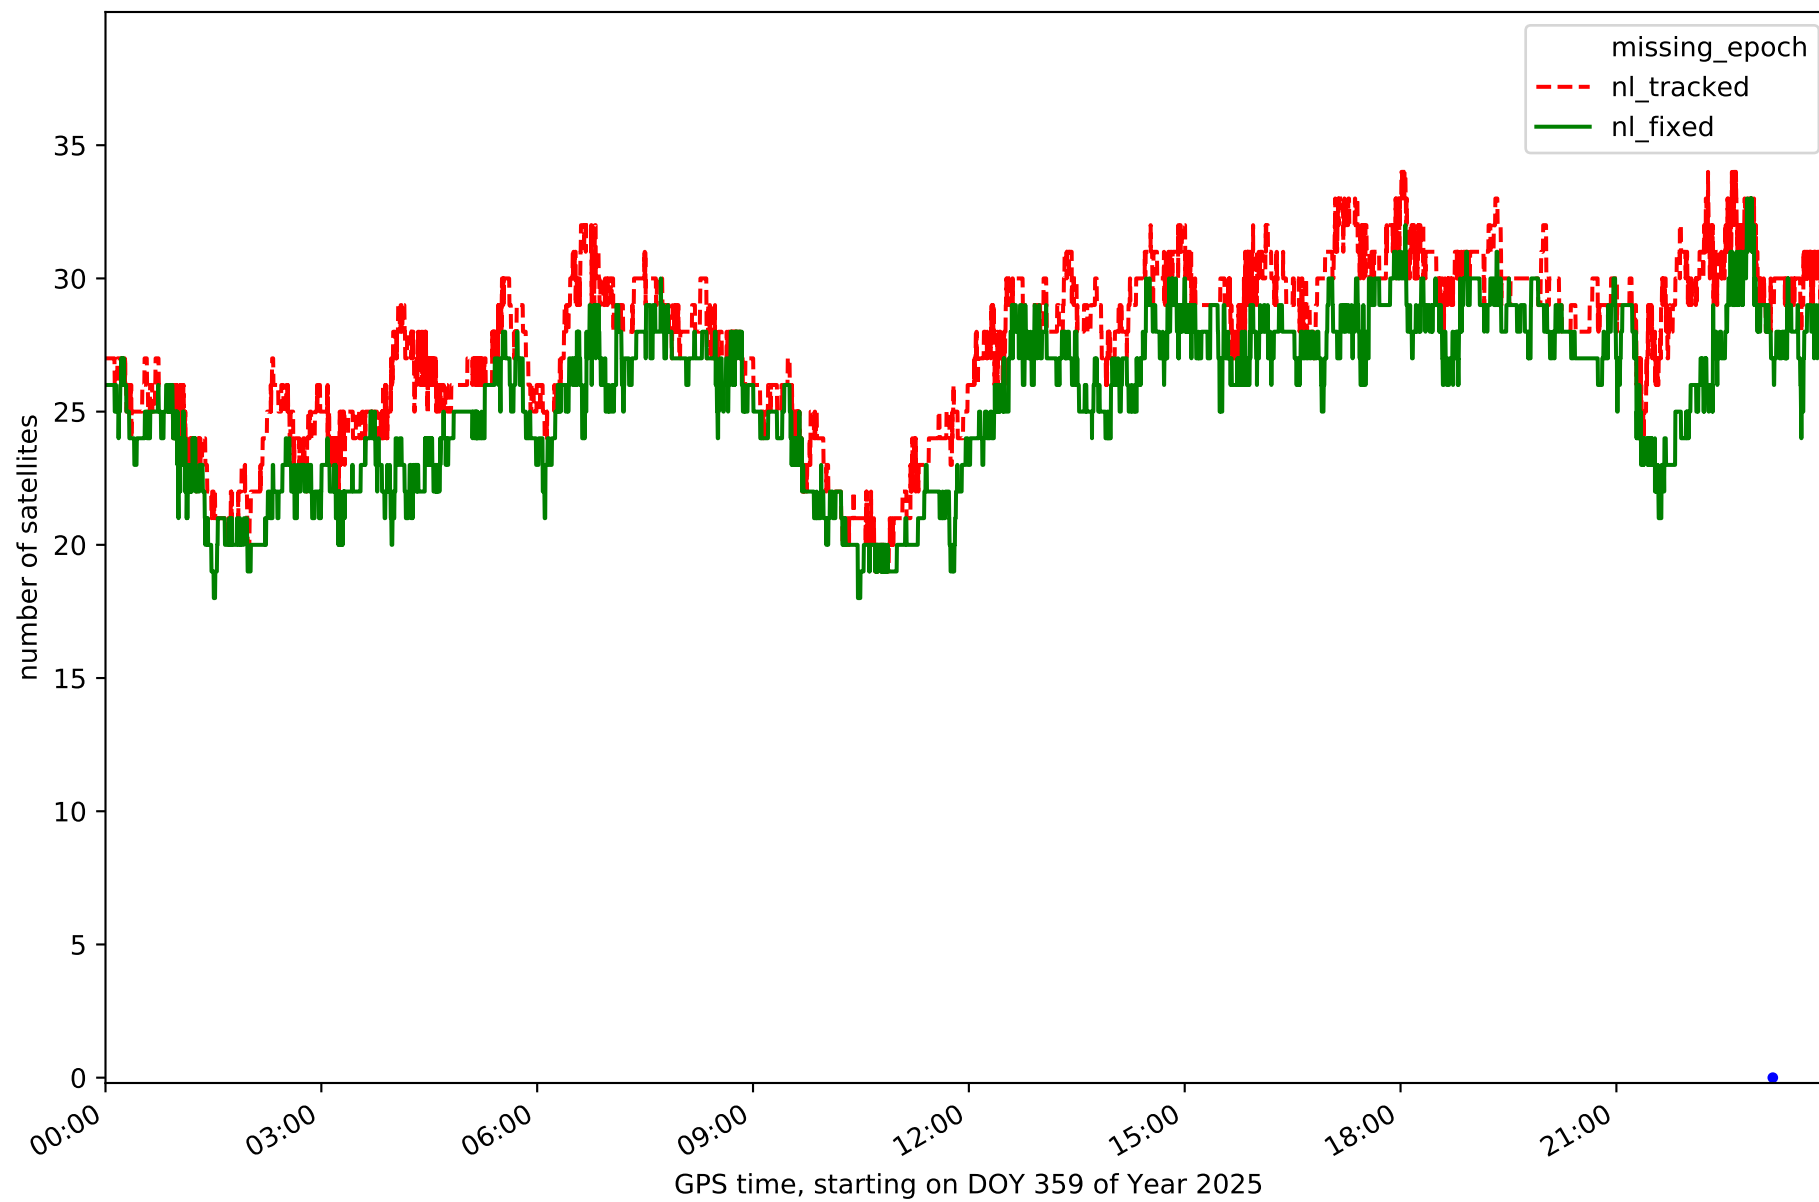


Station LP03 in network NT32

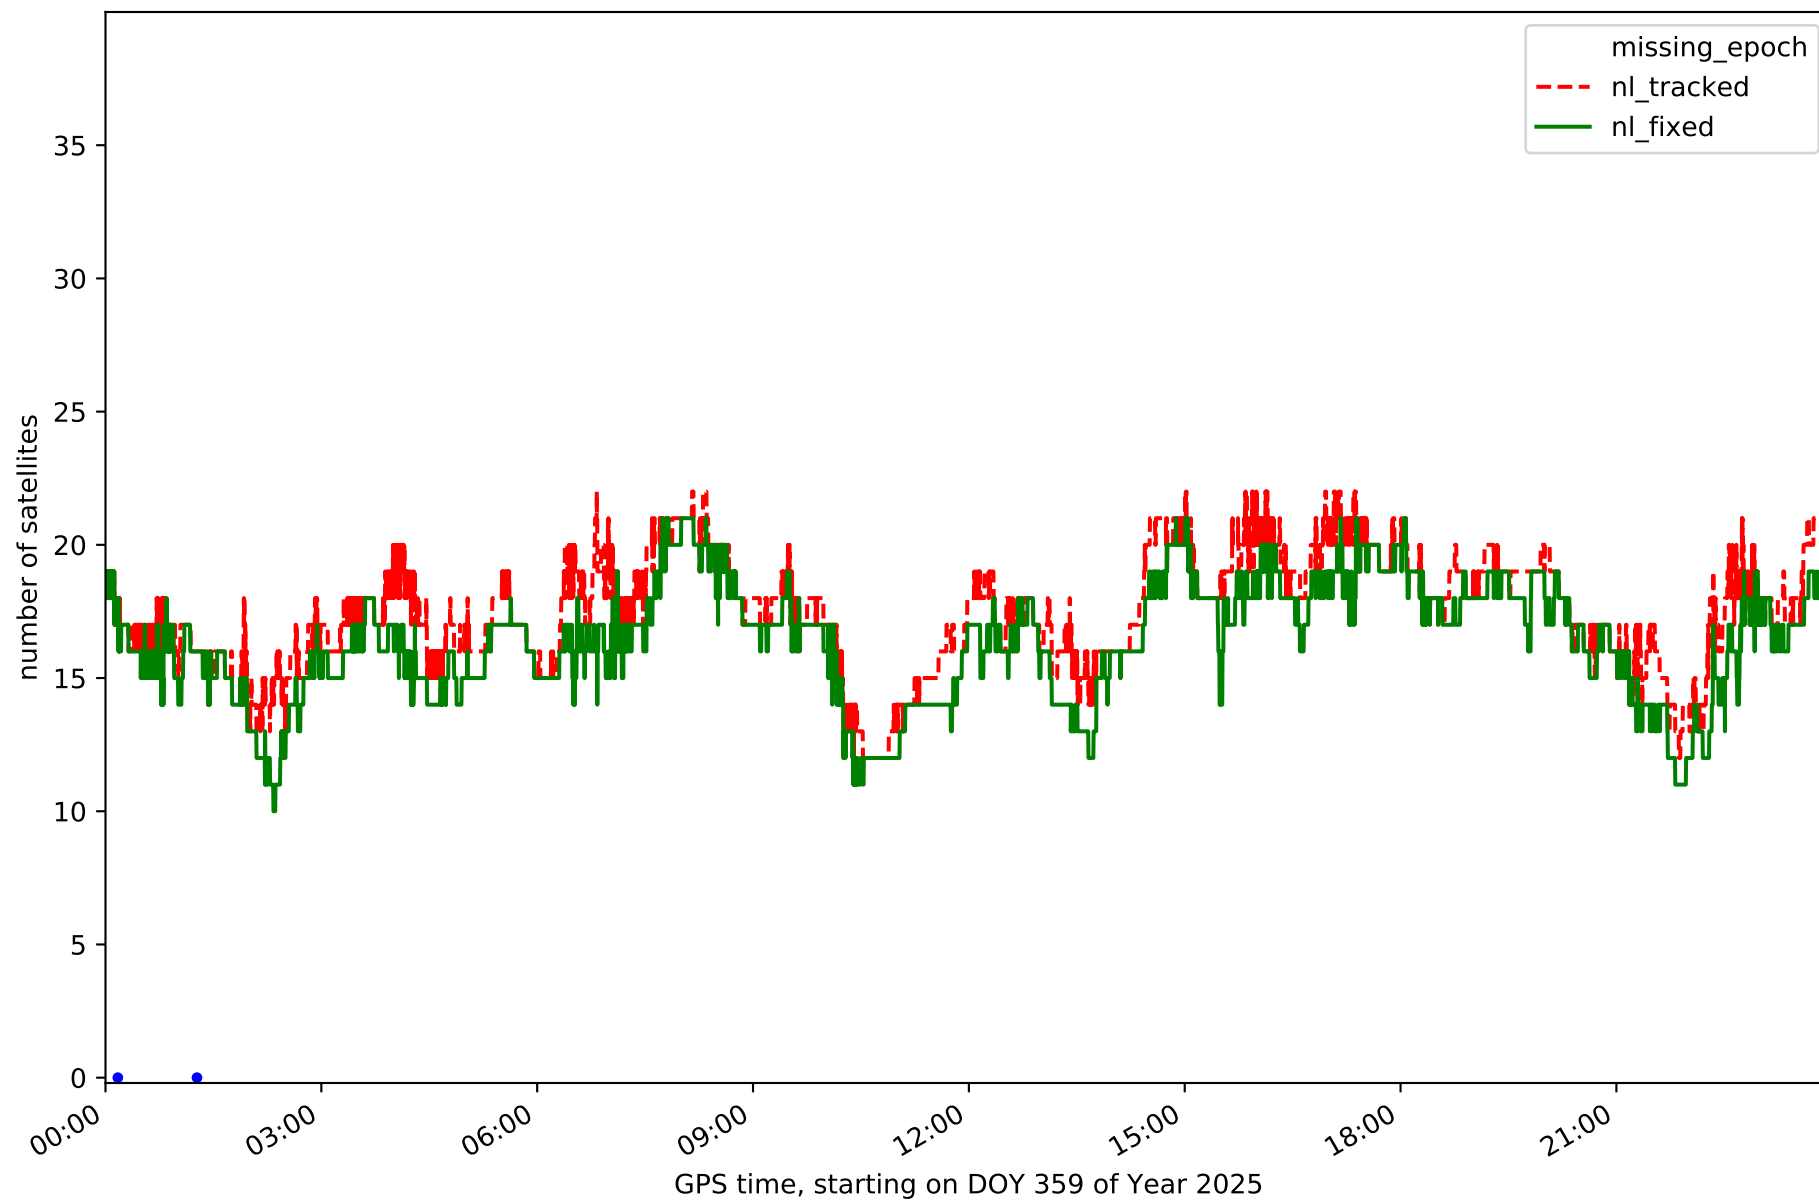


Station LPAL in network NT32

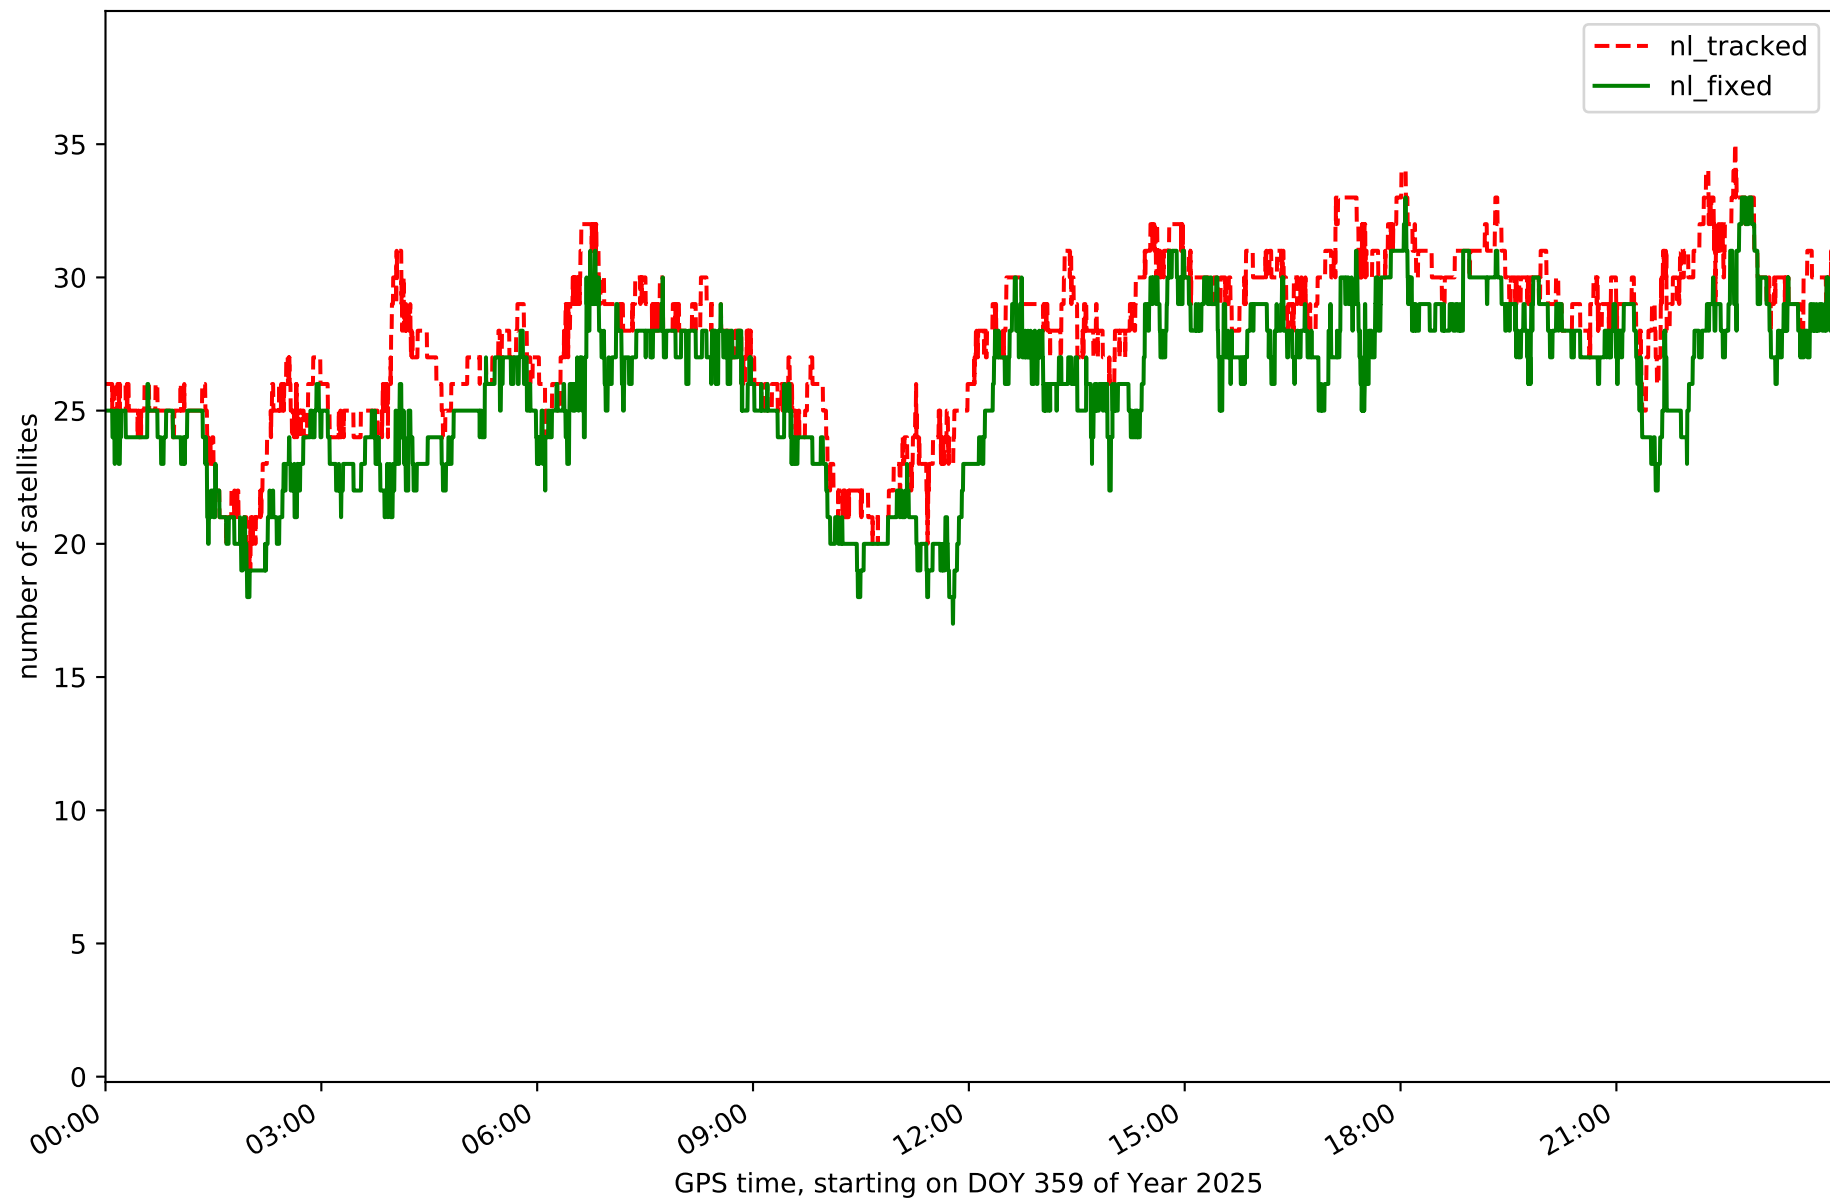


Station LRES in network NT32

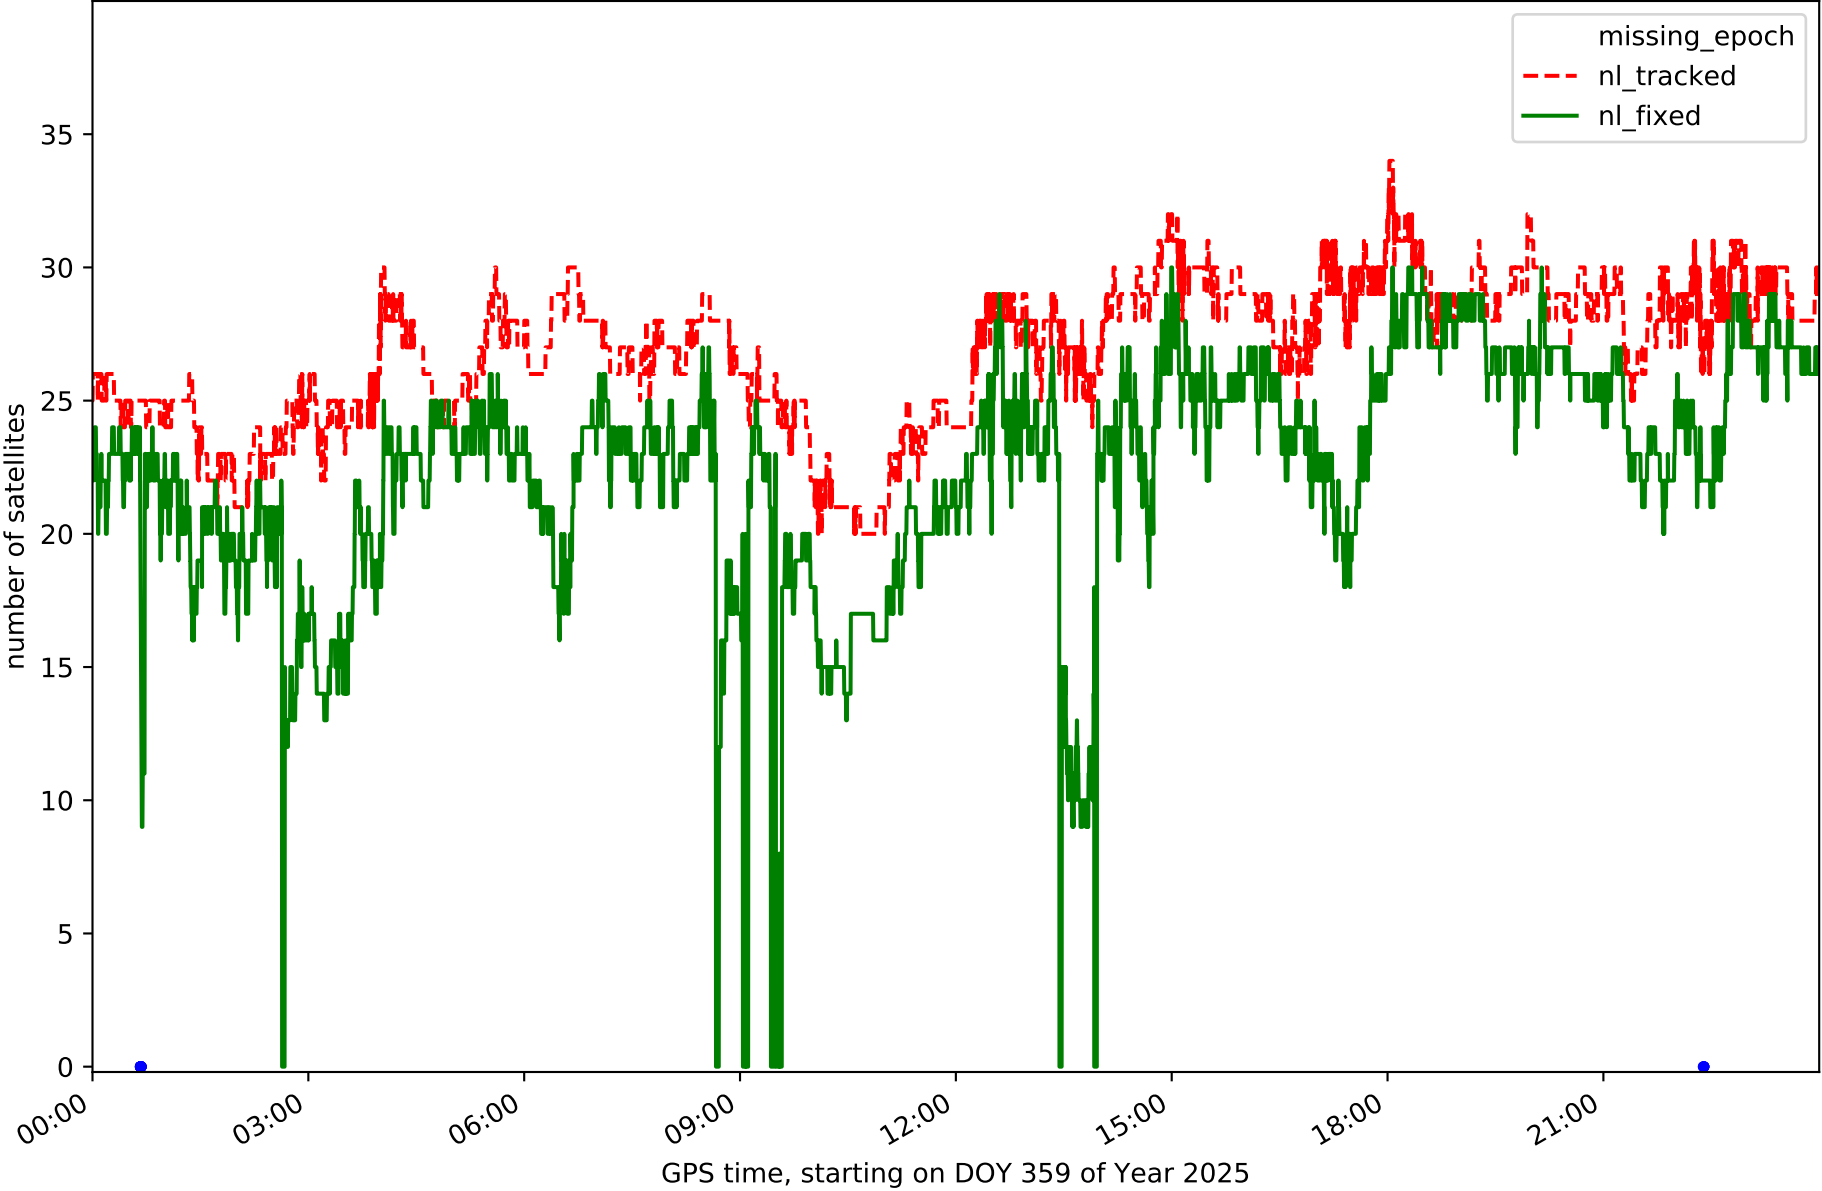


Station TN01 in network NT32

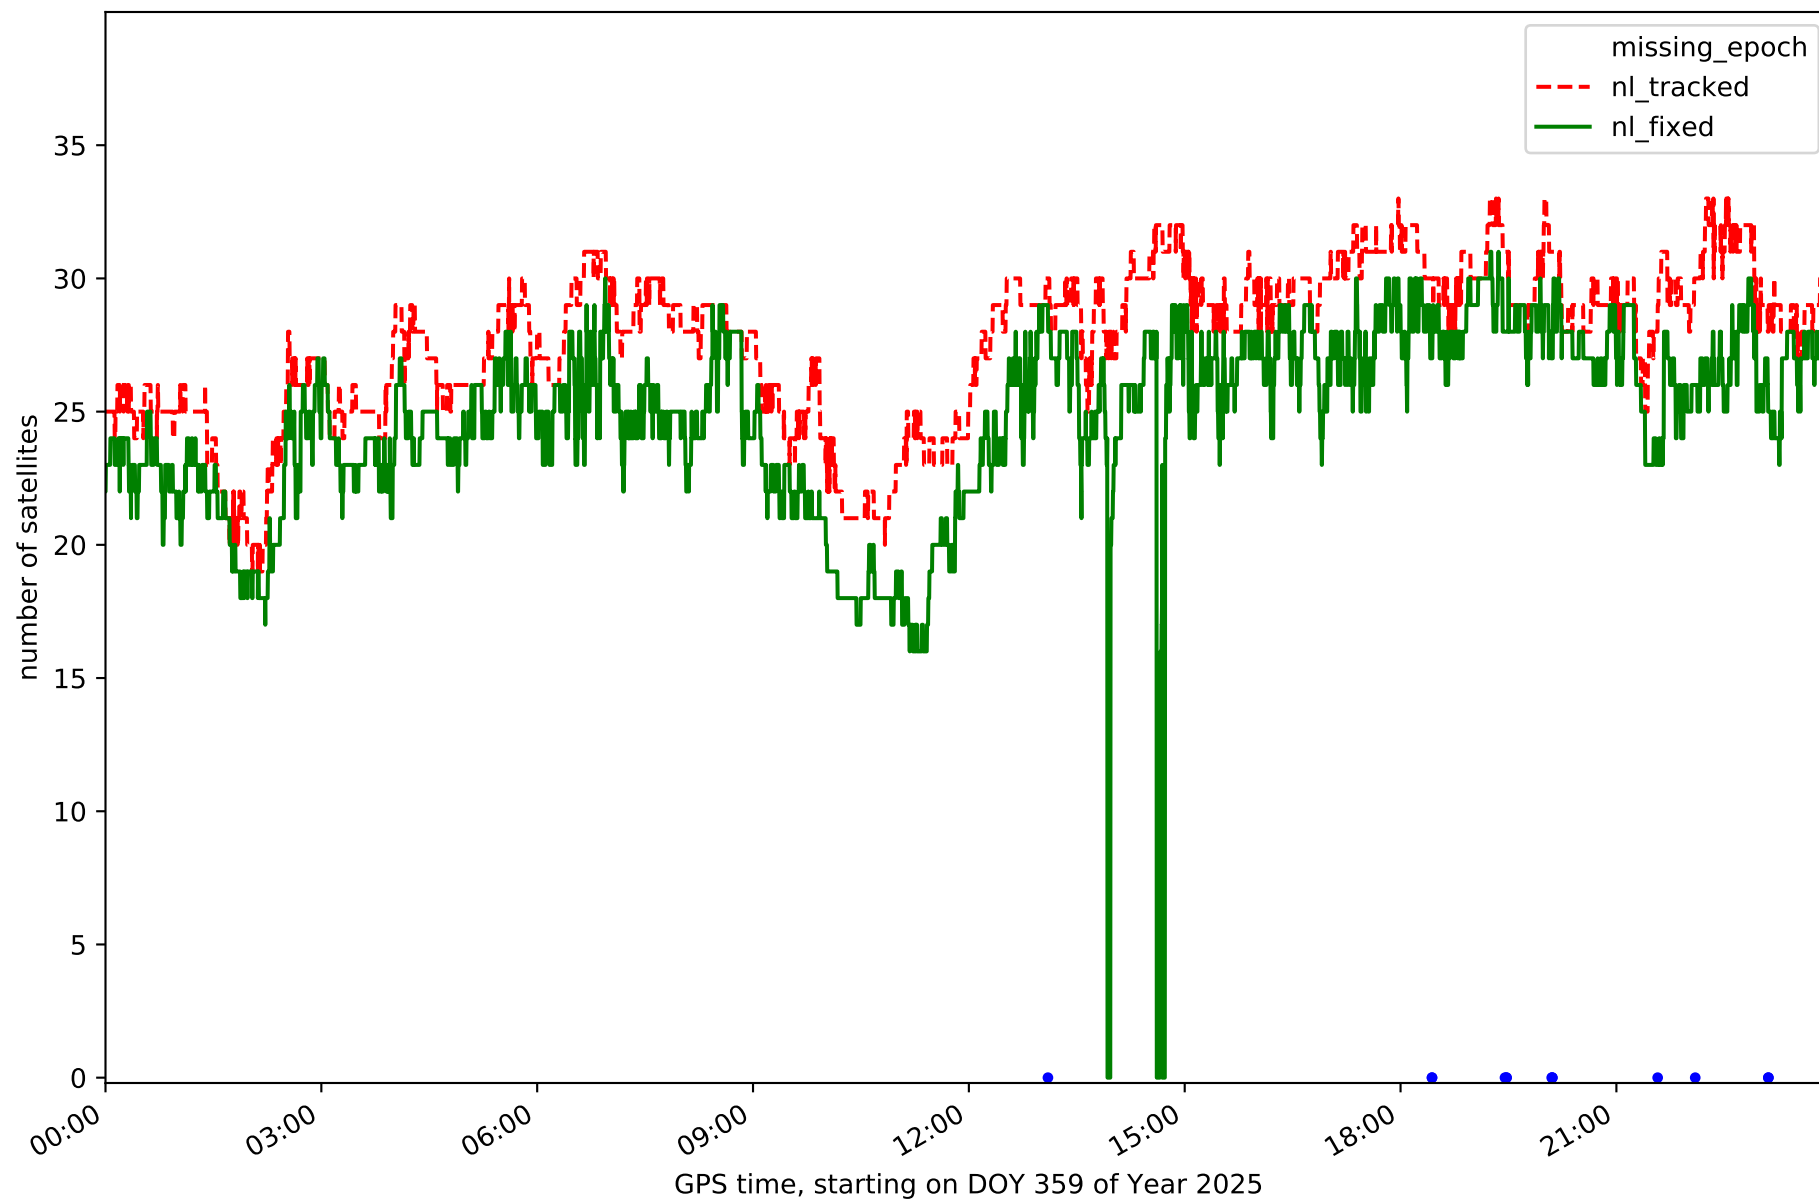


Station TN02 in network NT32

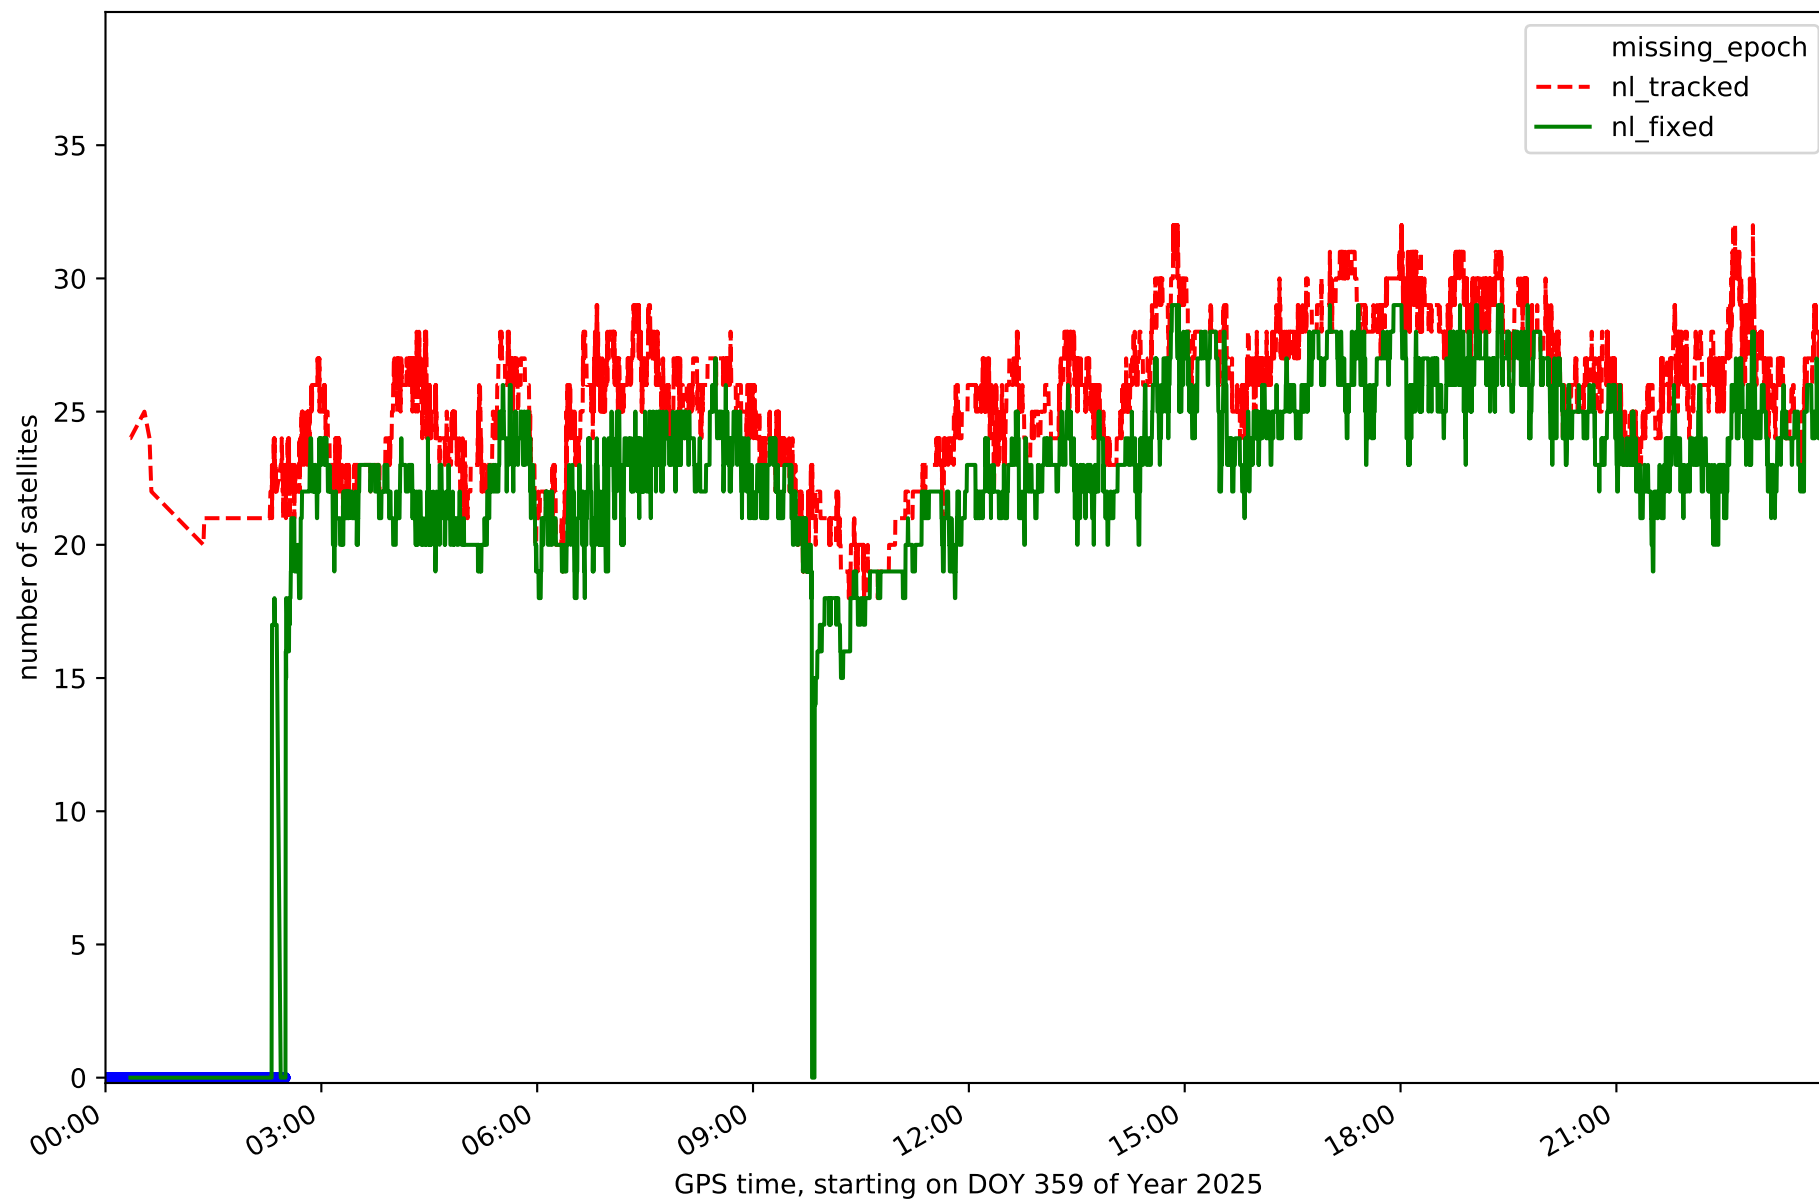


Station TN03 in network NT32

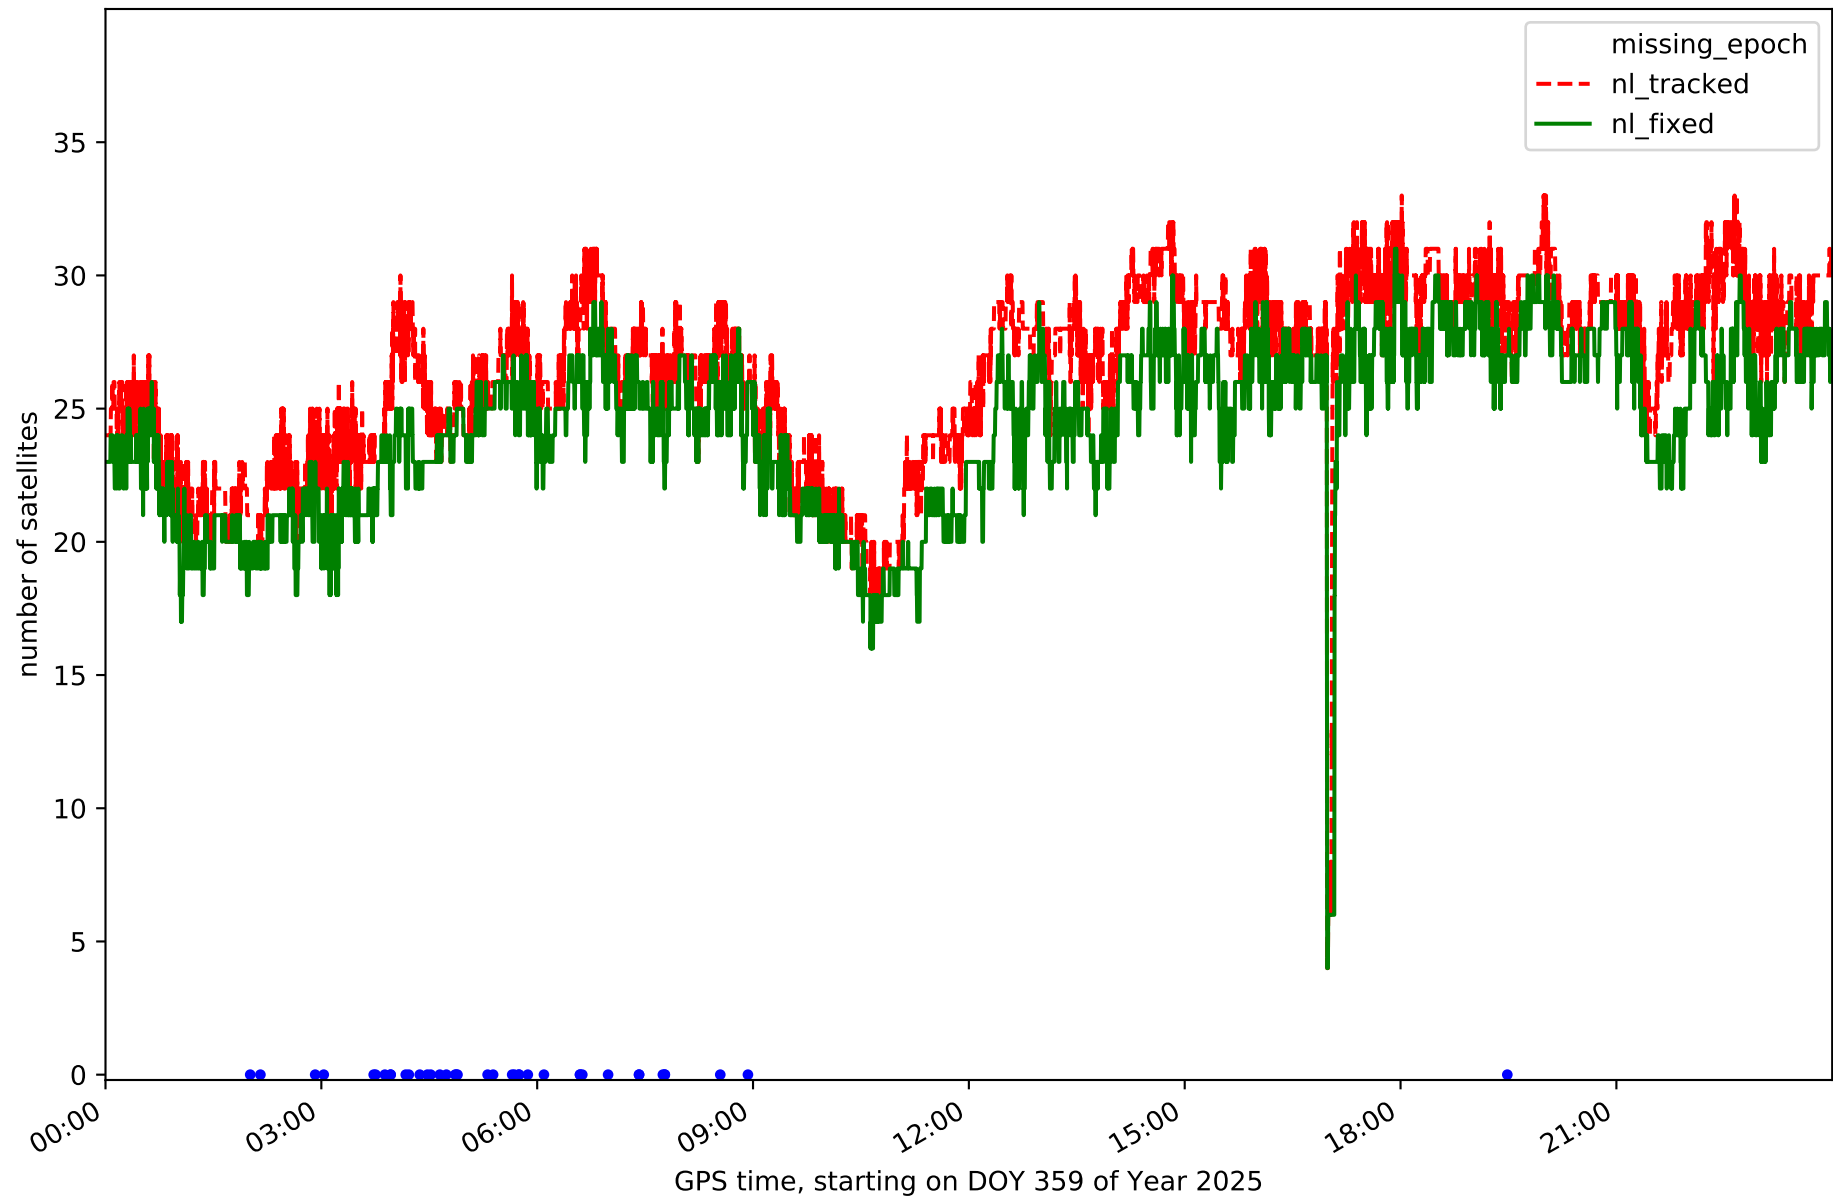


Station TN06 in network NT32

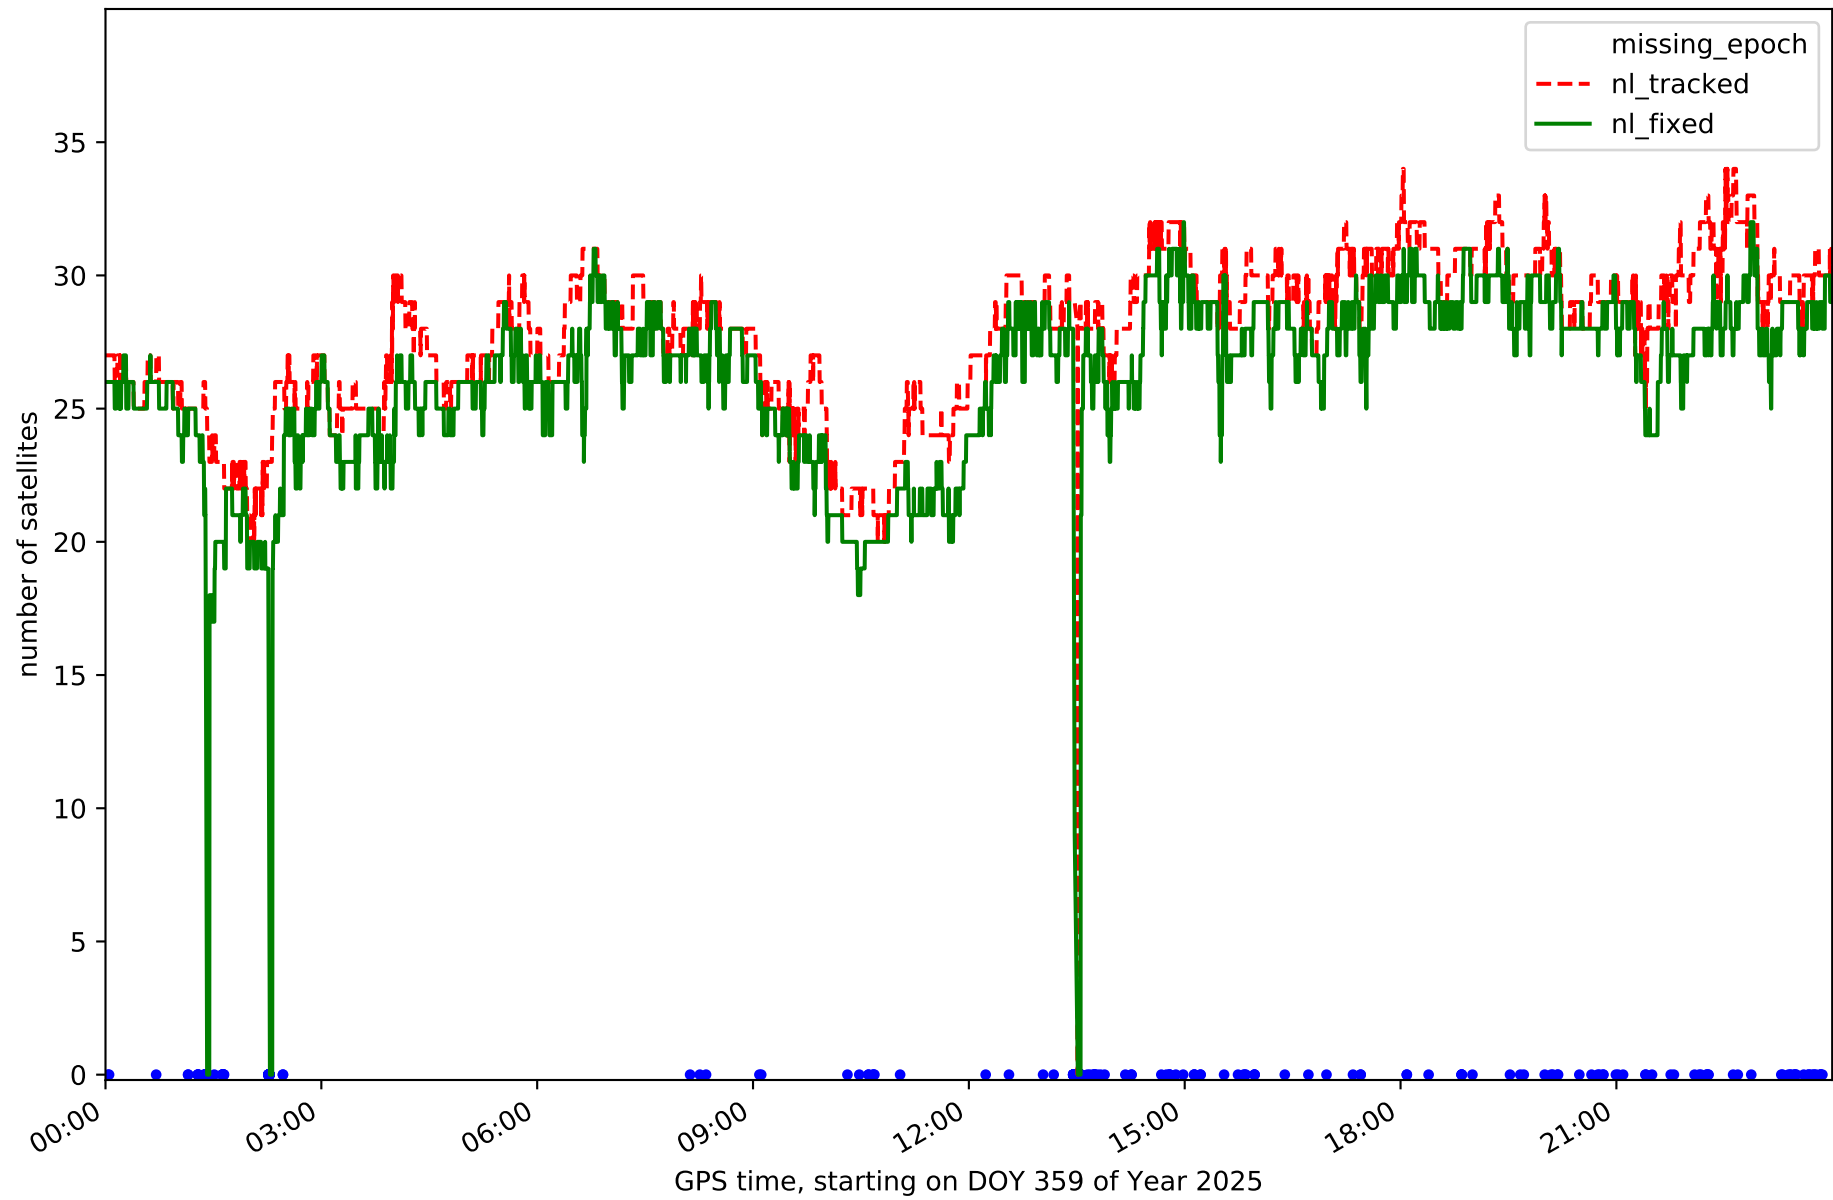


Station TN09 in network NT32

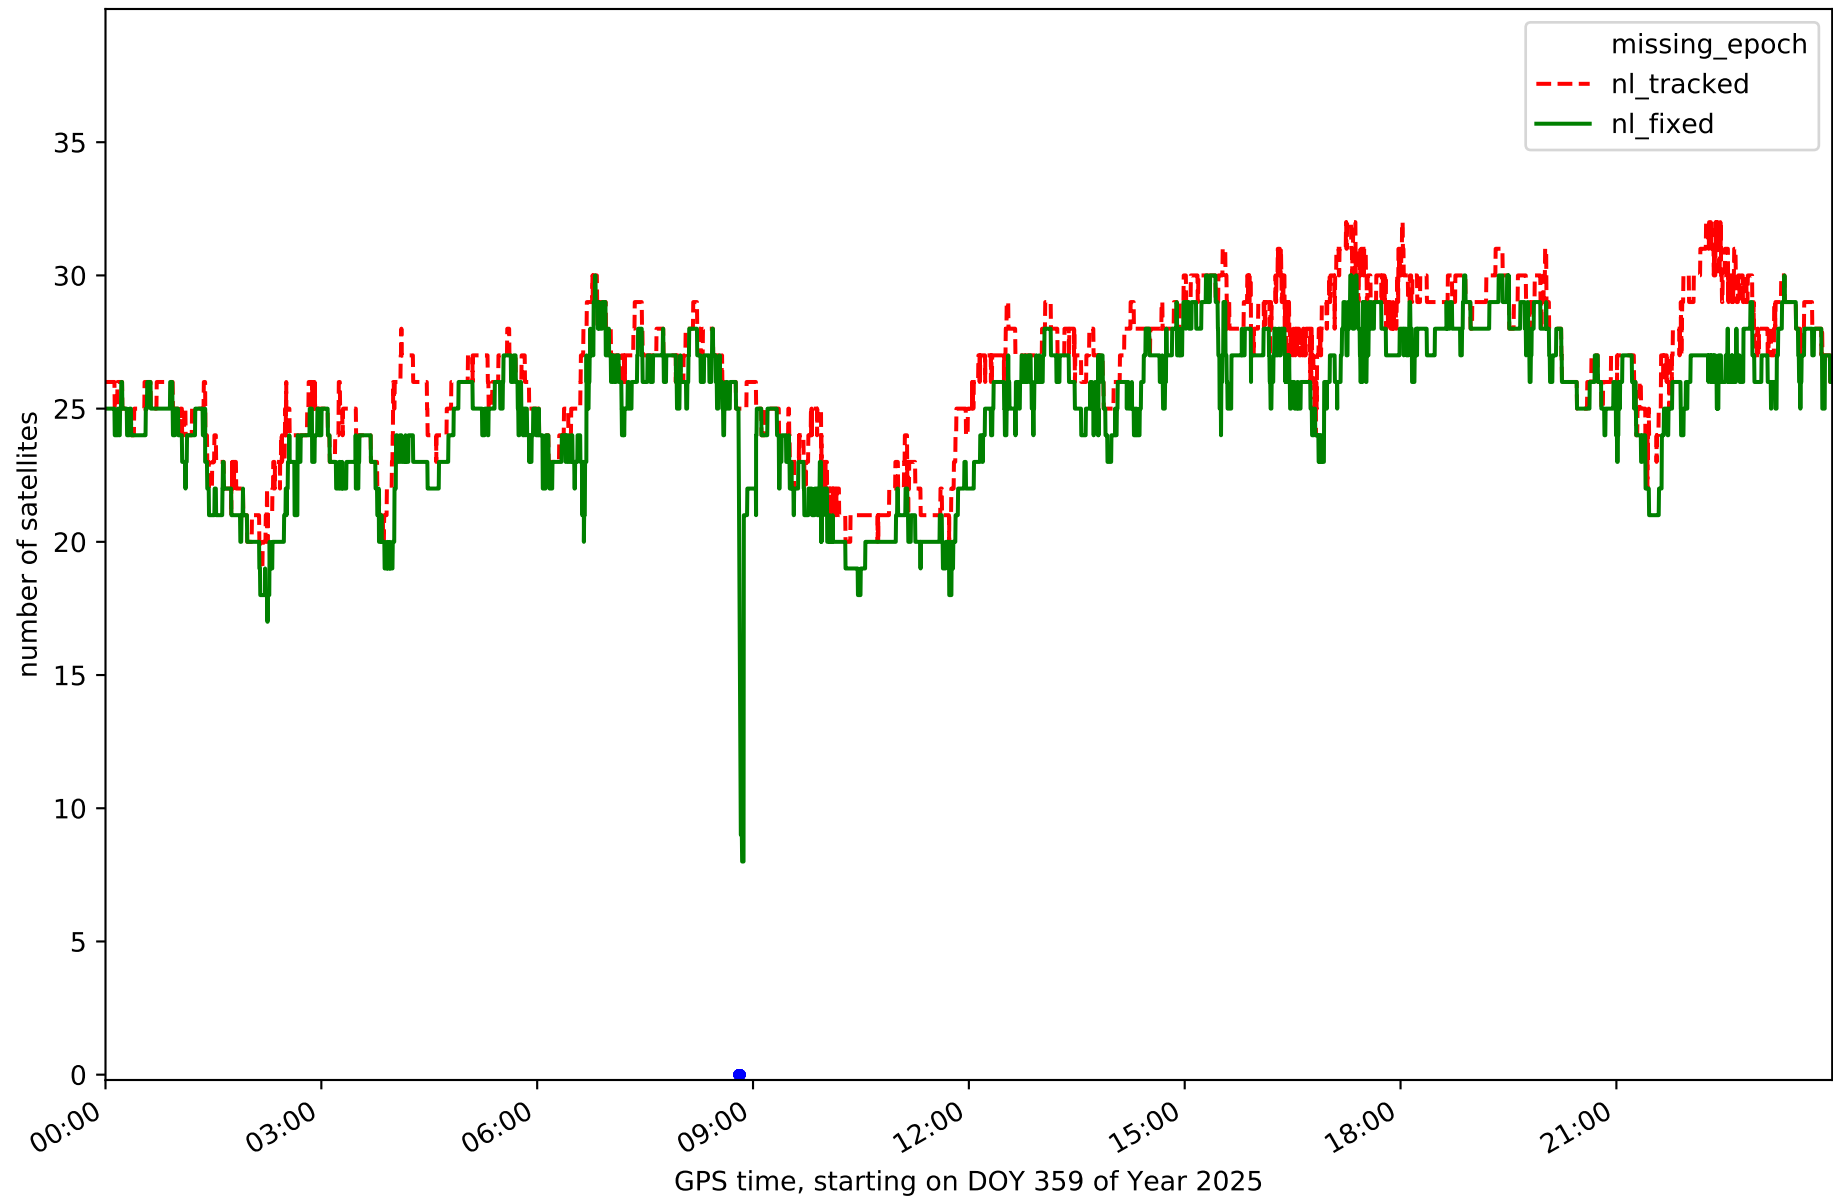


Station TE11 in network NT32

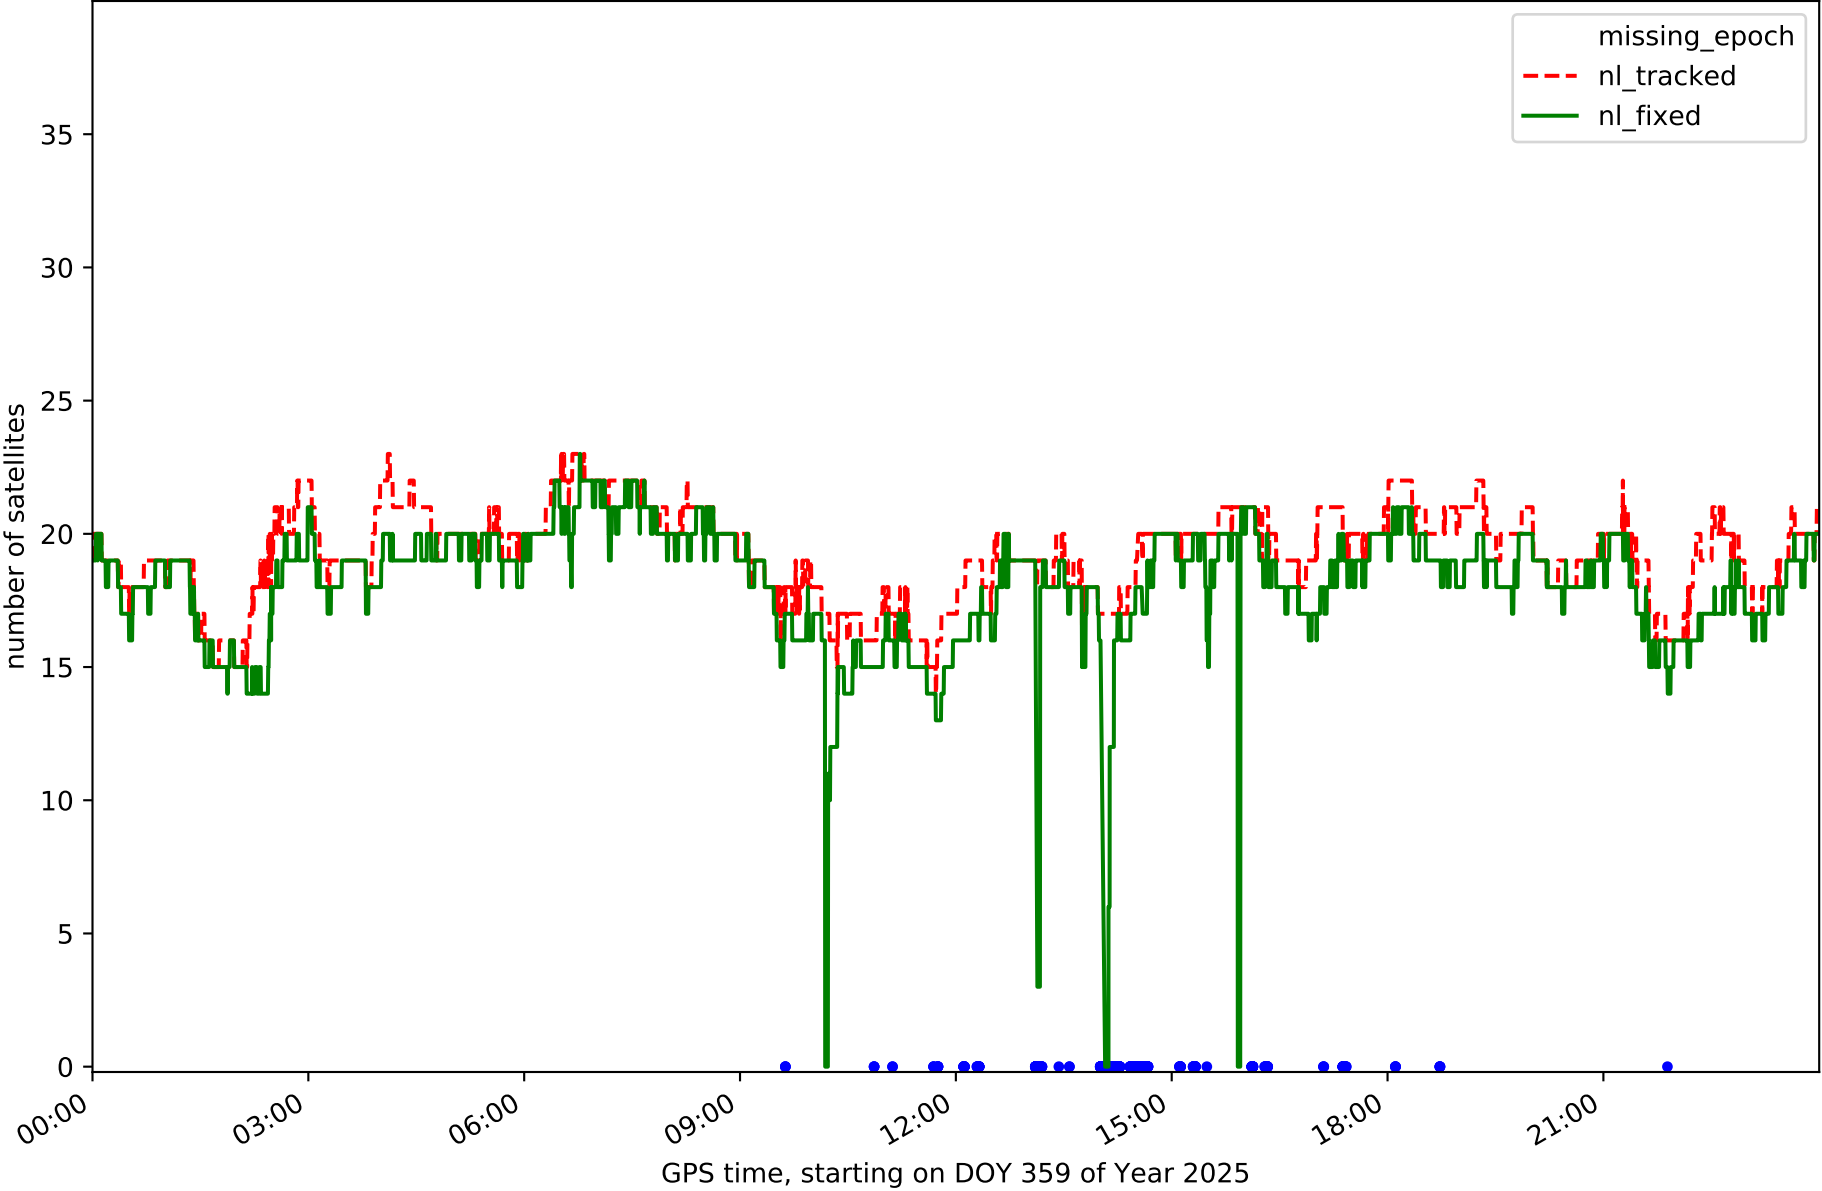


RefCheck for station EH01 in network NT32

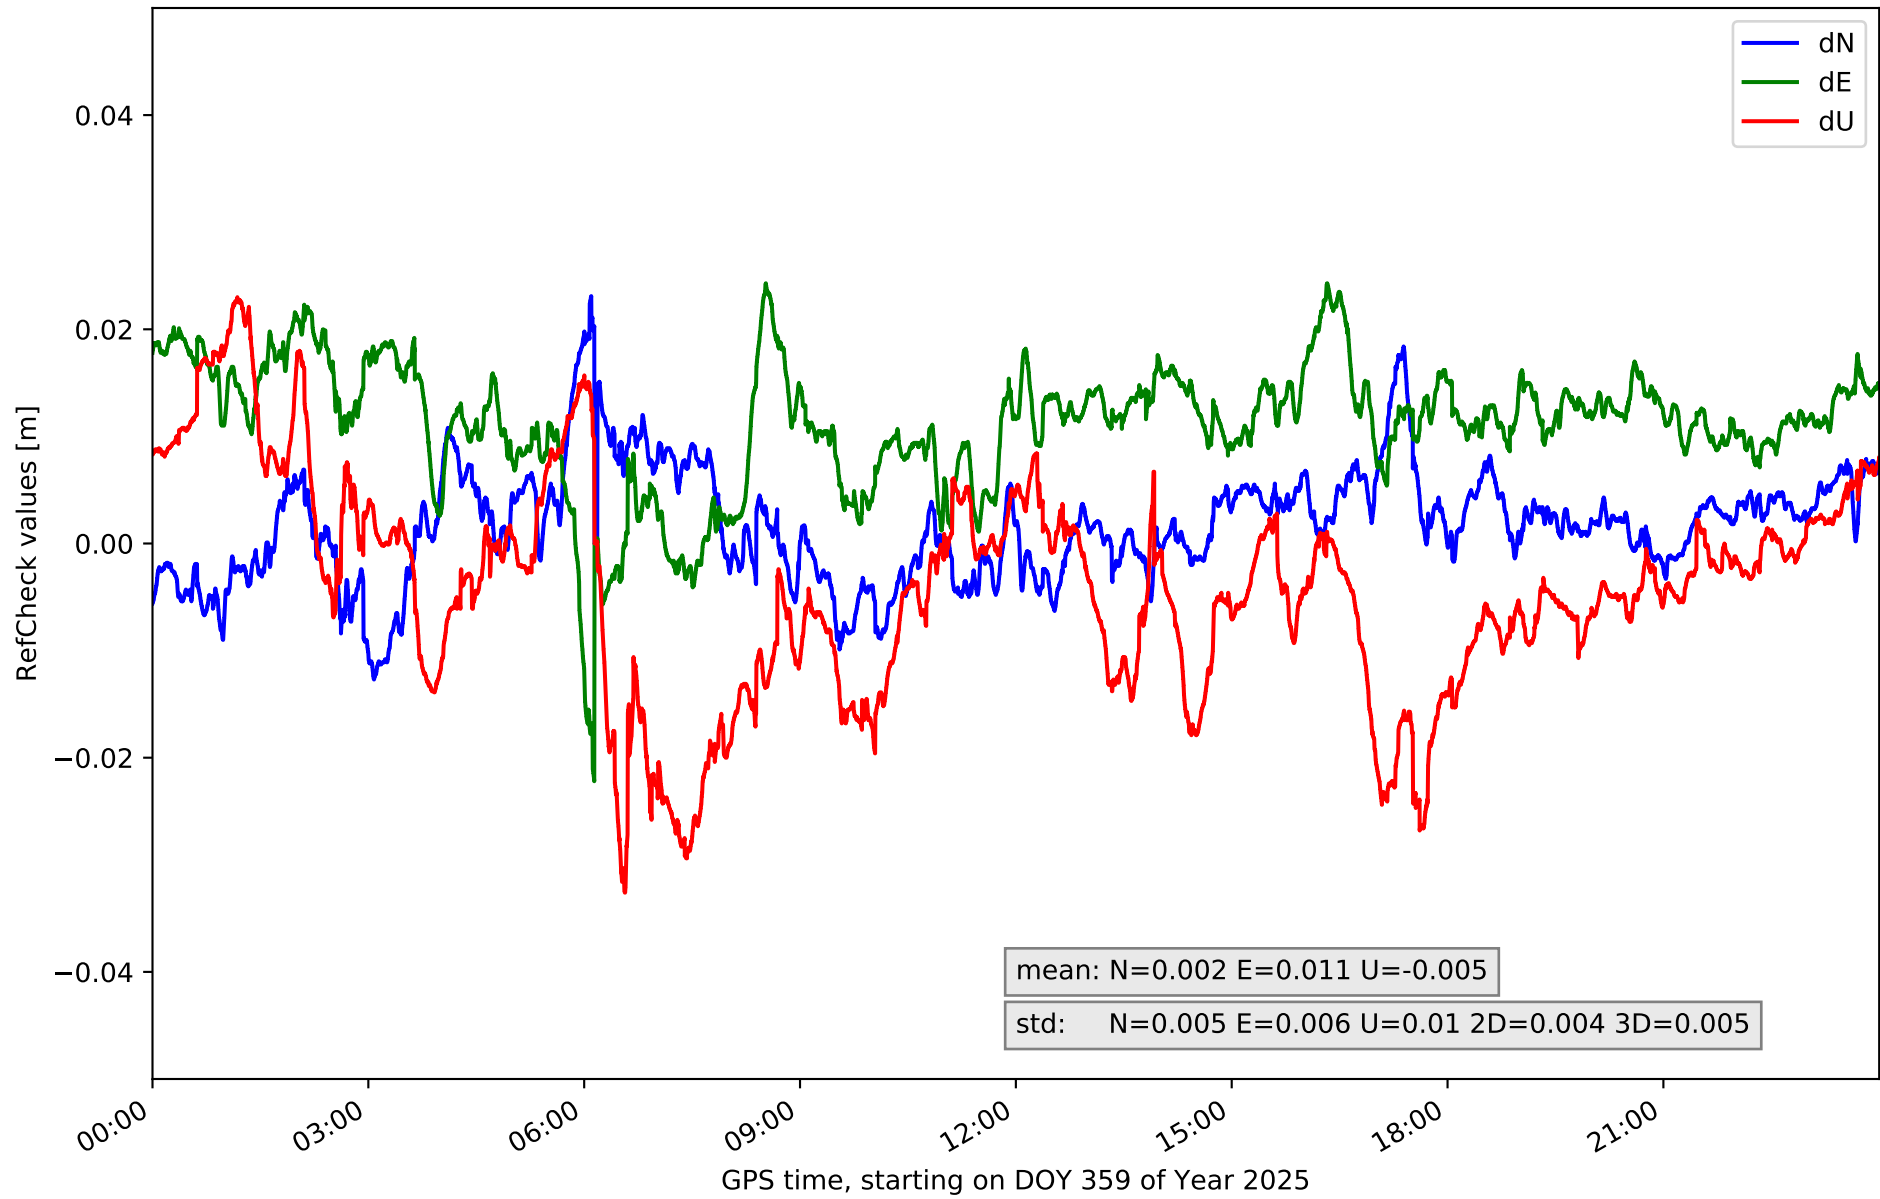


RefCheck for station EH02 in network NT32

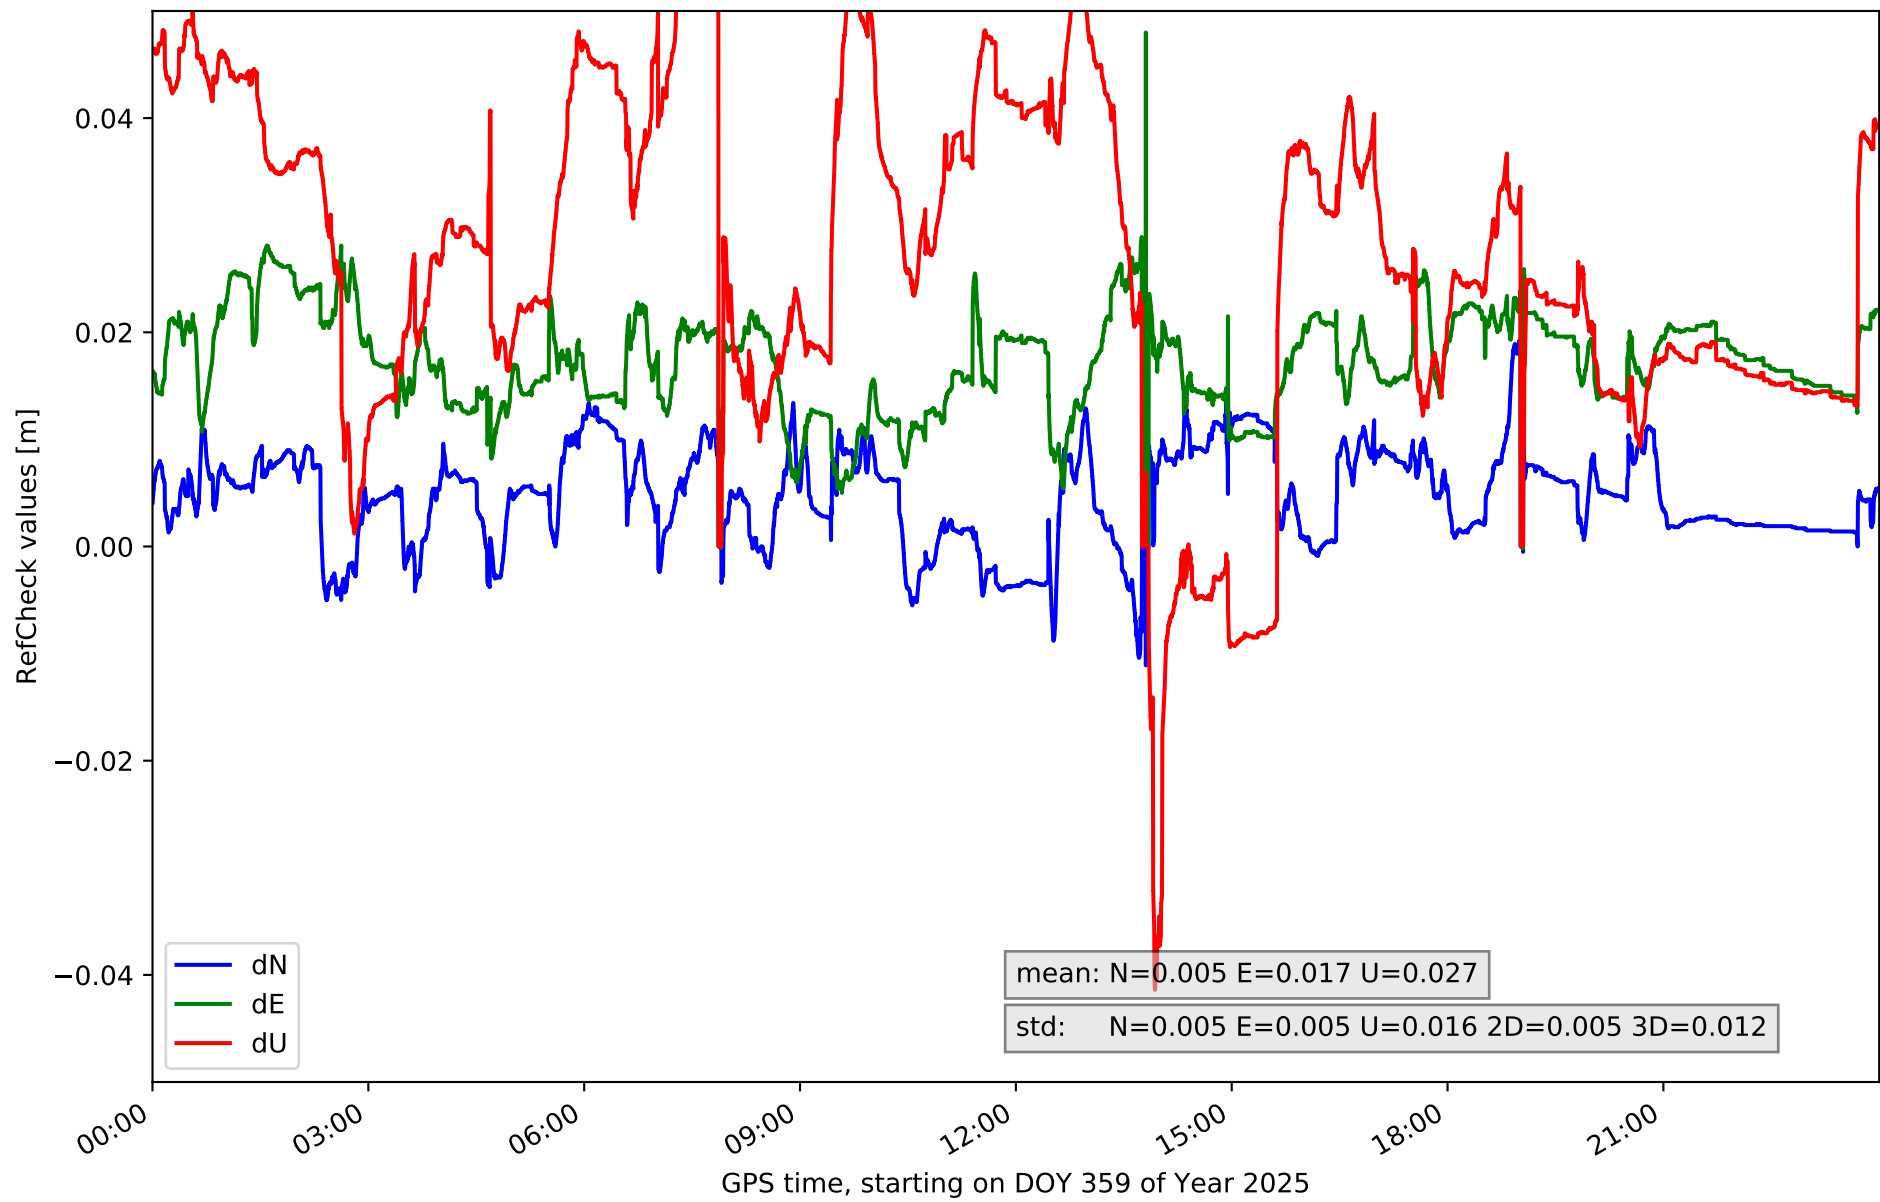


RefCheck for station GOM1 in network NT32

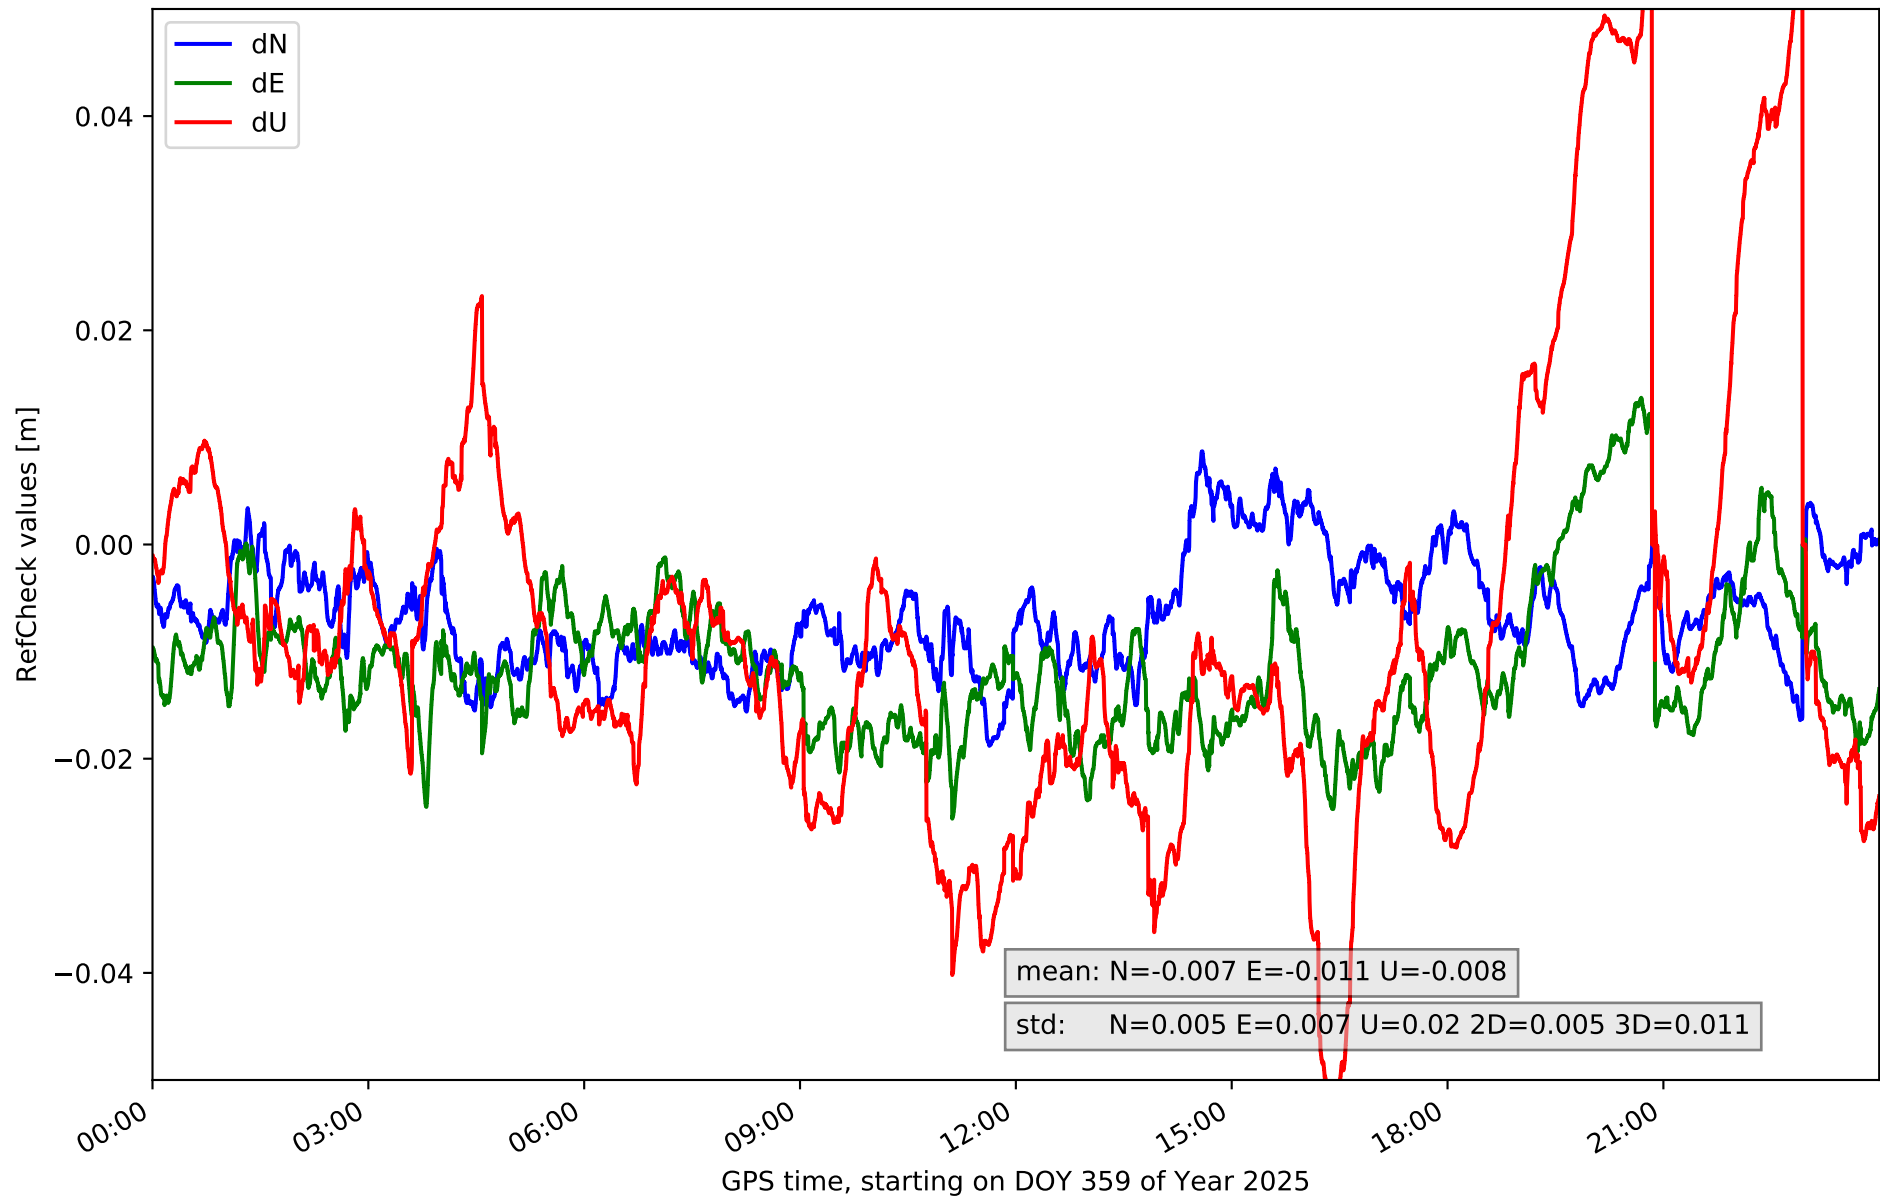


RefCheck for station GOME in network NT32

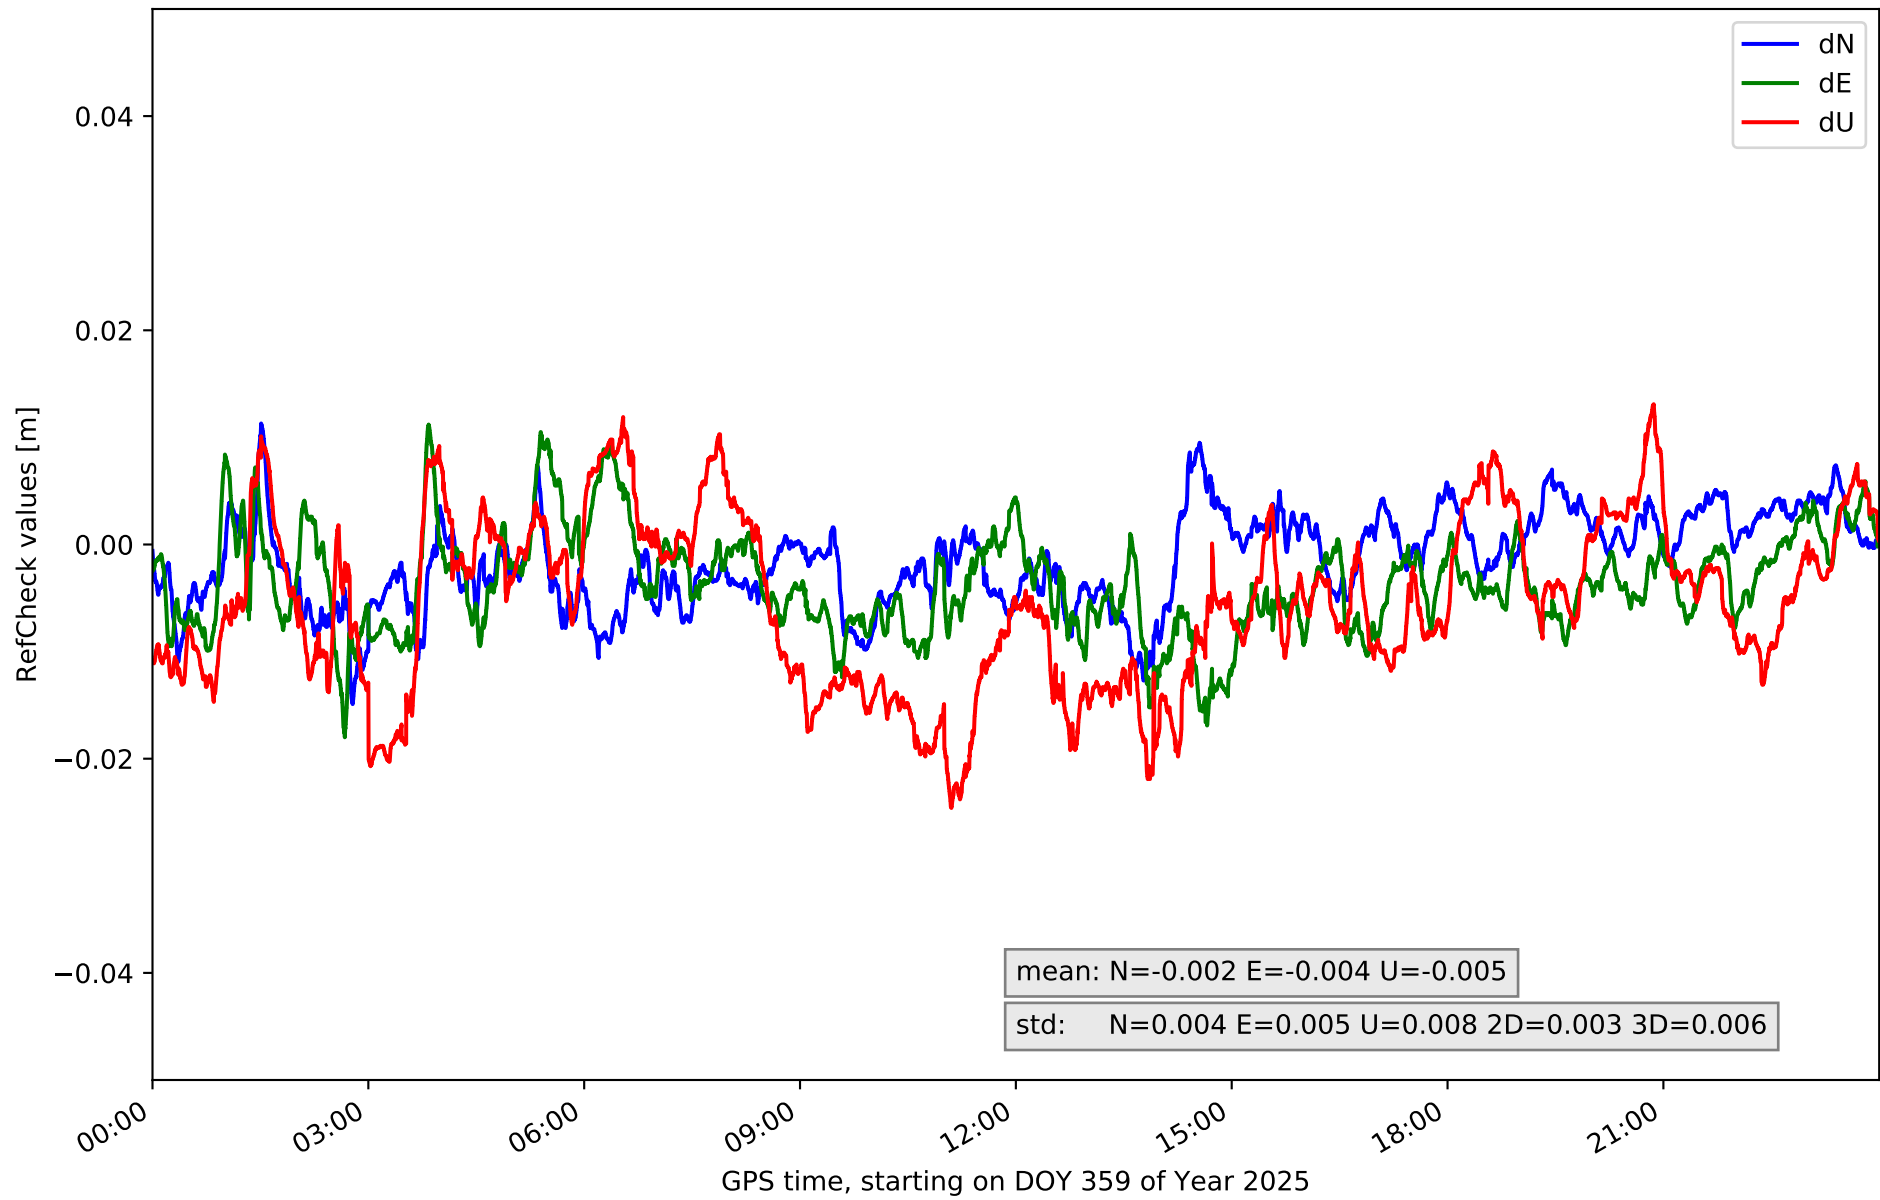


RefCheck for station IZAN in network NT32

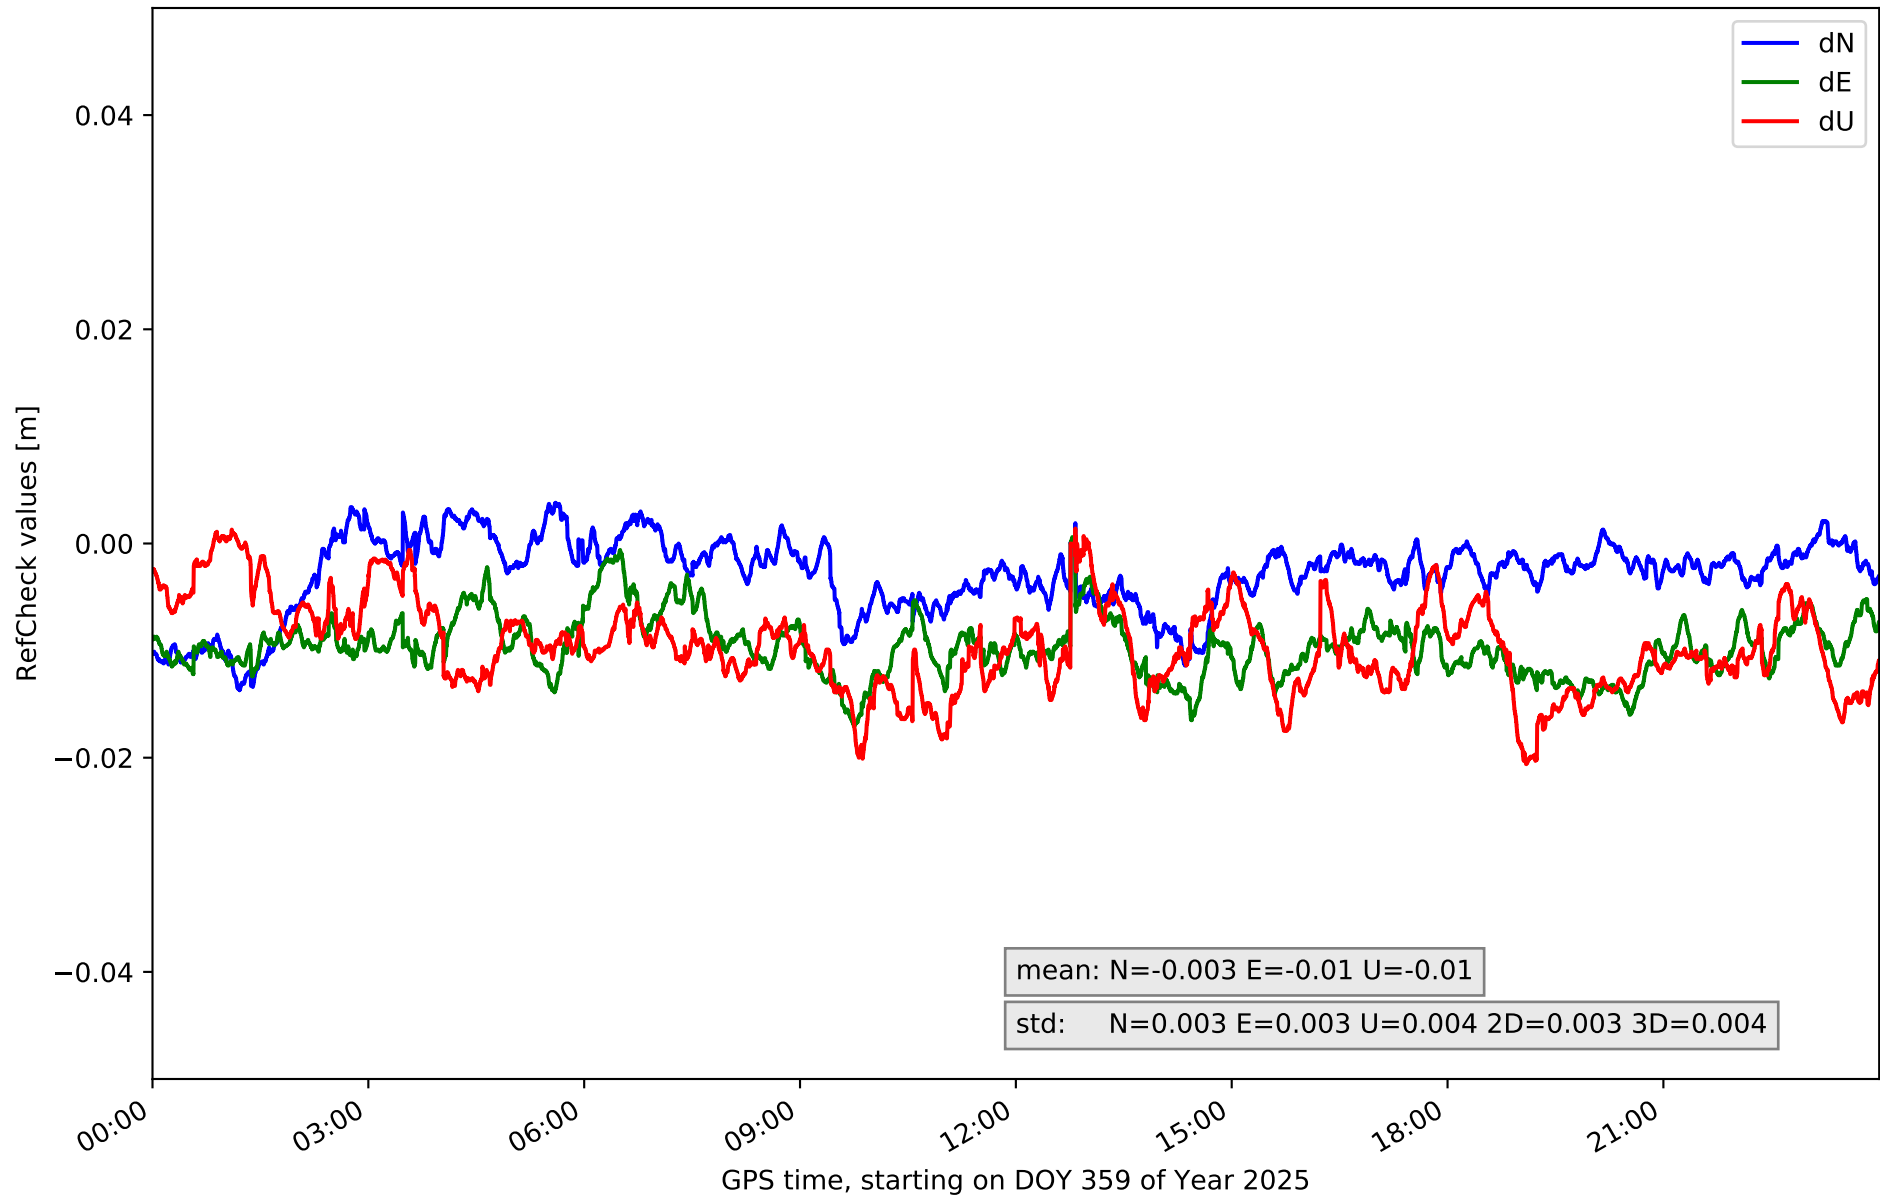


RefCheck for station LP01 in network NT32

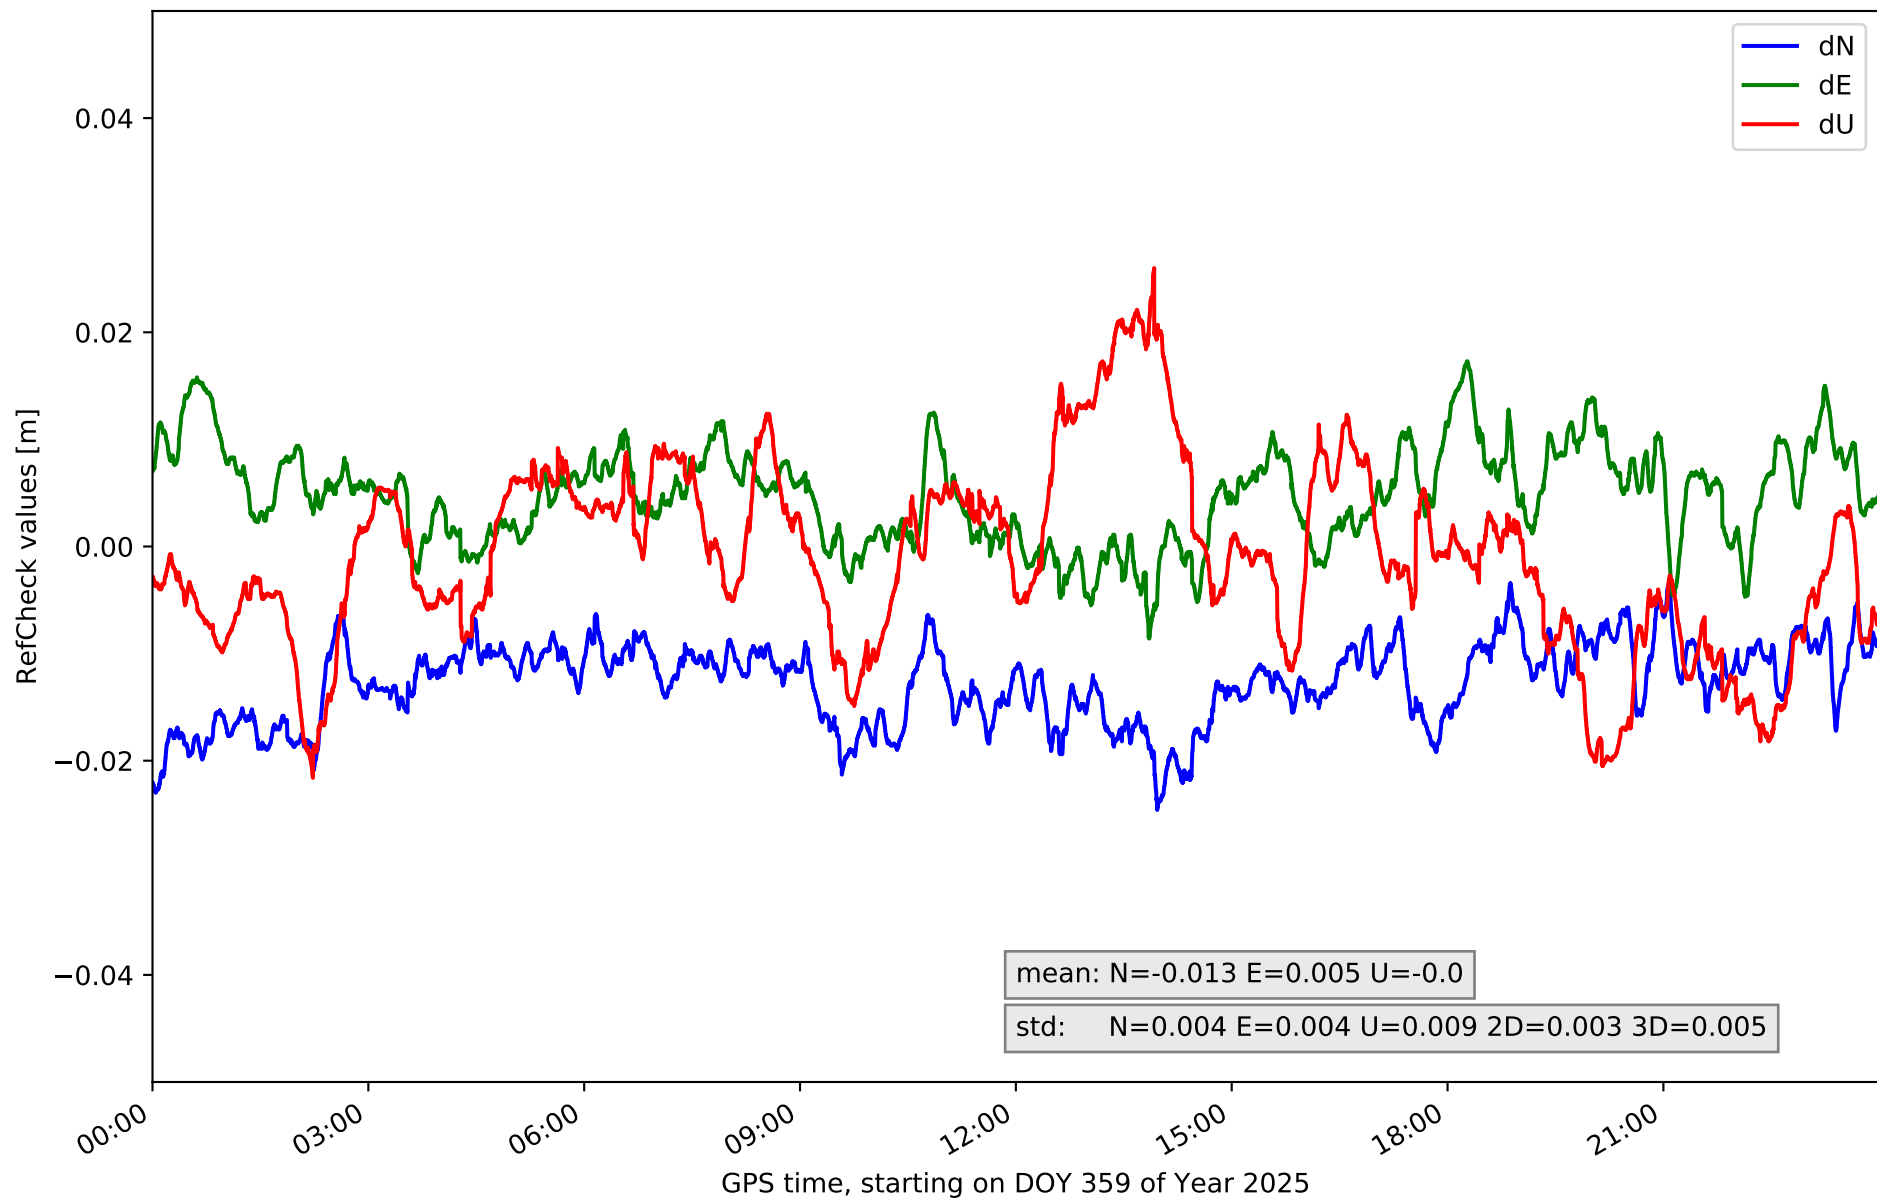


RefCheck for station LP03 in network NT32

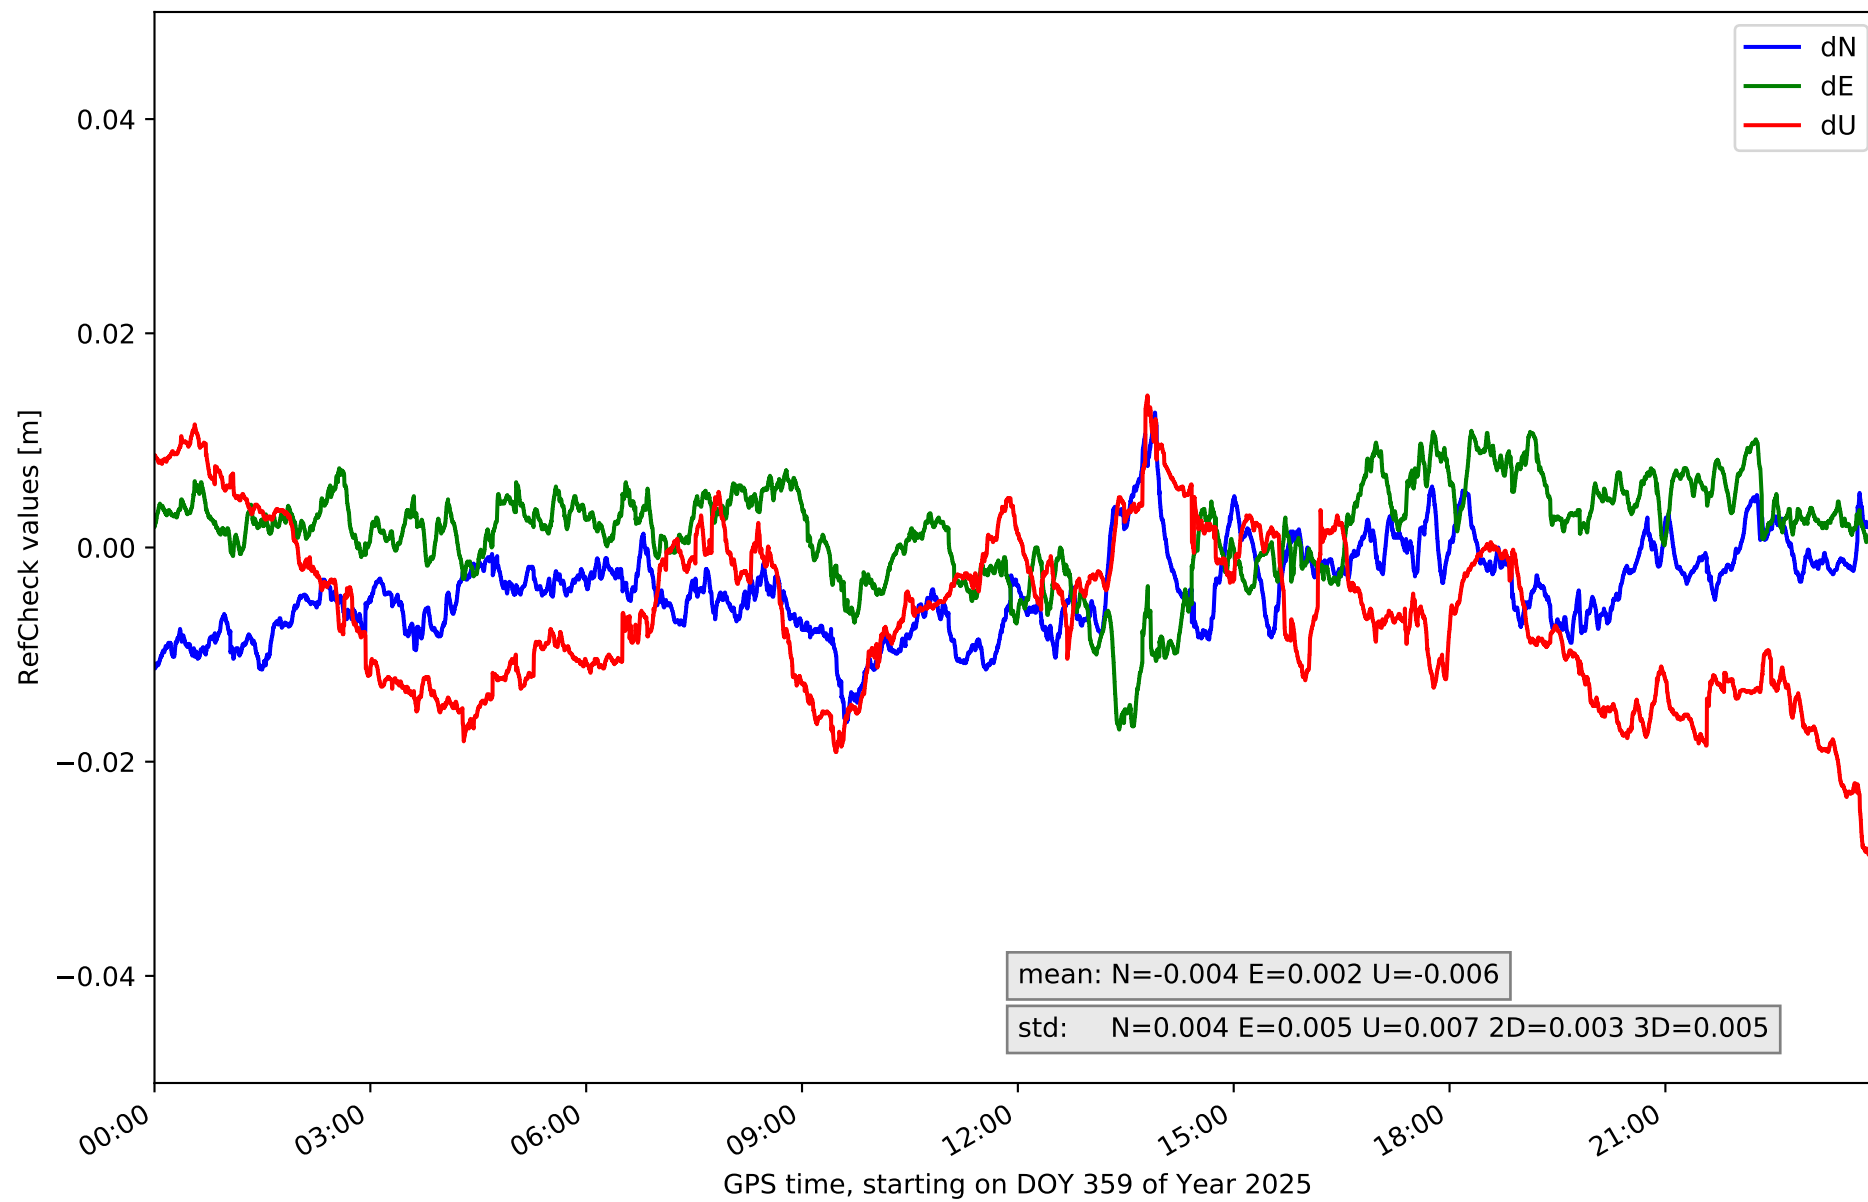


RefCheck for station LPAL in network NT32

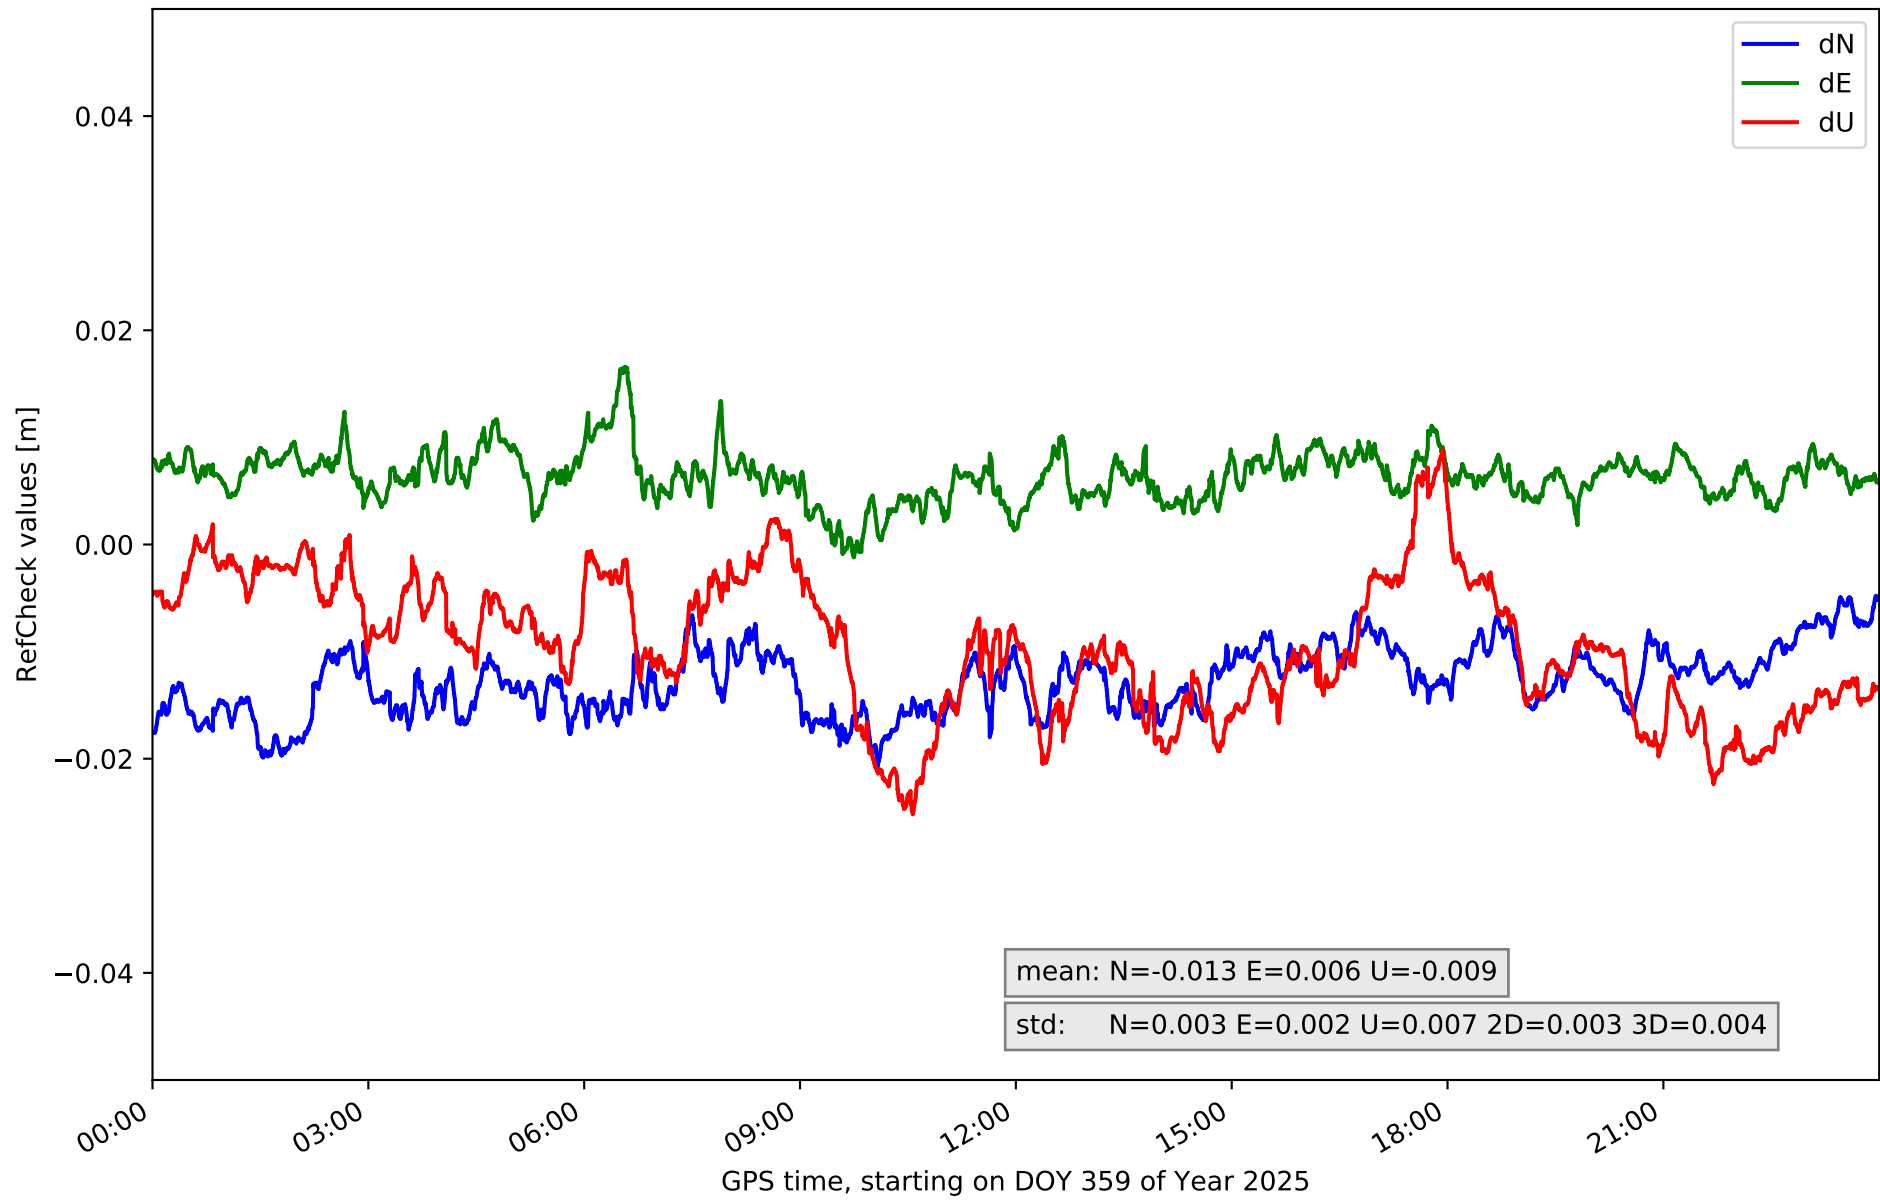


RefCheck for station LRES in network NT32

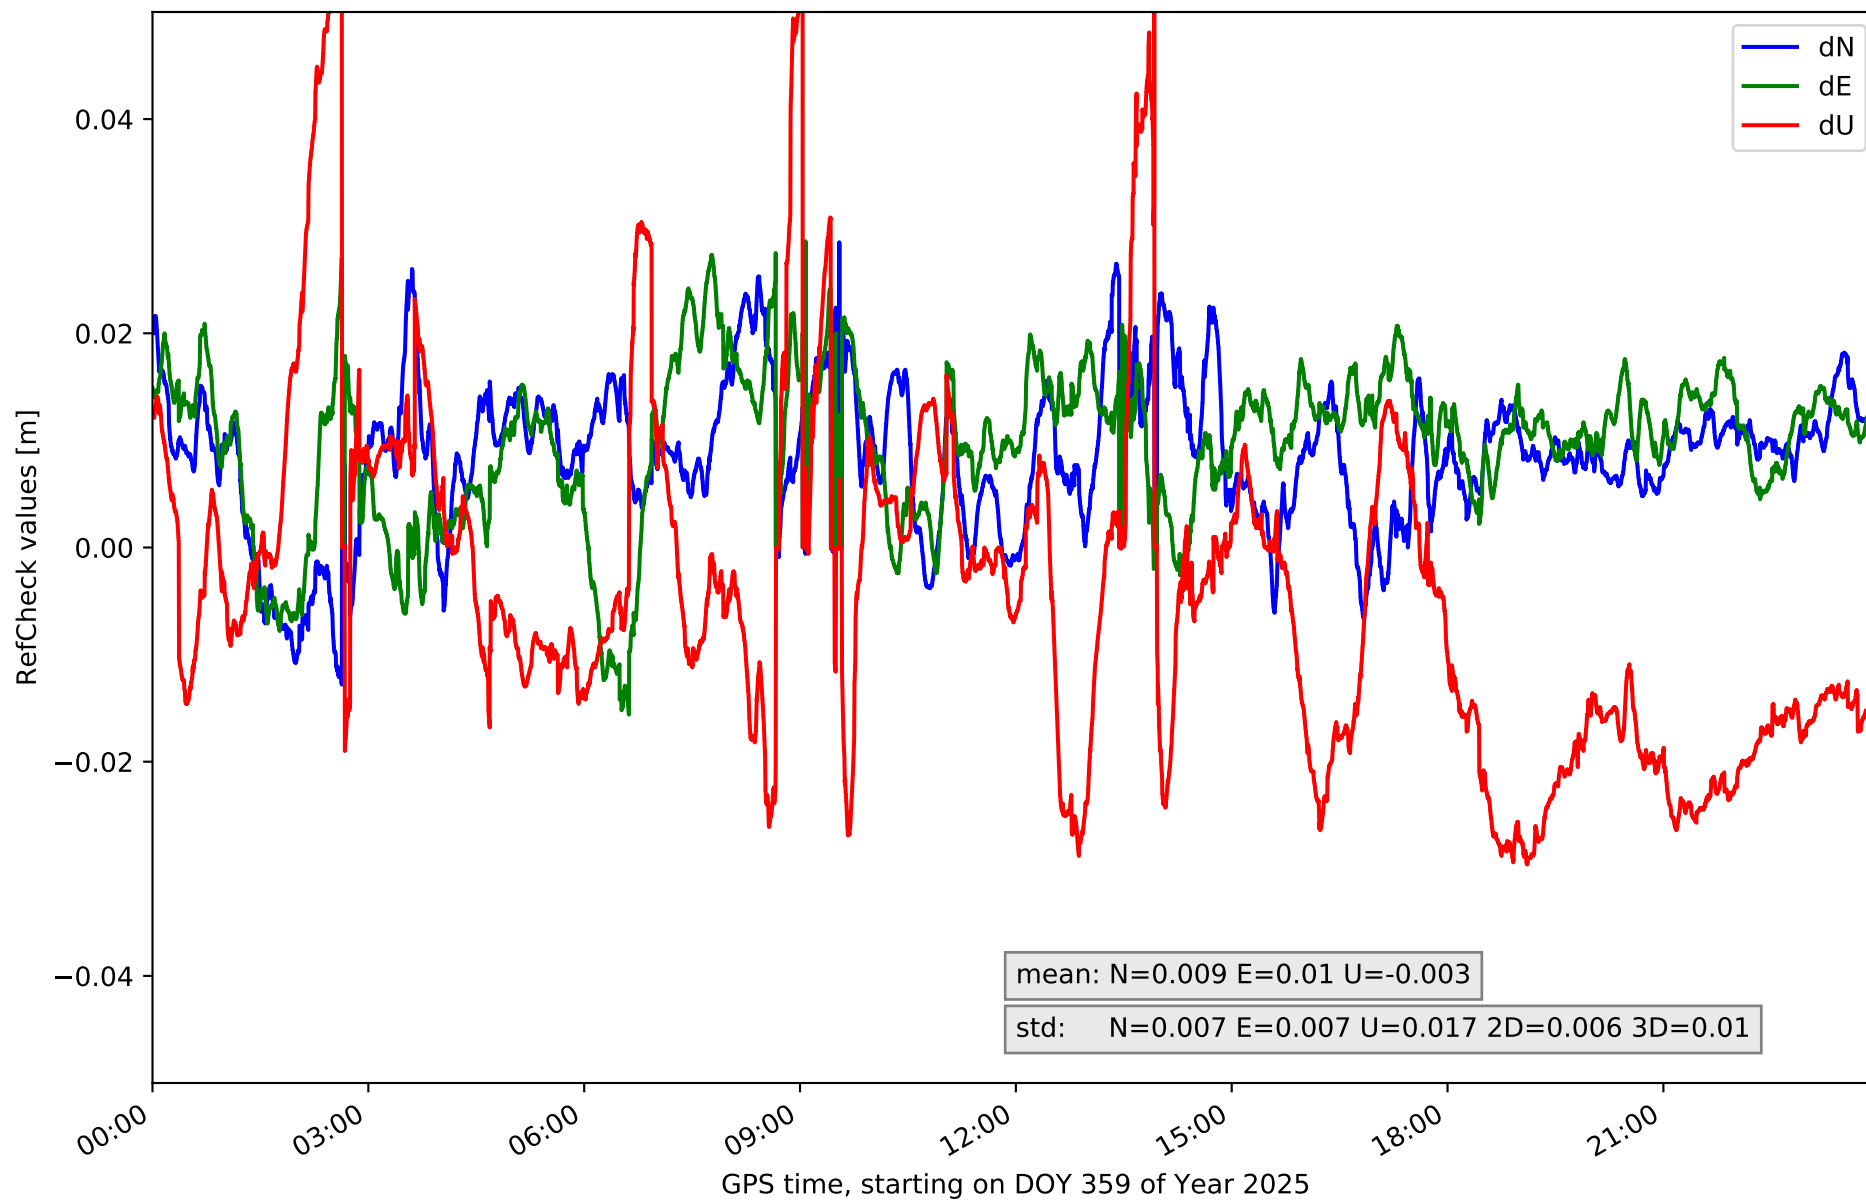


RefCheck for station TN01 in network NT32

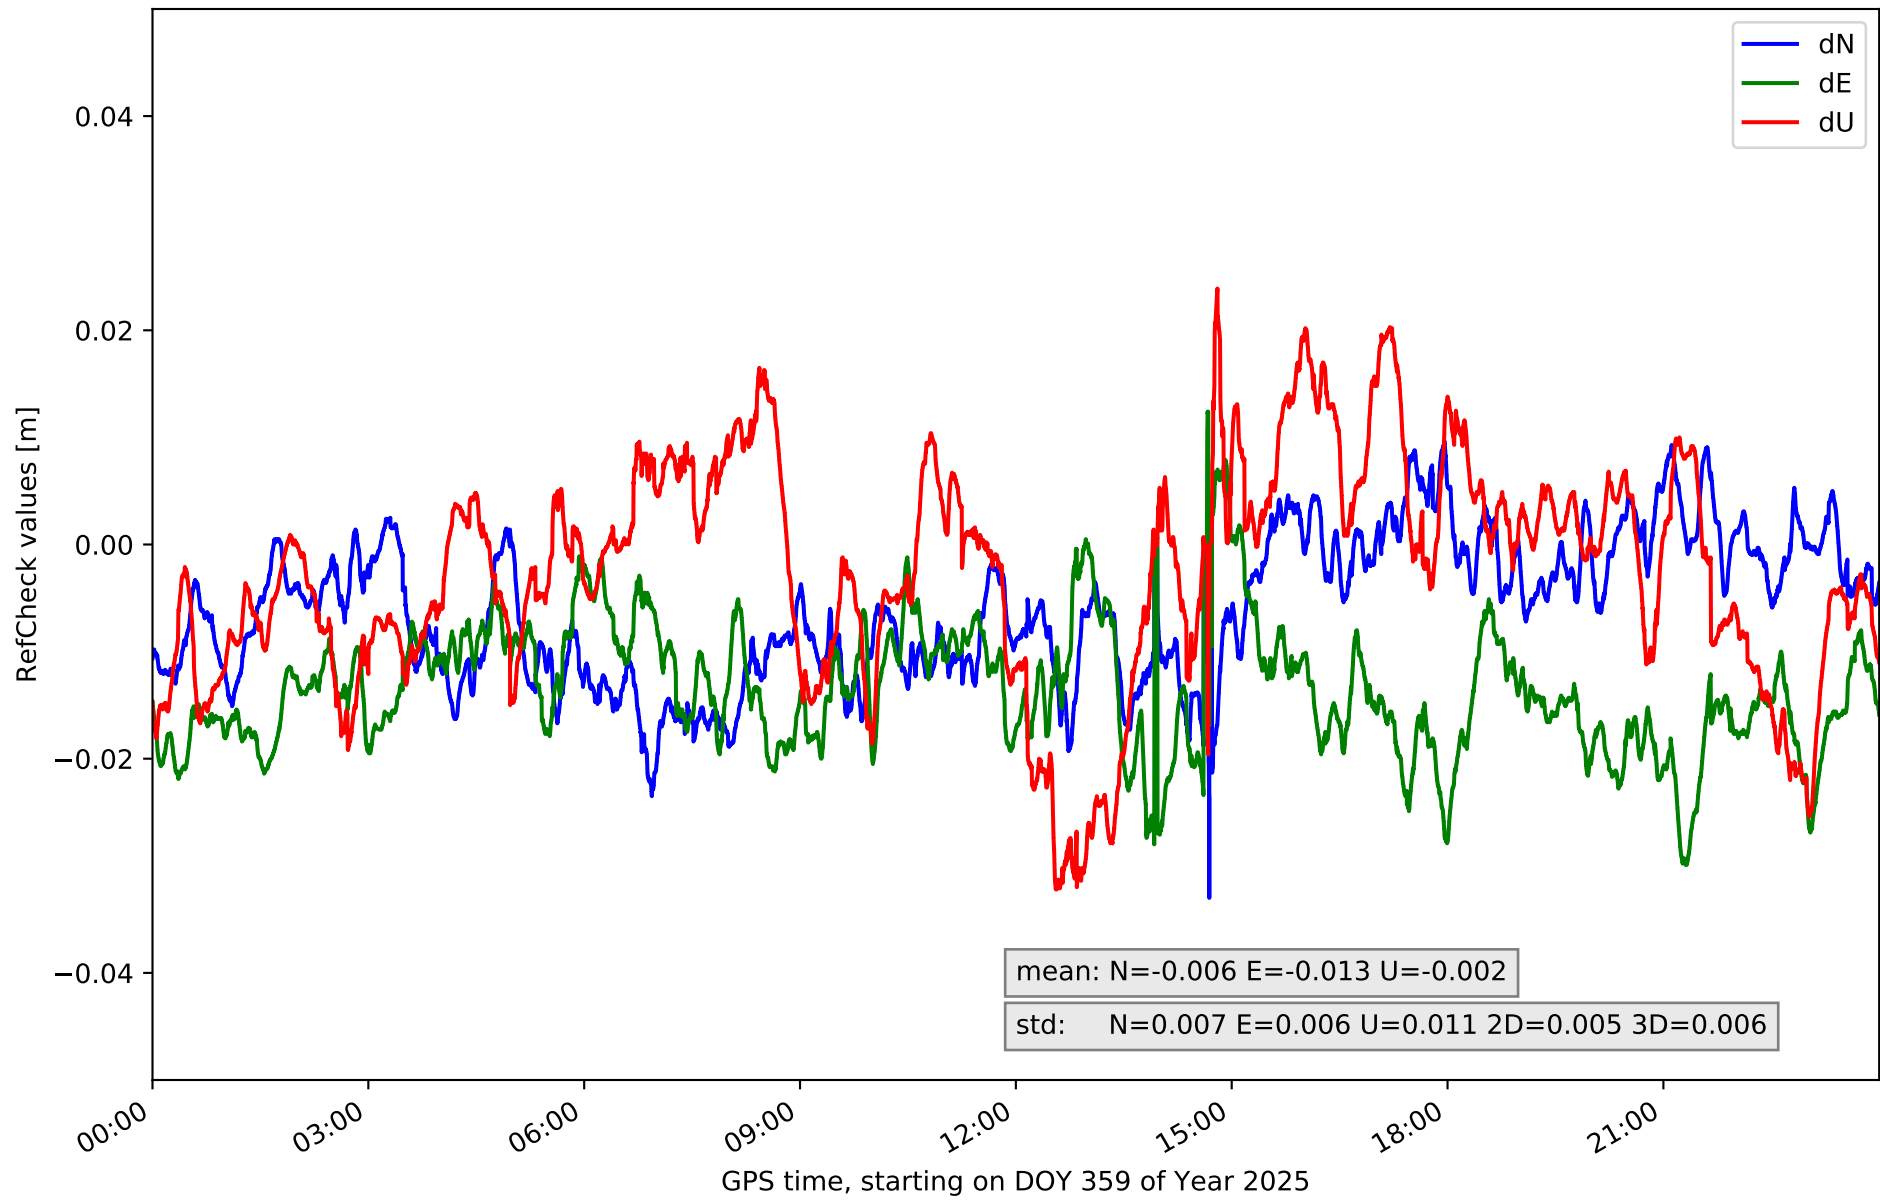


RefCheck for station TN02 in network NT32

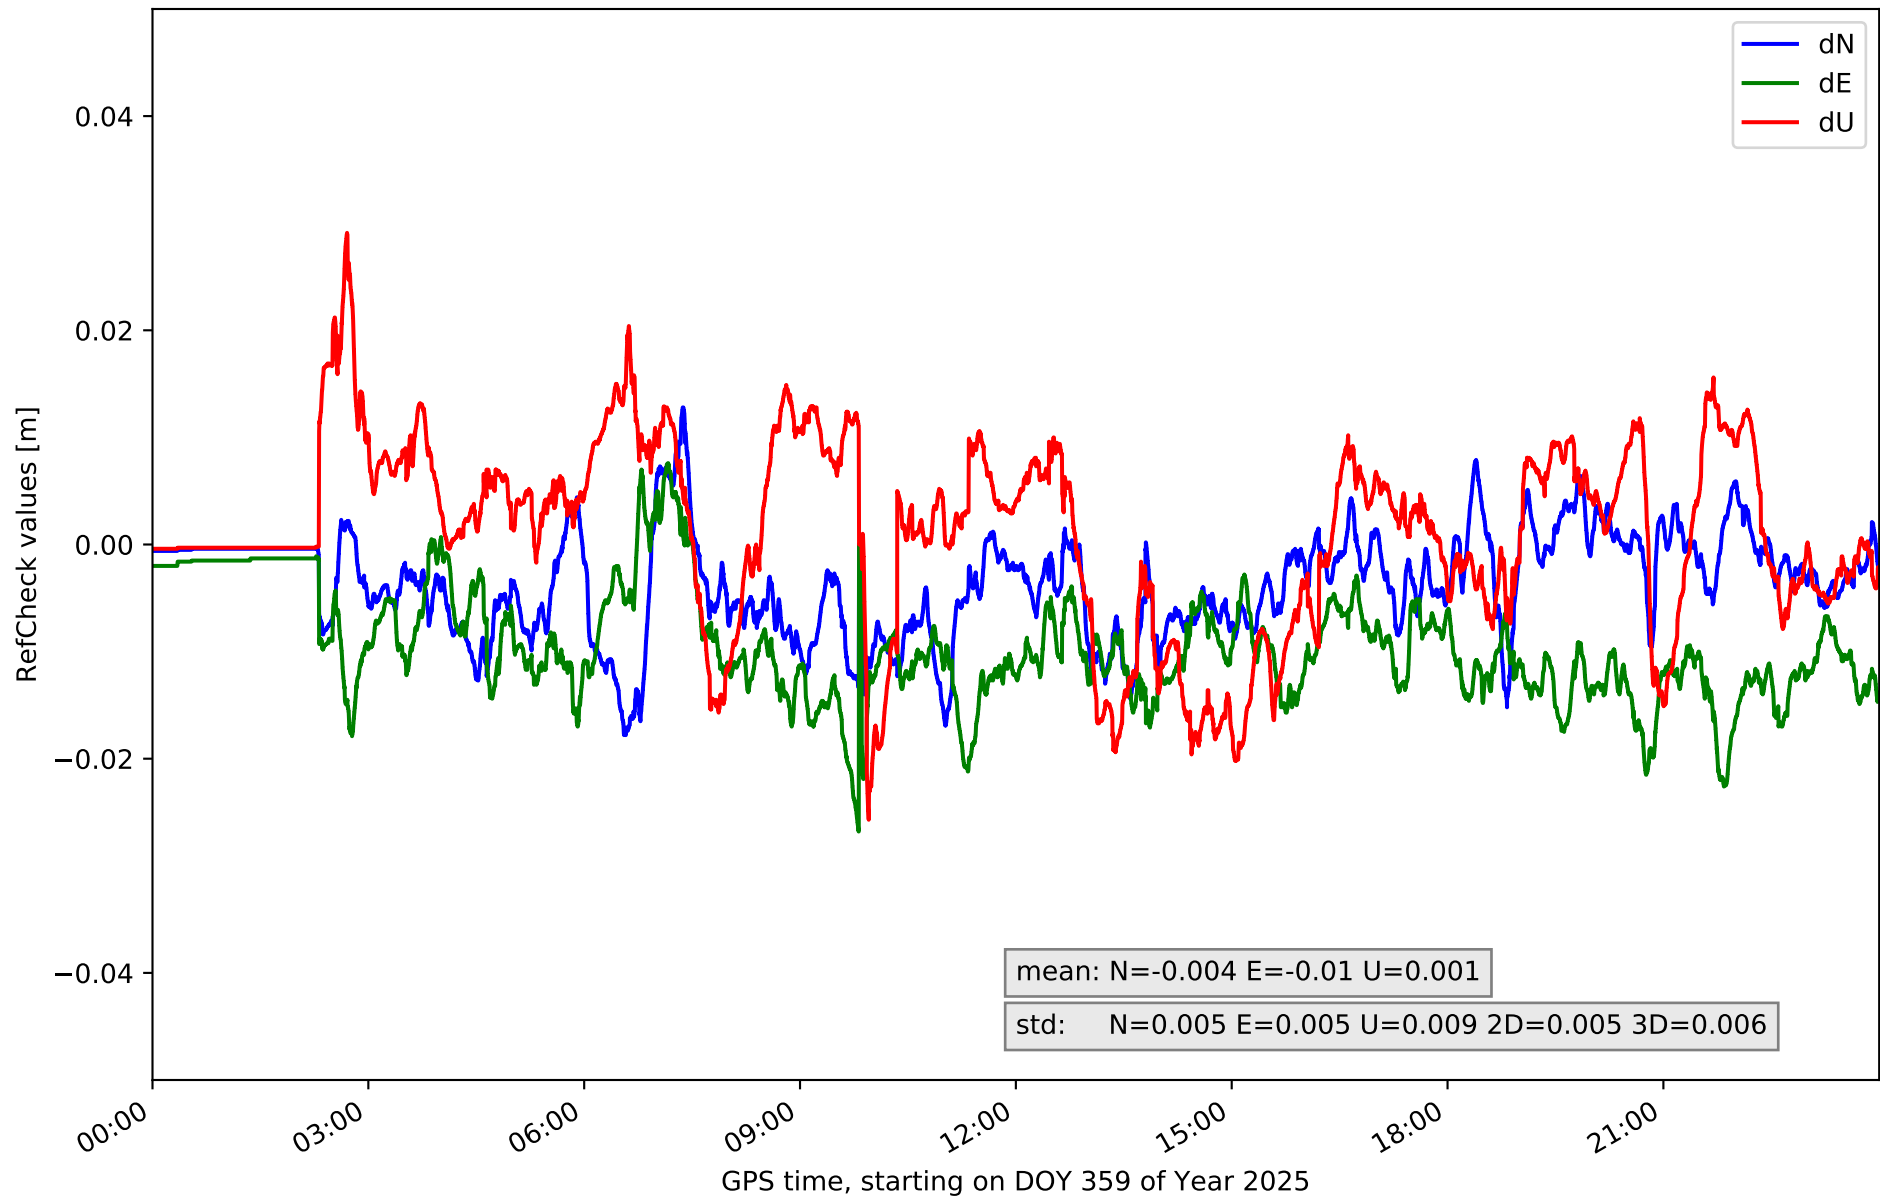


RefCheck for station TN03 in network NT32

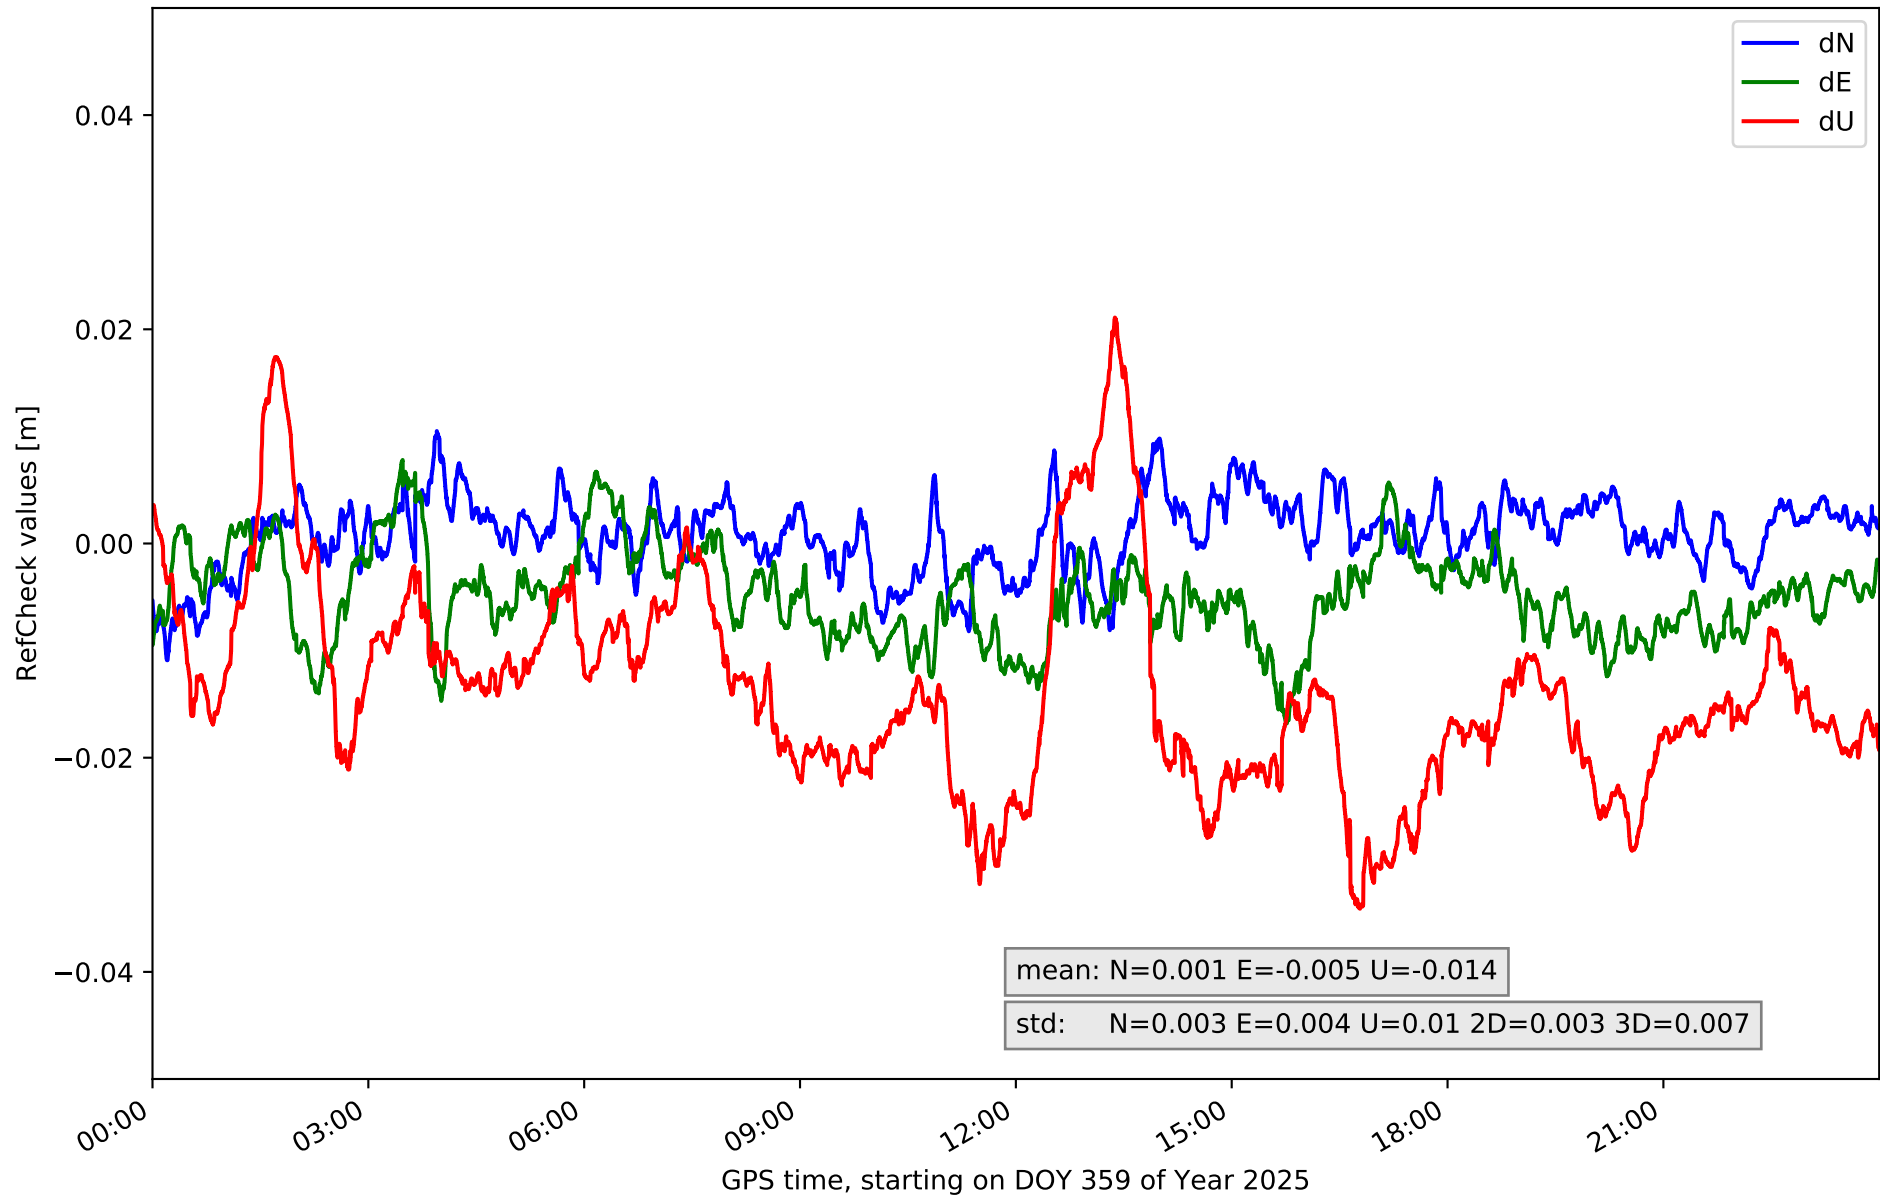


RefCheck for station TN06 in network NT32

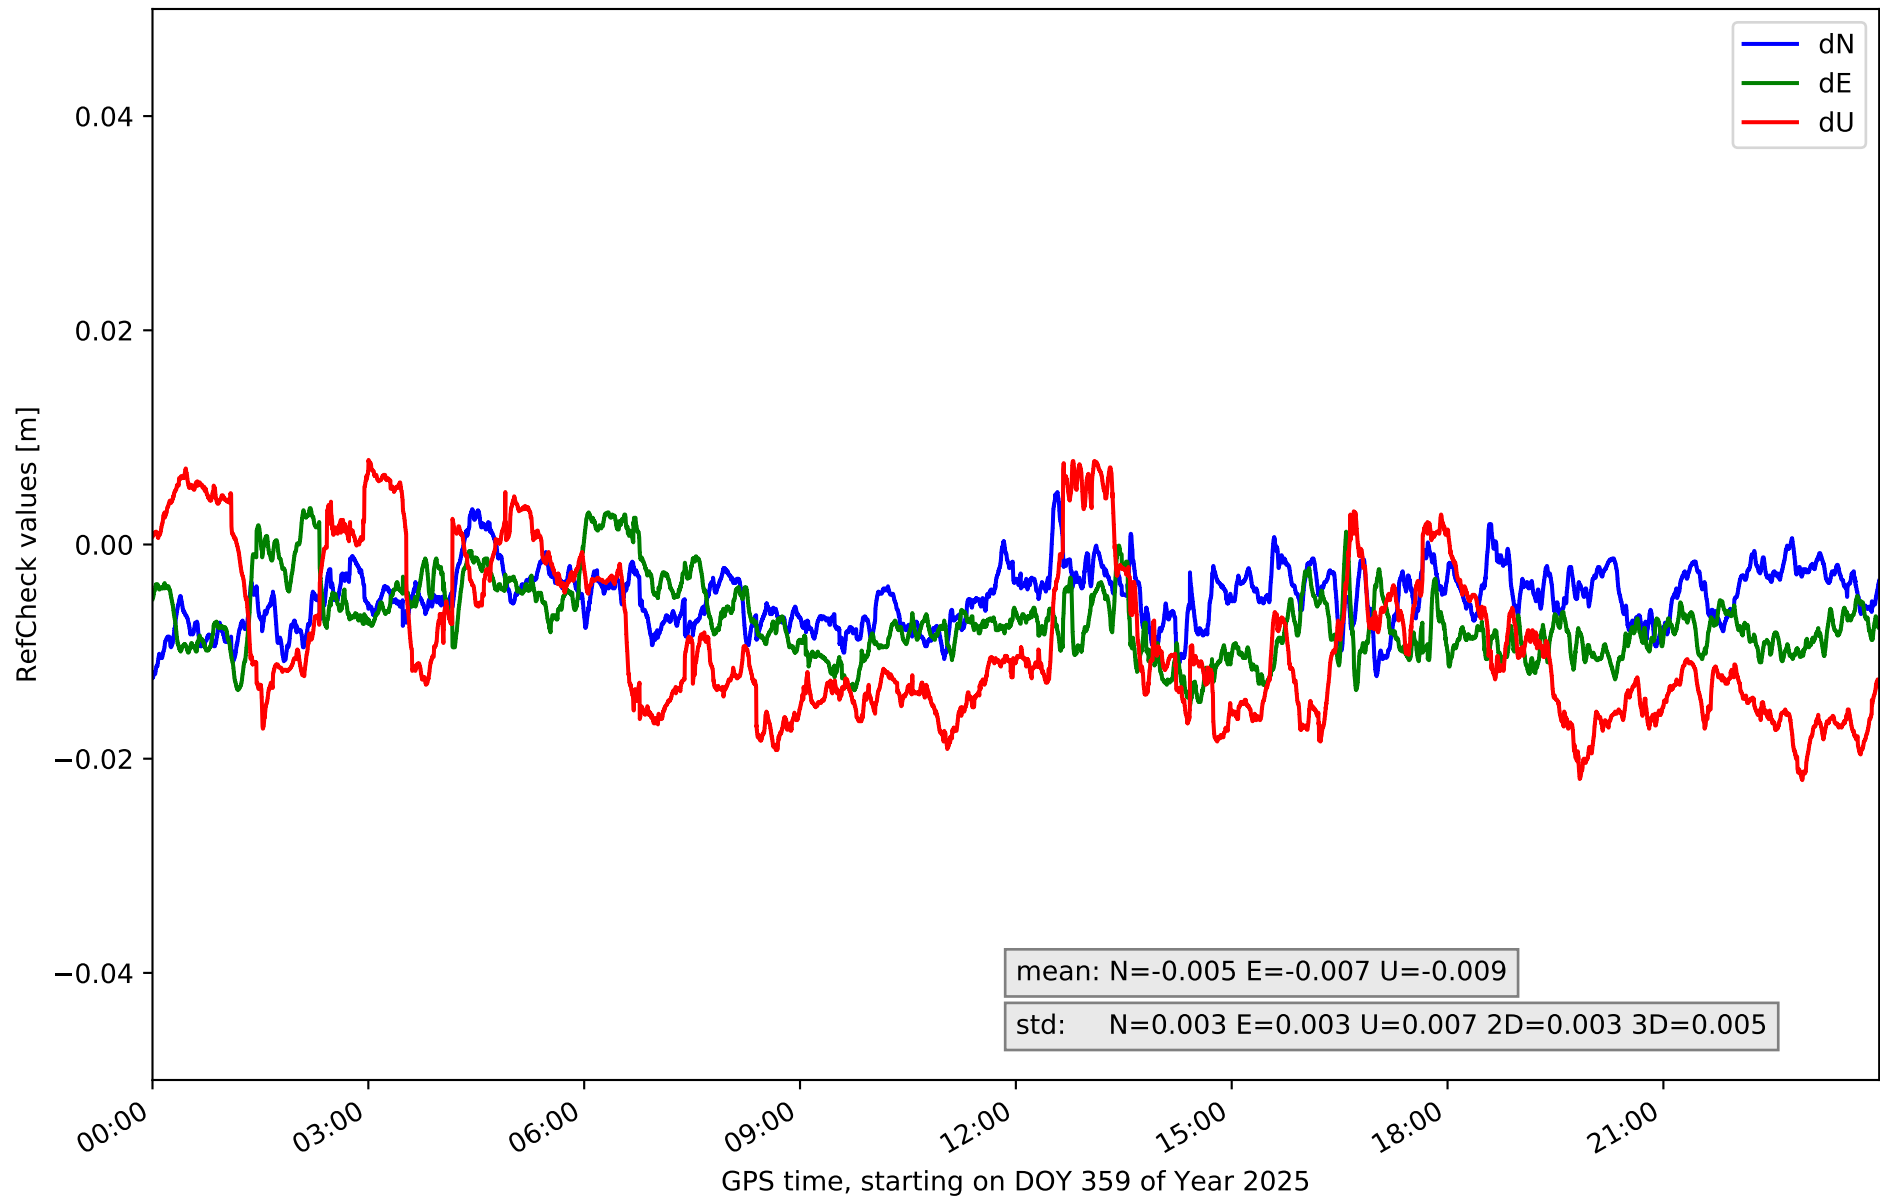

RefCheck for station TN09 in network NT32

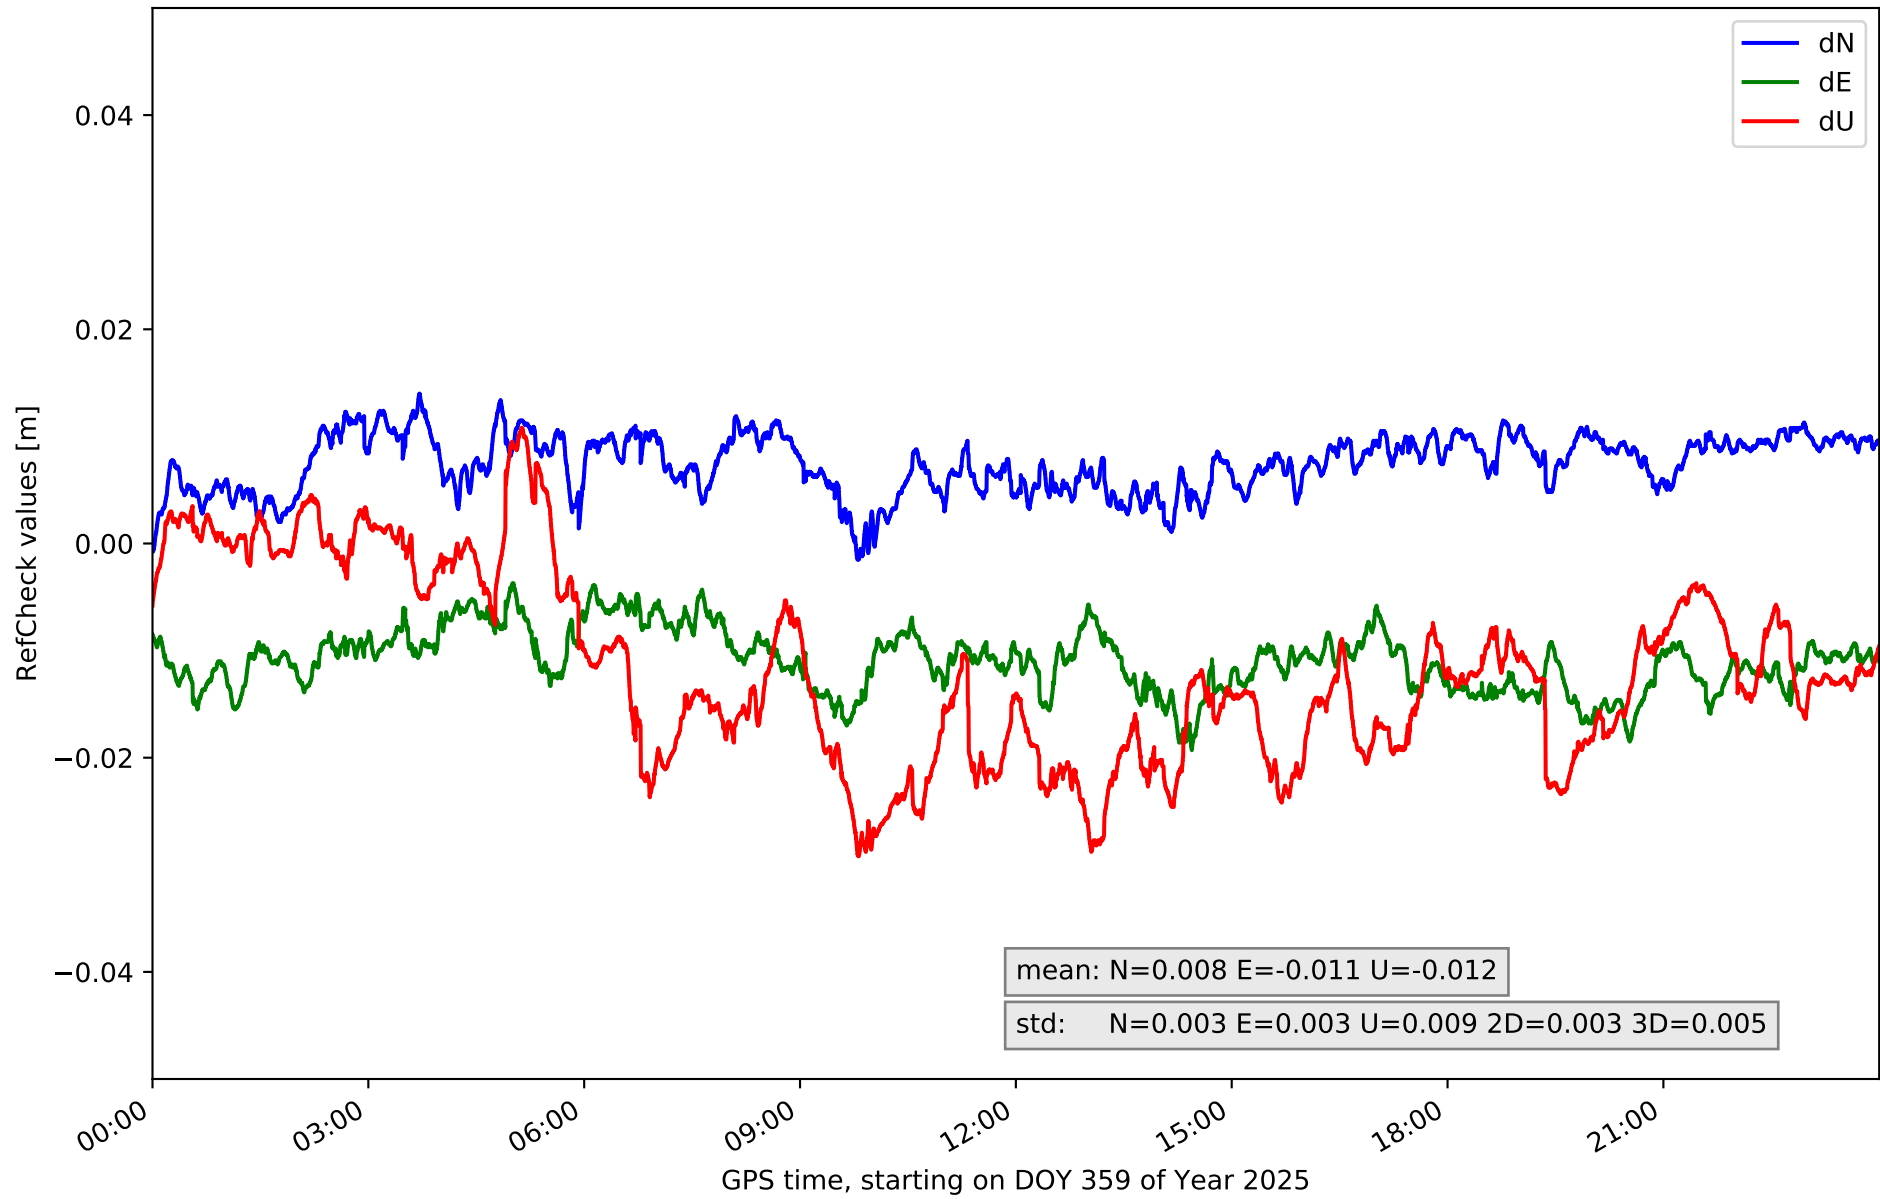

RefCheck for station TE11 in network NT32

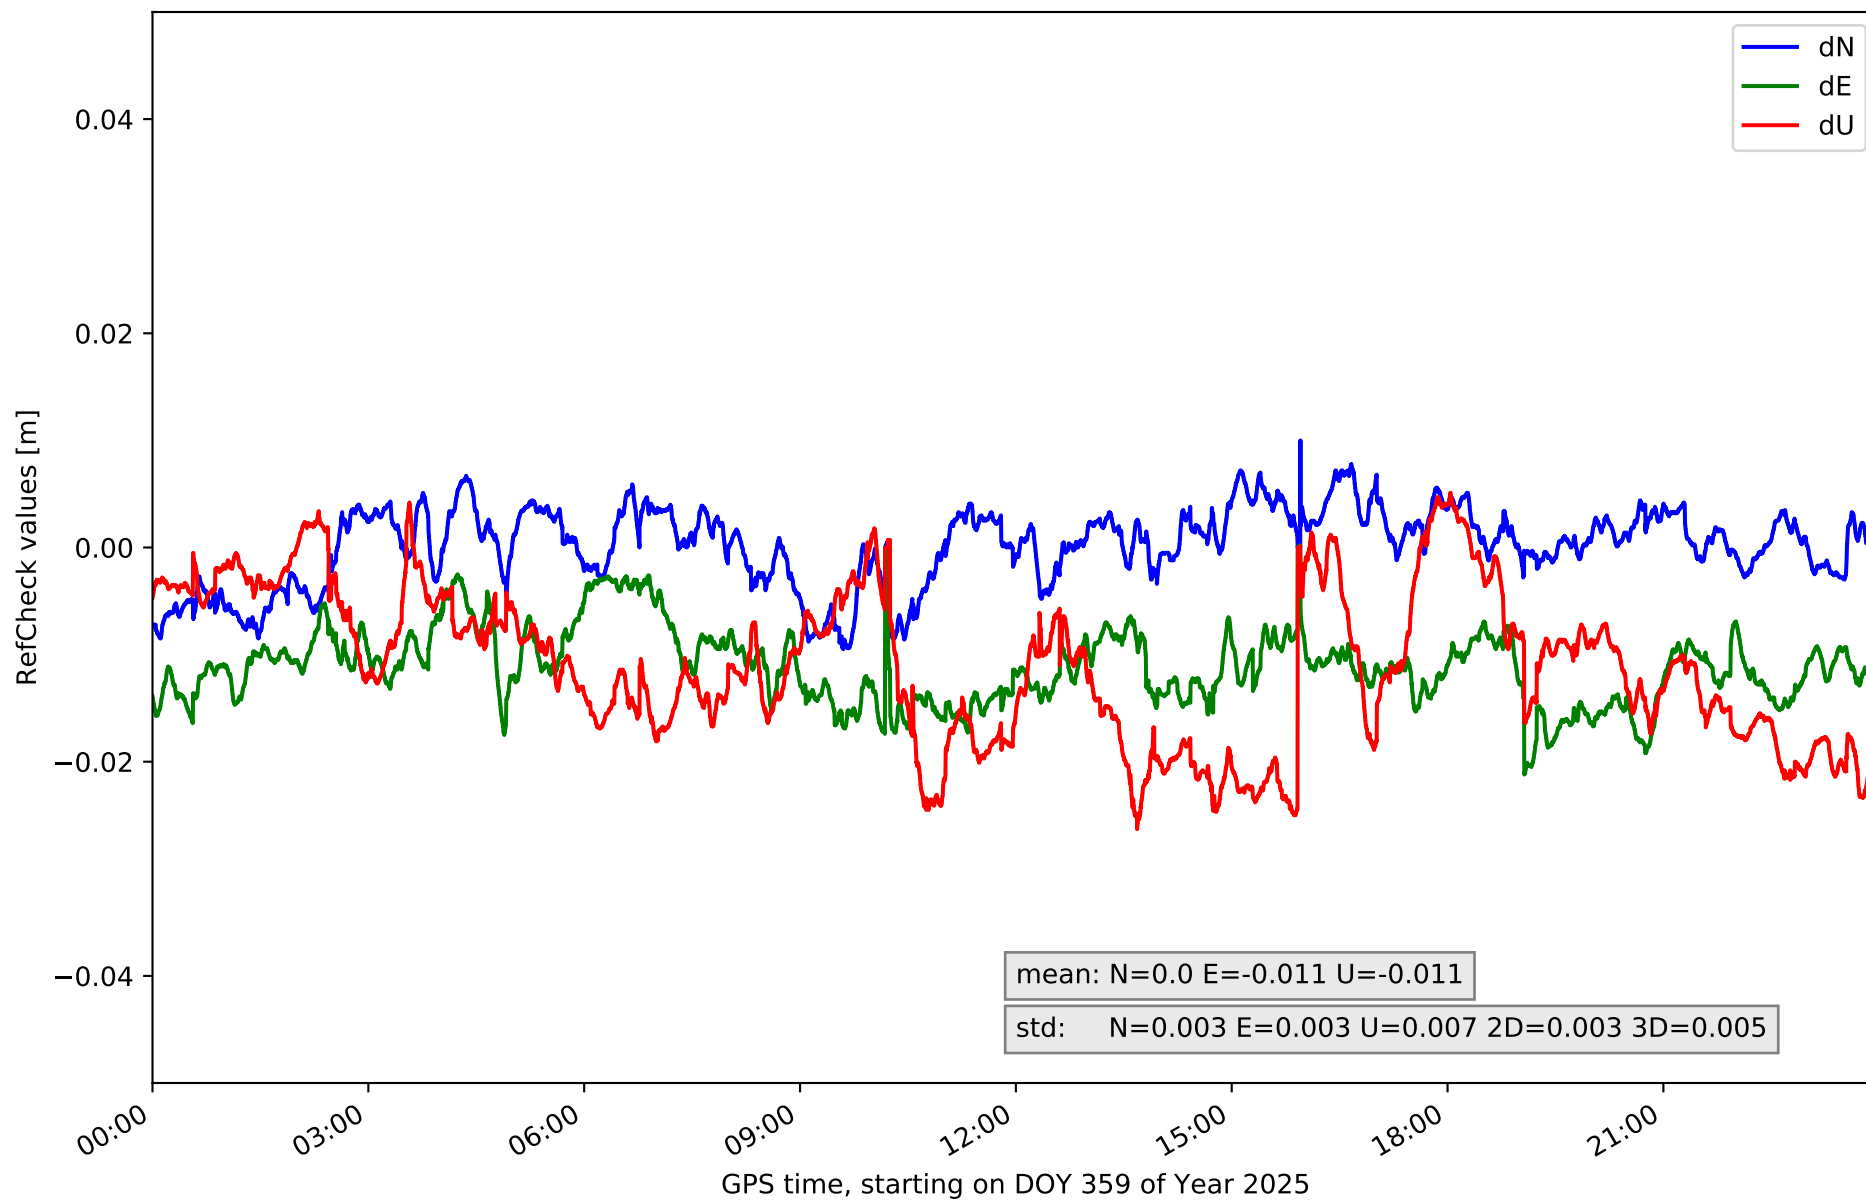

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.013	0.023	0.005	-0.022	0.024	0.006	-0.033	0.023	0.01	0.004	0.005	49364	77.0	16263	25.4
EH02	-0.011	0.019	0.005	-0.0	0.048	0.005	-0.041	0.06	0.016	0.005	0.012	62110	96.8	59871	93.3
GOM1	-0.019	0.009	0.005	-0.026	0.014	0.007	-0.054	0.06	0.02	0.005	0.011	56141	87.5	40304	62.8
GOME	-0.015	0.011	0.004	-0.018	0.011	0.005	-0.025	0.013	0.008	0.003	0.006	11278	17.6	4853	7.6
IZAN	-0.014	0.004	0.003	-0.017	0.001	0.003	-0.021	0.001	0.004	0.003	0.004	34329	53.5	7113	11.1
LP01	-0.025	-0.003	0.004	-0.009	0.017	0.004	-0.022	0.026	0.009	0.003	0.005	58356	91.0	12300	19.2
LP03	-0.016	0.013	0.004	-0.017	0.011	0.005	-0.029	0.014	0.007	0.003	0.005	8918	13.9	2532	3.9
LPAL	-0.021	-0.005	0.003	-0.001	0.017	0.002	-0.025	0.009	0.007	0.003	0.004	61798	96.4	18863	29.4
LRES	-0.013	0.029	0.007	-0.016	0.029	0.007	-0.03	0.107	0.017	0.006	0.01	52086	81.2	34488	53.8
TN01	-0.033	0.01	0.007	-0.03	0.012	0.006	-0.032	0.024	0.011	0.005	0.006	58102	90.6	29323	45.7
TN02	-0.018	0.013	0.005	-0.027	0.008	0.005	-0.026	0.029	0.009	0.005	0.006	44437	69.3	10081	15.7
TN03	-0.011	0.011	0.003	-0.017	0.008	0.004	-0.034	0.021	0.01	0.003	0.007	9785	15.3	21882	34.1
TN06	-0.013	0.005	0.003	-0.015	0.003	0.003	-0.022	0.008	0.007	0.003	0.005	26694	41.6	7257	11.3
TN09	-0.002	0.014	0.003	-0.019	-0.004	0.003	-0.029	0.011	0.009	0.003	0.005	58079	90.6	30778	48.0
TE11	-0.009	0.01	0.003	-0.021	0.0	0.003	-0.026	0.005	0.007	0.003	0.005	44047	68.7	18051	28.1
Mean	-0.016	0.011	0.004	-0.017	0.013	0.005	-0.03	0.027	0.01	0.004	0.006	42368.3	66.1	20930.6	32.6
Min/Max	-0.033	0.029	0.007	-0.03	0.048	0.007	-0.054	0.107	0.02	0.006	0.012	62110	96.8	59871	93.3

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	93.7	93.6	93.6	95.6	92.1
considering satellites with dual-frequency fixed	90.8	91.0	89.3	92.8	89.1
considering all signals separately	91.0	91.0	89.3	93.2	88.2