

## summary for network N31T

timeperiod chosen: from 2025-01-05-00:00:00 until 2025-01-05-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.0 seconds


average fixing percentage with threshold set to 0.3: 74.3 percent

stations available: 7 of 7


station information:

station FUER:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 76.887
station LALA:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 62.306
station LZ01:	antenna: TRM59800.00	SCIS	receiver: TRIMBLE NETR9	height: 52.693
station LZ02:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 58.039
station LZ03:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 314.762
station MASP:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 198.846
station ULP2:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 375.129


# Processing rate in network N31T

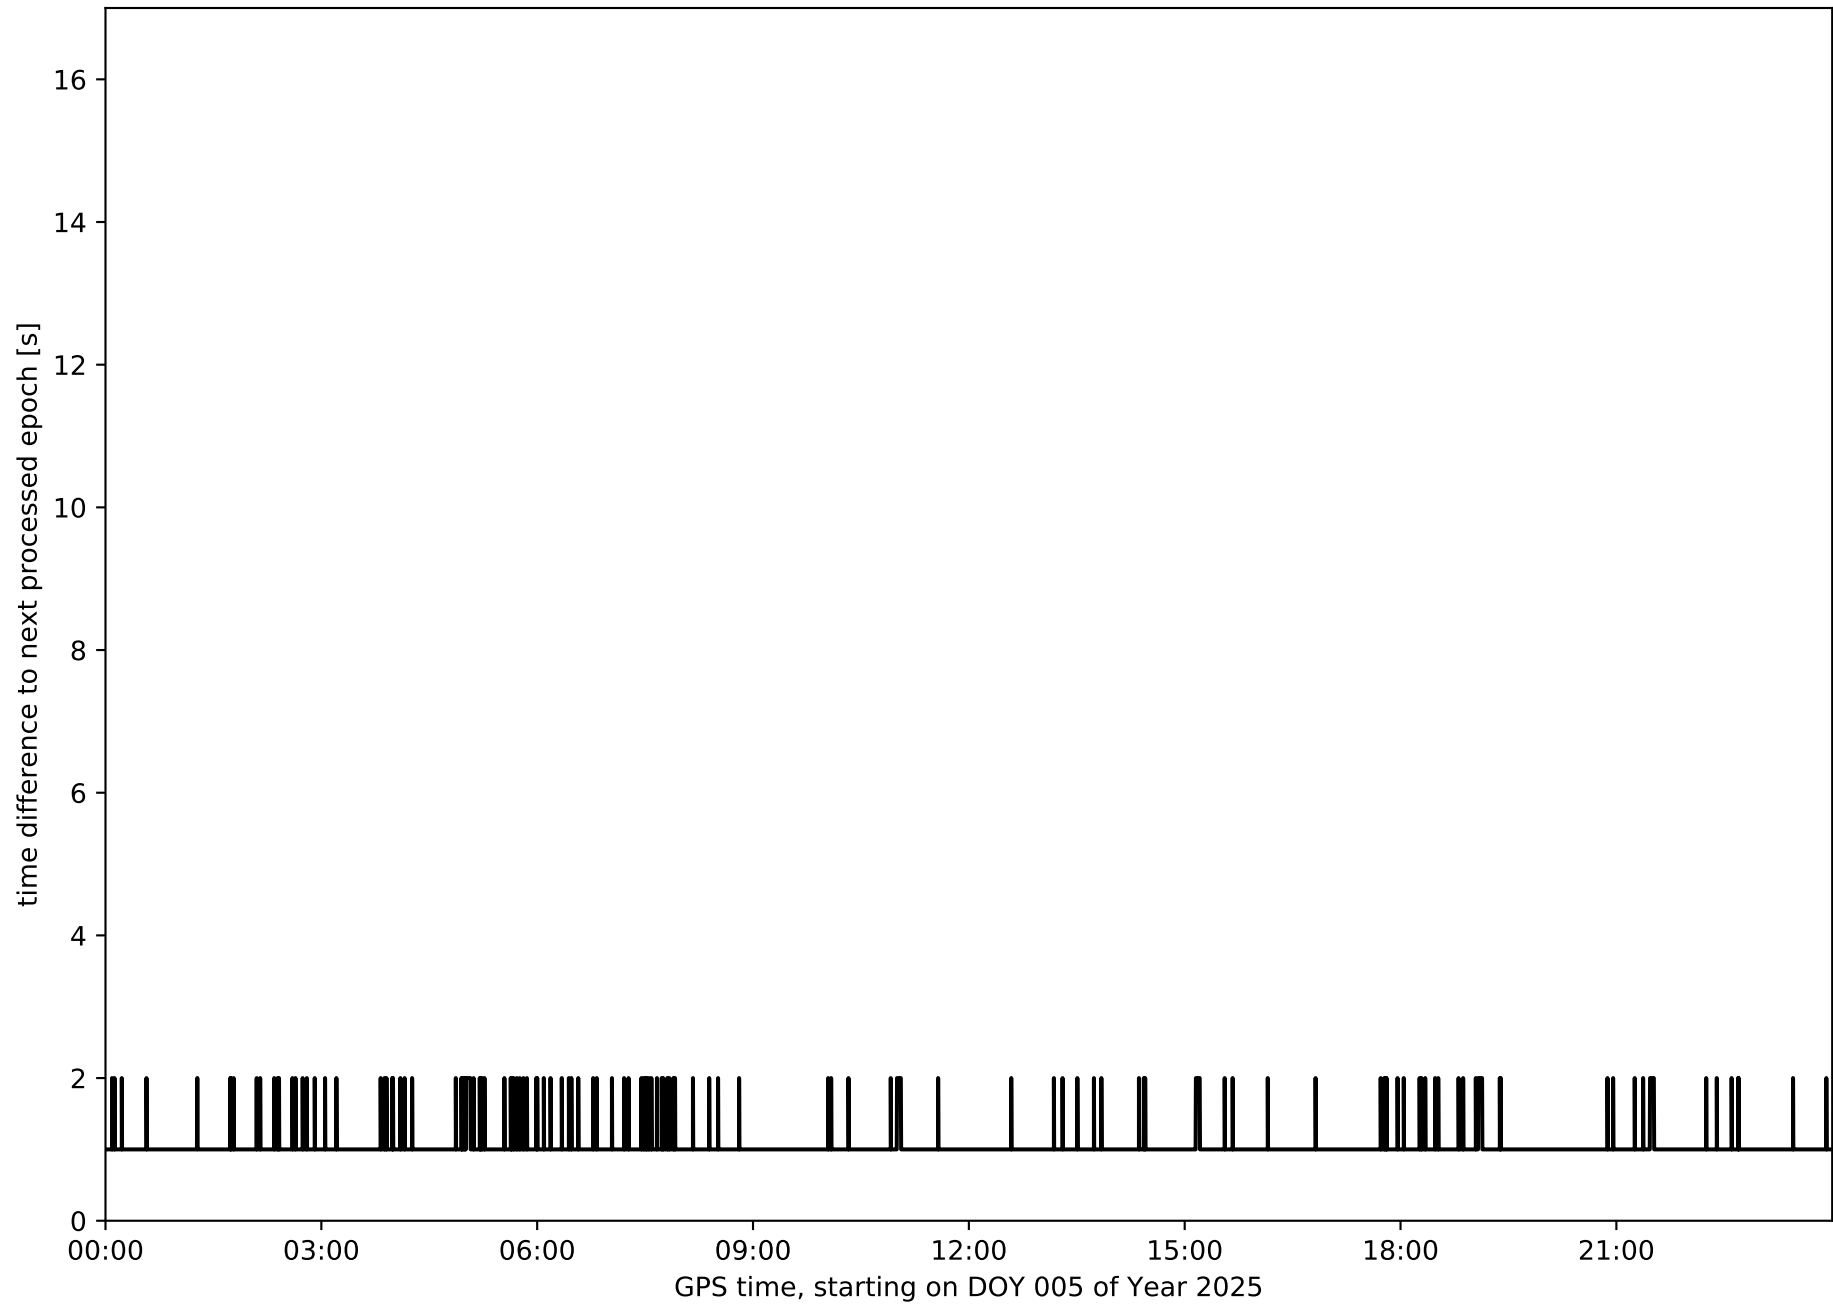


Histogram of the processing rate in network N31T (durations larger 15 seconds neglected)

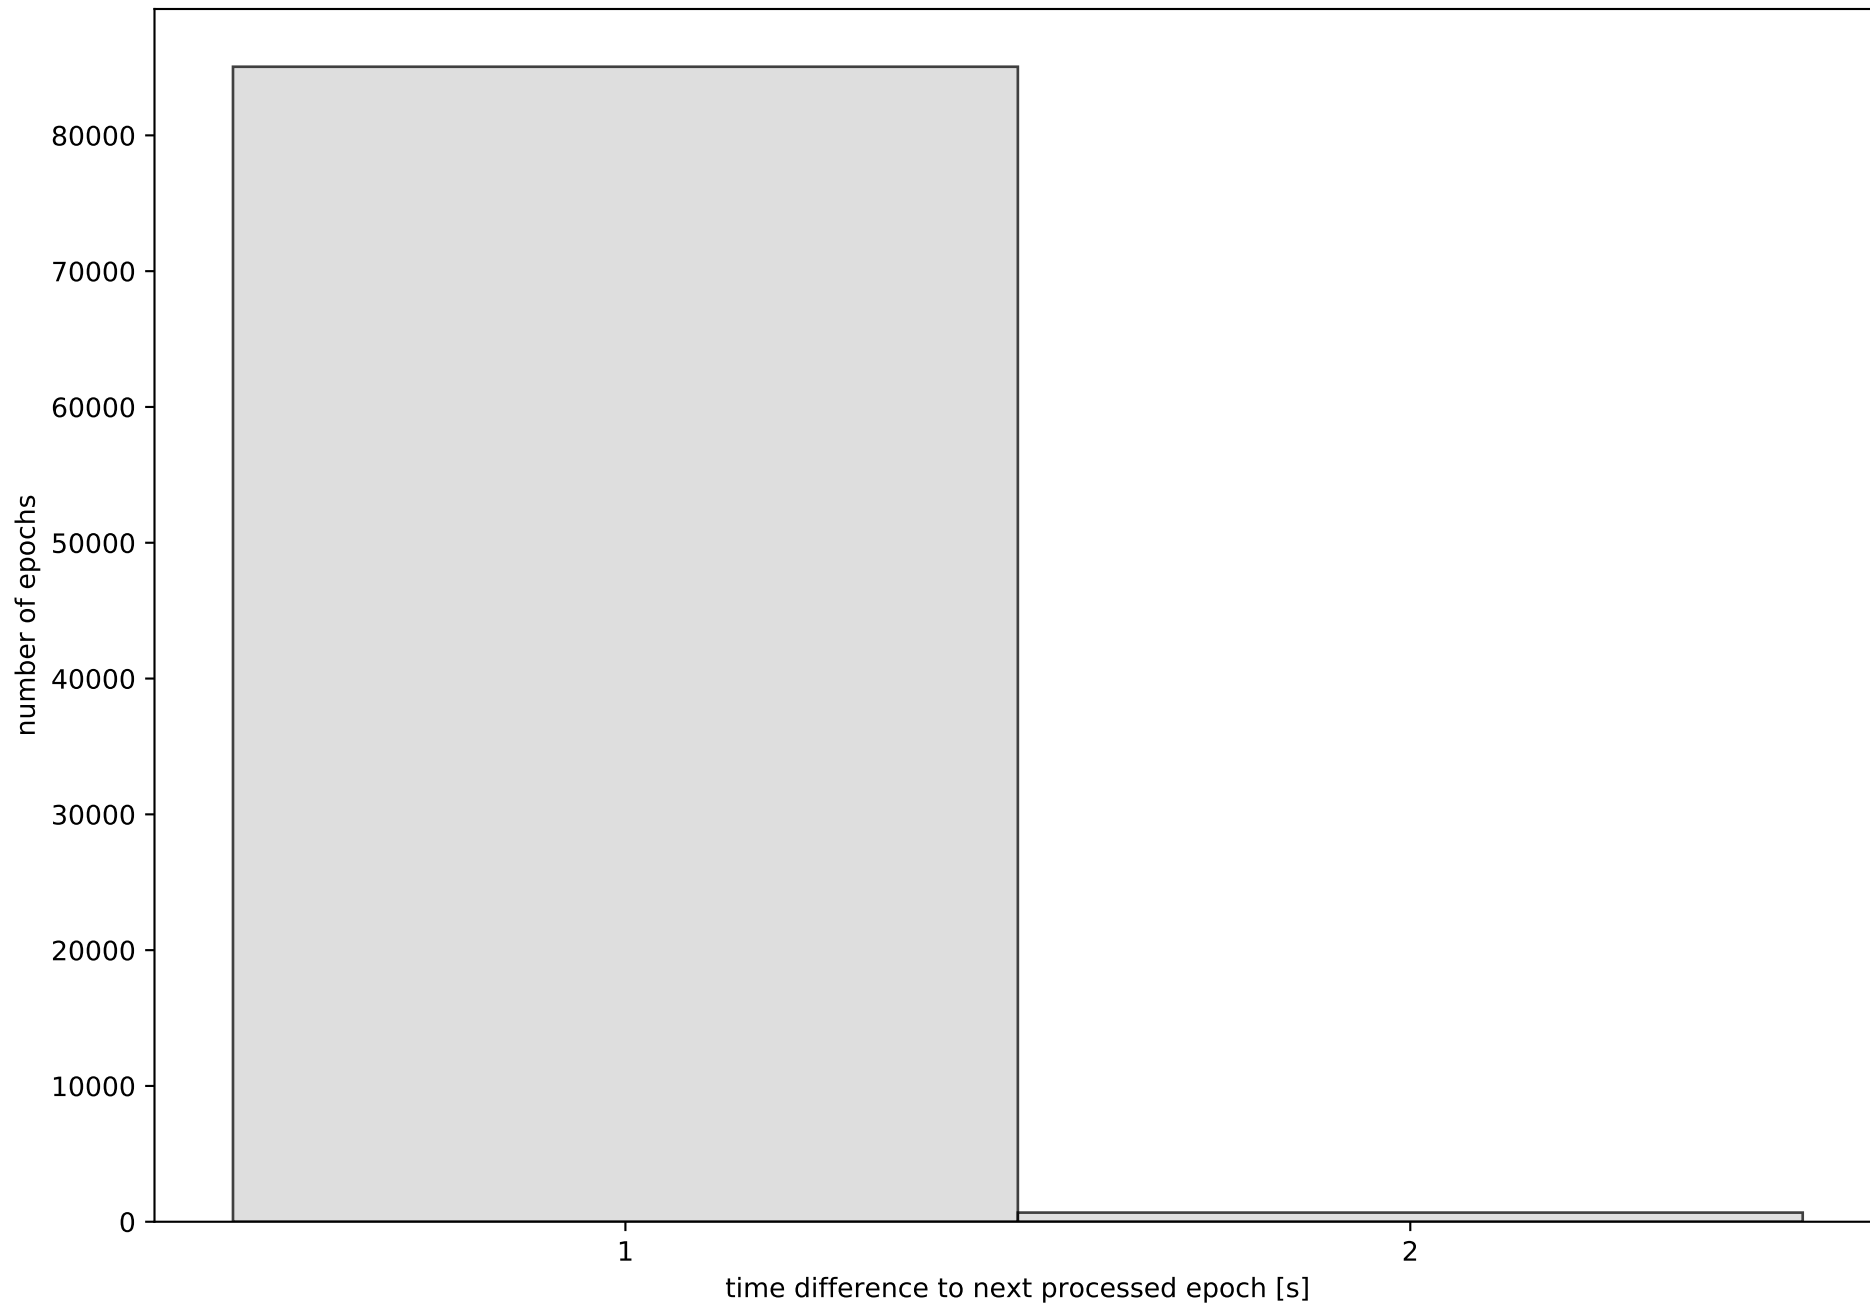


Network N31T with threshold set to 0.3

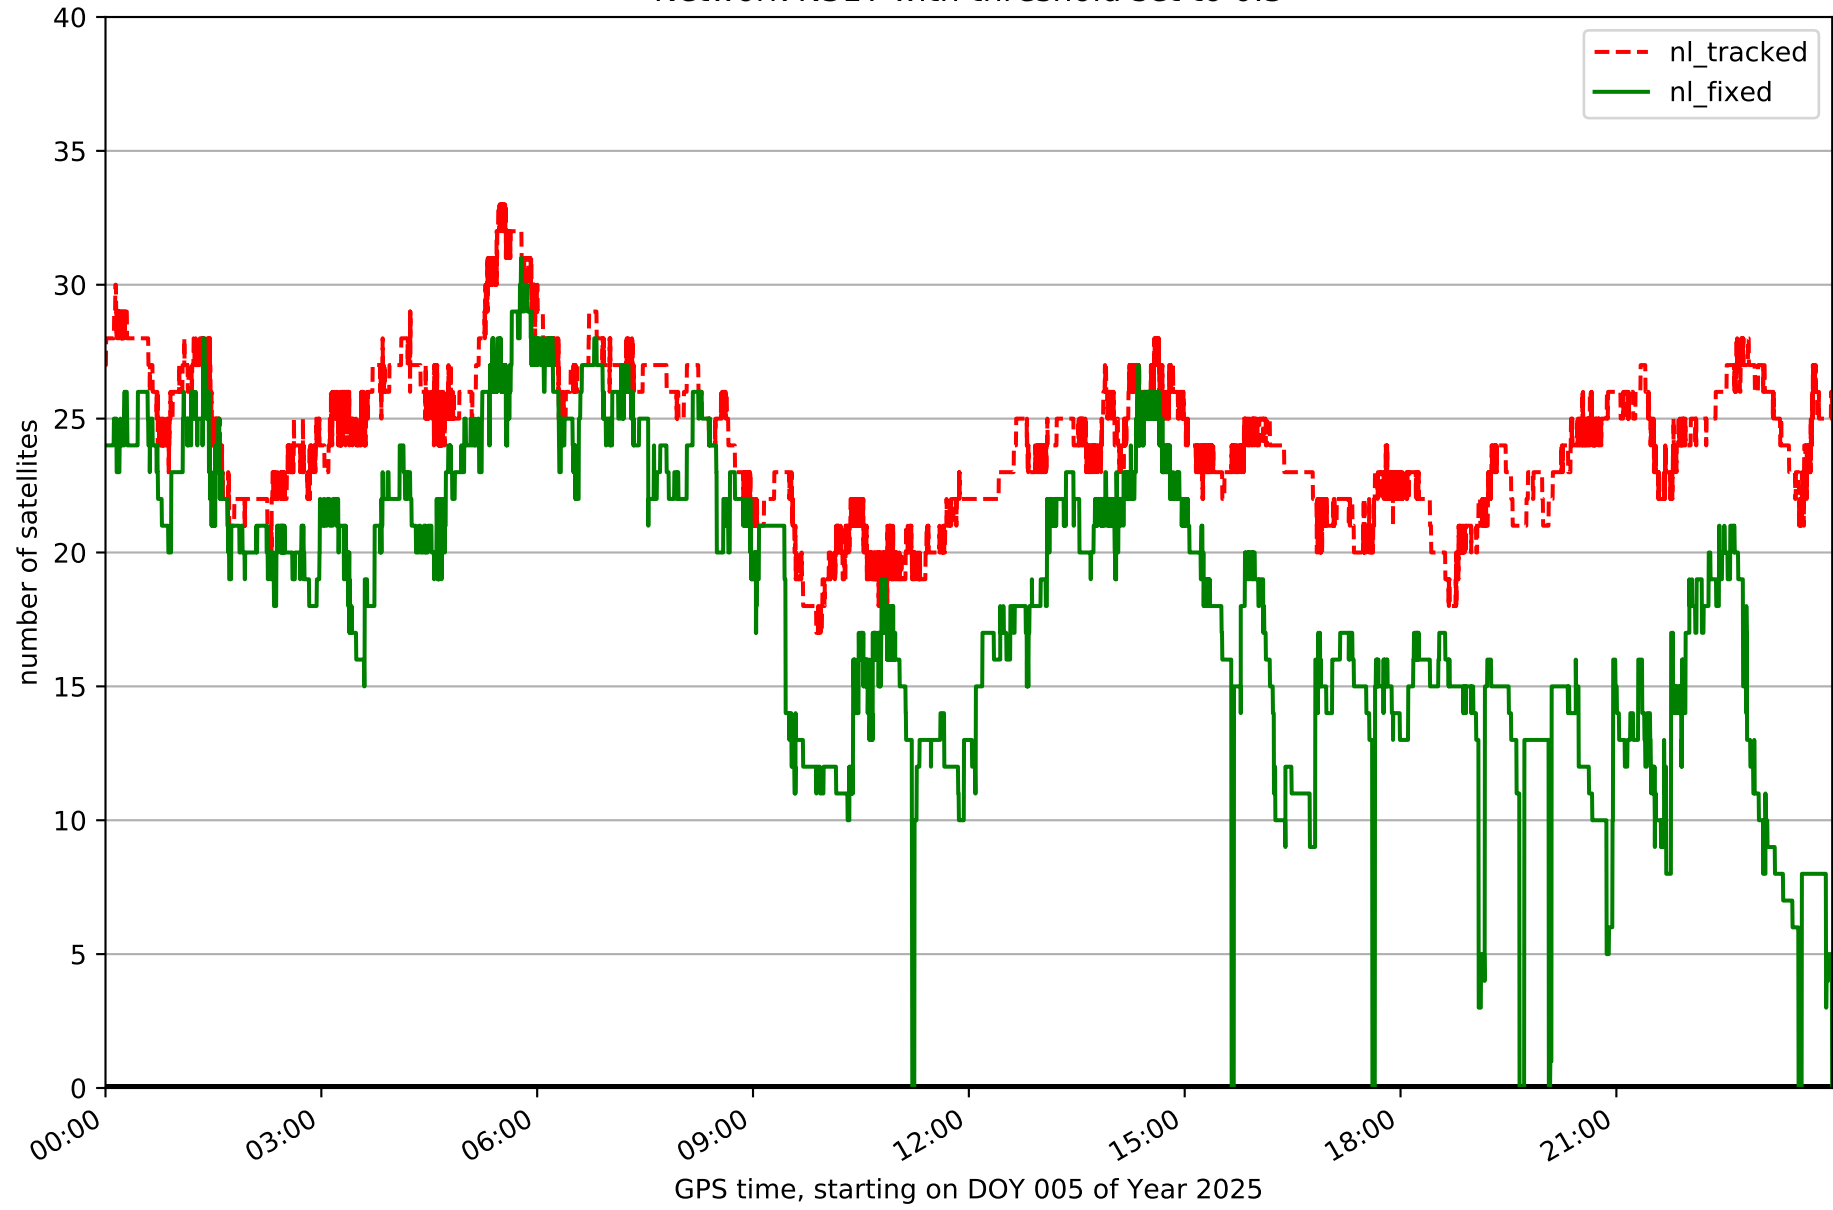


Fixing percentage of satellites in network N31T with threshold set to 0.3

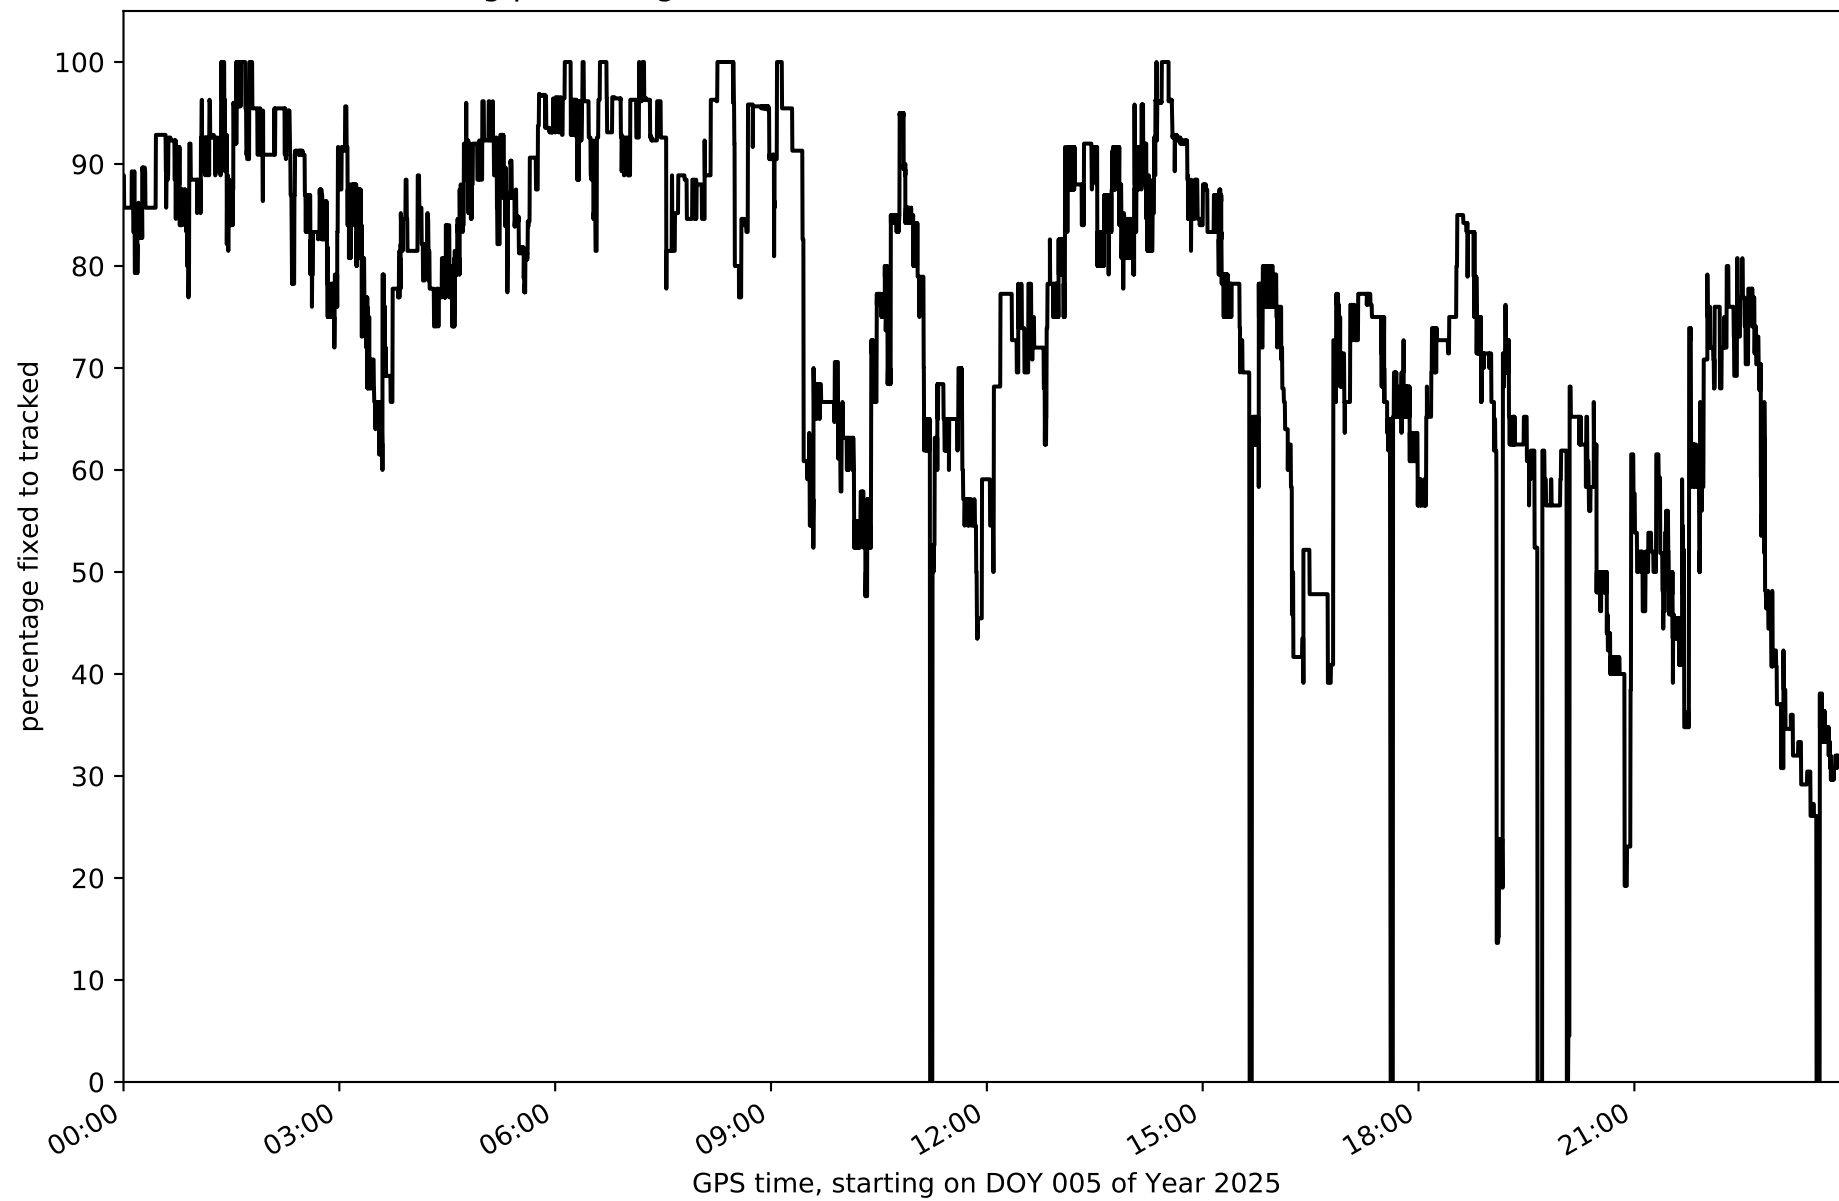


Network N31T - only GPS with threshold set to 0.3

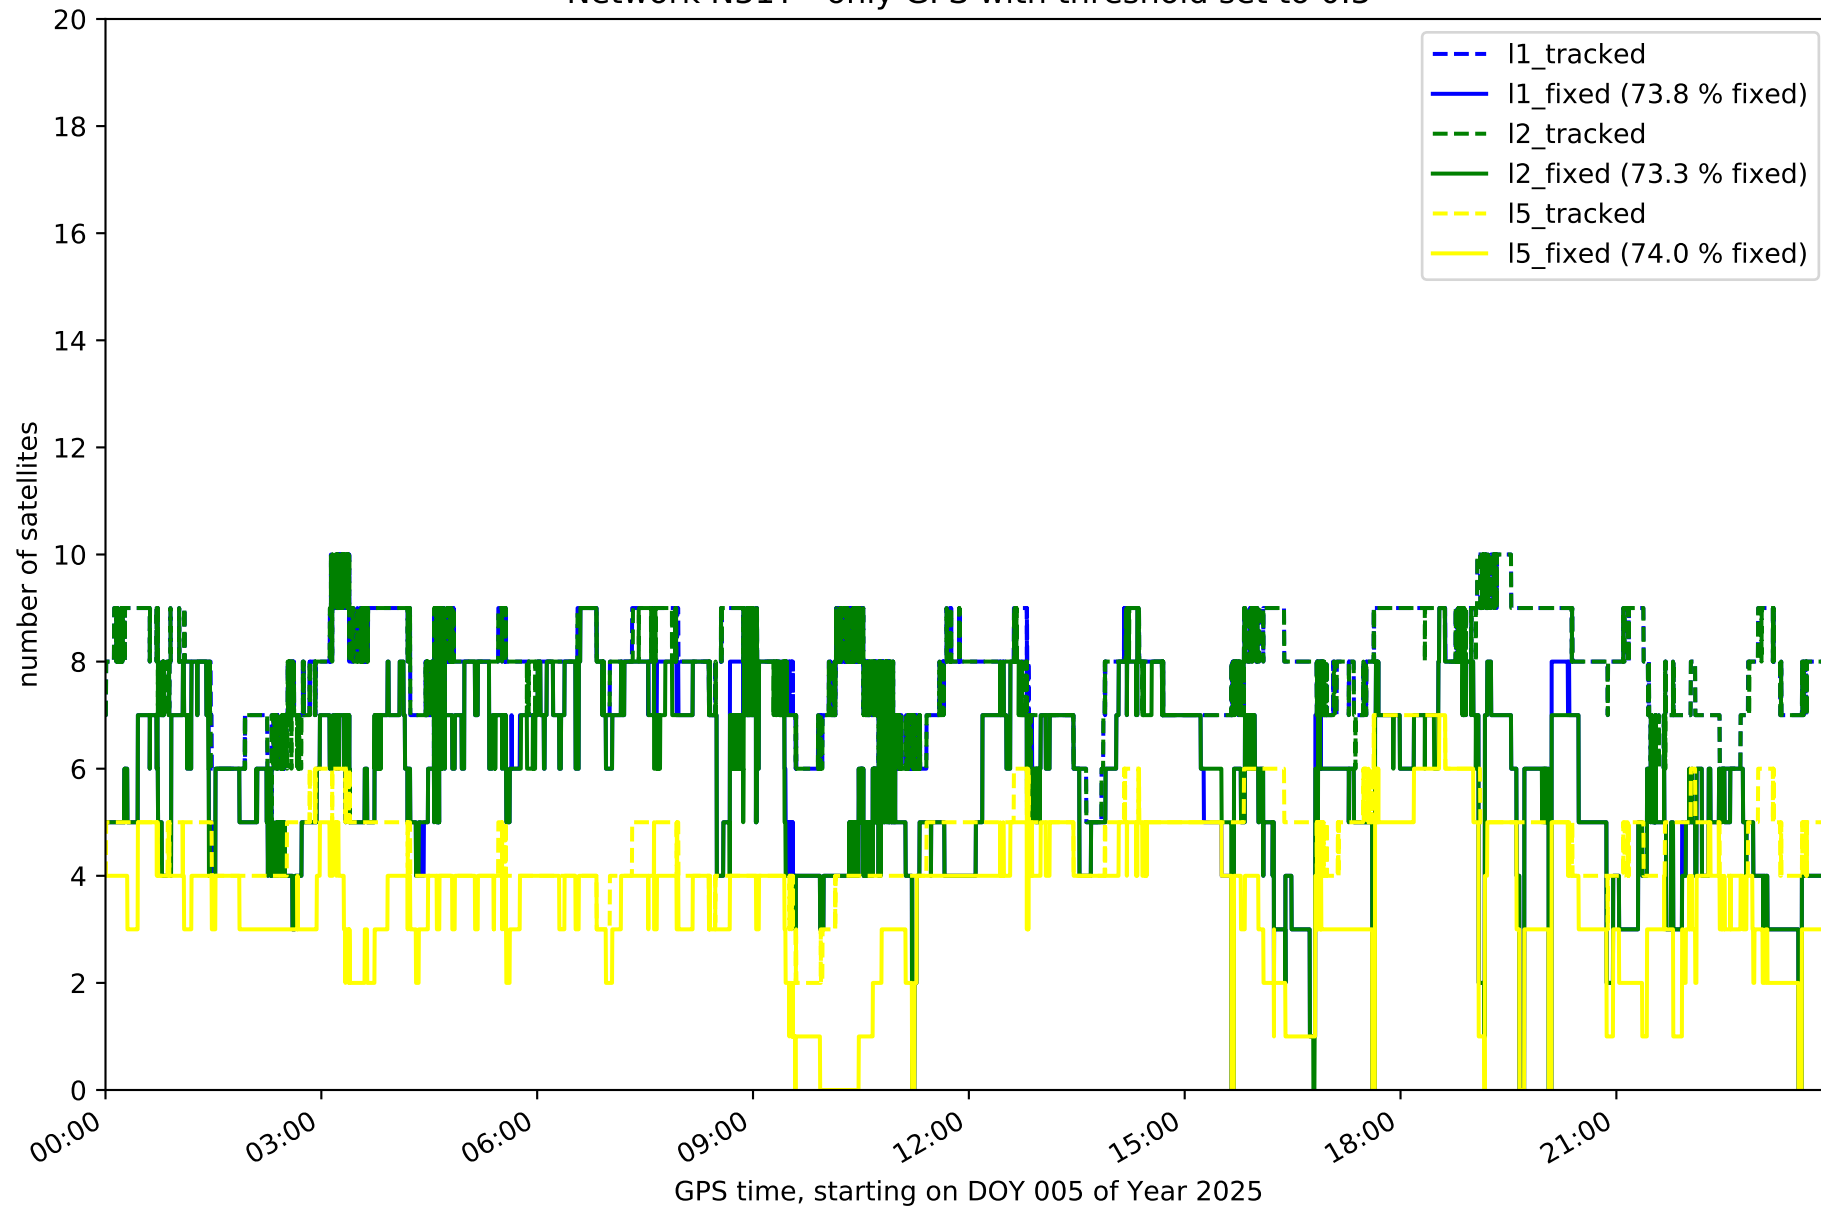

Network N31T - only GLONASS with threshold set to 0.3

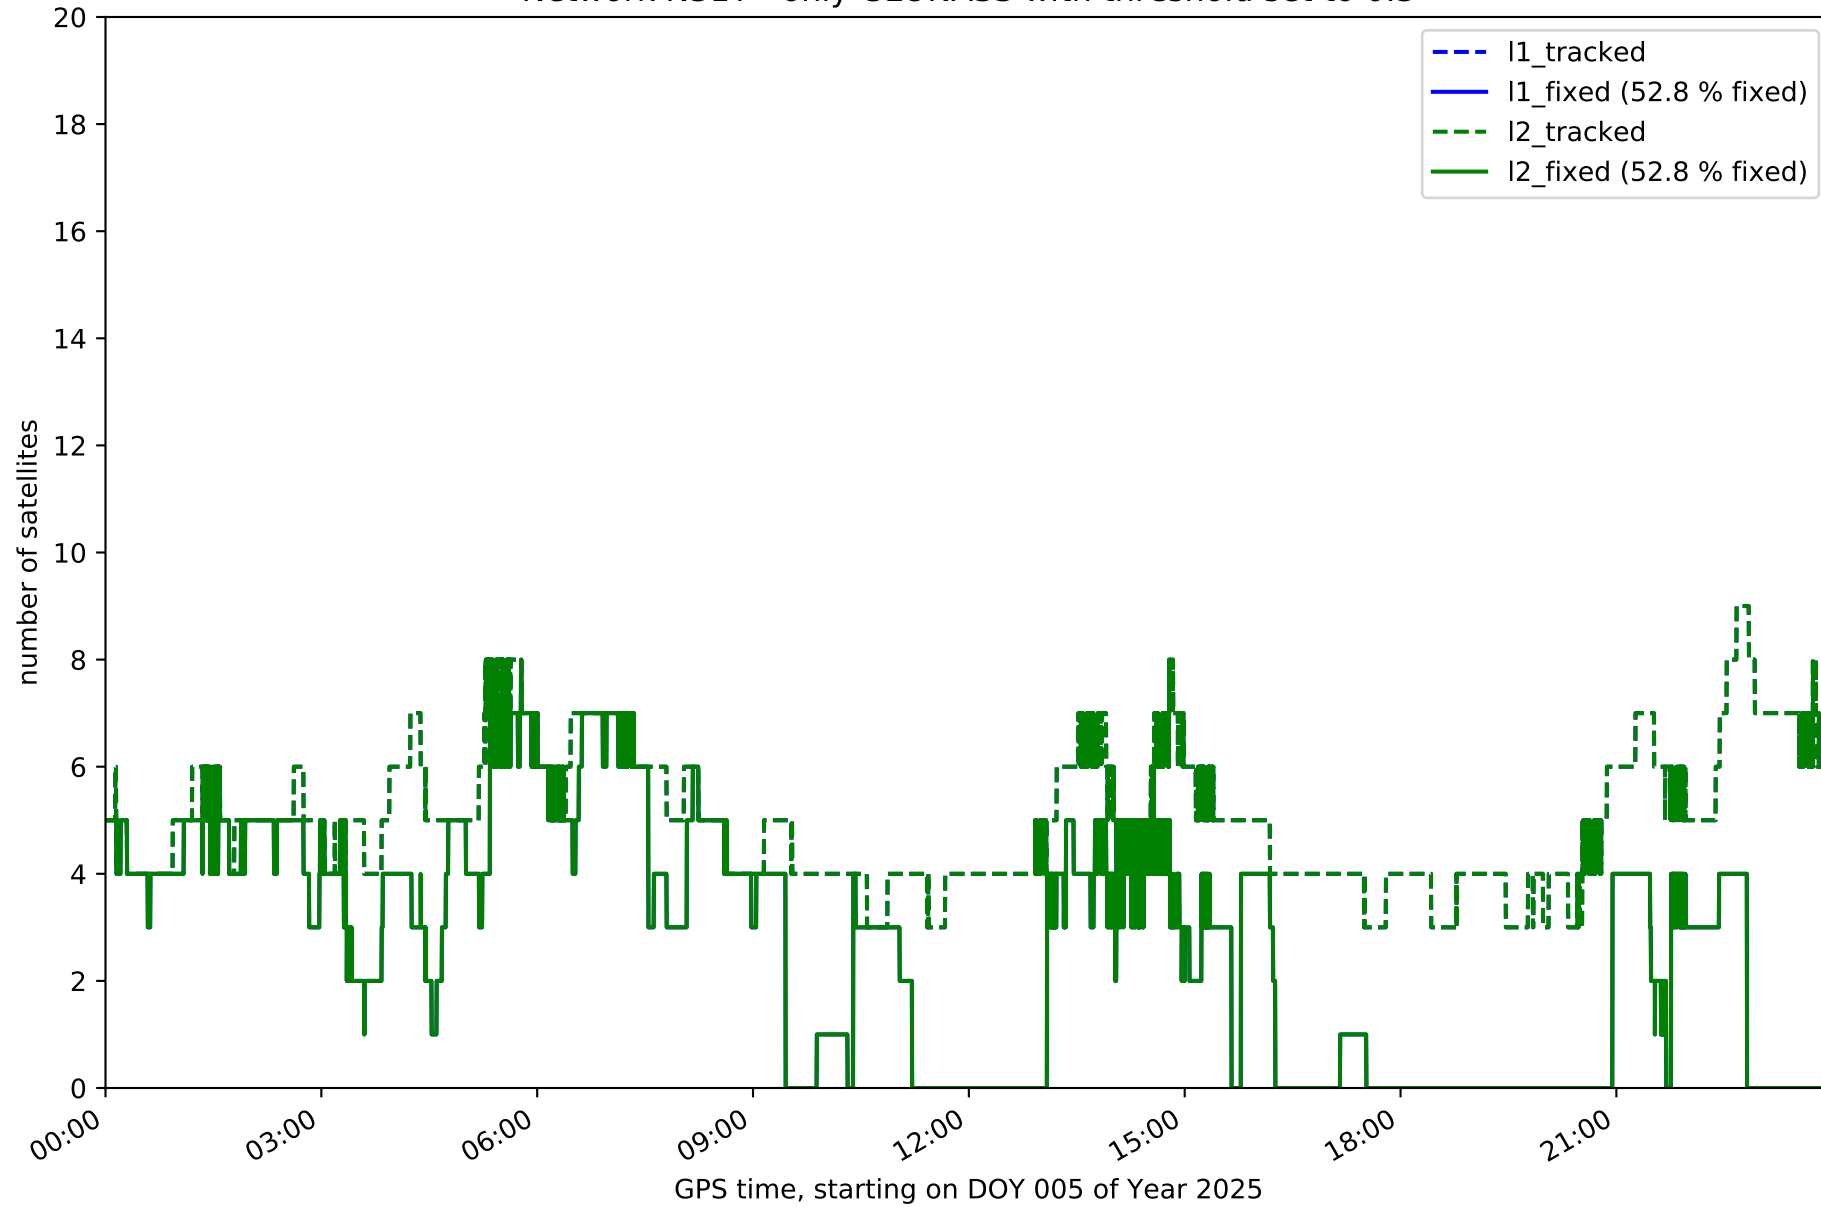


Network N31T - only BDS with threshold set to 0.3

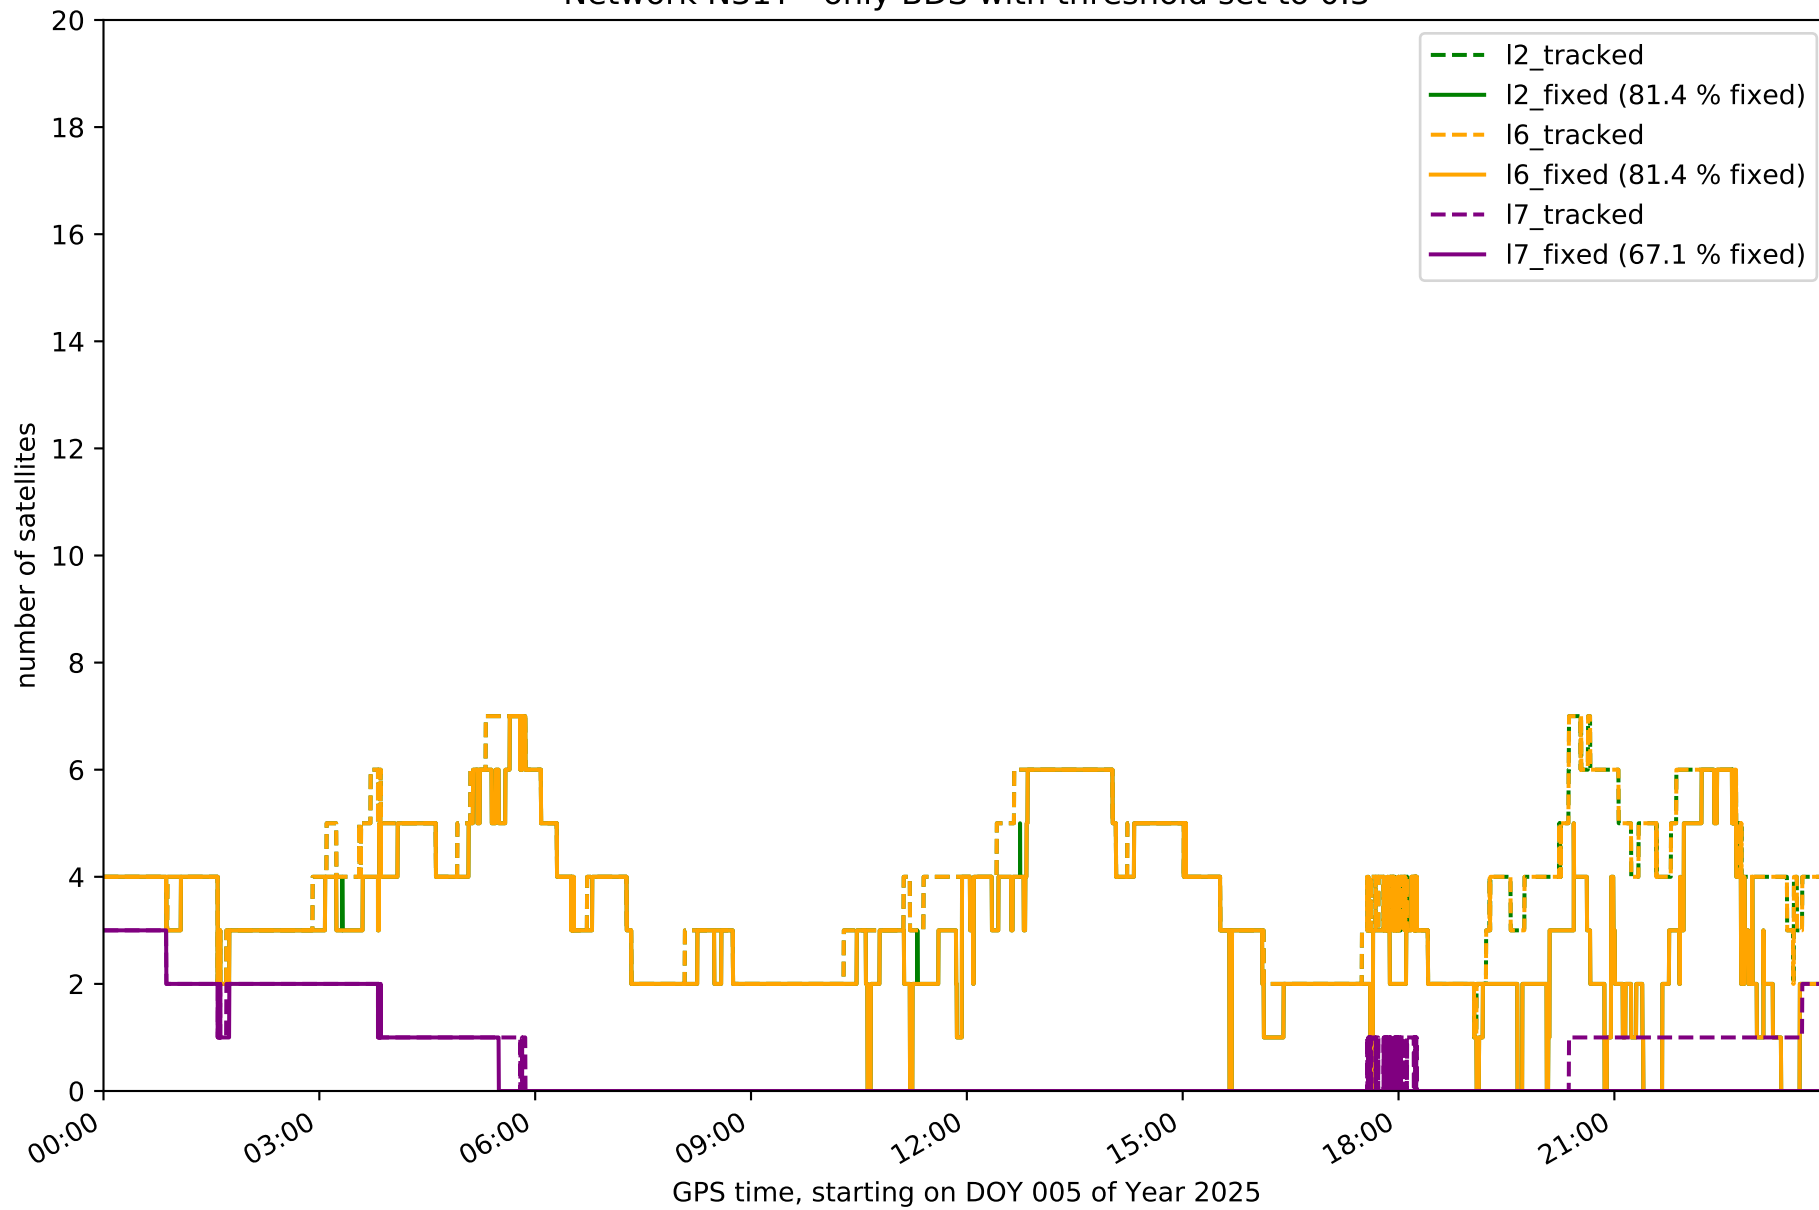





Network N31T - only Galileo with threshold set to 0.3

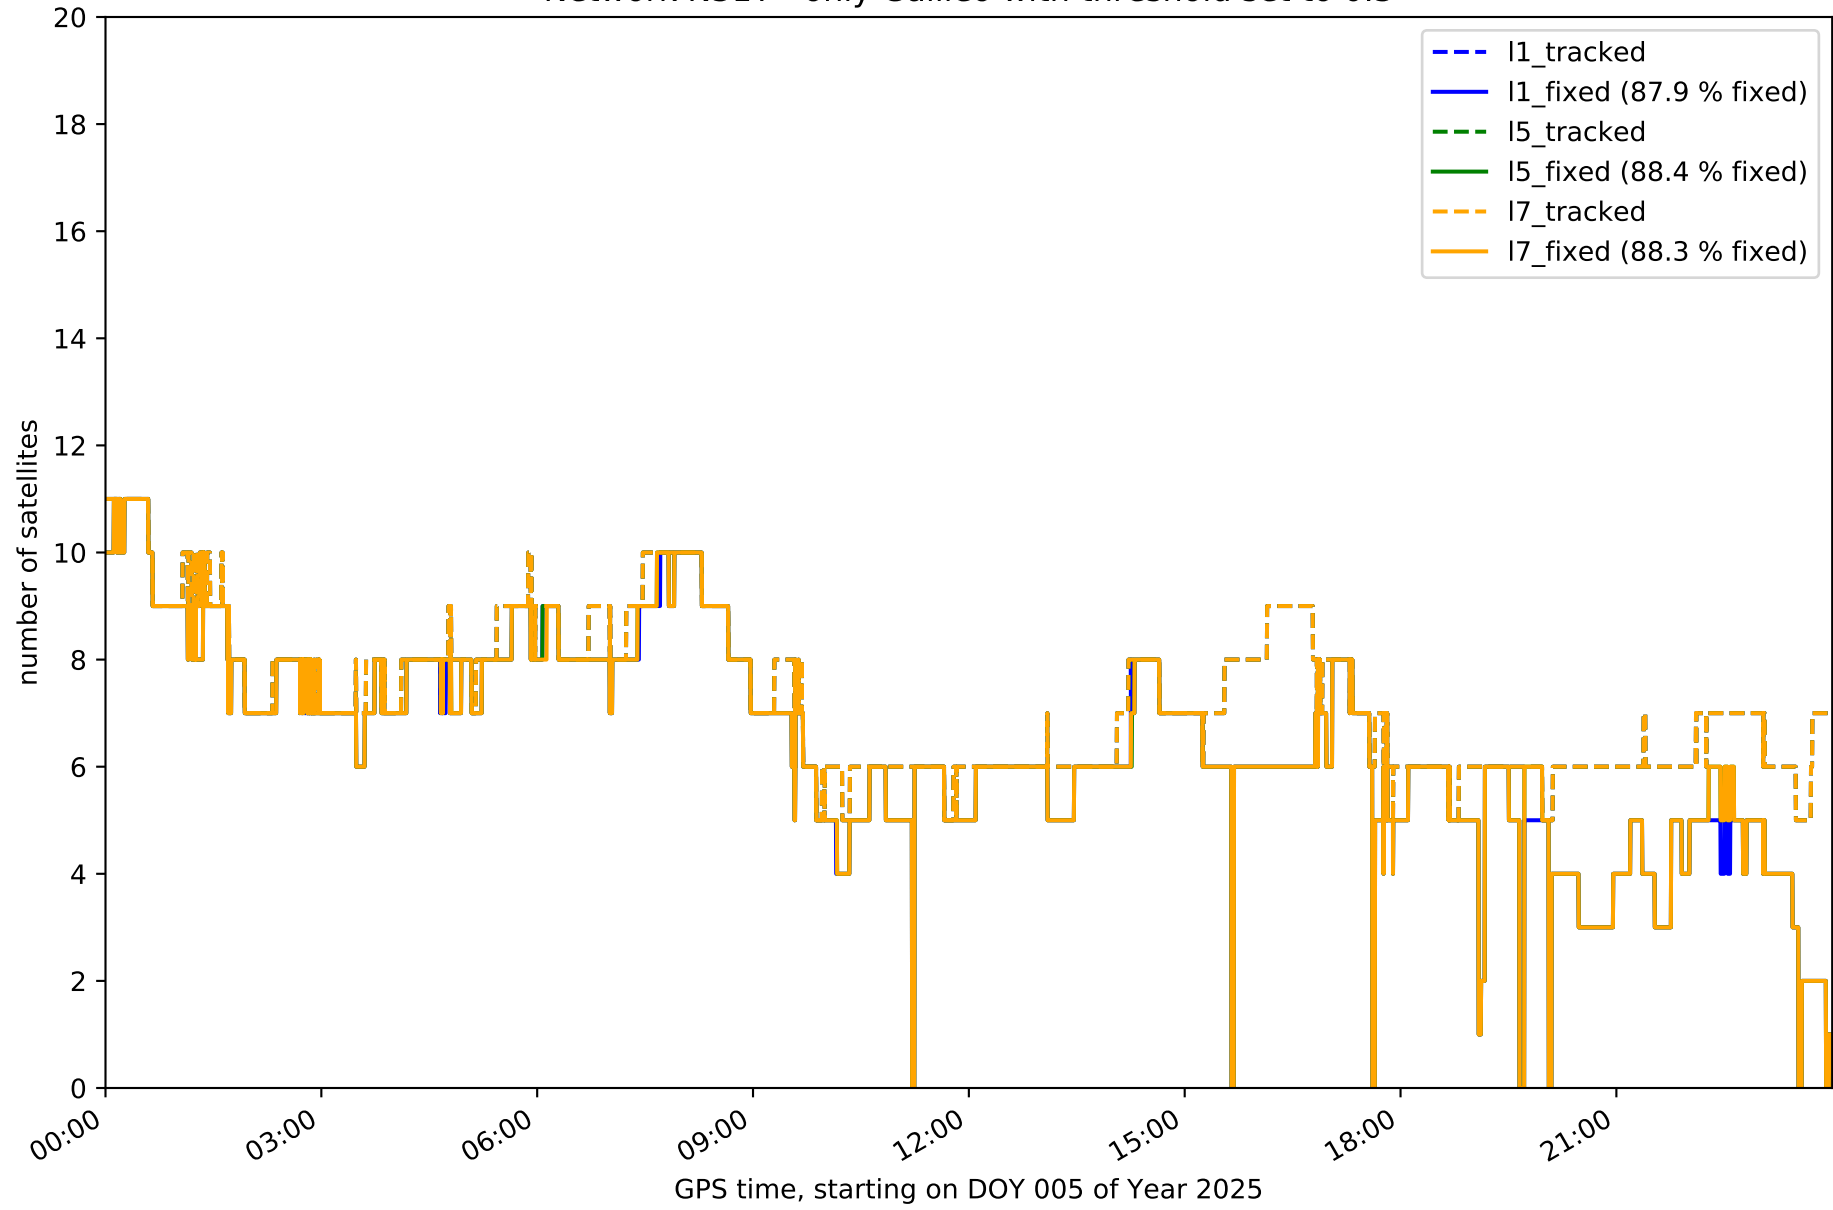


Station FUER in network N31T

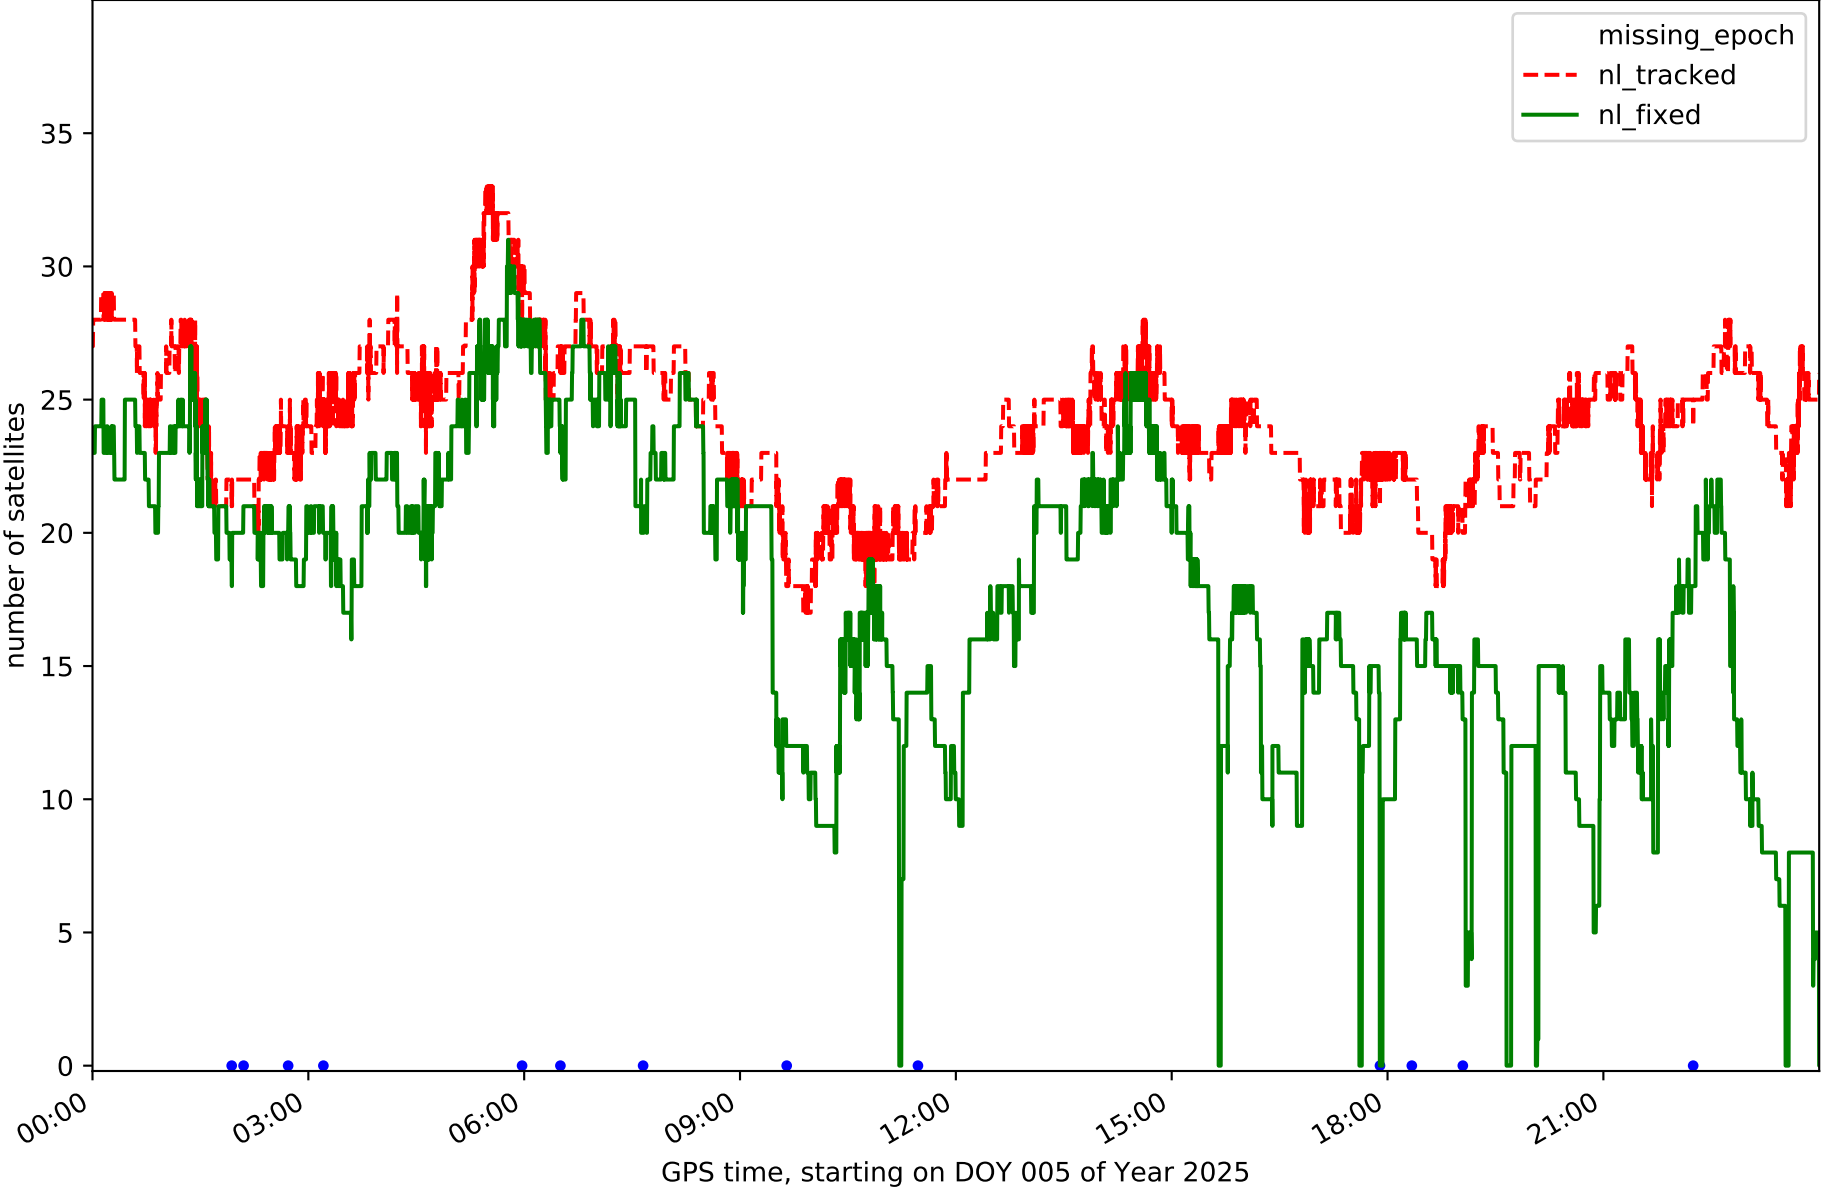


Station LALA in network N31T

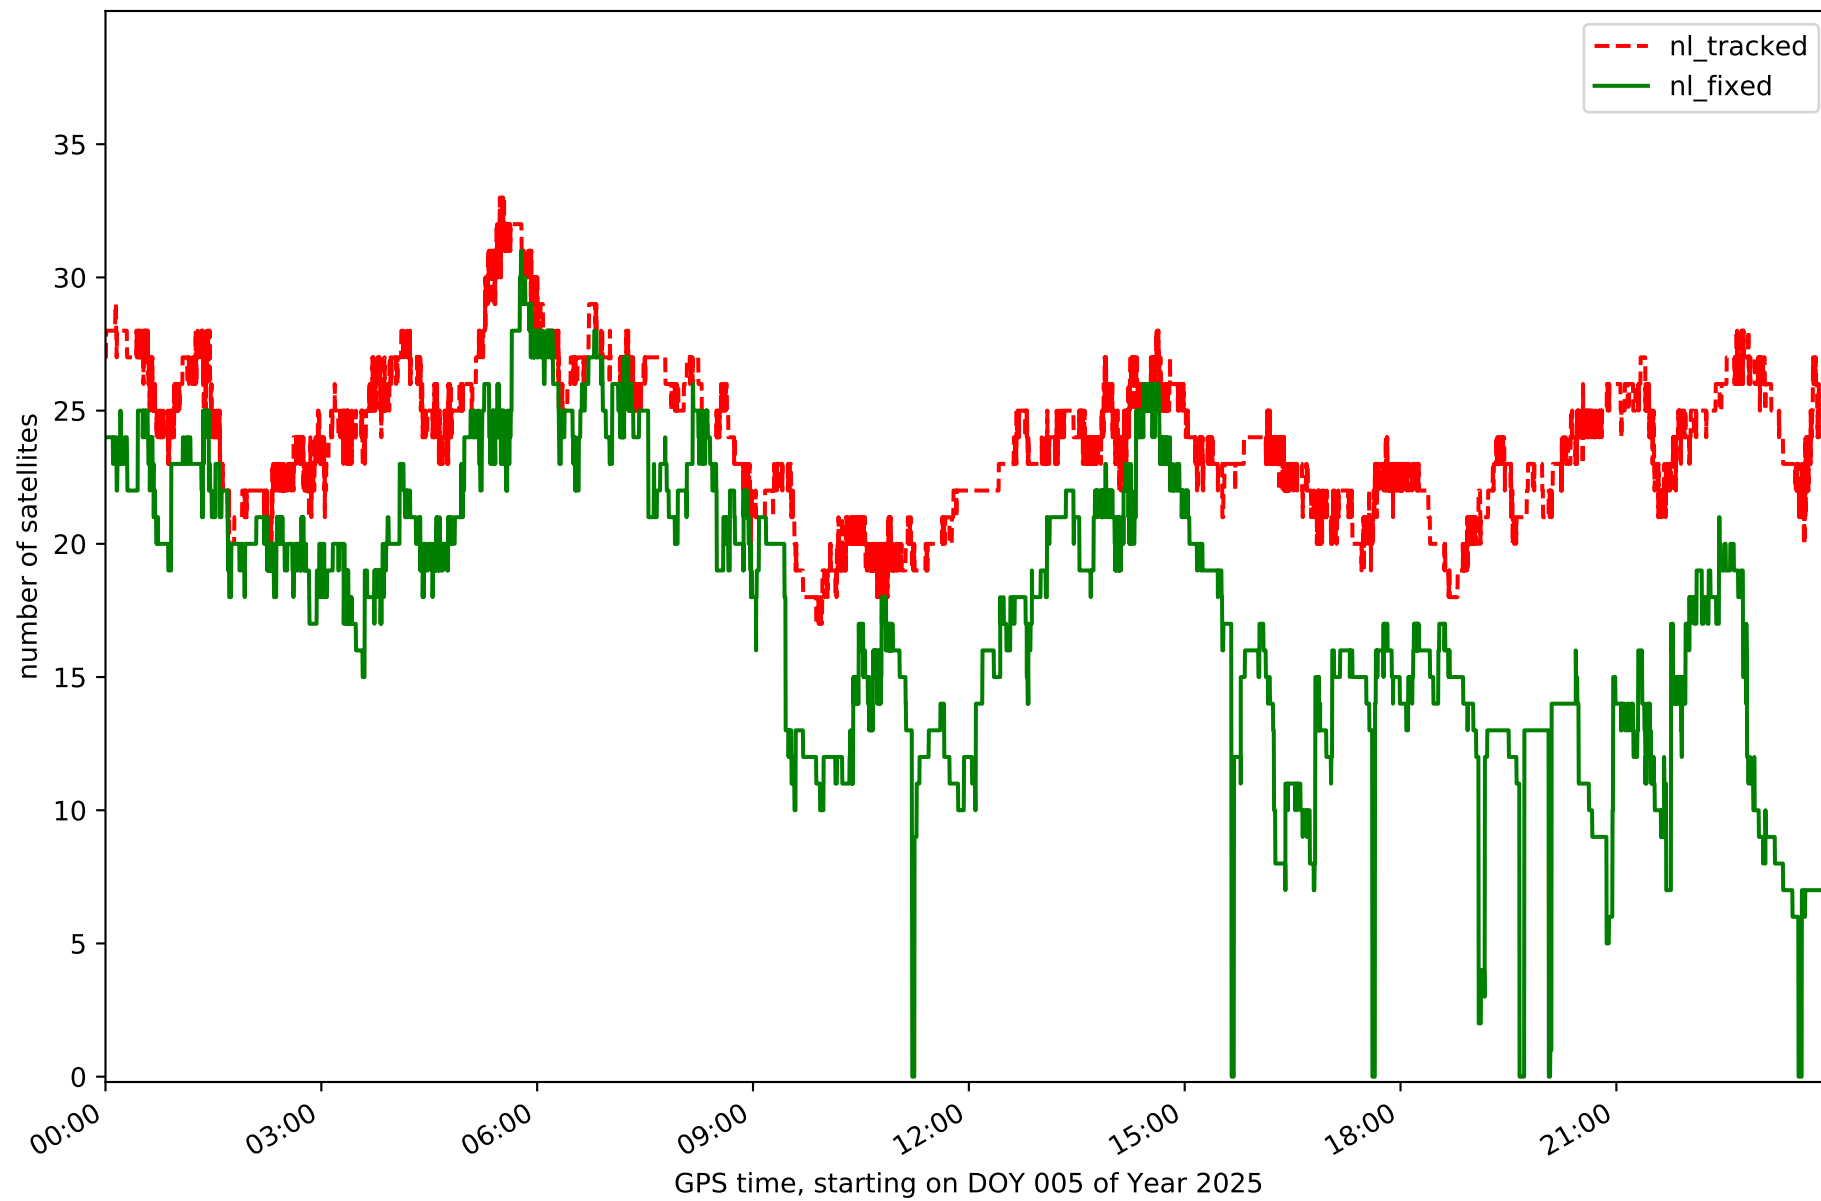


Station LZ01 in network N31T

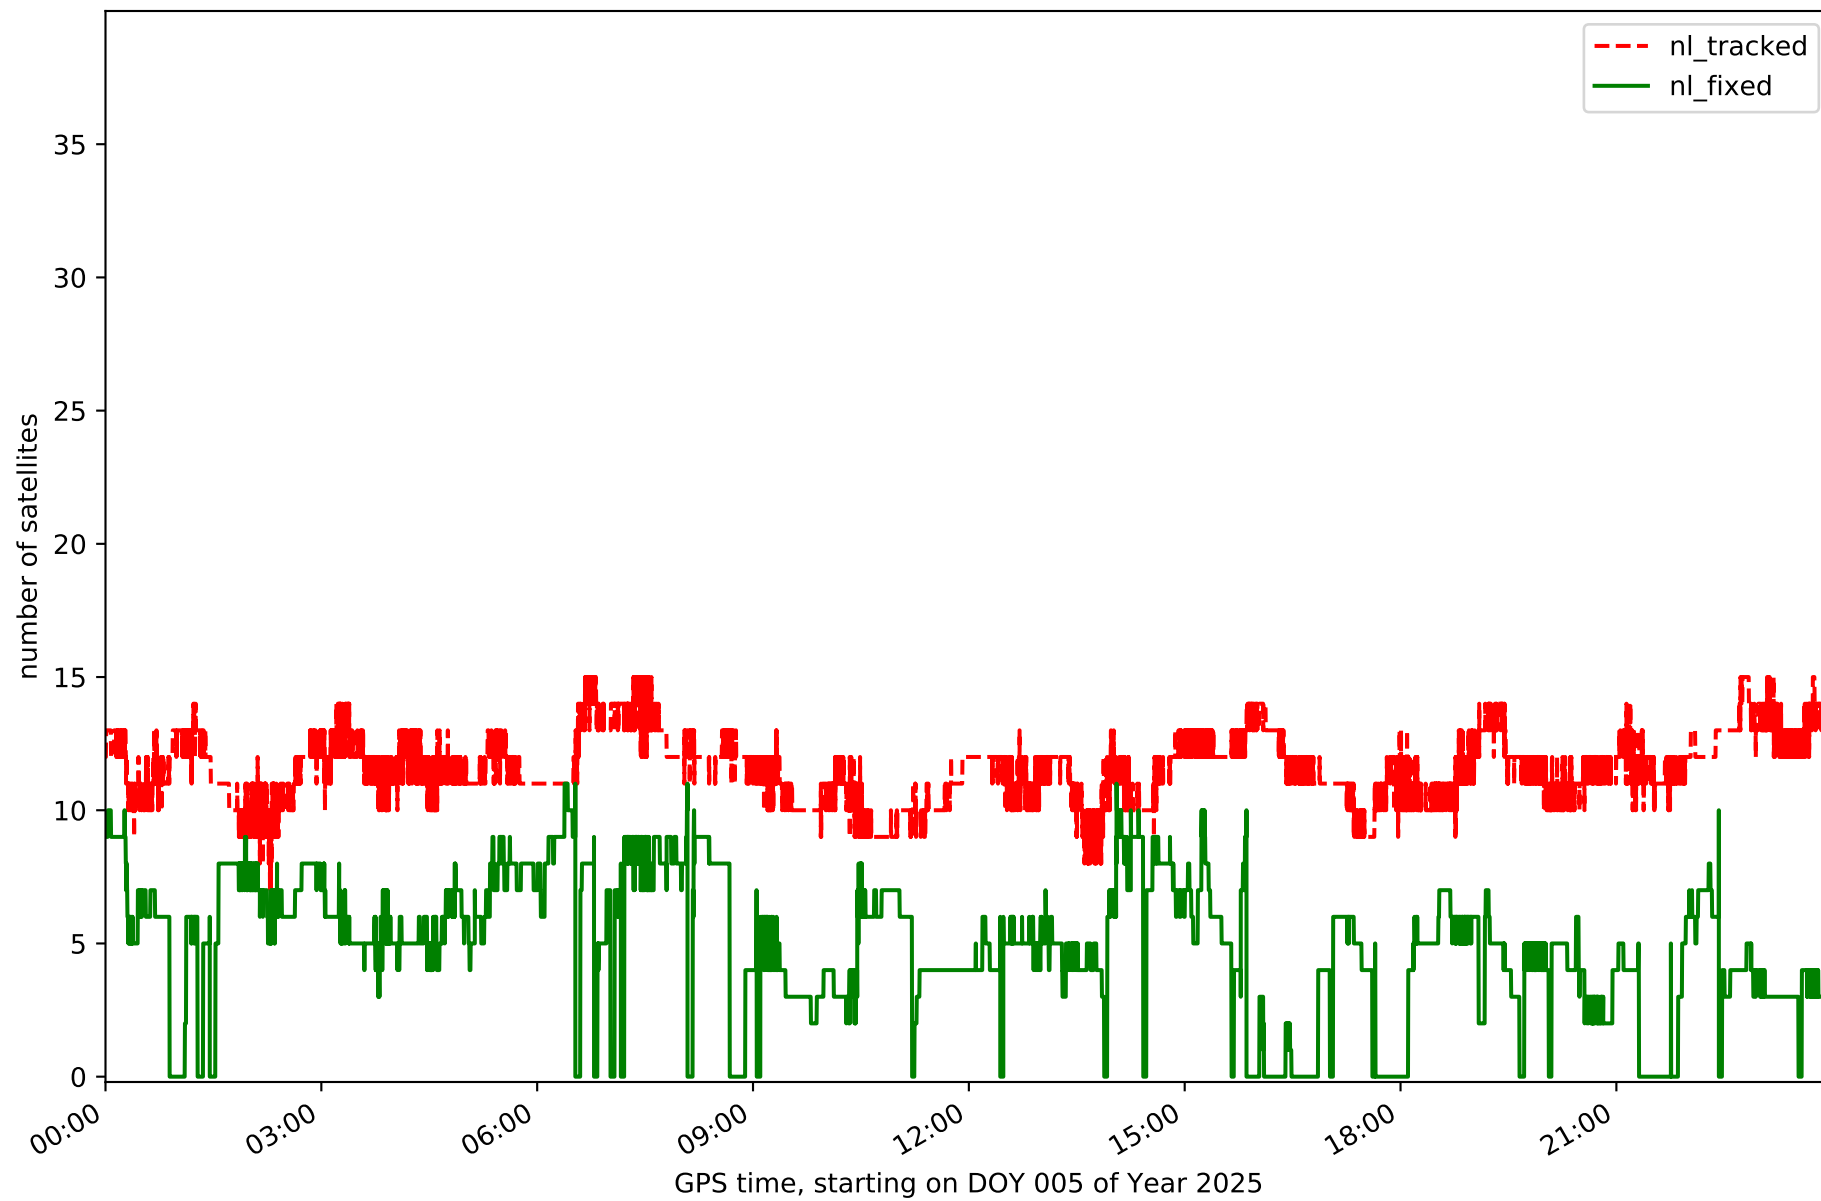


Station LZ02 in network N31T

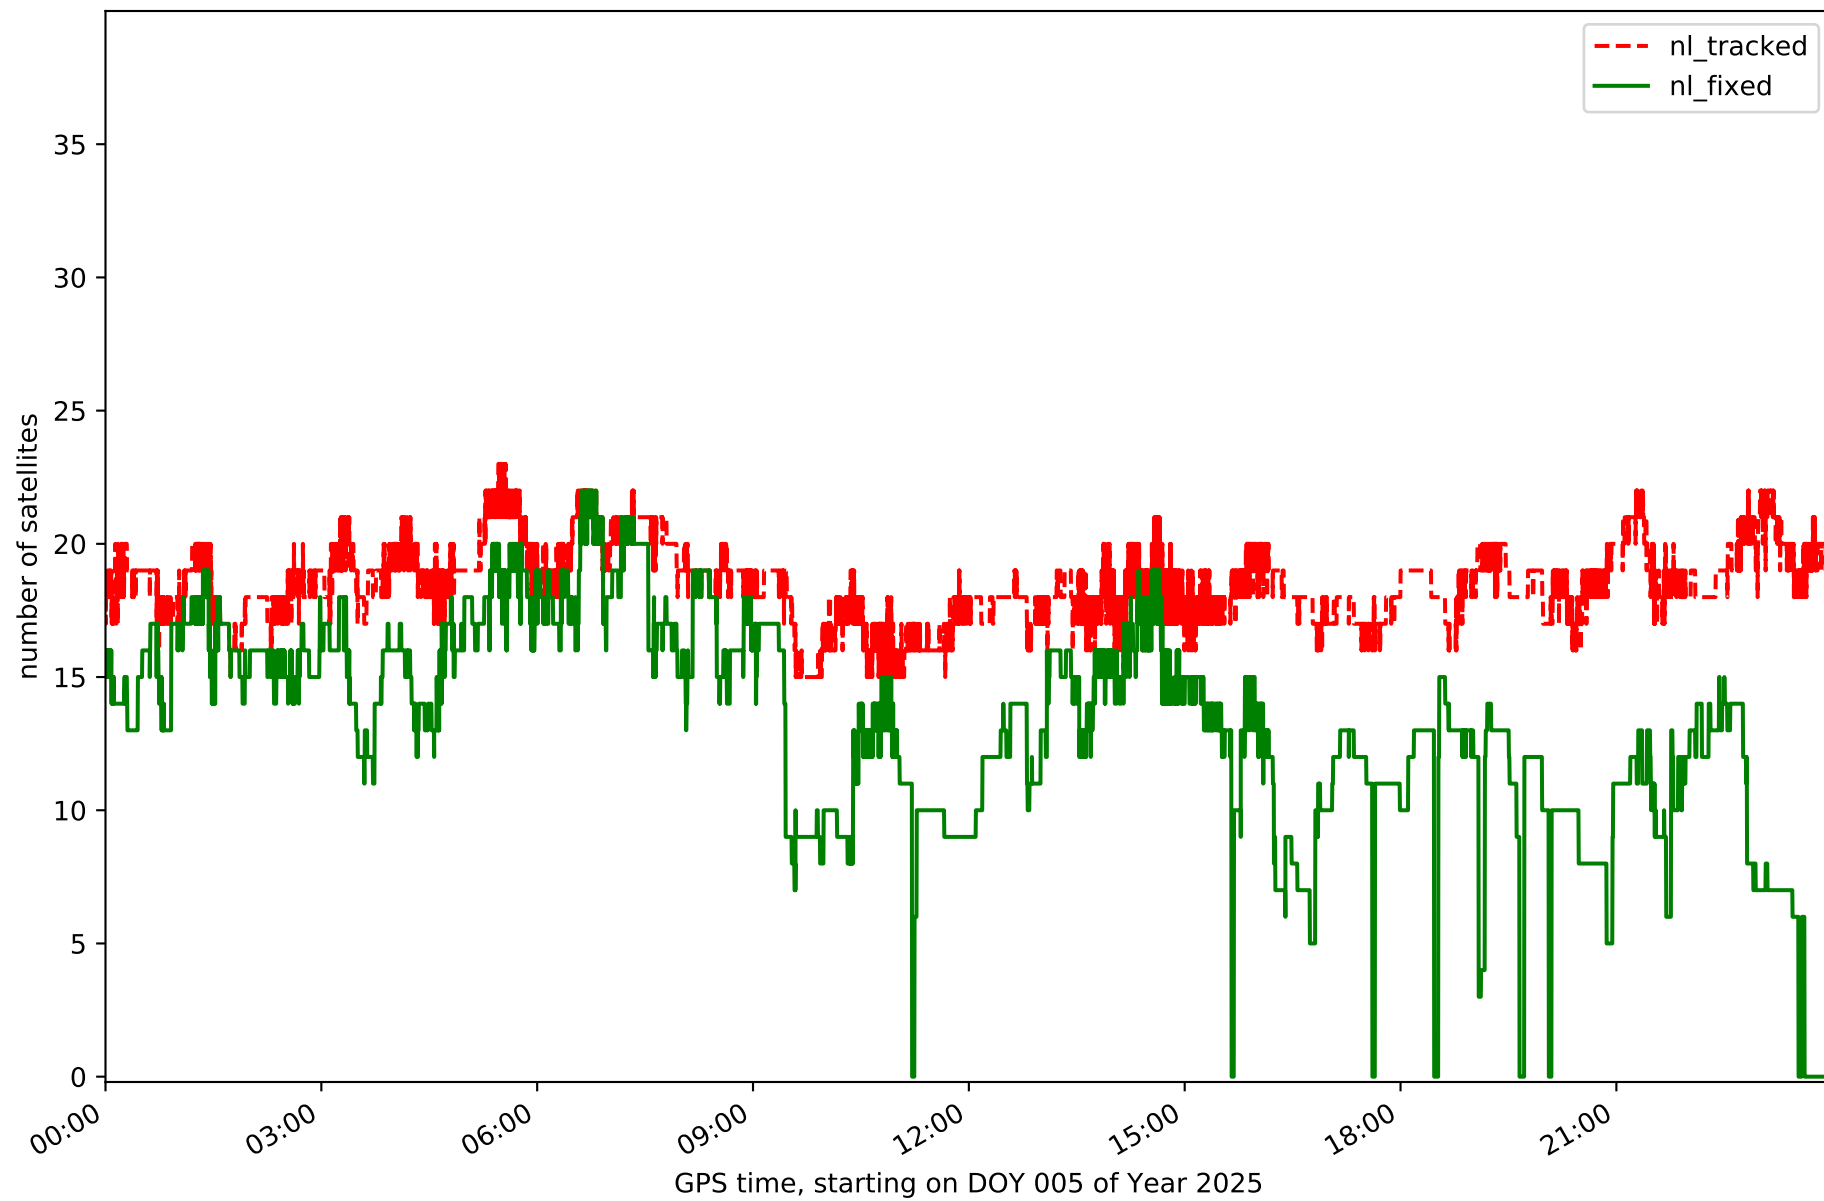


Station LZ03 in network N31T

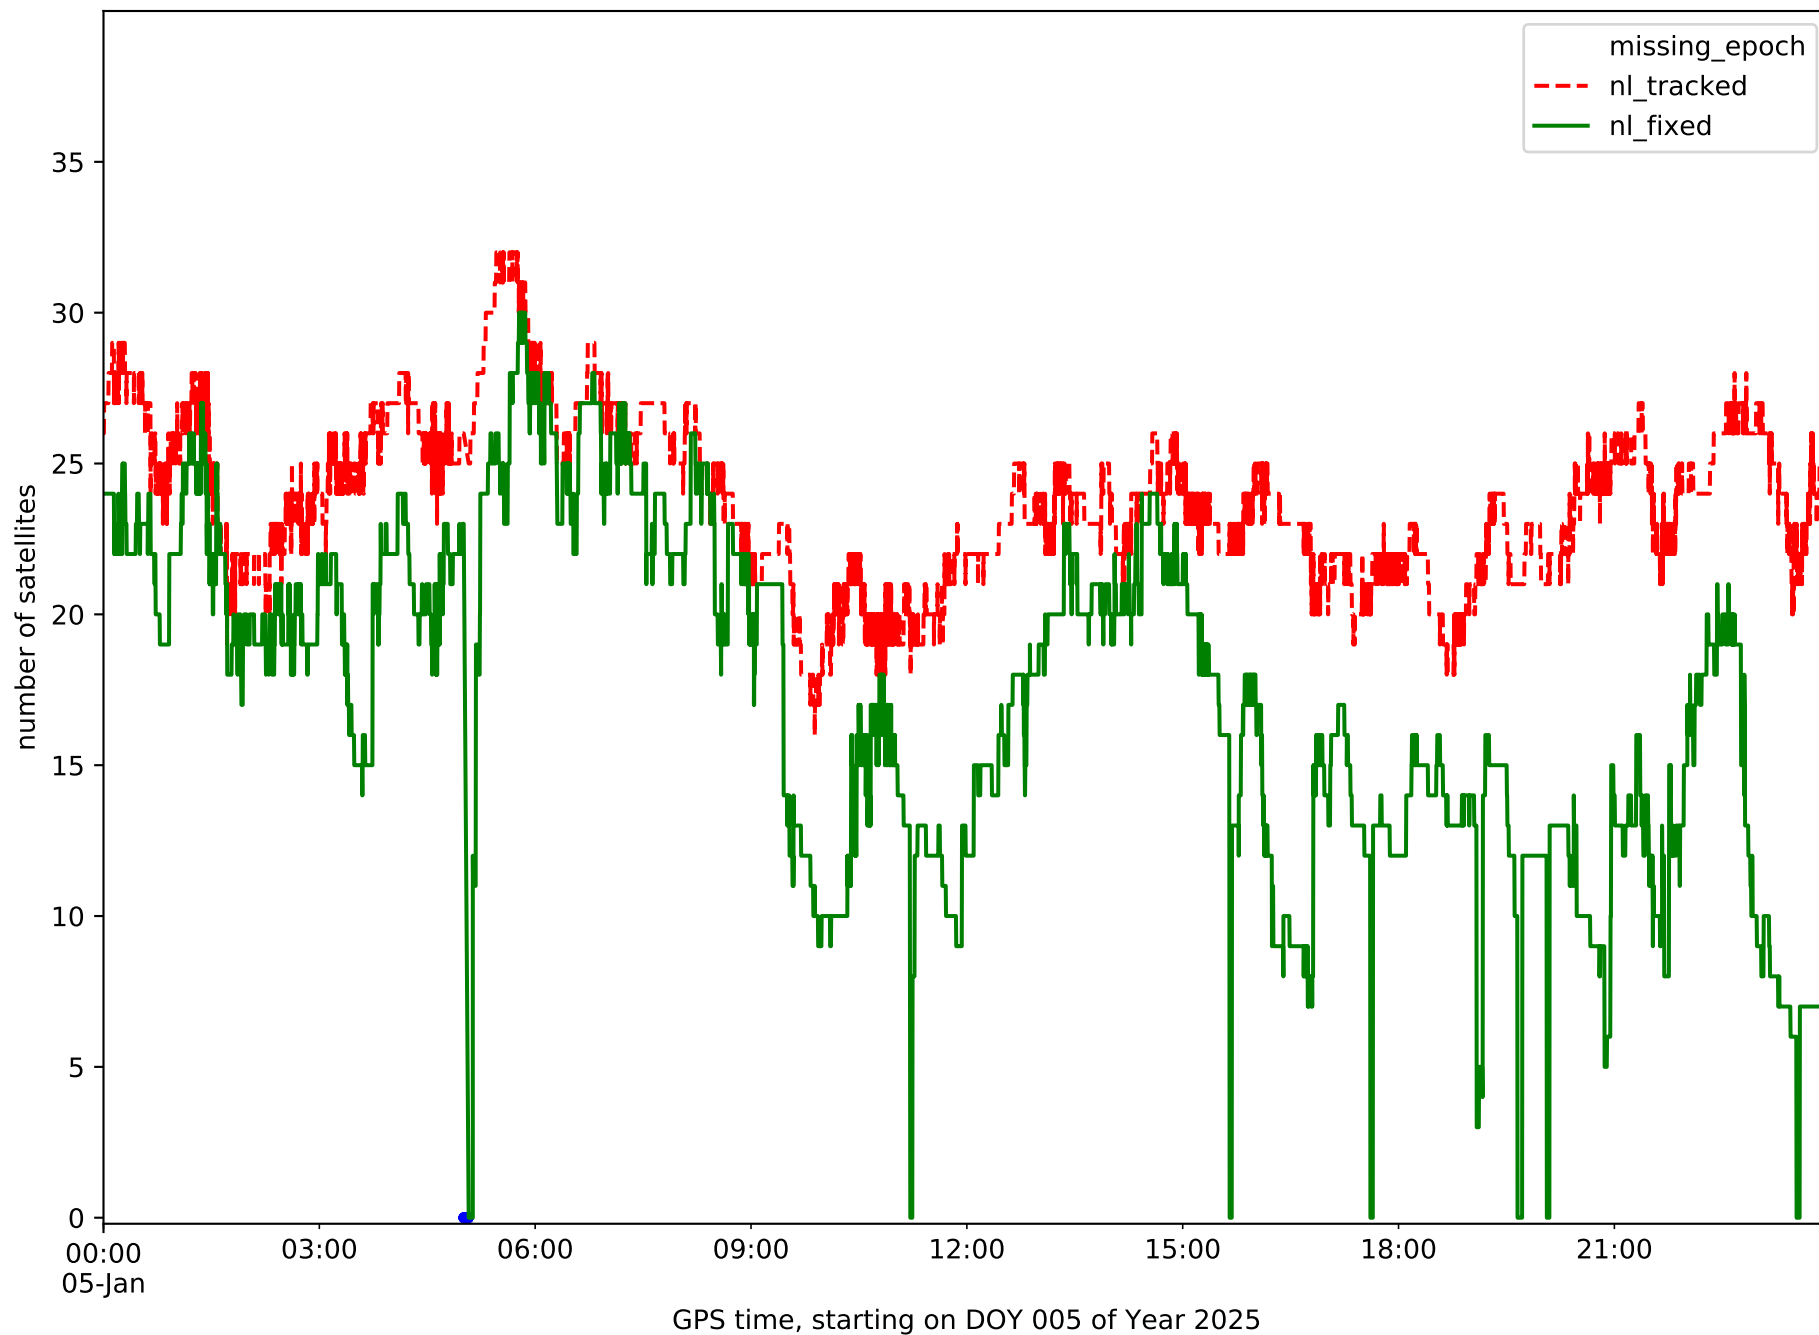

Station MASP in network N31T

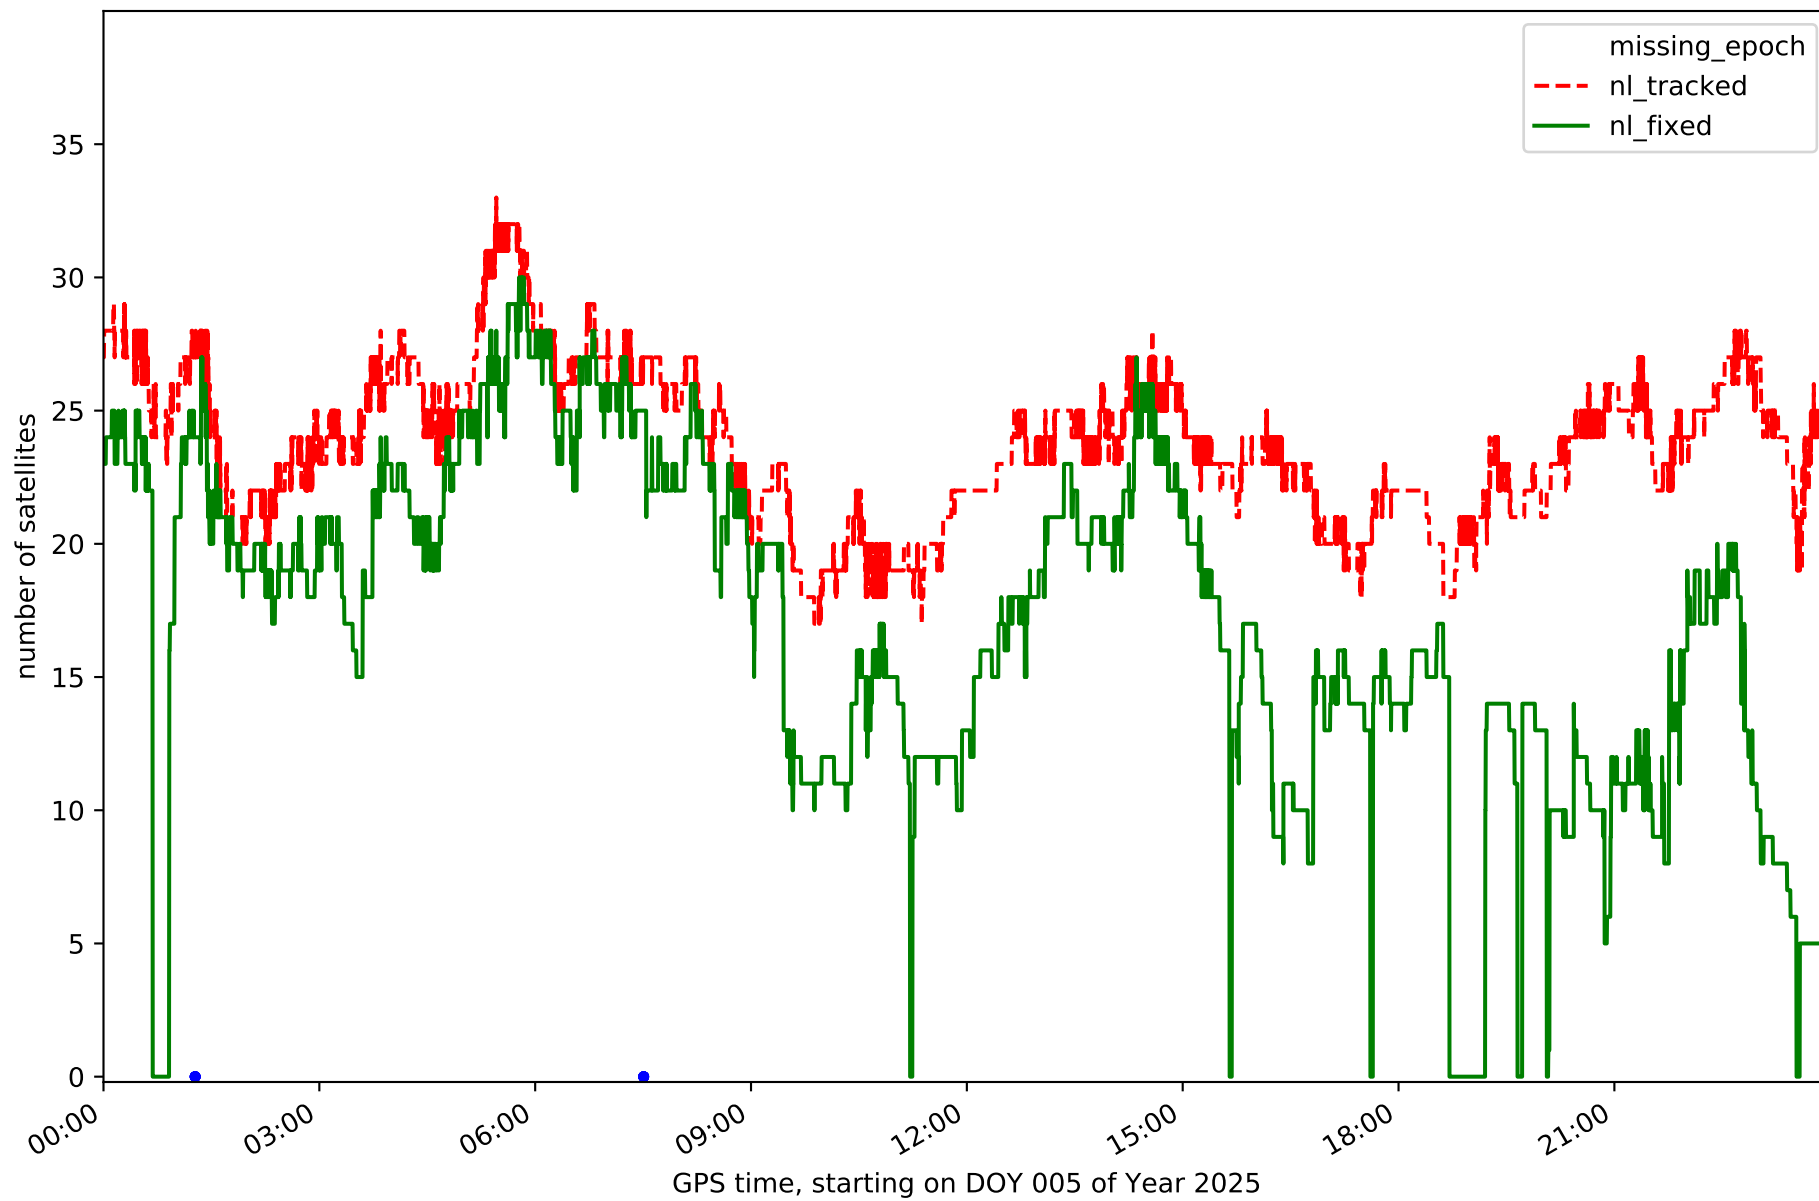


Station ULP2 in network N31T

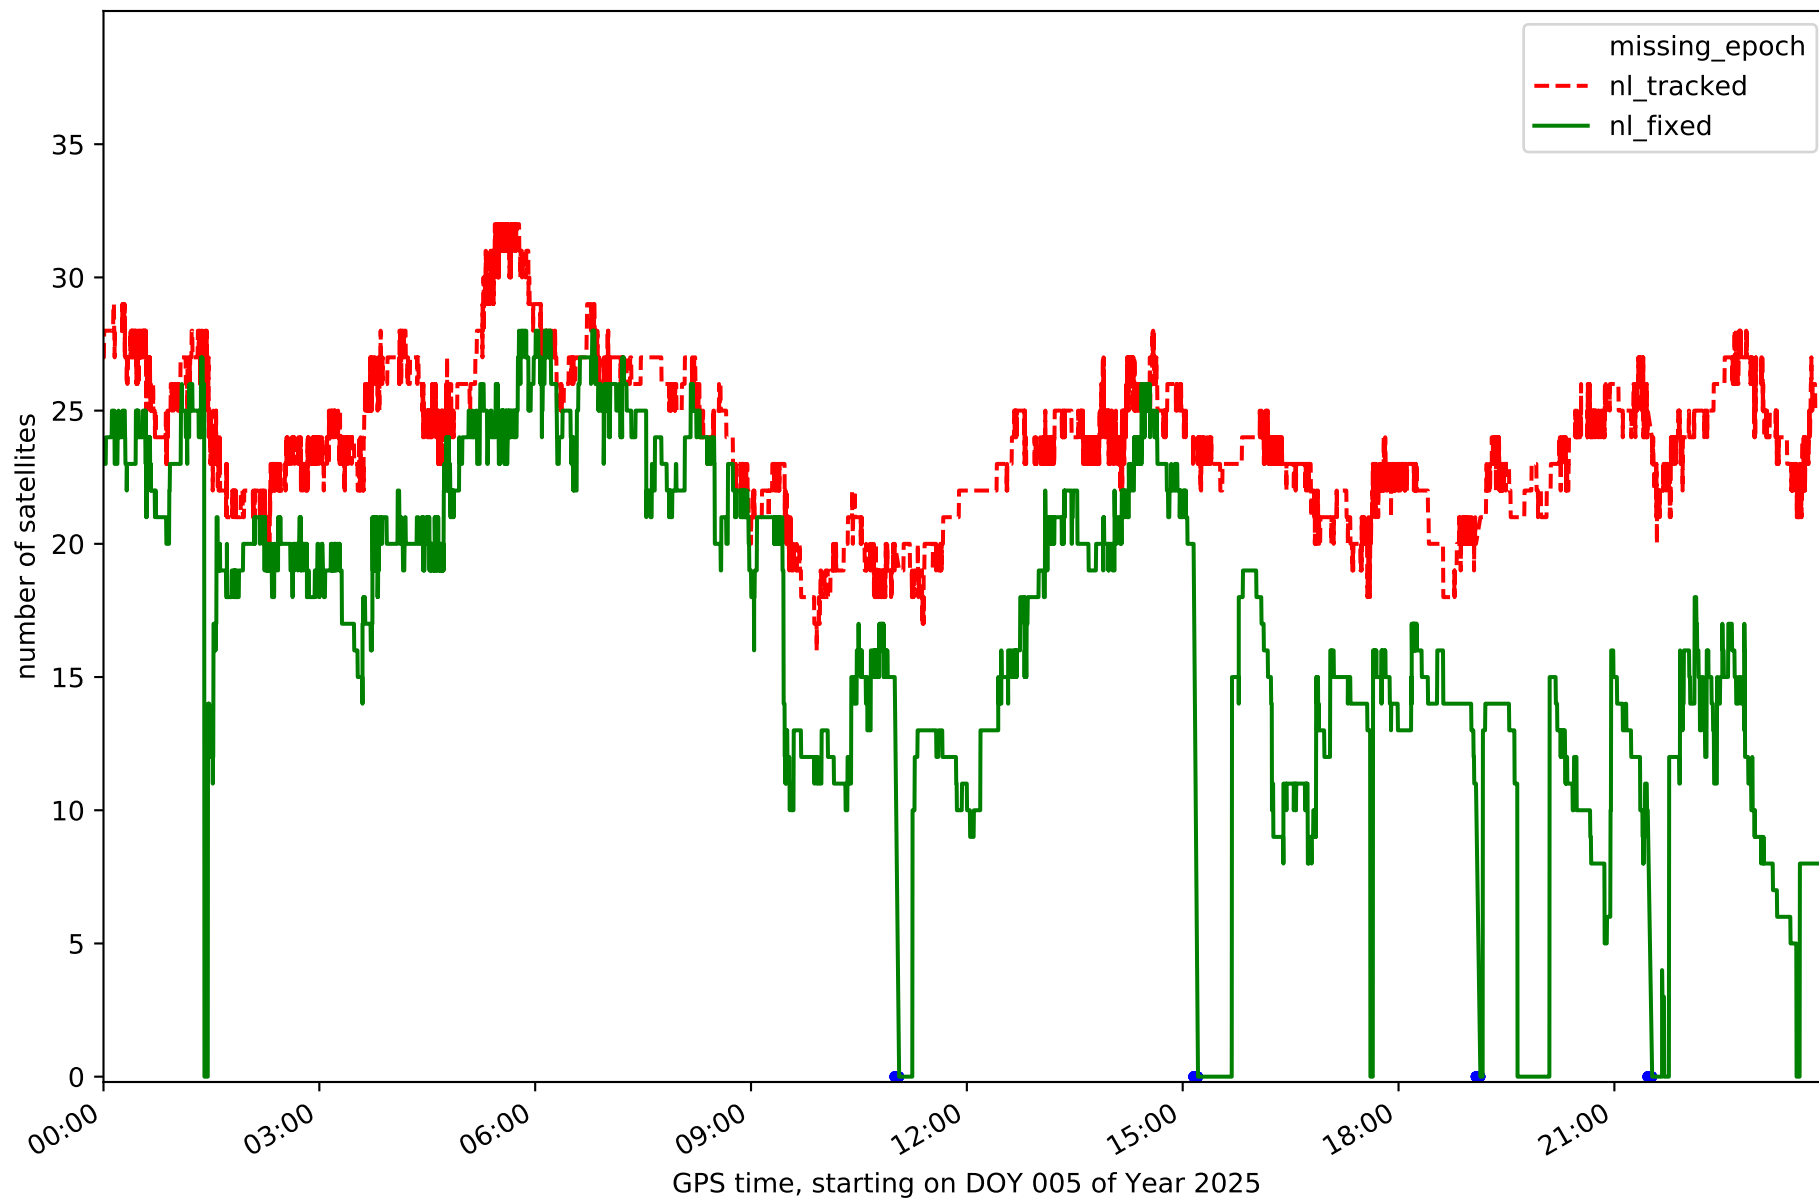





RefCheck for station FUER in network N31T

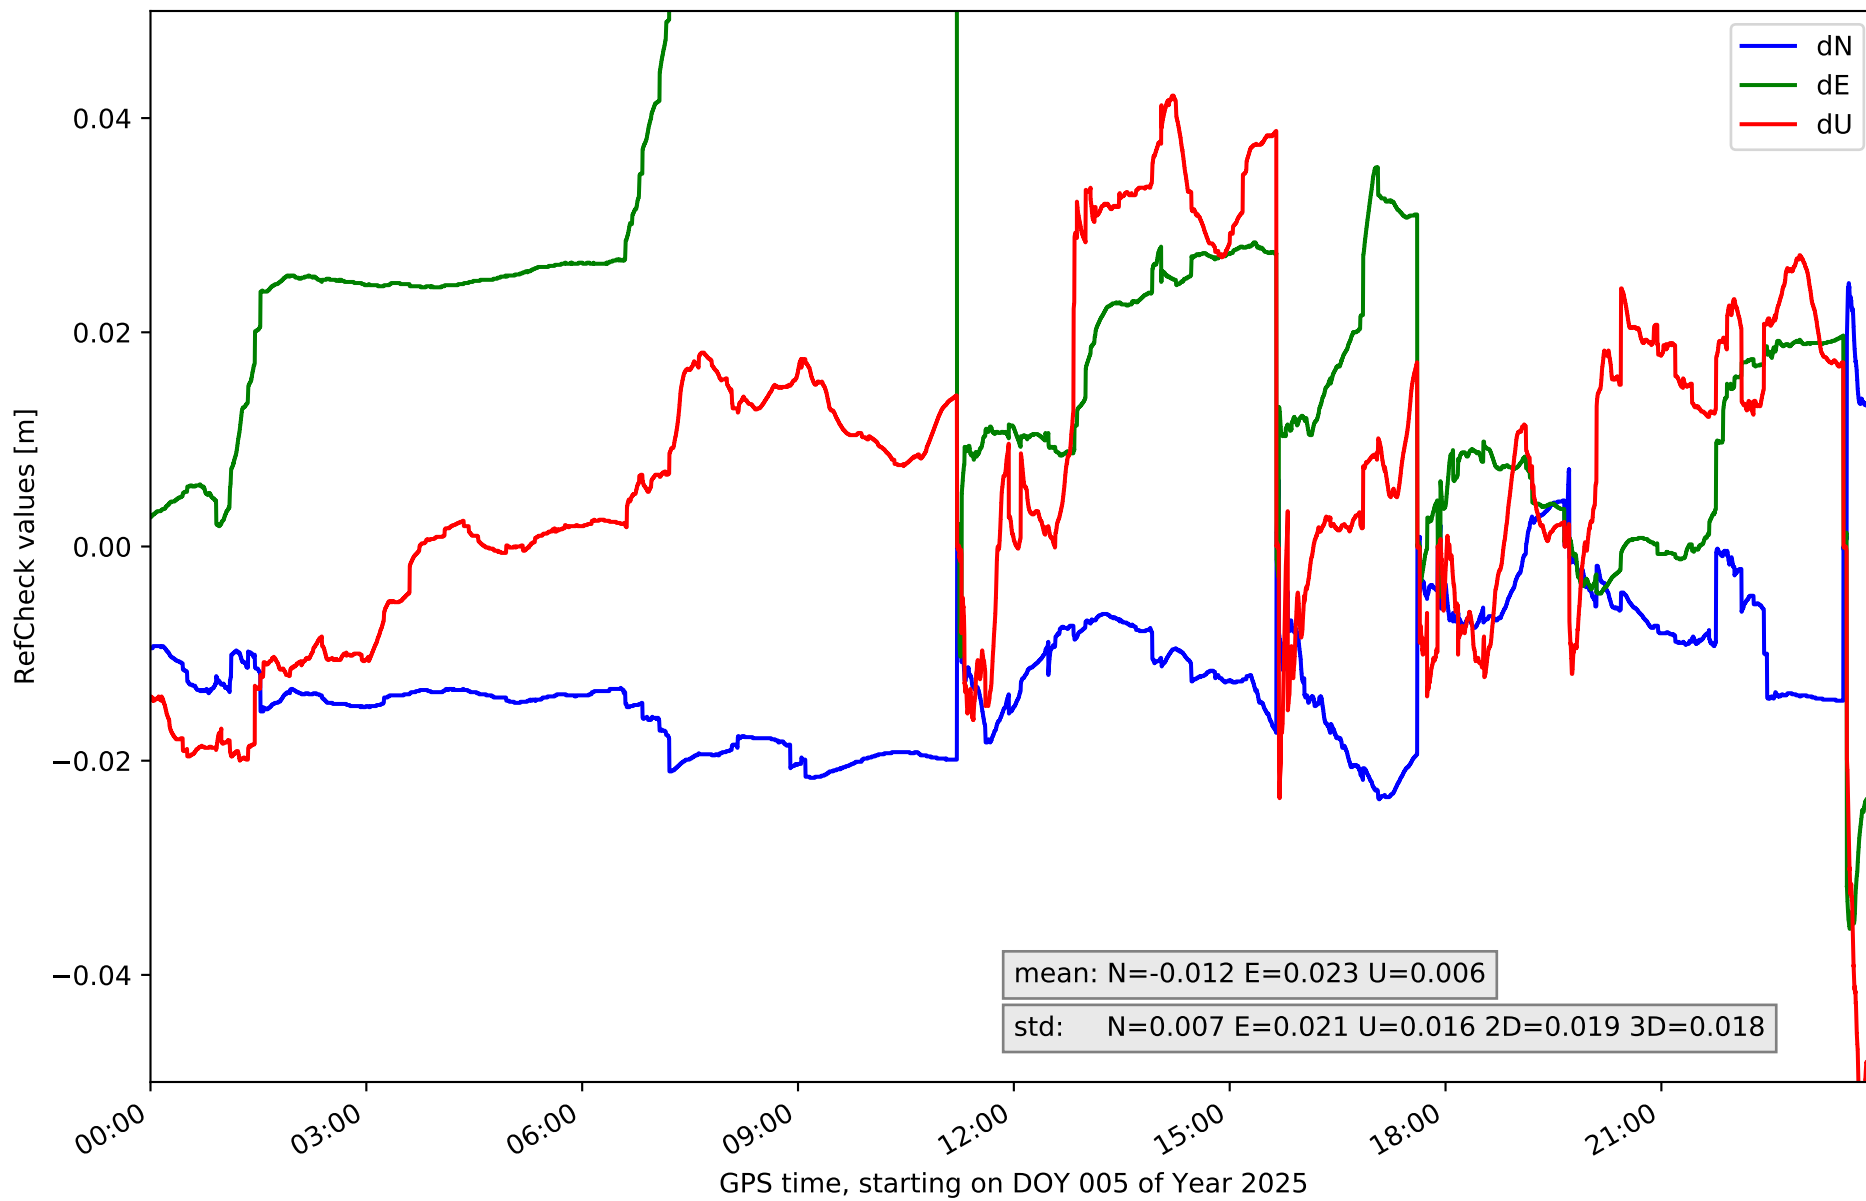


RefCheck for station LALA in network N31T

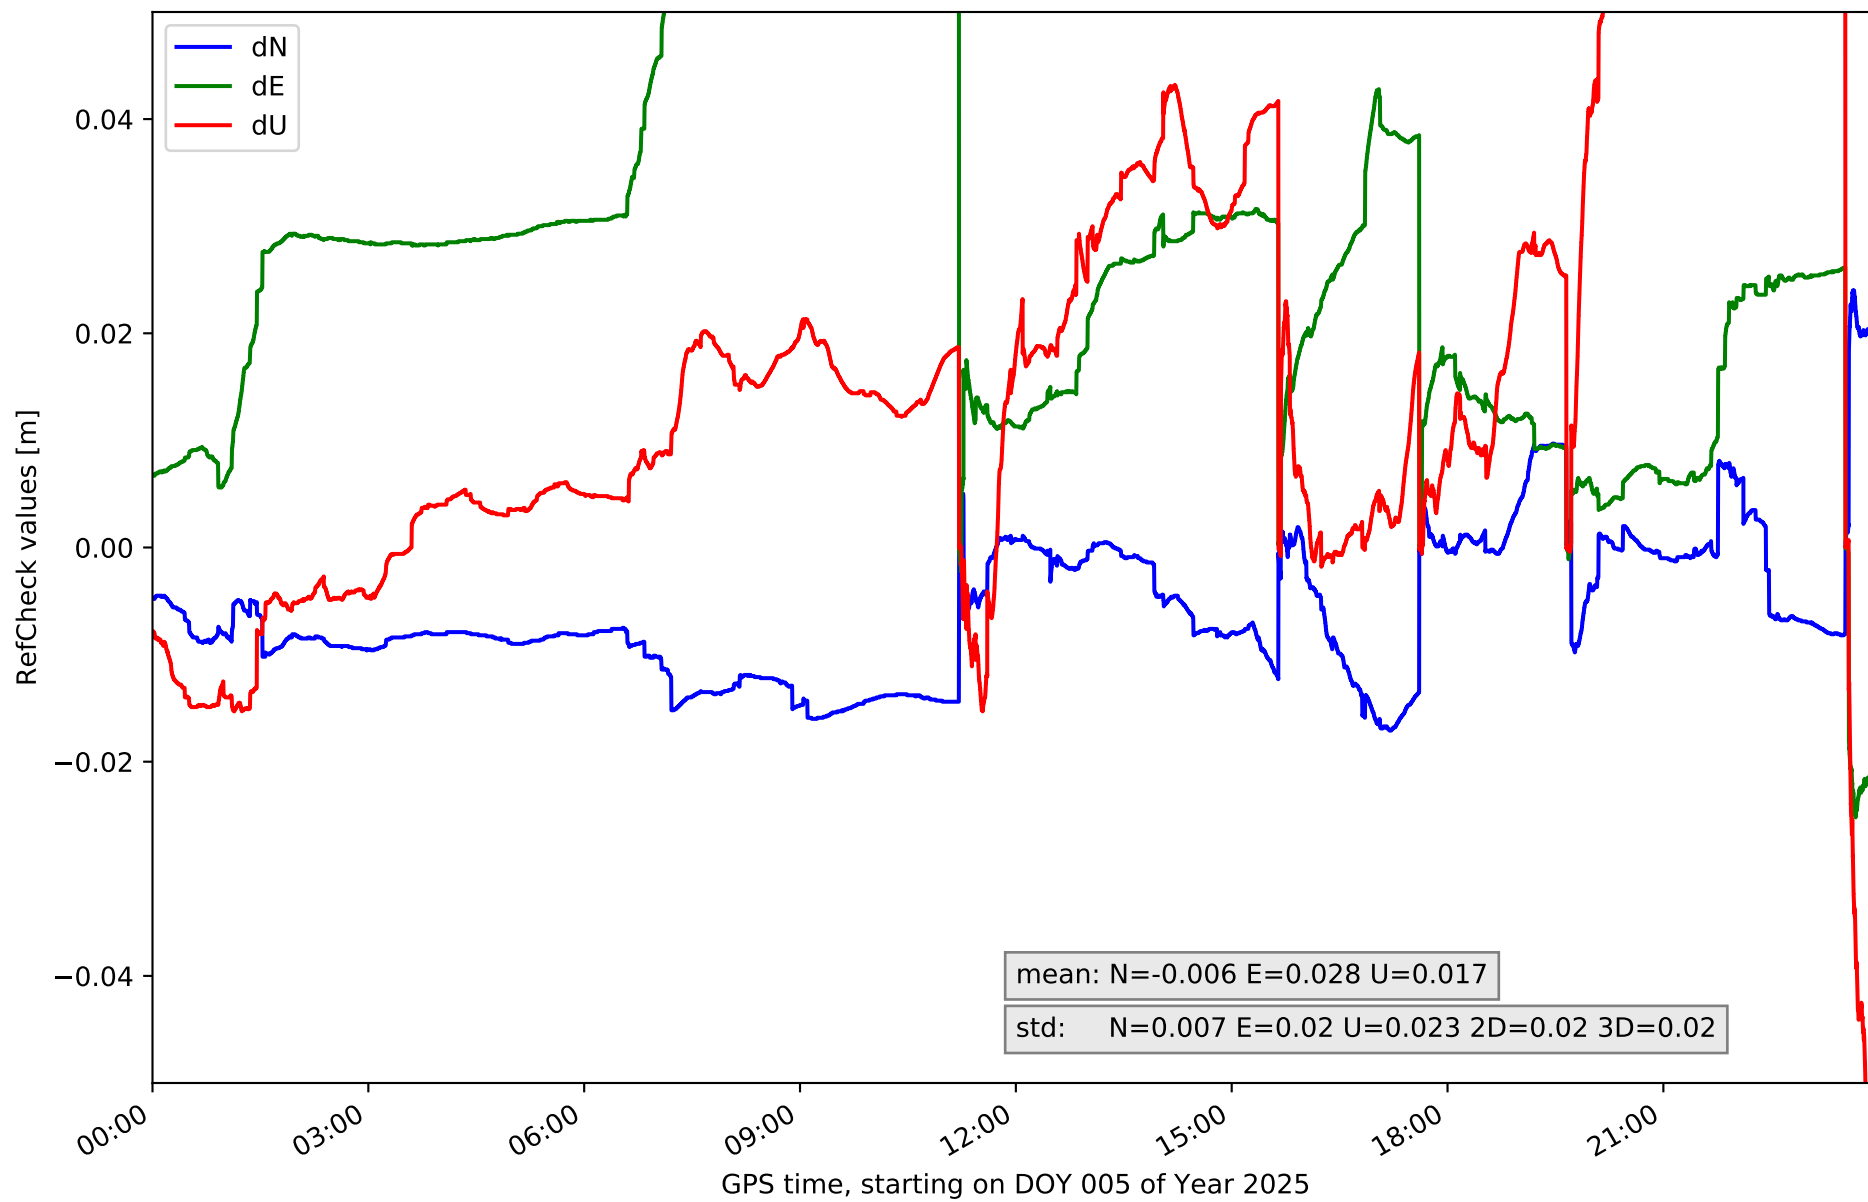


### RefCheck for station LZ01 in network N31T

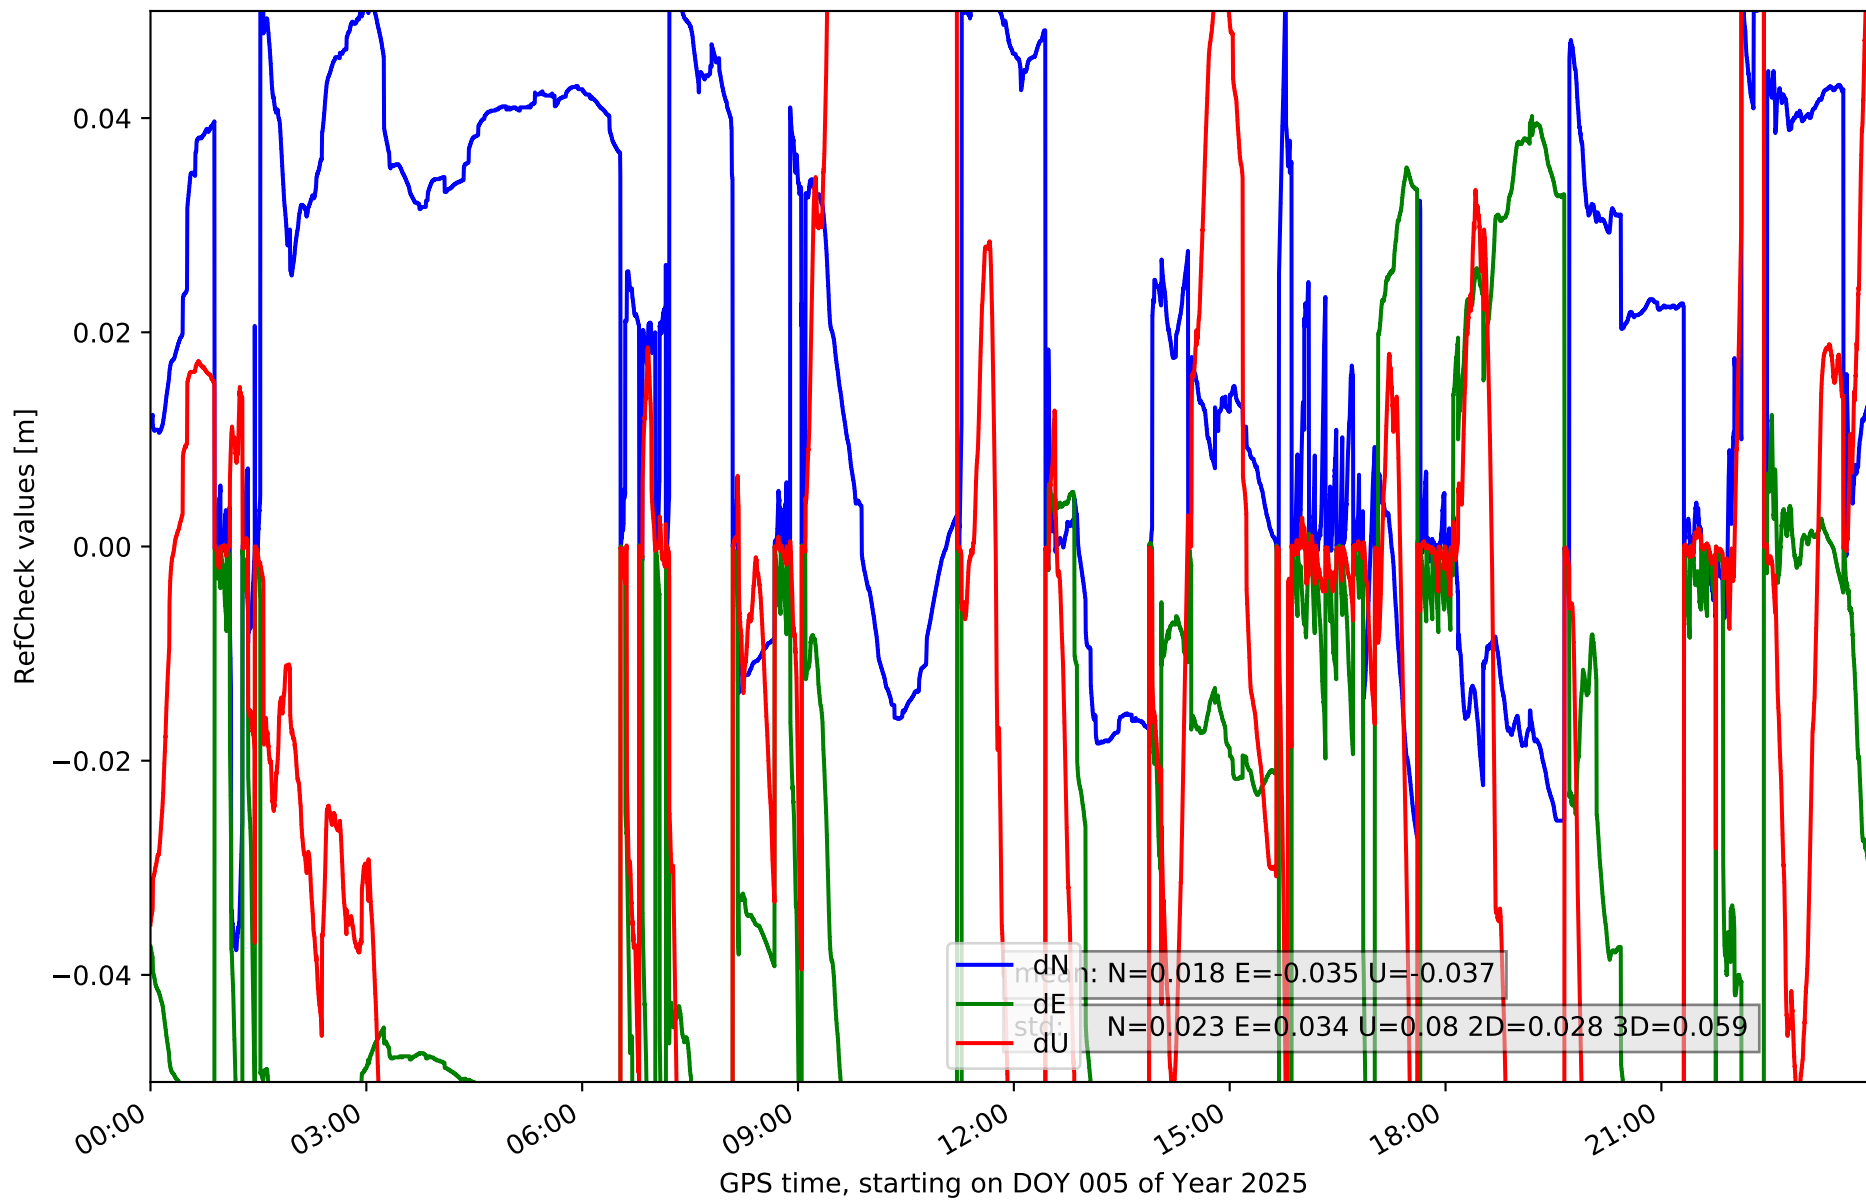


RefCheck for station LZ02 in network N31T

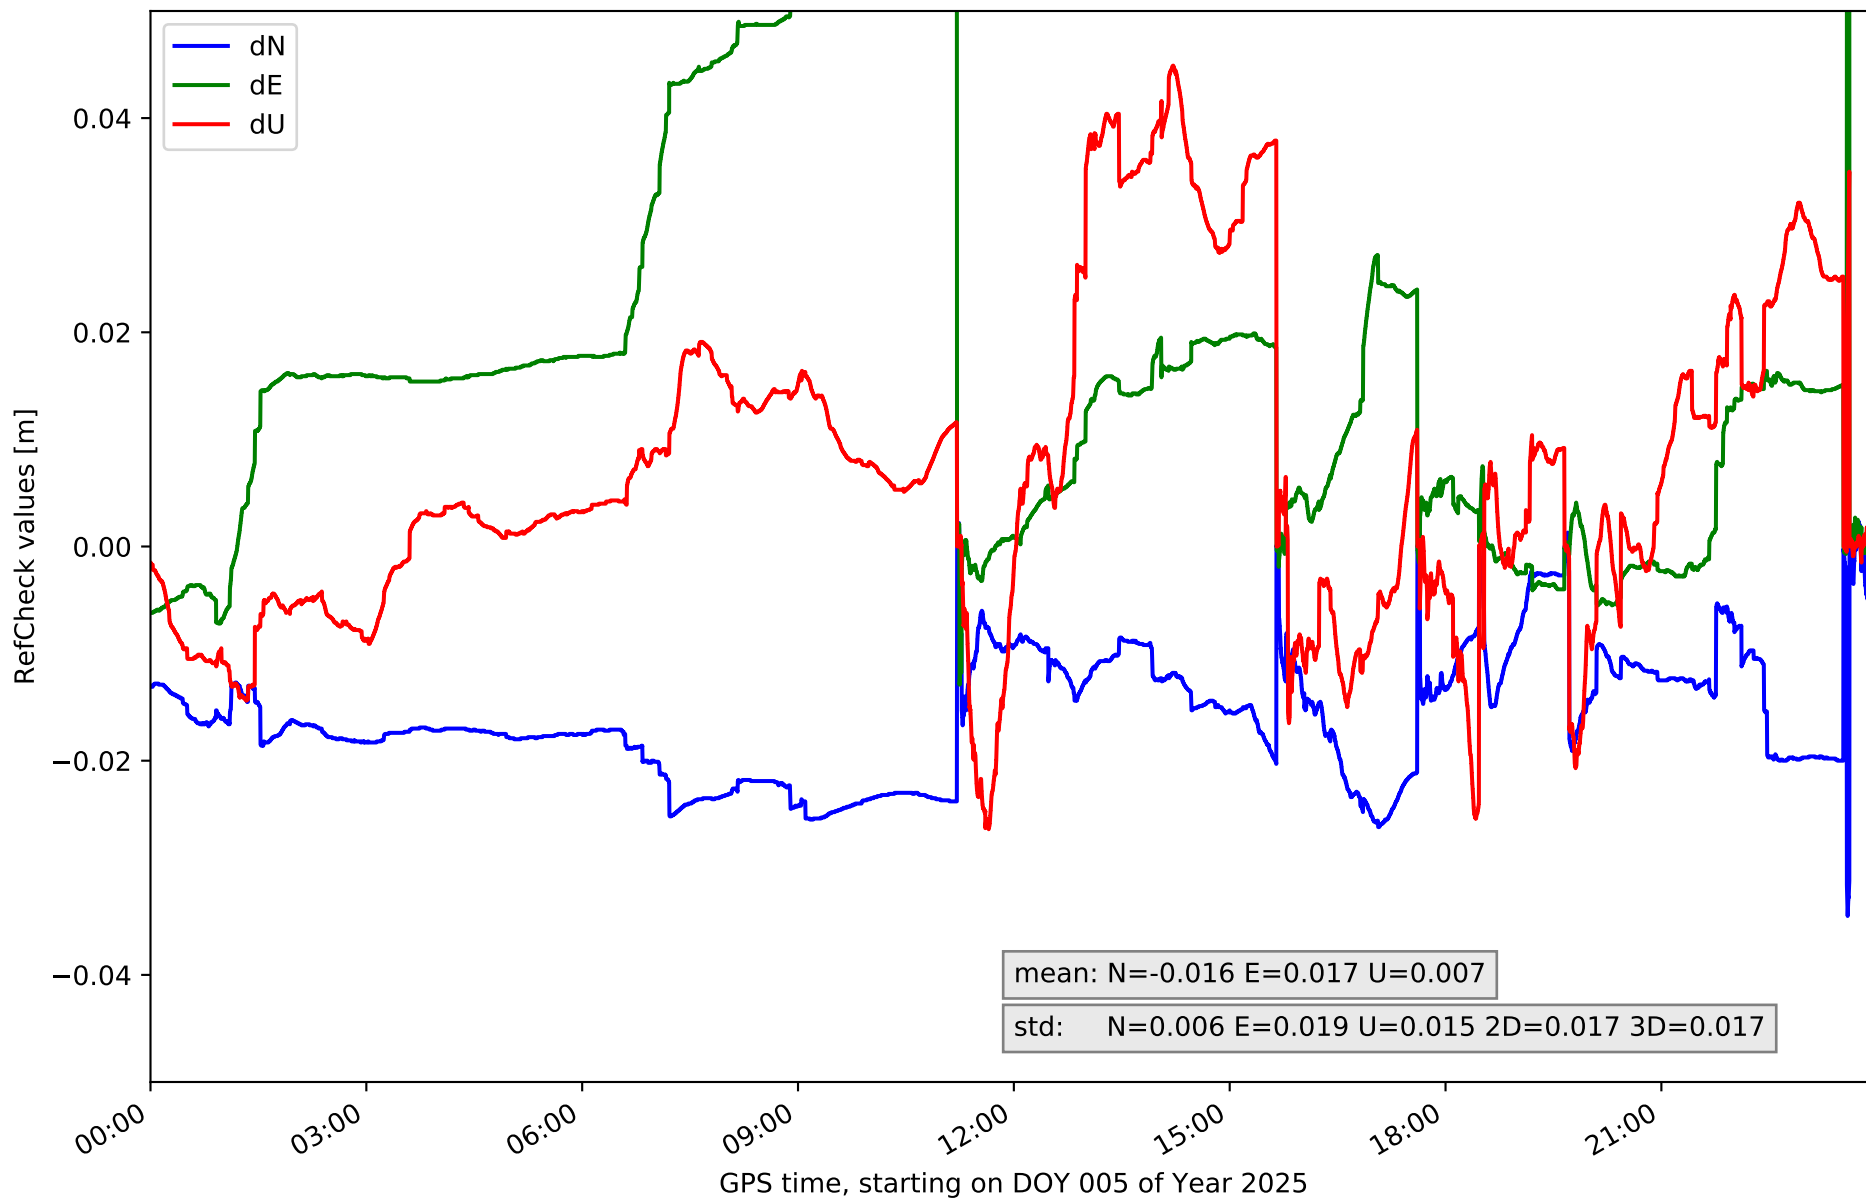


RefCheck for station LZ03 in network N31T

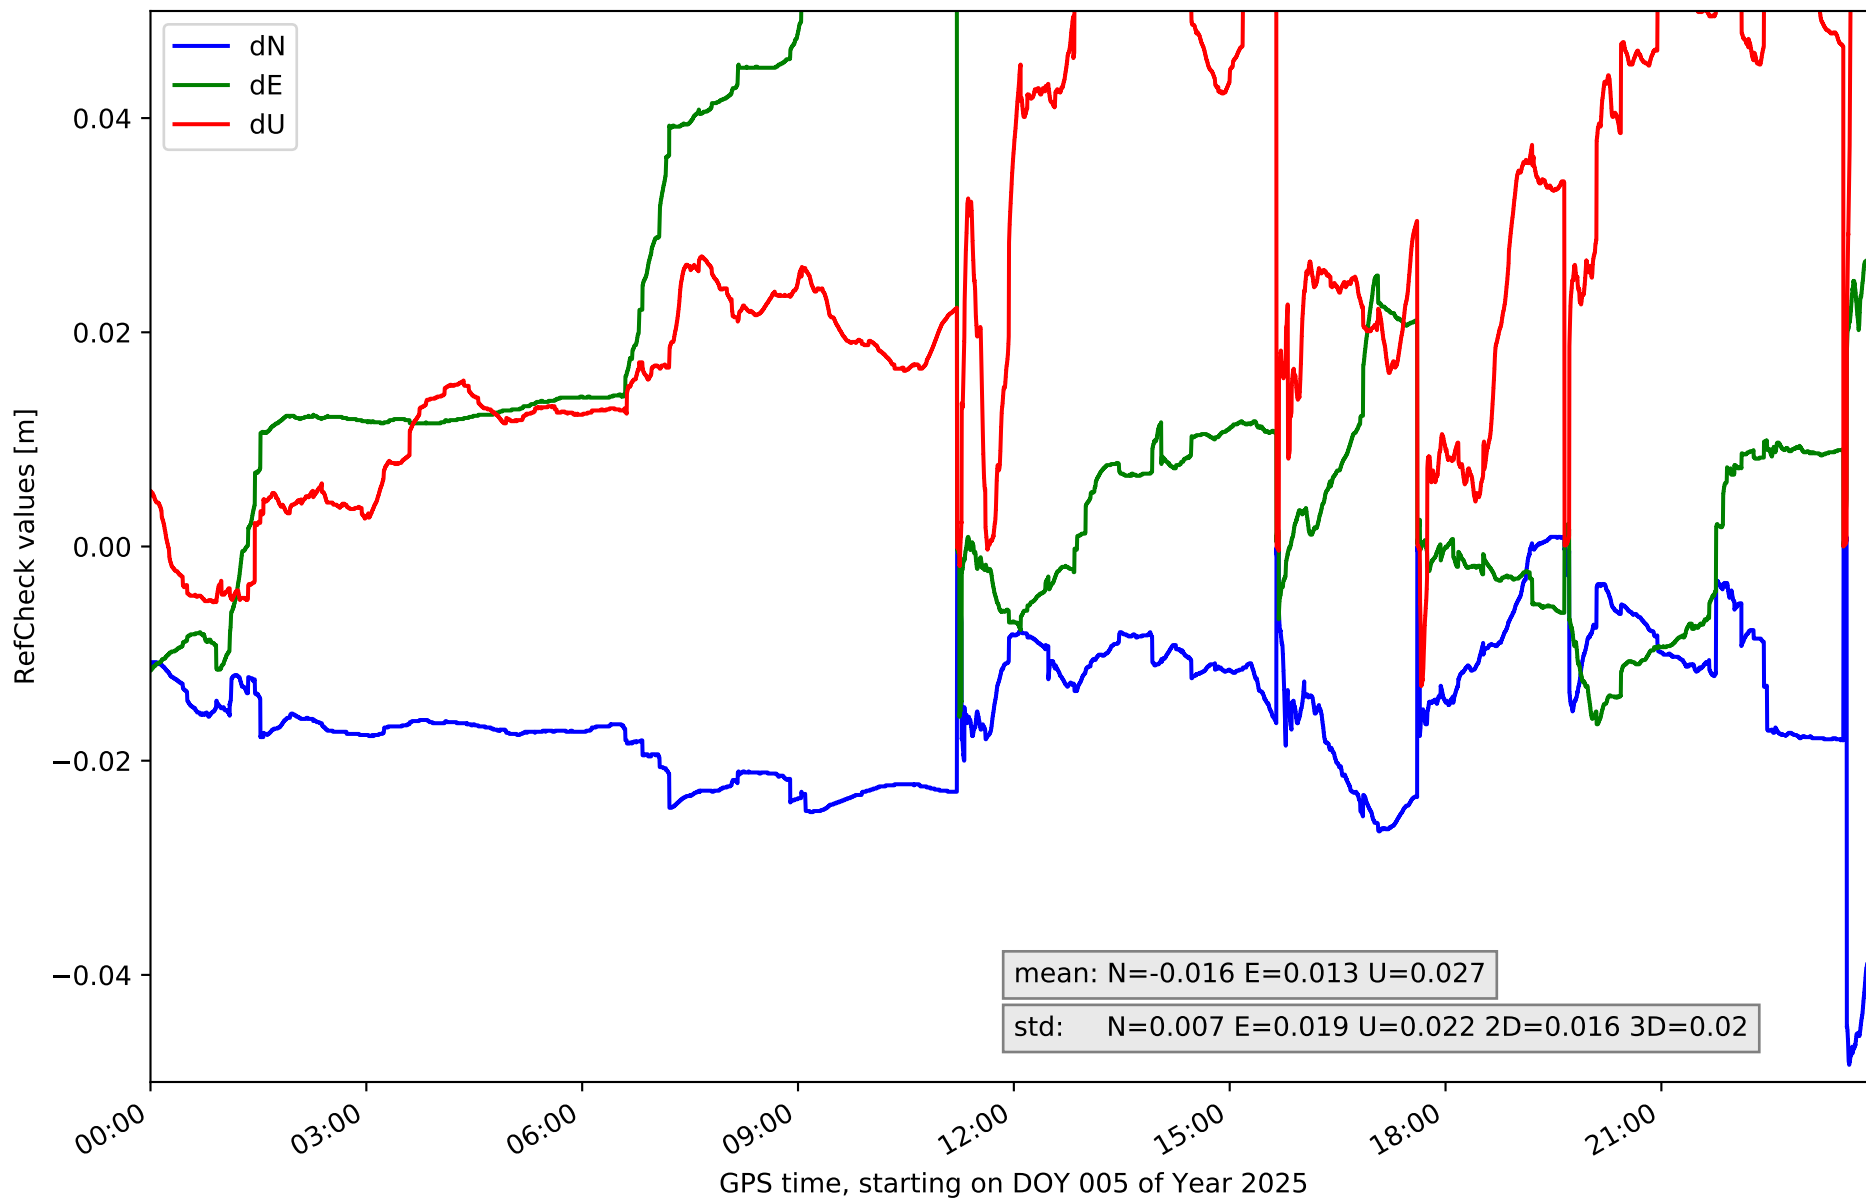

RefCheck for station MASP in network N31T

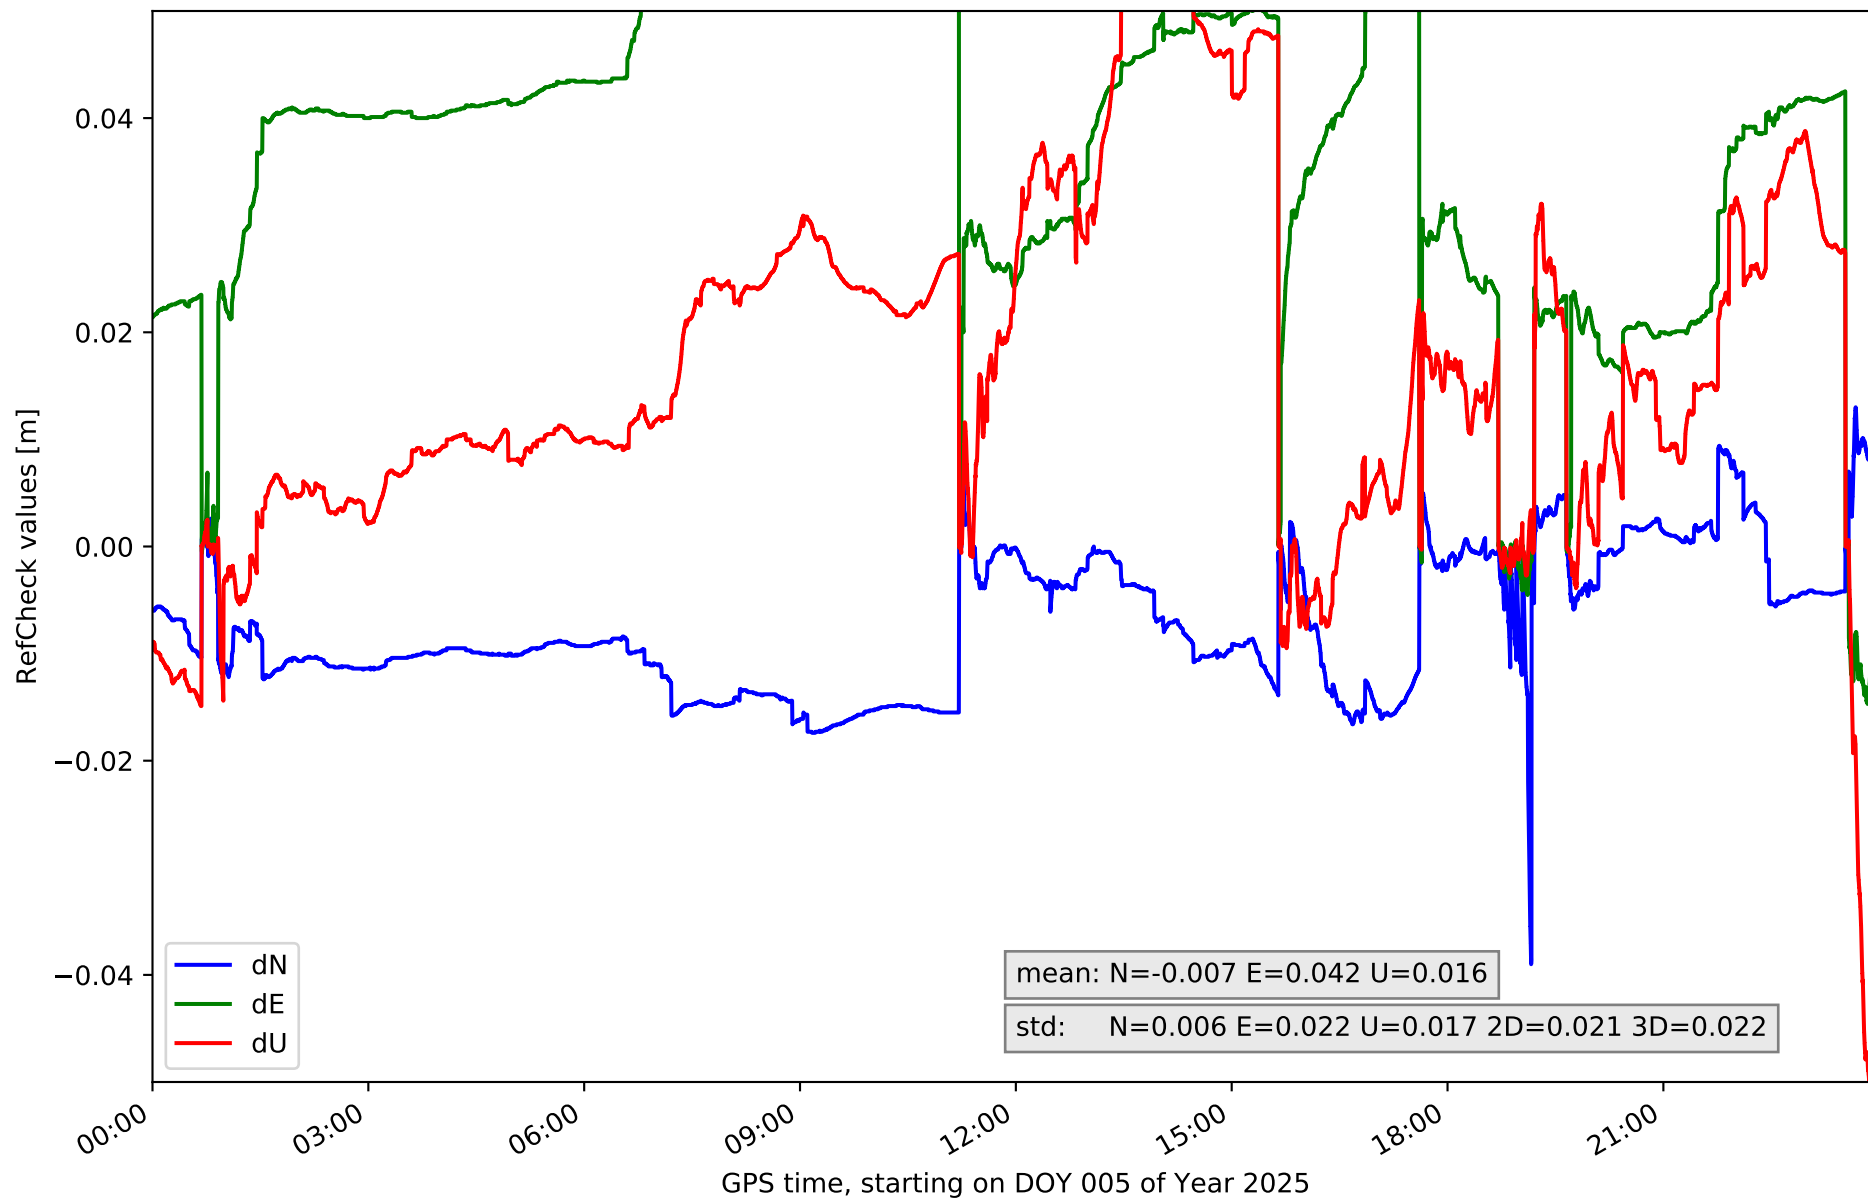

RefCheck for station ULP2 in network N31T

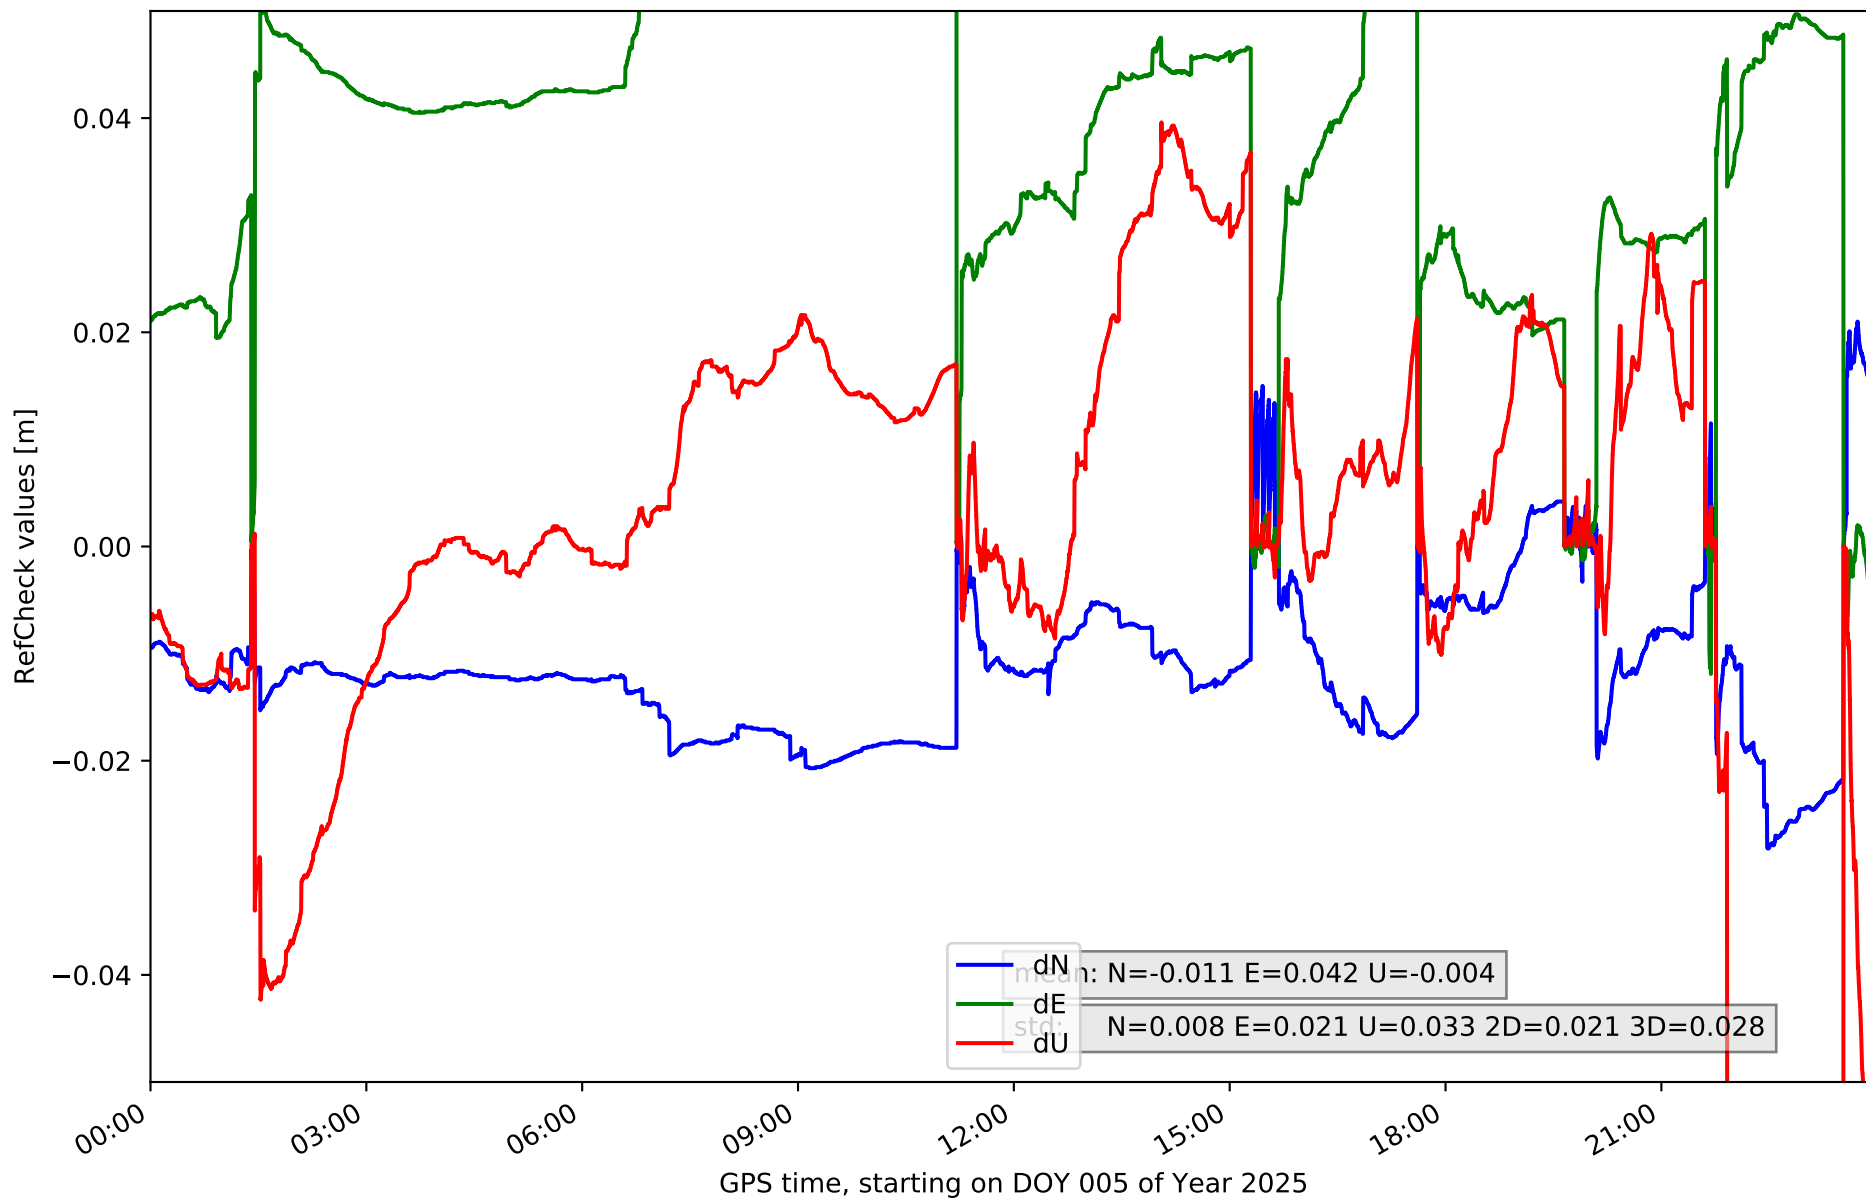

## RefCheck values for network N31T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
FUER	-0.024	0.025	0.007	-0.036	0.07	0.021	-0.067	0.042	0.016	0.019	0.018	71706	83.6	65925	76.9
LALA	-0.017	0.024	0.007	-0.025	0.074	0.02	-0.062	0.076	0.023	0.02	0.02	76227	88.9	73807	86.1
LZ01	-0.054	0.092	0.023	-0.123	0.04	0.034	-0.2	0.15	0.08	0.028	0.059	73358	85.6	72437	84.5
LZ02	-0.035	0.015	0.006	-0.013	0.061	0.019	-0.026	0.045	0.015	0.017	0.017	76552	89.3	59875	69.8
LZ03	-0.048	0.002	0.007	-0.017	0.057	0.019	-0.013	0.134	0.022	0.016	0.02	79056	92.2	74207	86.6
MASP	-0.039	0.013	0.006	-0.015	0.089	0.022	-0.054	0.059	0.017	0.021	0.022	82807	96.6	81398	94.9
ULP2	-0.028	0.021	0.008	-0.012	0.087	0.021	-0.127	0.04	0.033	0.021	0.028	82223	95.9	81386	94.9
<b>Mean</b>	-0.035	0.027	0.009	-0.034	0.068	0.022	-0.078	0.078	0.029	0.02	0.026	77418.4	90.3	72719.3	84.8
<b>Min/Max</b>	-0.054	0.092	0.023	-0.123	0.089	0.034	-0.2	0.15	0.08	0.028	0.059	82807	96.6	81398	94.9



## fixing statistic for network N31T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	74.3	73.8	52.8	87.9	81.4
considering satellites with dual-frequency fixed	69.4	67.6	47.6	85.6	77.2
considering all signals separately	71.2	68.0	47.6	85.8	76.2