

summary for network N32T

timeperiod chosen: from 2025-03-27-00:00:00 until 2025-03-27-21:21:54

average update rate (durations larger than 15 seconds considered as observation gap): 2.4 seconds


average fixing percentage with threshold set to 0.3: 88.5 percent

stations available: 15 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.508
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

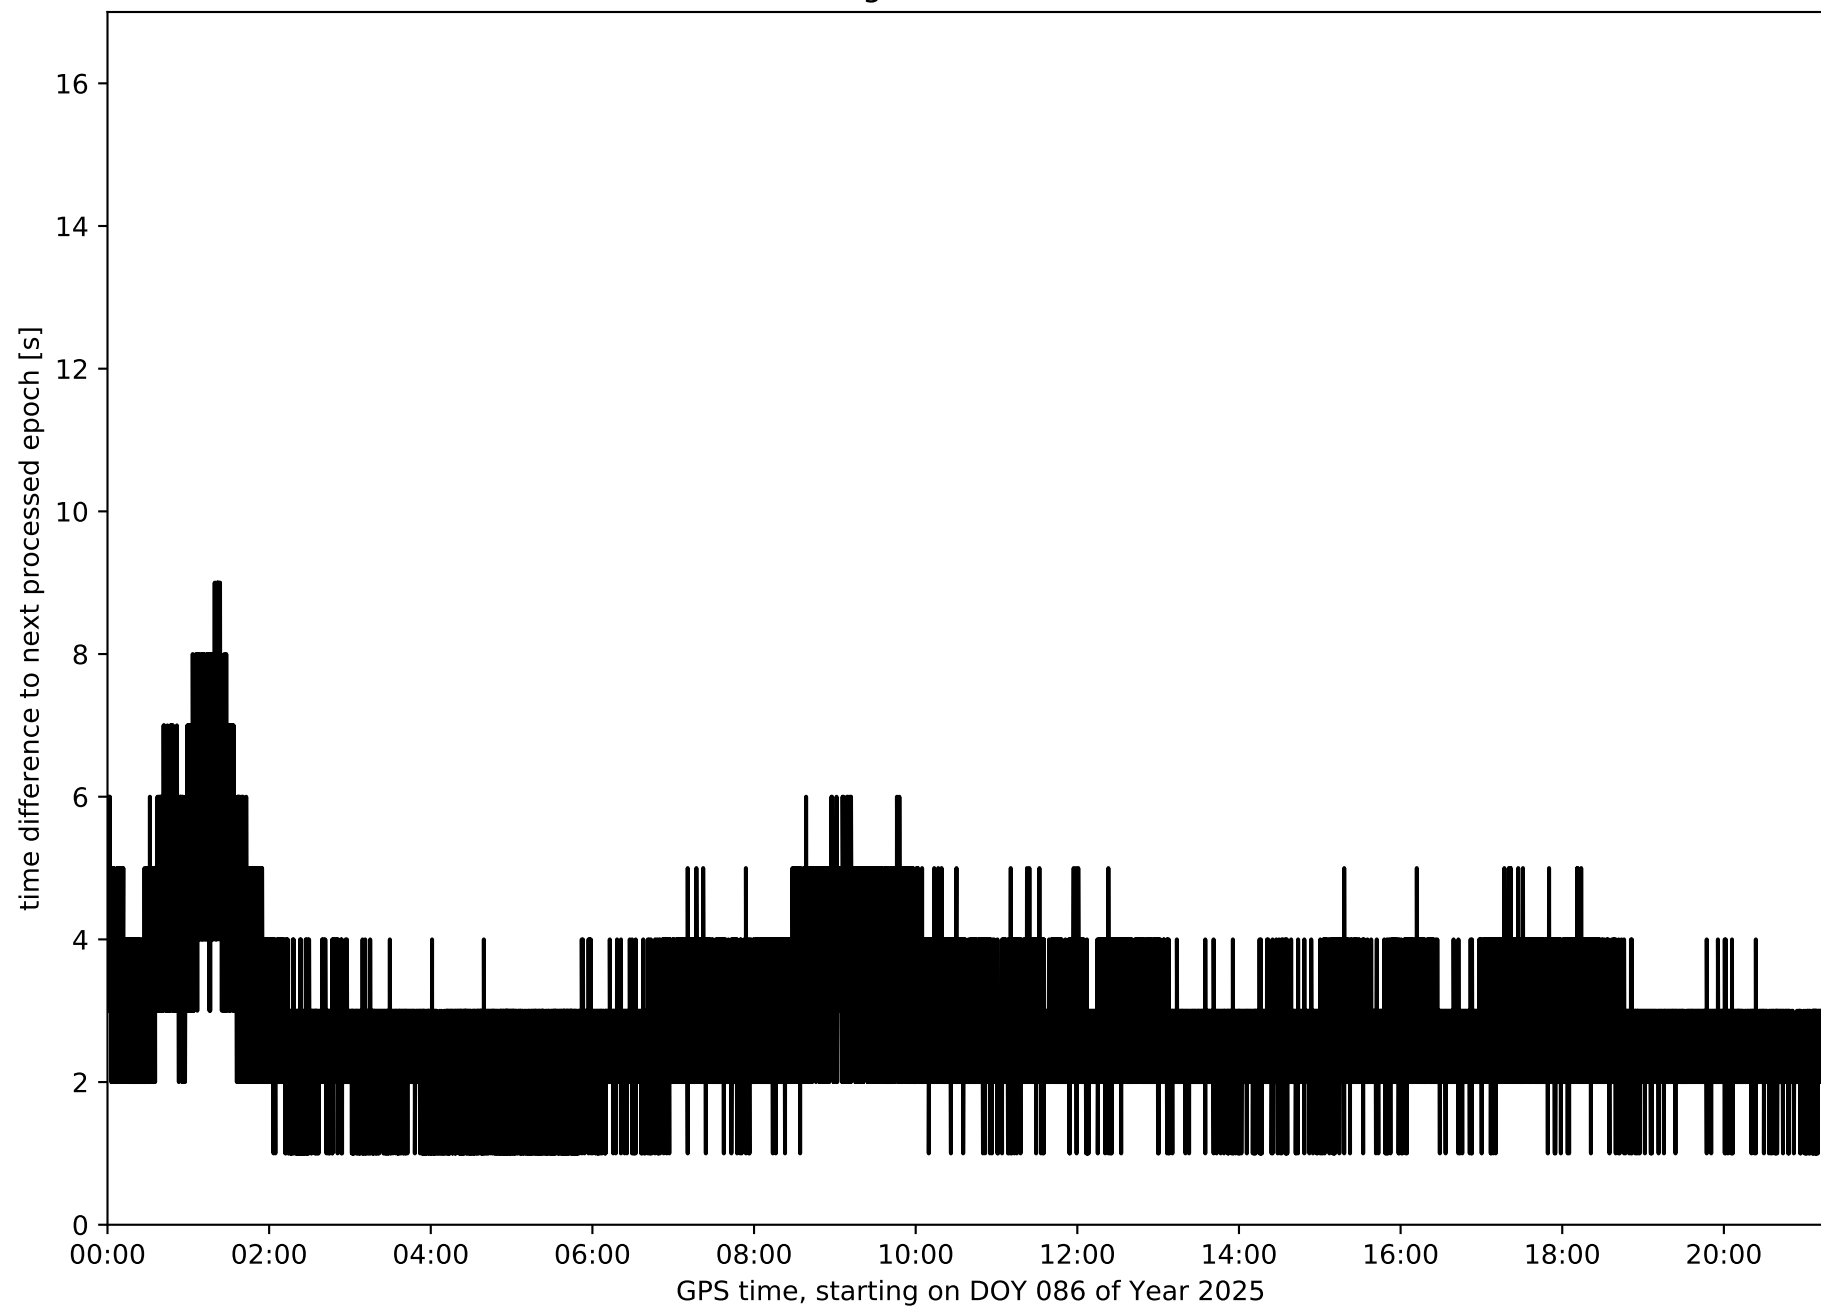


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

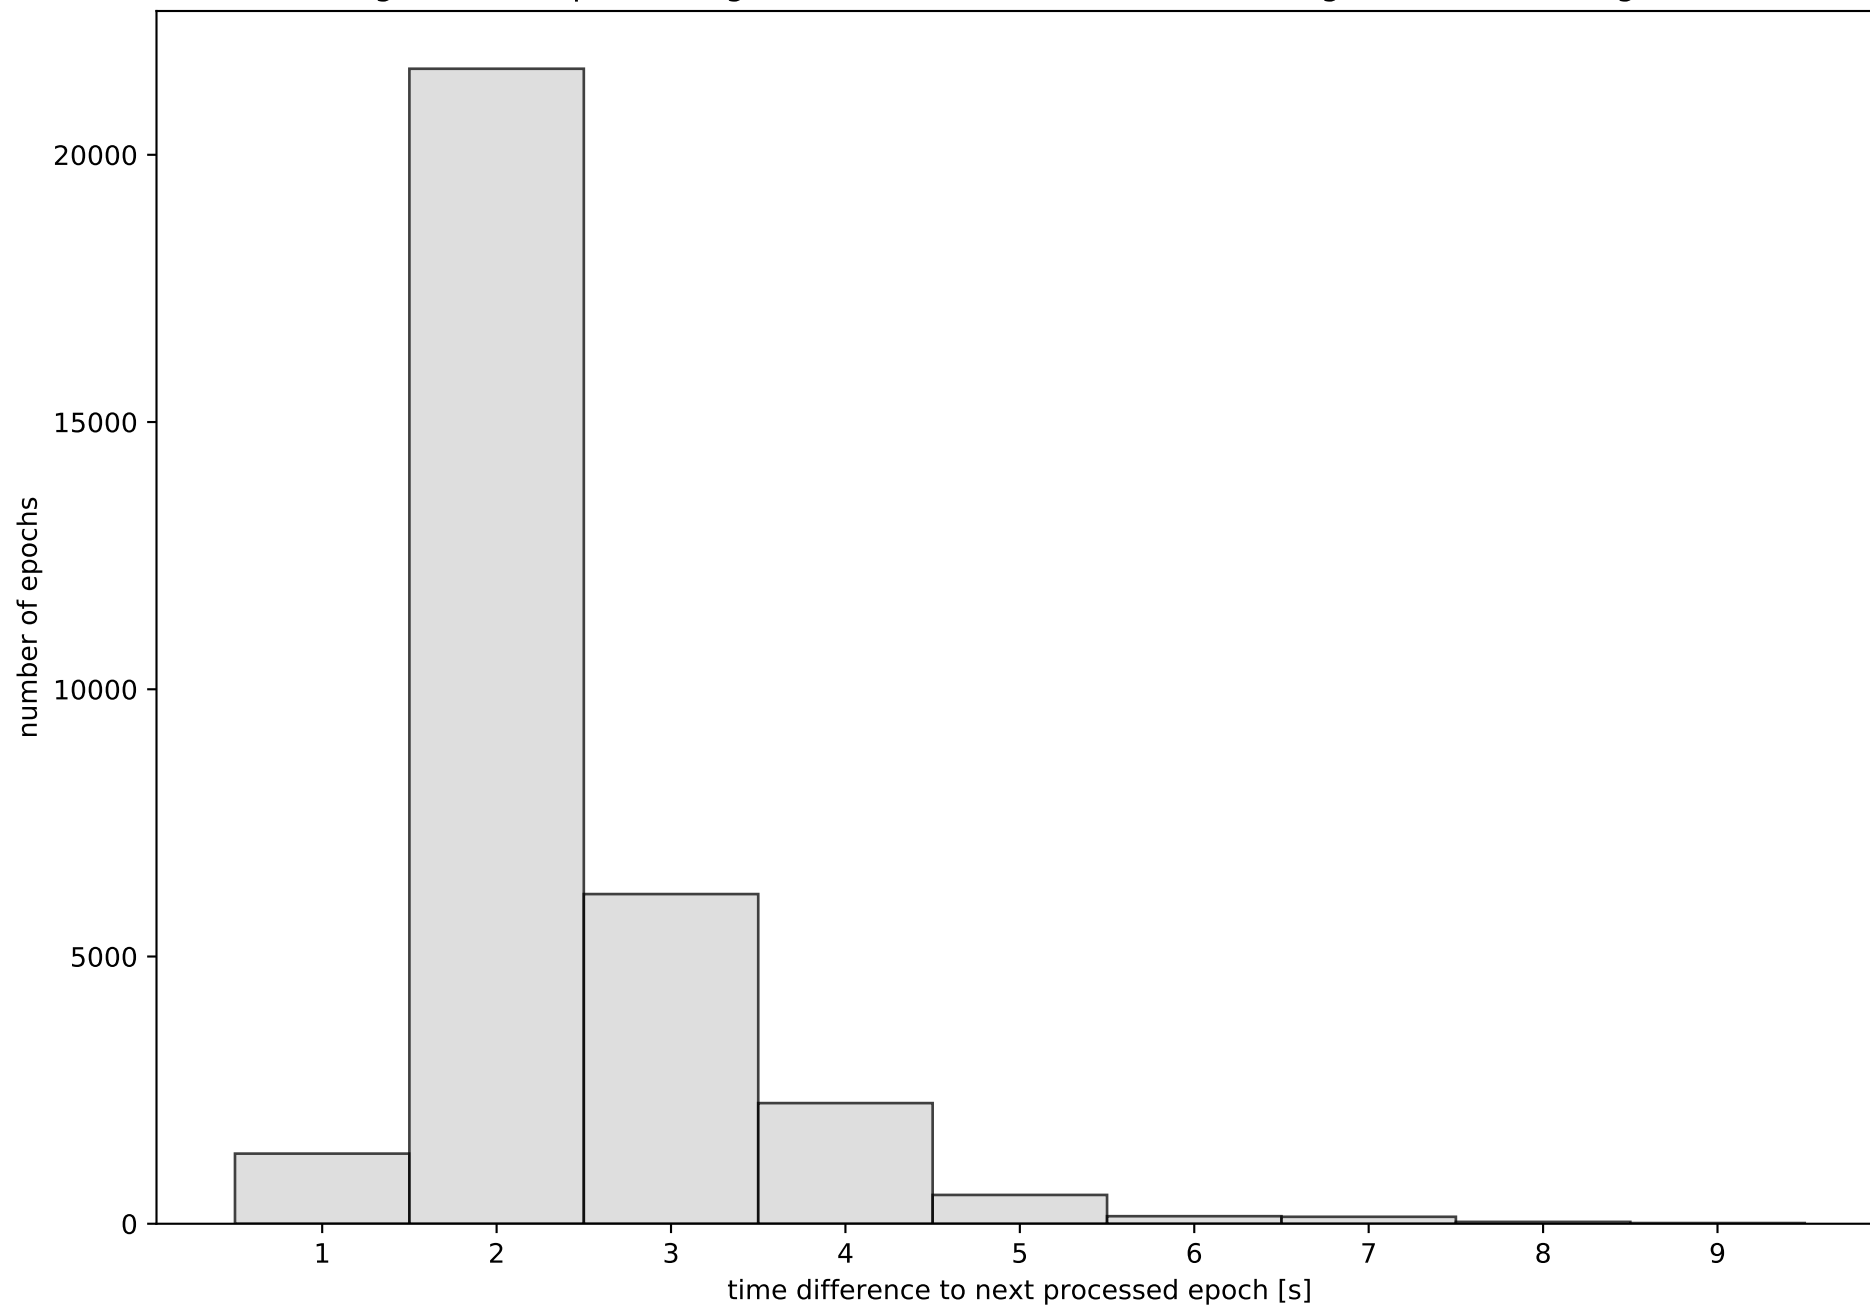


Network N32T with threshold set to 0.3

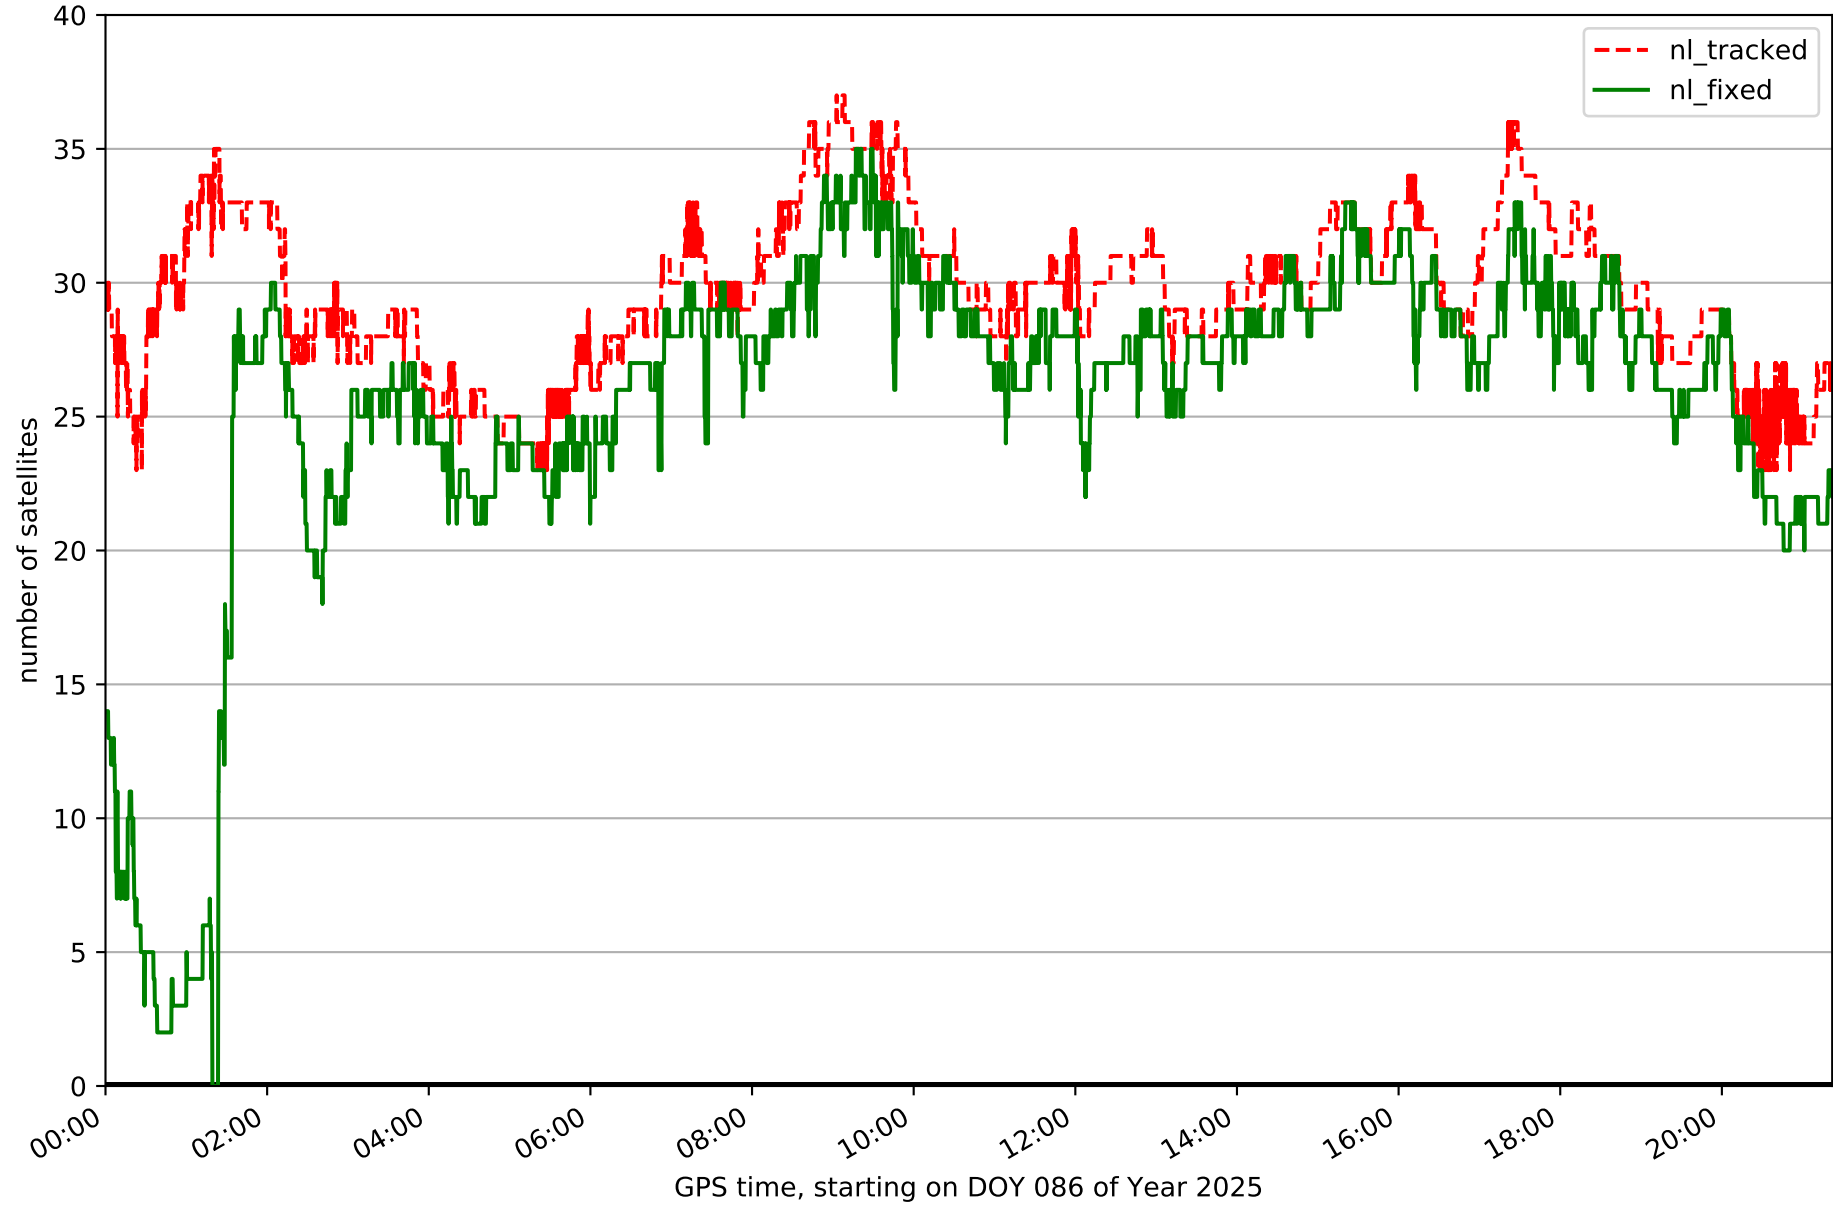


Fixing percentage of satellites in network N32T with threshold set to 0.3

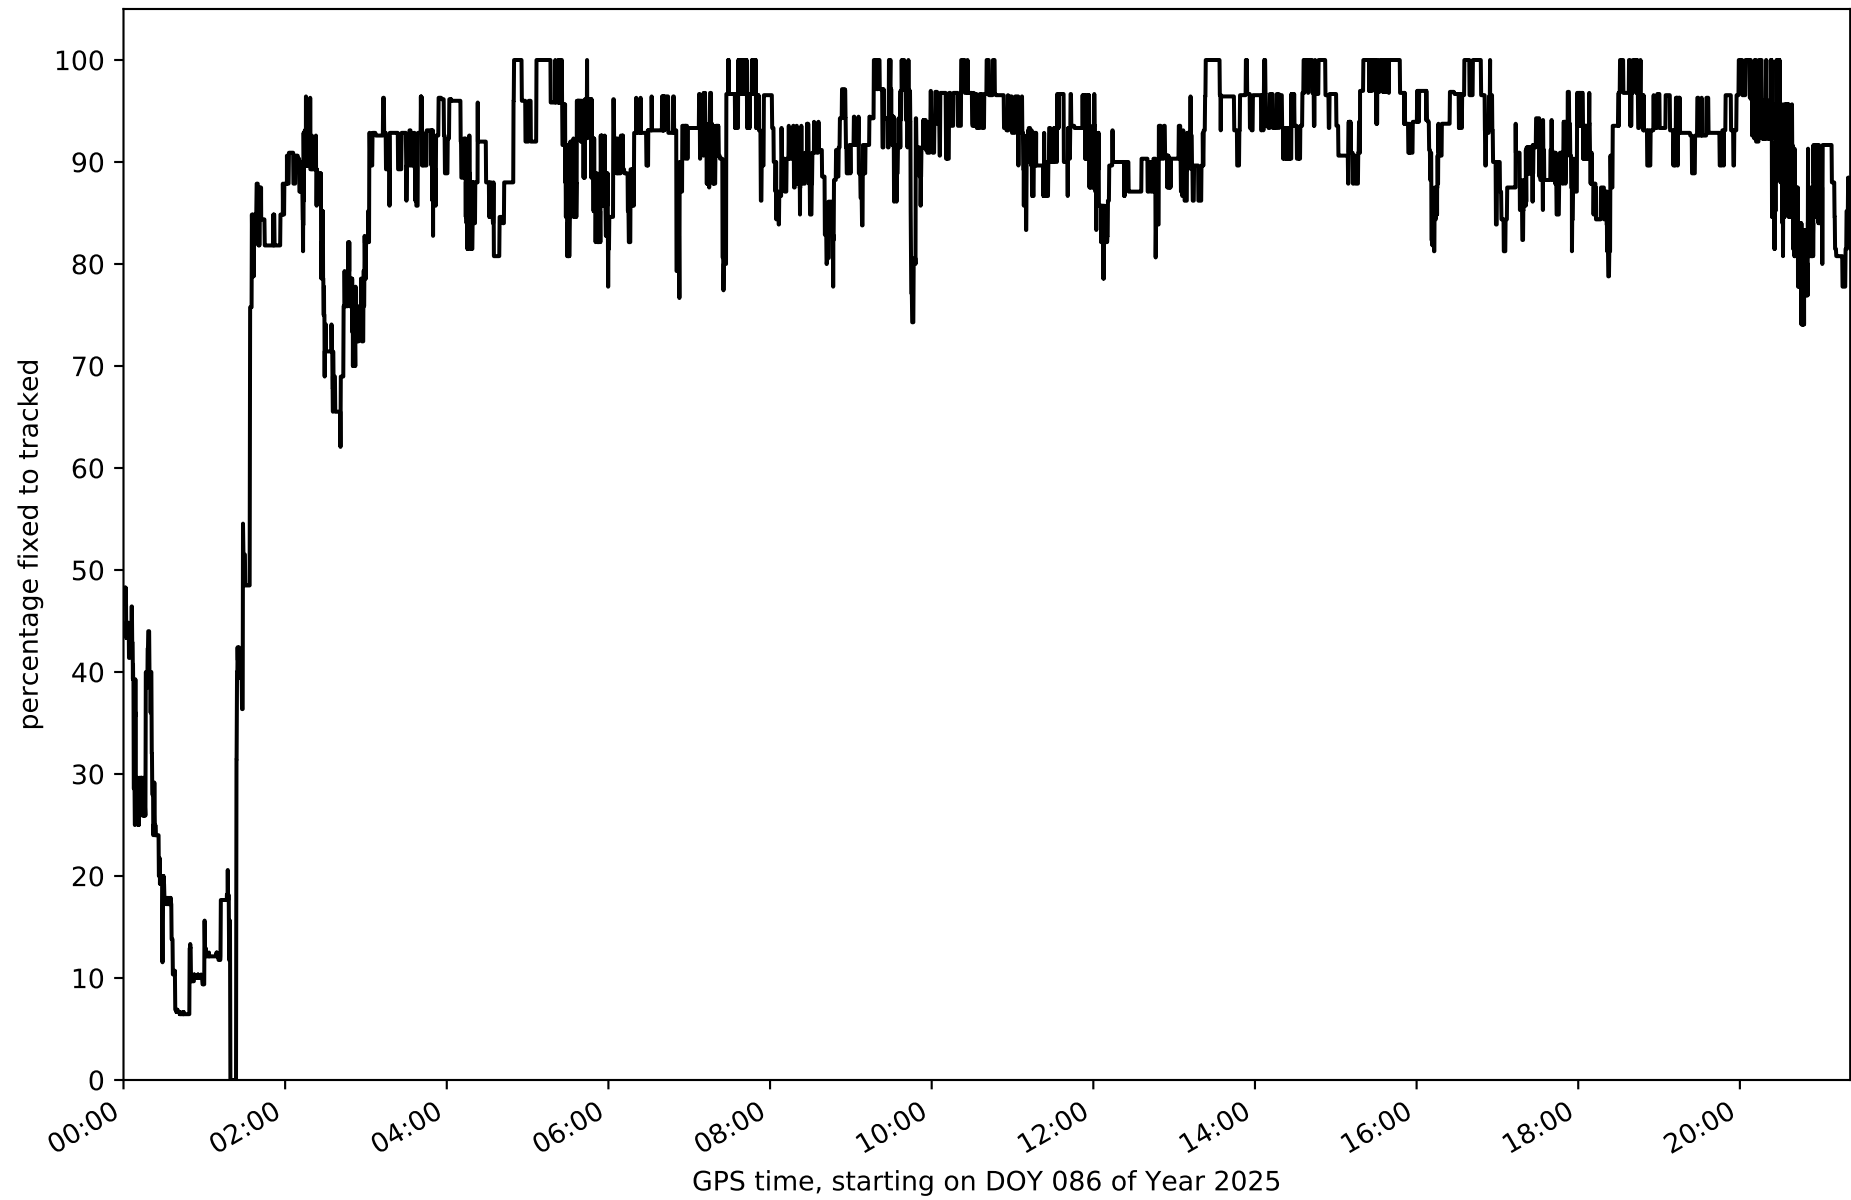


Network N32T - only GPS with threshold set to 0.3

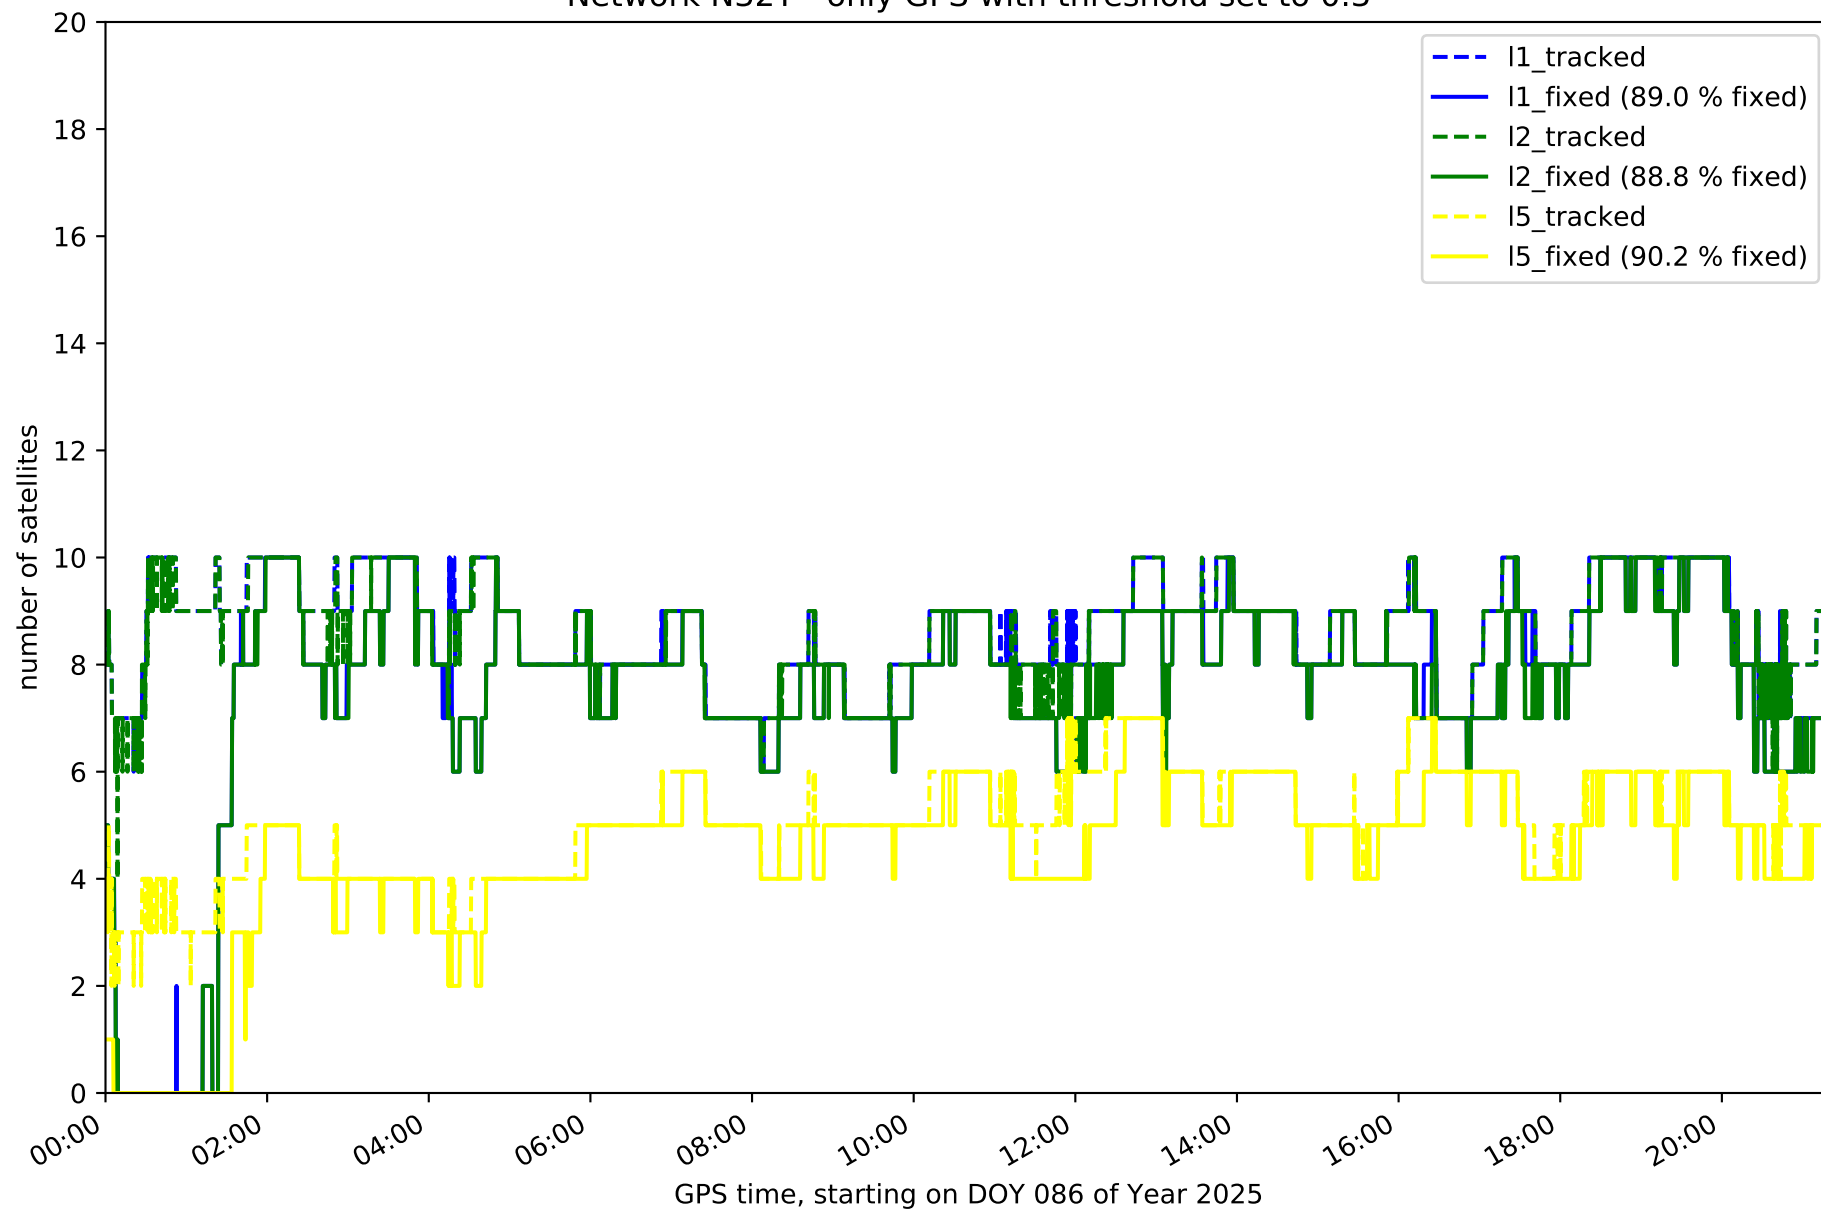


Network N32T - only GLONASS with threshold set to 0.3

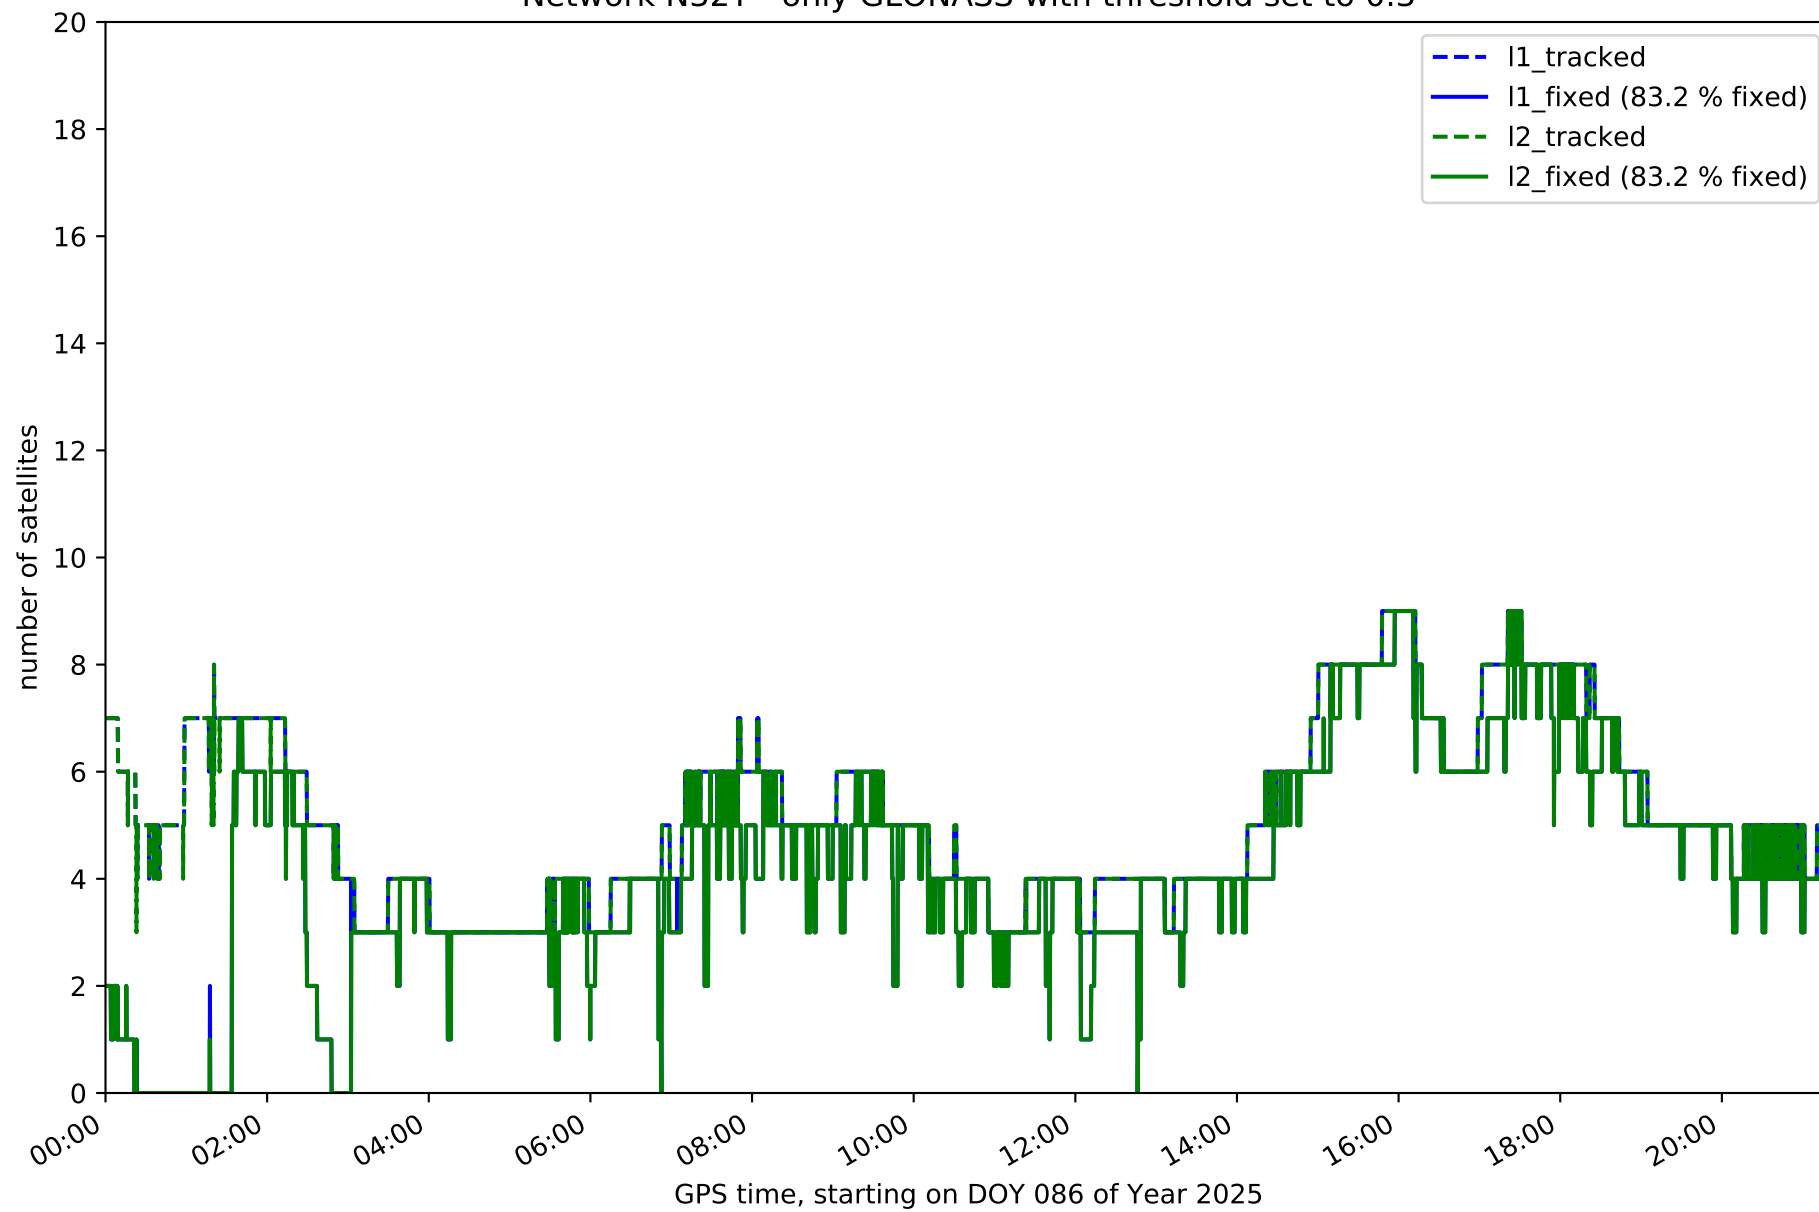


Network N32T - only BDS with threshold set to 0.3

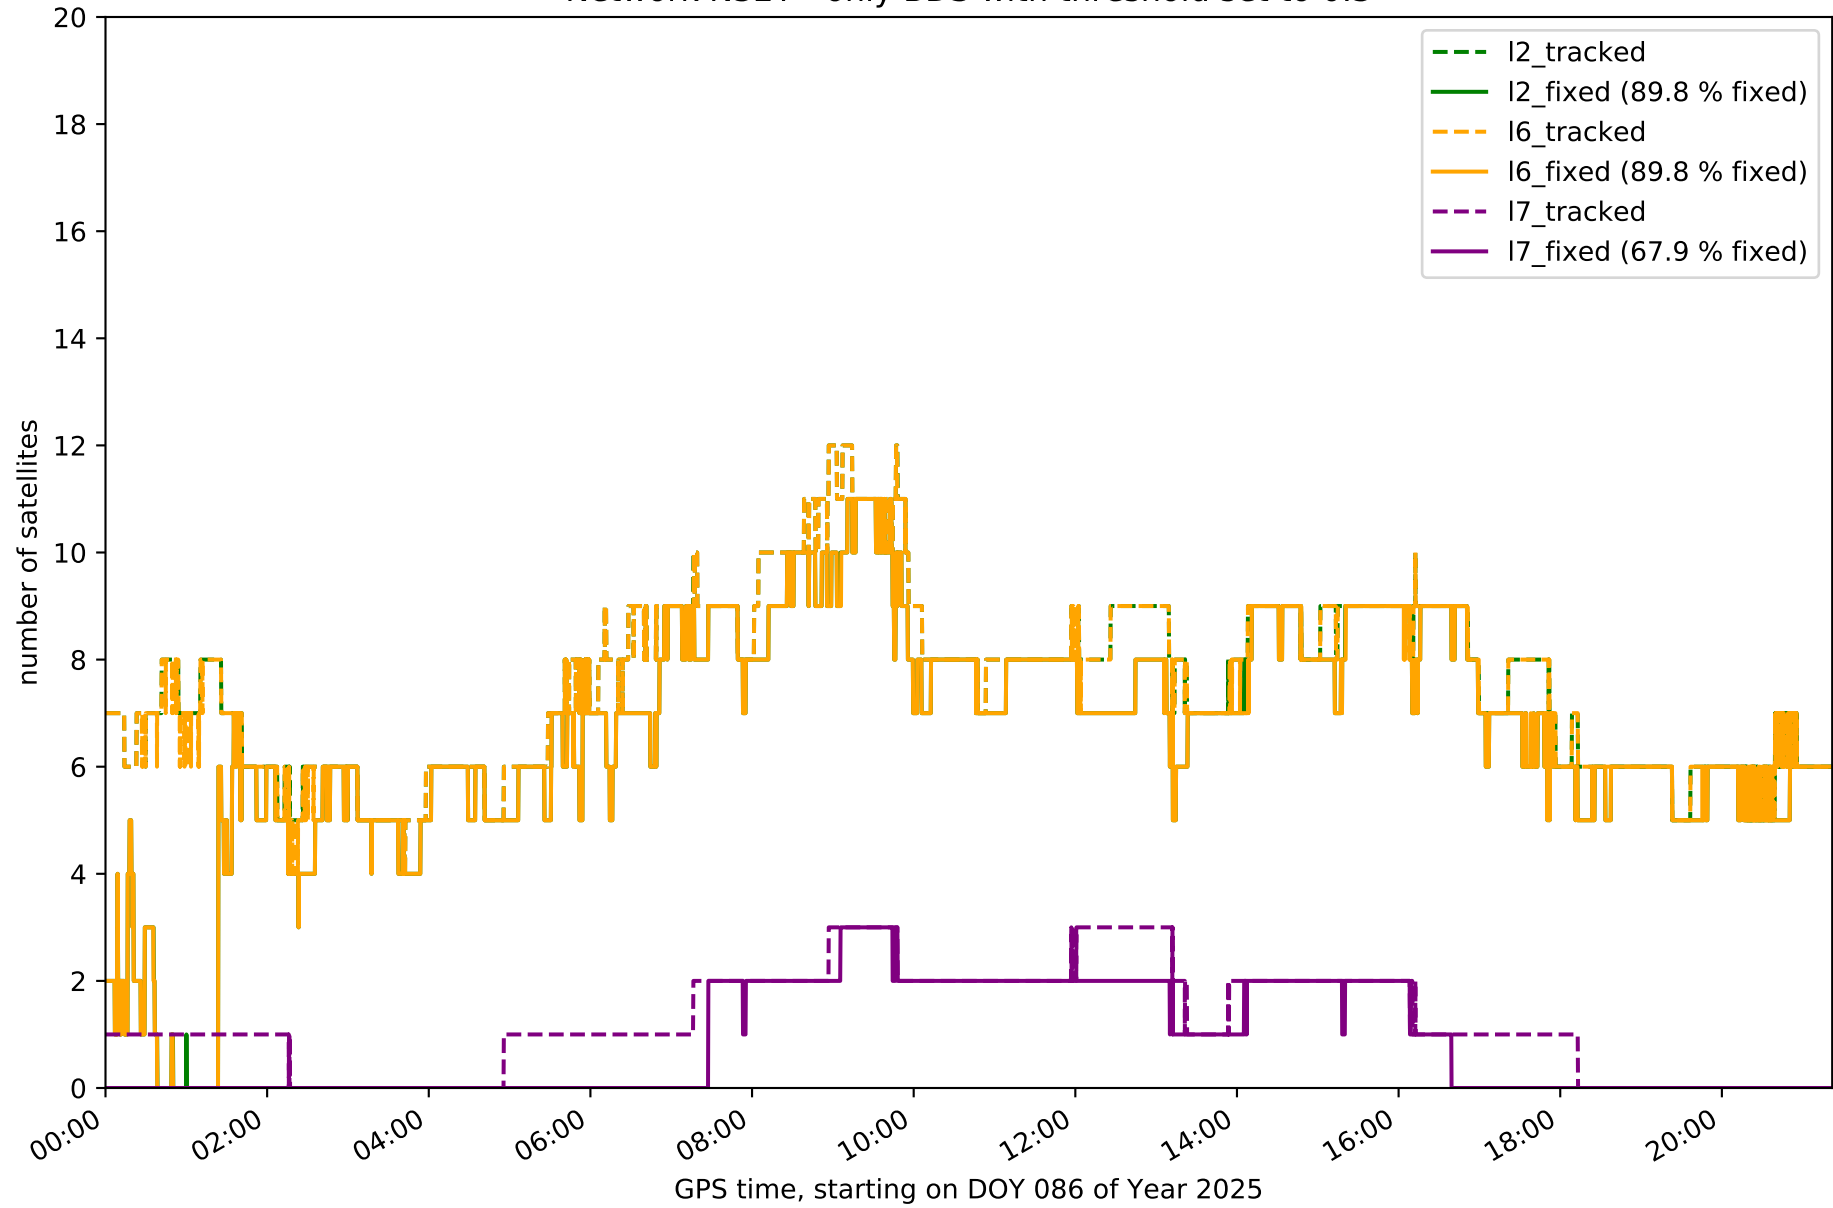


Network N32T - only Galileo with threshold set to 0.3

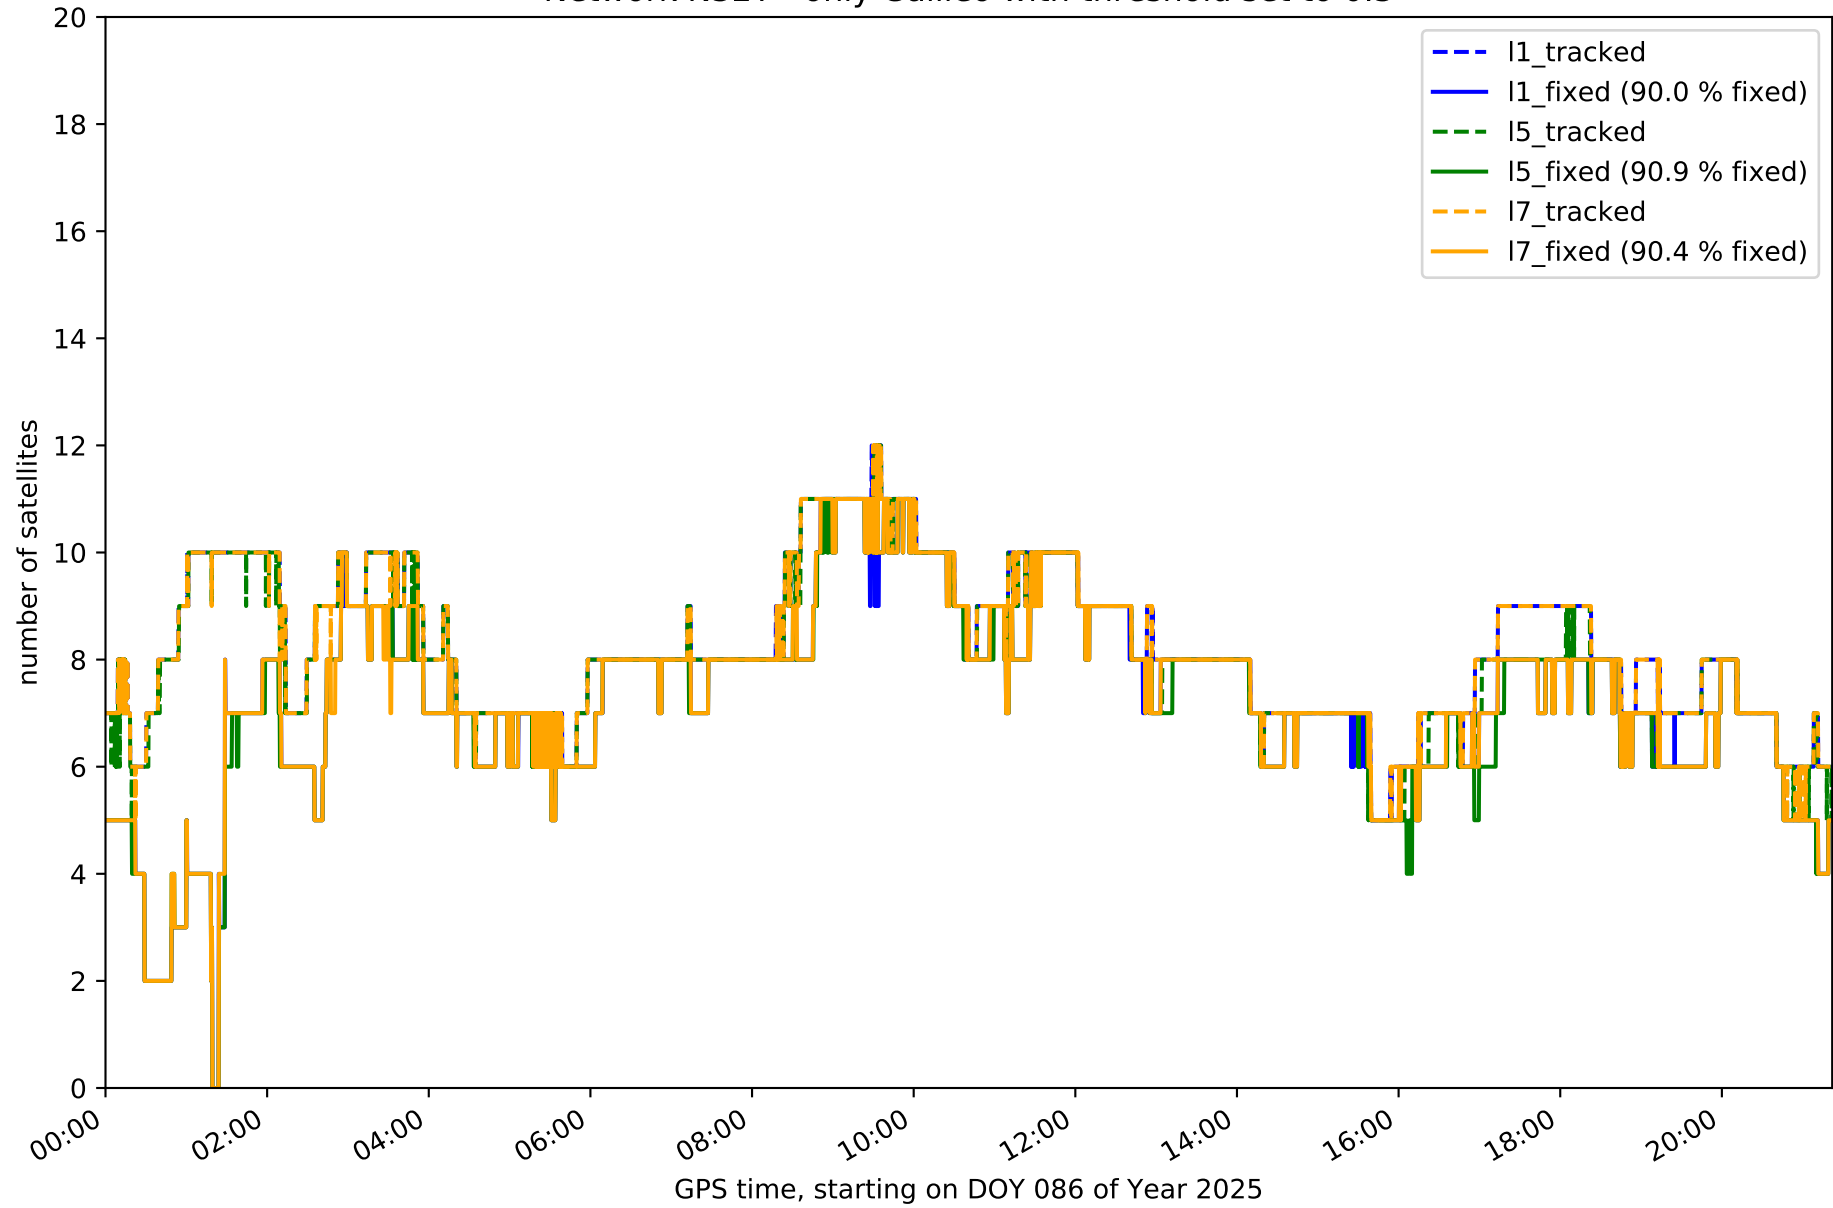


Station EH01 in network N32T

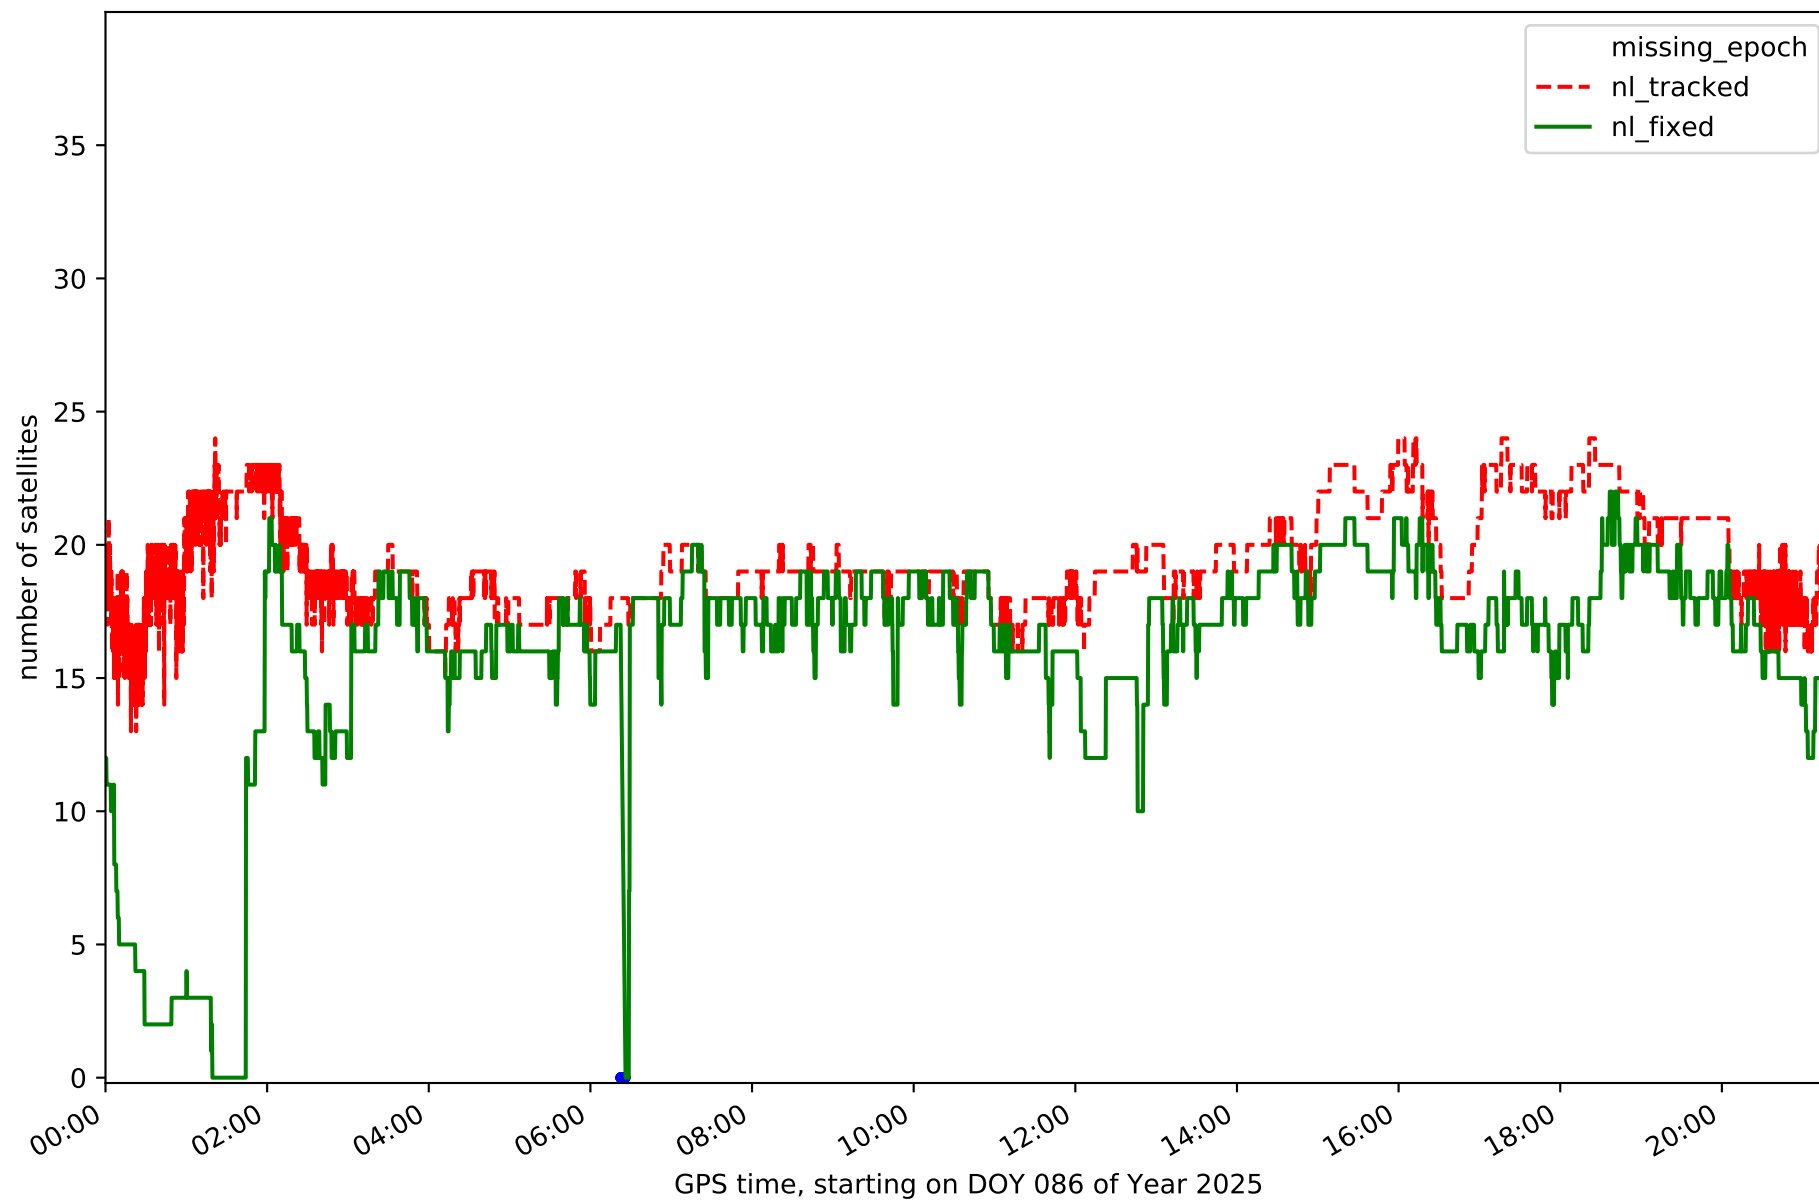


Station EH02 in network N32T

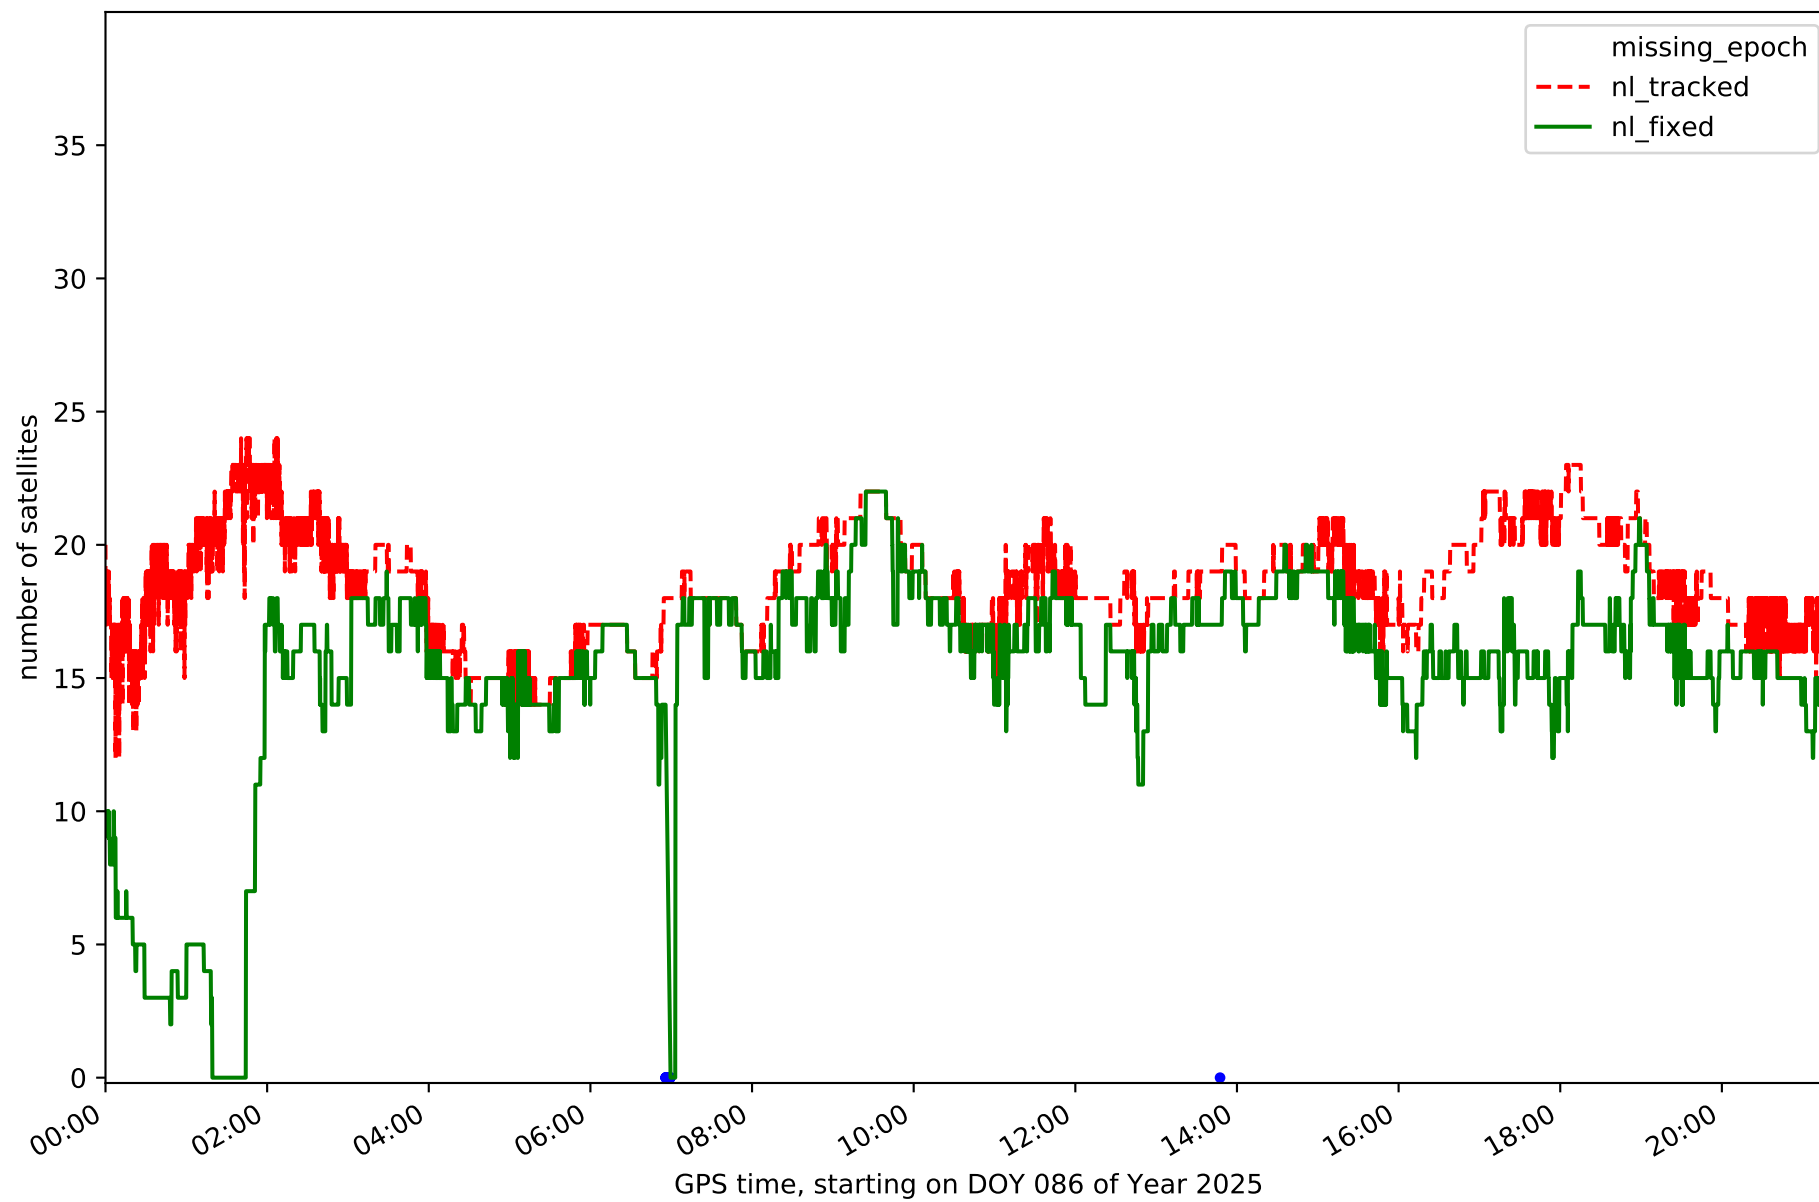


Station GOM1 in network N32T

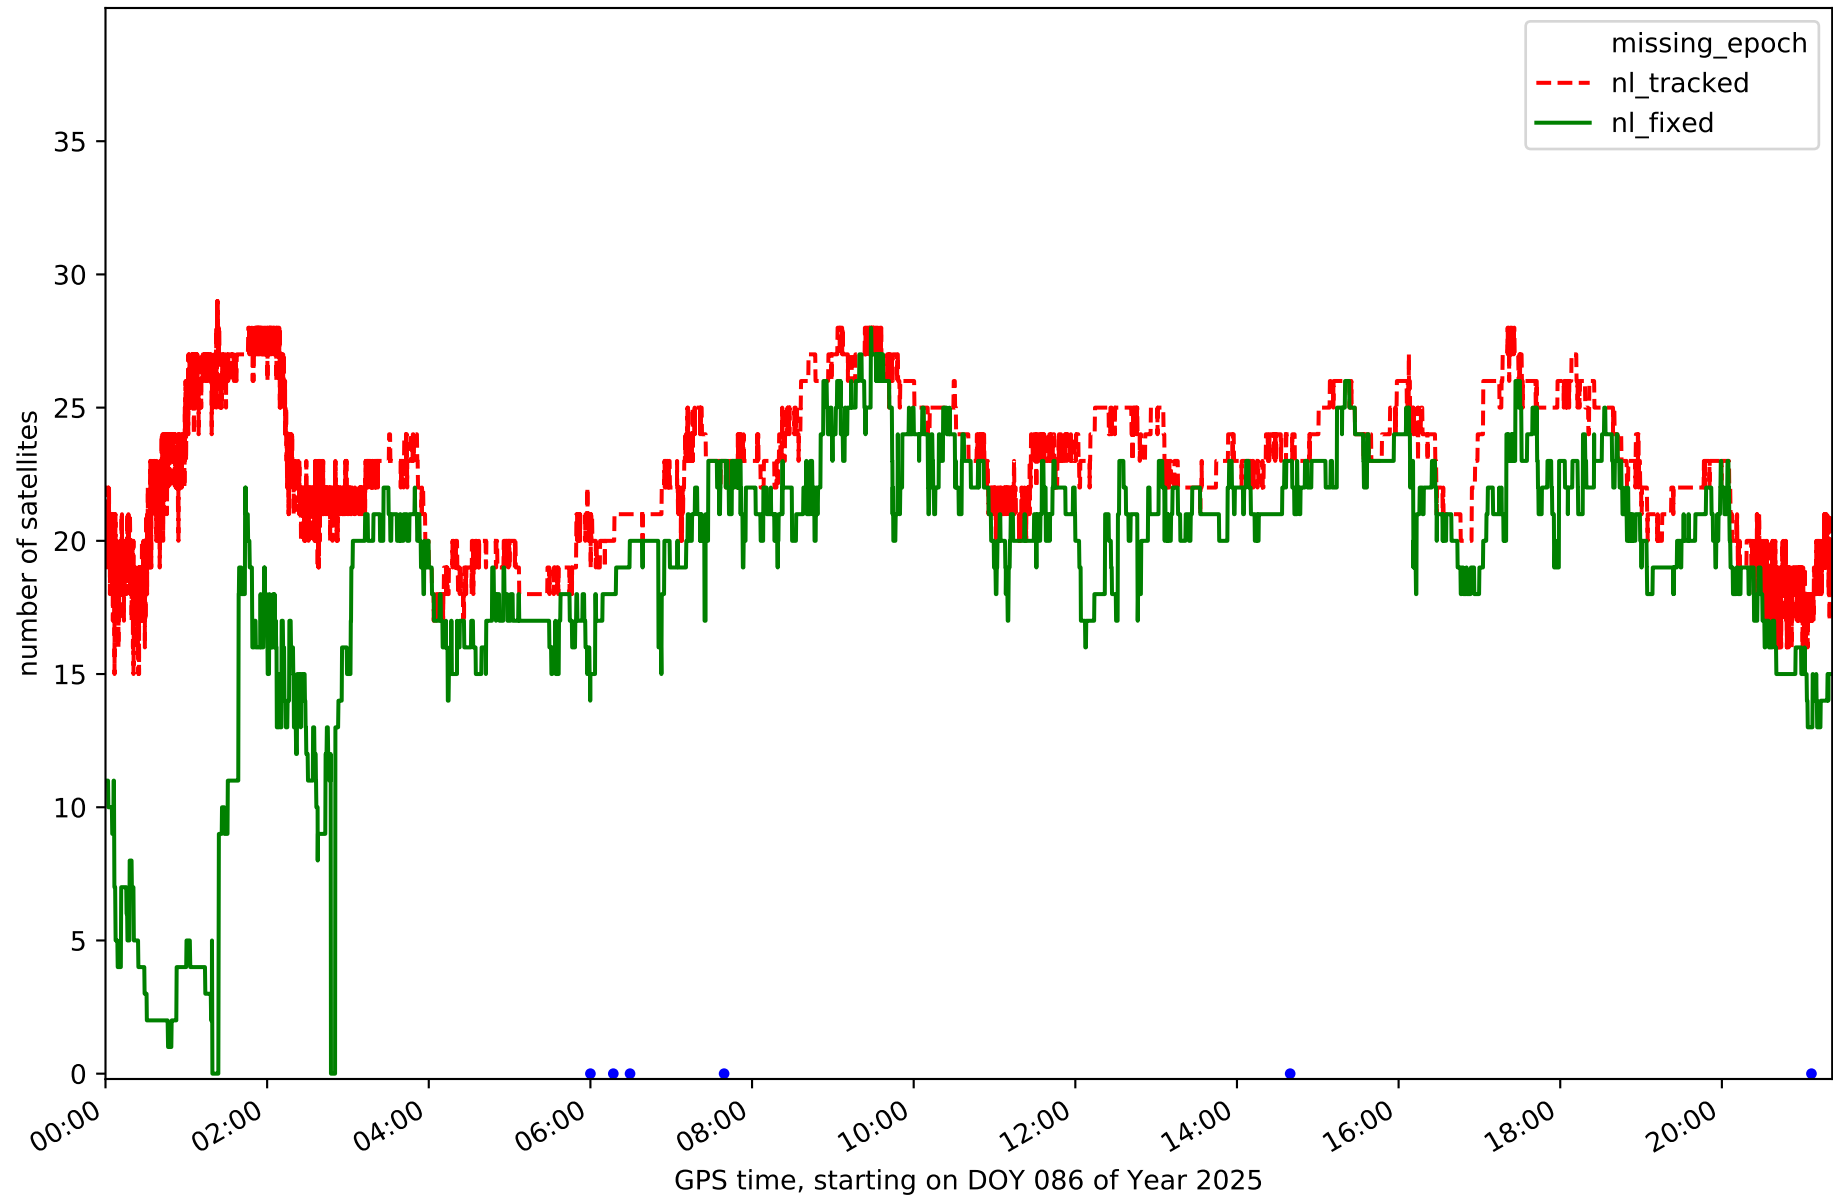


Station IZAN in network N32T

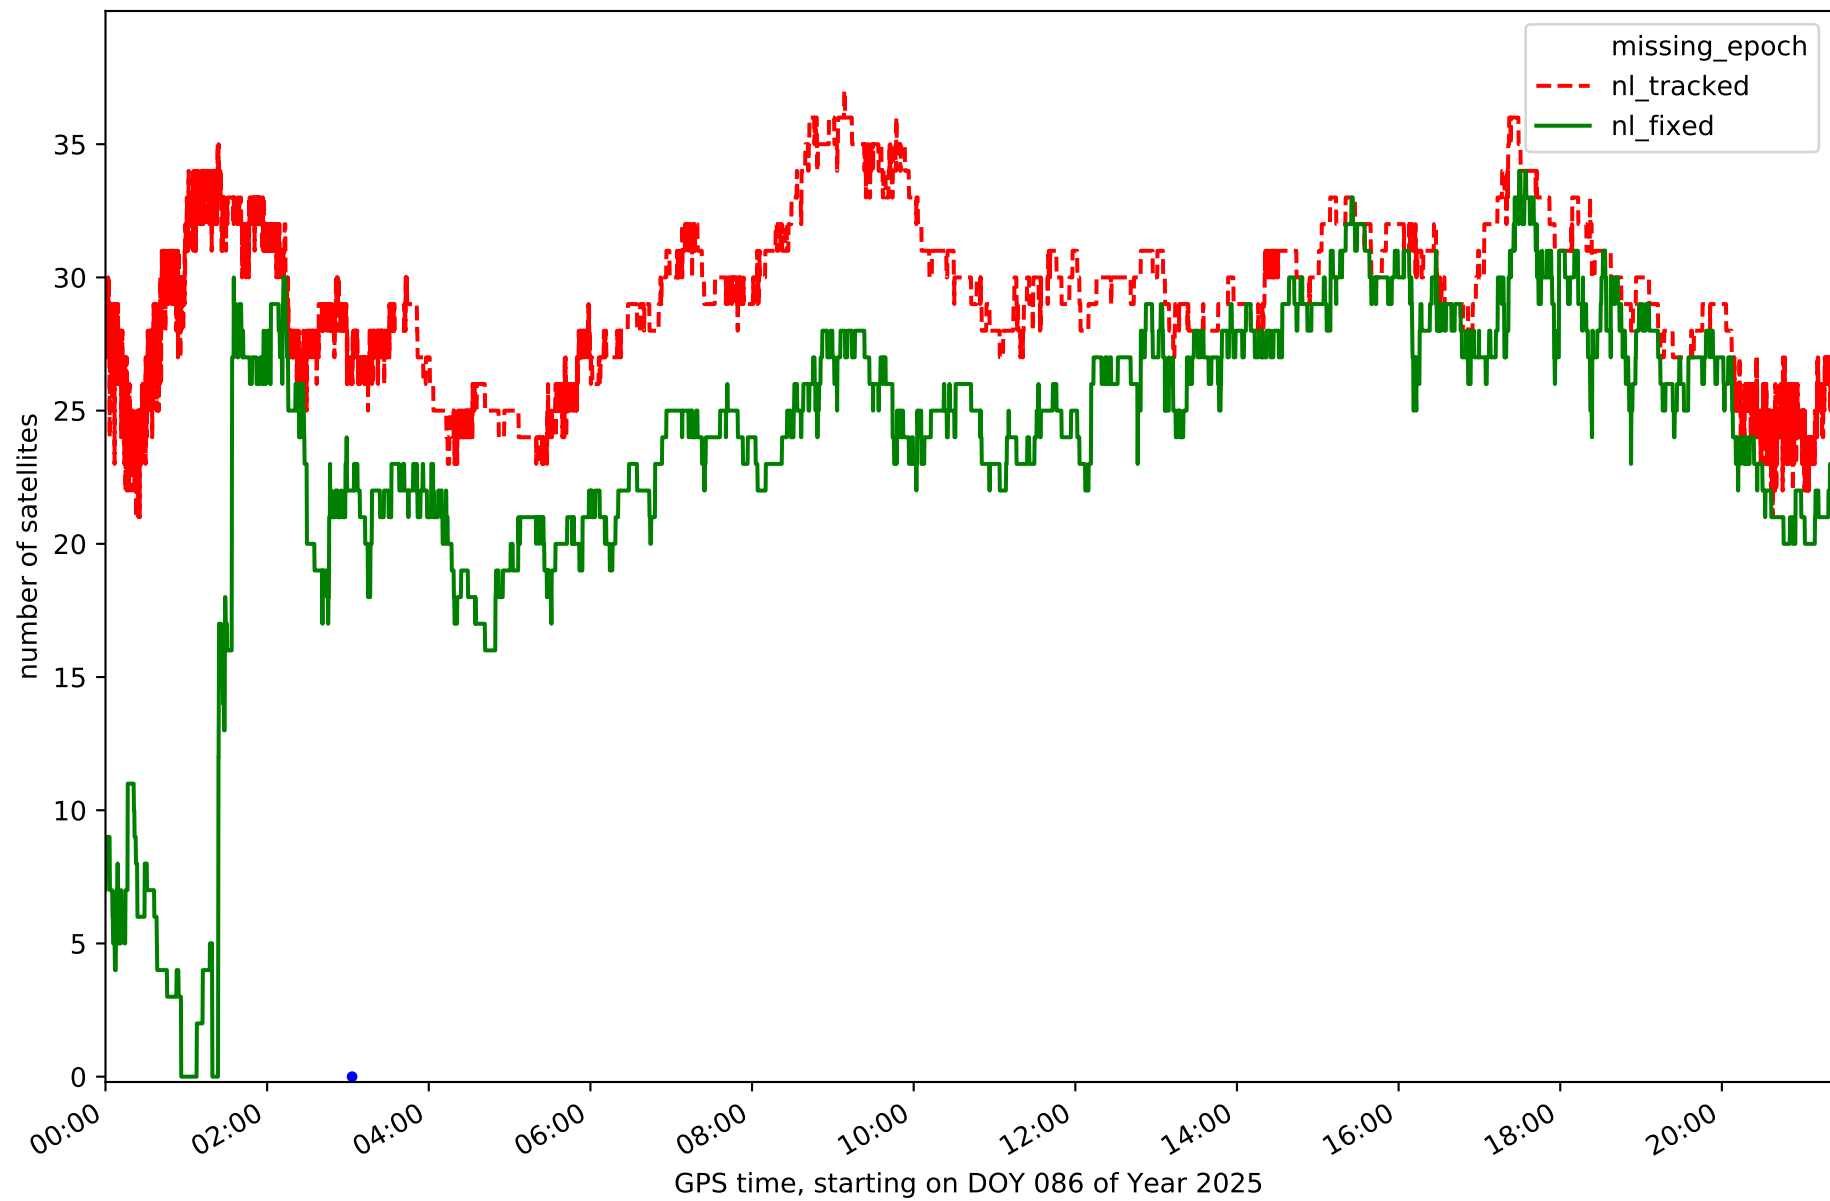


Station LP01 in network N32T

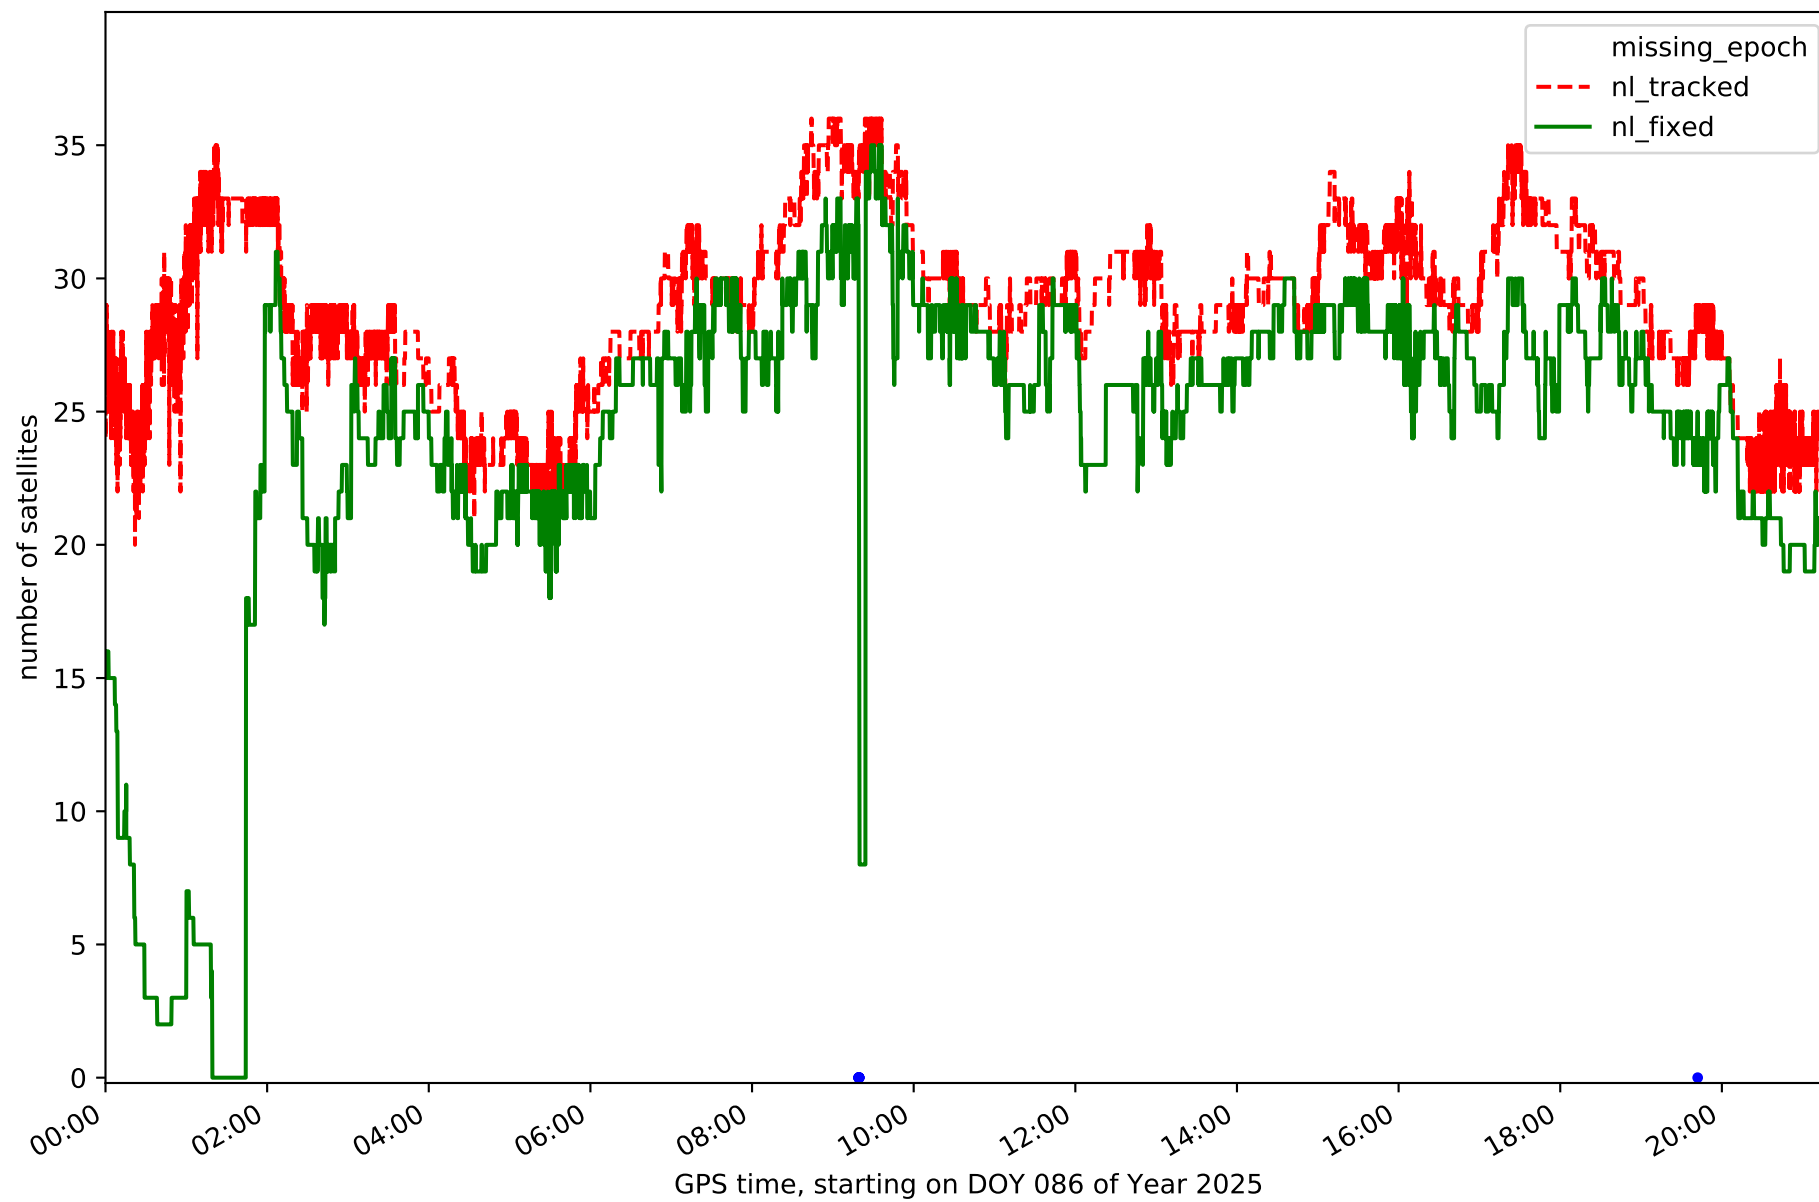


Station LP03 in network N32T

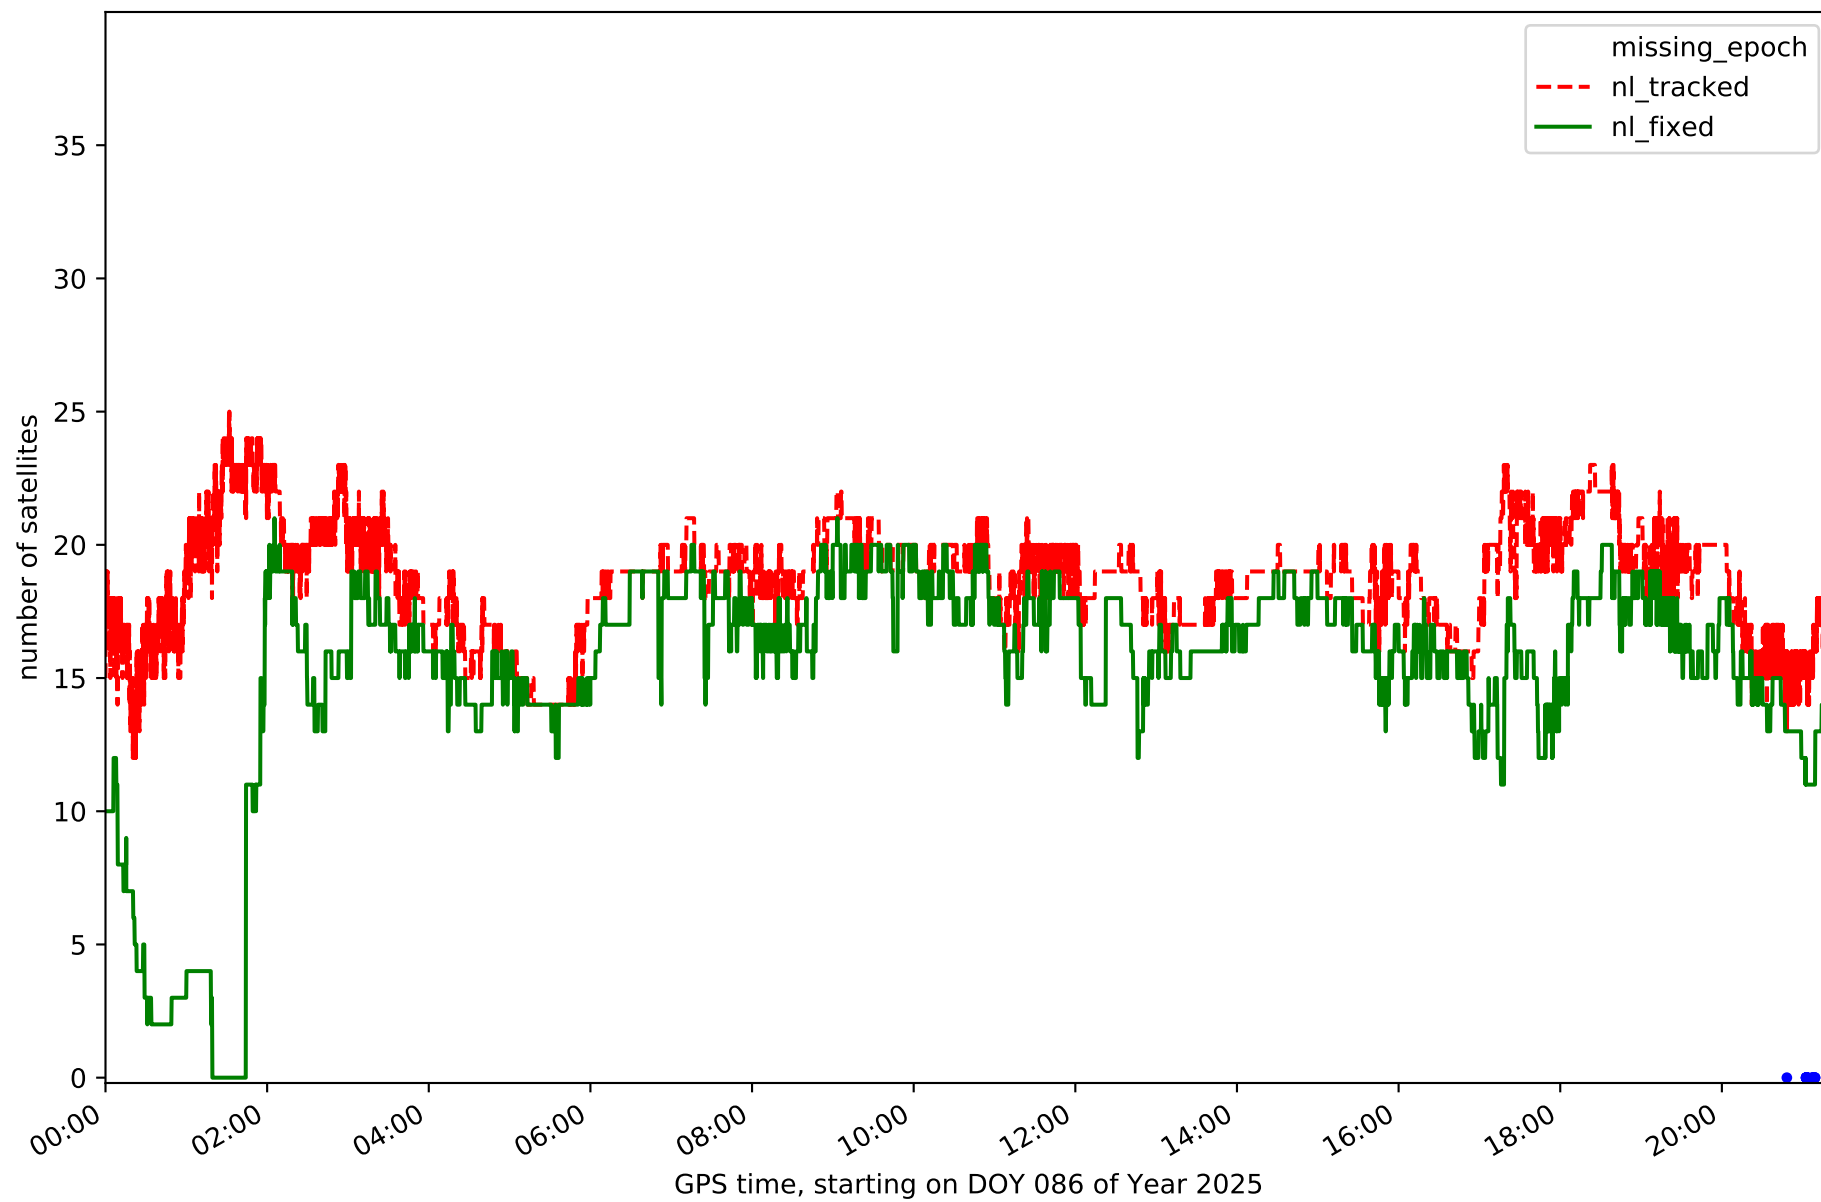


Station LPAL in network N32T

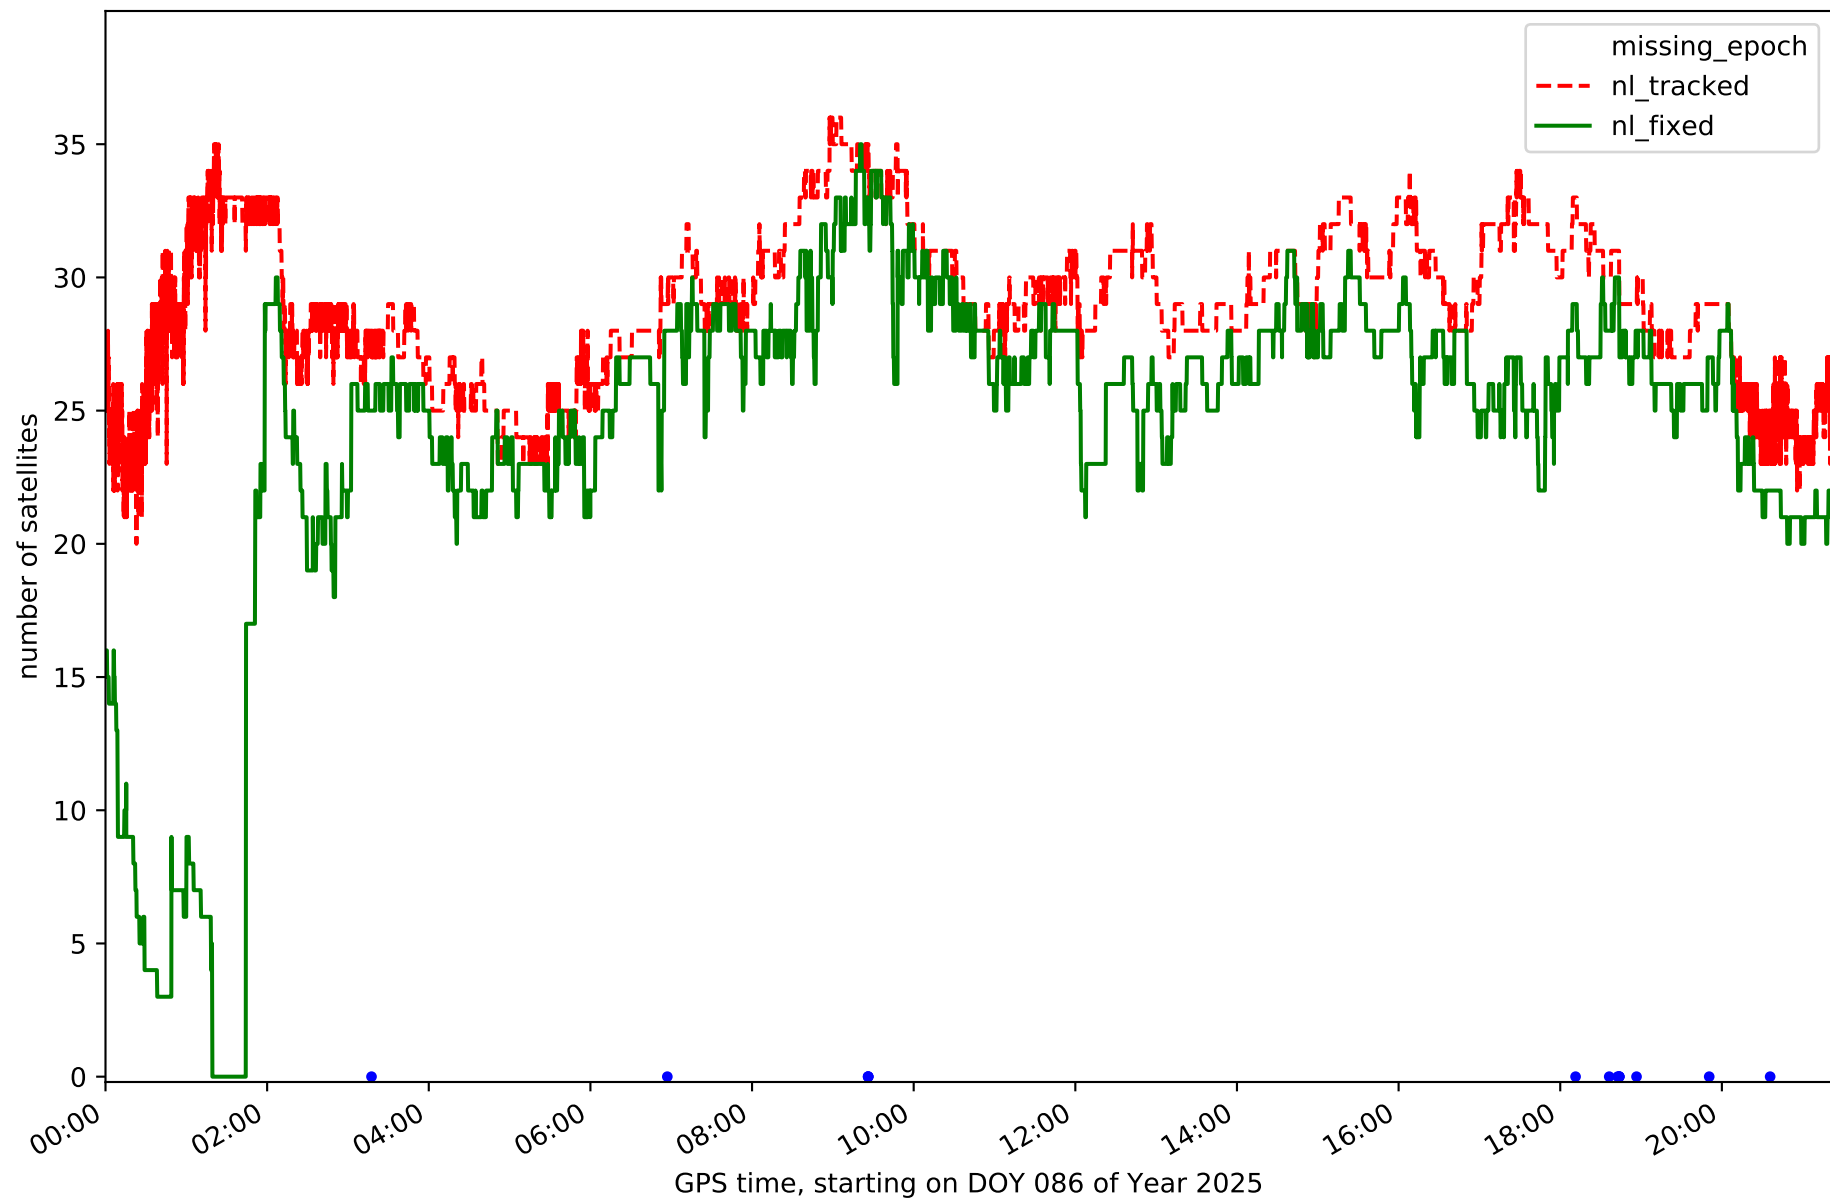


Station LRES in network N32T

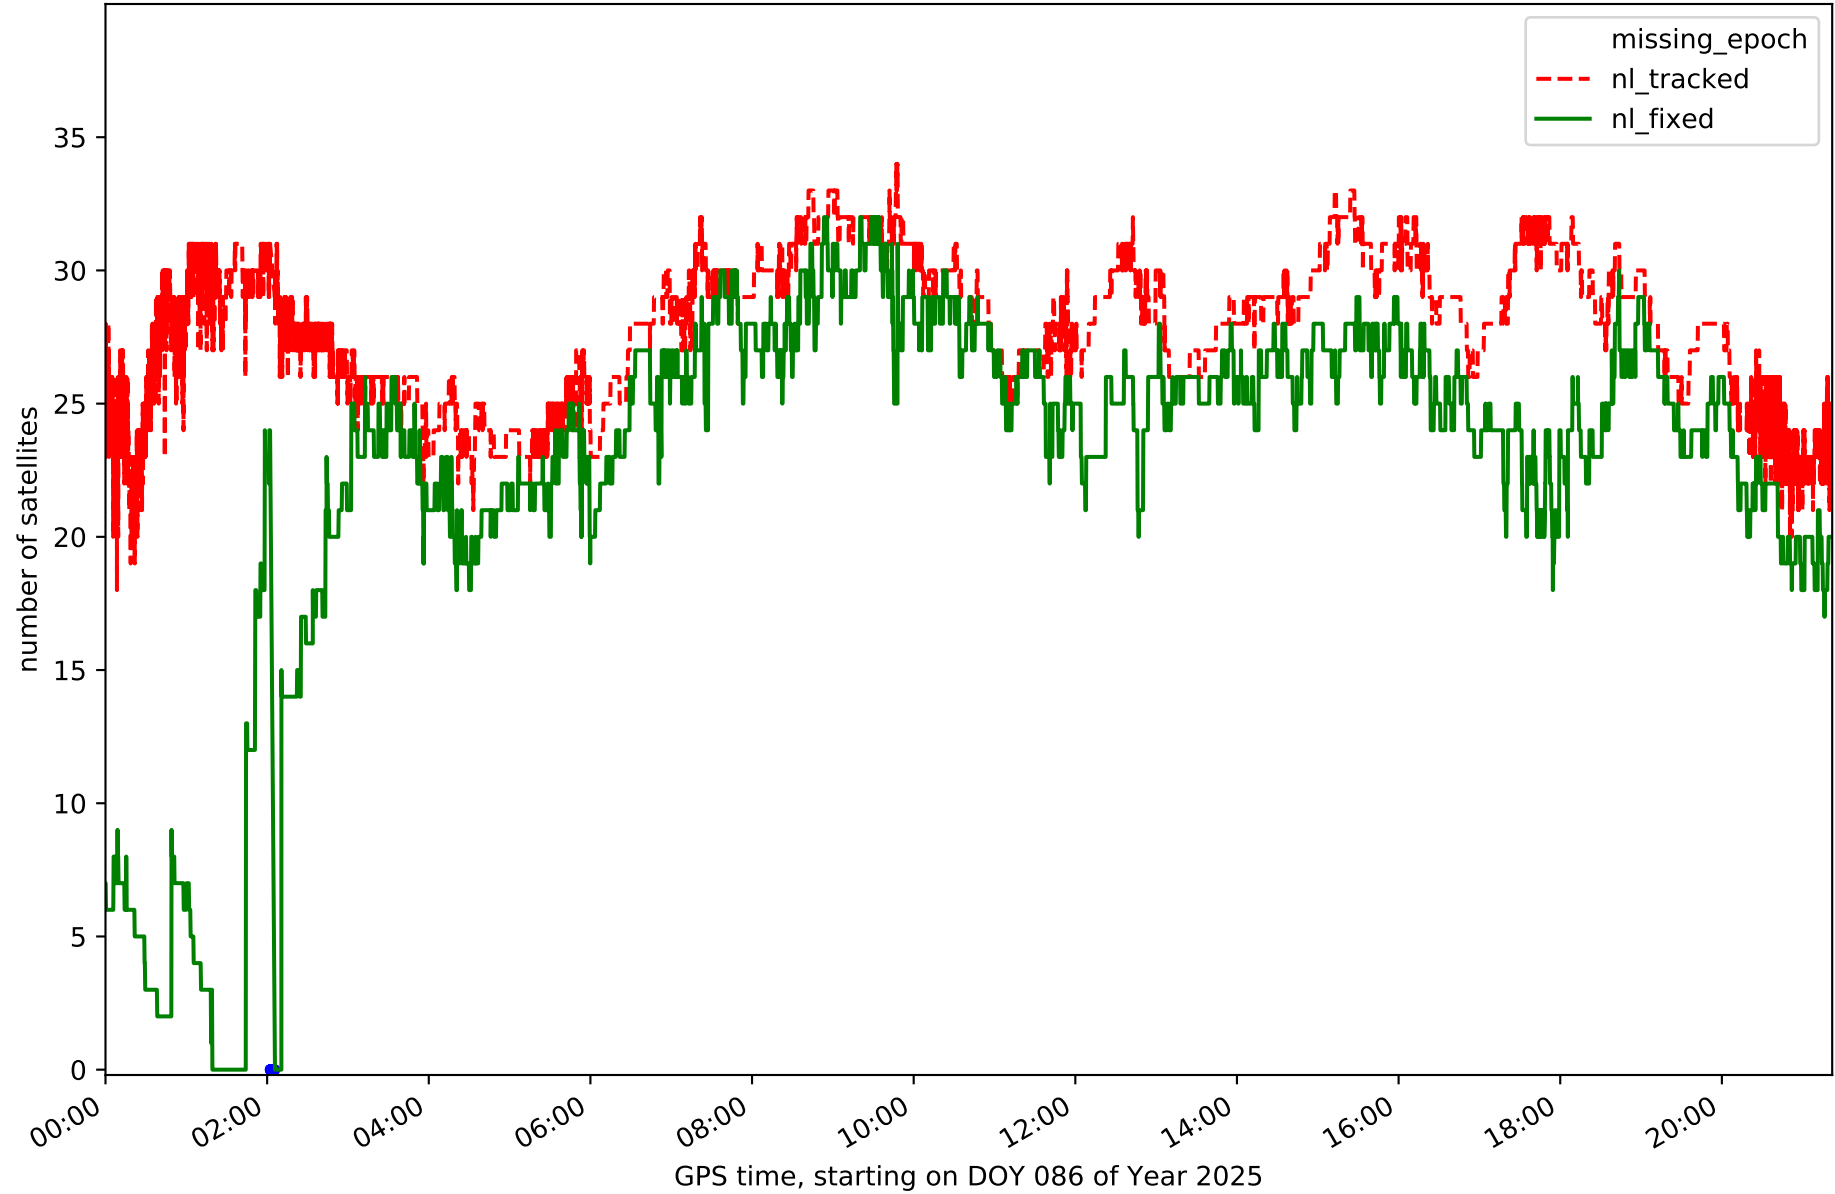


Station TN01 in network N32T

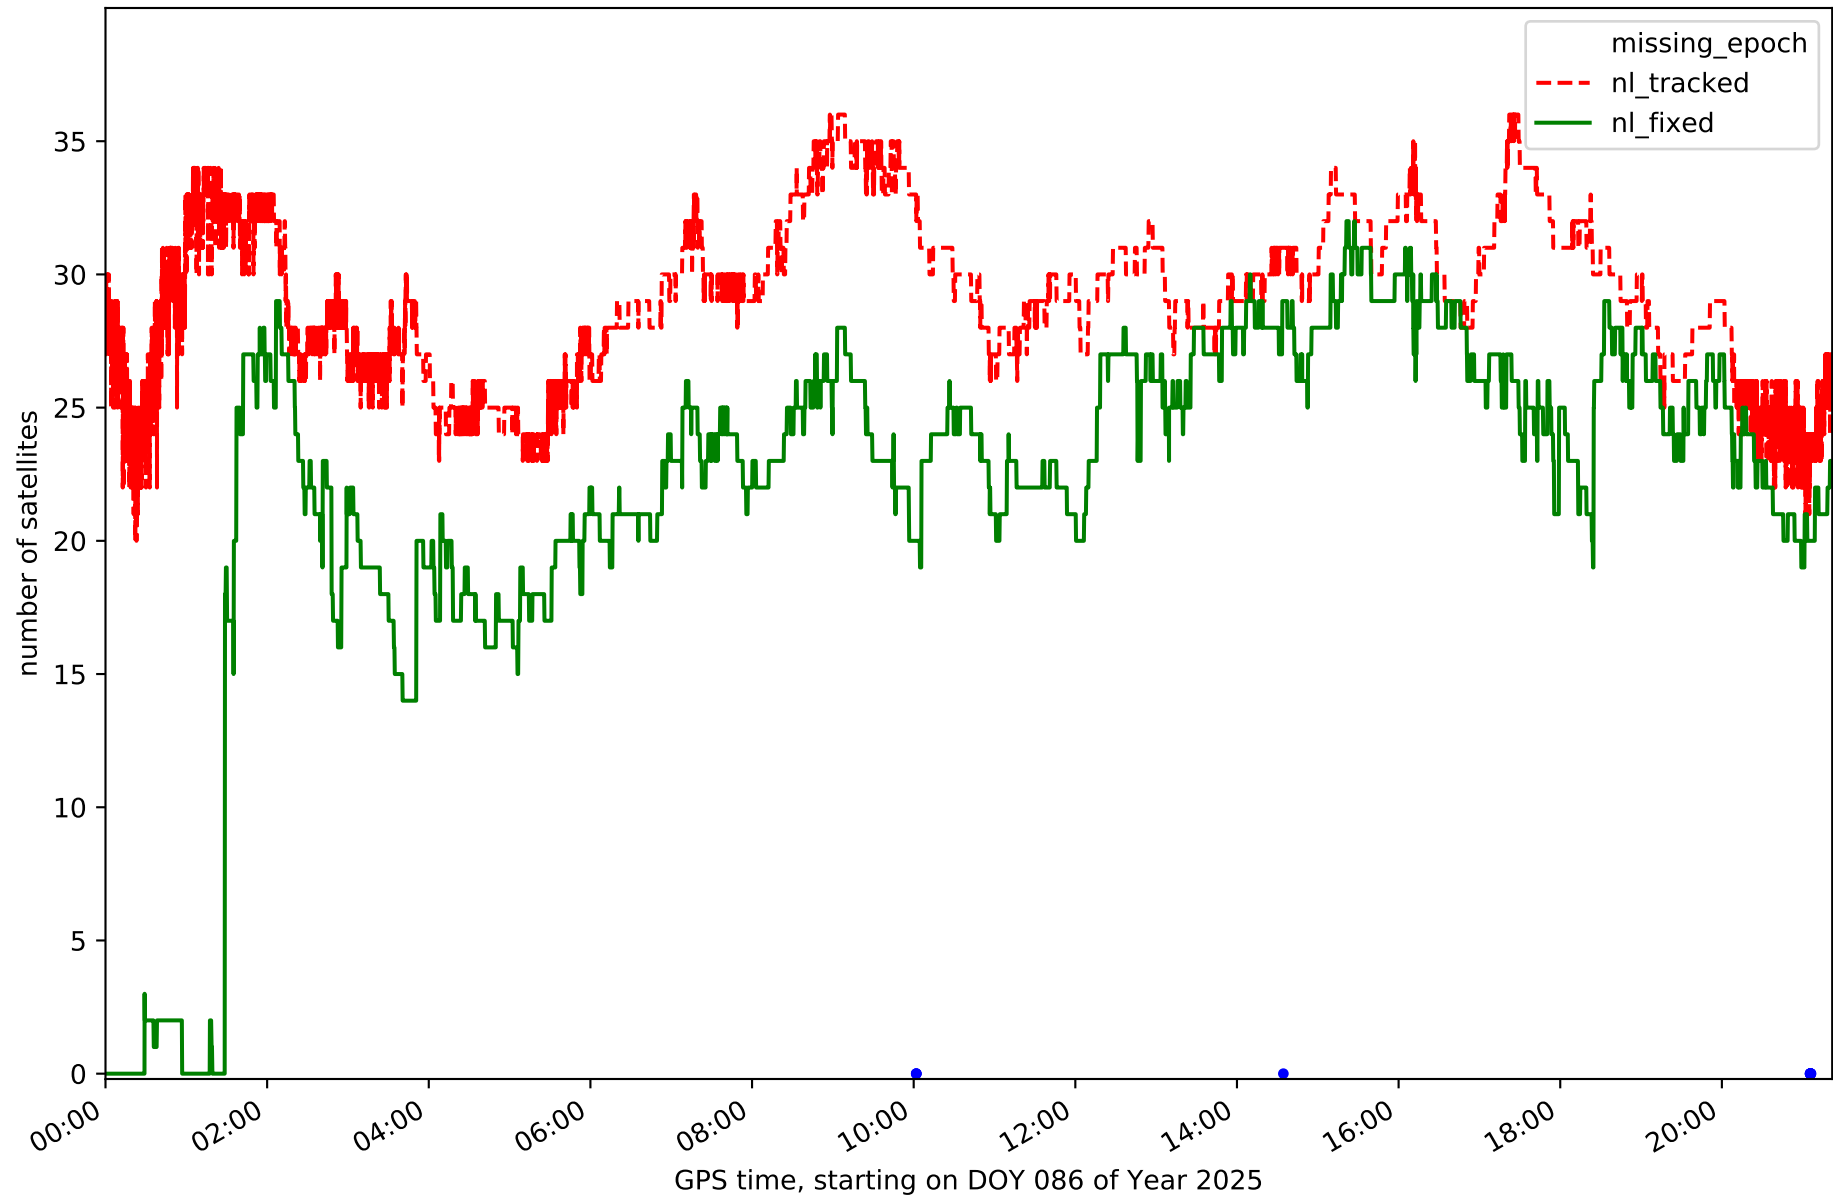


Station TN02 in network N32T

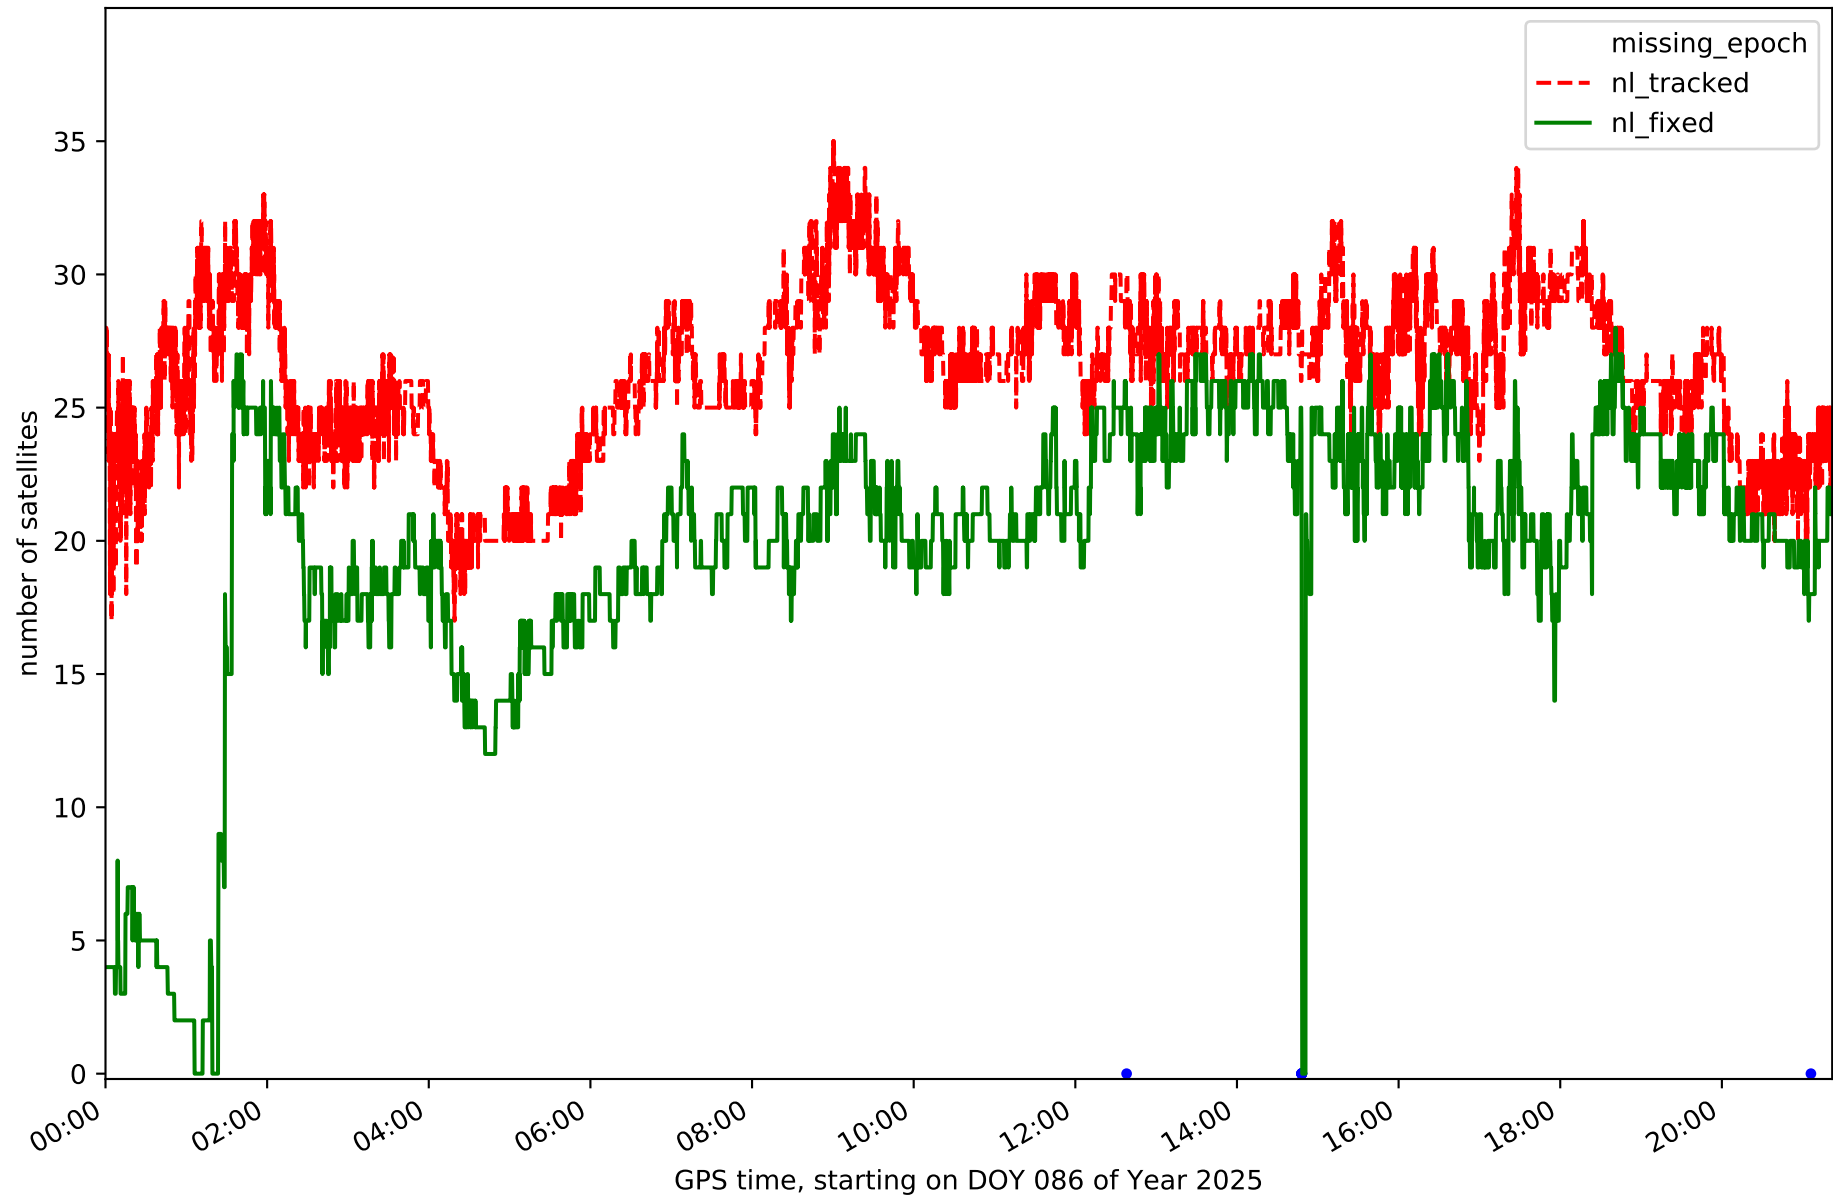


Station TN03 in network N32T

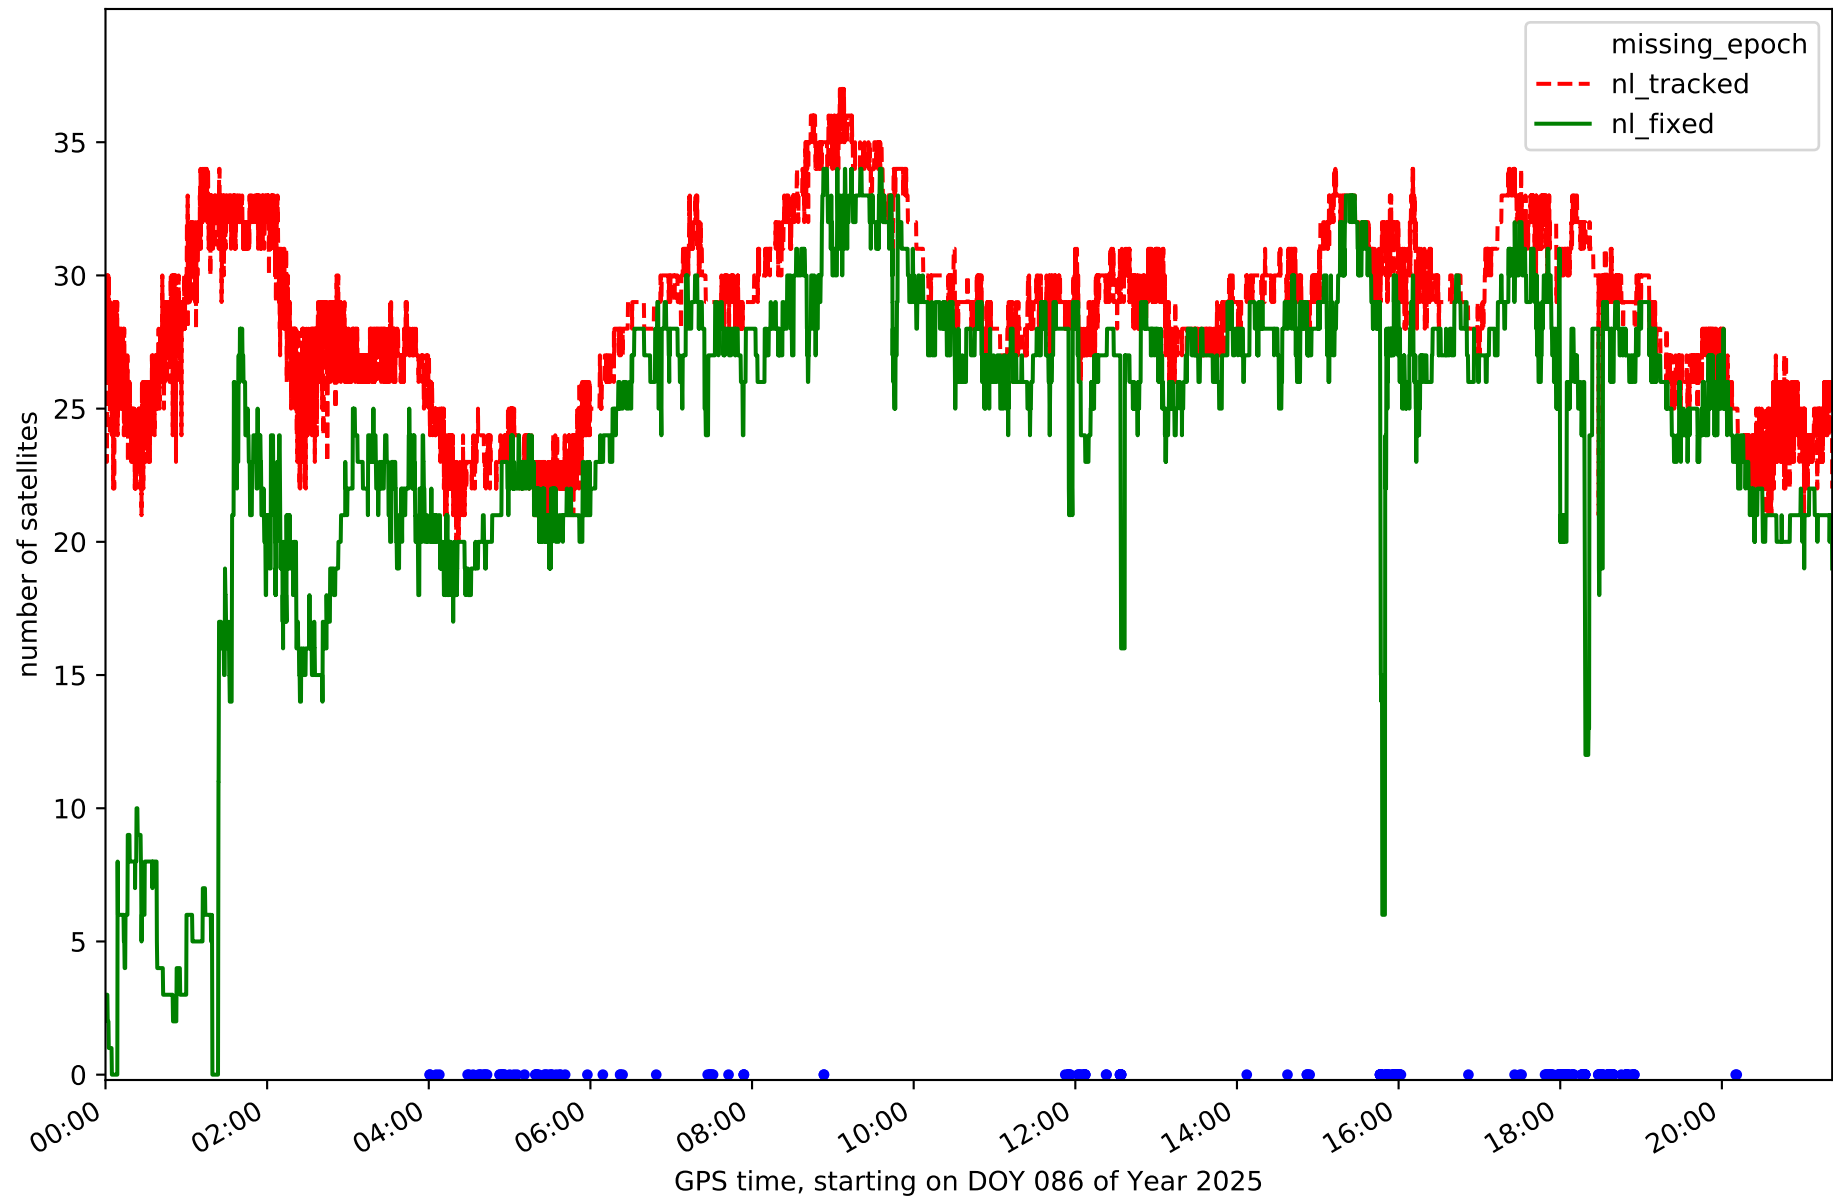


Station TN04 in network N32T

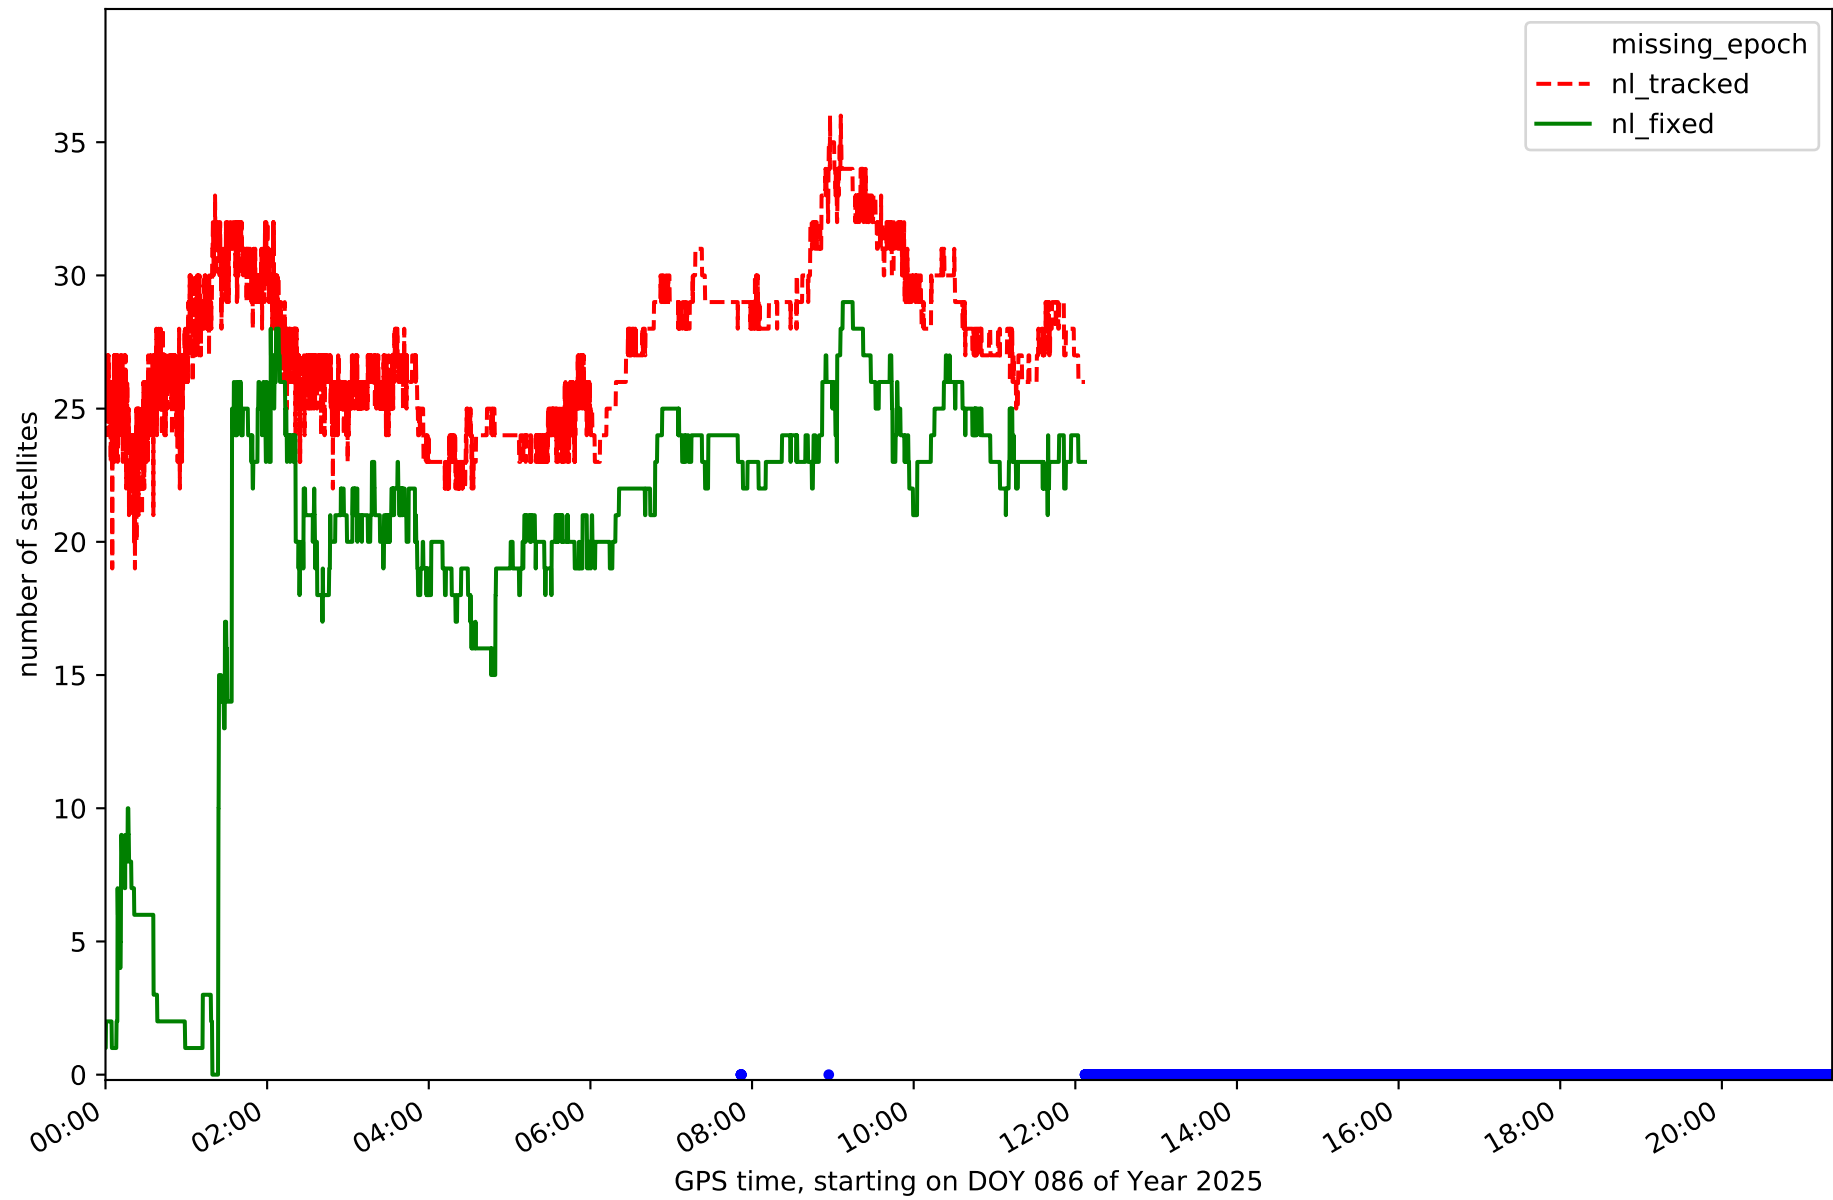


Station TN06 in network N32T

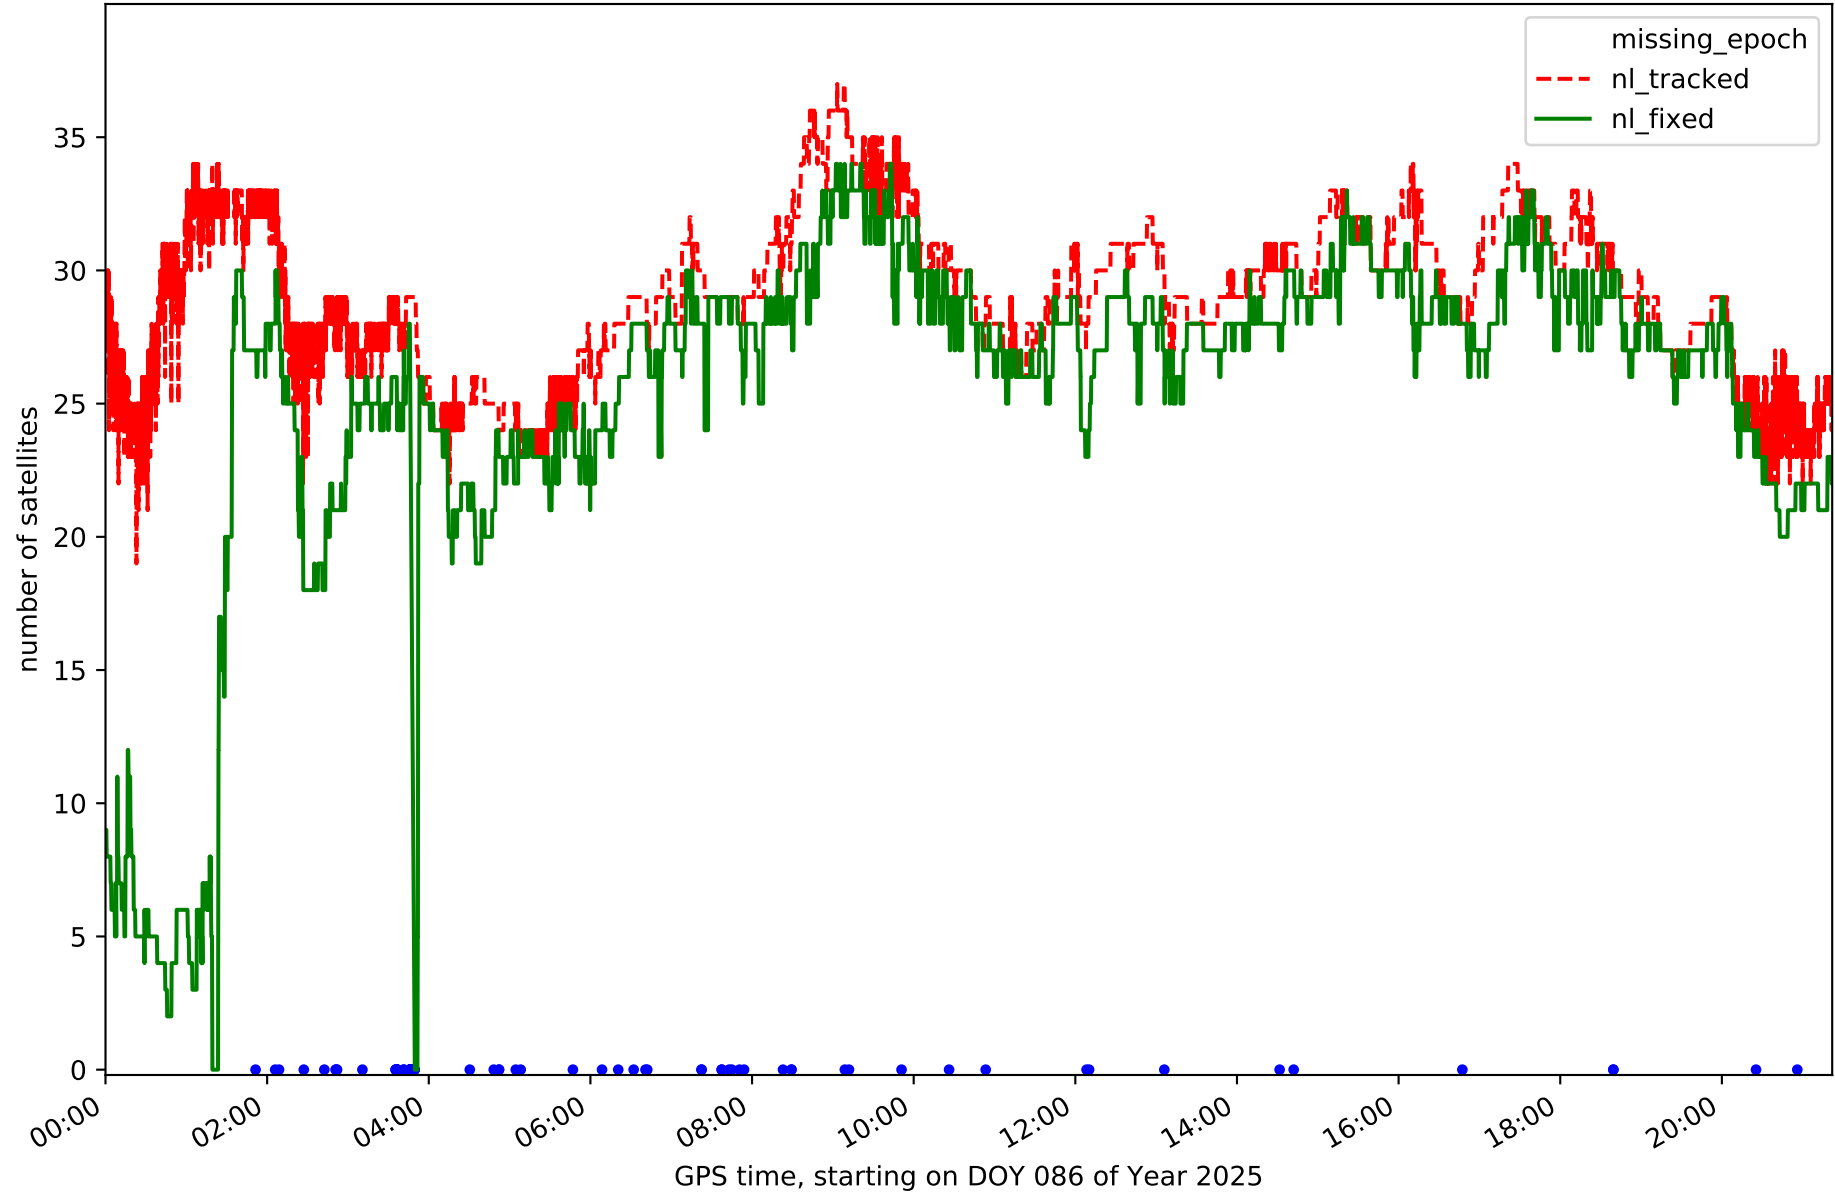


Station TN09 in network N32T

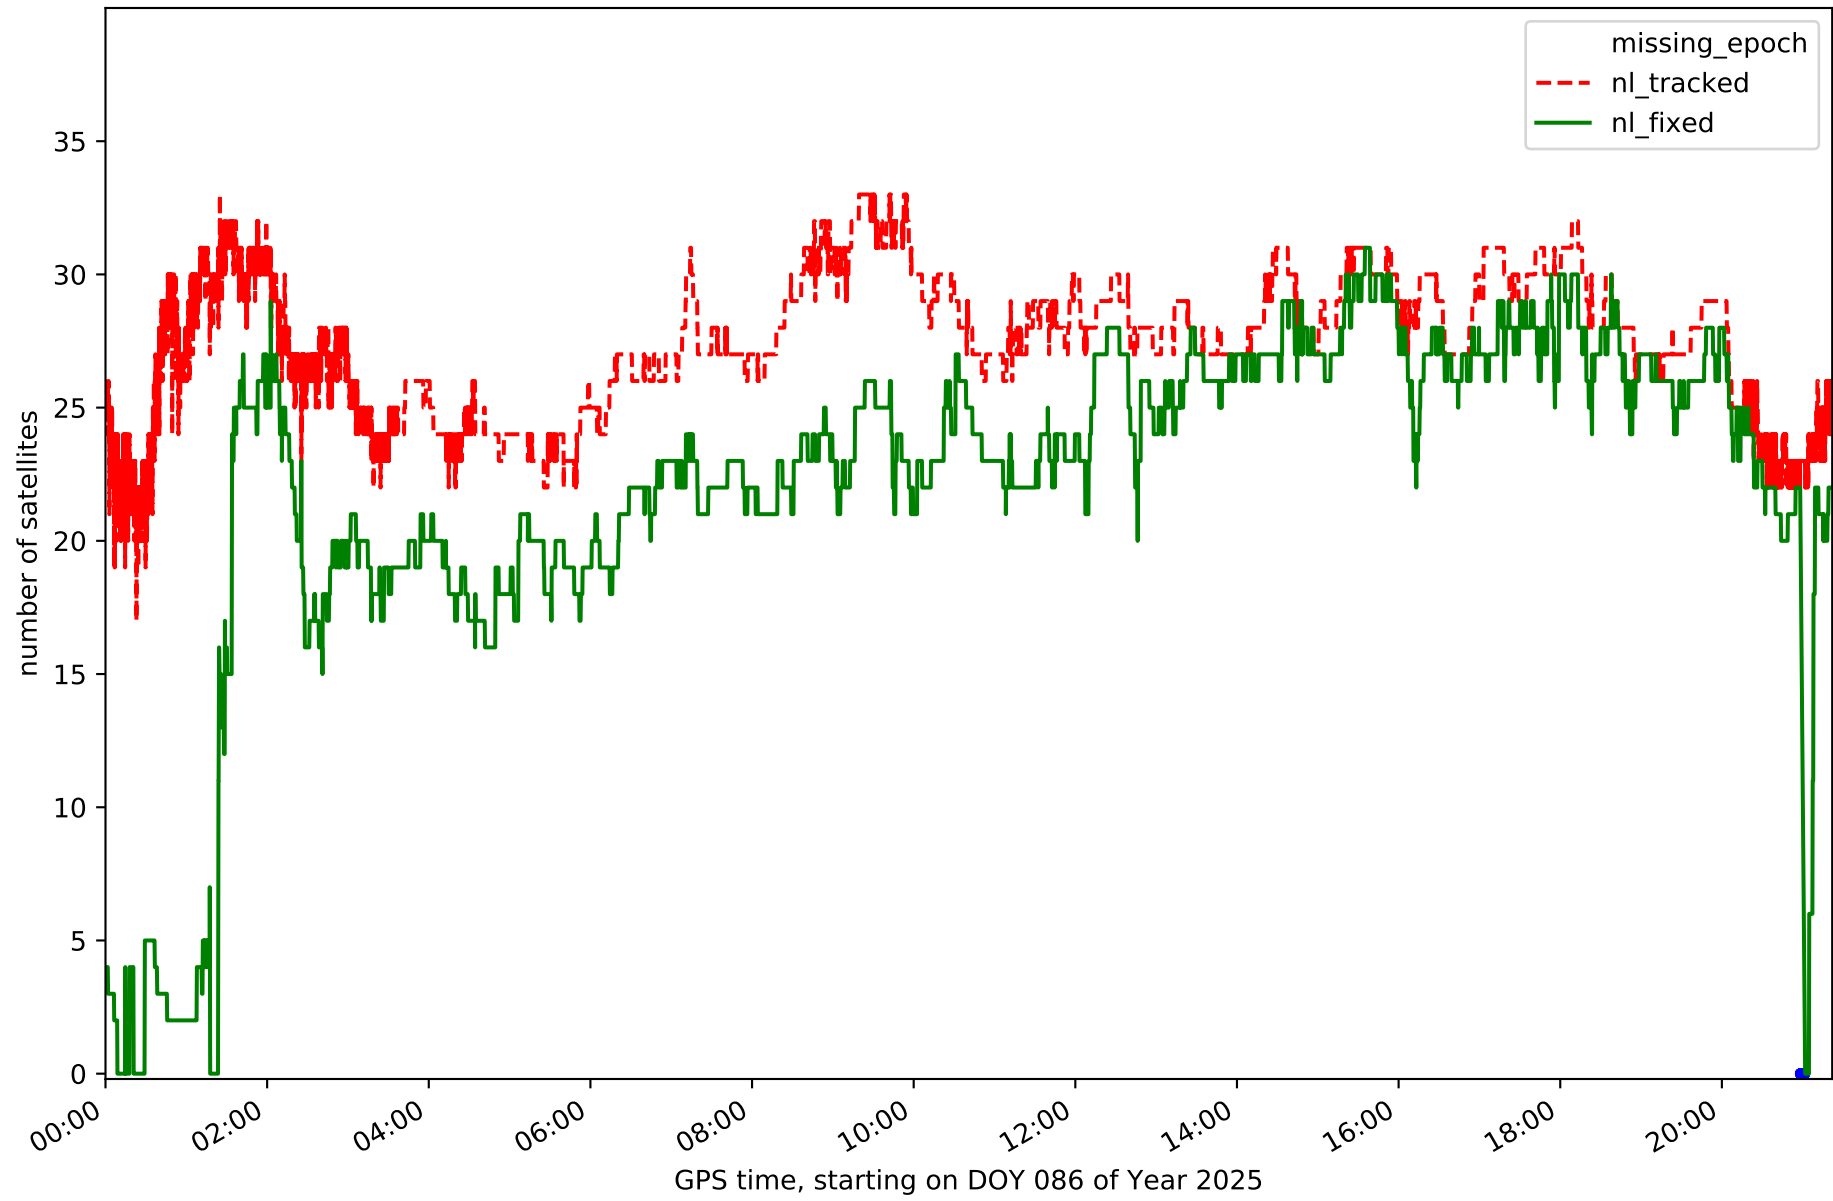


Station TE11 in network N32T

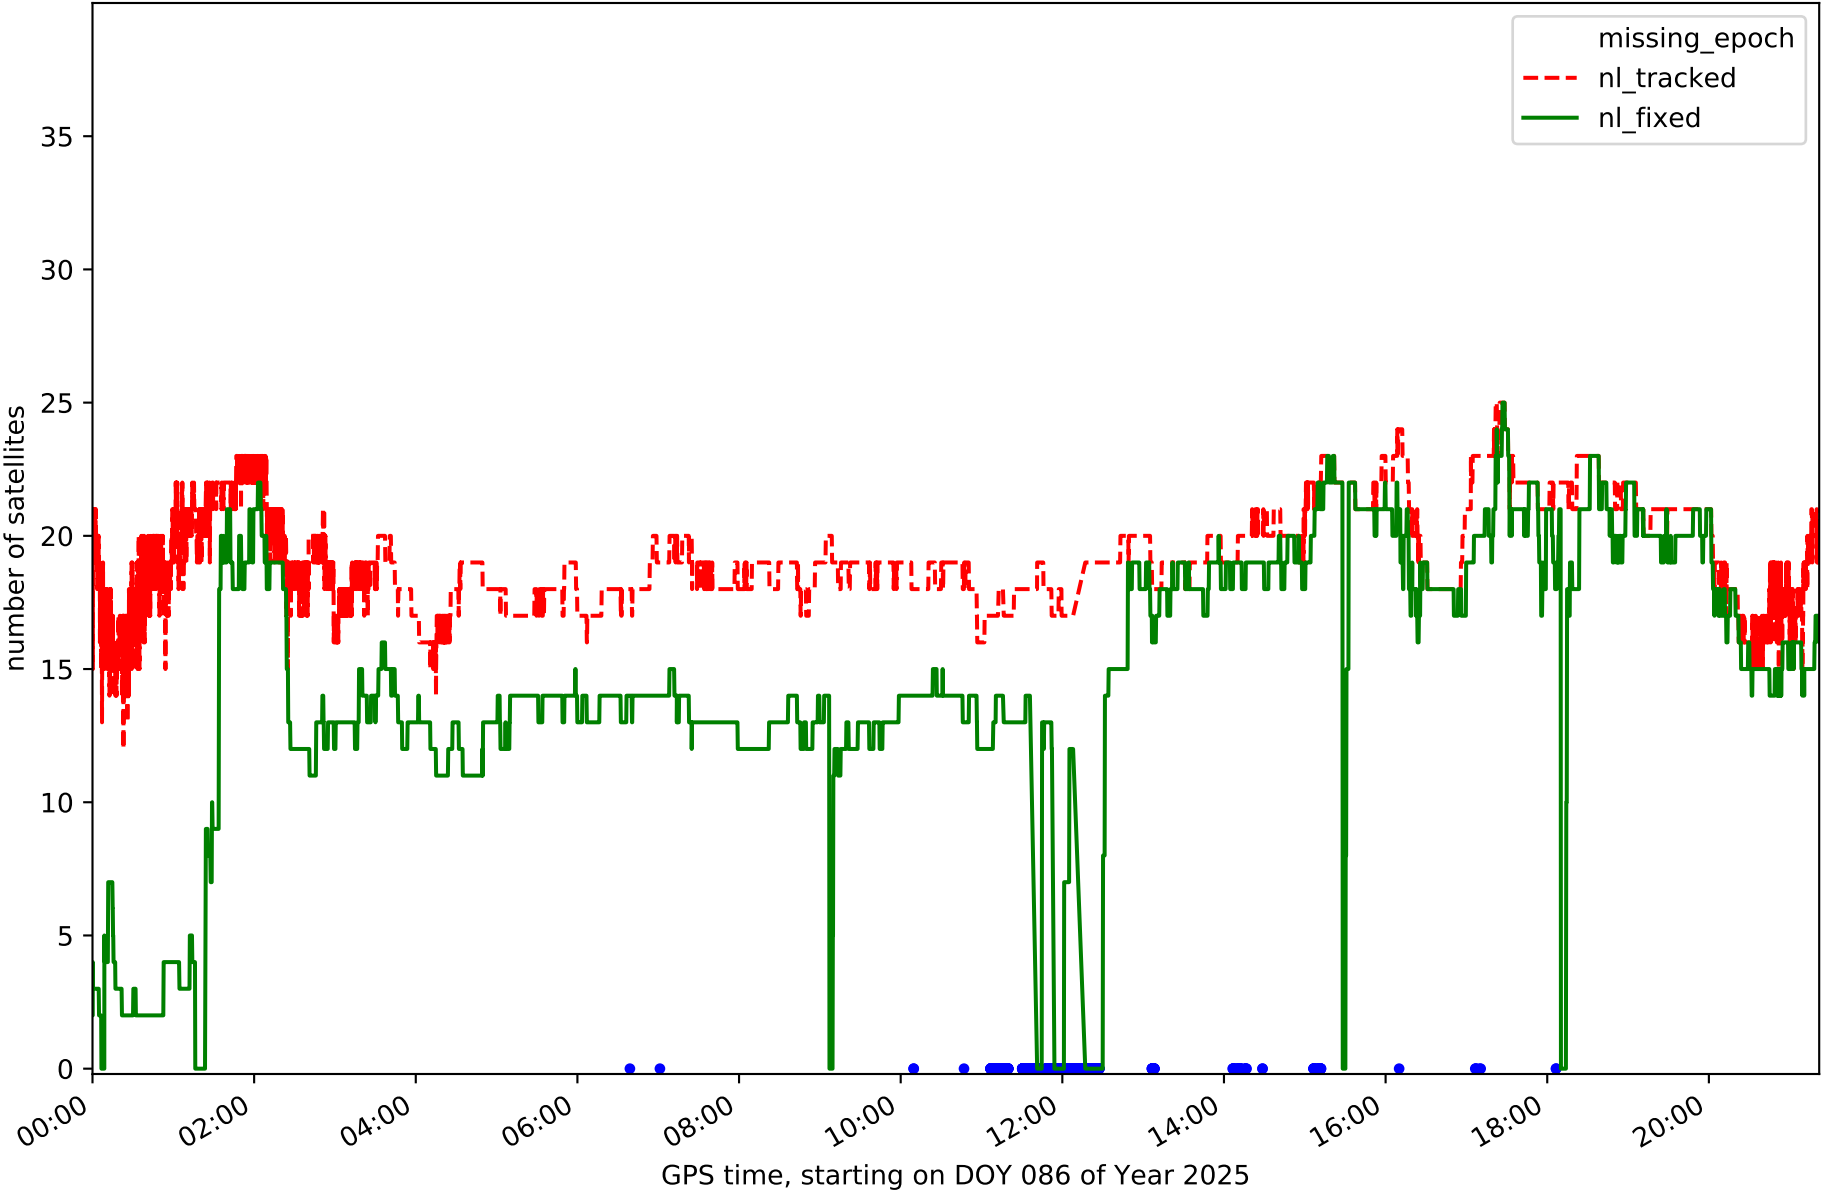


RefCheck for station EH01 in network N32T

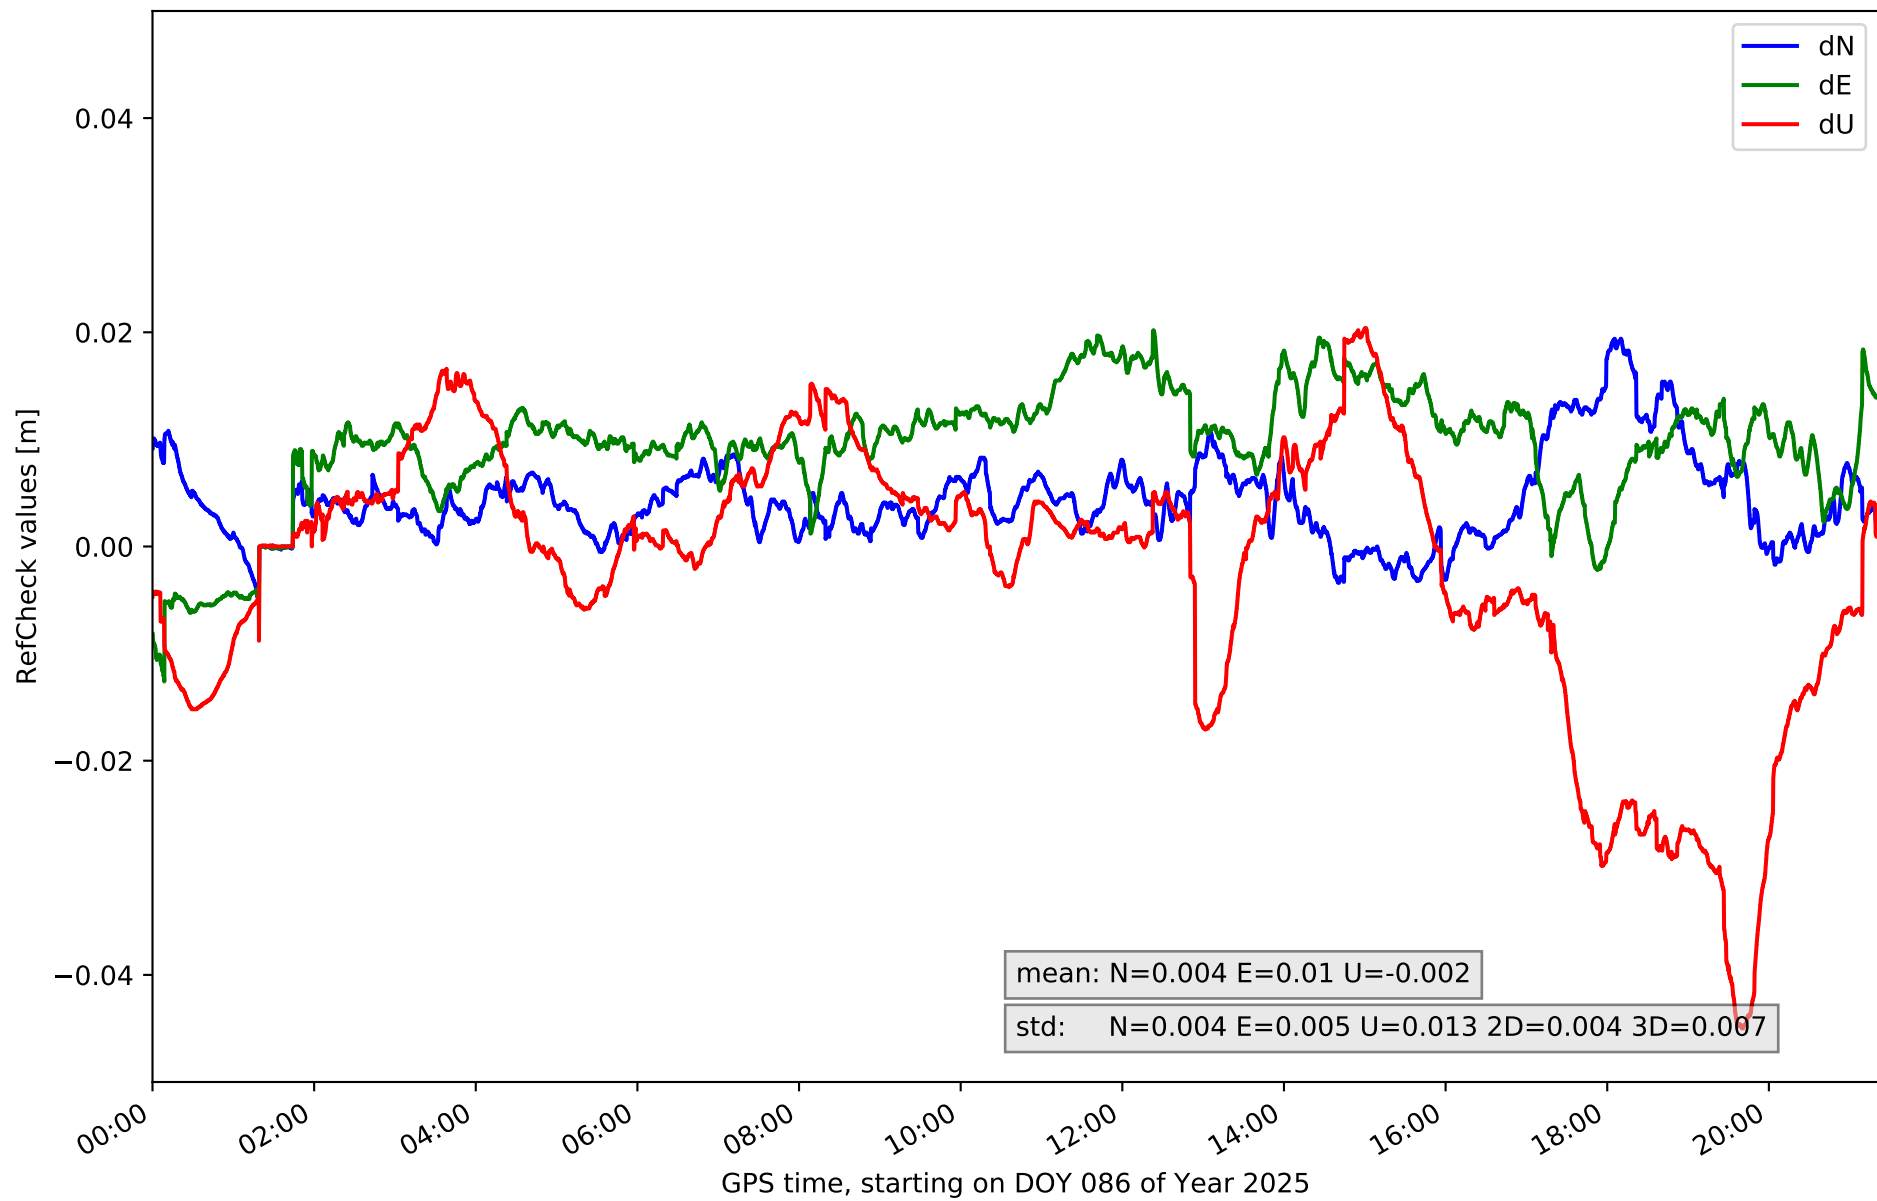


RefCheck for station EH02 in network N32T

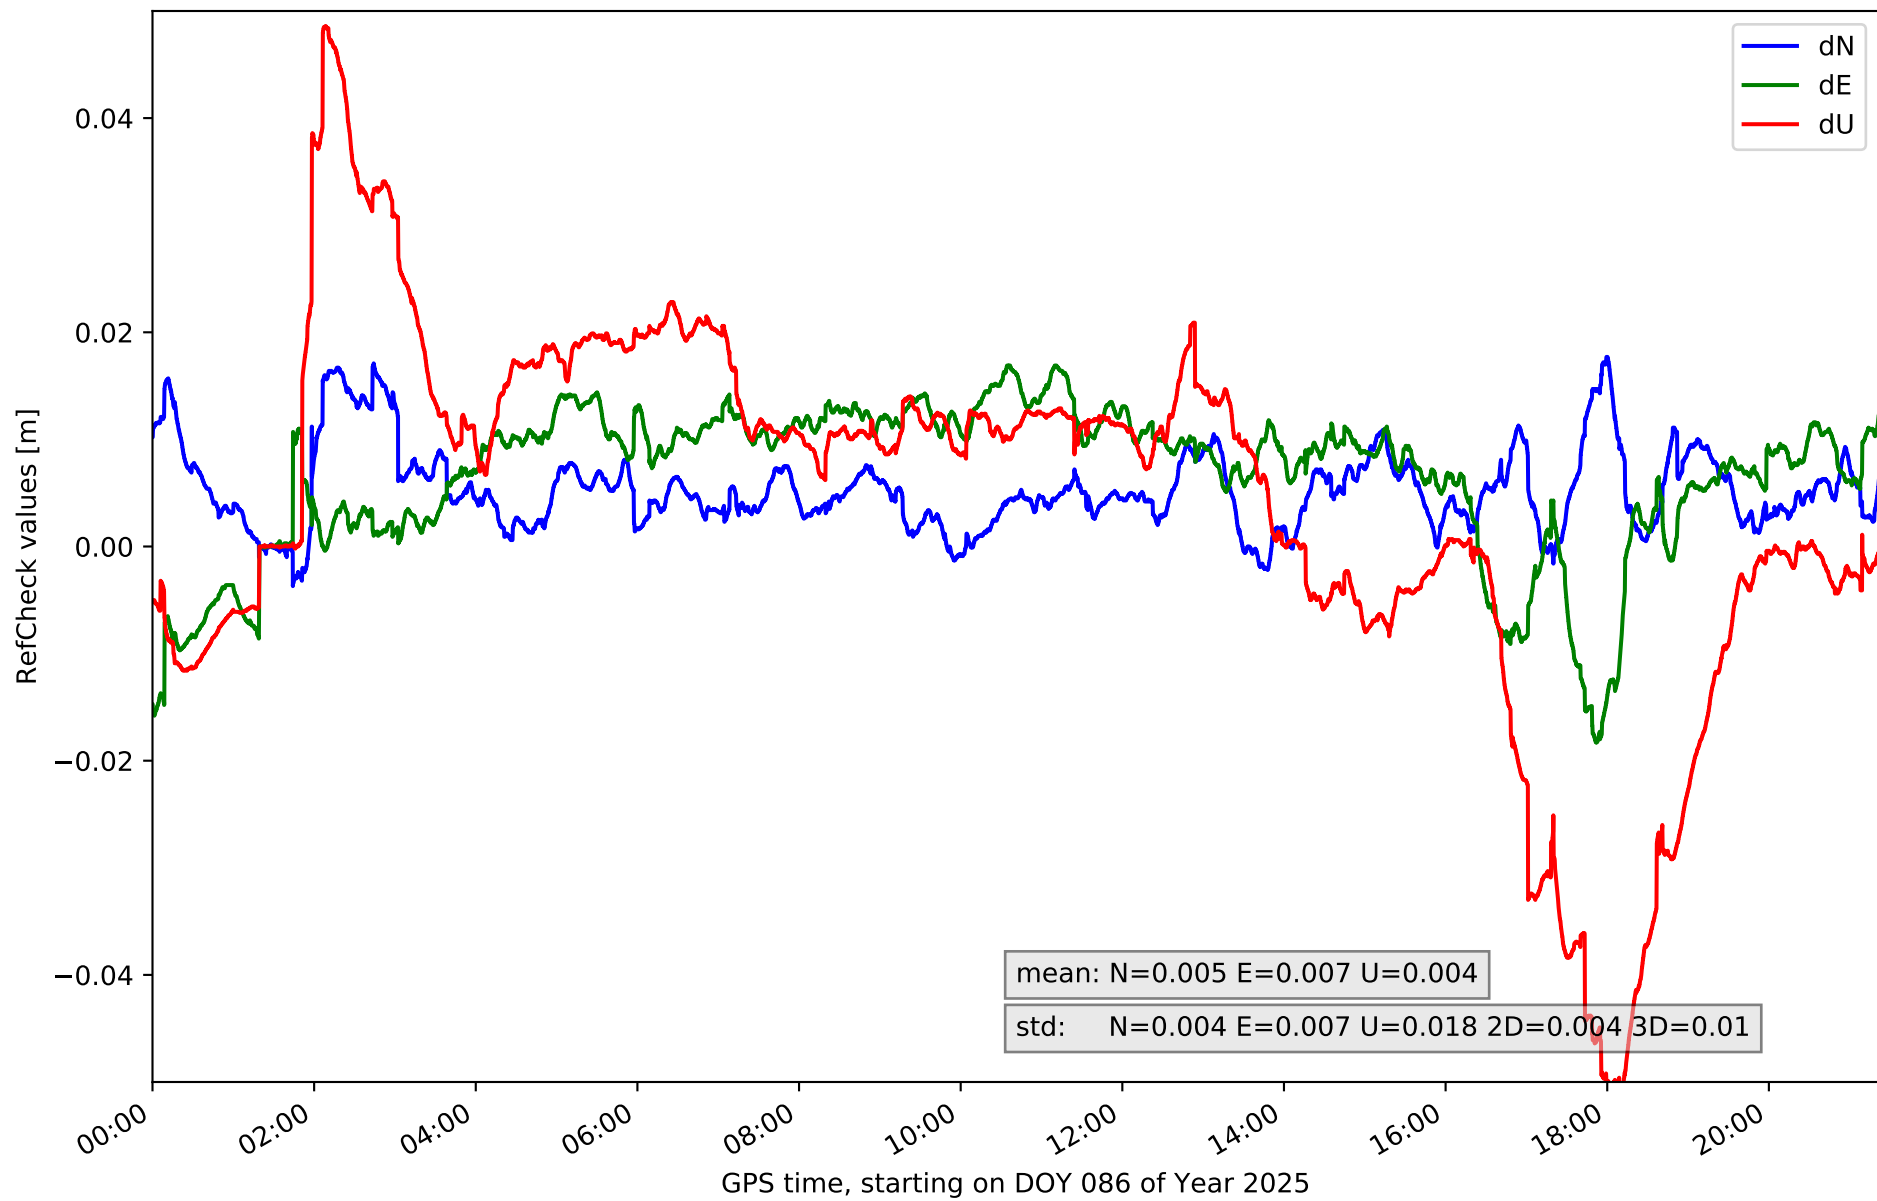


RefCheck for station GOM1 in network N32T

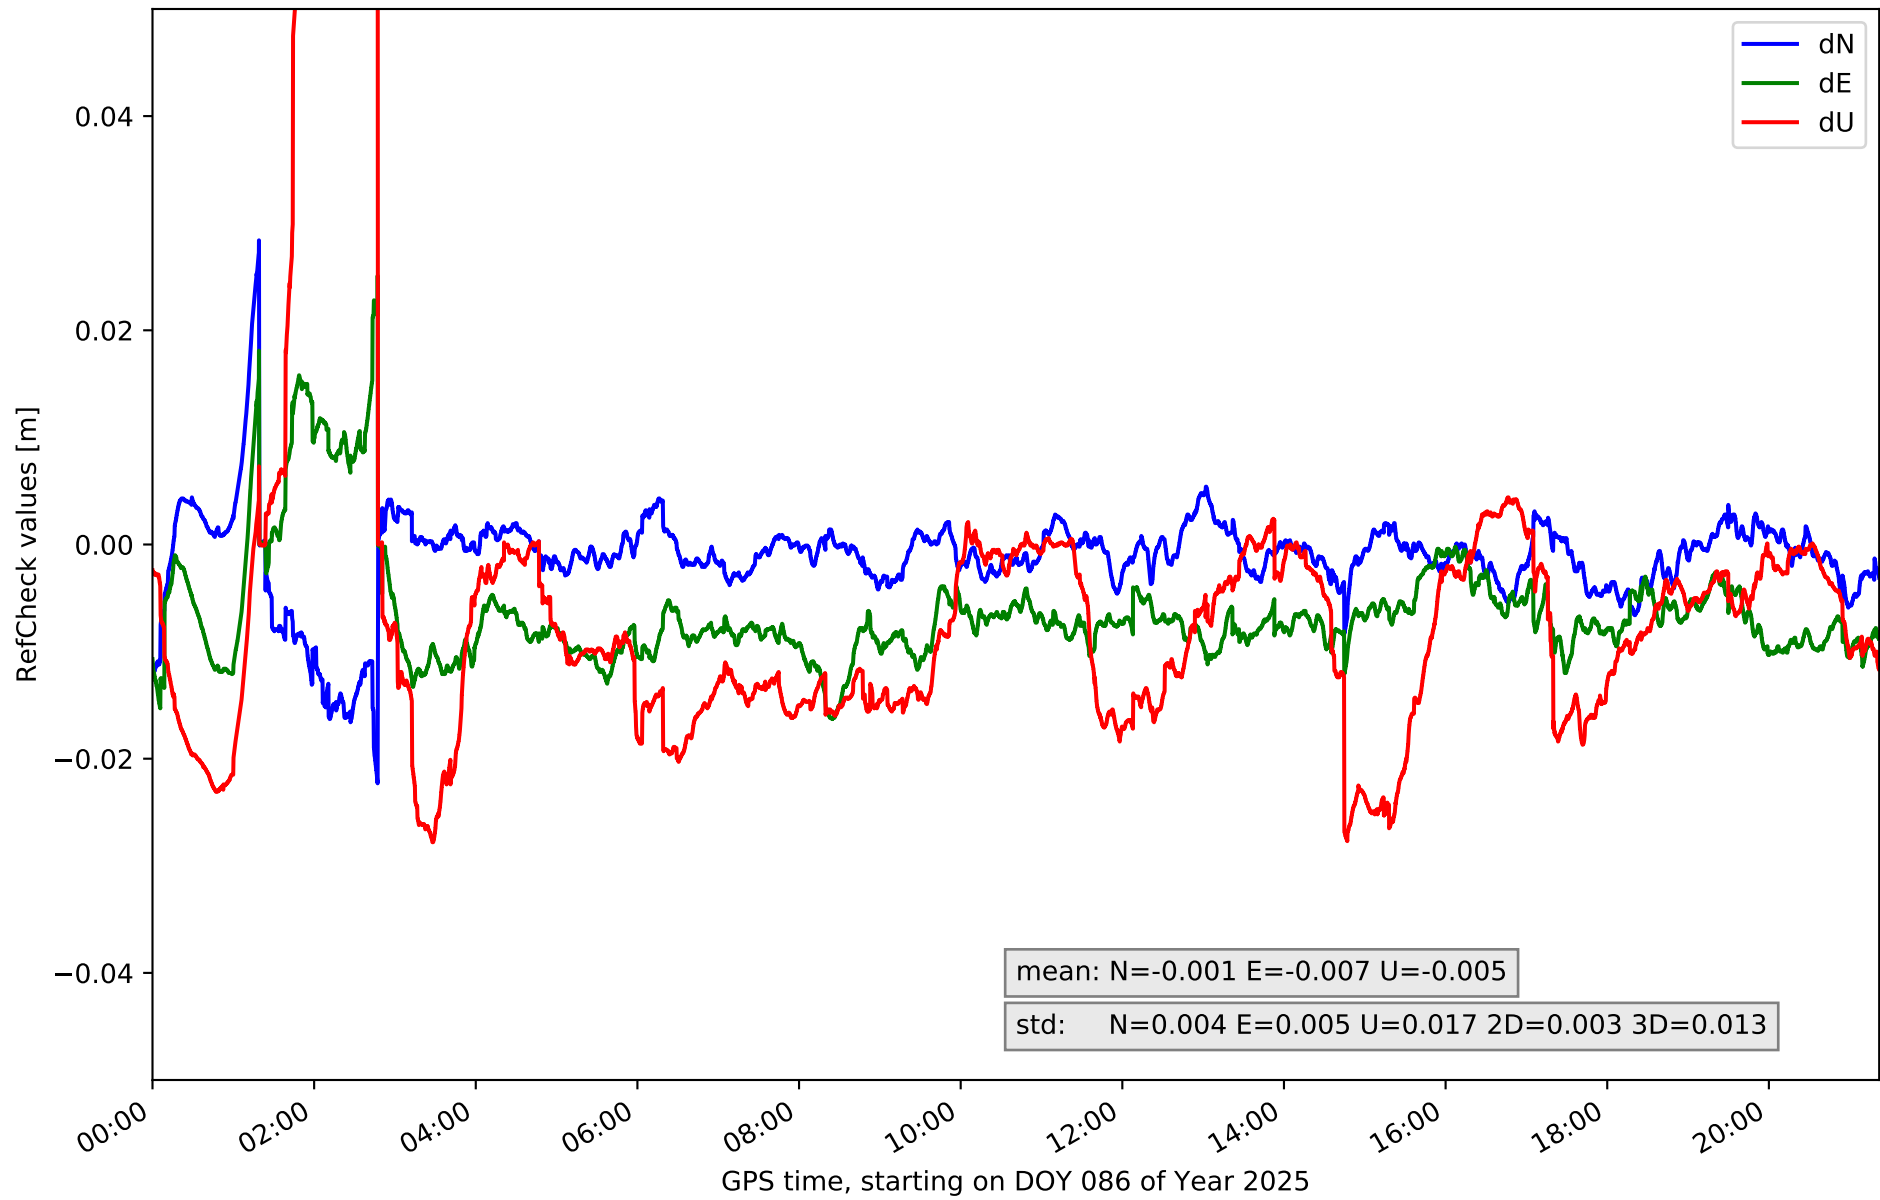


RefCheck for station IZAN in network N32T

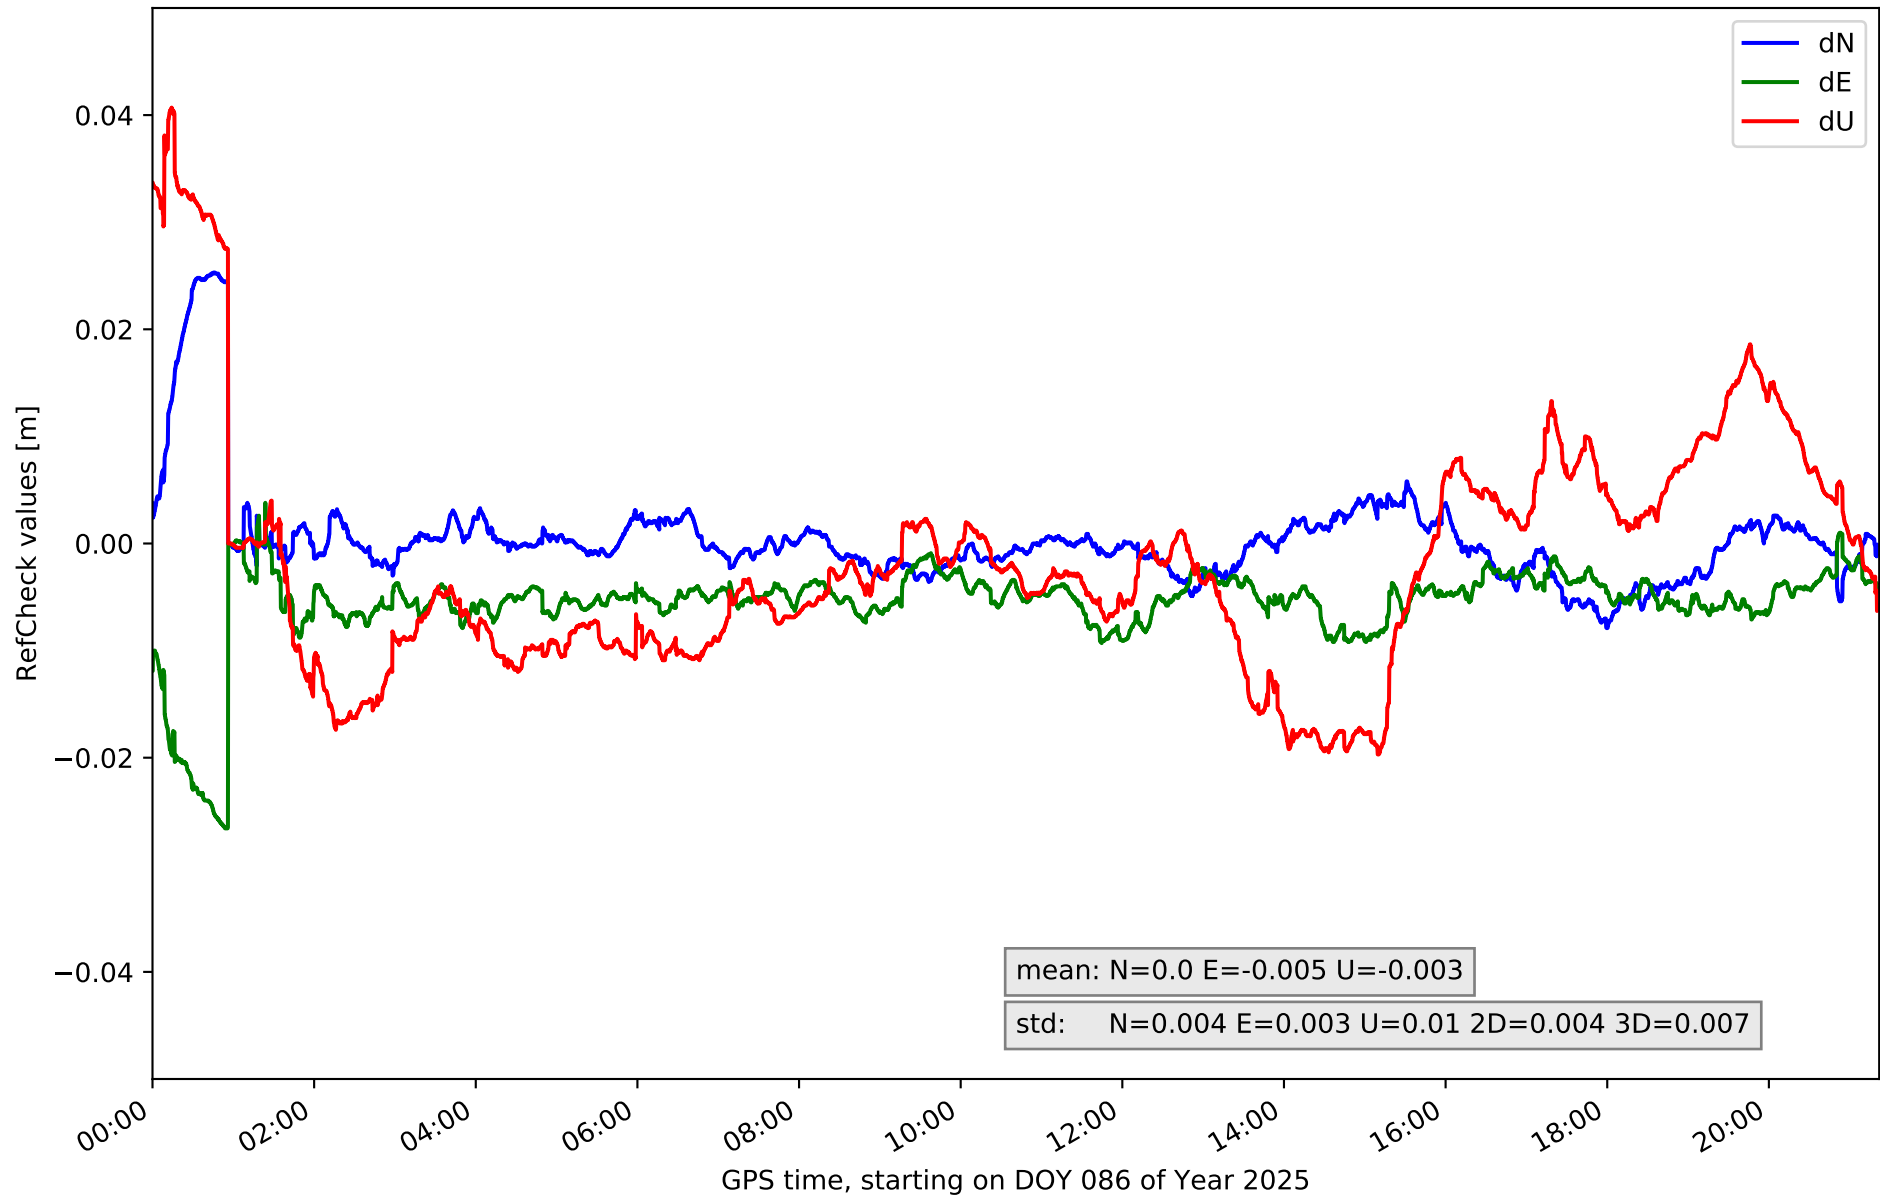


RefCheck for station LP01 in network N32T

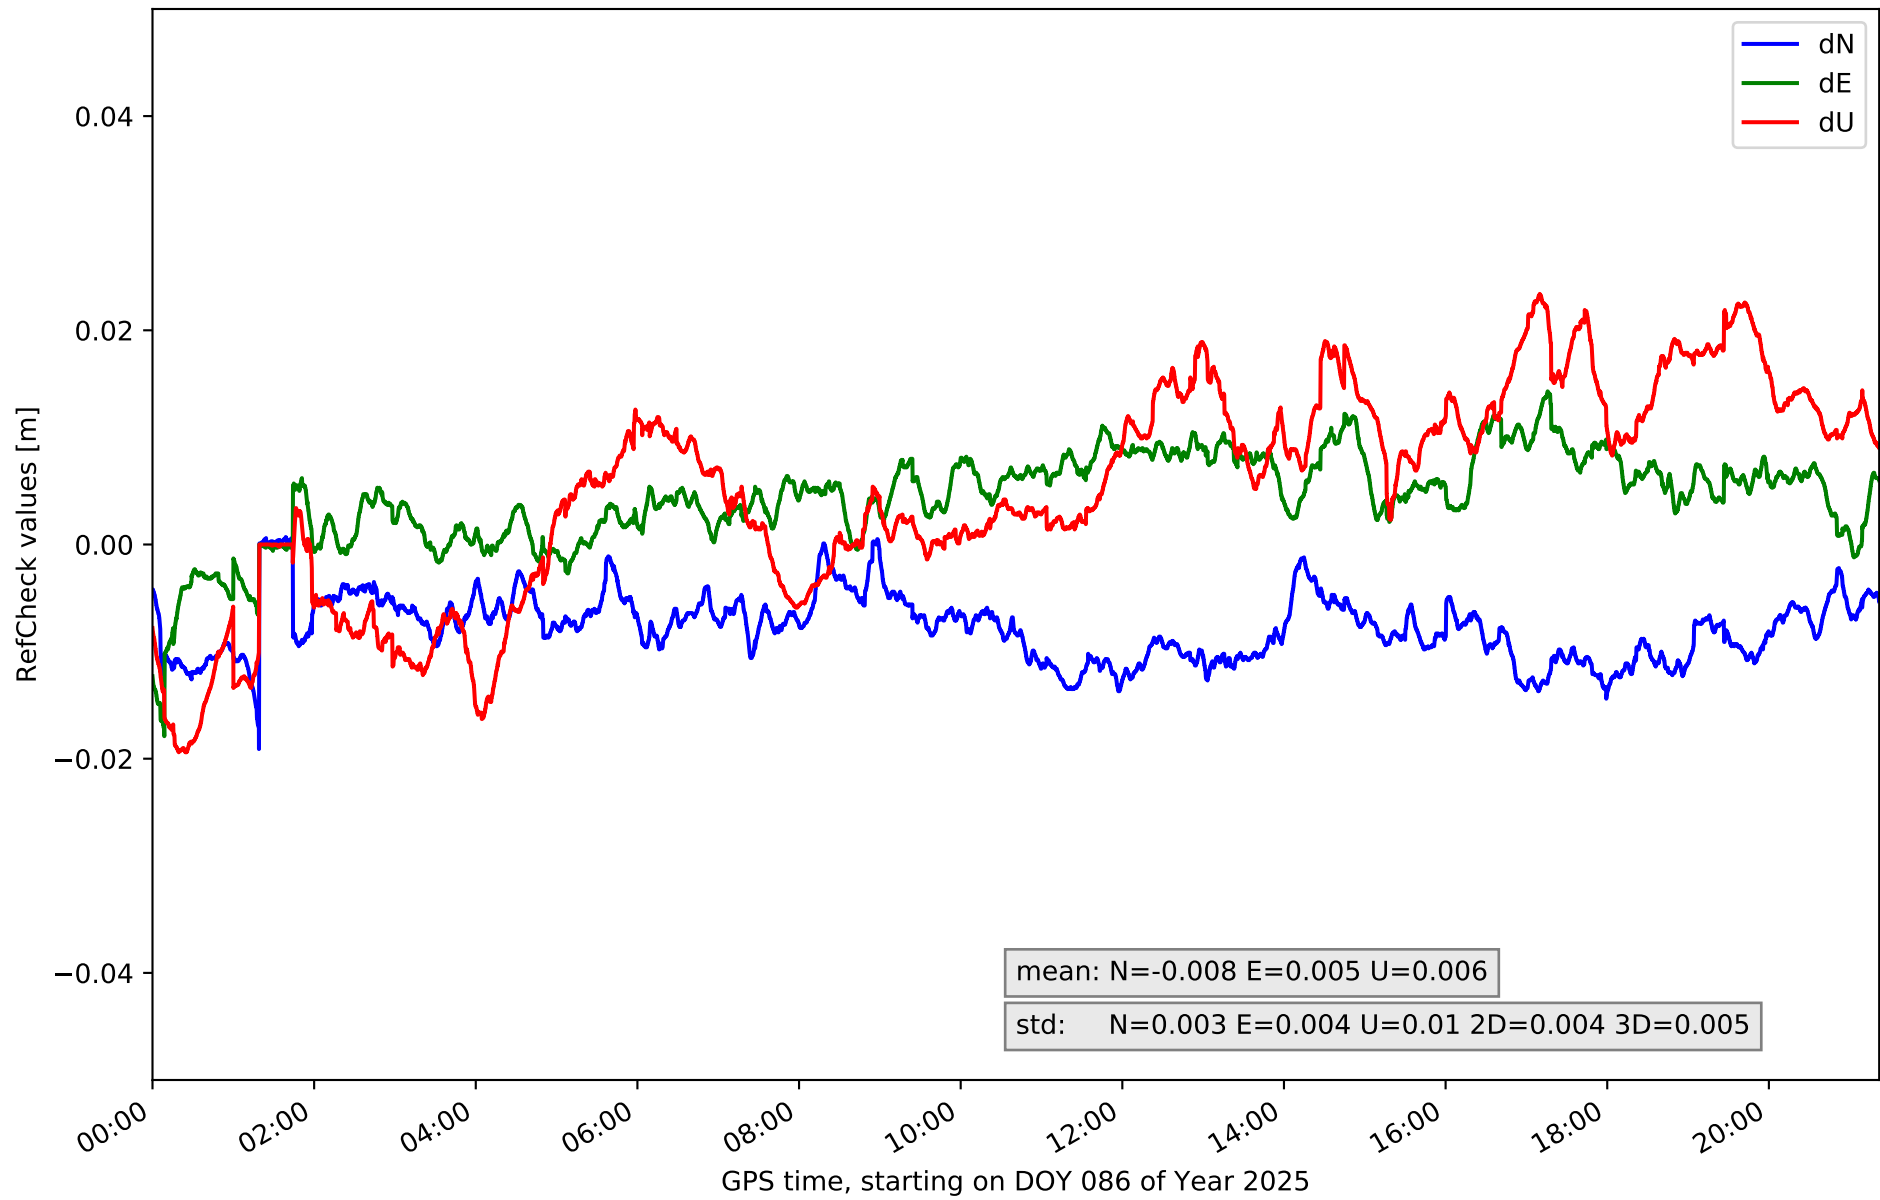


RefCheck for station LP03 in network N32T

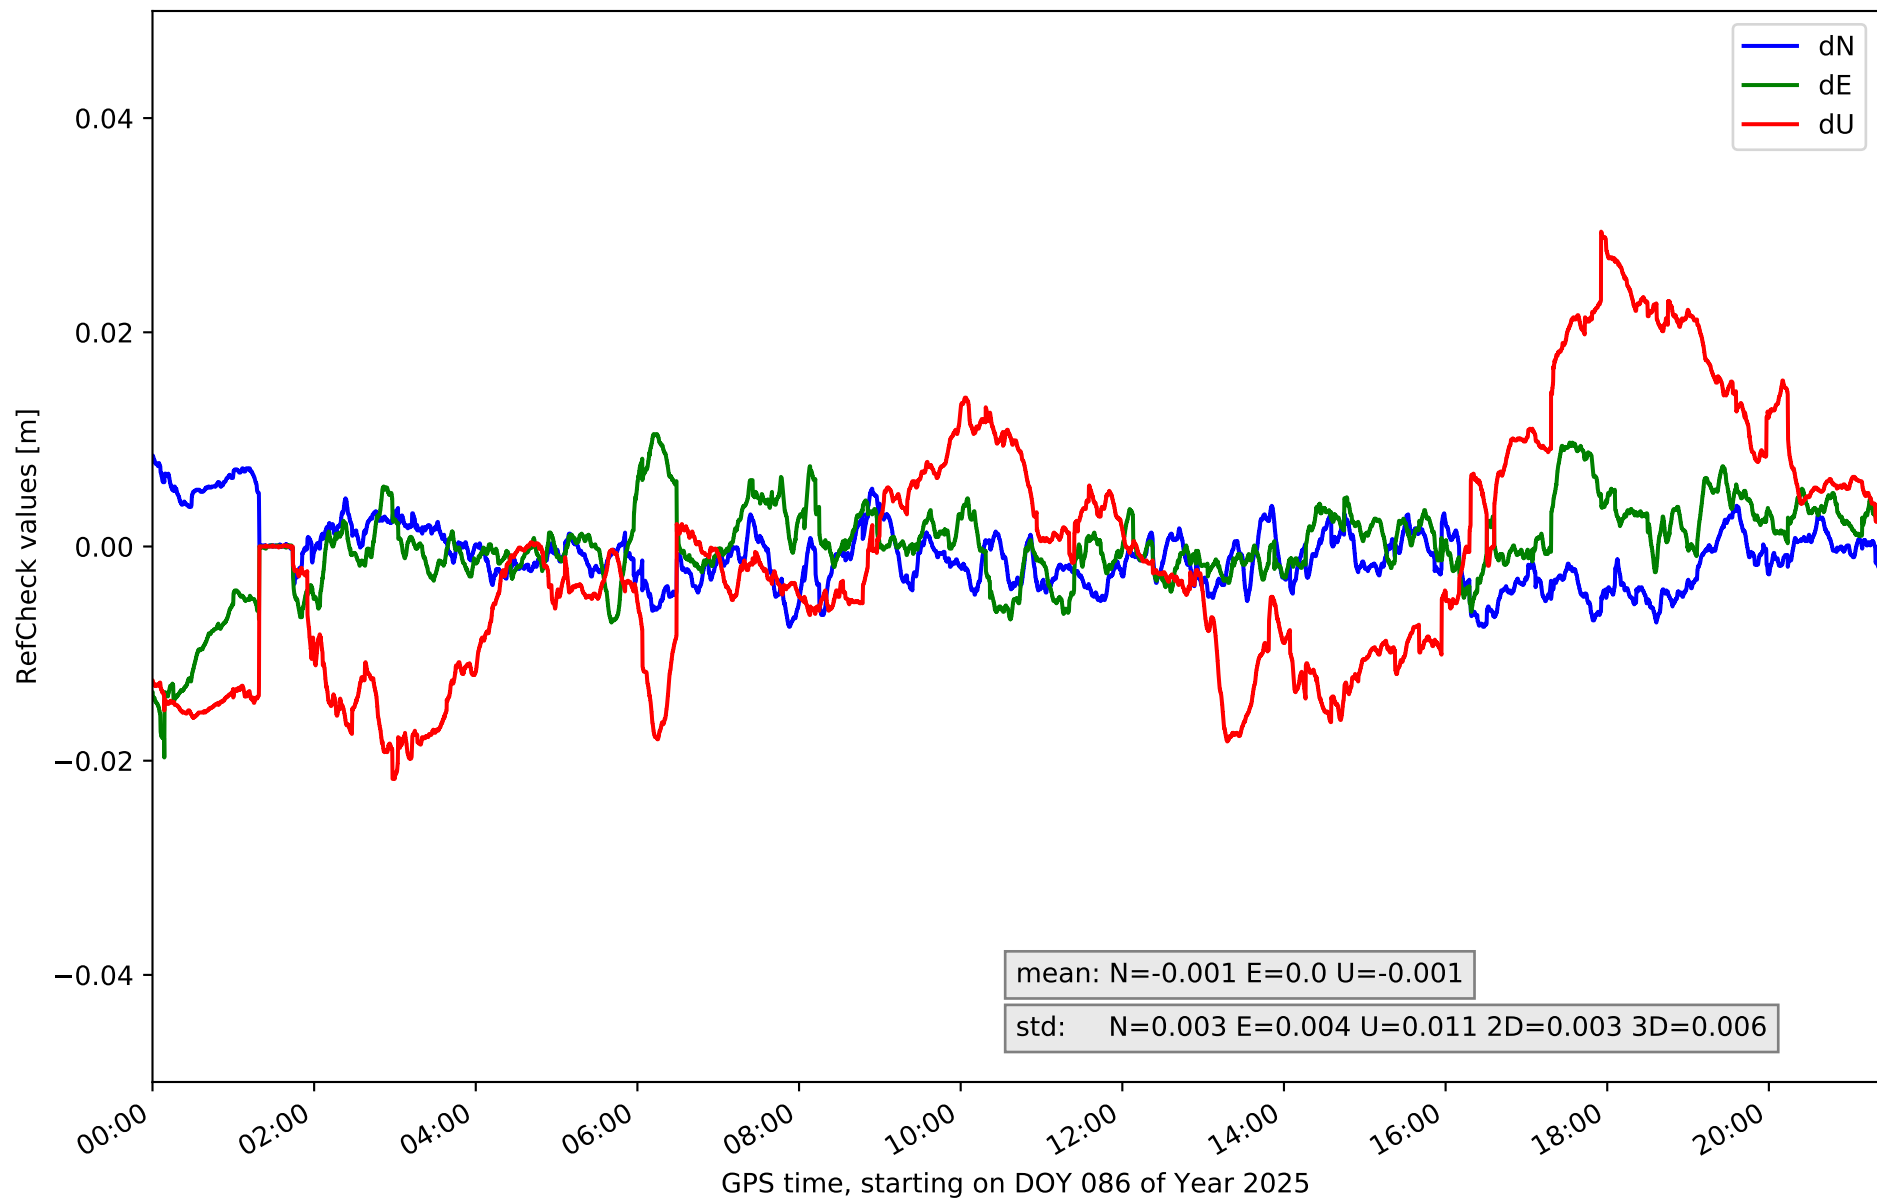


RefCheck for station LPAL in network N32T

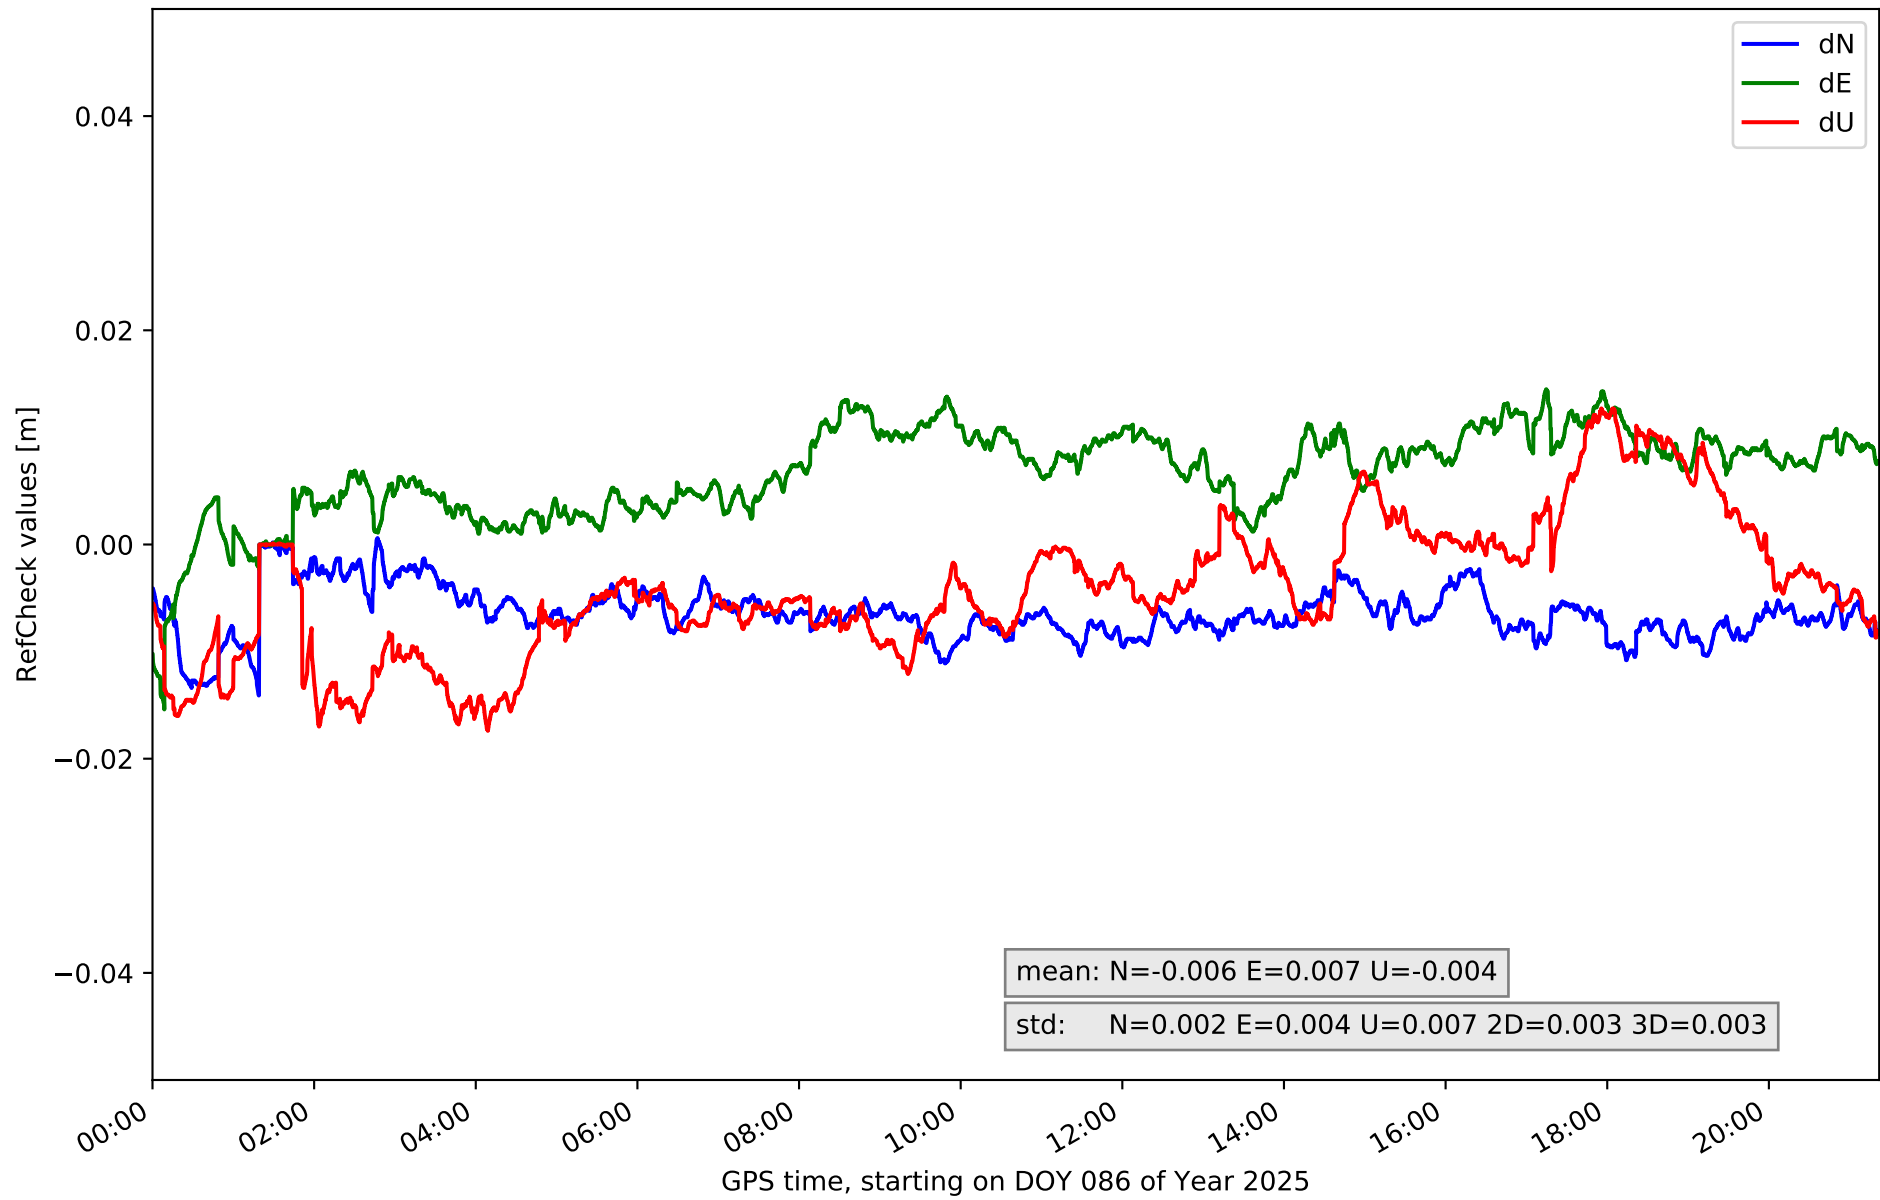


RefCheck for station LRES in network N32T

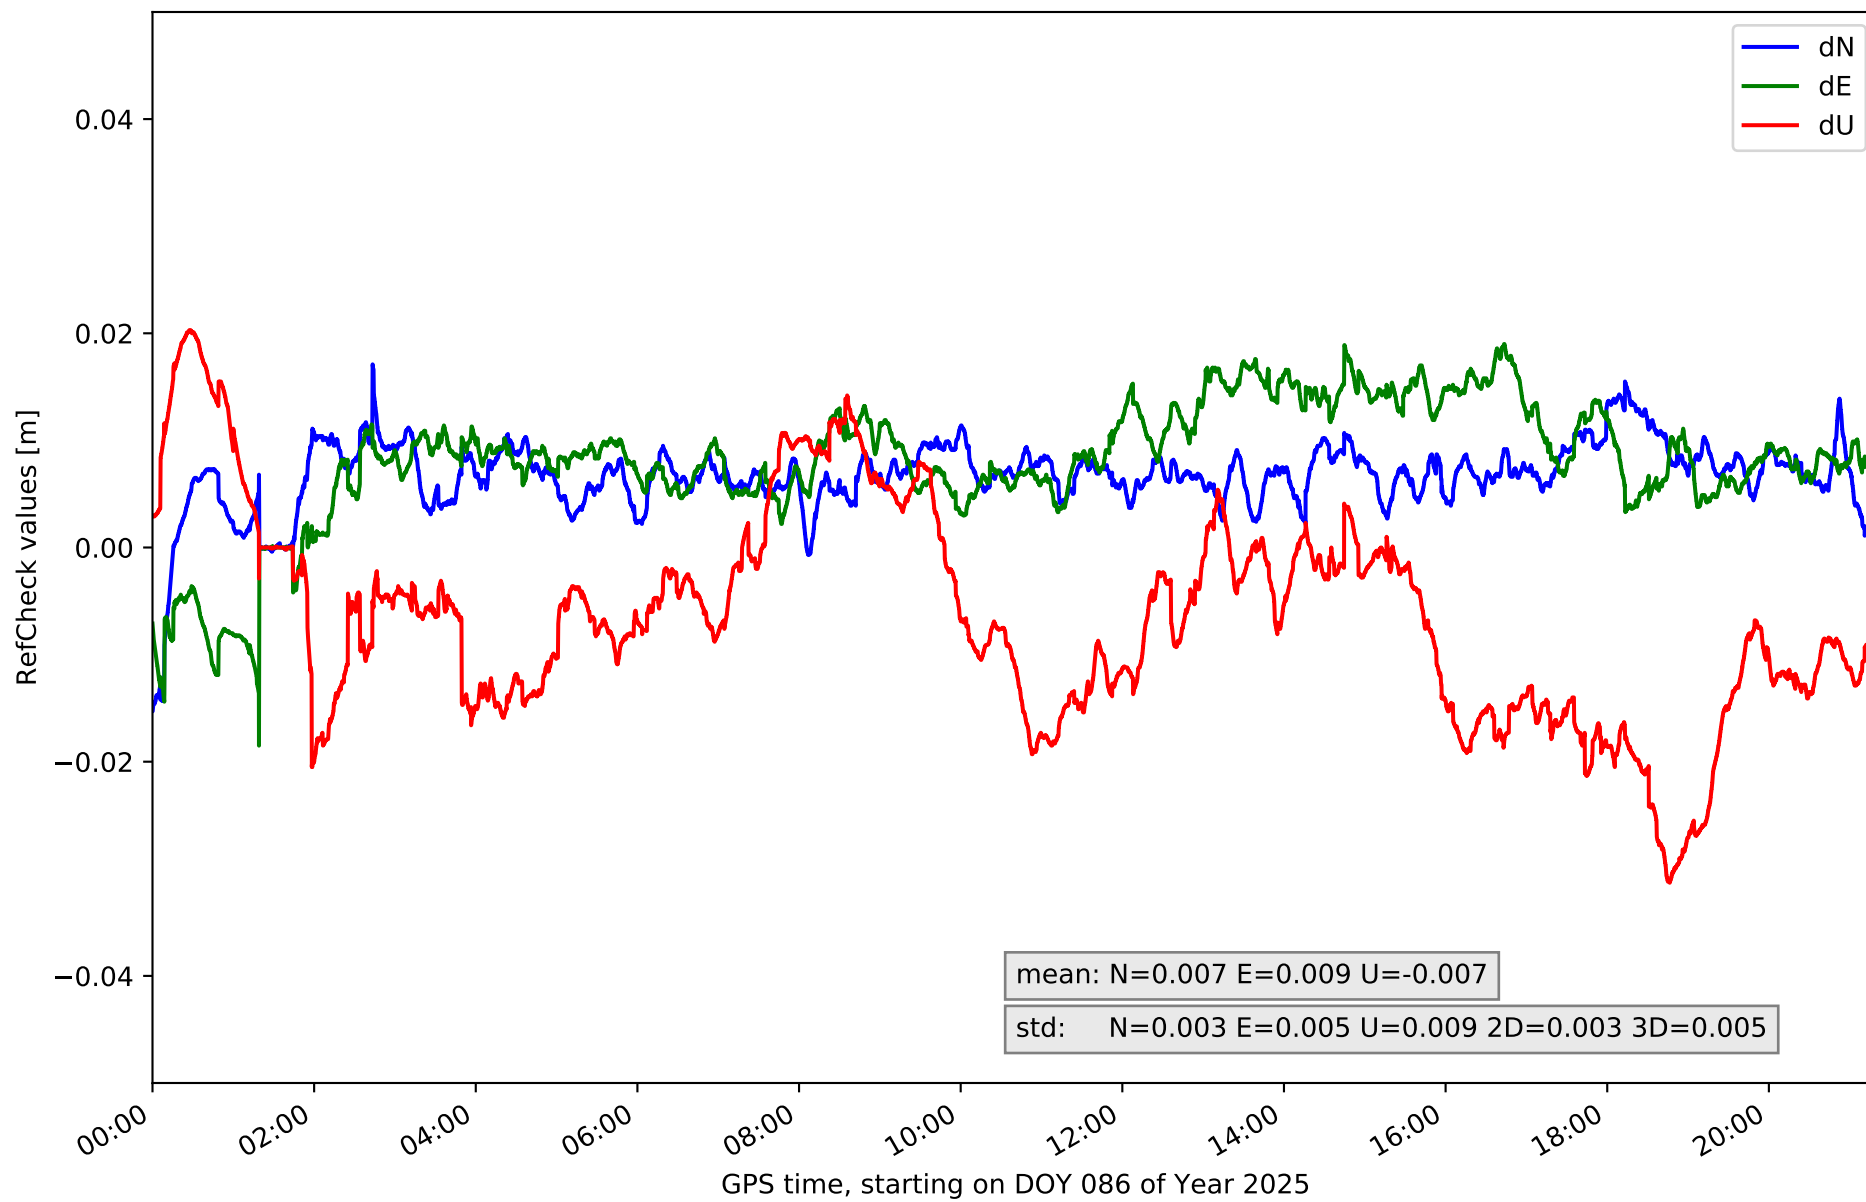


RefCheck for station TN01 in network N32T

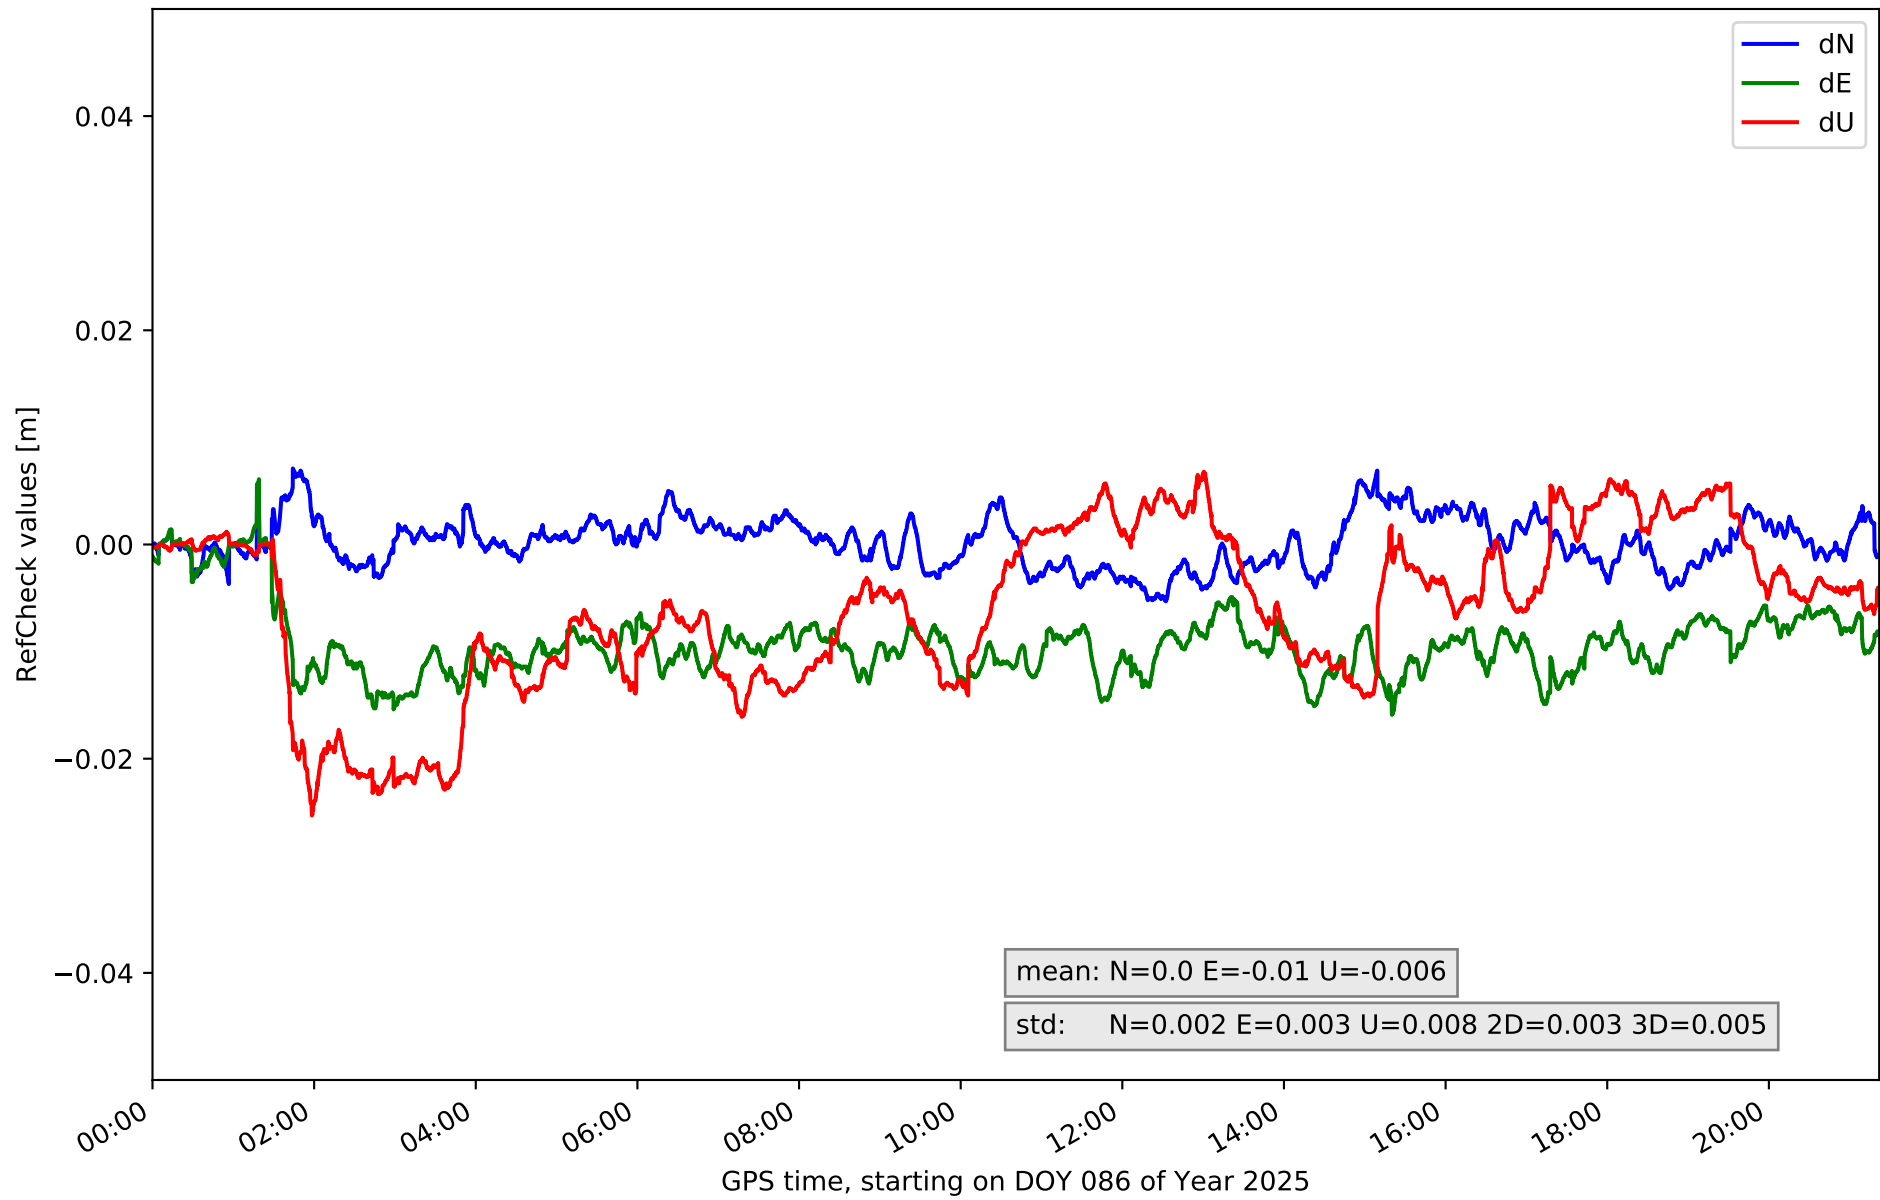


RefCheck for station TN02 in network N32T

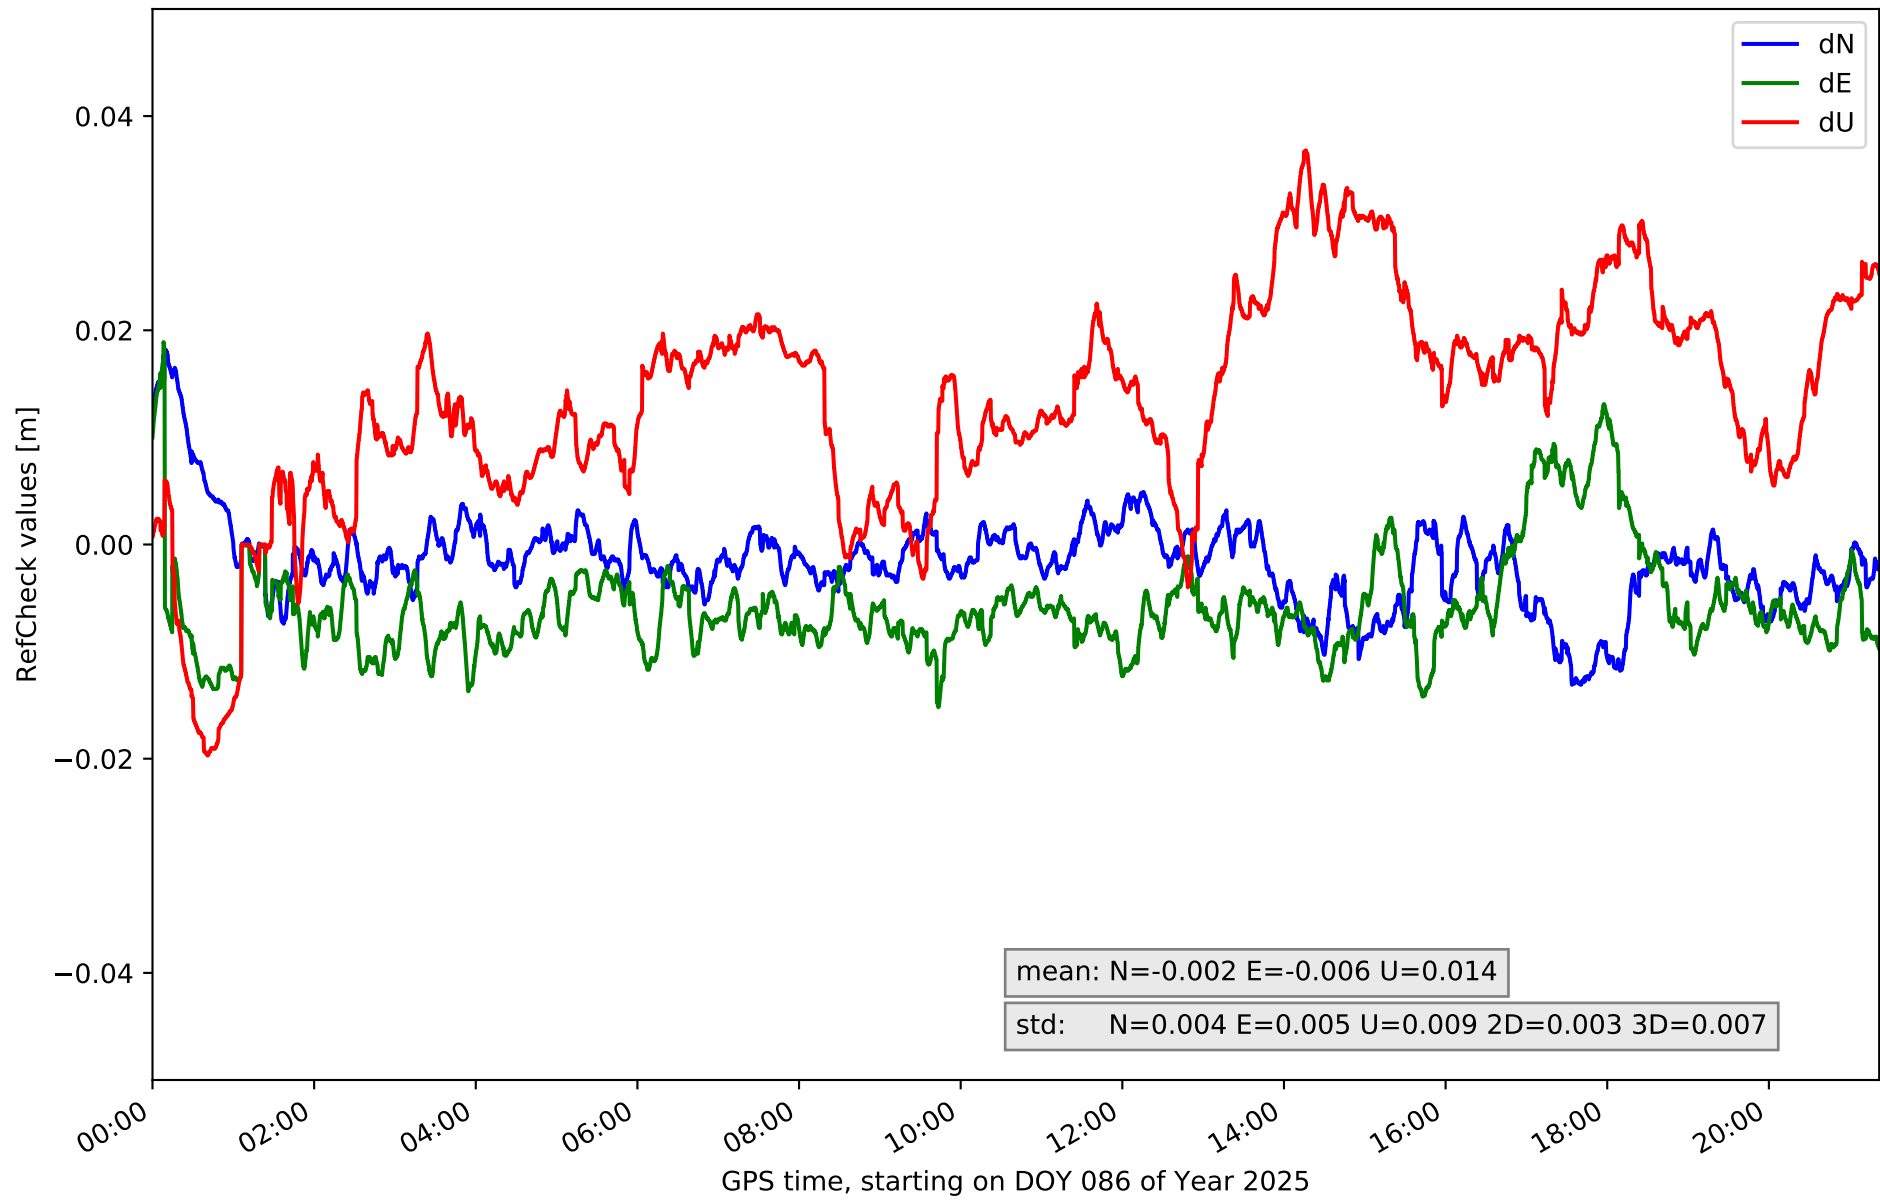


RefCheck for station TN03 in network N32T

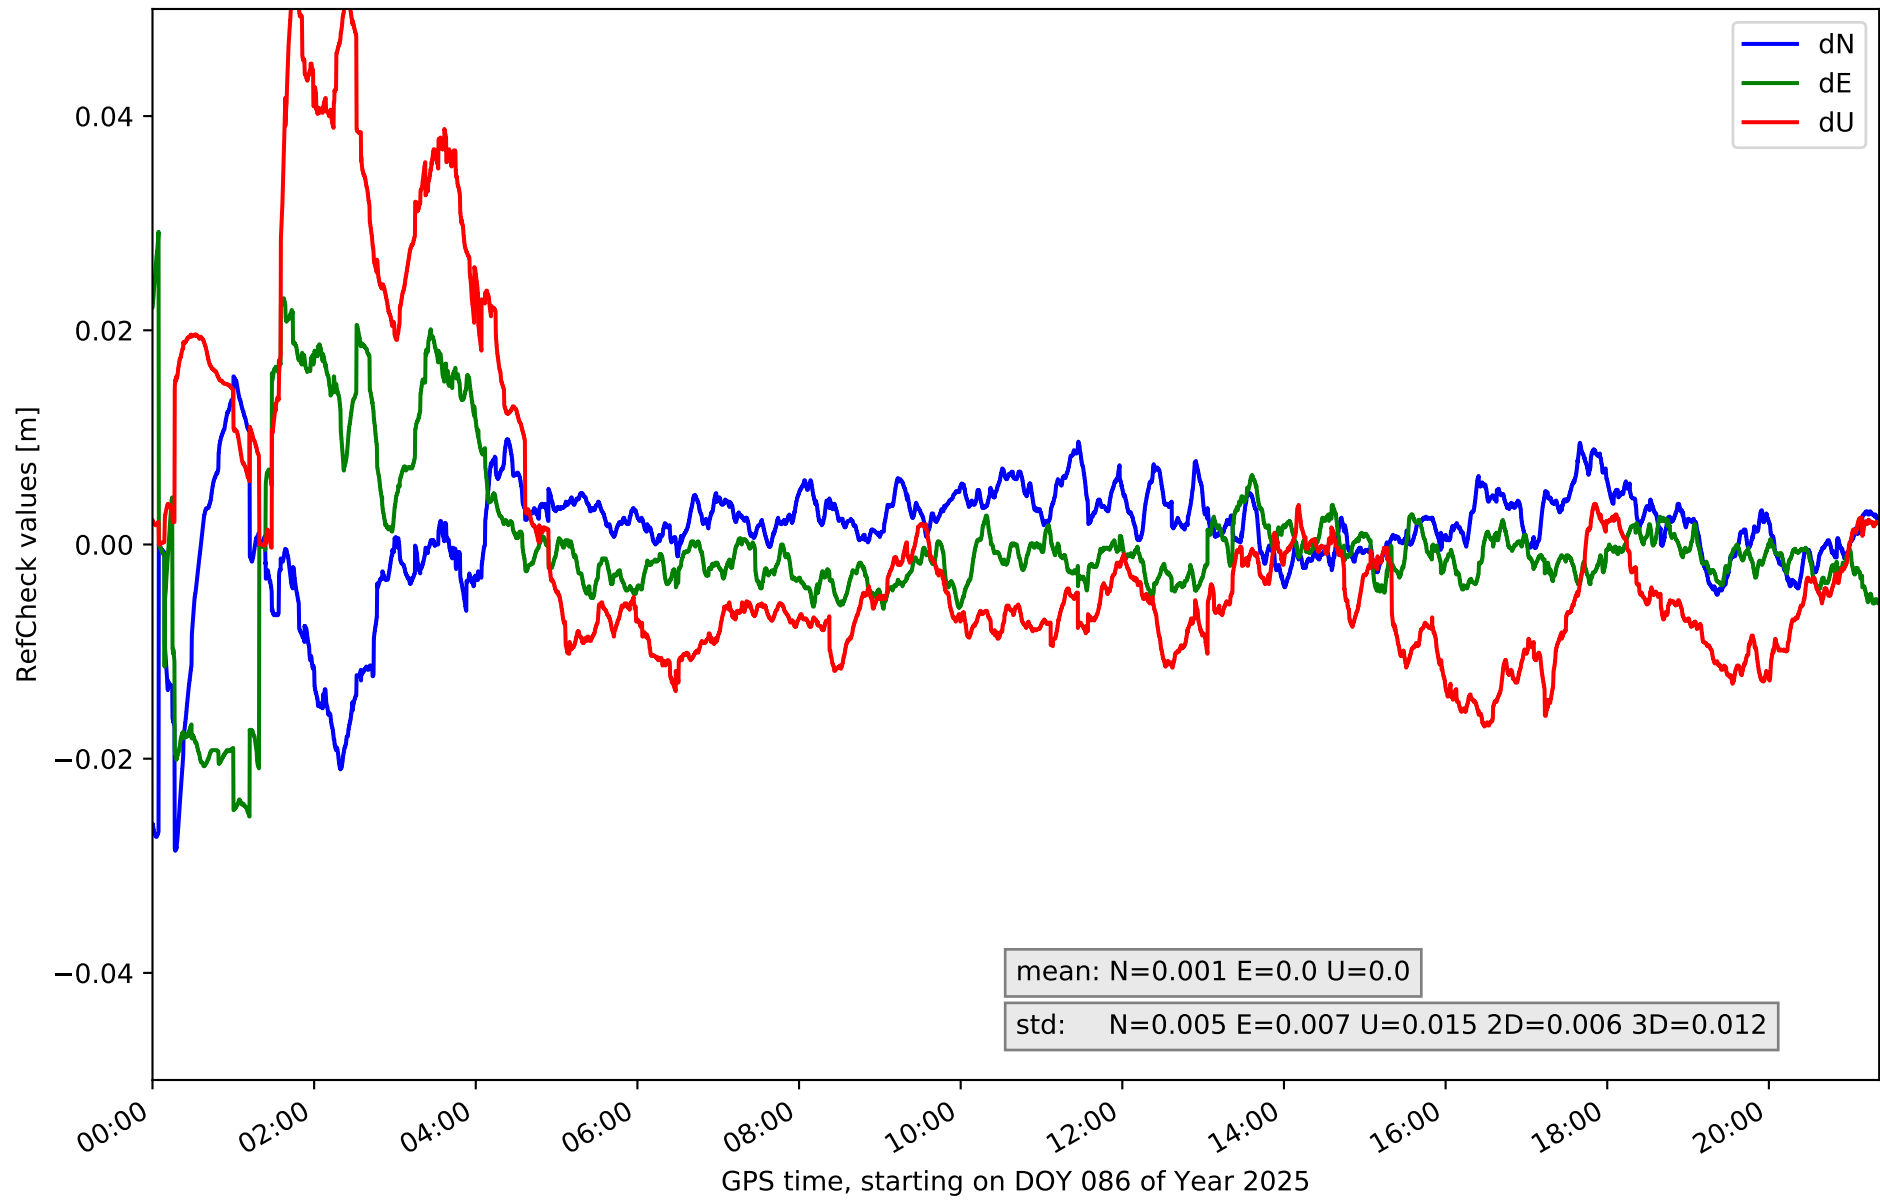


RefCheck for station TN04 in network N32T

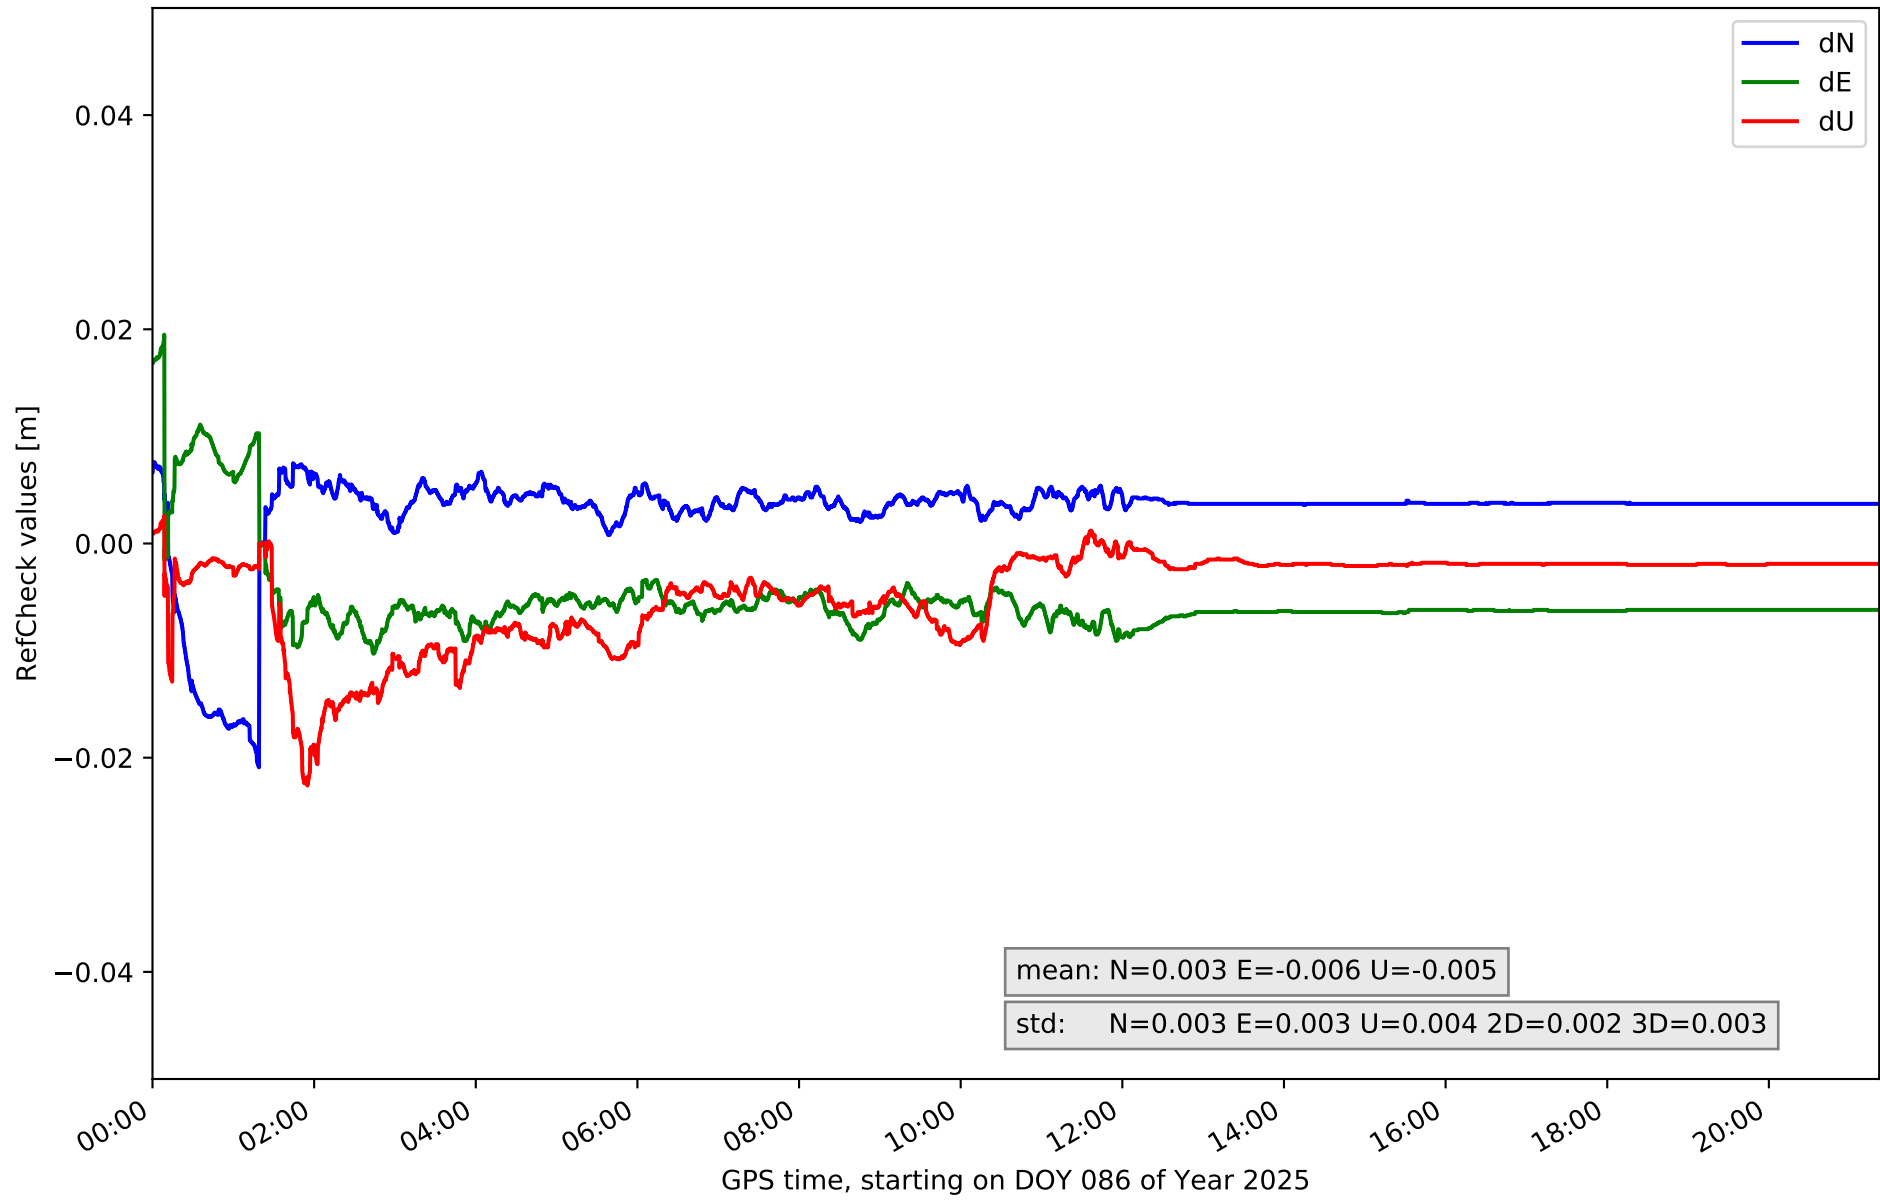


RefCheck for station TN06 in network N32T

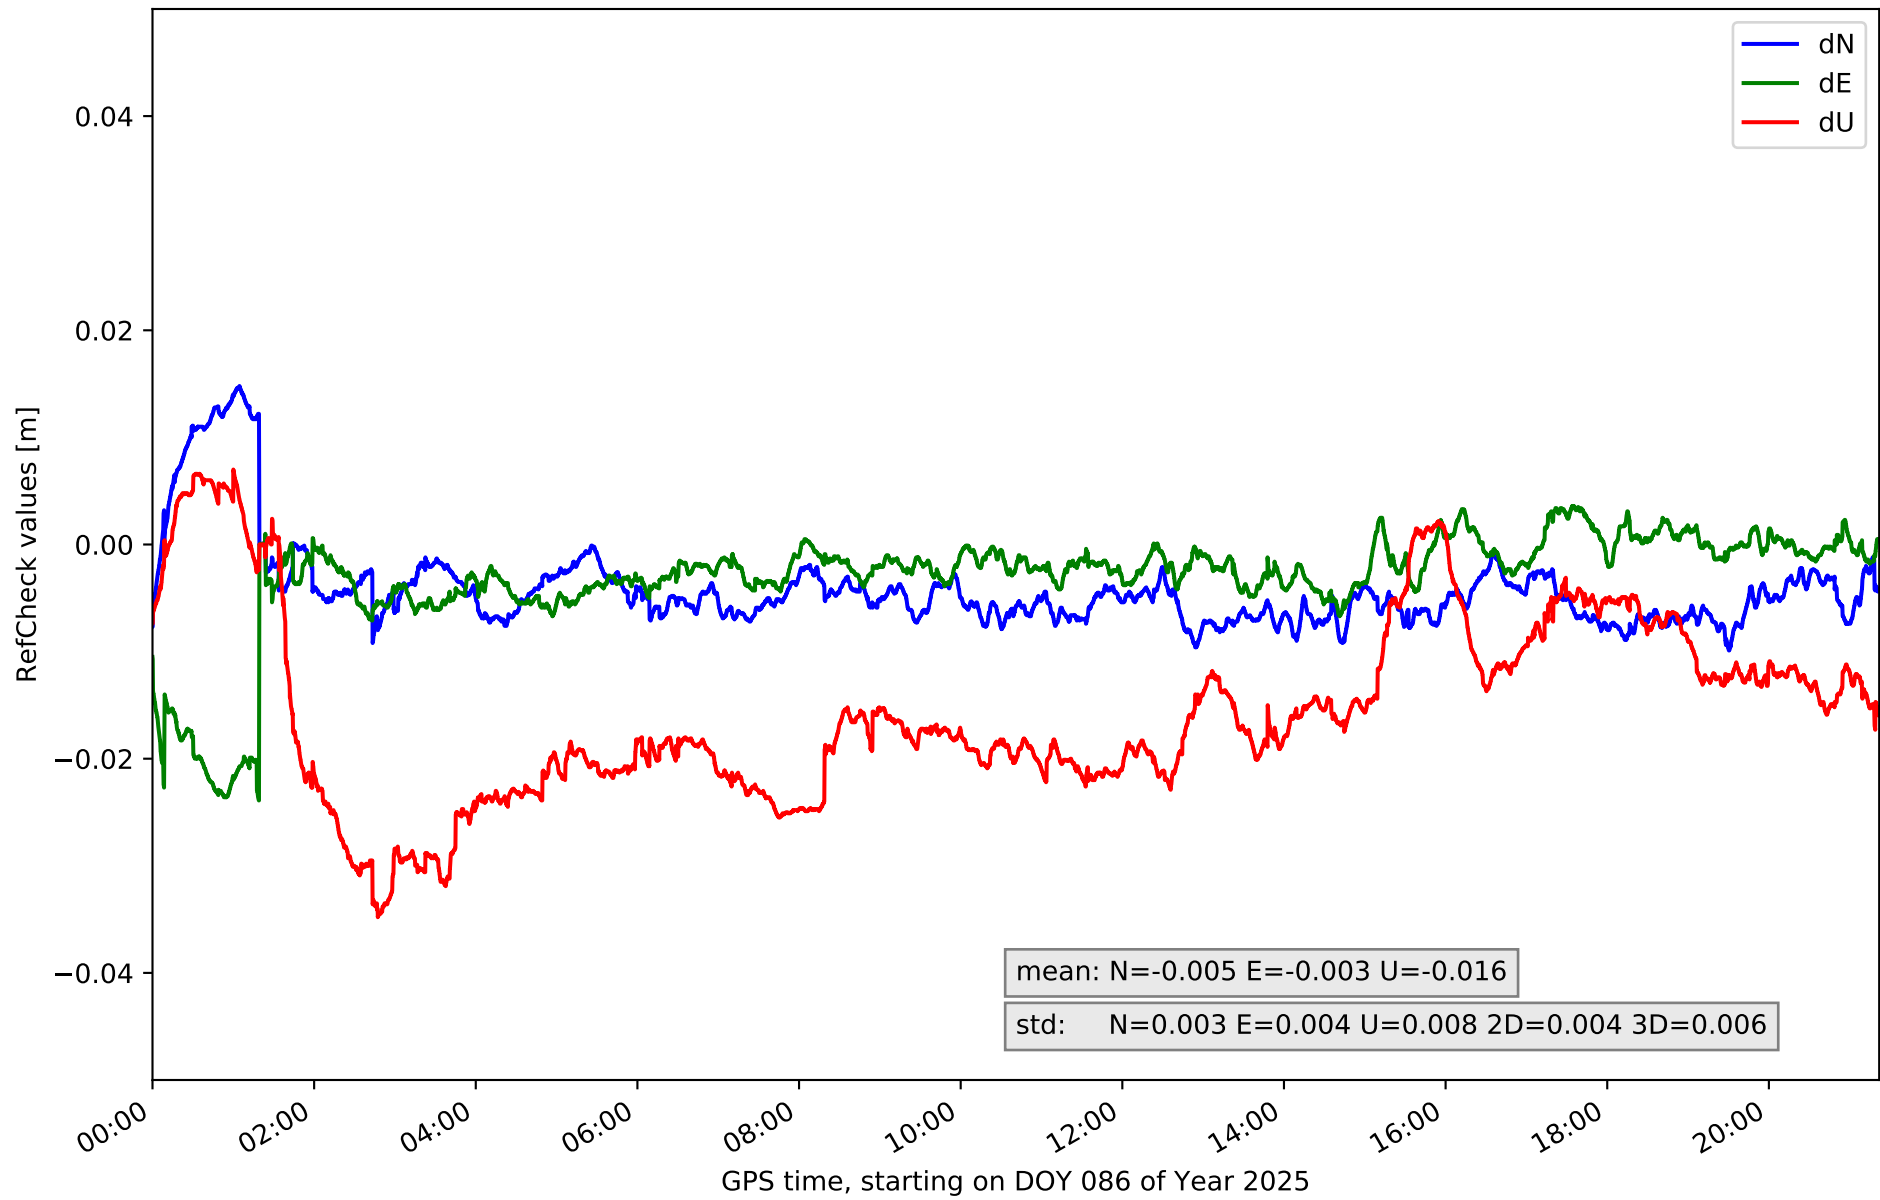

RefCheck for station TN09 in network N32T

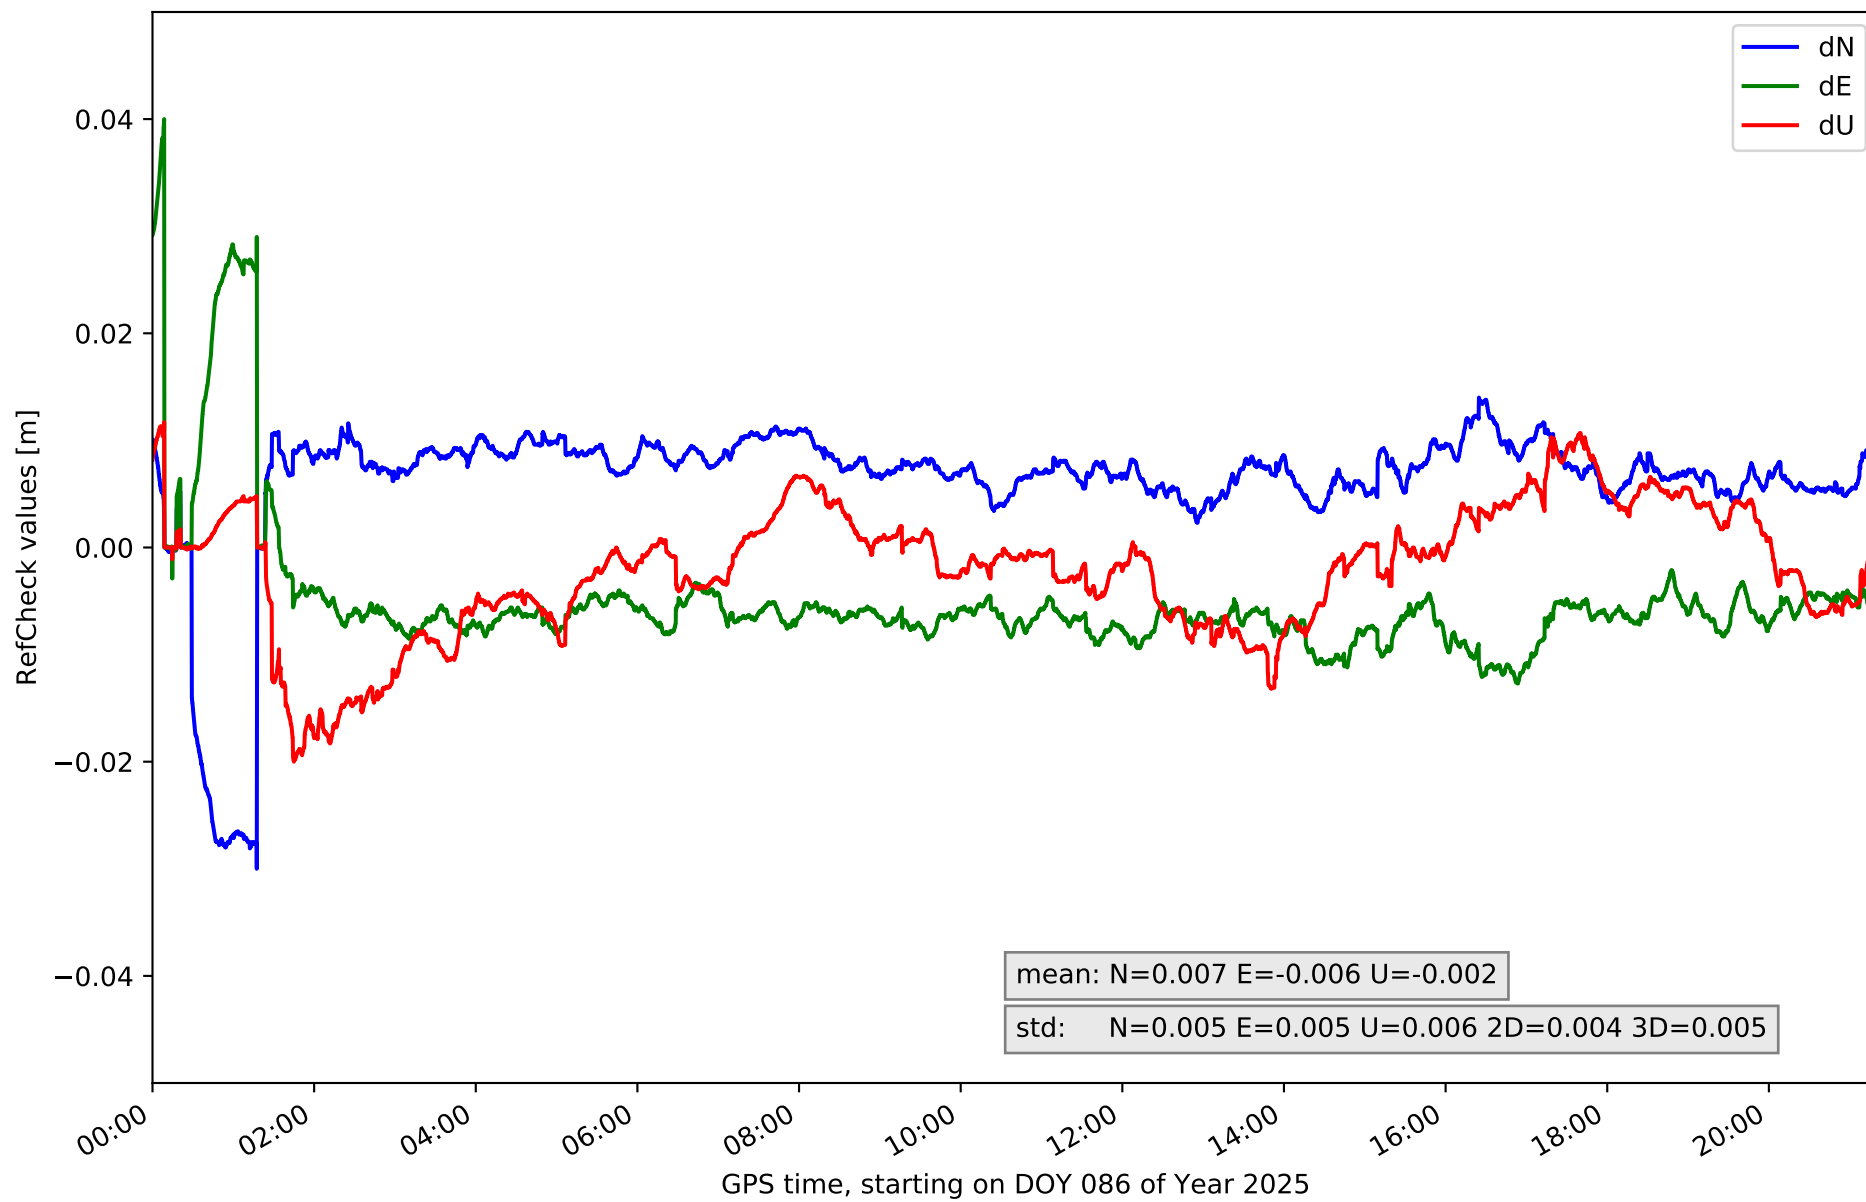

RefCheck for station TE11 in network N32T

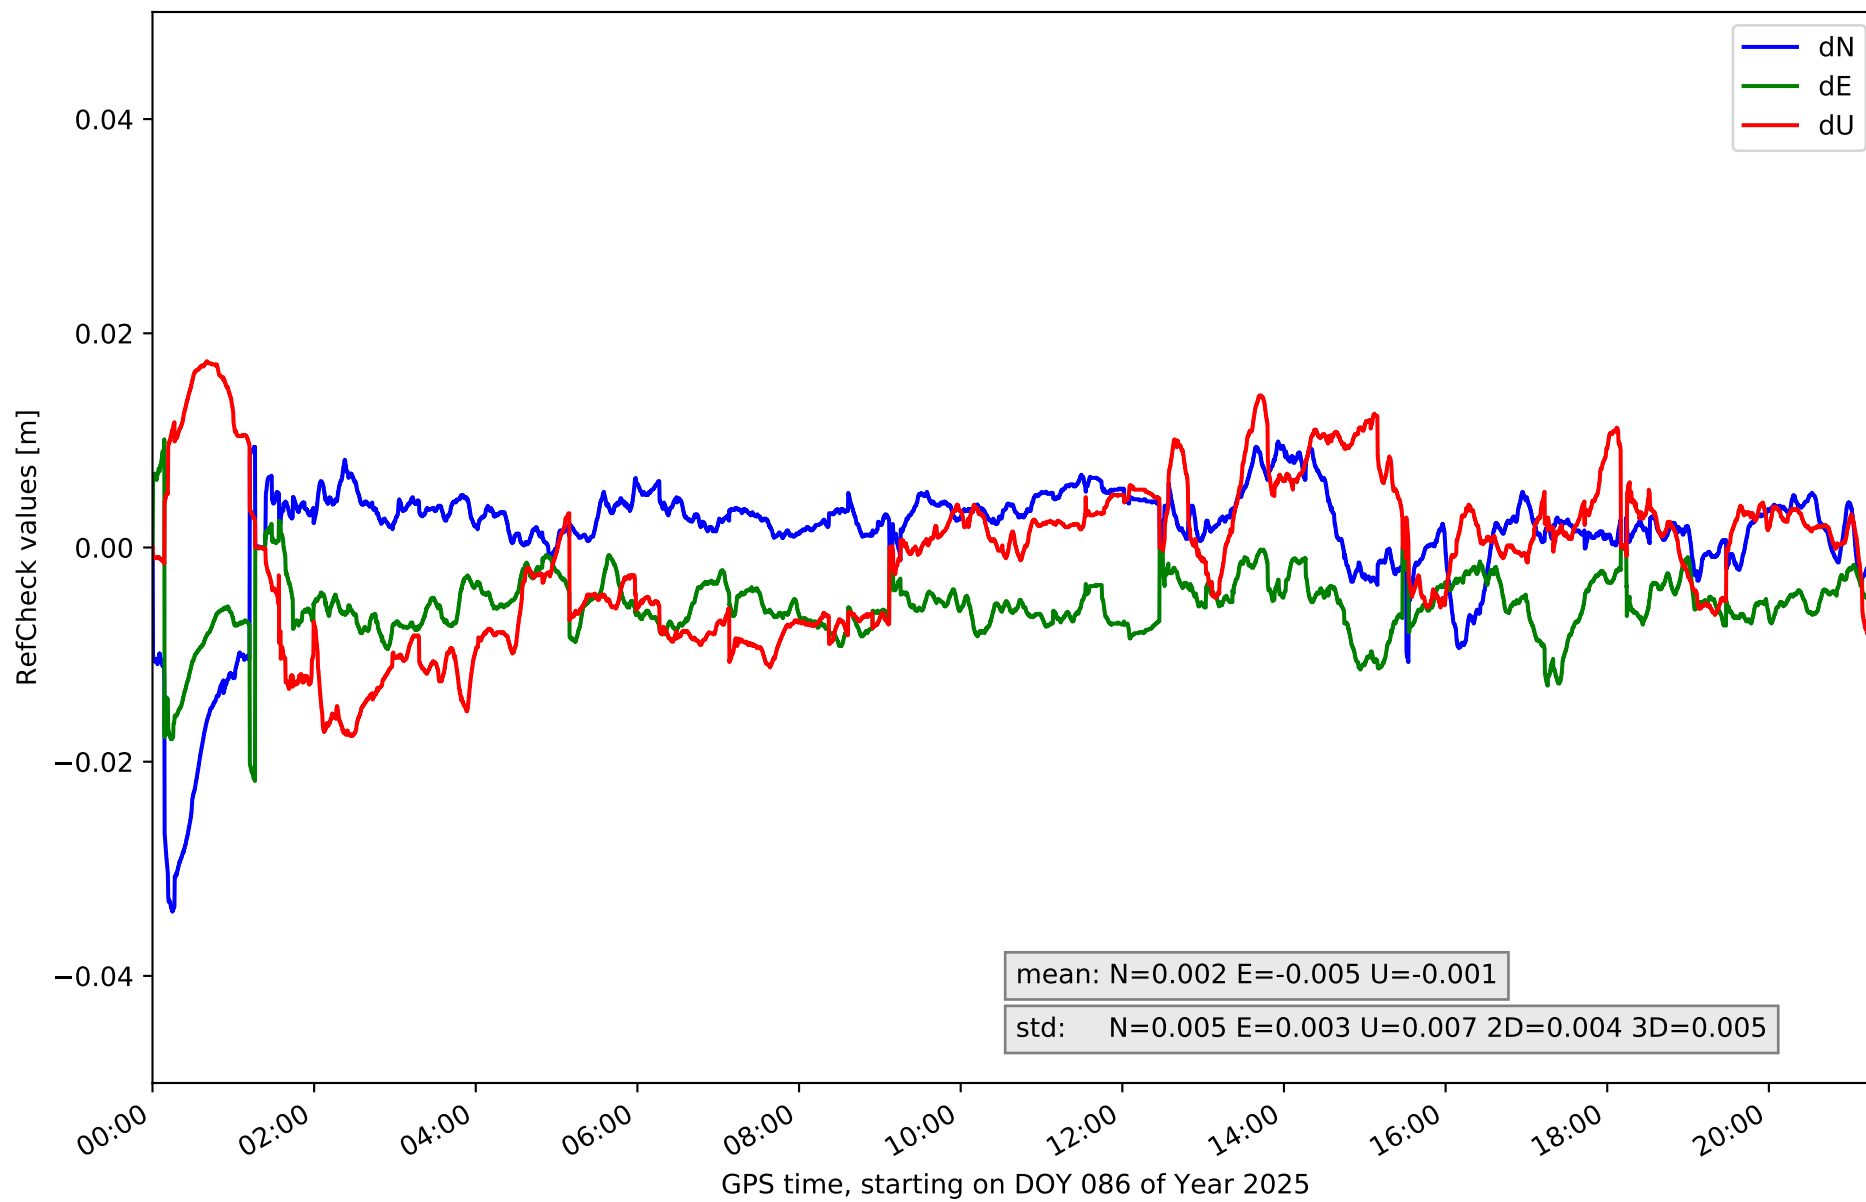

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.005	0.019	0.004	-0.013	0.02	0.005	-0.045	0.02	0.013	0.004	0.007	23785	73.8	6403	19.9
EH02	-0.004	0.018	0.004	-0.018	0.017	0.007	-0.051	0.049	0.018	0.004	0.01	21450	66.6	11156	34.6
GOM1	-0.022	0.028	0.004	-0.016	0.025	0.005	-0.028	0.083	0.017	0.003	0.013	7710	23.9	5665	17.6
IZAN	-0.008	0.025	0.004	-0.027	0.004	0.003	-0.02	0.041	0.01	0.004	0.007	1057	3.3	1978	6.1
LP01	-0.019	0.001	0.003	-0.018	0.014	0.004	-0.019	0.023	0.01	0.004	0.005	14366	44.6	6043	18.8
LP03	-0.007	0.009	0.003	-0.02	0.011	0.004	-0.022	0.029	0.011	0.003	0.006	1257	3.9	3672	11.4
LPAL	-0.014	0.001	0.002	-0.015	0.015	0.004	-0.017	0.013	0.007	0.003	0.003	16778	52.1	111	0.3
LRES	-0.015	0.017	0.003	-0.018	0.019	0.005	-0.031	0.02	0.009	0.003	0.005	23492	72.9	6235	19.4
TN01	-0.005	0.007	0.002	-0.016	0.006	0.003	-0.025	0.007	0.008	0.003	0.005	15120	46.9	3349	10.4
TN02	-0.013	0.018	0.004	-0.015	0.019	0.005	-0.02	0.037	0.009	0.003	0.007	7267	22.6	11344	35.2
TN03	-0.029	0.016	0.005	-0.025	0.029	0.007	-0.017	0.052	0.015	0.006	0.012	4420	13.7	5386	16.7
TN04	-0.021	0.008	0.003	-0.01	0.019	0.003	-0.023	0.003	0.004	0.002	0.003	1888	5.9	464	1.4
TN06	-0.01	0.015	0.003	-0.024	0.004	0.004	-0.035	0.007	0.008	0.004	0.006	1482	4.6	14270	44.3
TN09	-0.03	0.014	0.005	-0.013	0.04	0.005	-0.02	0.012	0.006	0.004	0.005	16939	52.6	1076	3.3
TE11	-0.034	0.01	0.005	-0.022	0.01	0.003	-0.018	0.017	0.007	0.004	0.005	2516	7.8	952	3.0
Mean	-0.016	0.014	0.004	-0.018	0.017	0.004	-0.026	0.028	0.01	0.004	0.007	10635.1	33.0	5206.9	16.2
Min/Max	-0.034	0.028	0.005	-0.027	0.04	0.007	-0.051	0.083	0.018	0.006	0.013	23785	73.8	14270	44.3

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	88.5	89.0	83.2	90.0	89.8
considering satellites with dual-frequency fixed	83.2	86.3	66.9	87.0	88.0
considering all signals separately	83.9	86.7	66.9	87.4	86.6