

summary for network N32T

timeperiod chosen: from 2025-03-28-00:00:00 until 2025-03-28-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 2.3 seconds


average fixing percentage with threshold set to 0.3: 85.9 percent

stations available: 14 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN04:	antenna: LEIAT504	LEIS	receiver: LEICA GR50	height: 1468.105
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.508
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

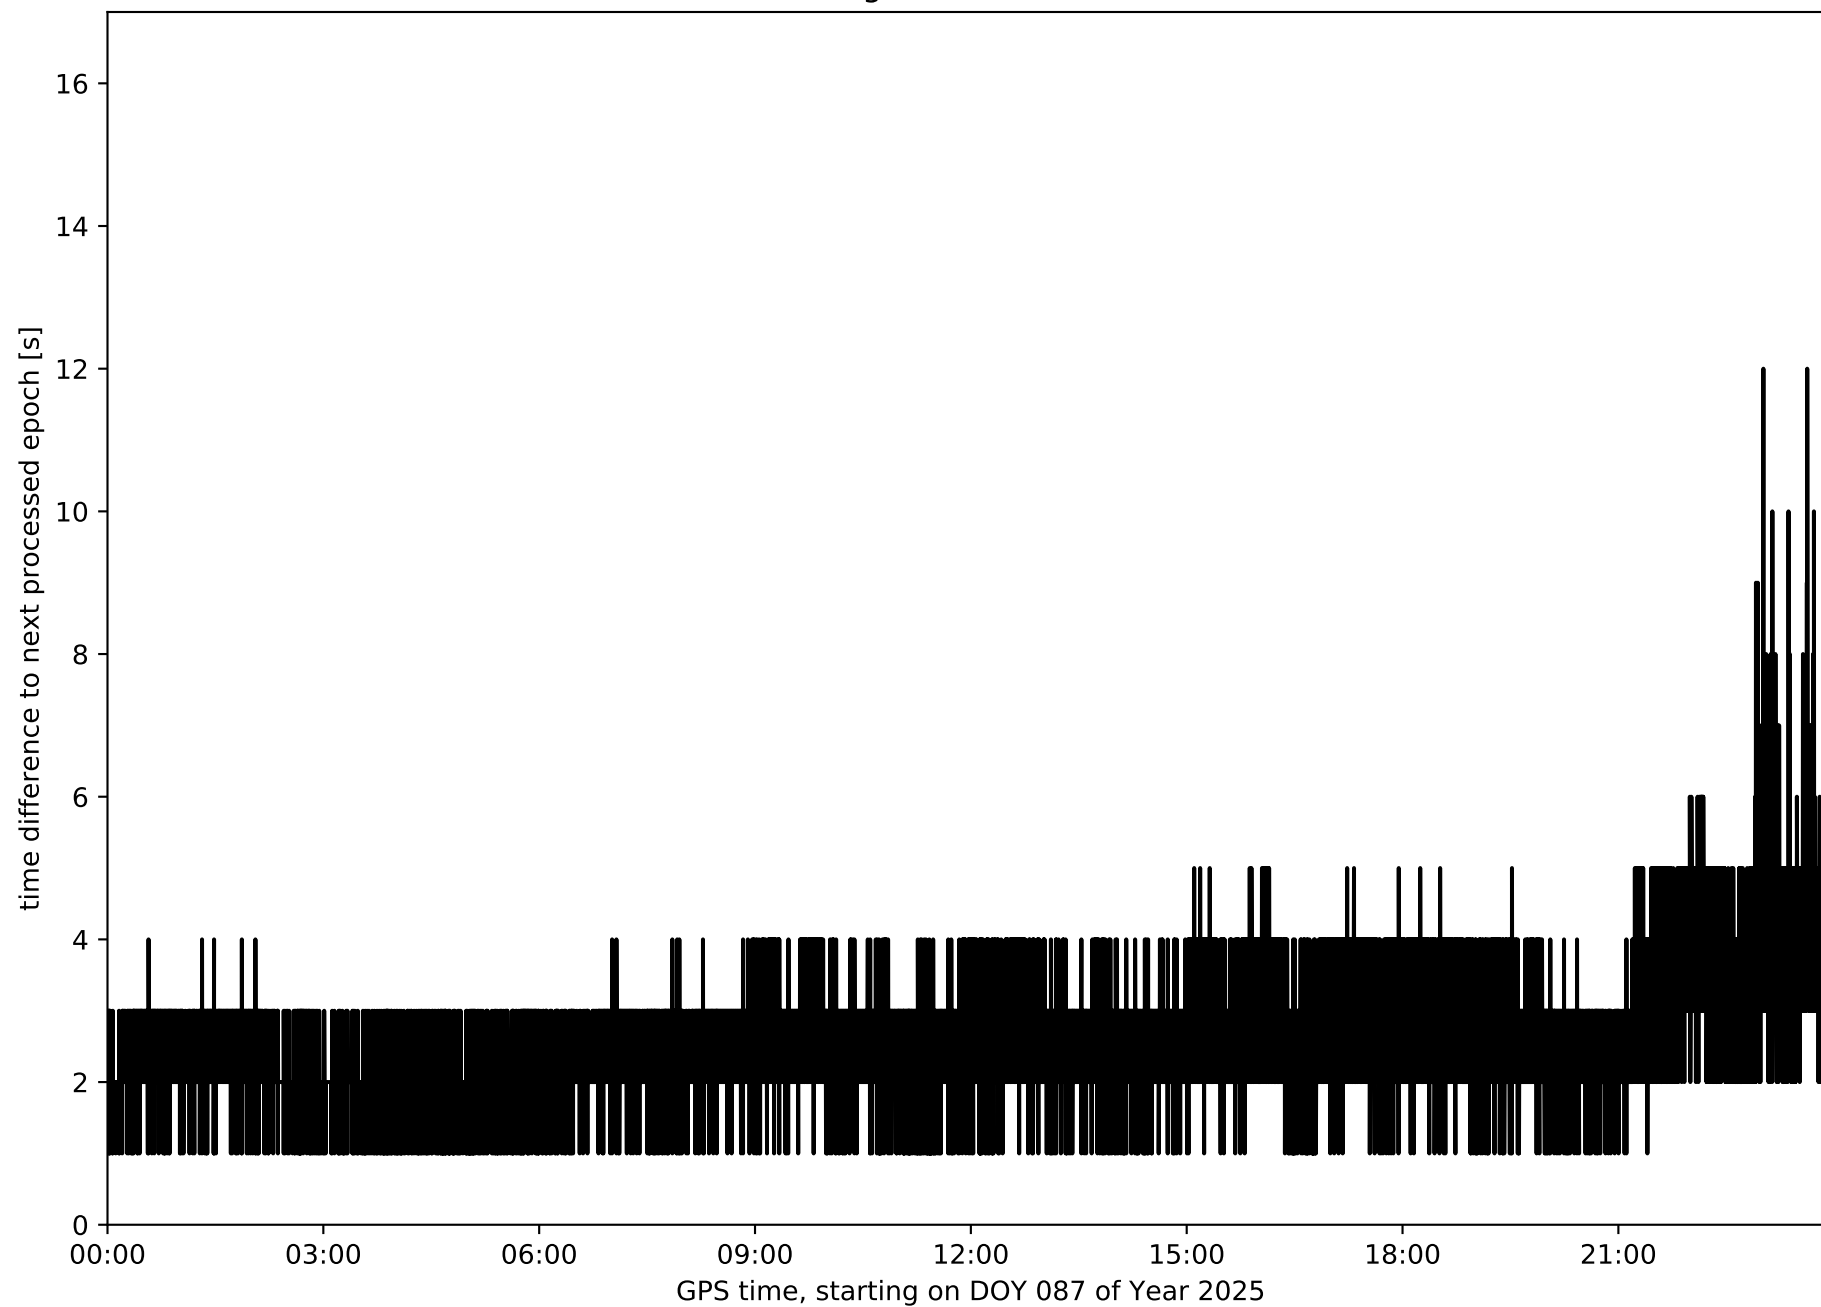


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

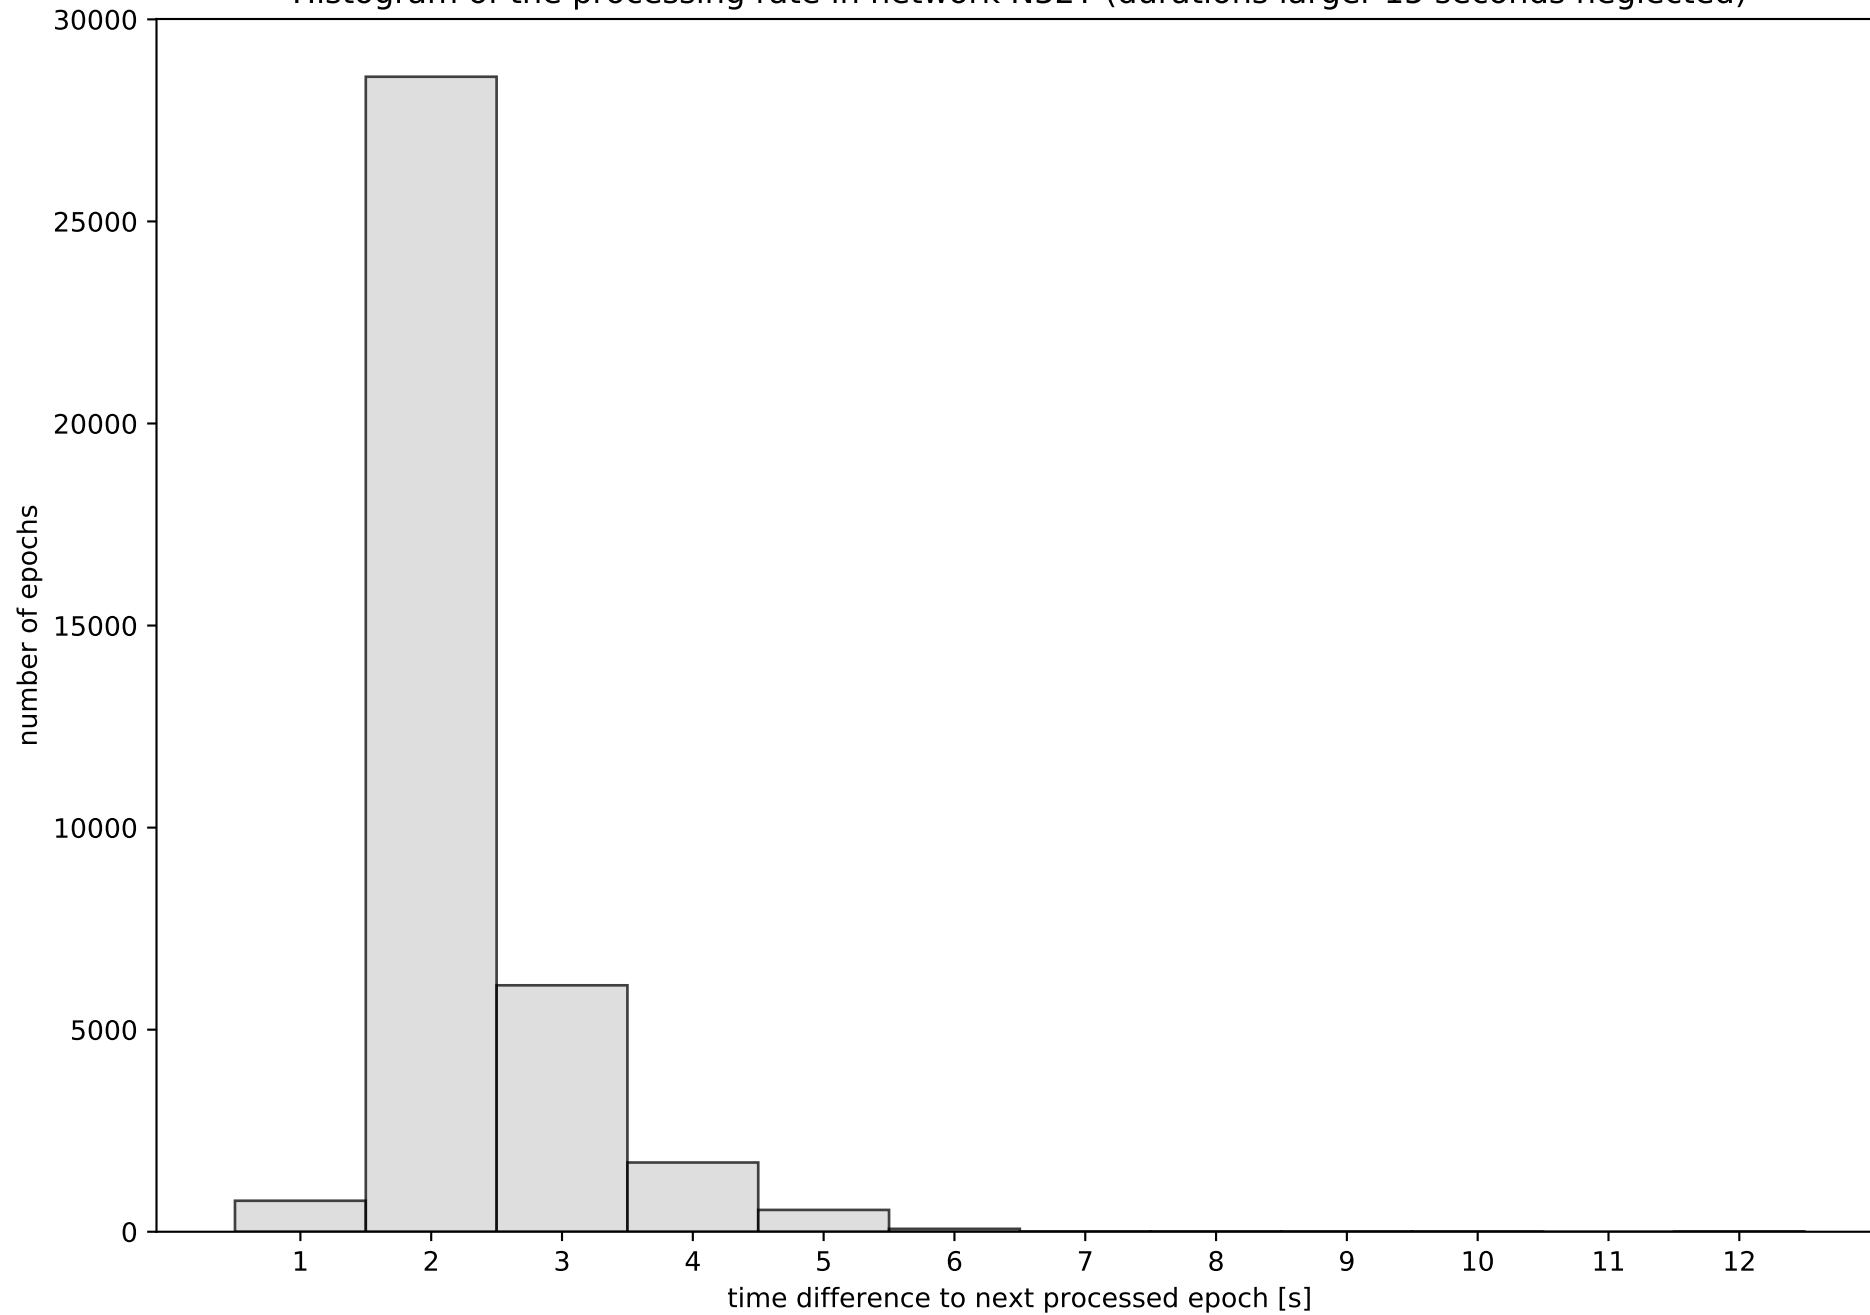


Network N32T with threshold set to 0.3

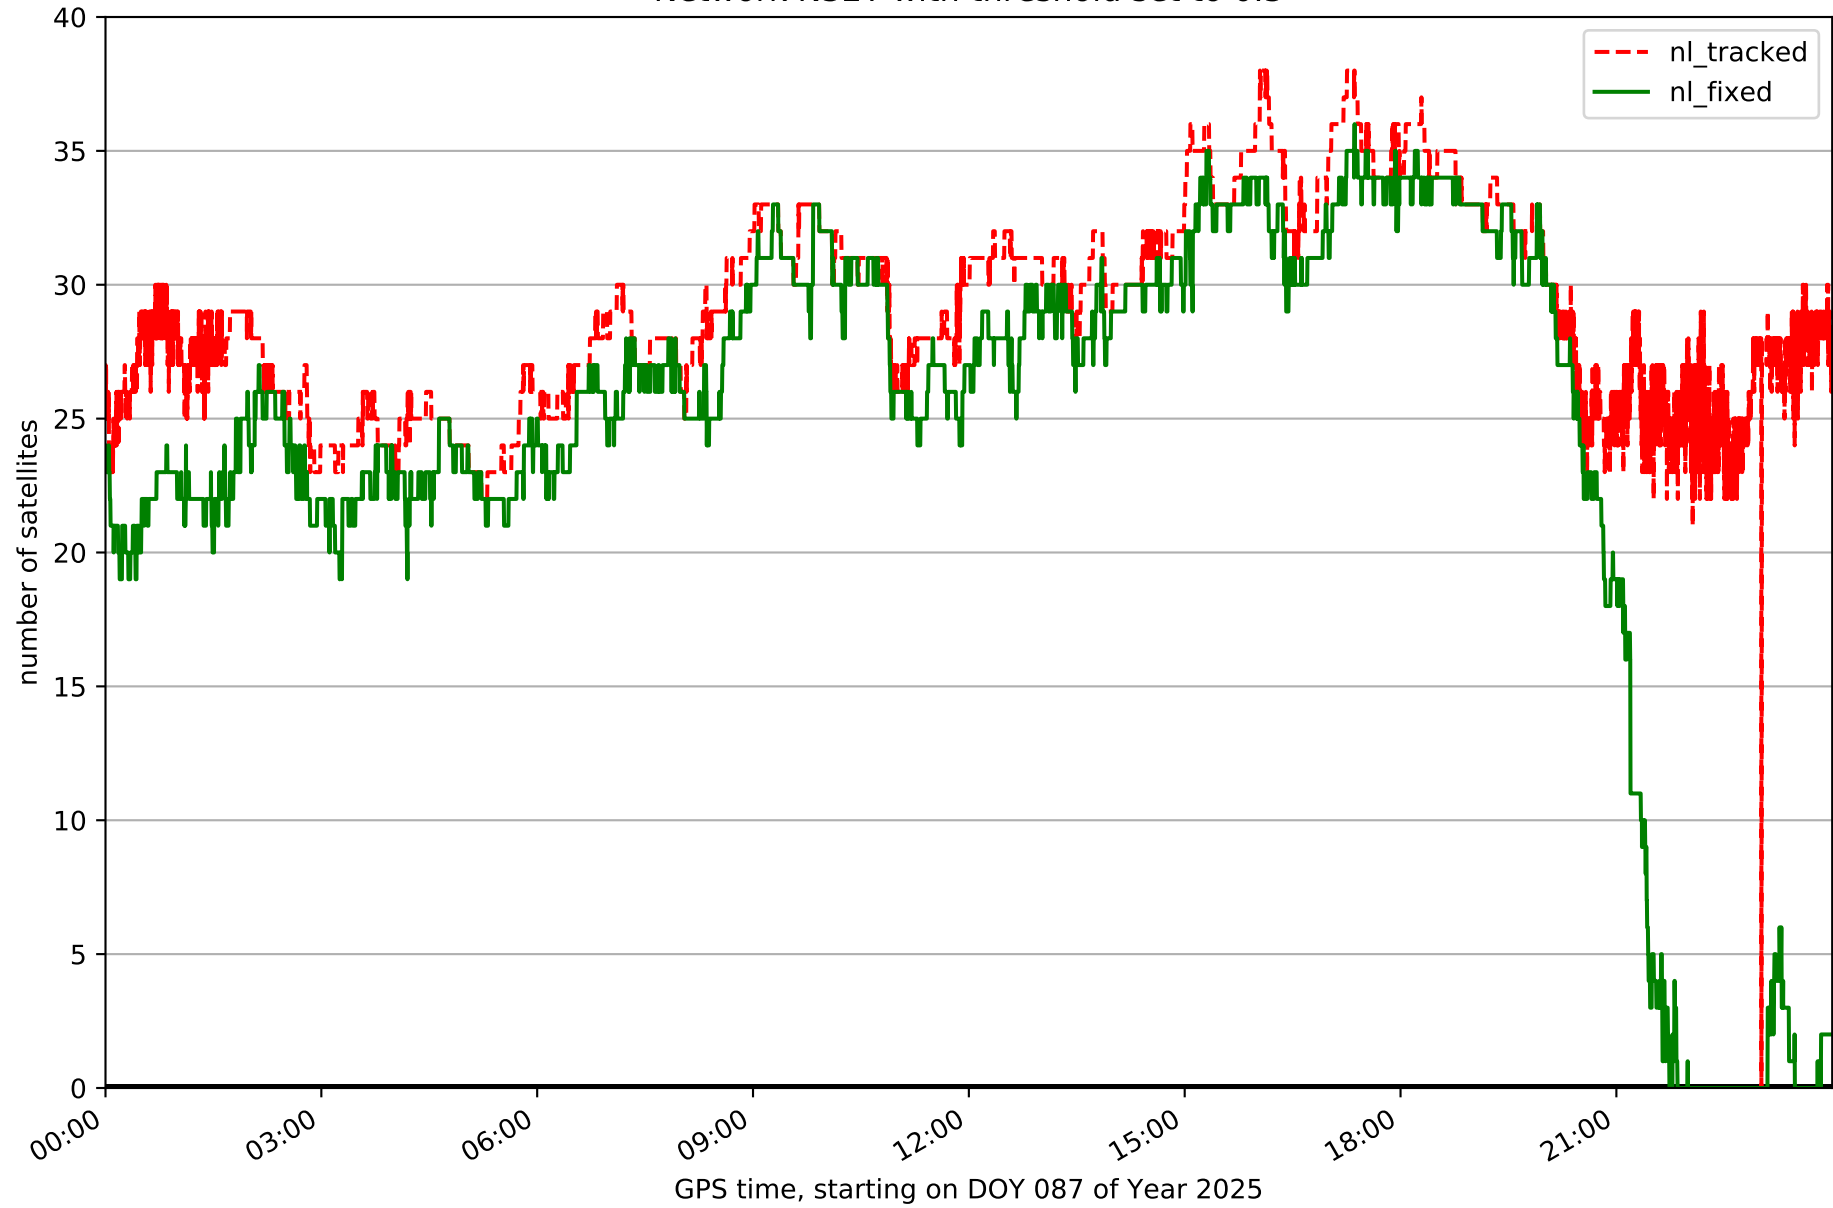


Fixing percentage of satellites in network N32T with threshold set to 0.3

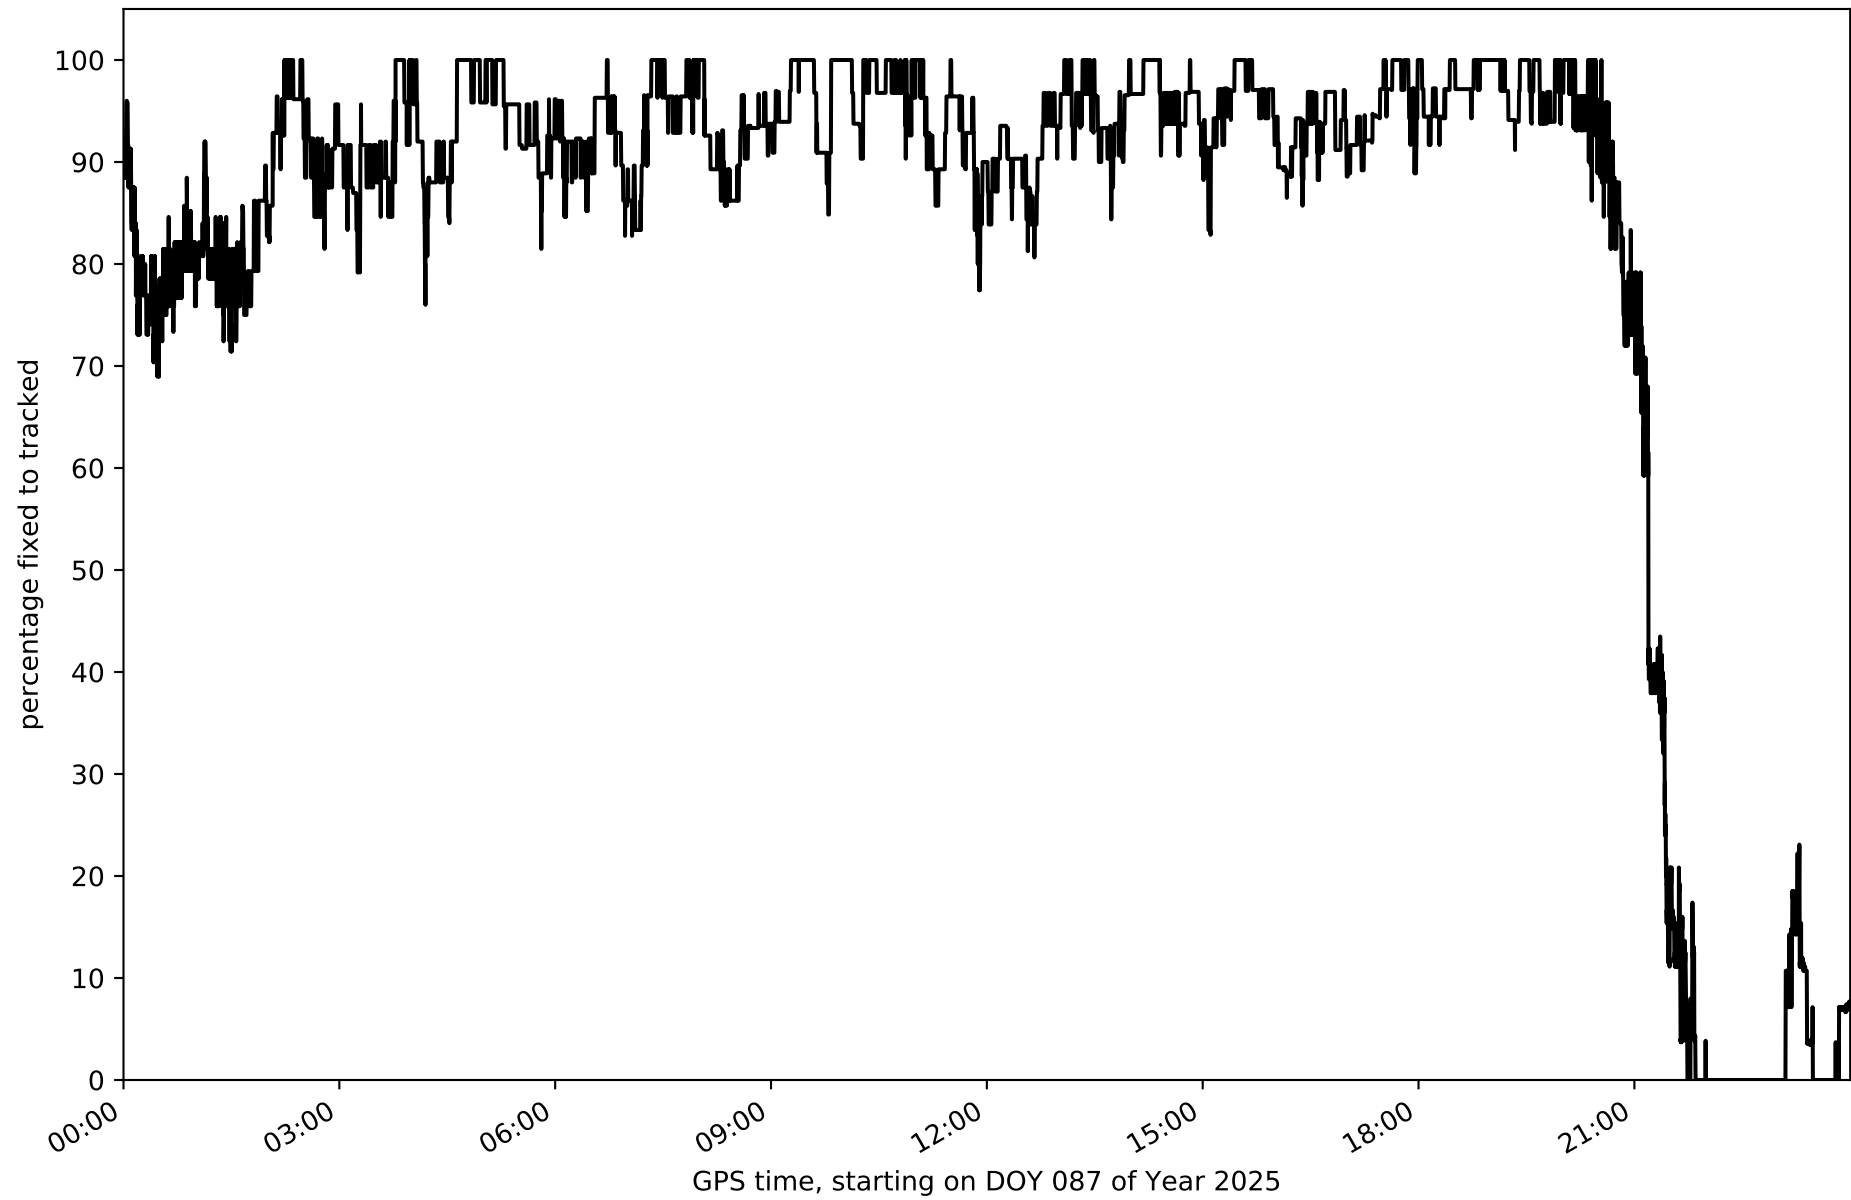


Network N32T - only GPS with threshold set to 0.3

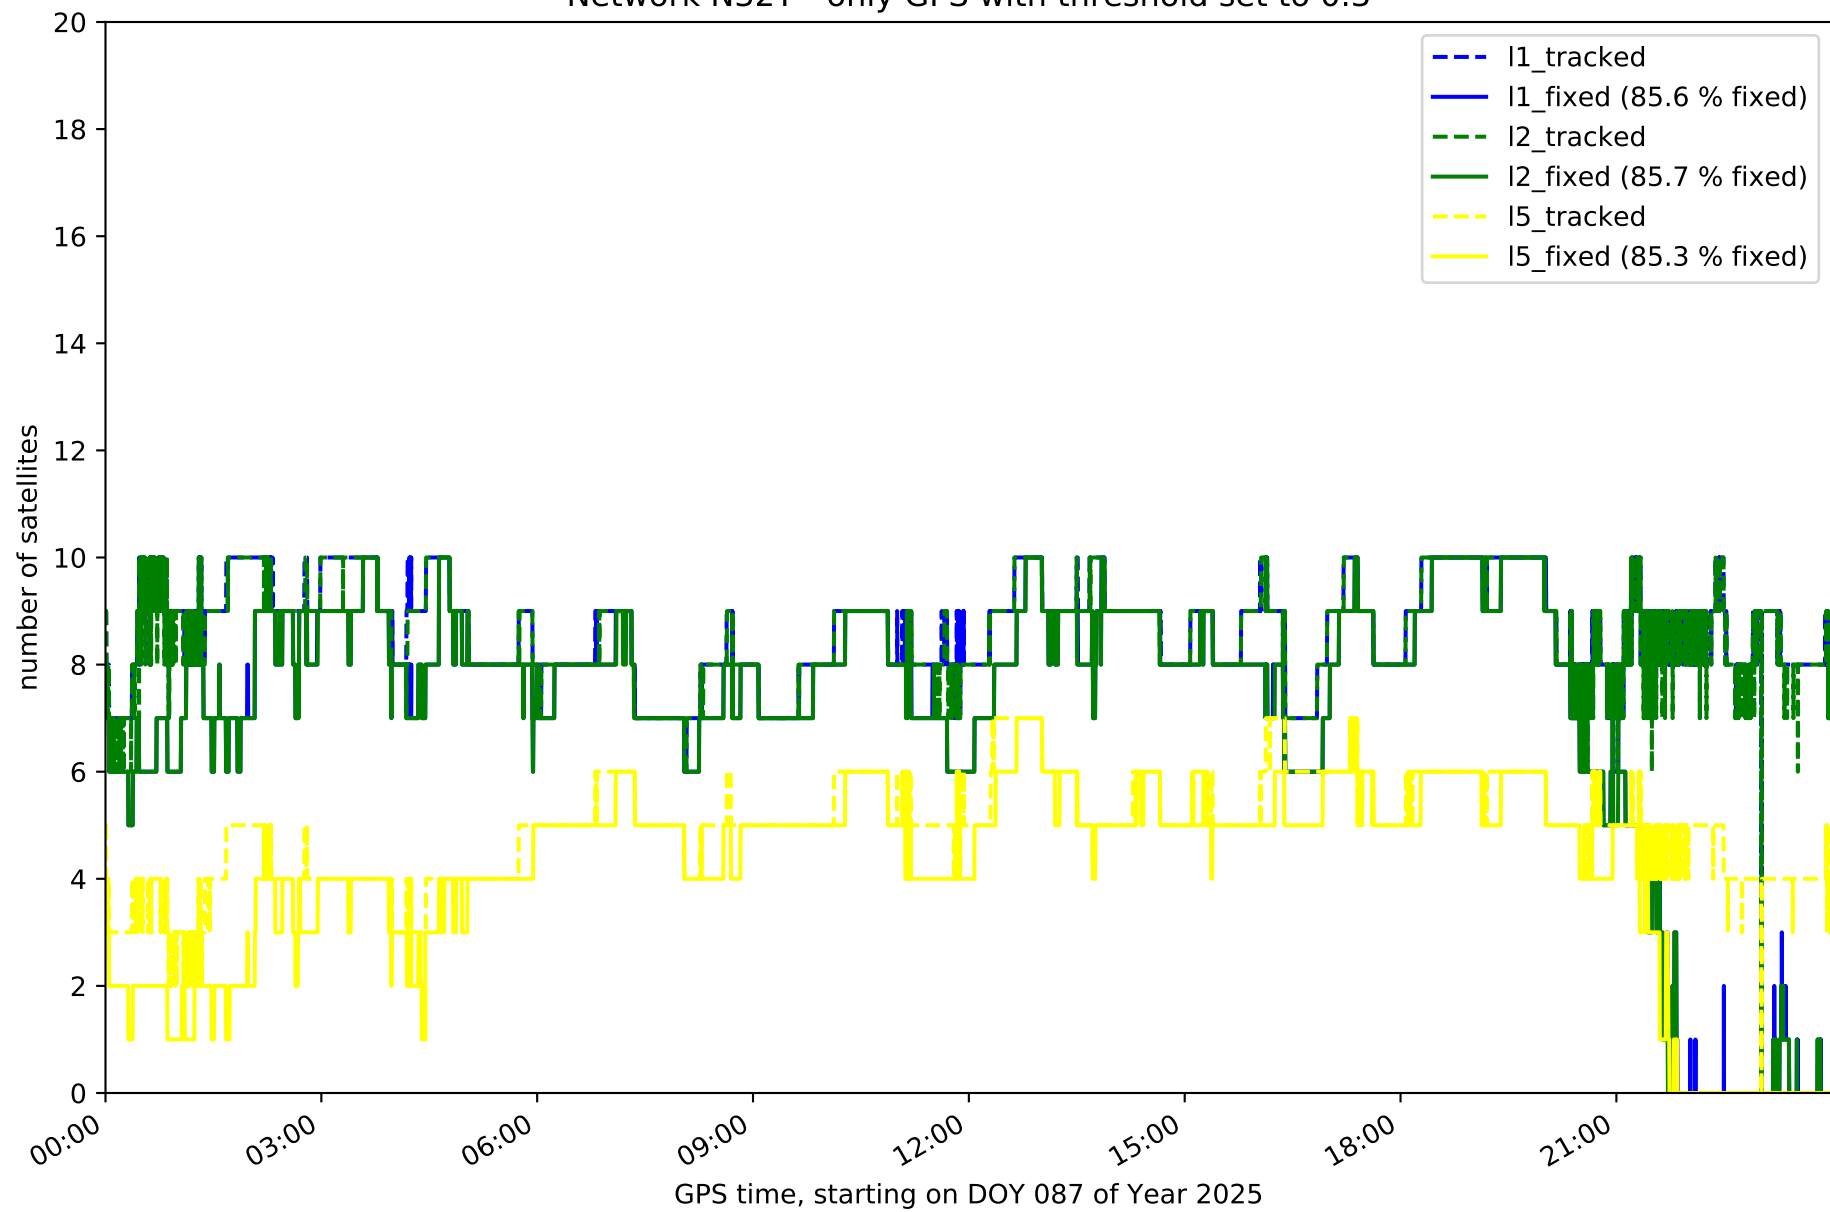


Network N32T - only GLONASS with threshold set to 0.3

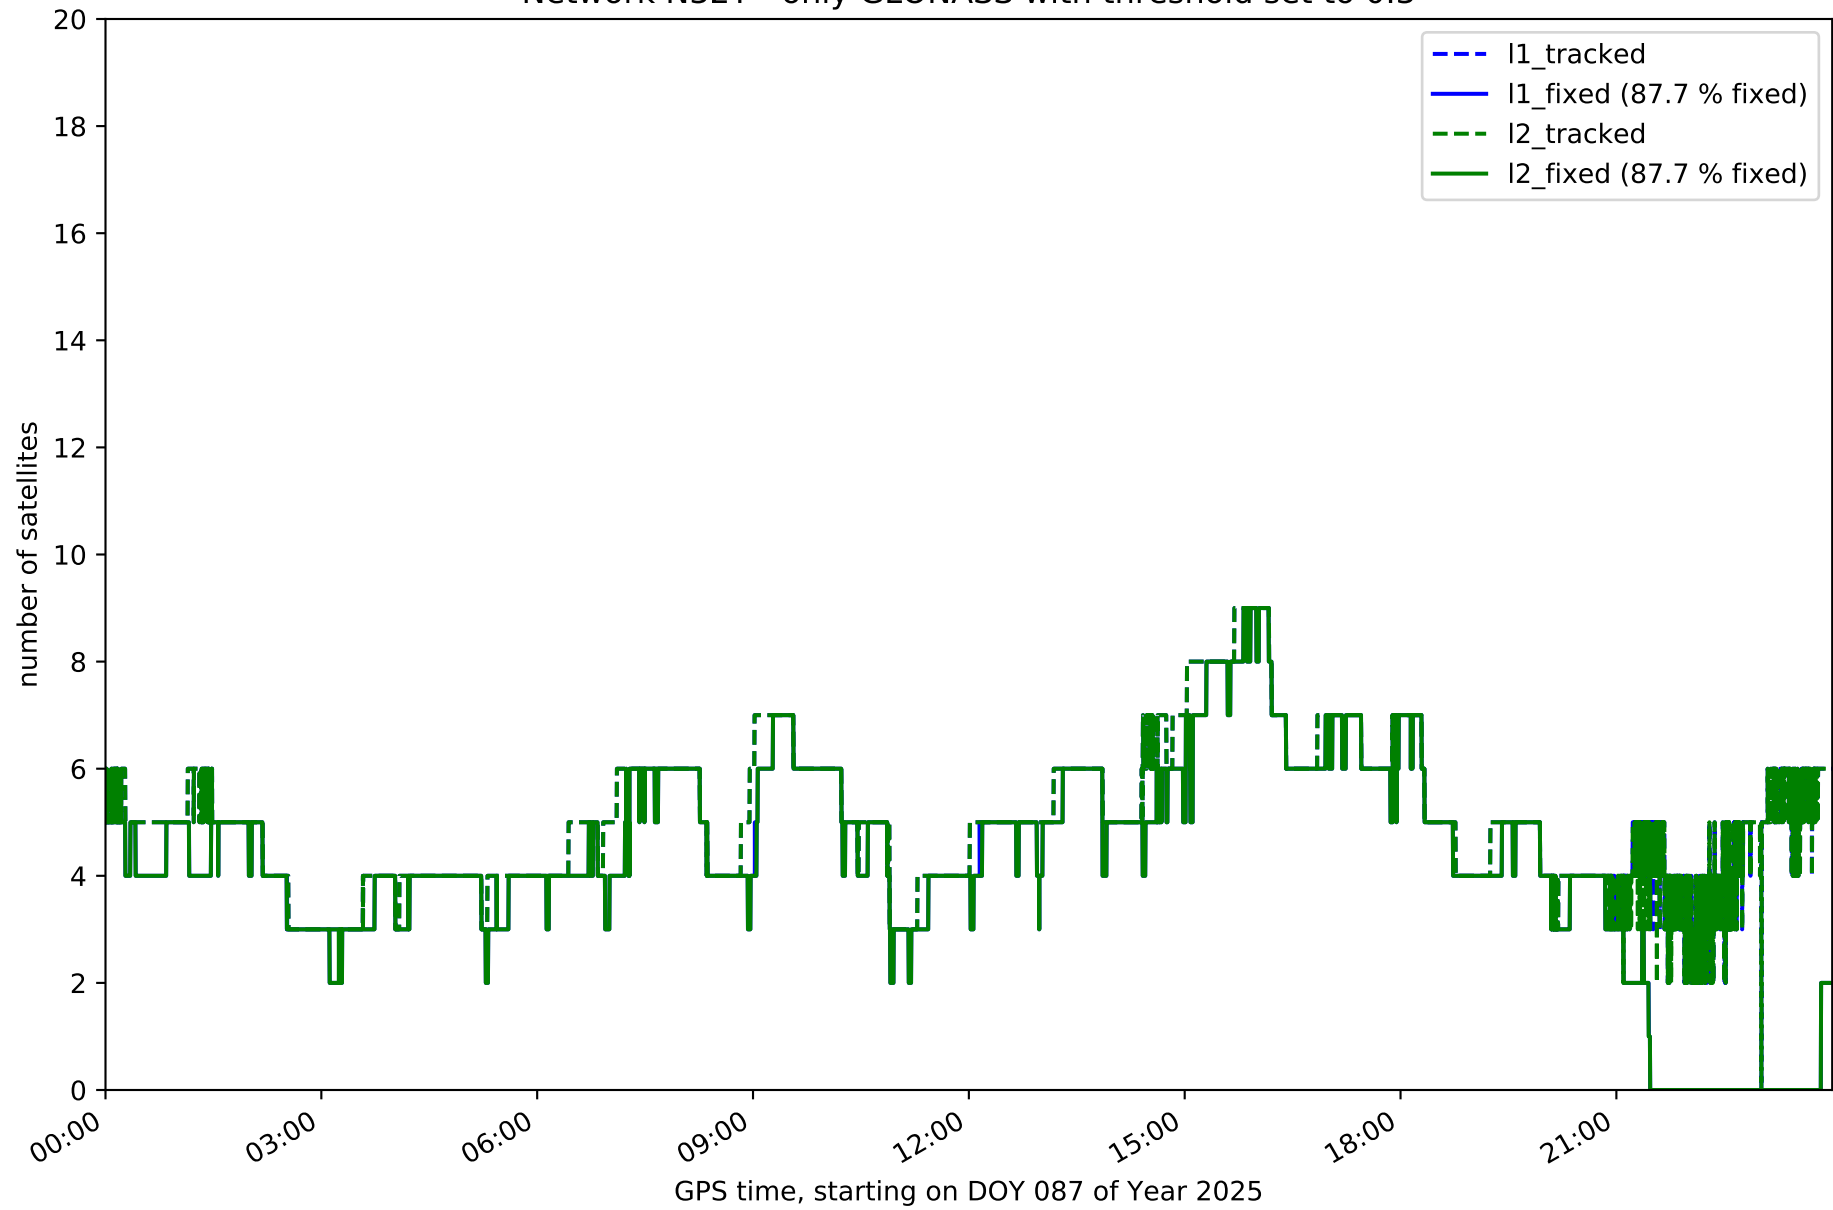


Network N32T - only BDS with threshold set to 0.3

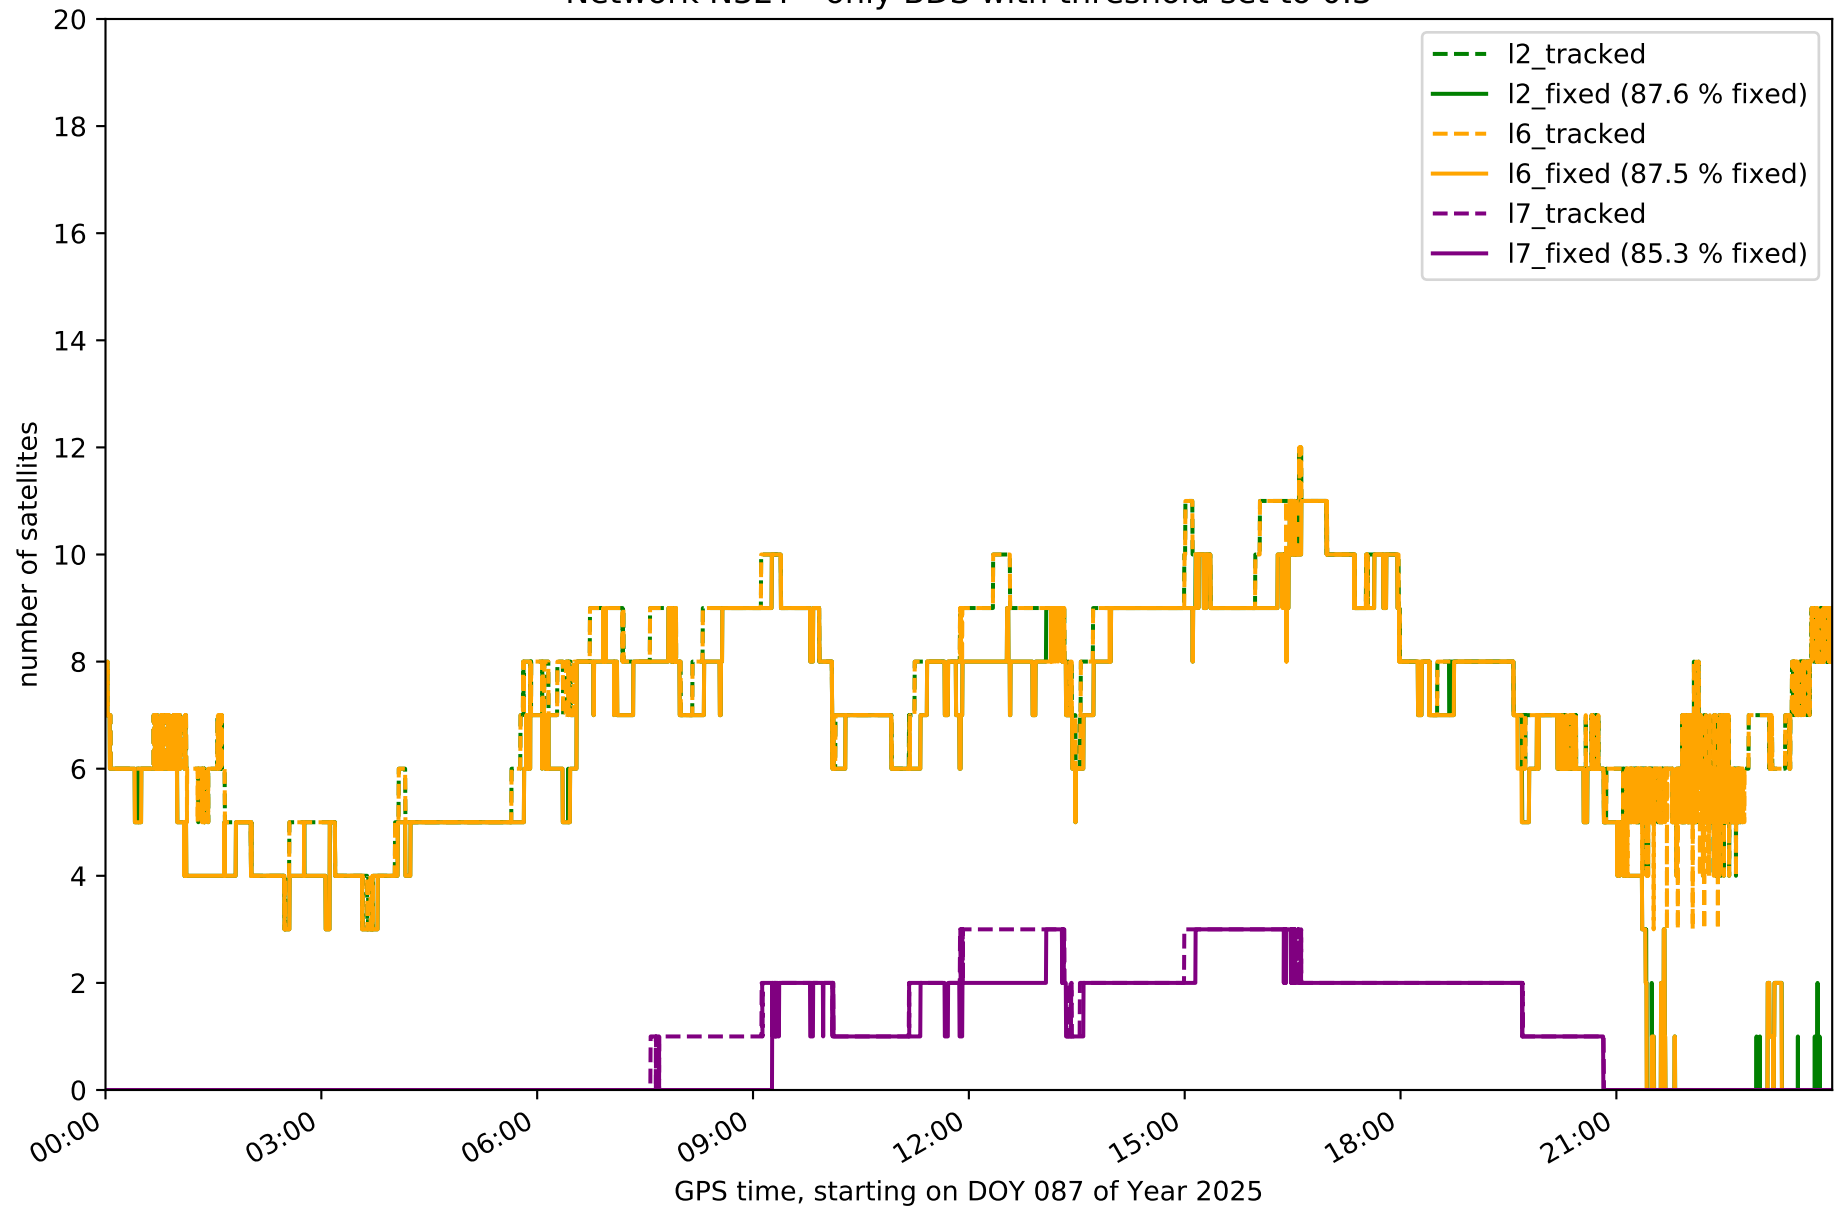


Network N32T - only Galileo with threshold set to 0.3

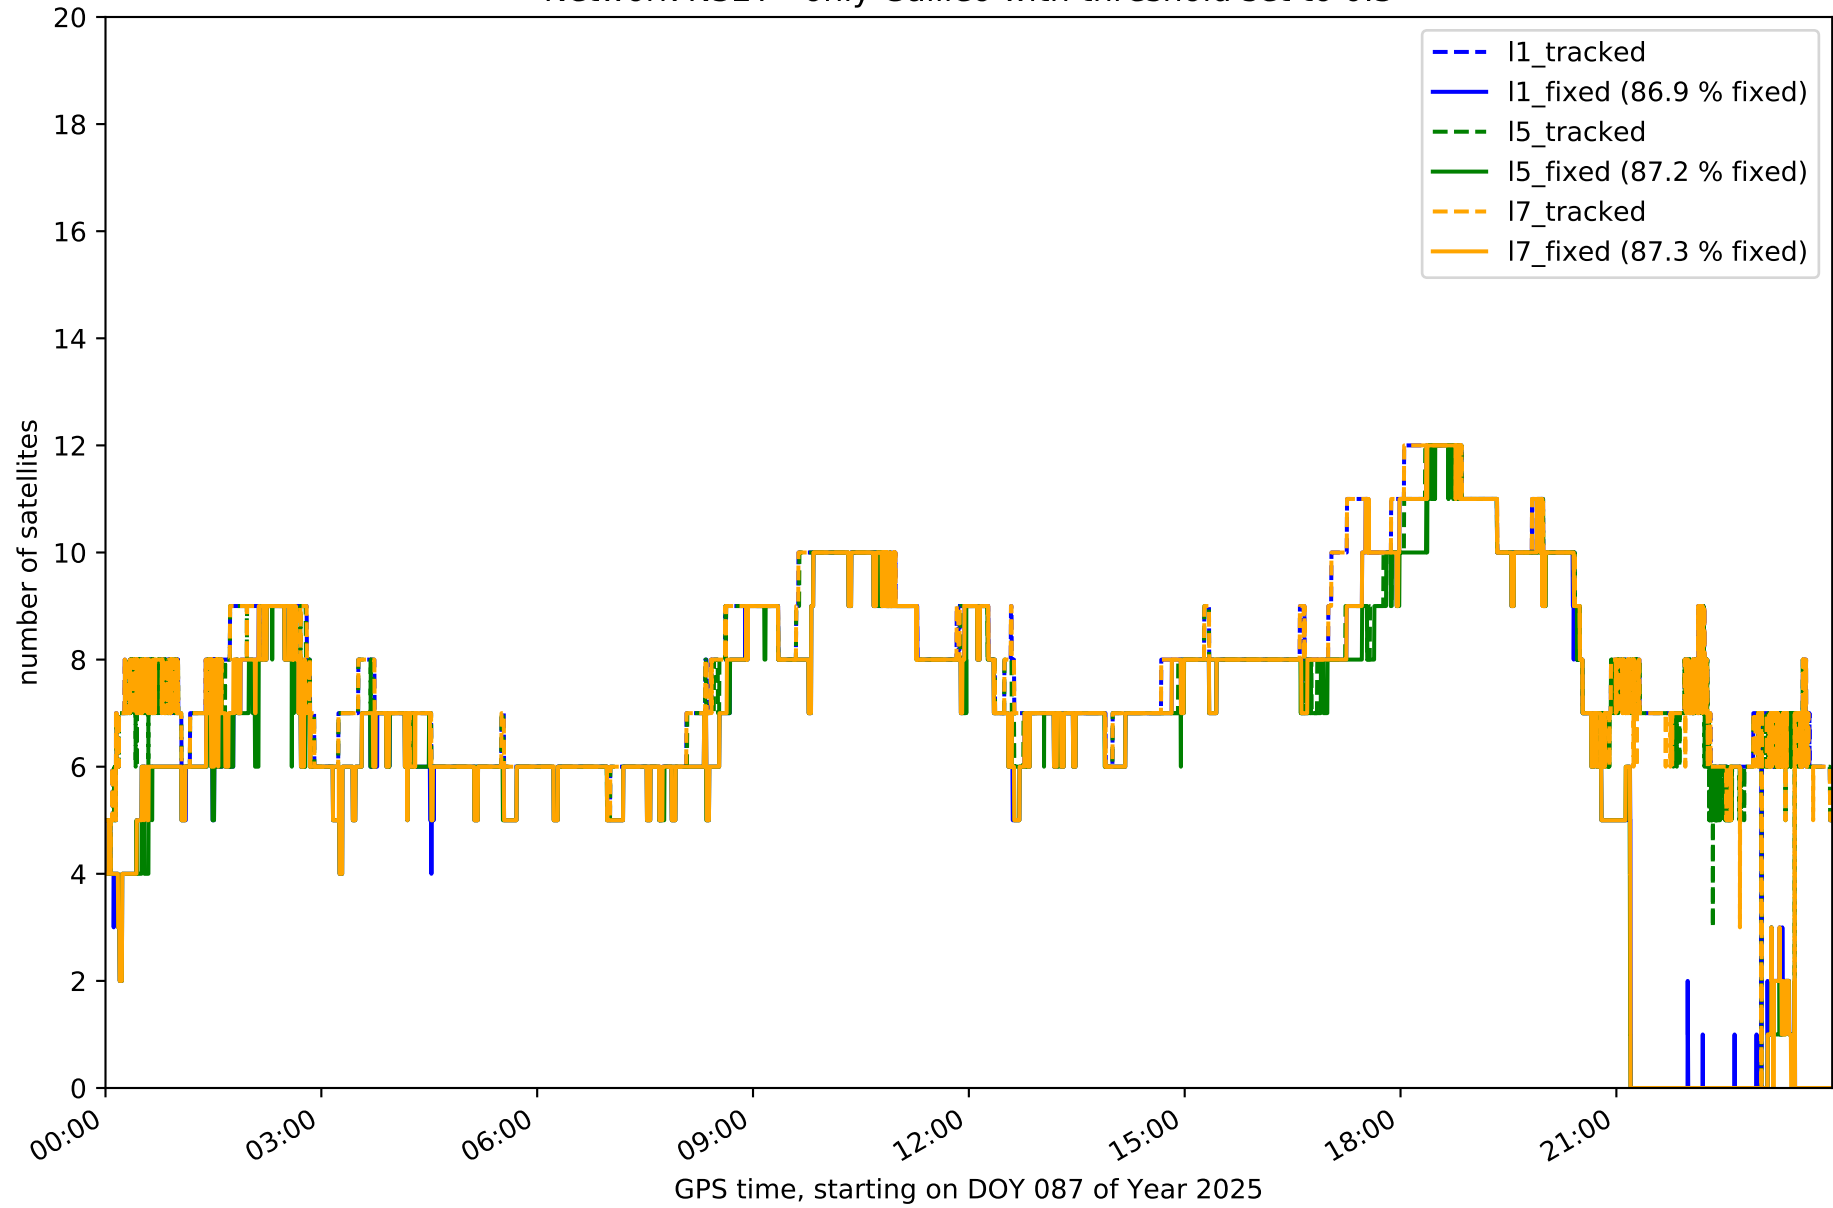


Station EH01 in network N32T

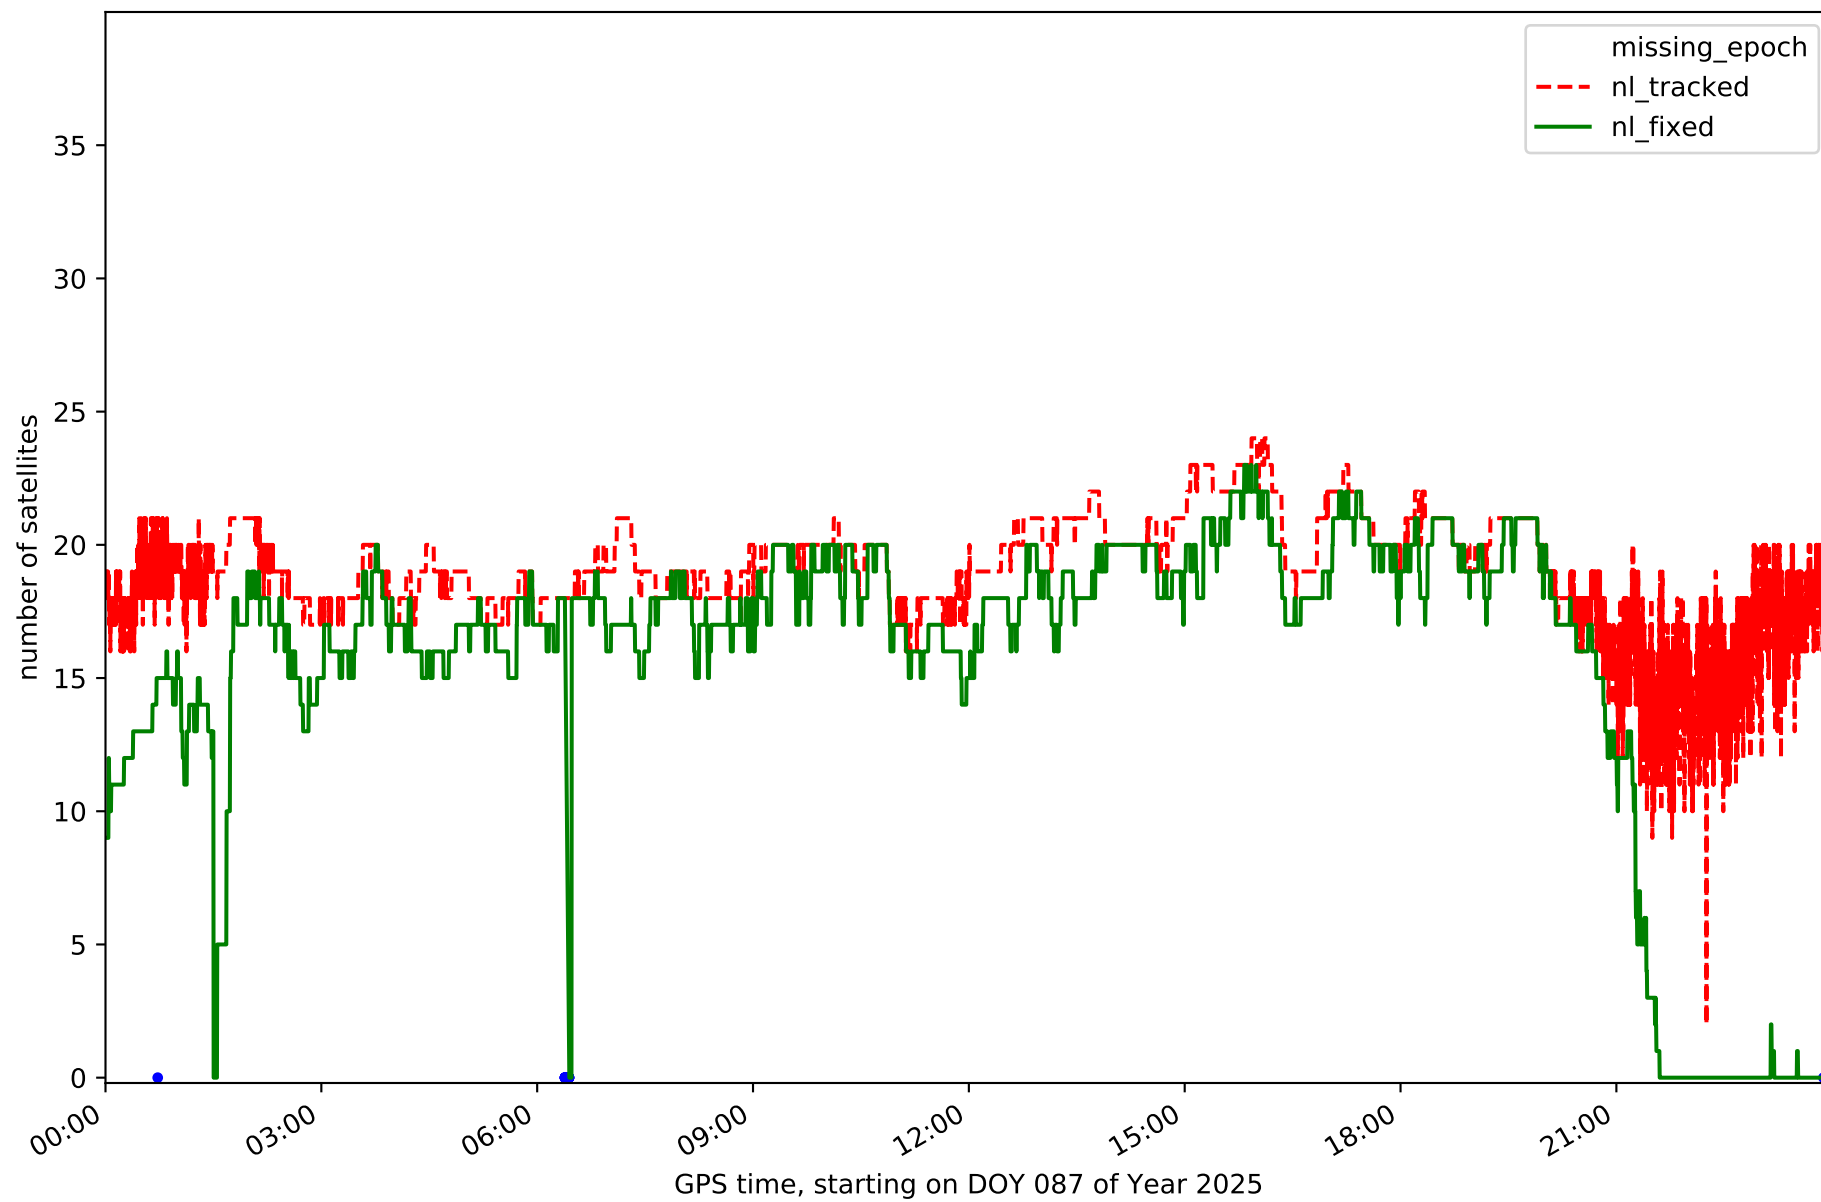


Station EH02 in network N32T

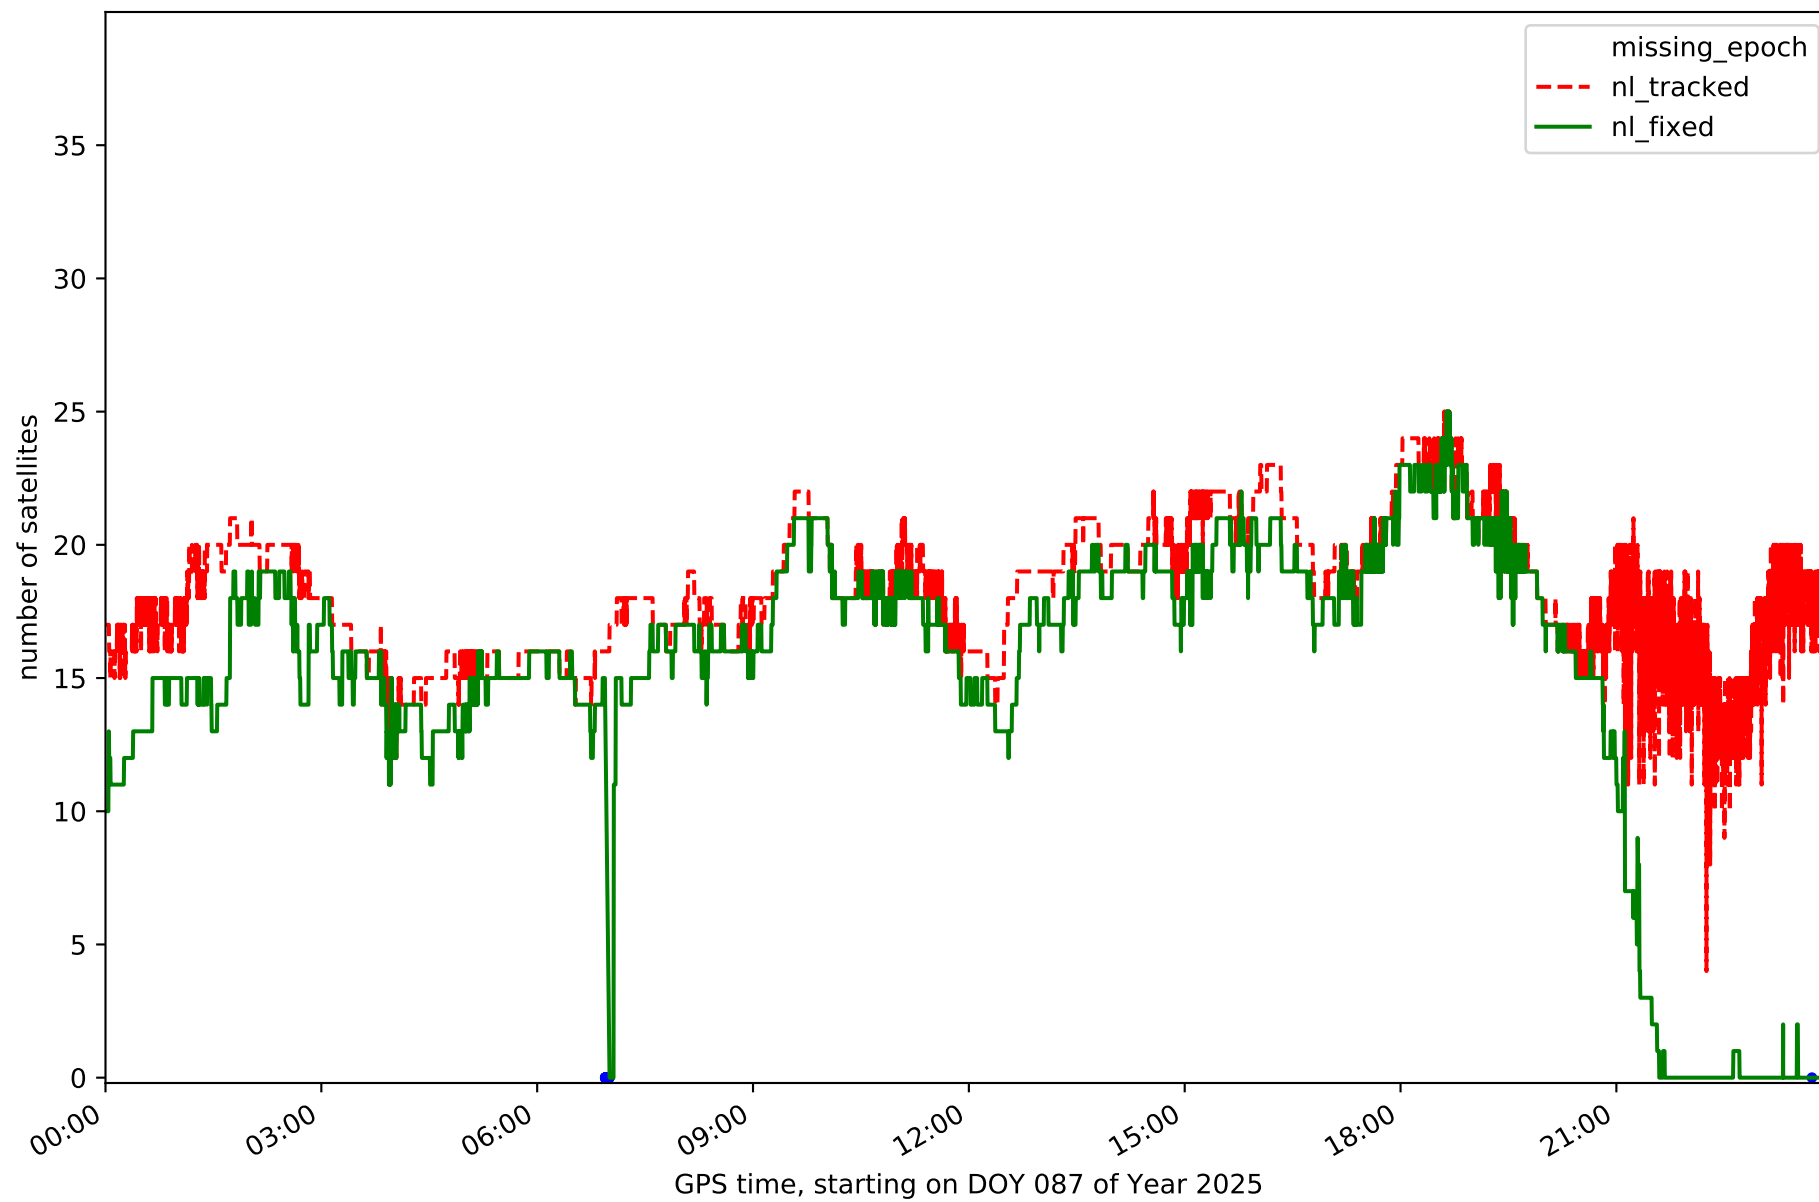


Station GOM1 in network N32T

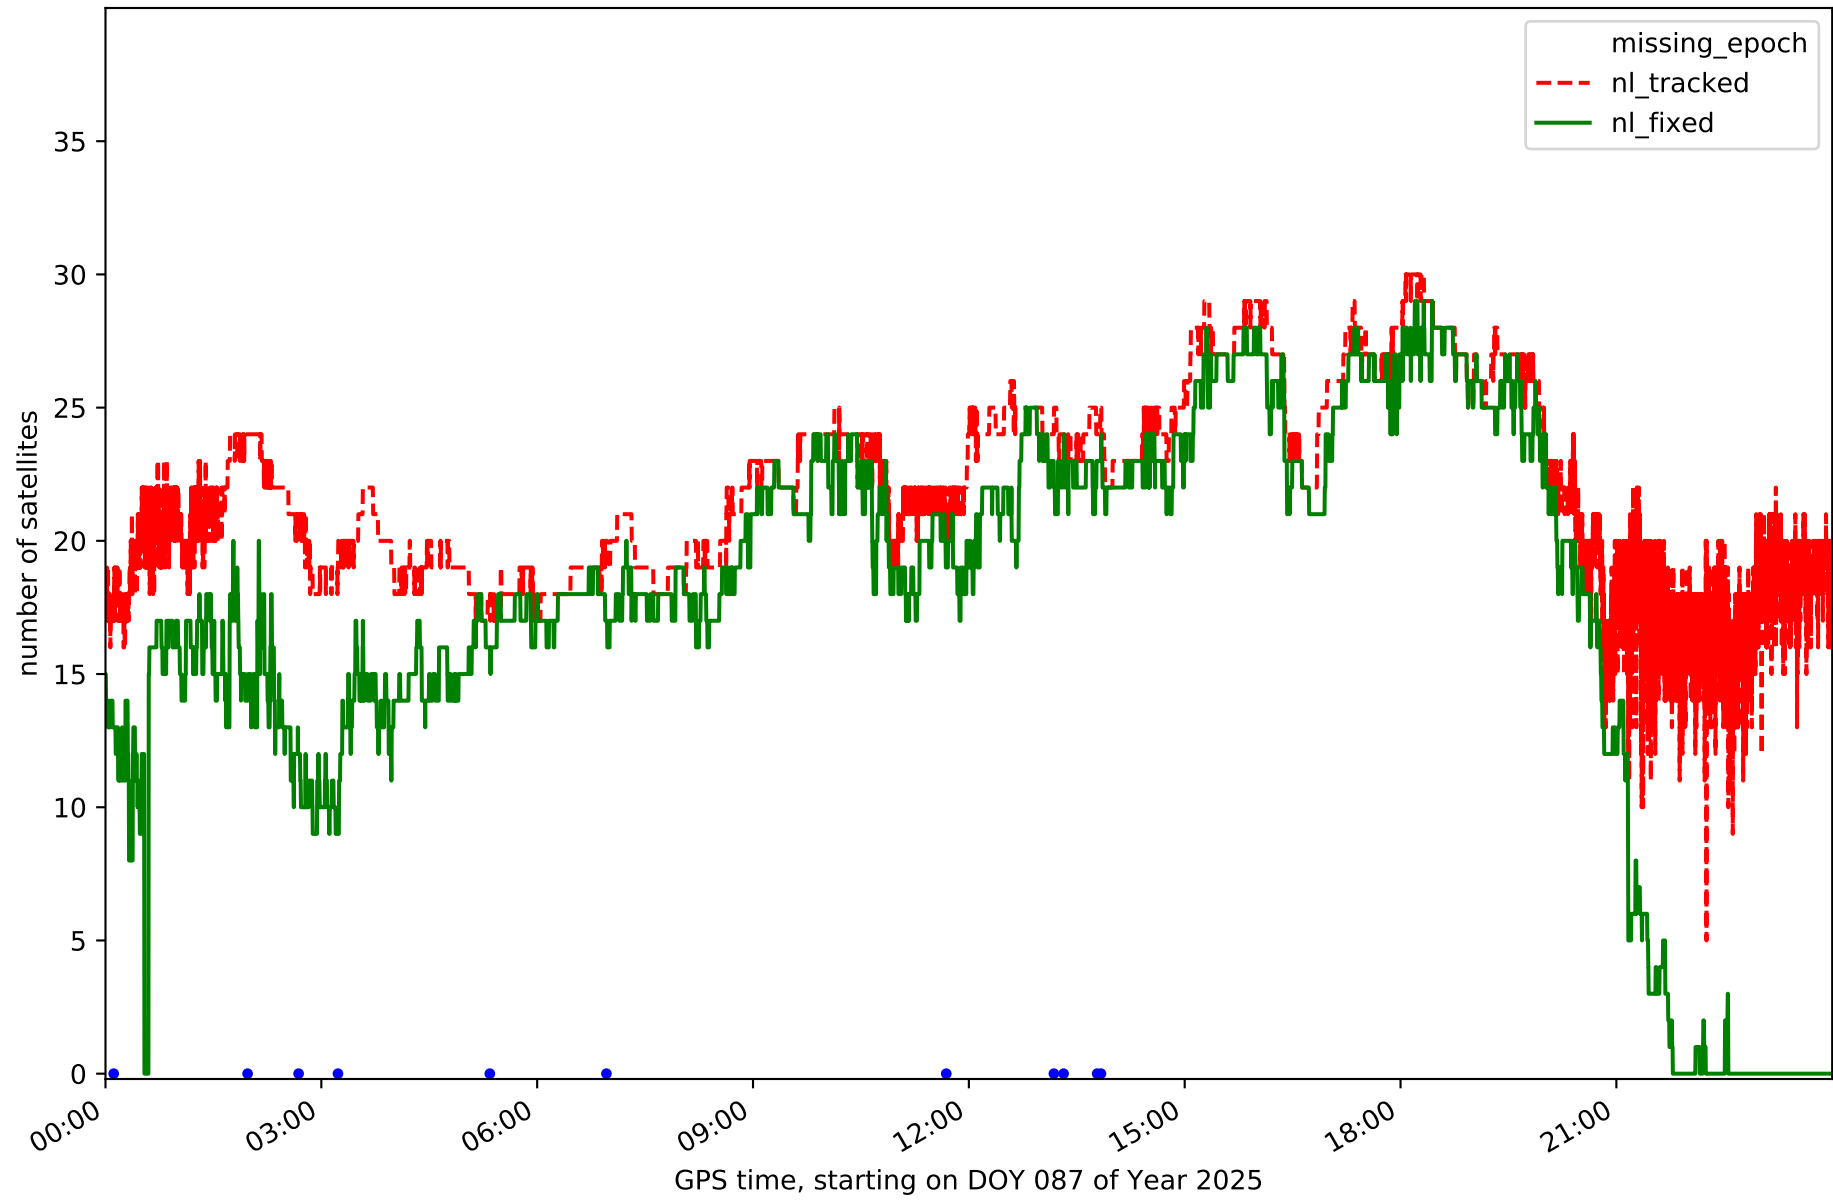


Station IZAN in network N32T

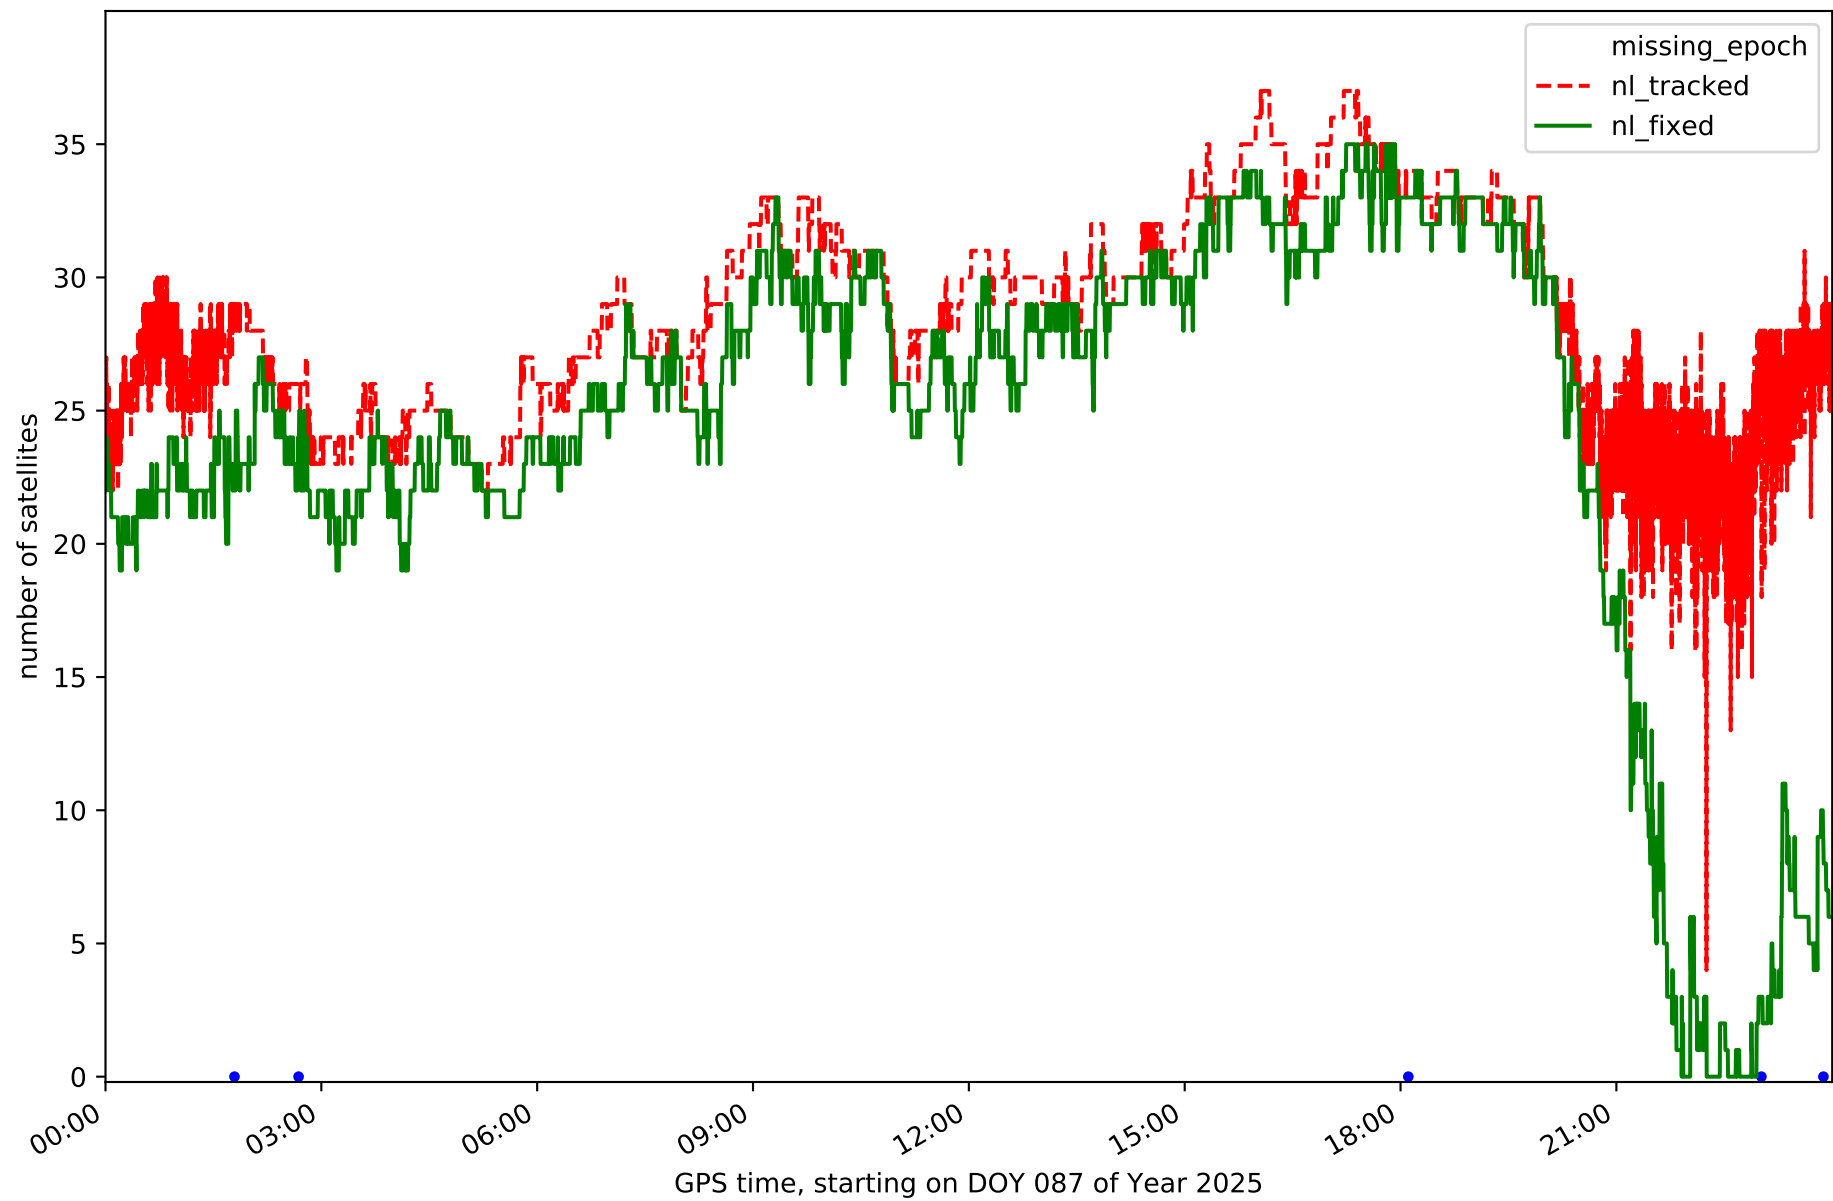


Station LP01 in network N32T

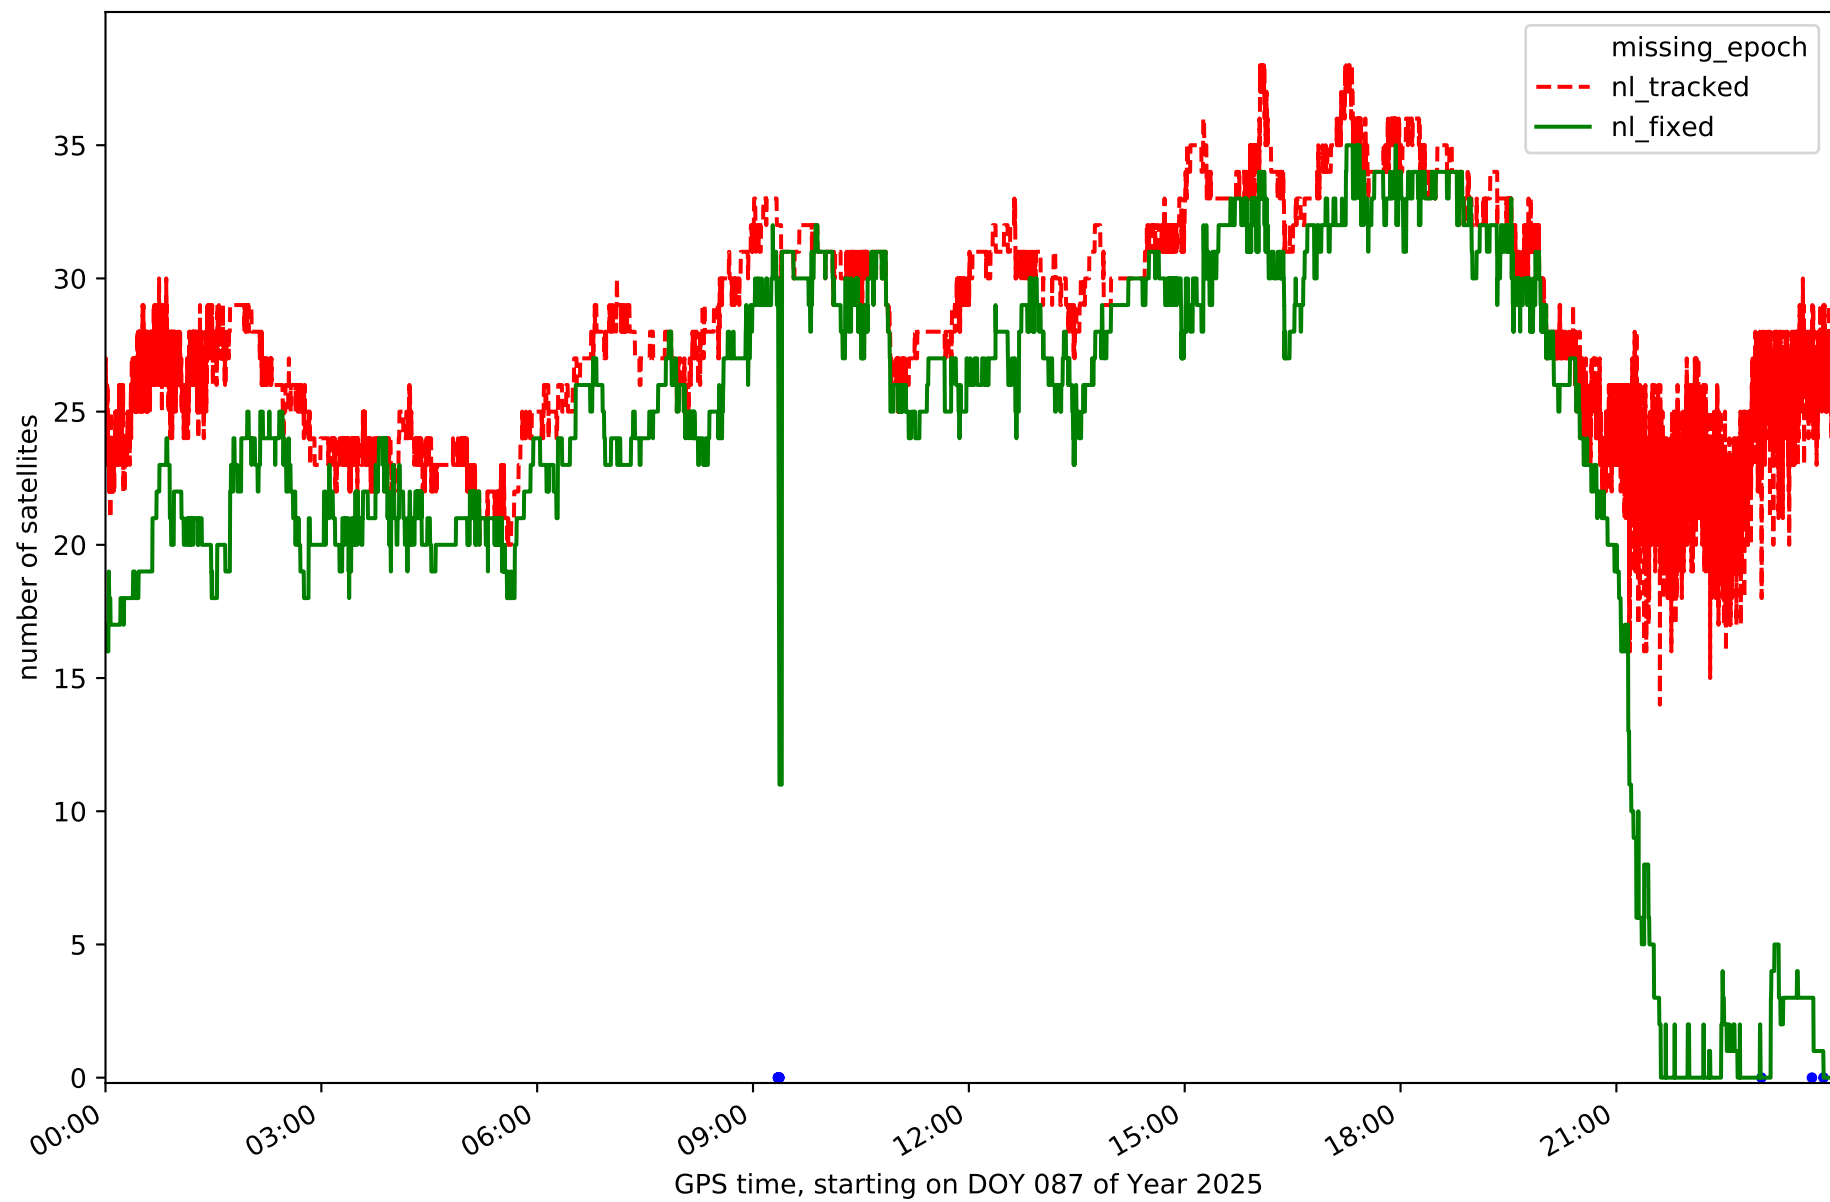


Station LP03 in network N32T

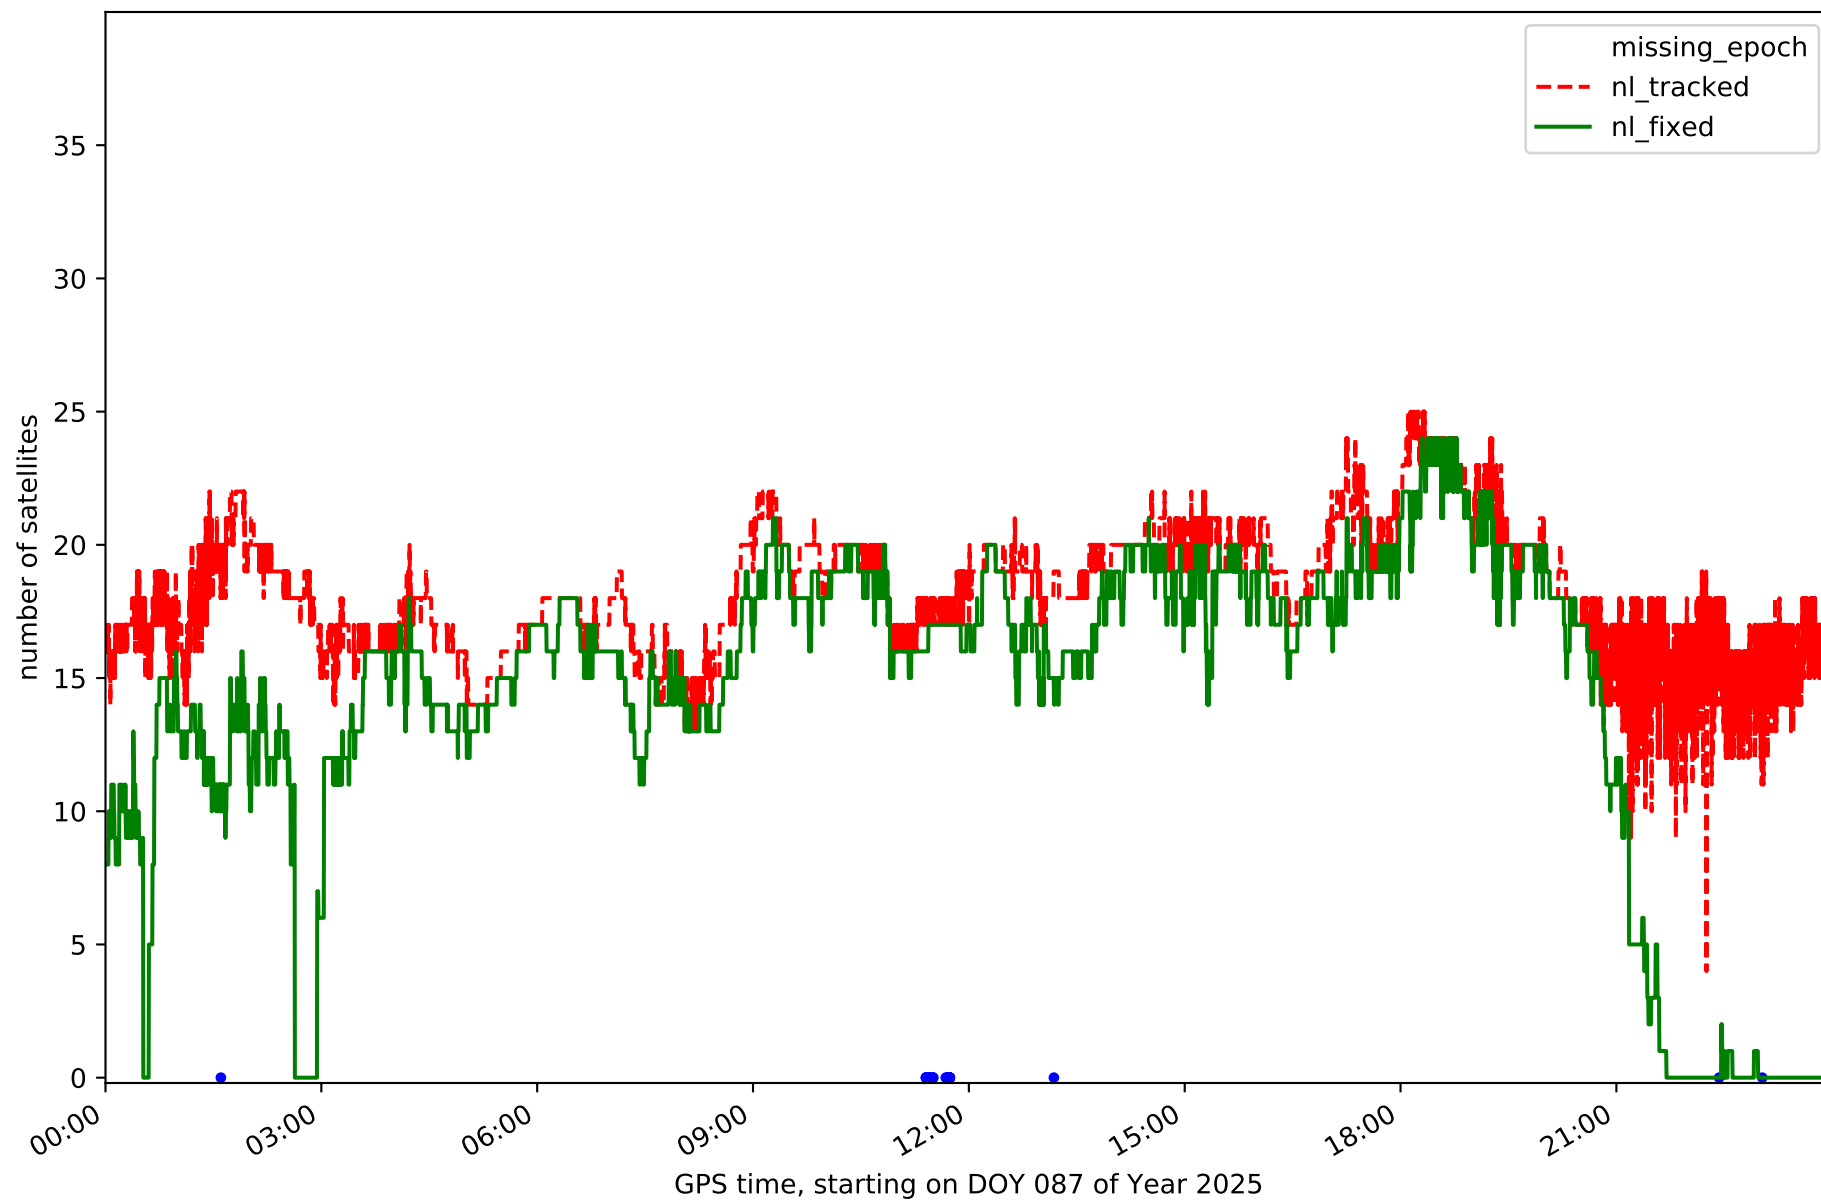


Station LPAL in network N32T

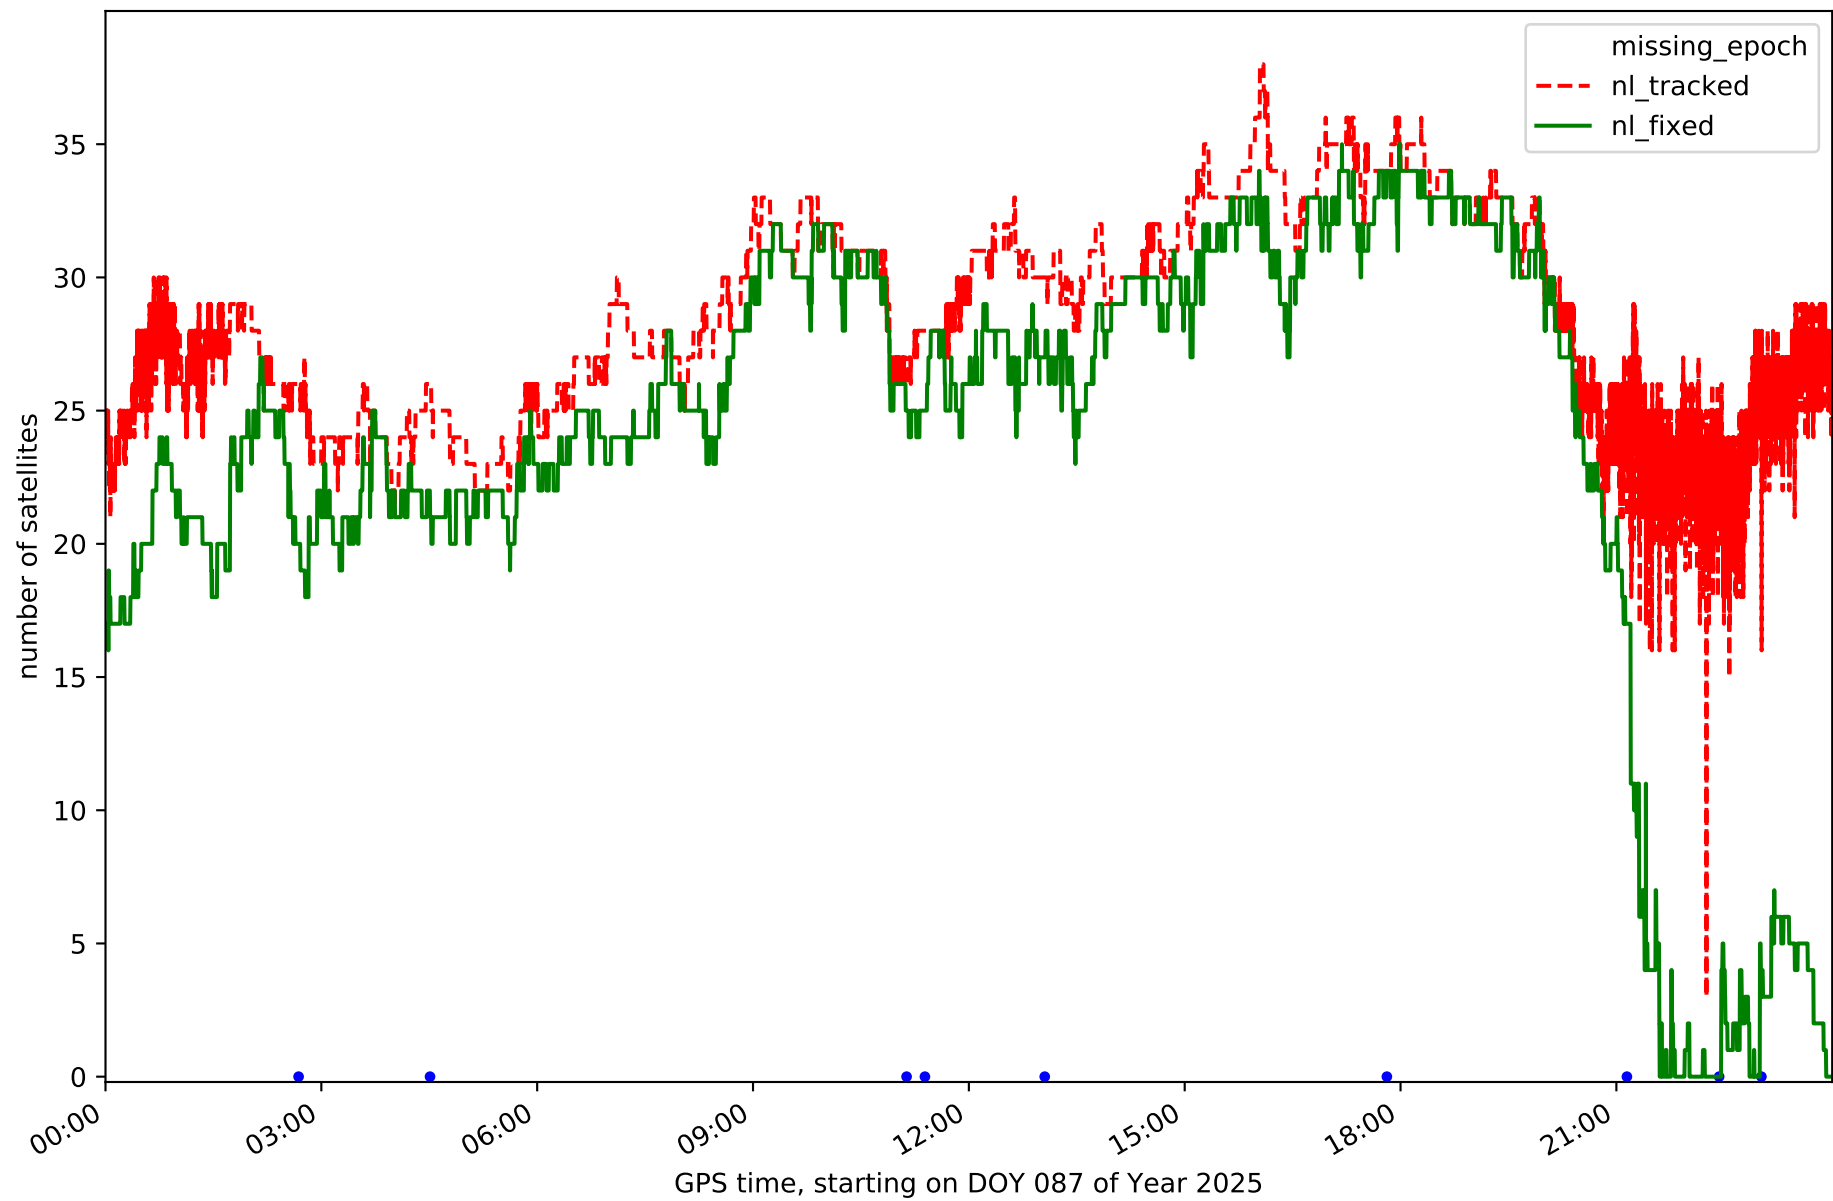


Station LRES in network N32T

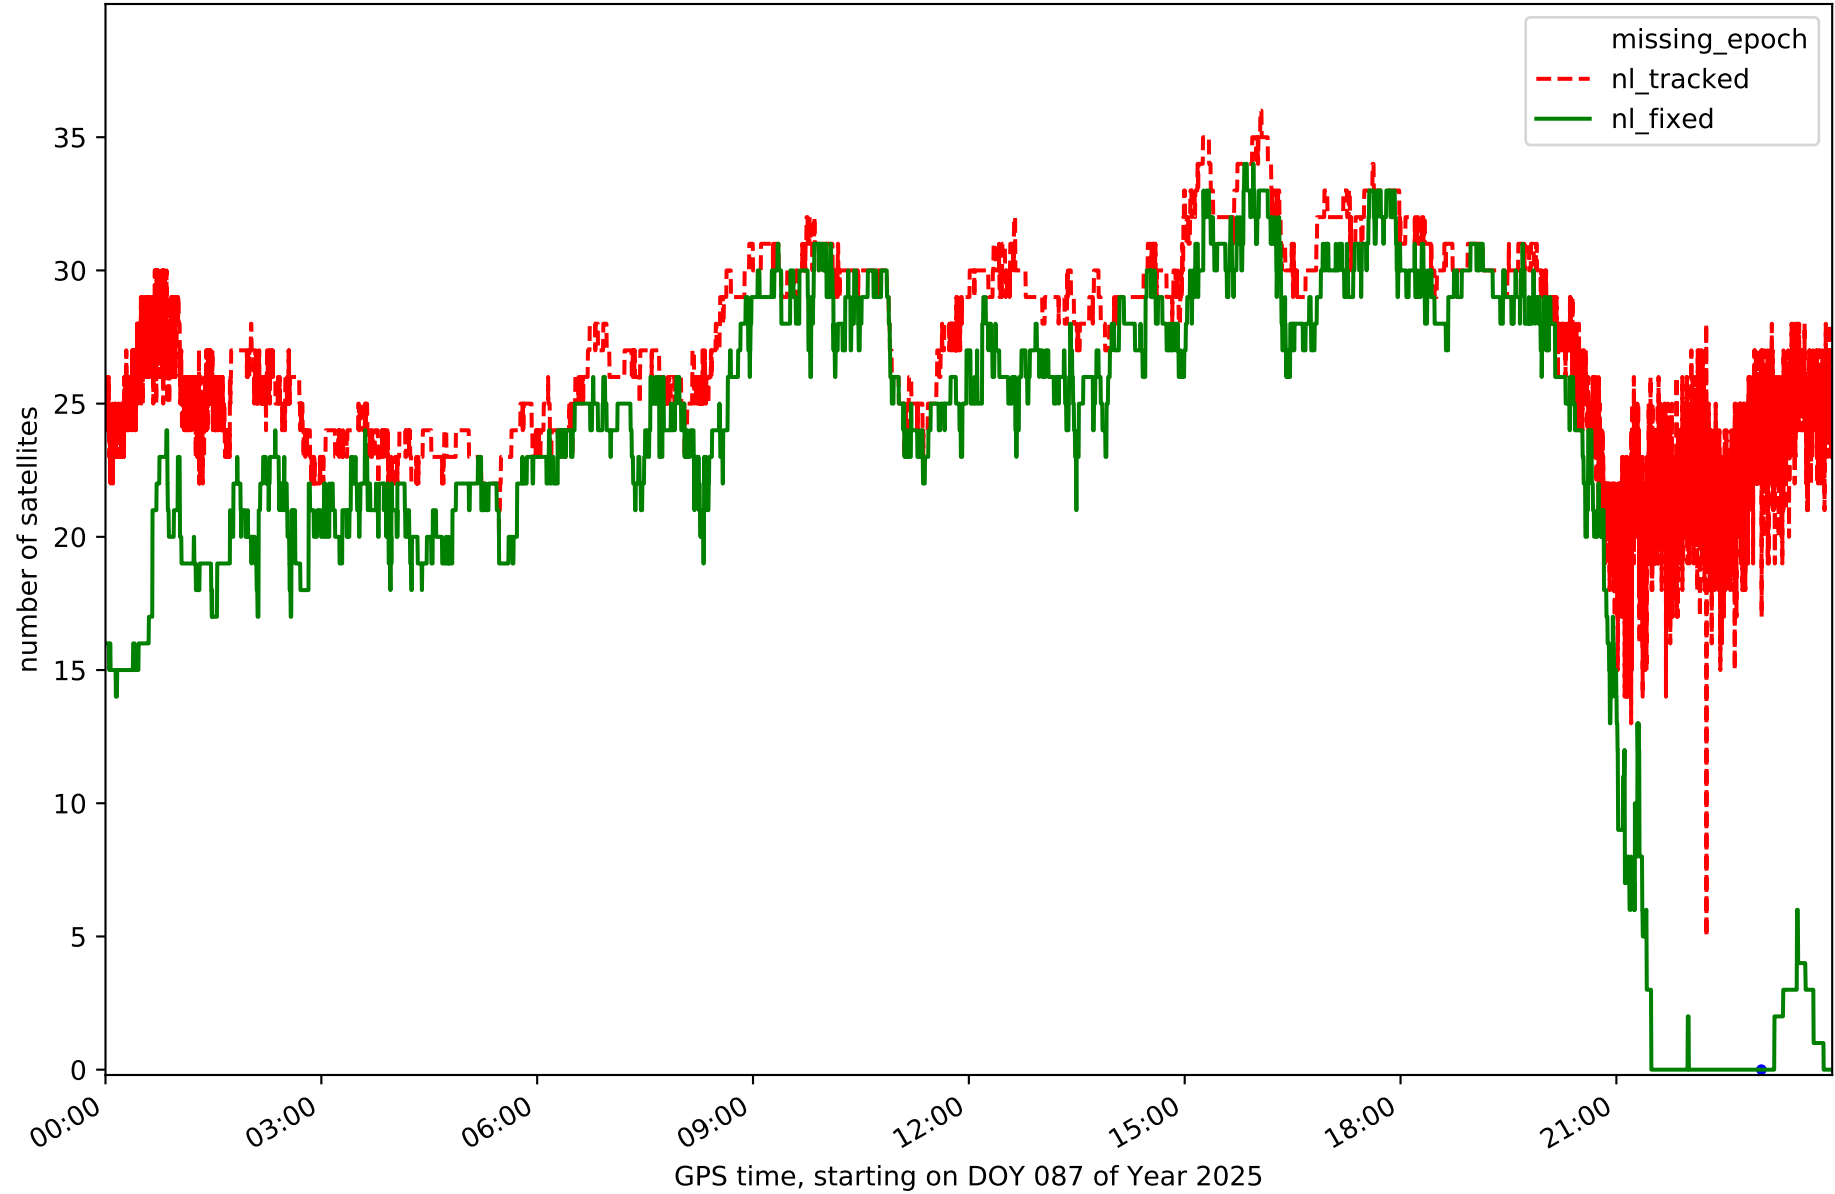


Station TN01 in network N32T

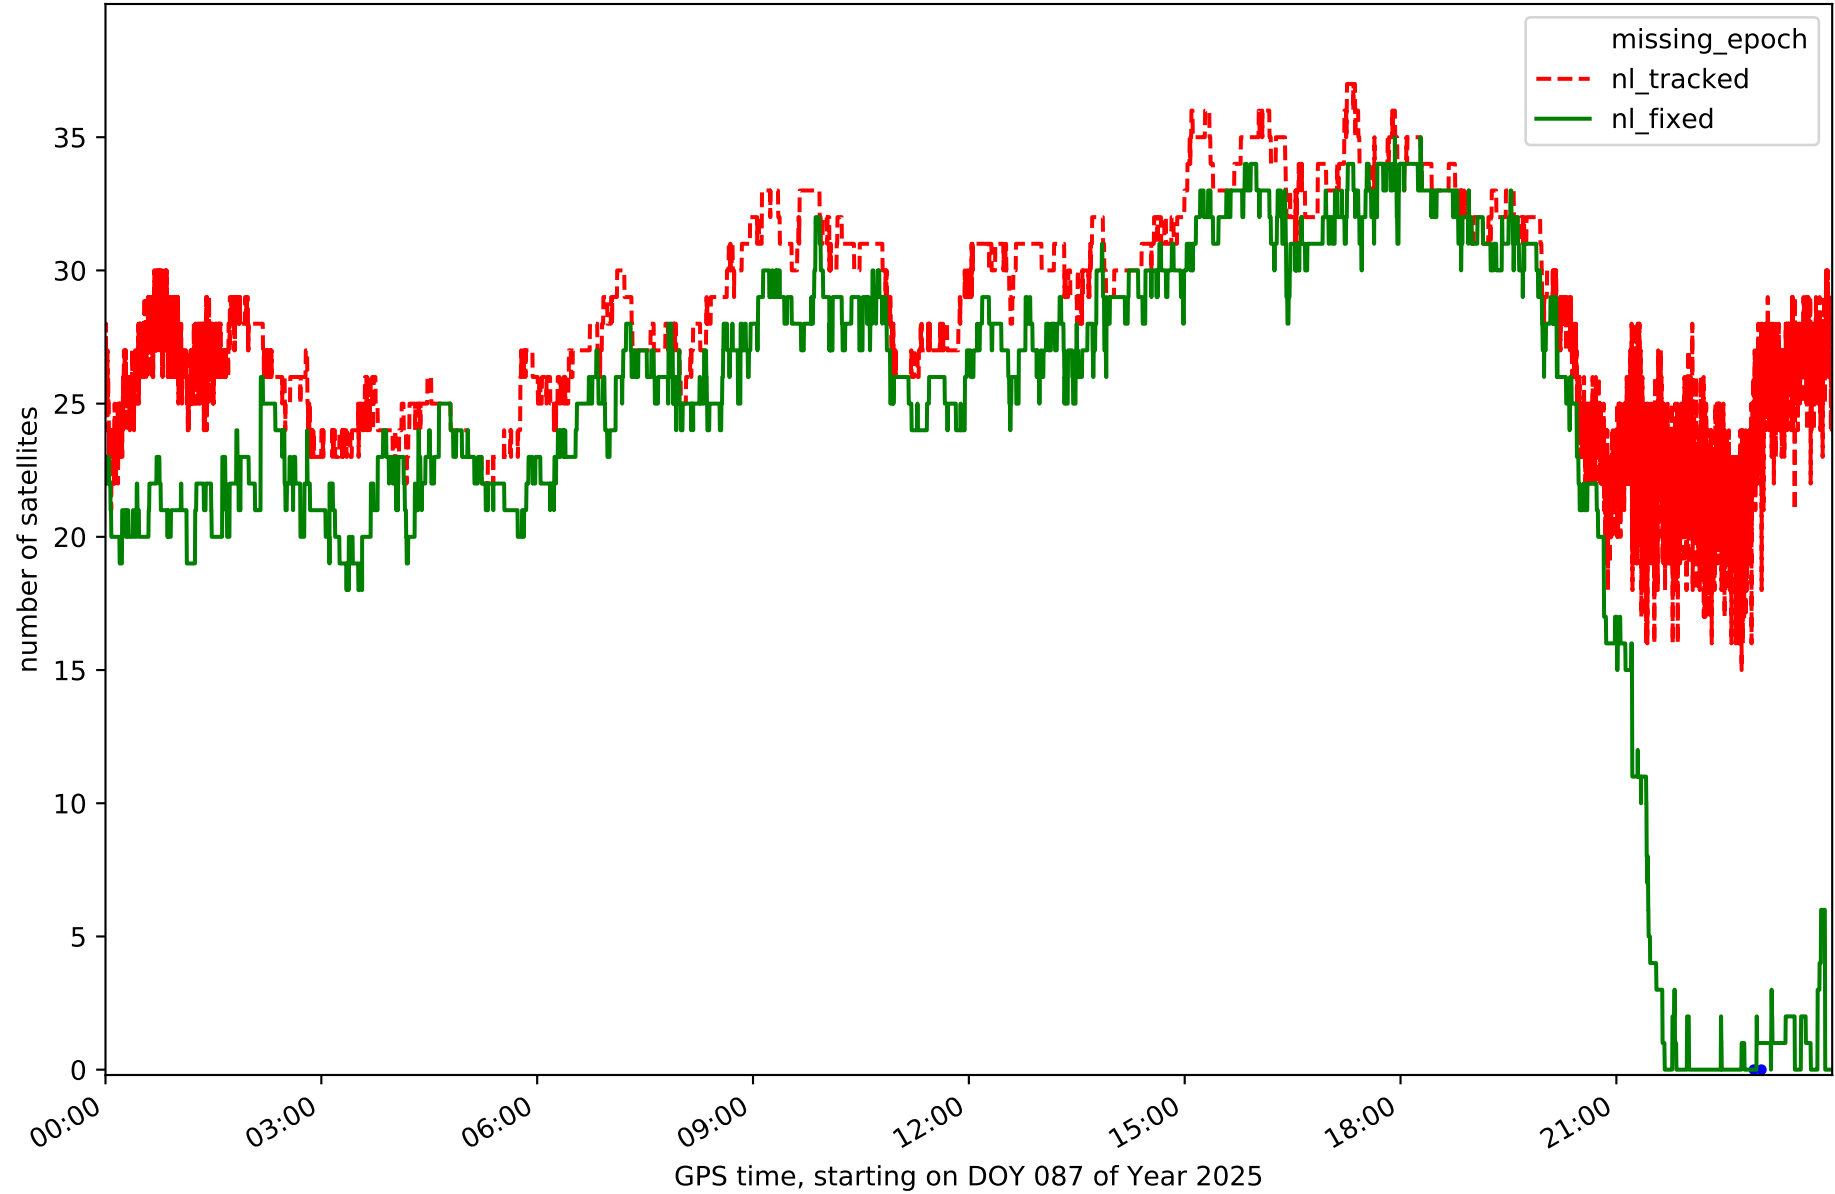


Station TN02 in network N32T

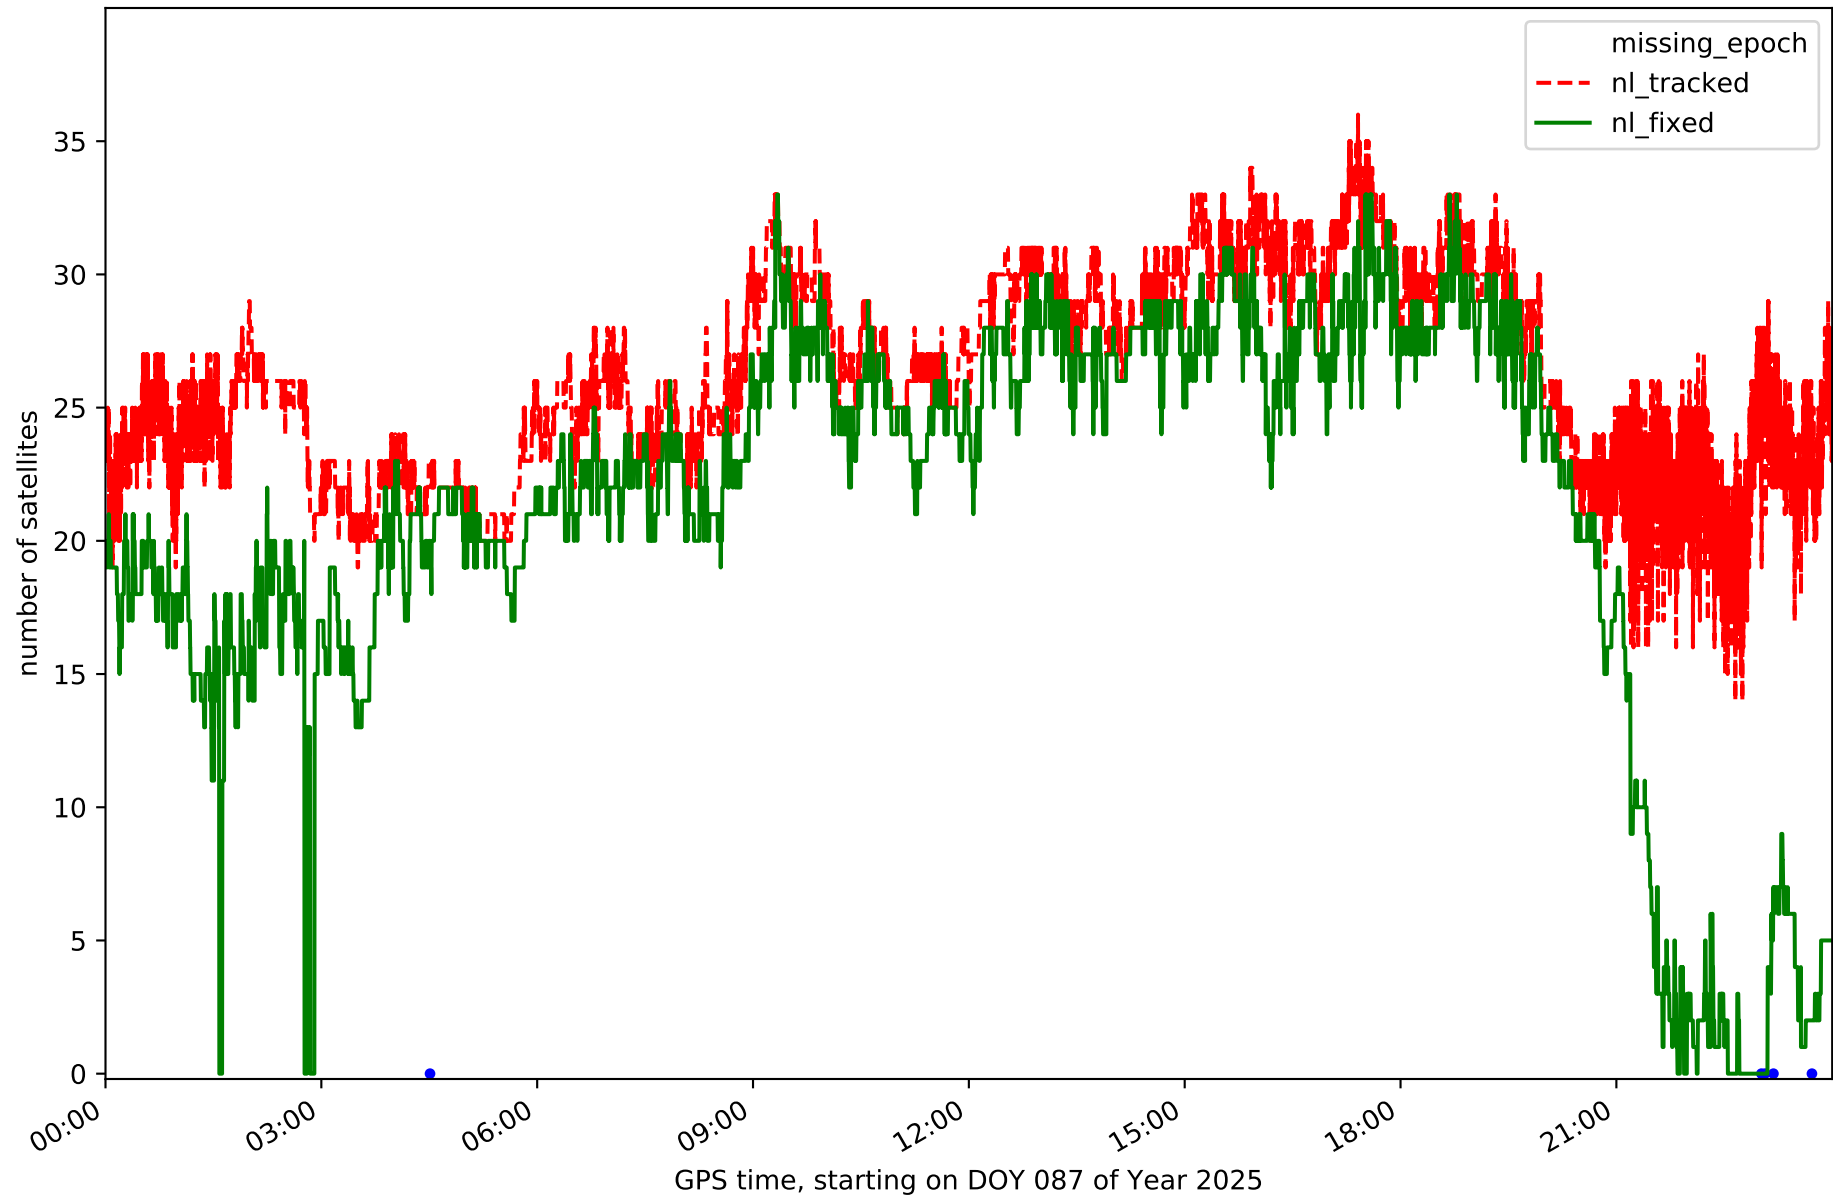


Station TN03 in network N32T

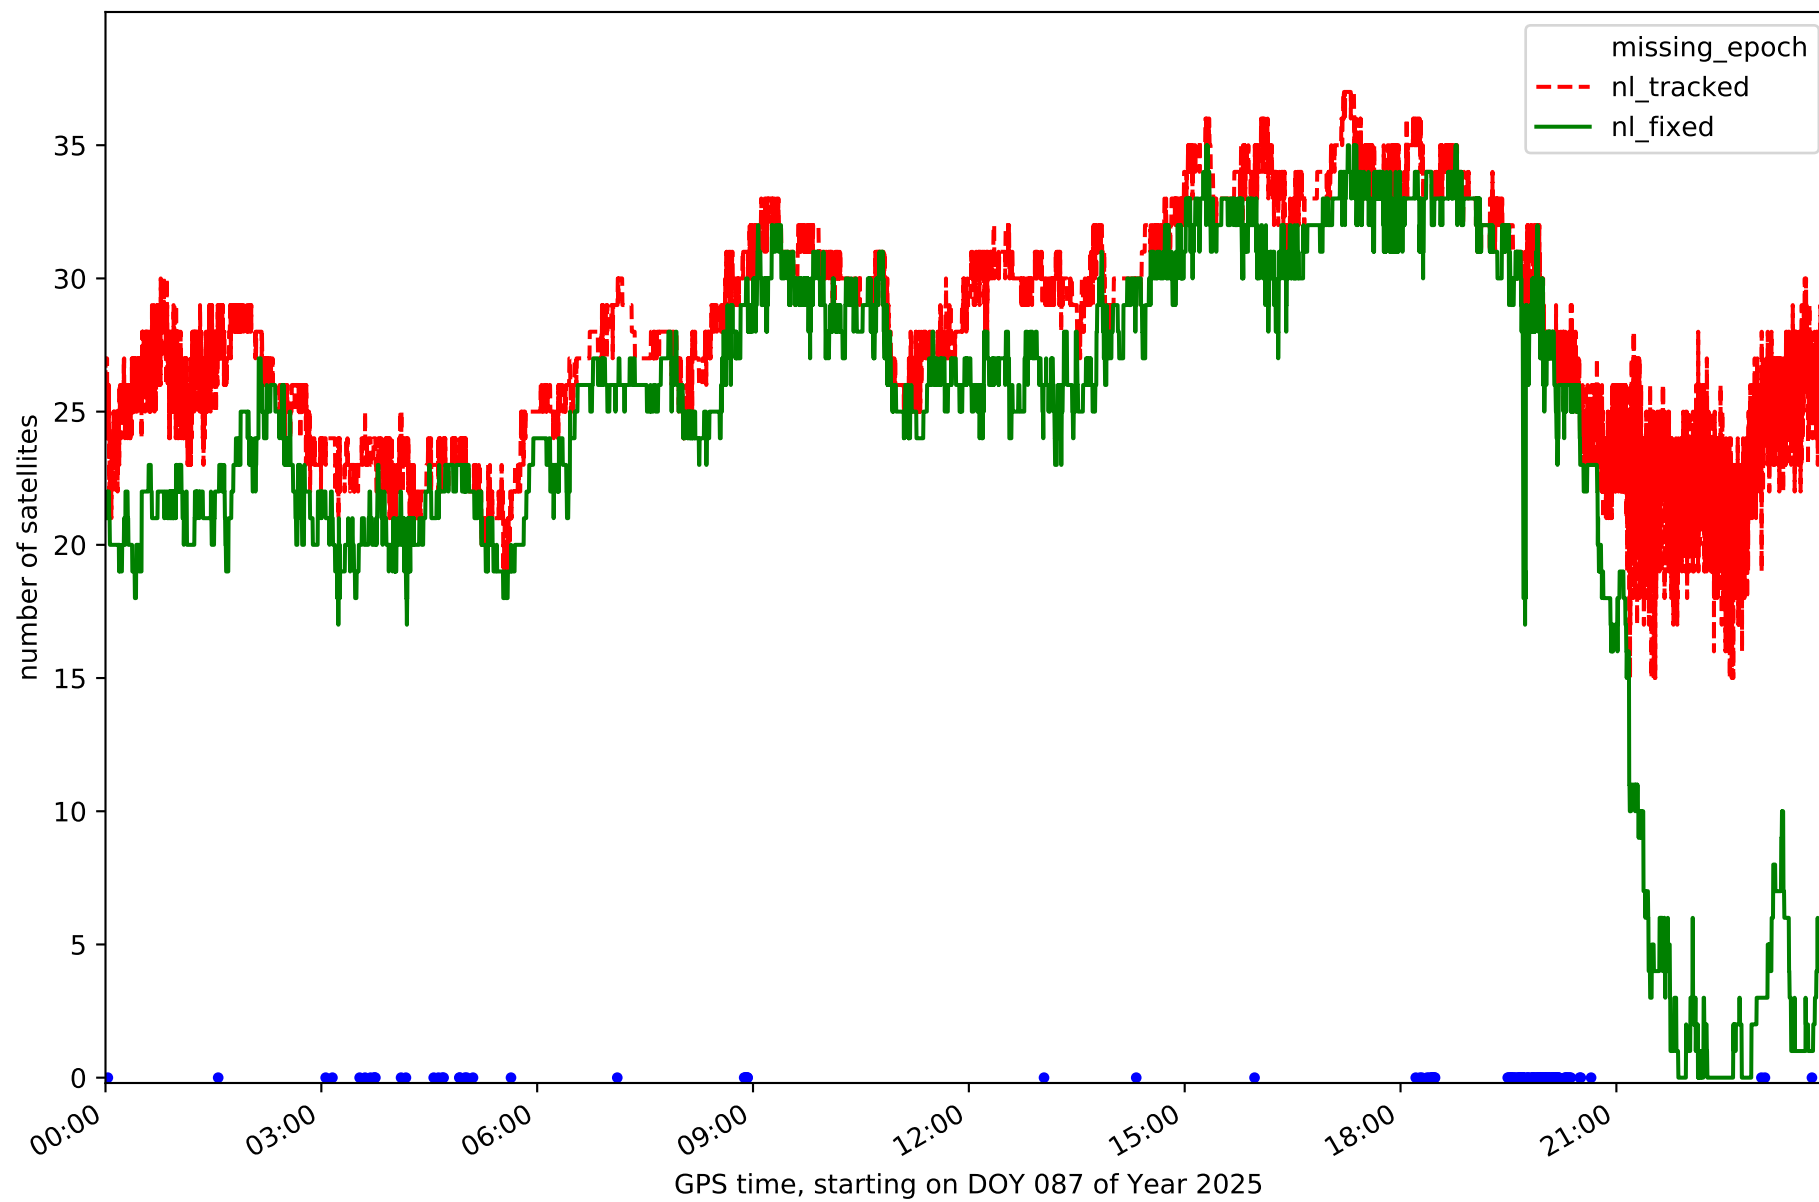


Station TN06 in network N32T

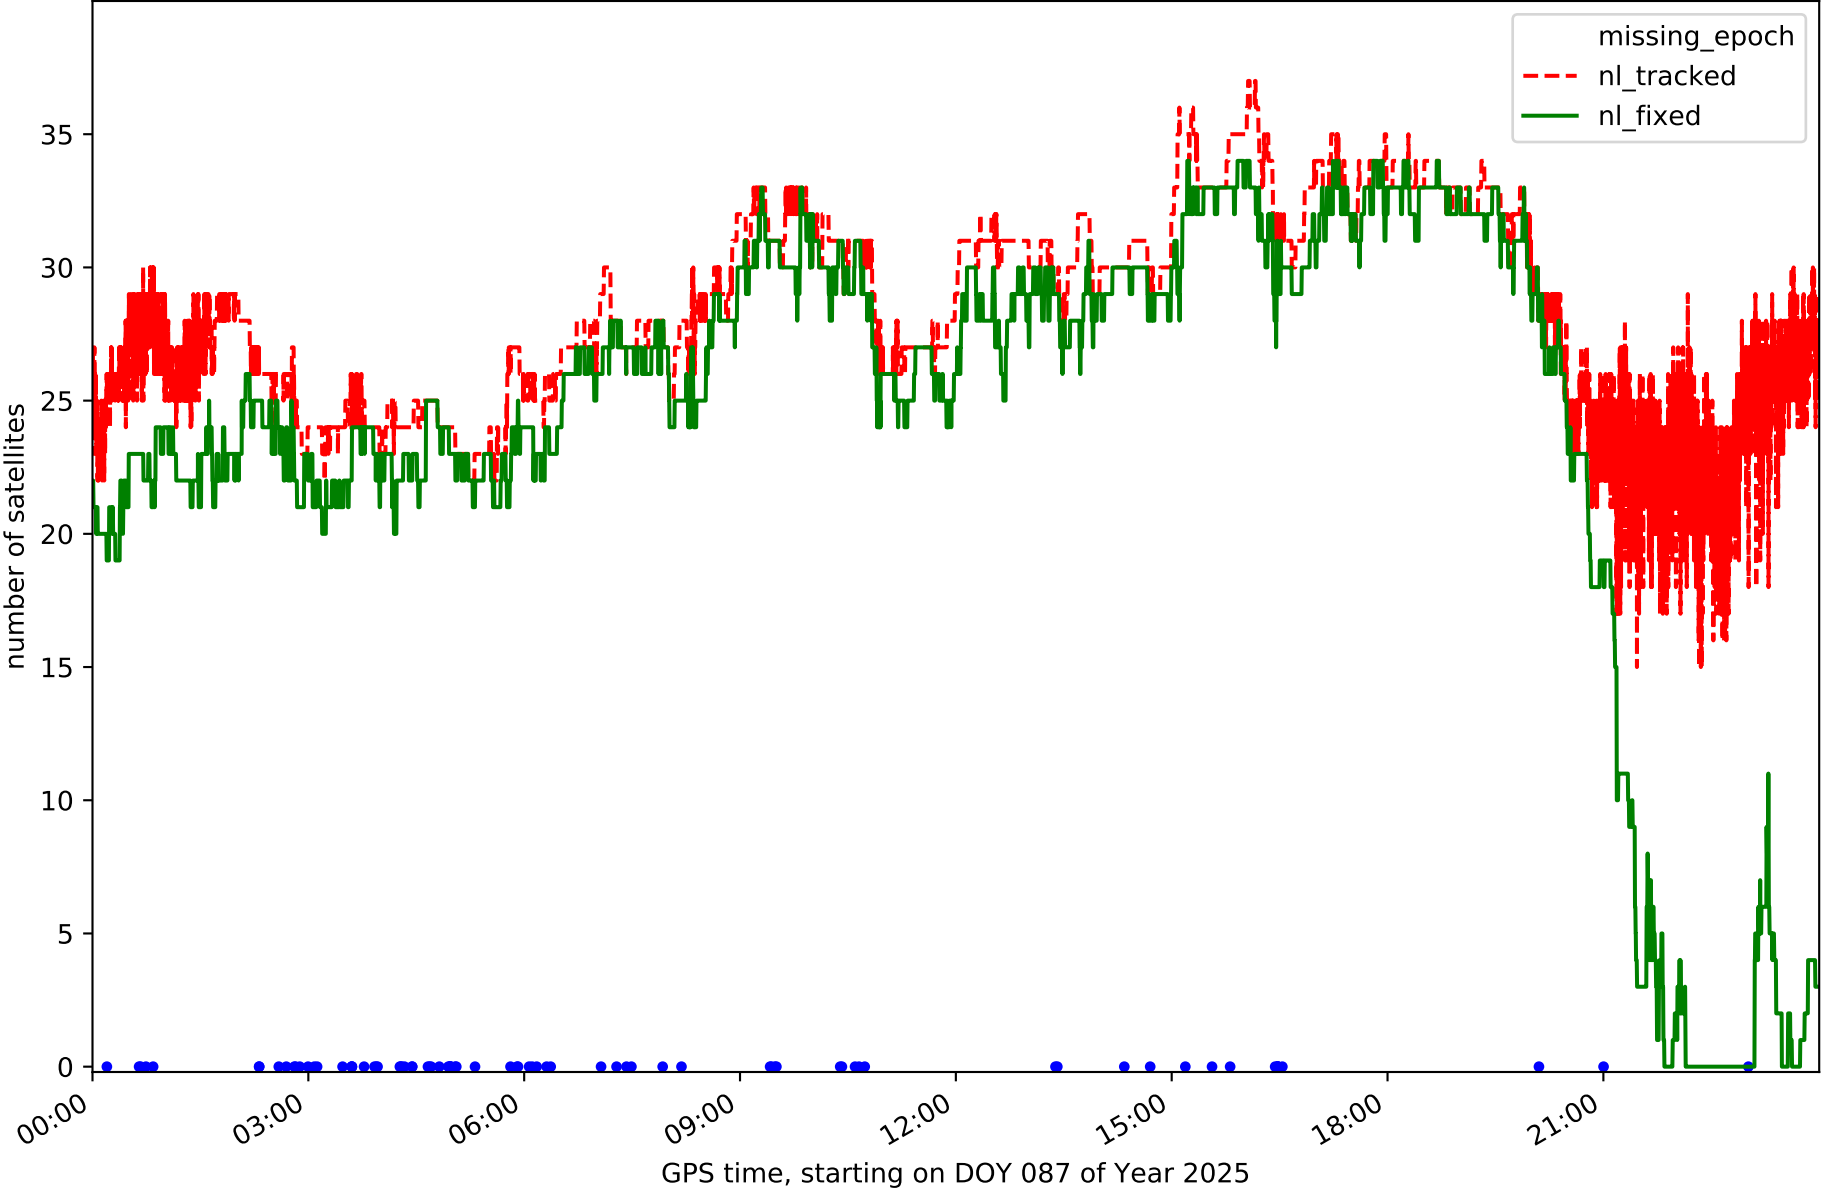


Station TN09 in network N32T

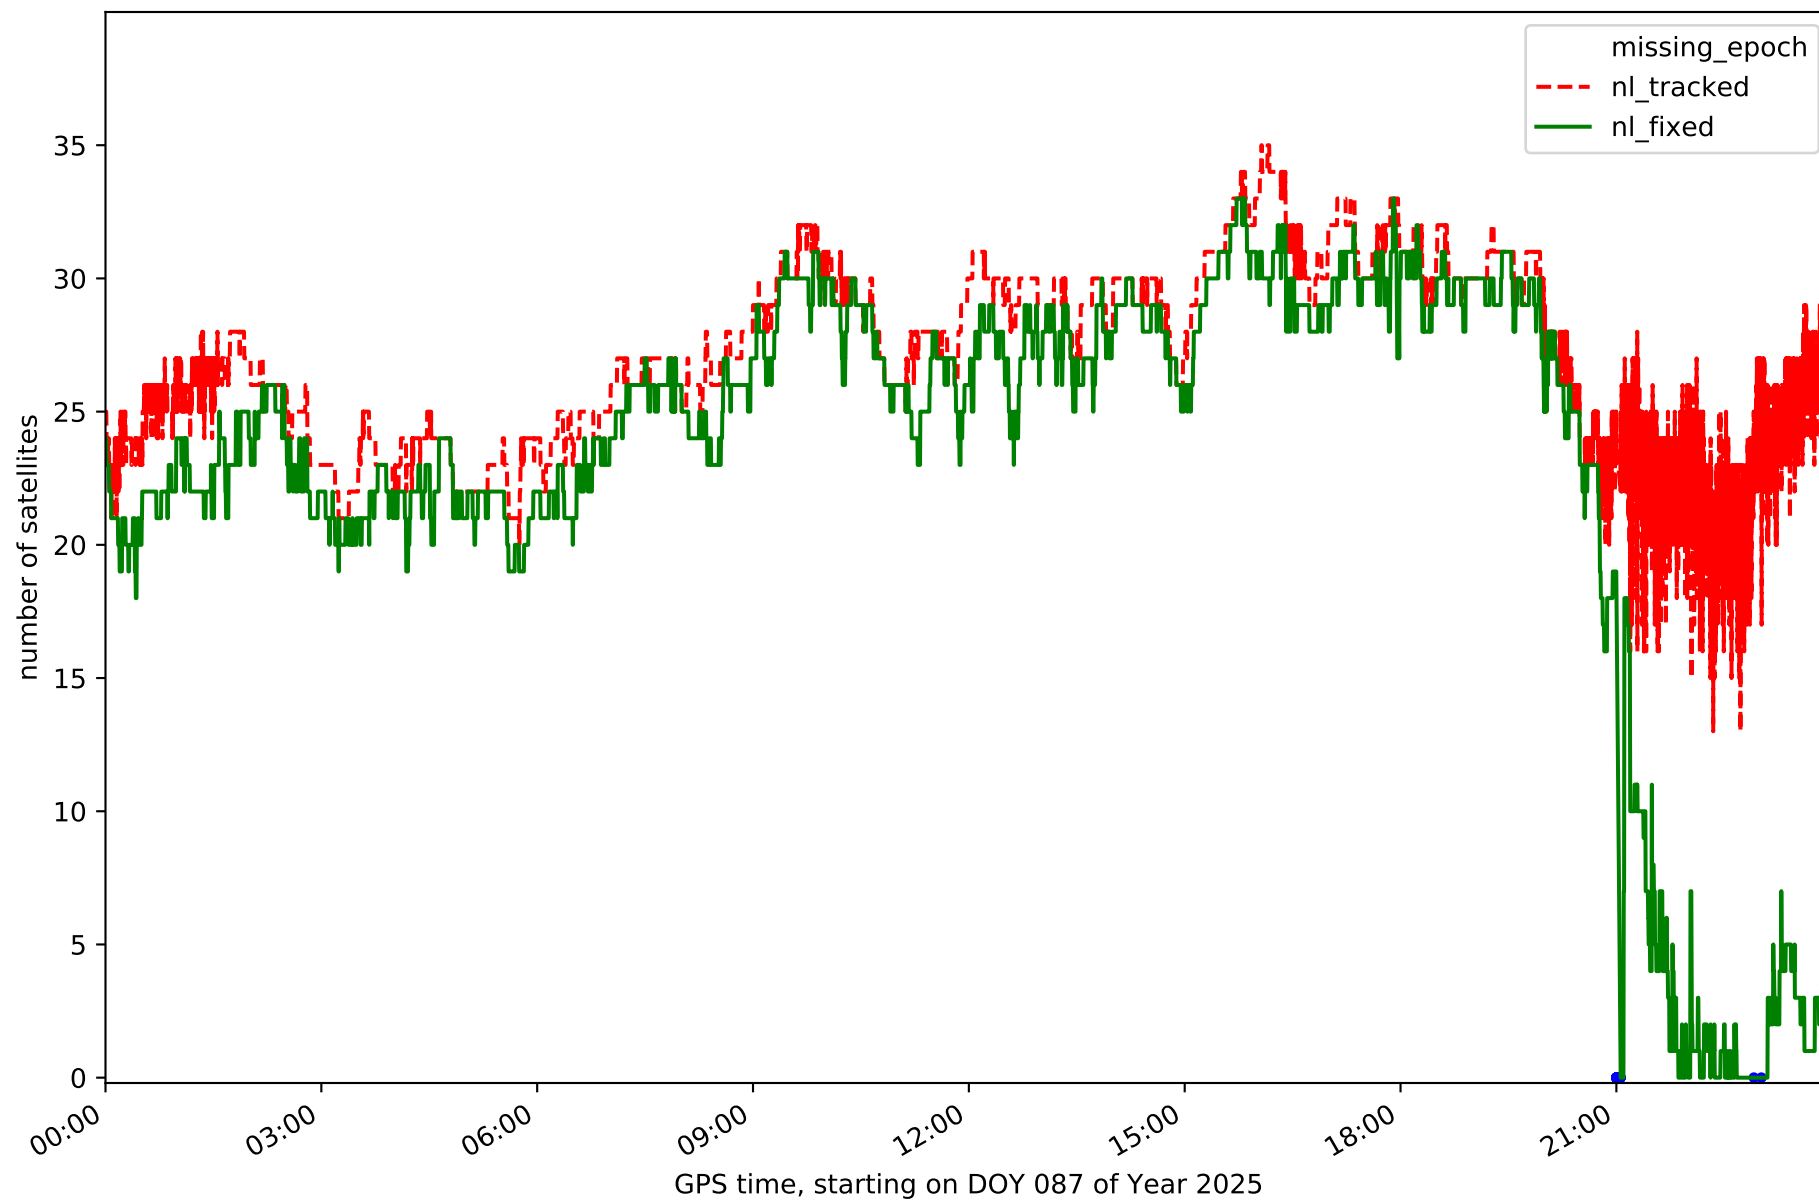


Station TE11 in network N32T

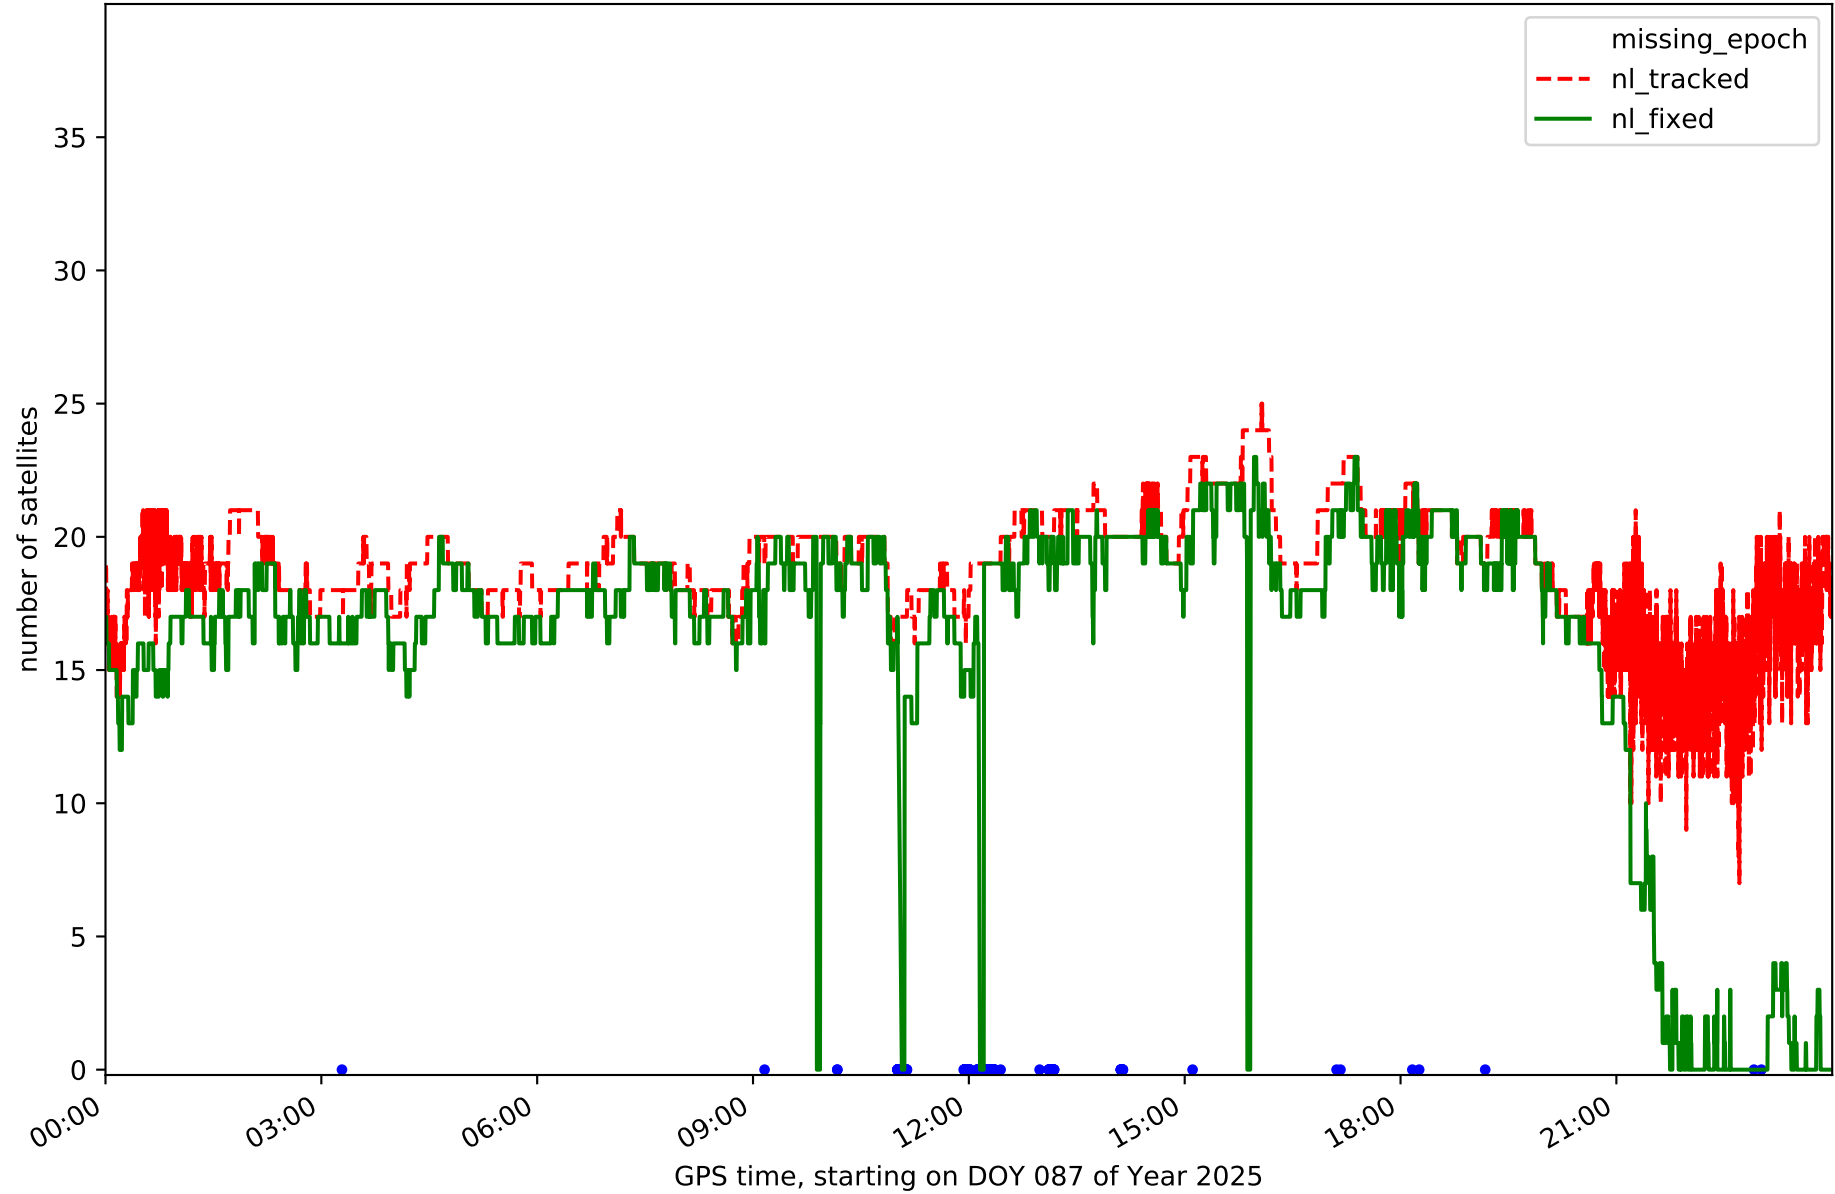


RefCheck for station EH01 in network N32T

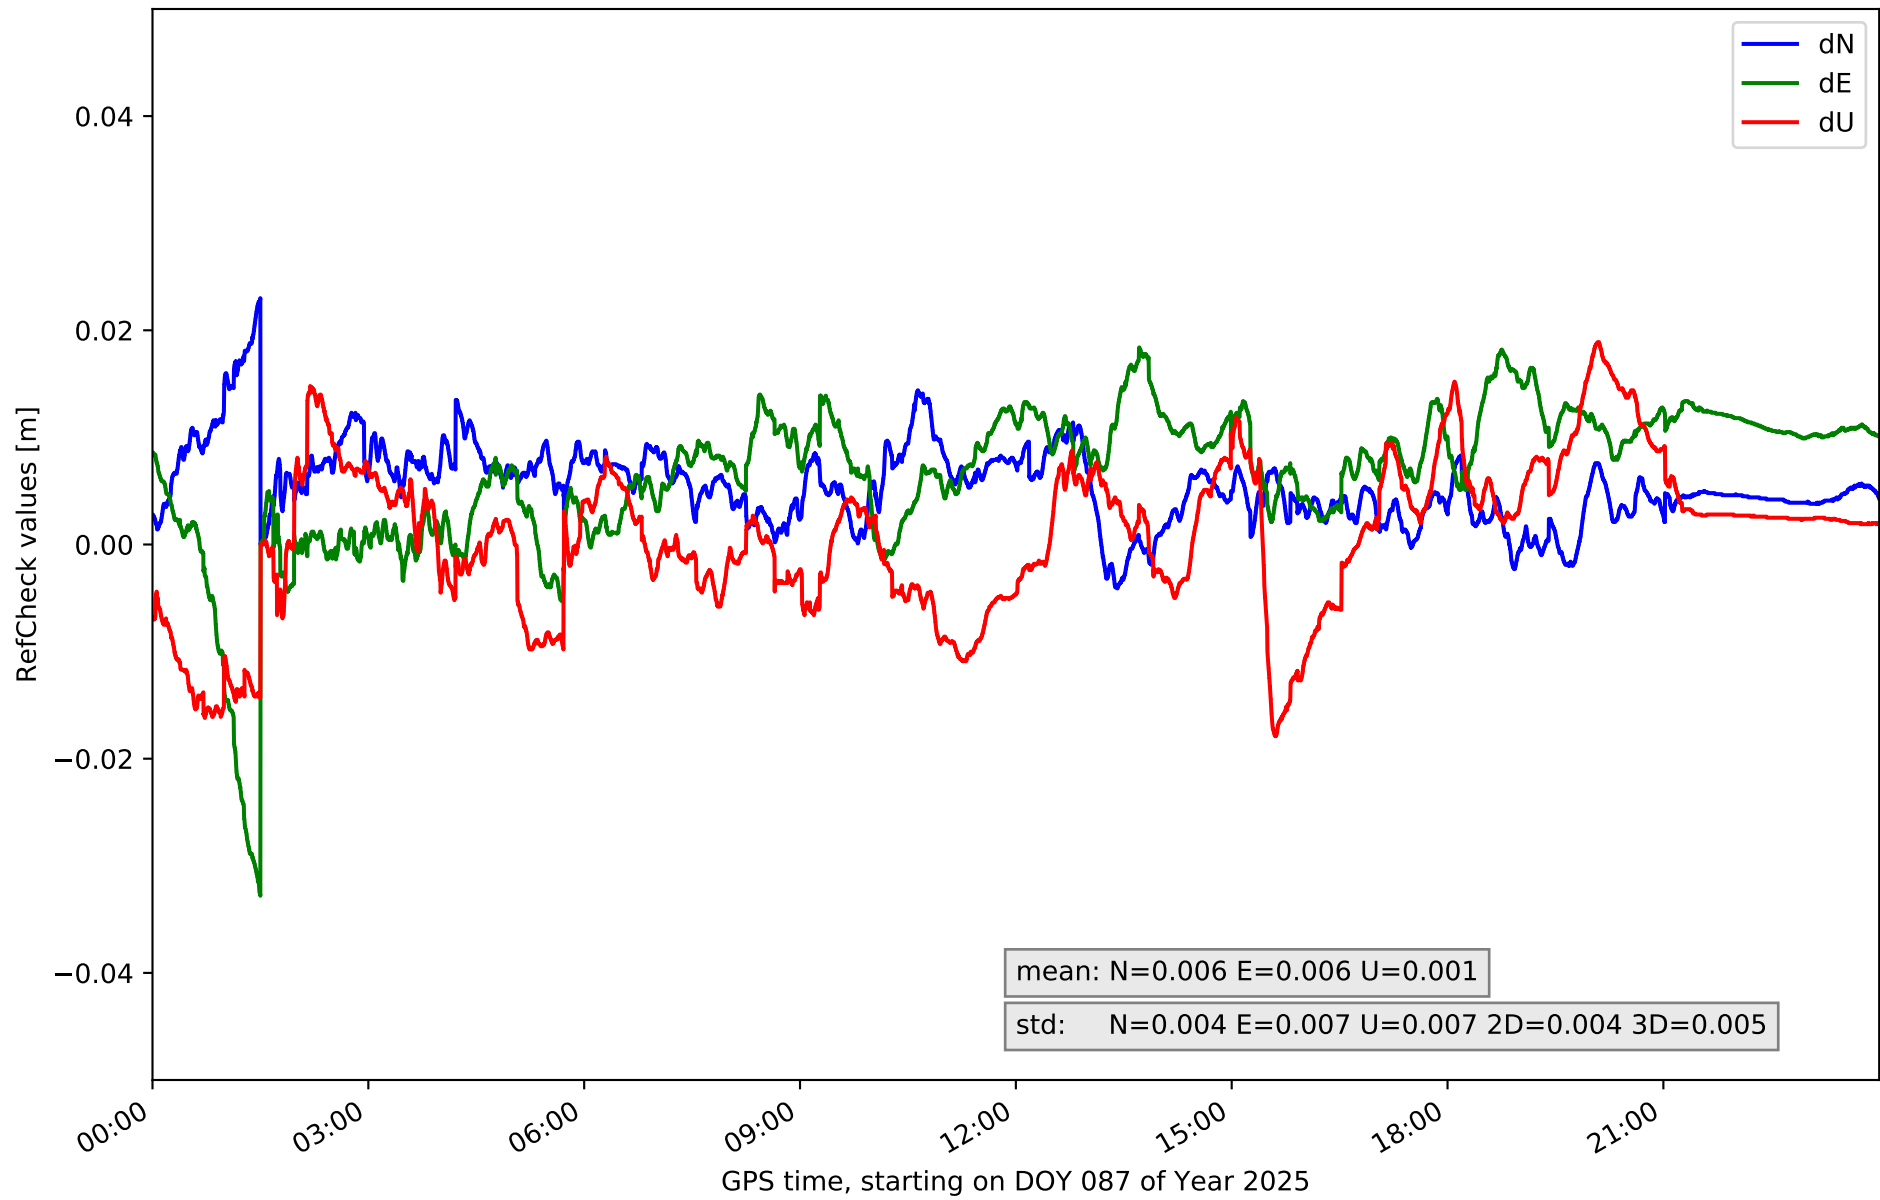


RefCheck for station EH02 in network N32T

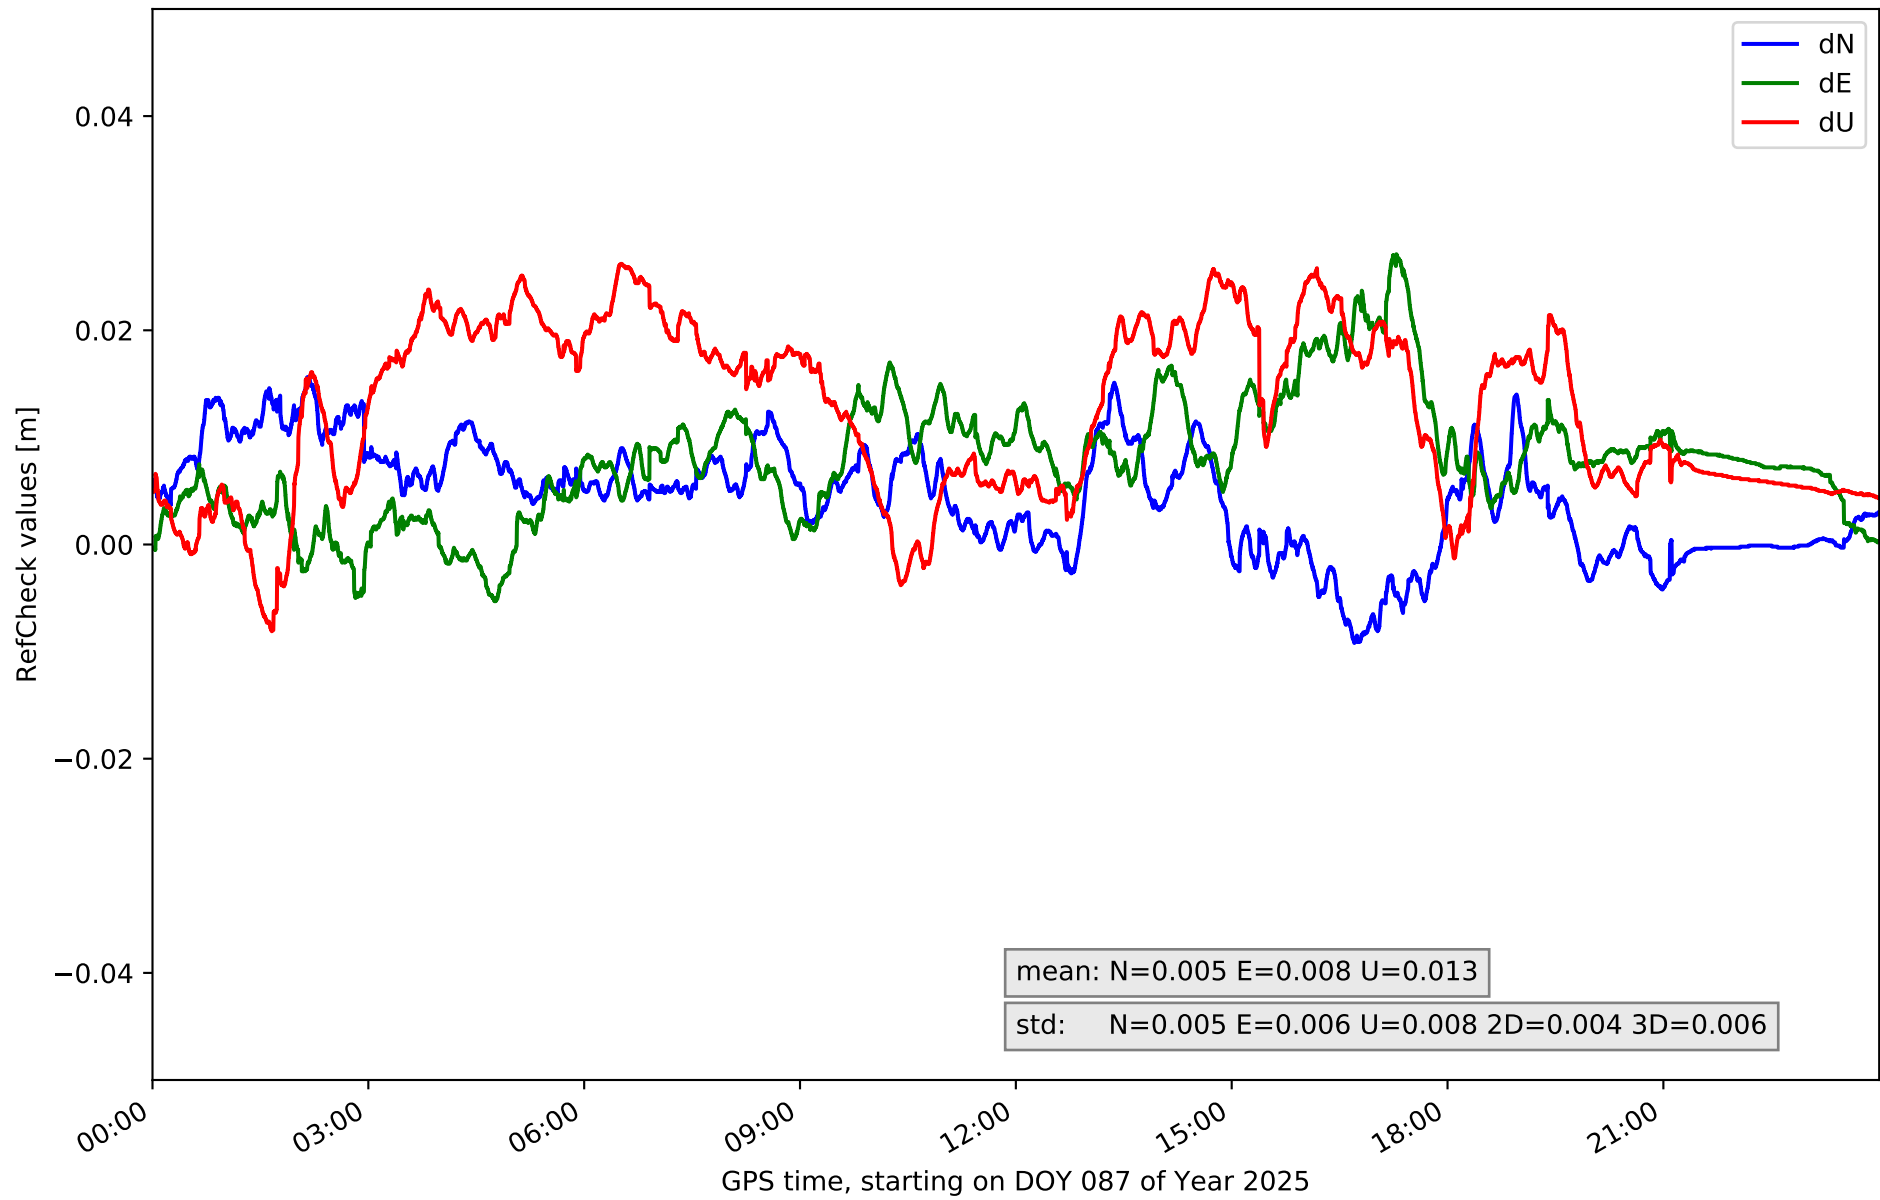


RefCheck for station GOM1 in network N32T

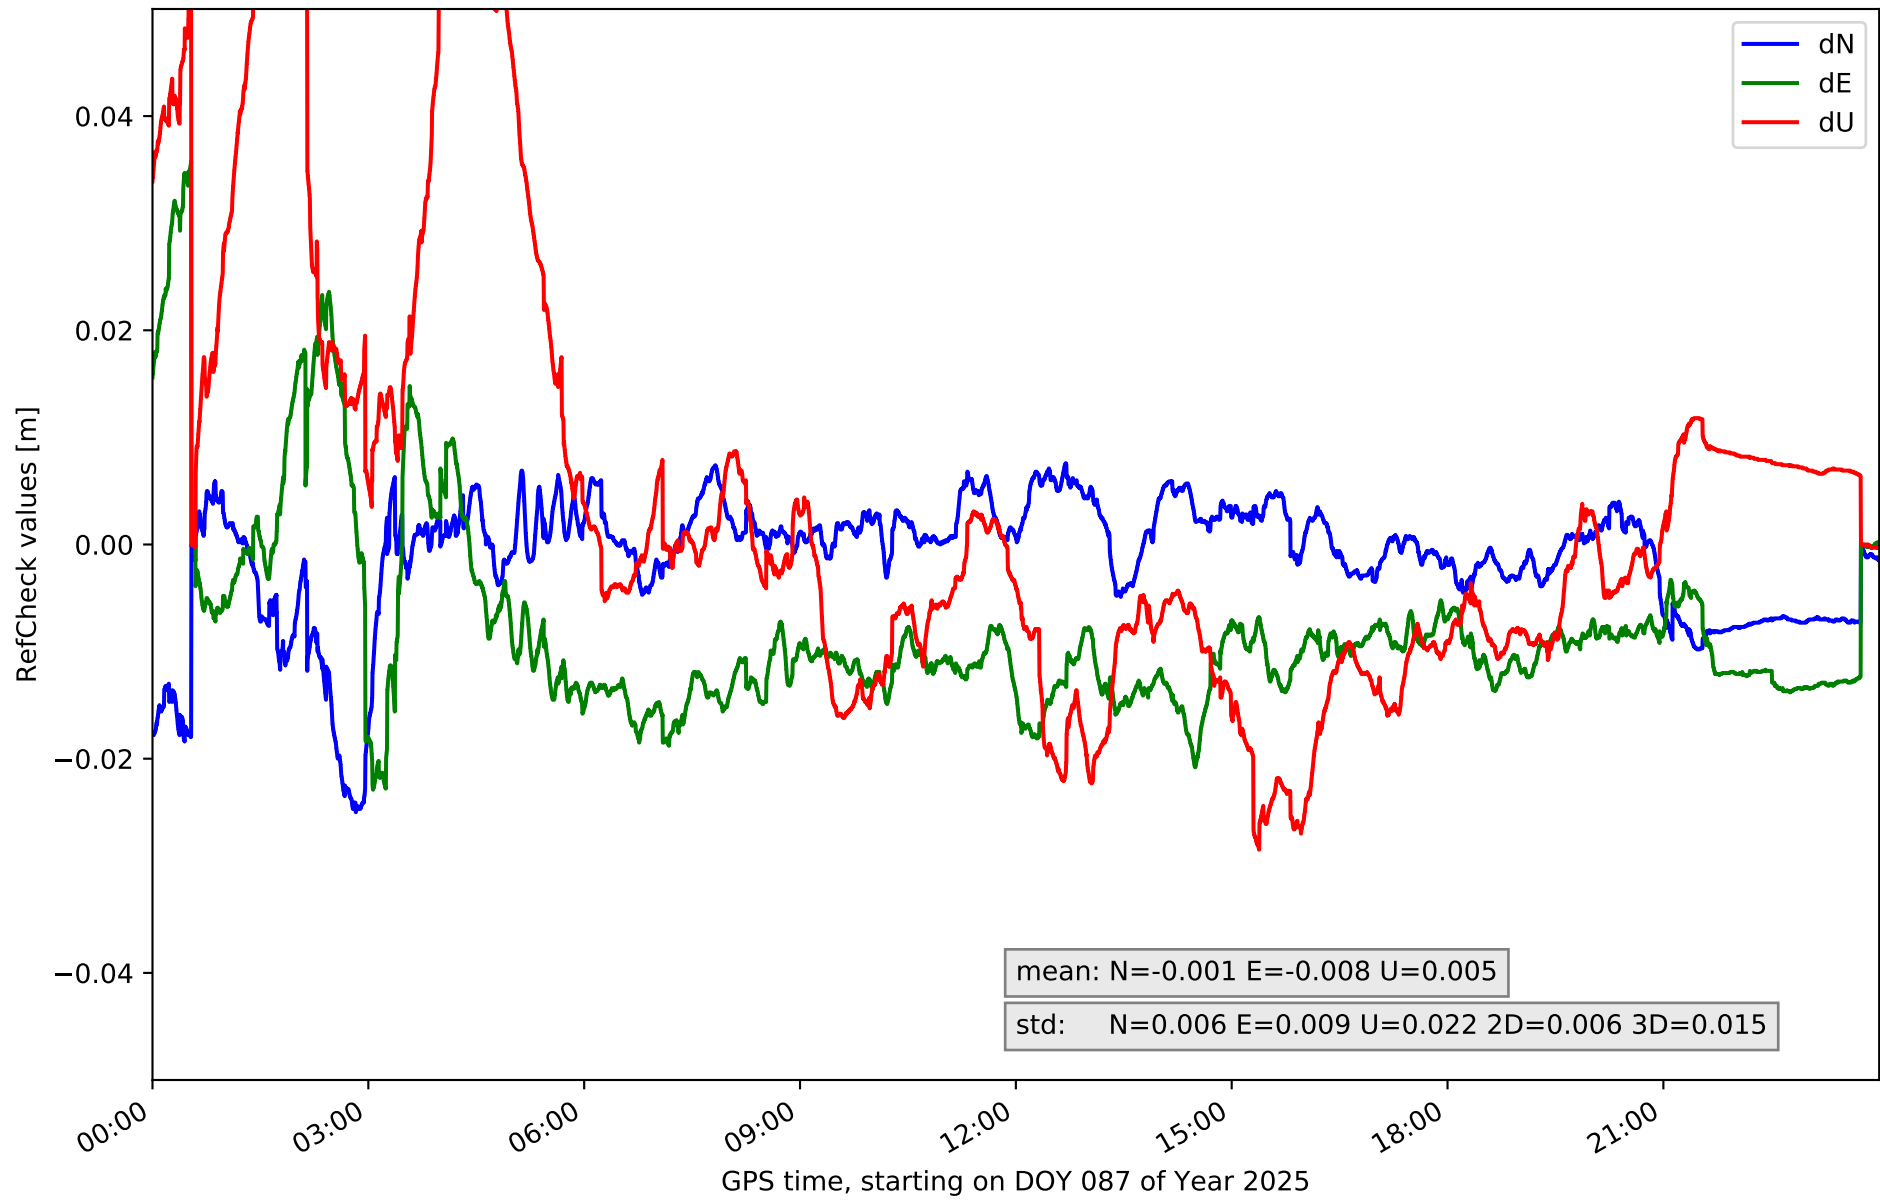


RefCheck for station IZAN in network N32T

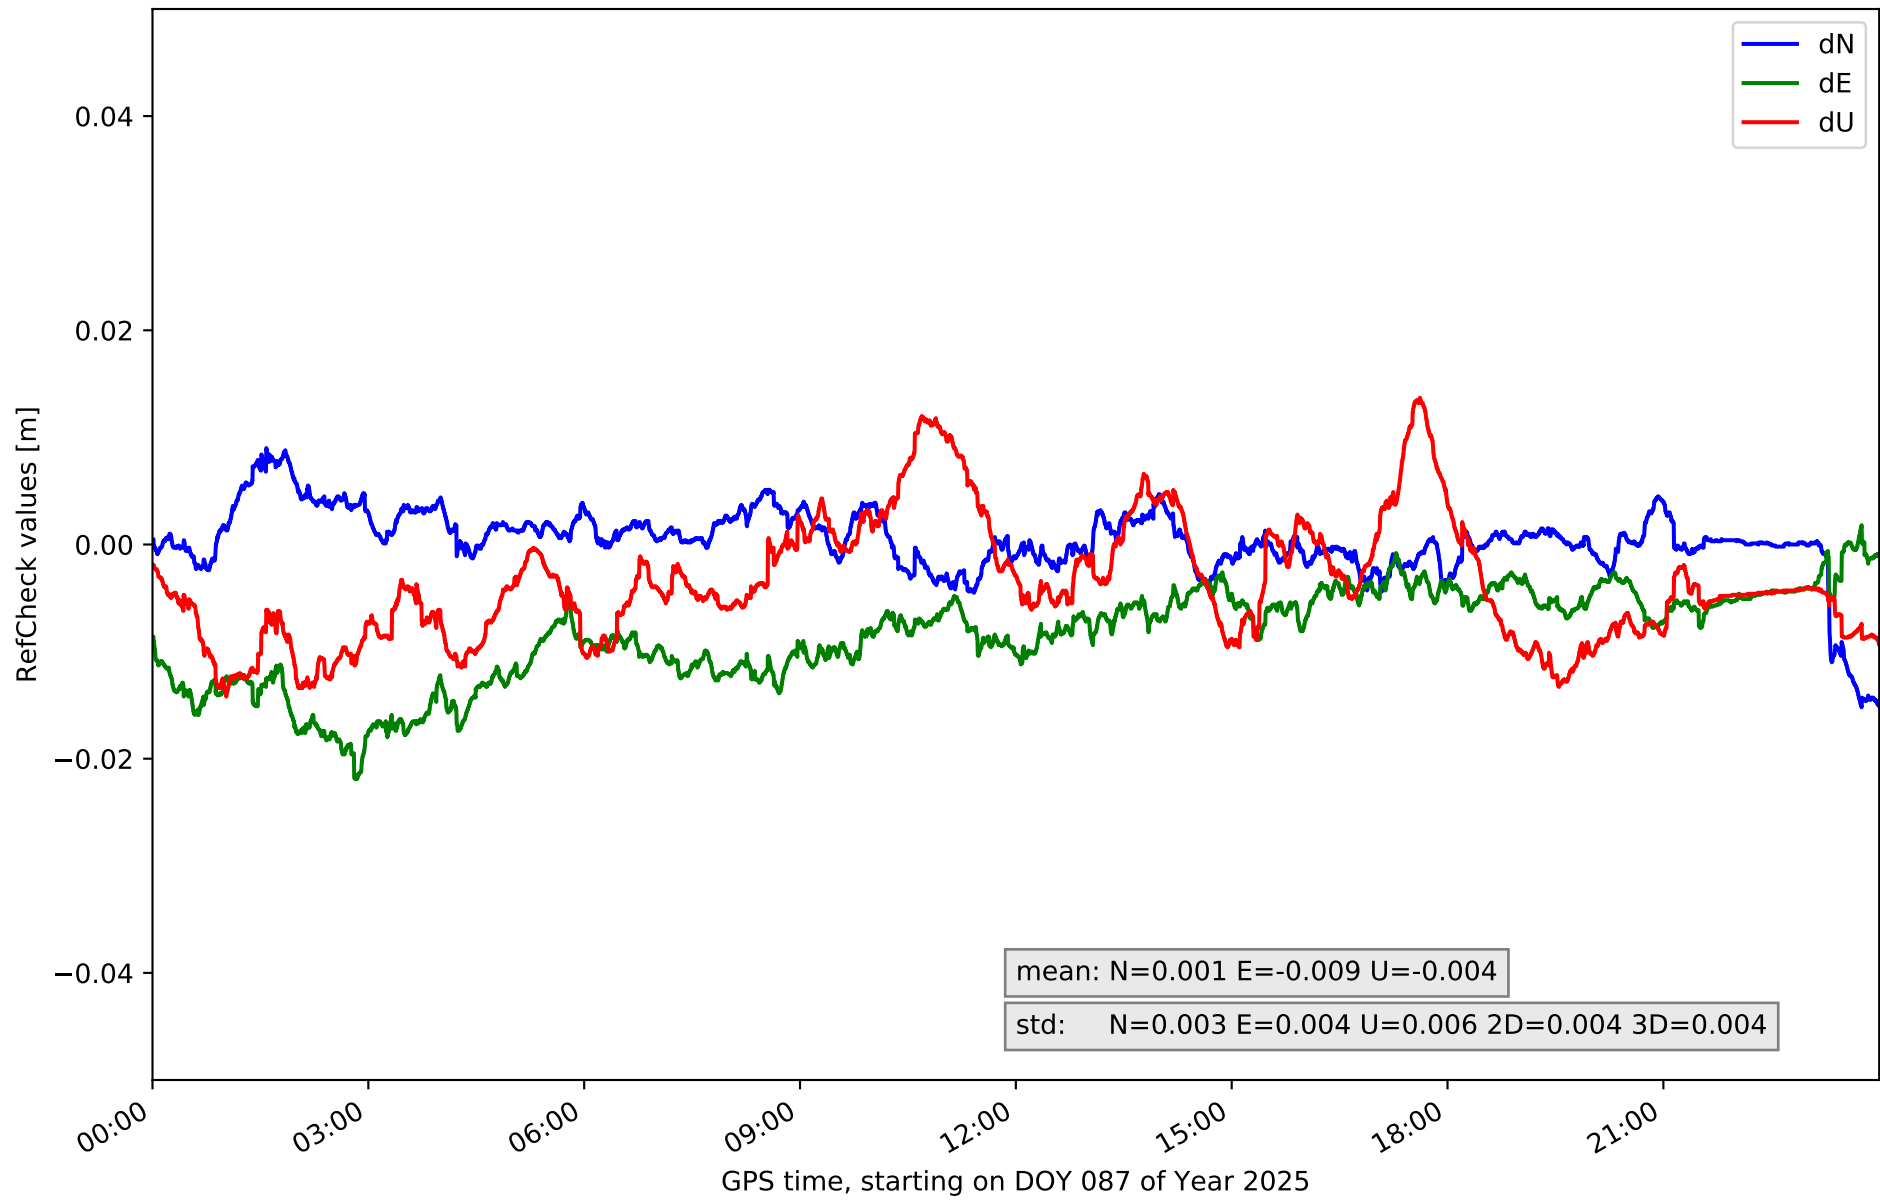


RefCheck for station LP01 in network N32T

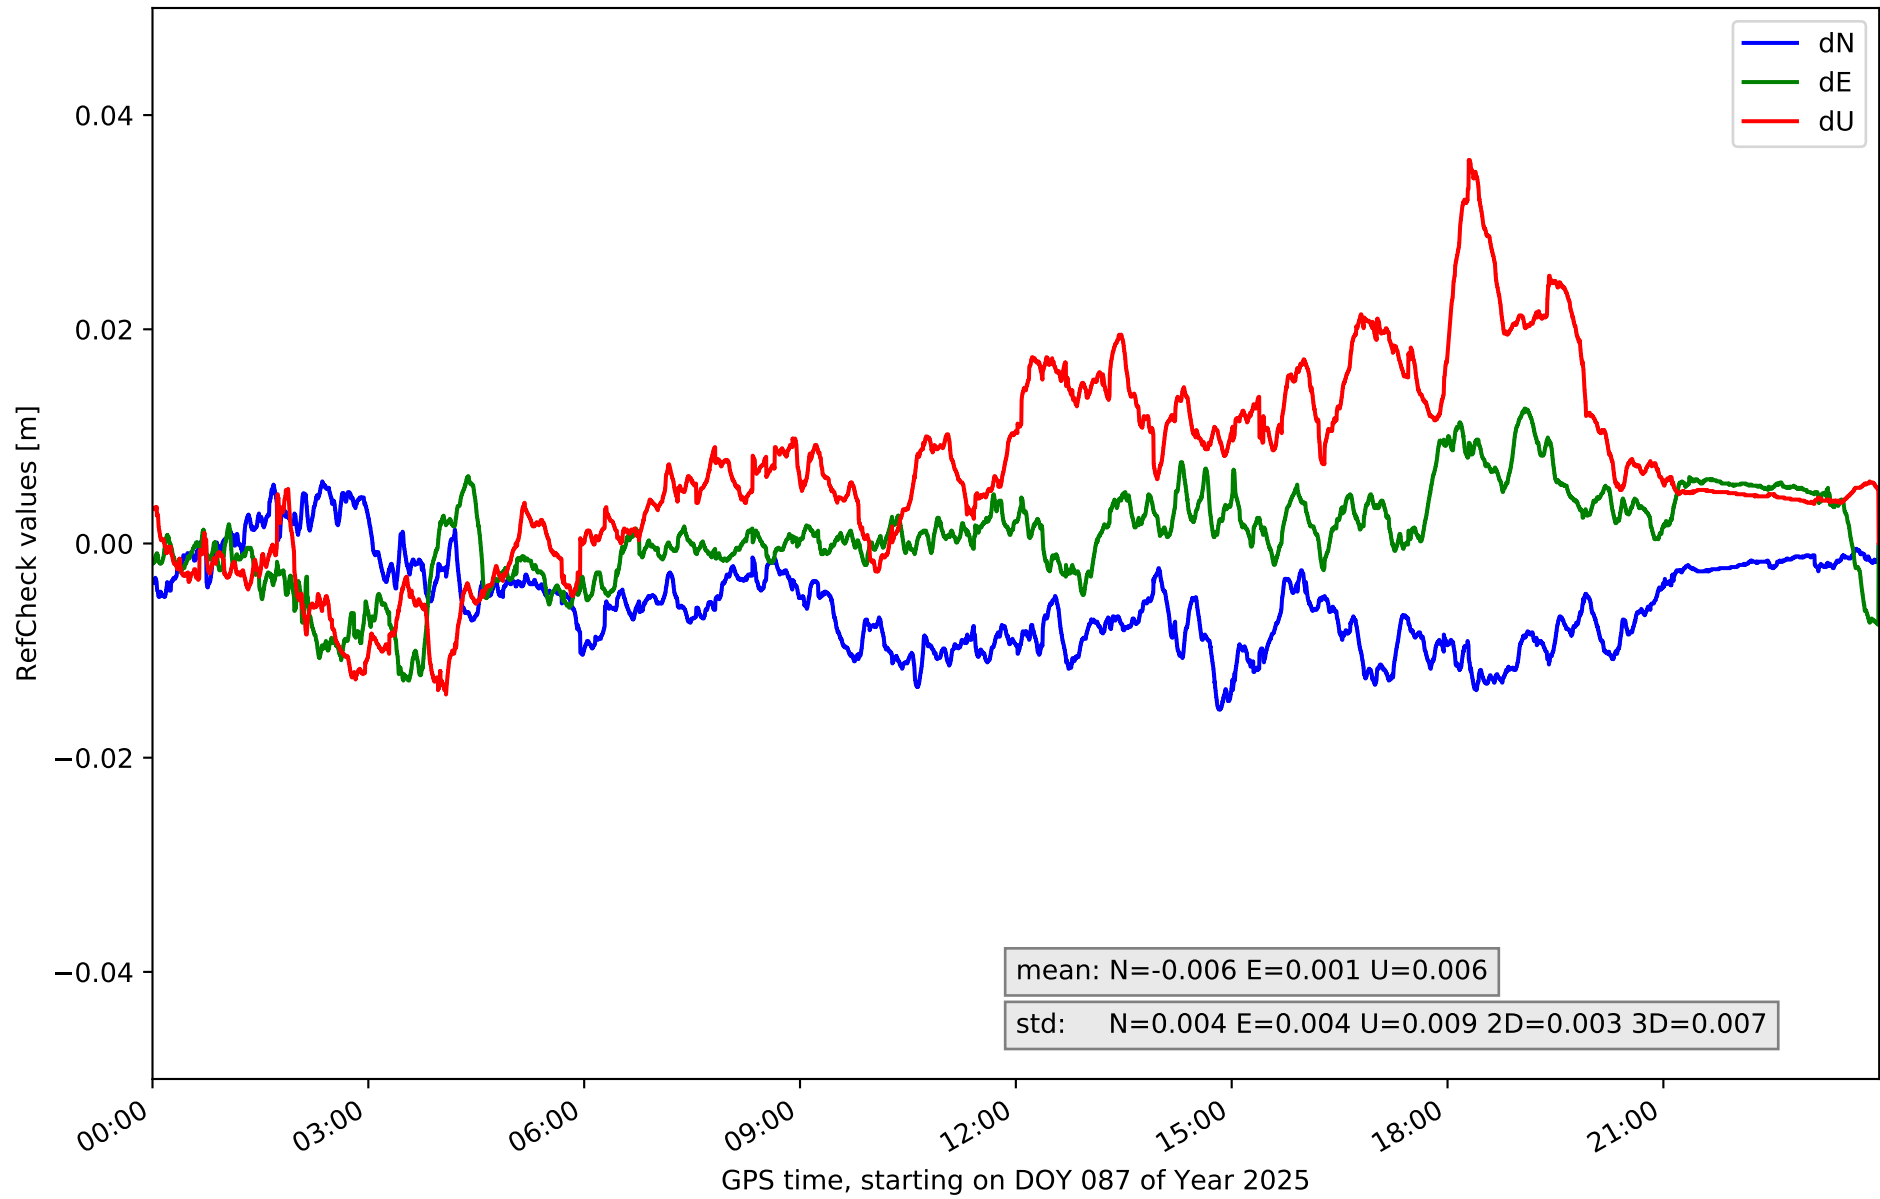


RefCheck for station LP03 in network N32T

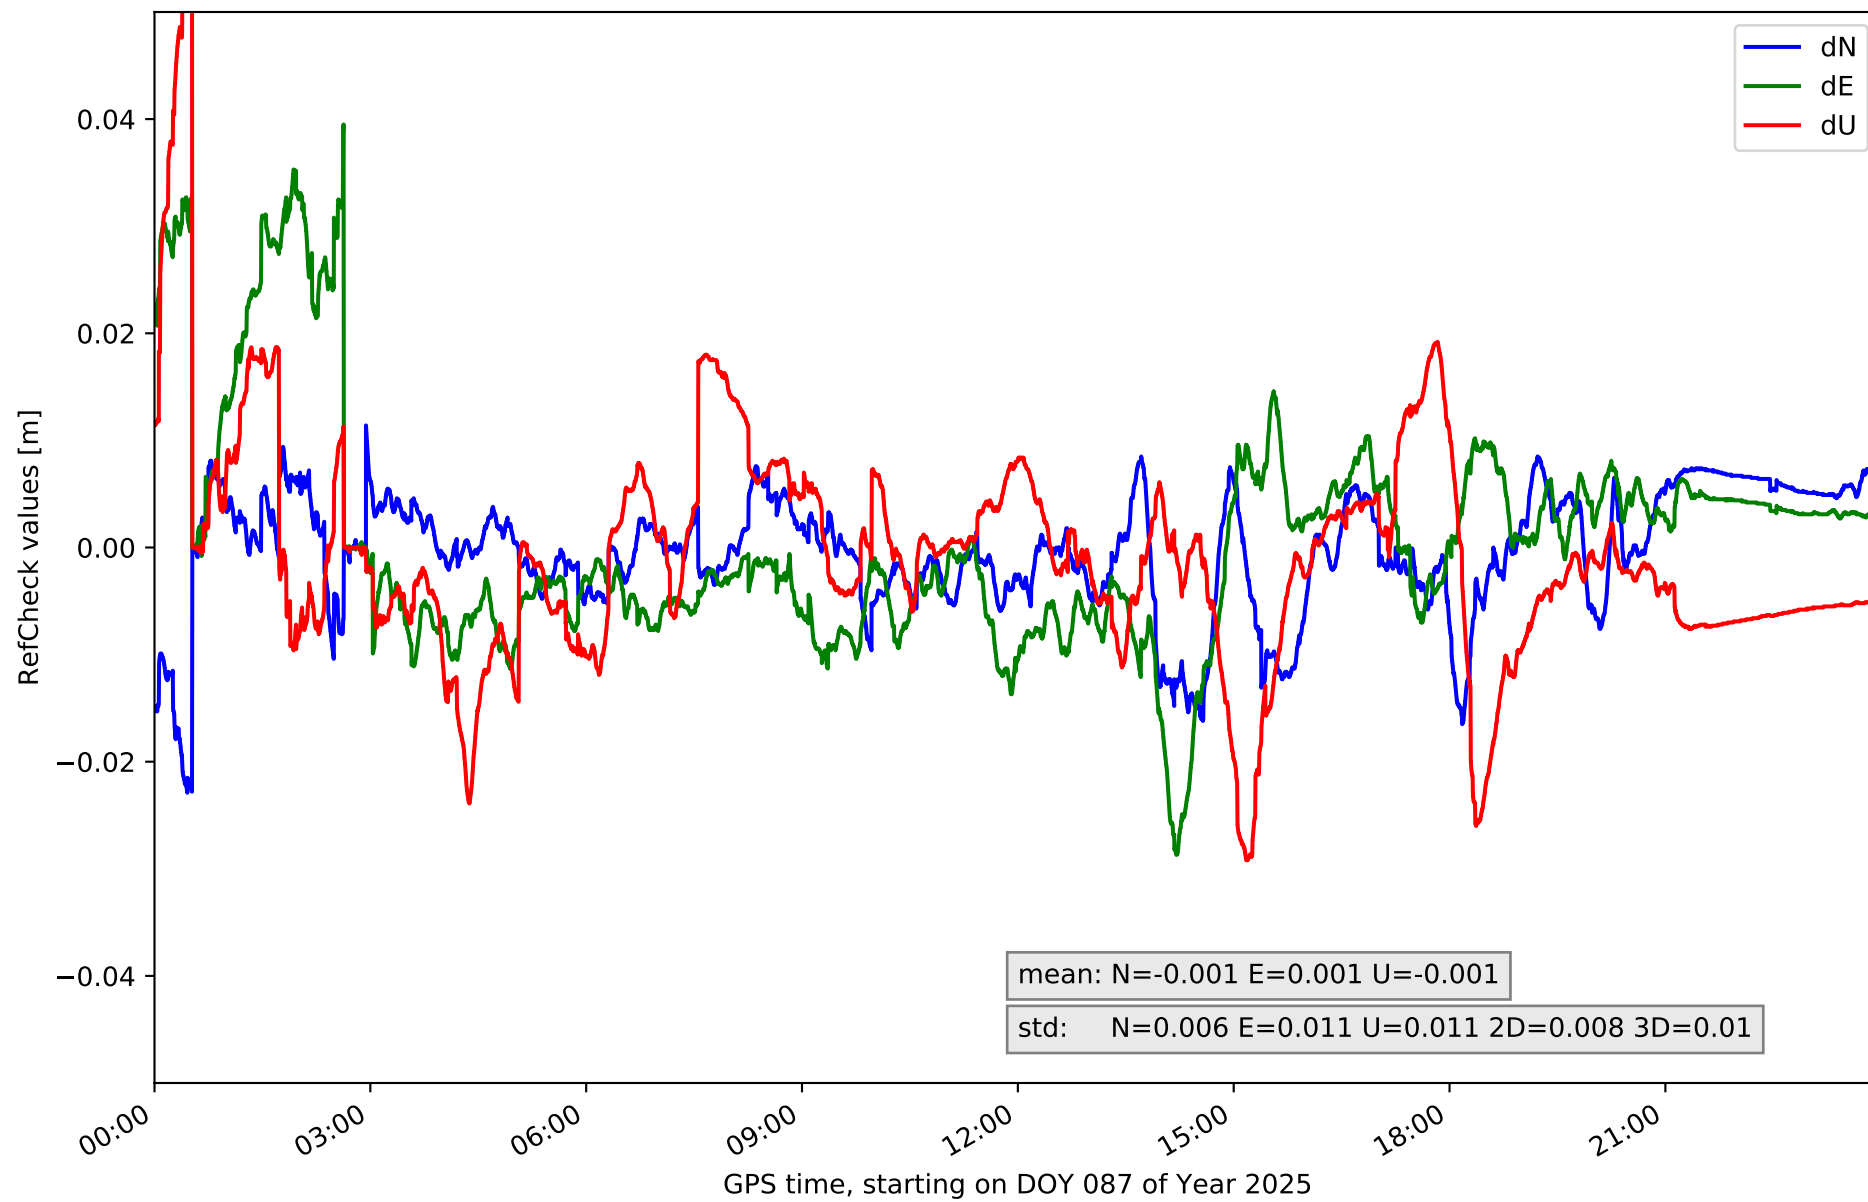


RefCheck for station LPAL in network N32T

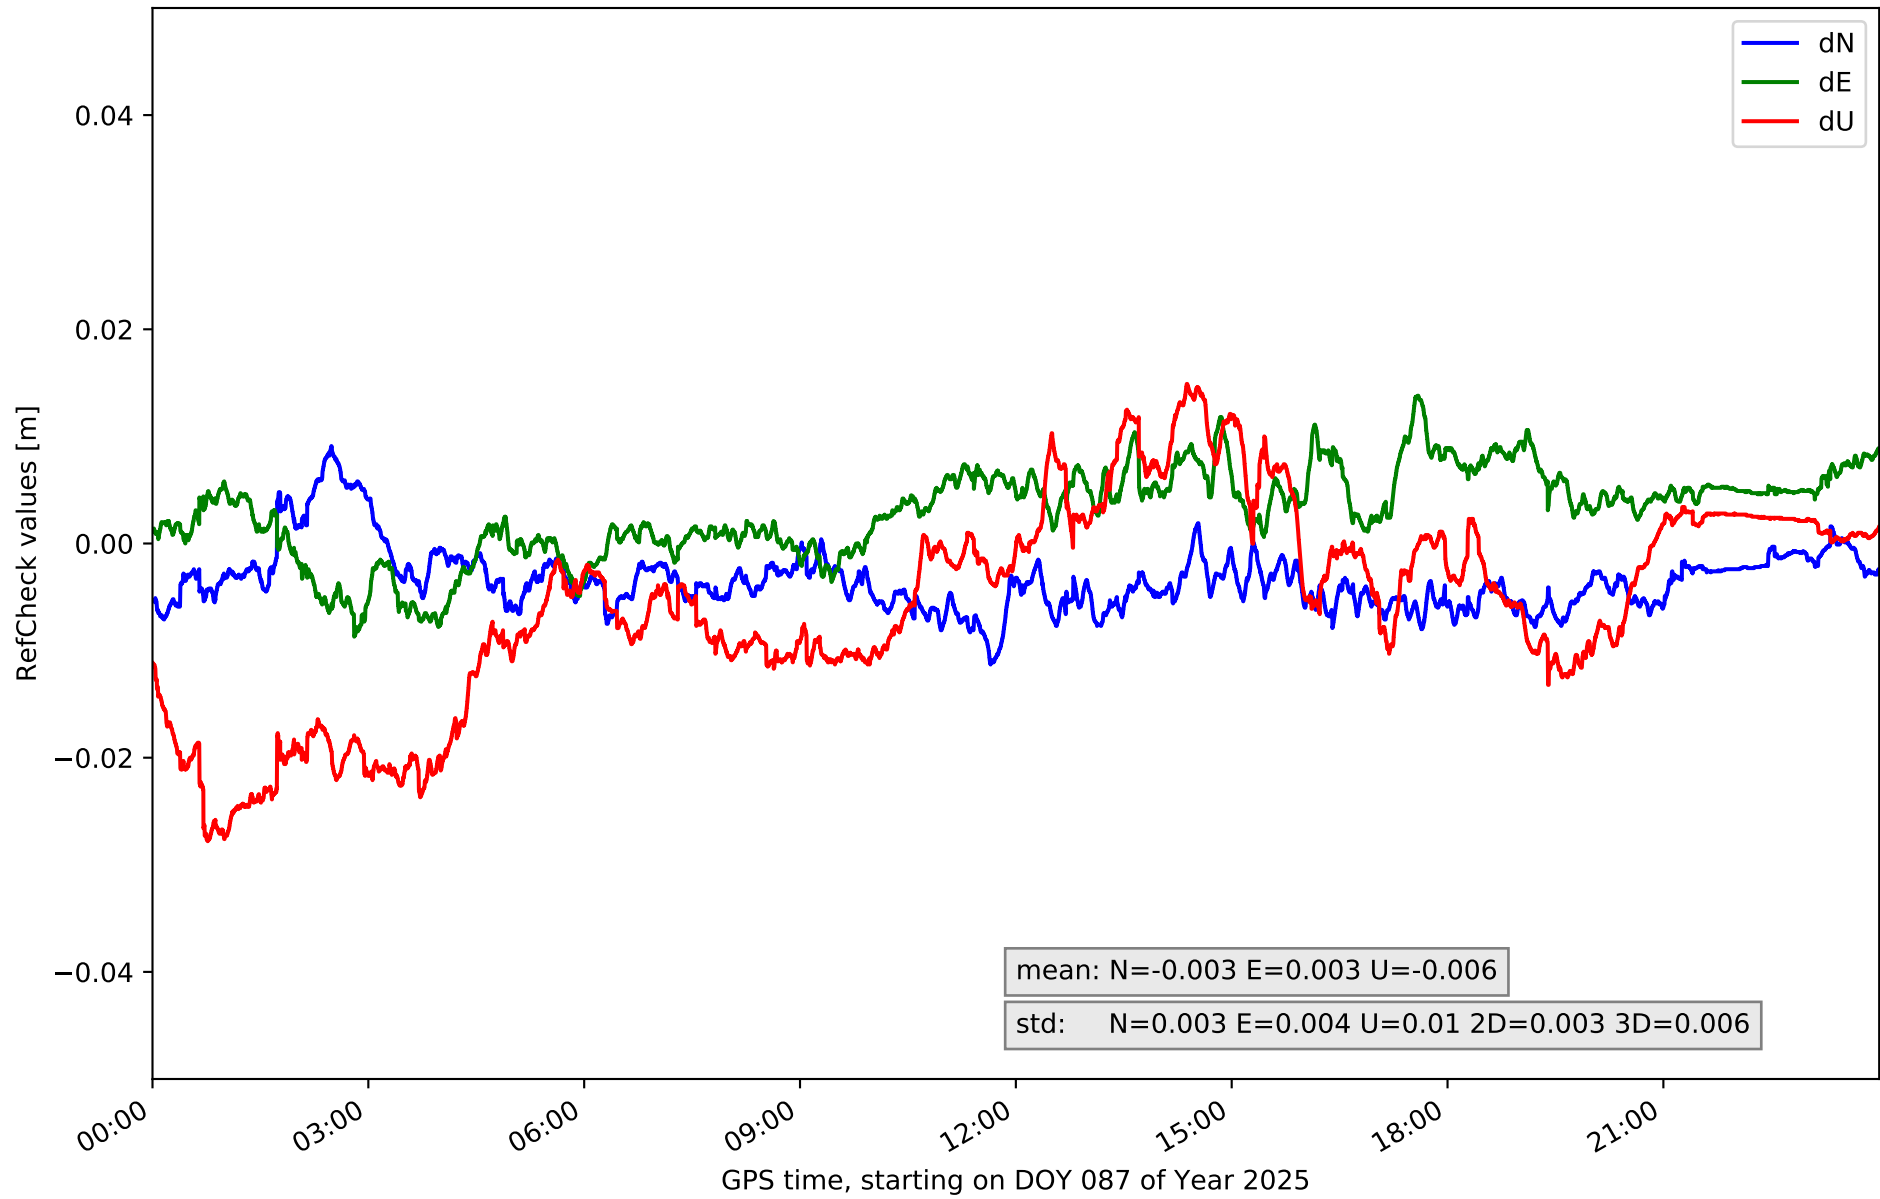


RefCheck for station LRES in network N32T

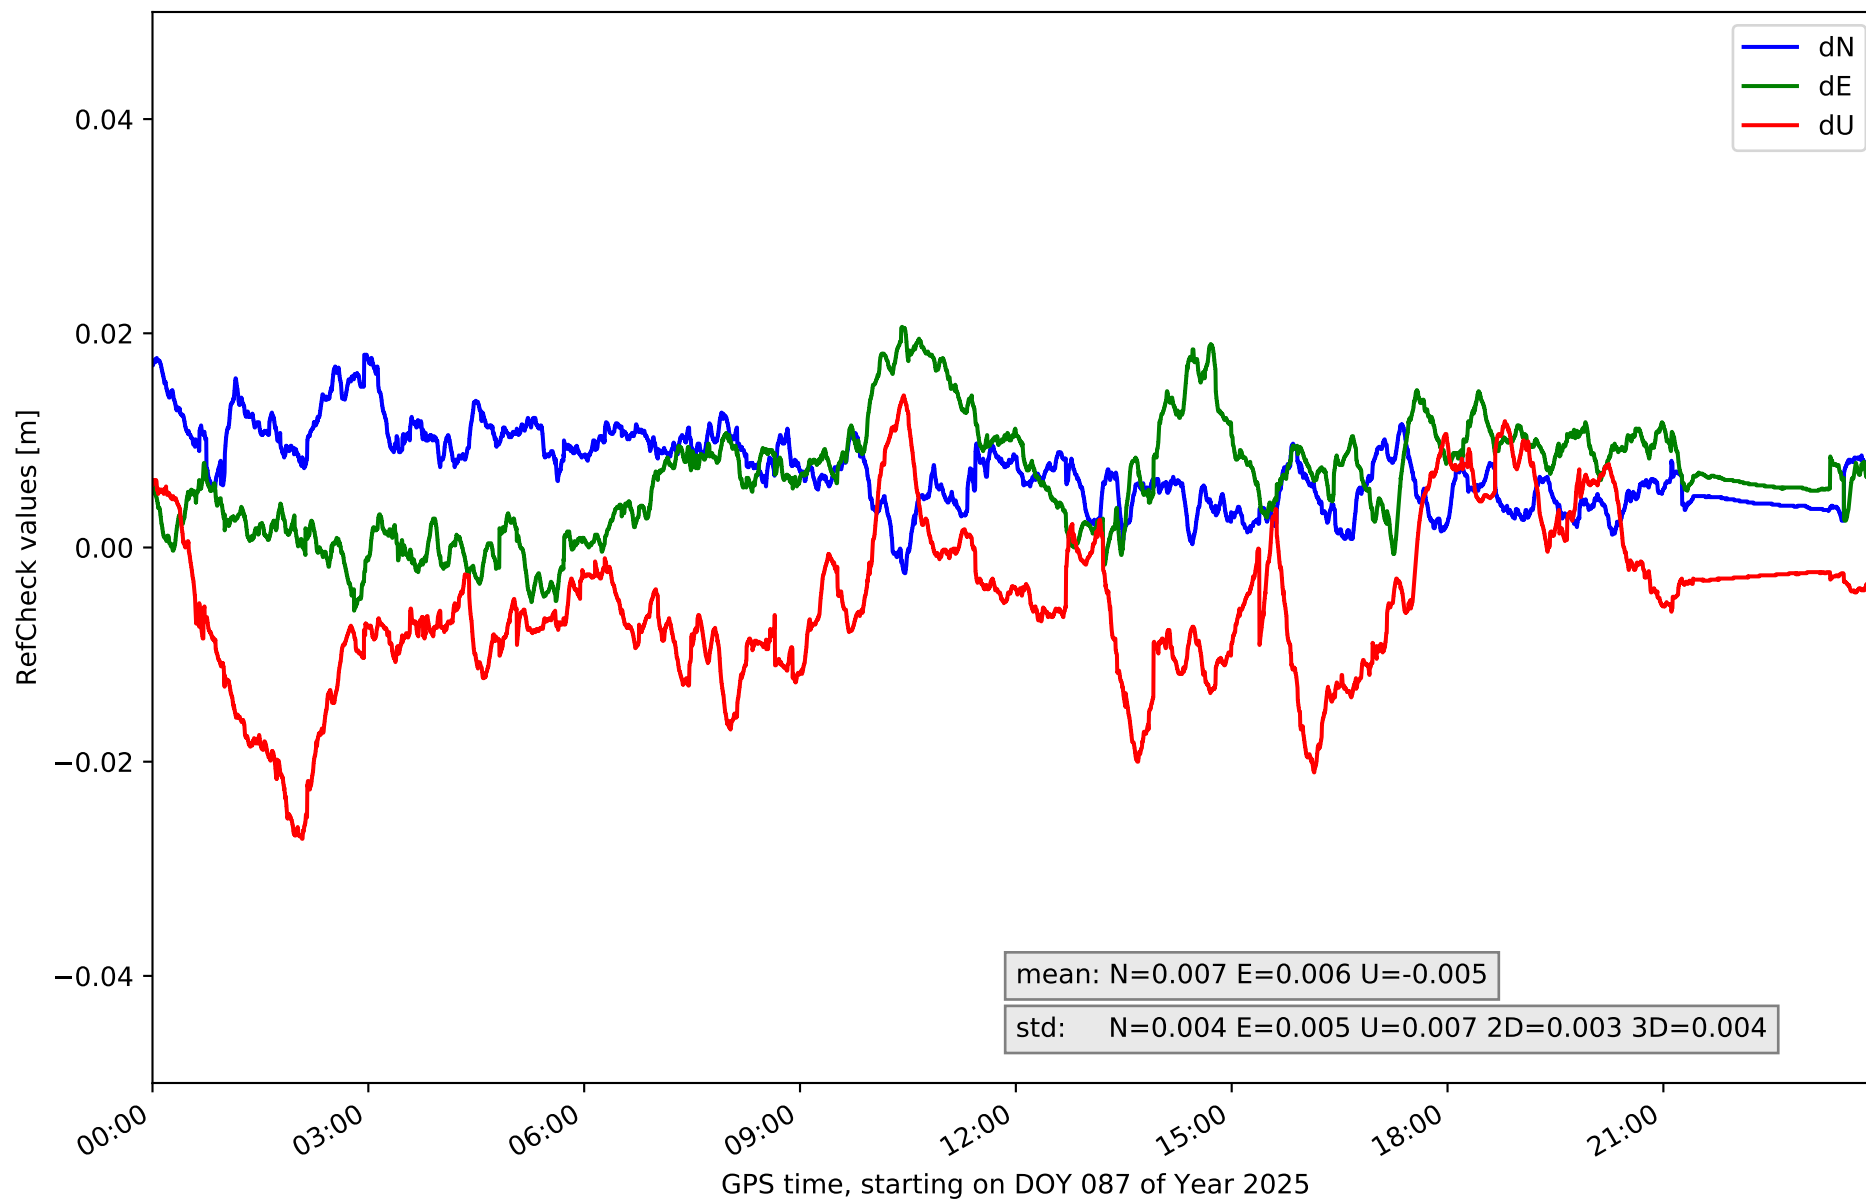


RefCheck for station TN01 in network N32T

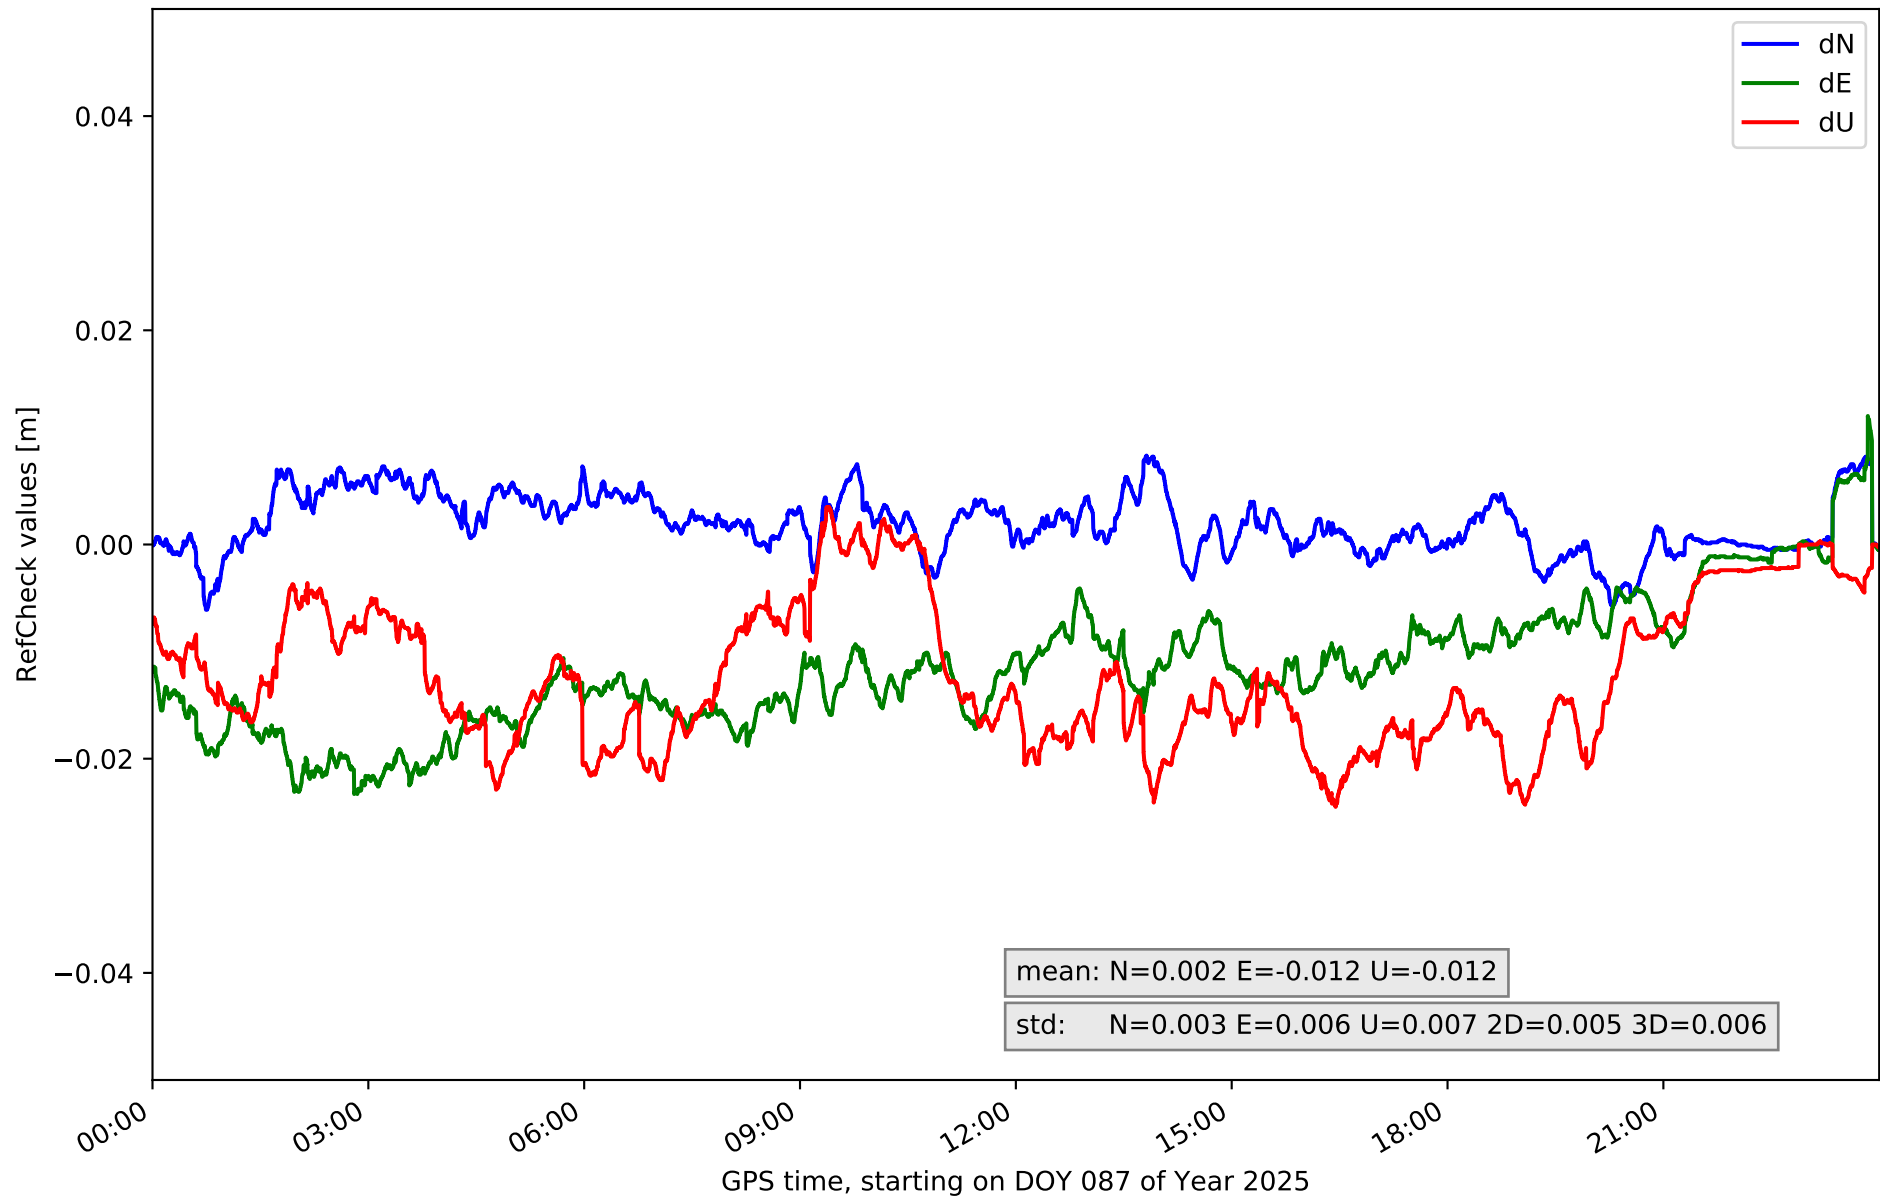


RefCheck for station TN02 in network N32T

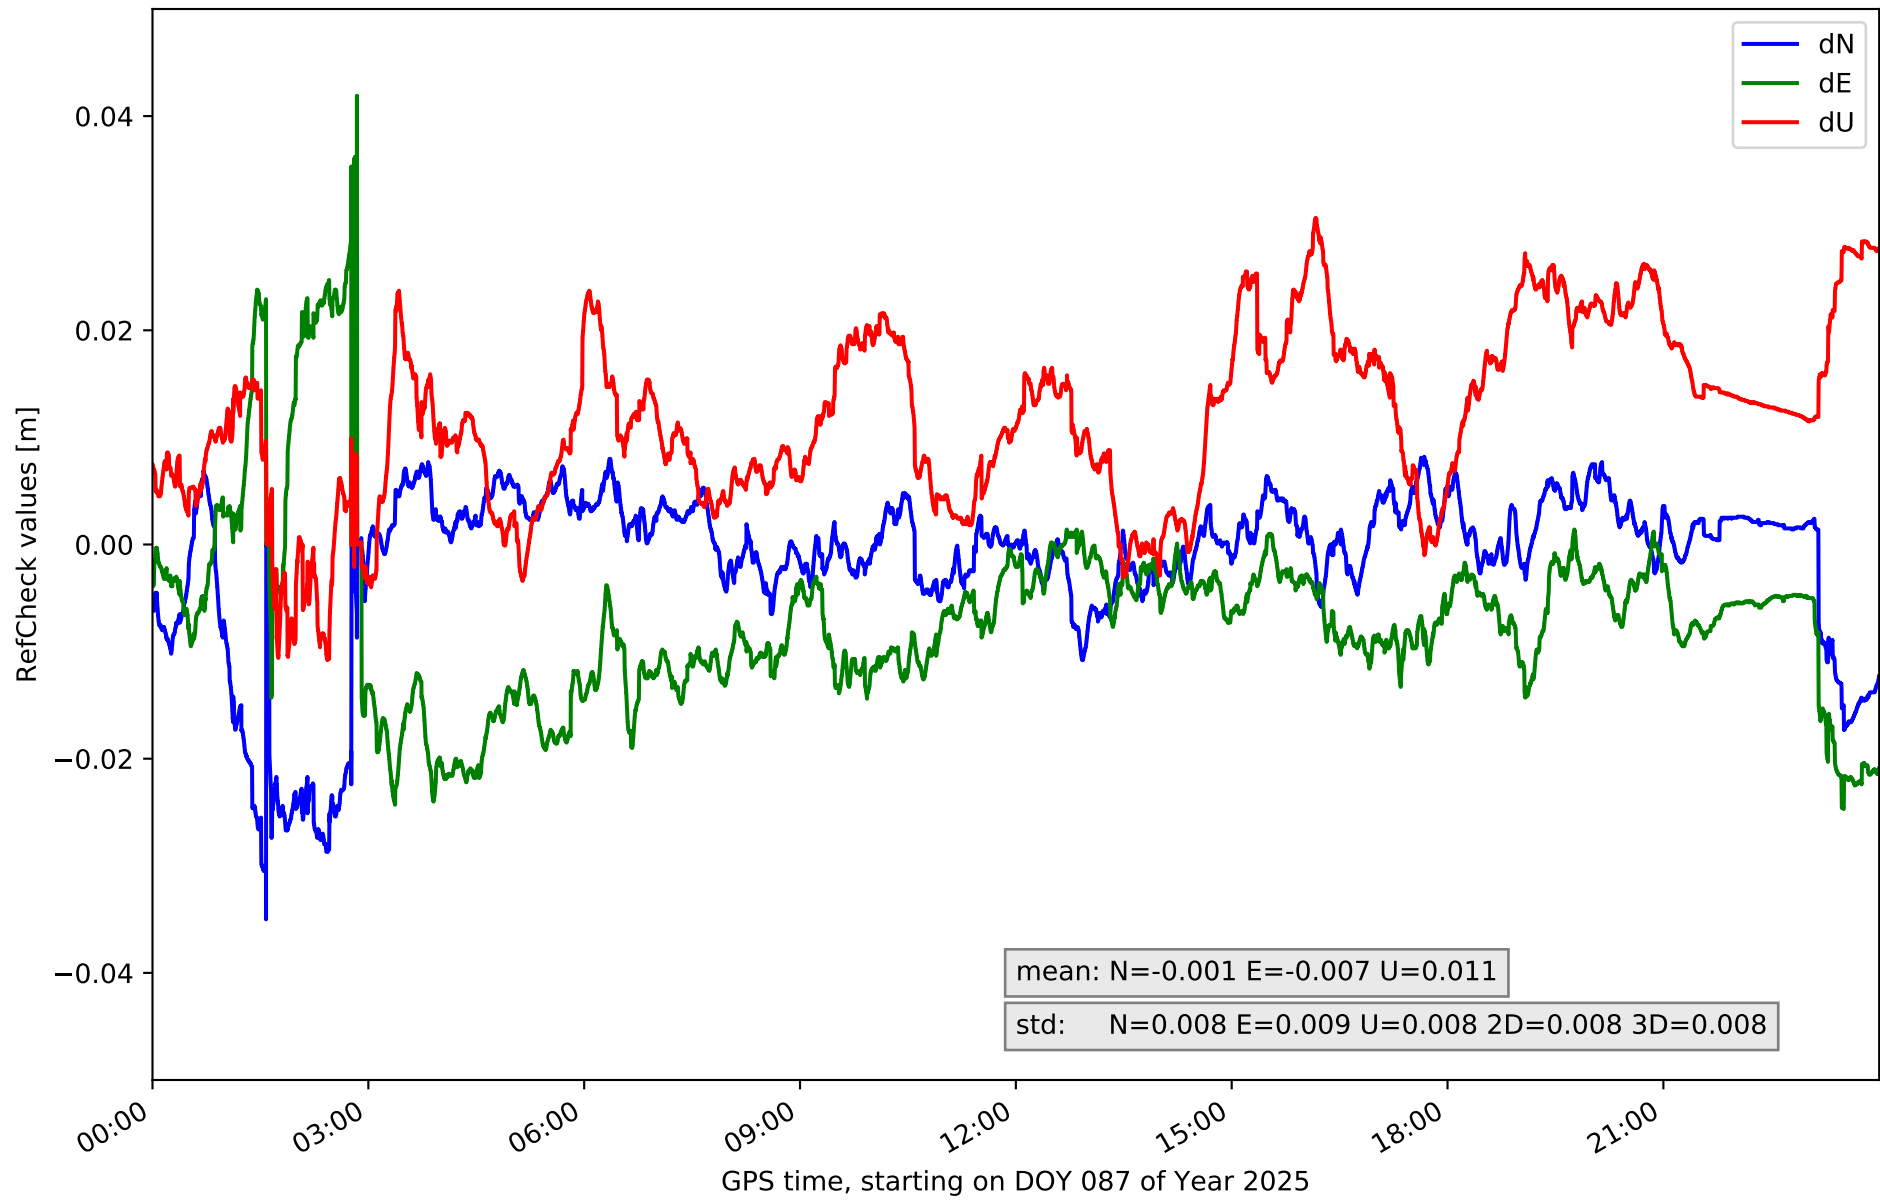


RefCheck for station TN03 in network N32T

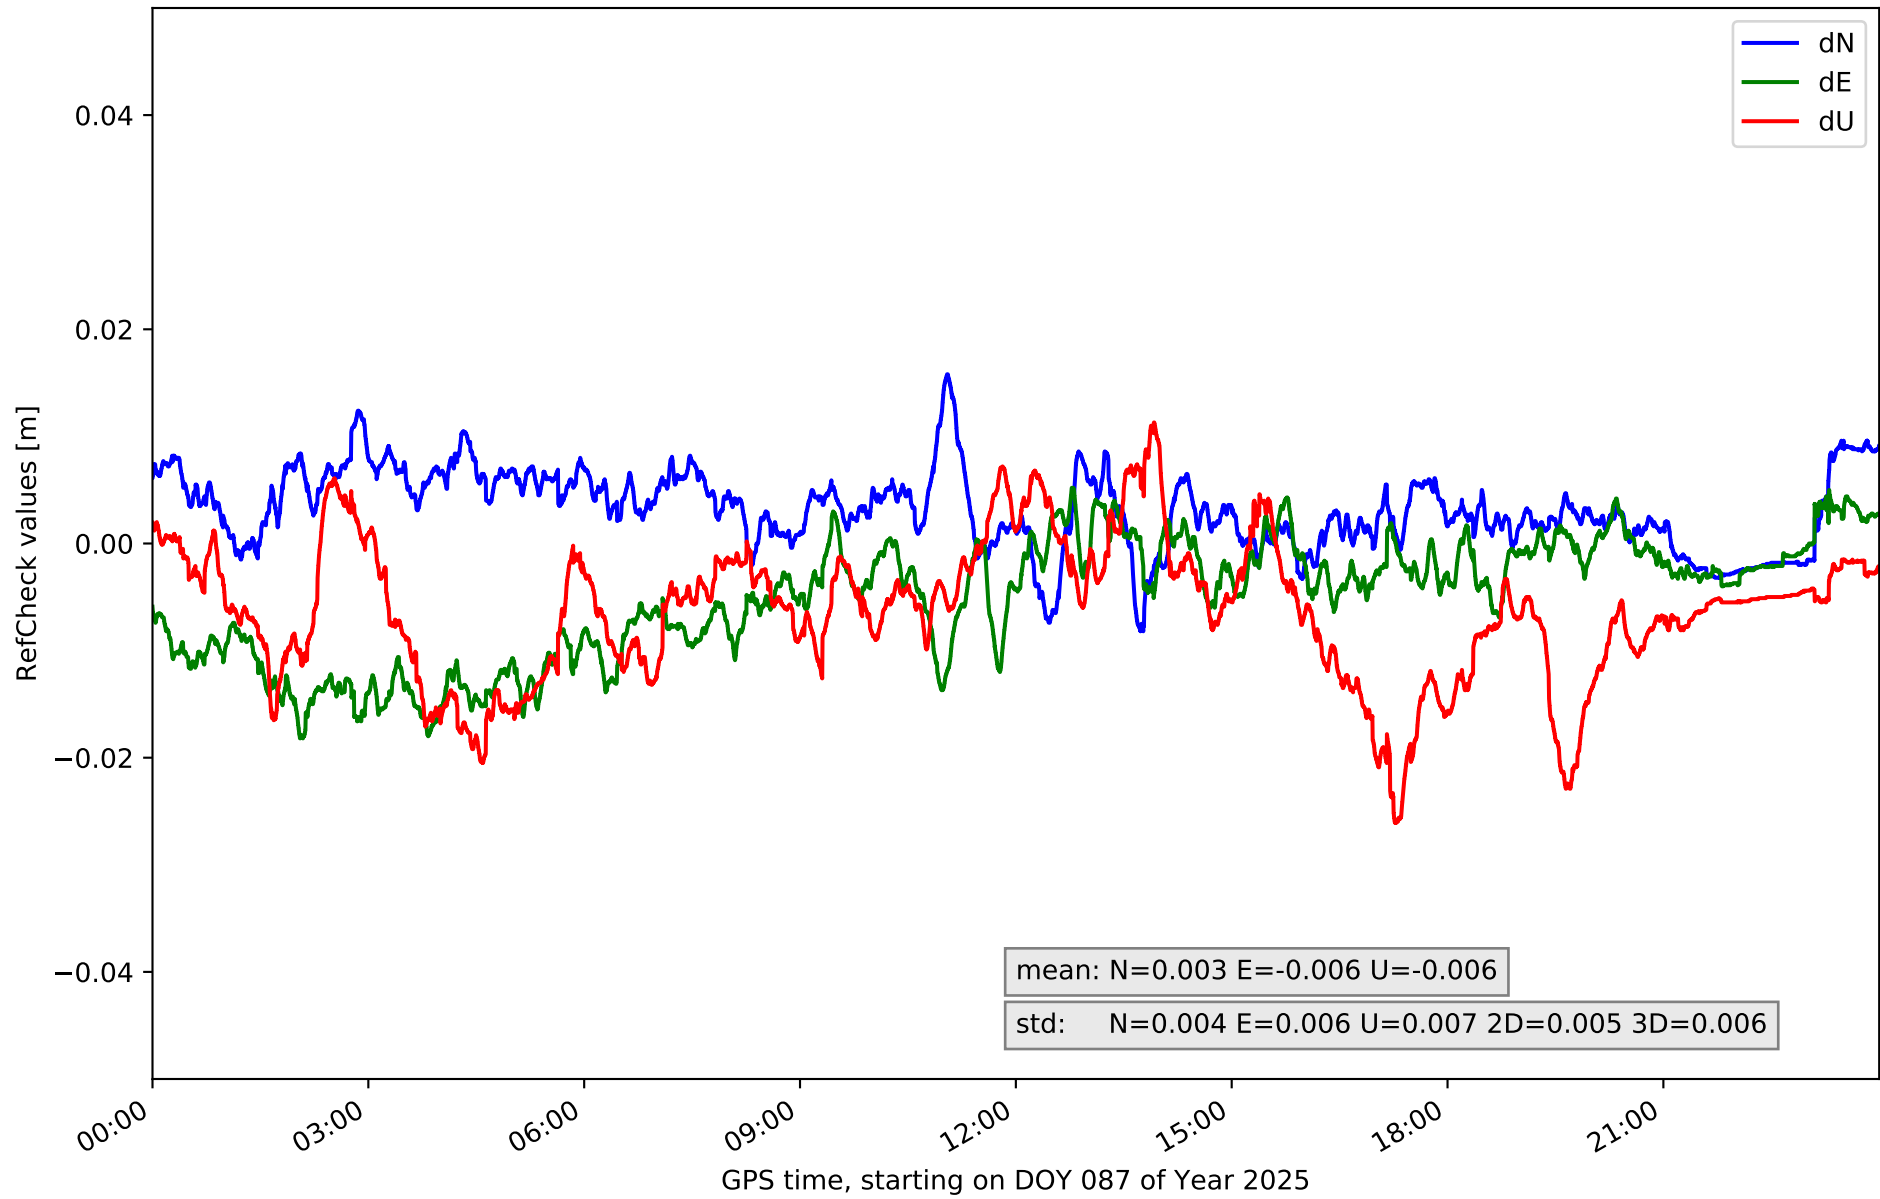


RefCheck for station TN06 in network N32T

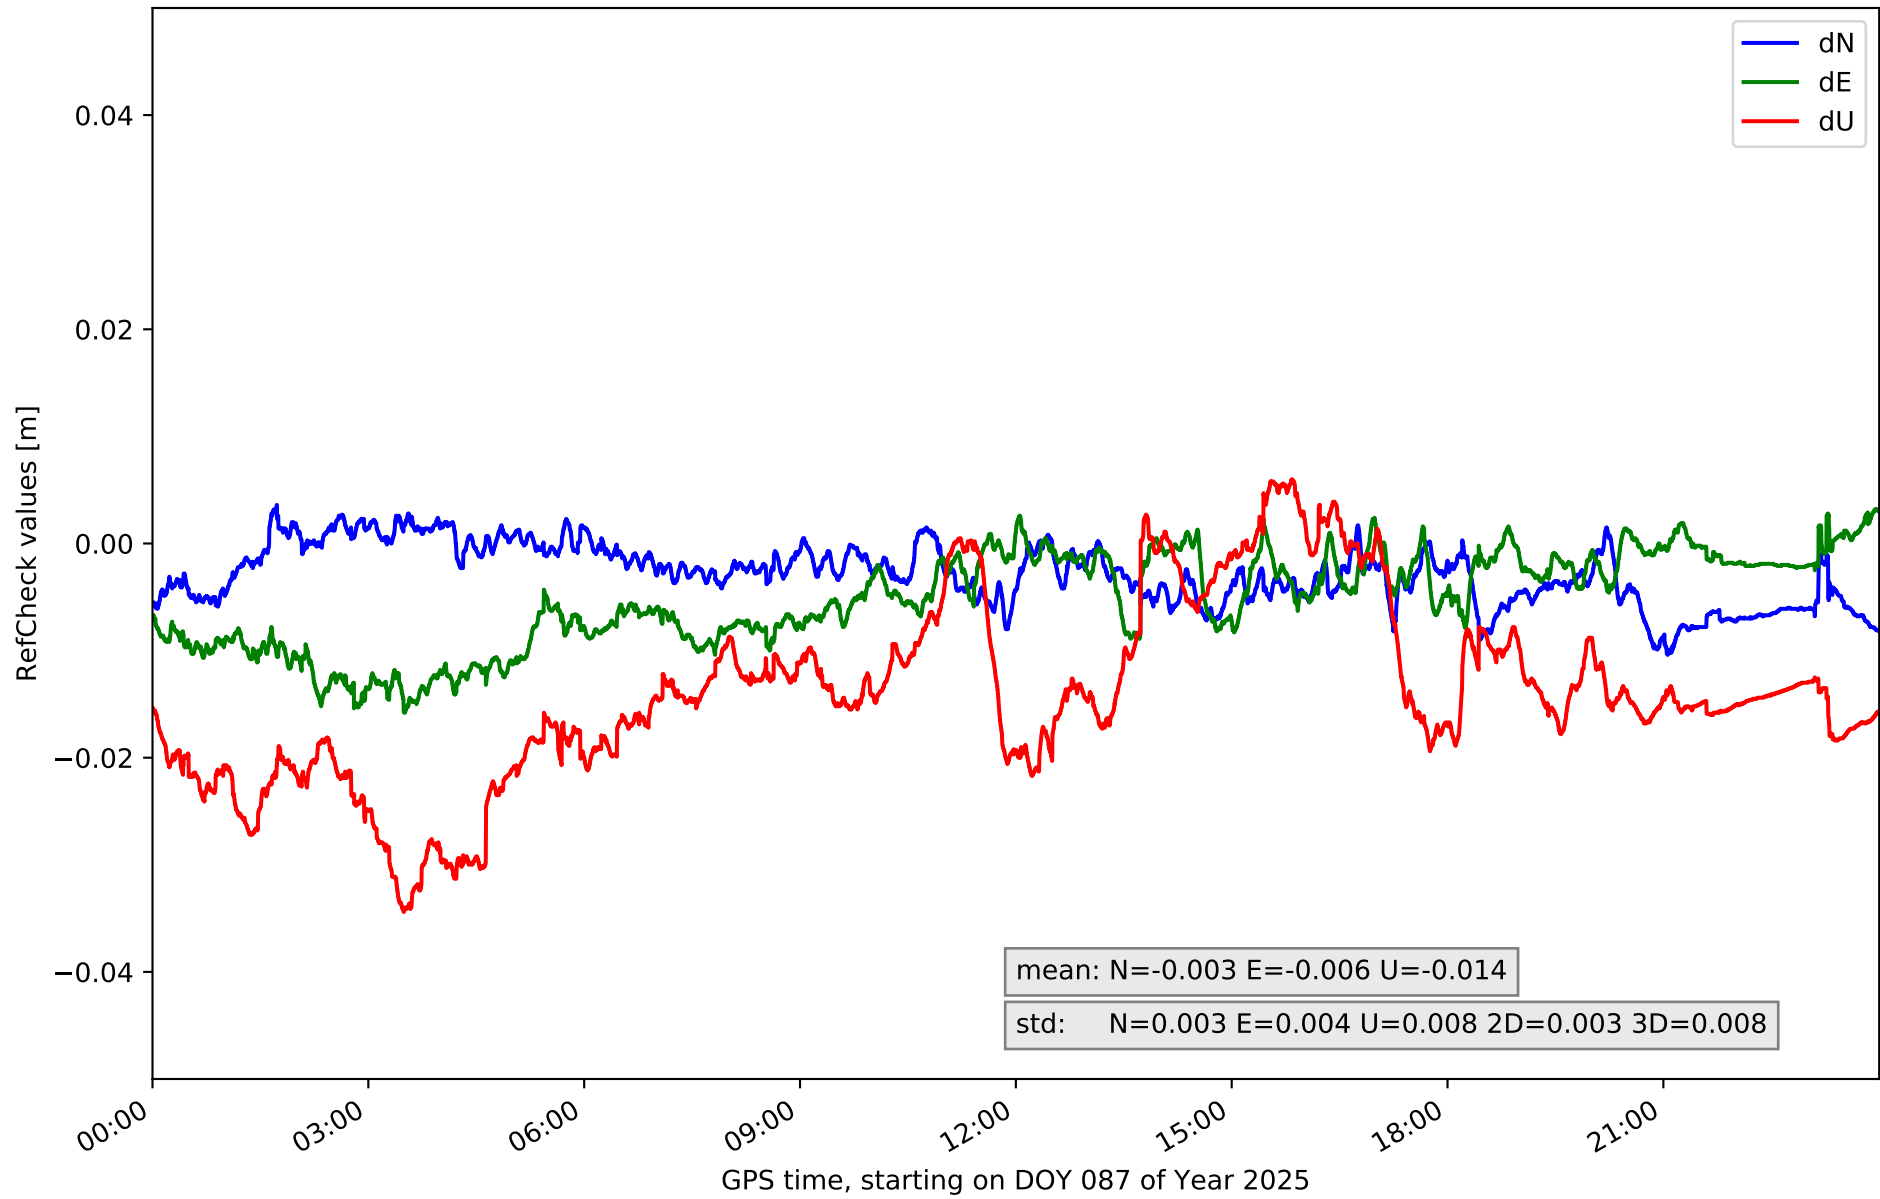

RefCheck for station TN09 in network N32T

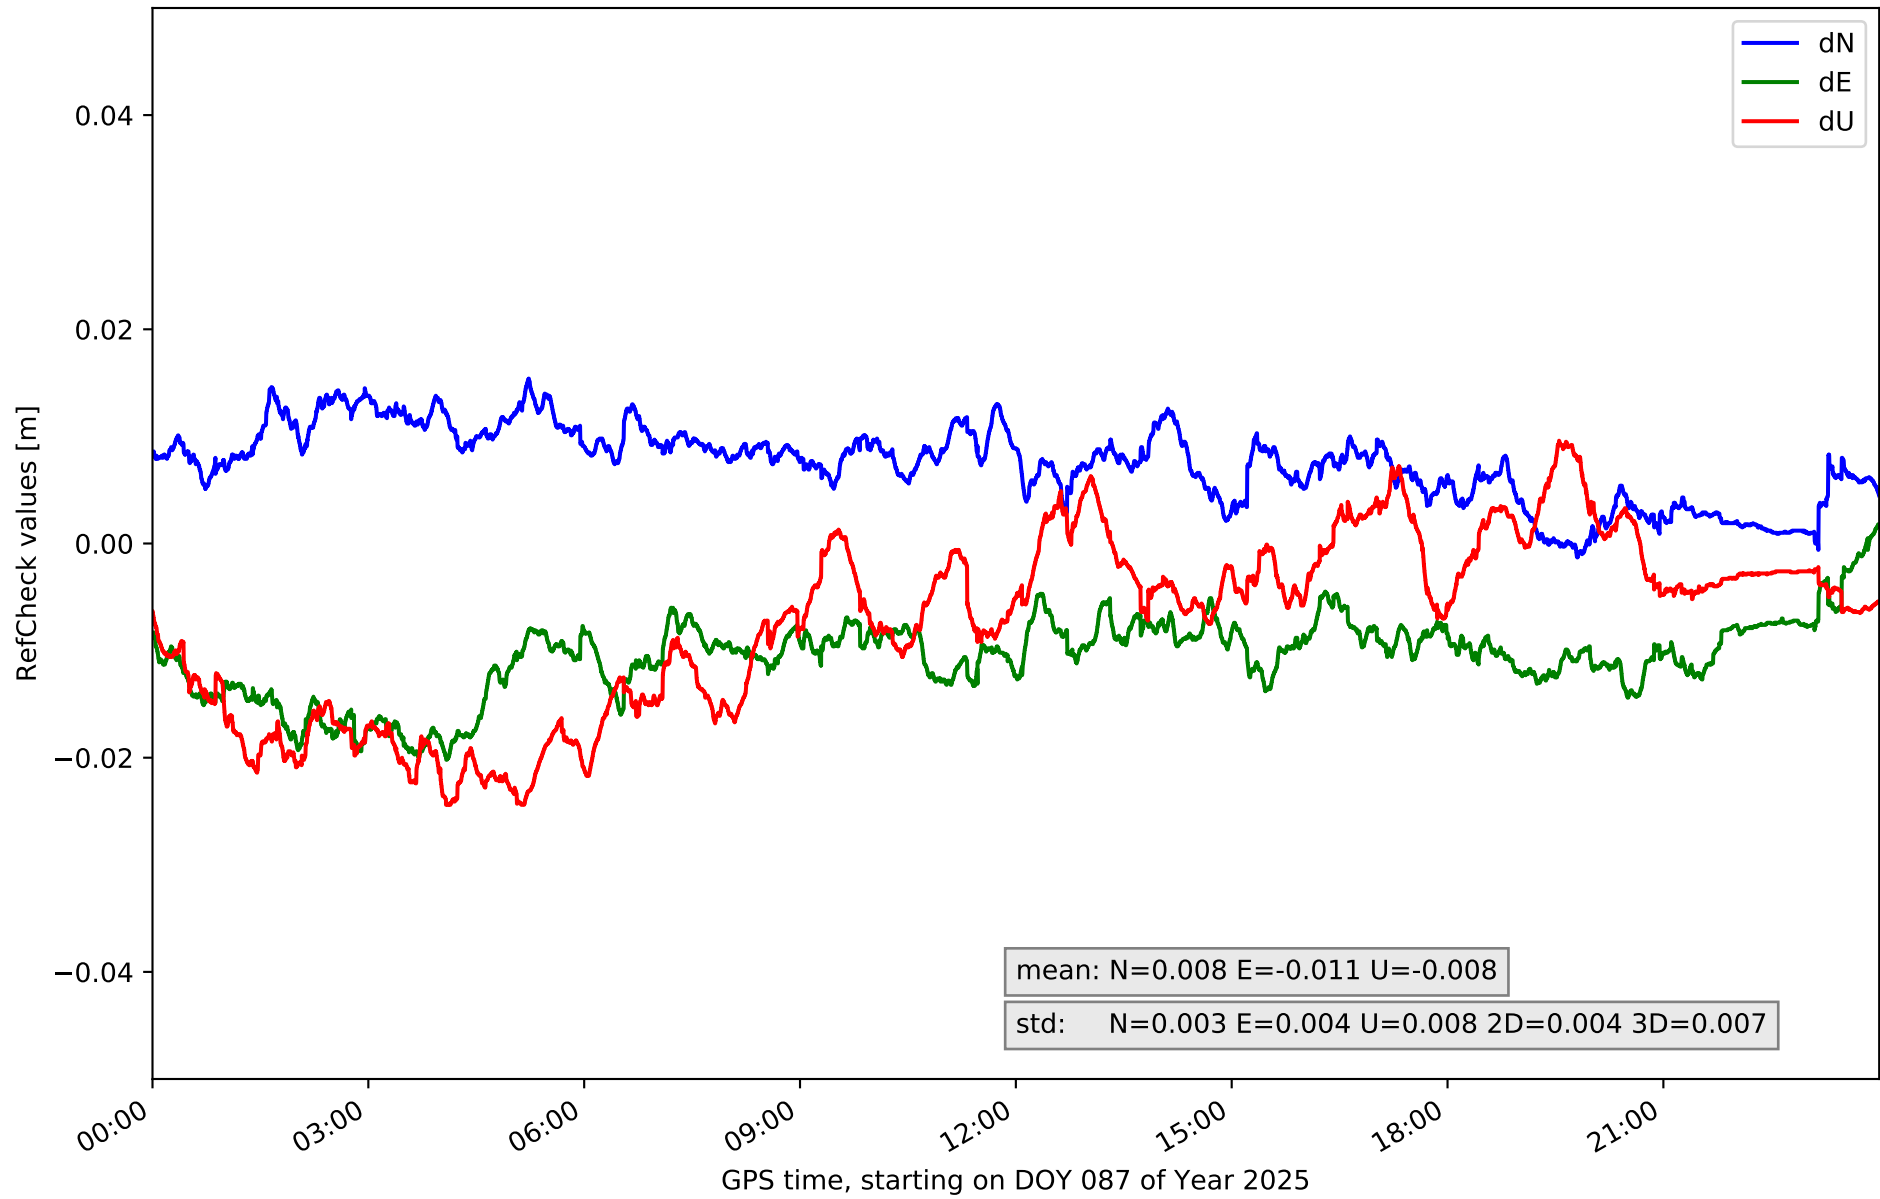

RefCheck for station TE11 in network N32T

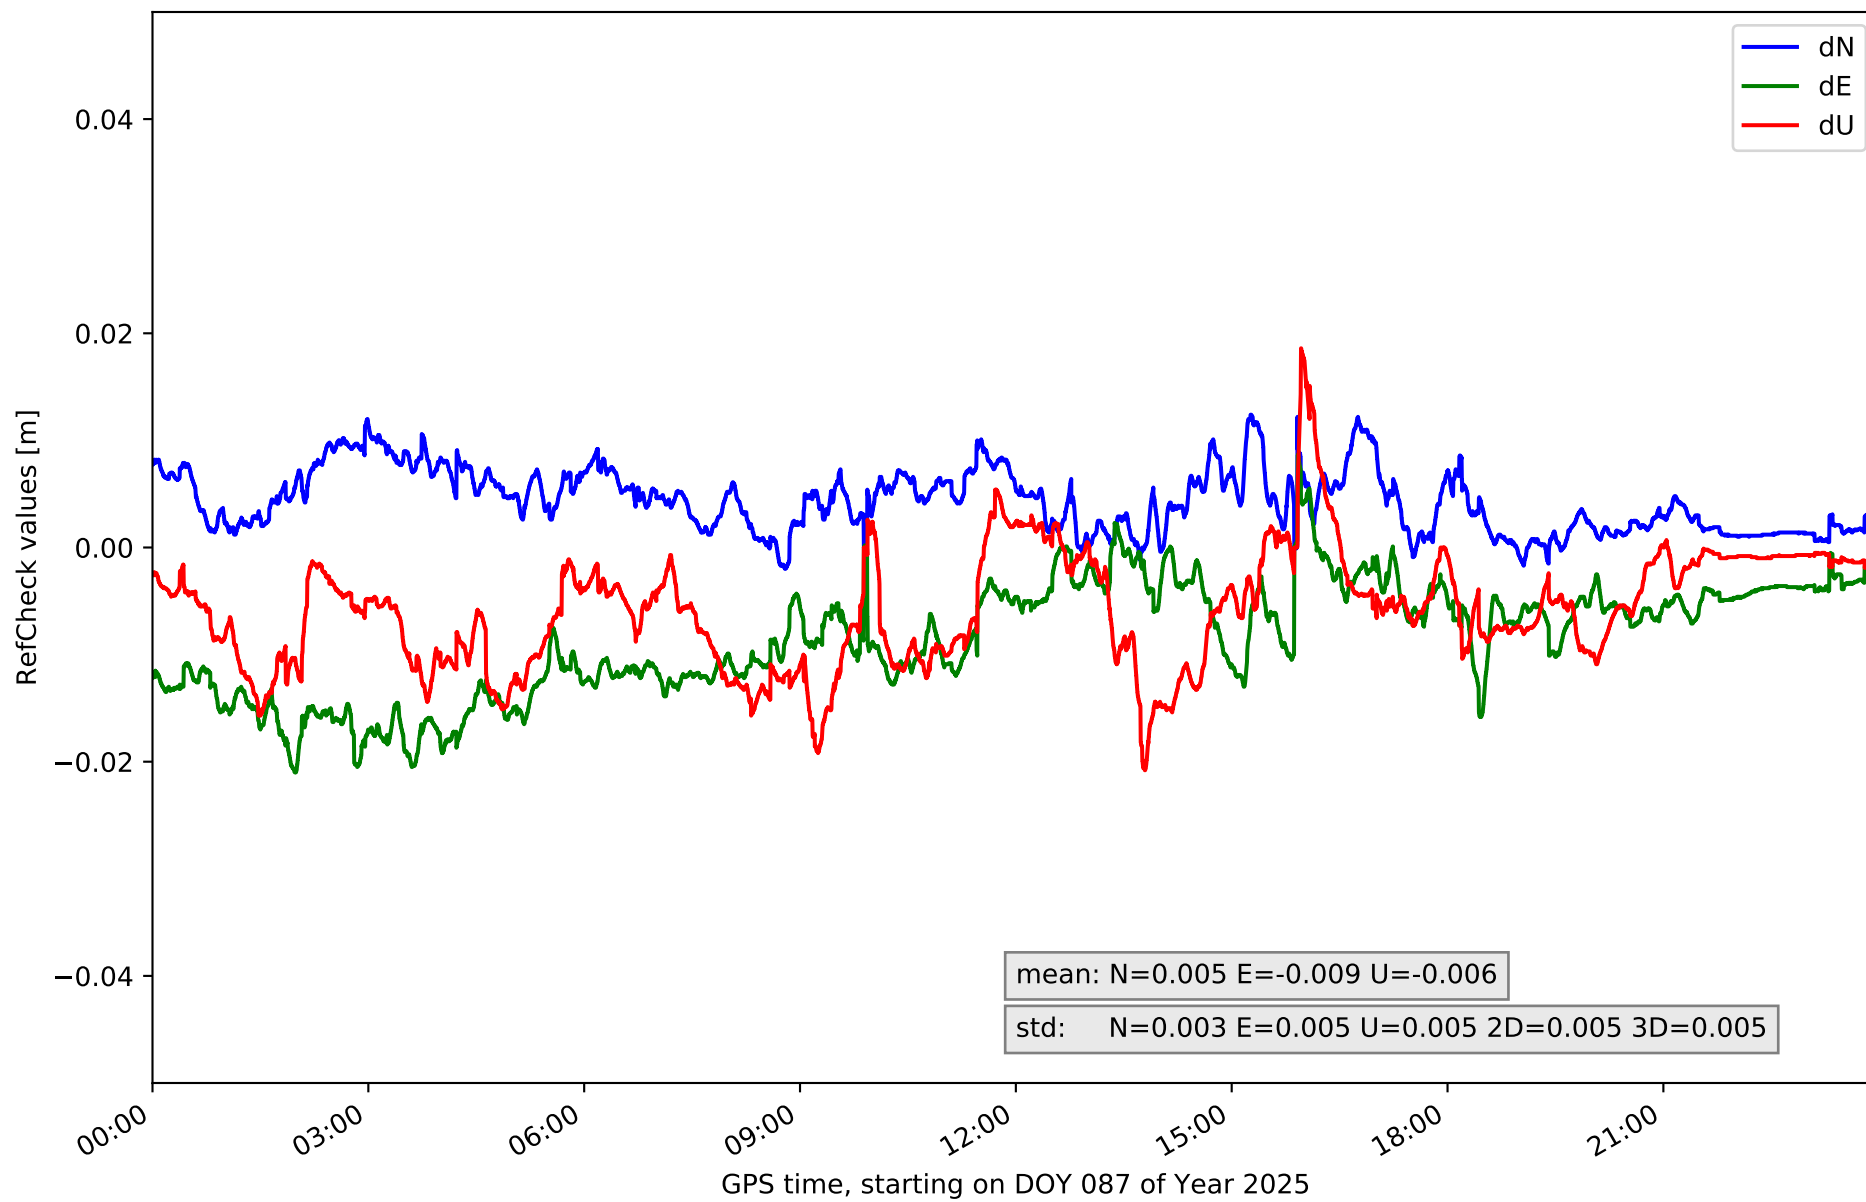

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.004	0.023	0.004	-0.033	0.018	0.007	-0.018	0.019	0.007	0.004	0.005	20188	53.4	1618	4.3
EH02	-0.009	0.016	0.005	-0.005	0.027	0.006	-0.008	0.026	0.008	0.004	0.006	20137	53.3	16349	43.3
GOM1	-0.025	0.008	0.006	-0.023	0.036	0.009	-0.029	0.07	0.022	0.006	0.015	24019	63.5	12264	32.4
IZAN	-0.015	0.009	0.003	-0.022	0.002	0.004	-0.014	0.014	0.006	0.004	0.004	14955	39.6	2042	5.4
LP01	-0.015	0.006	0.004	-0.013	0.013	0.004	-0.014	0.036	0.009	0.003	0.007	9465	25.0	4125	10.9
LP03	-0.023	0.011	0.006	-0.029	0.04	0.011	-0.029	0.059	0.011	0.008	0.01	8835	23.4	6148	16.3
LPAL	-0.011	0.009	0.003	-0.009	0.014	0.004	-0.028	0.015	0.01	0.003	0.006	3289	8.7	5565	14.7
LRES	-0.002	0.018	0.004	-0.006	0.021	0.005	-0.027	0.014	0.007	0.003	0.004	23884	63.2	4488	11.9
TN01	-0.006	0.008	0.003	-0.023	0.012	0.006	-0.025	0.004	0.007	0.005	0.006	26847	71.0	19301	51.1
TN02	-0.035	0.008	0.008	-0.025	0.042	0.009	-0.011	0.03	0.008	0.008	0.008	17145	45.4	14323	37.9
TN03	-0.008	0.016	0.004	-0.018	0.005	0.006	-0.026	0.011	0.007	0.005	0.006	11992	31.7	4498	11.9
TN06	-0.01	0.004	0.003	-0.016	0.003	0.004	-0.034	0.006	0.008	0.003	0.008	8212	21.7	10764	28.5
TN09	-0.001	0.015	0.003	-0.02	0.002	0.004	-0.024	0.01	0.008	0.004	0.007	32359	85.6	12101	32.0
TE11	-0.002	0.012	0.003	-0.021	0.009	0.005	-0.021	0.019	0.005	0.005	0.005	19995	52.9	4797	12.7
Mean	-0.012	0.012	0.004	-0.019	0.017	0.006	-0.022	0.024	0.009	0.005	0.007	17237.3	45.6	8455.9	22.4
Min/Max	-0.035	0.023	0.008	-0.033	0.042	0.011	-0.034	0.07	0.022	0.008	0.015	32359	85.6	19301	51.1

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	85.9	85.6	87.7	86.9	87.6
considering satellites with dual-frequency fixed	85.4	84.6	85.2	85.2	87.4
considering all signals separately	85.5	84.6	85.2	85.6	87.3