

summary for network NT32

timeperiod chosen: from 2025-03-29-00:00:00 until 2025-03-29-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.3 seconds


average fixing percentage with threshold set to 0.3: 76.5 percent

stations available: 14 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

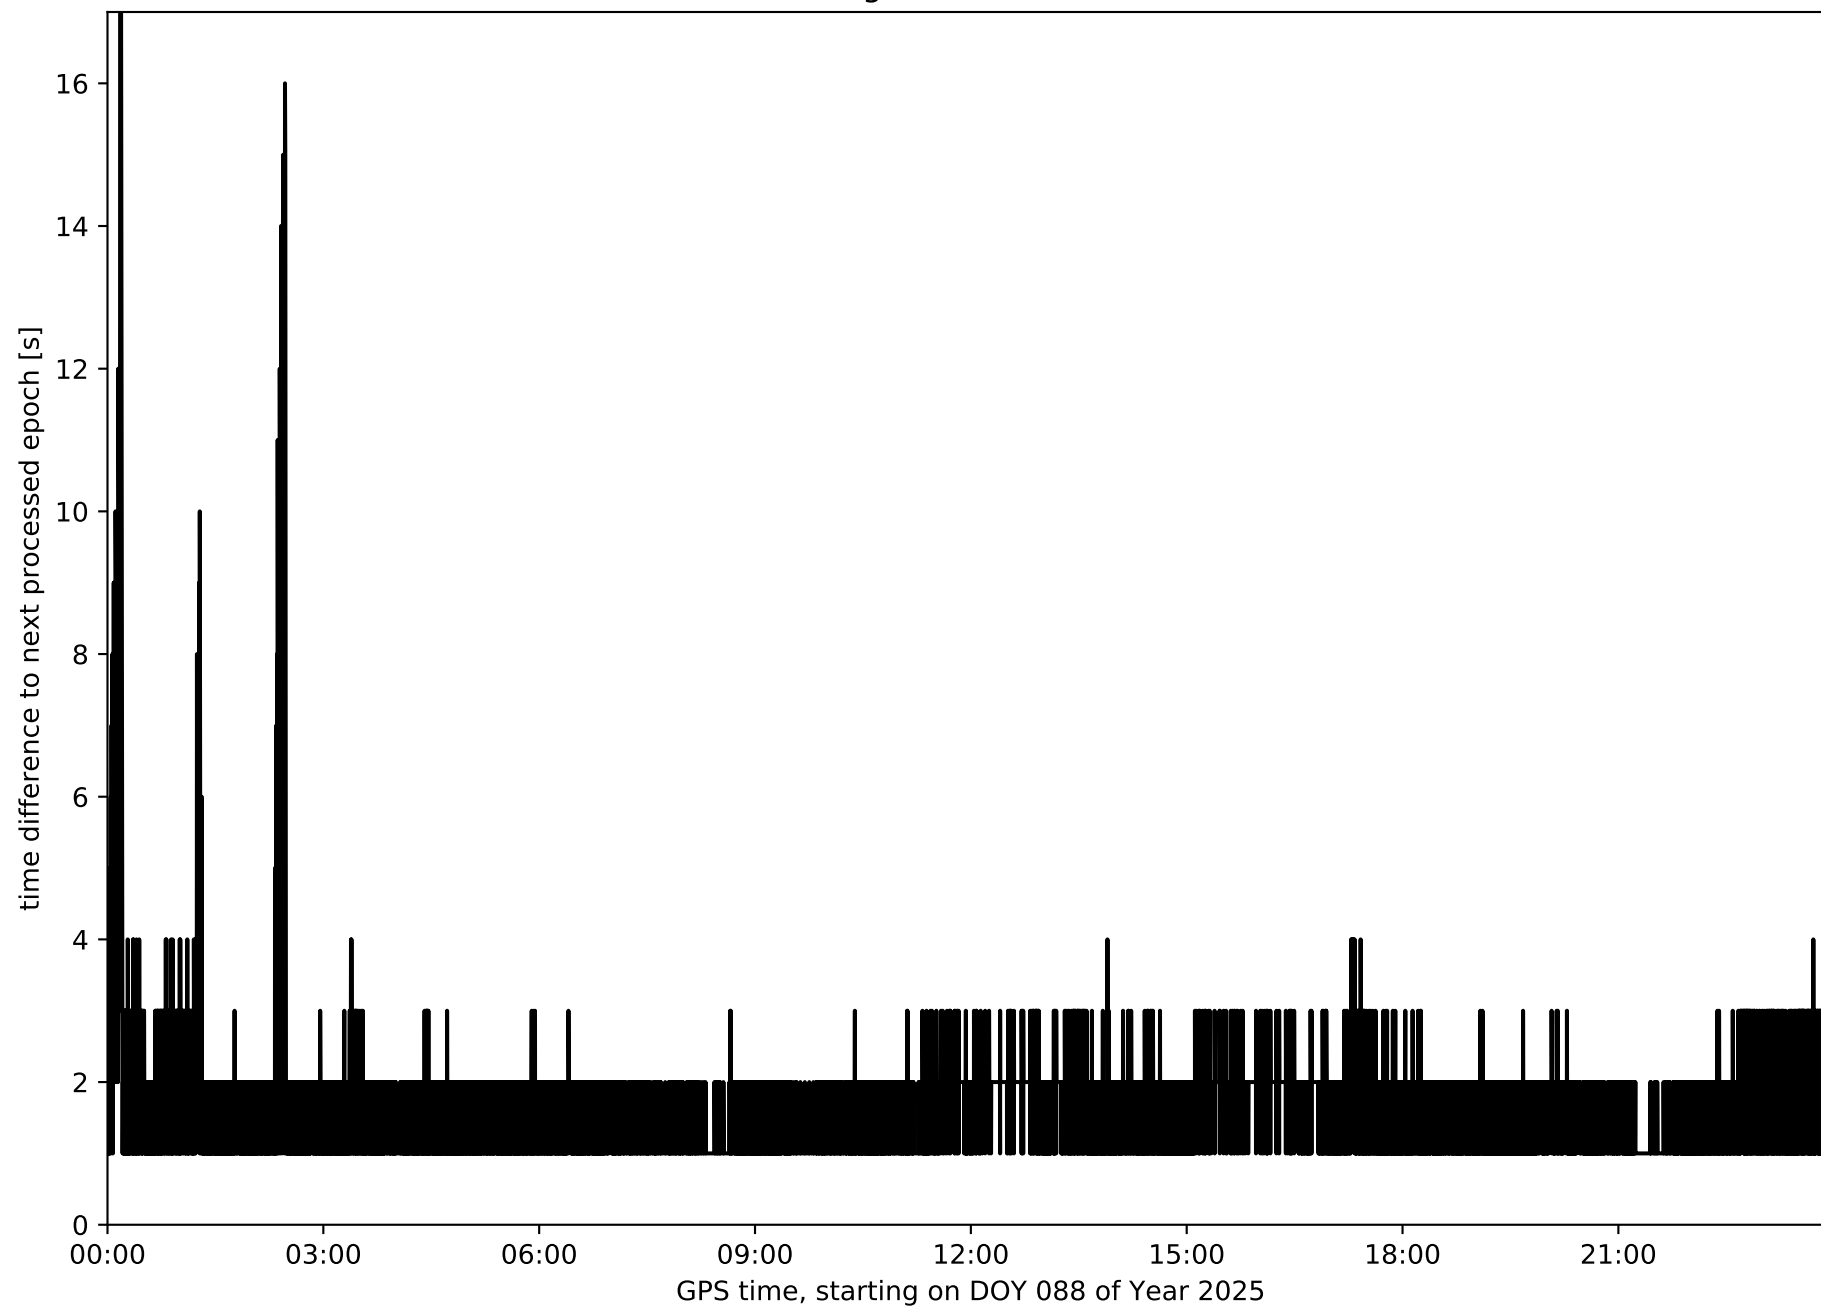


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

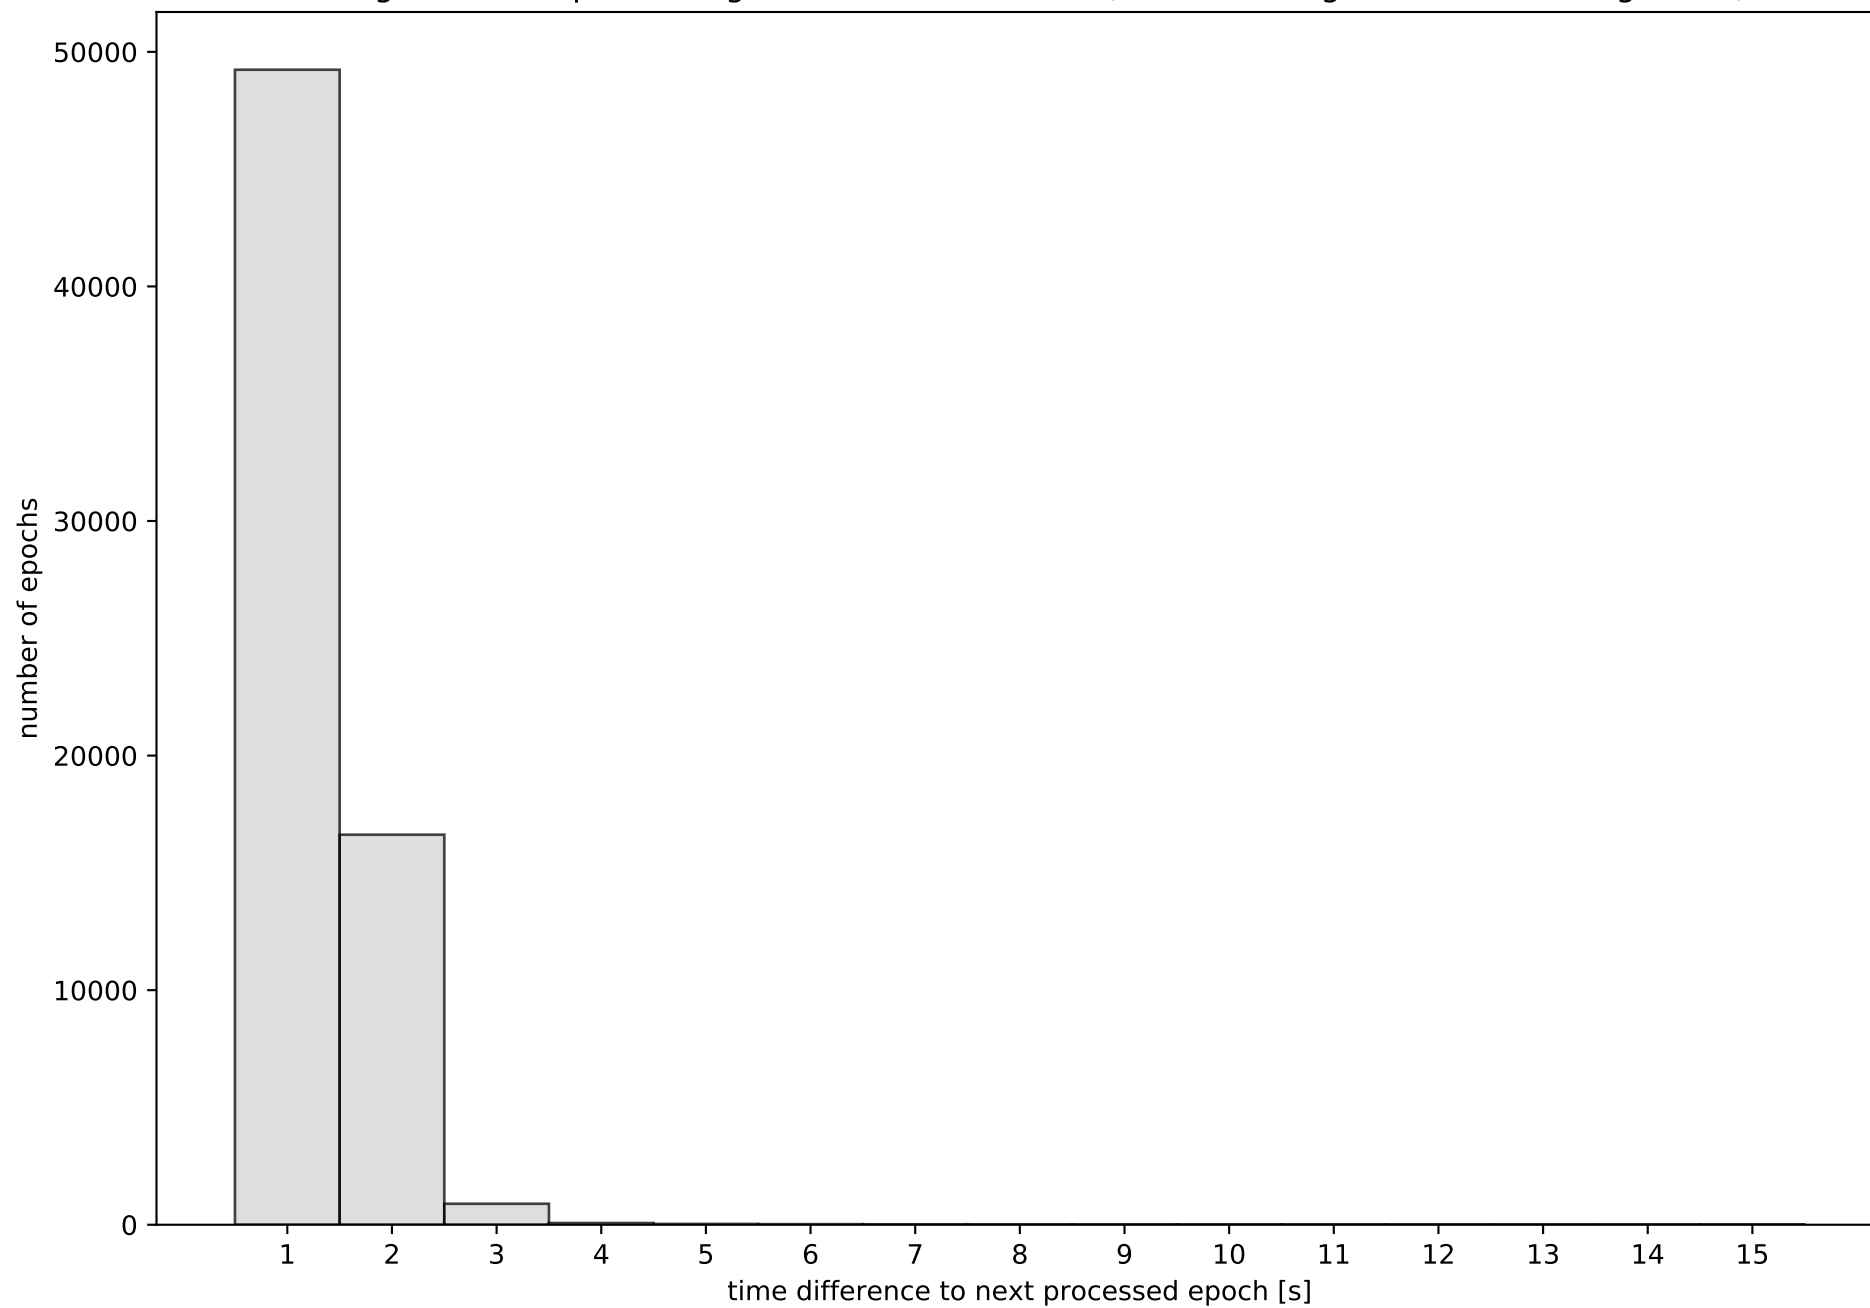


Network NT32 with threshold set to 0.3

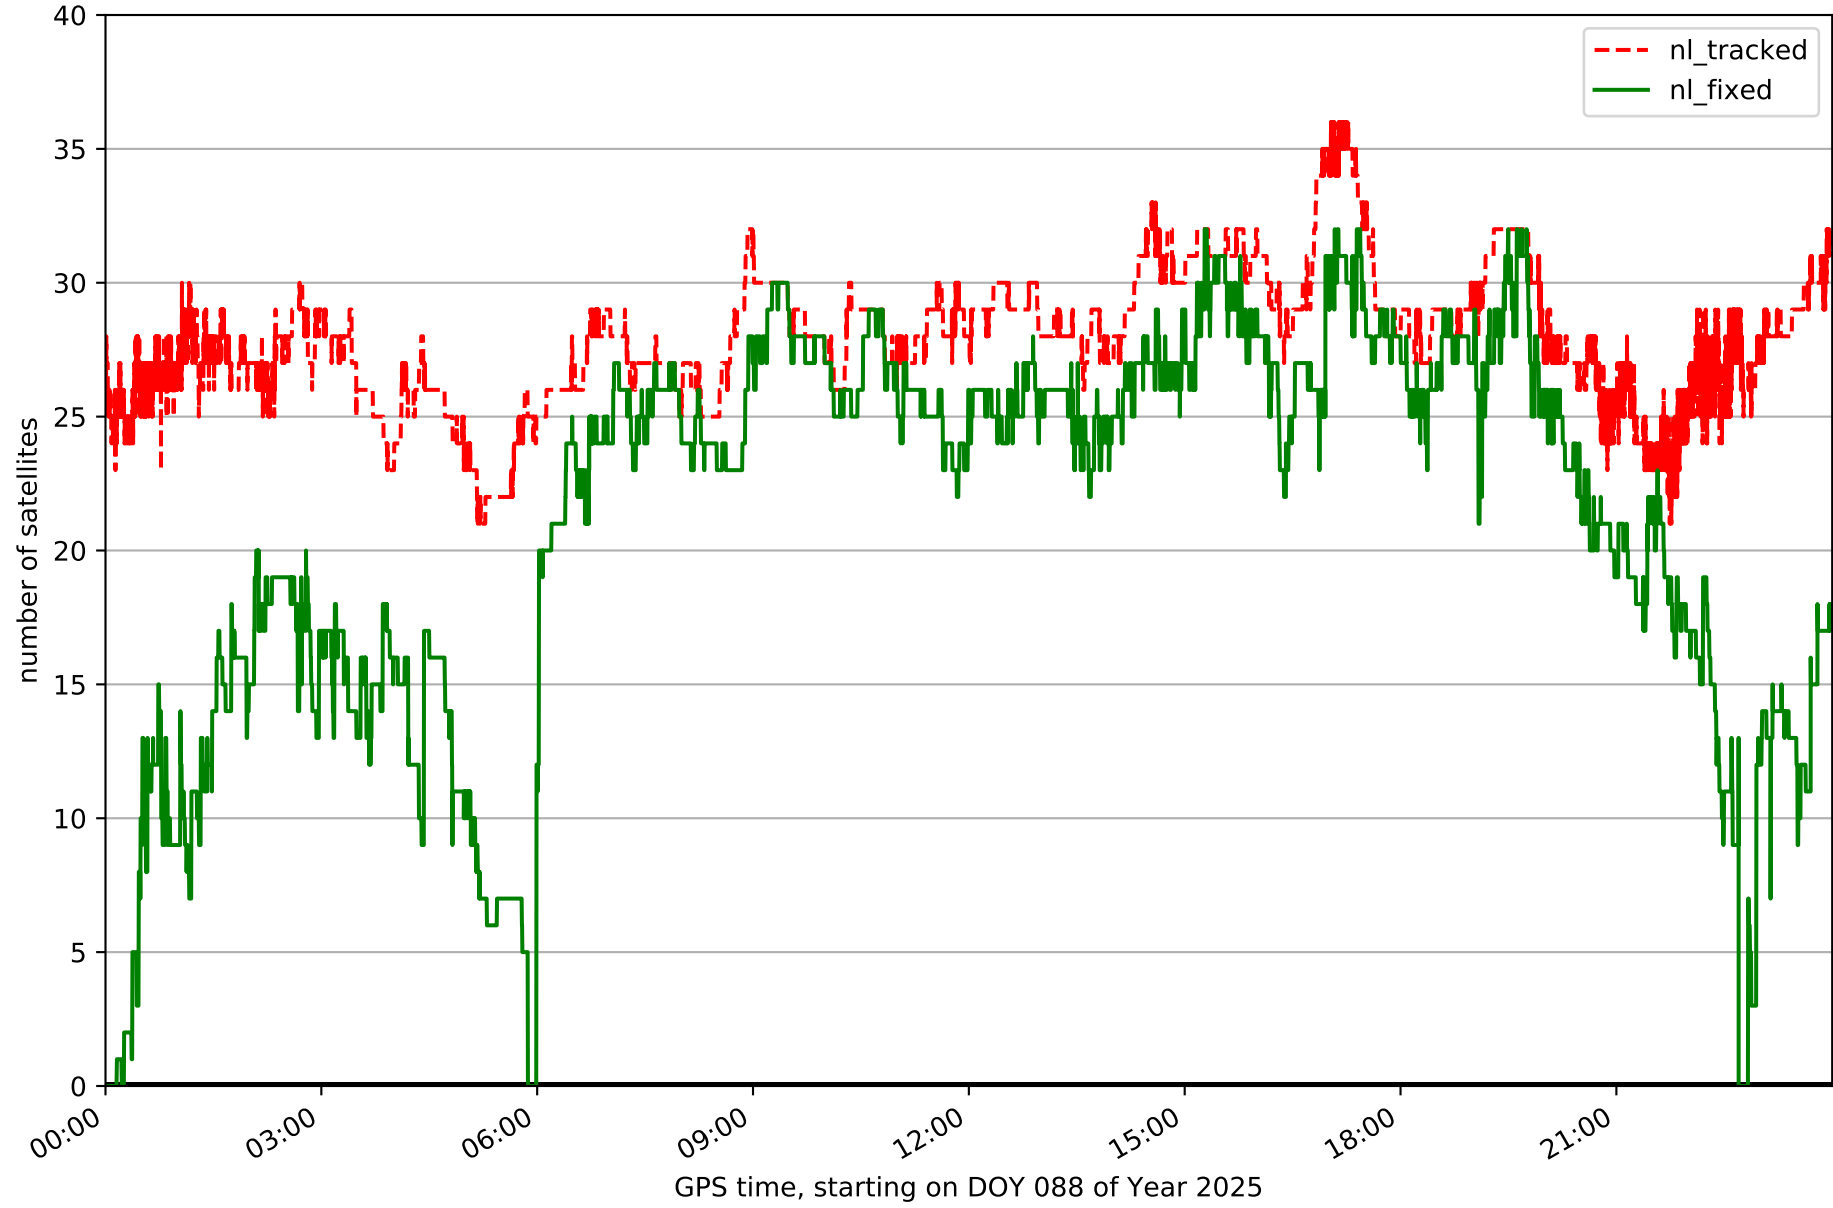


Fixing percentage of satellites in network NT32 with threshold set to 0.3

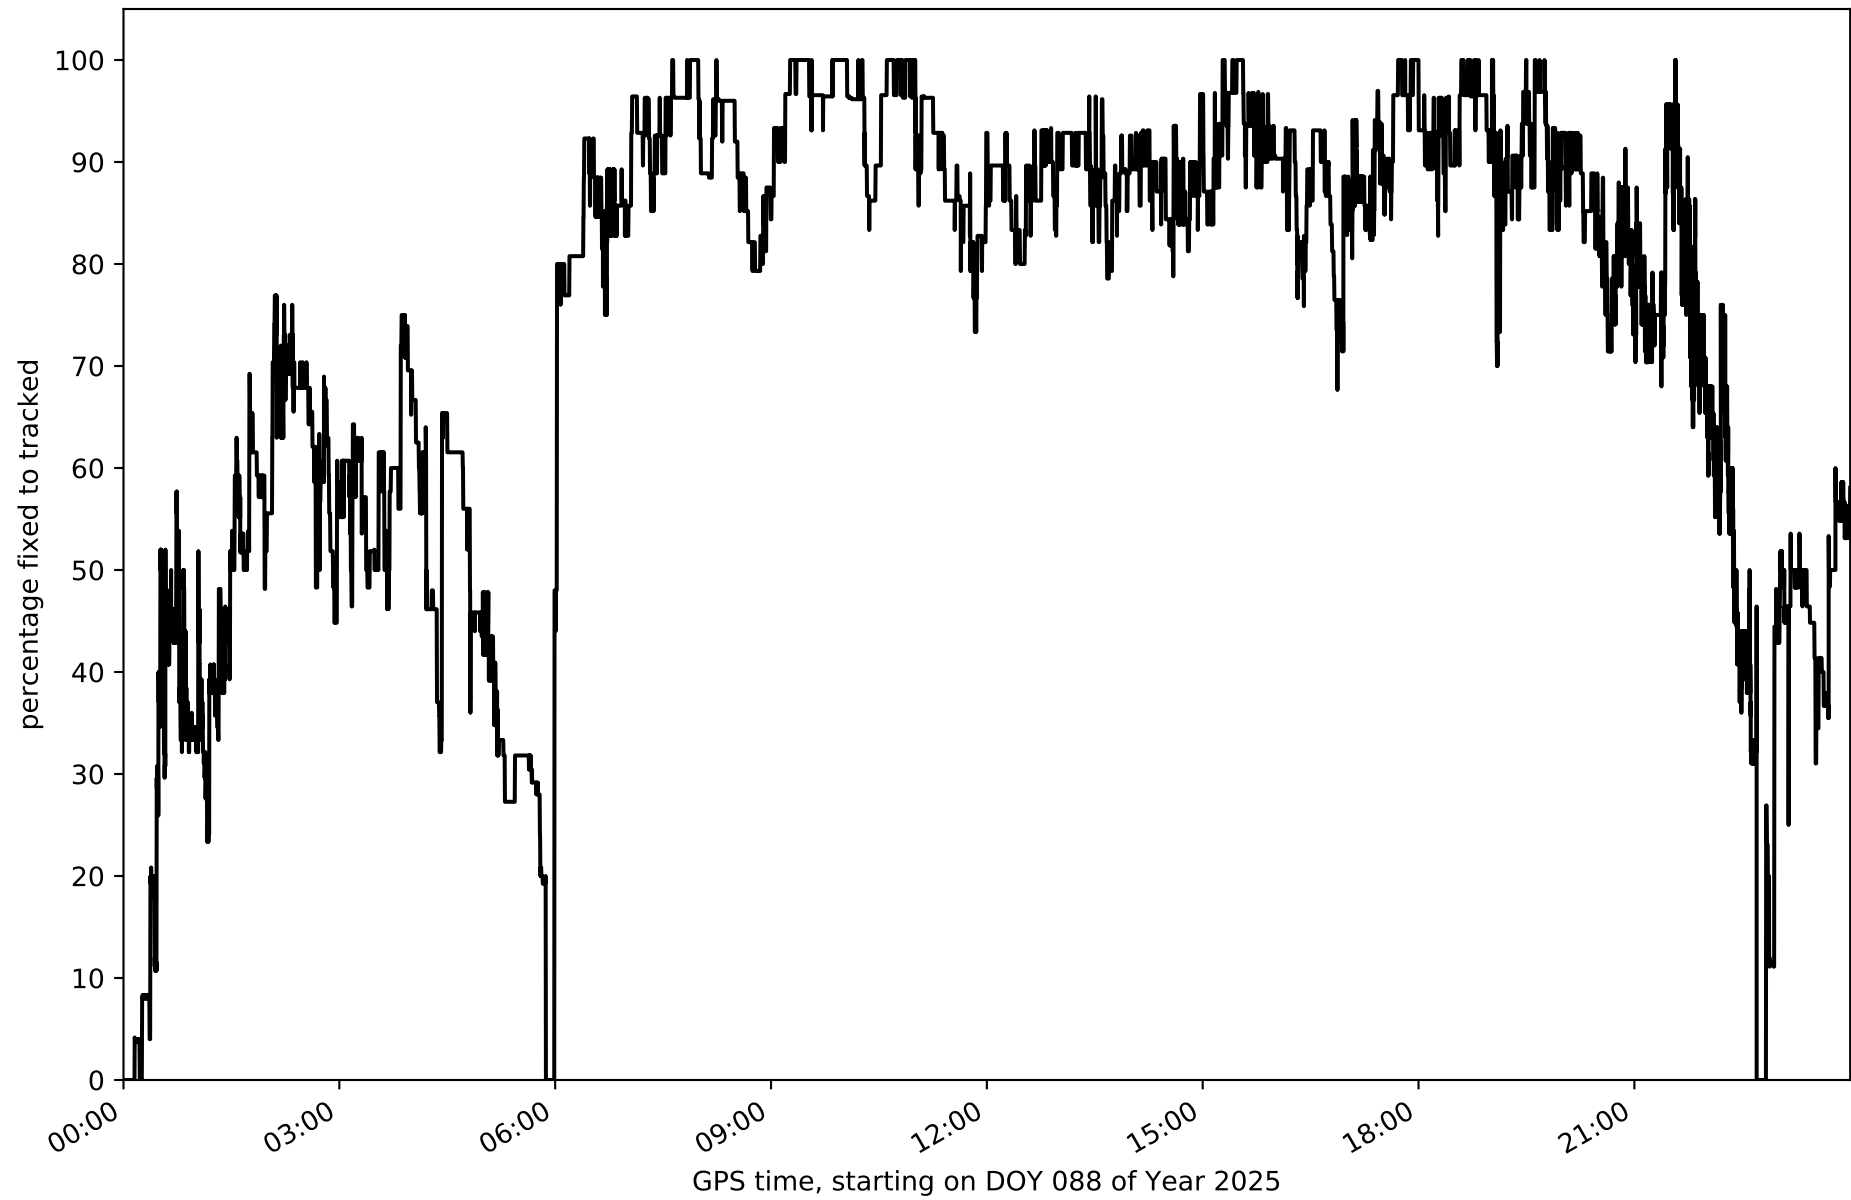


Network NT32 - only GPS with threshold set to 0.3

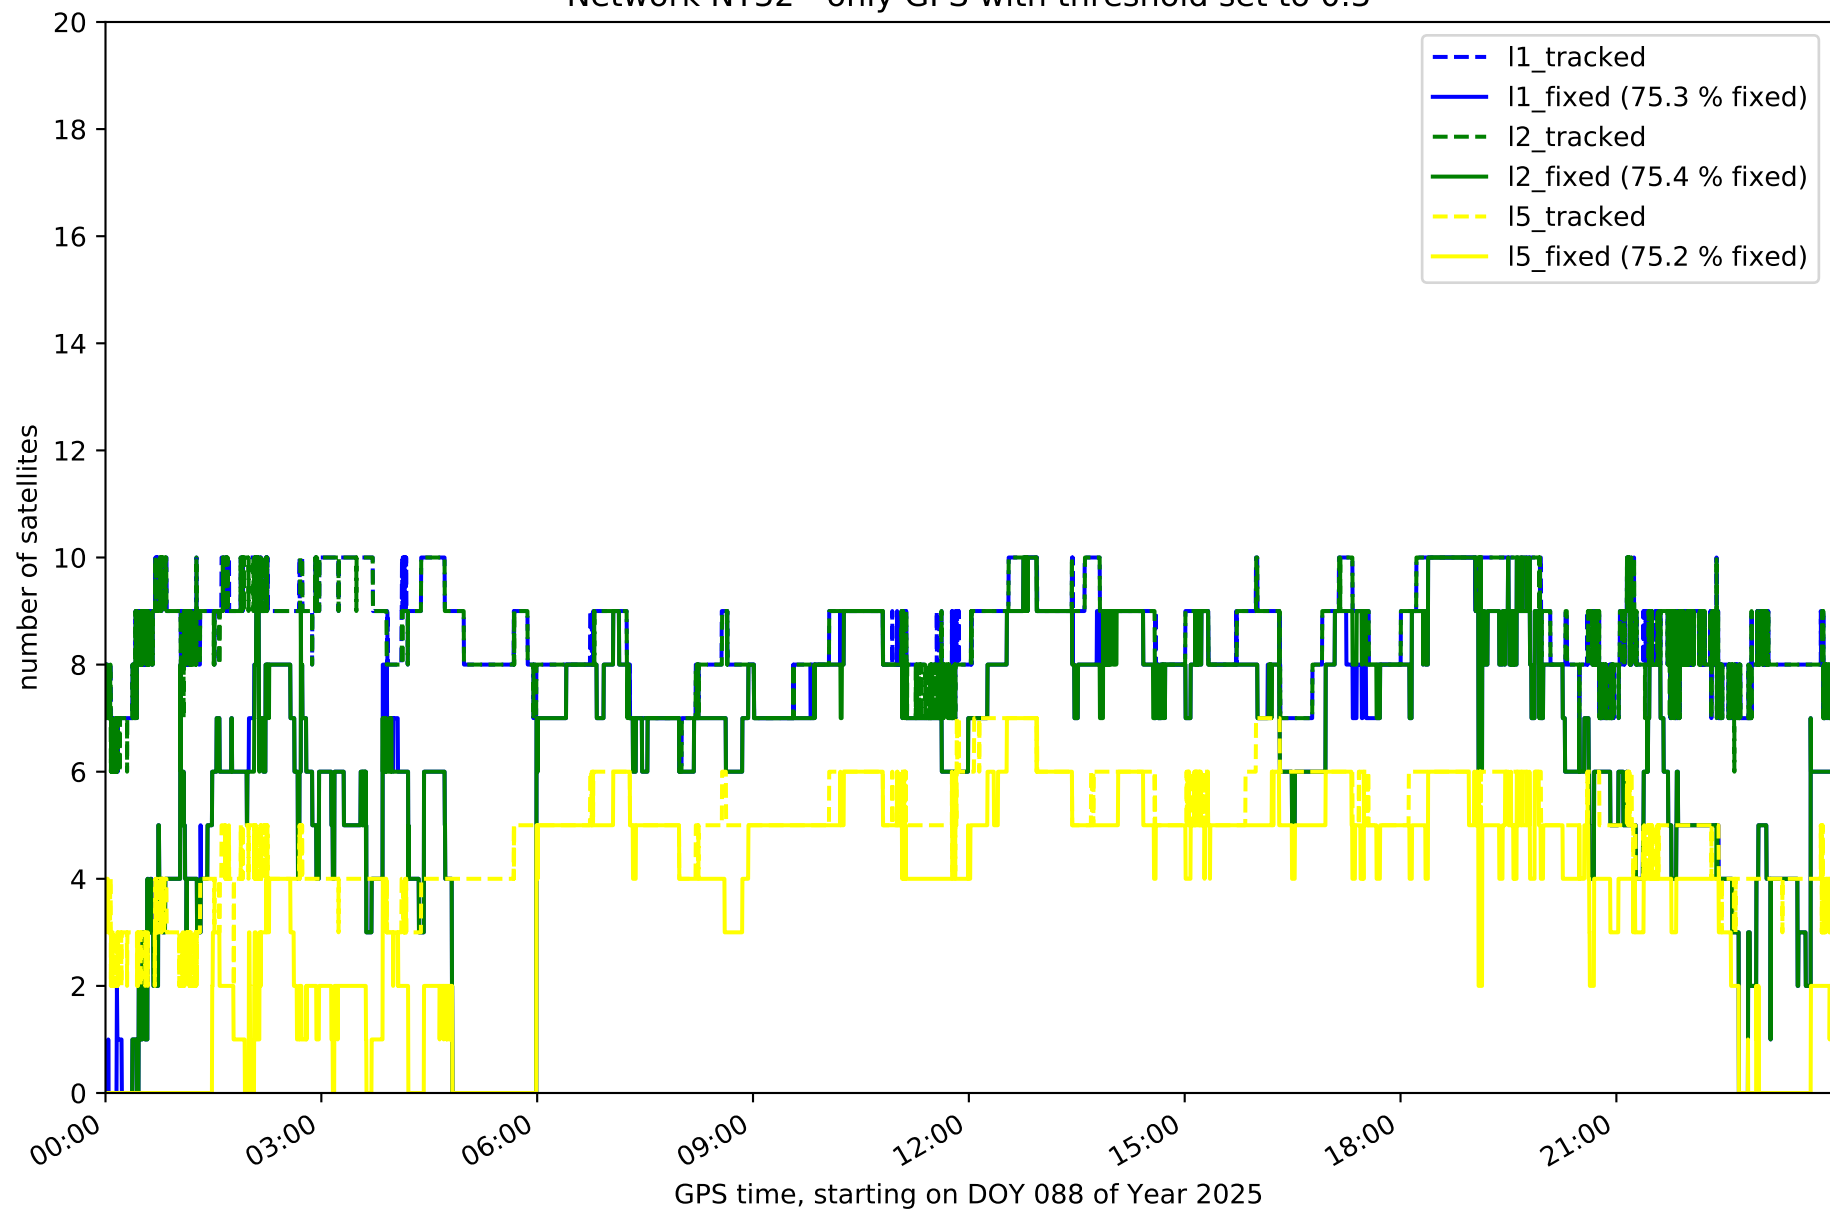


Network NT32 - only GLONASS with threshold set to 0.3

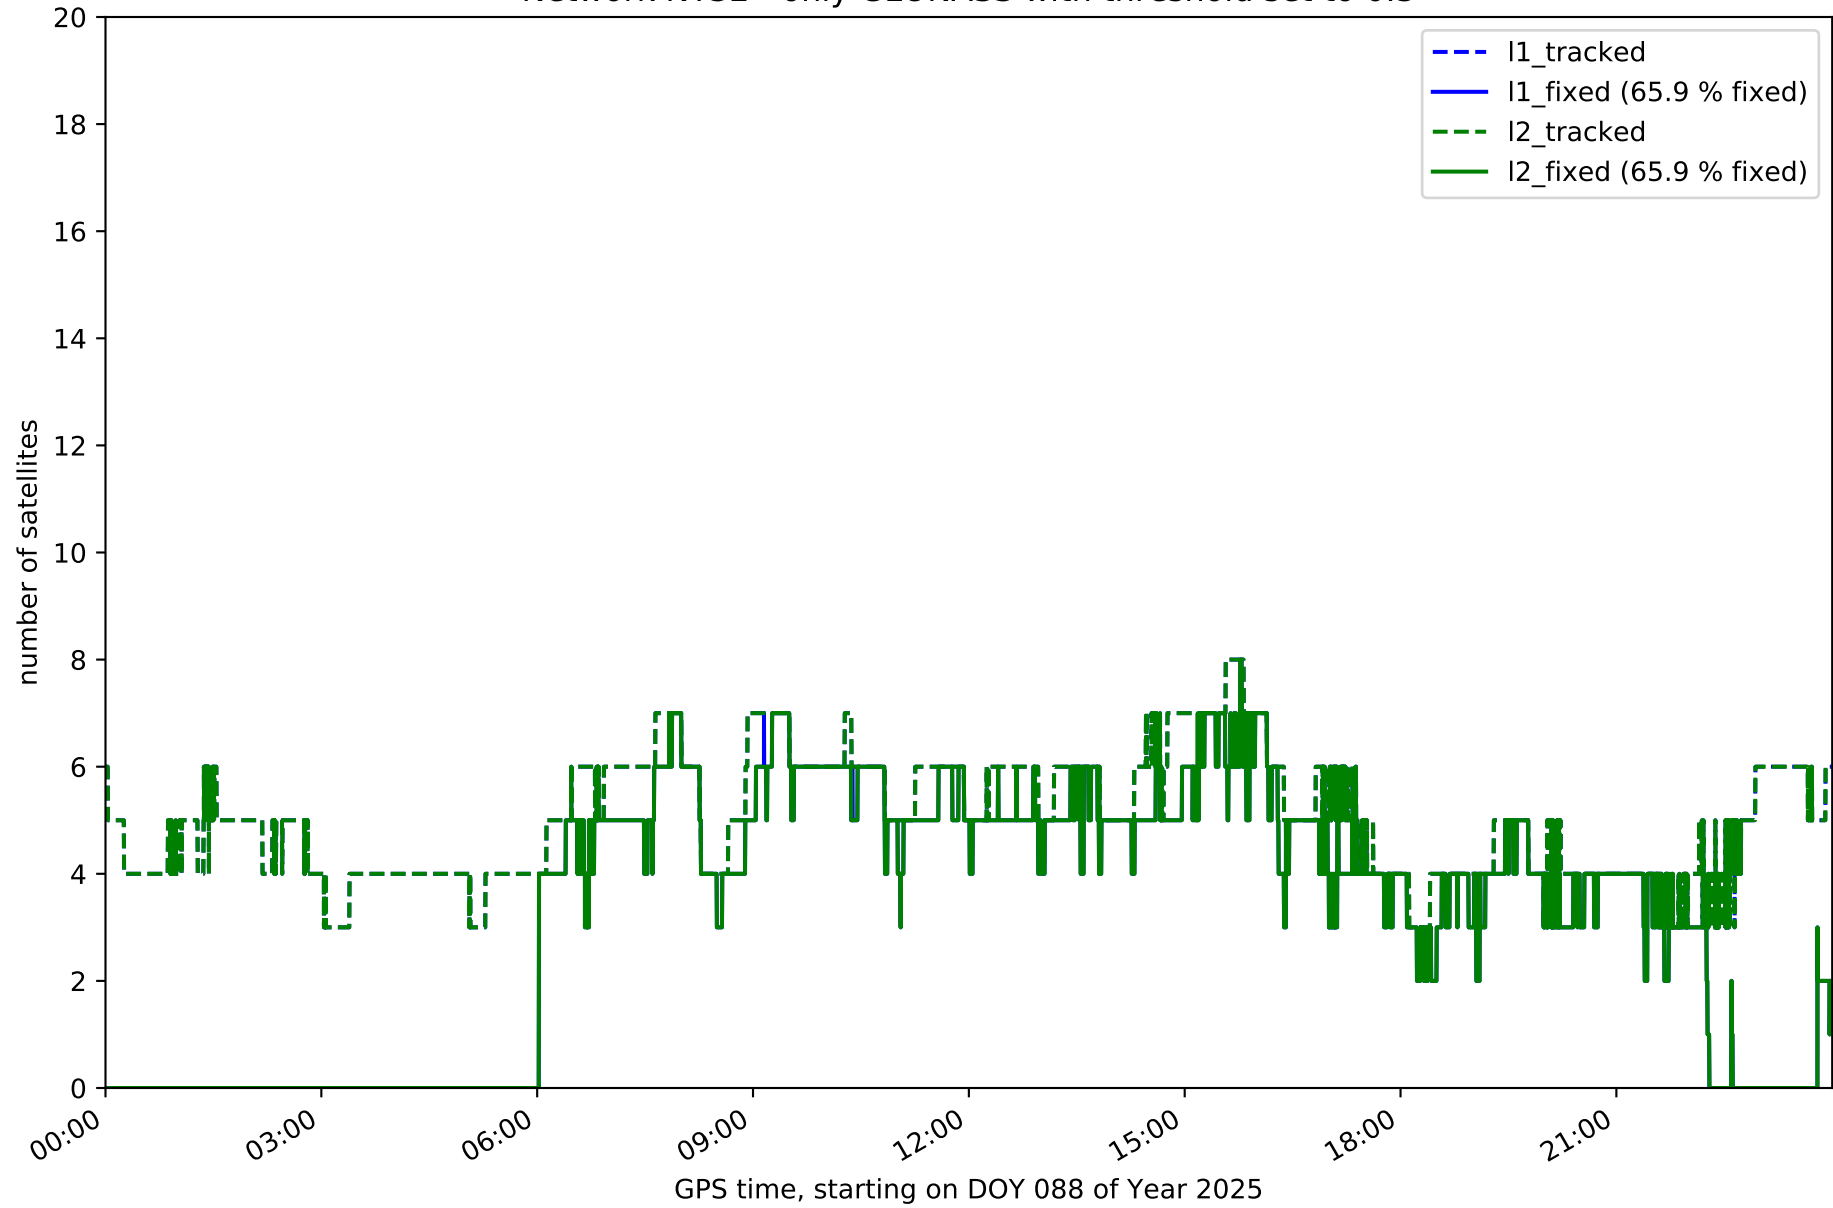


Network NT32 - only BDS with threshold set to 0.3

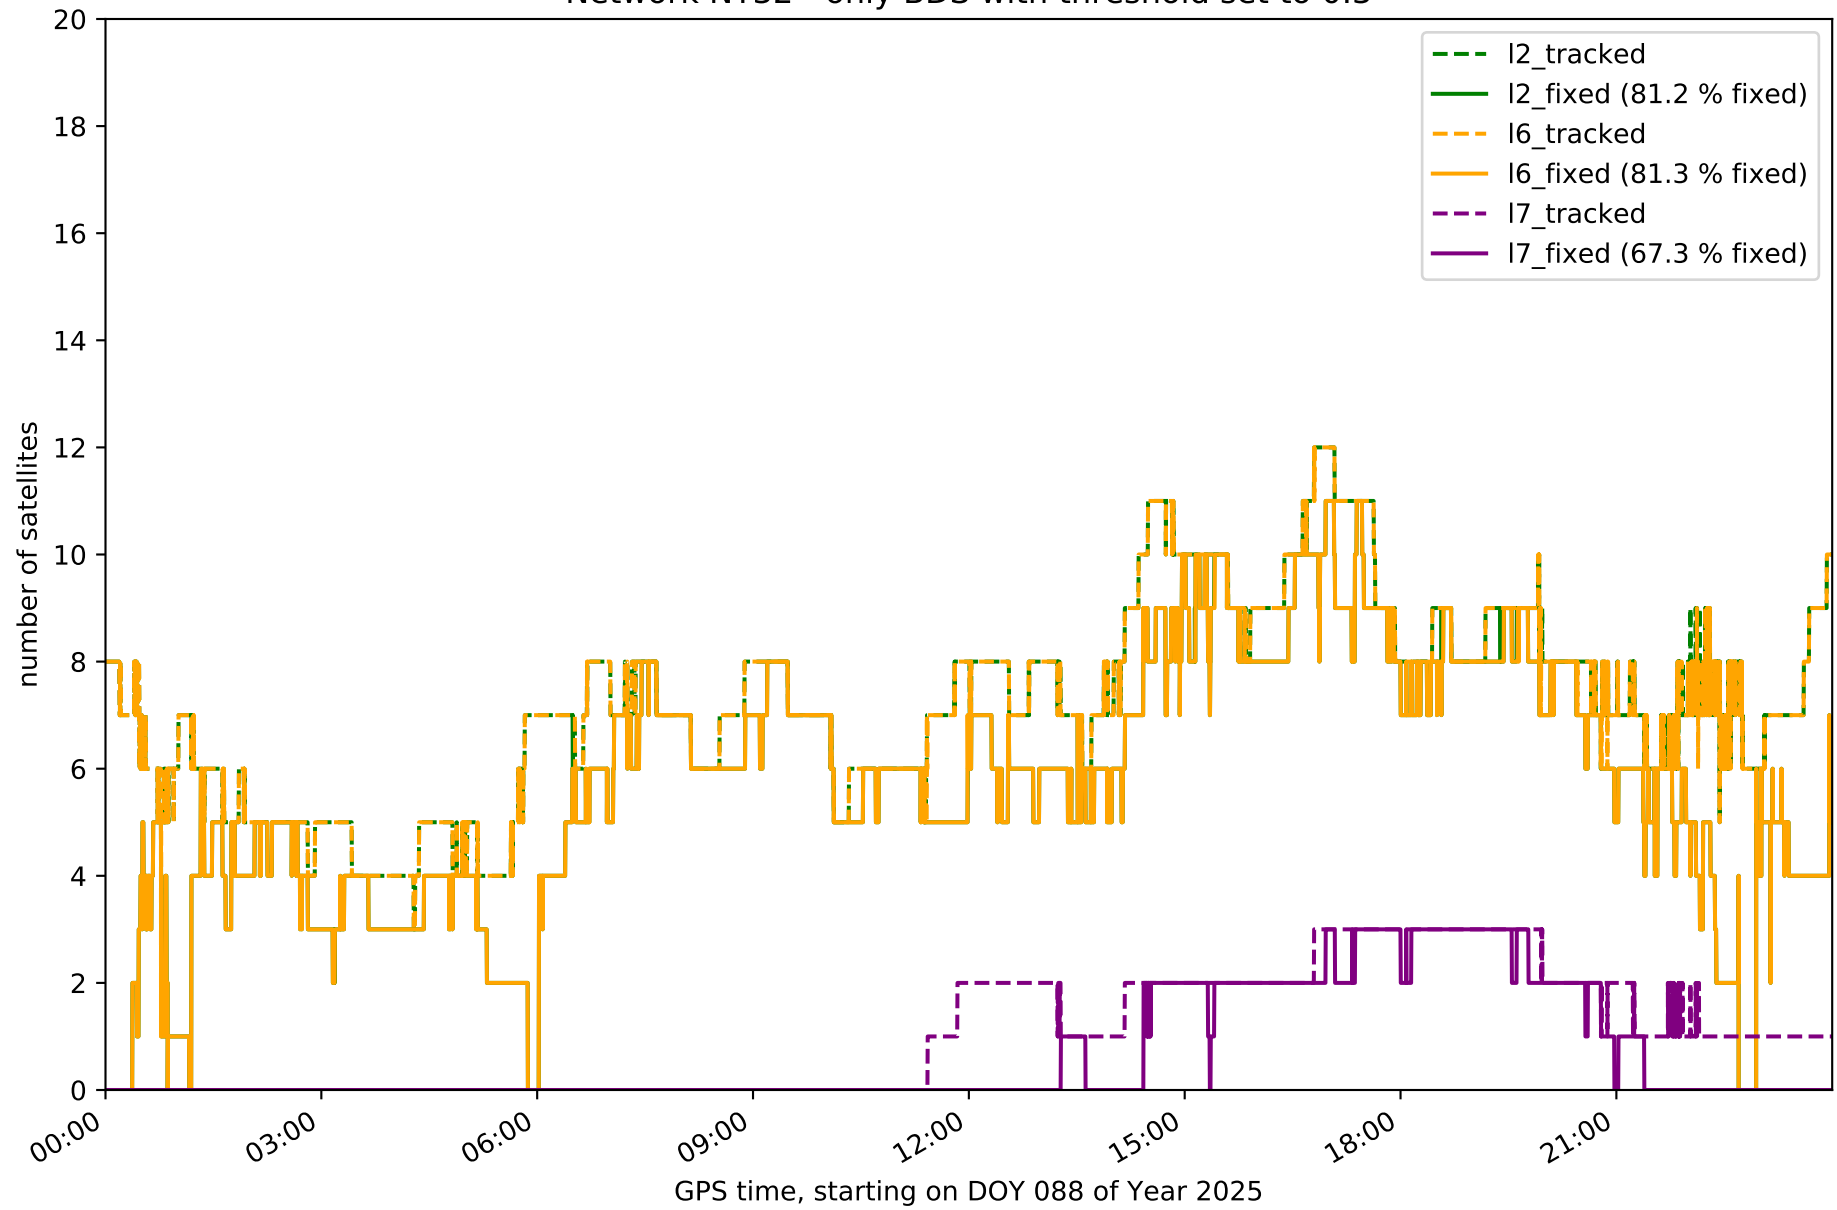


Network NT32 - only Galileo with threshold set to 0.3

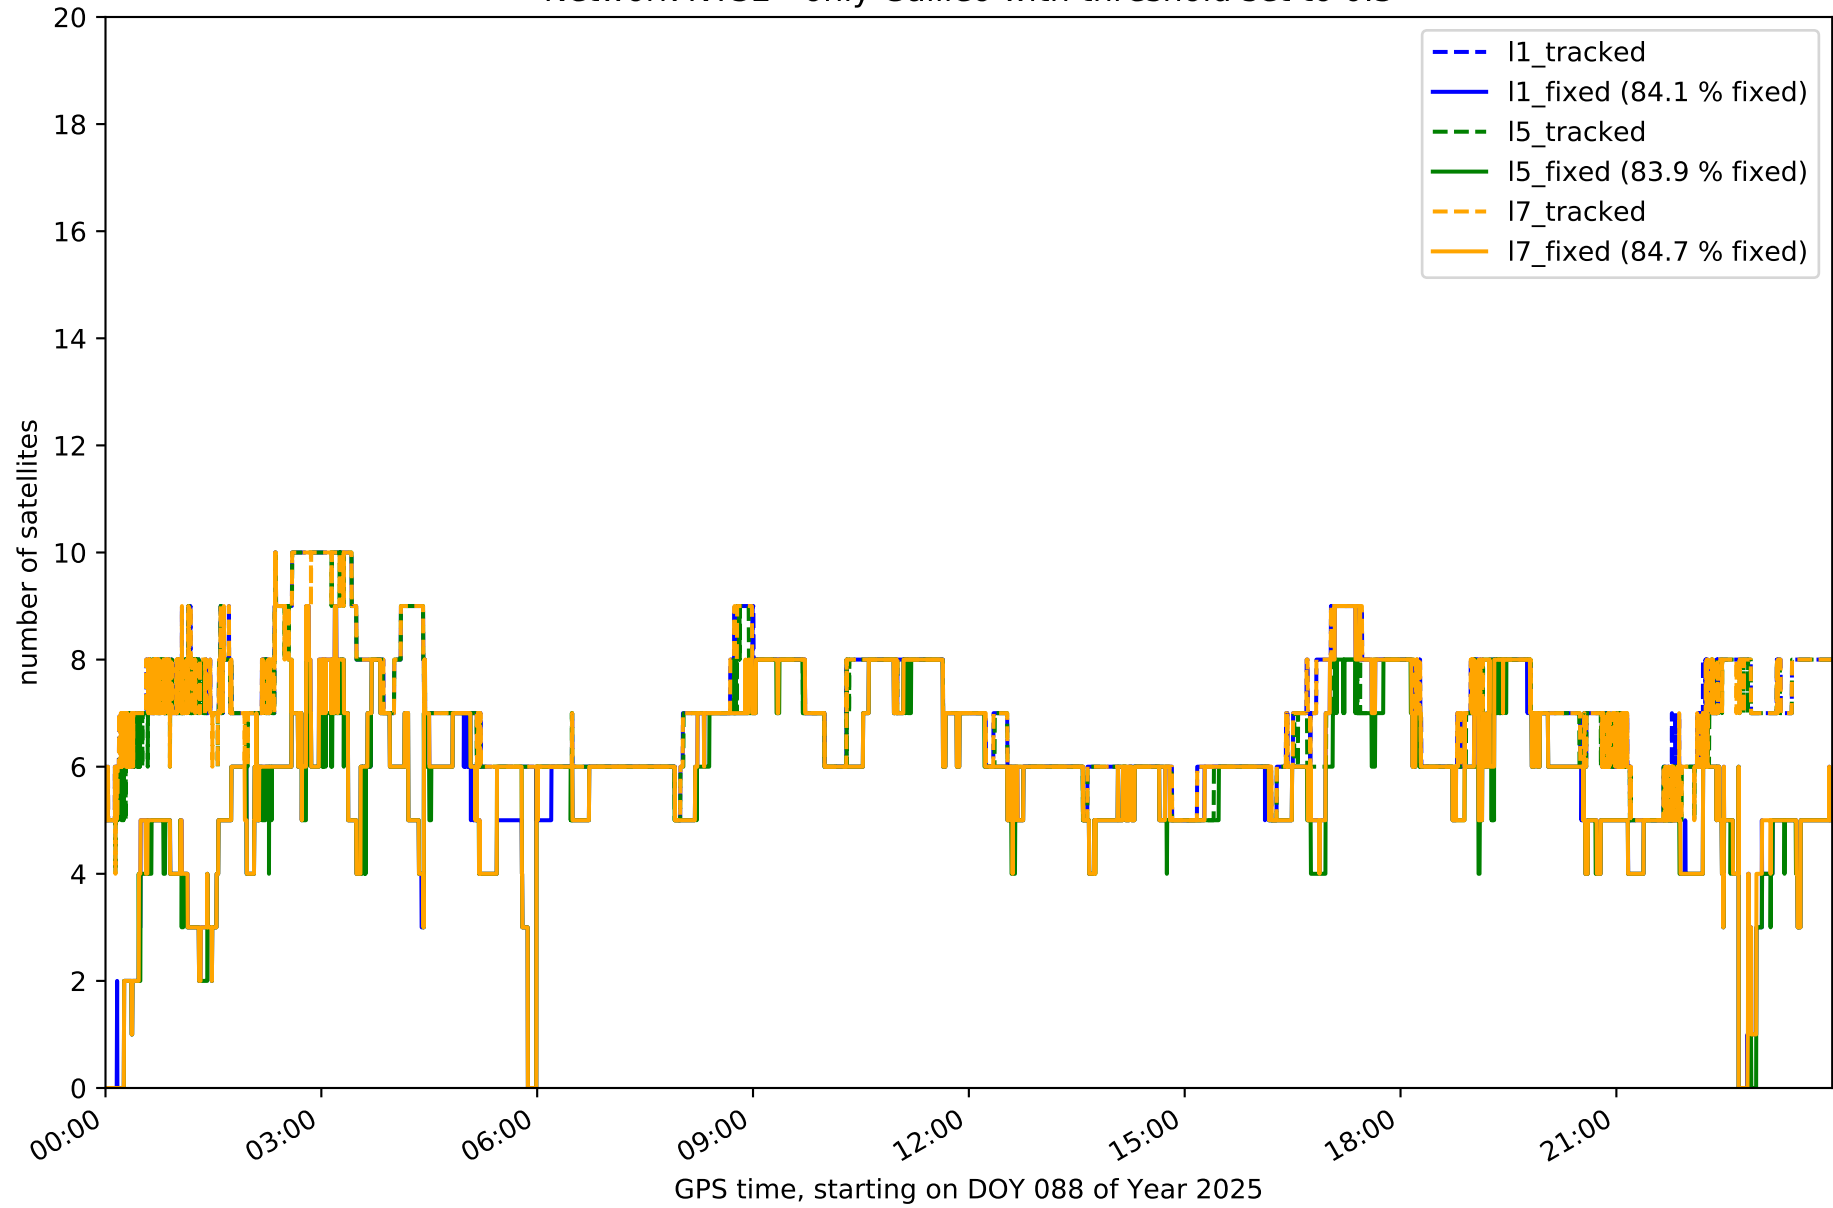


Station EH01 in network NT32

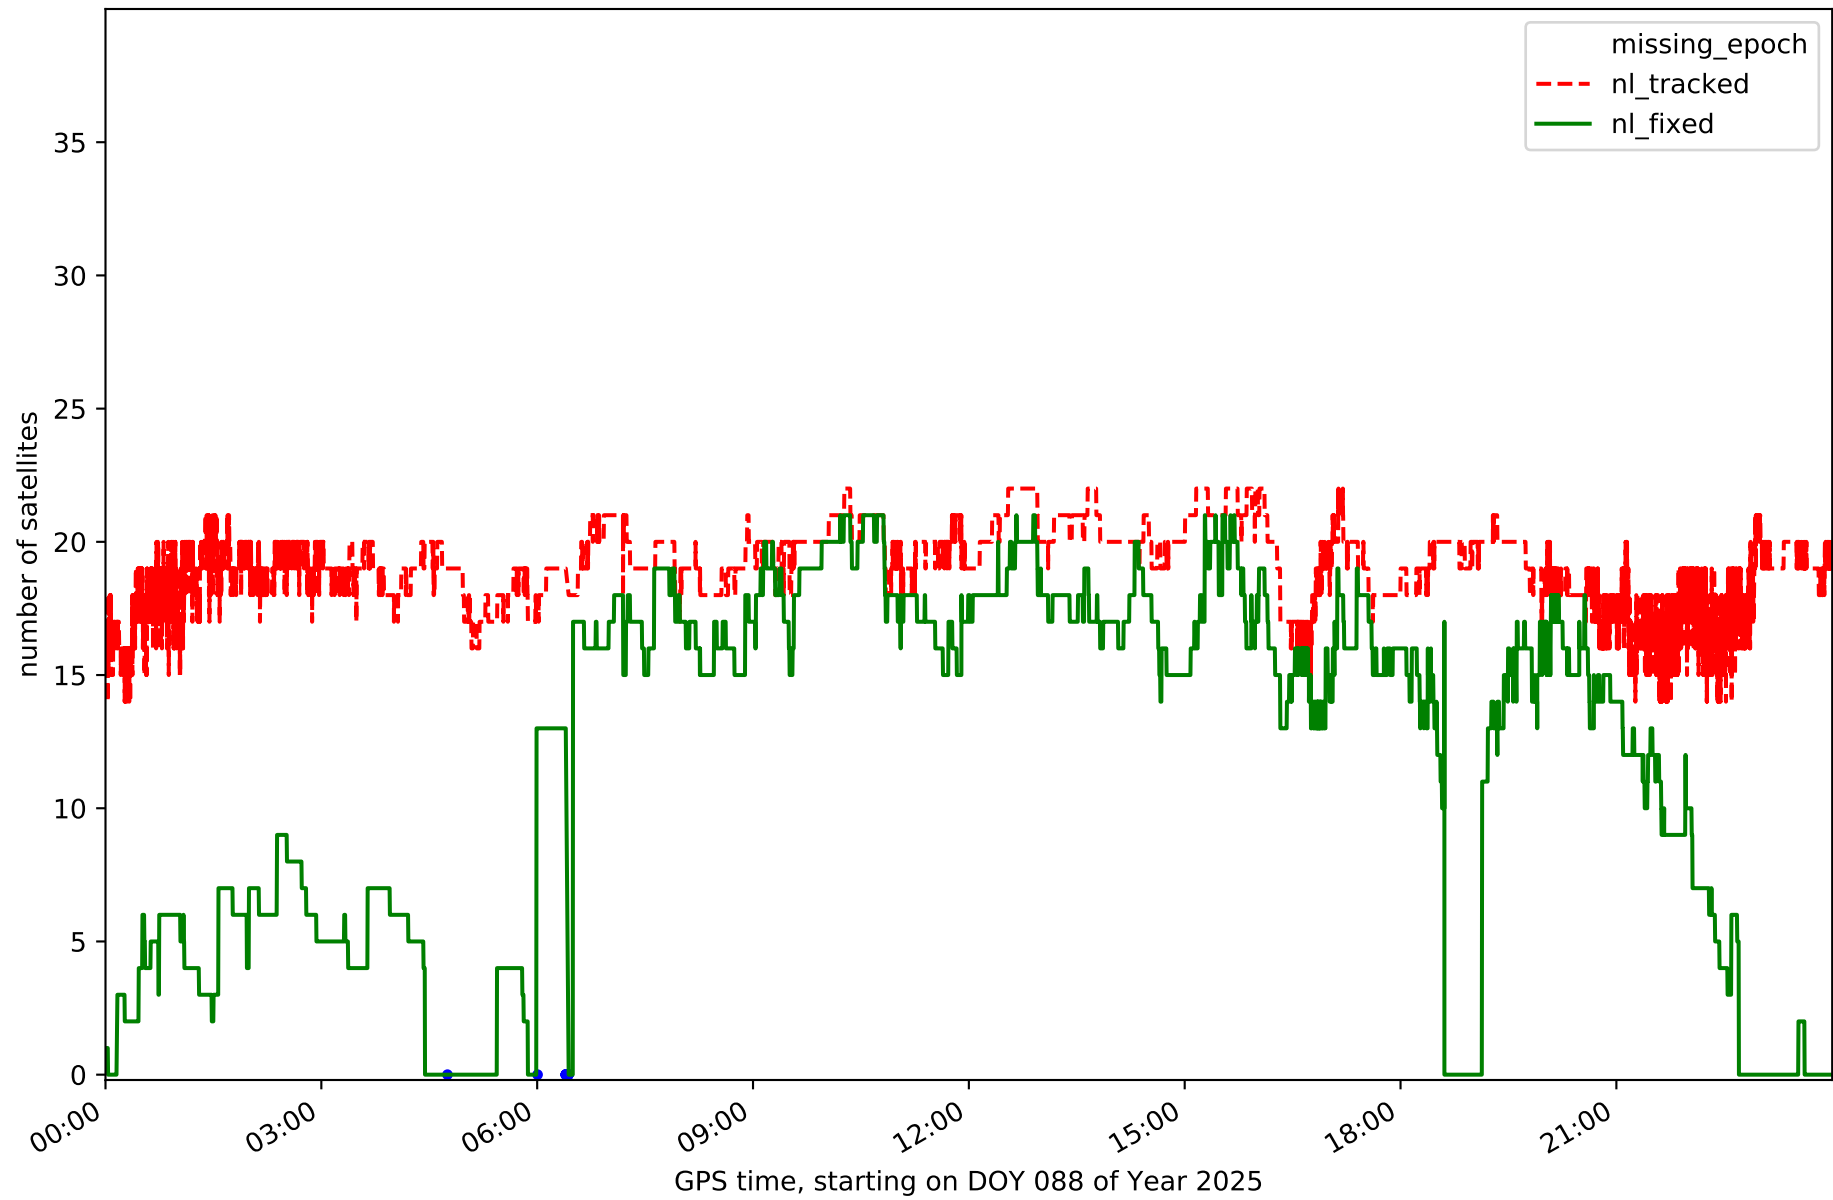


Station EH02 in network NT32

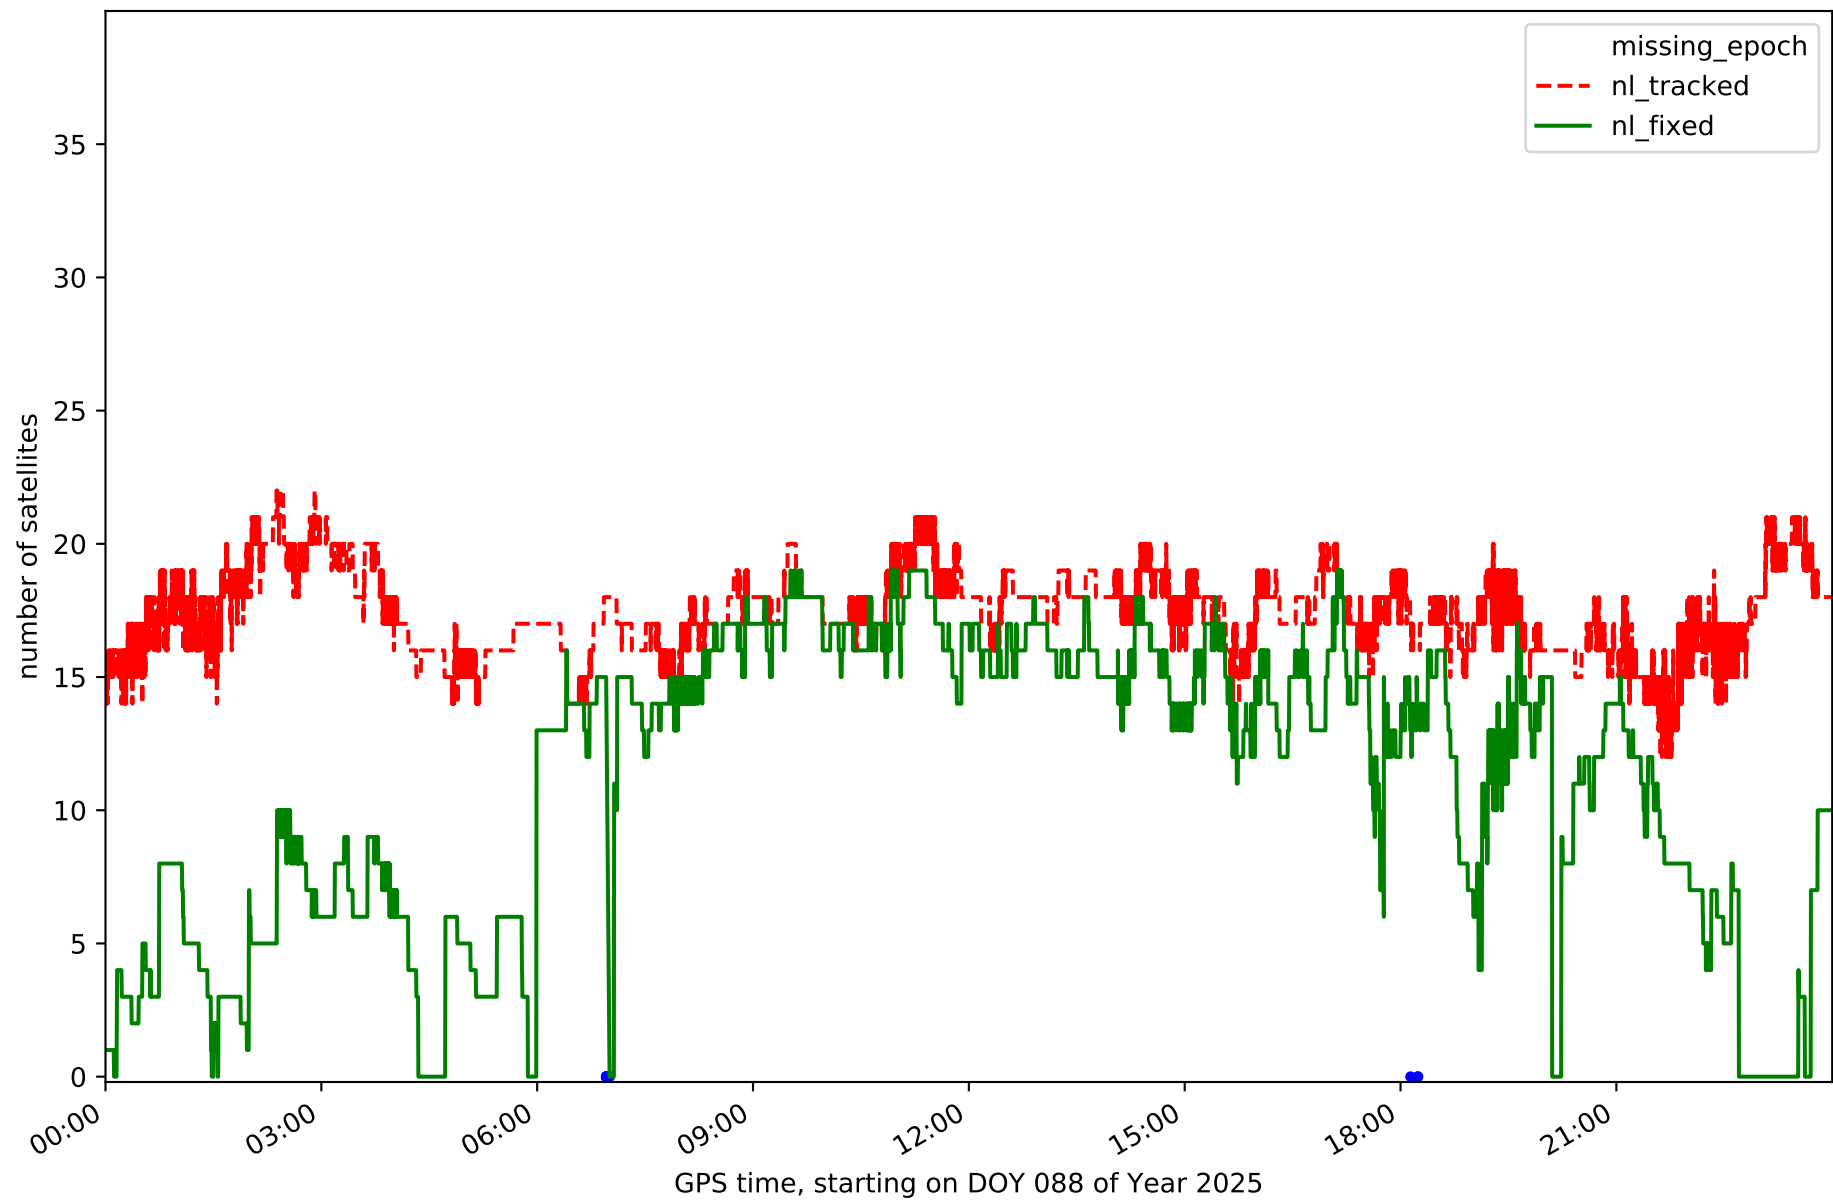


Station GOM1 in network NT32

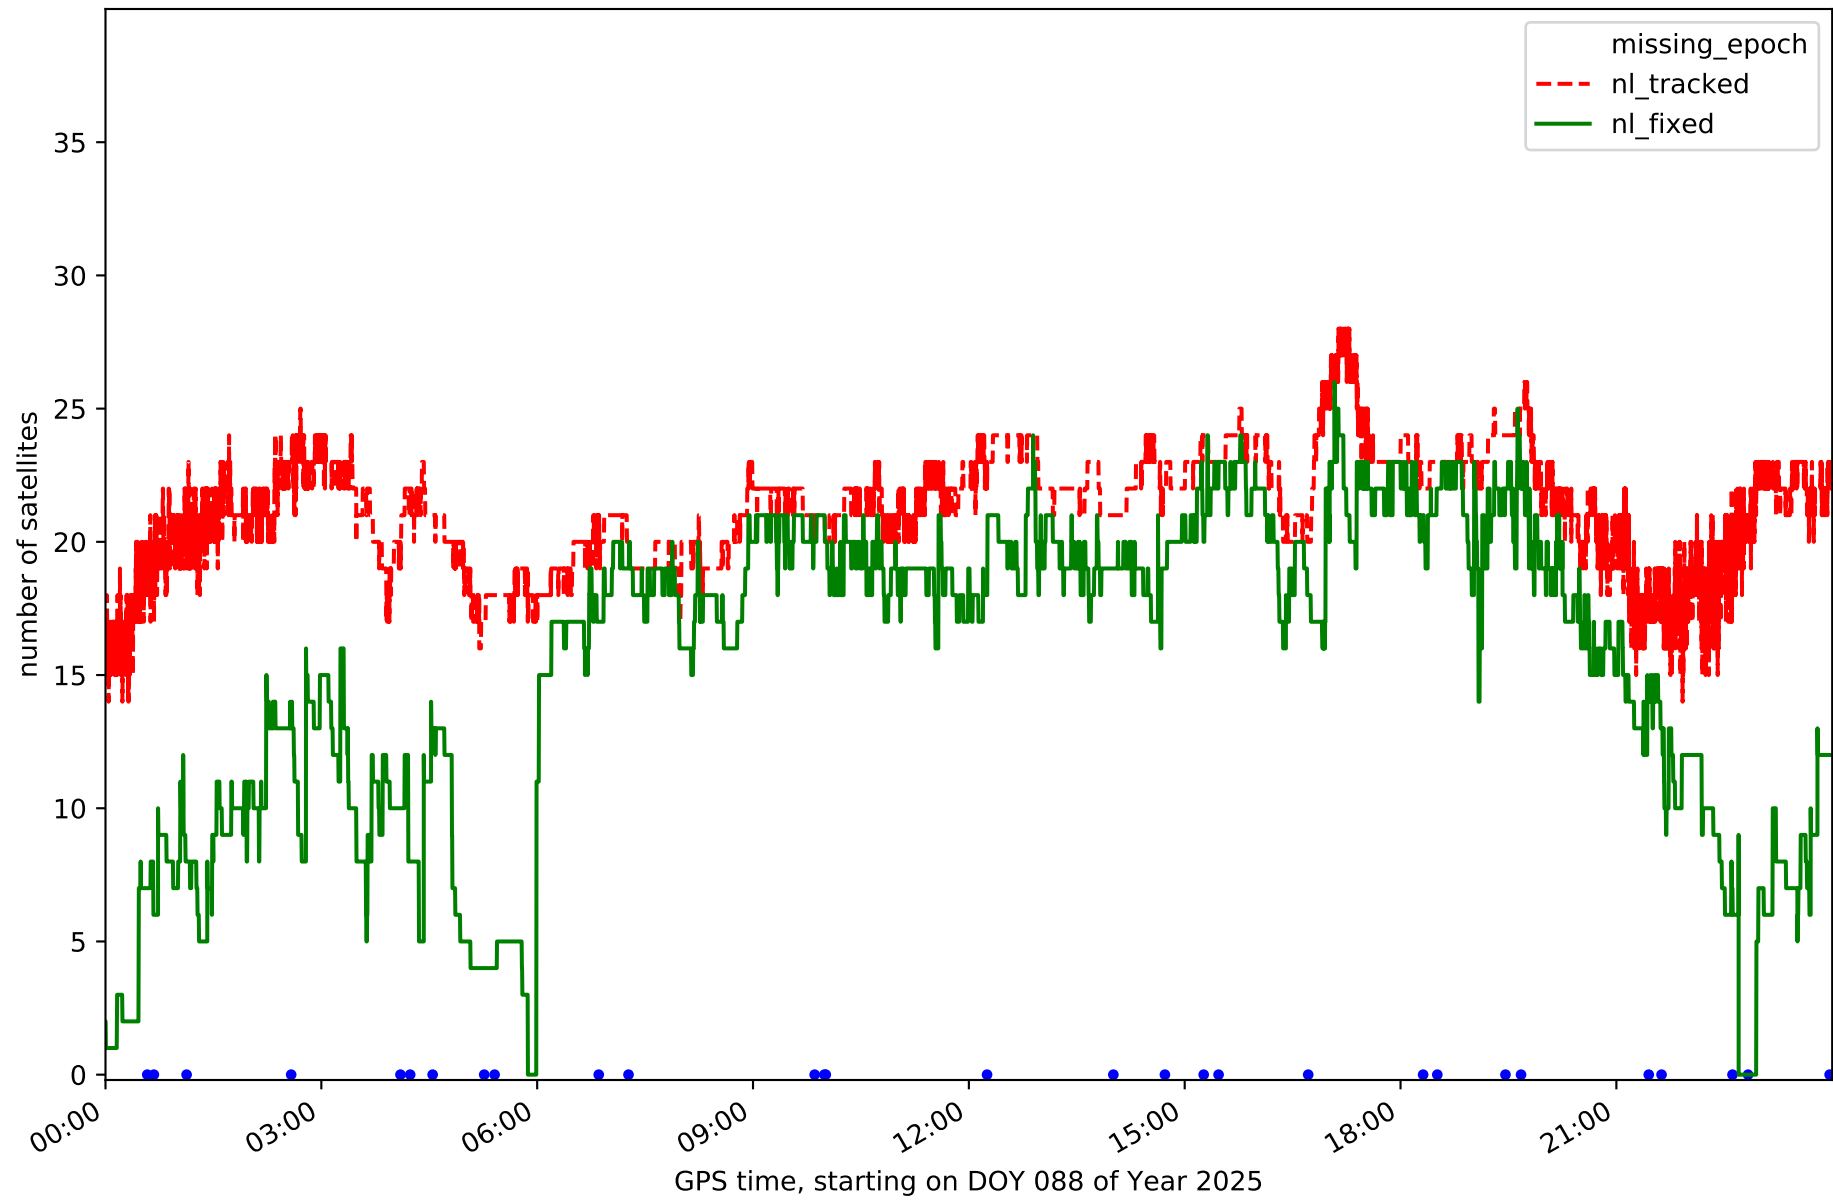


Station IZAN in network NT32

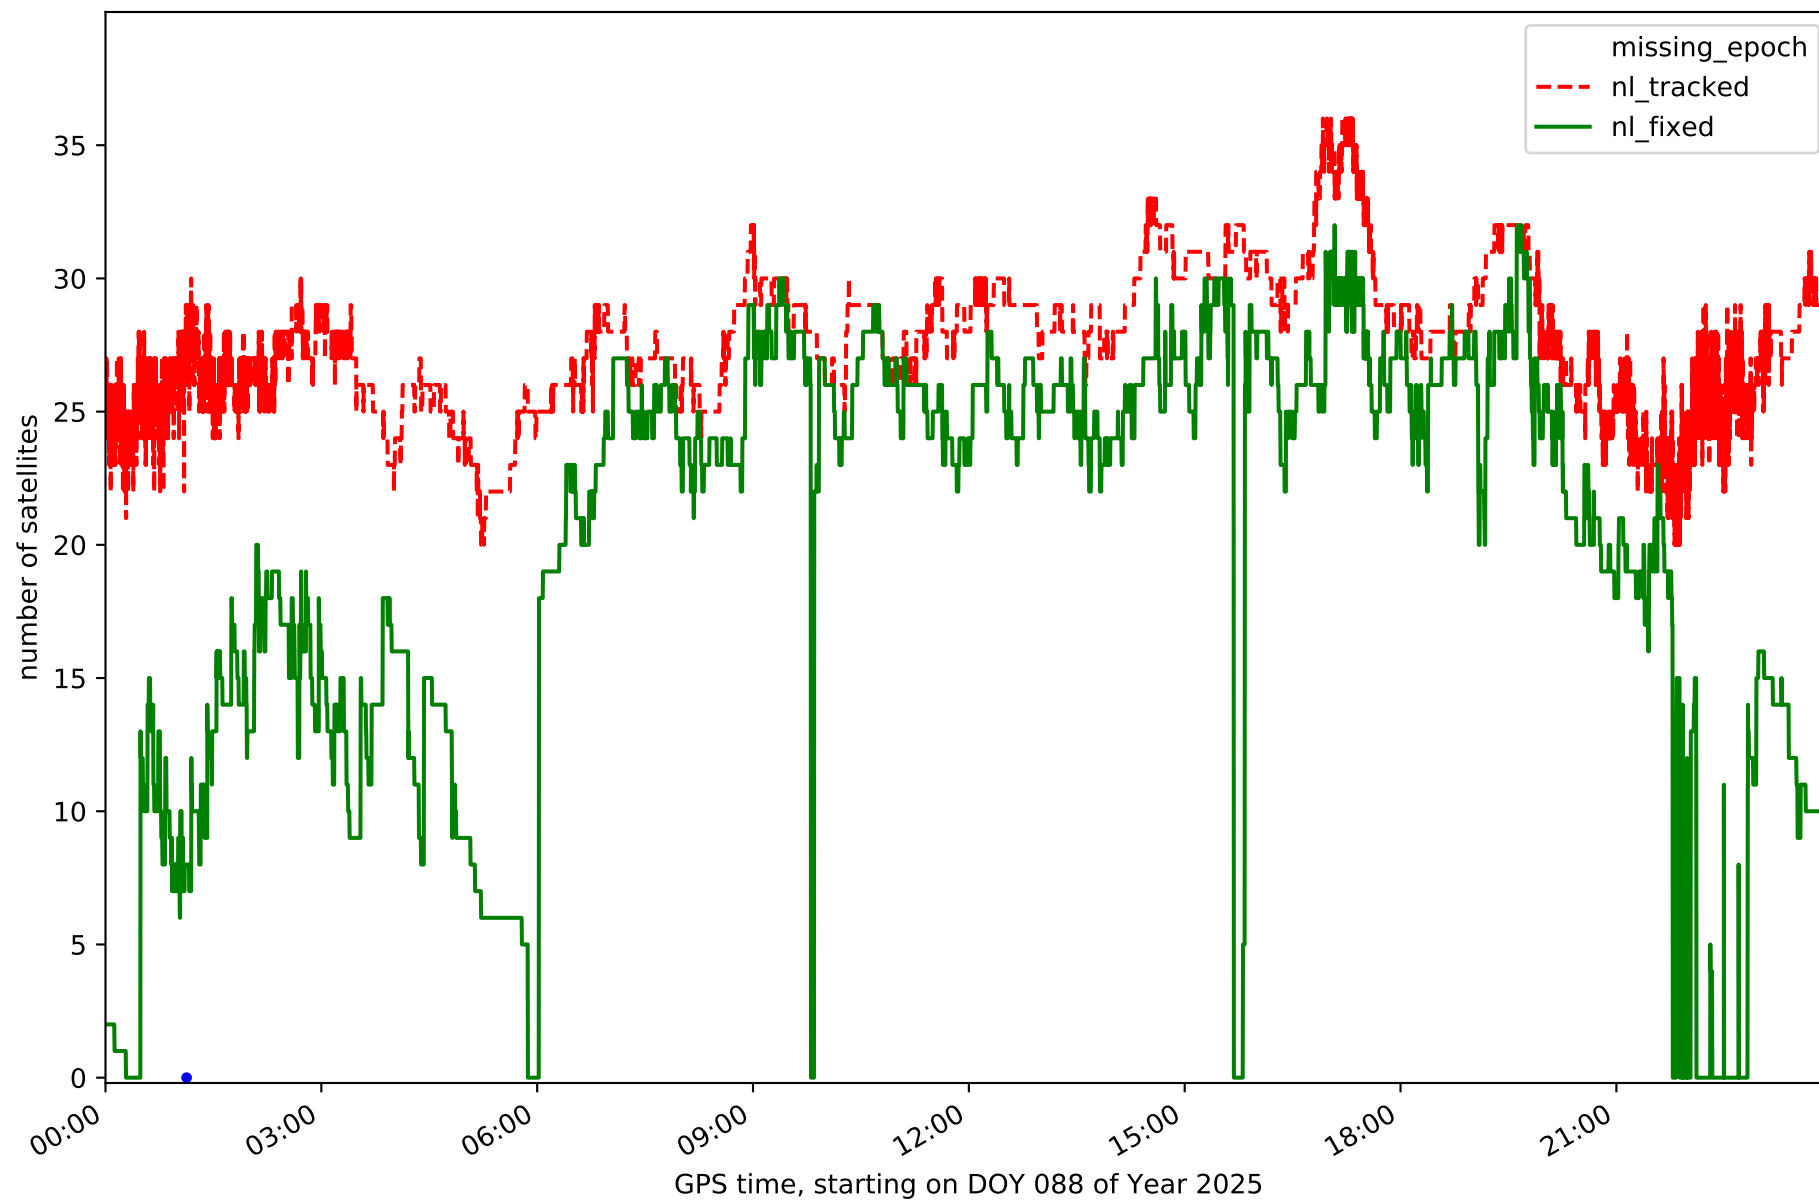


Station LP01 in network NT32

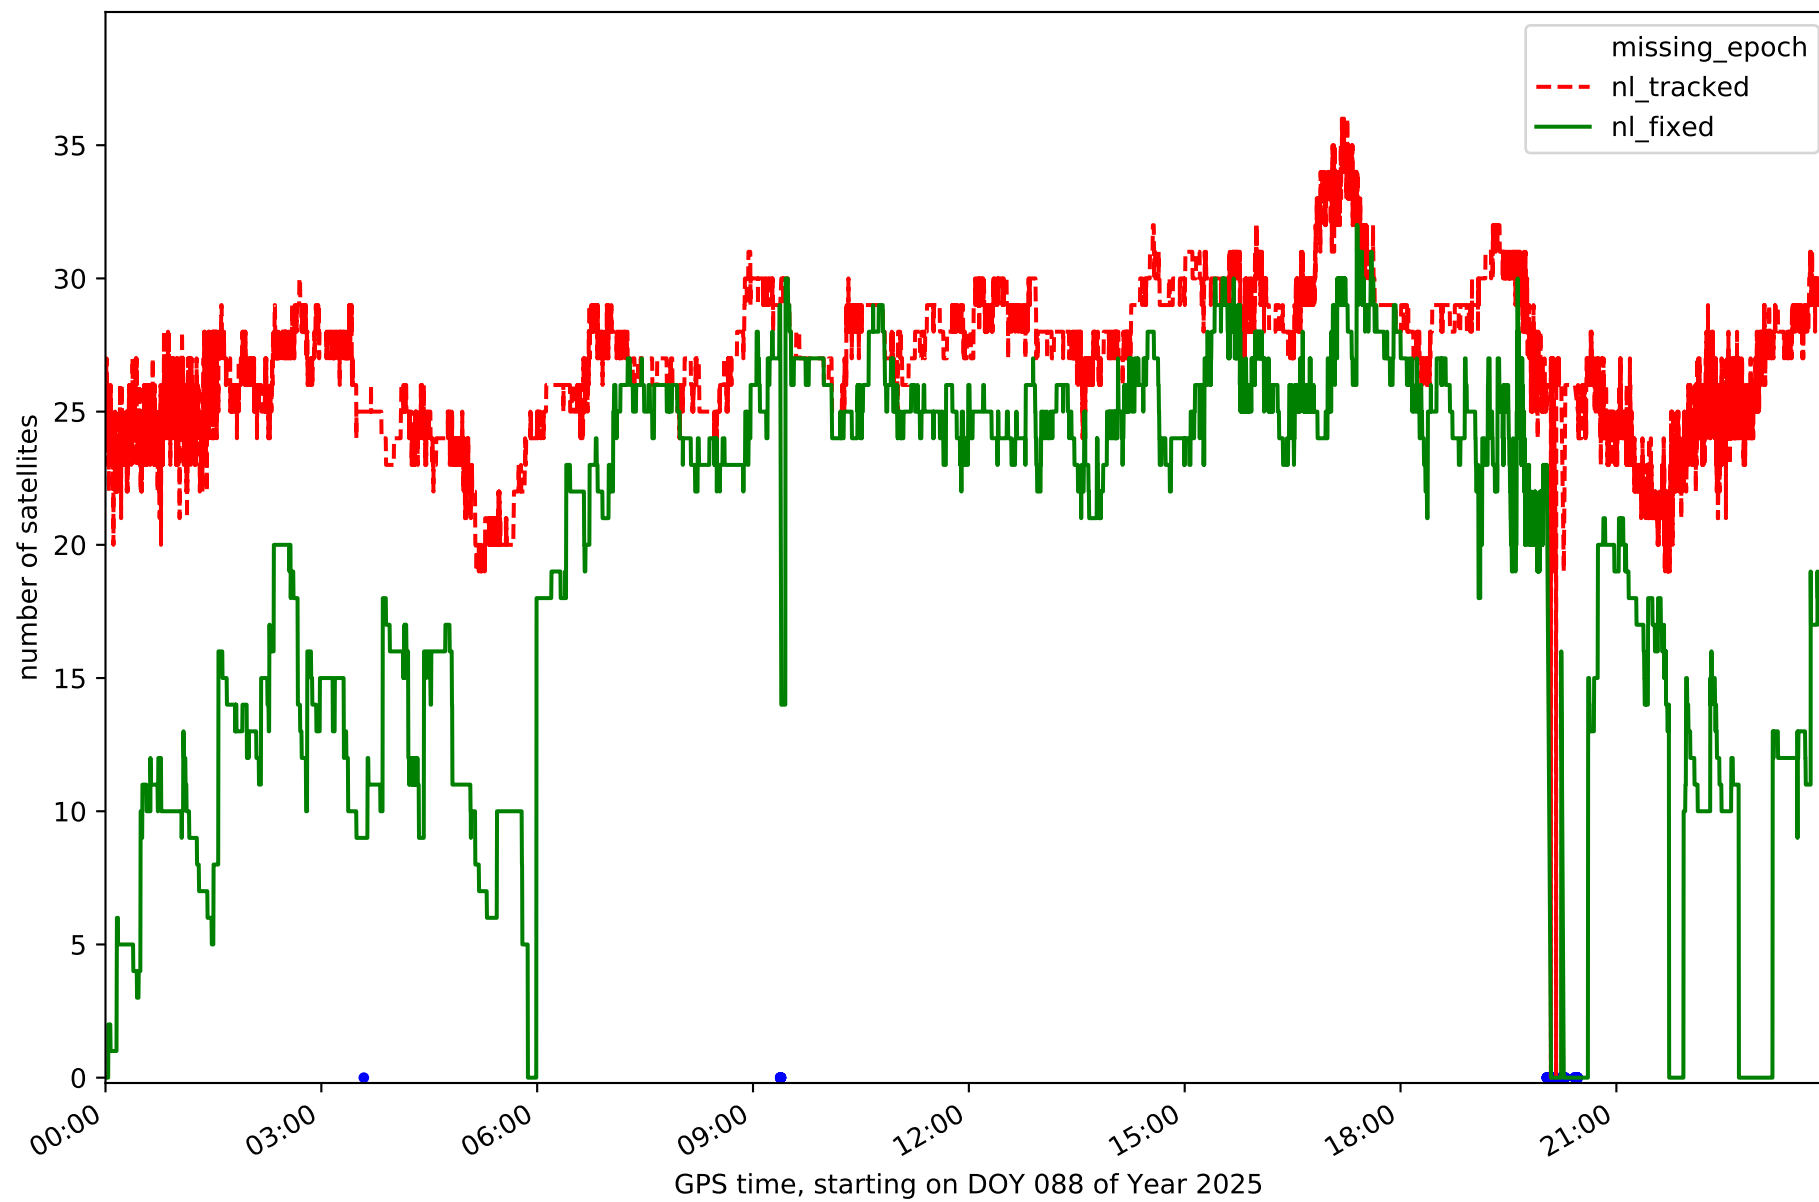


Station LP03 in network NT32

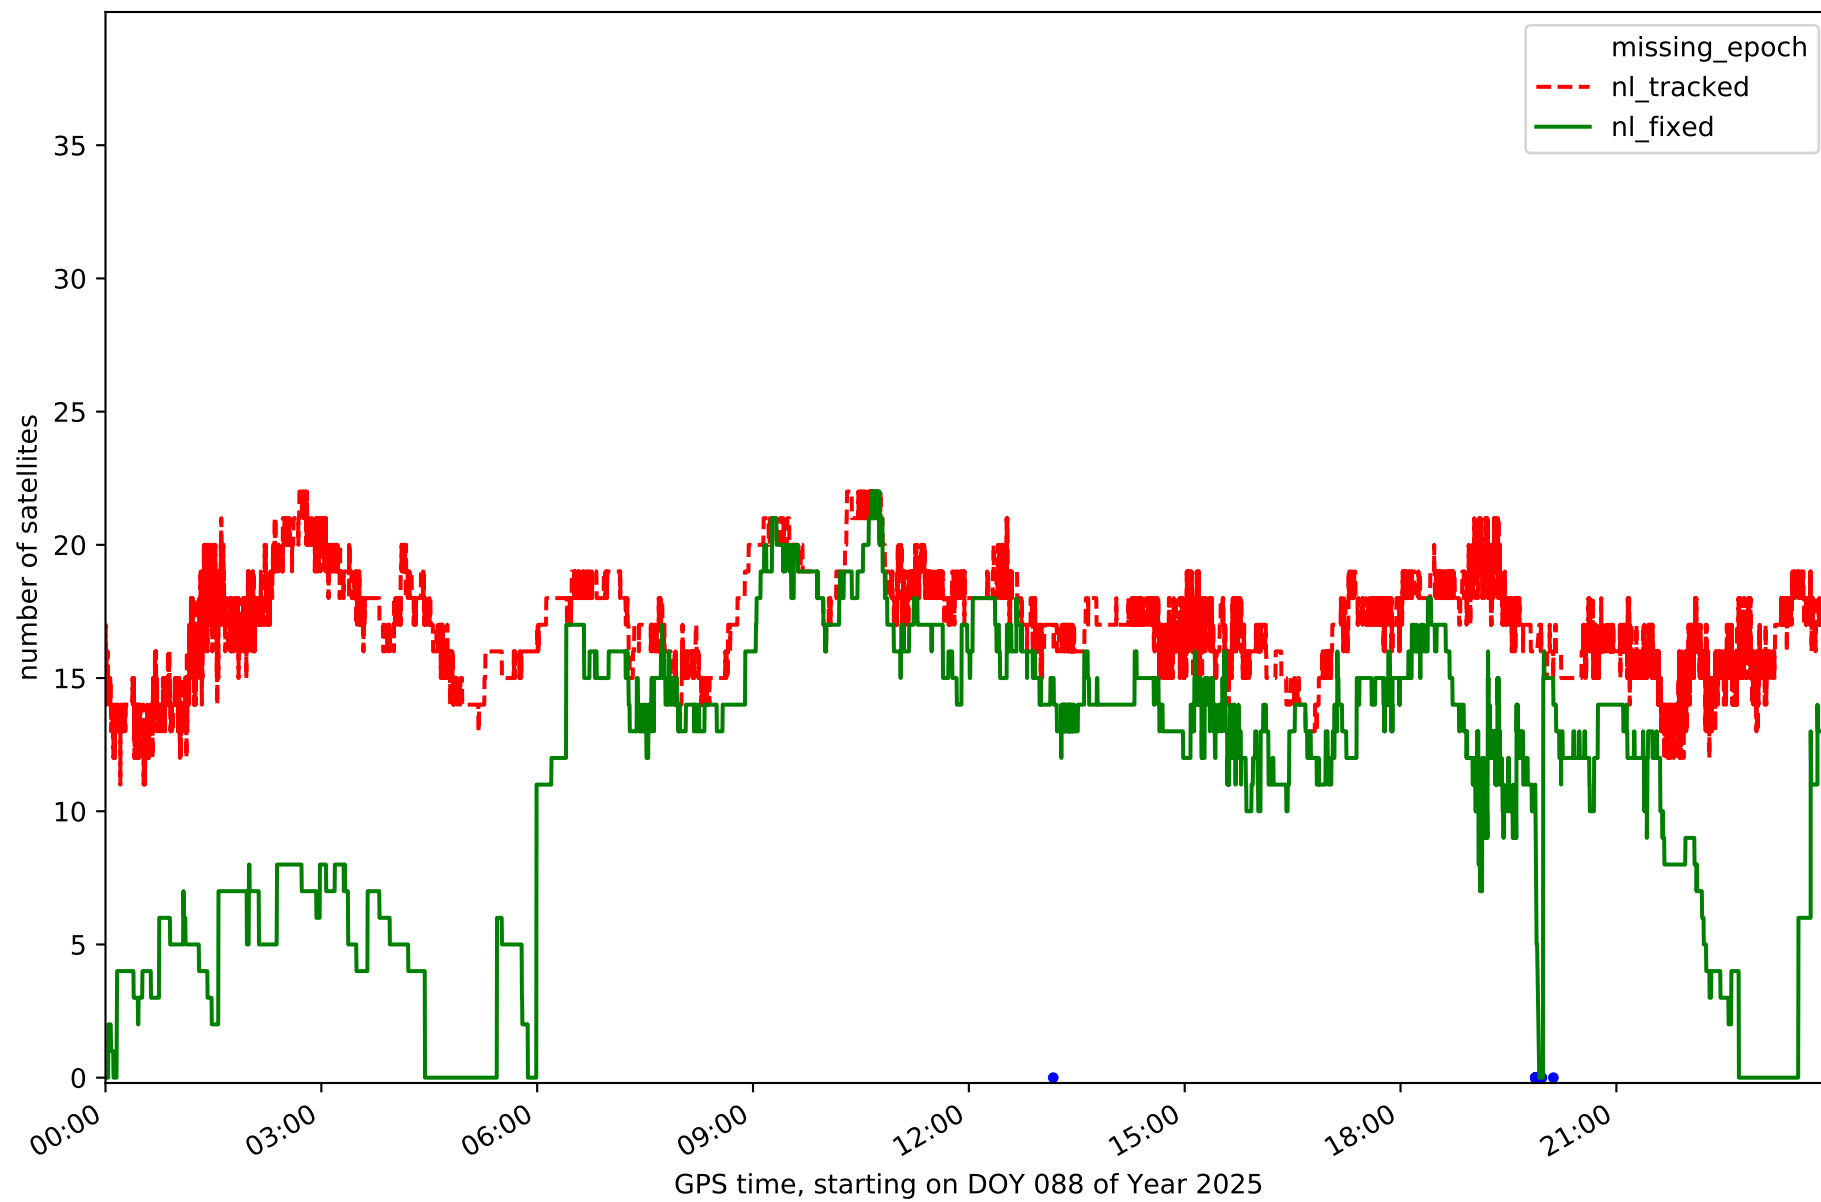


Station LPAL in network NT32

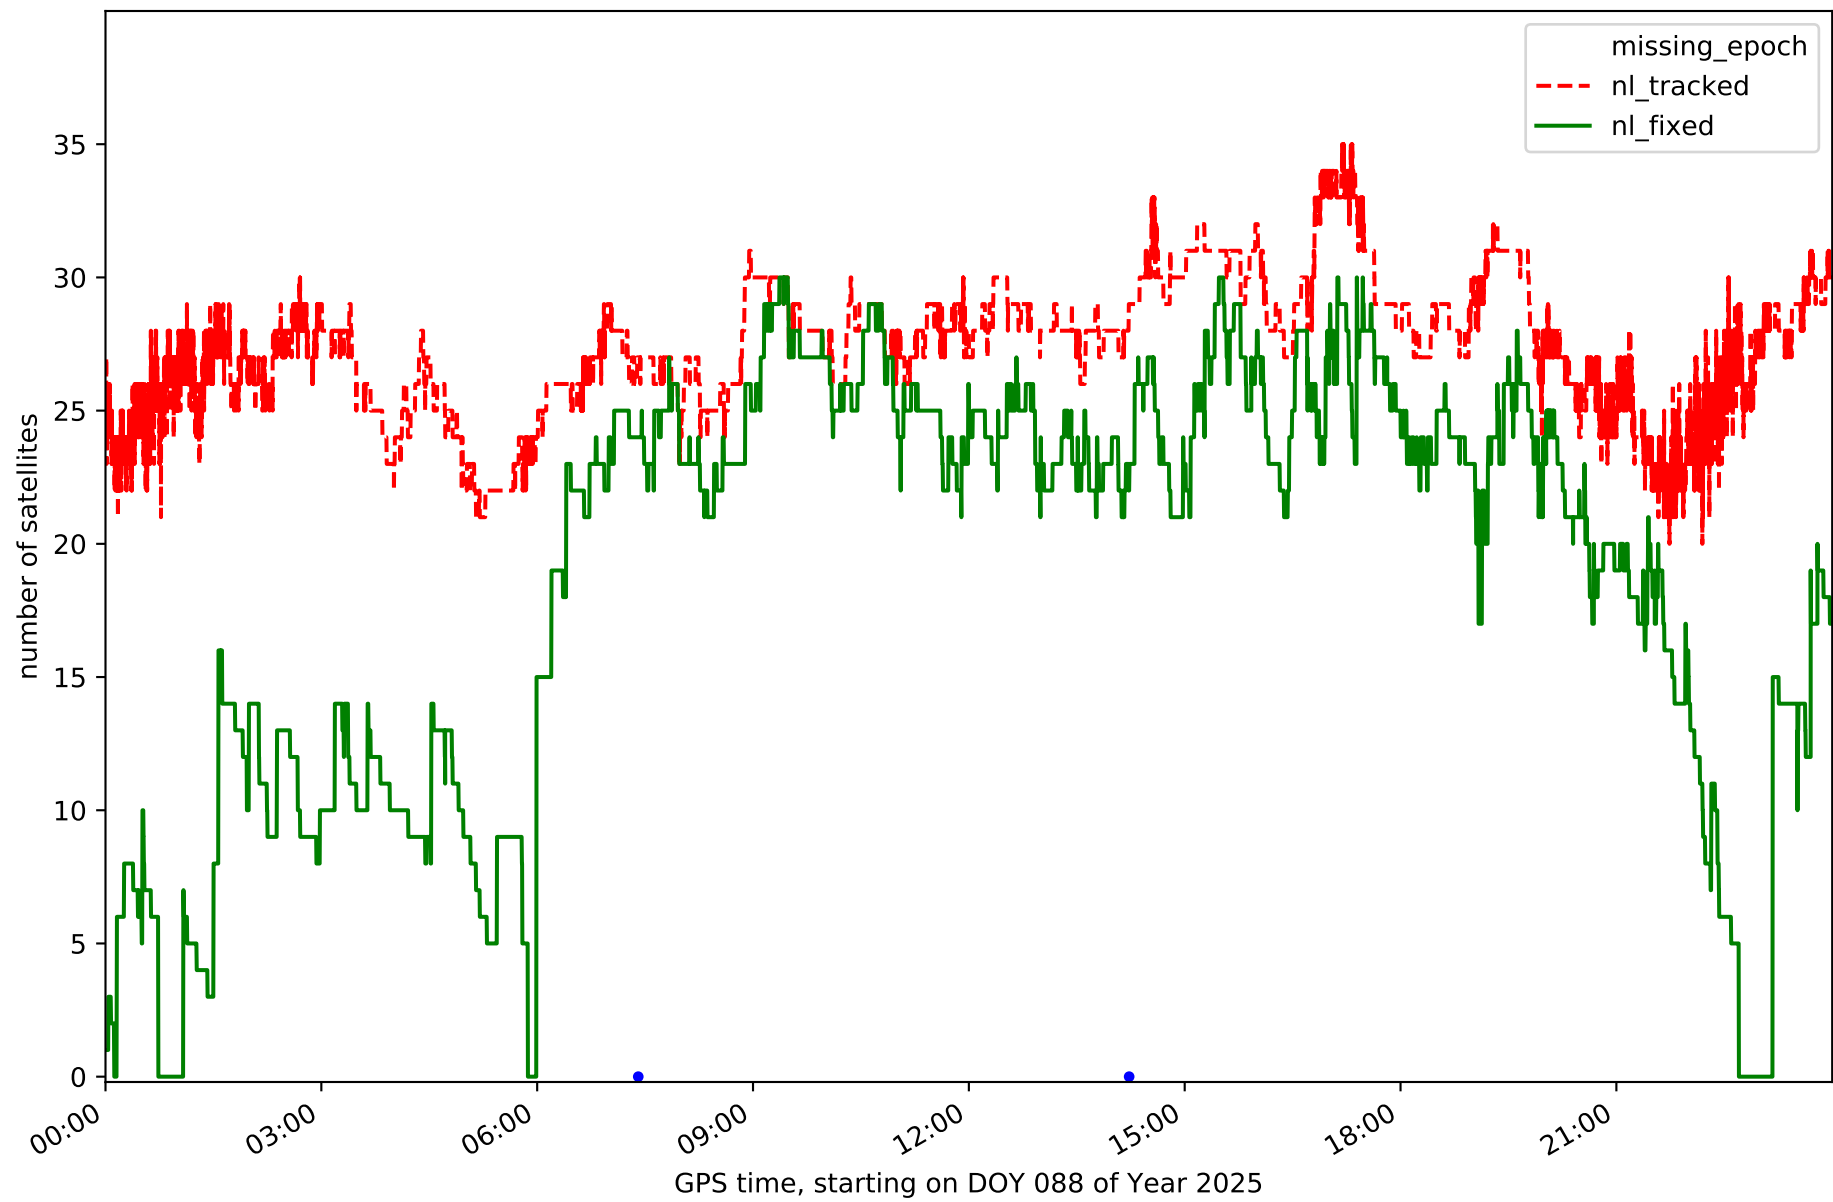


Station LRES in network NT32

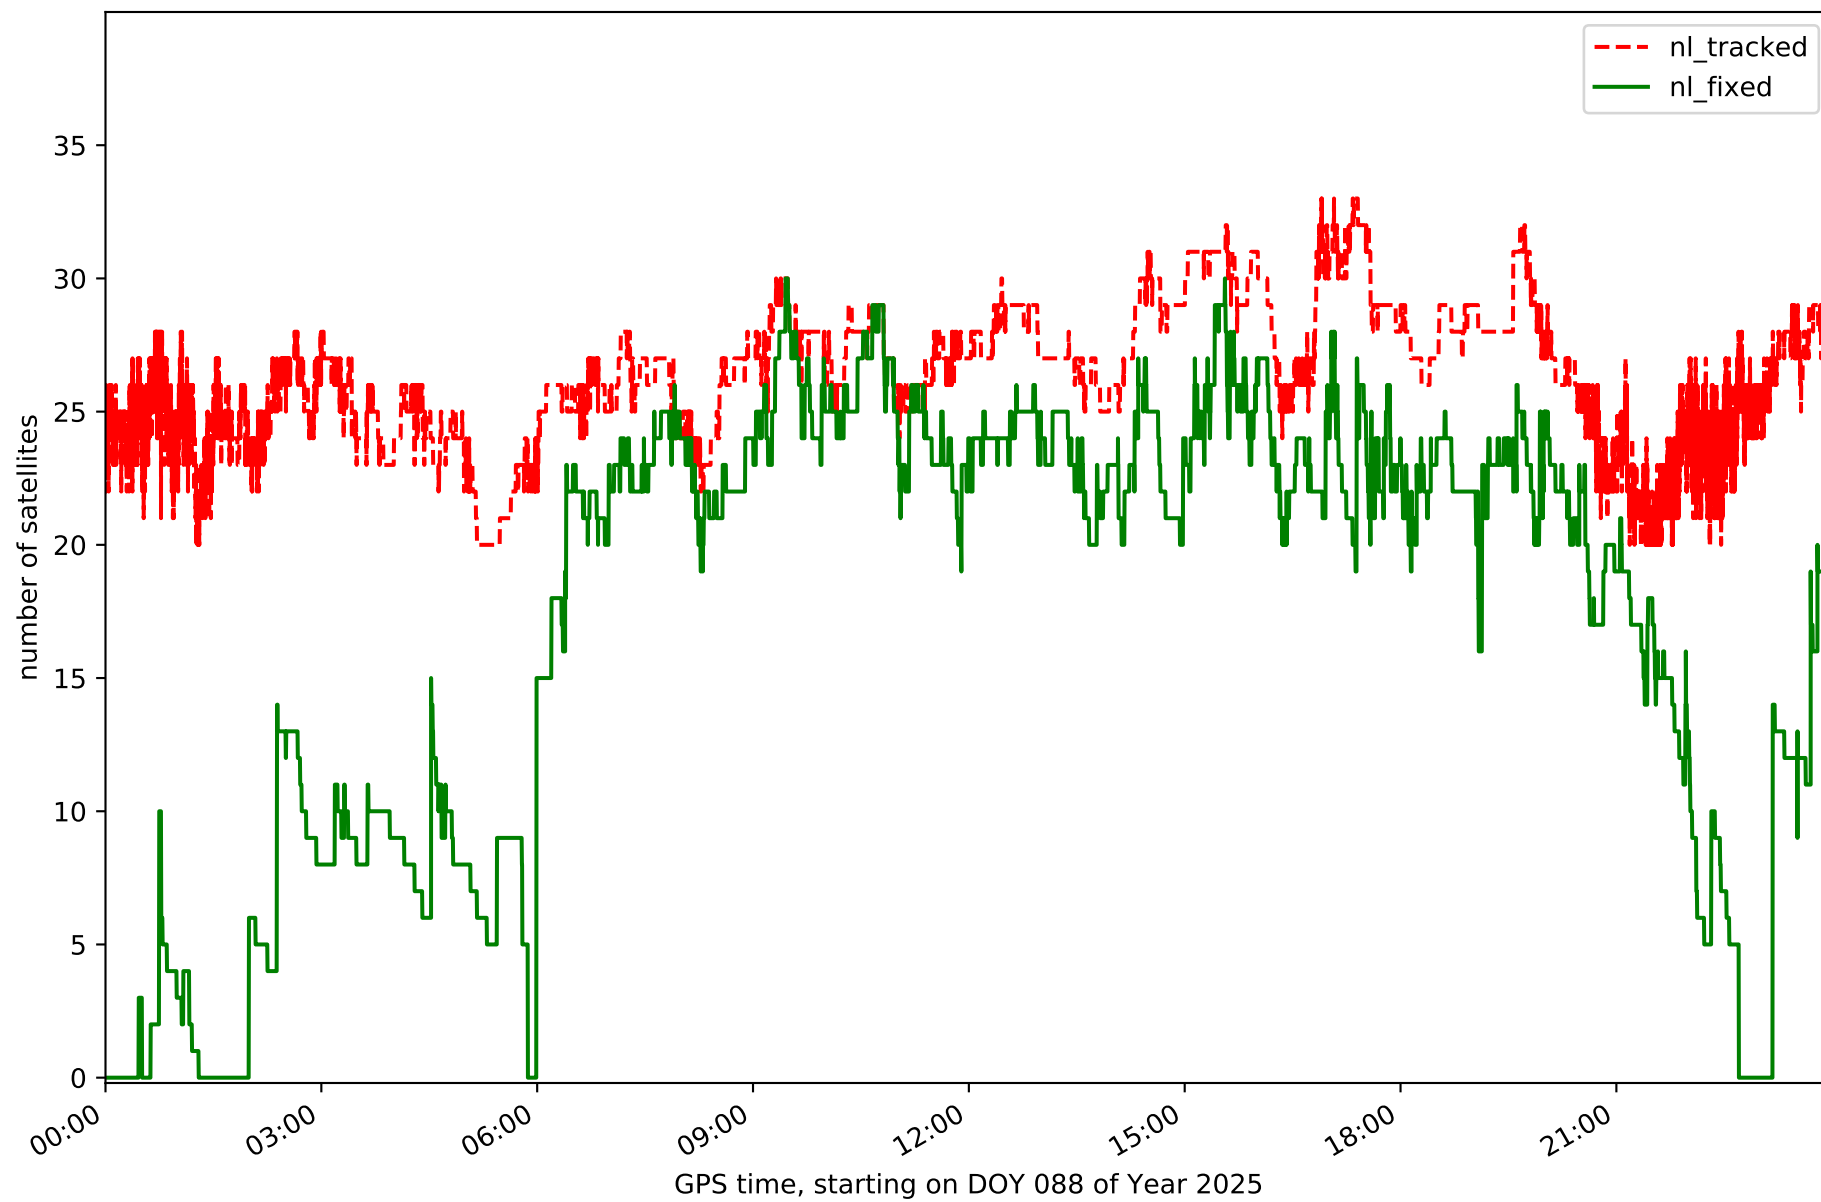


Station TN01 in network NT32

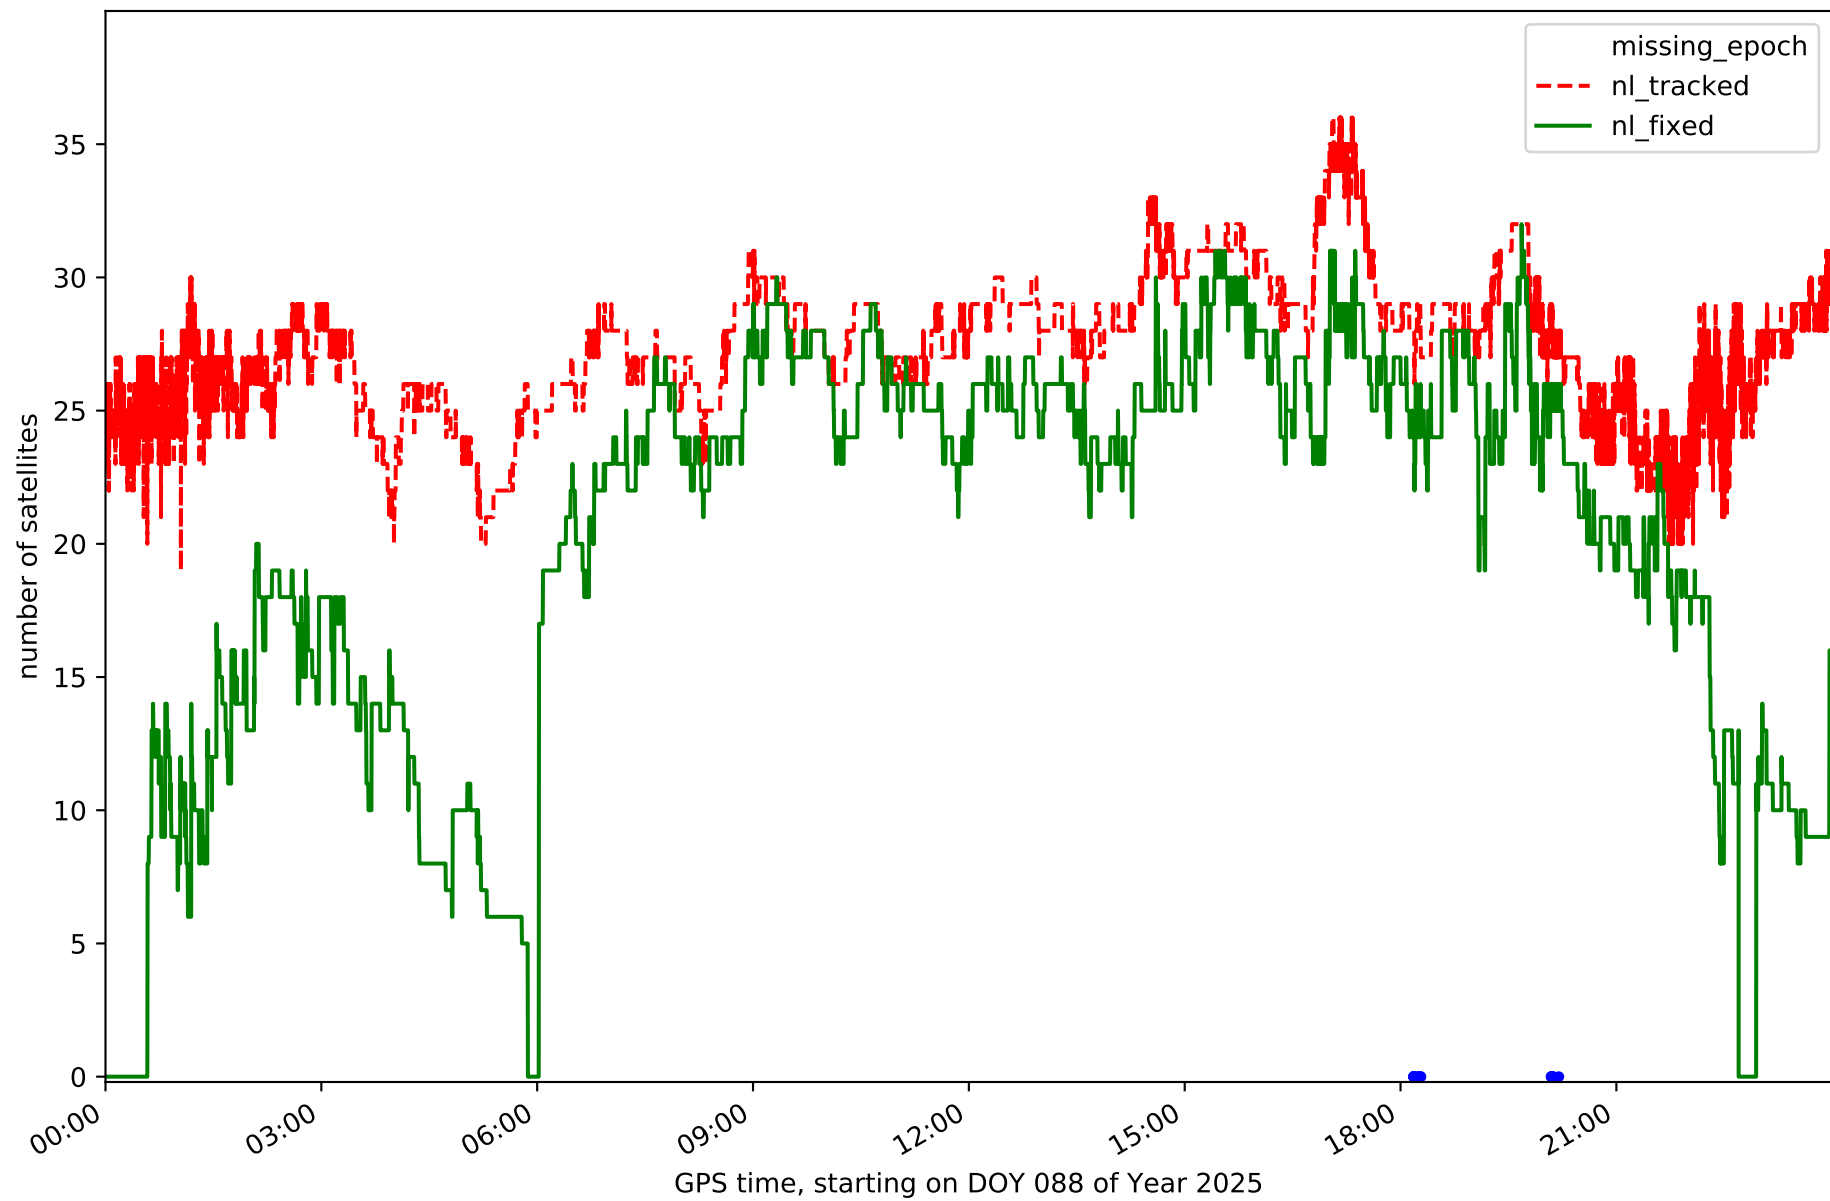


Station TN02 in network NT32

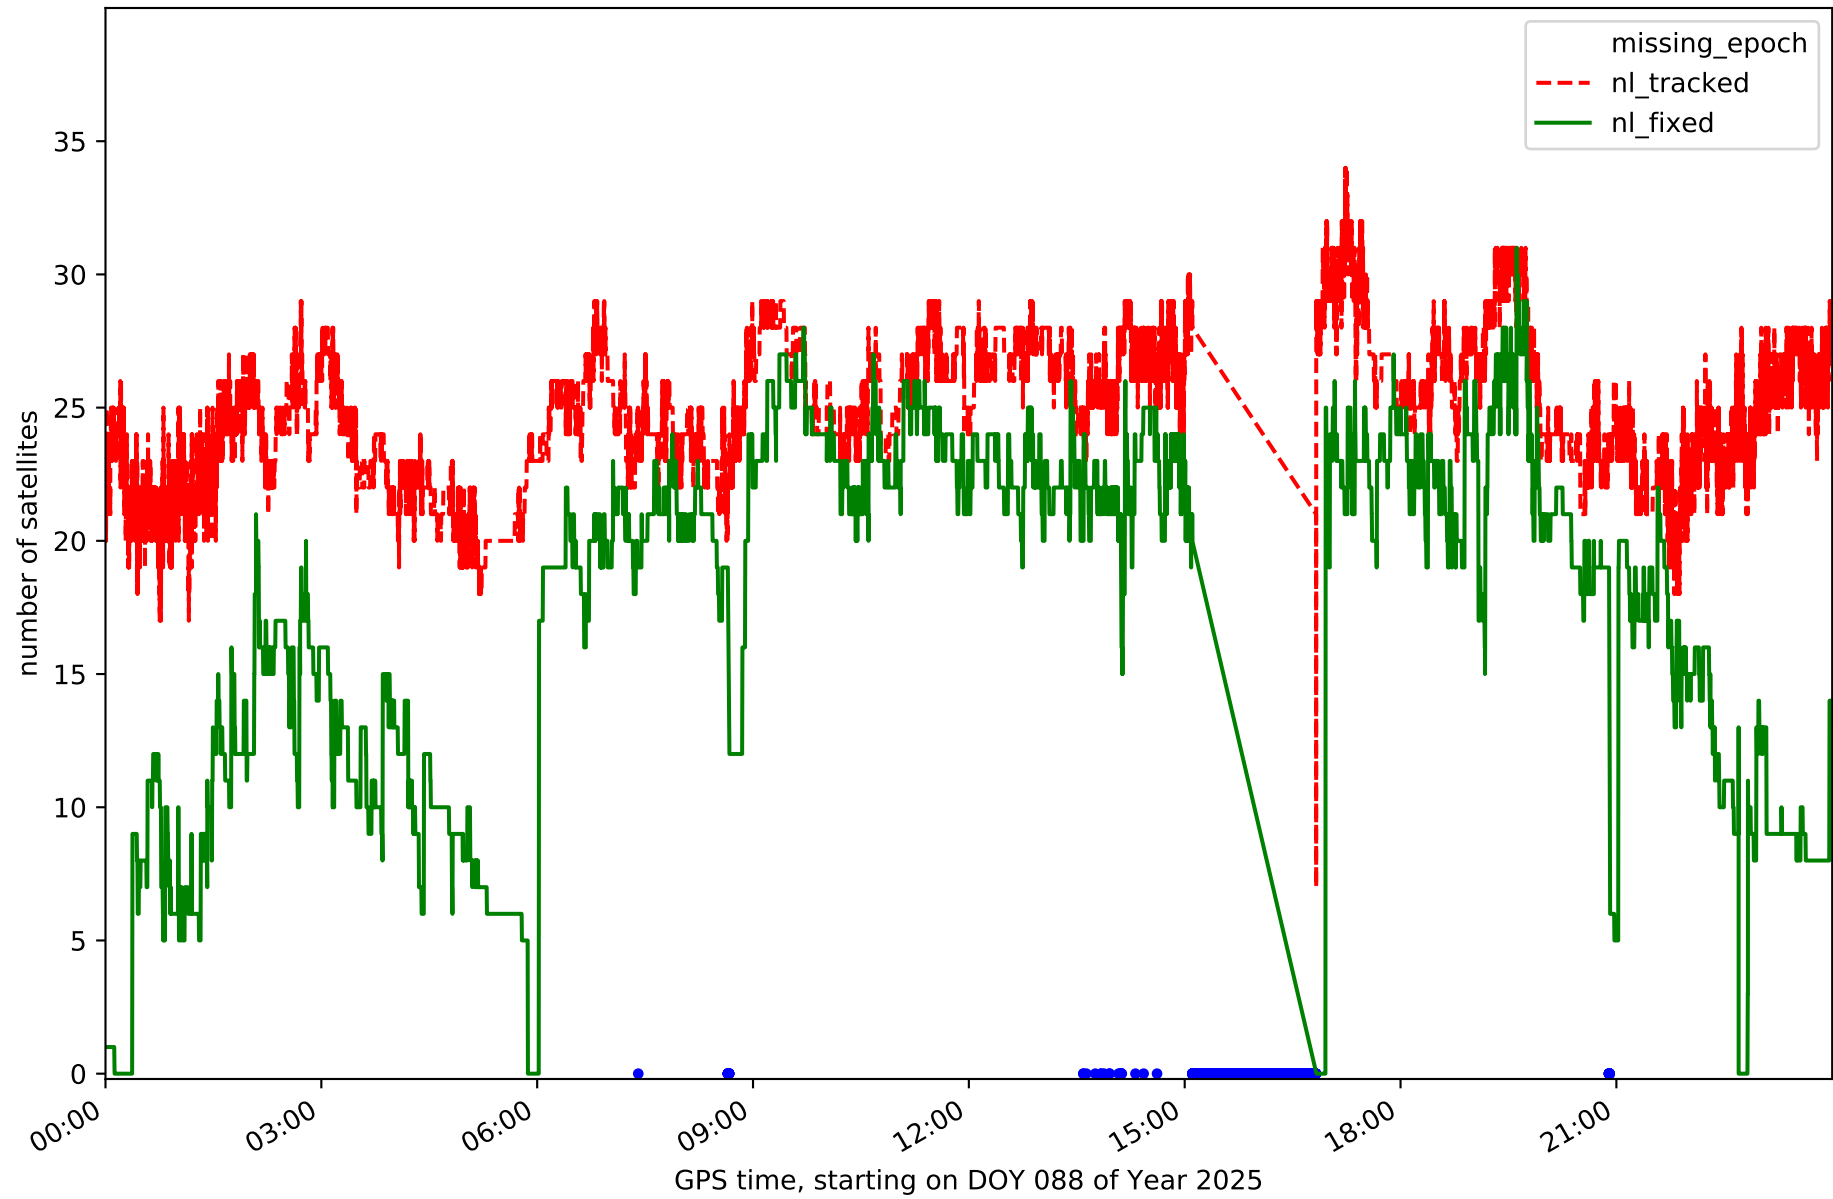


Station TN03 in network NT32

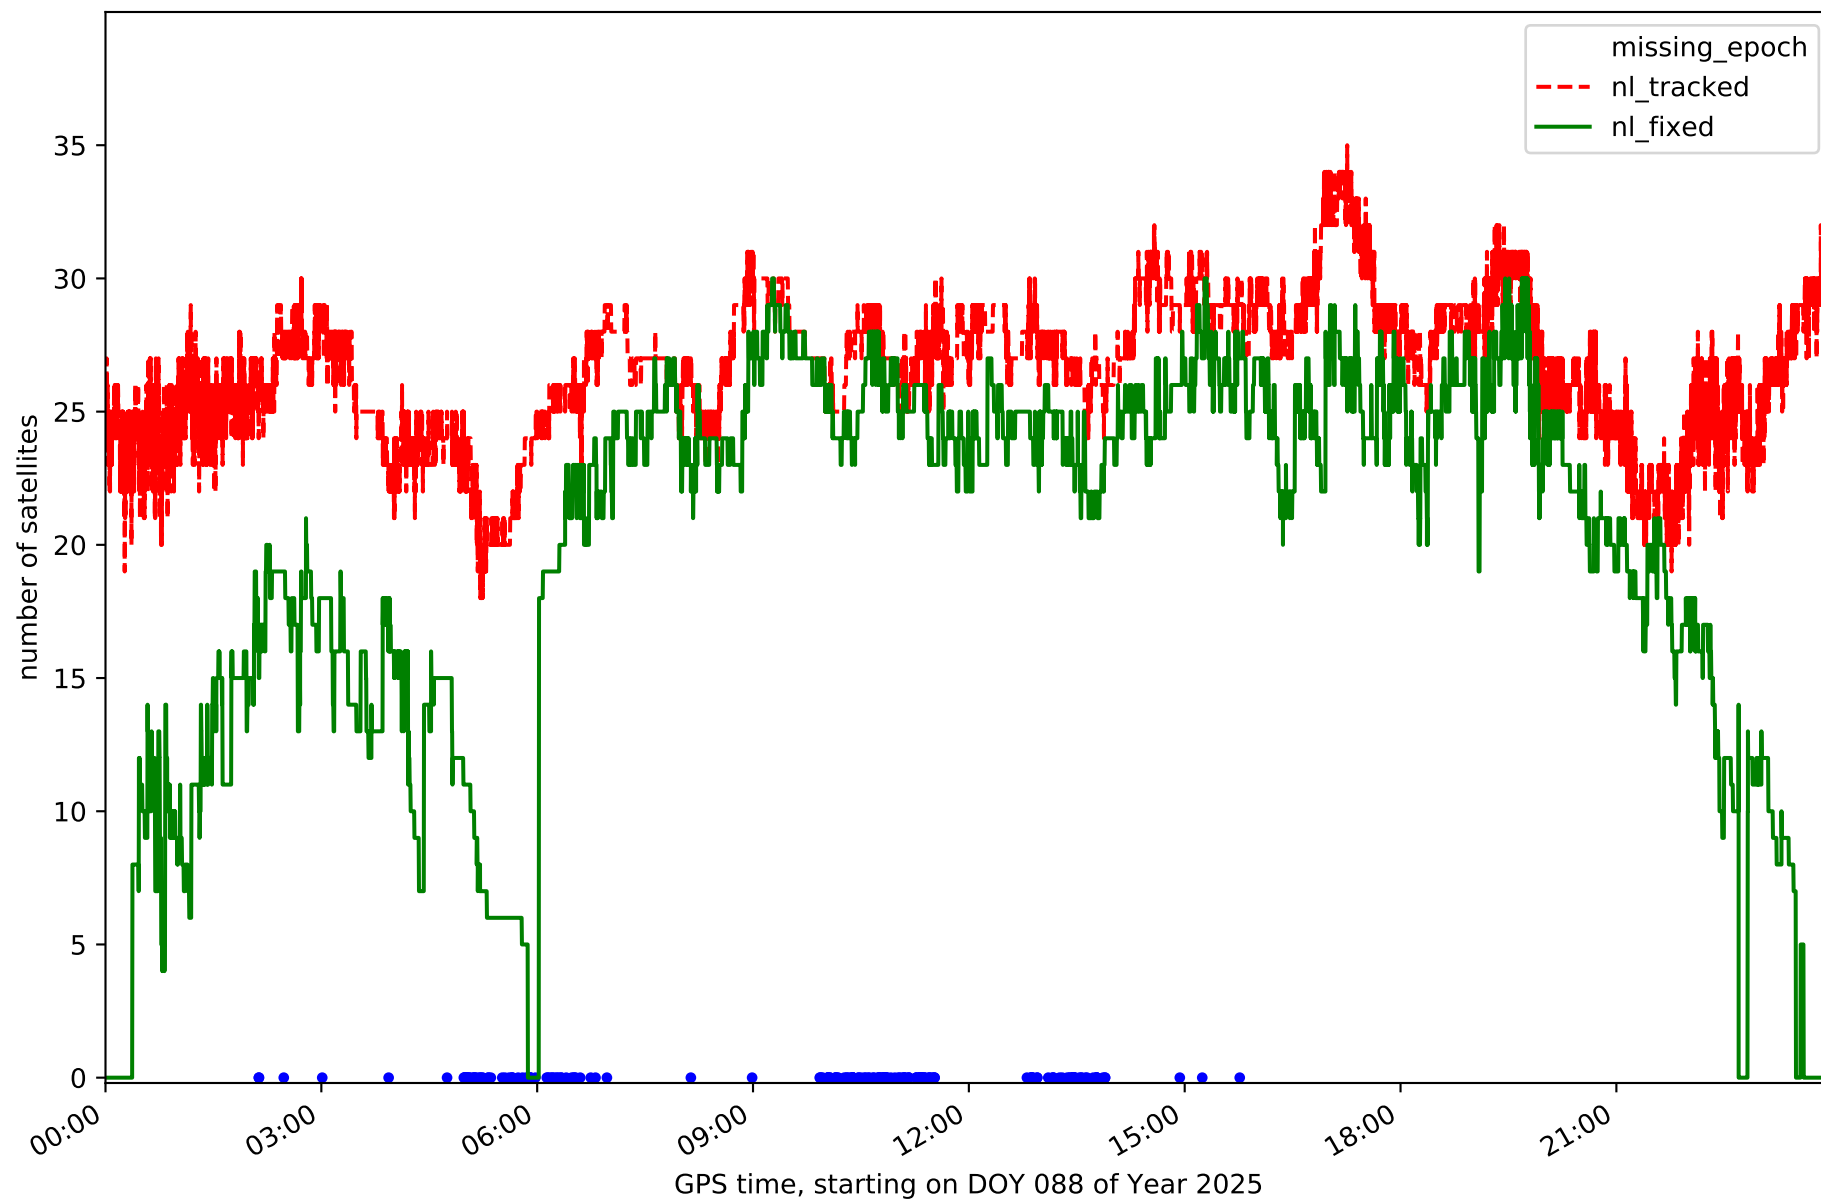


Station TN06 in network NT32

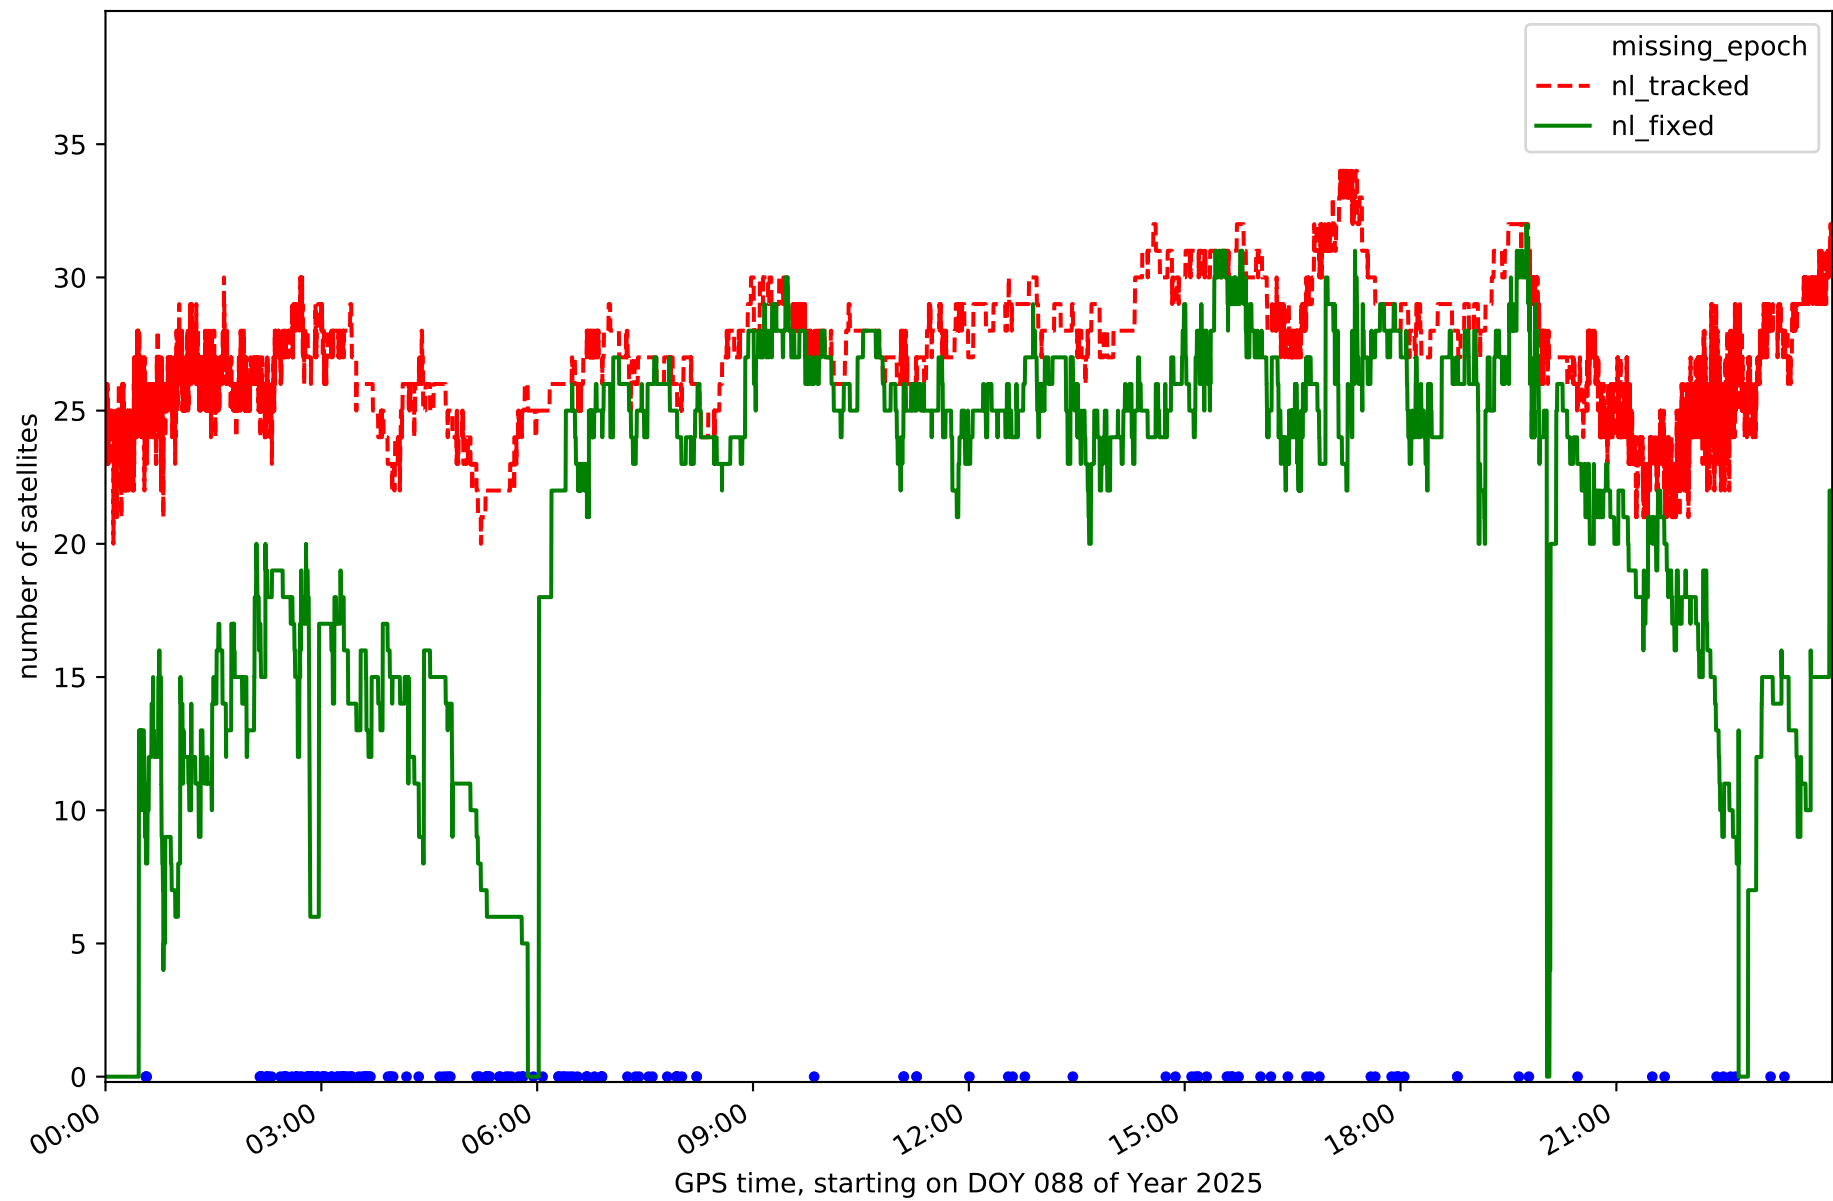


Station TN09 in network NT32

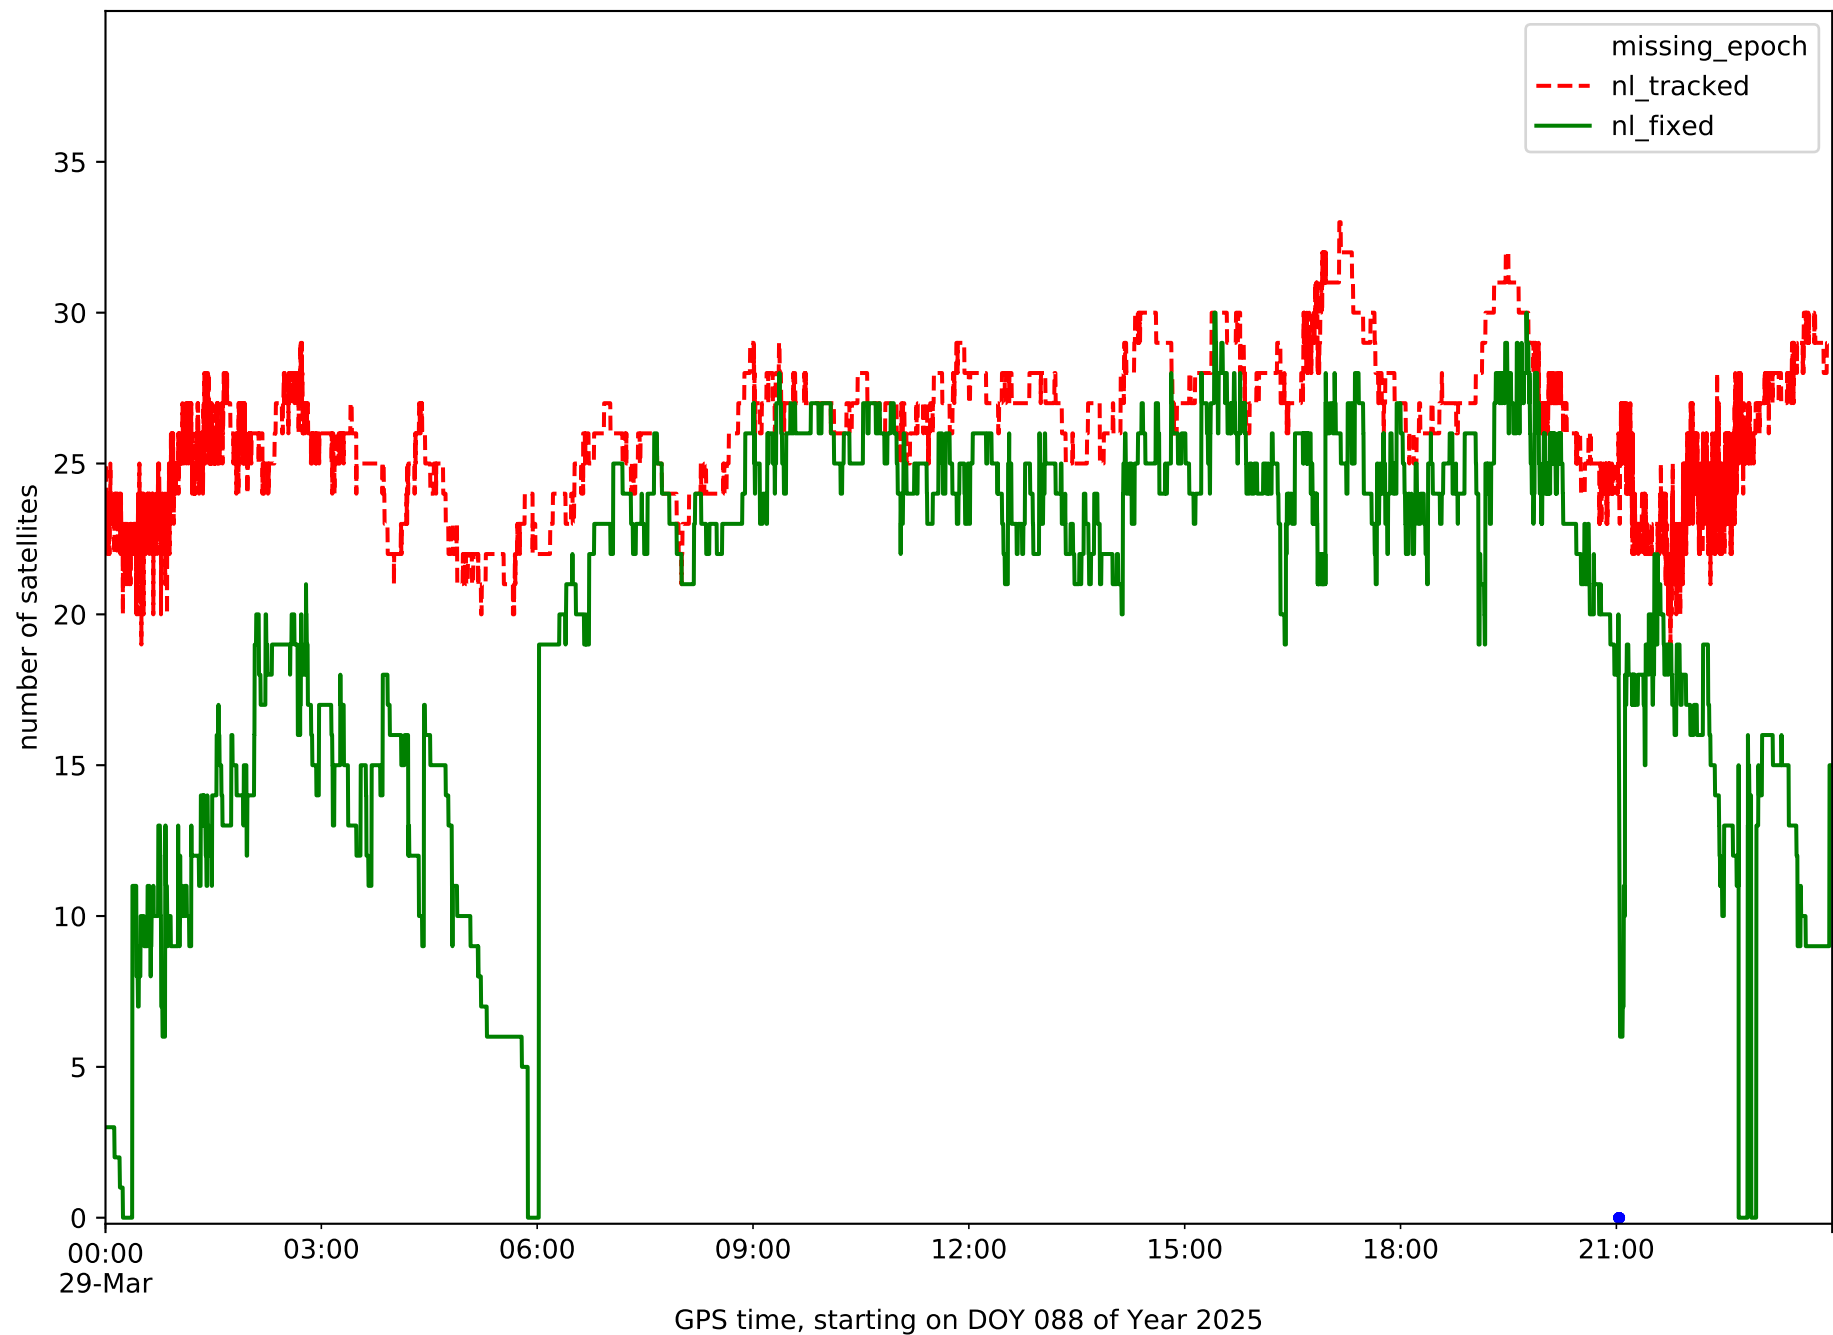


Station TE11 in network NT32

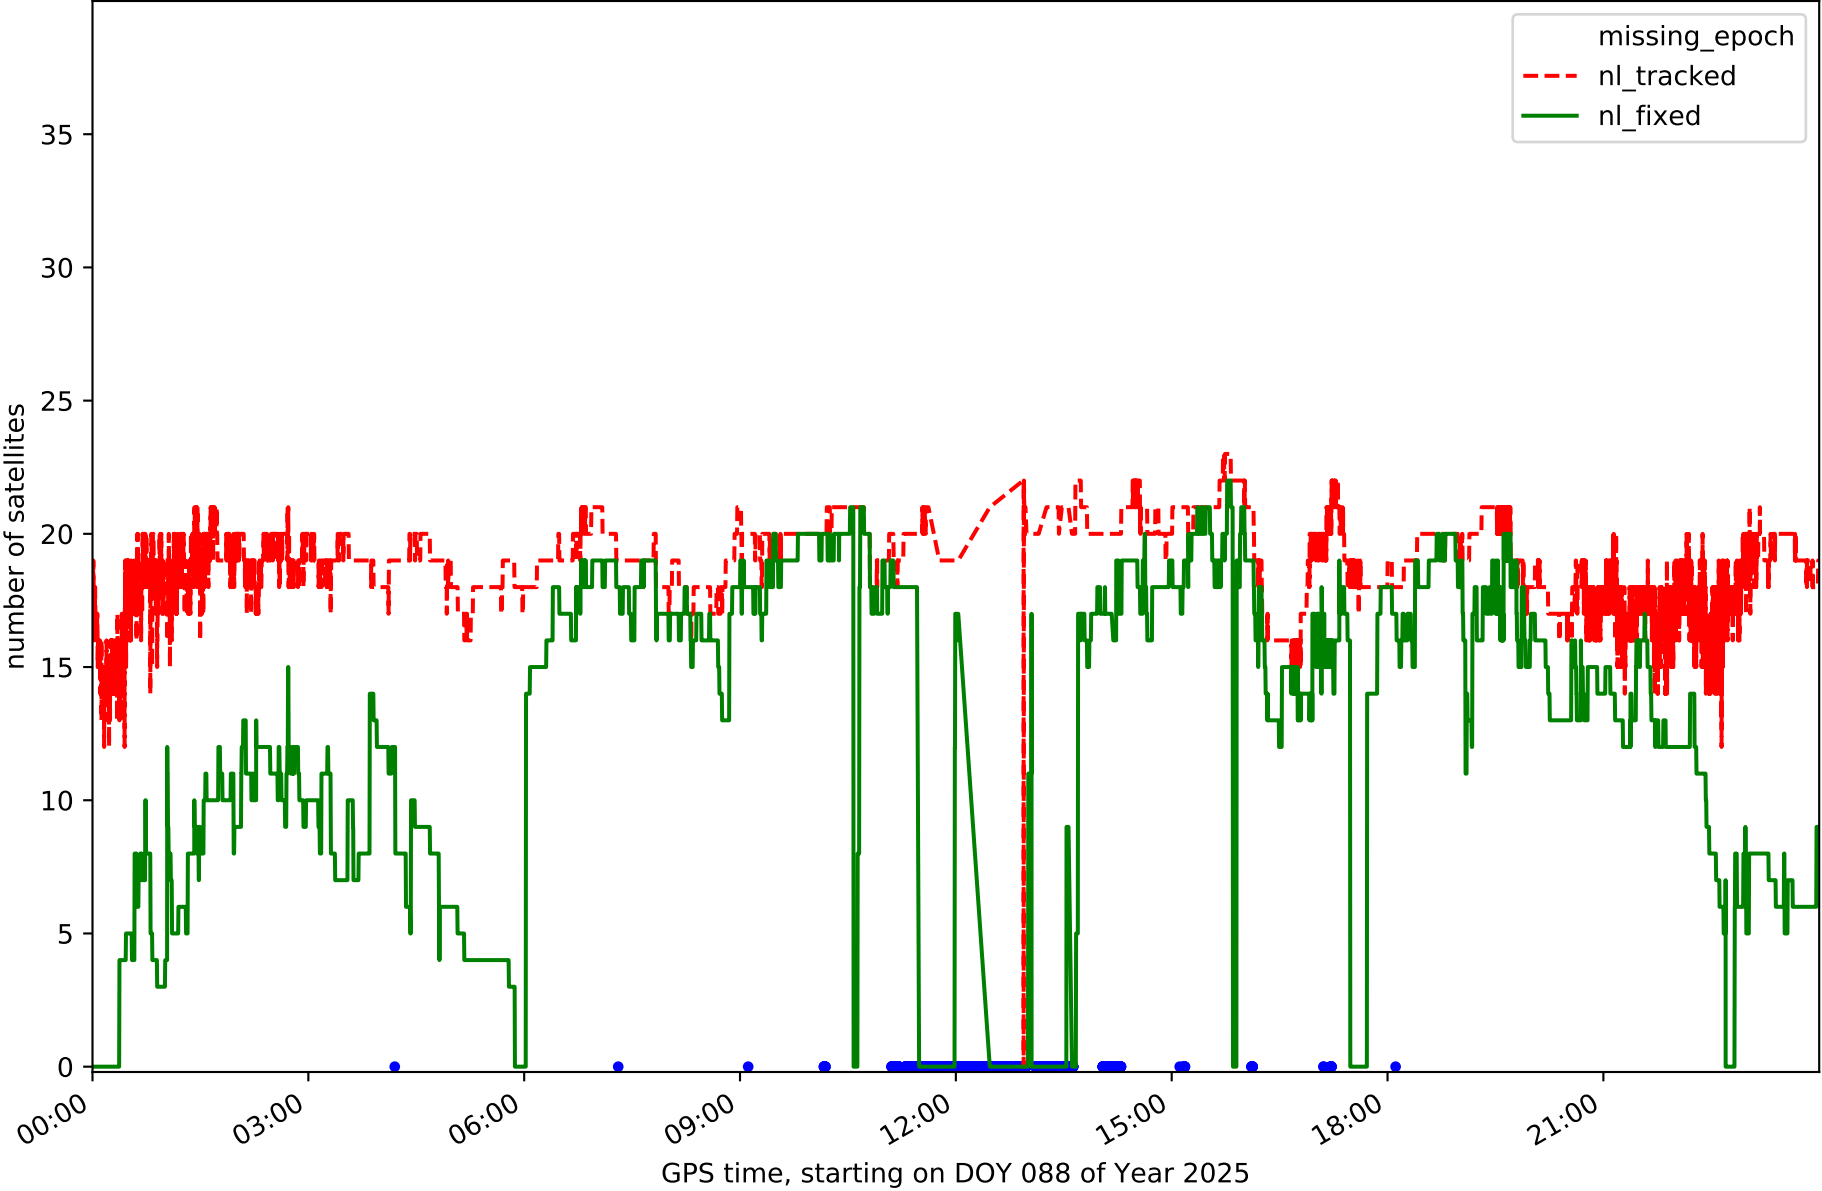


RefCheck for station EH01 in network NT32

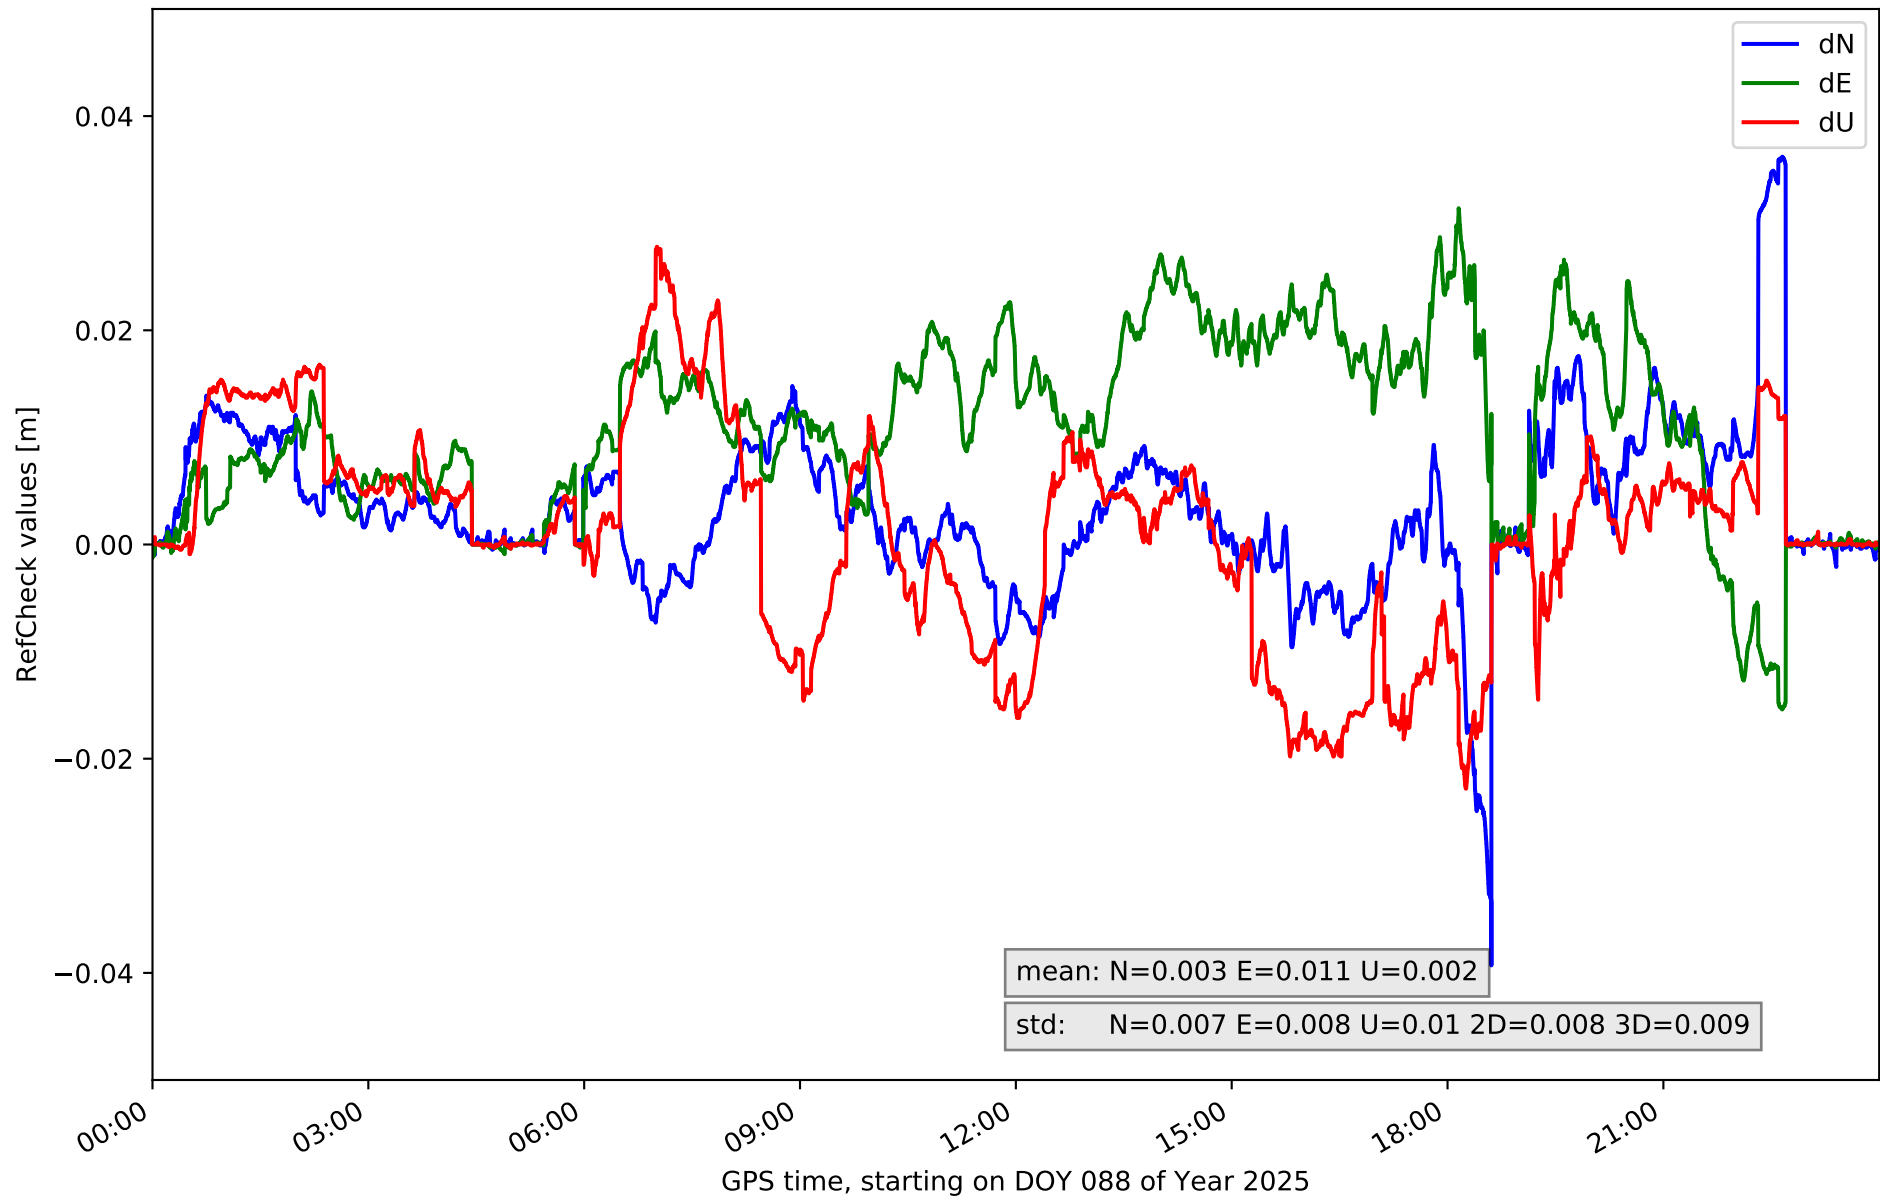


RefCheck for station EH02 in network NT32

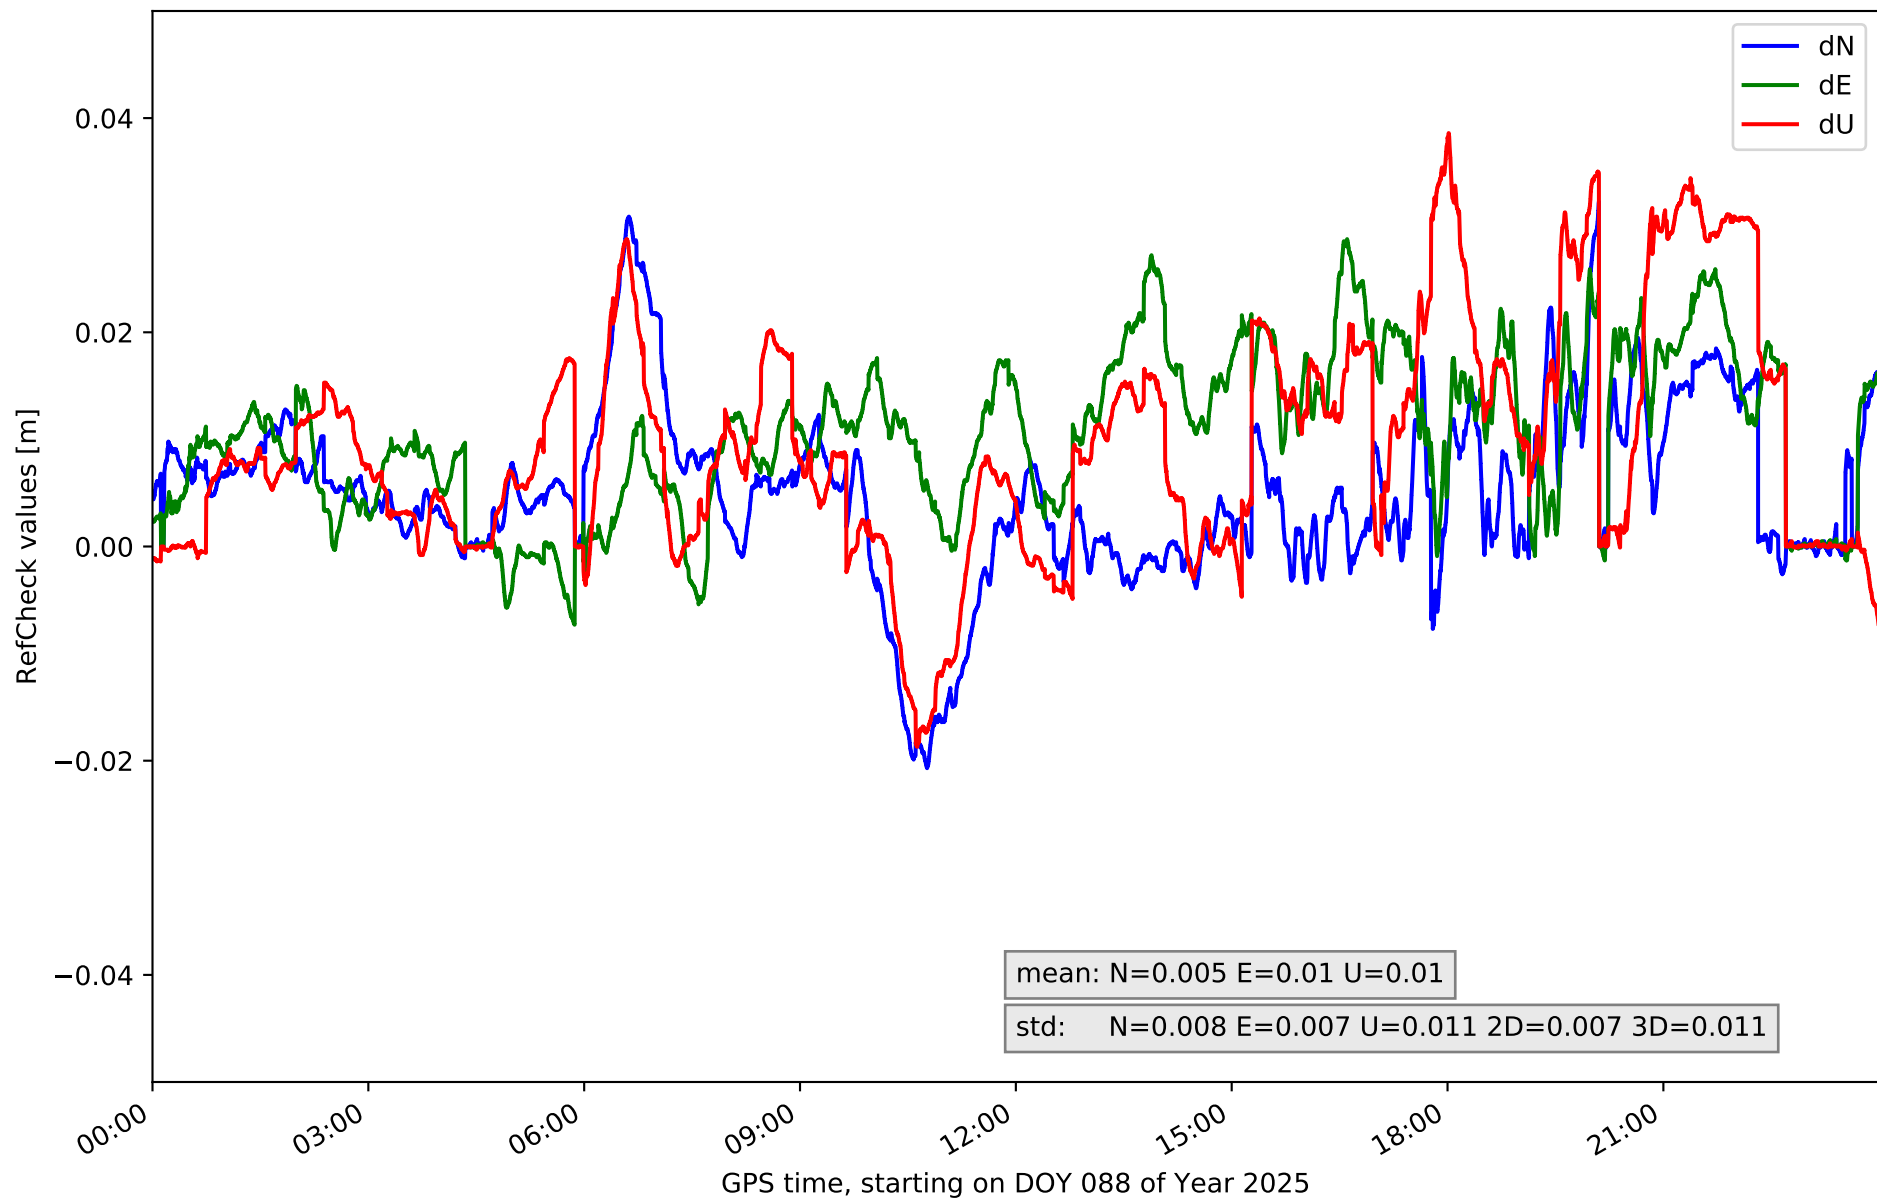


RefCheck for station GOM1 in network NT32

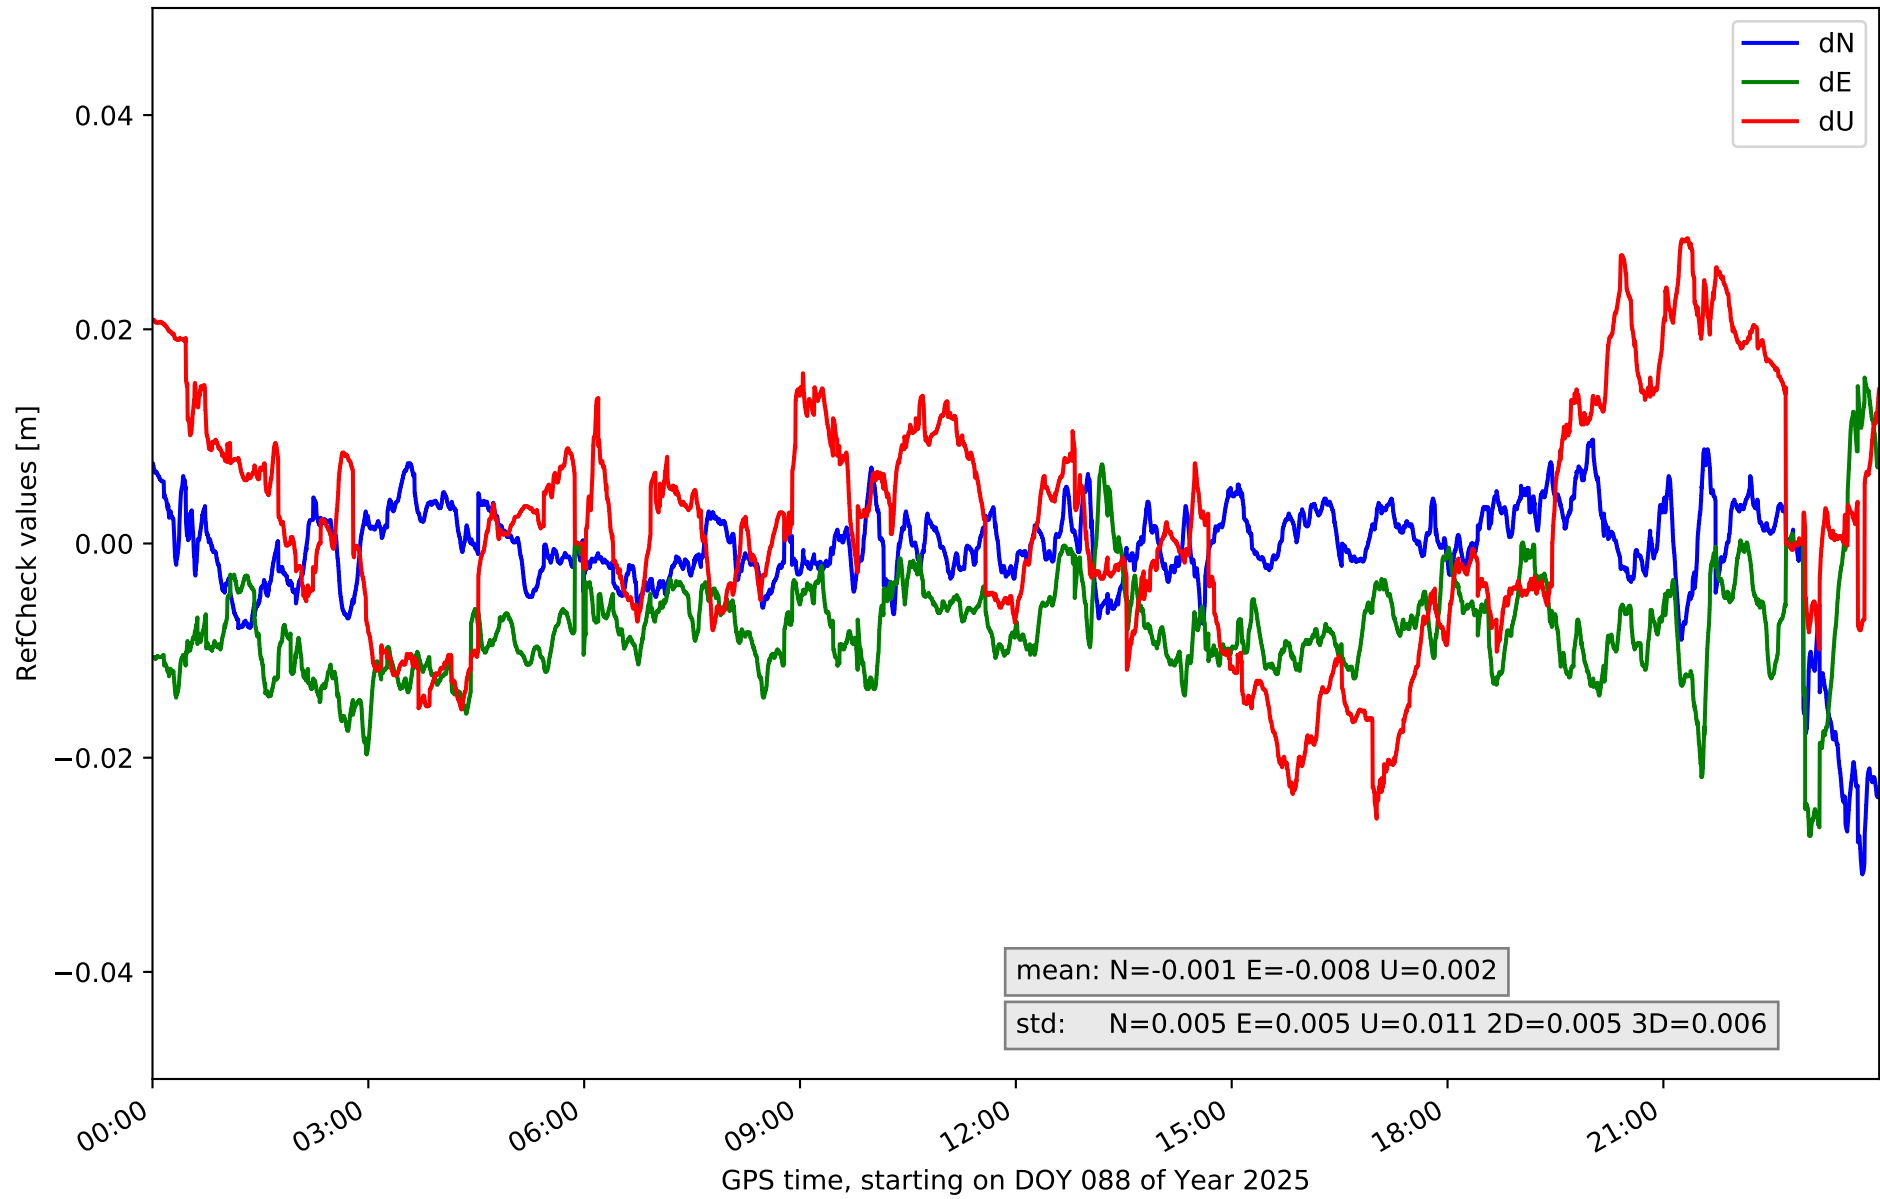


RefCheck for station IZAN in network NT32

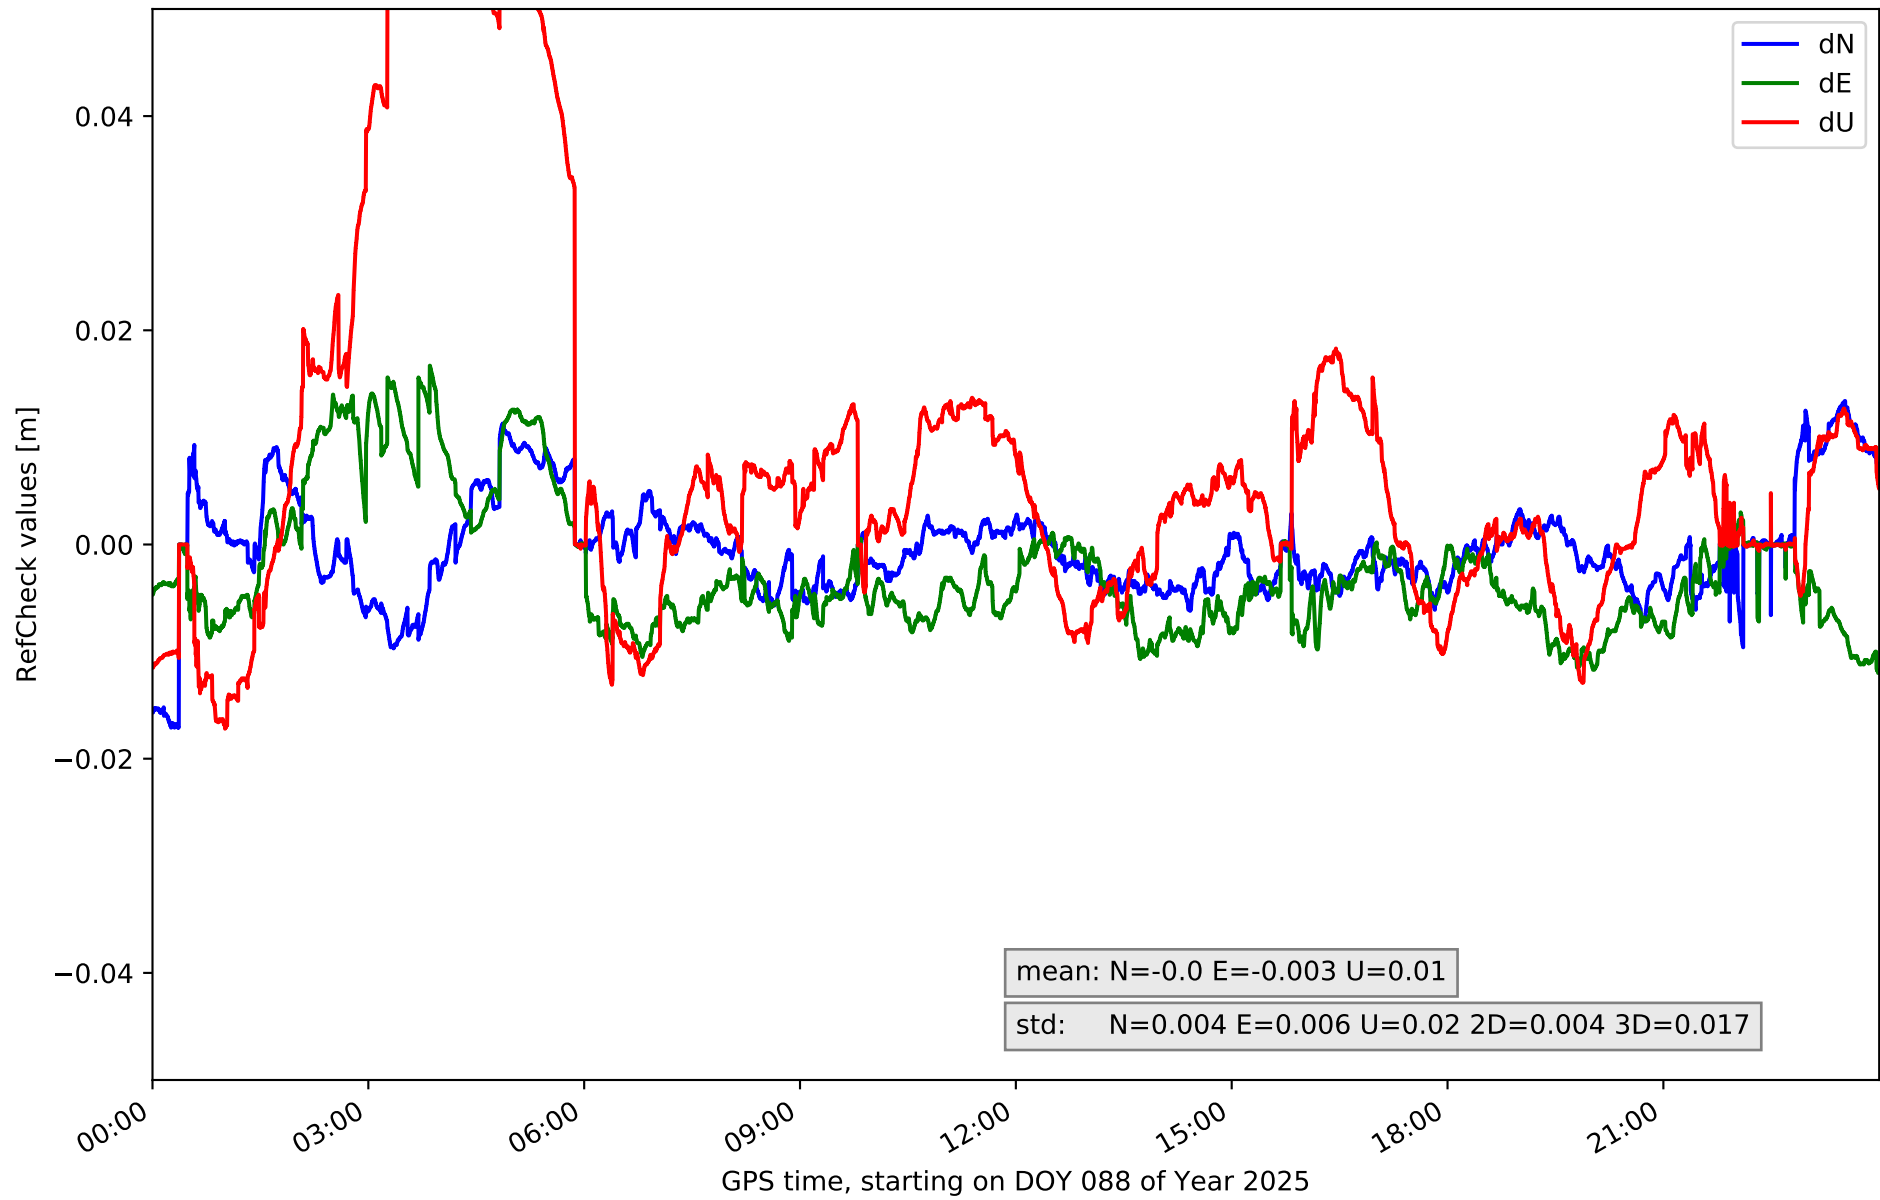


RefCheck for station LP01 in network NT32

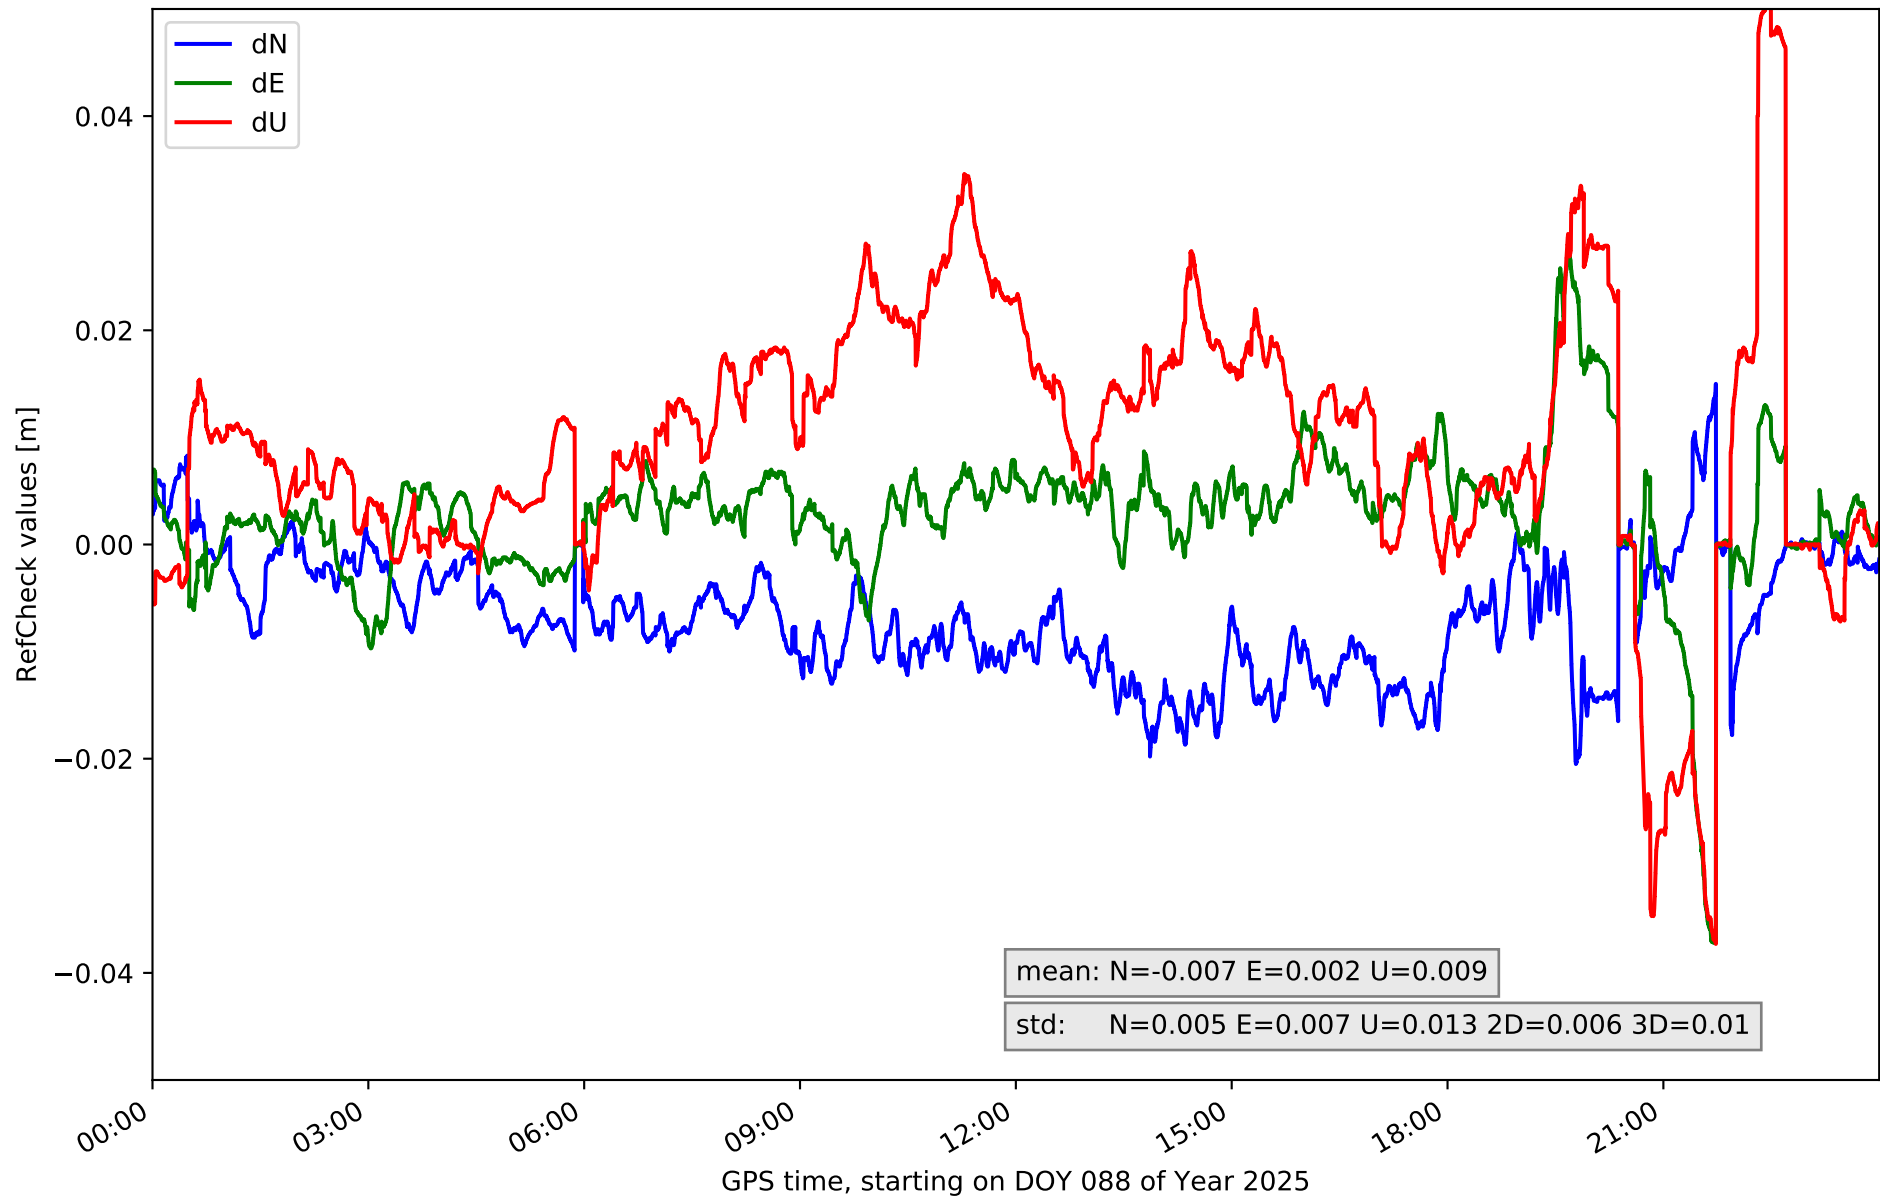


RefCheck for station LP03 in network NT32

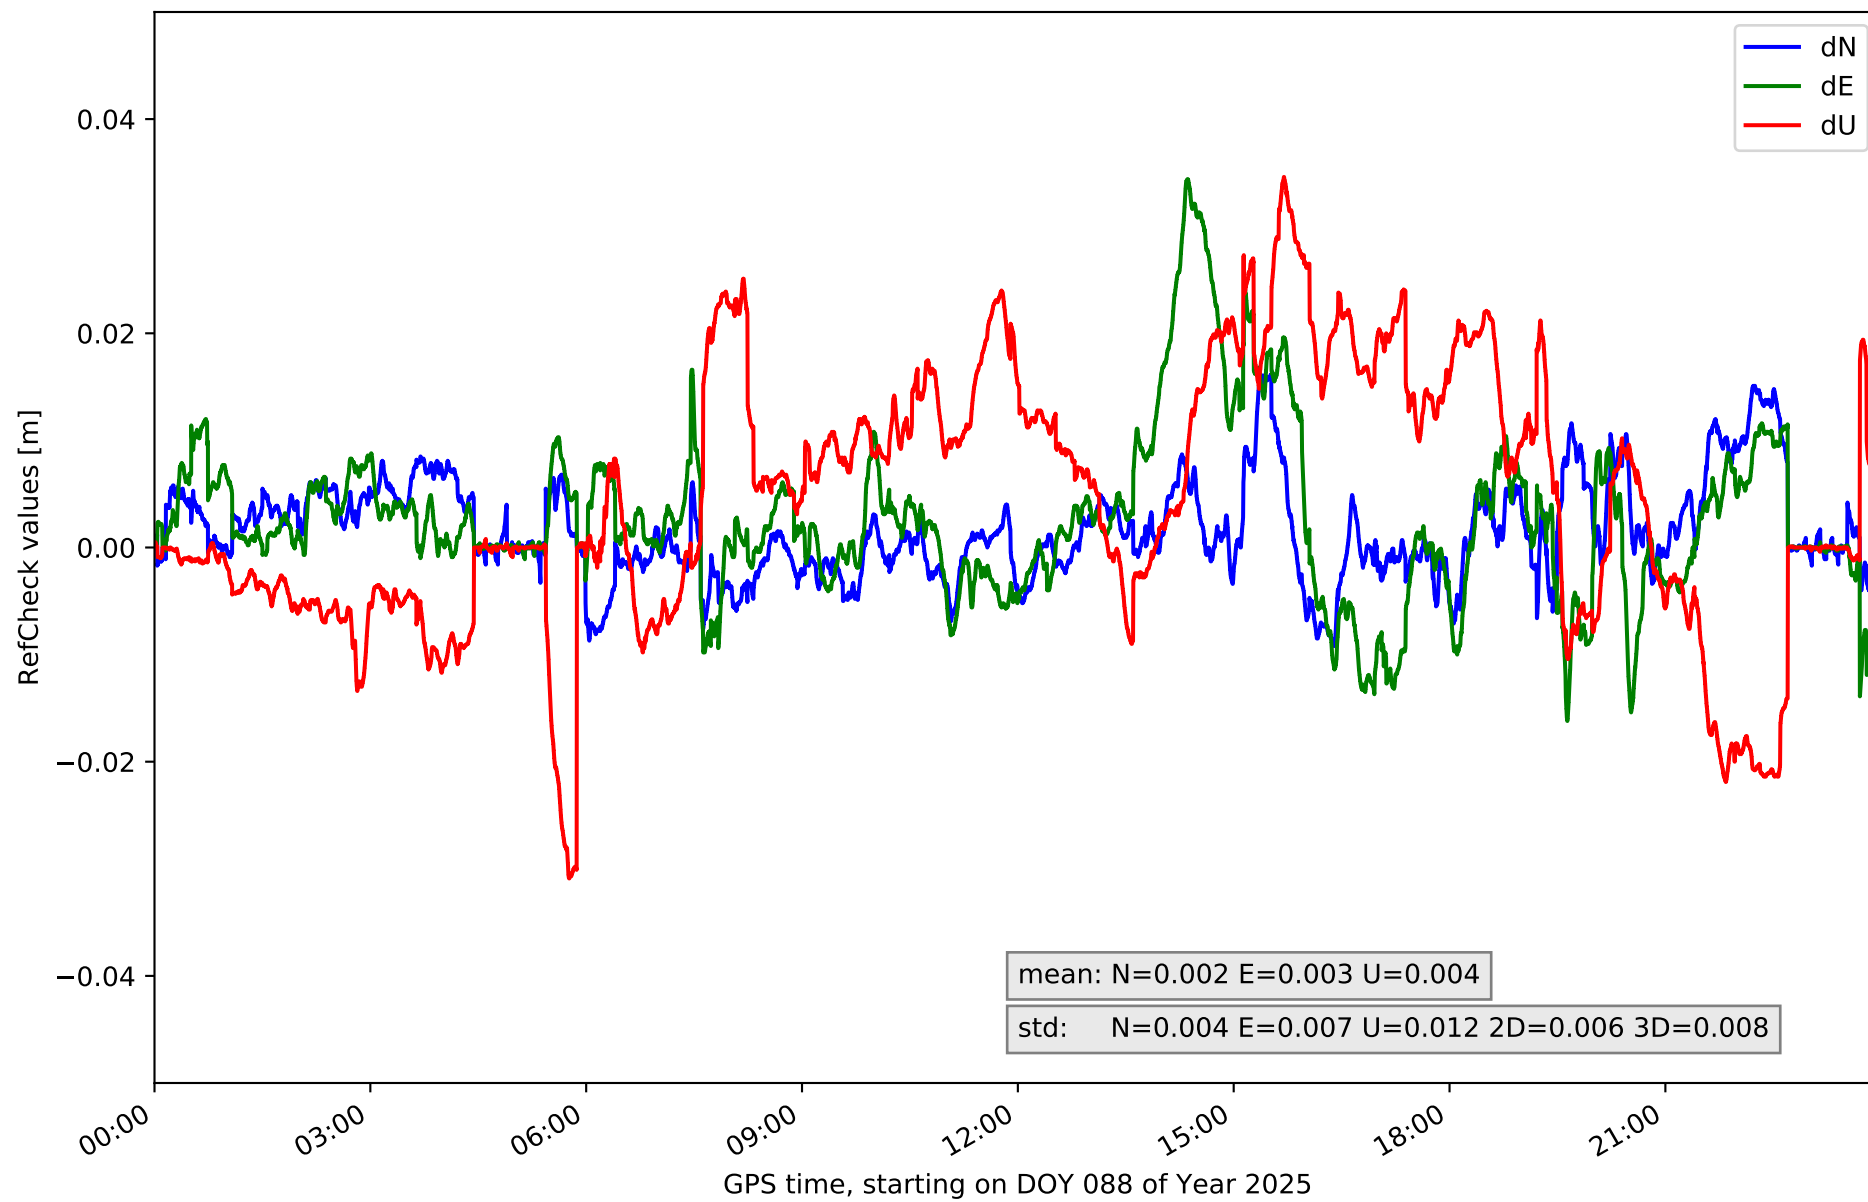


RefCheck for station LPAL in network NT32

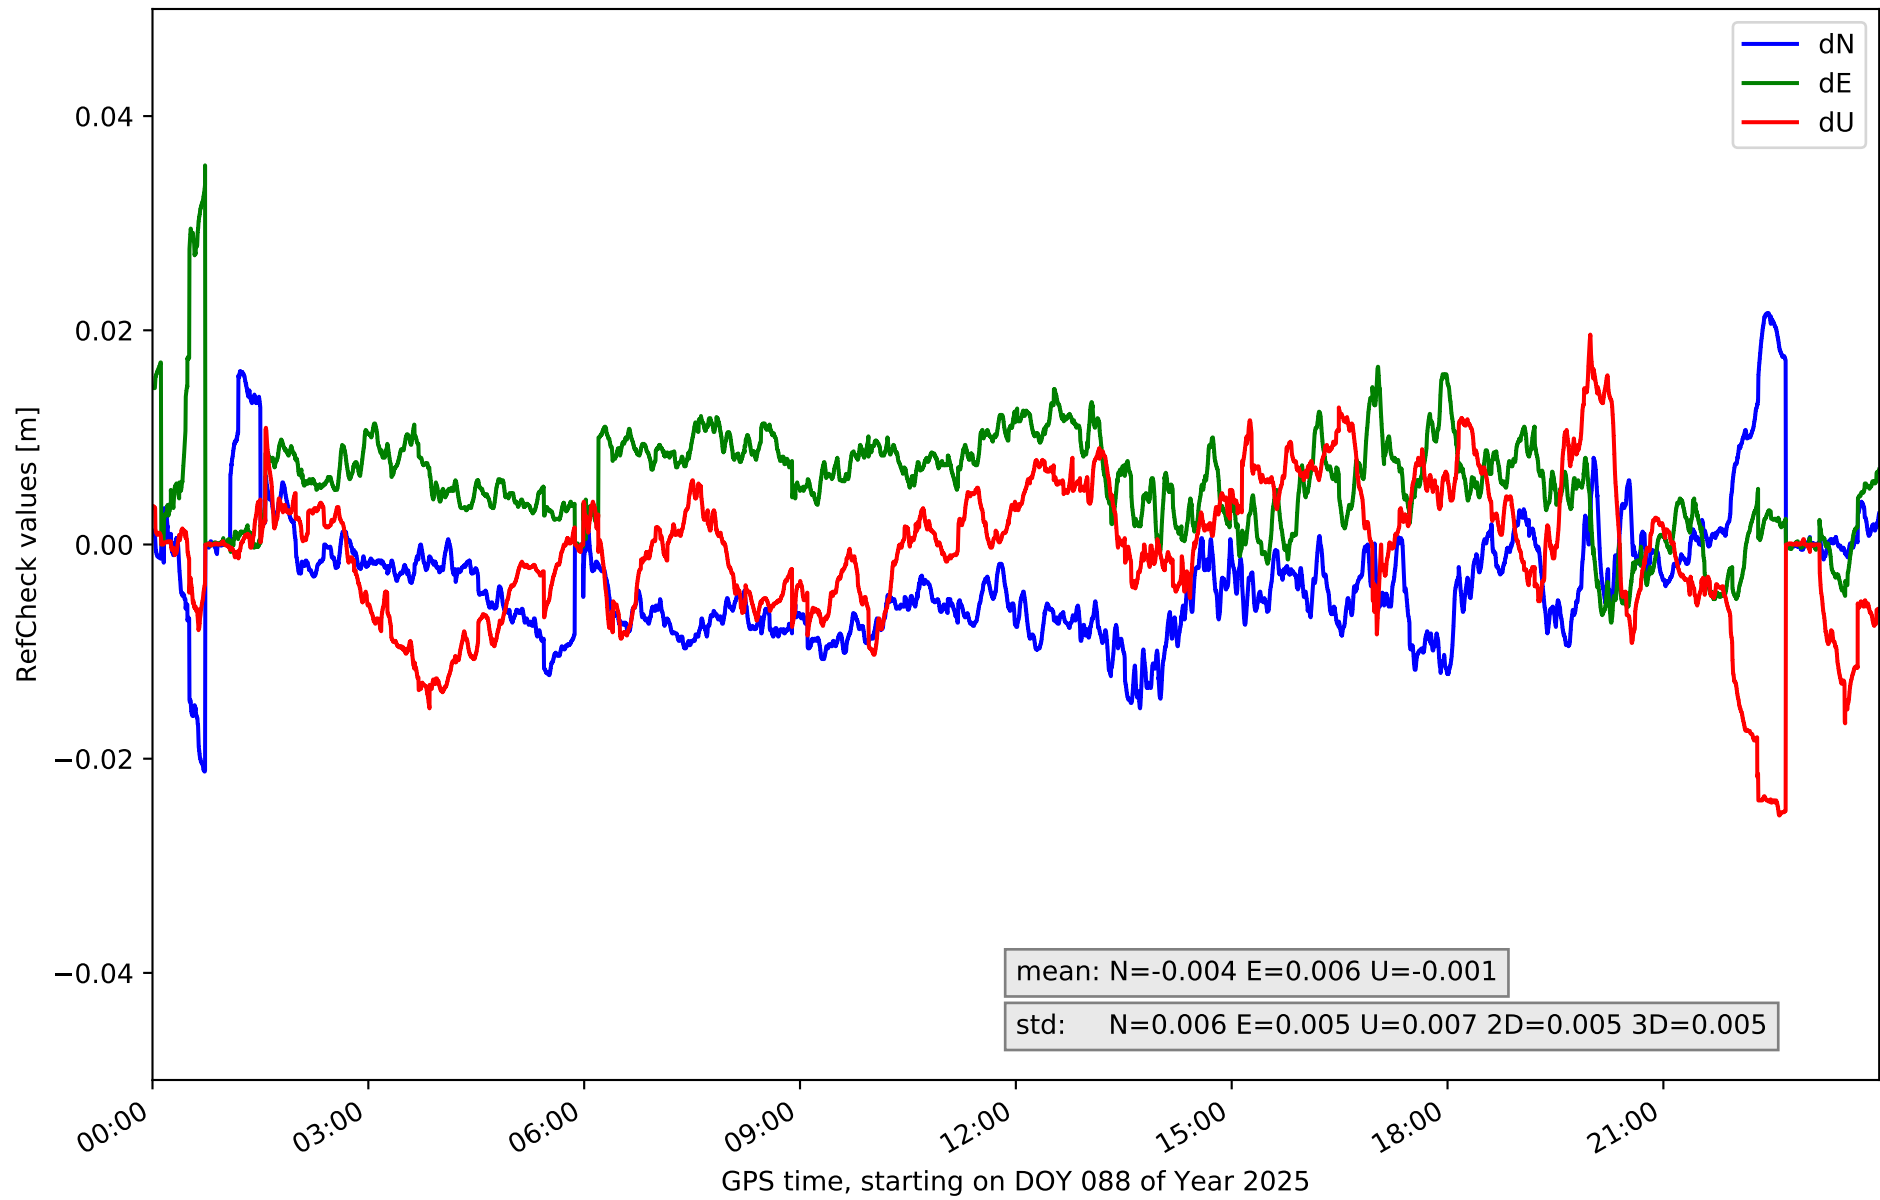


RefCheck for station LRES in network NT32

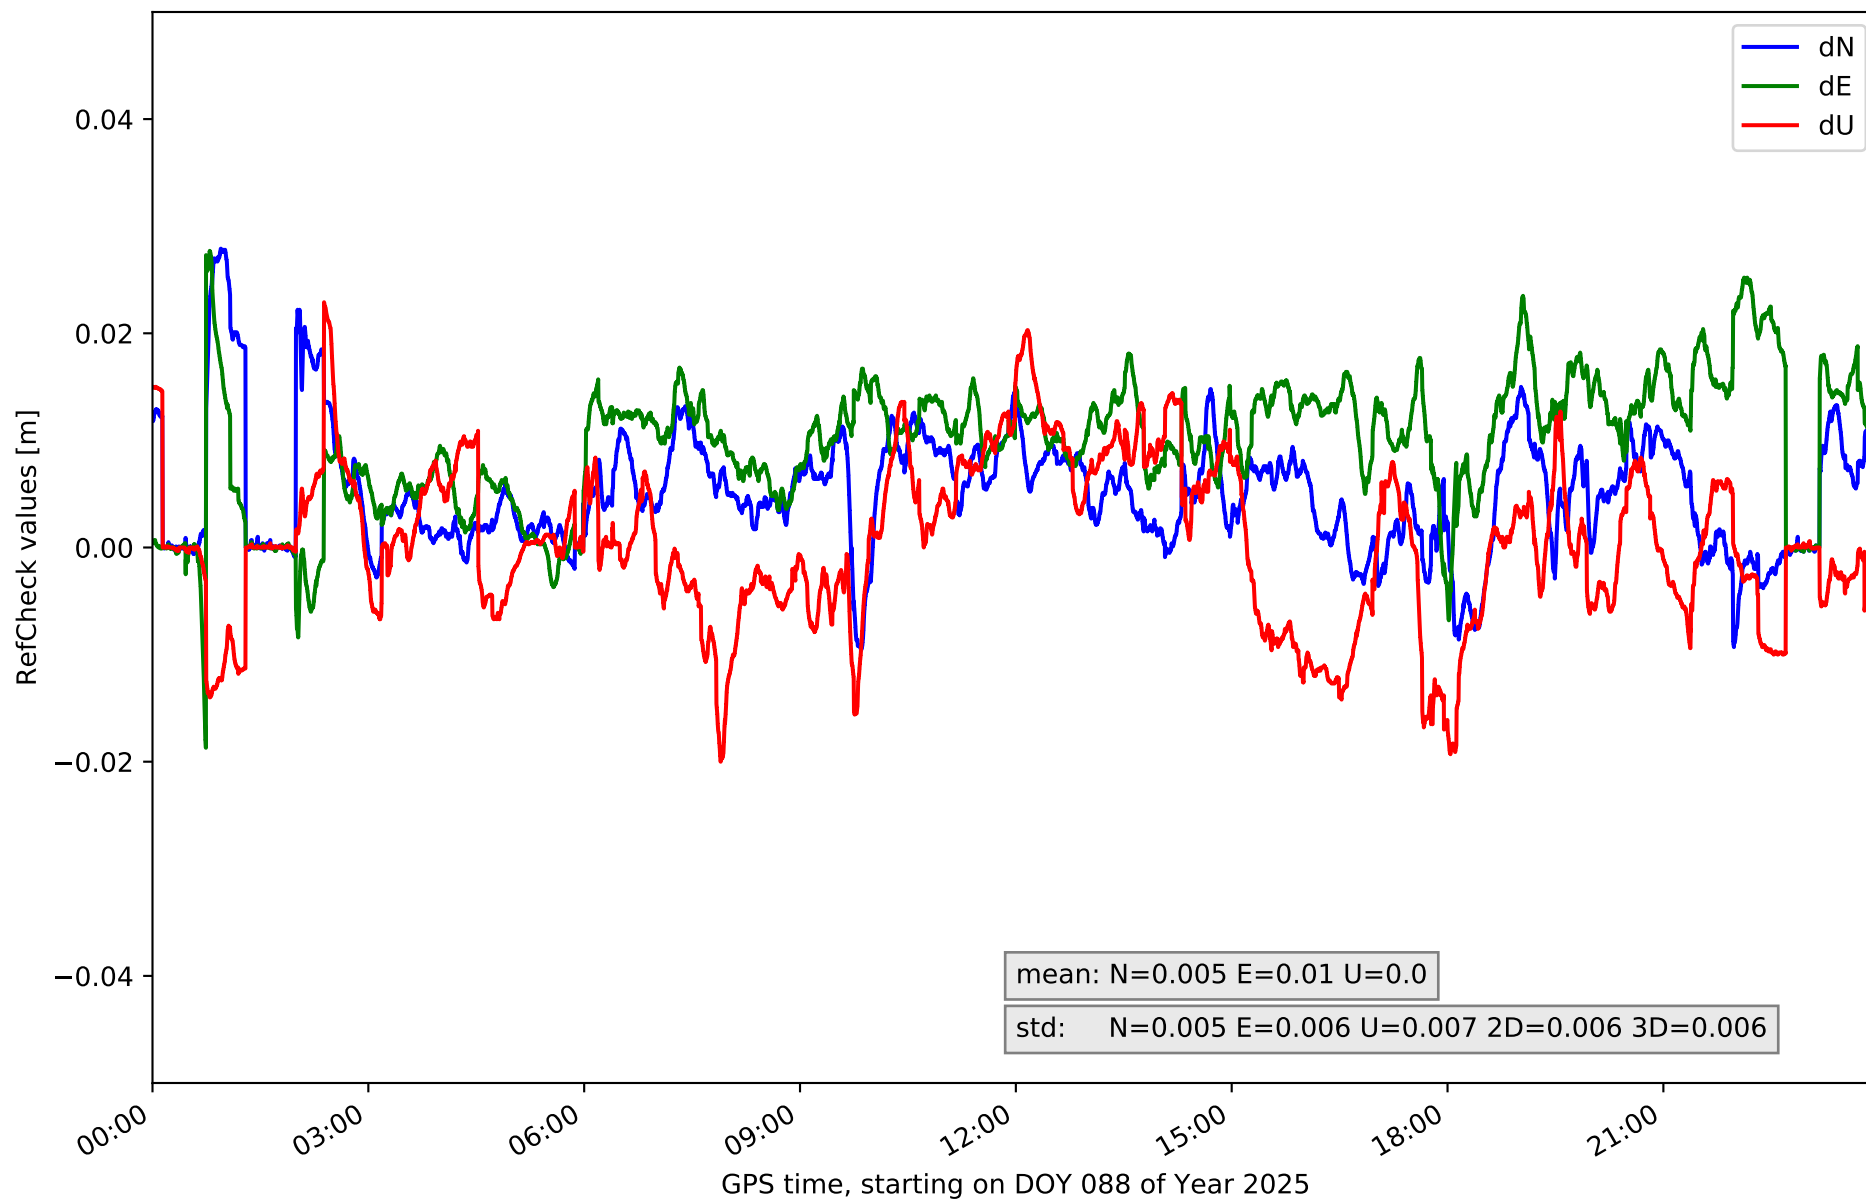


RefCheck for station TN01 in network NT32

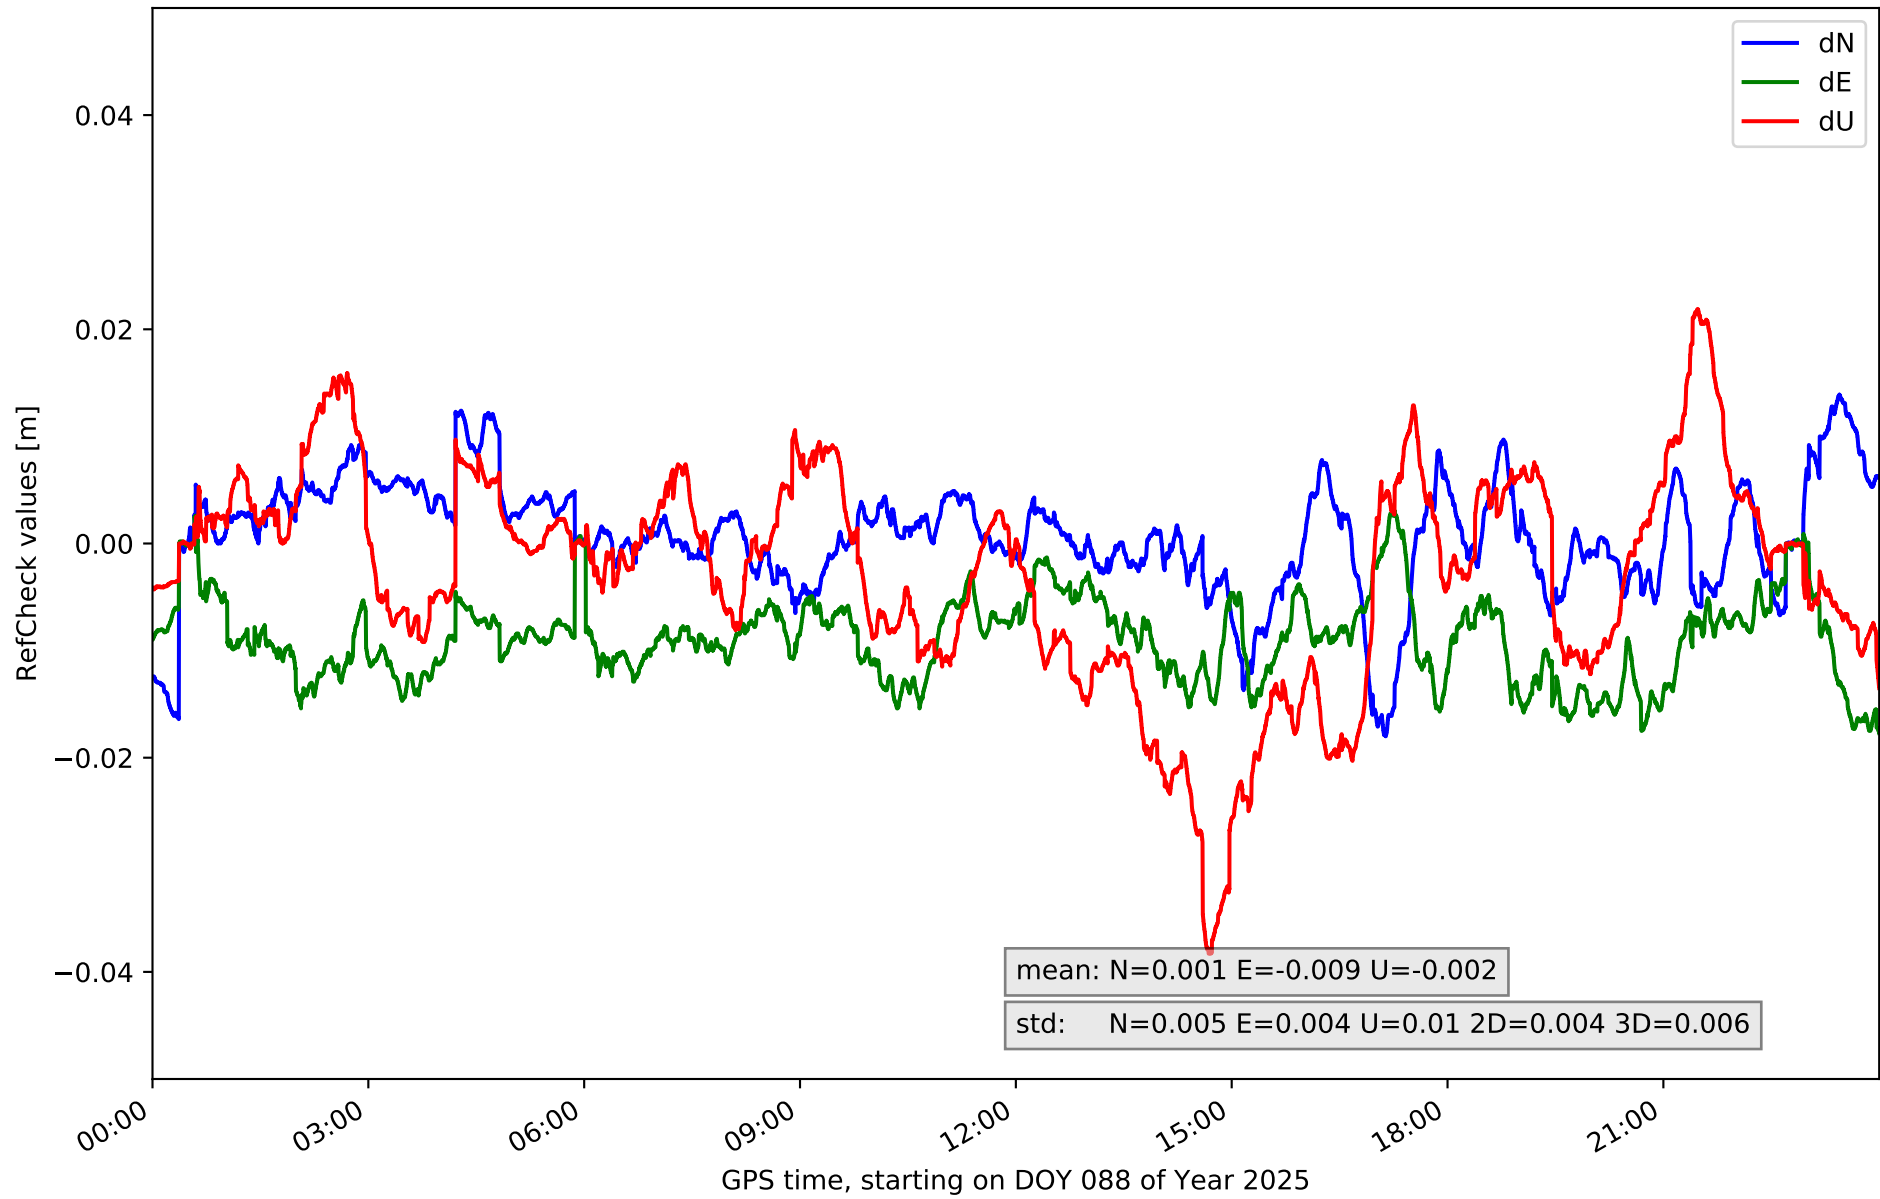


RefCheck for station TN02 in network NT32

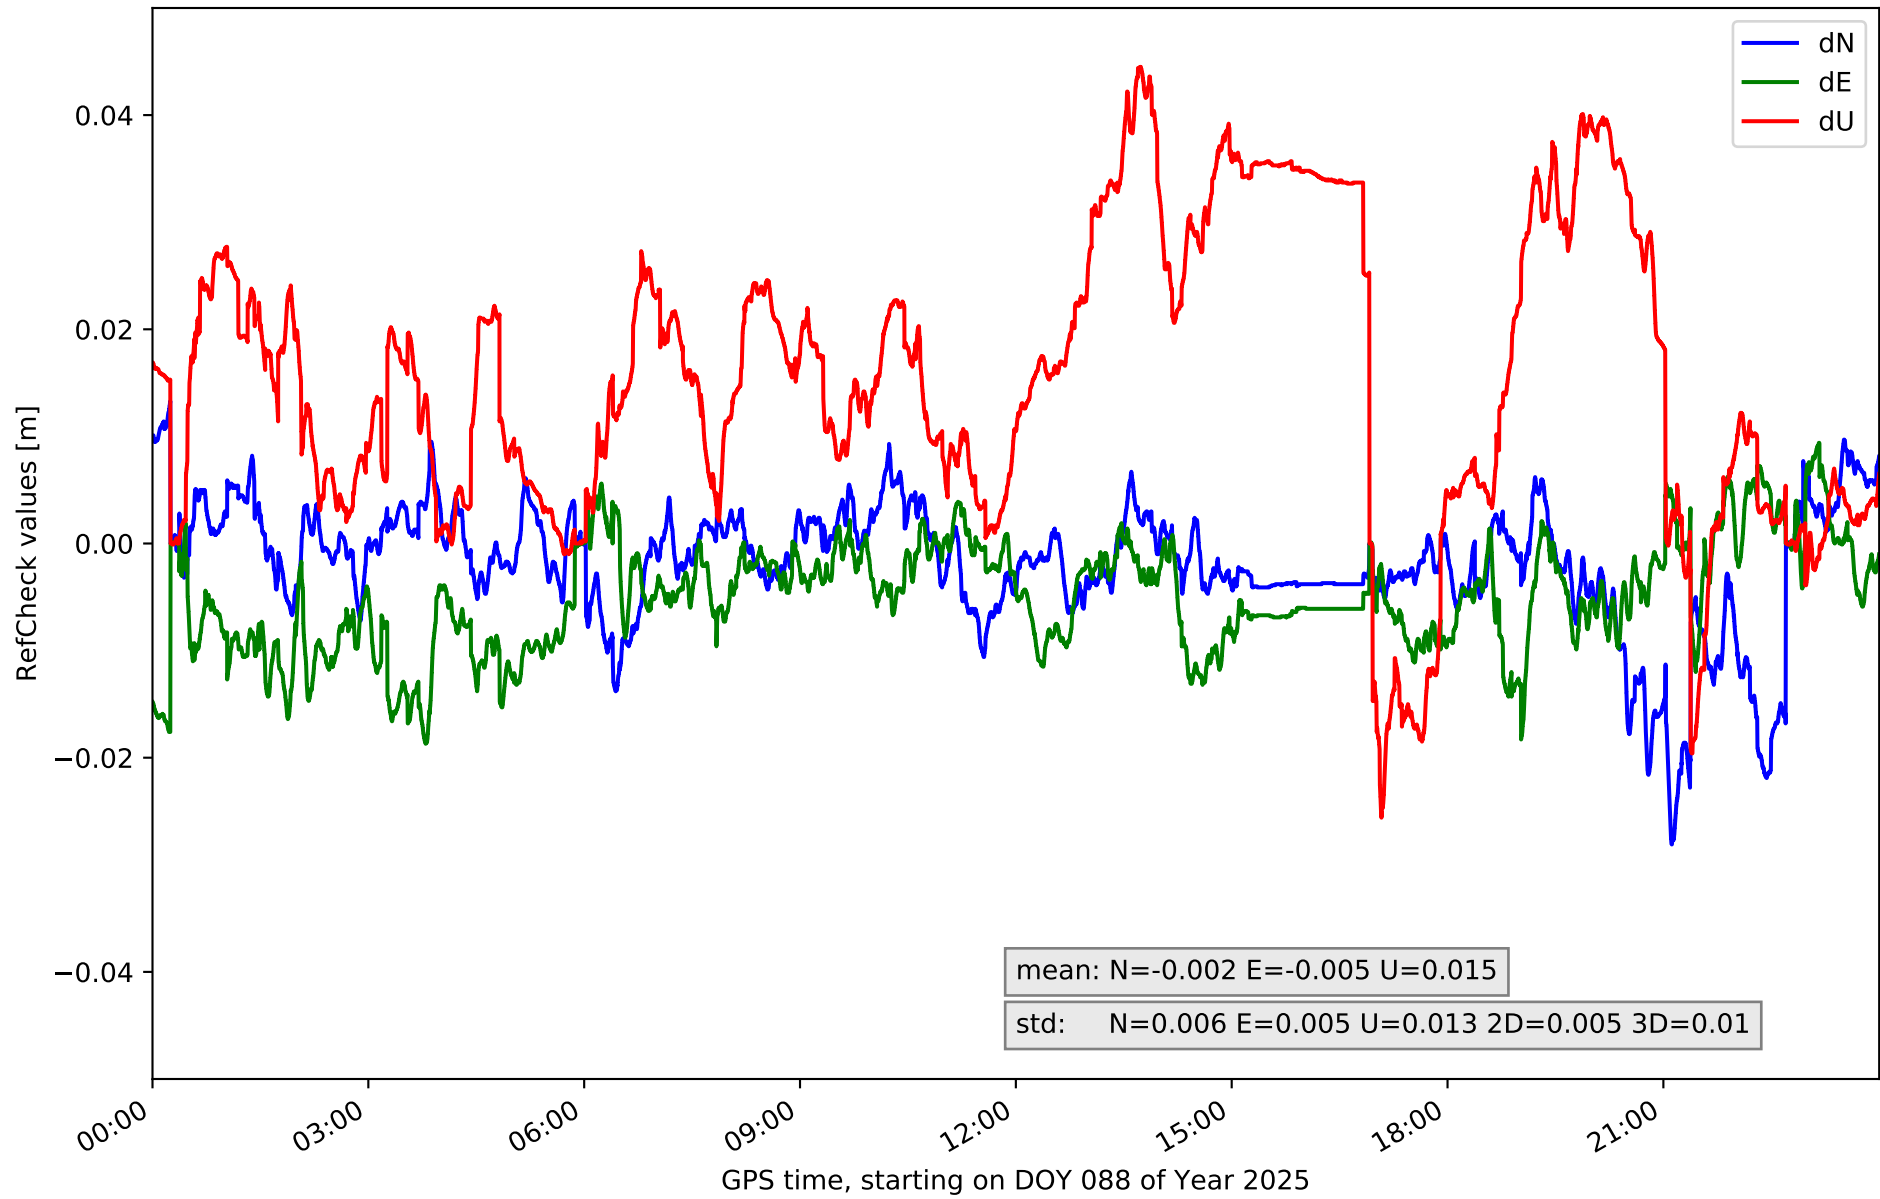


RefCheck for station TN03 in network NT32

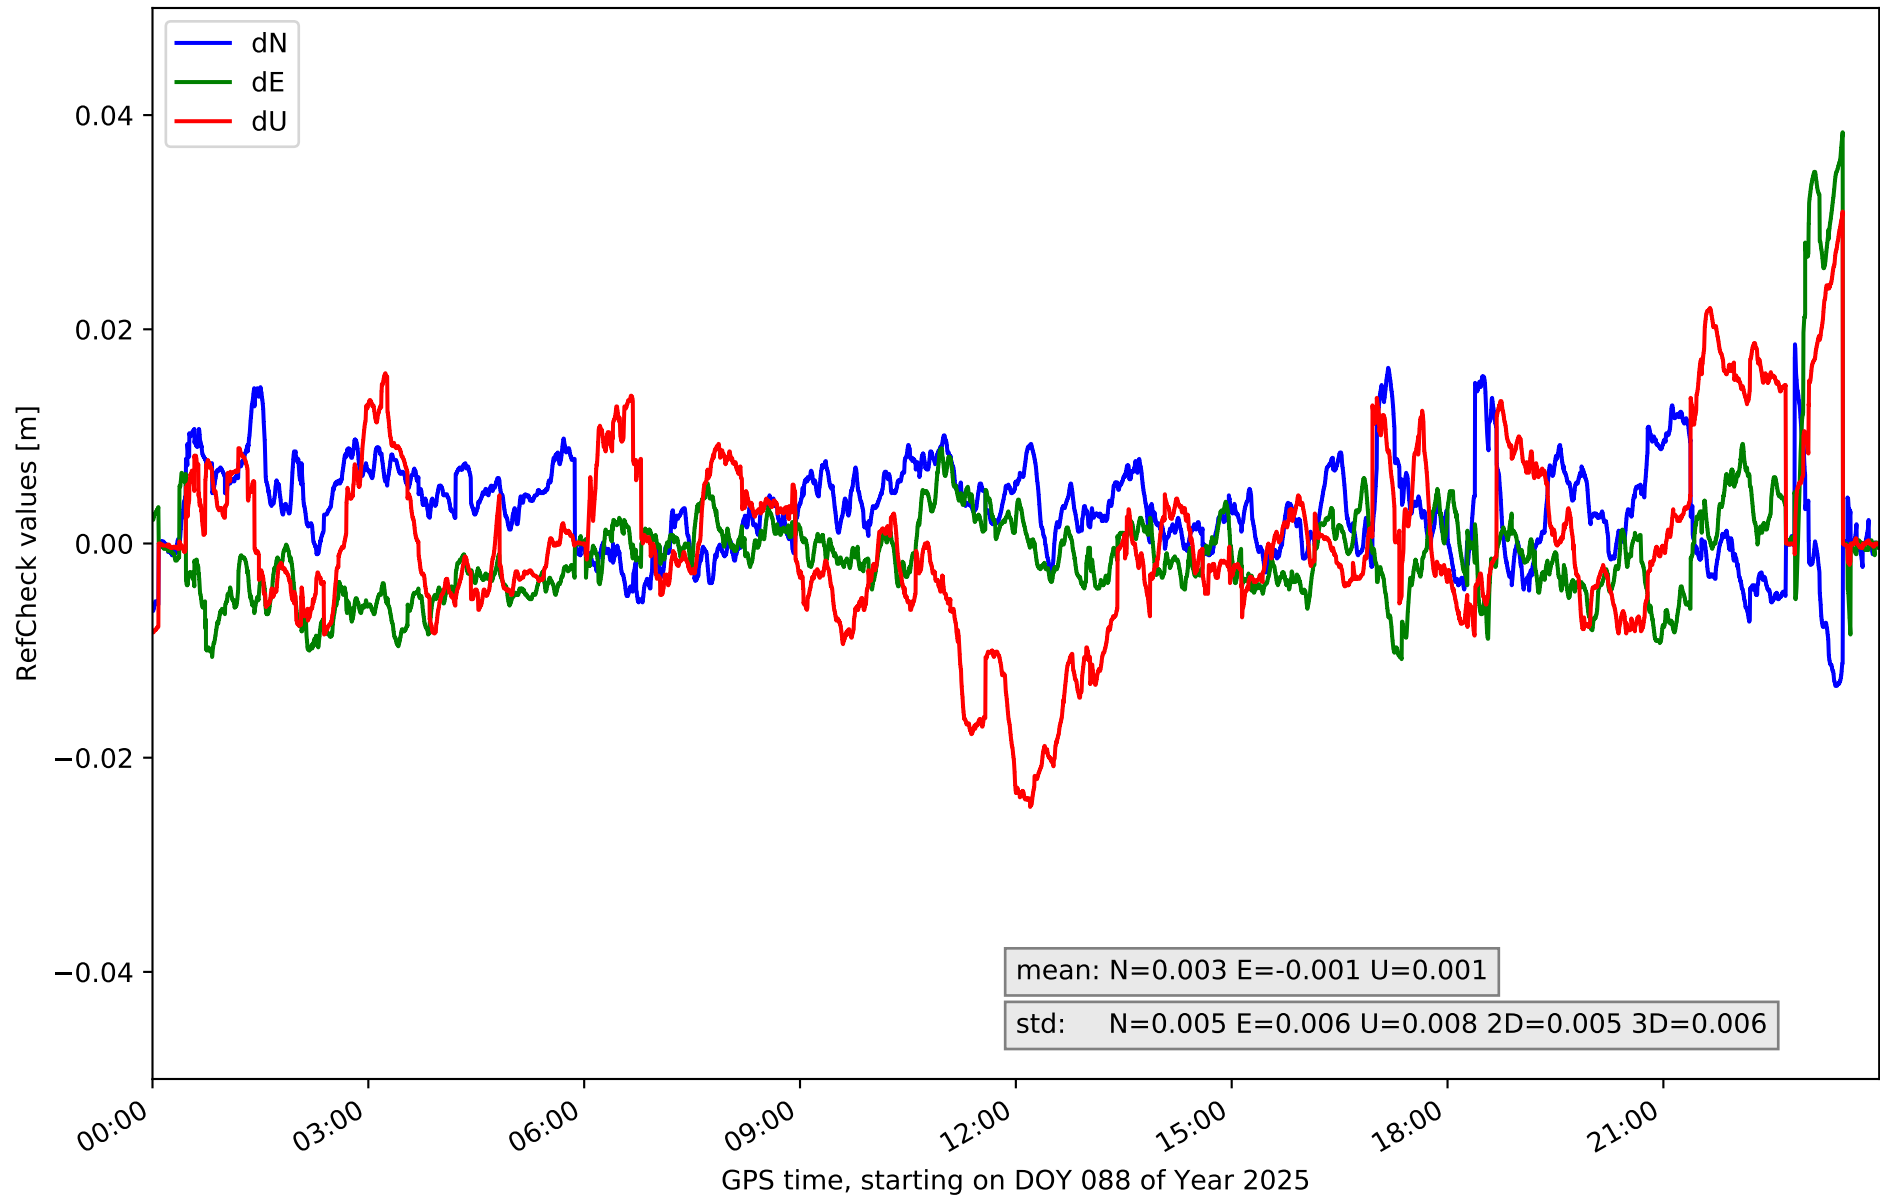


RefCheck for station TN06 in network NT32

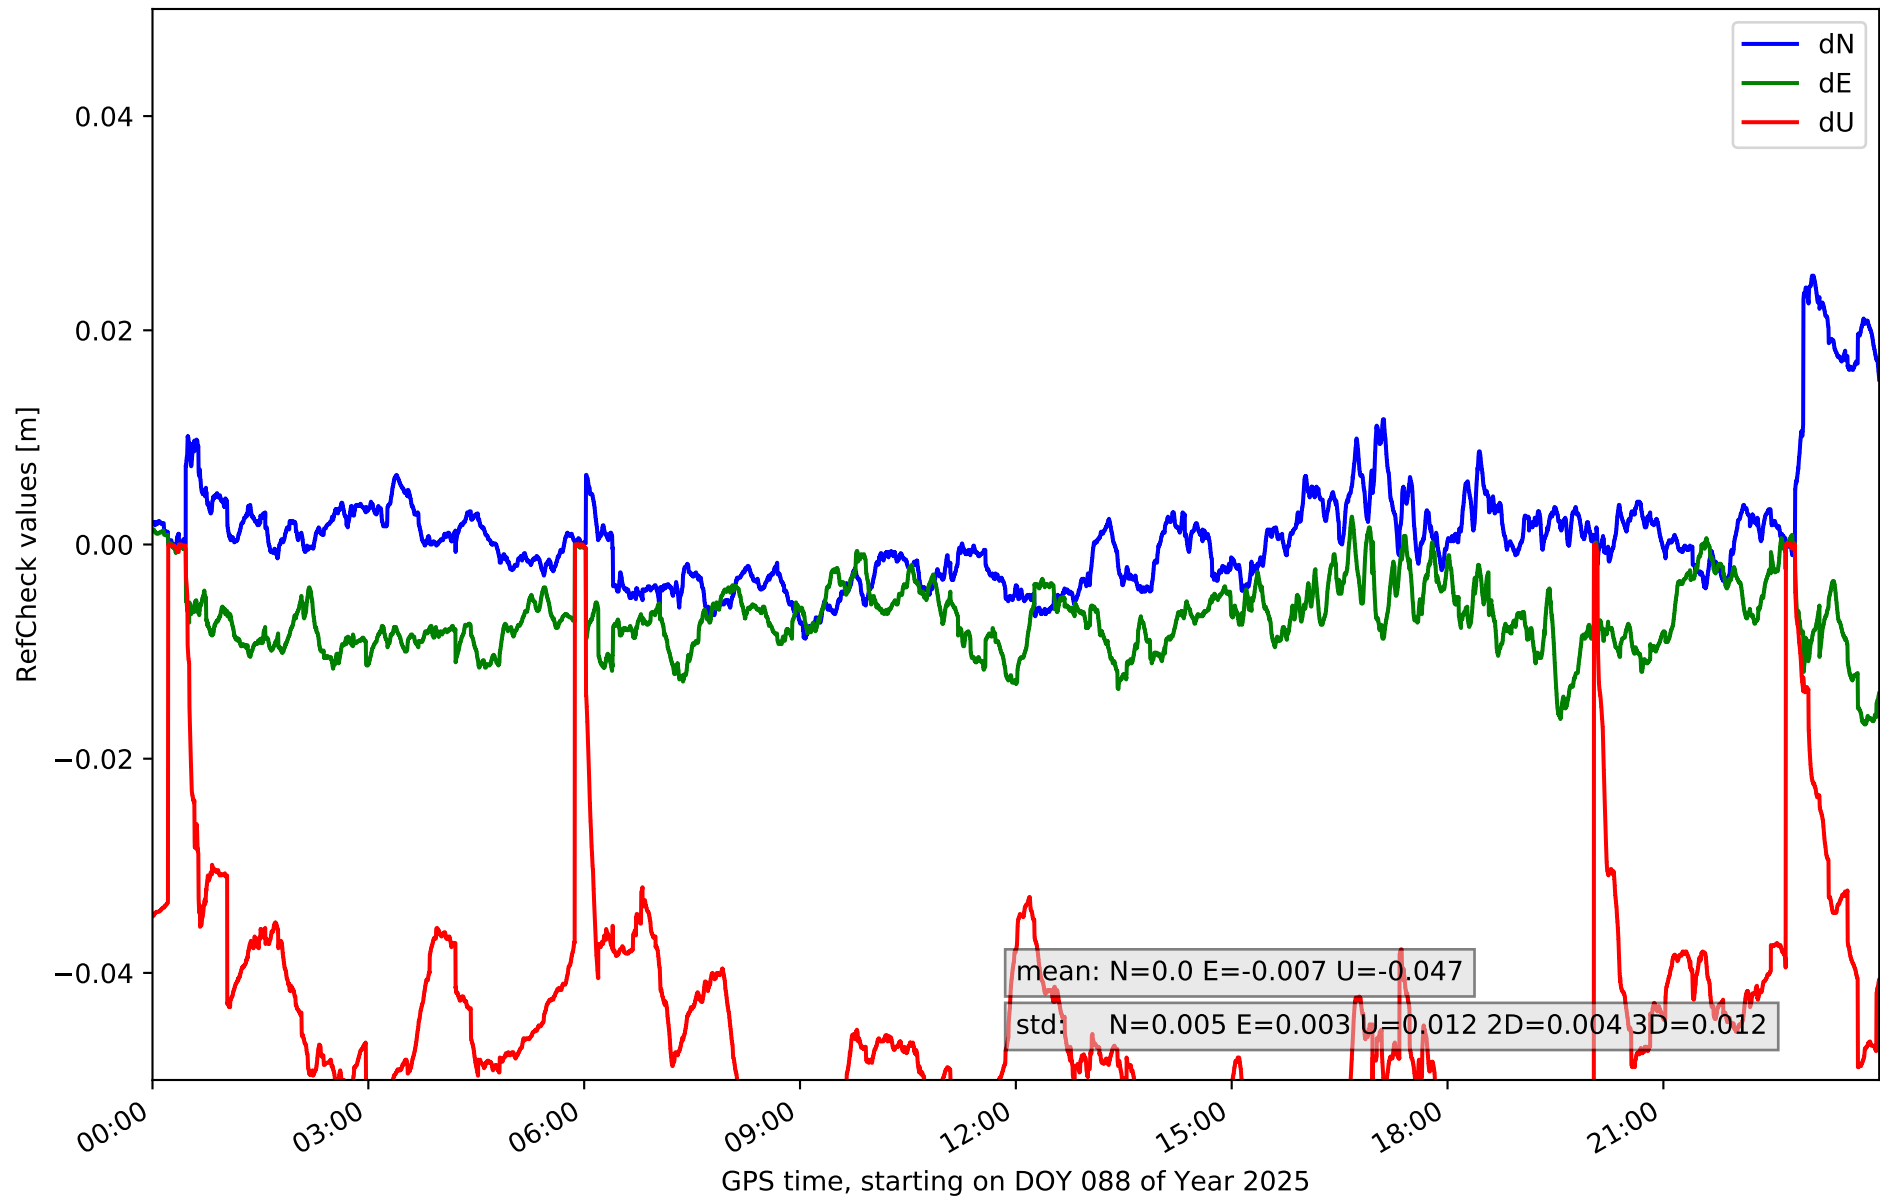

RefCheck for station TN09 in network NT32

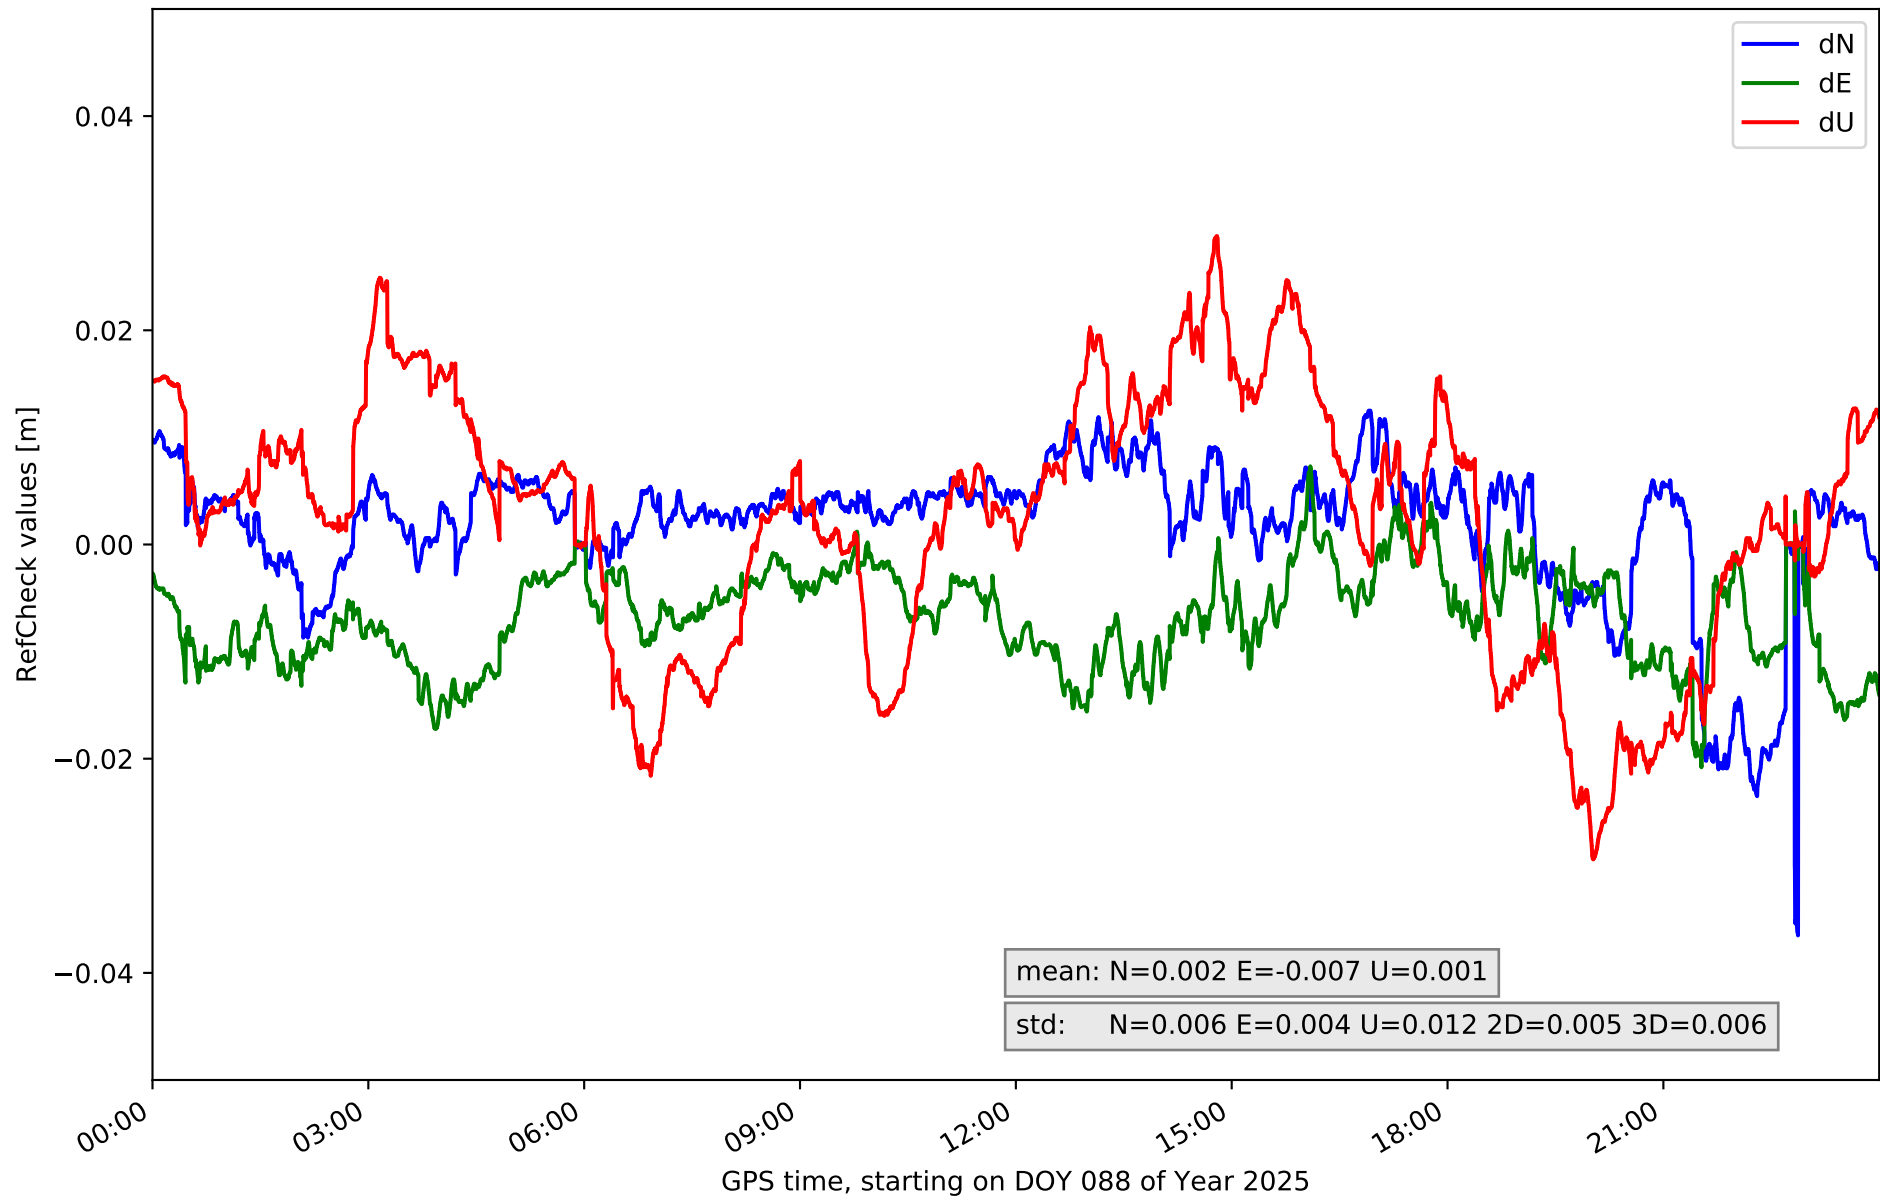

RefCheck for station TE11 in network NT32

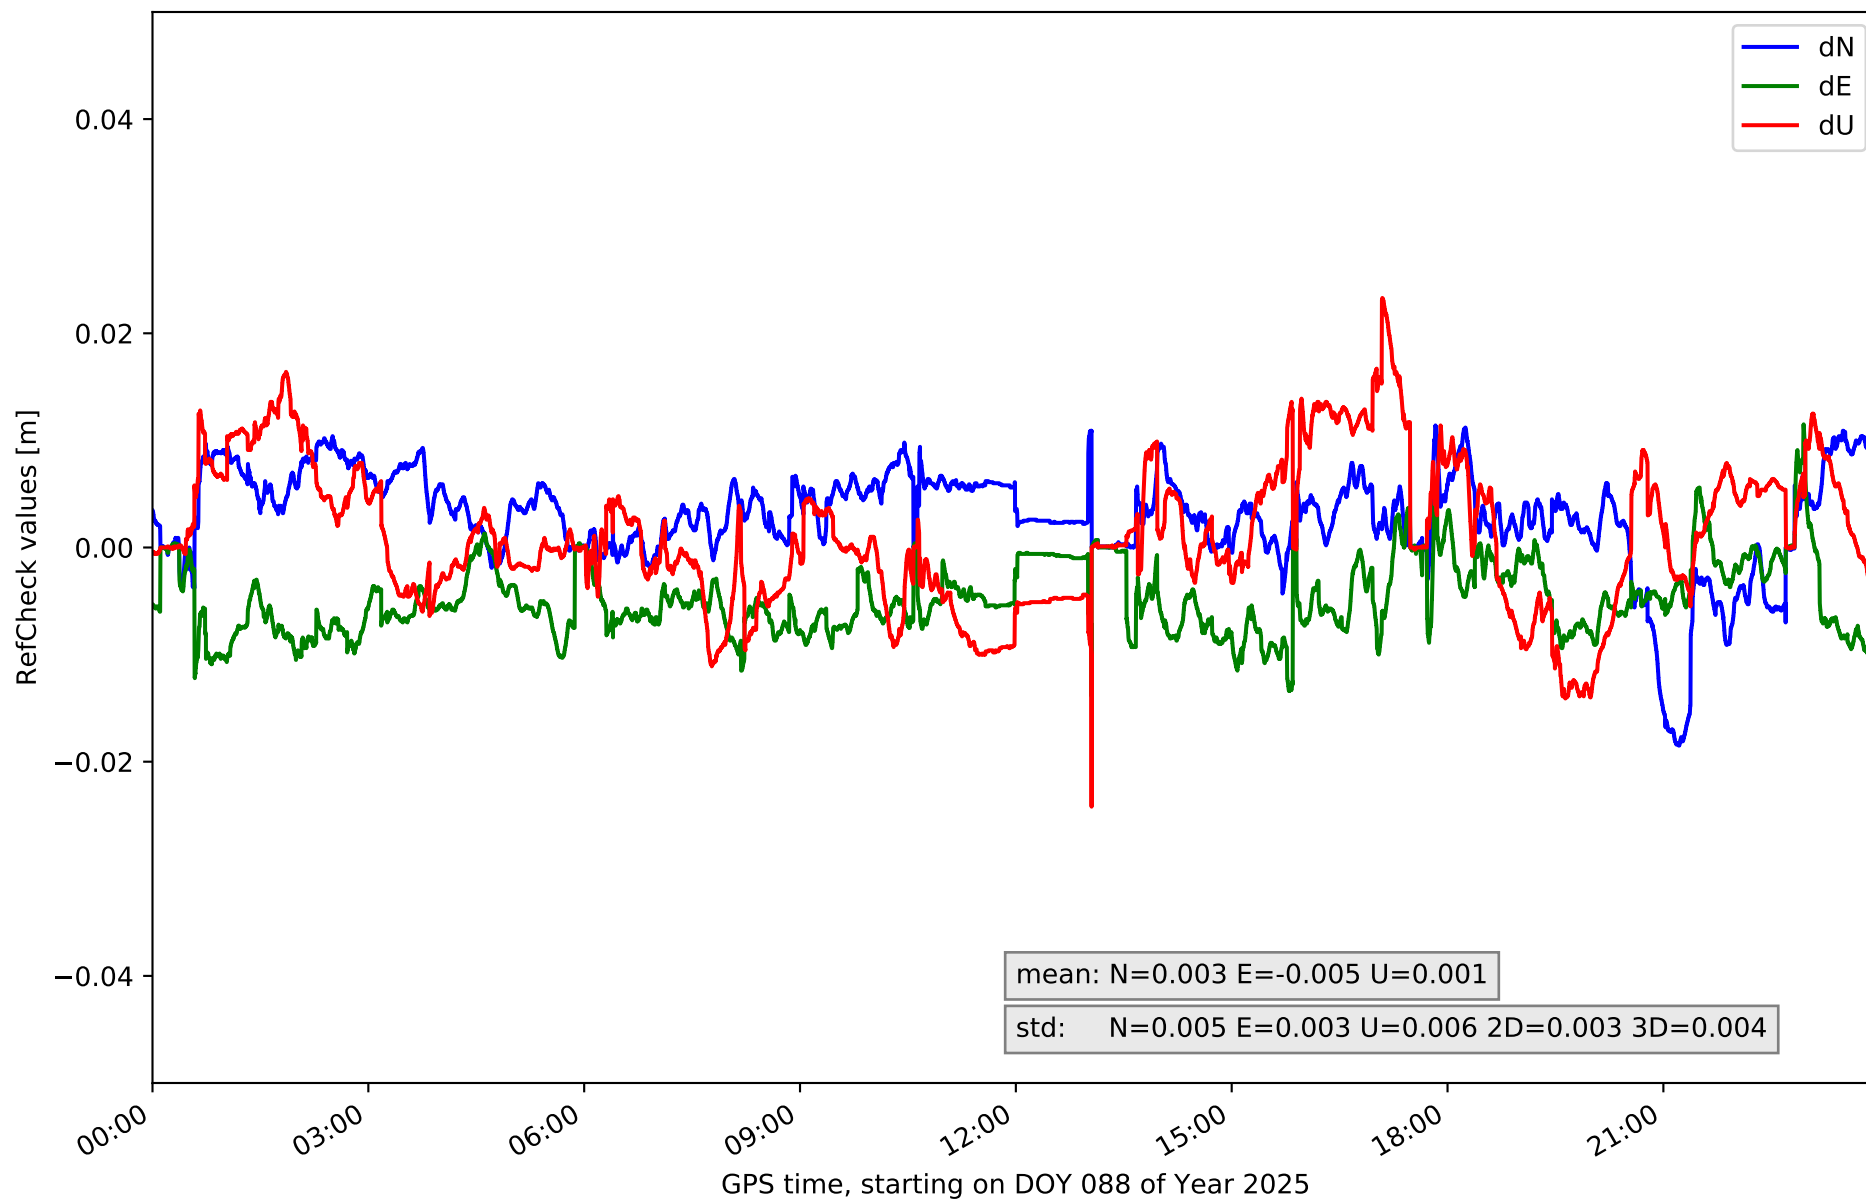

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.039	0.036	0.007	-0.015	0.031	0.008	-0.023	0.028	0.01	0.008	0.009	46292	69.1	24523	36.6
EH02	-0.021	0.032	0.008	-0.007	0.029	0.007	-0.019	0.039	0.011	0.007	0.011	47953	71.6	25862	38.6
GOM1	-0.031	0.01	0.005	-0.027	0.015	0.005	-0.026	0.029	0.011	0.005	0.006	25797	38.5	11016	16.5
IZAN	-0.017	0.013	0.004	-0.012	0.017	0.006	-0.017	0.077	0.02	0.004	0.017	12571	18.8	10673	15.9
LP01	-0.021	0.015	0.005	-0.037	0.028	0.007	-0.037	0.051	0.013	0.006	0.01	25272	37.7	22238	33.2
LP03	-0.009	0.016	0.004	-0.016	0.034	0.007	-0.031	0.035	0.012	0.006	0.008	15063	22.5	15926	23.8
LPAL	-0.021	0.022	0.006	-0.007	0.035	0.005	-0.025	0.02	0.007	0.005	0.005	28199	42.1	2325	3.5
LRES	-0.01	0.028	0.005	-0.019	0.028	0.006	-0.02	0.023	0.007	0.006	0.006	44150	65.9	7994	11.9
TN01	-0.018	0.014	0.005	-0.018	0.003	0.004	-0.038	0.022	0.01	0.004	0.006	34559	51.6	7860	11.7
TN02	-0.028	0.013	0.006	-0.019	0.009	0.005	-0.026	0.044	0.013	0.005	0.01	20235	30.2	30222	45.1
TN03	-0.013	0.019	0.005	-0.011	0.038	0.006	-0.025	0.031	0.008	0.005	0.006	9117	13.6	2846	4.3
TN06	-0.009	0.025	0.005	-0.017	0.003	0.003	-0.08	0.0	0.012	0.004	0.012	14666	21.9	65183	97.4
TN09	-0.036	0.013	0.006	-0.021	0.007	0.004	-0.029	0.029	0.012	0.005	0.006	25374	37.9	17796	26.6
TE11	-0.018	0.011	0.005	-0.014	0.011	0.003	-0.024	0.023	0.006	0.003	0.004	11834	17.7	311	0.5
Mean	-0.021	0.019	0.005	-0.017	0.021	0.005	-0.03	0.032	0.011	0.005	0.008	25791.6	38.5	17483.9	26.1
Min/Max	-0.039	0.036	0.008	-0.037	0.038	0.008	-0.08	0.077	0.02	0.008	0.017	47953	71.6	65183	97.4

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	76.5	75.3	65.9	84.1	81.2
considering satellites with dual-frequency fixed	71.5	68.8	61.2	77.3	79.1
considering all signals separately	72.0	69.0	61.2	77.4	78.2