

summary for network NT32

timeperiod chosen: from 2025-04-03-00:00:00 until 2025-04-03-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.2 seconds


average fixing percentage with threshold set to 0.3: 81.7 percent

stations available: 14 of 16


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

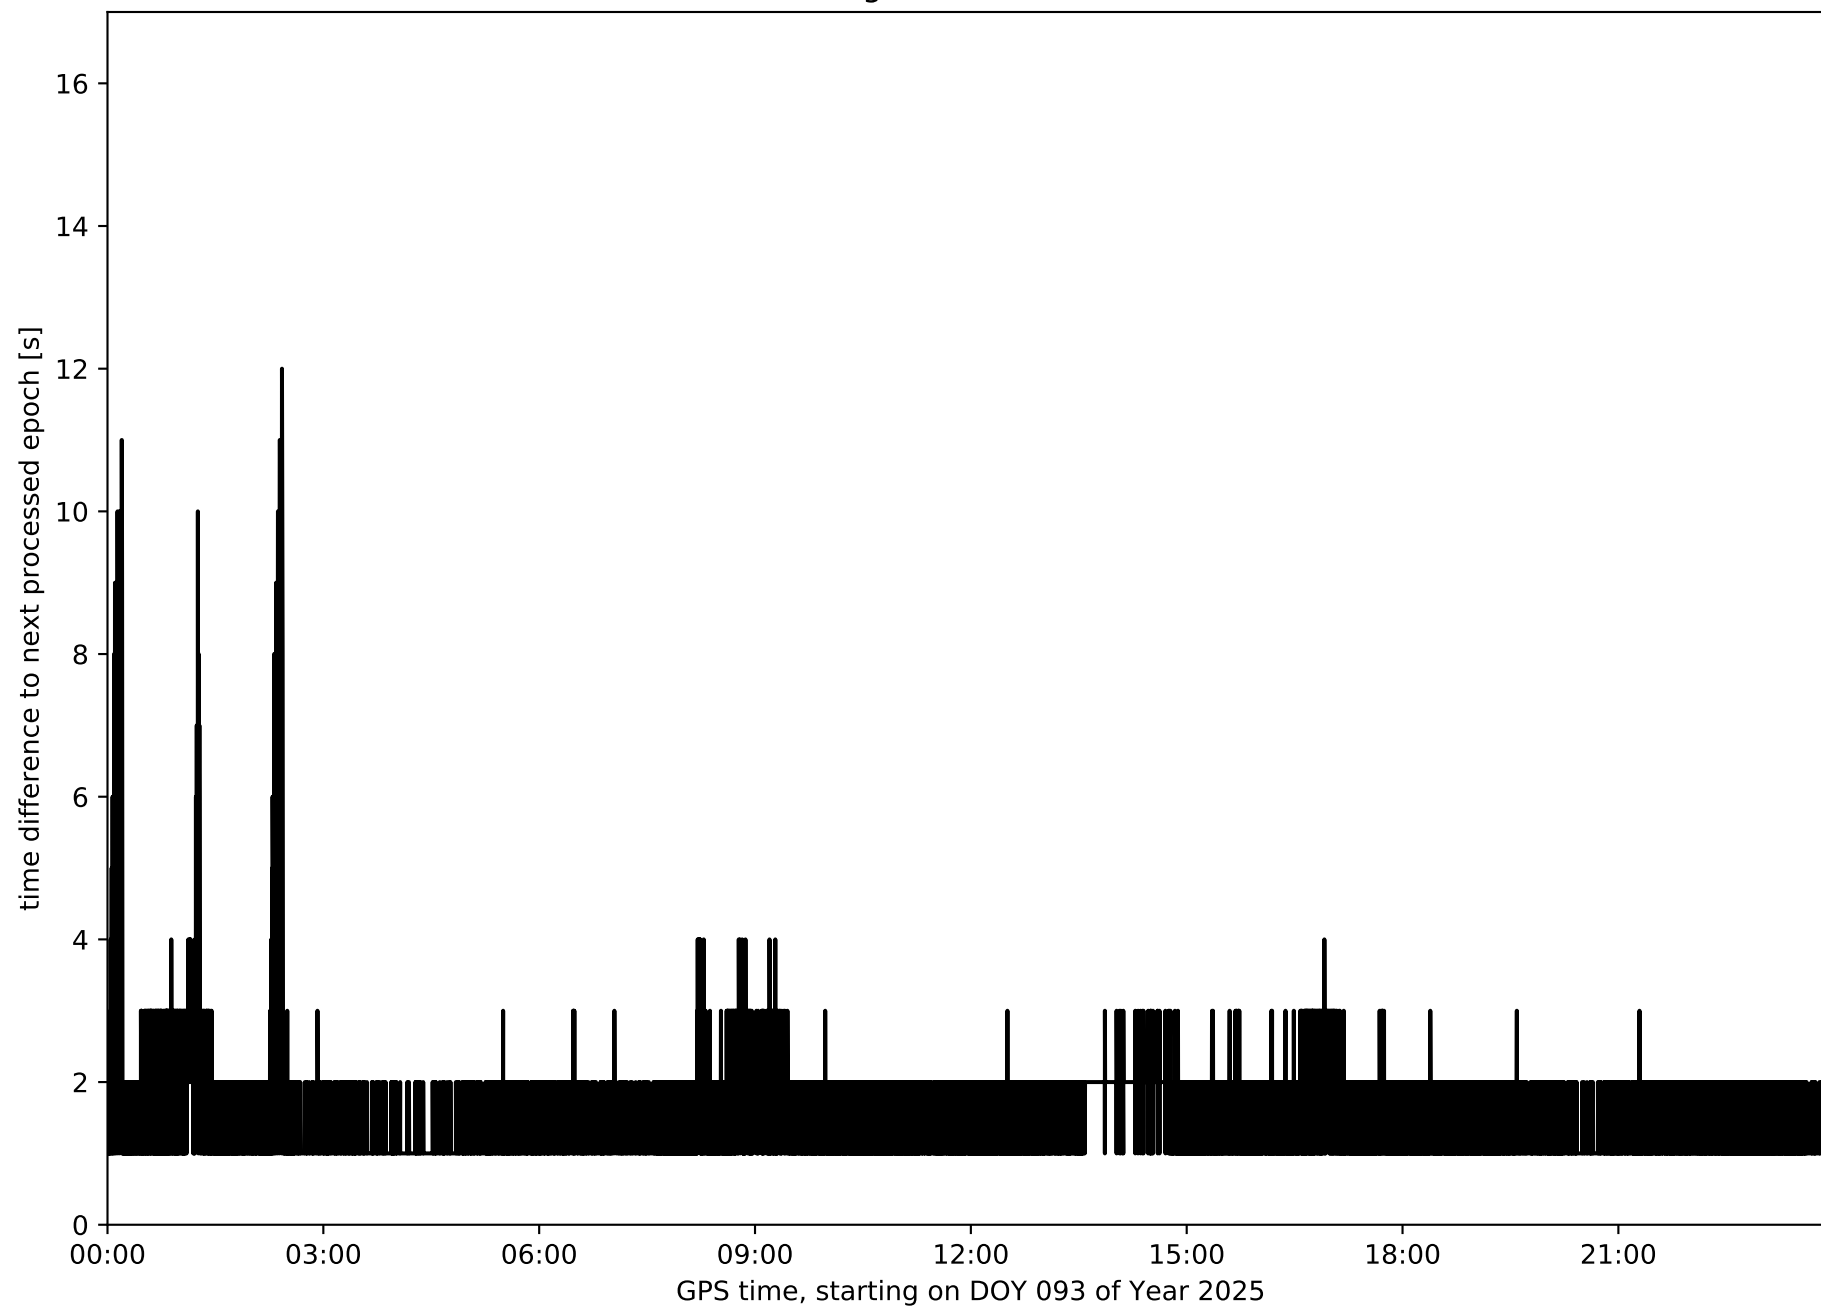


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

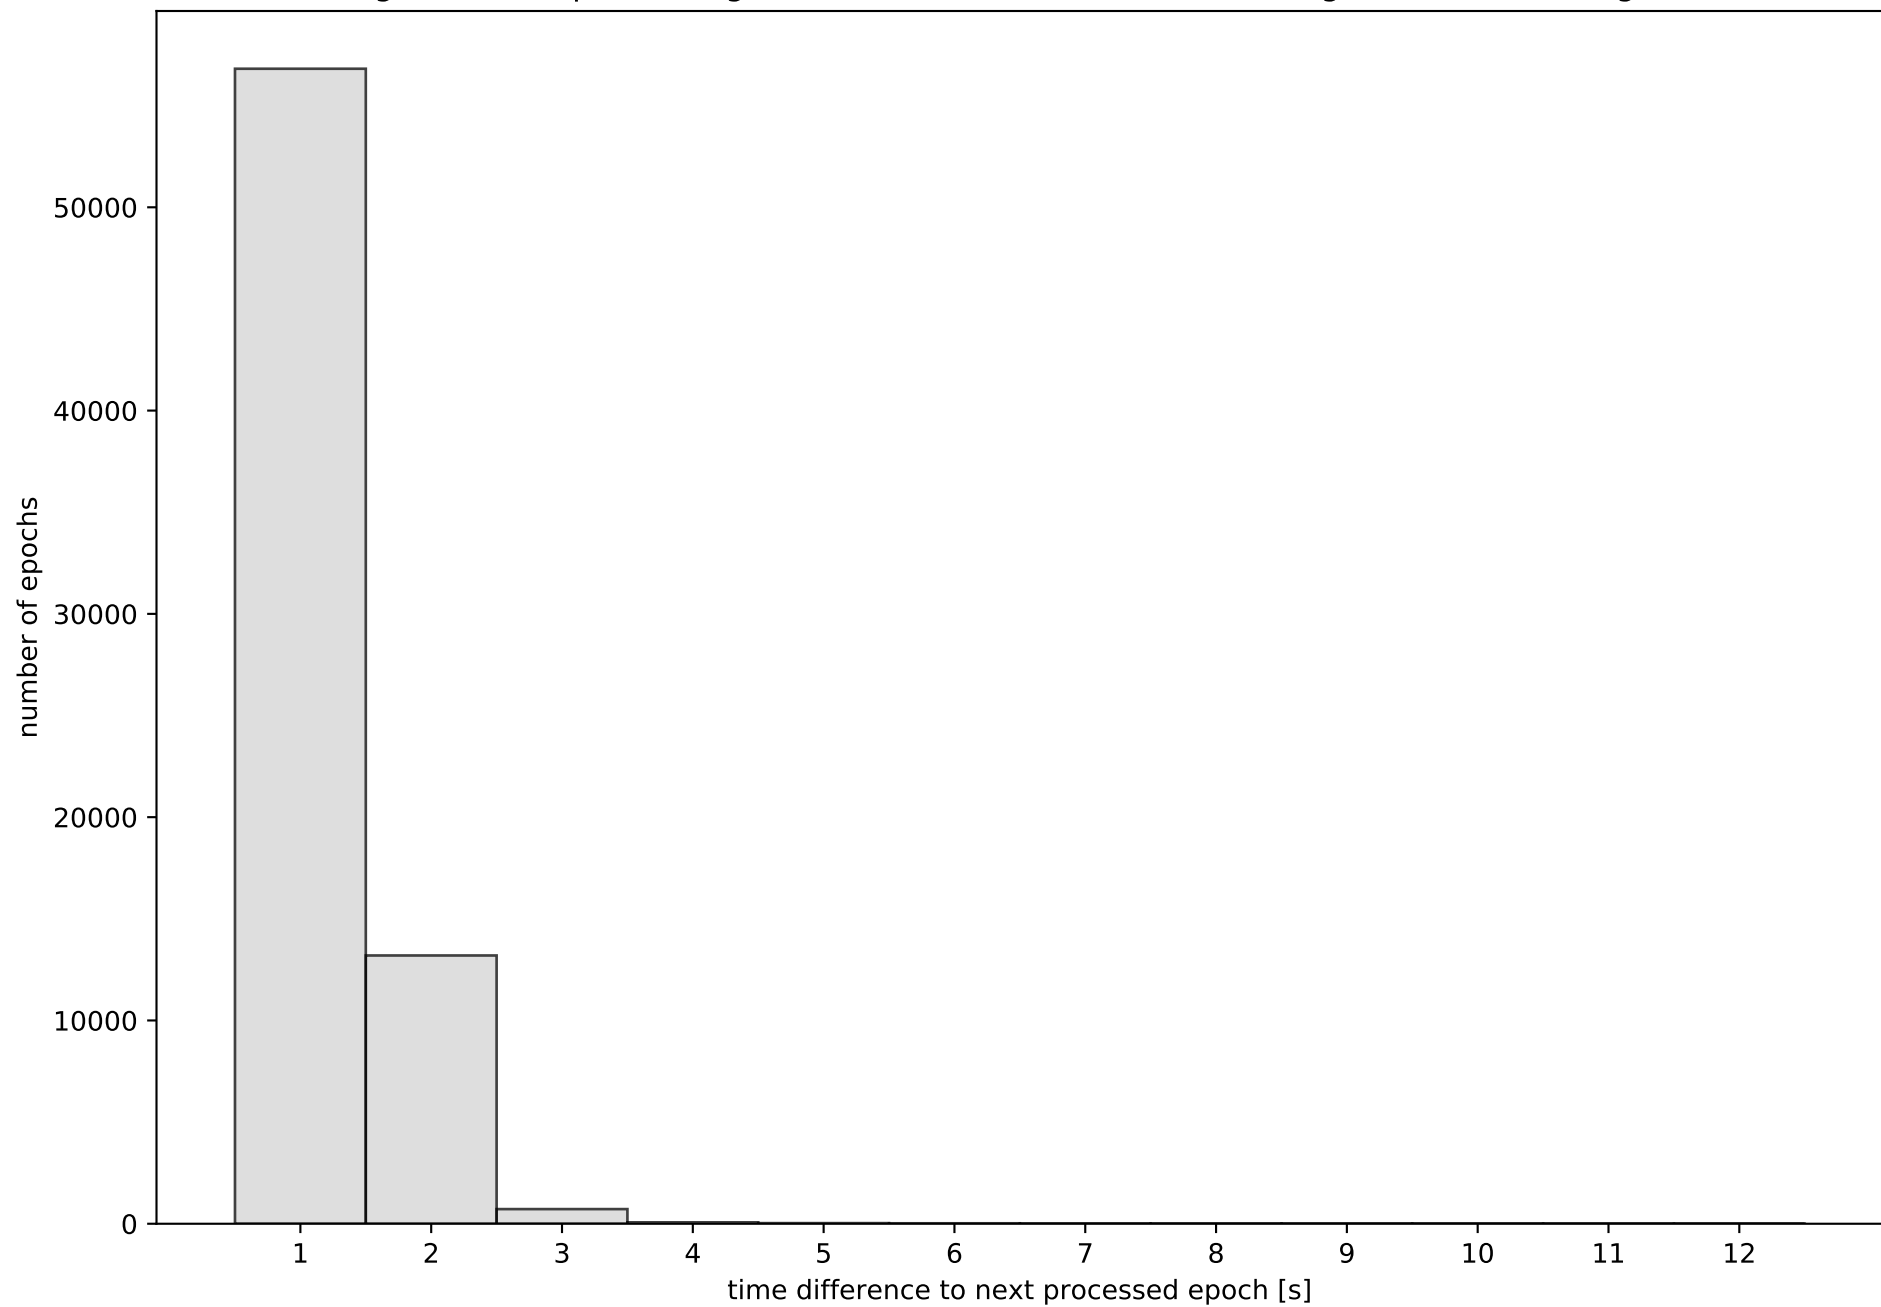


Network NT32 with threshold set to 0.3

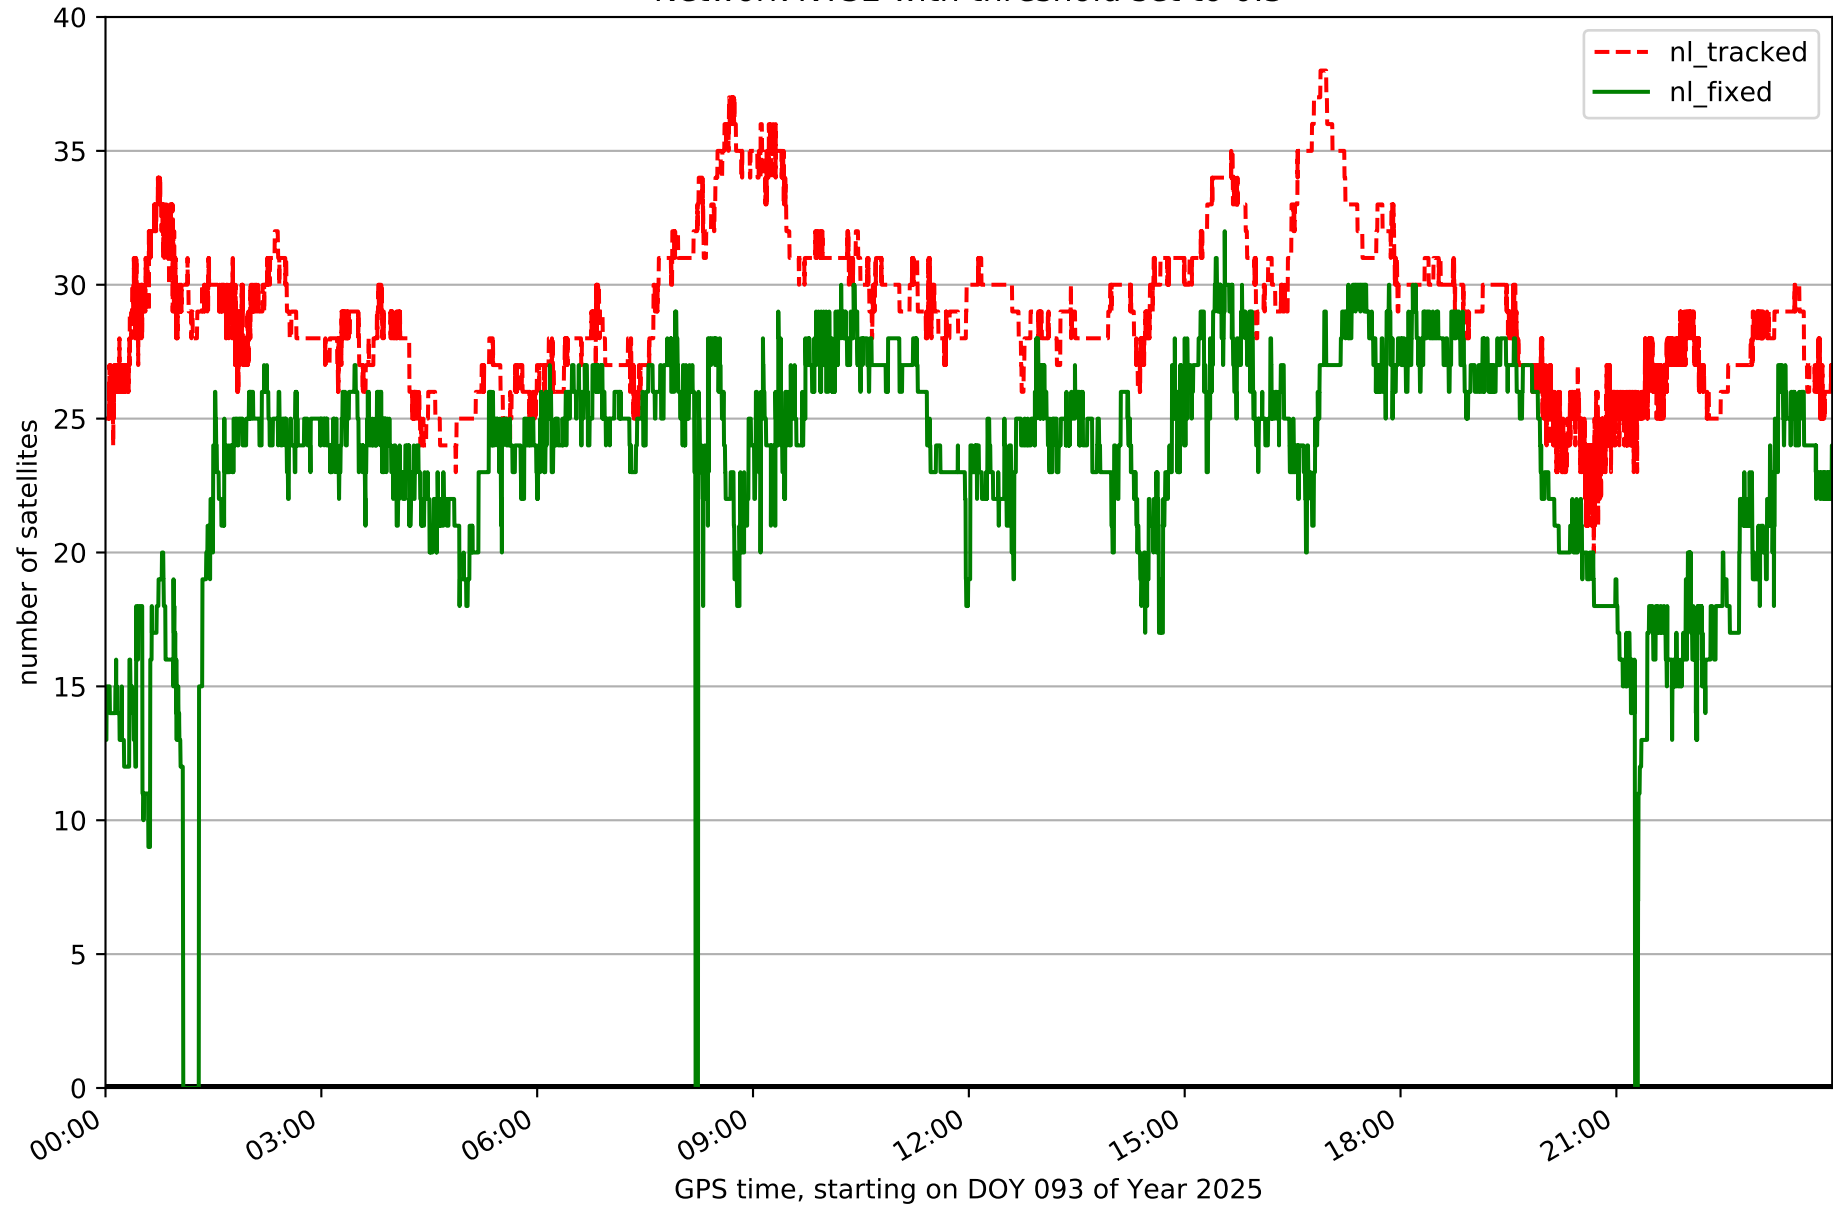


Fixing percentage of satellites in network NT32 with threshold set to 0.3

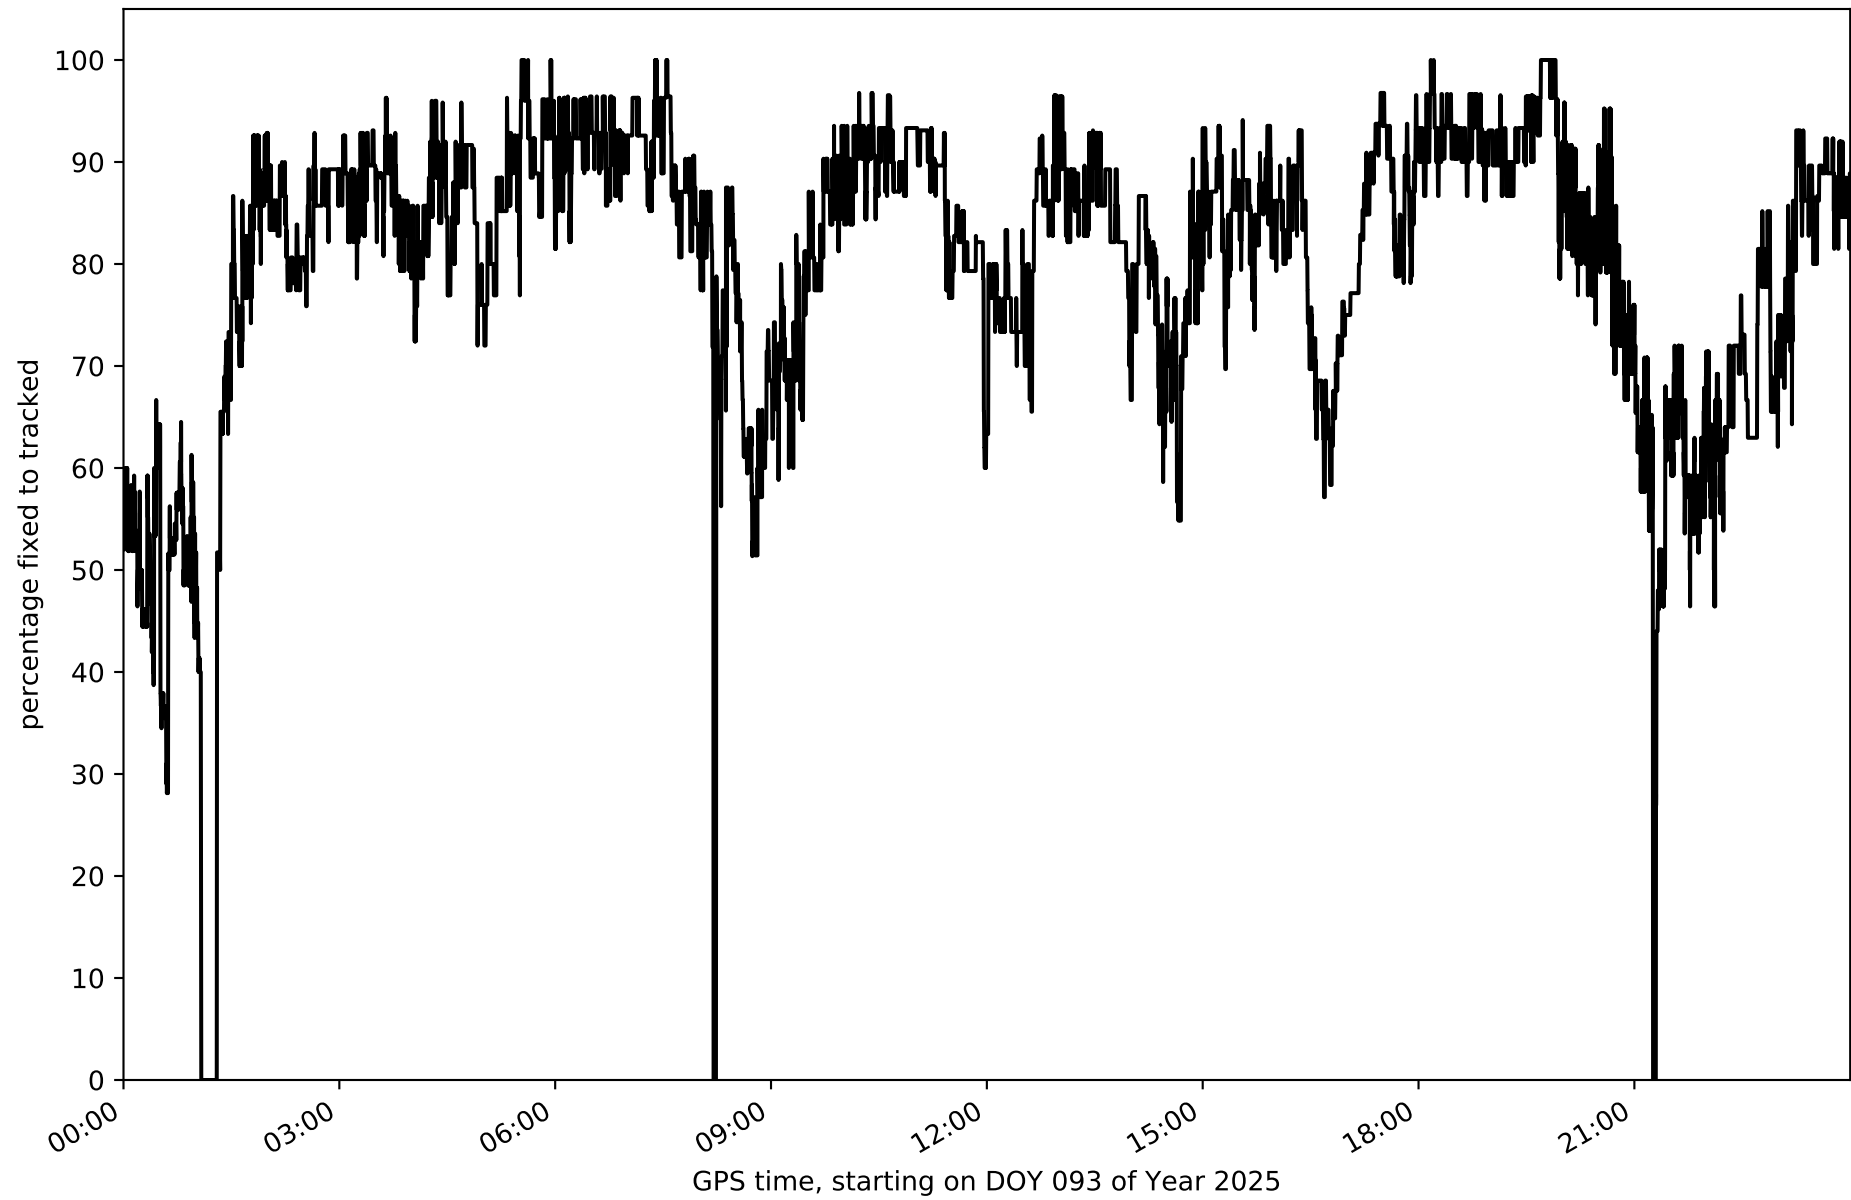


Network NT32 - only GPS with threshold set to 0.3

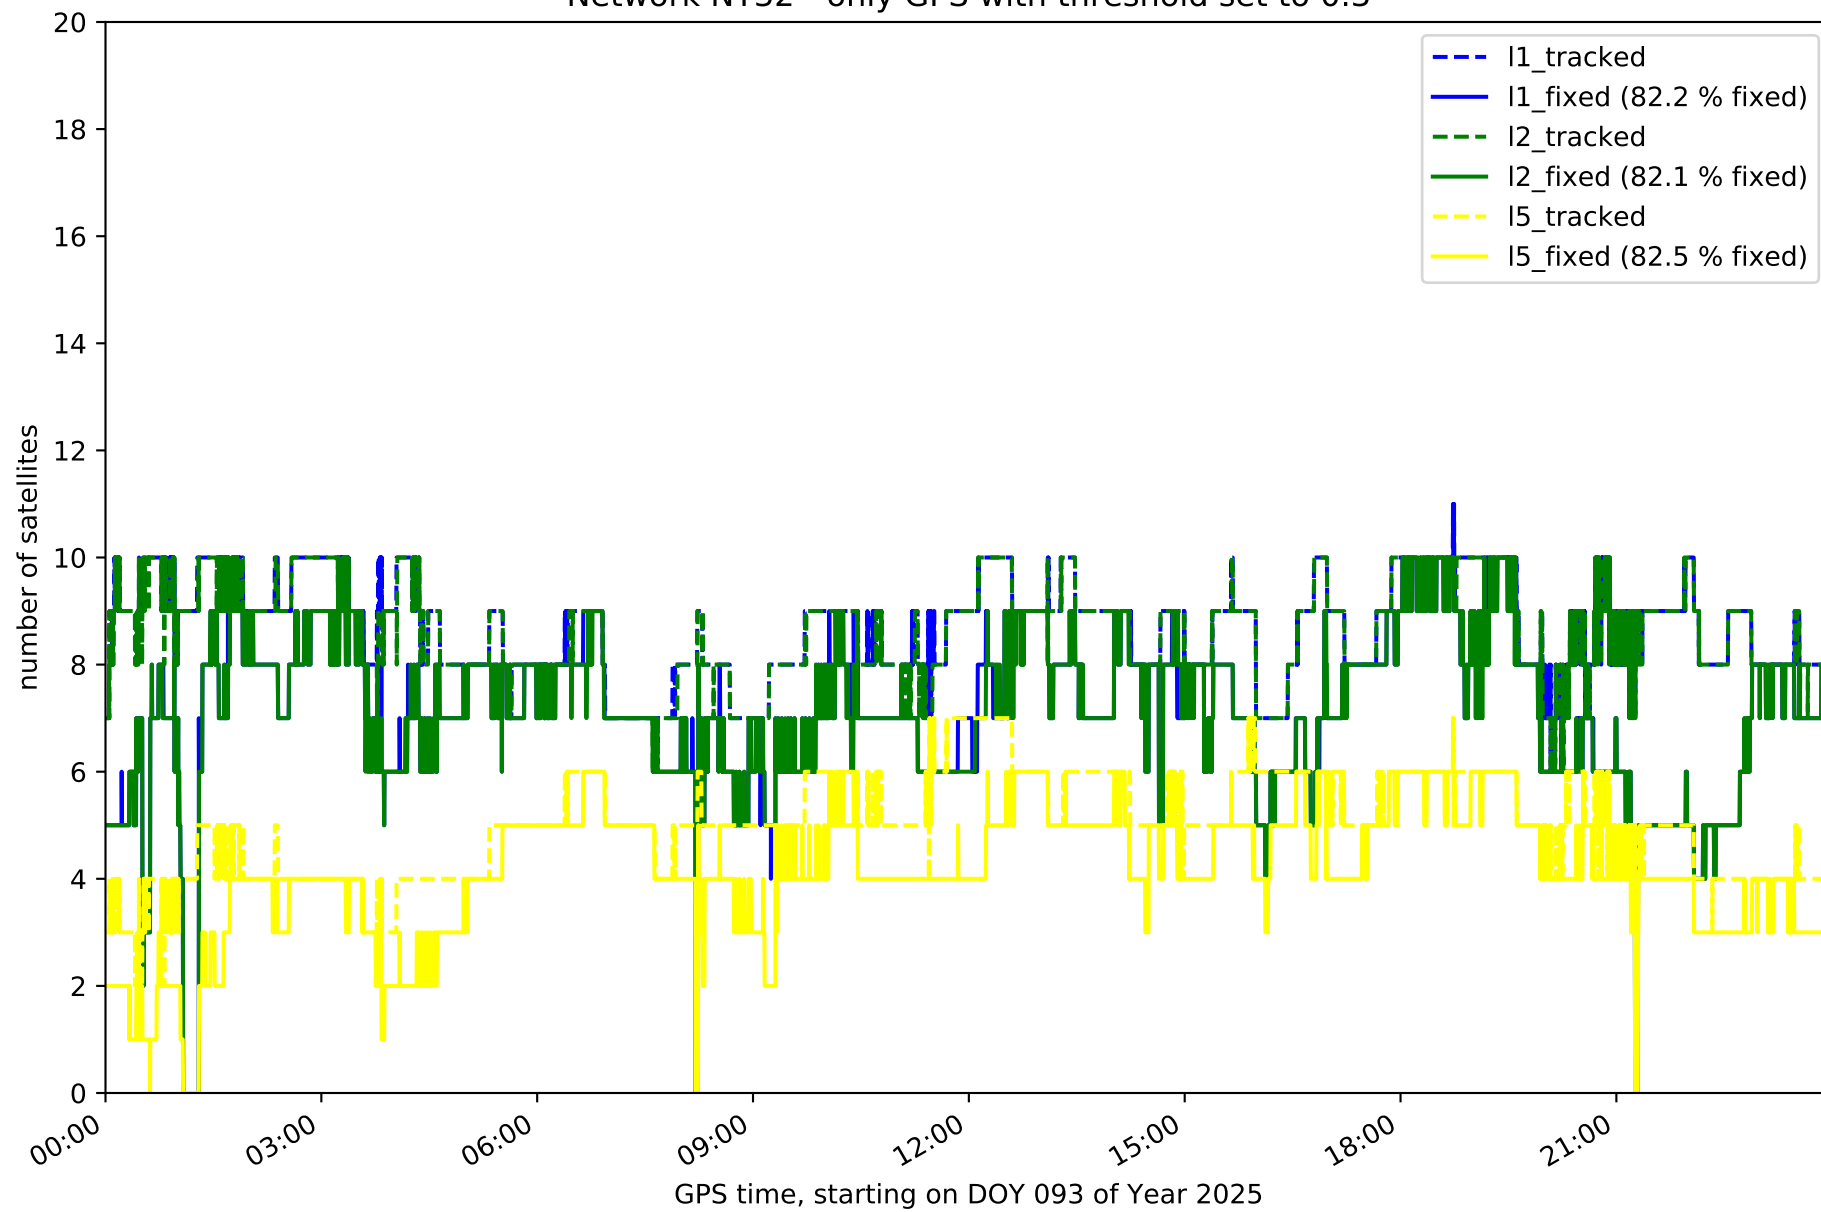


Network NT32 - only GLONASS with threshold set to 0.3

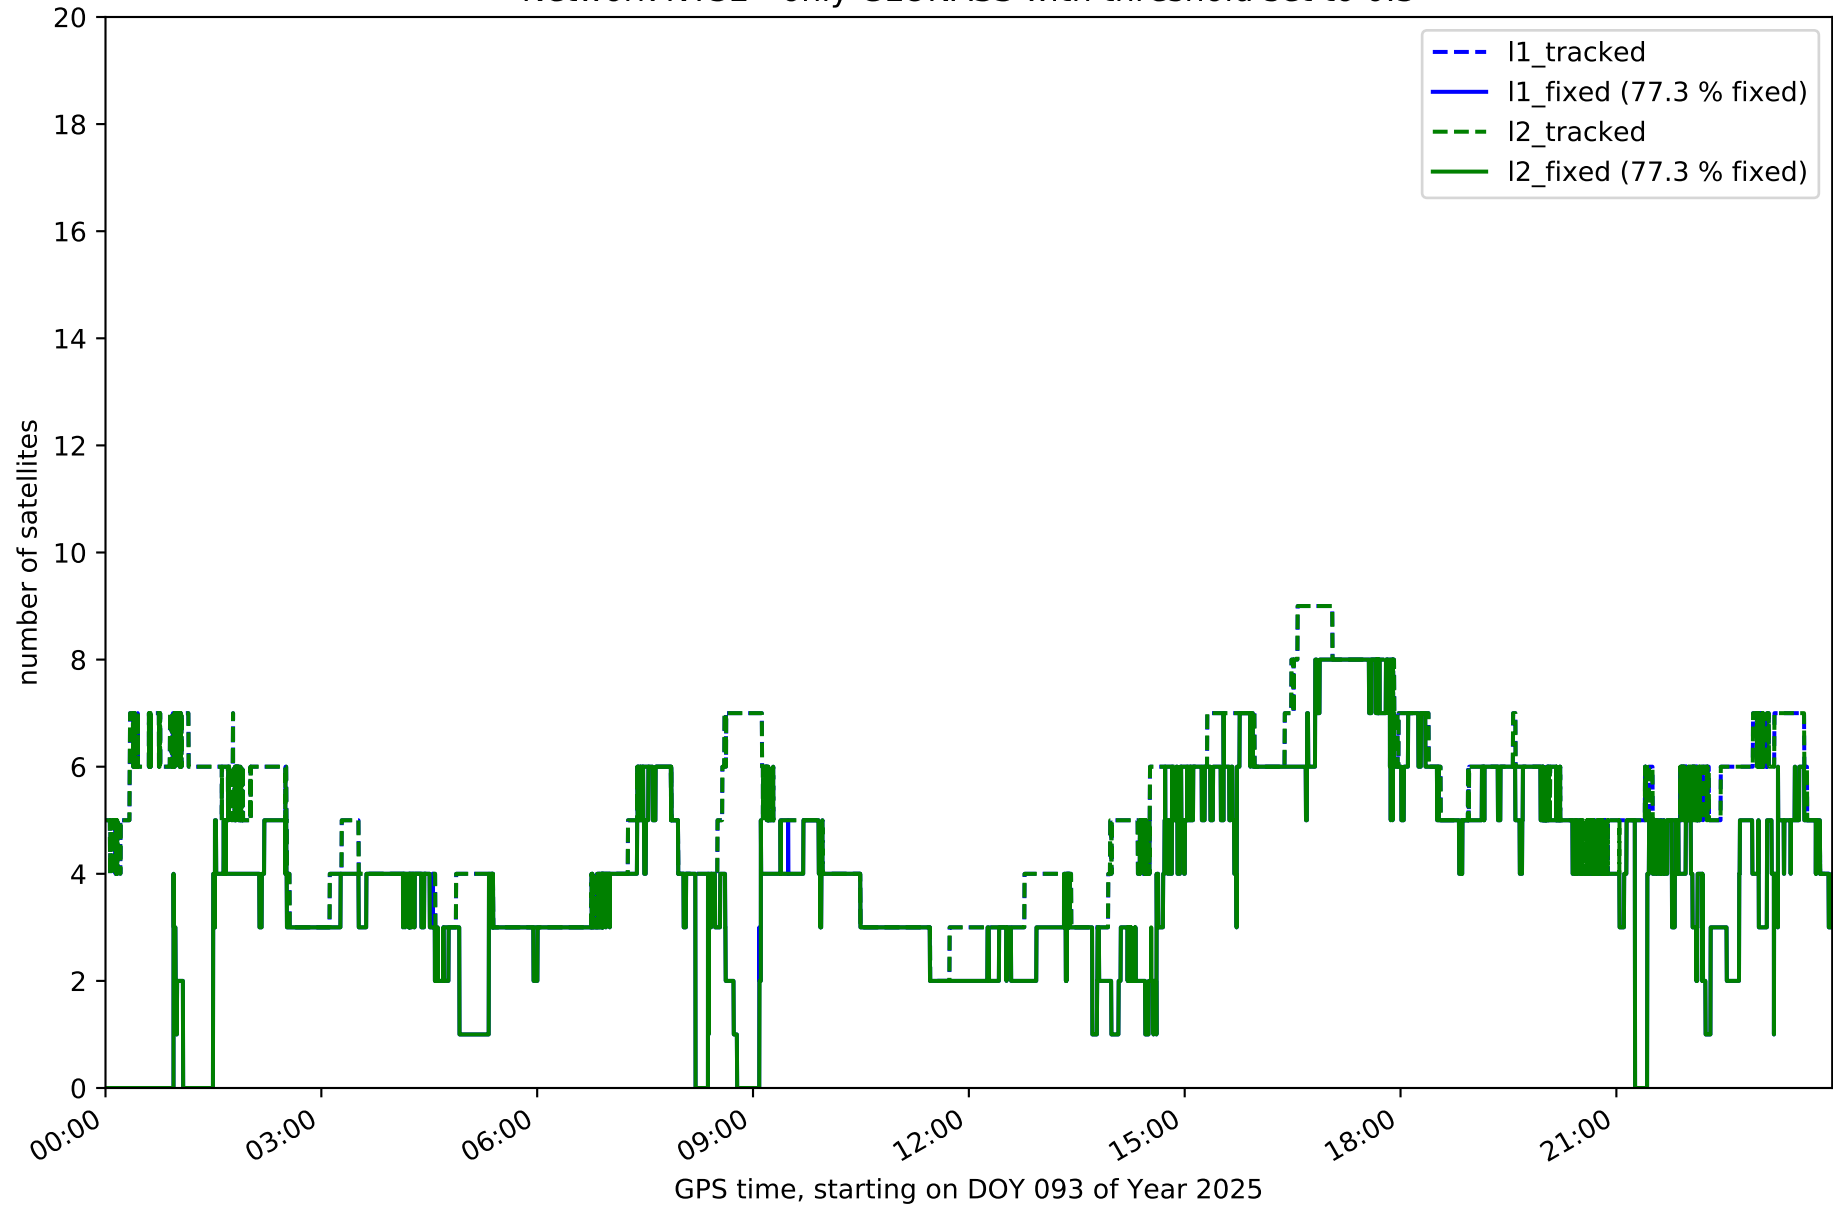


Network NT32 - only BDS with threshold set to 0.3

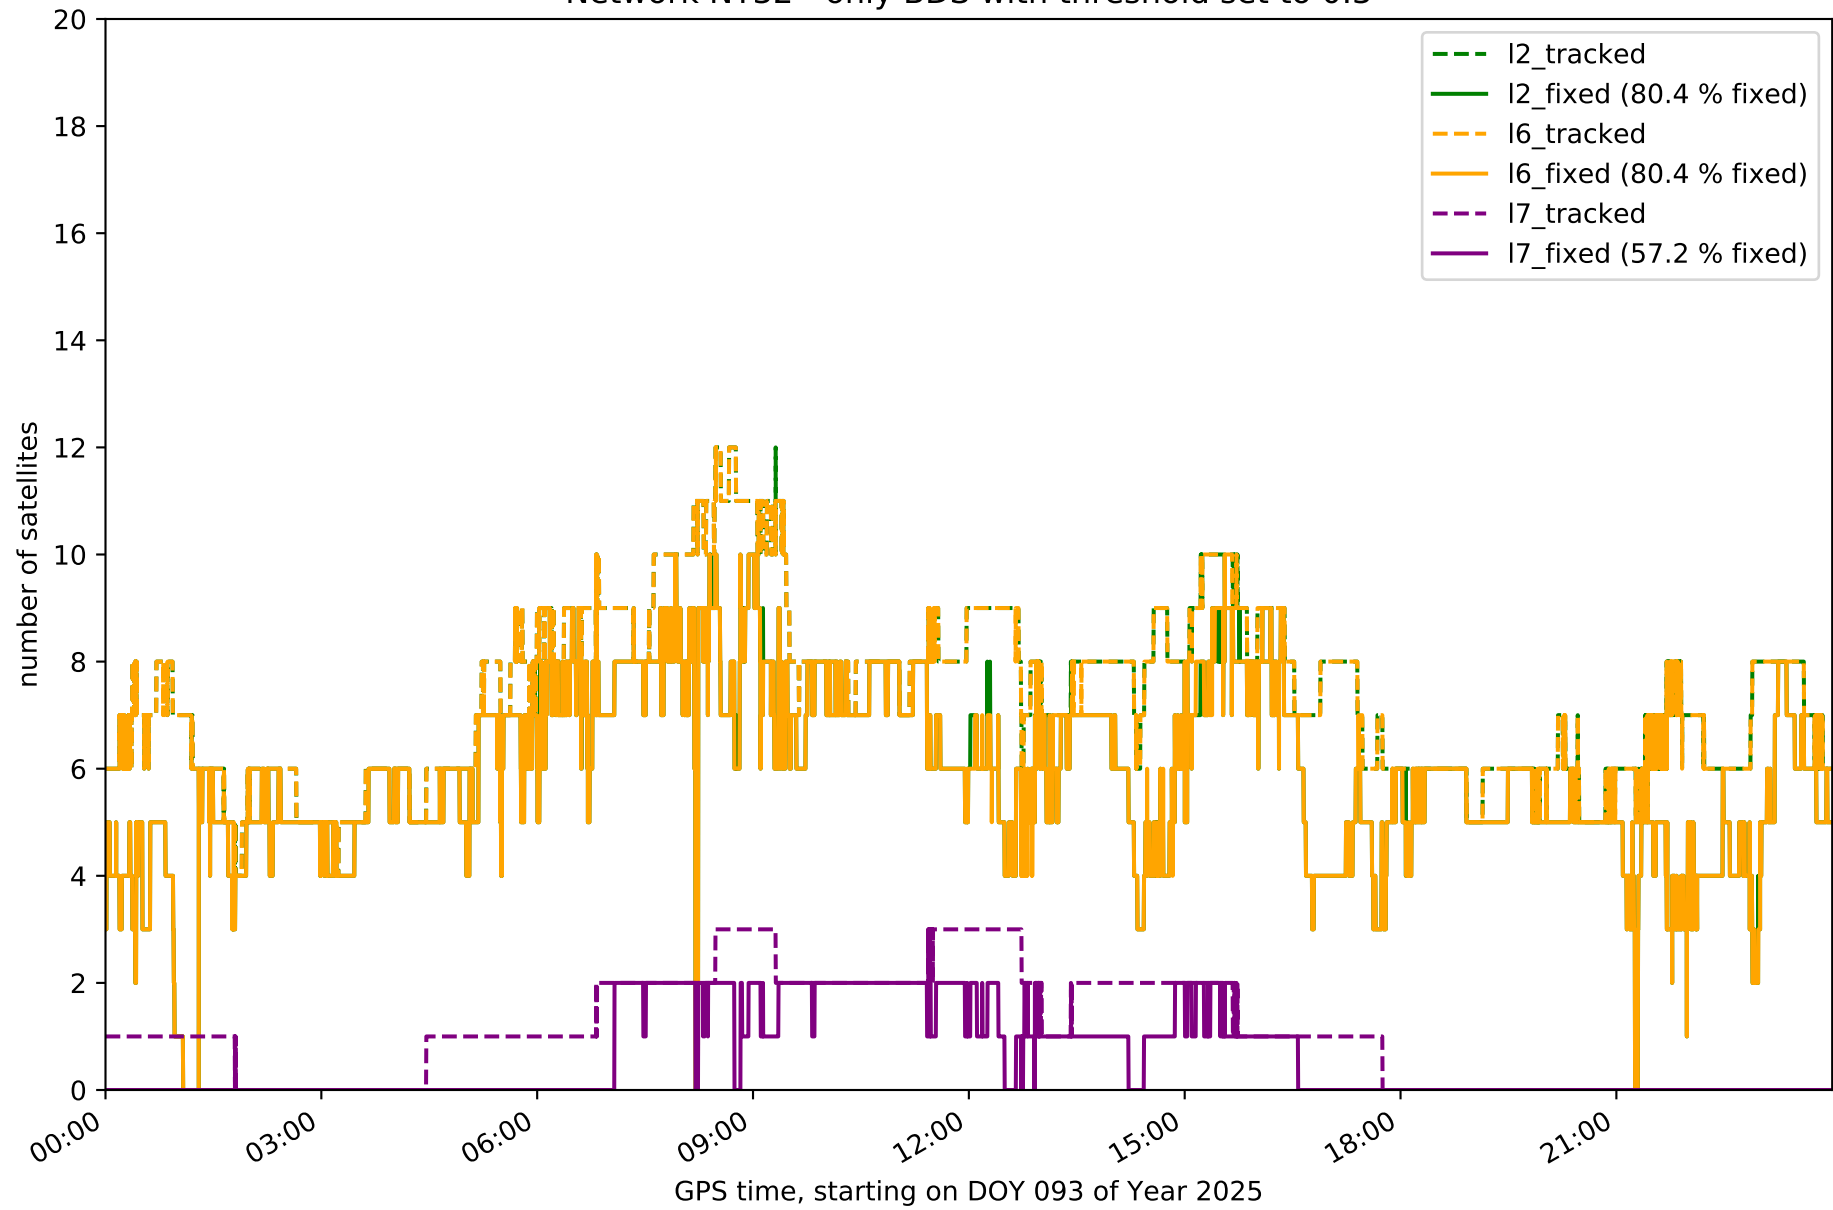


Network NT32 - only Galileo with threshold set to 0.3

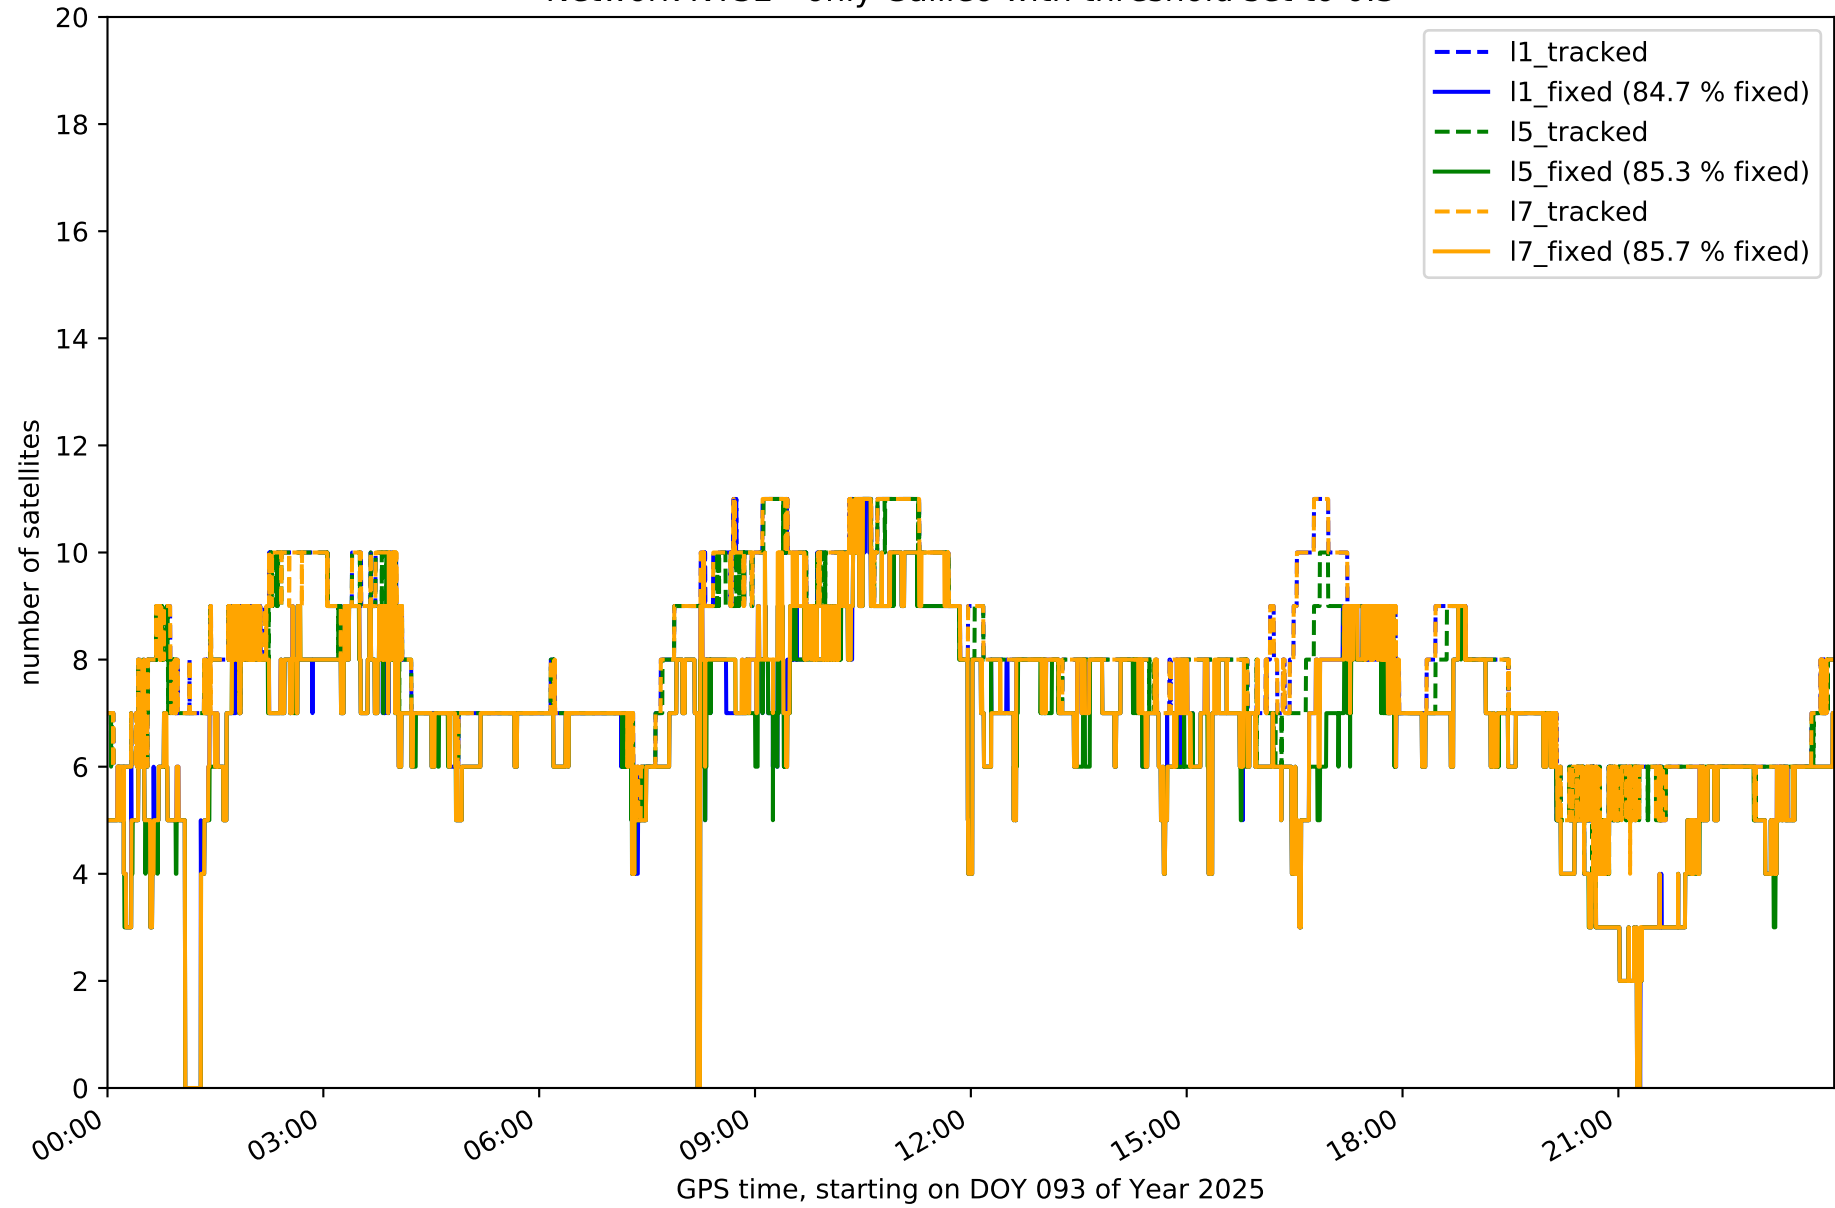


Station EH01 in network NT32

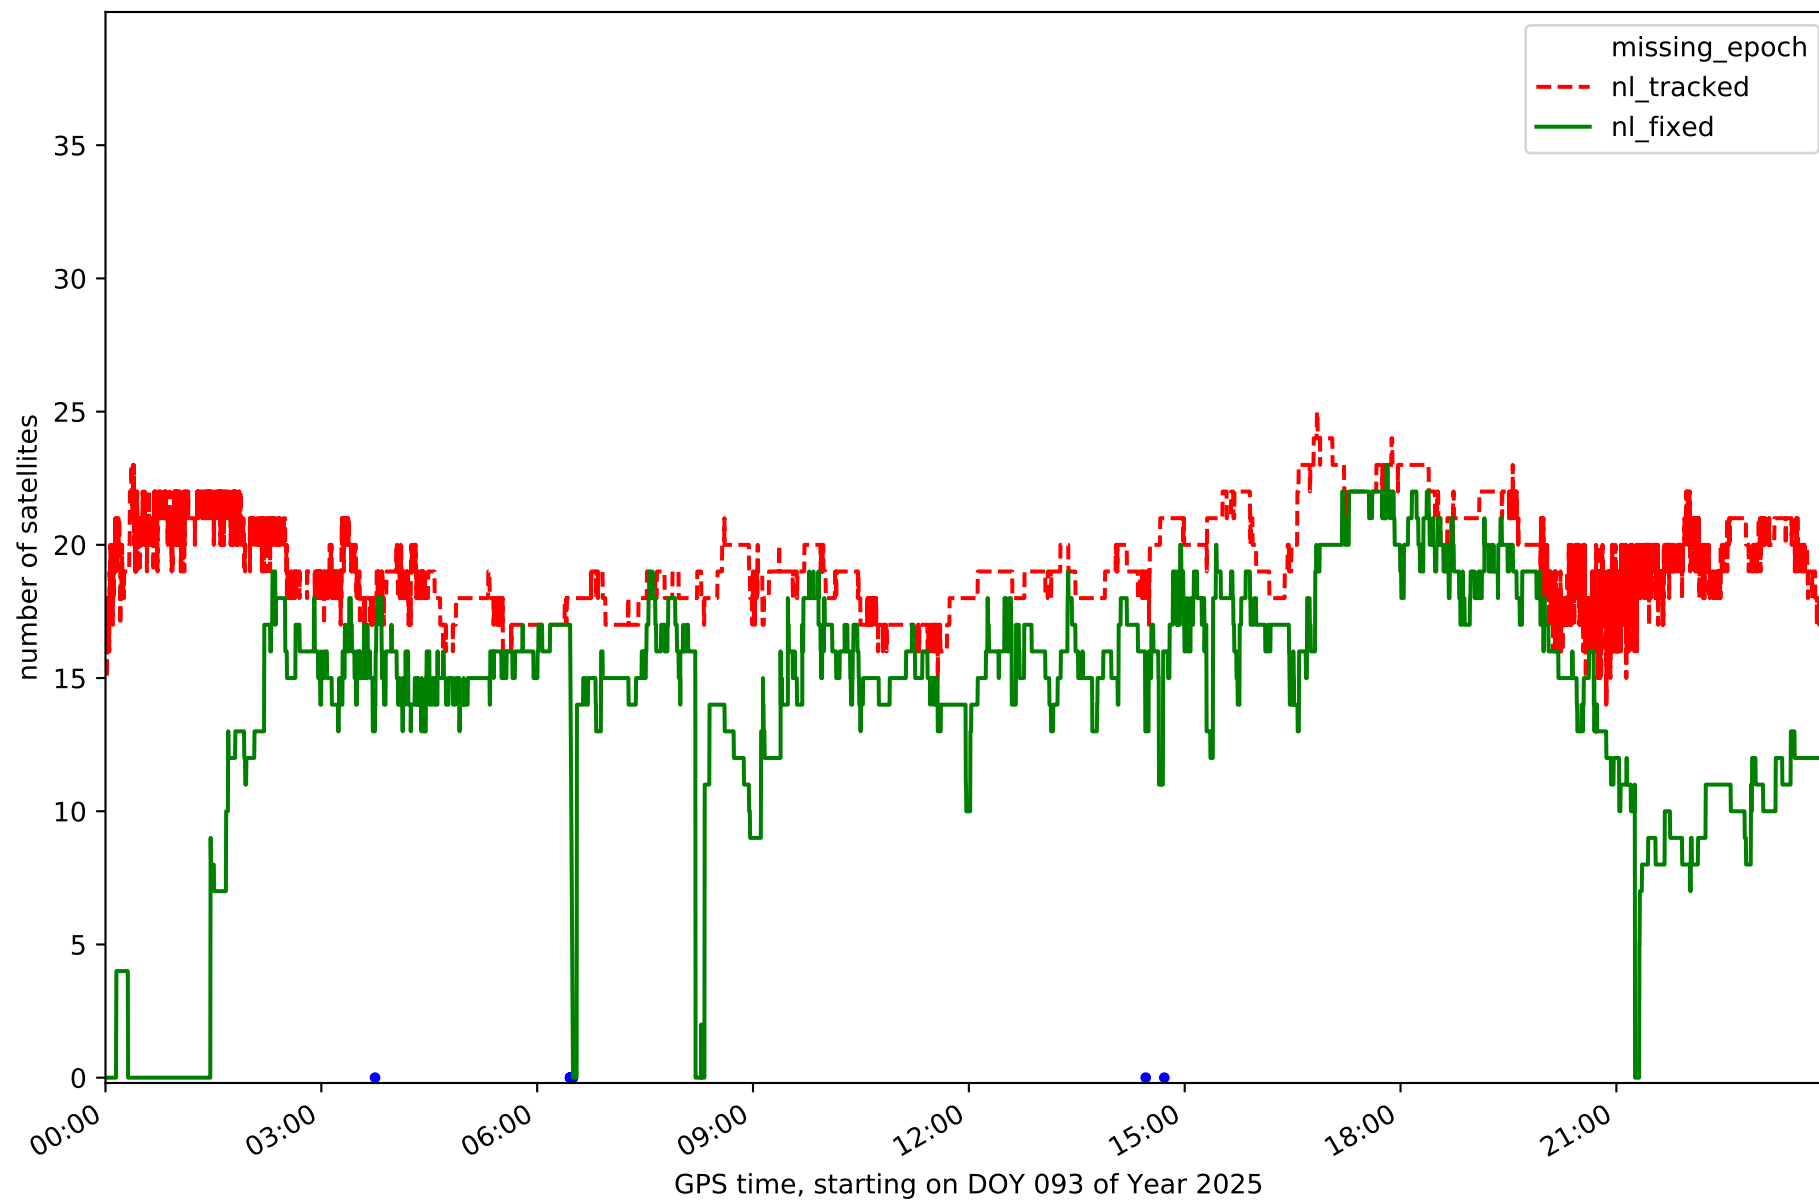


Station EH02 in network NT32

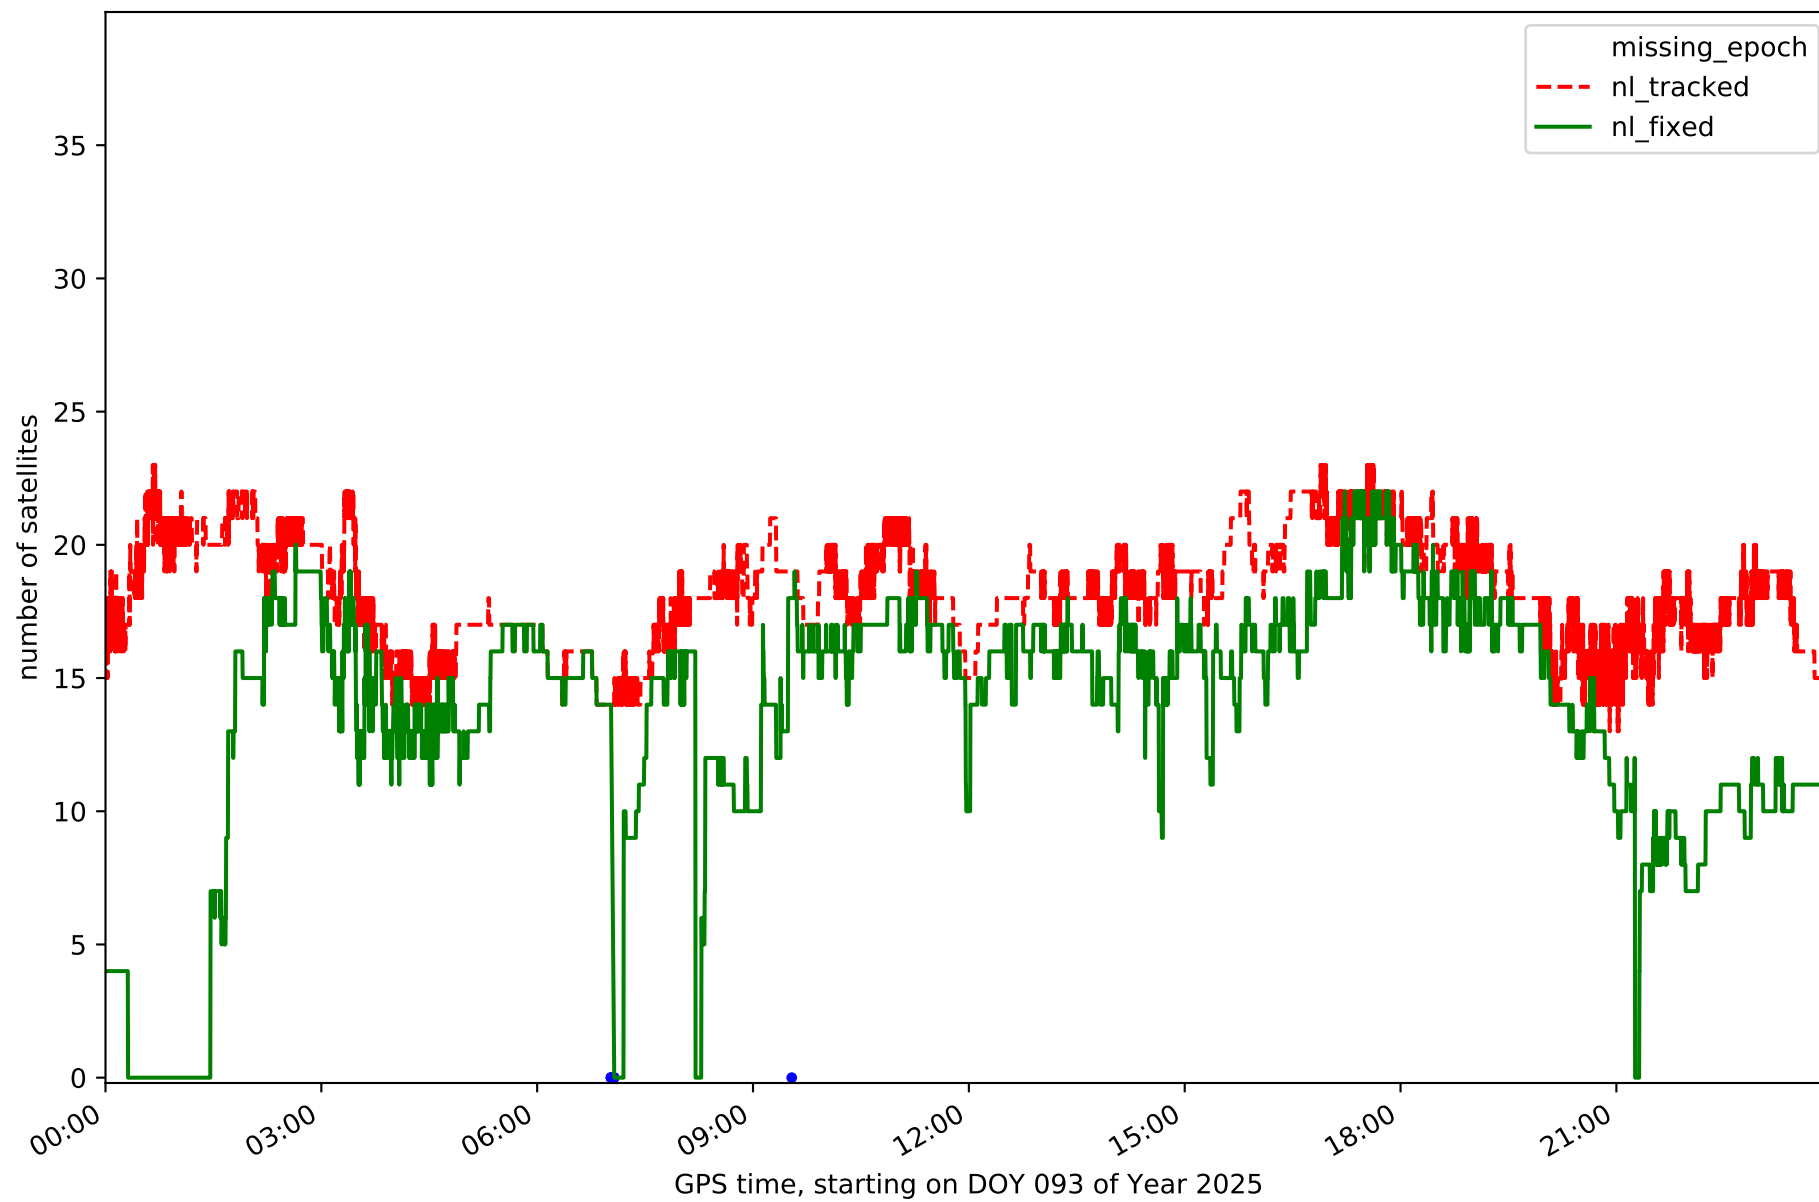


Station GOM1 in network NT32

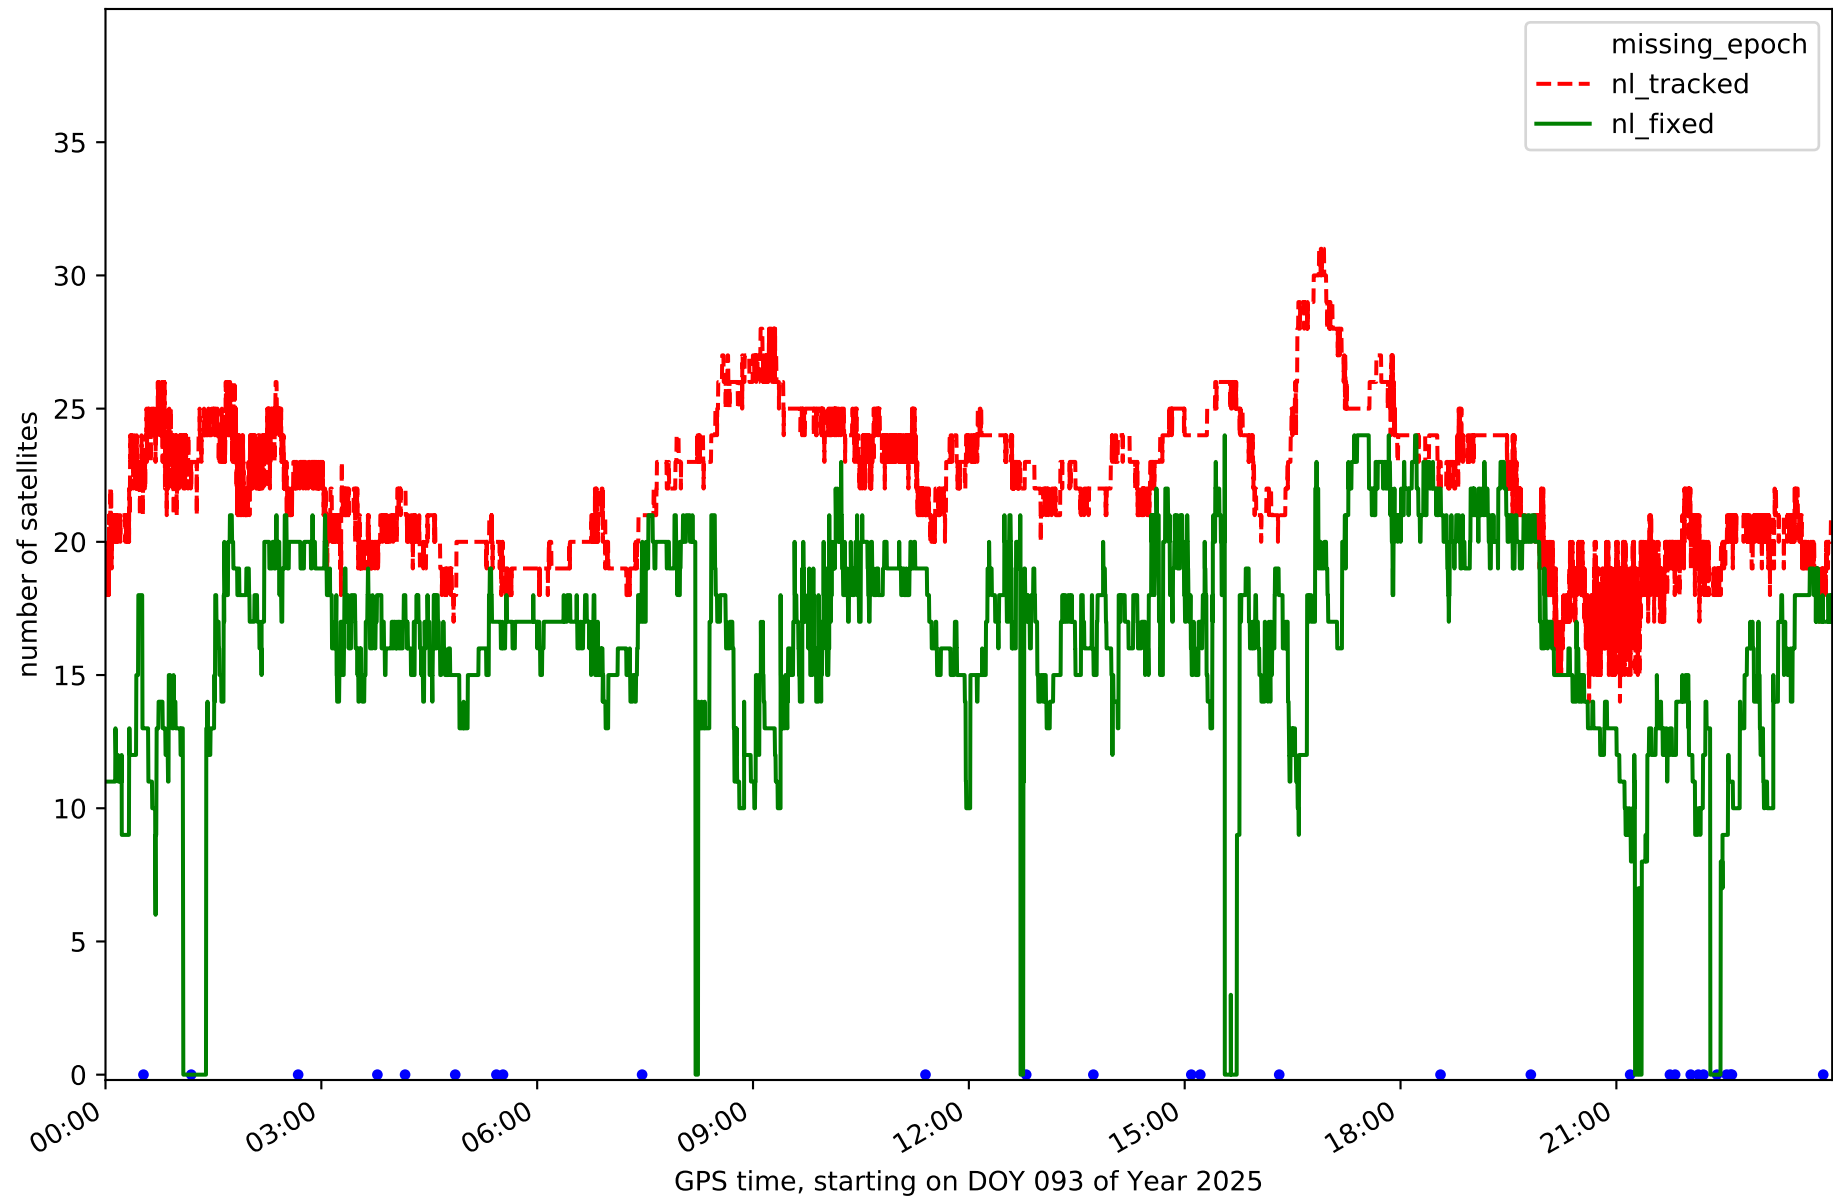


Station IZAN in network NT32

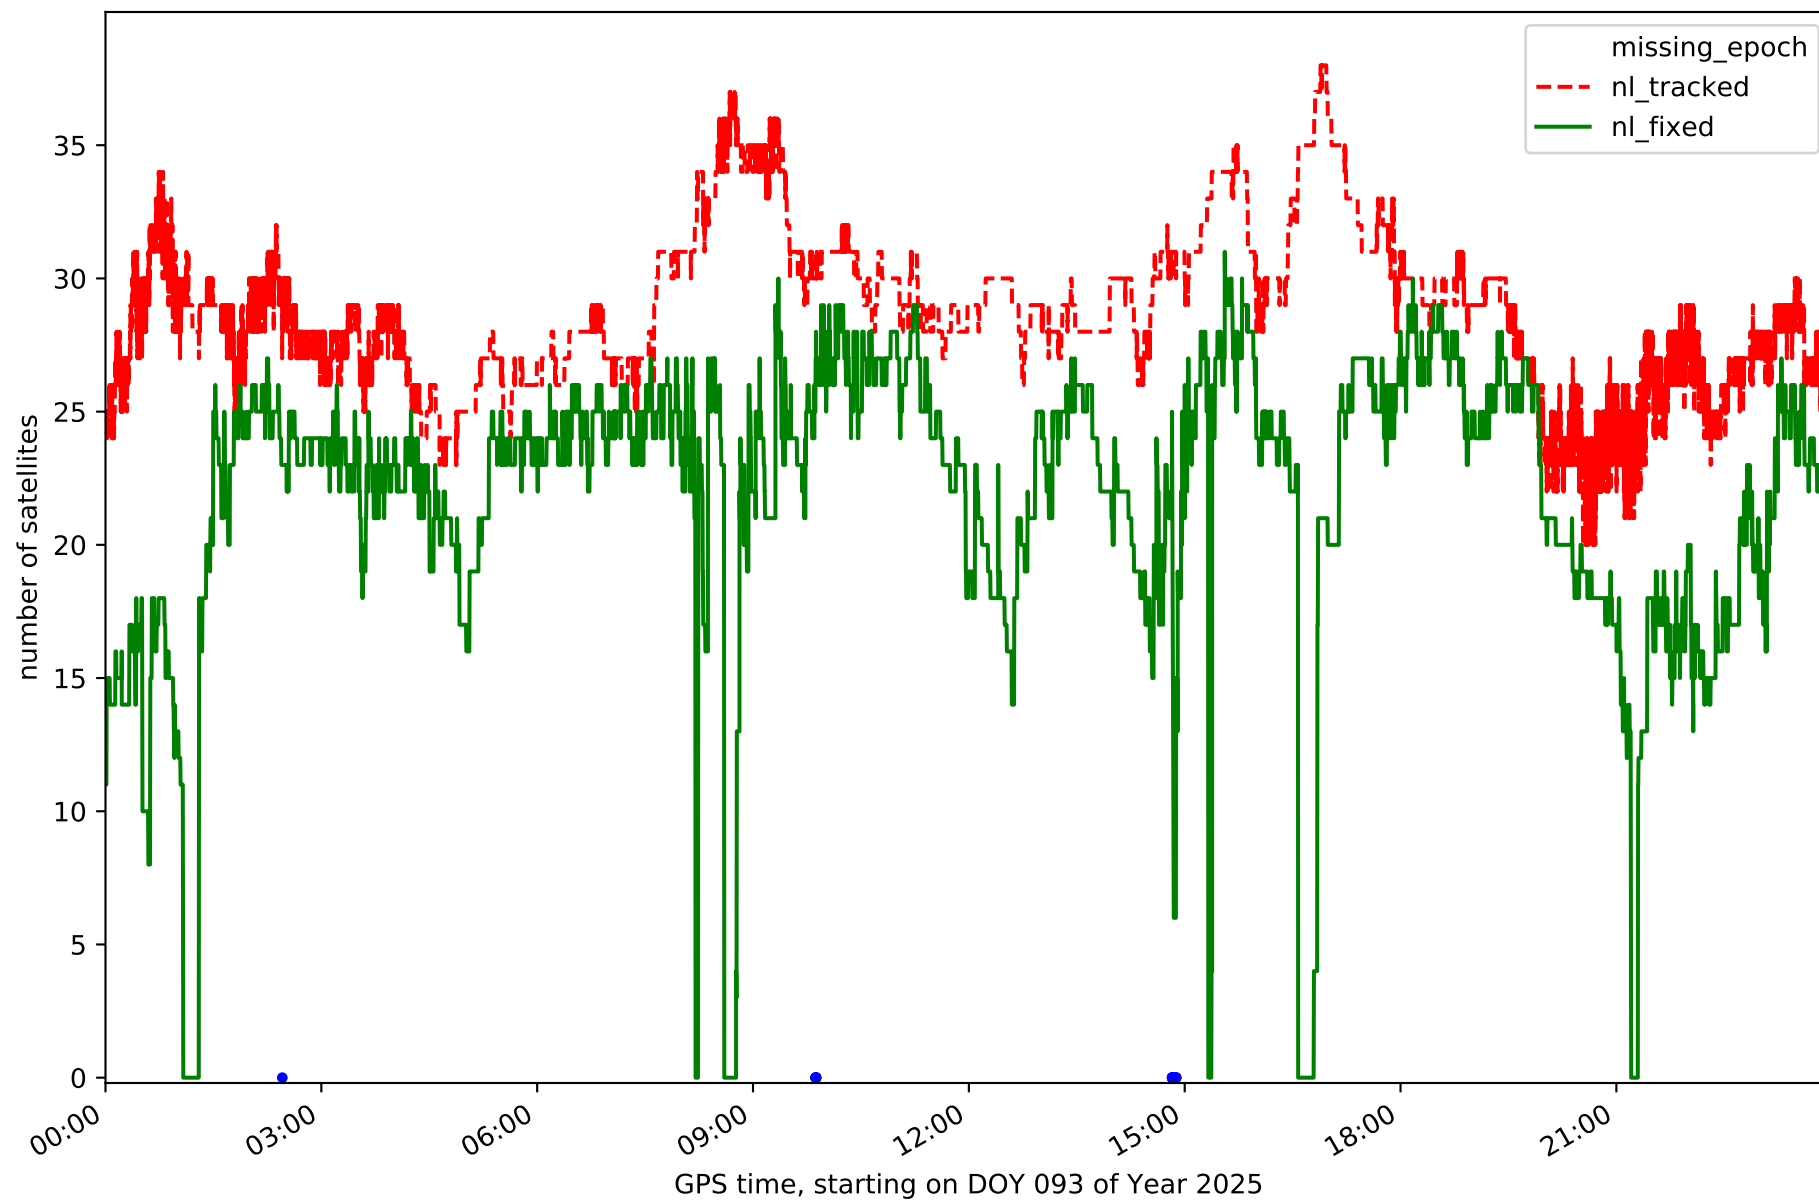


Station LP01 in network NT32

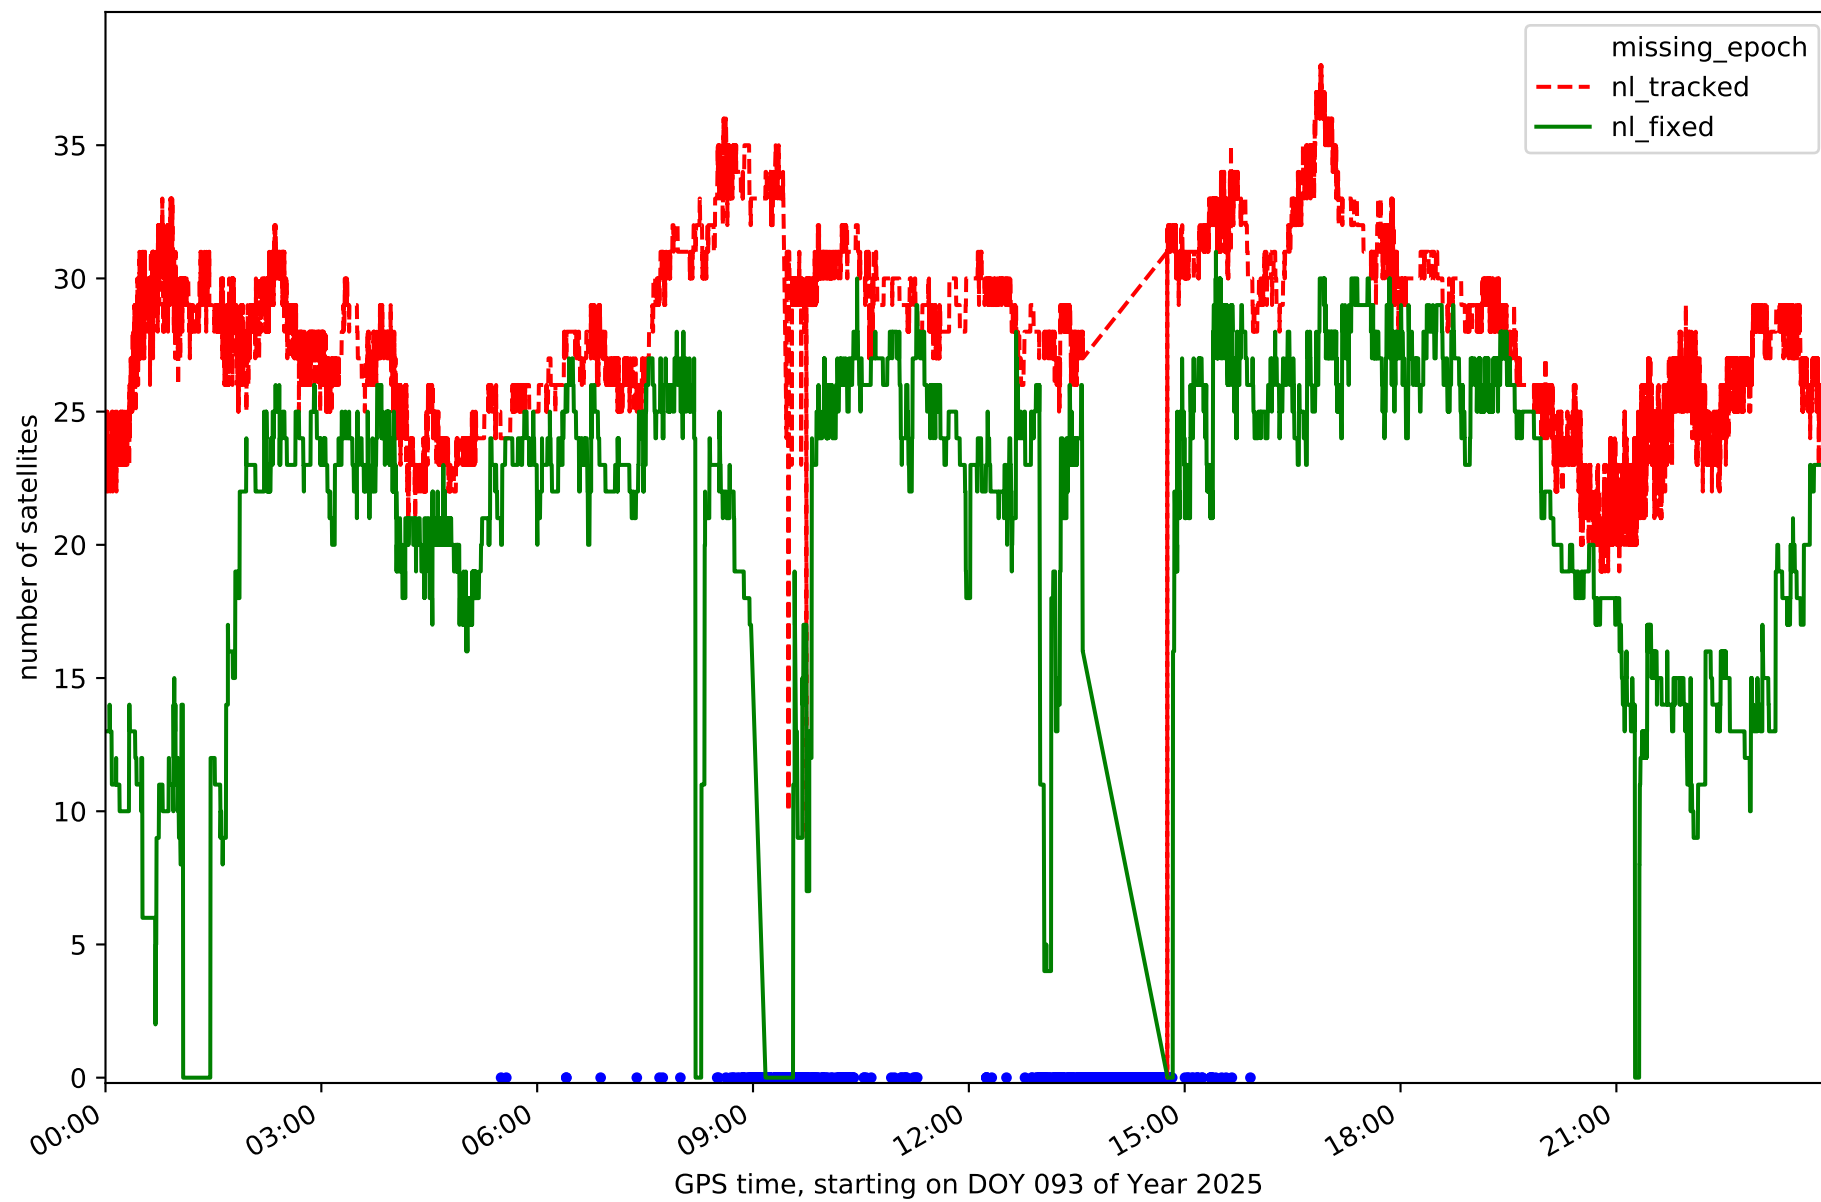


Station LP03 in network NT32

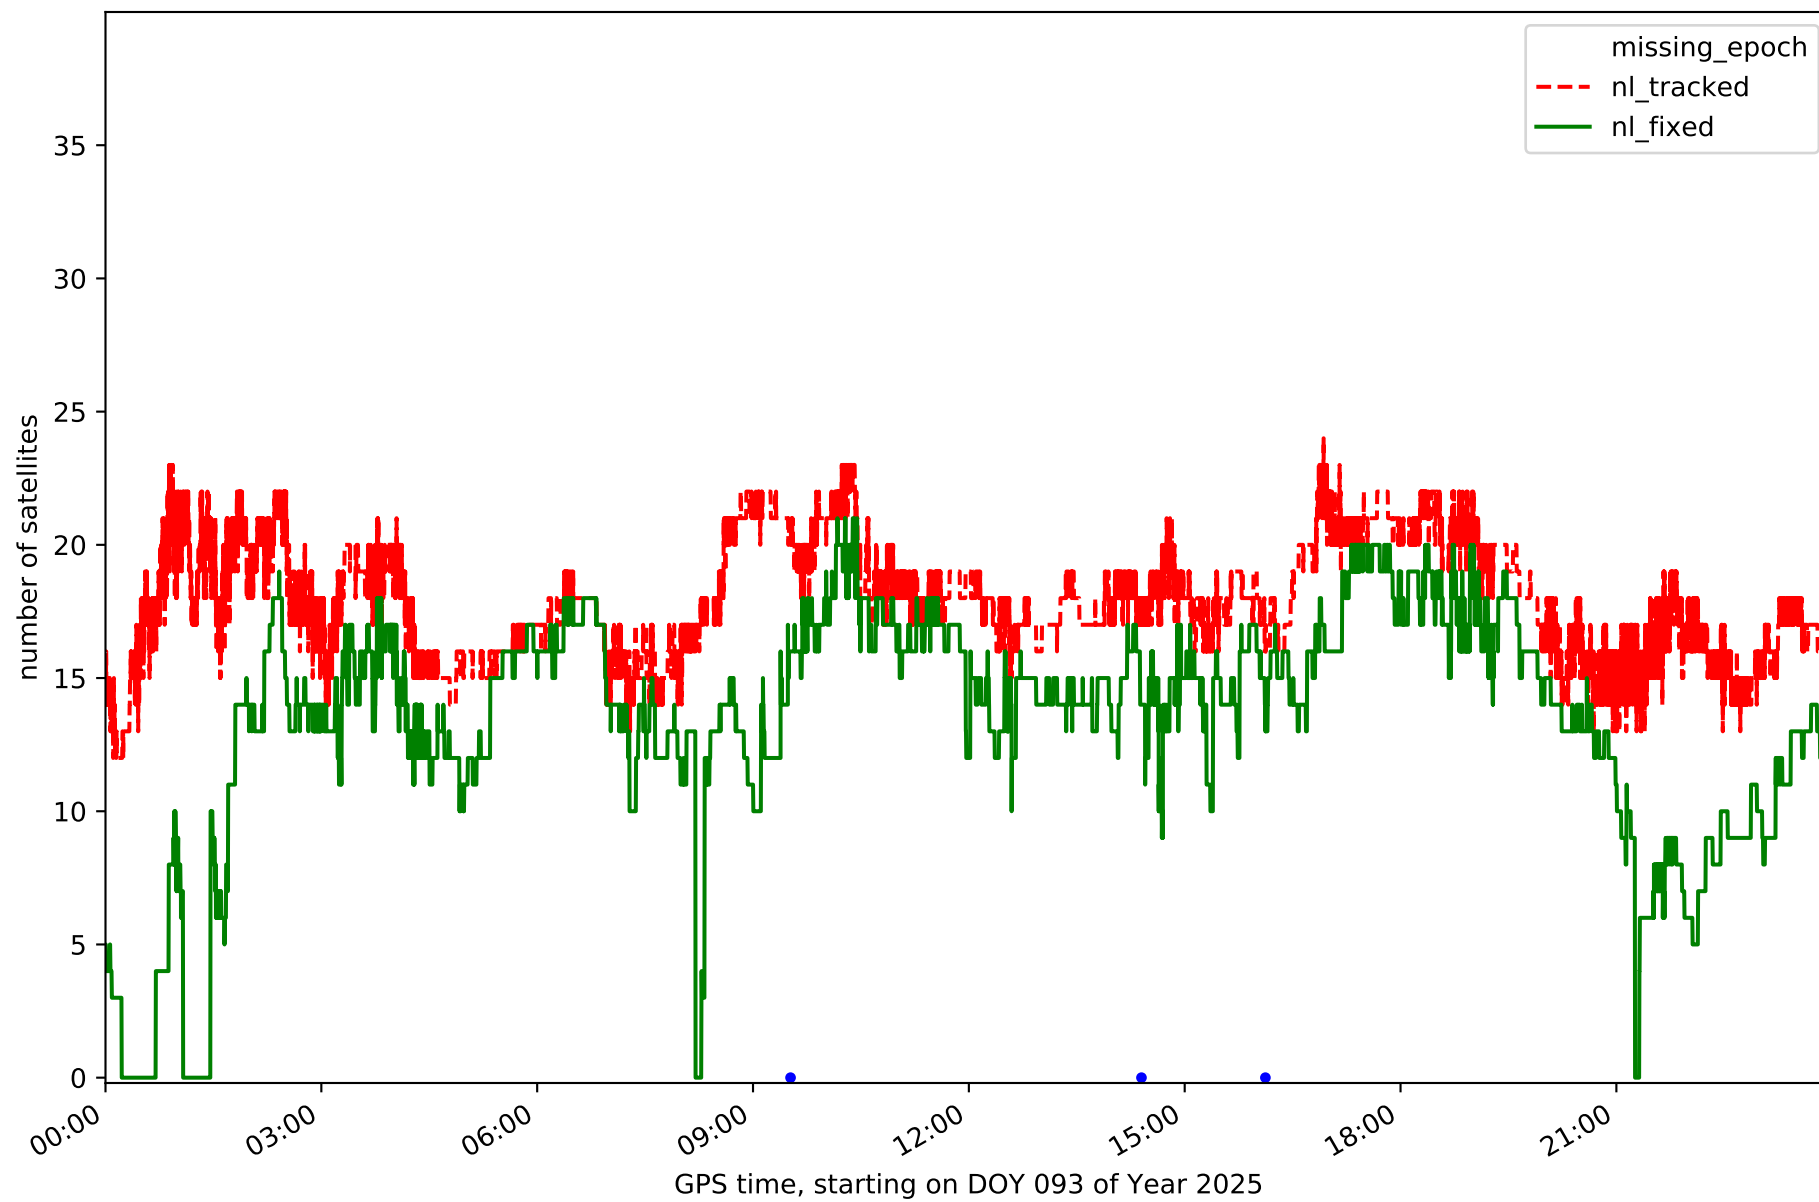


Station LPAL in network NT32

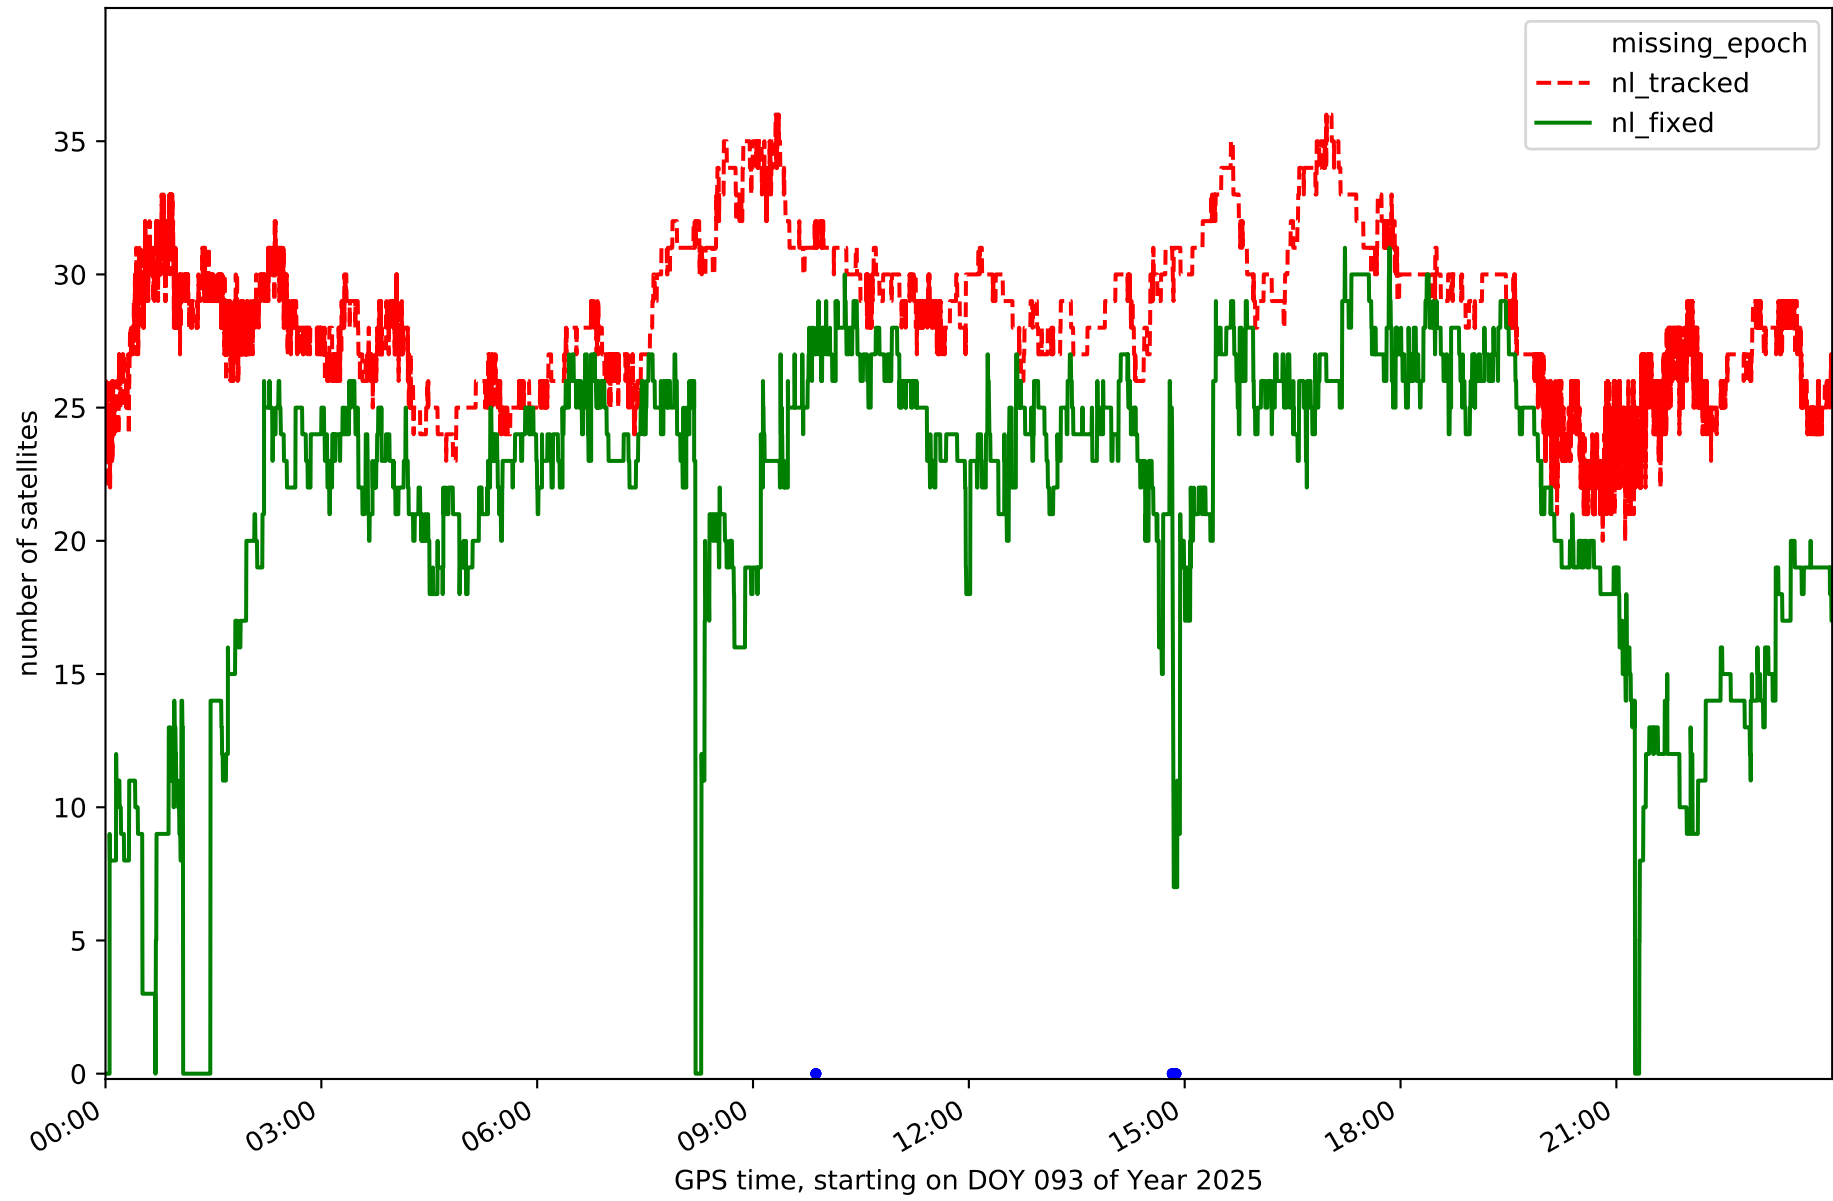


Station LRES in network NT32

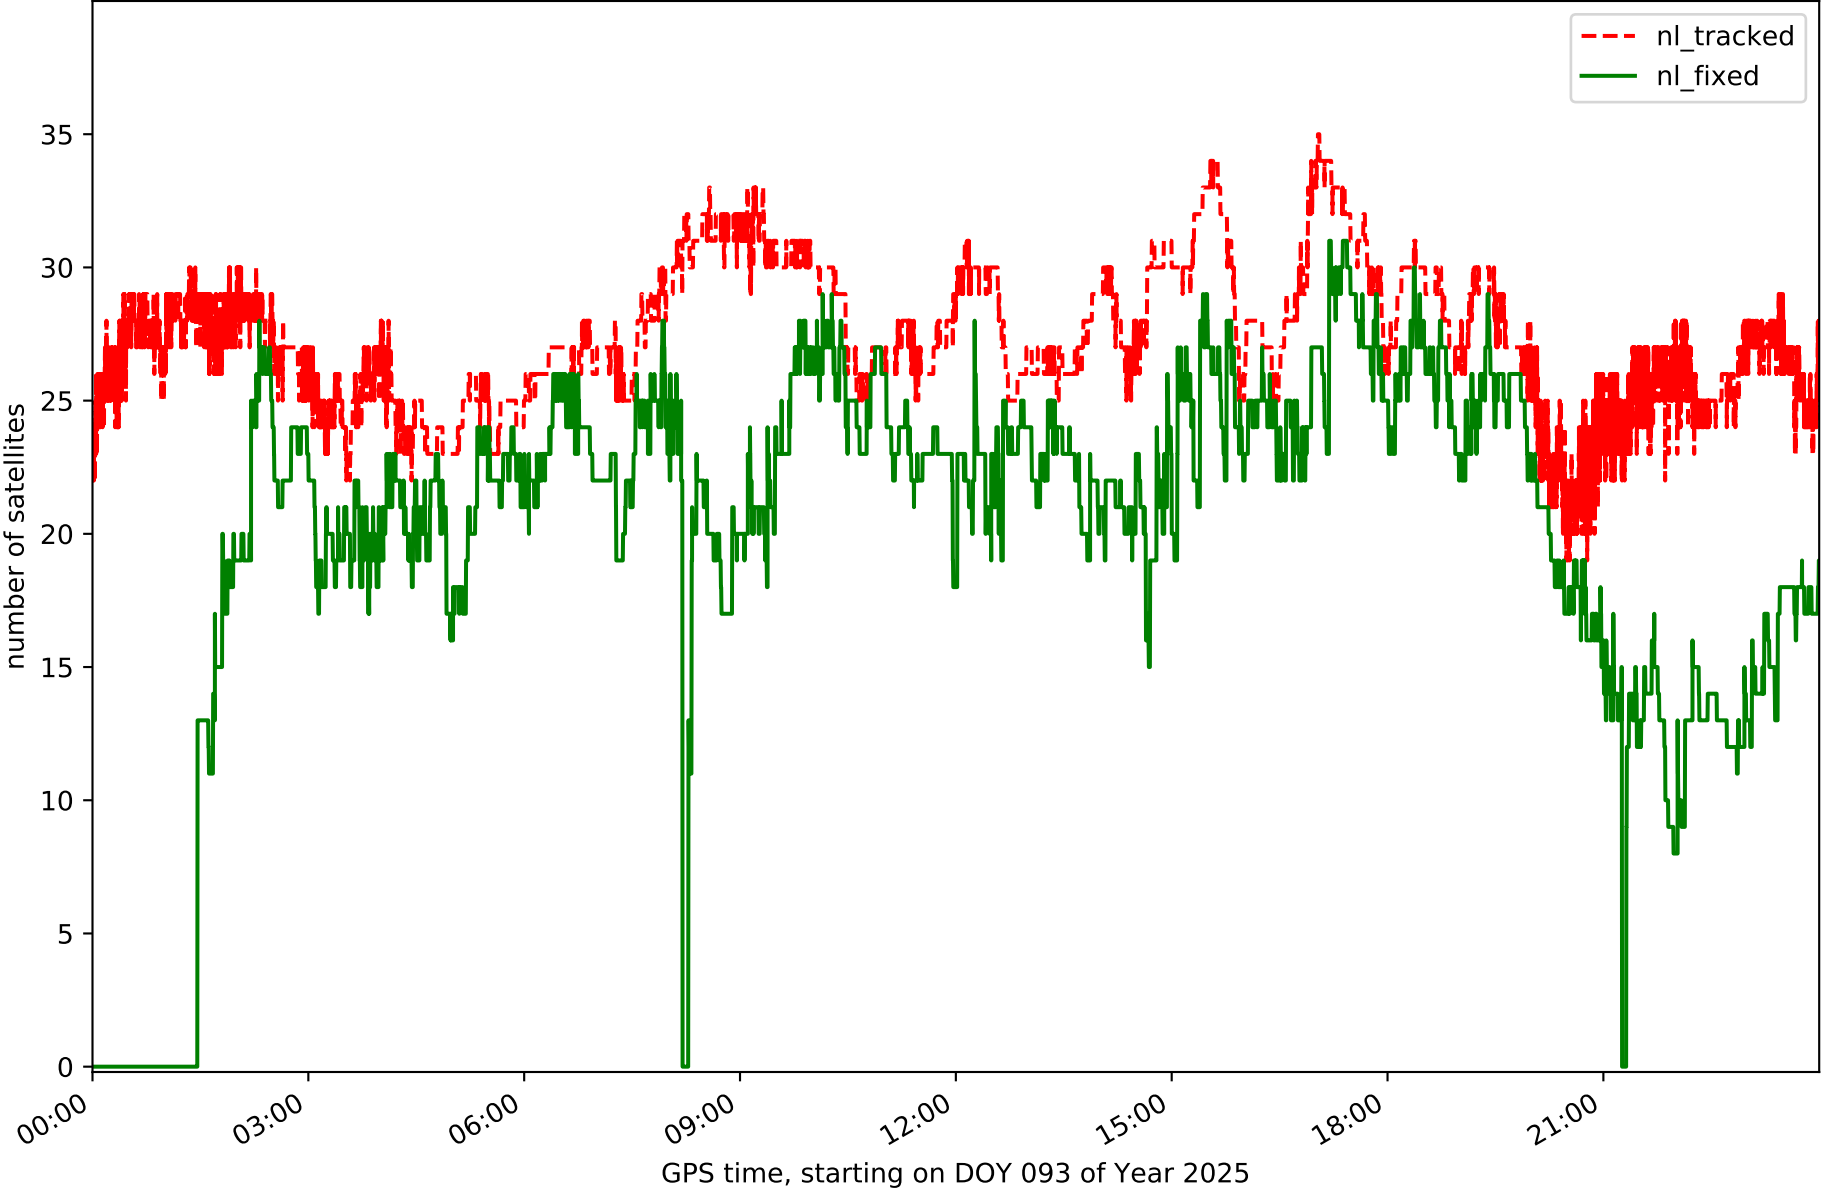


Station TN01 in network NT32

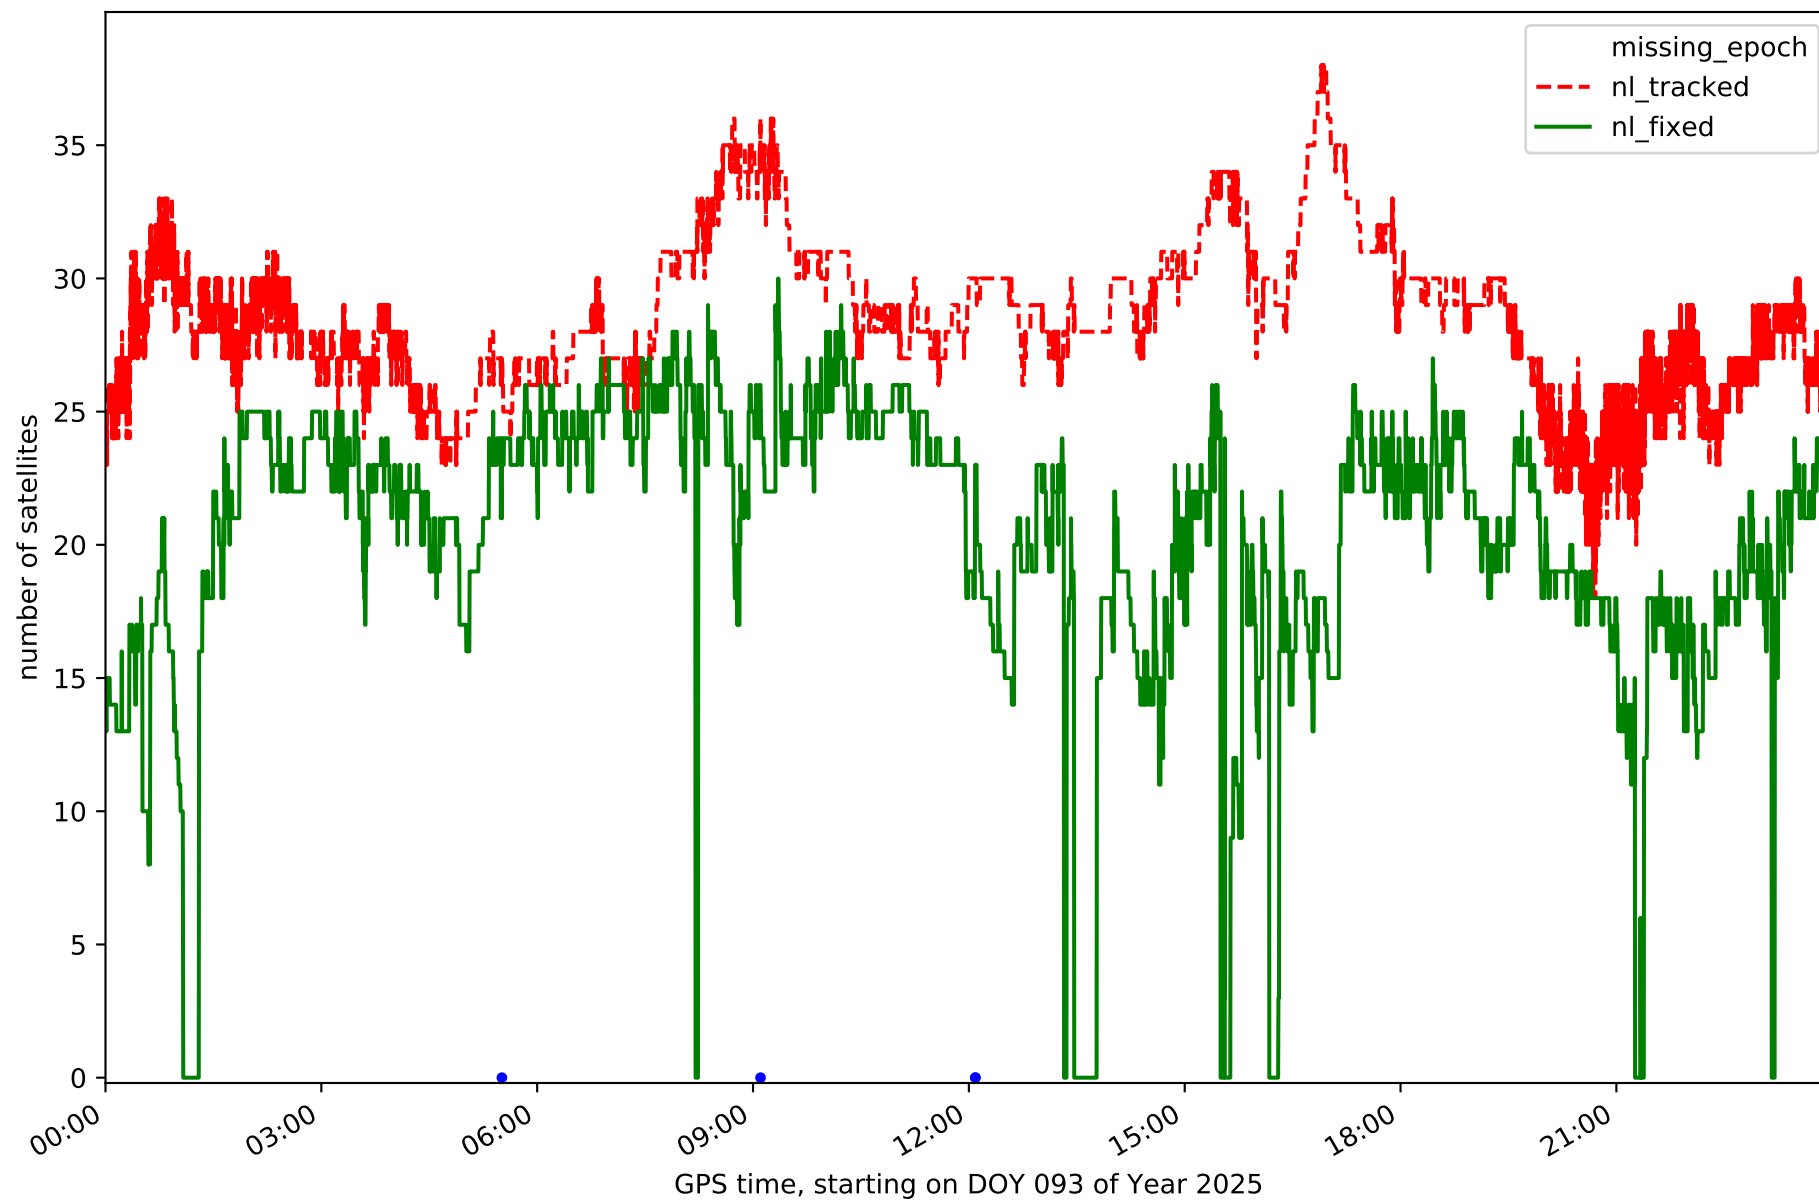


Station TN02 in network NT32

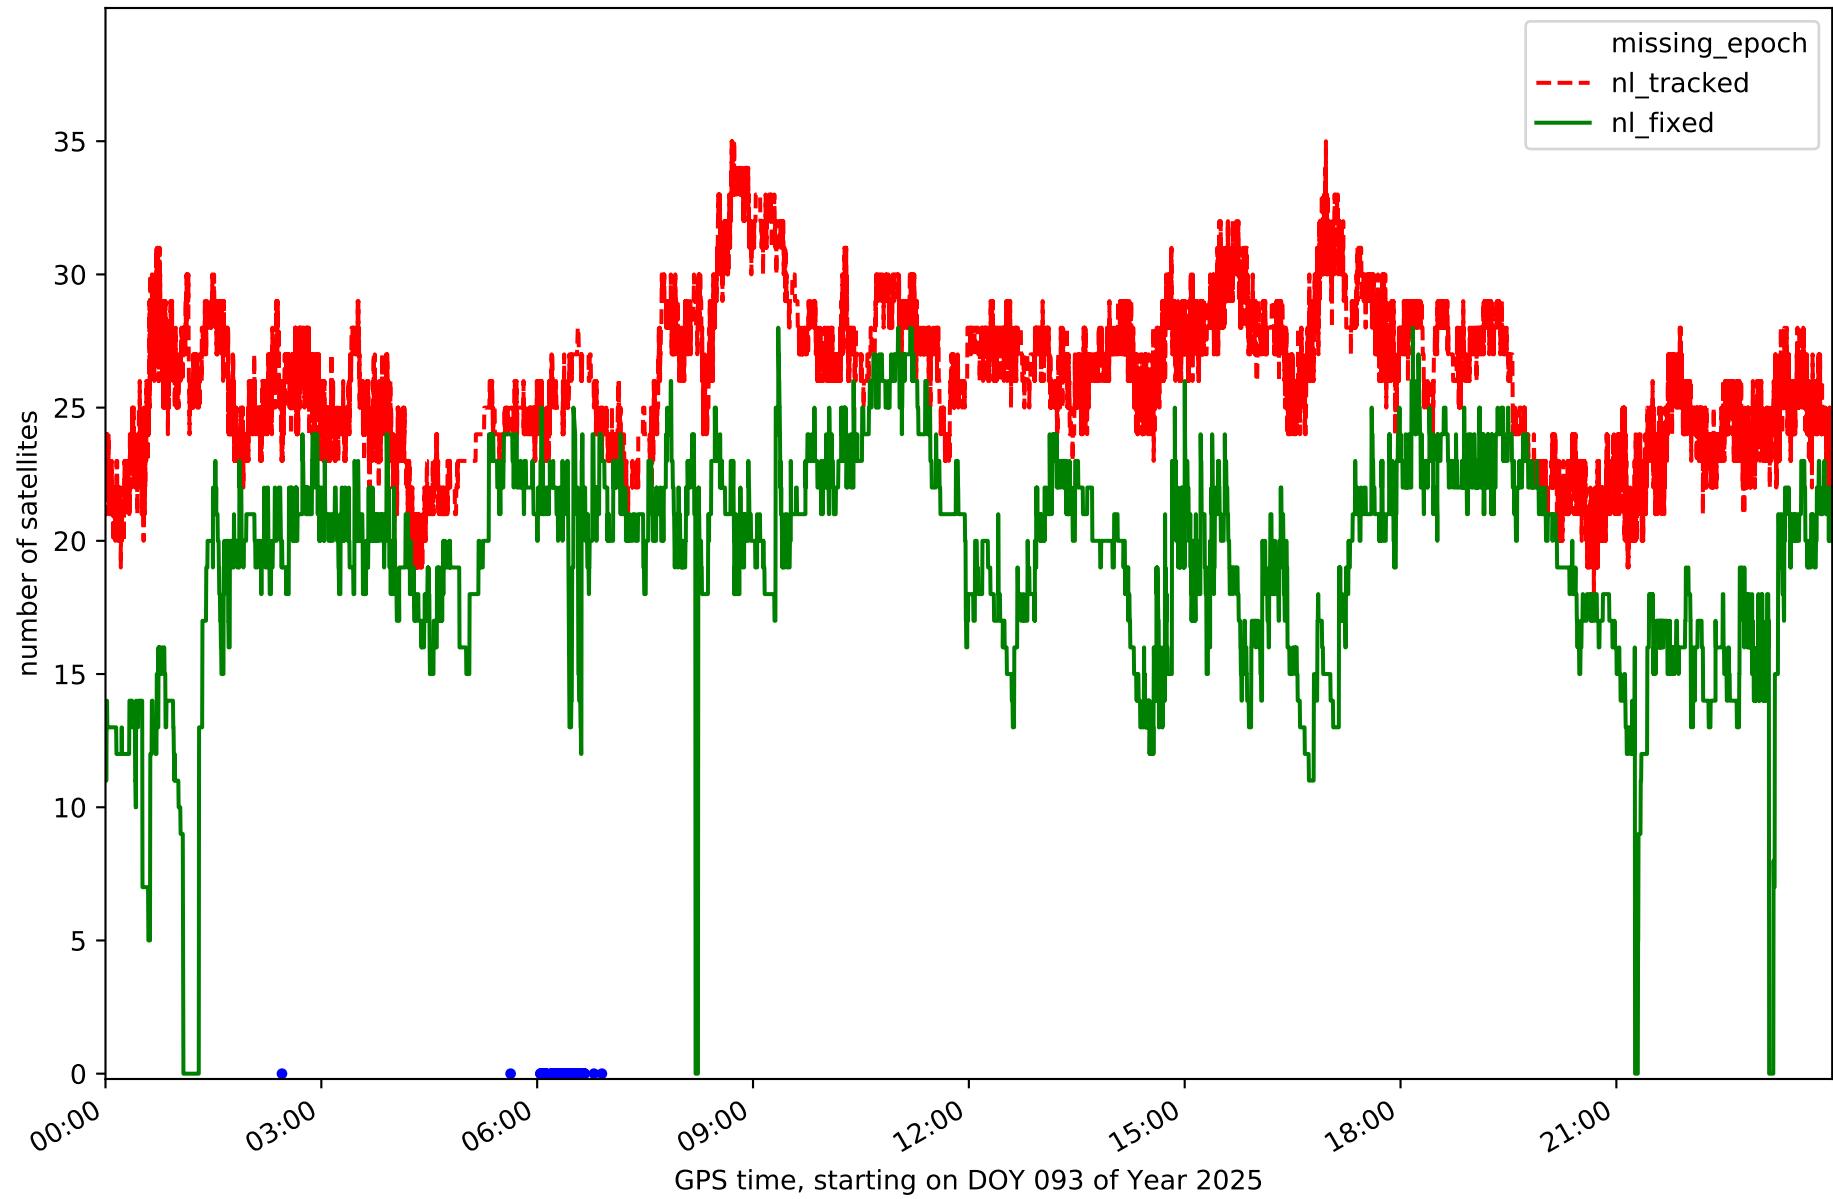


Station TN03 in network NT32

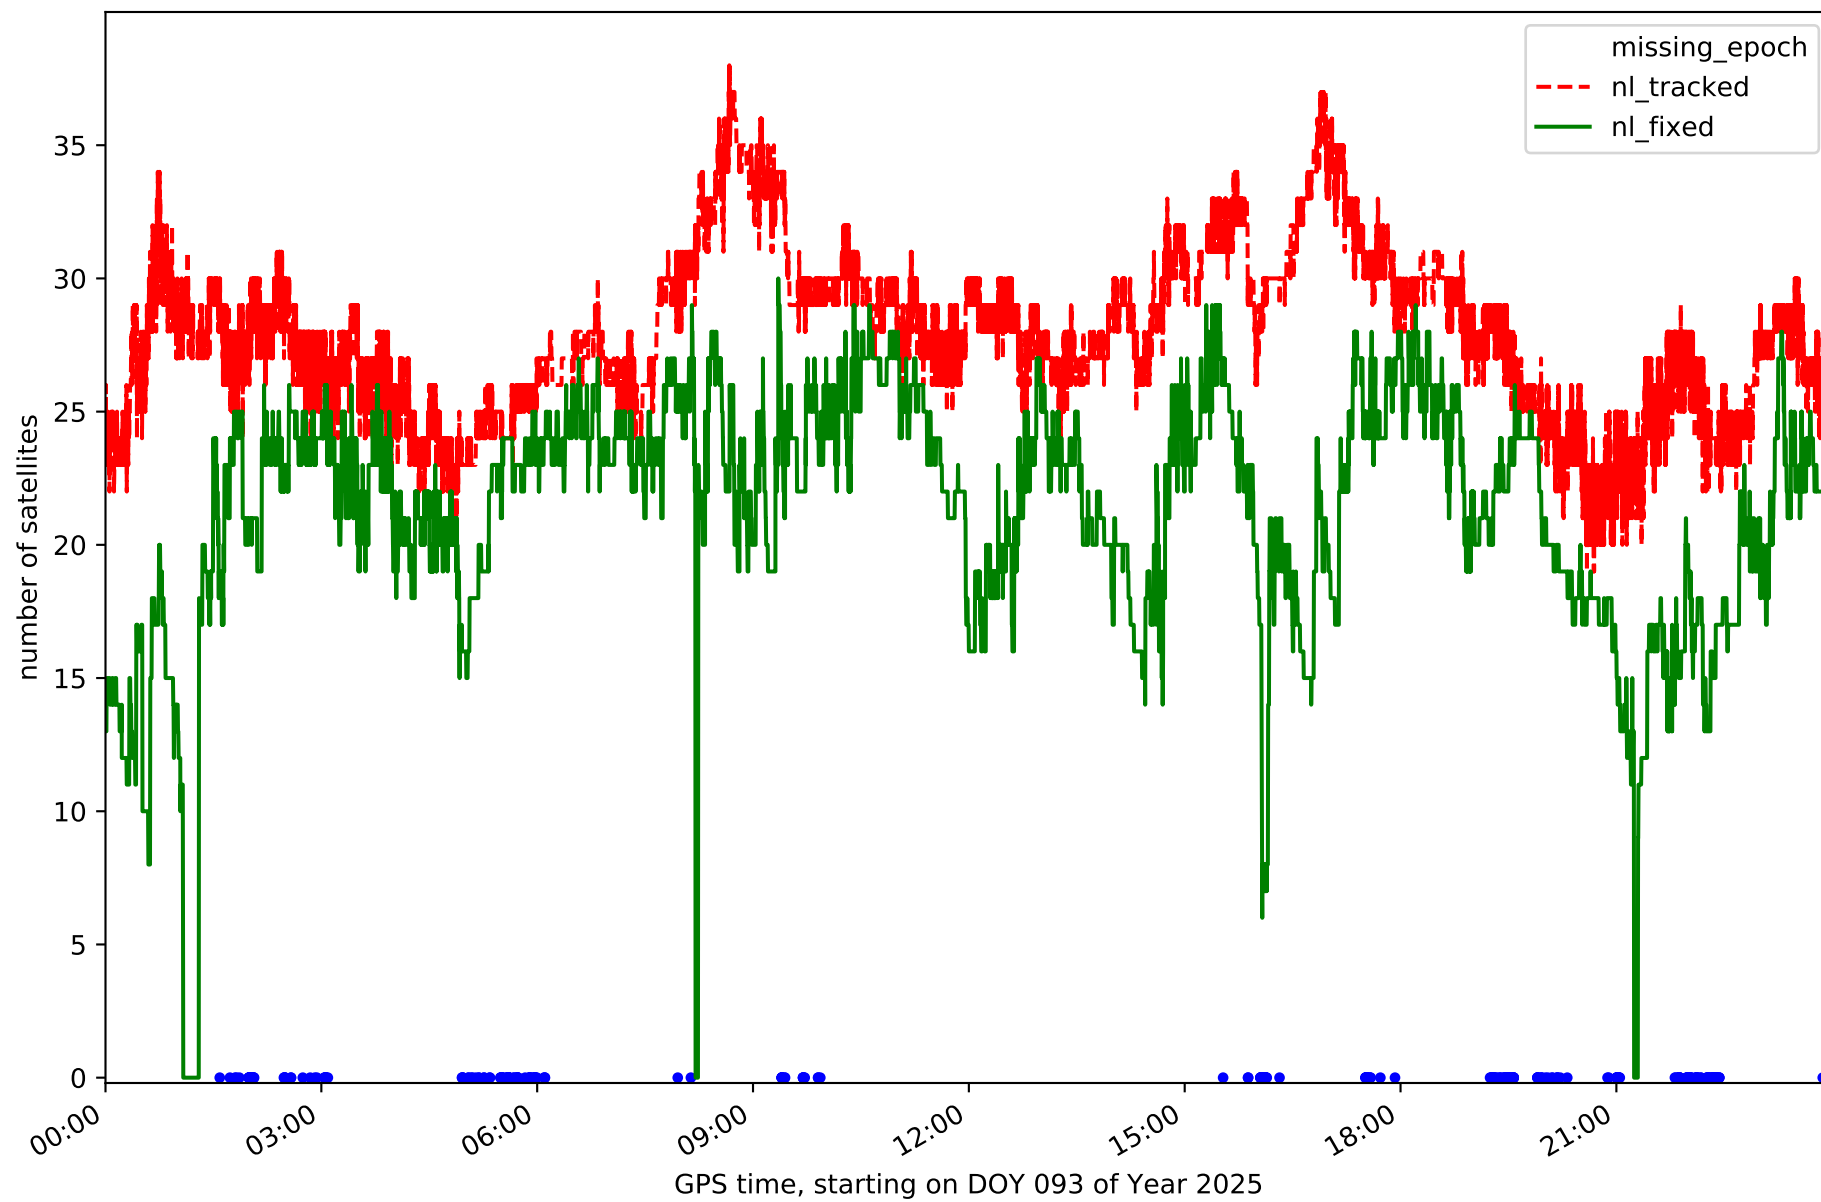


Station TN06 in network NT32

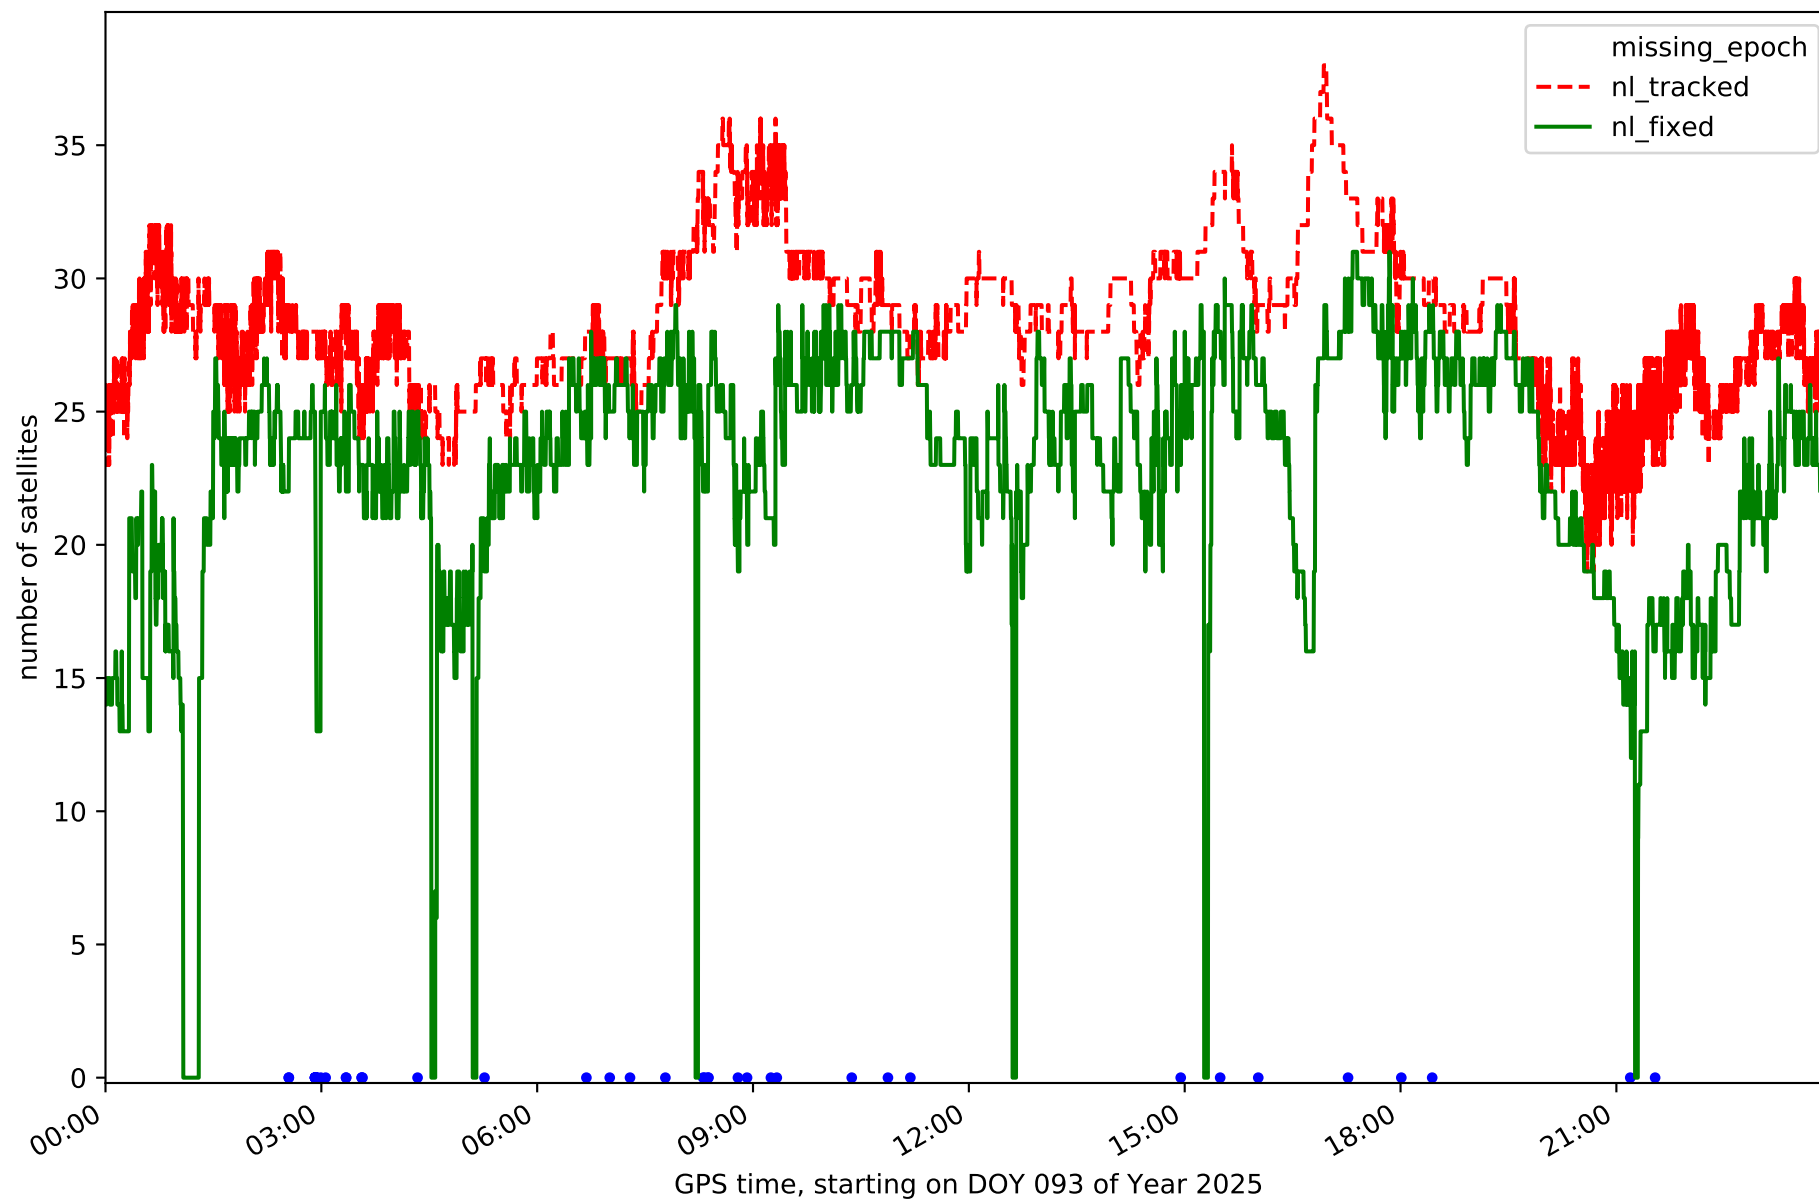


Station TN09 in network NT32

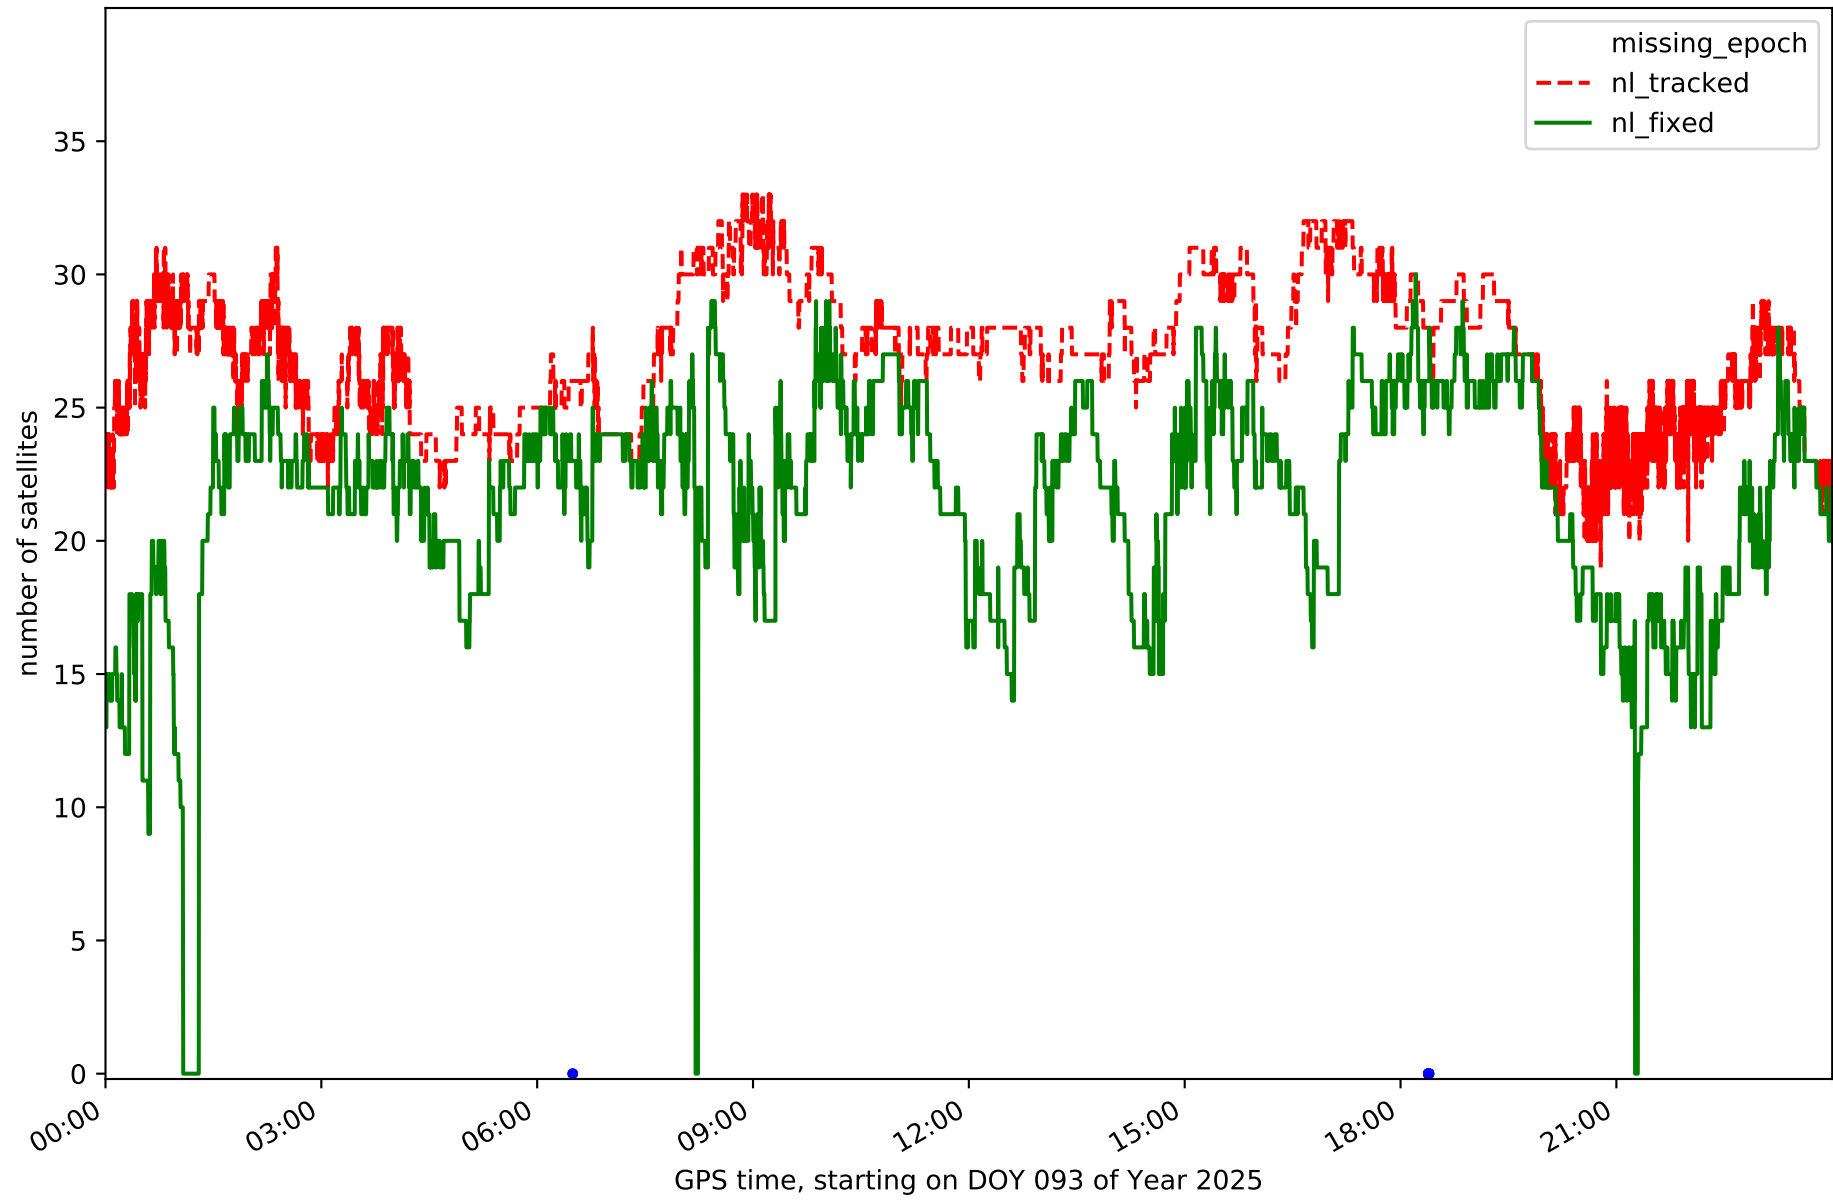


Station TE11 in network NT32

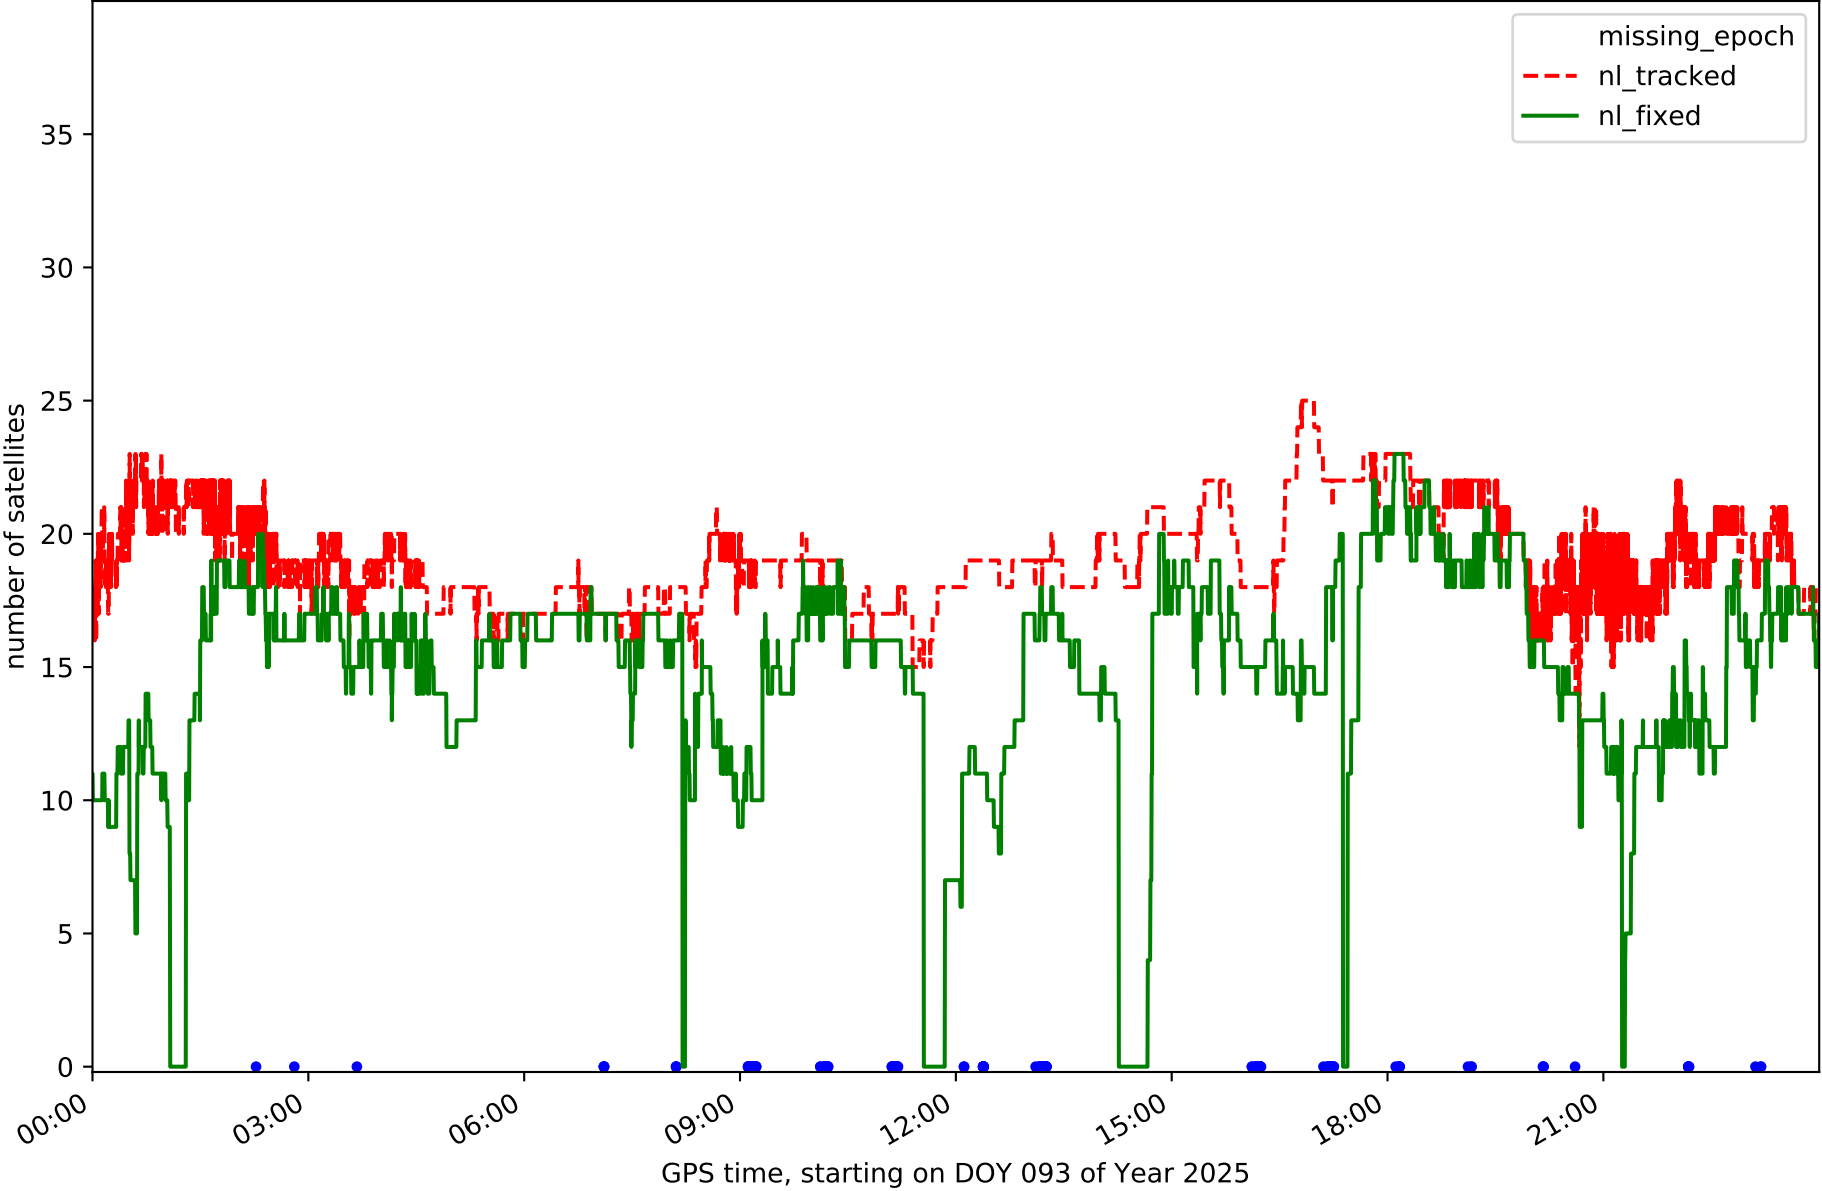


RefCheck for station EH01 in network NT32

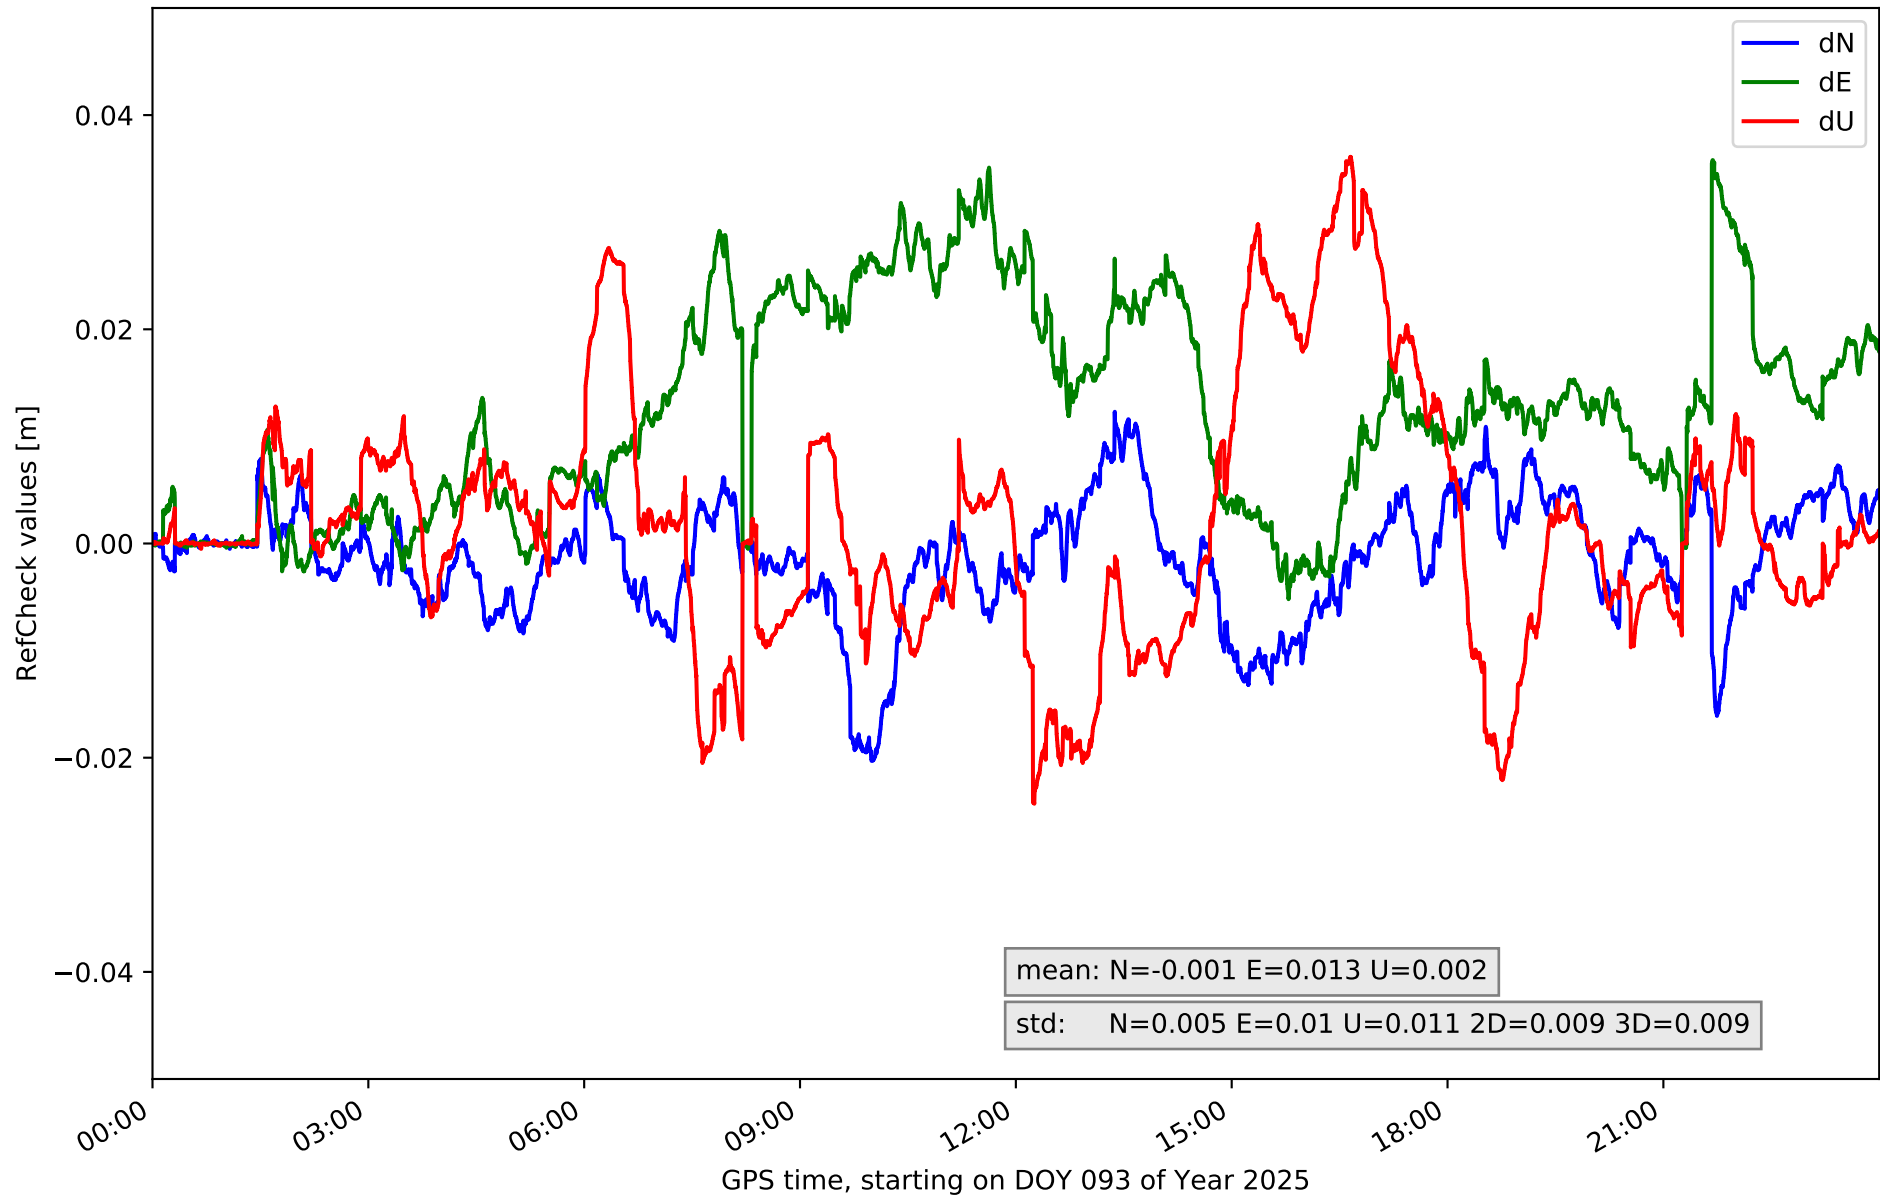


RefCheck for station EH02 in network NT32

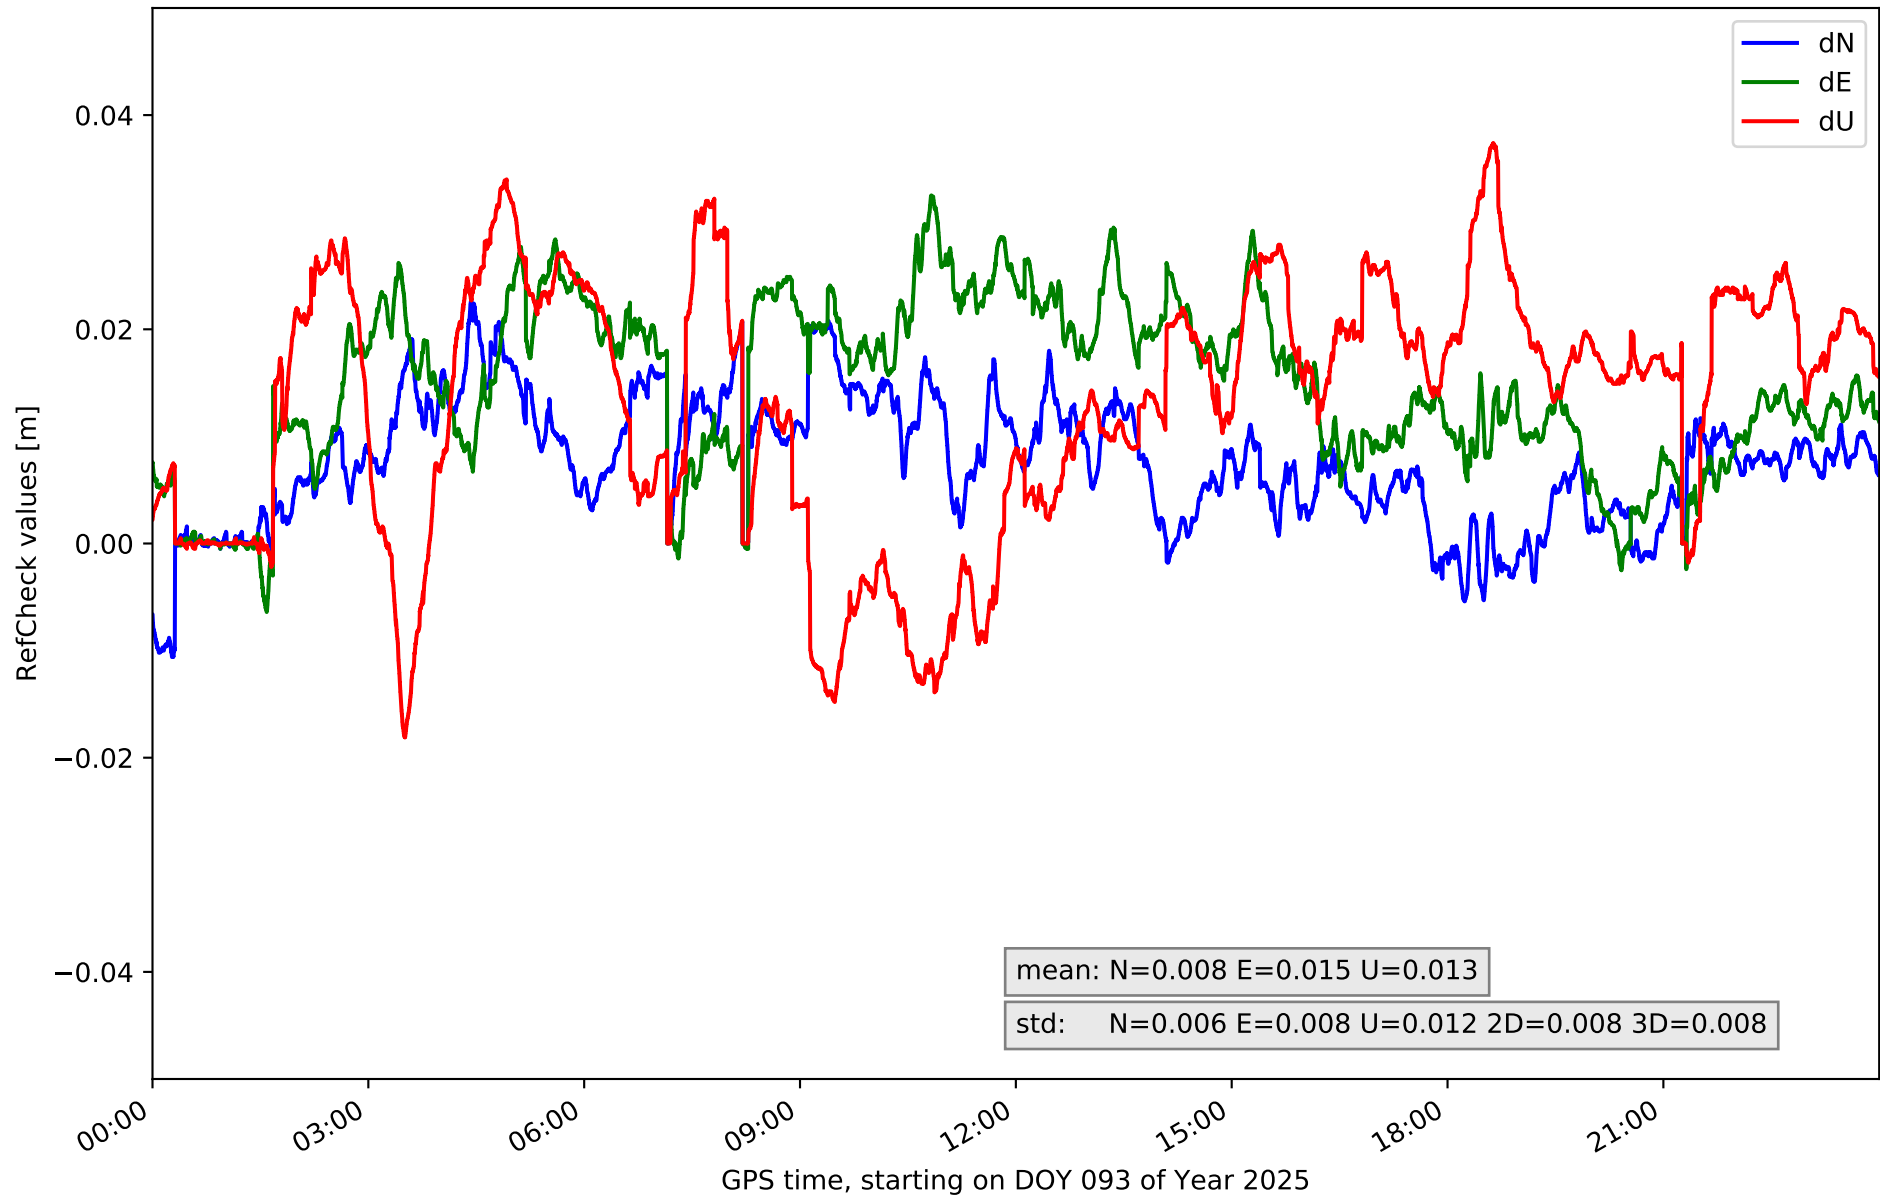


RefCheck for station GOM1 in network NT32

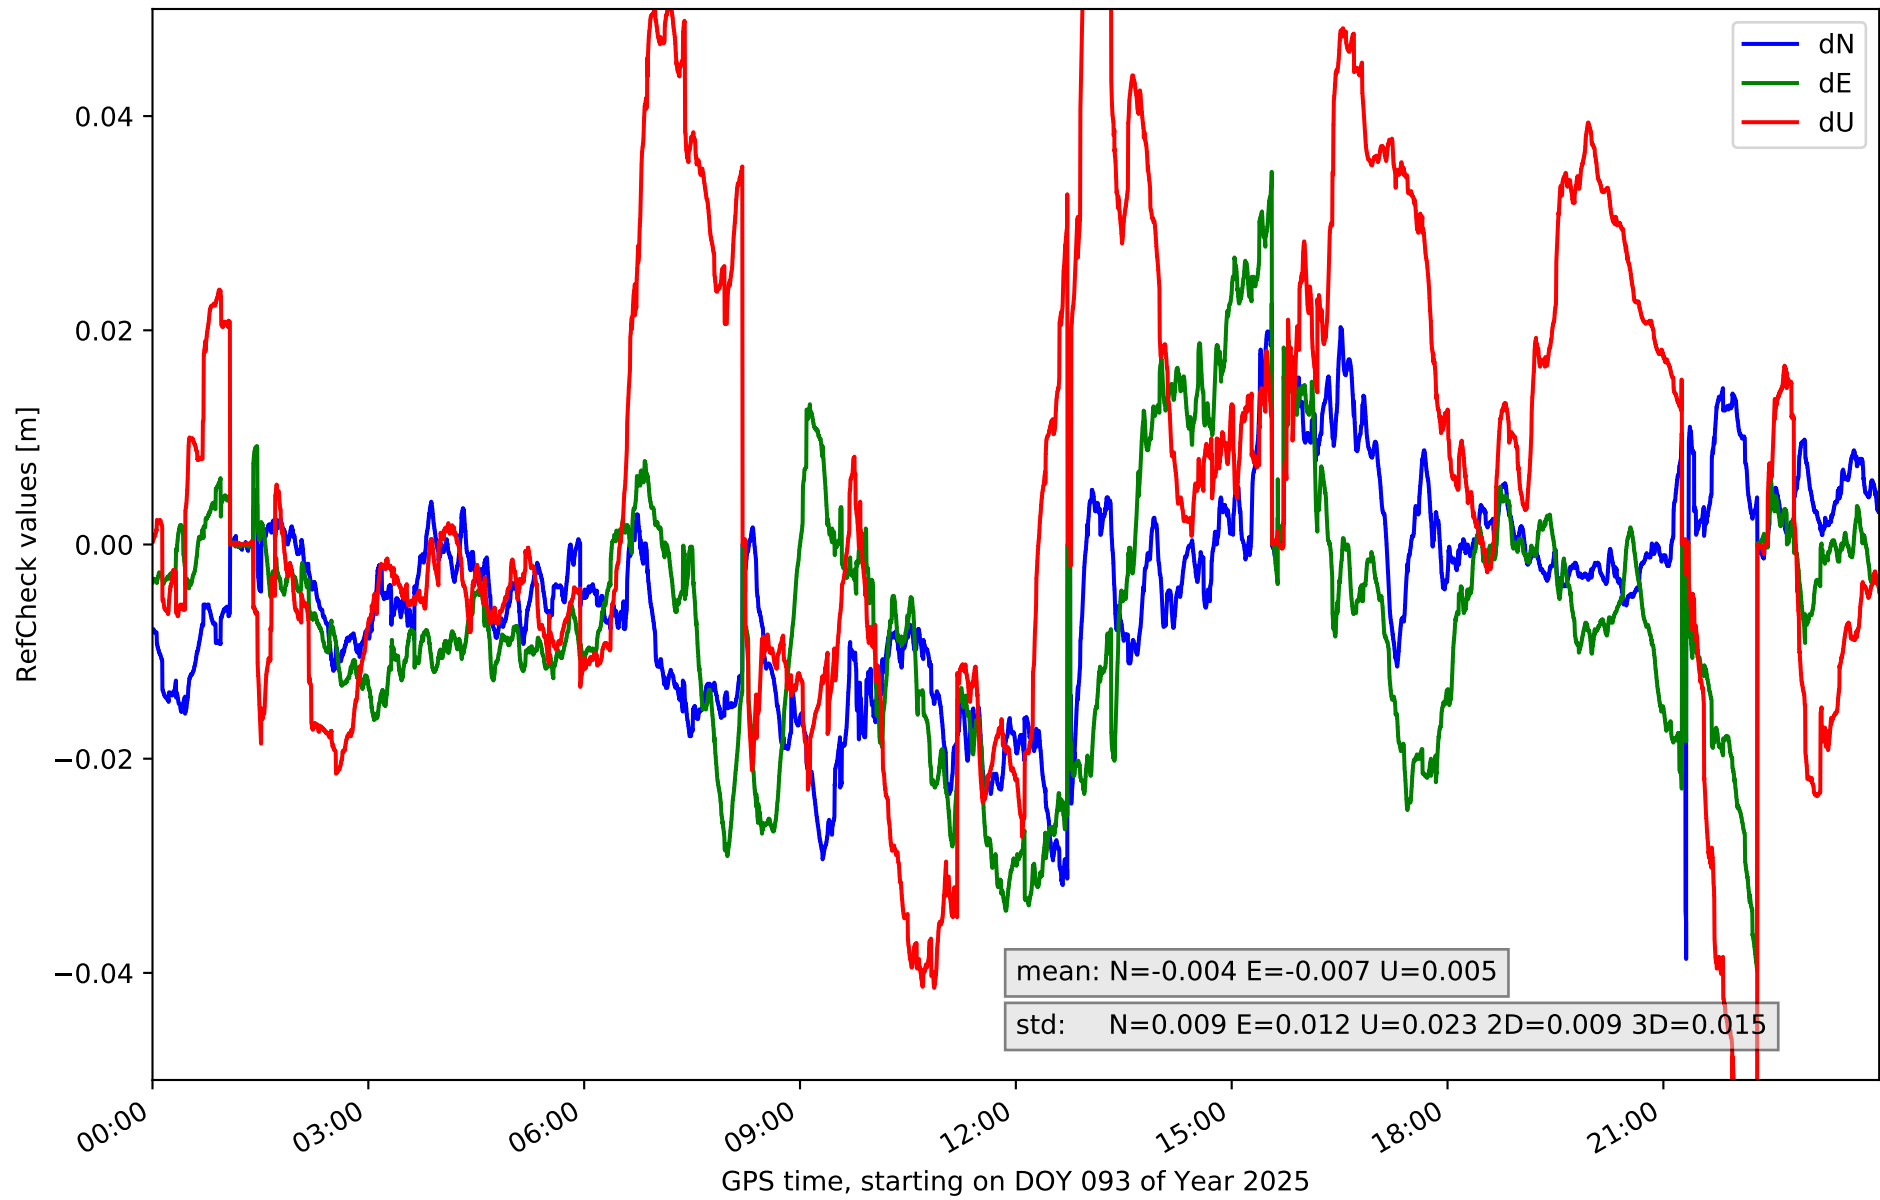


RefCheck for station IZAN in network NT32

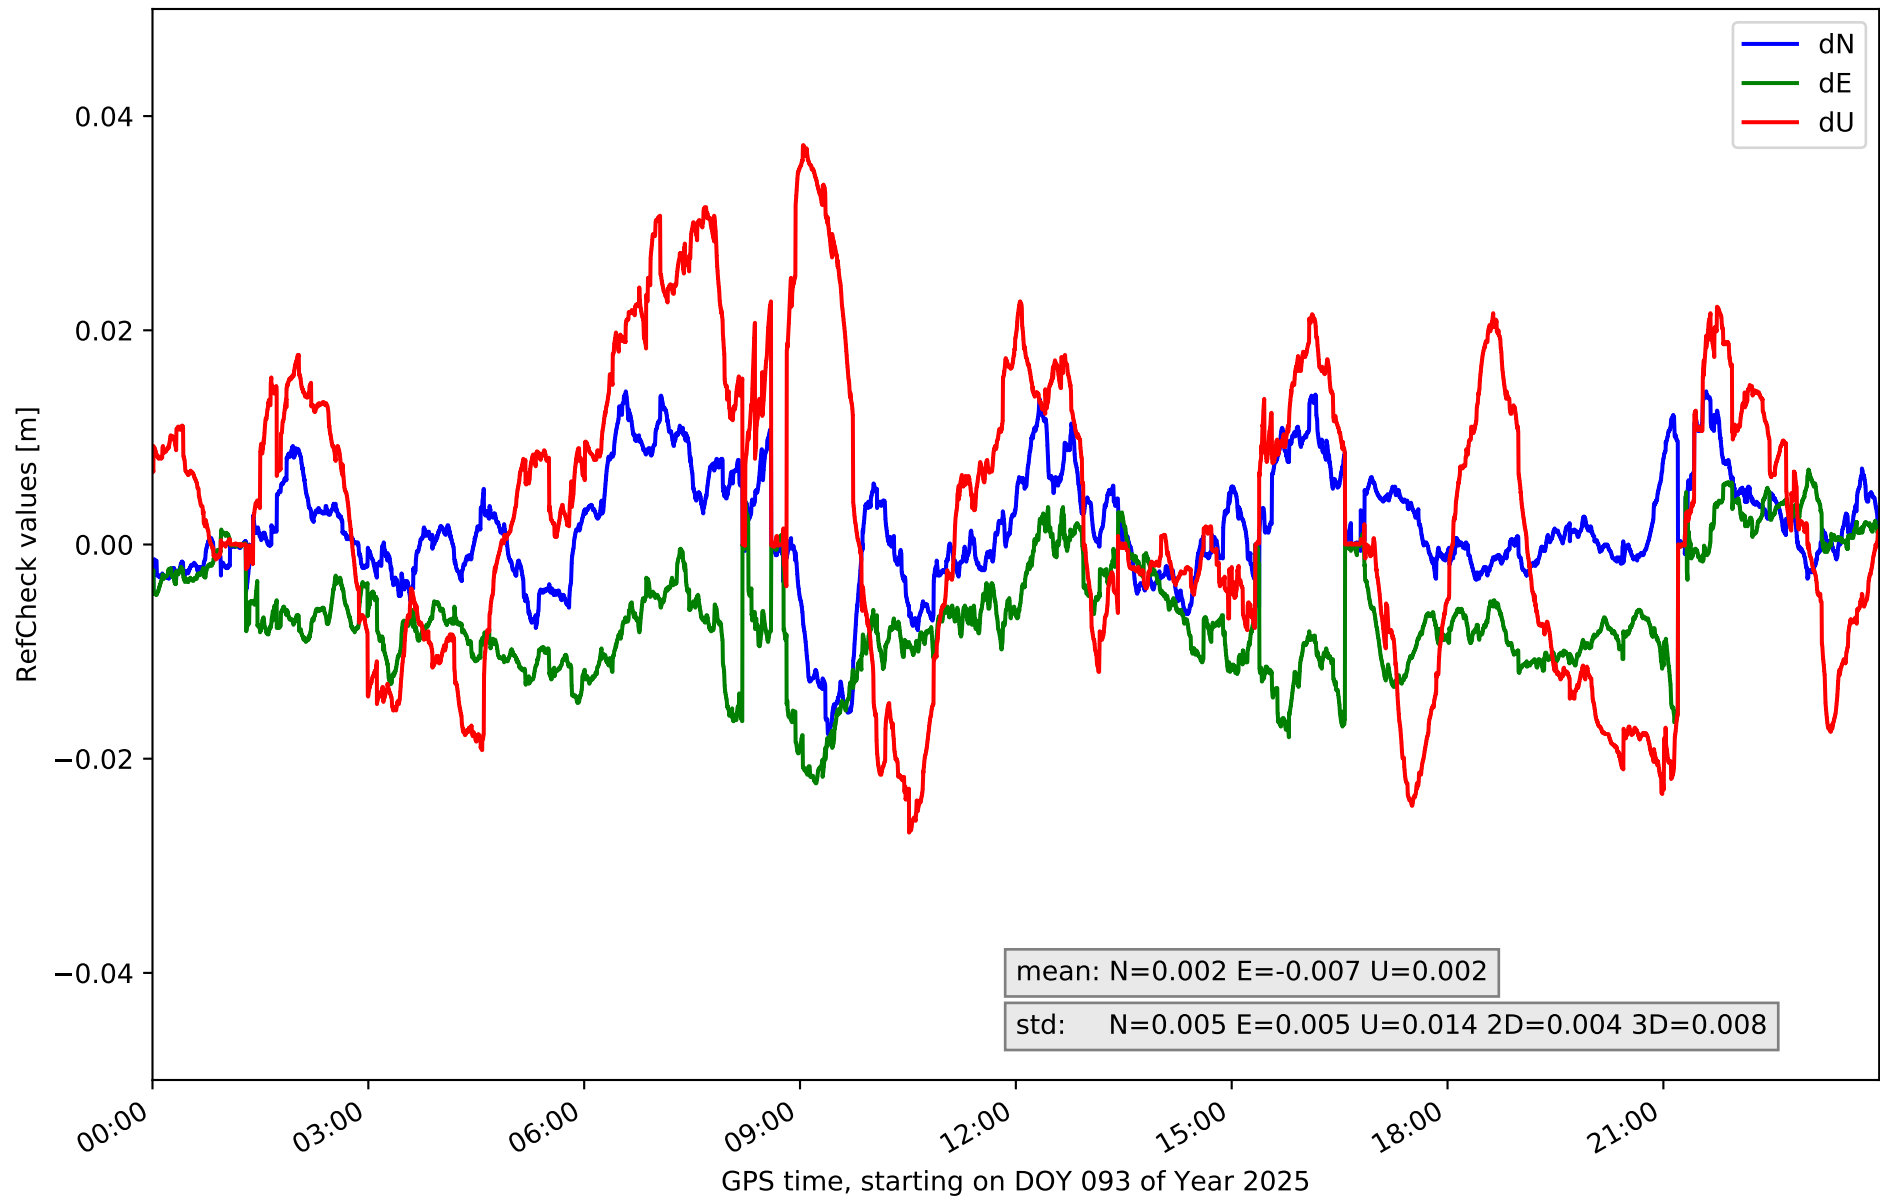


RefCheck for station LP01 in network NT32

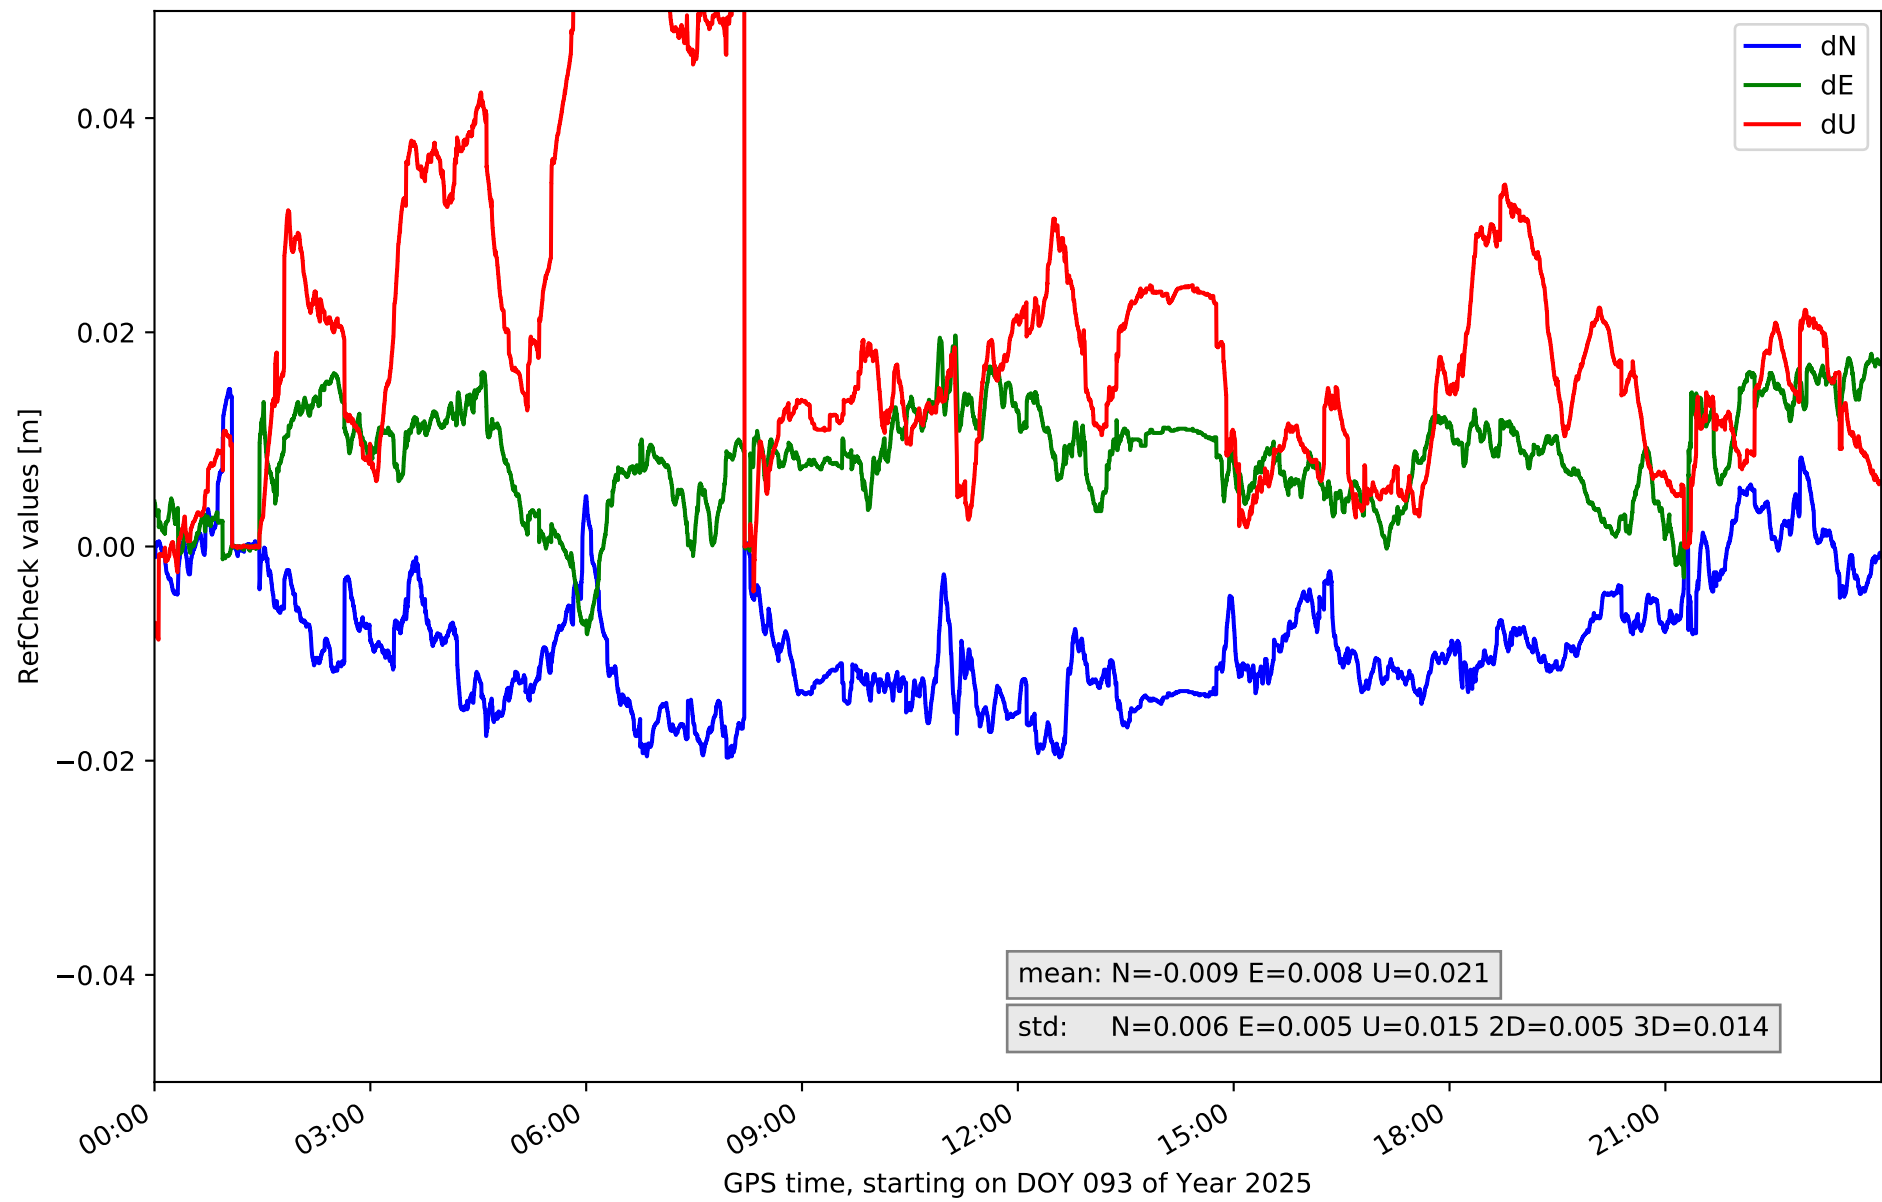


RefCheck for station LP03 in network NT32

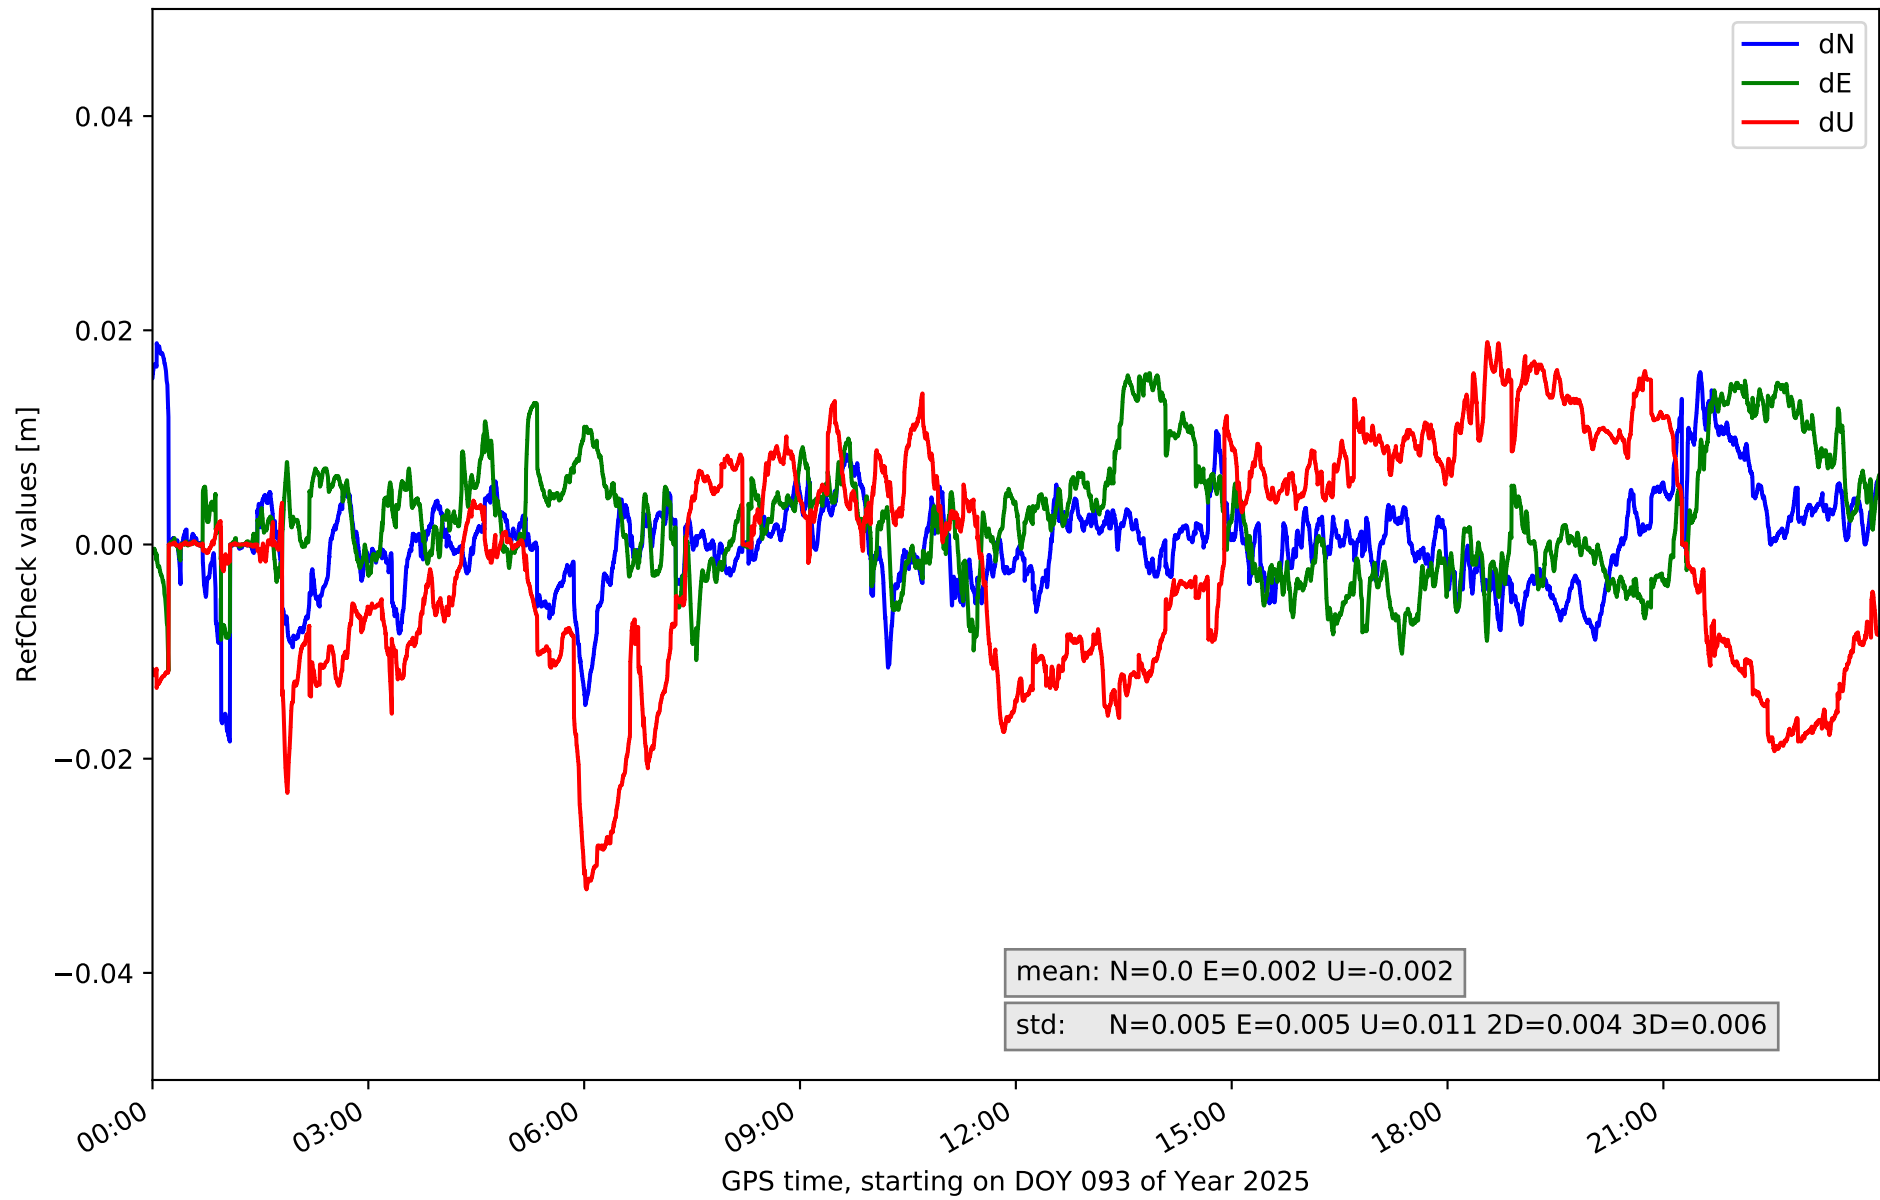


RefCheck for station LPAL in network NT32

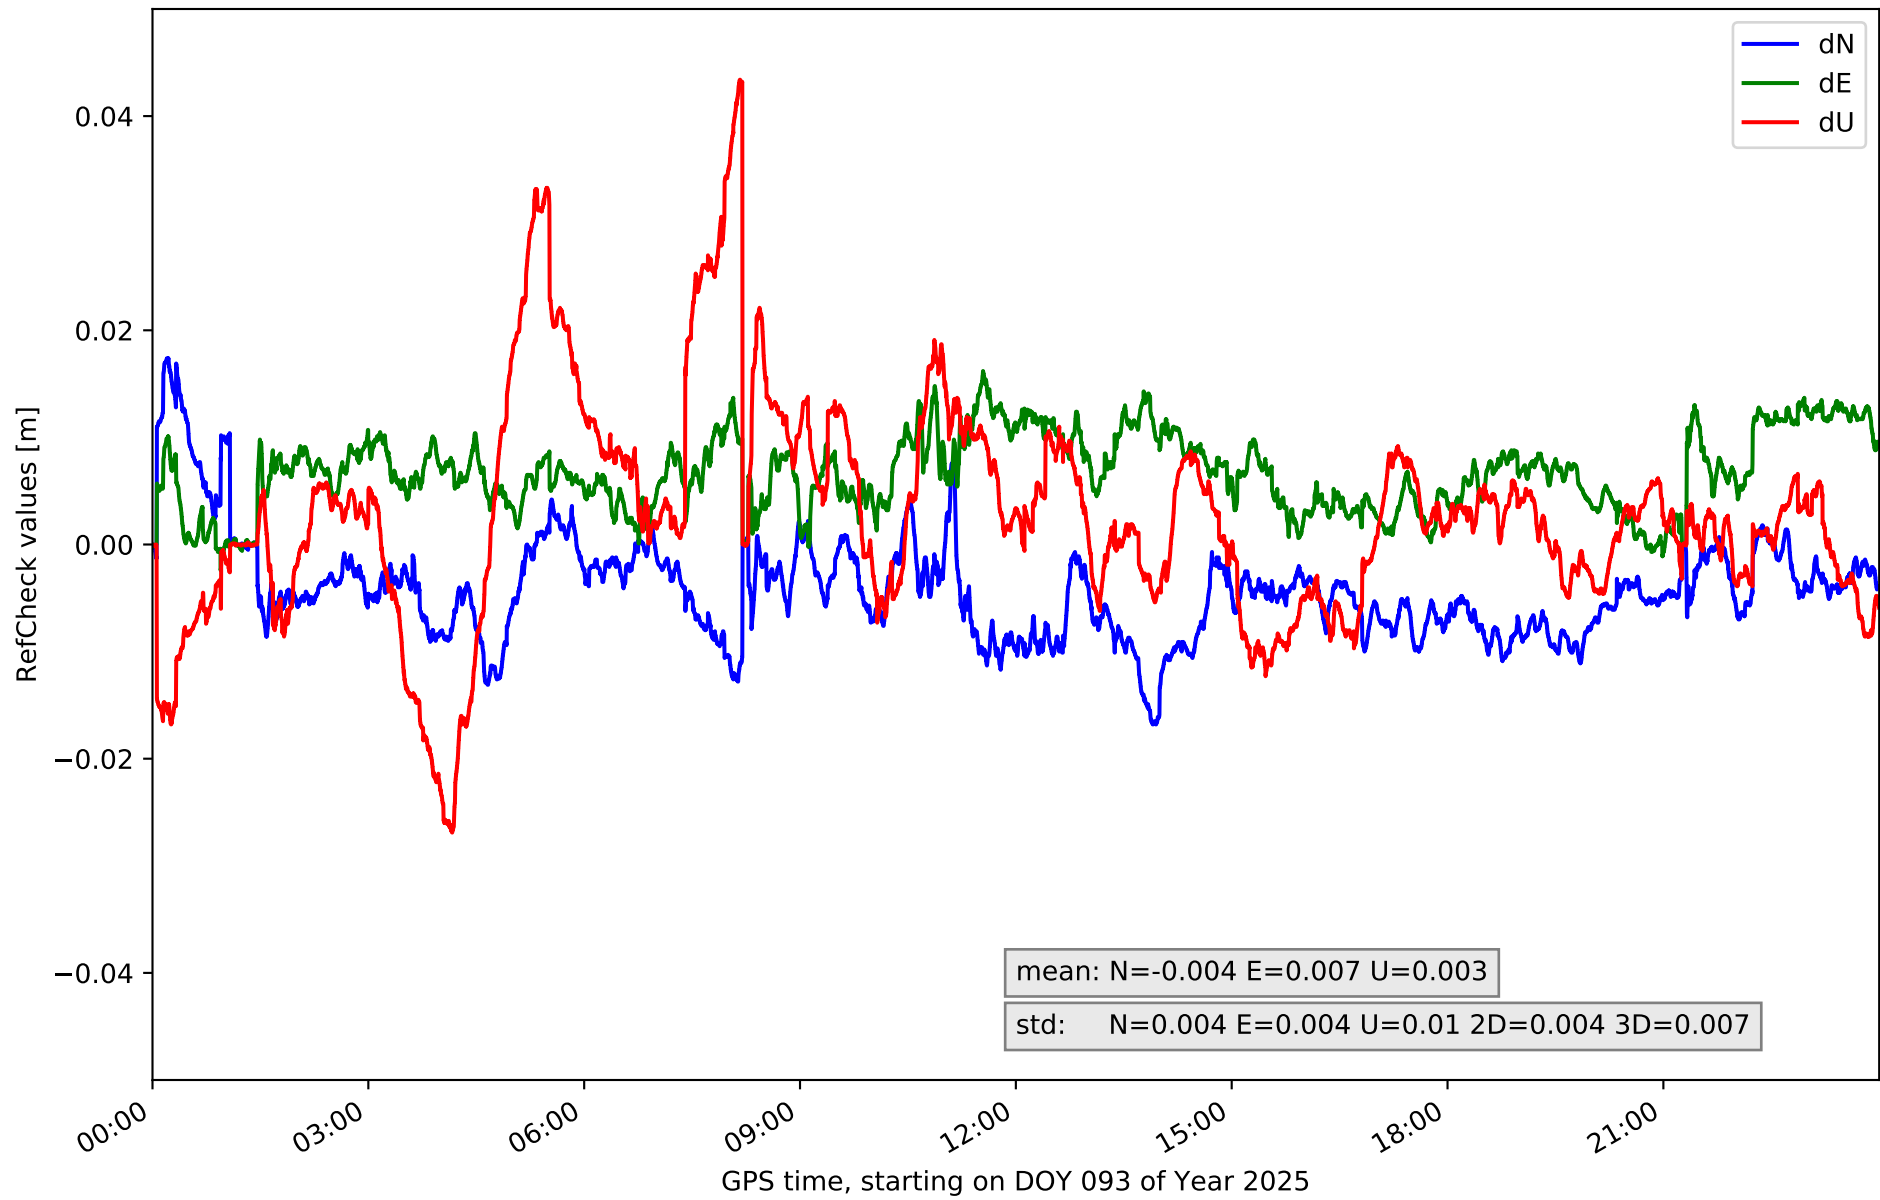


RefCheck for station LRES in network NT32

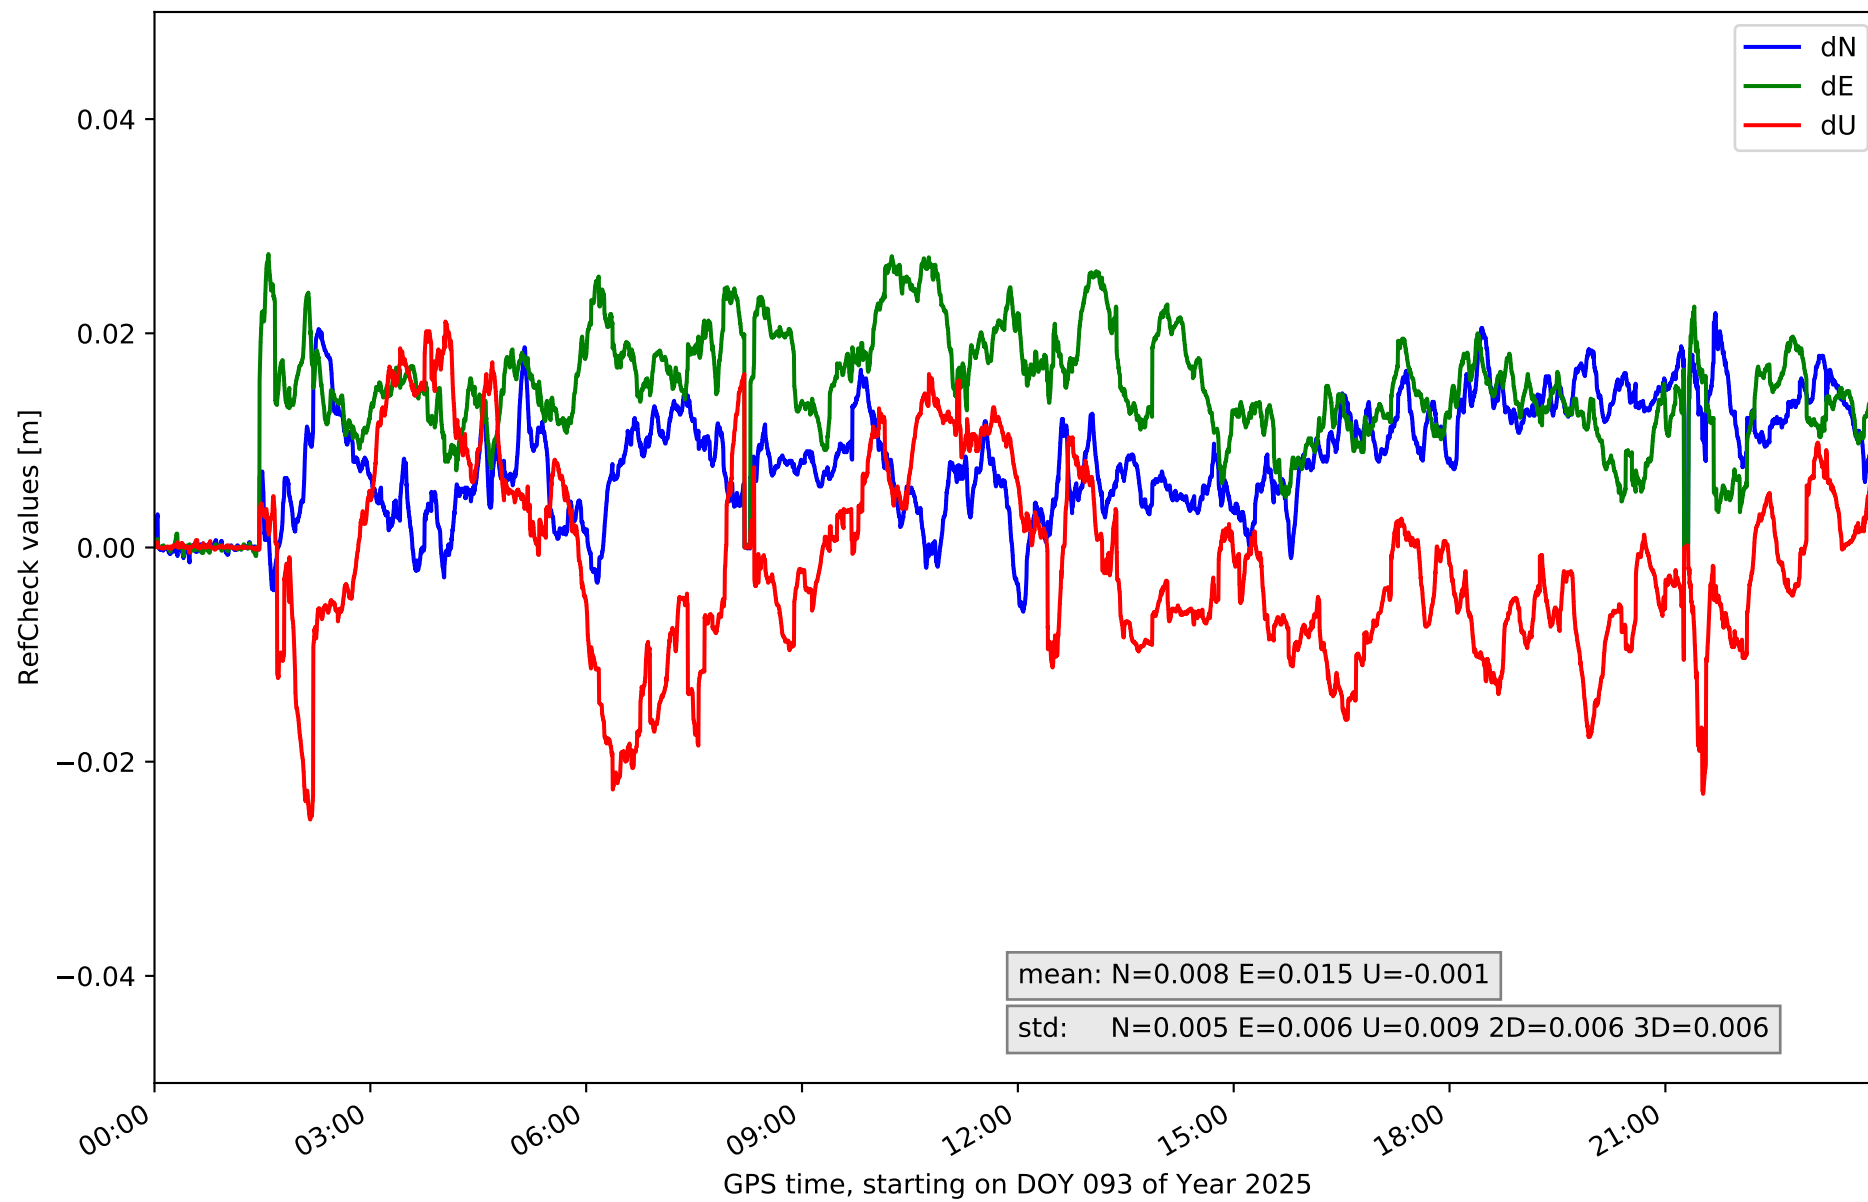


RefCheck for station TN01 in network NT32

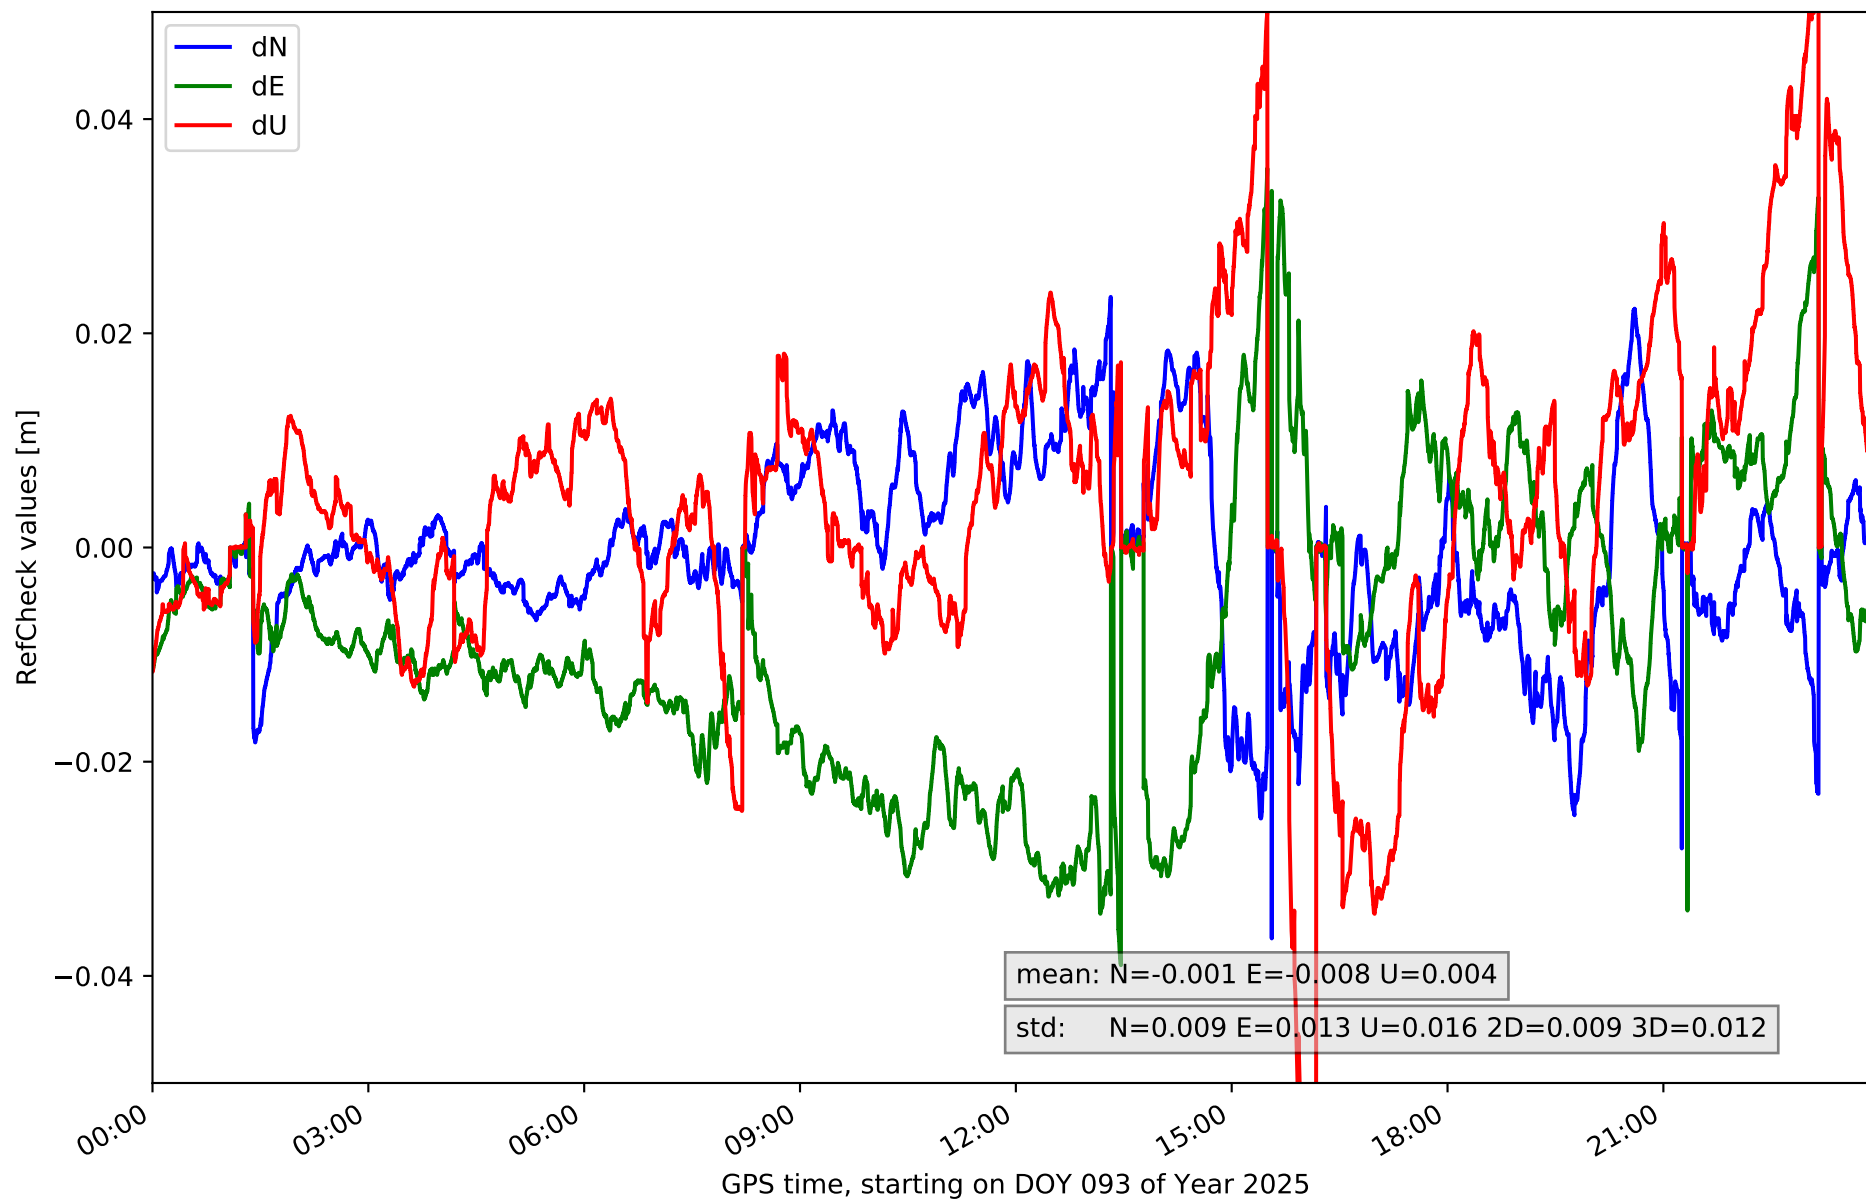


RefCheck for station TN02 in network NT32

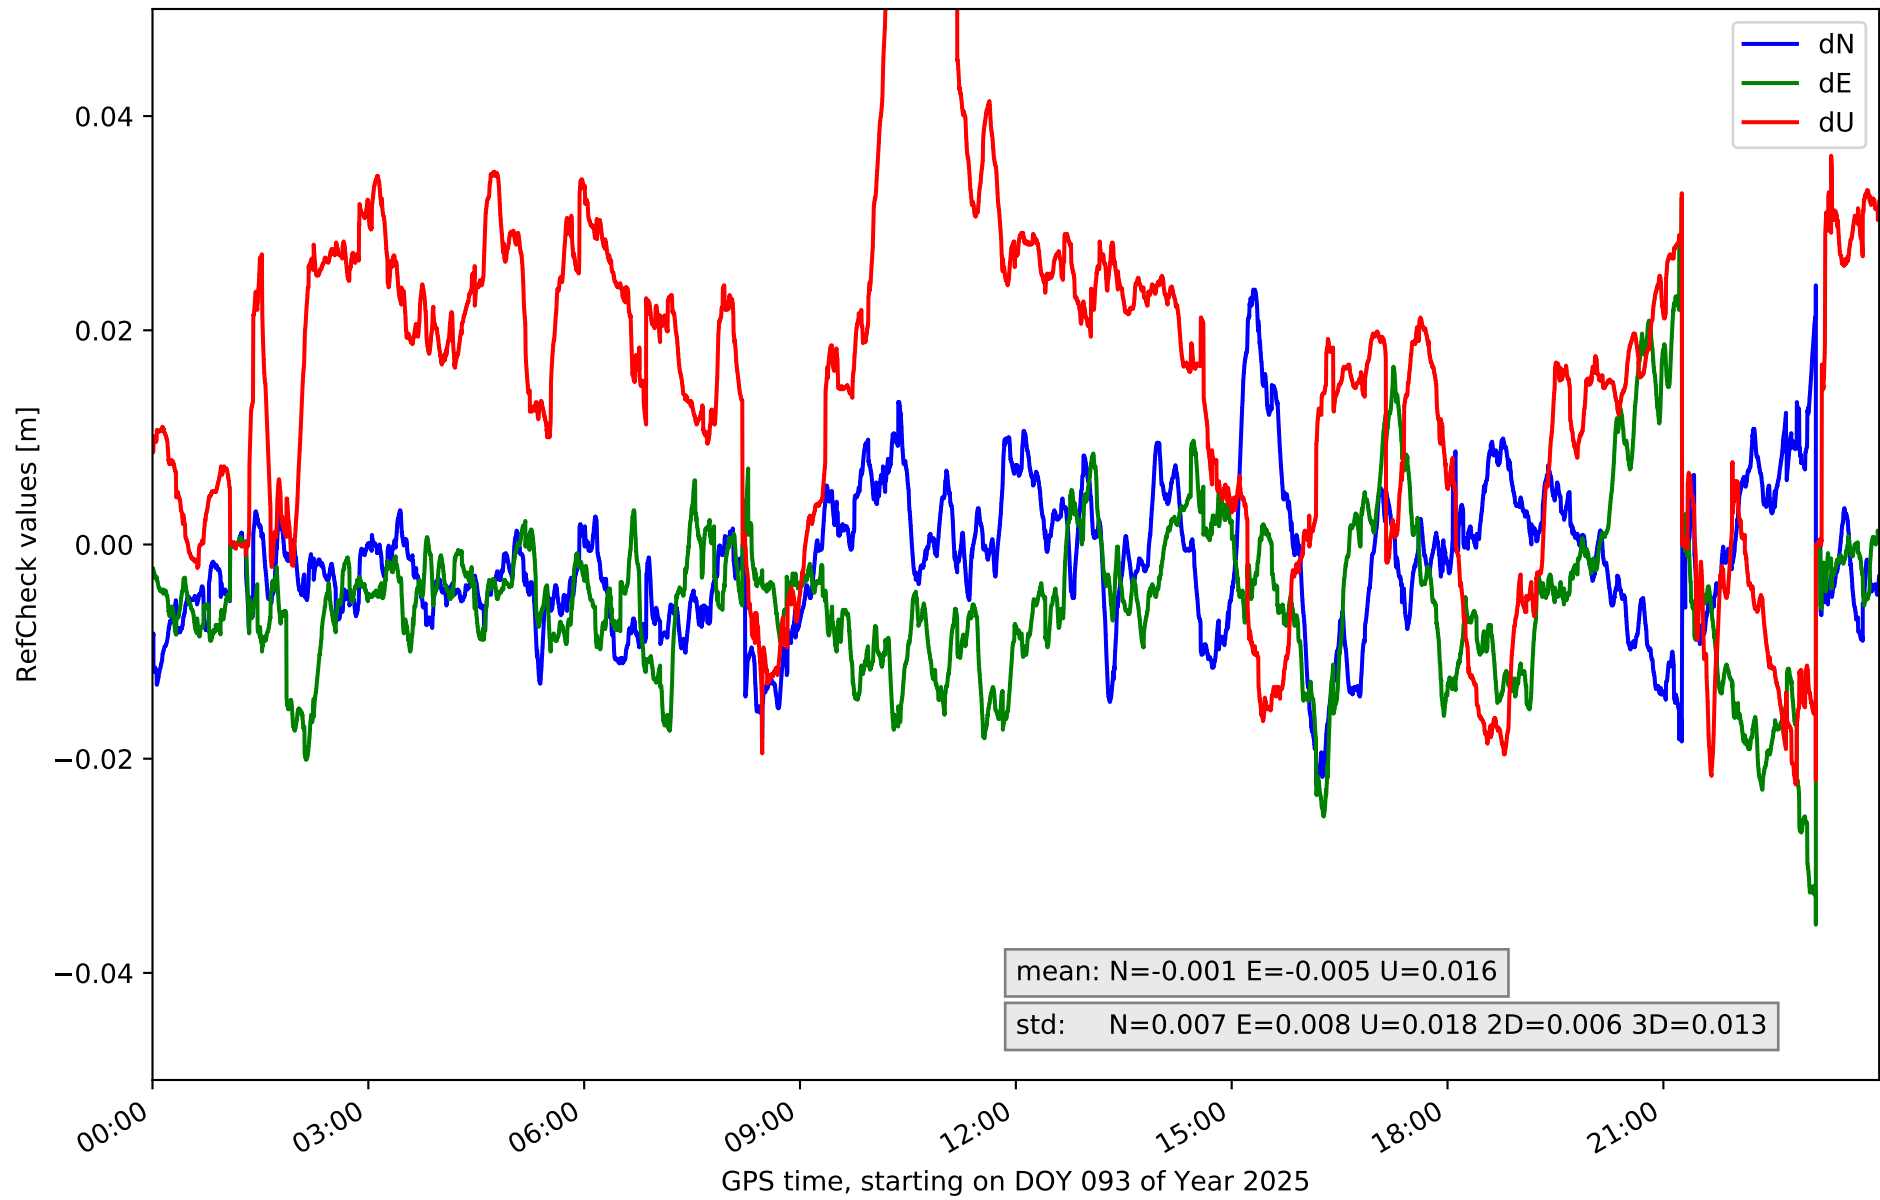


RefCheck for station TN03 in network NT32

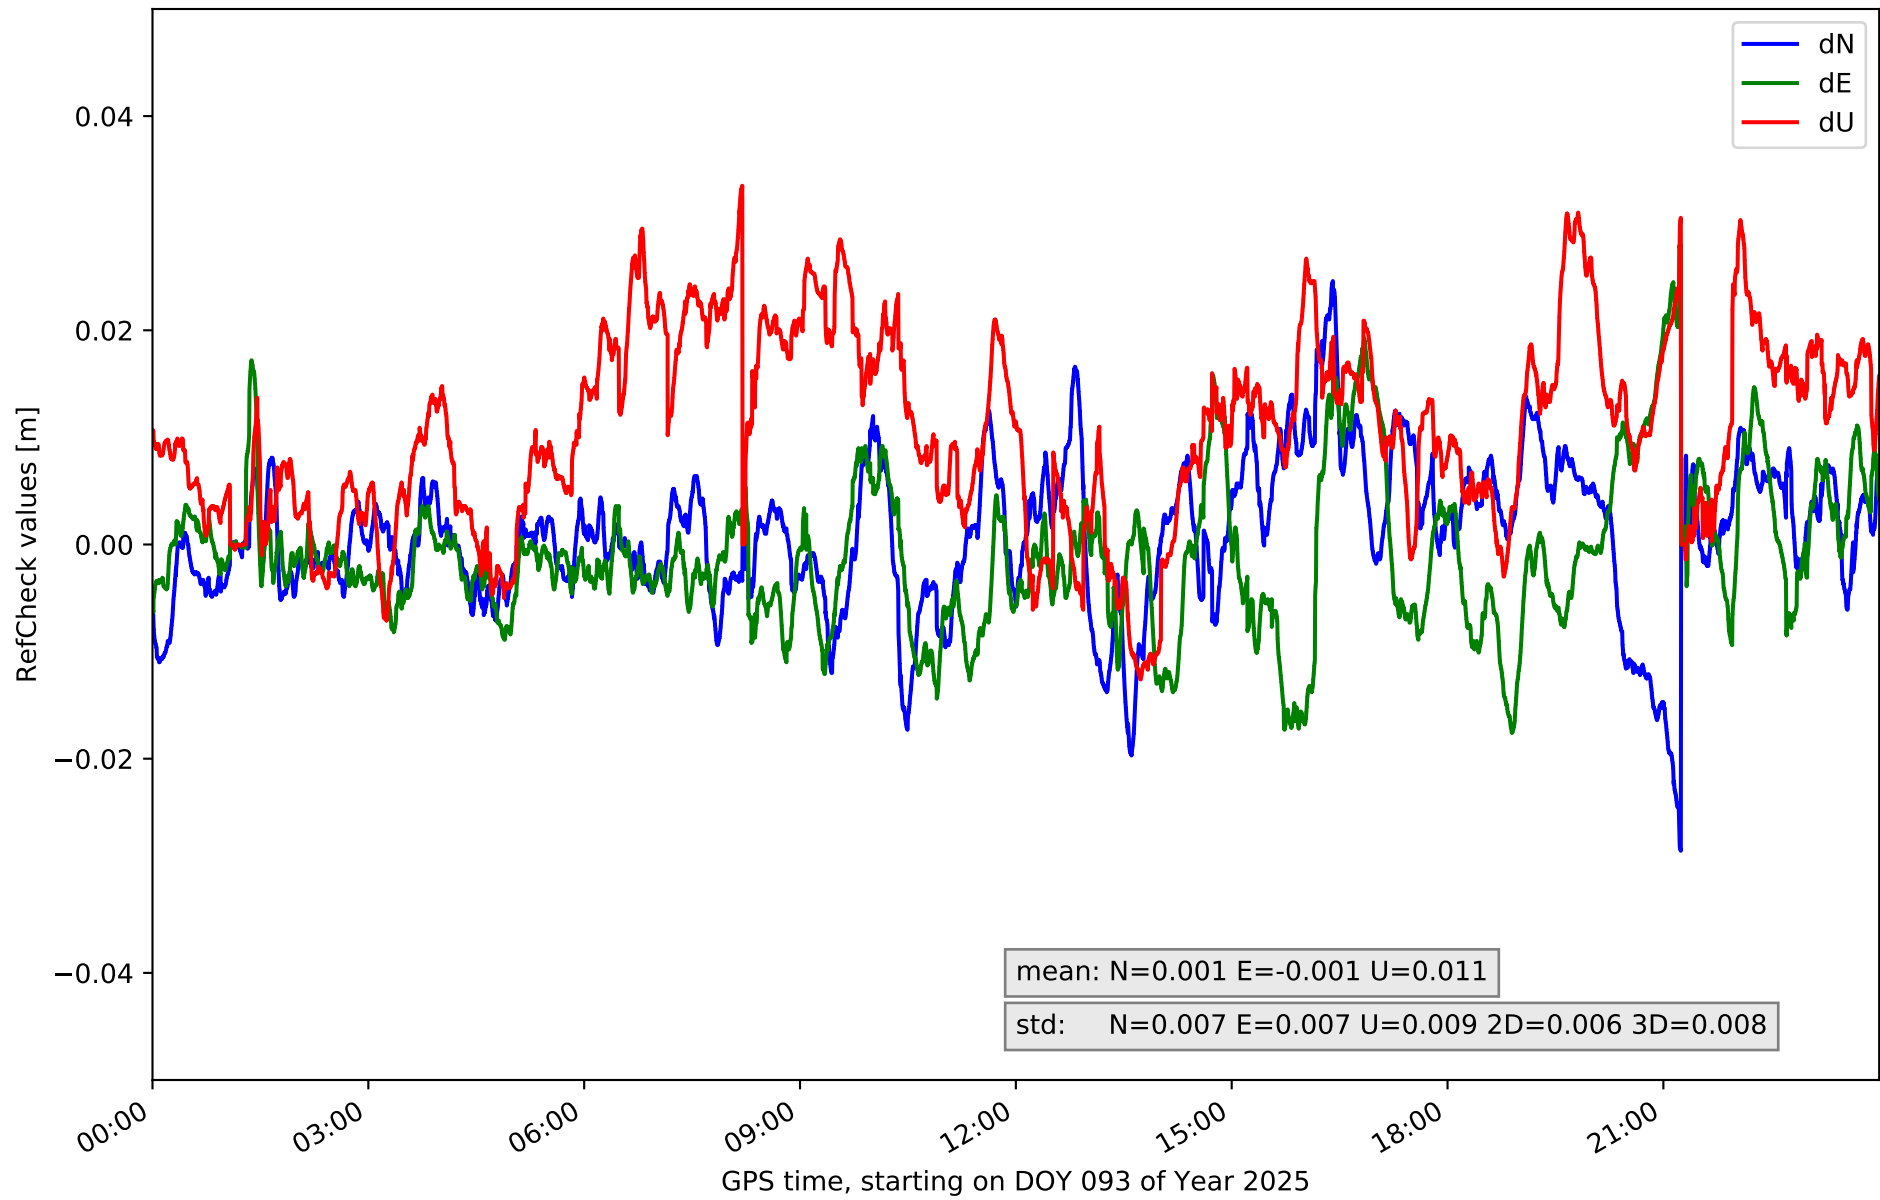


RefCheck for station TN06 in network NT32

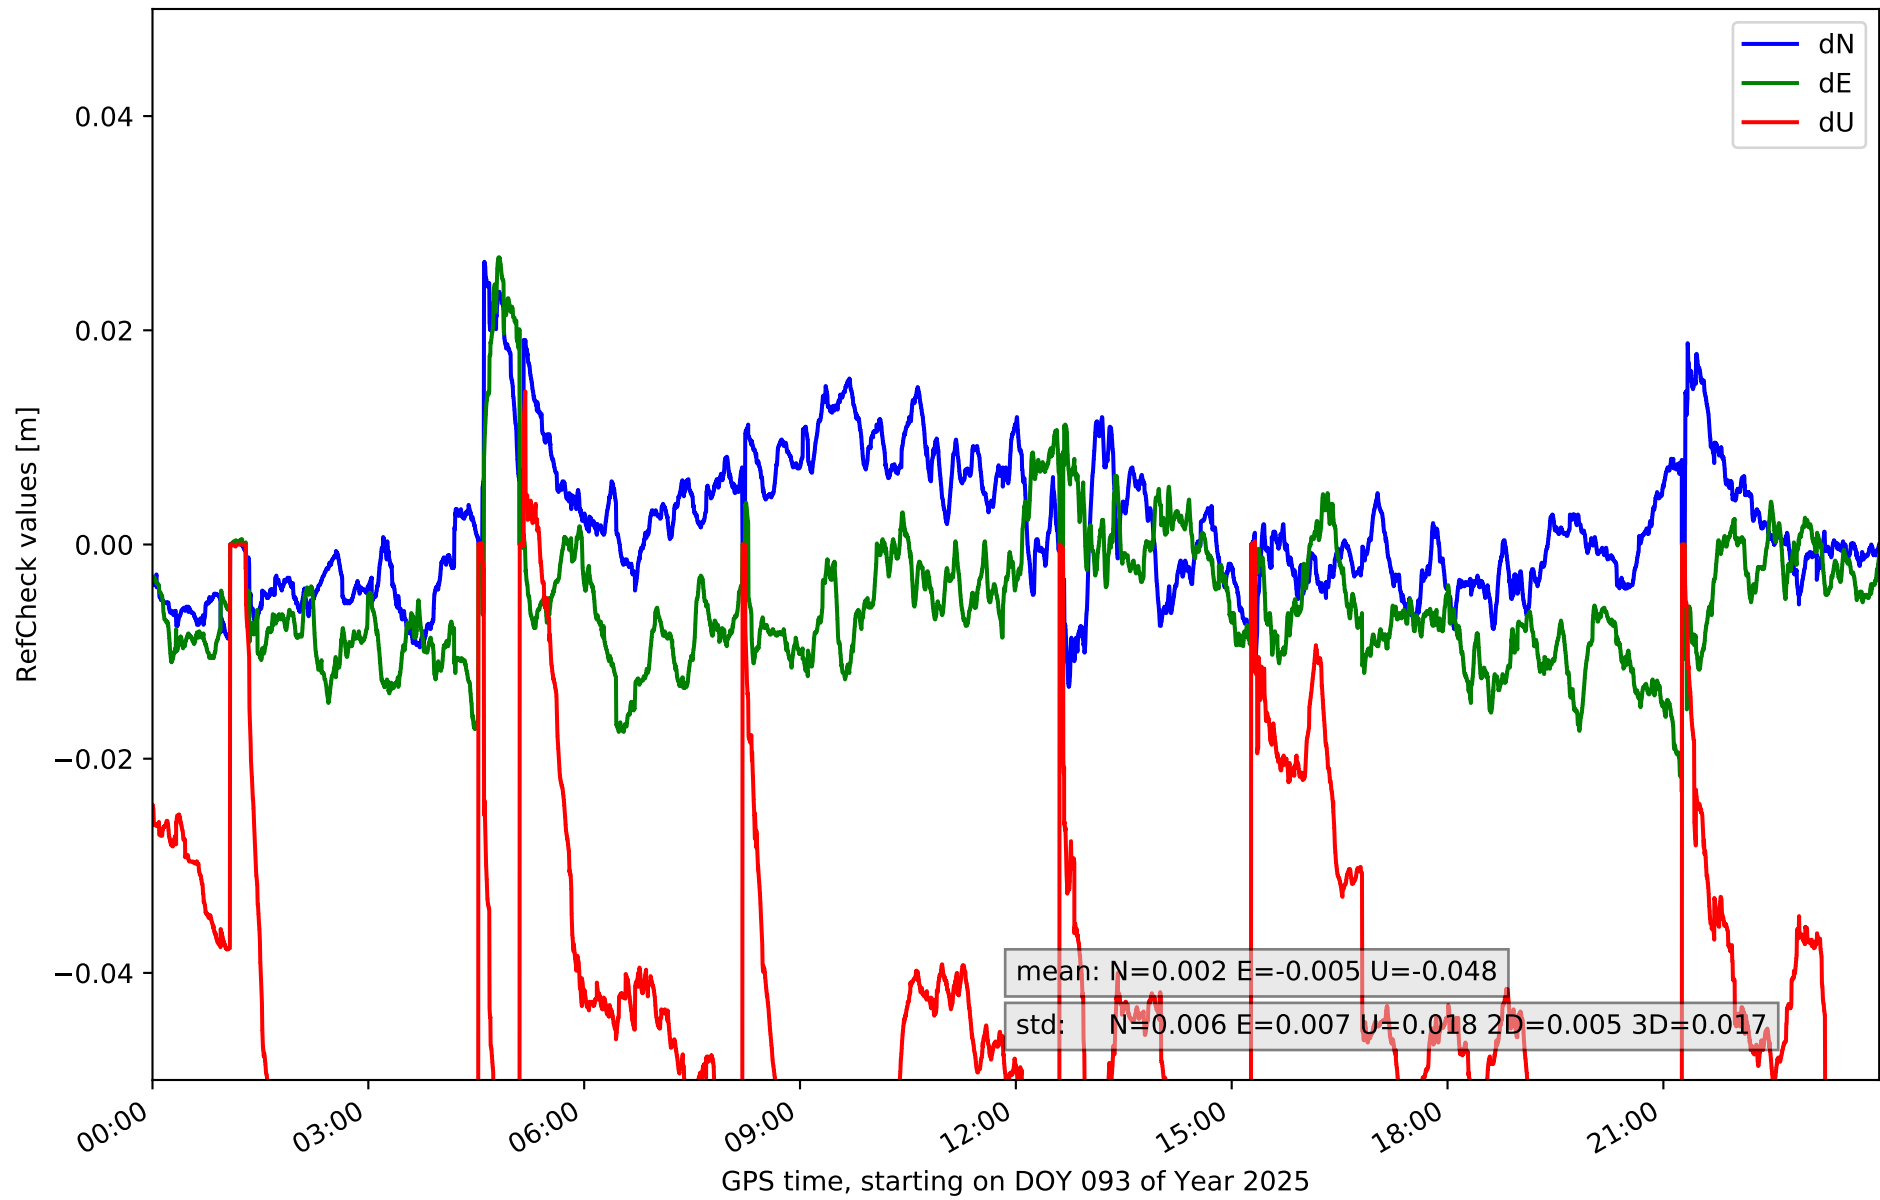

RefCheck for station TN09 in network NT32

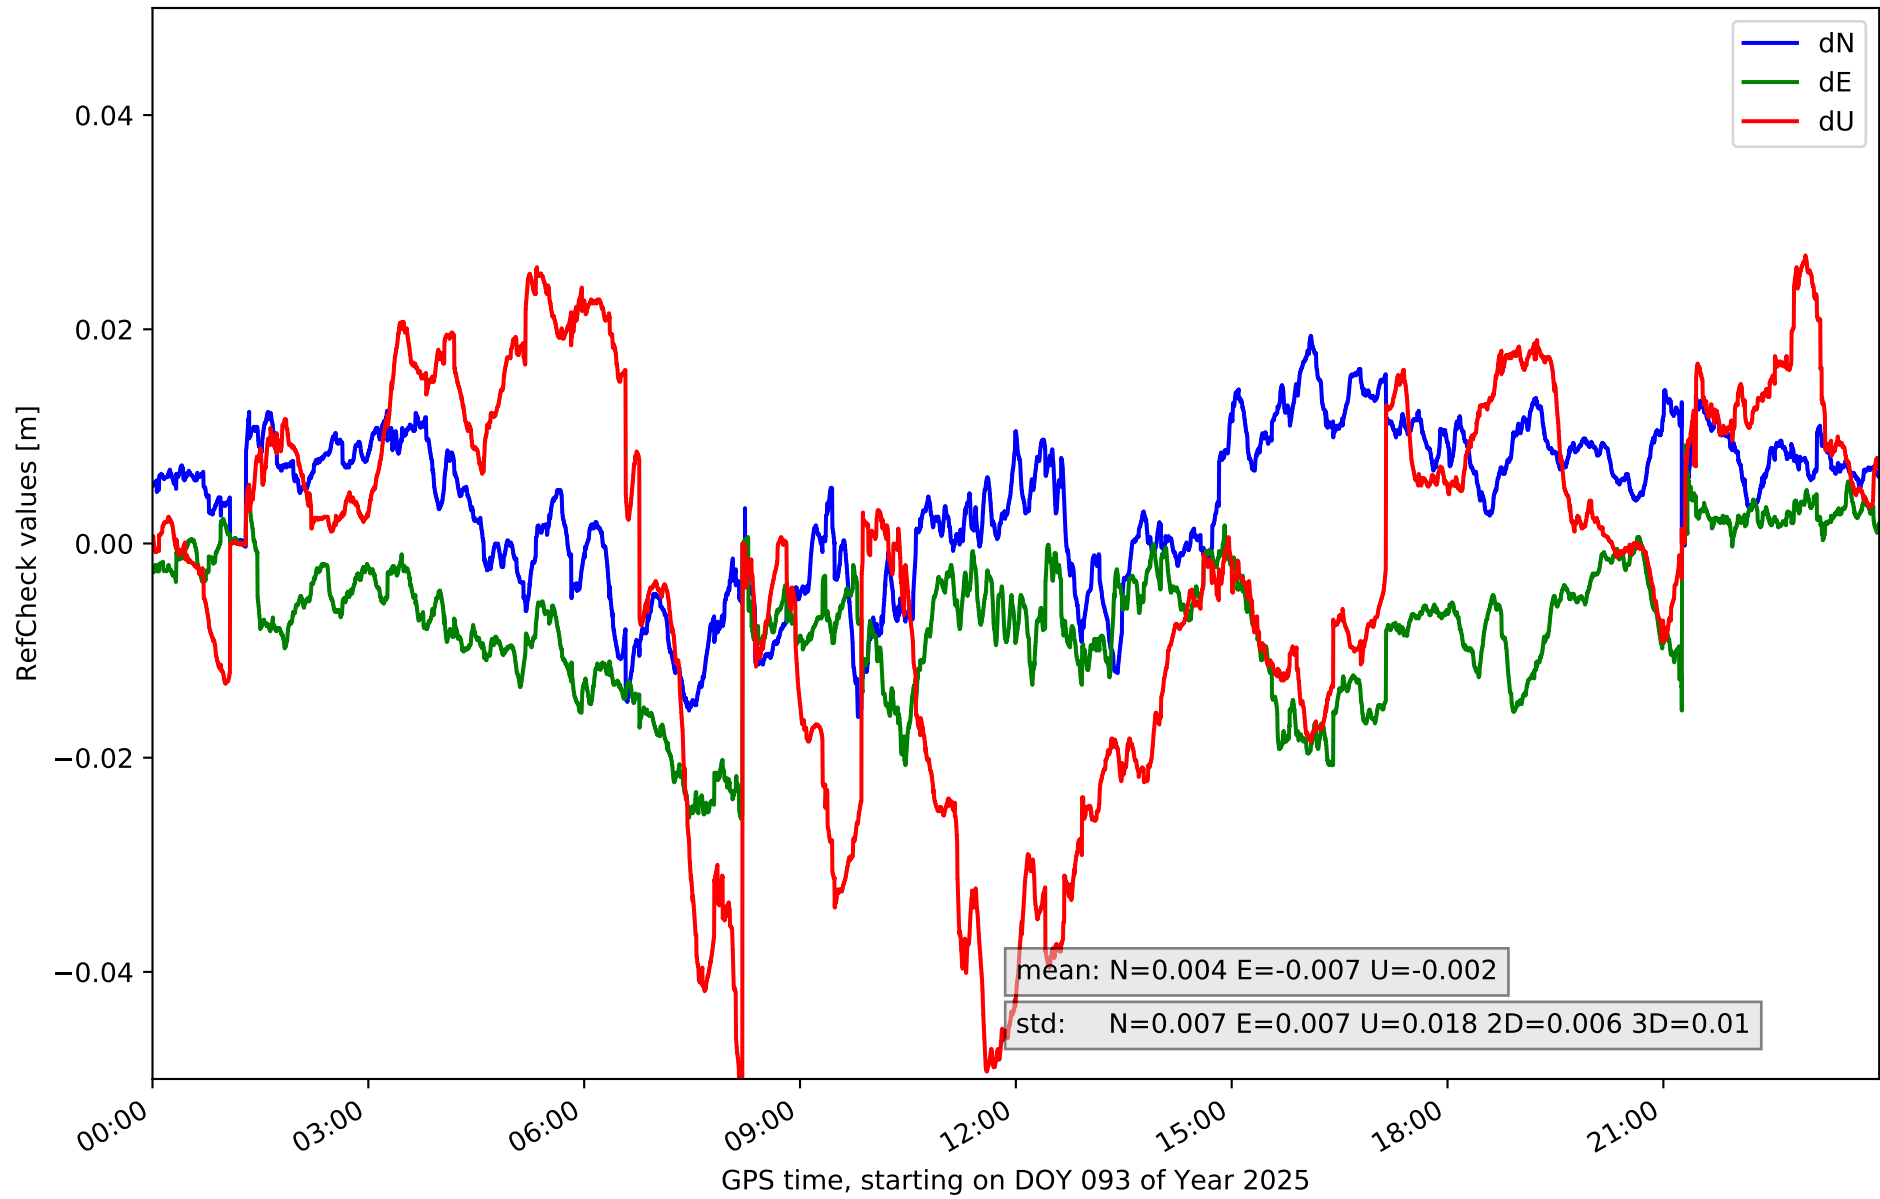

RefCheck for station TE11 in network NT32

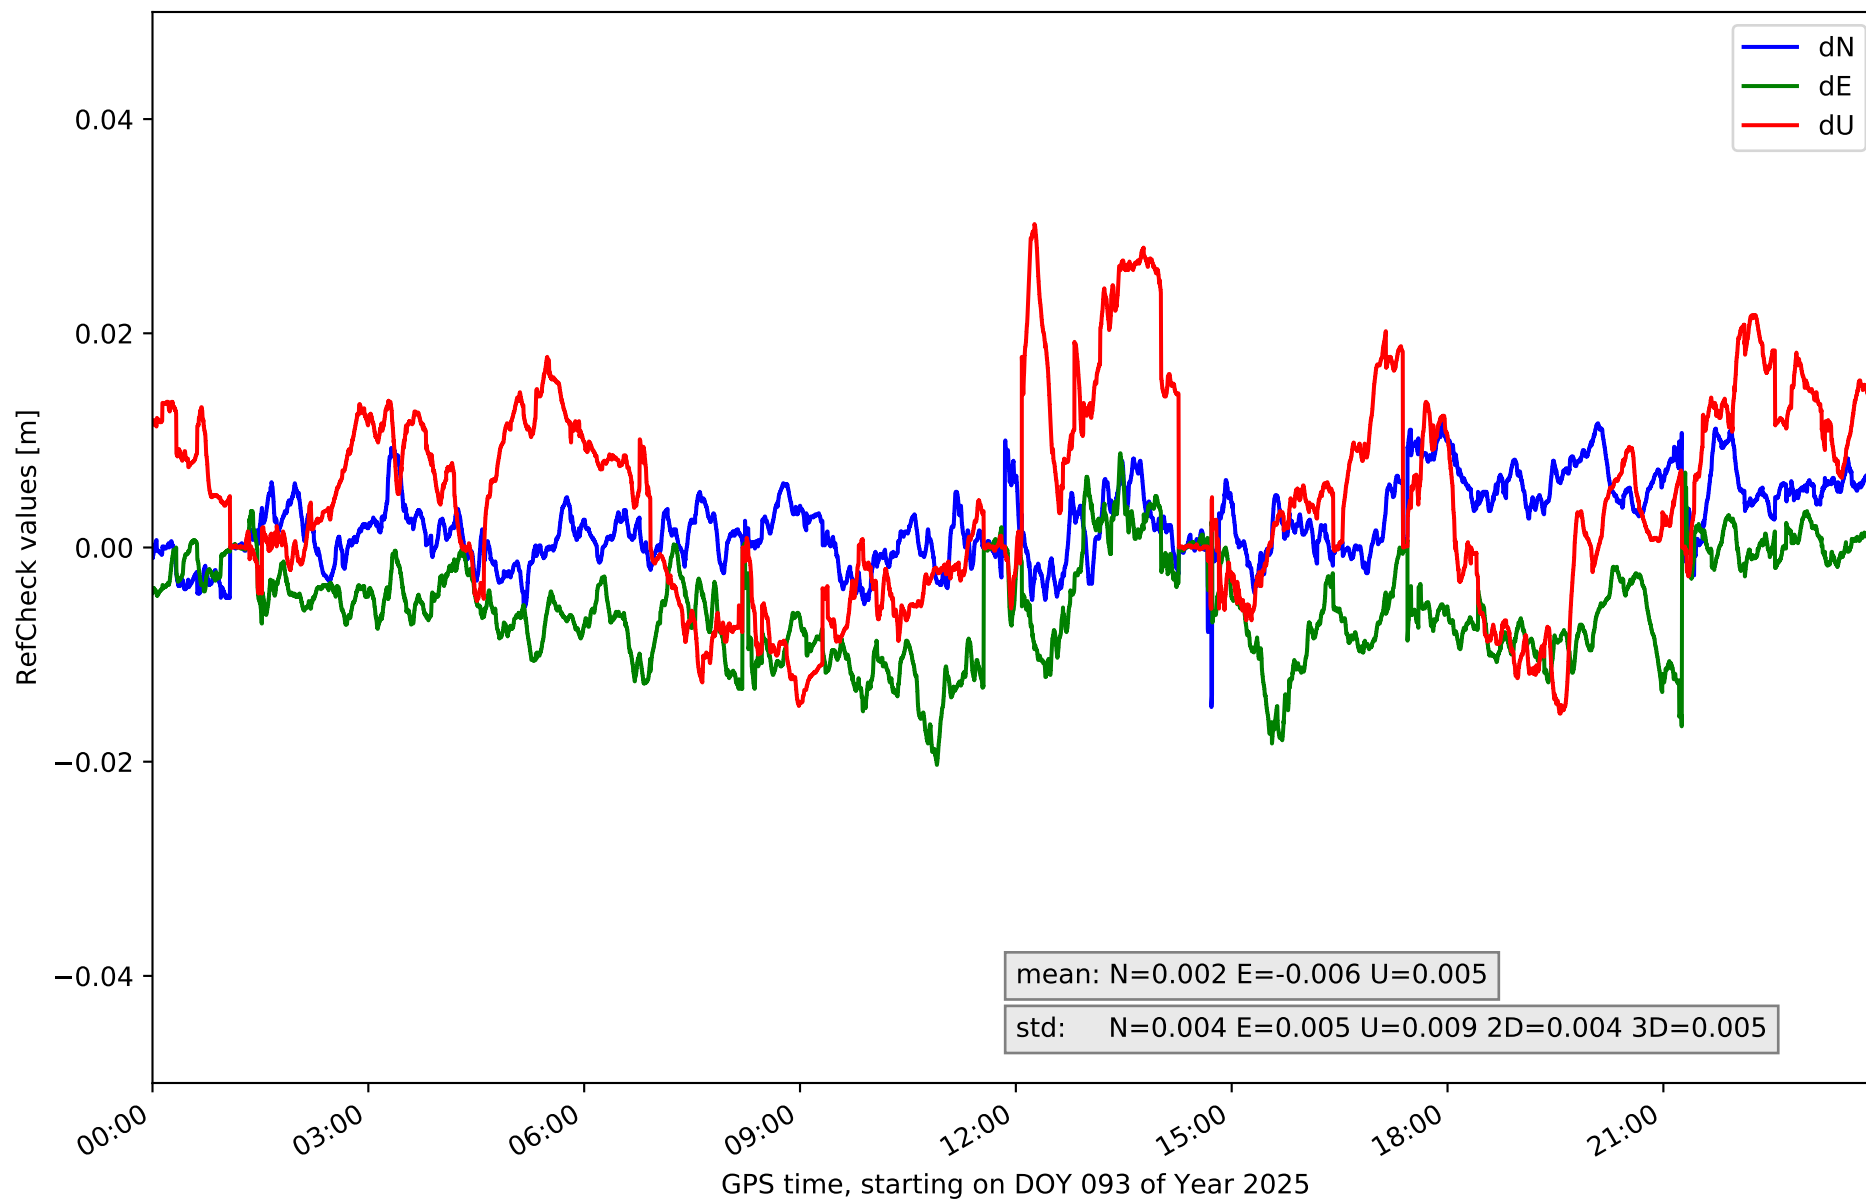

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.02	0.012	0.005	-0.005	0.036	0.01	-0.024	0.036	0.011	0.009	0.009	45807	64.6	30857	43.5
EH02	-0.011	0.023	0.006	-0.006	0.033	0.008	-0.018	0.037	0.012	0.008	0.008	59440	83.8	58274	82.2
GOM1	-0.039	0.022	0.009	-0.04	0.035	0.012	-0.062	0.075	0.023	0.009	0.015	43726	61.7	39100	55.1
IZAN	-0.018	0.014	0.005	-0.022	0.007	0.005	-0.027	0.037	0.014	0.004	0.008	28673	40.4	18461	26.0
LP01	-0.02	0.015	0.006	-0.008	0.02	0.005	-0.009	0.073	0.015	0.005	0.014	57144	80.6	42402	59.8
LP03	-0.018	0.019	0.005	-0.012	0.016	0.005	-0.032	0.019	0.011	0.004	0.006	11435	16.1	6696	9.4
LPAL	-0.017	0.017	0.004	-0.002	0.016	0.004	-0.027	0.043	0.01	0.004	0.007	28121	39.7	8702	12.3
LRES	-0.006	0.022	0.005	-0.001	0.027	0.006	-0.025	0.021	0.009	0.006	0.006	65689	92.6	36631	51.7
TN01	-0.036	0.023	0.009	-0.039	0.035	0.013	-0.081	0.06	0.016	0.009	0.012	49602	70.0	33015	46.6
TN02	-0.022	0.024	0.007	-0.035	0.032	0.008	-0.022	0.078	0.018	0.006	0.013	29032	40.9	41744	58.9
TN03	-0.029	0.025	0.007	-0.018	0.028	0.007	-0.013	0.034	0.009	0.006	0.008	21950	31.0	19609	27.7
TN06	-0.013	0.026	0.006	-0.023	0.027	0.007	-0.081	0.014	0.018	0.005	0.017	31477	44.4	66290	93.5
TN09	-0.016	0.019	0.007	-0.026	0.009	0.007	-0.054	0.027	0.018	0.006	0.01	38586	54.4	30064	42.4
TE11	-0.015	0.012	0.004	-0.02	0.009	0.005	-0.015	0.03	0.009	0.004	0.005	20693	29.2	3897	5.5
Mean	-0.02	0.02	0.006	-0.018	0.024	0.007	-0.035	0.042	0.014	0.006	0.01	37955.4	53.5	31124.4	43.9
Min/Max	-0.039	0.026	0.009	-0.04	0.036	0.013	-0.081	0.078	0.023	0.009	0.017	65689	92.6	66290	93.5

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	81.7	82.2	77.3	84.7	80.4
considering satellites with dual-frequency fixed	76.6	78.4	66.4	80.1	78.2
considering all signals separately	77.2	78.8	66.4	80.6	76.6