

summary for network NT32

timeperiod chosen: from 2026-01-14-00:00:00 until 2026-01-14-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.3 seconds


average fixing percentage with threshold set to 0.3: 92.1 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: LEICA GR50	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

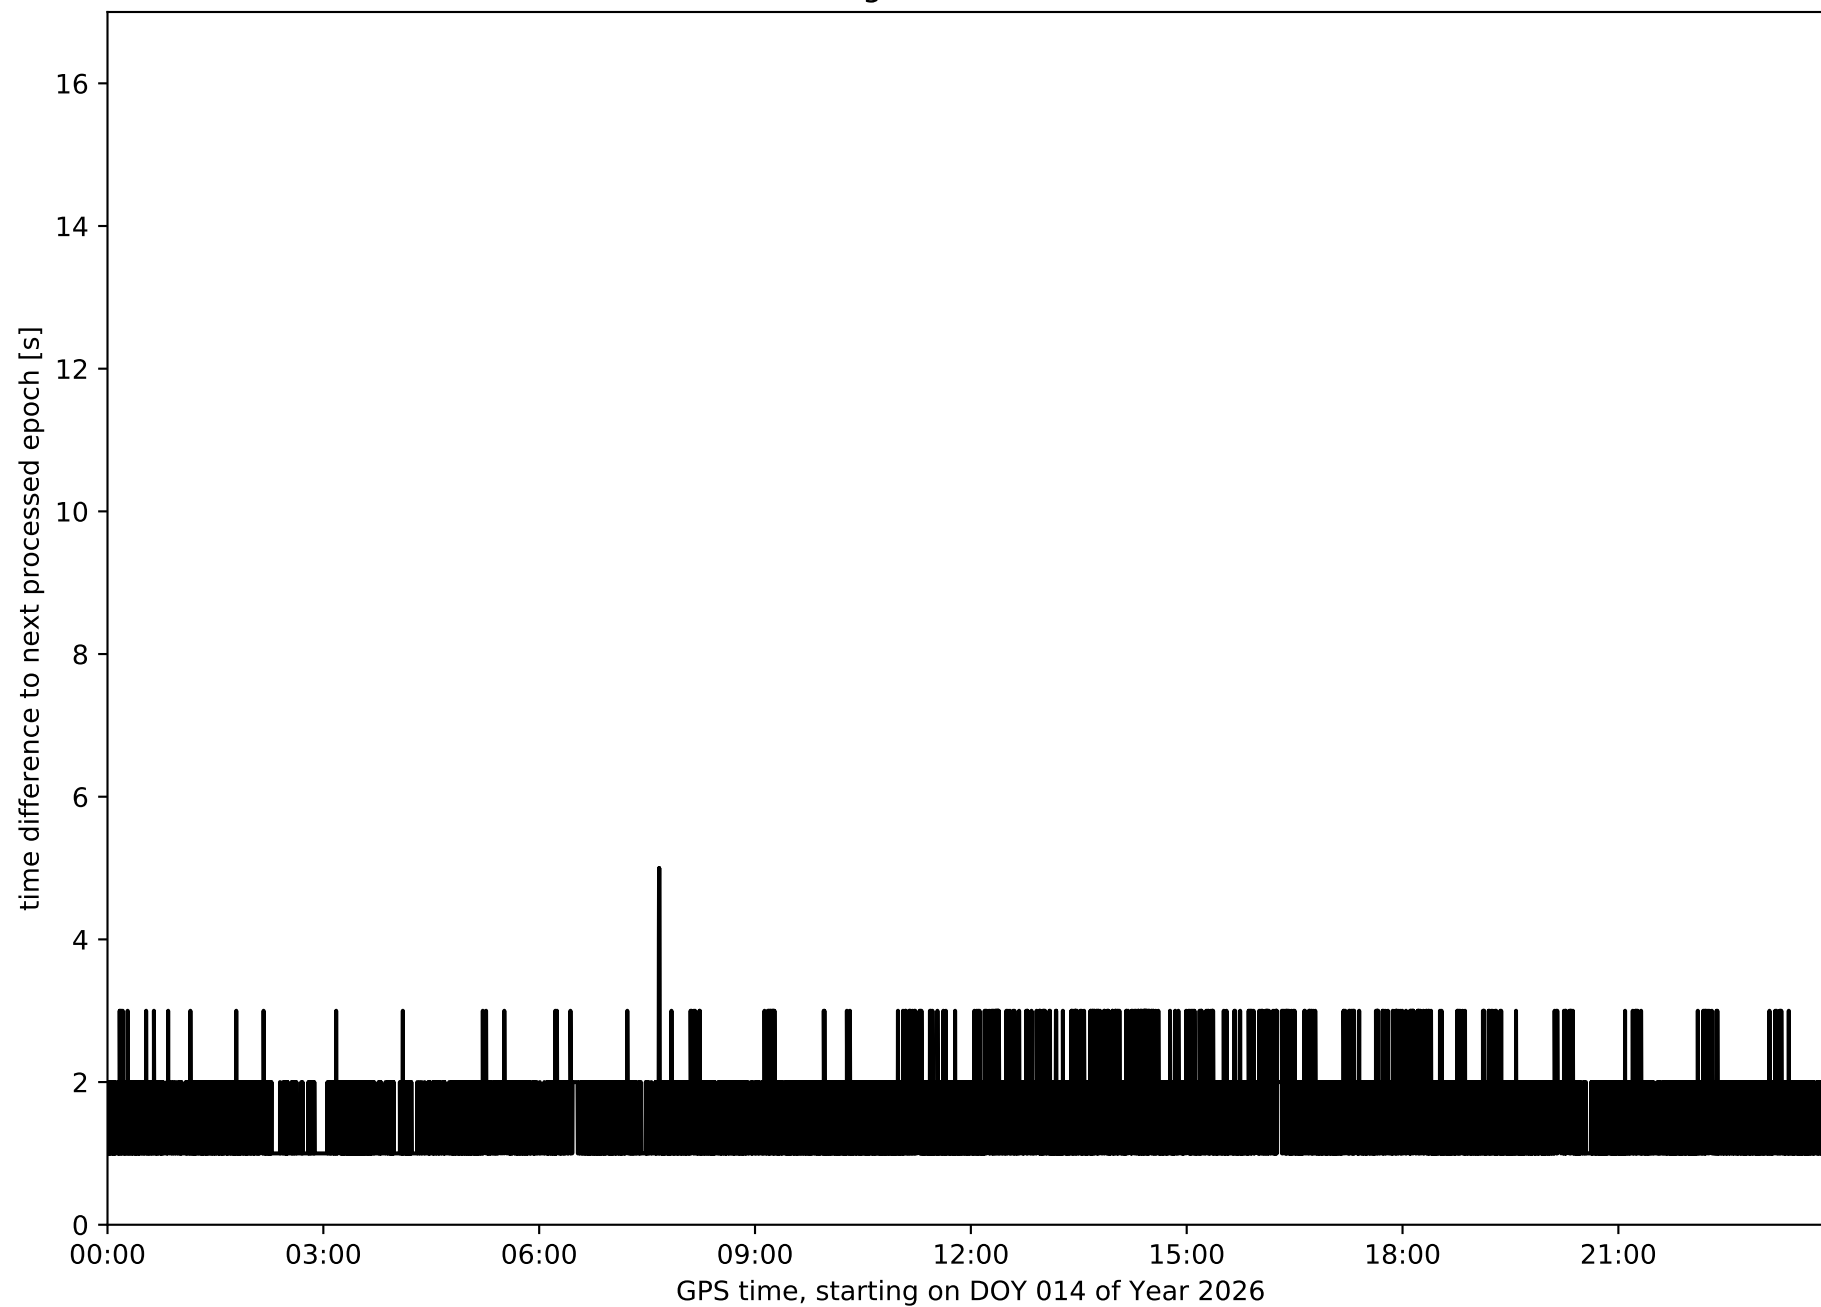


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

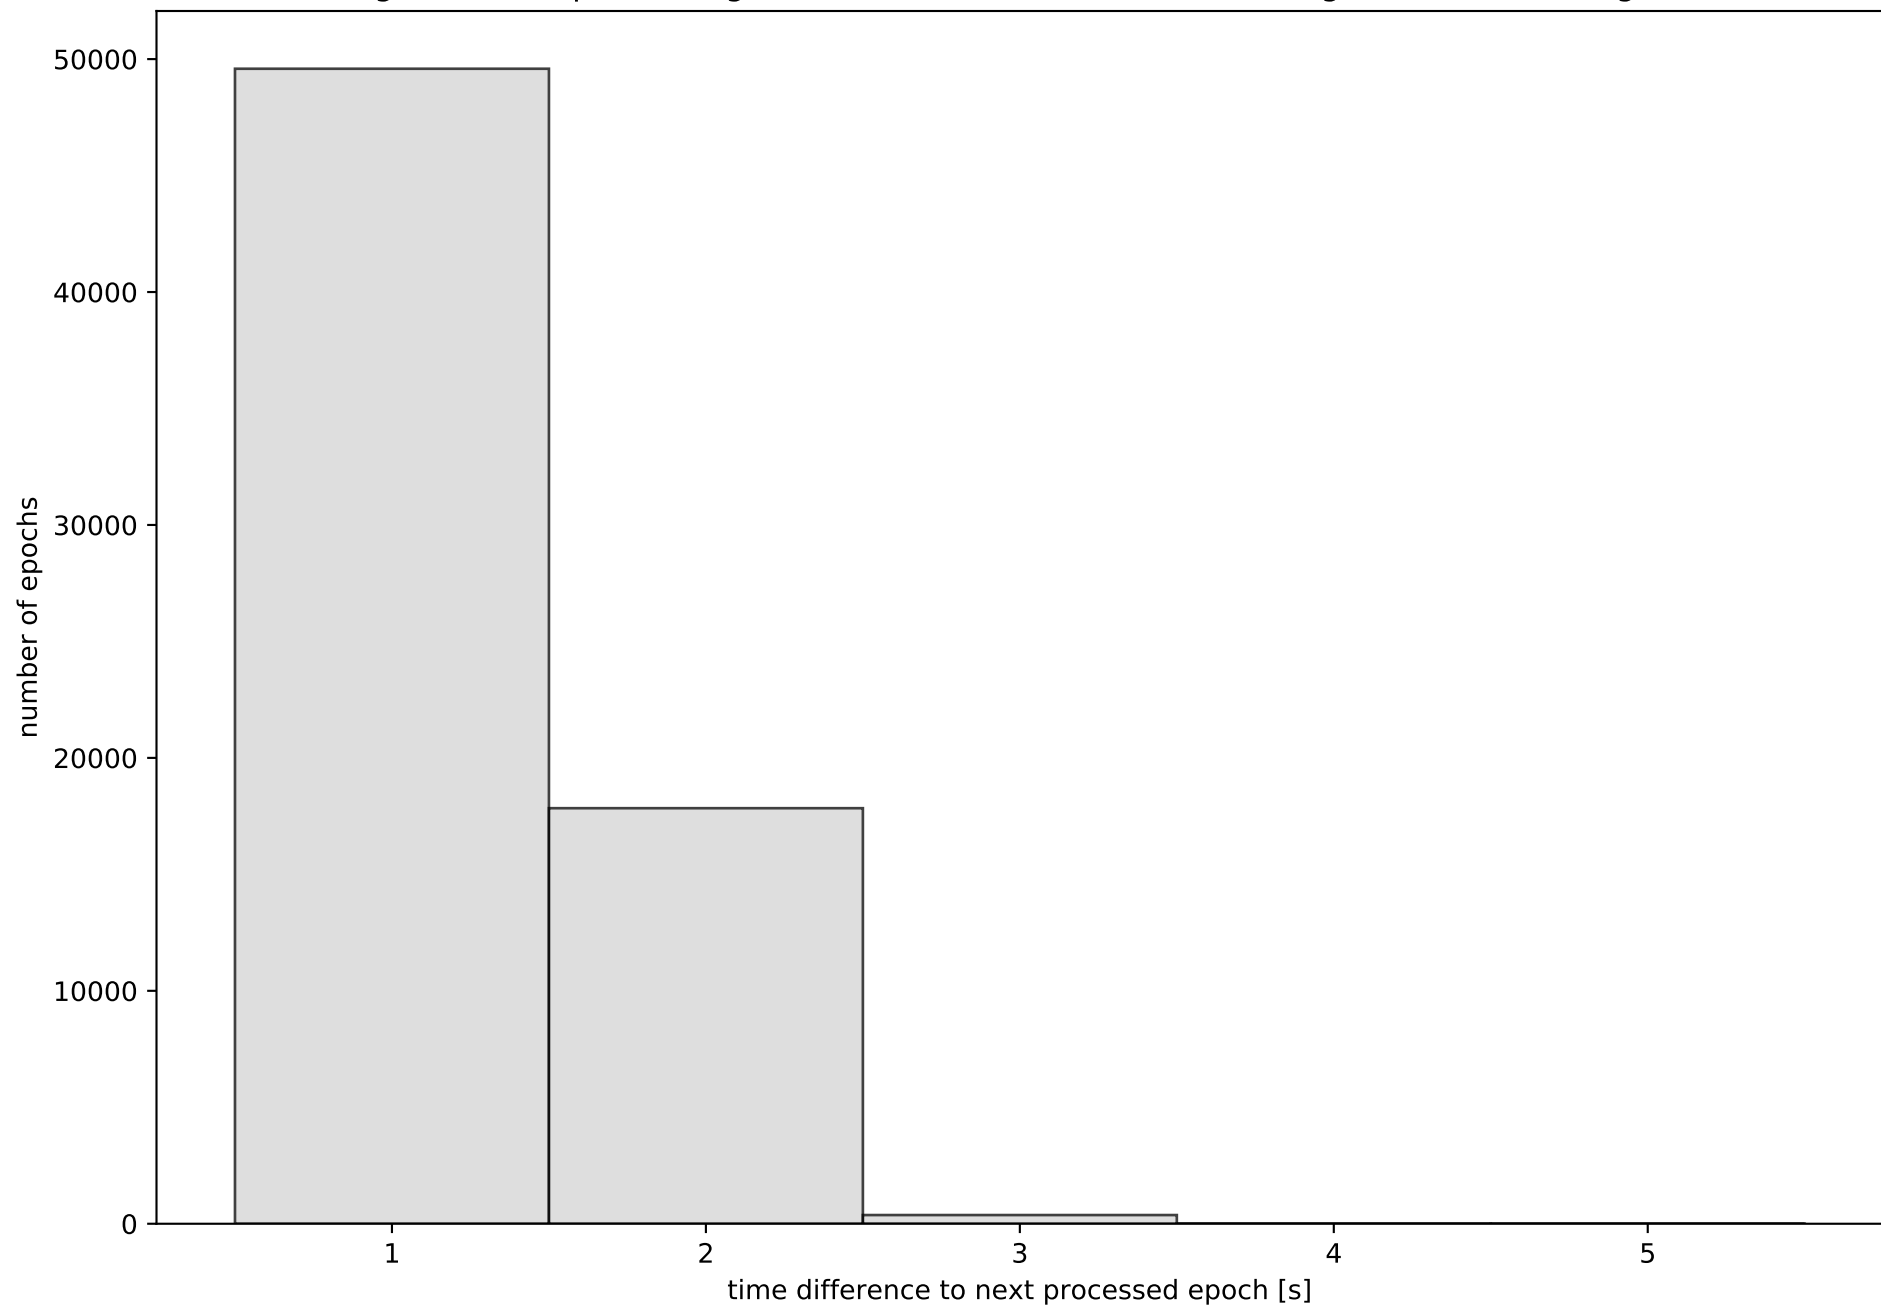


Network NT32 with threshold set to 0.3

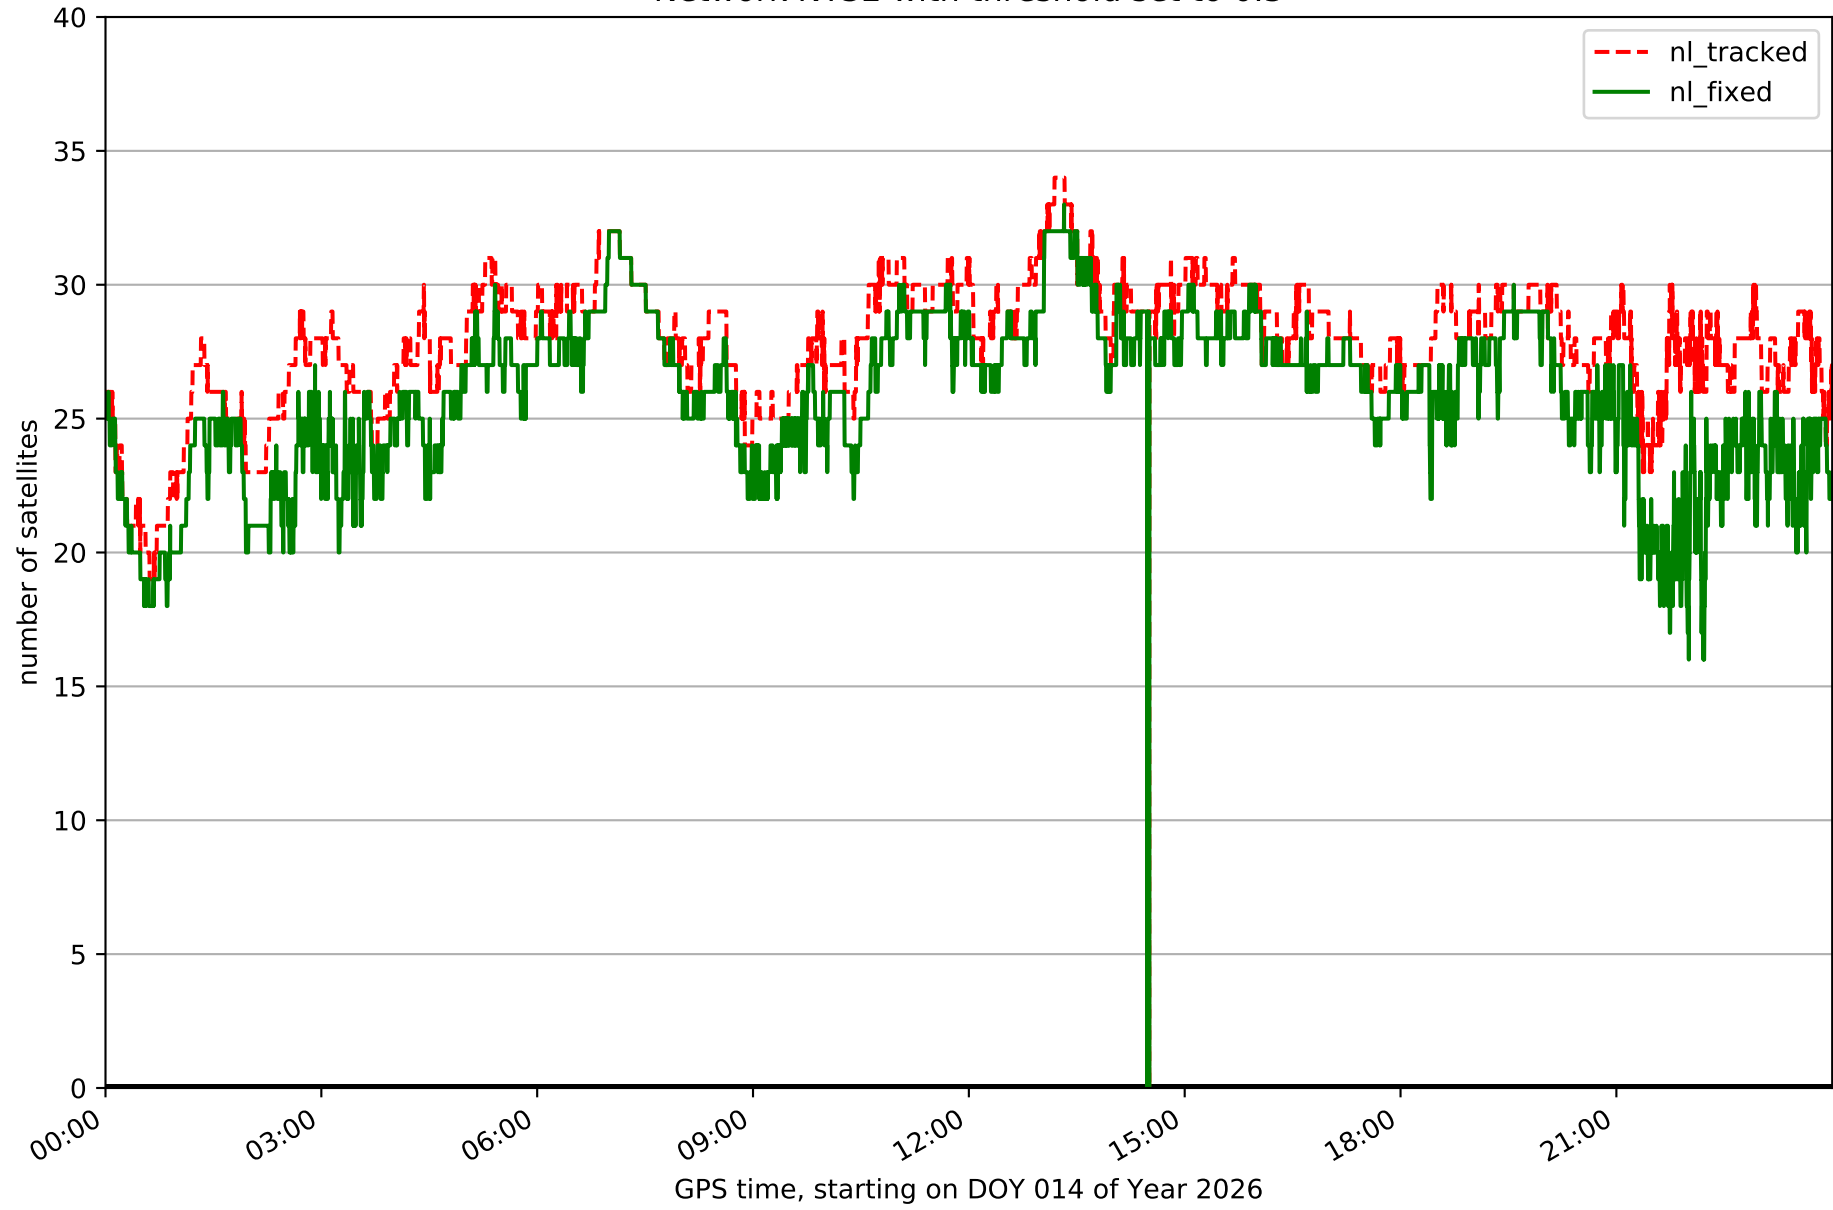


Fixing percentage of satellites in network NT32 with threshold set to 0.3

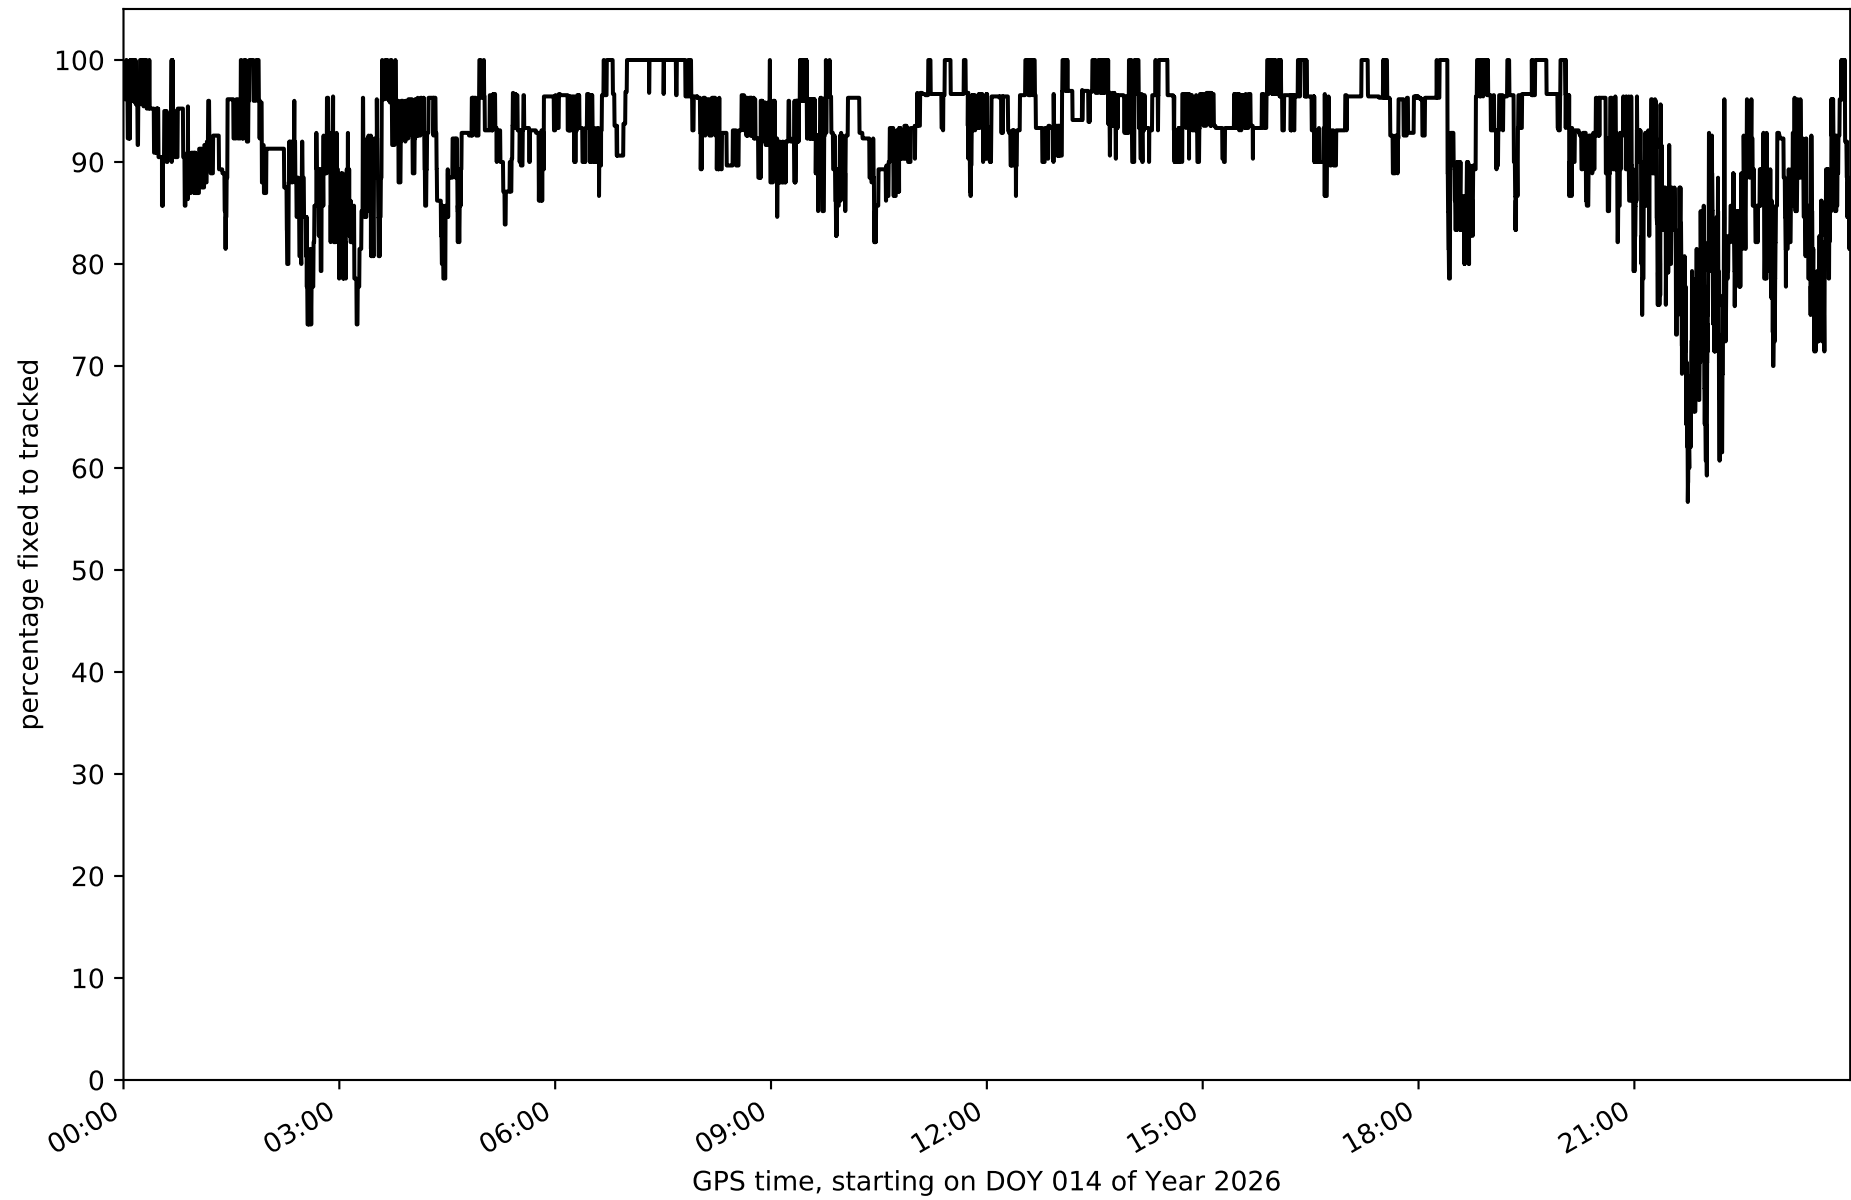


Network NT32 - only GPS with threshold set to 0.3

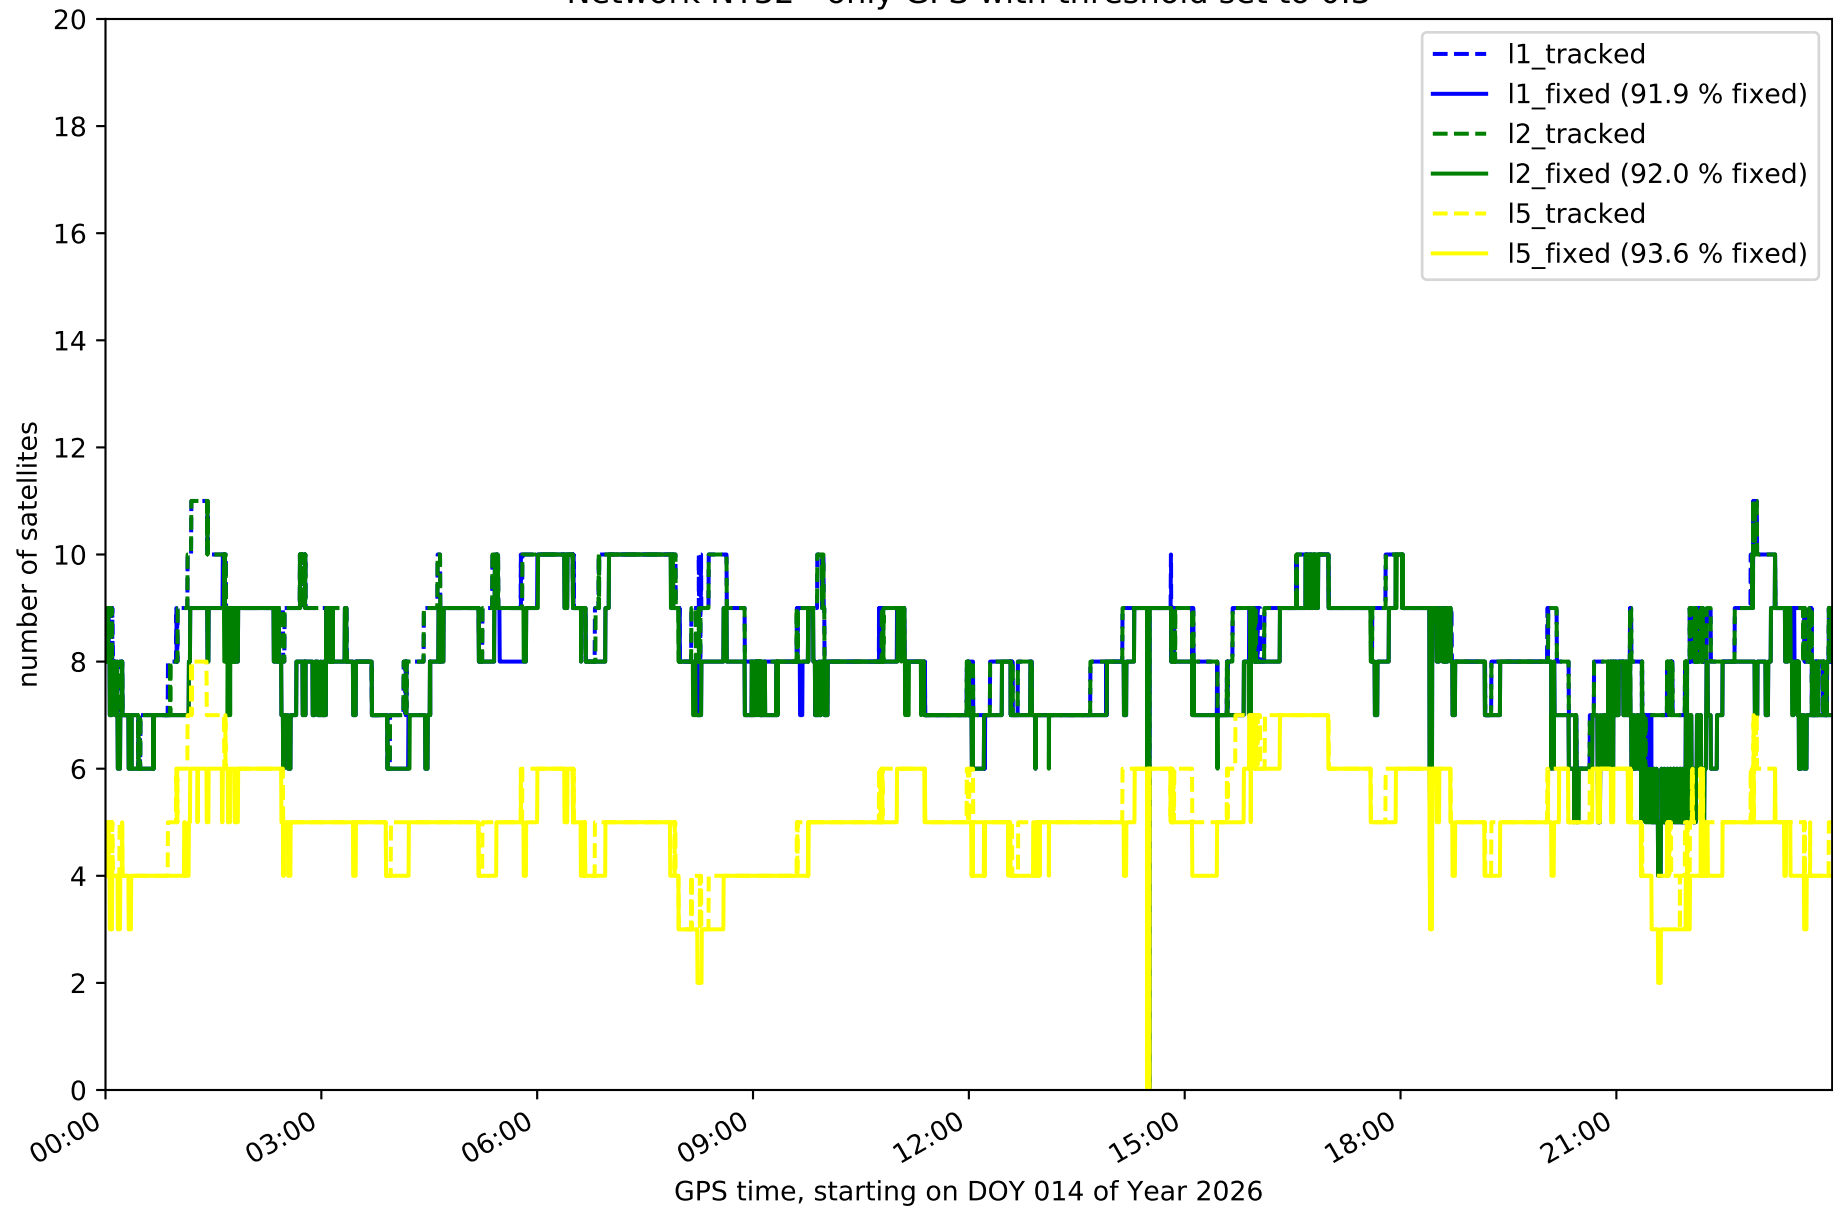


Network NT32 - only GLONASS with threshold set to 0.3

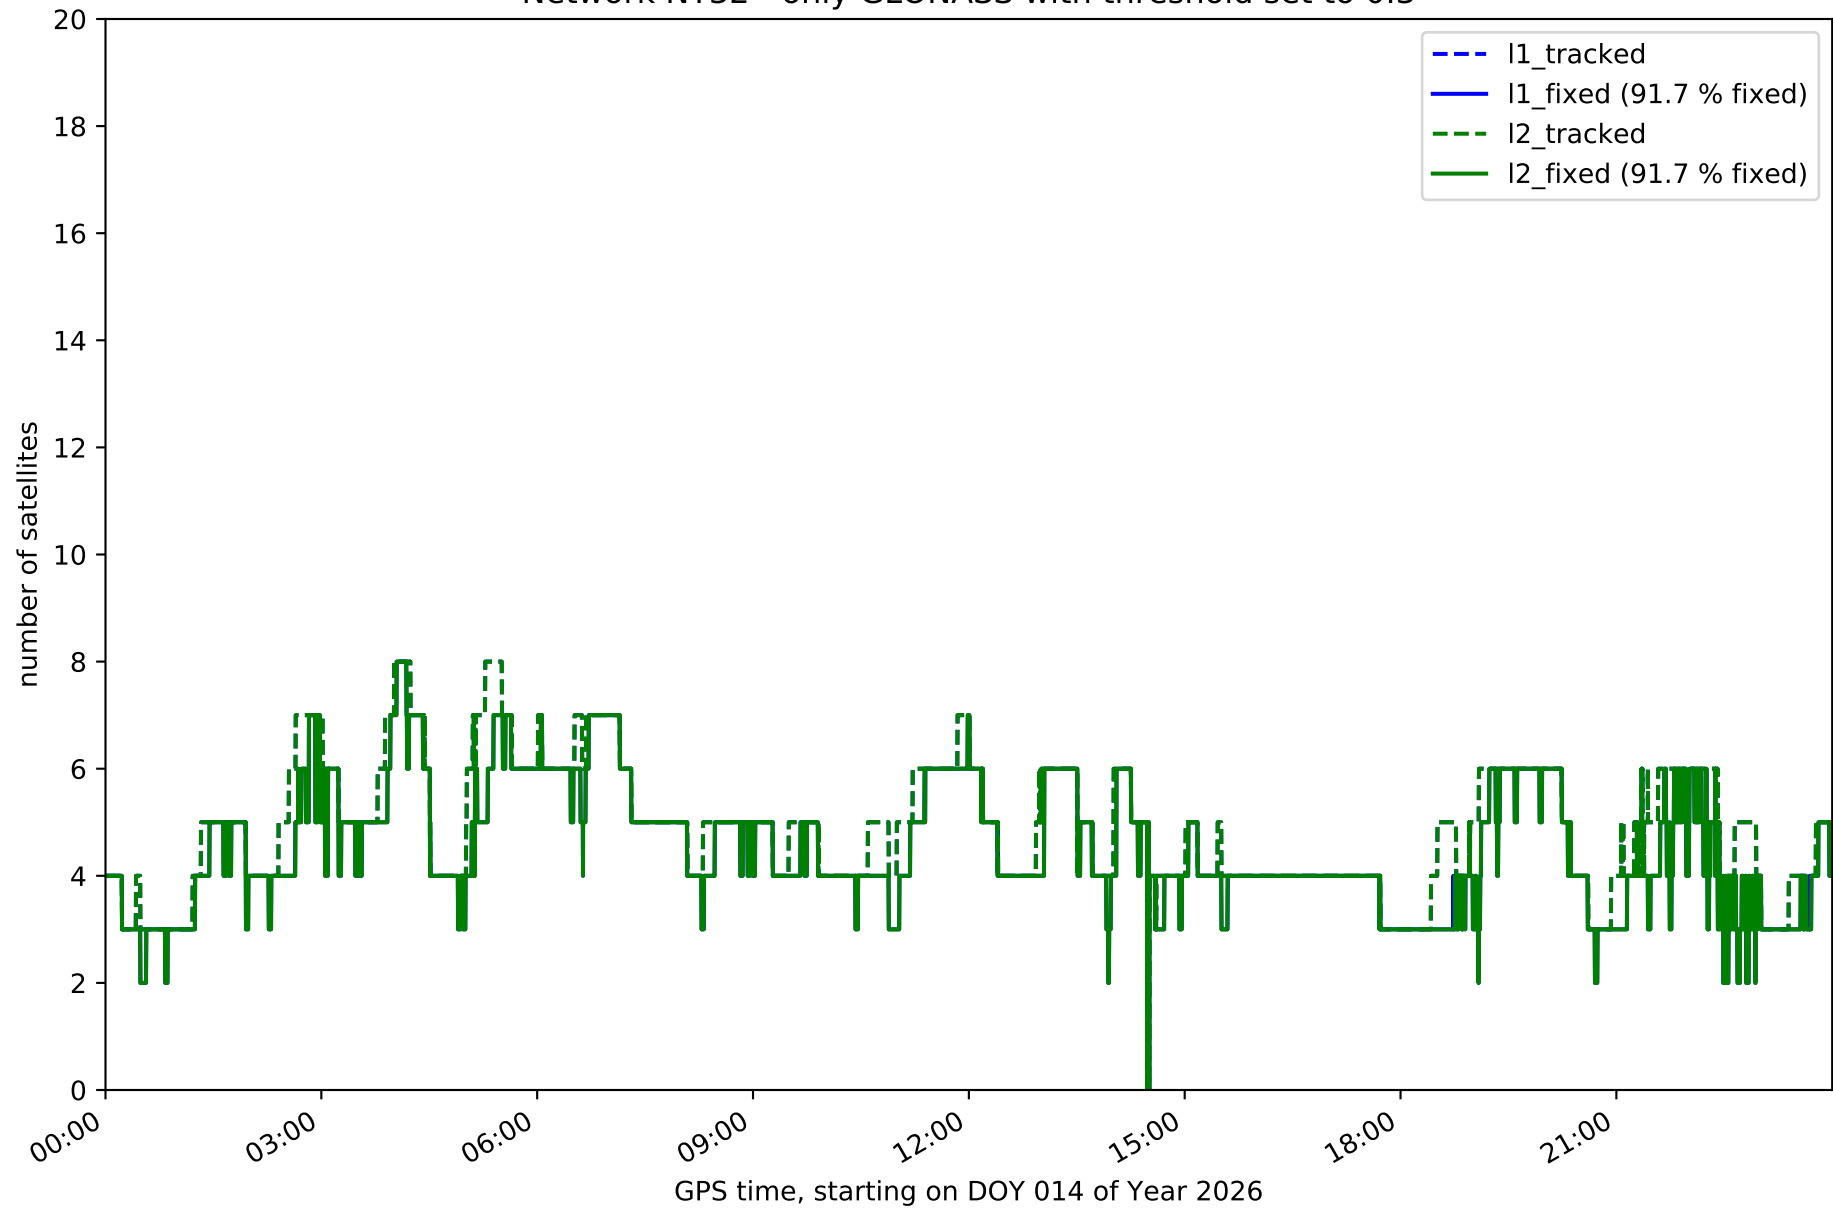


Network NT32 - only BDS with threshold set to 0.3

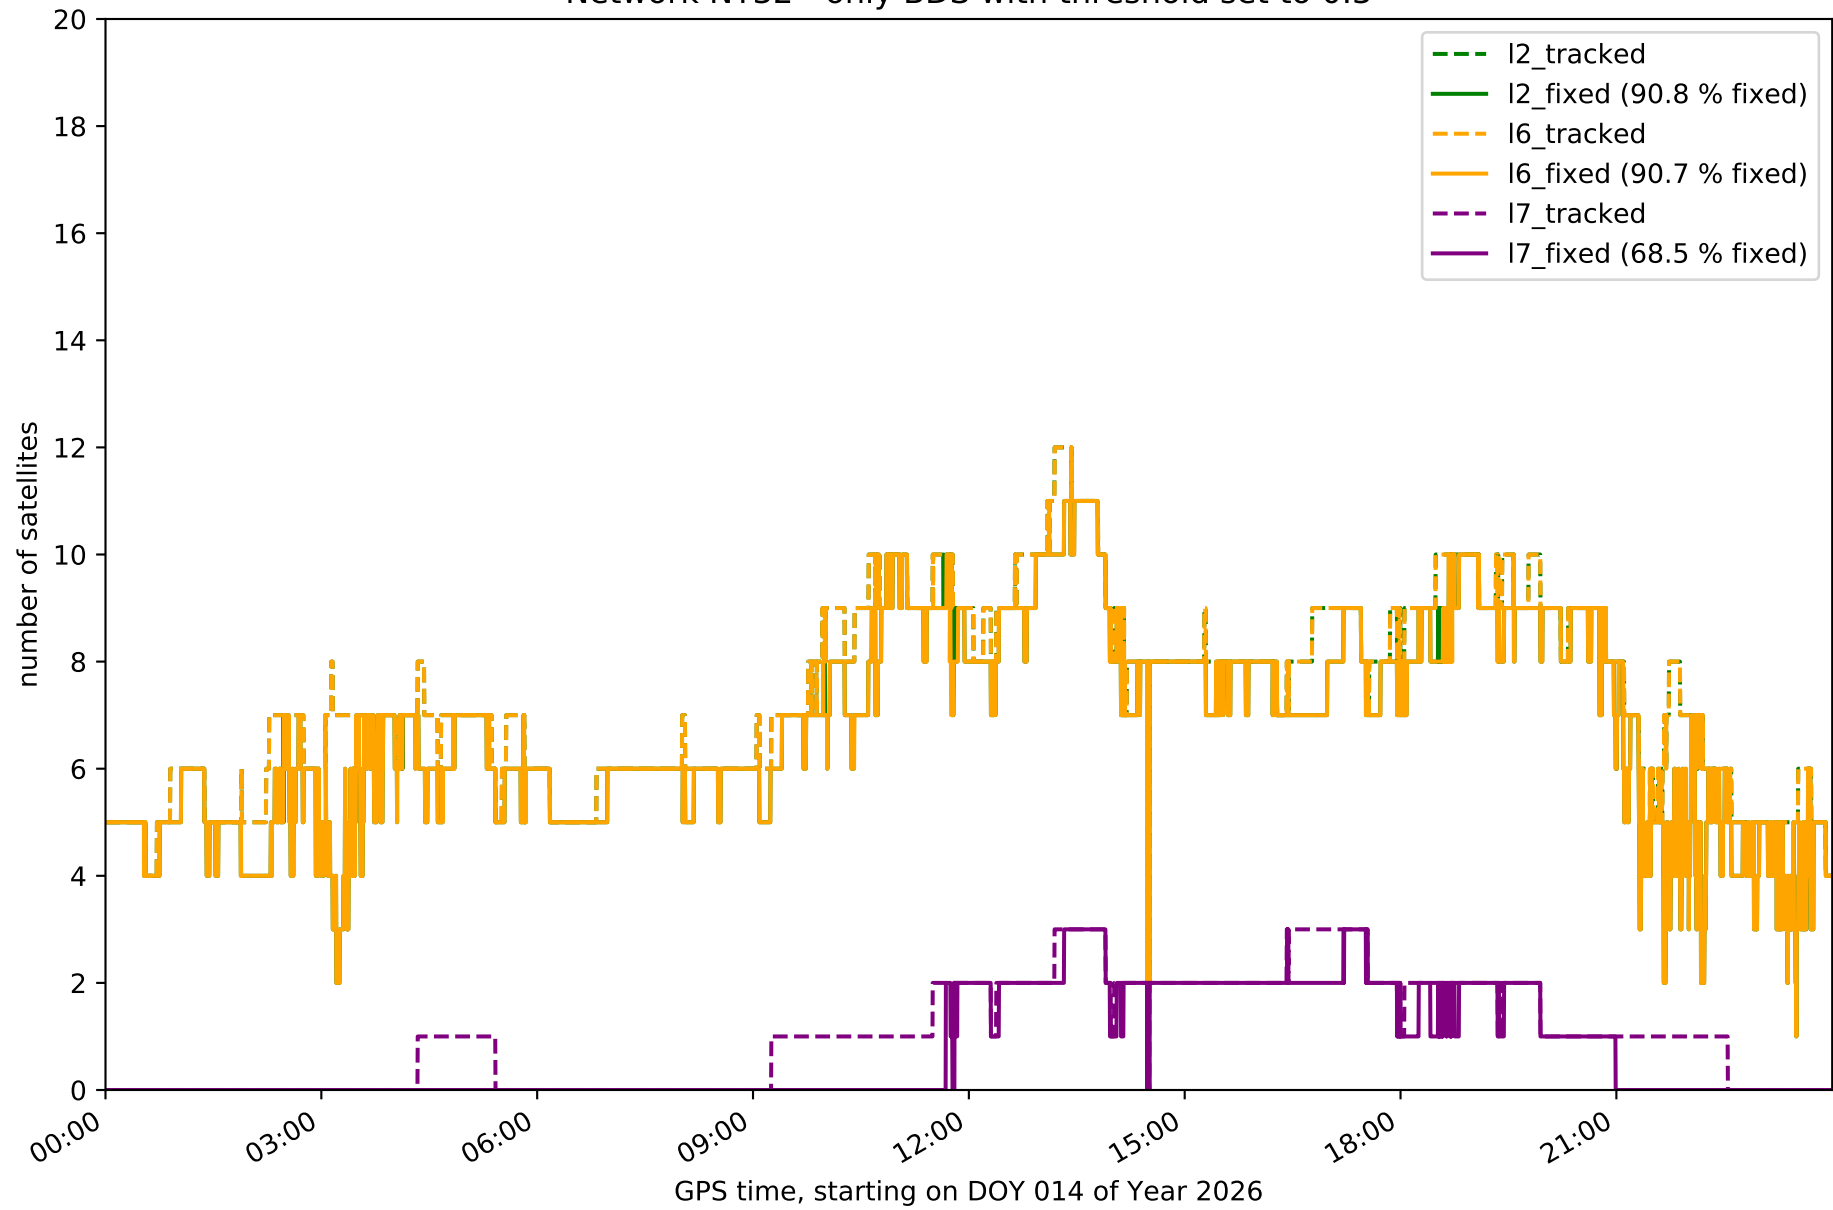


Network NT32 - only Galileo with threshold set to 0.3

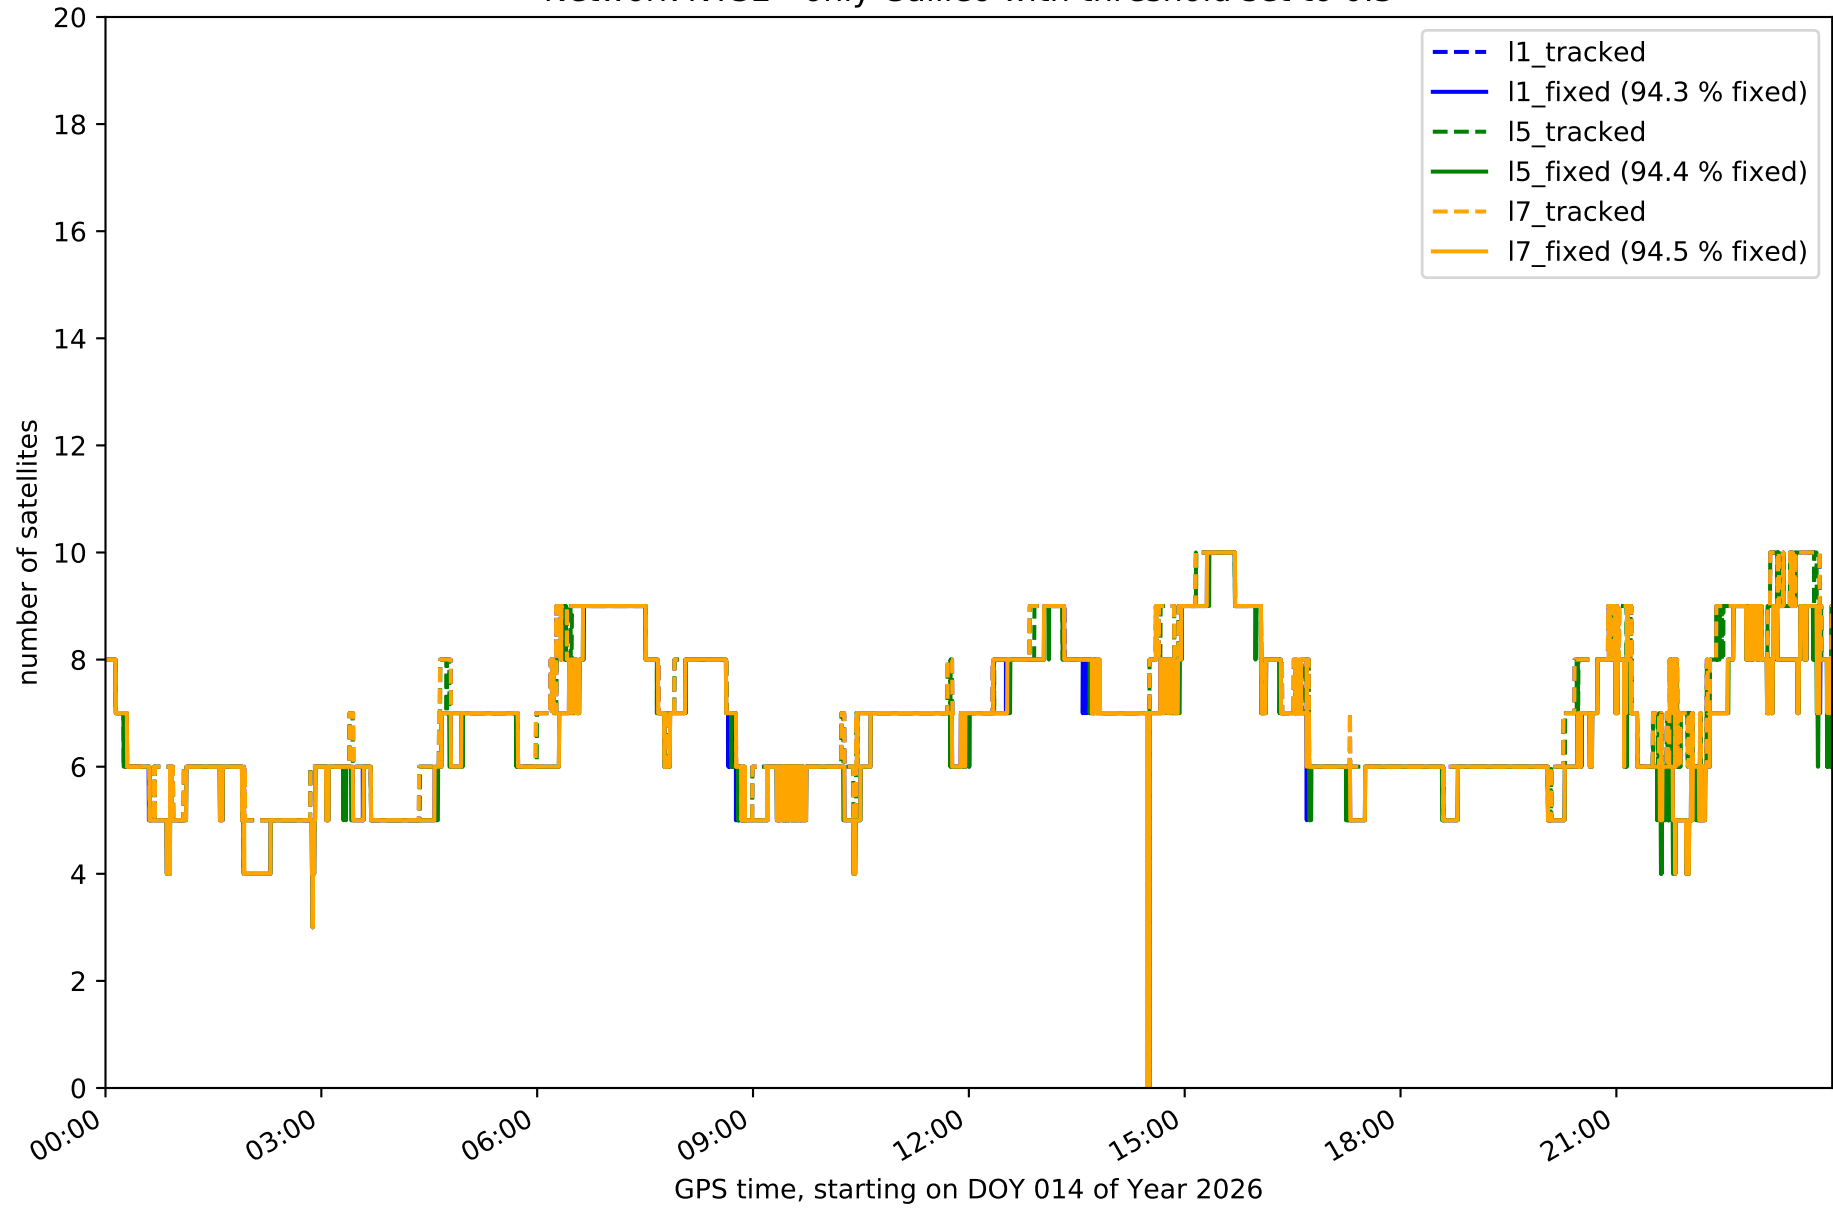


Station EH01 in network NT32

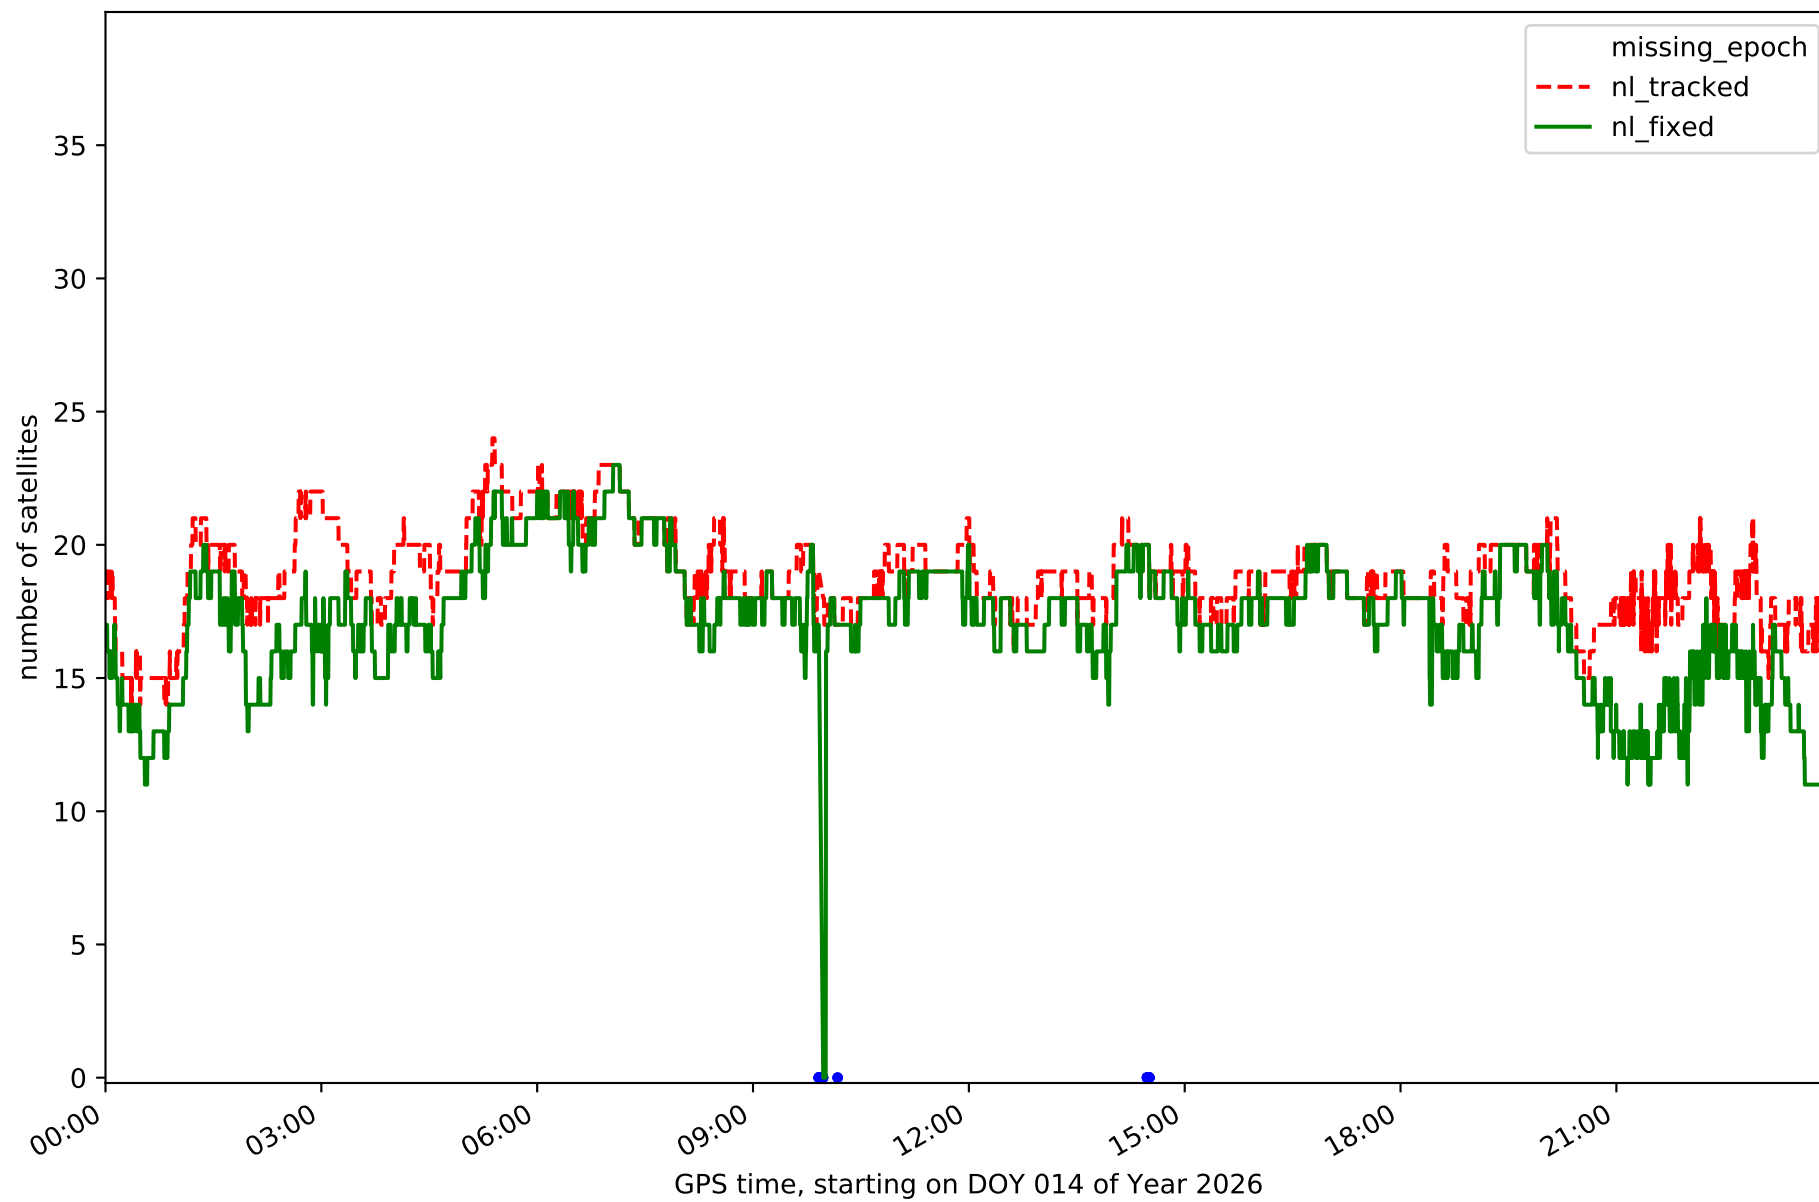


Station EH02 in network NT32

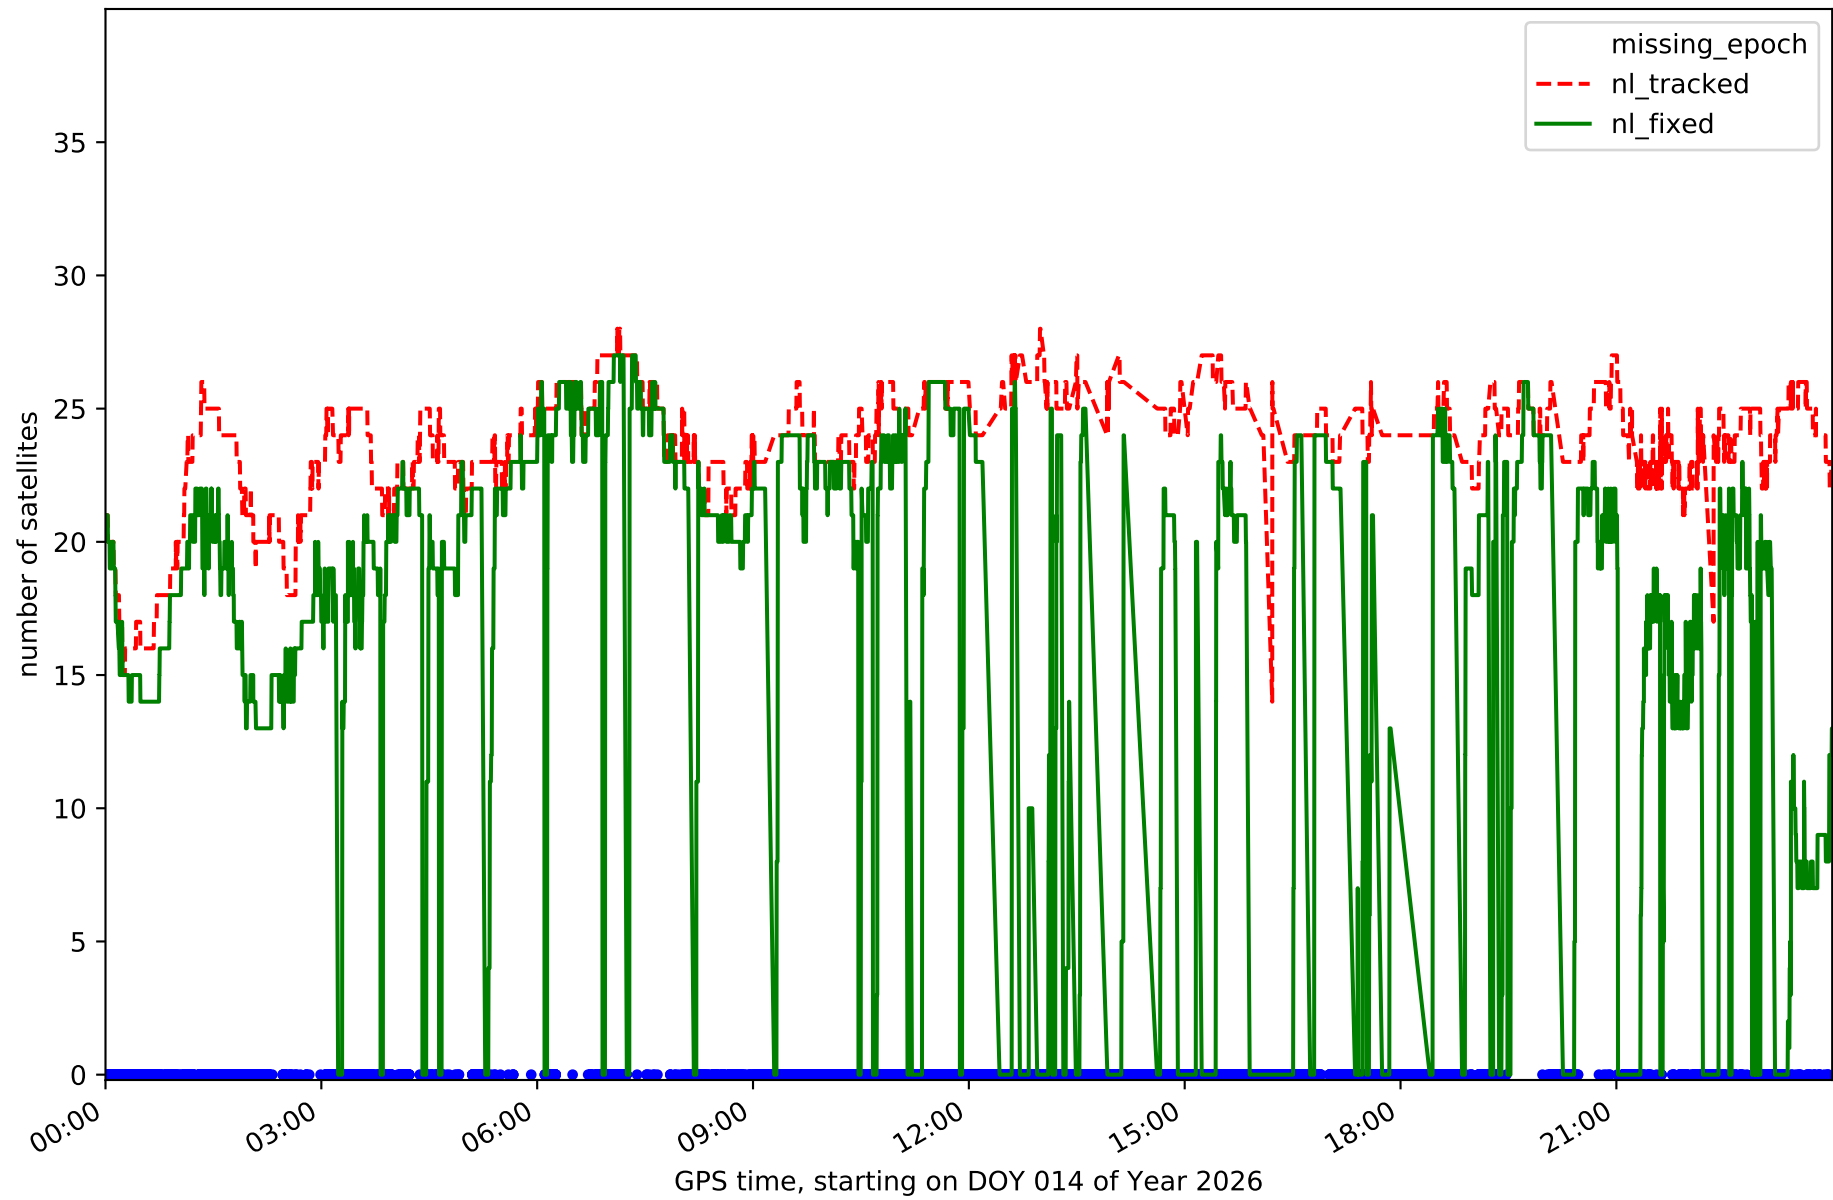


Station GOM1 in network NT32

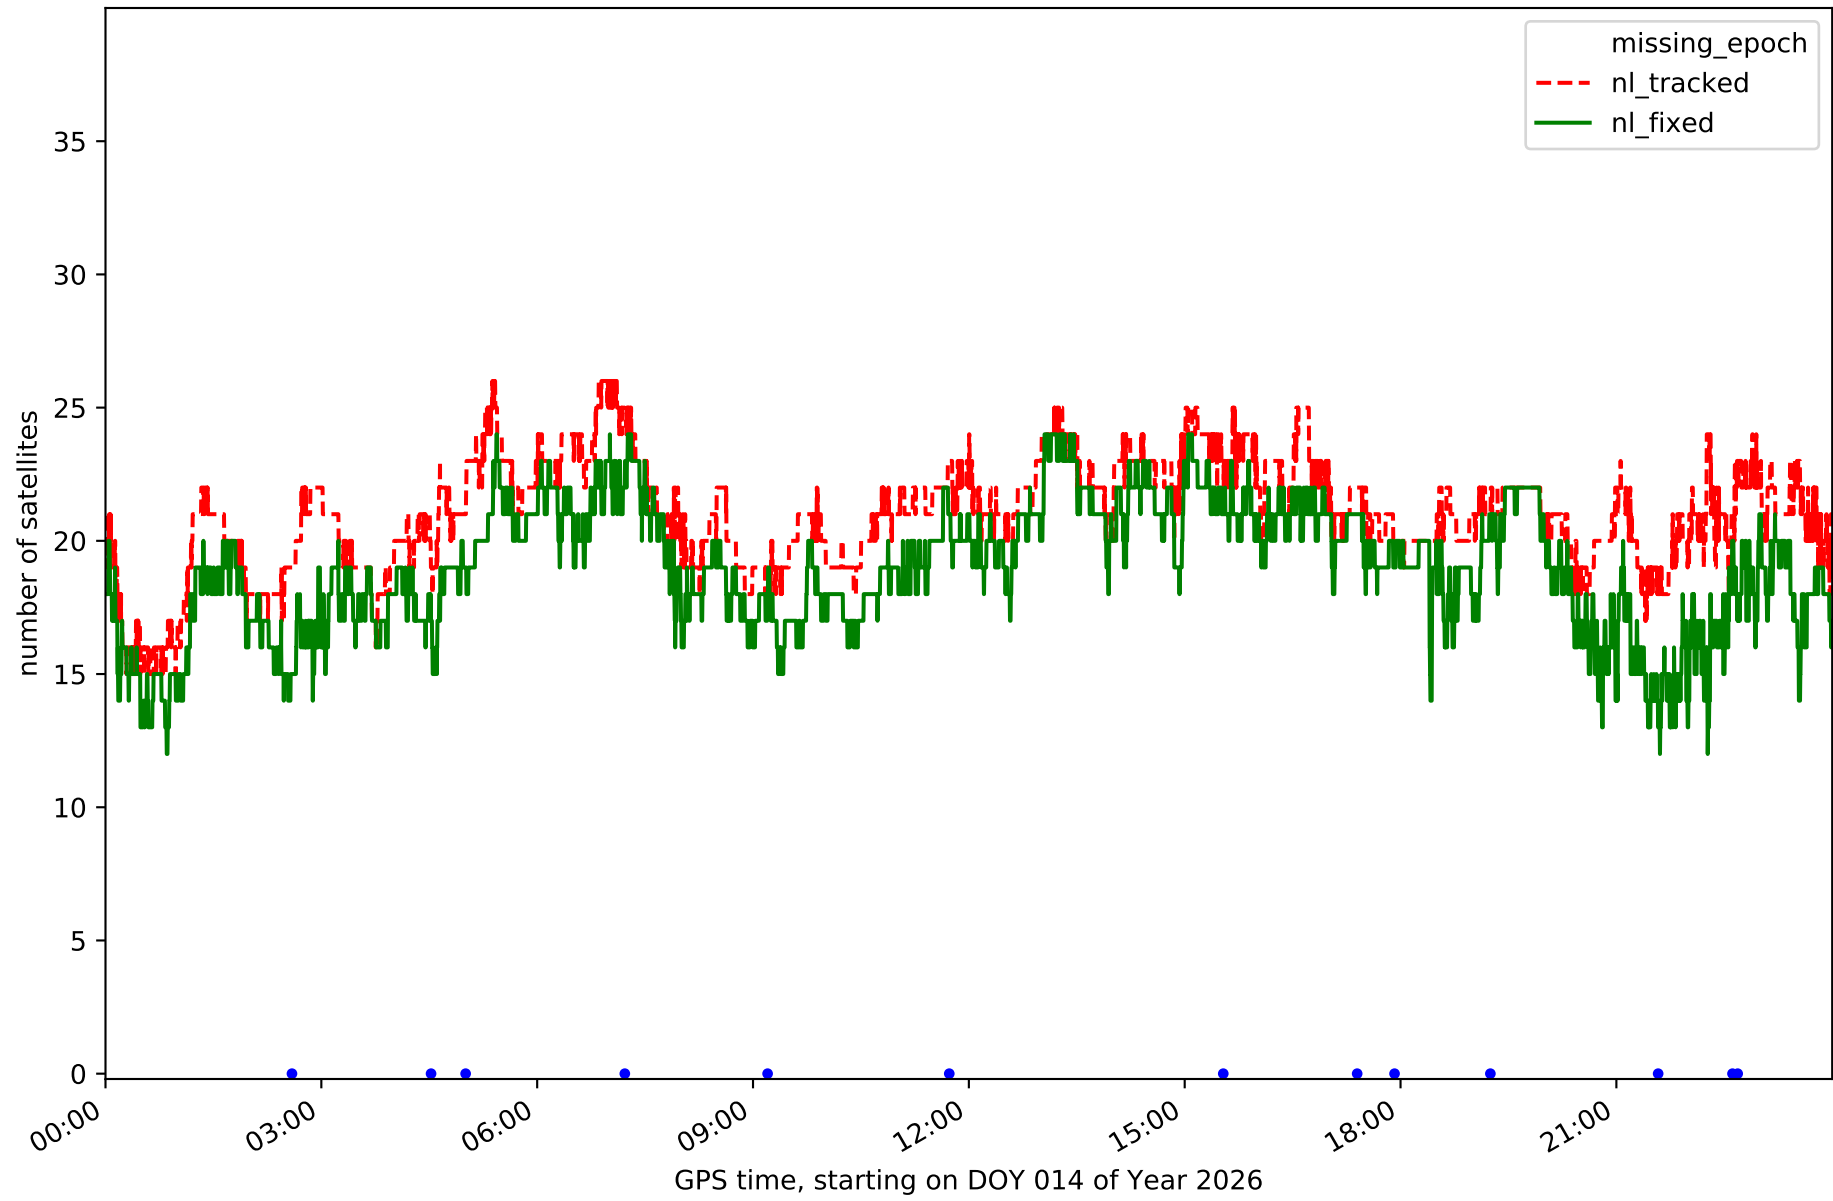


Station GOME in network NT32

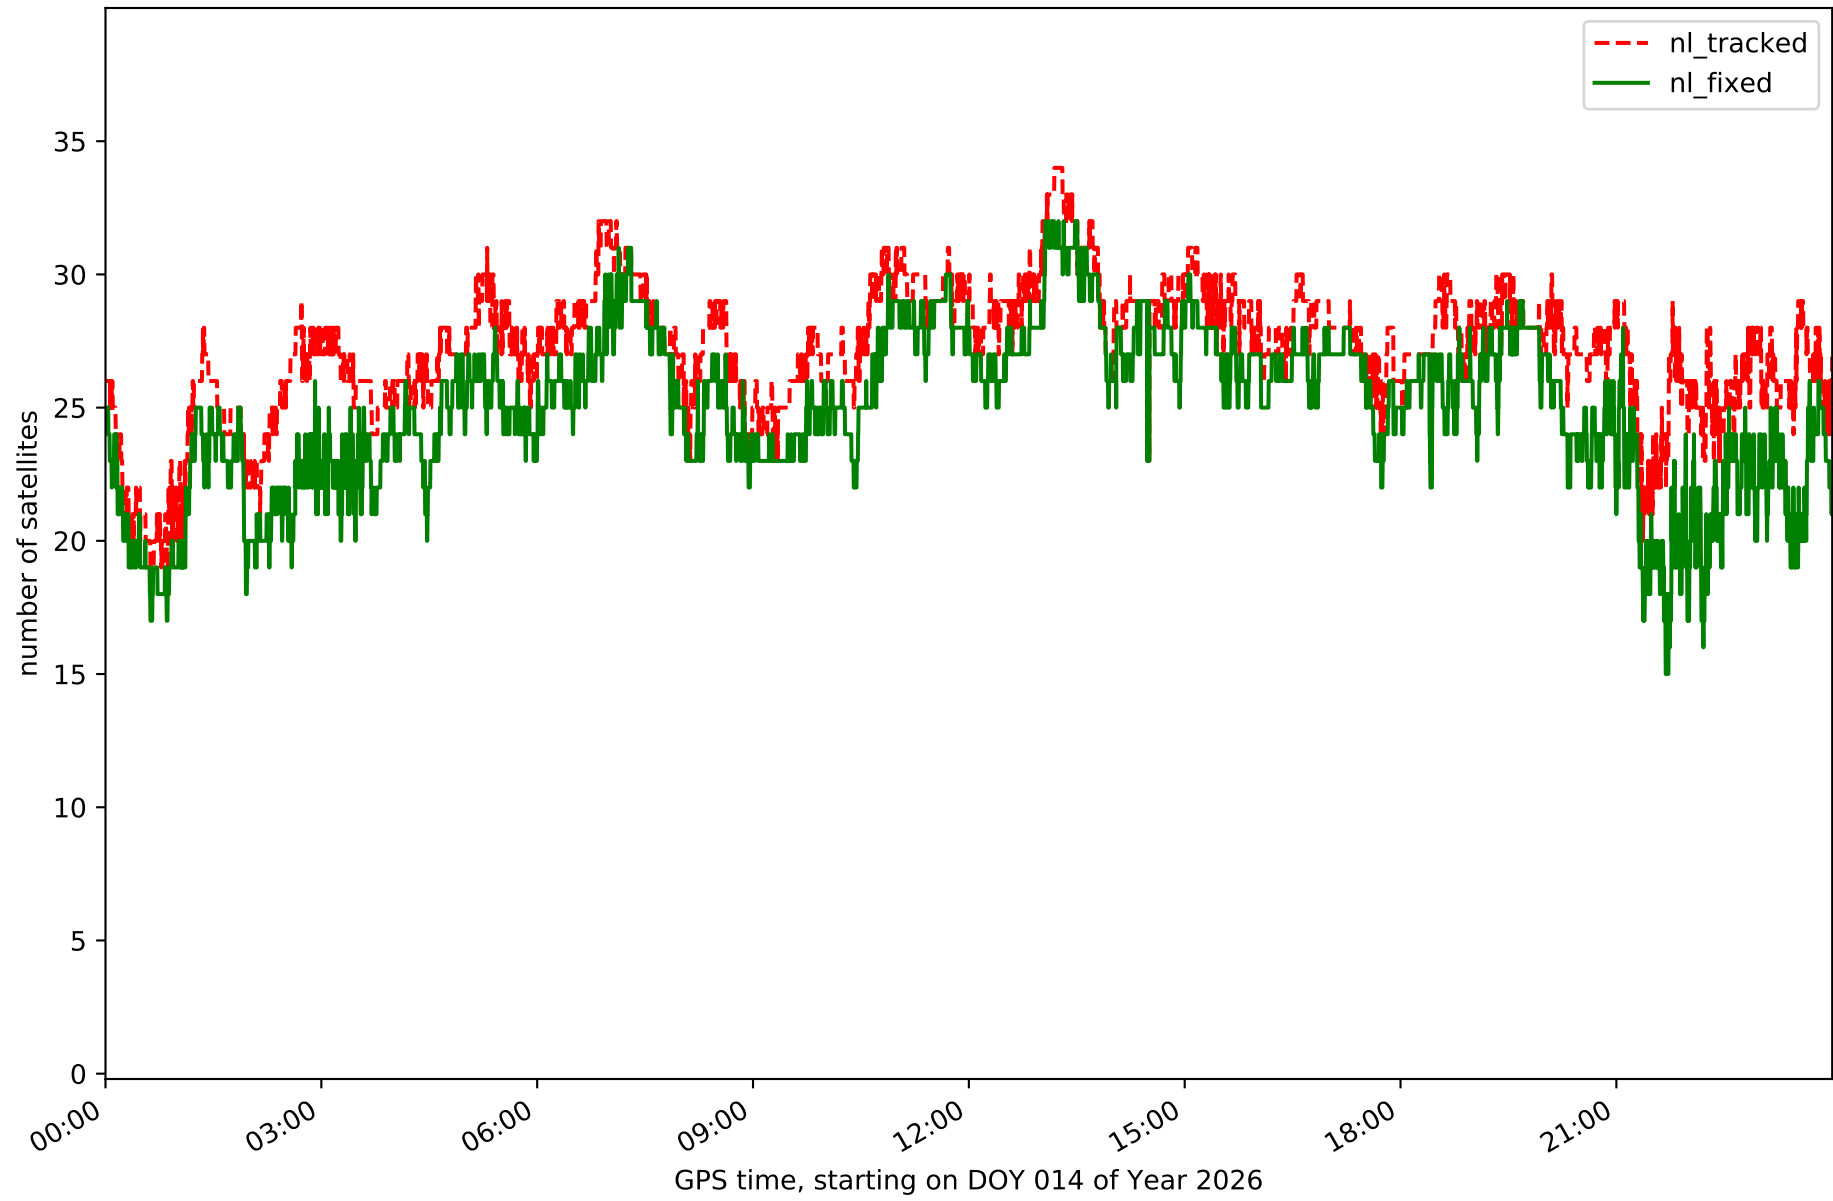


Station IZAN in network NT32

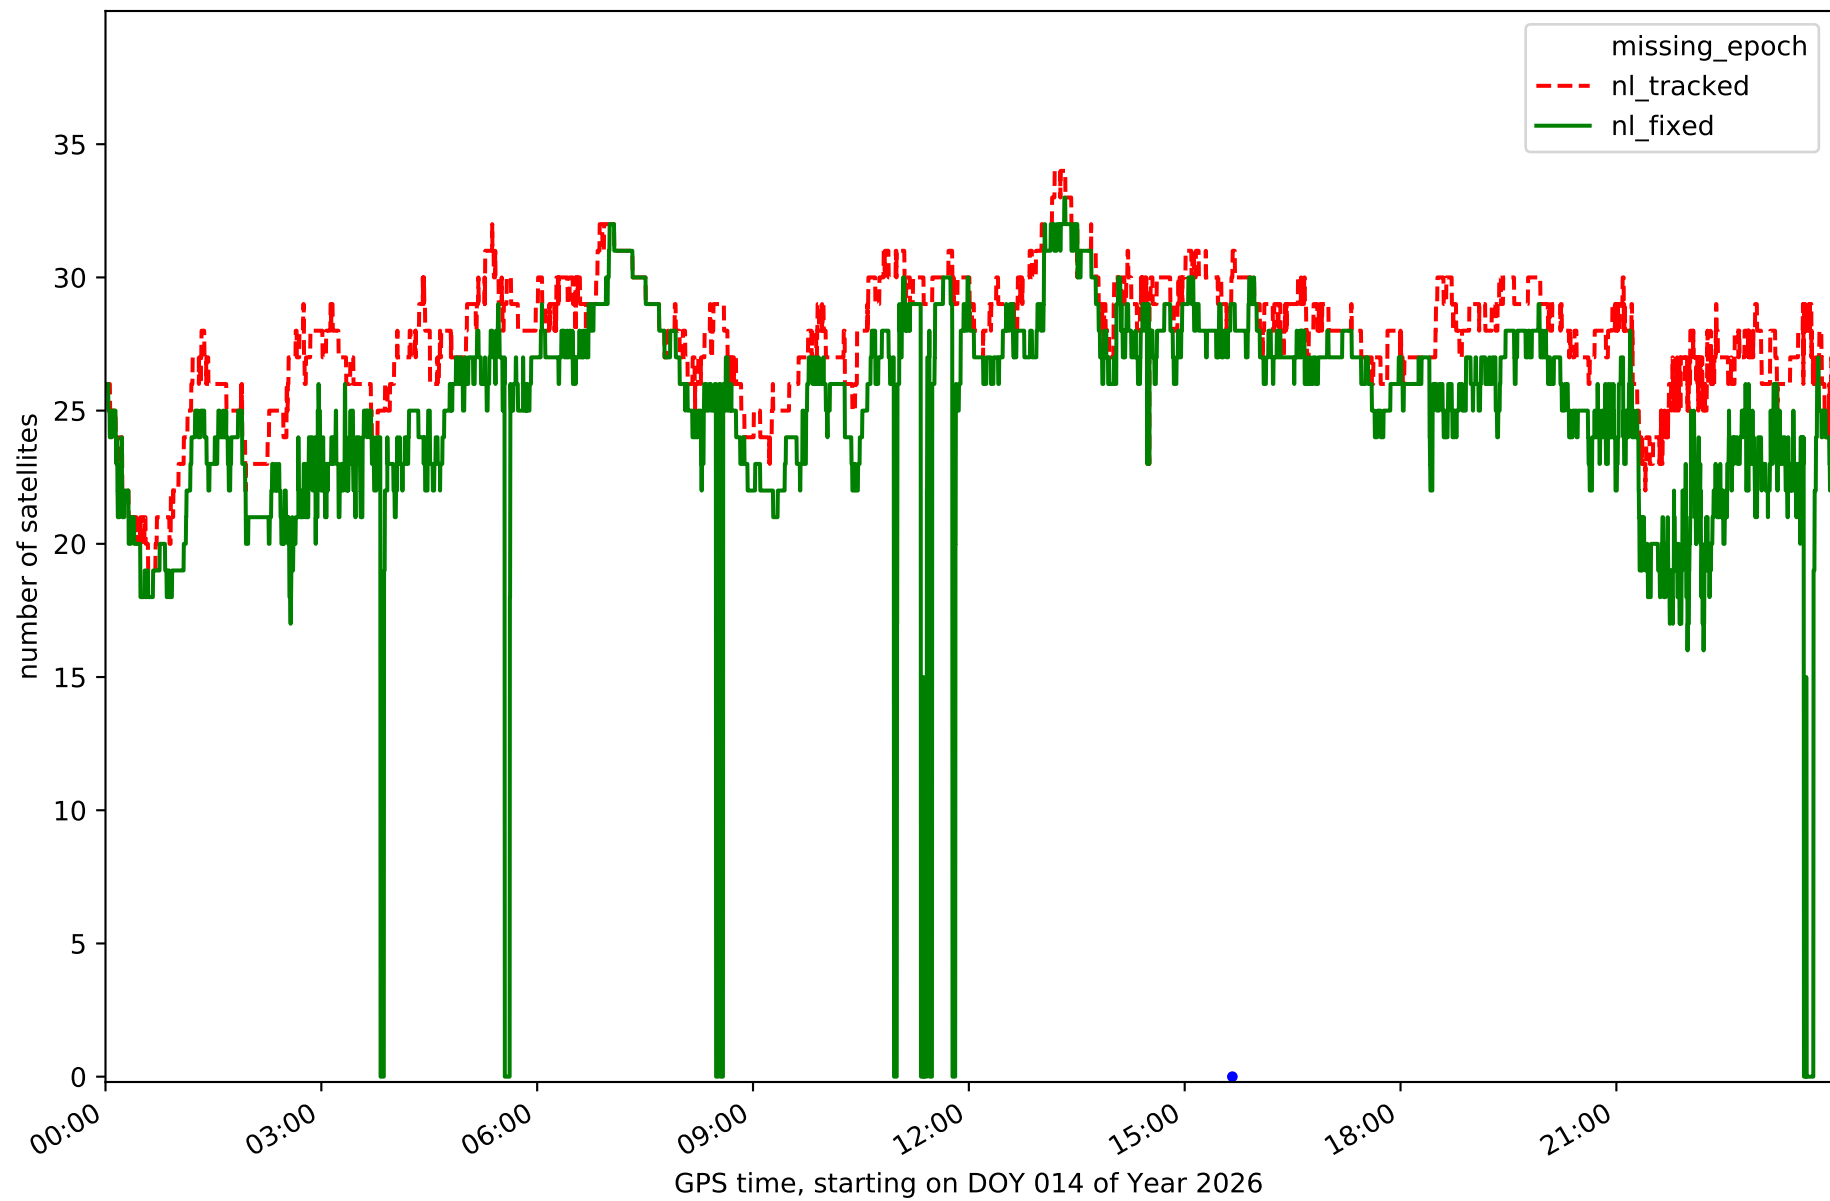


Station LP01 in network NT32

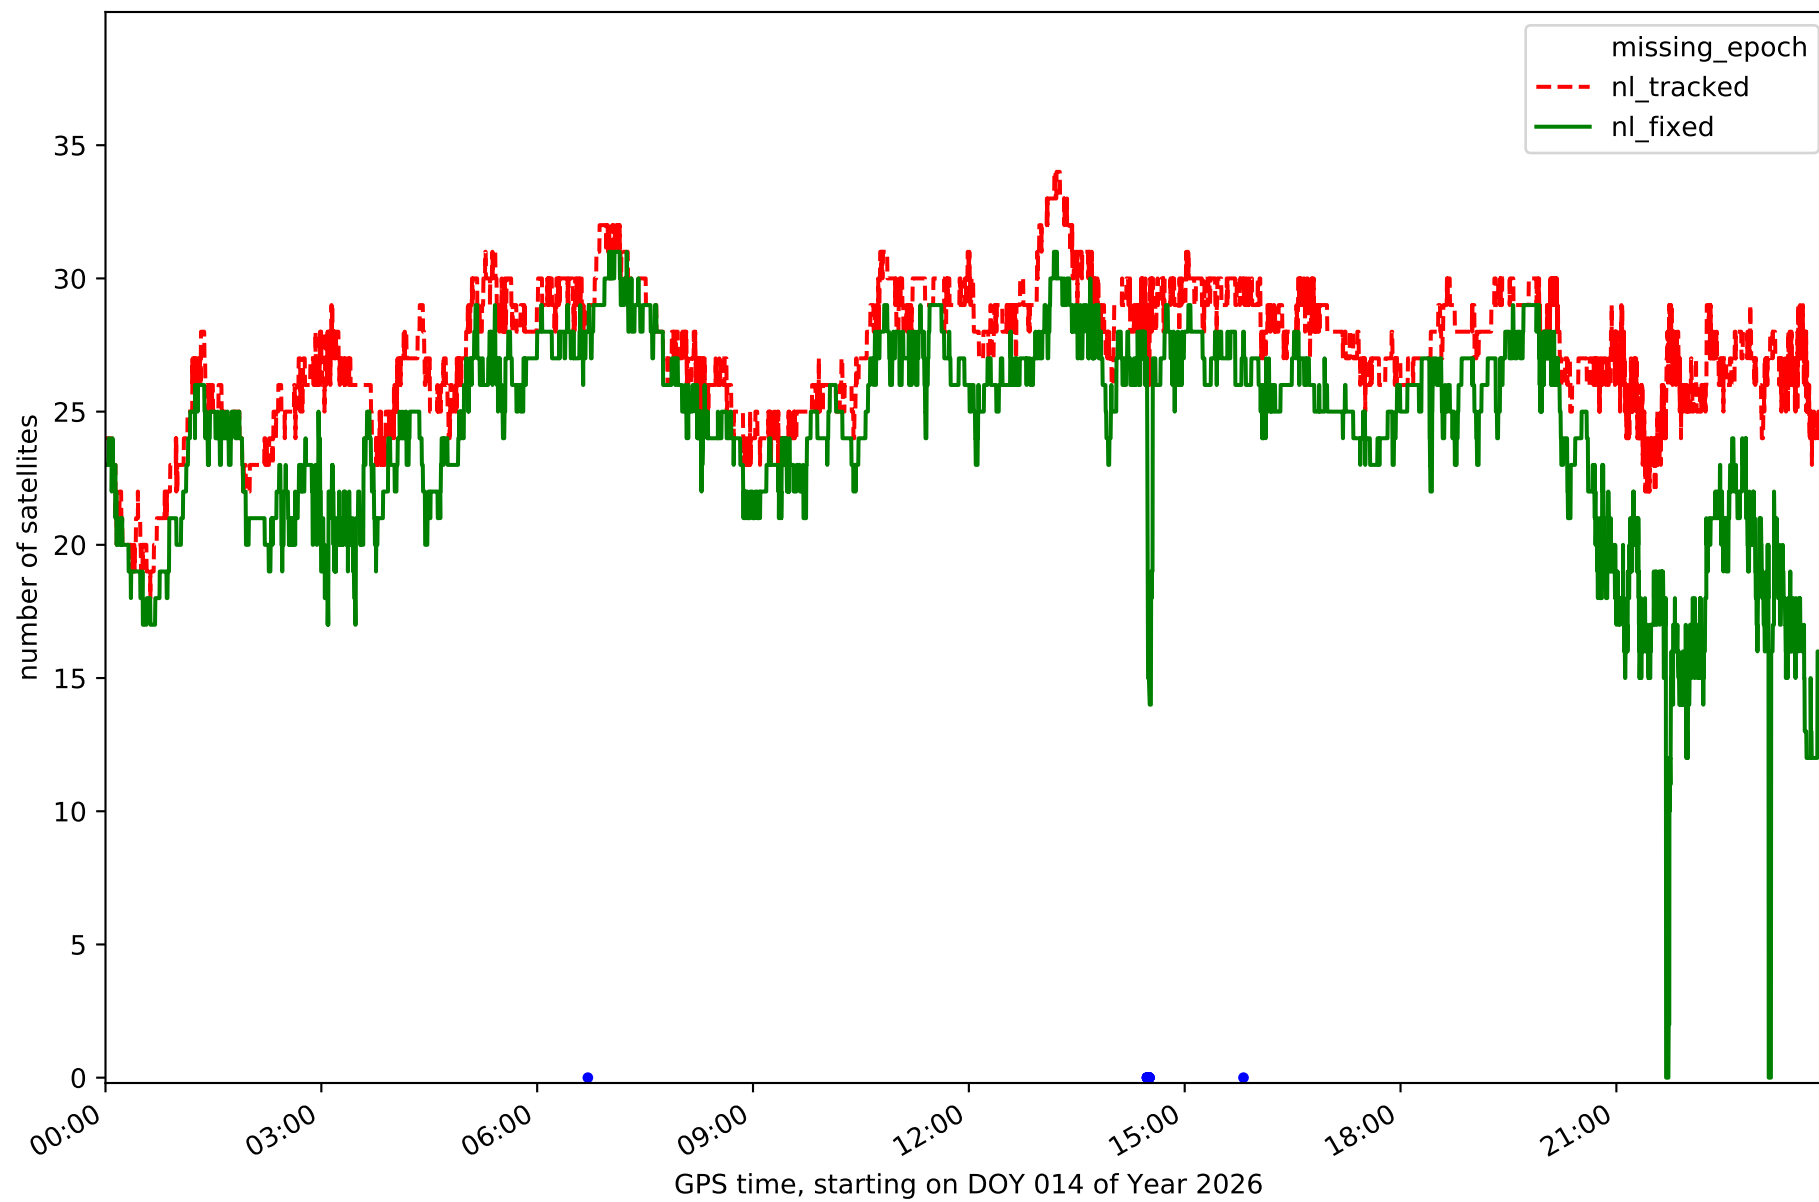


Station LP03 in network NT32

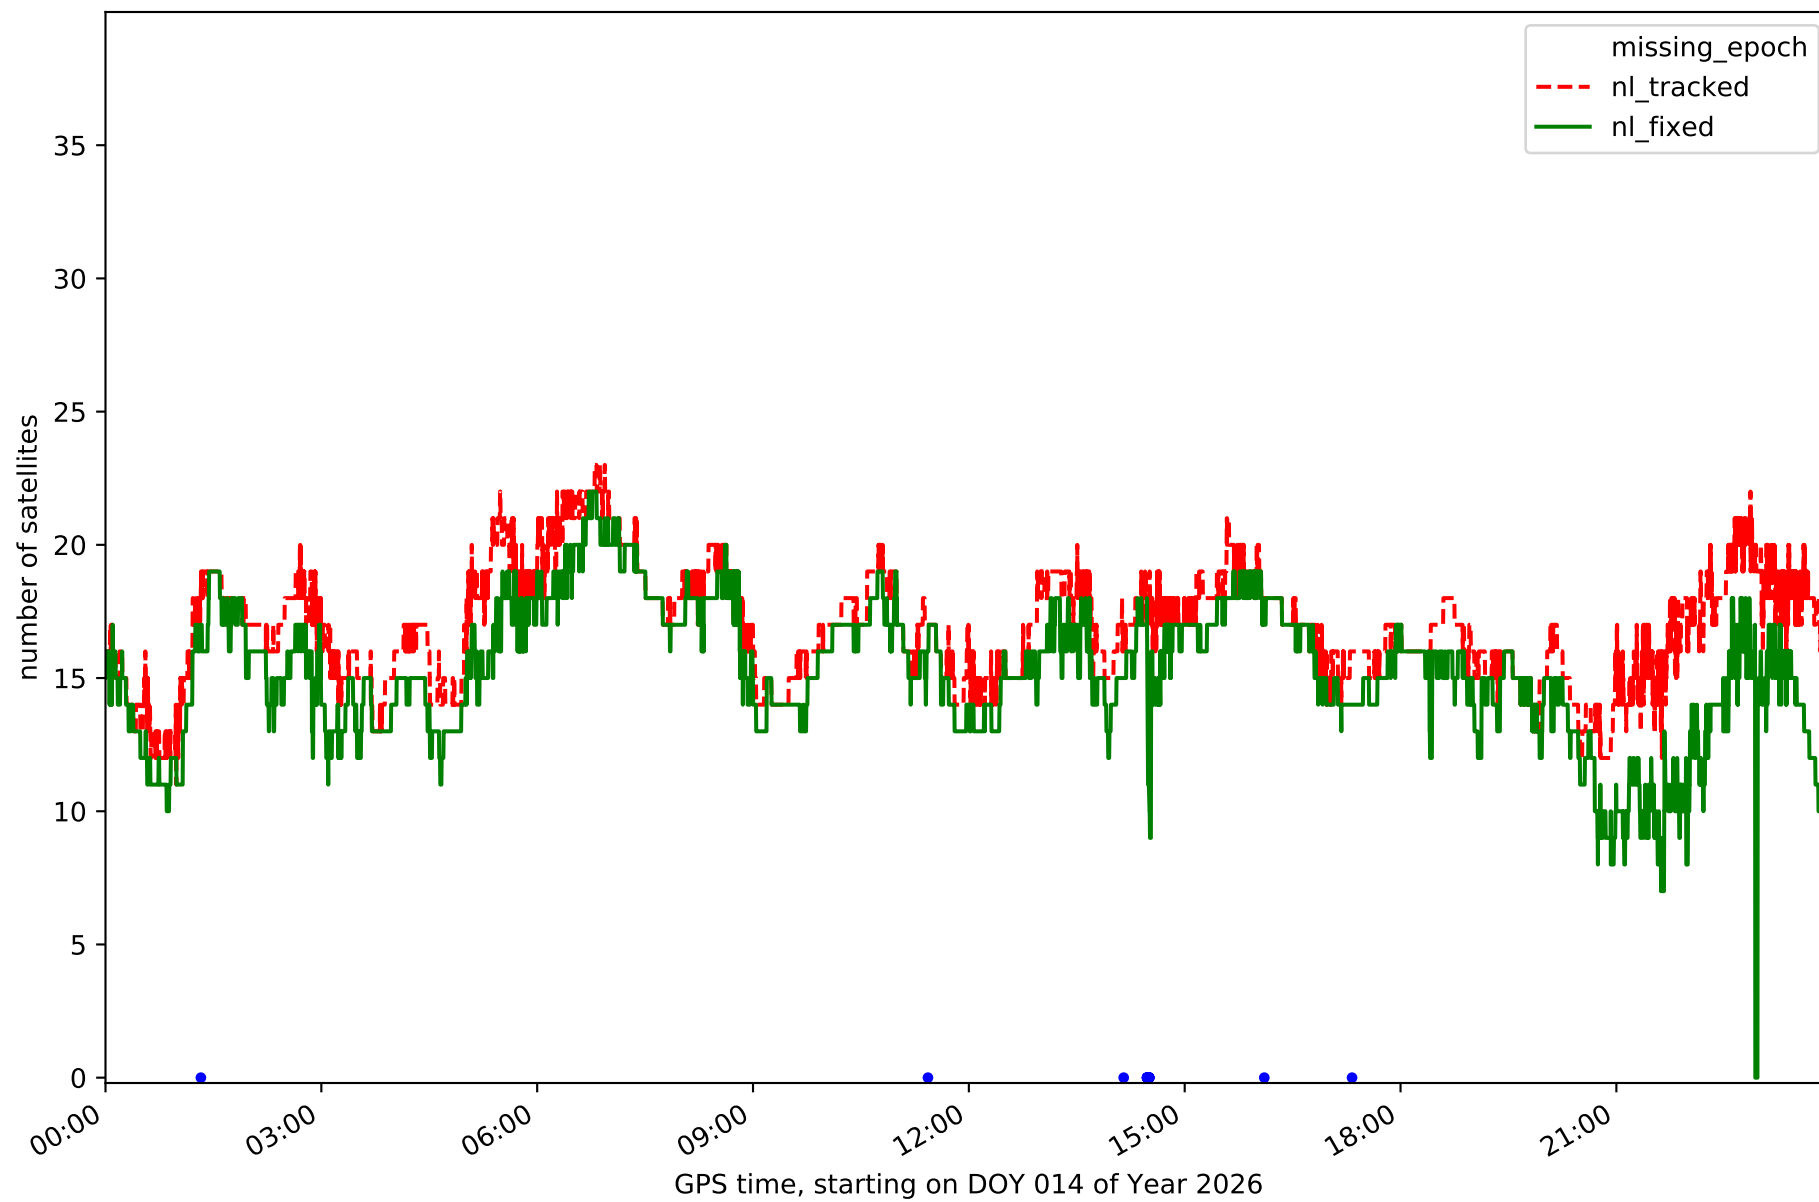


Station LPAL in network NT32

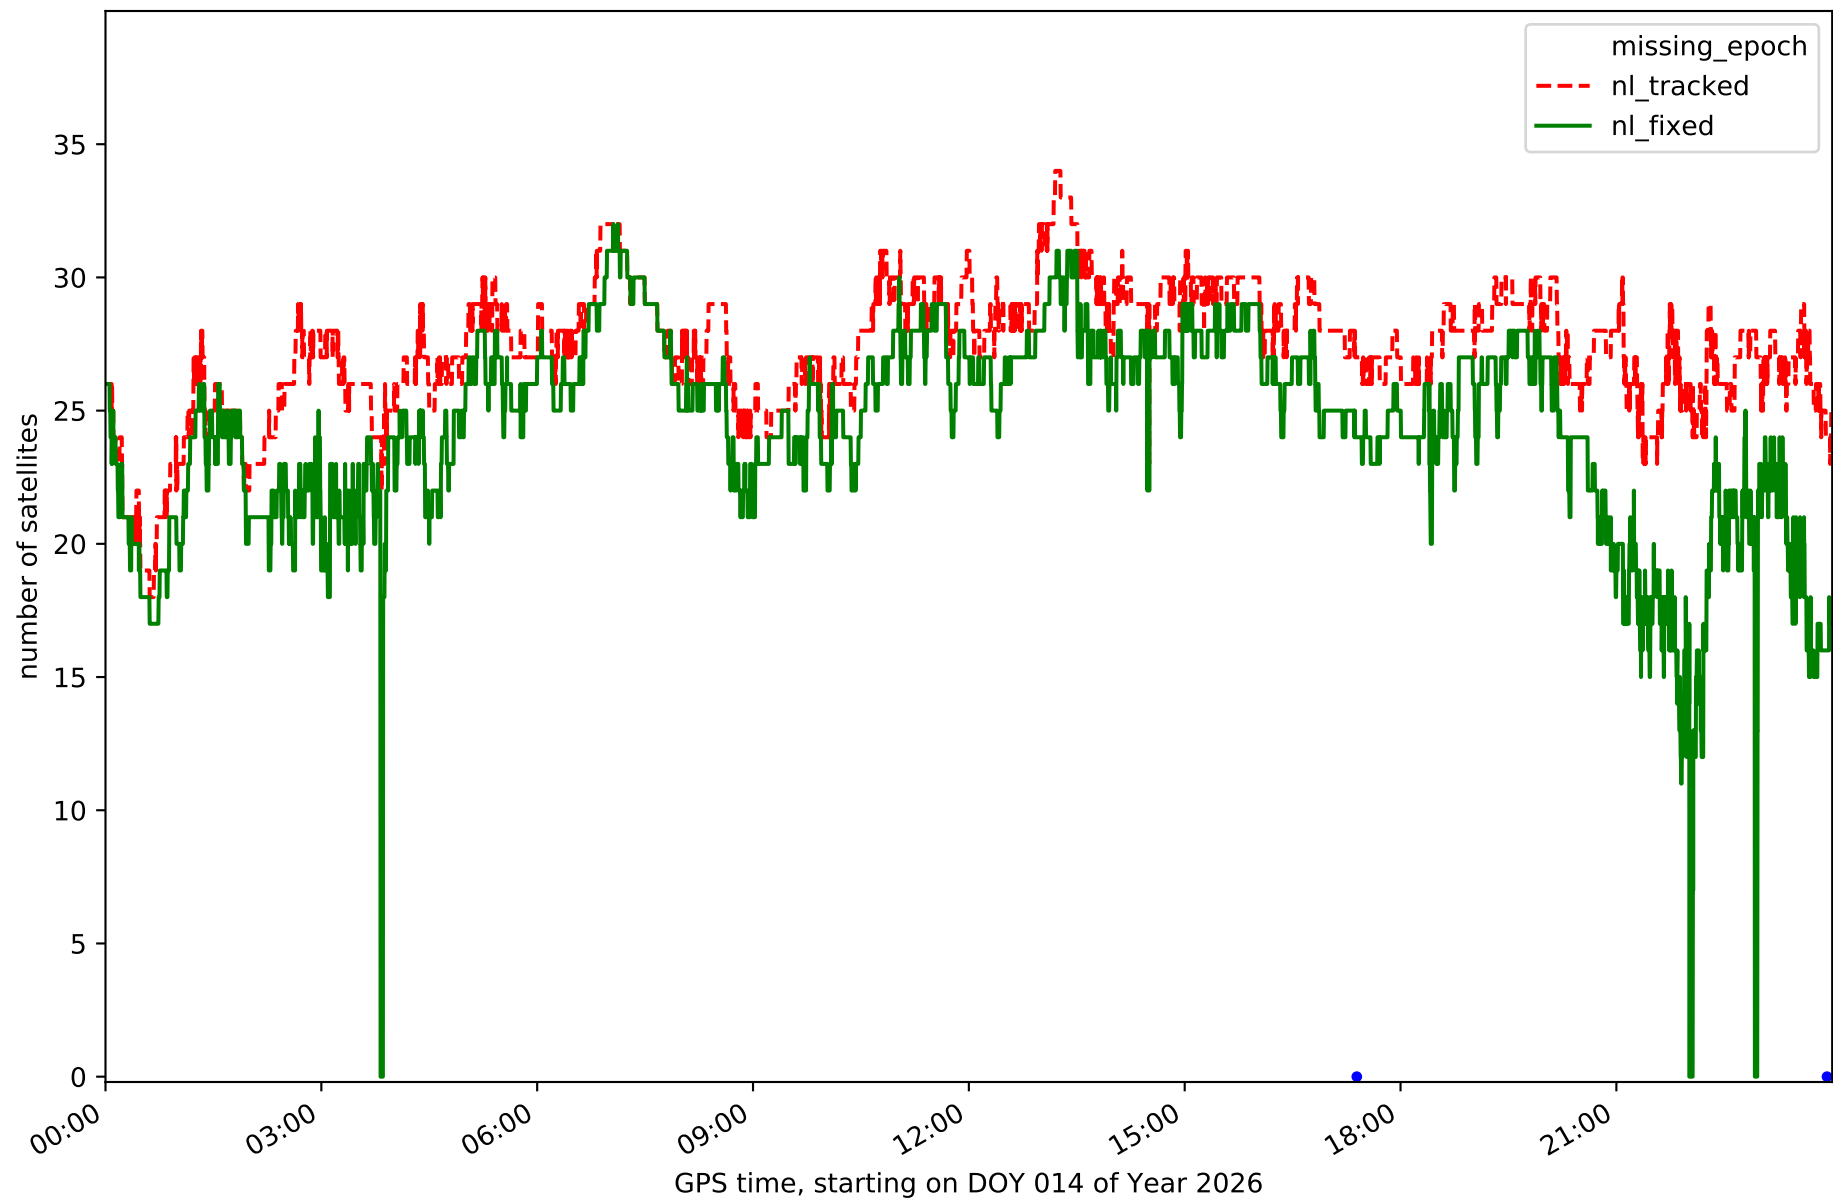


Station LRES in network NT32

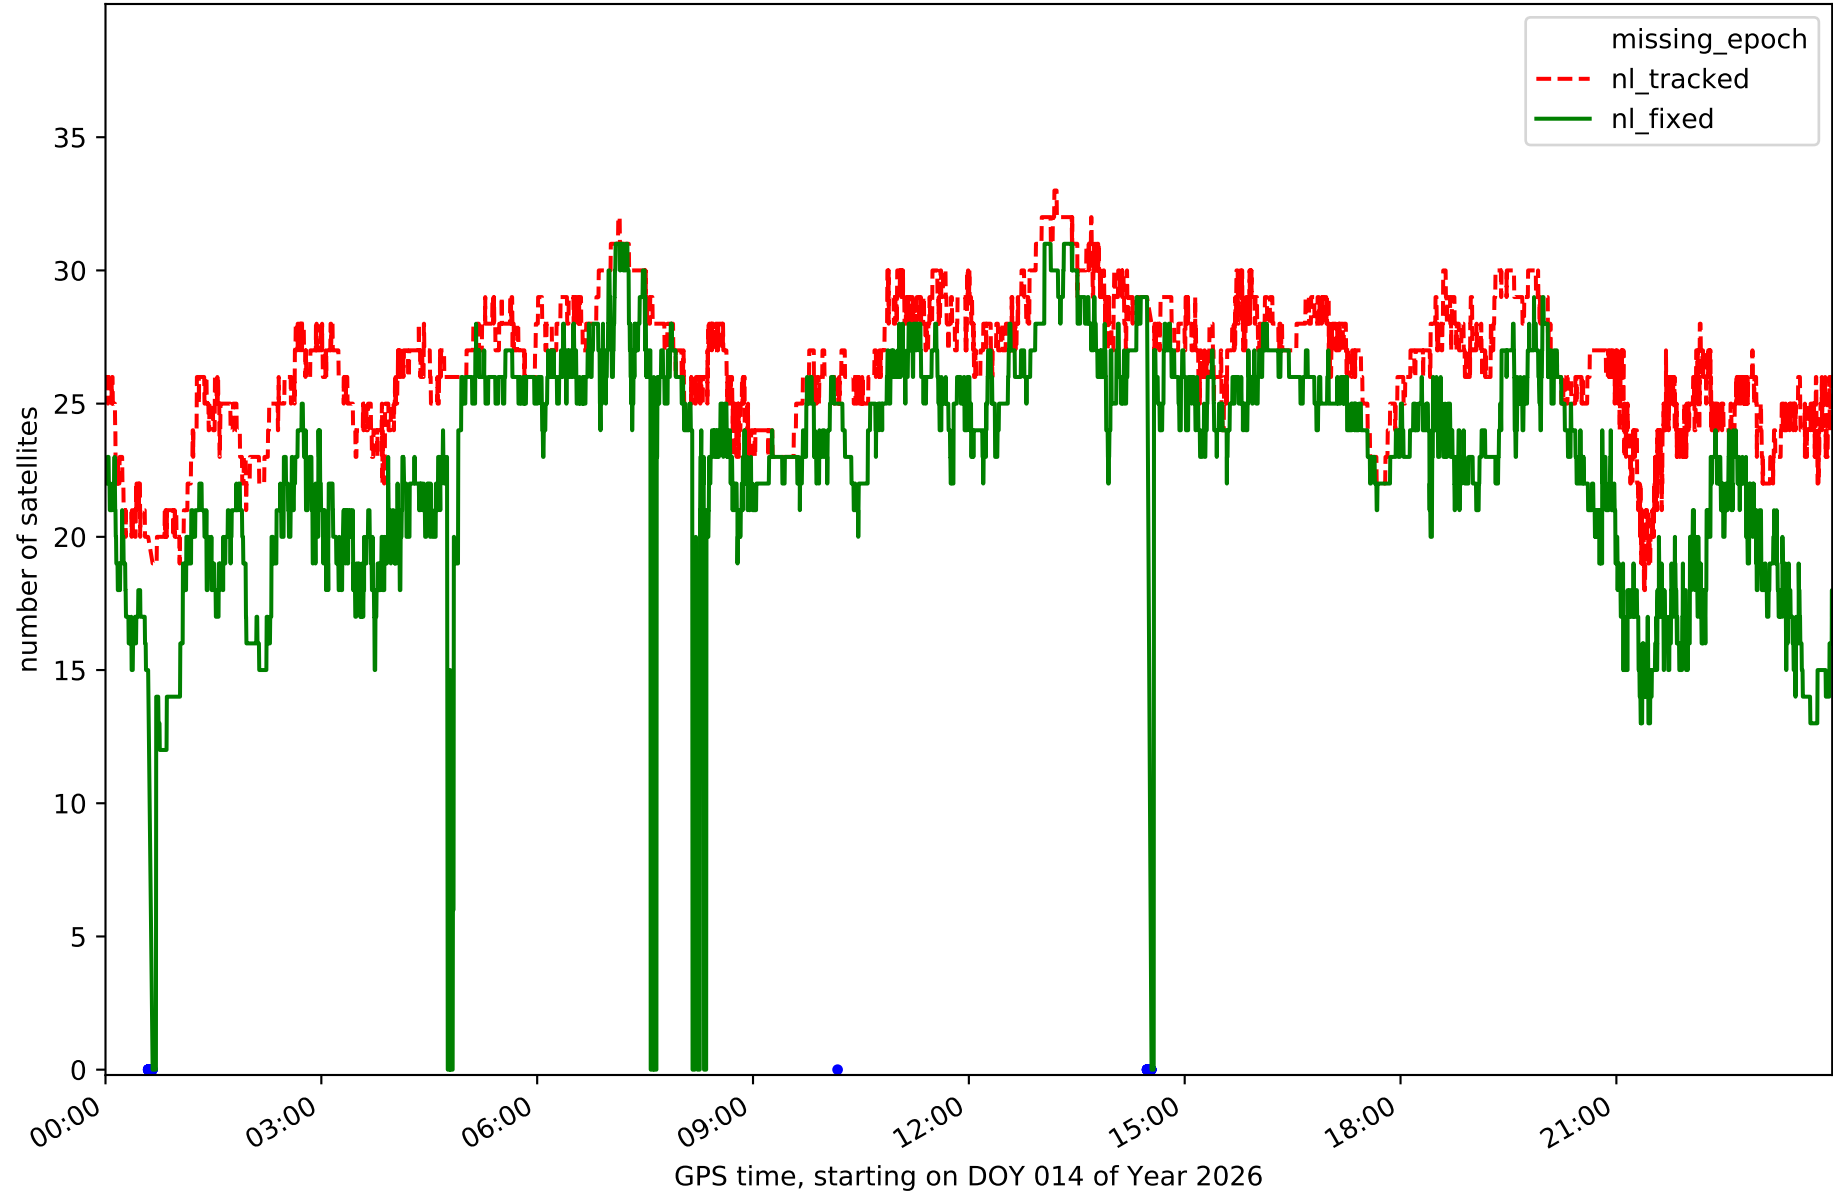


Station TN01 in network NT32

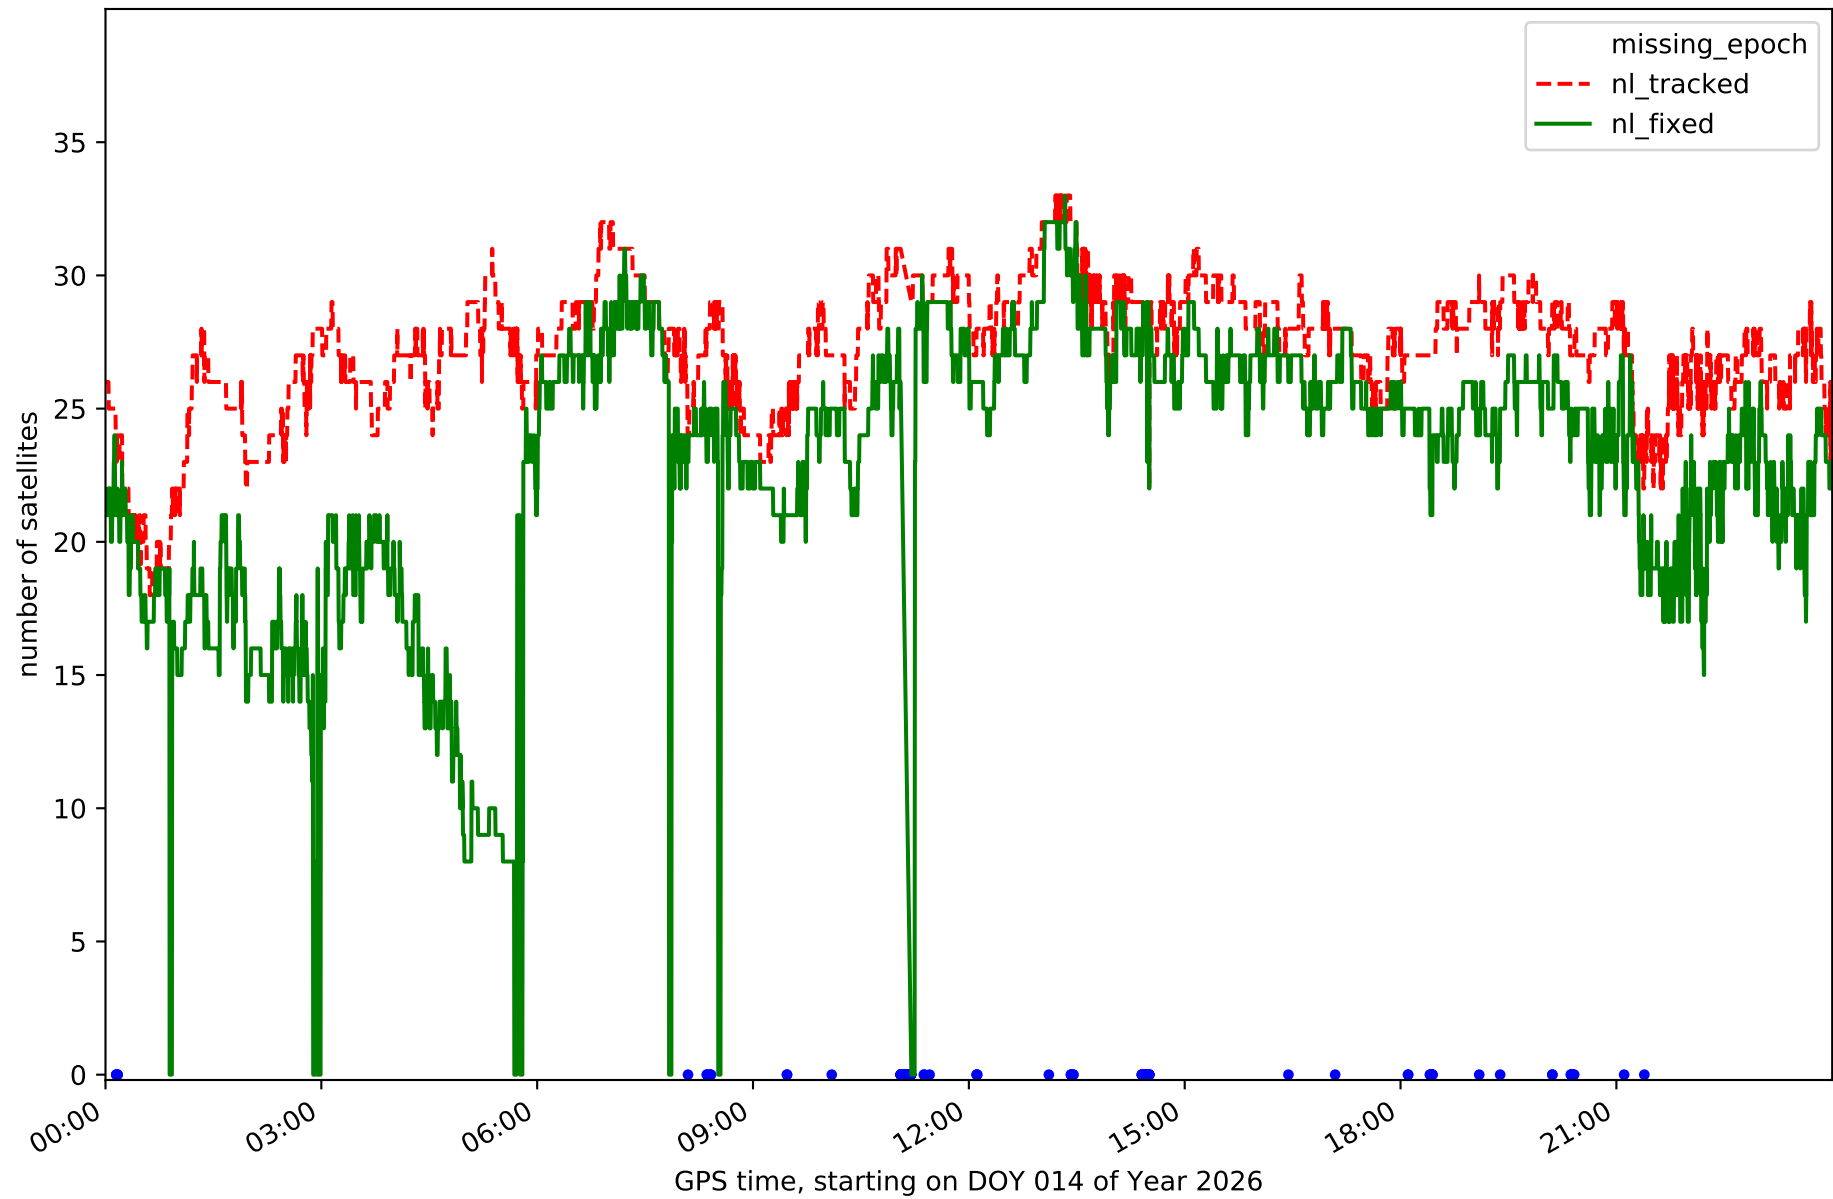


Station TN02 in network NT32

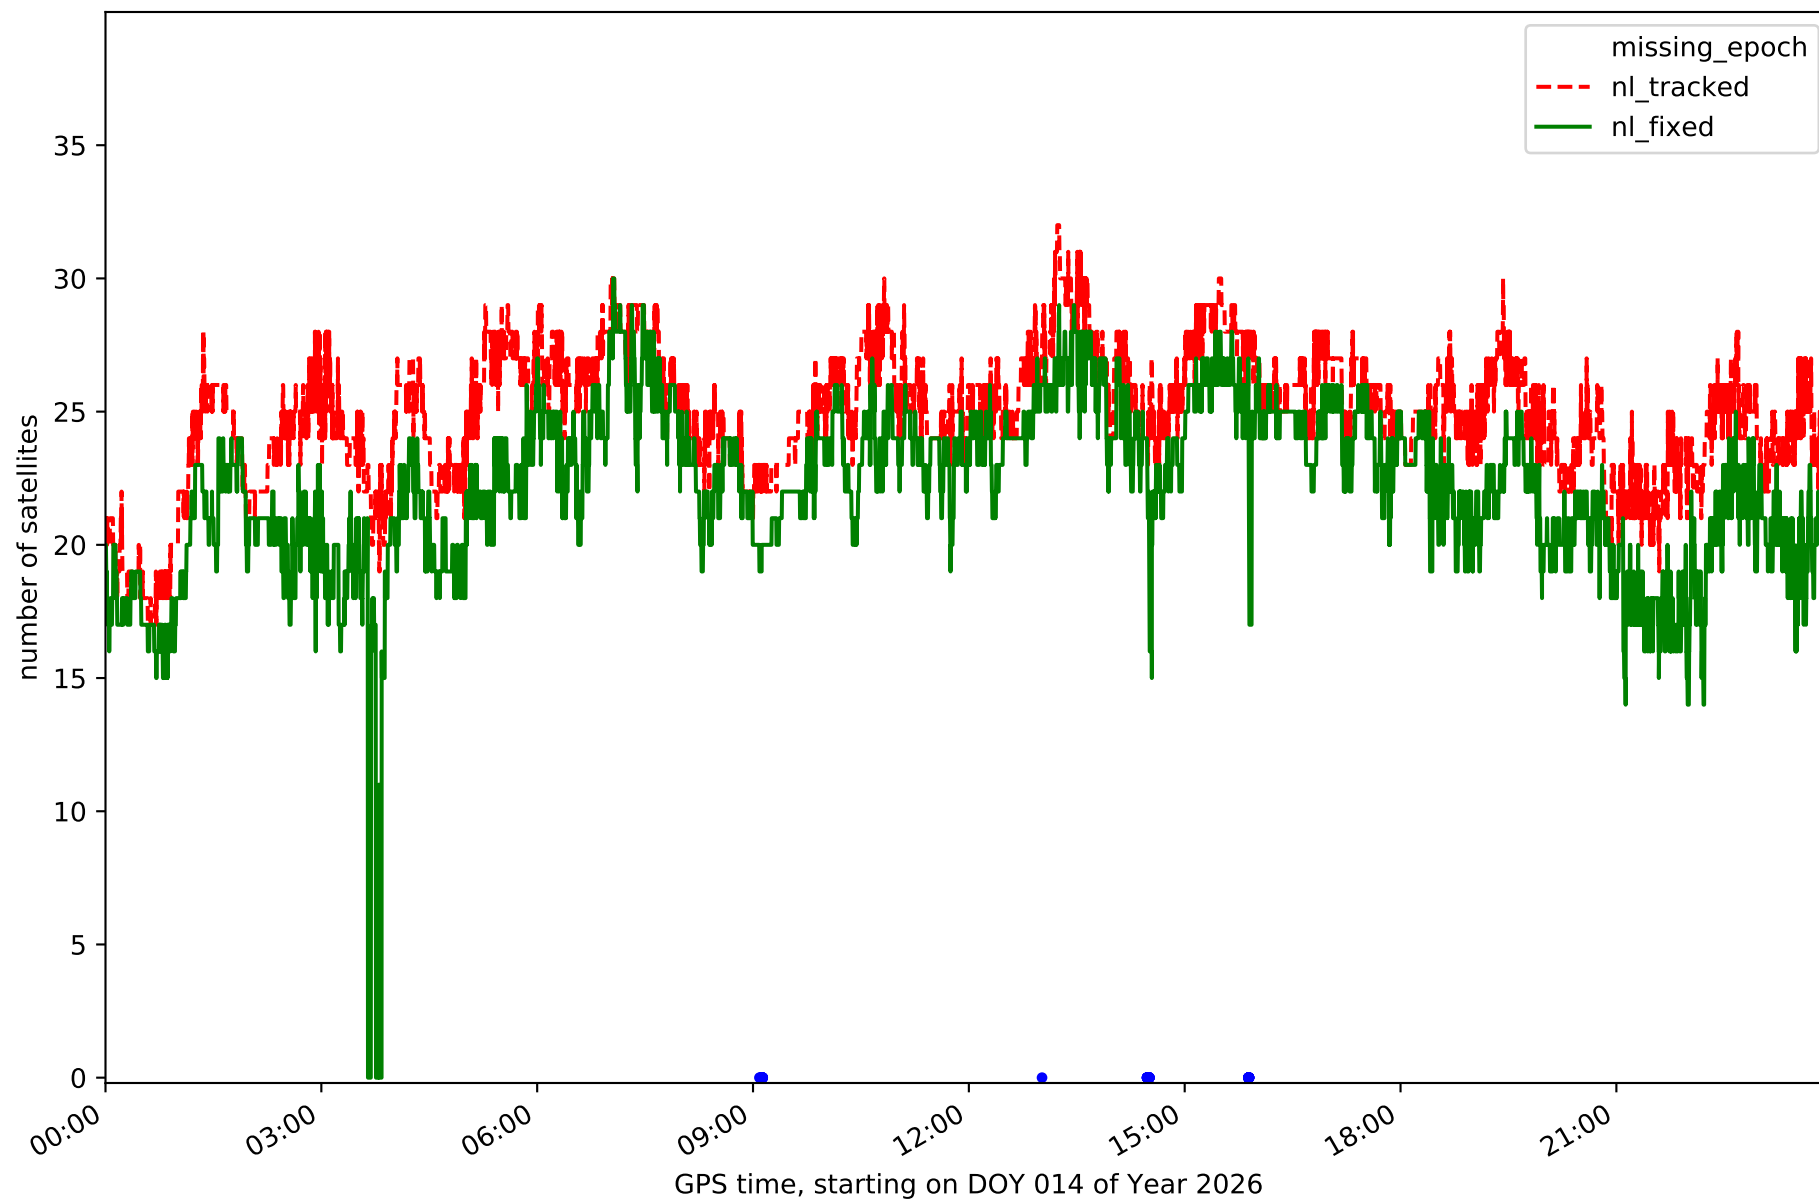


Station TN03 in network NT32

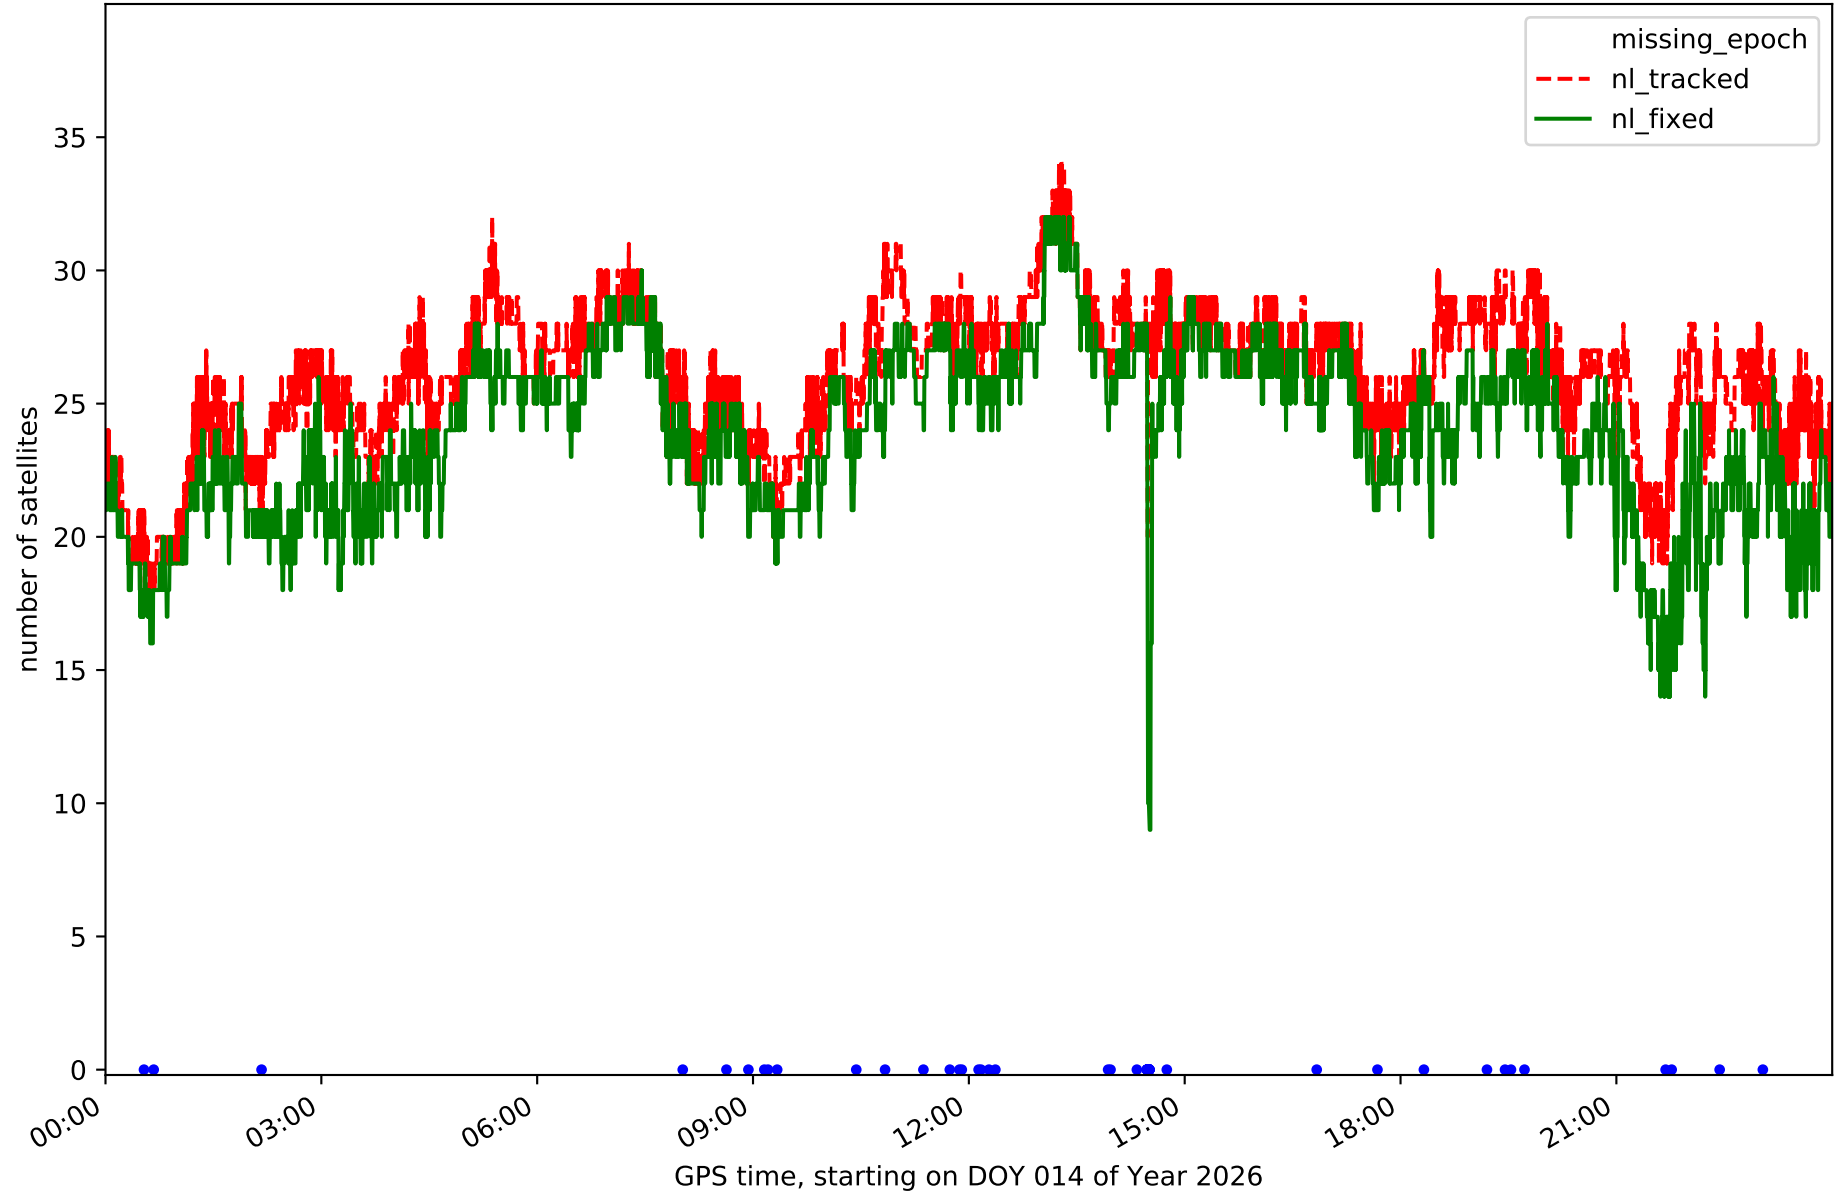


Station TN06 in network NT32

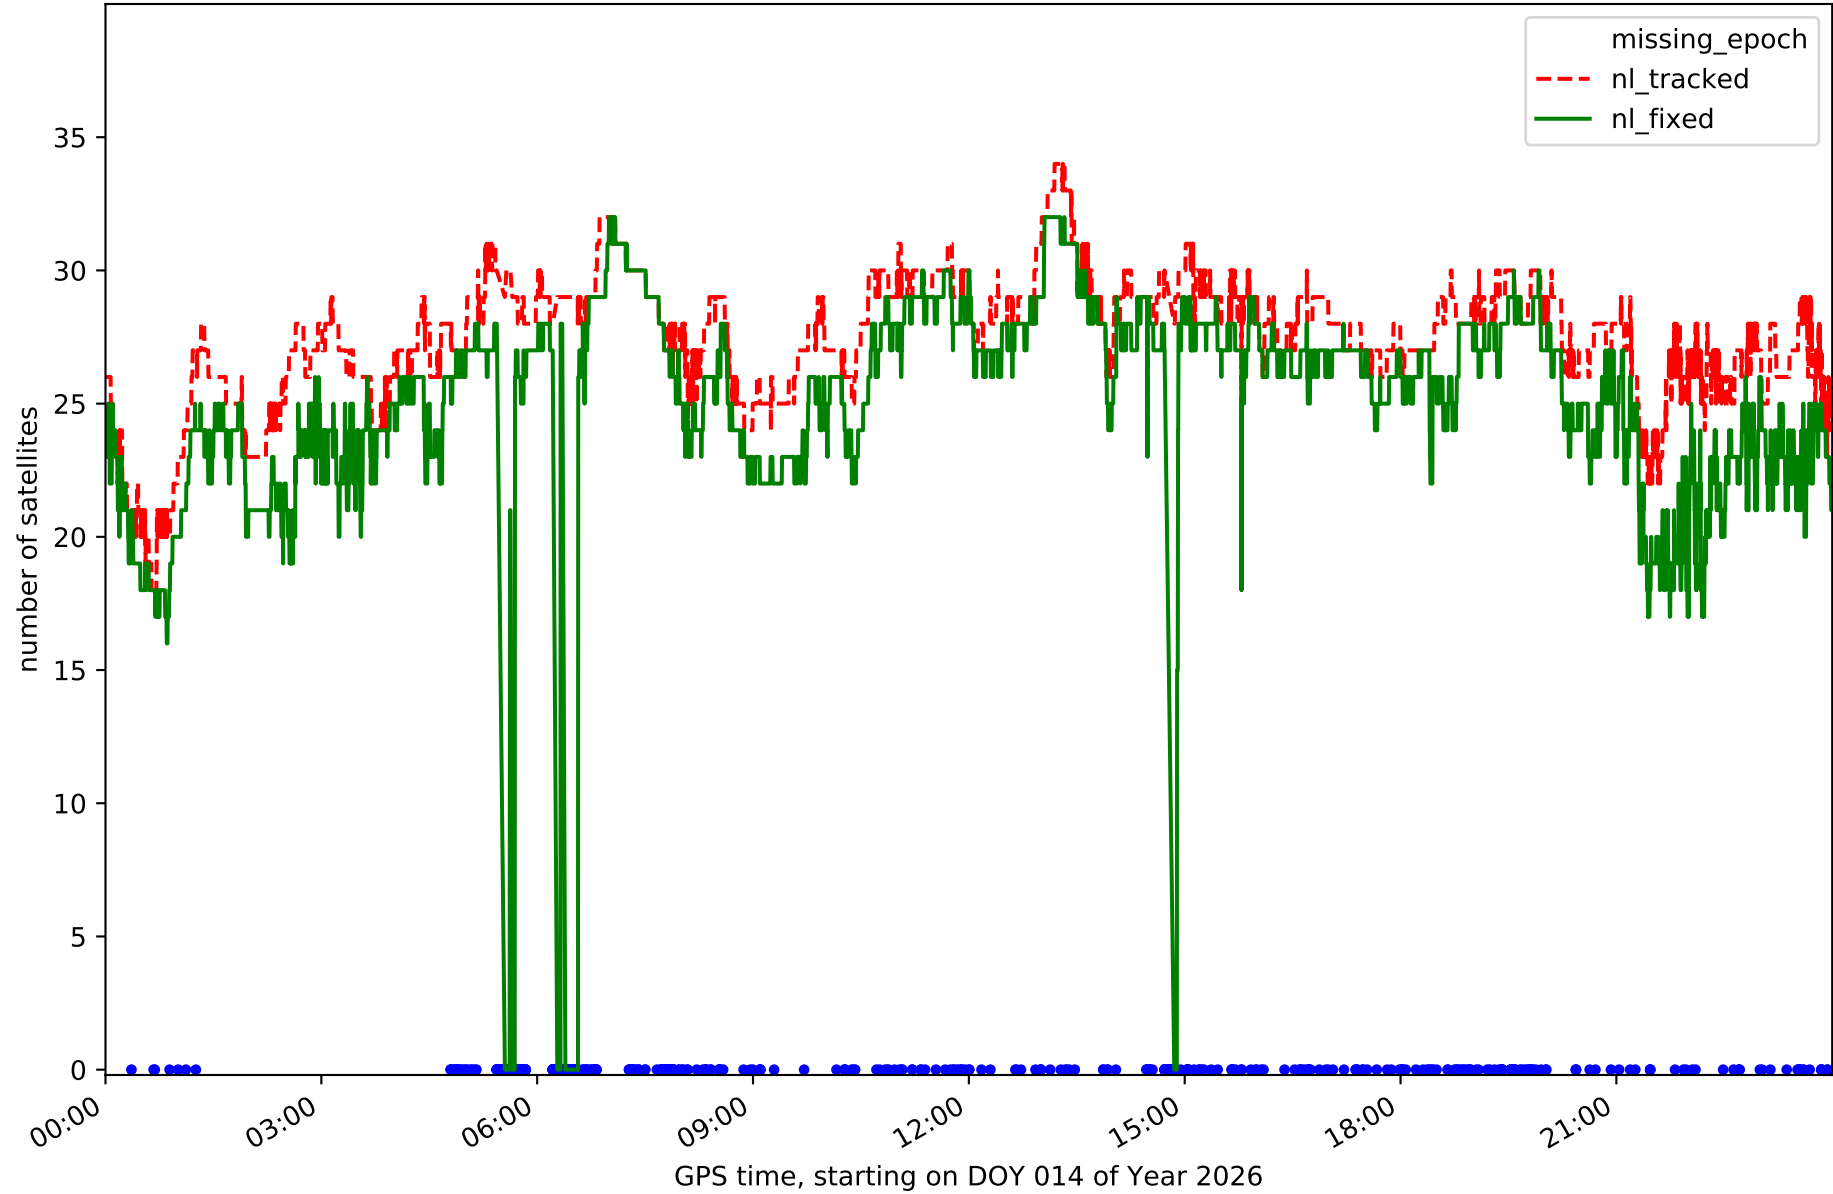


Station TN09 in network NT32

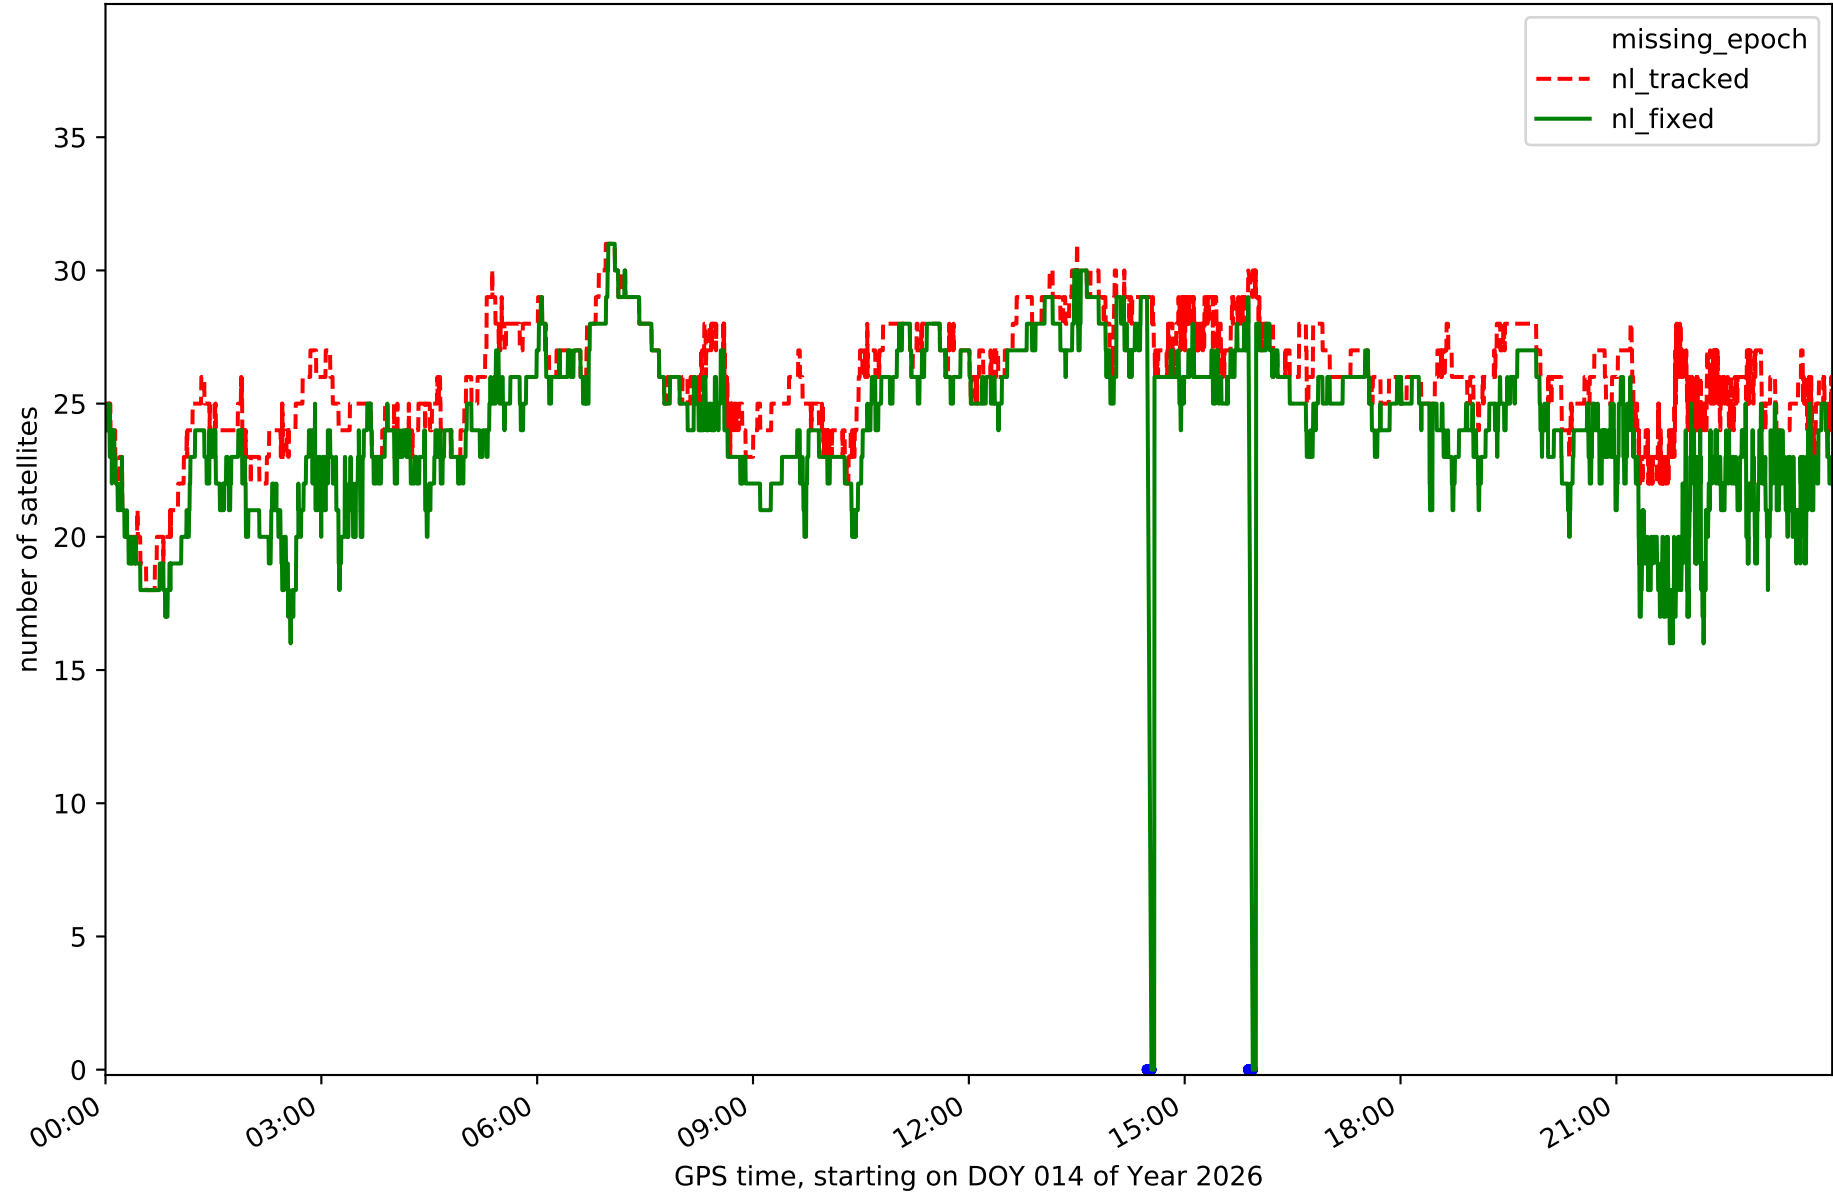


Station TE11 in network NT32

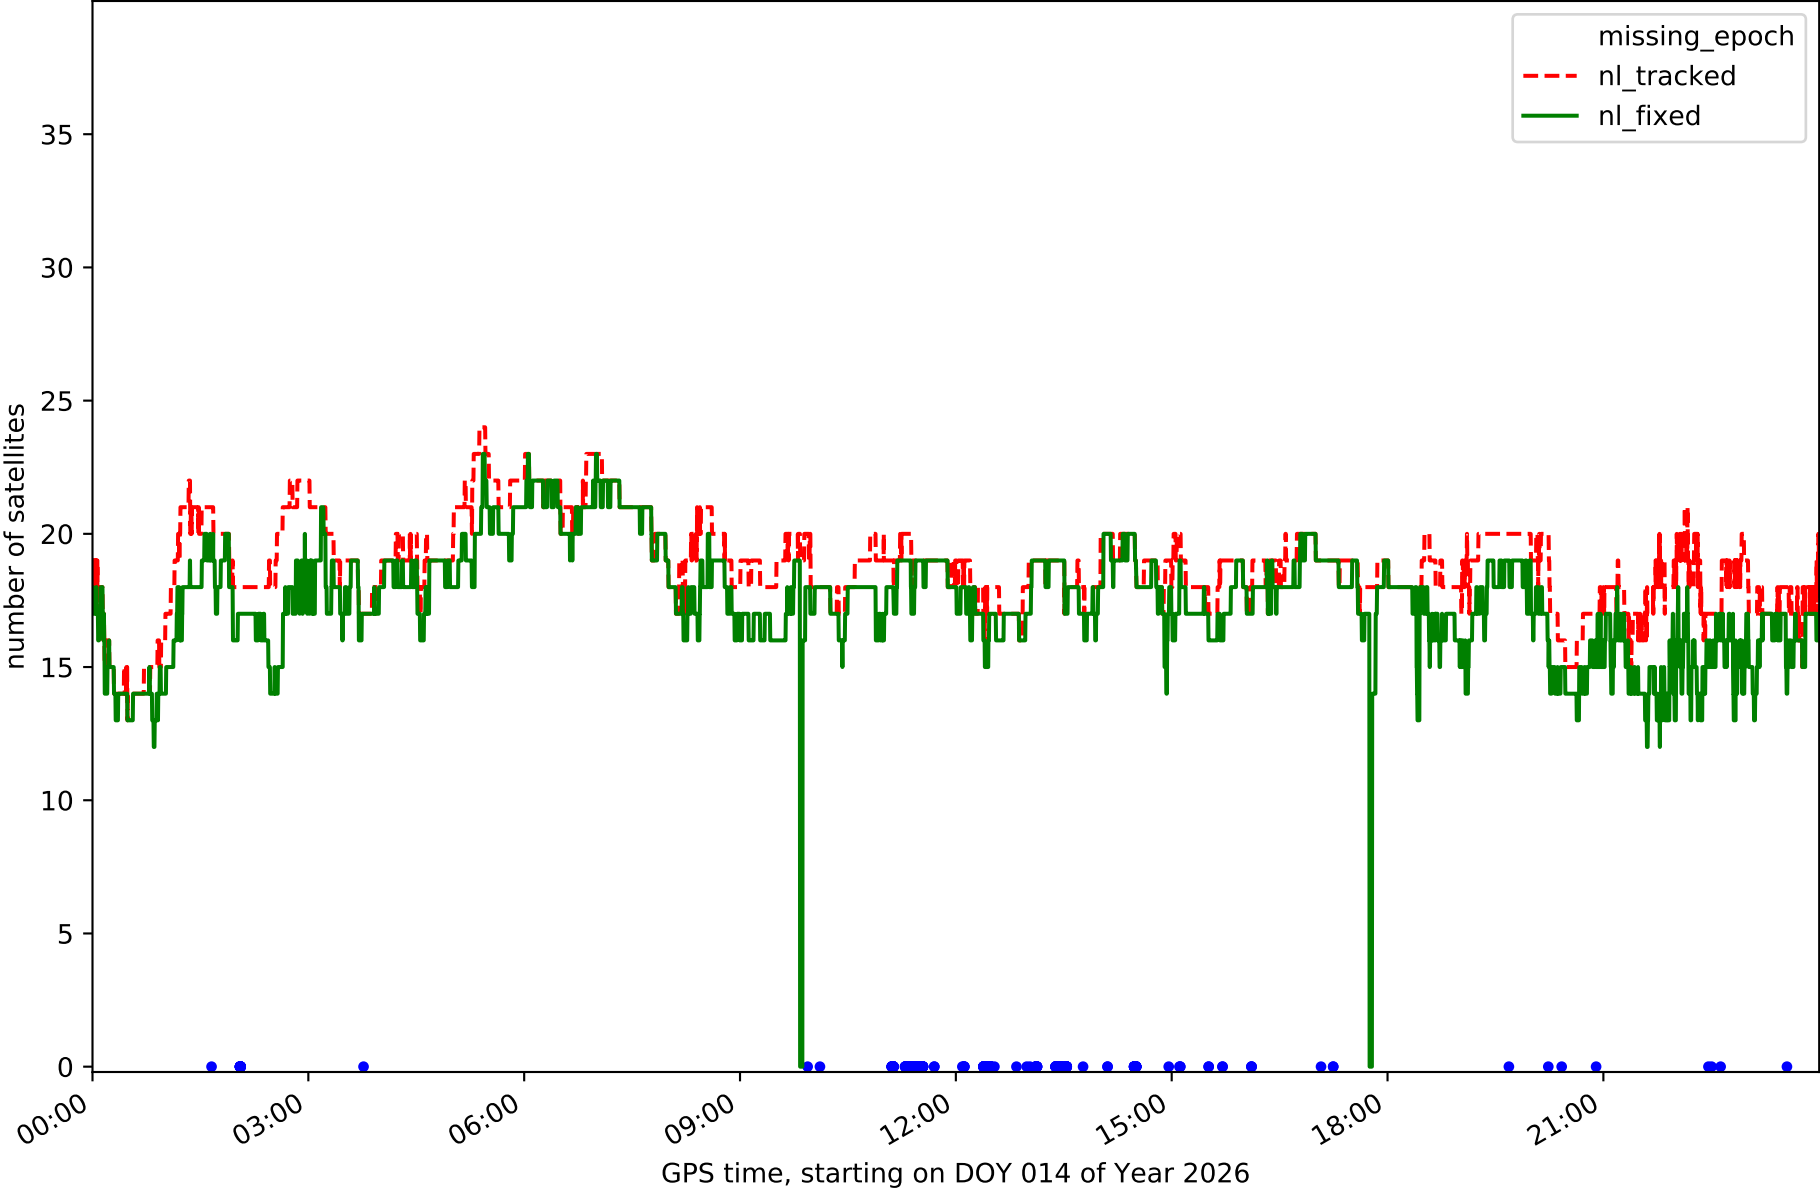


RefCheck for station EH01 in network NT32

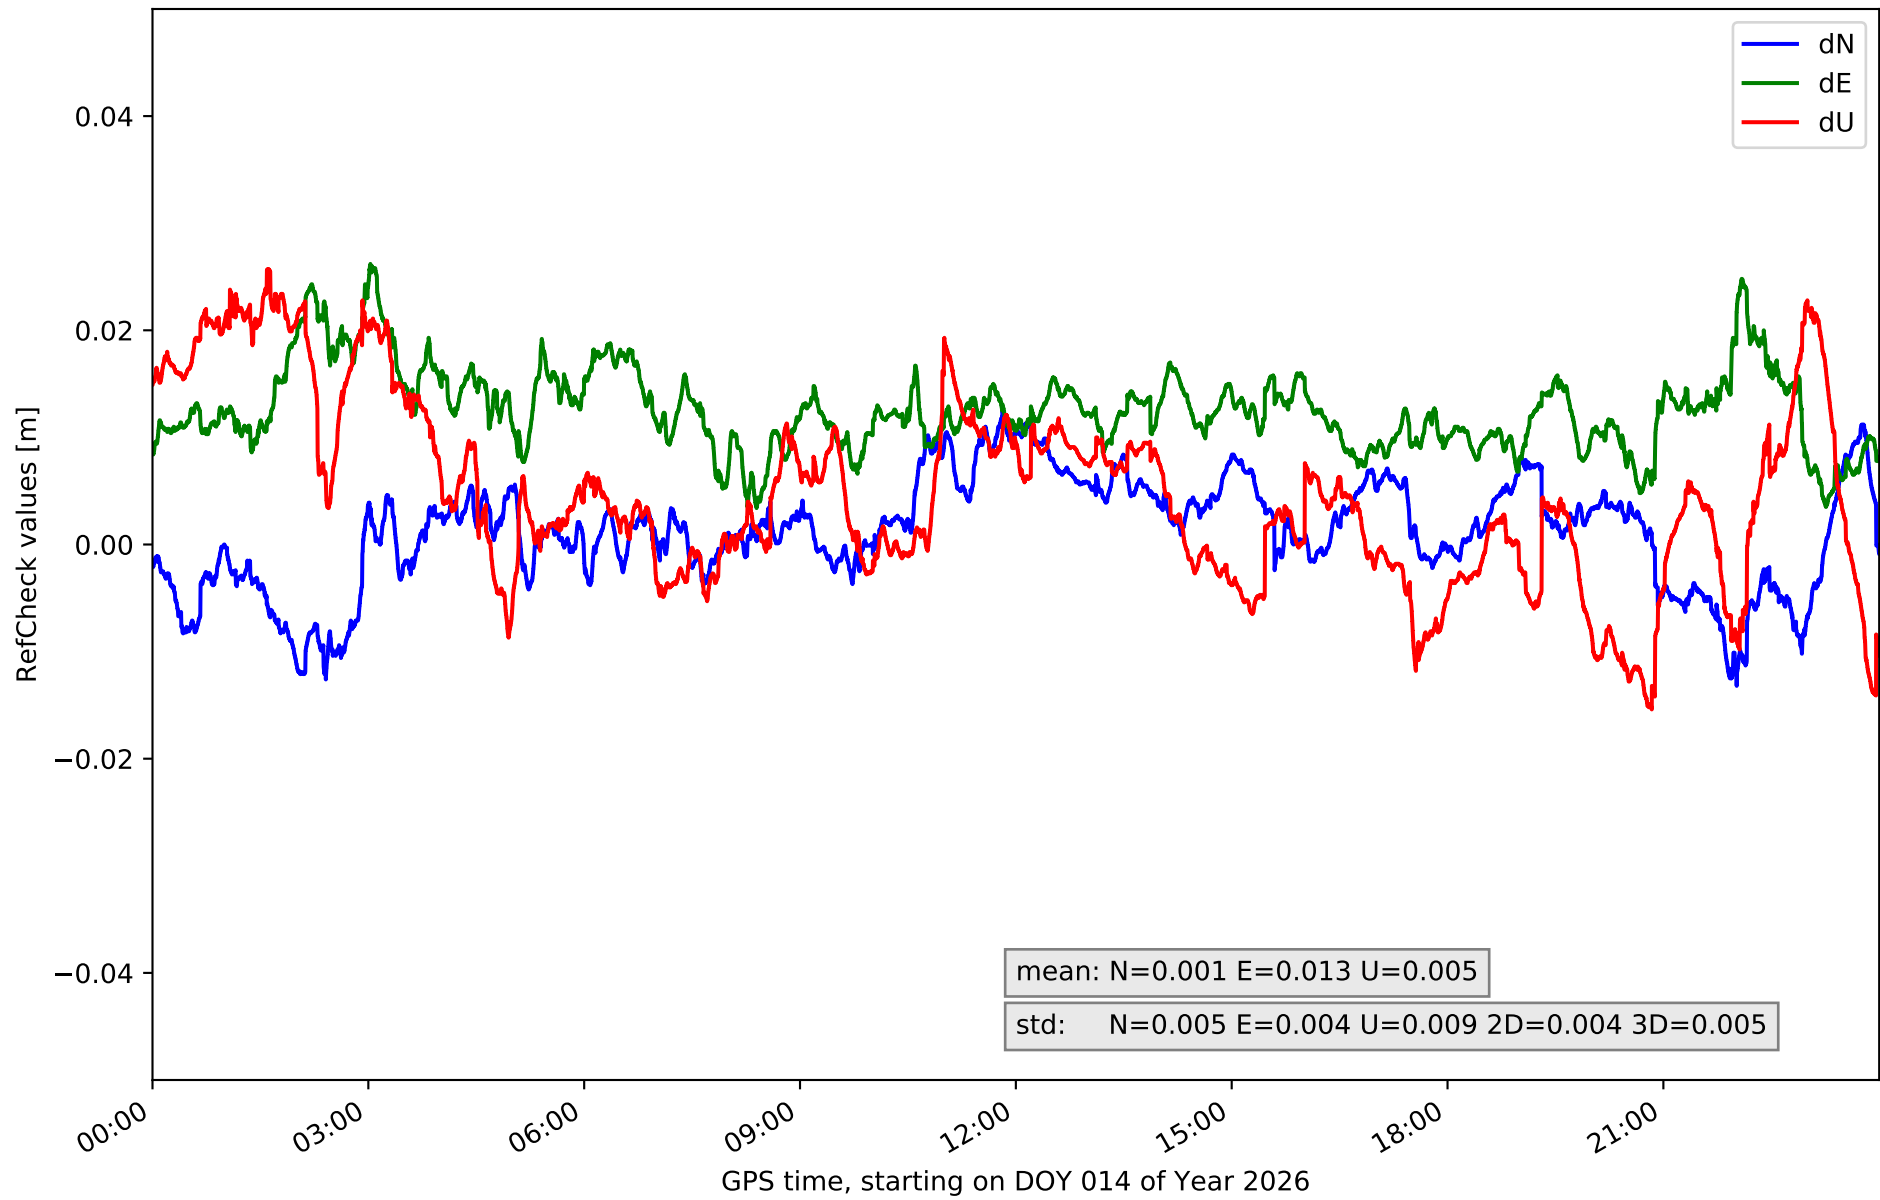


RefCheck for station EH02 in network NT32

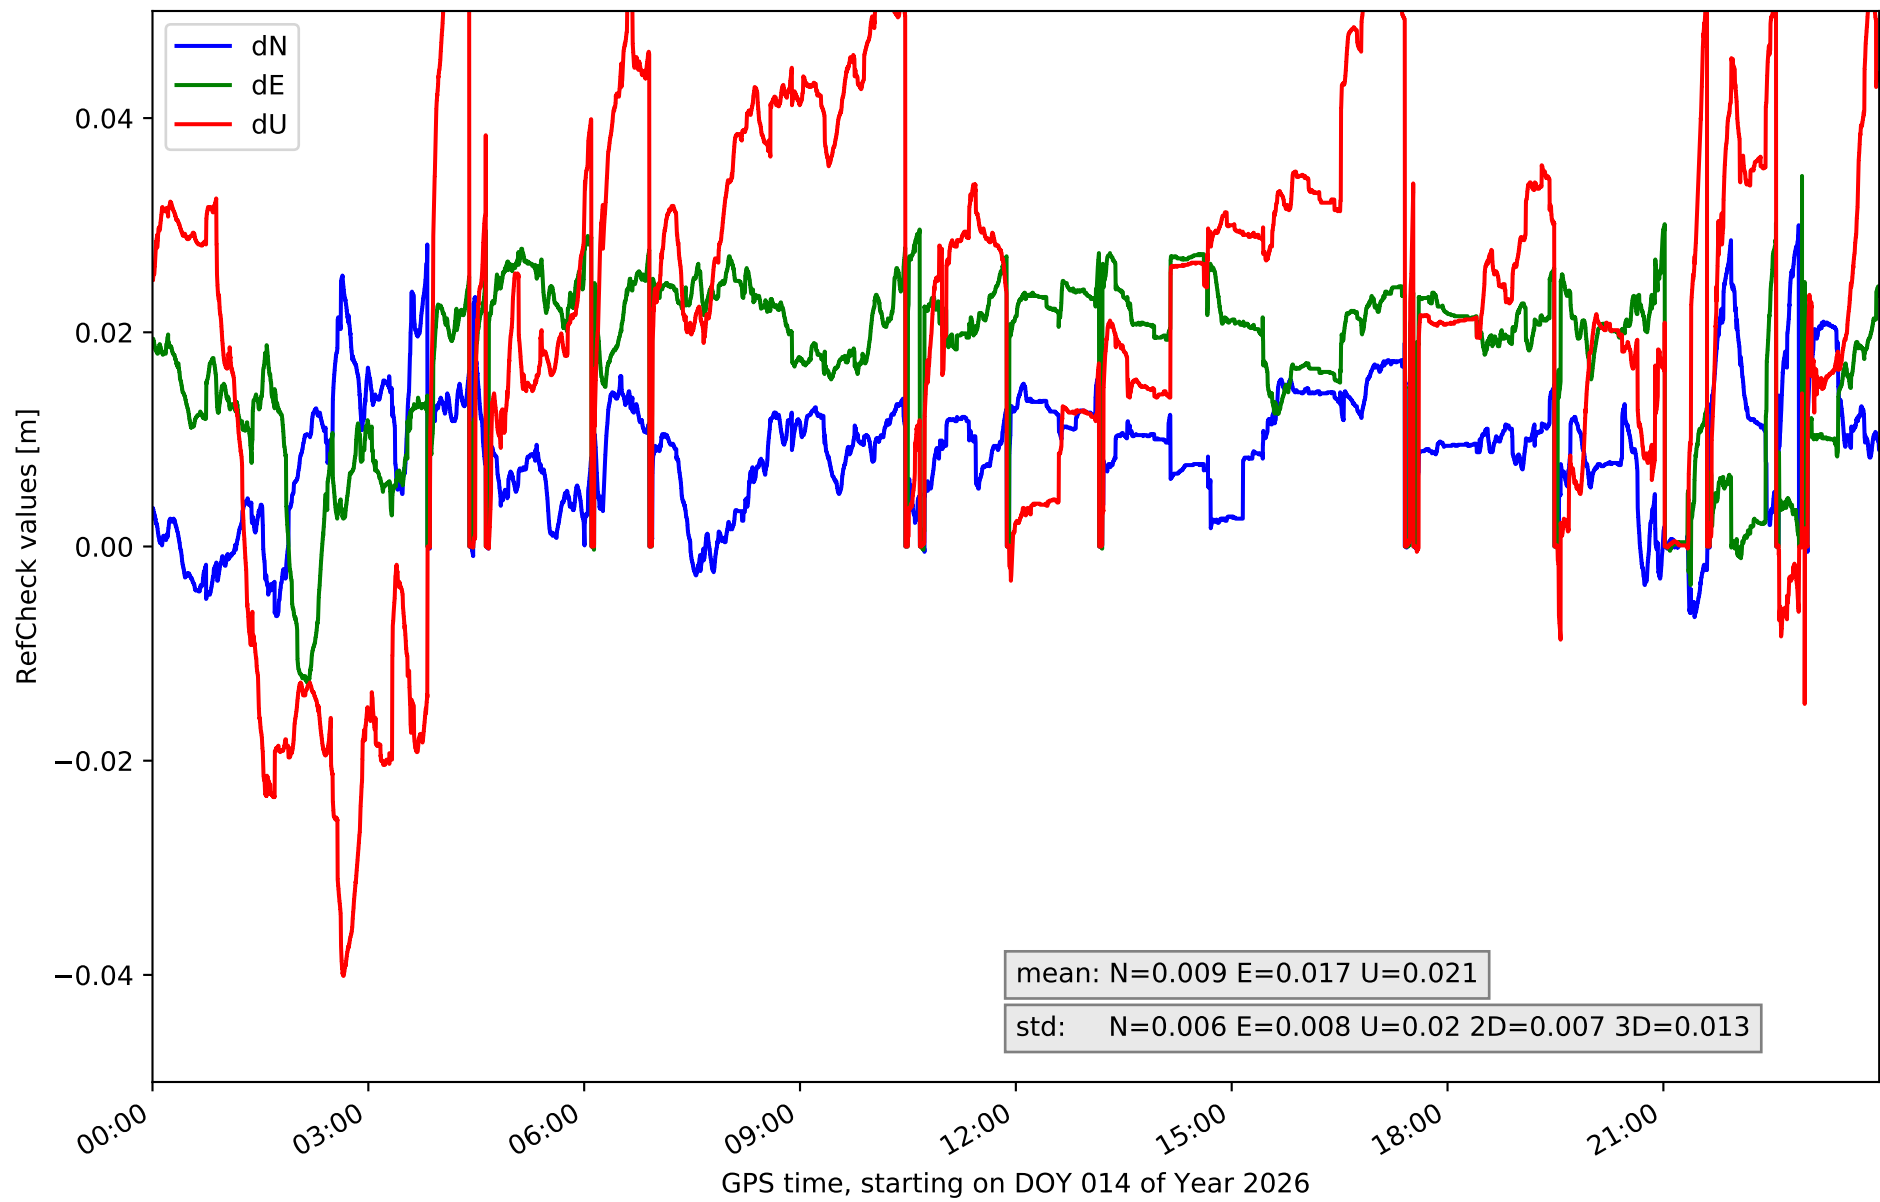


RefCheck for station GOM1 in network NT32

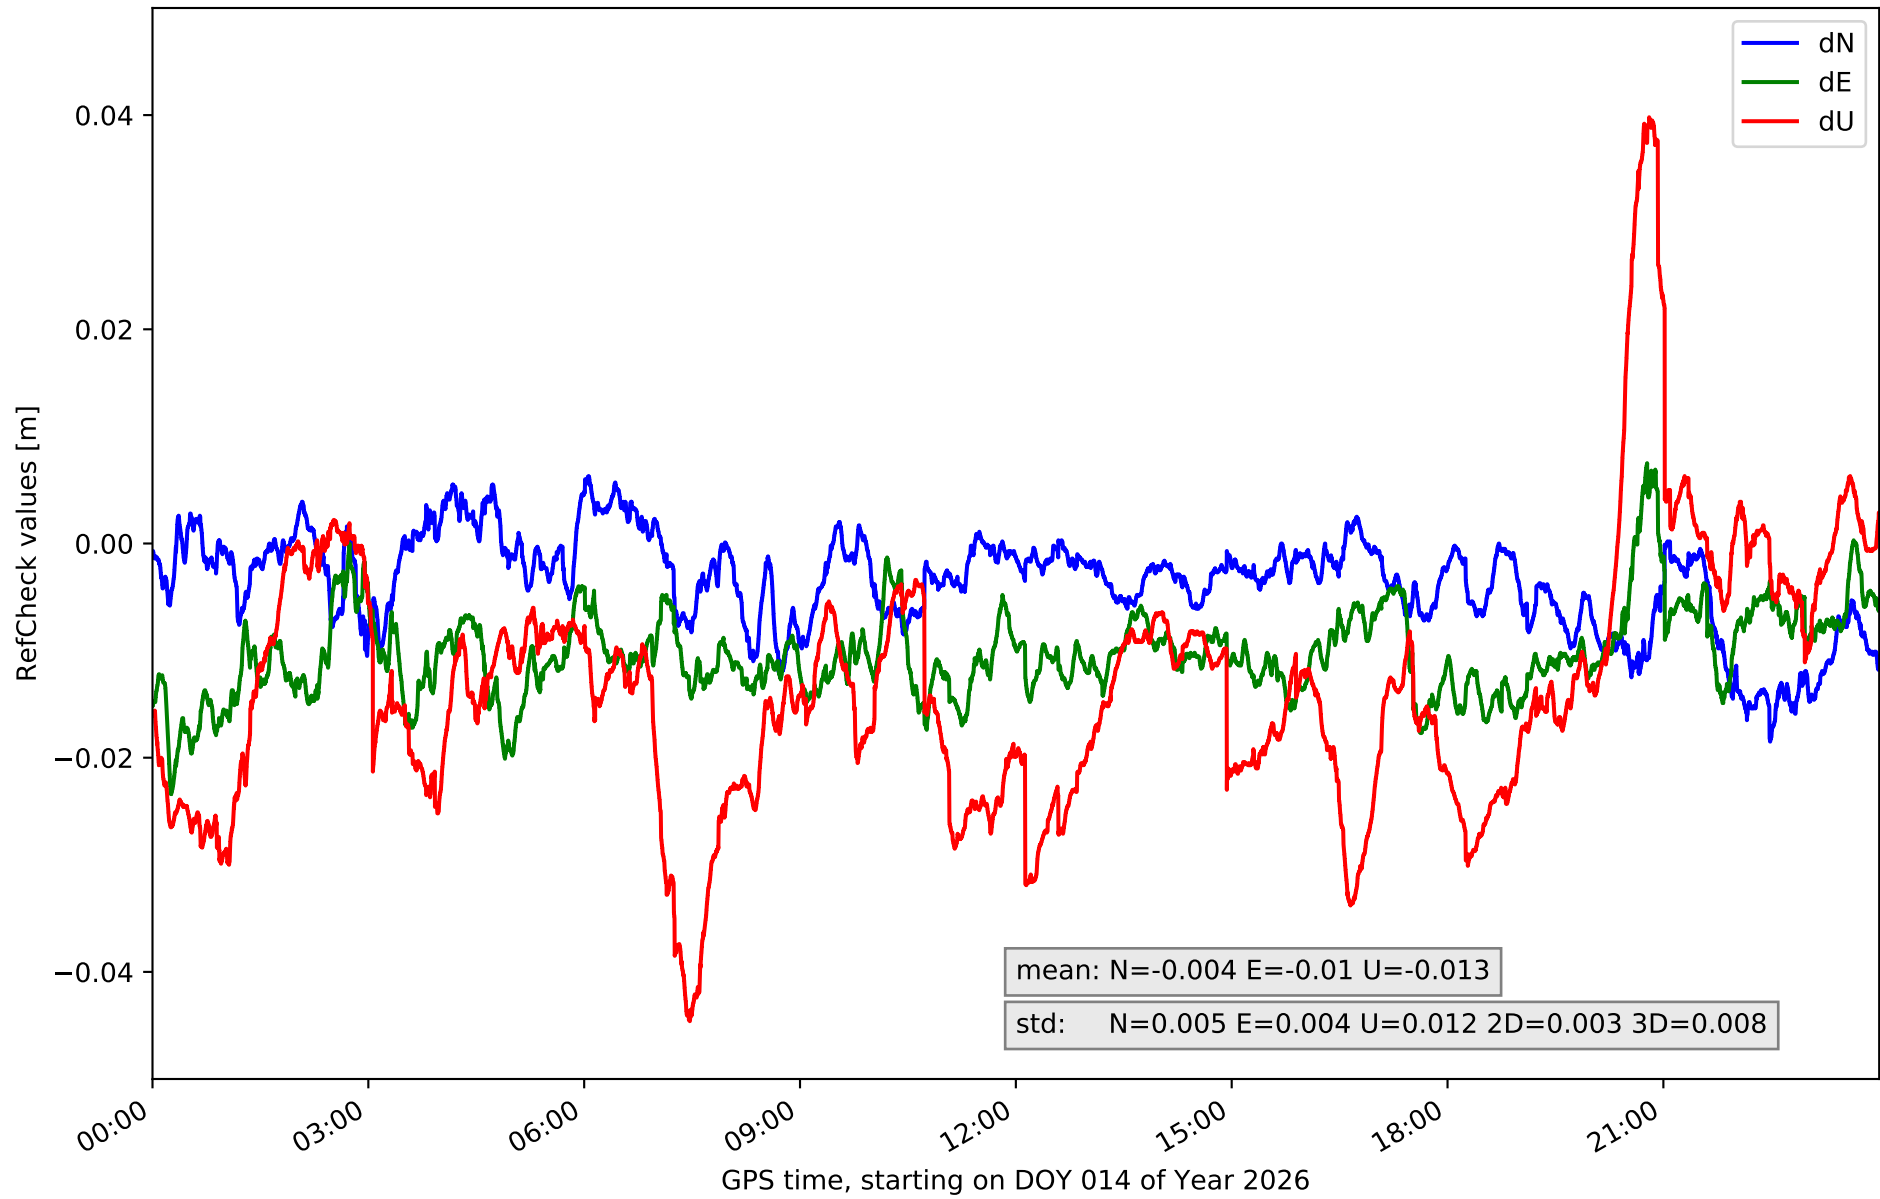


RefCheck for station GOME in network NT32

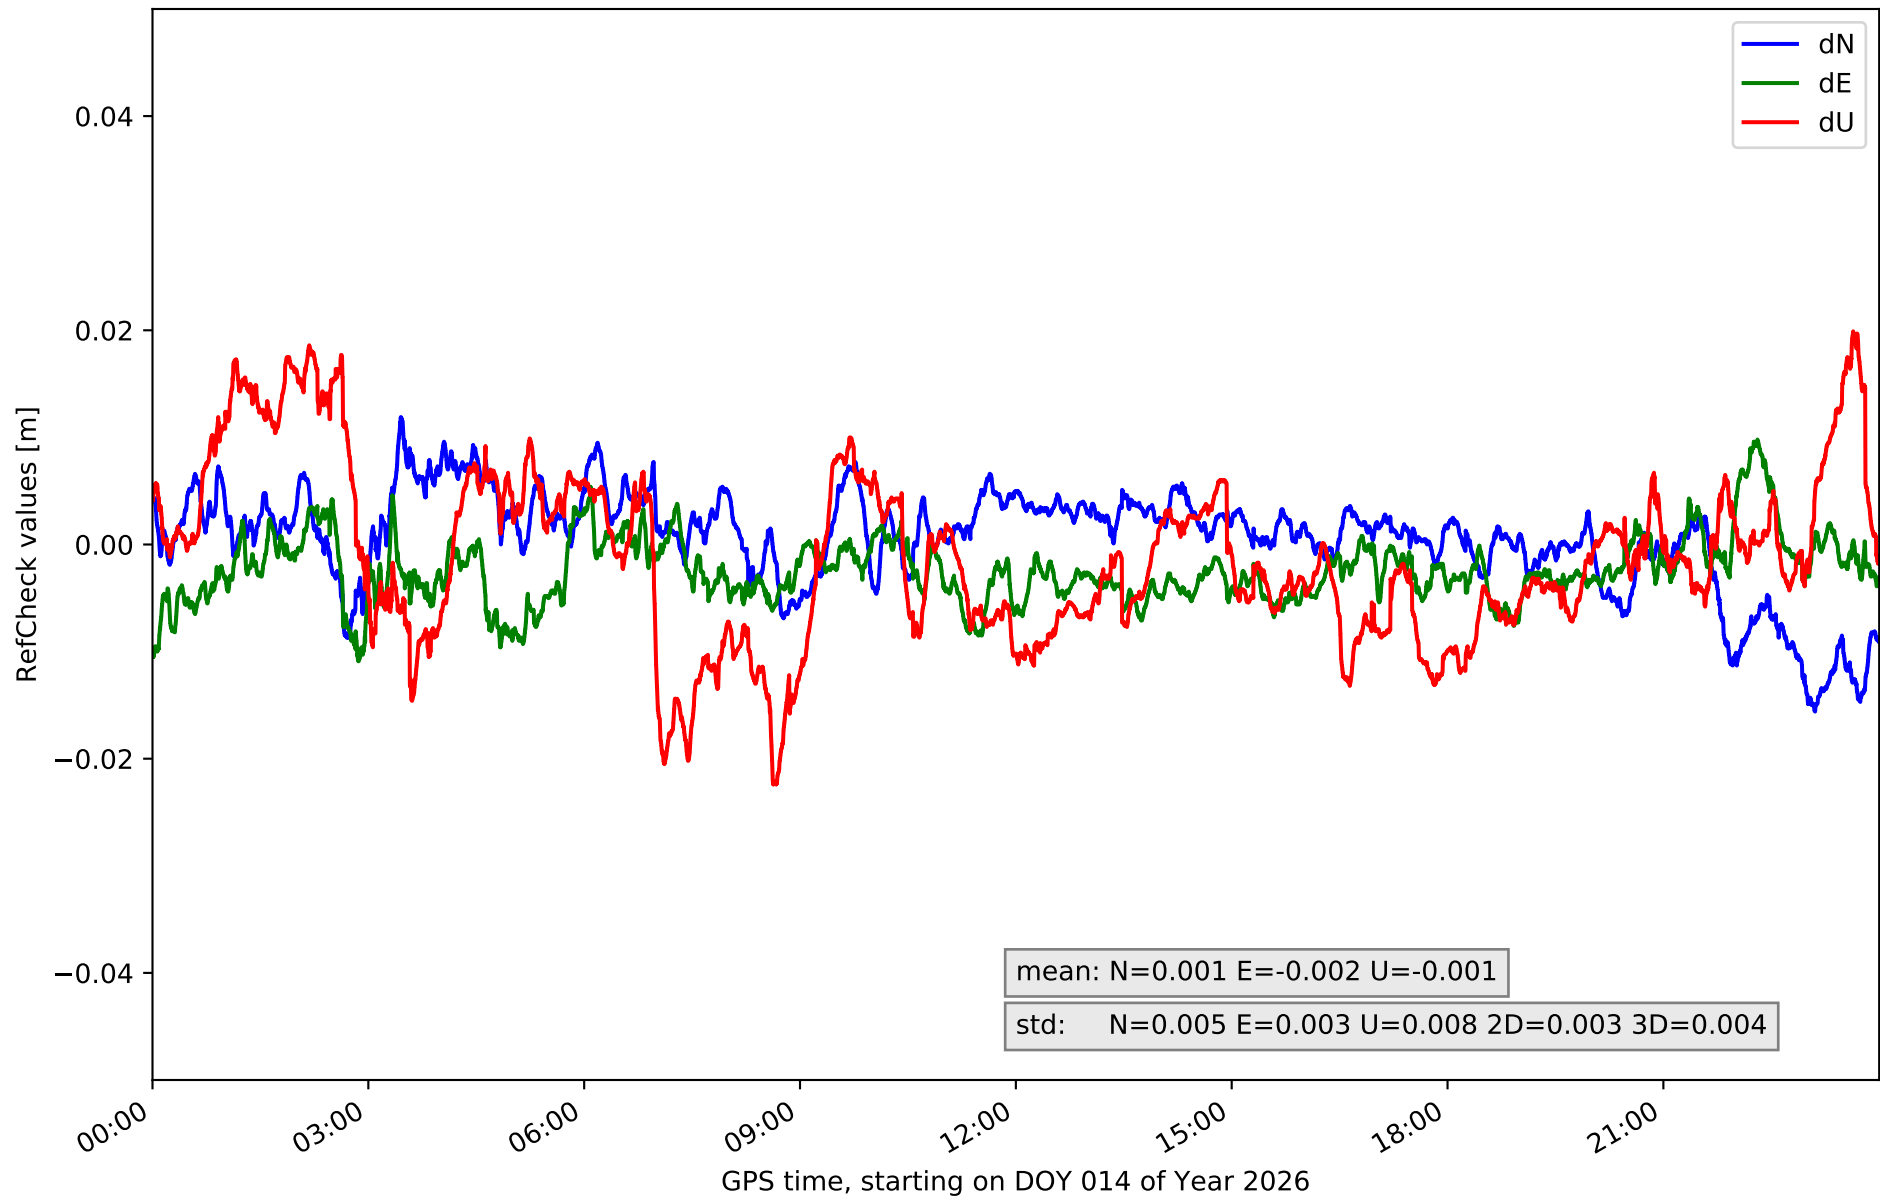


RefCheck for station IZAN in network NT32

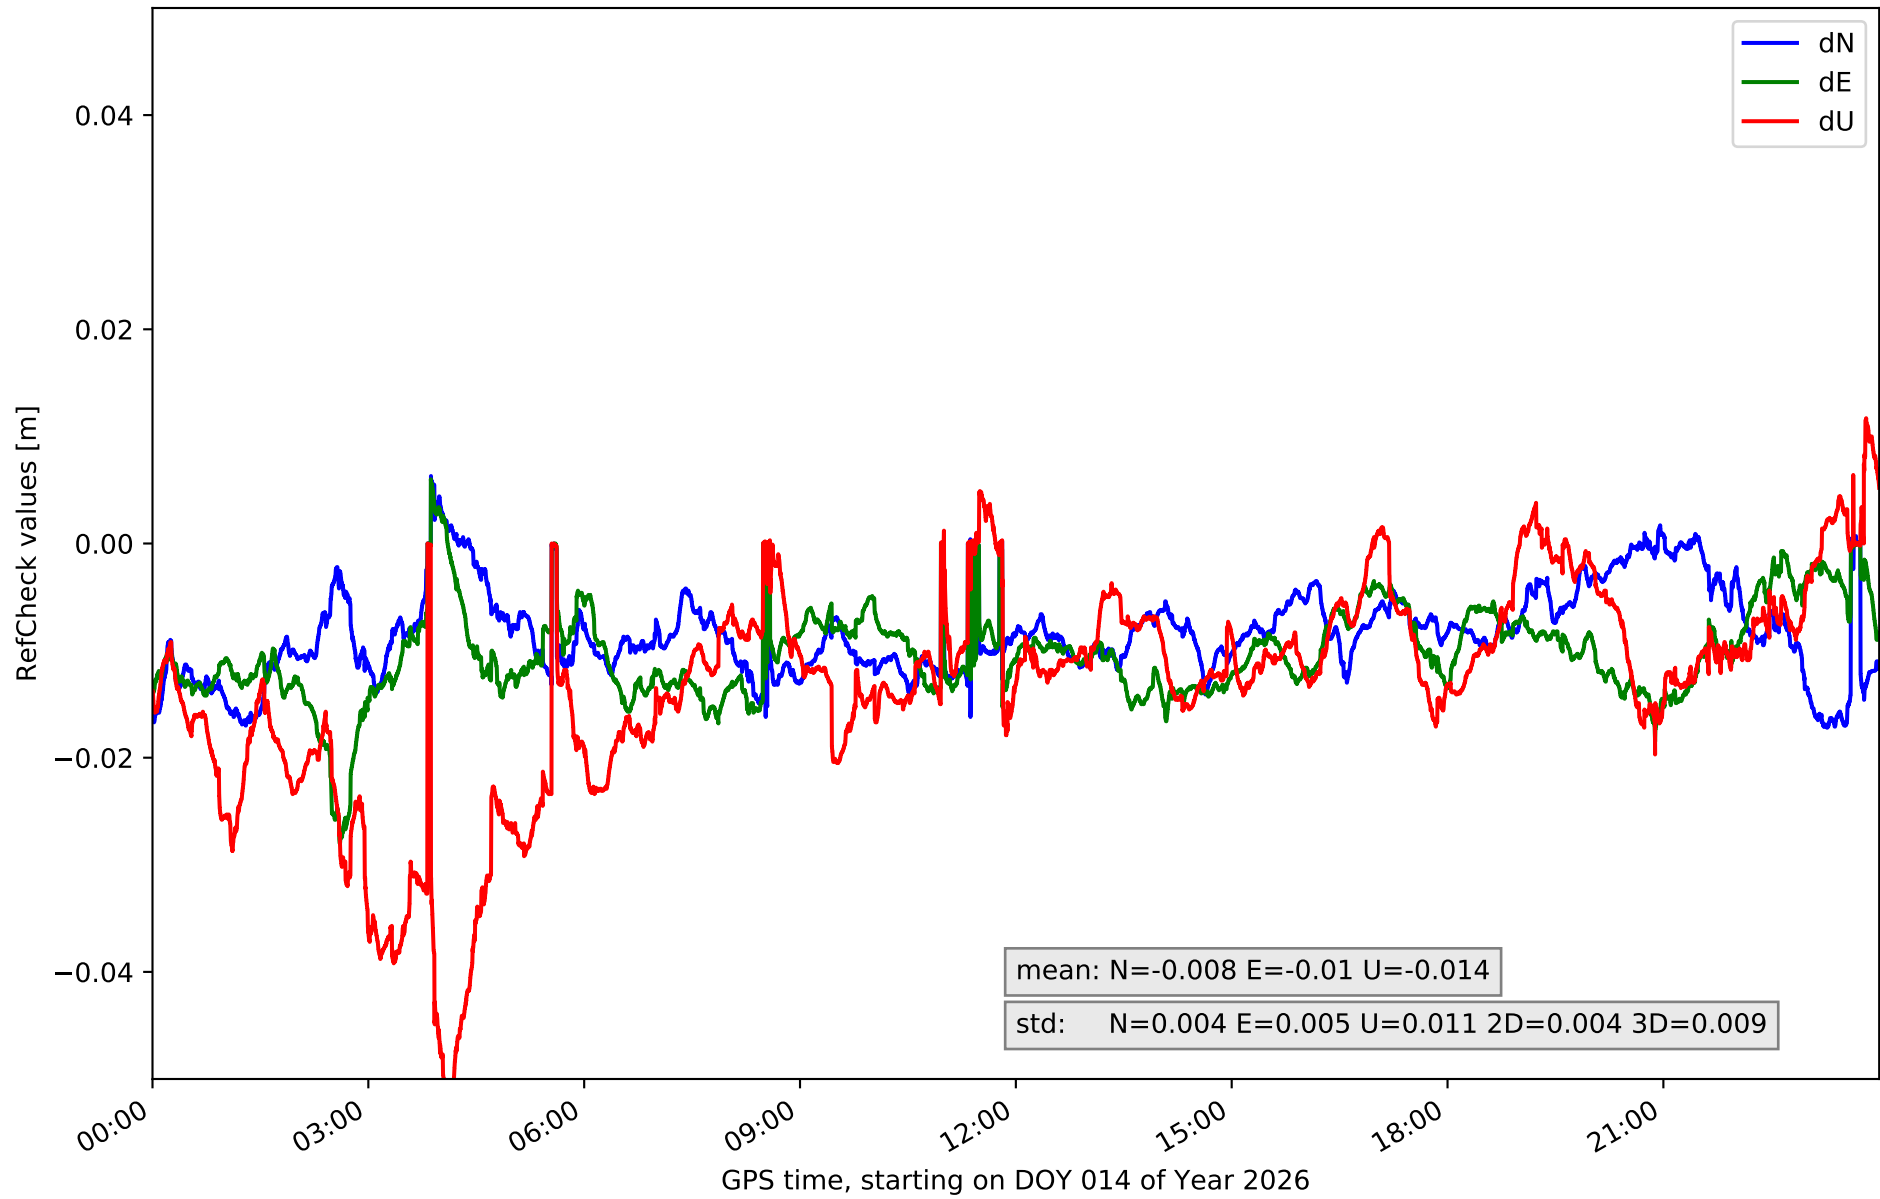


RefCheck for station LP01 in network NT32

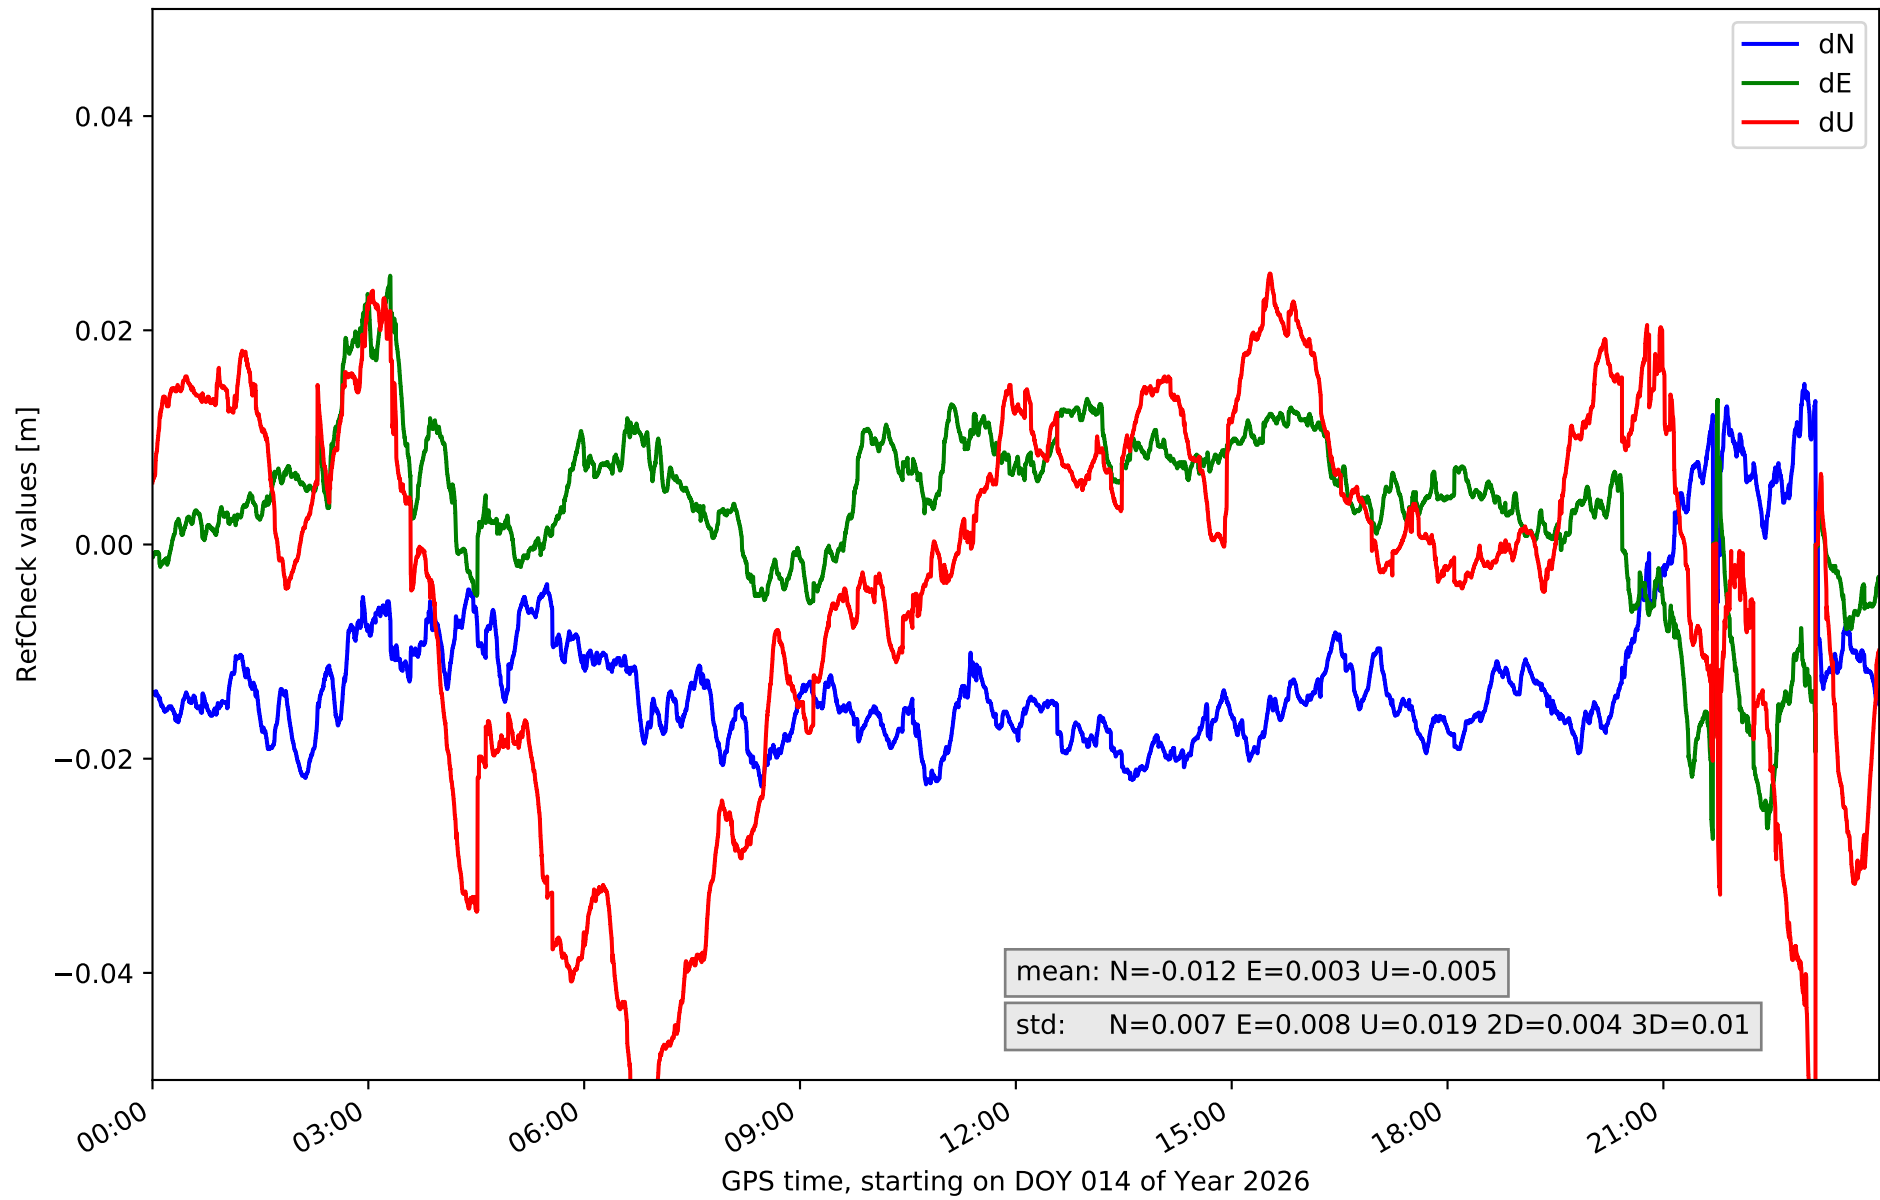


RefCheck for station LP03 in network NT32

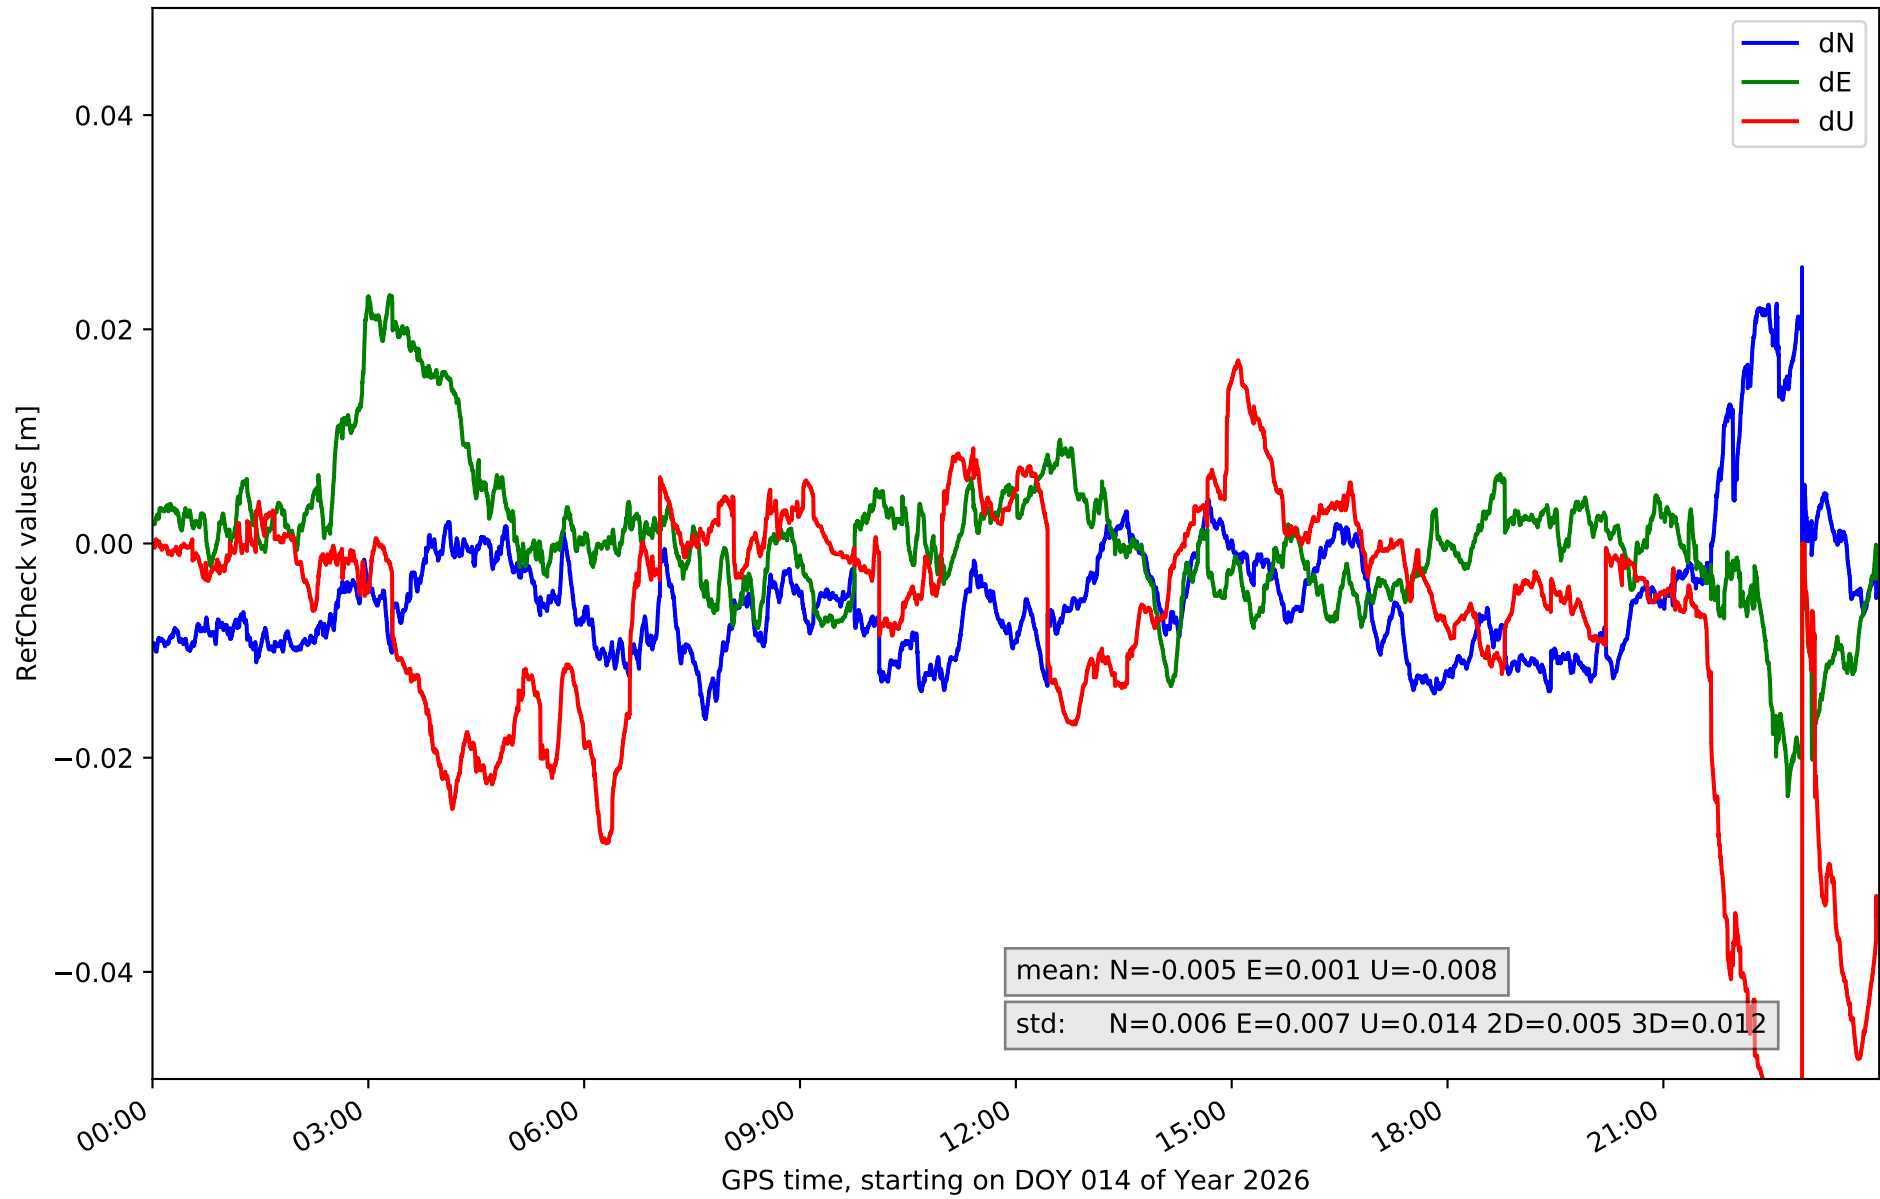


RefCheck for station LPAL in network NT32

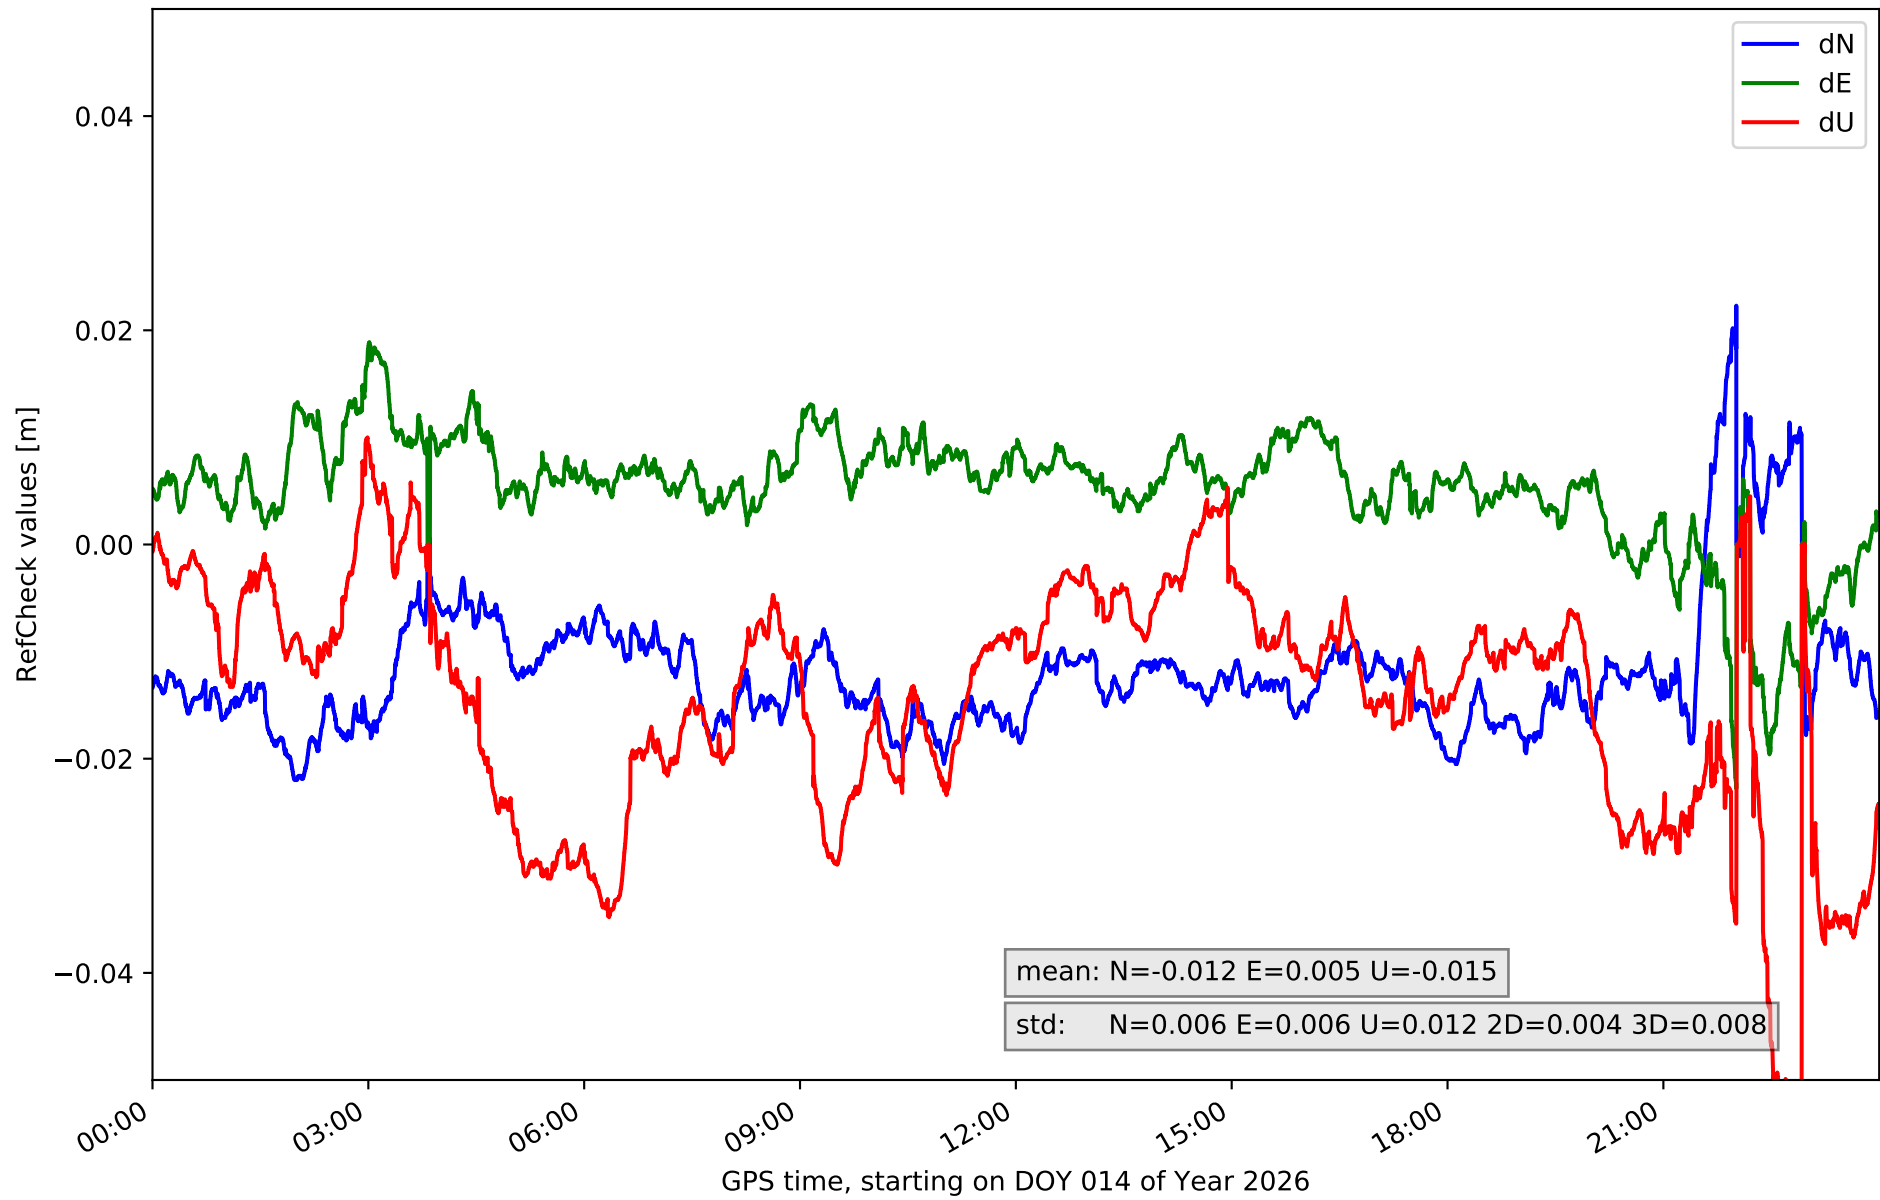


RefCheck for station LRES in network NT32

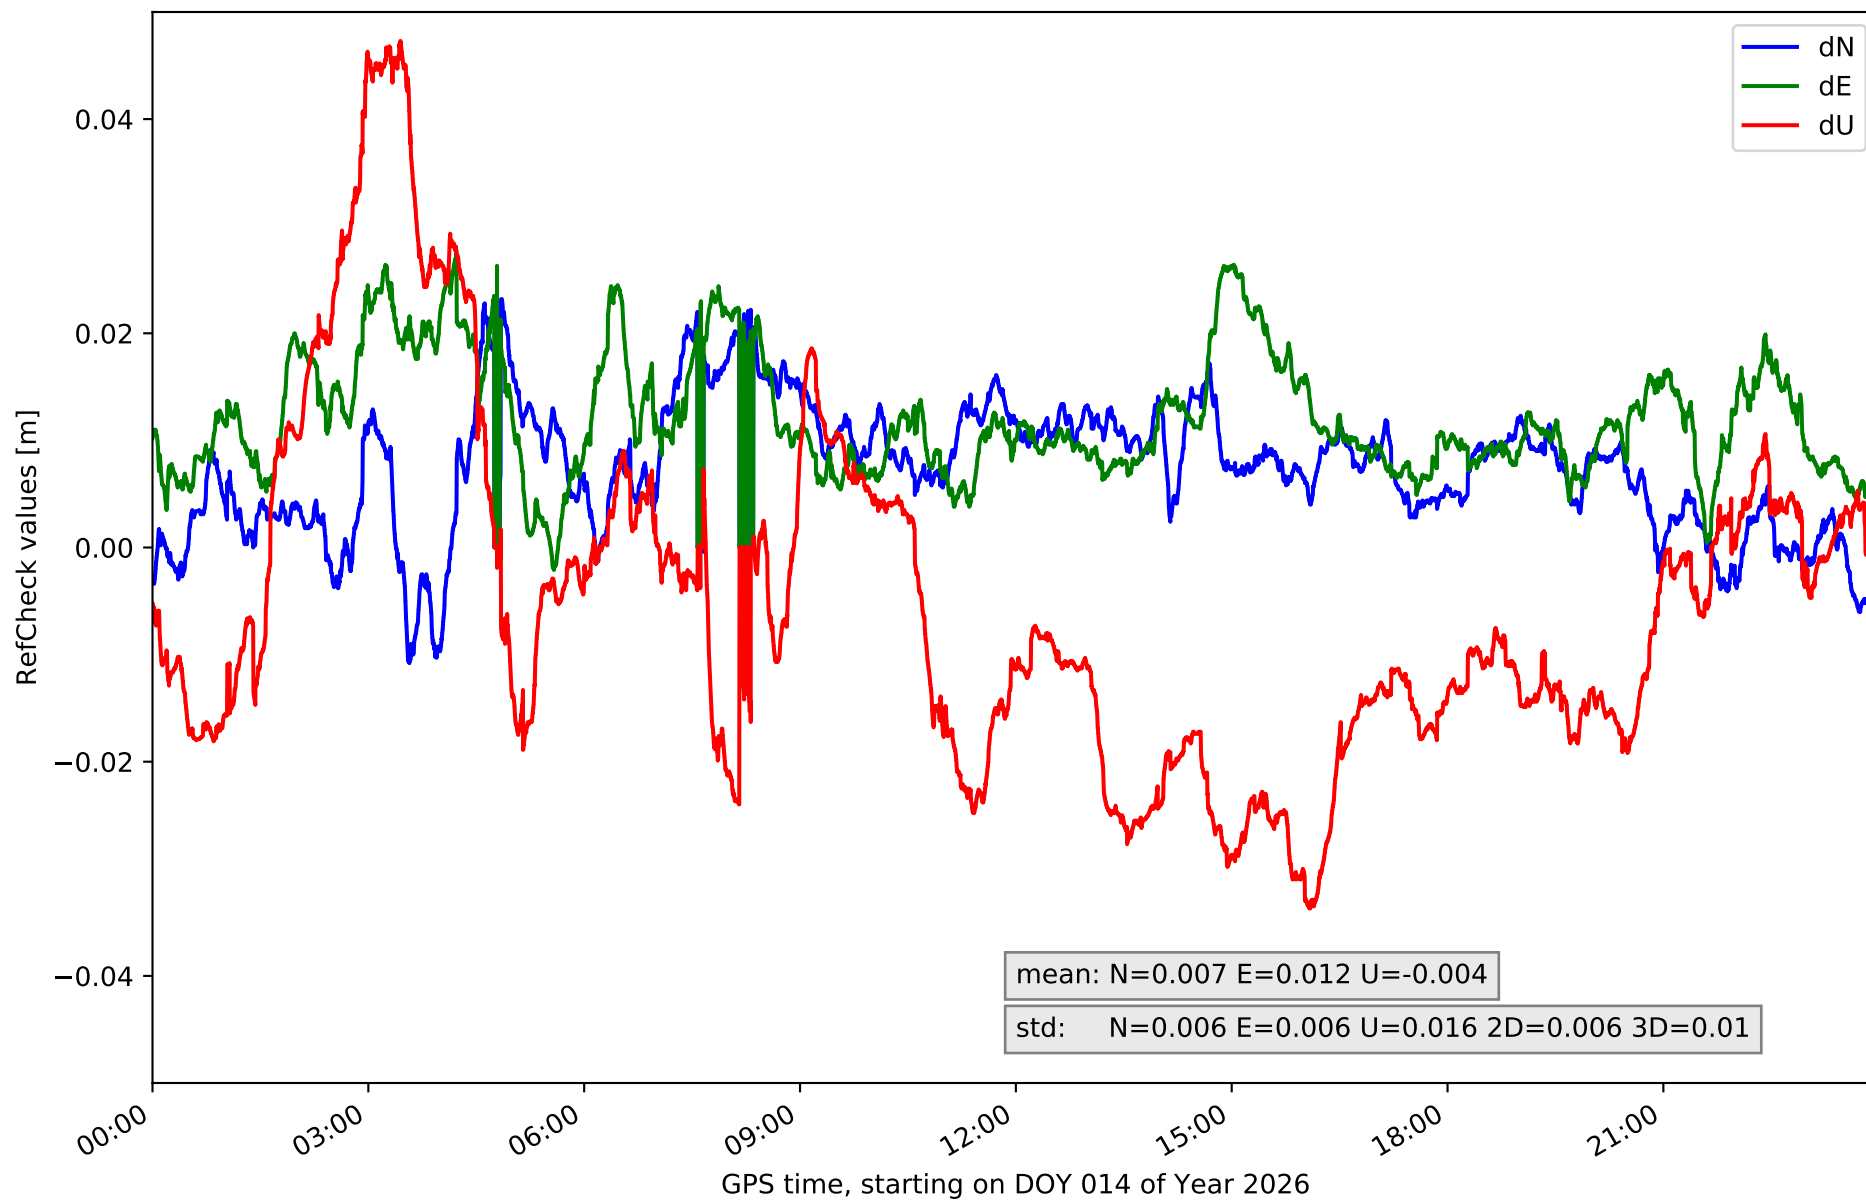


RefCheck for station TN01 in network NT32

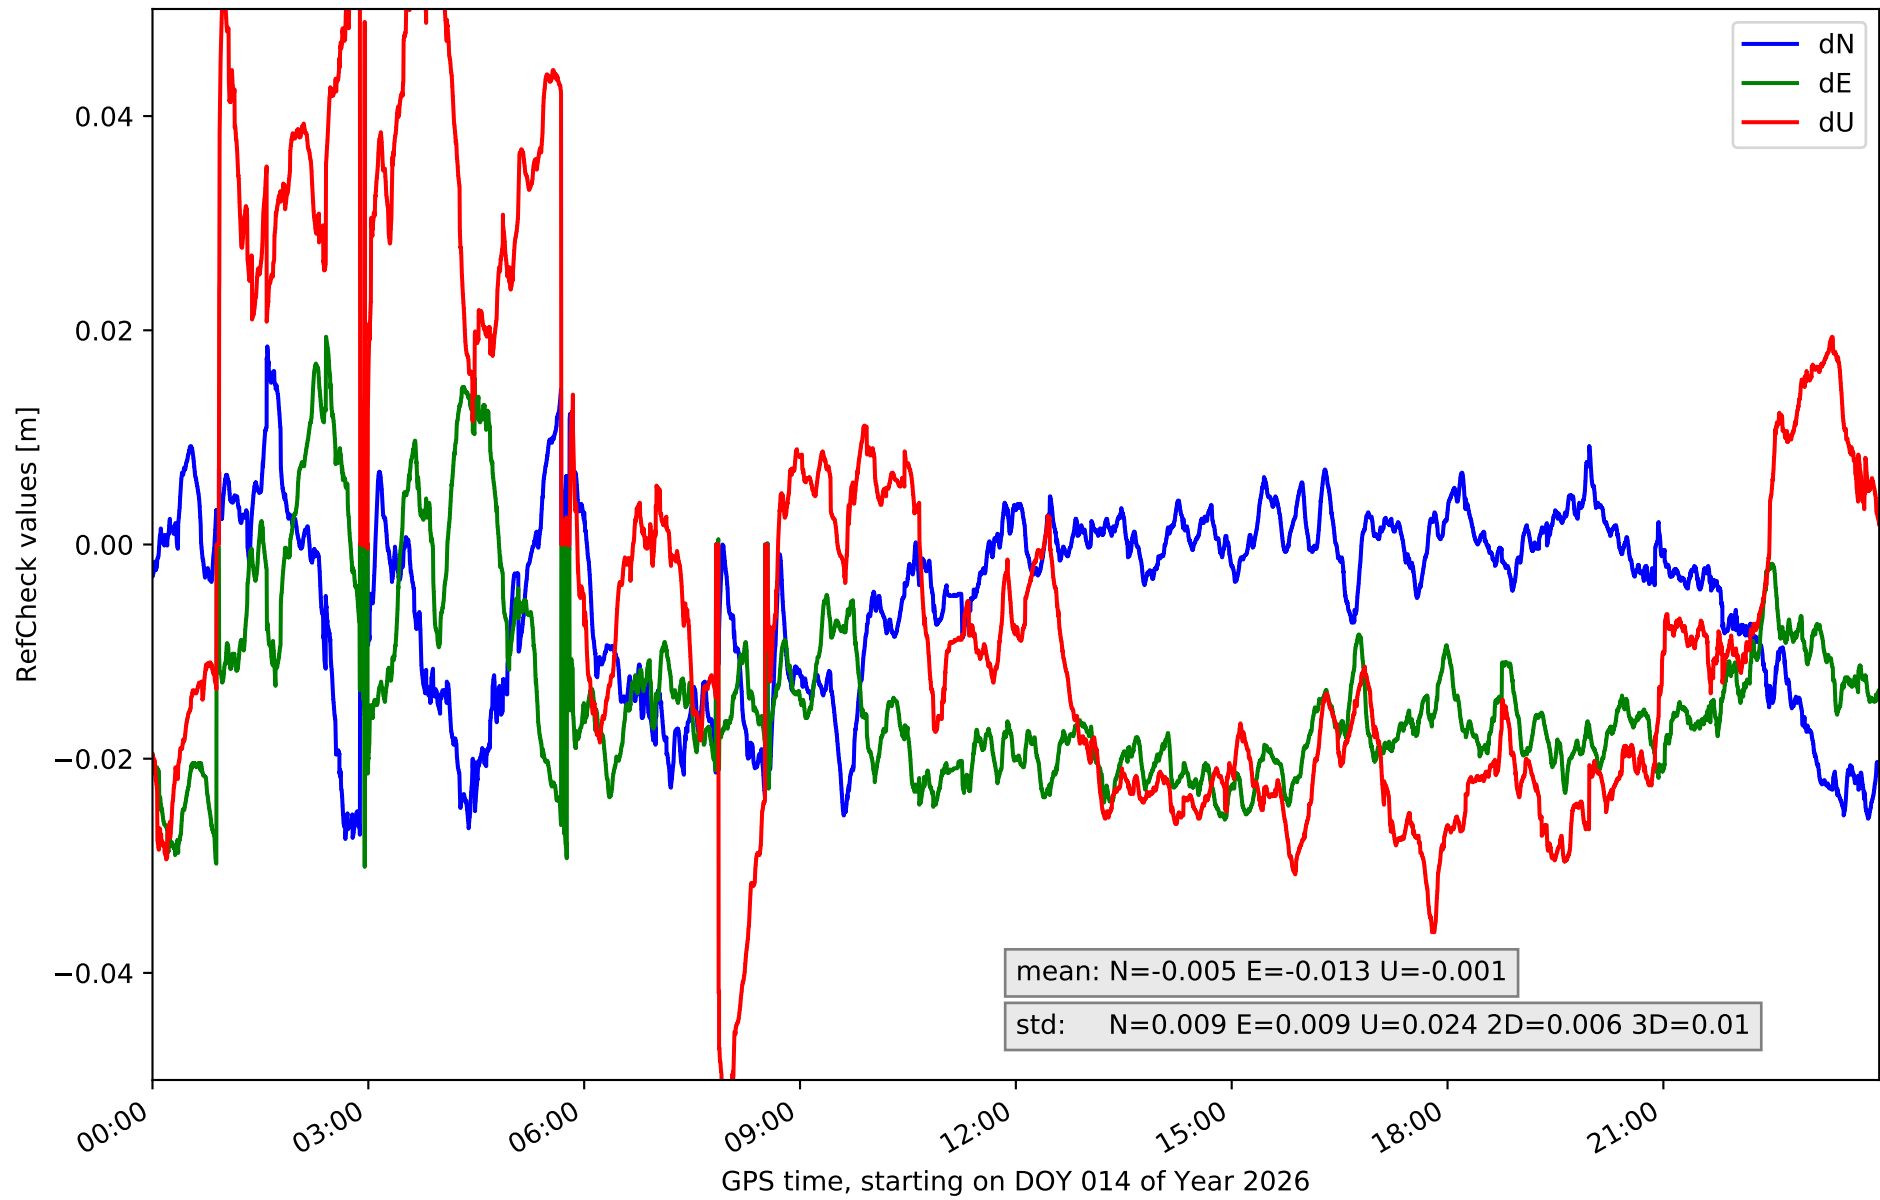


RefCheck for station TN02 in network NT32

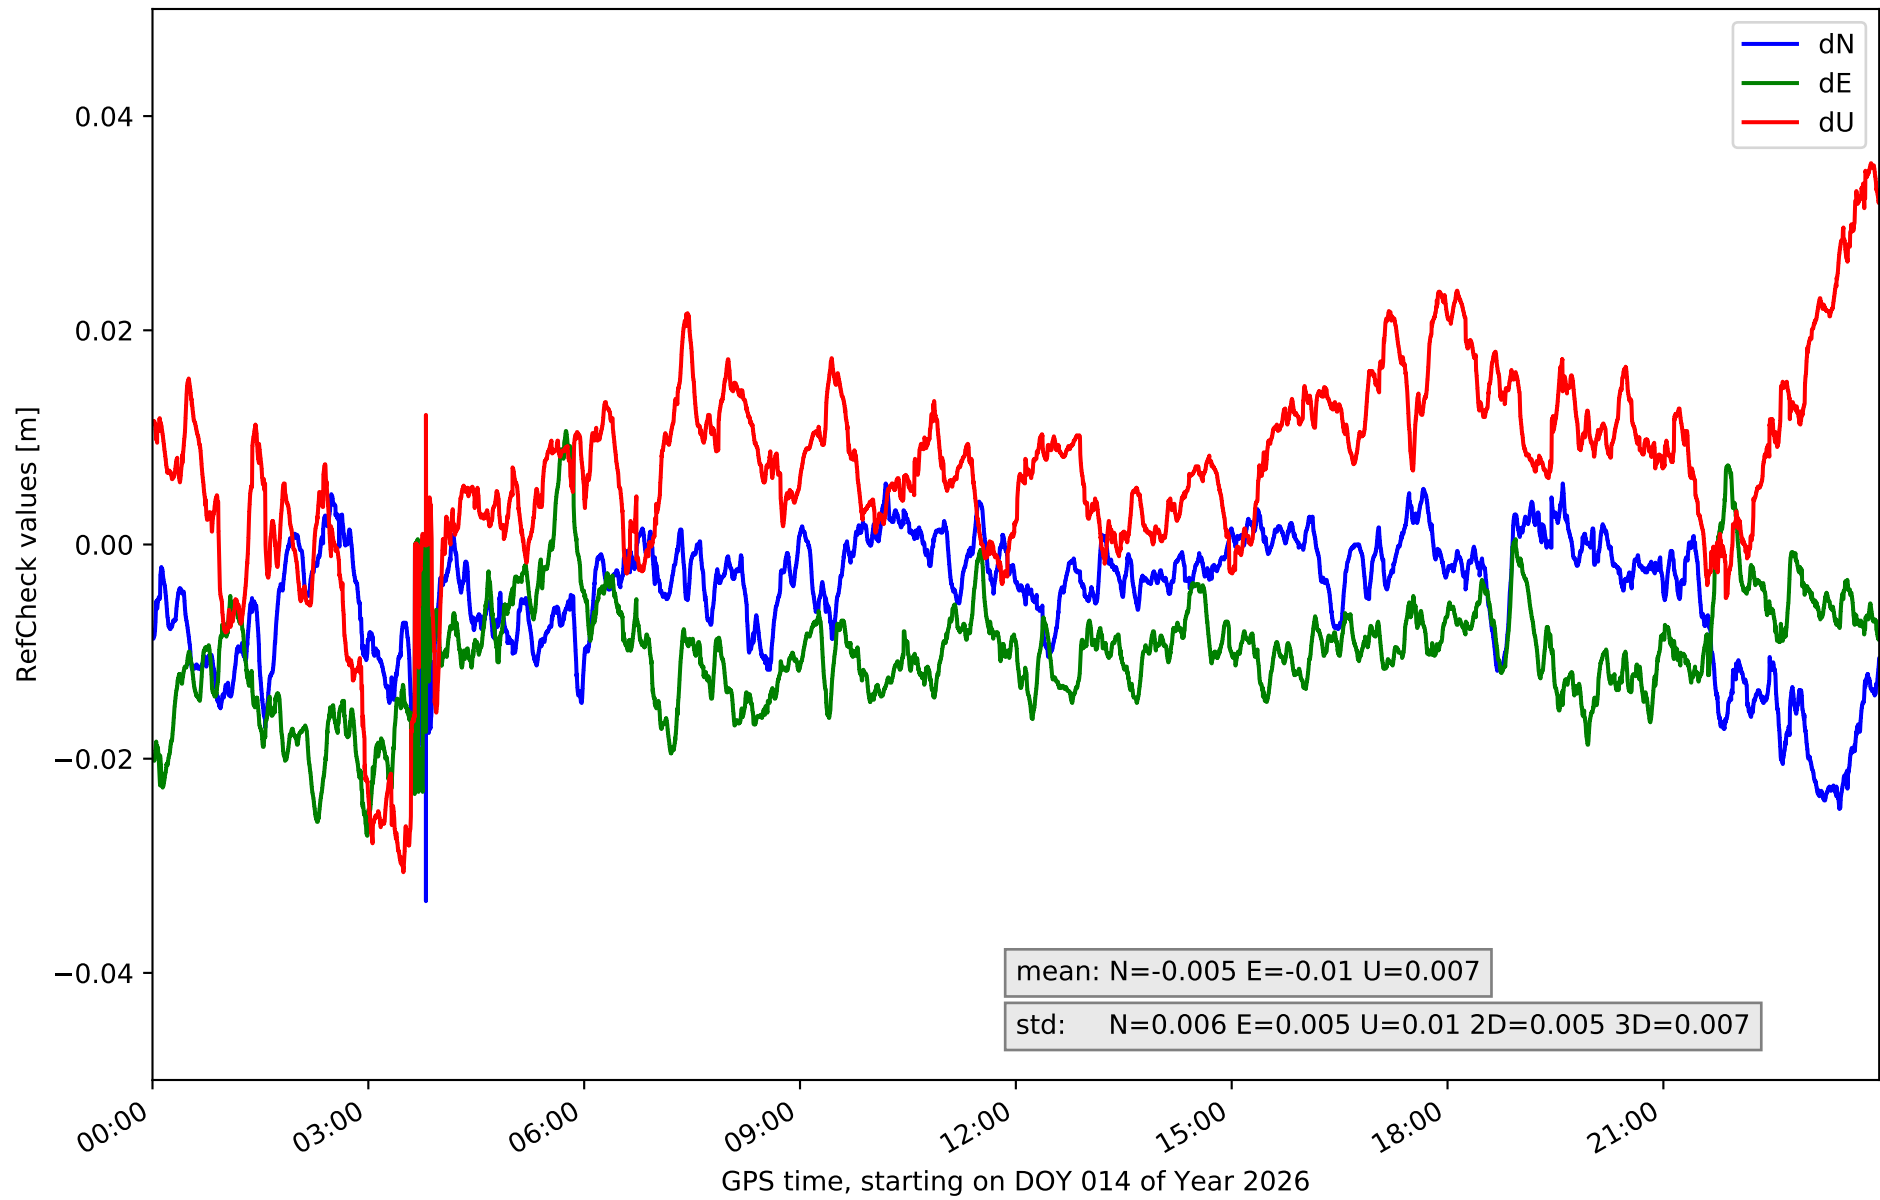


RefCheck for station TN03 in network NT32

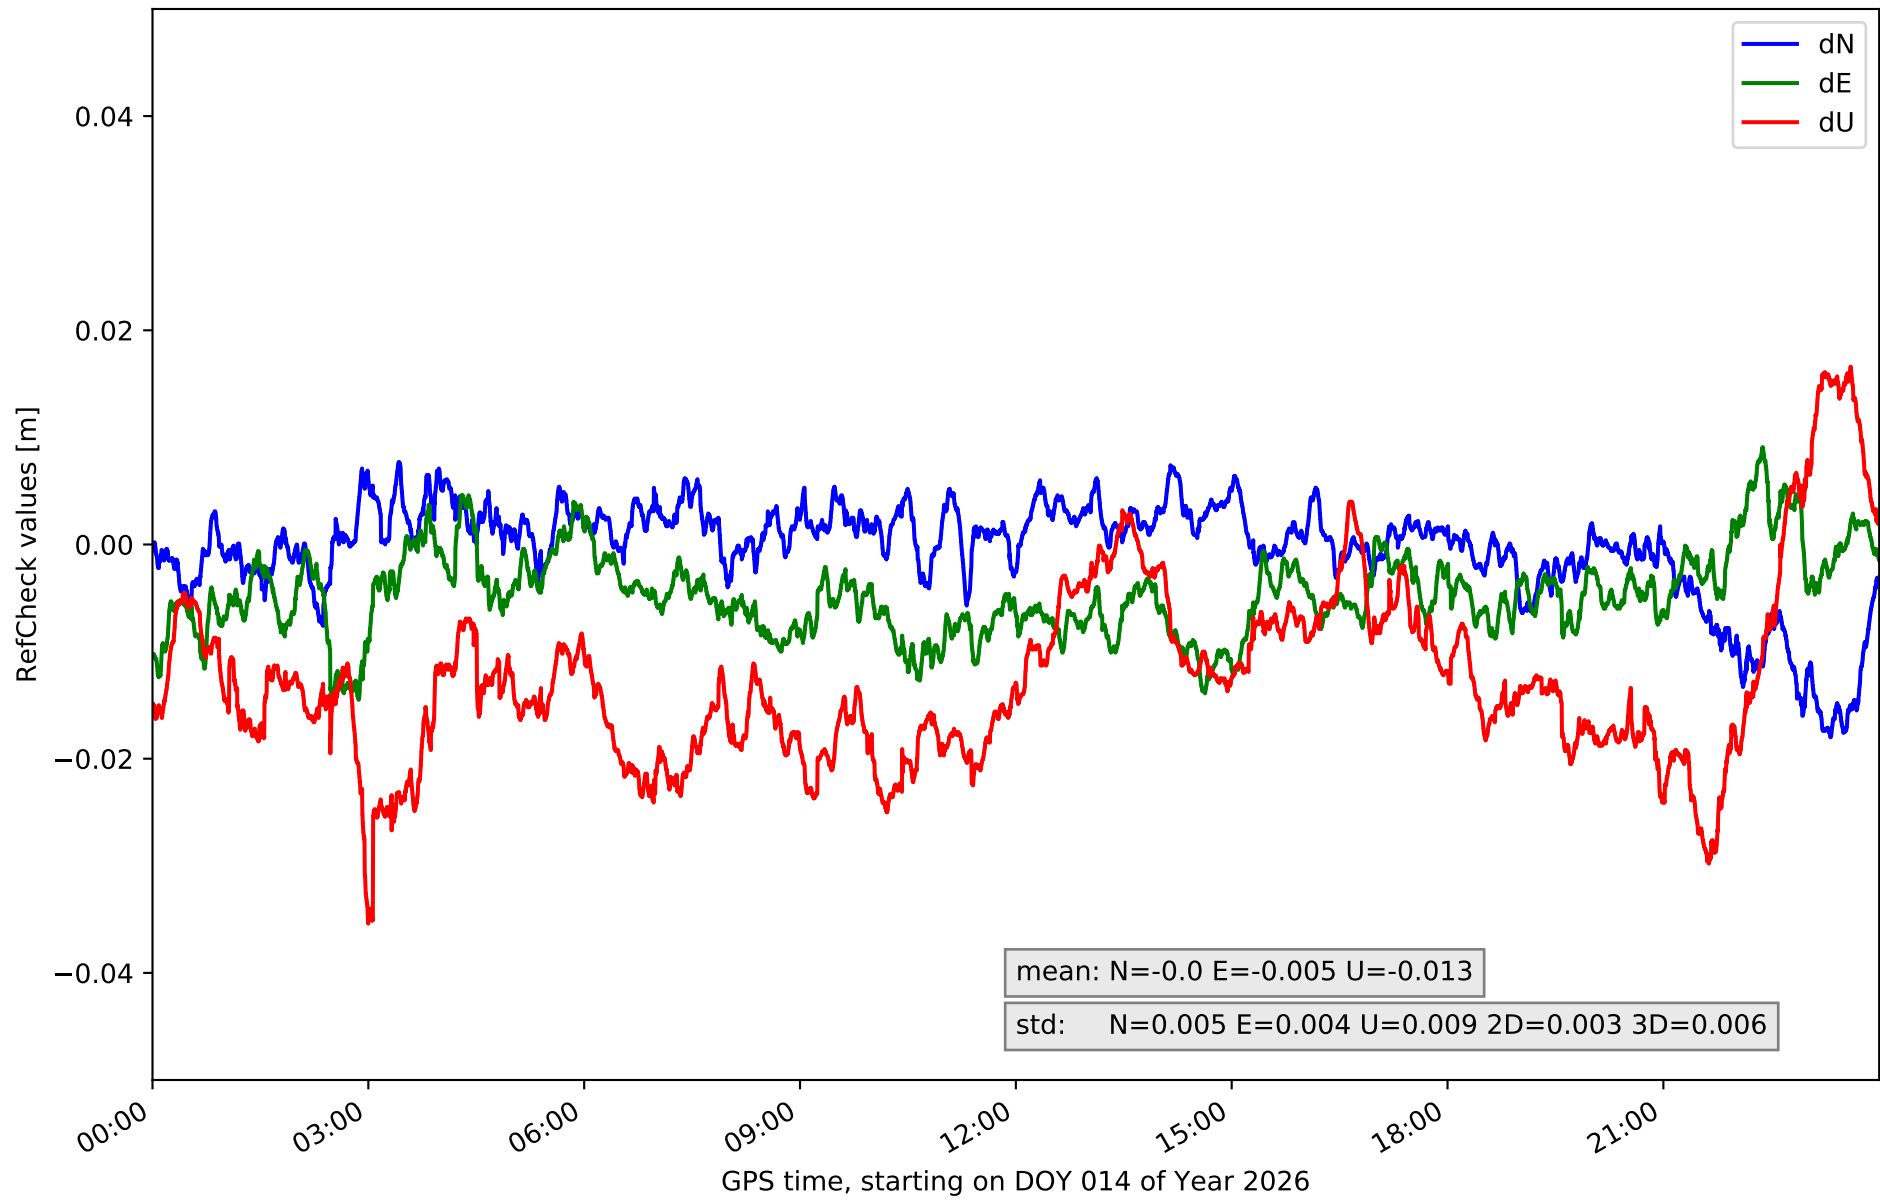


RefCheck for station TN06 in network NT32

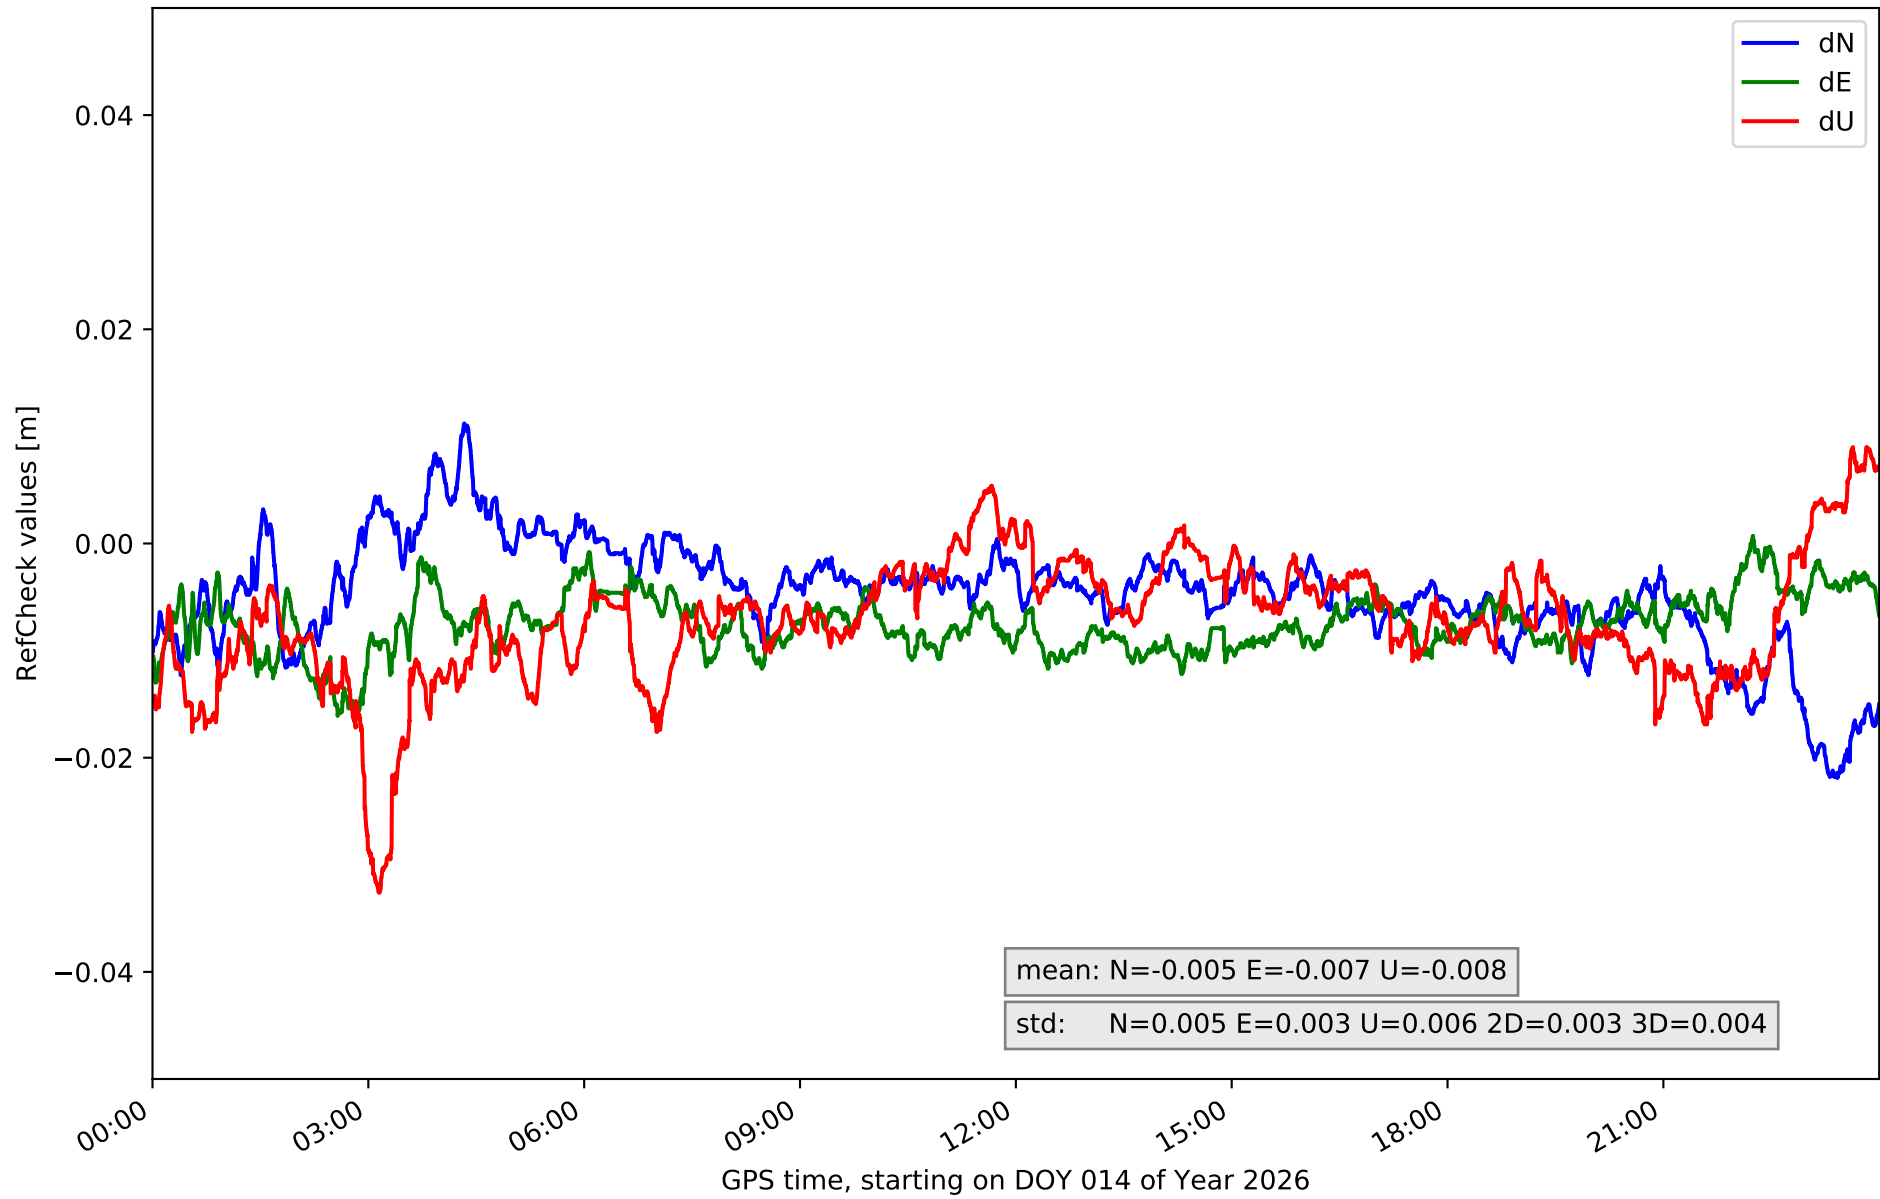

RefCheck for station TN09 in network NT32

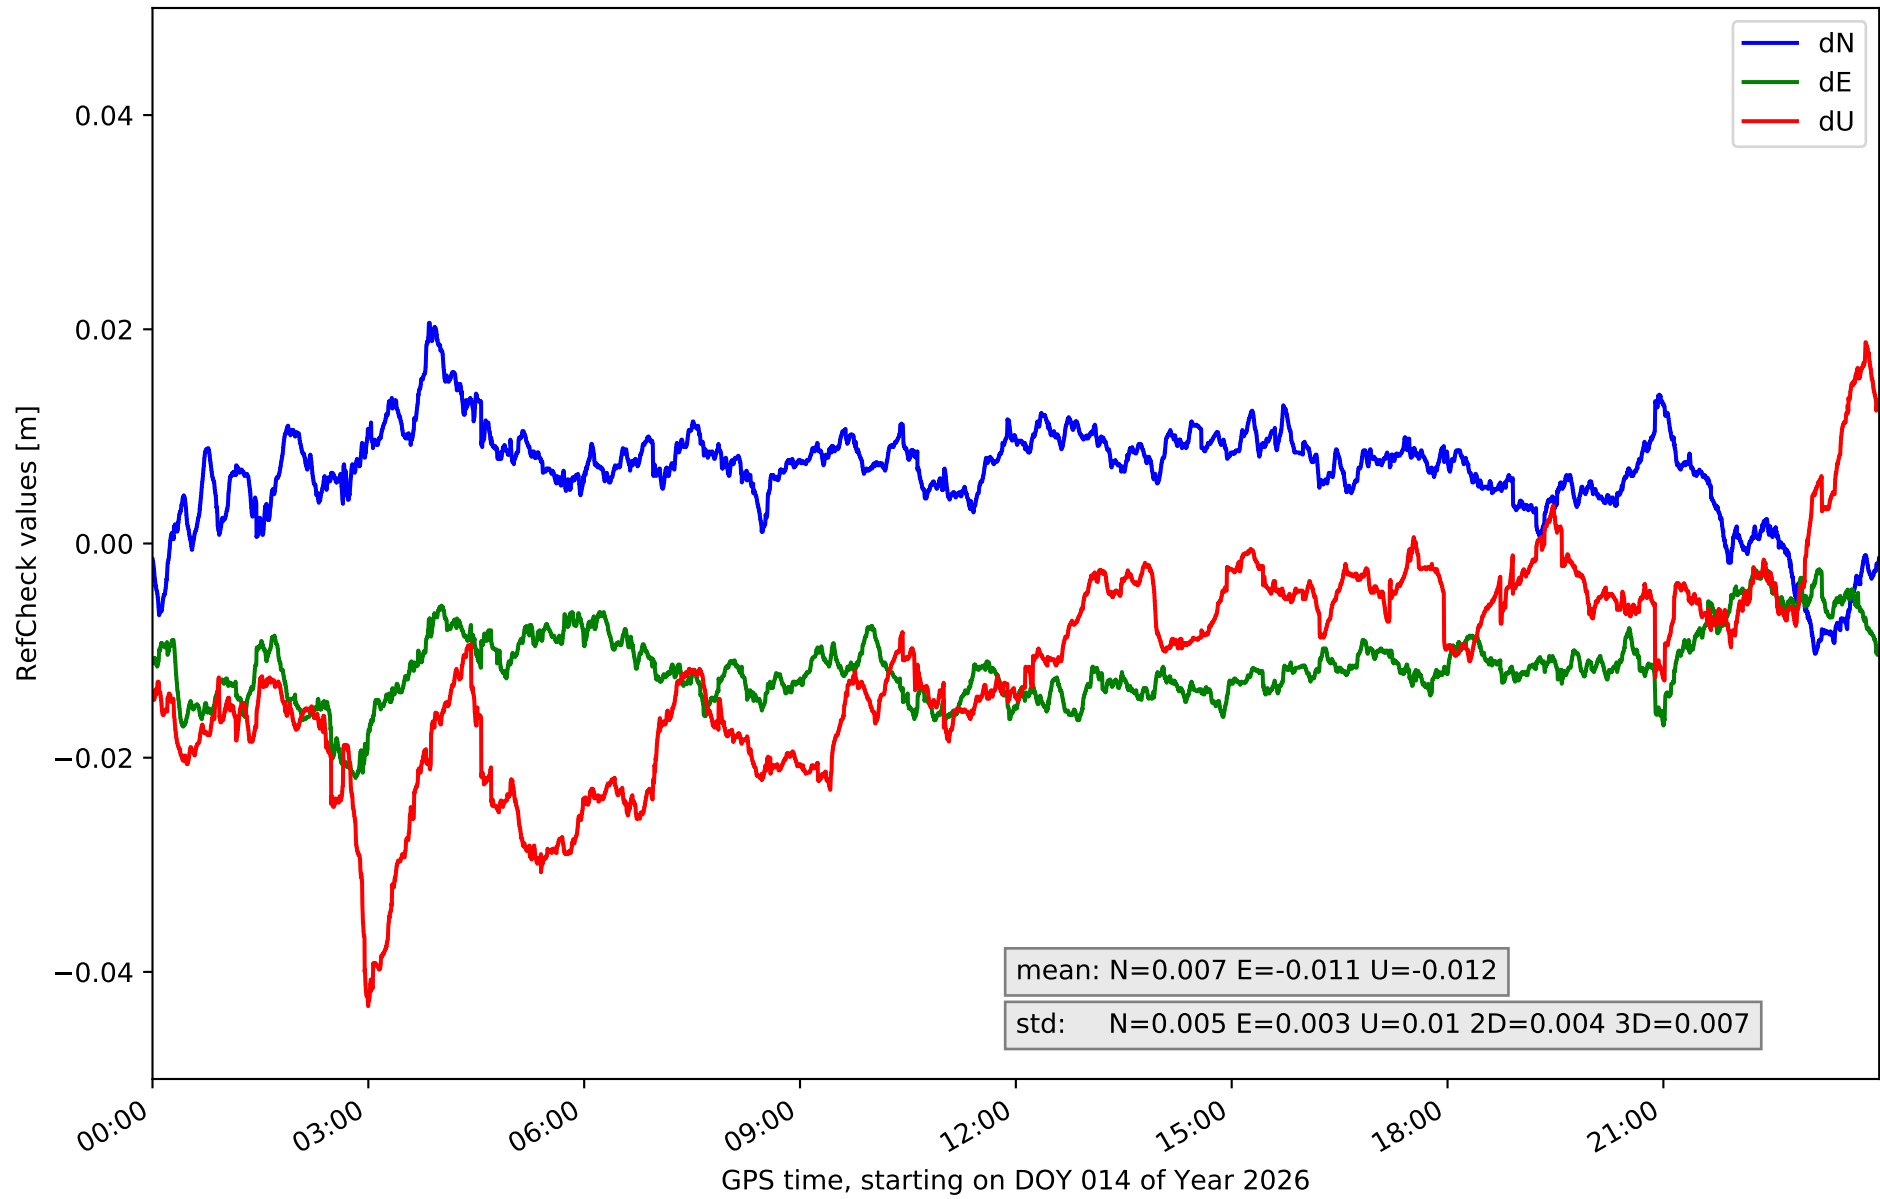

RefCheck for station TE11 in network NT32

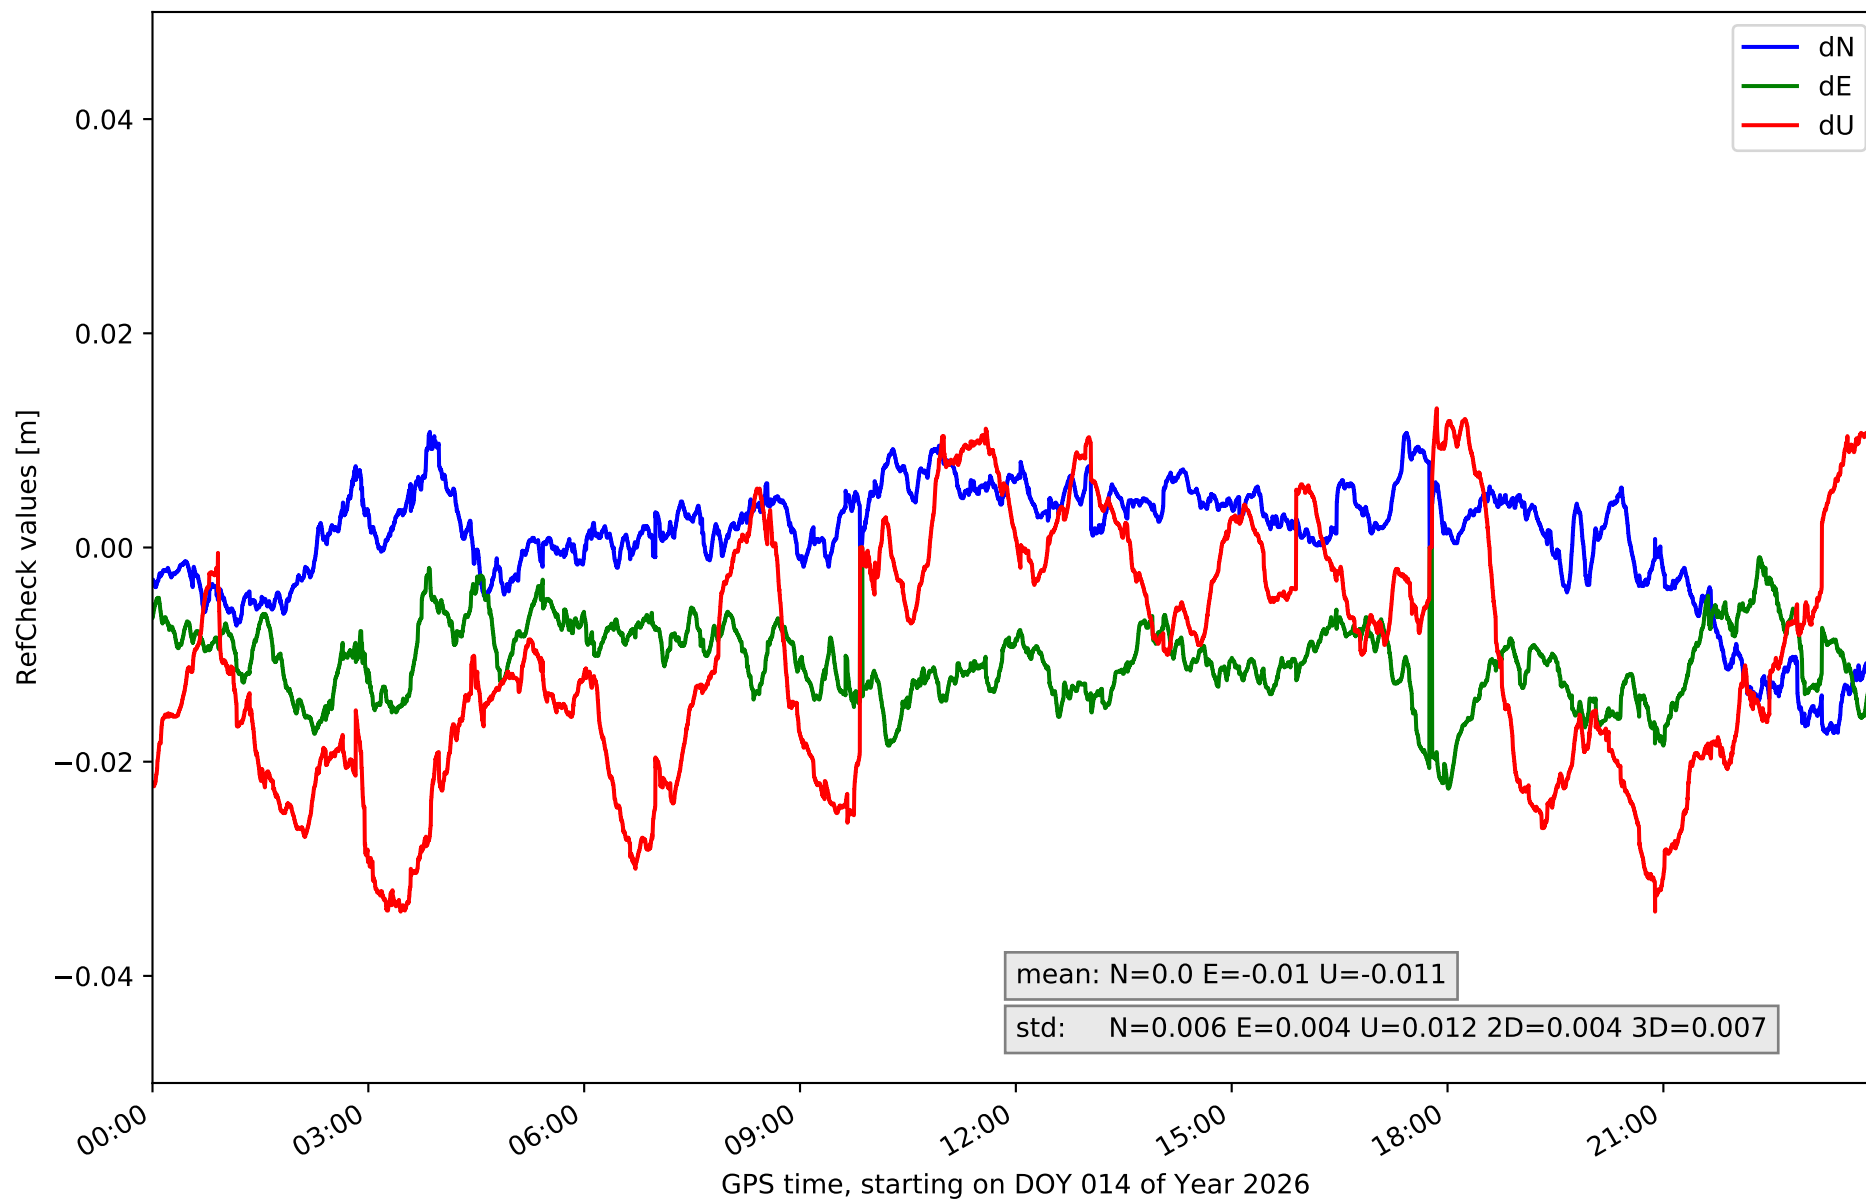

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.013	0.013	0.005	0.003	0.026	0.004	-0.015	0.026	0.009	0.004	0.005	56568	83.4	14403	21.2
EH02	-0.007	0.03	0.006	-0.013	0.035	0.008	-0.04	0.06	0.02	0.007	0.013	63246	93.3	61371	90.5
GOM1	-0.018	0.006	0.005	-0.023	0.007	0.004	-0.045	0.04	0.012	0.003	0.008	49137	72.5	31626	46.6
GOME	-0.016	0.012	0.005	-0.011	0.01	0.003	-0.022	0.02	0.008	0.003	0.004	5693	8.4	1583	2.3
IZAN	-0.017	0.006	0.004	-0.028	0.006	0.005	-0.052	0.012	0.011	0.004	0.009	58106	85.7	30841	45.5
LP01	-0.023	0.015	0.007	-0.028	0.025	0.008	-0.06	0.025	0.019	0.004	0.01	61526	90.7	42814	63.1
LP03	-0.016	0.026	0.006	-0.024	0.023	0.007	-0.06	0.017	0.014	0.005	0.012	26488	39.1	14785	21.8
LPAL	-0.022	0.022	0.006	-0.023	0.019	0.006	-0.061	0.01	0.012	0.004	0.008	63949	94.3	39275	57.9
LRES	-0.011	0.023	0.006	-0.002	0.028	0.006	-0.034	0.047	0.016	0.006	0.01	55053	81.2	30670	45.2
TN01	-0.028	0.018	0.009	-0.03	0.019	0.009	-0.056	0.057	0.024	0.006	0.01	62726	92.5	55692	82.1
TN02	-0.033	0.006	0.006	-0.027	0.011	0.005	-0.031	0.036	0.01	0.005	0.007	48361	71.3	15759	23.2
TN03	-0.018	0.008	0.005	-0.015	0.009	0.004	-0.035	0.017	0.009	0.003	0.006	11196	16.5	17908	26.4
TN06	-0.022	0.011	0.005	-0.016	0.001	0.003	-0.033	0.009	0.006	0.003	0.004	30481	45.0	5527	8.2
TN09	-0.01	0.021	0.005	-0.022	-0.002	0.003	-0.043	0.019	0.01	0.004	0.007	59271	87.4	33082	48.8
TE11	-0.017	0.011	0.006	-0.022	-0.0	0.004	-0.034	0.013	0.012	0.004	0.007	45353	66.9	28621	42.2
Mean	-0.018	0.015	0.006	-0.019	0.014	0.005	-0.041	0.027	0.013	0.004	0.008	46476.9	68.5	28263.8	41.7
Min/Max	-0.033	0.03	0.009	-0.03	0.035	0.009	-0.061	0.06	0.024	0.007	0.013	63949	94.3	61371	90.5

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	92.1	91.9	91.7	94.2	90.8
considering satellites with dual-frequency fixed	88.2	88.0	86.4	90.7	86.9
considering all signals separately	88.4	88.5	86.4	90.9	85.6