

summary for network N32T

timeperiod chosen: from 2026-01-17-00:00:00 until 2026-01-17-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.1 seconds


average fixing percentage with threshold set to 0.3: 92.0 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: LEICA GR50	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

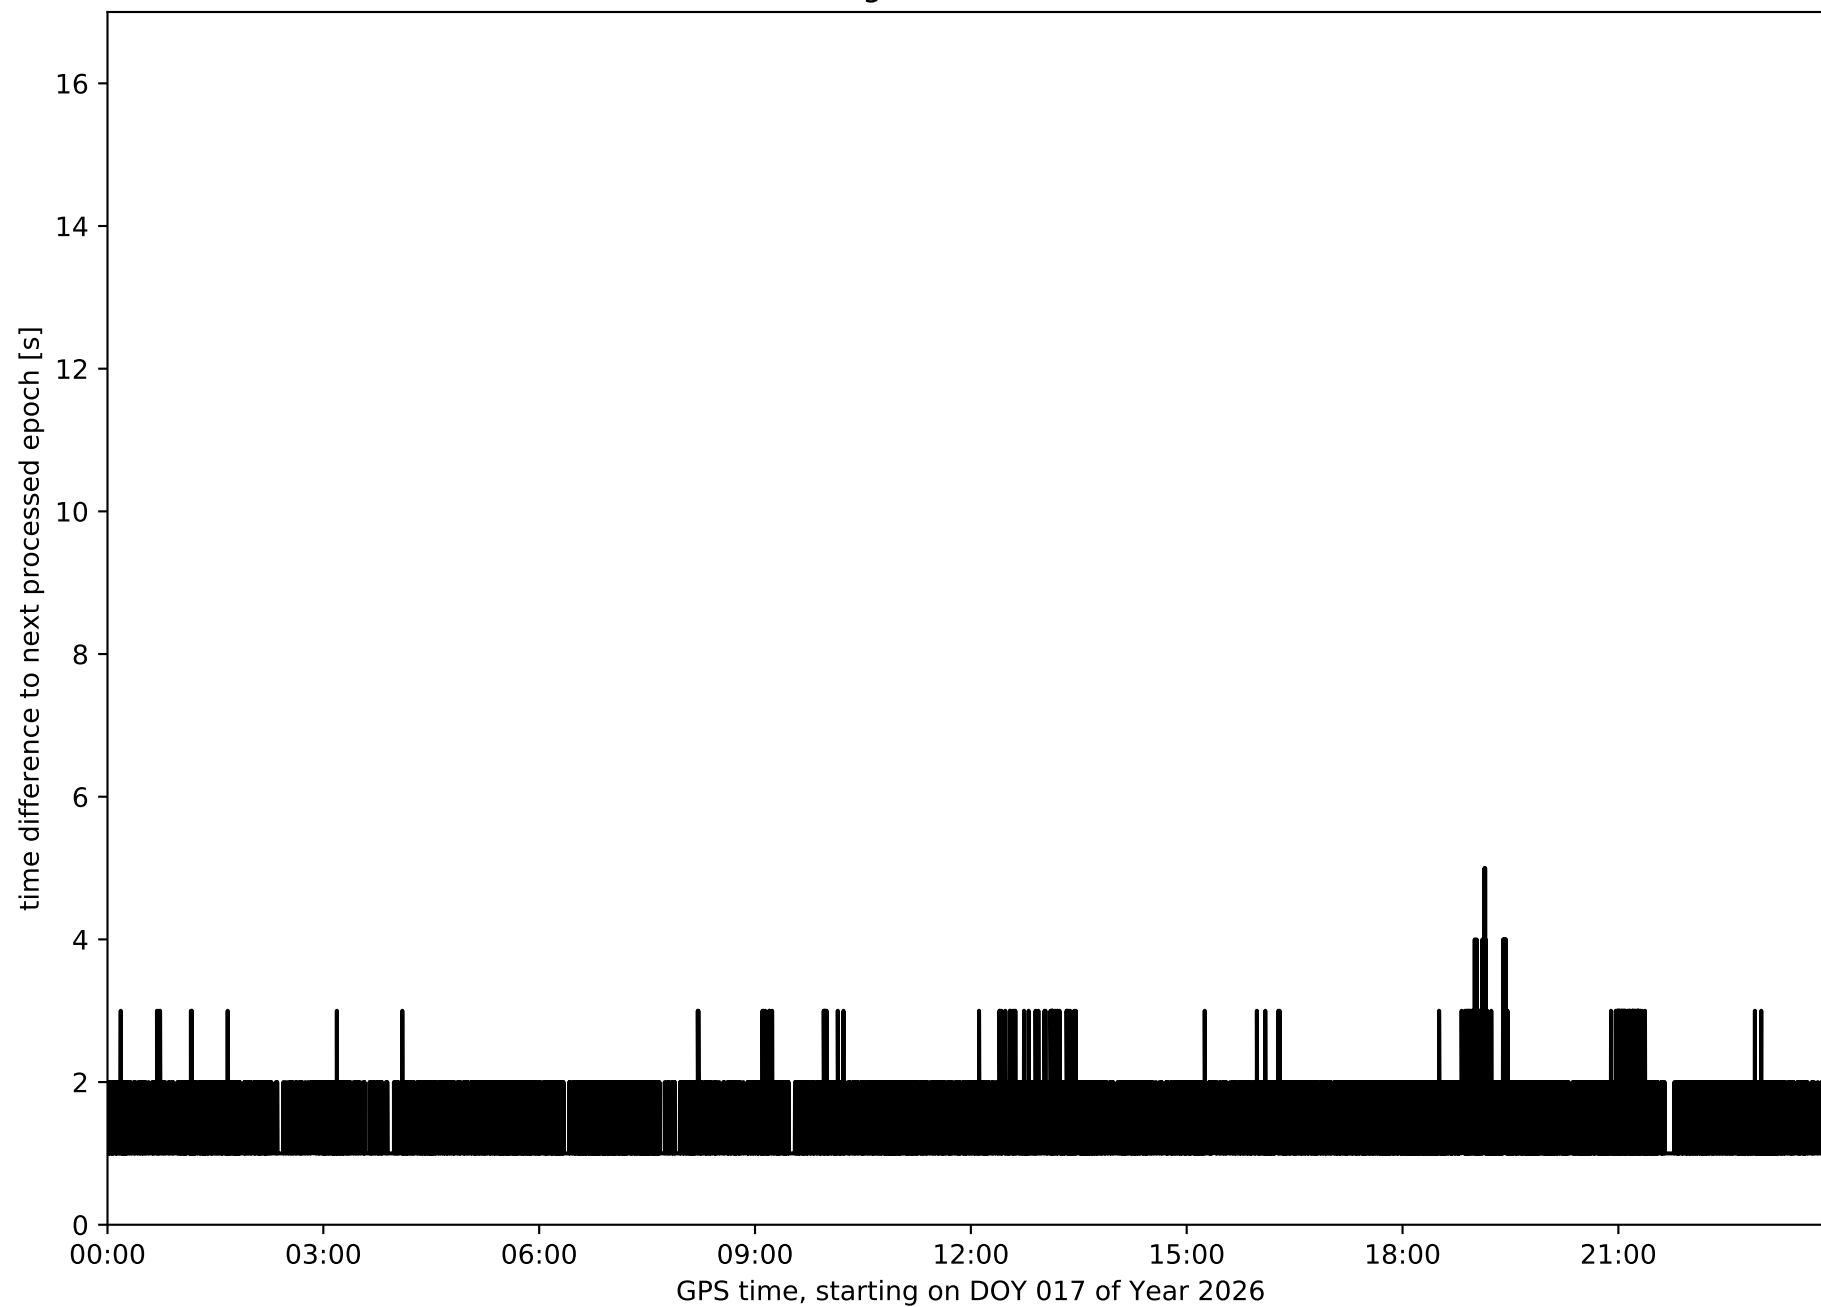


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

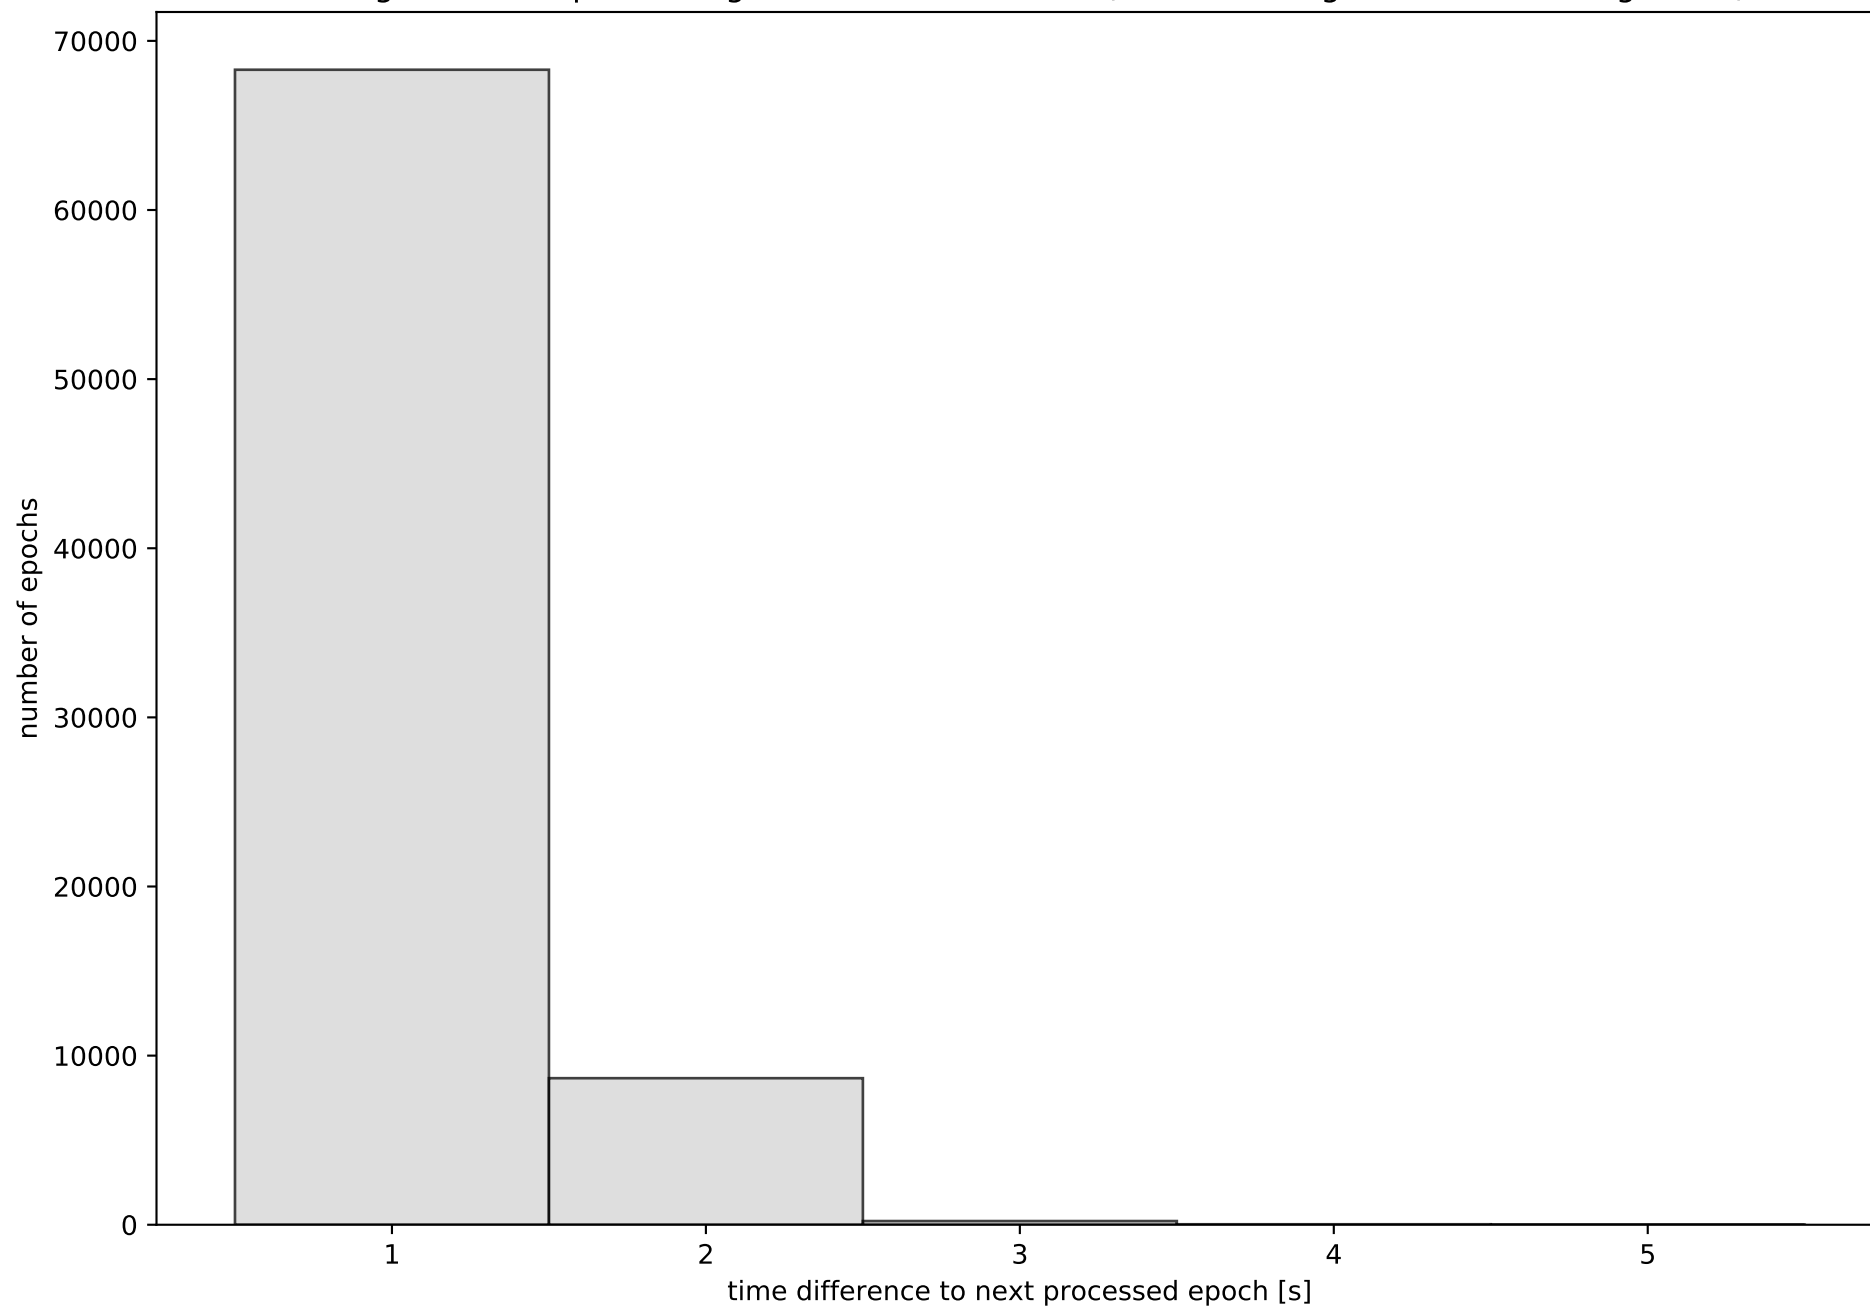


Network N32T with threshold set to 0.3

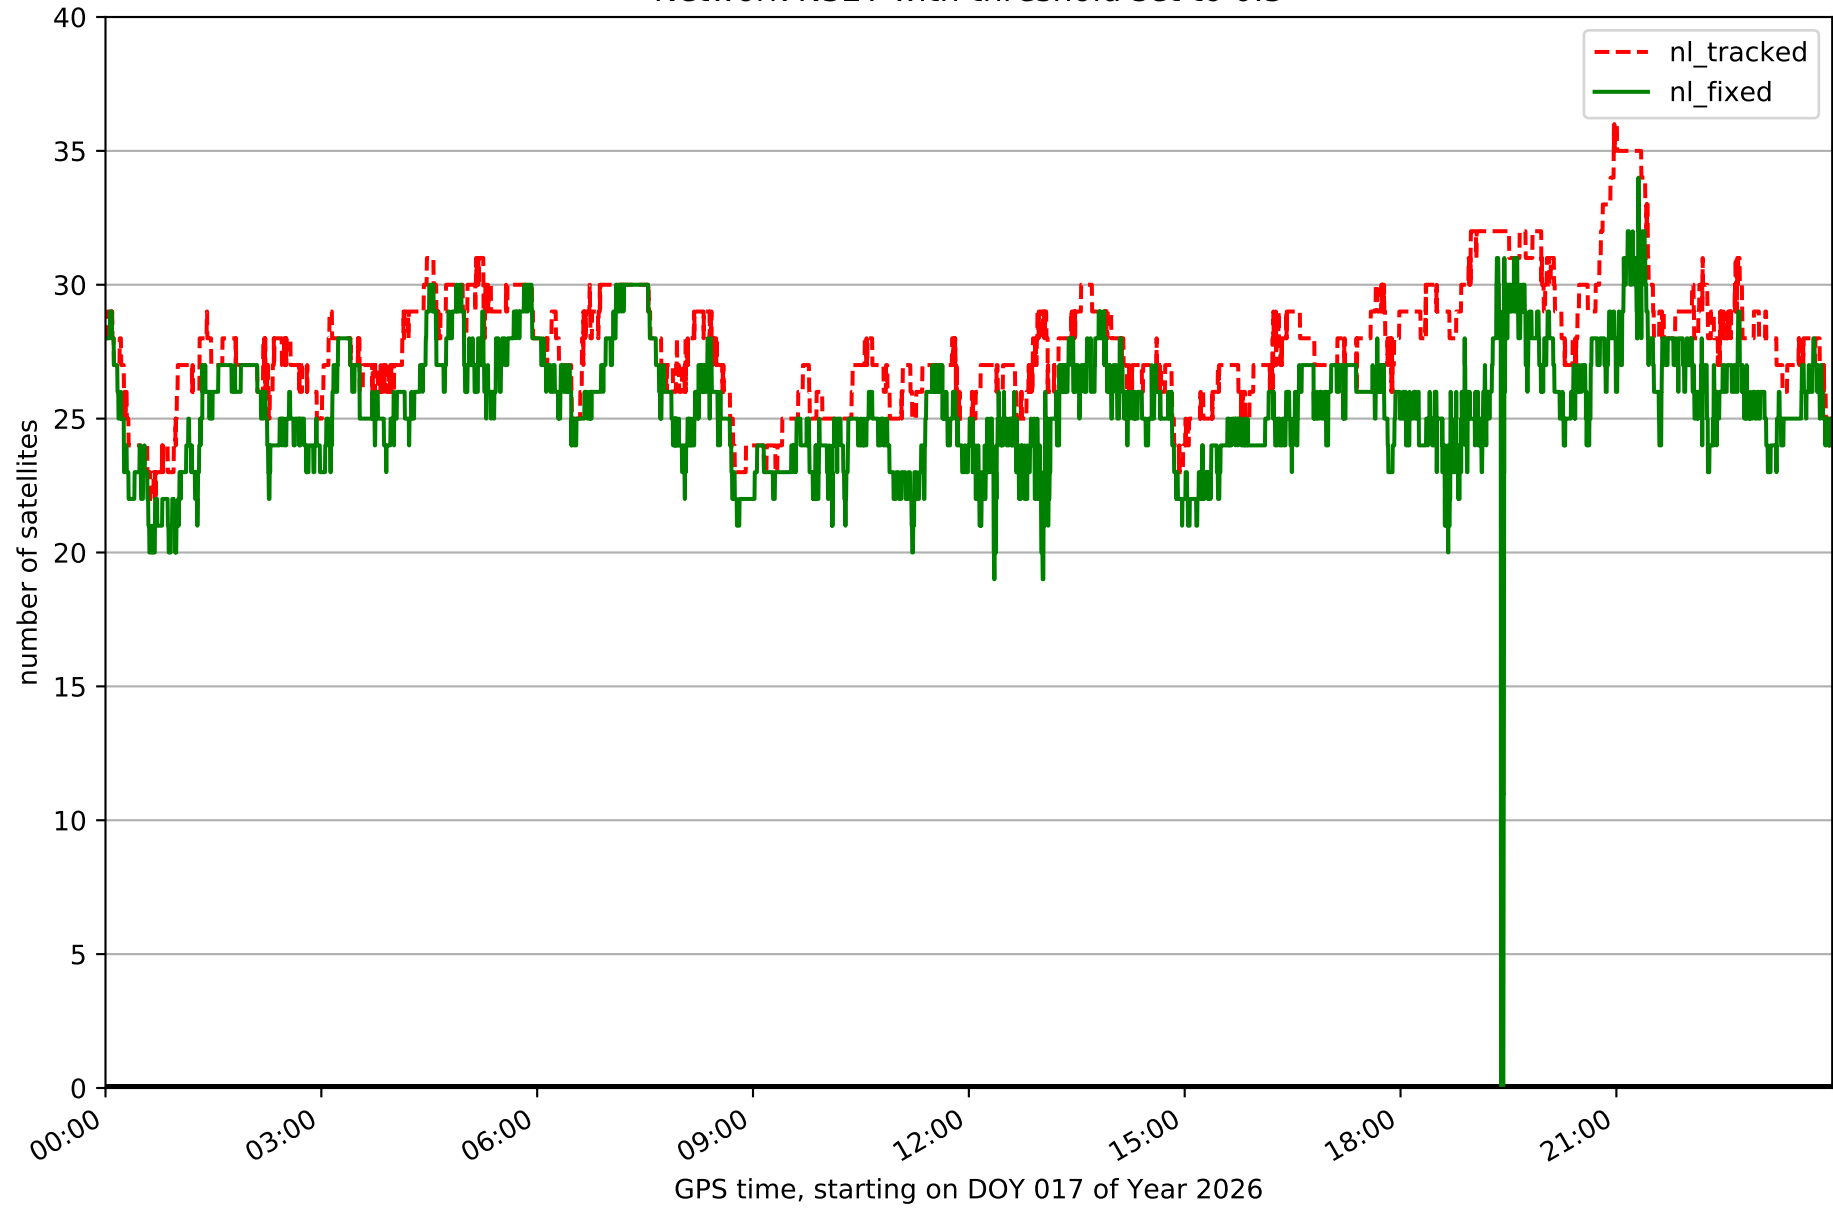


Fixing percentage of satellites in network N32T with threshold set to 0.3

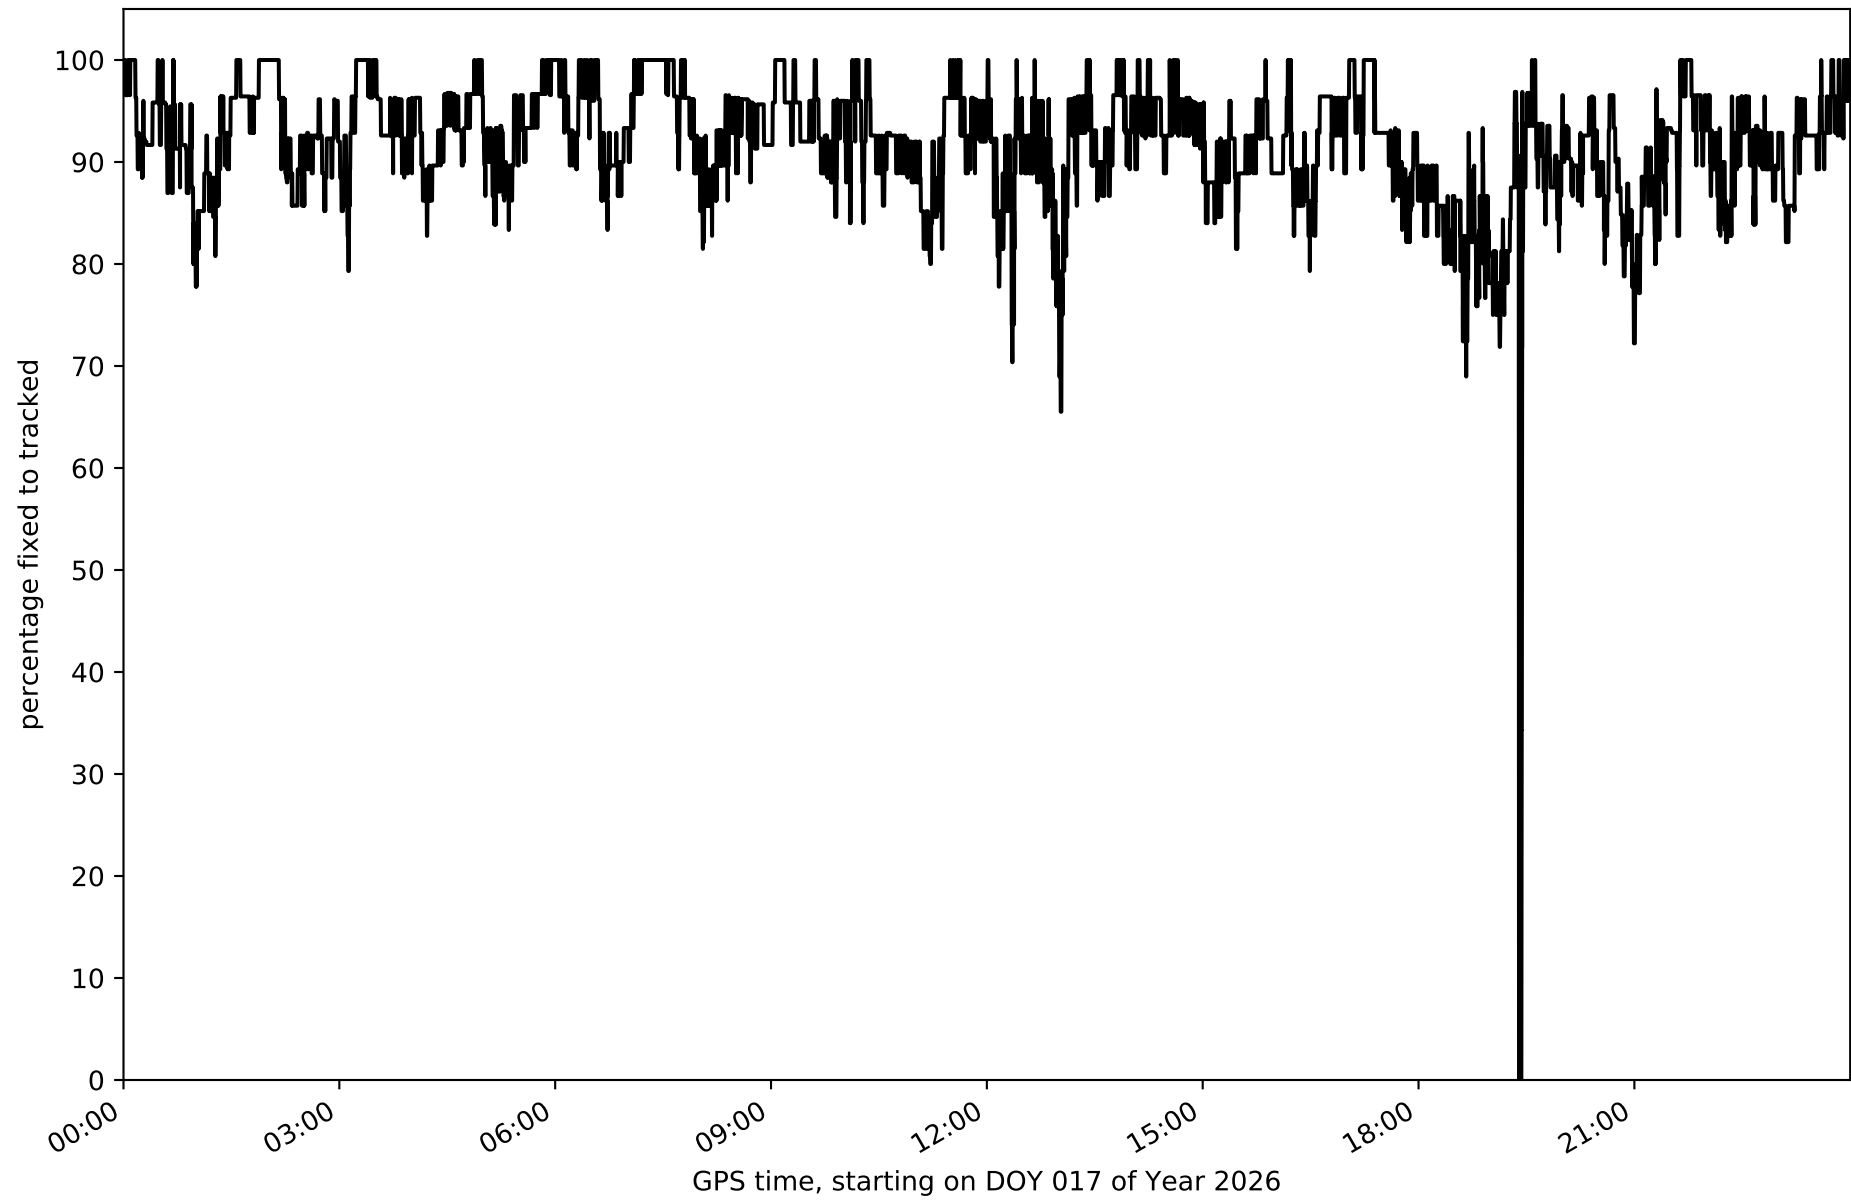


Network N32T - only GPS with threshold set to 0.3

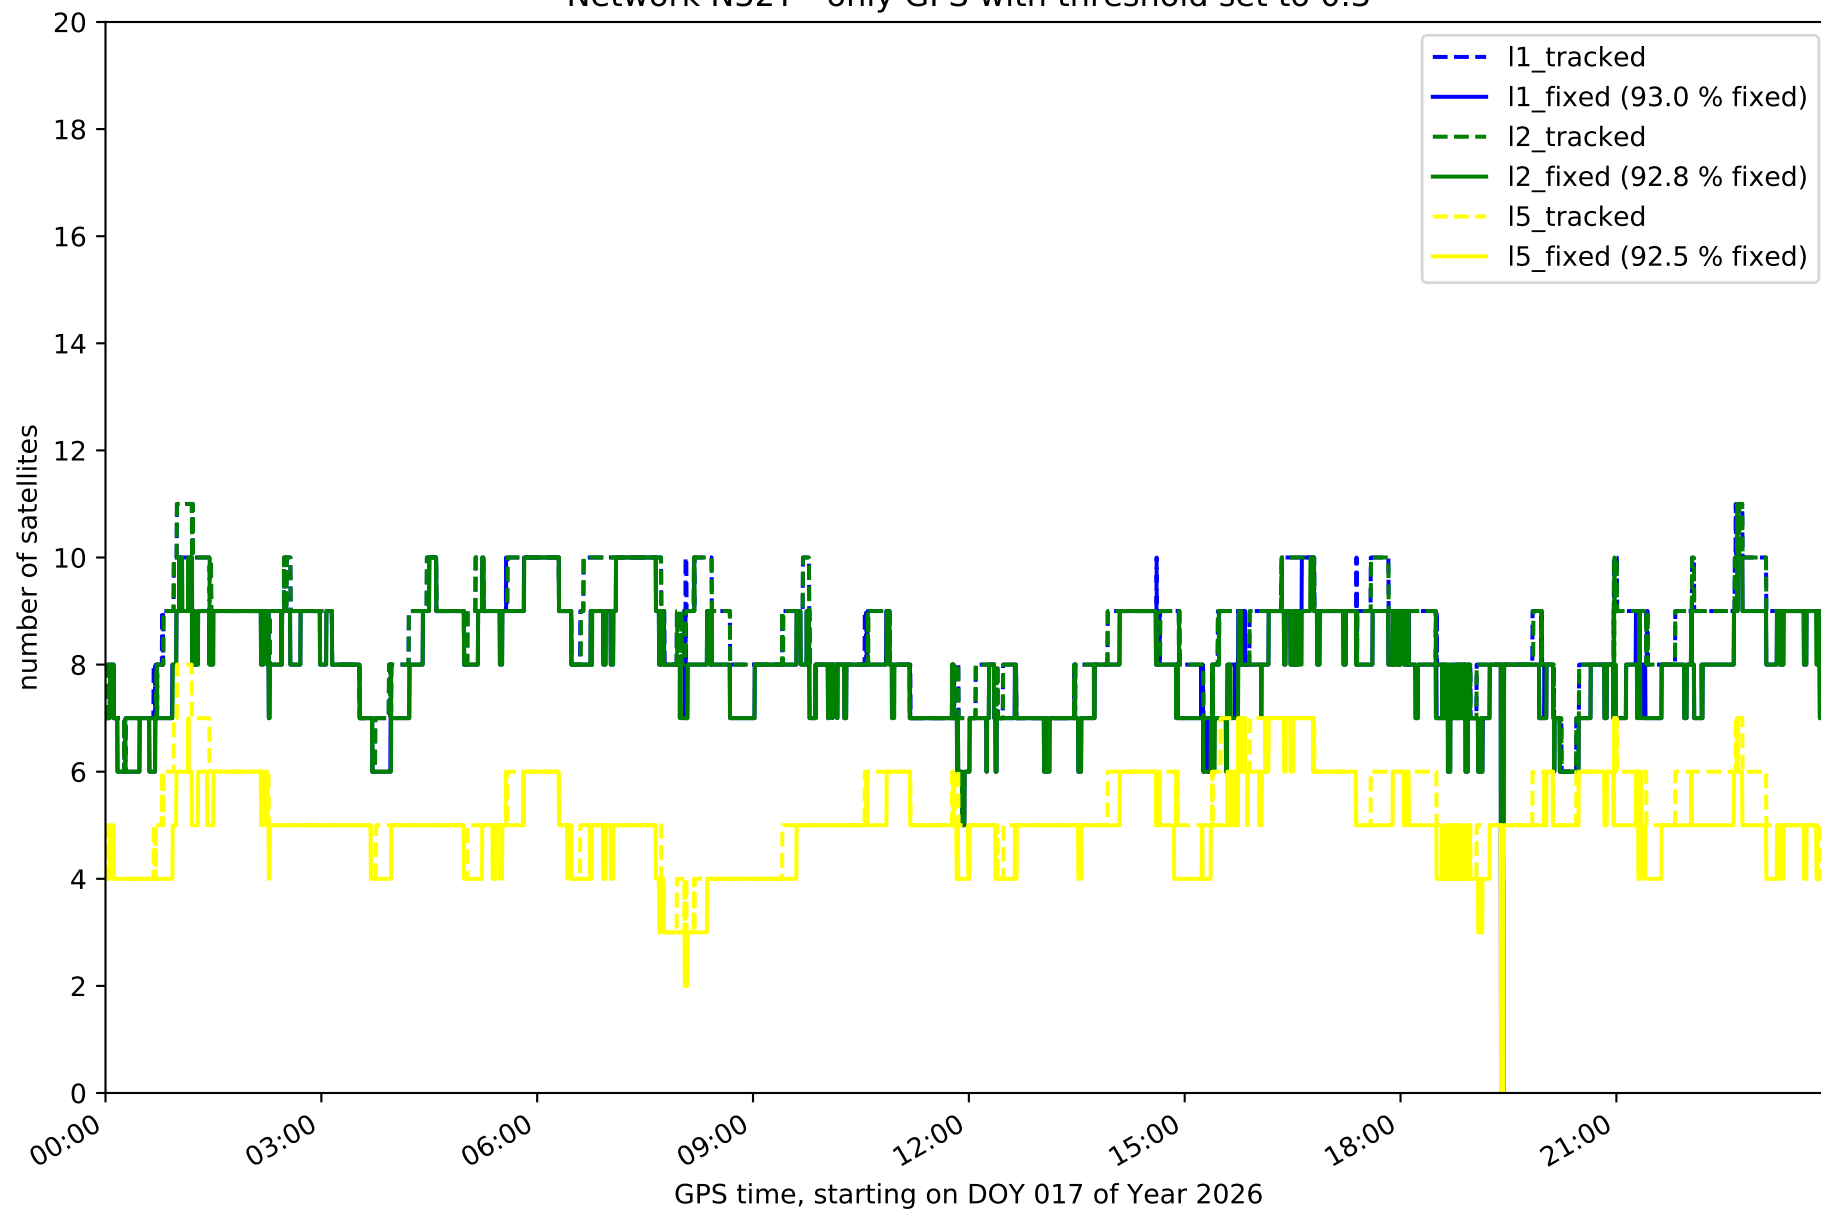


Network N32T - only GLONASS with threshold set to 0.3

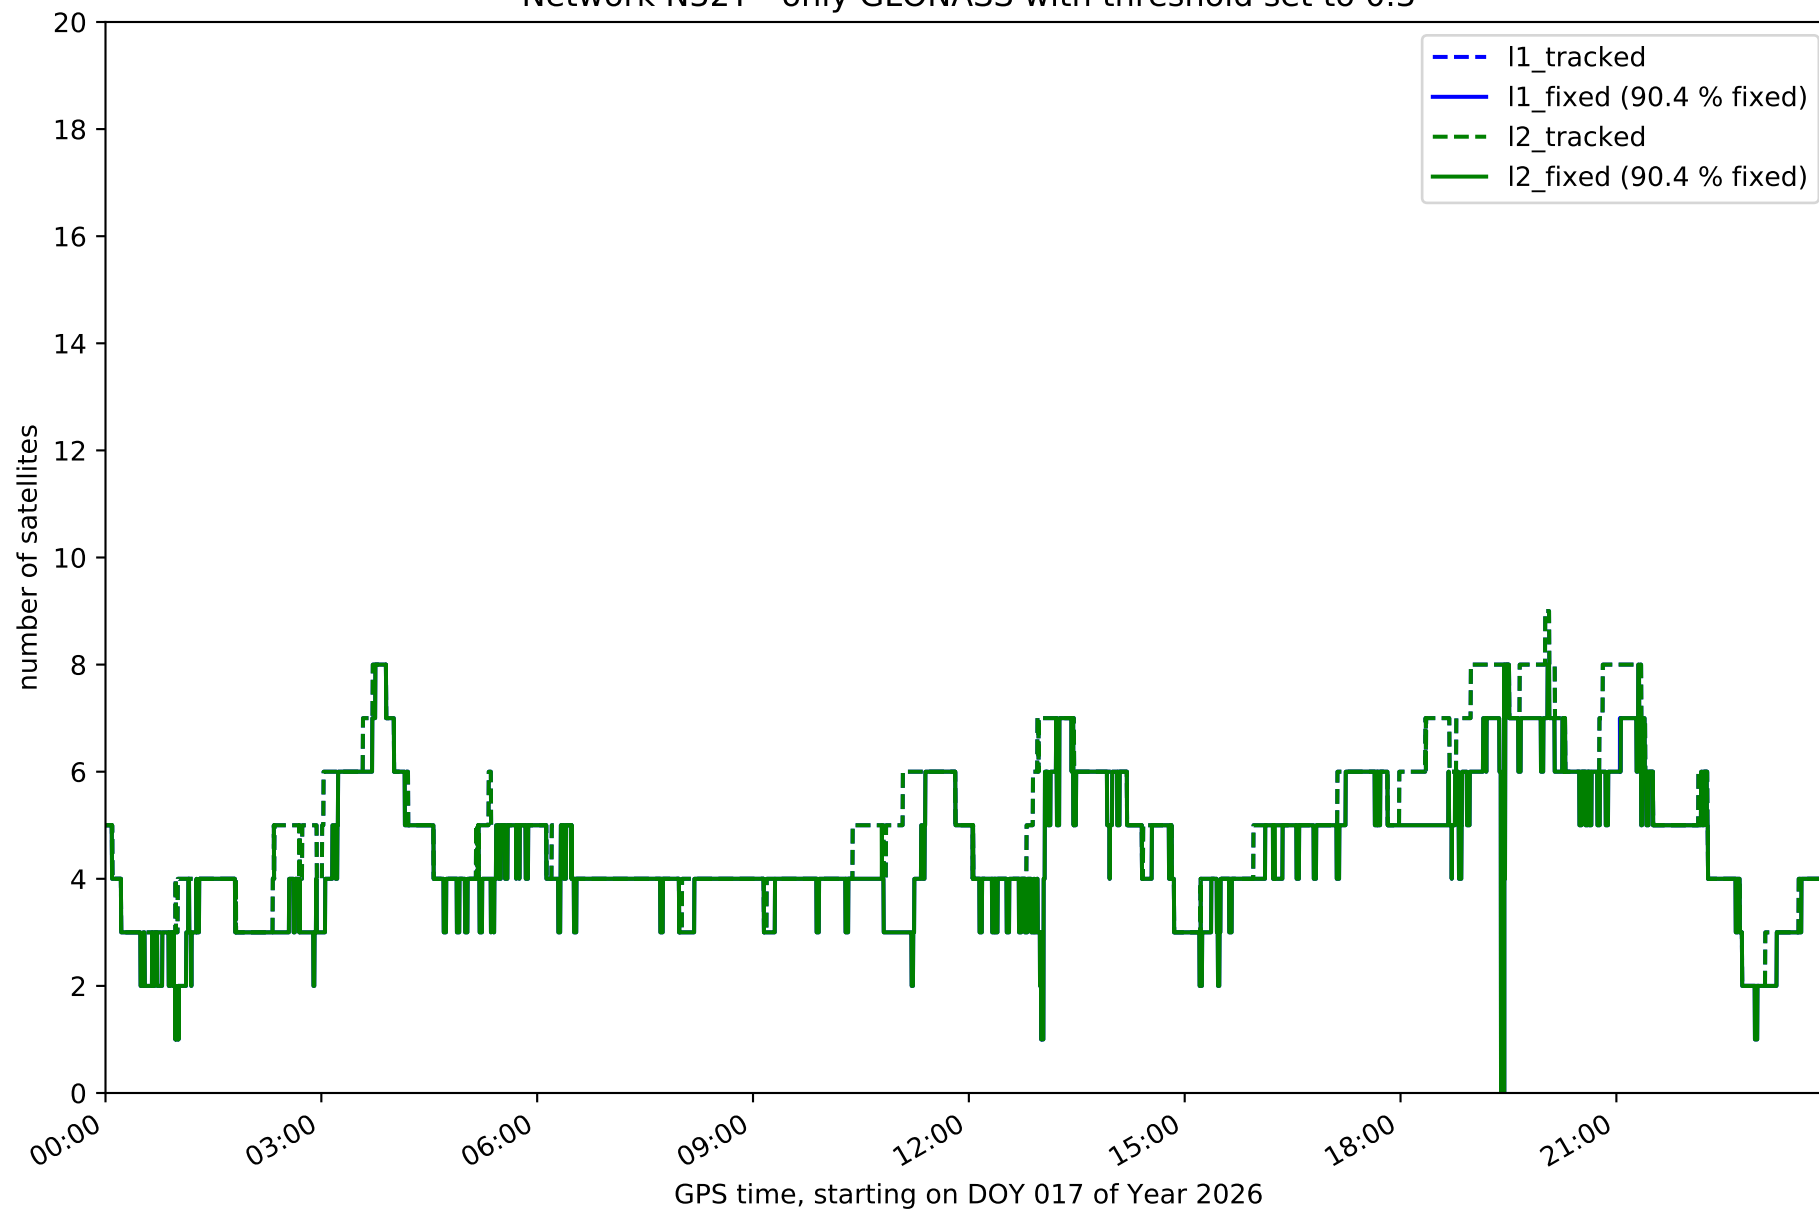


Network N32T - only BDS with threshold set to 0.3

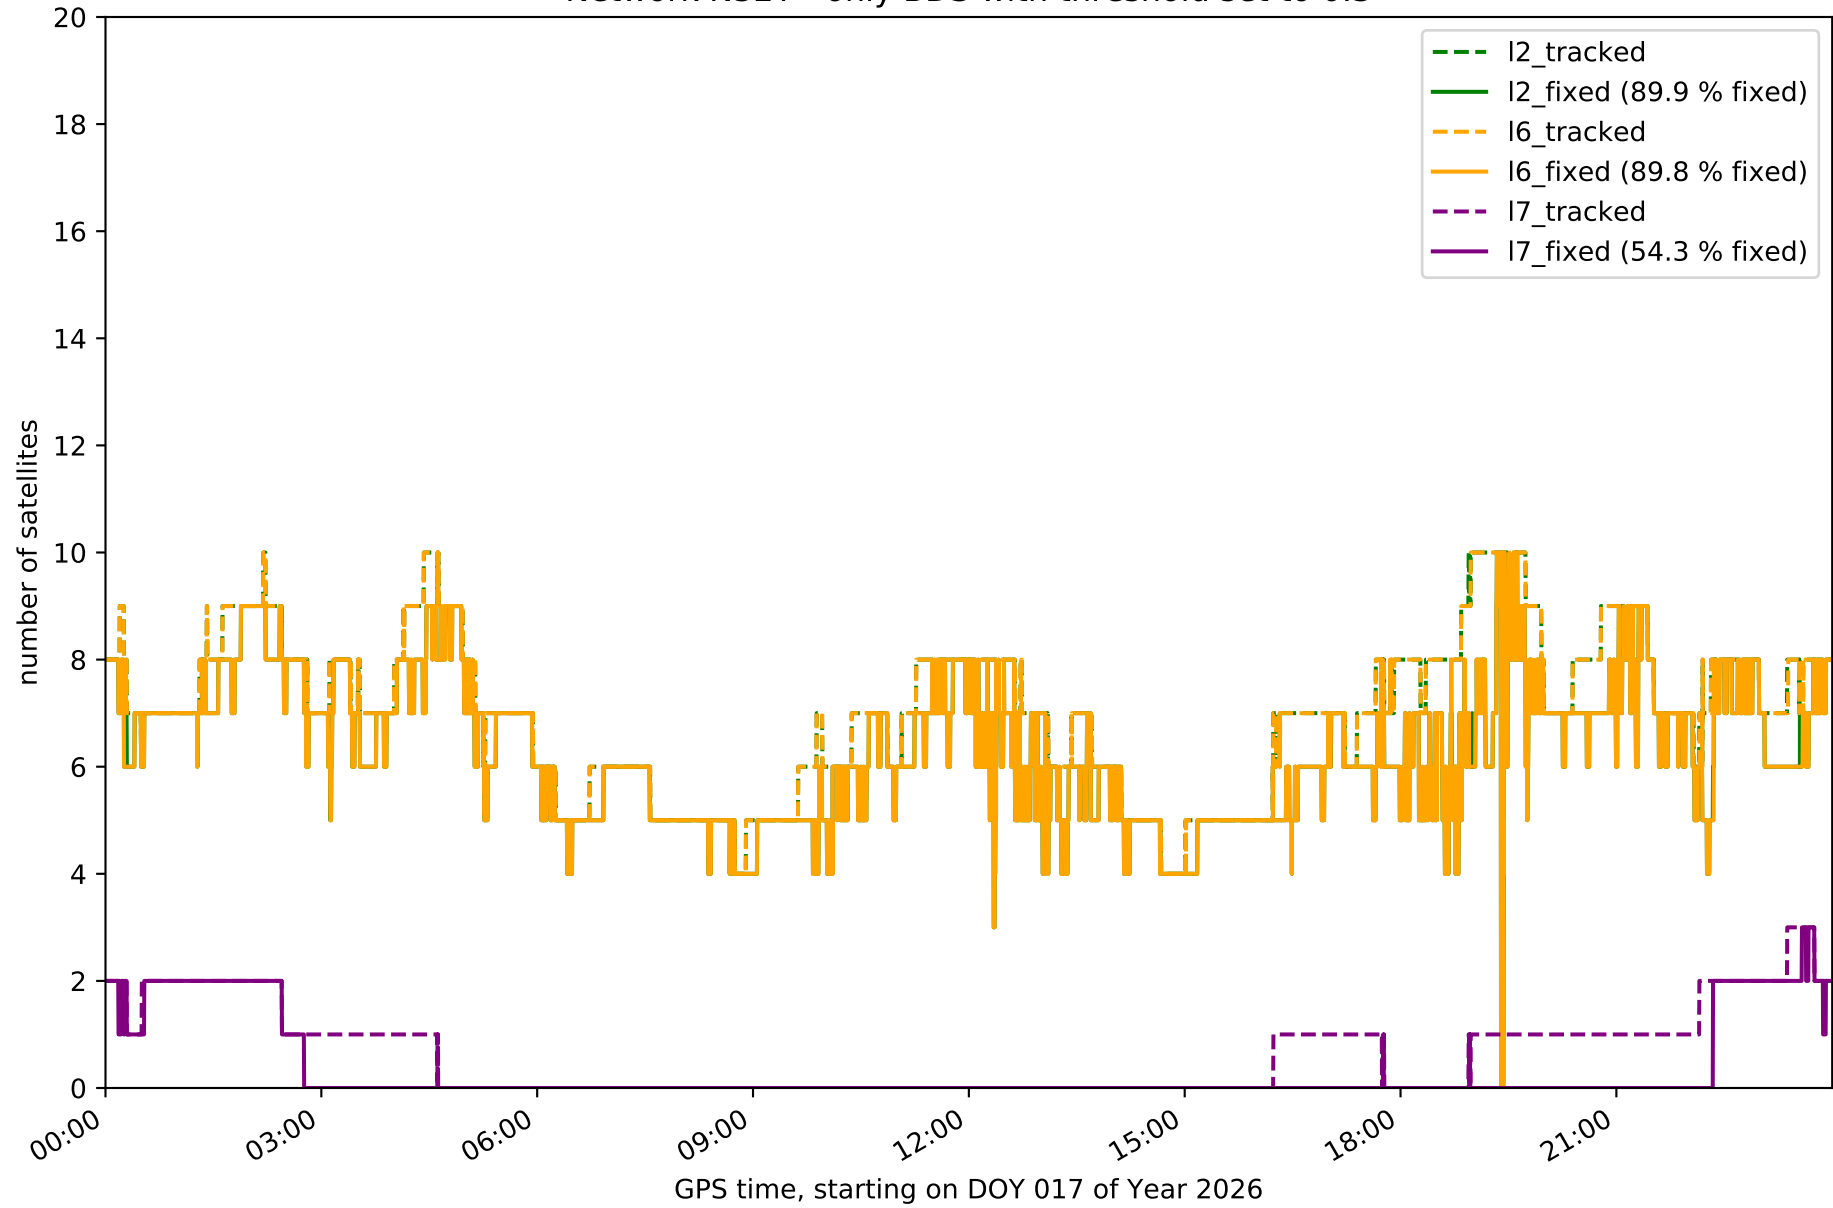


Network N32T - only Galileo with threshold set to 0.3

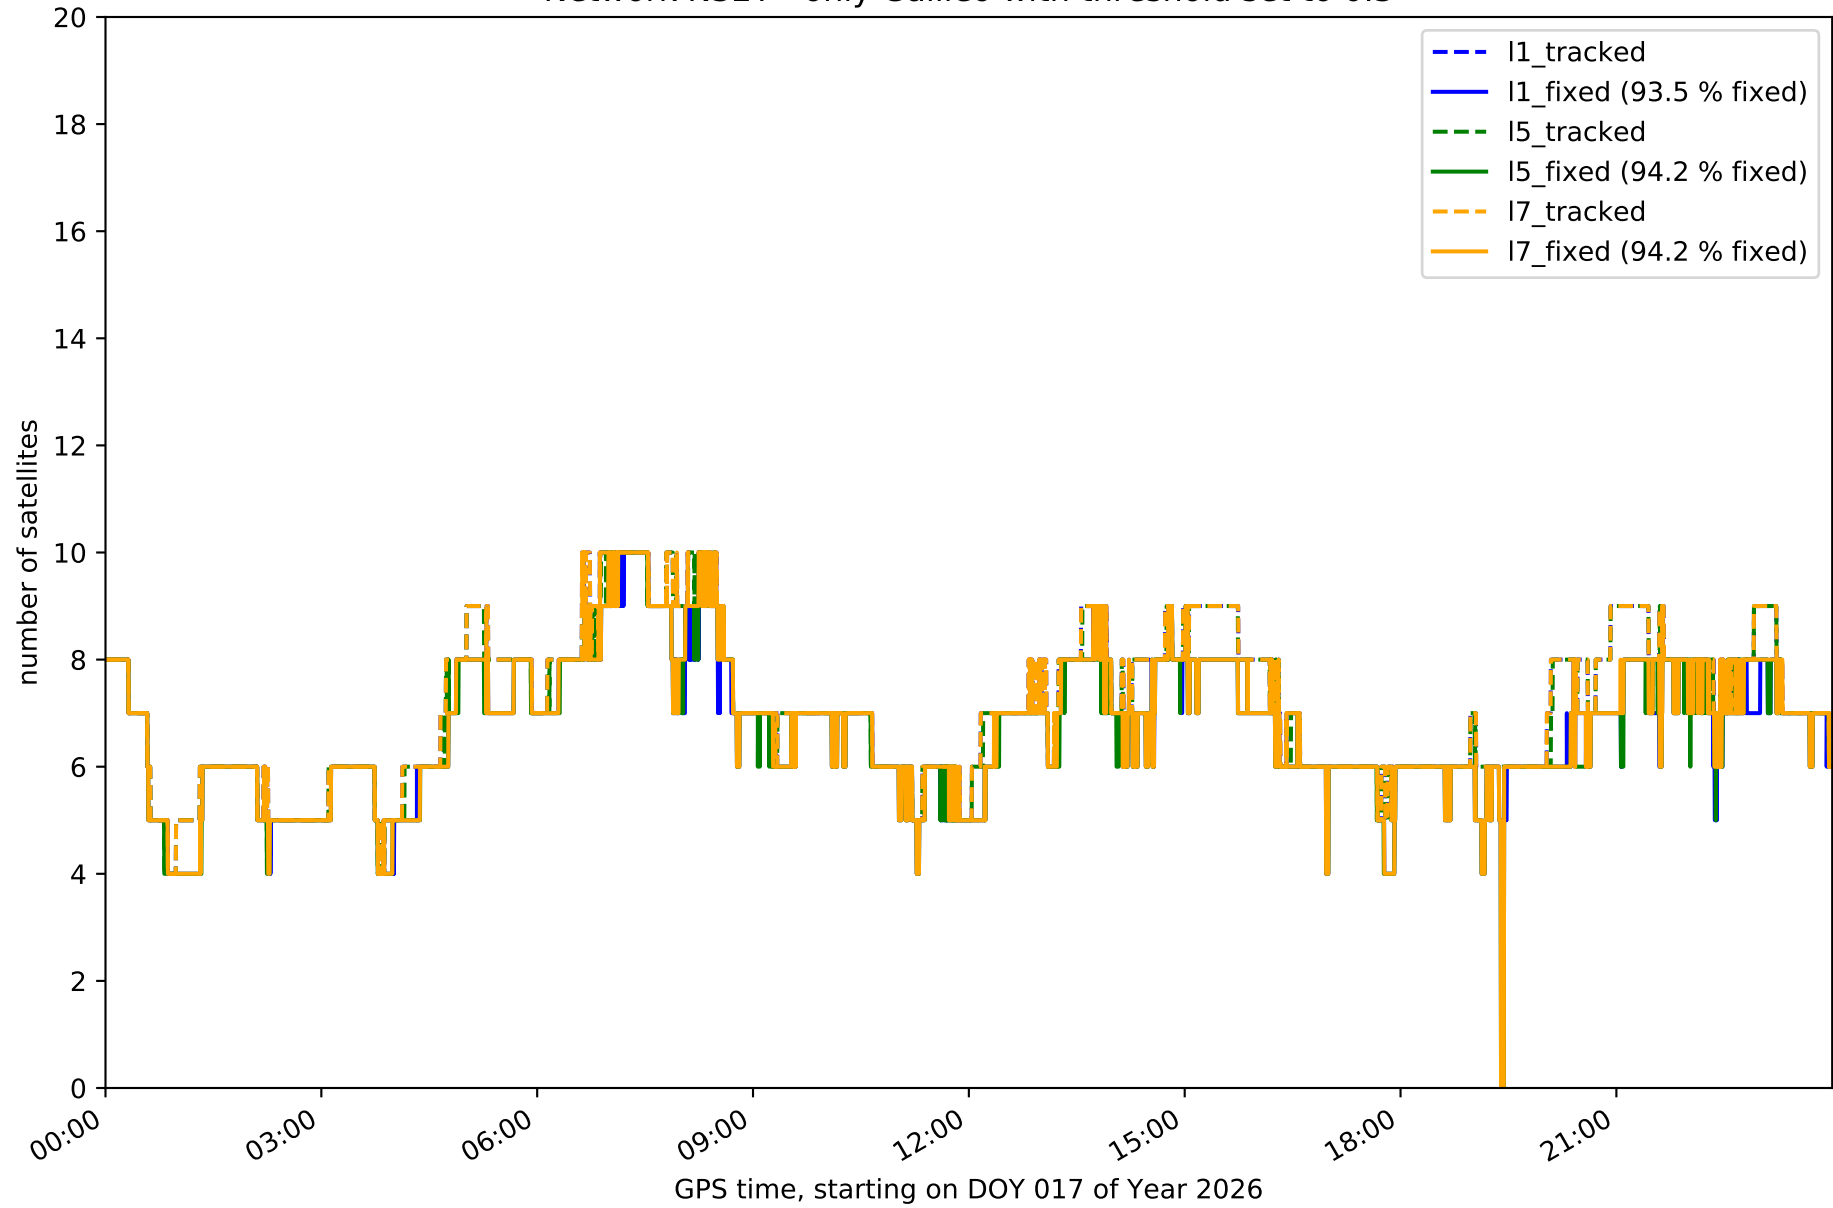


Station EH01 in network N32T

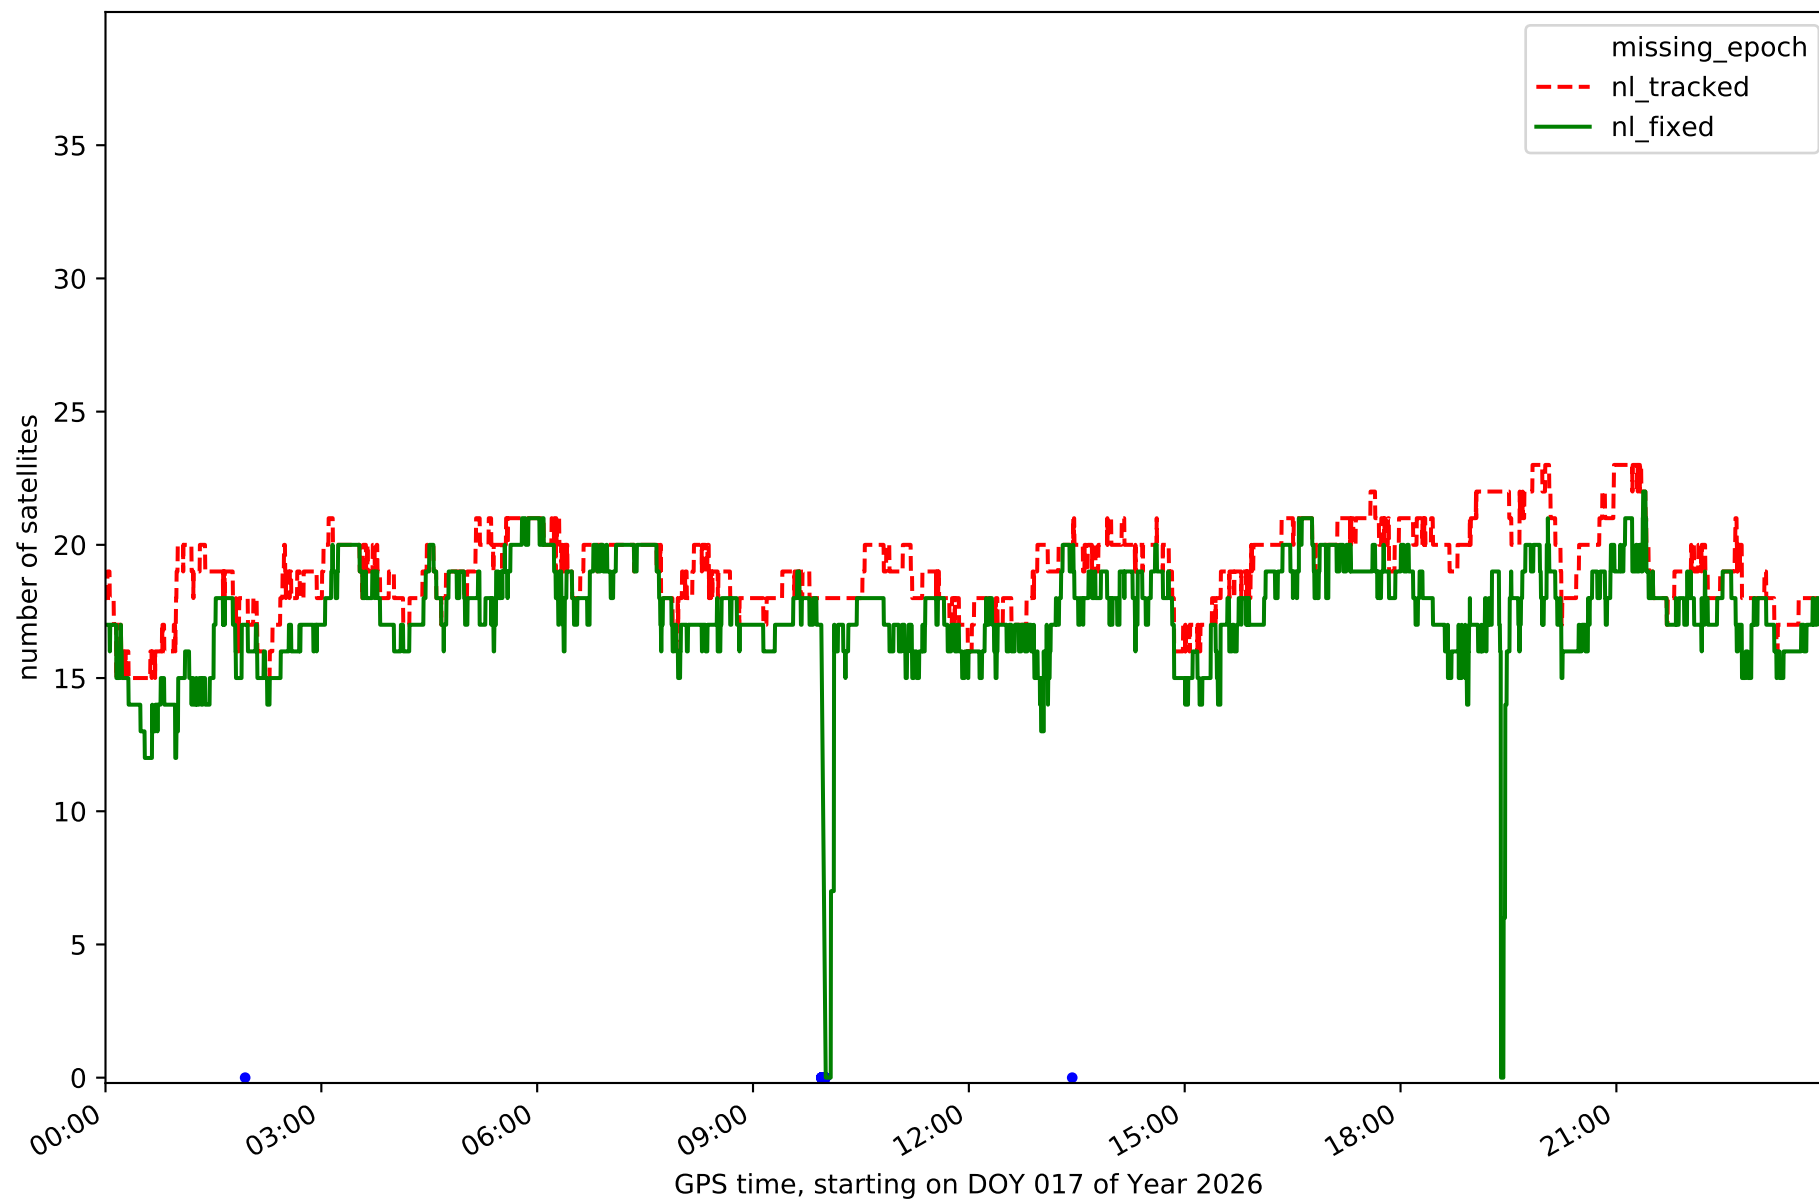


Station EH02 in network N32T

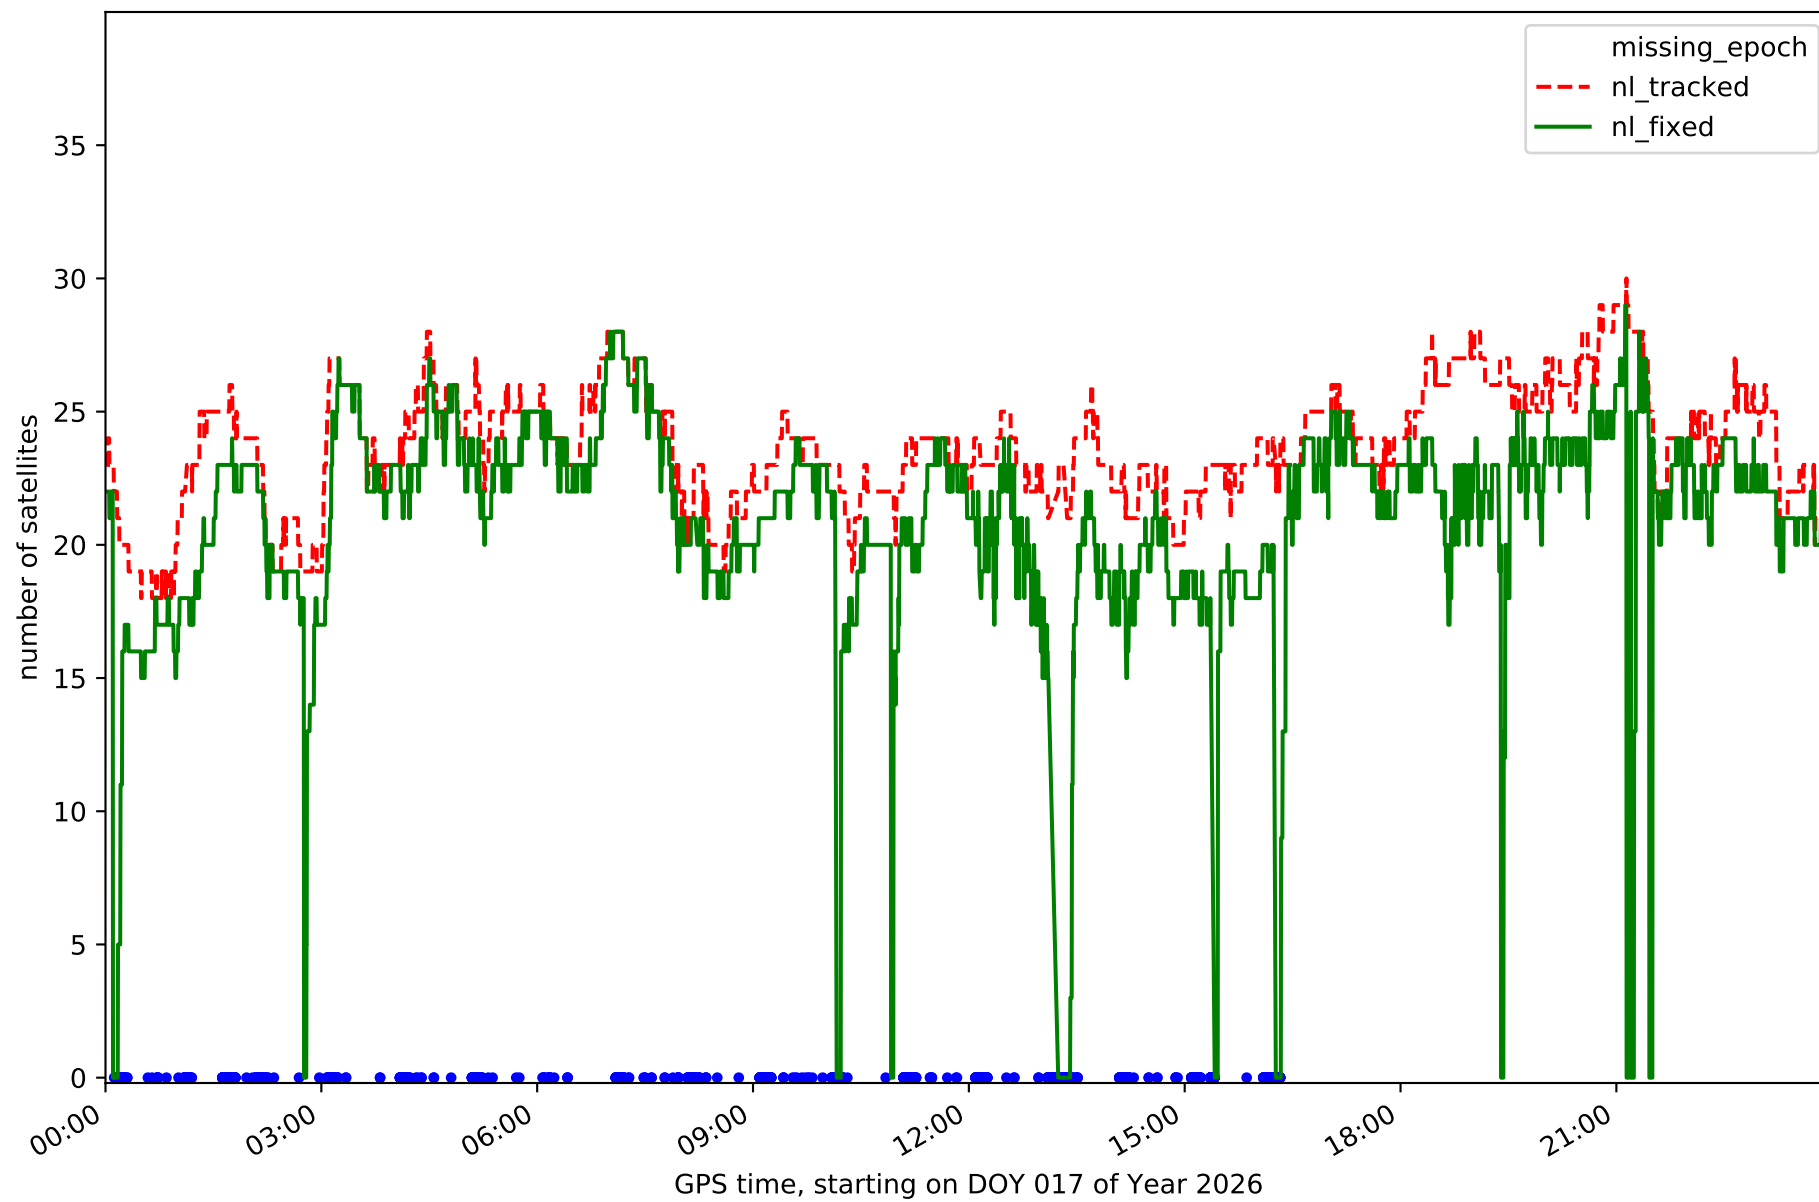


Station GOM1 in network N32T

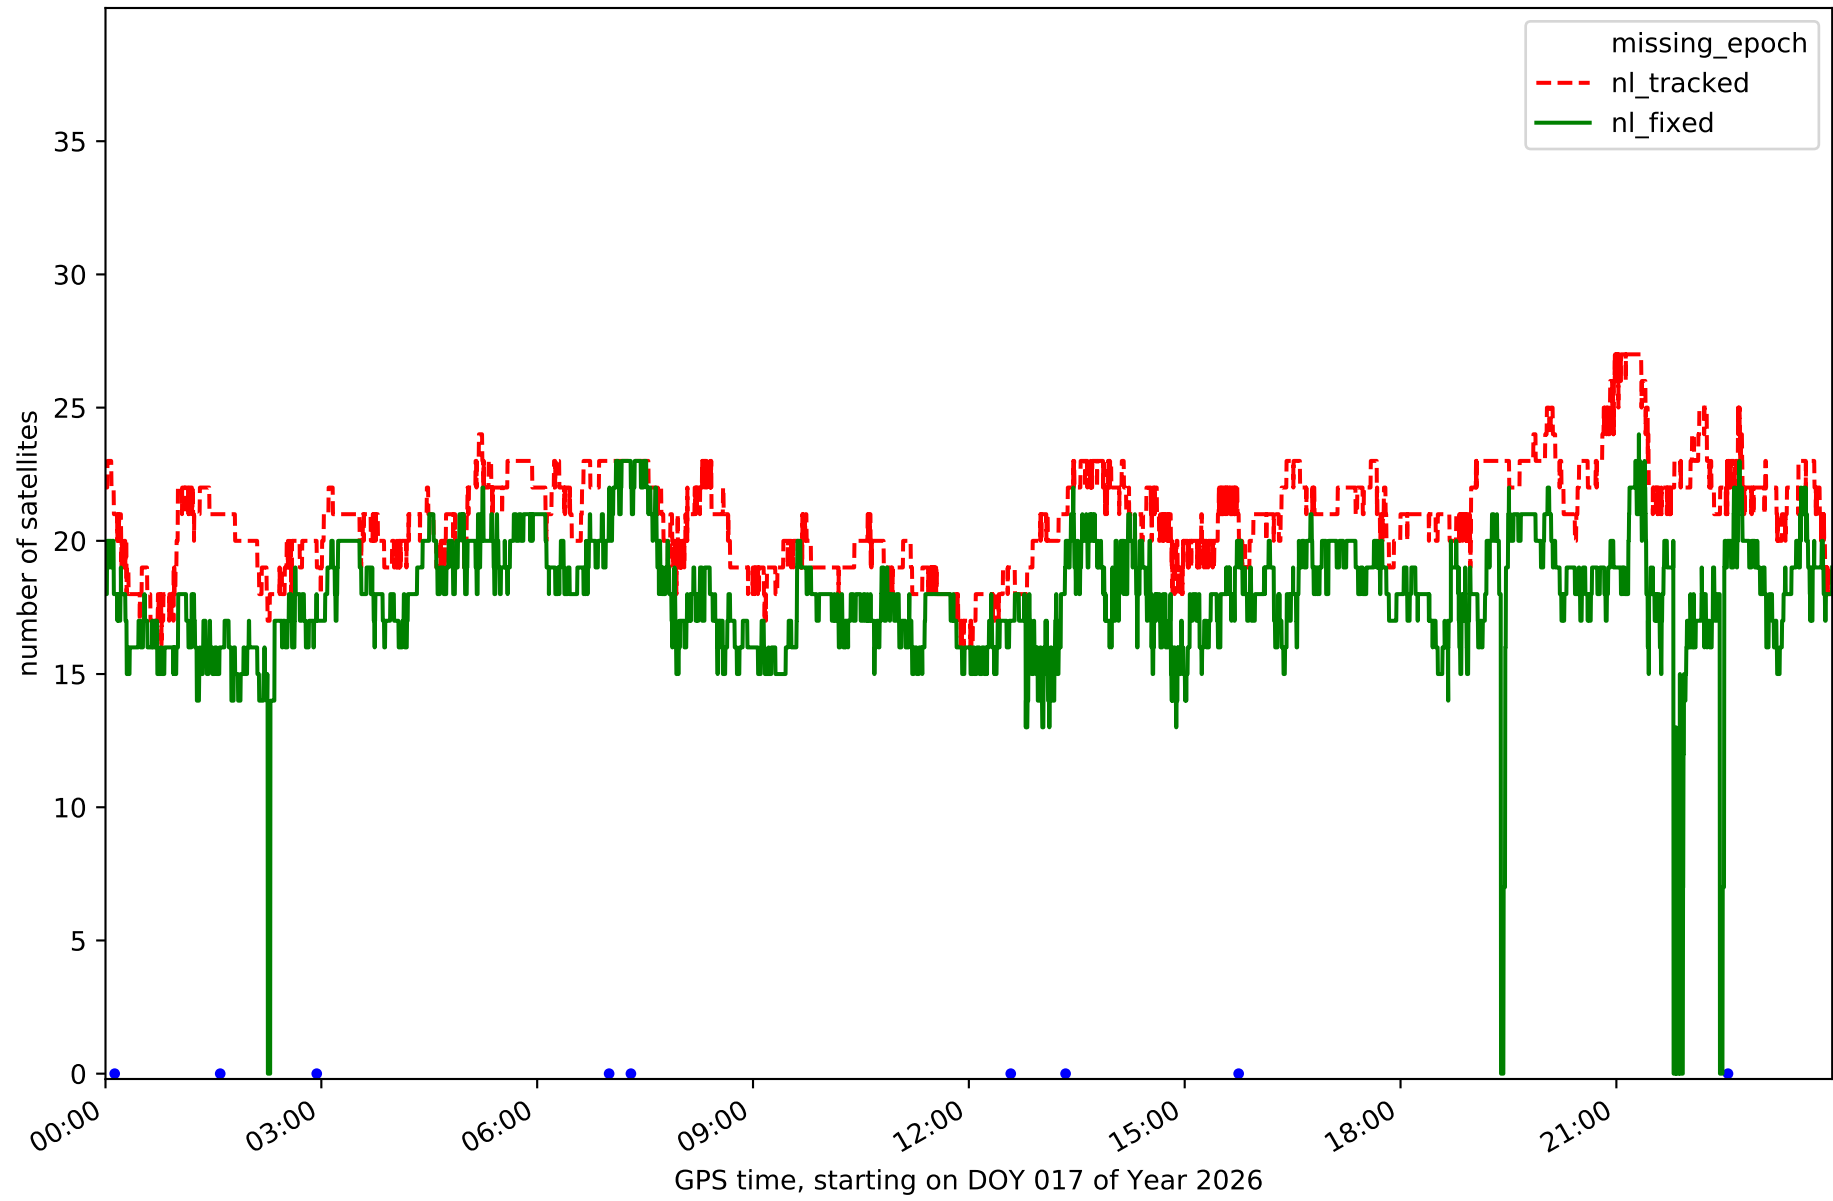


Station GOME in network N32T

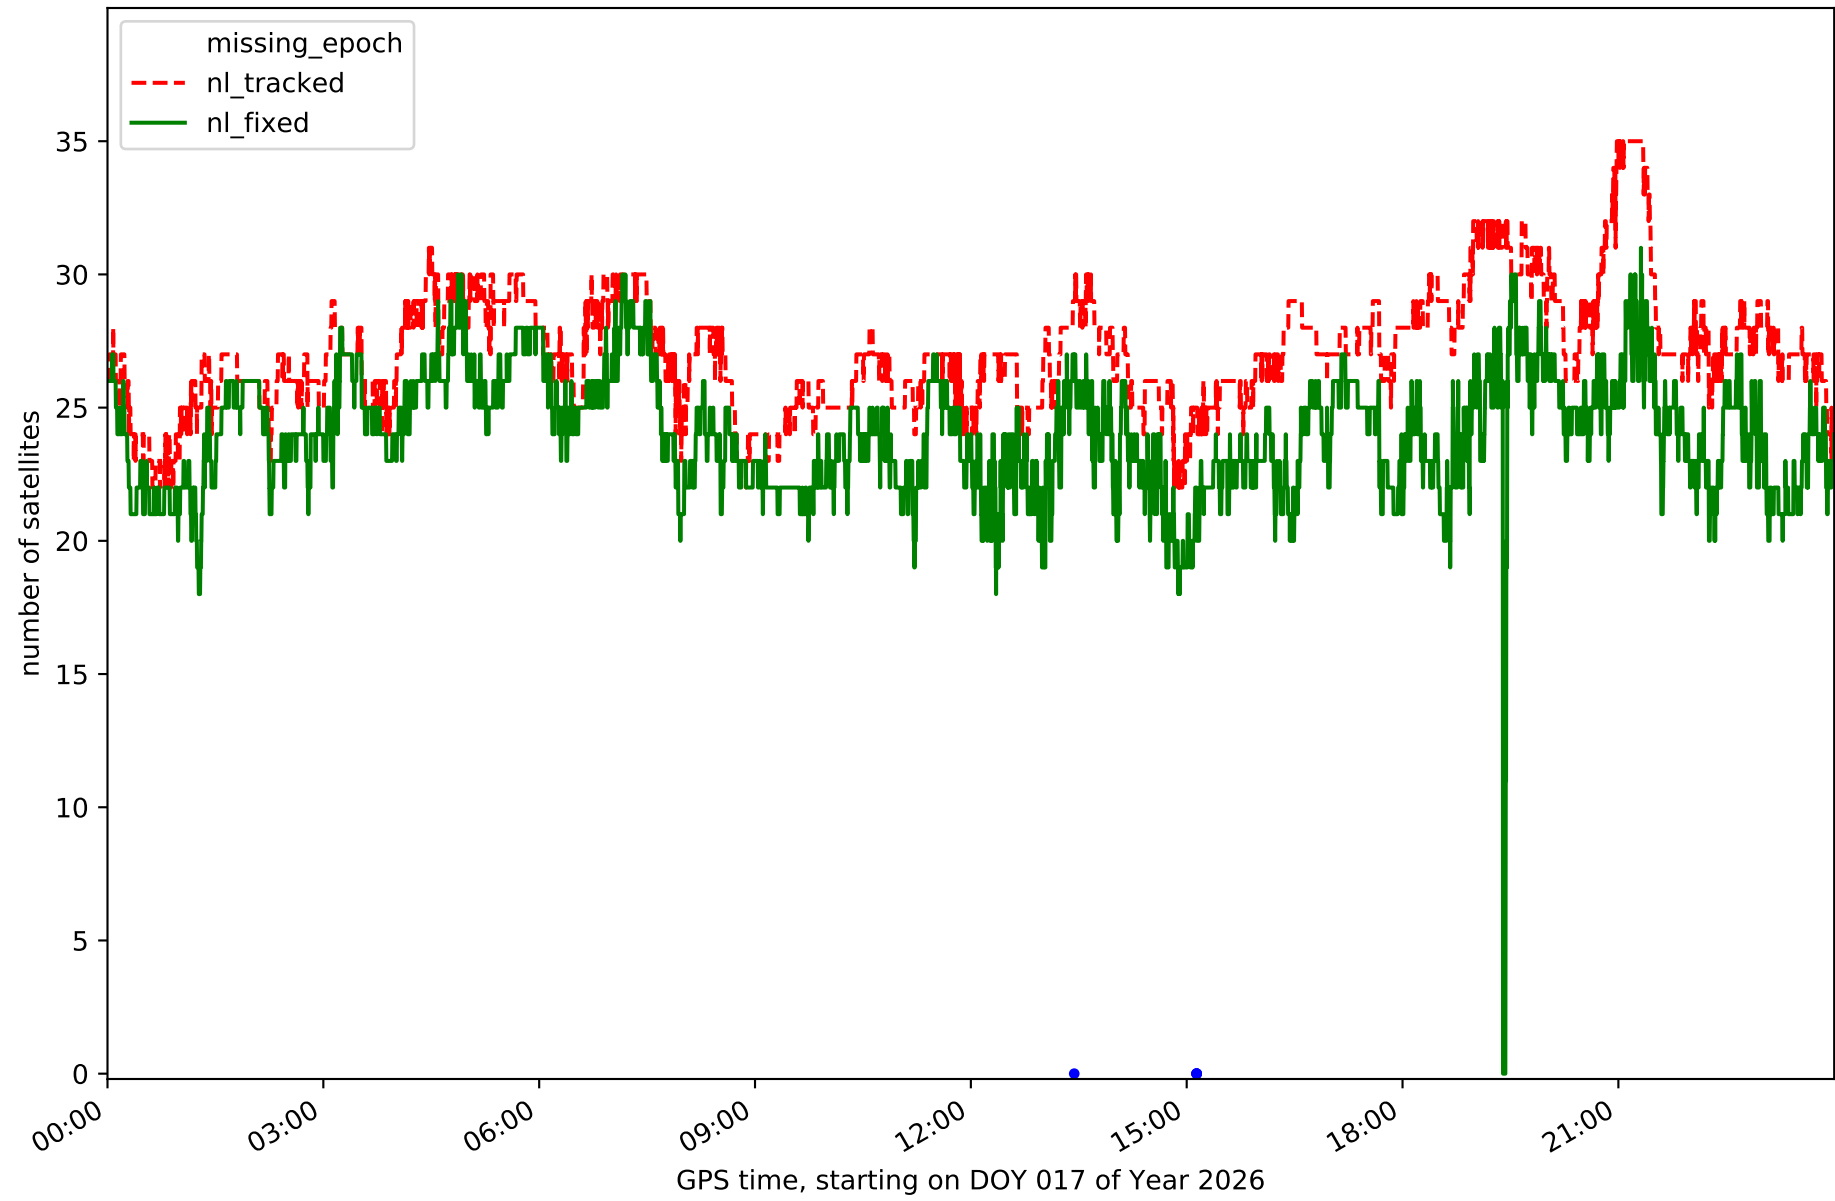


Station IZAN in network N32T

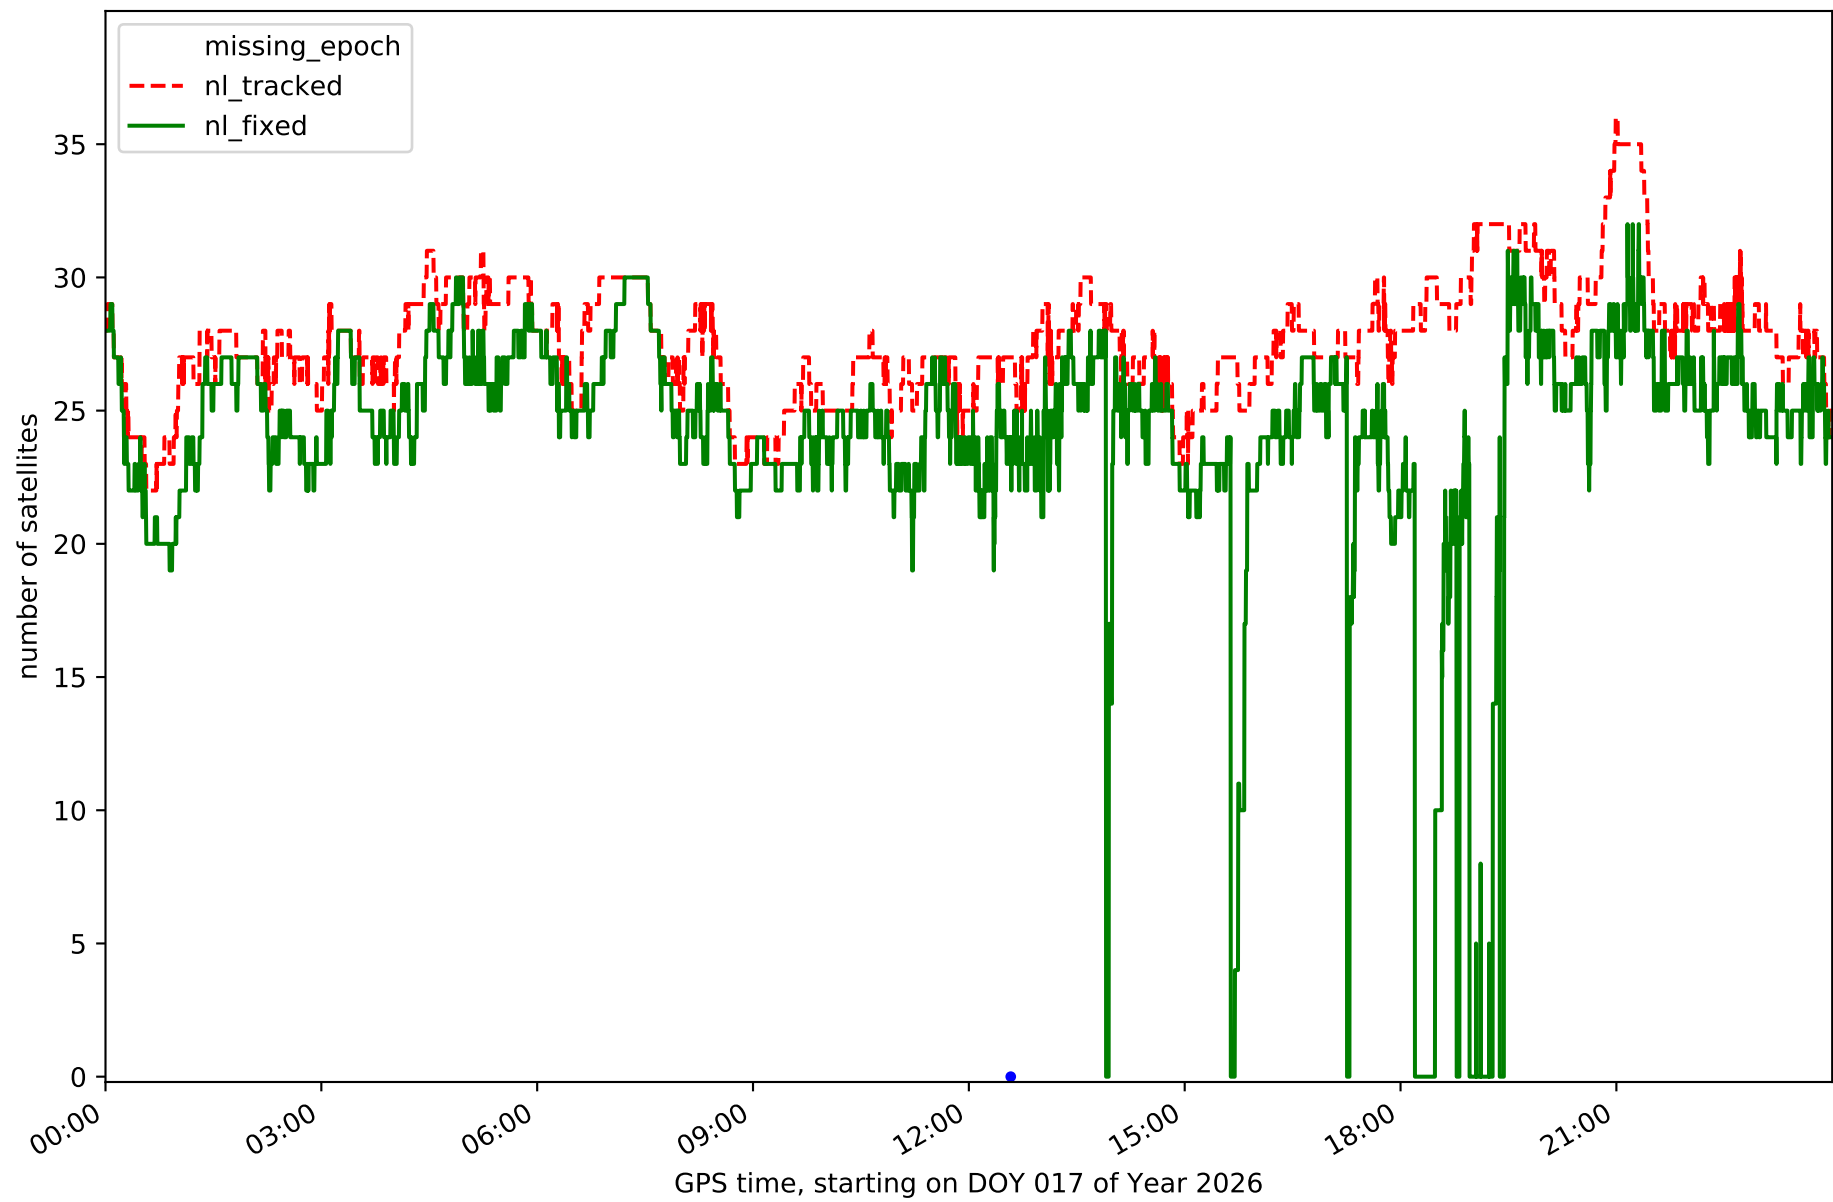


Station LP01 in network N32T

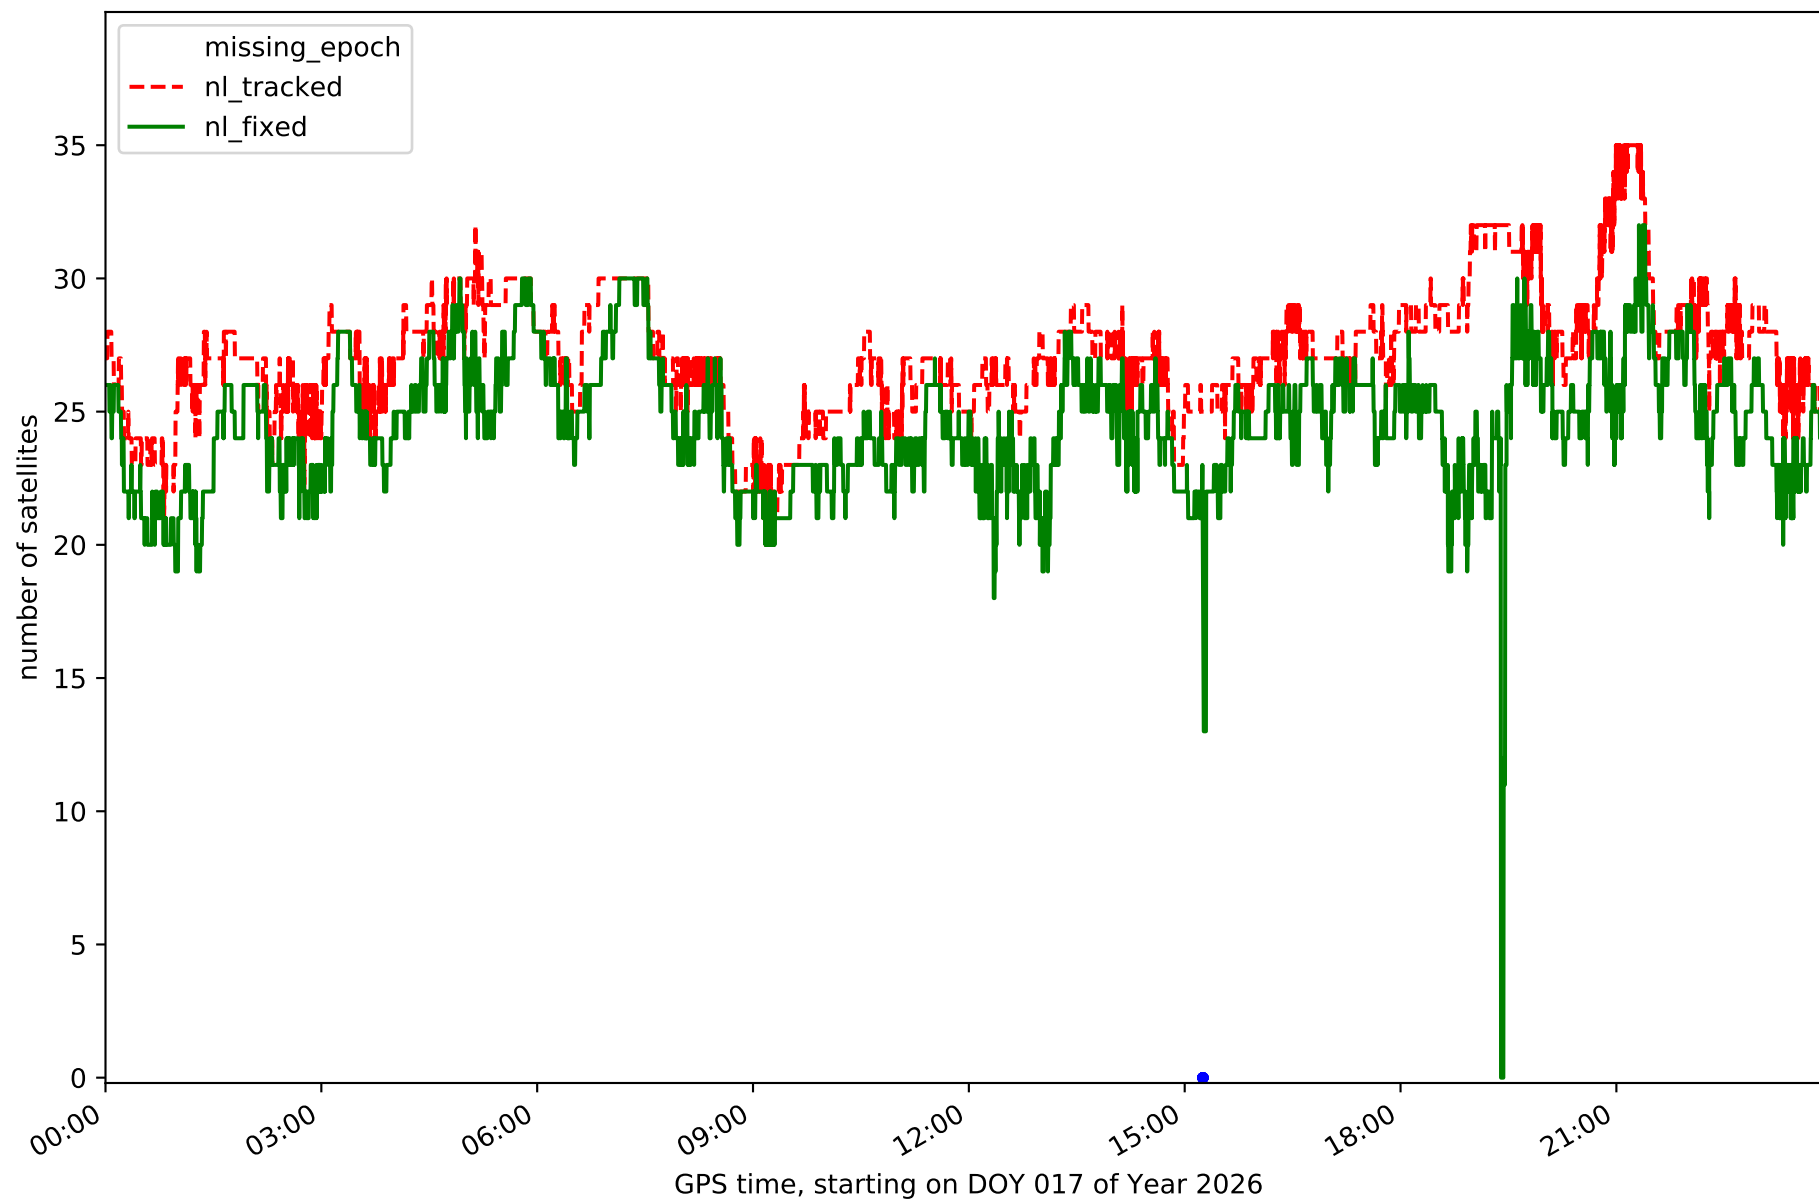


Station LP03 in network N32T

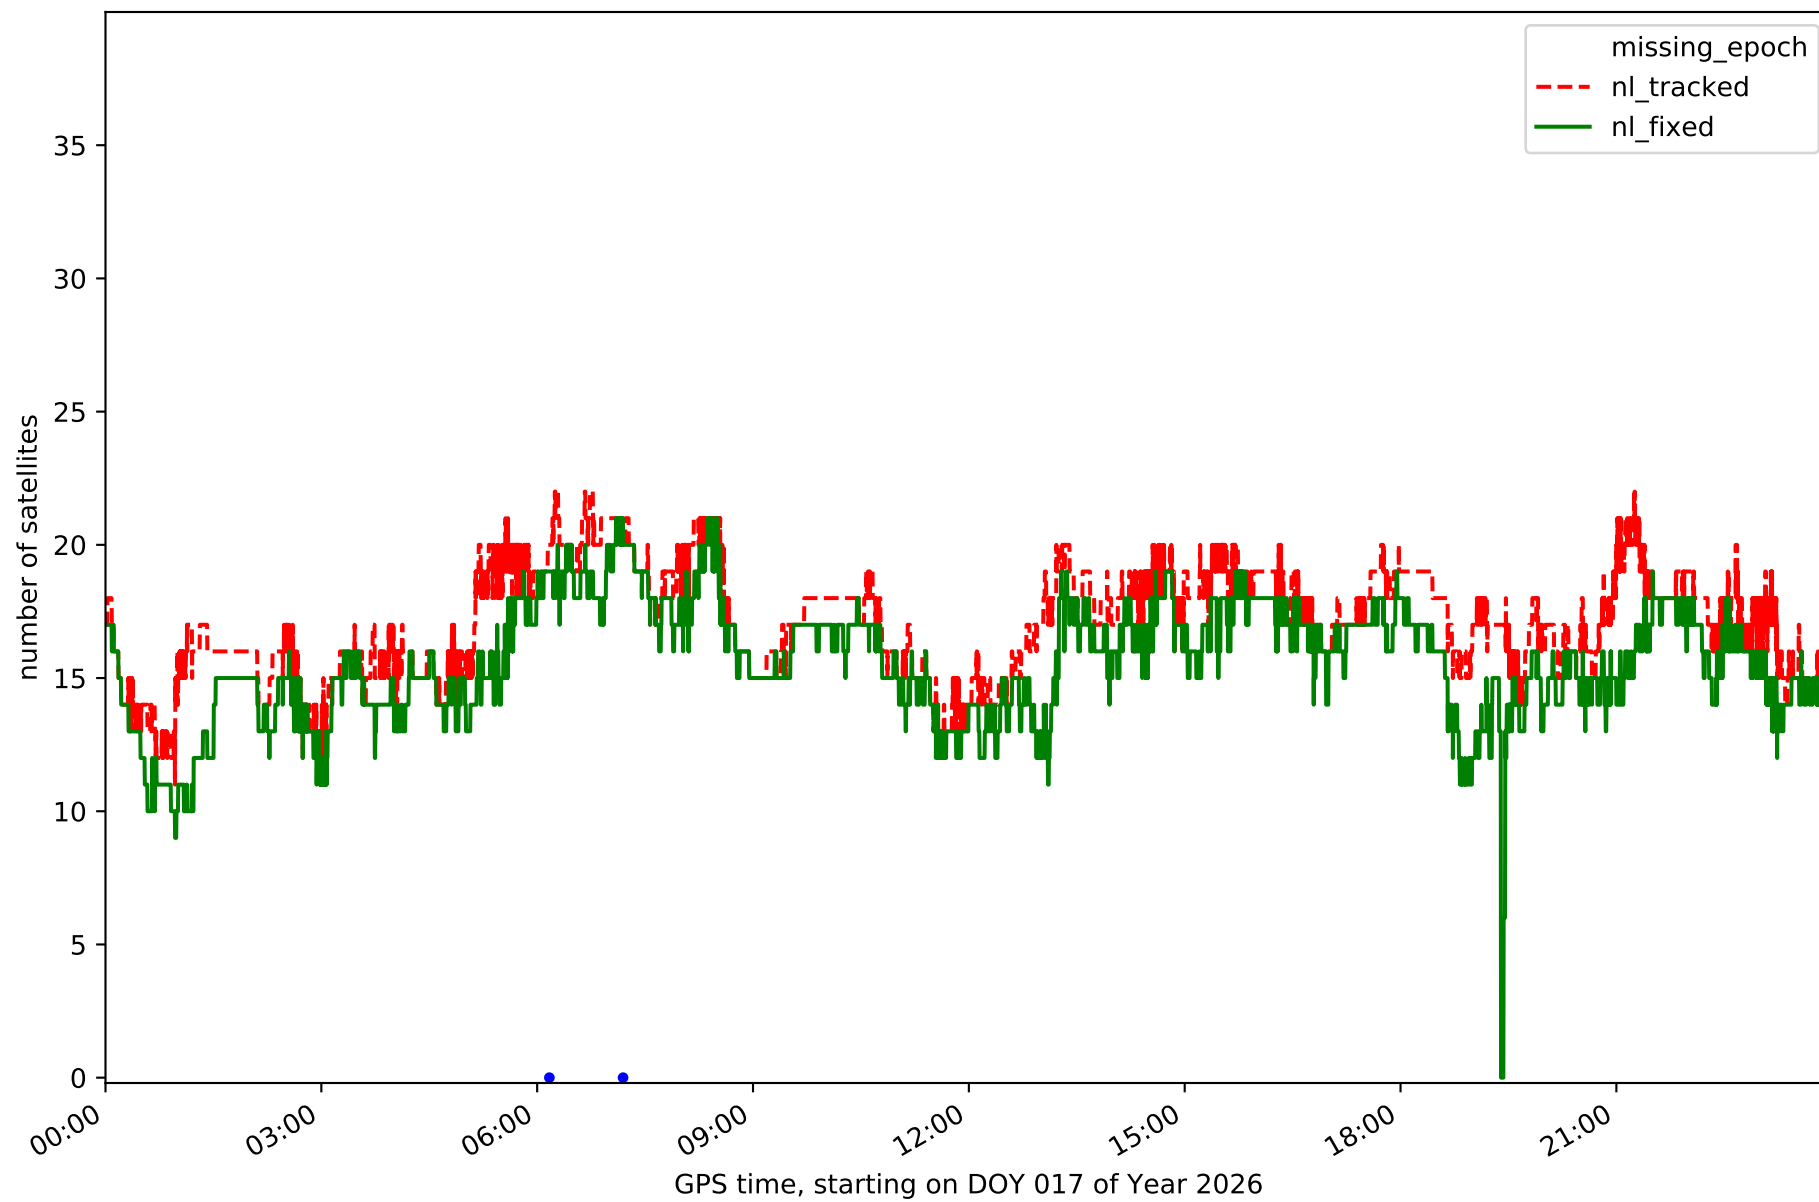


Station LPAL in network N32T

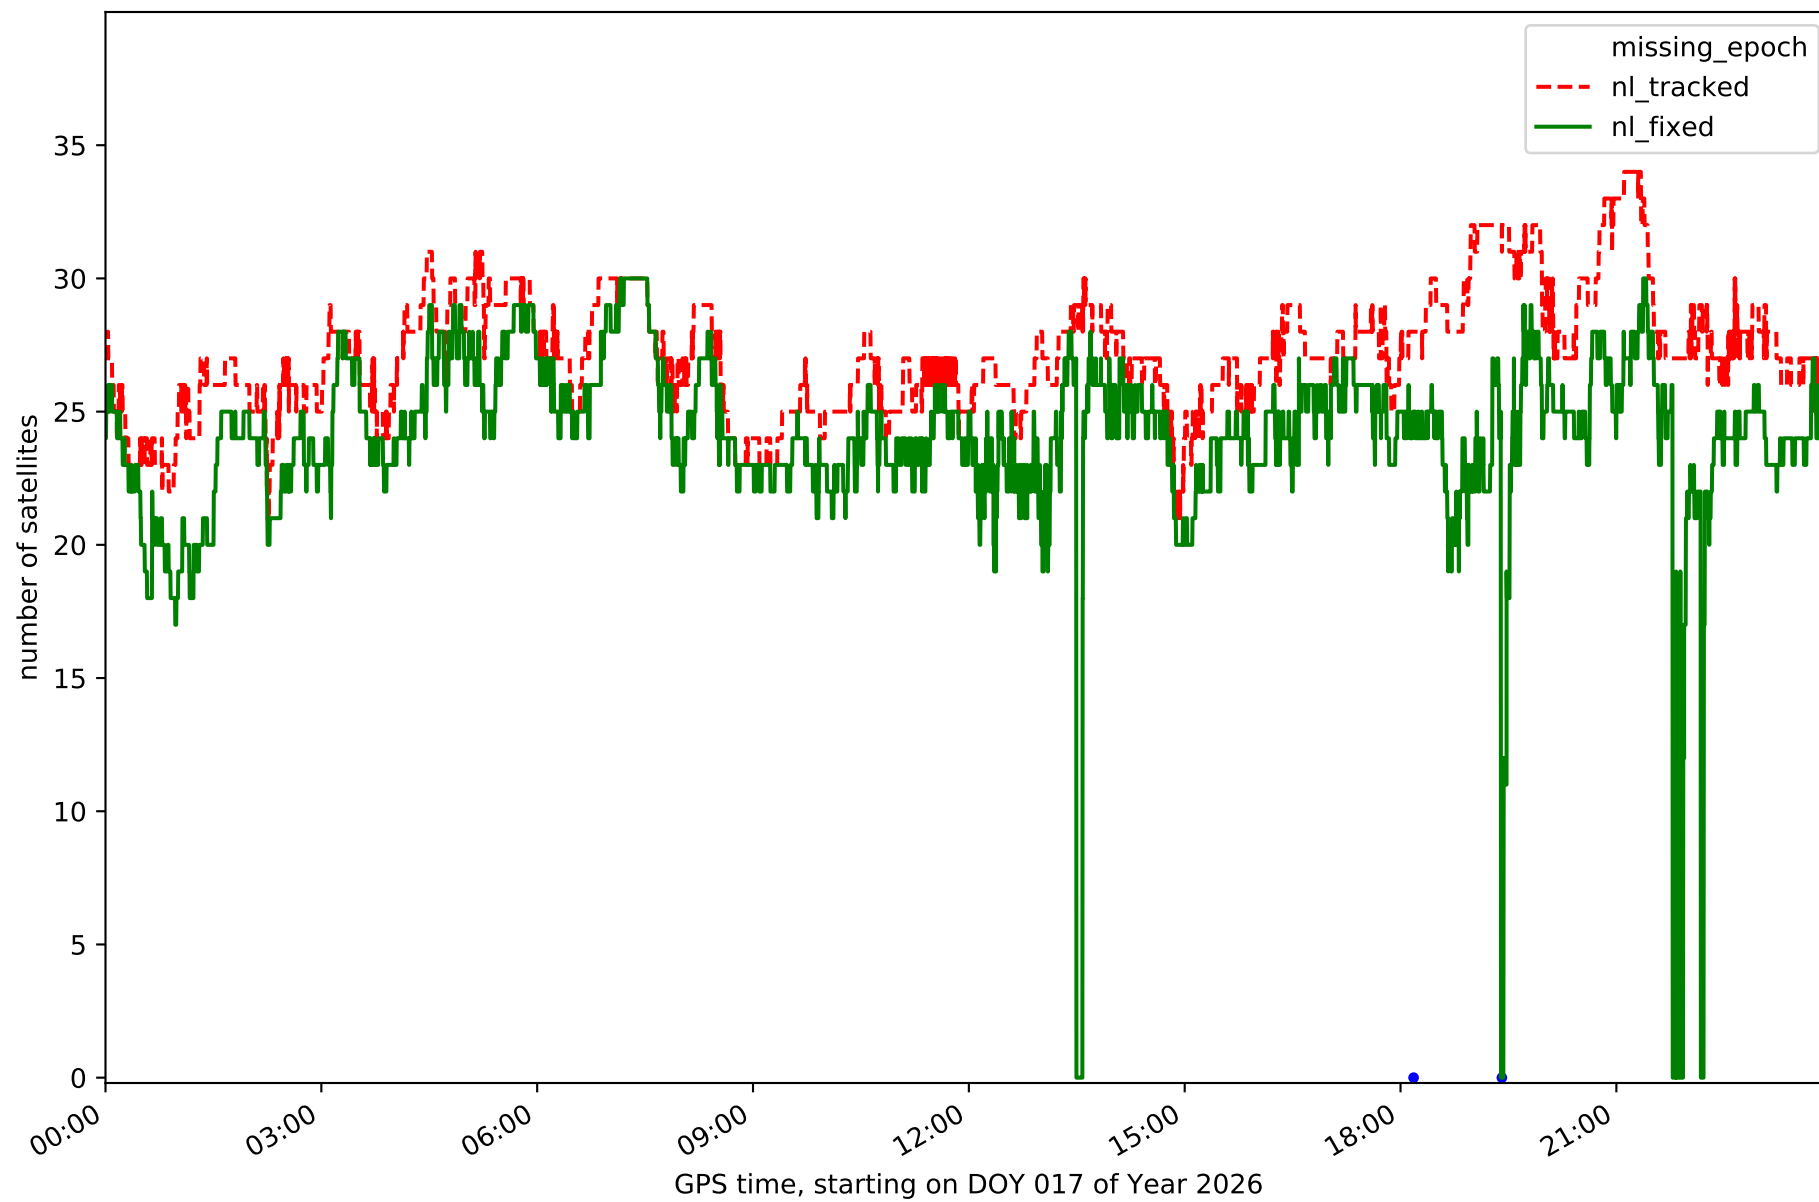


Station LRES in network N32T

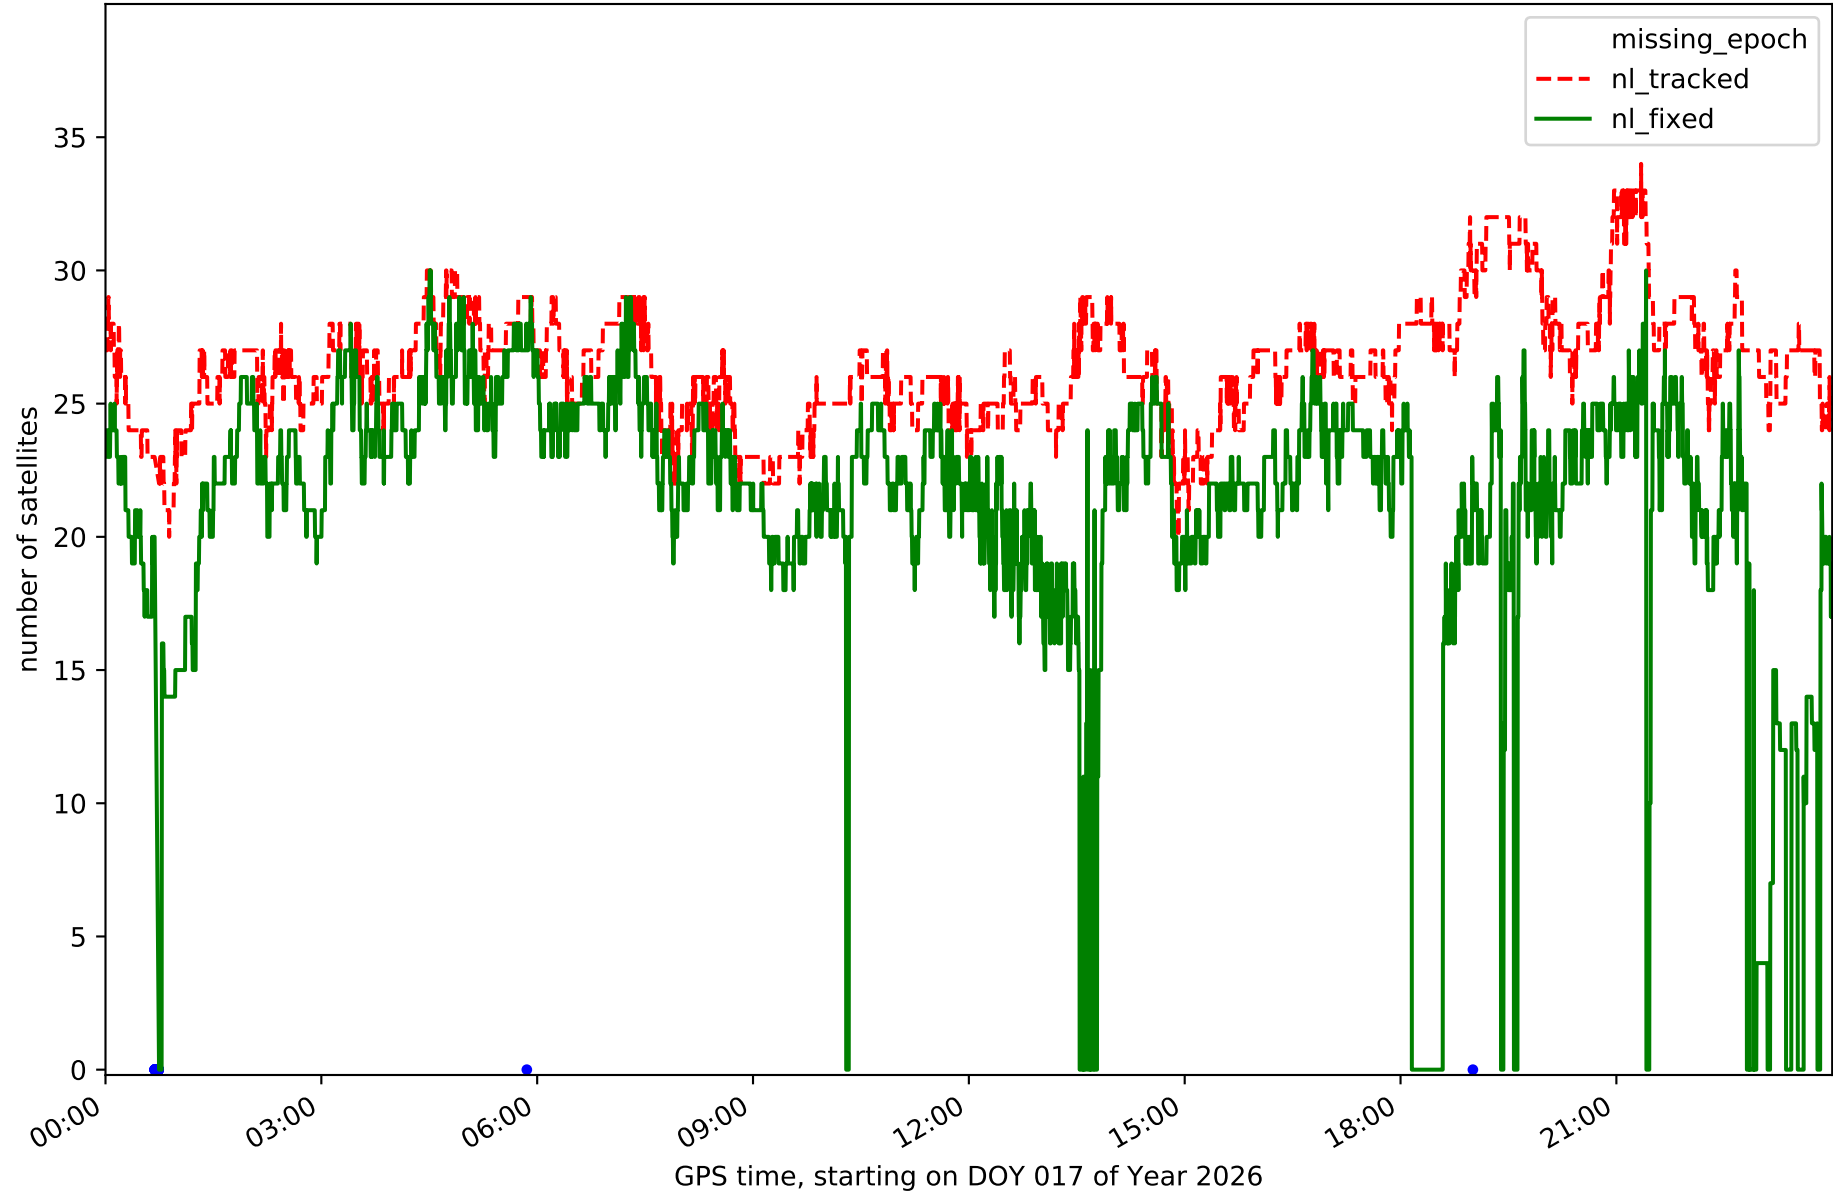


Station TN01 in network N32T

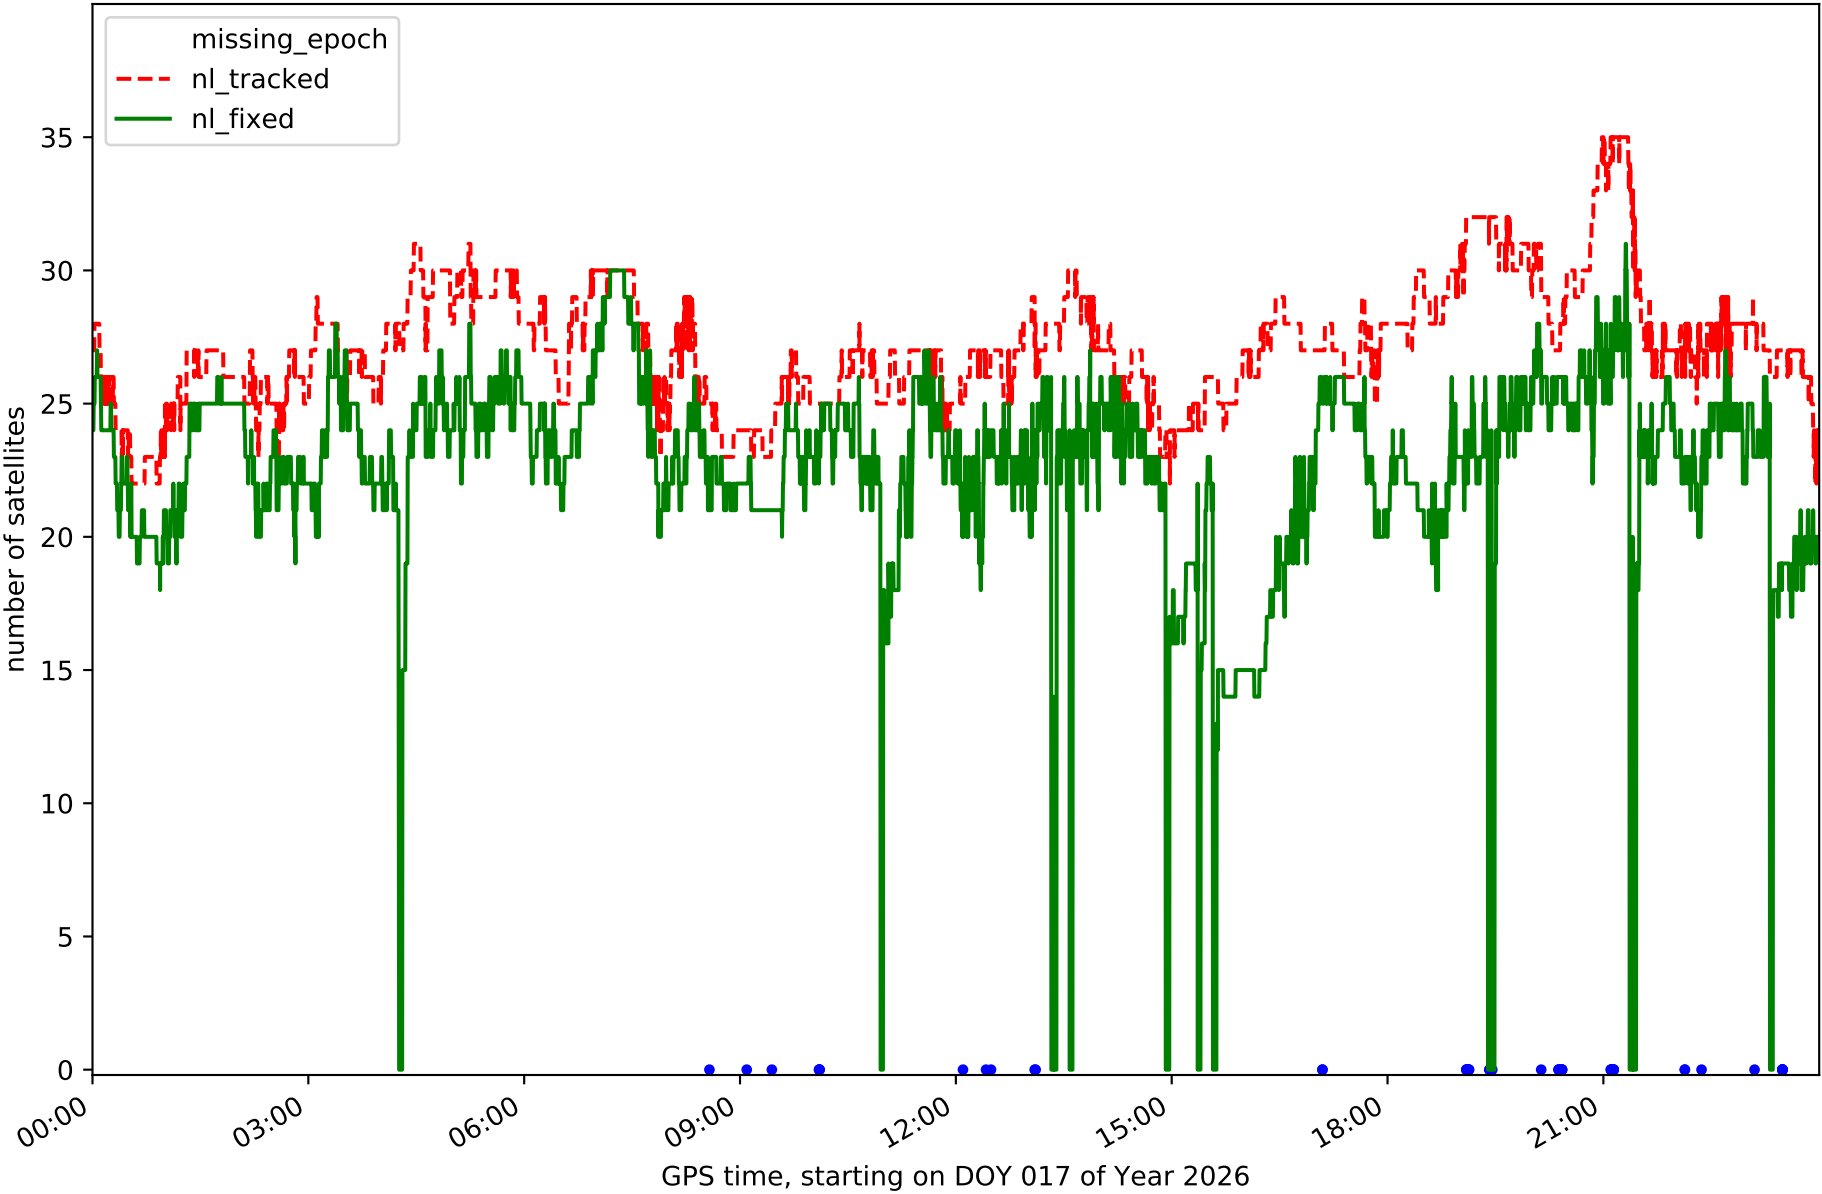


Station TN02 in network N32T

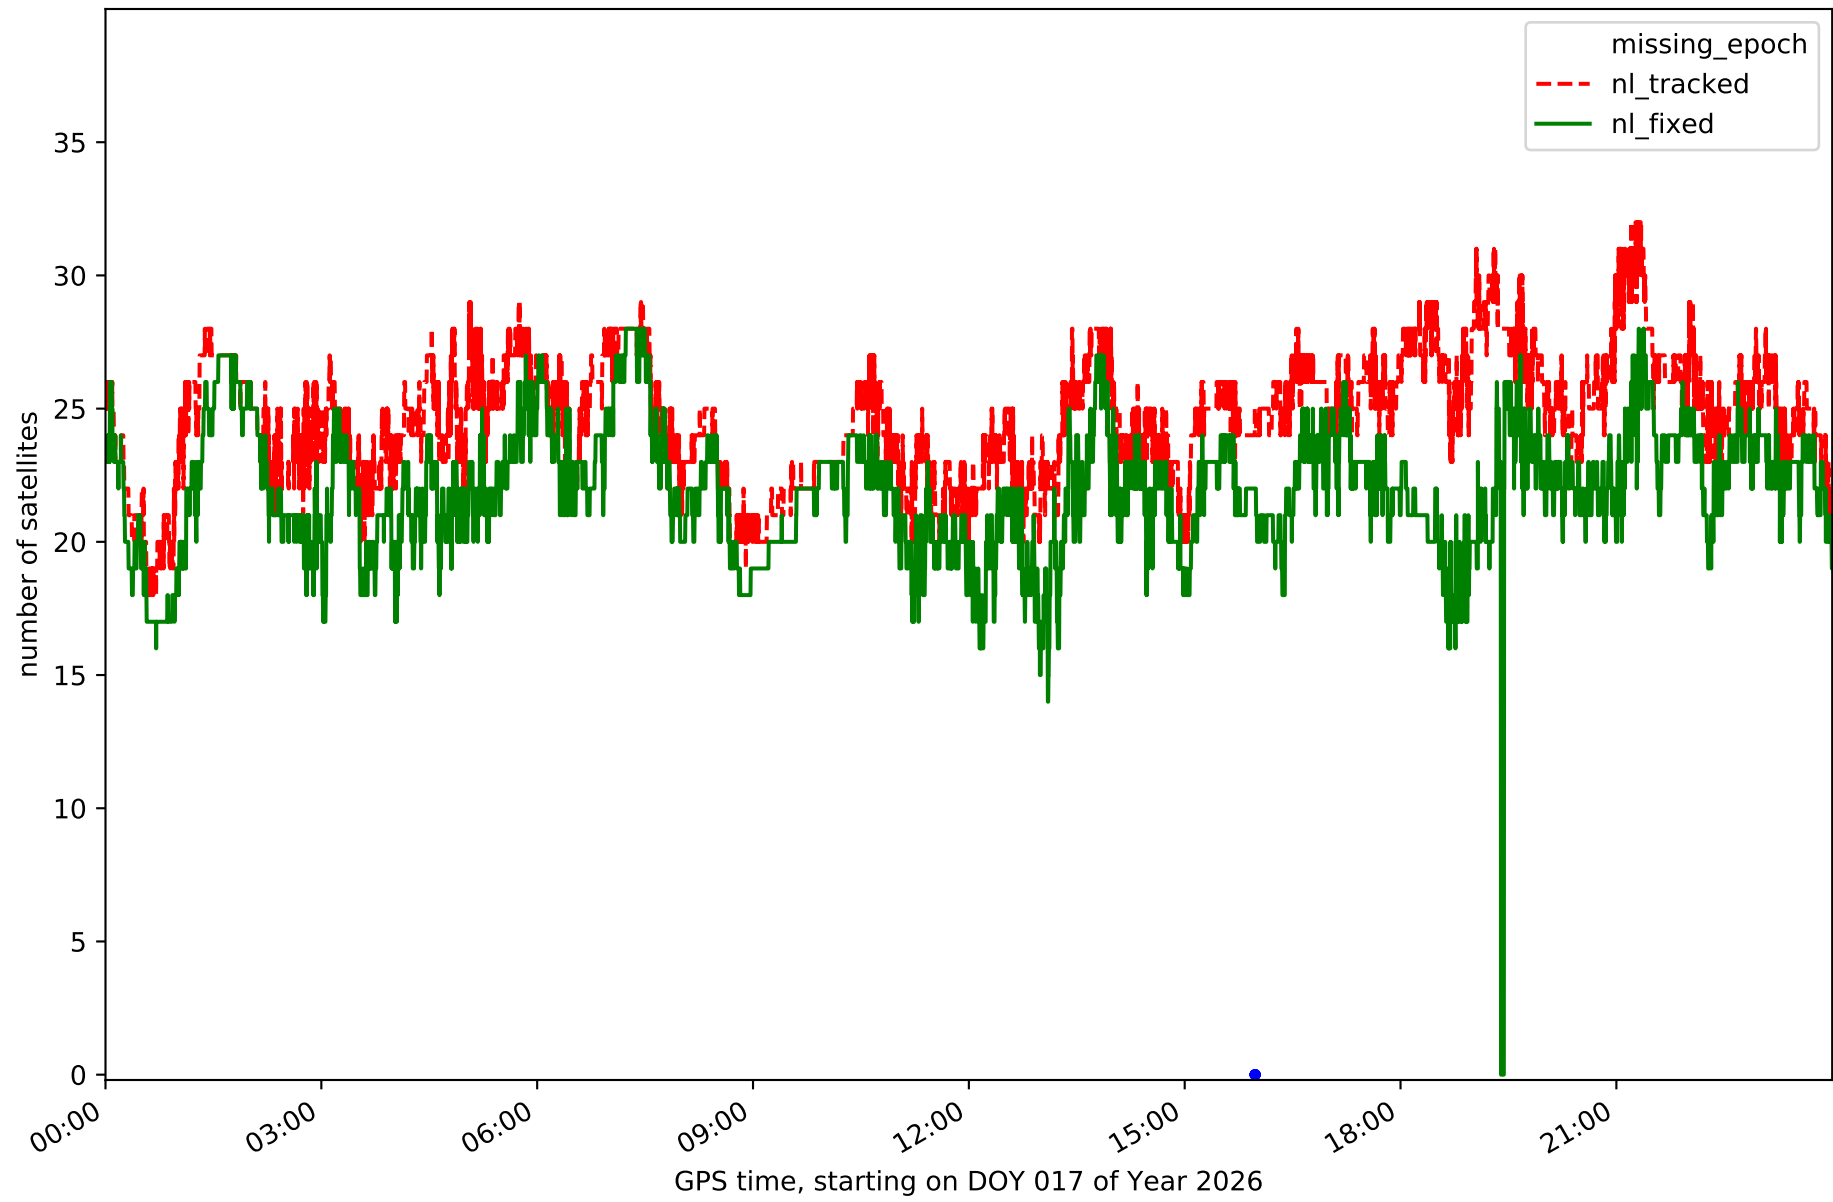


Station TN03 in network N32T

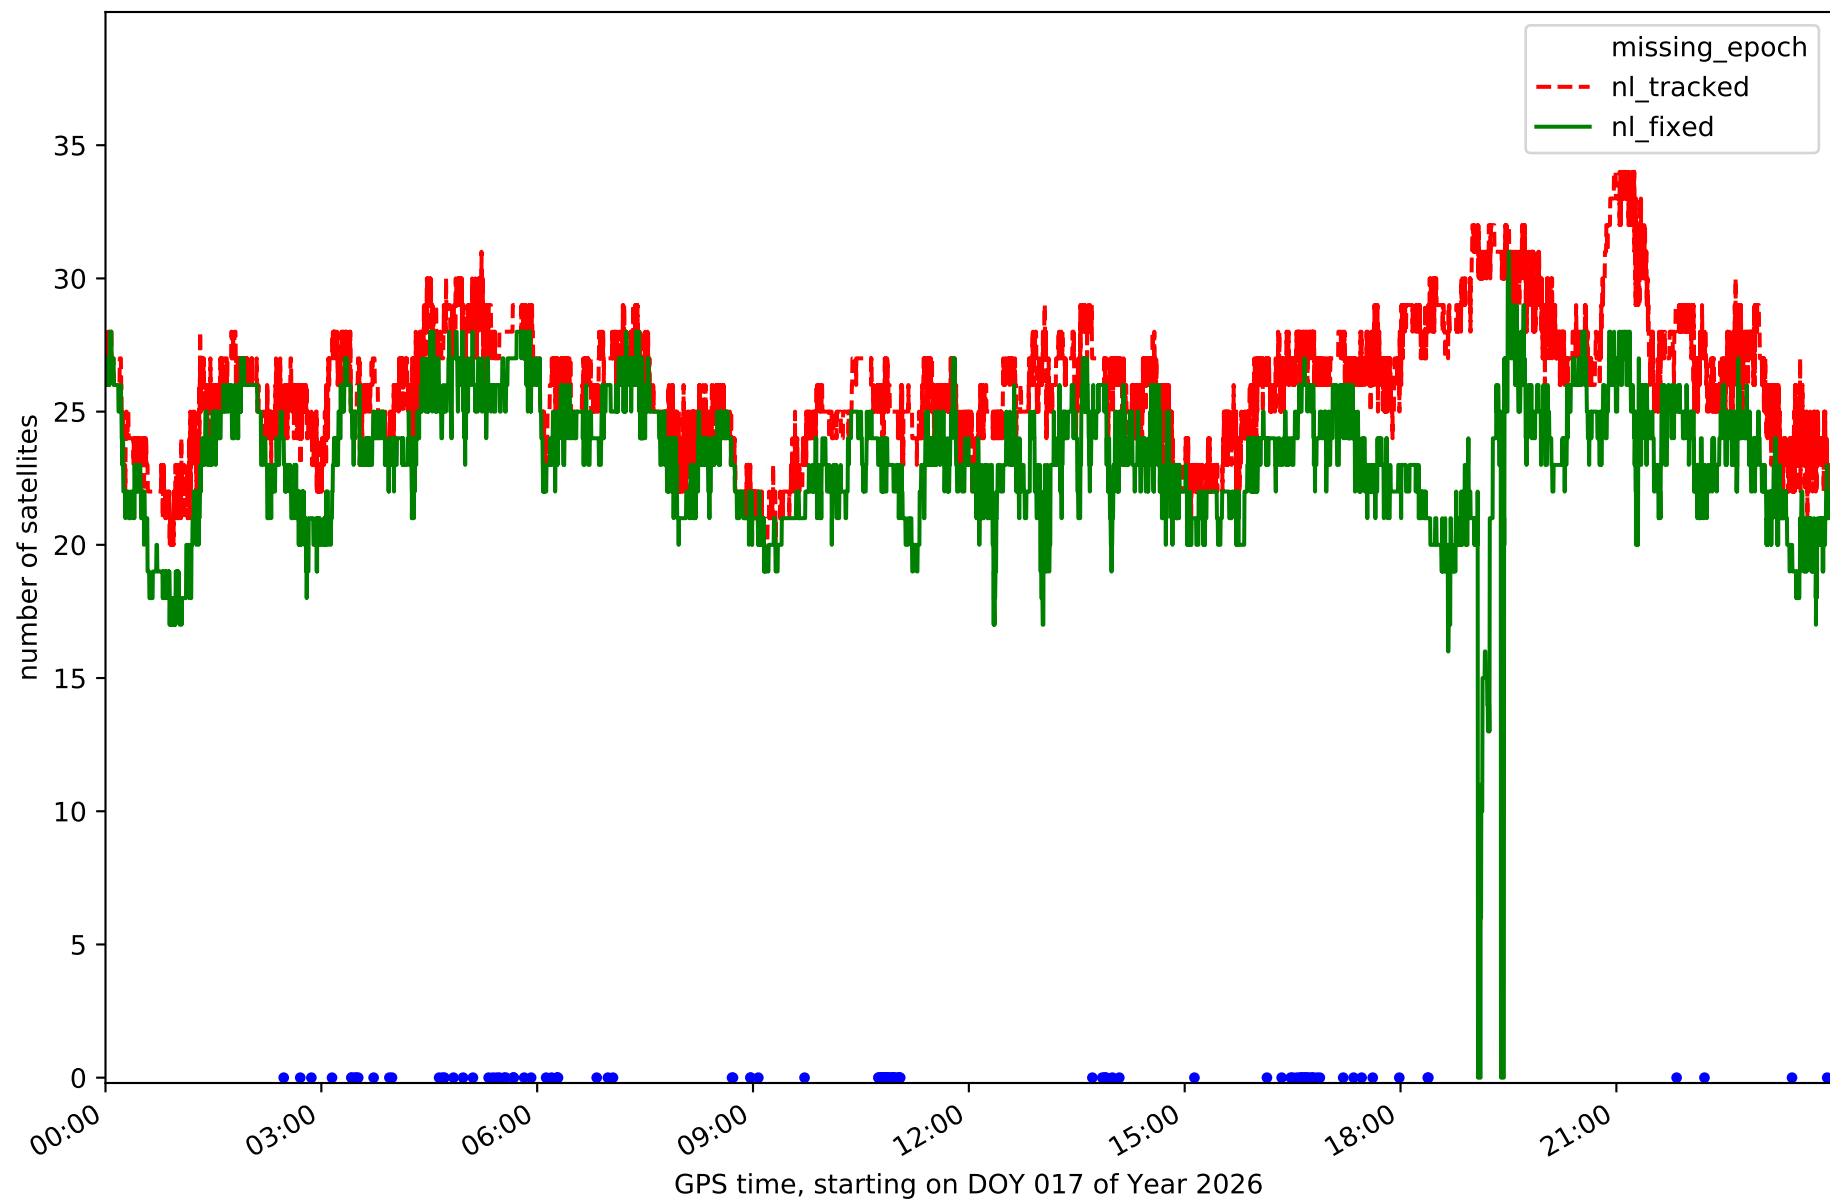


Station TN06 in network N32T

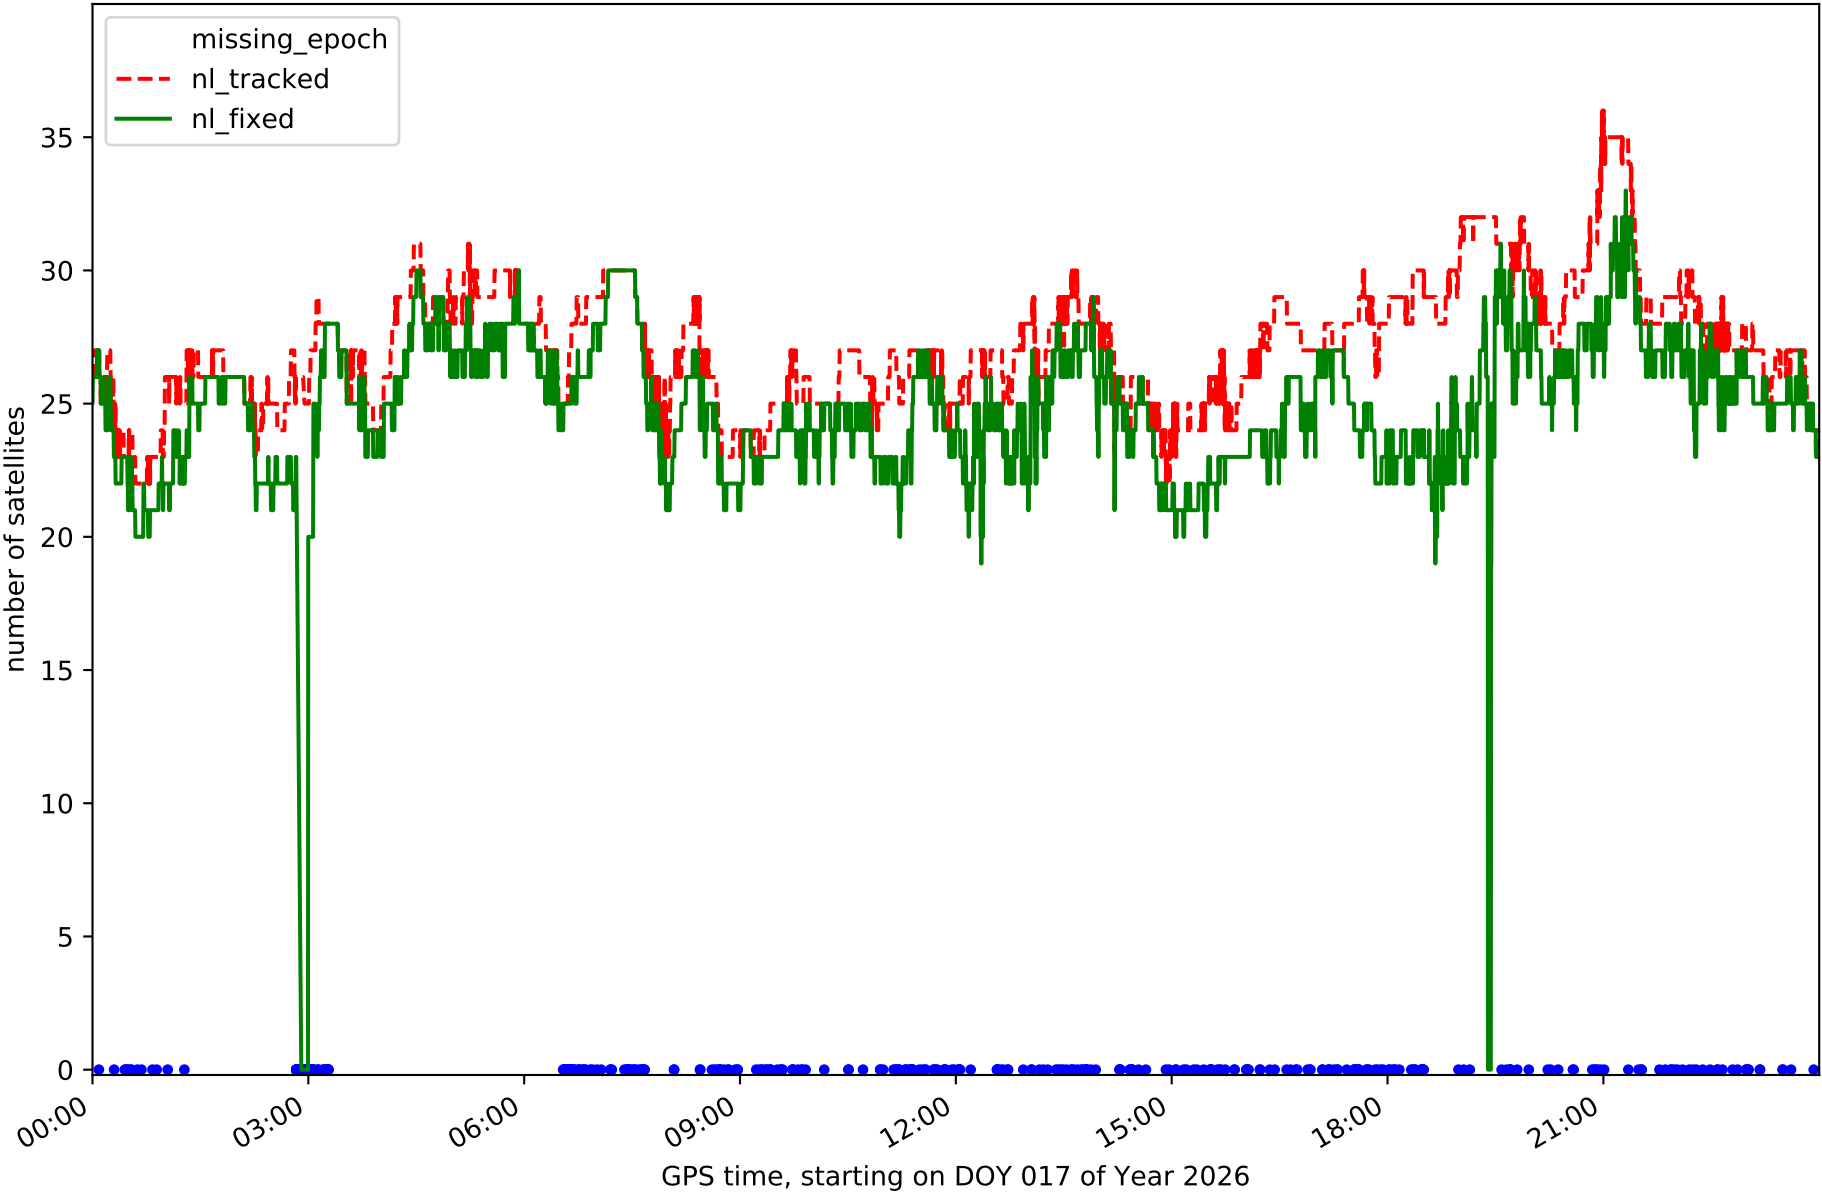


Station TN09 in network N32T

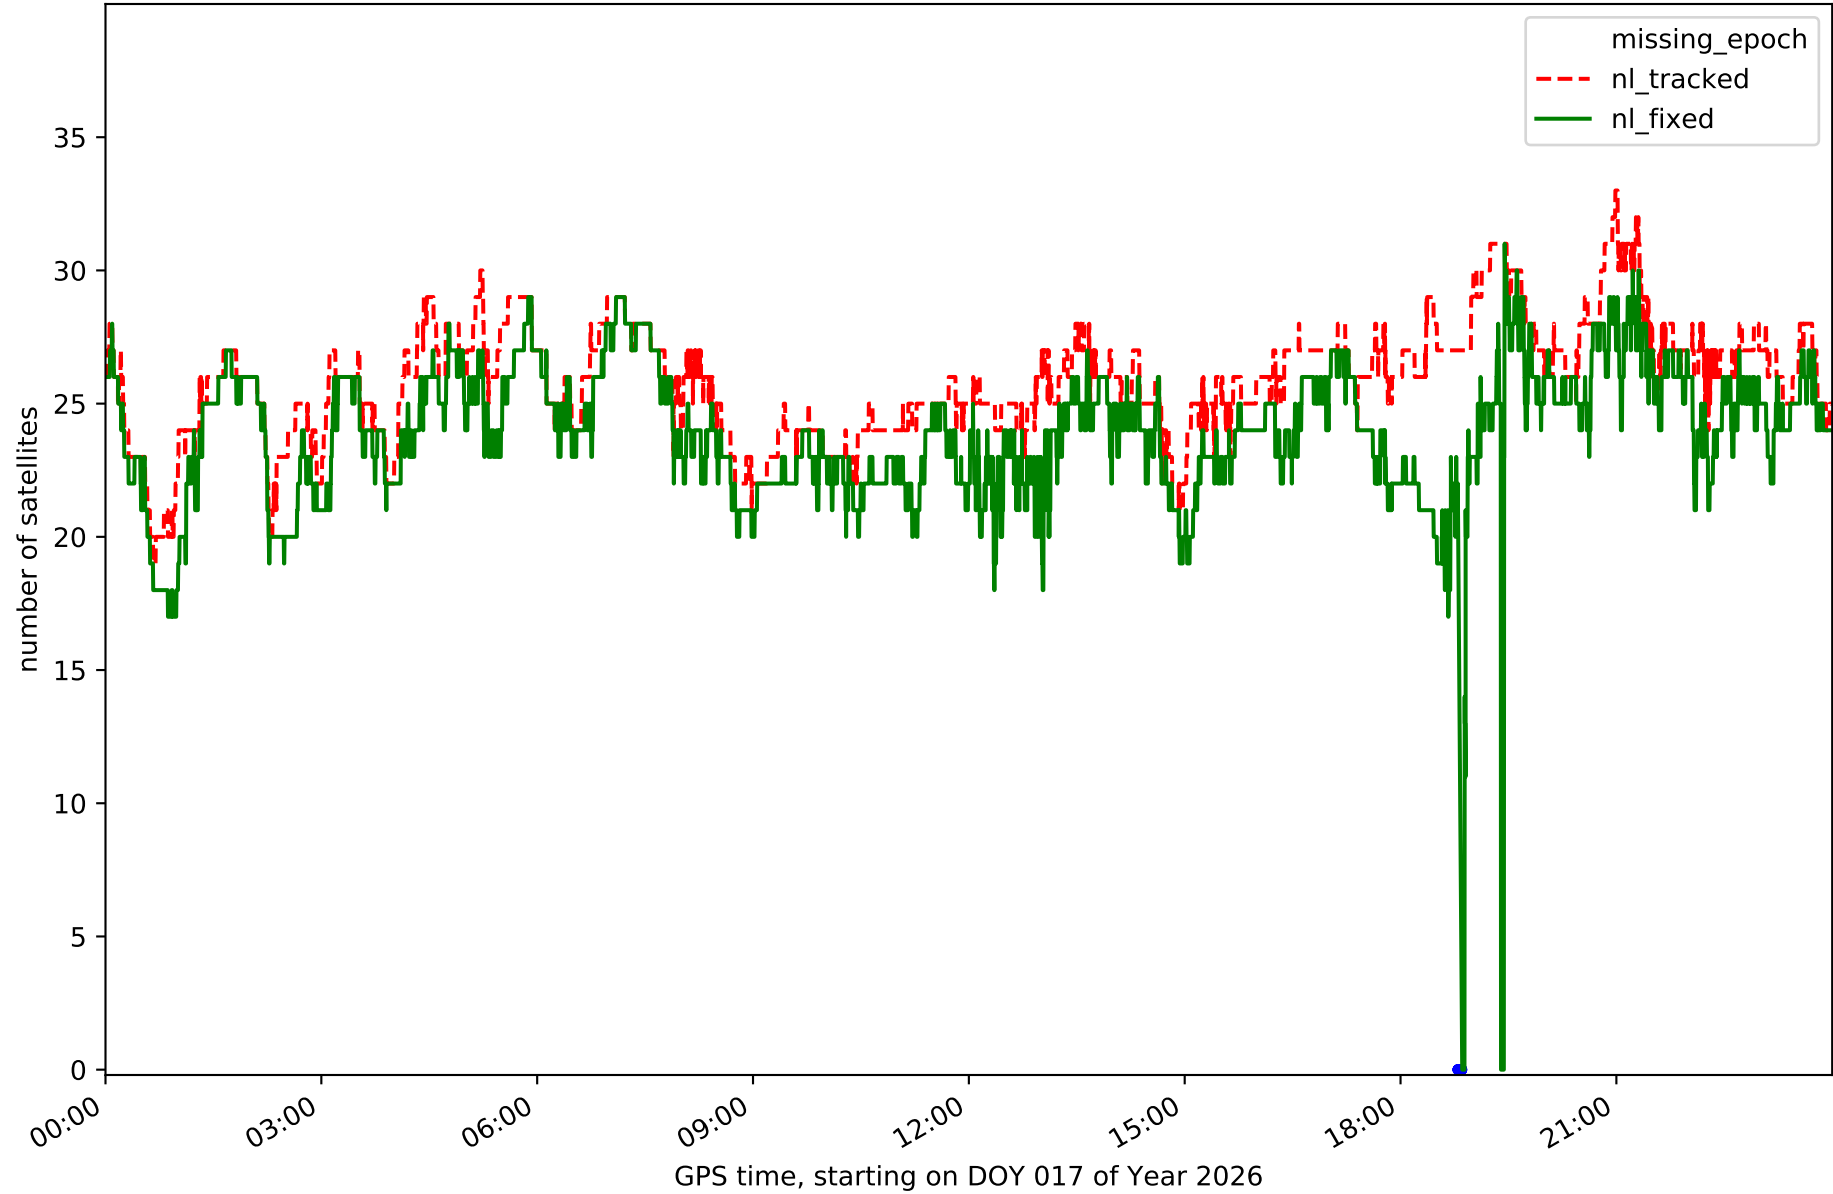


Station TE11 in network N32T

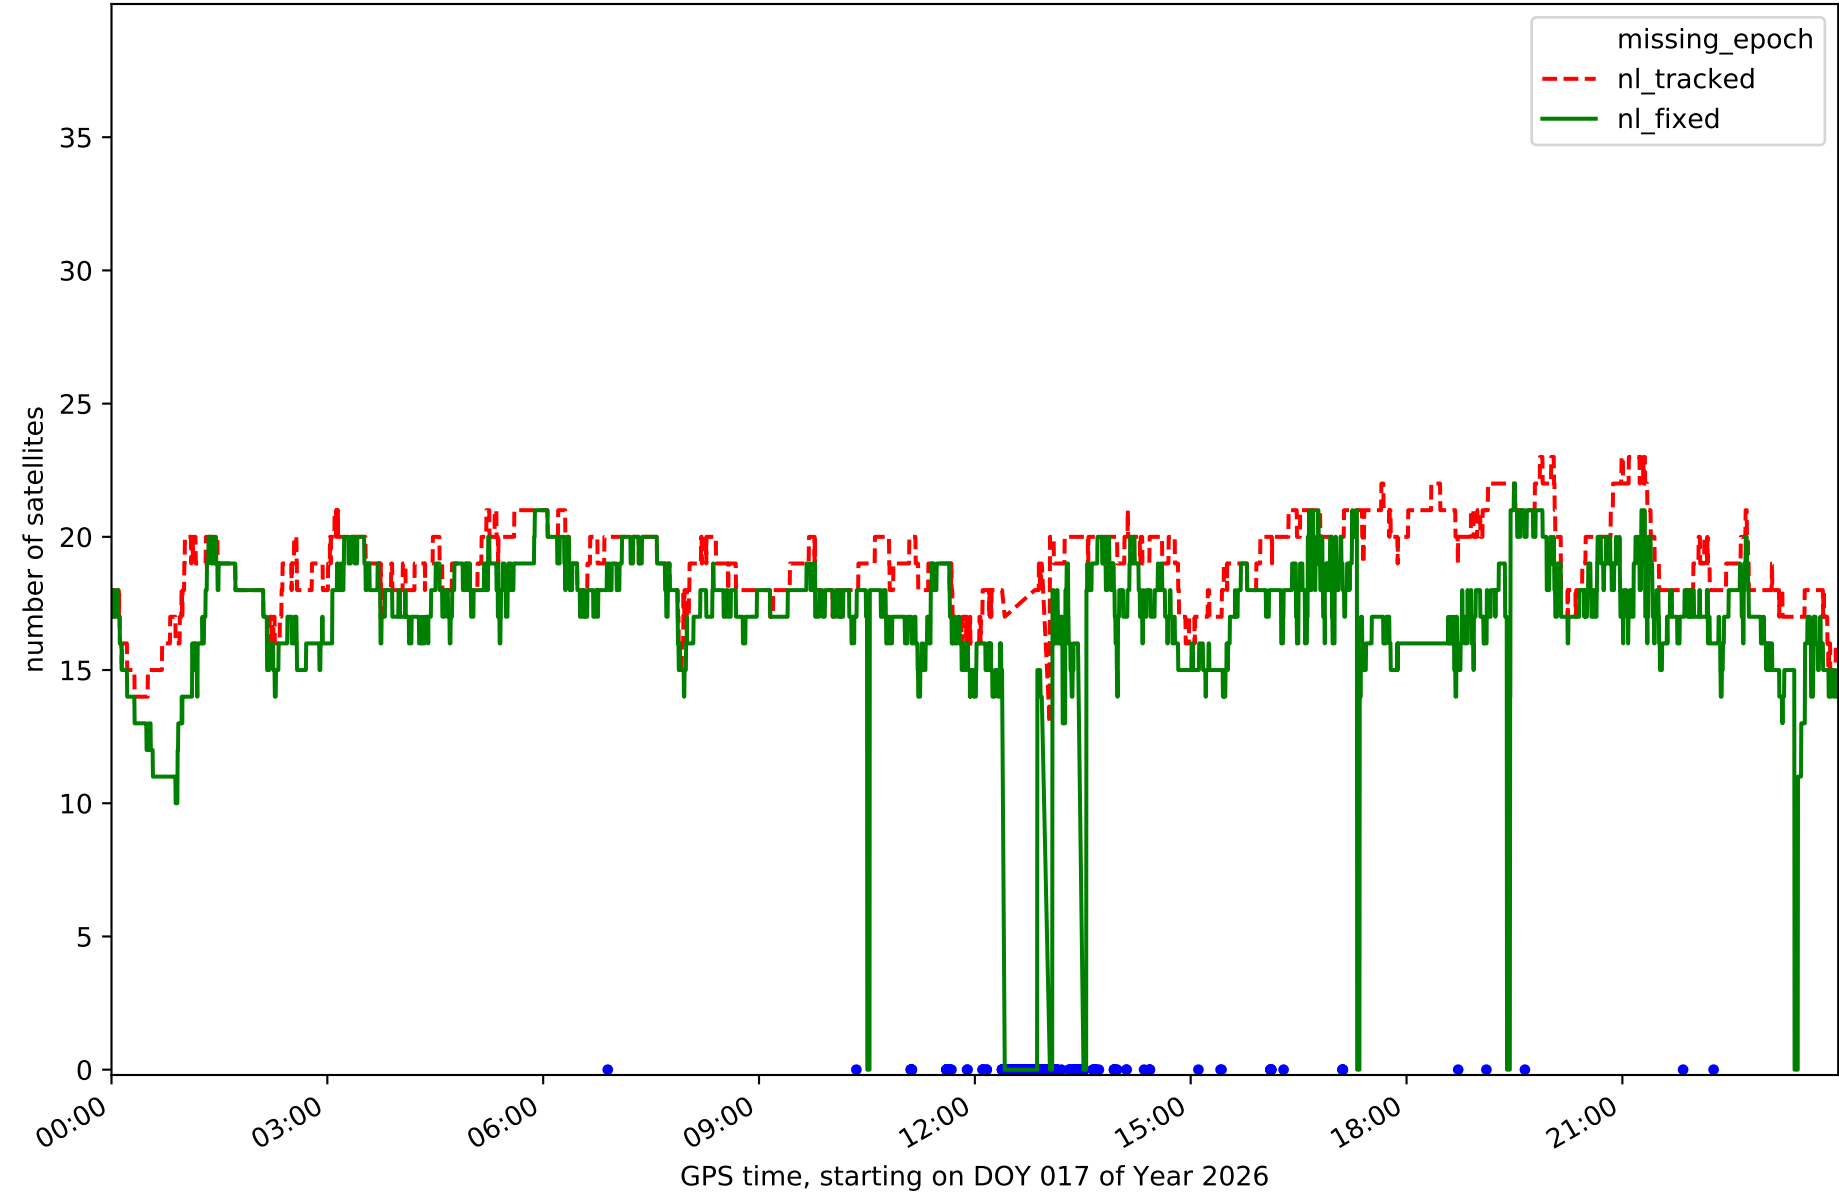


RefCheck for station EH01 in network N32T

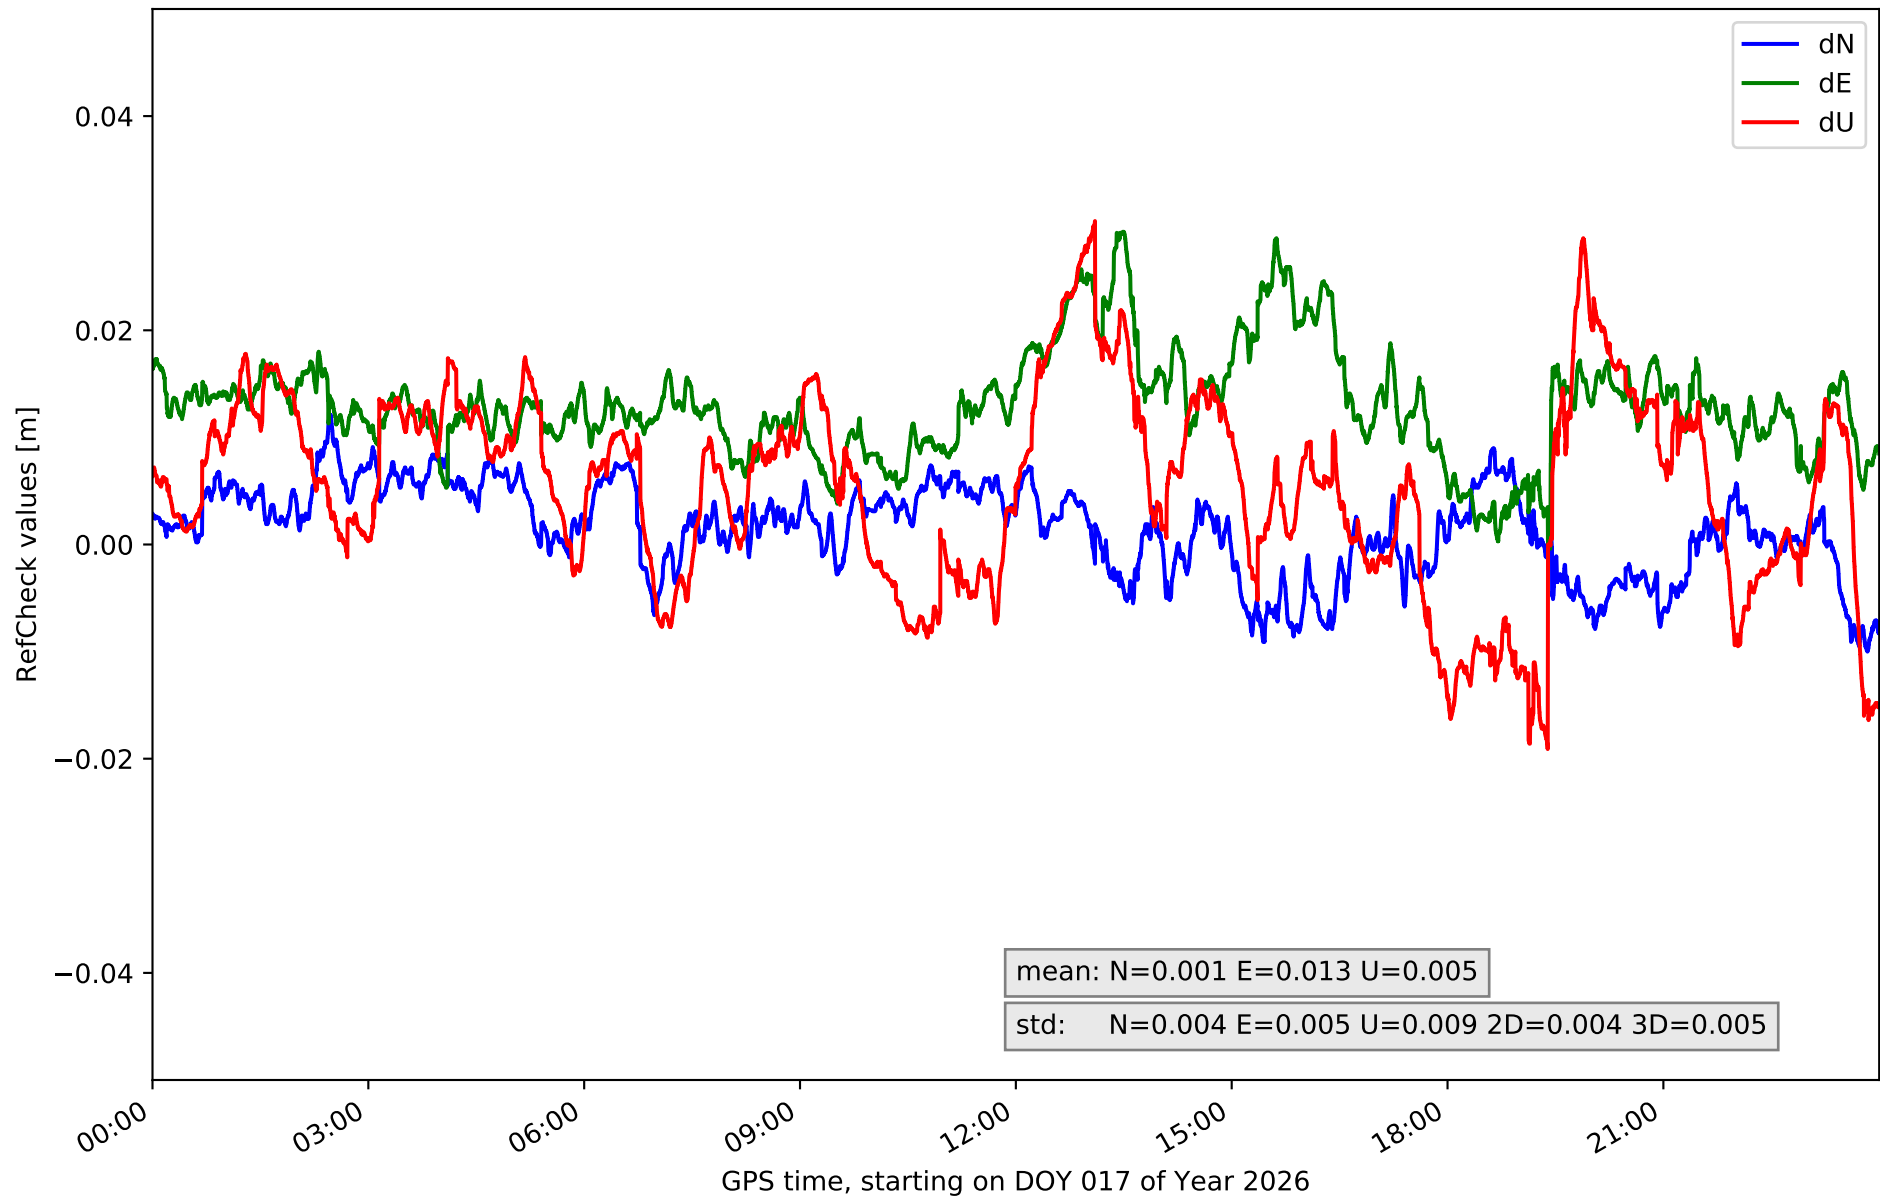


RefCheck for station EH02 in network N32T

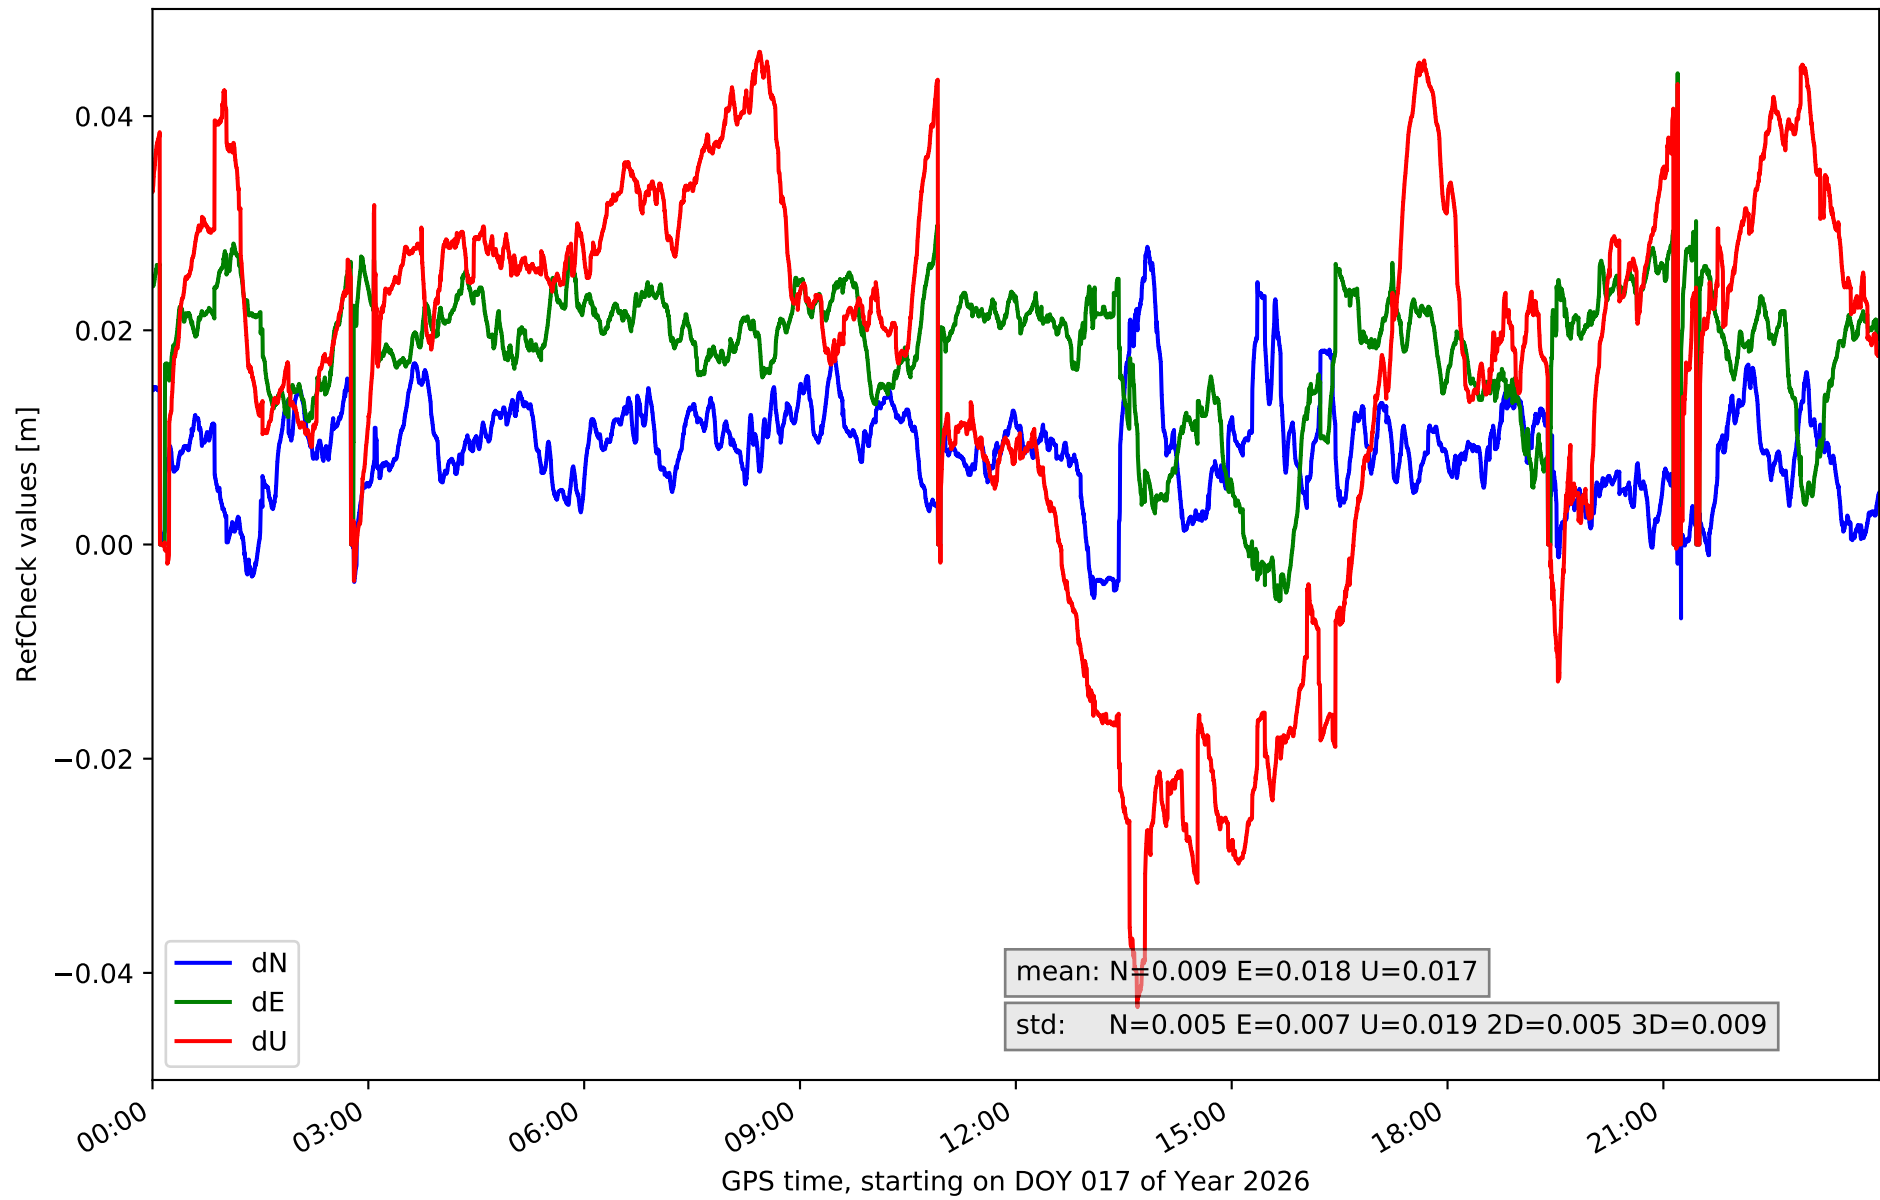


RefCheck for station GOM1 in network N32T

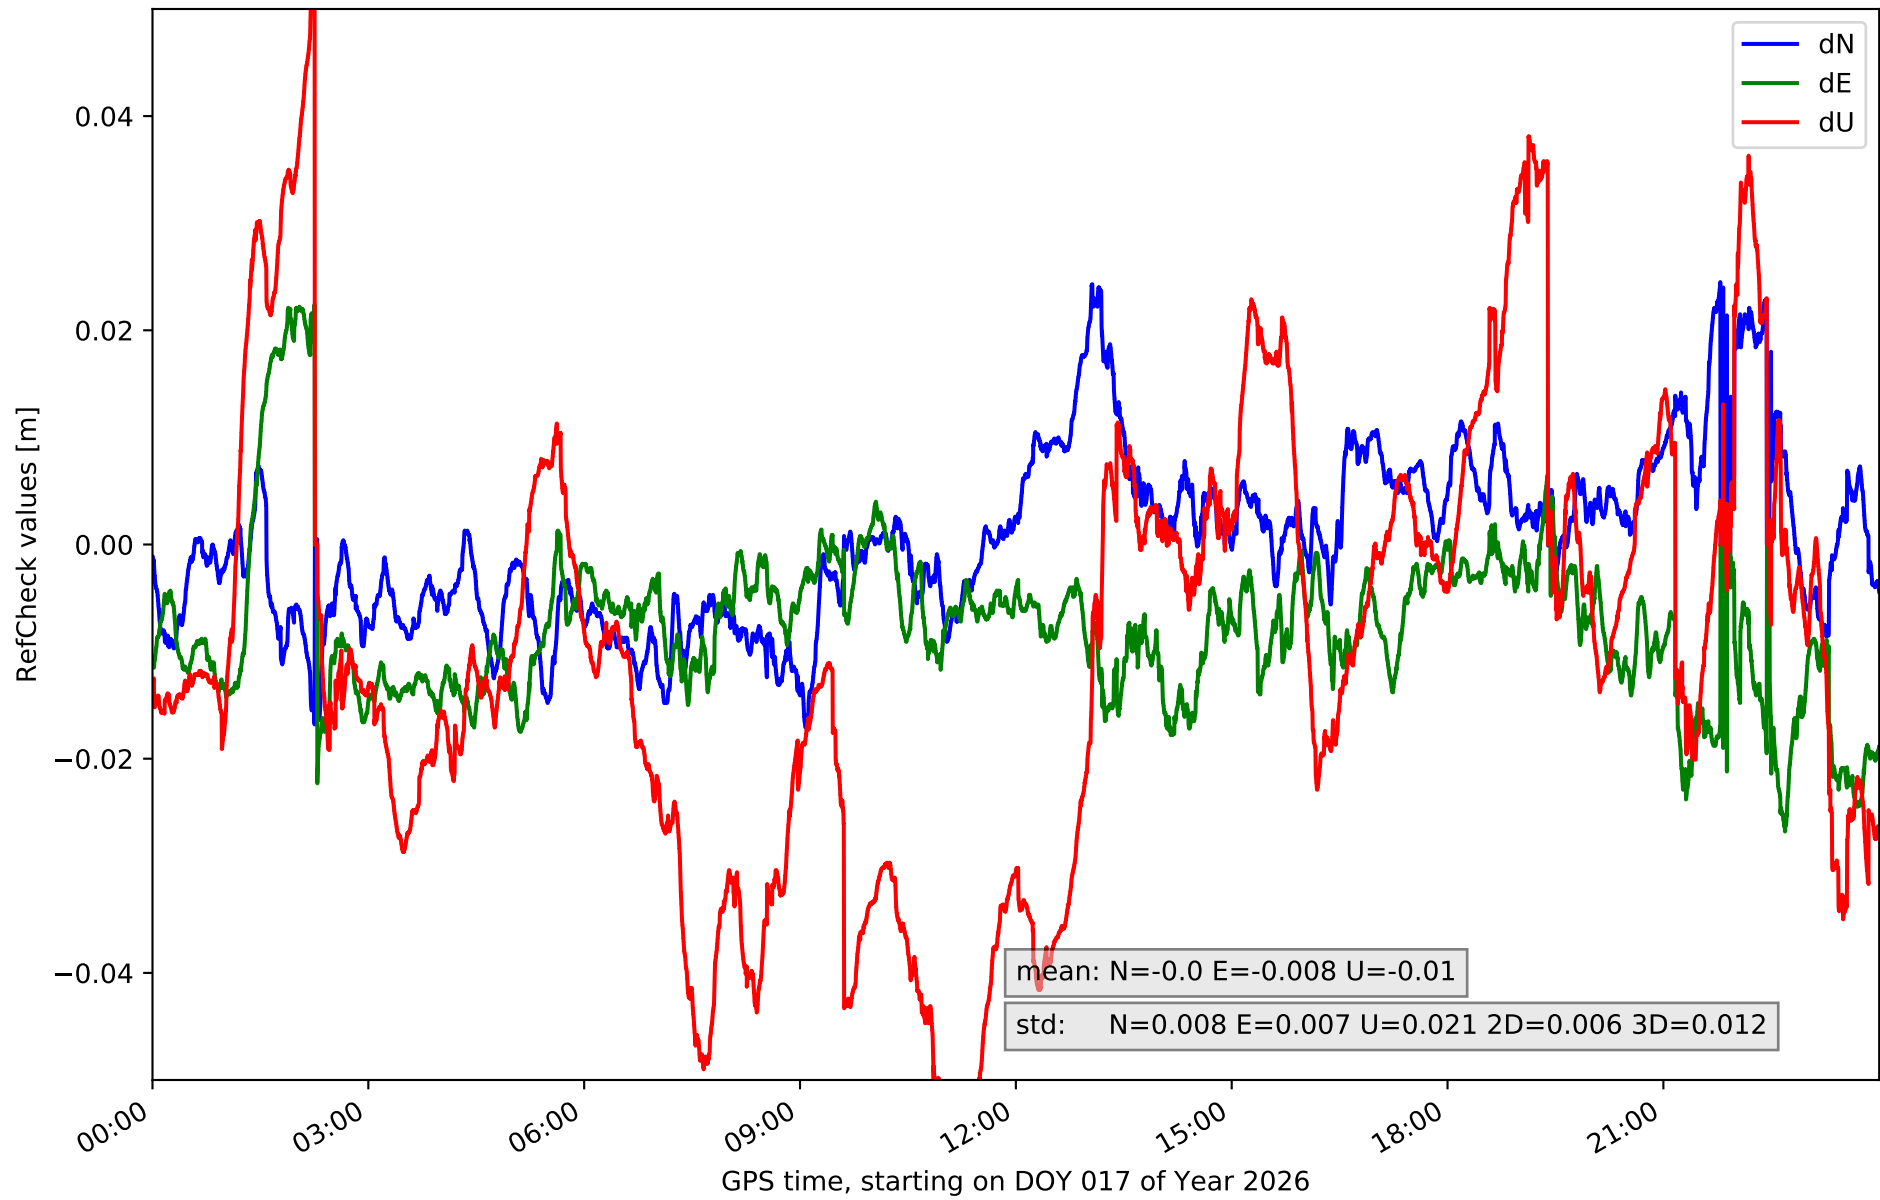


RefCheck for station GOME in network N32T

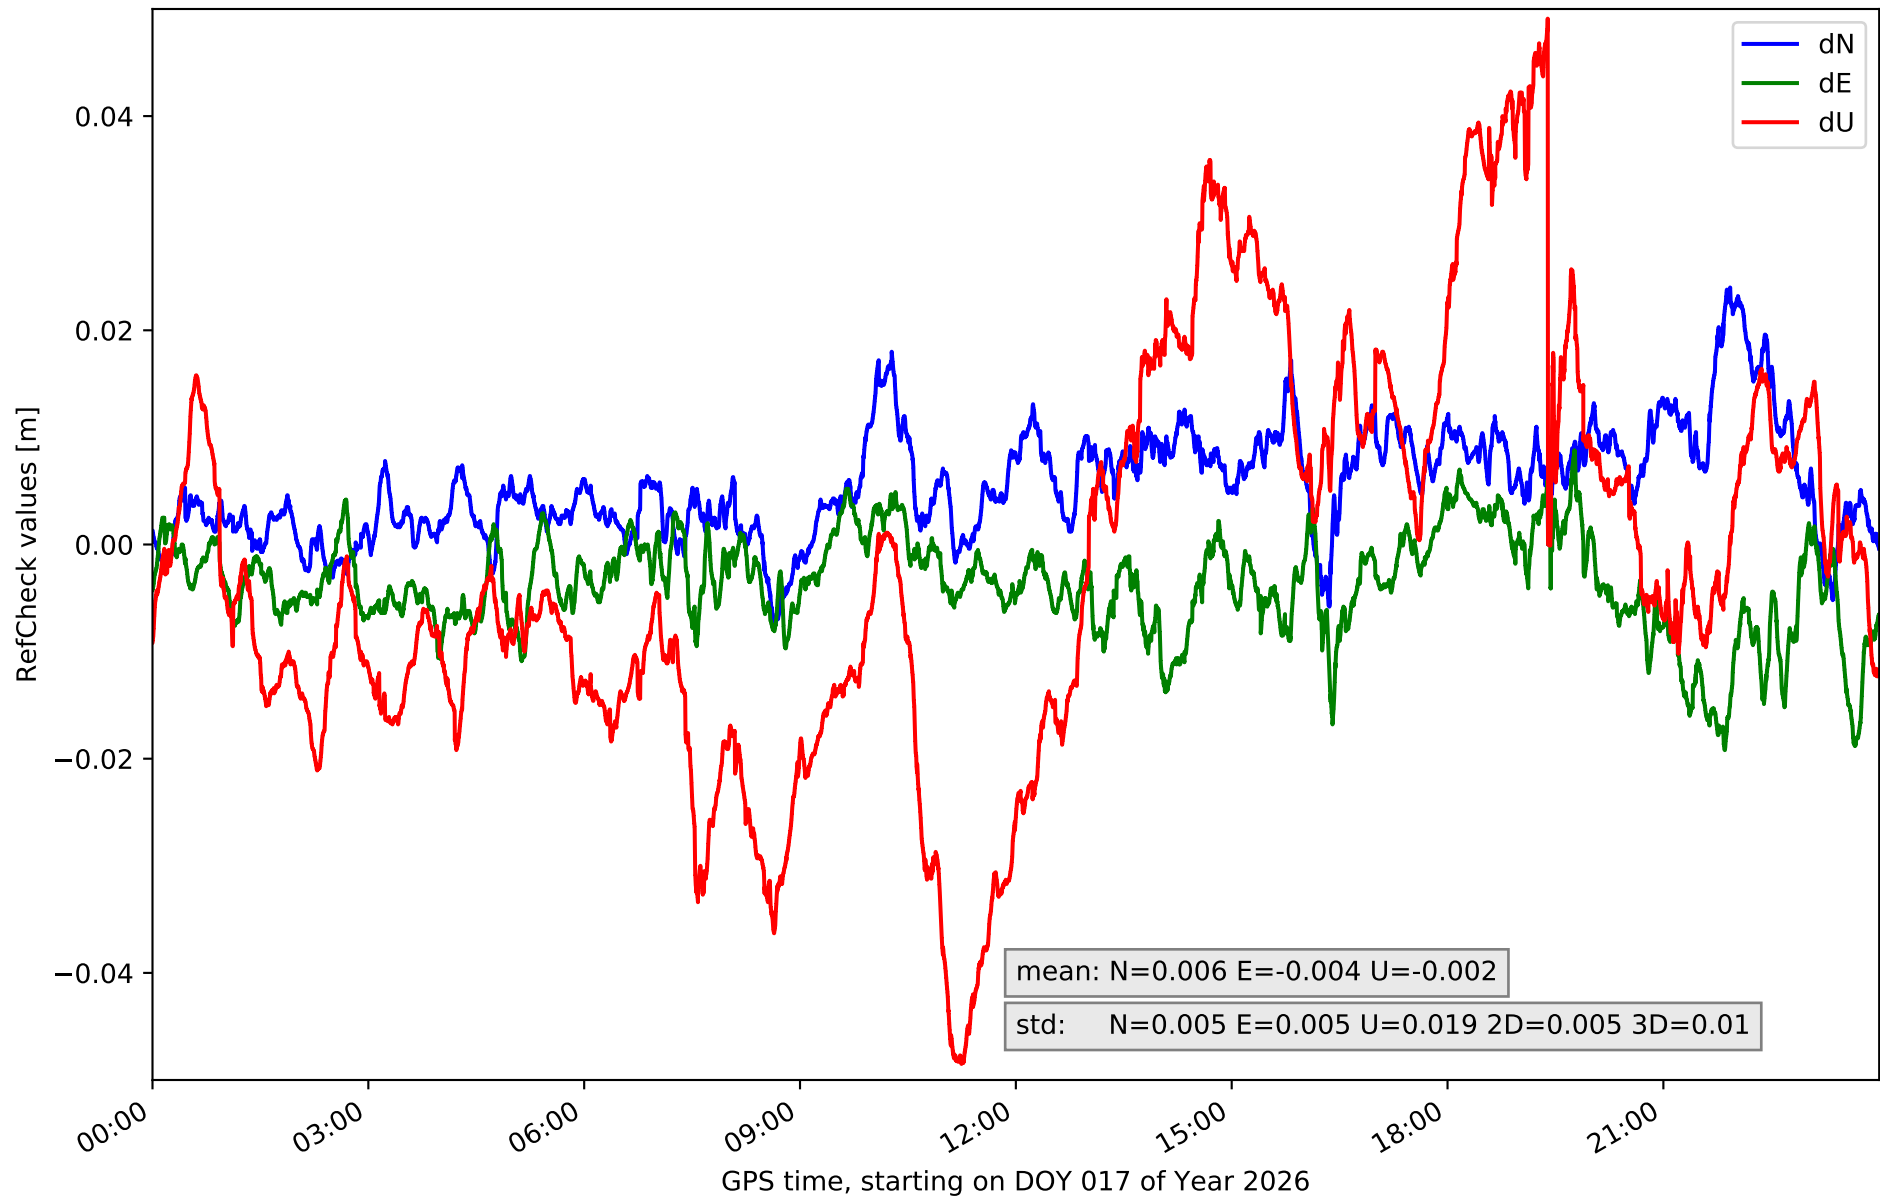


RefCheck for station IZAN in network N32T

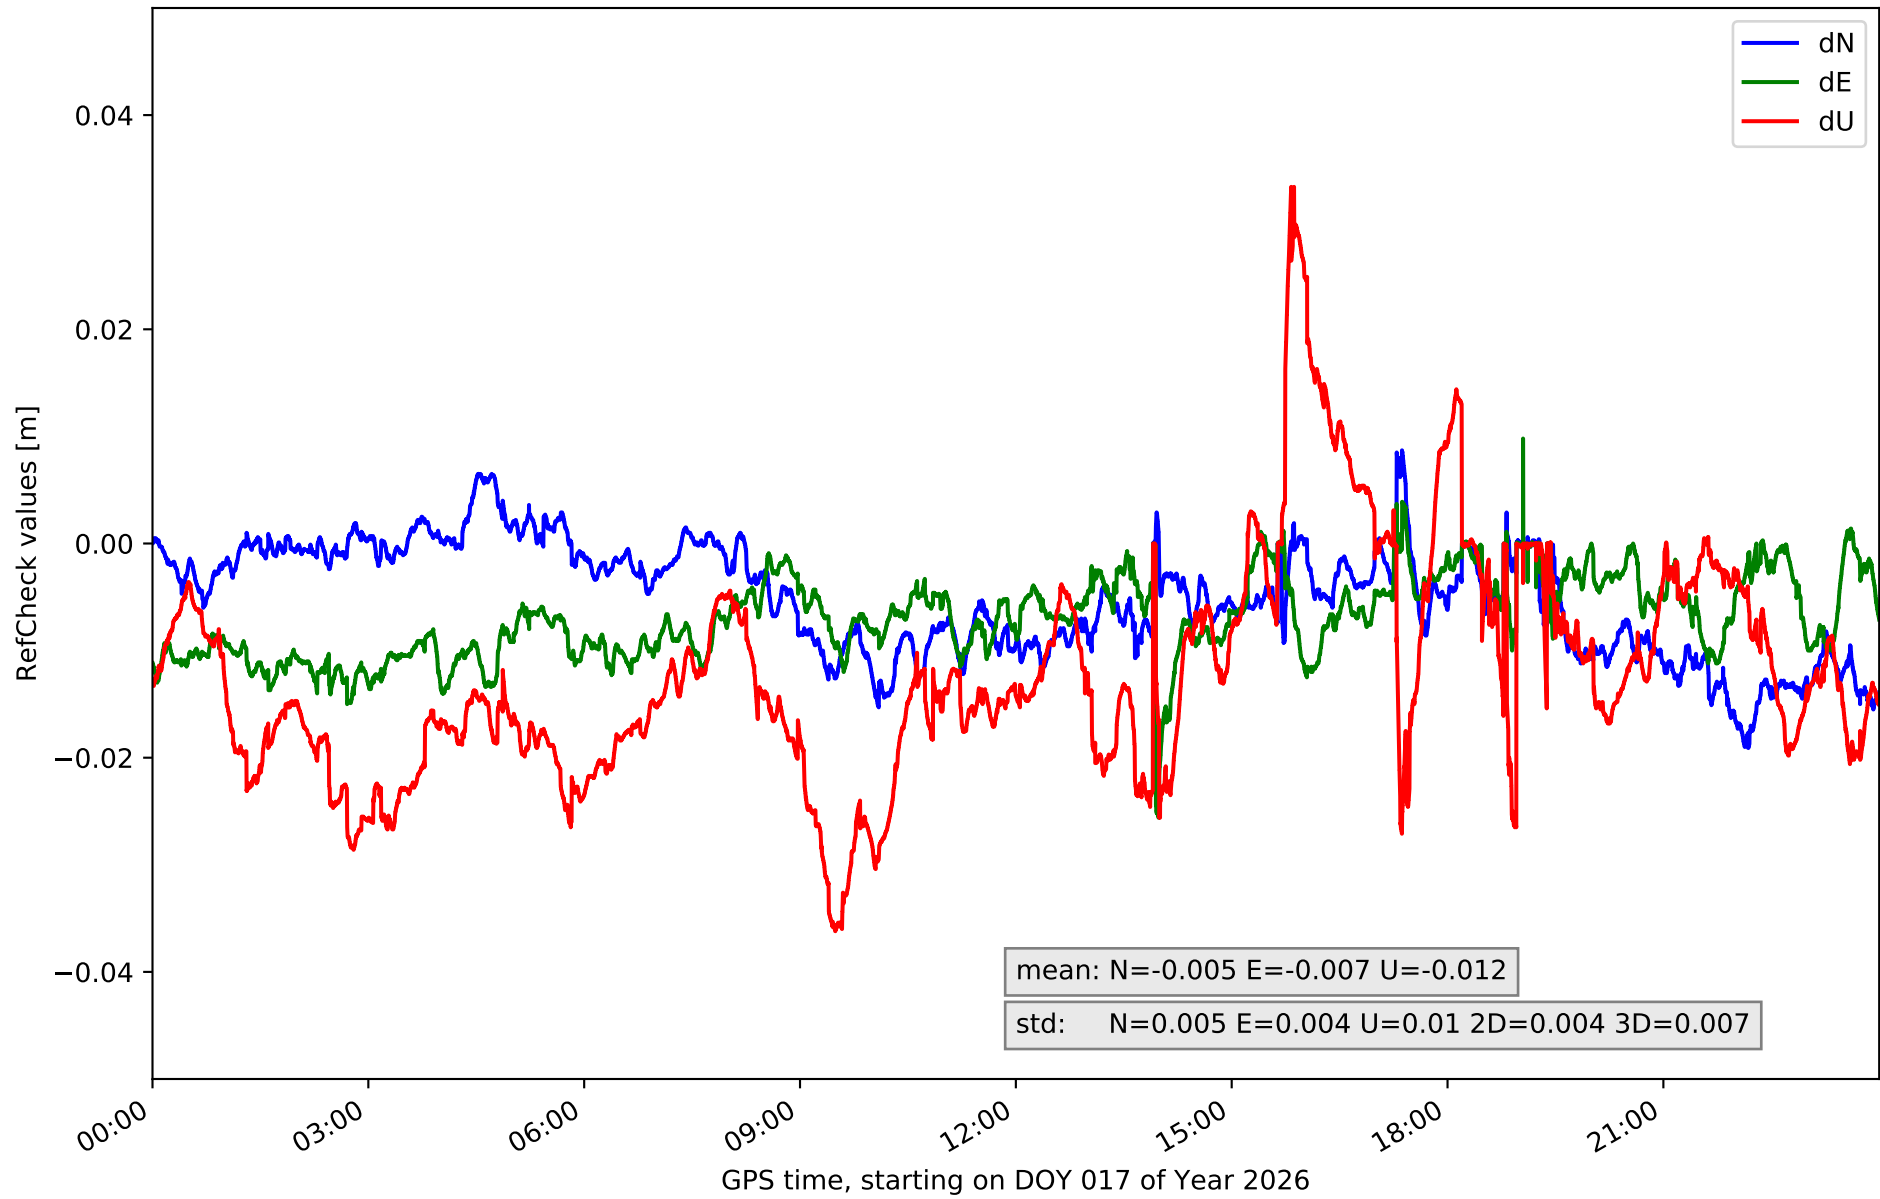


RefCheck for station LP01 in network N32T

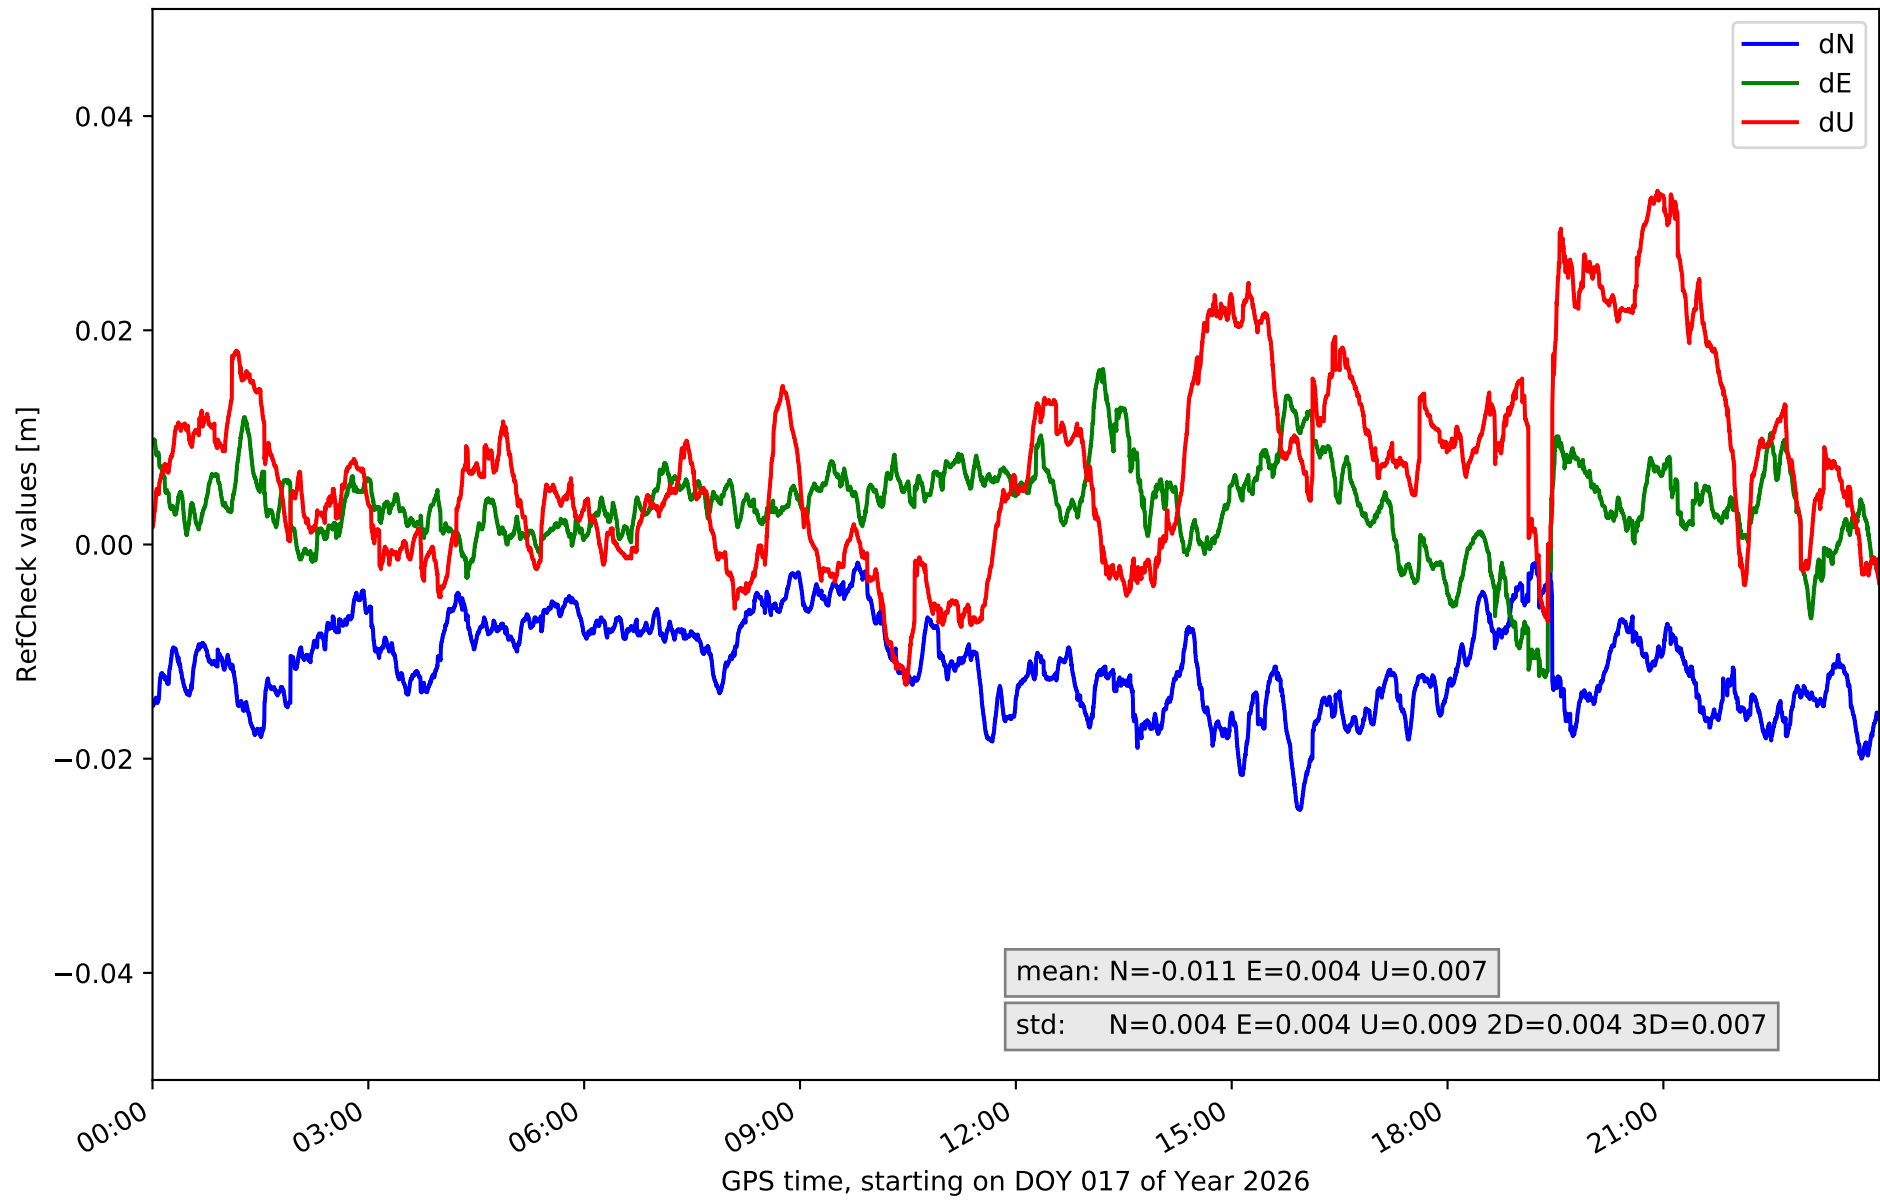


RefCheck for station LP03 in network N32T

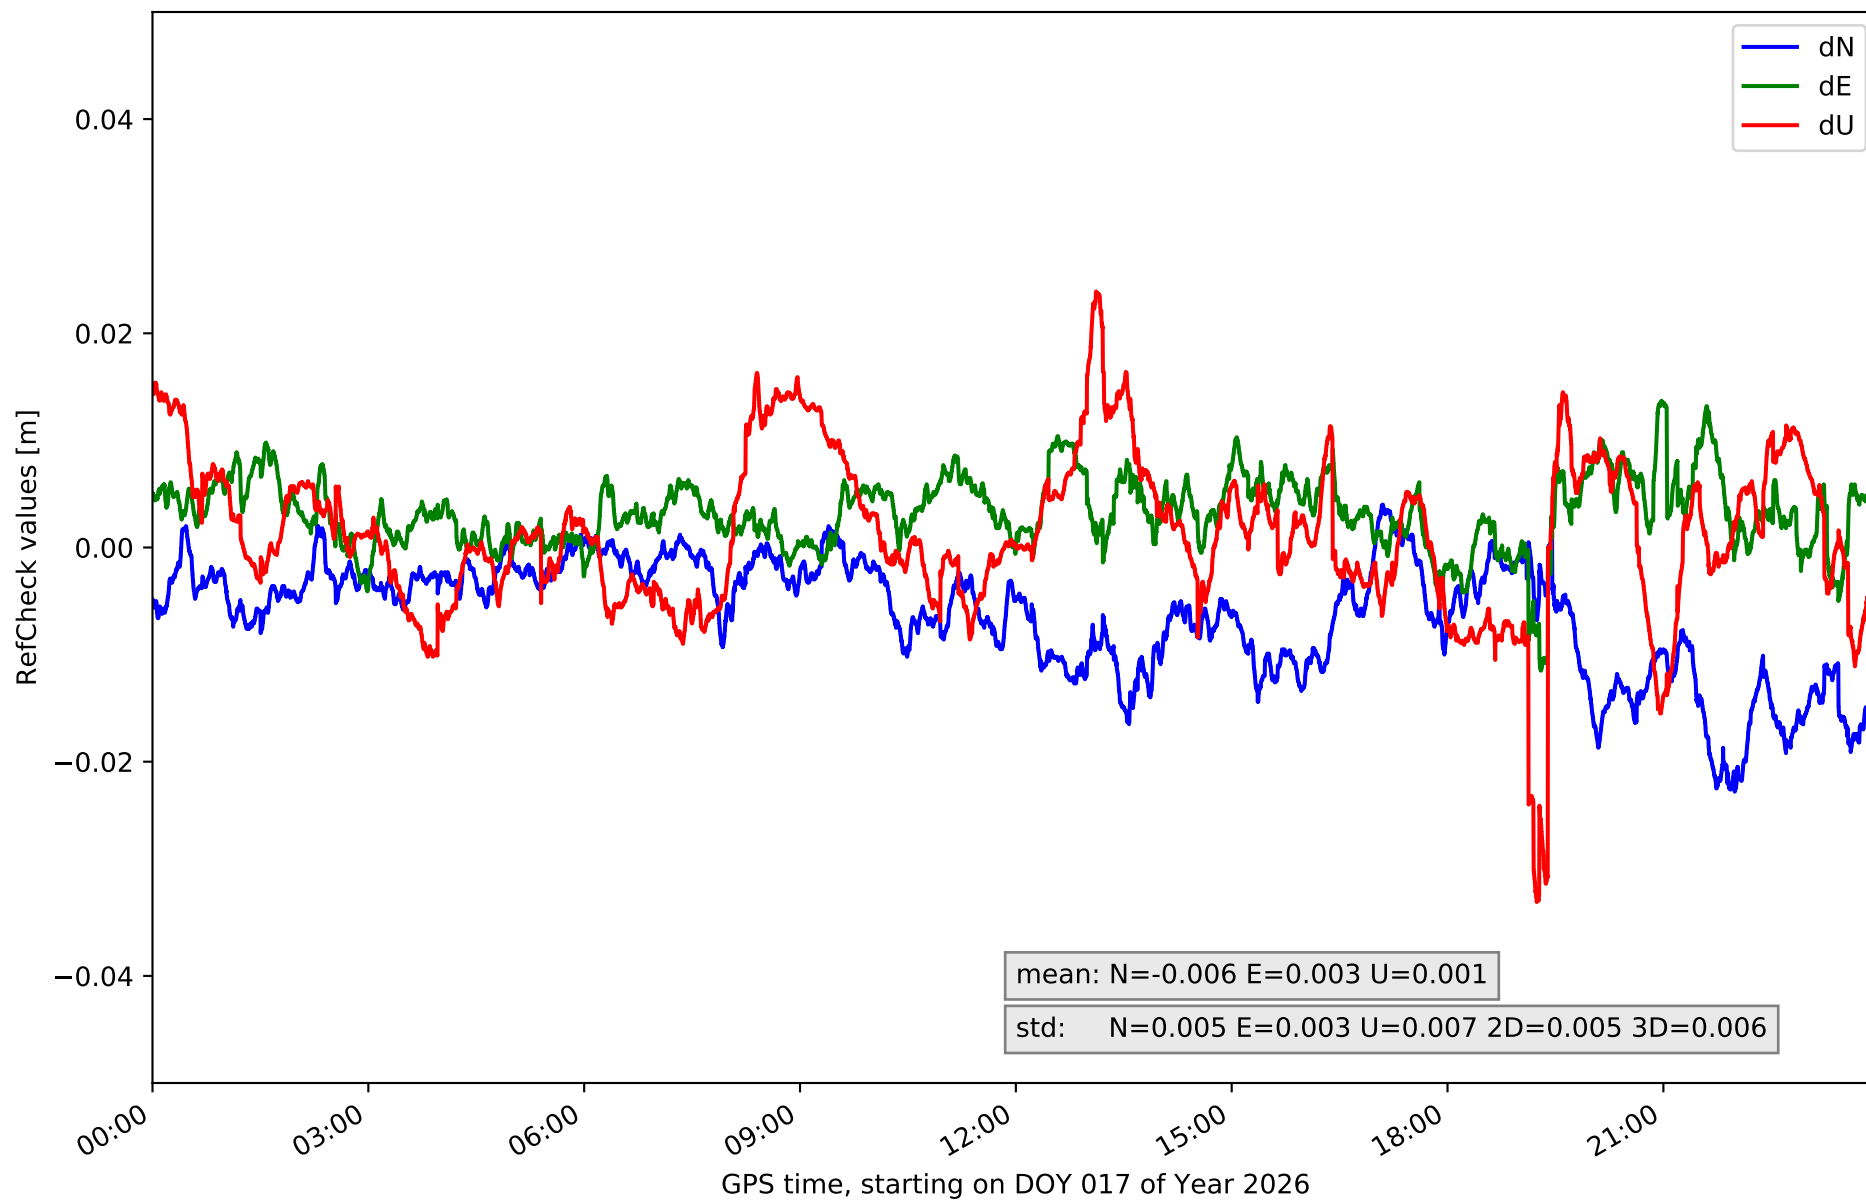


RefCheck for station LPAL in network N32T

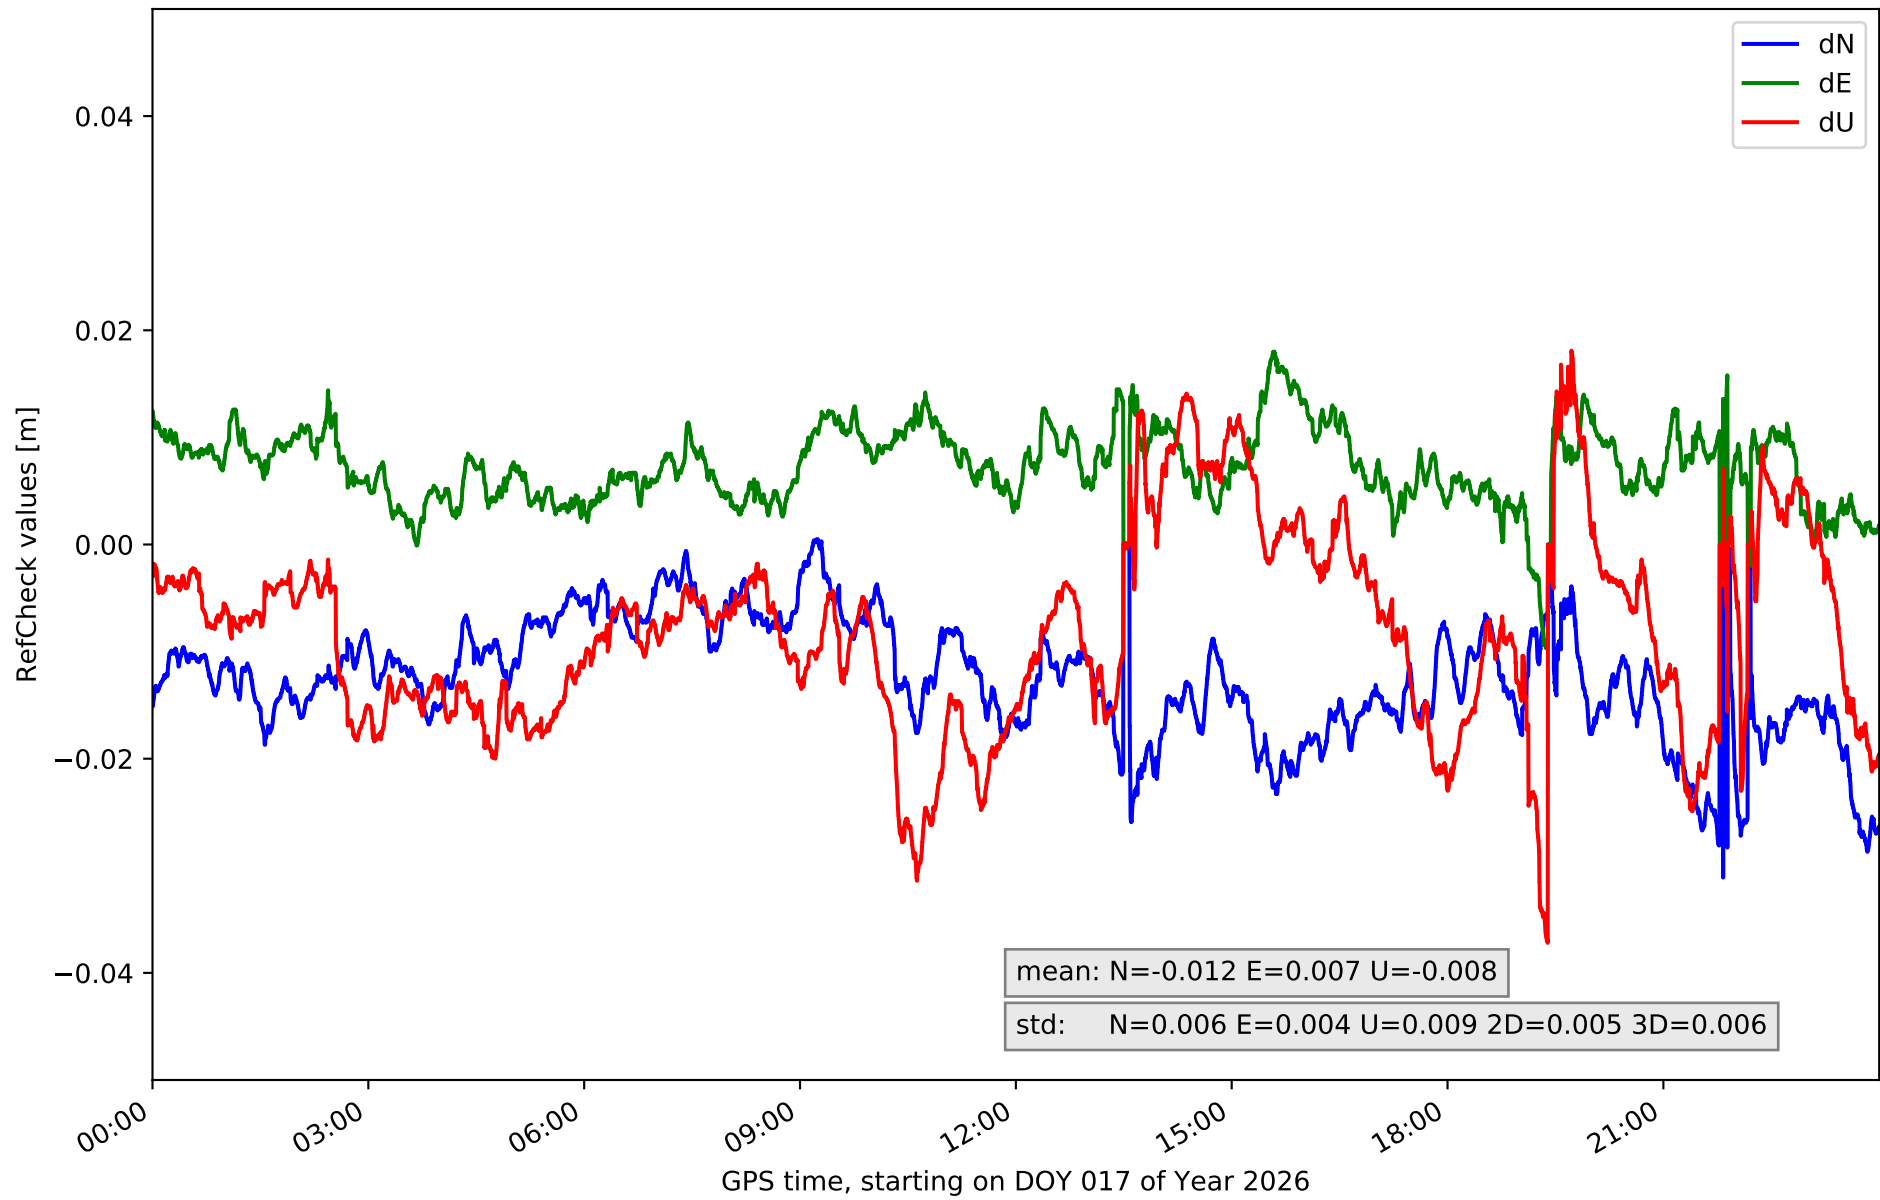


RefCheck for station LRES in network N32T

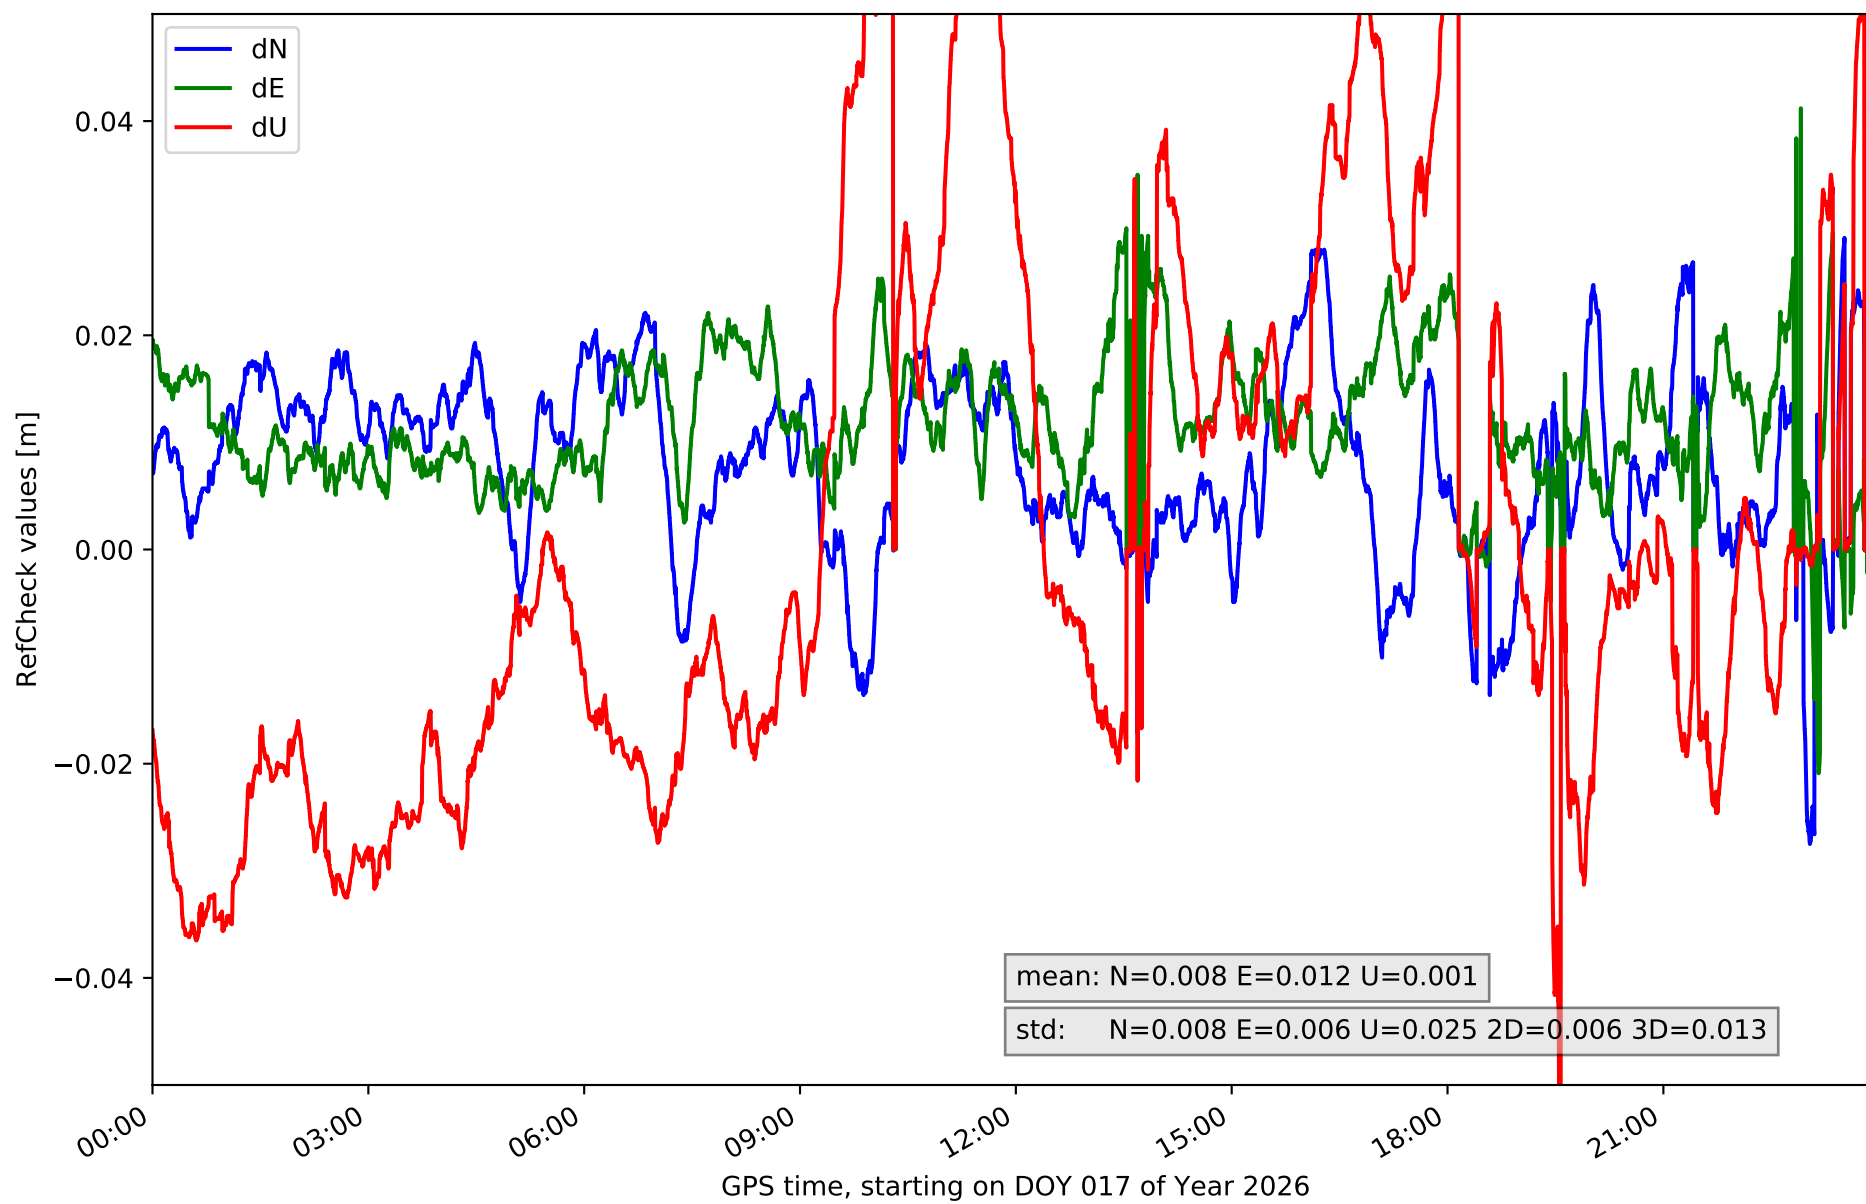


RefCheck for station TN01 in network N32T

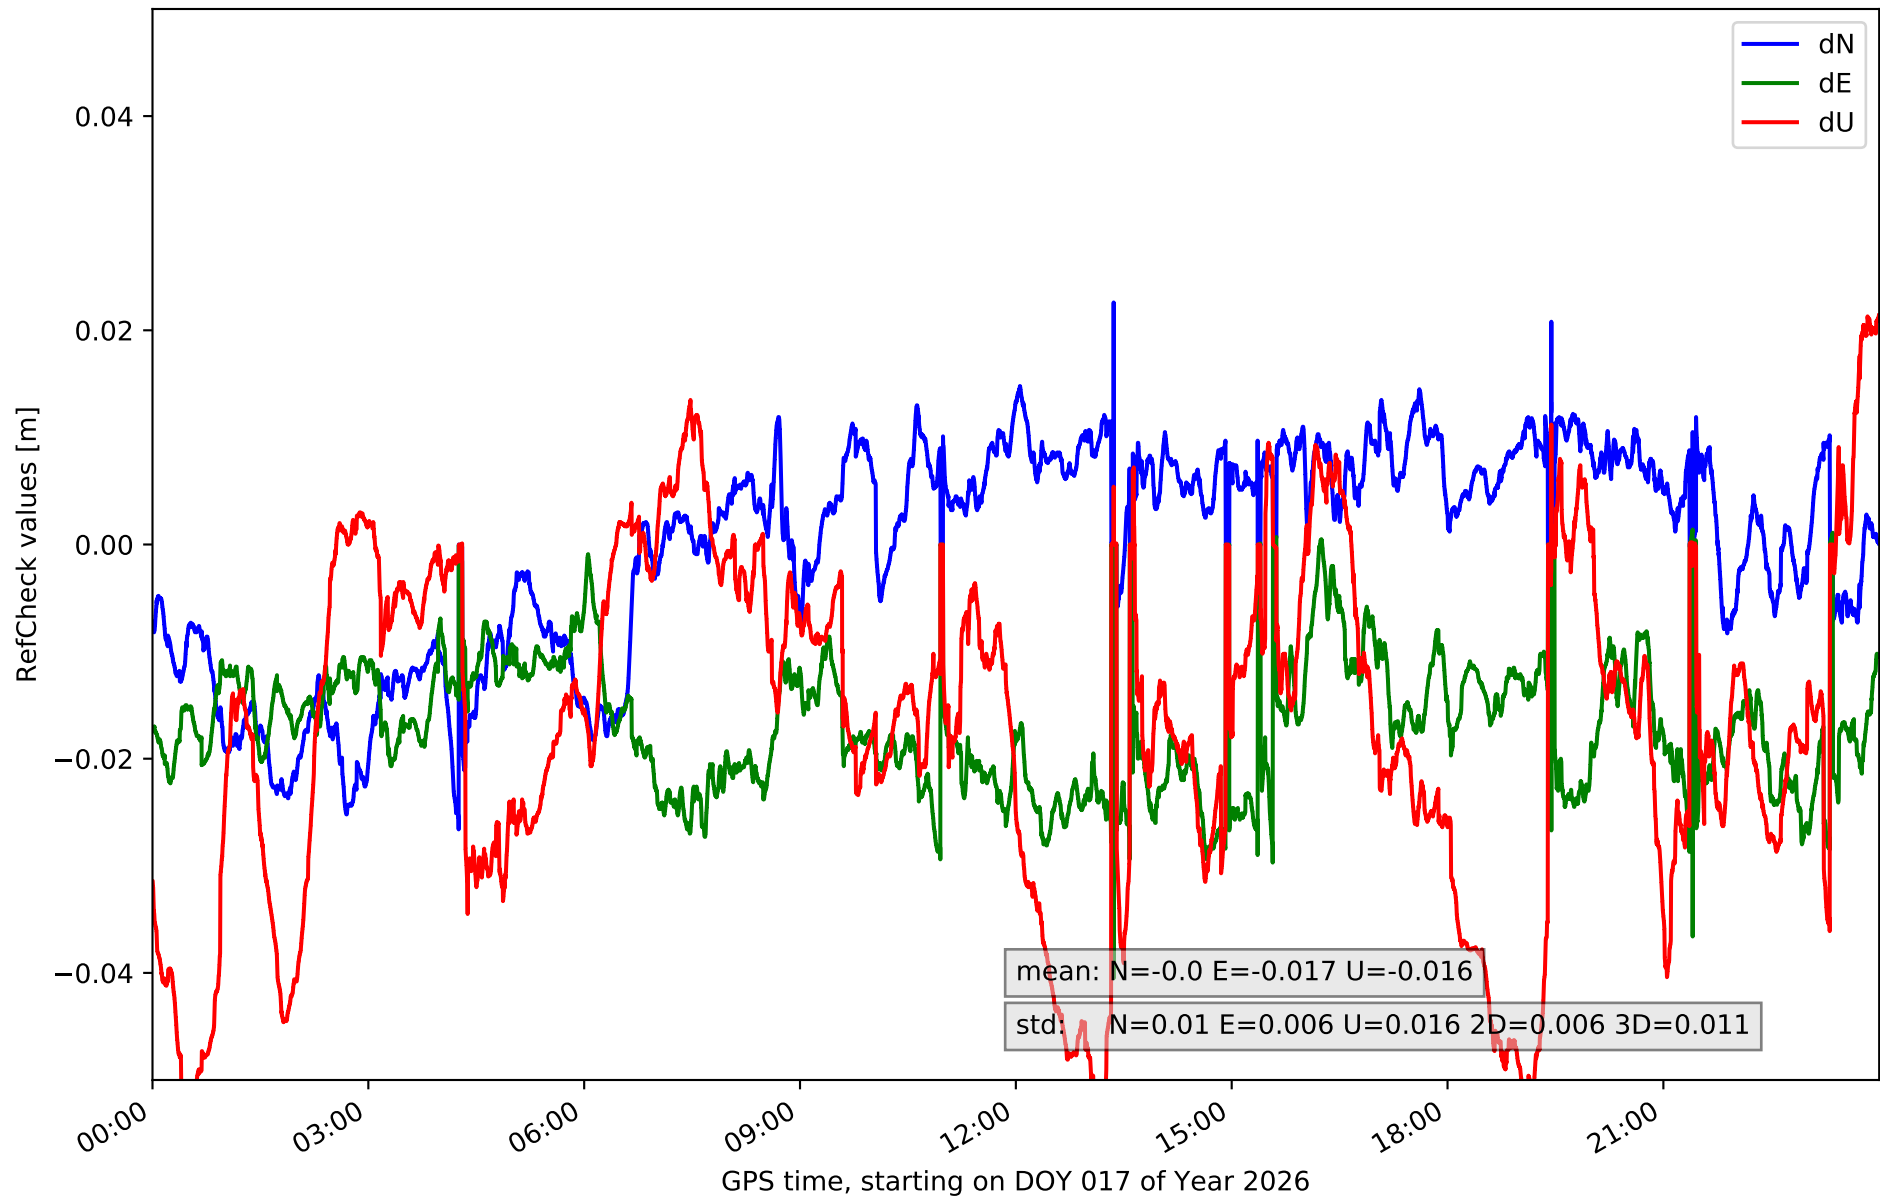


RefCheck for station TN02 in network N32T

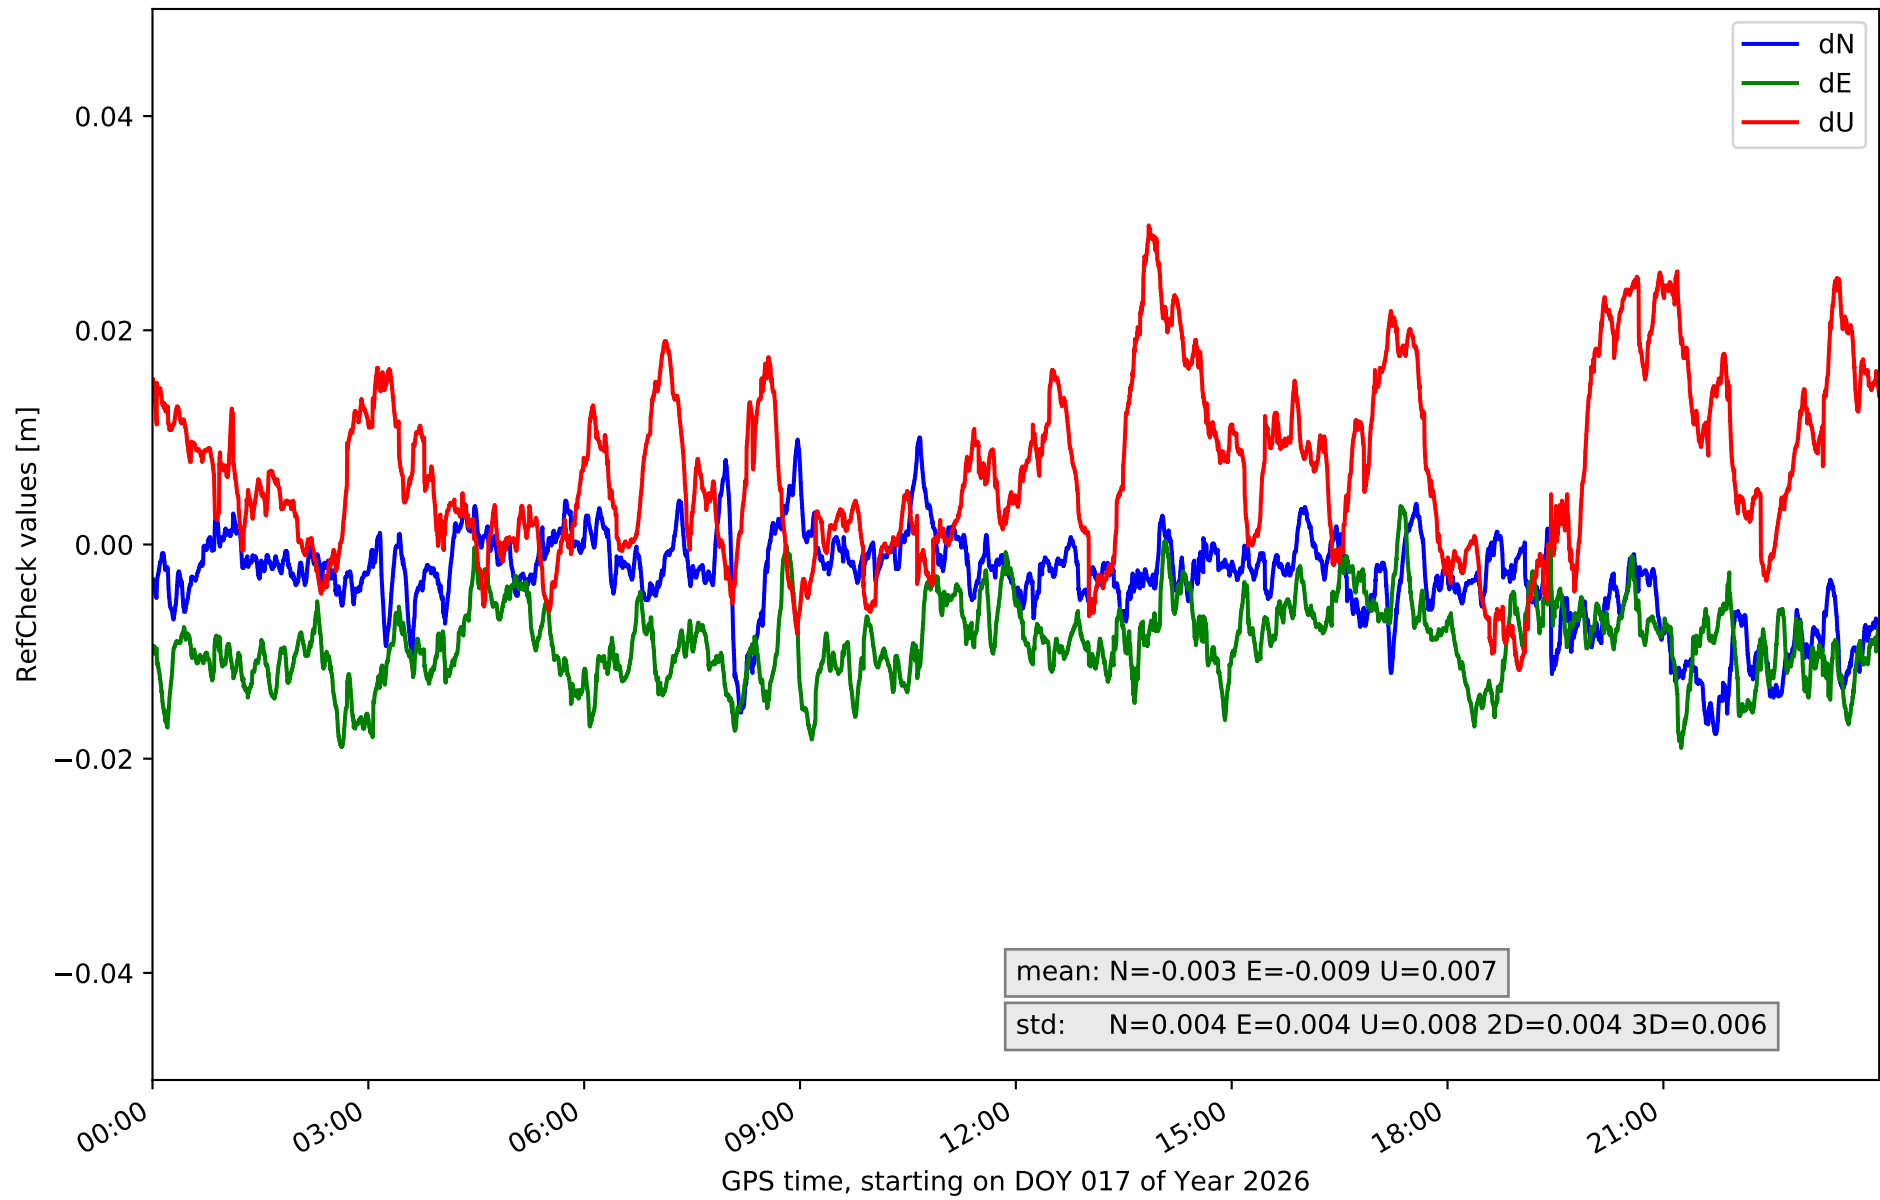


RefCheck for station TN03 in network N32T

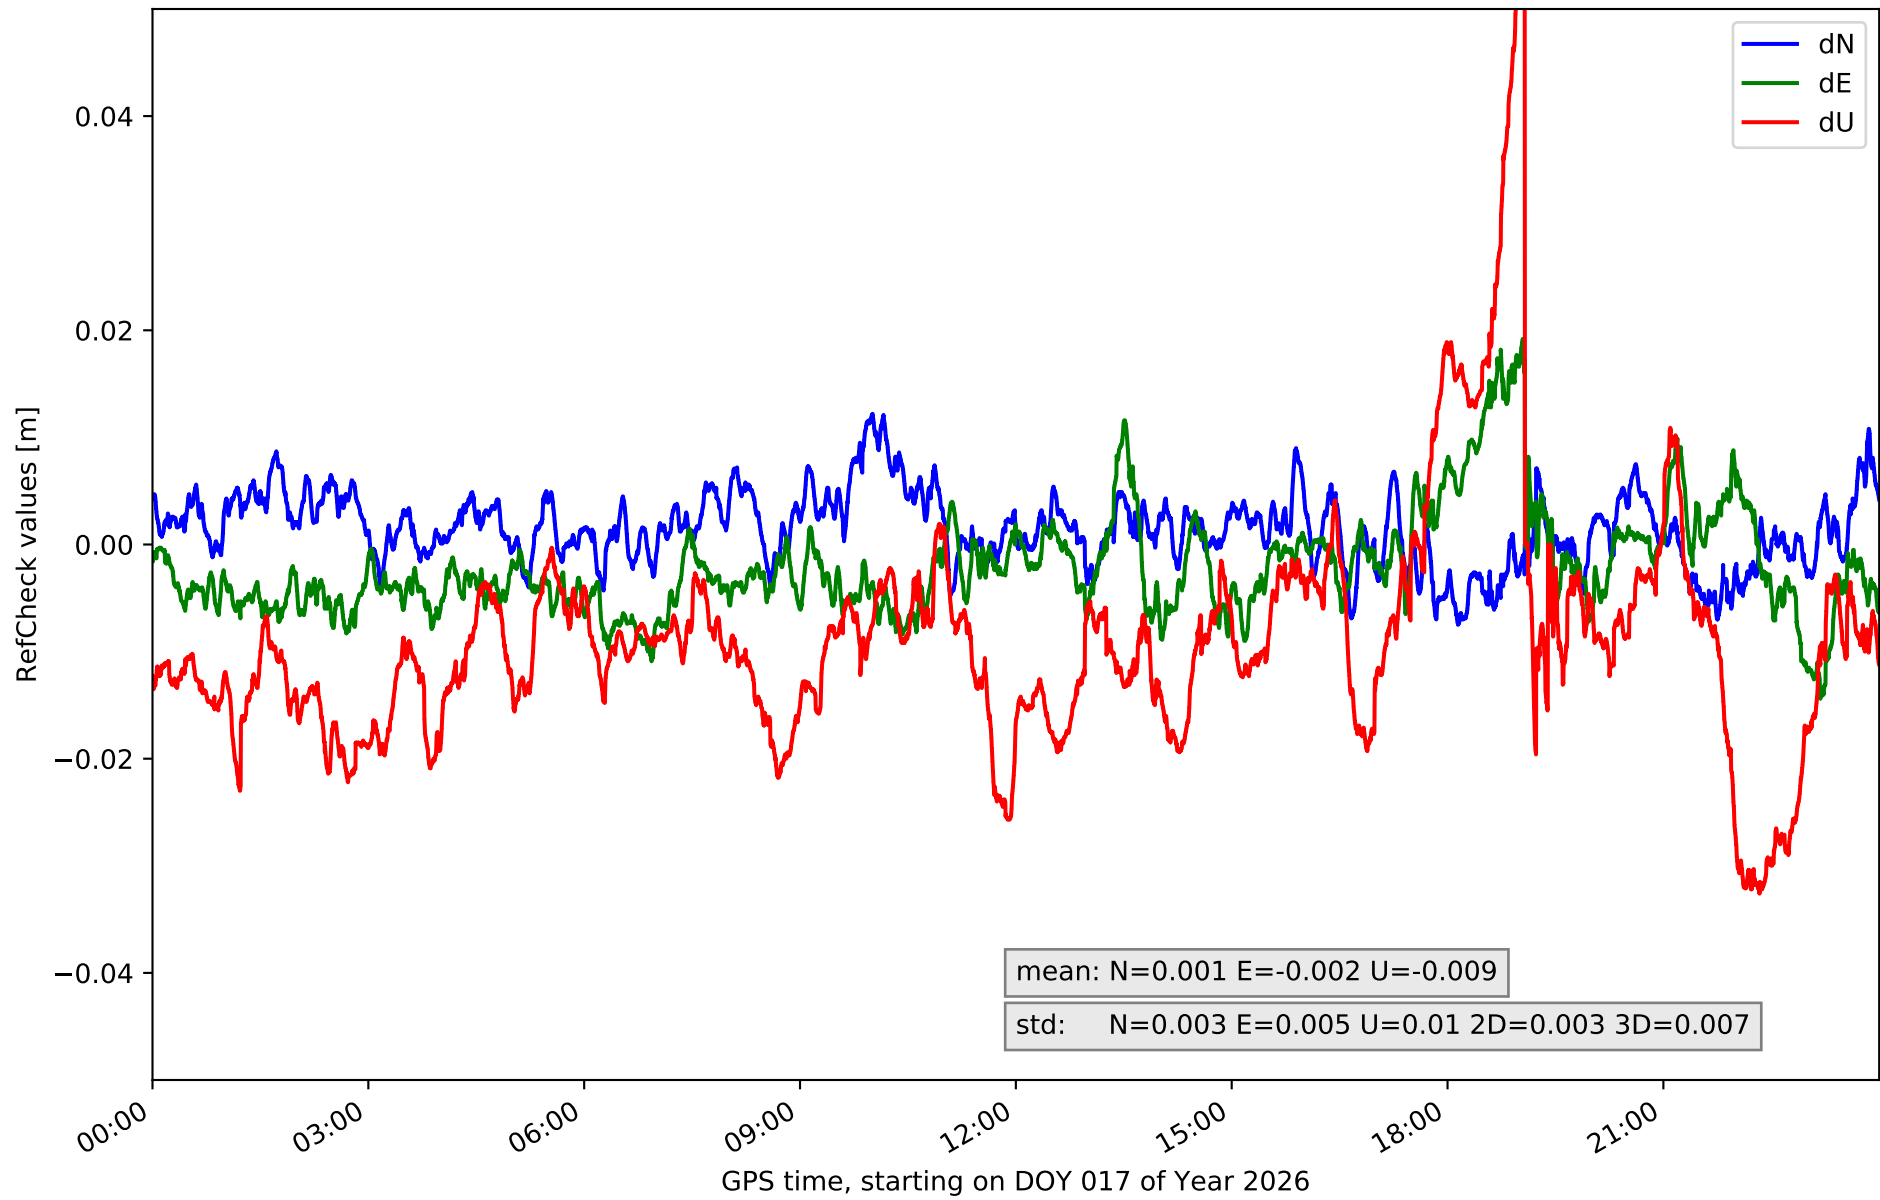


RefCheck for station TN06 in network N32T

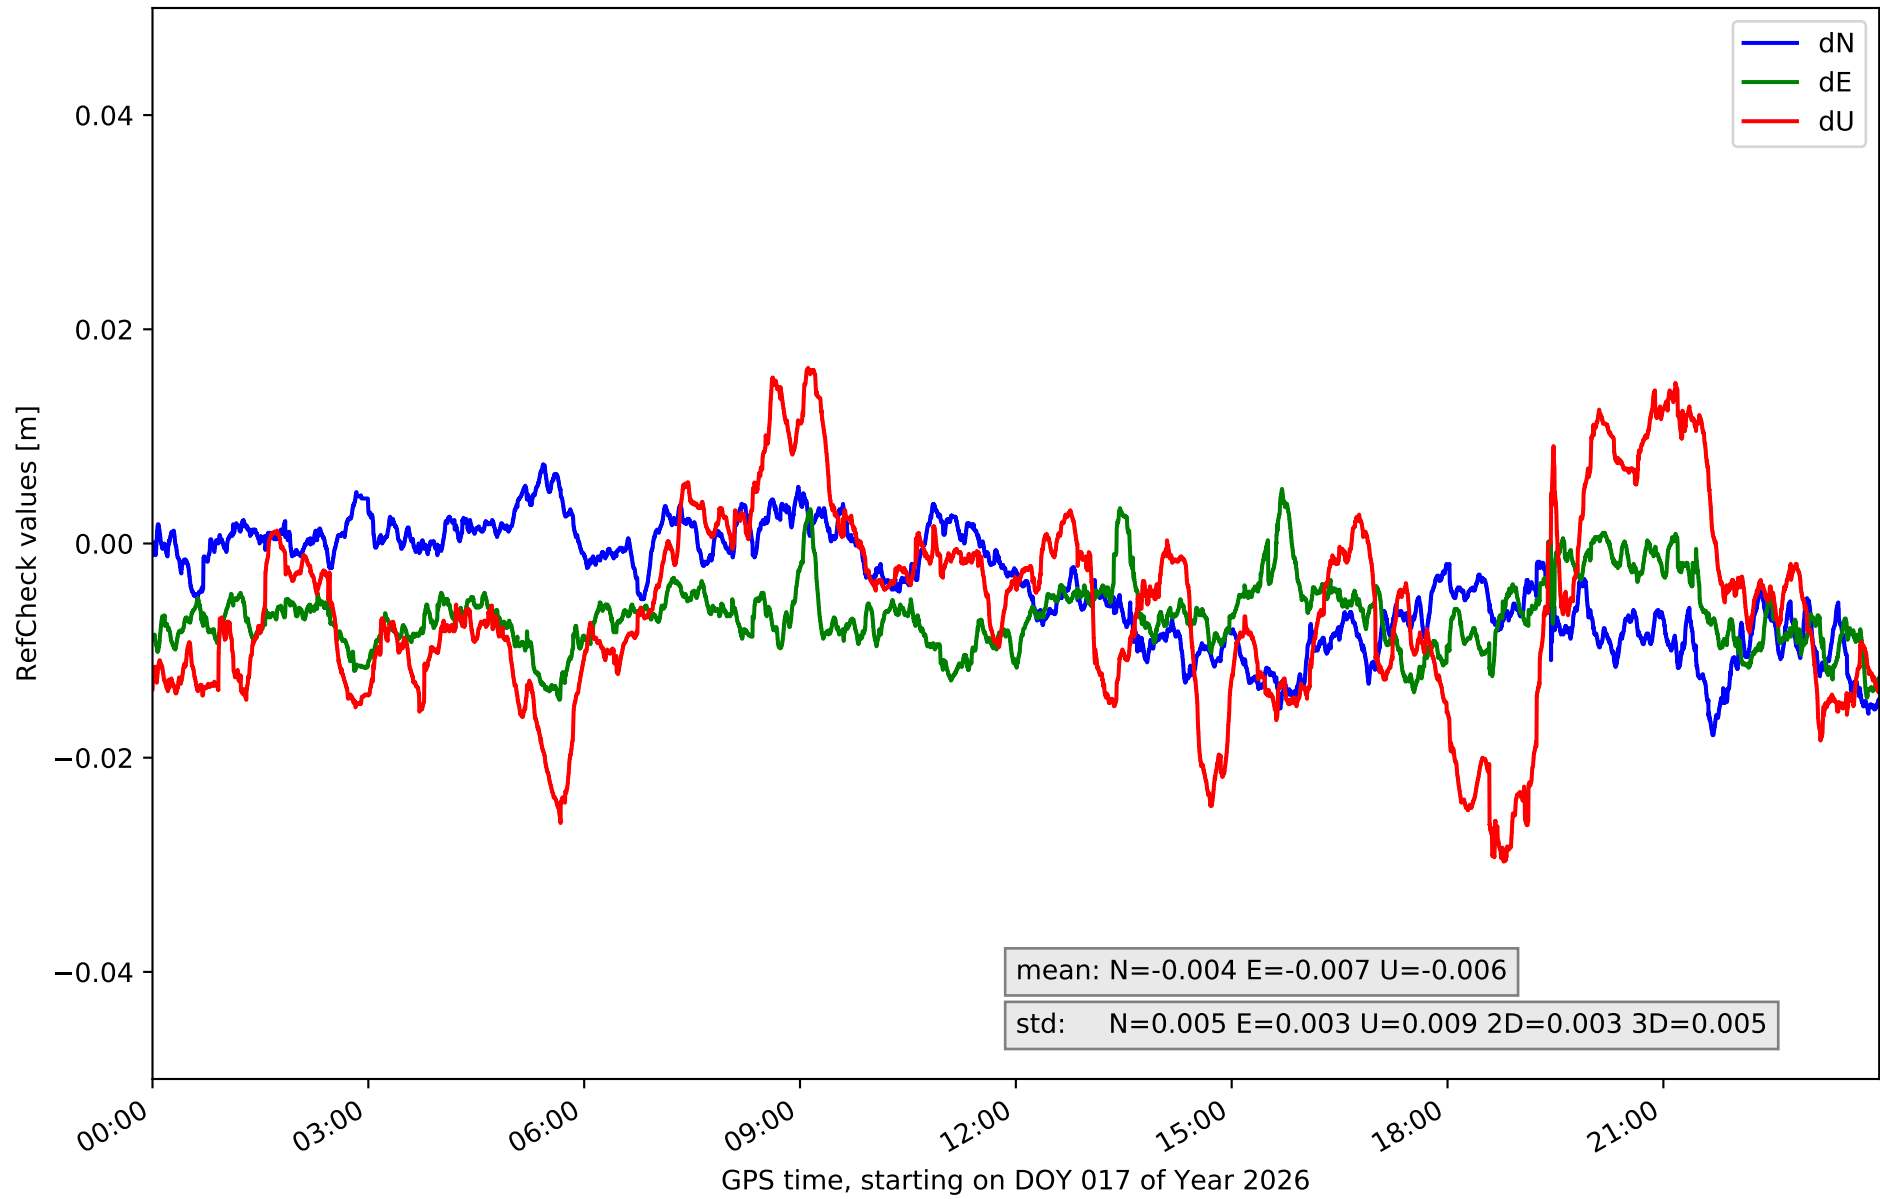

RefCheck for station TN09 in network N32T

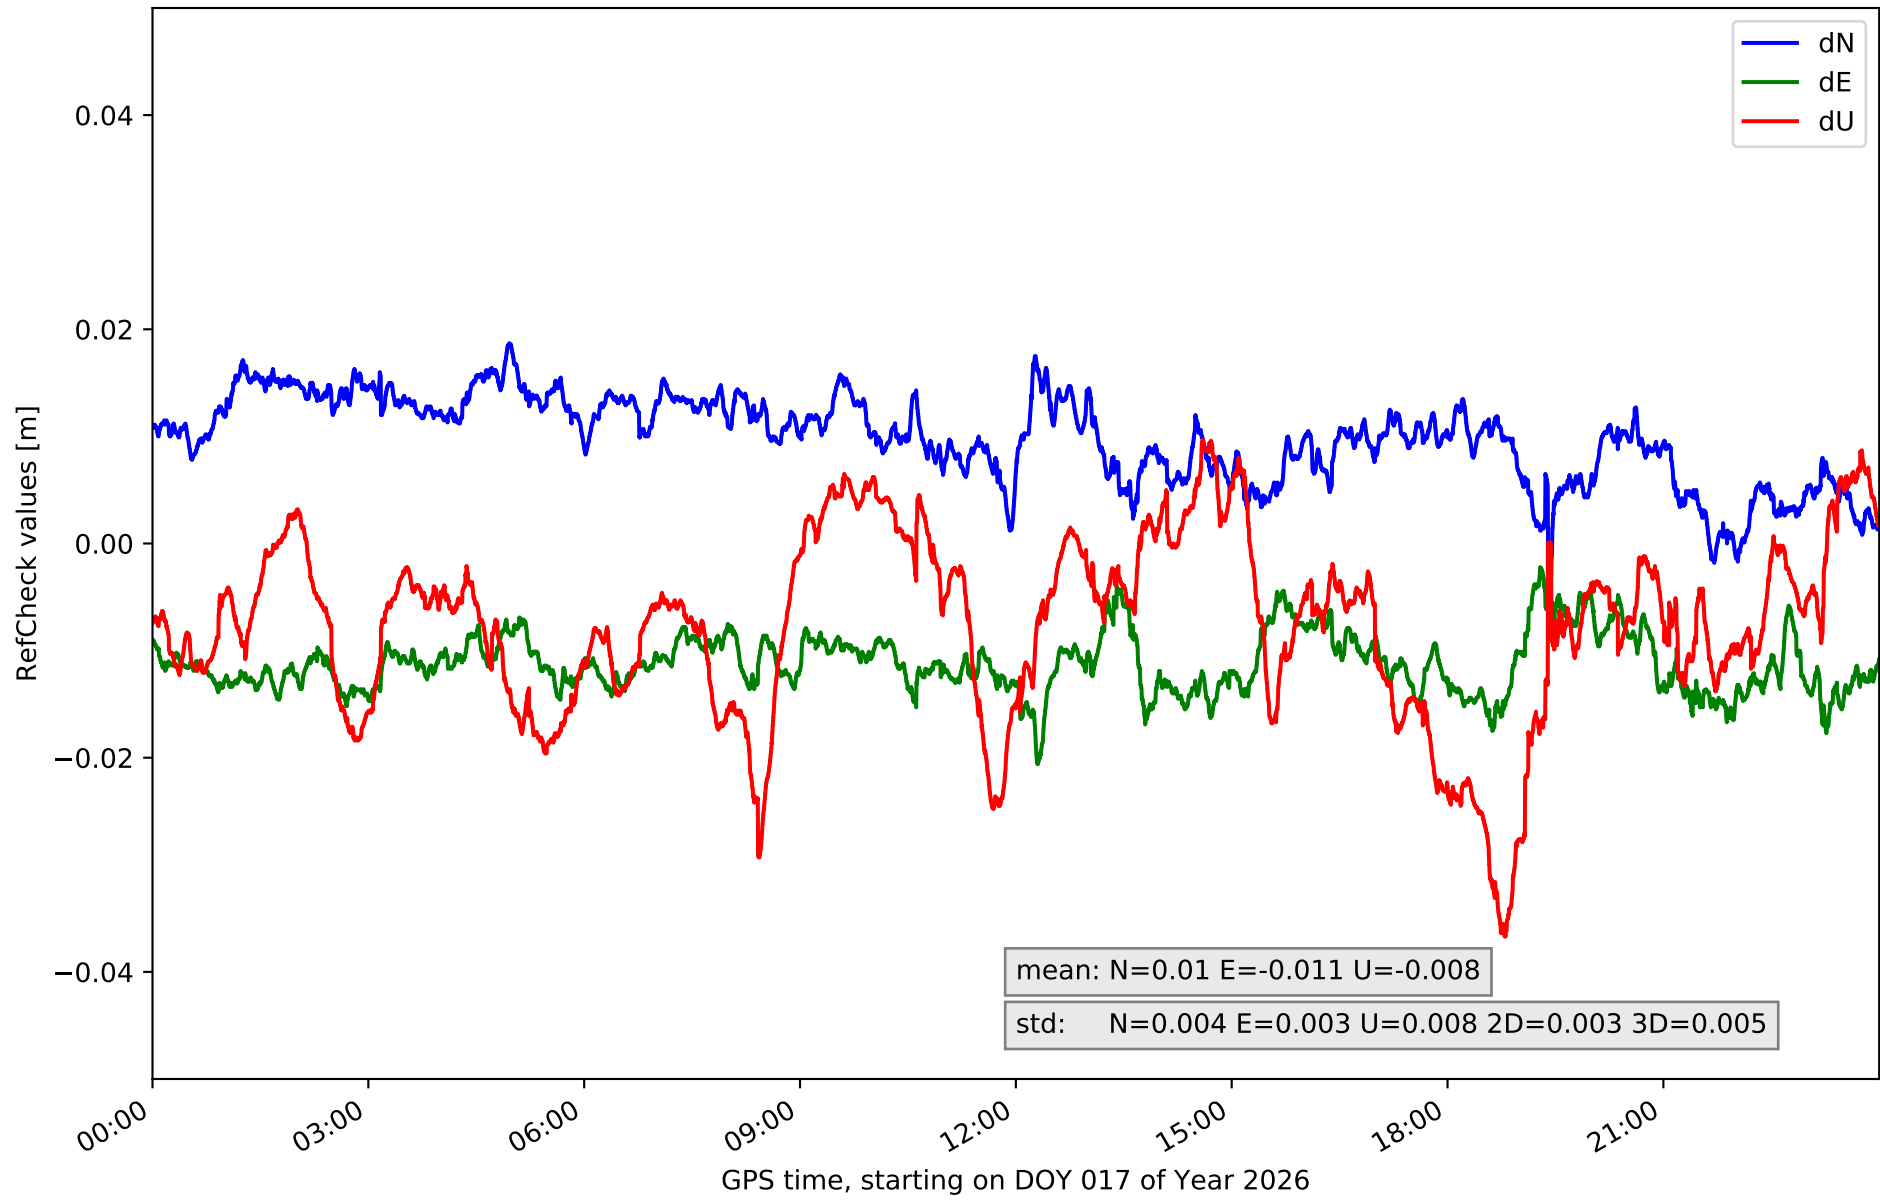

RefCheck for station TE11 in network N32T

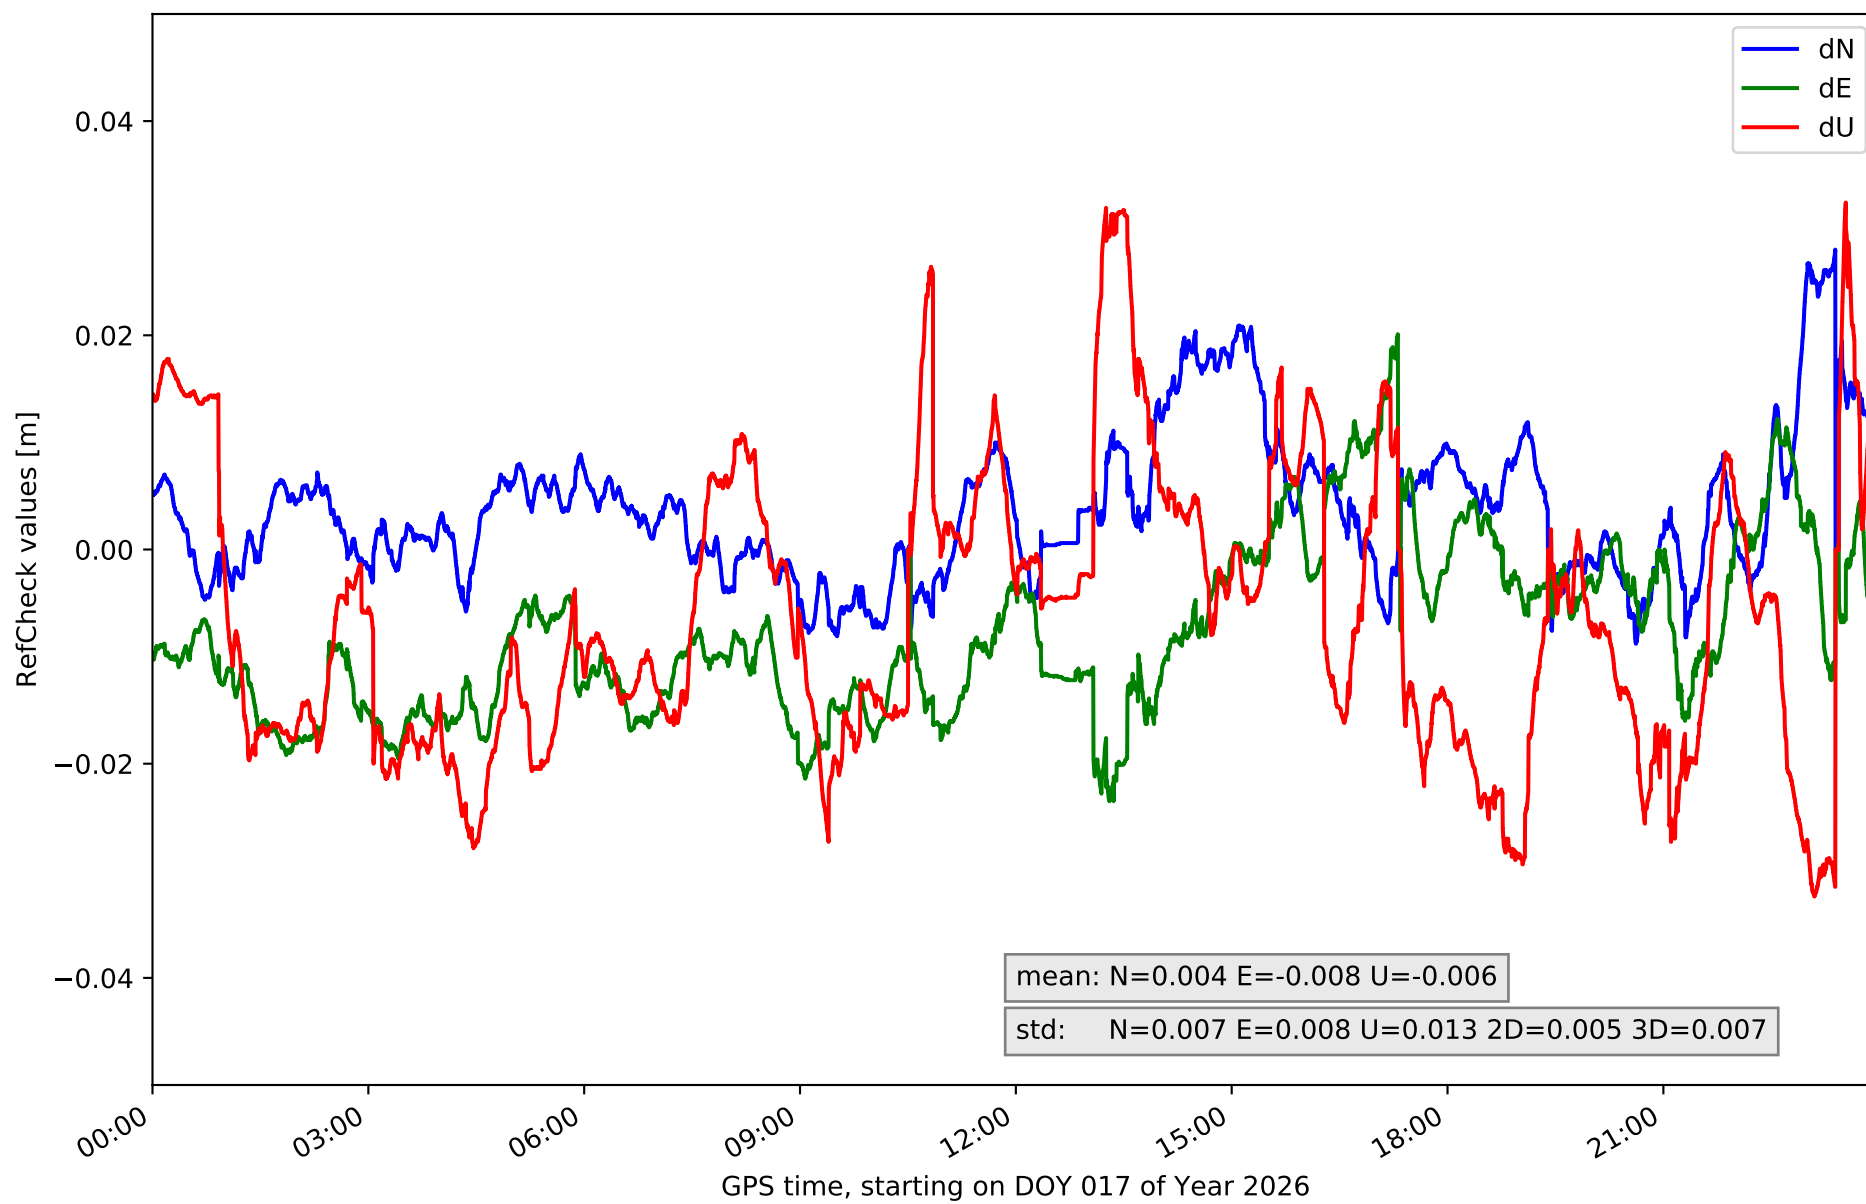

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.01	0.012	0.004	-0.0	0.029	0.005	-0.019	0.03	0.009	0.004	0.005	64318	83.3	15598	20.2
EH02	-0.007	0.028	0.005	-0.005	0.044	0.007	-0.043	0.046	0.019	0.005	0.009	75140	97.3	73789	95.6
GOM1	-0.017	0.025	0.008	-0.027	0.022	0.007	-0.06	0.06	0.021	0.006	0.012	46222	59.9	40684	52.7
GOME	-0.008	0.024	0.005	-0.019	0.009	0.005	-0.049	0.049	0.019	0.005	0.01	22492	29.1	26770	34.7
IZAN	-0.019	0.009	0.005	-0.026	0.01	0.004	-0.036	0.033	0.01	0.004	0.007	43617	56.5	28652	37.1
LP01	-0.025	-0.0	0.004	-0.012	0.016	0.004	-0.013	0.033	0.009	0.004	0.007	51480	66.7	17805	23.1
LP03	-0.023	0.004	0.005	-0.011	0.014	0.003	-0.033	0.024	0.007	0.005	0.006	23315	30.2	5718	7.4
LPAL	-0.031	0.001	0.006	-0.01	0.018	0.004	-0.037	0.018	0.009	0.005	0.006	62320	80.7	29111	37.7
LRES	-0.028	0.029	0.008	-0.021	0.041	0.006	-0.06	0.06	0.025	0.006	0.013	66648	86.3	55198	71.5
TN01	-0.027	0.023	0.01	-0.041	0.001	0.006	-0.054	0.021	0.016	0.006	0.011	74177	96.1	64097	83.0
TN02	-0.018	0.01	0.004	-0.019	0.004	0.004	-0.012	0.03	0.008	0.004	0.006	42678	55.3	13717	17.8
TN03	-0.007	0.012	0.003	-0.014	0.019	0.005	-0.033	0.061	0.01	0.003	0.007	5678	7.4	9515	12.3
TN06	-0.018	0.007	0.005	-0.015	0.005	0.003	-0.03	0.016	0.009	0.003	0.005	28611	37.1	9954	12.9
TN09	-0.003	0.019	0.004	-0.021	-0.0	0.003	-0.037	0.01	0.008	0.003	0.005	71205	92.2	23294	30.2
TE11	-0.009	0.028	0.007	-0.024	0.02	0.008	-0.032	0.032	0.013	0.005	0.007	50296	65.1	30211	39.1
Mean	-0.017	0.015	0.006	-0.018	0.017	0.005	-0.037	0.035	0.013	0.005	0.008	48546.5	62.9	29607.5	38.4
Min/Max	-0.031	0.029	0.01	-0.041	0.044	0.008	-0.06	0.061	0.025	0.006	0.013	75140	97.3	73789	95.6

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	92.0	93.0	90.3	93.5	89.8
considering satellites with dual-frequency fixed	88.1	89.1	85.1	90.4	86.2
considering all signals separately	88.3	89.0	85.1	90.8	84.8