

summary for network N32T

timeperiod chosen: from 2026-01-02-00:00:00 until 2026-01-02-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.2 seconds


average fixing percentage with threshold set to 0.3: 87.6 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: LEICA GR50	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

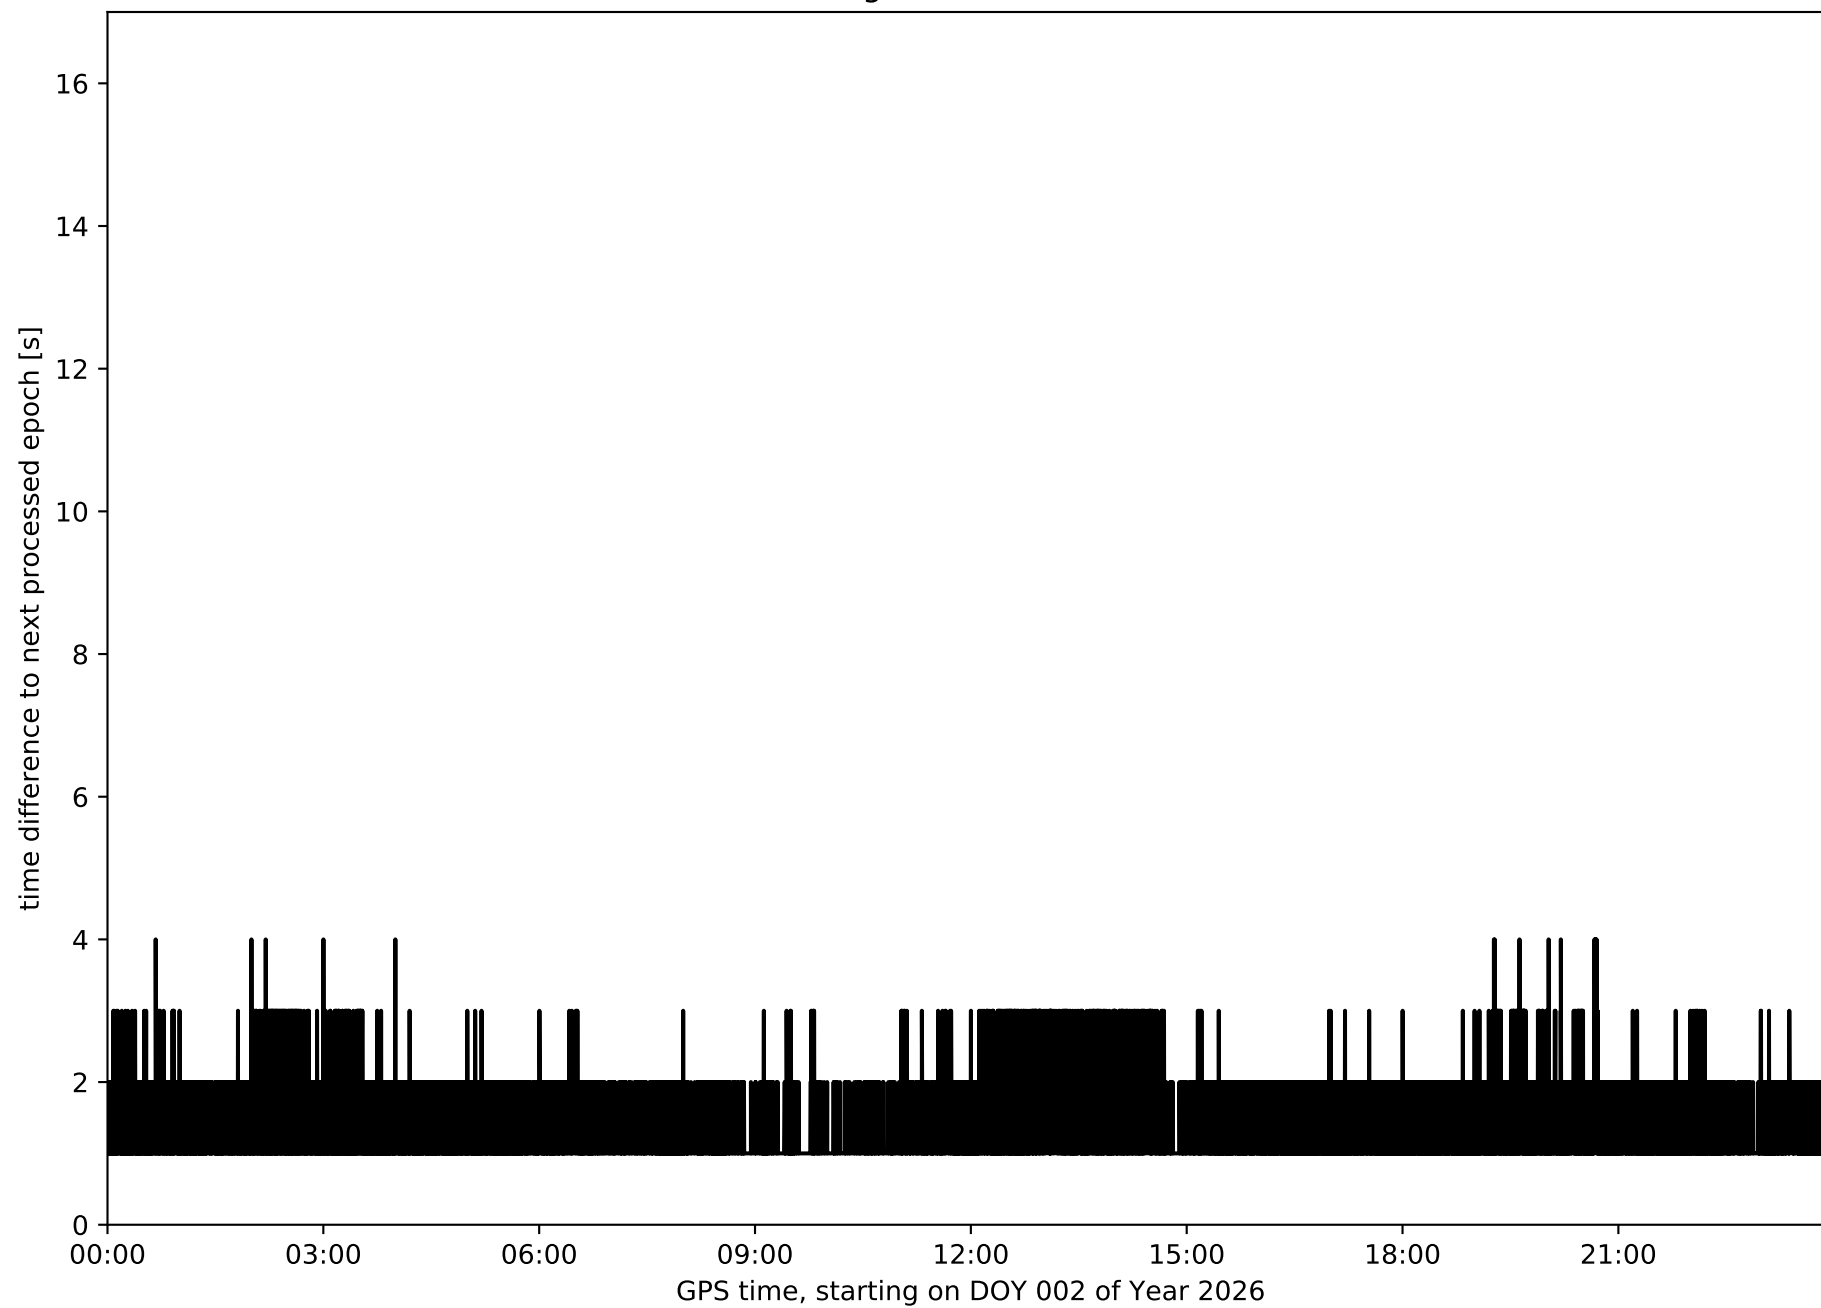


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

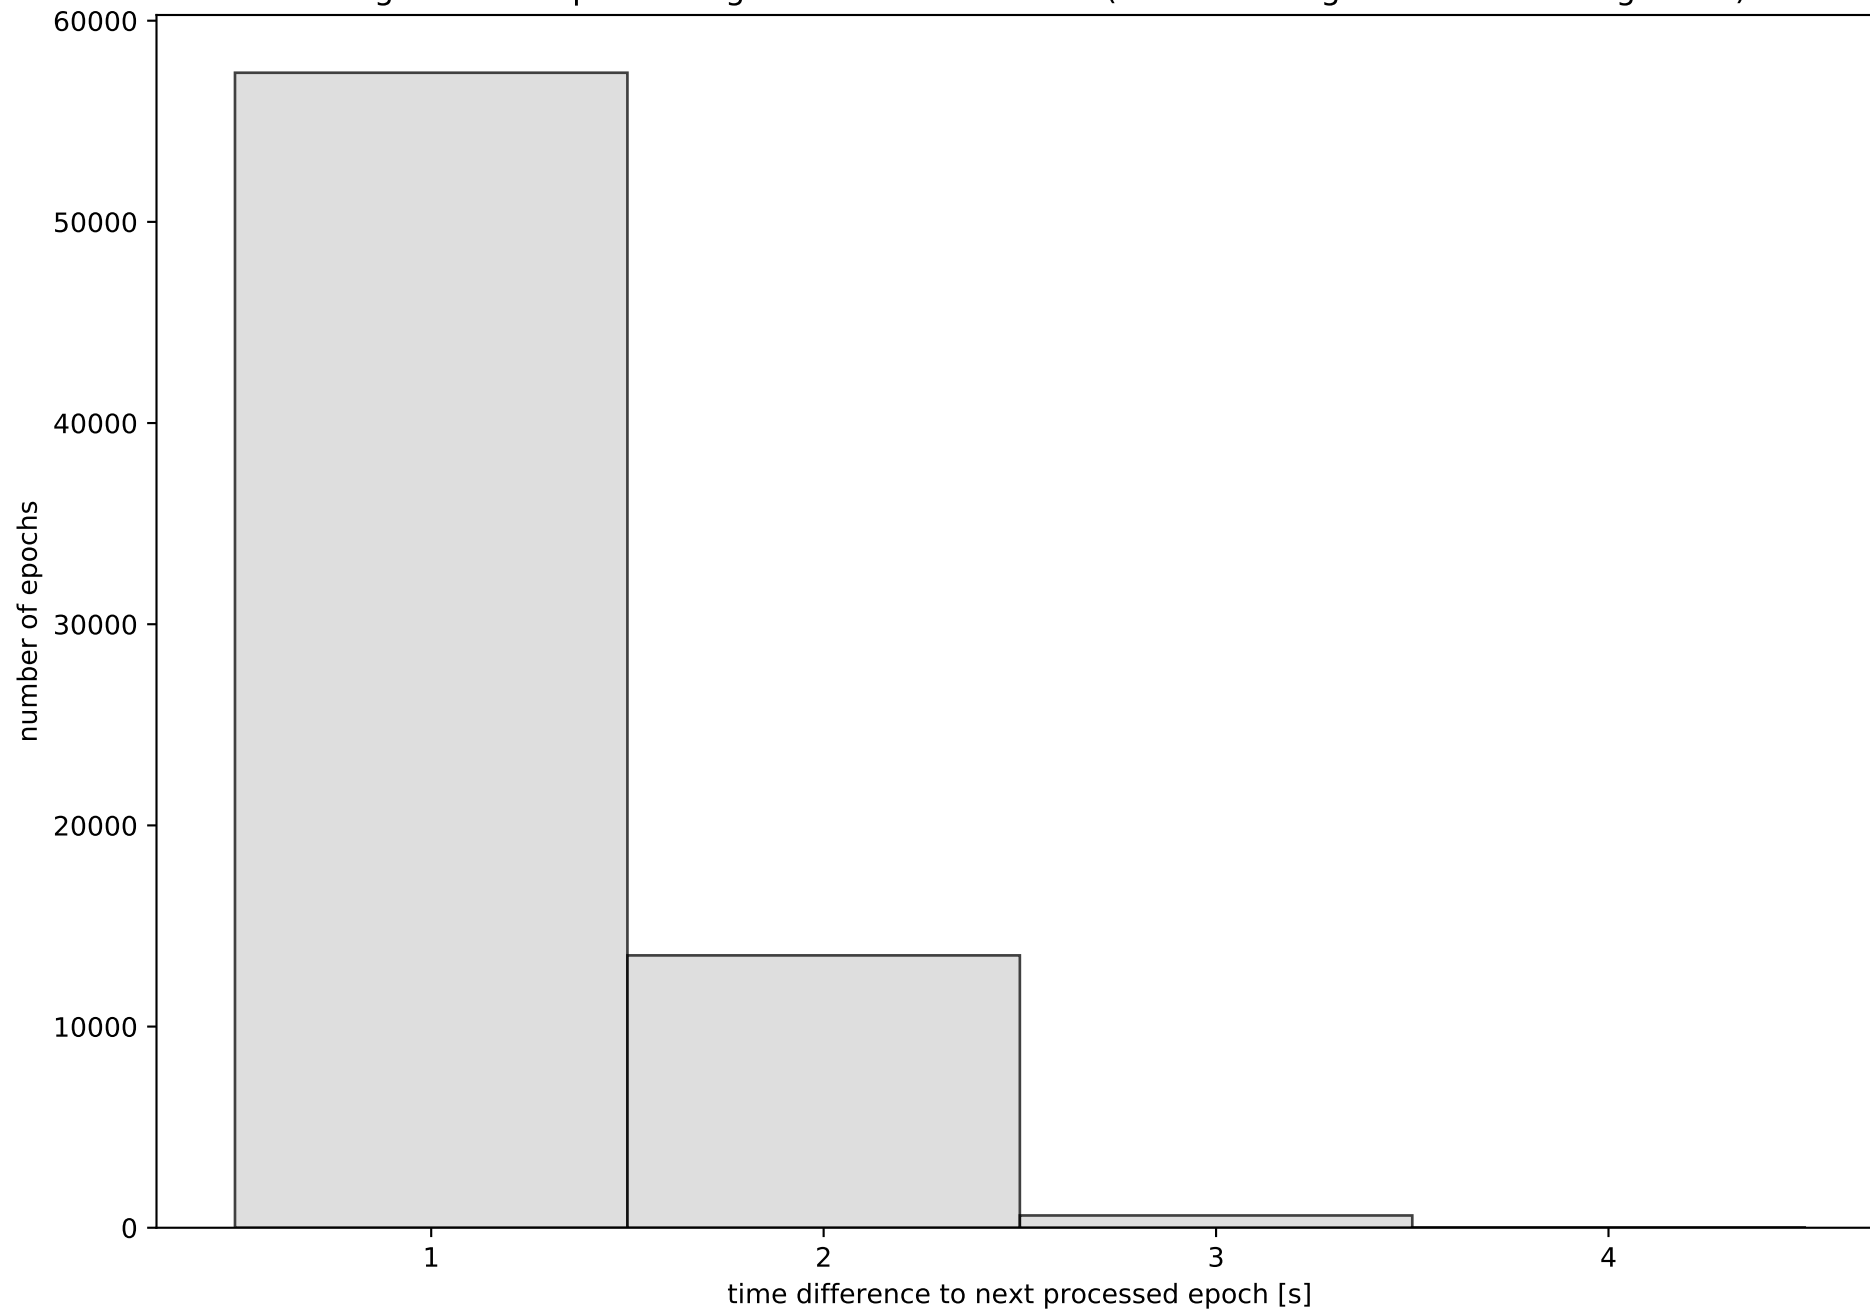


Network N32T with threshold set to 0.3

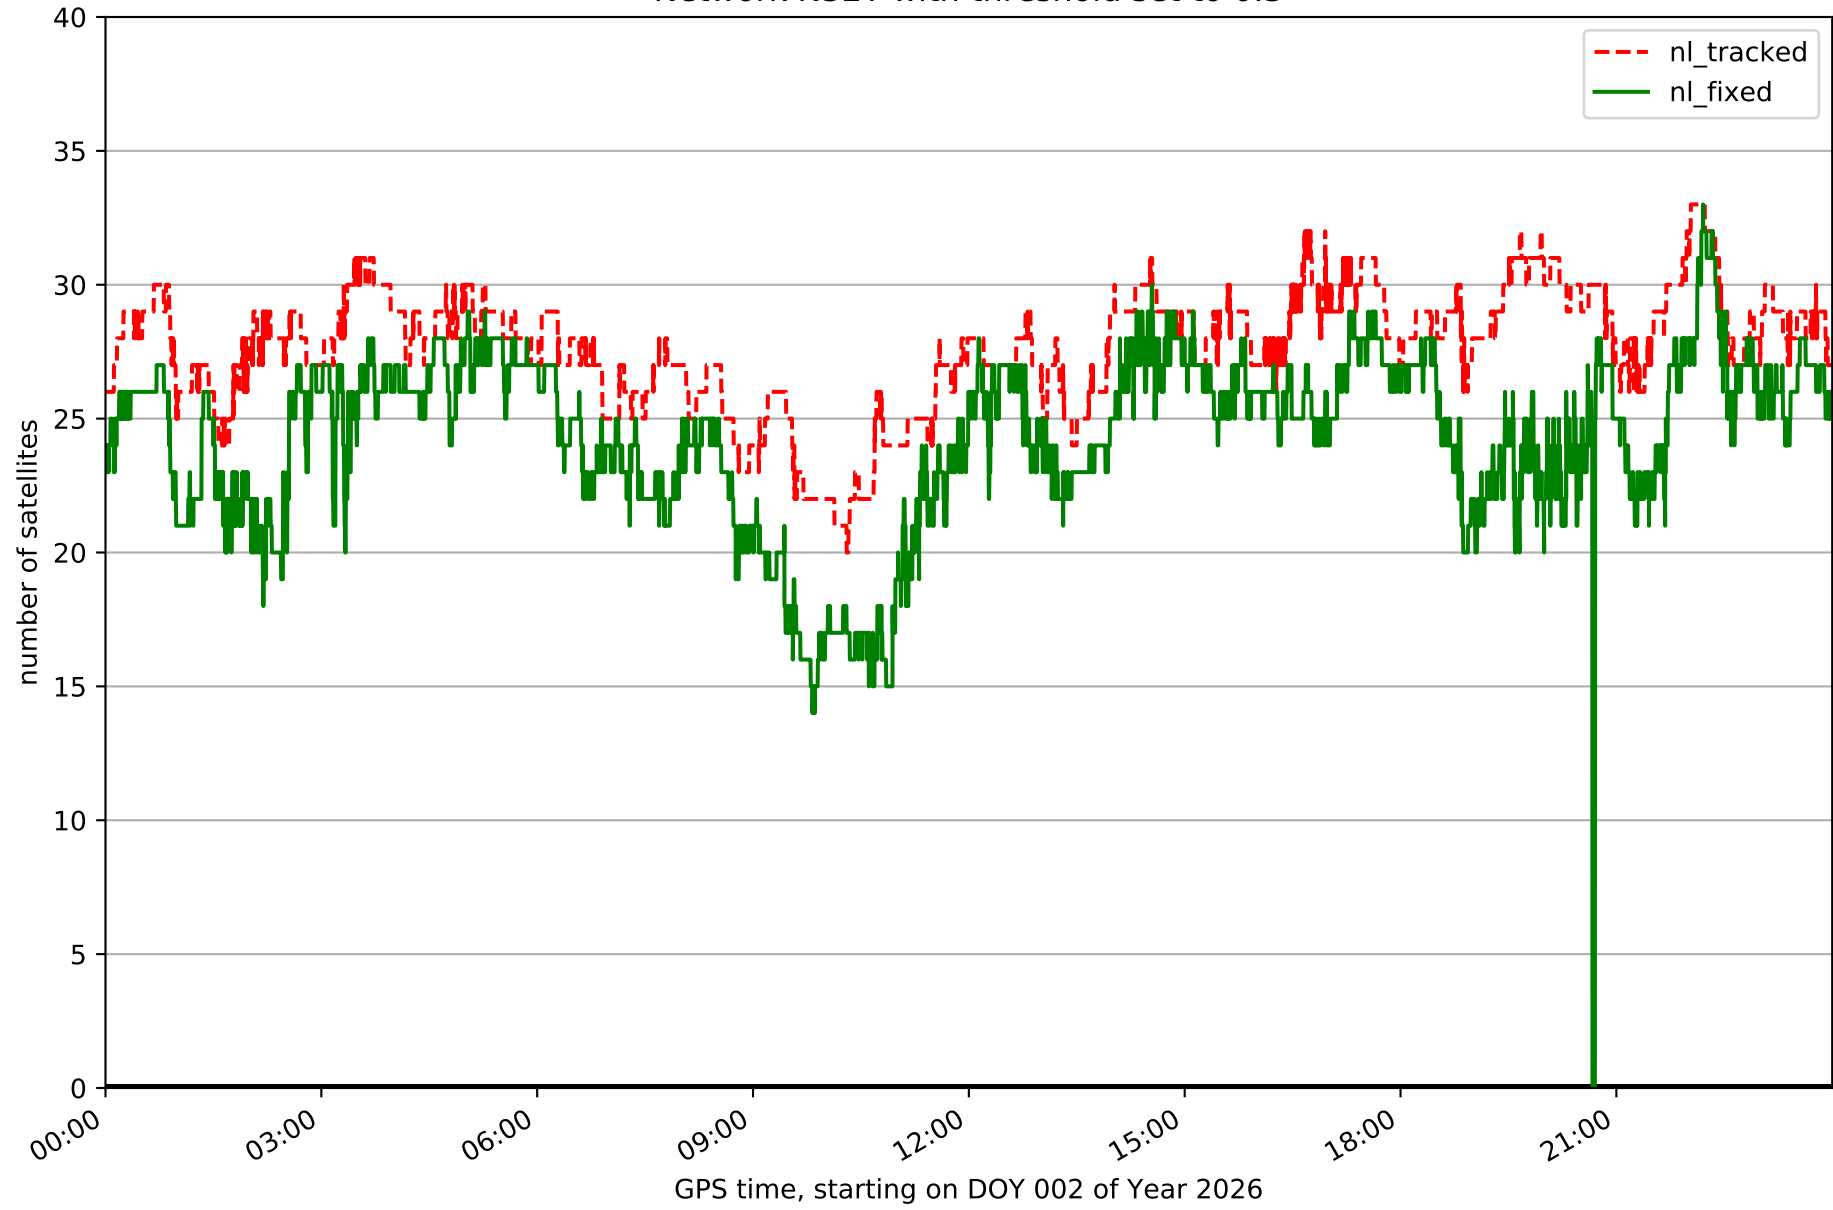


Fixing percentage of satellites in network N32T with threshold set to 0.3

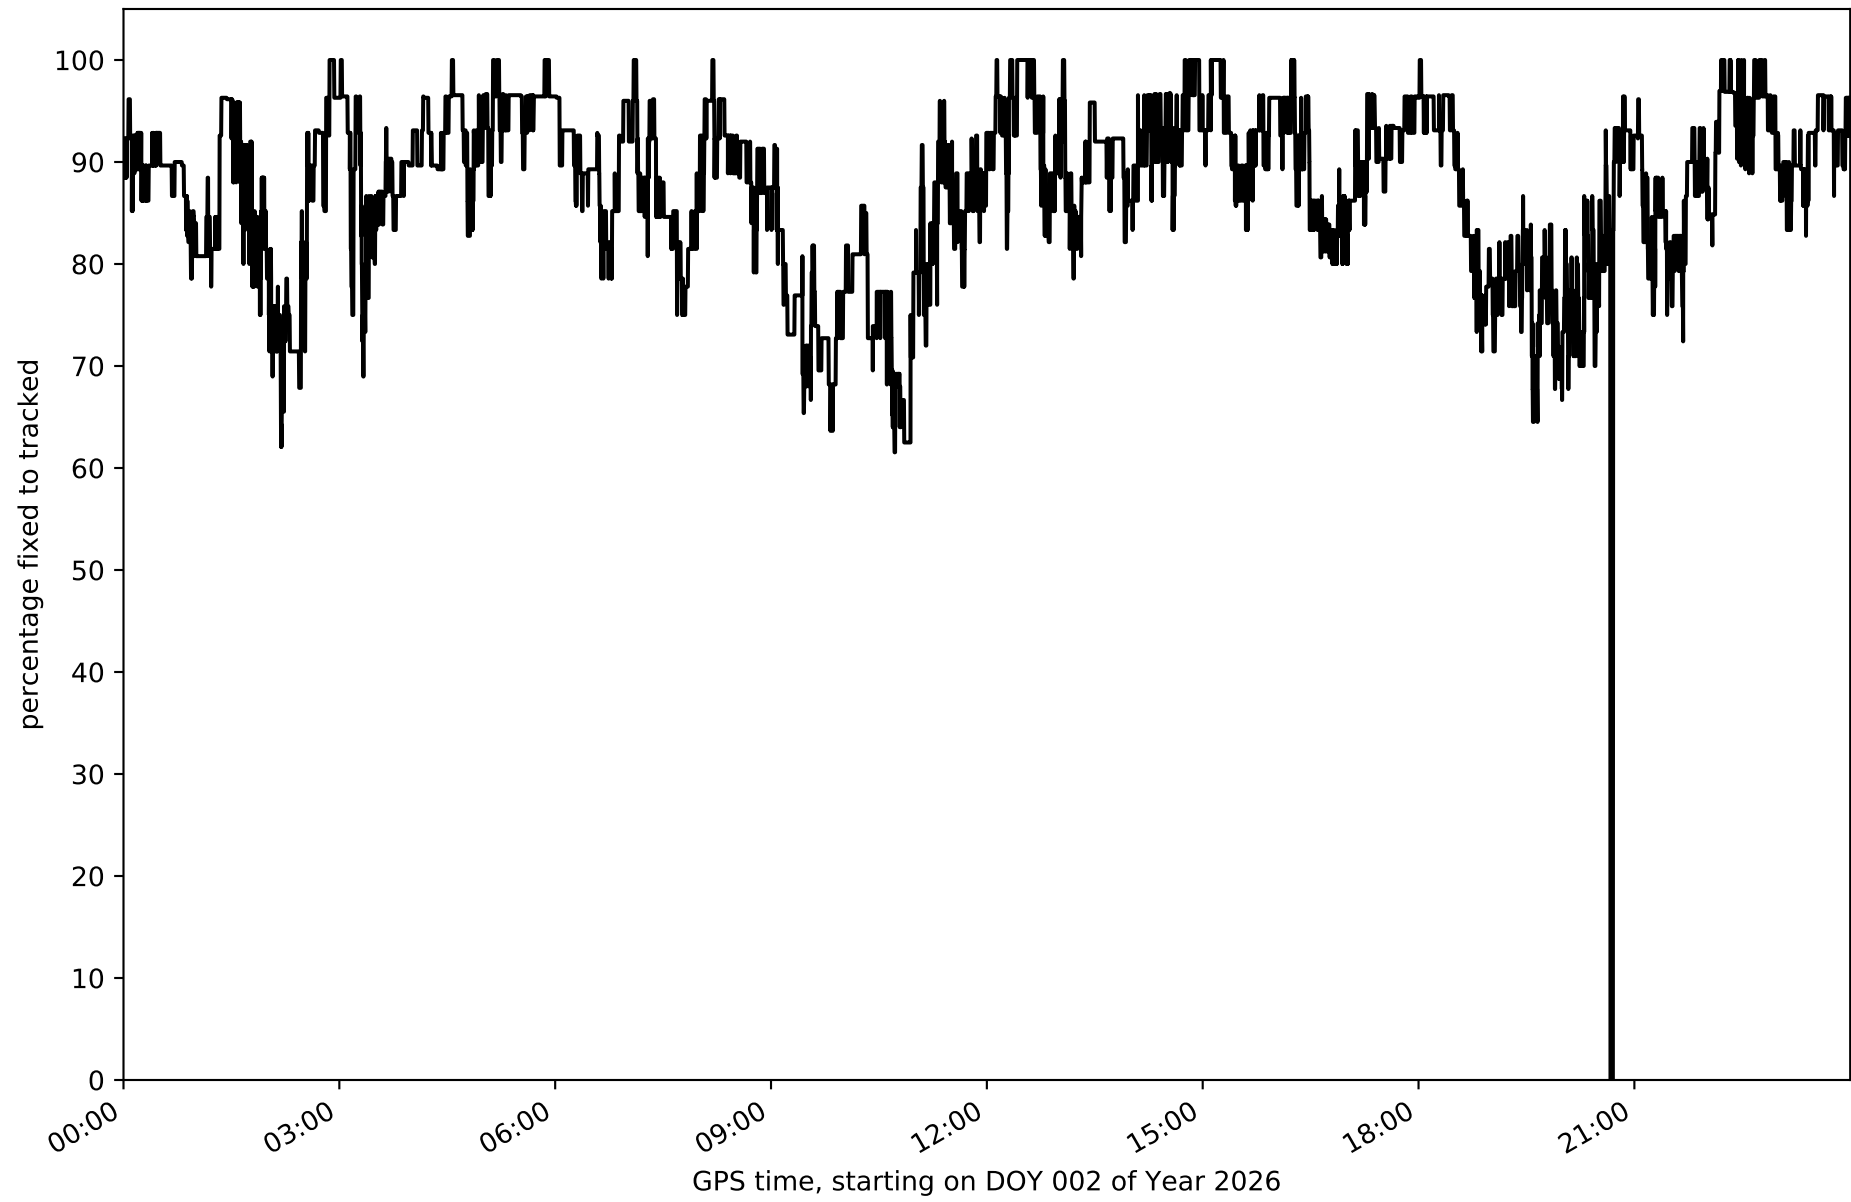


Network N32T - only GPS with threshold set to 0.3

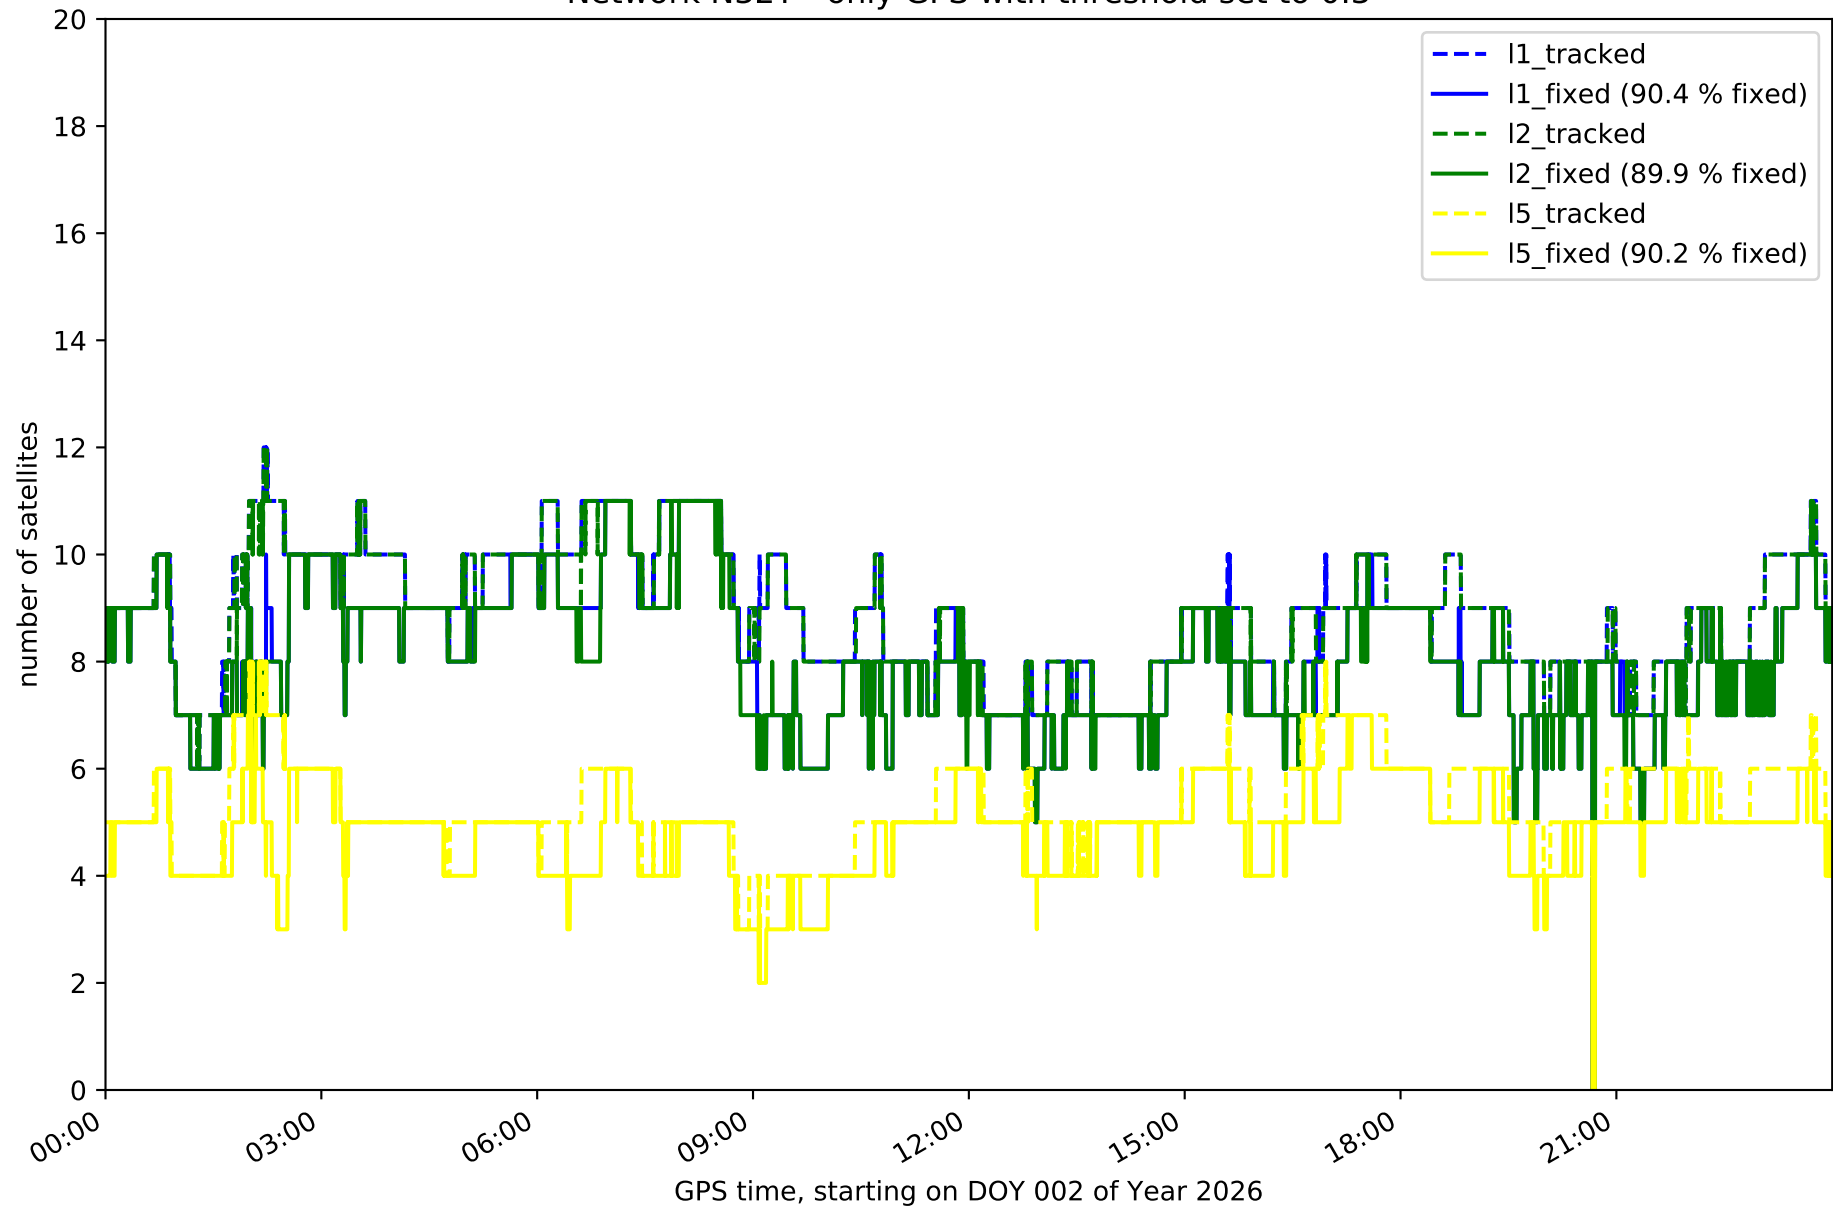


Network N32T - only GLONASS with threshold set to 0.3

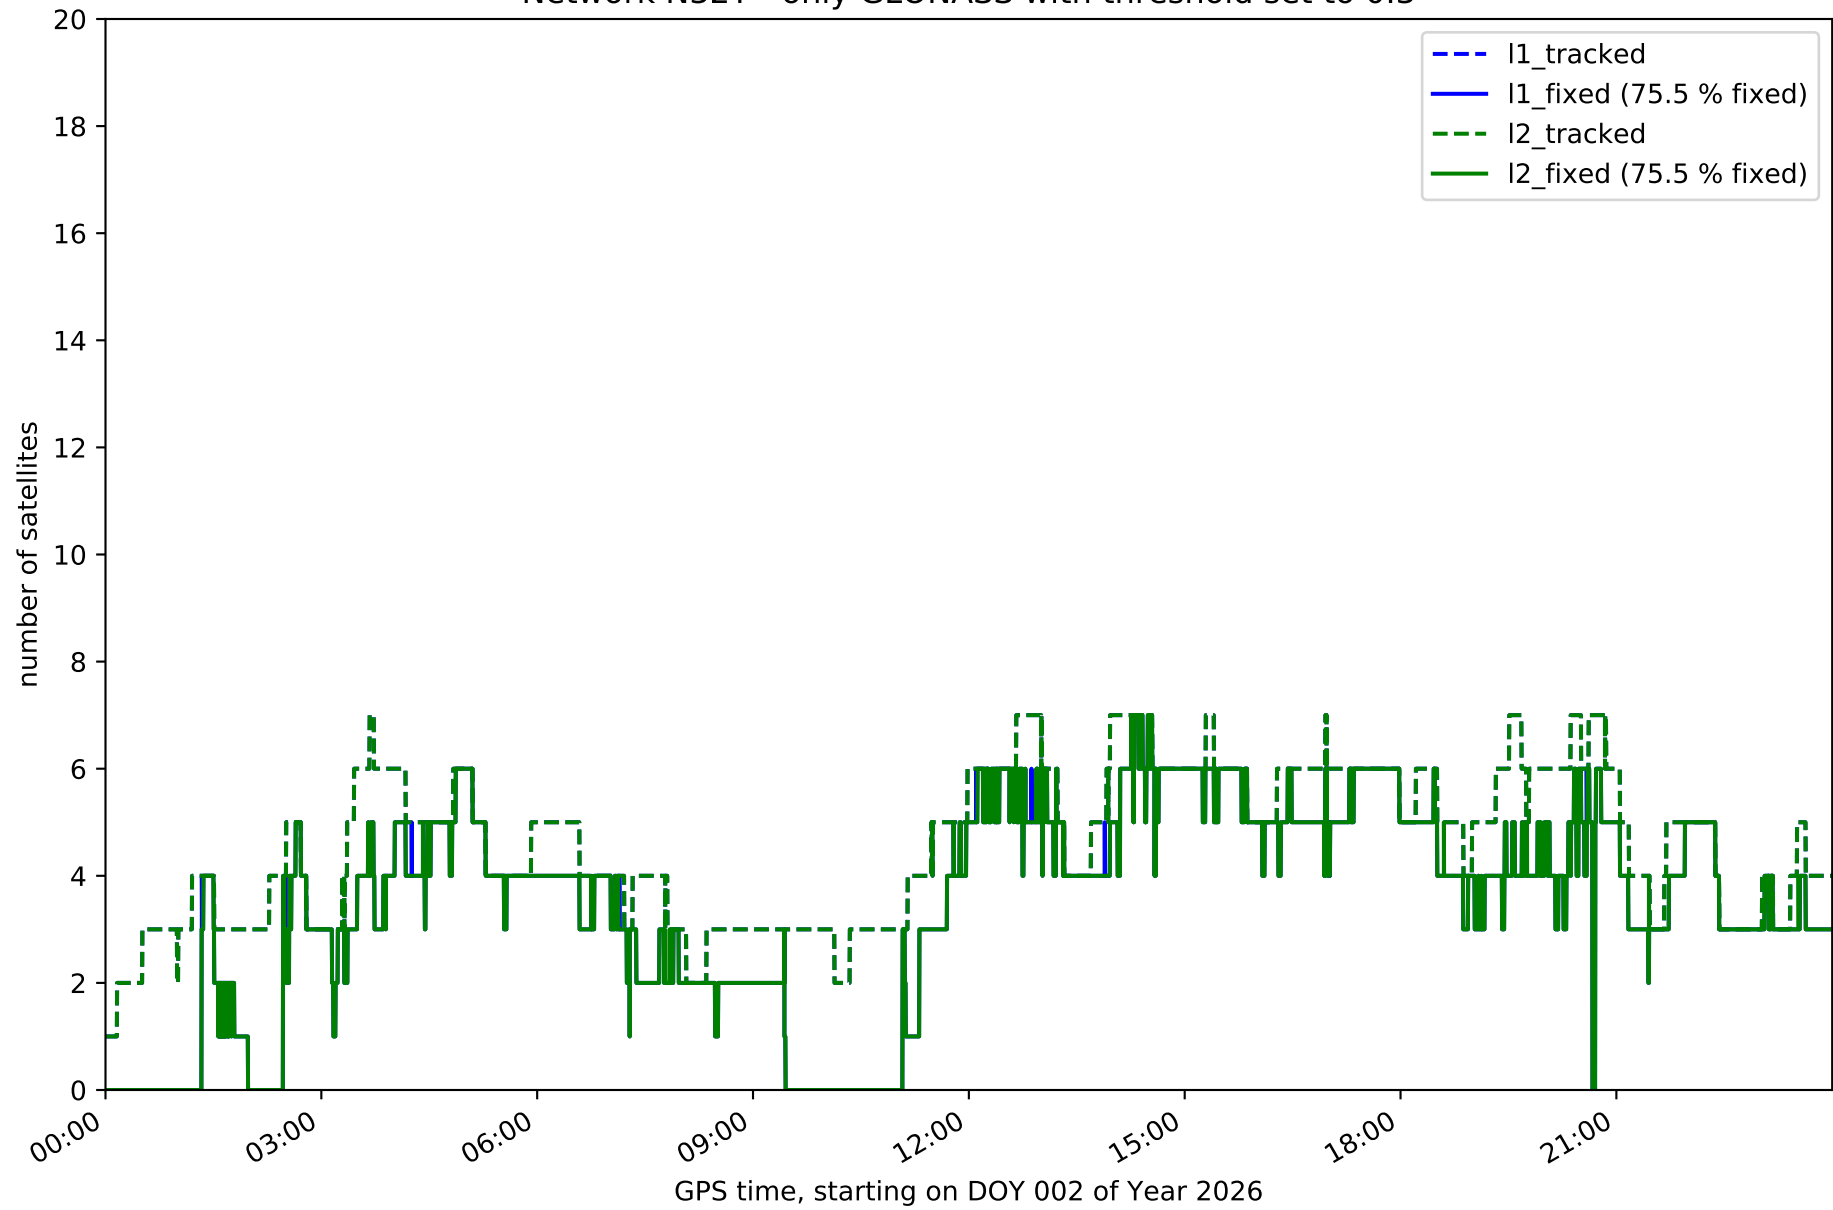


Network N32T - only BDS with threshold set to 0.3

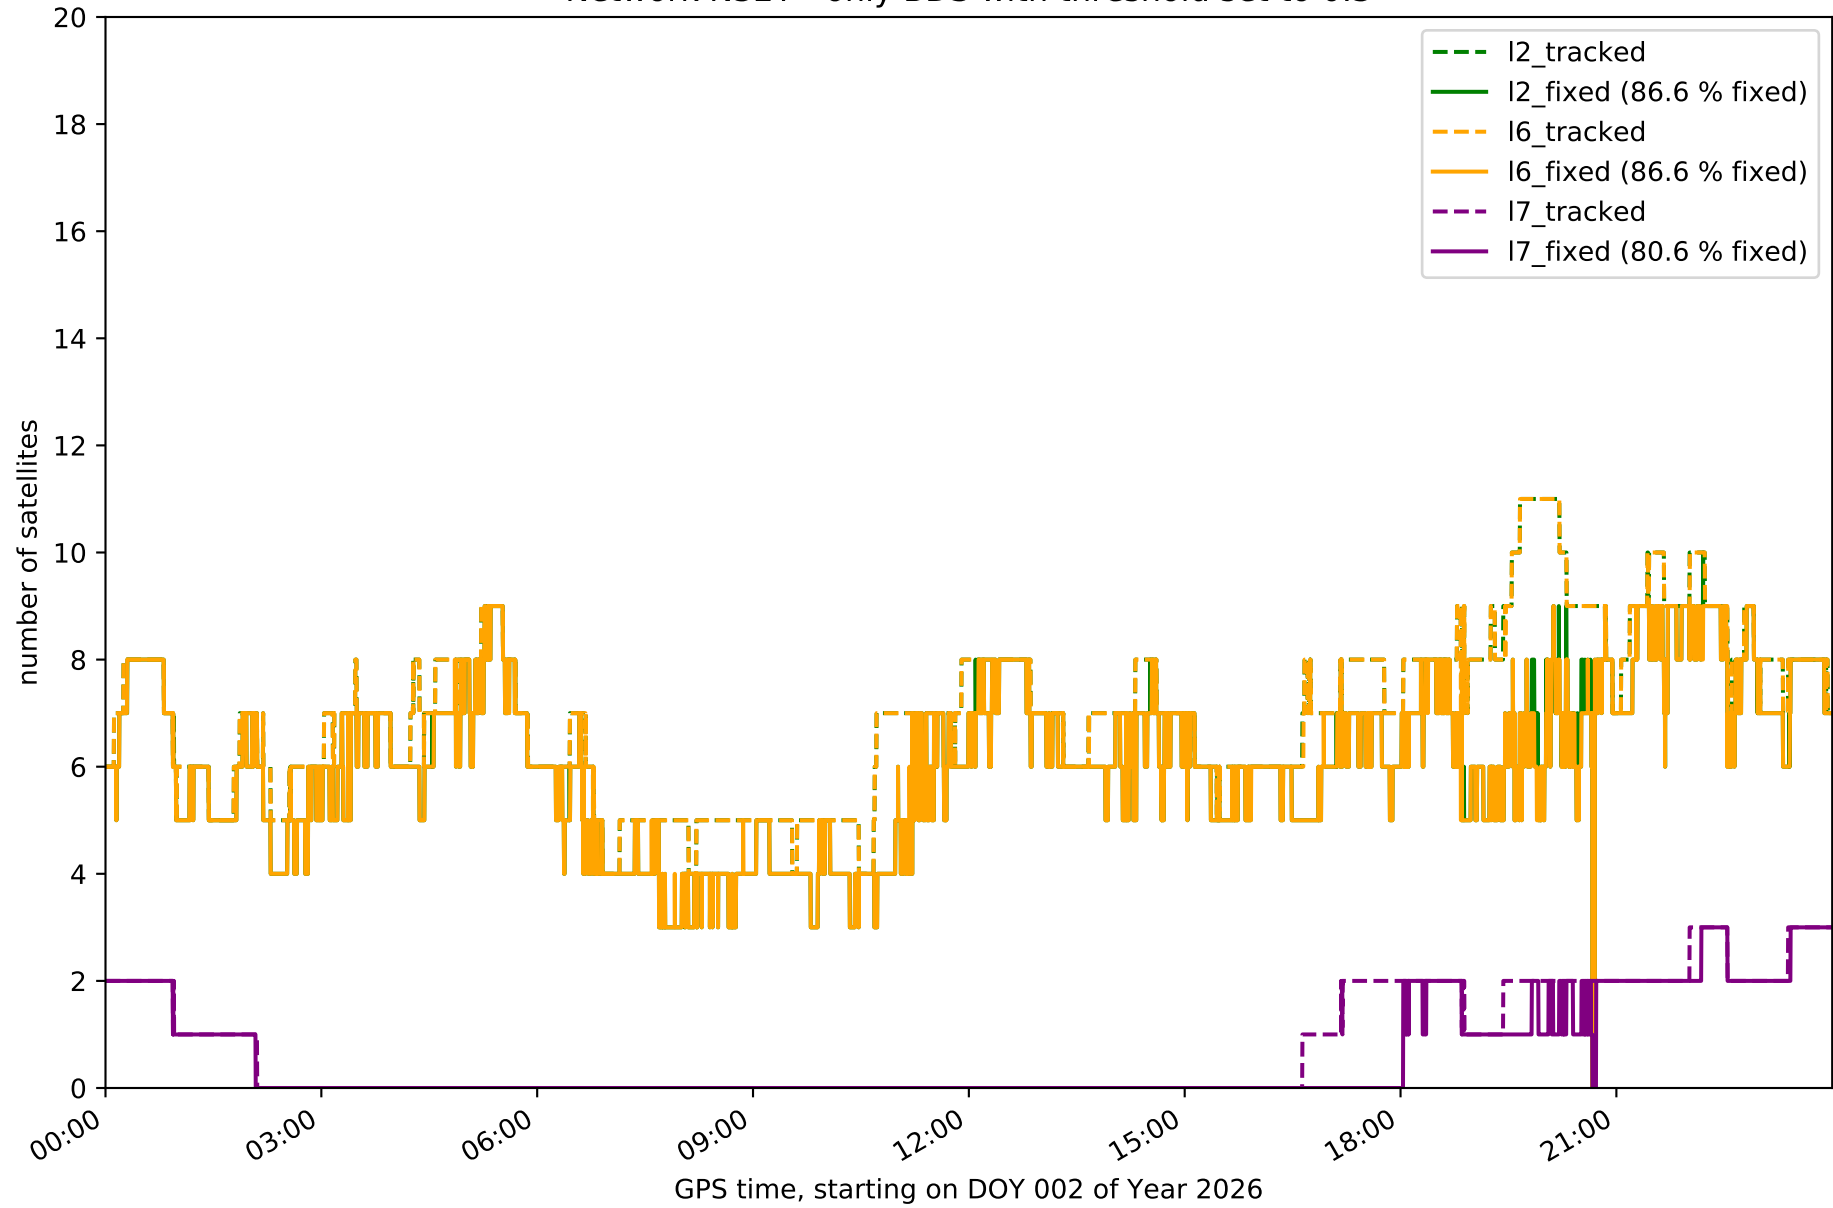


Network N32T - only Galileo with threshold set to 0.3

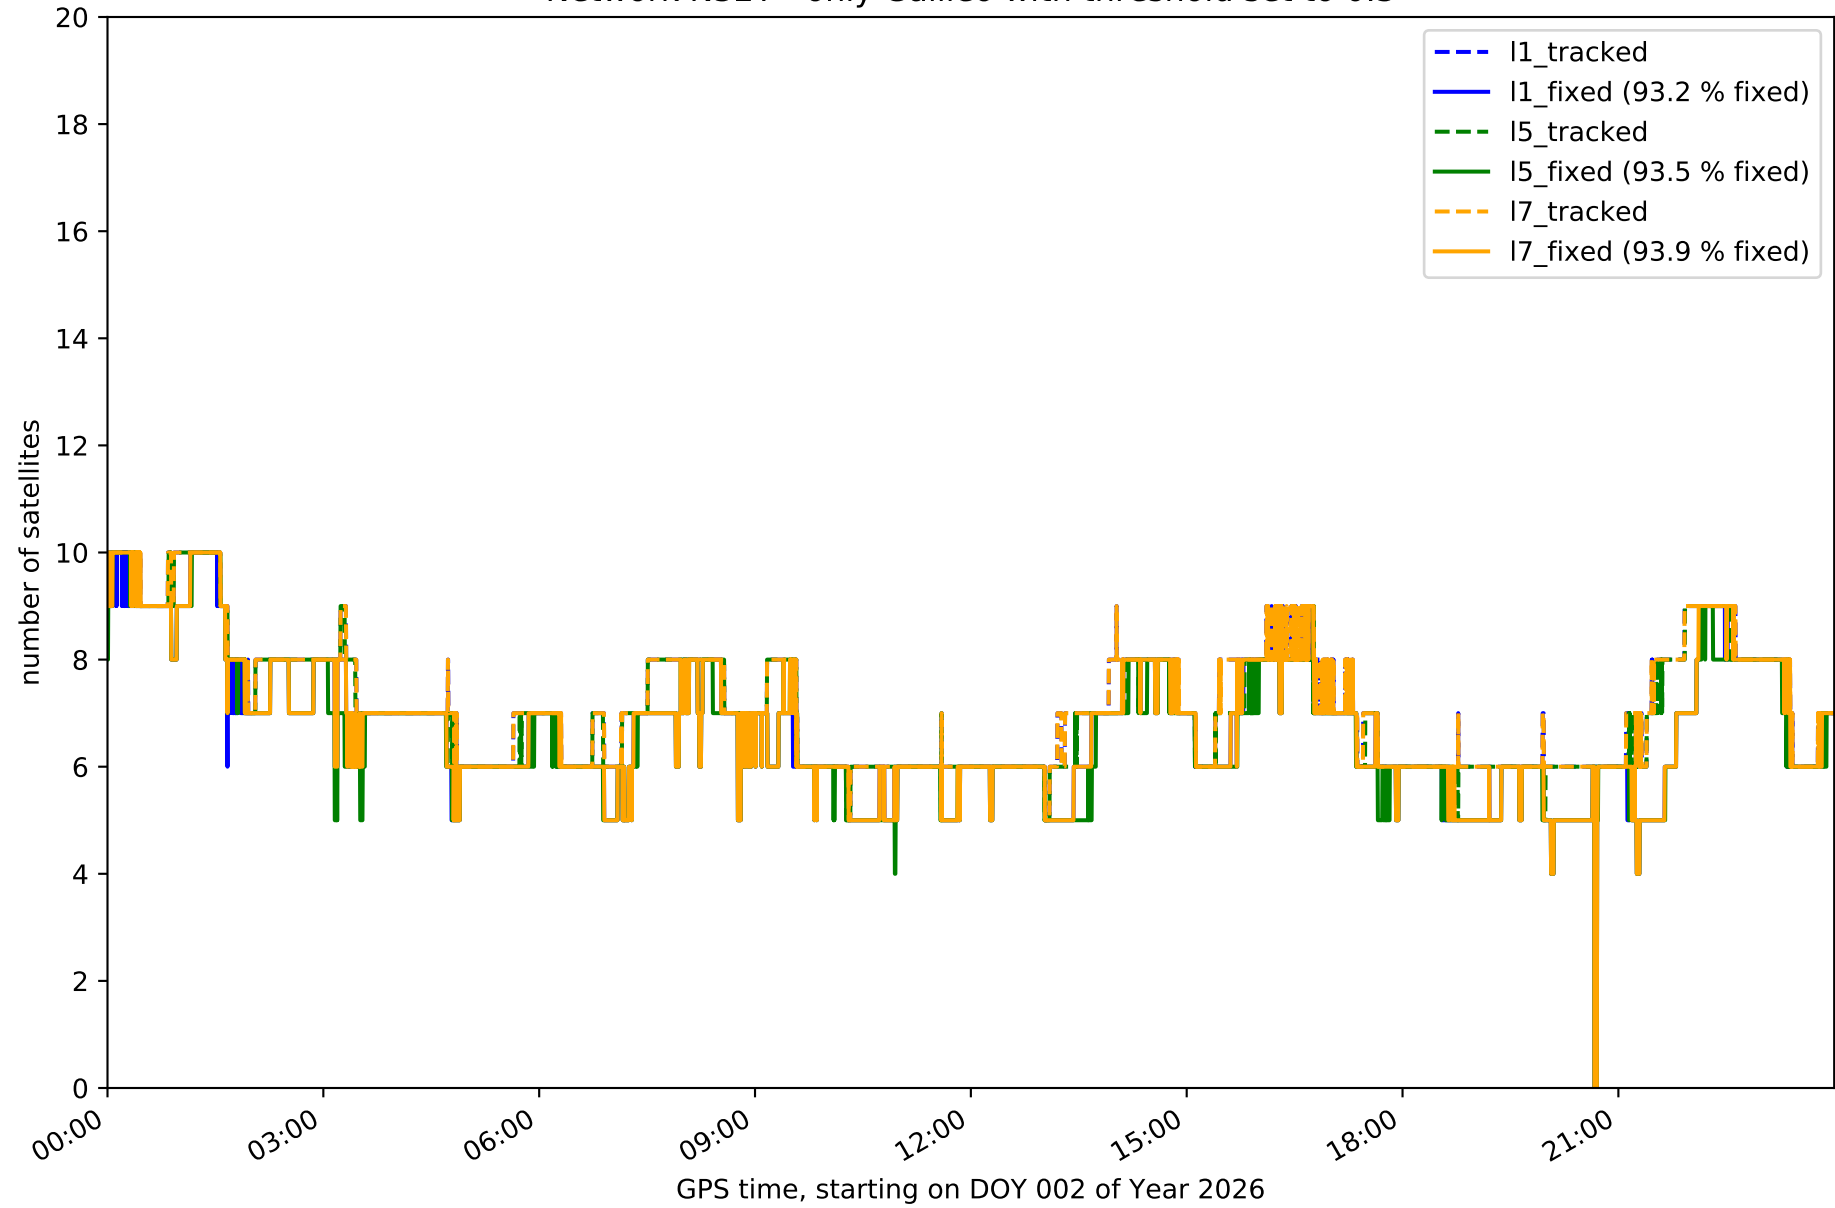


Station EH01 in network N32T

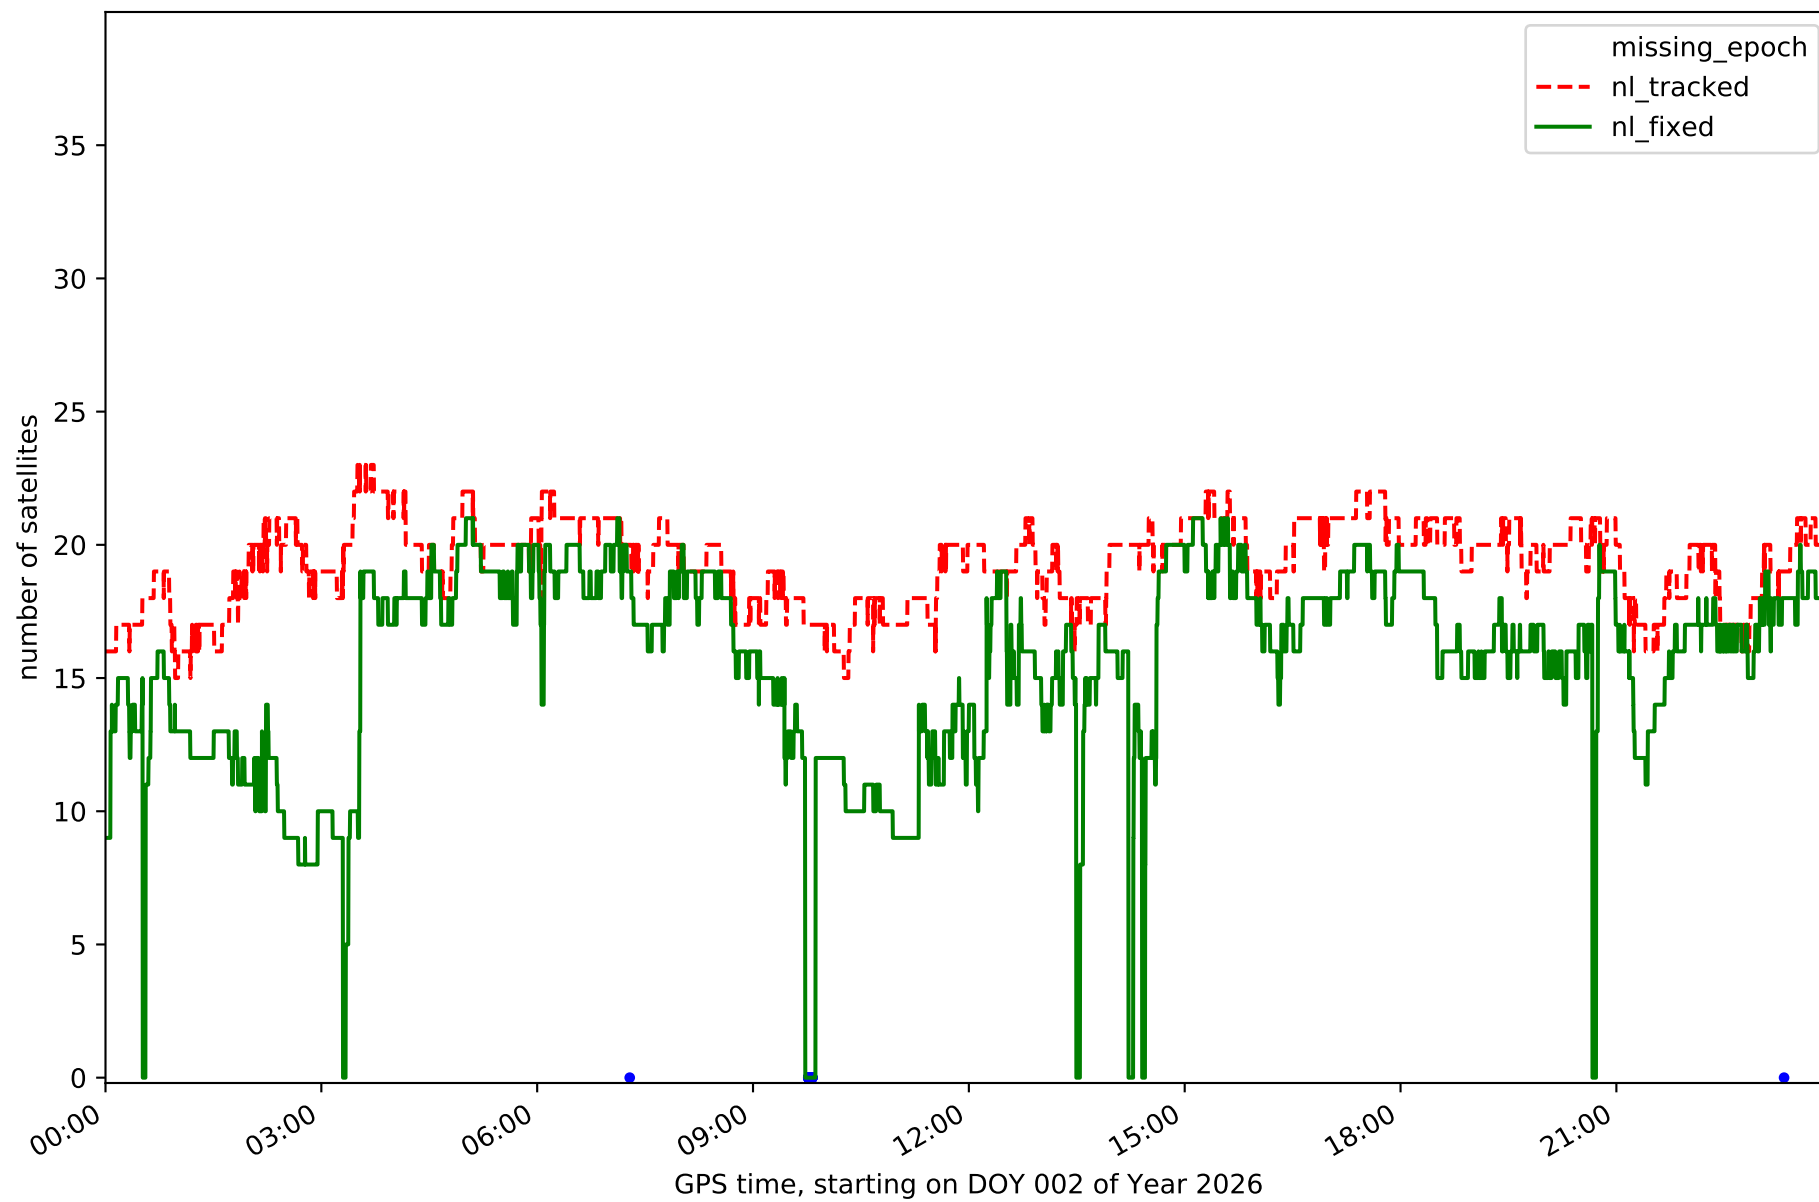


Station EH02 in network N32T

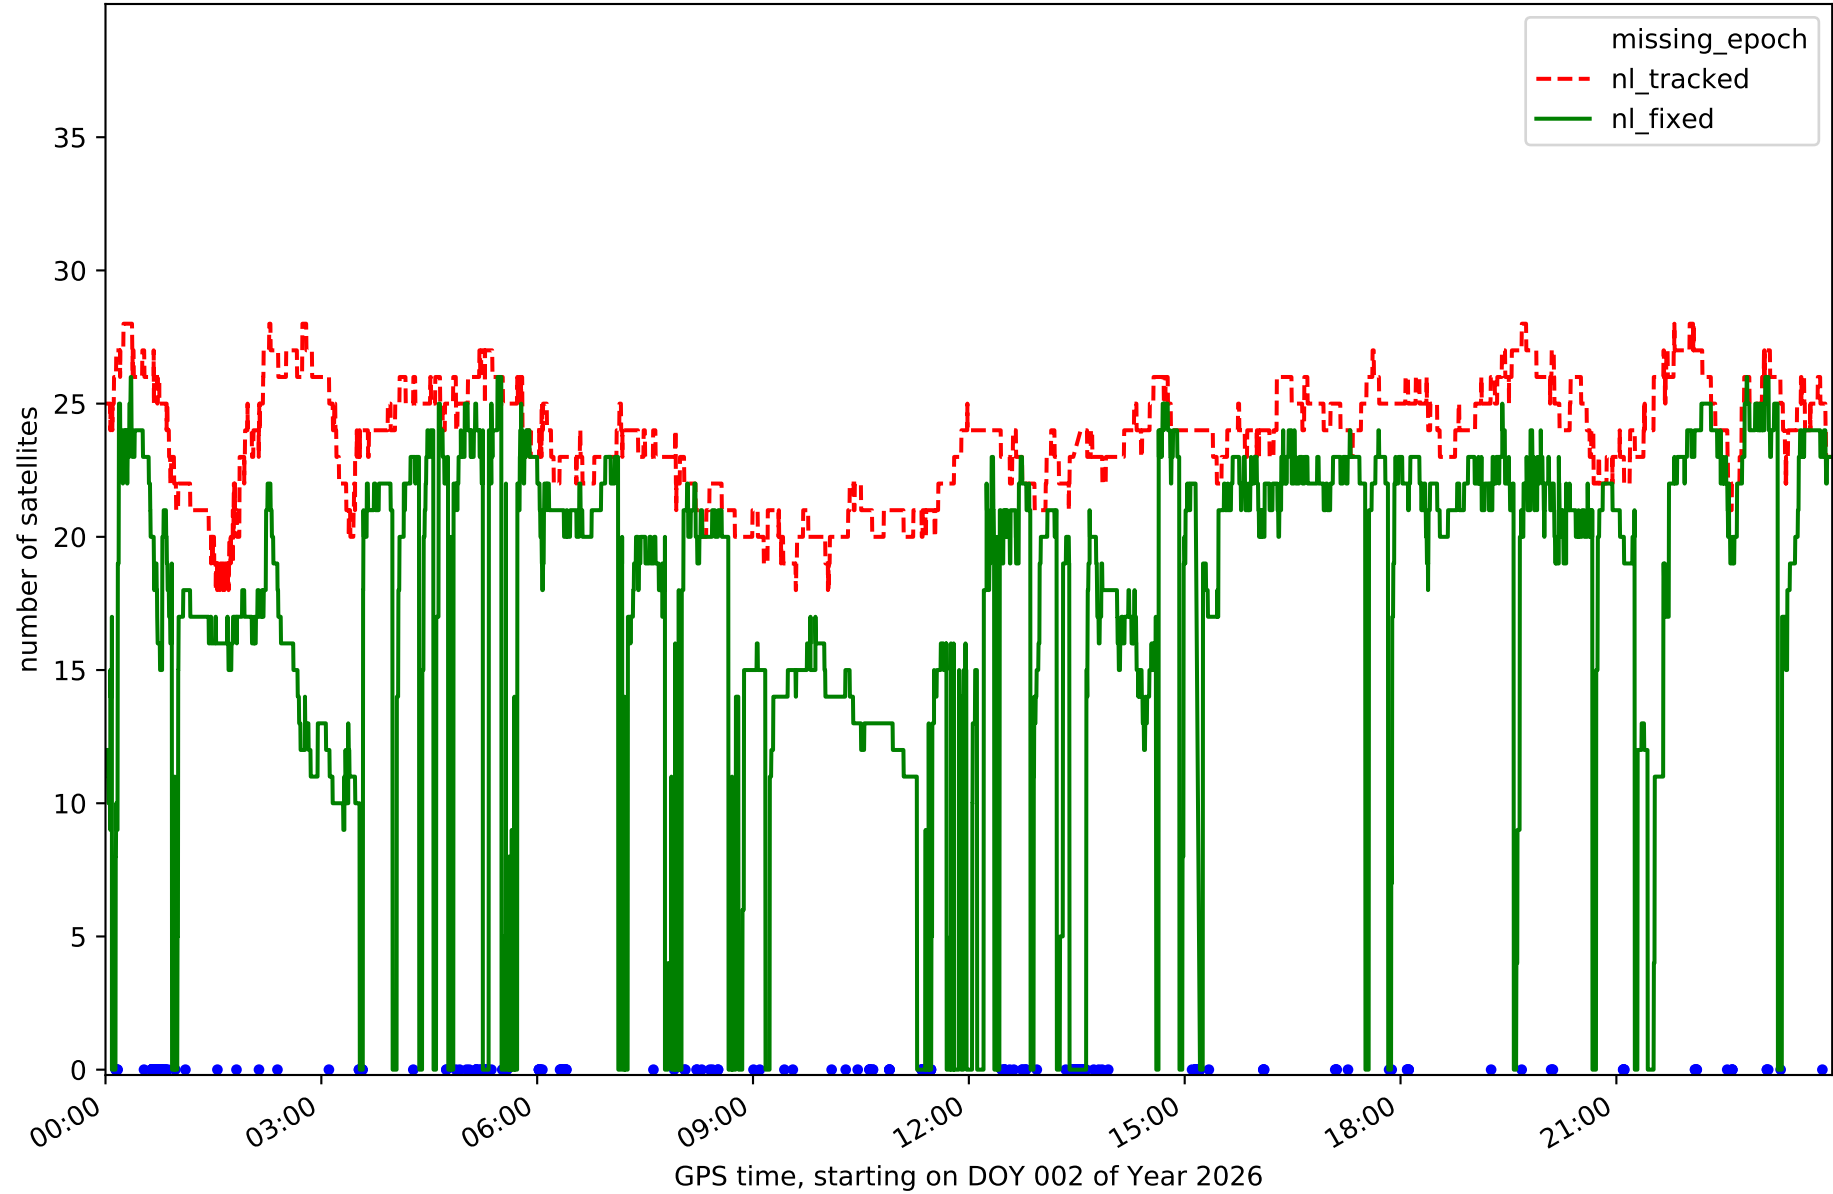


Station GOM1 in network N32T

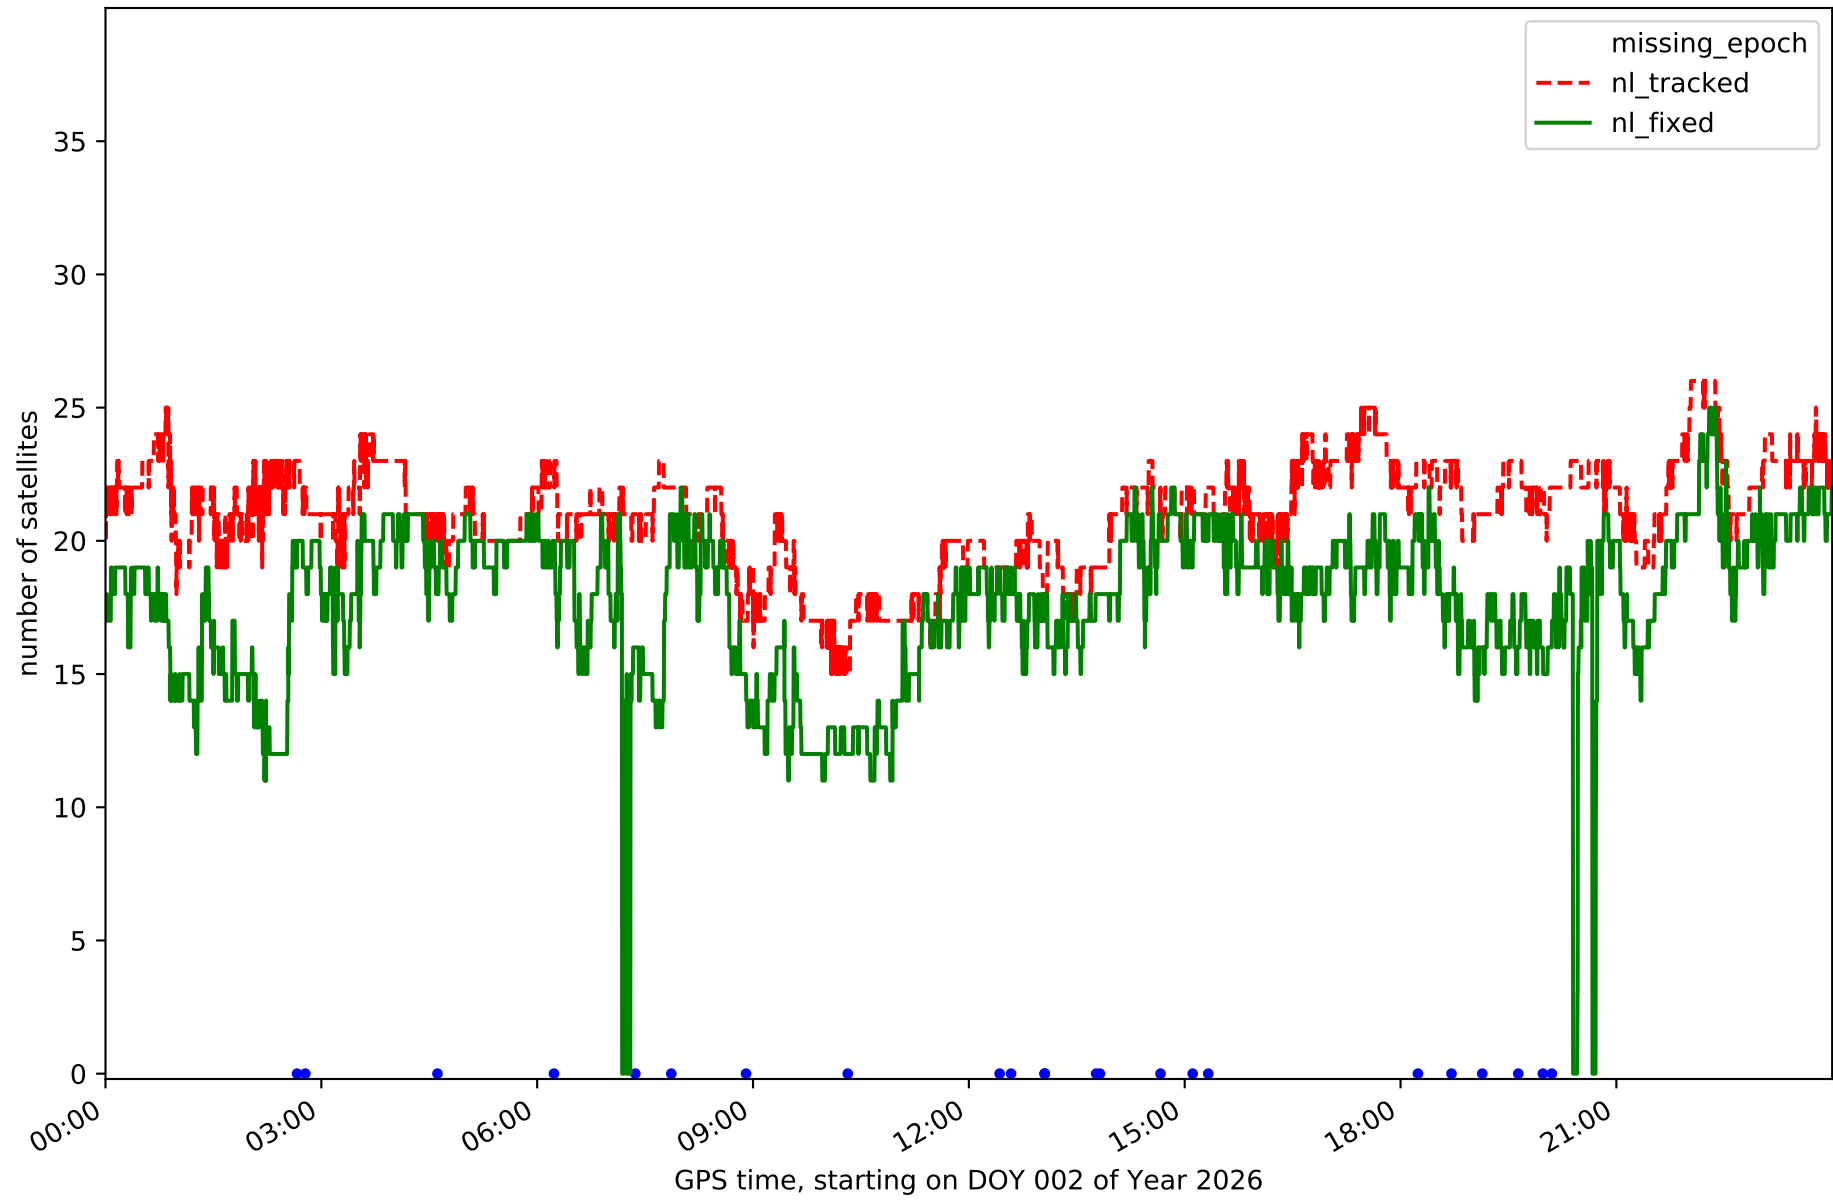


Station GOME in network N32T

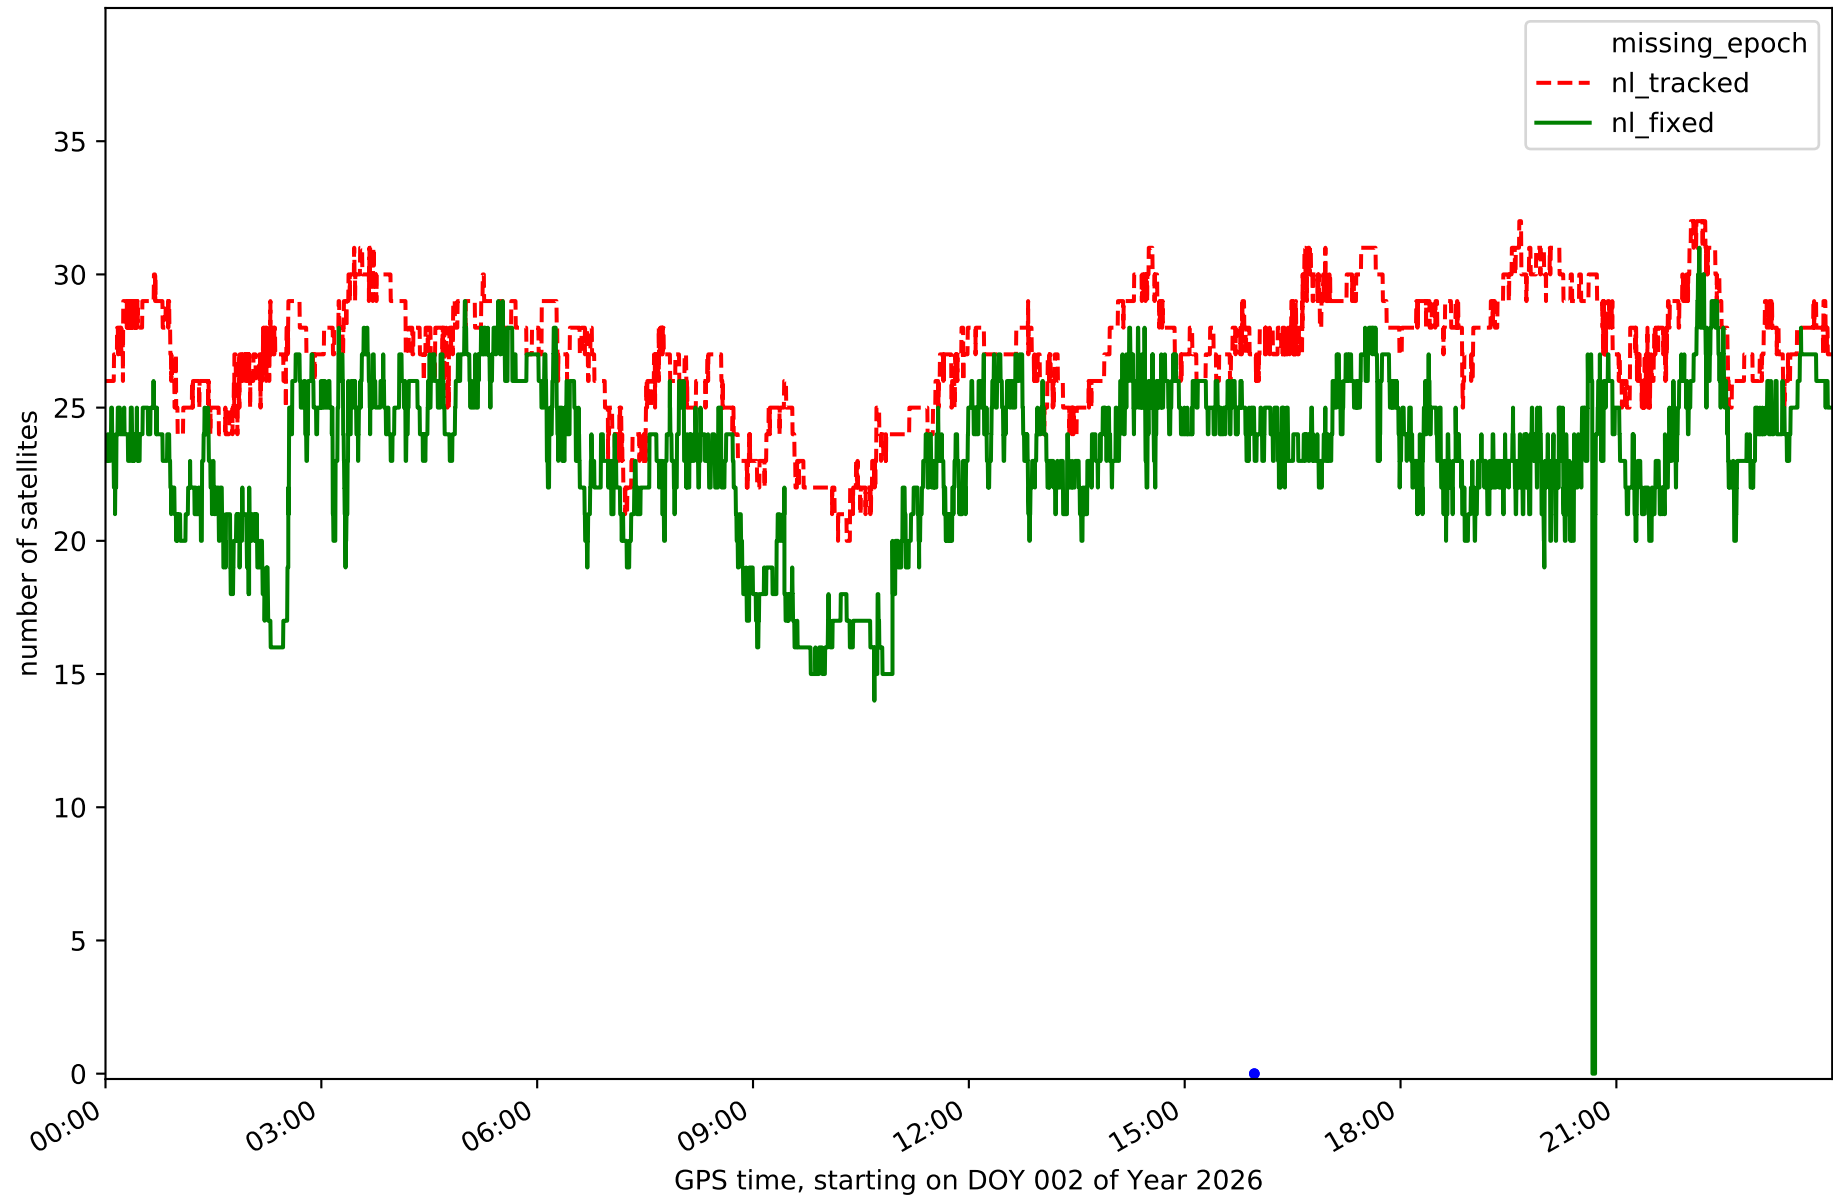


Station IZAN in network N32T

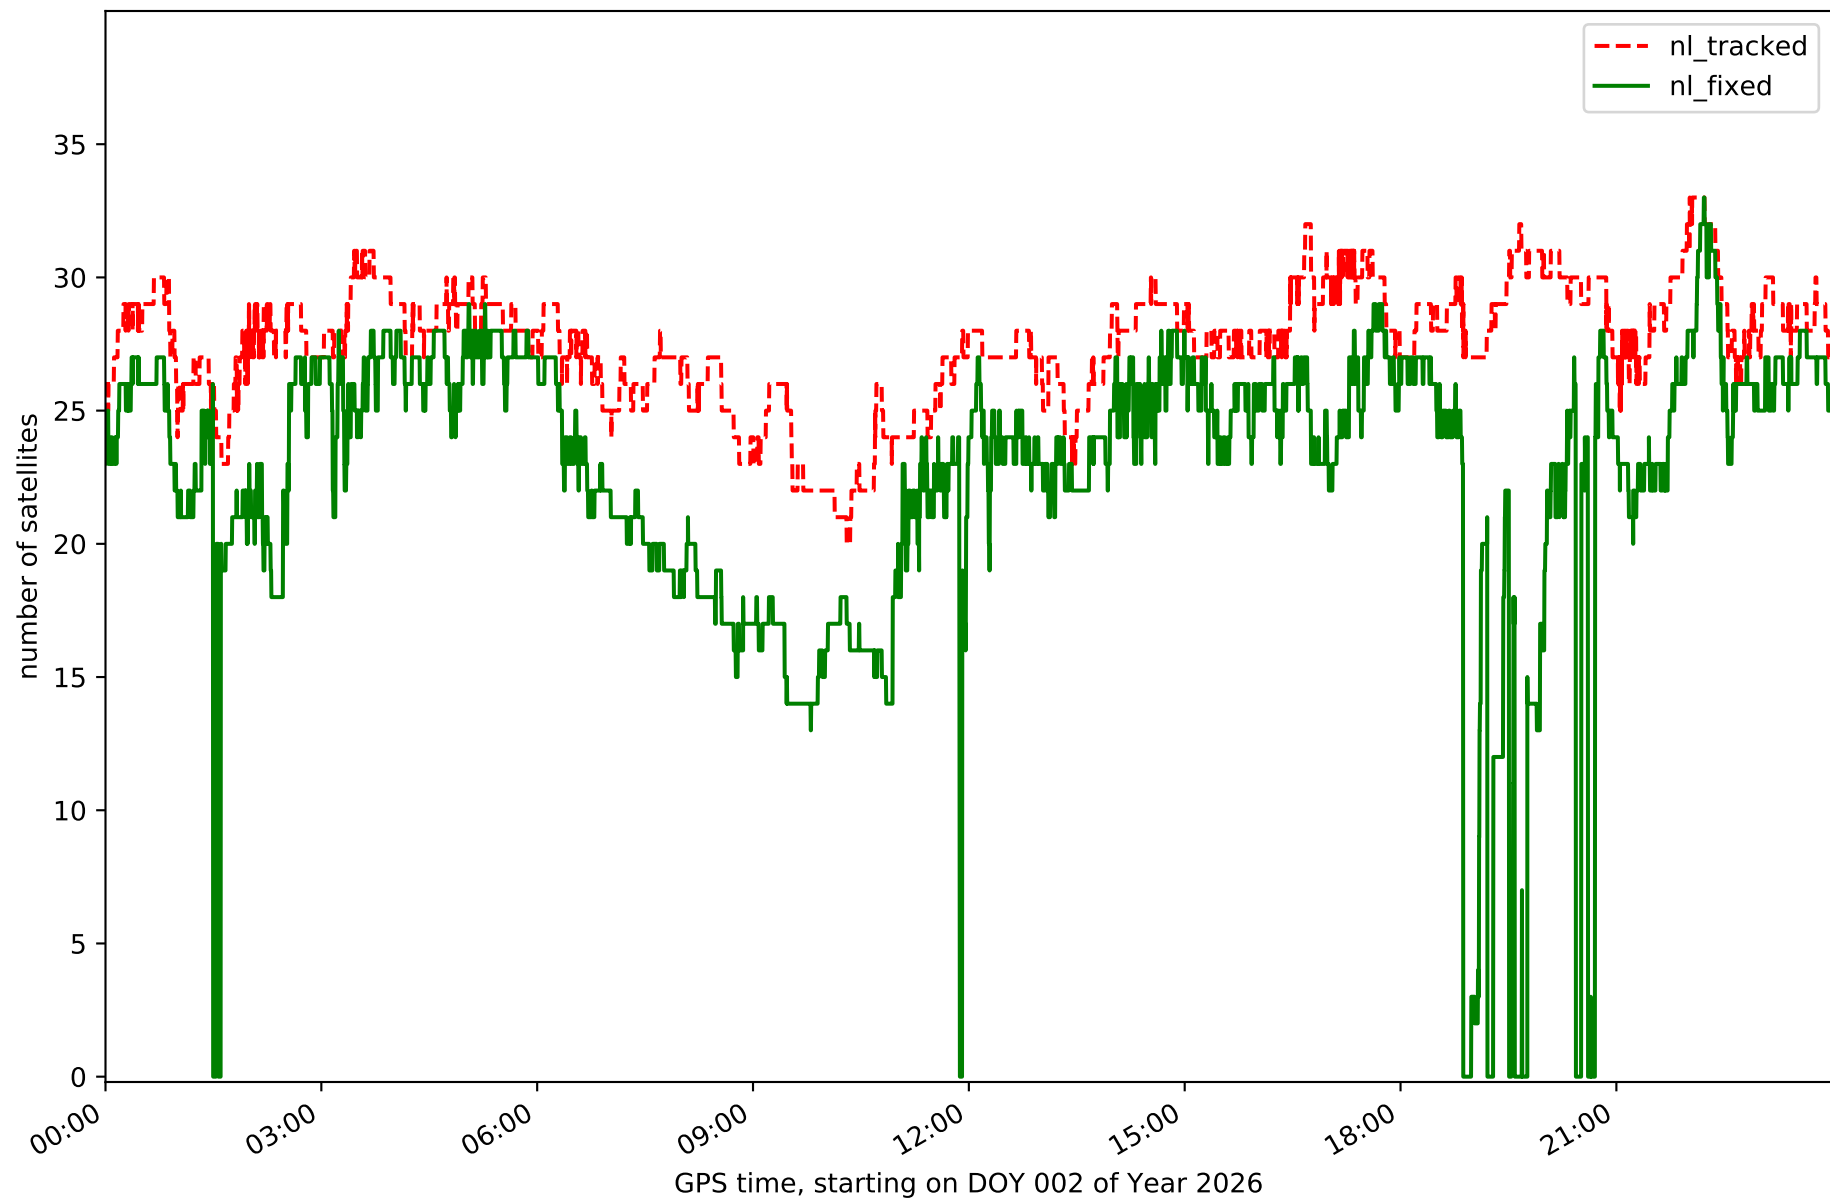


Station LP01 in network N32T

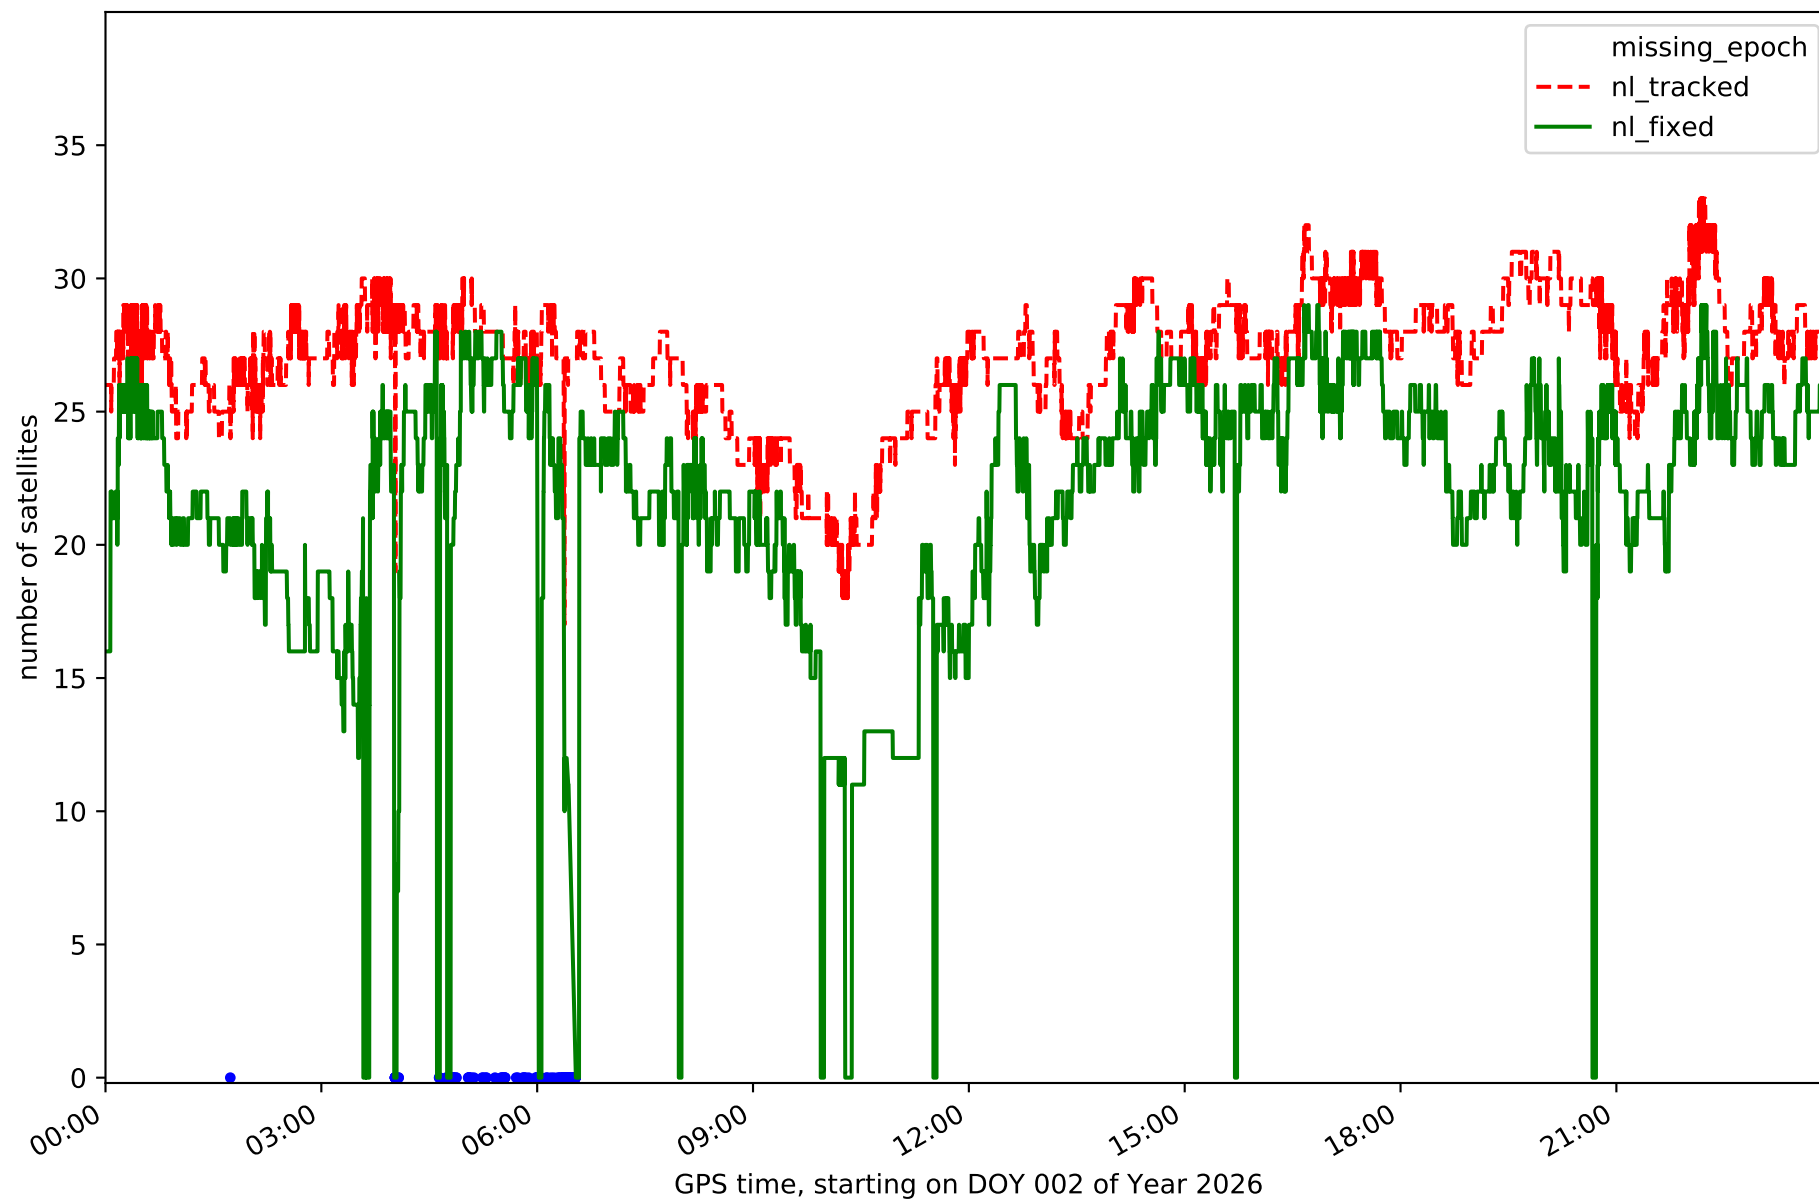


Station LP03 in network N32T

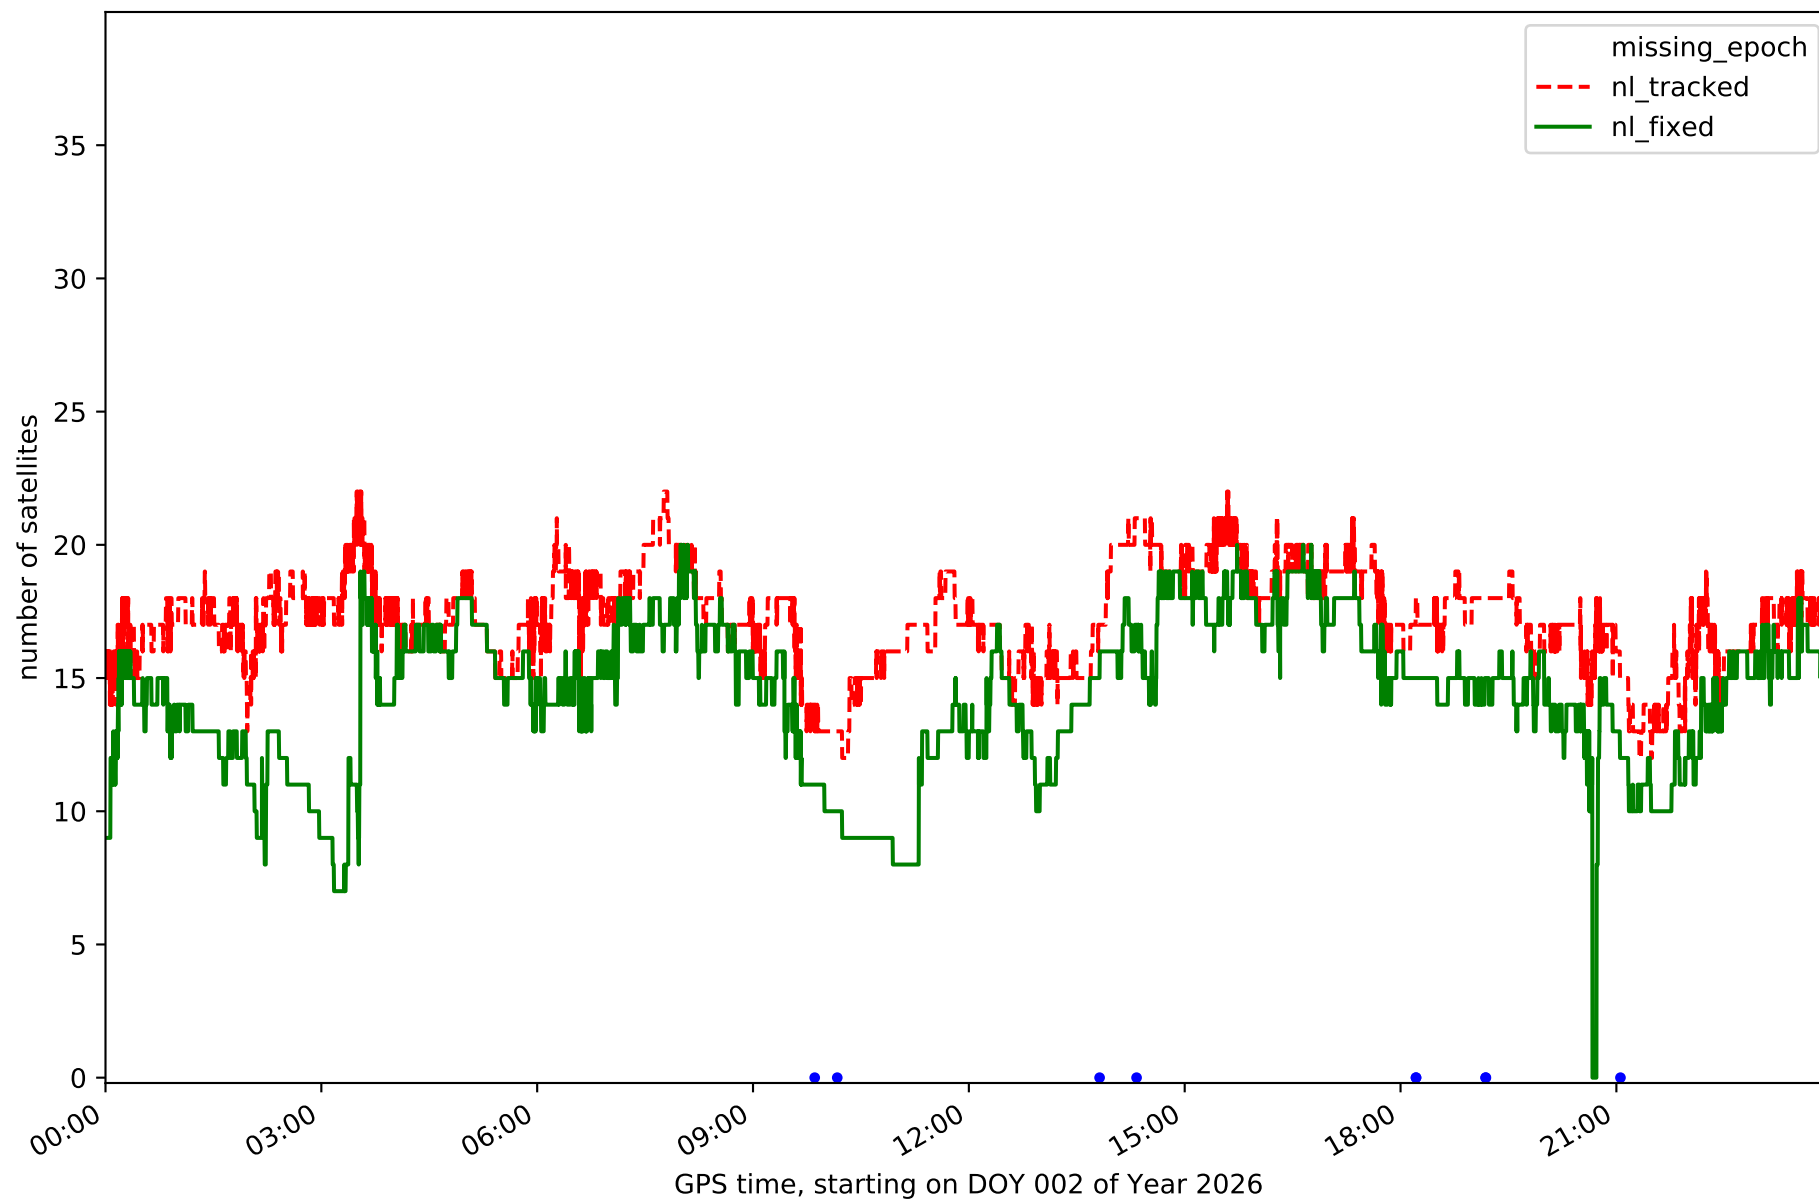


Station LPAL in network N32T

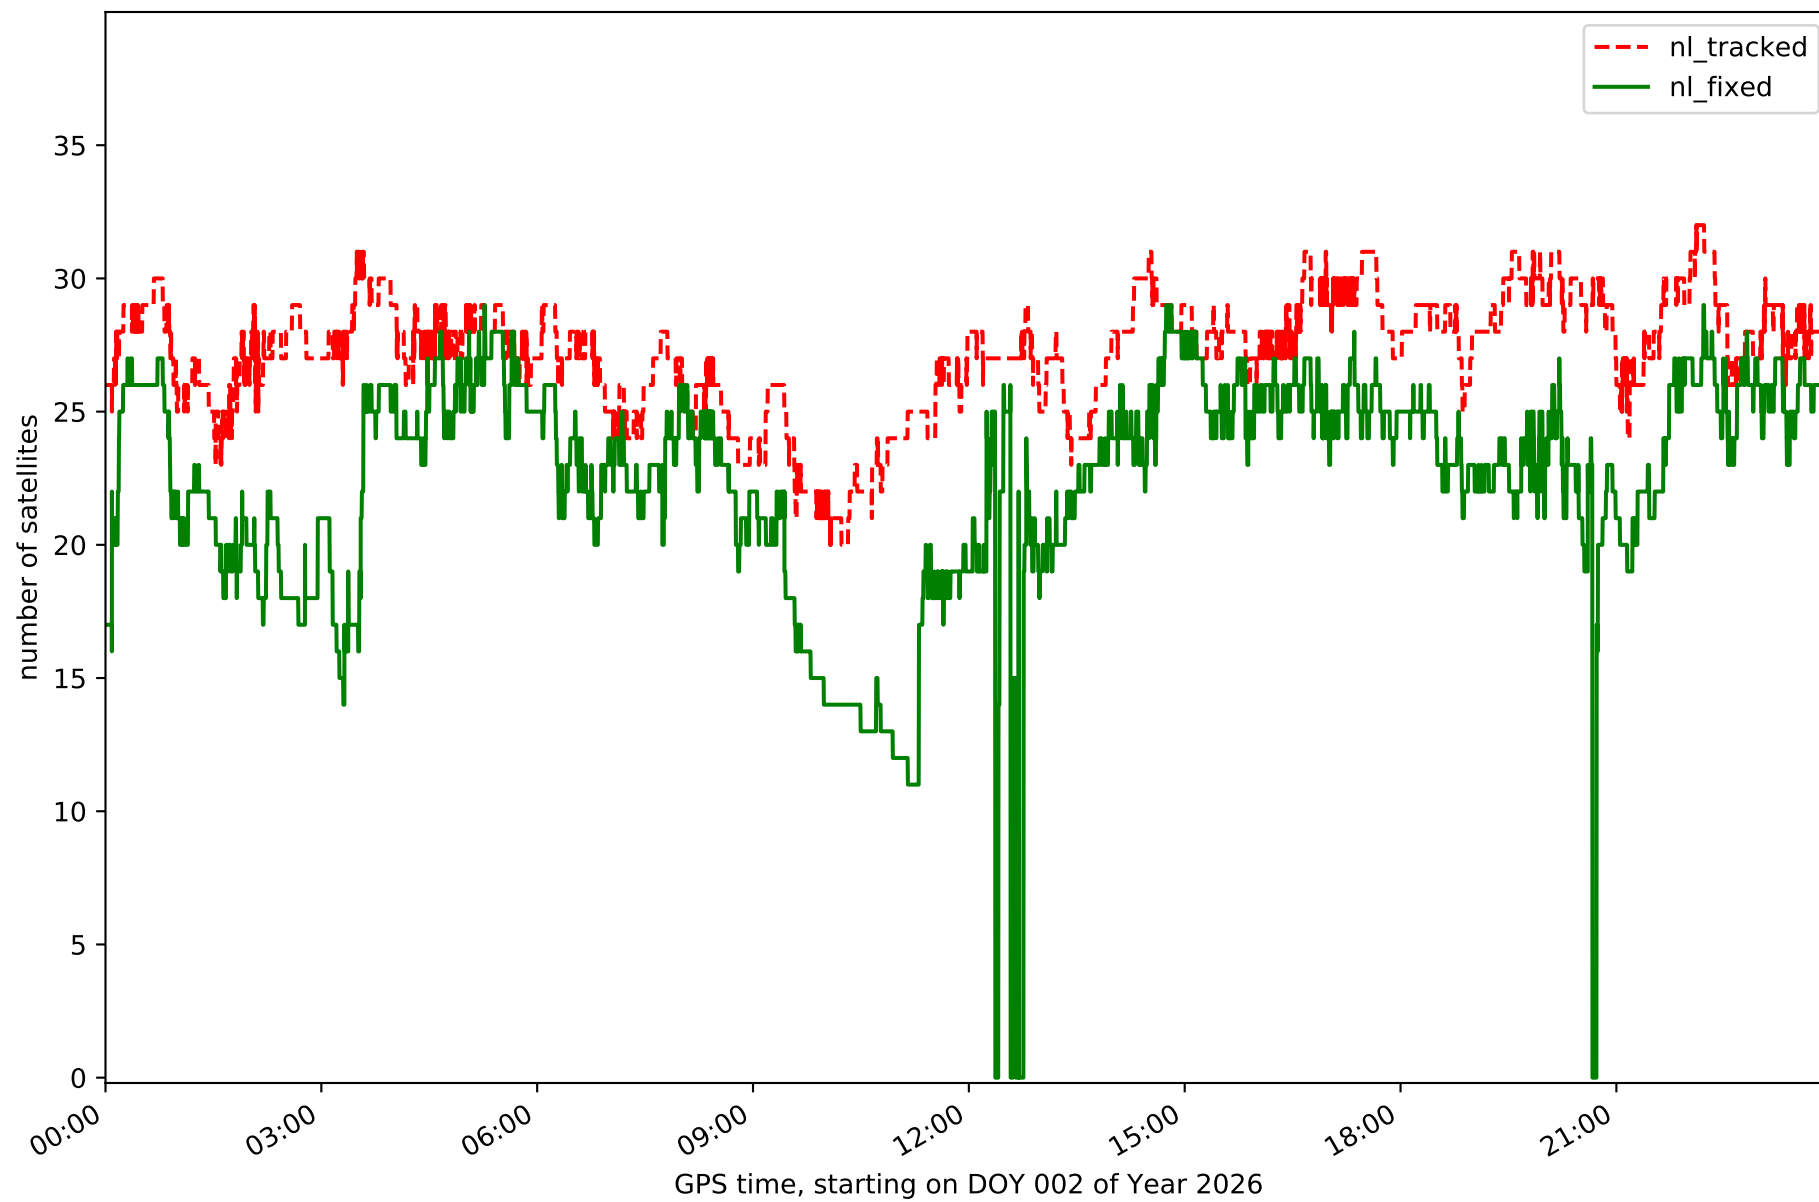


Station LRES in network N32T

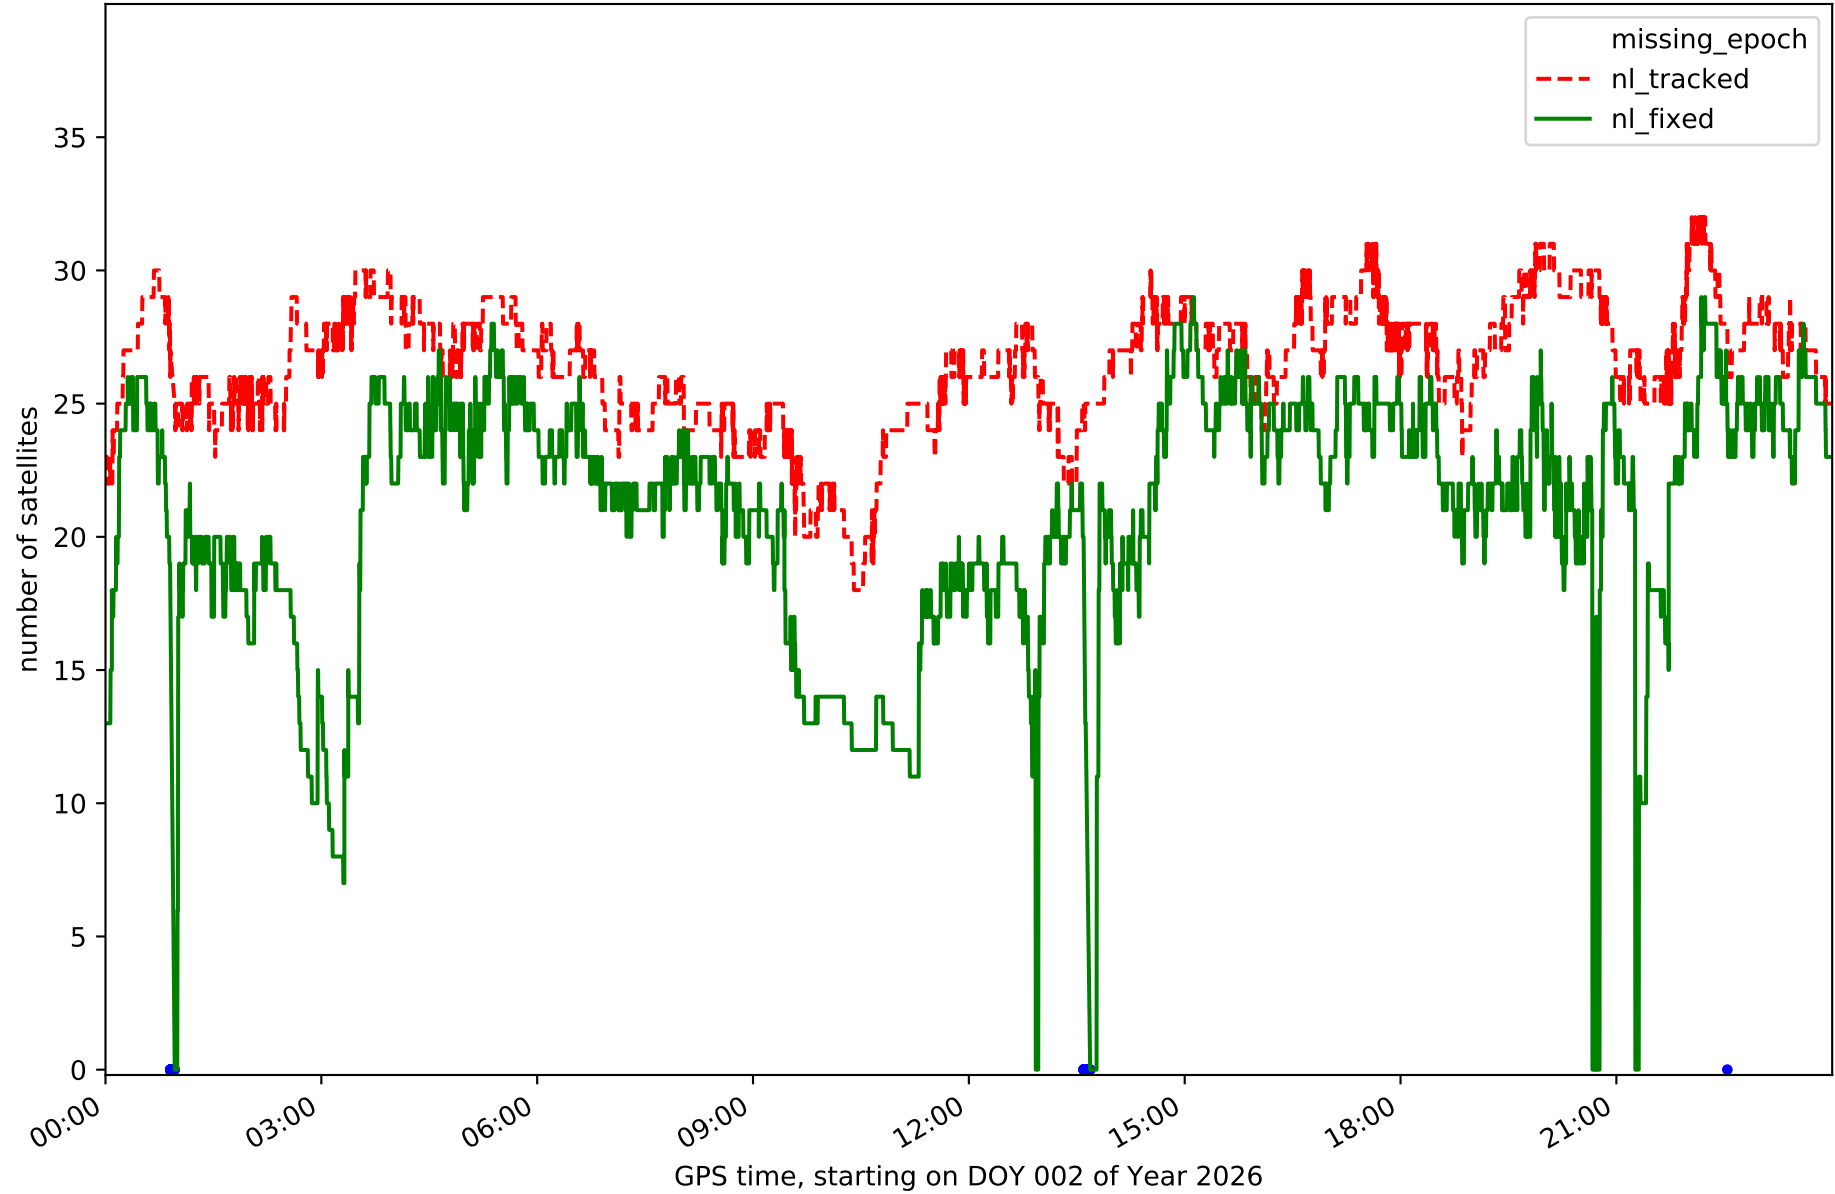


Station TN01 in network N32T

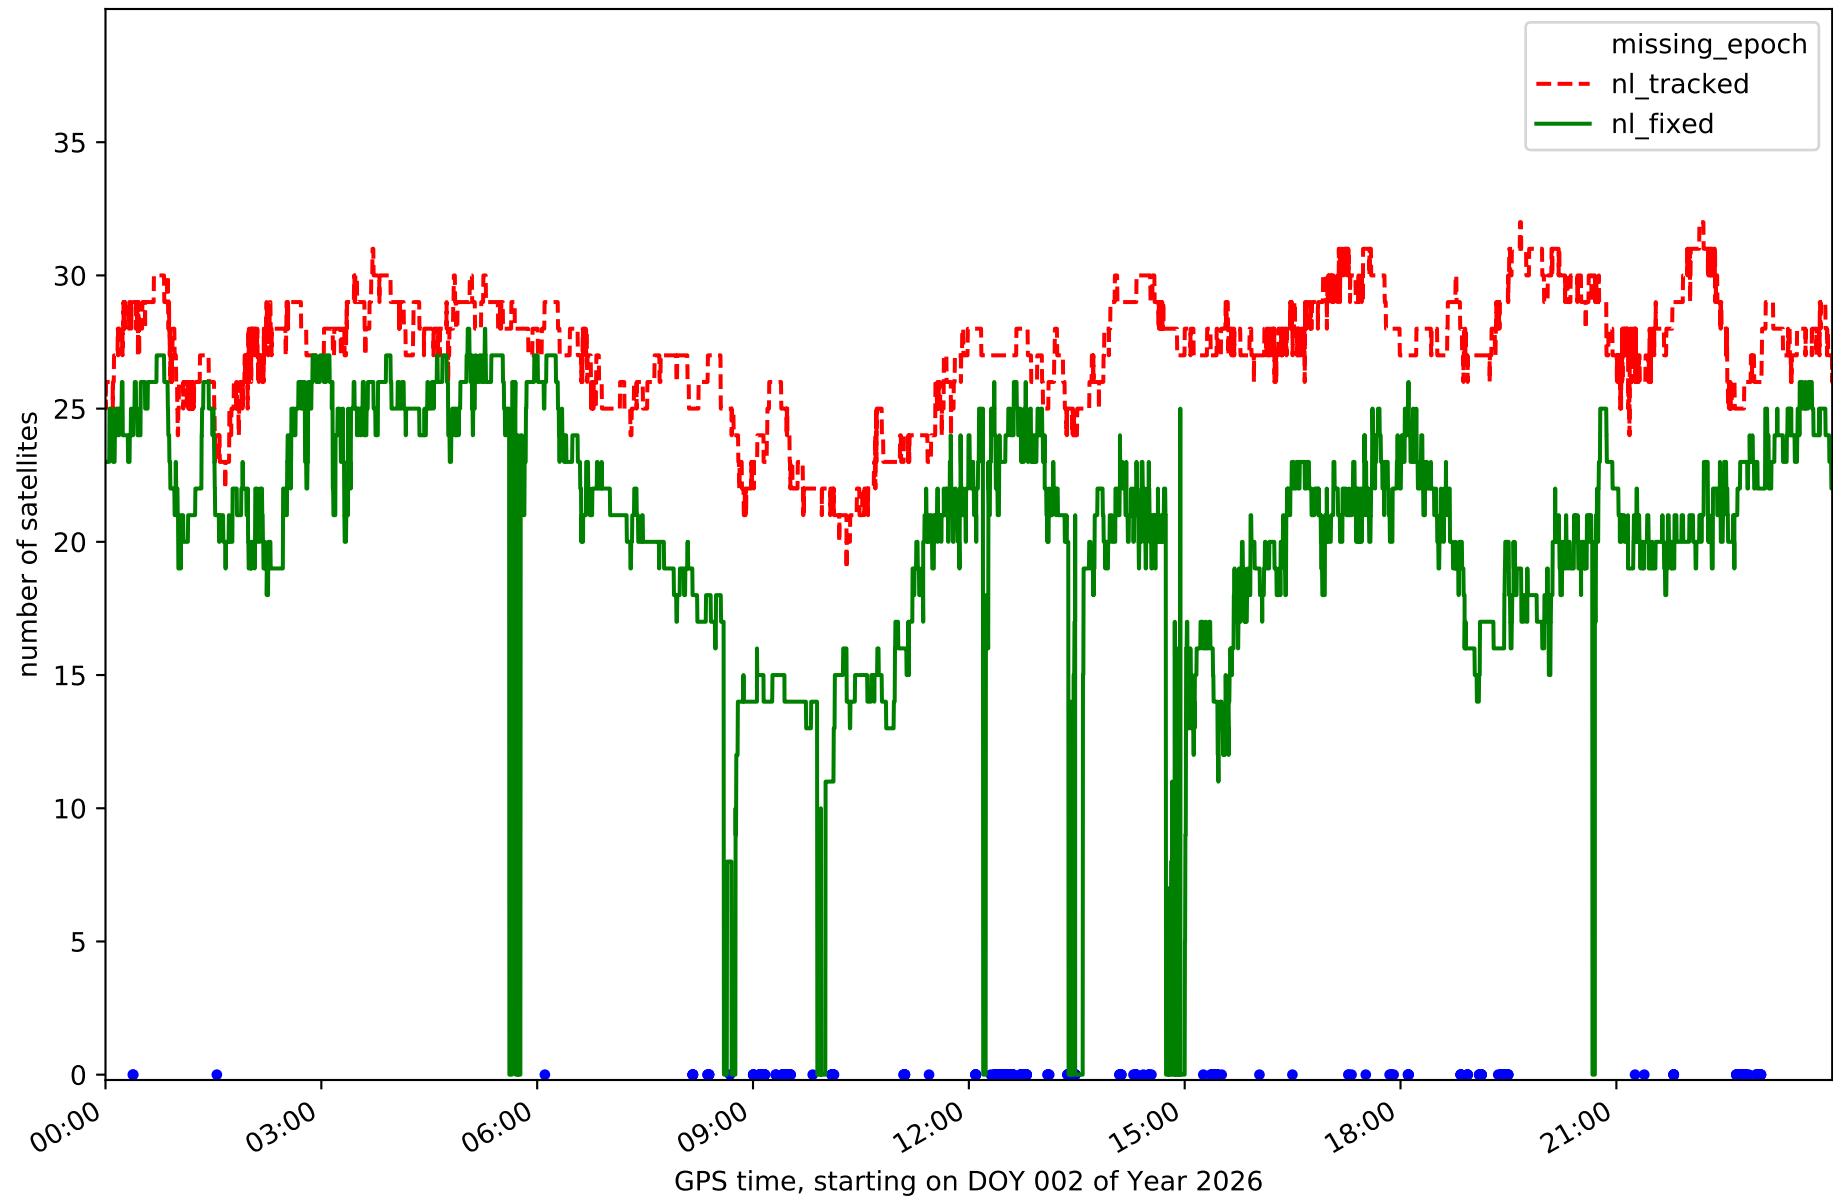


Station TN02 in network N32T

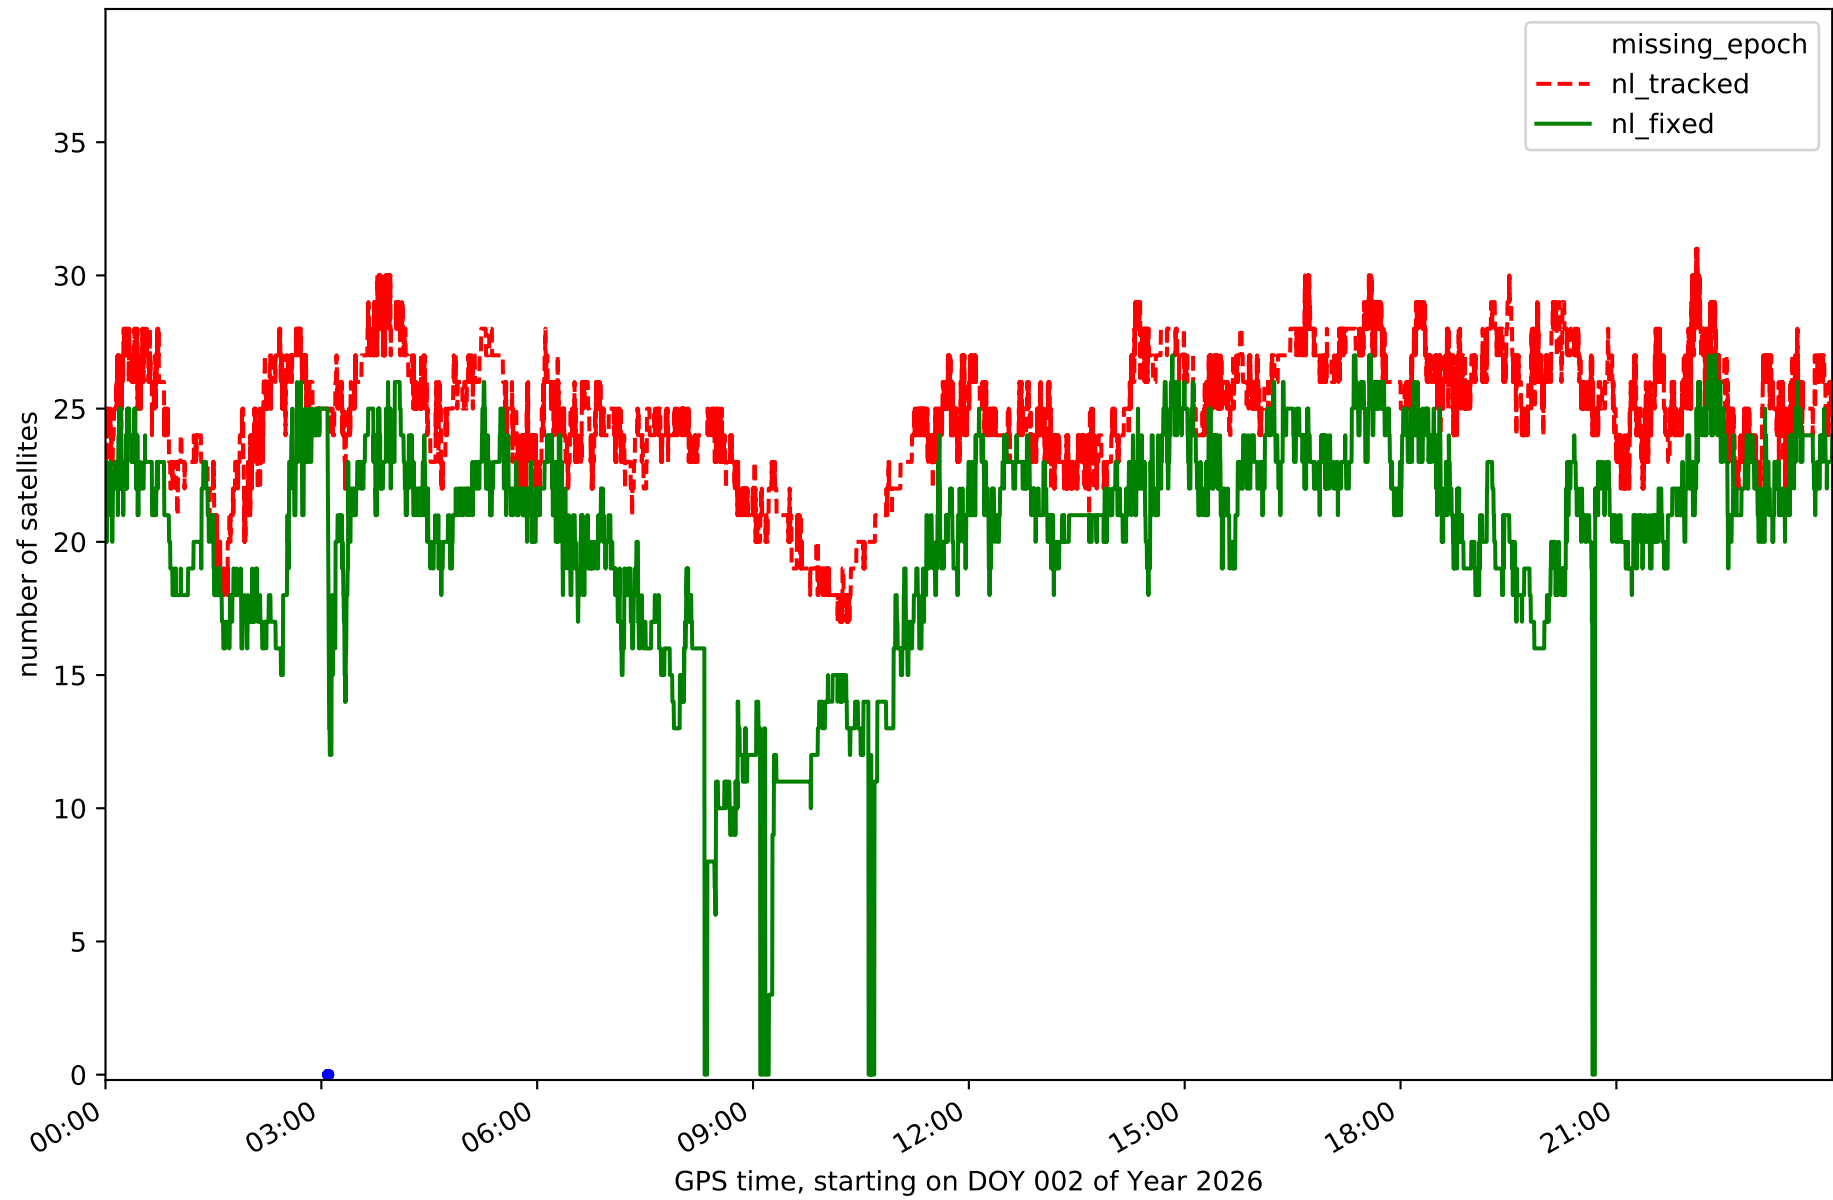


Station TN03 in network N32T

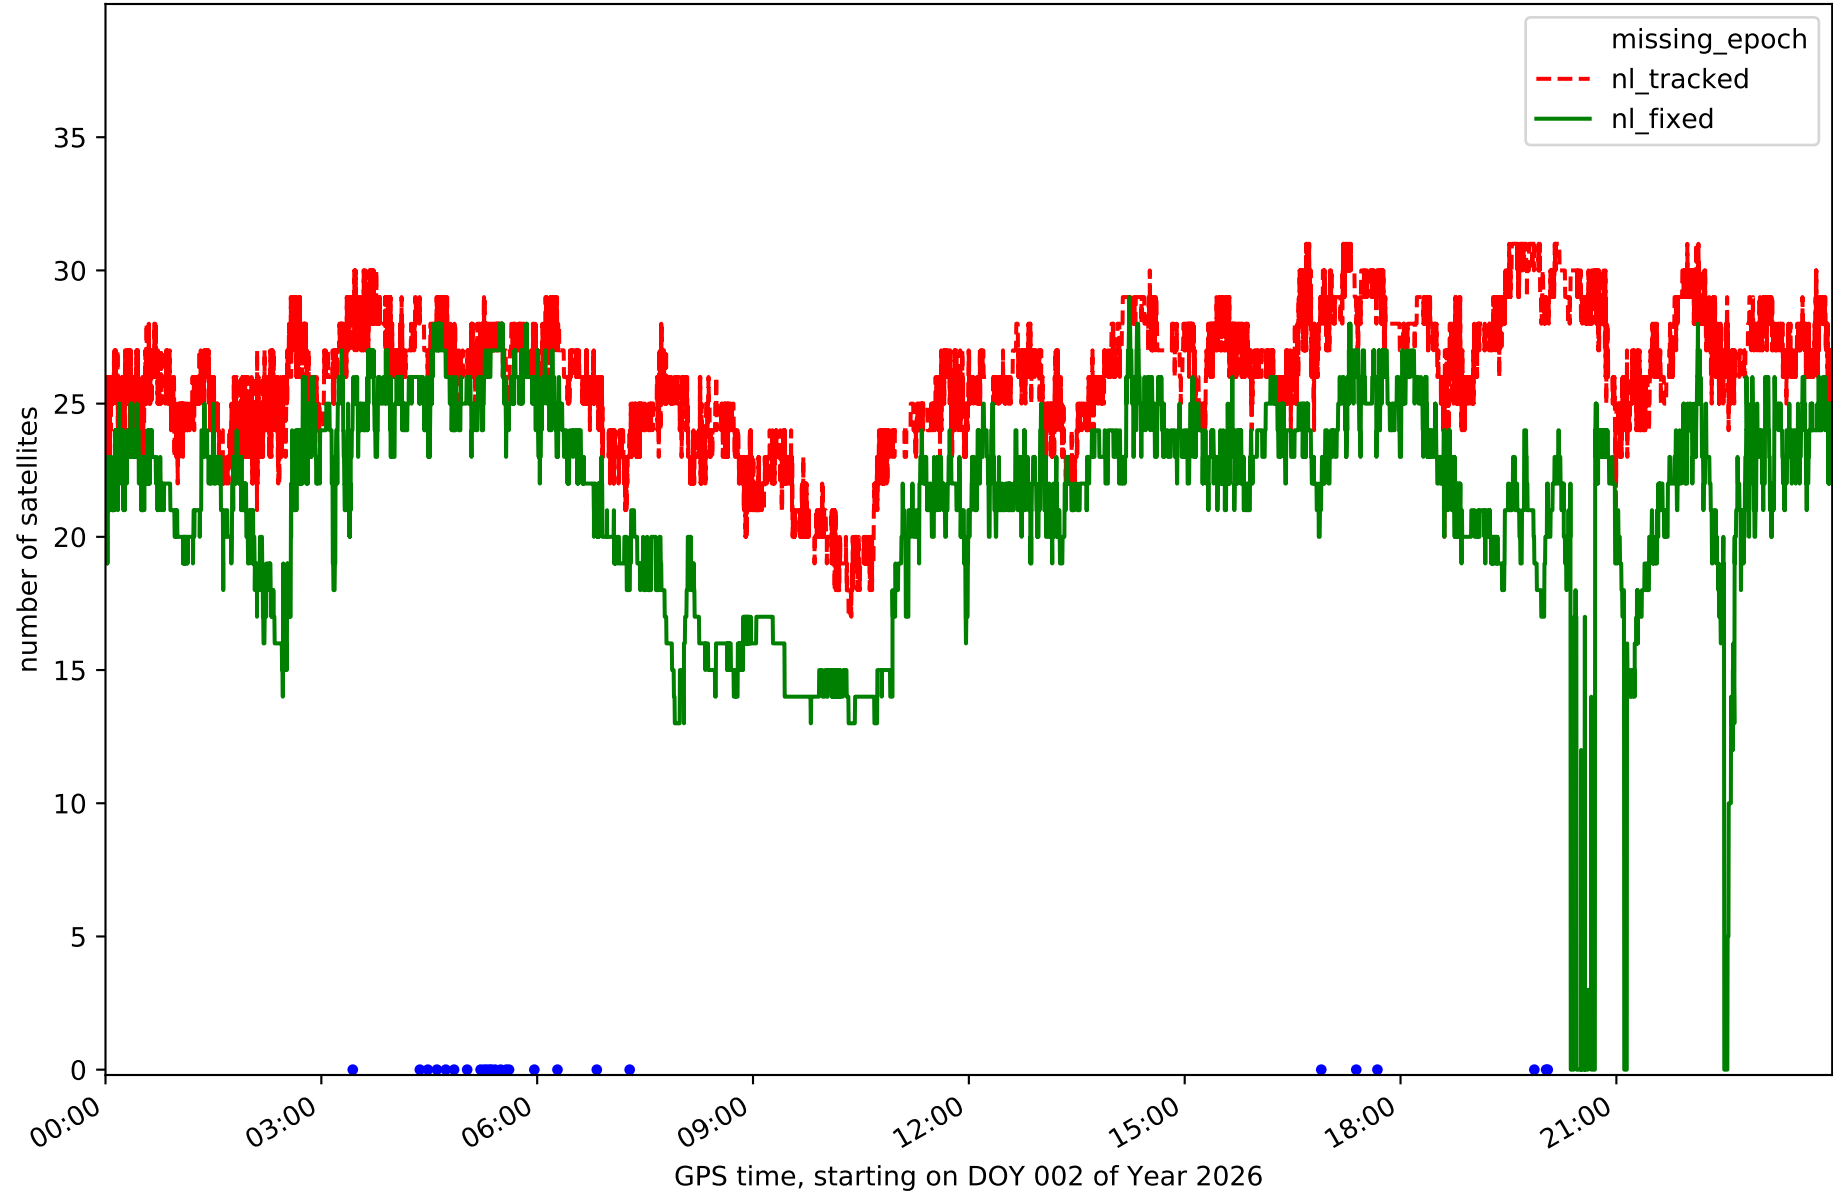


Station TN06 in network N32T

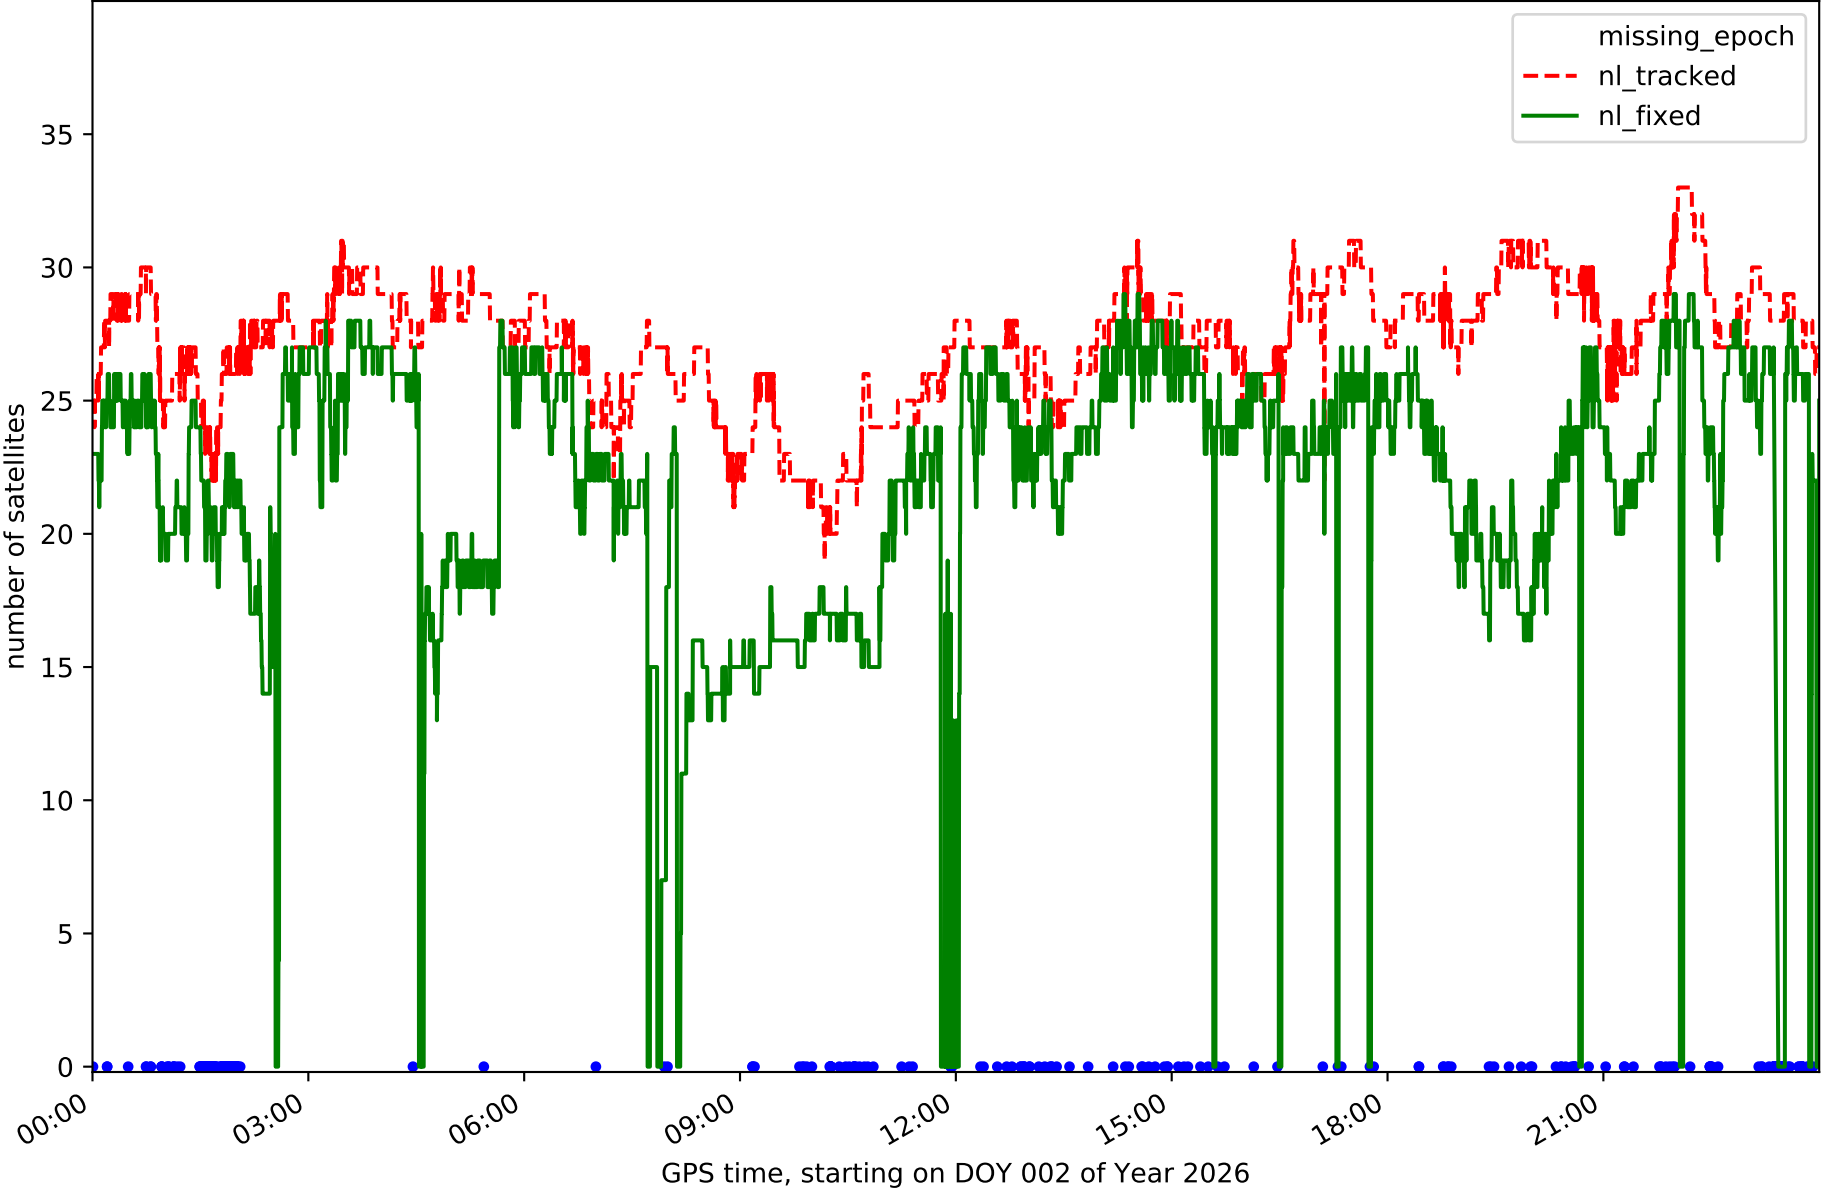


Station TN09 in network N32T

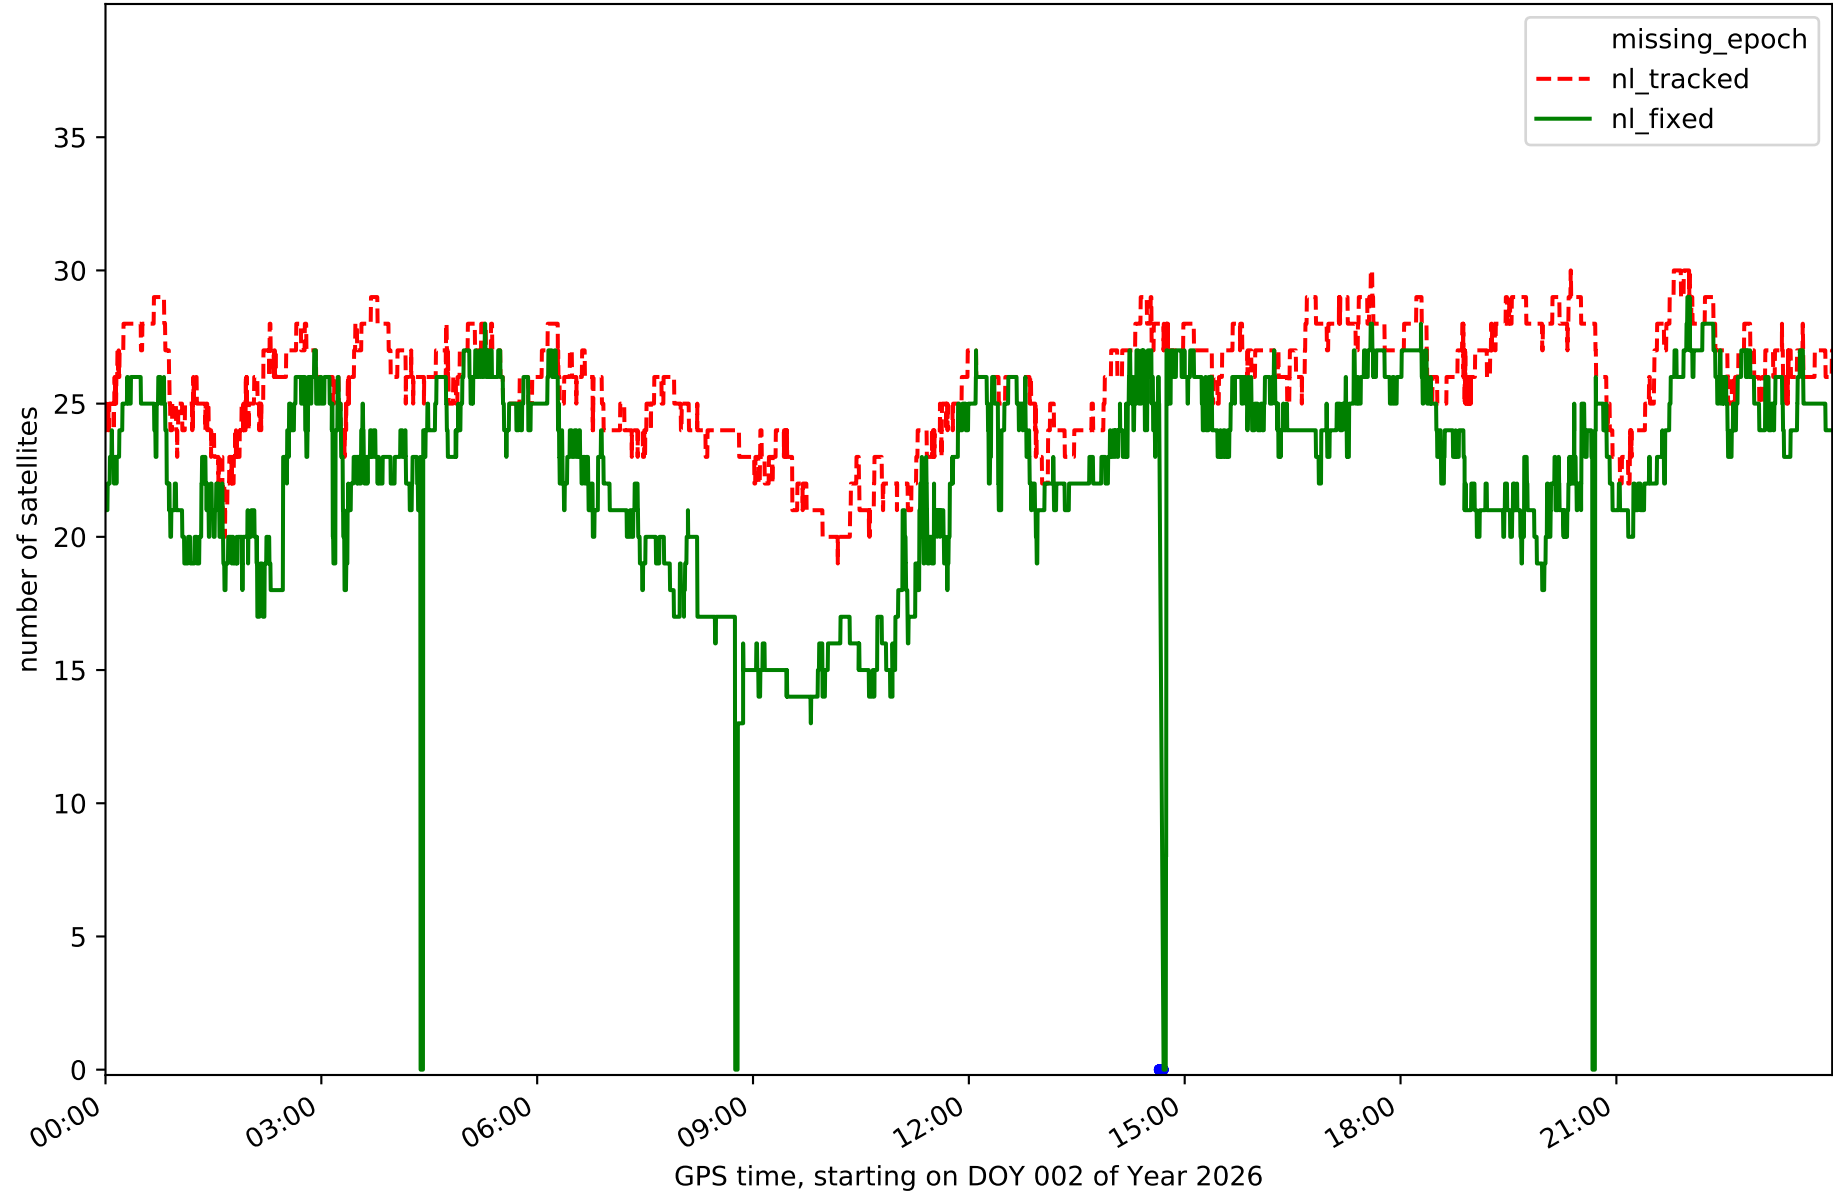


Station TE11 in network N32T

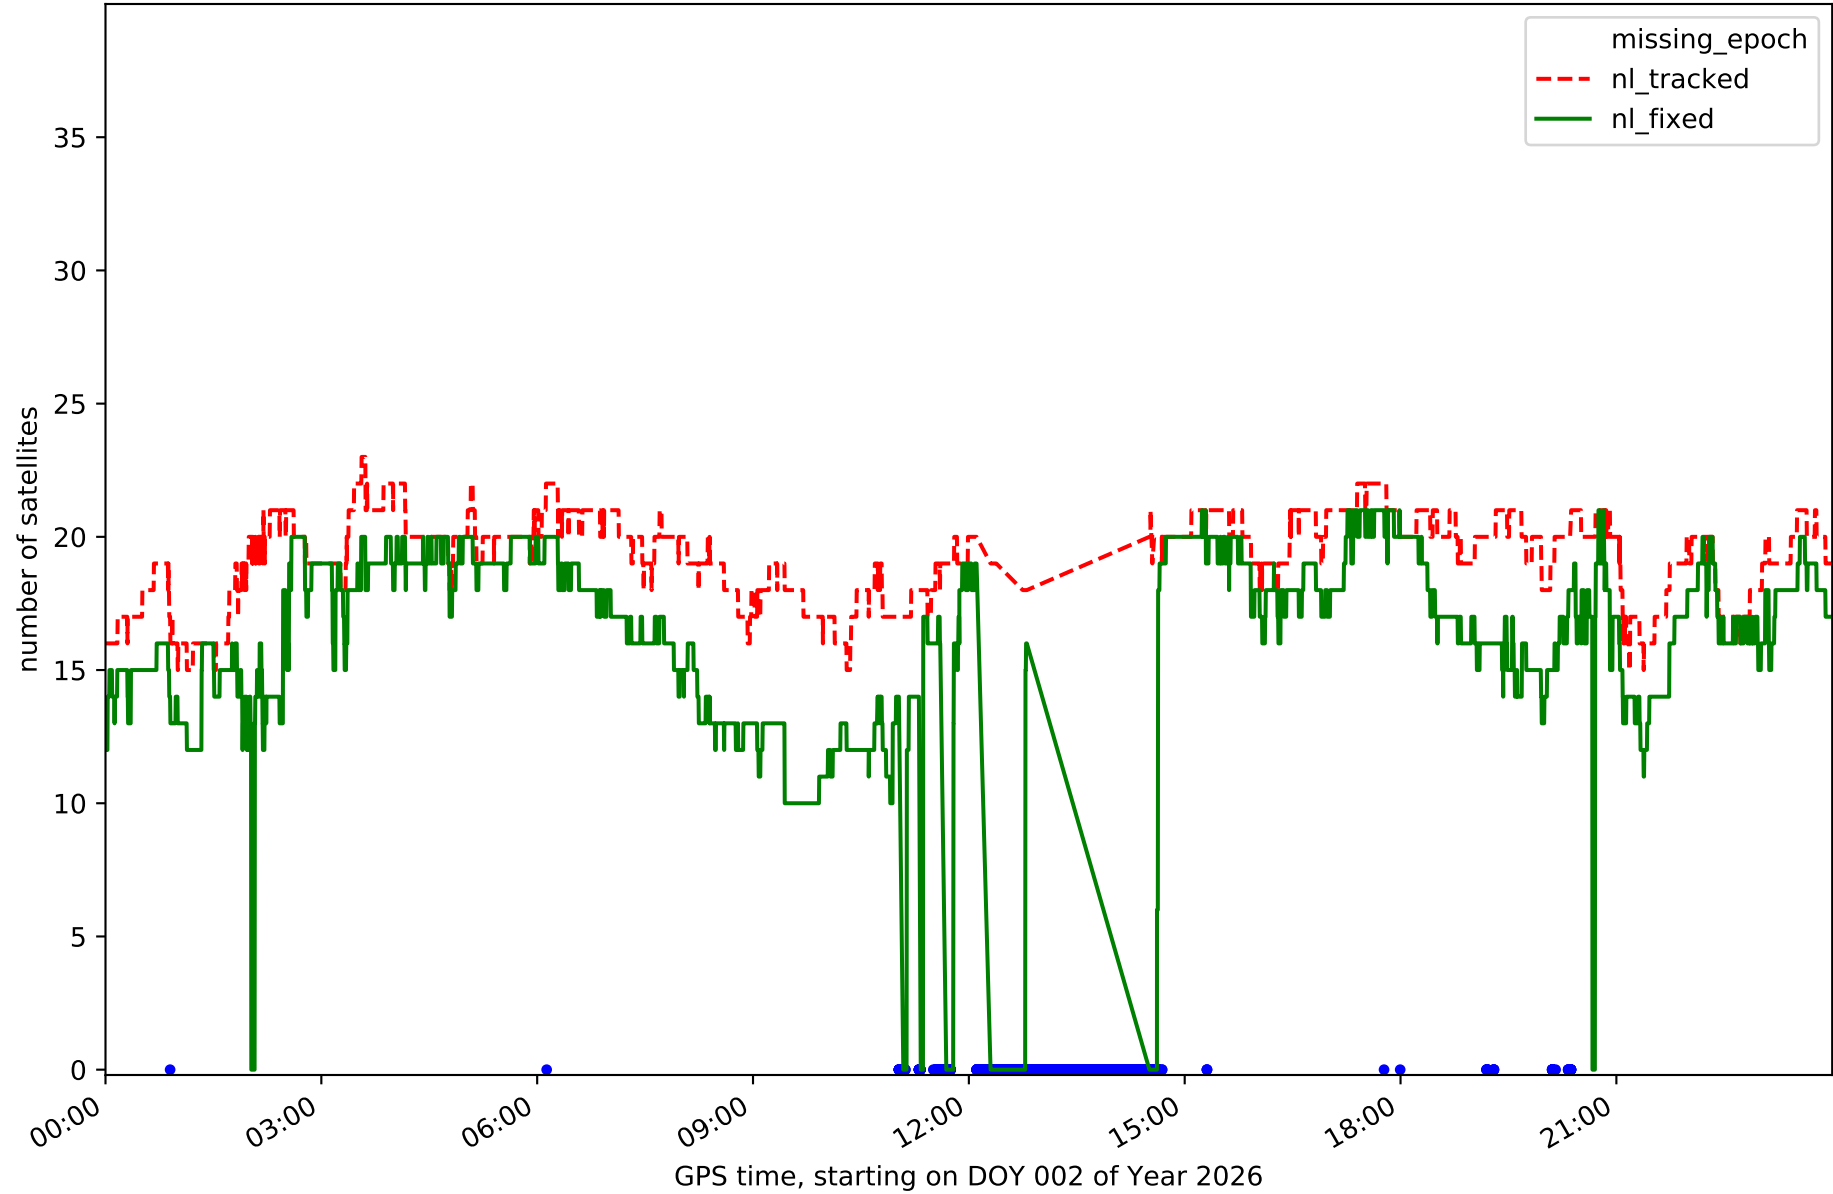


RefCheck for station EH01 in network N32T

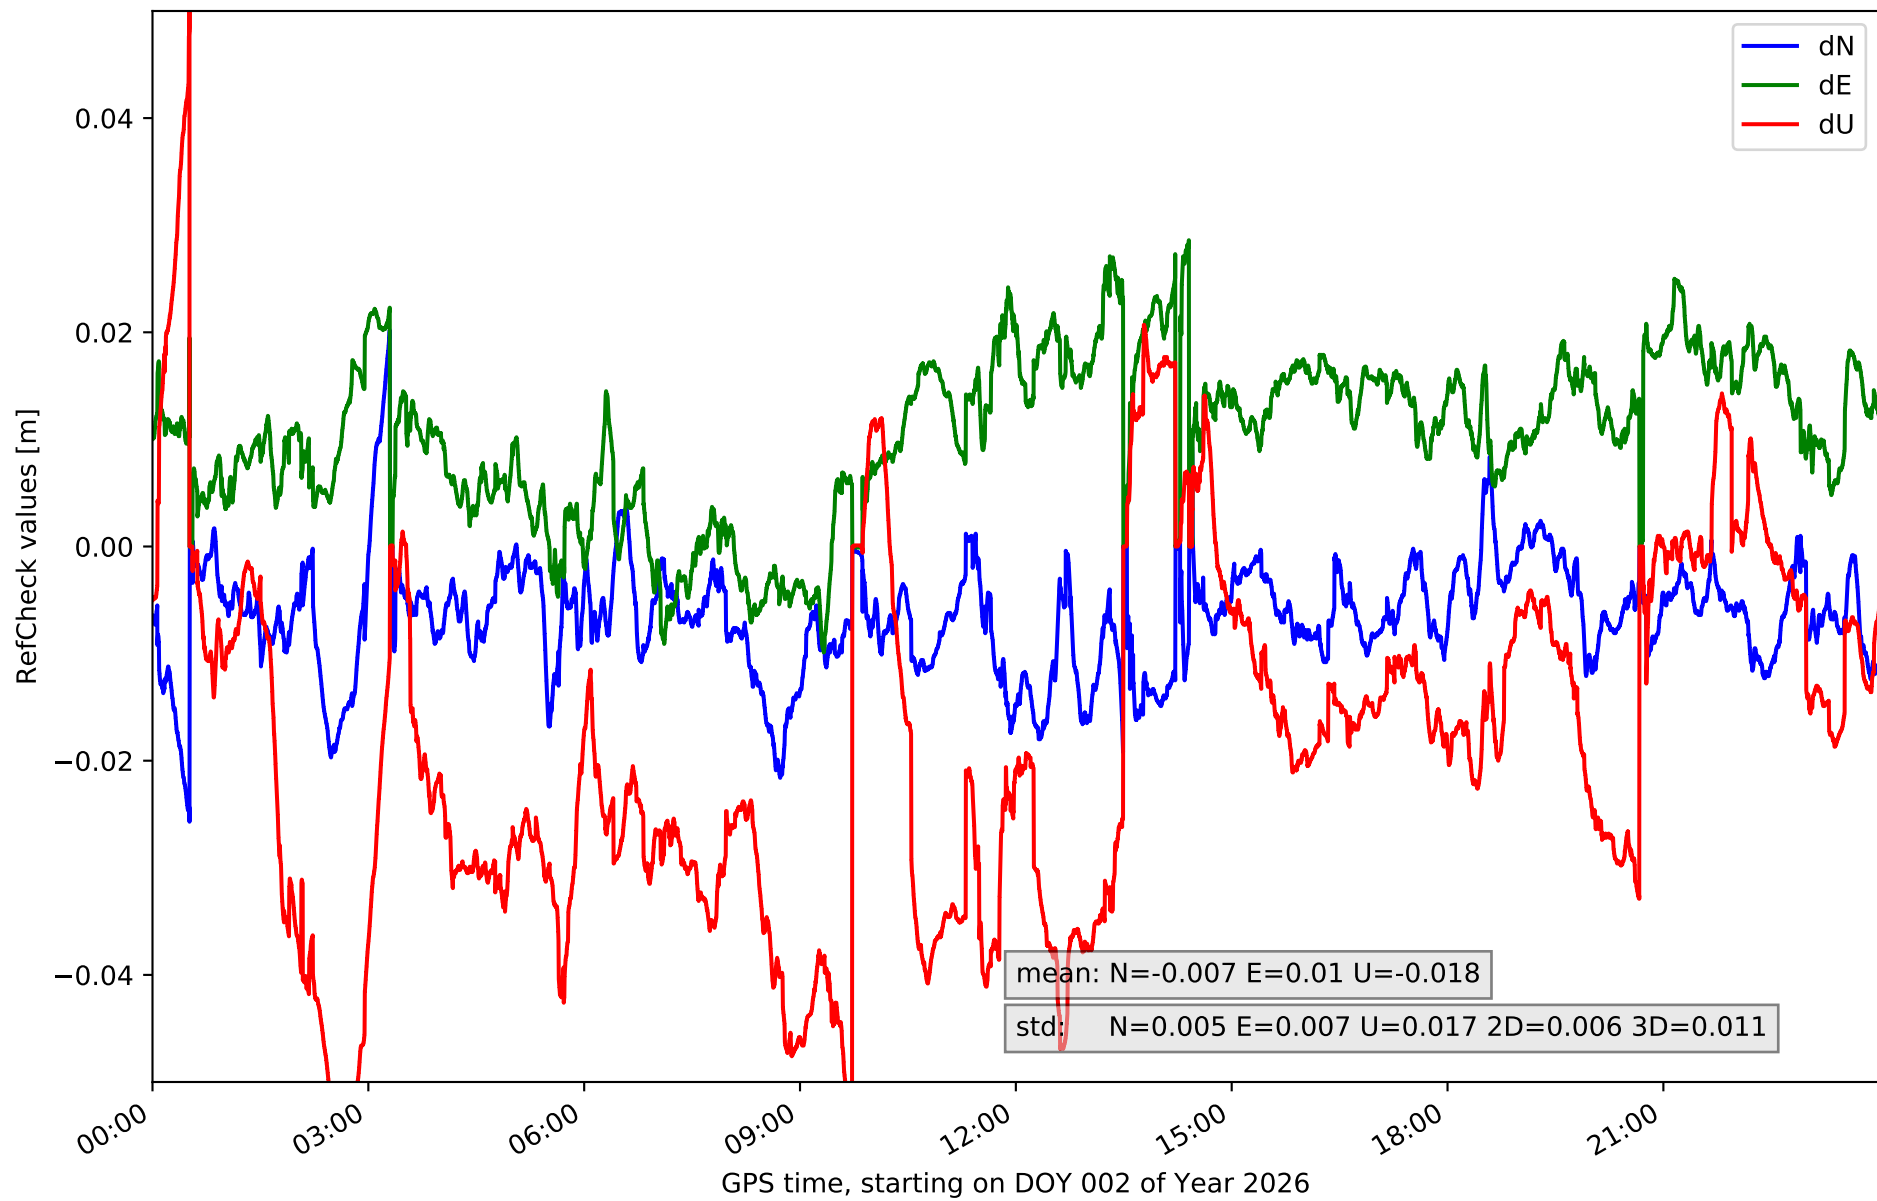


RefCheck for station EH02 in network N32T

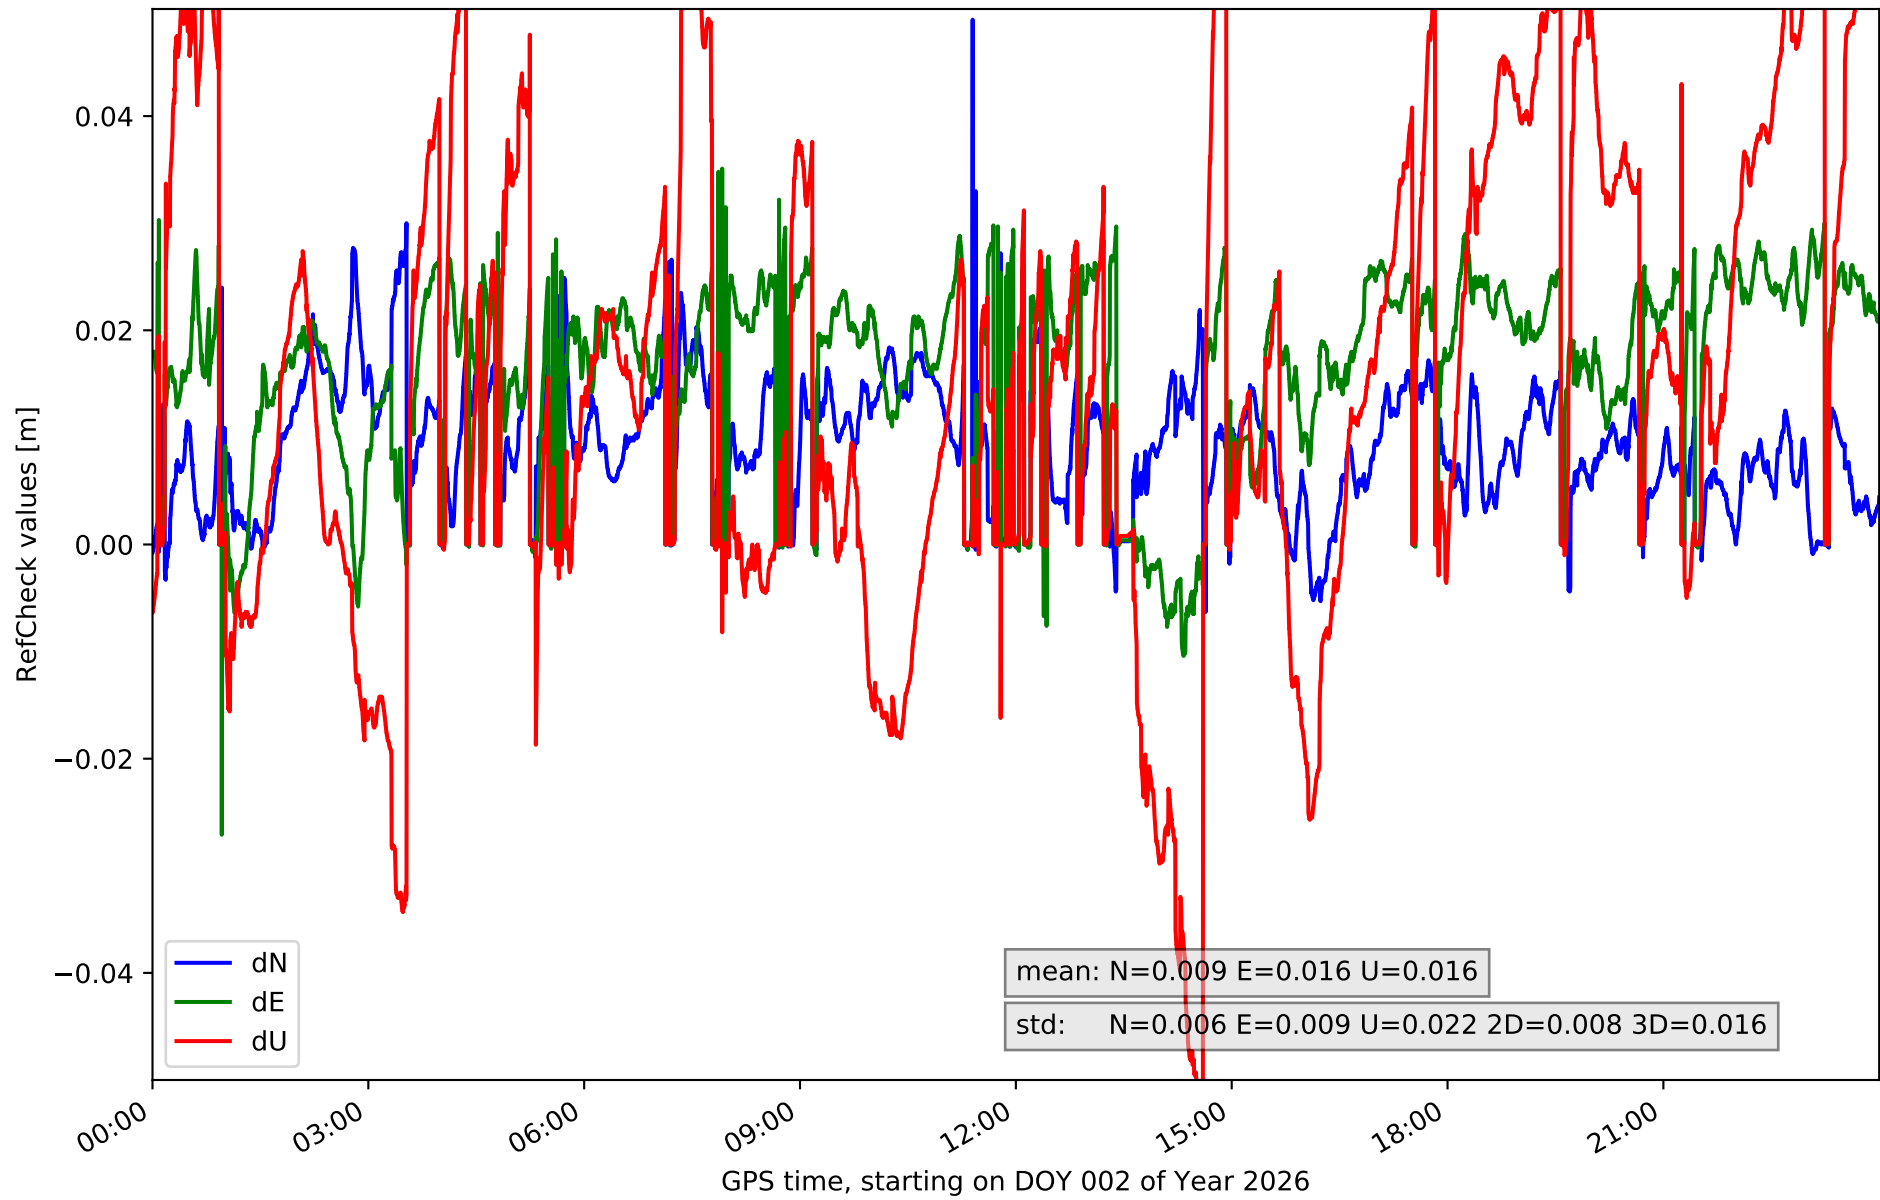


RefCheck for station GOM1 in network N32T

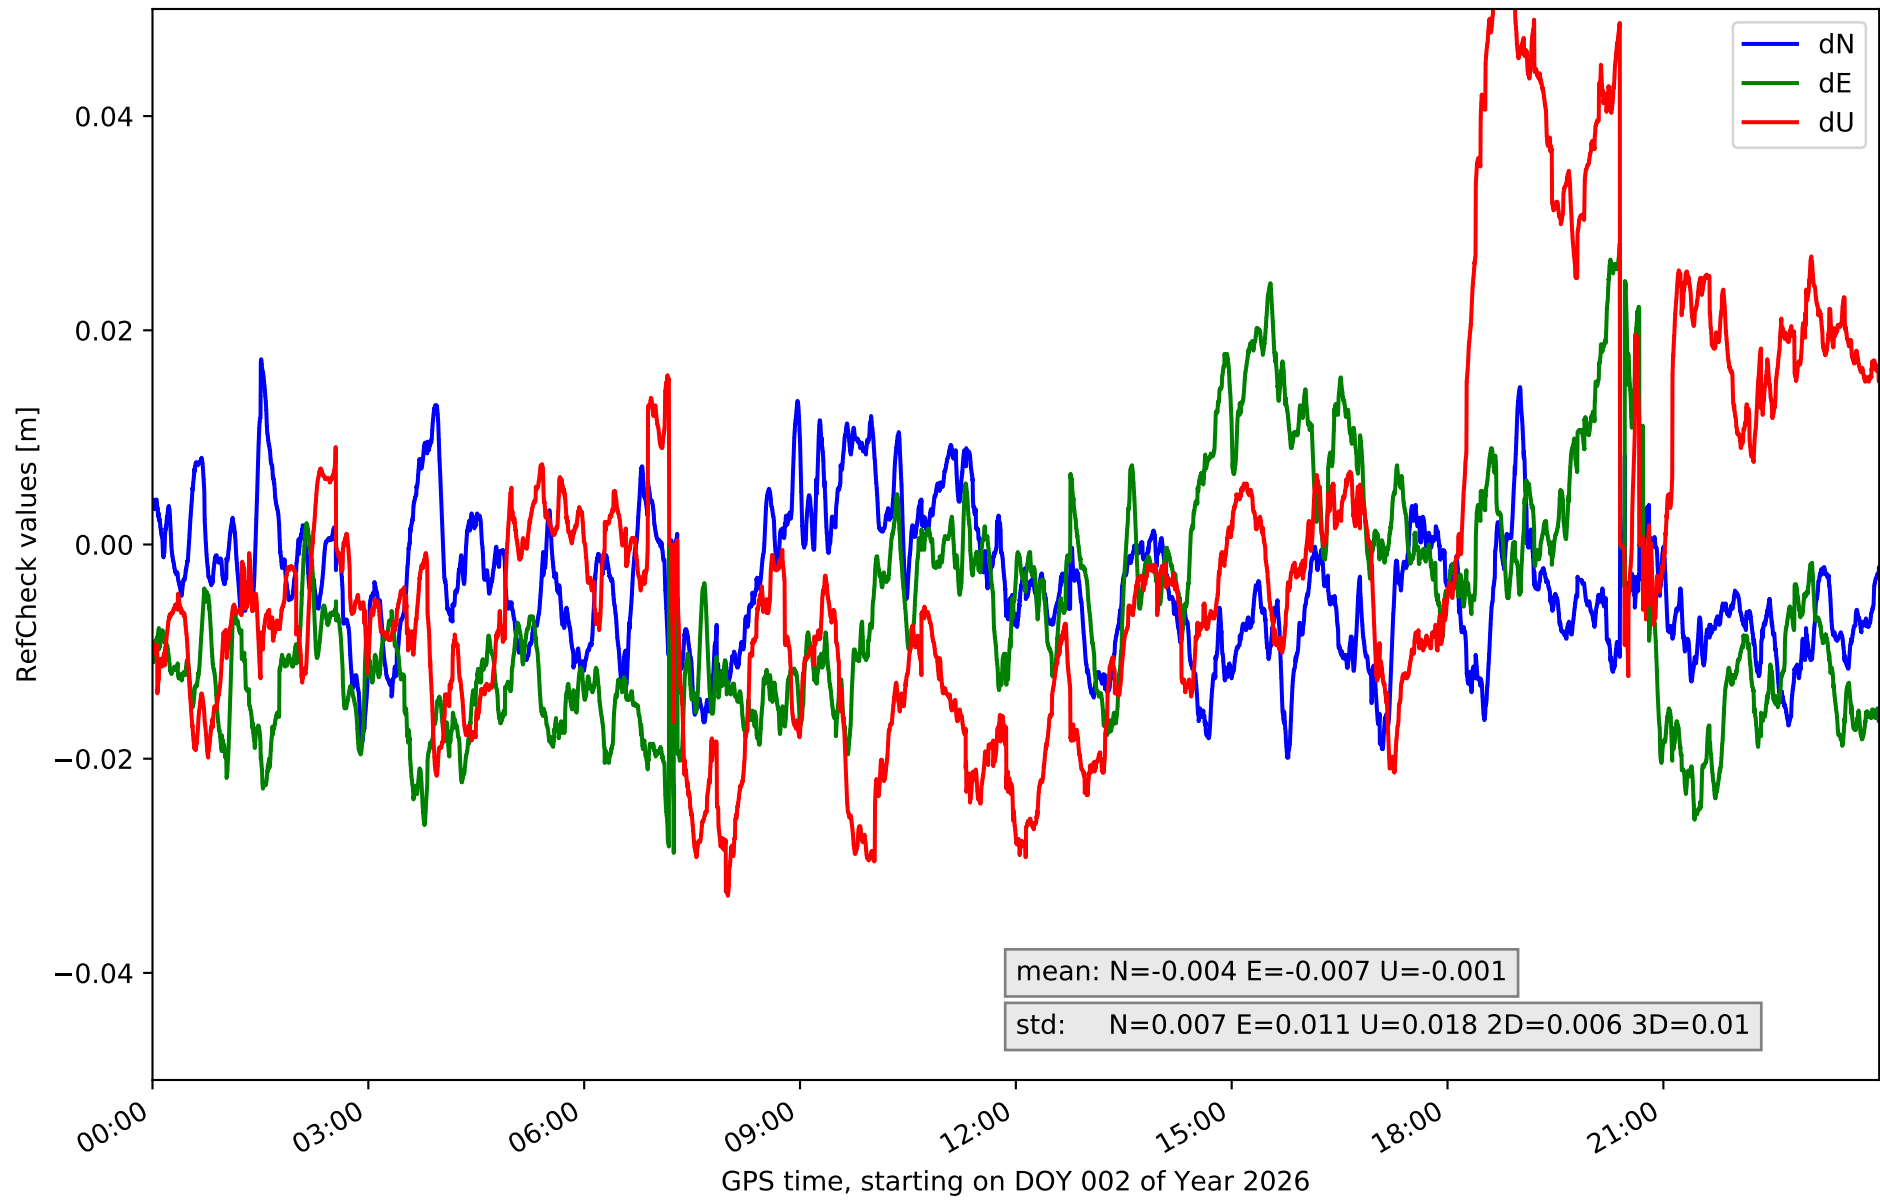


RefCheck for station GOME in network N32T

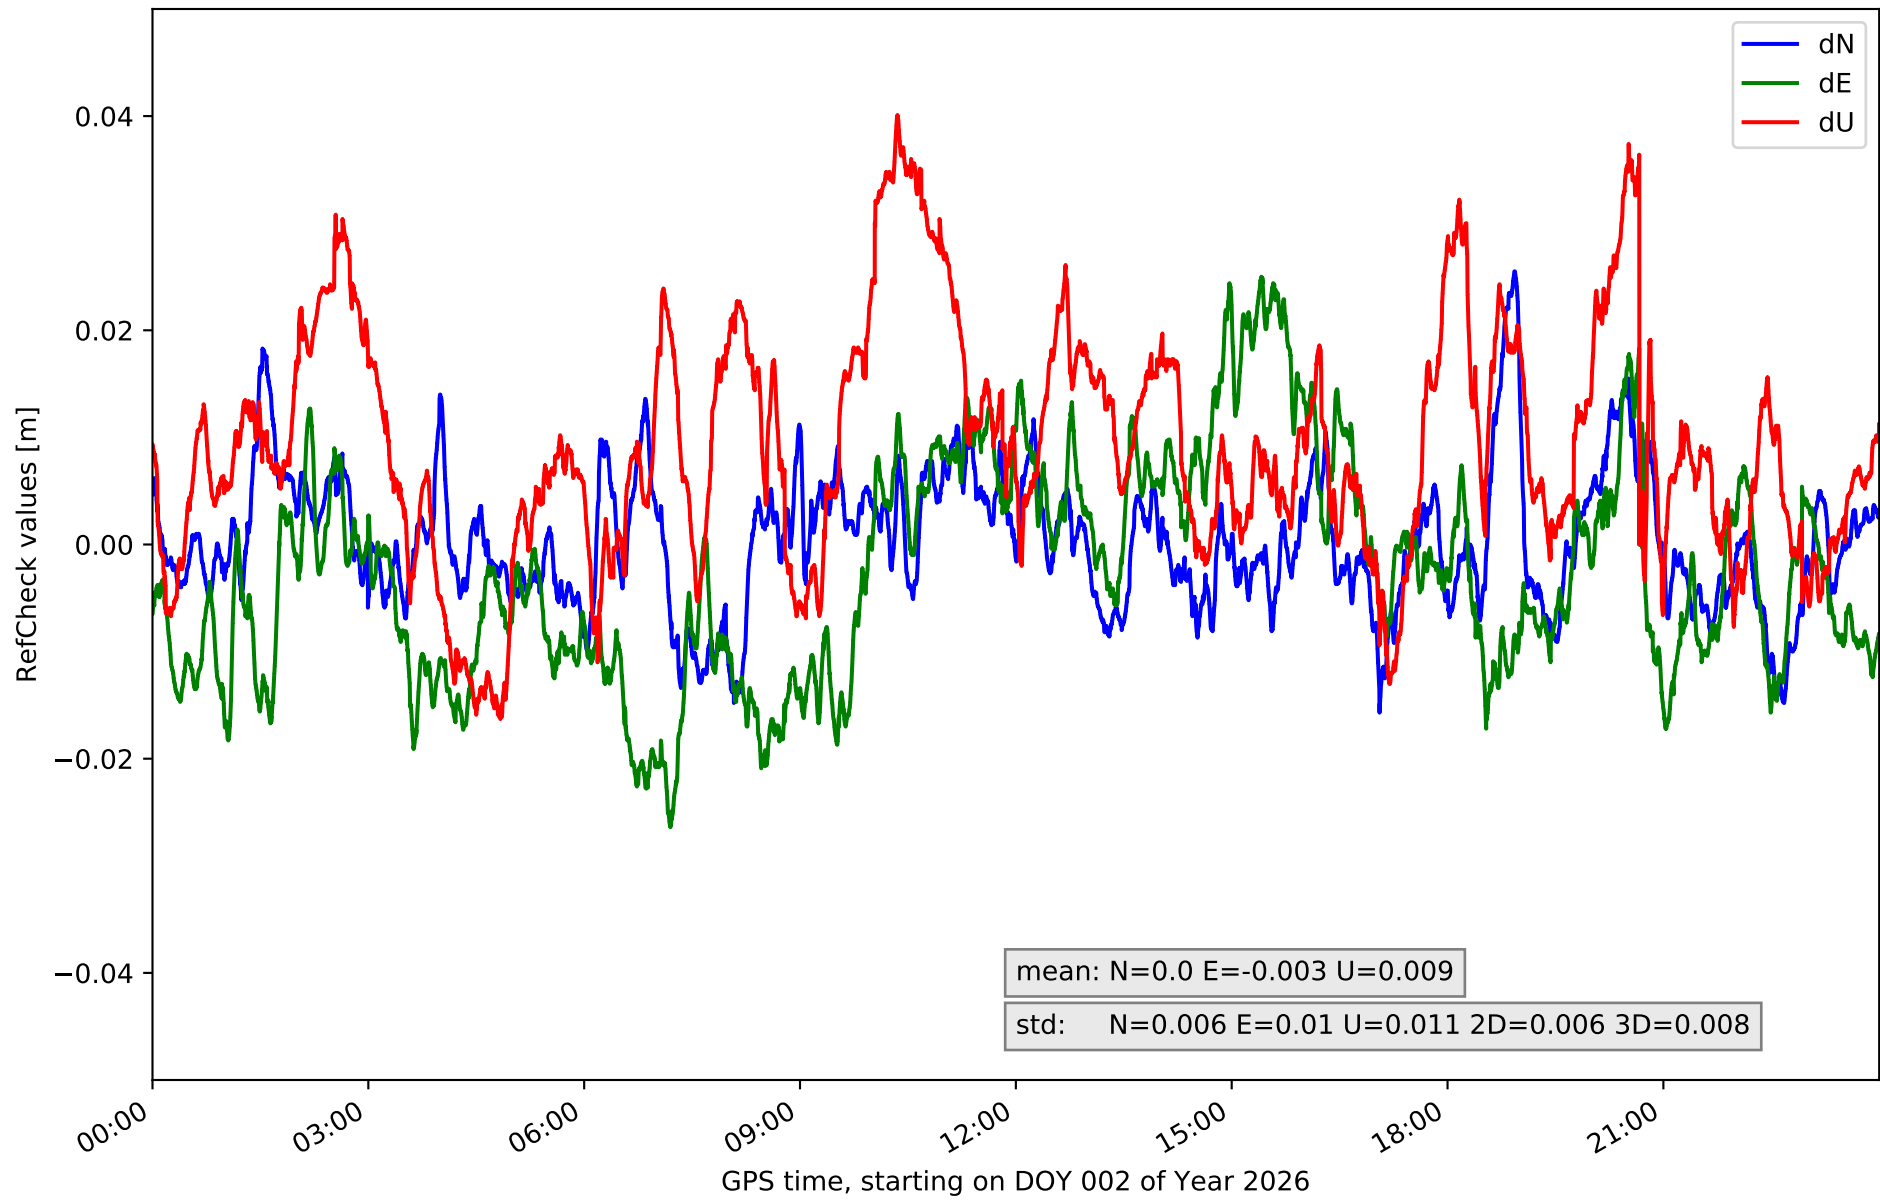


RefCheck for station IZAN in network N32T

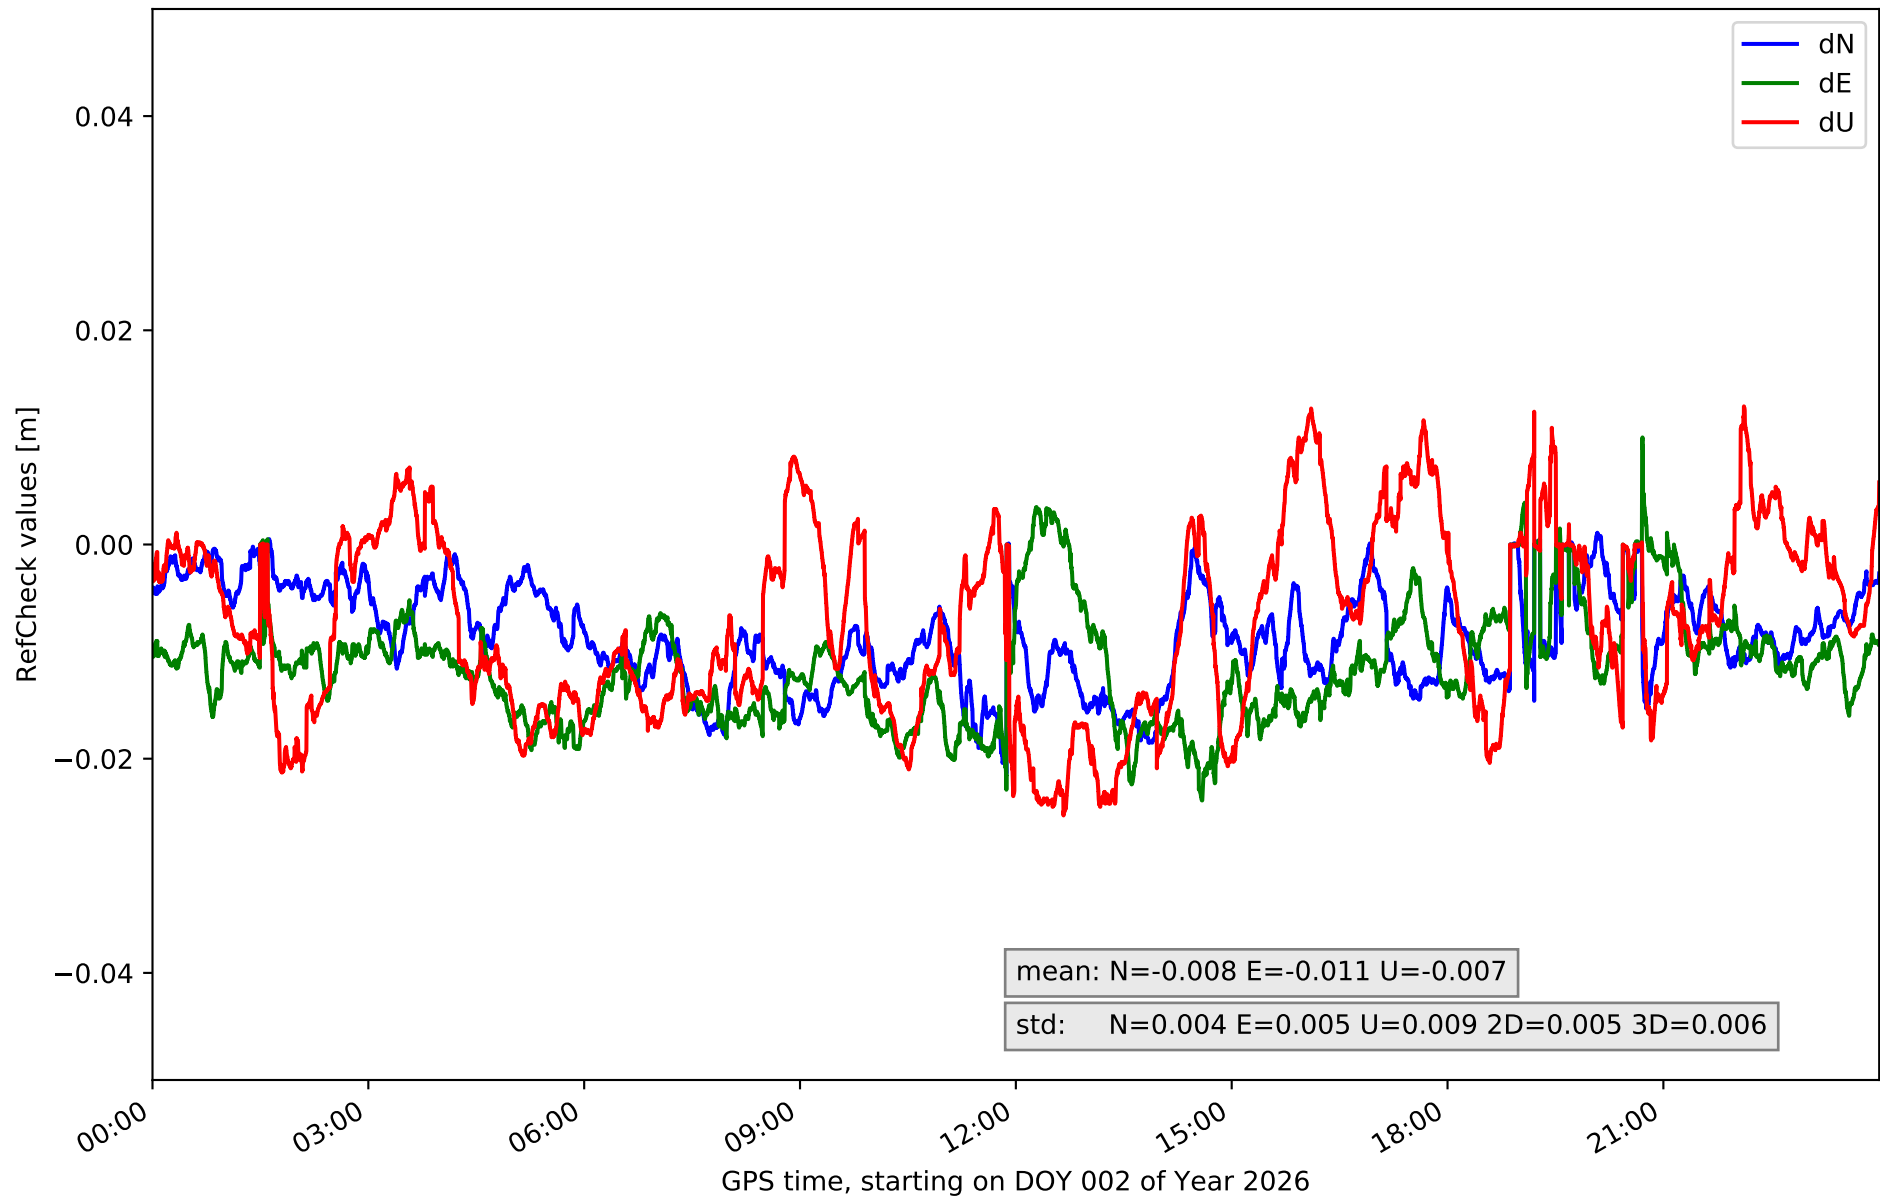


RefCheck for station LP01 in network N32T

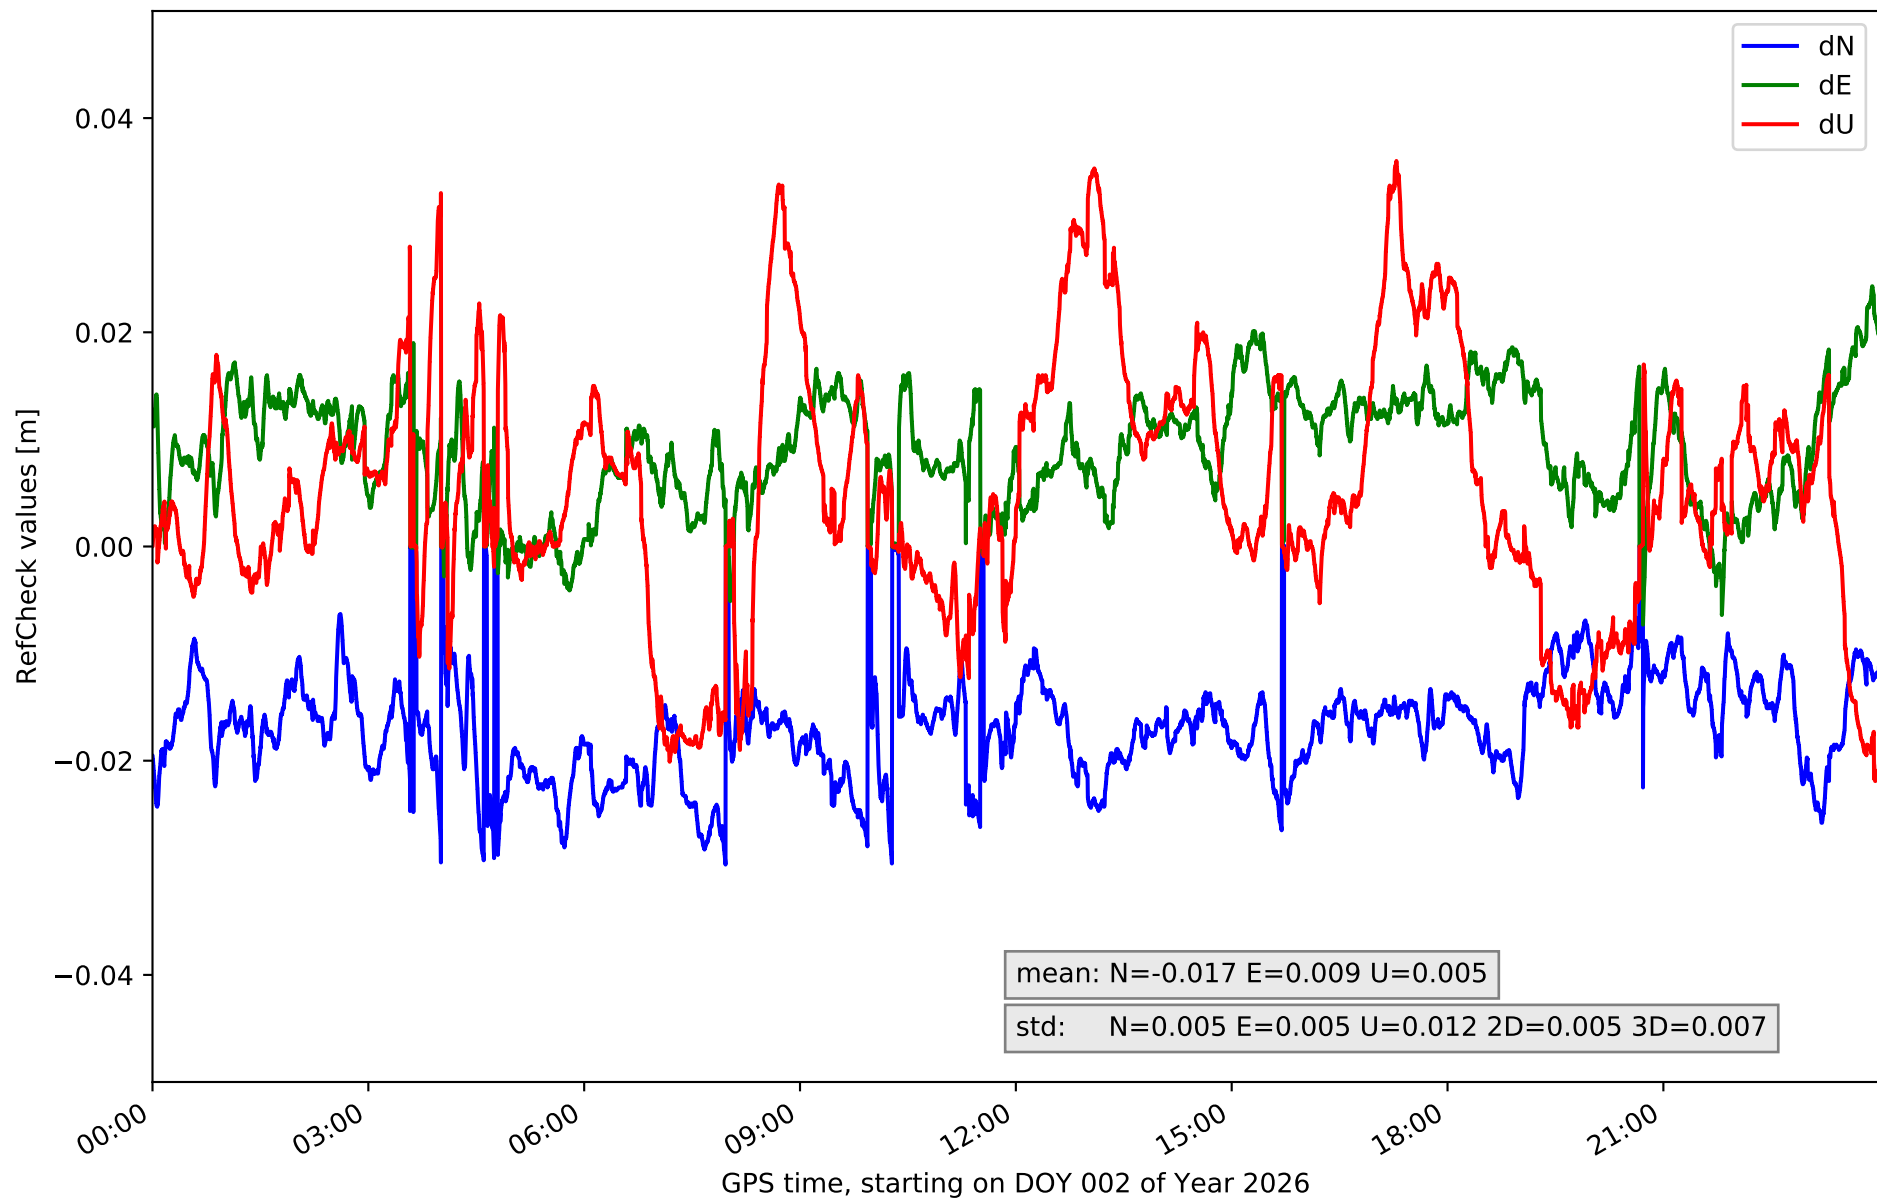


RefCheck for station LP03 in network N32T

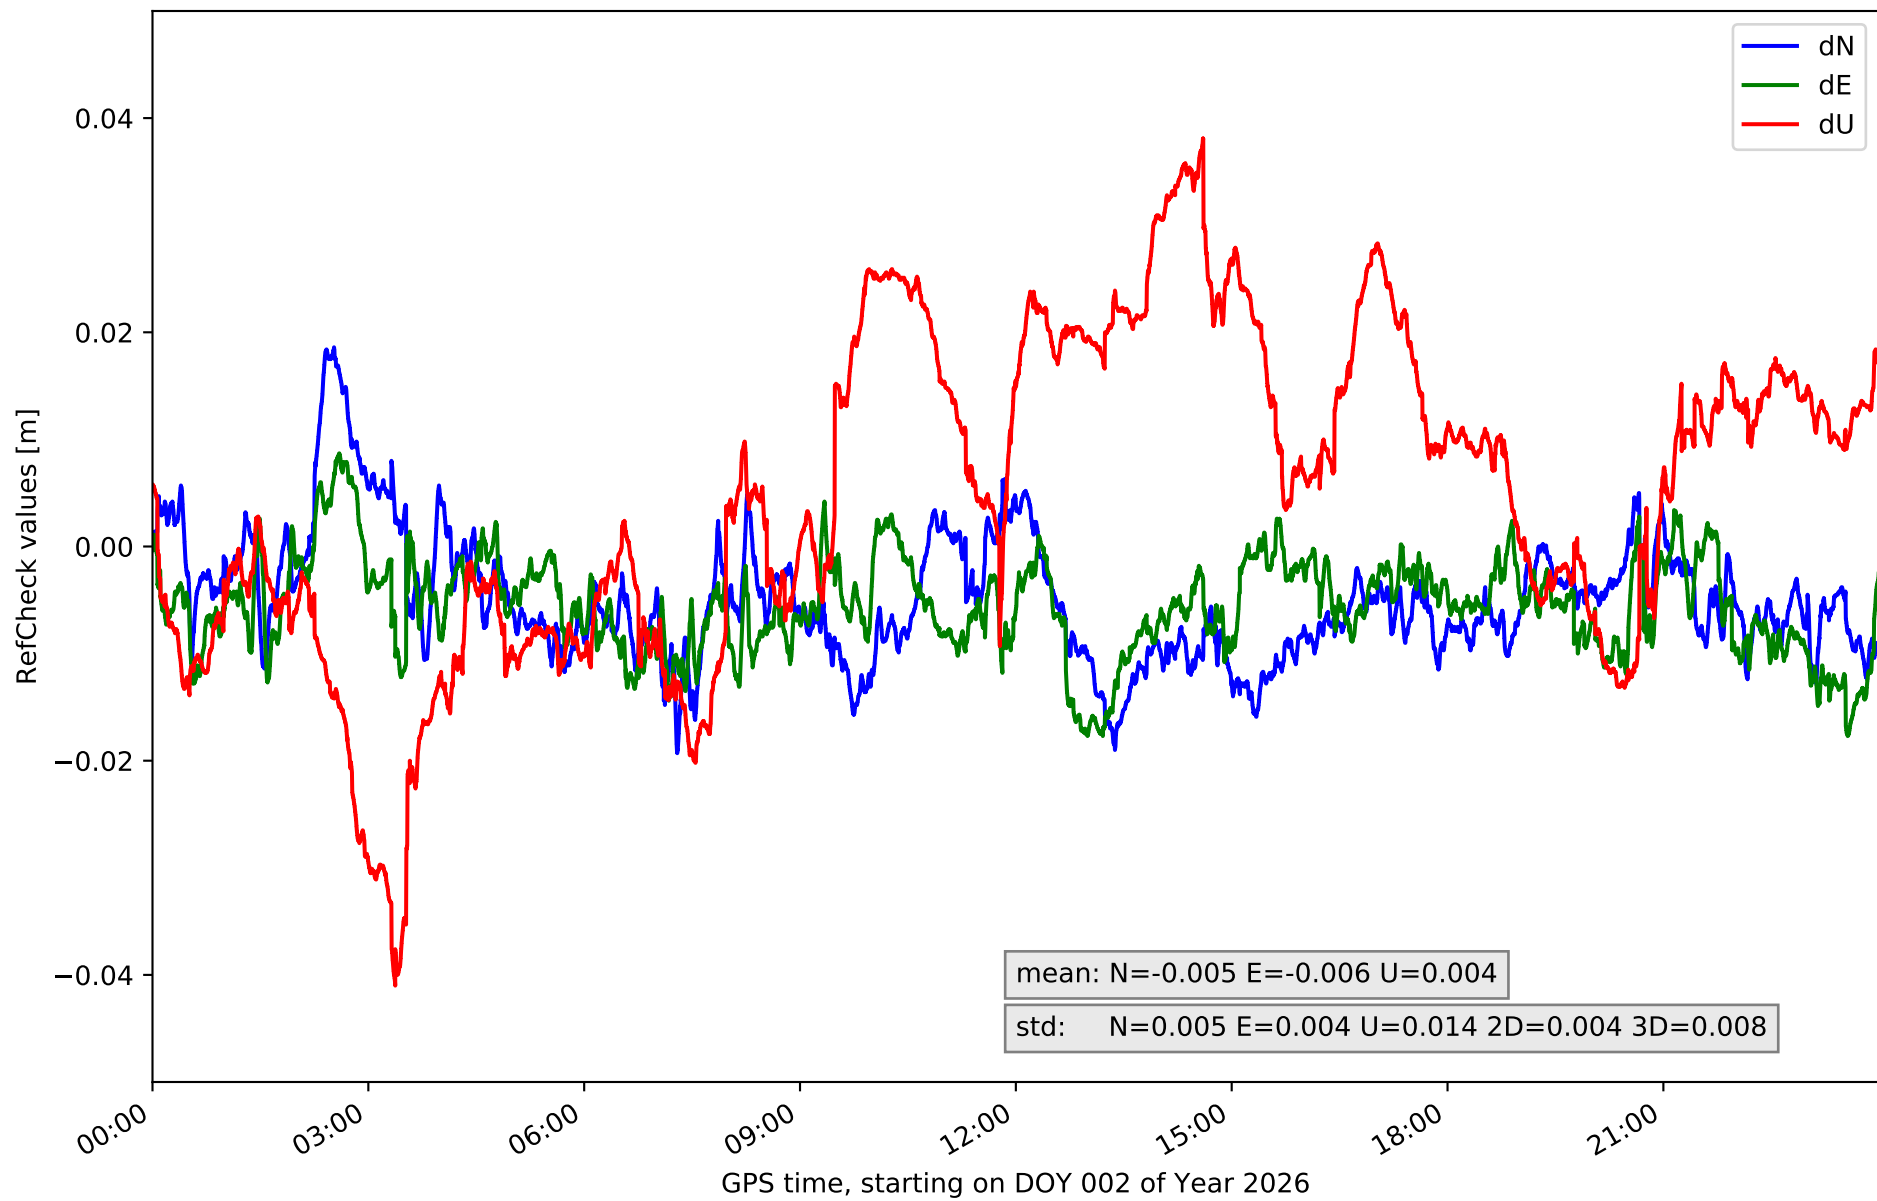


RefCheck for station LPAL in network N32T

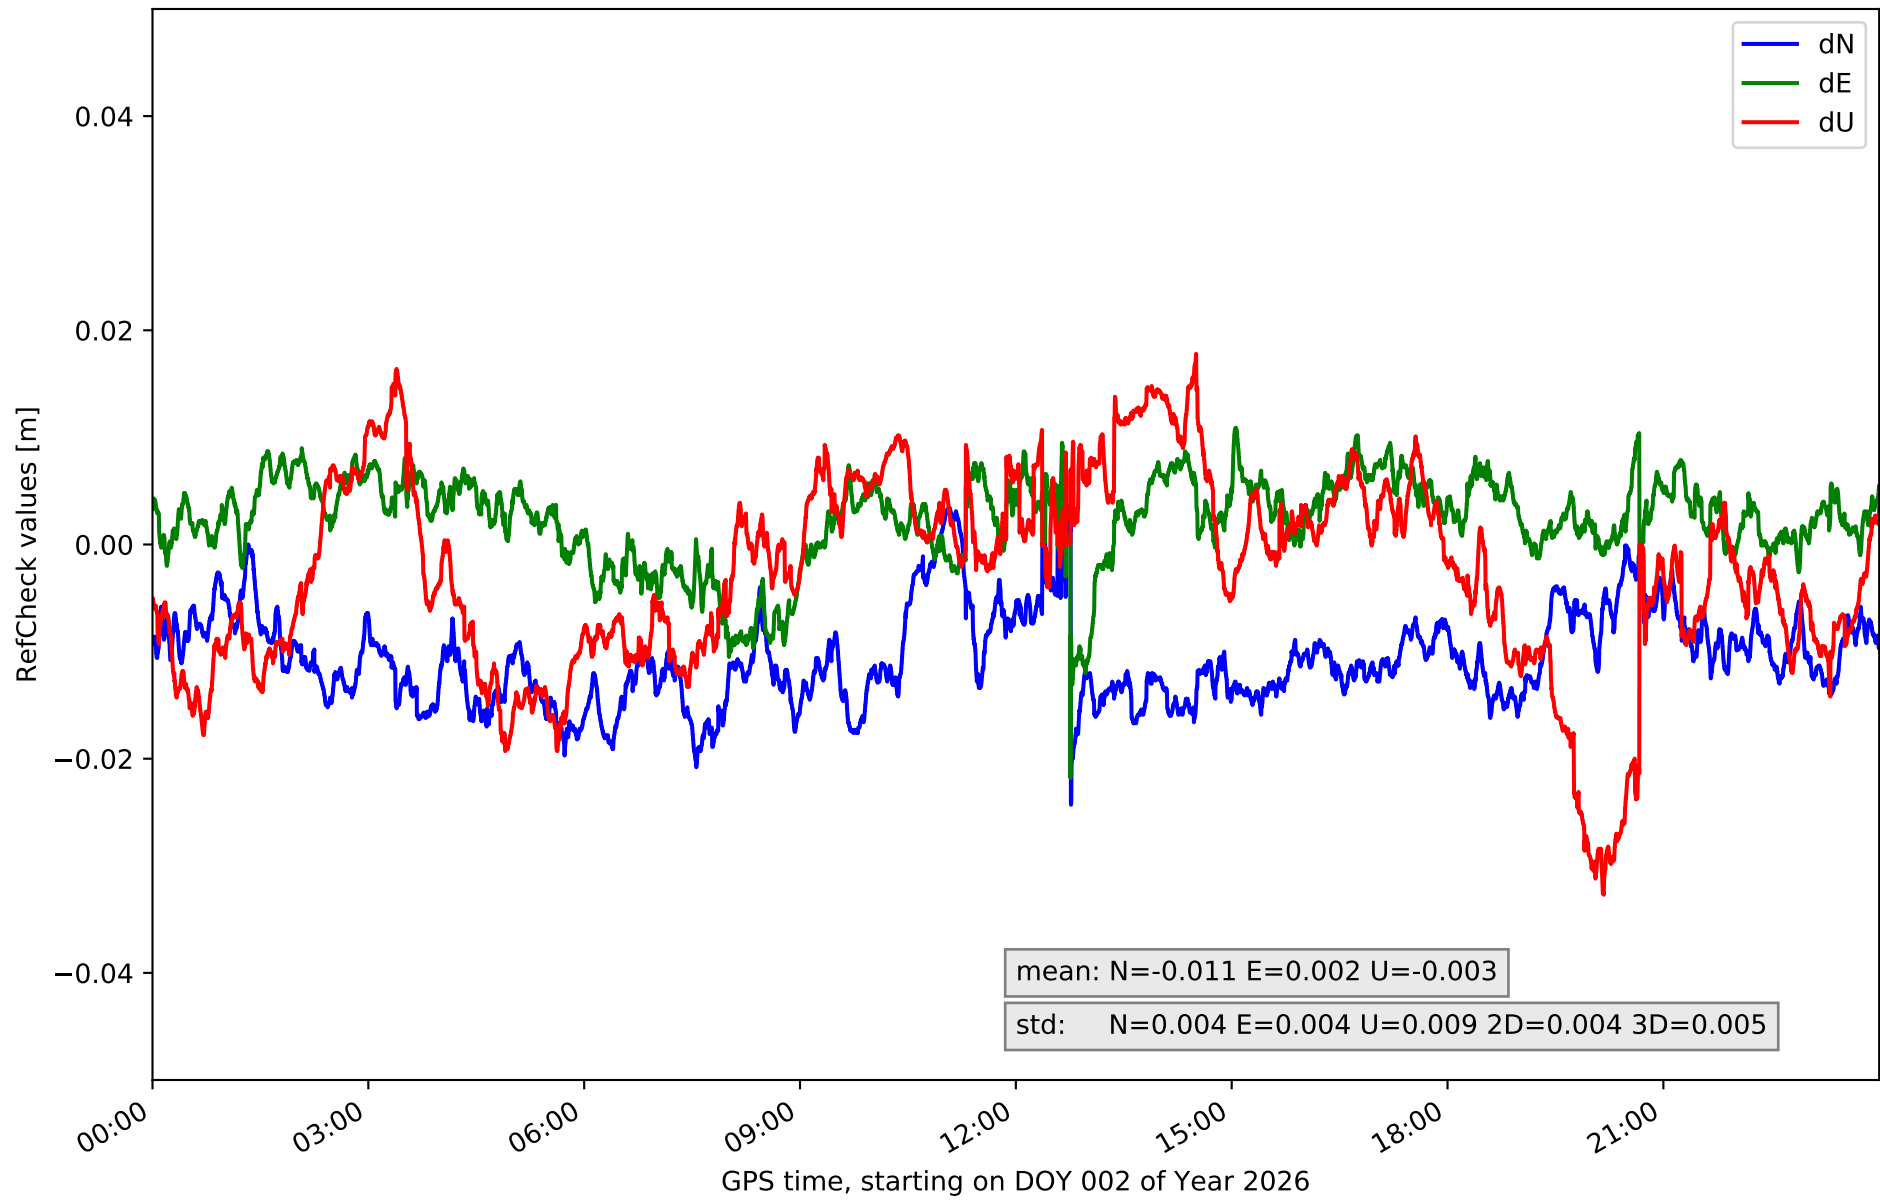


RefCheck for station LRES in network N32T

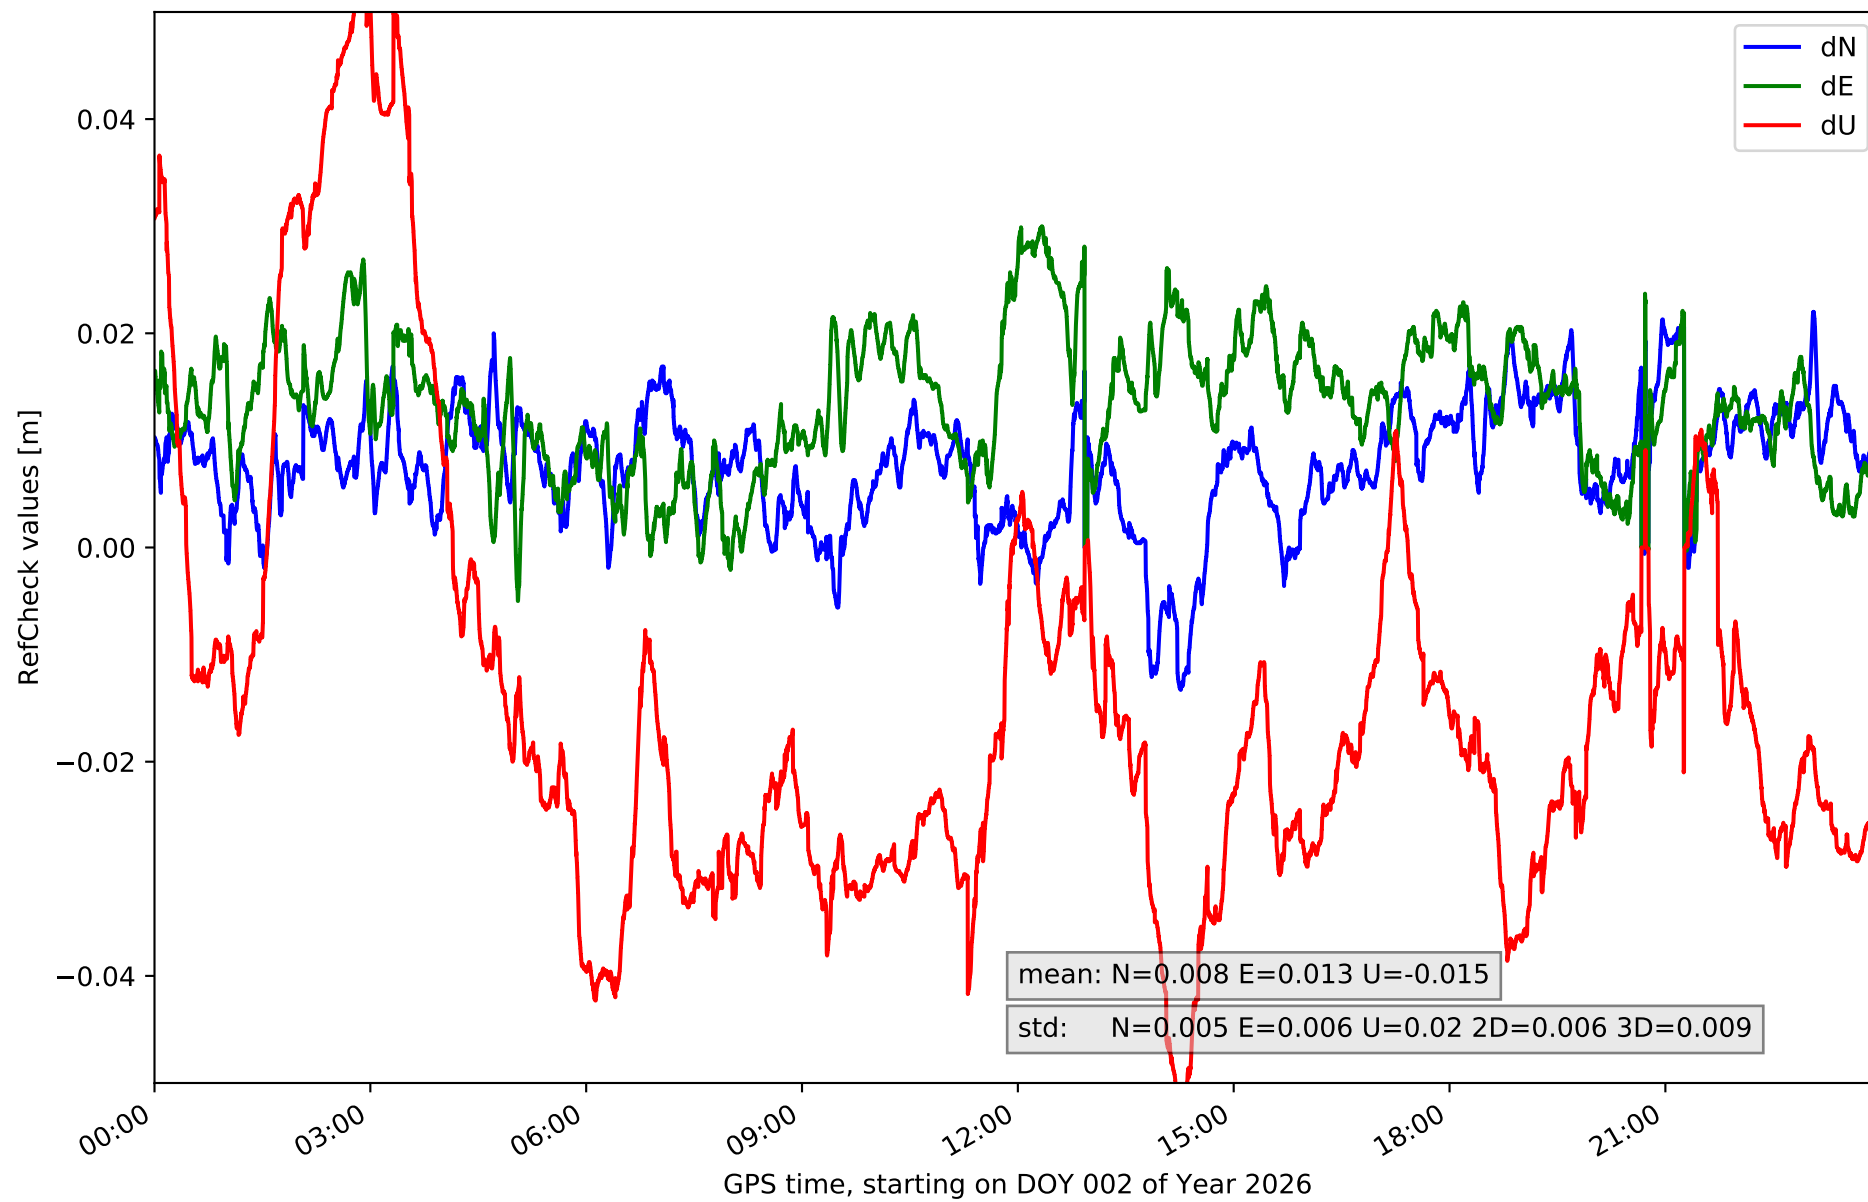


RefCheck for station TN01 in network N32T

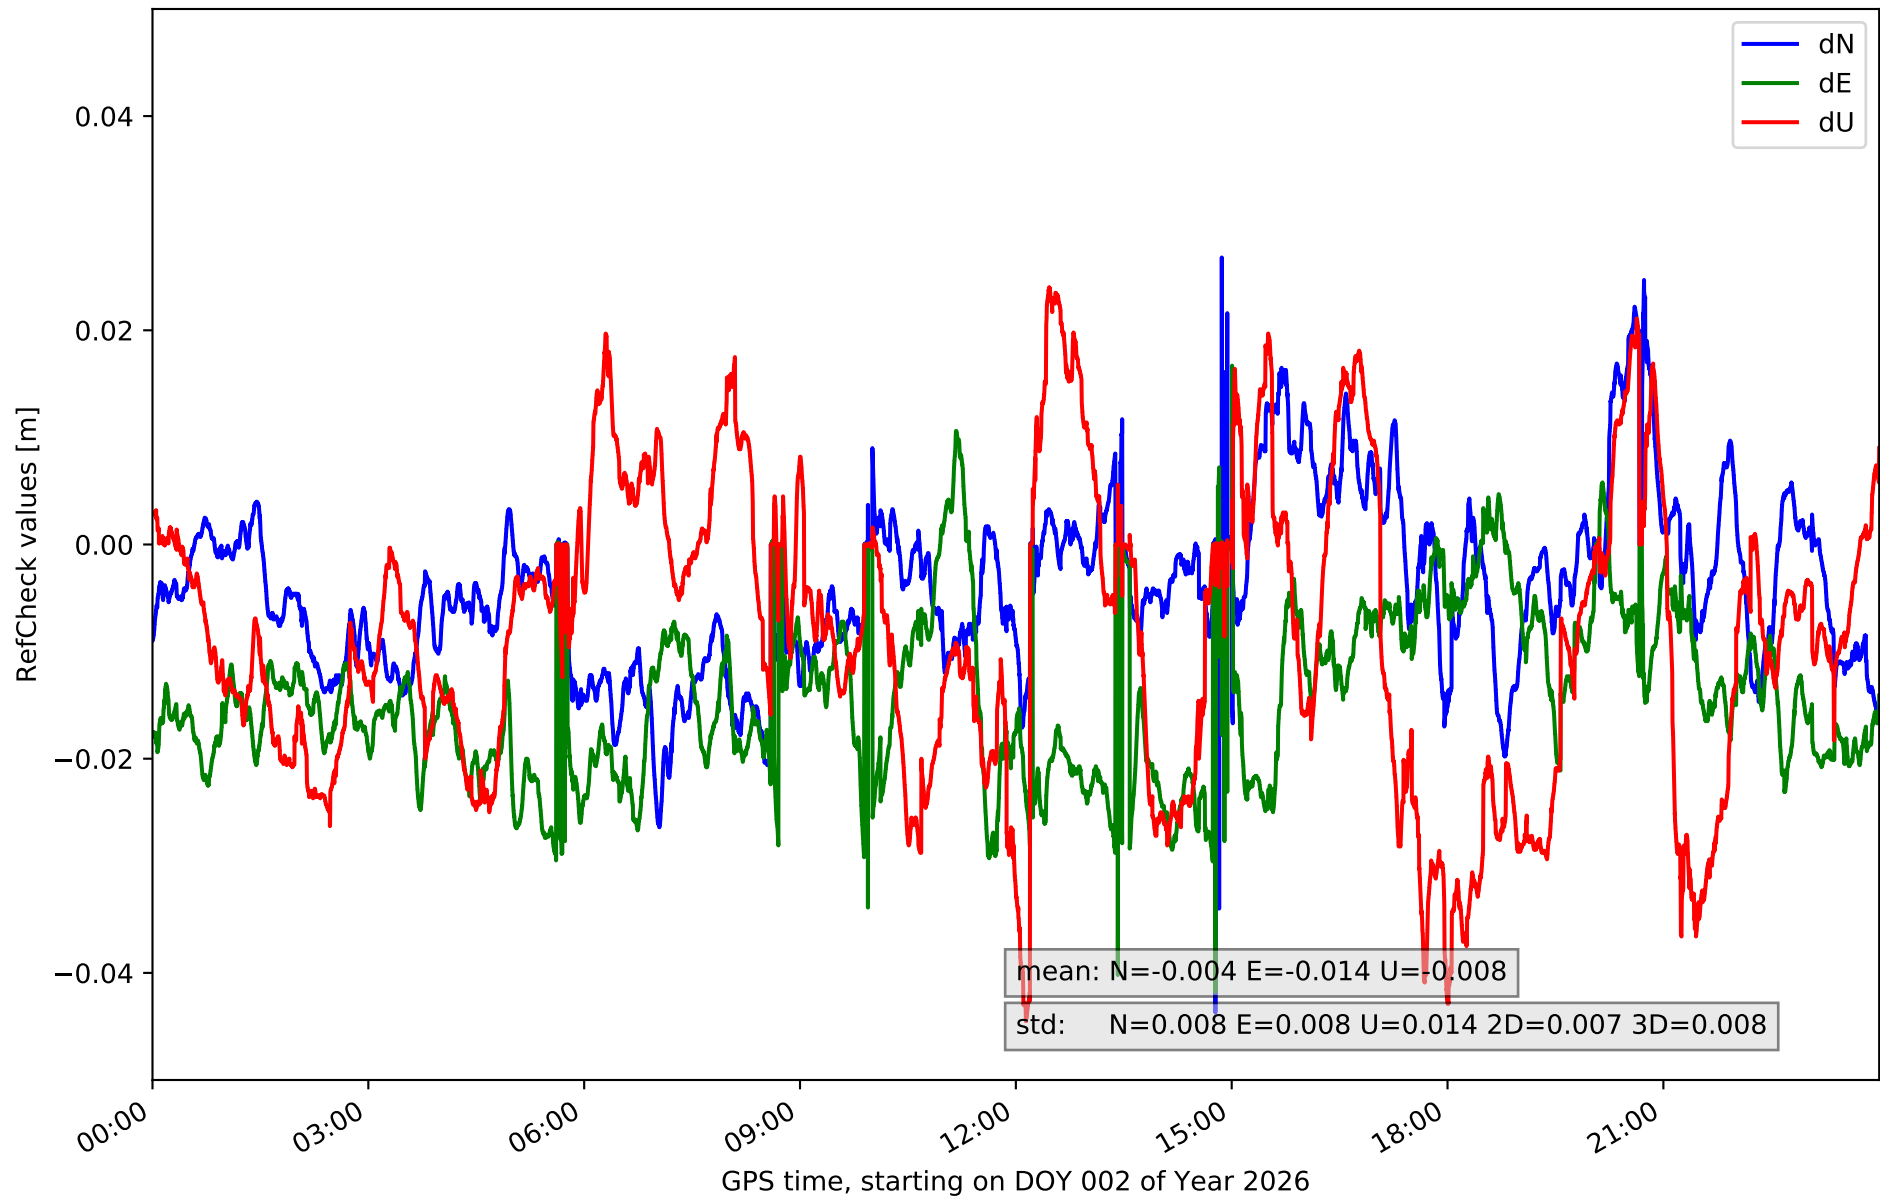


RefCheck for station TN02 in network N32T

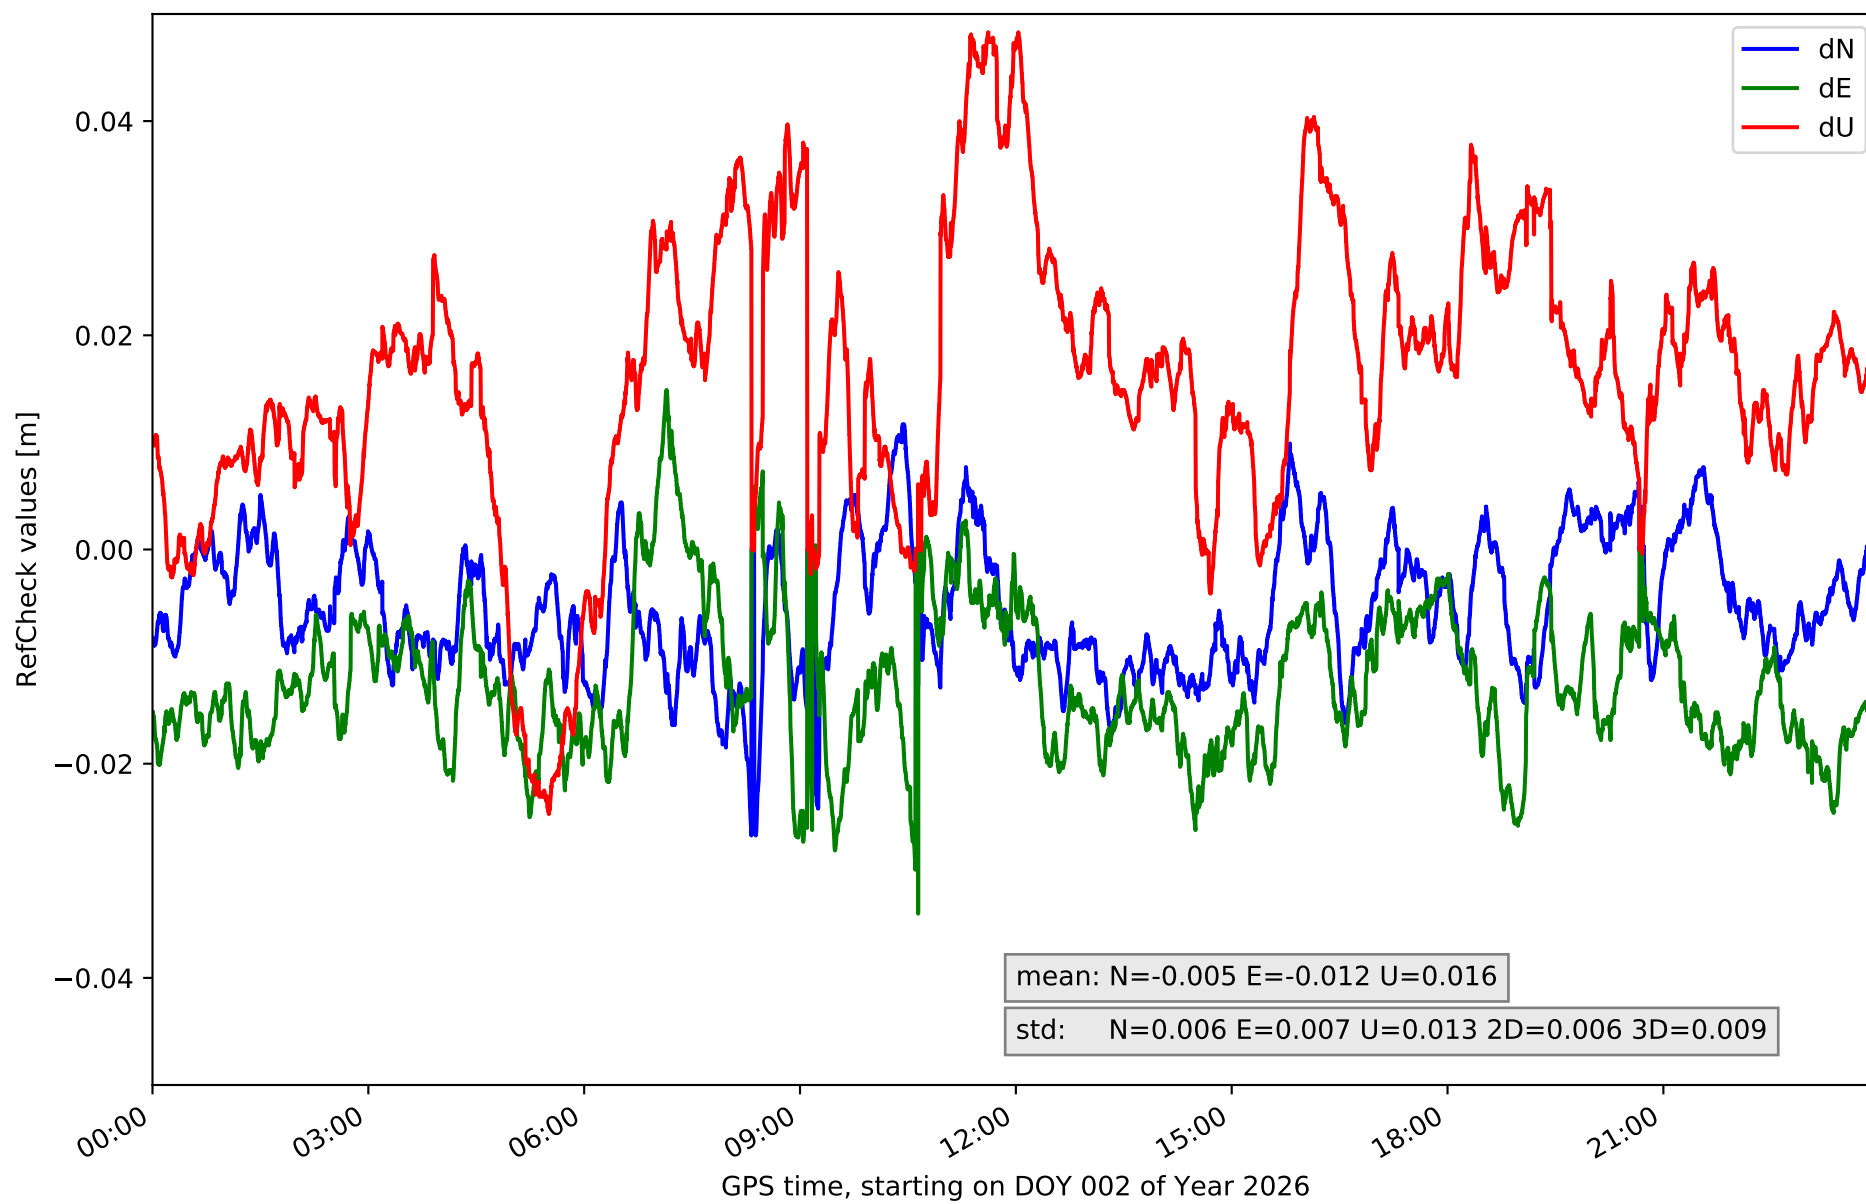


RefCheck for station TN03 in network N32T

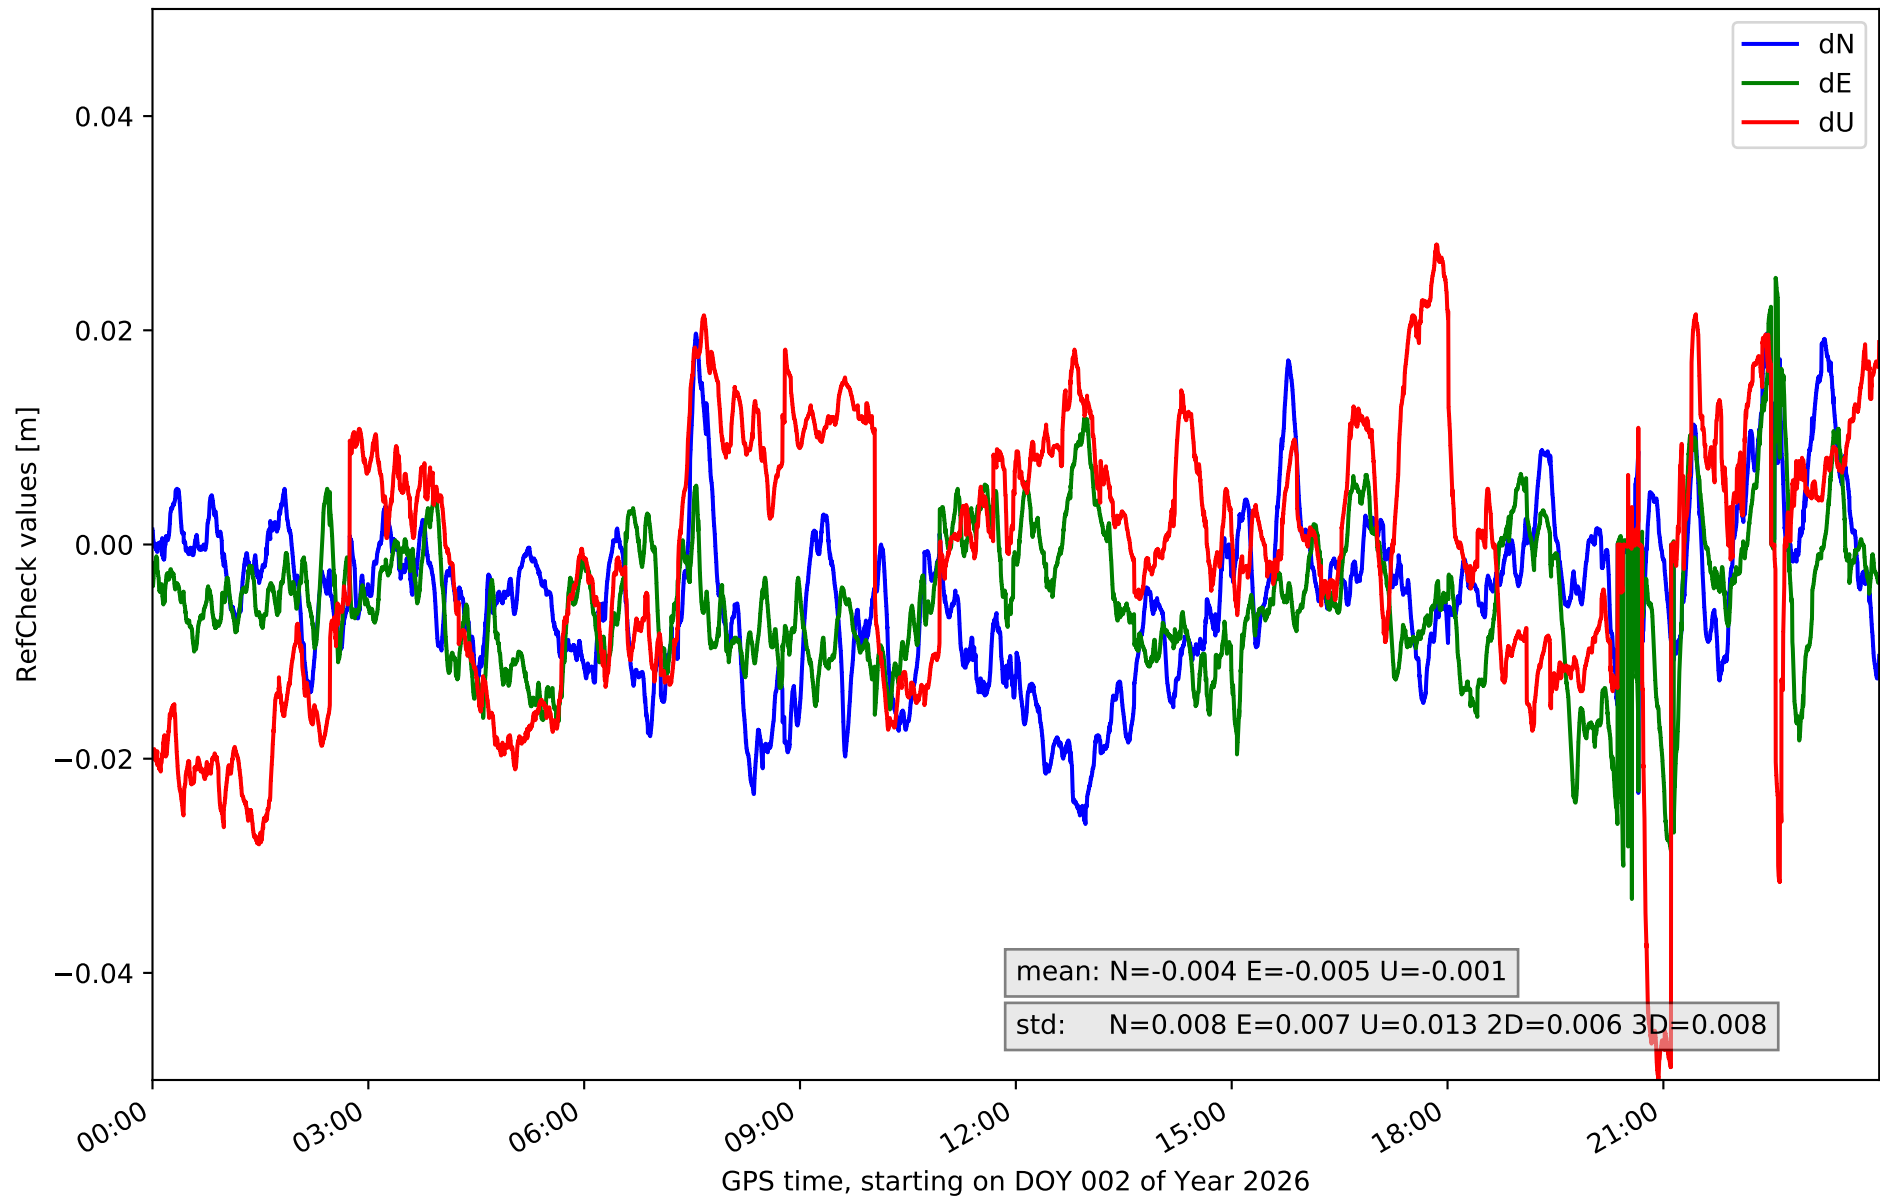


RefCheck for station TN06 in network N32T

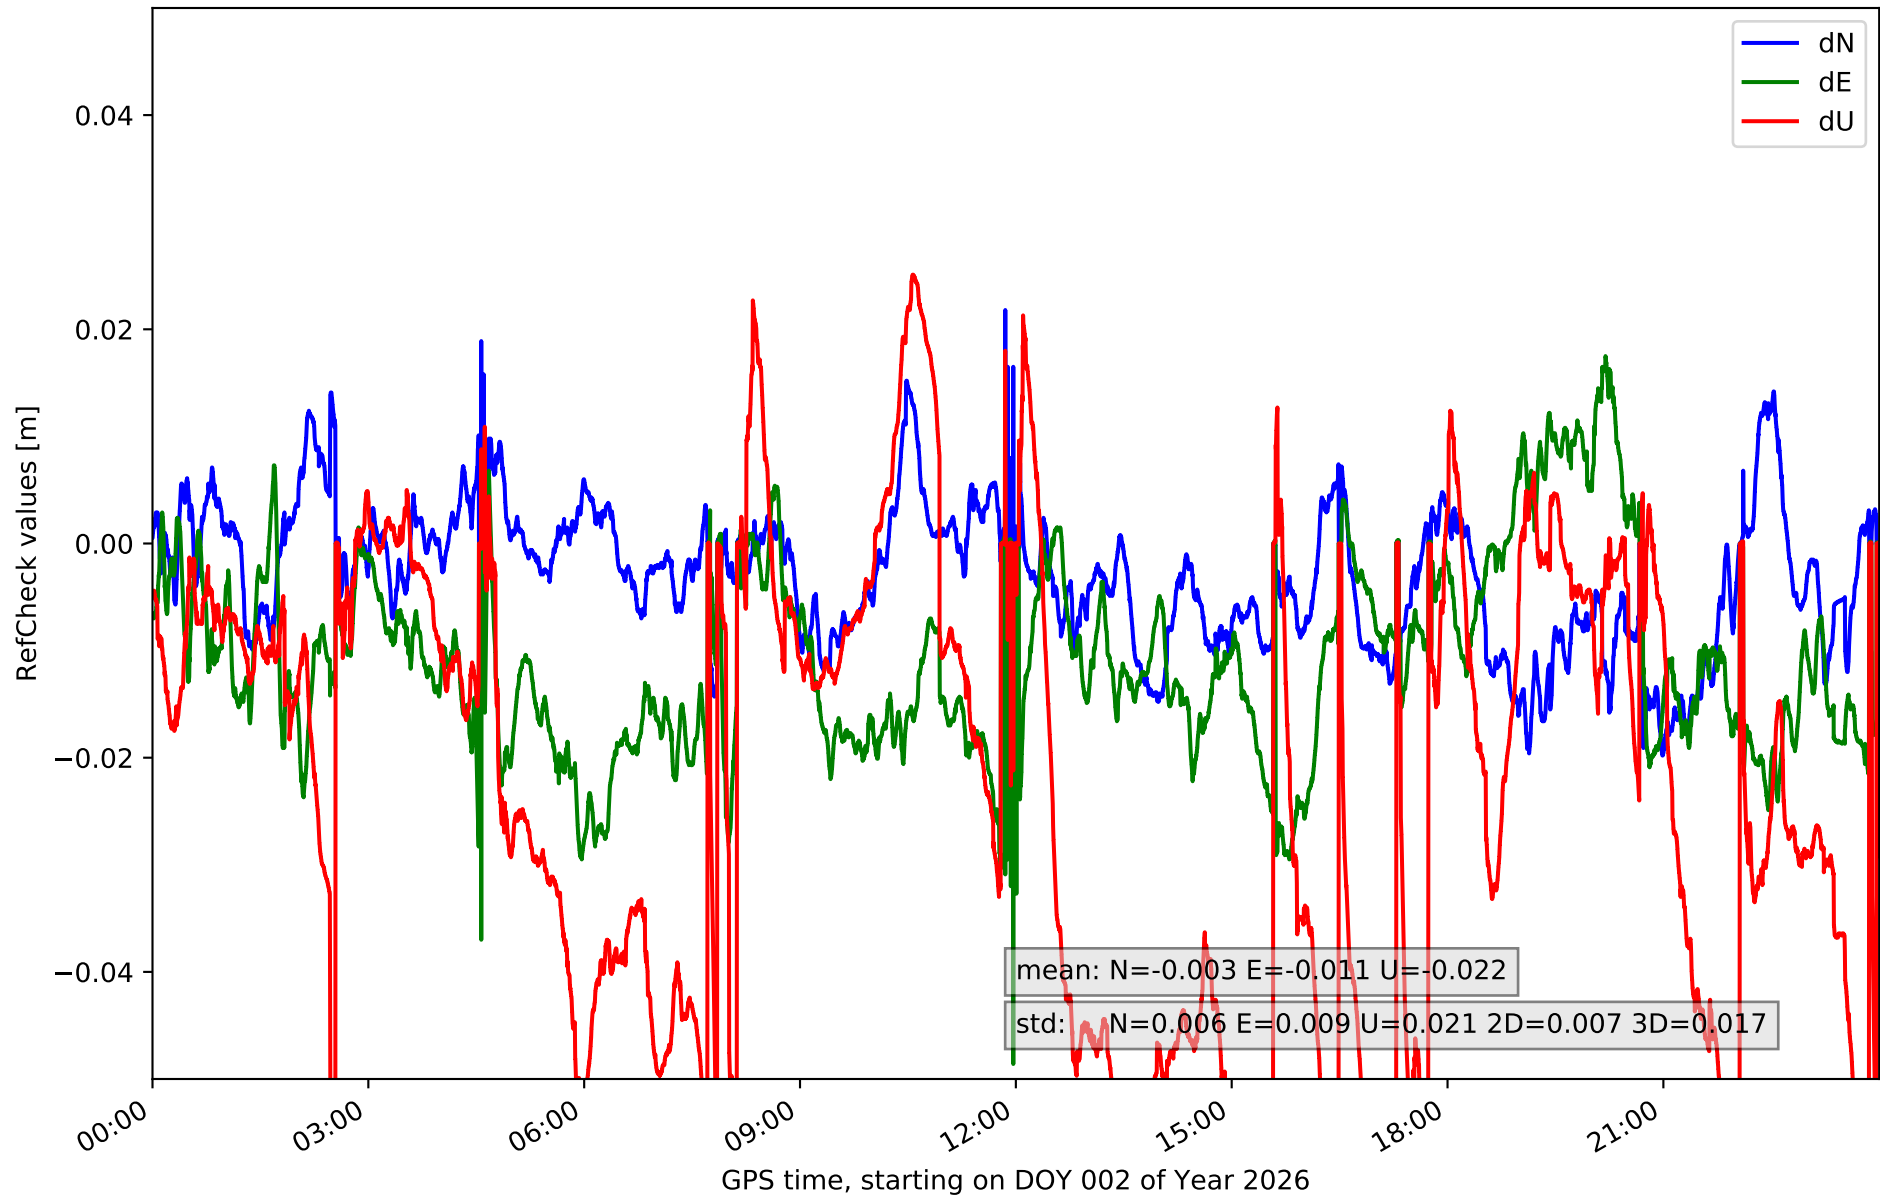

RefCheck for station TN09 in network N32T

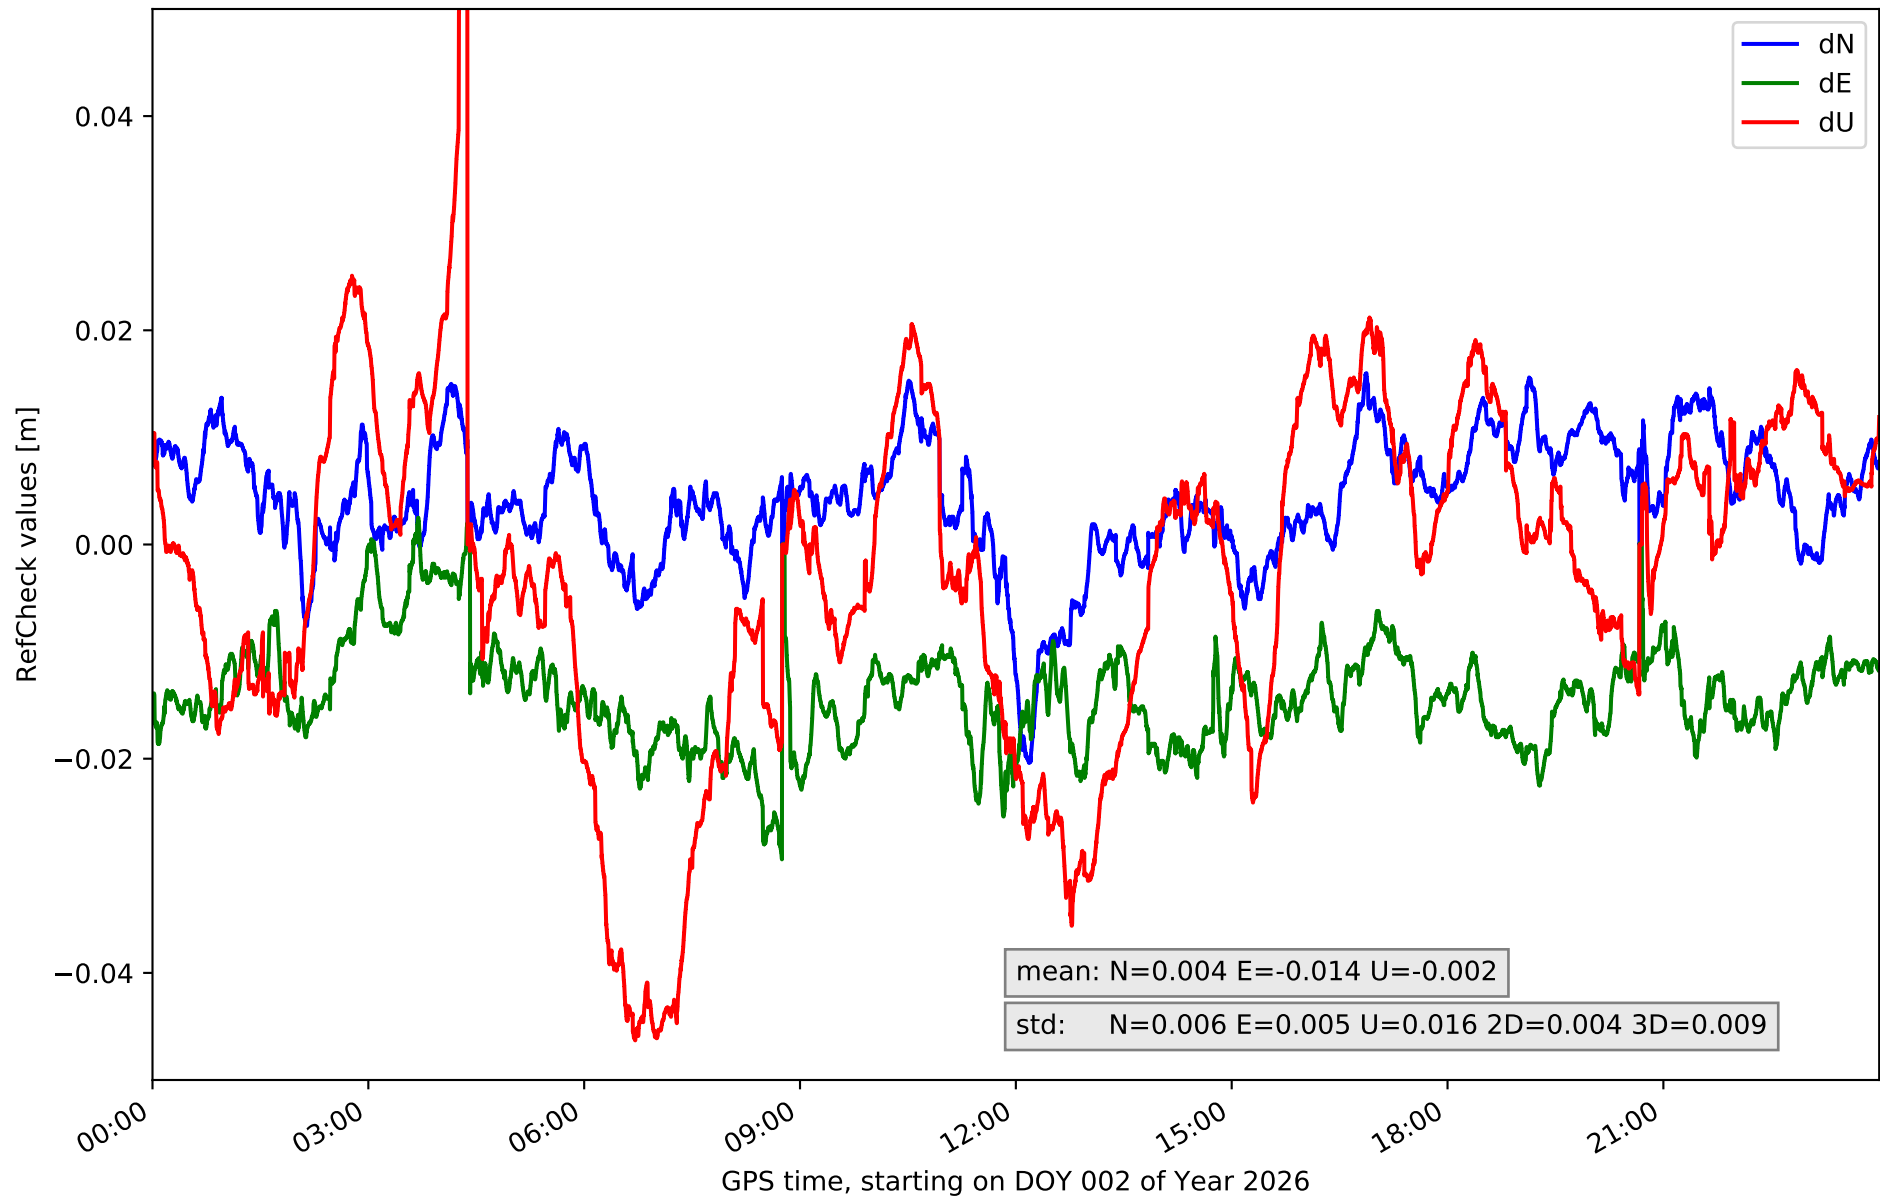

RefCheck for station TE11 in network N32T

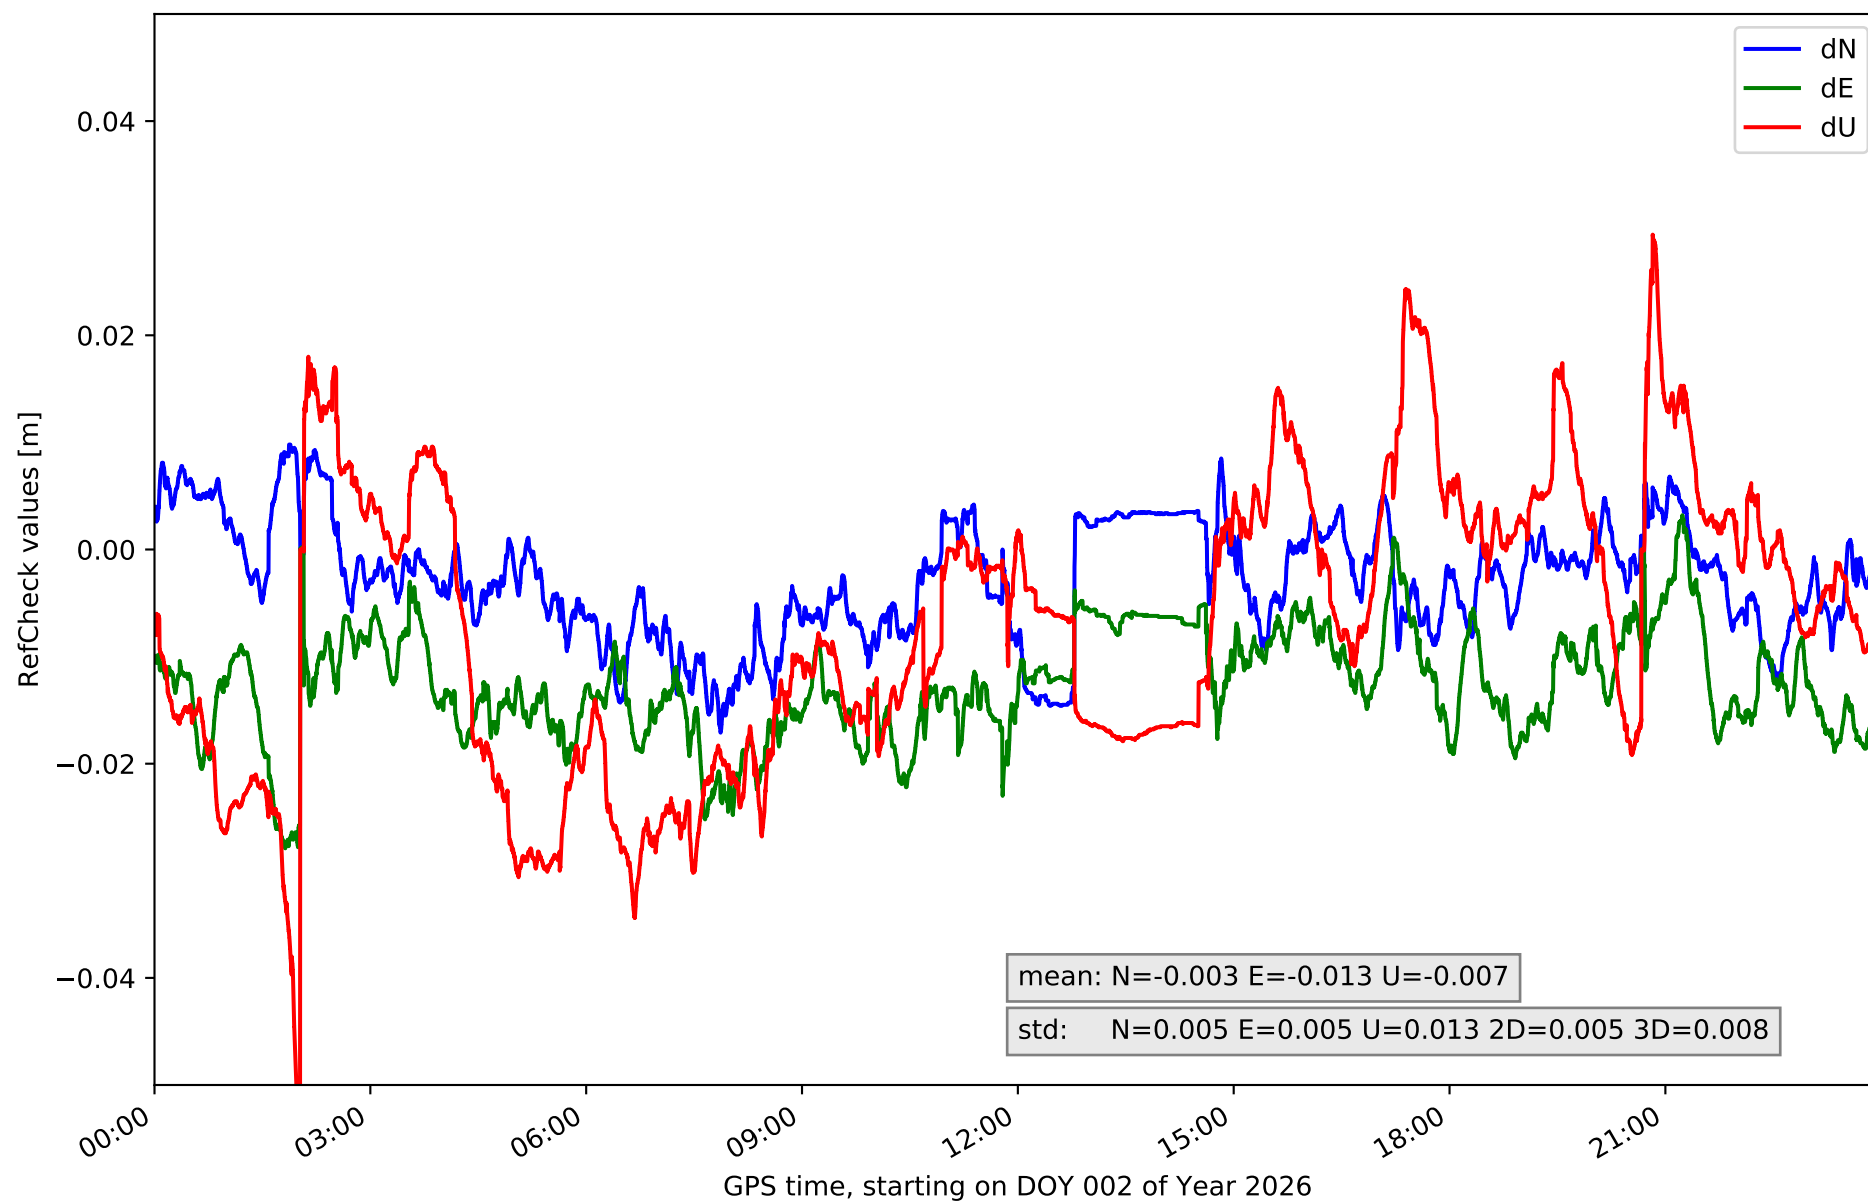

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.026	0.02	0.005	-0.01	0.029	0.007	-0.06	0.06	0.017	0.006	0.011	51640	72.1	50311	70.3
EH02	-0.006	0.049	0.006	-0.027	0.035	0.009	-0.062	0.06	0.022	0.008	0.016	61678	86.2	55859	78.0
GOM1	-0.02	0.017	0.007	-0.029	0.028	0.011	-0.033	0.059	0.018	0.006	0.01	51066	71.3	33832	47.3
GOME	-0.016	0.025	0.006	-0.026	0.025	0.01	-0.016	0.04	0.011	0.006	0.008	38153	53.3	22380	31.3
IZAN	-0.021	0.001	0.004	-0.024	0.01	0.005	-0.025	0.013	0.009	0.005	0.006	63821	89.2	28706	40.1
LP01	-0.03	0.001	0.005	-0.007	0.024	0.005	-0.022	0.036	0.012	0.005	0.007	69439	97.0	49332	68.9
LP03	-0.019	0.019	0.005	-0.018	0.009	0.004	-0.041	0.038	0.014	0.004	0.008	27152	37.9	21966	30.7
LPAL	-0.024	0.004	0.004	-0.022	0.011	0.004	-0.033	0.018	0.009	0.004	0.005	49414	69.0	9255	12.9
LRES	-0.013	0.022	0.005	-0.005	0.03	0.006	-0.054	0.058	0.02	0.006	0.009	61188	85.5	59270	82.8
TN01	-0.044	0.027	0.008	-0.042	0.017	0.008	-0.044	0.024	0.014	0.007	0.008	59133	82.6	48077	67.2
TN02	-0.027	0.012	0.006	-0.034	0.015	0.007	-0.025	0.048	0.013	0.006	0.009	54270	75.8	52068	72.7
TN03	-0.026	0.02	0.008	-0.033	0.025	0.007	-0.05	0.028	0.013	0.006	0.008	39666	55.4	21332	29.8
TN06	-0.02	0.022	0.006	-0.049	0.018	0.009	-0.064	0.025	0.021	0.007	0.017	52383	73.2	45113	63.0
TN09	-0.02	0.016	0.006	-0.029	0.003	0.005	-0.046	0.06	0.016	0.004	0.009	66330	92.7	35780	50.0
TE11	-0.017	0.01	0.005	-0.028	0.003	0.005	-0.06	0.029	0.013	0.005	0.008	54576	76.2	27535	38.5
Mean	-0.022	0.018	0.006	-0.026	0.019	0.007	-0.042	0.04	0.015	0.006	0.009	53327.3	74.5	37387.7	52.2
Min/Max	-0.044	0.049	0.008	-0.049	0.035	0.011	-0.064	0.06	0.022	0.008	0.017	69439	97.0	59270	82.8

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	87.6	90.4	75.5	93.2	86.6
considering satellites with dual-frequency fixed	80.9	83.6	65.7	86.8	81.4
considering all signals separately	81.9	83.6	65.7	87.4	81.1