

summary for network N32T

timeperiod chosen: from 2026-08-07-00:00:00 until 2026-08-07-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.4 seconds


average fixing percentage with threshold set to 0.3: 93.9 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

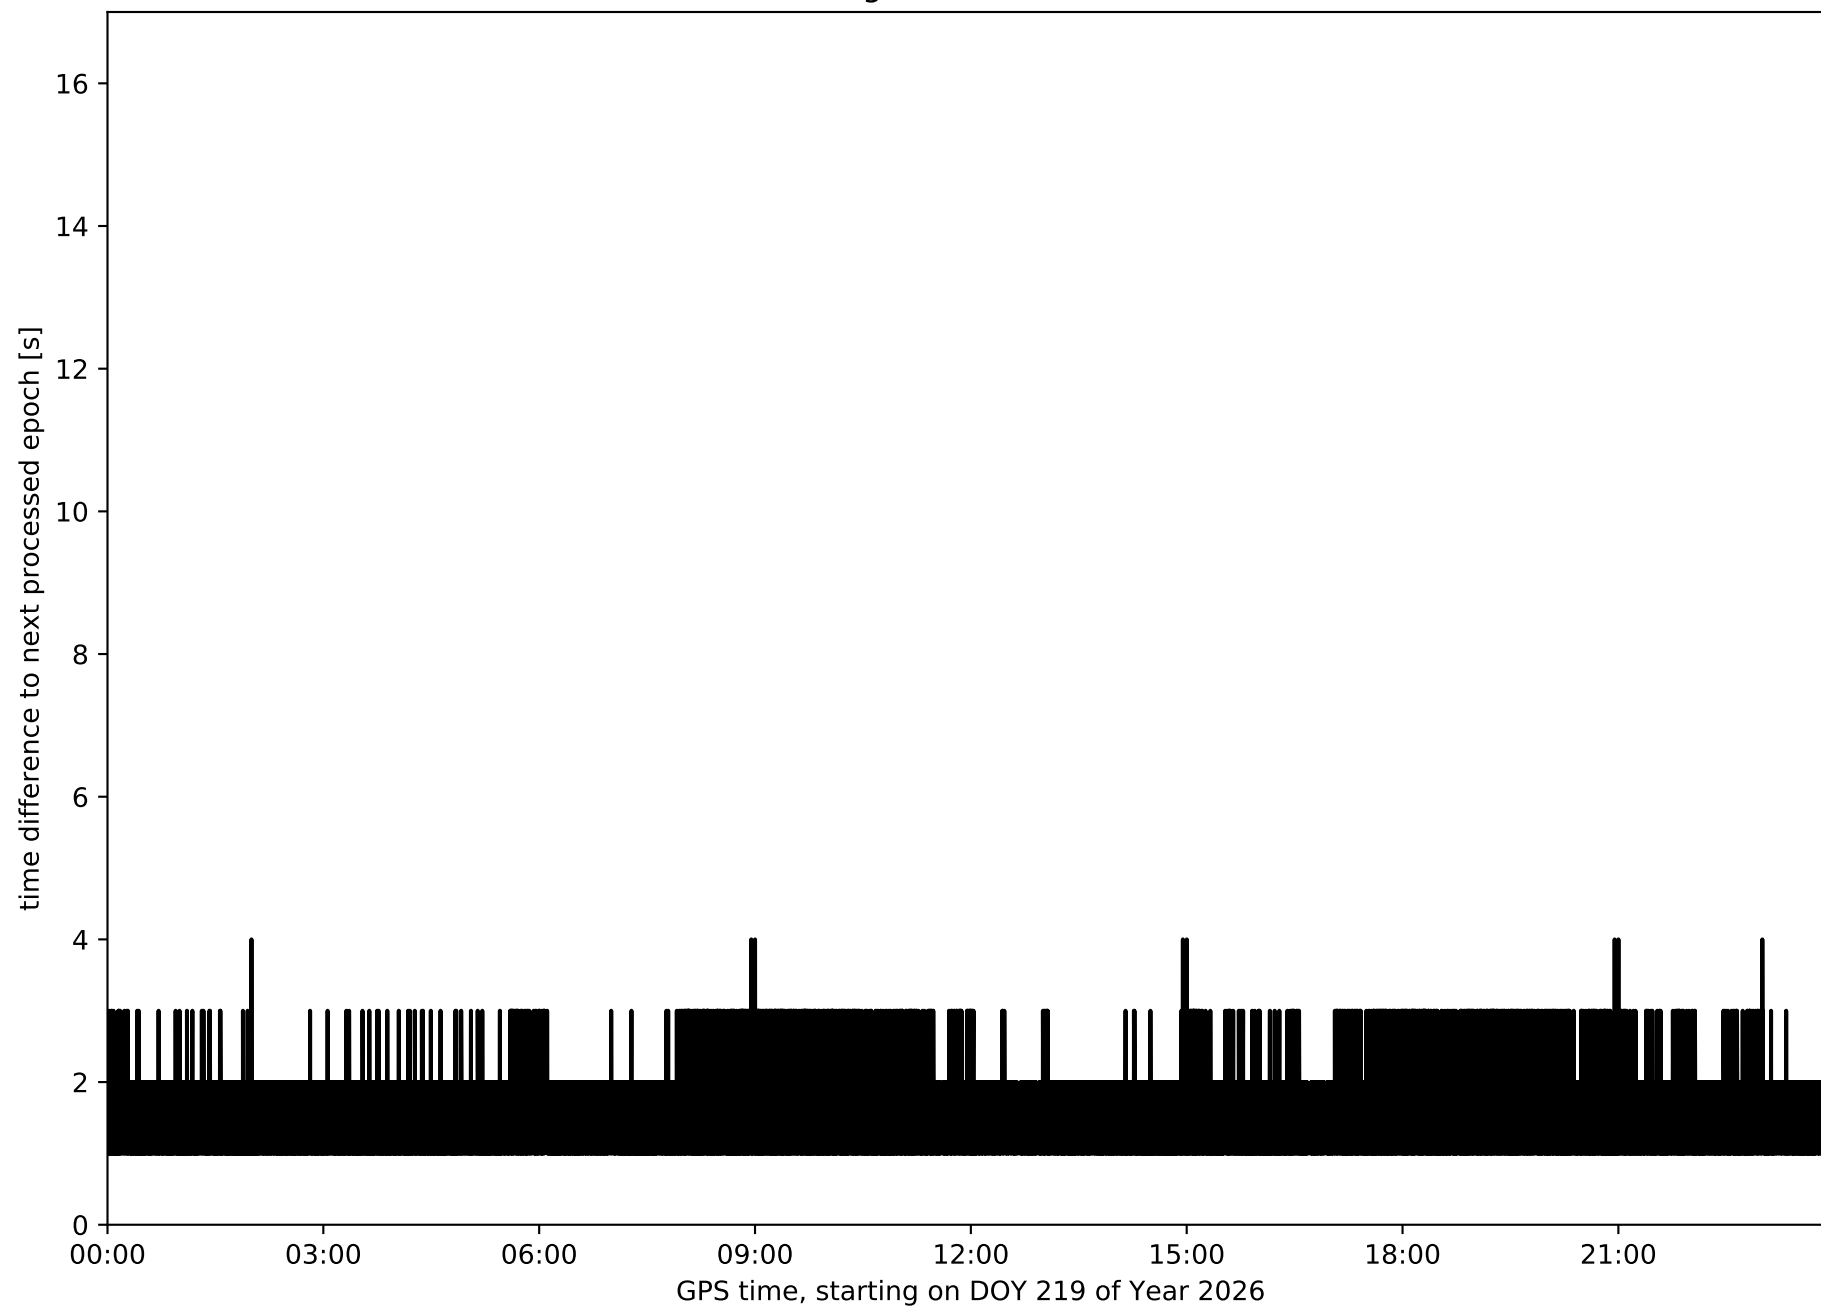


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

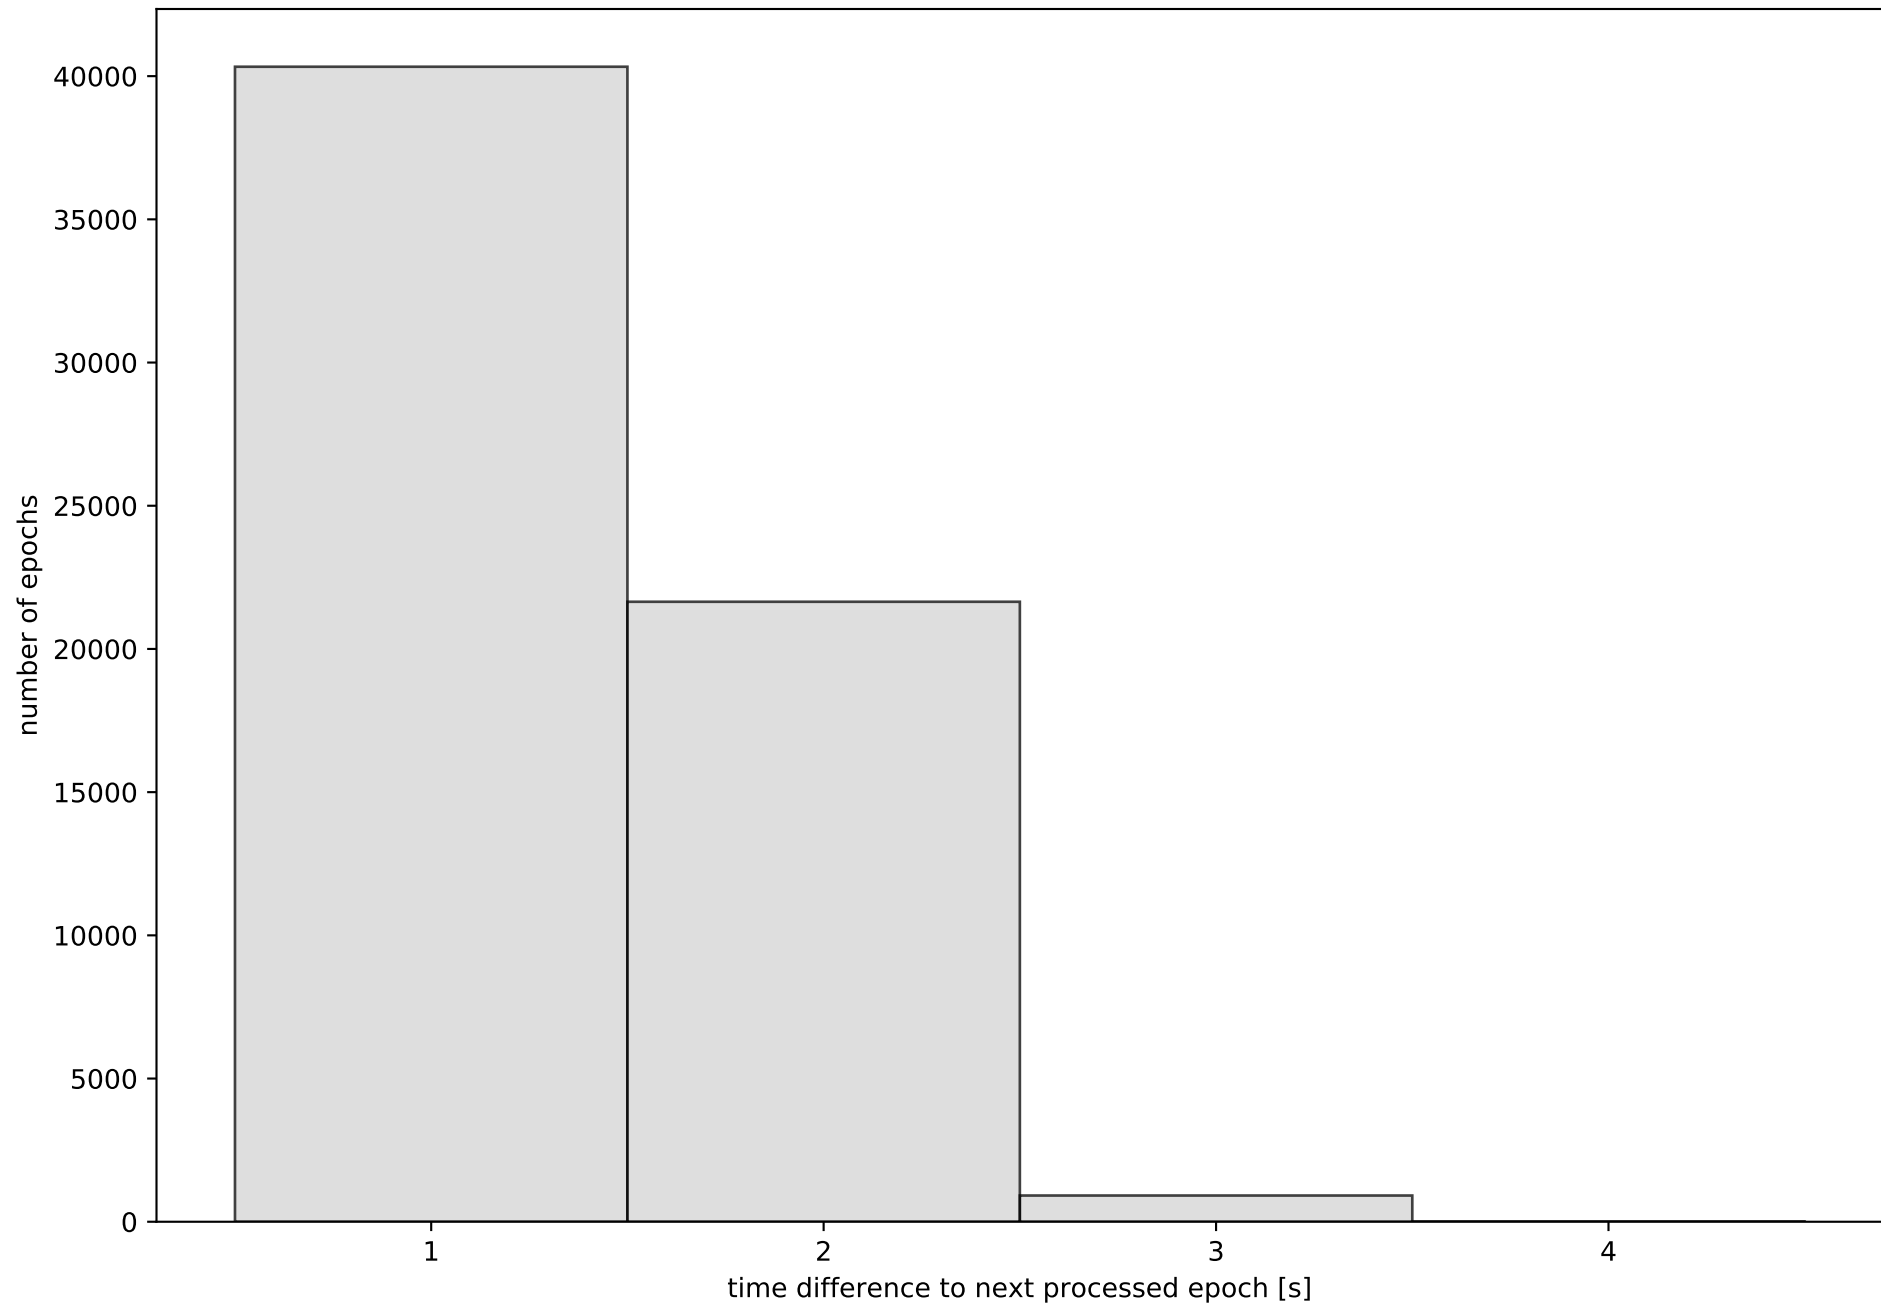


Network N32T with threshold set to 0.3

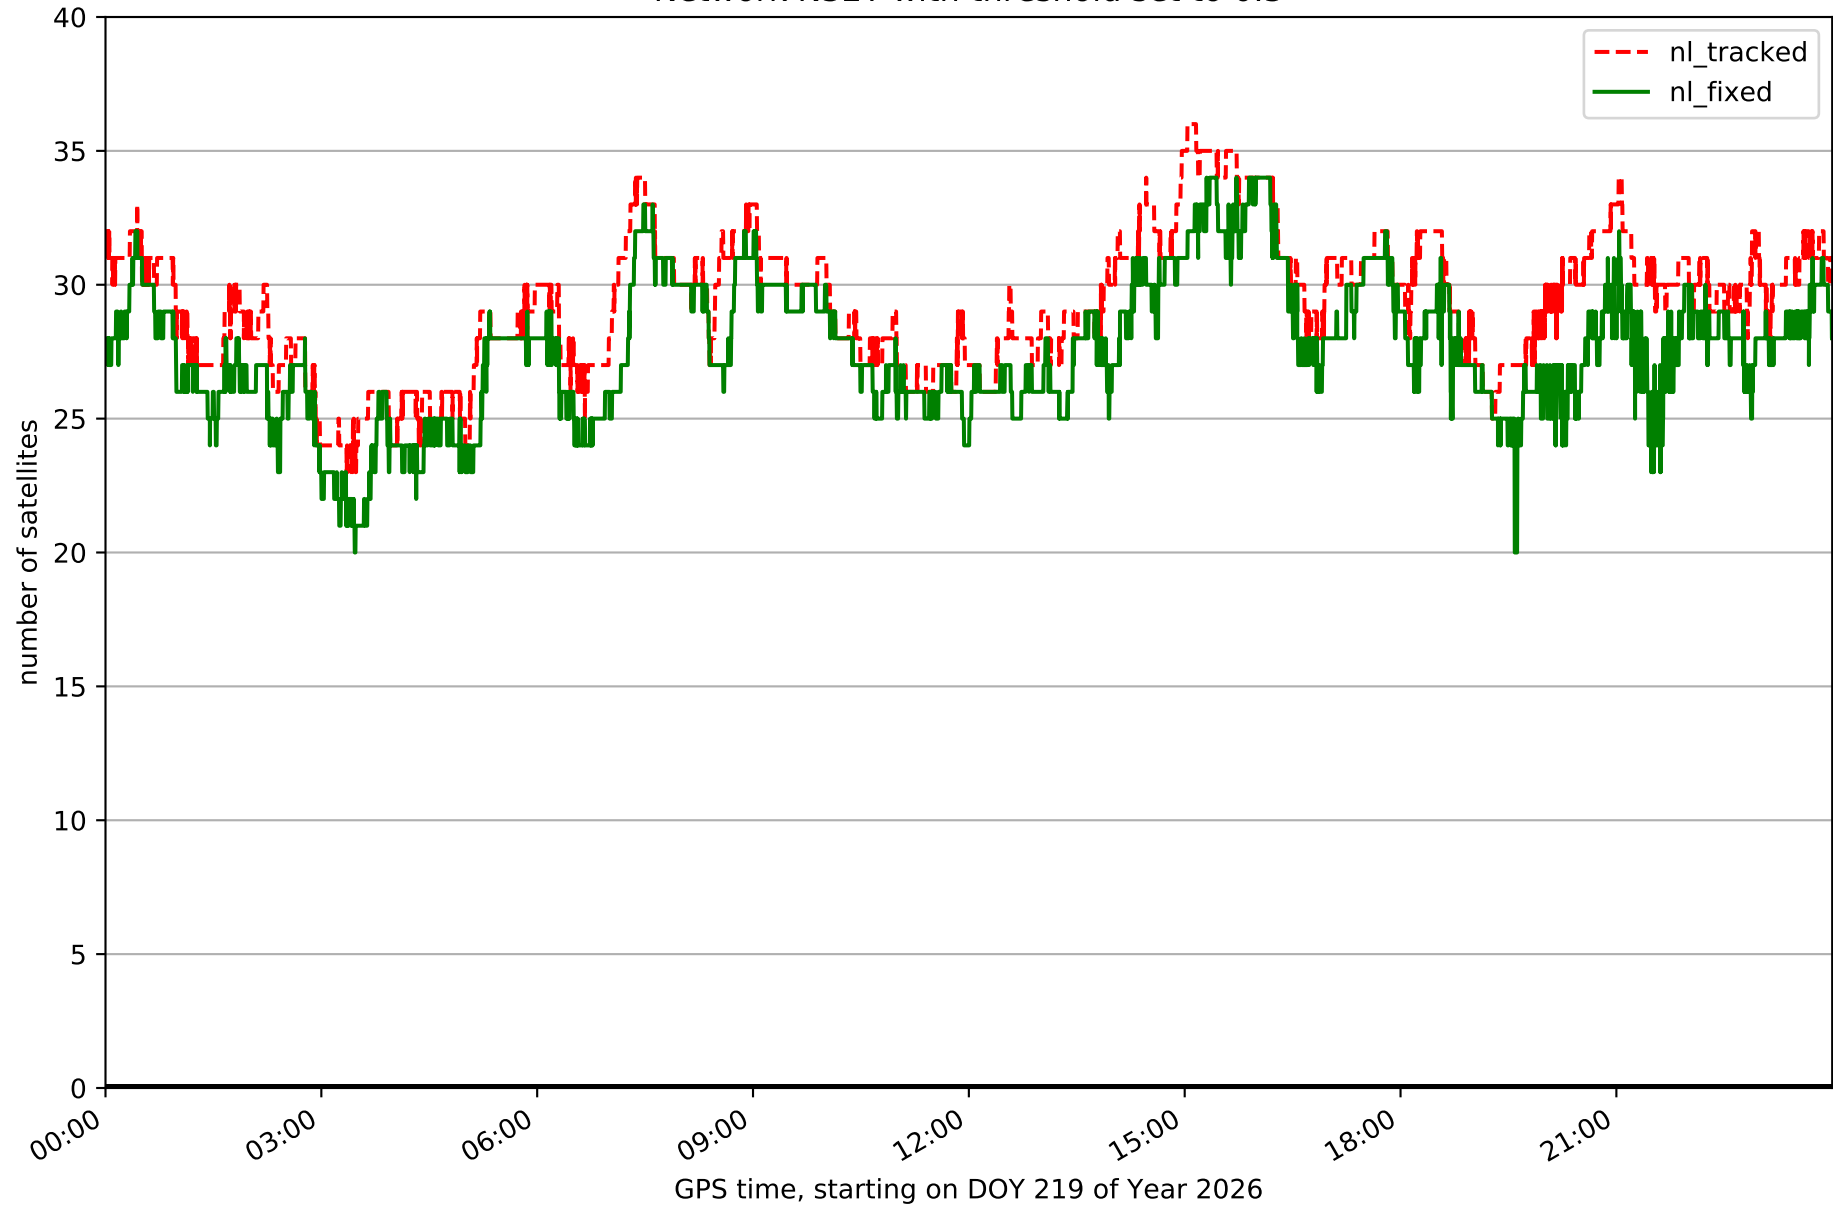


Fixing percentage of satellites in network N32T with threshold set to 0.3

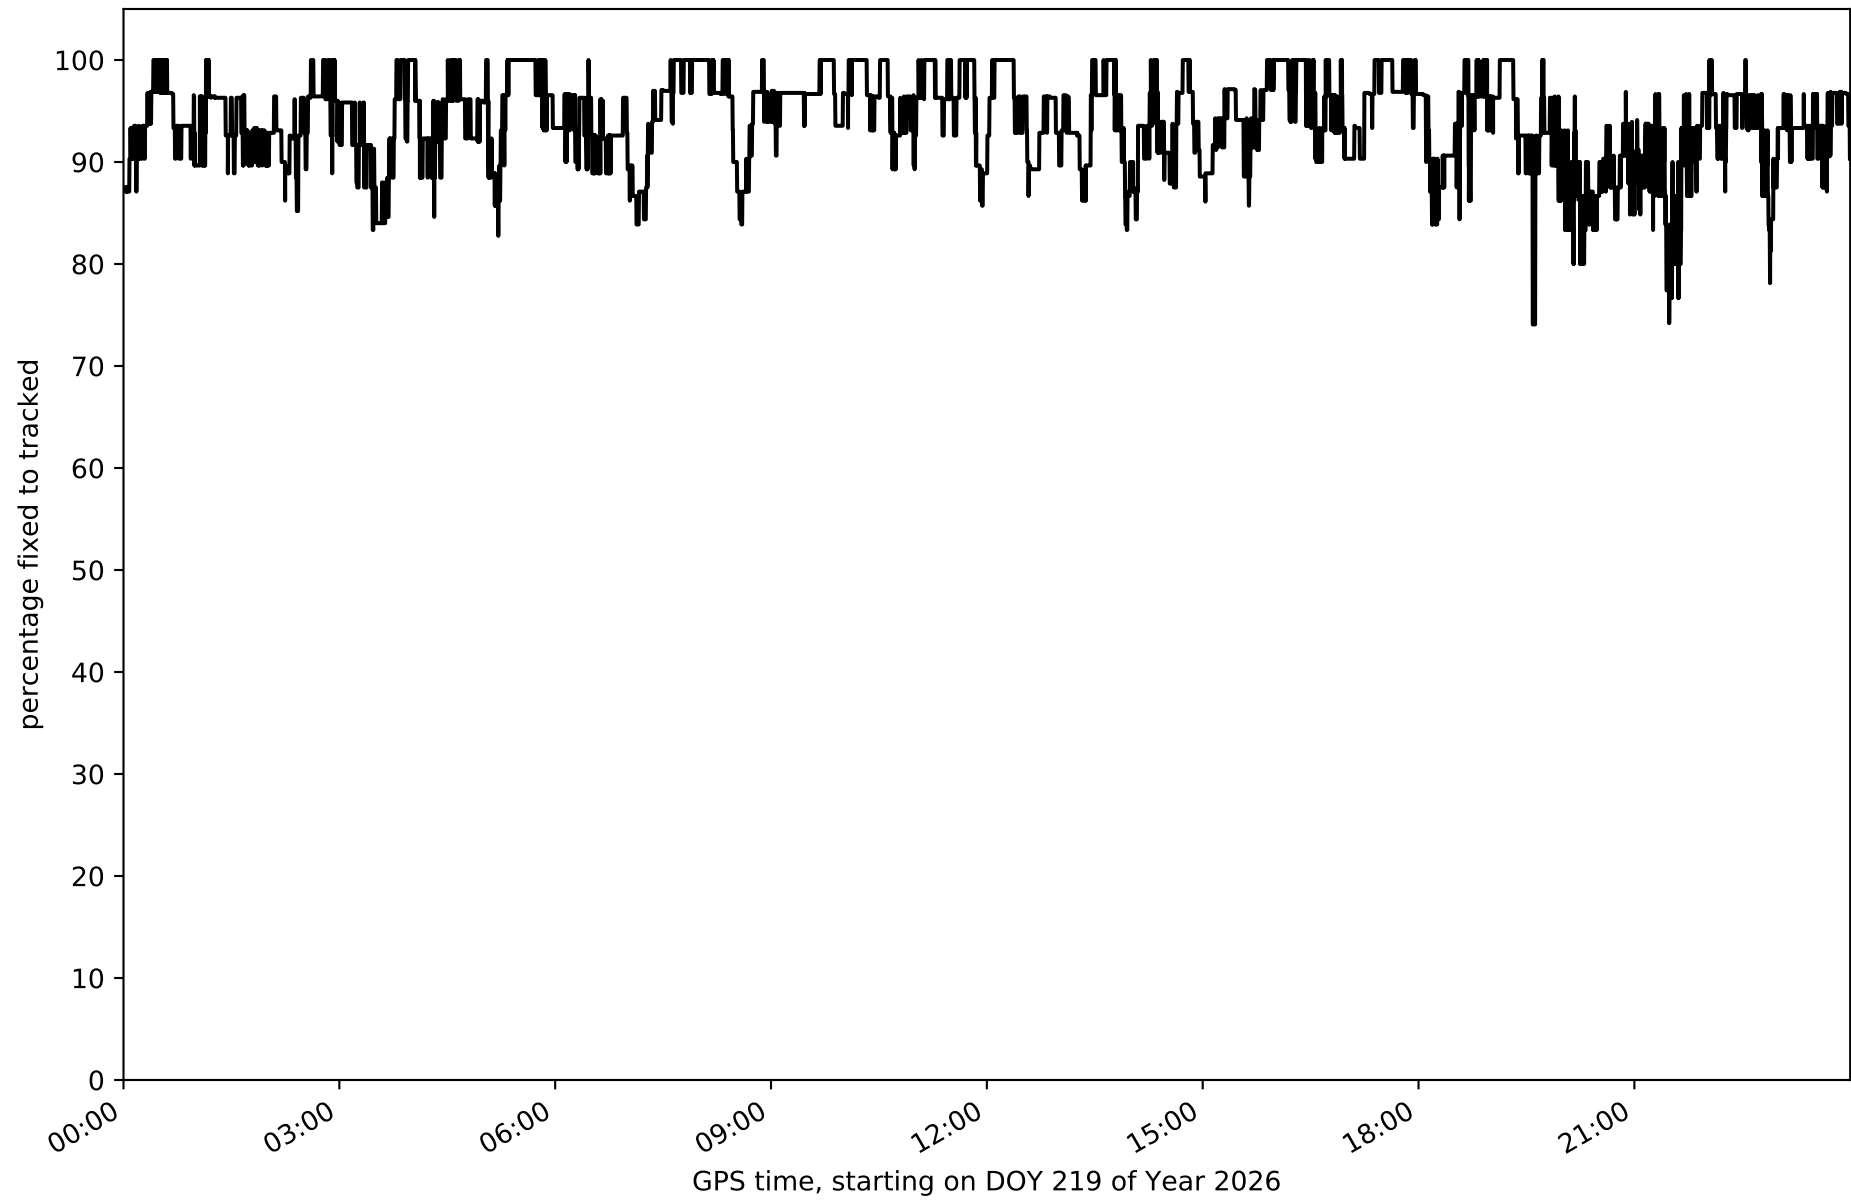


Network N32T - only GPS with threshold set to 0.3

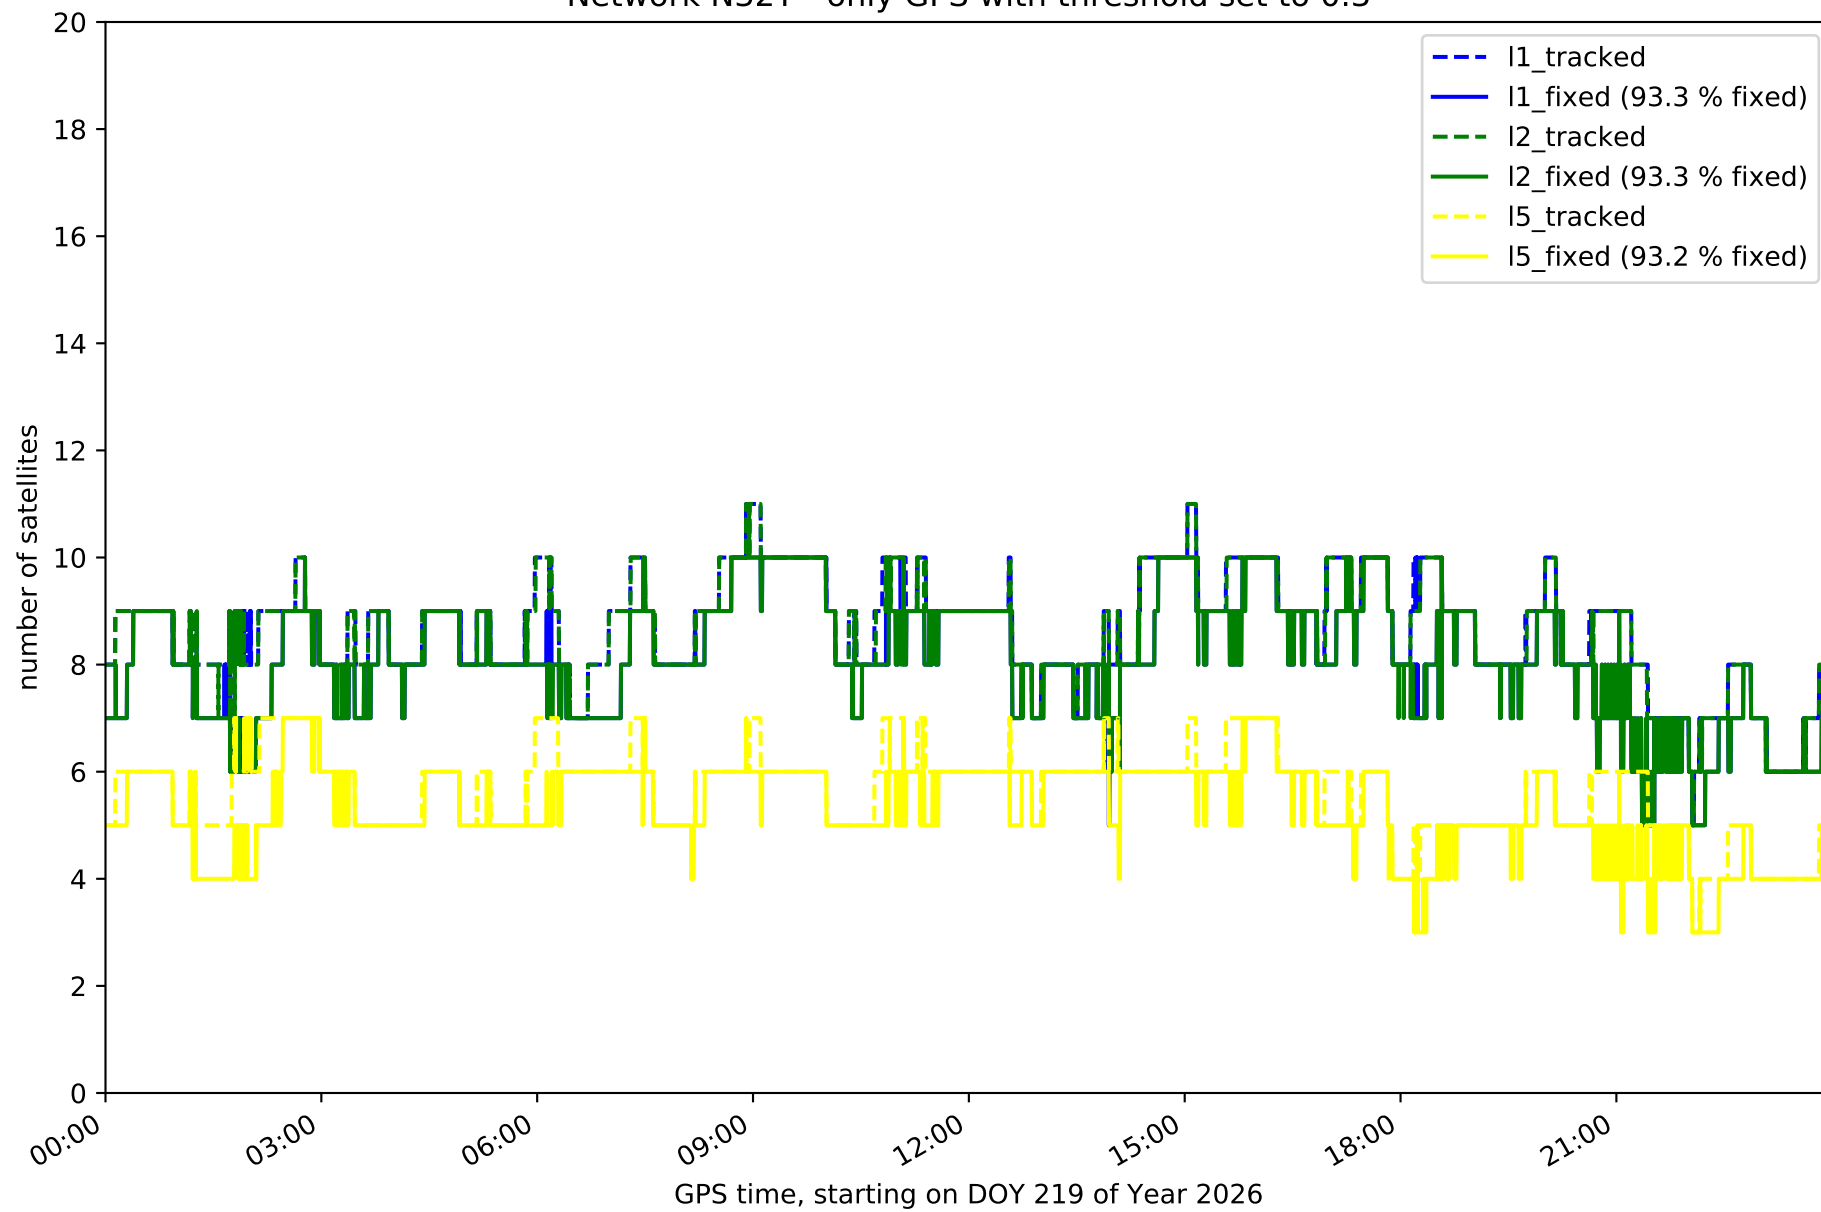


Network N32T - only GLONASS with threshold set to 0.3

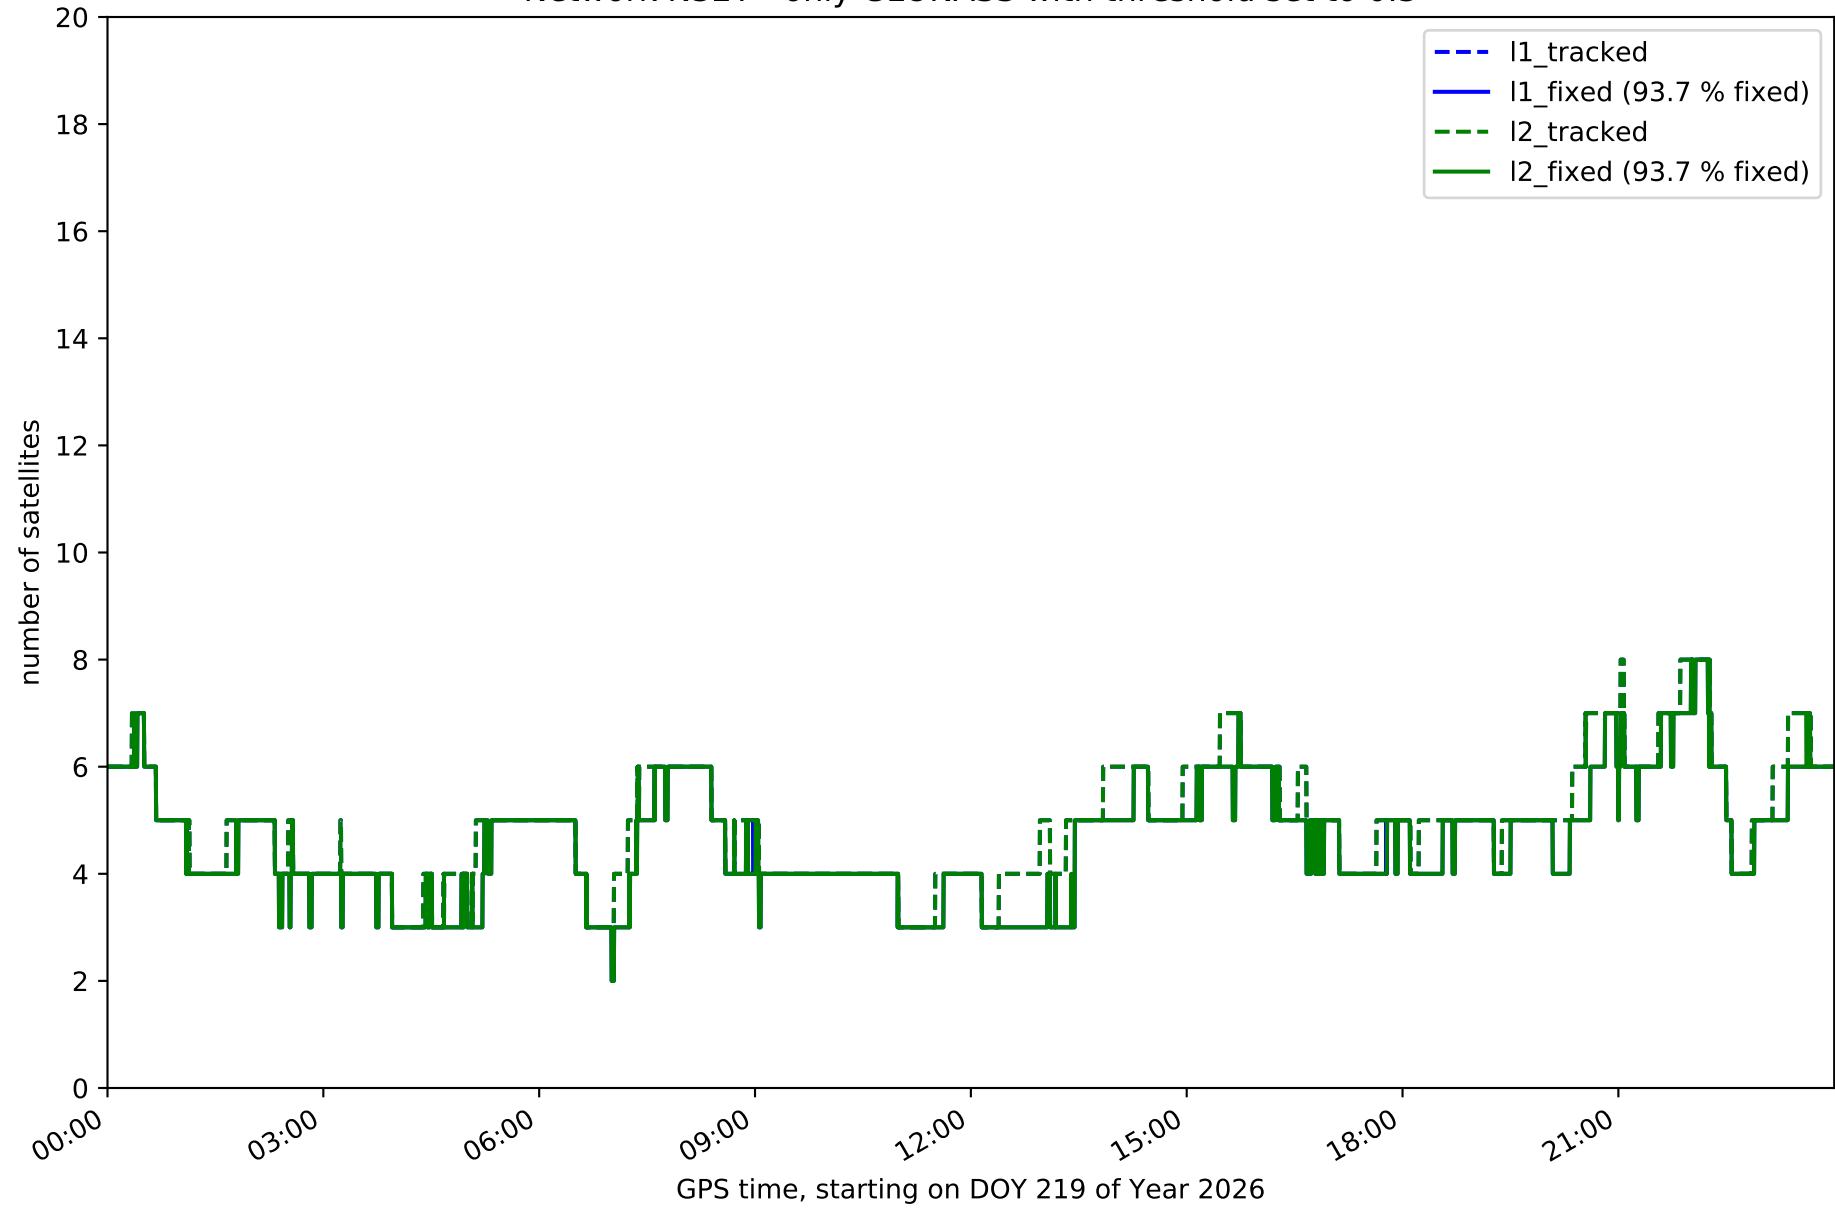


Network N32T - only BDS with threshold set to 0.3

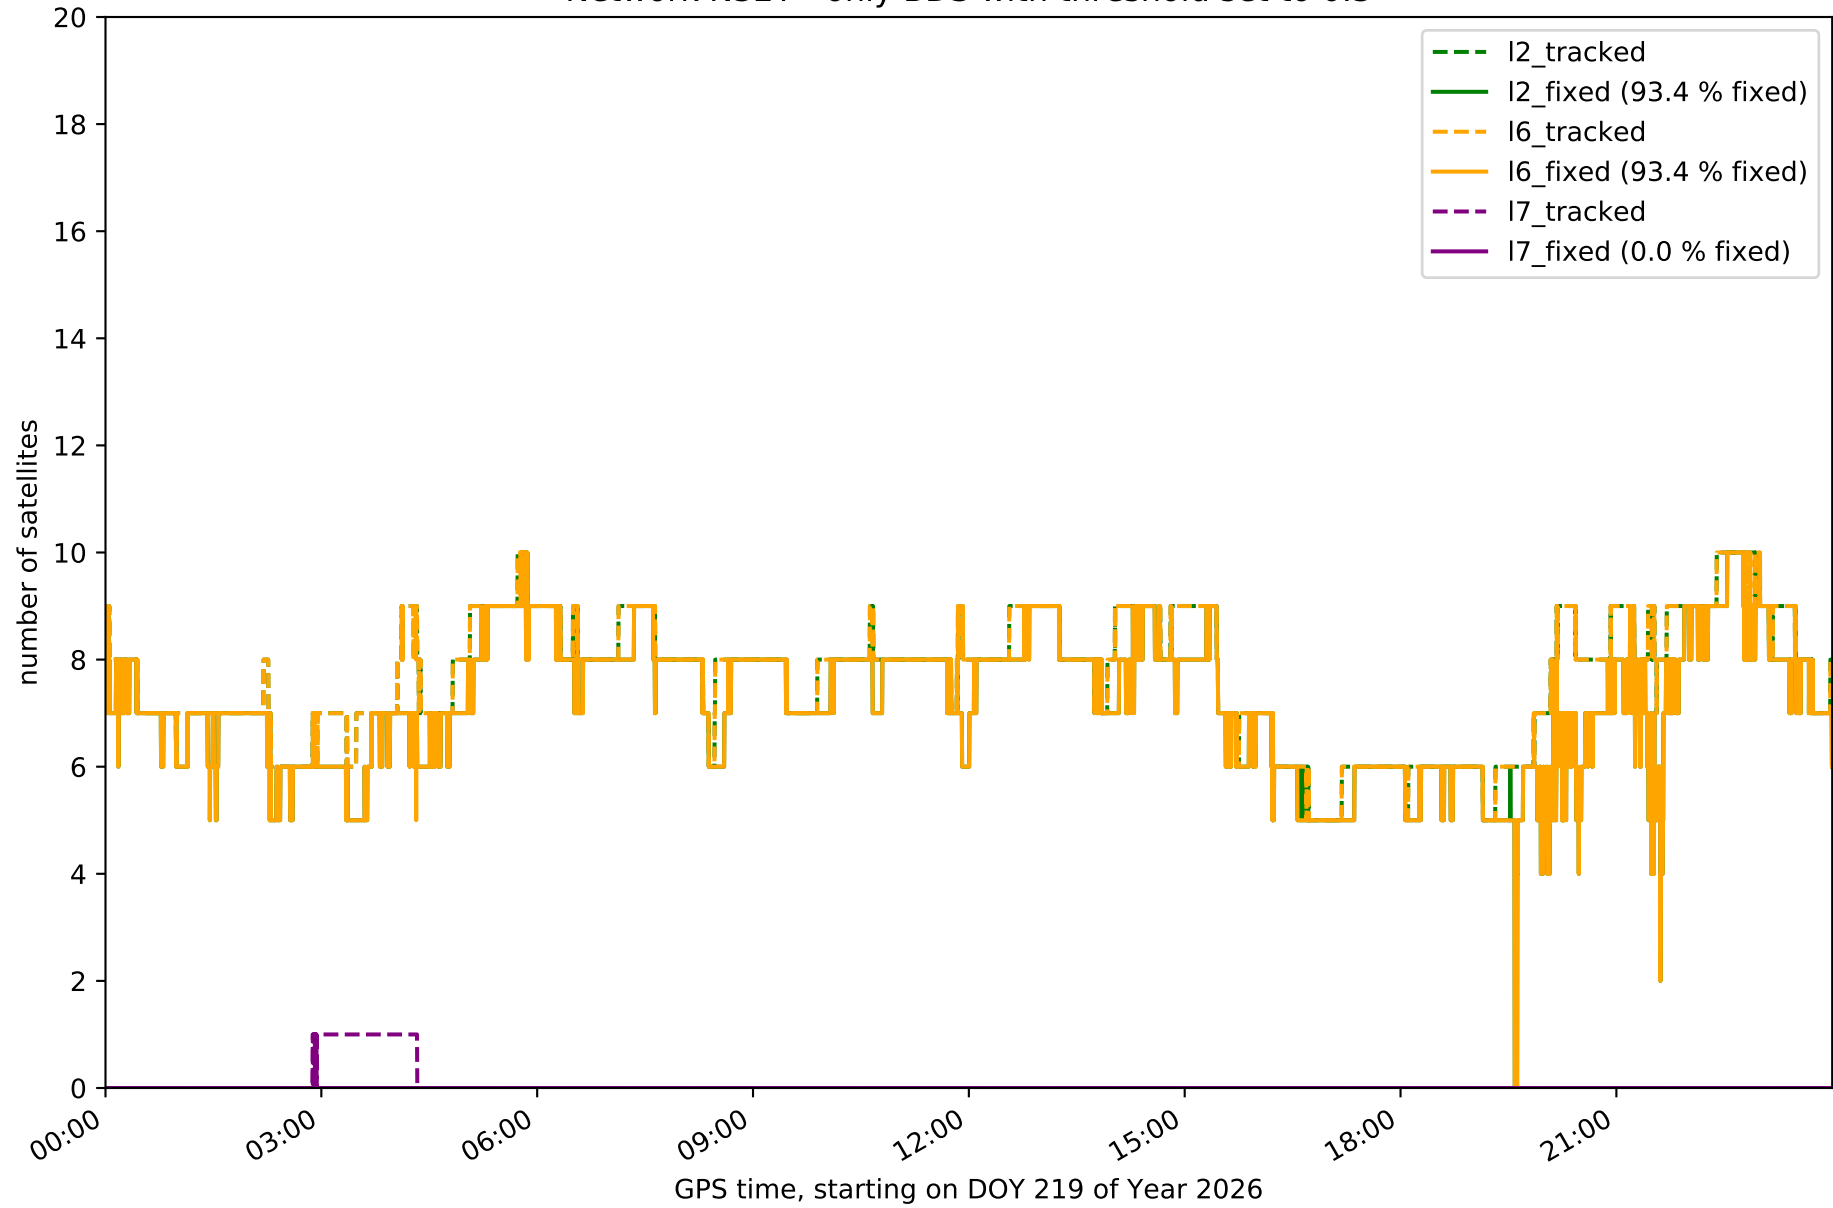


Network N32T - only Galileo with threshold set to 0.3

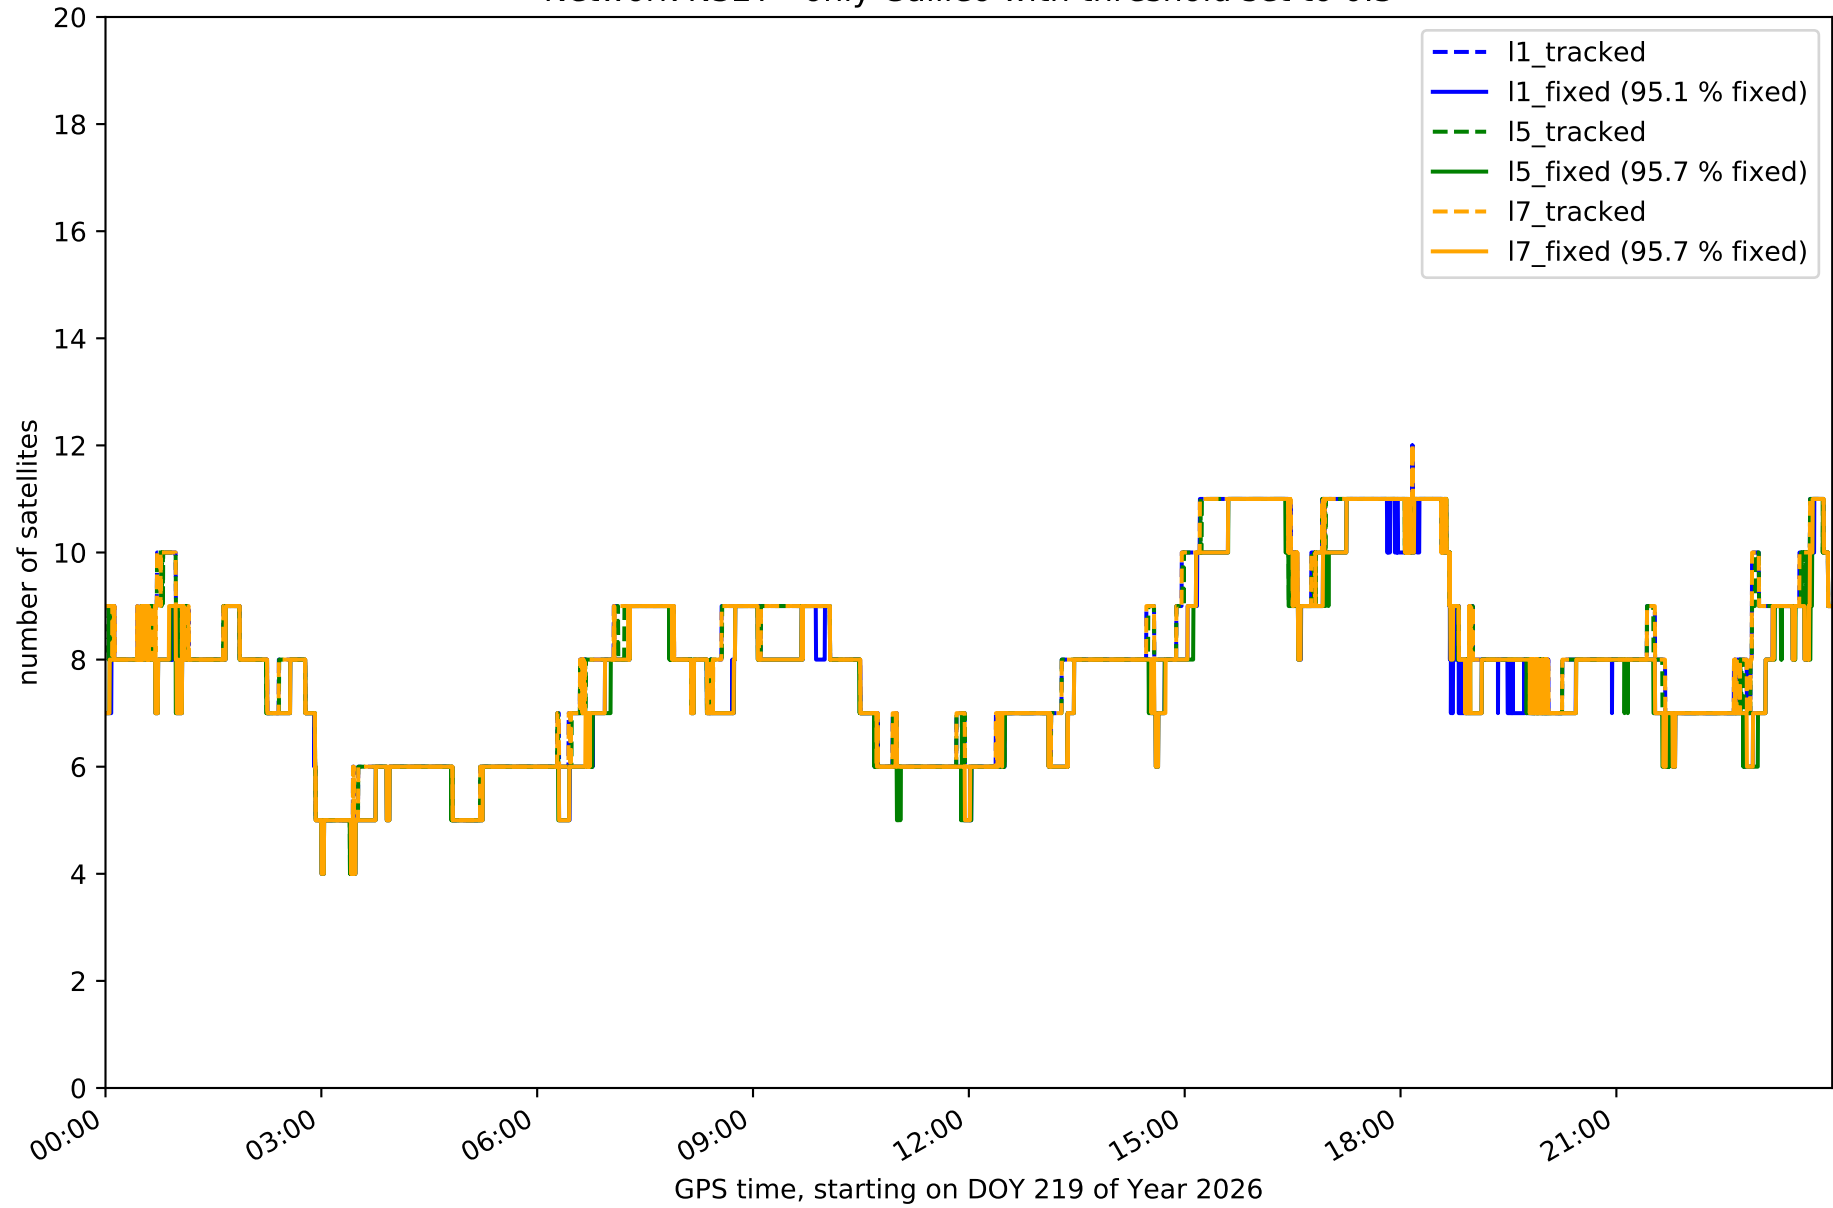


Station EH01 in network N32T

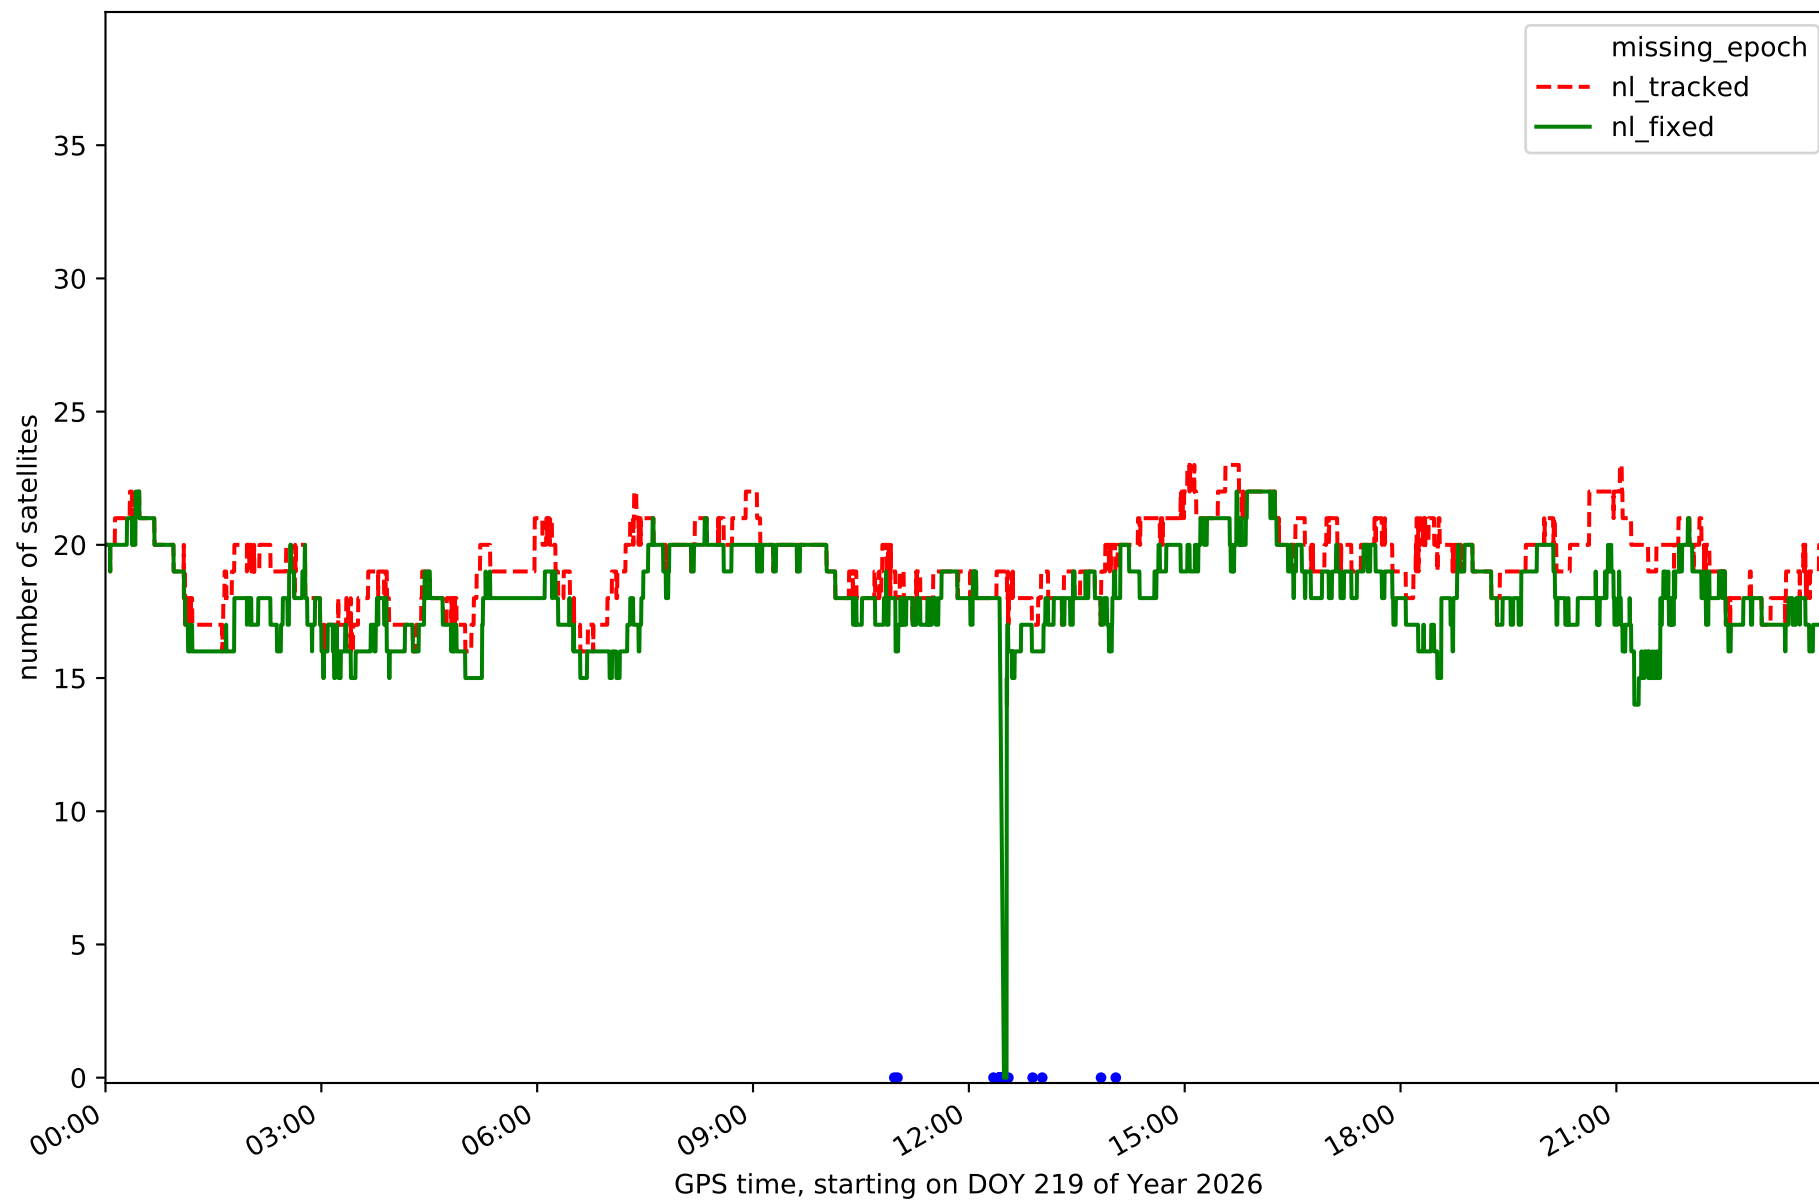


Station EH02 in network N32T

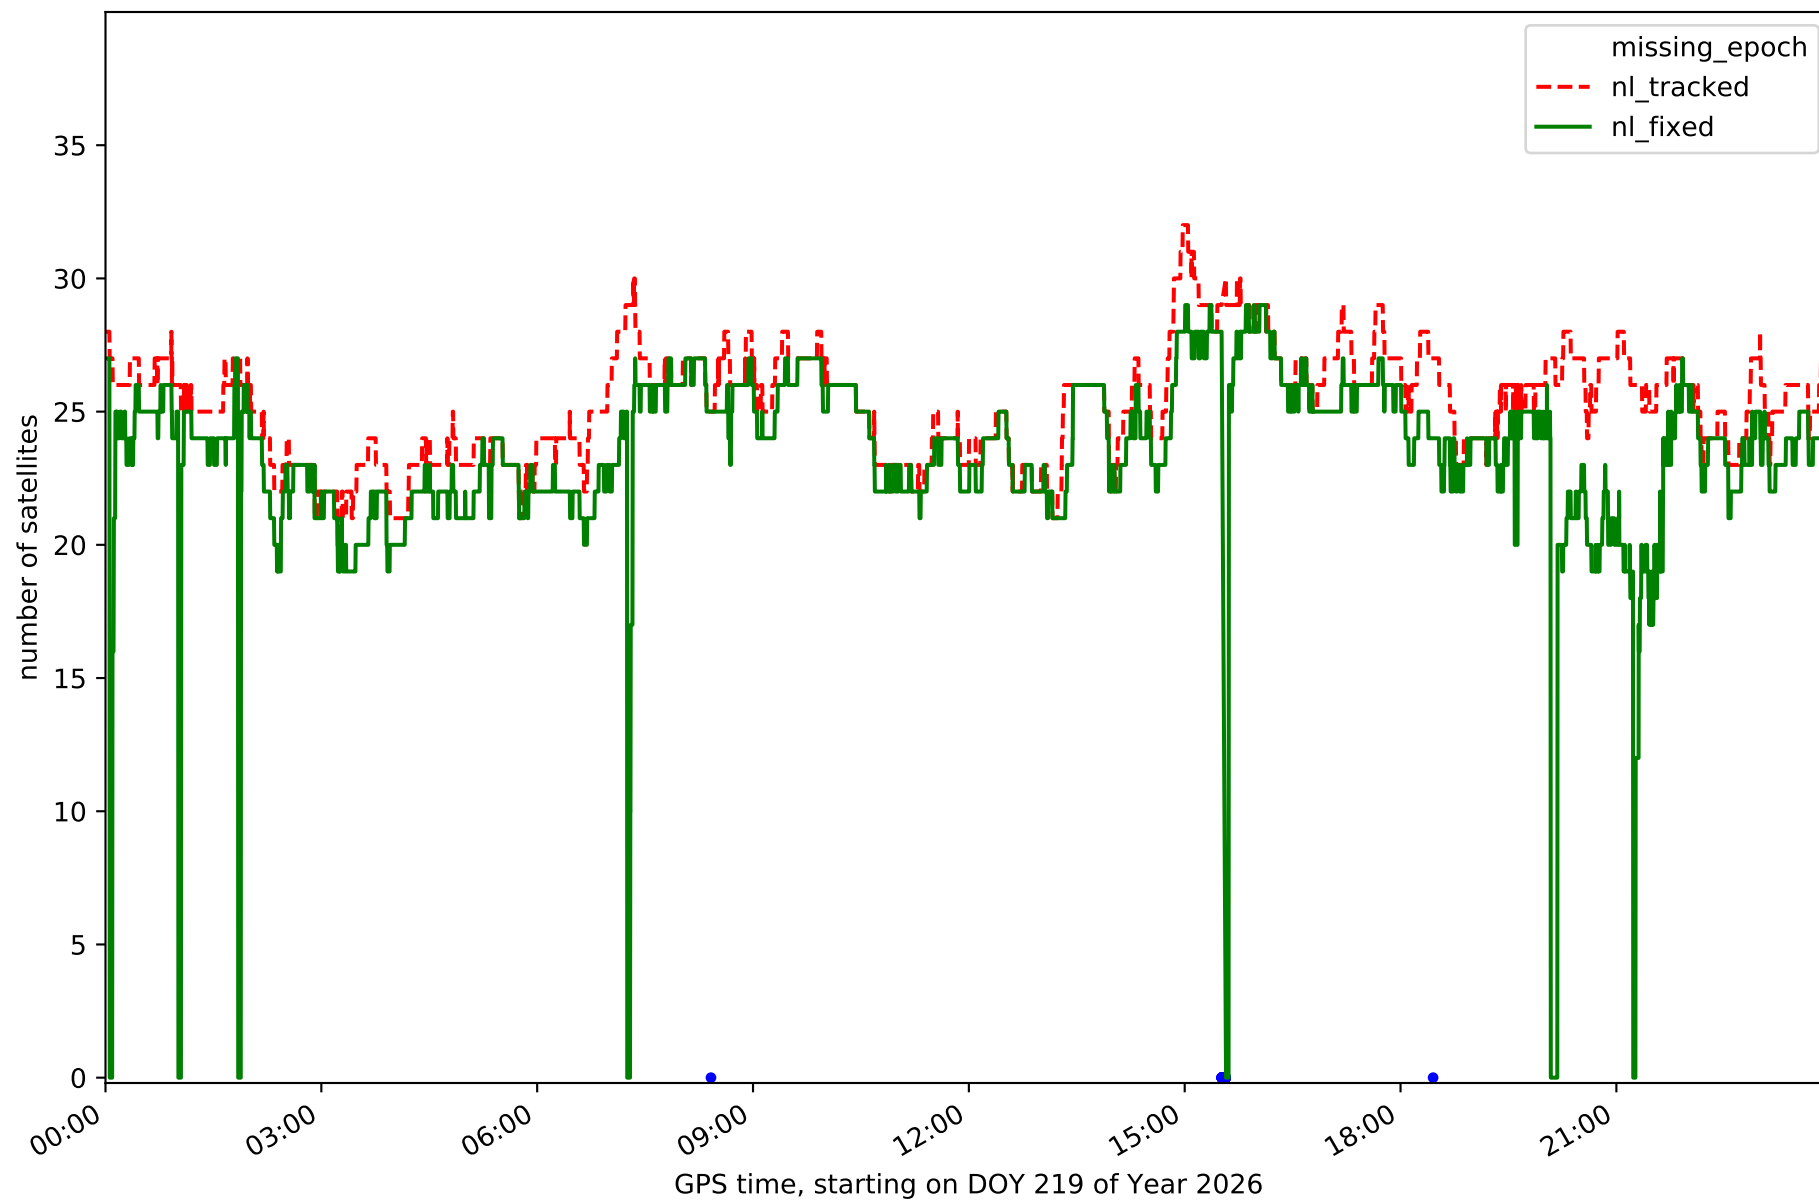


Station GOM1 in network N32T

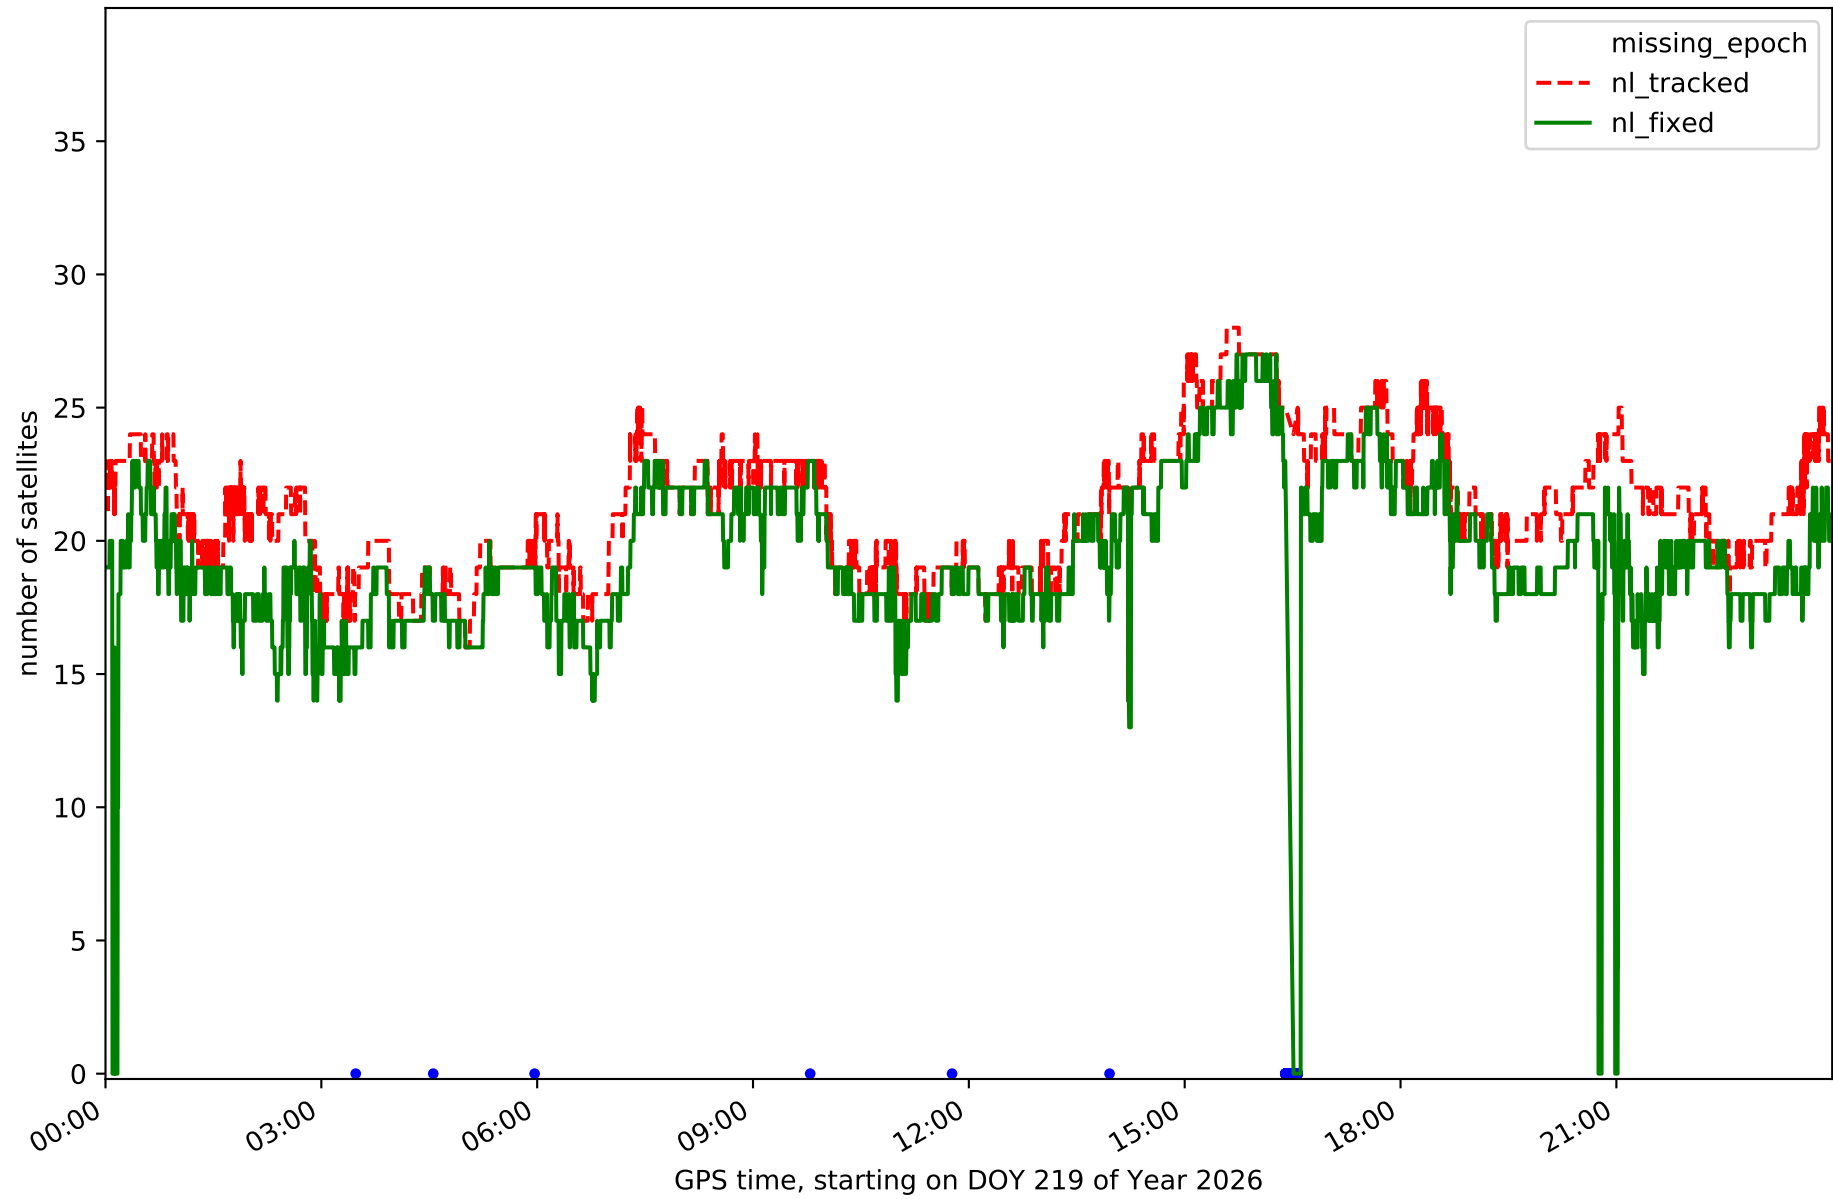


Station GOME in network N32T

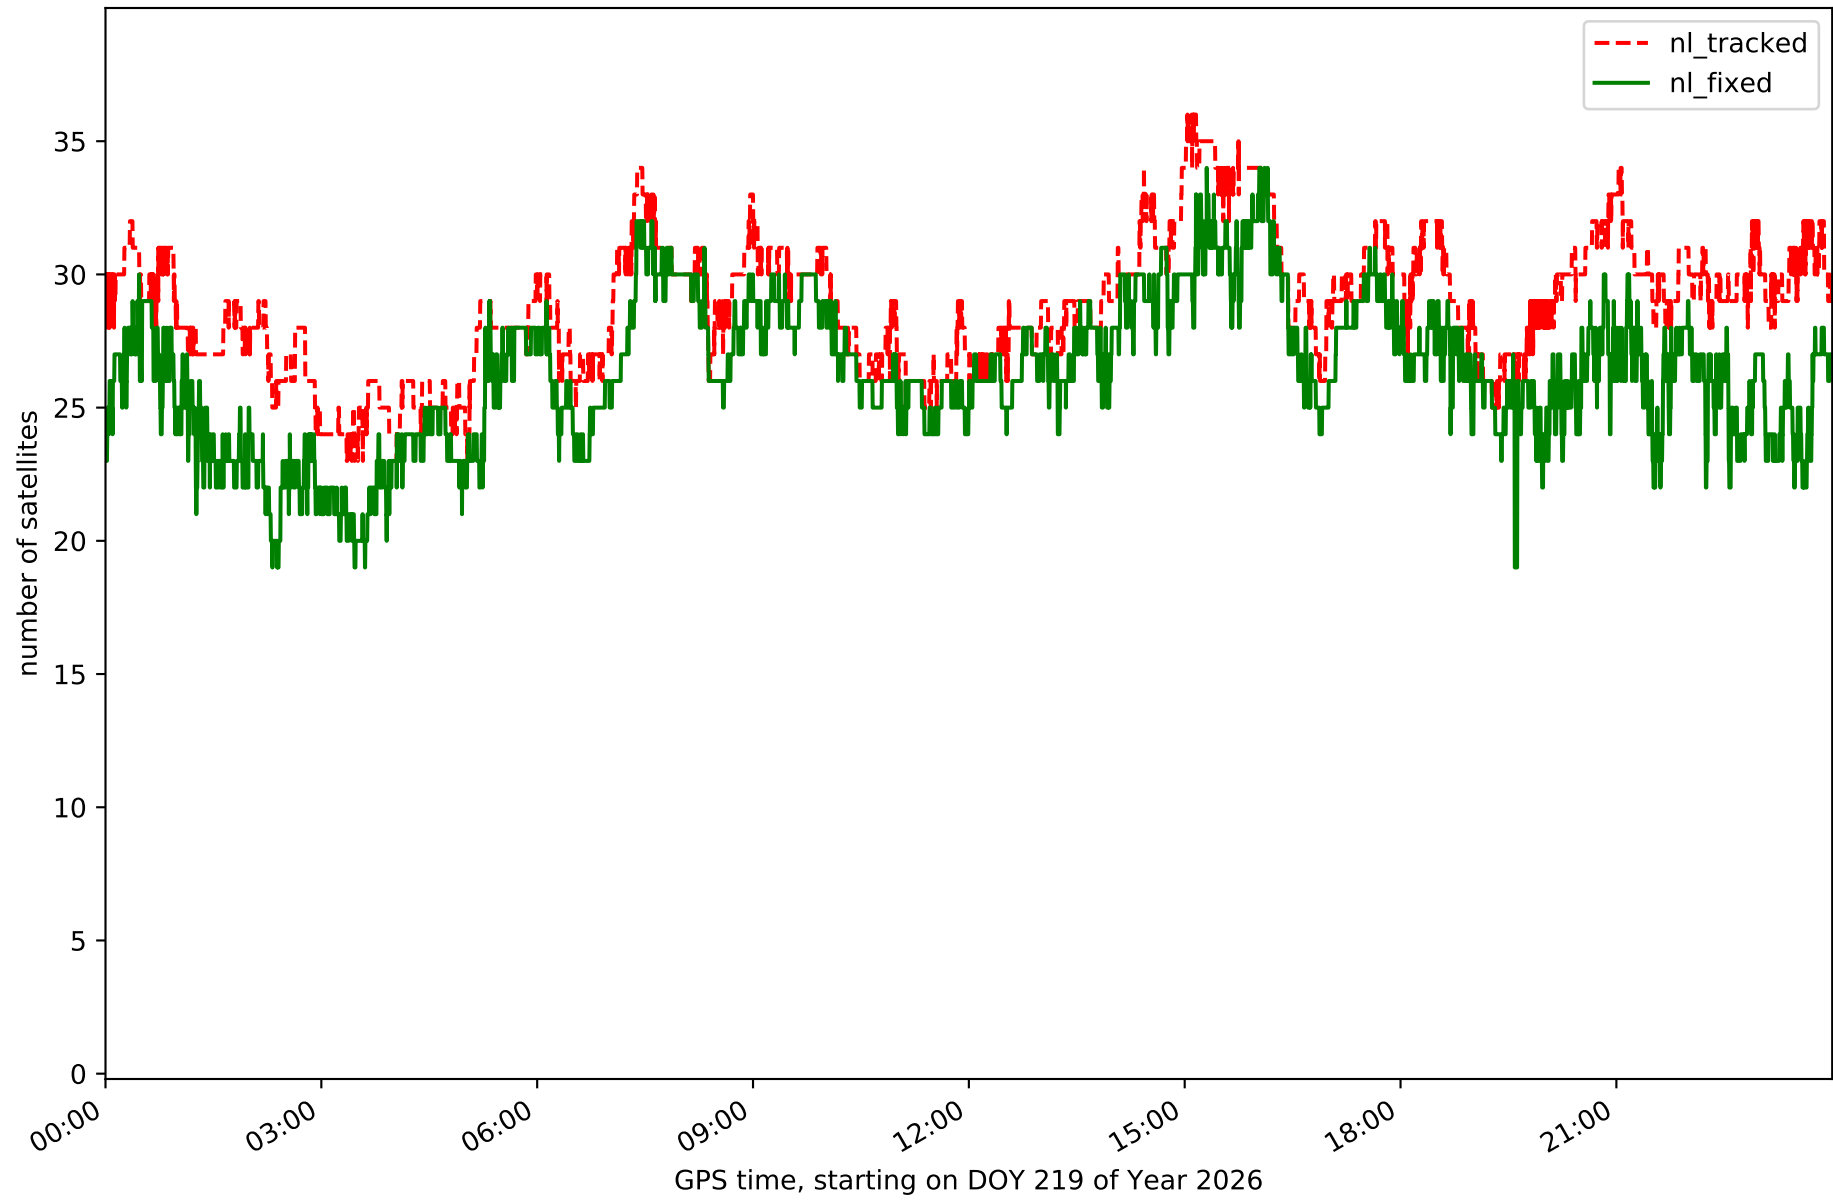


Station IZAN in network N32T

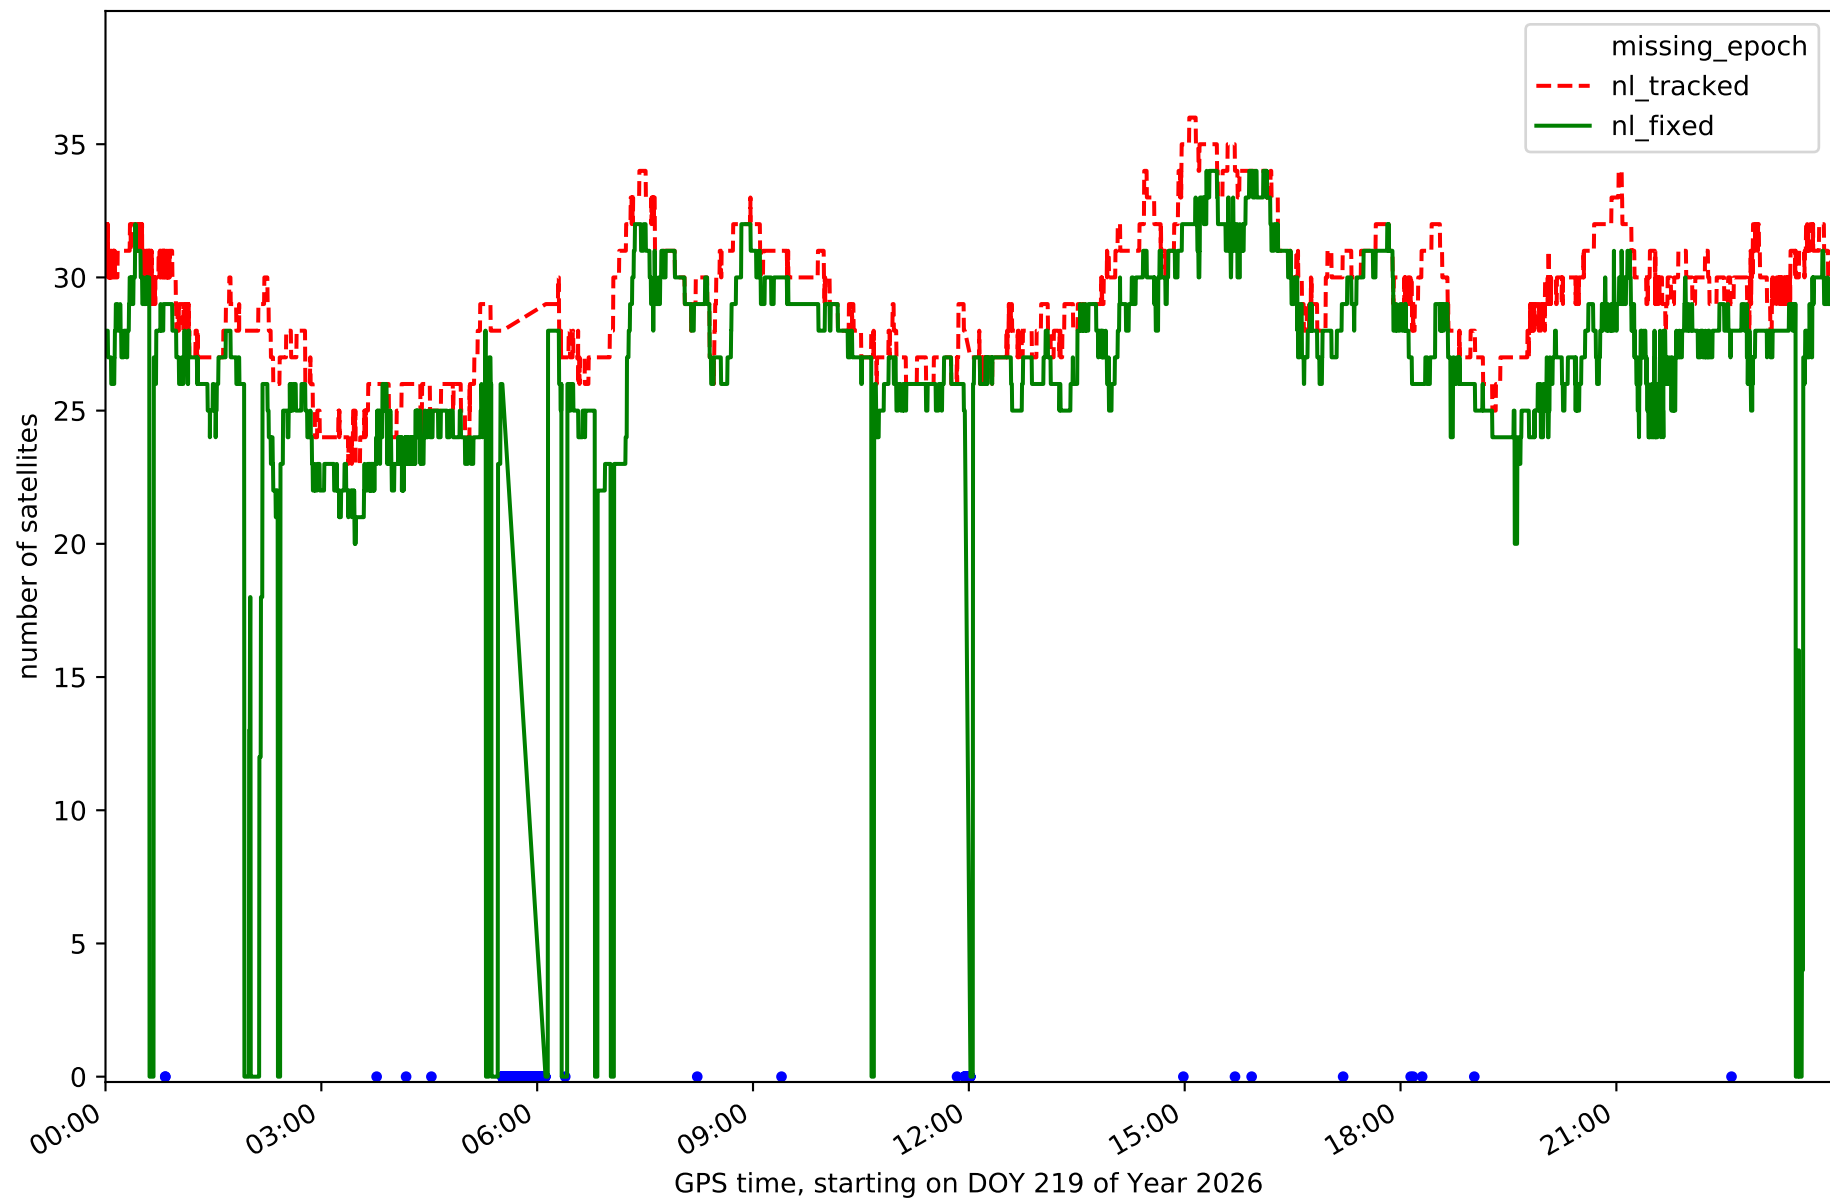


Station LP01 in network N32T

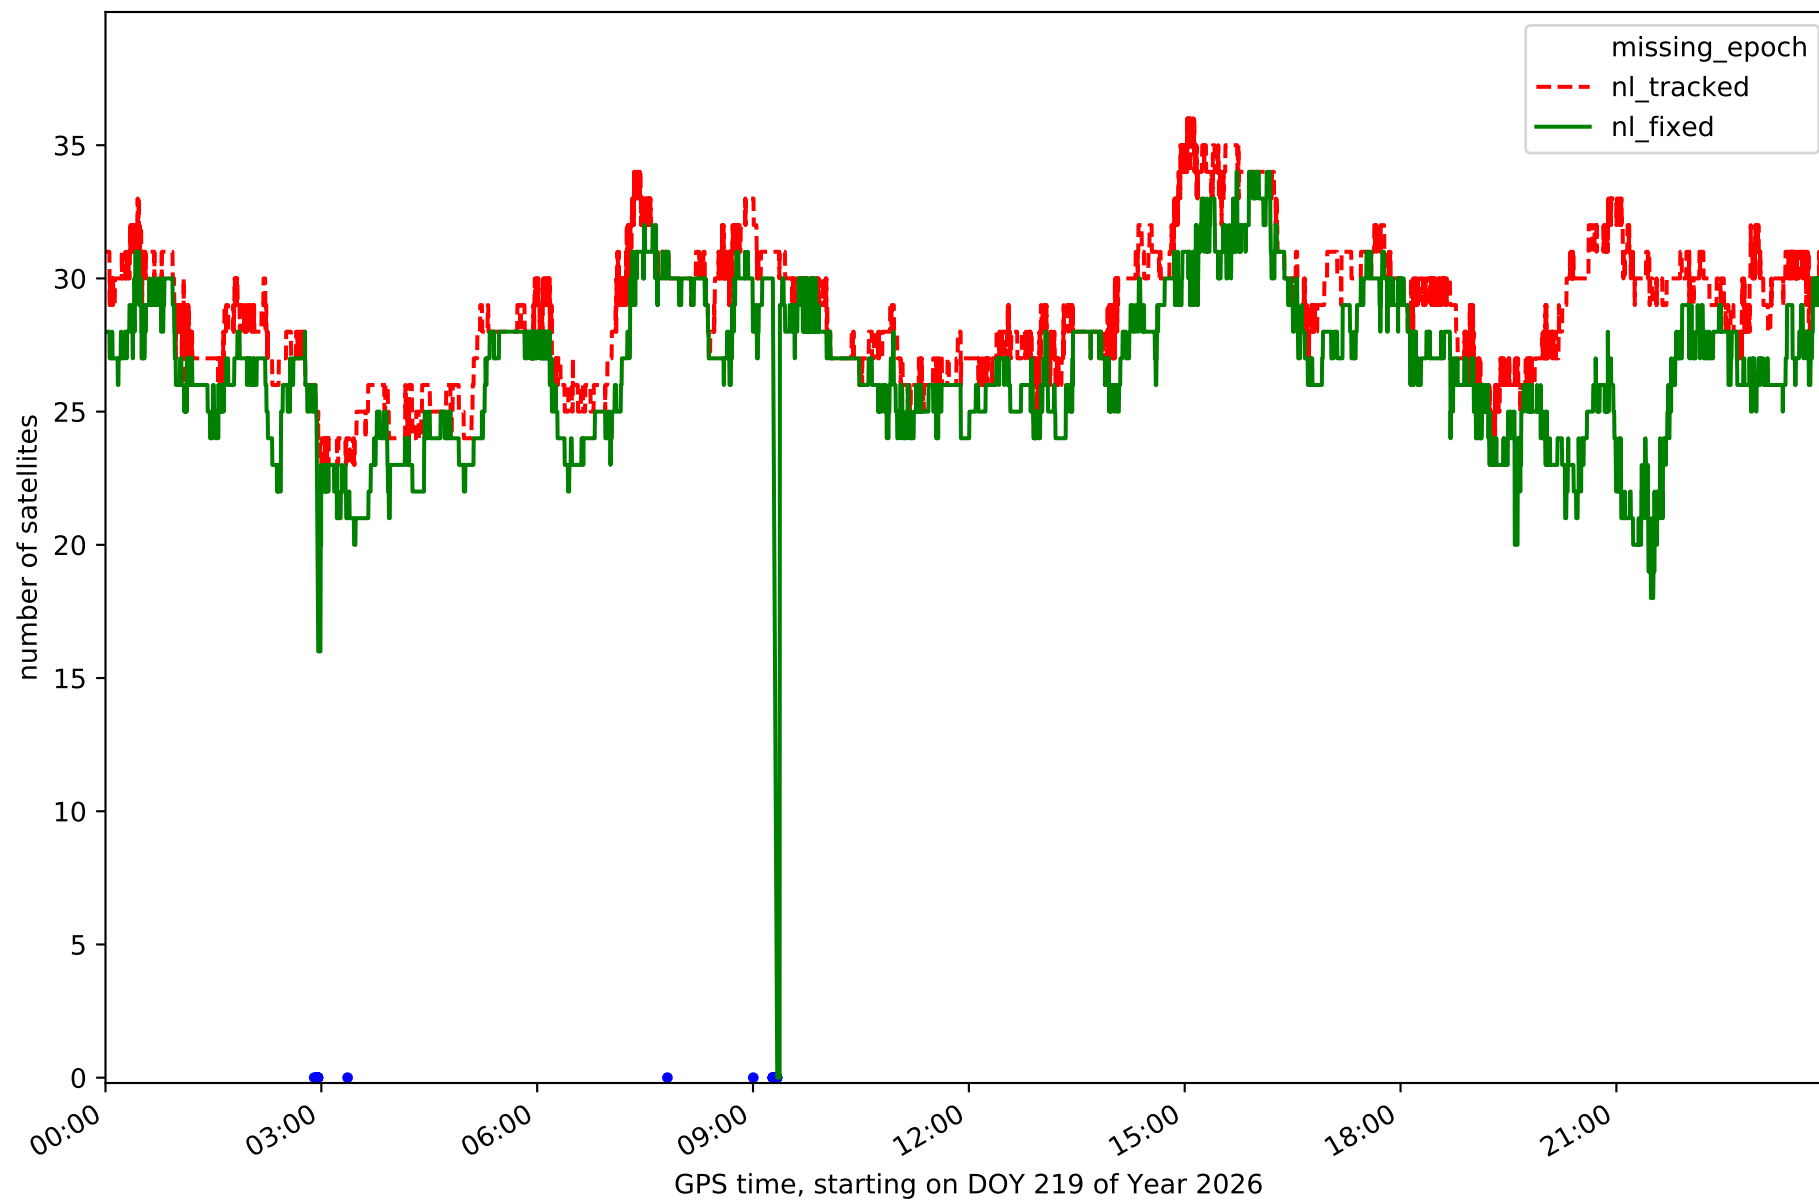


Station LP03 in network N32T

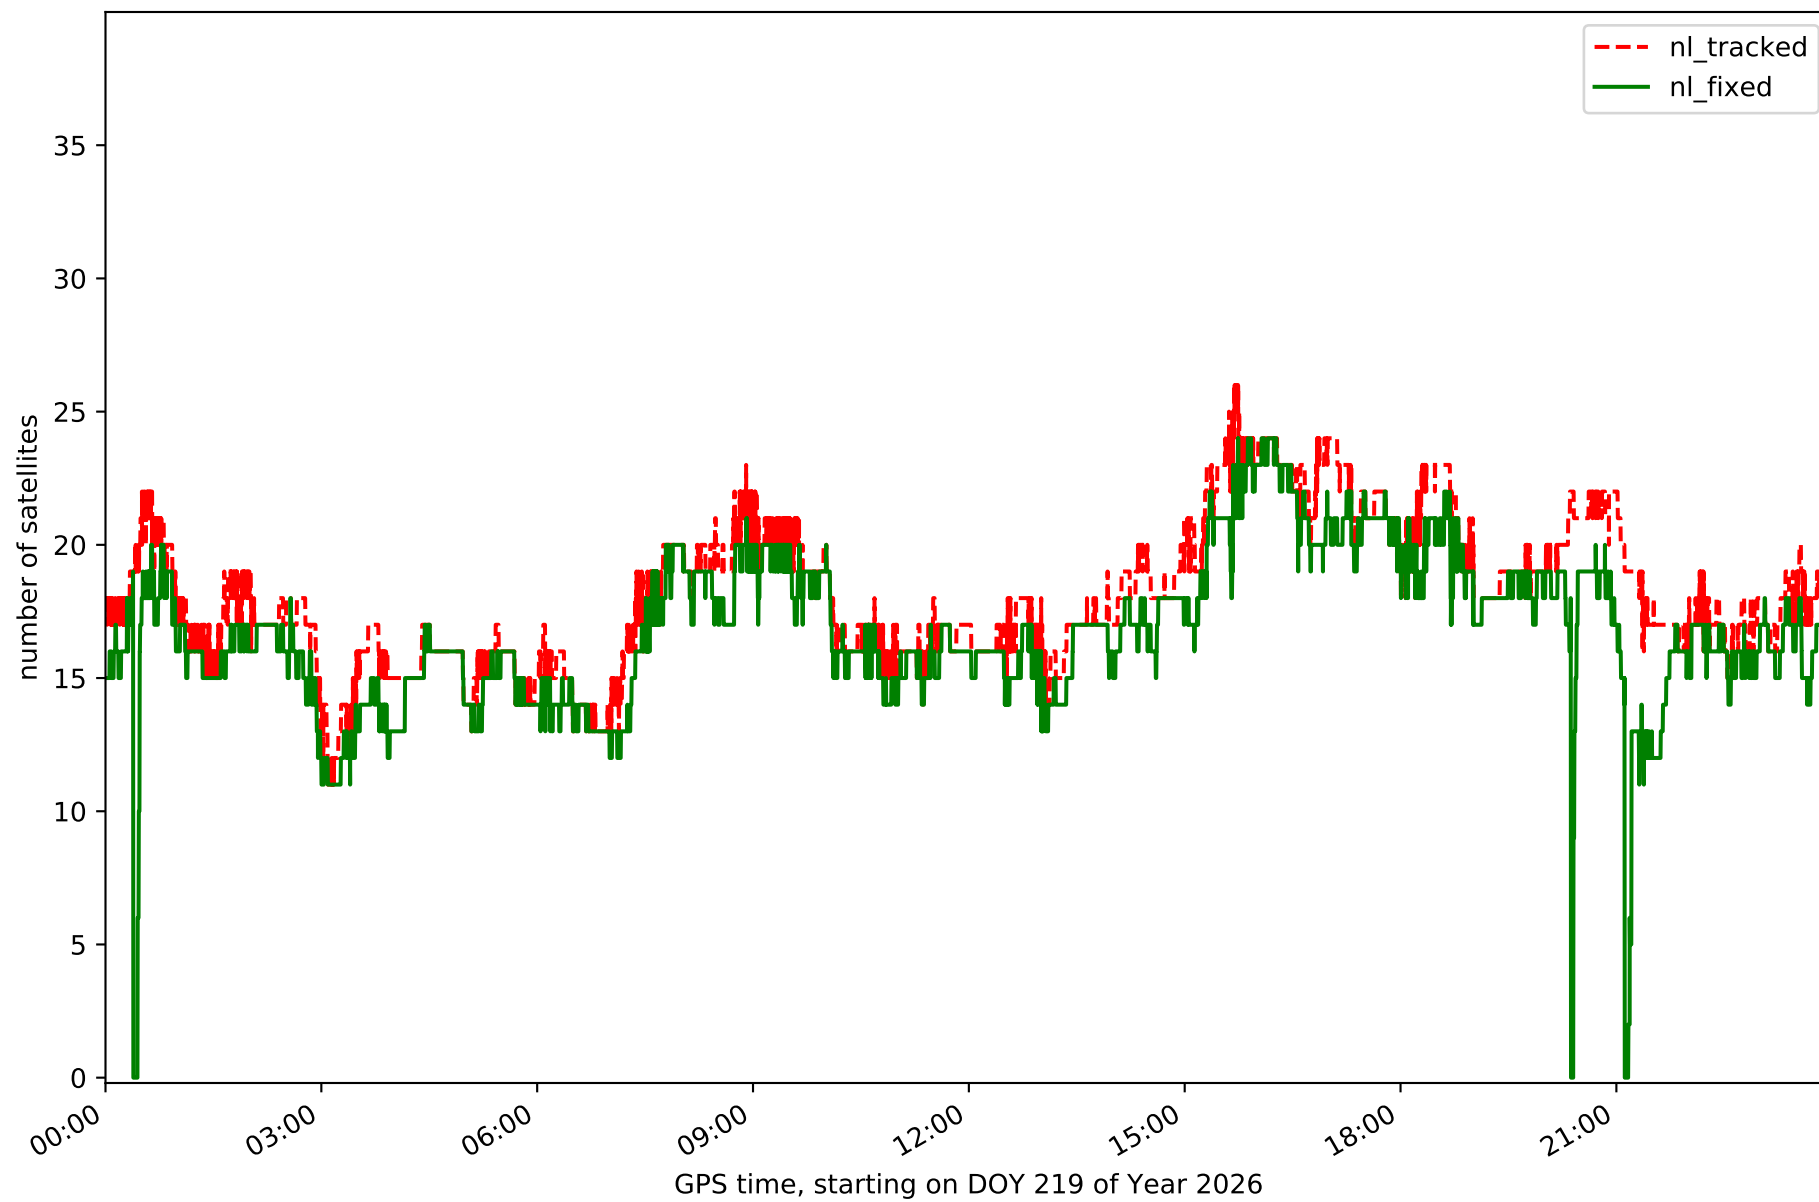


Station LPAL in network N32T

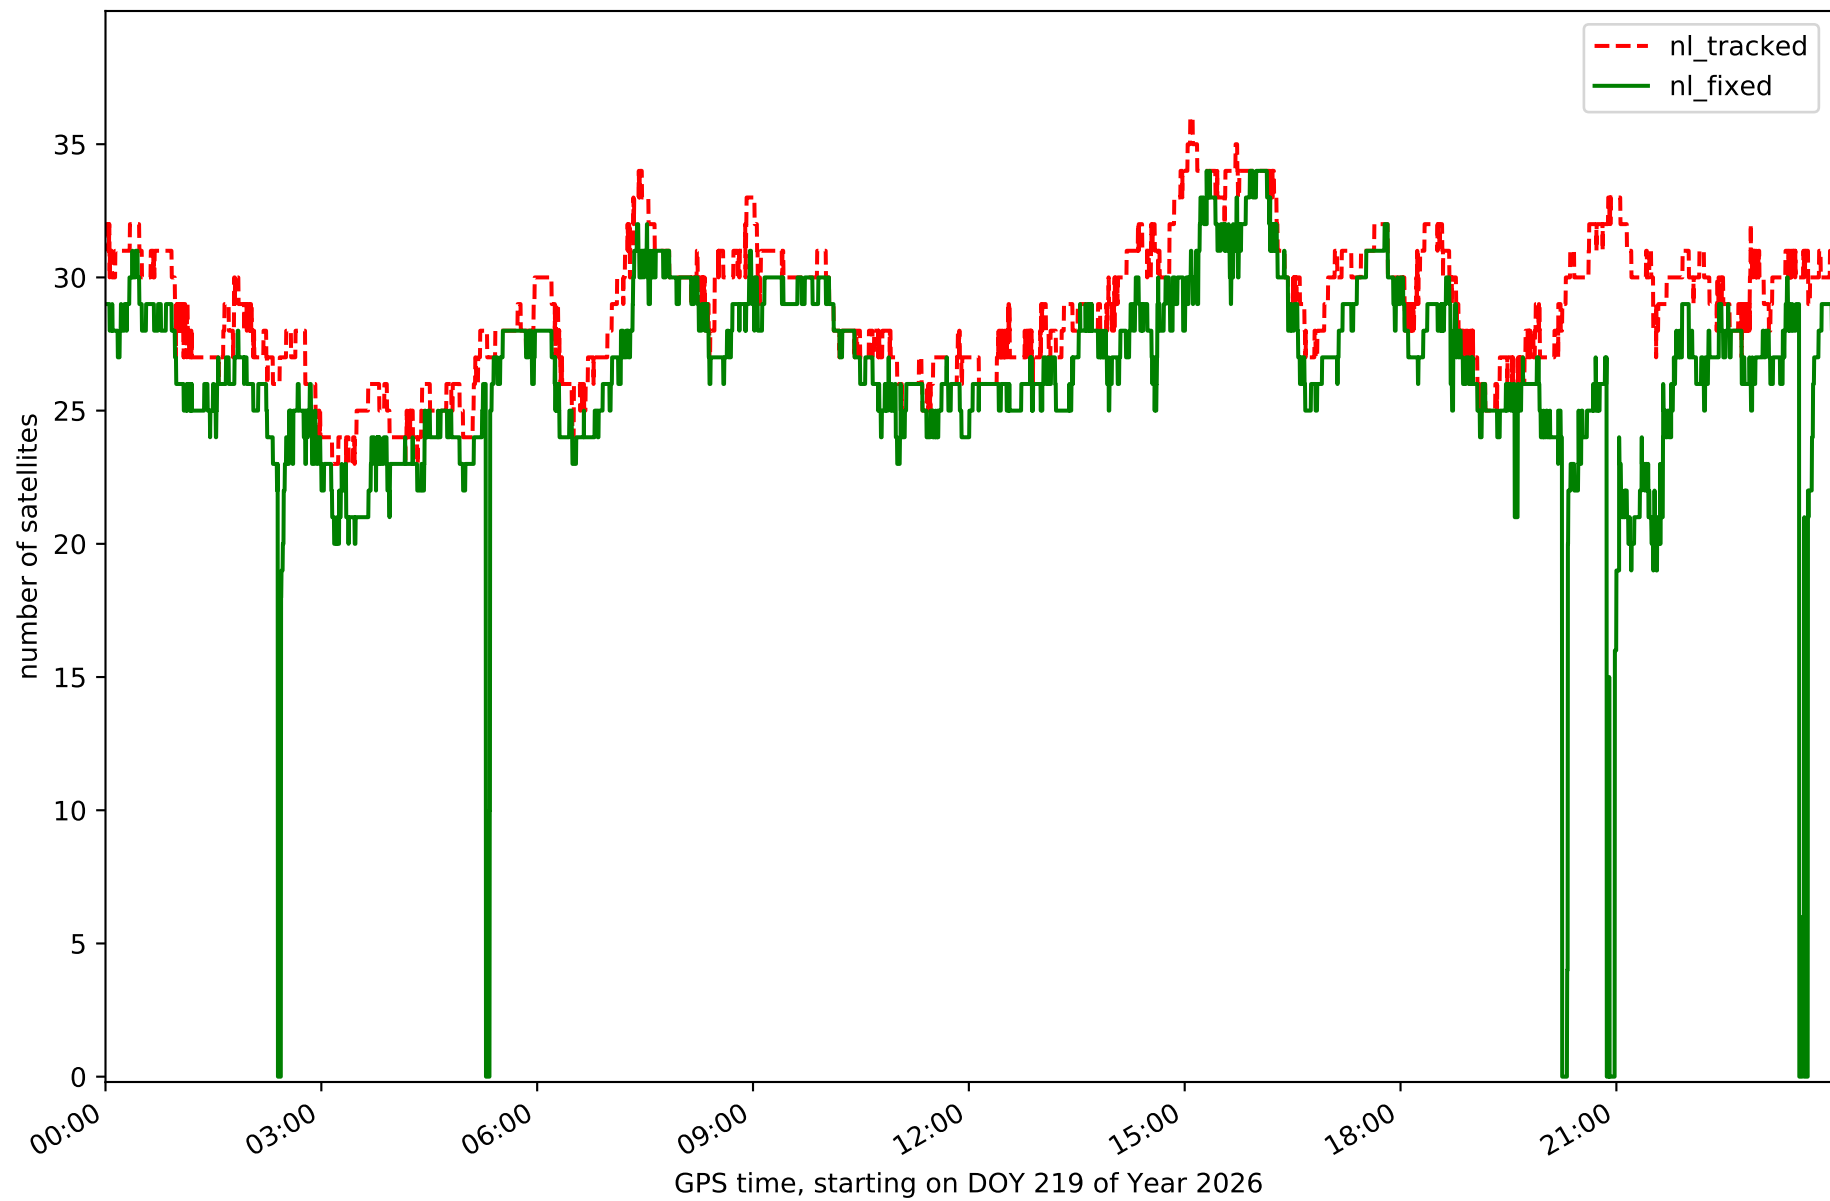


Station LRES in network N32T

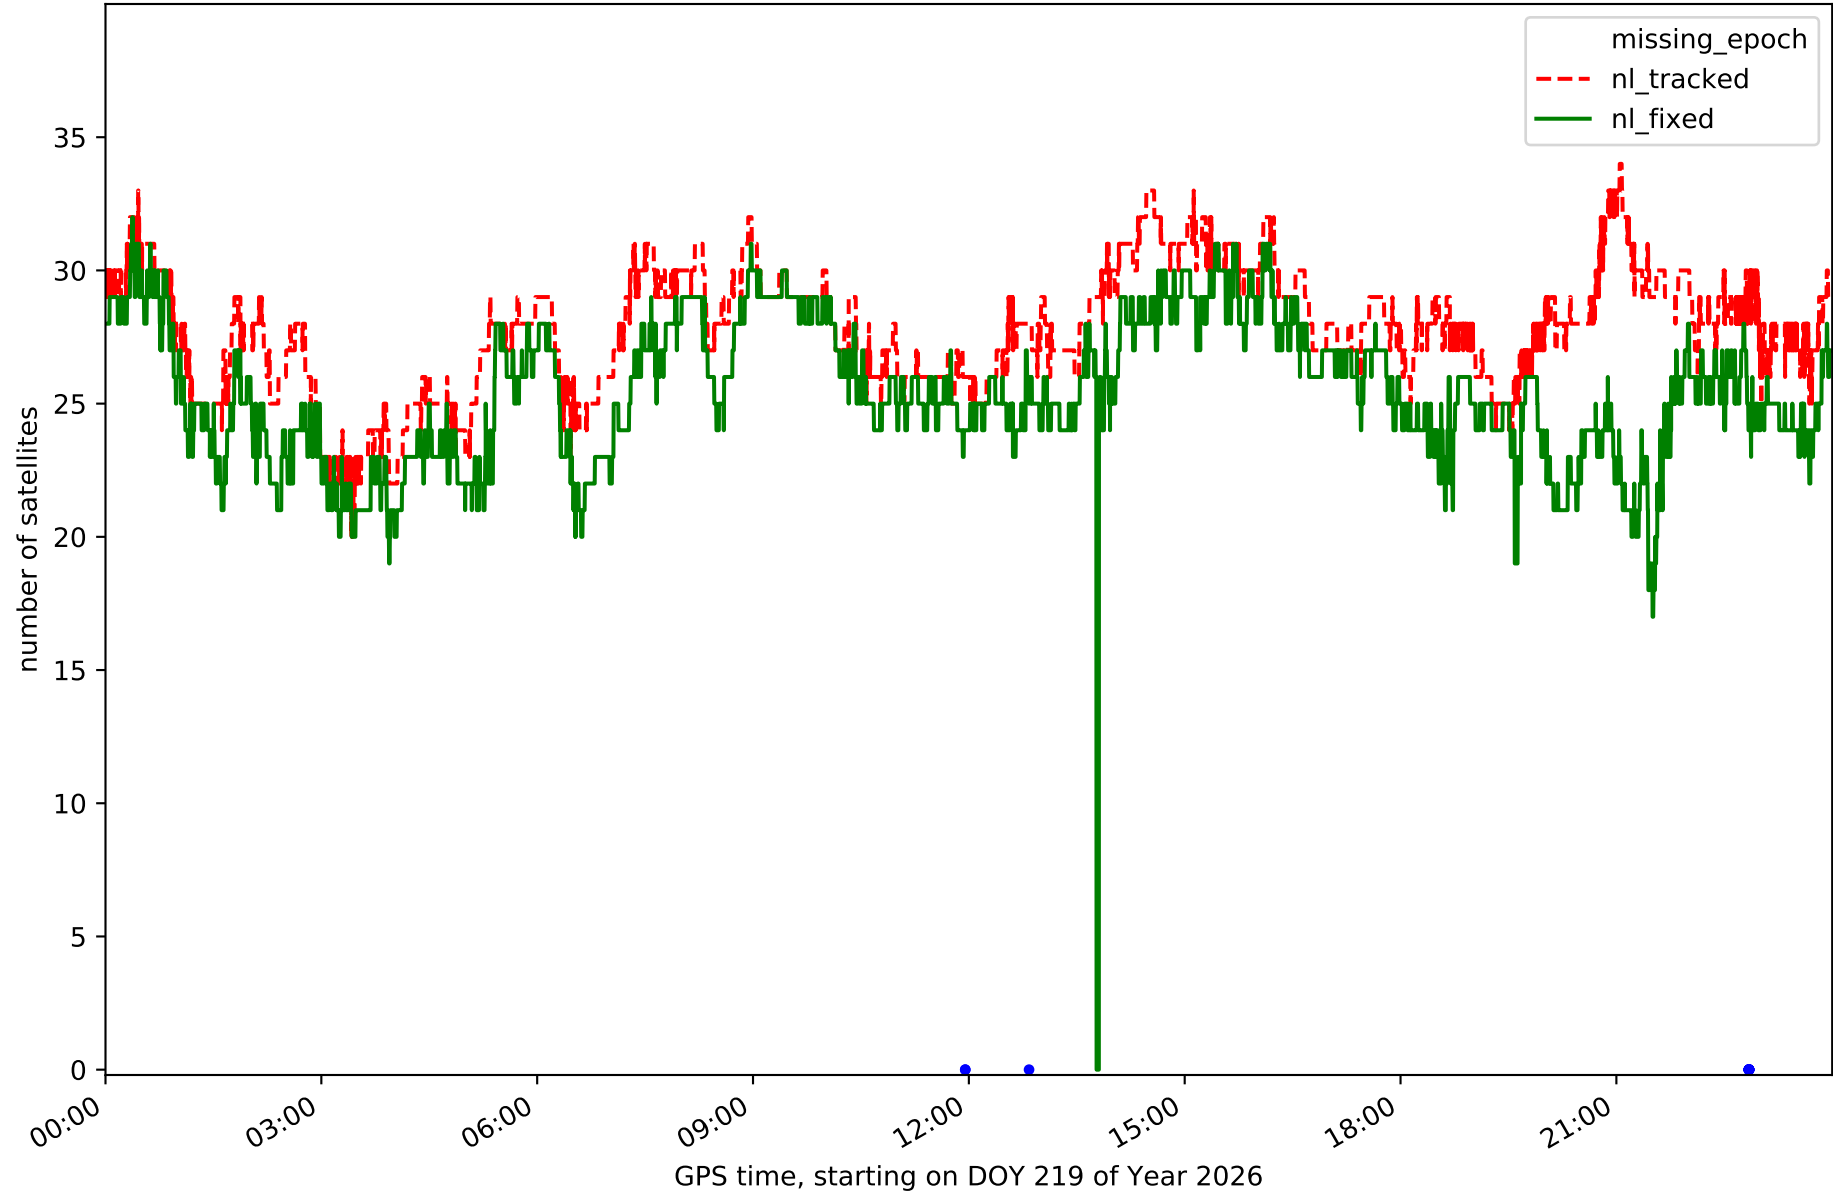


Station TN01 in network N32T

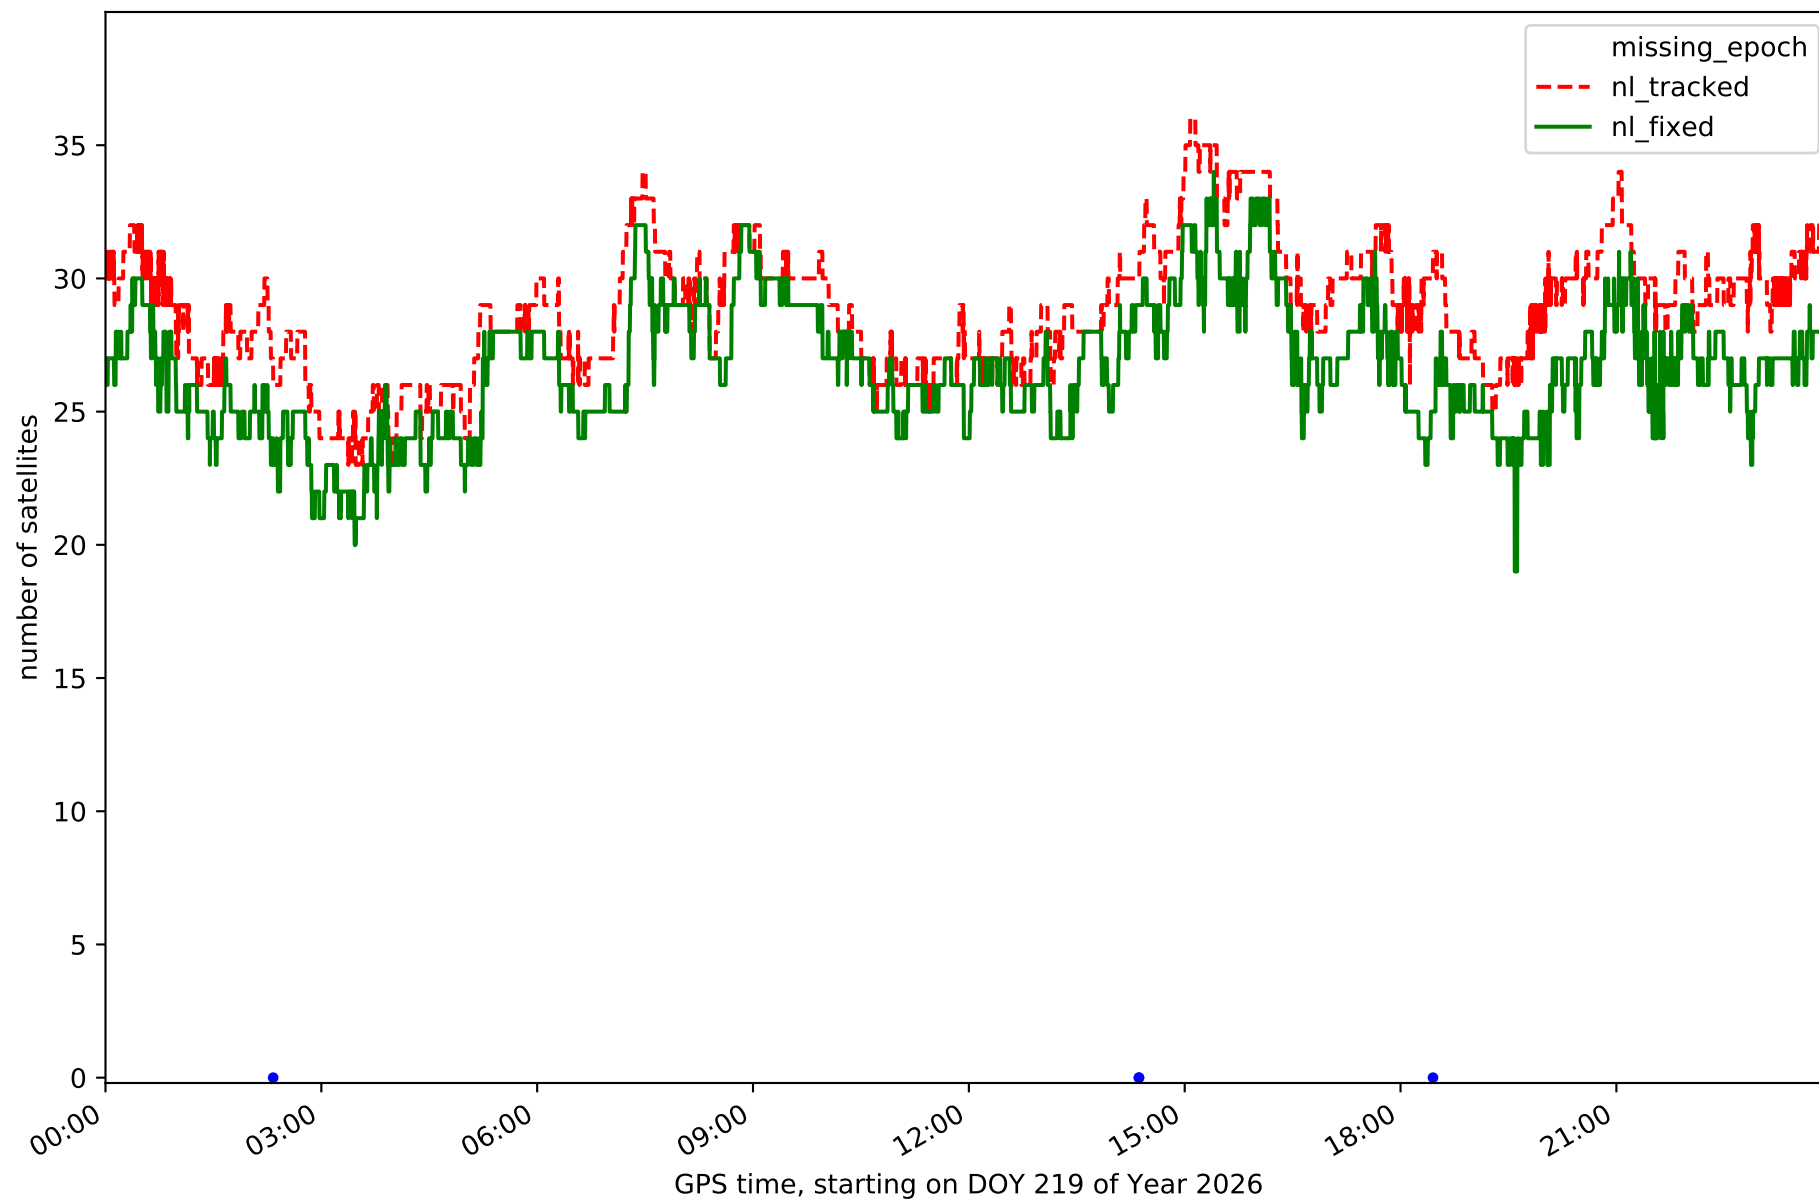


Station TN02 in network N32T

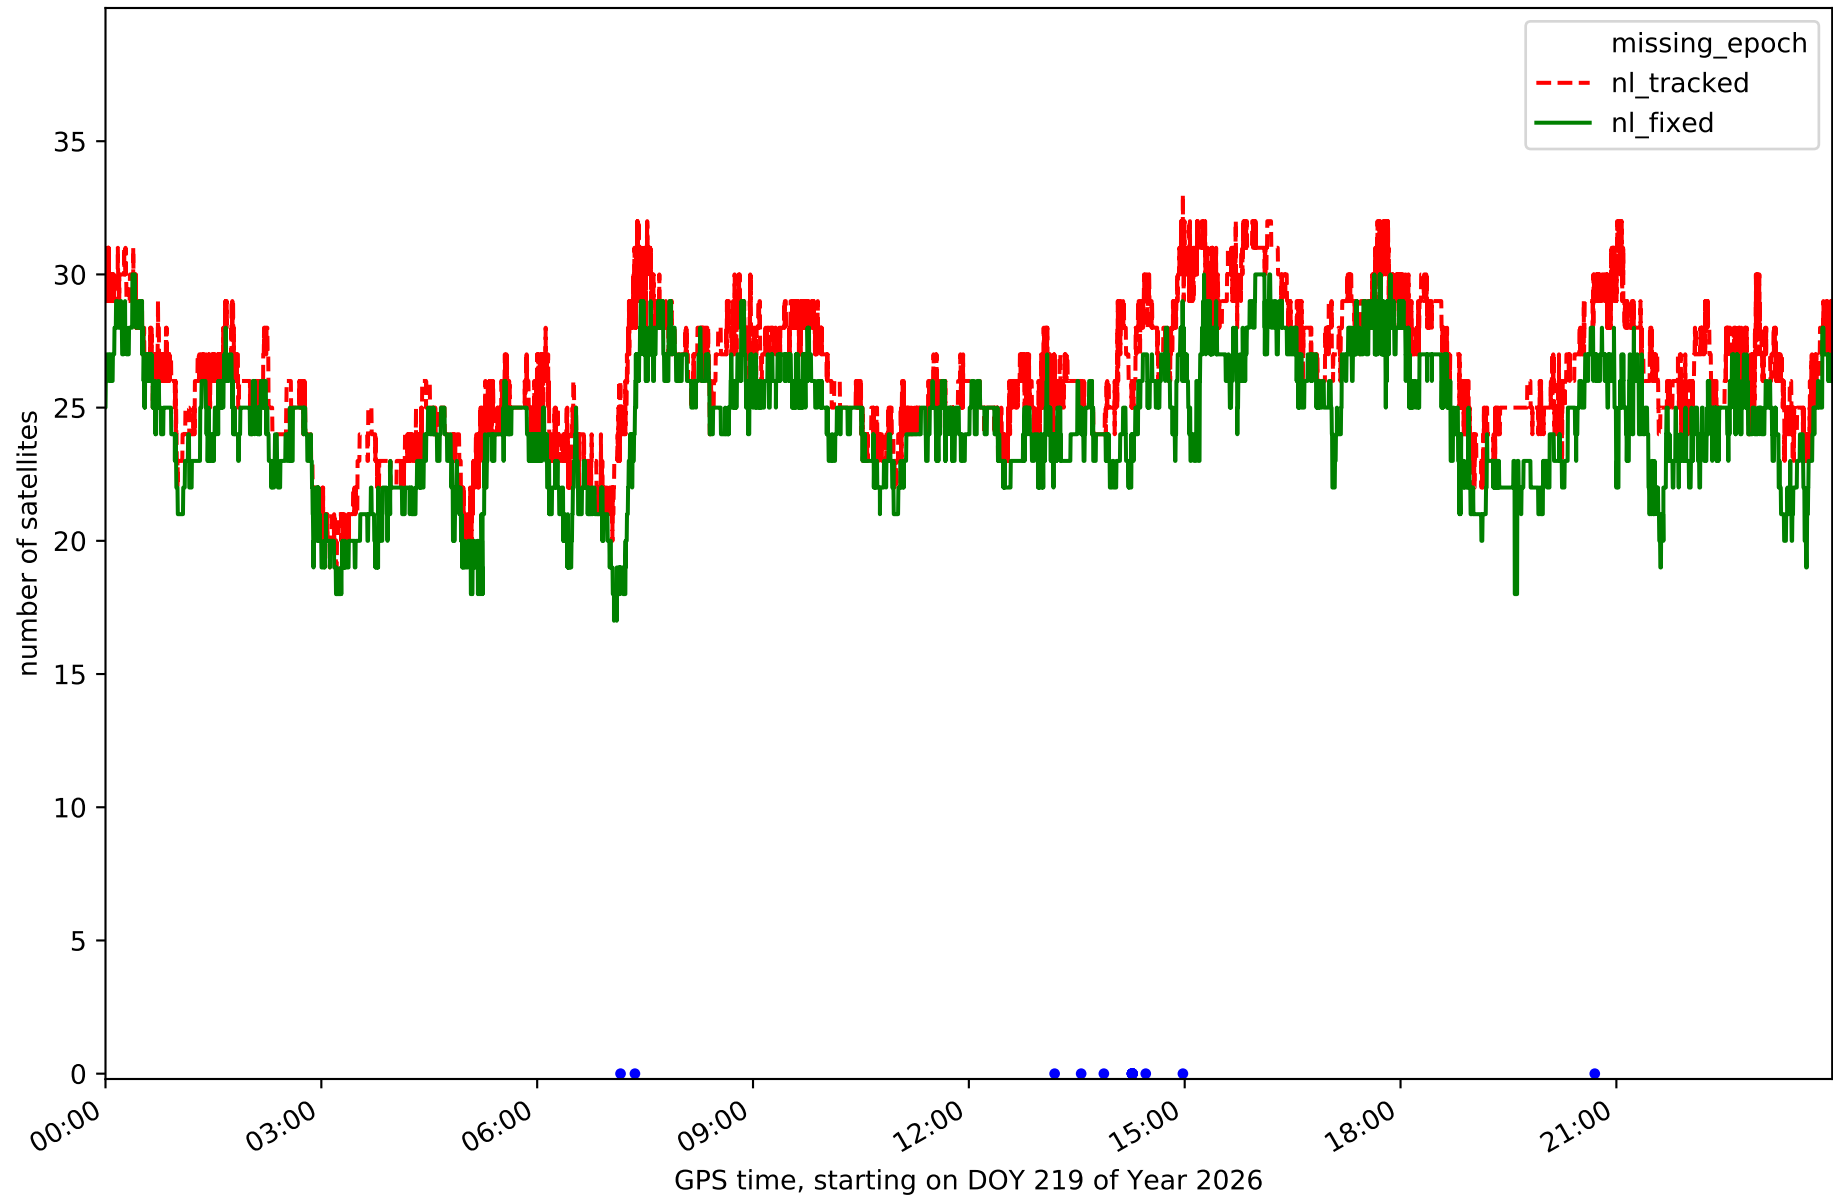


Station TN03 in network N32T

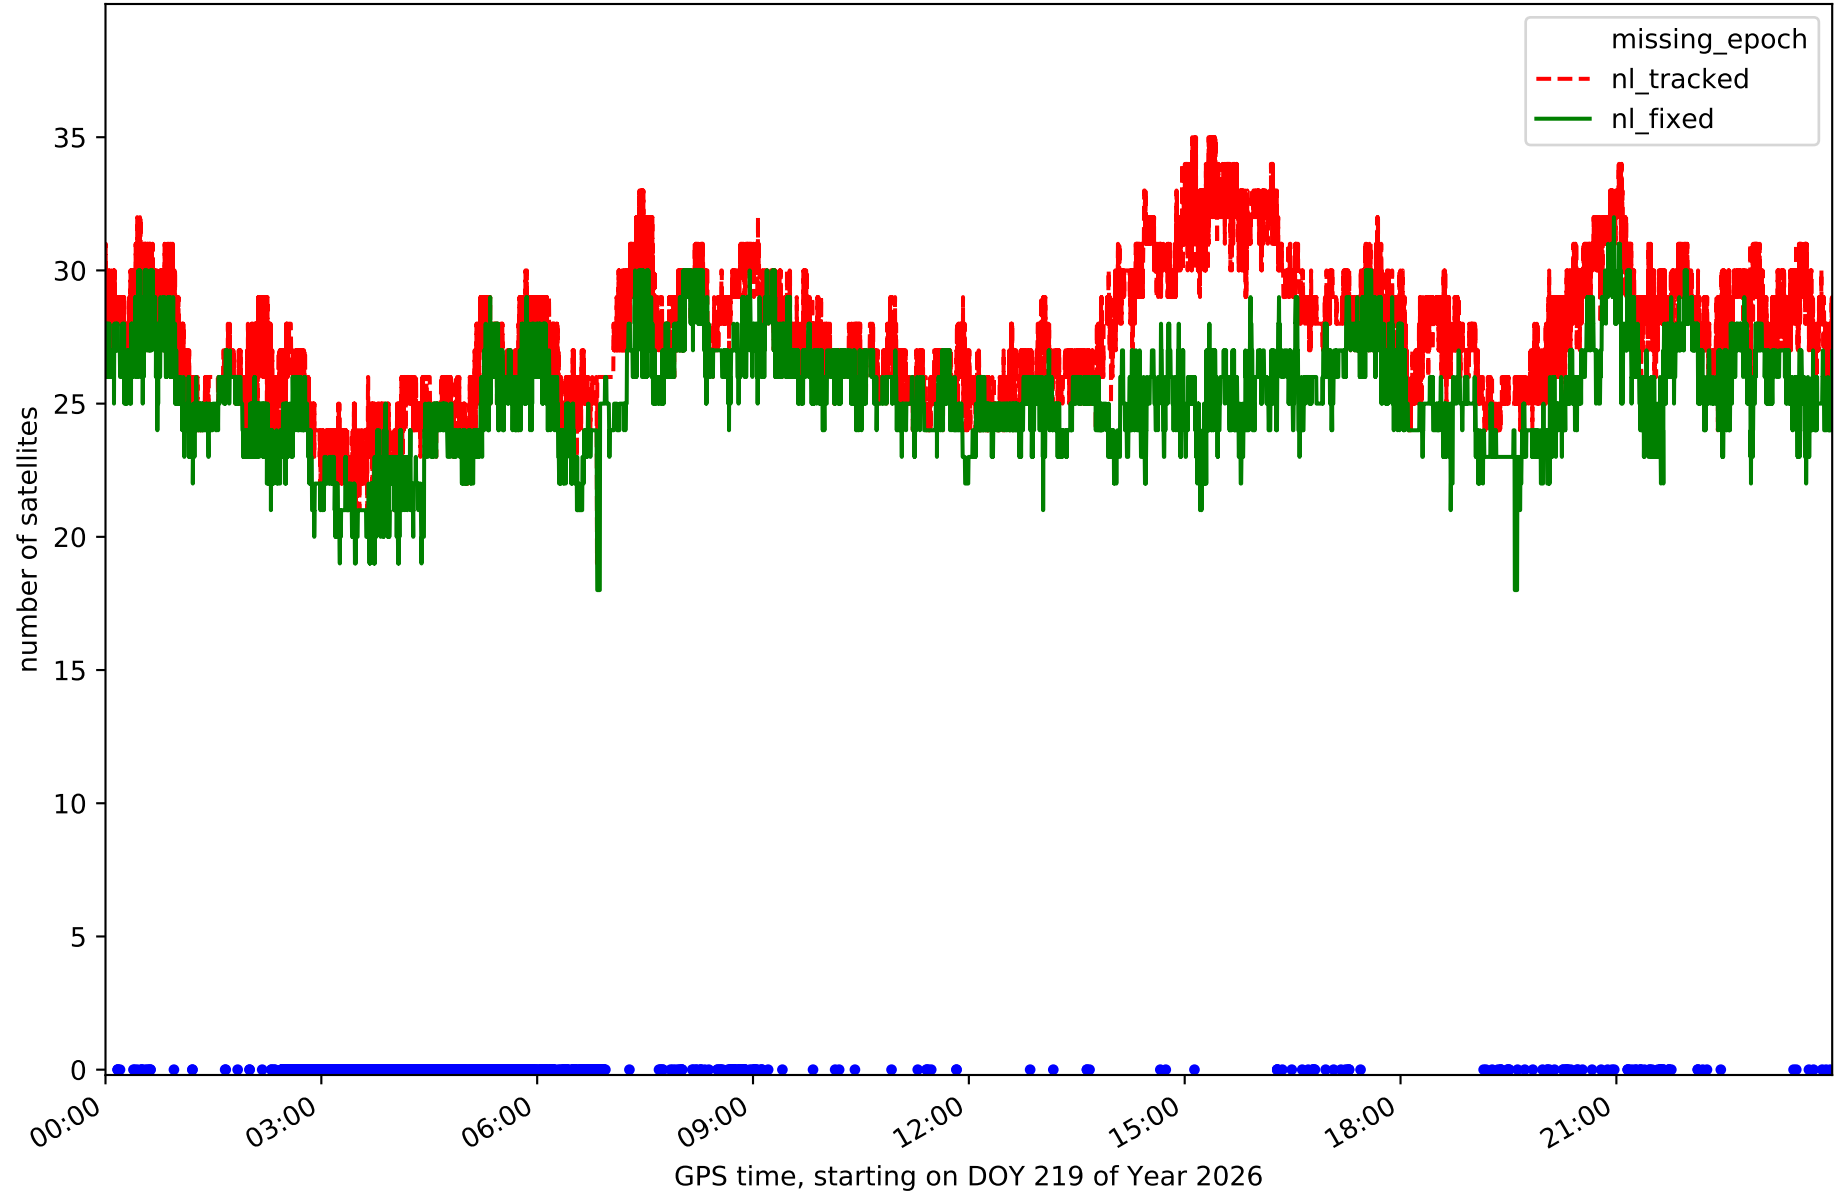


Station TN06 in network N32T

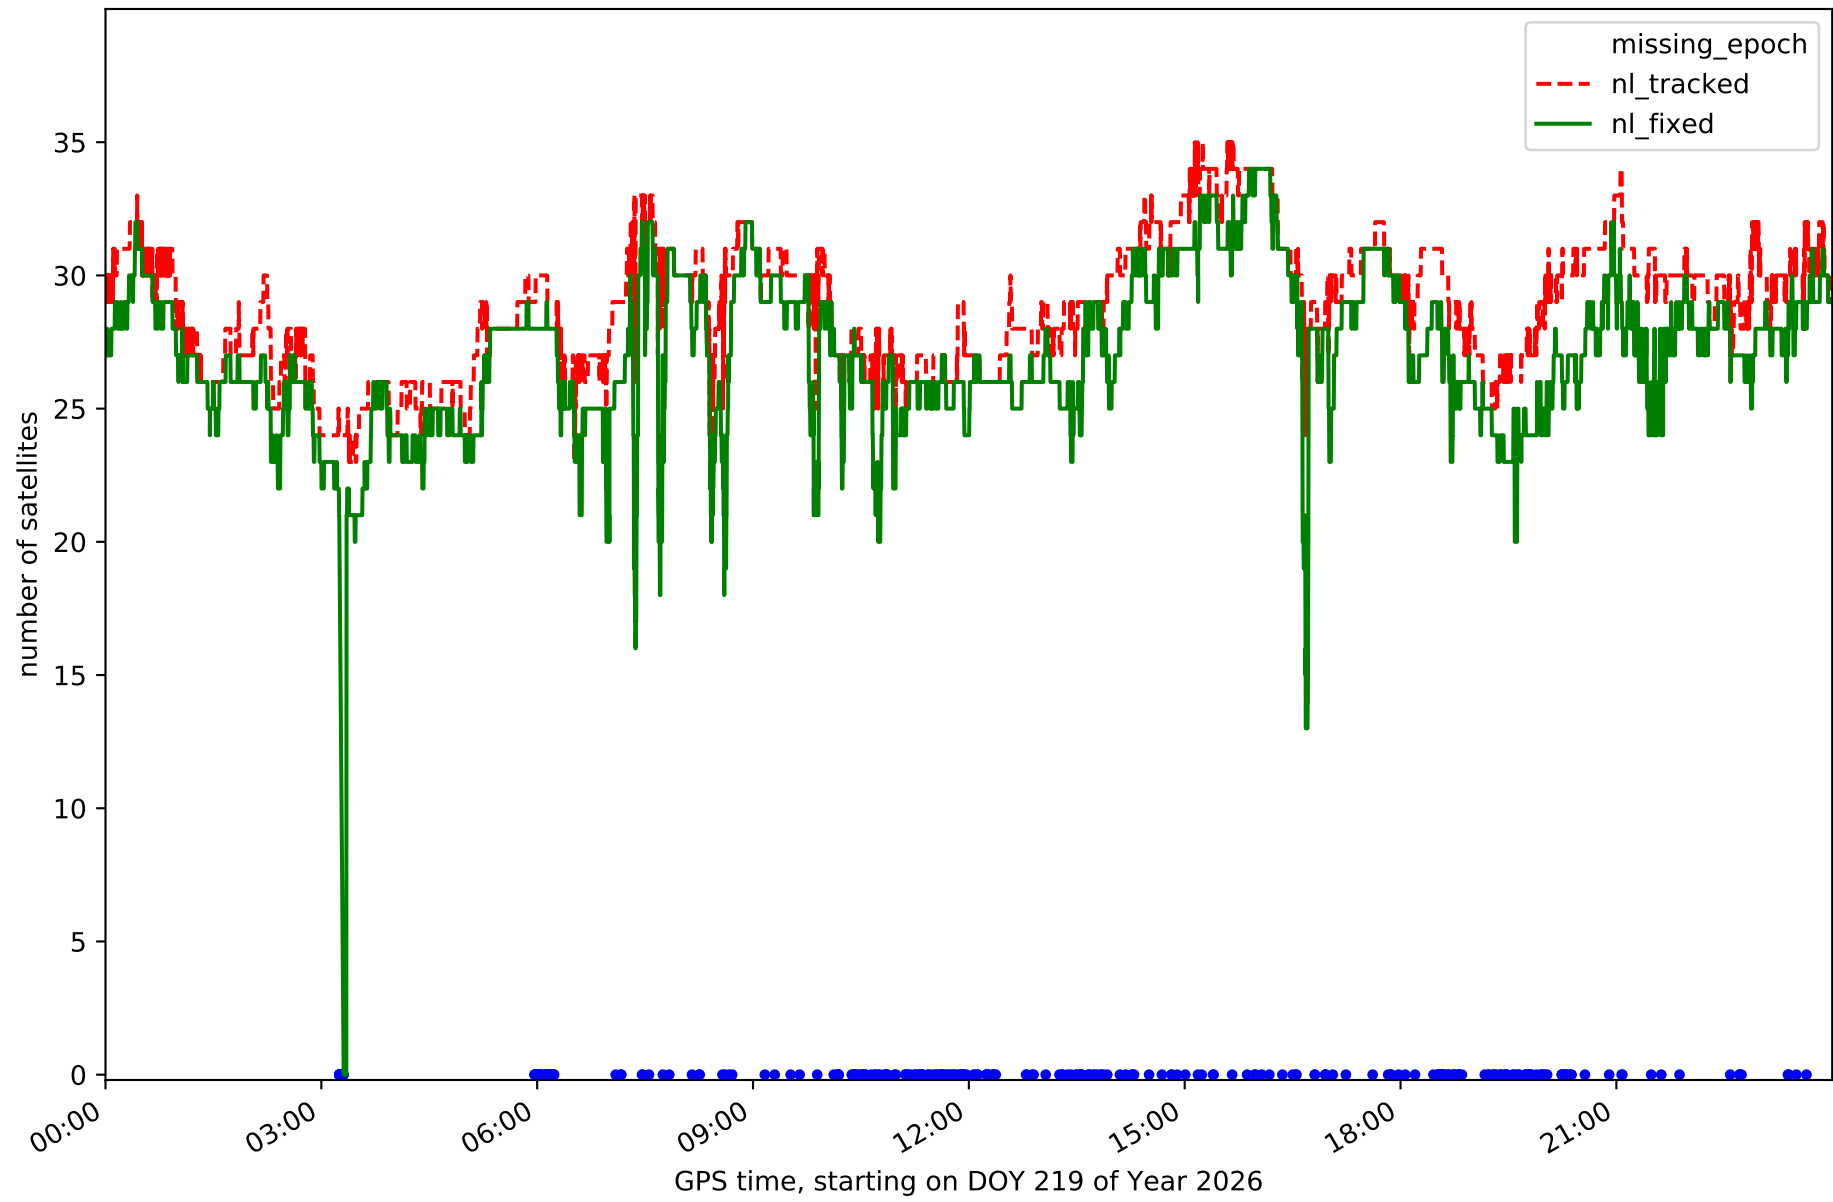


Station TN09 in network N32T

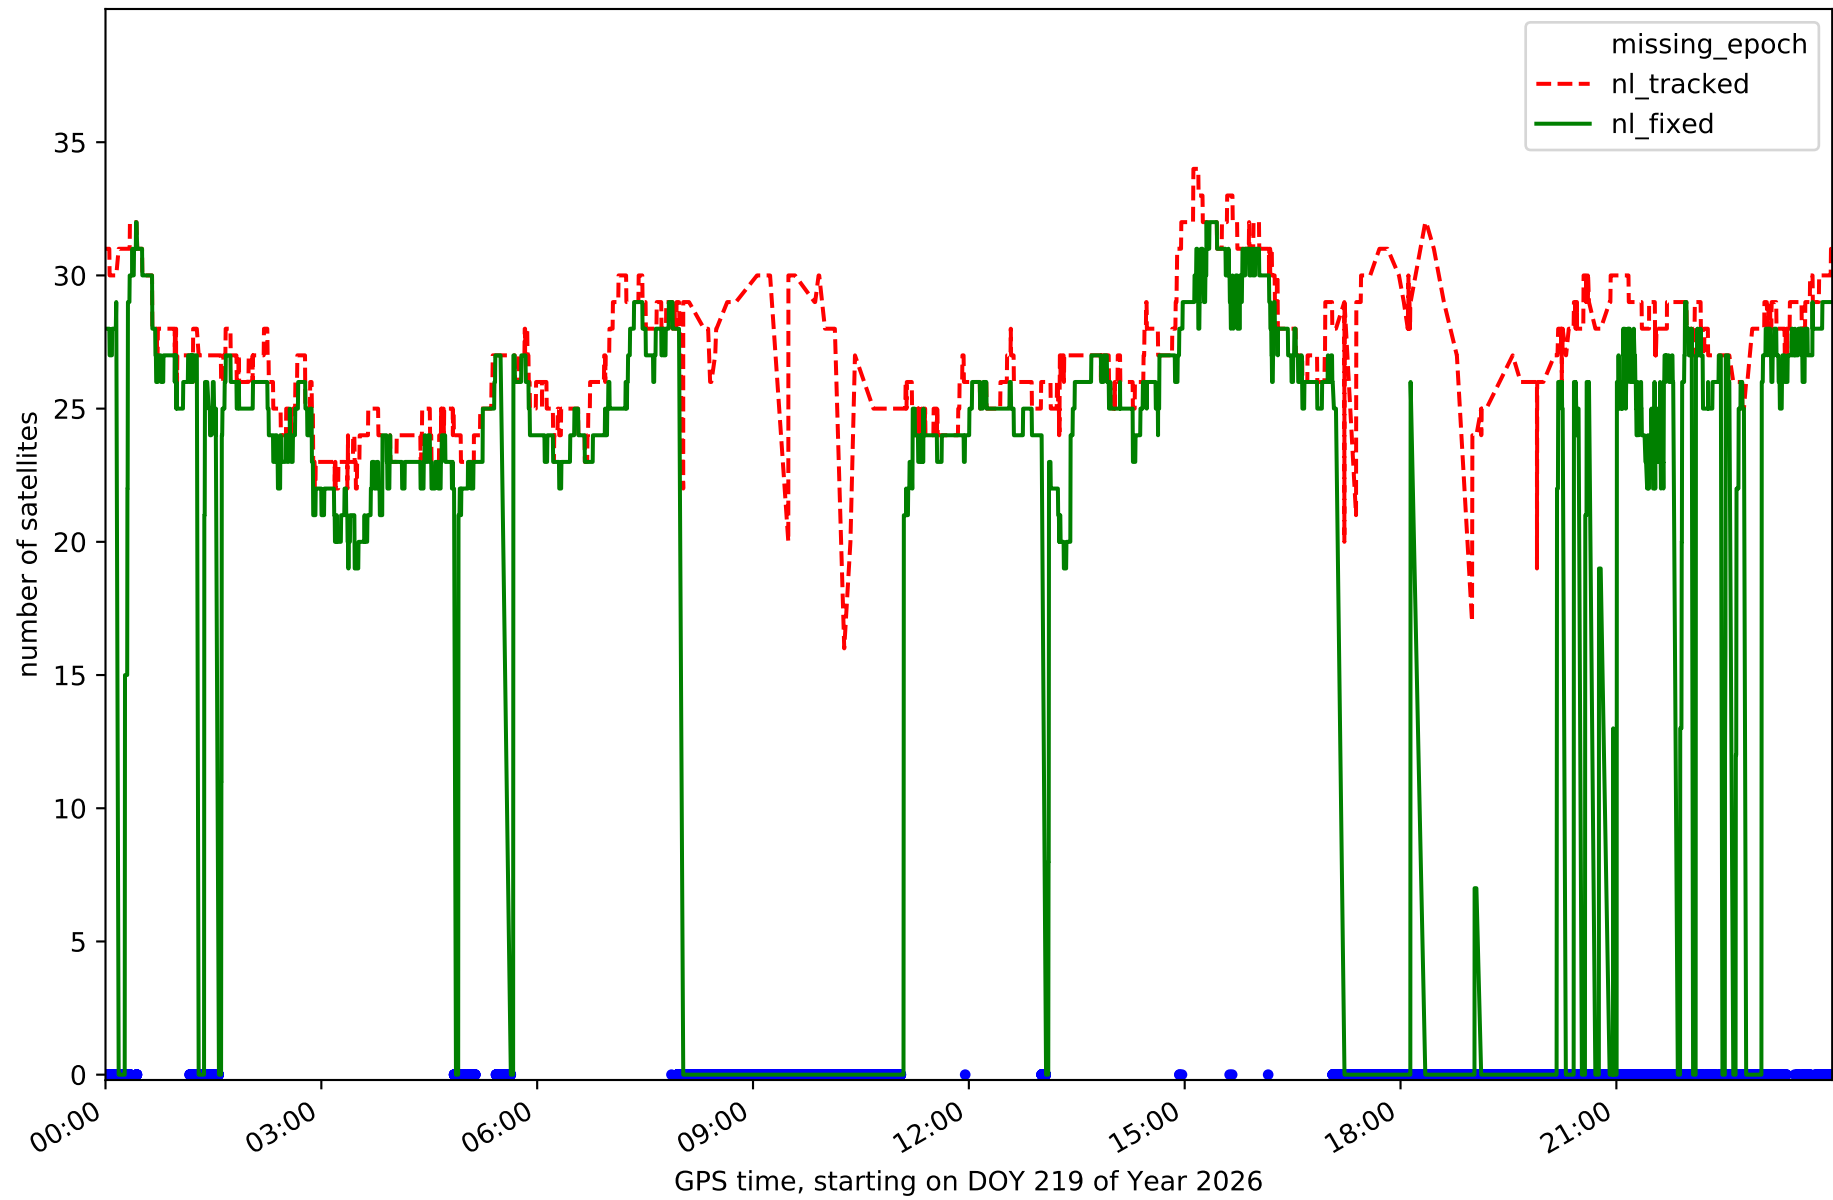


Station TE11 in network N32T

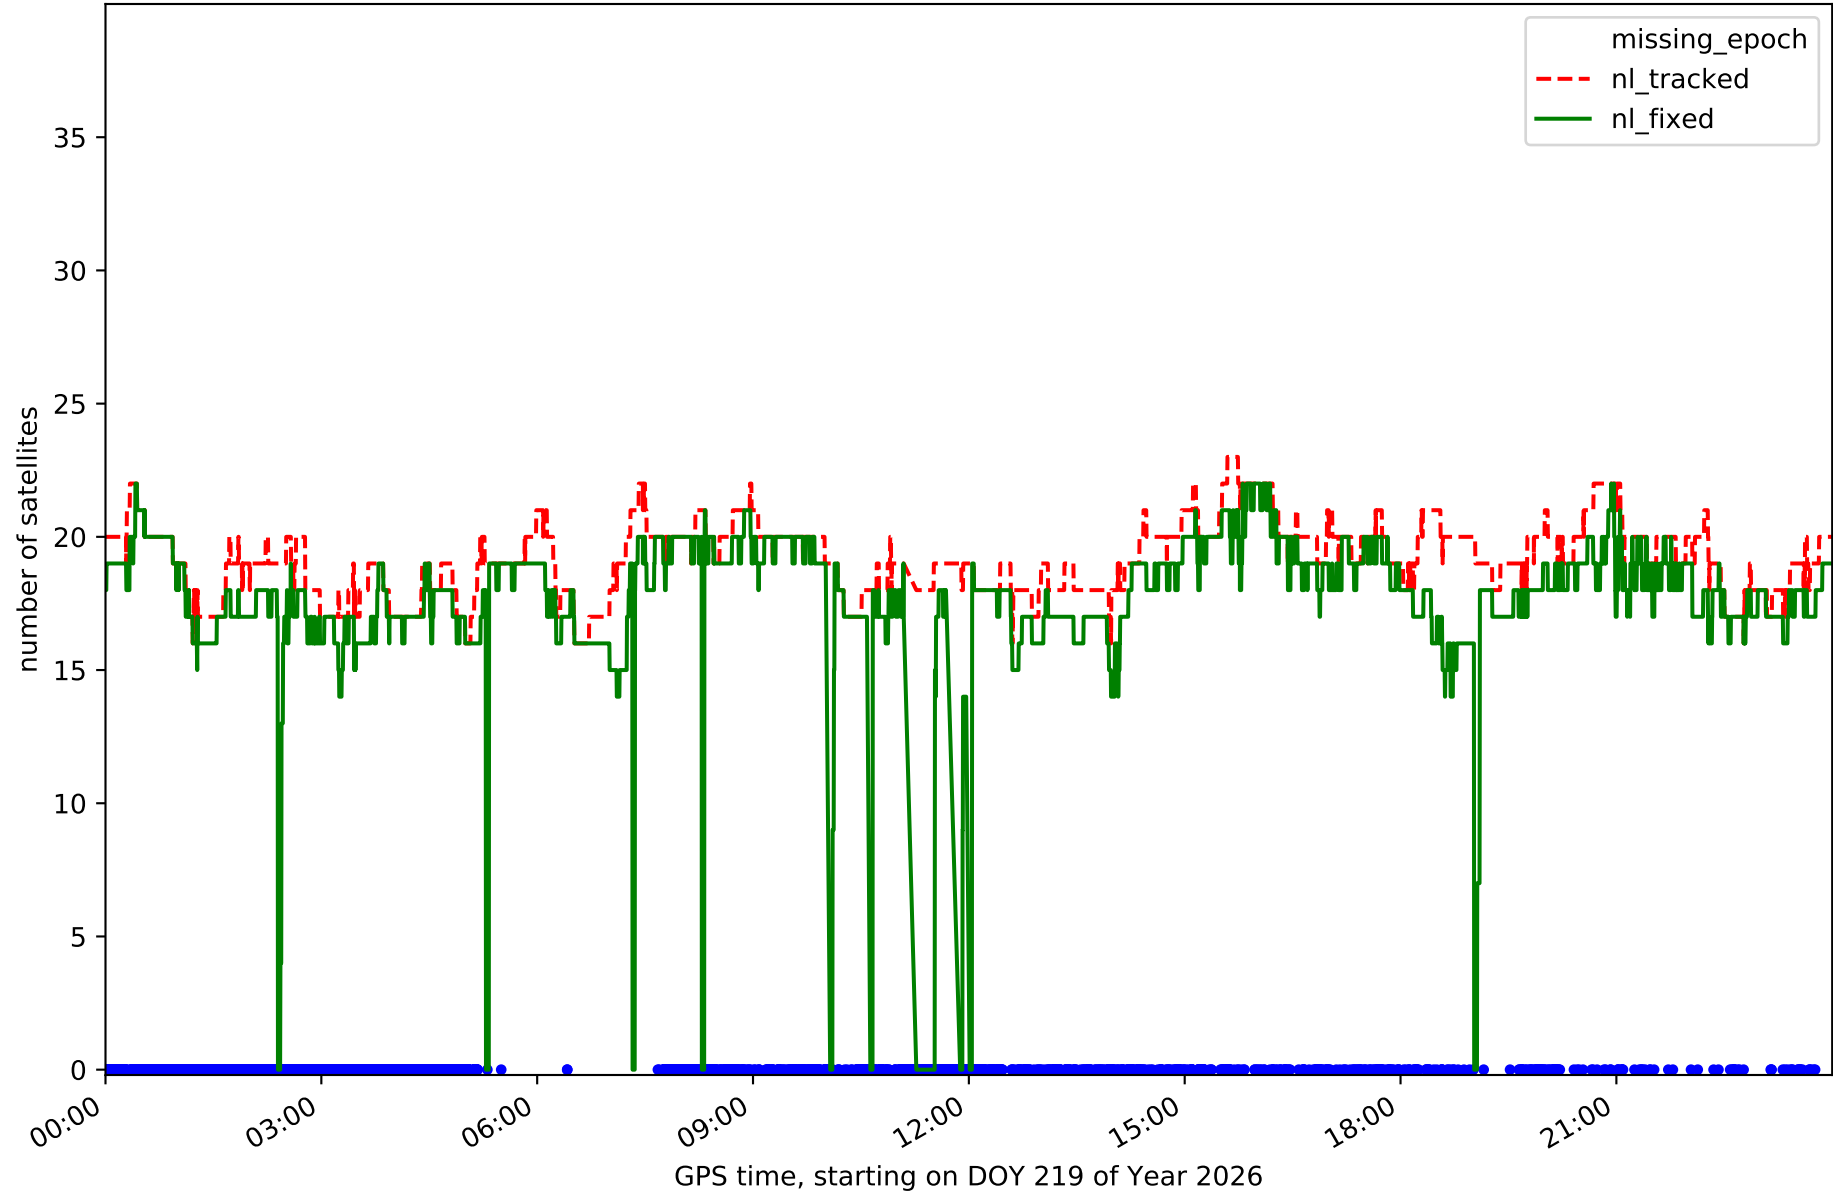


RefCheck for station EH01 in network N32T

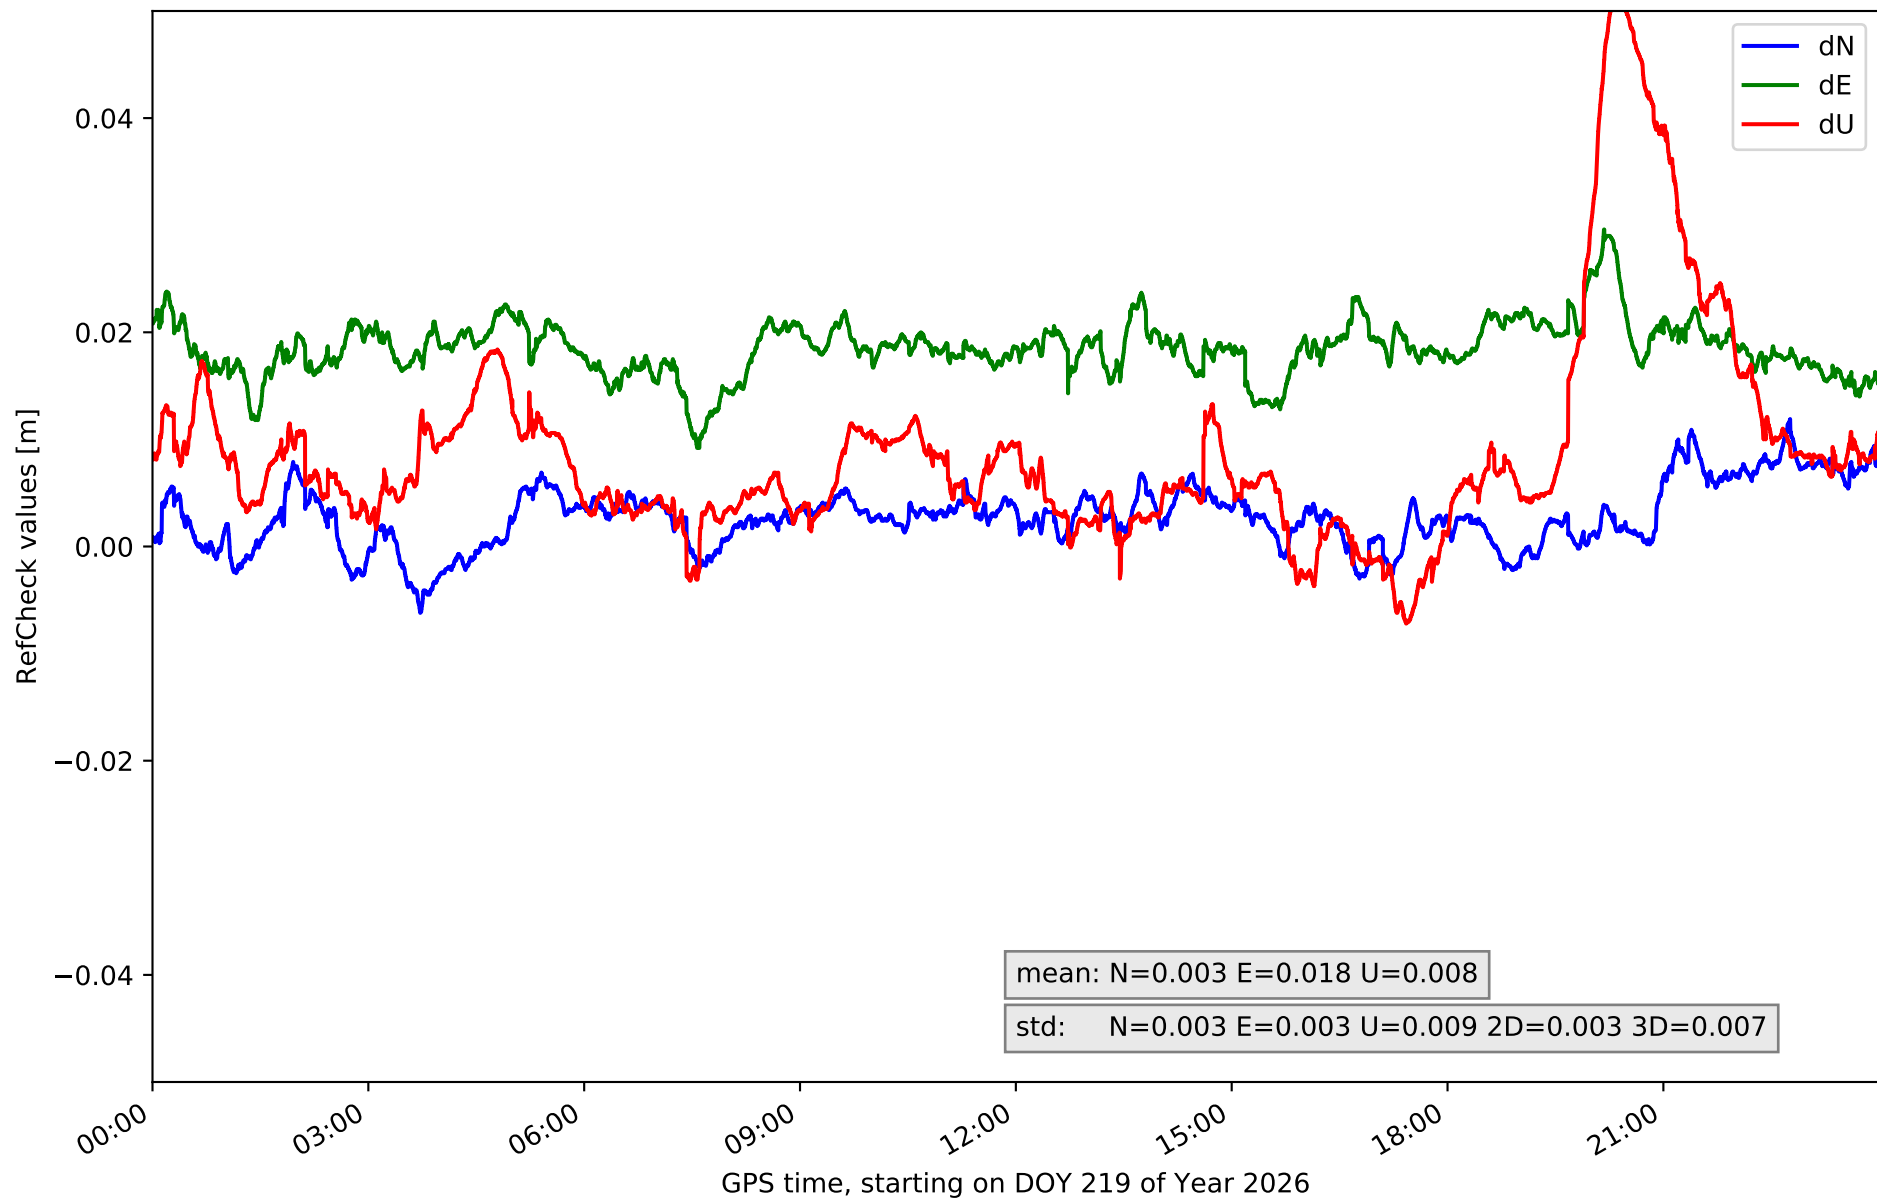


RefCheck for station EH02 in network N32T

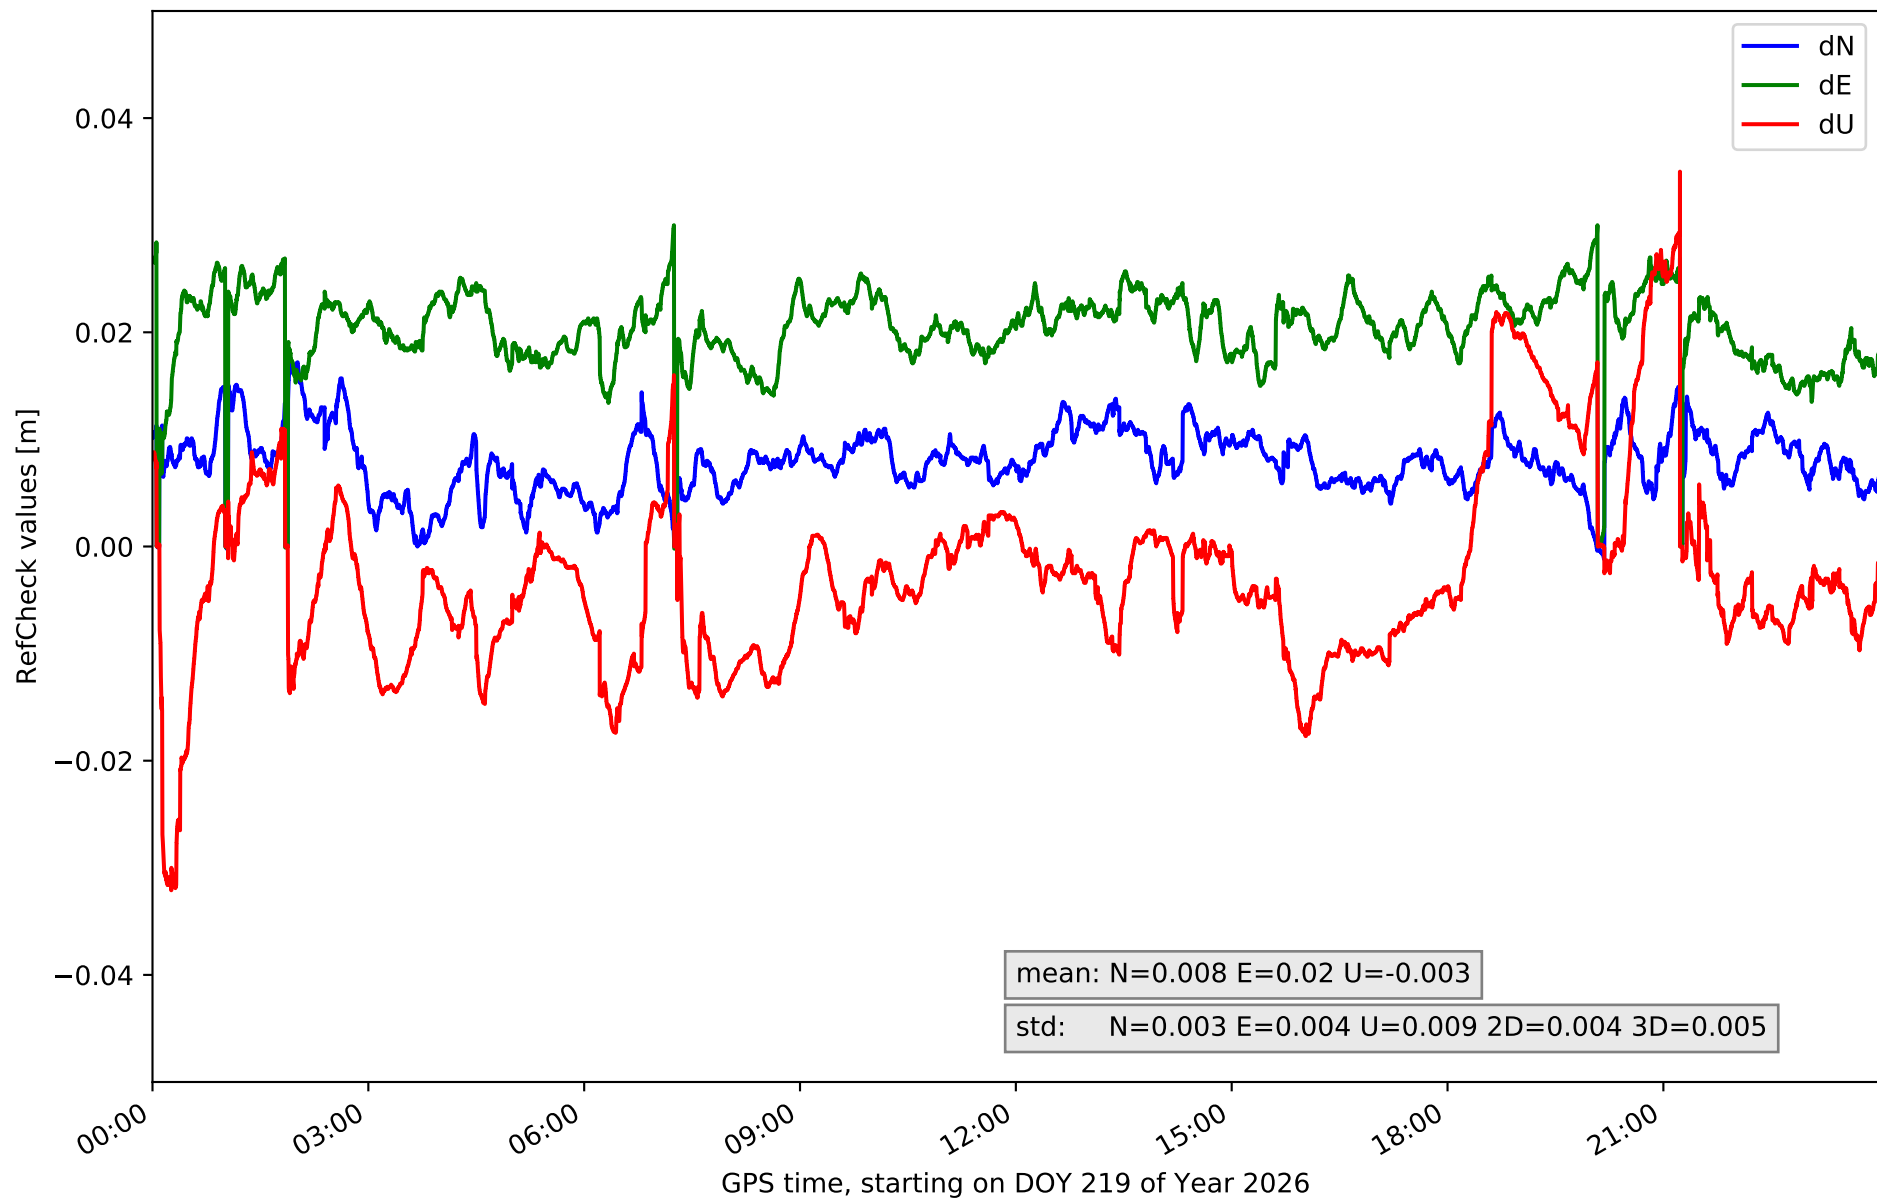


RefCheck for station GOM1 in network N32T

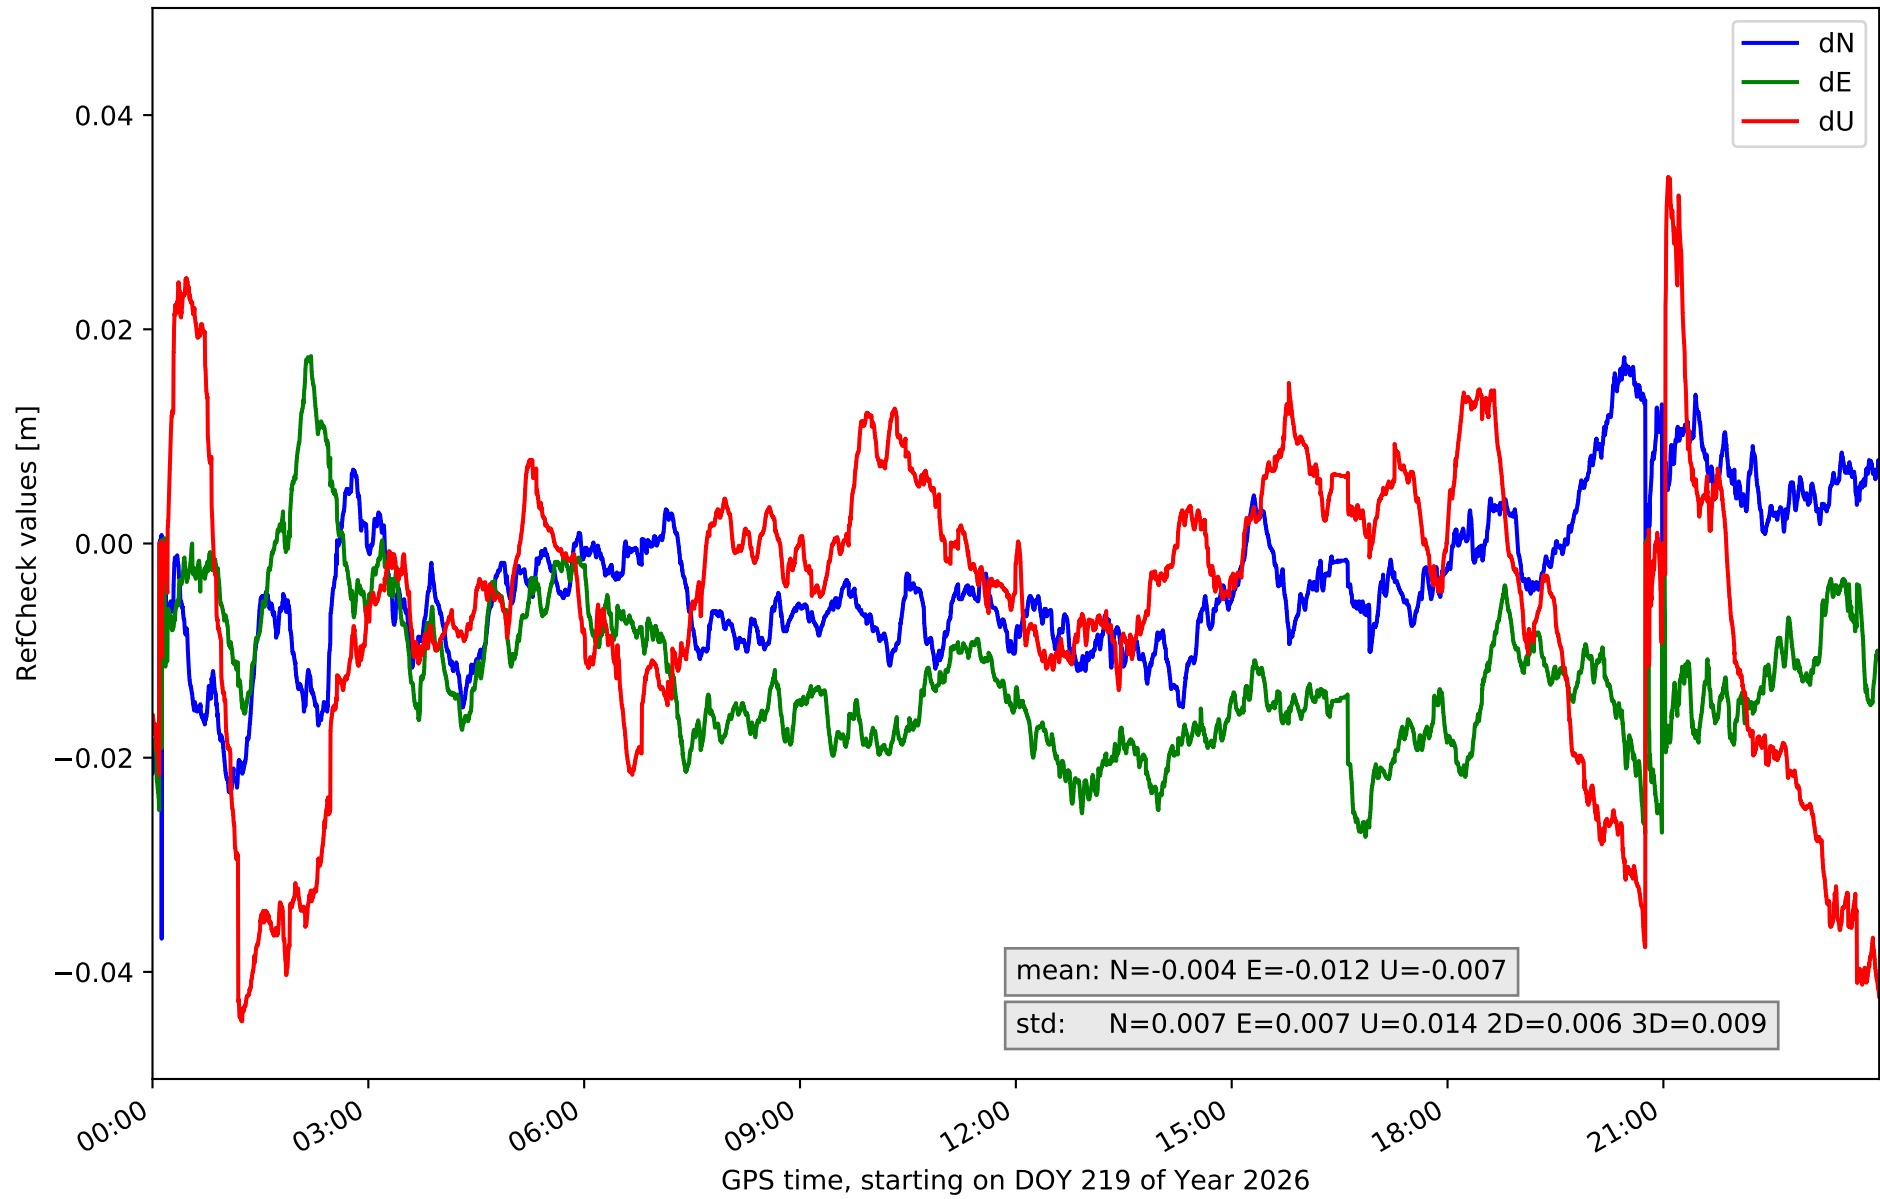


RefCheck for station GOME in network N32T

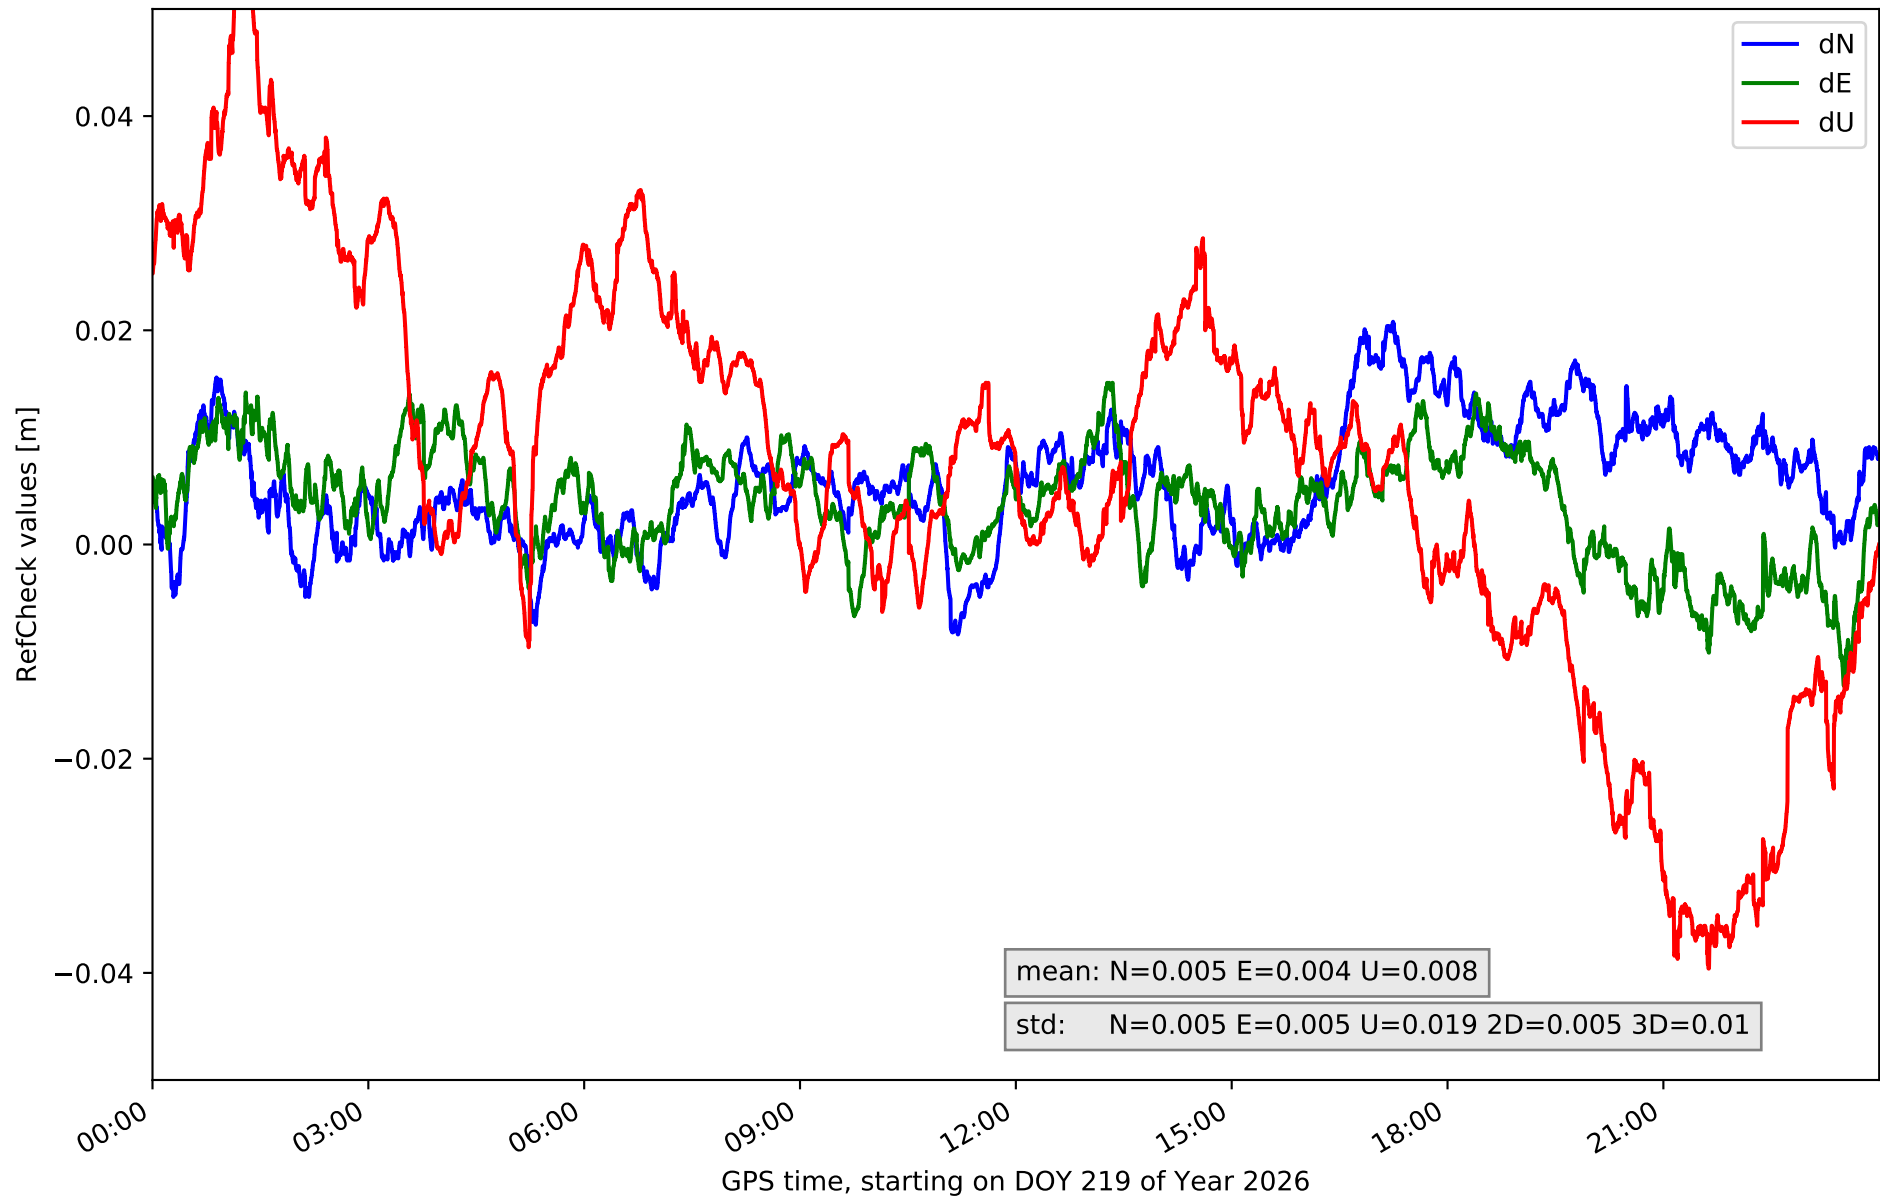


RefCheck for station IZAN in network N32T

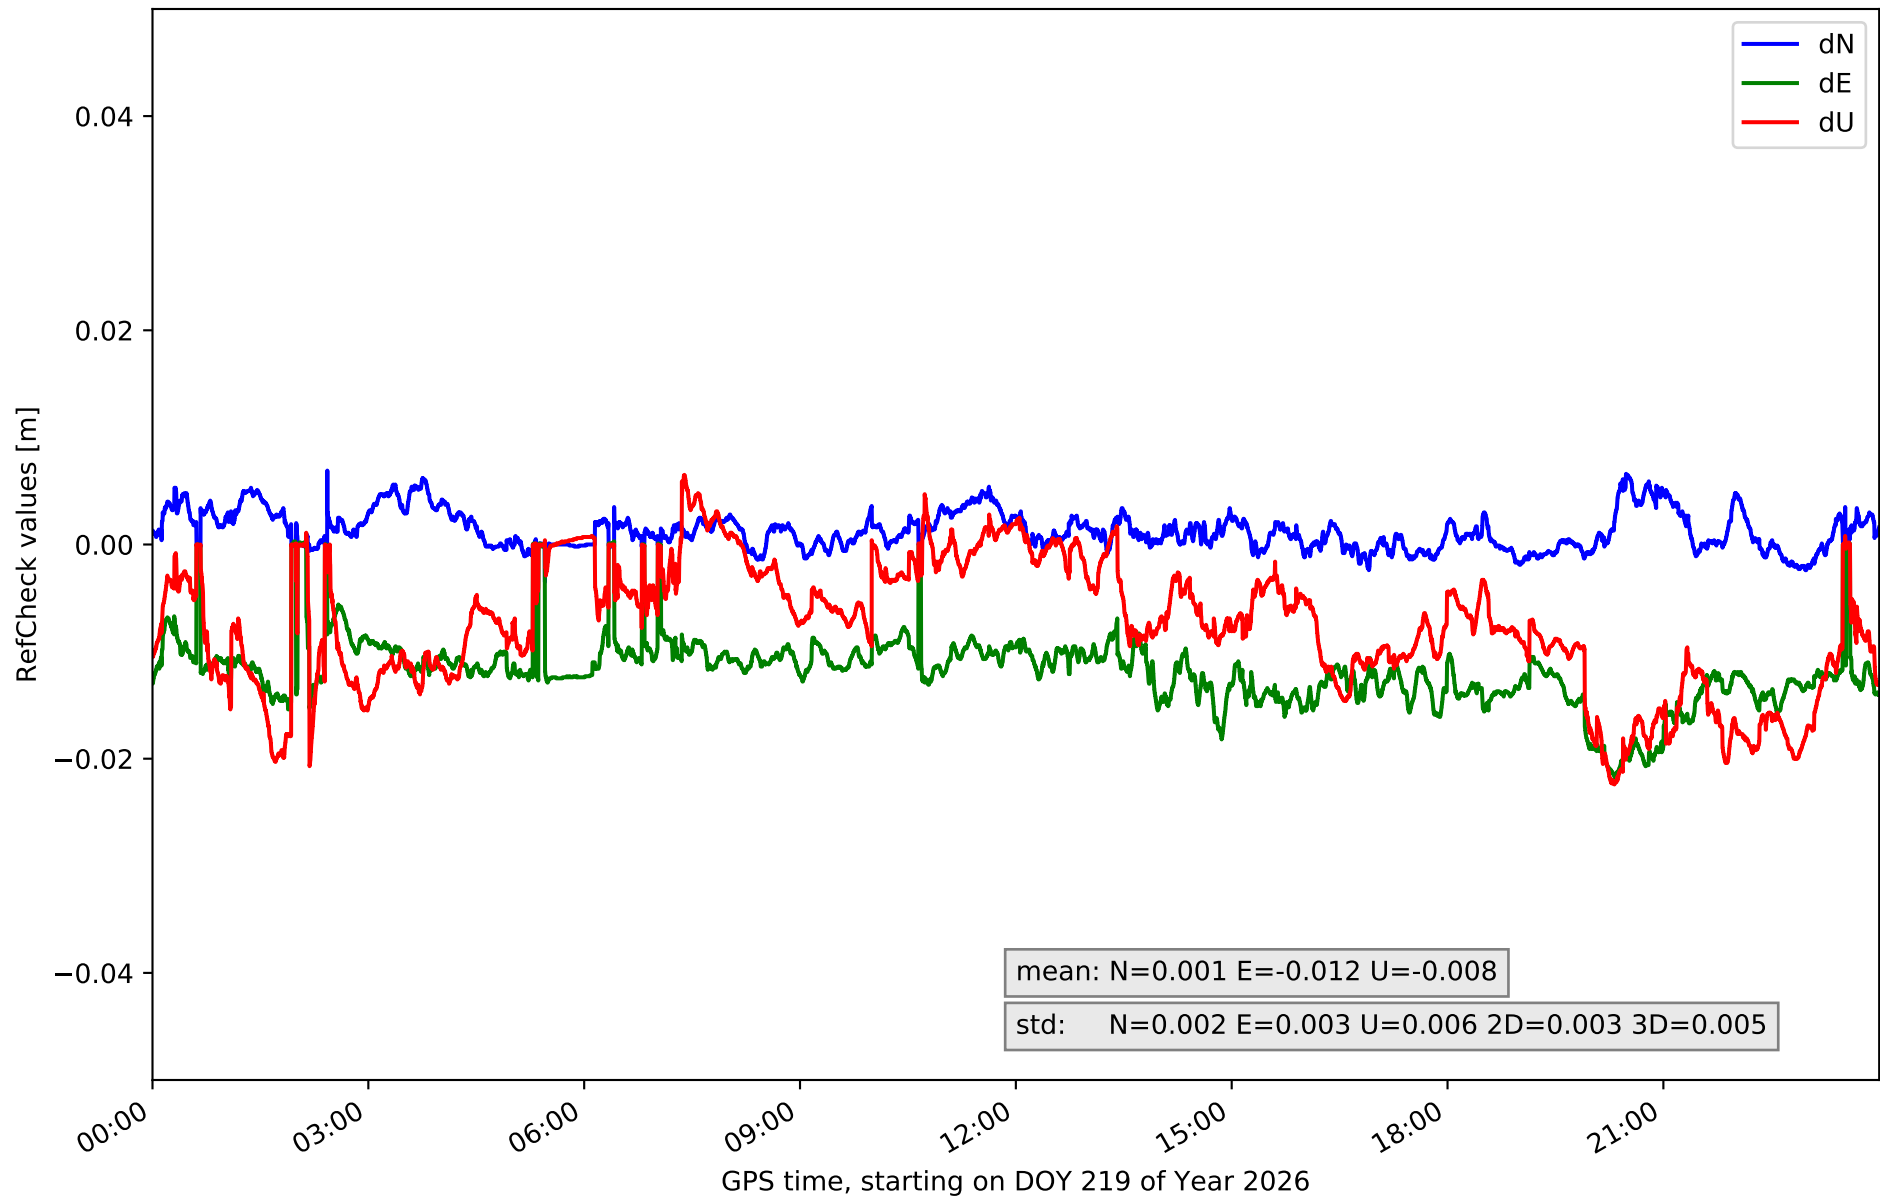


RefCheck for station LP01 in network N32T

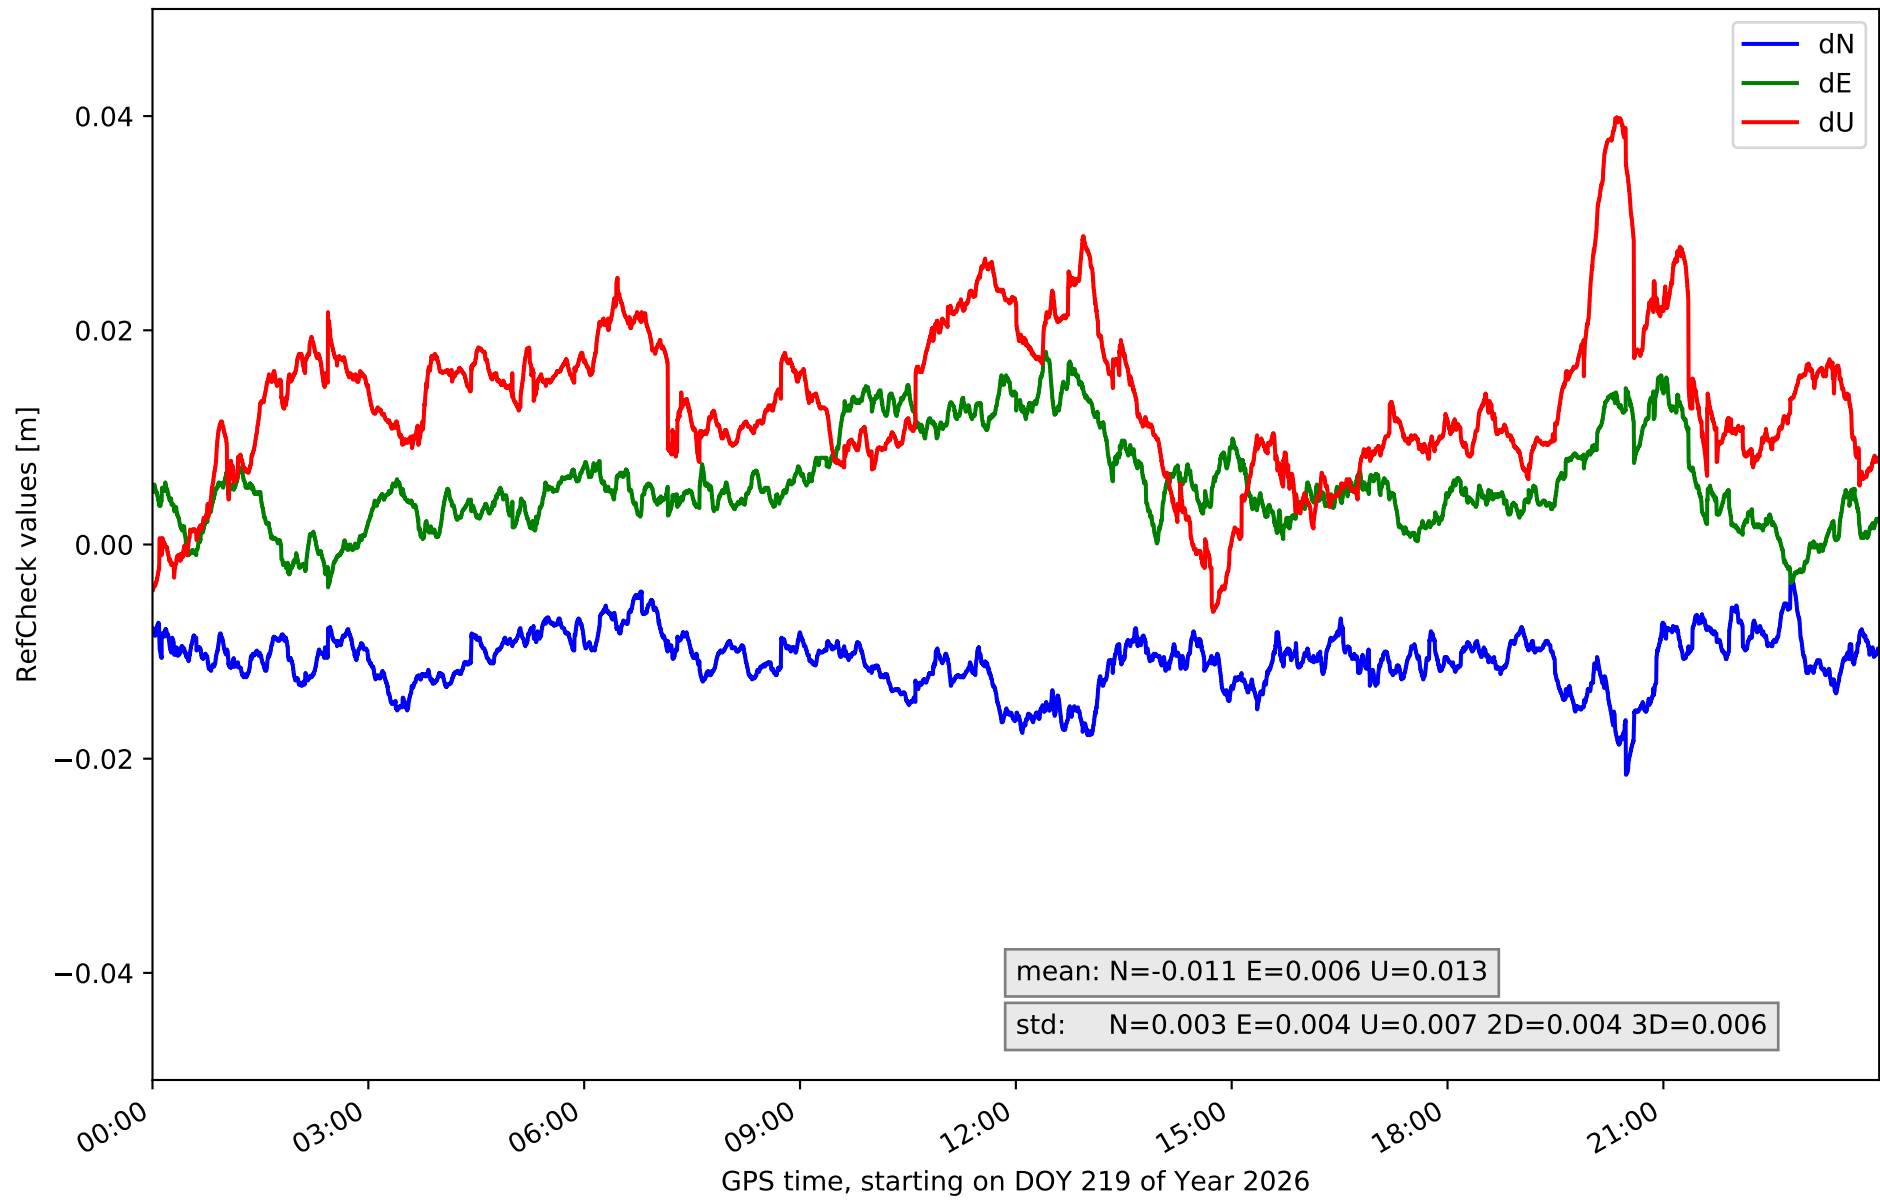


RefCheck for station LP03 in network N32T

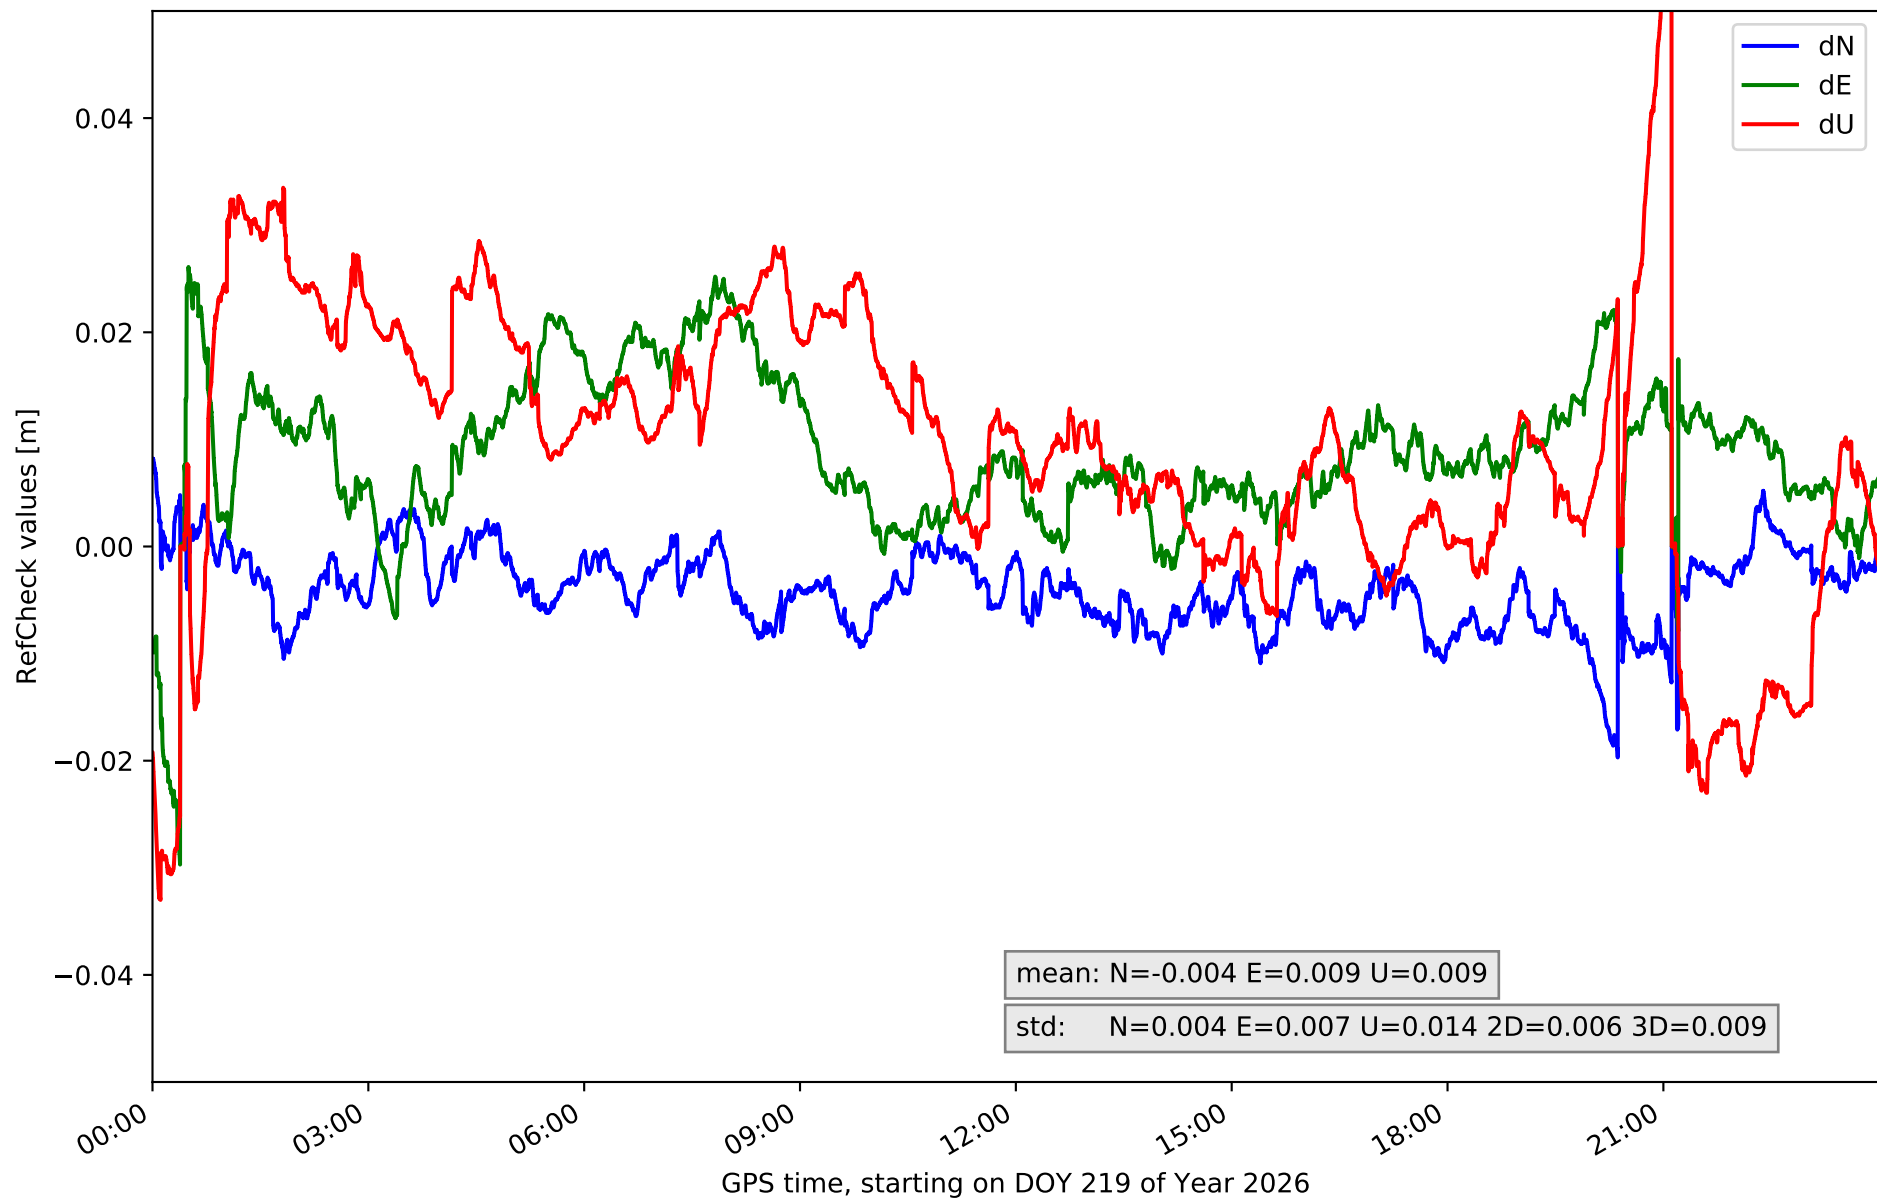


RefCheck for station LPAL in network N32T

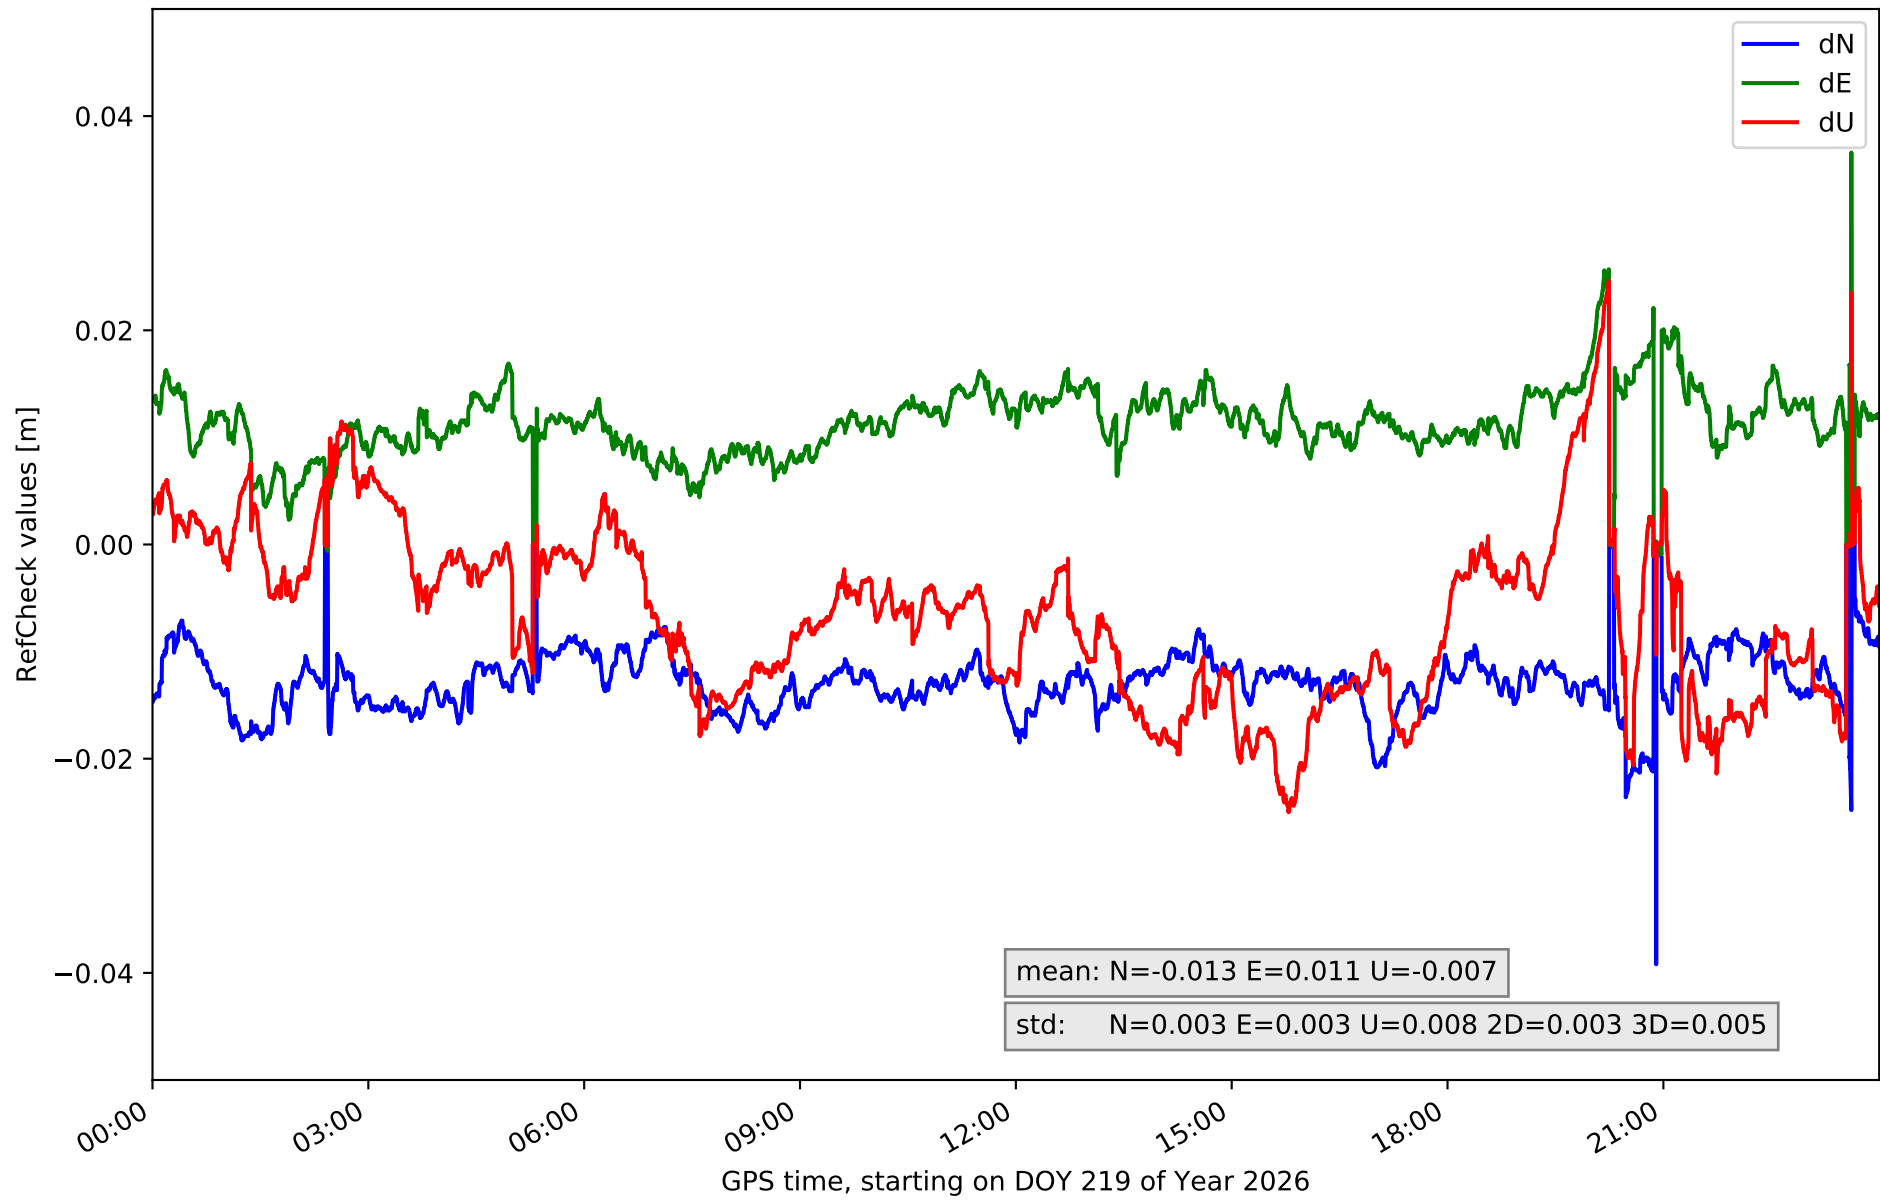


RefCheck for station LRES in network N32T

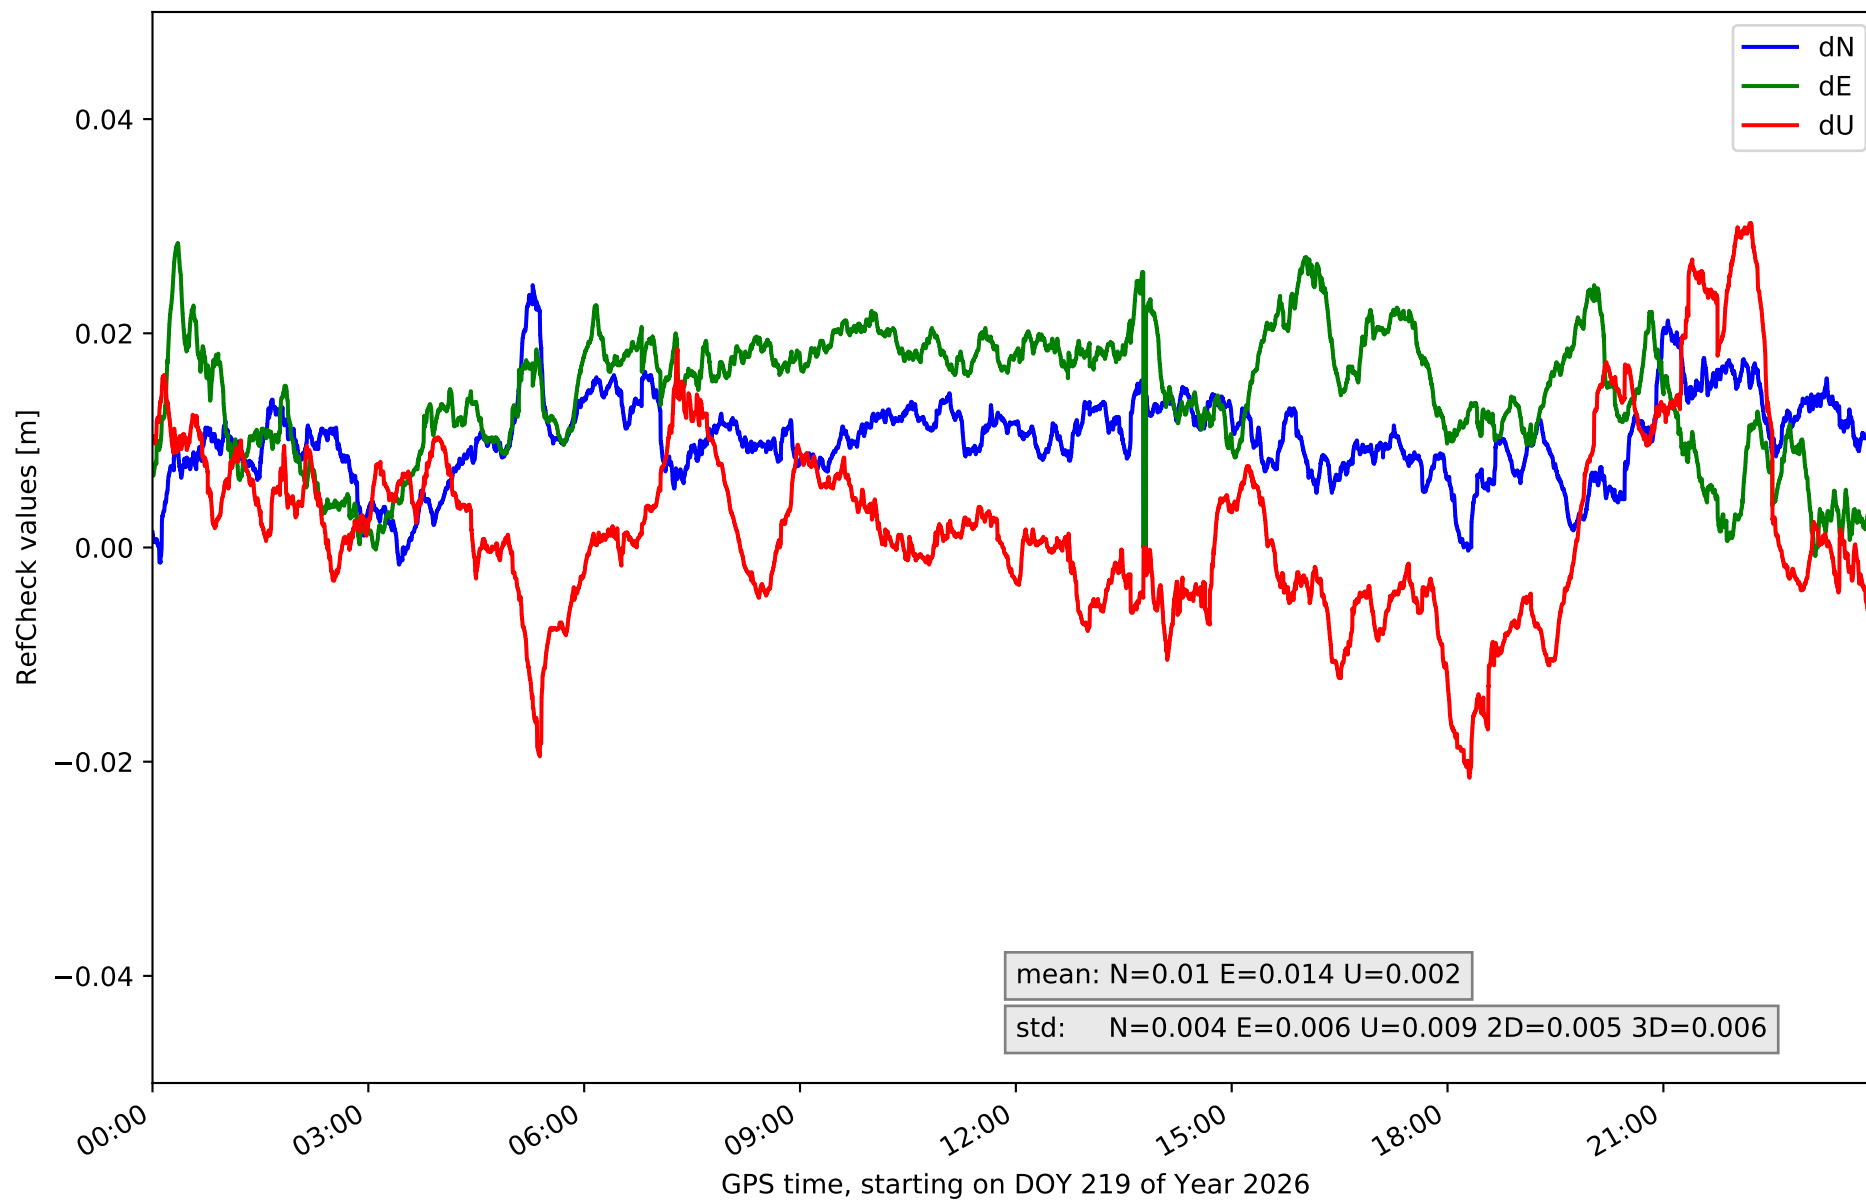


RefCheck for station TN01 in network N32T

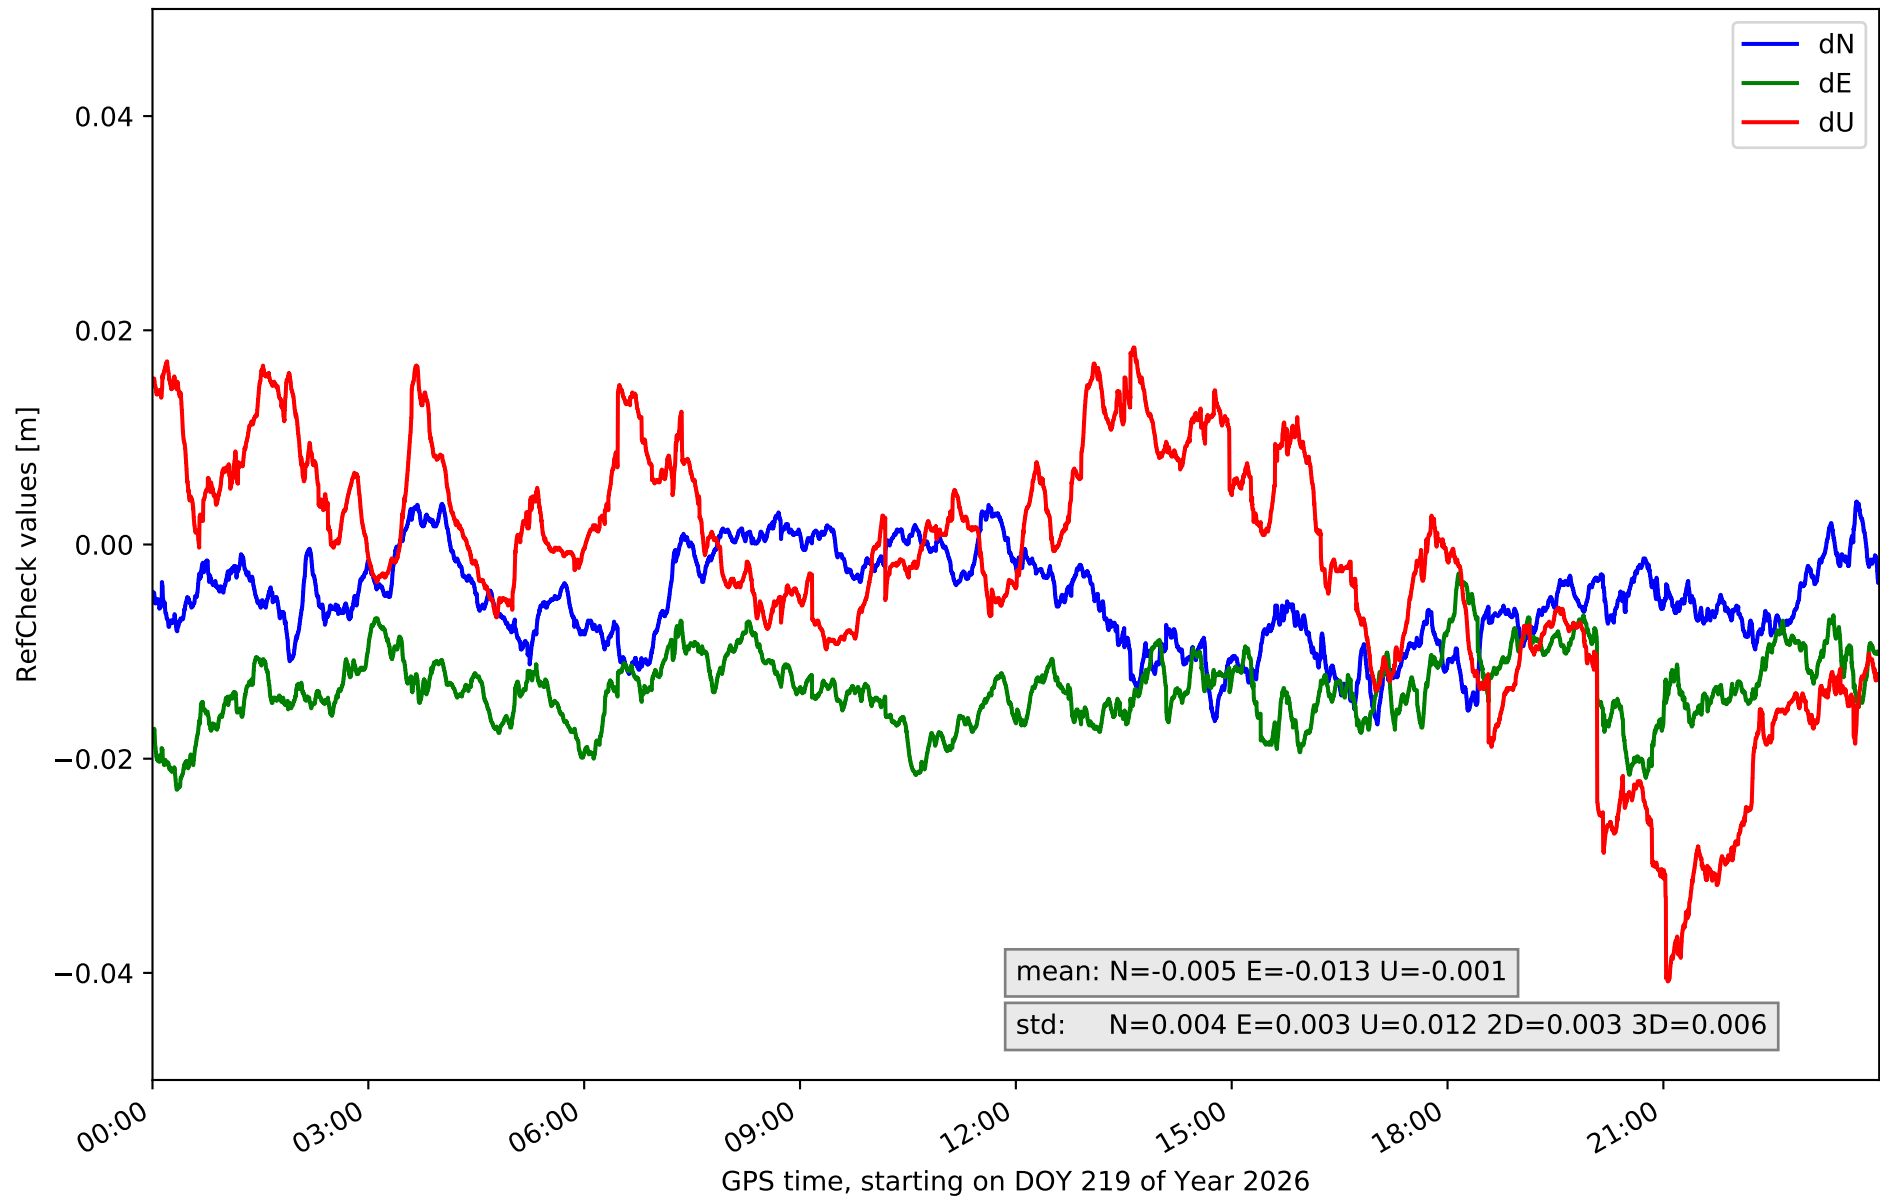


RefCheck for station TN02 in network N32T

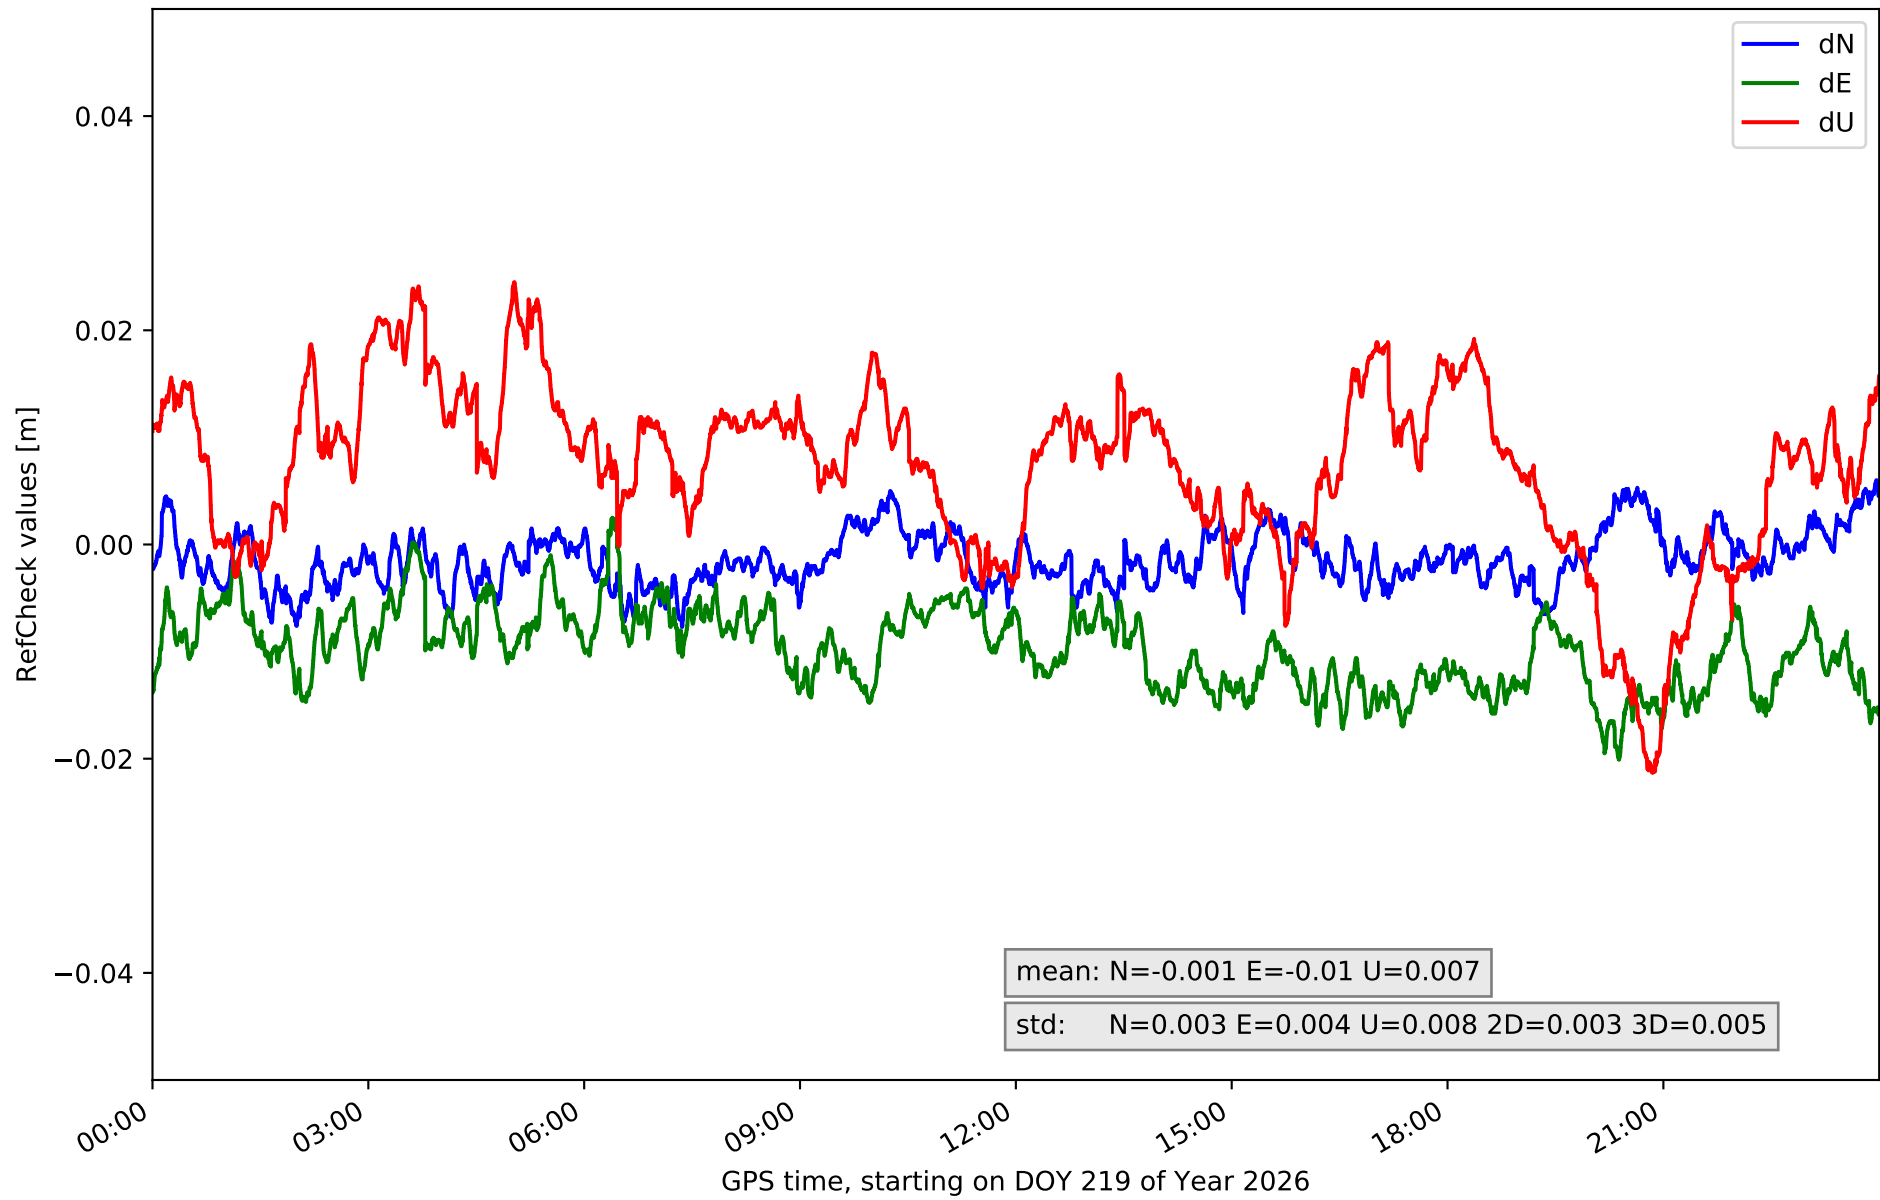


RefCheck for station TN03 in network N32T

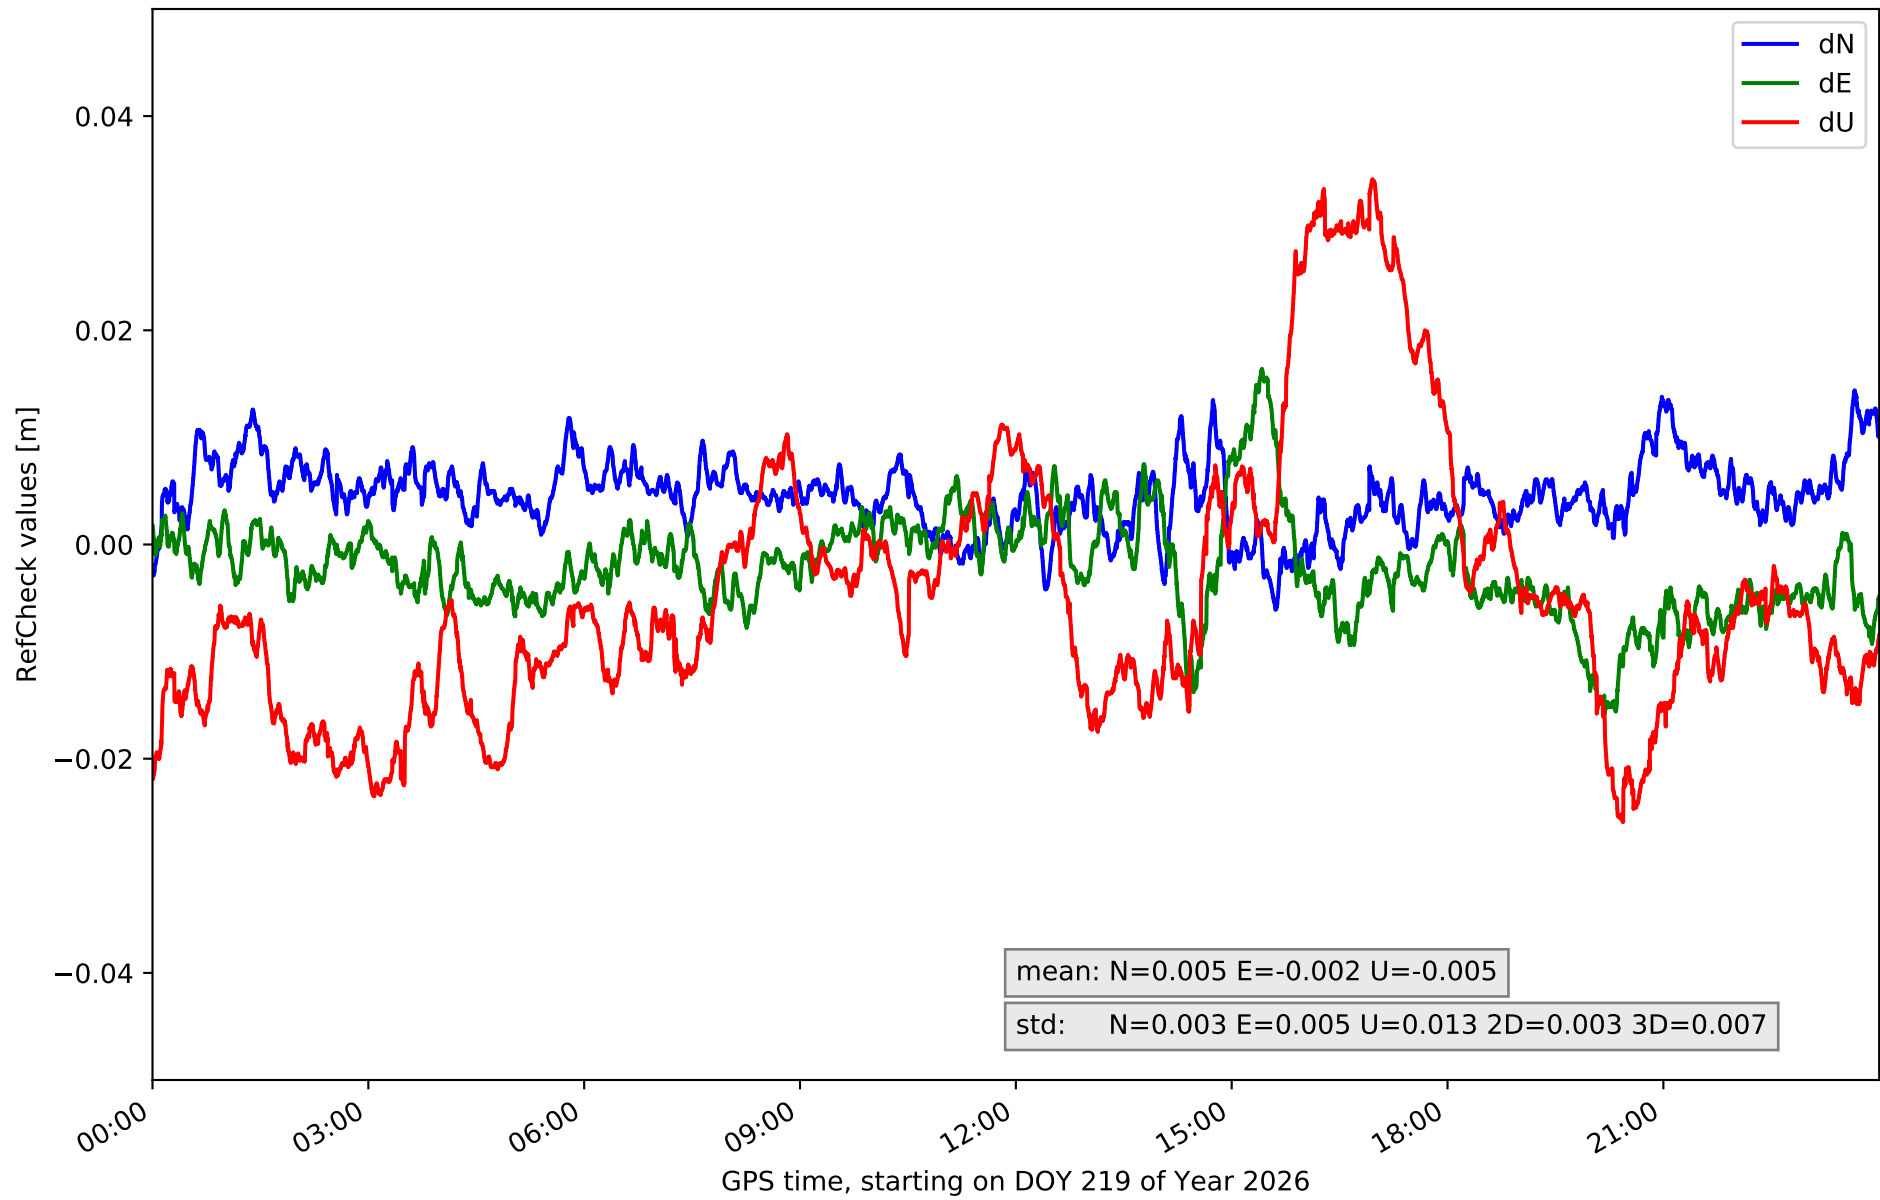


RefCheck for station TN06 in network N32T

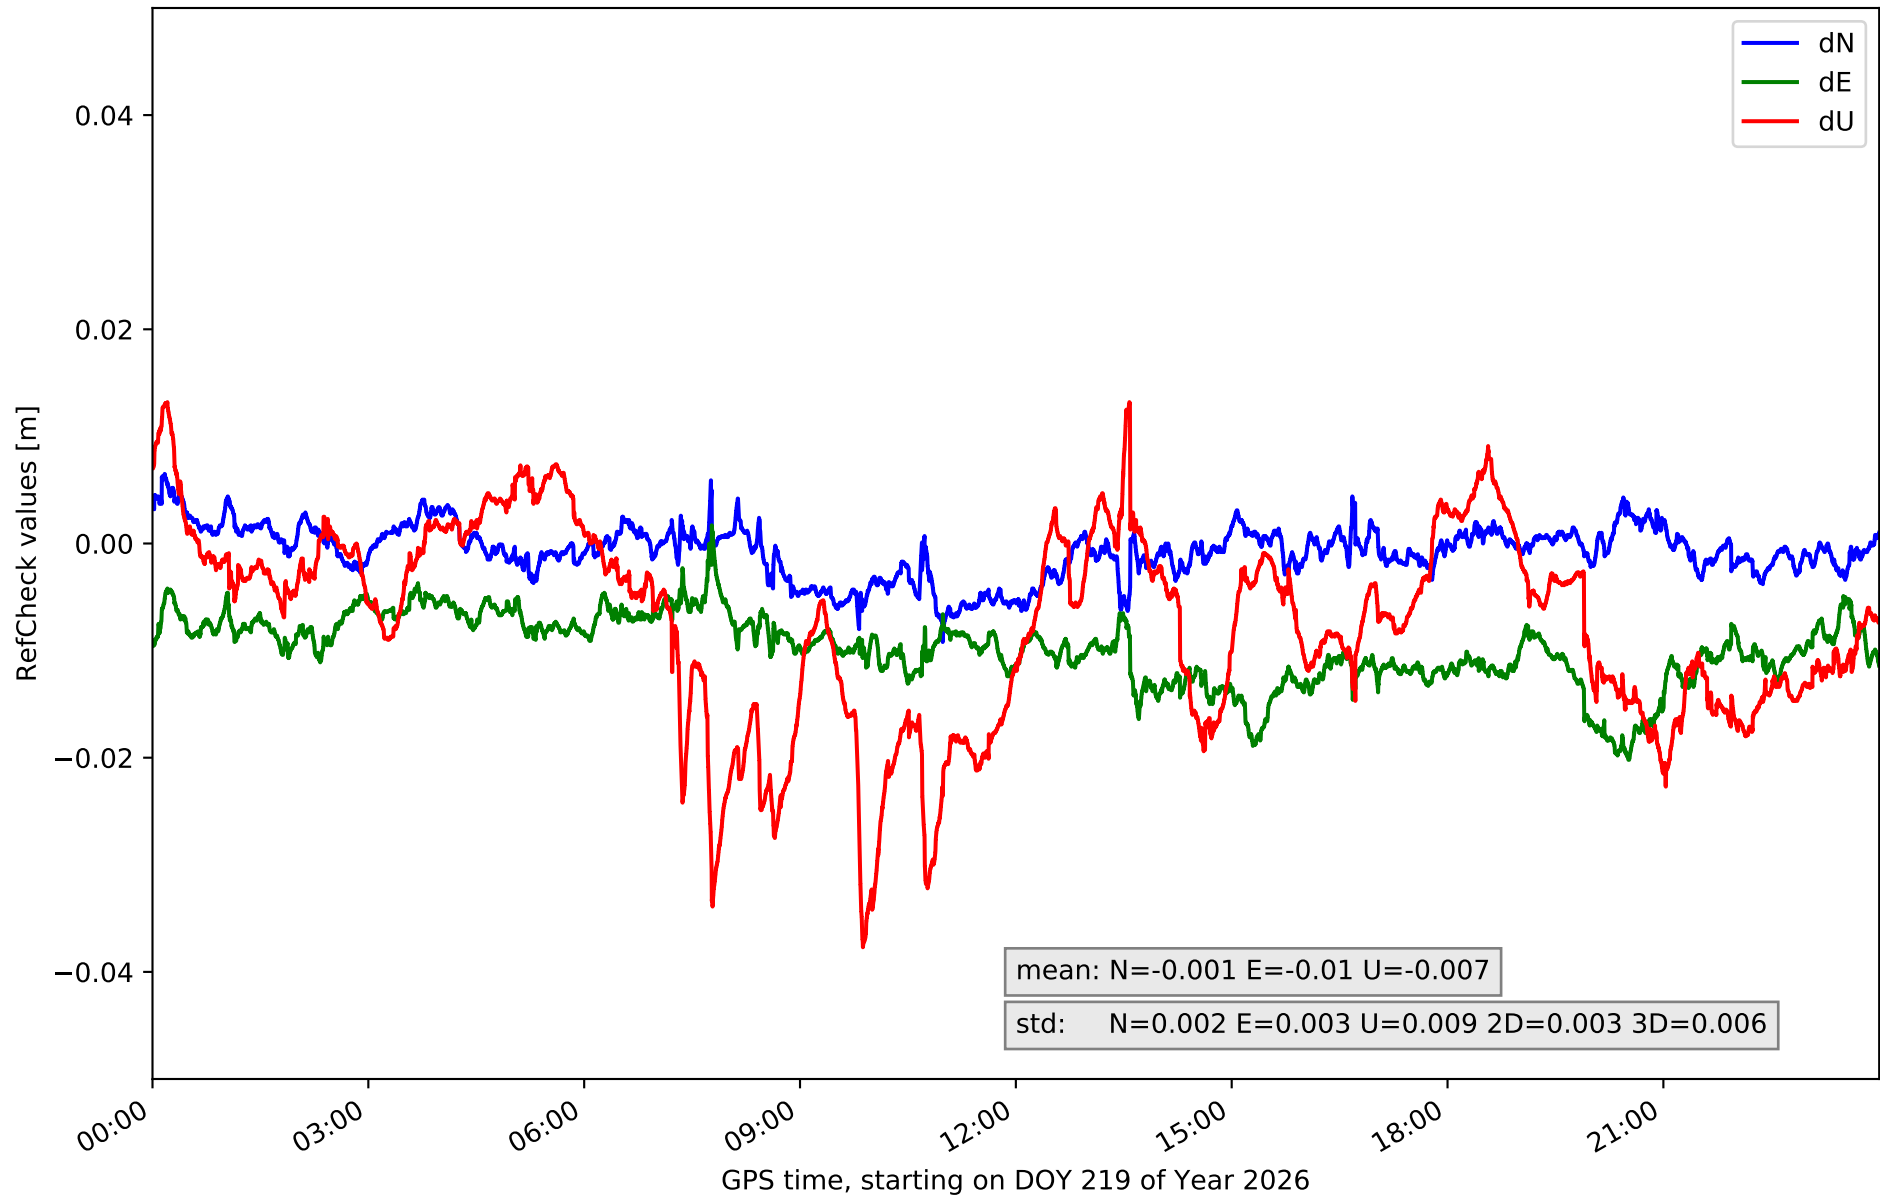

RefCheck for station TN09 in network N32T

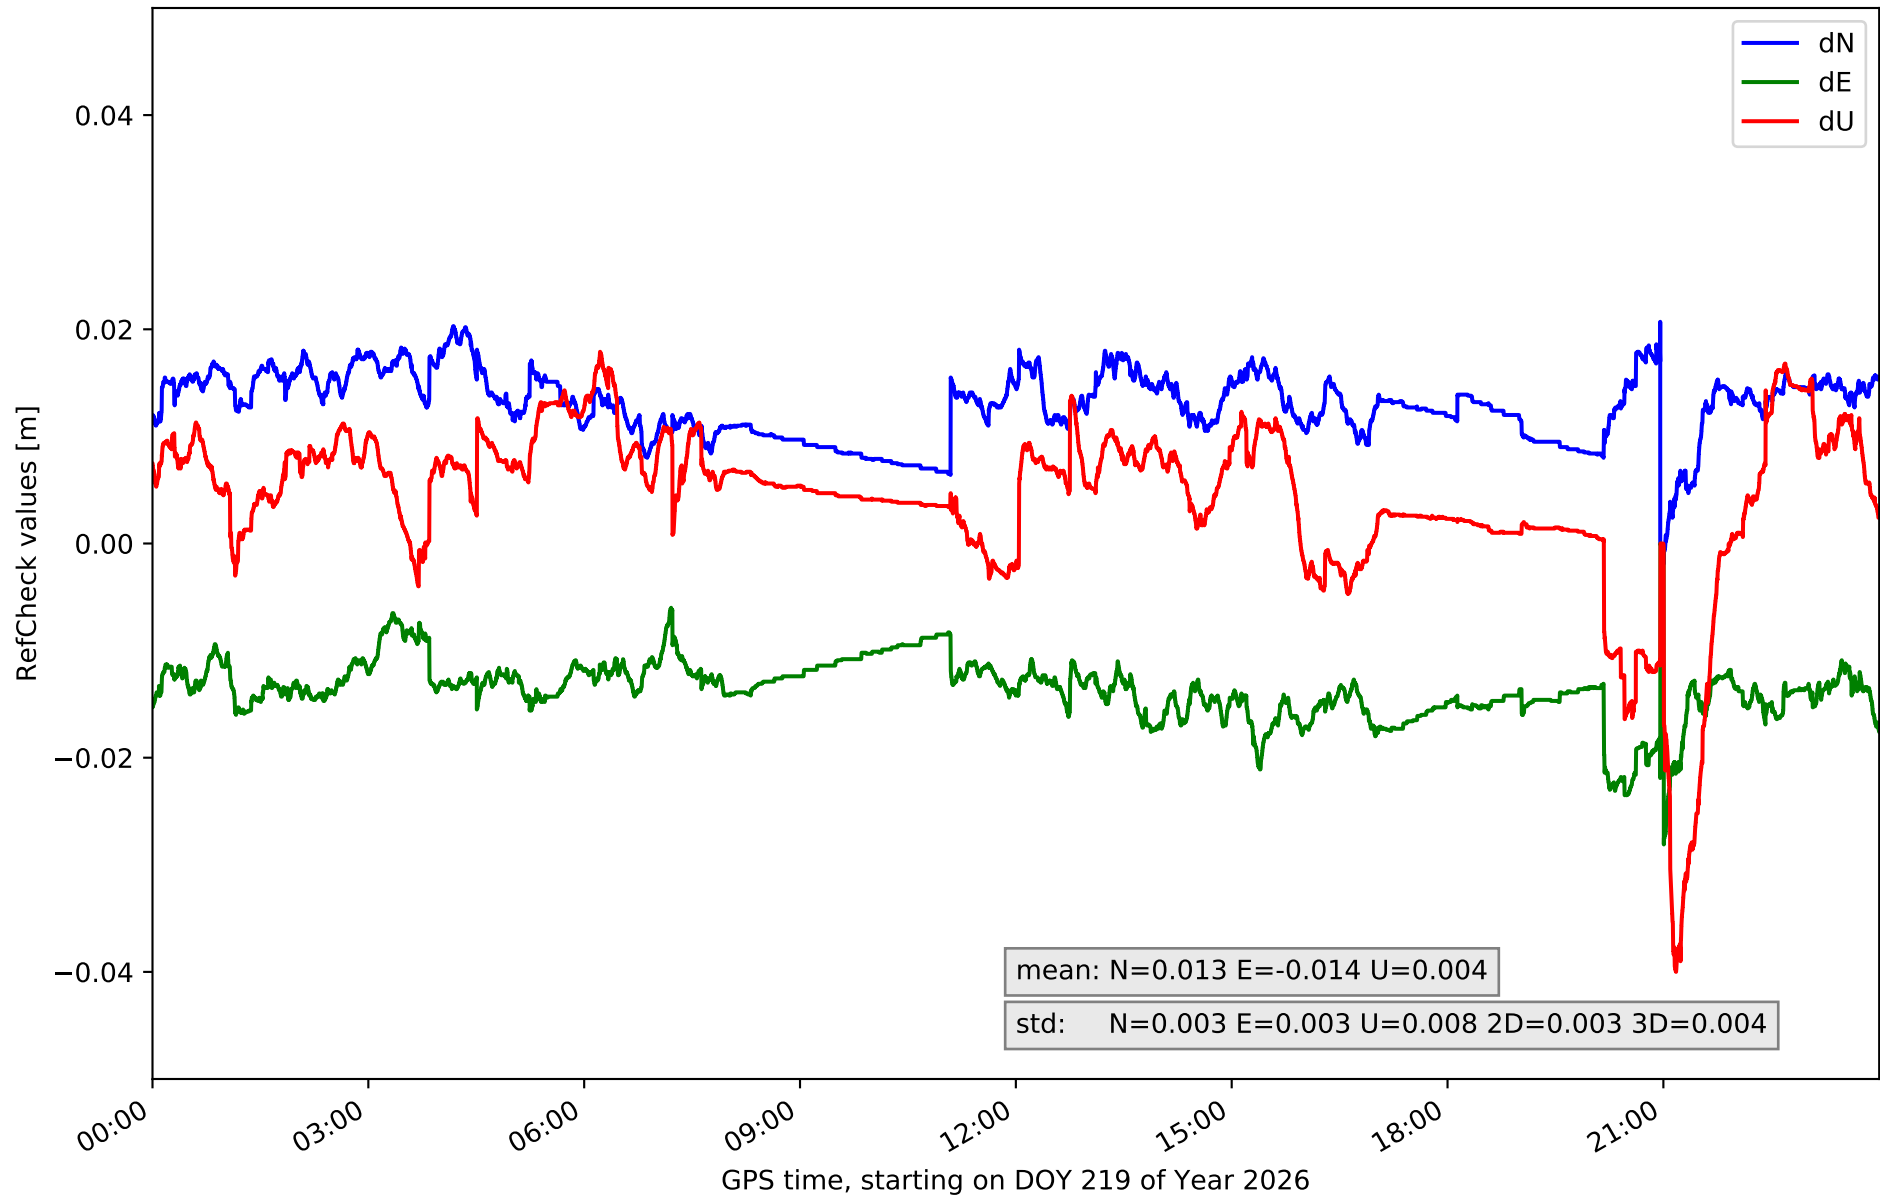

RefCheck for station TE11 in network N32T

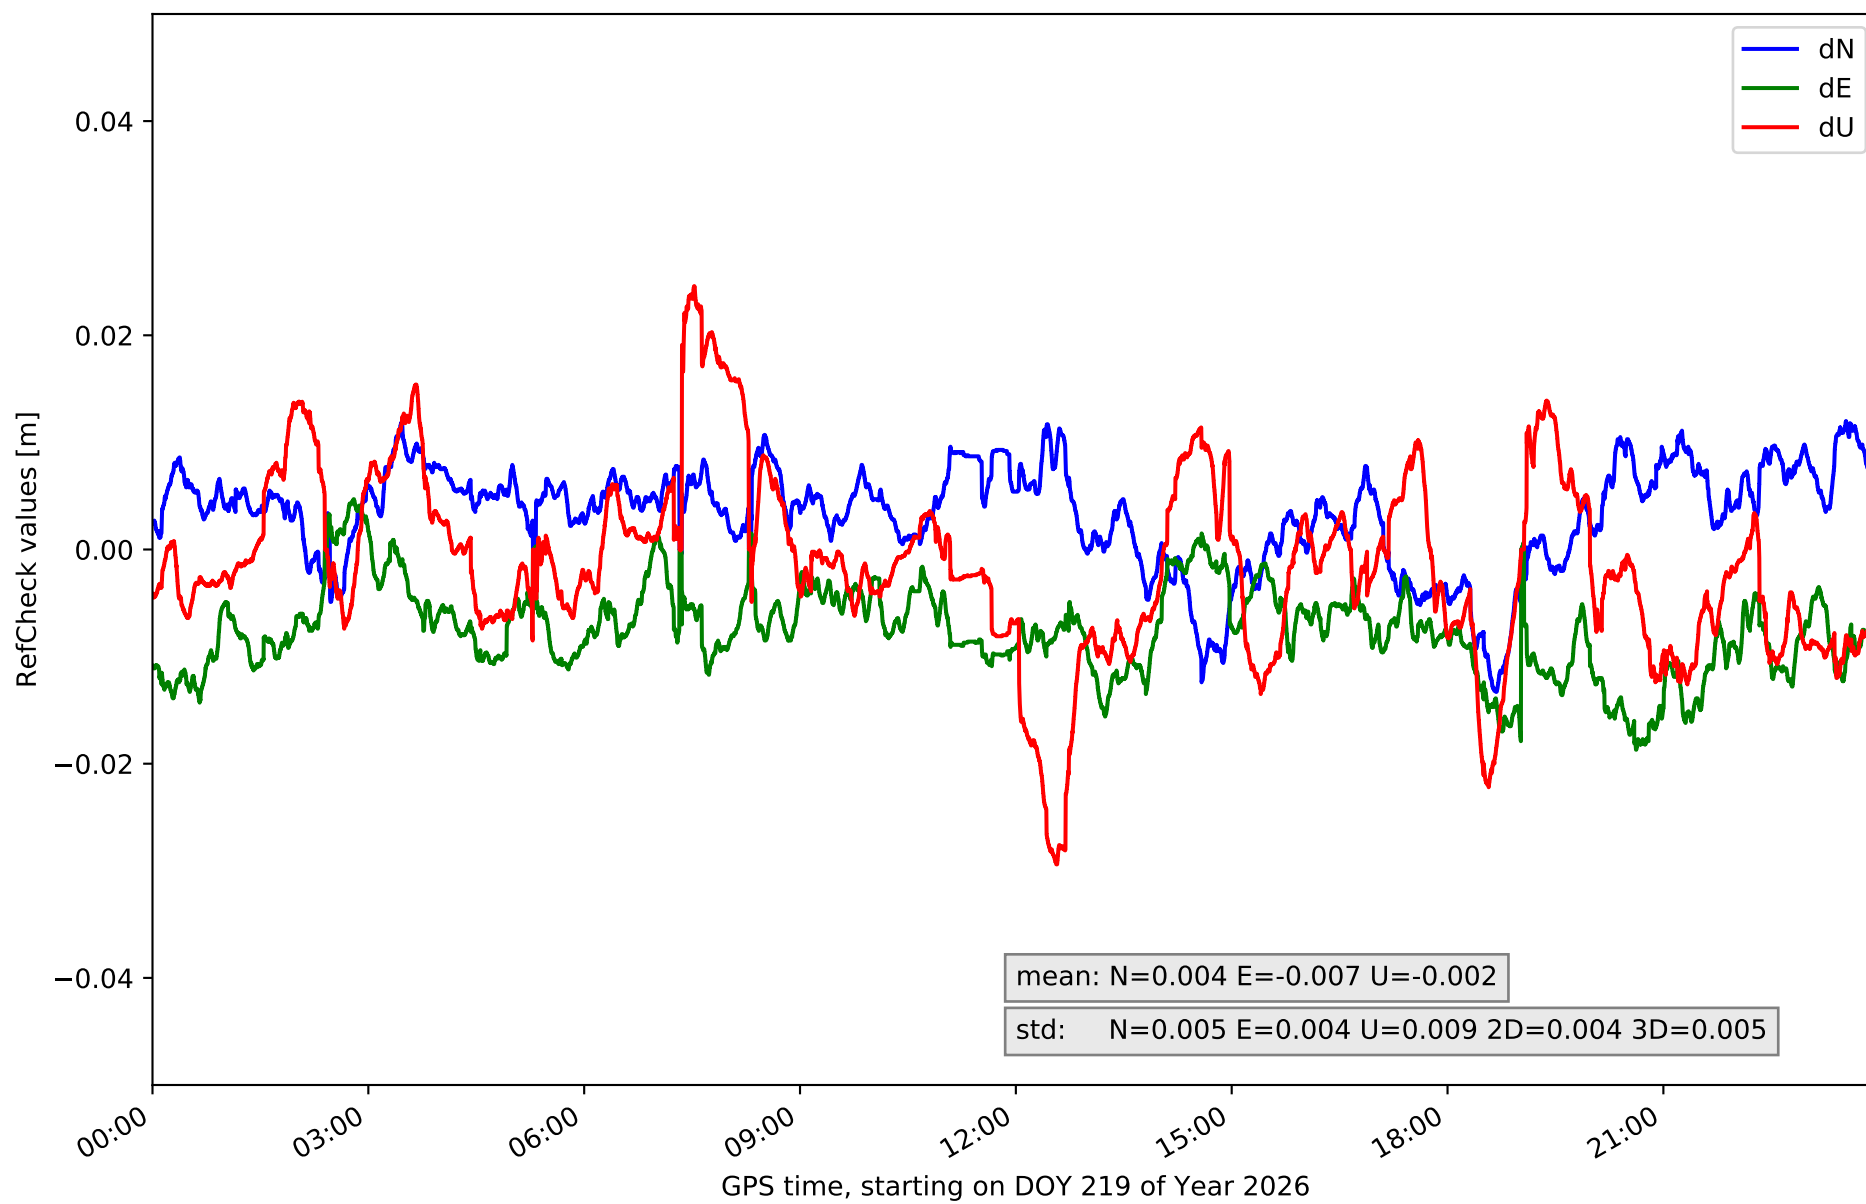

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.006	0.012	0.003	0.009	0.03	0.003	-0.007	0.052	0.009	0.003	0.007	62741	99.7	33854	53.8
EH02	-0.001	0.017	0.003	-0.0	0.03	0.004	-0.032	0.035	0.009	0.004	0.005	62143	98.8	53630	85.3
GOM1	-0.037	0.017	0.007	-0.027	0.018	0.007	-0.045	0.034	0.014	0.006	0.009	47953	76.2	31208	49.6
GOME	-0.008	0.021	0.005	-0.013	0.015	0.005	-0.04	0.057	0.019	0.005	0.01	23219	36.9	27534	43.8
IZAN	-0.004	0.007	0.002	-0.022	0.0	0.003	-0.022	0.006	0.006	0.003	0.005	51426	81.8	8570	13.6
LP01	-0.021	-0.003	0.003	-0.004	0.018	0.004	-0.006	0.04	0.007	0.004	0.006	47513	75.5	21123	33.6
LP03	-0.02	0.008	0.004	-0.03	0.026	0.007	-0.033	0.06	0.014	0.006	0.009	32239	51.3	26829	42.7
LPAL	-0.039	0.0	0.003	-0.002	0.037	0.003	-0.025	0.025	0.008	0.003	0.005	61908	98.4	30871	49.1
LRES	-0.002	0.025	0.004	-0.001	0.028	0.006	-0.021	0.03	0.009	0.005	0.006	59042	93.9	36956	58.8
TN01	-0.017	0.004	0.004	-0.023	-0.003	0.003	-0.041	0.018	0.012	0.003	0.006	57902	92.1	20444	32.5
TN02	-0.008	0.006	0.003	-0.02	0.003	0.004	-0.021	0.025	0.008	0.003	0.005	32097	51.0	9220	14.7
TN03	-0.006	0.014	0.003	-0.016	0.016	0.005	-0.026	0.034	0.013	0.003	0.007	9039	14.4	11661	18.5
TN06	-0.009	0.006	0.002	-0.02	0.002	0.003	-0.038	0.013	0.009	0.003	0.006	32044	50.9	11919	18.9
TN09	-0.002	0.021	0.003	-0.028	-0.0	0.003	-0.04	0.018	0.008	0.003	0.004	62778	99.8	36663	58.3
TE11	-0.013	0.012	0.005	-0.019	0.005	0.004	-0.029	0.025	0.009	0.004	0.005	27346	43.5	5604	8.9
Mean	-0.013	0.011	0.004	-0.014	0.015	0.004	-0.028	0.031	0.01	0.004	0.006	44626.0	70.9	24405.7	38.8
Min/Max	-0.039	0.025	0.007	-0.03	0.037	0.007	-0.045	0.06	0.019	0.006	0.01	62778	99.8	53630	85.3

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	93.9	93.3	93.7	95.1	93.4
considering satellites with dual-frequency fixed	91.4	91.2	90.2	92.7	90.8
considering all signals separately	91.6	91.2	90.2	93.2	90.5