

summary for network NT32

timeperiod chosen: from 2026-08-20-00:00:00 until 2026-08-20-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.1 seconds


average fixing percentage with threshold set to 0.3: 94.5 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

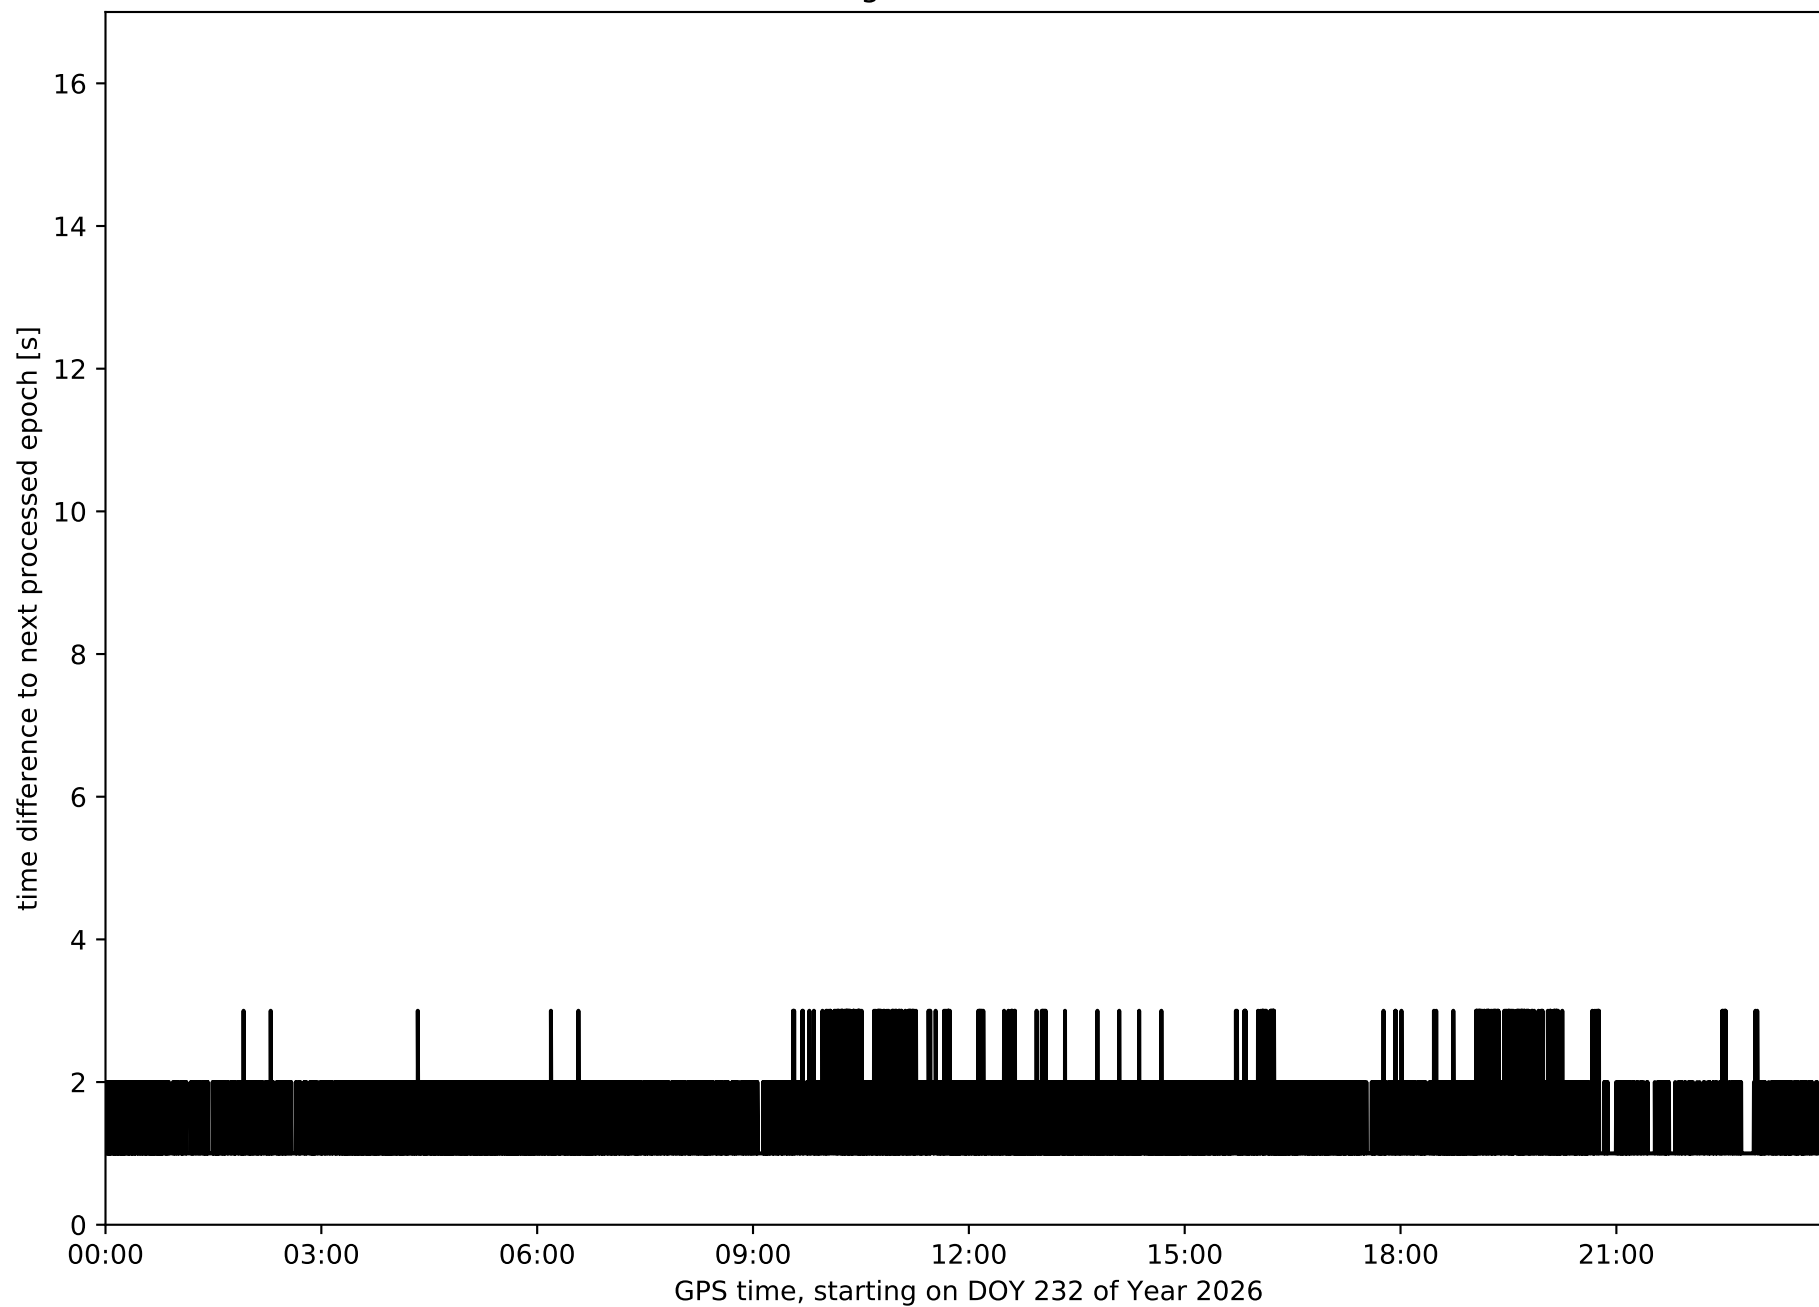


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

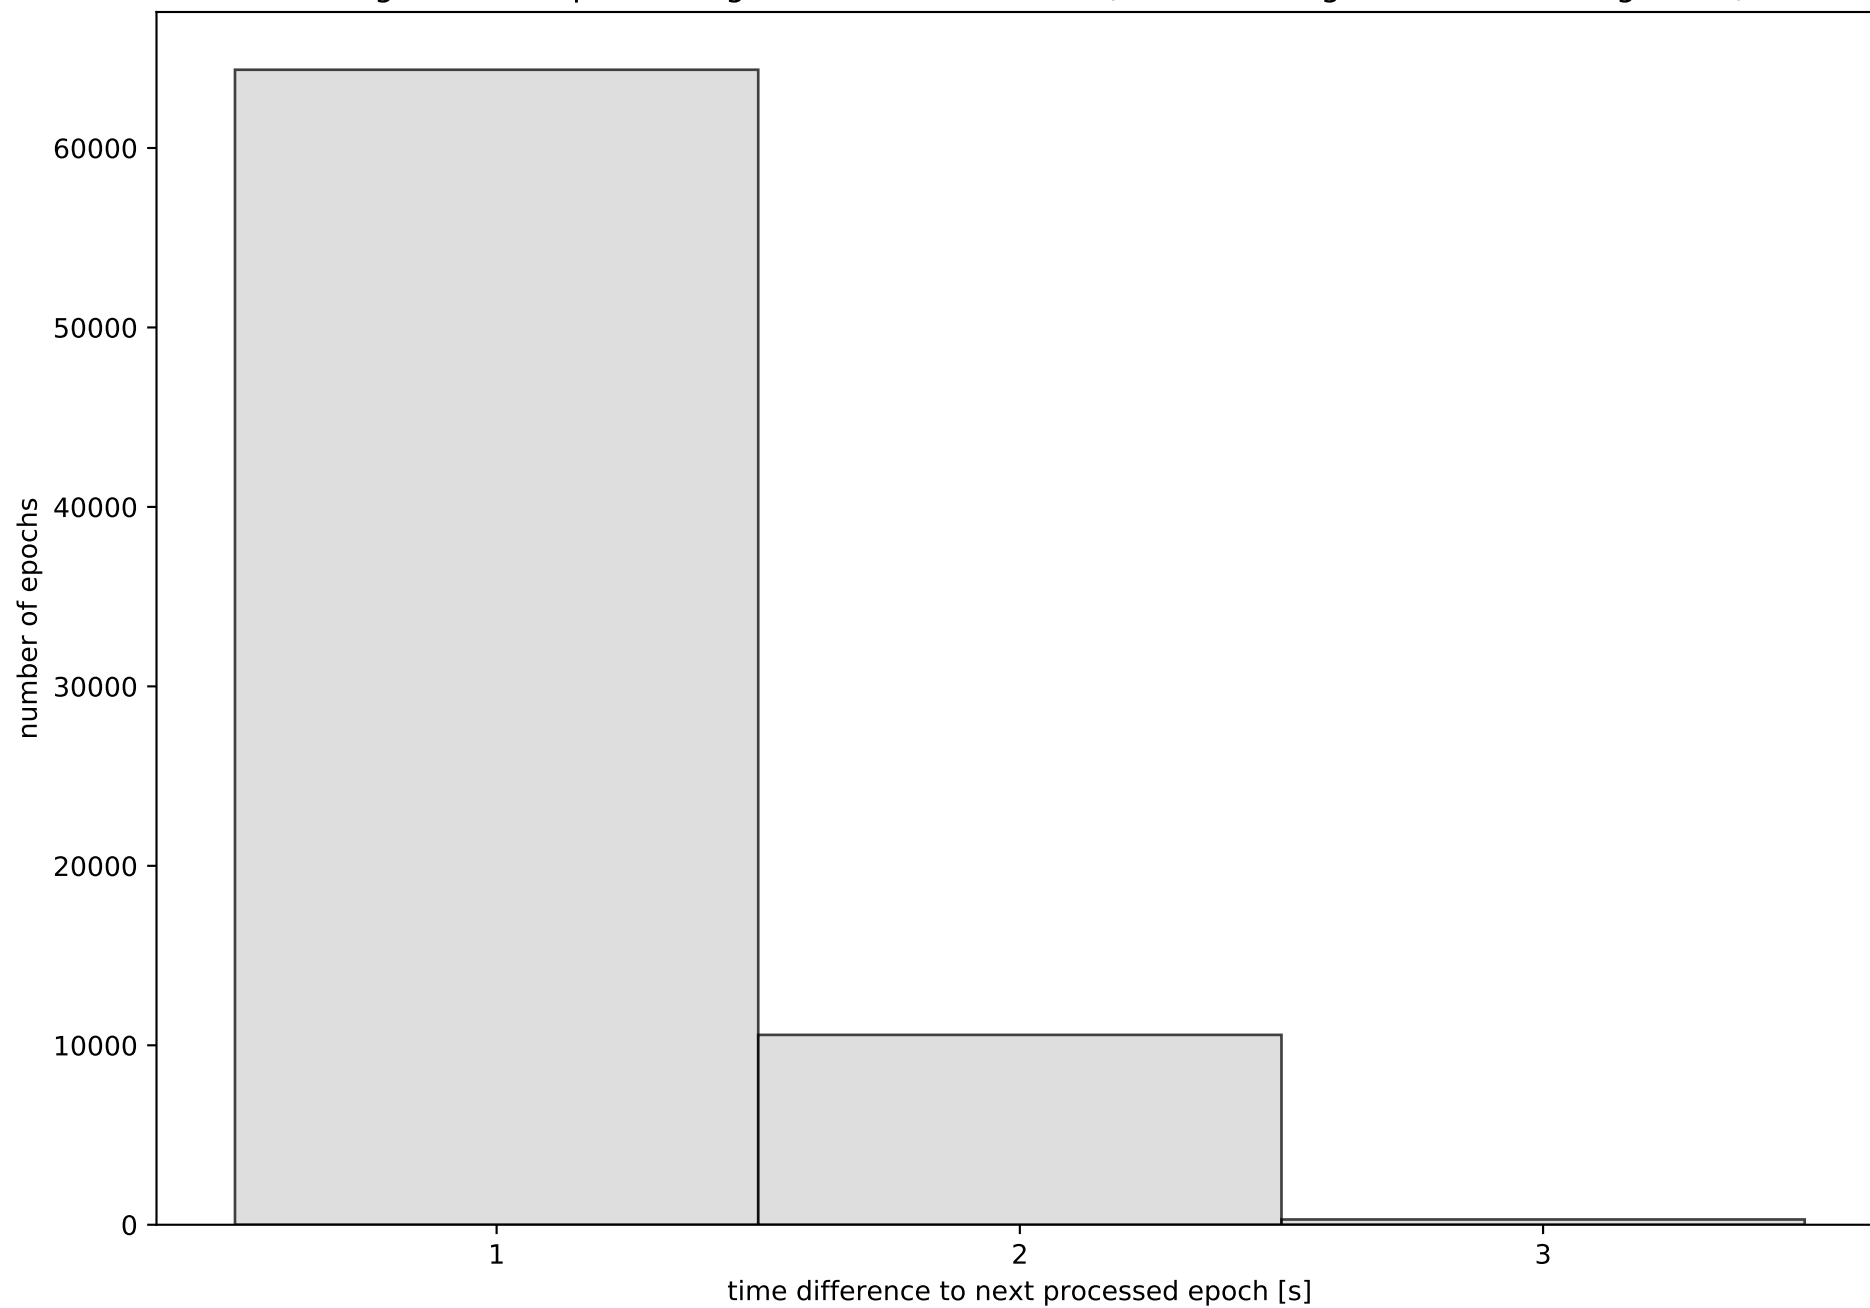


Network NT32 with threshold set to 0.3

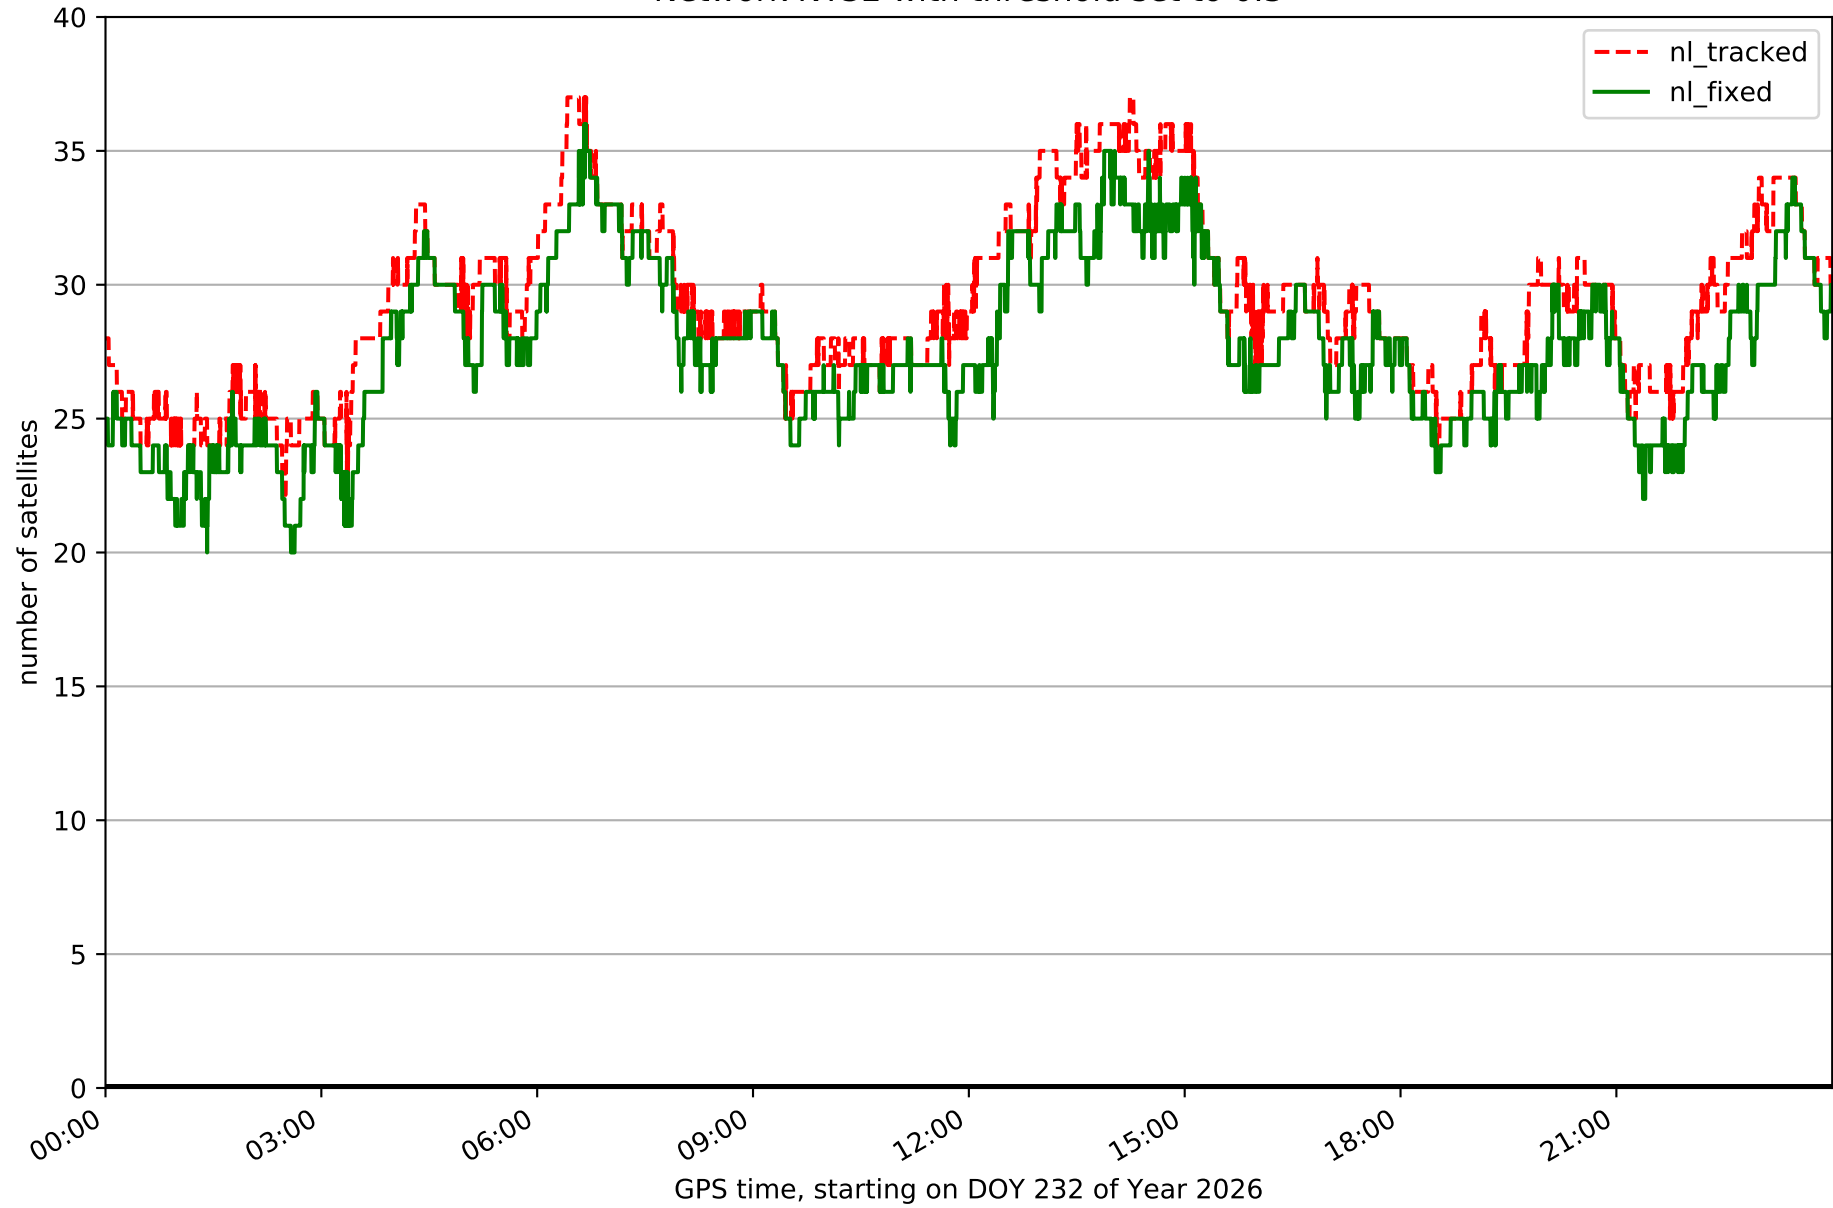


Fixing percentage of satellites in network NT32 with threshold set to 0.3

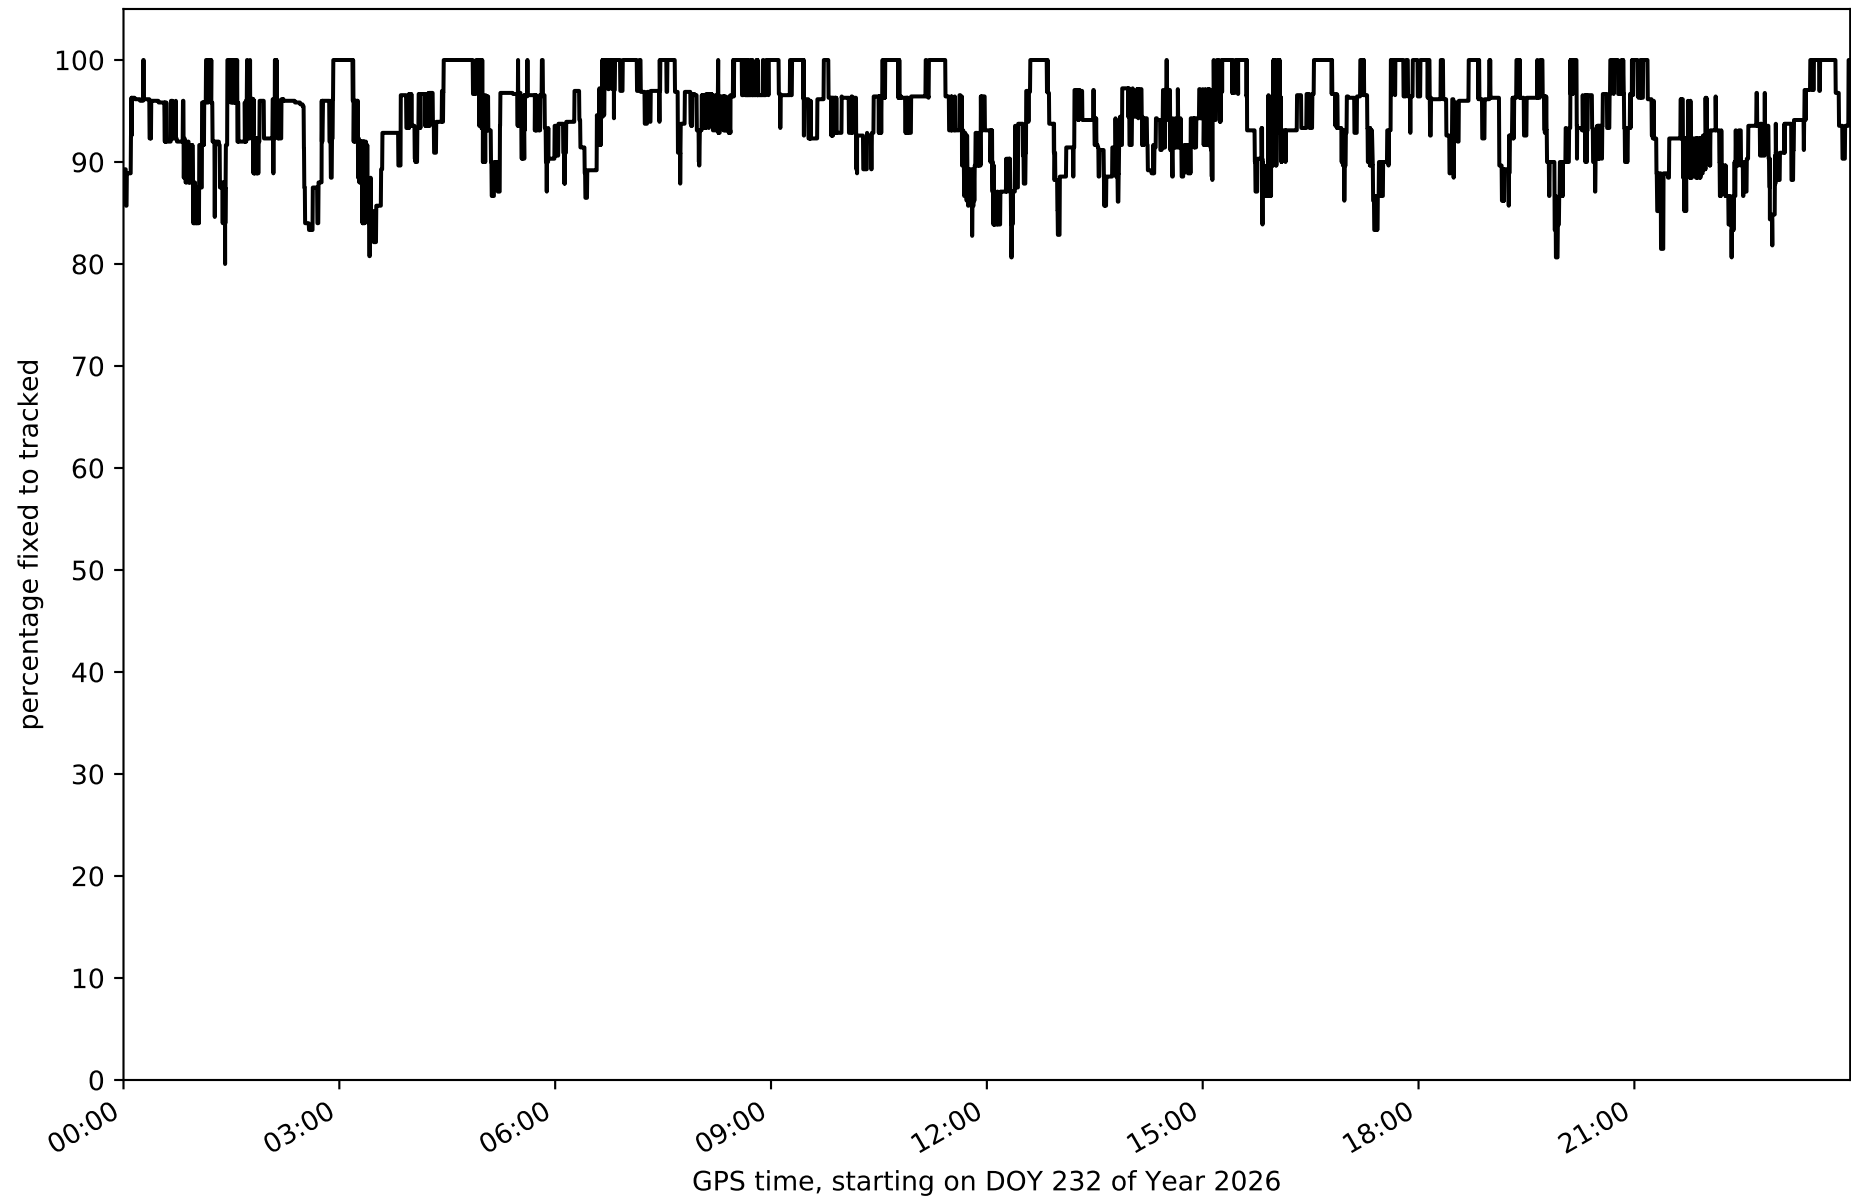


Network NT32 - only GPS with threshold set to 0.3

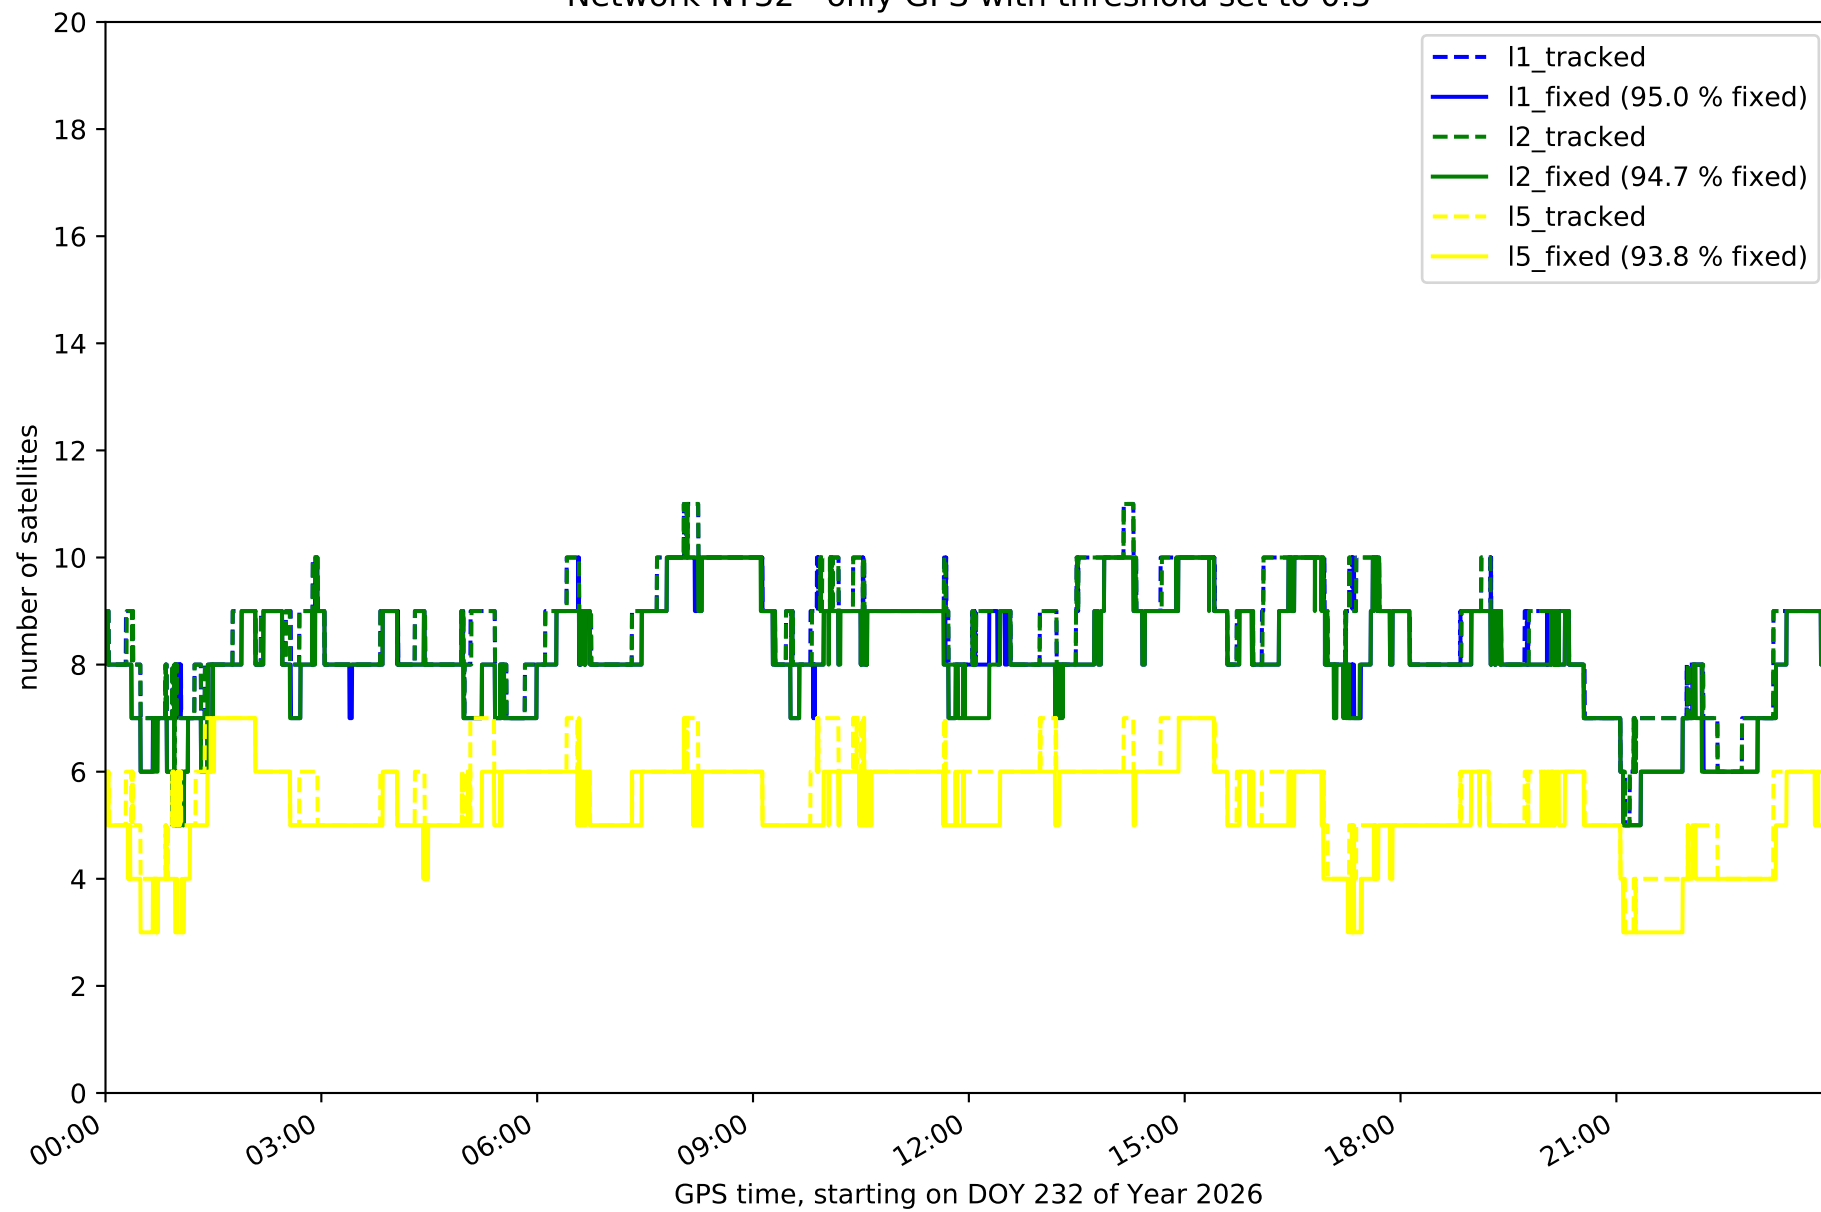


Network NT32 - only GLONASS with threshold set to 0.3

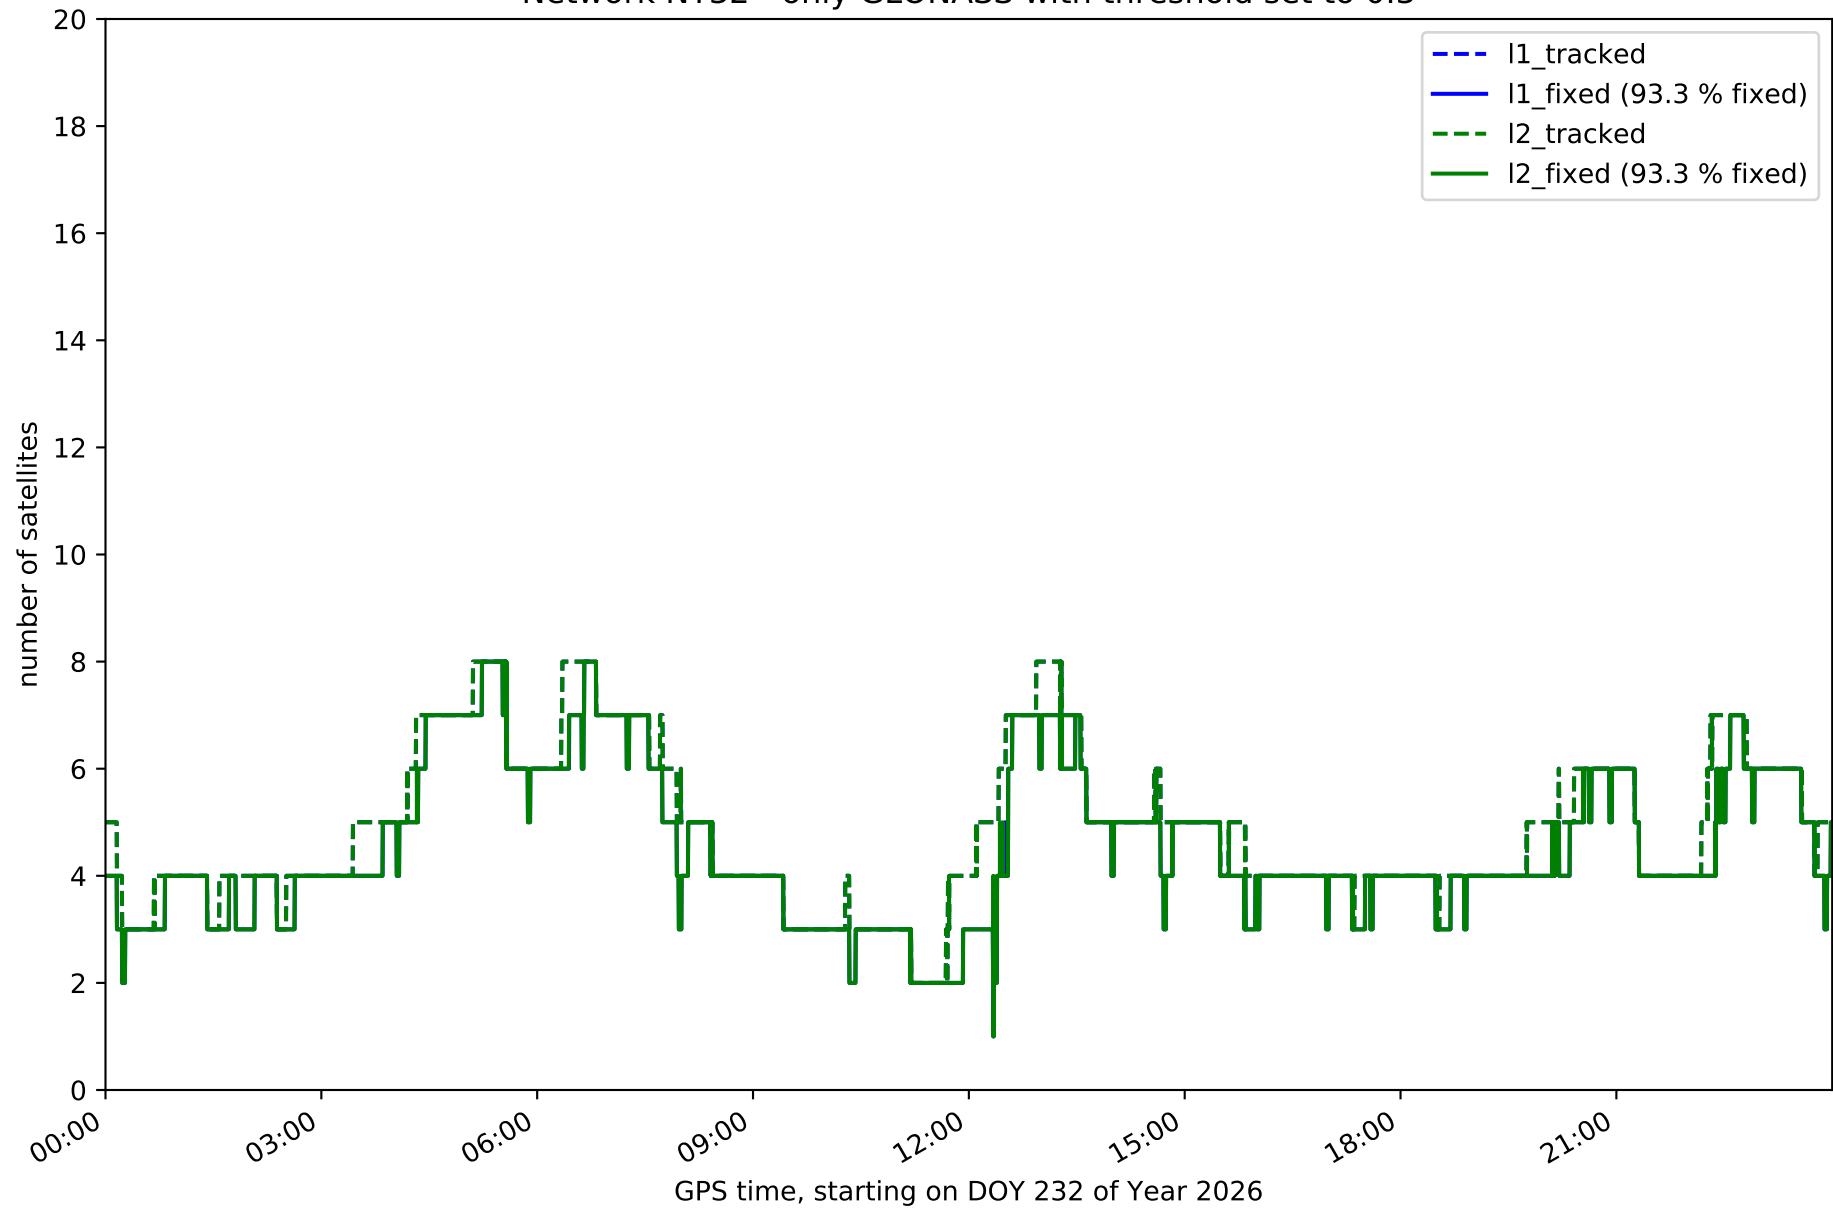


Network NT32 - only BDS with threshold set to 0.3

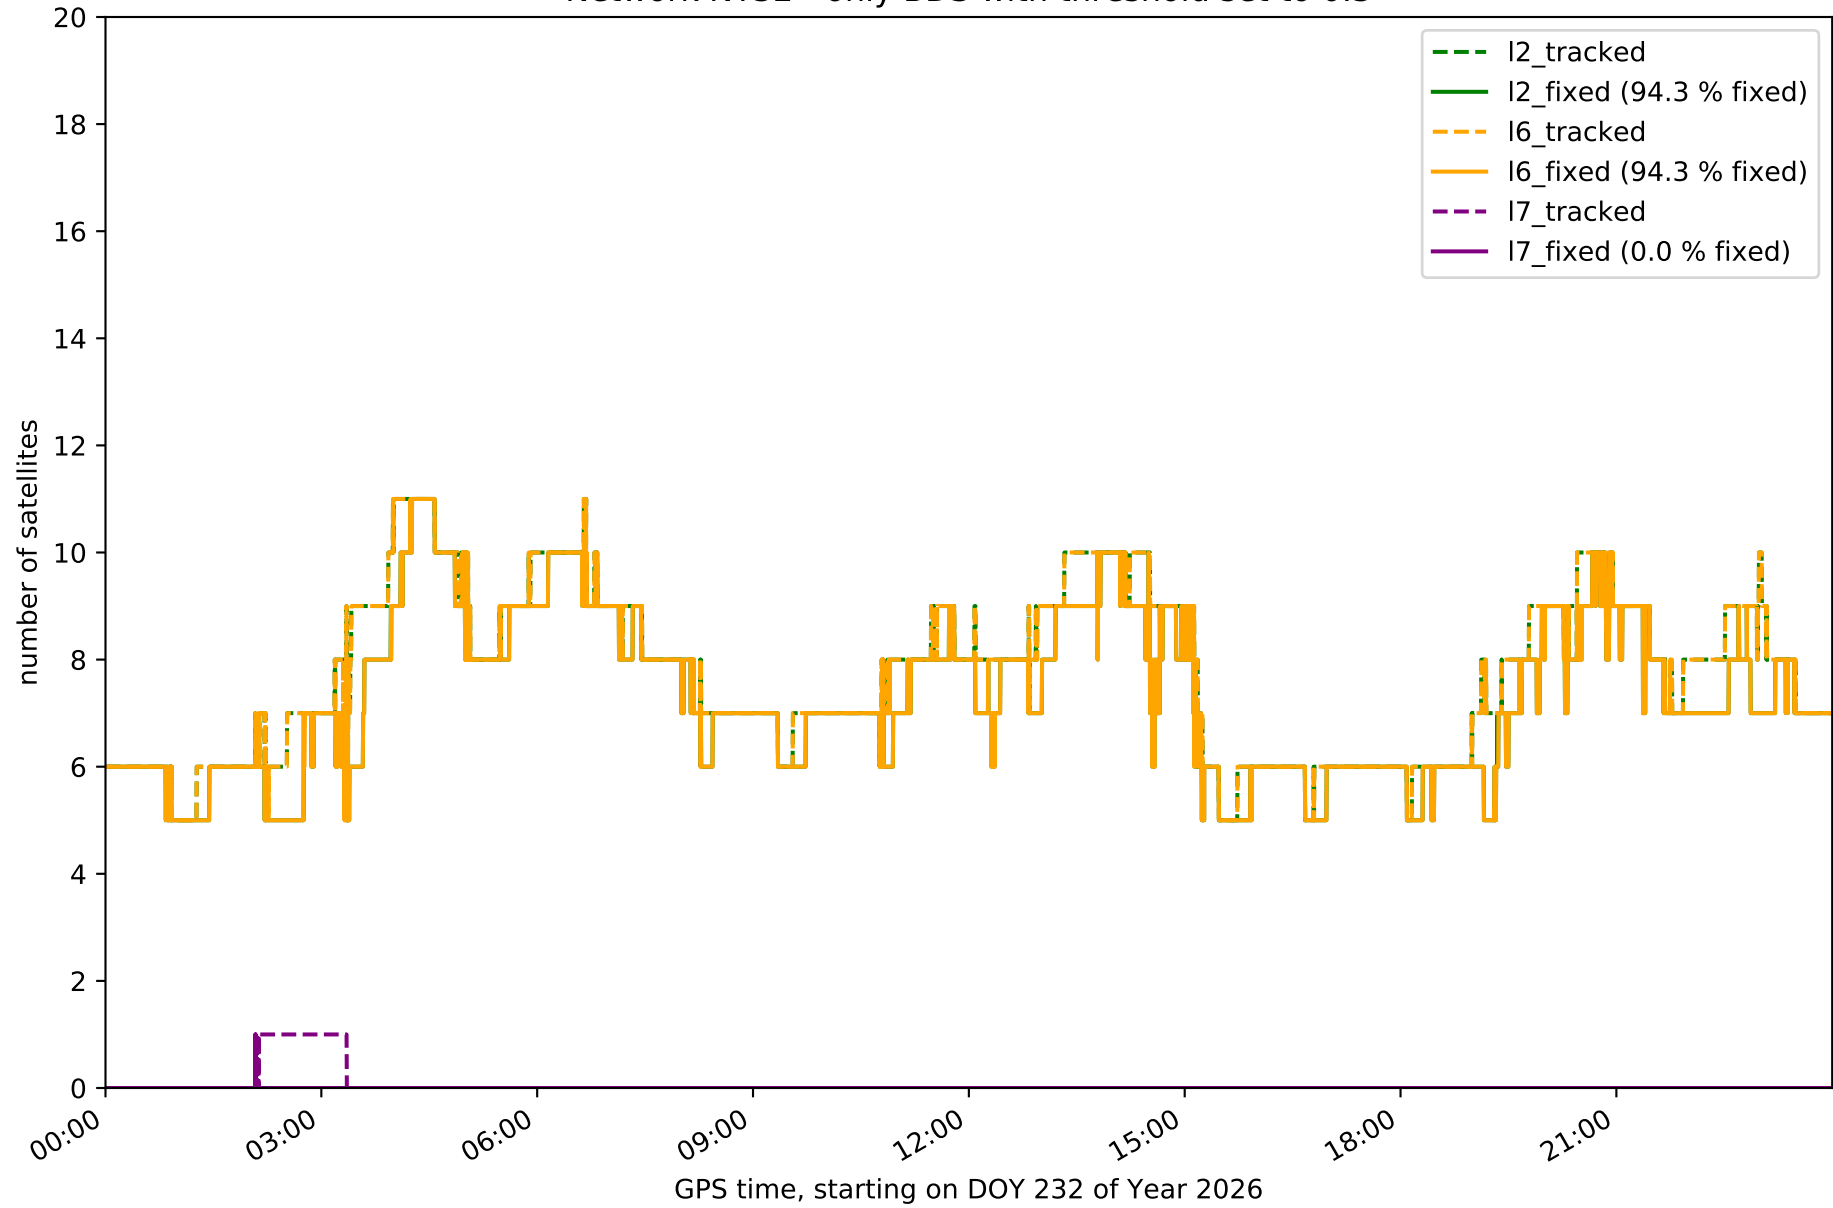


Network NT32 - only Galileo with threshold set to 0.3

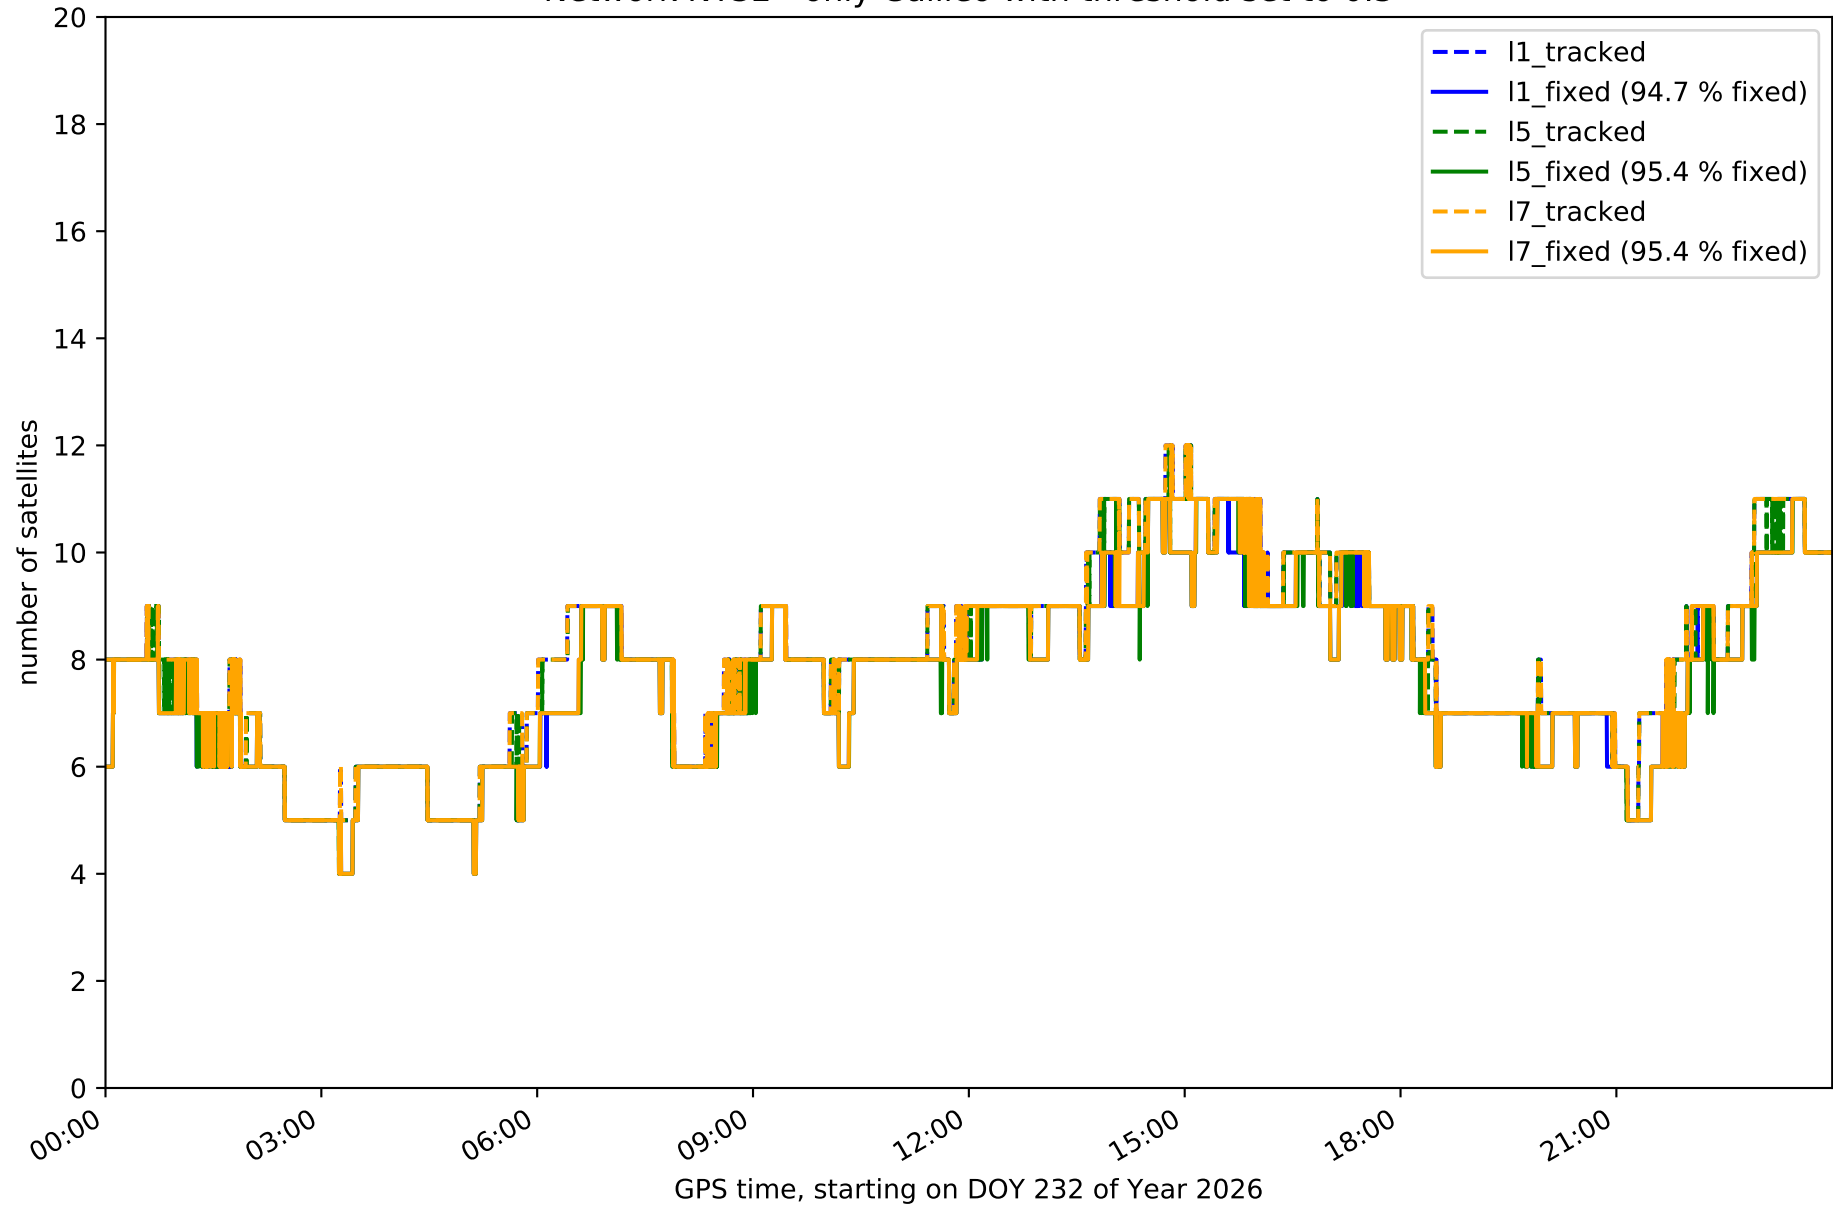


Station EH01 in network NT32

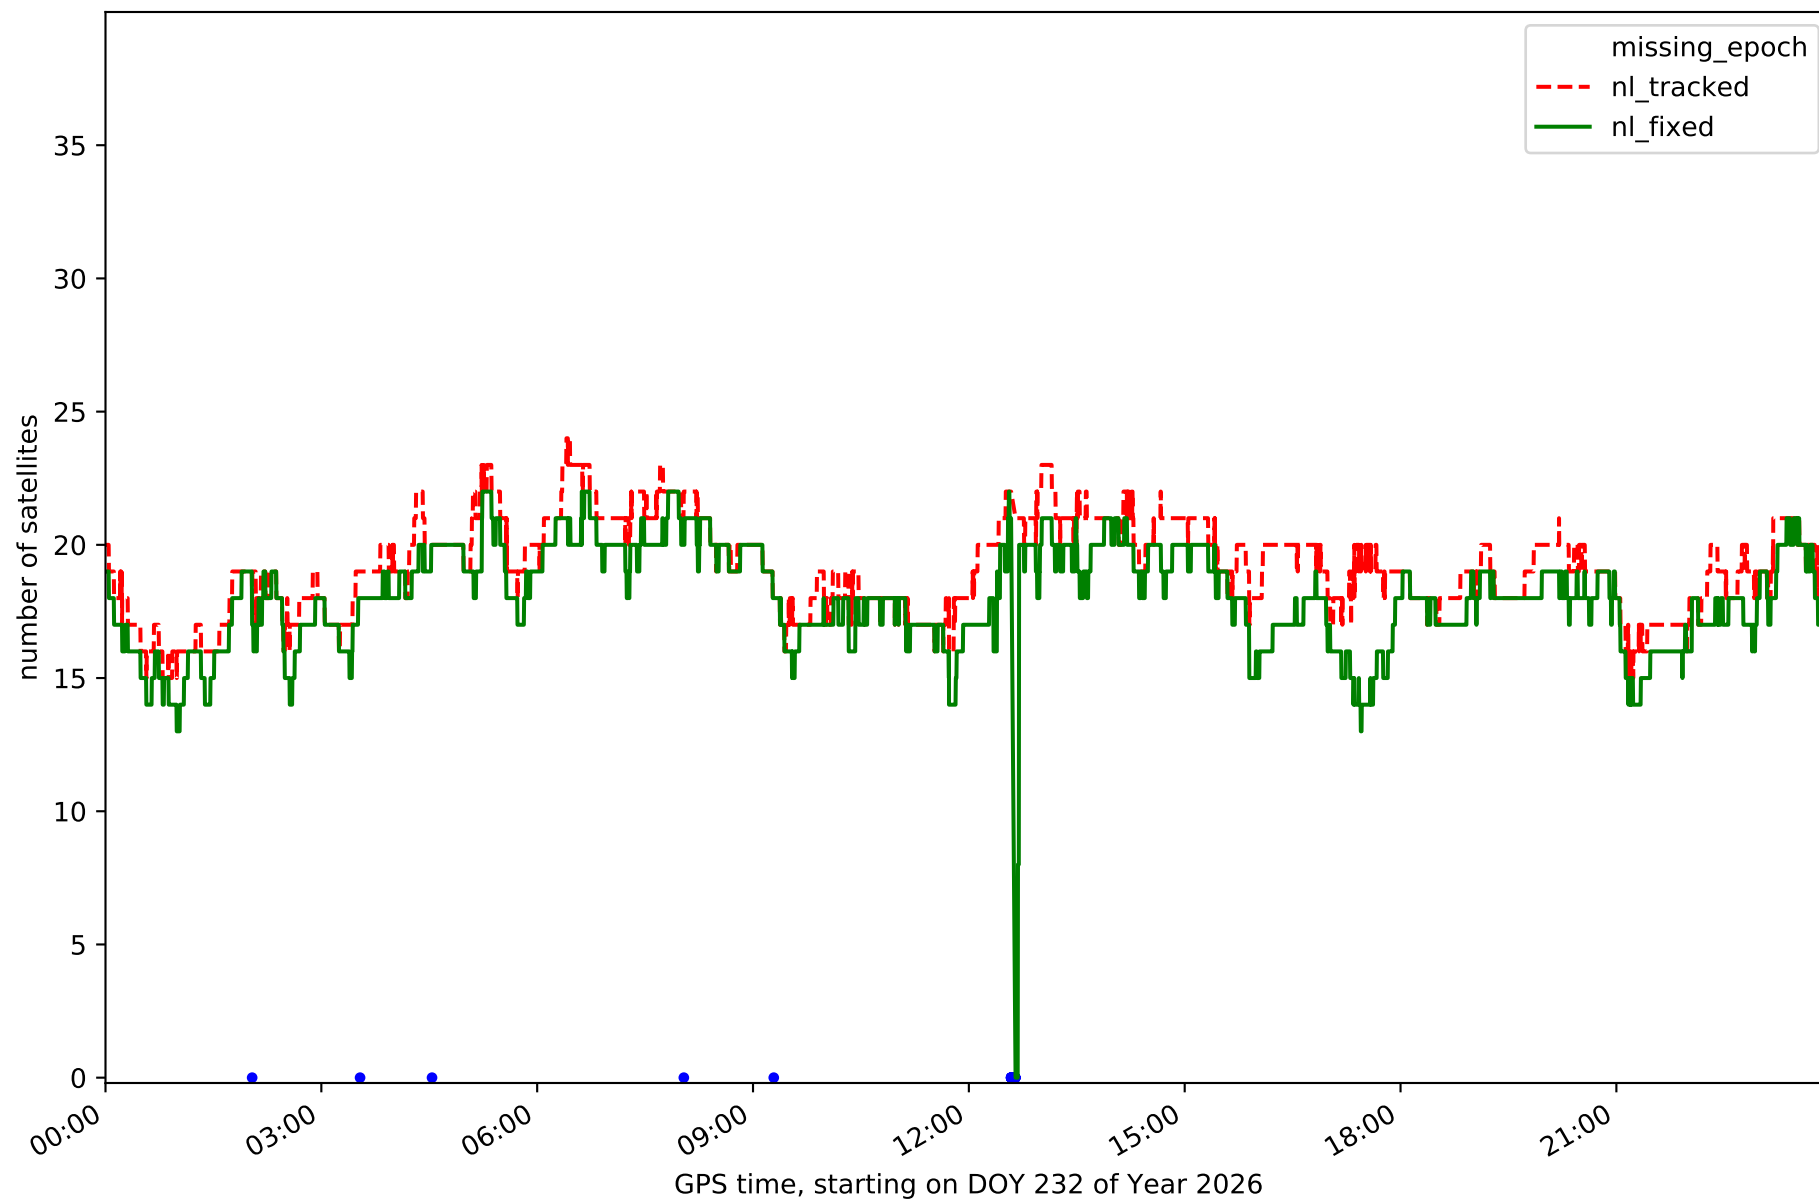


Station EH02 in network NT32

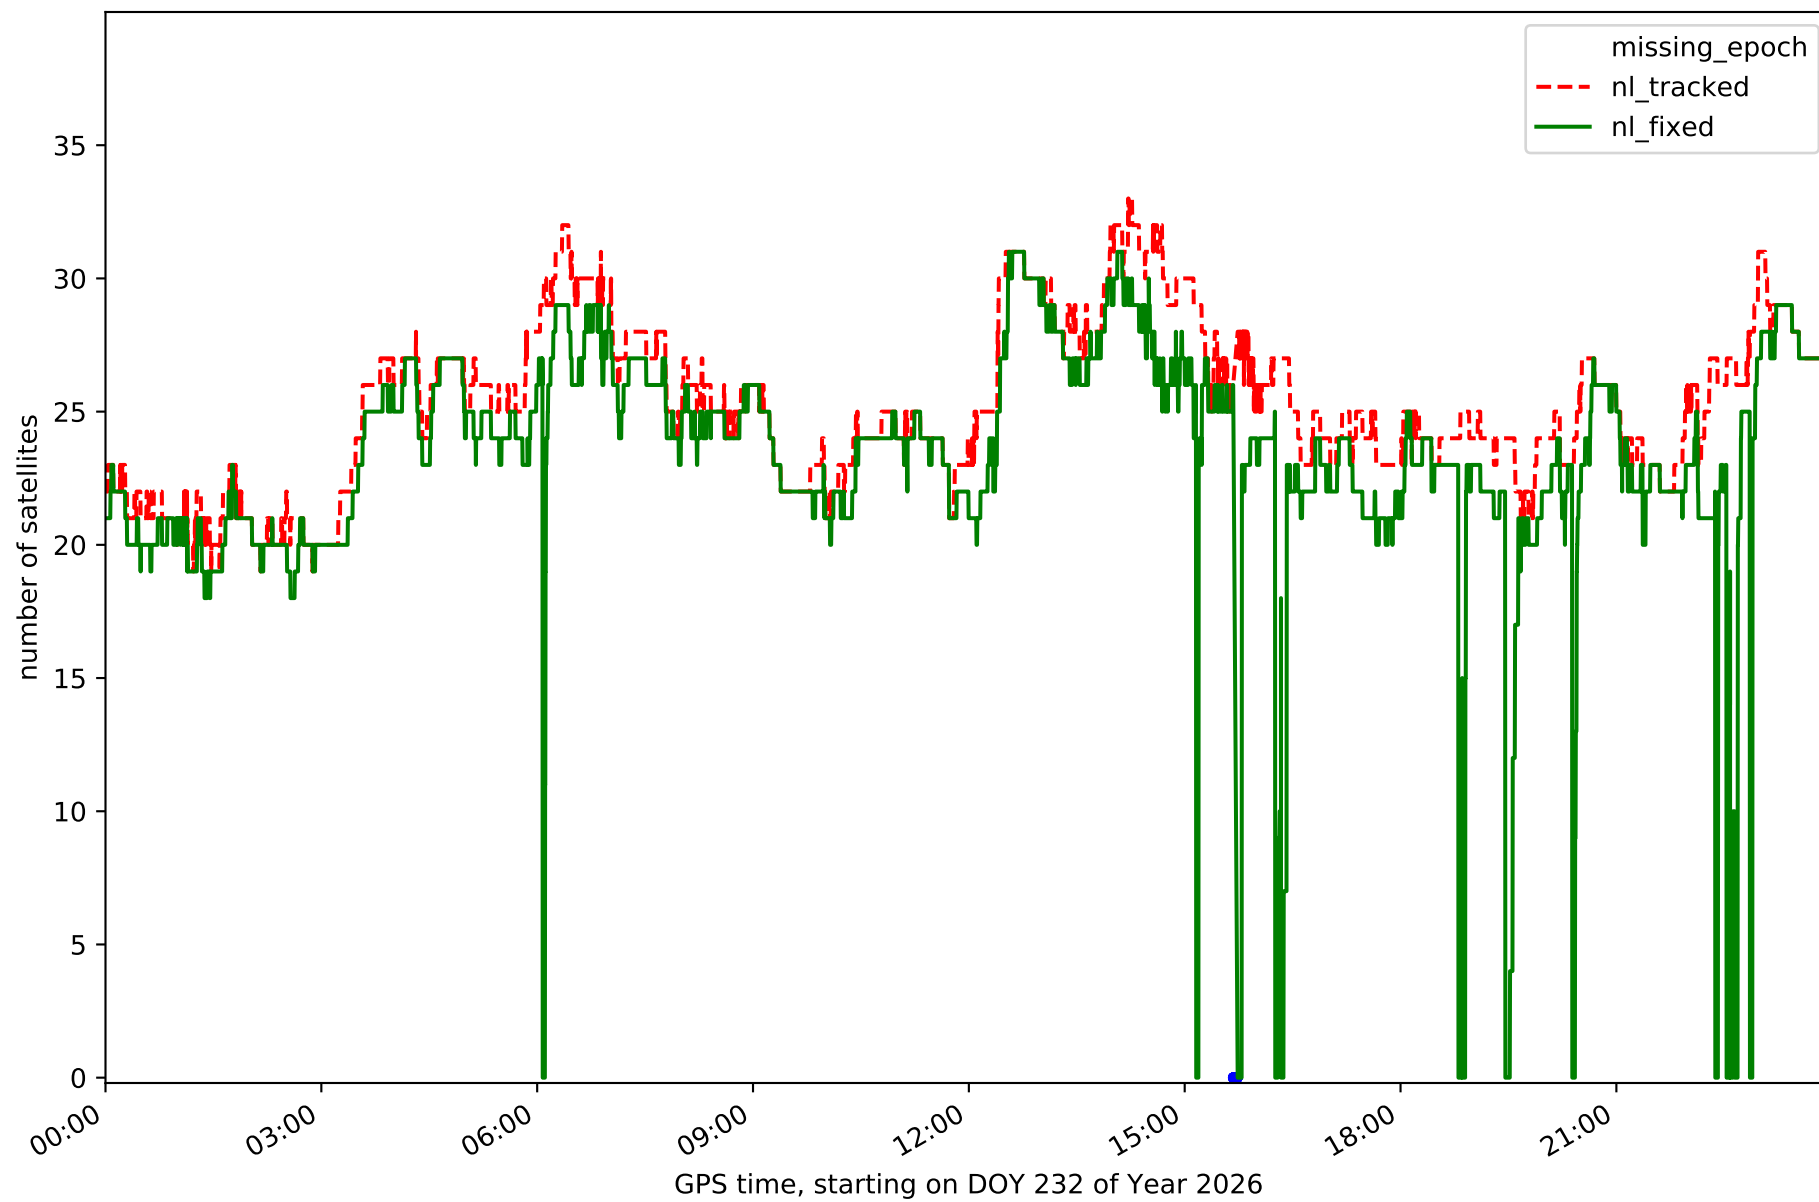


Station GOM1 in network NT32

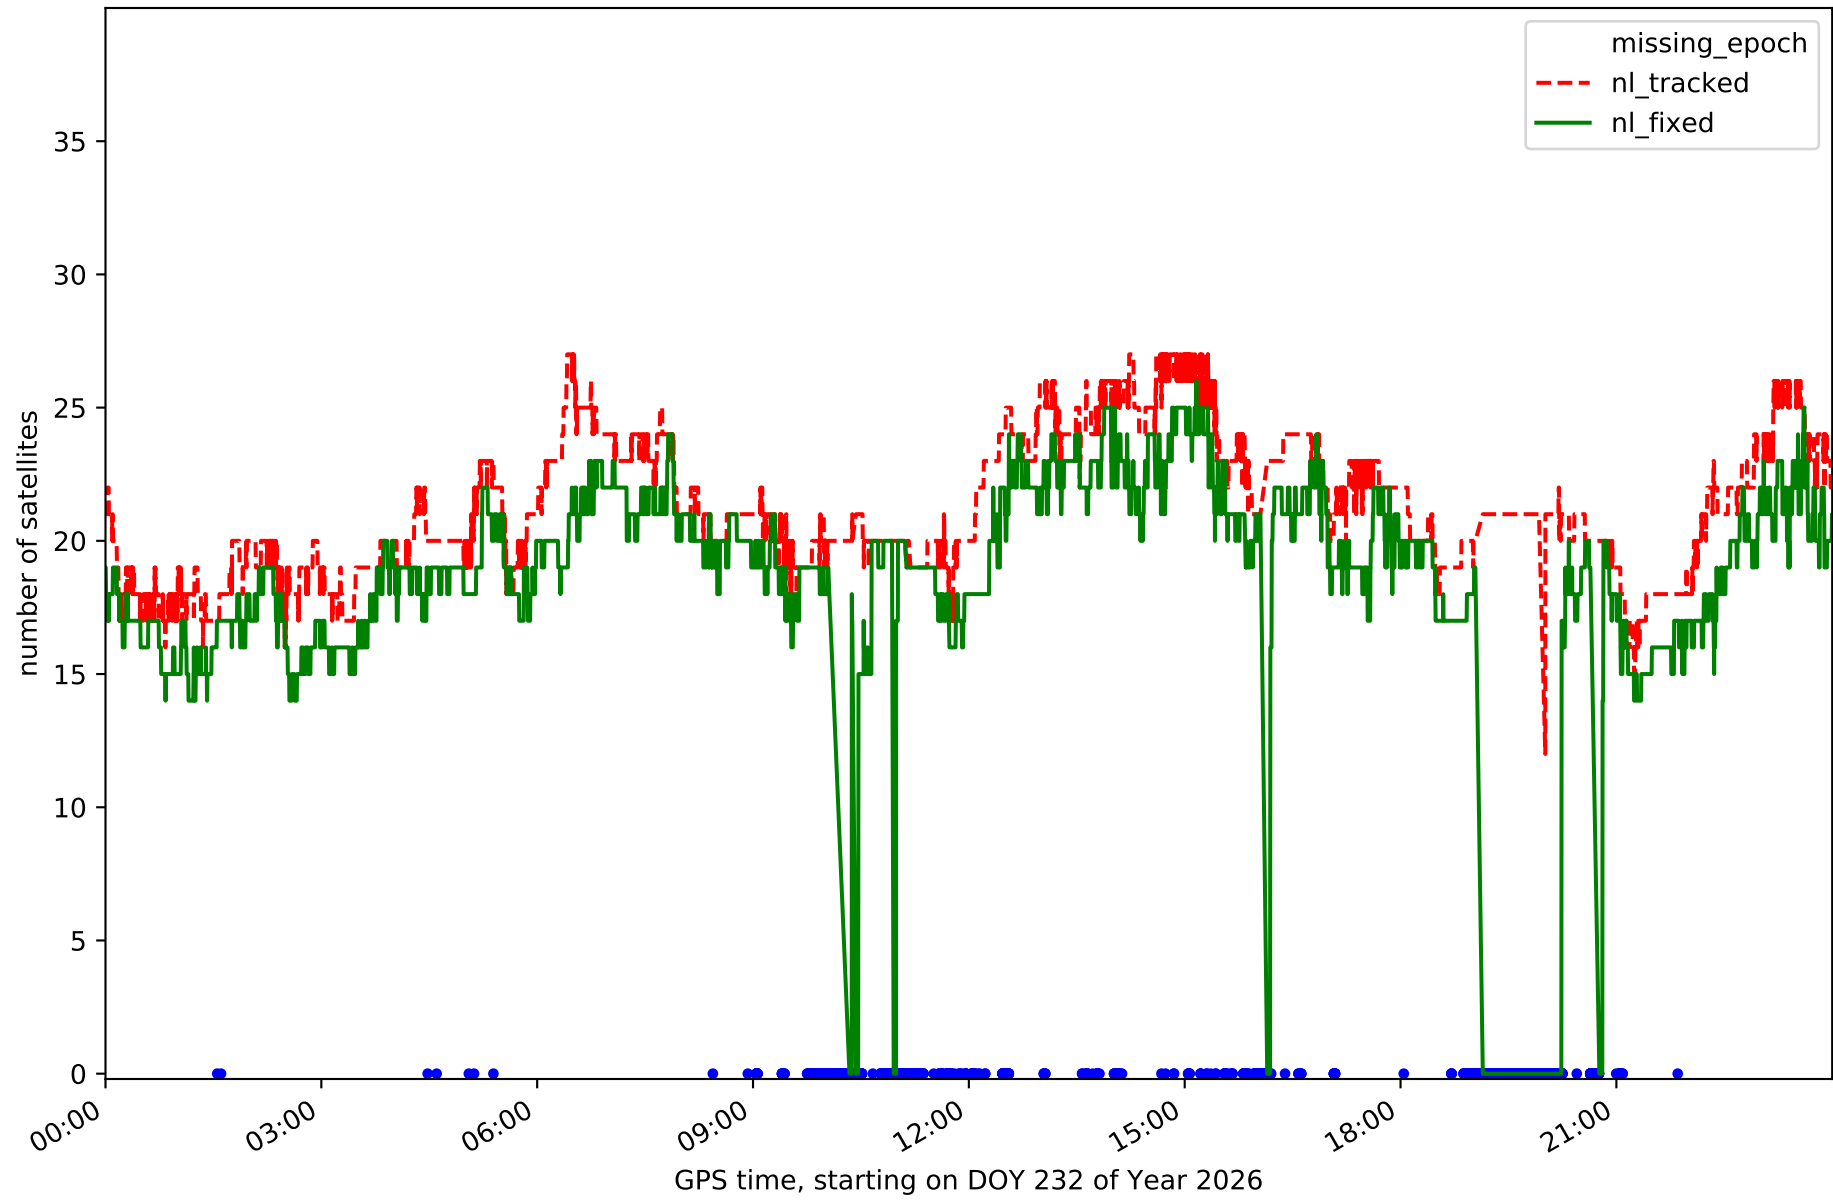


Station GOME in network NT32

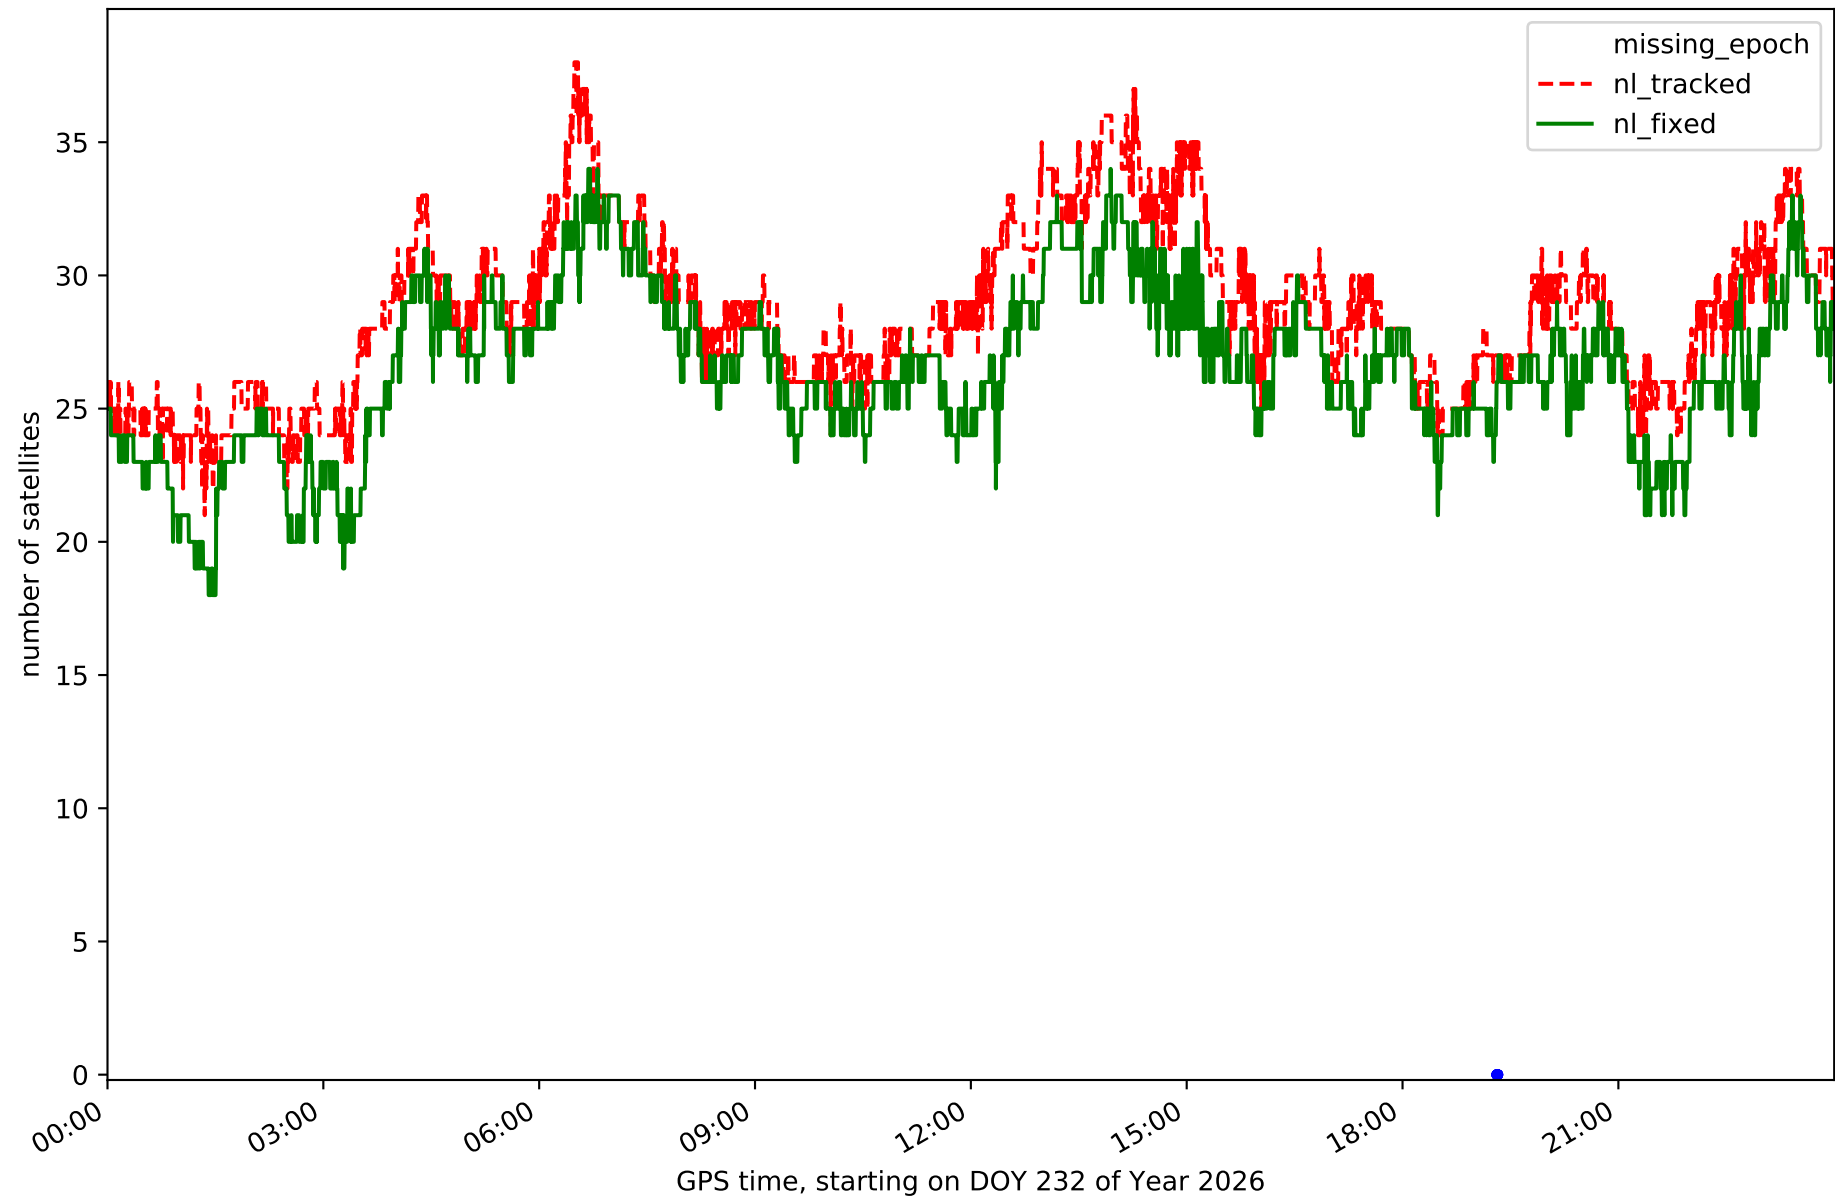


Station IZAN in network NT32

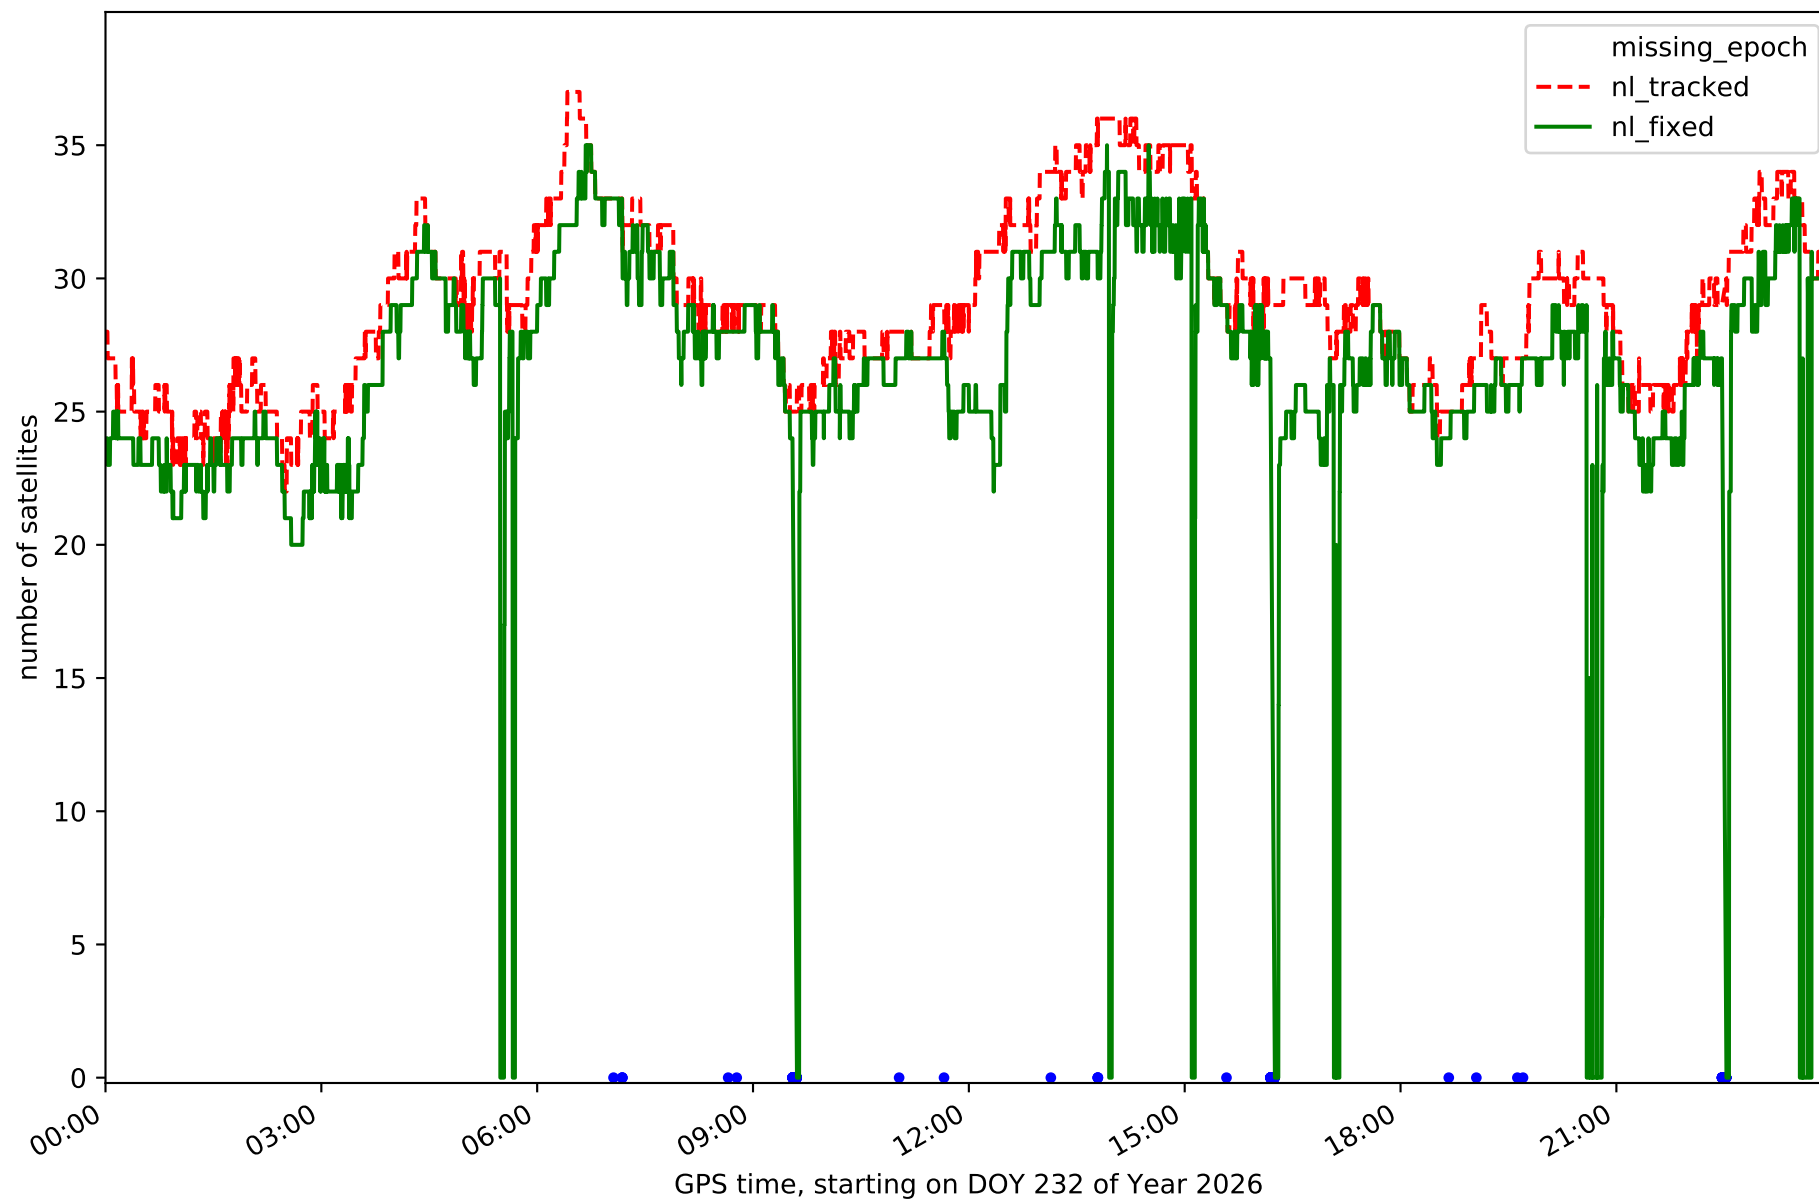


Station LP01 in network NT32

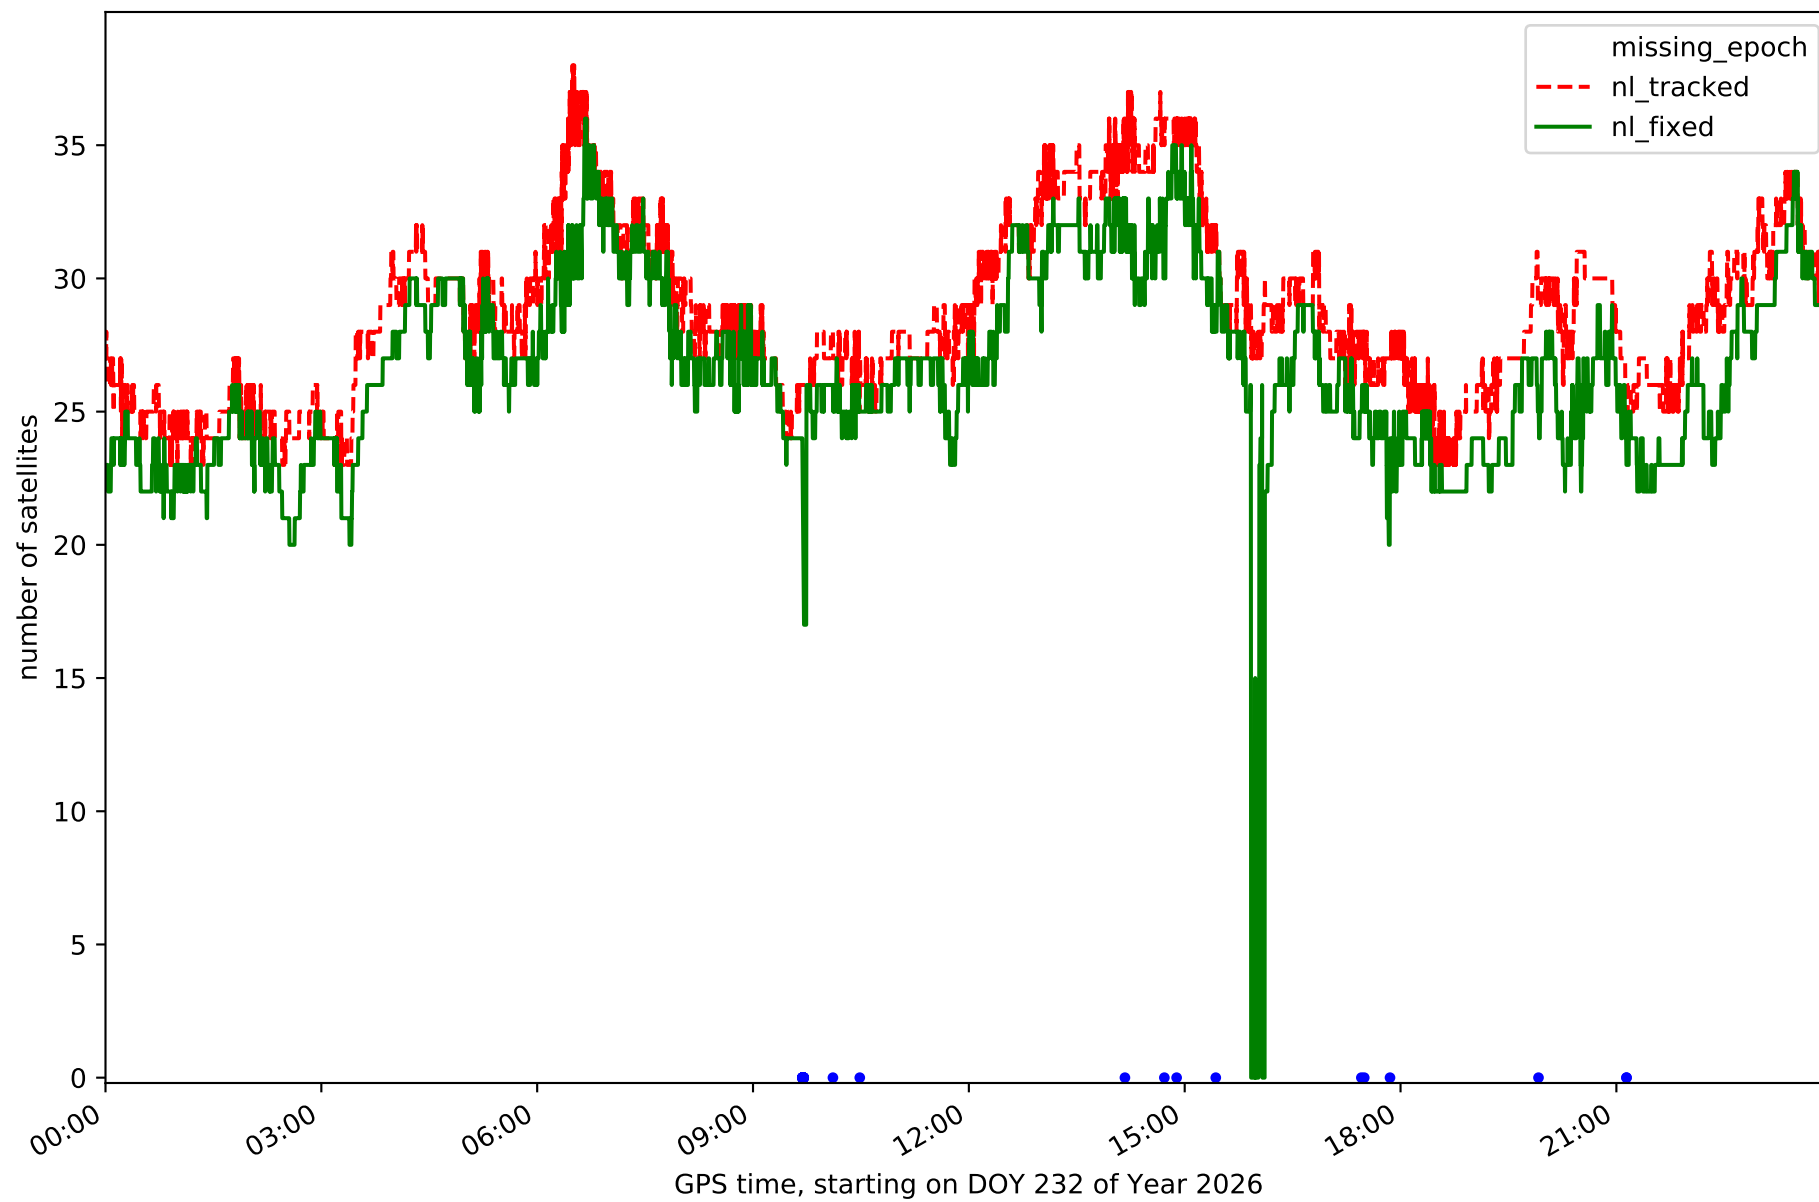


Station LP03 in network NT32

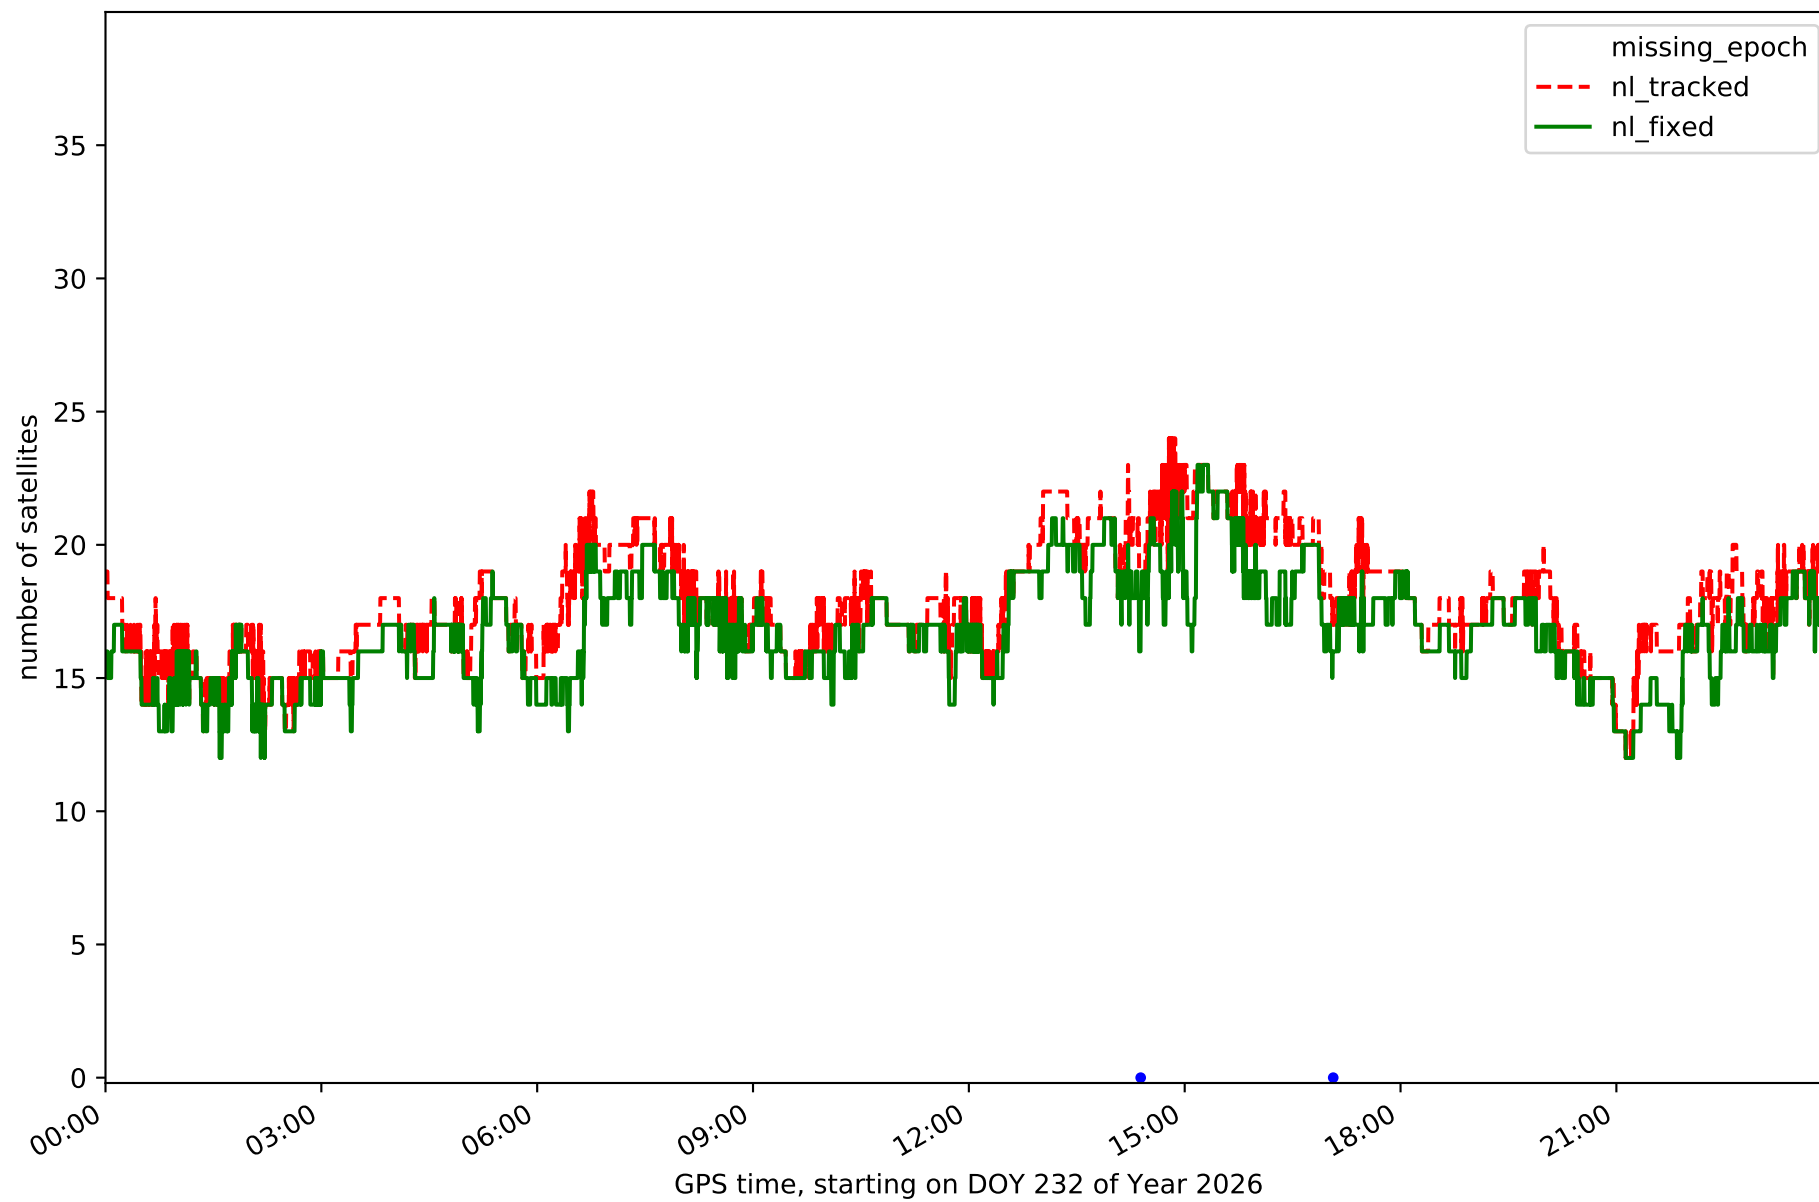


Station LPAL in network NT32

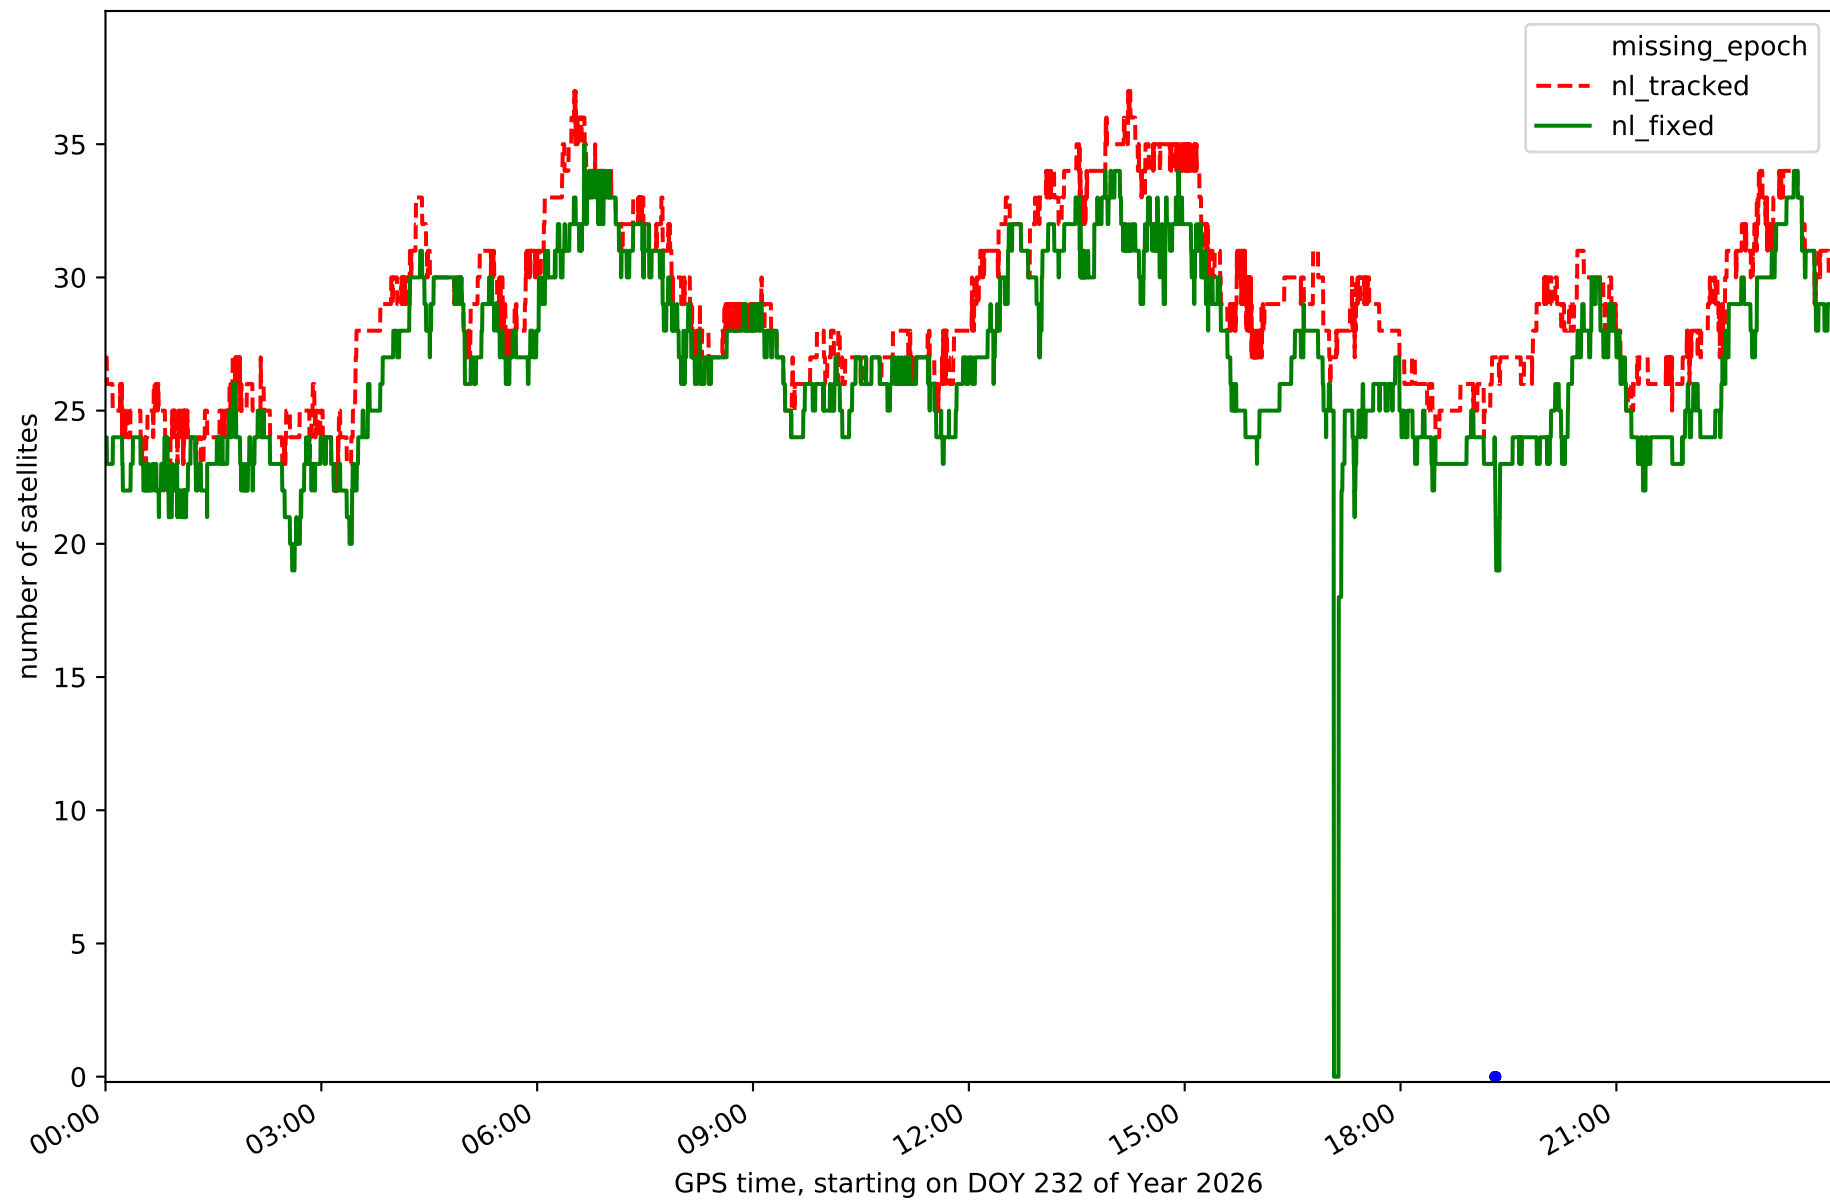


Station LRES in network NT32

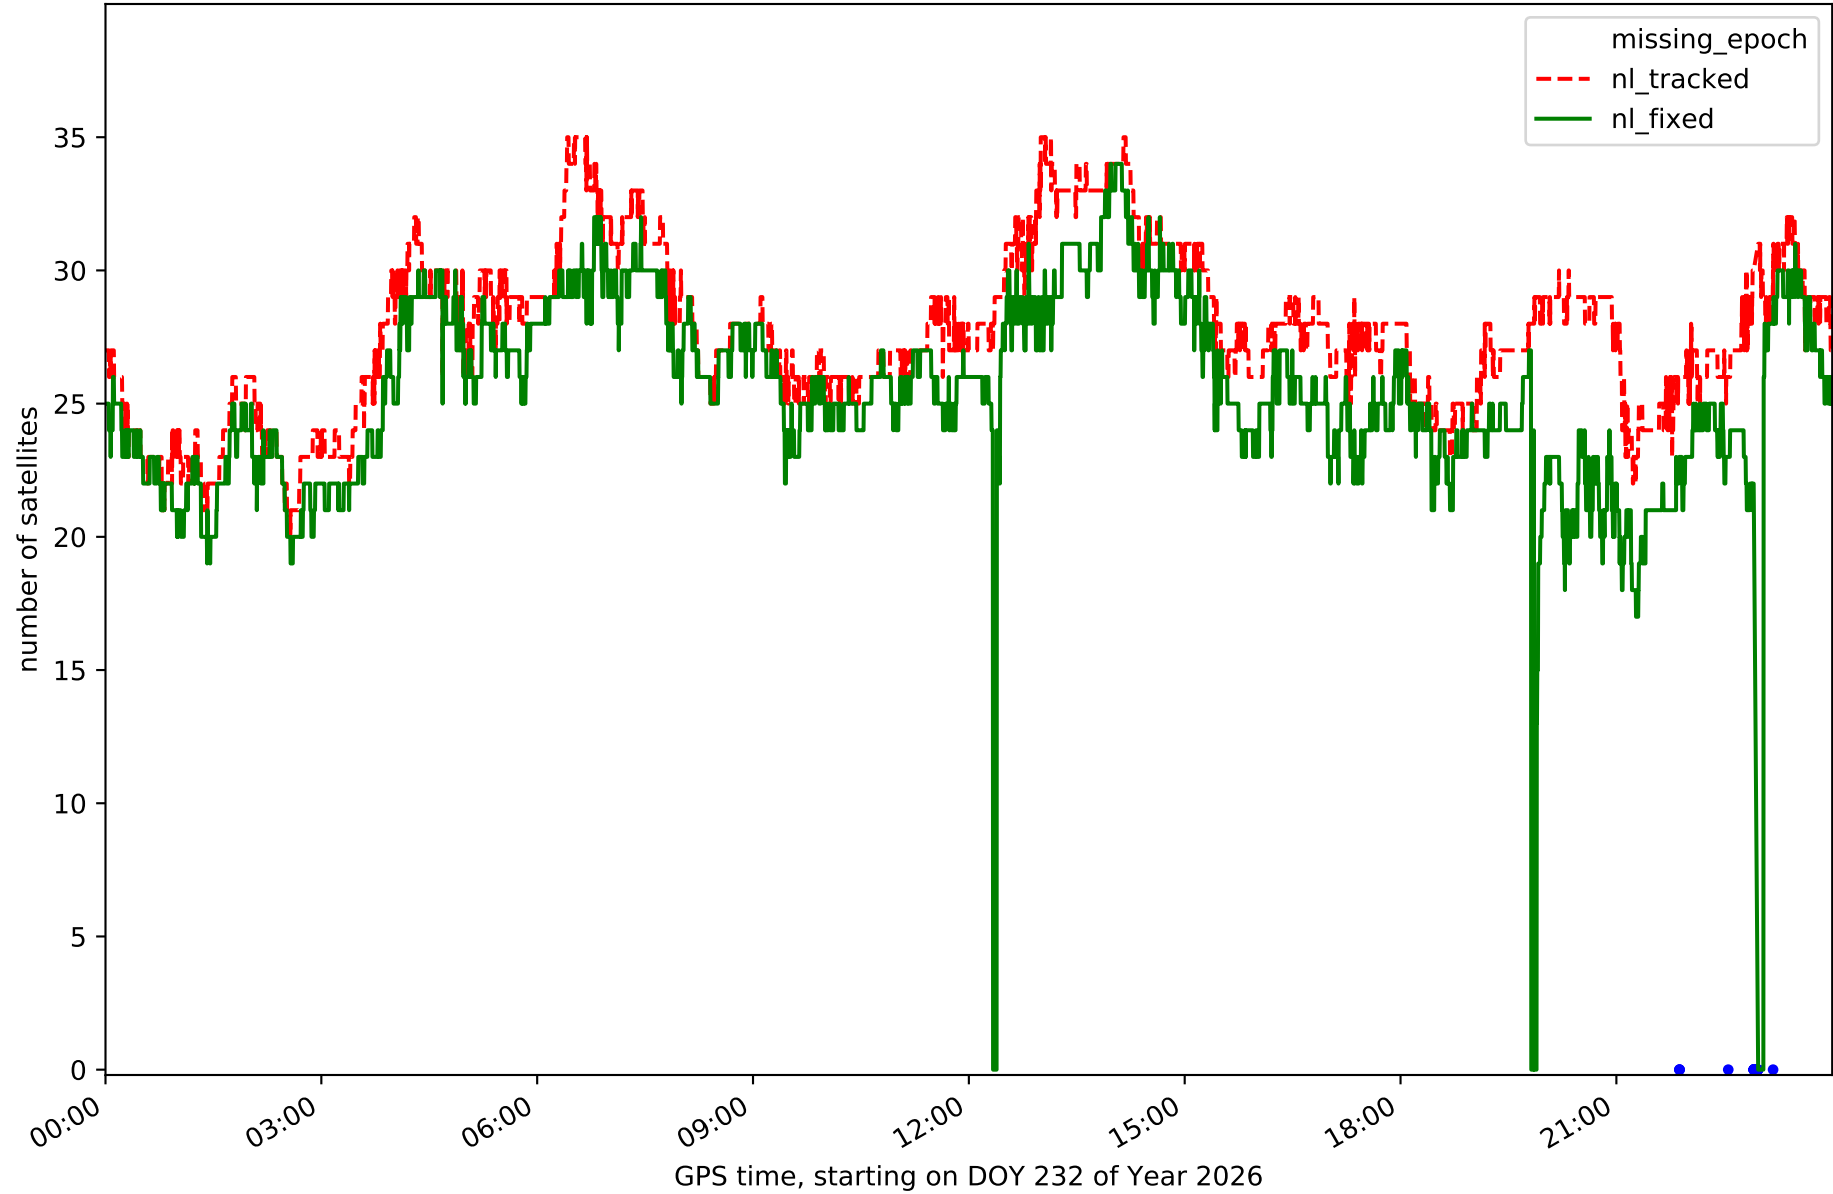


Station TN01 in network NT32

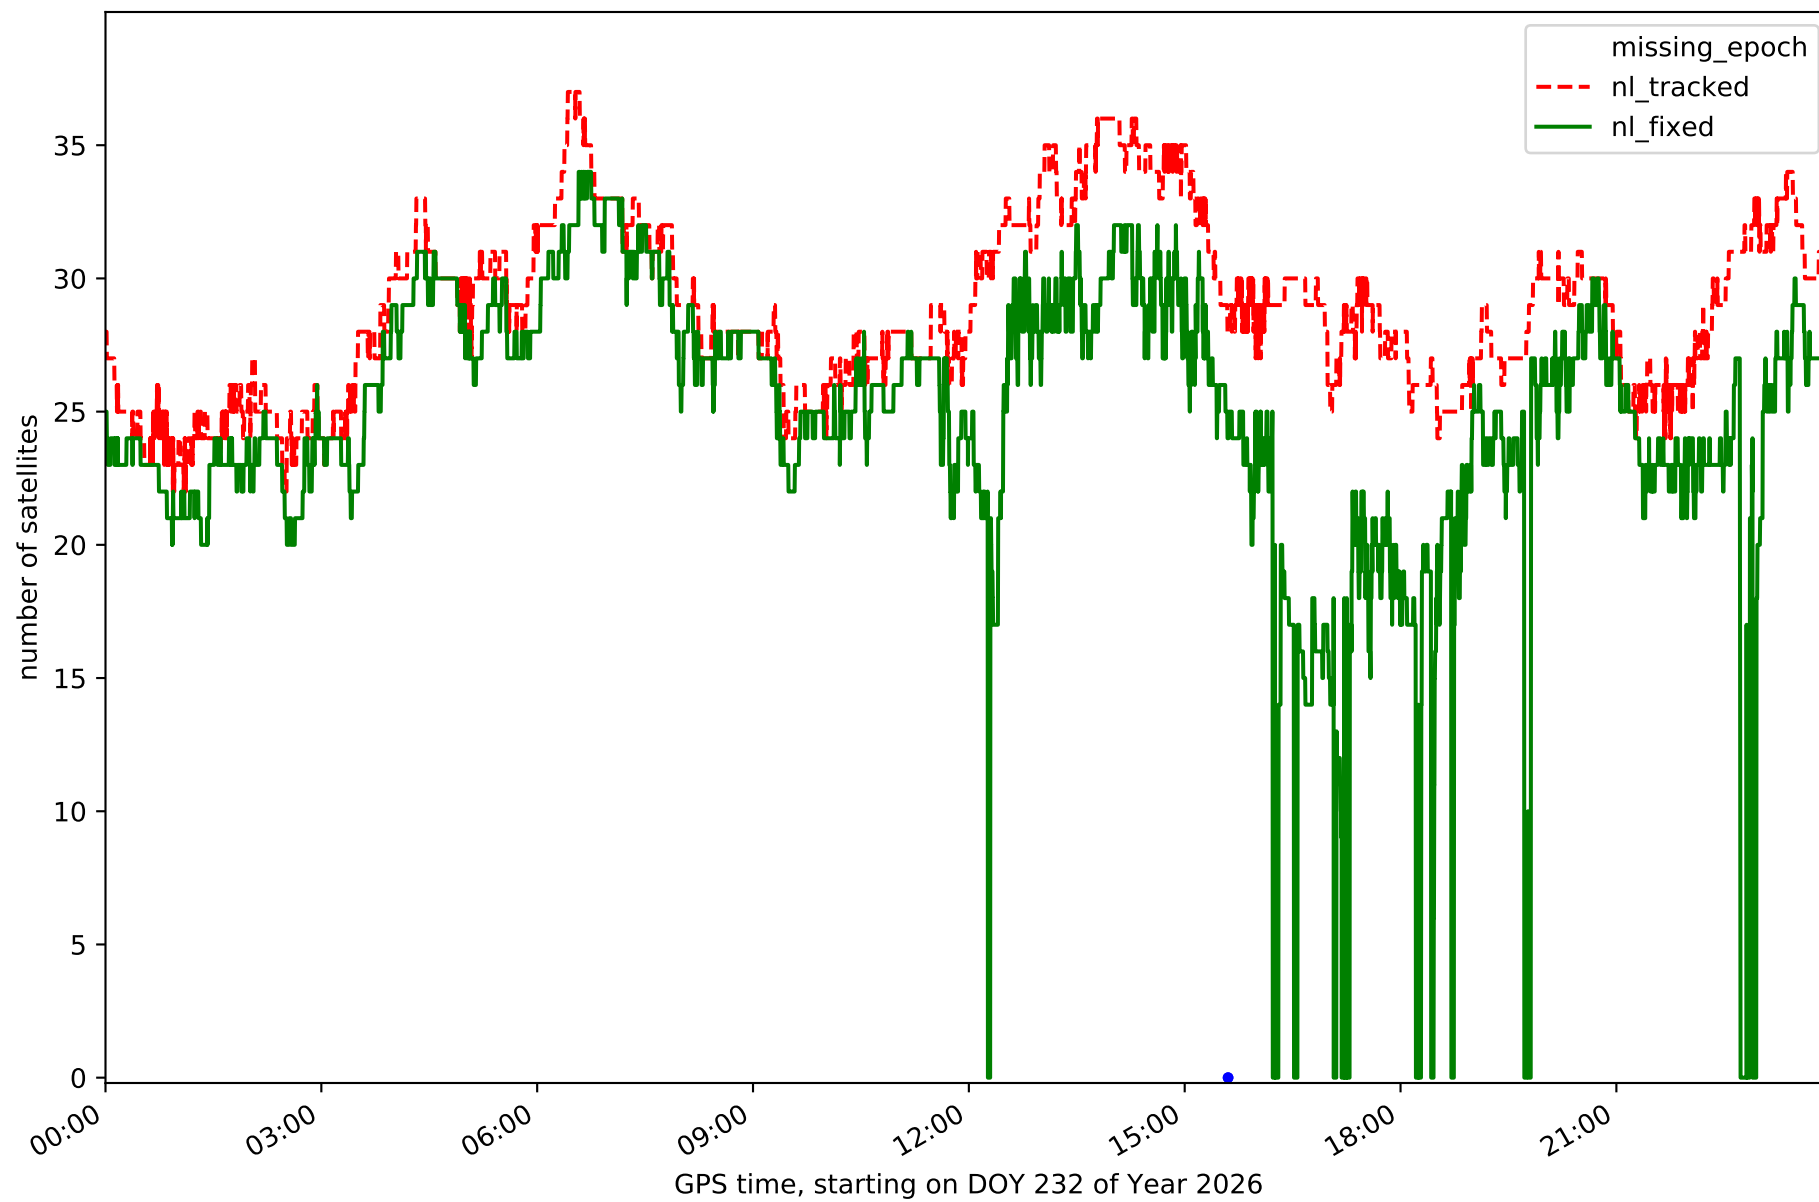


Station TN02 in network NT32

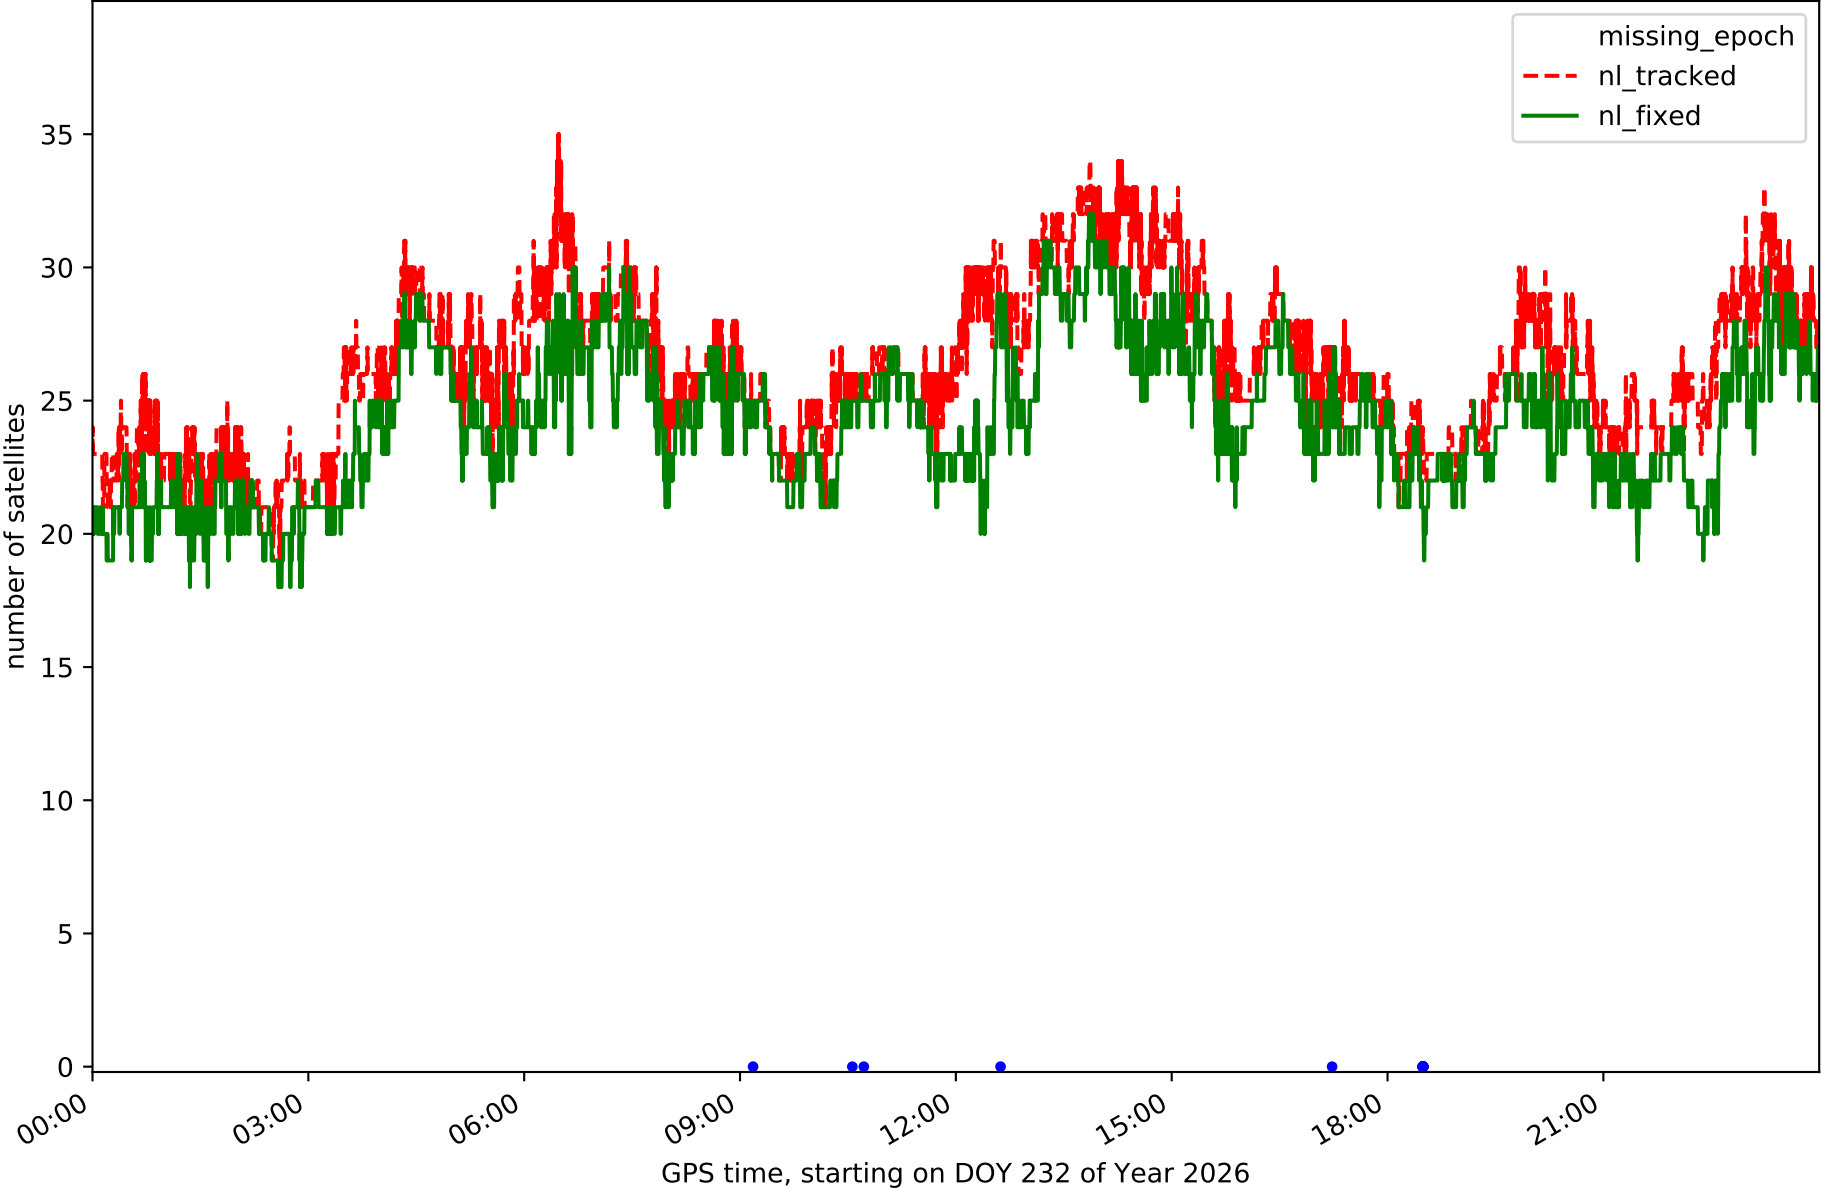


Station TN03 in network NT32

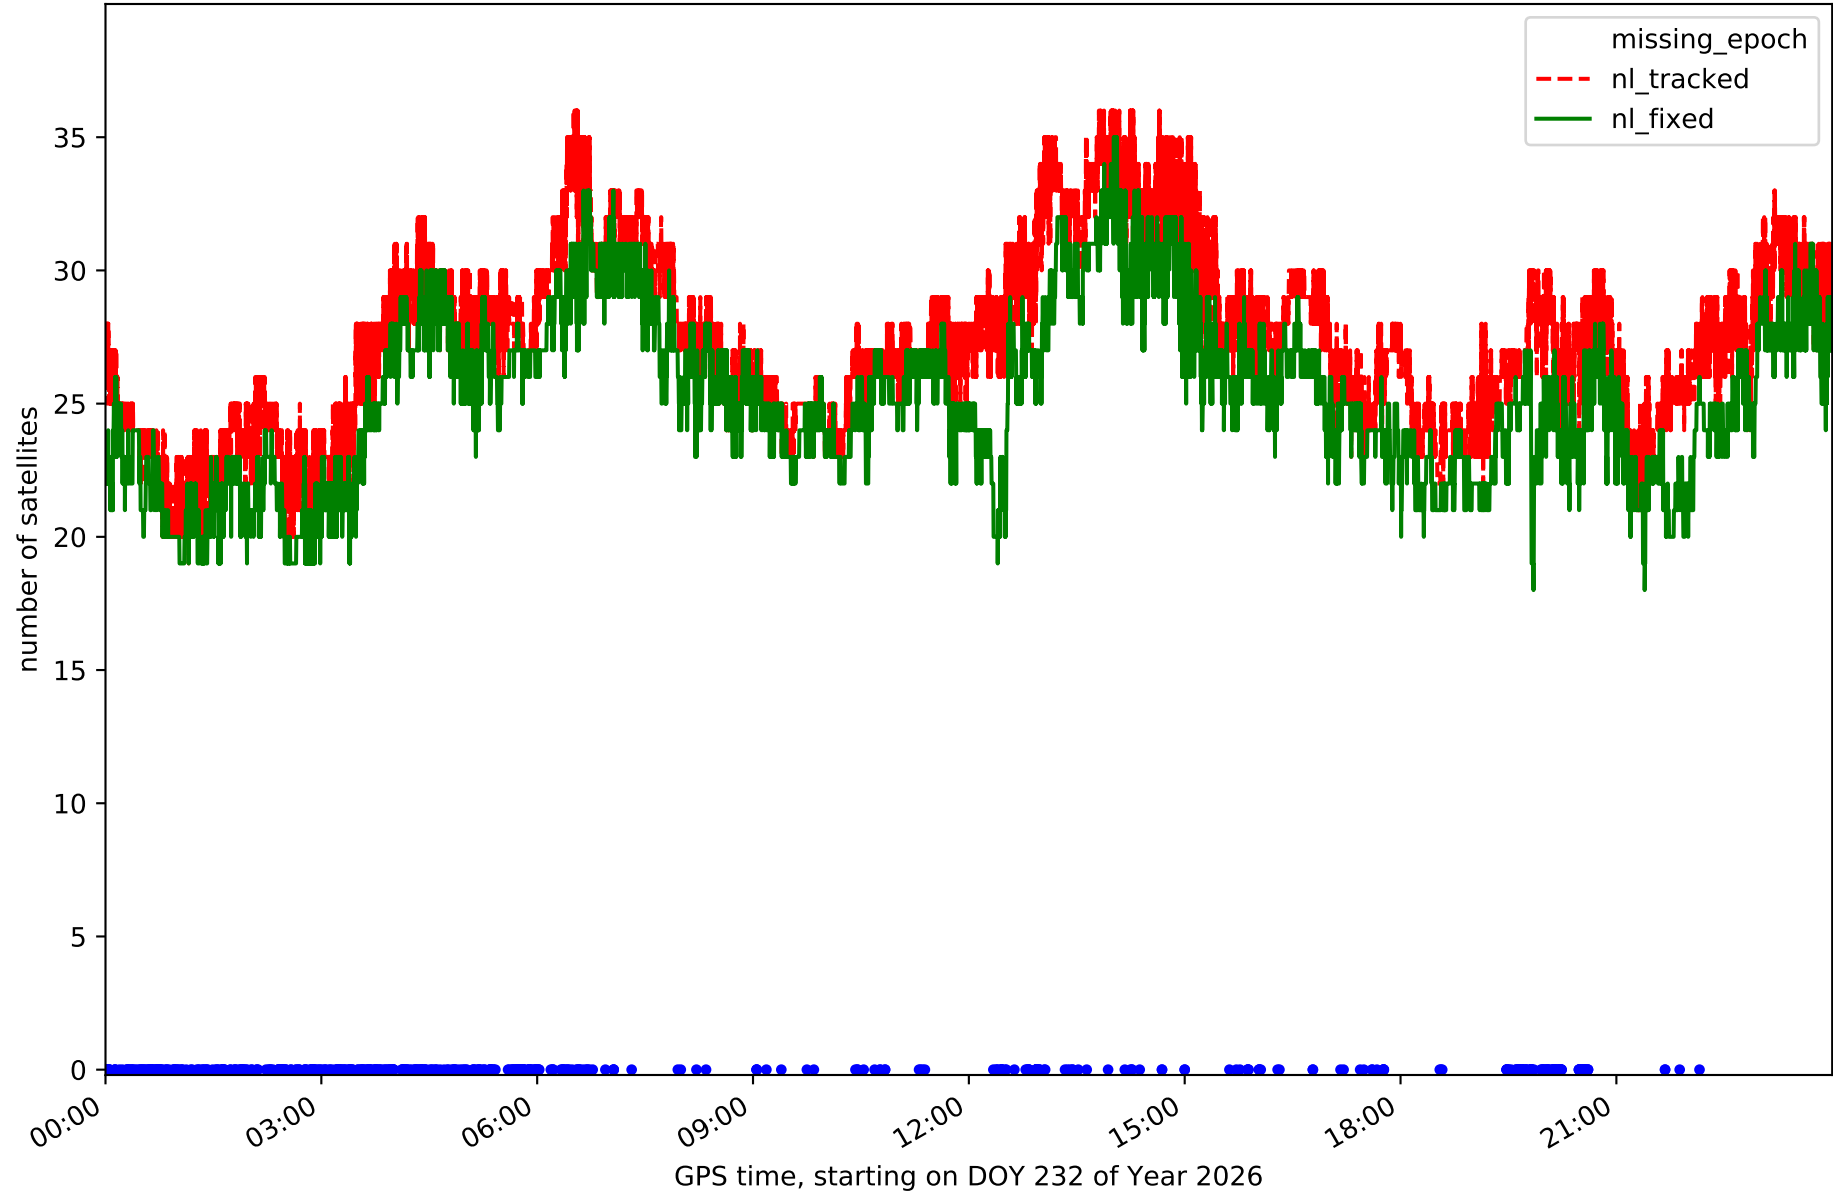


Station TN06 in network NT32

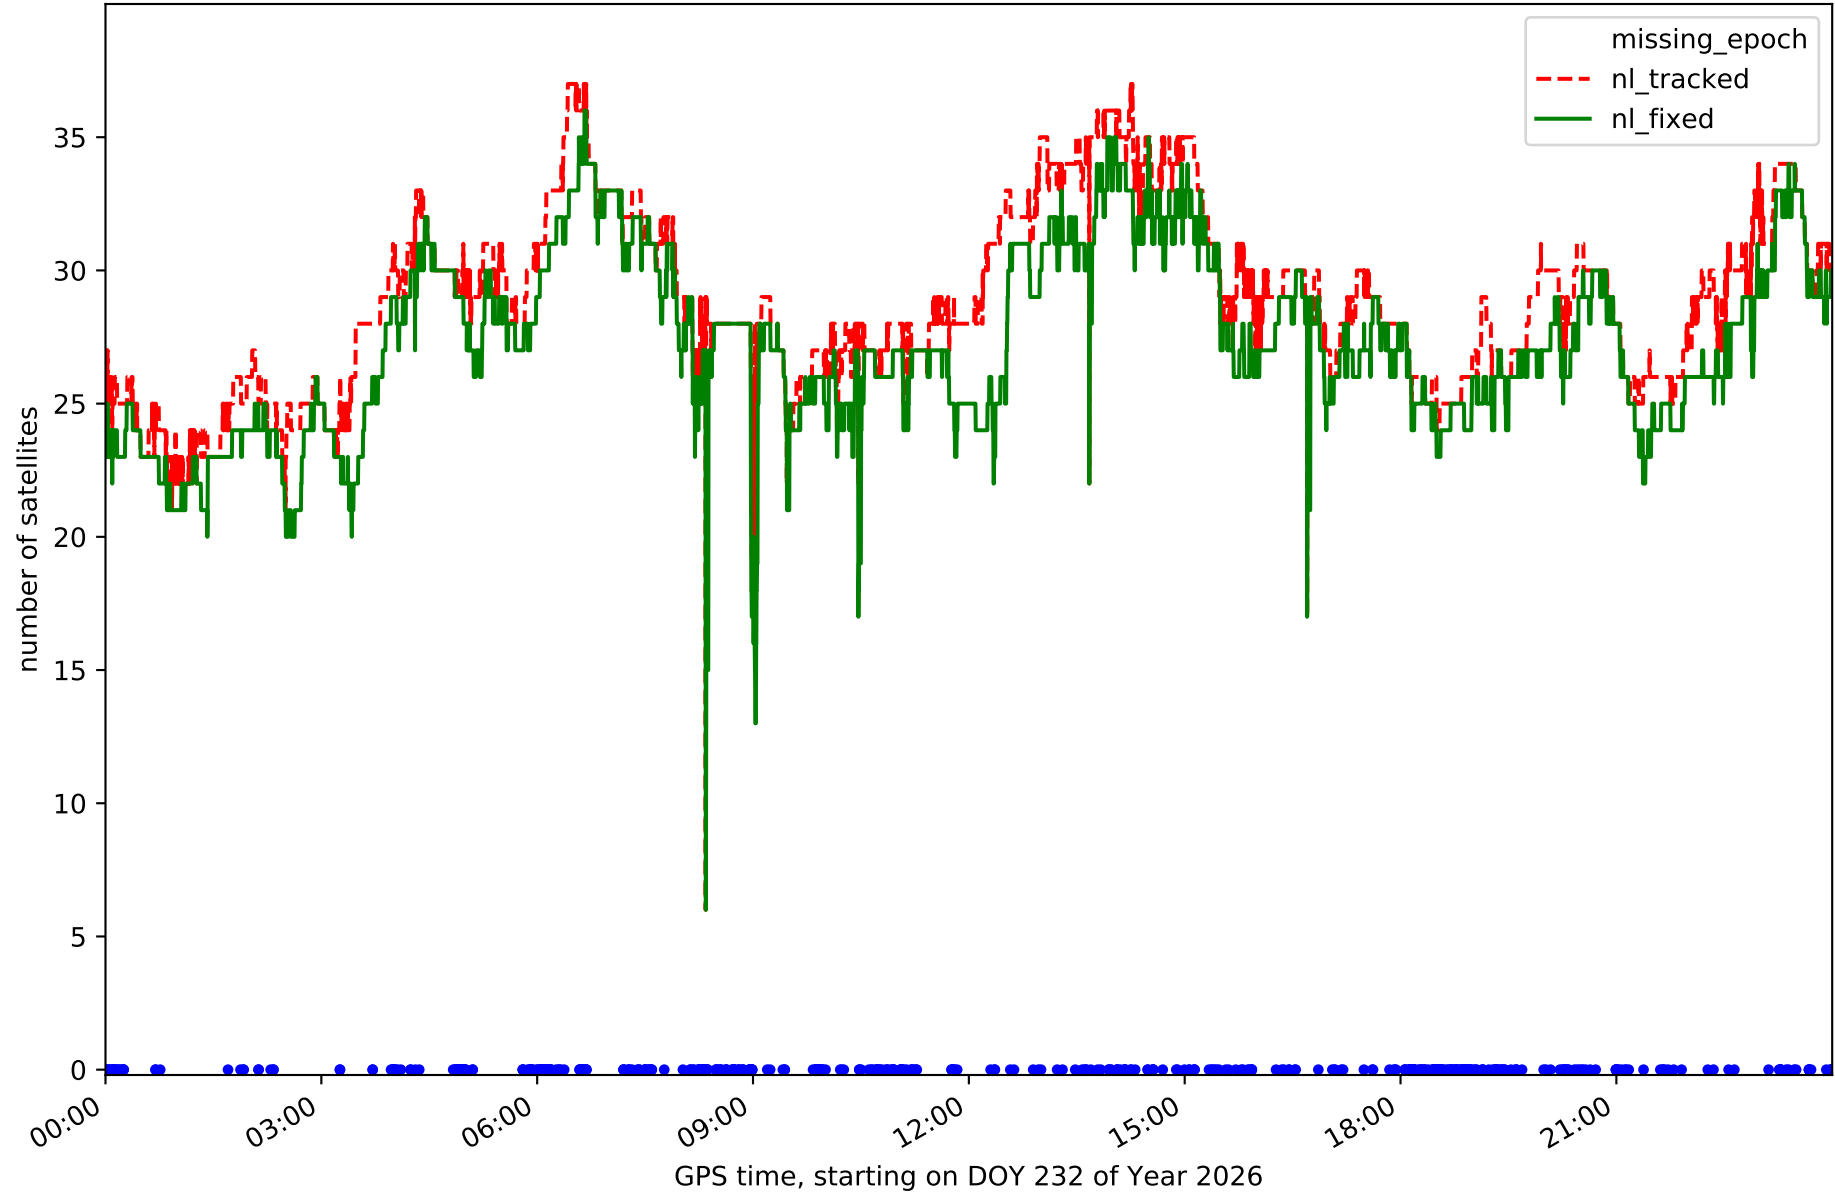


Station TN09 in network NT32

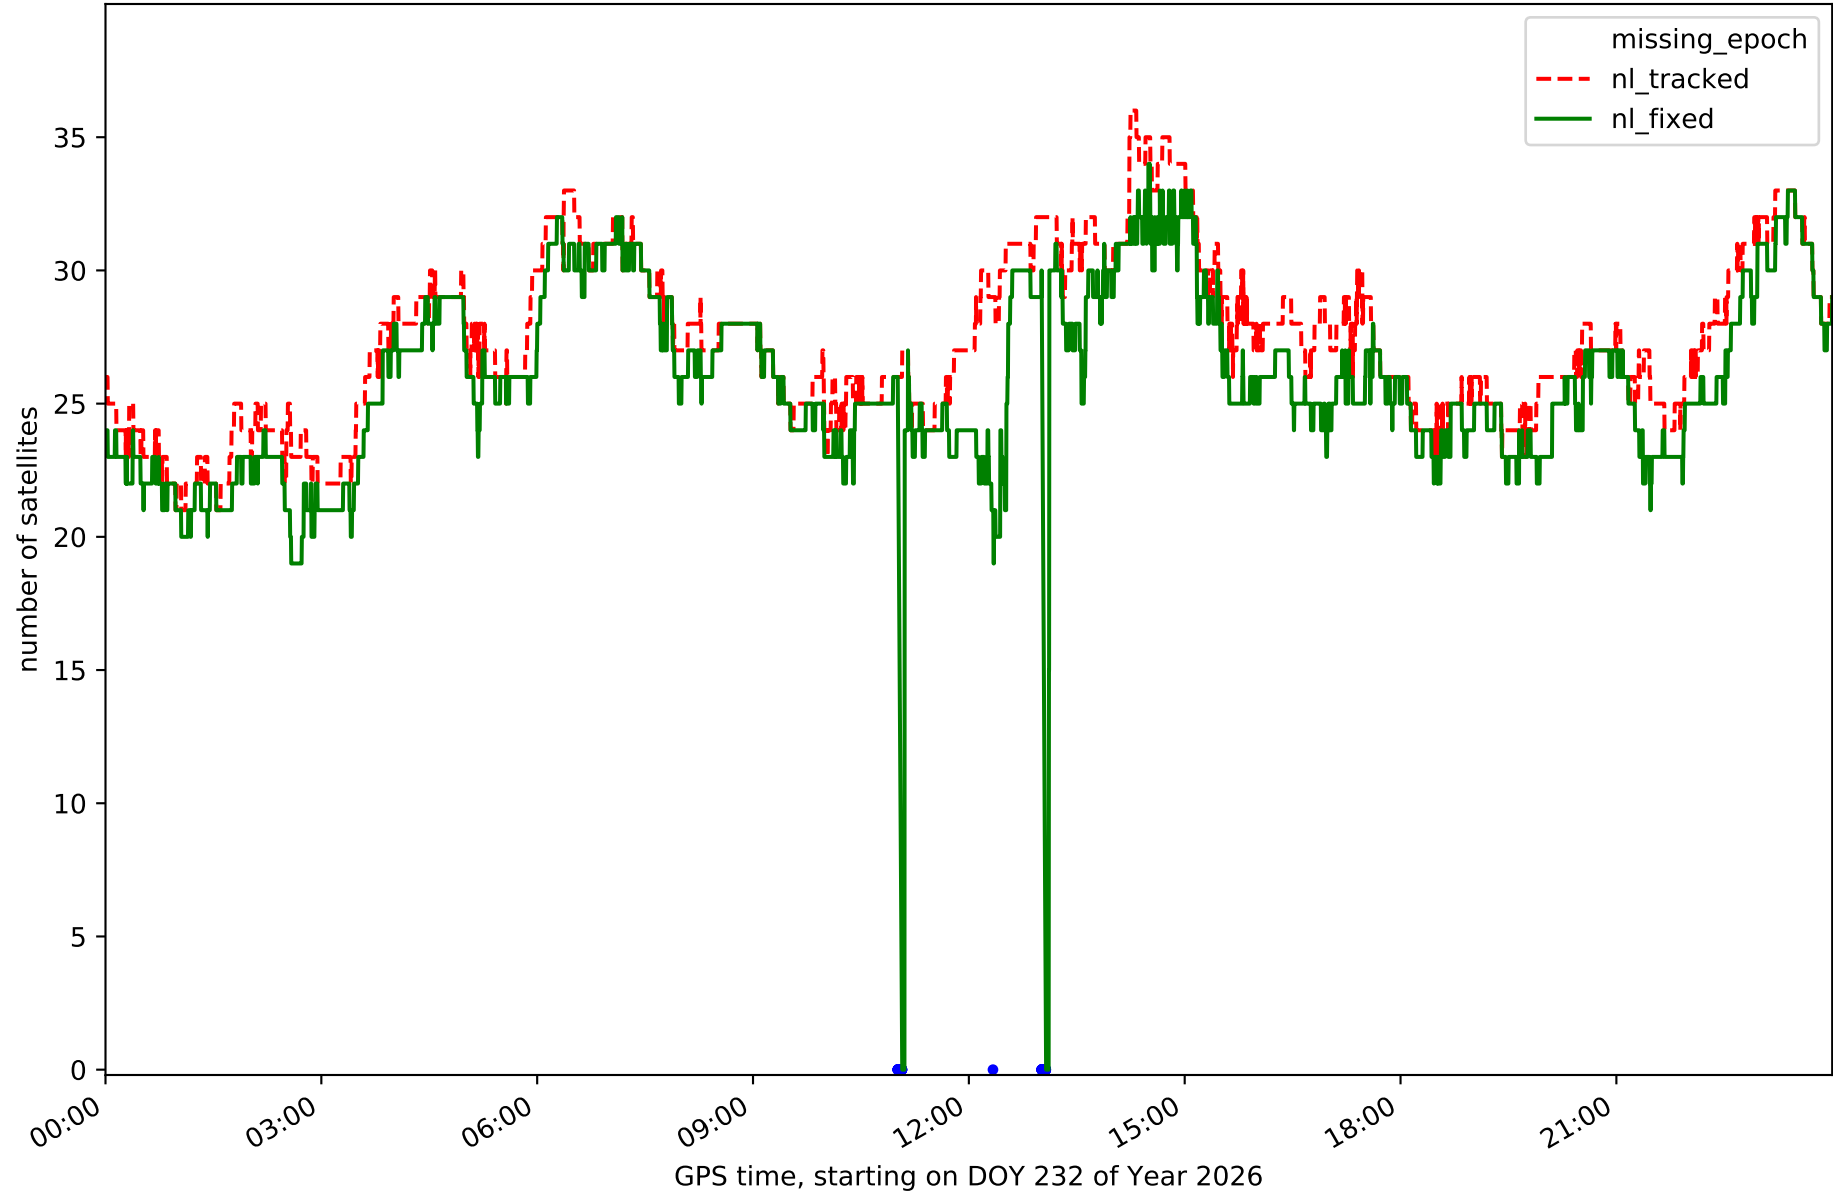


Station TE11 in network NT32

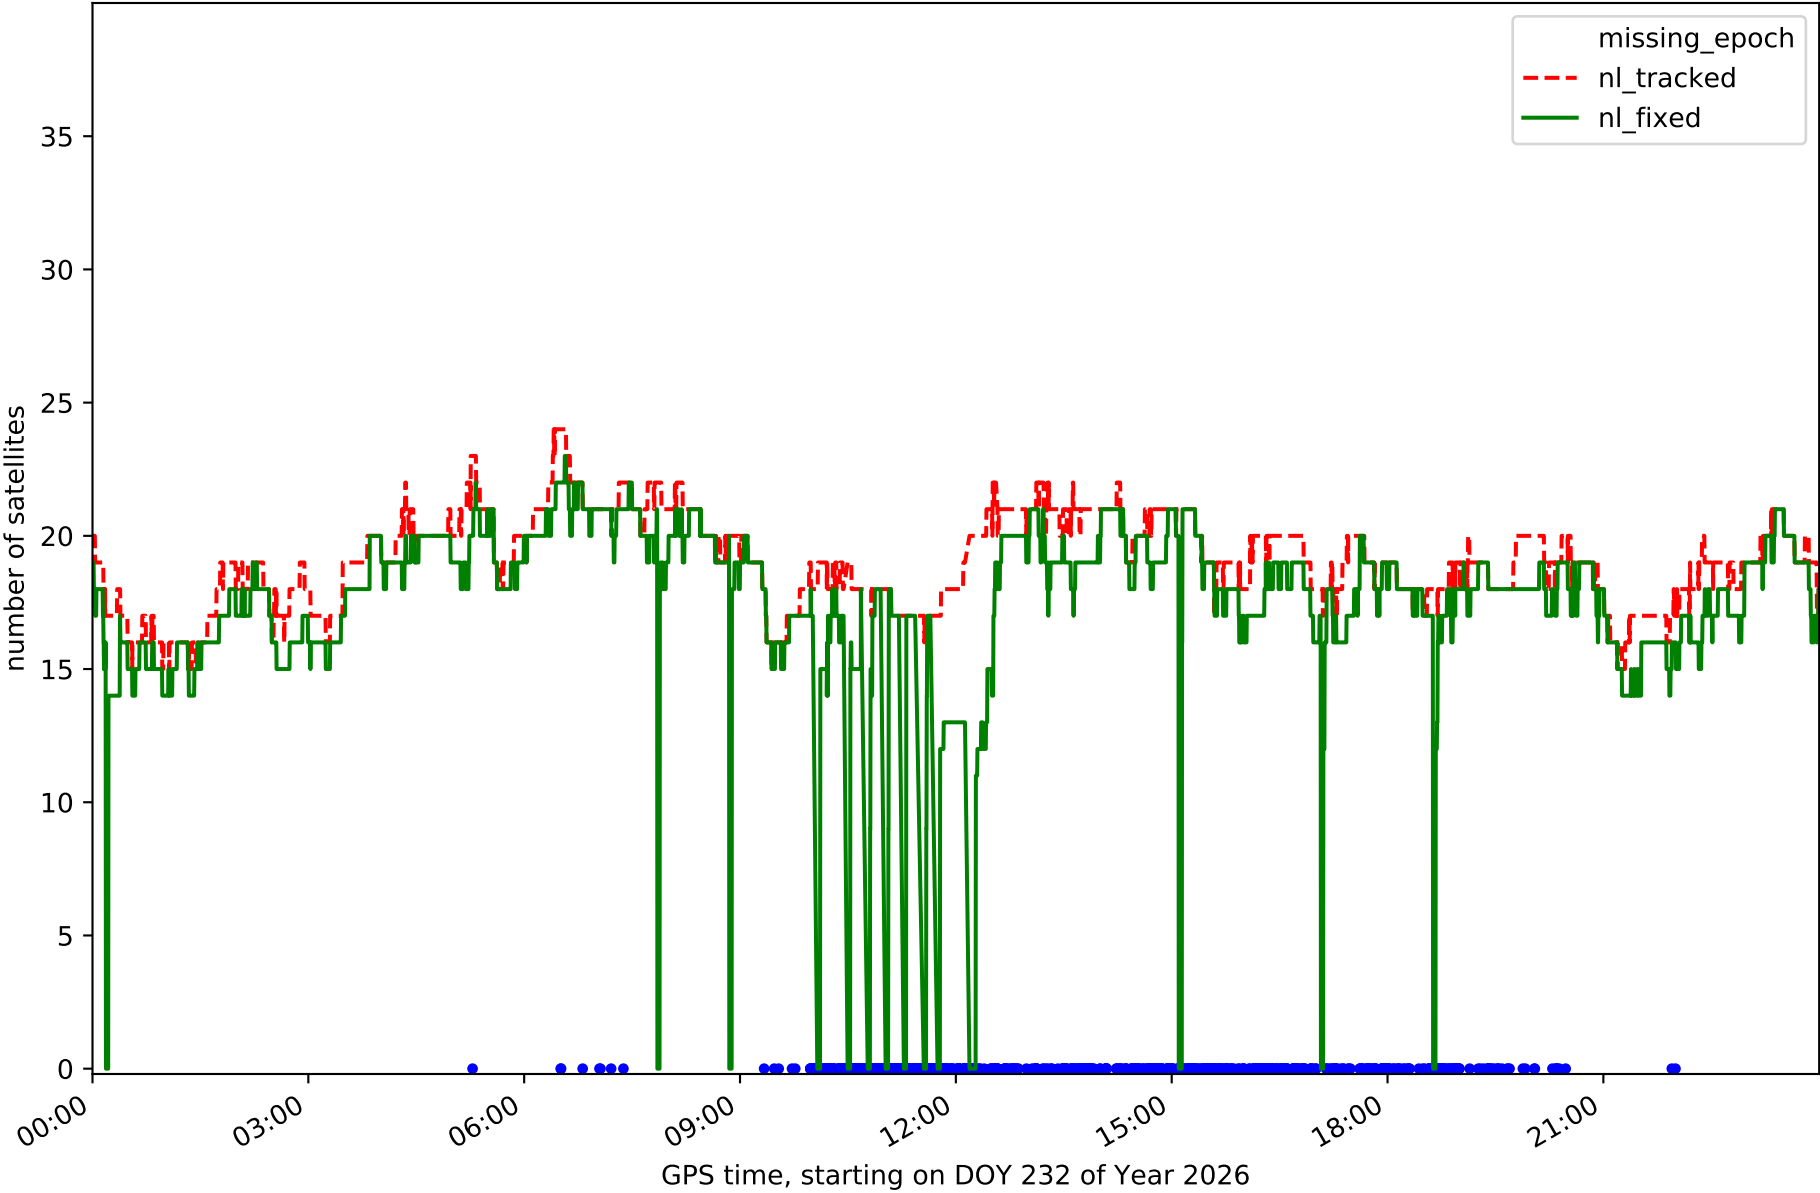


RefCheck for station EH01 in network NT32

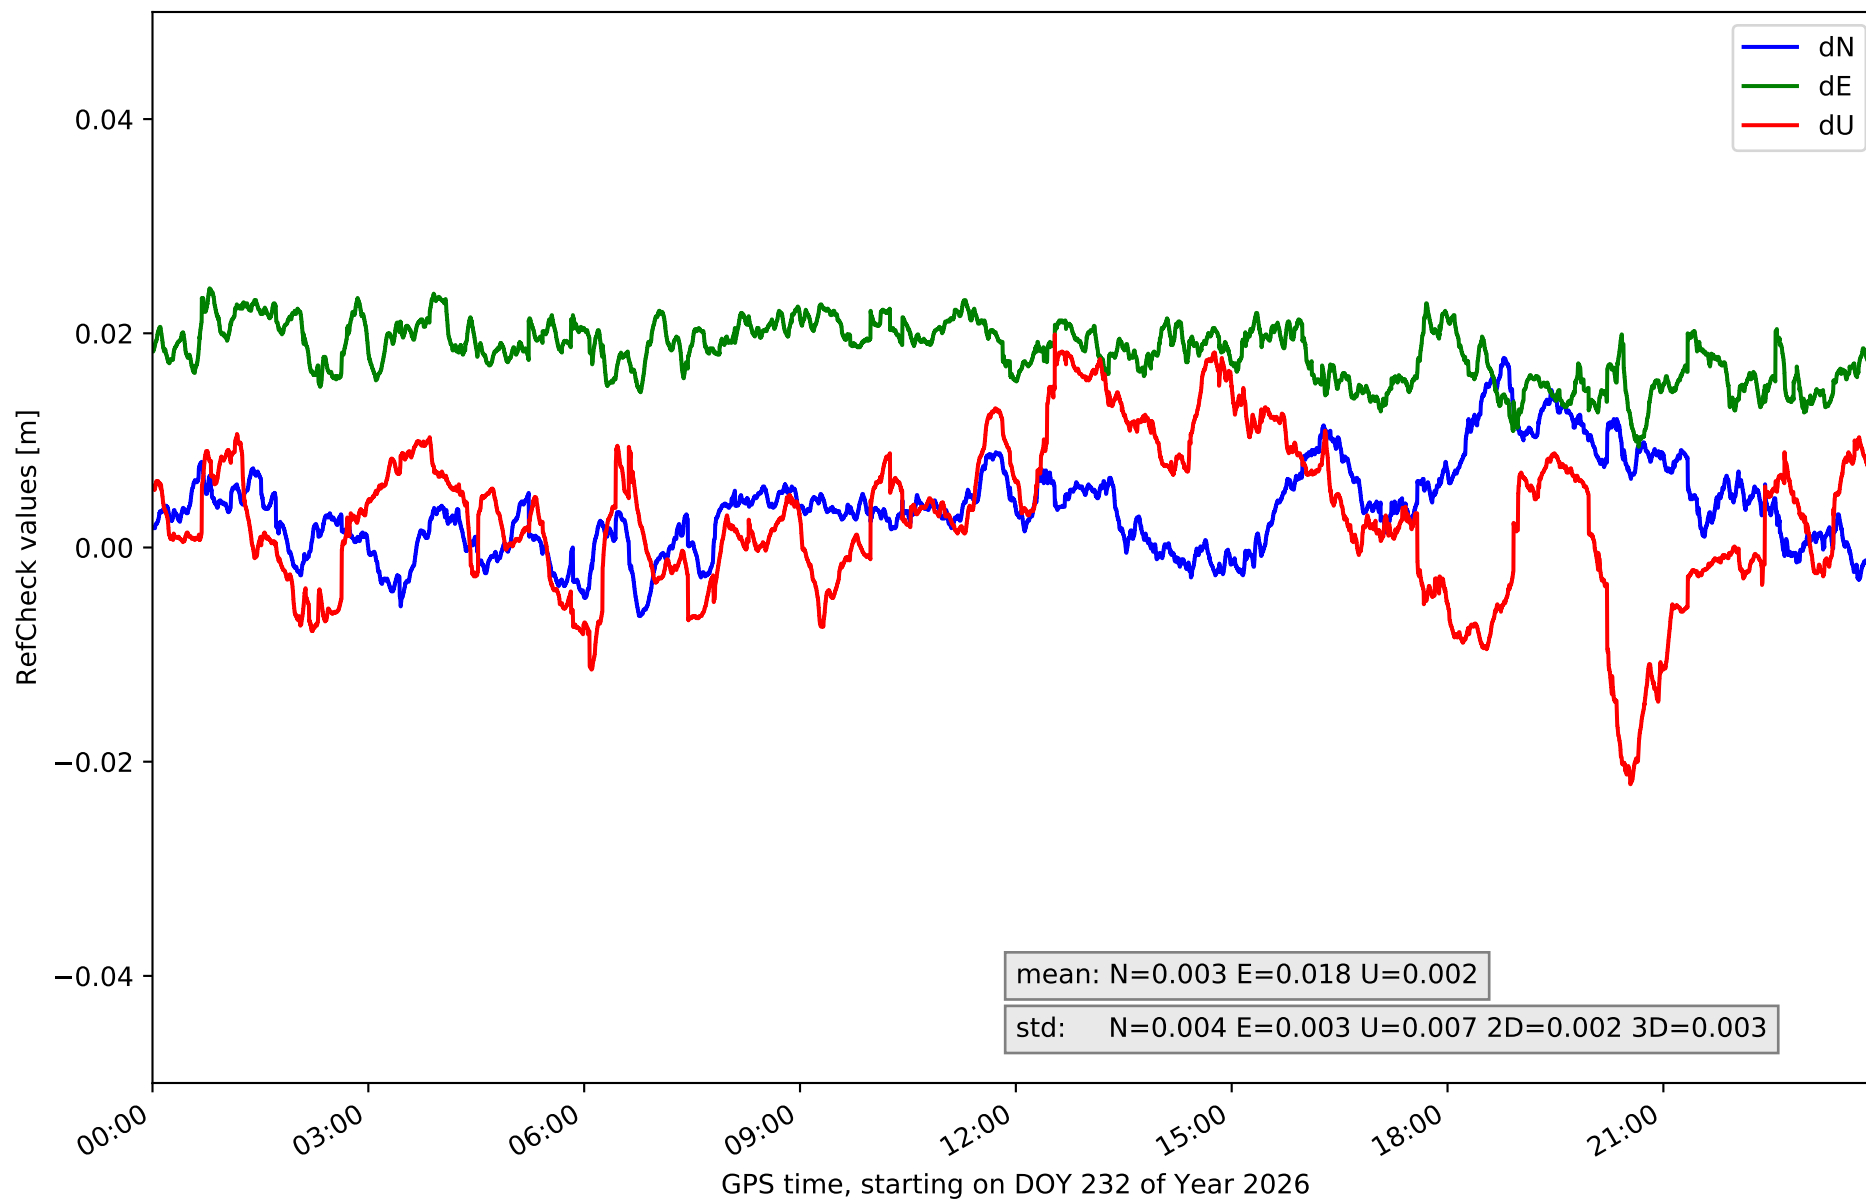


RefCheck for station EH02 in network NT32

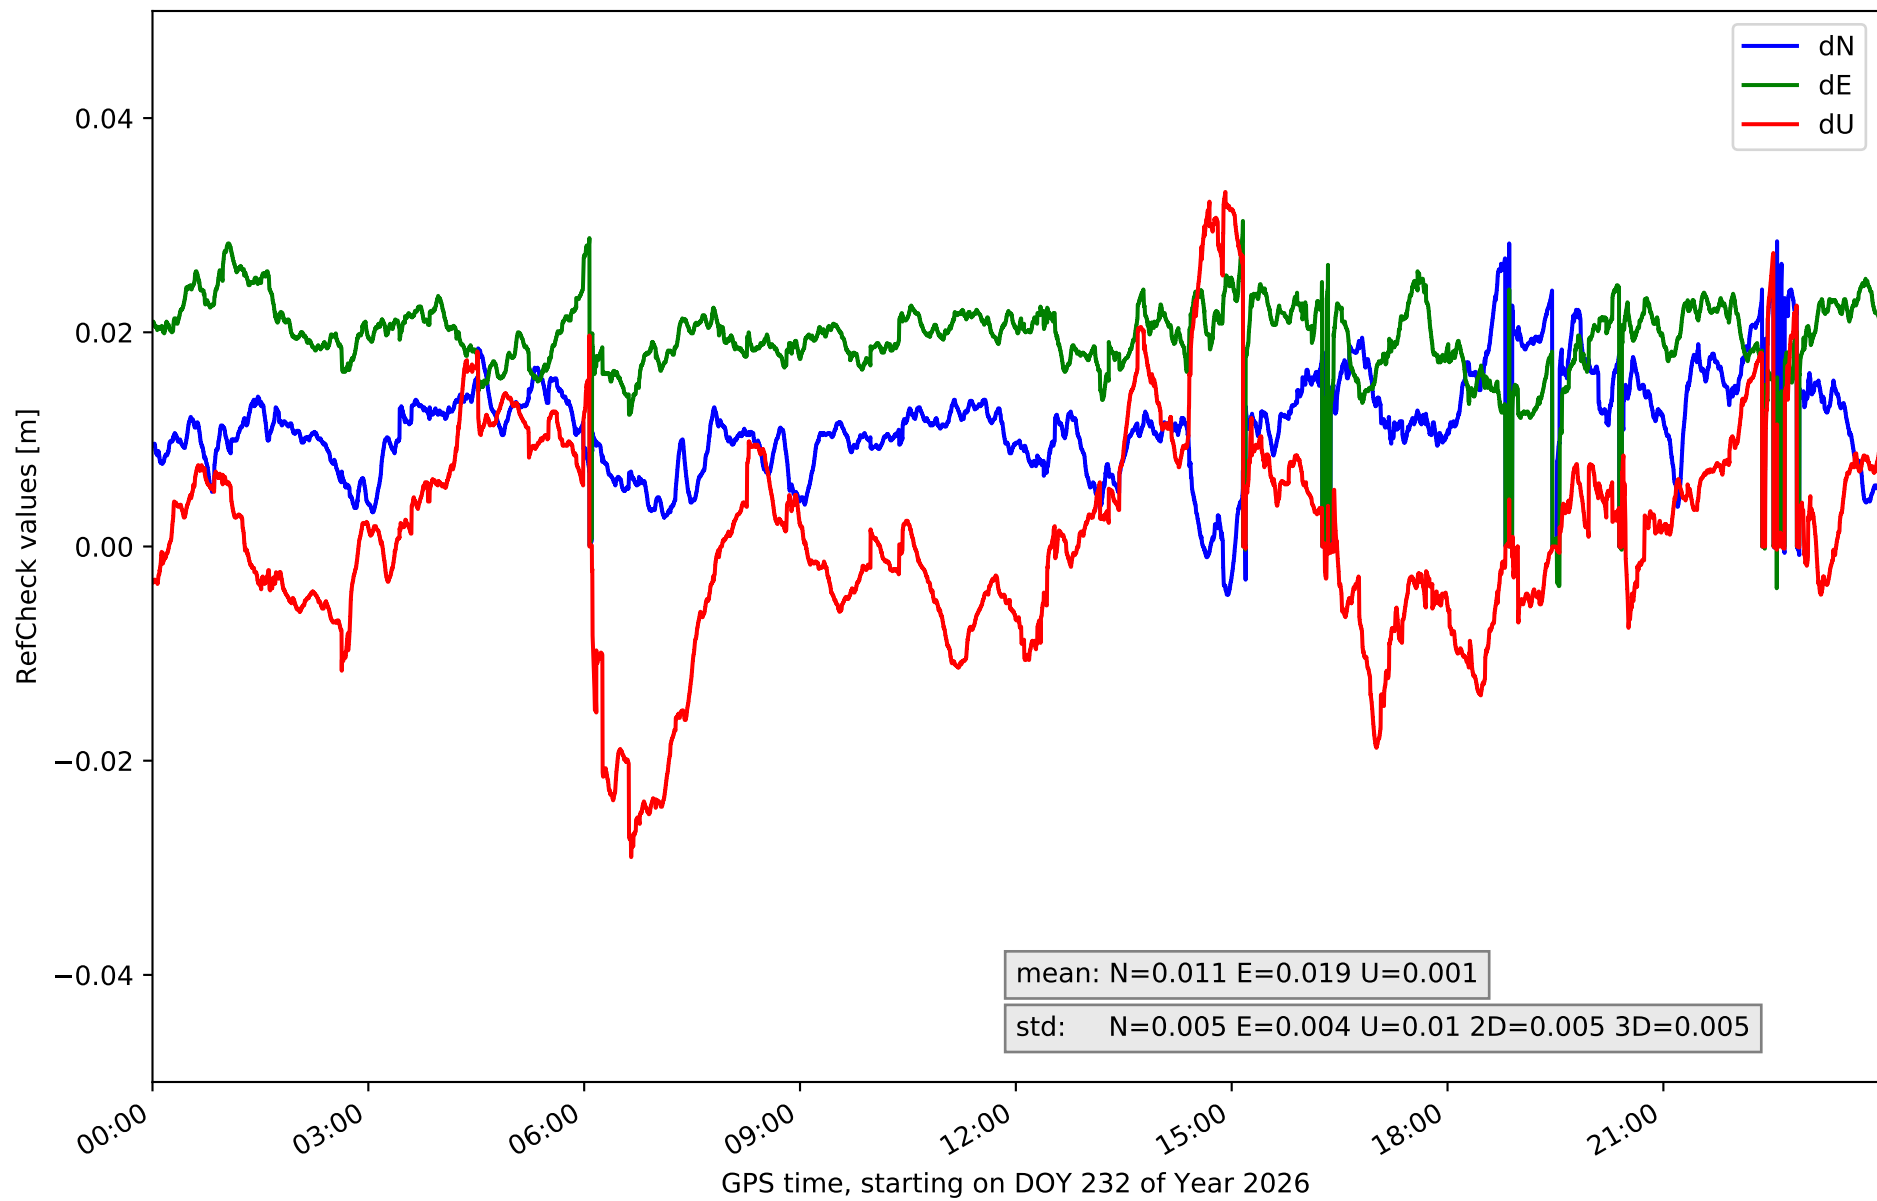


RefCheck for station GOM1 in network NT32

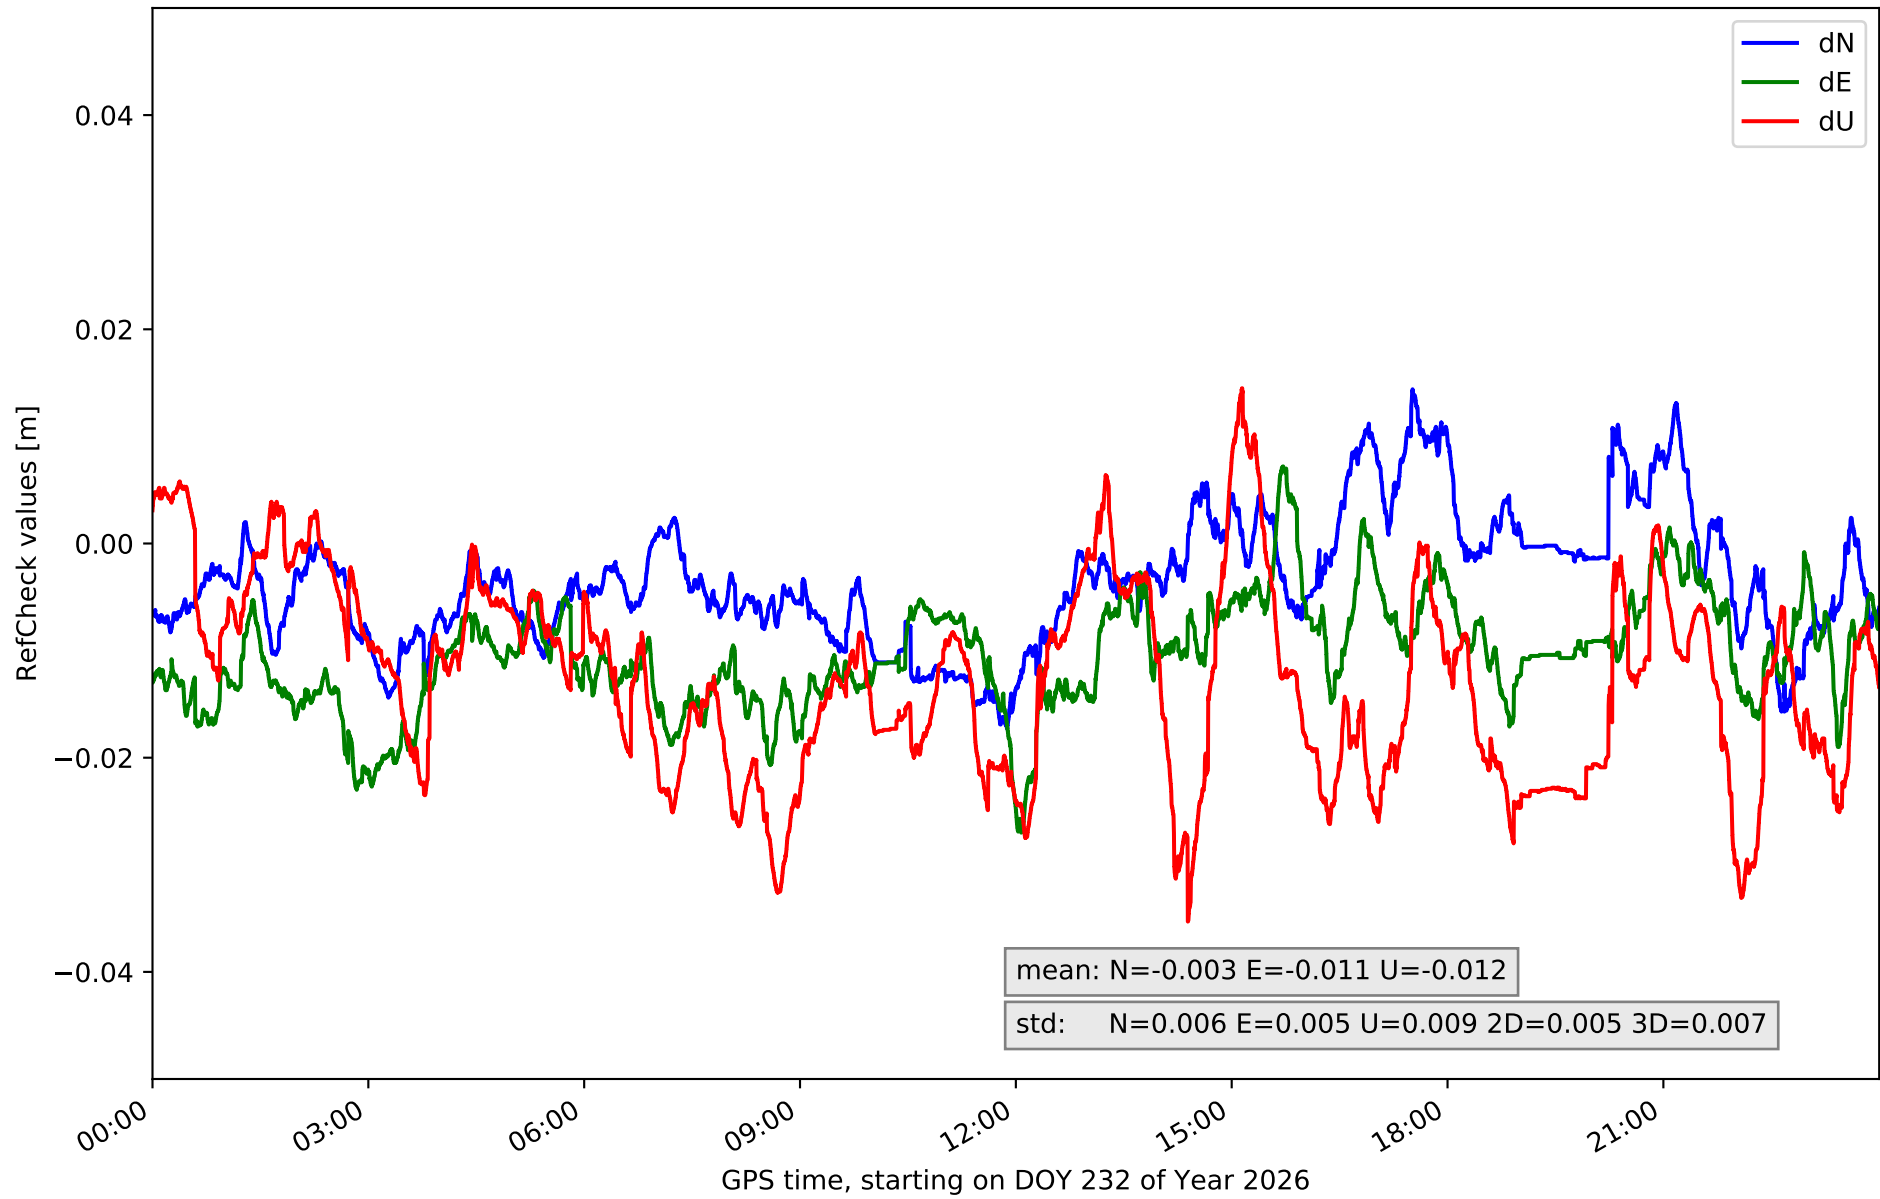


RefCheck for station GOME in network NT32

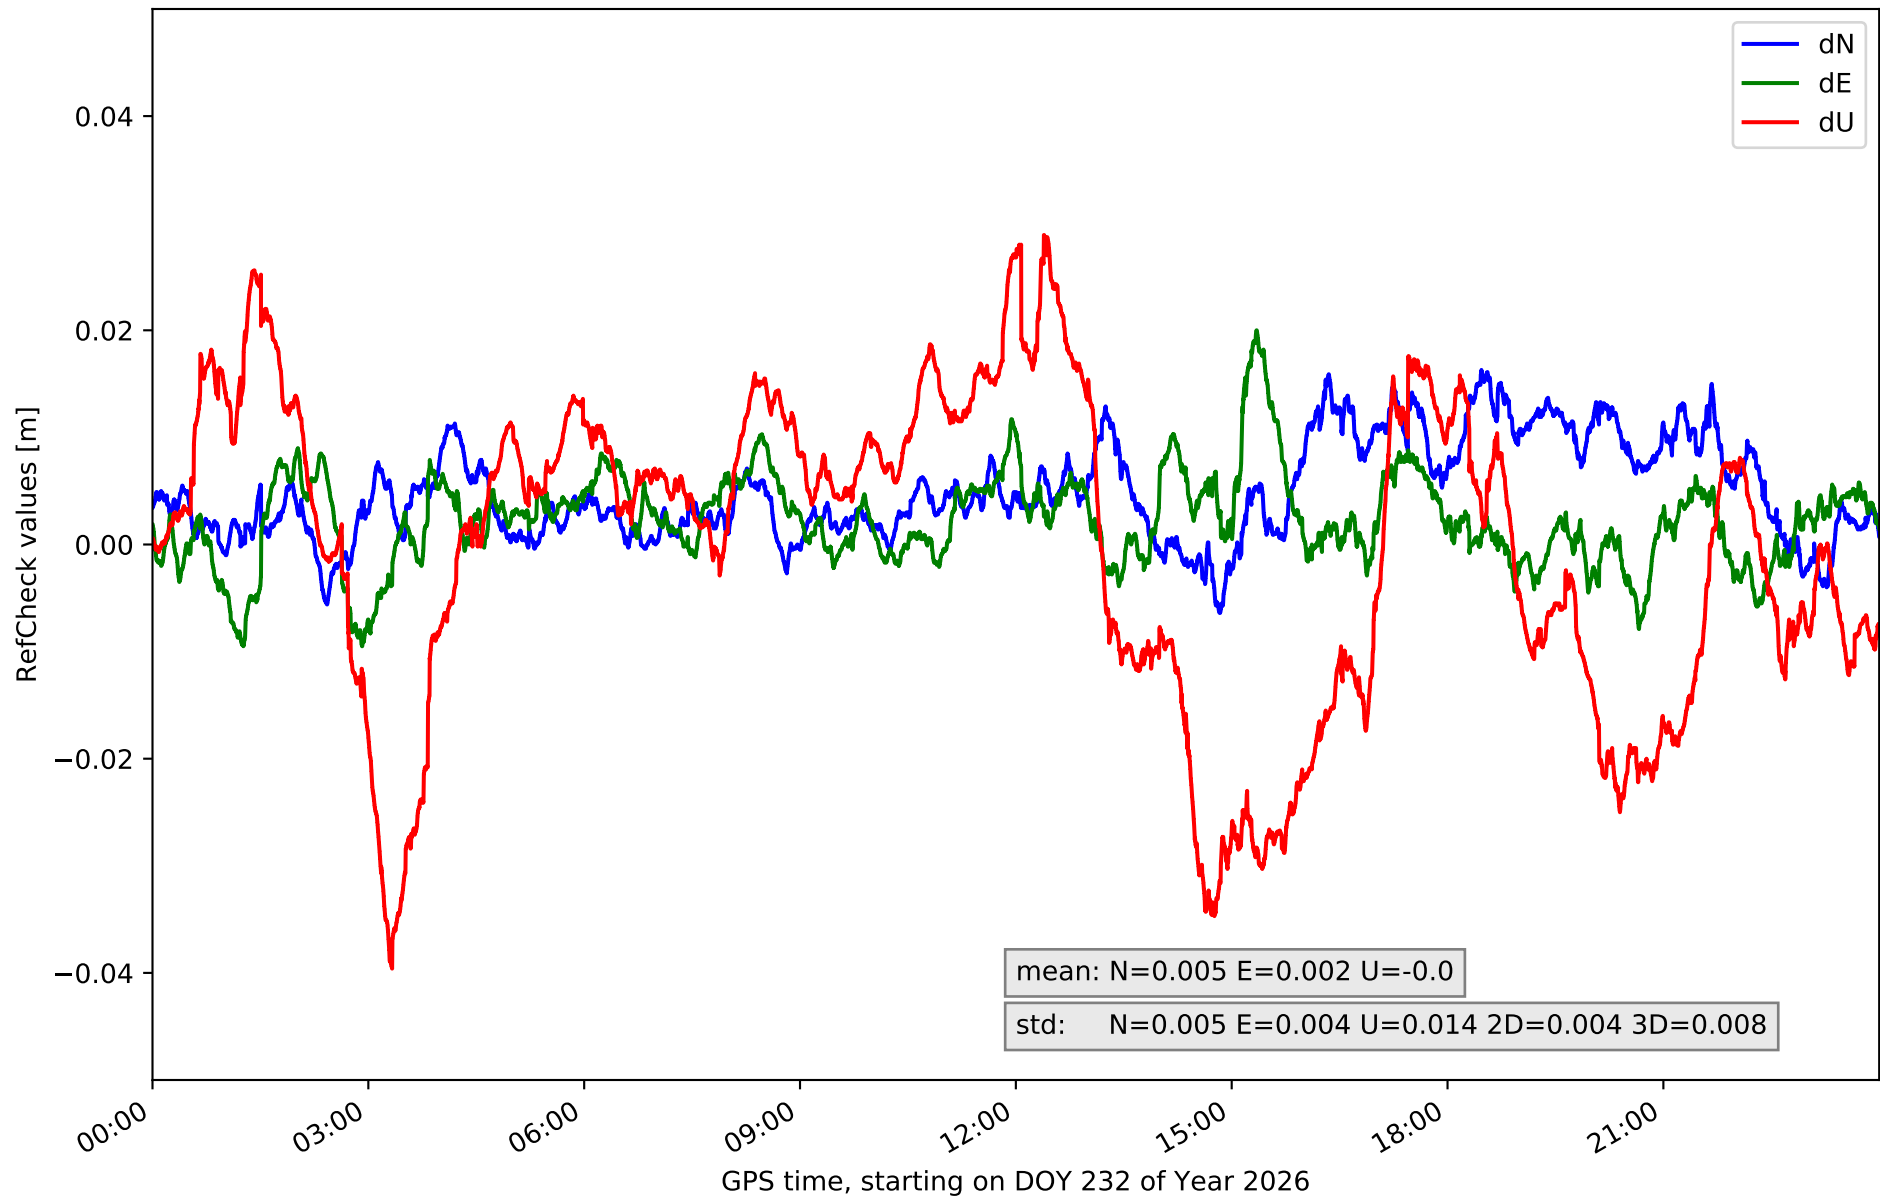


RefCheck for station IZAN in network NT32

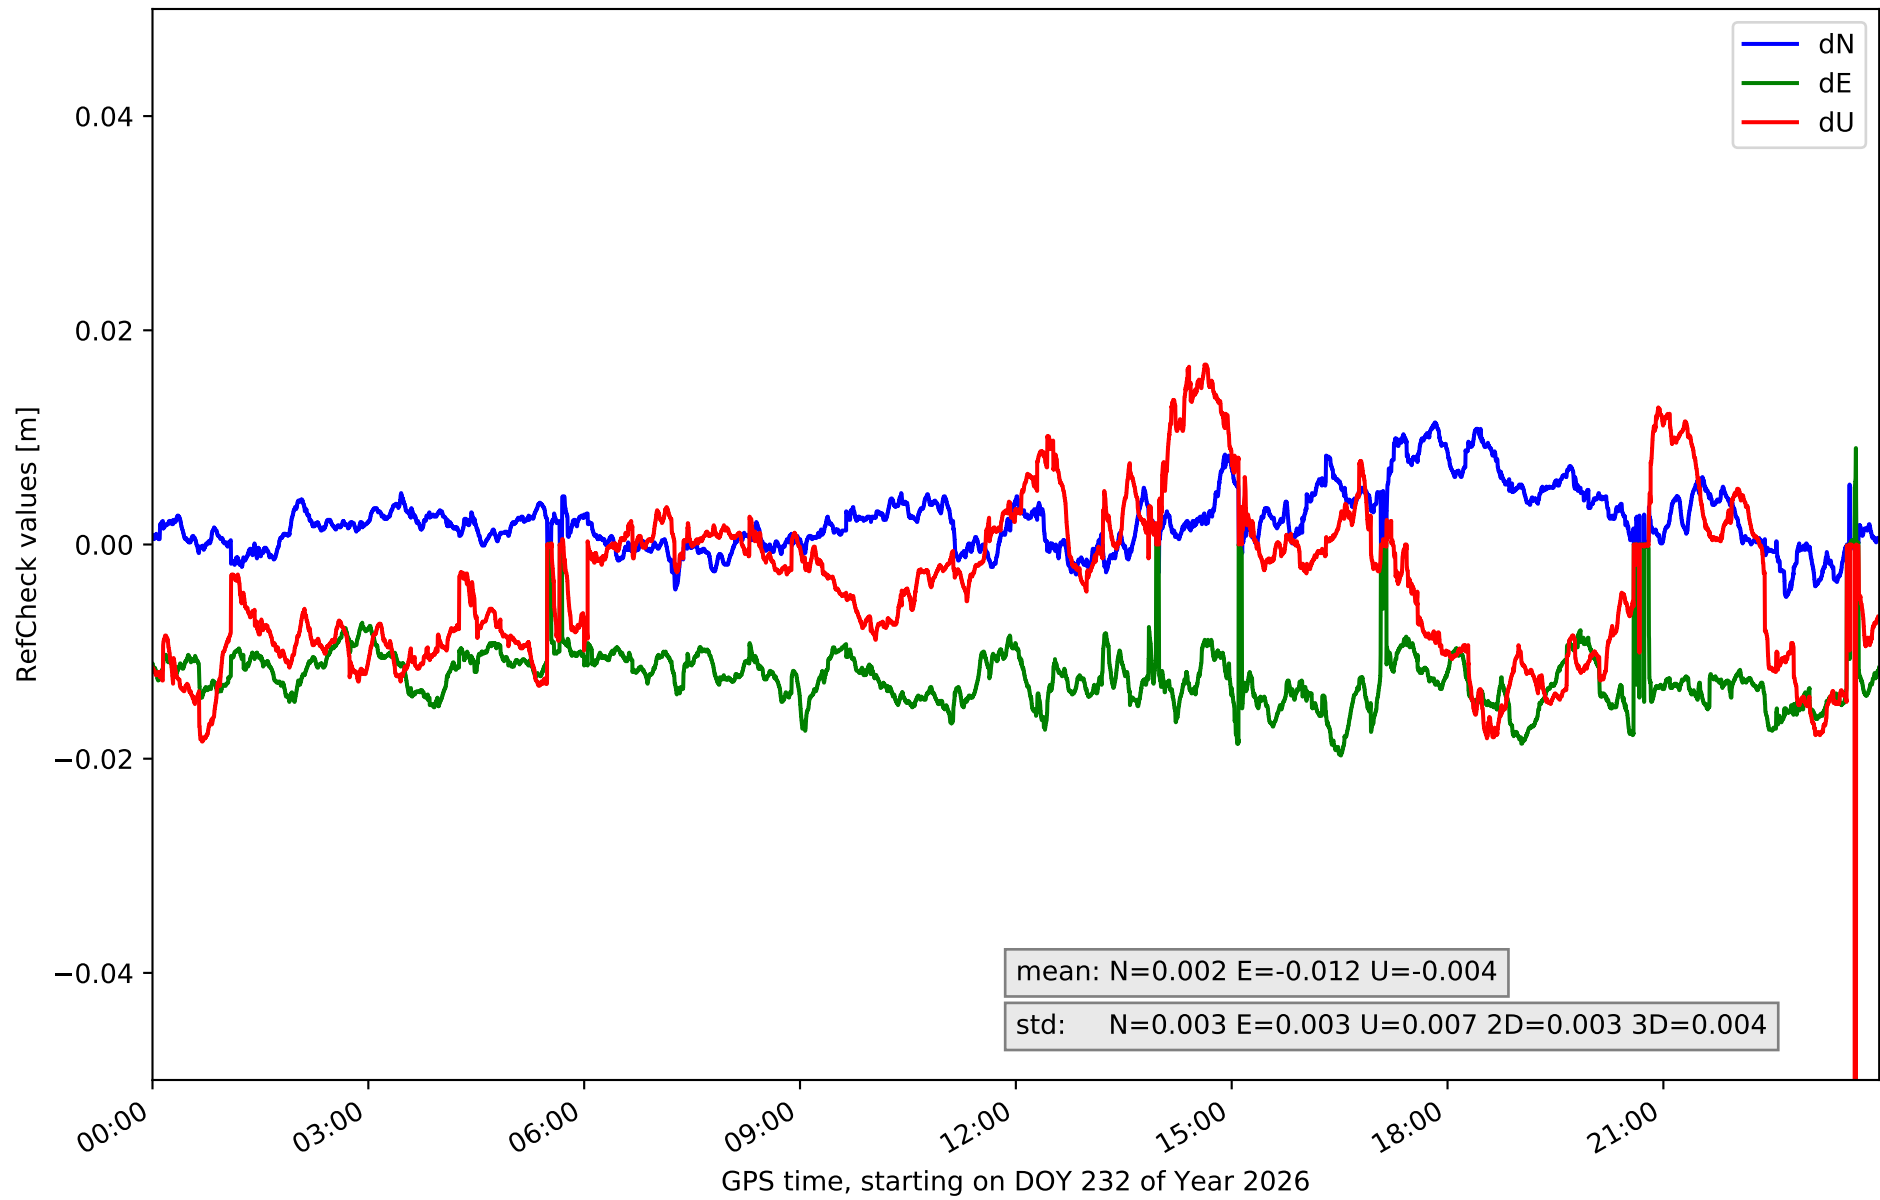


RefCheck for station LP01 in network NT32

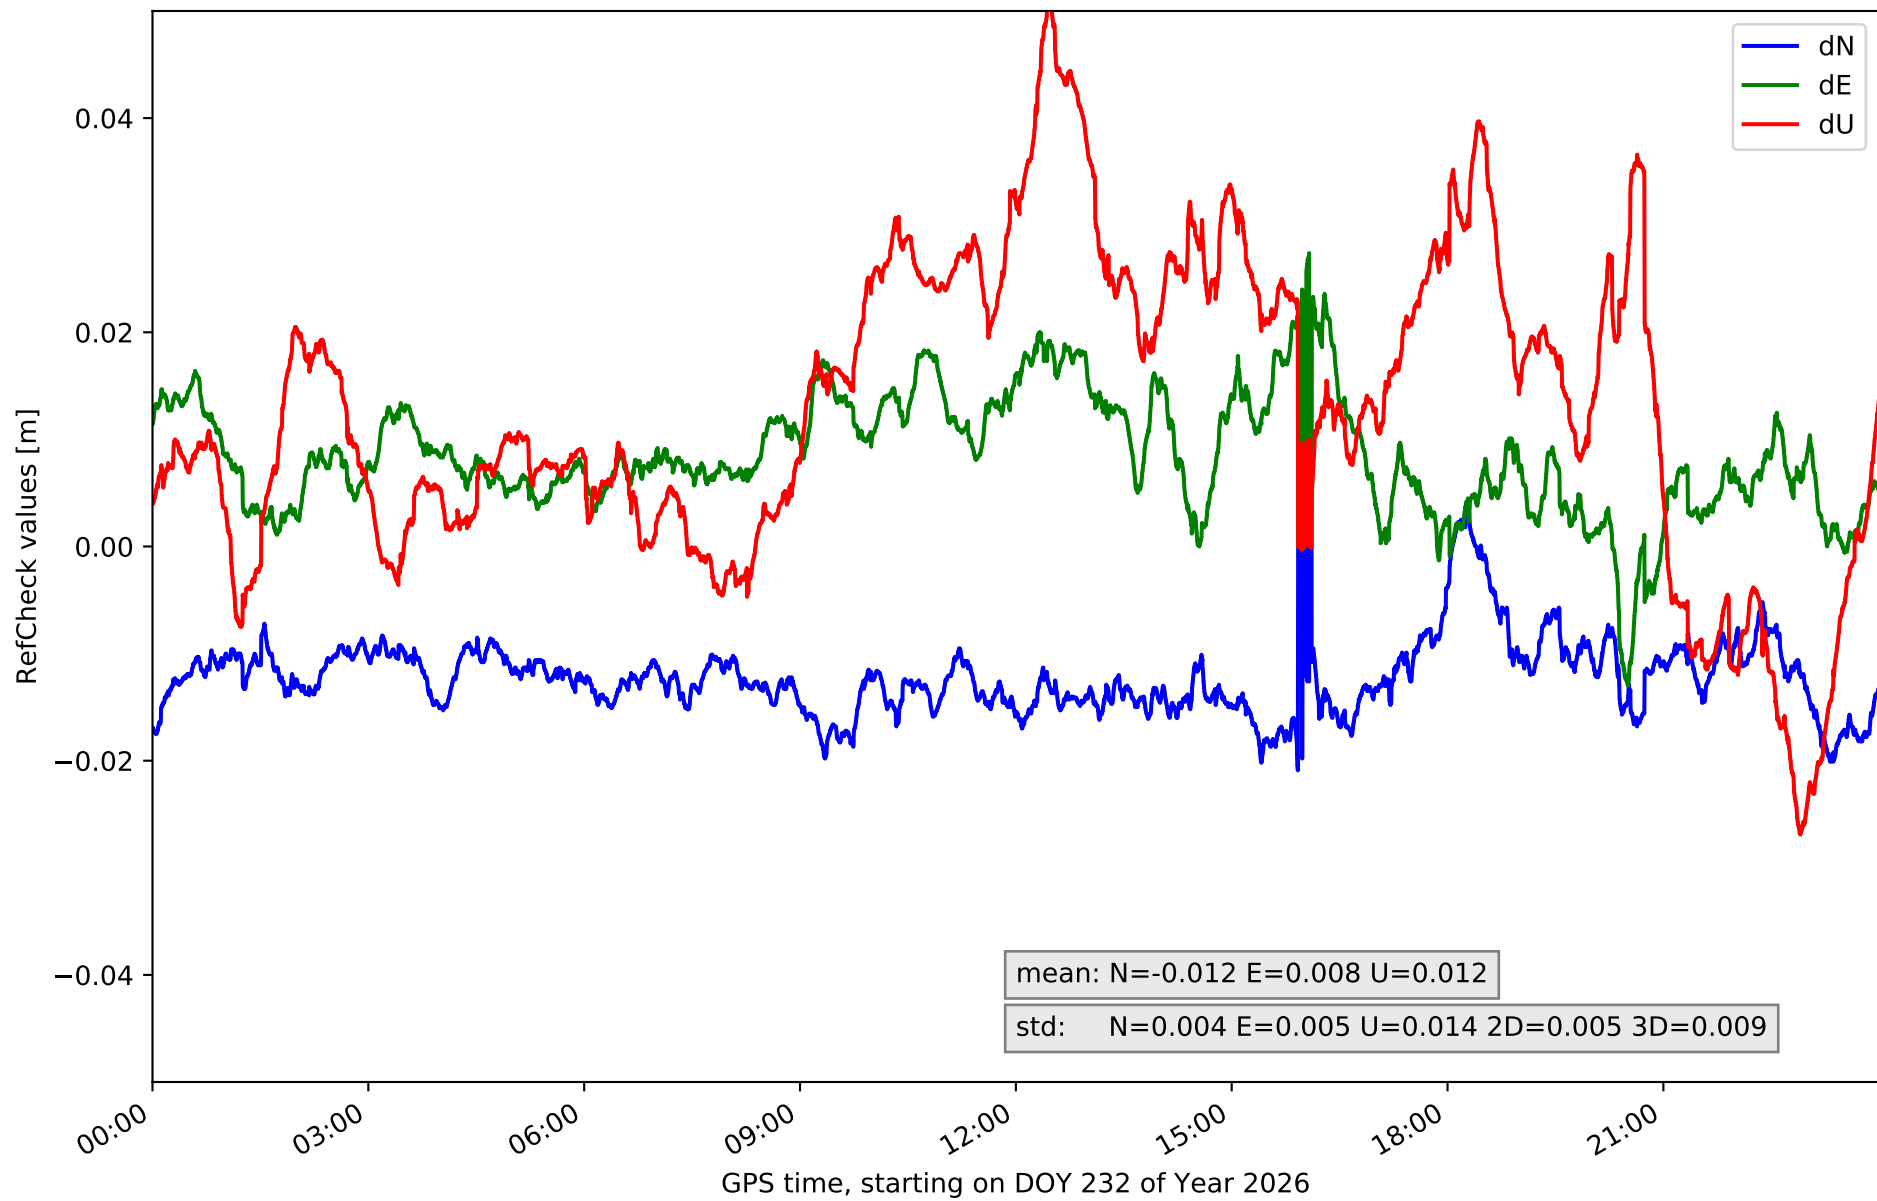


RefCheck for station LP03 in network NT32

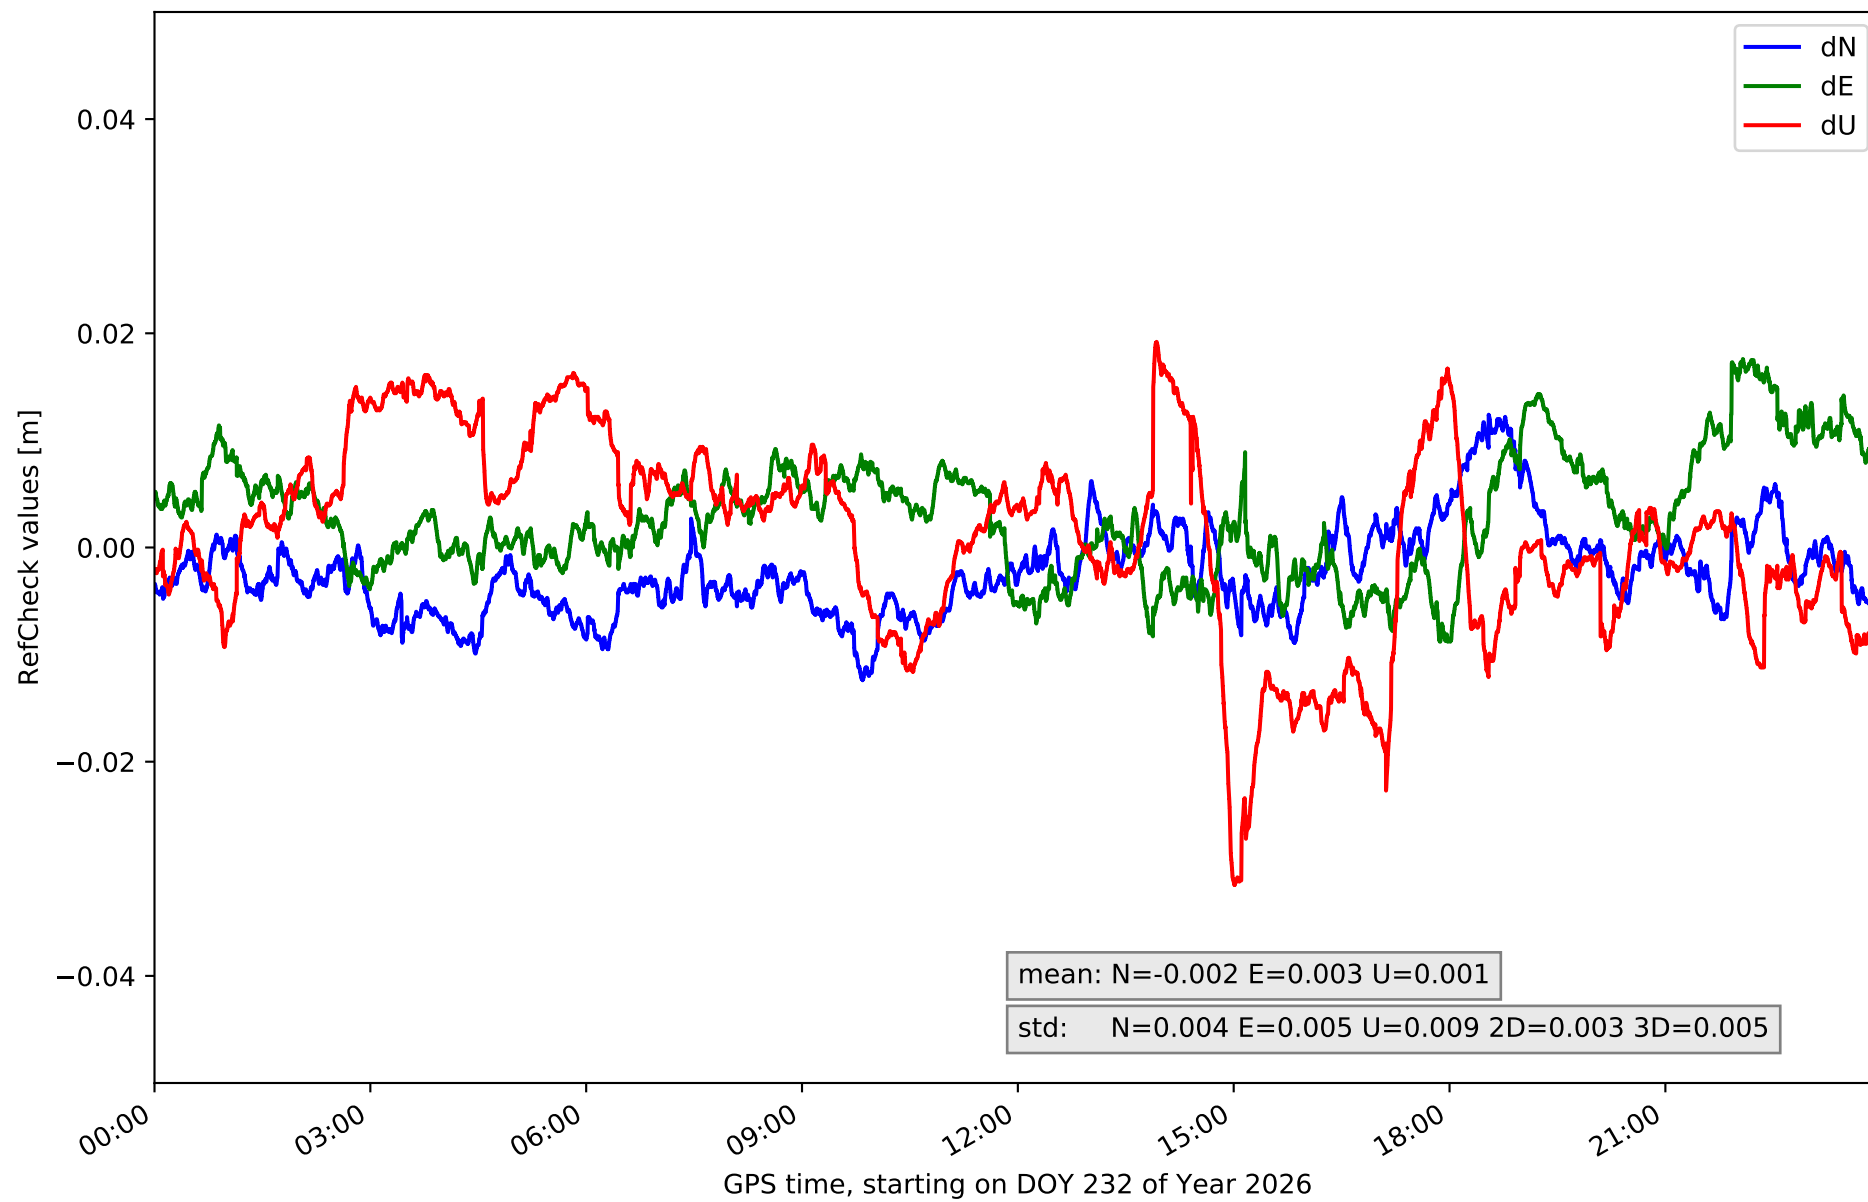


RefCheck for station LPAL in network NT32

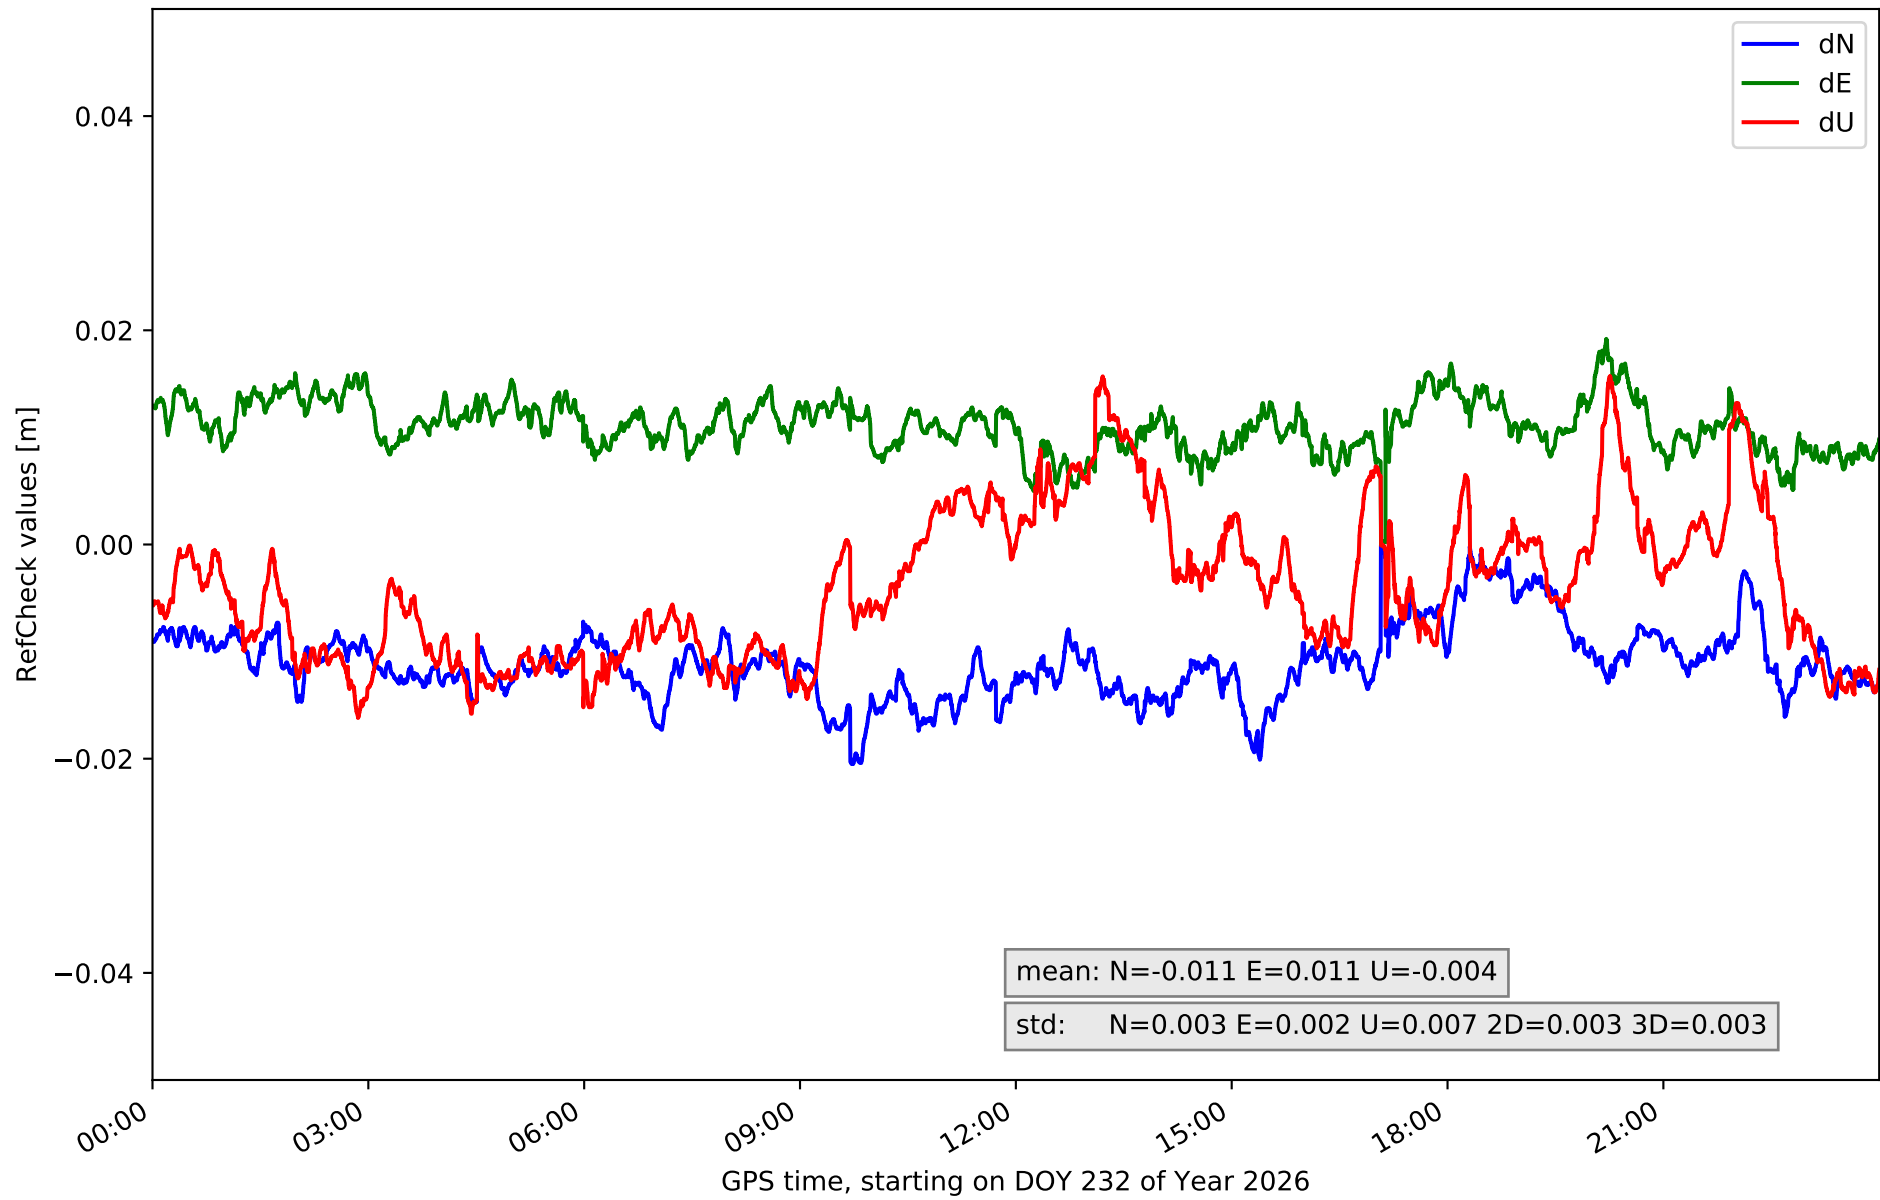


RefCheck for station LRES in network NT32

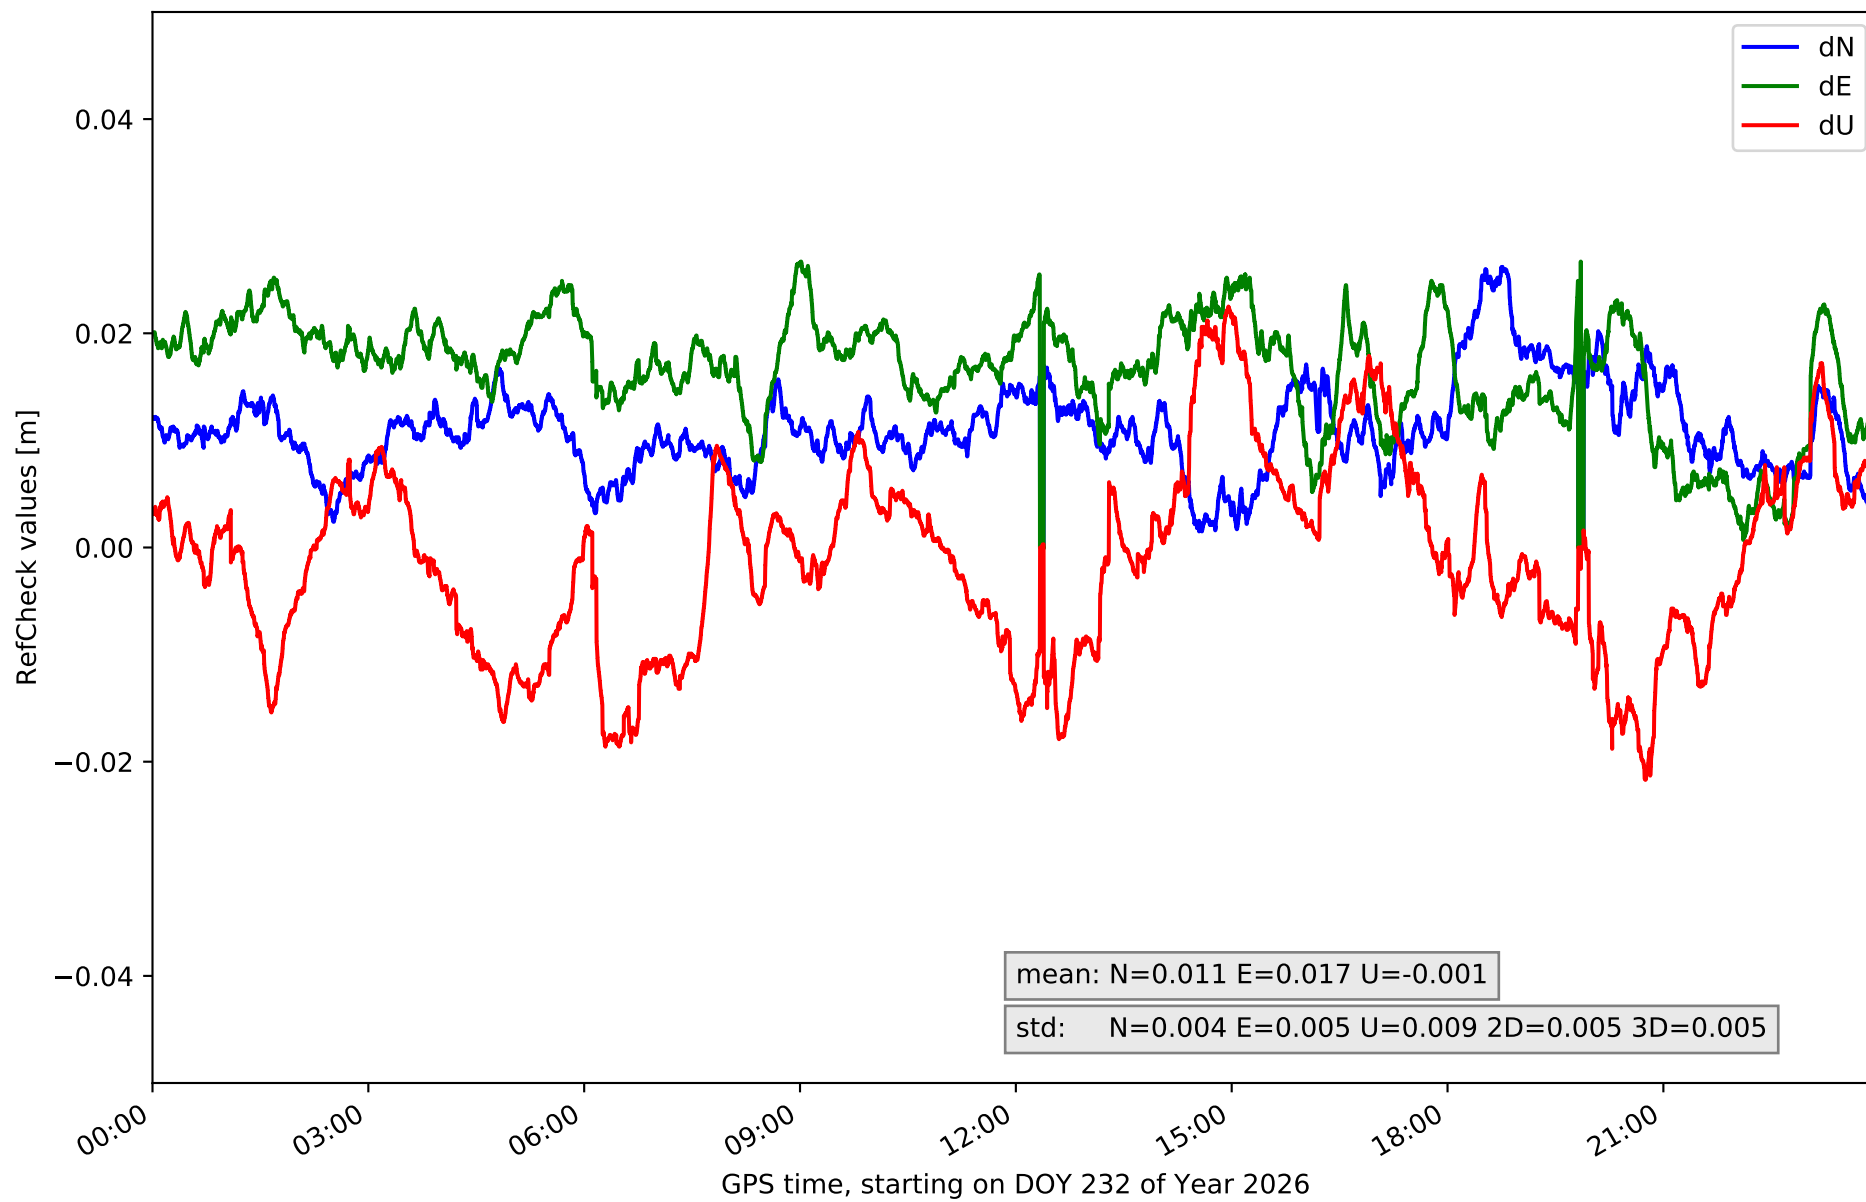


RefCheck for station TN01 in network NT32

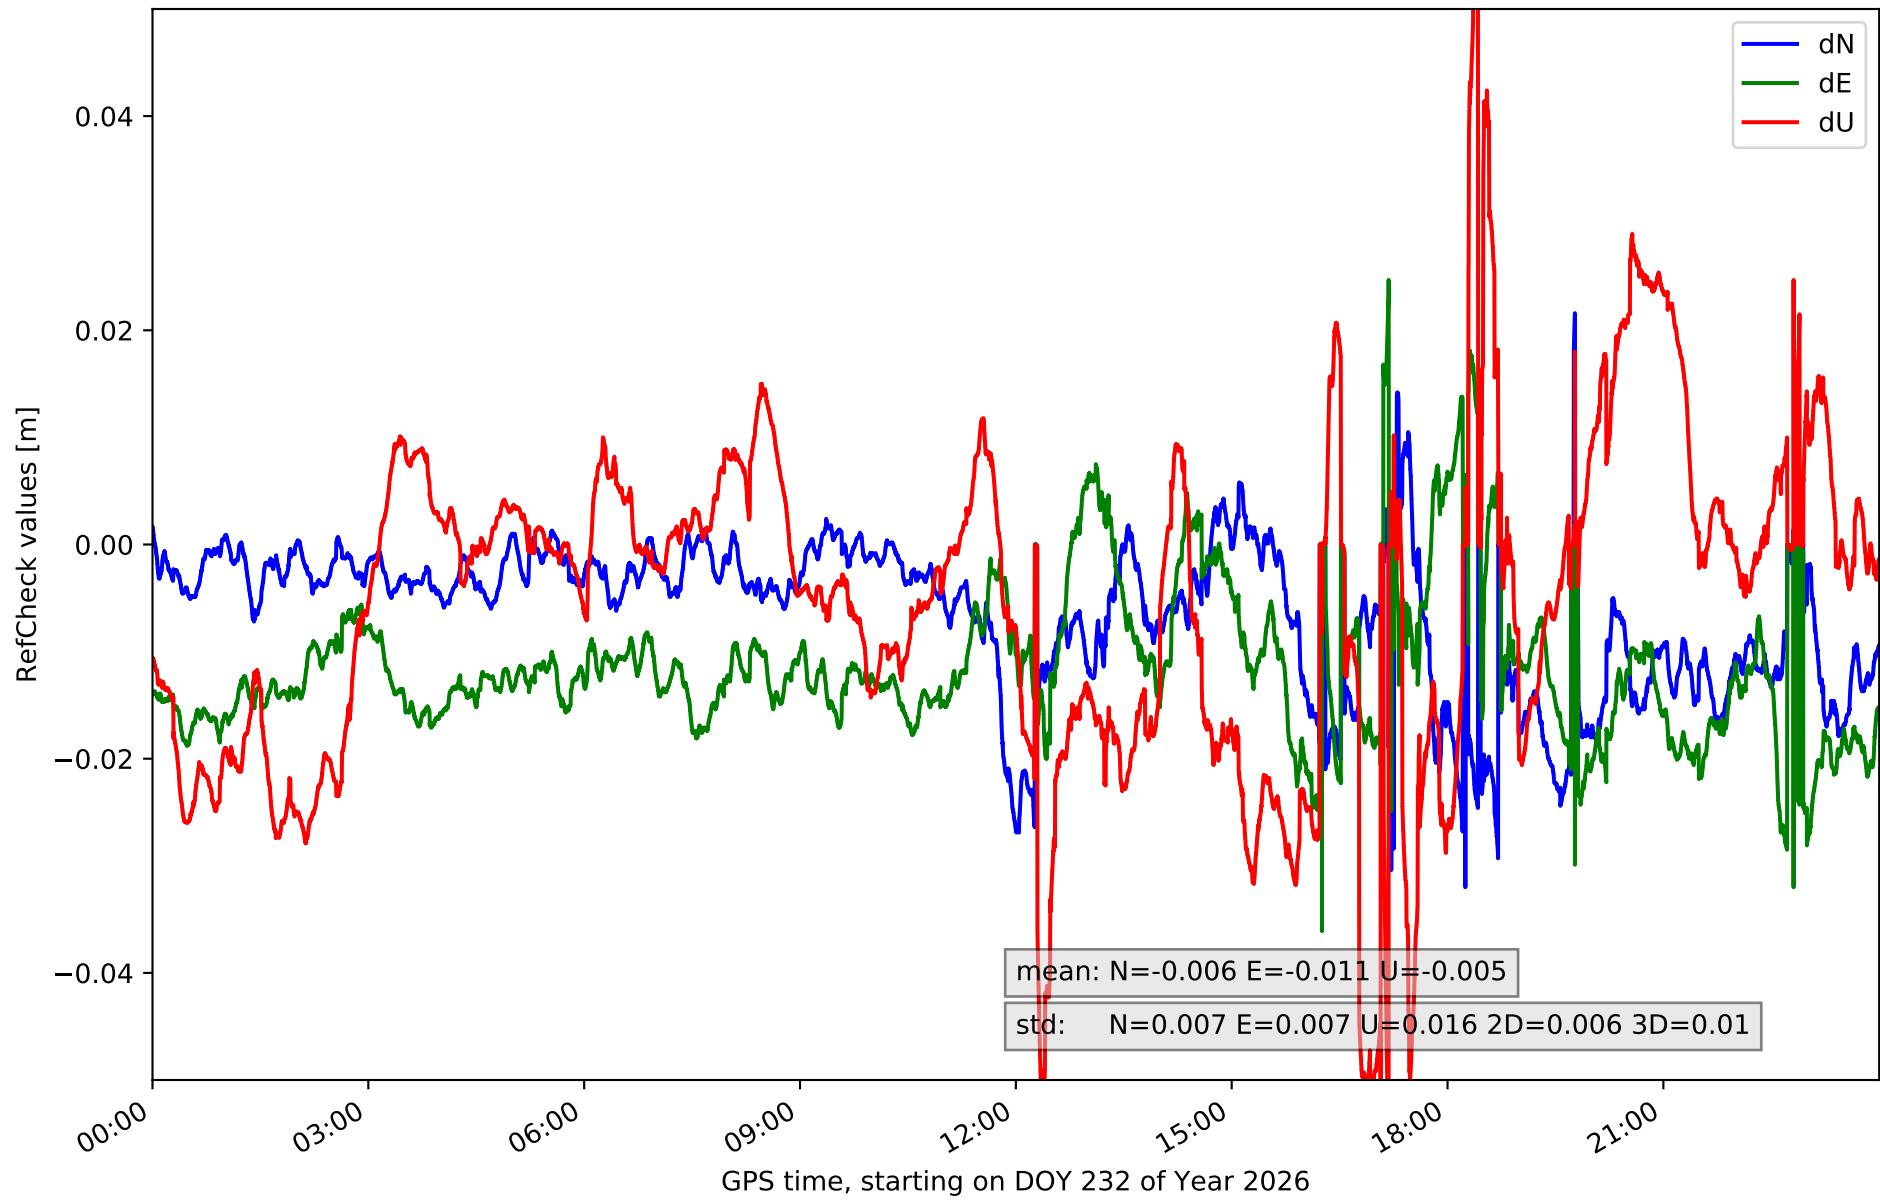


RefCheck for station TN02 in network NT32

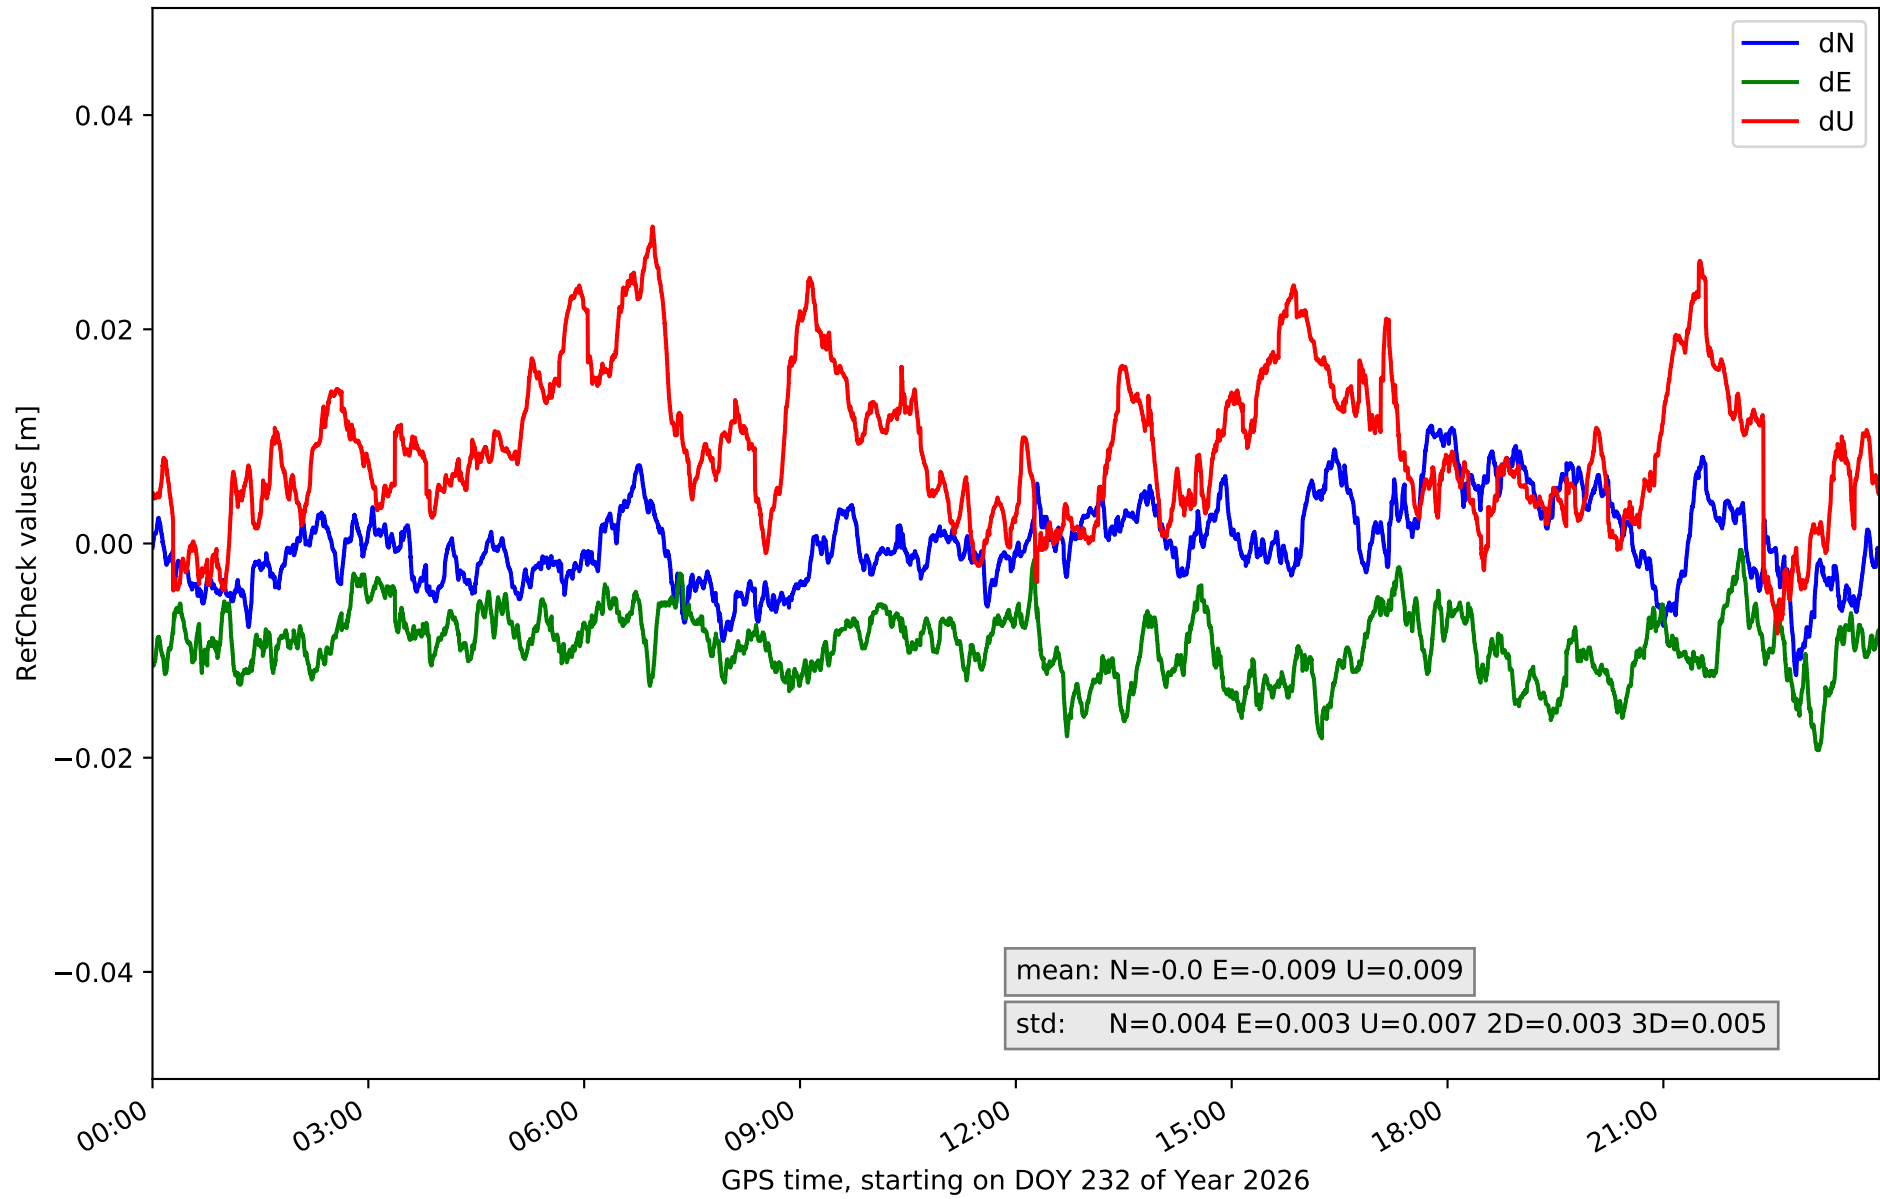


RefCheck for station TN03 in network NT32

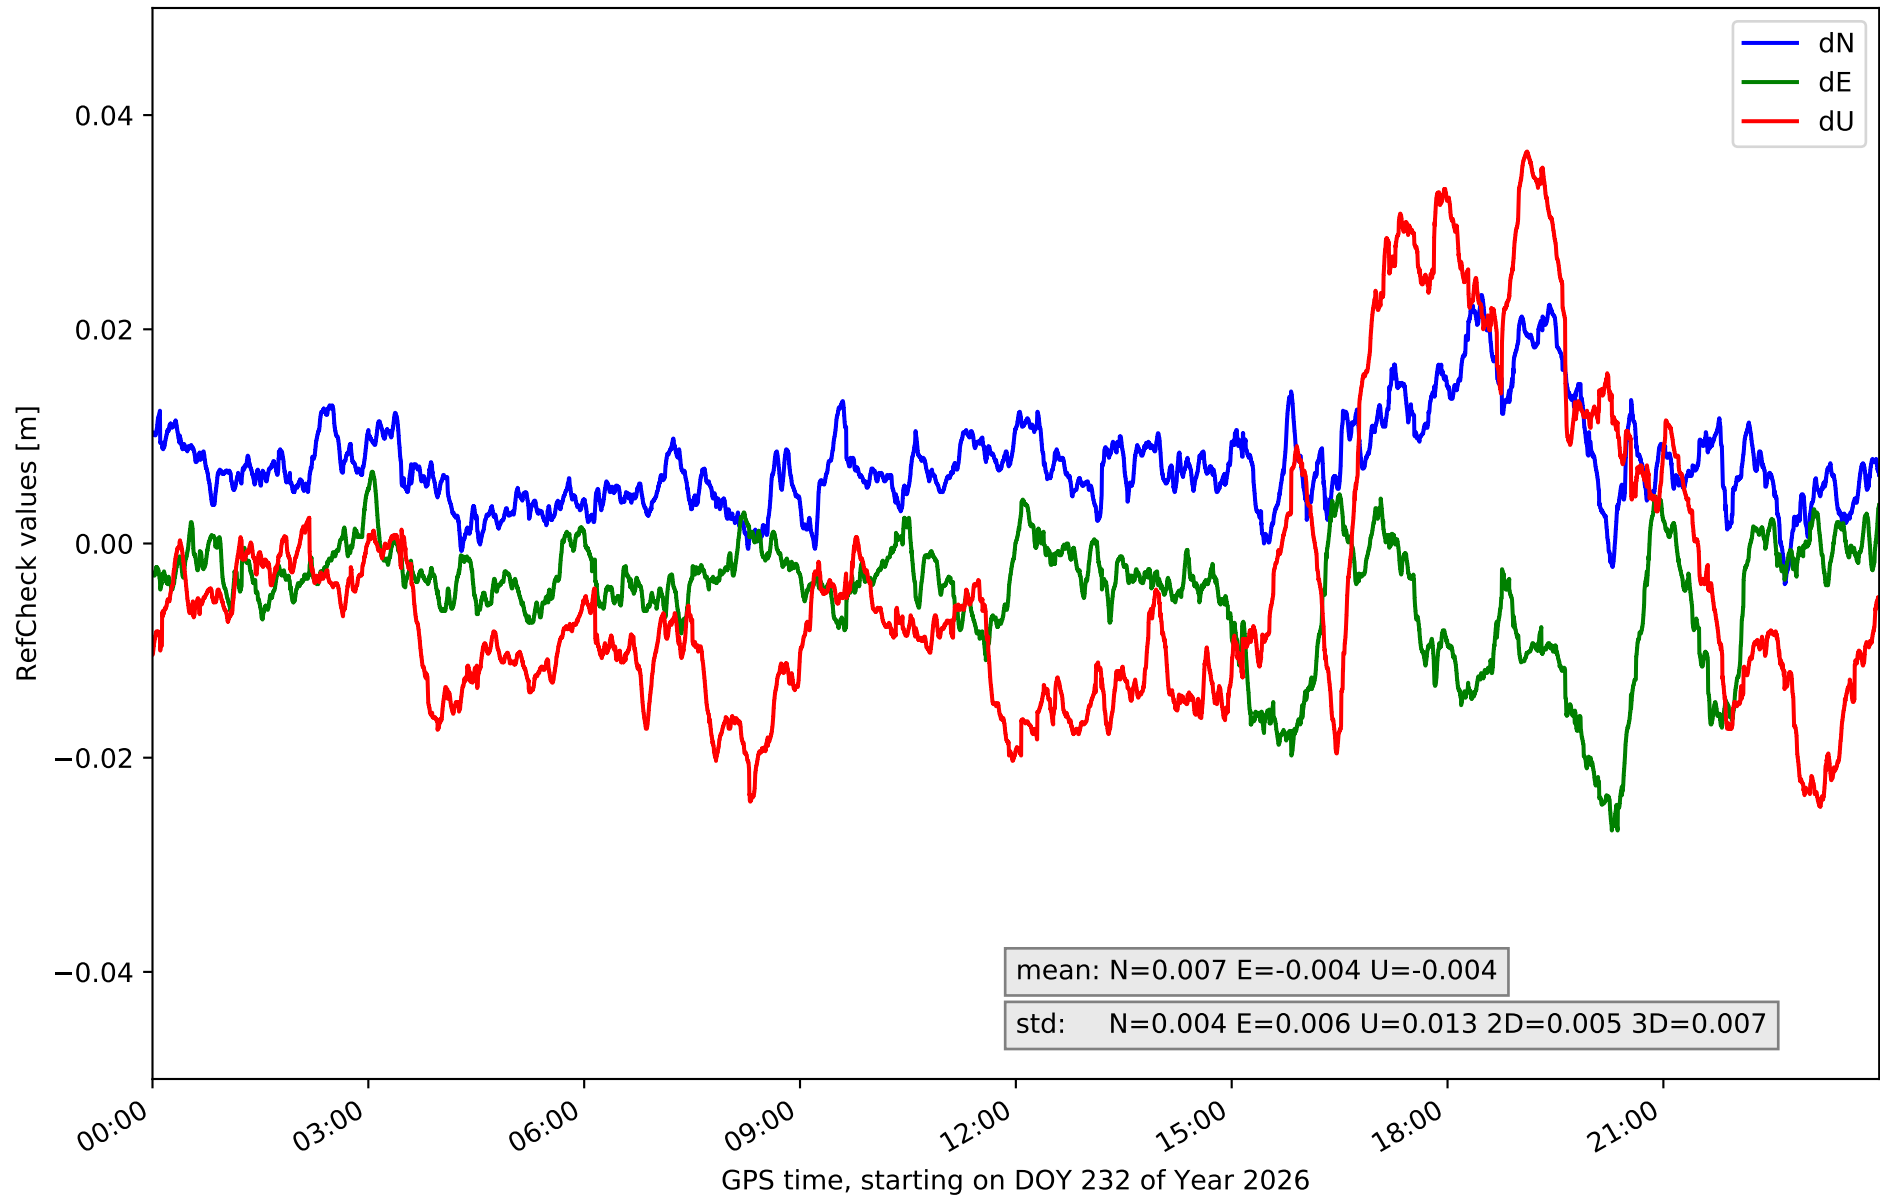


RefCheck for station TN06 in network NT32

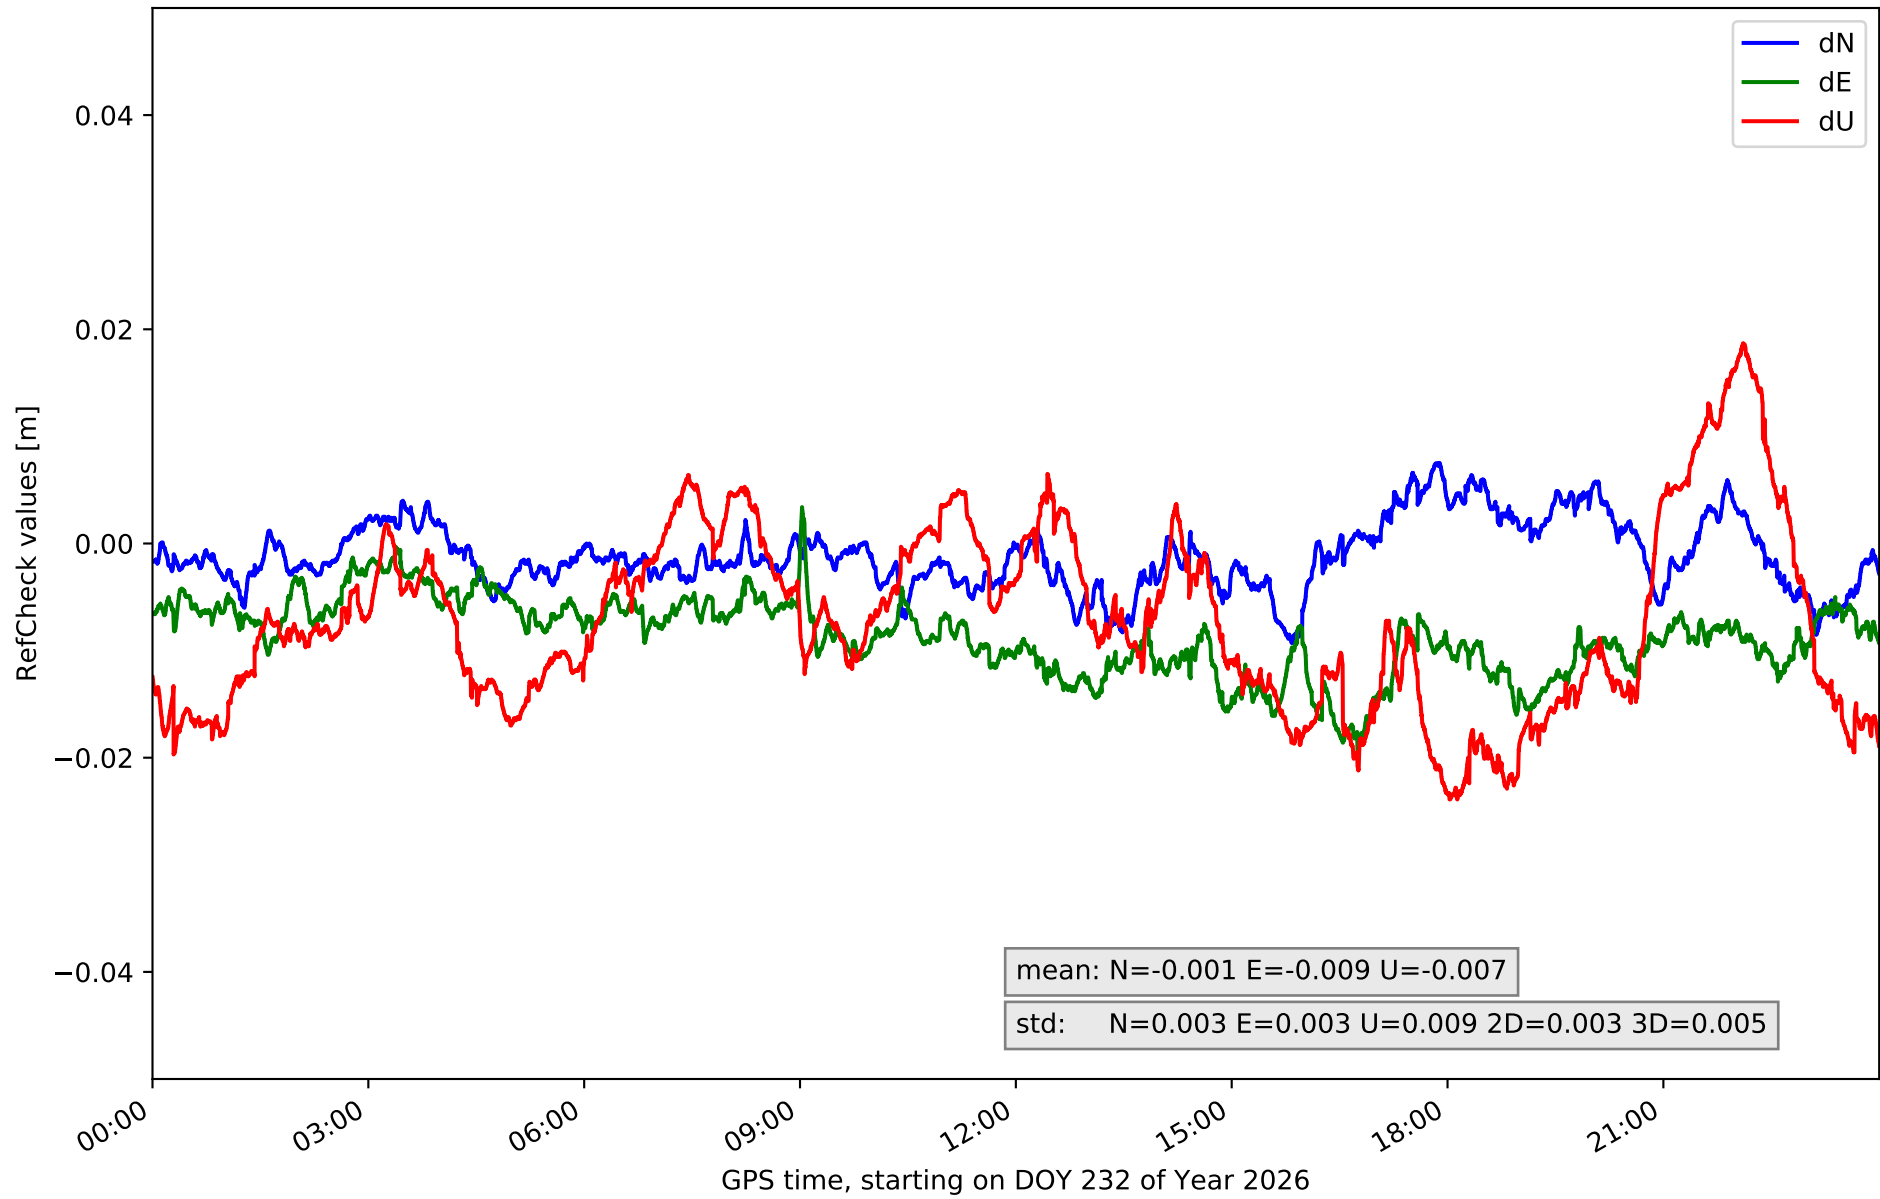

RefCheck for station TN09 in network NT32

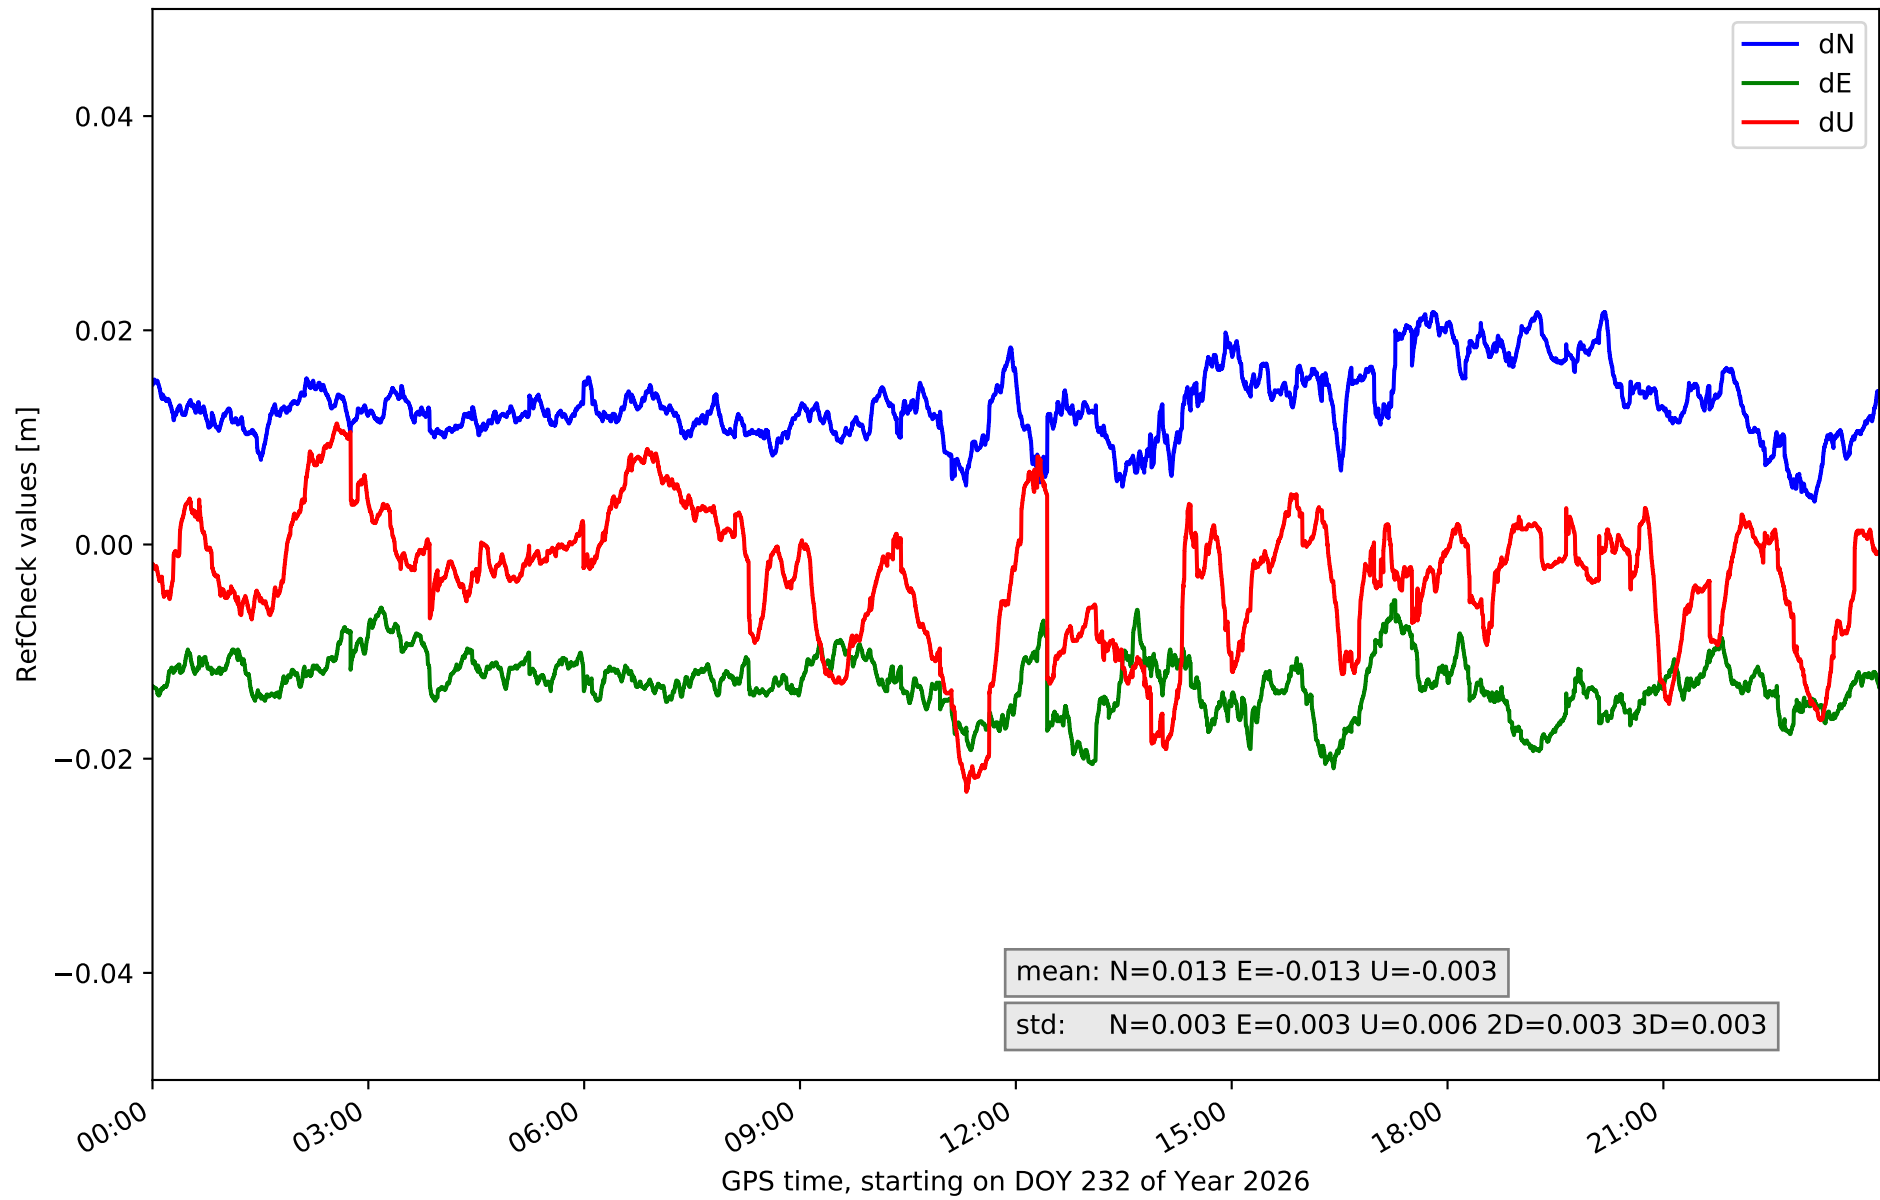

RefCheck for station TE11 in network NT32

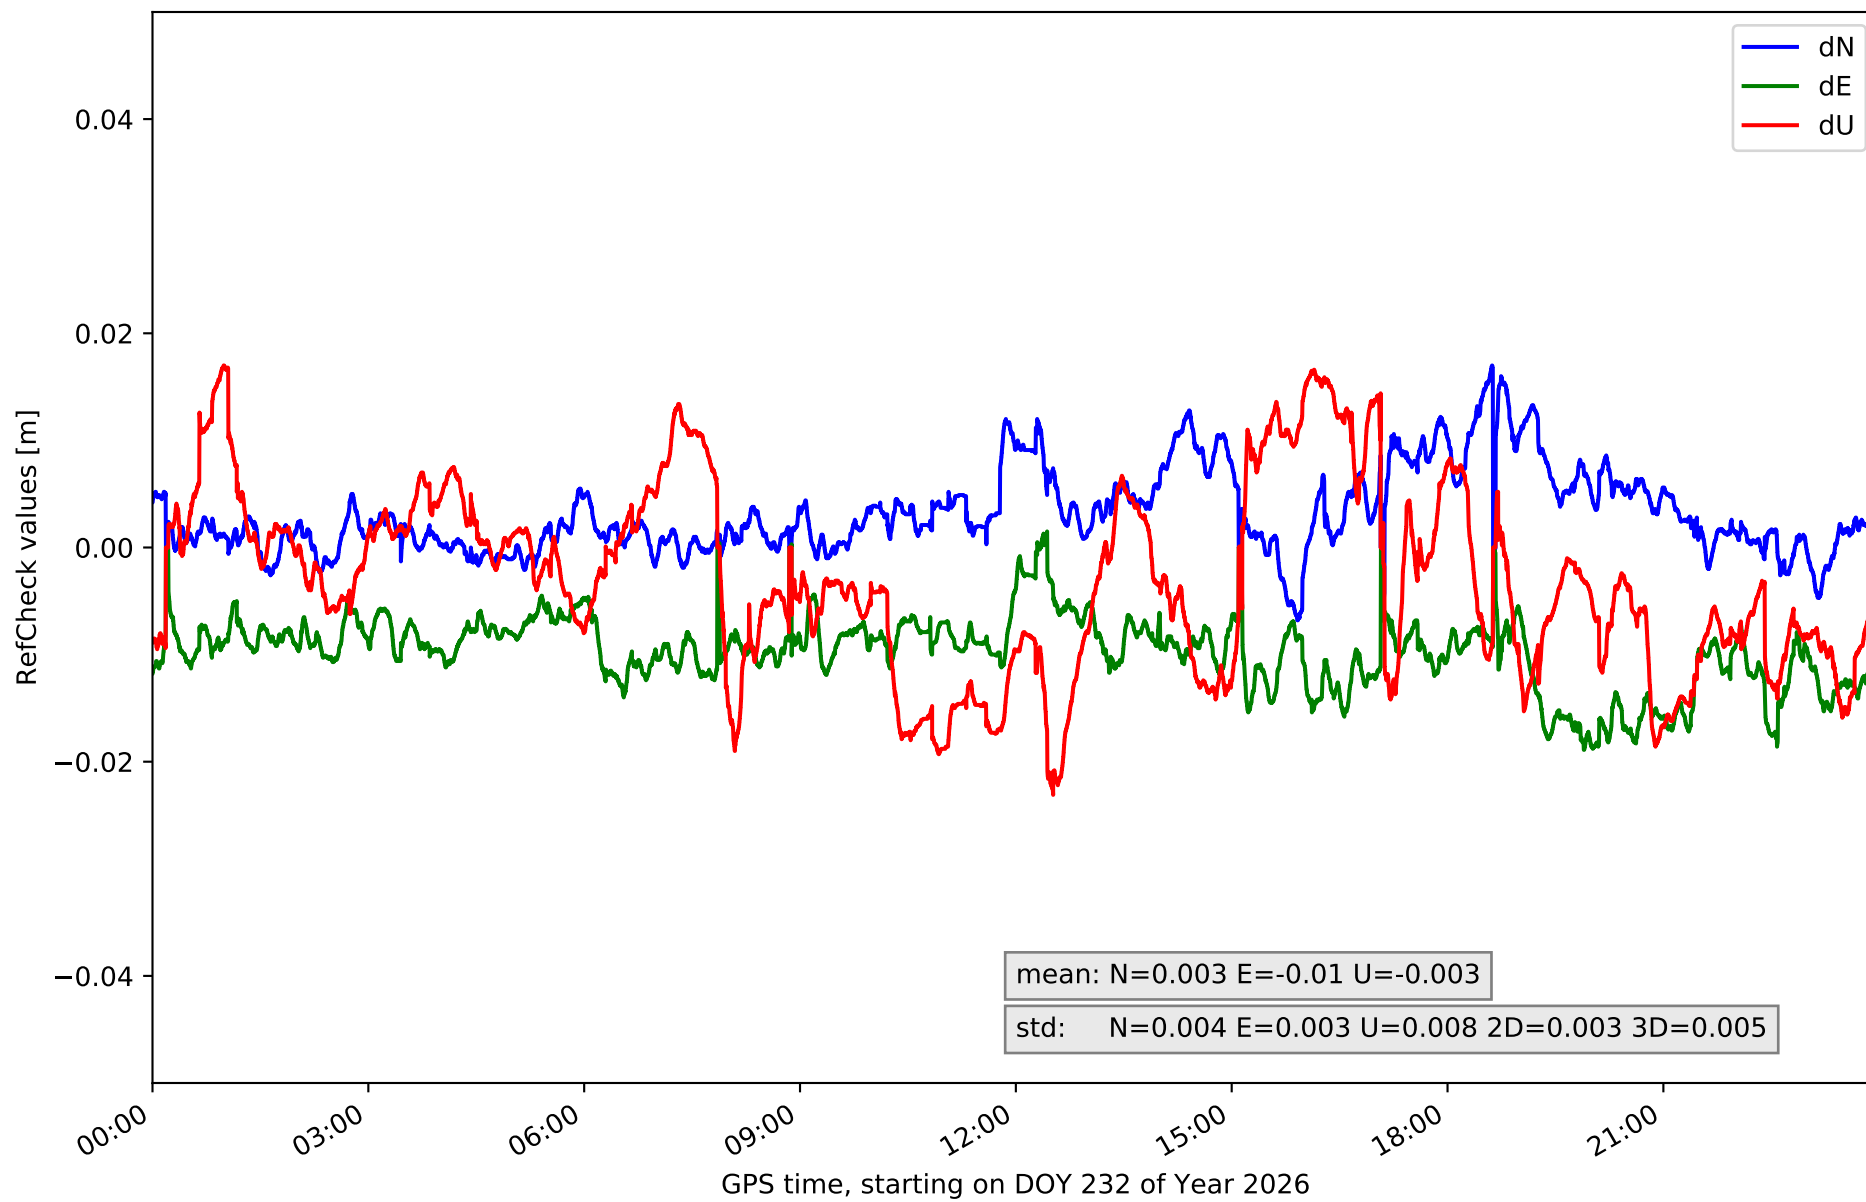

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.006	0.018	0.004	0.009	0.024	0.003	-0.022	0.02	0.007	0.002	0.003	75236	100.0	43706	58.1
EH02	-0.004	0.029	0.005	-0.004	0.03	0.004	-0.029	0.033	0.01	0.005	0.005	73436	97.6	69605	92.5
GOM1	-0.017	0.014	0.006	-0.027	0.007	0.005	-0.035	0.015	0.009	0.005	0.007	53462	71.1	33289	44.2
GOME	-0.006	0.016	0.005	-0.009	0.02	0.004	-0.04	0.029	0.014	0.004	0.008	17197	22.9	17168	22.8
IZAN	-0.005	0.011	0.003	-0.02	0.009	0.003	-0.06	0.017	0.007	0.003	0.004	67279	89.4	7232	9.6
LP01	-0.021	0.004	0.004	-0.013	0.027	0.005	-0.027	0.051	0.014	0.005	0.009	68957	91.7	39744	52.8
LP03	-0.012	0.012	0.004	-0.009	0.018	0.005	-0.032	0.019	0.009	0.003	0.005	12397	16.5	1504	2.0
LPAL	-0.021	-0.0	0.003	0.0	0.019	0.002	-0.016	0.016	0.007	0.003	0.003	74849	99.5	18686	24.8
LRES	-0.0	0.026	0.004	-0.0	0.027	0.005	-0.022	0.022	0.009	0.005	0.005	72105	95.8	54701	72.7
TN01	-0.032	0.022	0.007	-0.036	0.025	0.007	-0.068	0.06	0.016	0.006	0.01	61332	81.5	34559	45.9
TN02	-0.012	0.011	0.004	-0.019	-0.001	0.003	-0.008	0.03	0.007	0.003	0.005	39013	51.9	11957	15.9
TN03	-0.004	0.023	0.004	-0.027	0.007	0.006	-0.025	0.037	0.013	0.005	0.007	26258	34.9	16574	22.0
TN06	-0.009	0.007	0.003	-0.02	0.003	0.003	-0.024	0.019	0.009	0.003	0.005	28217	37.5	10561	14.0
TN09	0.004	0.022	0.003	-0.021	-0.005	0.003	-0.023	0.011	0.006	0.003	0.003	75097	99.8	30394	40.4
TE11	-0.007	0.017	0.004	-0.019	0.002	0.003	-0.023	0.017	0.008	0.003	0.005	40278	53.5	6959	9.2
Mean	-0.01	0.015	0.004	-0.014	0.014	0.004	-0.03	0.026	0.01	0.004	0.006	52340.9	69.6	26442.6	35.1
Min/Max	-0.032	0.029	0.007	-0.036	0.03	0.007	-0.068	0.06	0.016	0.006	0.01	75236	100.0	69605	92.5

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	94.5	95.0	93.3	94.7	94.2
considering satellites with dual-frequency fixed	91.7	92.0	89.1	92.5	92.1
considering all signals separately	91.9	92.1	89.1	93.0	91.9