

summary for network N32T

timeperiod chosen: from 2026-08-25-00:00:00 until 2026-08-25-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.4 seconds


average fixing percentage with threshold set to 0.3: 95.0 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

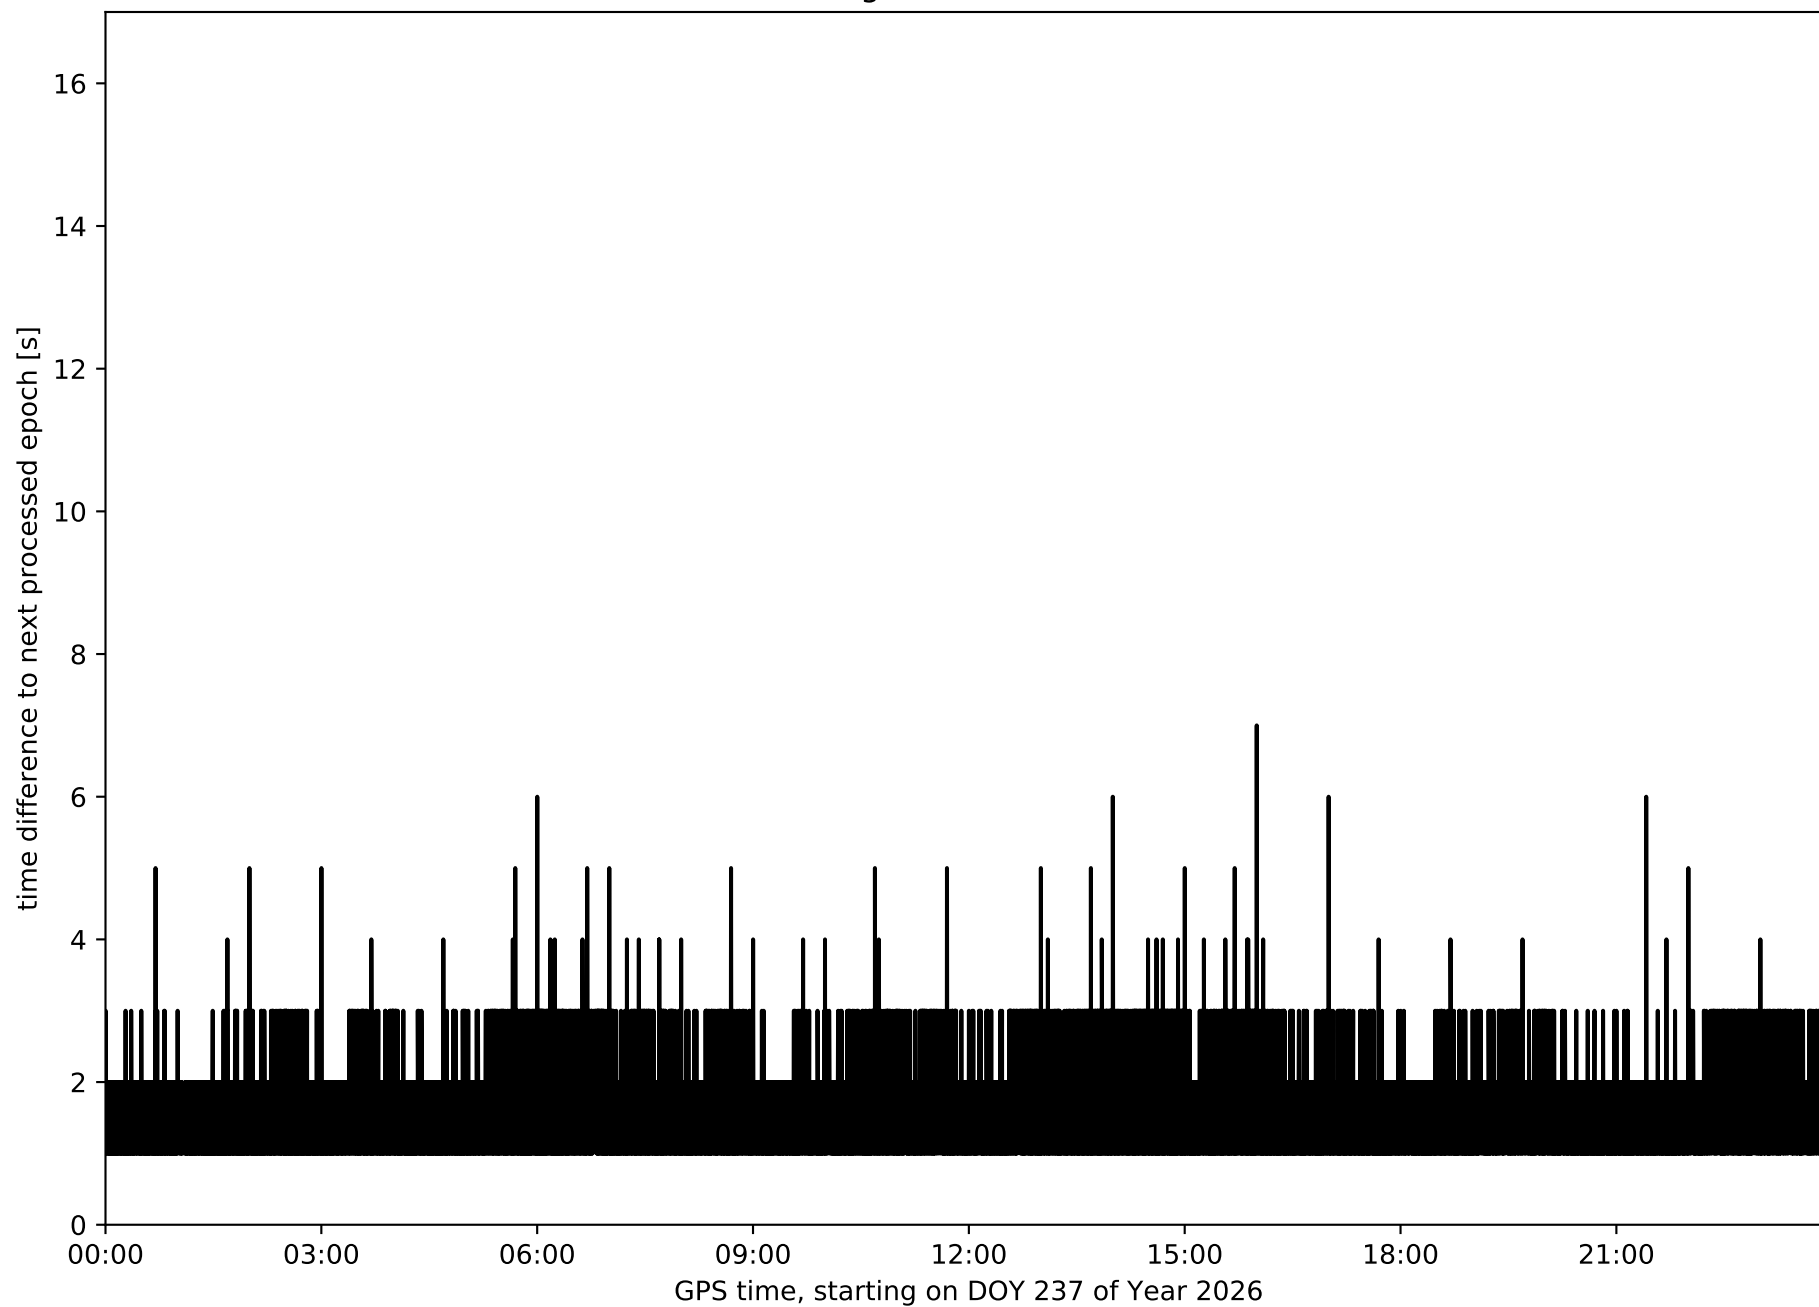


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

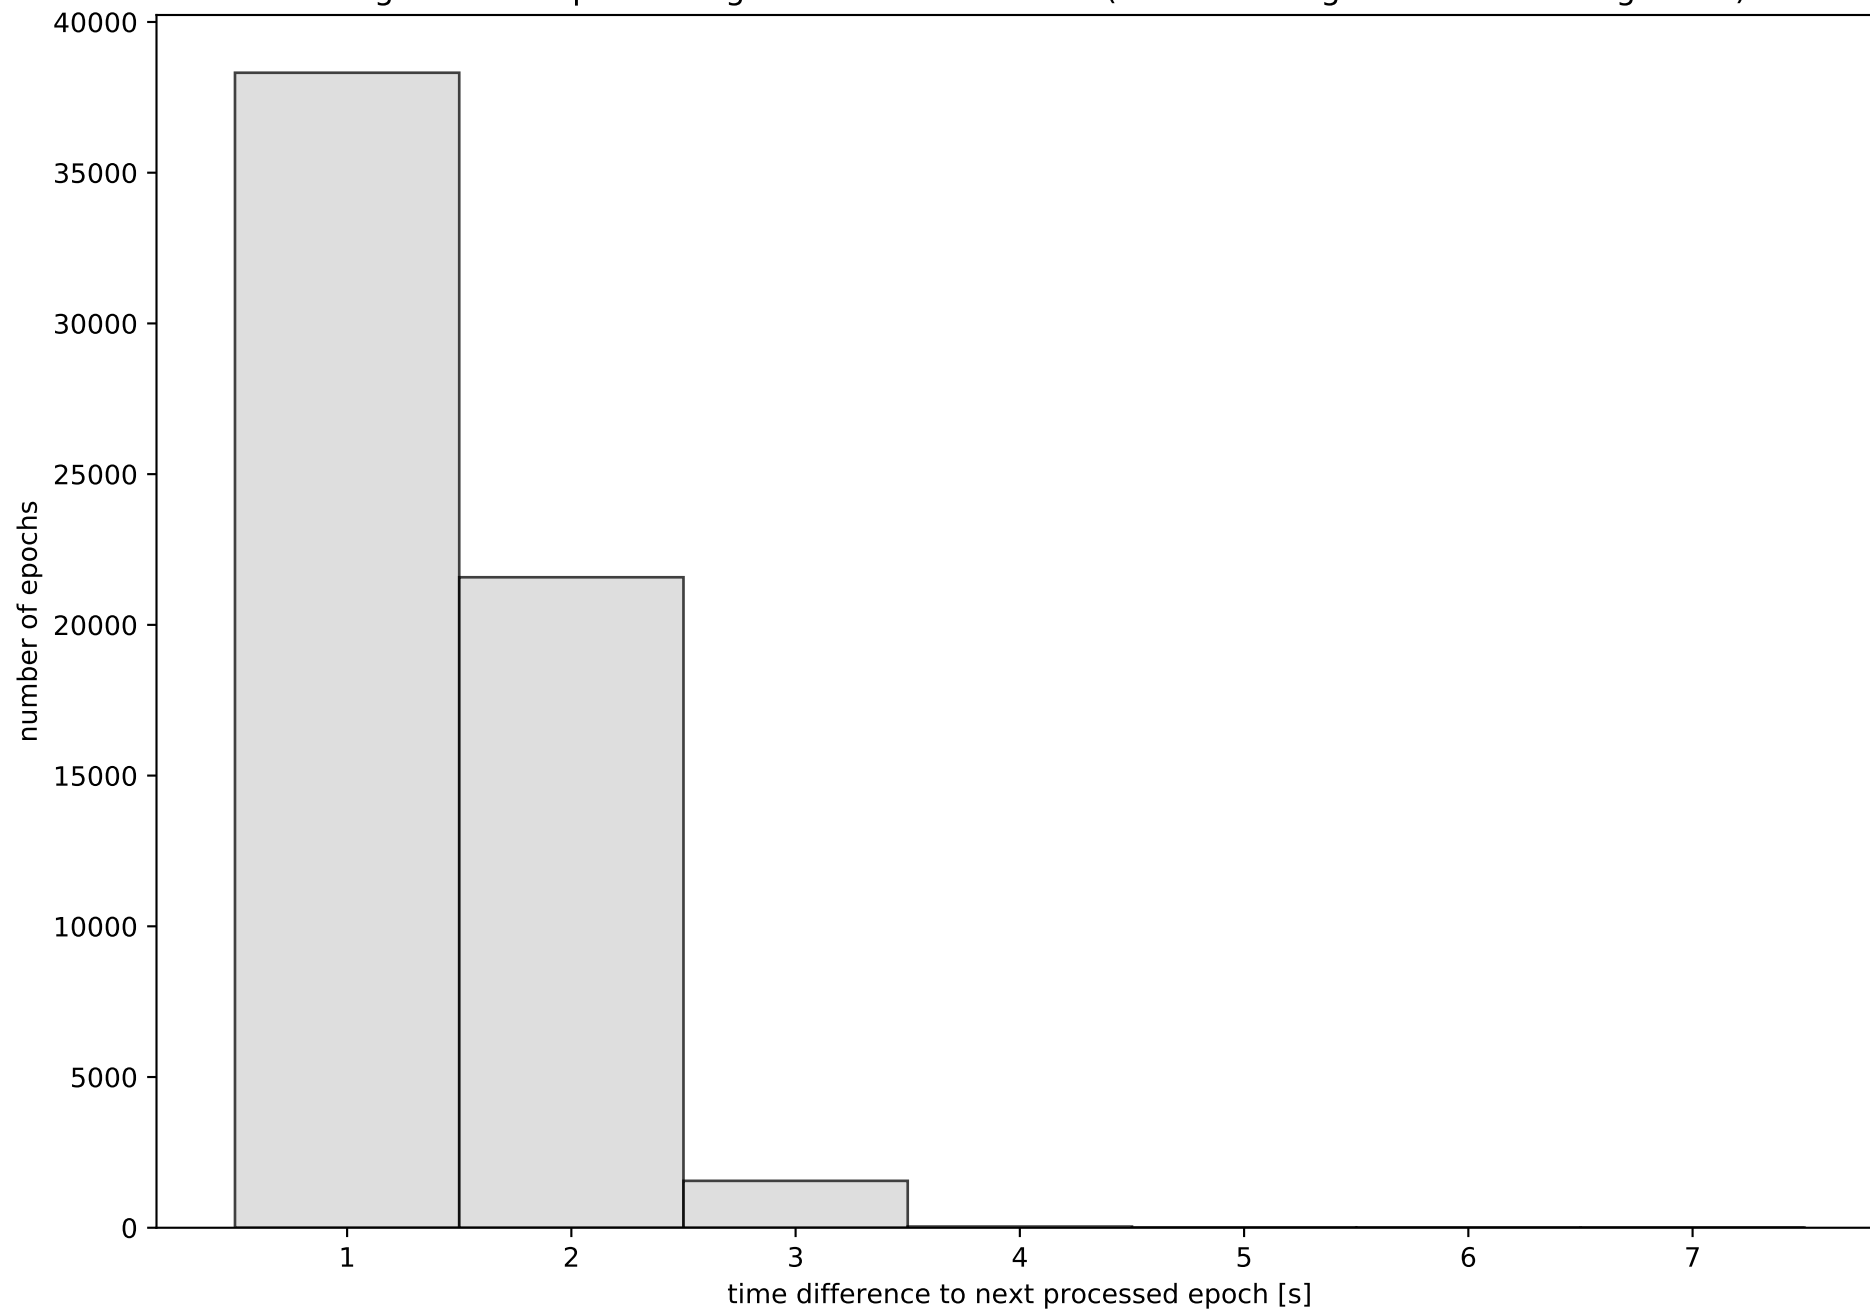


Network N32T with threshold set to 0.3

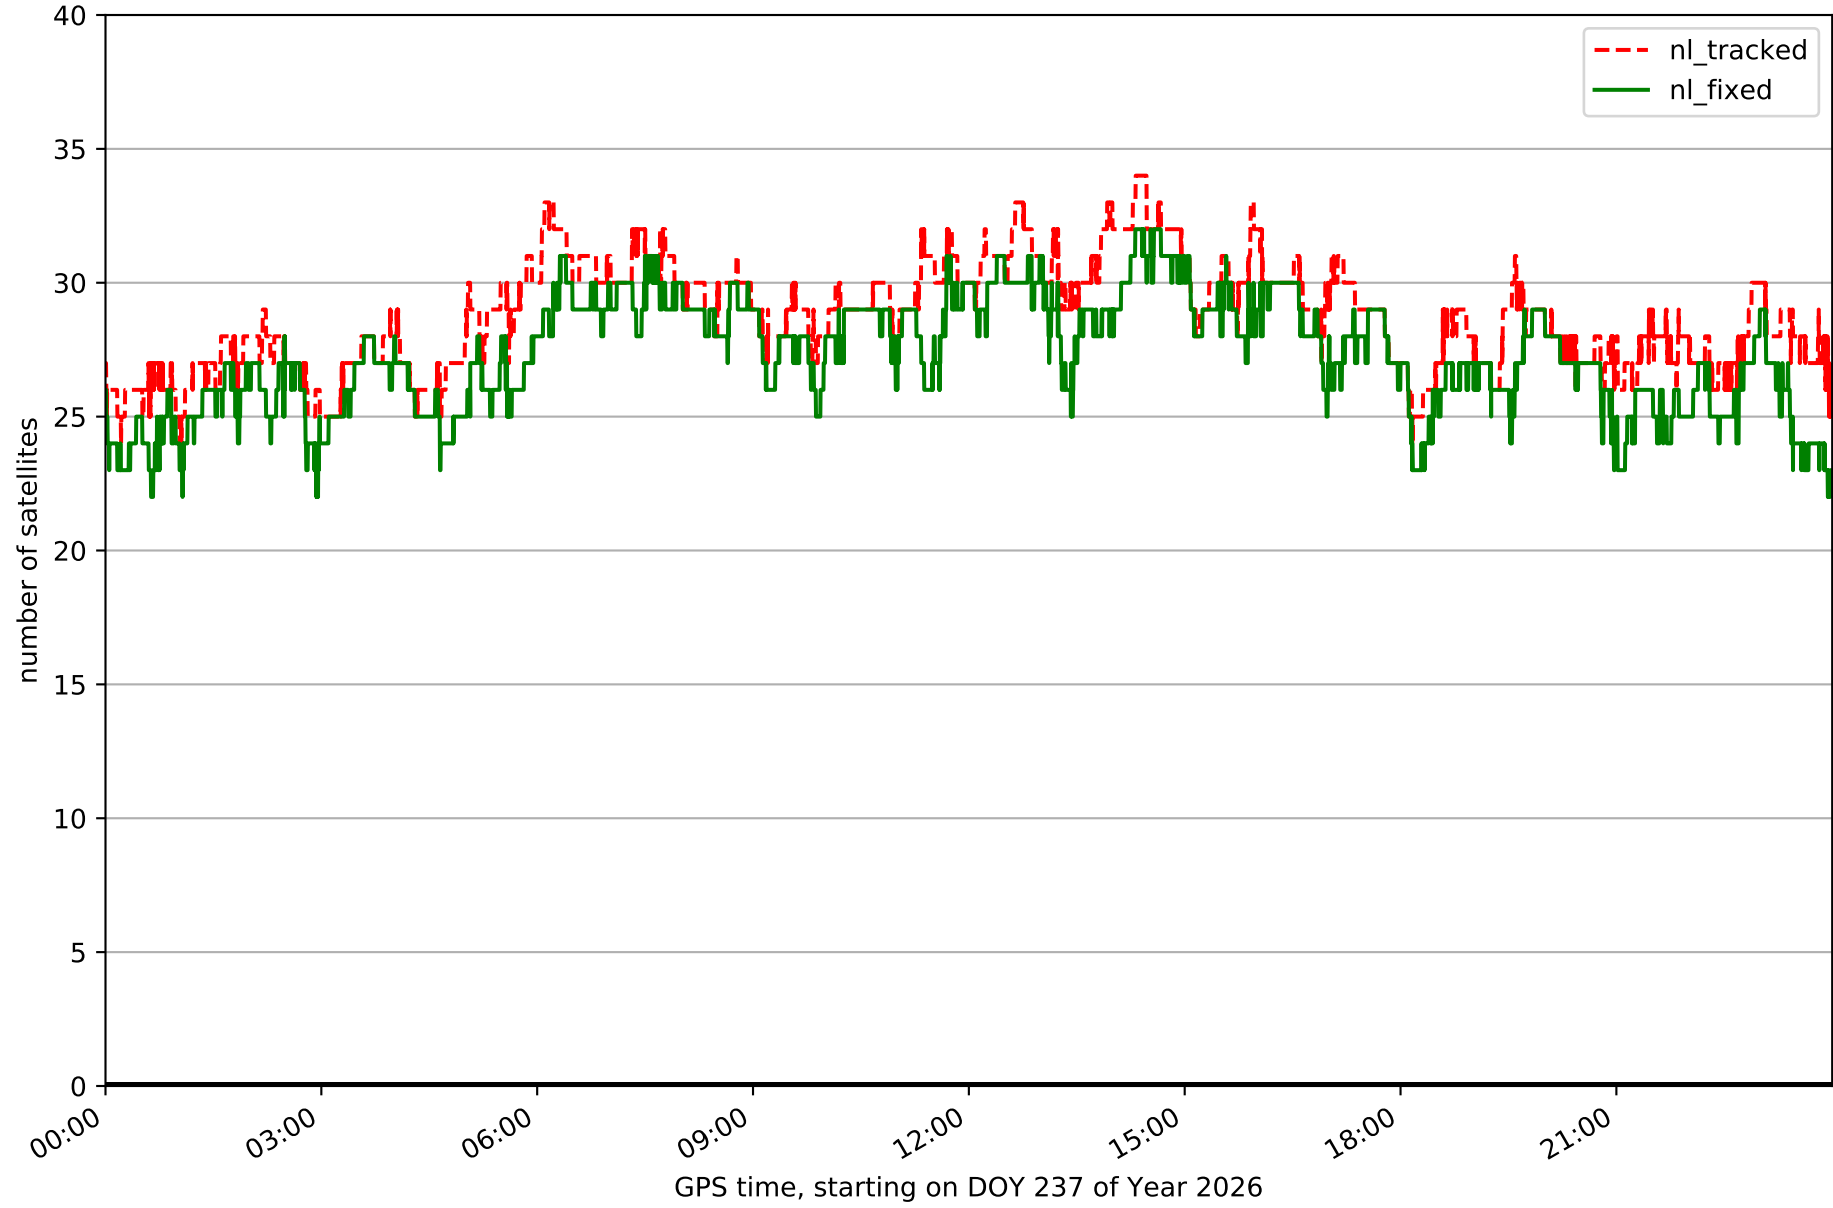


Fixing percentage of satellites in network N32T with threshold set to 0.3

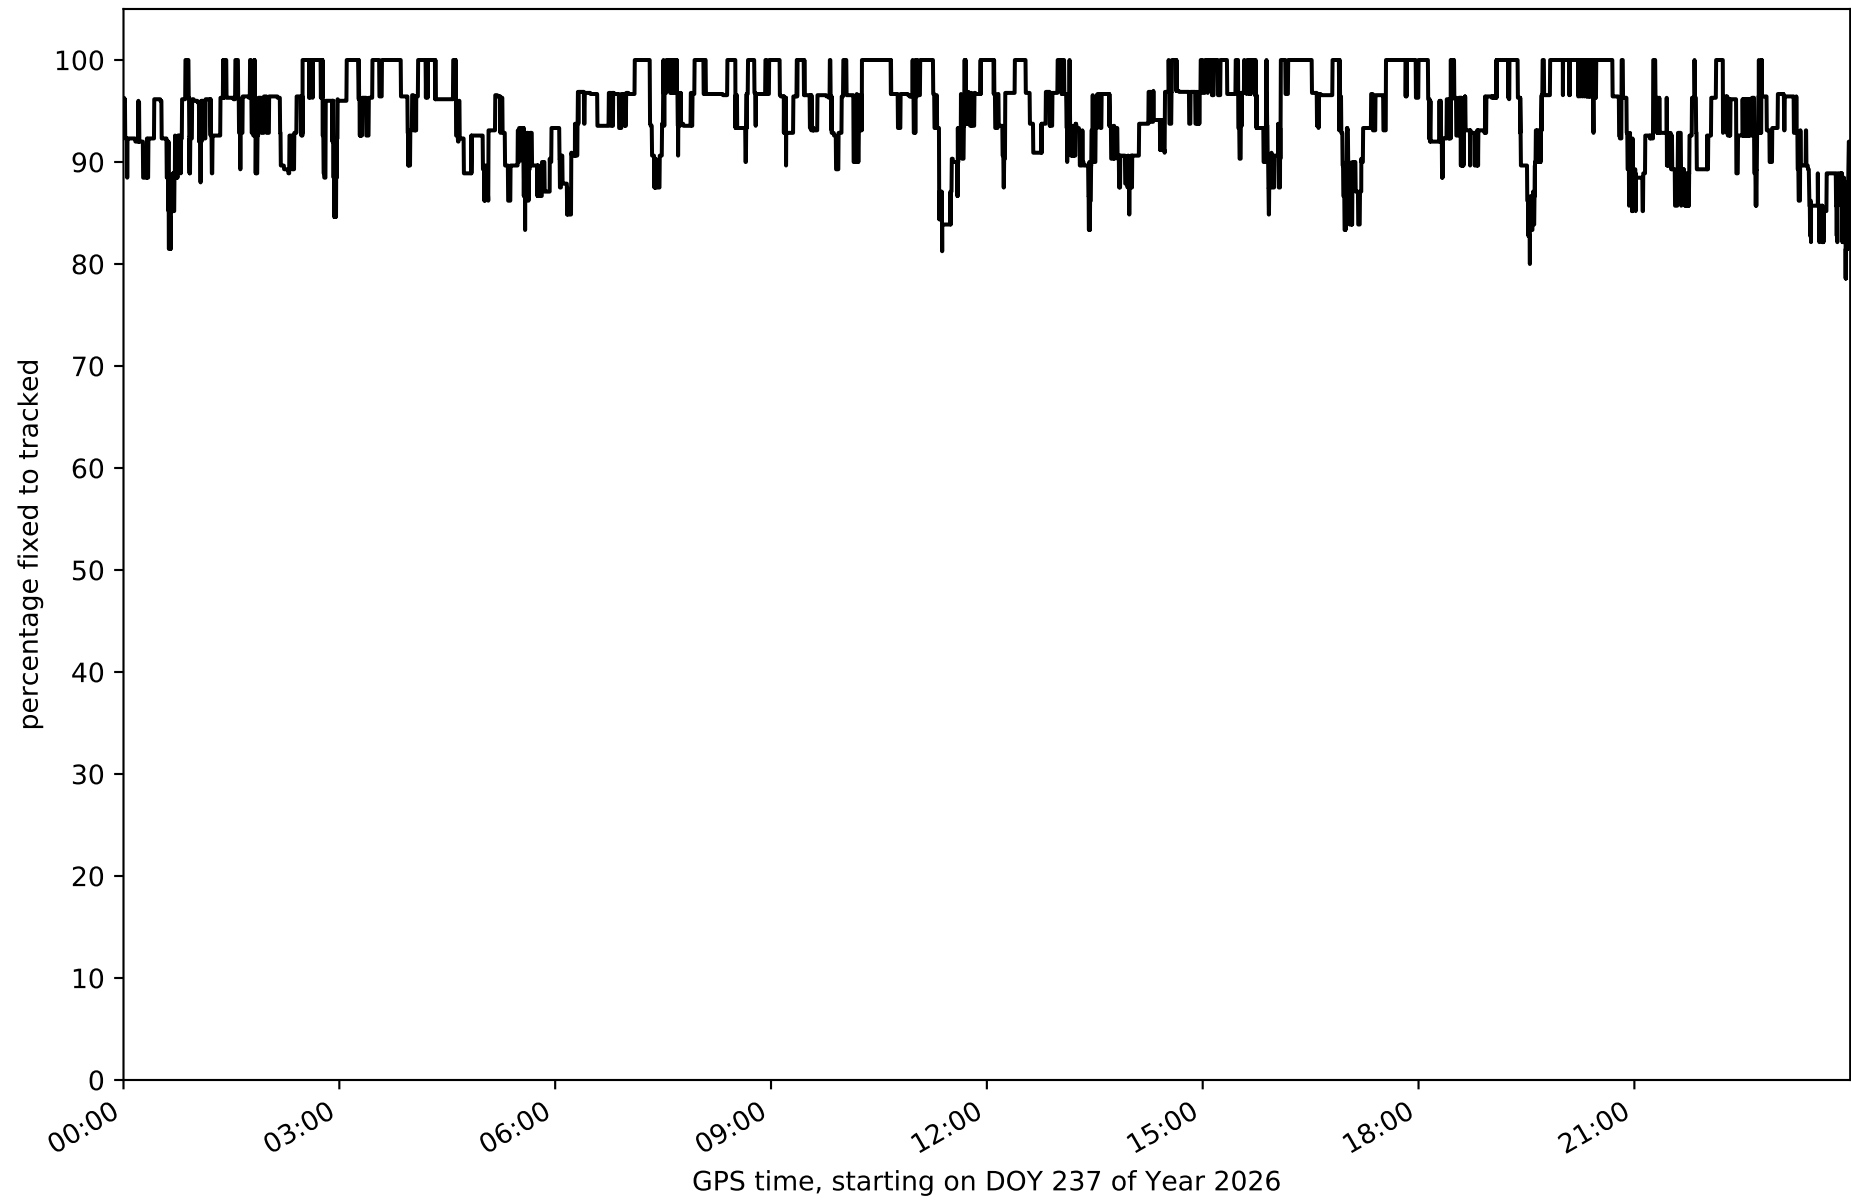


Network N32T - only GPS with threshold set to 0.3

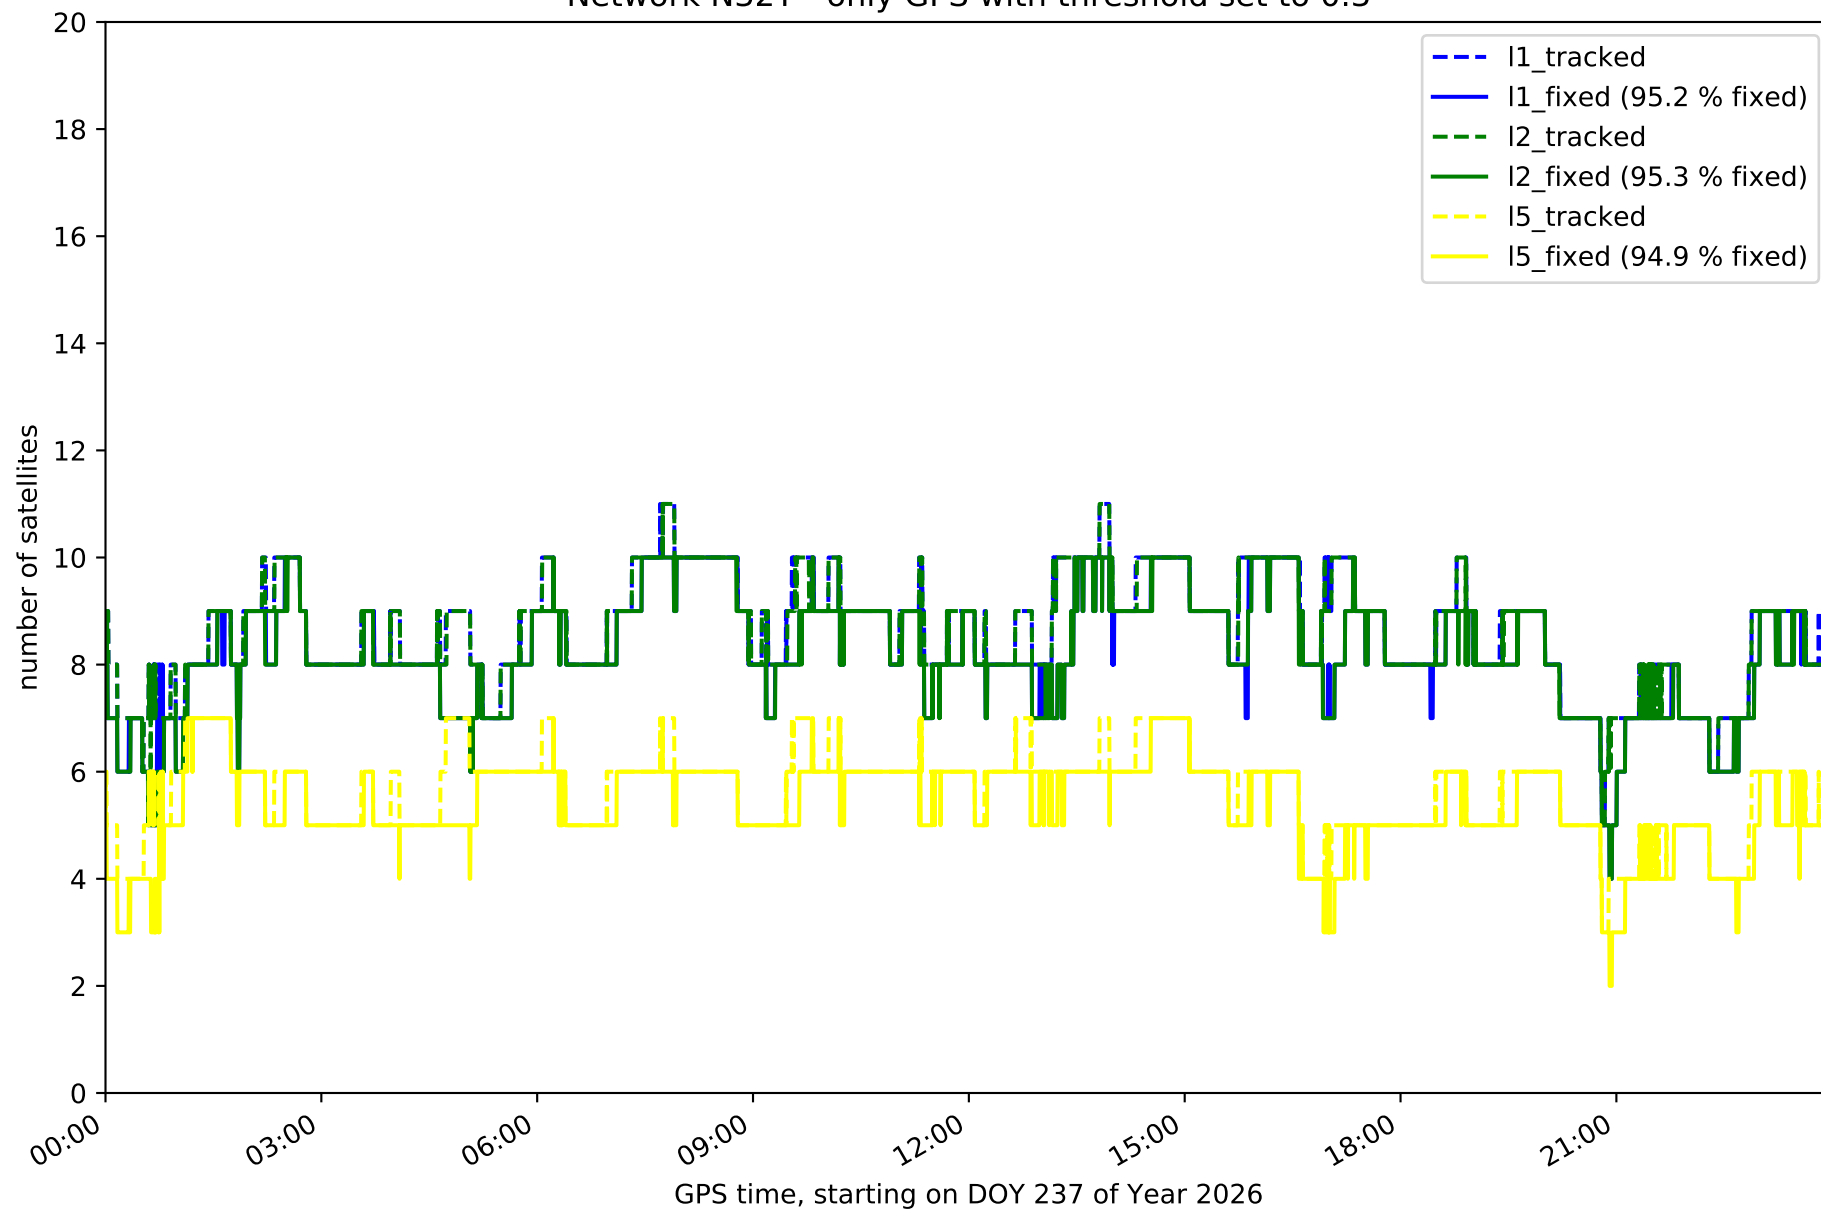


Network N32T - only GLONASS with threshold set to 0.3

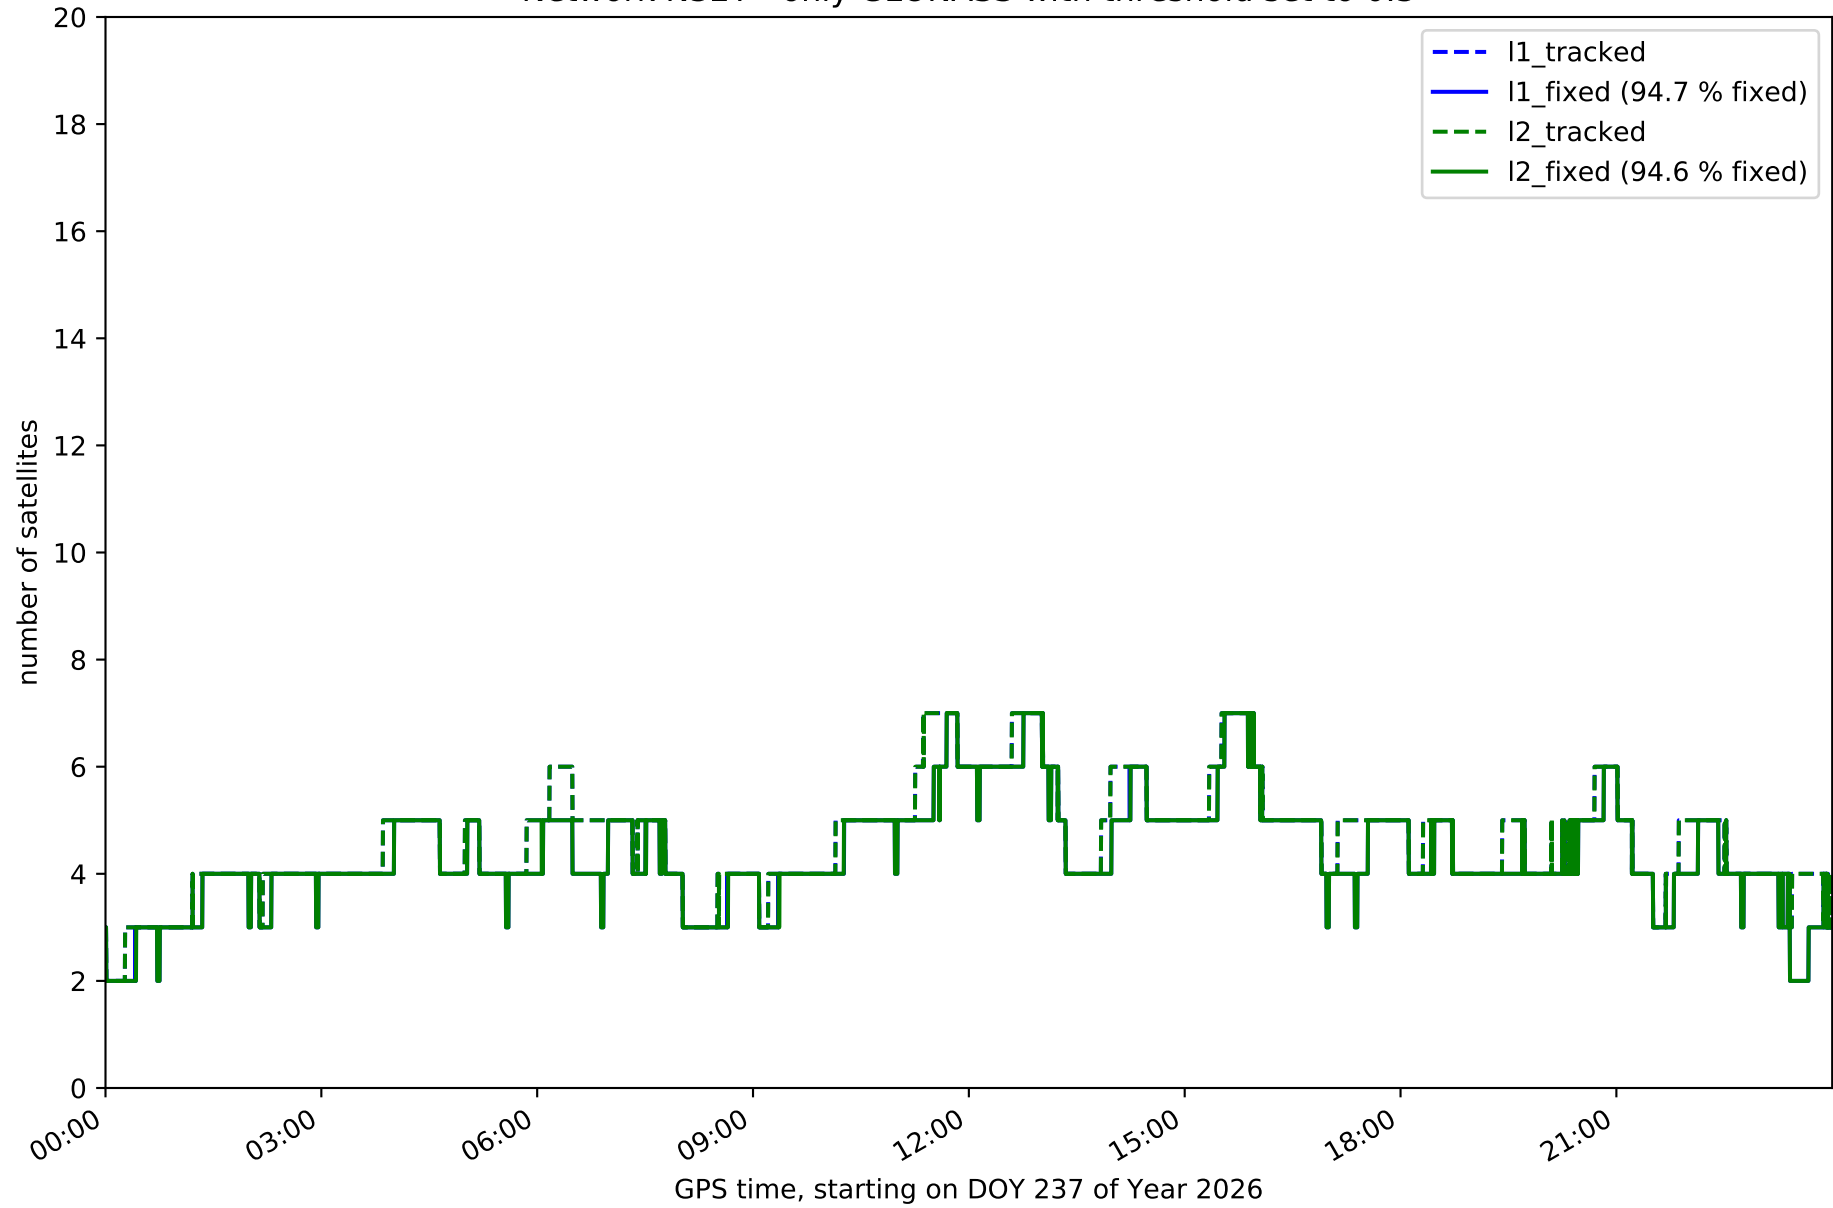


Network N32T - only BDS with threshold set to 0.3

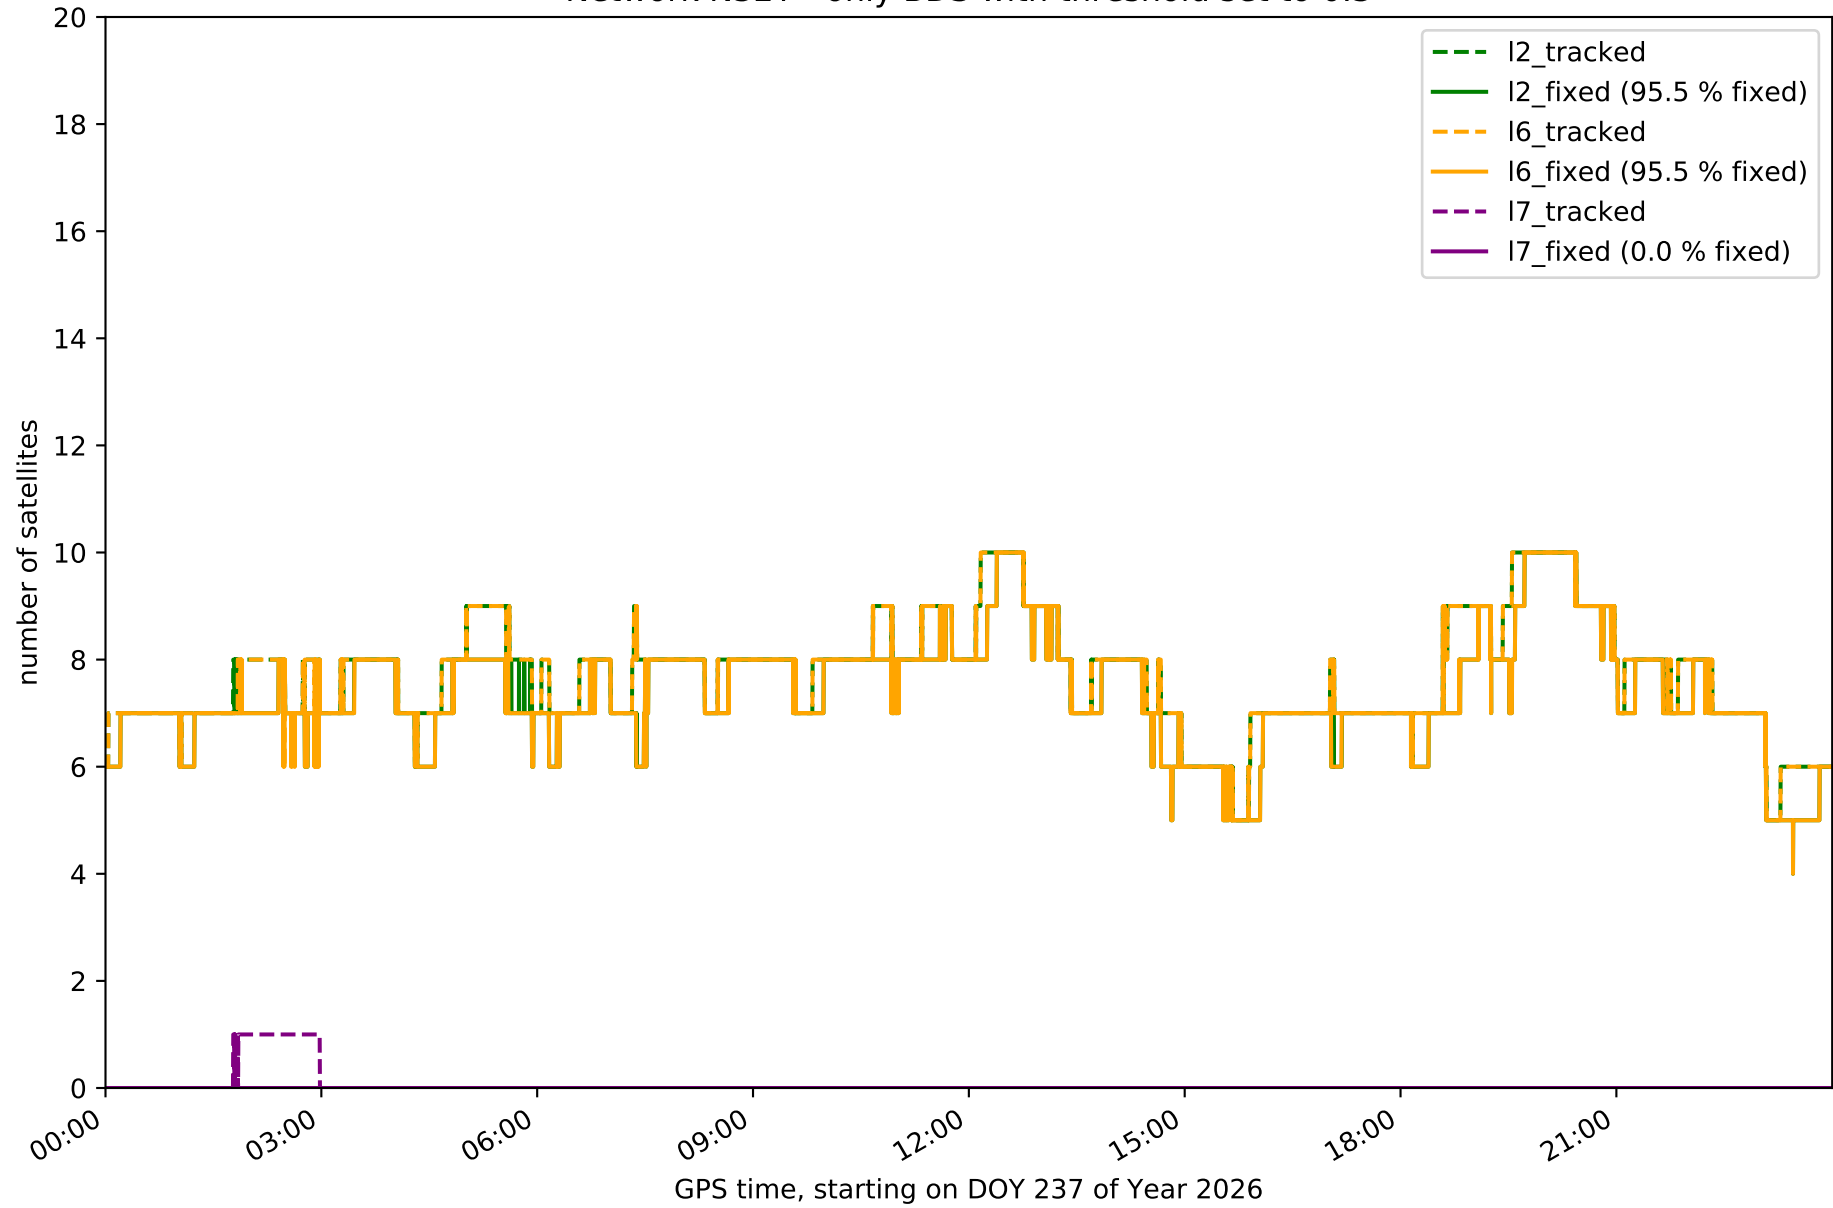


Network N32T - only Galileo with threshold set to 0.3

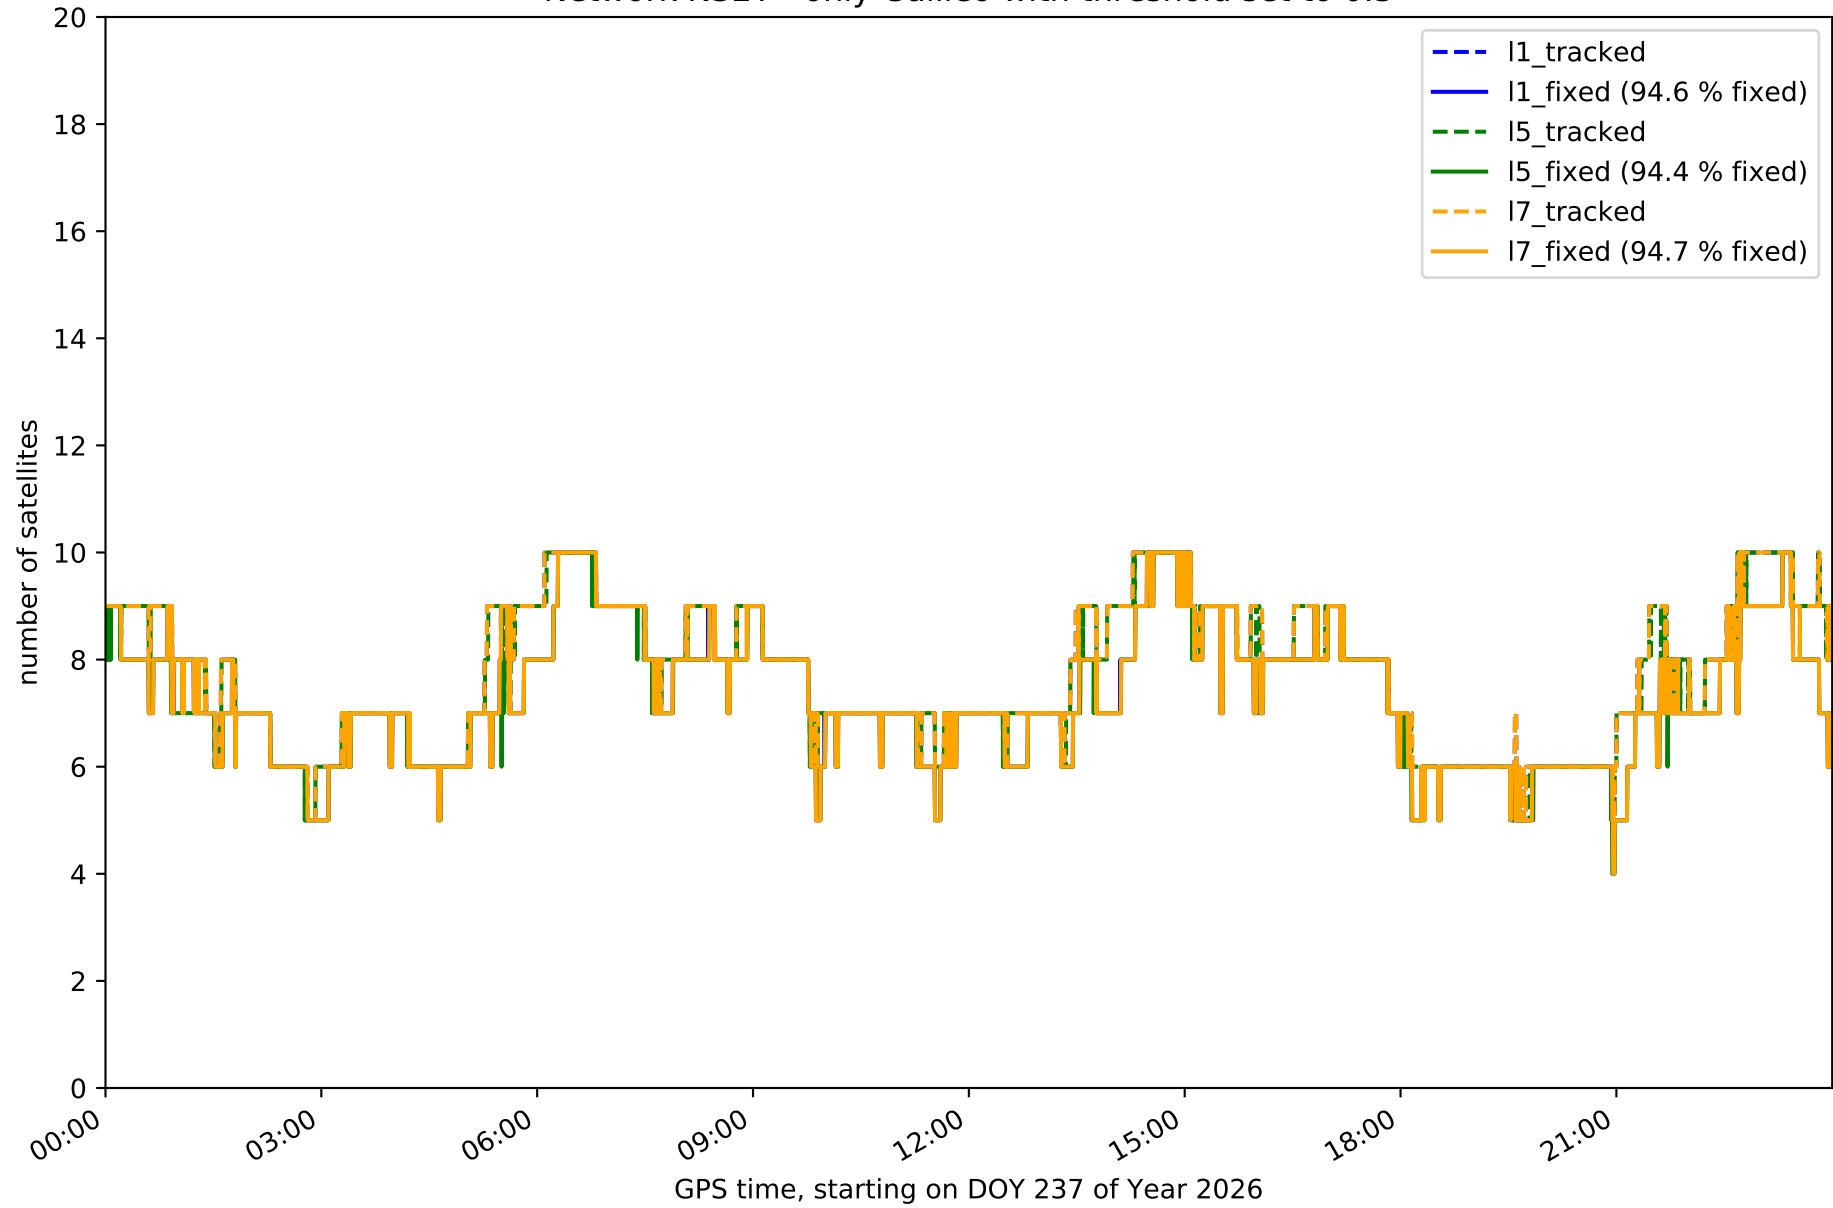


Station EH01 in network N32T

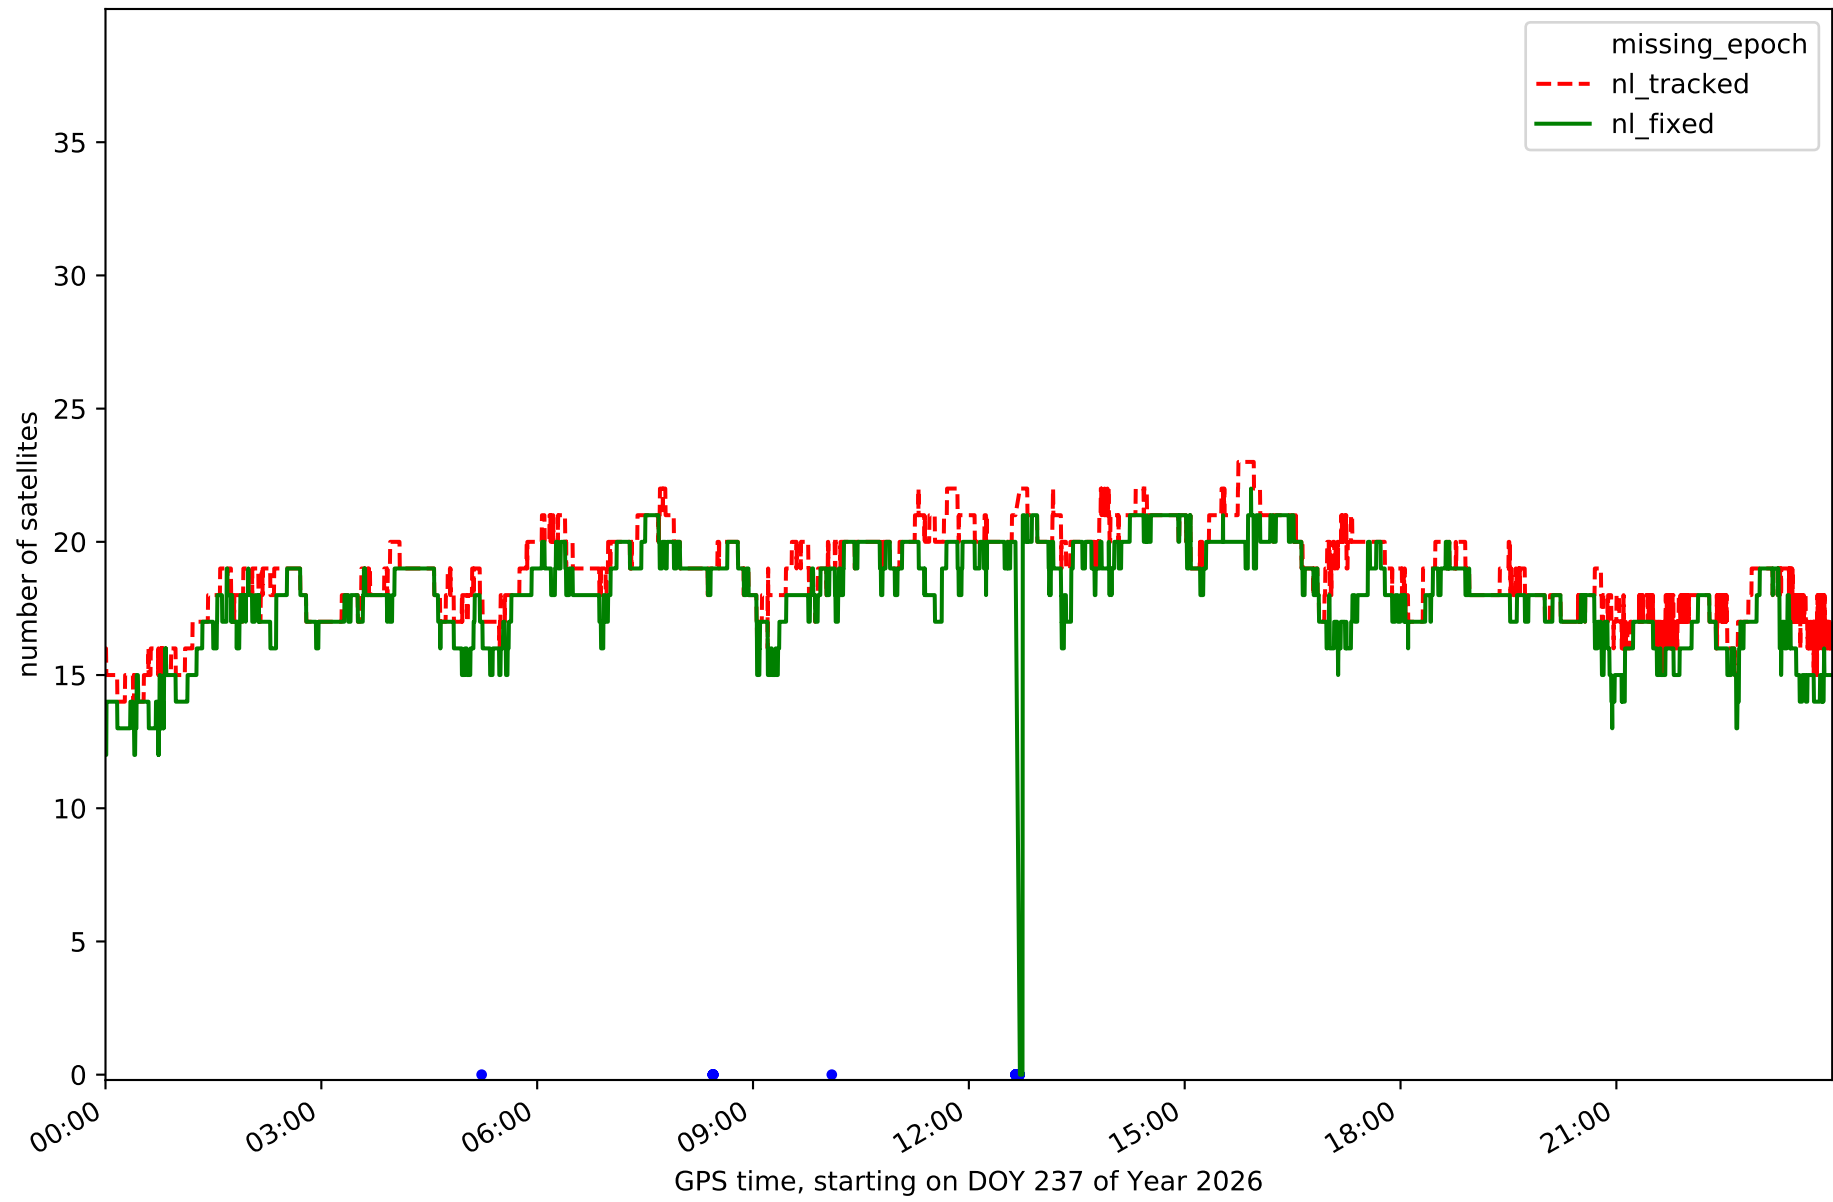


Station EH02 in network N32T

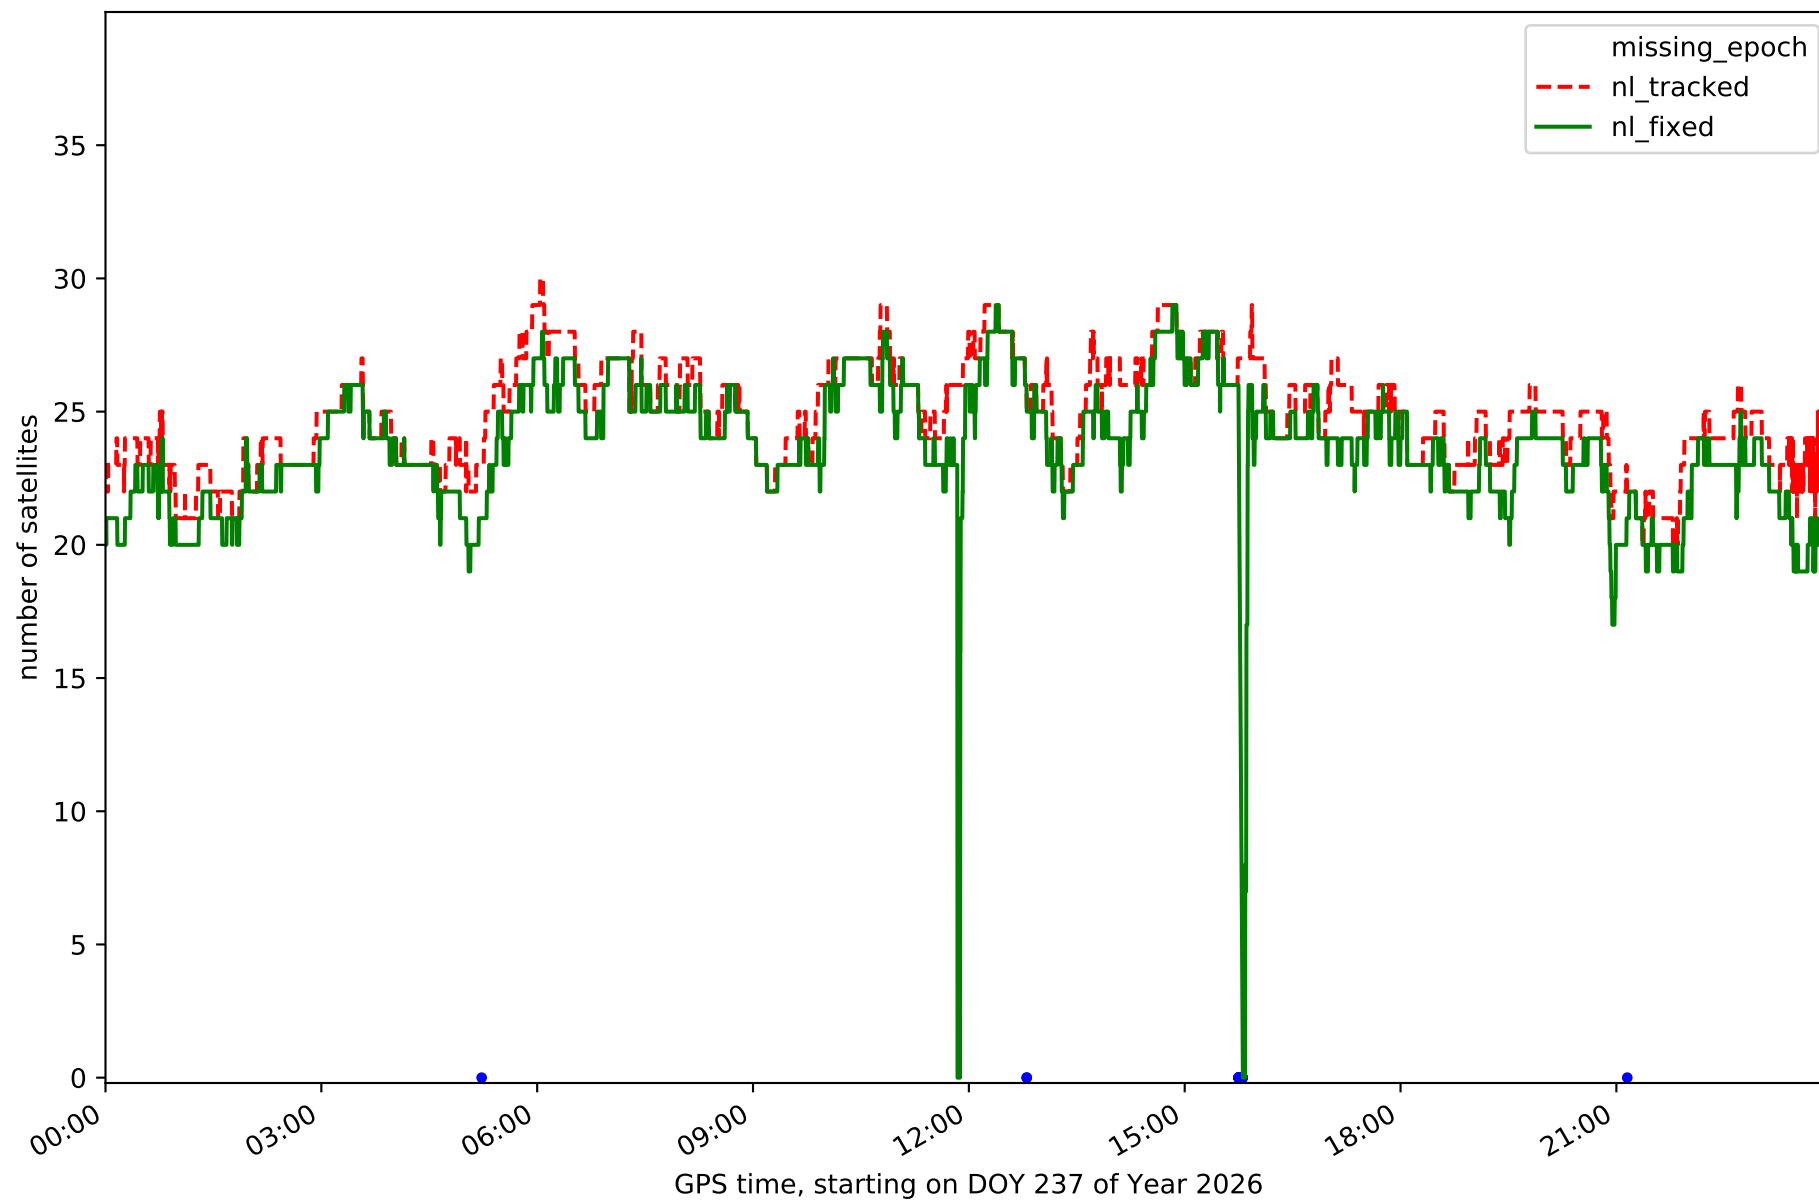


Station GOM1 in network N32T

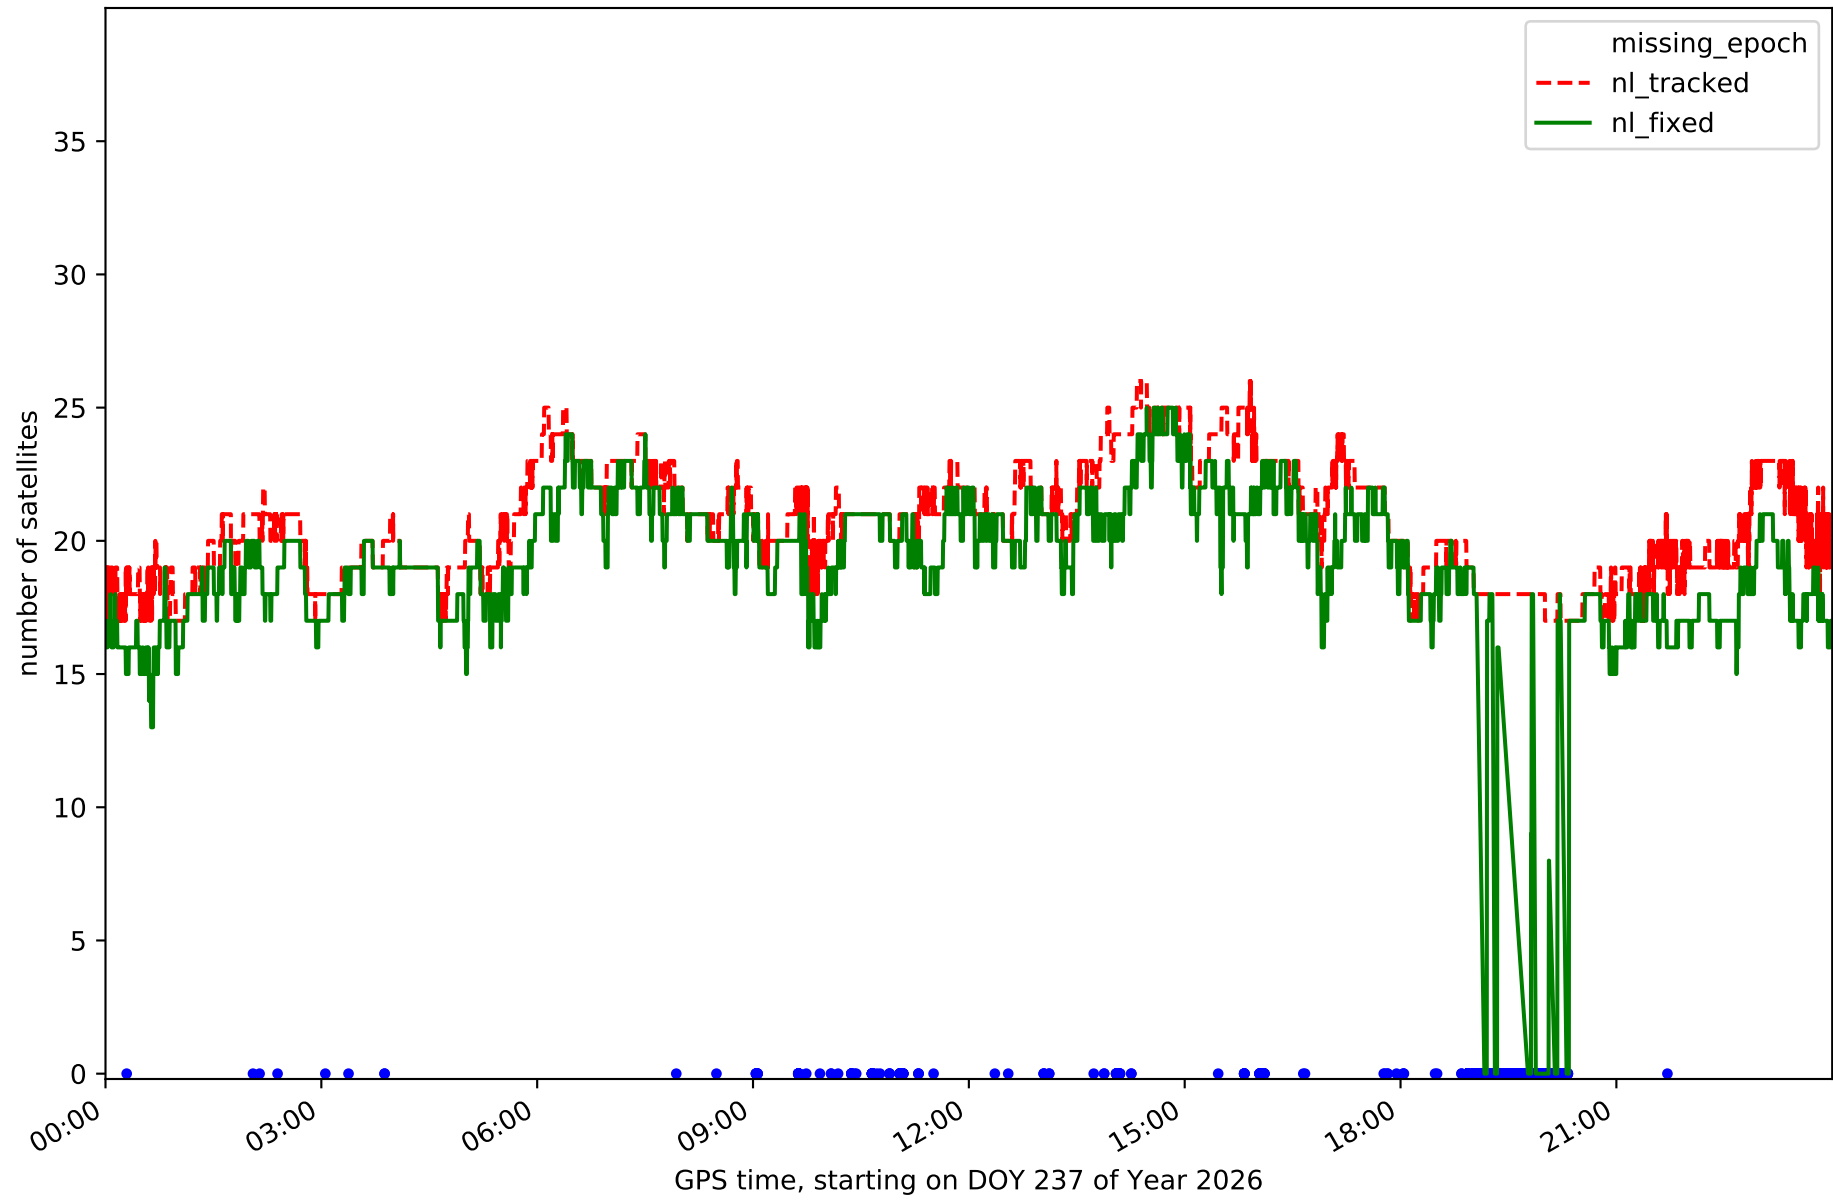


Station GOME in network N32T

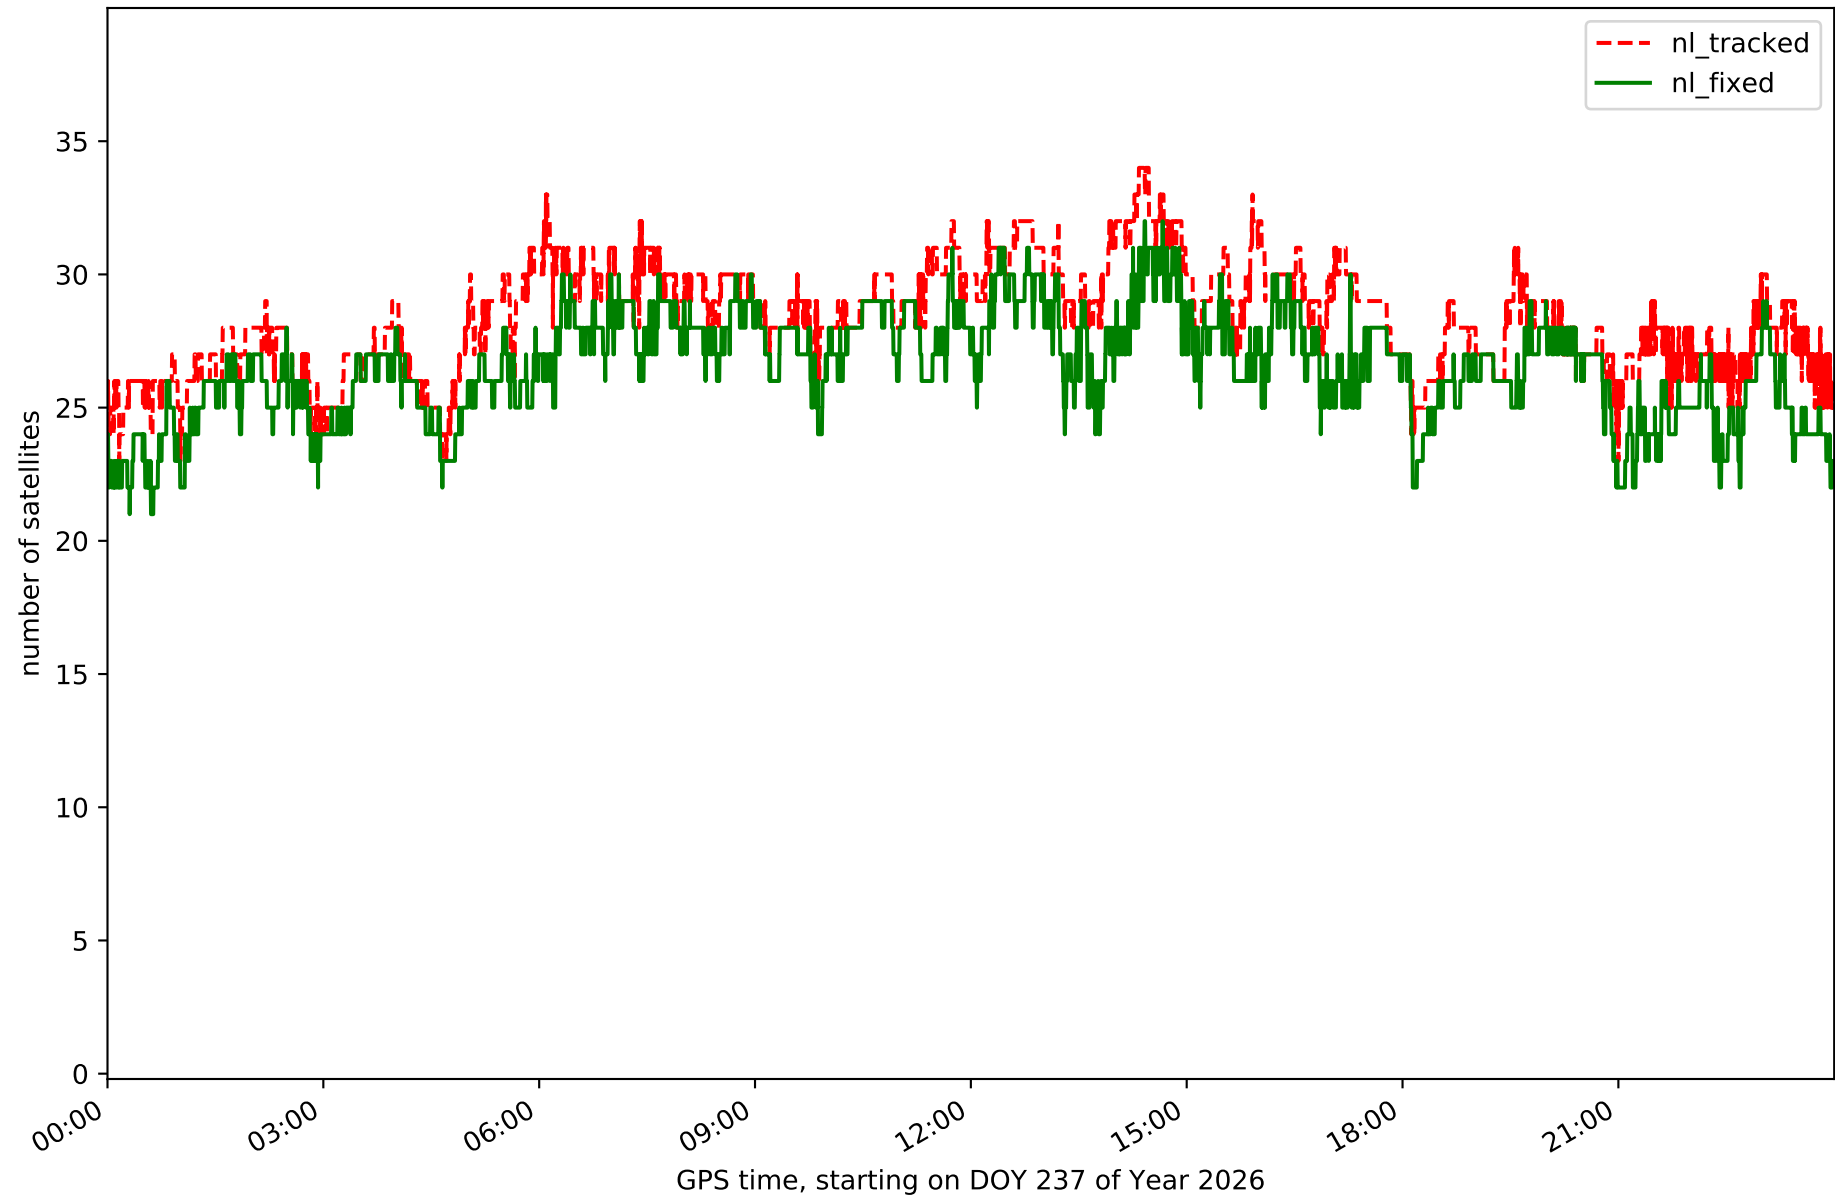


Station IZAN in network N32T

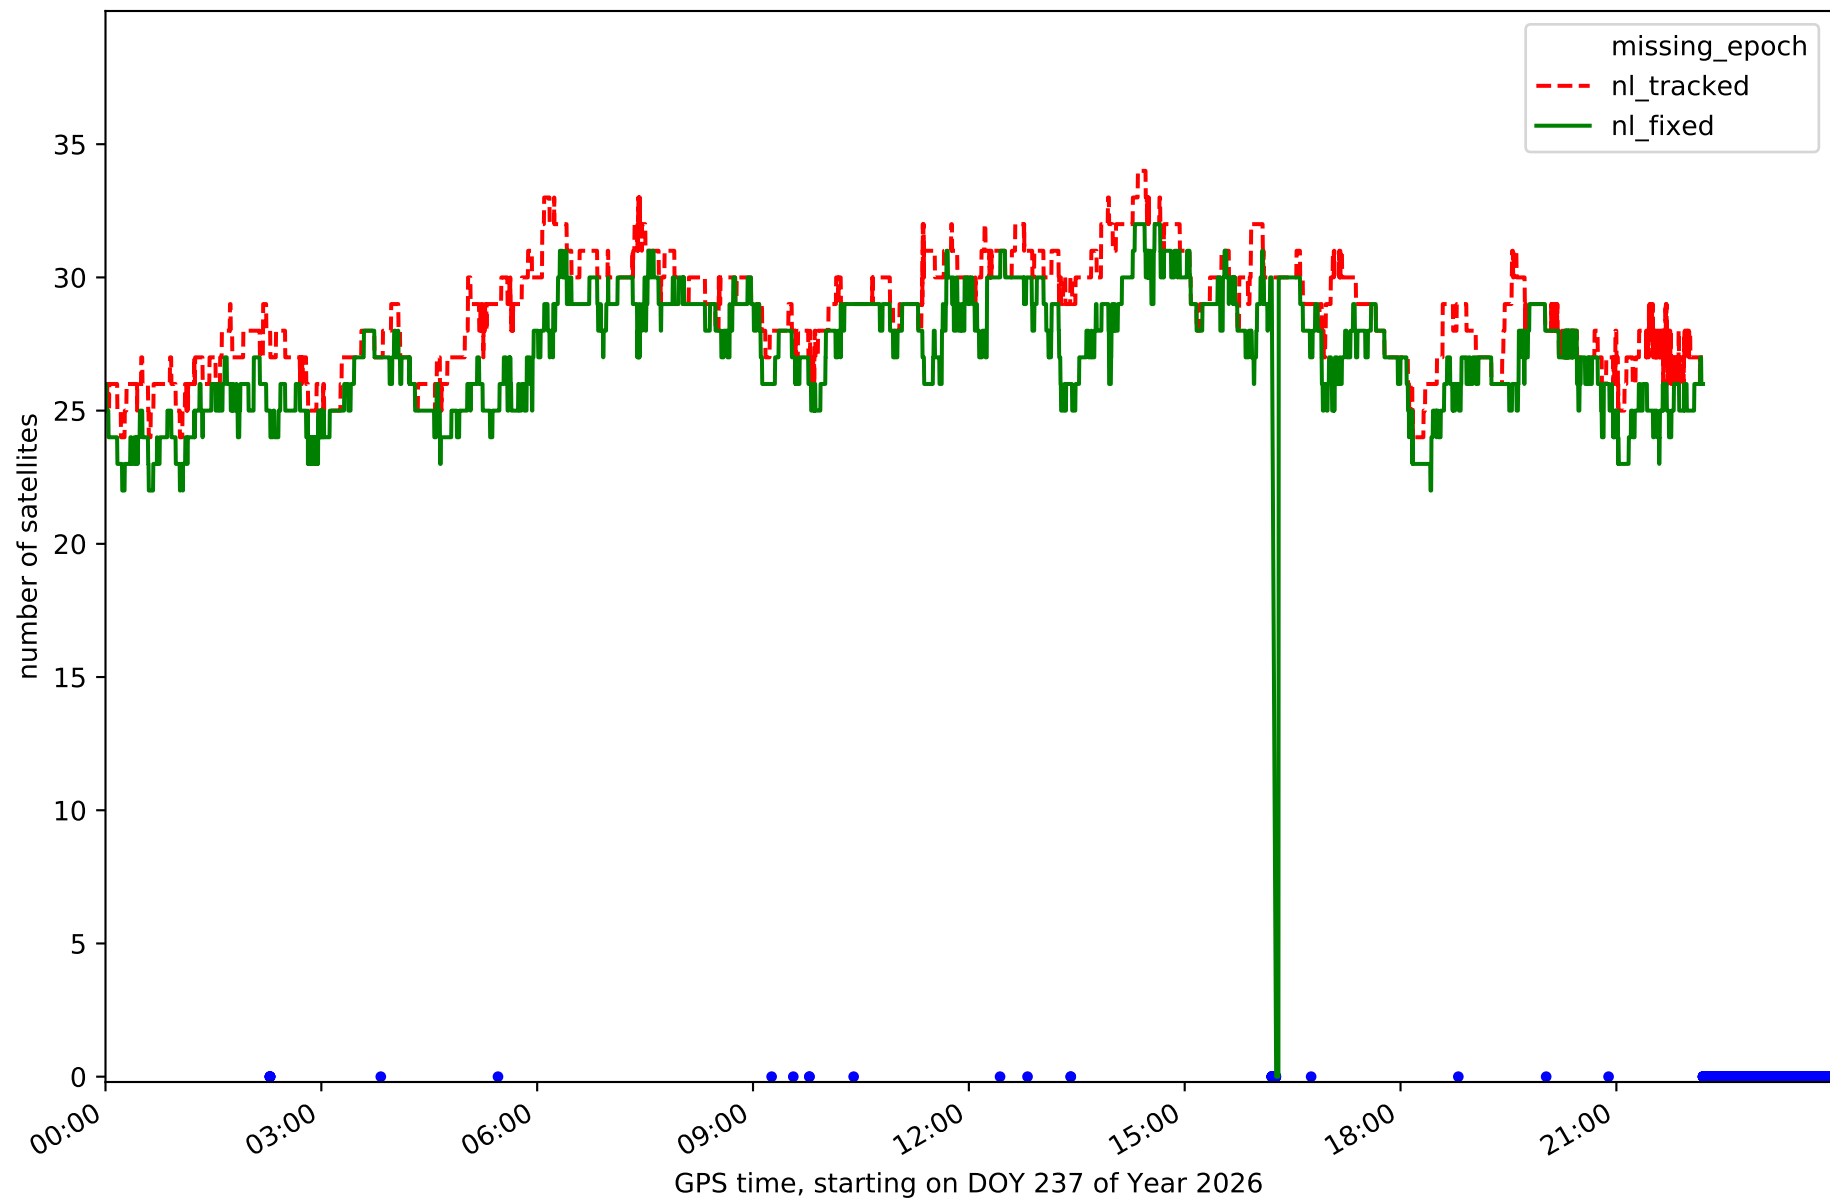


Station LP01 in network N32T

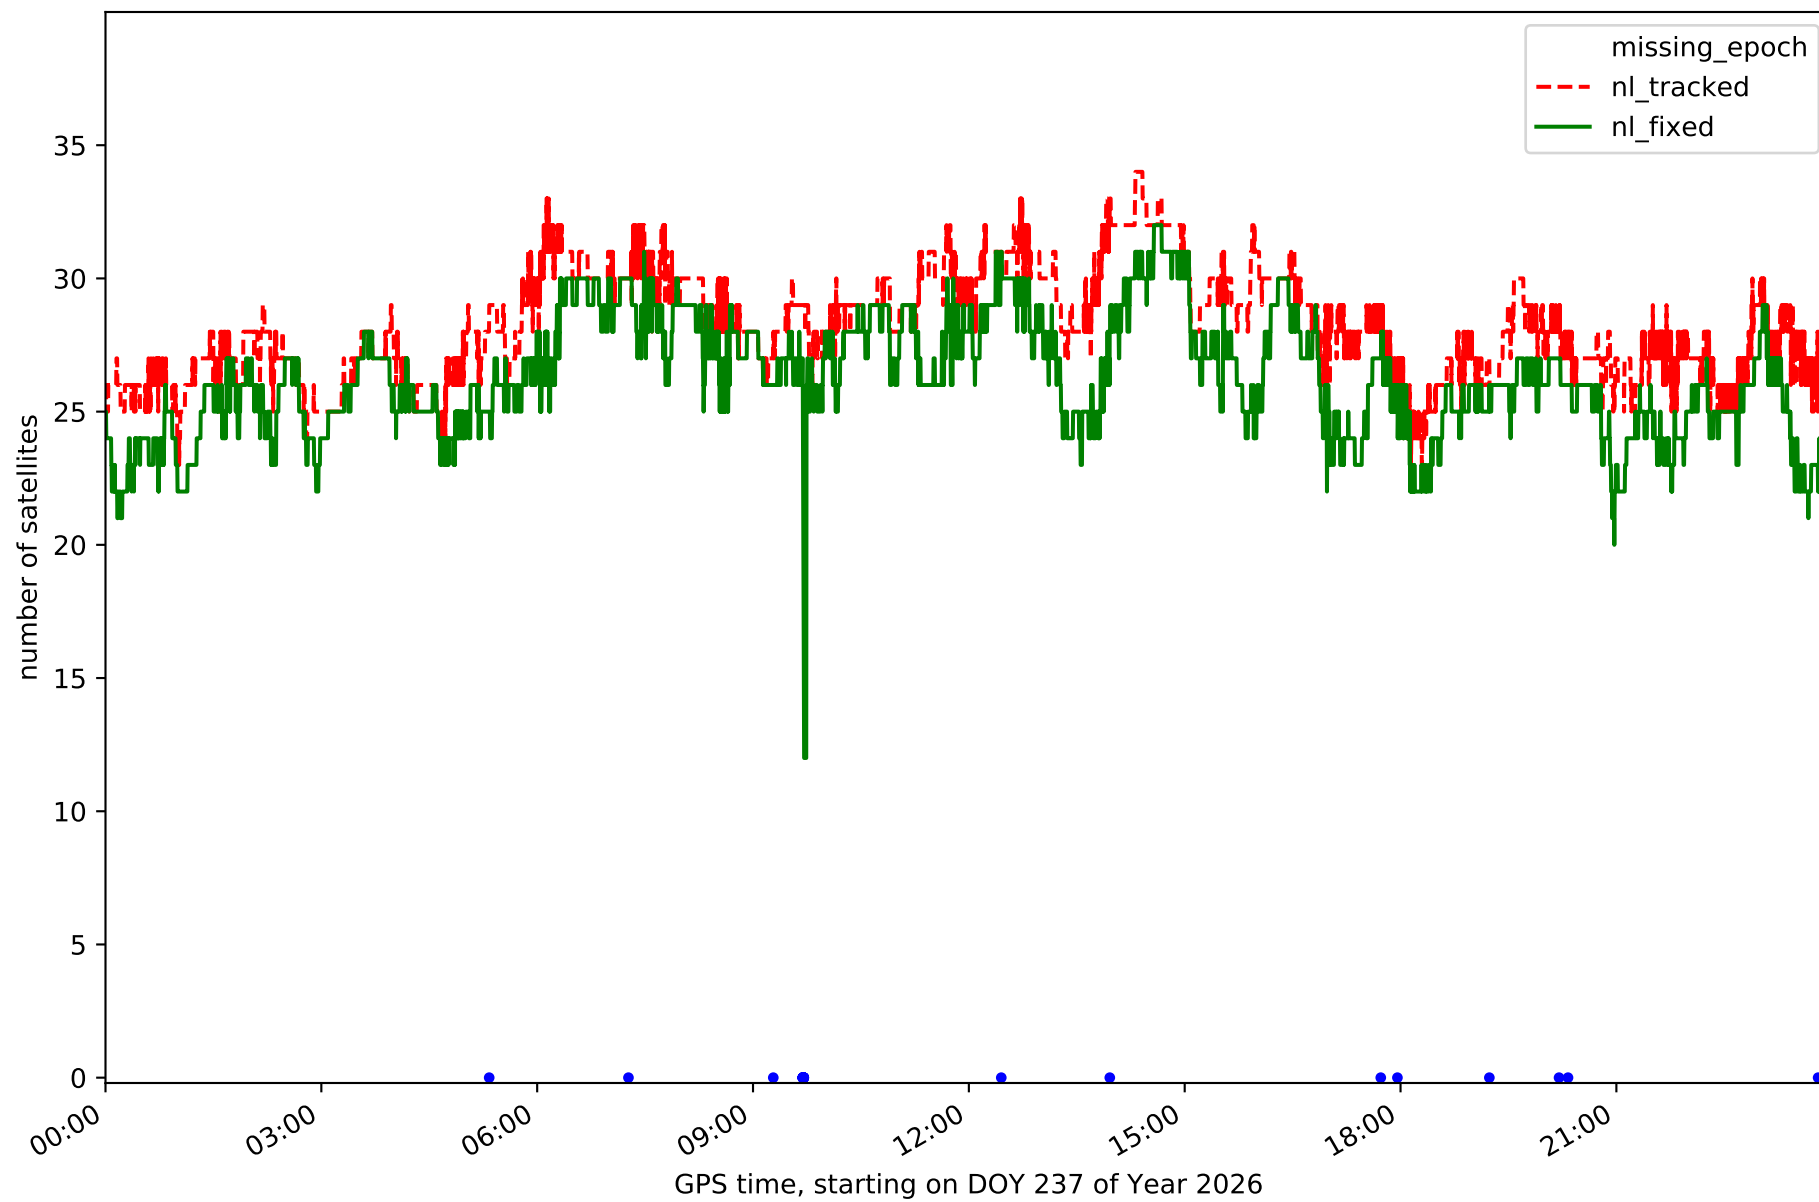


Station LP03 in network N32T

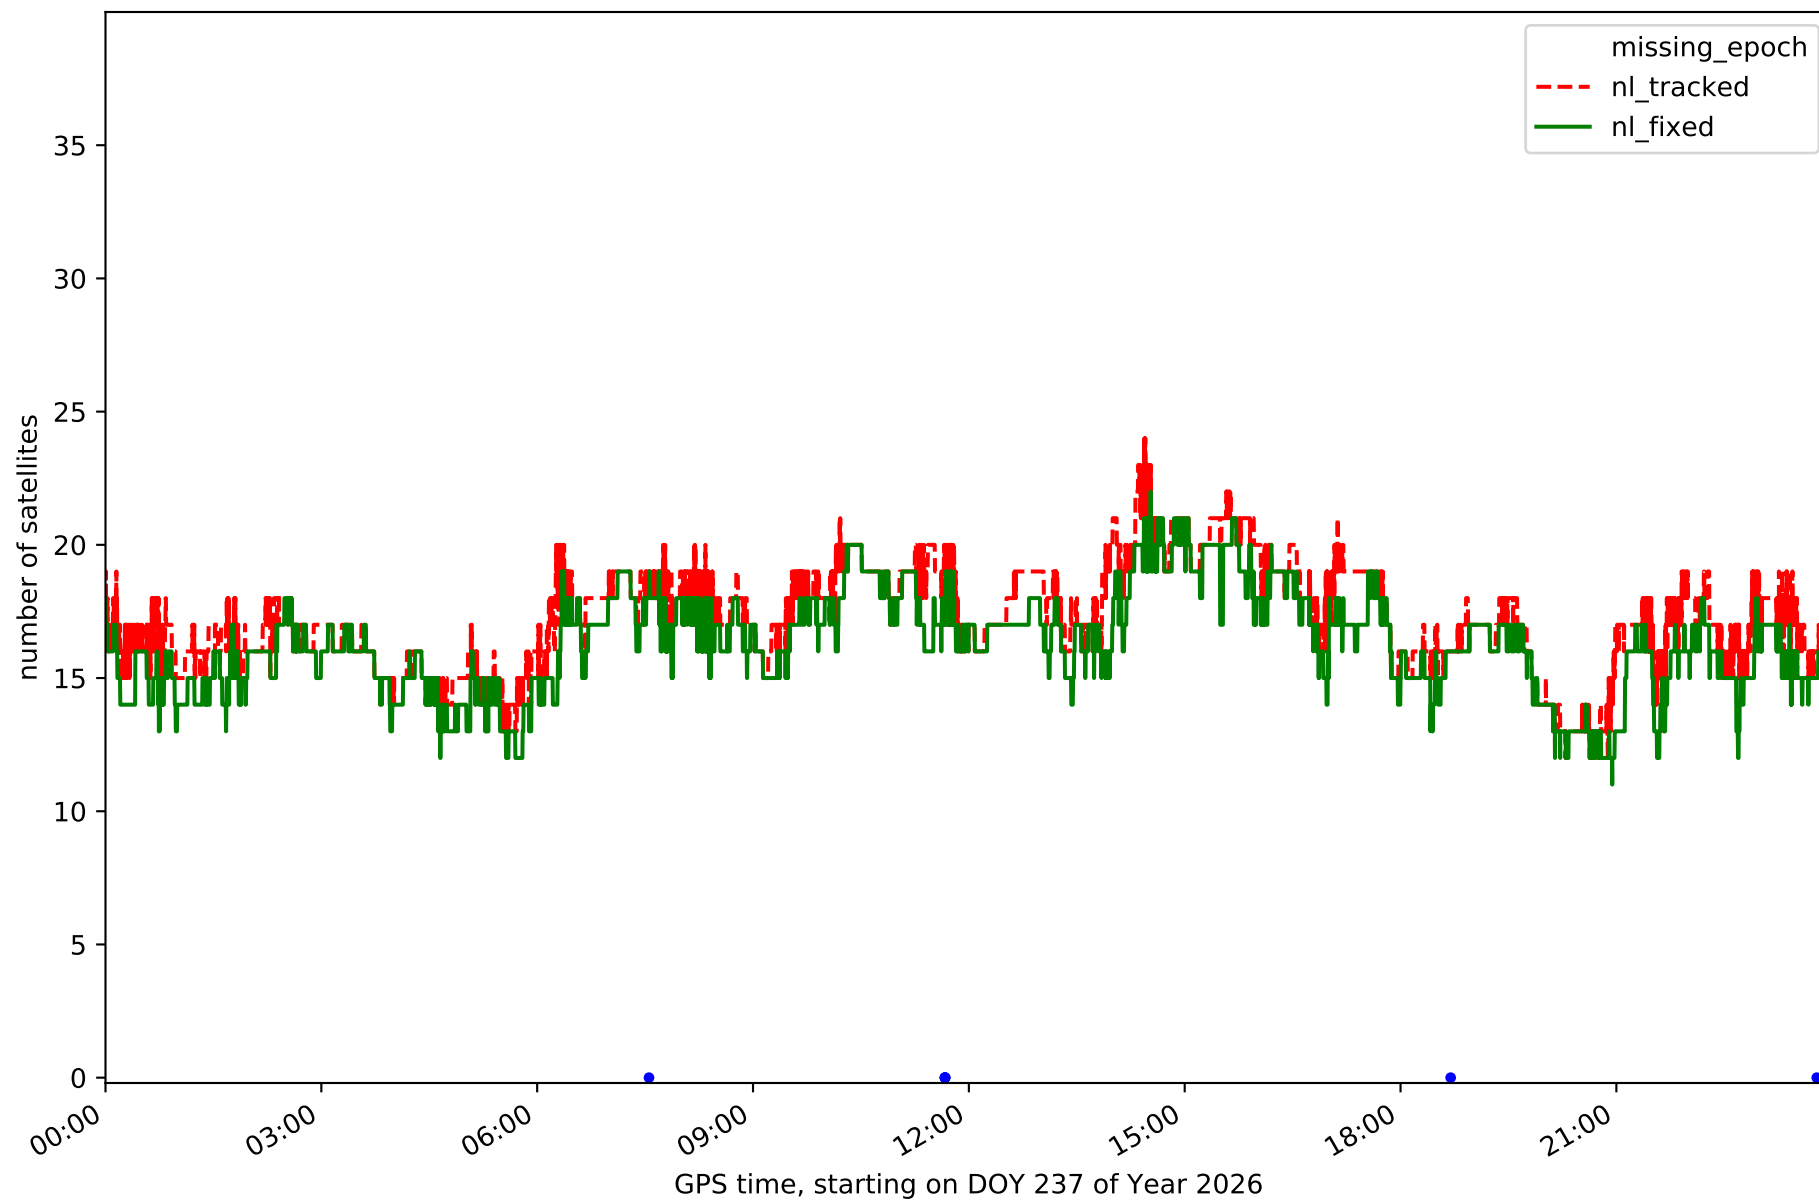


Station LPAL in network N32T

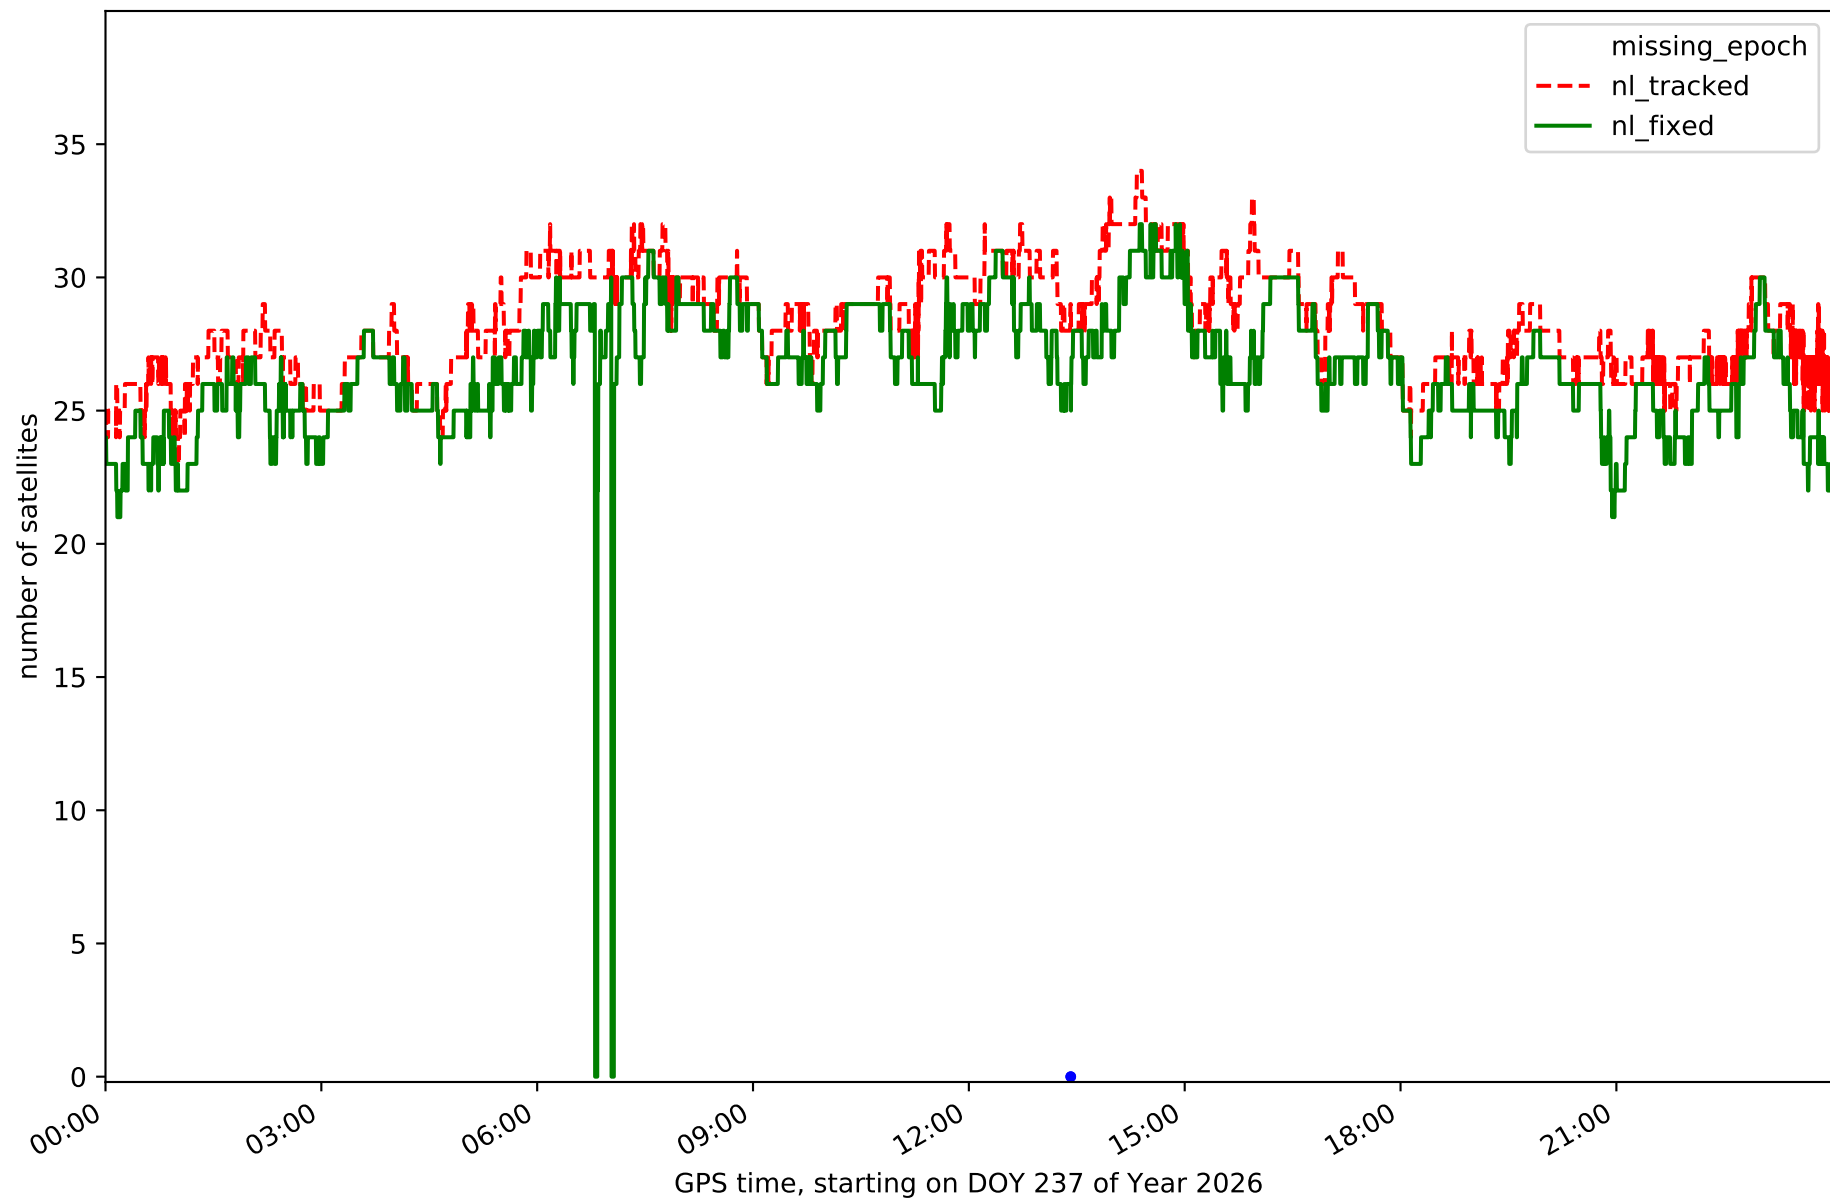


Station LRES in network N32T

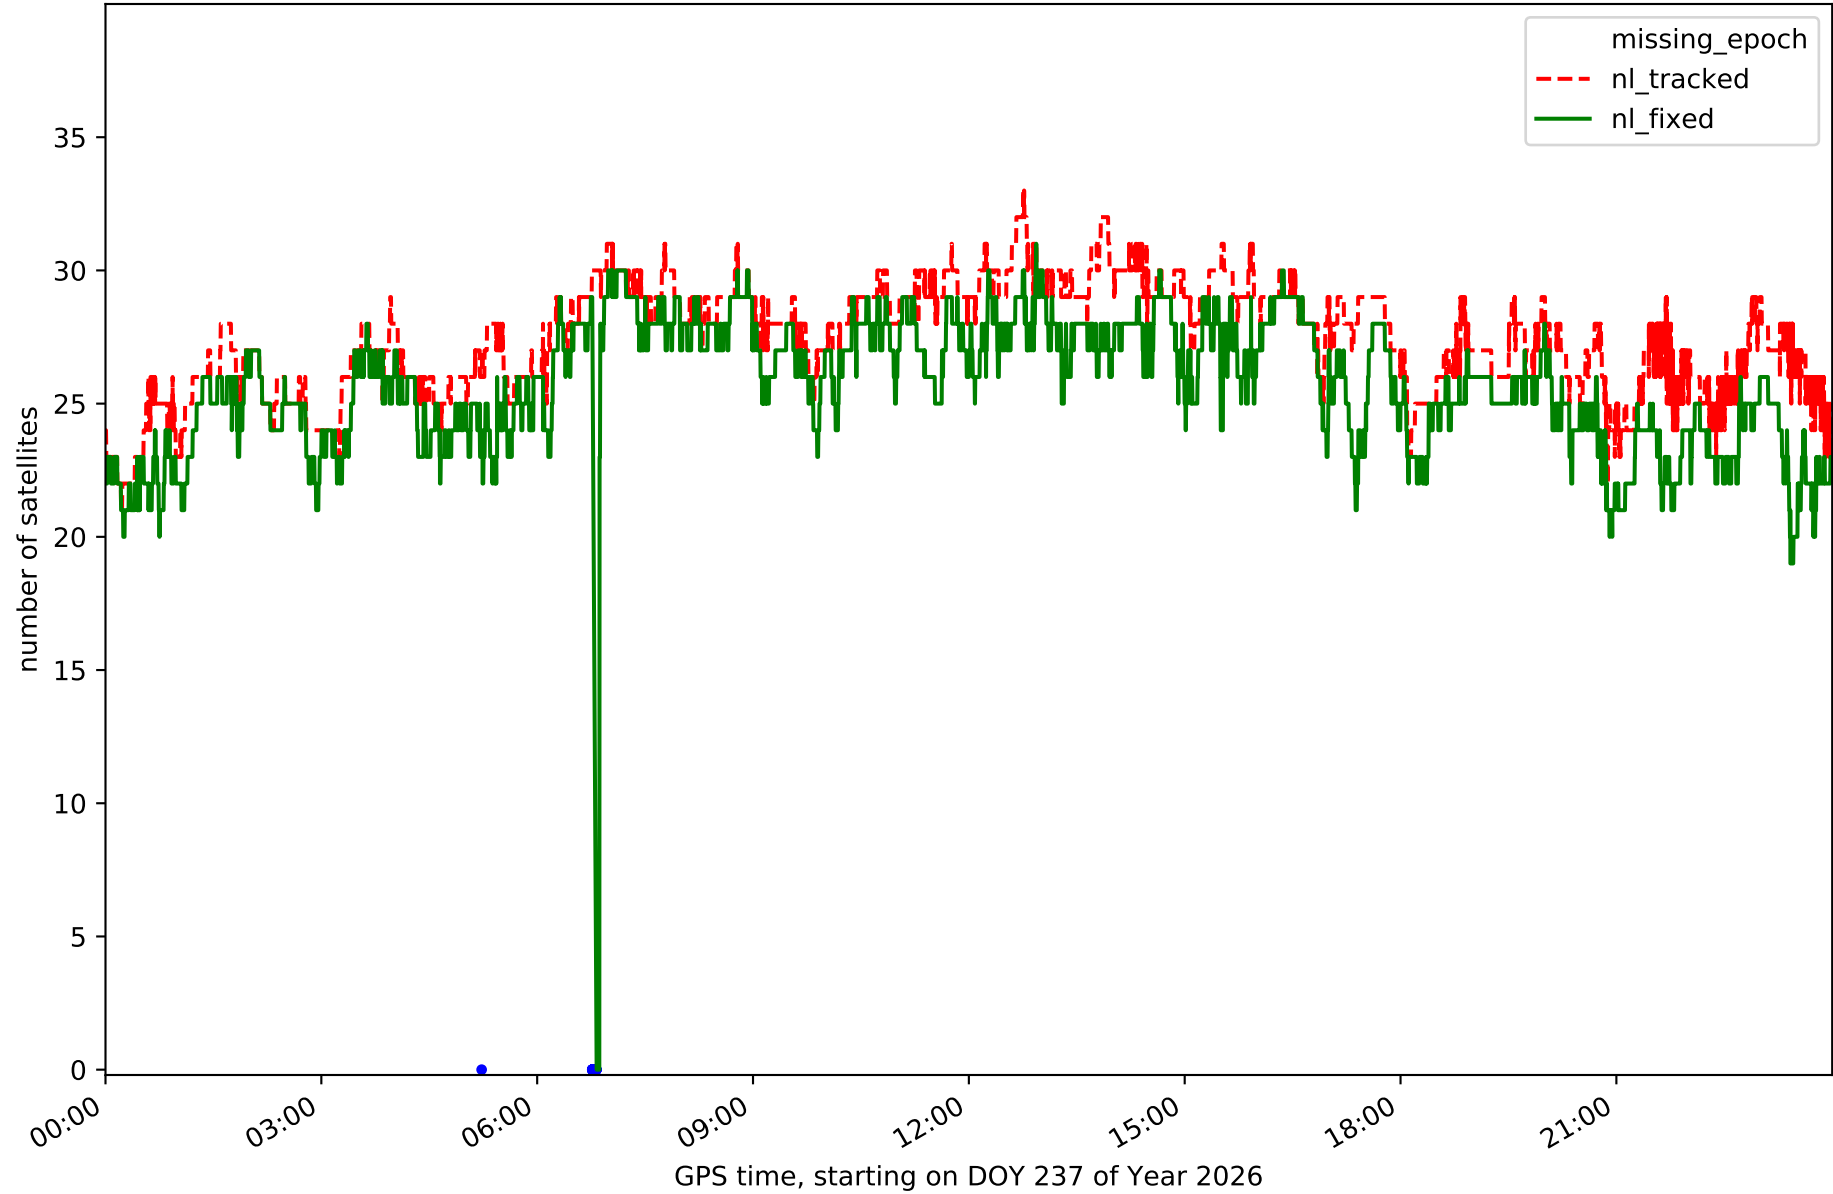


Station TN01 in network N32T

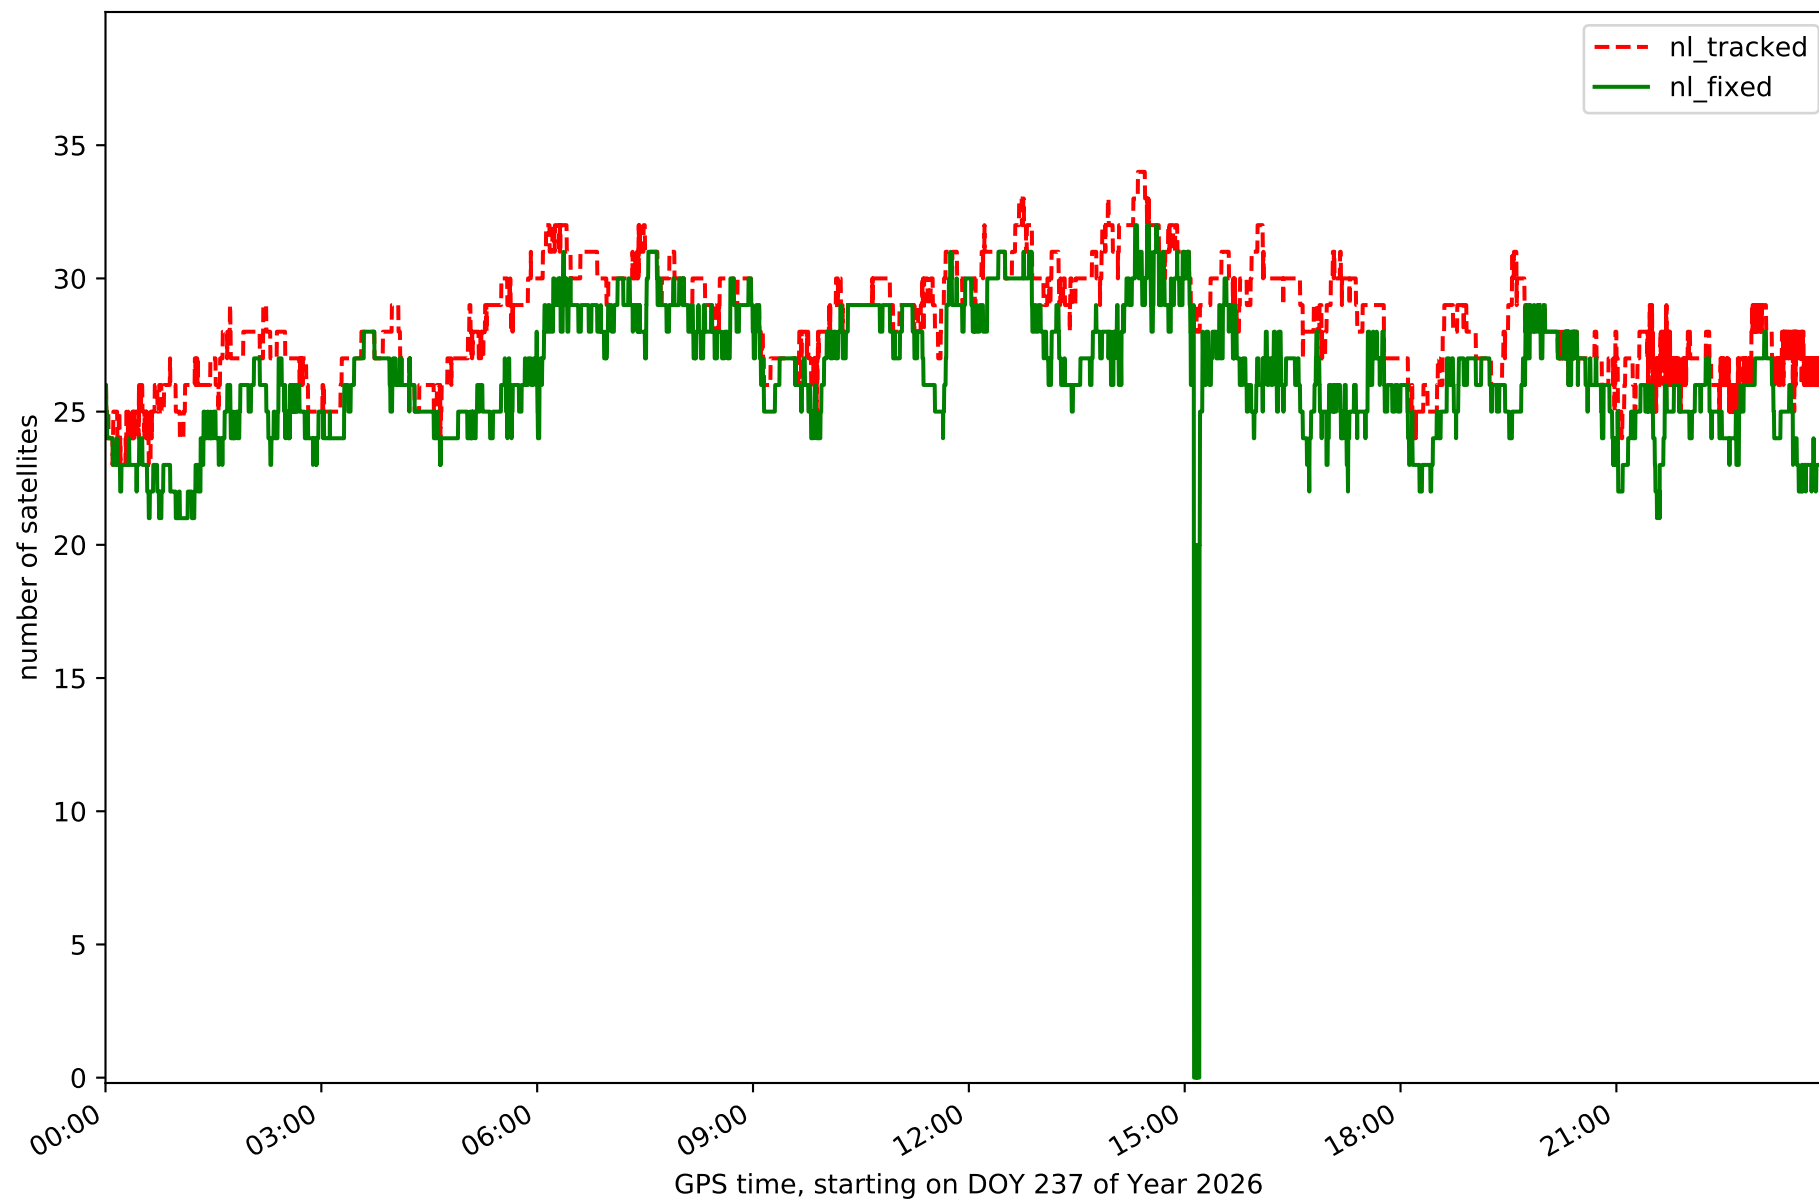


Station TN02 in network N32T

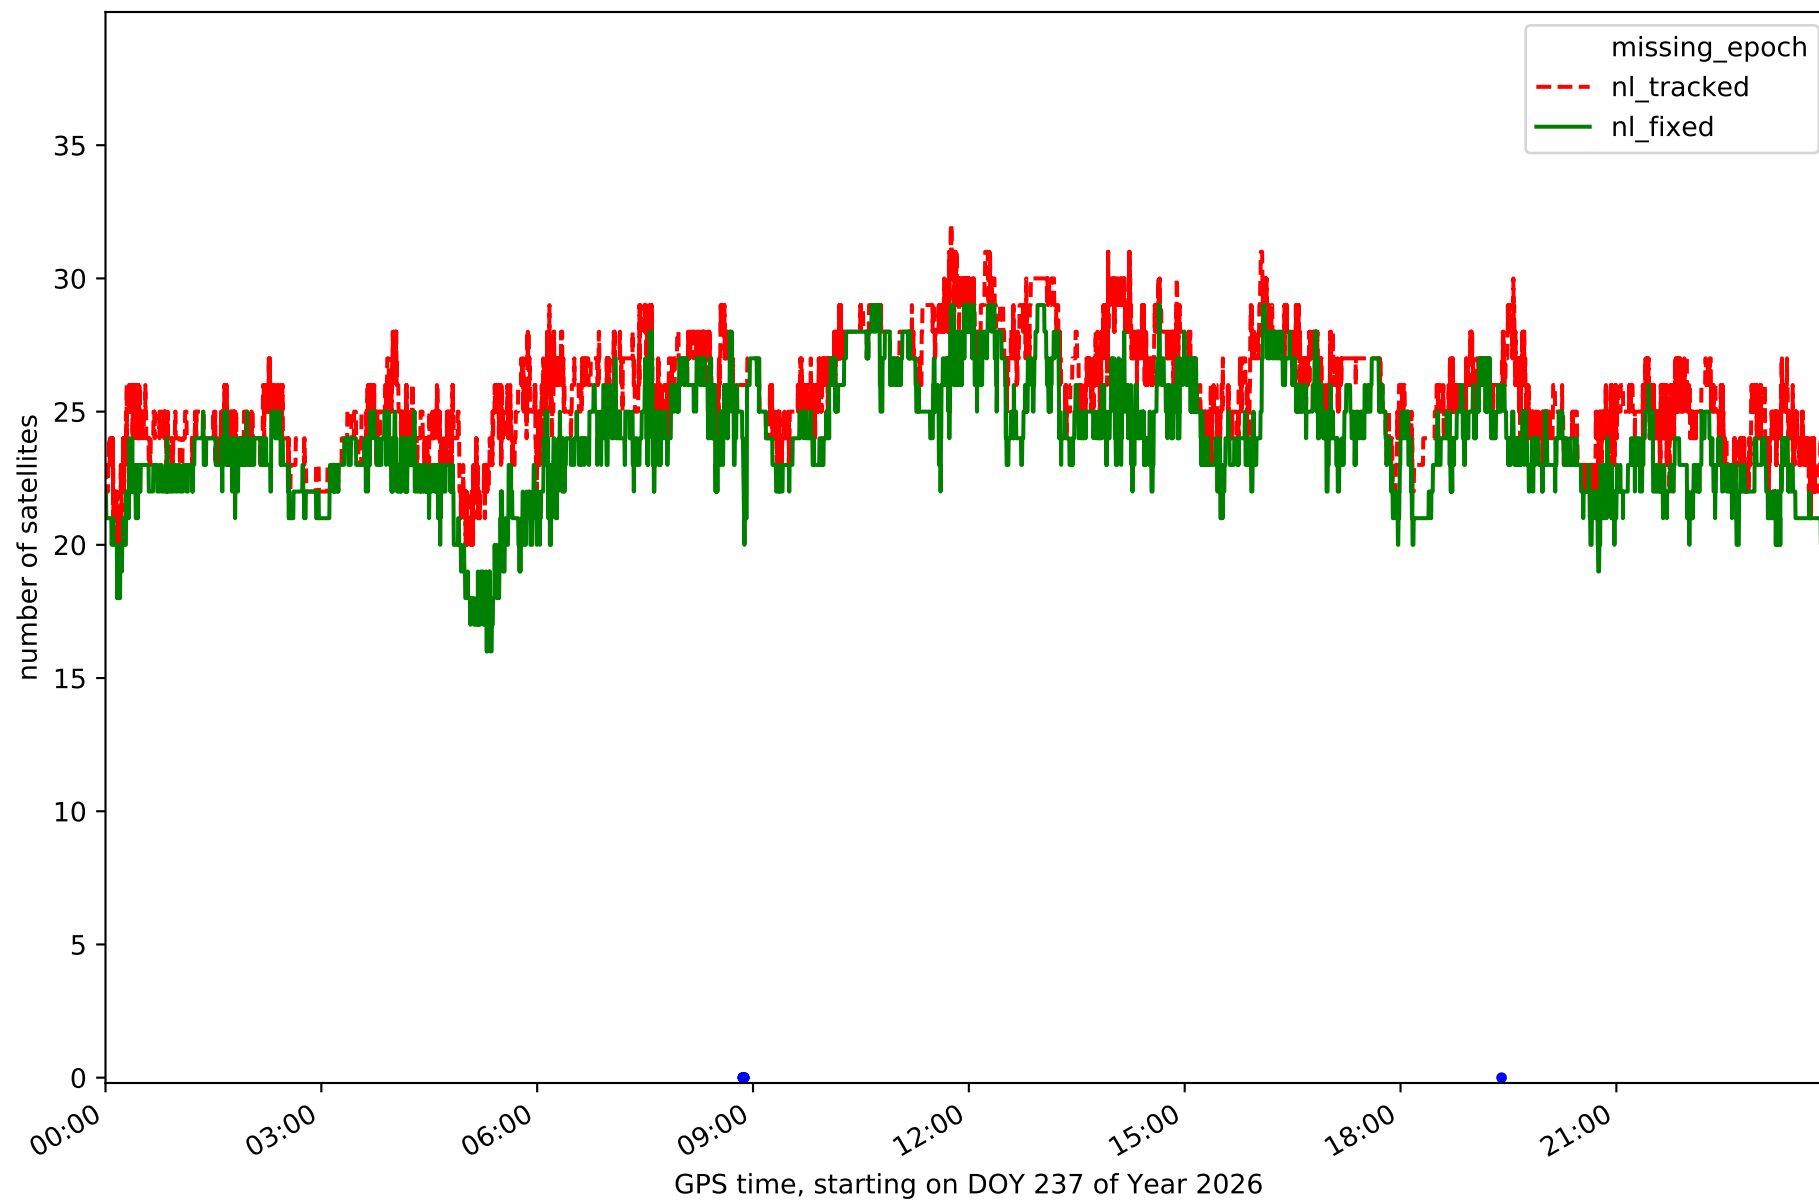


Station TN03 in network N32T

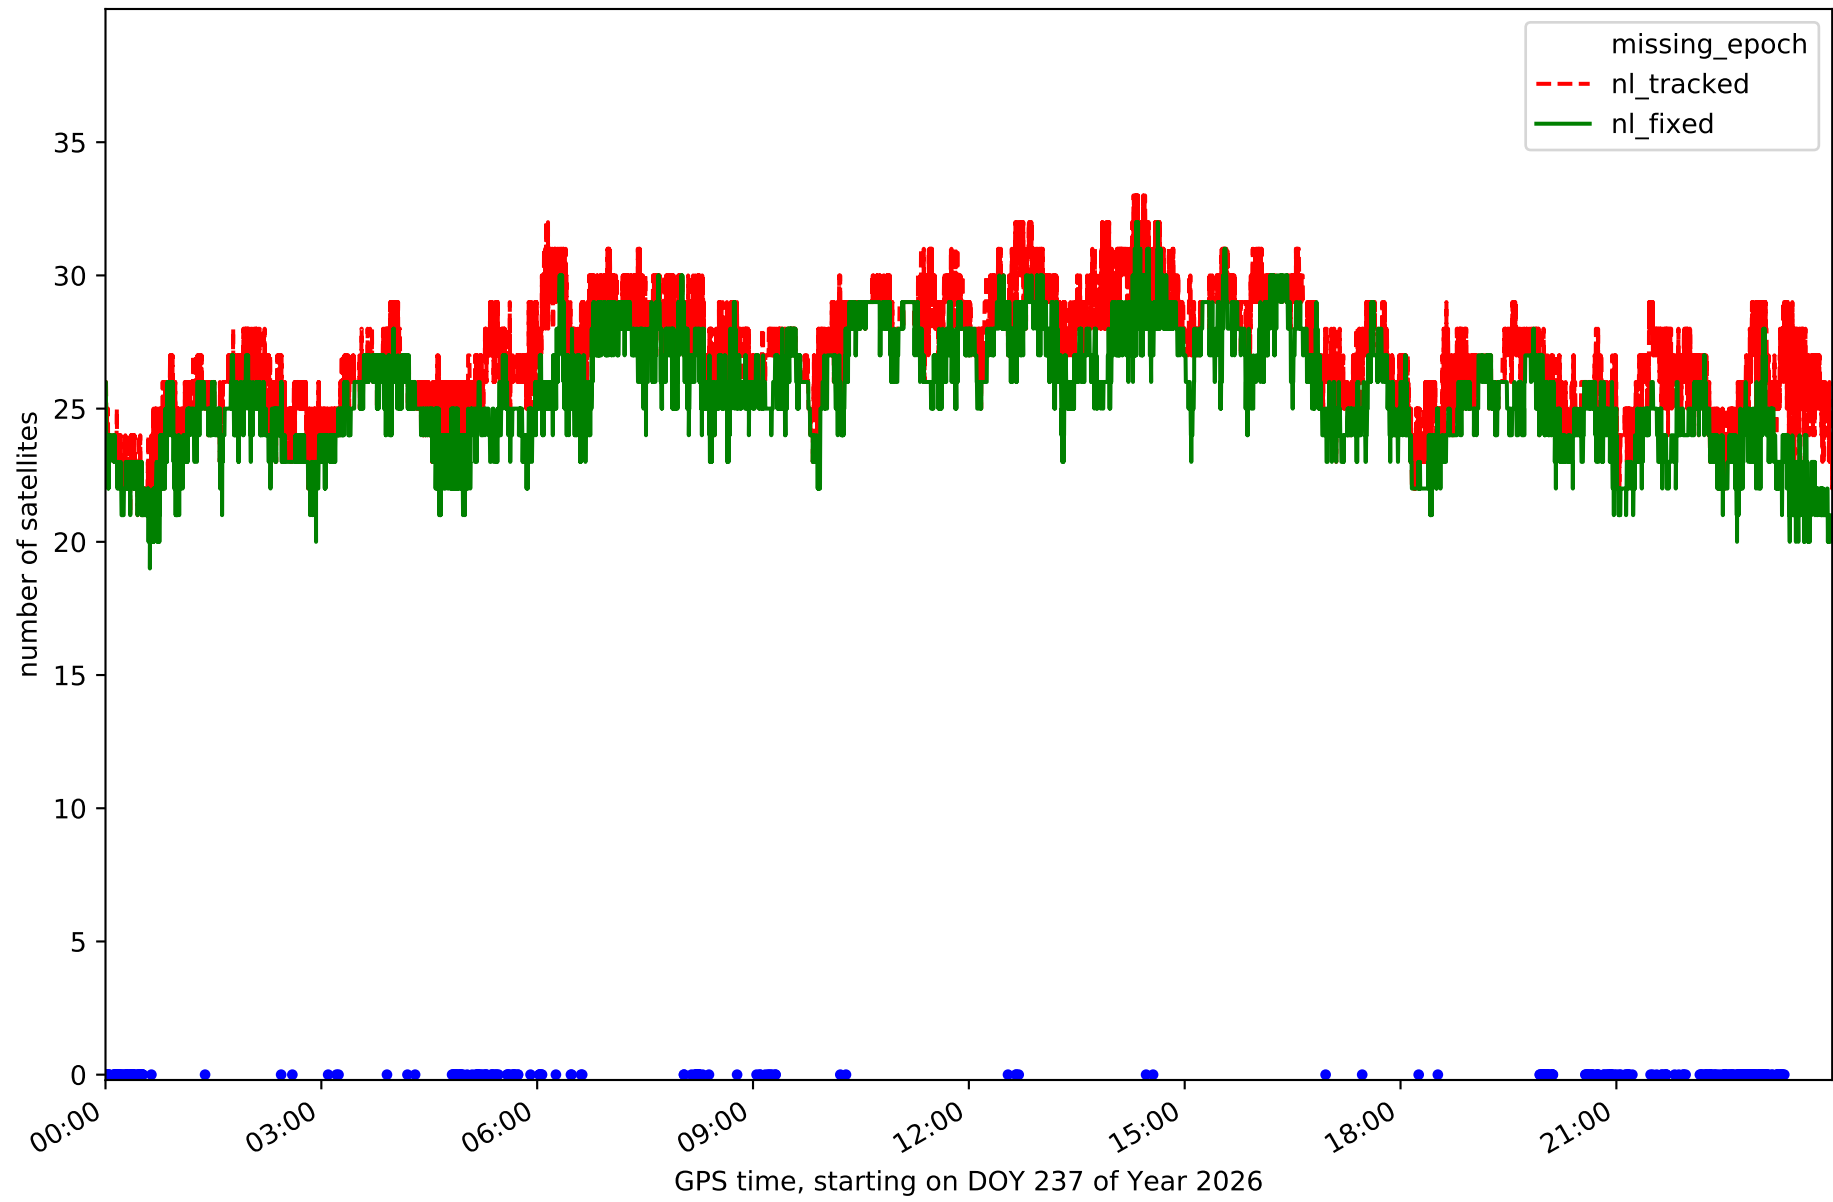


Station TN06 in network N32T

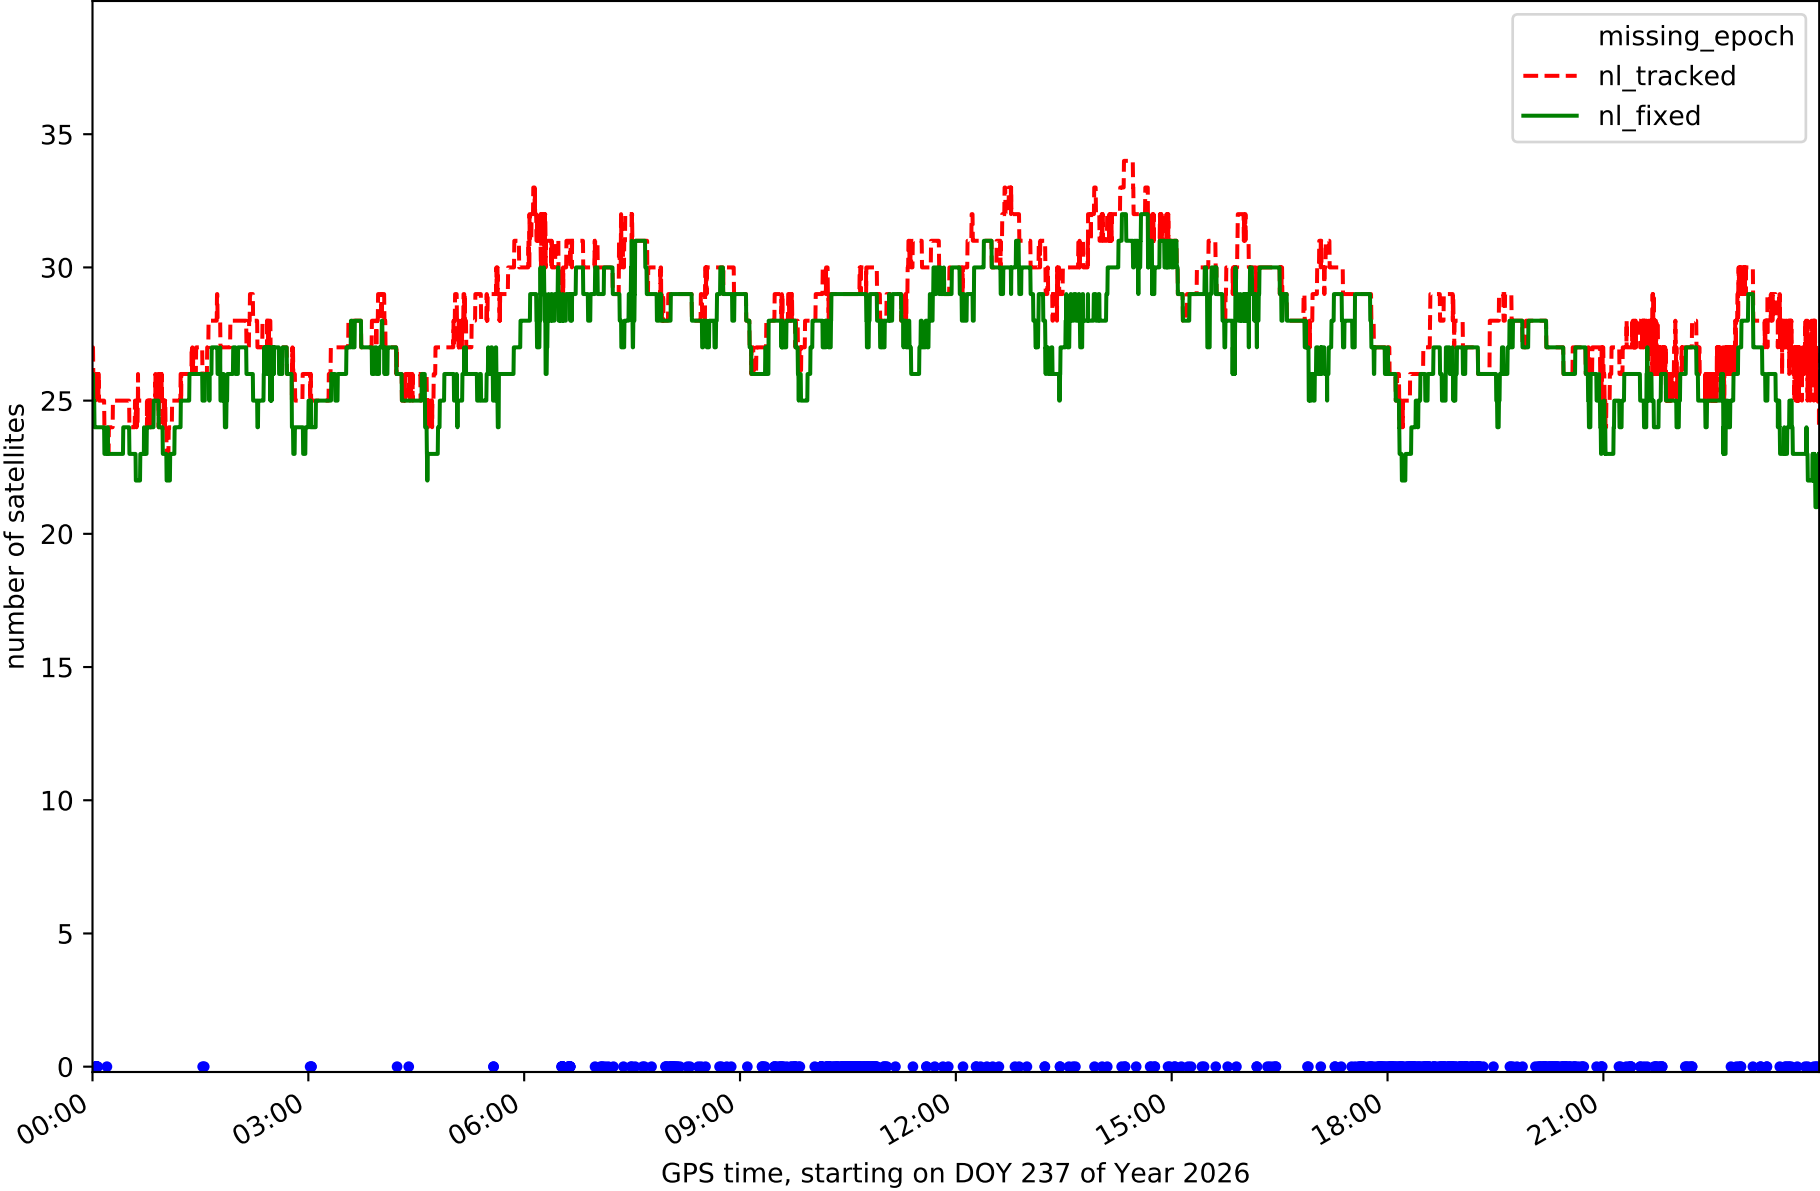


Station TN09 in network N32T

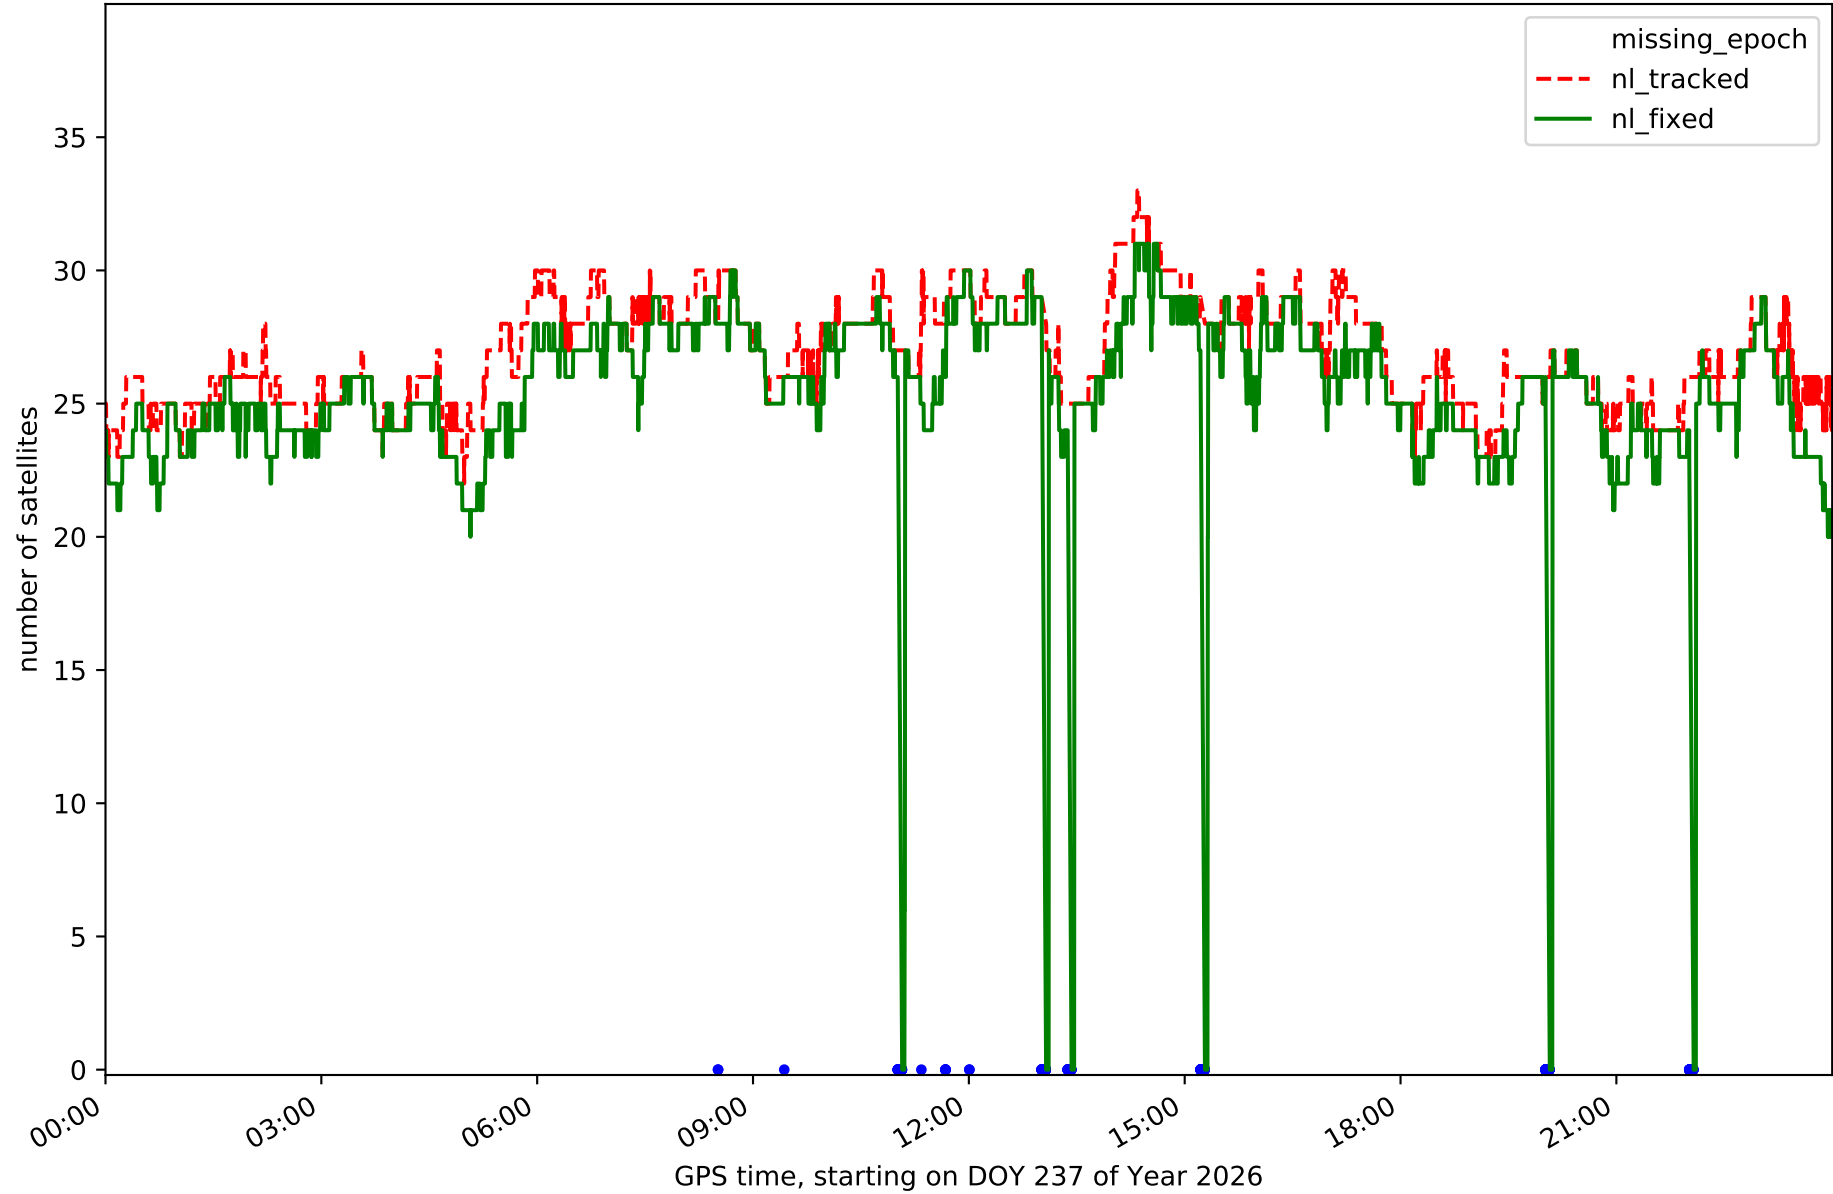


Station TE11 in network N32T

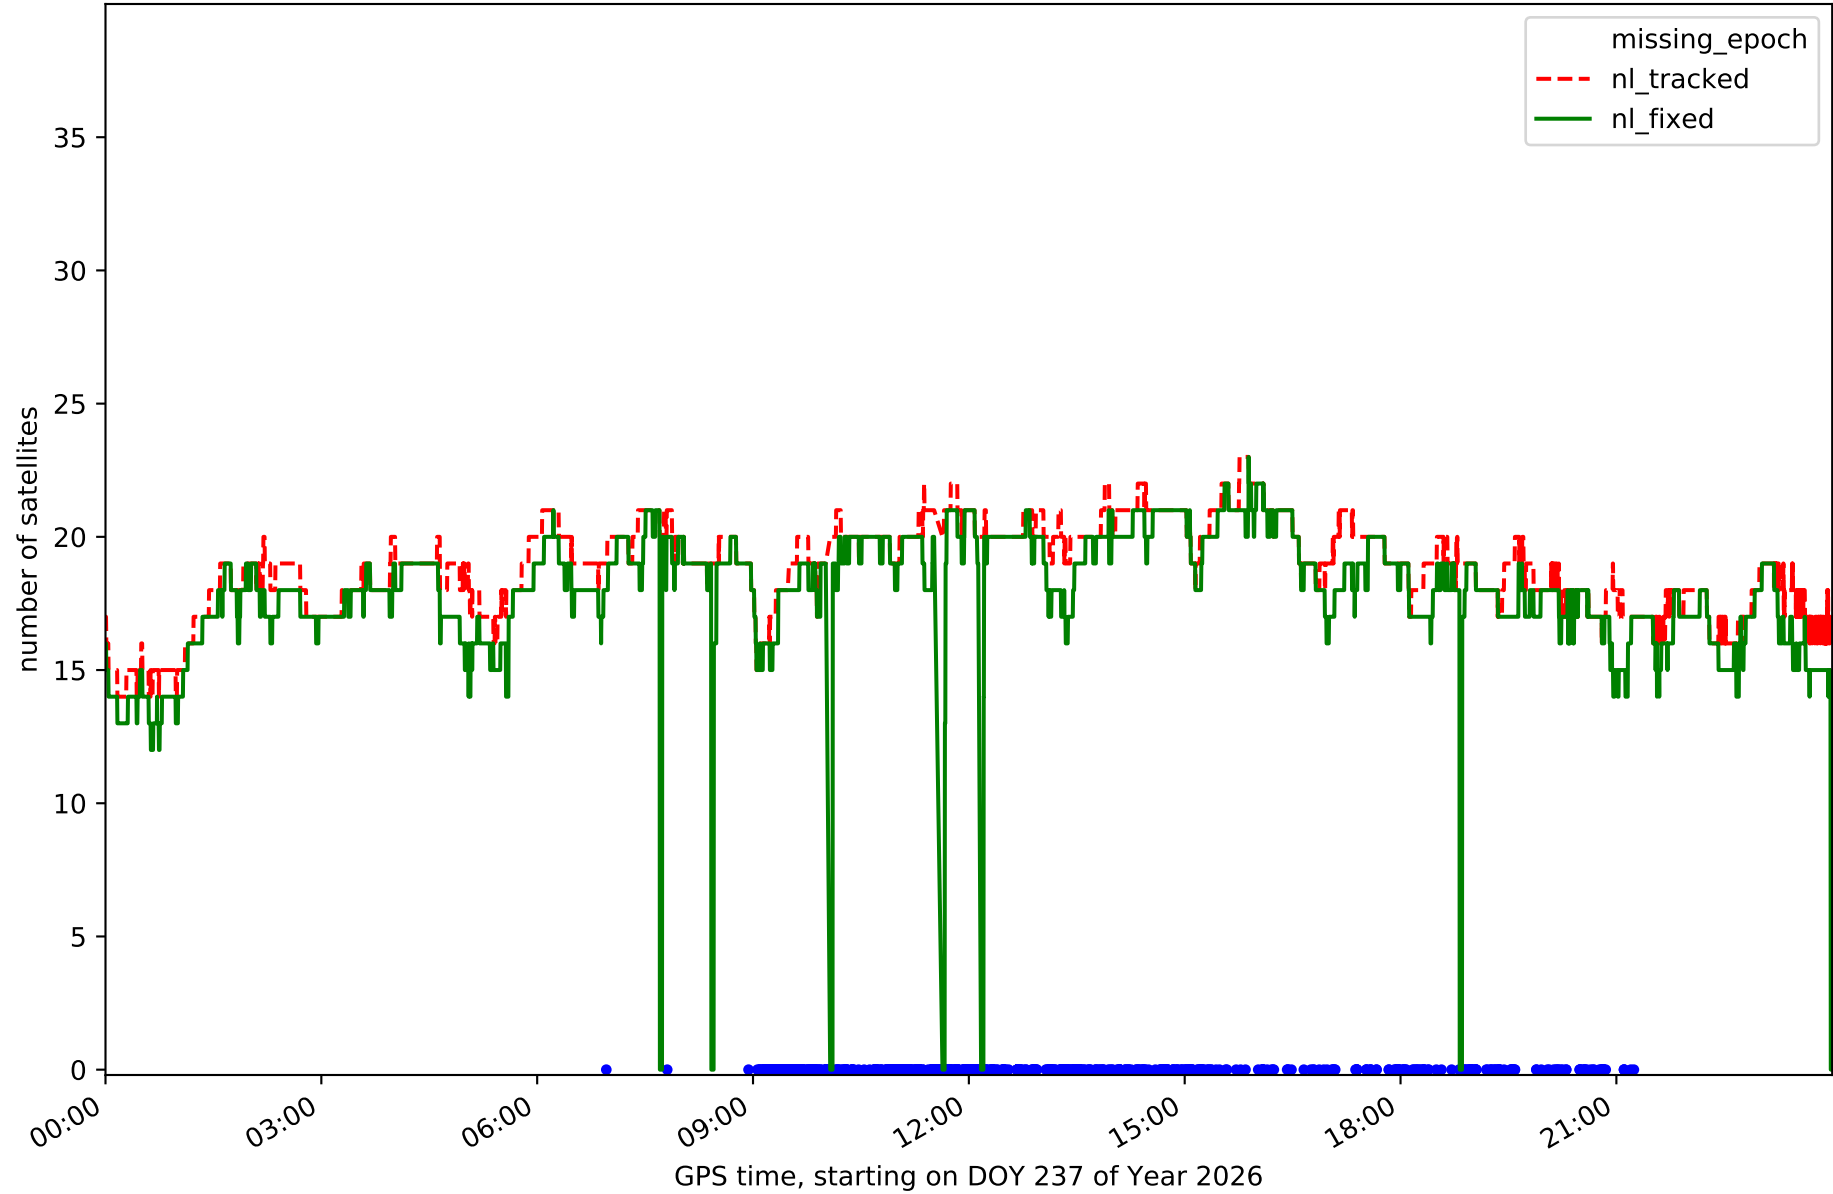


RefCheck for station EH01 in network N32T

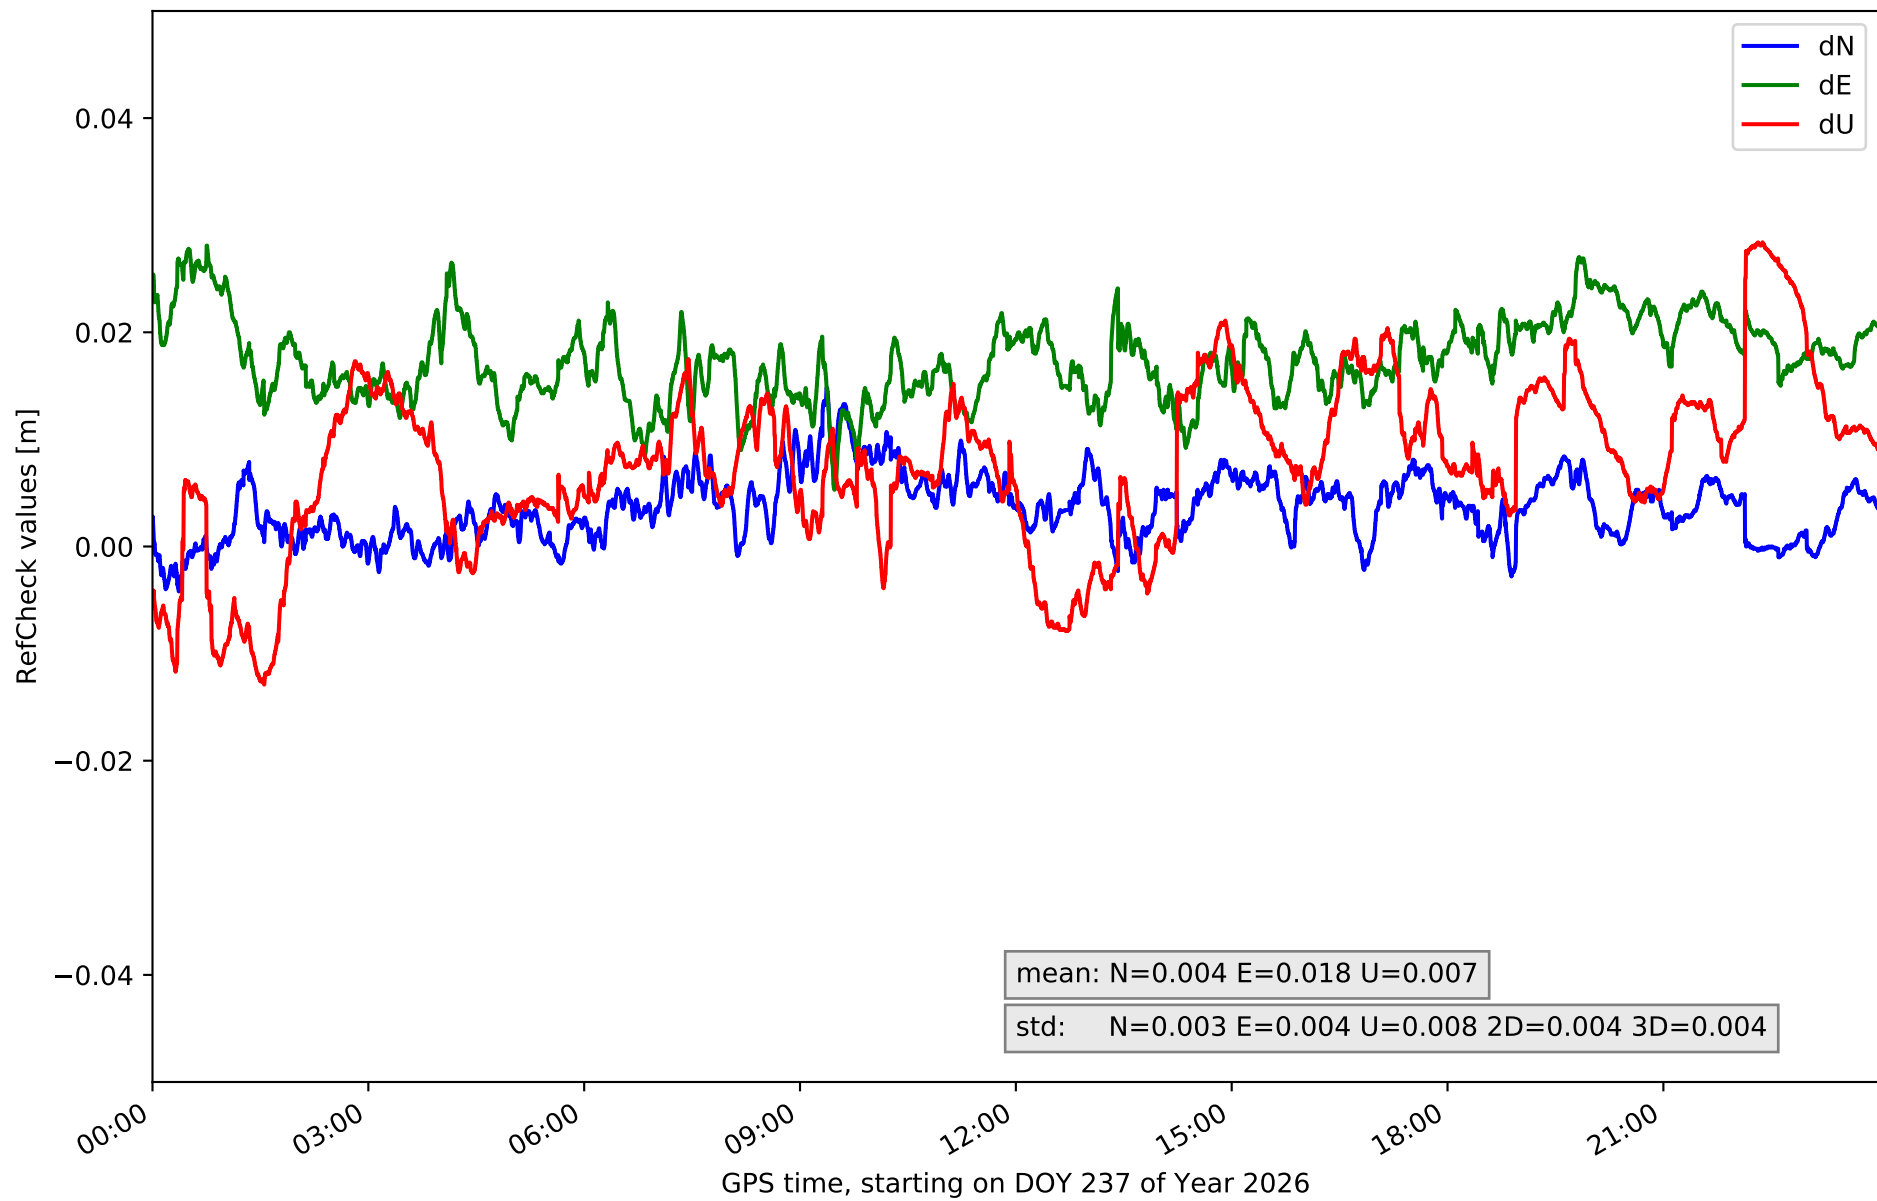


RefCheck for station EH02 in network N32T

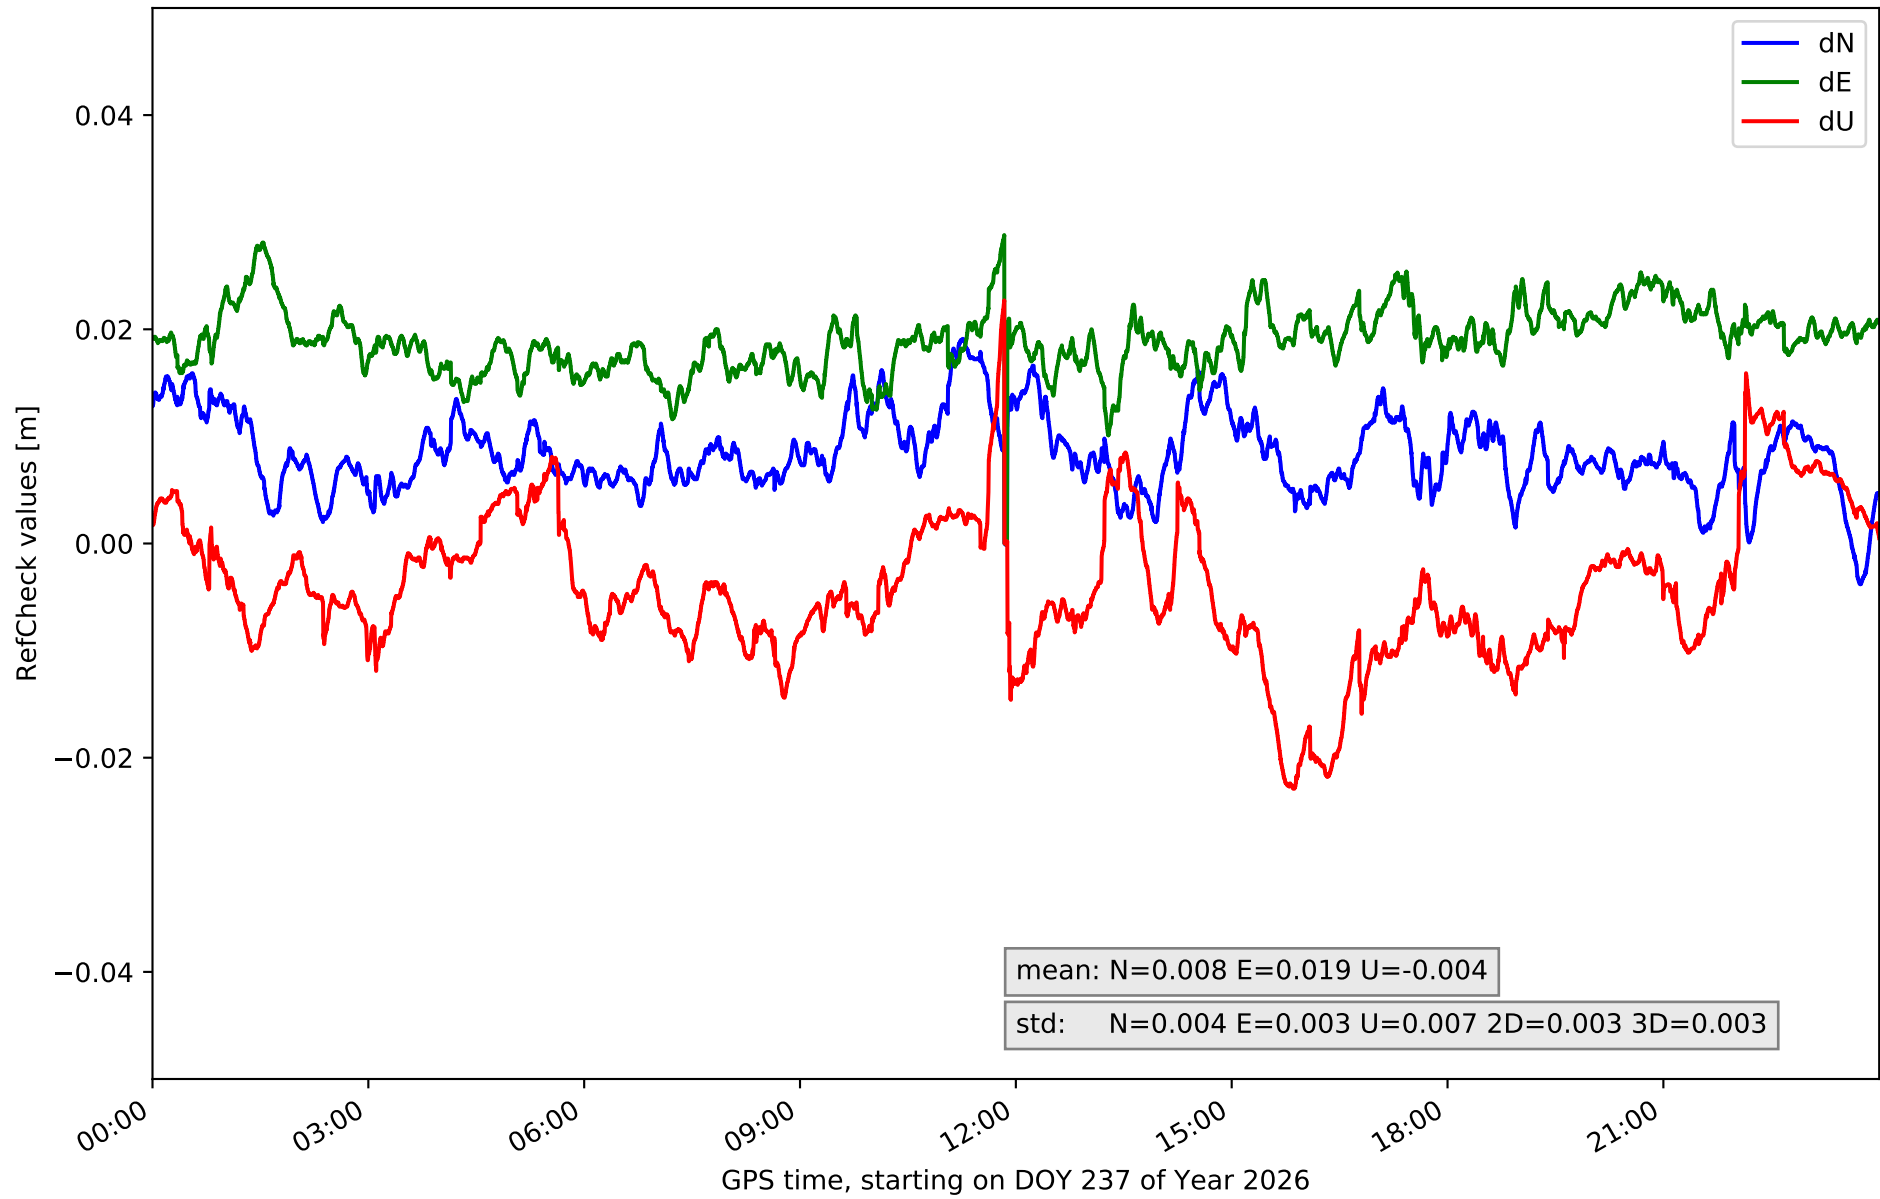


RefCheck for station GOM1 in network N32T

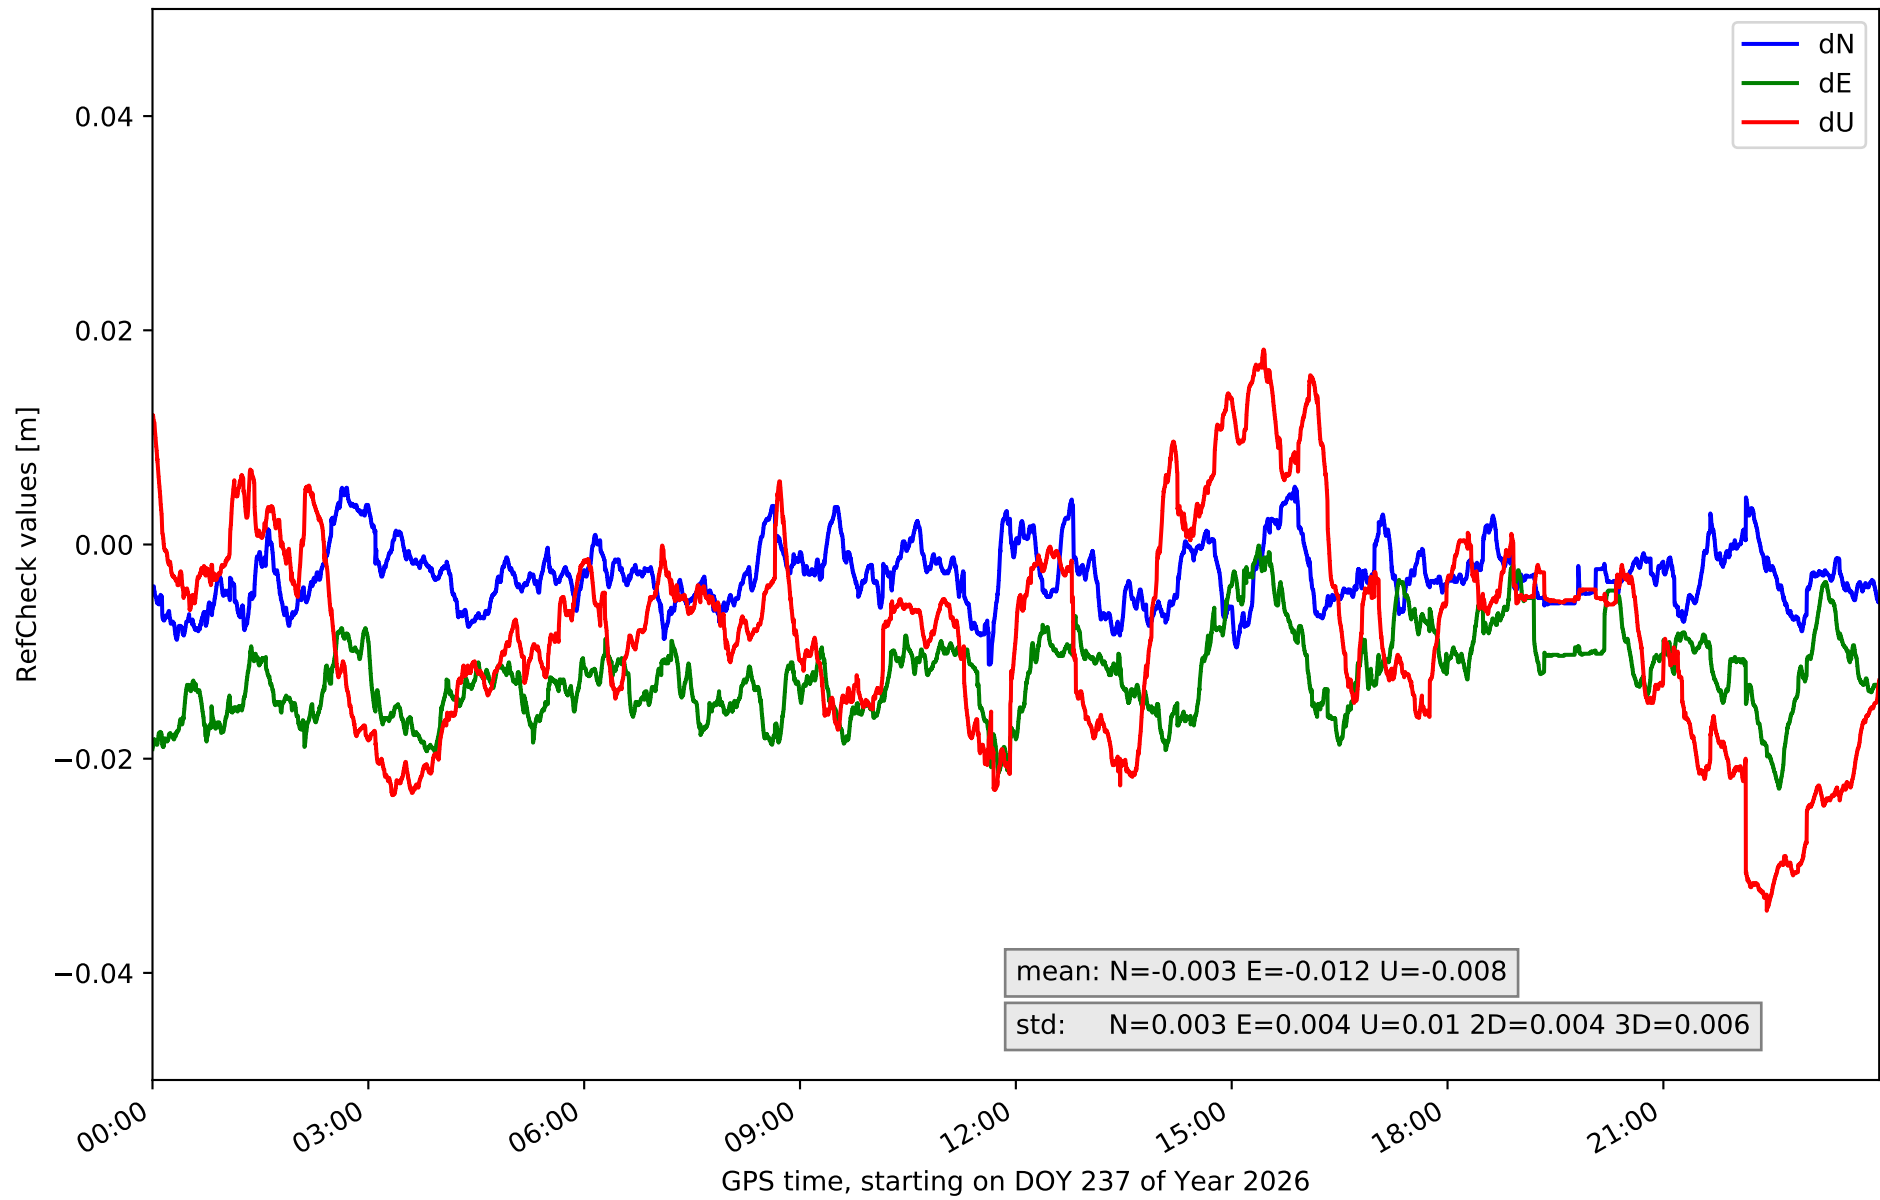


RefCheck for station GOME in network N32T

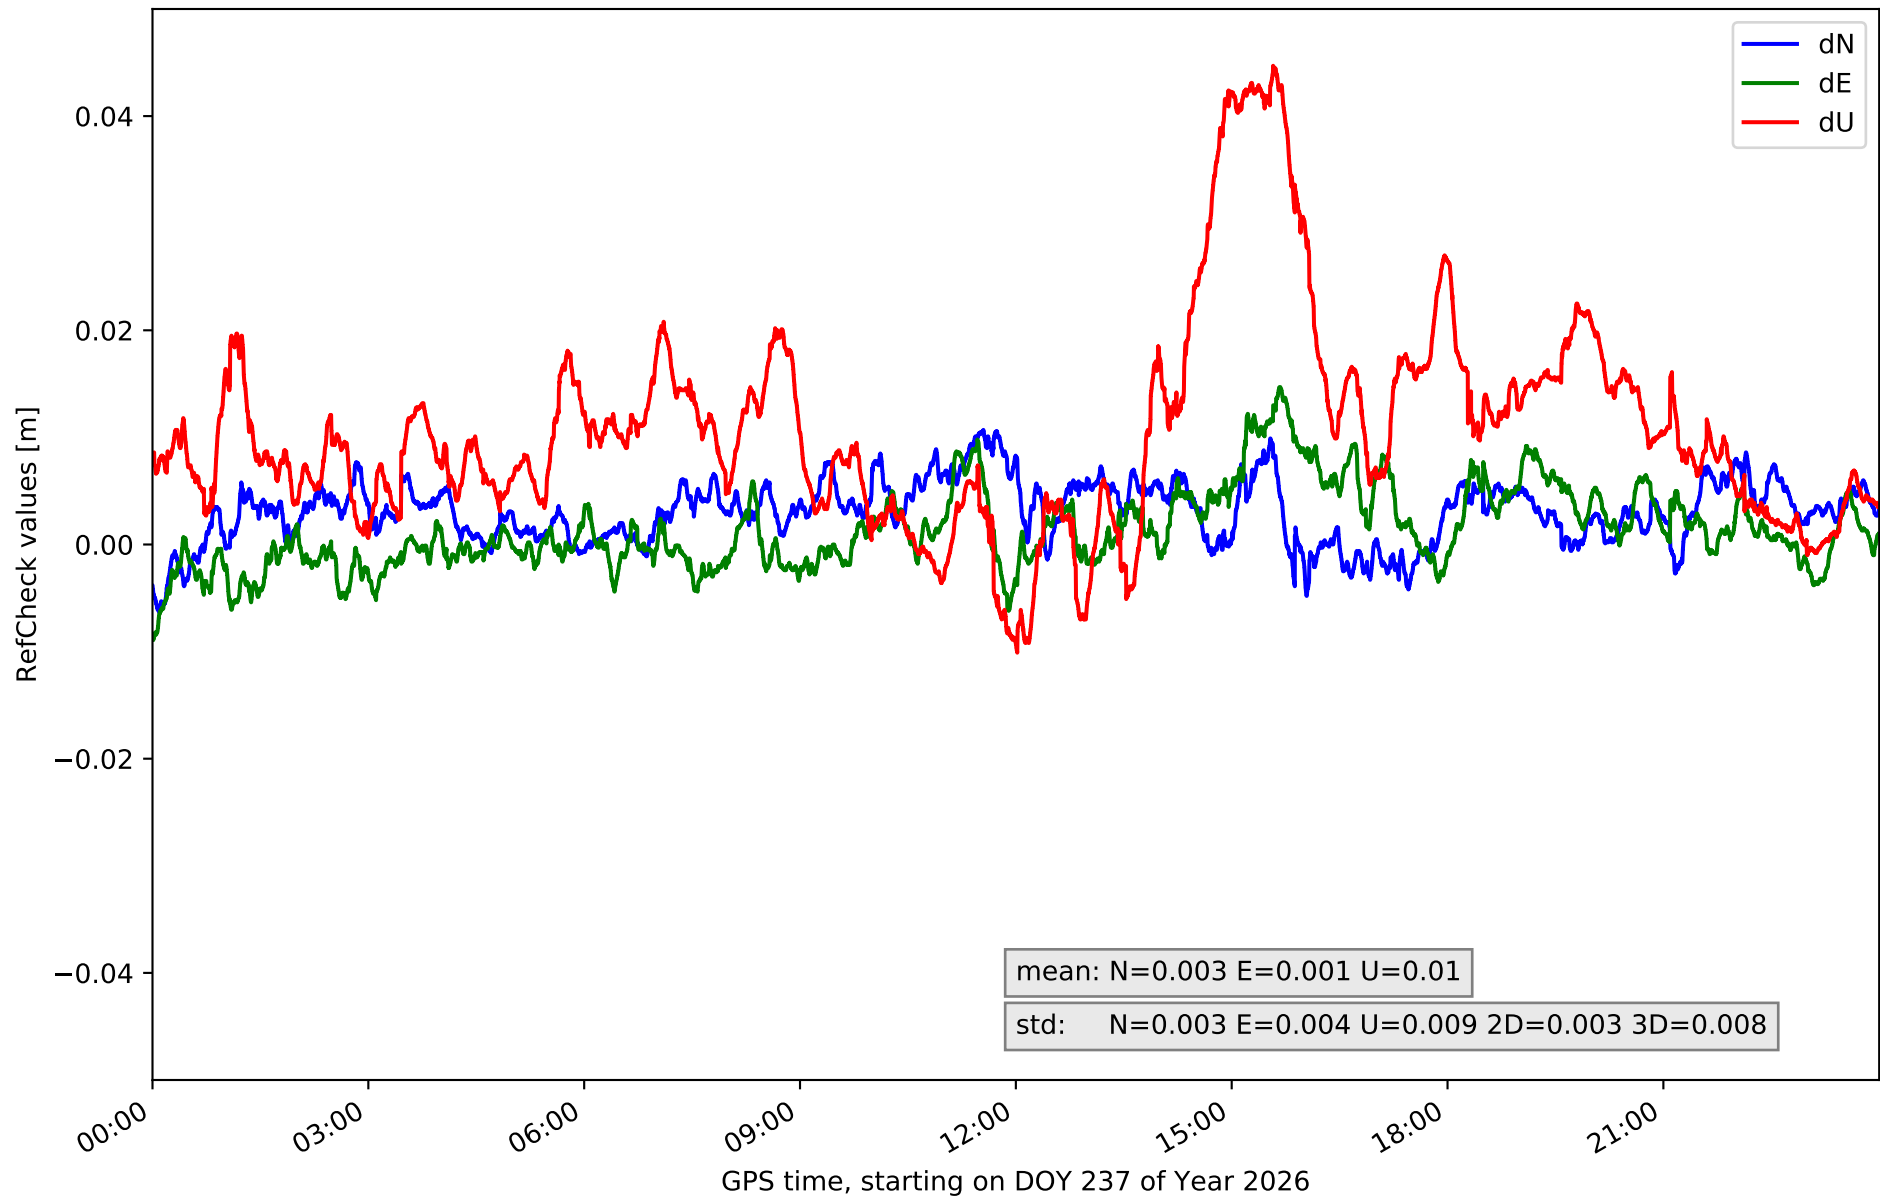


RefCheck for station IZAN in network N32T

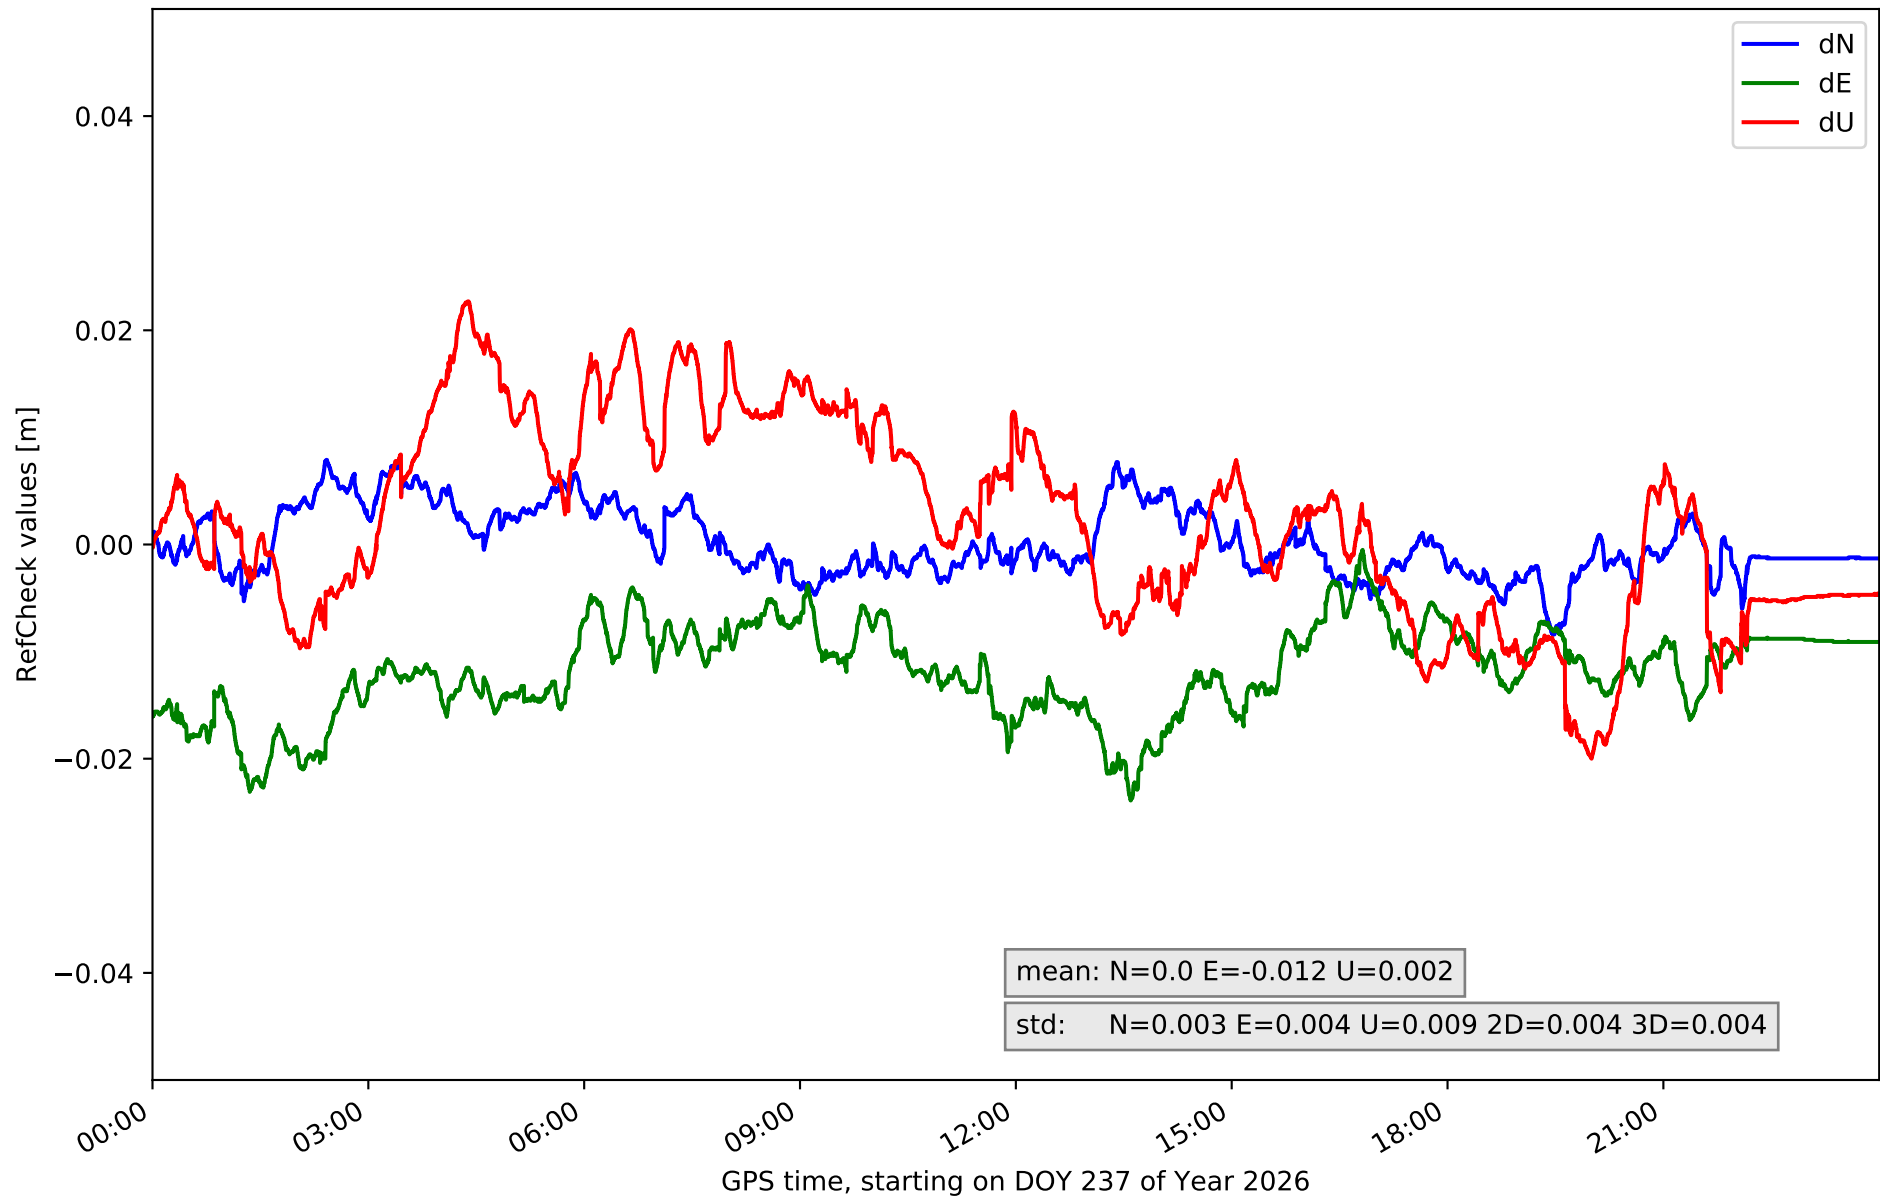


RefCheck for station LP01 in network N32T

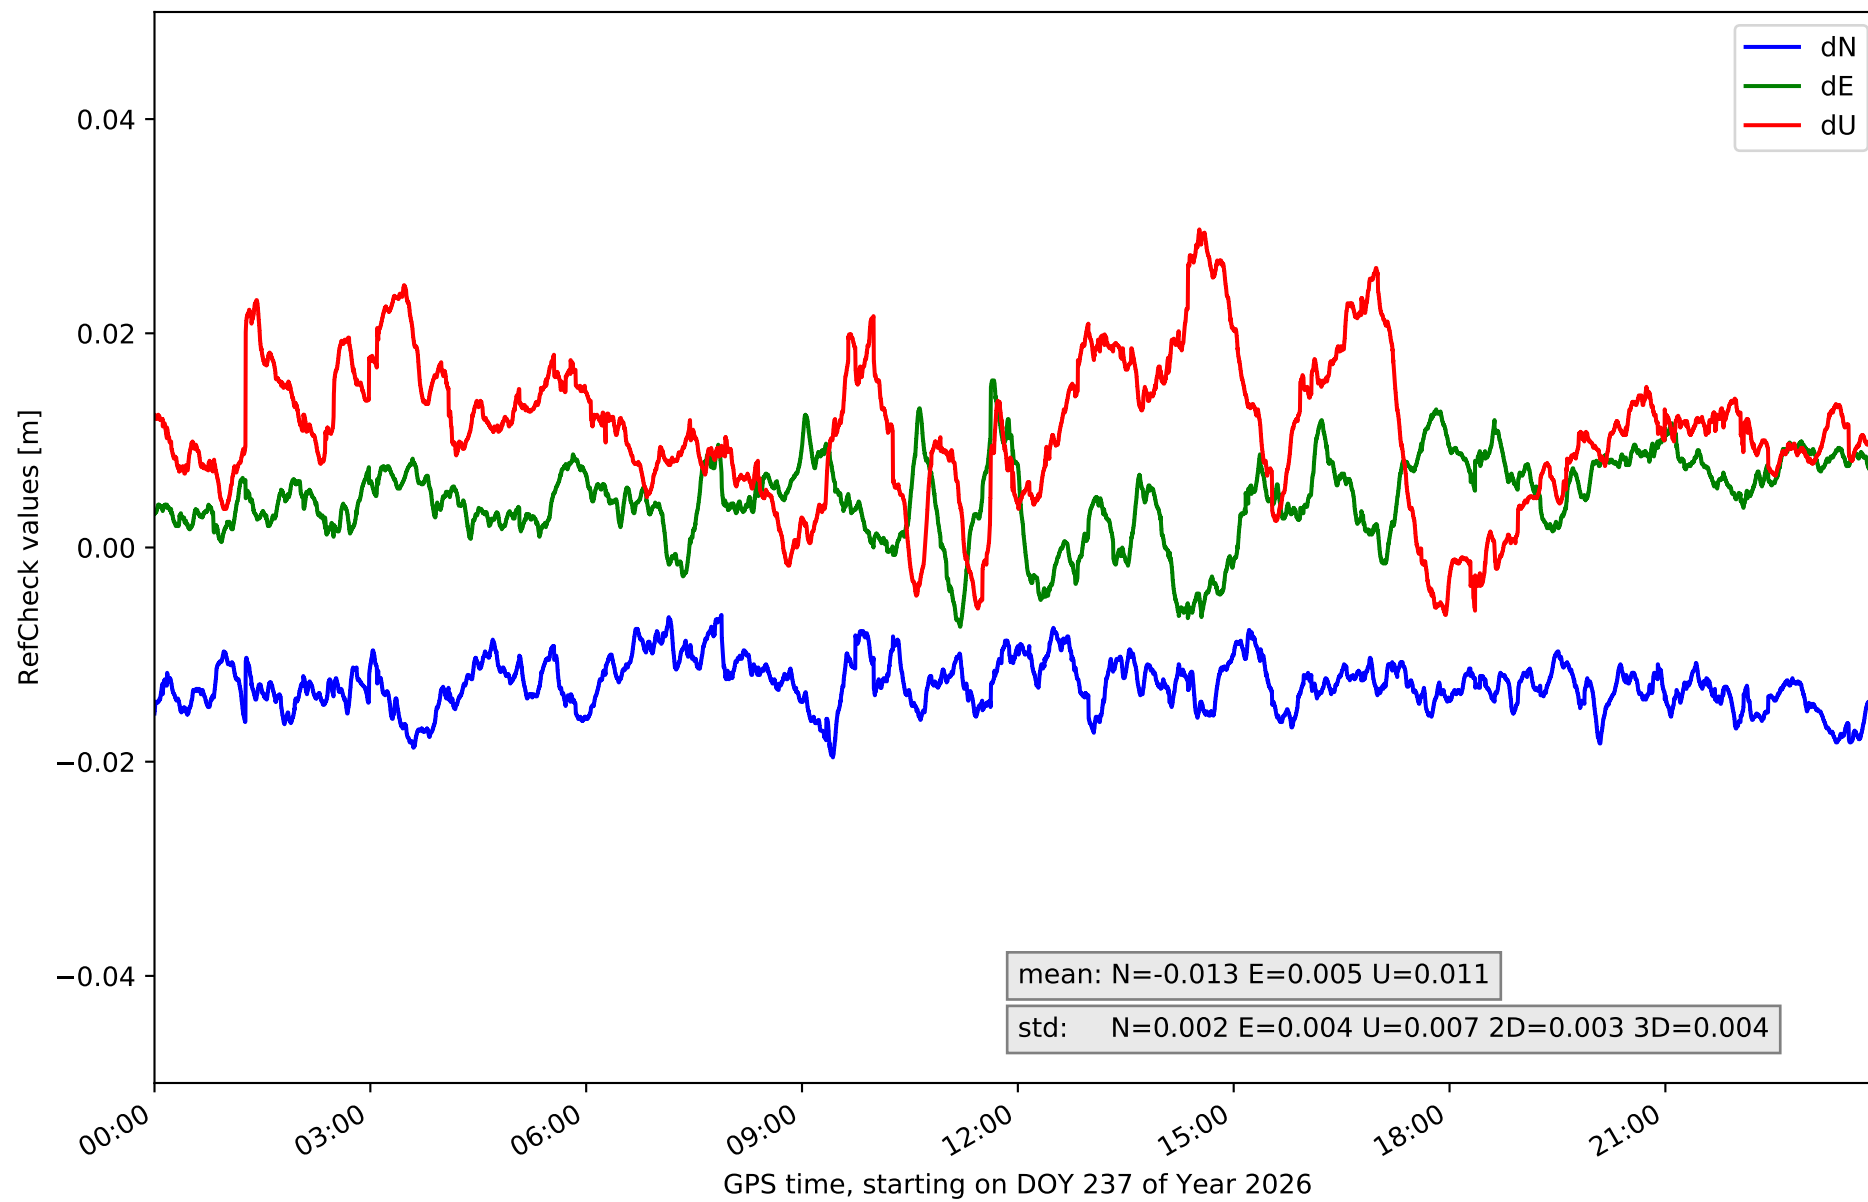


RefCheck for station LP03 in network N32T

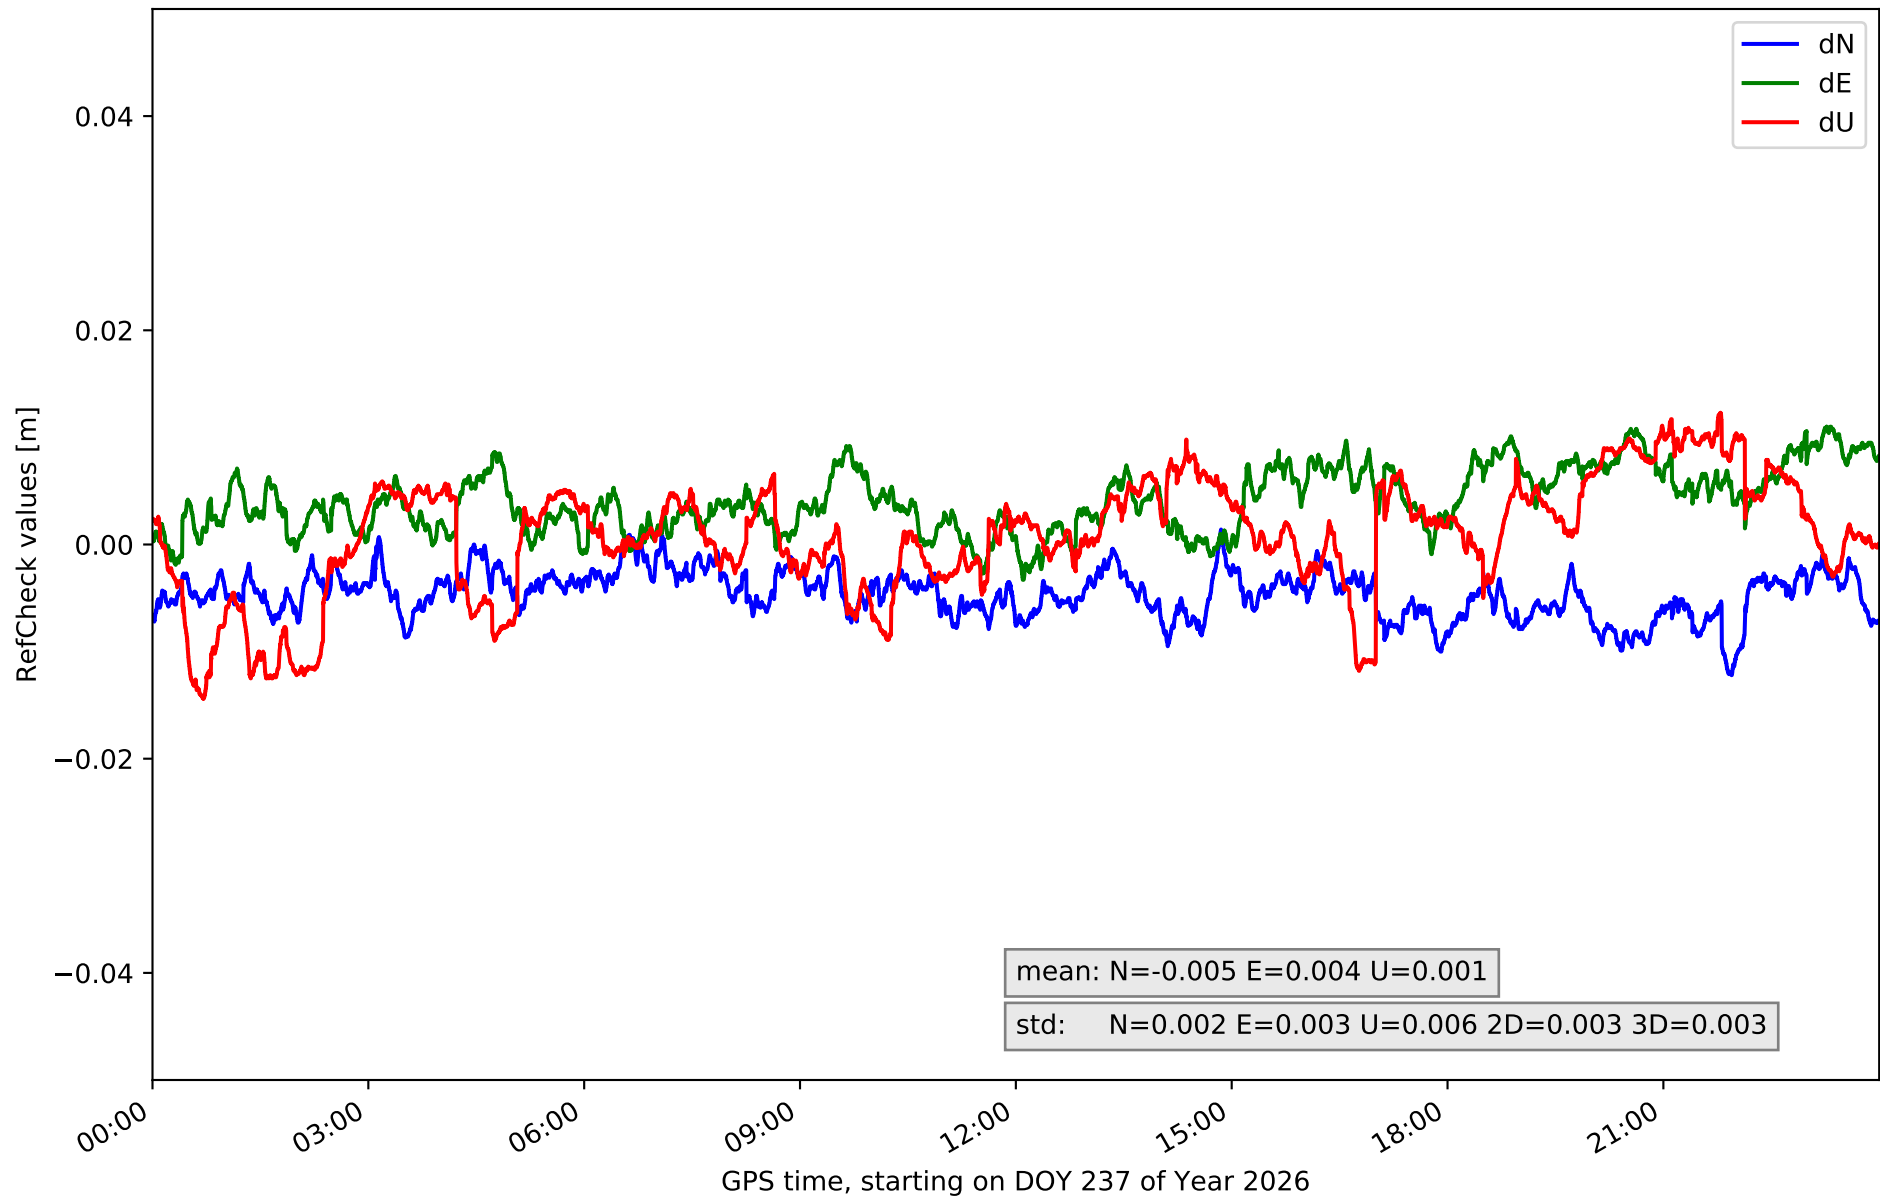


RefCheck for station LPAL in network N32T

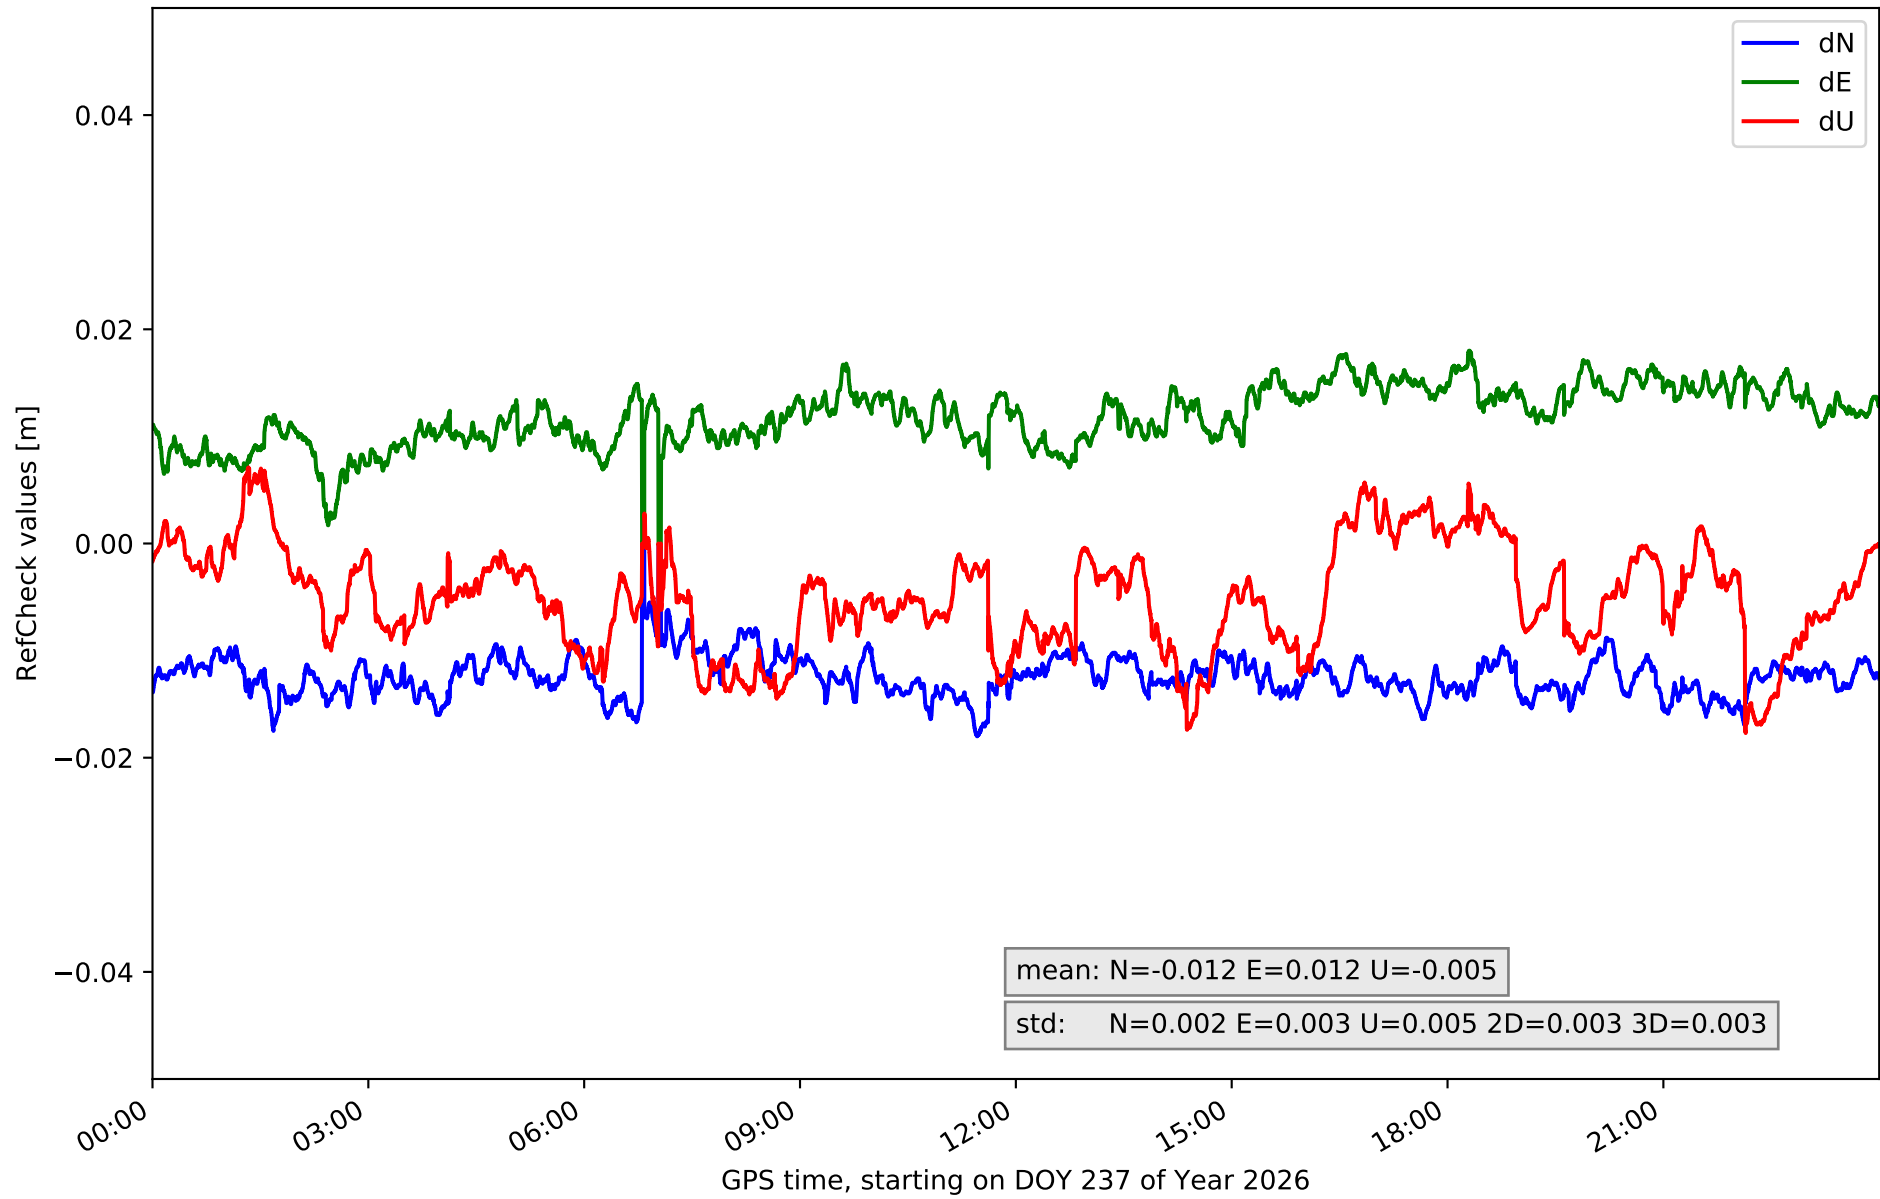


RefCheck for station LRES in network N32T

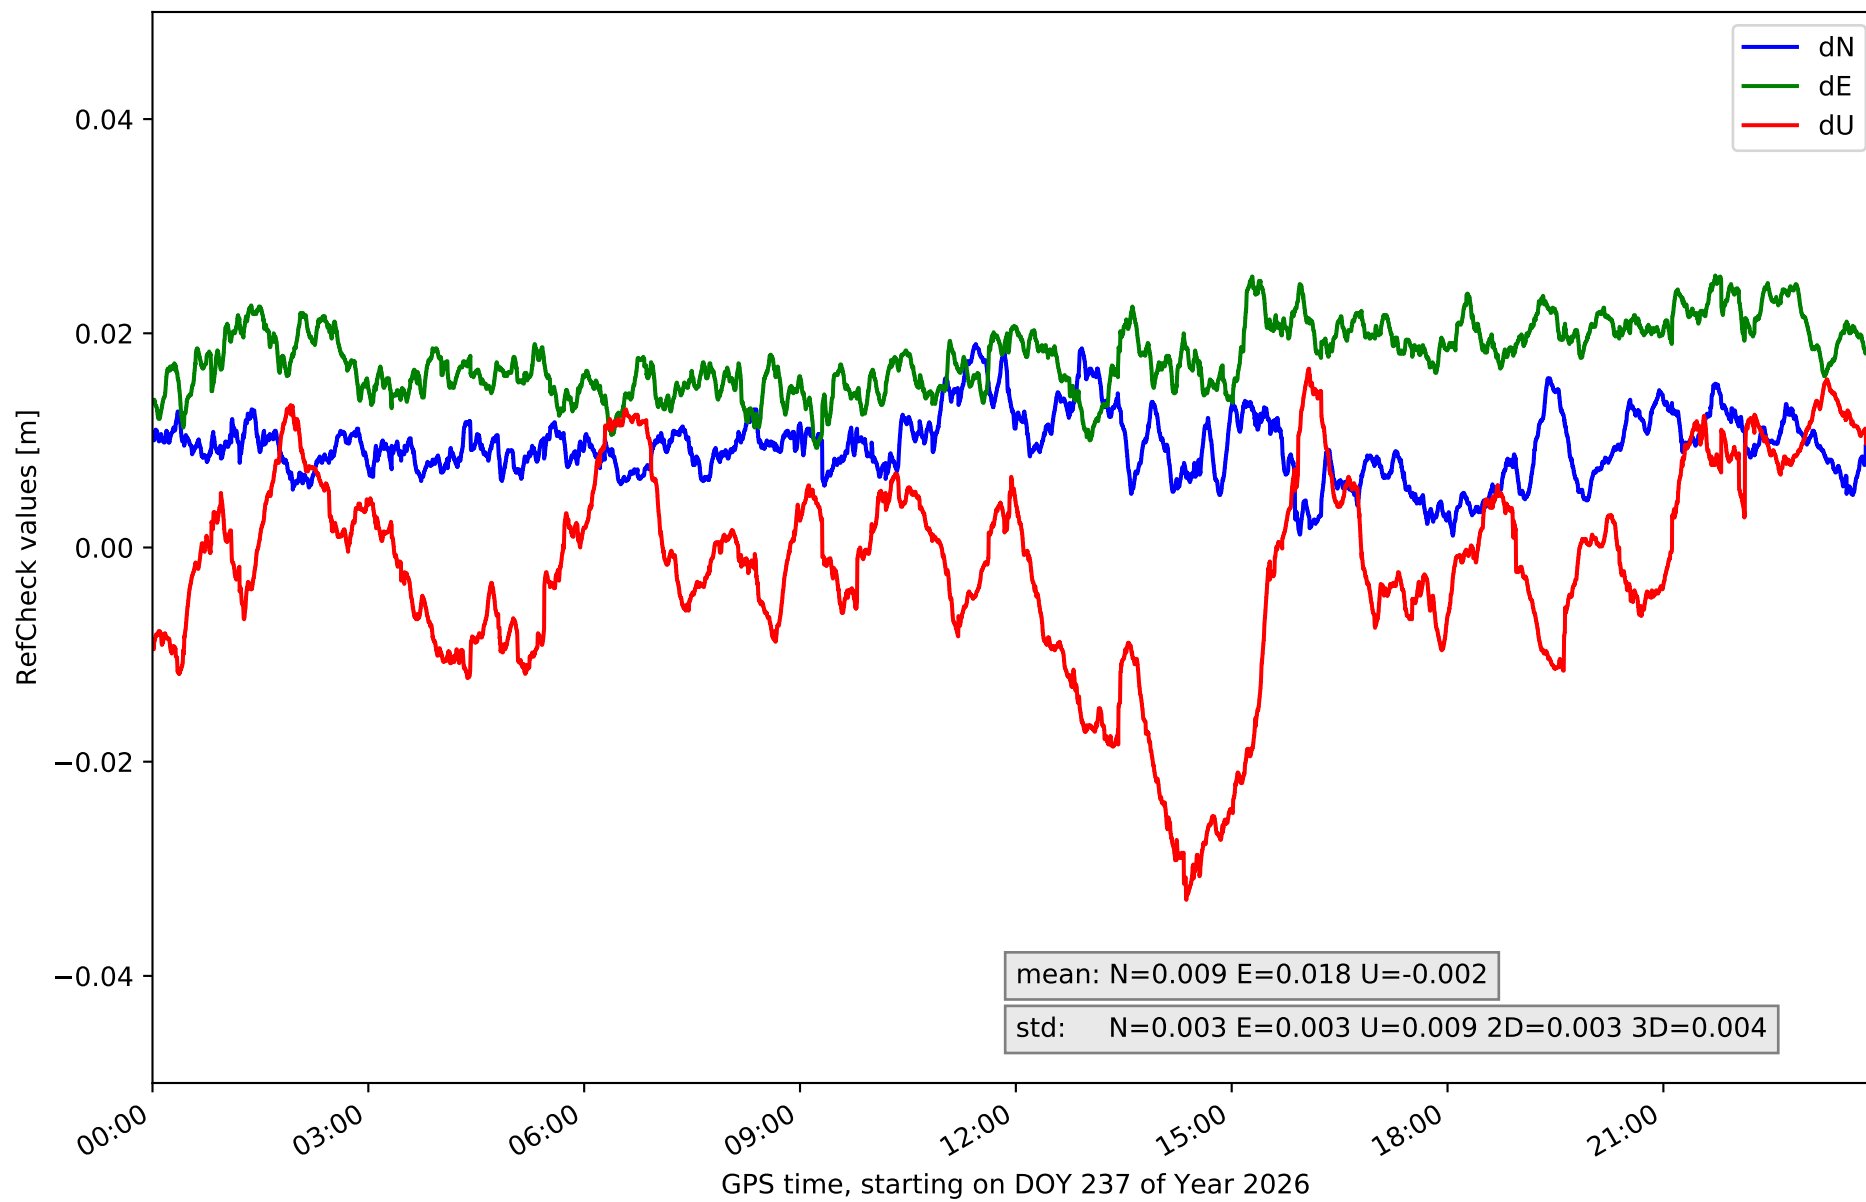


RefCheck for station TN01 in network N32T

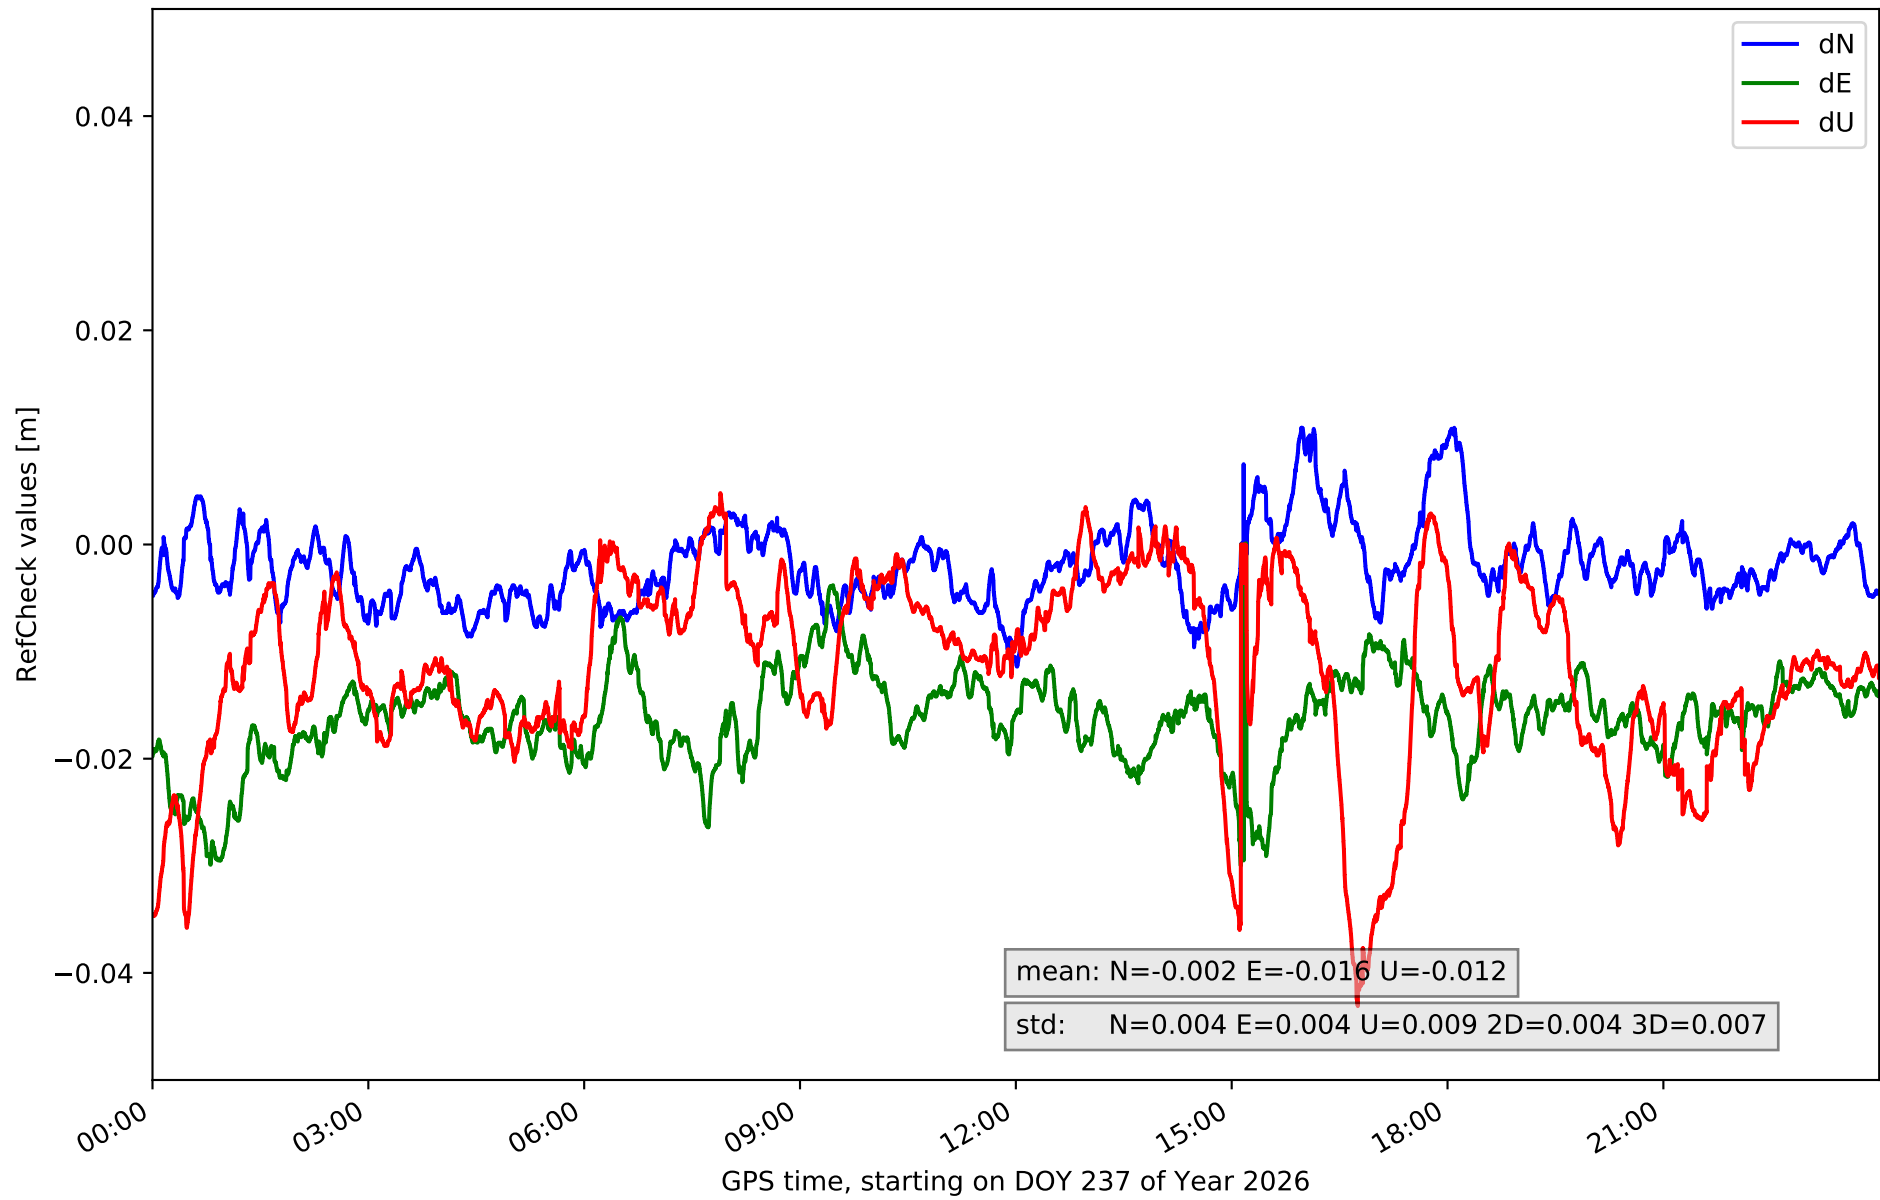


RefCheck for station TN02 in network N32T

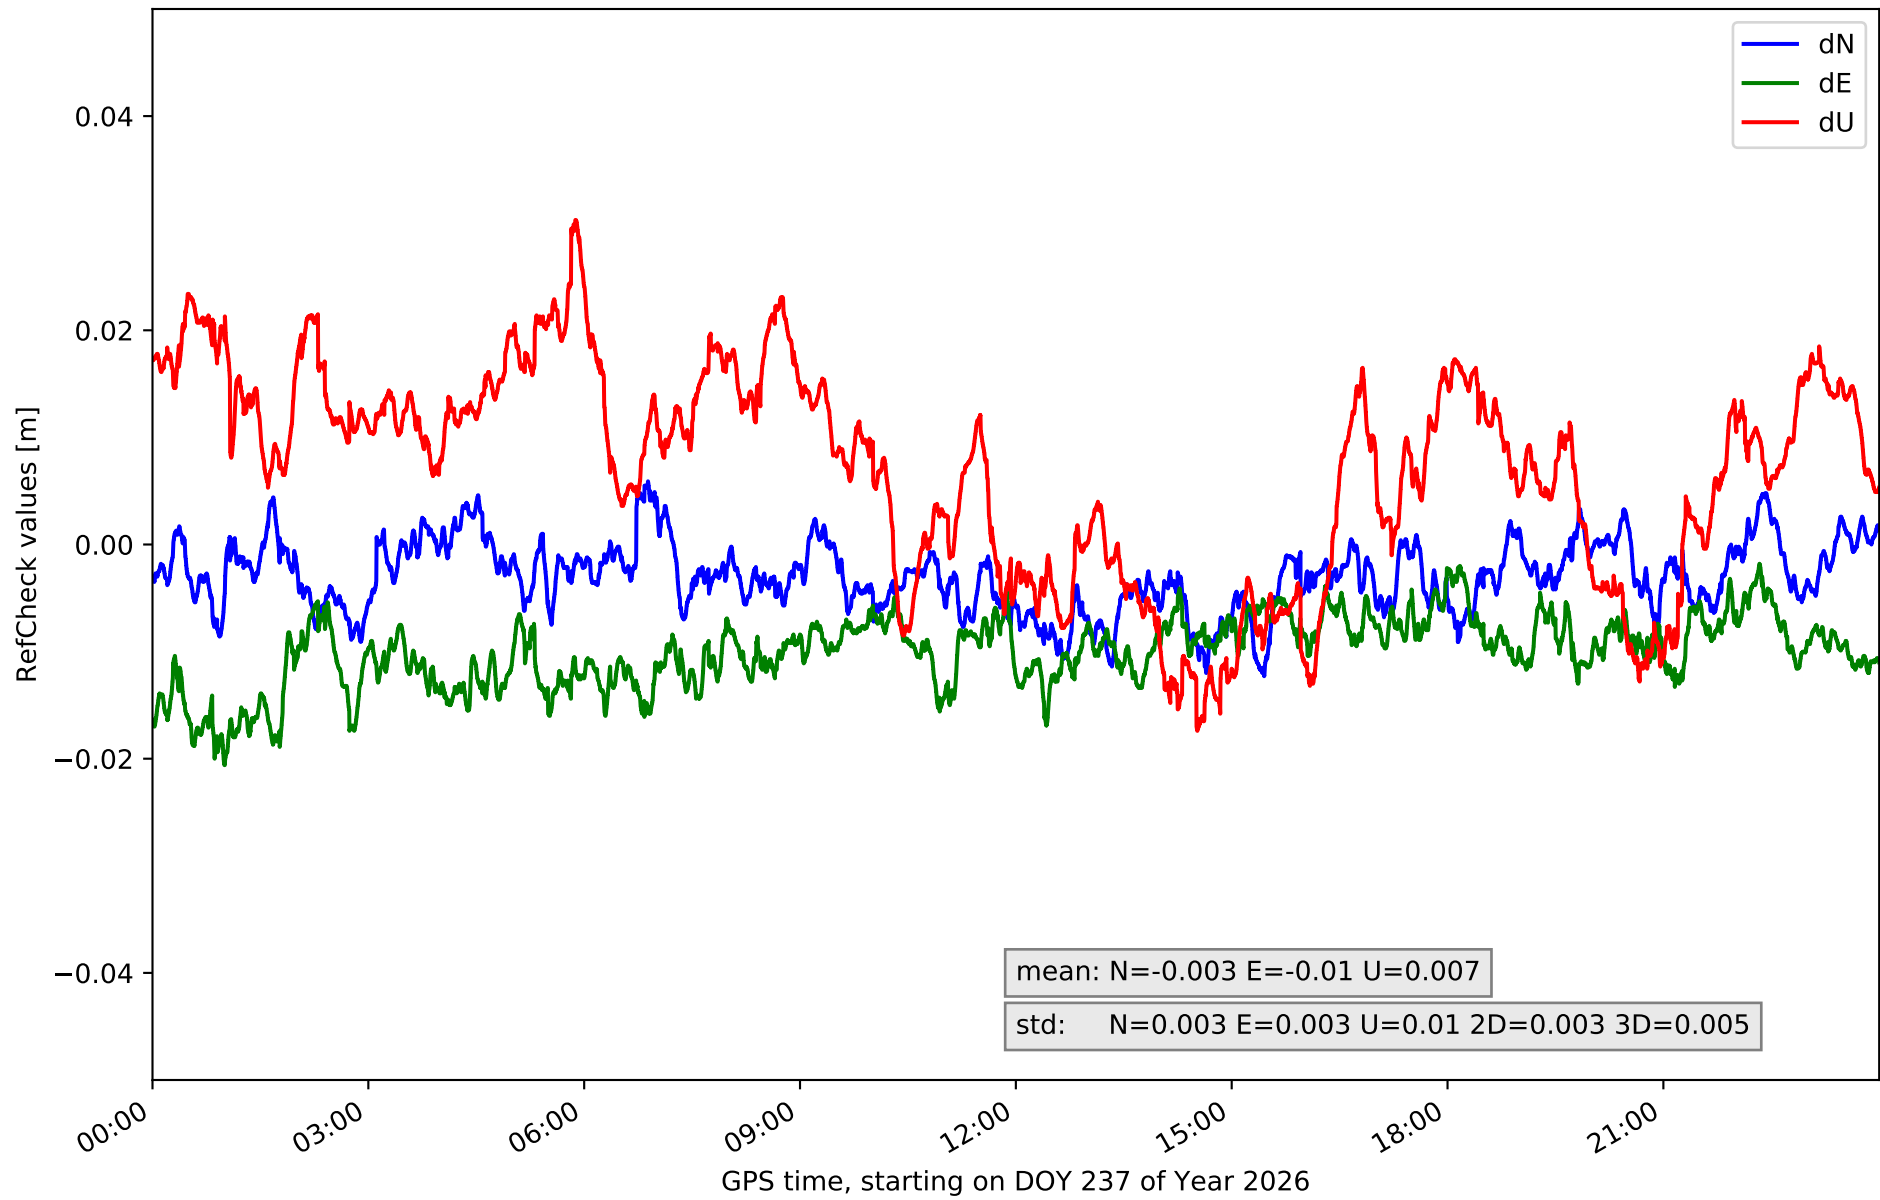


RefCheck for station TN03 in network N32T

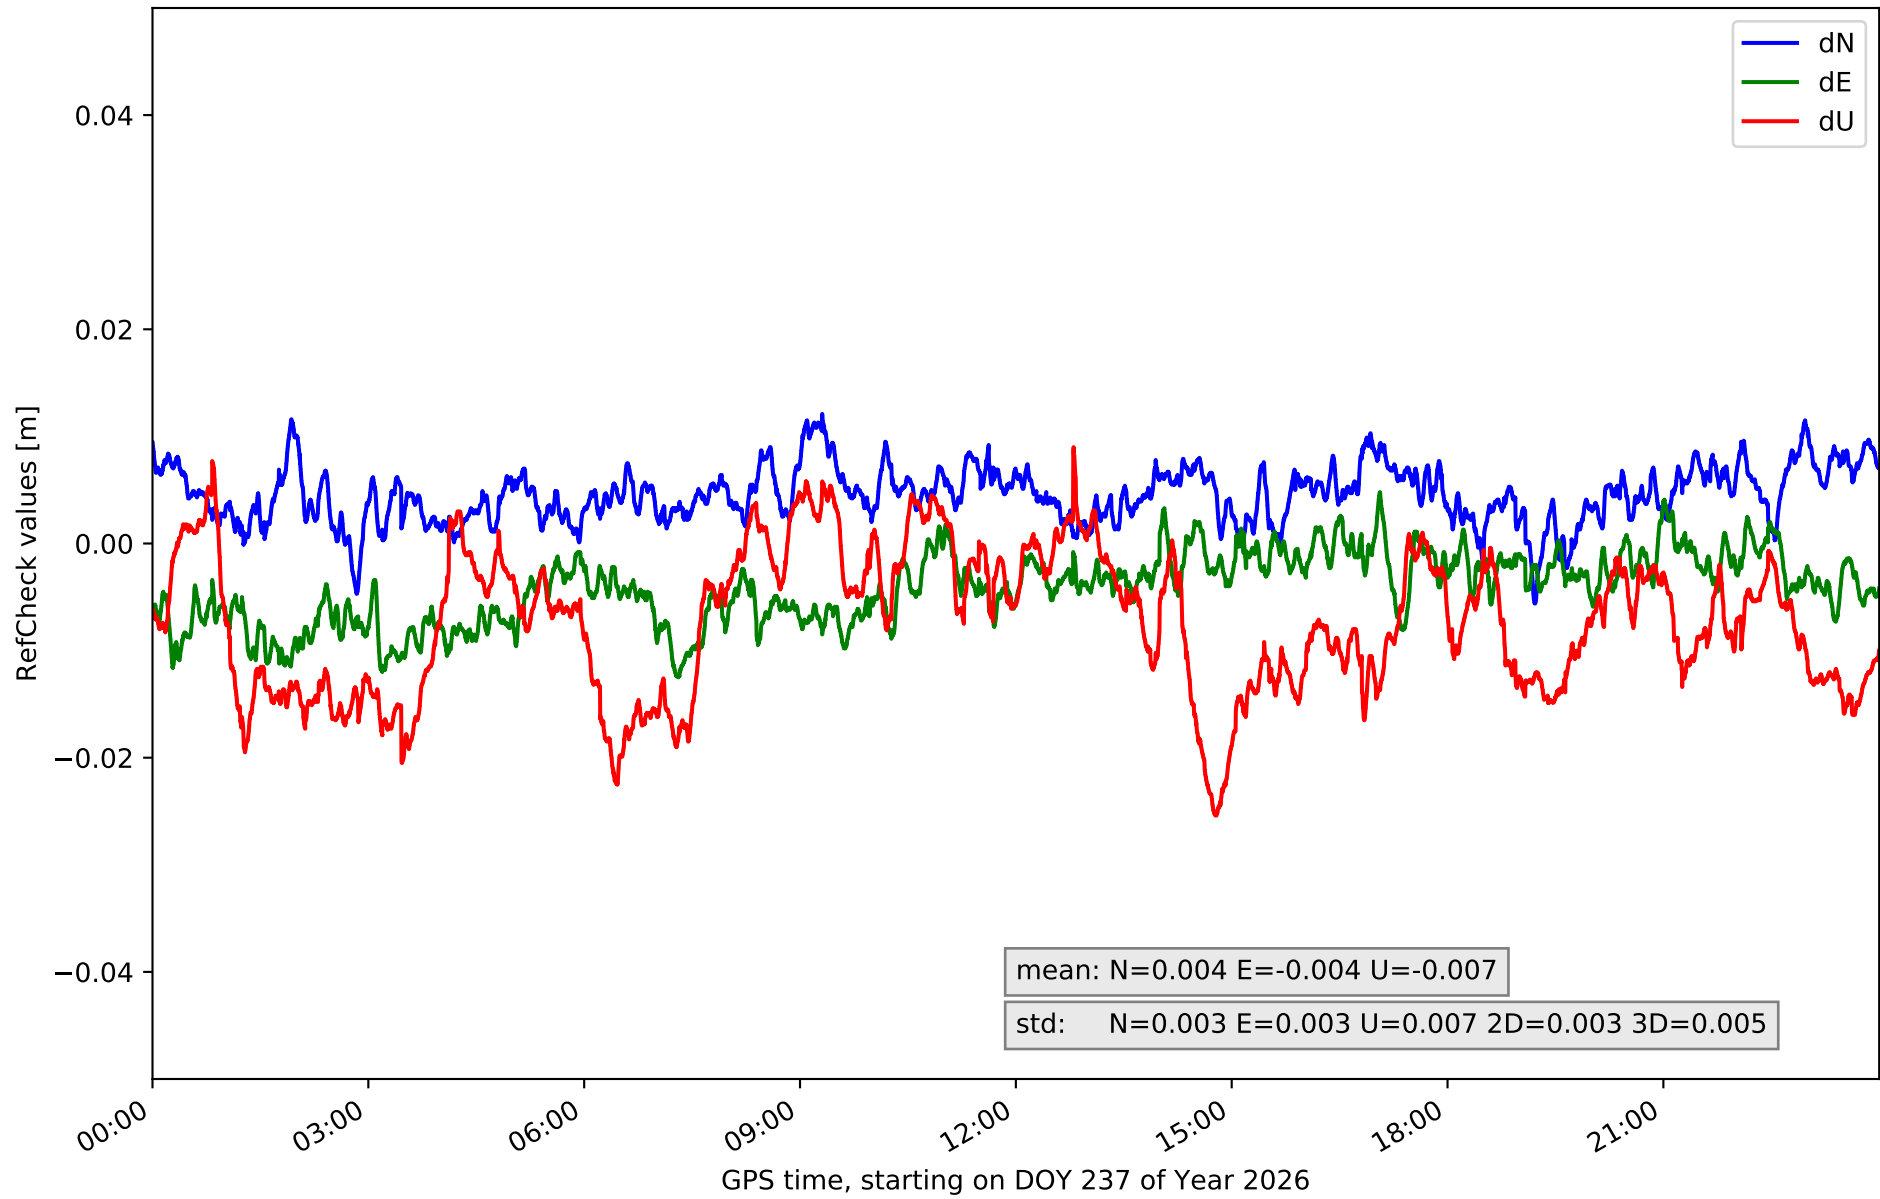


RefCheck for station TN06 in network N32T

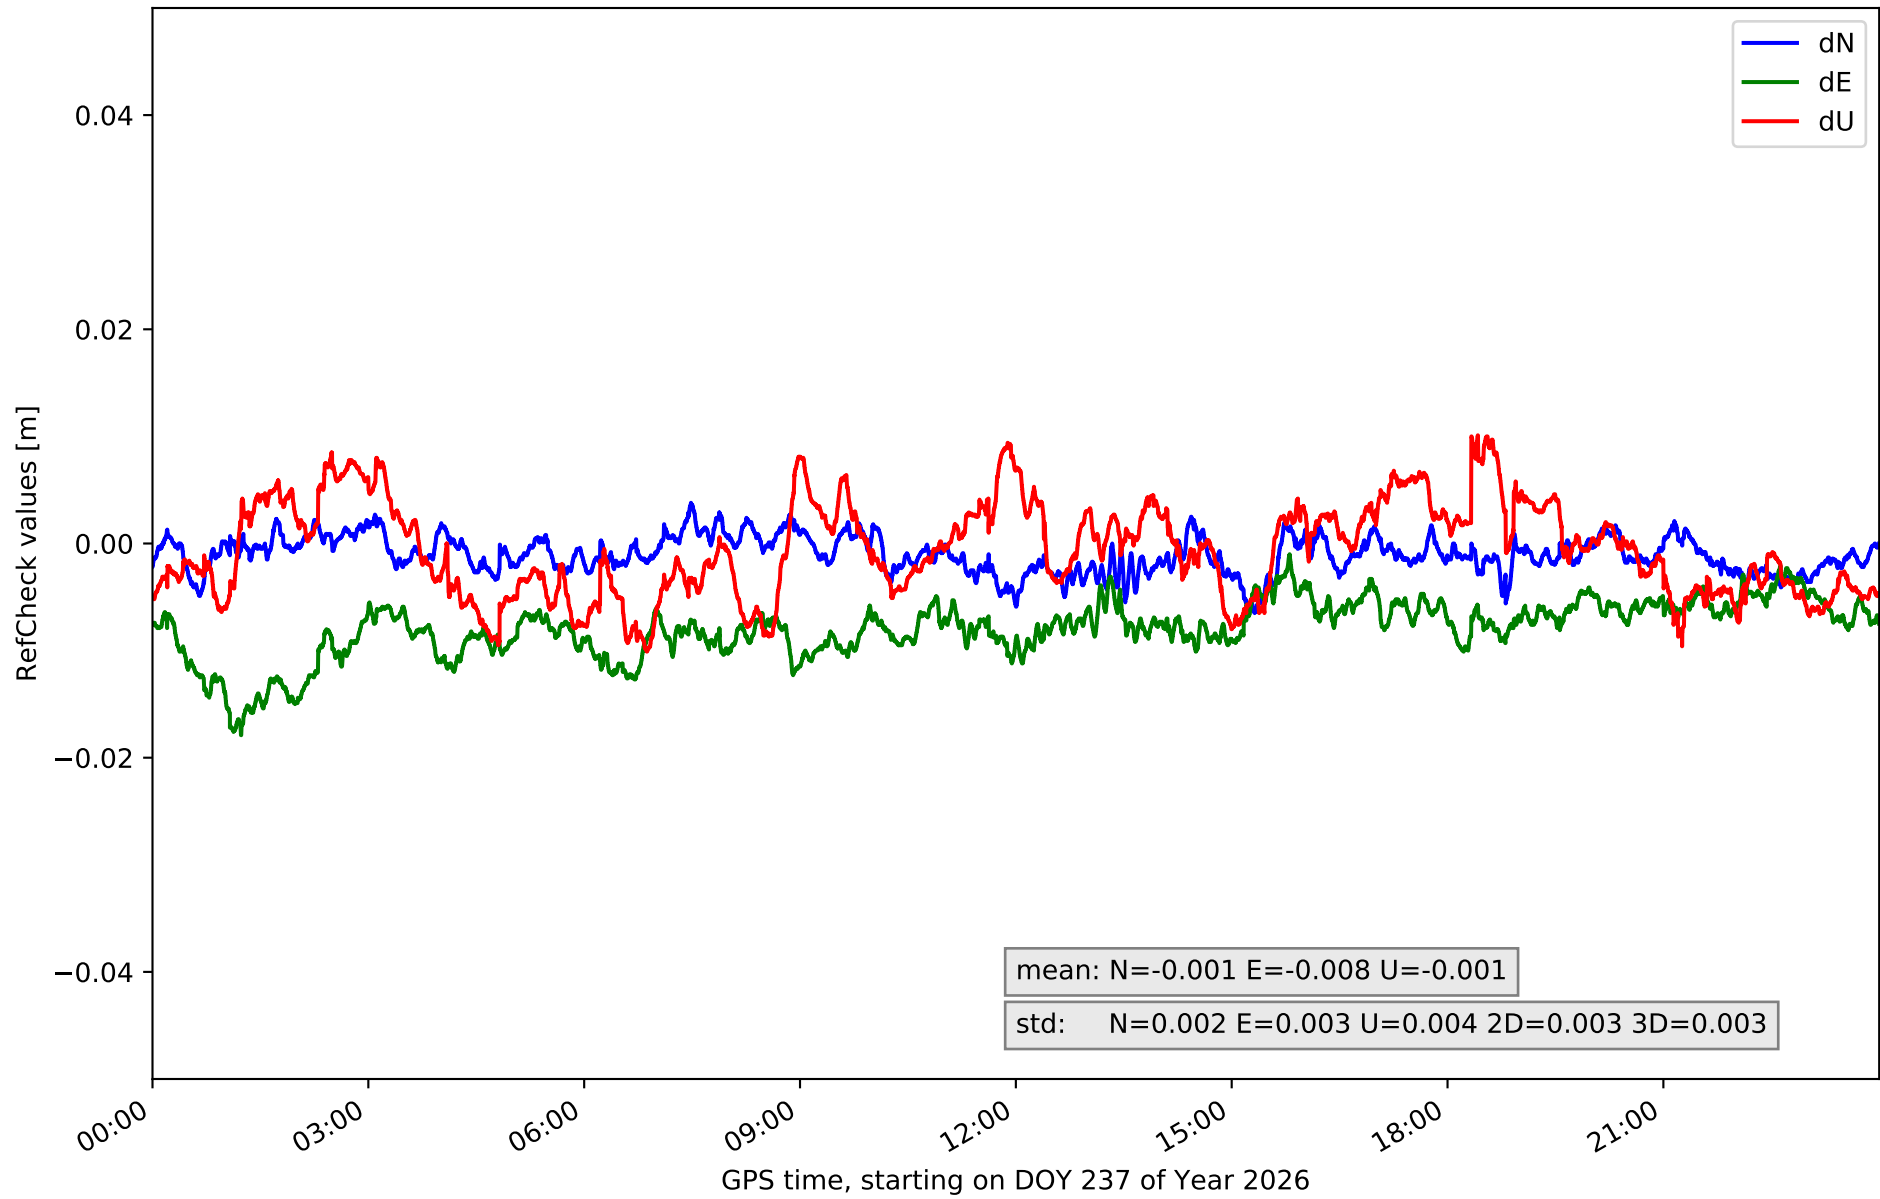

RefCheck for station TN09 in network N32T

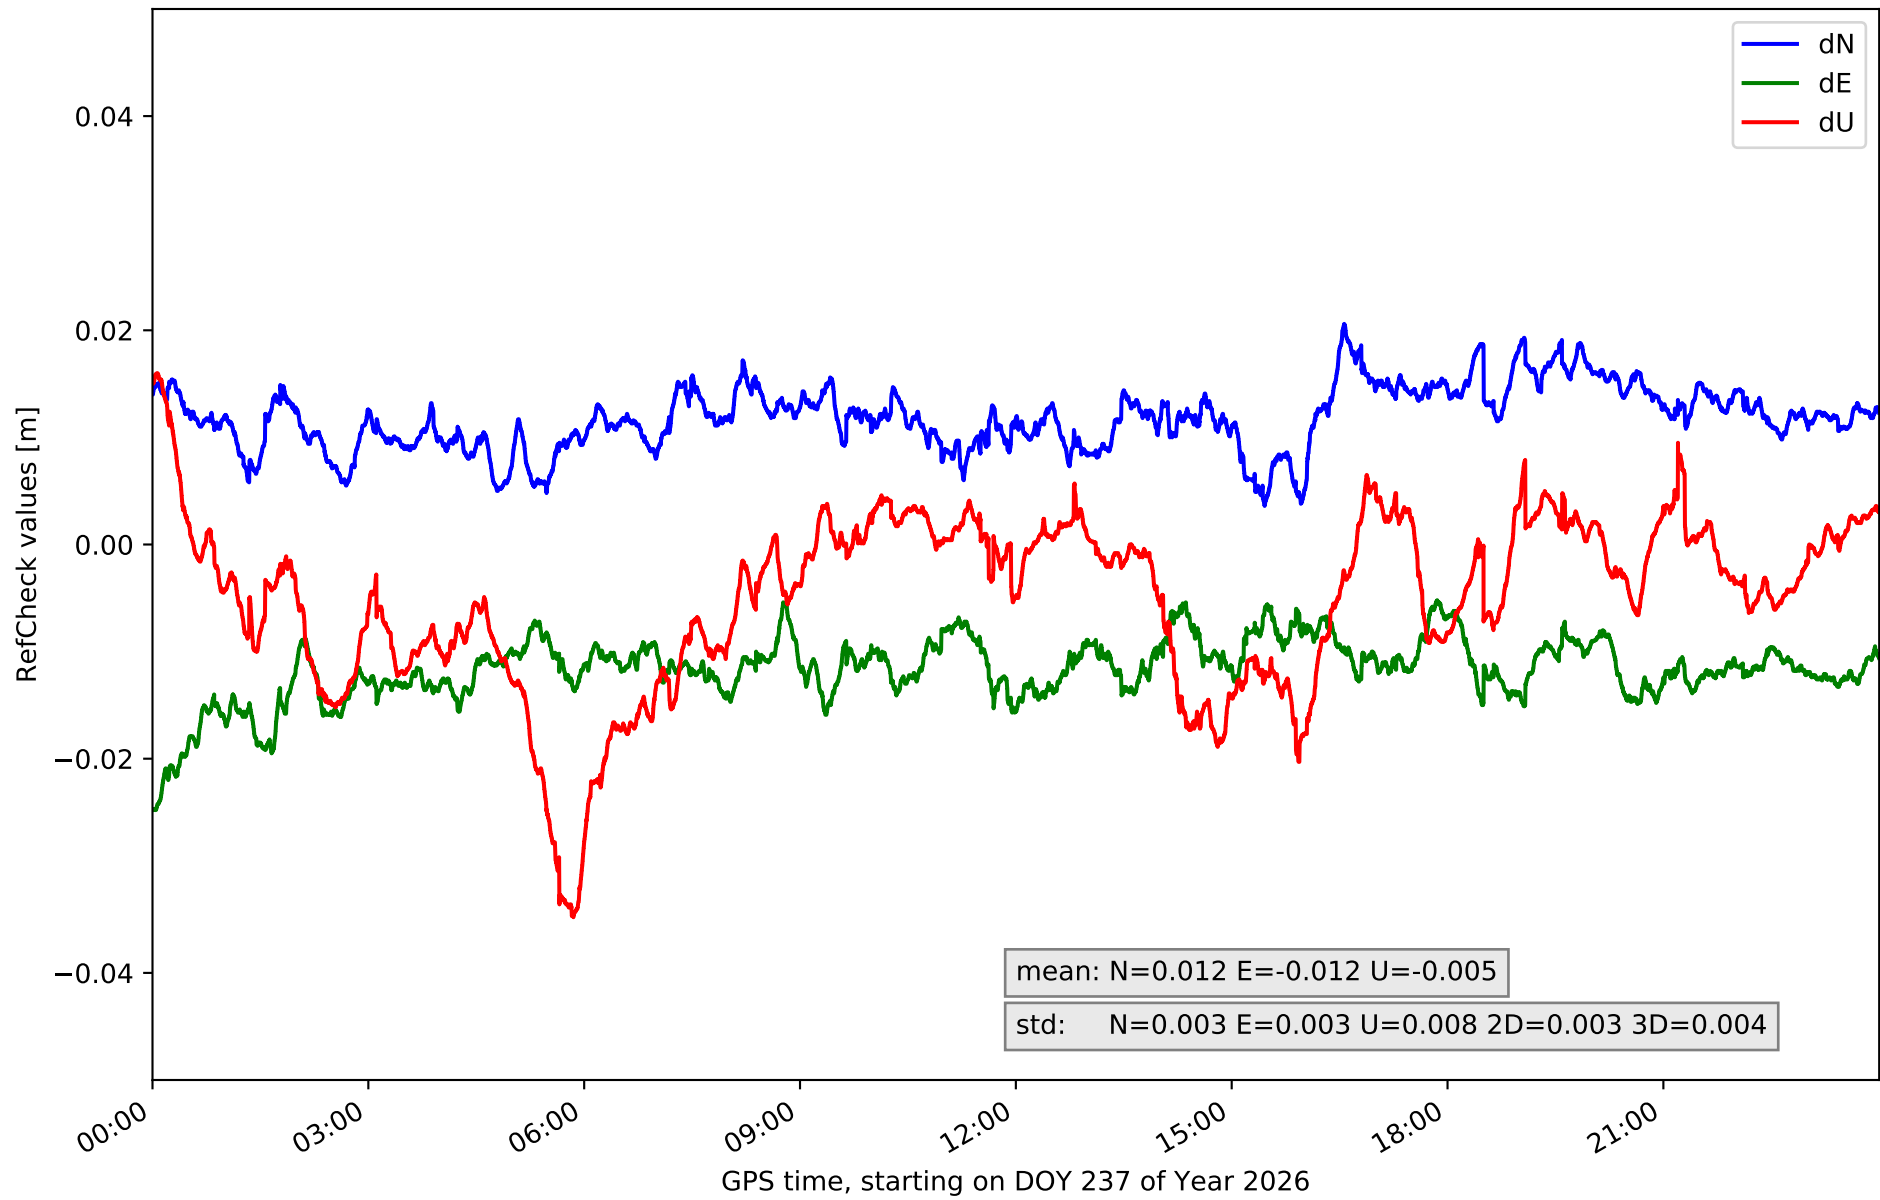

RefCheck for station TE11 in network N32T

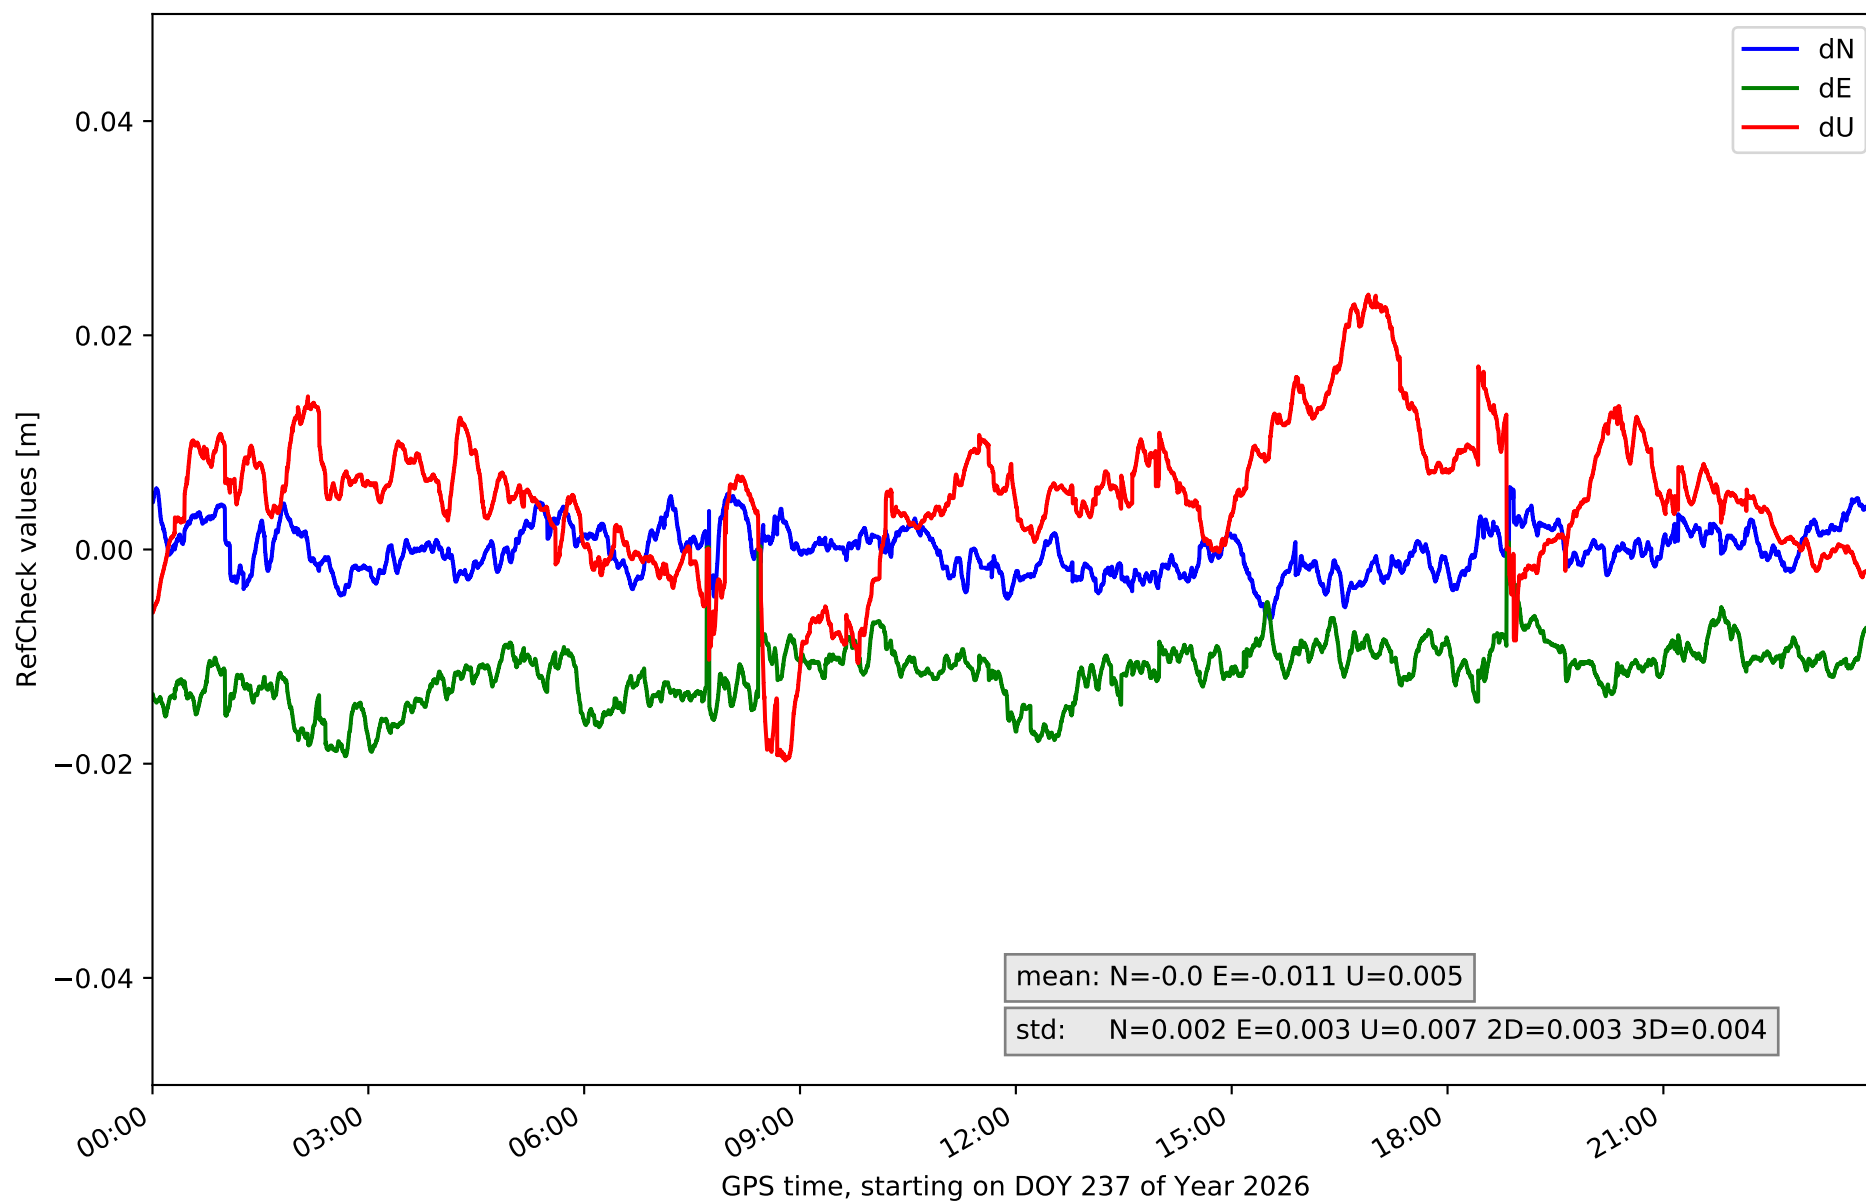

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.004	0.015	0.003	0.005	0.028	0.004	-0.013	0.028	0.008	0.004	0.004	61085	99.3	35015	56.9
EH02	-0.004	0.019	0.004	-0.0	0.029	0.003	-0.023	0.023	0.007	0.003	0.003	61410	99.8	46632	75.8
GOM1	-0.011	0.005	0.003	-0.023	-0.0	0.004	-0.034	0.018	0.01	0.004	0.006	49604	80.6	16968	27.6
GOME	-0.006	0.011	0.003	-0.009	0.015	0.004	-0.01	0.045	0.009	0.003	0.008	3230	5.3	6407	10.4
IZAN	-0.008	0.008	0.003	-0.024	-0.001	0.004	-0.02	0.023	0.009	0.004	0.004	41472	67.4	10482	17.0
LP01	-0.02	-0.006	0.002	-0.007	0.016	0.004	-0.006	0.03	0.007	0.003	0.004	57286	93.1	20231	32.9
LP03	-0.012	0.001	0.002	-0.003	0.011	0.003	-0.014	0.012	0.006	0.003	0.003	6609	10.7	0	0.0
LPAL	-0.018	-0.0	0.002	-0.001	0.018	0.003	-0.018	0.007	0.005	0.003	0.003	61357	99.7	19736	32.1
LRES	0.001	0.019	0.003	0.009	0.025	0.003	-0.033	0.017	0.009	0.003	0.004	61512	100.0	41204	67.0
TN01	-0.011	0.011	0.004	-0.03	0.0	0.004	-0.043	0.005	0.009	0.004	0.007	59576	96.9	32899	53.5
TN02	-0.012	0.006	0.003	-0.021	-0.002	0.003	-0.017	0.03	0.01	0.003	0.005	35679	58.0	11491	18.7
TN03	-0.006	0.012	0.003	-0.013	0.005	0.003	-0.025	0.009	0.007	0.003	0.005	8816	14.3	3419	5.6
TN06	-0.006	0.004	0.002	-0.018	-0.001	0.003	-0.01	0.01	0.004	0.003	0.003	12484	20.3	0	0.0
TN09	0.004	0.021	0.003	-0.025	-0.005	0.003	-0.035	0.016	0.008	0.003	0.004	59928	97.4	18198	29.6
TE11	-0.006	0.006	0.002	-0.019	0.001	0.003	-0.02	0.024	0.007	0.003	0.004	45938	74.7	4185	6.8
Mean	-0.008	0.009	0.003	-0.012	0.009	0.003	-0.021	0.02	0.008	0.003	0.004	41732.4	67.8	17791.1	28.9
Min/Max	-0.02	0.021	0.004	-0.03	0.029	0.004	-0.043	0.045	0.01	0.004	0.008	61512	100.0	46632	75.8

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	95.0	95.2	94.6	94.6	95.4
considering satellites with dual-frequency fixed	93.9	93.9	93.3	93.7	94.6
considering all signals separately	93.9	93.9	93.3	93.9	94.4