

summary for network NT32

timeperiod chosen: from 2026-08-28-00:00:00 until 2026-08-28-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.1 seconds


average fixing percentage with threshold set to 0.3: 94.5 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

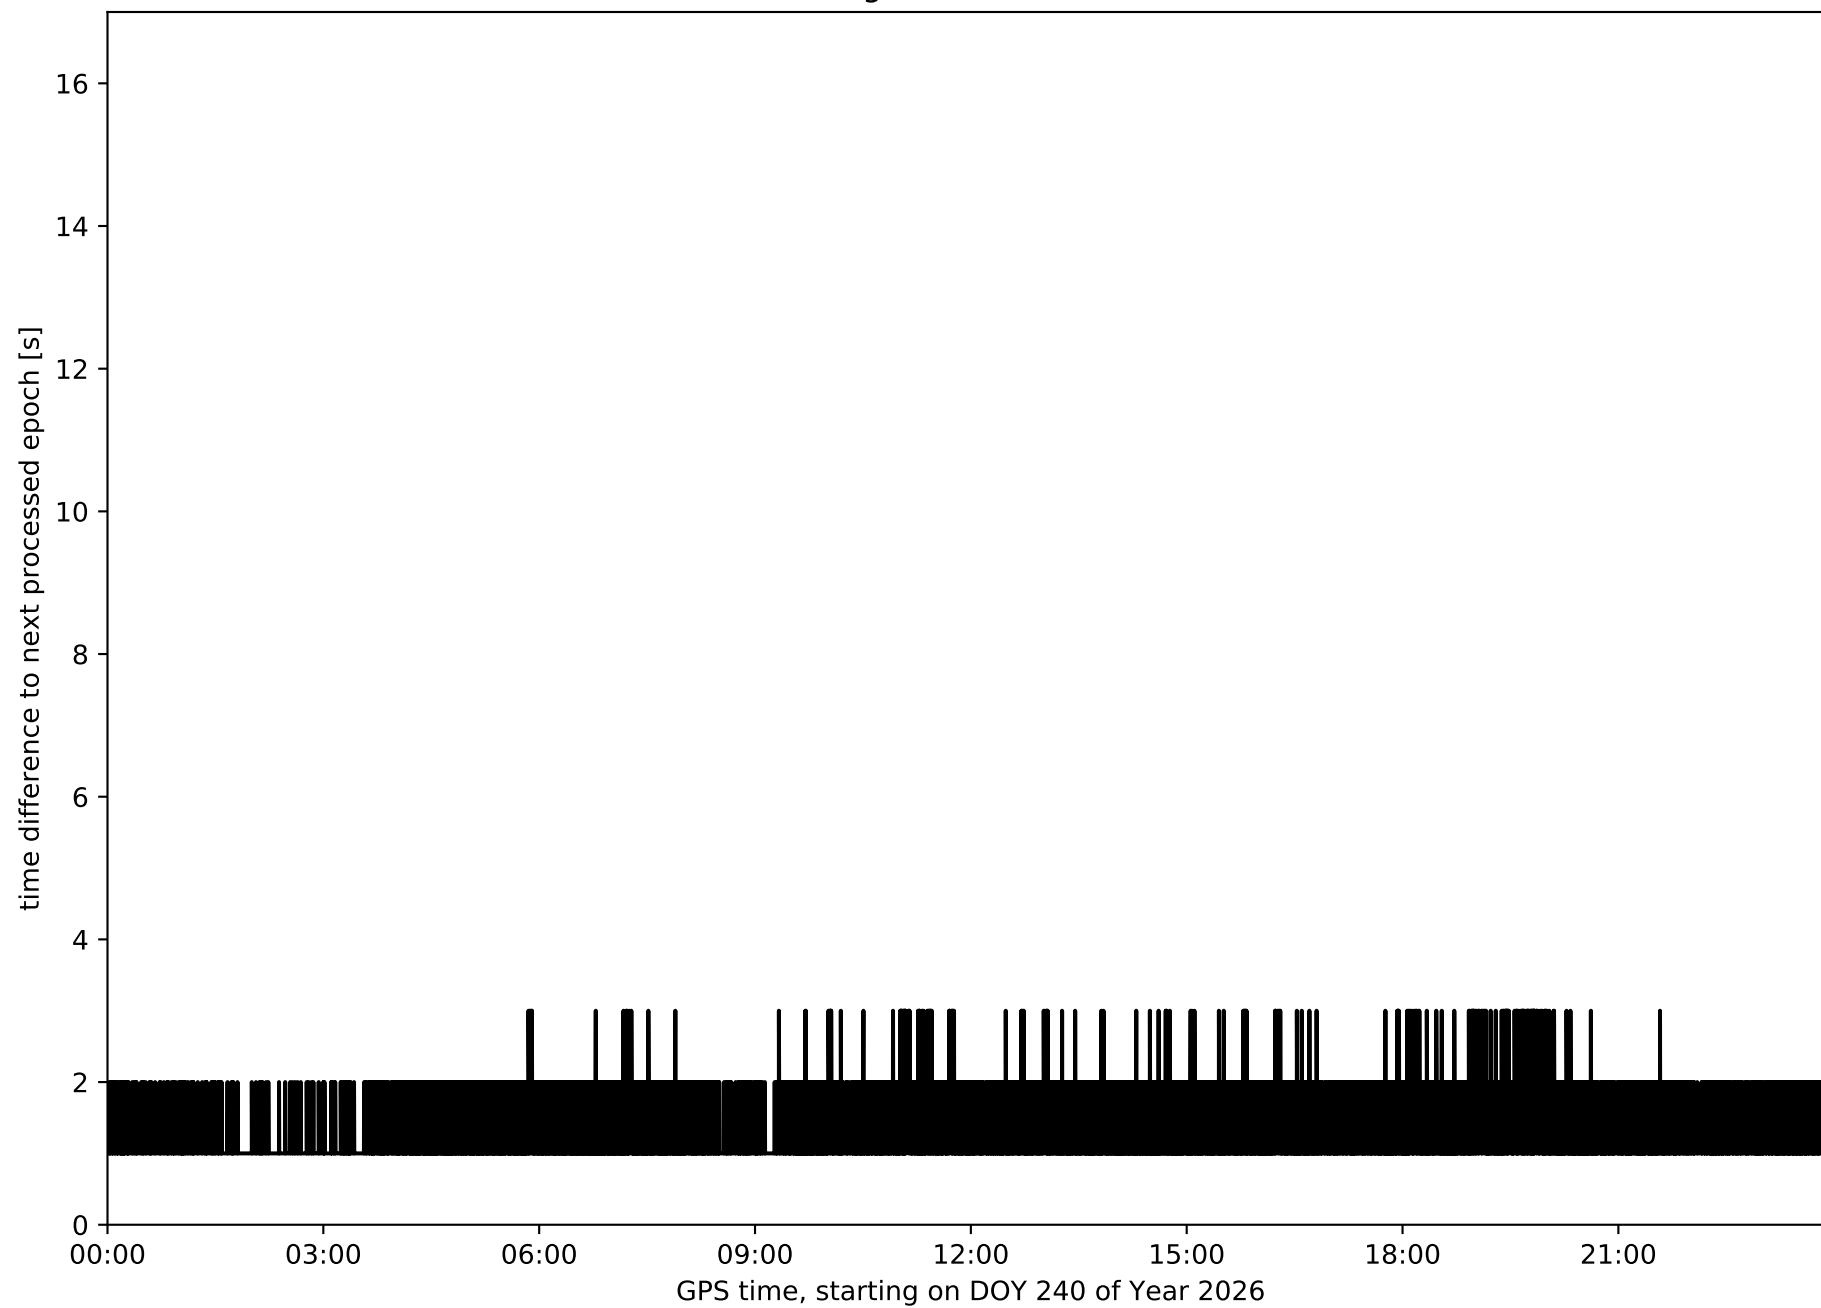


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

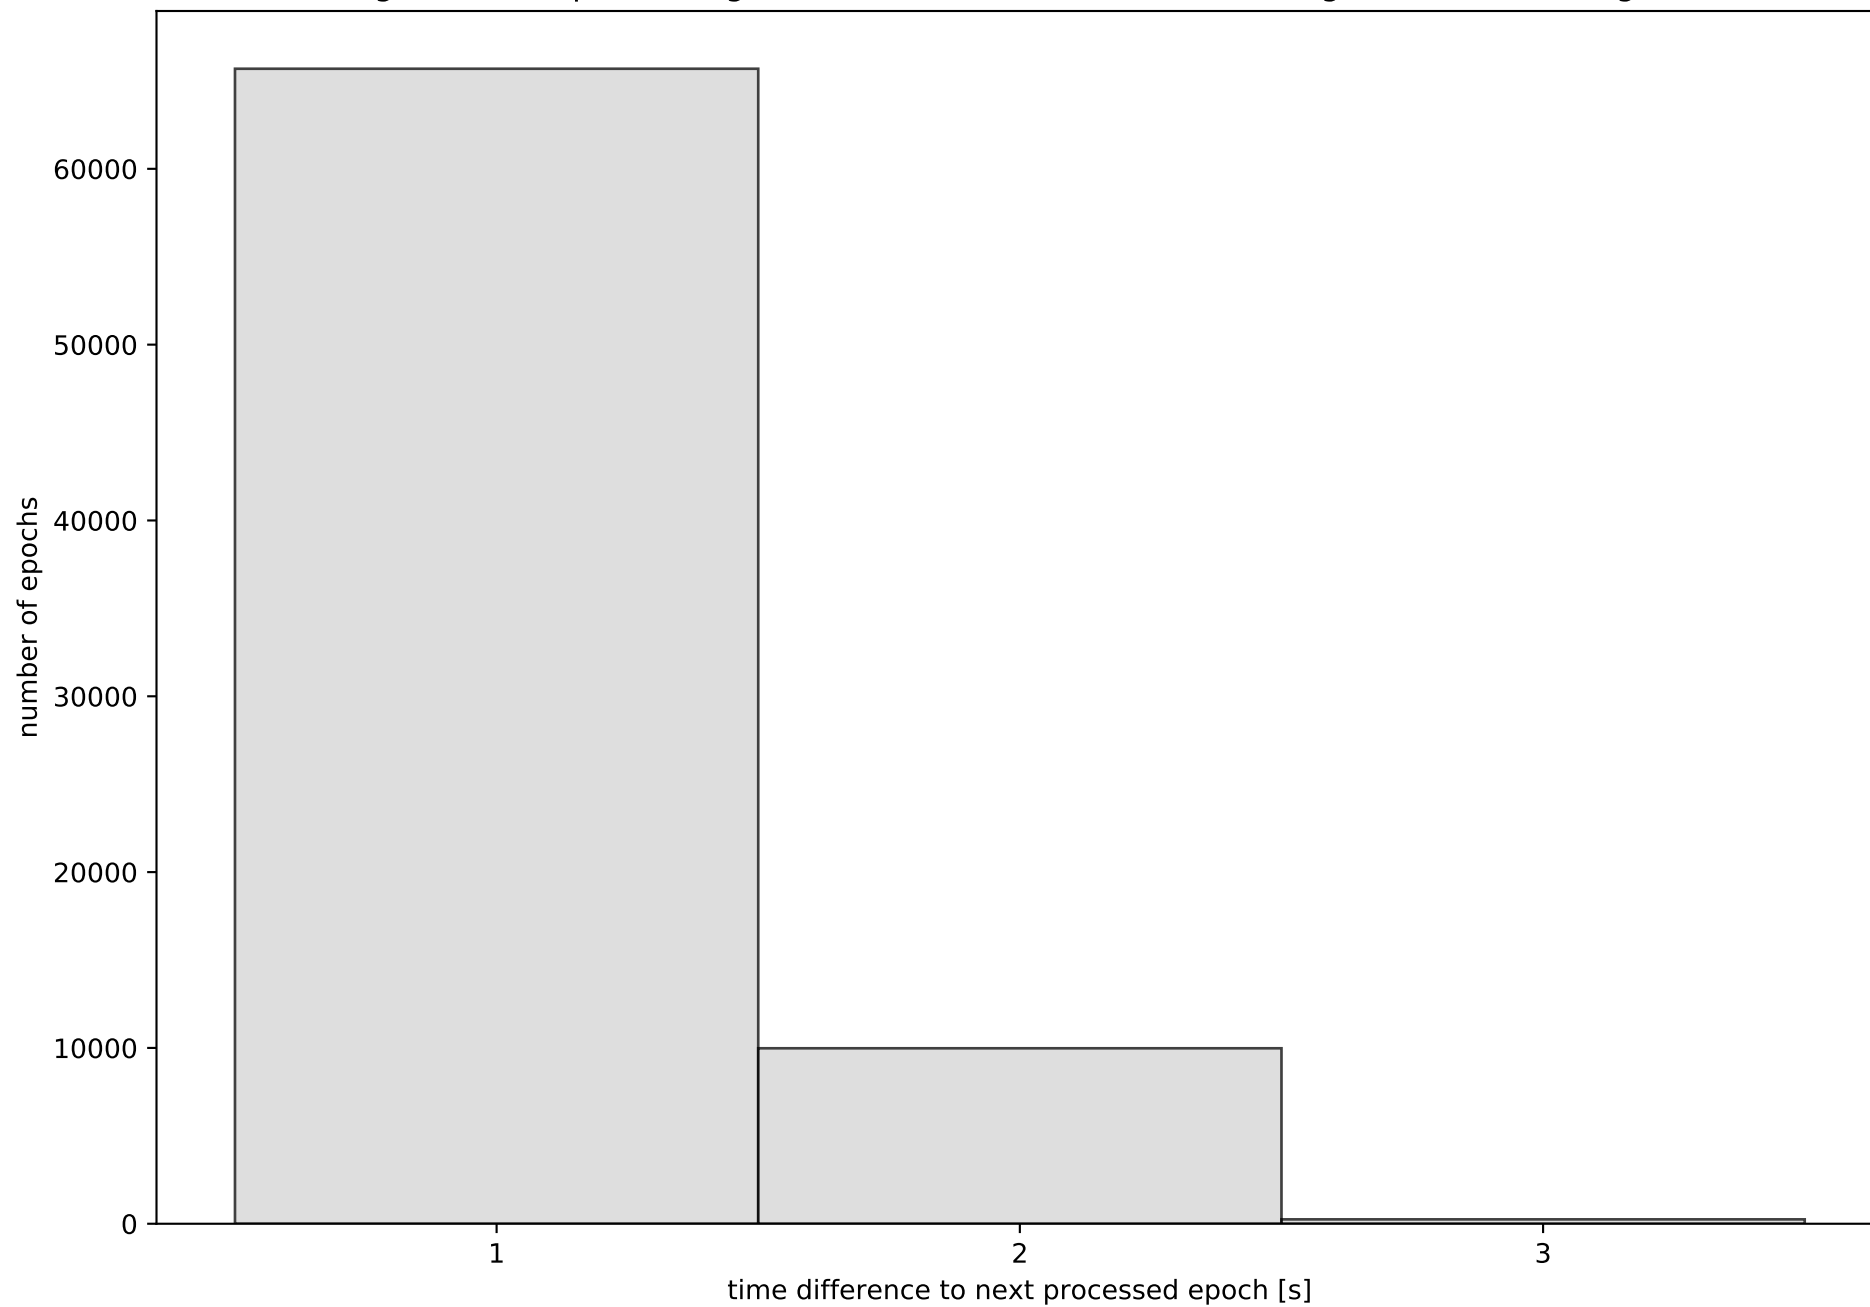


Network NT32 with threshold set to 0.3

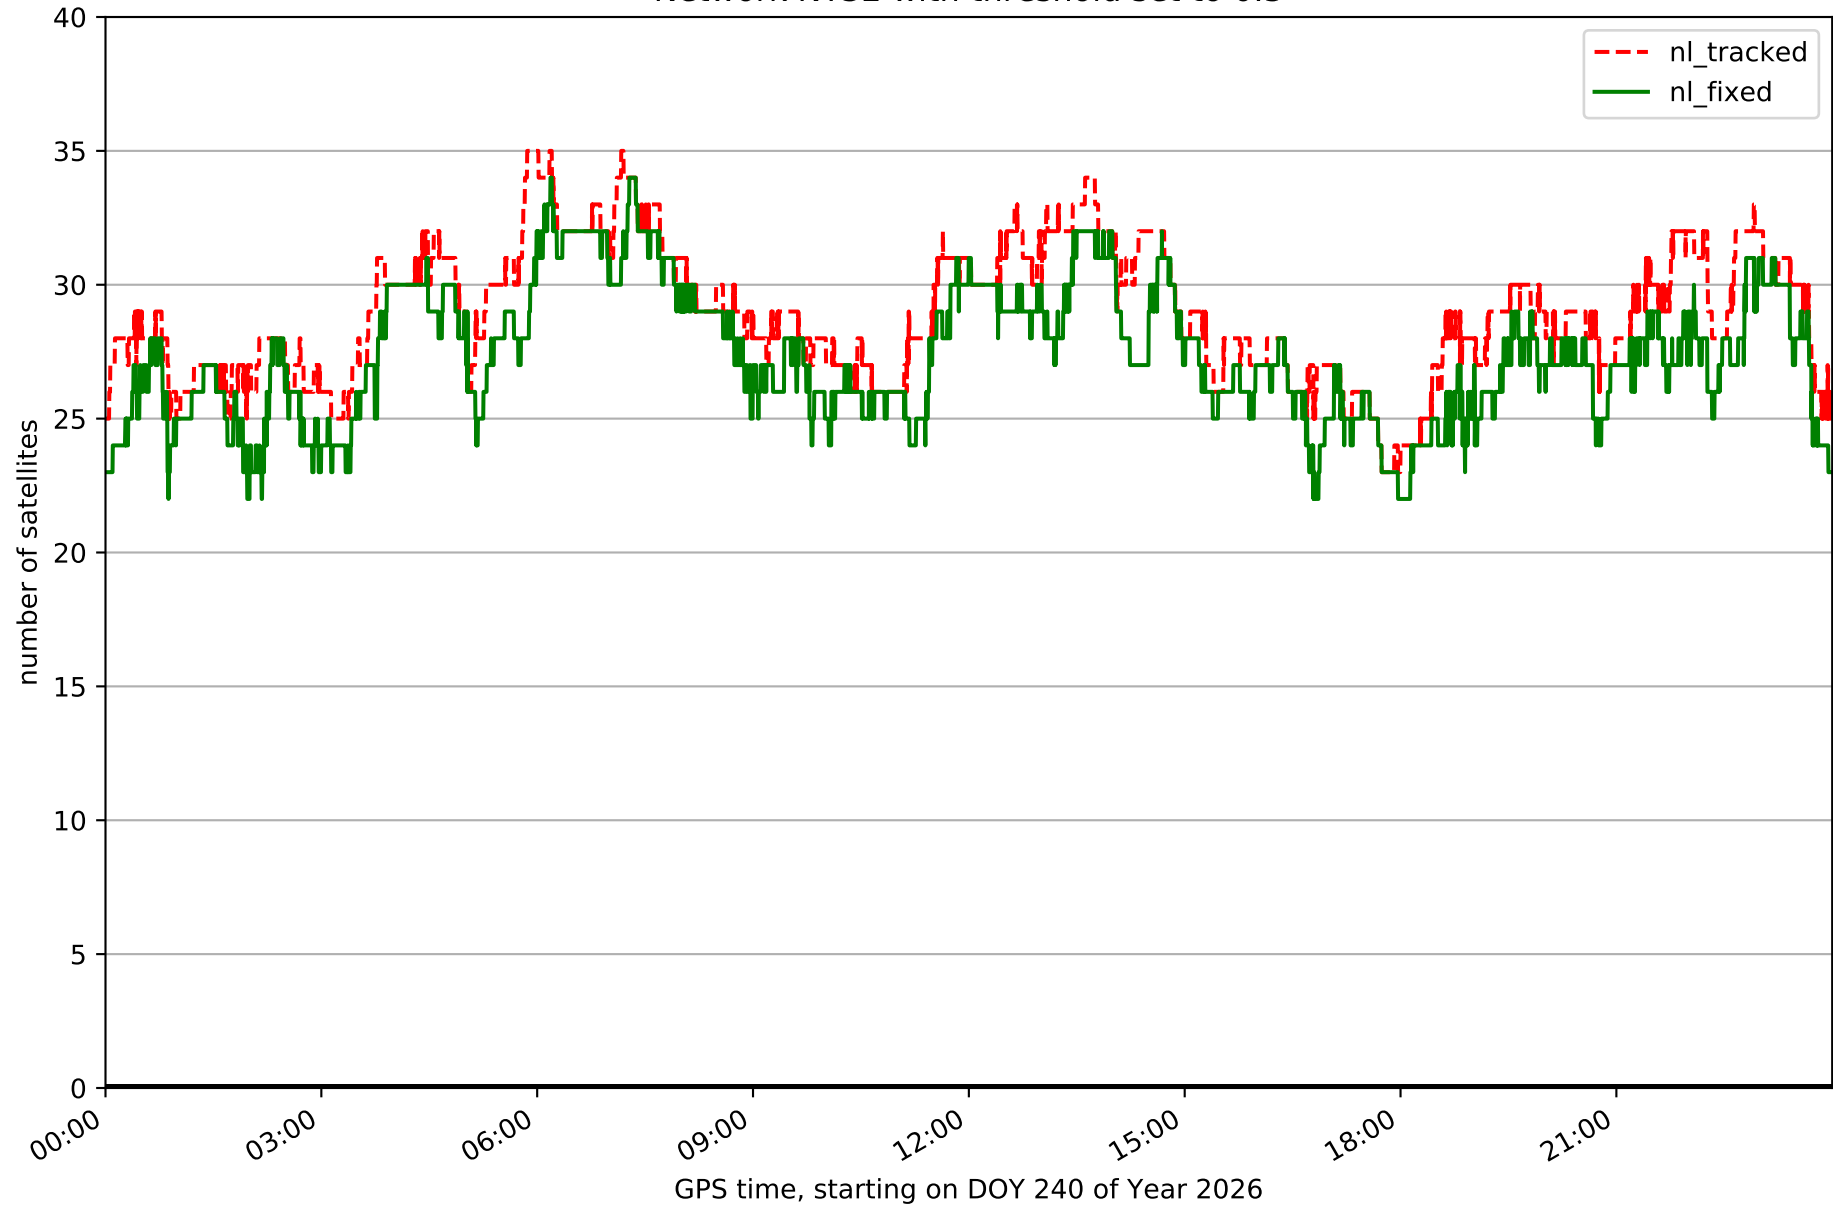


Fixing percentage of satellites in network NT32 with threshold set to 0.3

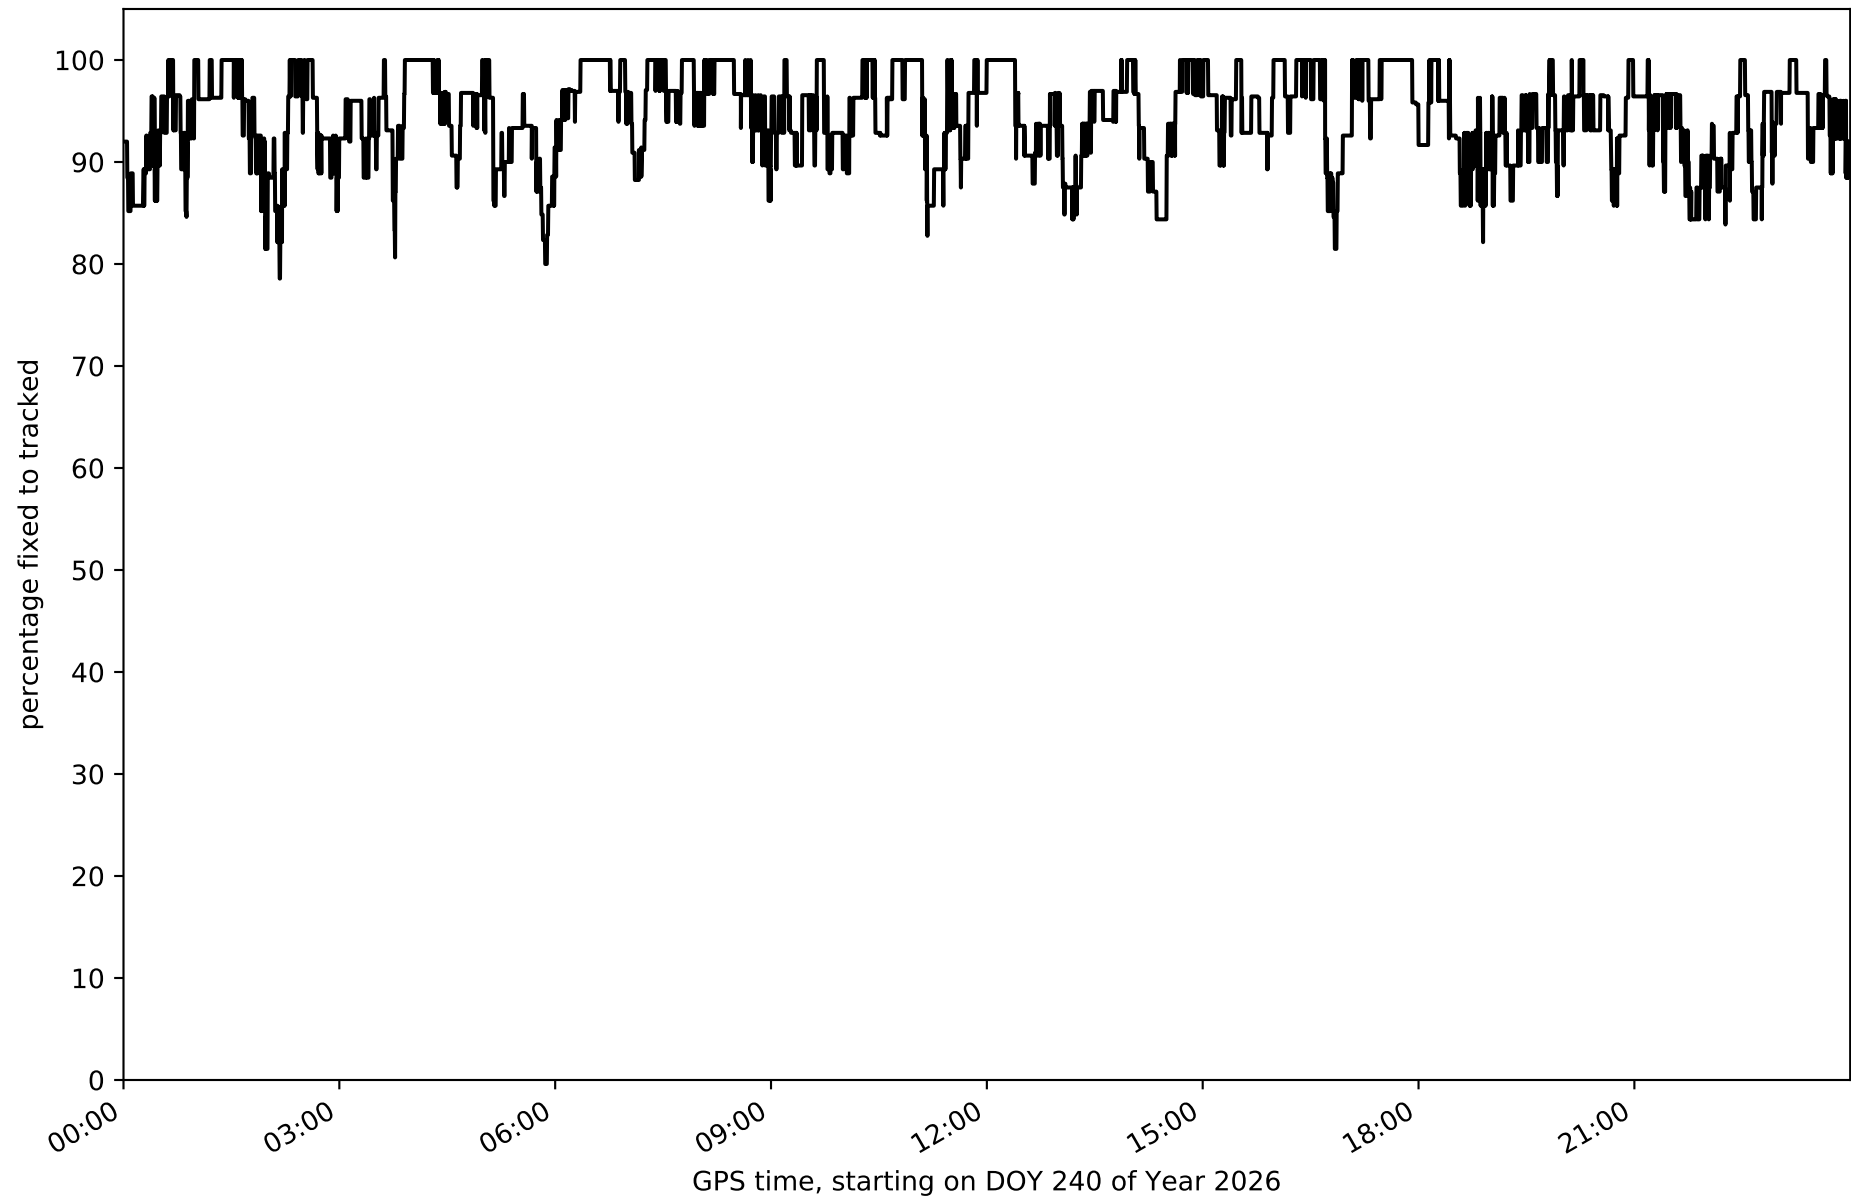


Network NT32 - only GPS with threshold set to 0.3

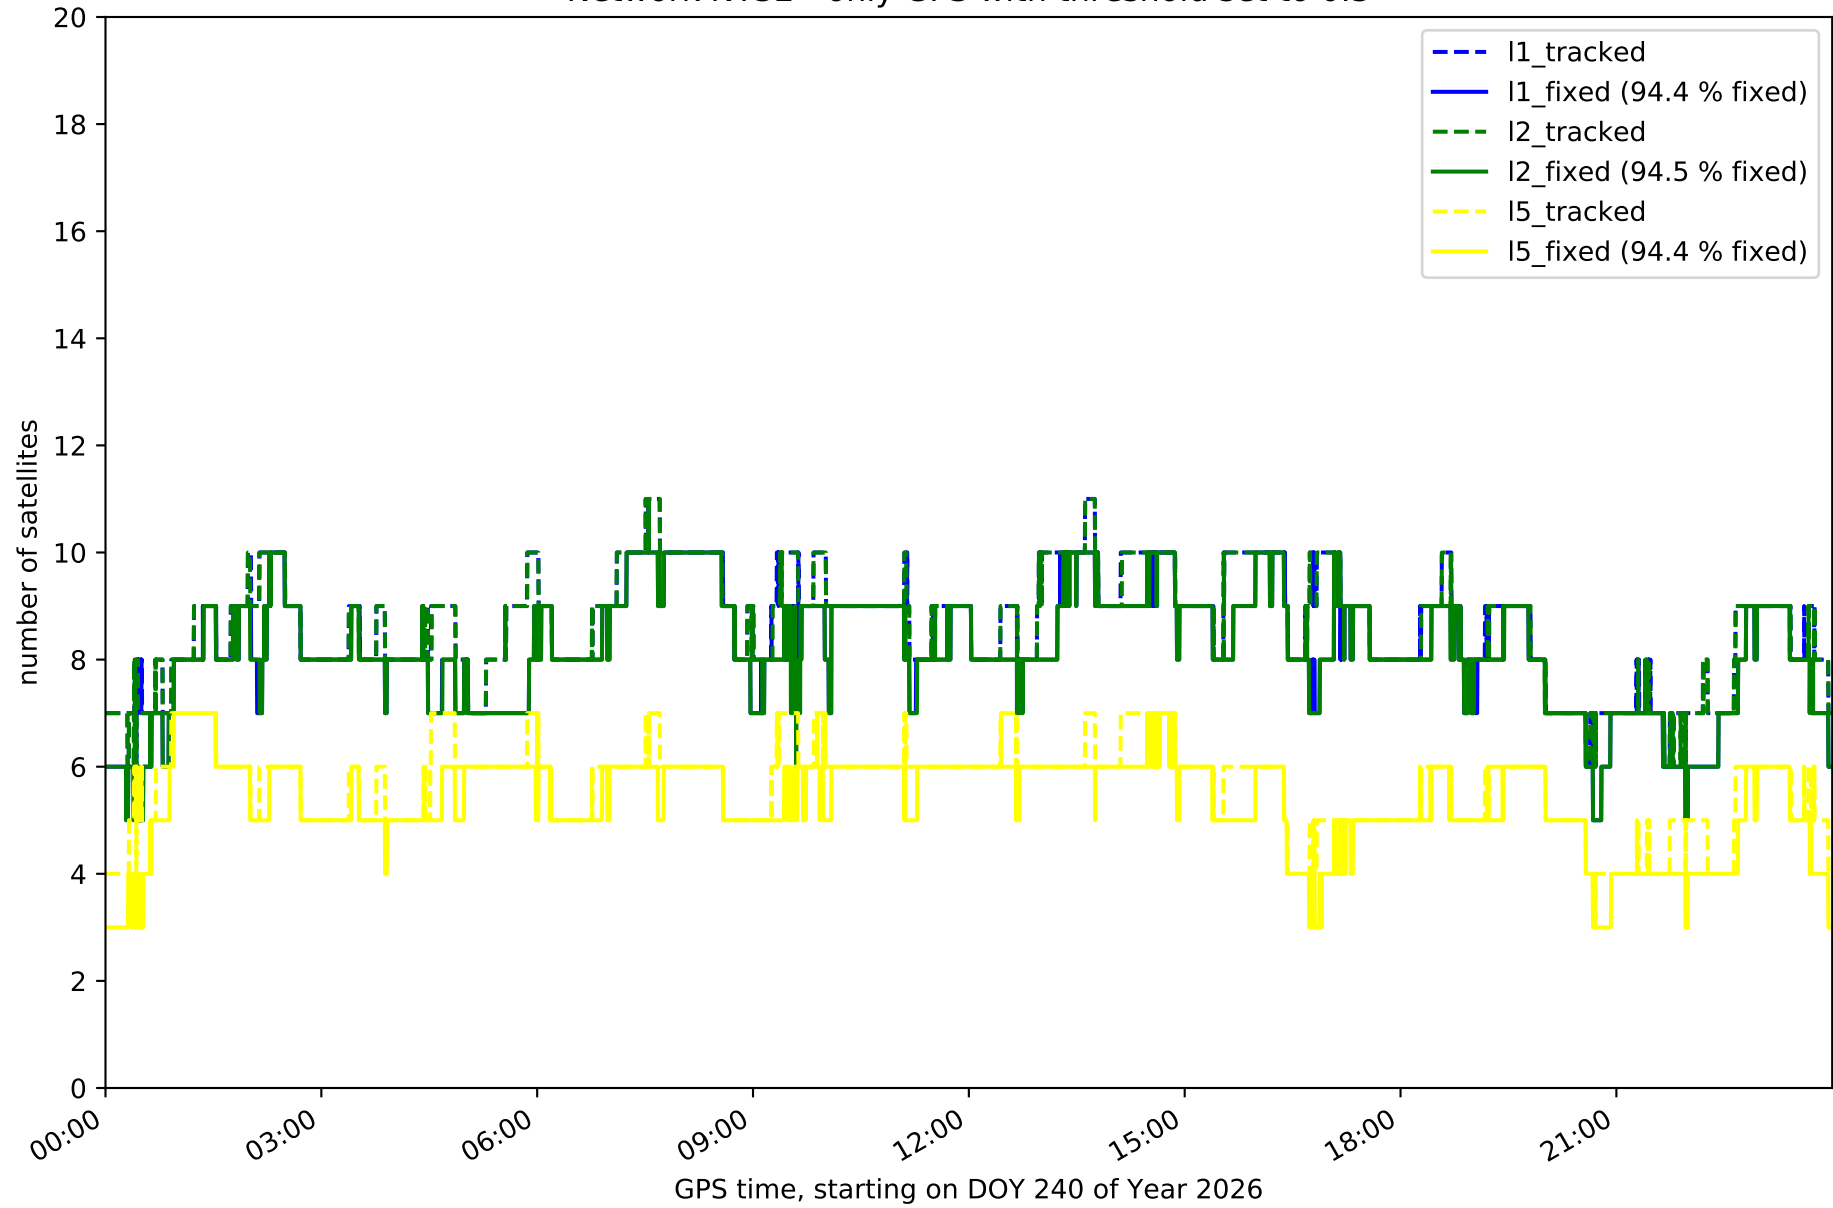


Network NT32 - only GLONASS with threshold set to 0.3

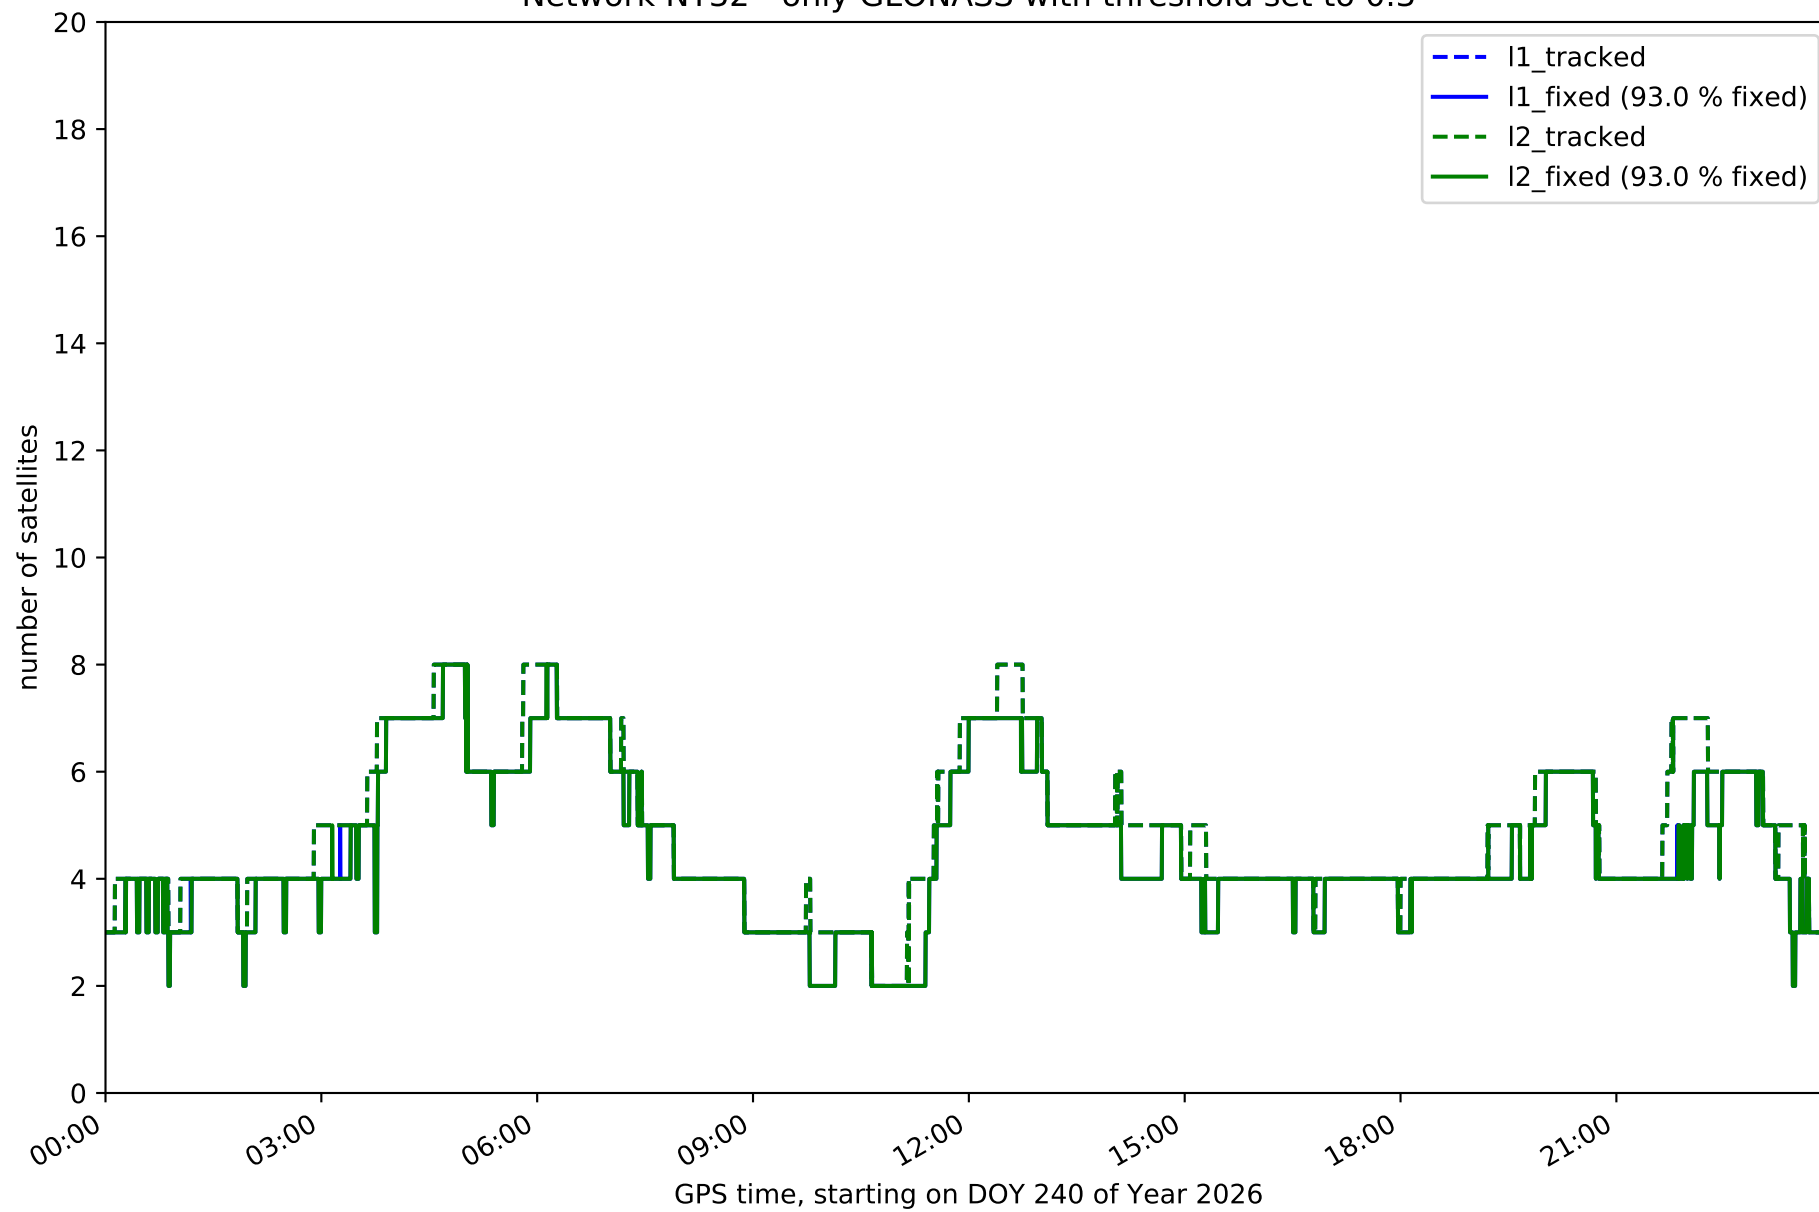


Network NT32 - only BDS with threshold set to 0.3

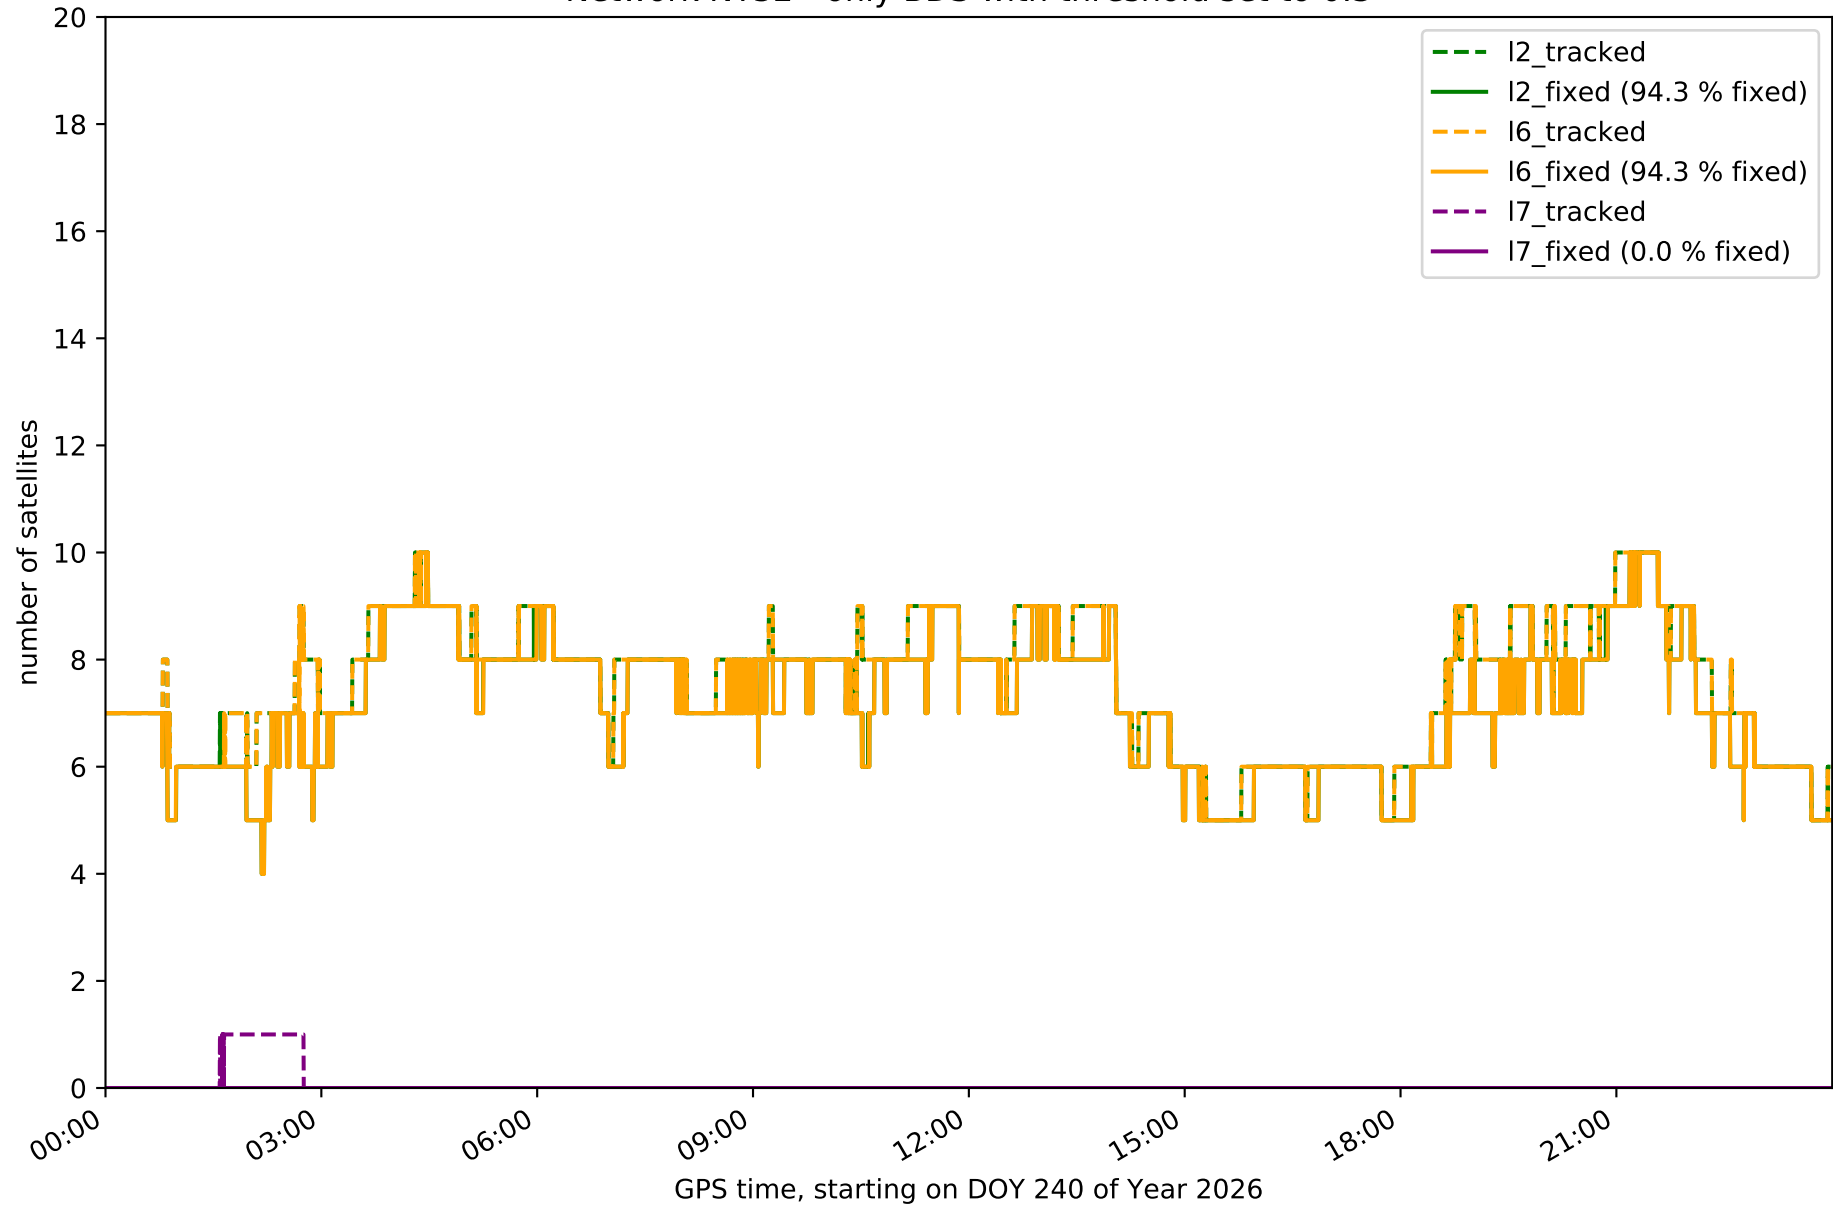


Network NT32 - only Galileo with threshold set to 0.3

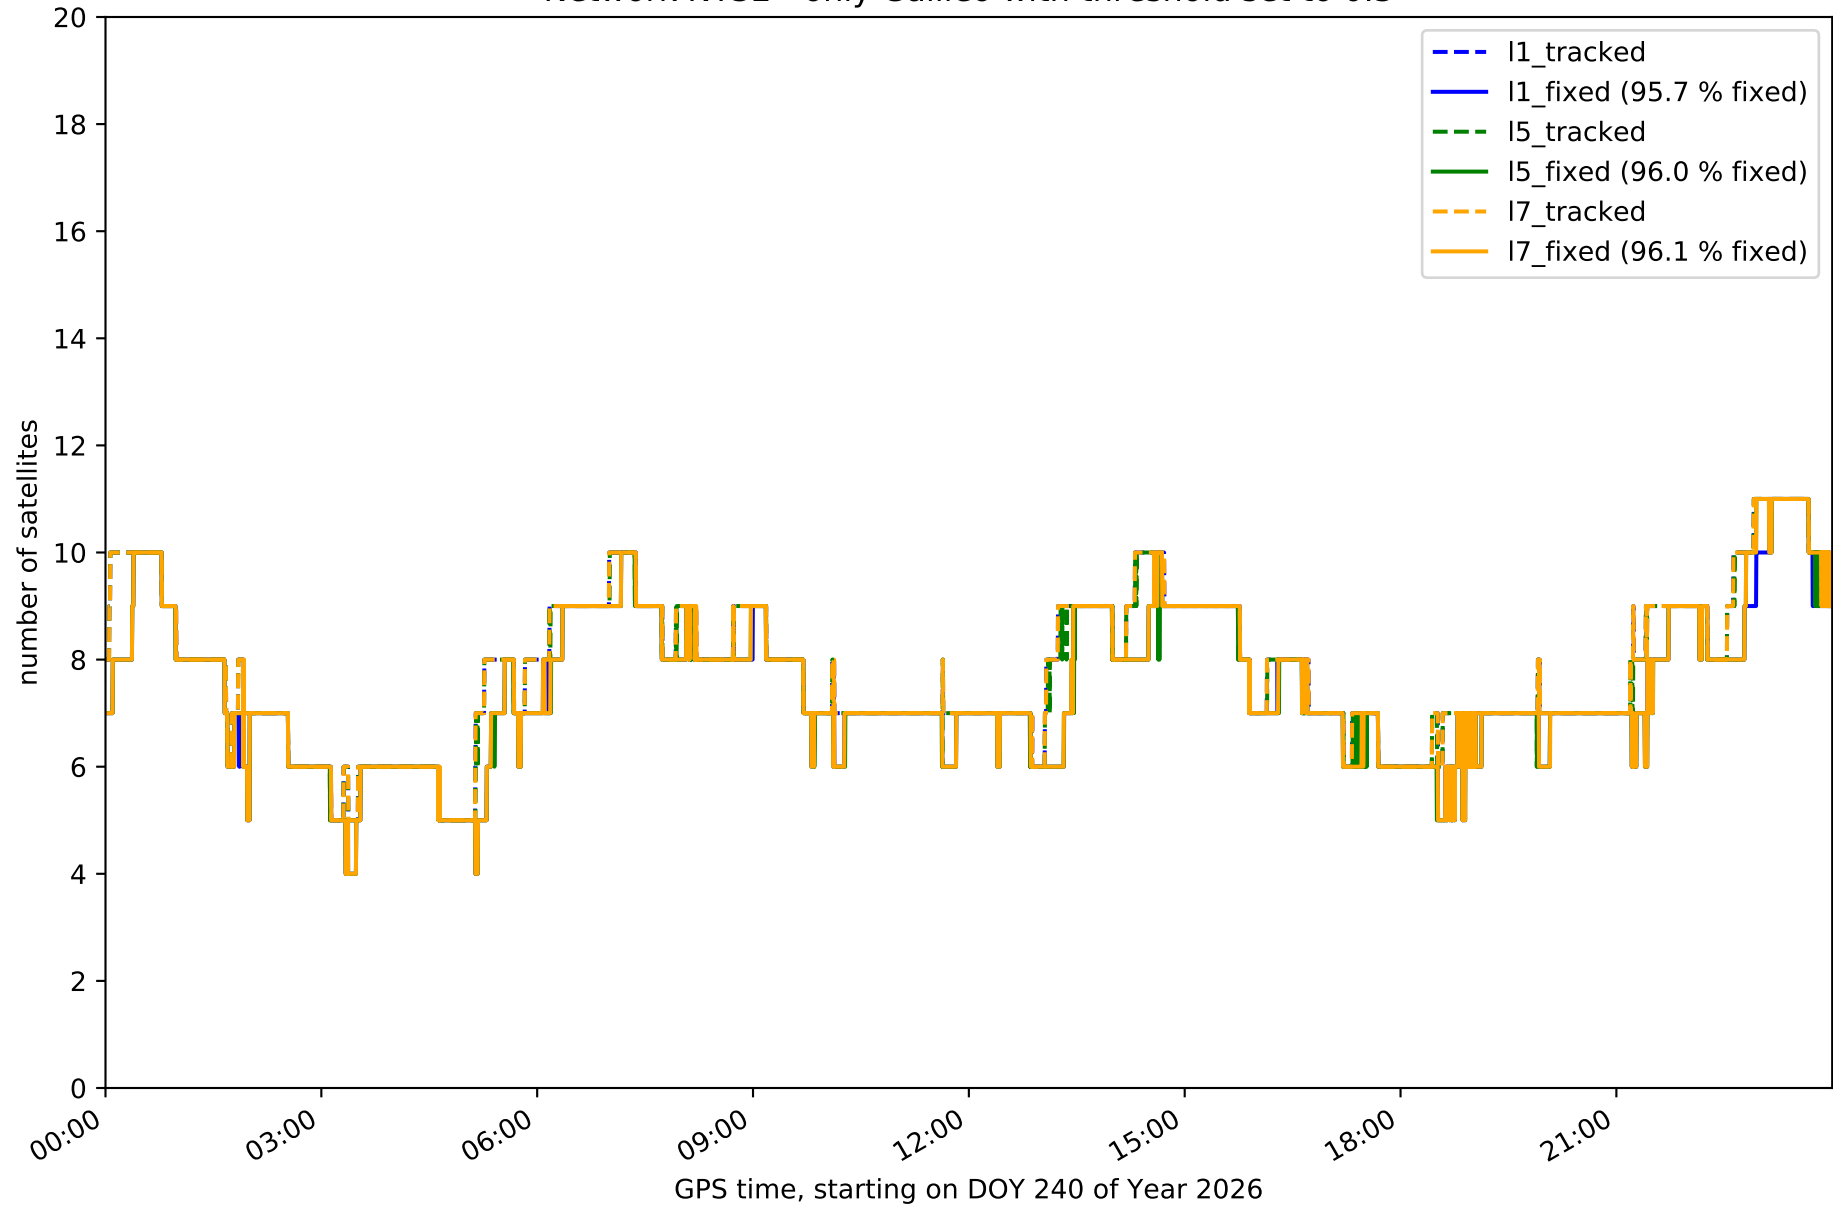


Station EH01 in network NT32

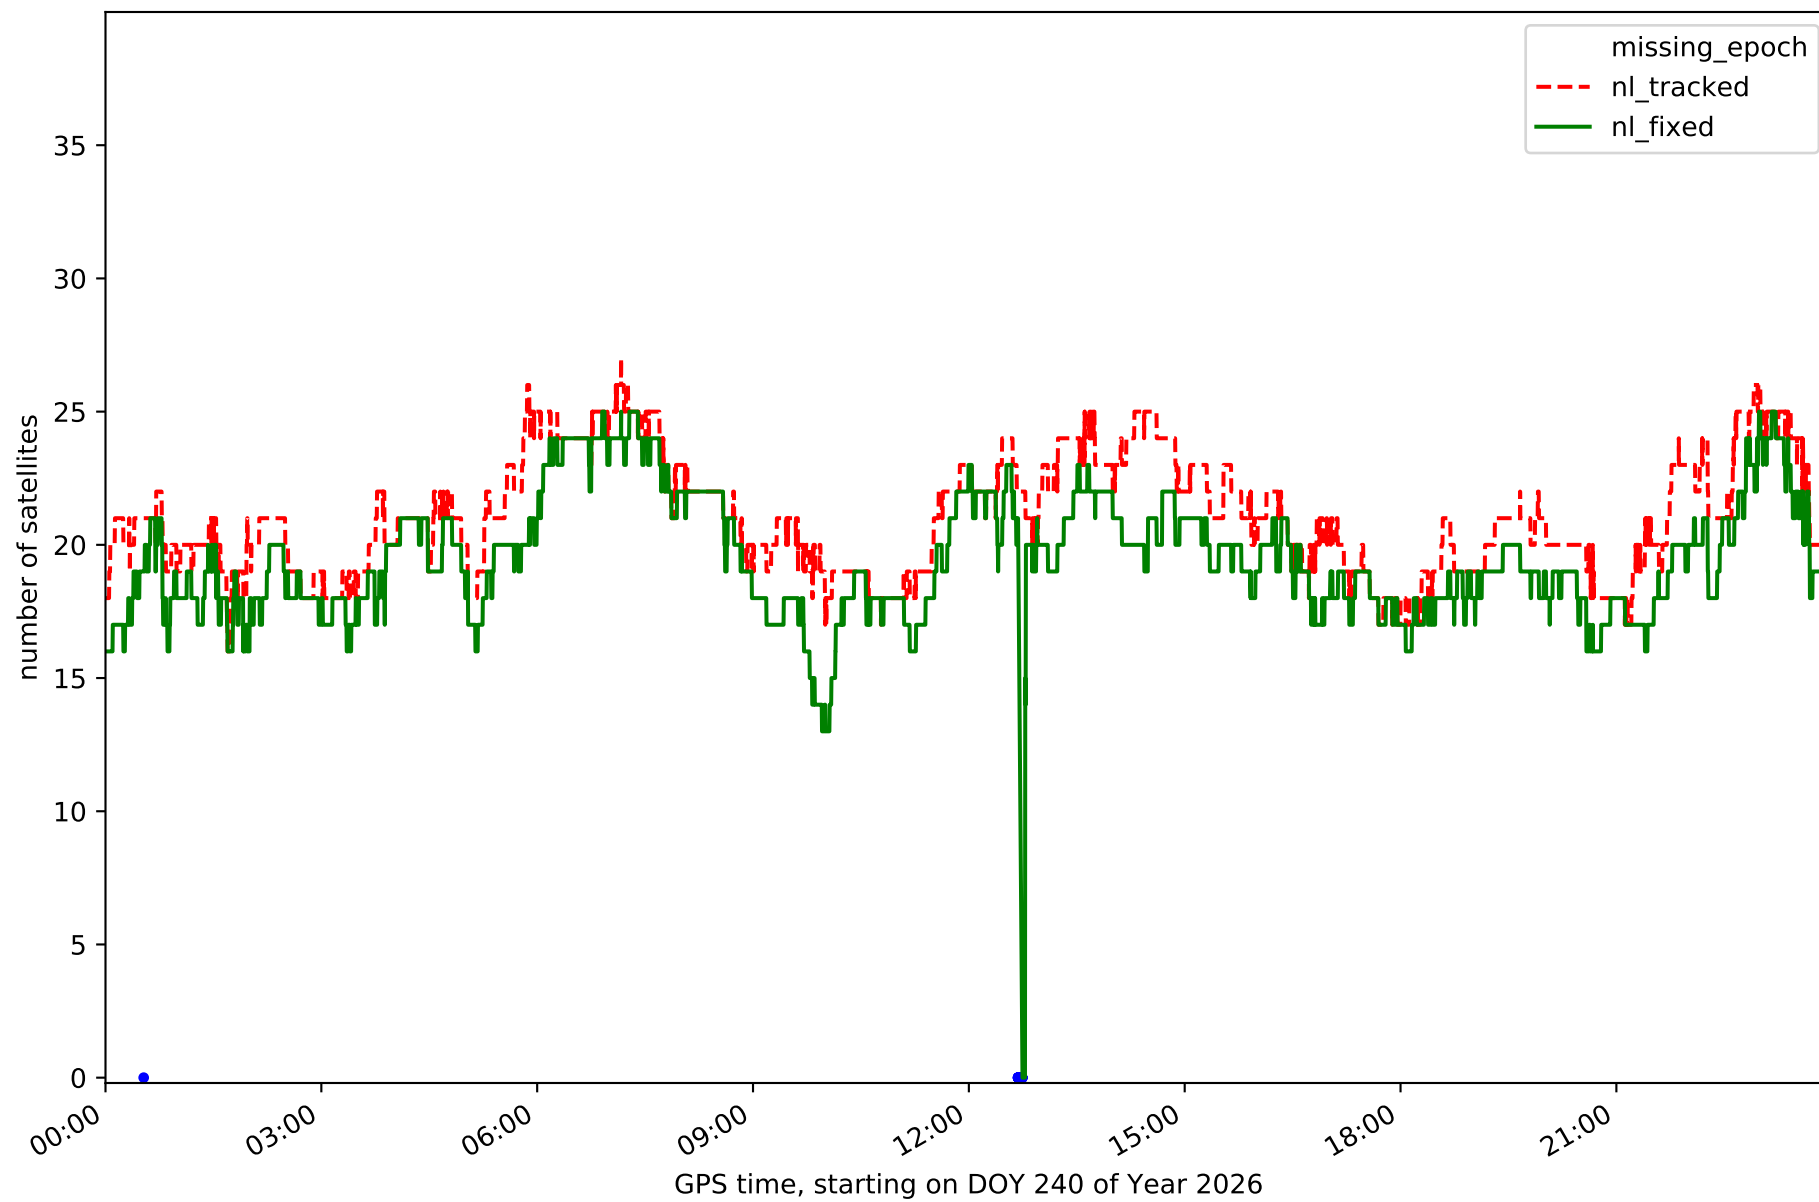


Station EH02 in network NT32

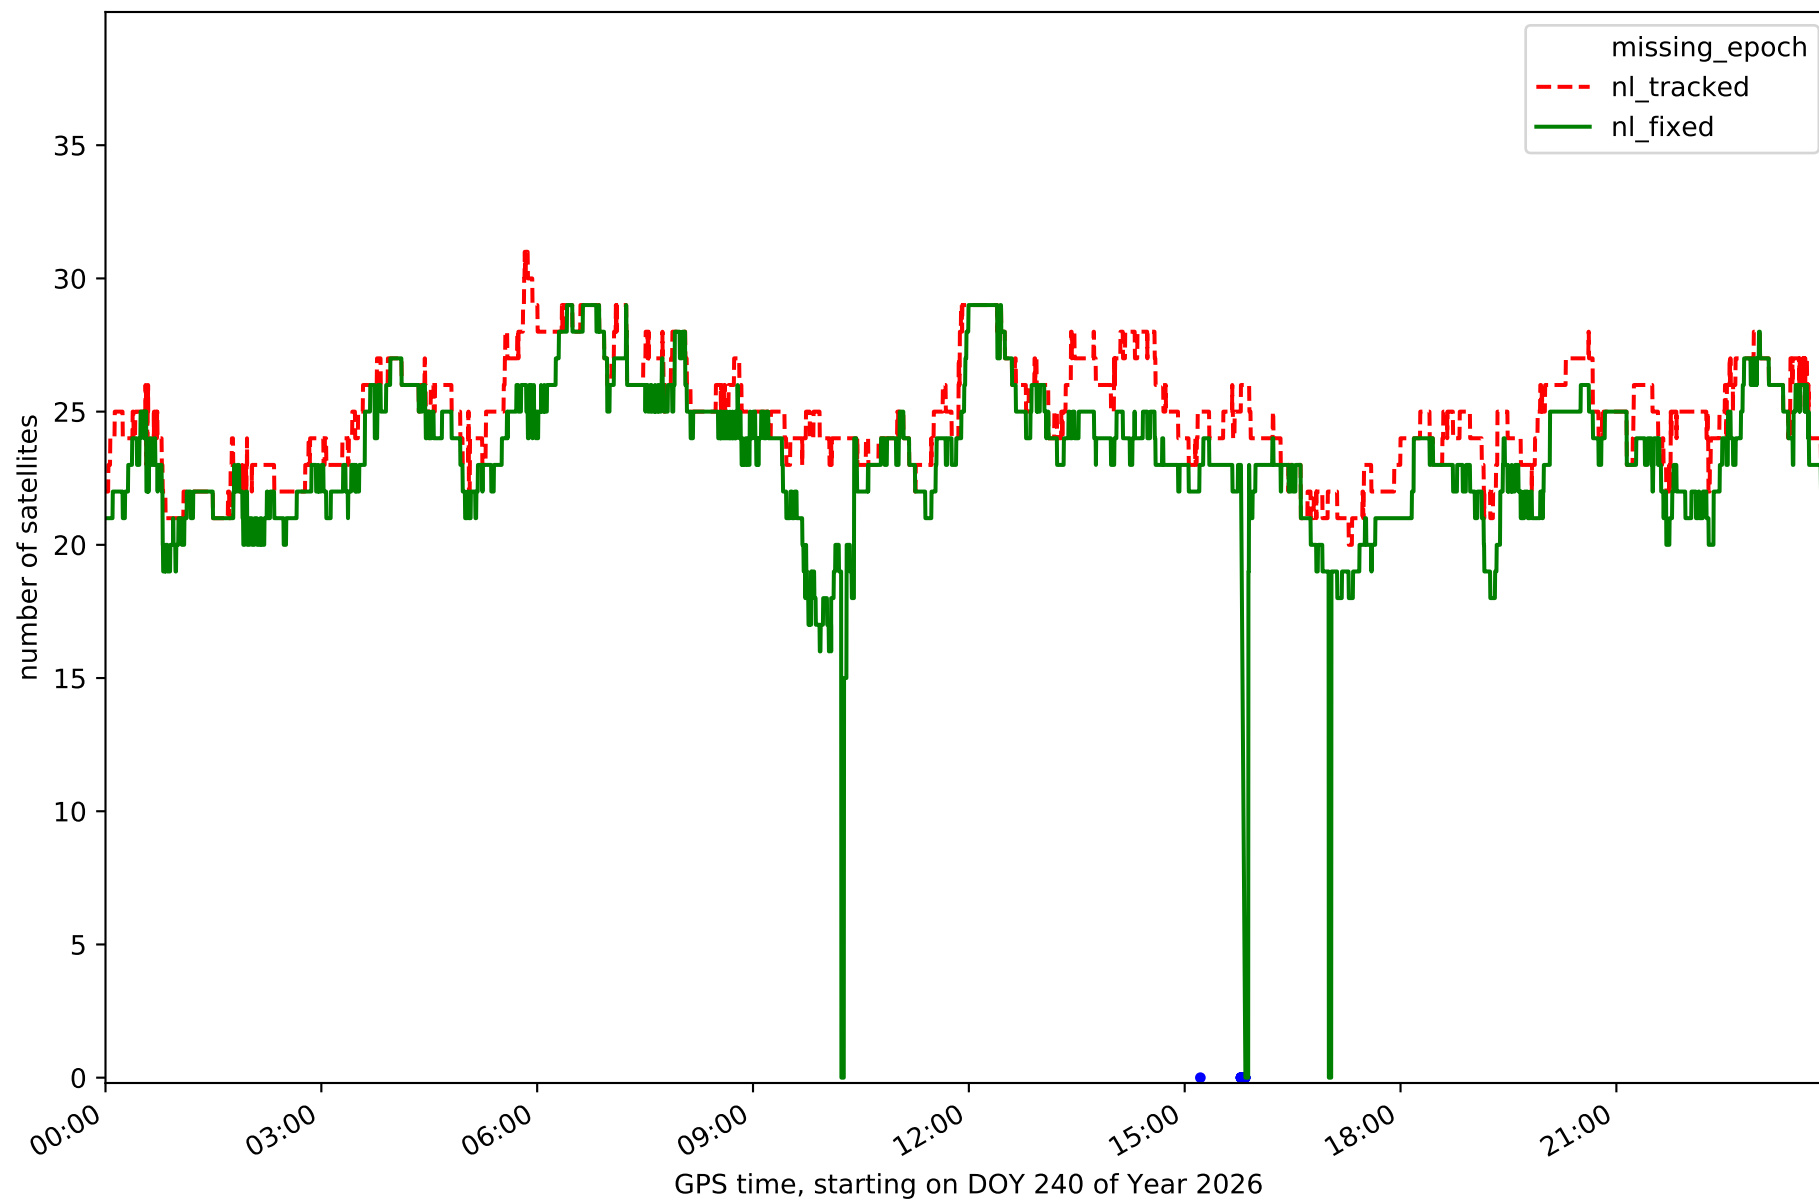


Station GOM1 in network NT32

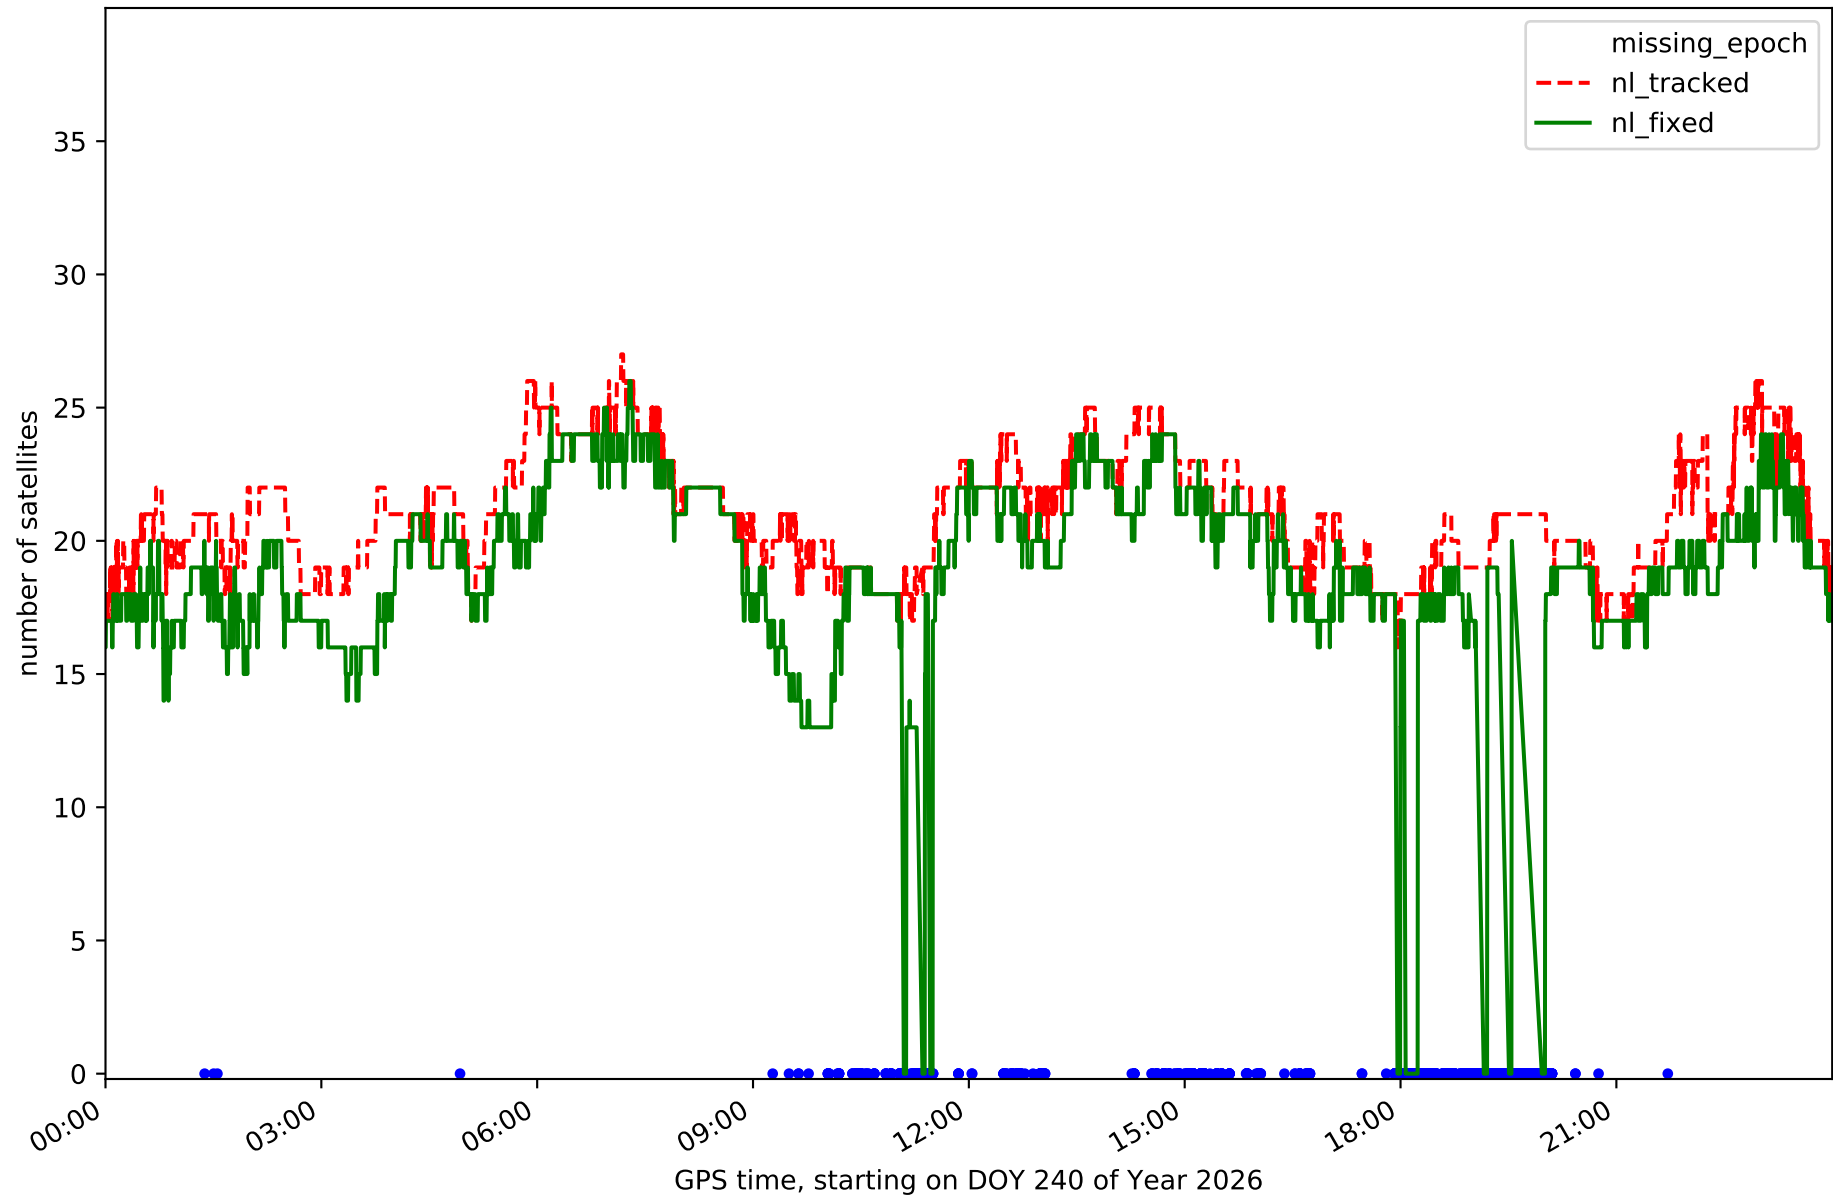


Station GOME in network NT32

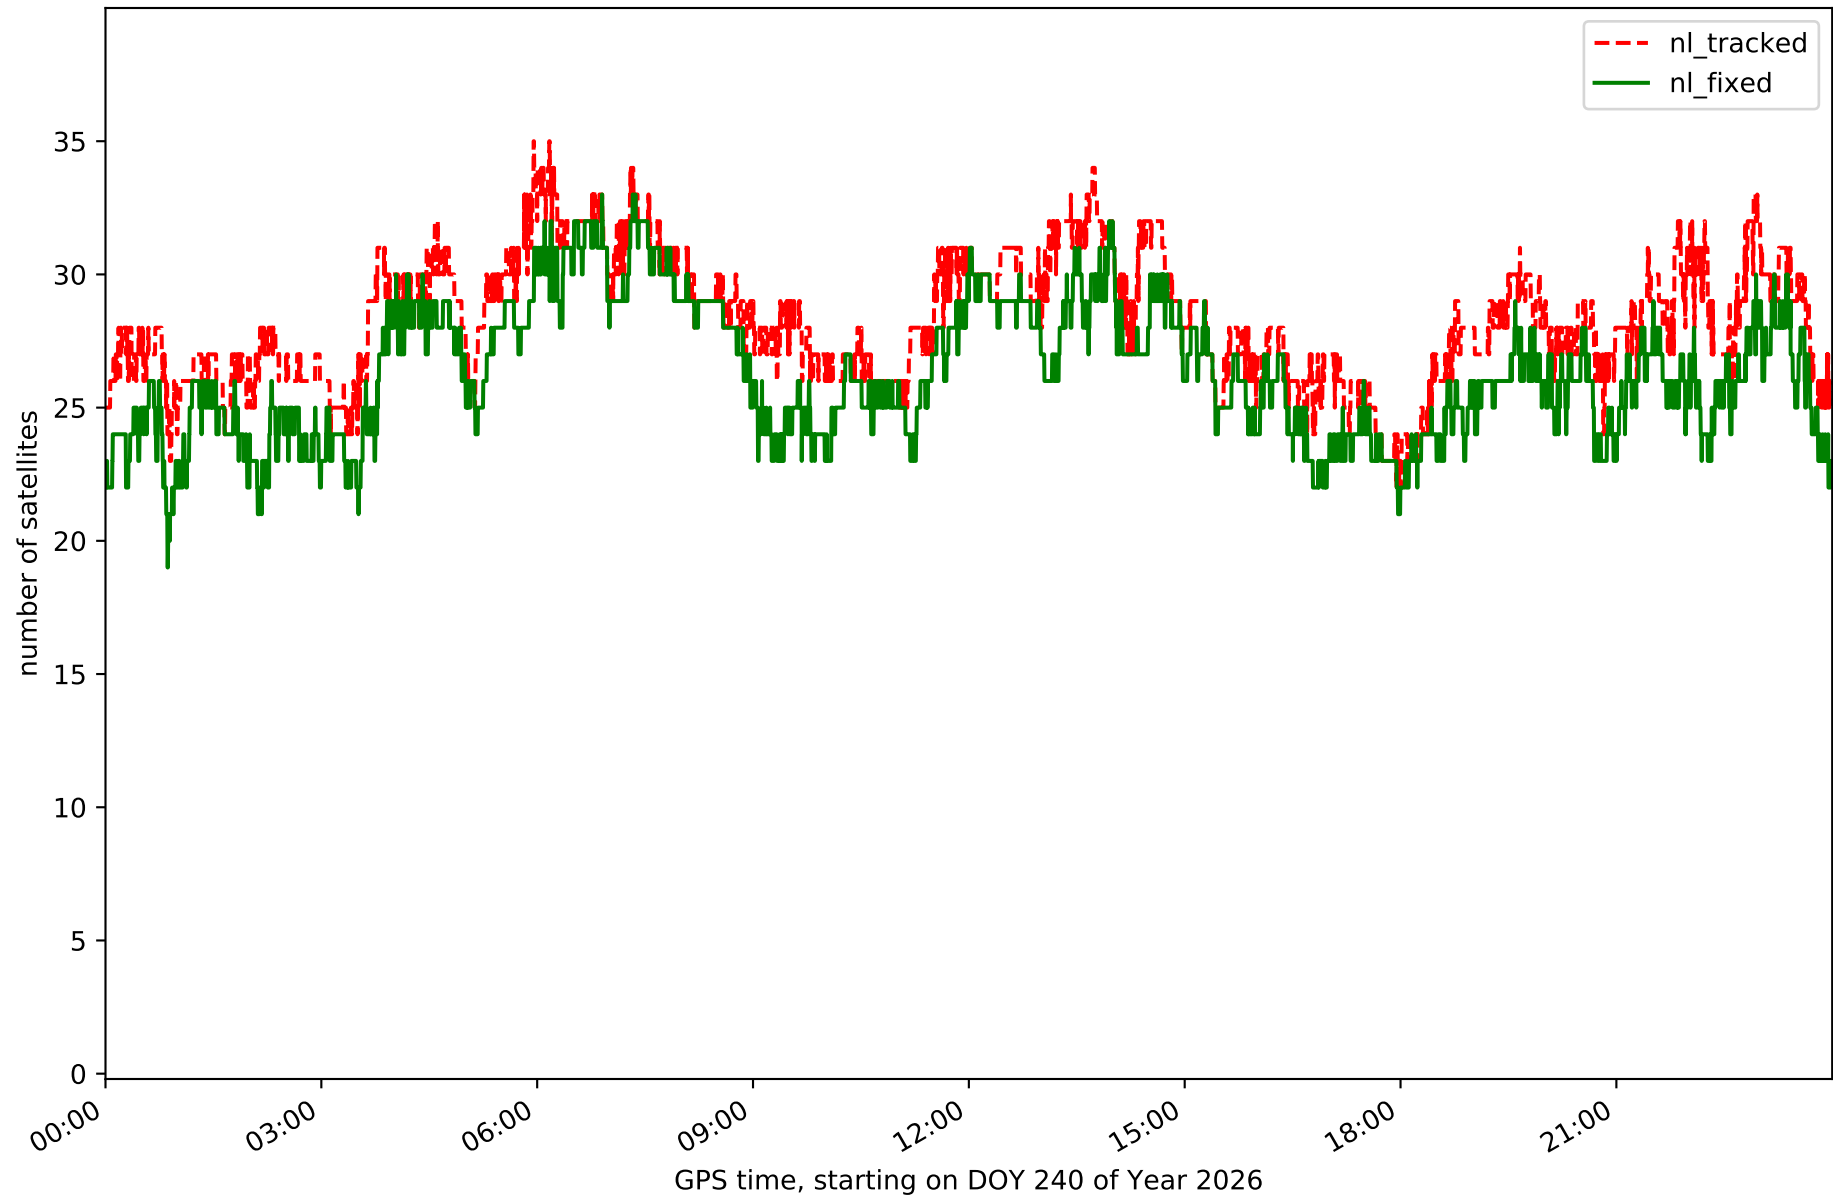


Station IZAN in network NT32

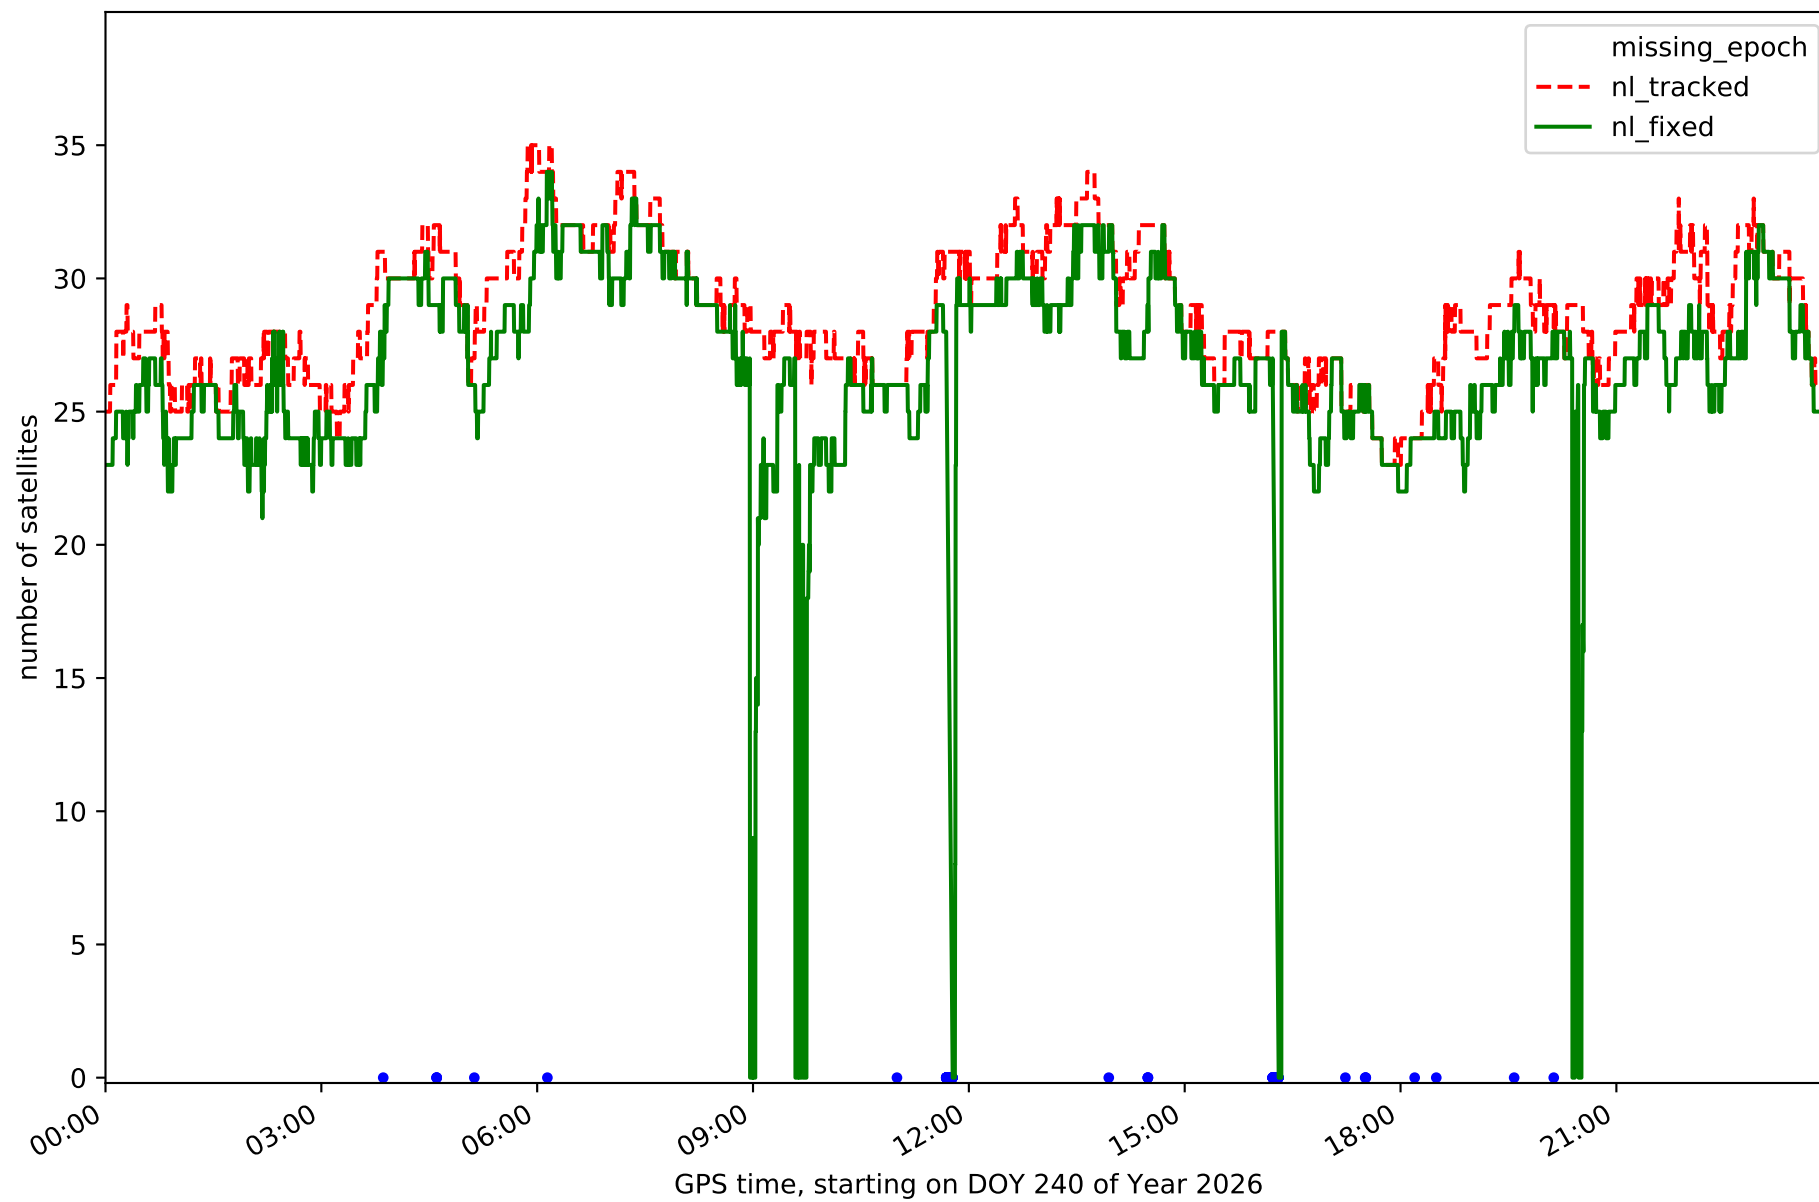


Station LP01 in network NT32

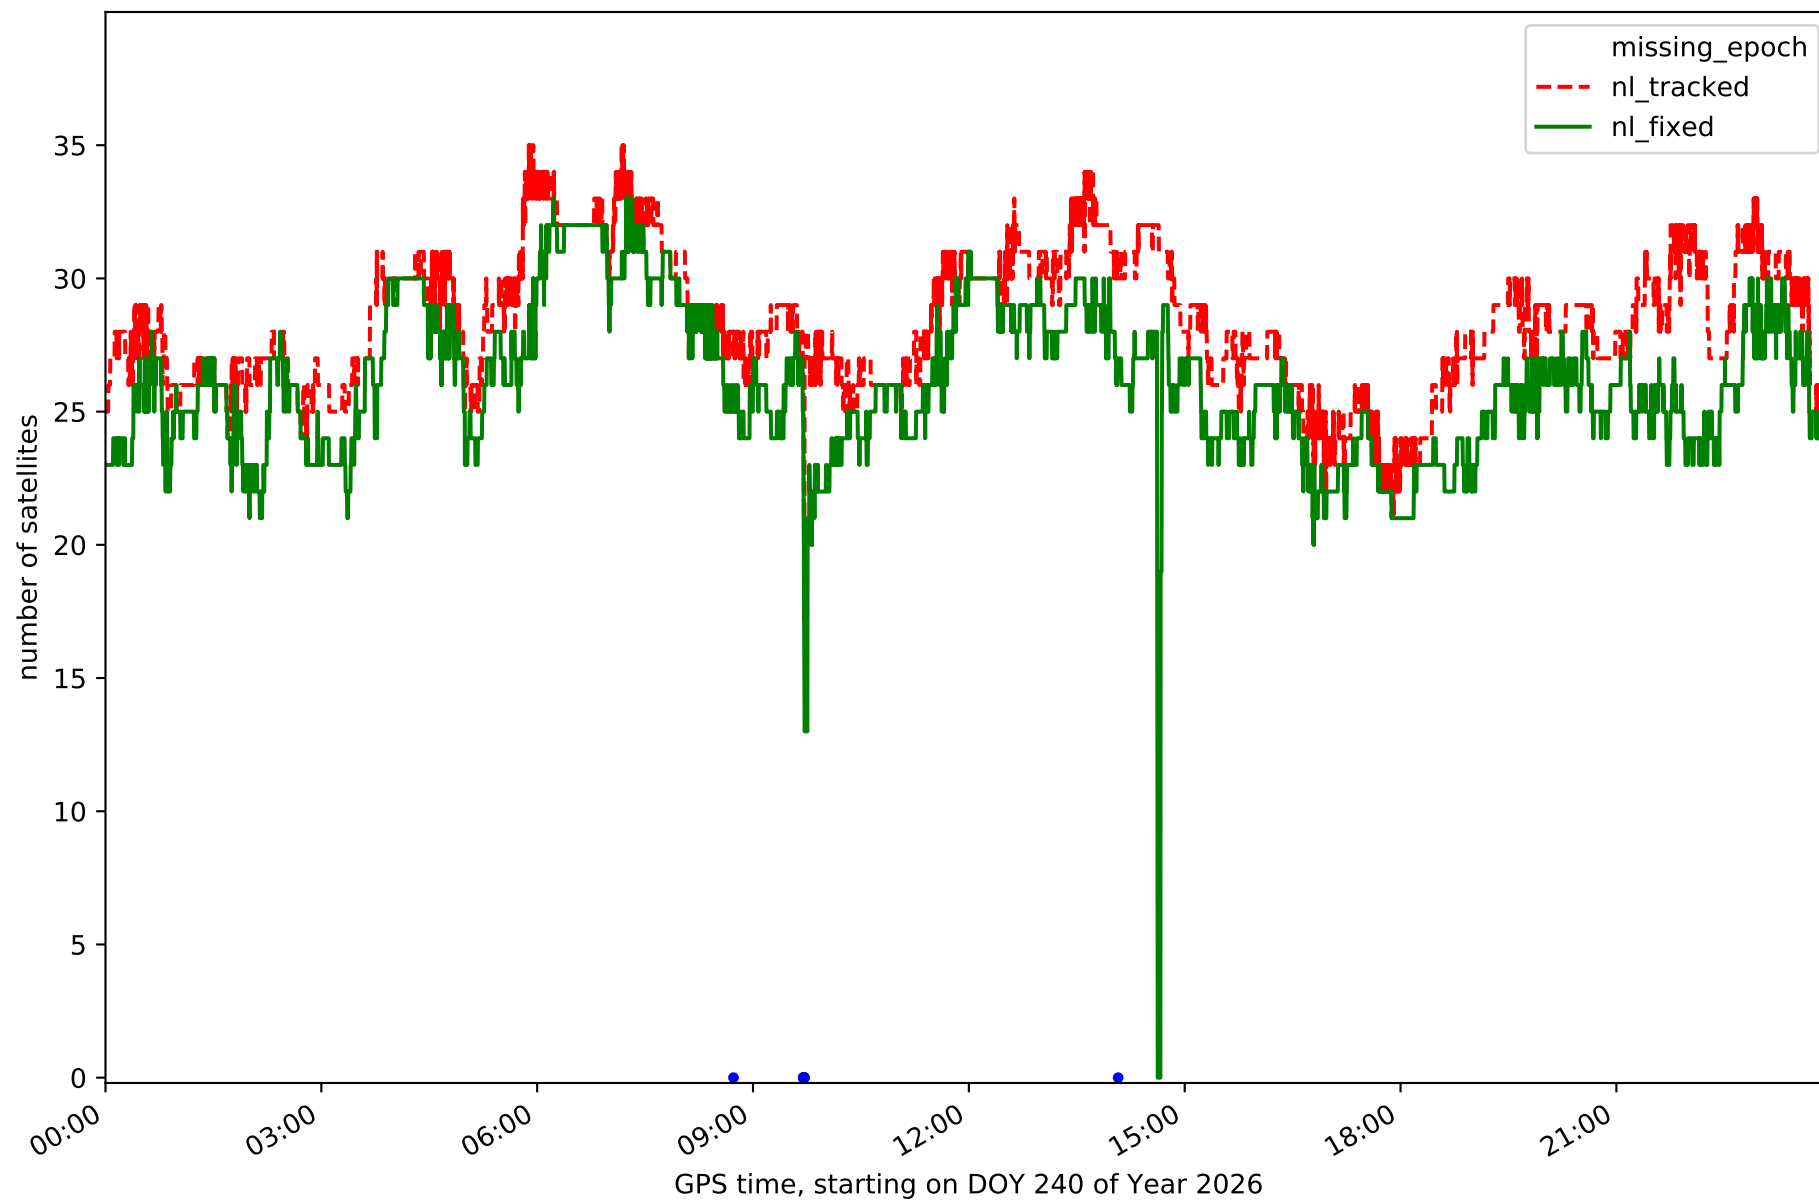


Station LP03 in network NT32

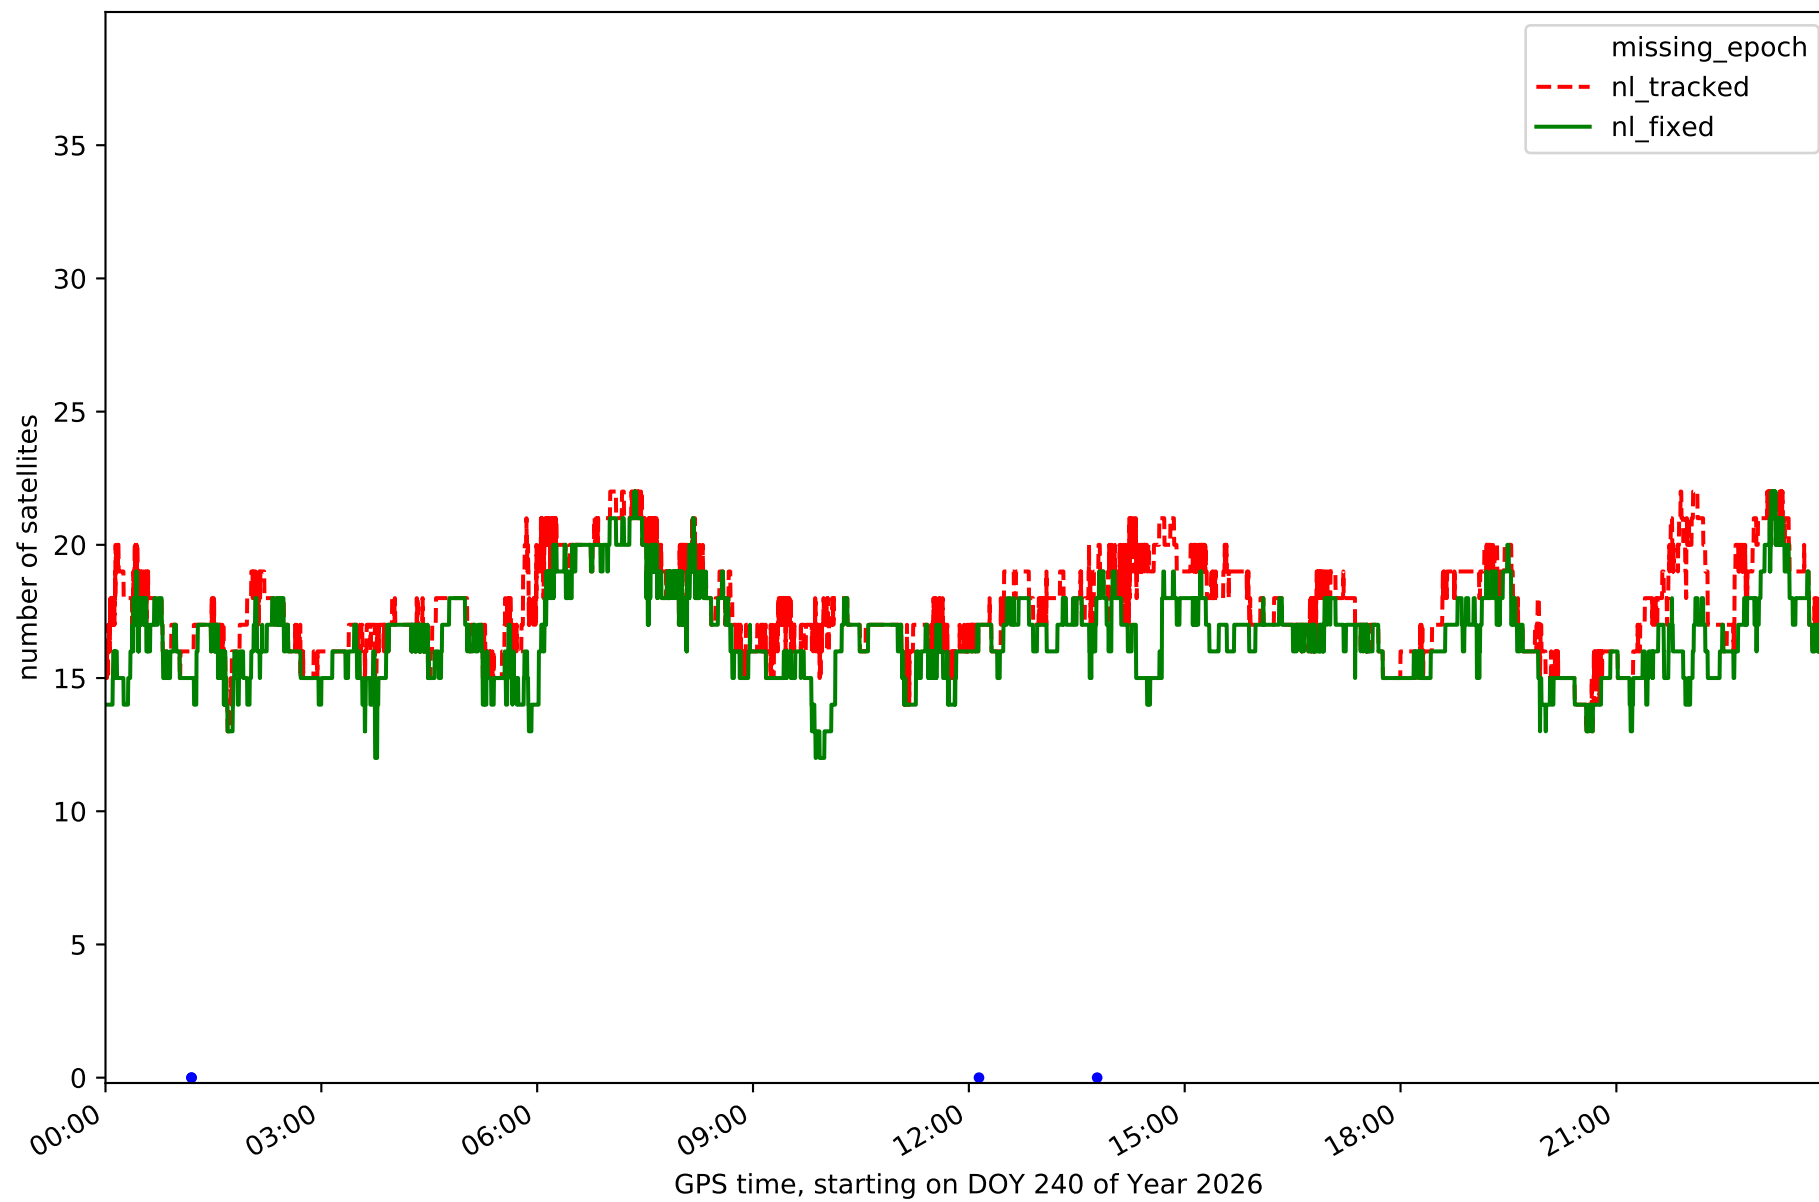


Station LPAL in network NT32

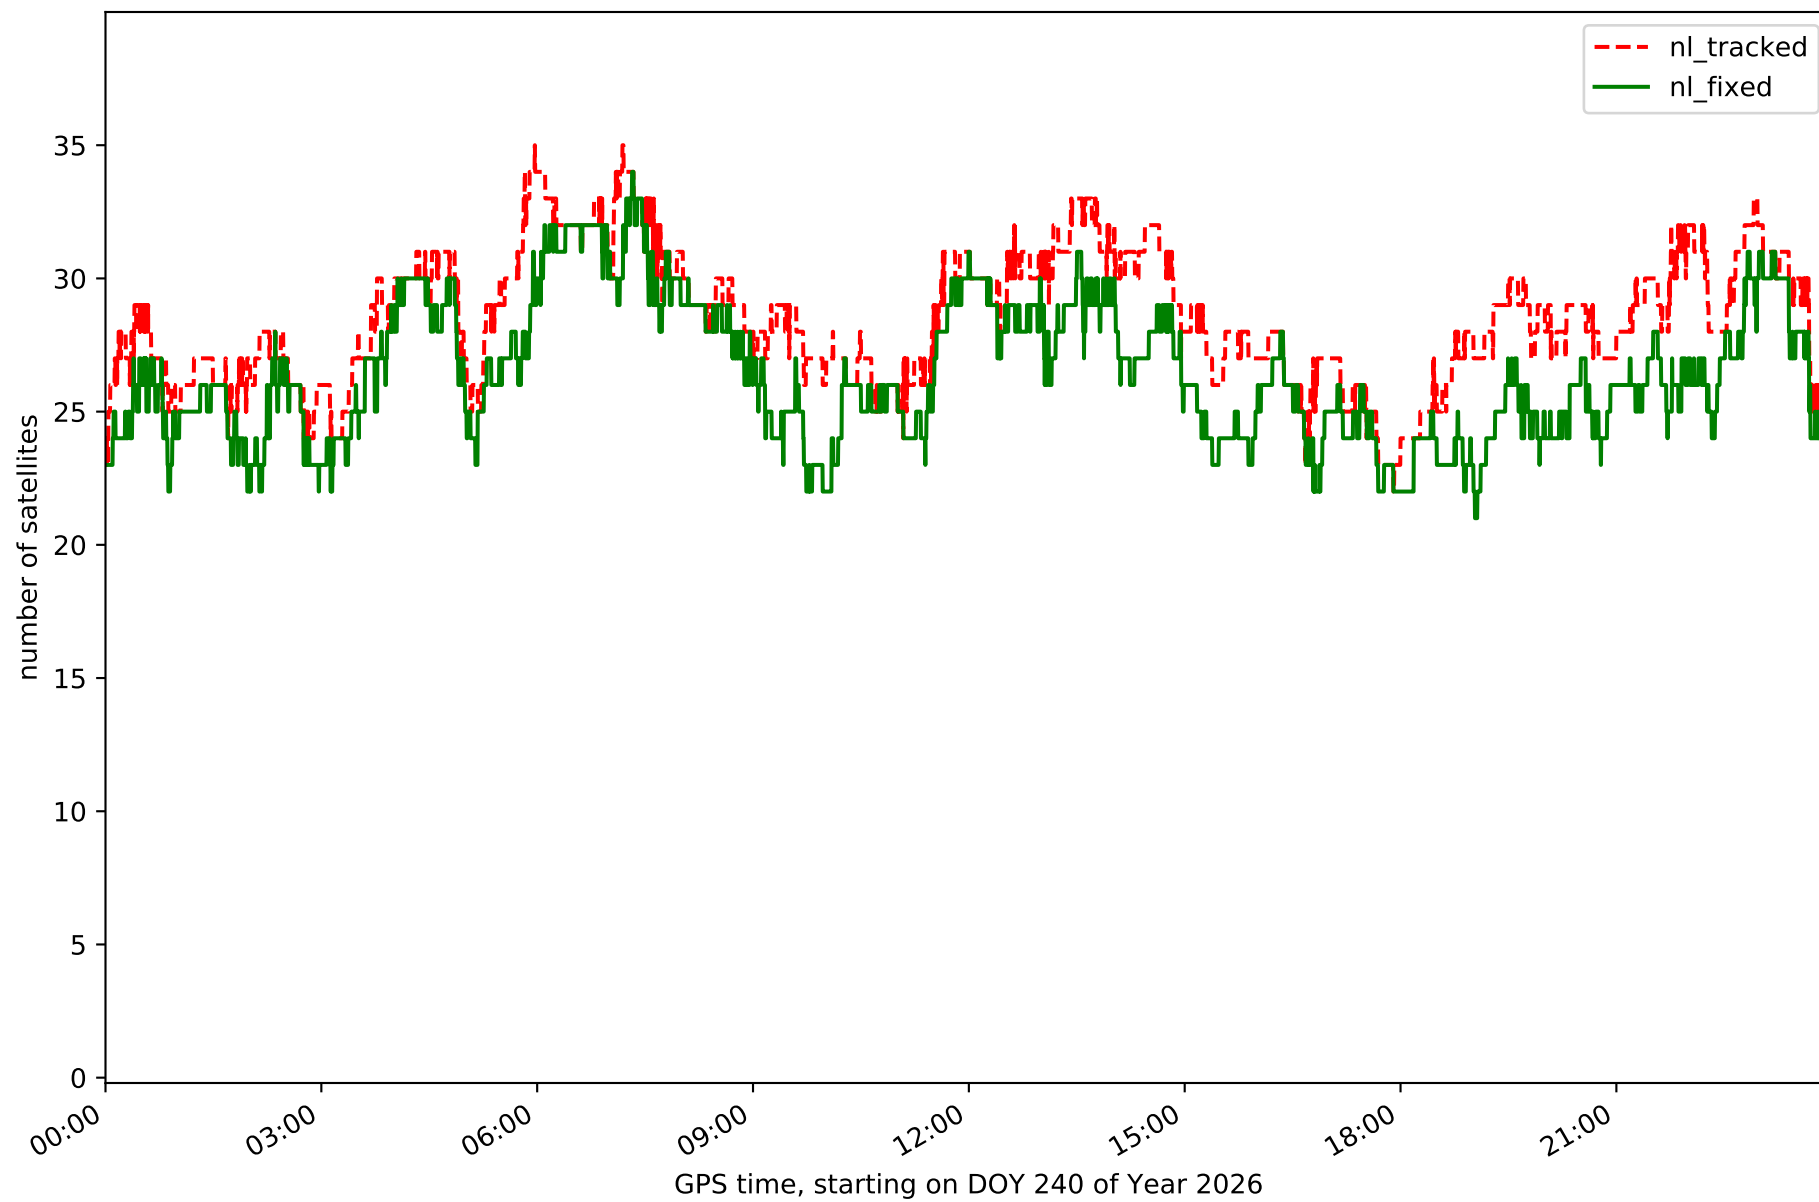


Station LRES in network NT32

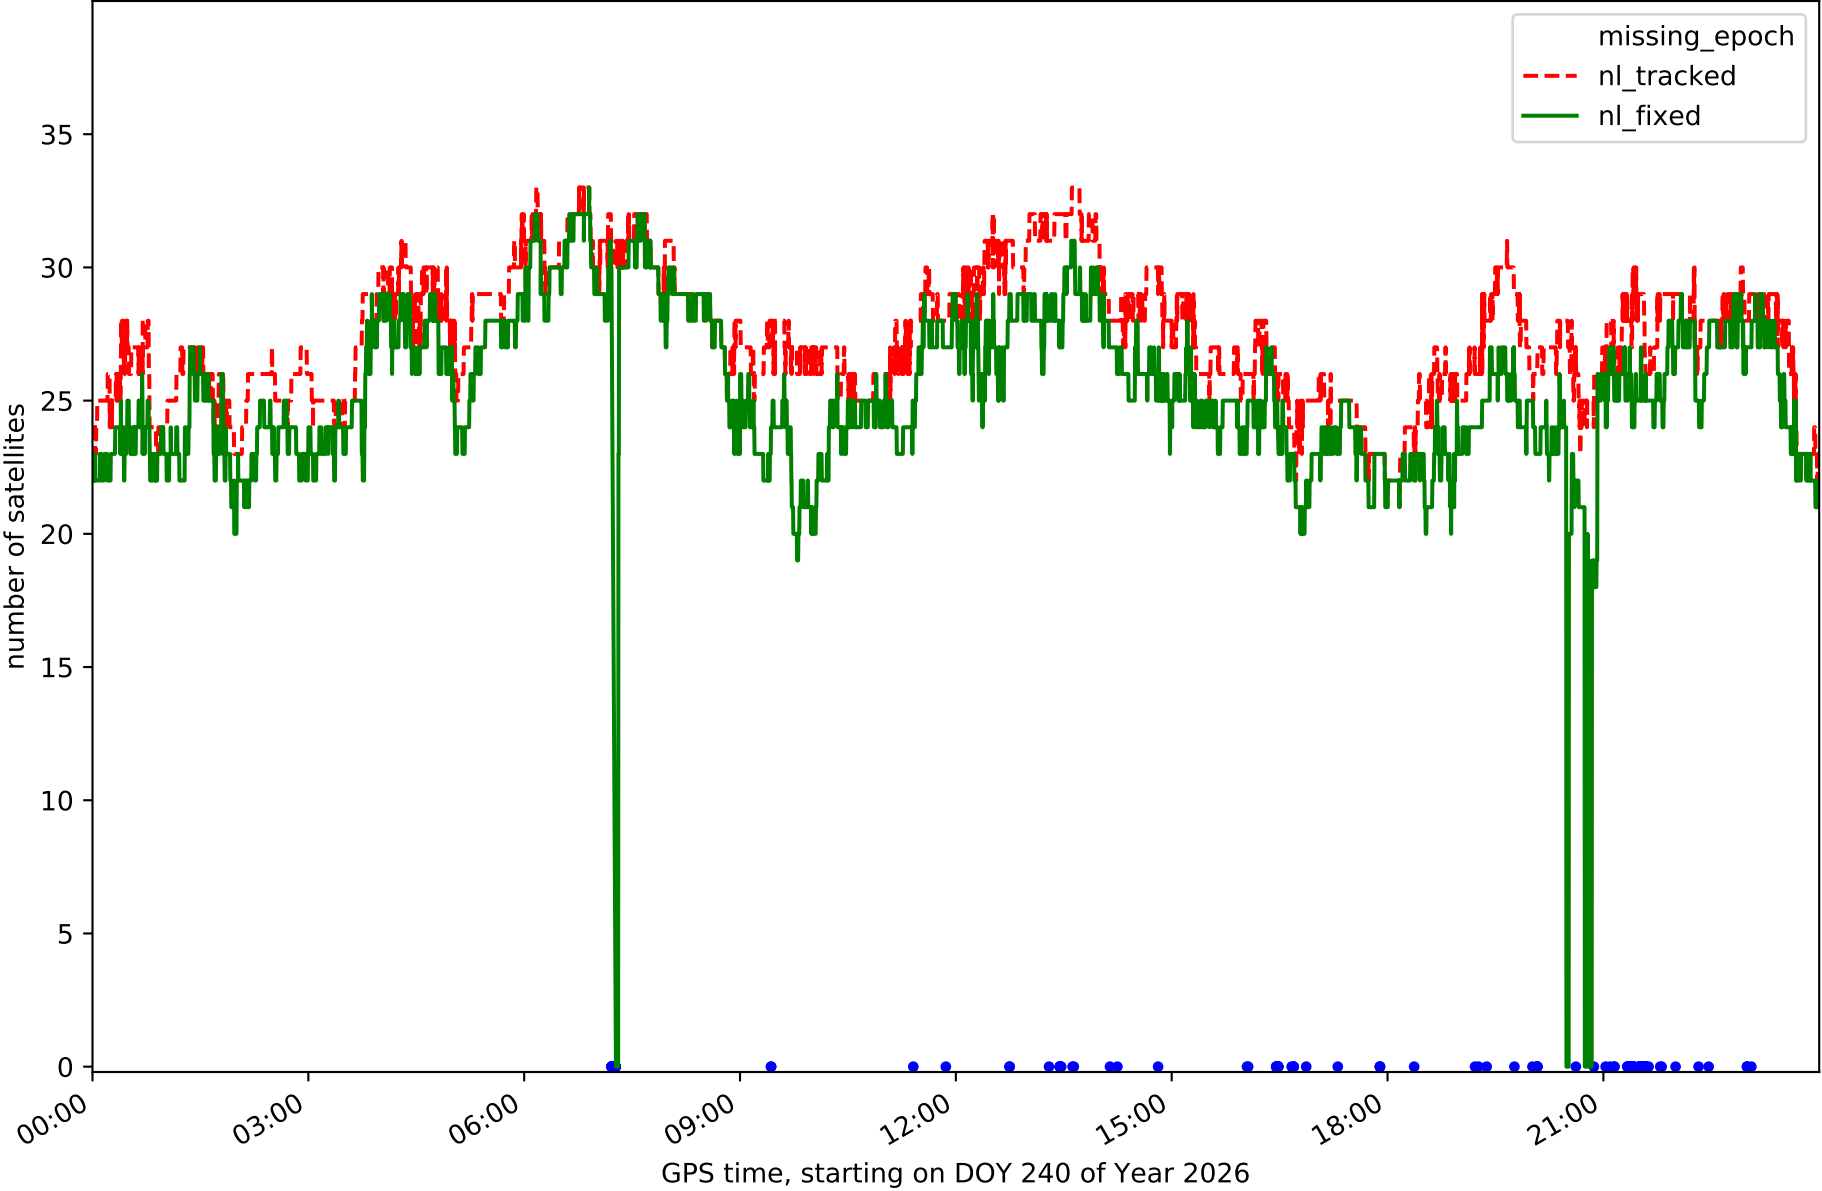


Station TN01 in network NT32

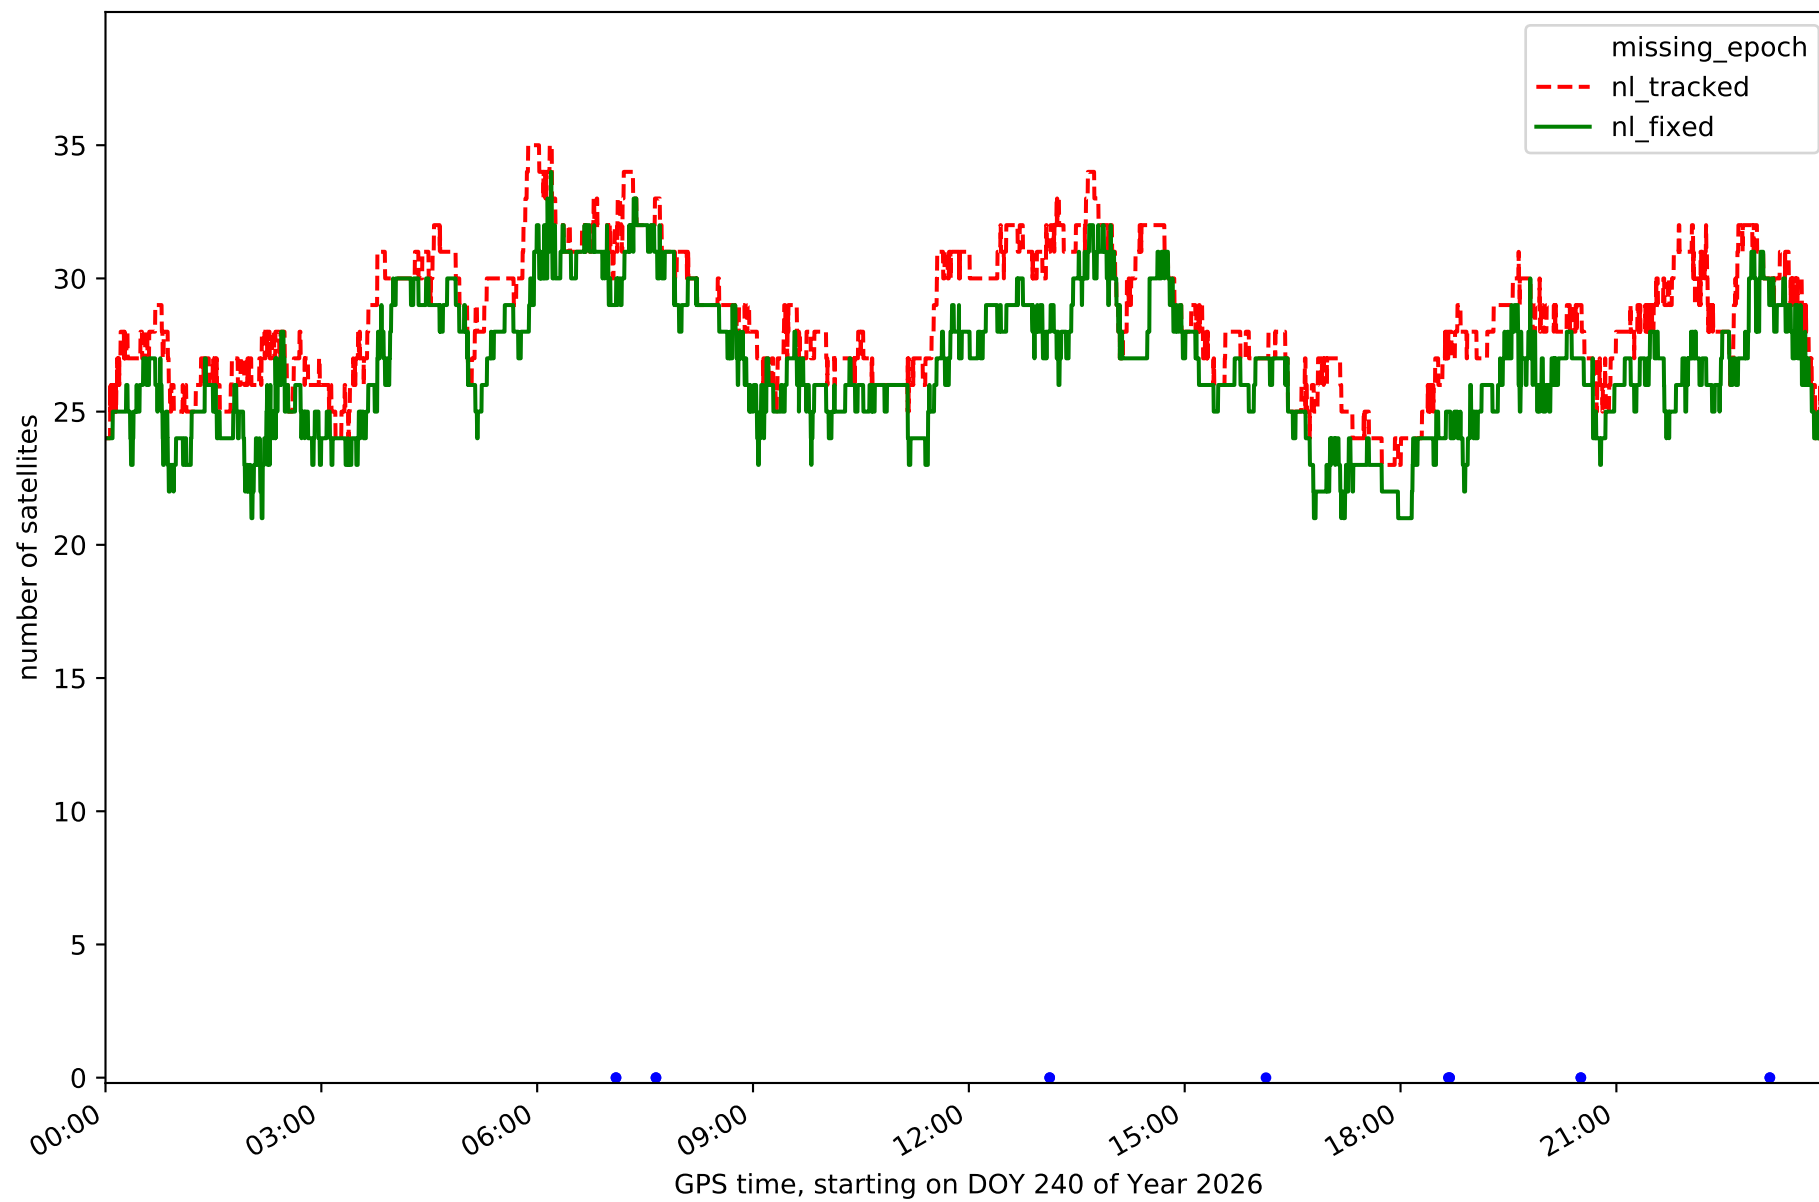


Station TN02 in network NT32

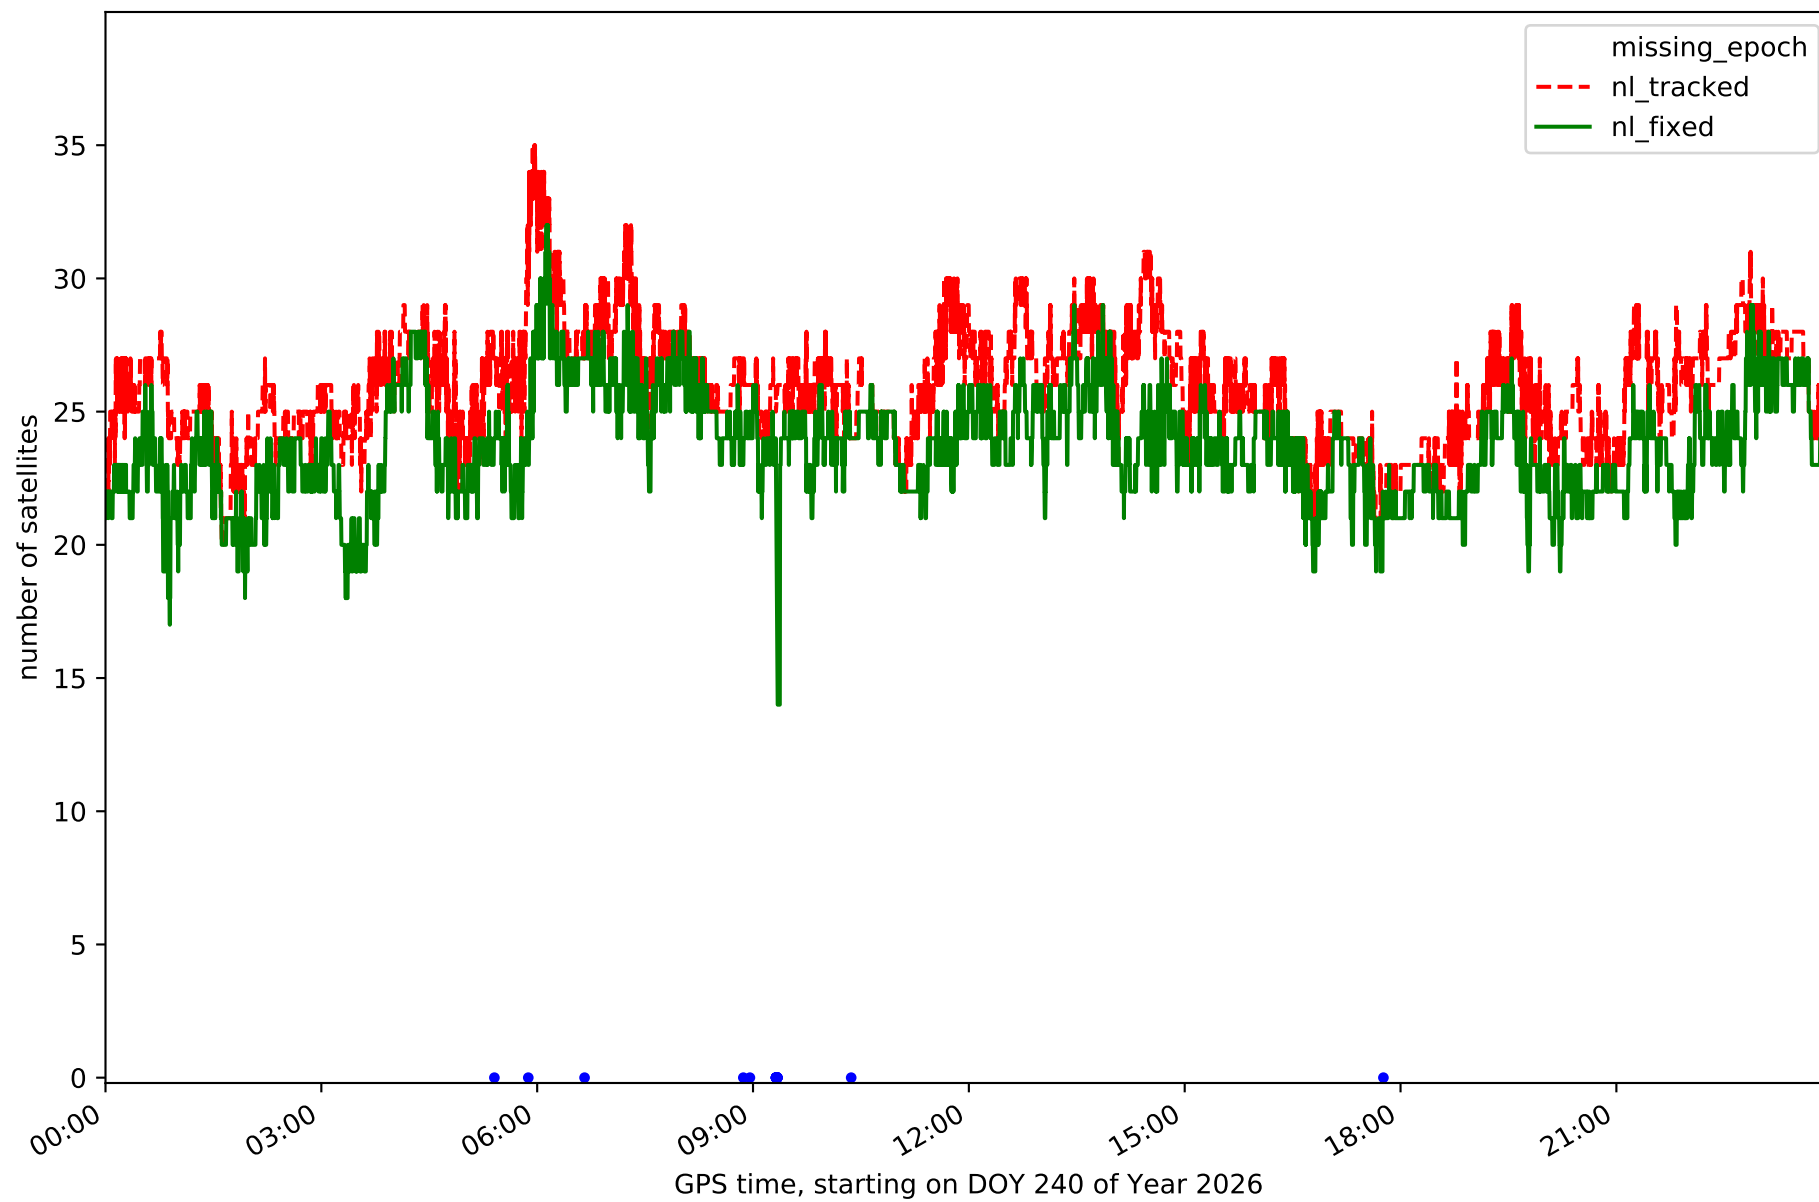


Station TN03 in network NT32

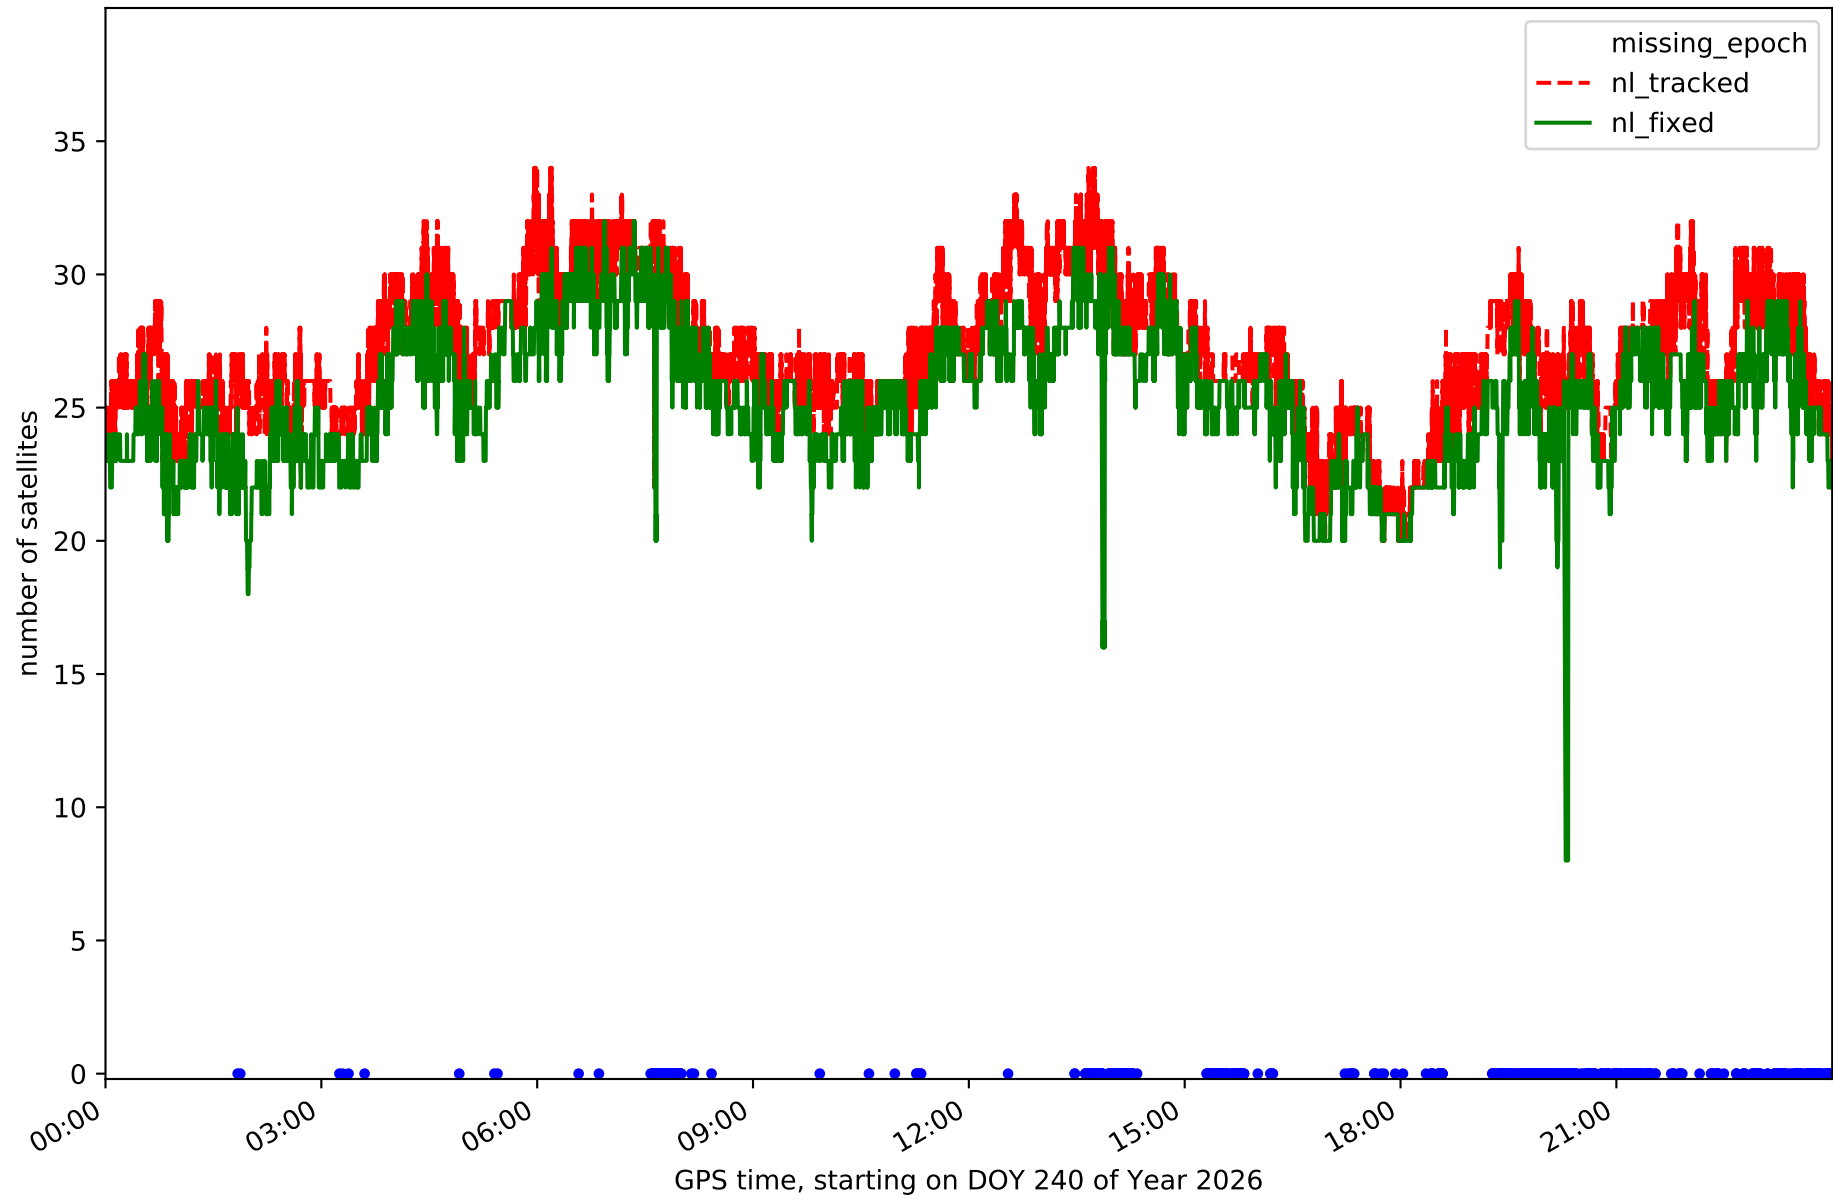


Station TN06 in network NT32

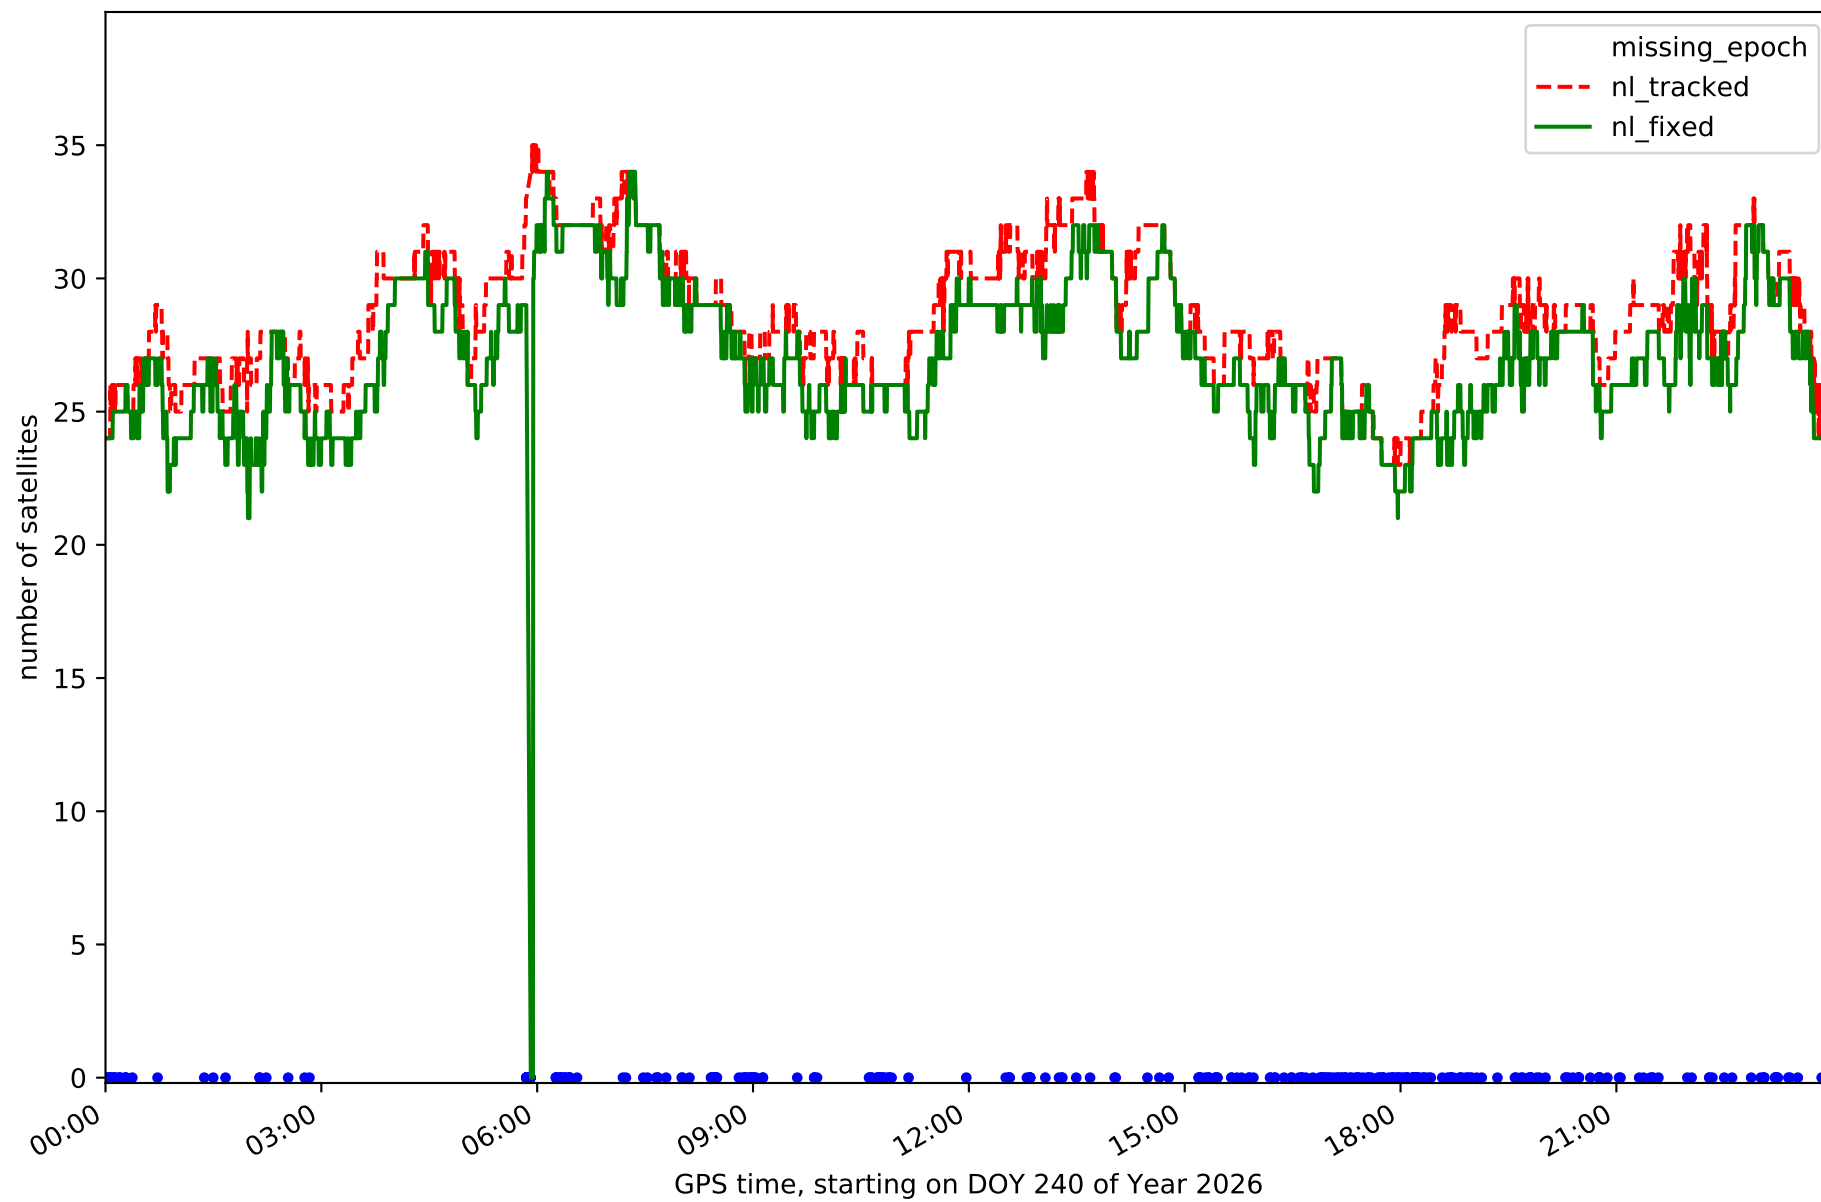


Station TN09 in network NT32

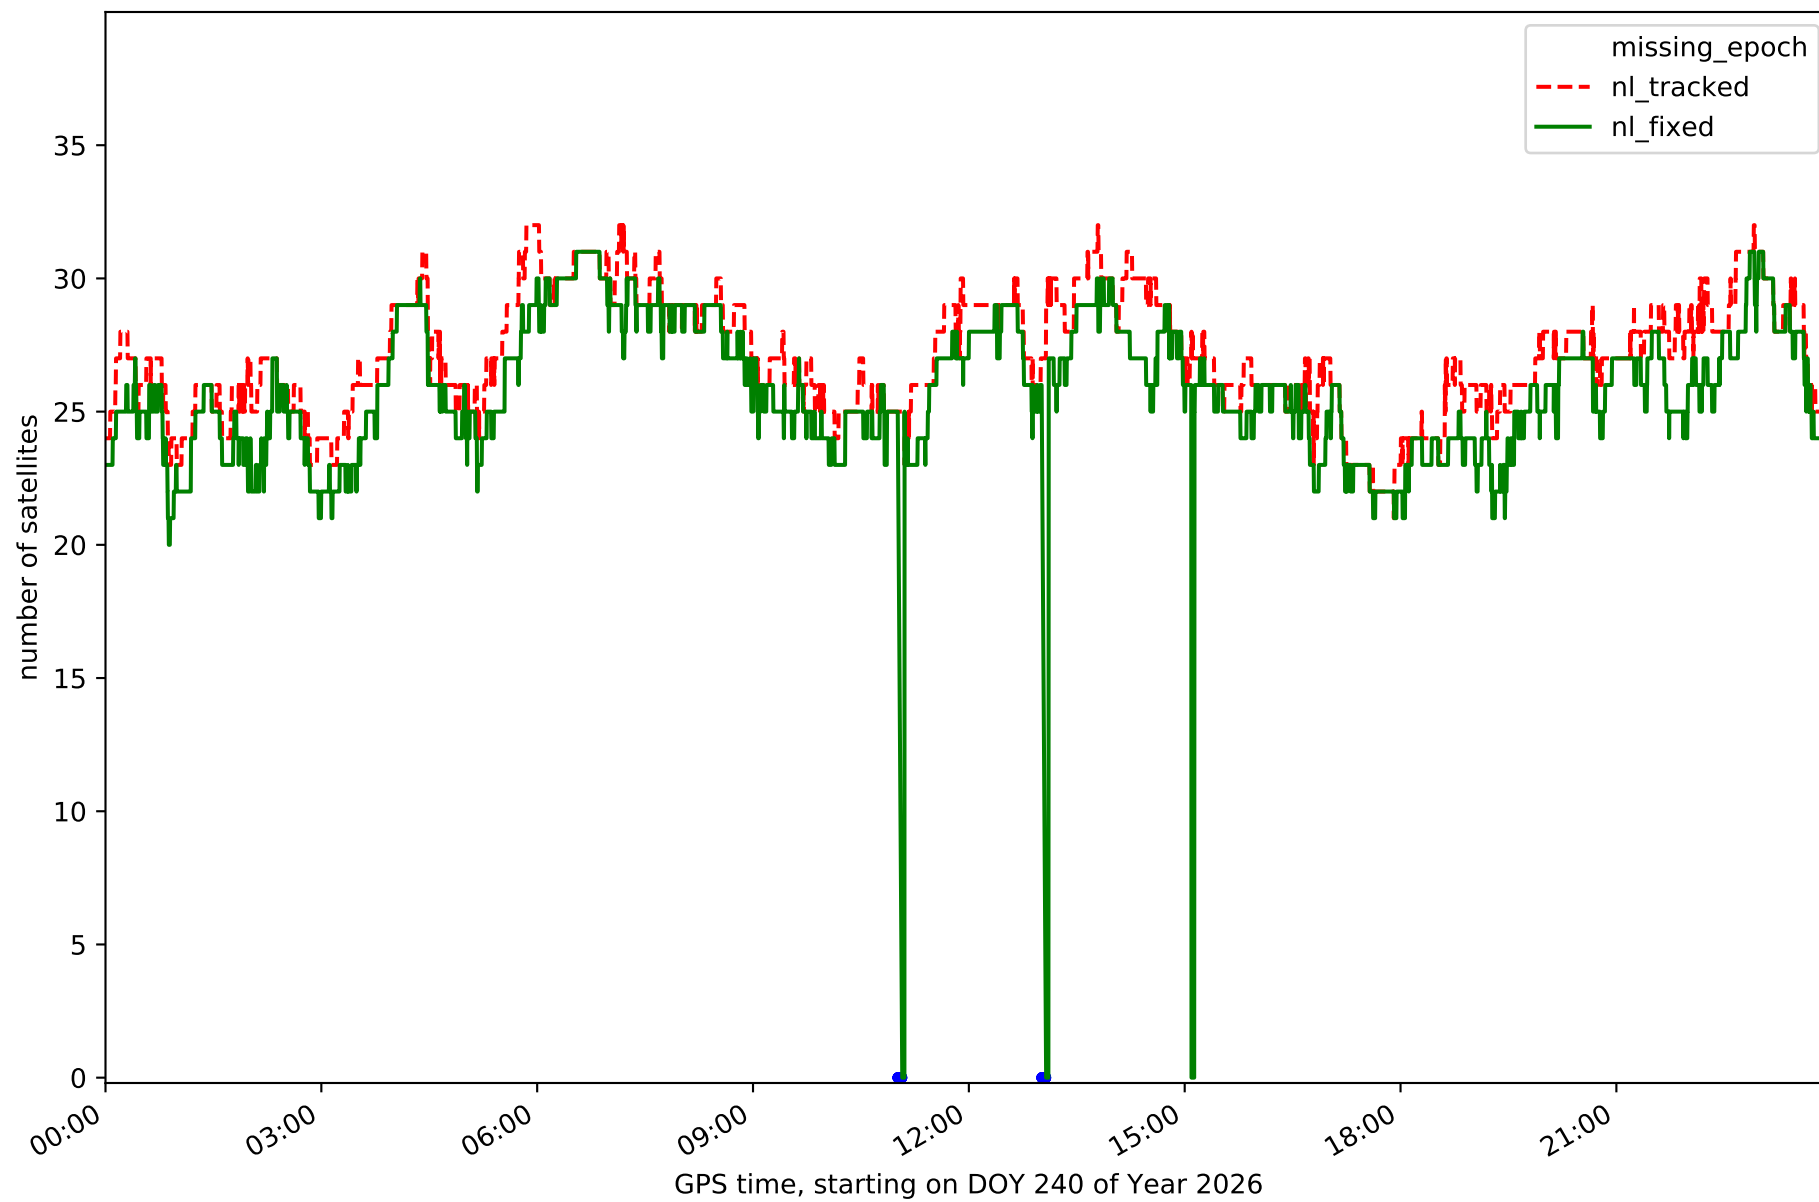


Station TE11 in network NT32

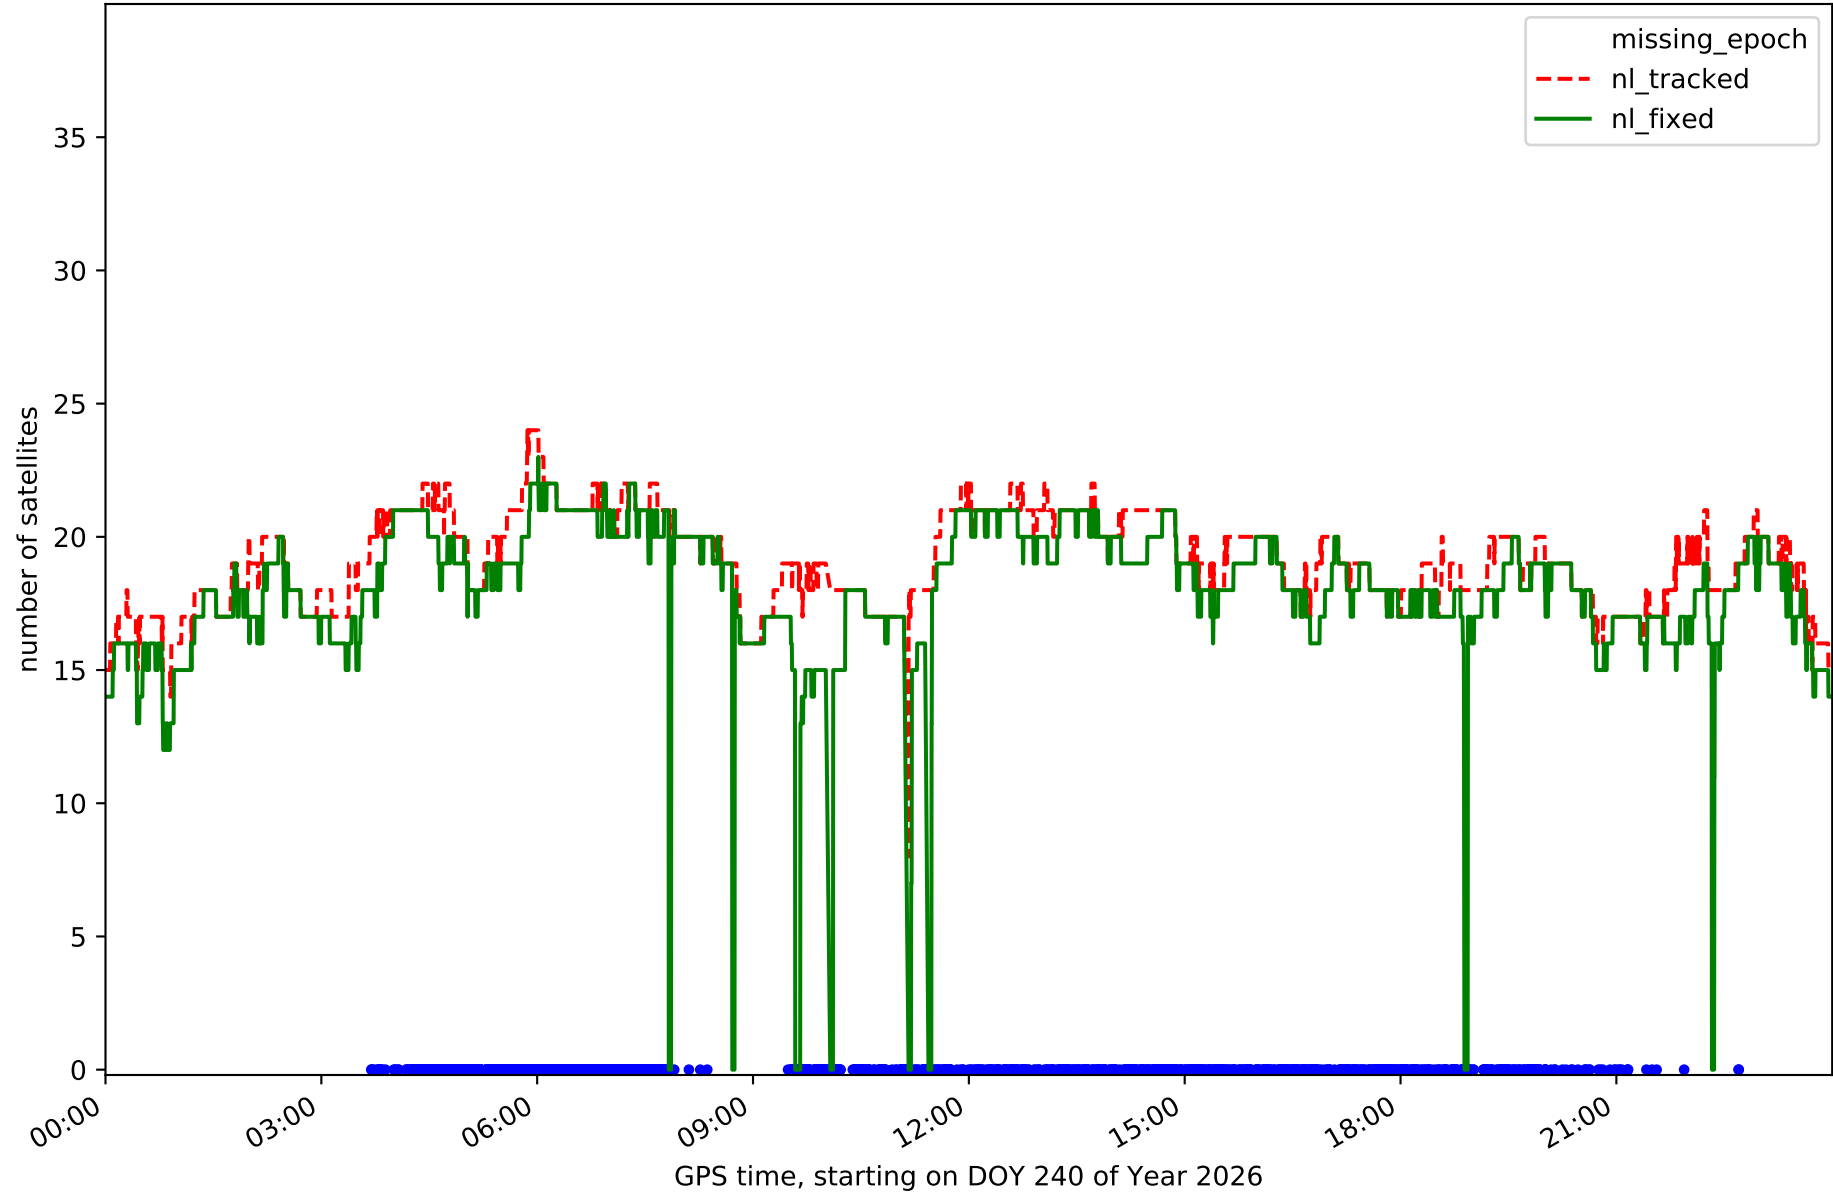


RefCheck for station EH01 in network NT32

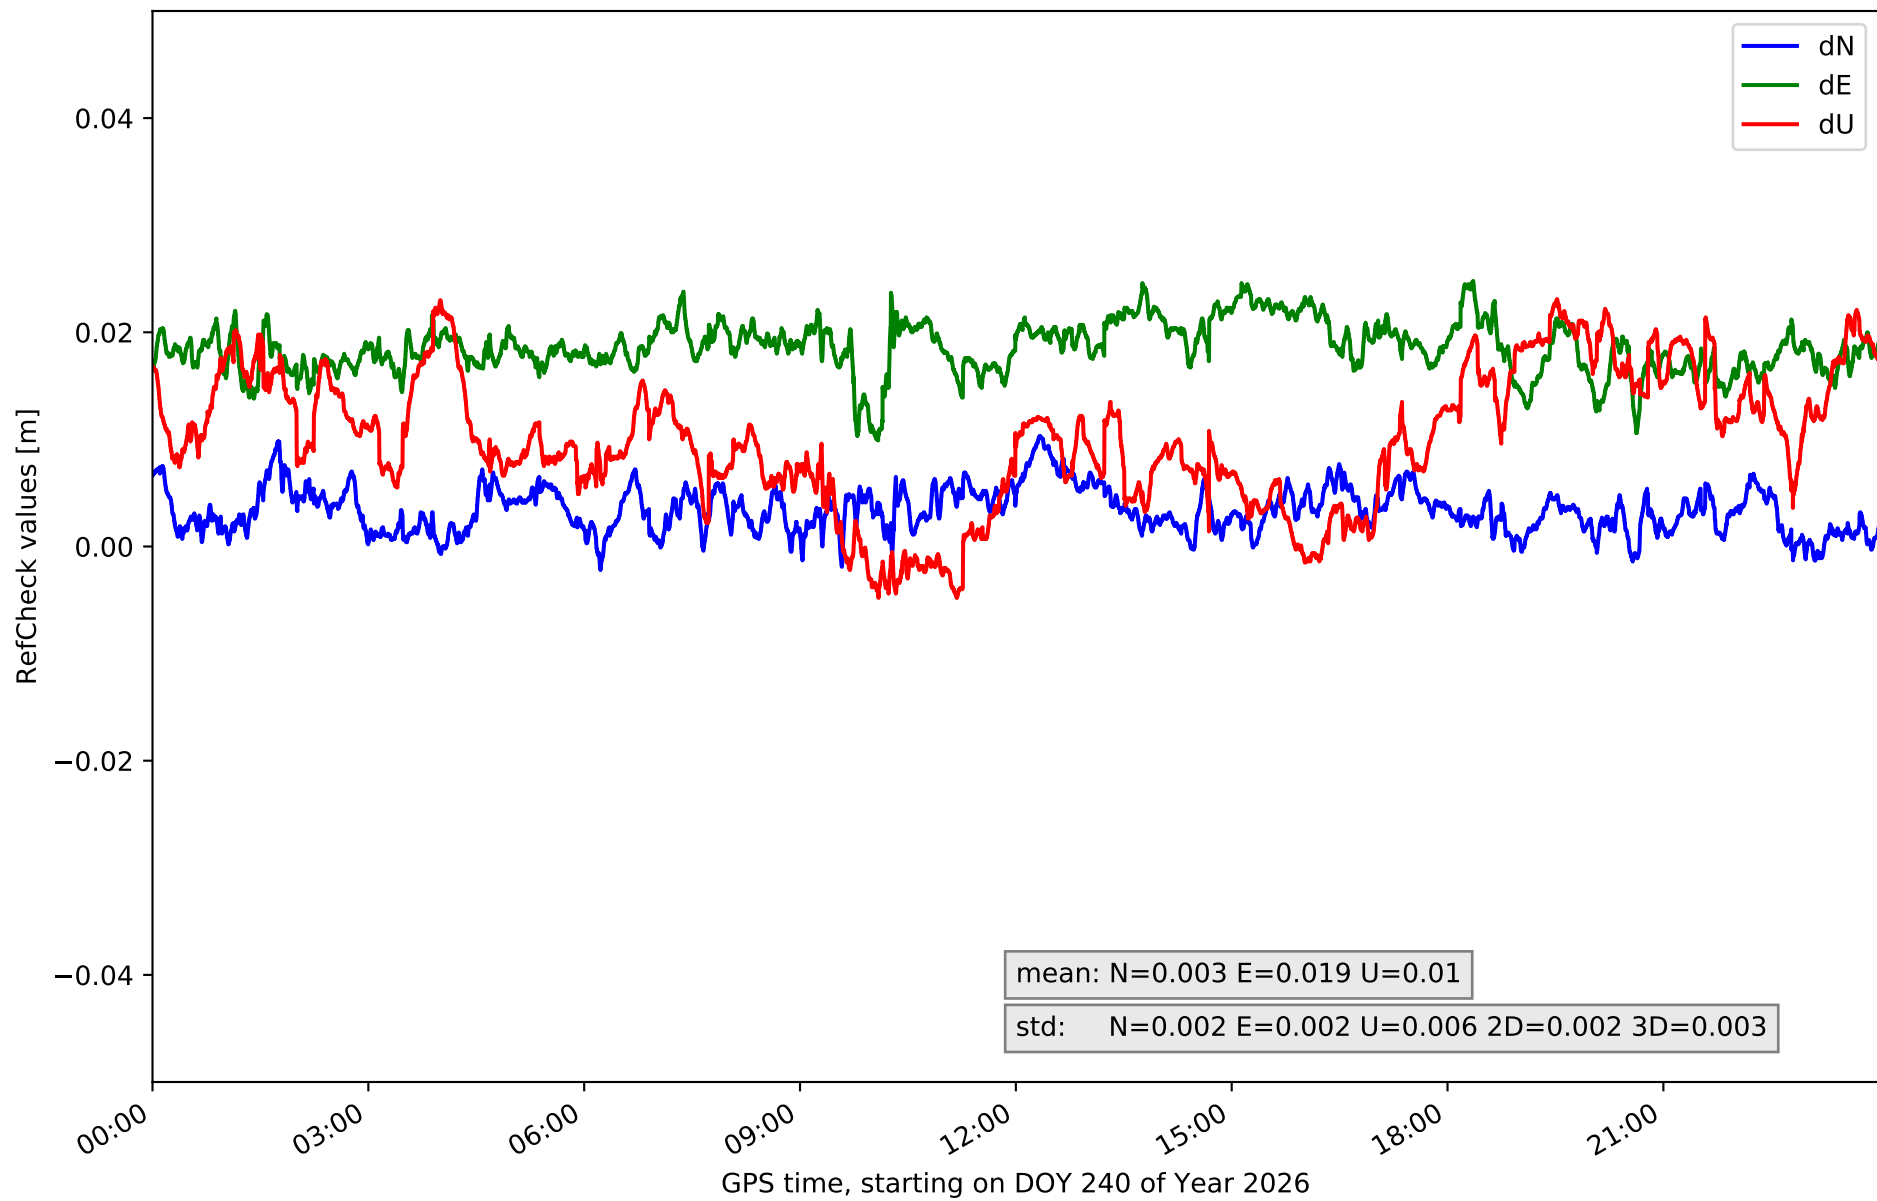


RefCheck for station EH02 in network NT32

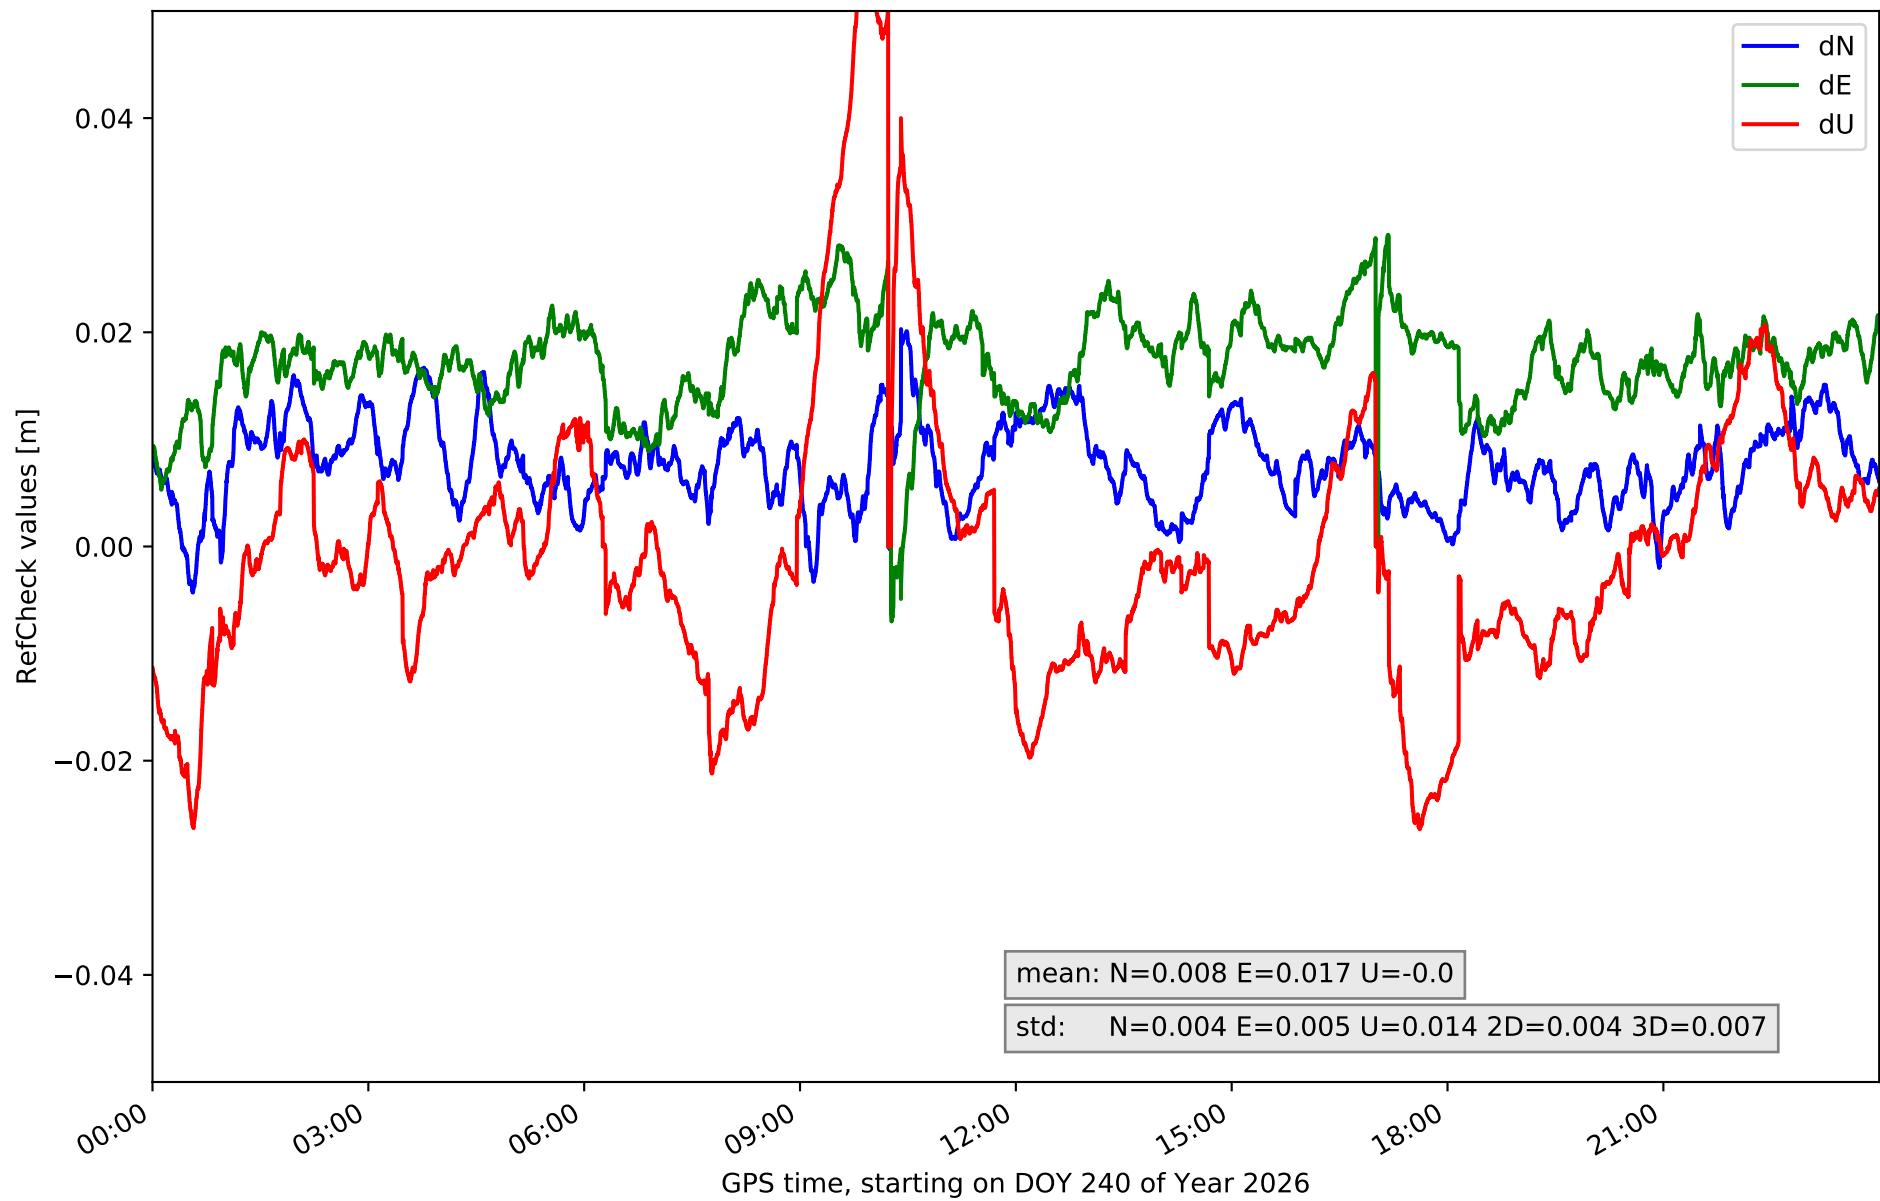


RefCheck for station GOM1 in network NT32

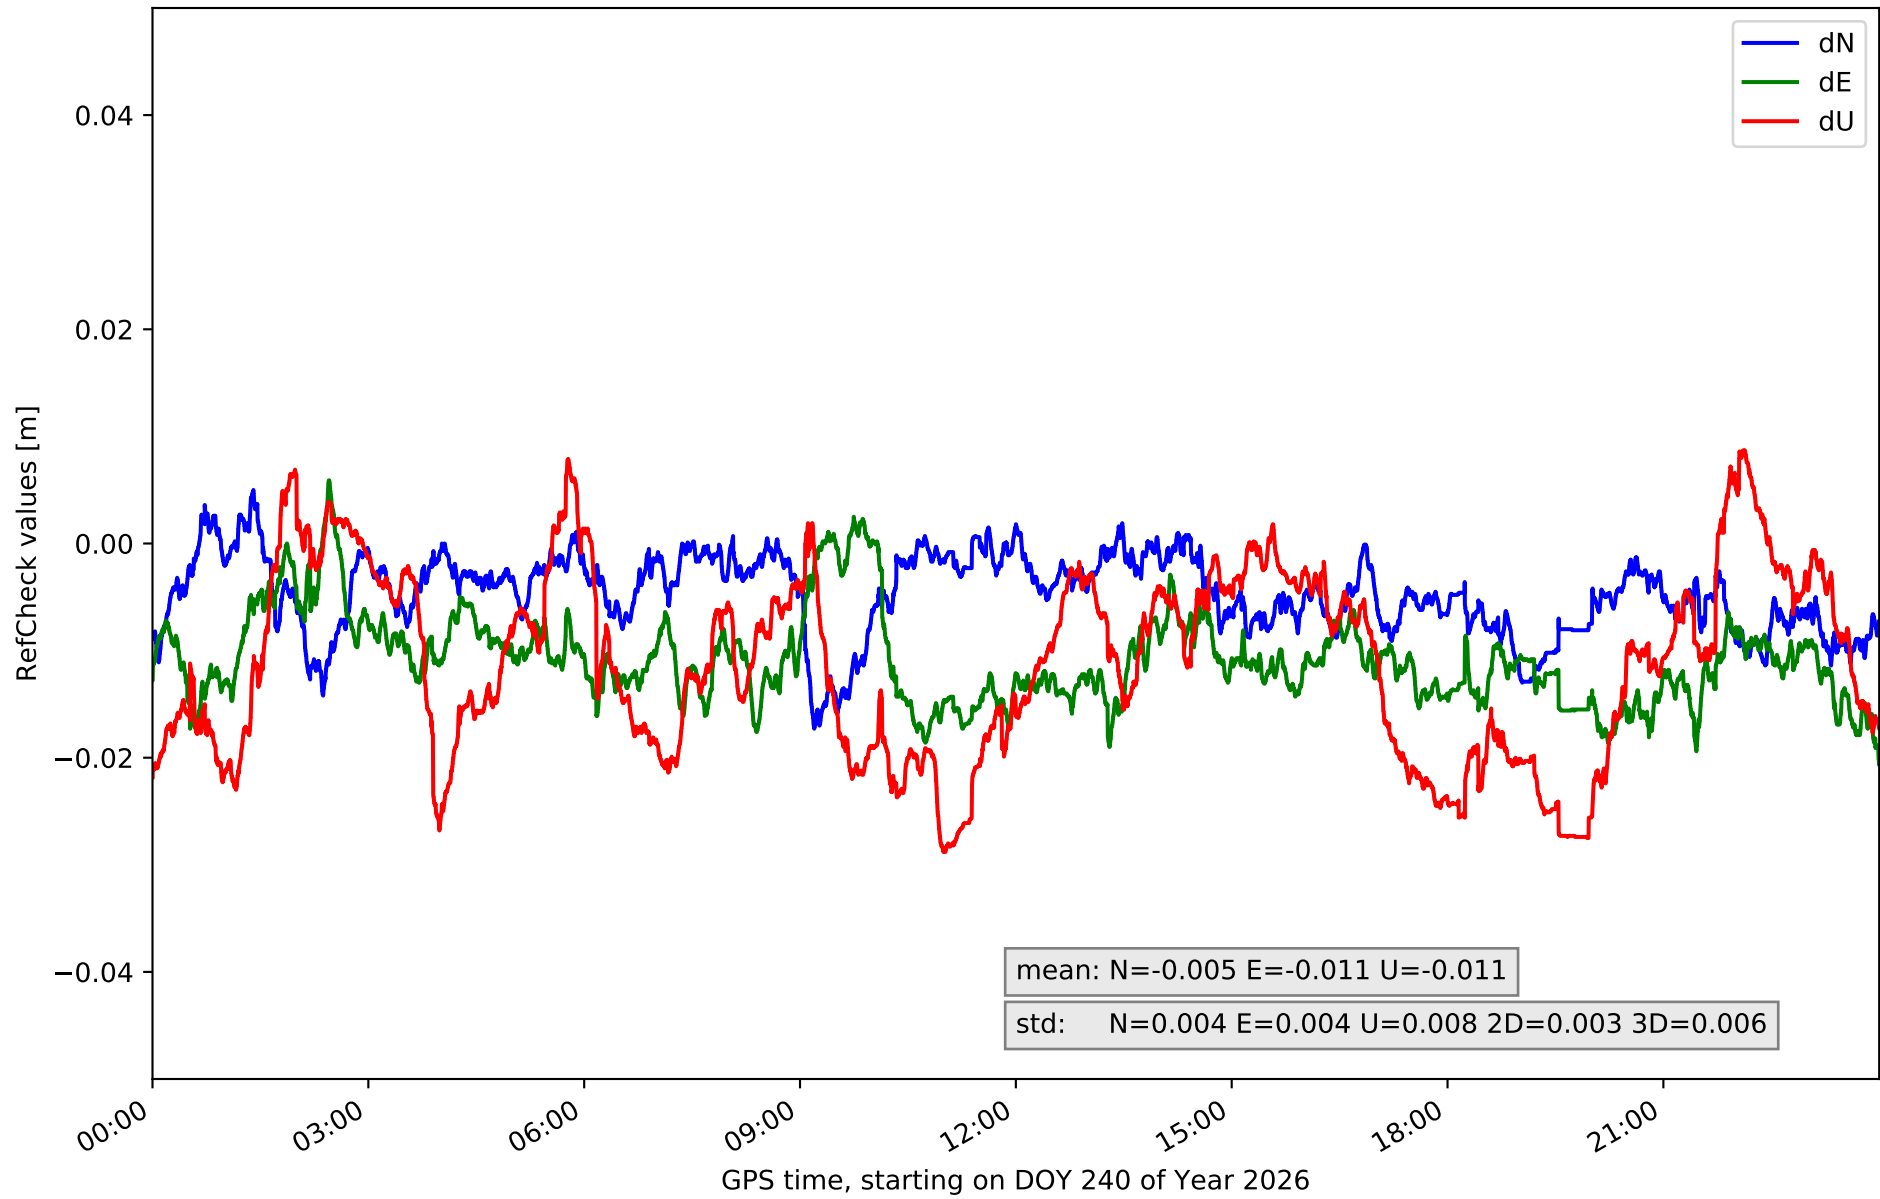


RefCheck for station GOME in network NT32

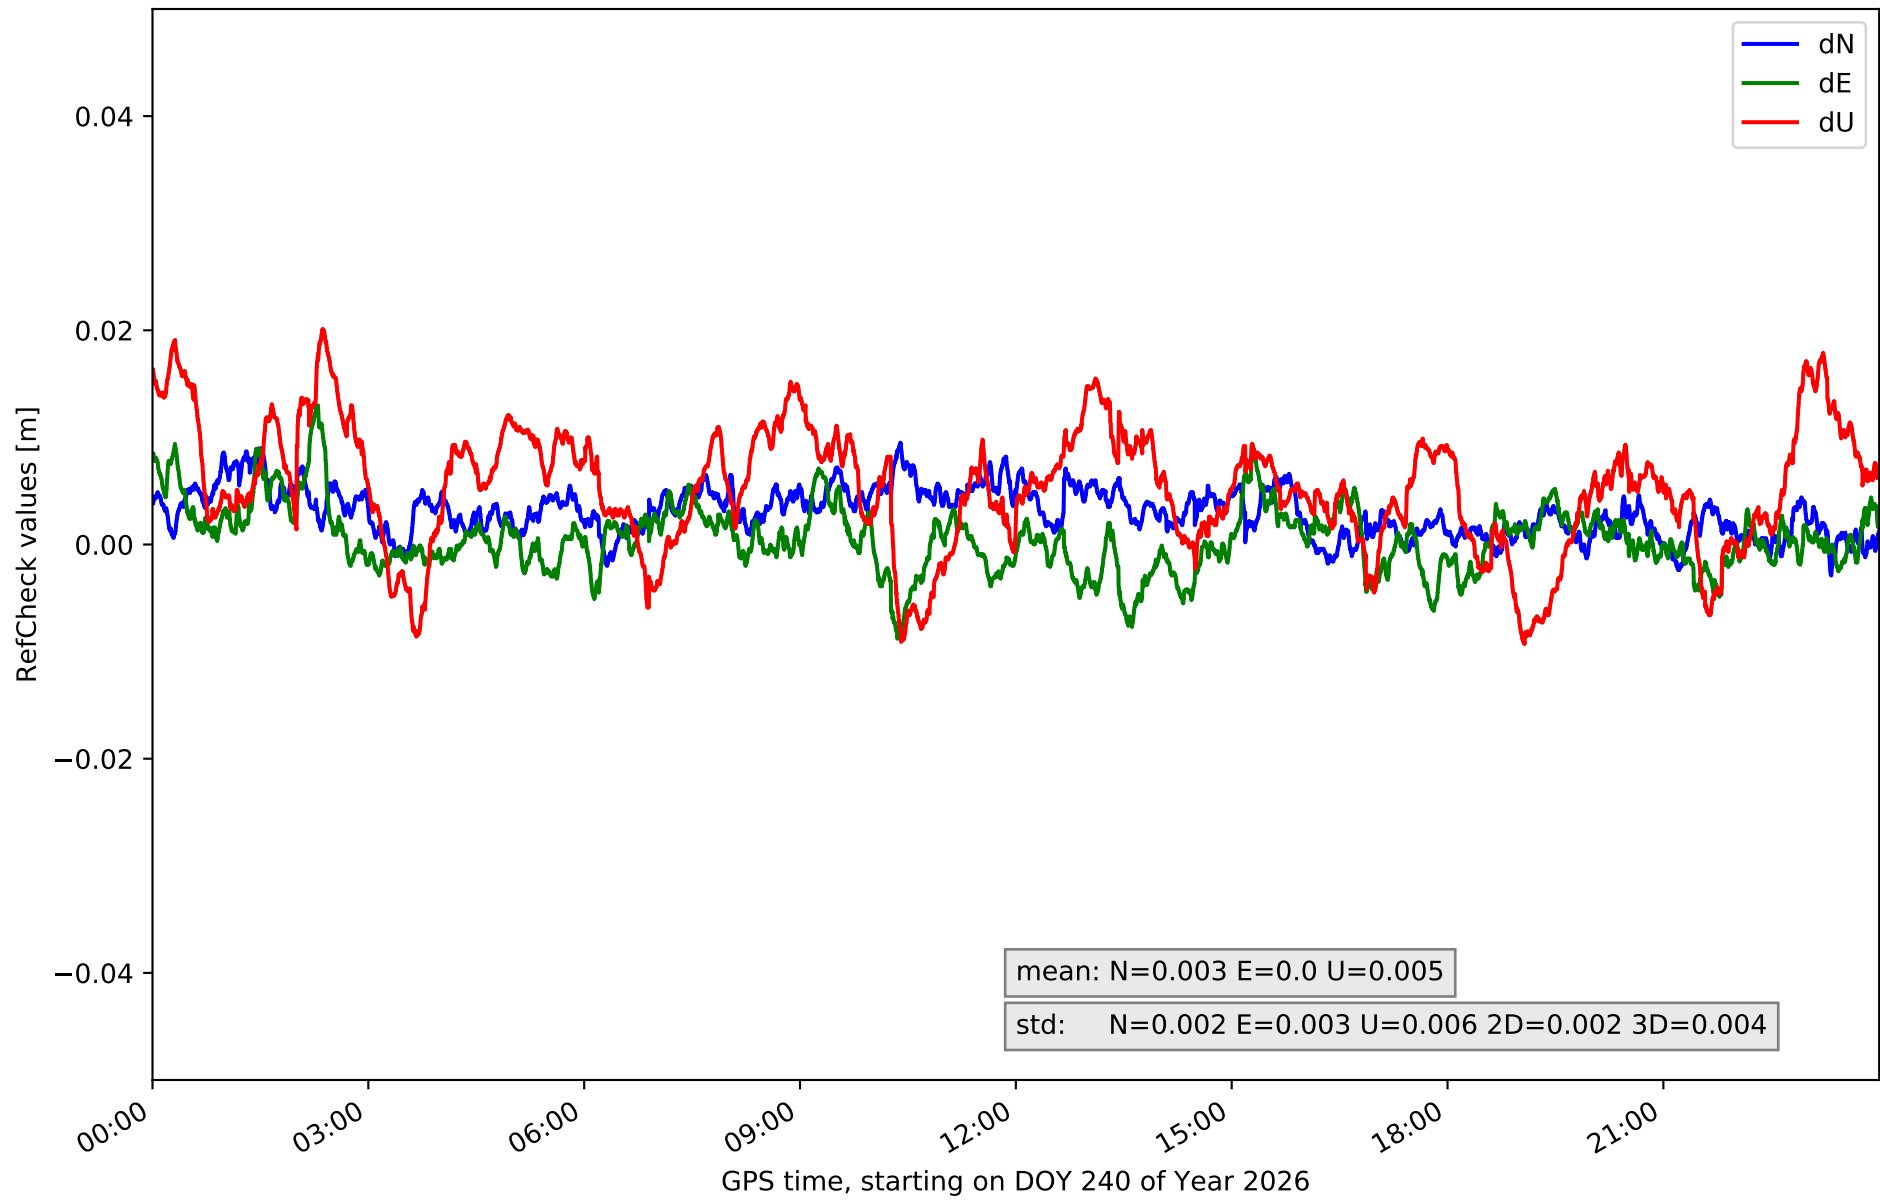


RefCheck for station IZAN in network NT32

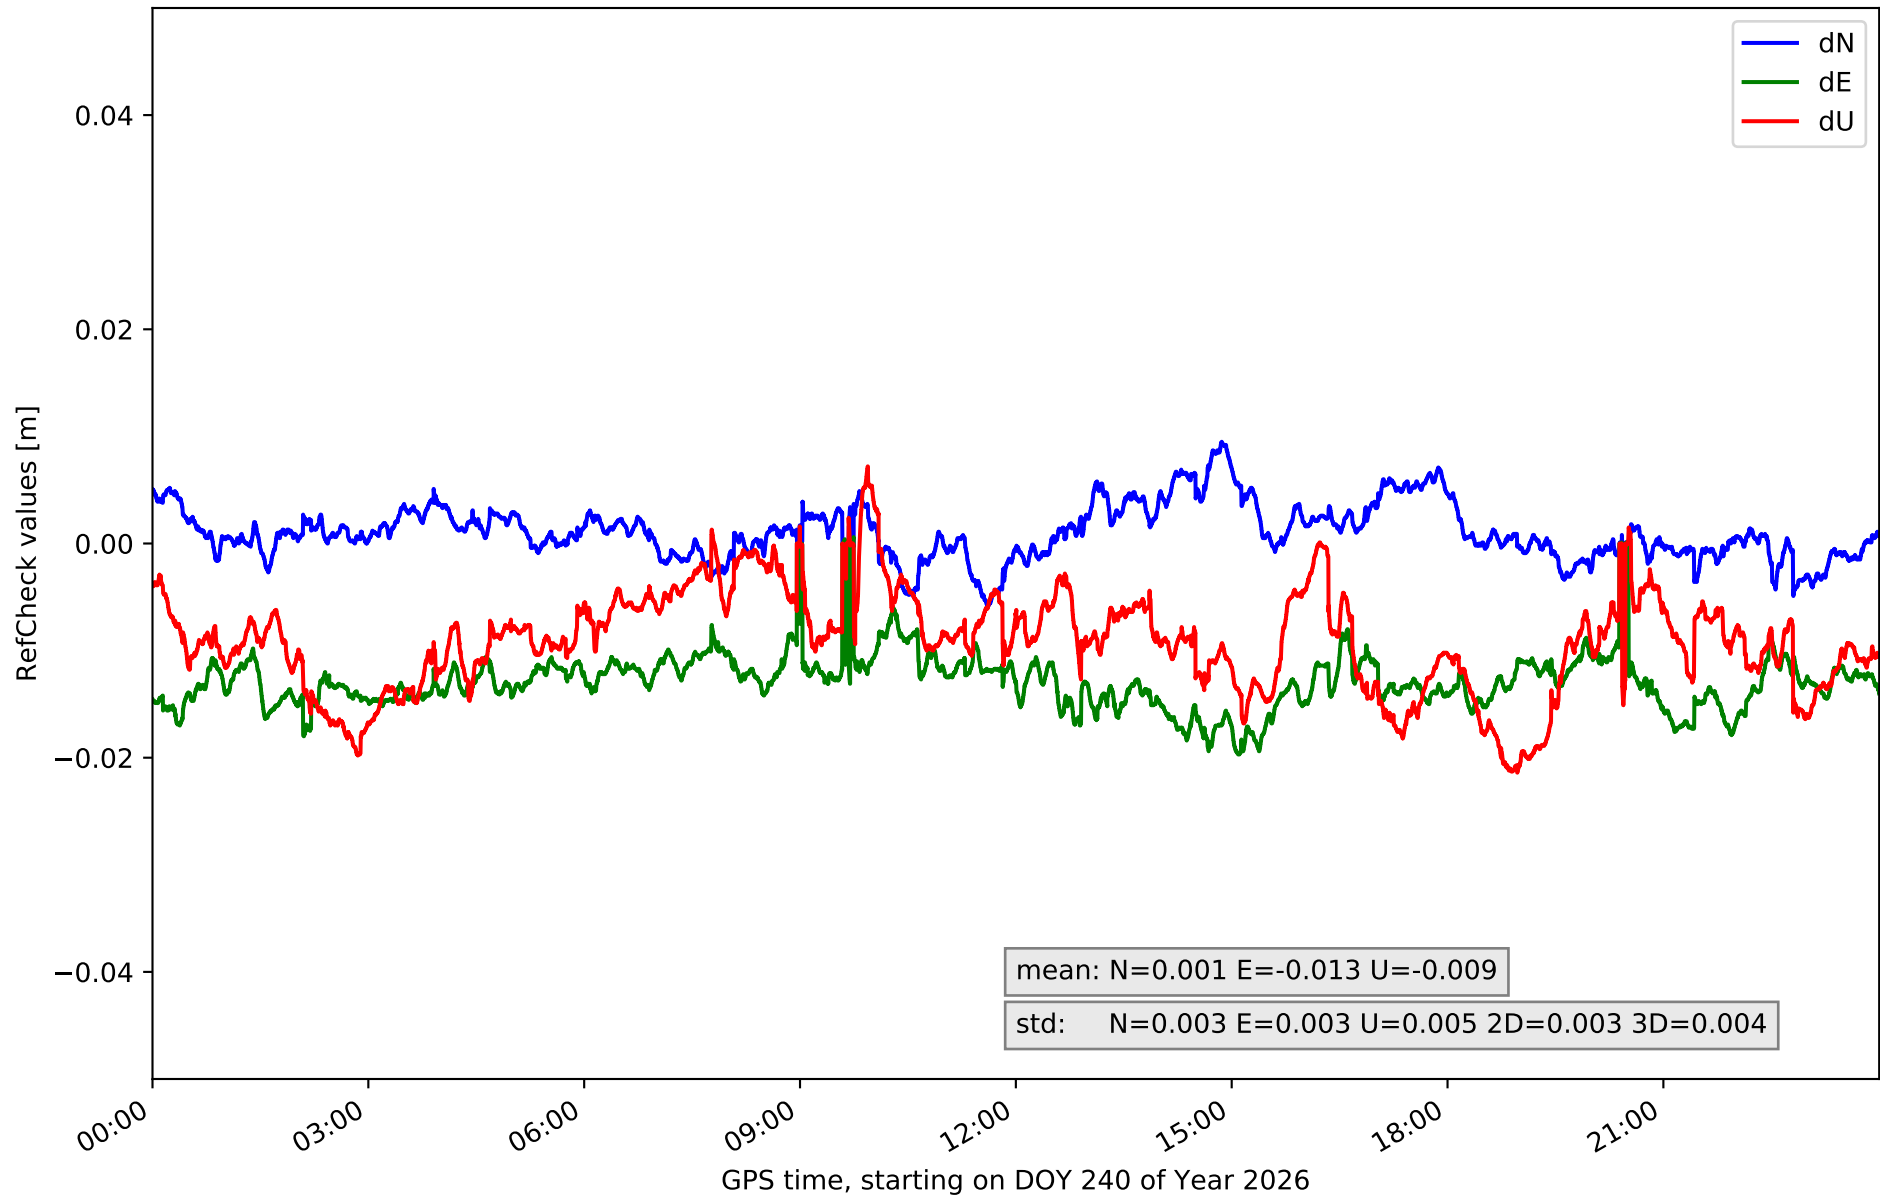


RefCheck for station LP01 in network NT32

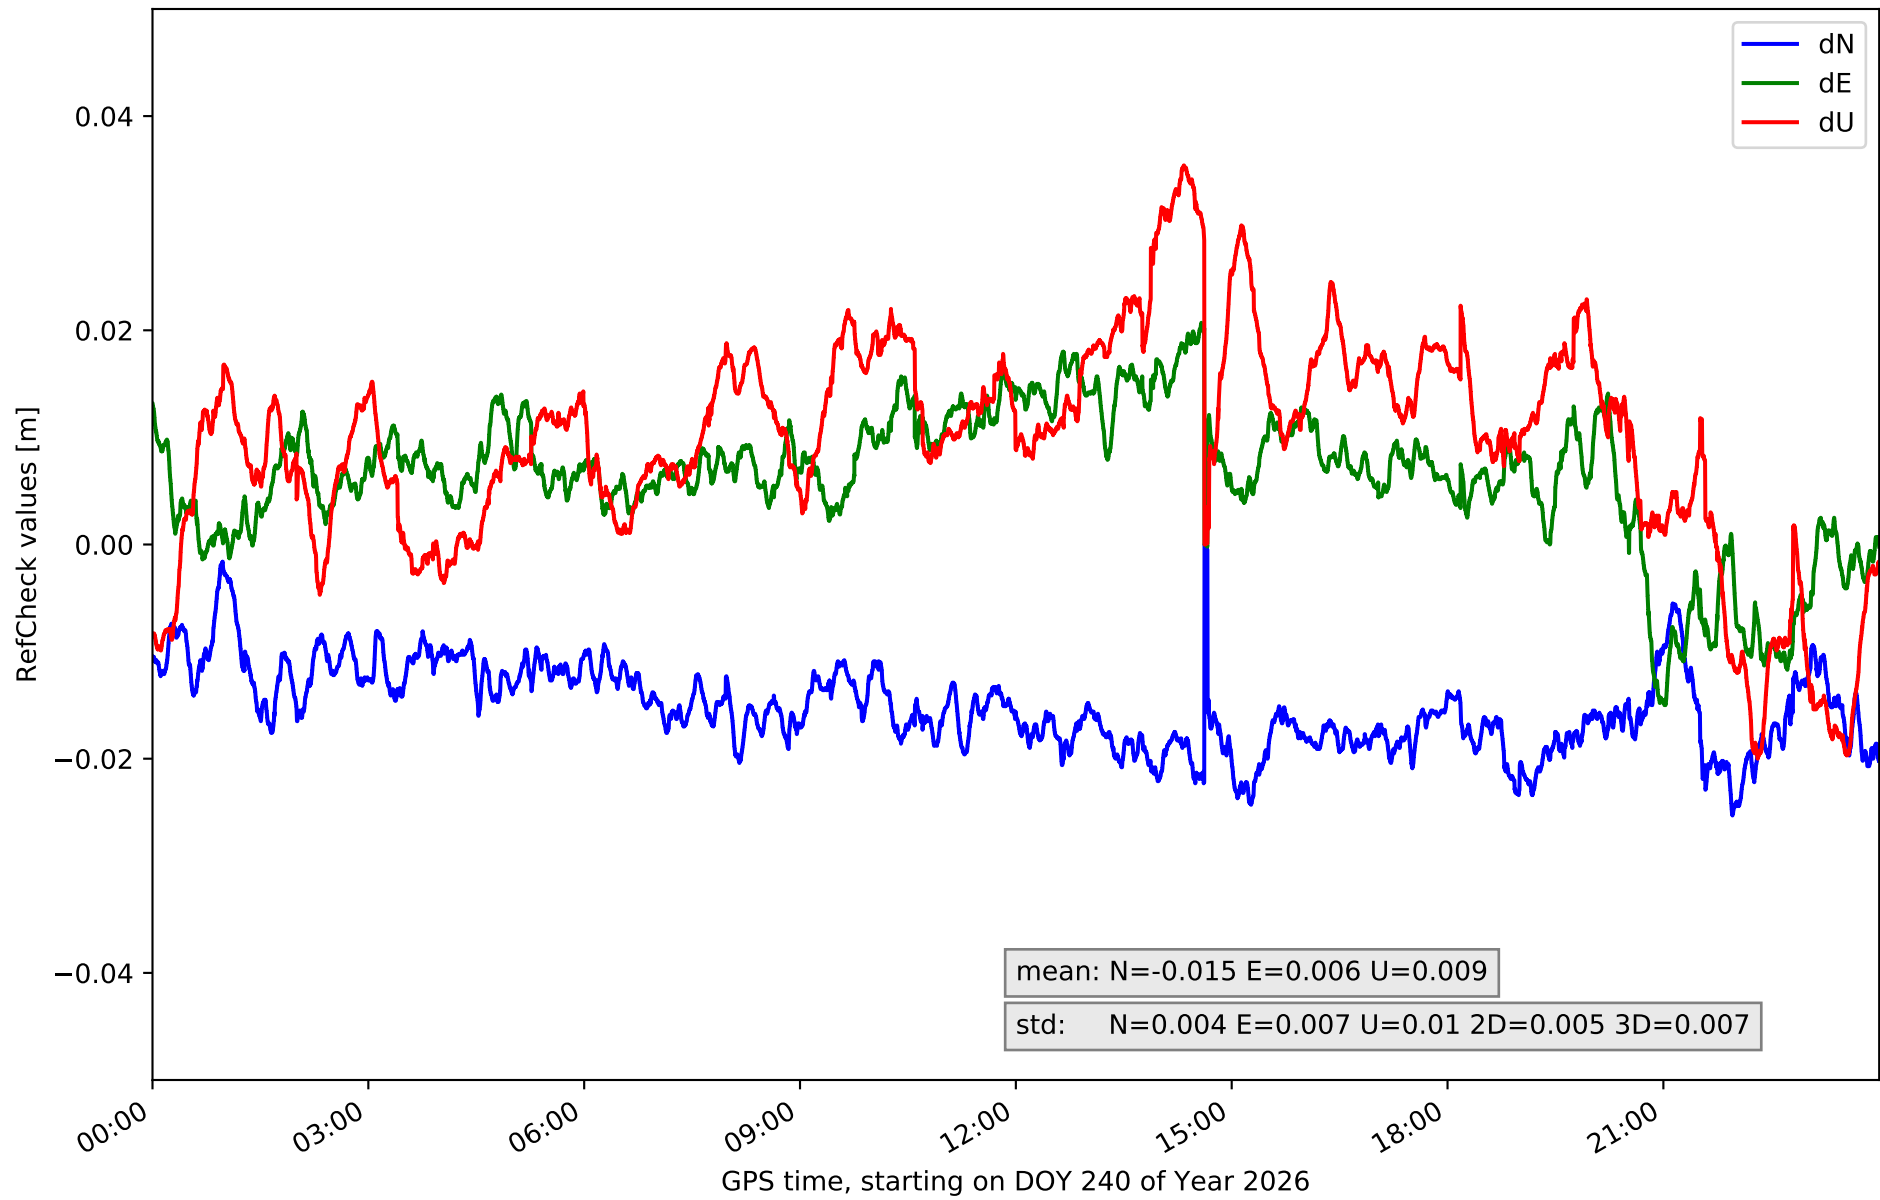


RefCheck for station LP03 in network NT32

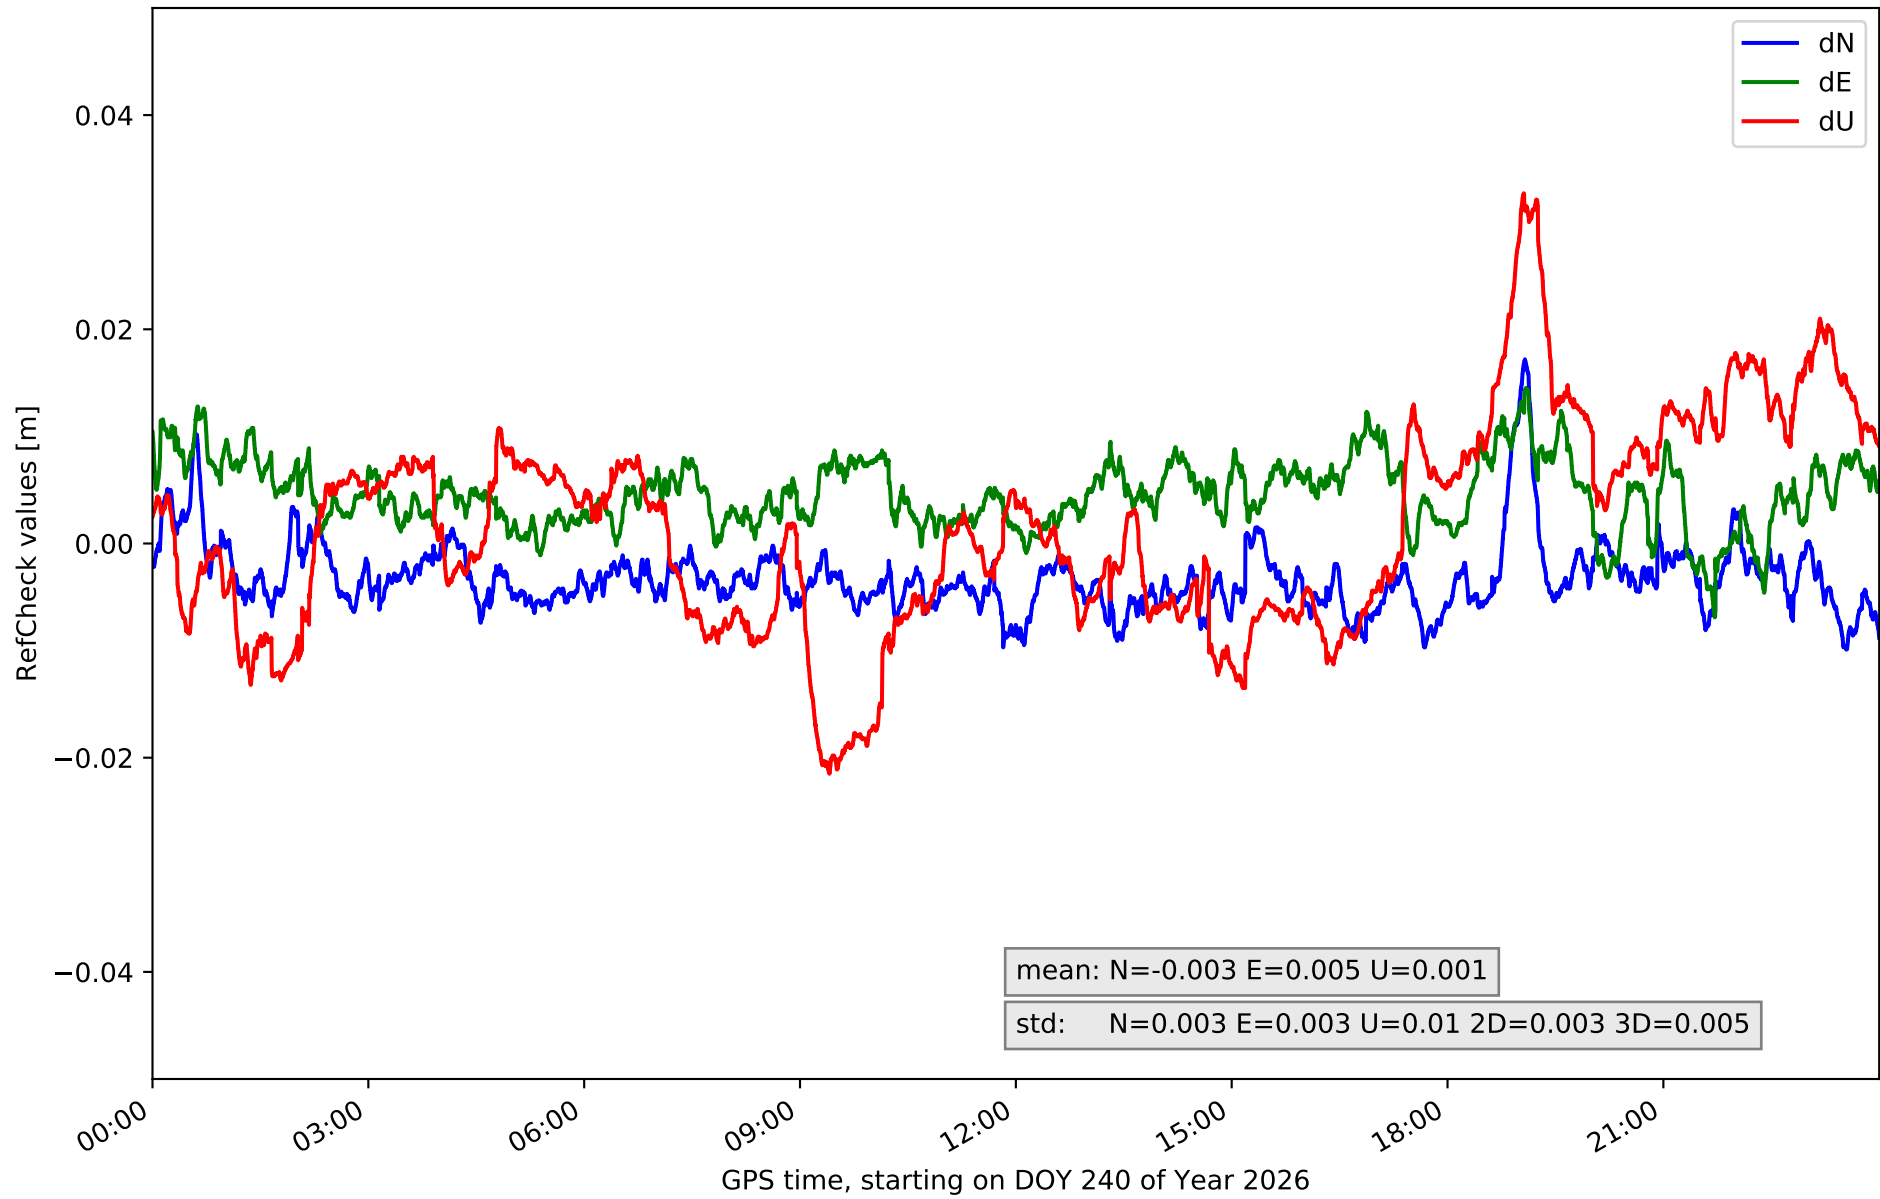


RefCheck for station LPAL in network NT32

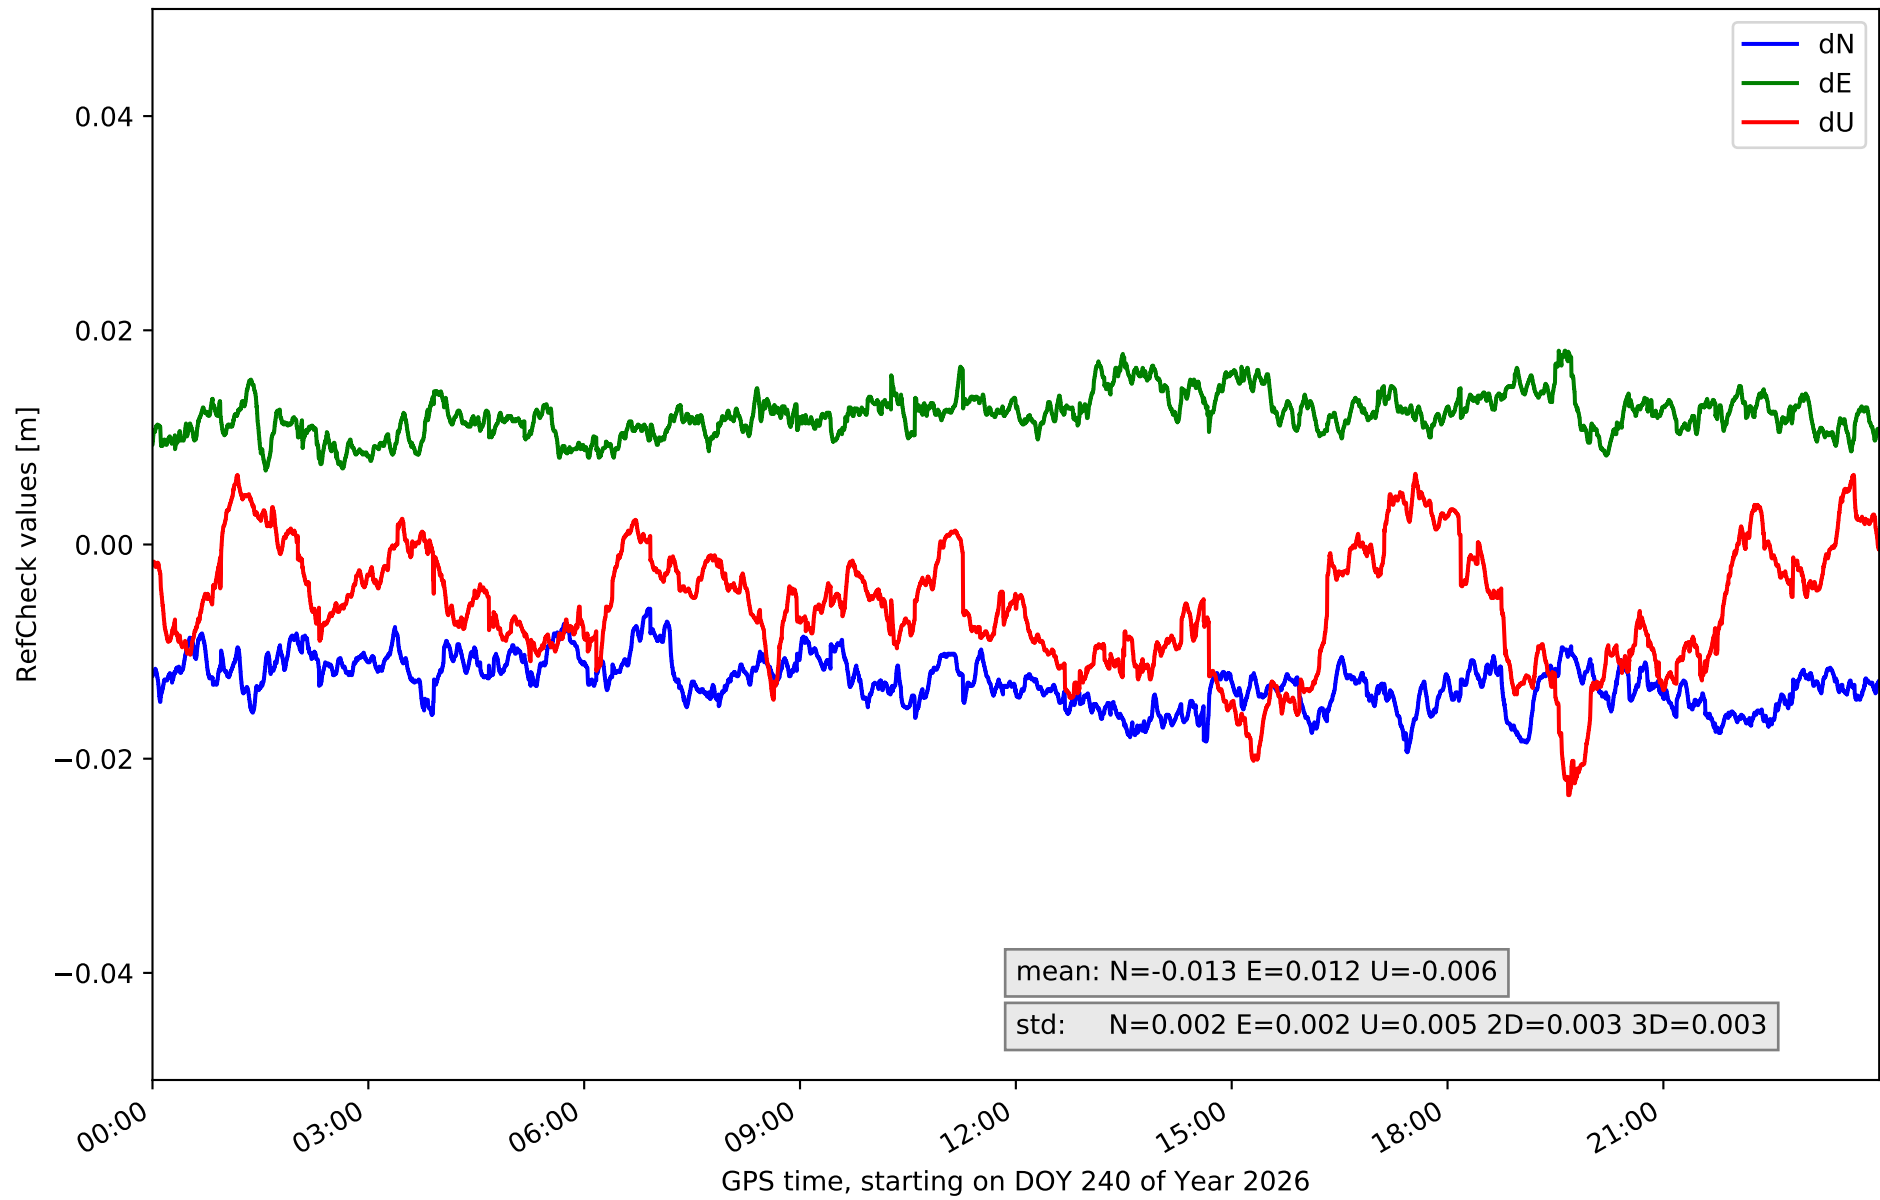


RefCheck for station LRES in network NT32

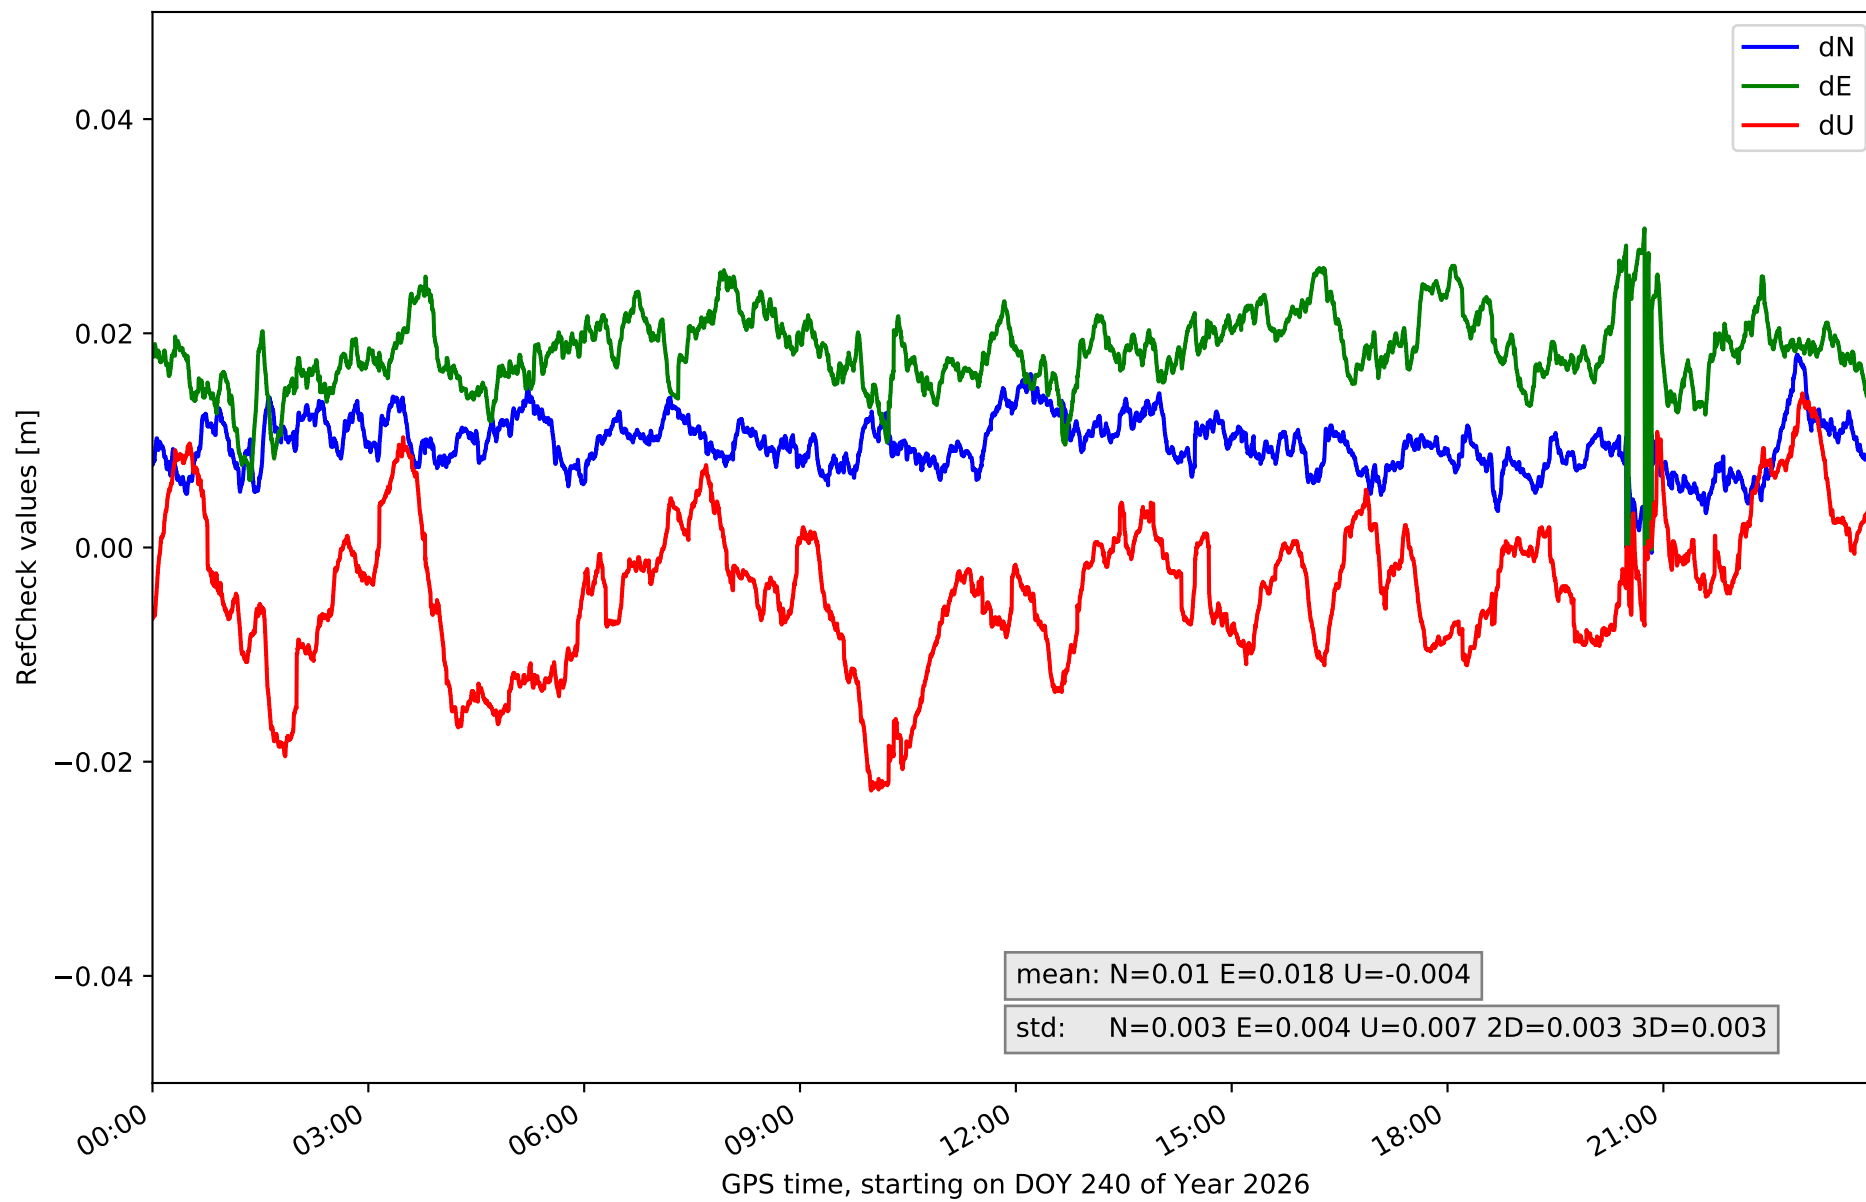


RefCheck for station TN01 in network NT32

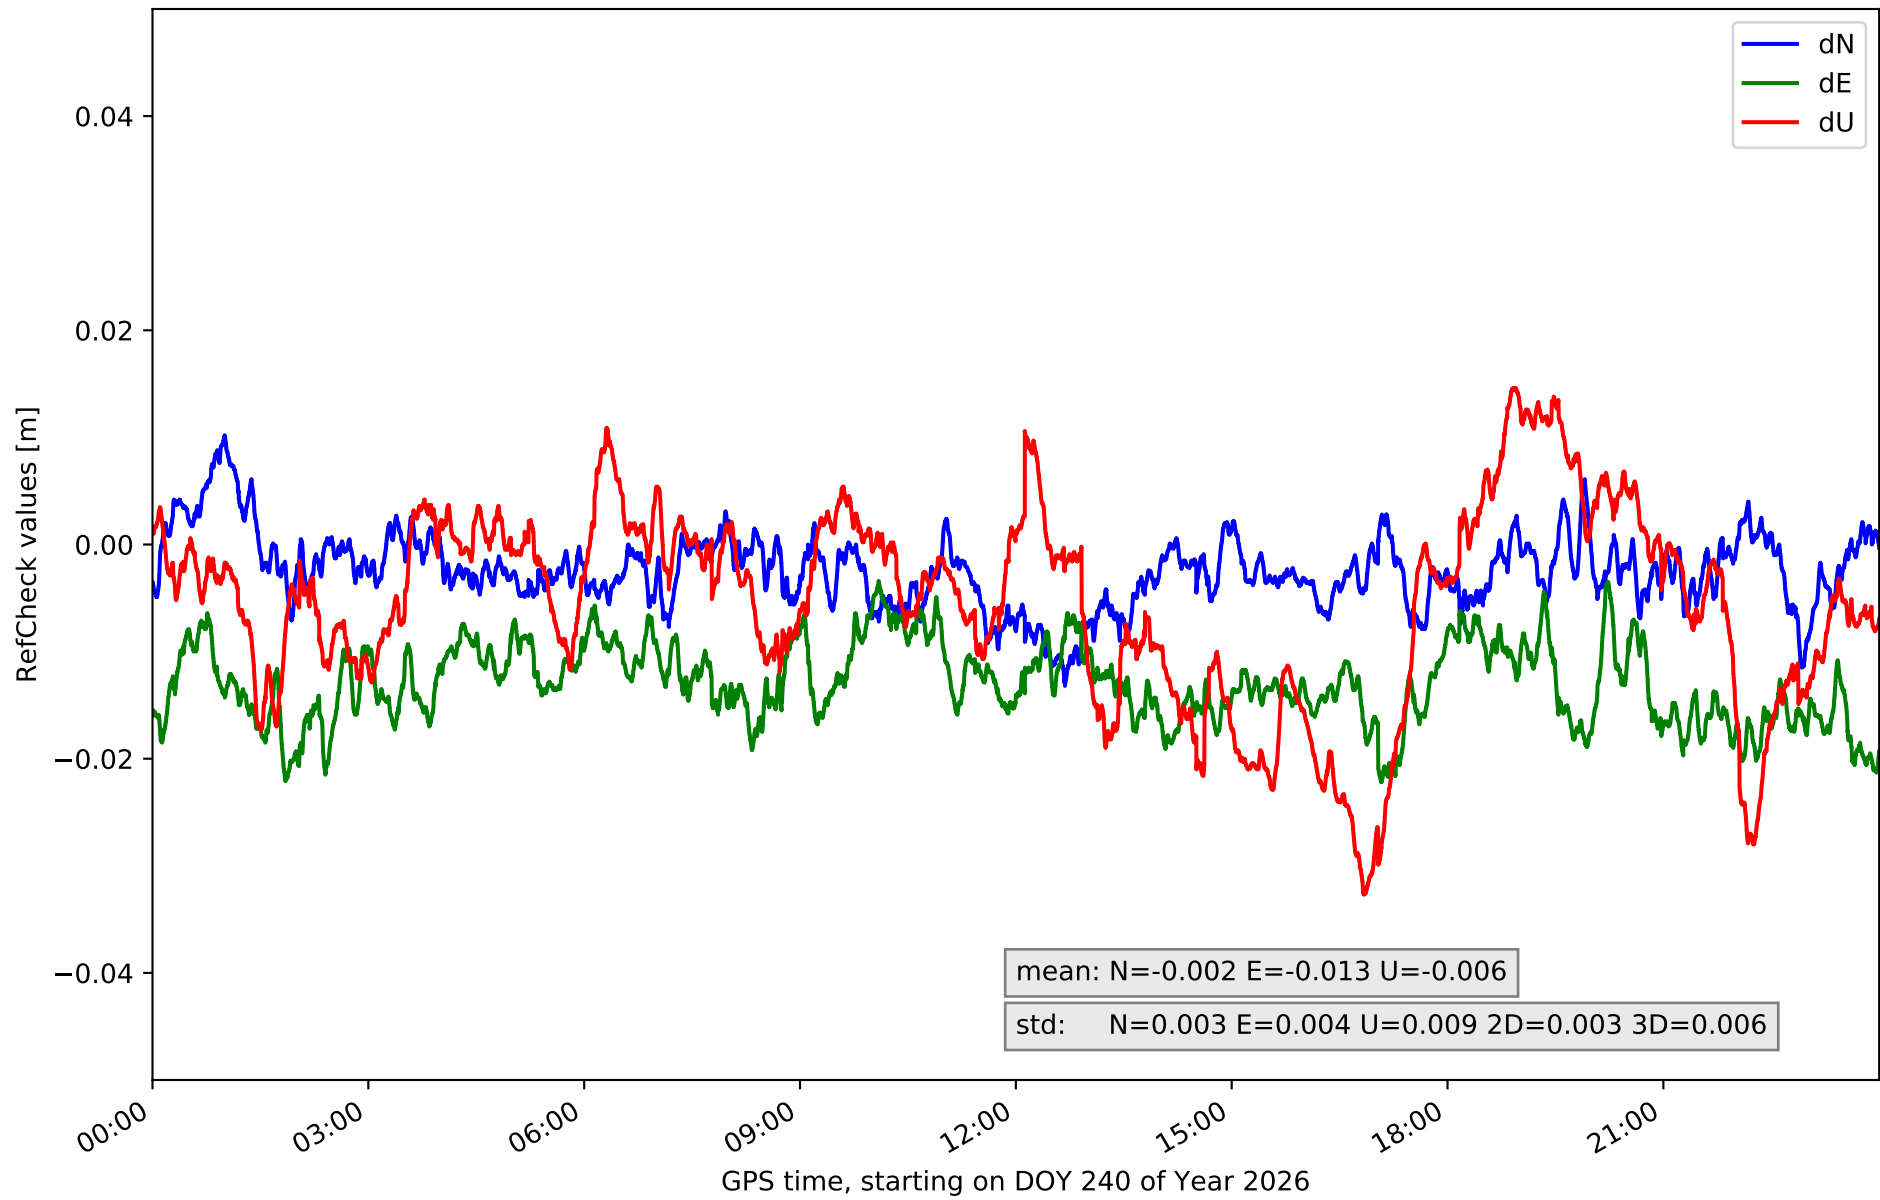


RefCheck for station TN02 in network NT32

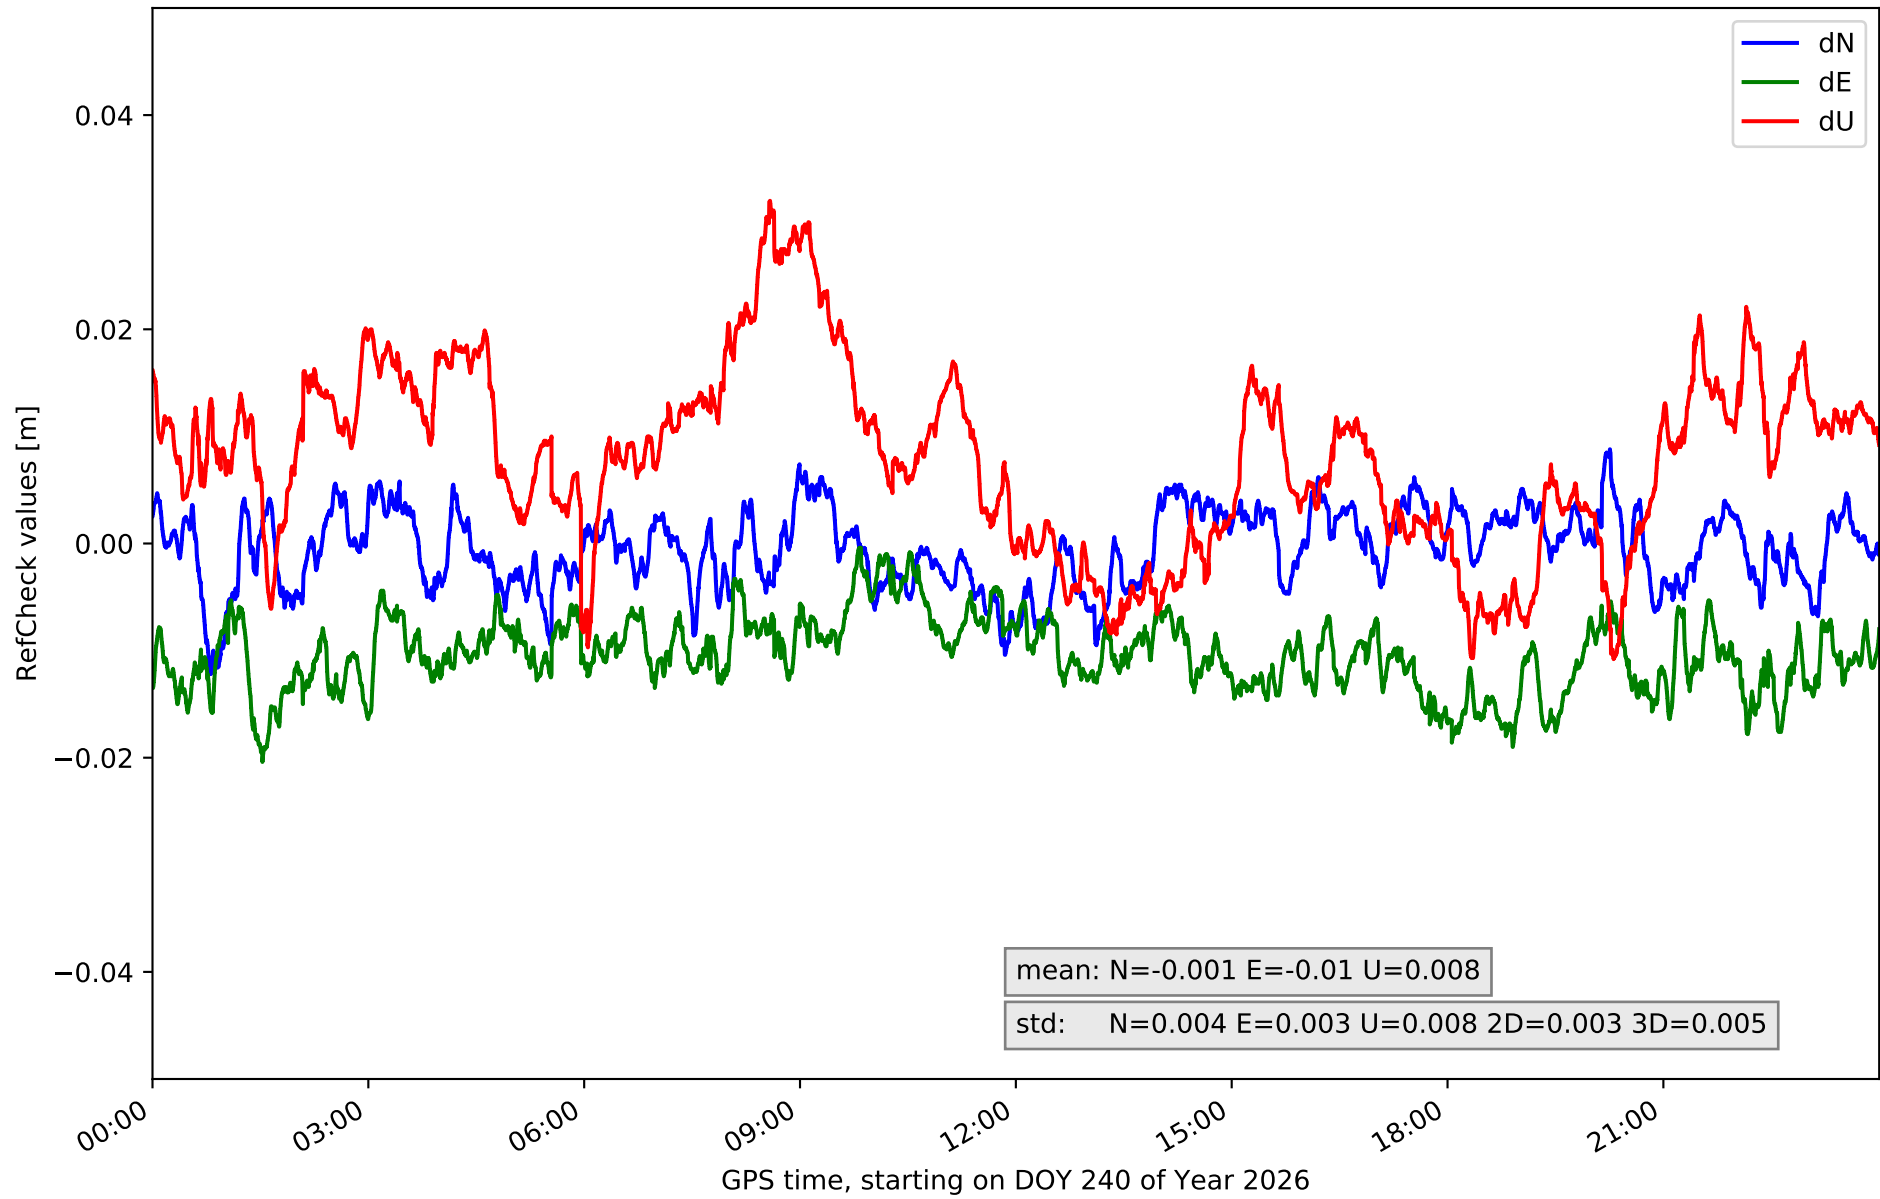


RefCheck for station TN03 in network NT32

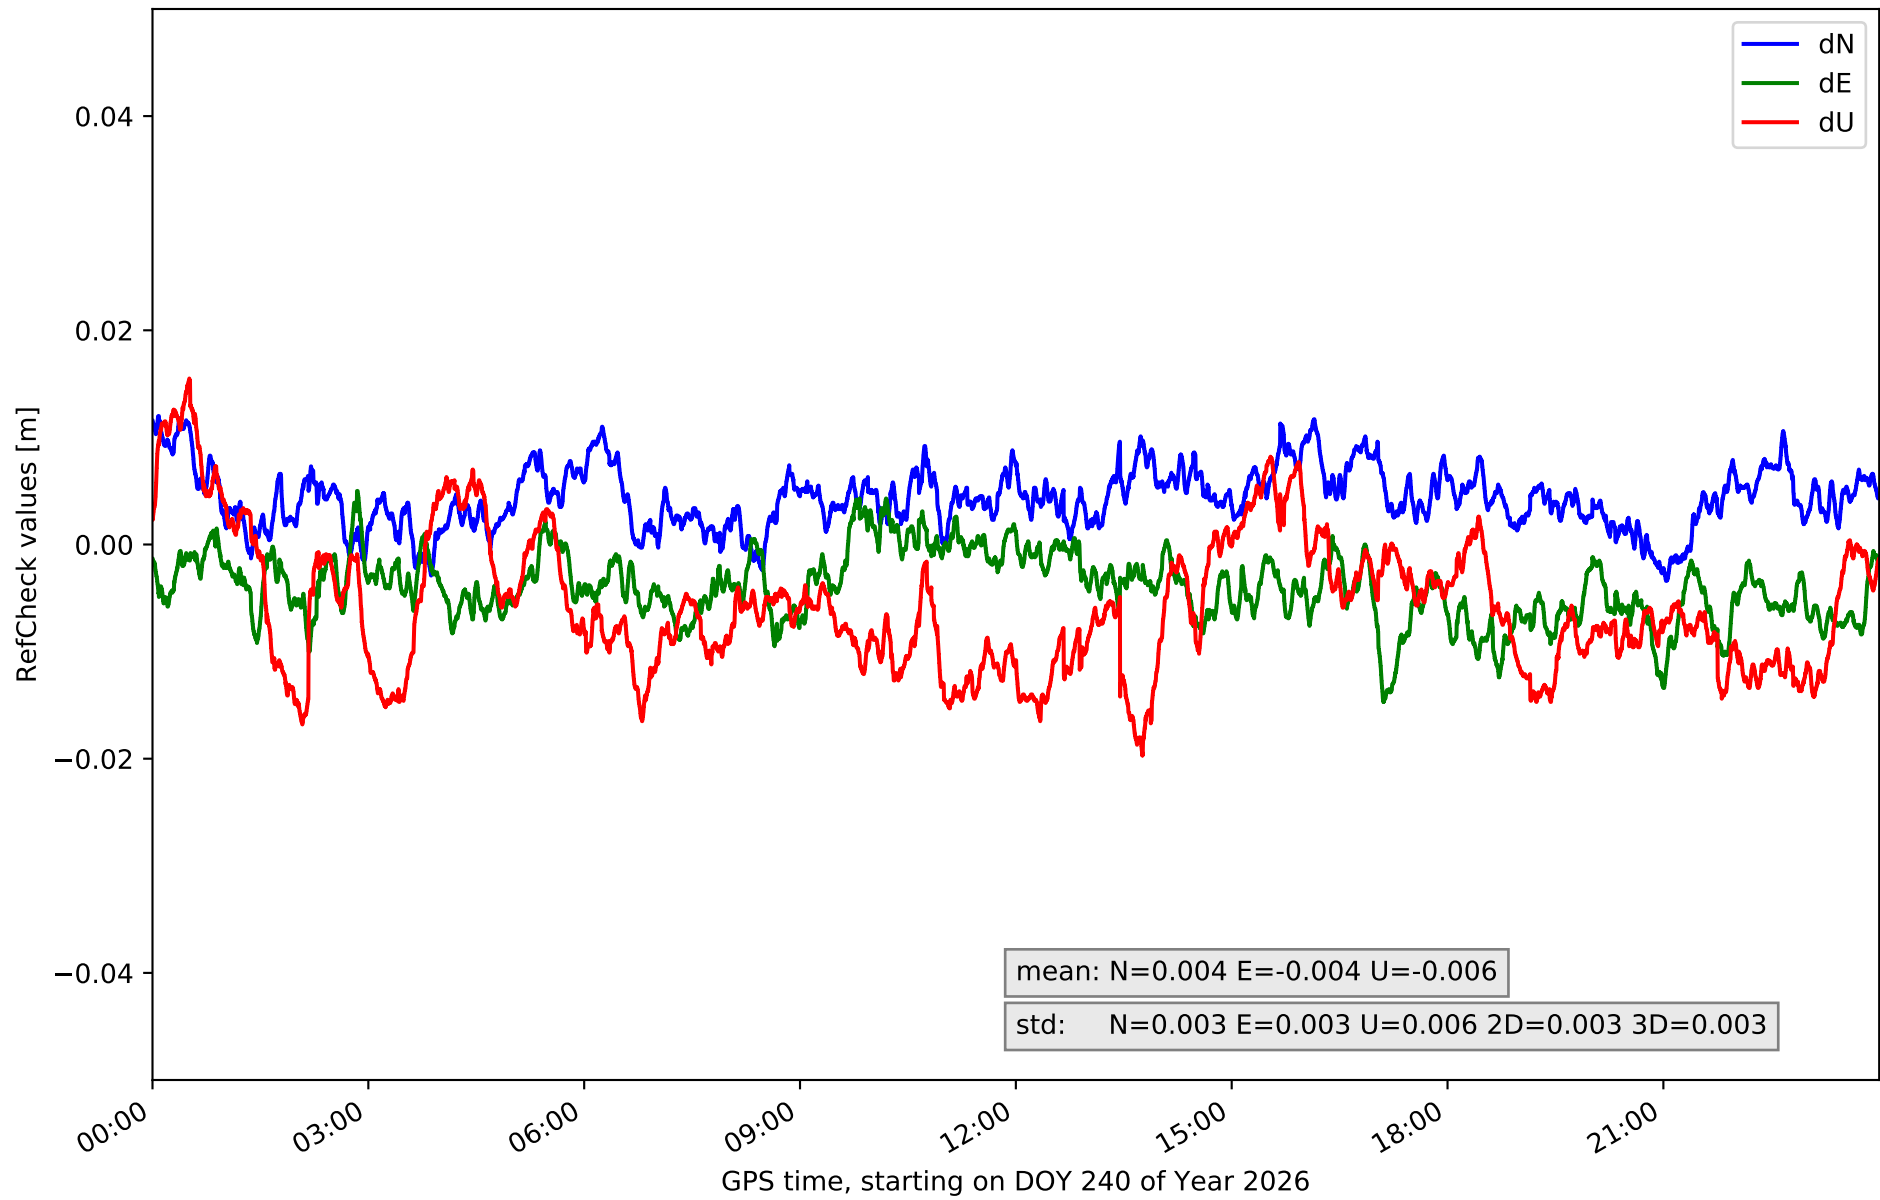


RefCheck for station TN06 in network NT32

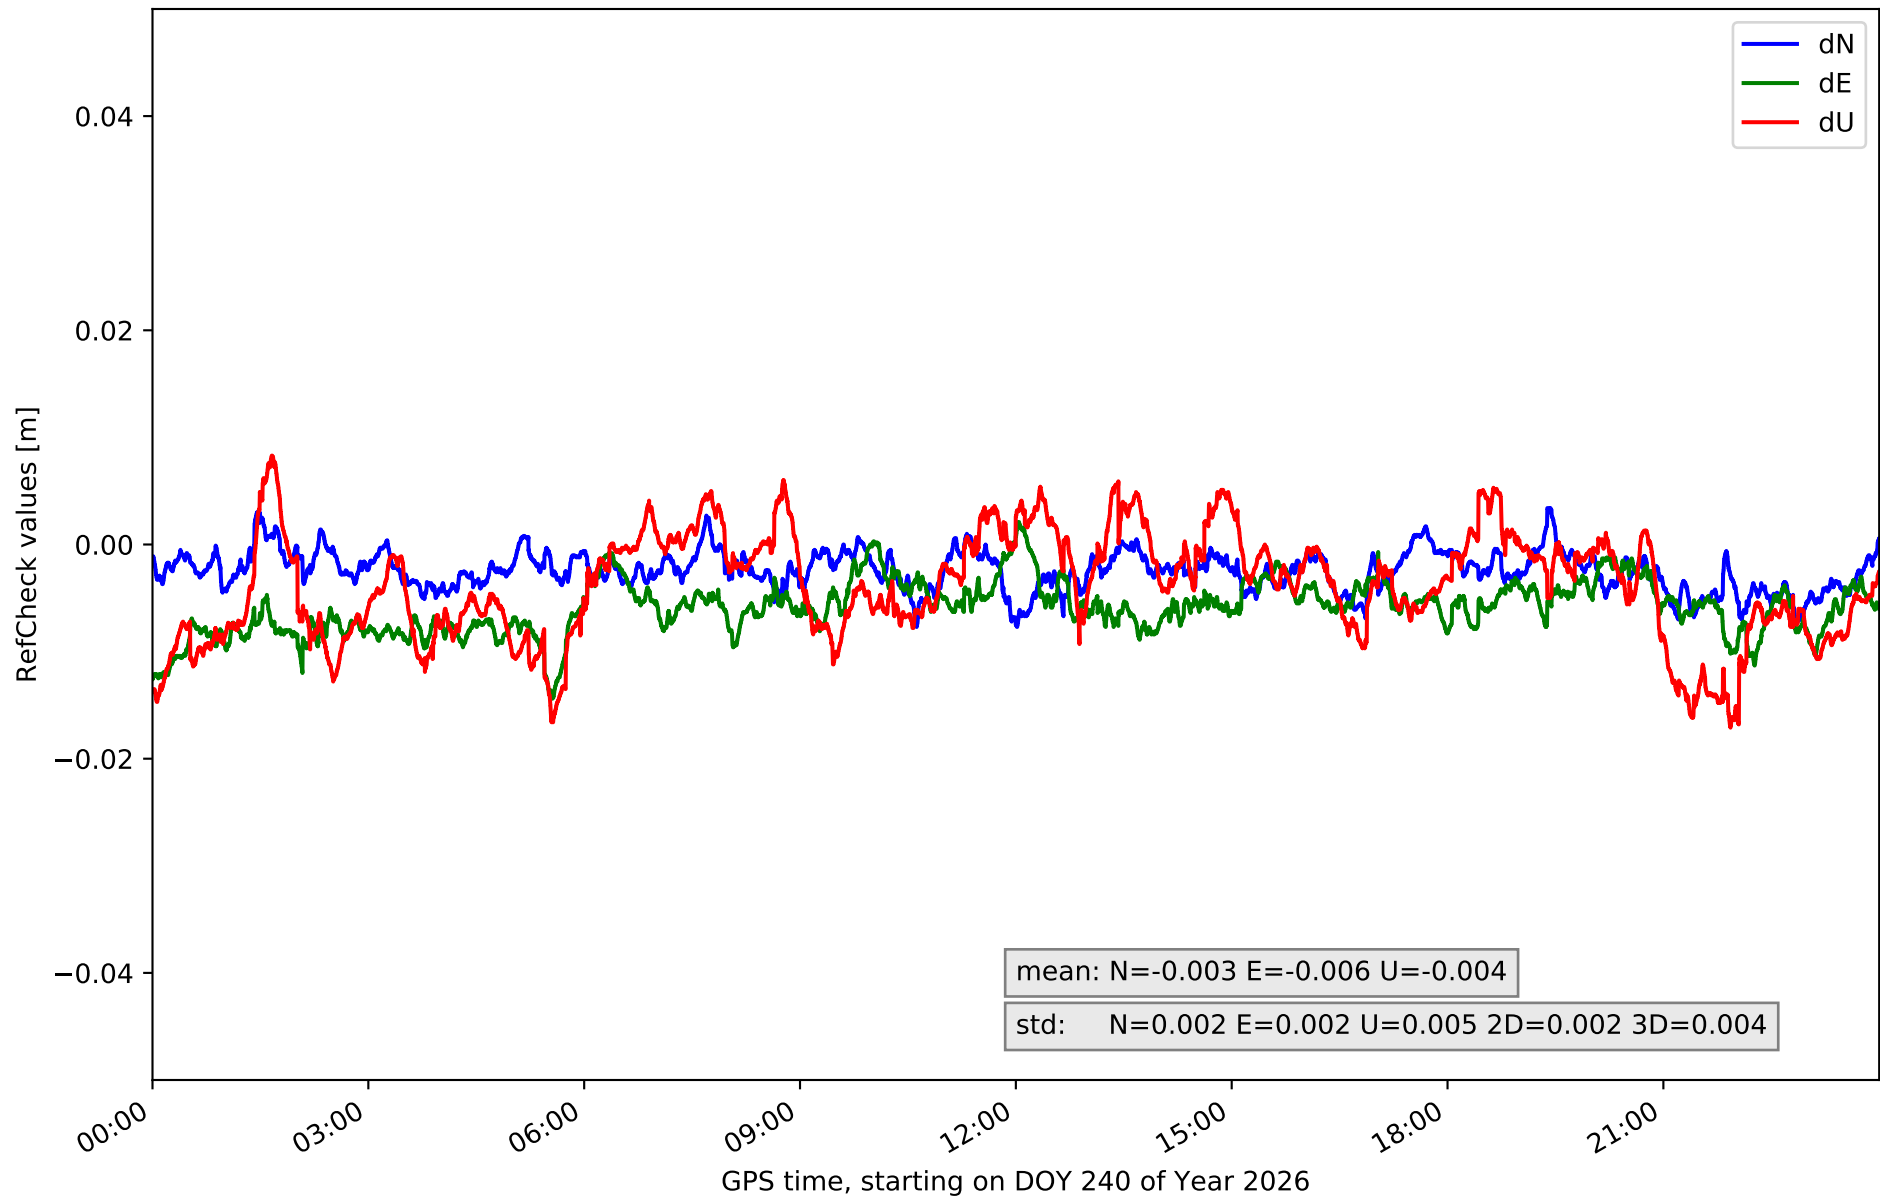

RefCheck for station TN09 in network NT32

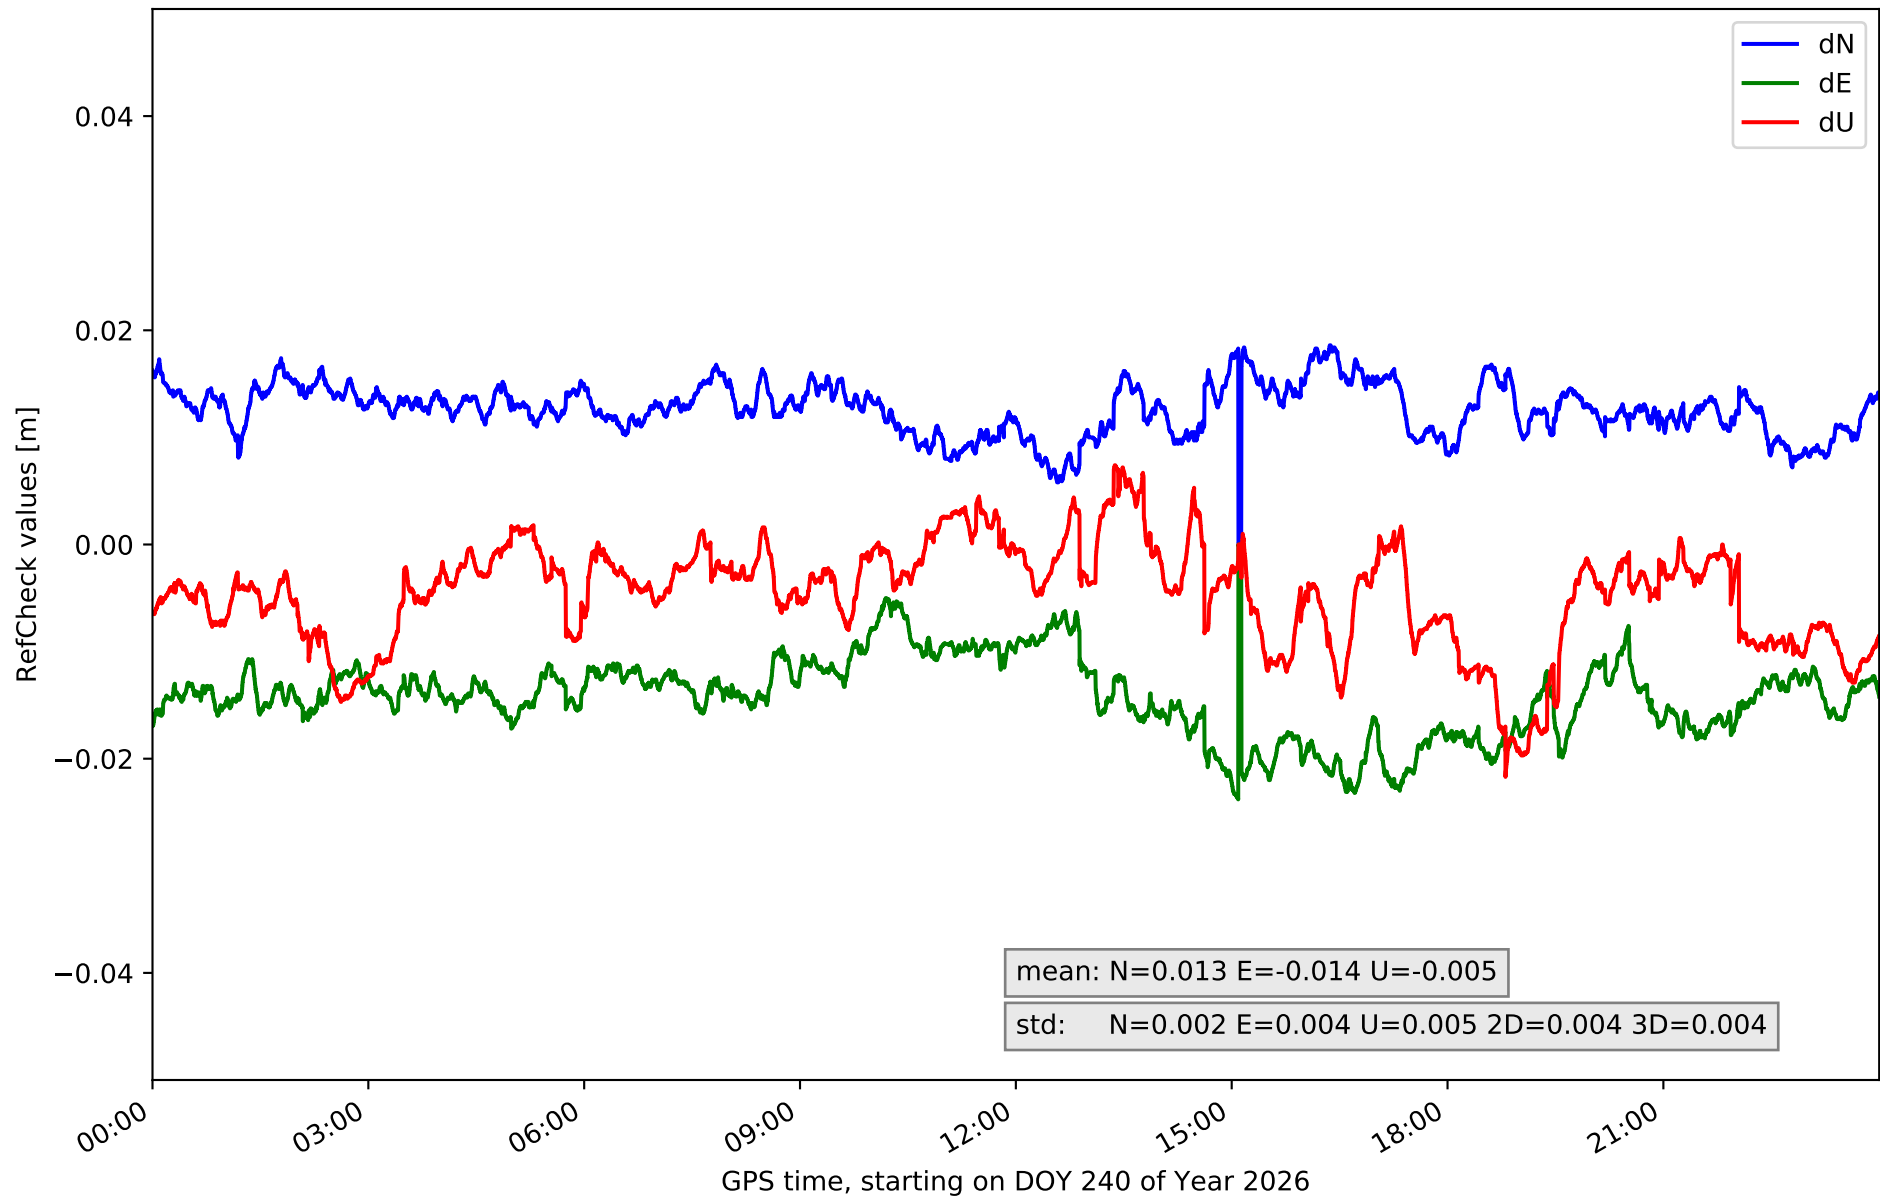

RefCheck for station TE11 in network NT32

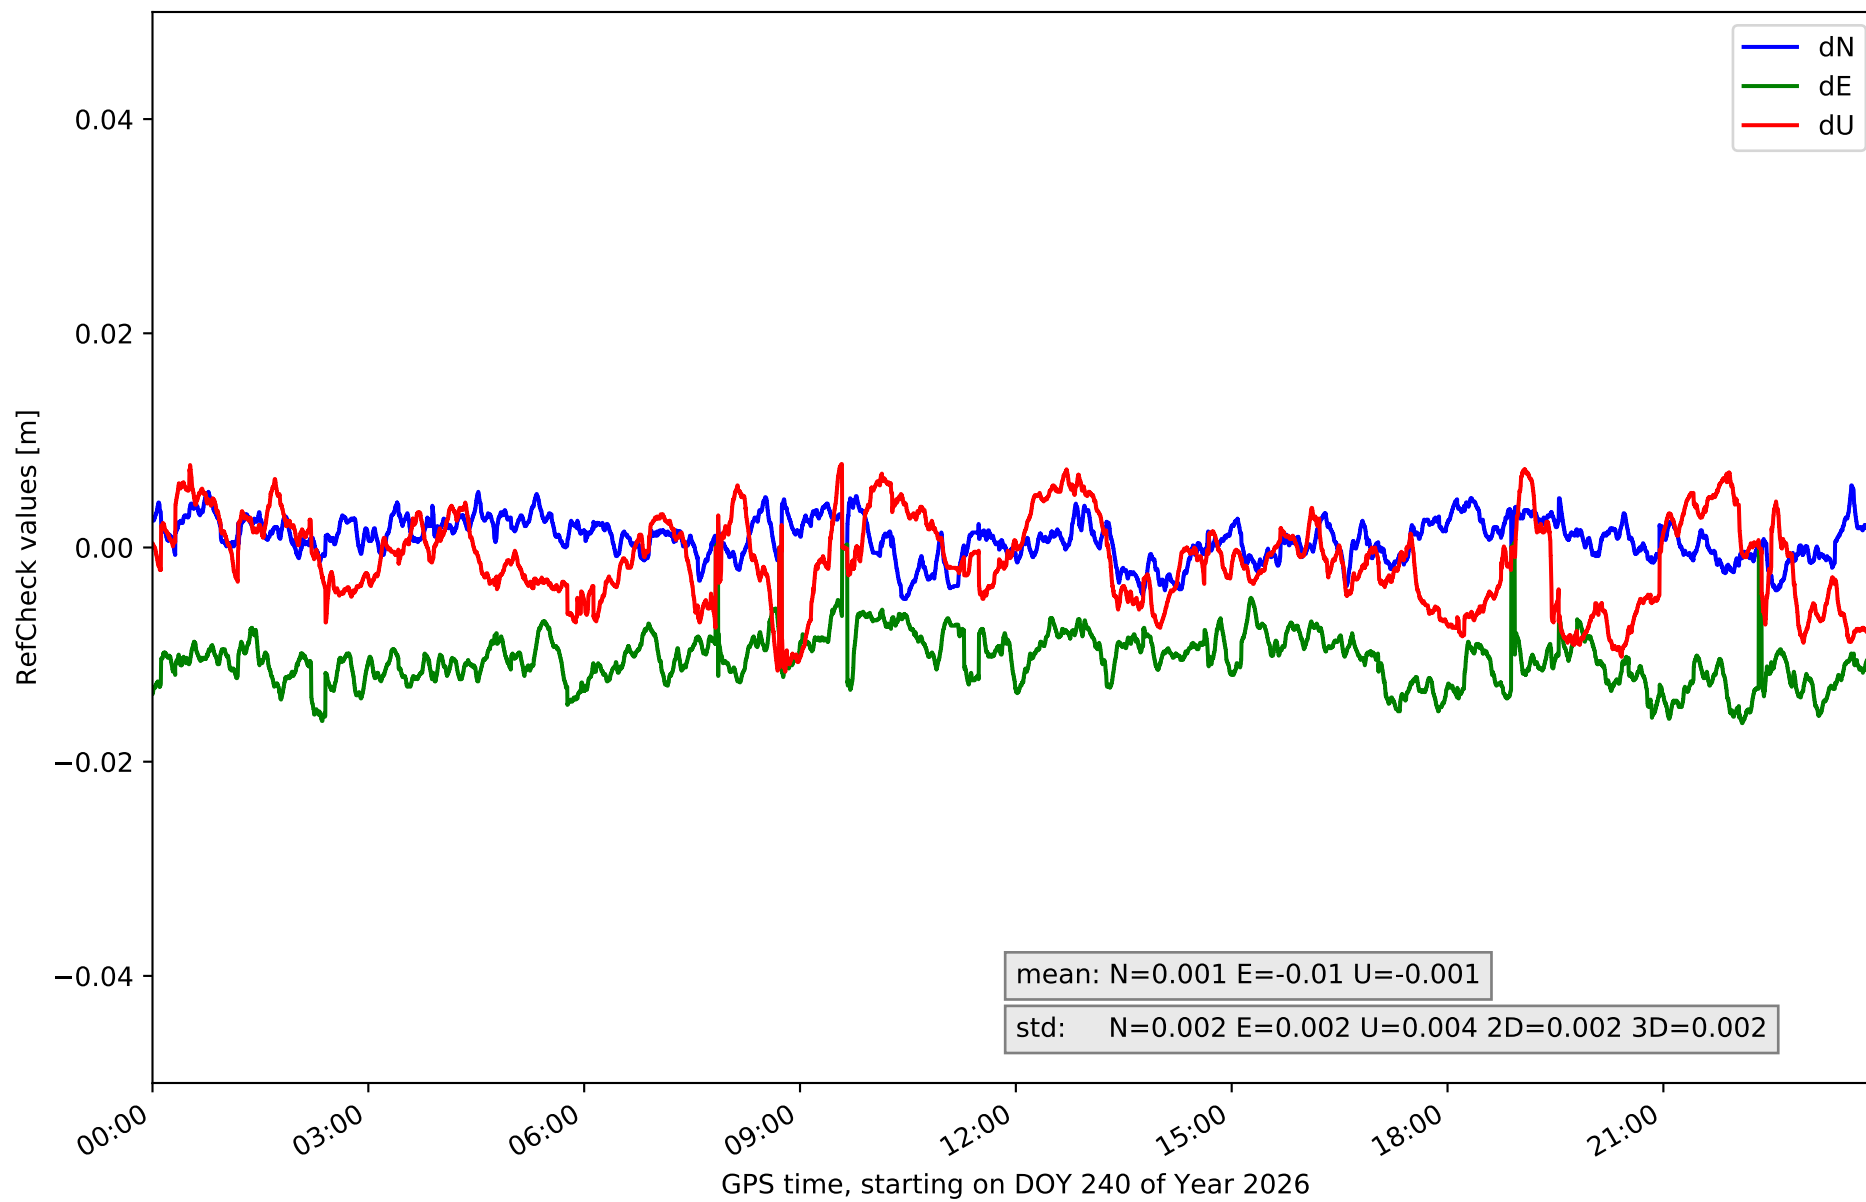

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.002	0.01	0.002	0.01	0.025	0.002	-0.005	0.023	0.006	0.002	0.003	75924	100.0	61427	80.9
EH02	-0.004	0.02	0.004	-0.007	0.029	0.005	-0.026	0.054	0.014	0.004	0.007	74211	97.7	48075	63.3
GOM1	-0.017	0.005	0.004	-0.021	0.006	0.004	-0.029	0.009	0.008	0.003	0.006	59496	78.4	27184	35.8
GOME	-0.003	0.009	0.002	-0.009	0.013	0.003	-0.009	0.02	0.006	0.002	0.004	1680	2.2	713	0.9
IZAN	-0.006	0.009	0.003	-0.02	0.001	0.003	-0.021	0.007	0.005	0.003	0.004	71370	94.0	16445	21.7
LP01	-0.025	-0.0	0.004	-0.015	0.021	0.007	-0.02	0.035	0.01	0.005	0.007	72843	95.9	44092	58.1
LP03	-0.01	0.017	0.003	-0.007	0.015	0.003	-0.021	0.033	0.01	0.003	0.005	8065	10.6	4871	6.4
LPAL	-0.019	-0.006	0.002	0.007	0.018	0.002	-0.023	0.007	0.005	0.003	0.003	75924	100.0	26729	35.2
LRES	-0.001	0.018	0.003	-0.0	0.03	0.004	-0.023	0.014	0.007	0.003	0.003	75479	99.4	58937	77.6
TN01	-0.013	0.01	0.003	-0.022	-0.003	0.004	-0.033	0.015	0.009	0.003	0.006	62829	82.8	19440	25.6
TN02	-0.012	0.009	0.004	-0.02	-0.0	0.003	-0.011	0.032	0.008	0.003	0.005	48166	63.4	12023	15.8
TN03	-0.003	0.012	0.003	-0.015	0.005	0.003	-0.02	0.015	0.006	0.003	0.003	8596	11.3	325	0.4
TN06	-0.008	0.003	0.002	-0.014	0.002	0.002	-0.017	0.008	0.005	0.002	0.004	5641	7.4	302	0.4
TN09	0.0	0.019	0.002	-0.024	-0.0	0.004	-0.022	0.007	0.005	0.004	0.004	75035	98.8	38186	50.3
TE11	-0.005	0.006	0.002	-0.016	0.001	0.002	-0.012	0.008	0.004	0.002	0.002	48718	64.2	0	0.0
Mean	-0.009	0.009	0.003	-0.012	0.011	0.003	-0.019	0.019	0.007	0.003	0.004	50931.8	67.1	23916.6	31.5
Min/Max	-0.025	0.02	0.004	-0.024	0.03	0.007	-0.033	0.054	0.014	0.005	0.007	75924	100.0	61427	80.9

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	94.5	94.4	93.0	95.7	94.3
considering satellites with dual-frequency fixed	92.7	92.3	91.0	94.1	92.8
considering all signals separately	92.9	92.5	91.0	94.3	92.6