

summary for network N32T

timeperiod chosen: from 2026-09-14-00:00:00 until 2026-09-14-23:59:58

average update rate (durations larger than 15 seconds considered as observation gap): 1.5 seconds


average fixing percentage with threshold set to 0.3: 94.4 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

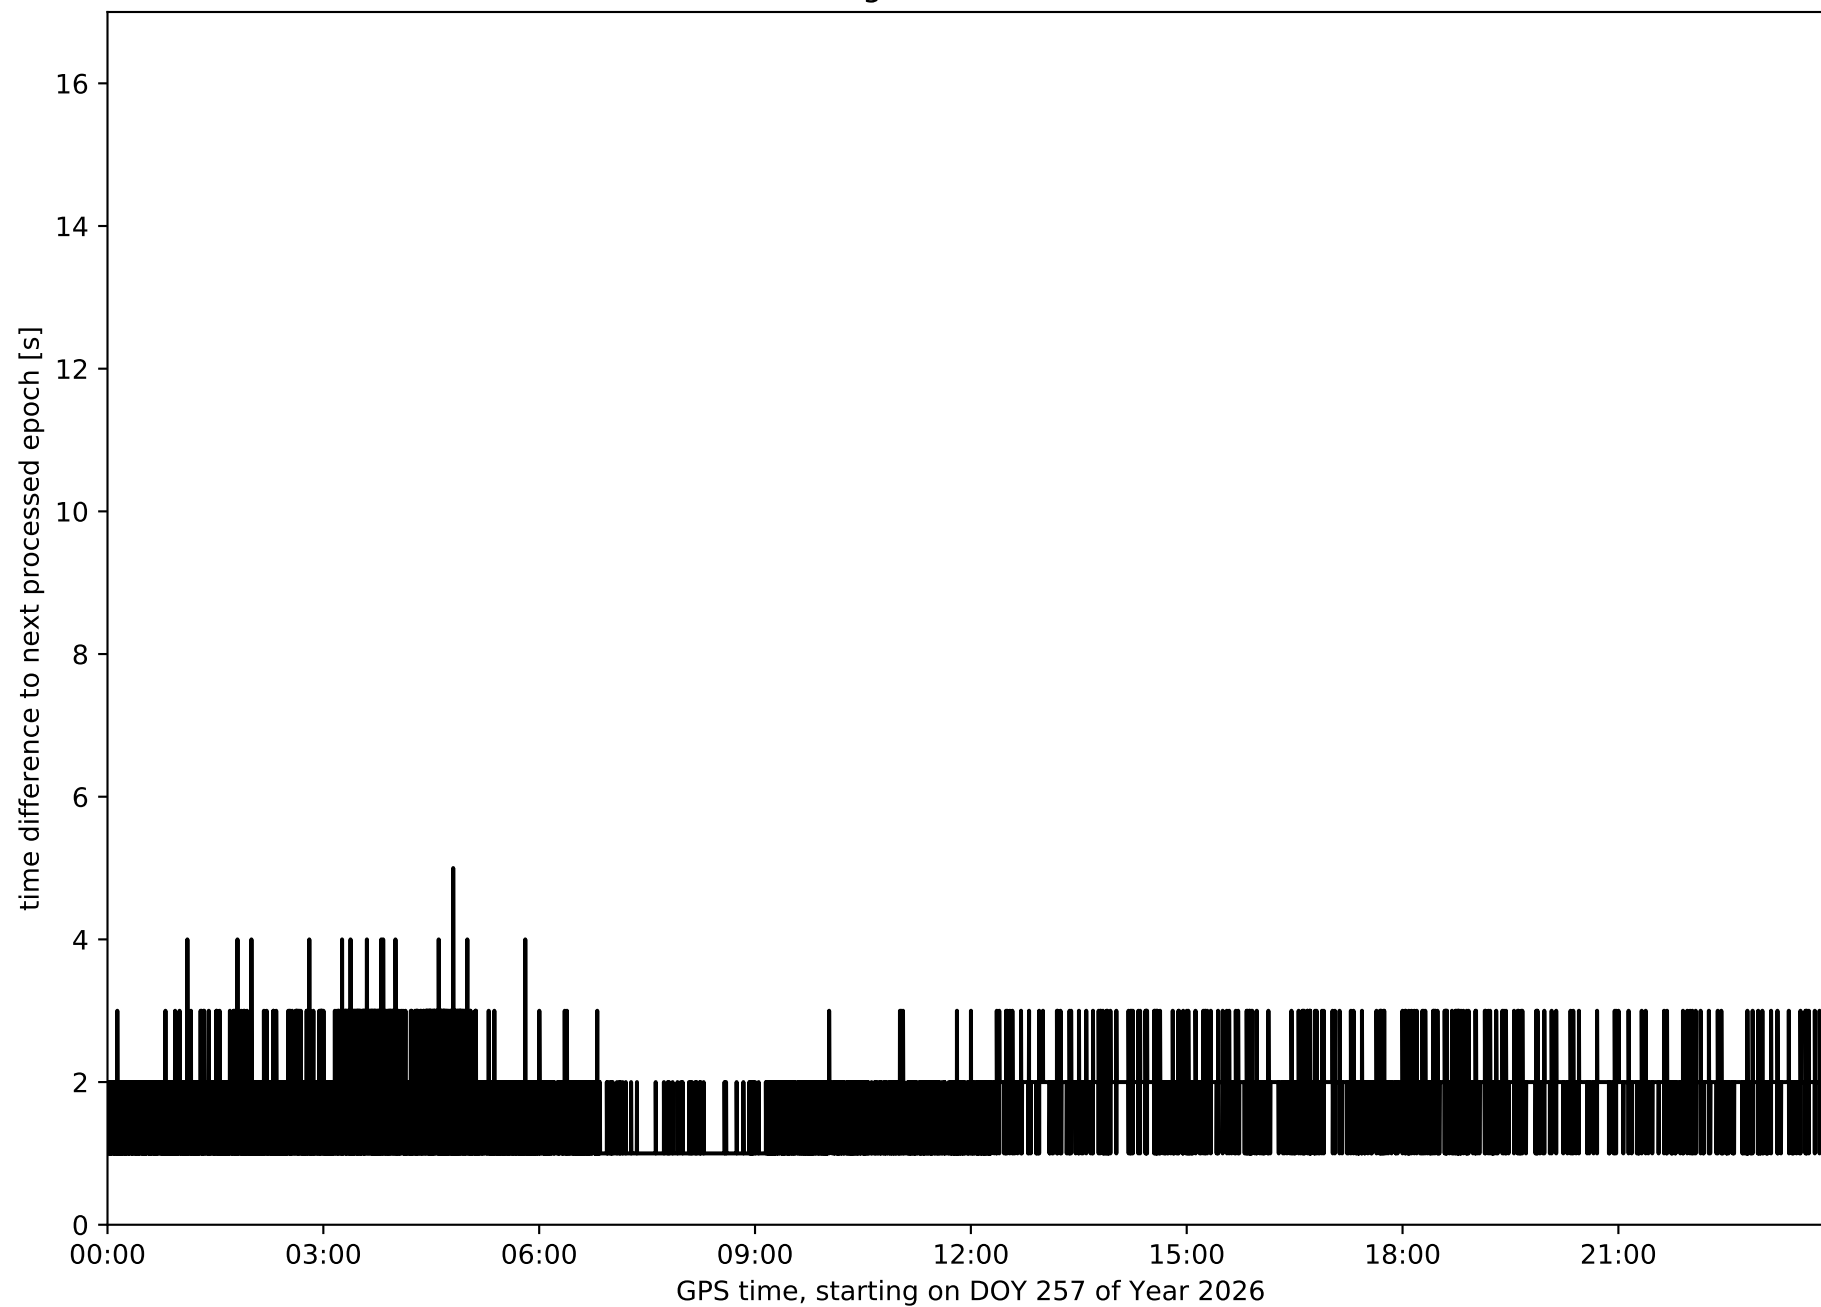


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

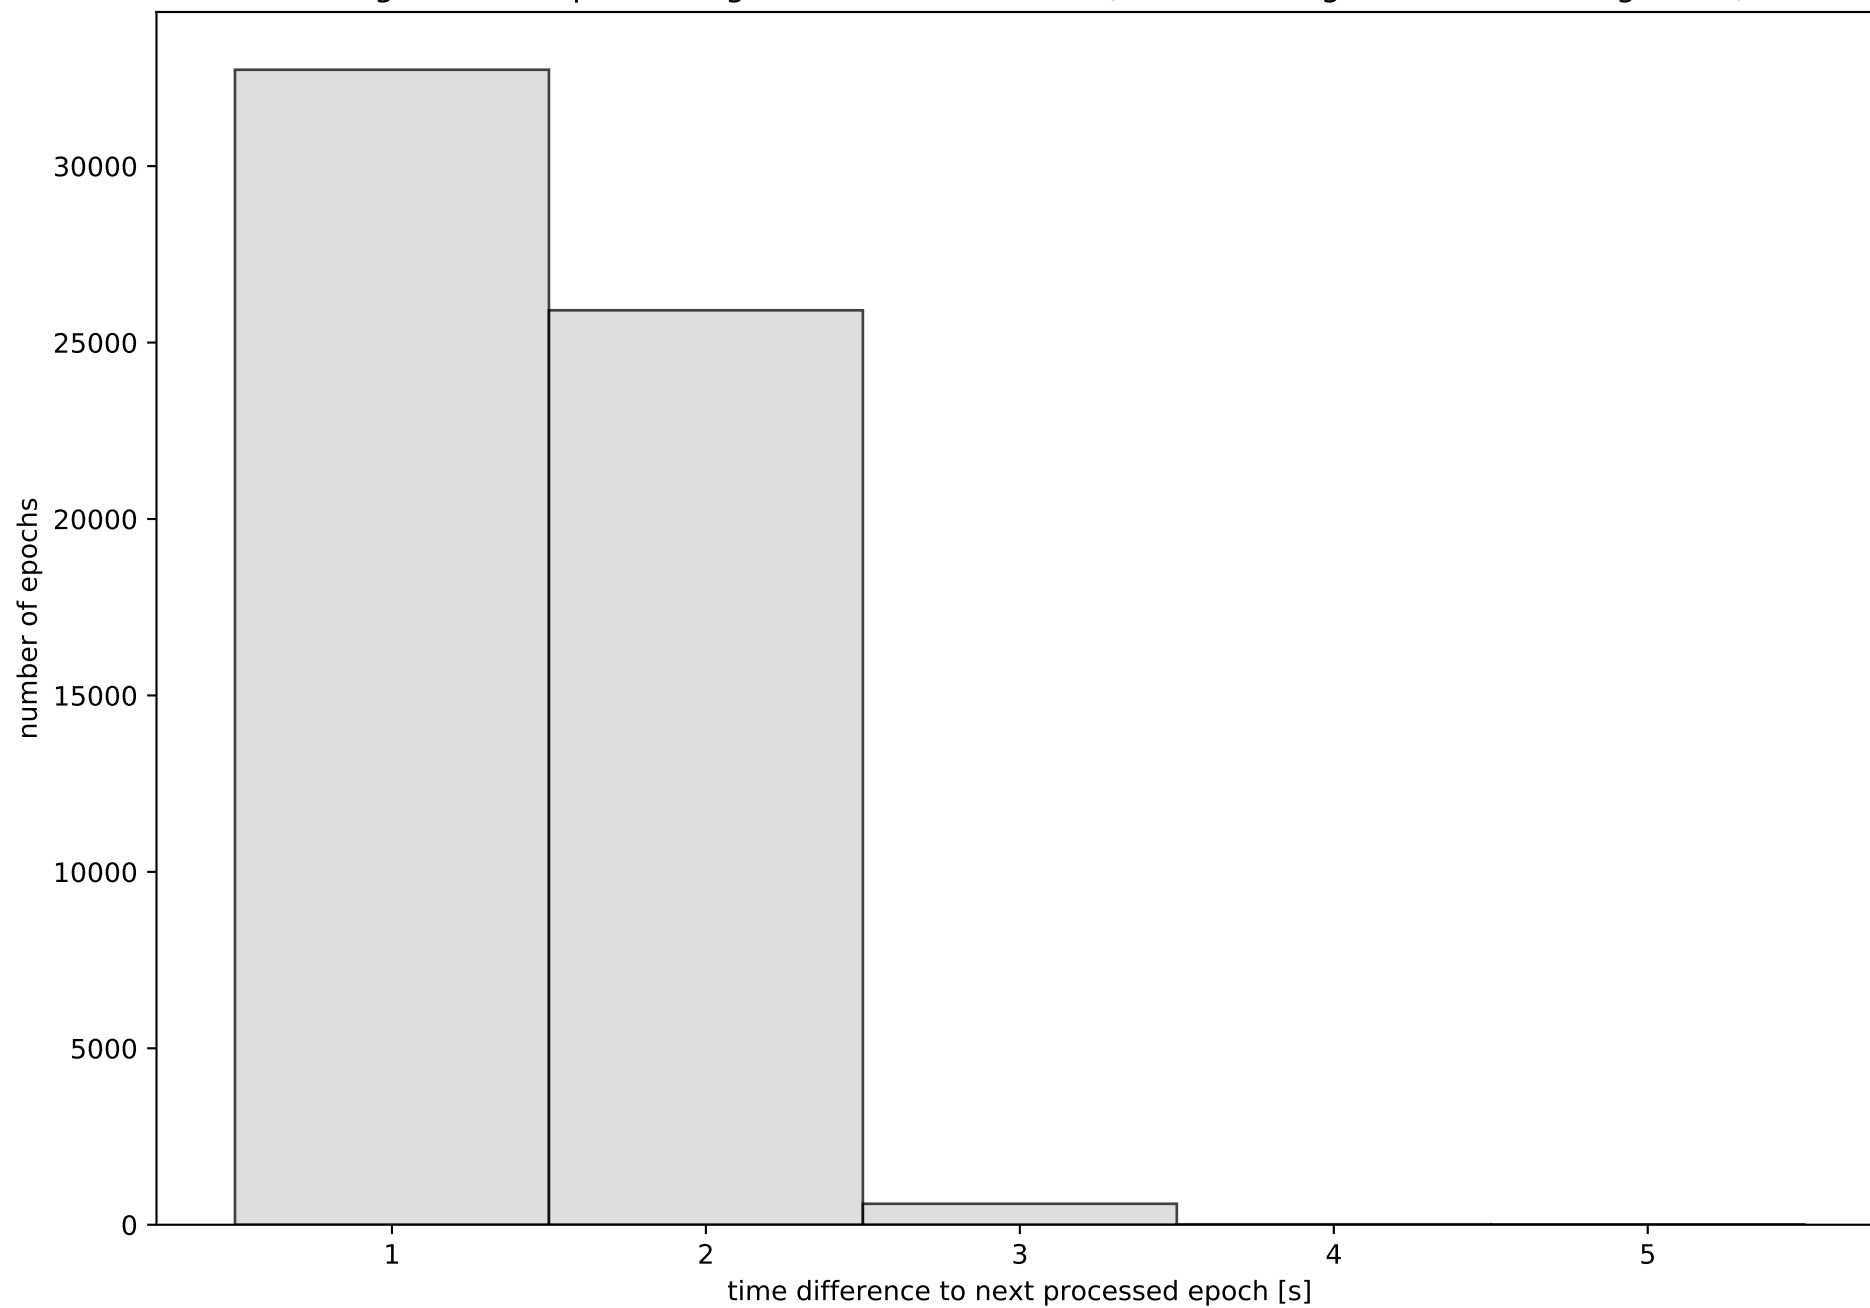


Network N32T with threshold set to 0.3

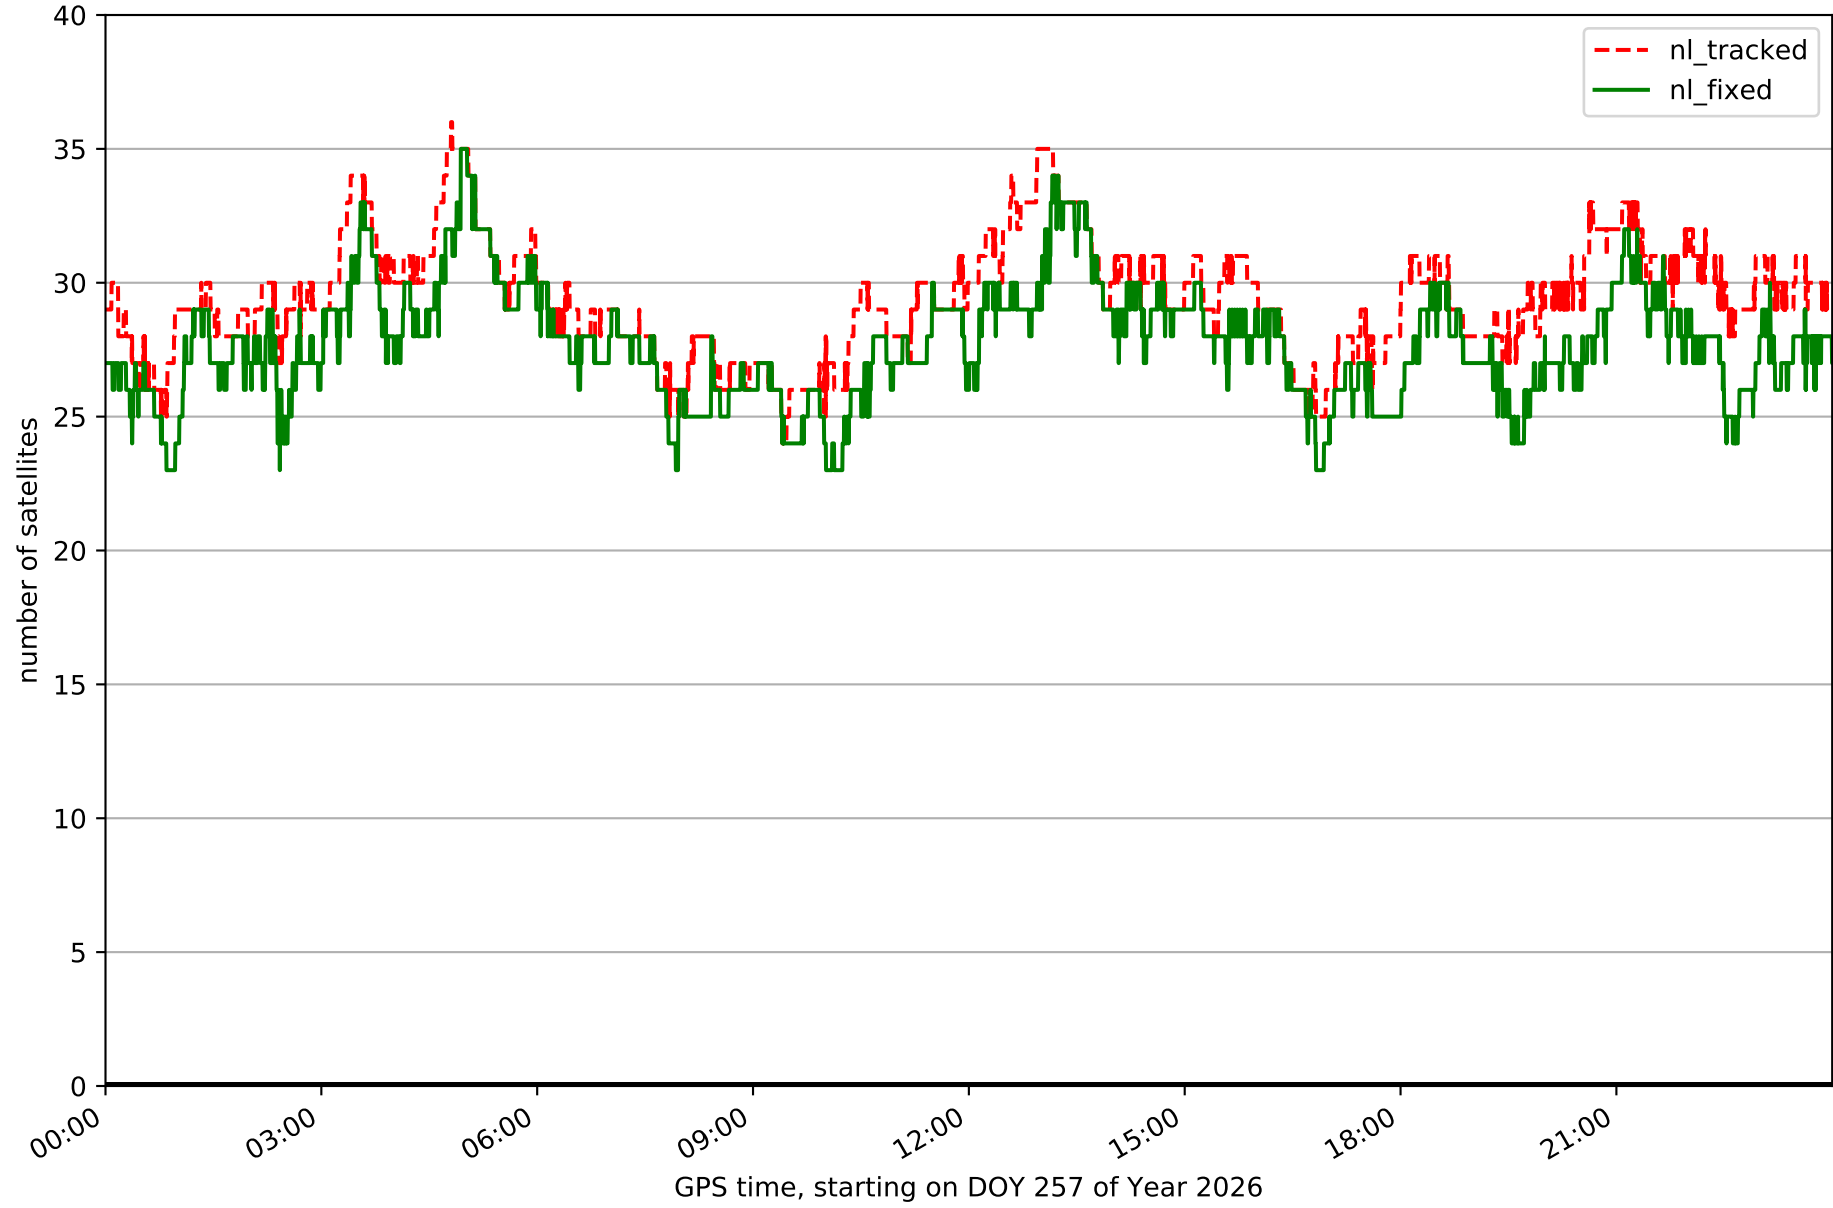


Fixing percentage of satellites in network N32T with threshold set to 0.3

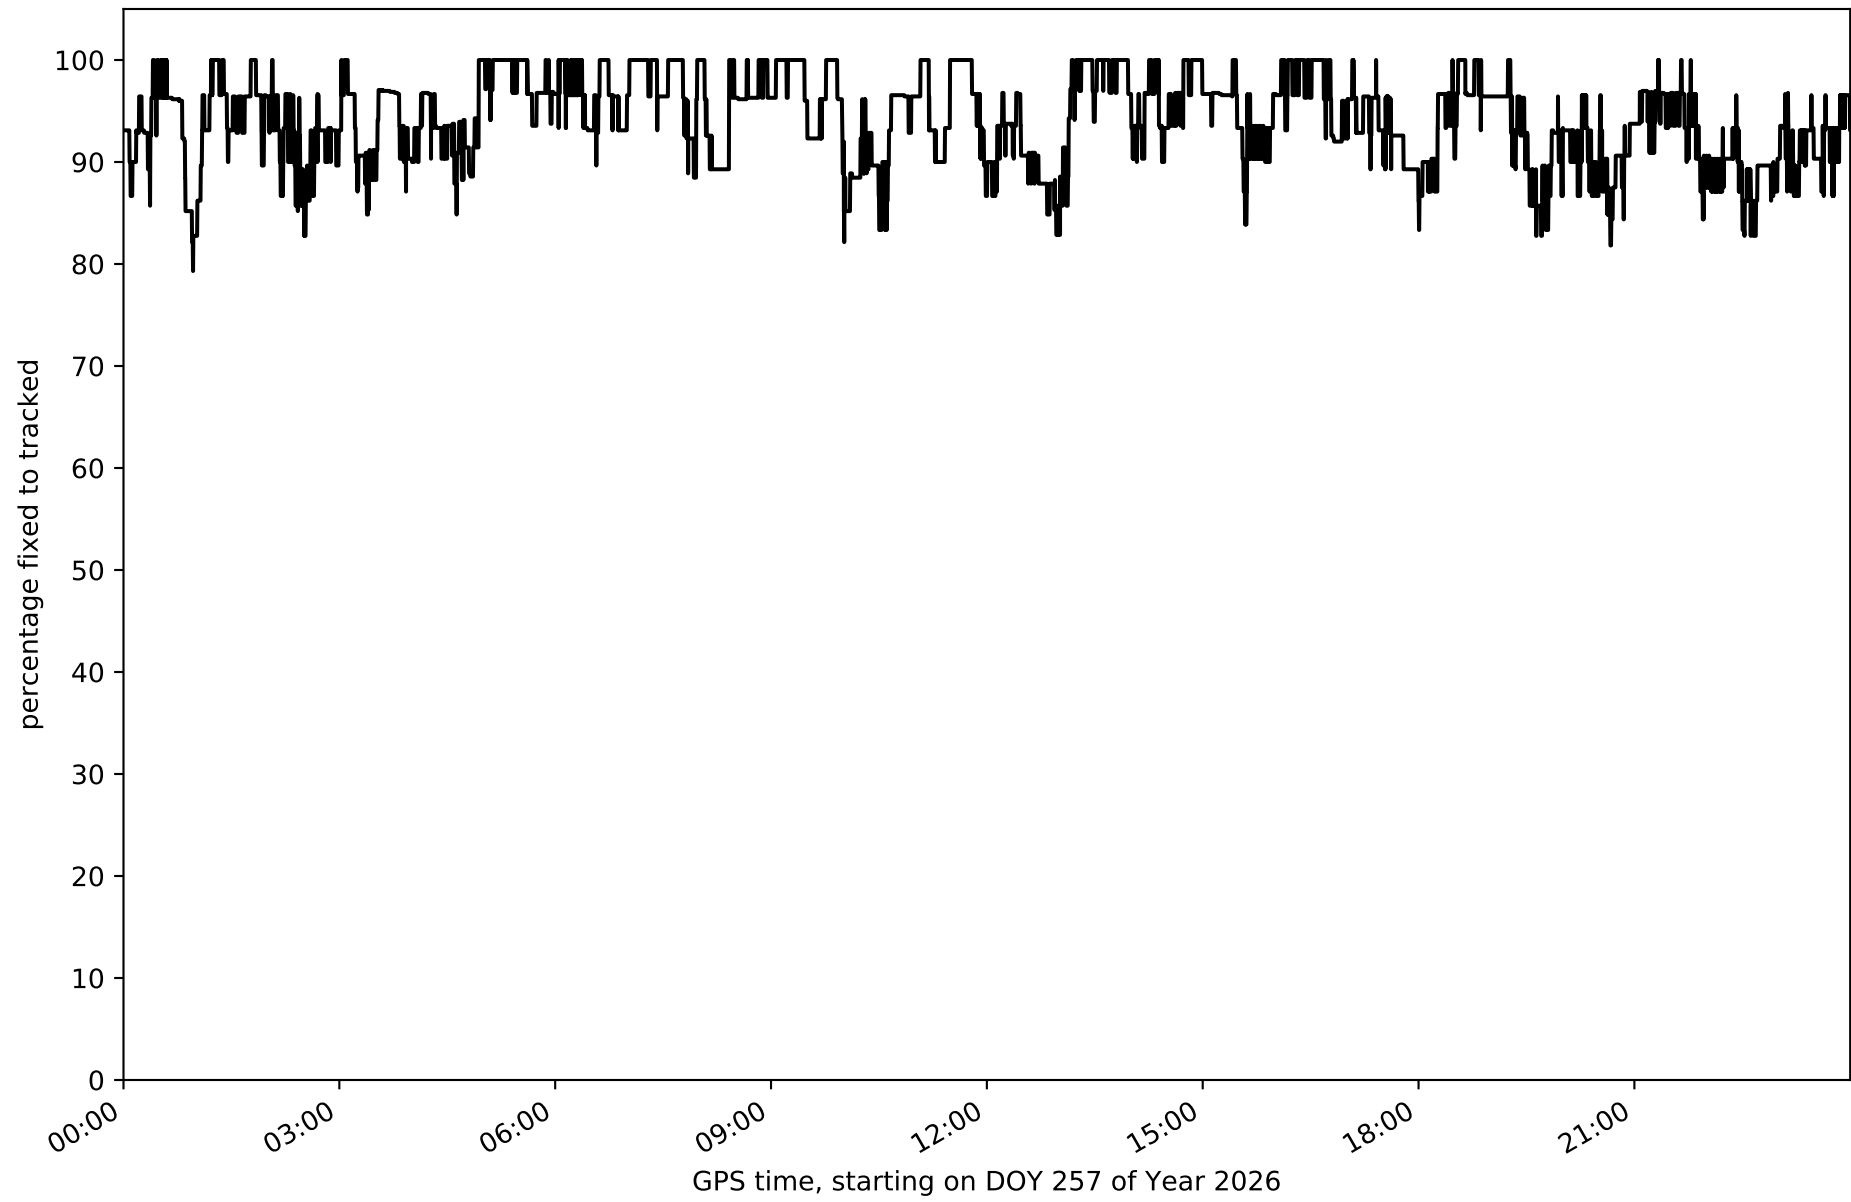


Network N32T - only GPS with threshold set to 0.3

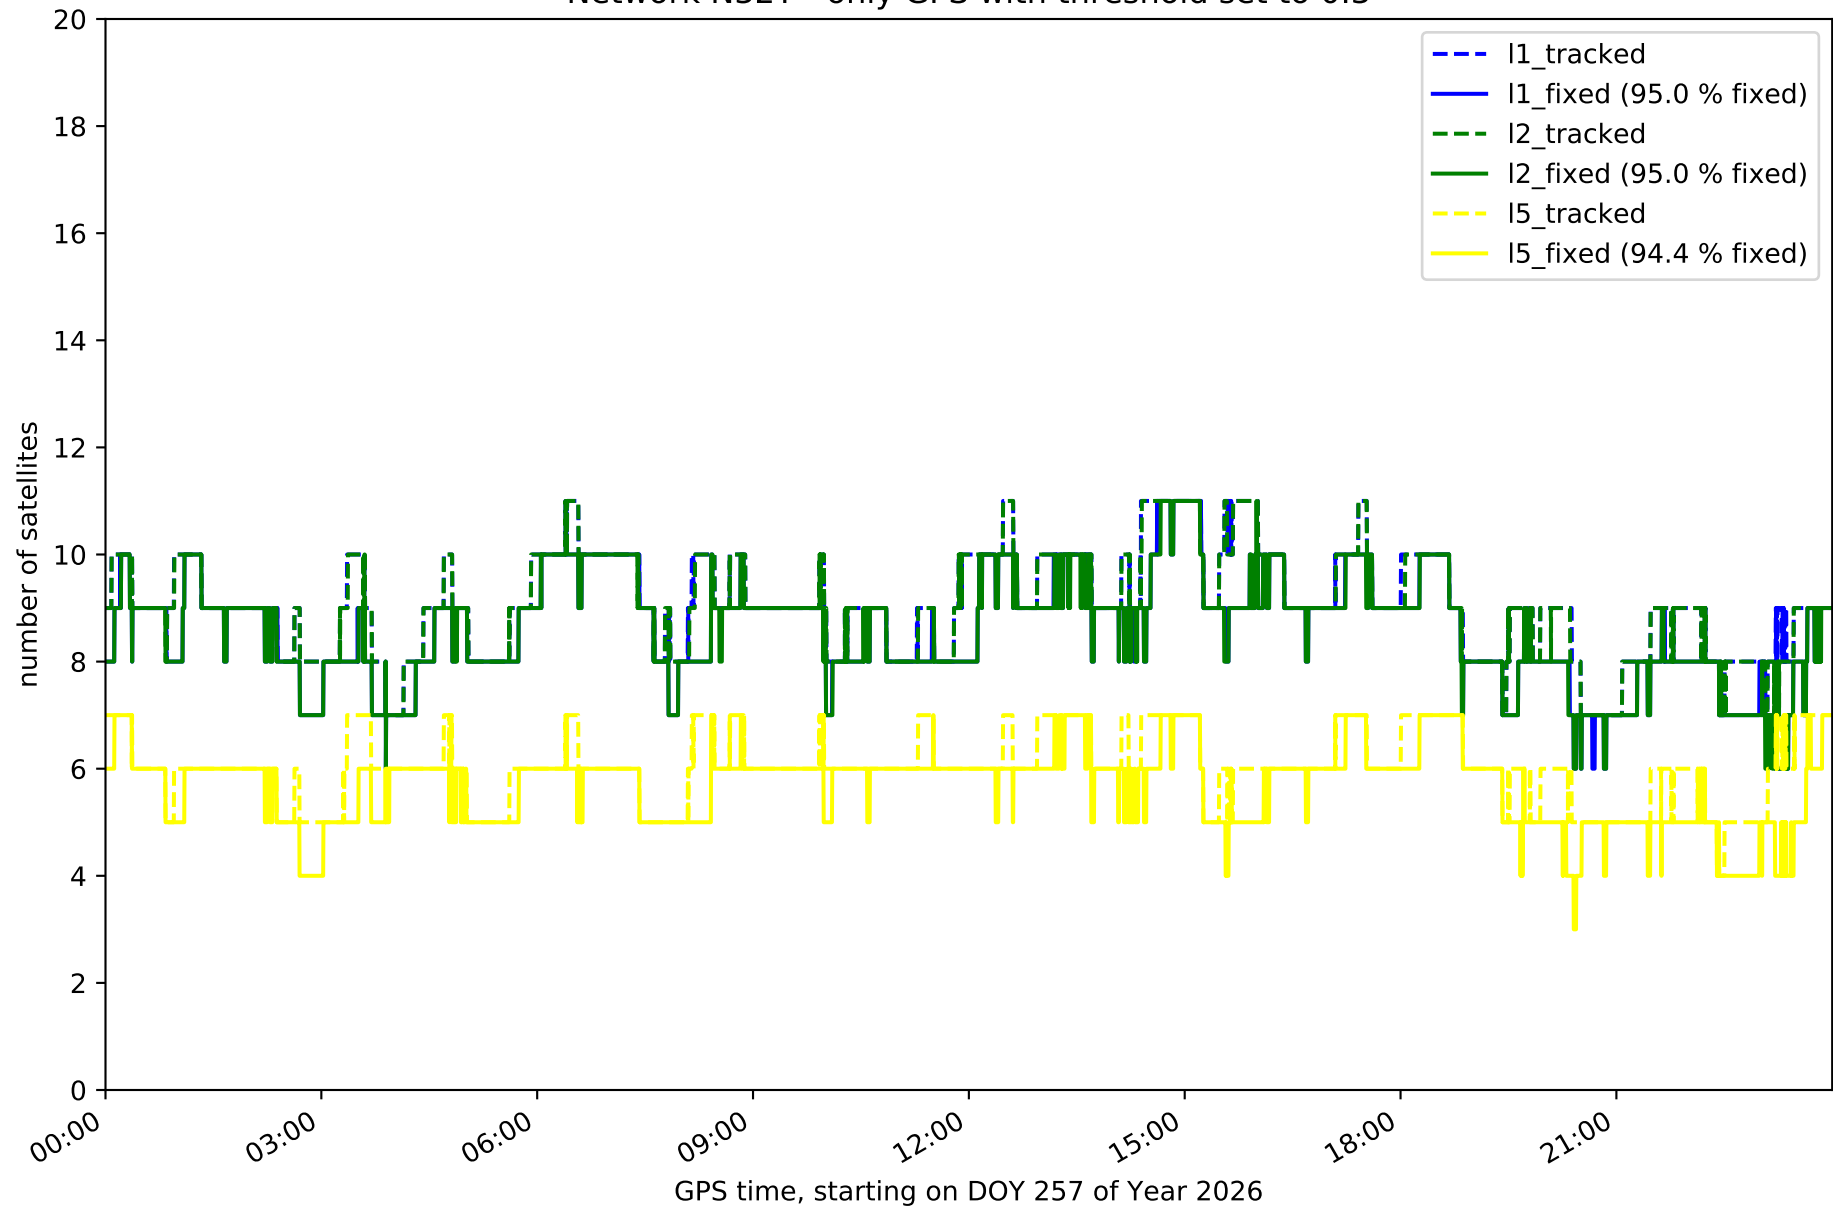


Network N32T - only GLONASS with threshold set to 0.3

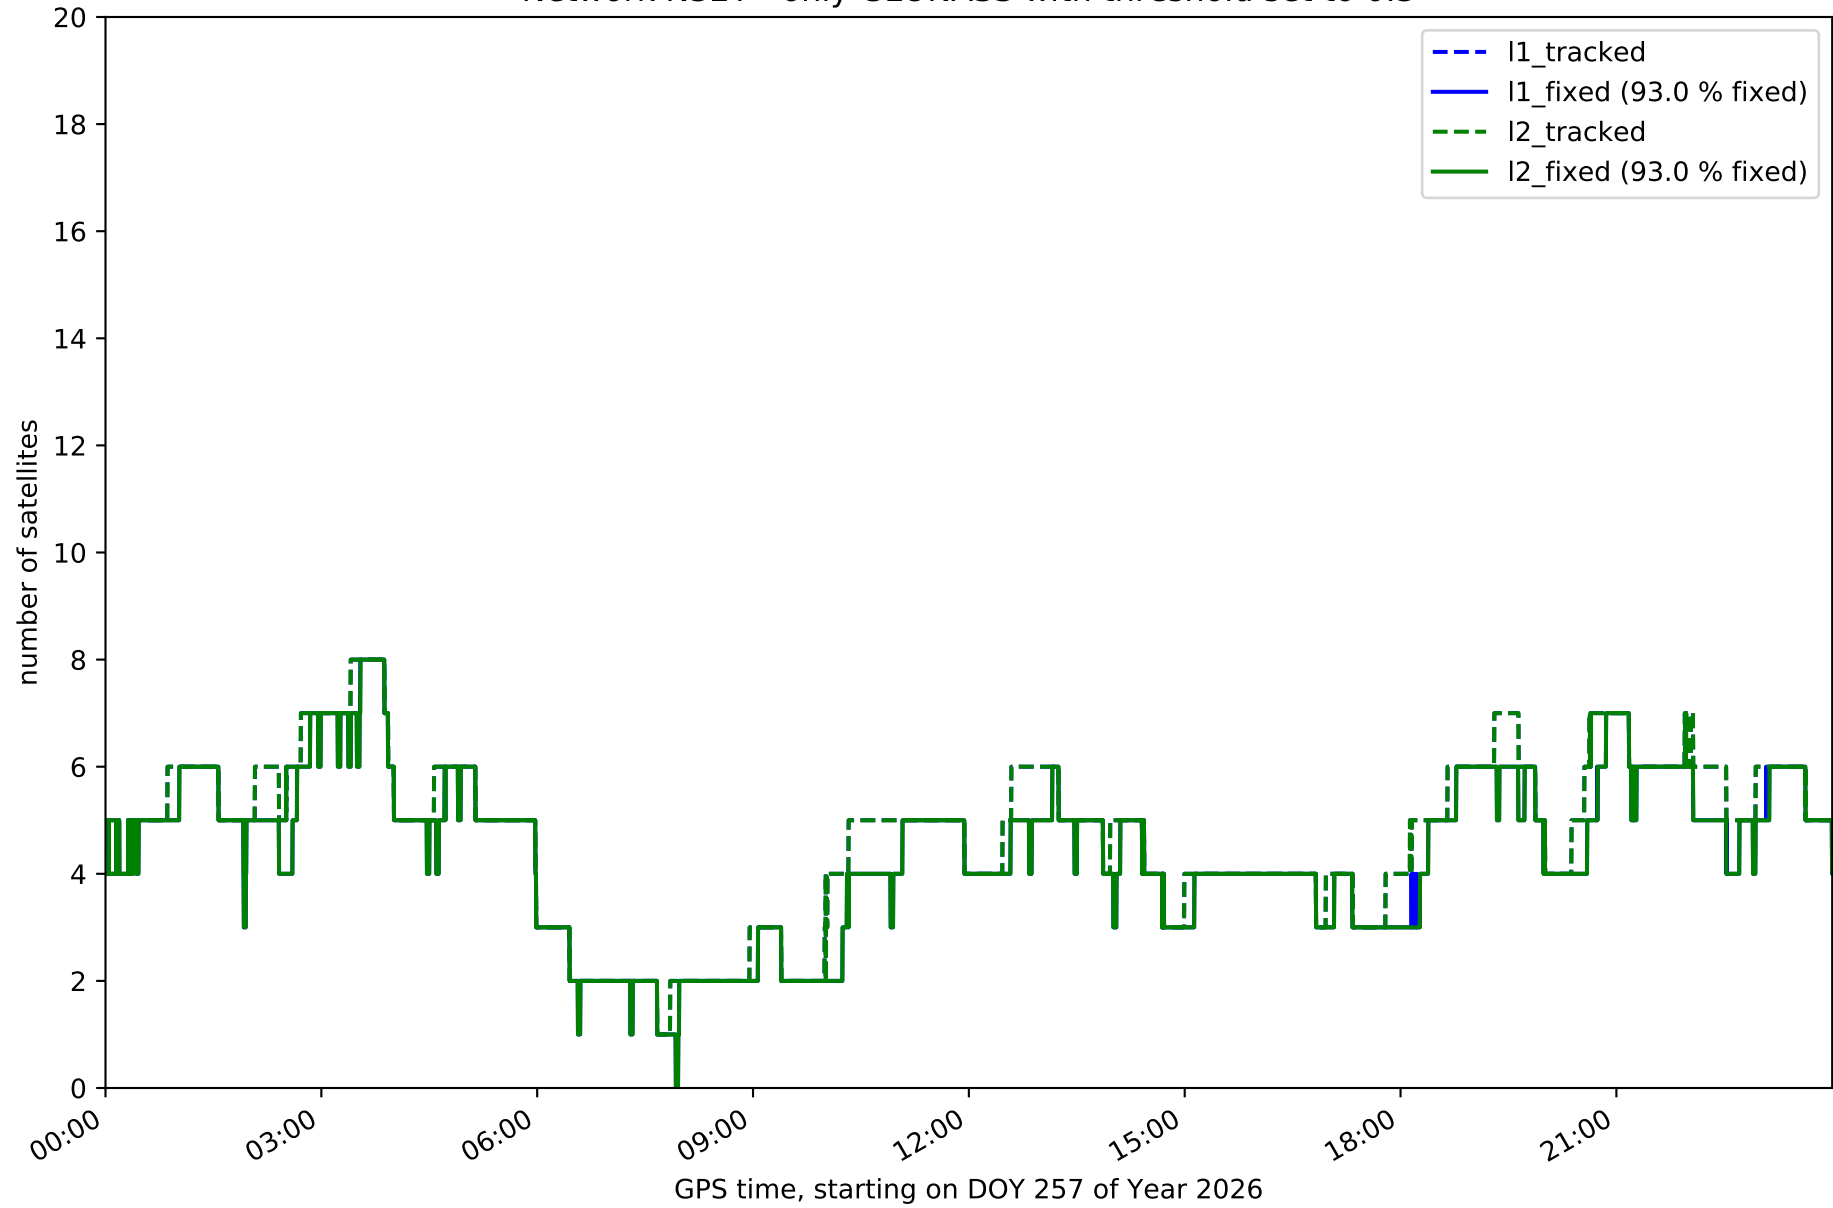


Network N32T - only BDS with threshold set to 0.3

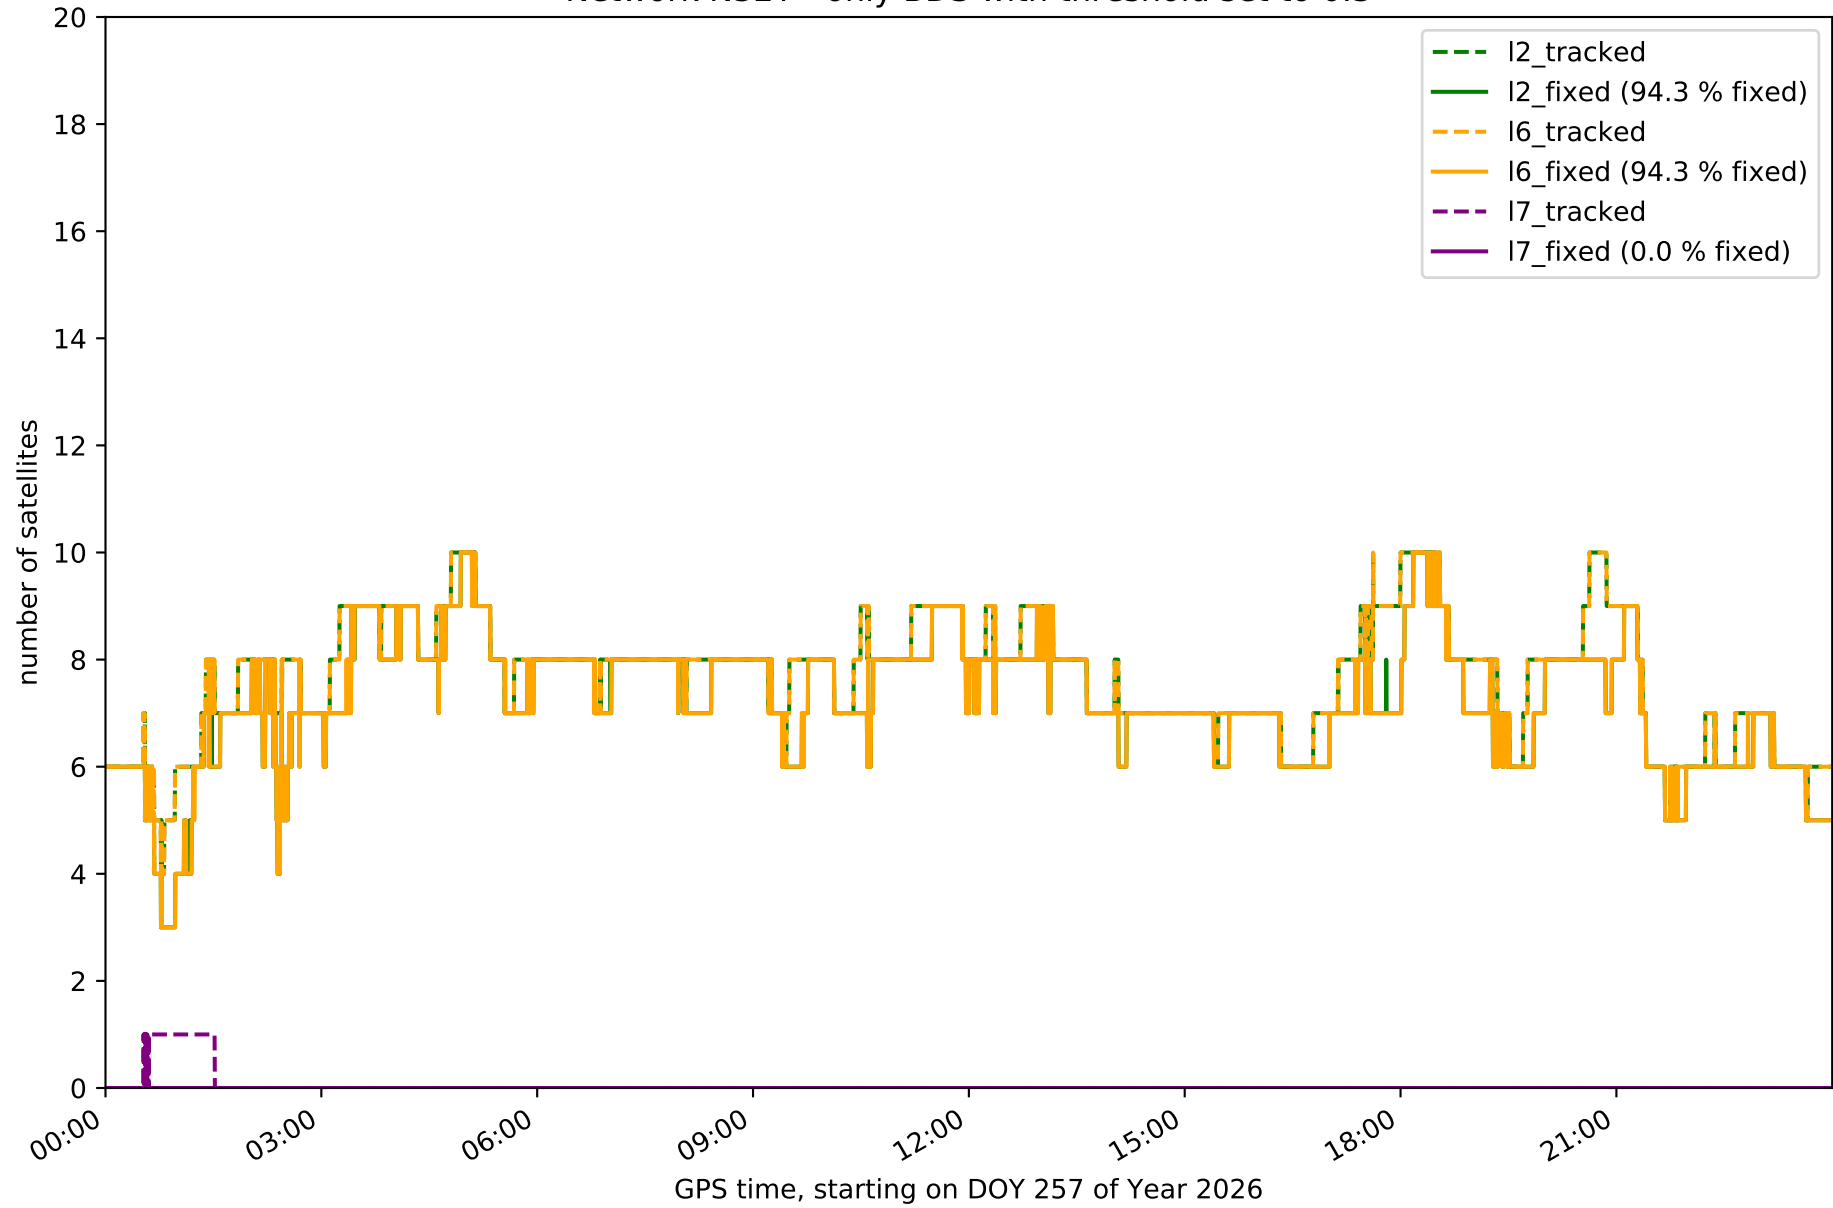


Network N32T - only Galileo with threshold set to 0.3

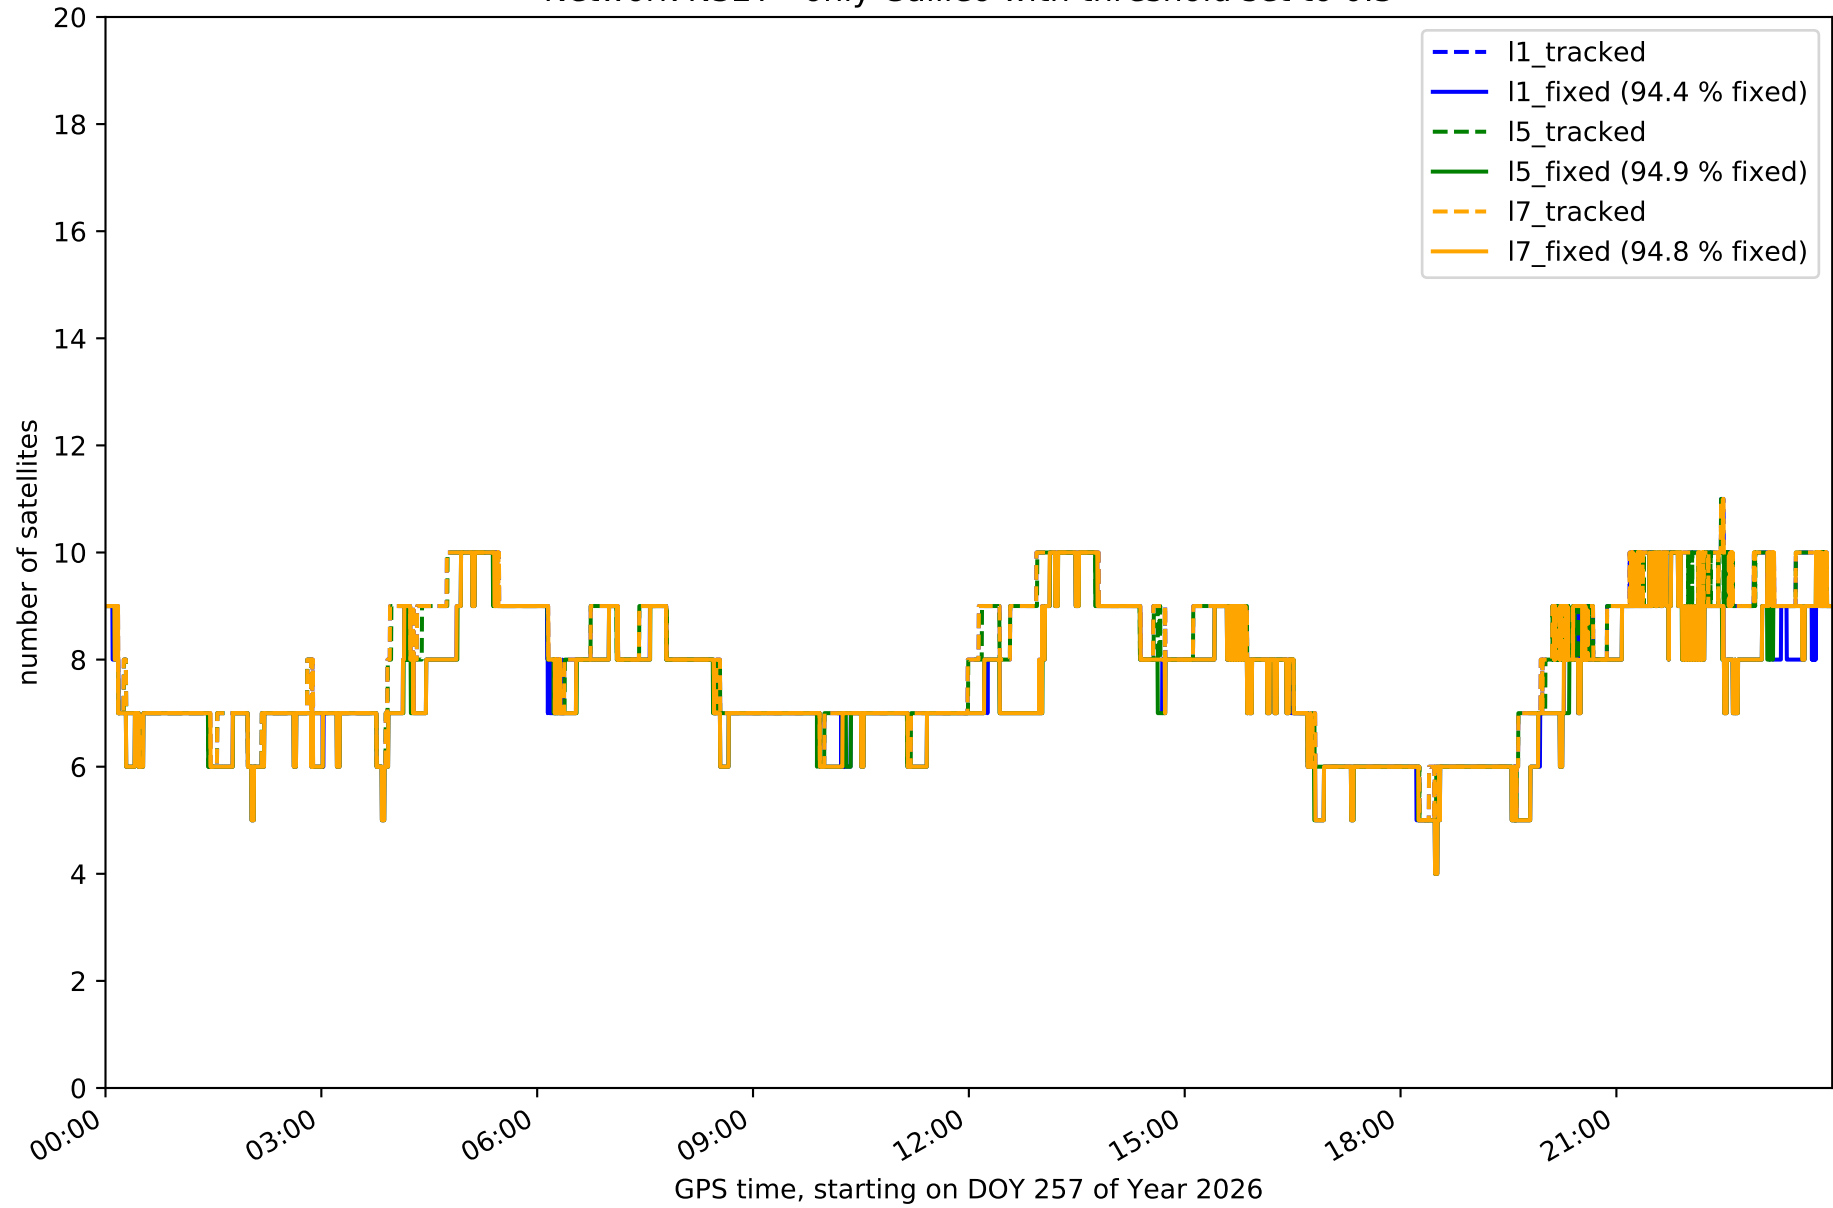


Station EH01 in network N32T

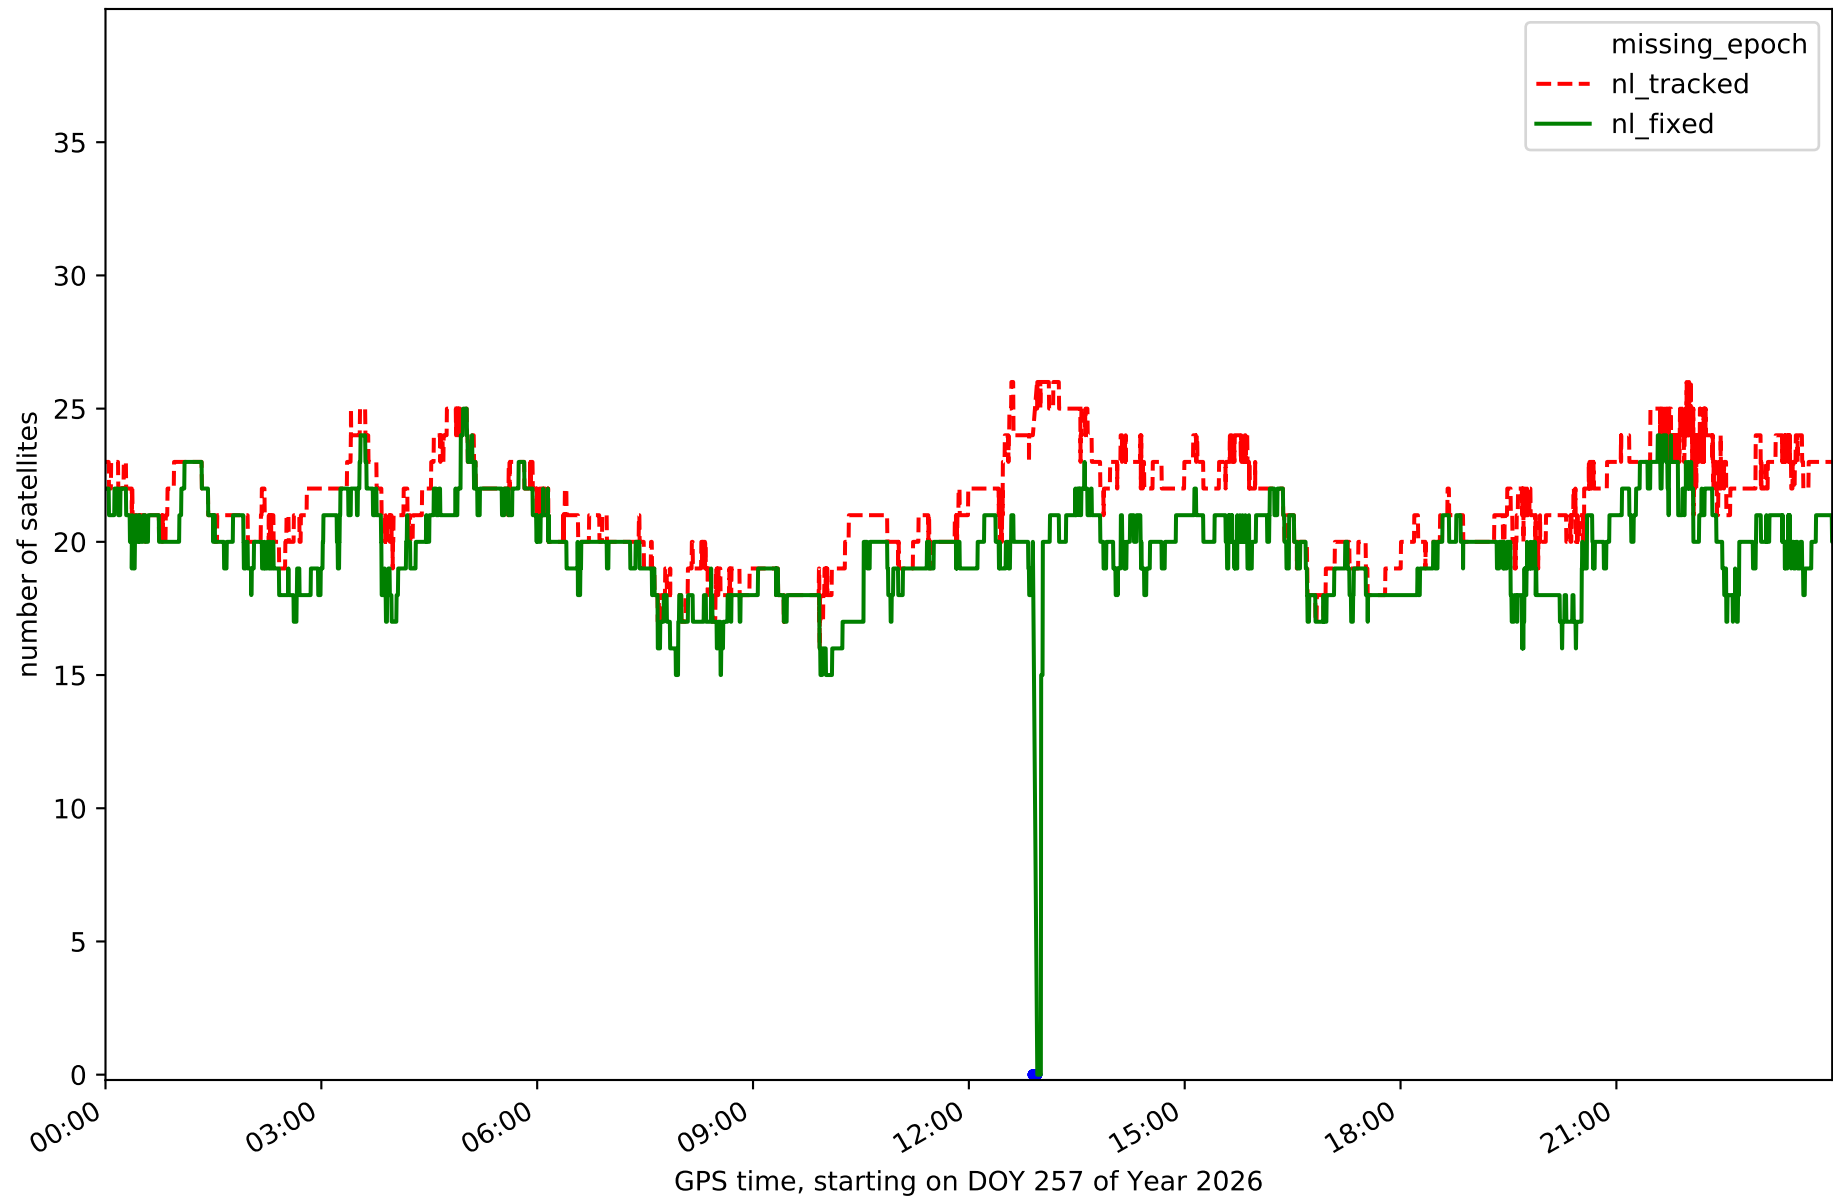


Station EH02 in network N32T

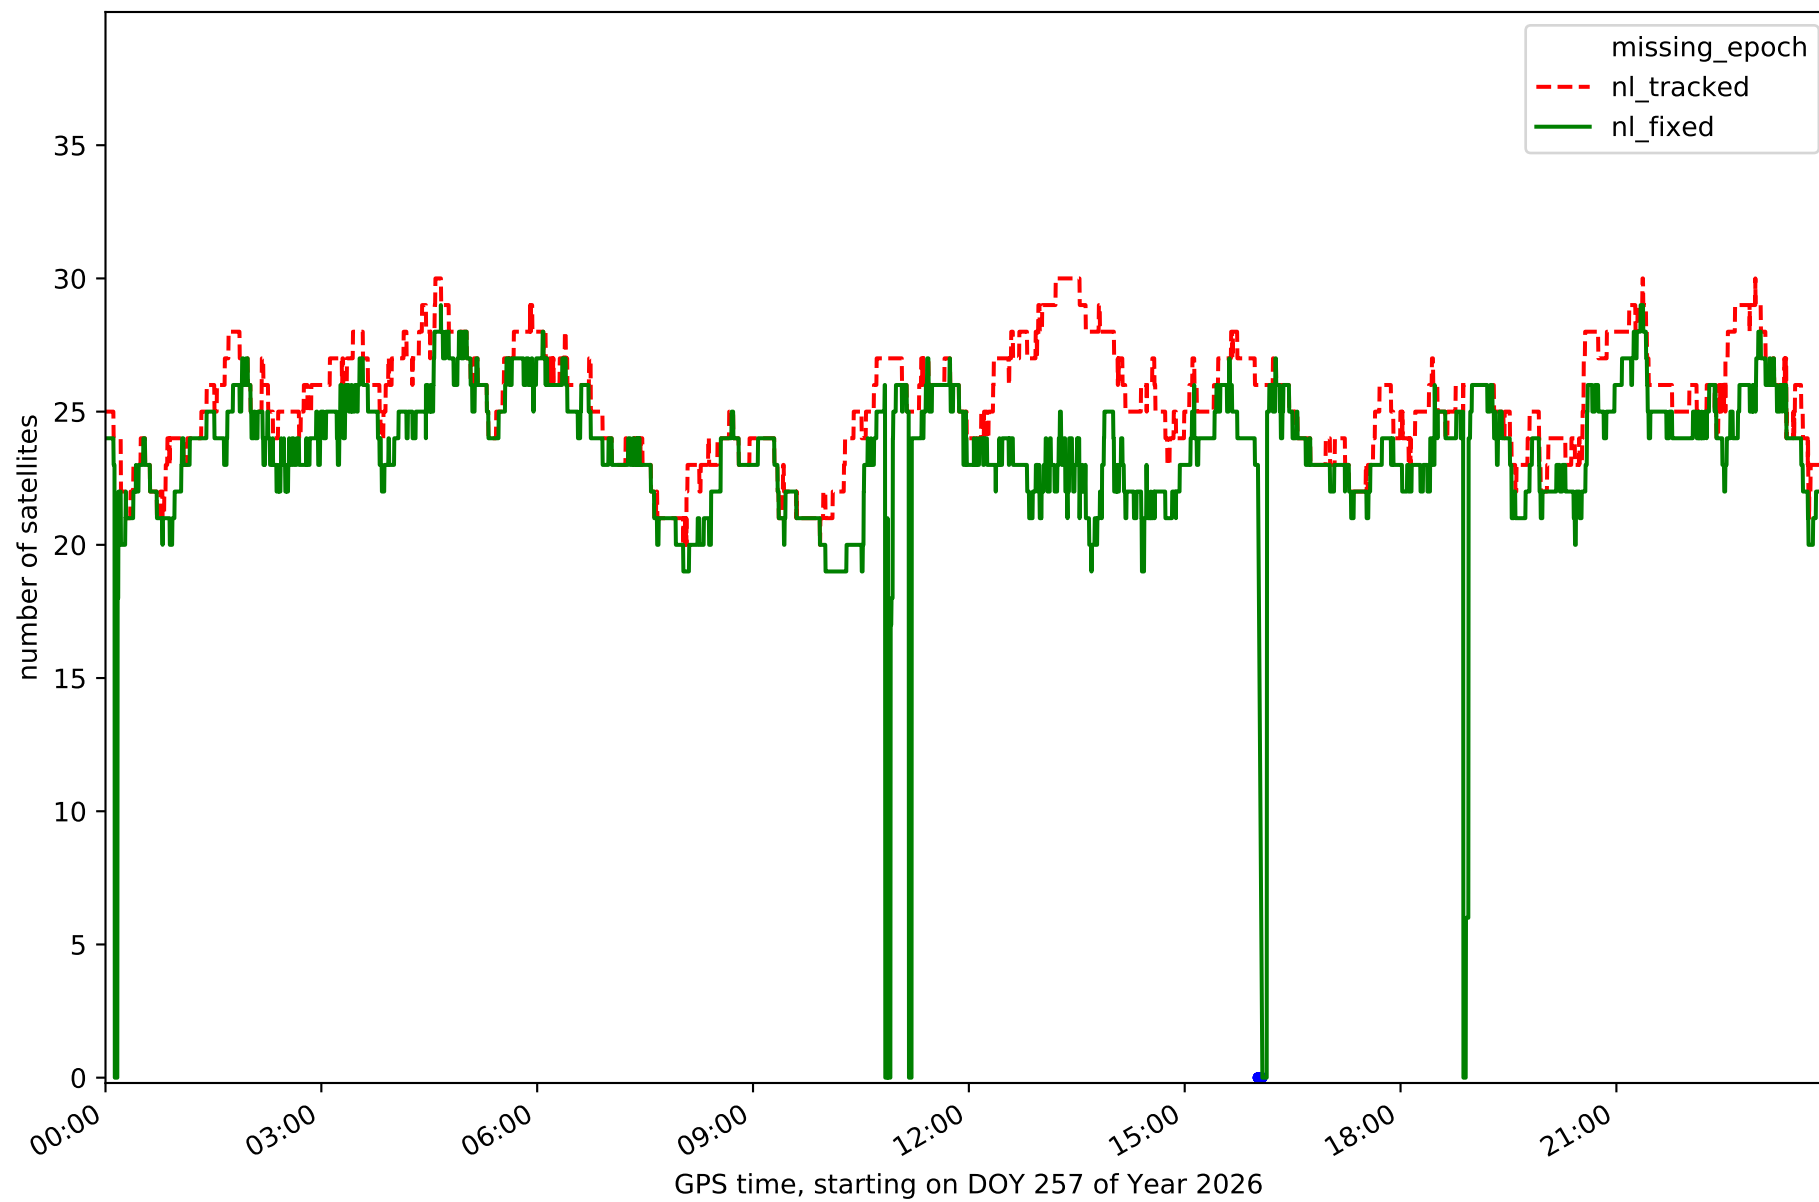


Station GOM1 in network N32T

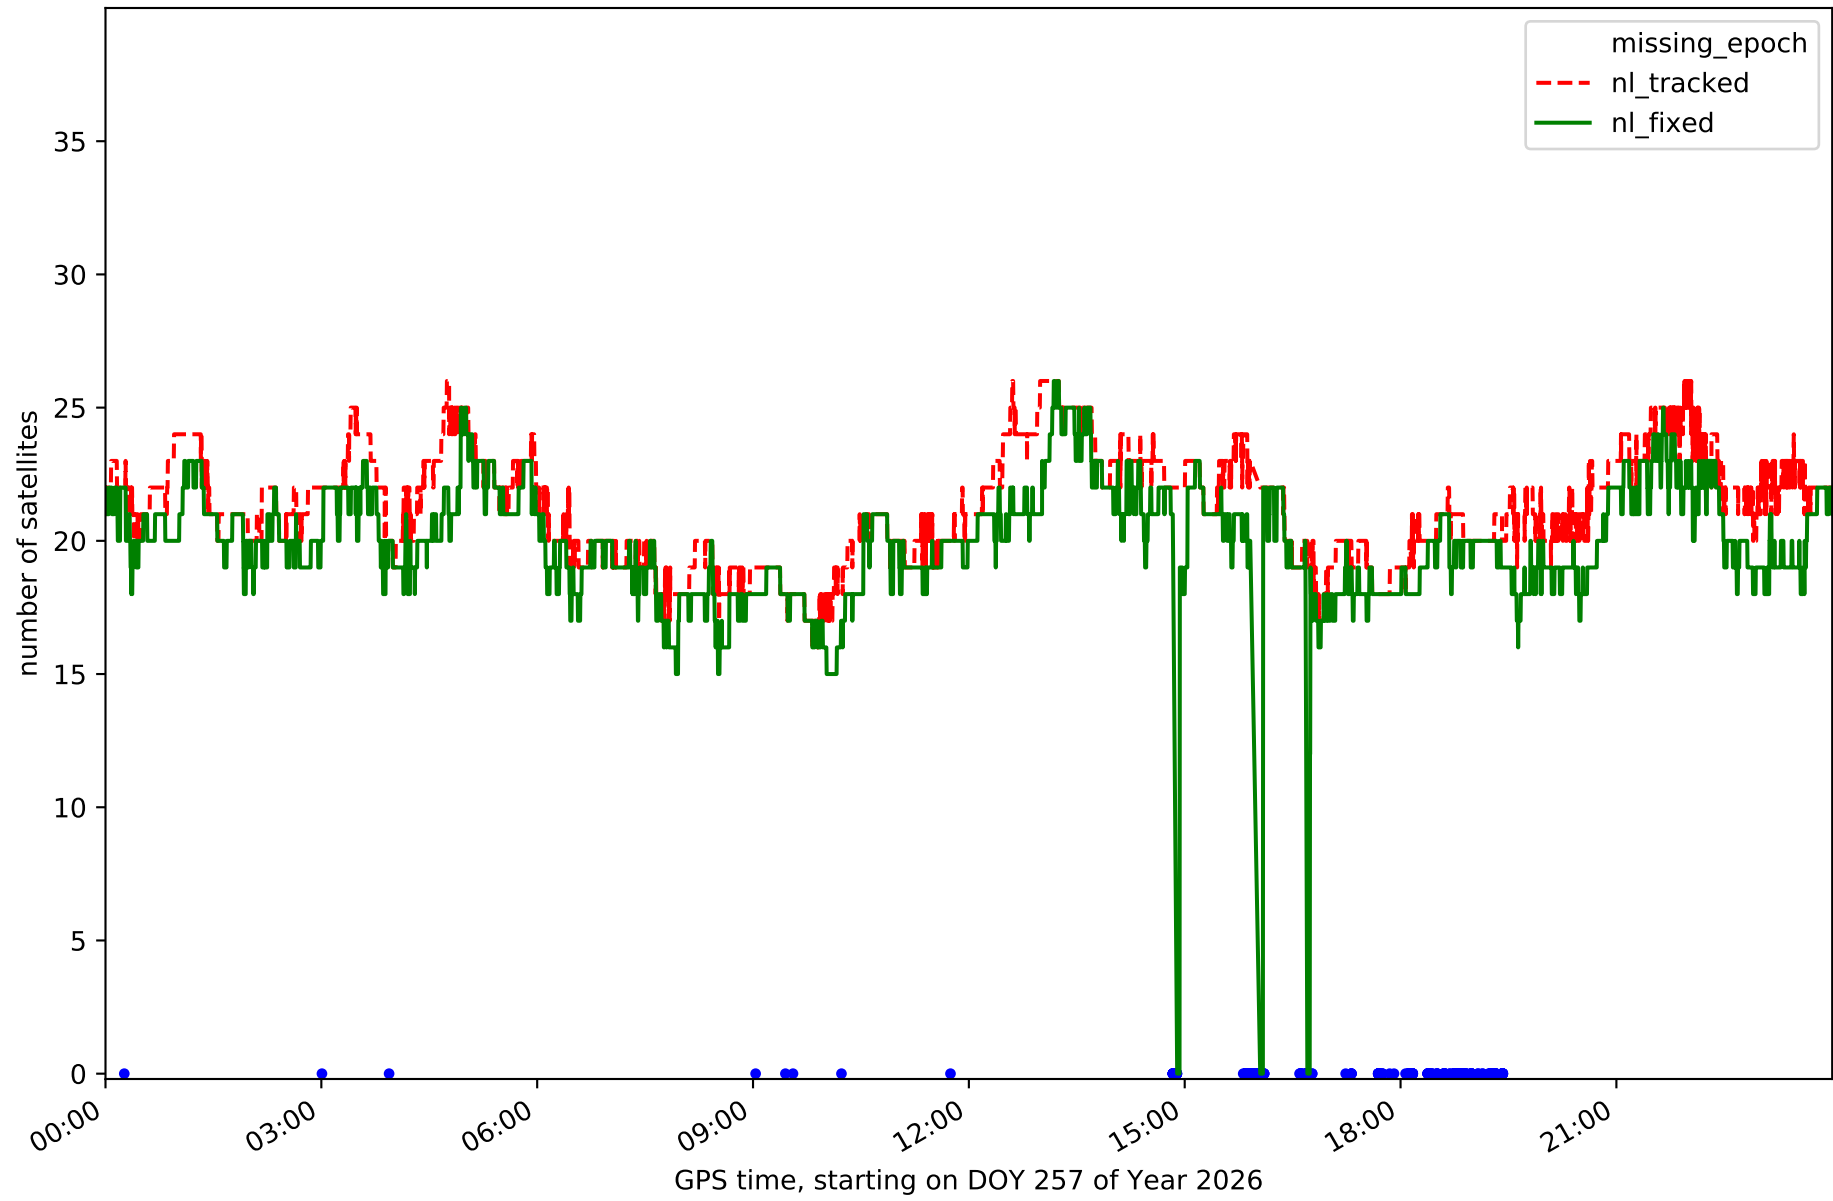


Station GOME in network N32T

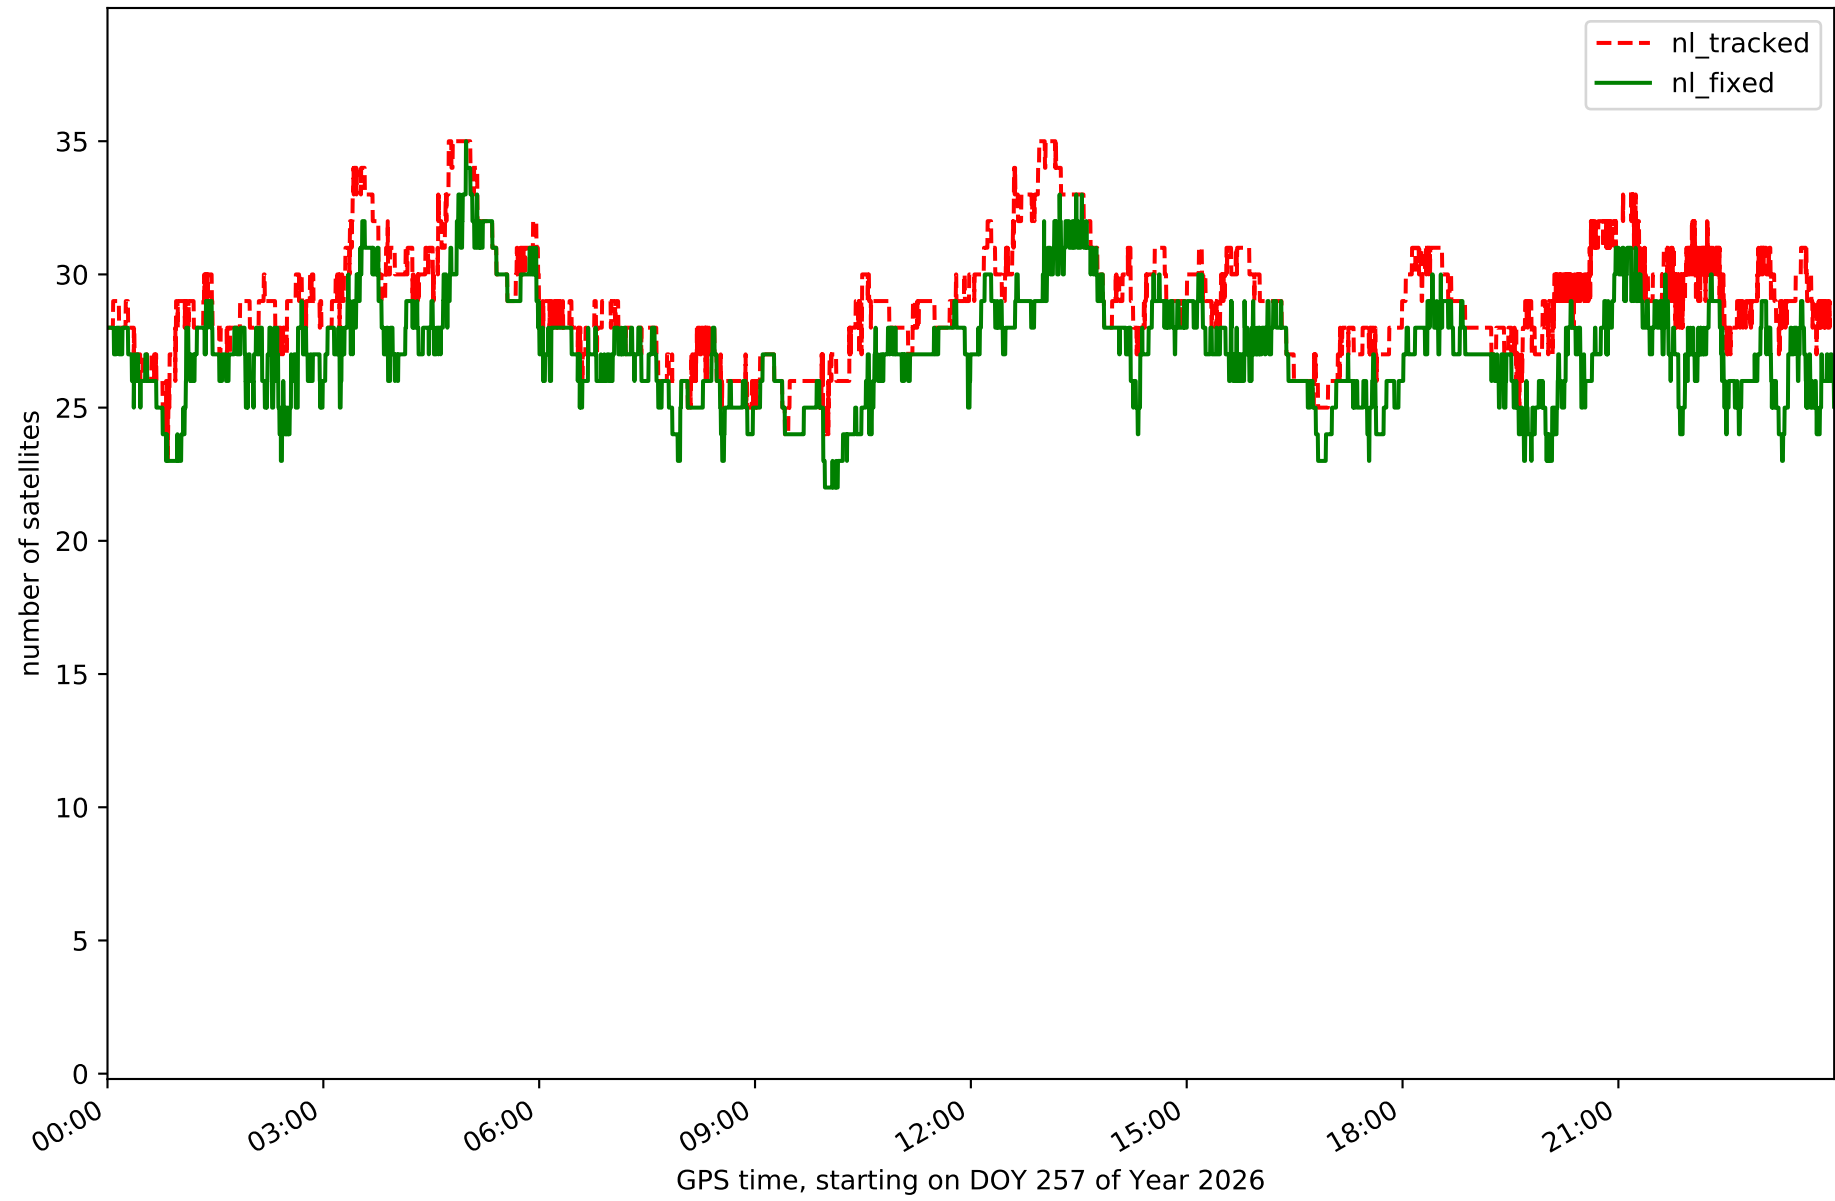


Station IZAN in network N32T

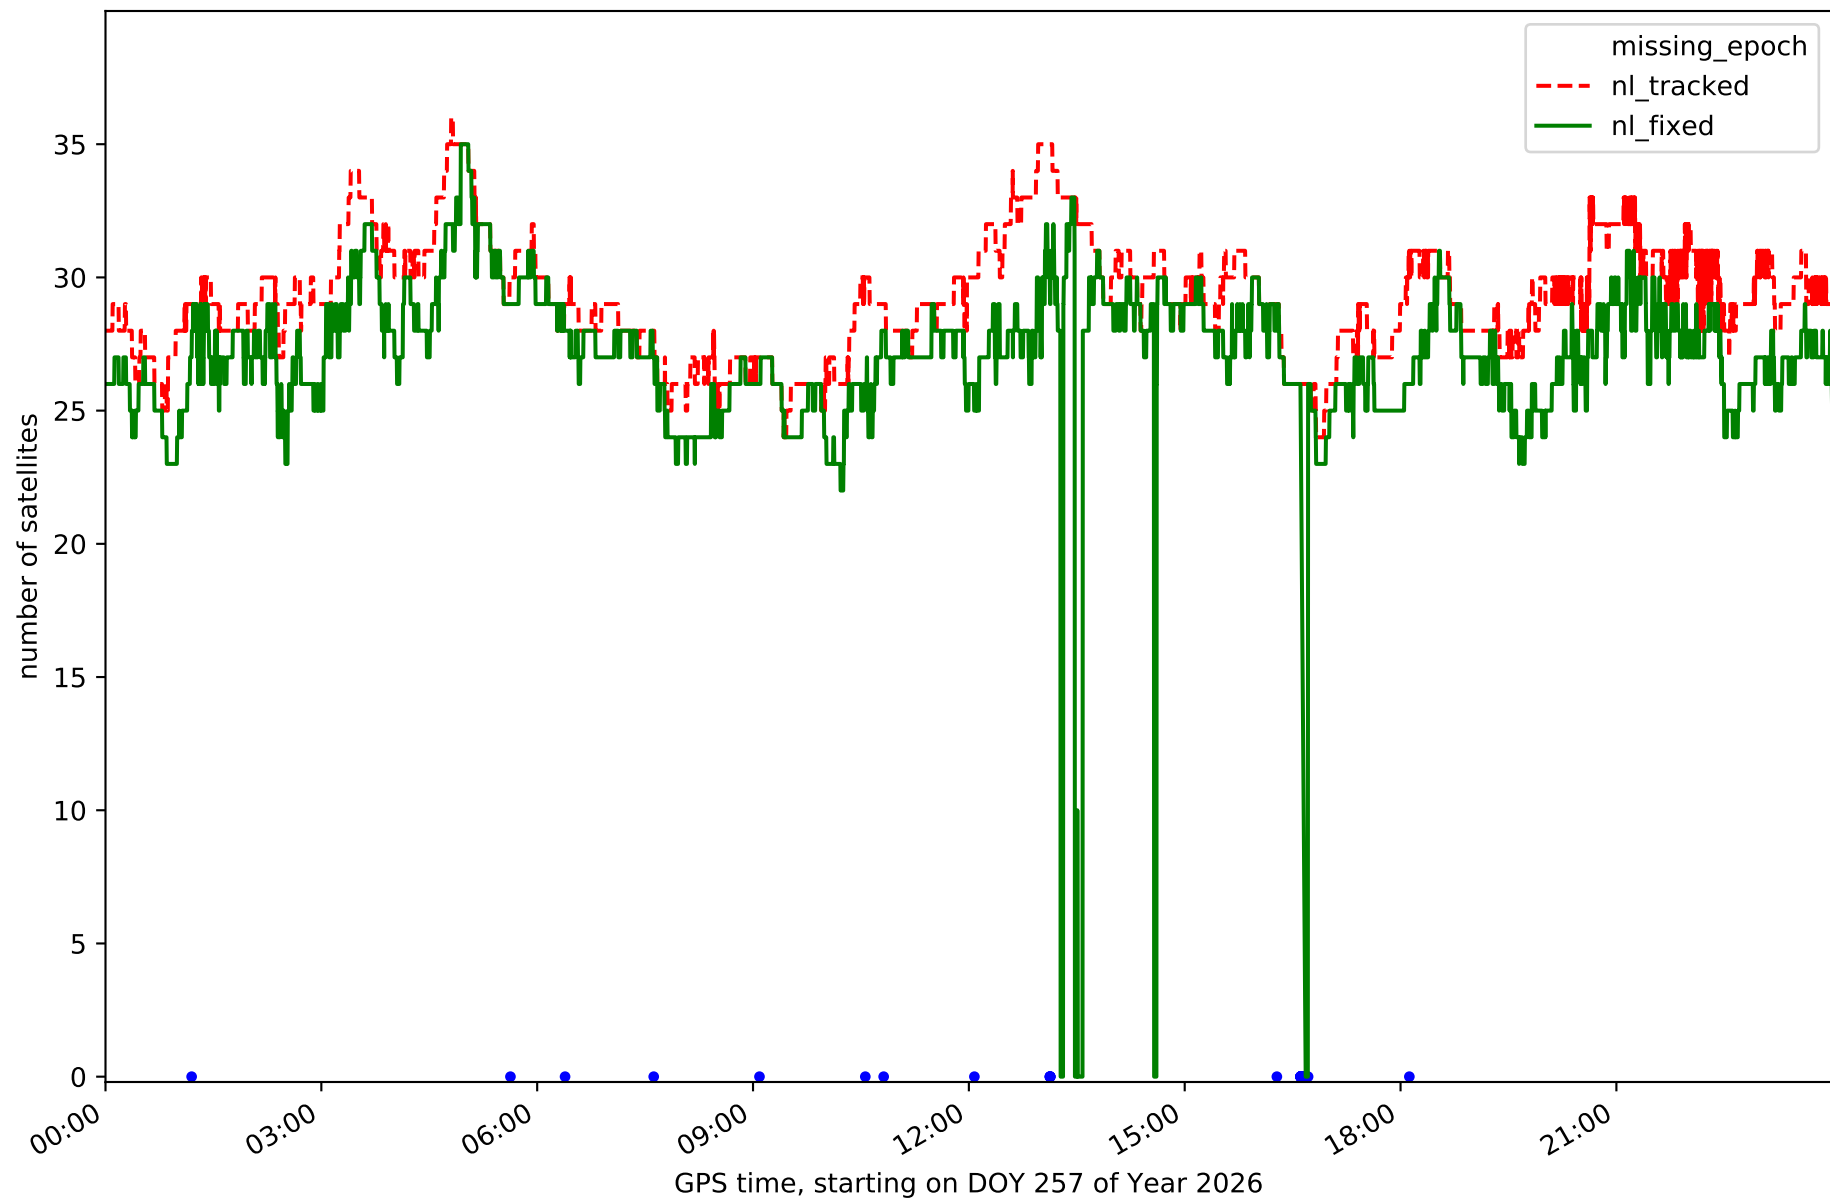


Station LP01 in network N32T

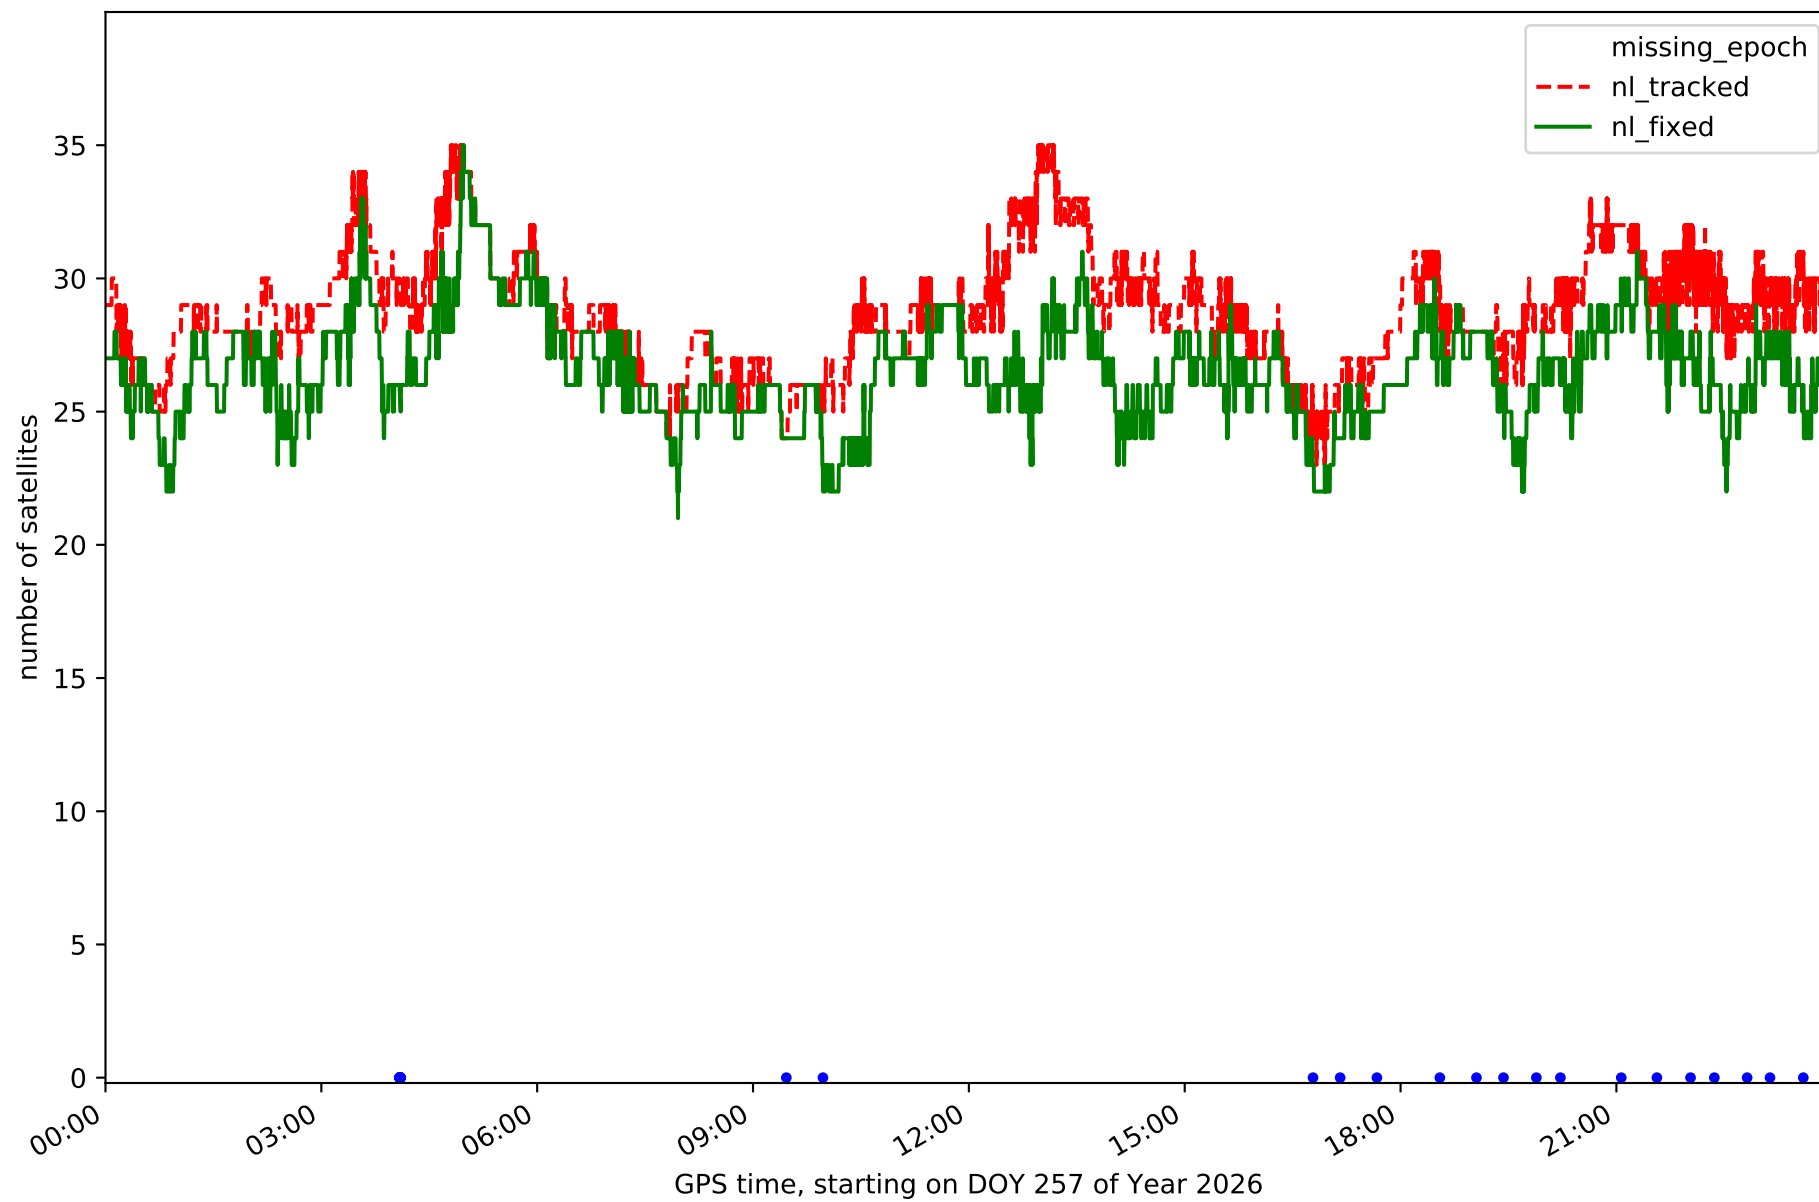


Station LP03 in network N32T

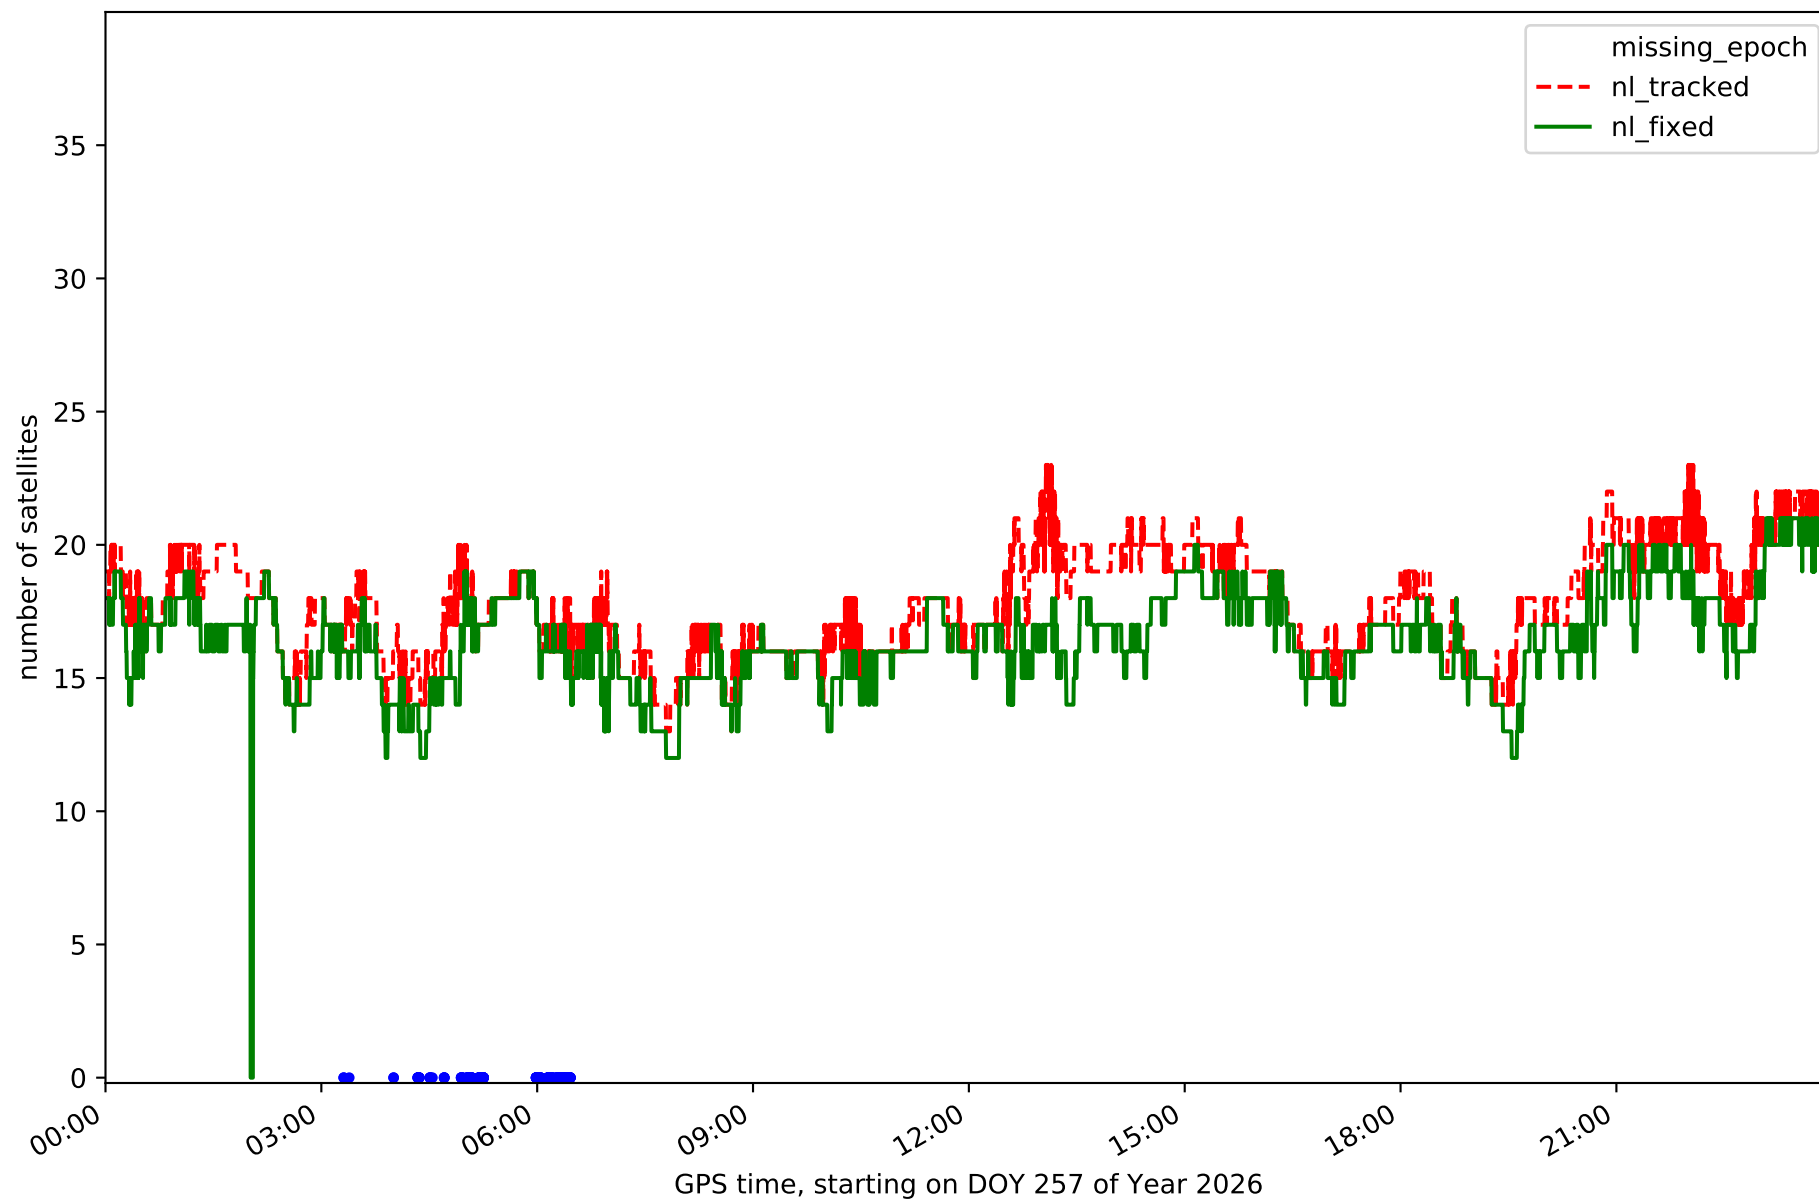


Station LPAL in network N32T

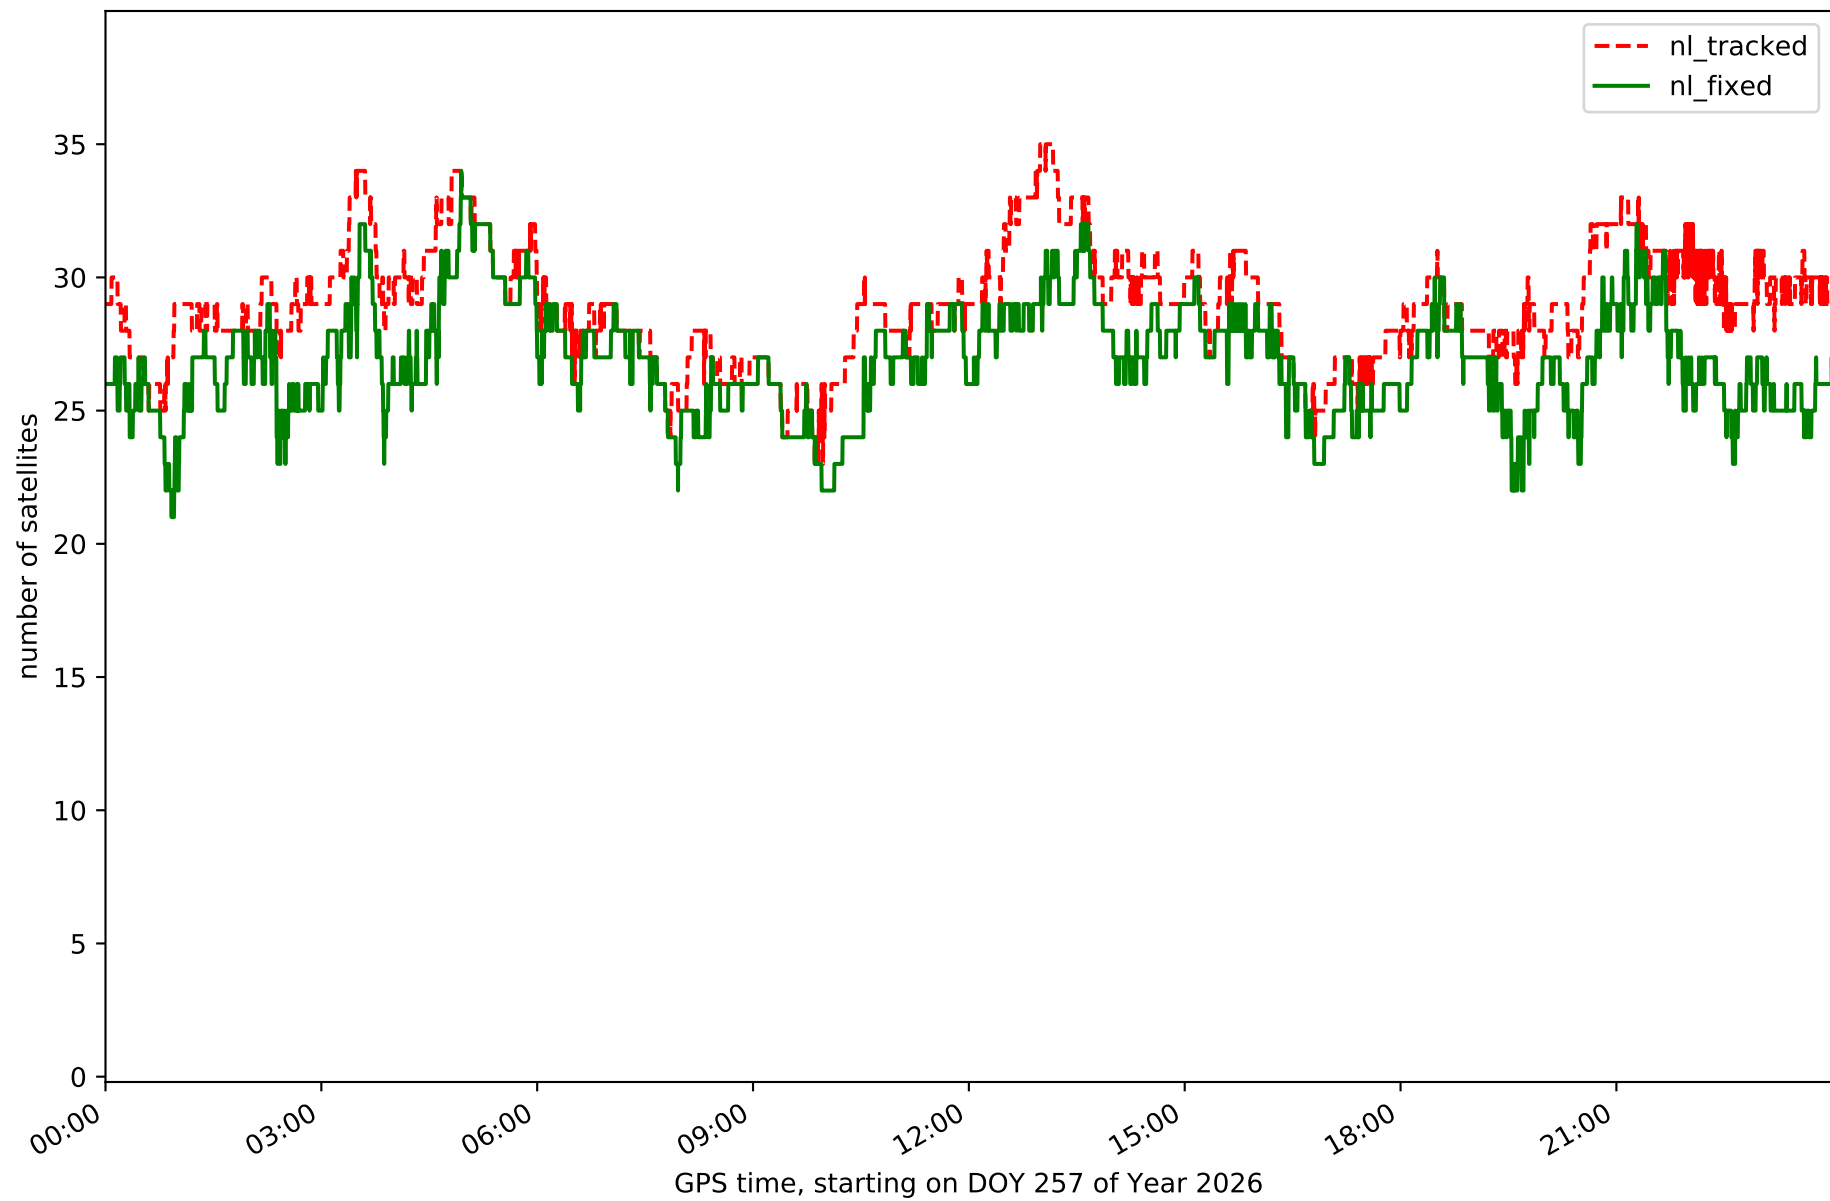


Station LRES in network N32T

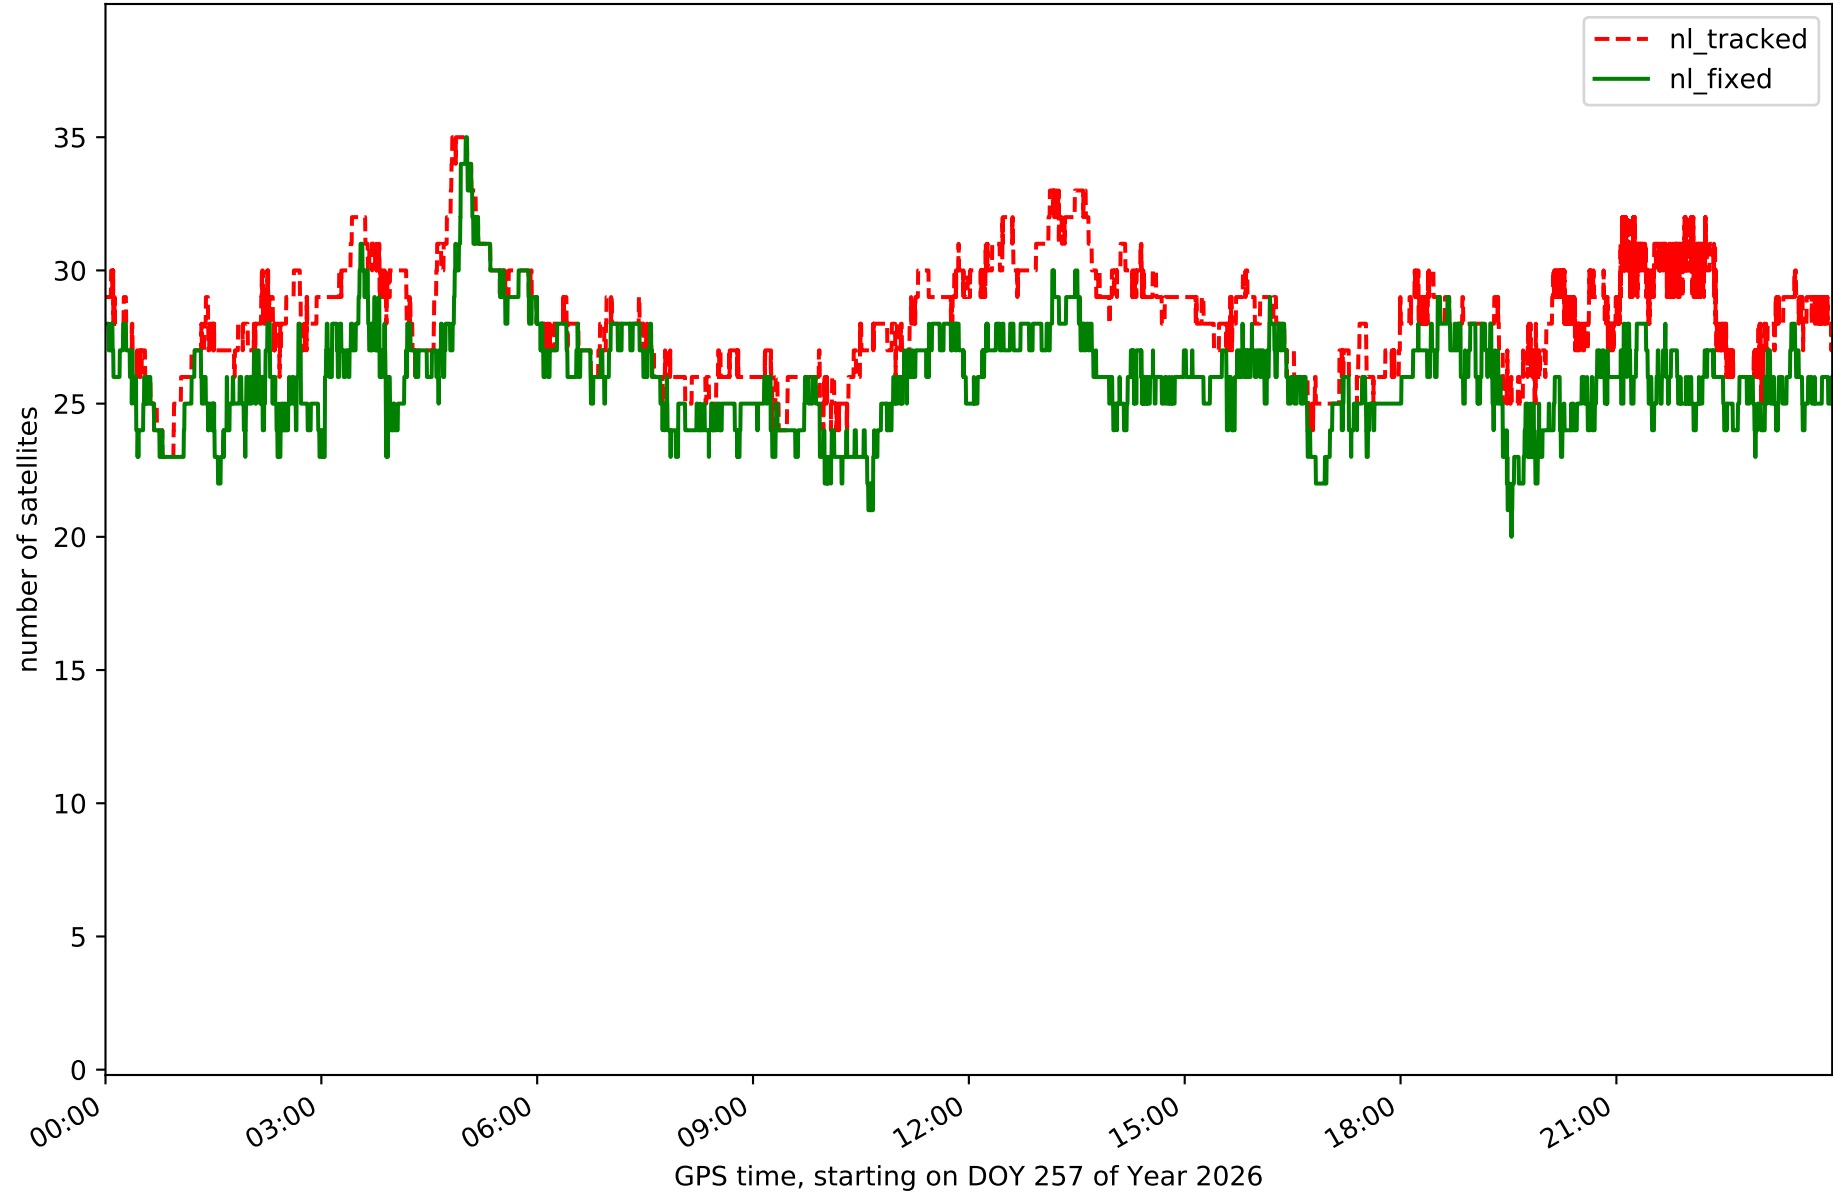


Station TN01 in network N32T

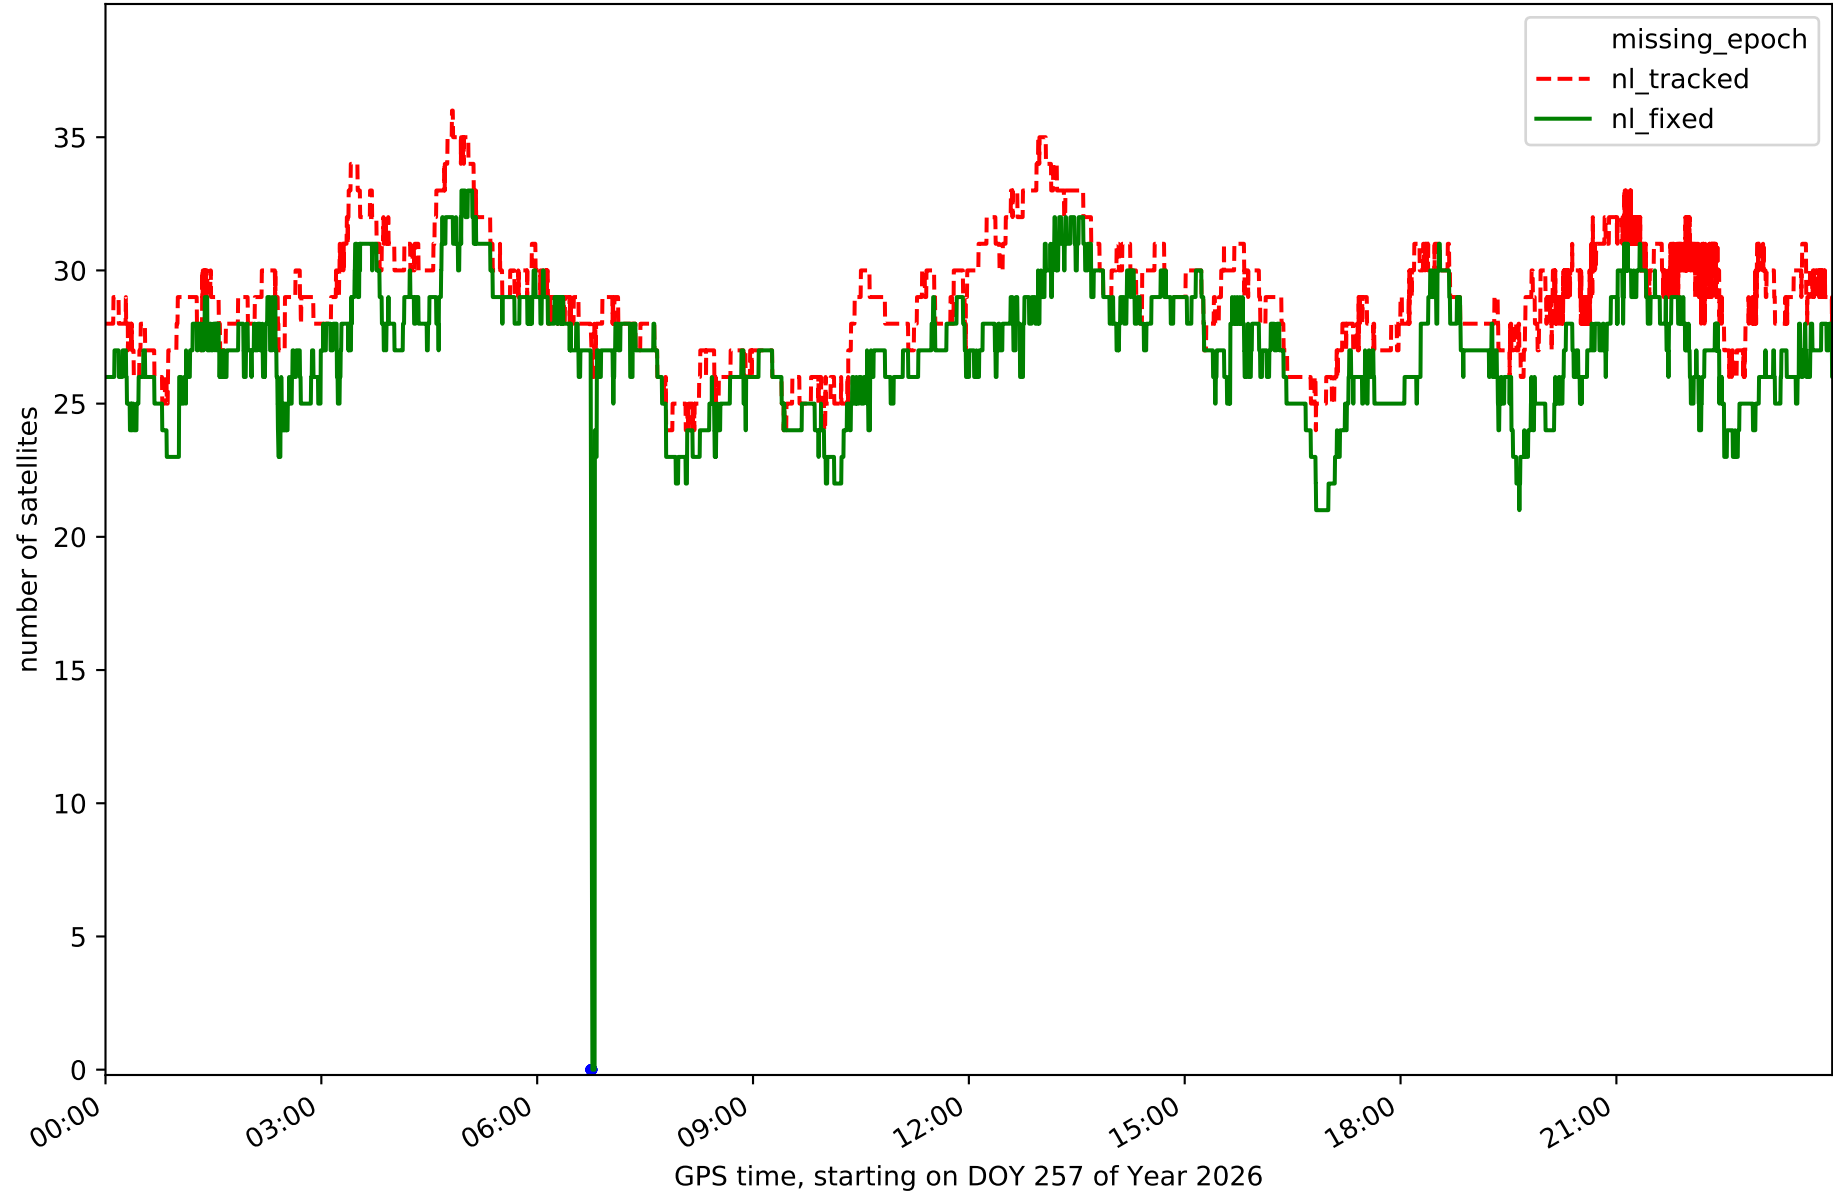


Station TN02 in network N32T

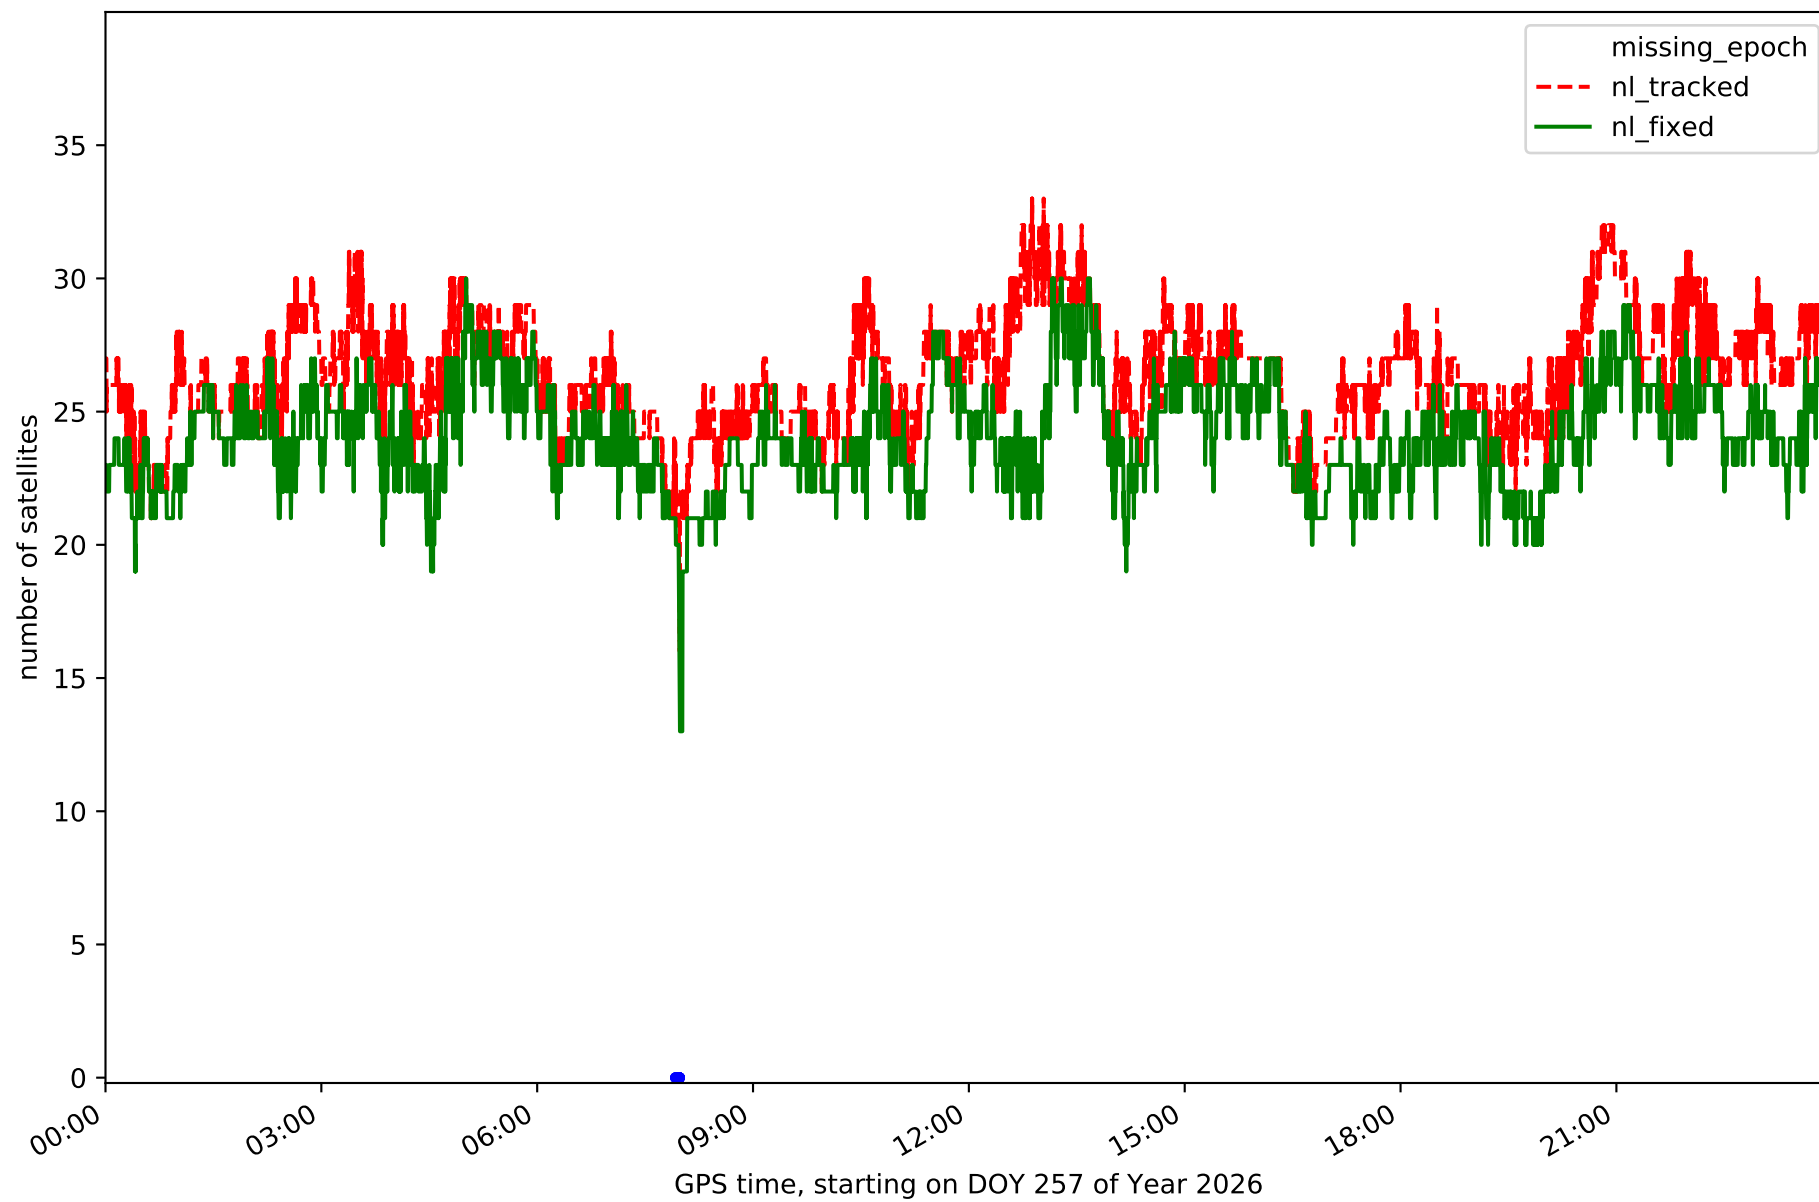


Station TN03 in network N32T

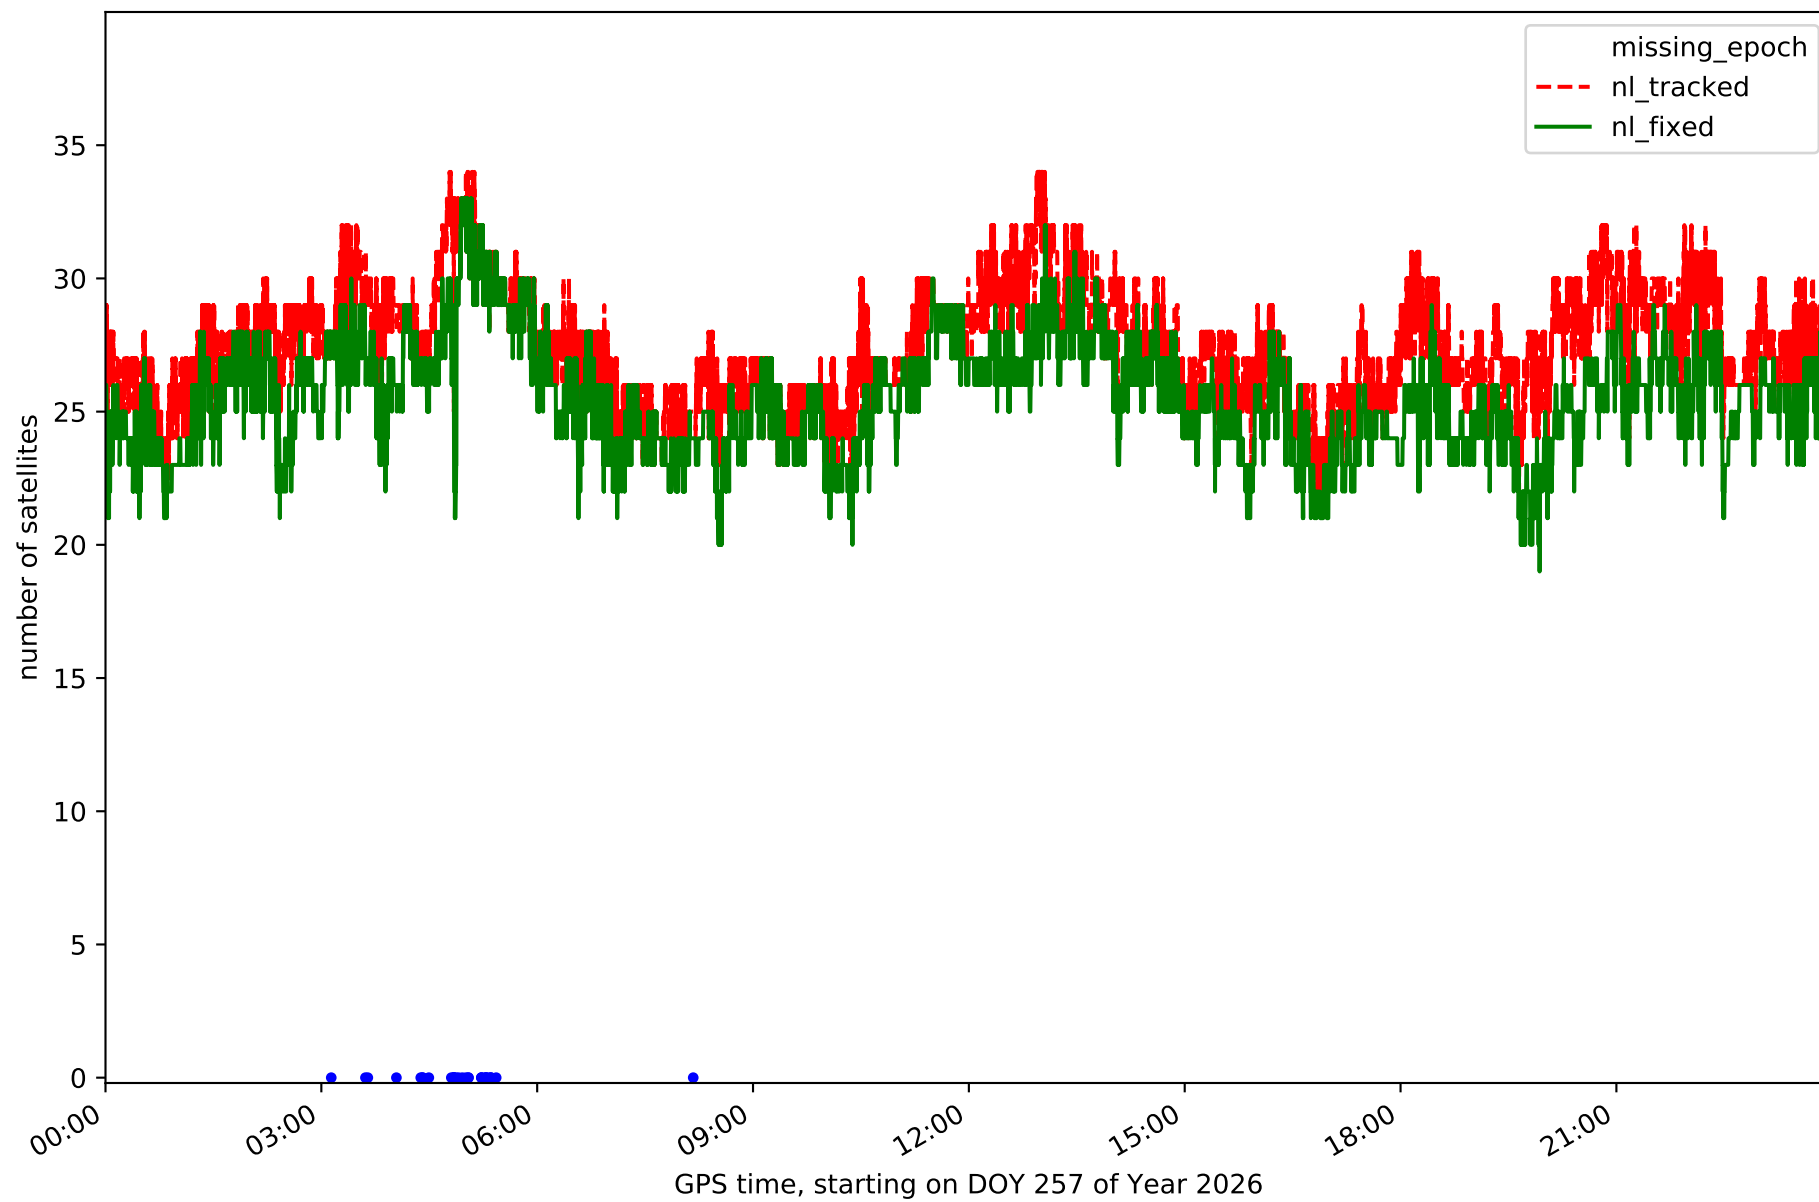


Station TN06 in network N32T

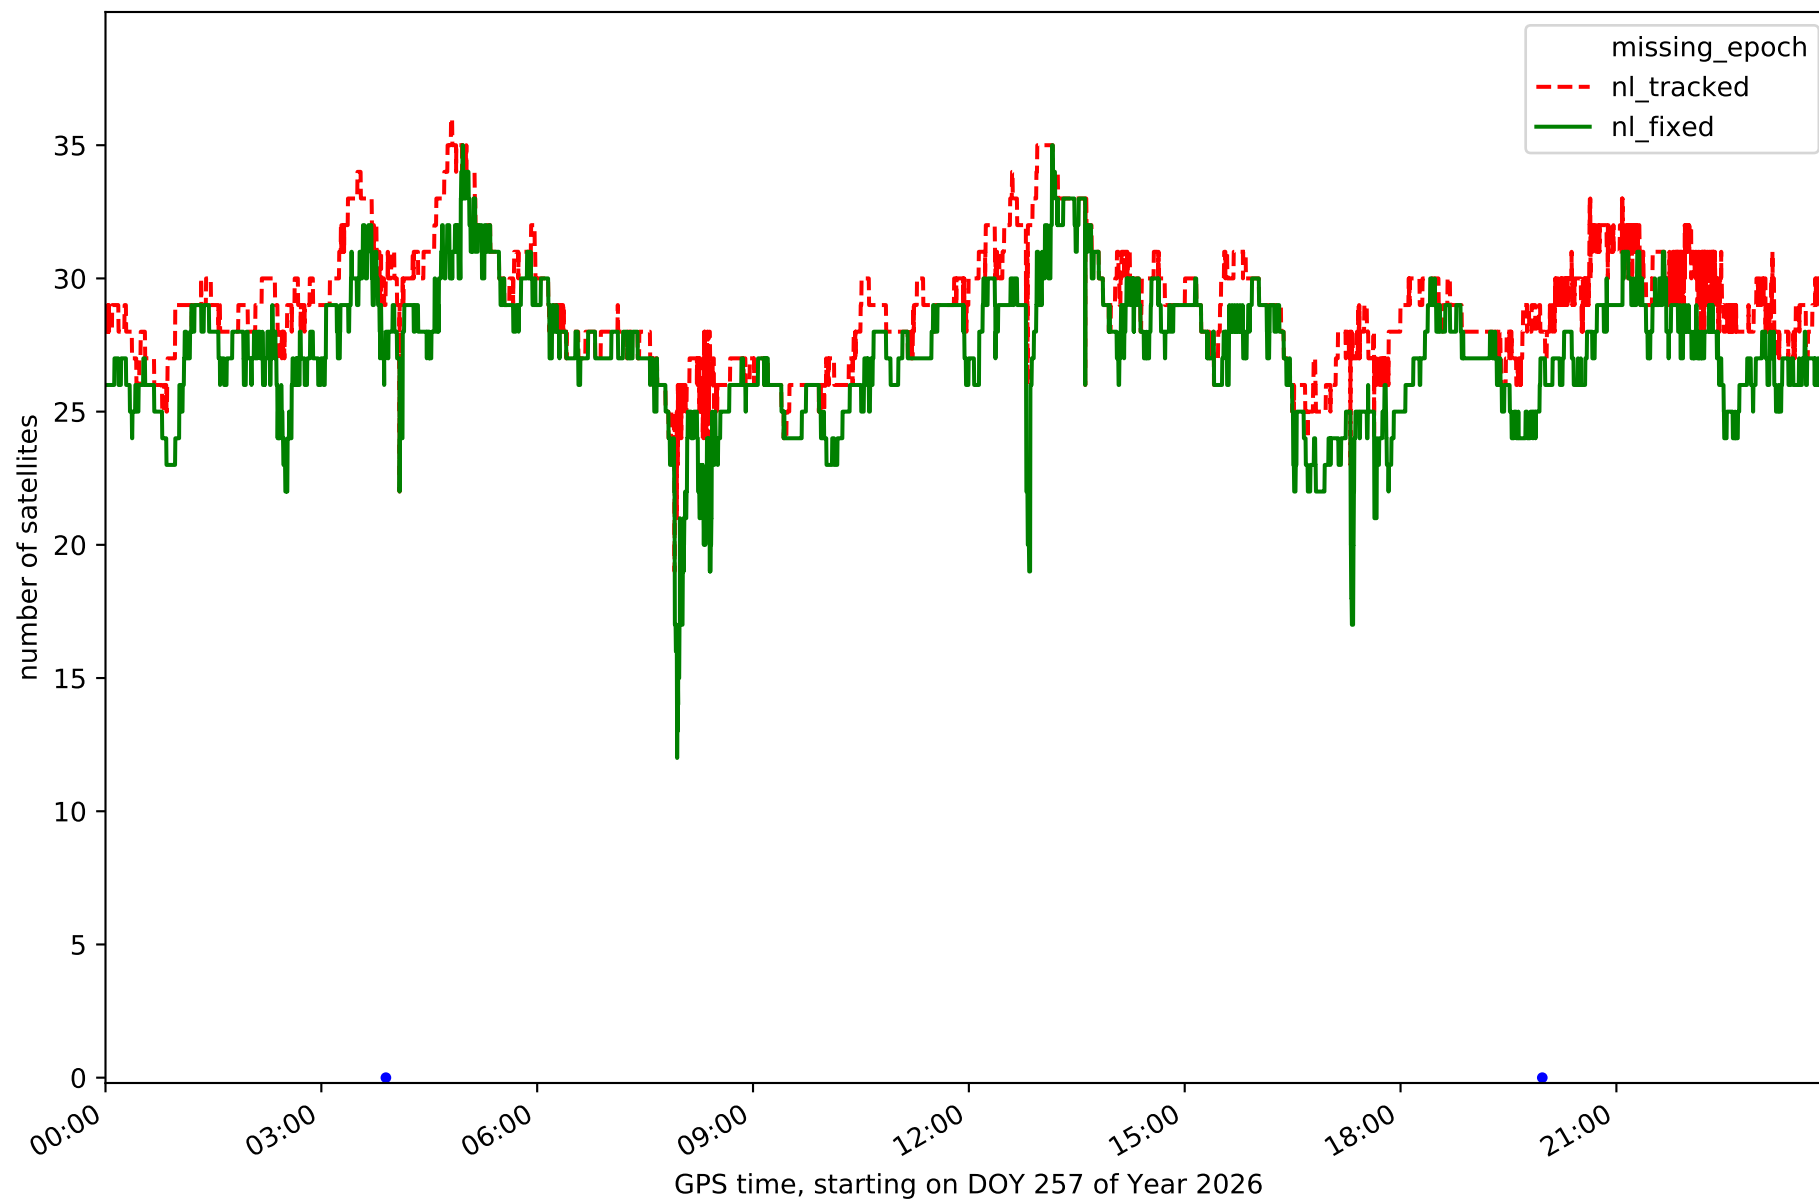


Station TN09 in network N32T

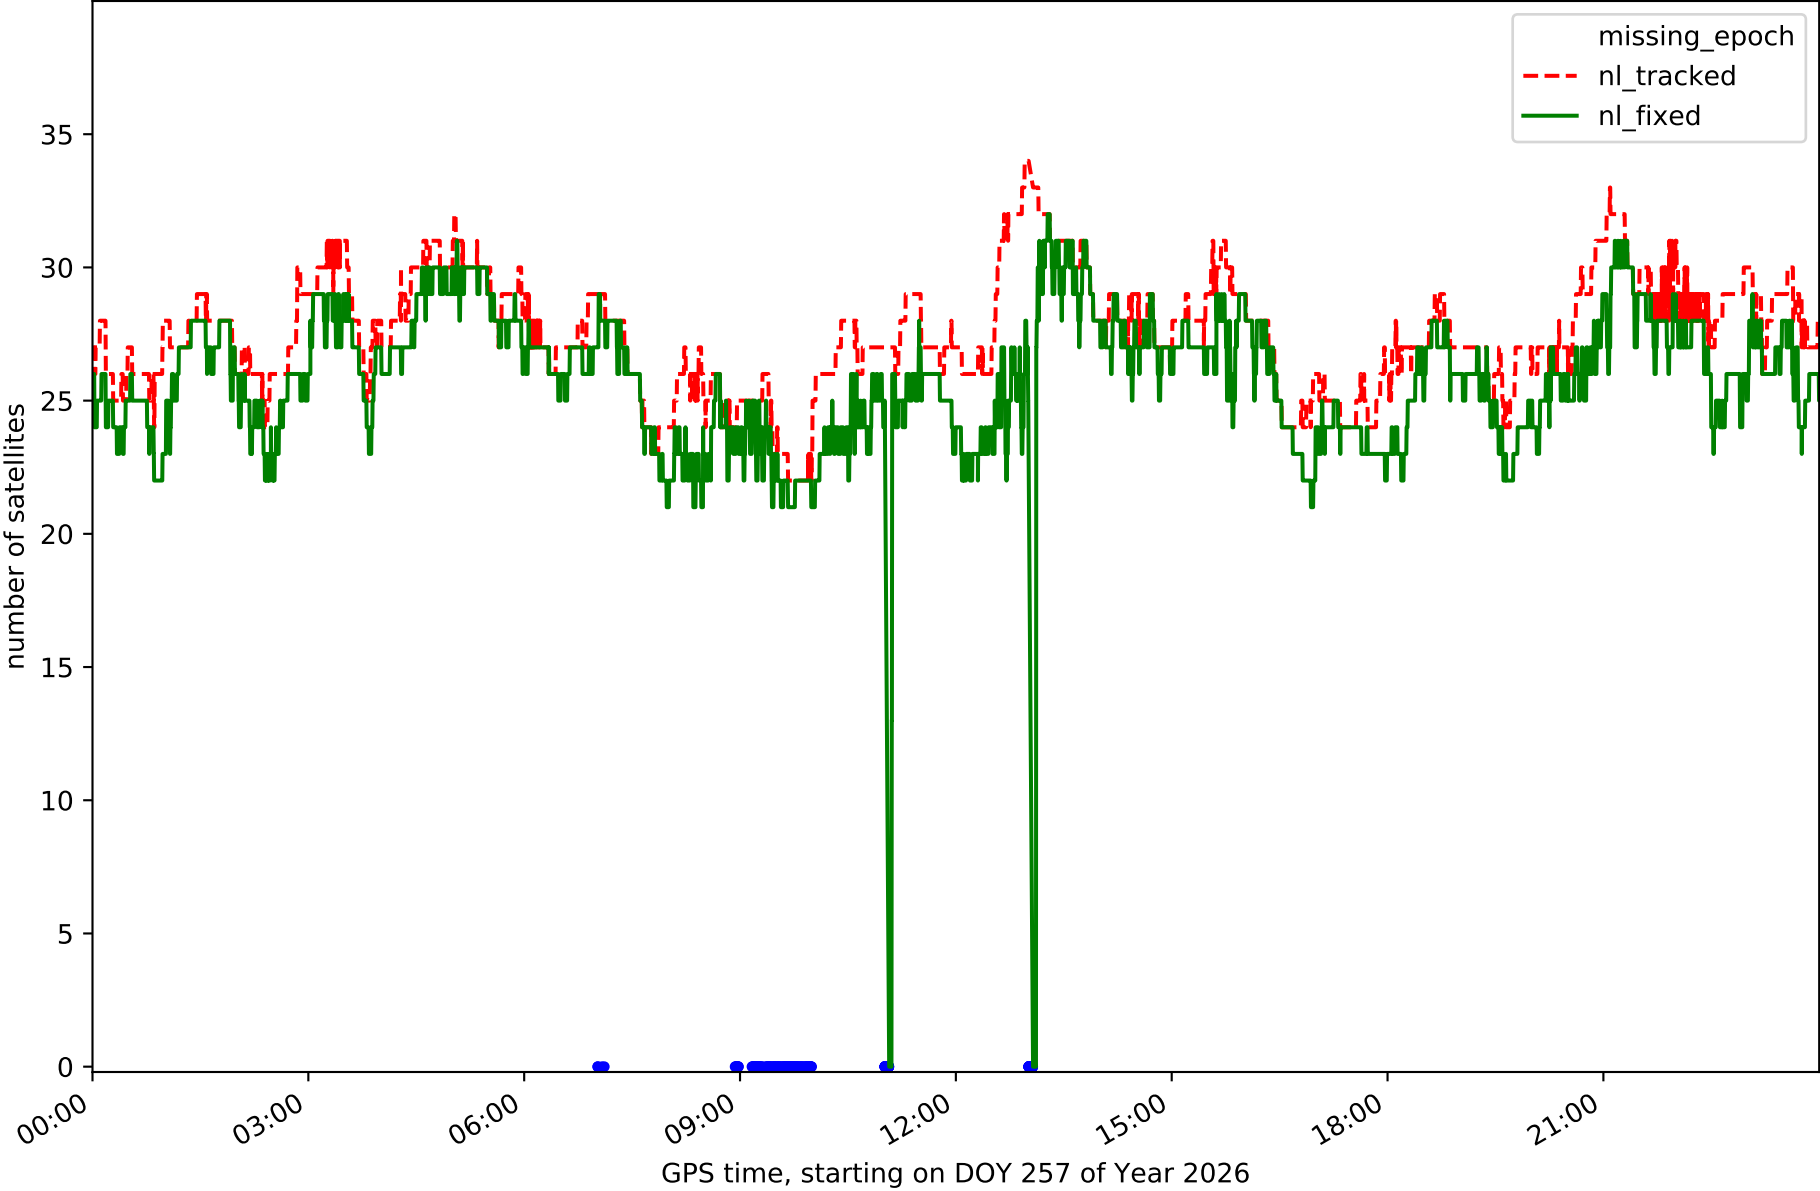


Station TE11 in network N32T

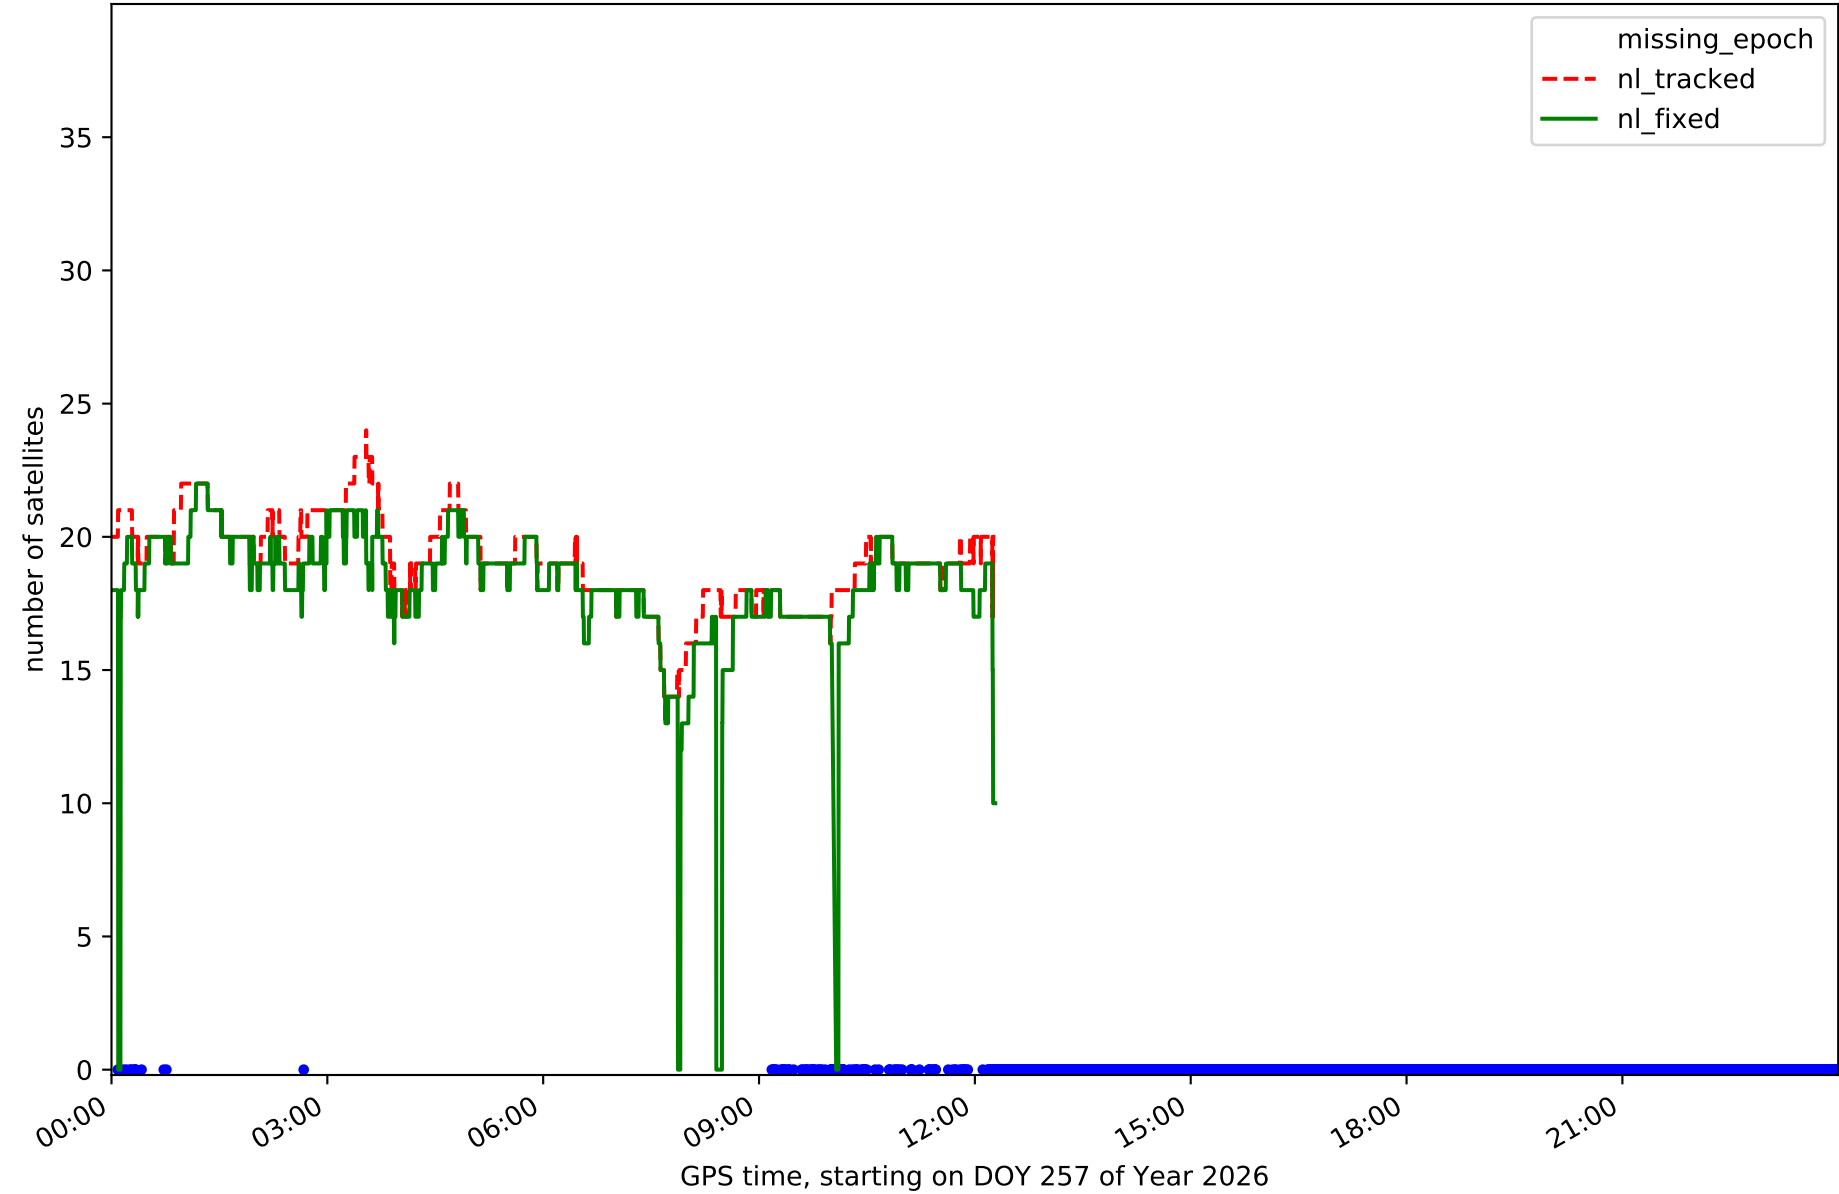


RefCheck for station EH01 in network N32T

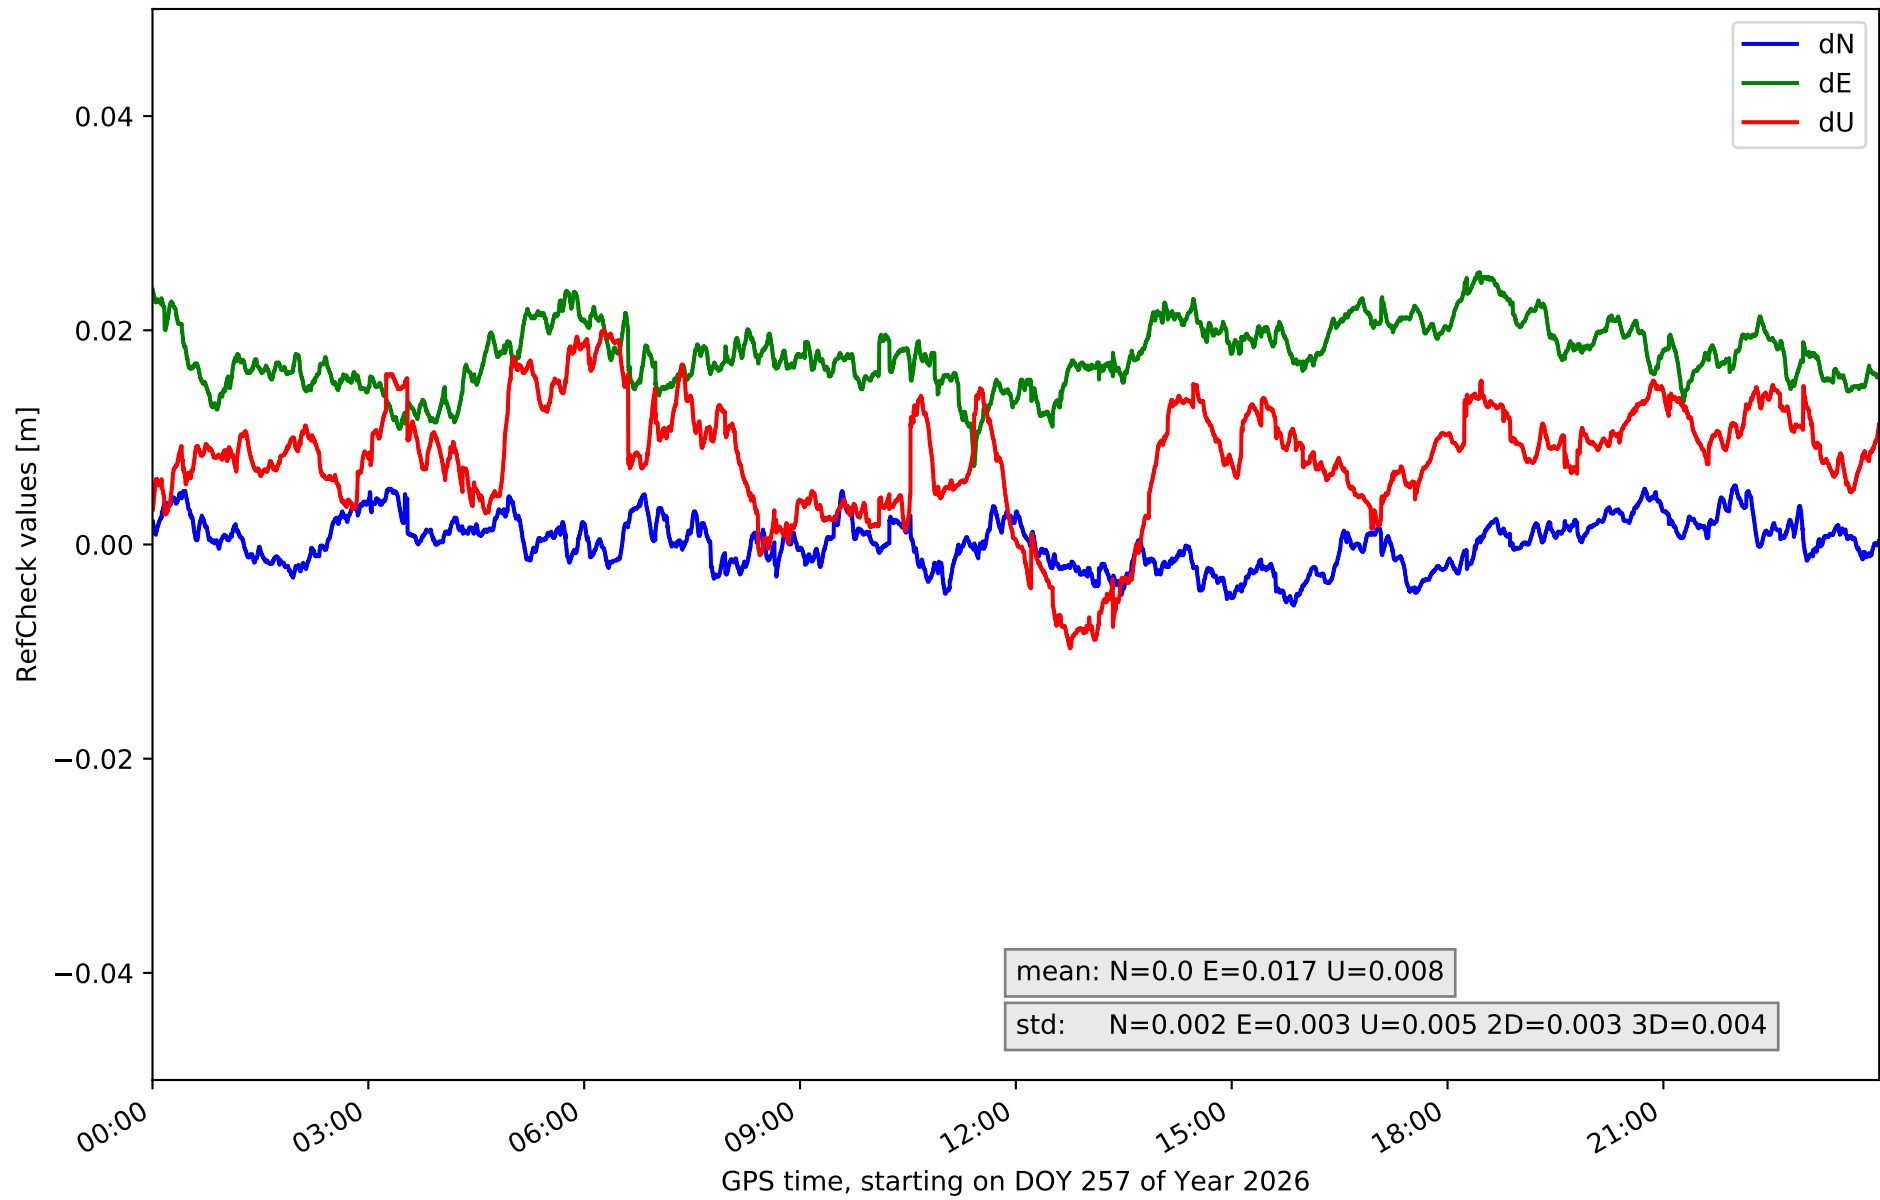


RefCheck for station EH02 in network N32T

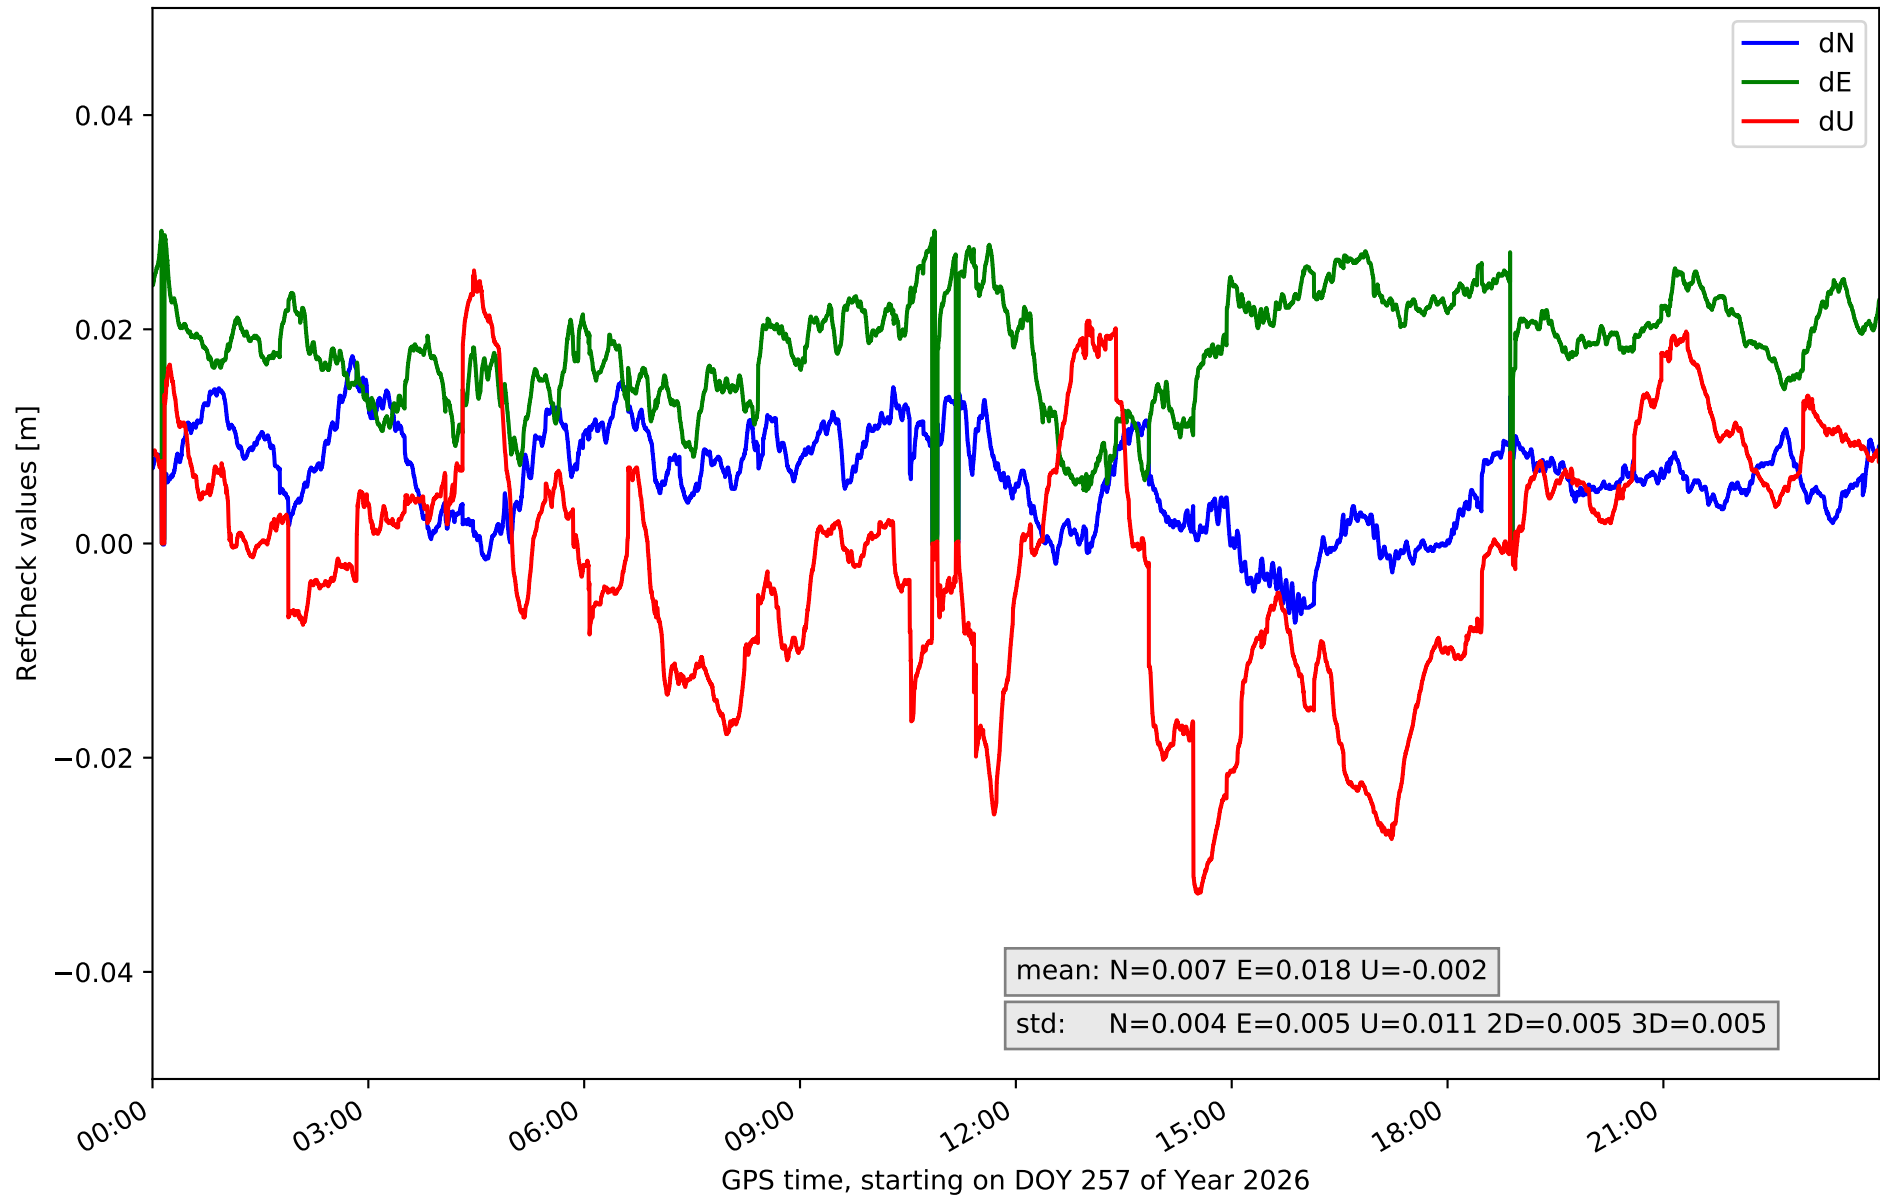


RefCheck for station GOM1 in network N32T

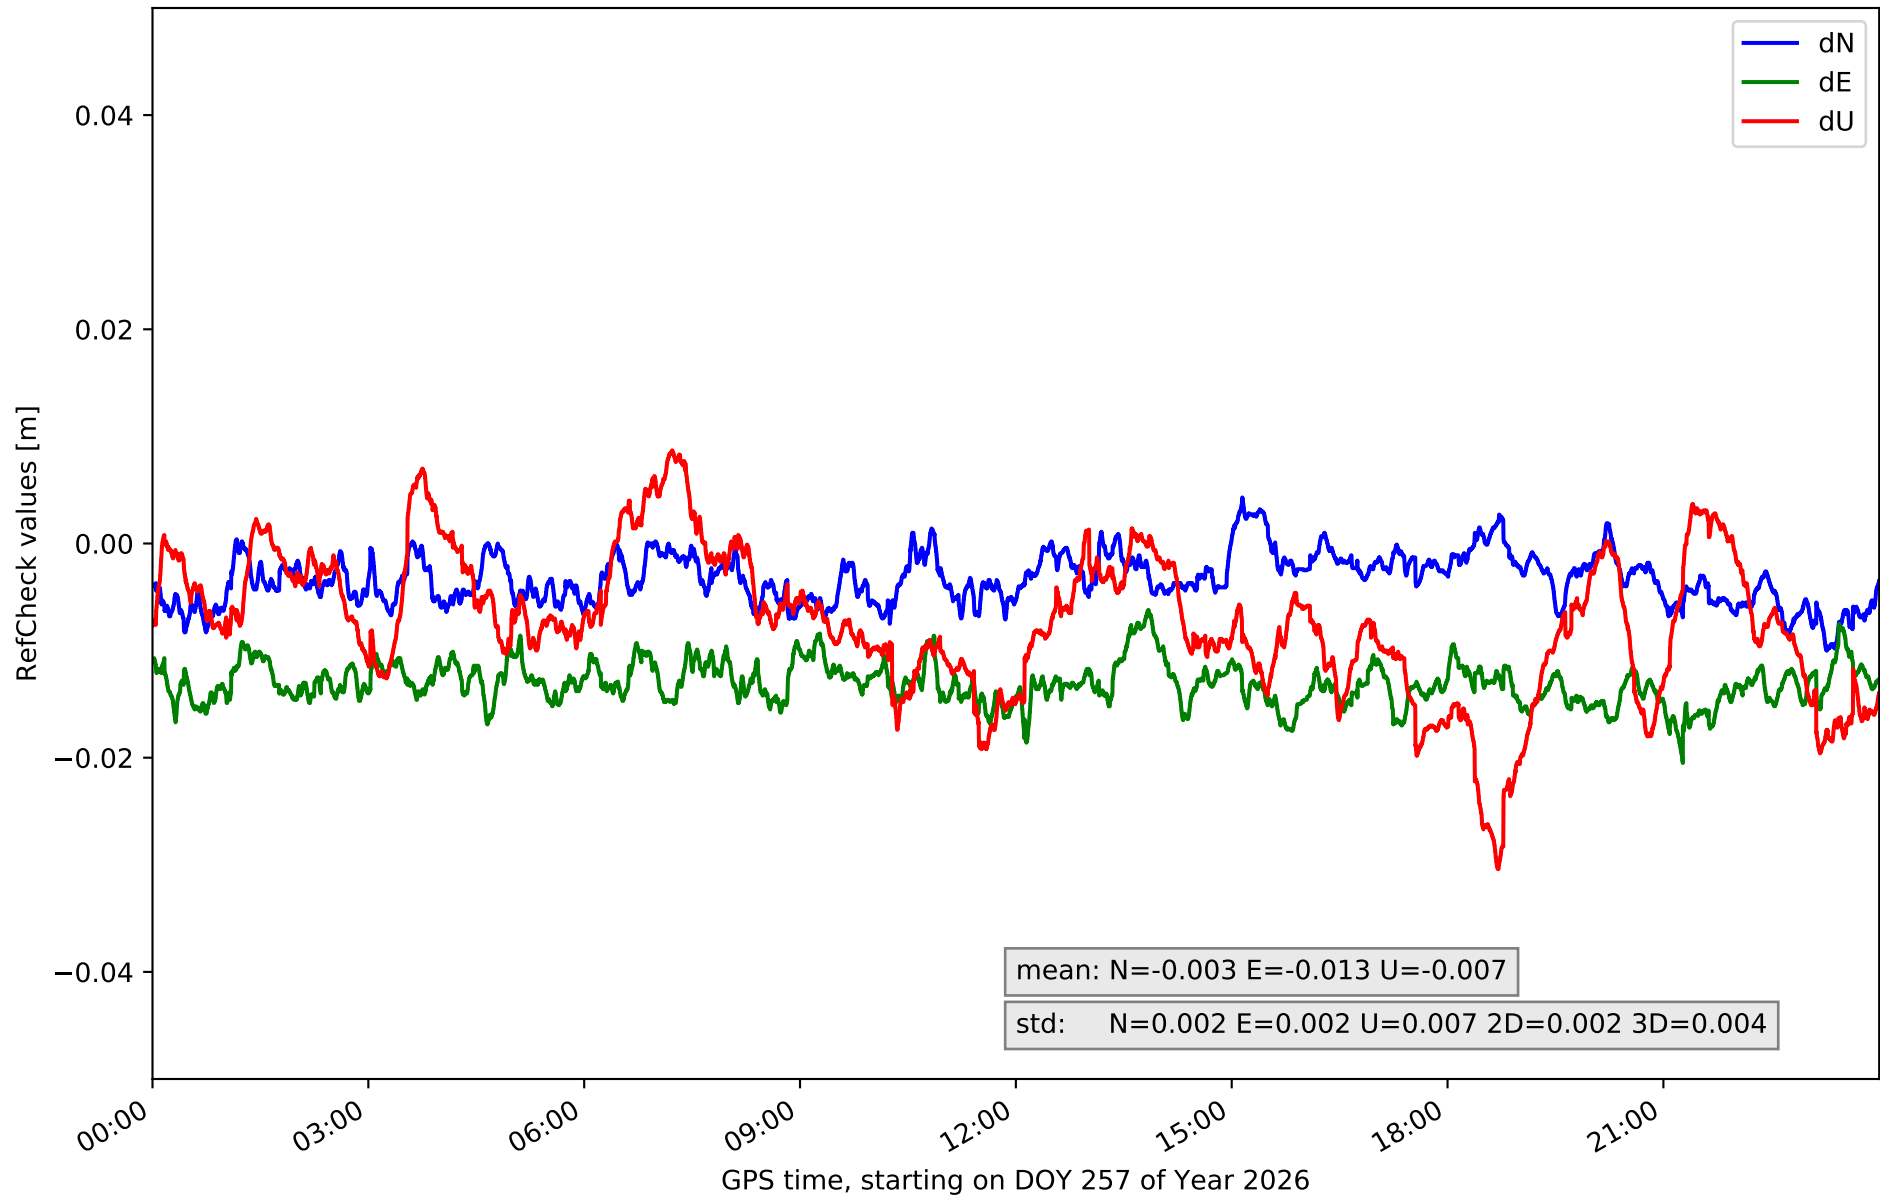


RefCheck for station GOME in network N32T

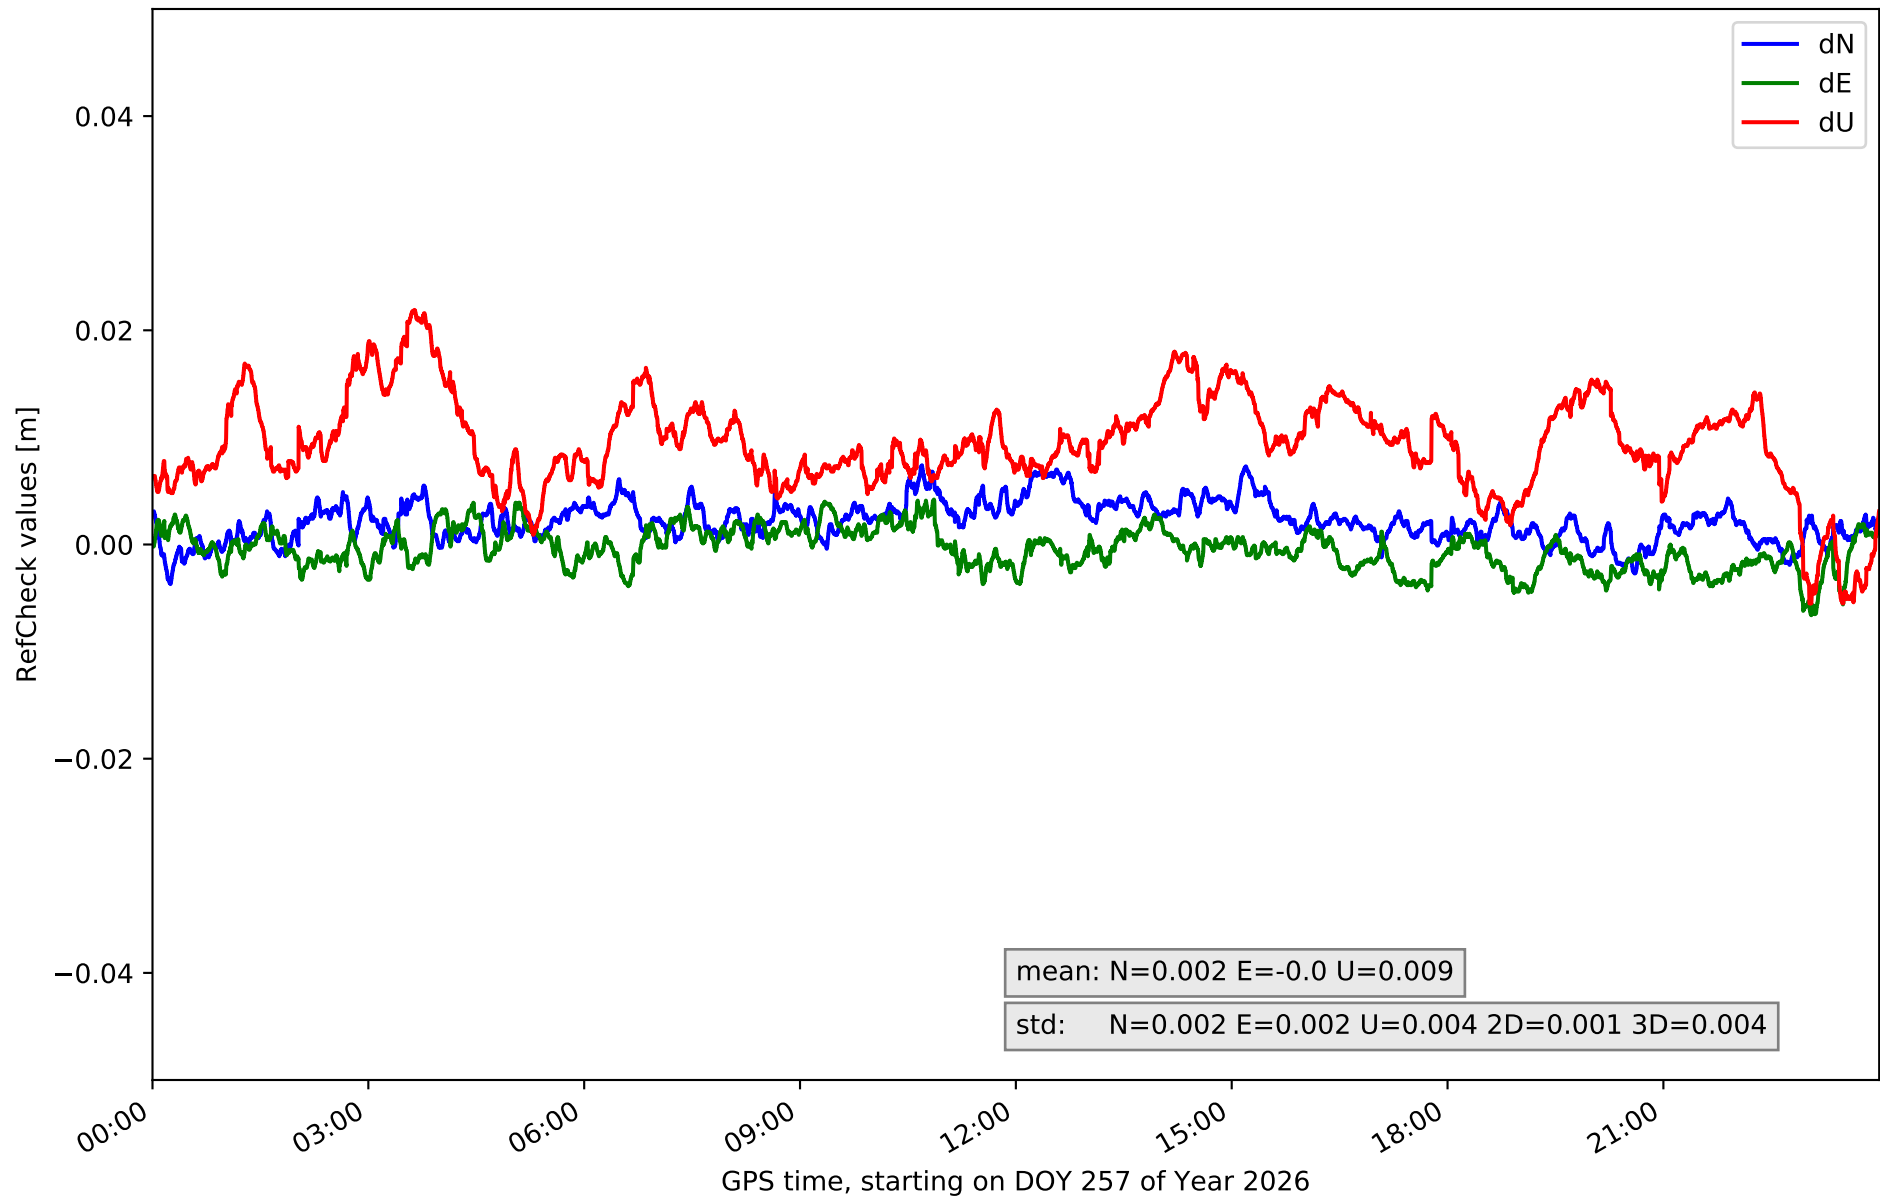


RefCheck for station IZAN in network N32T

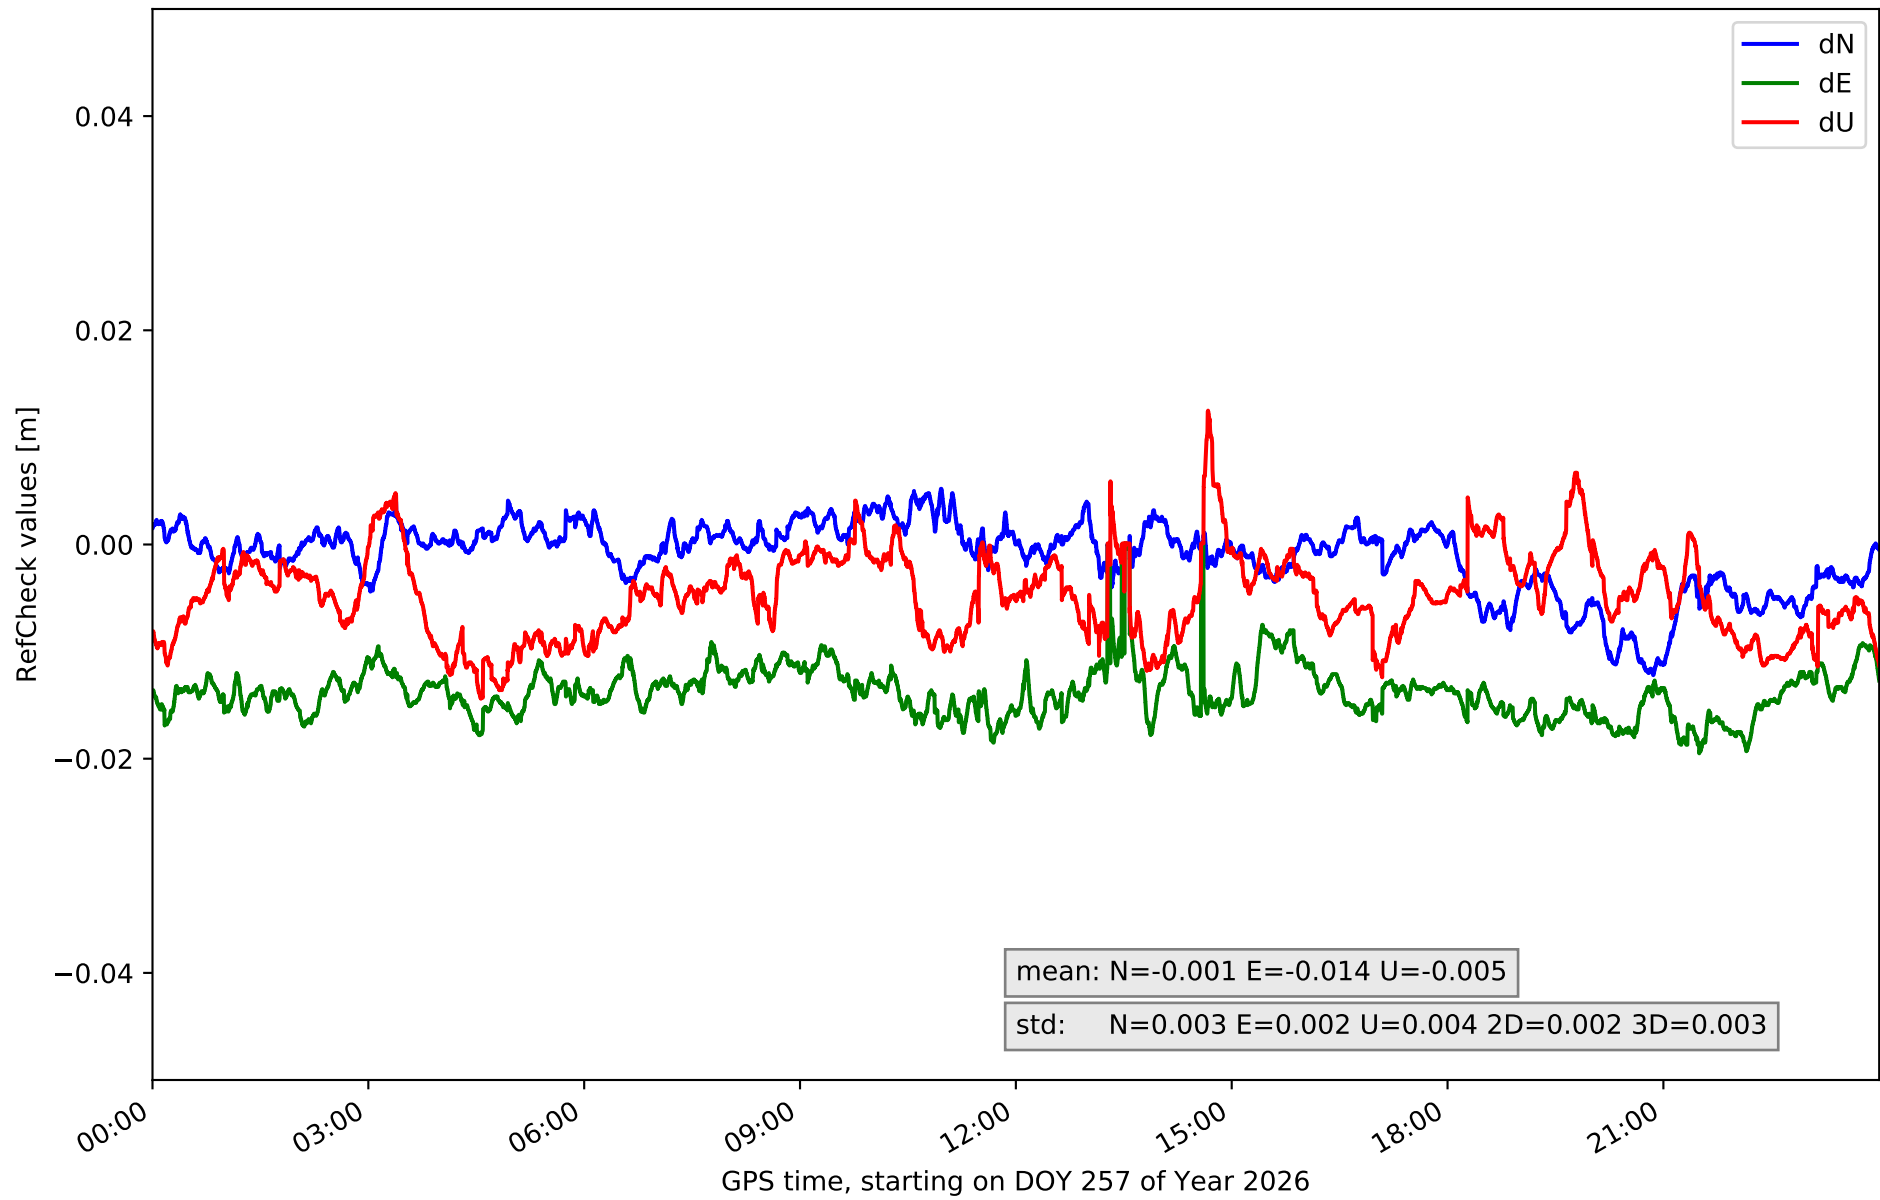


RefCheck for station LP01 in network N32T

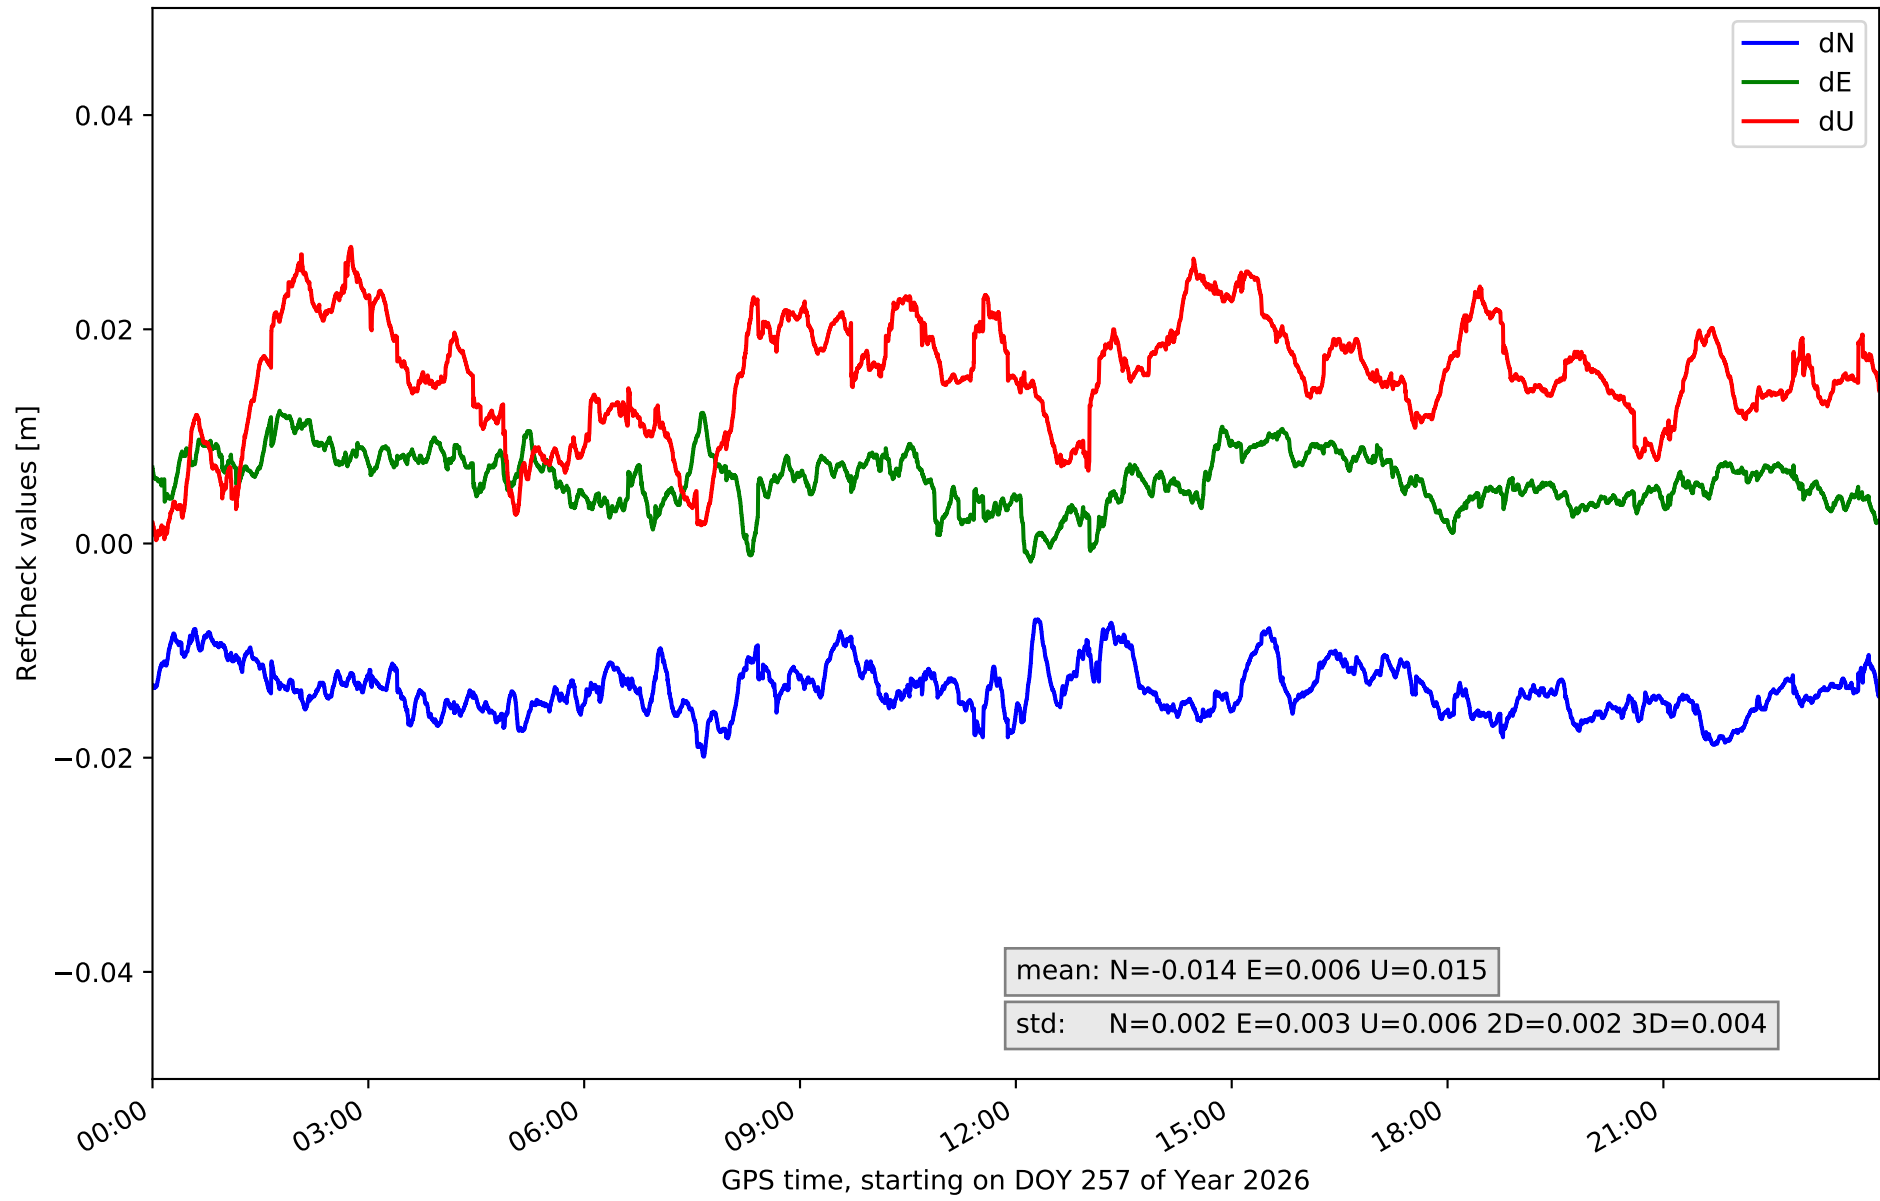


RefCheck for station LP03 in network N32T

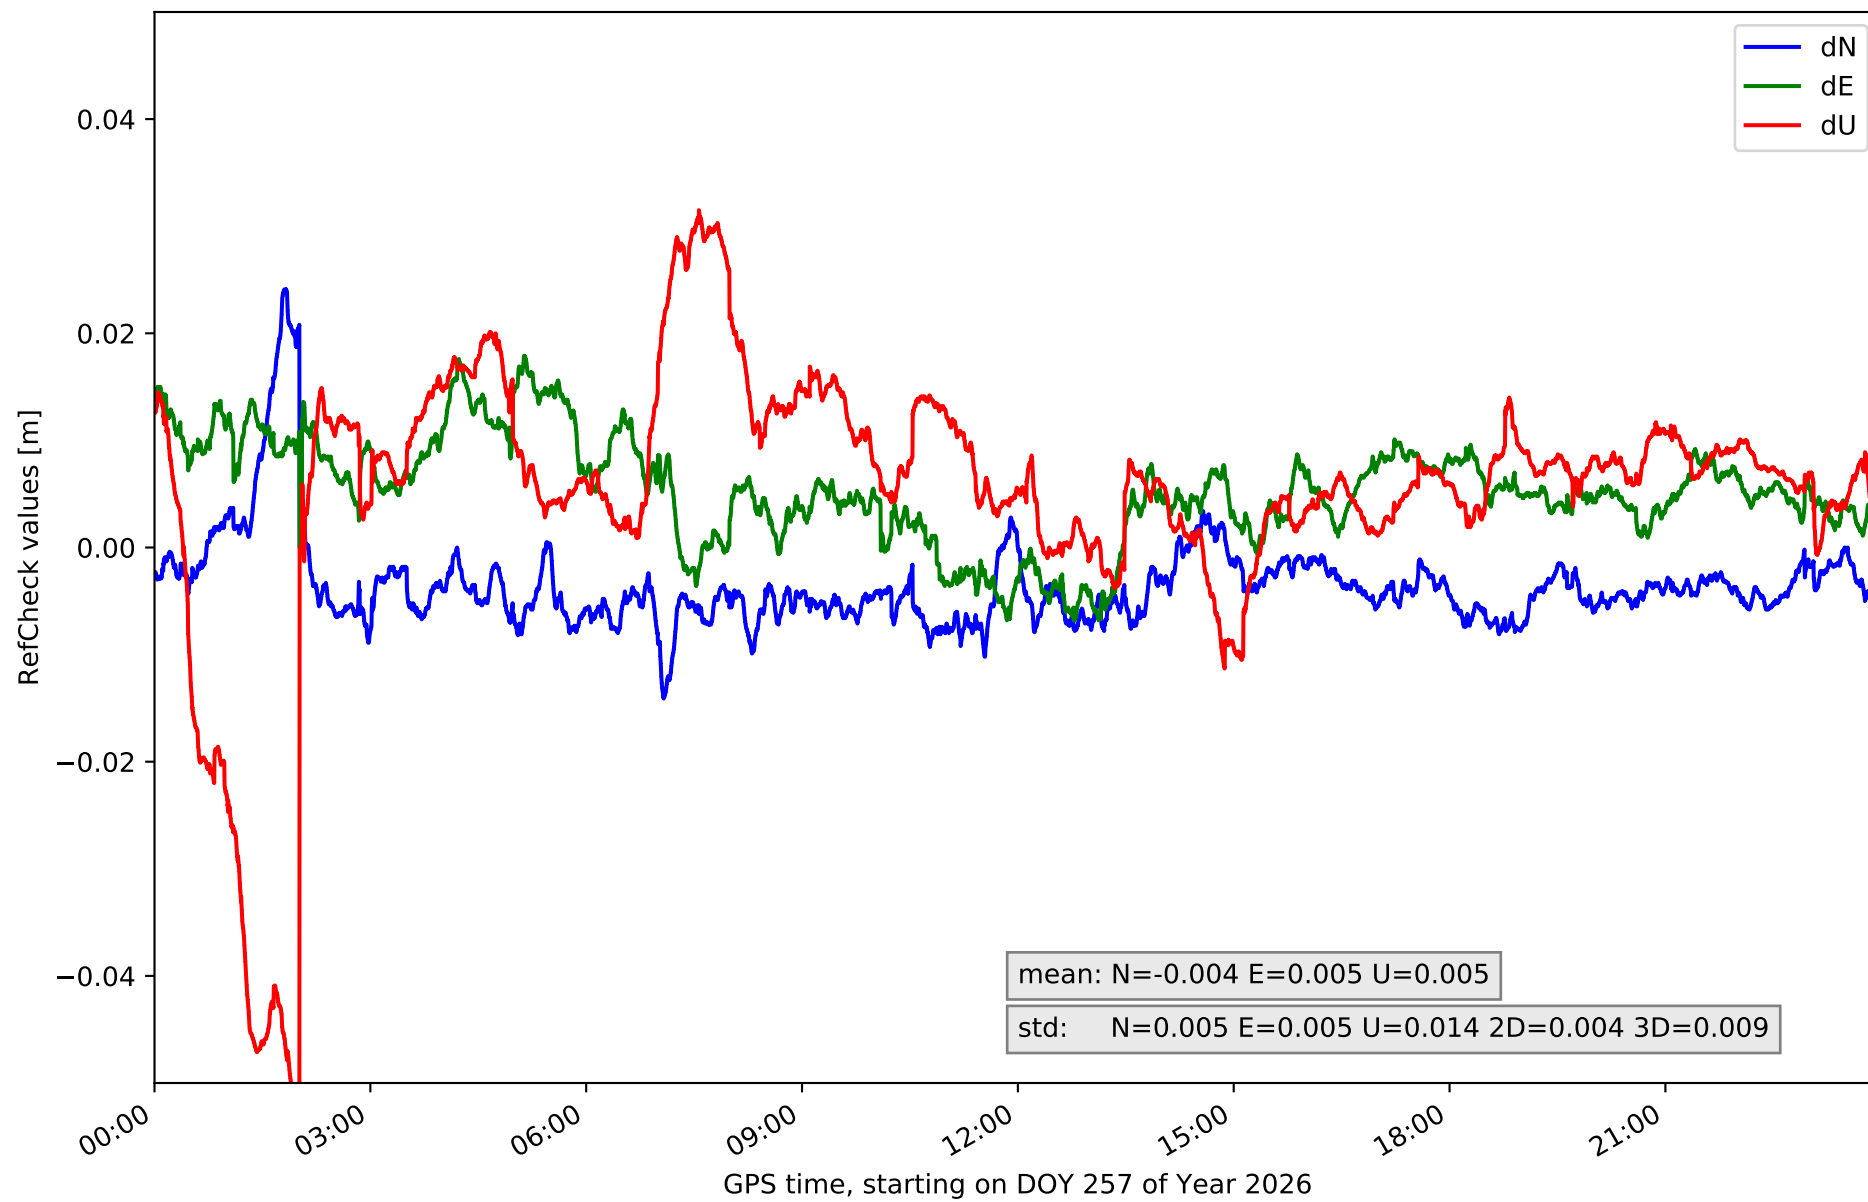


RefCheck for station LPAL in network N32T

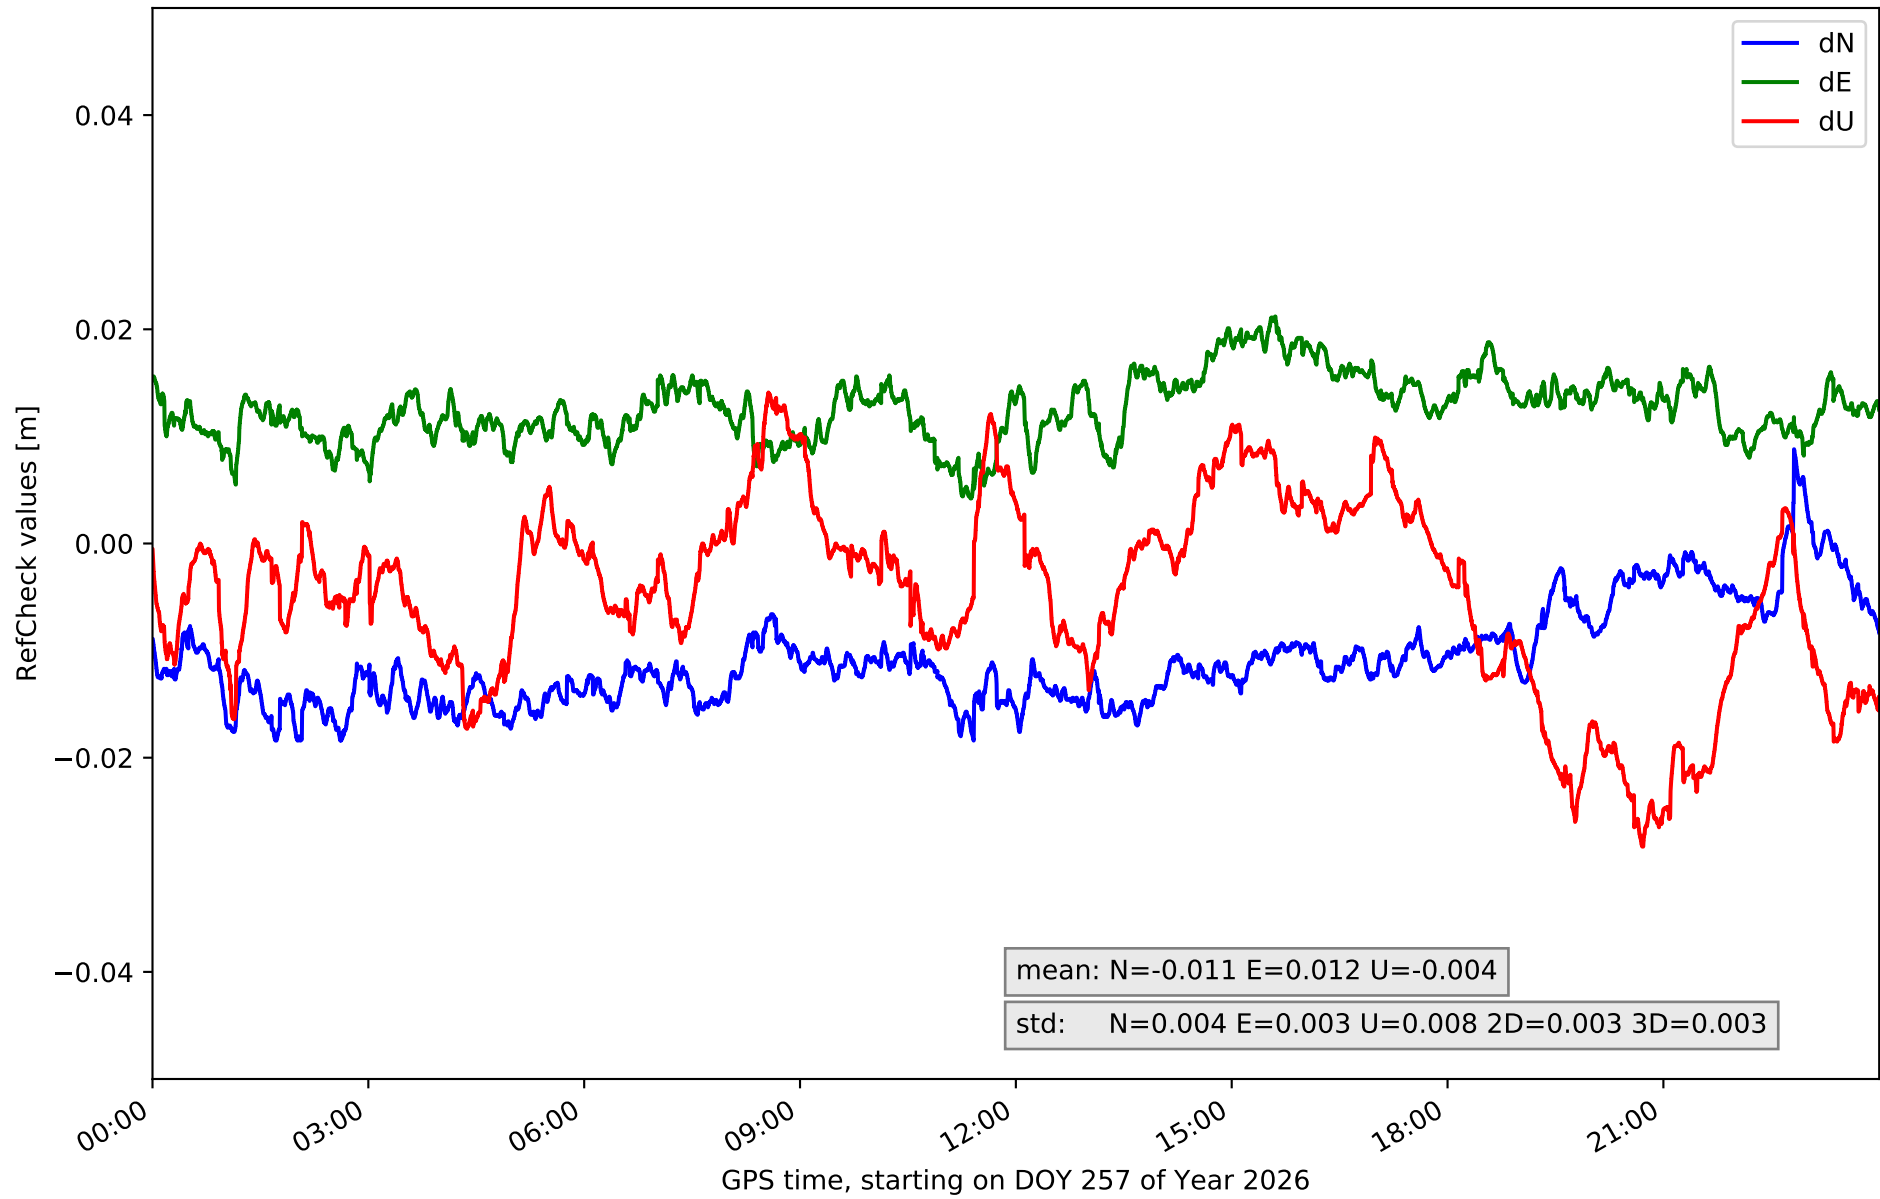


RefCheck for station LRES in network N32T

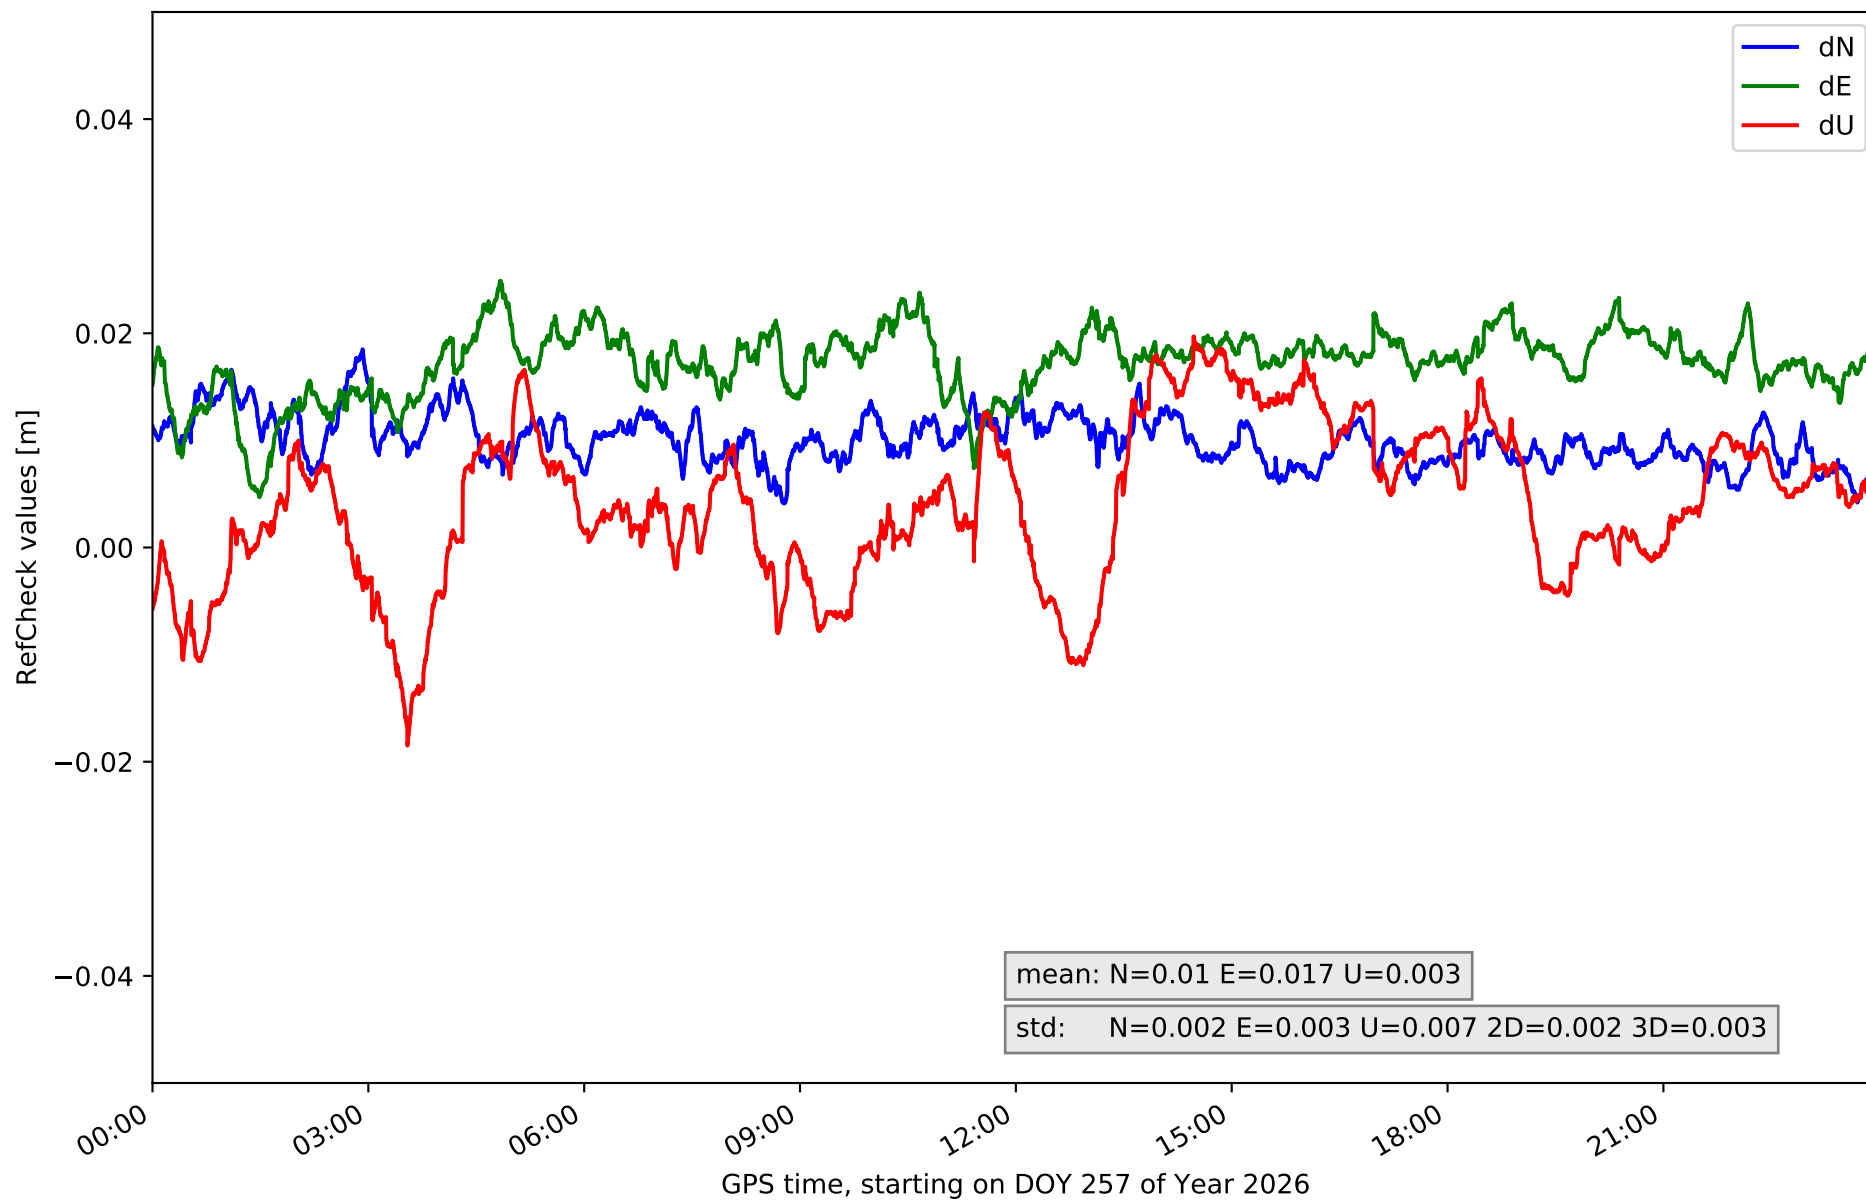


RefCheck for station TN01 in network N32T

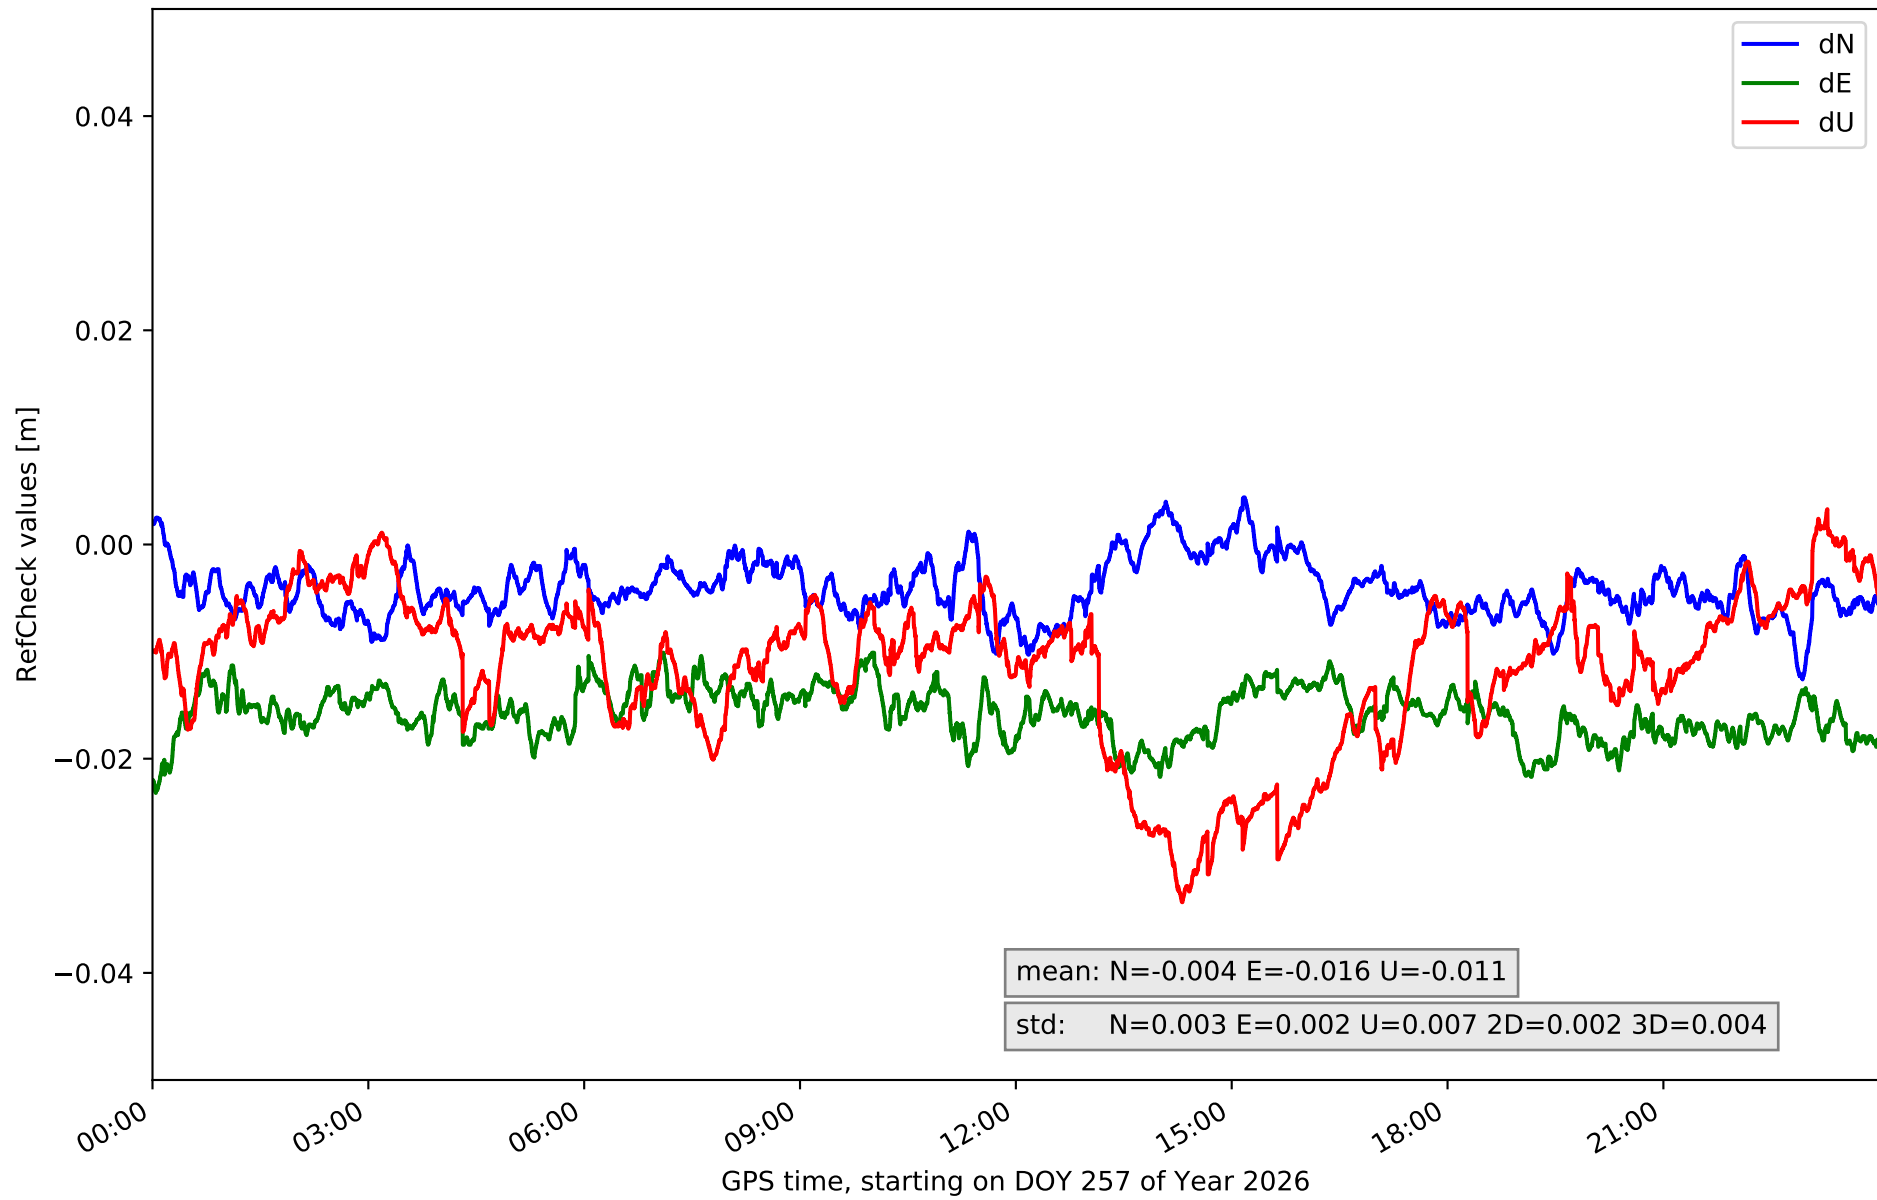


RefCheck for station TN02 in network N32T

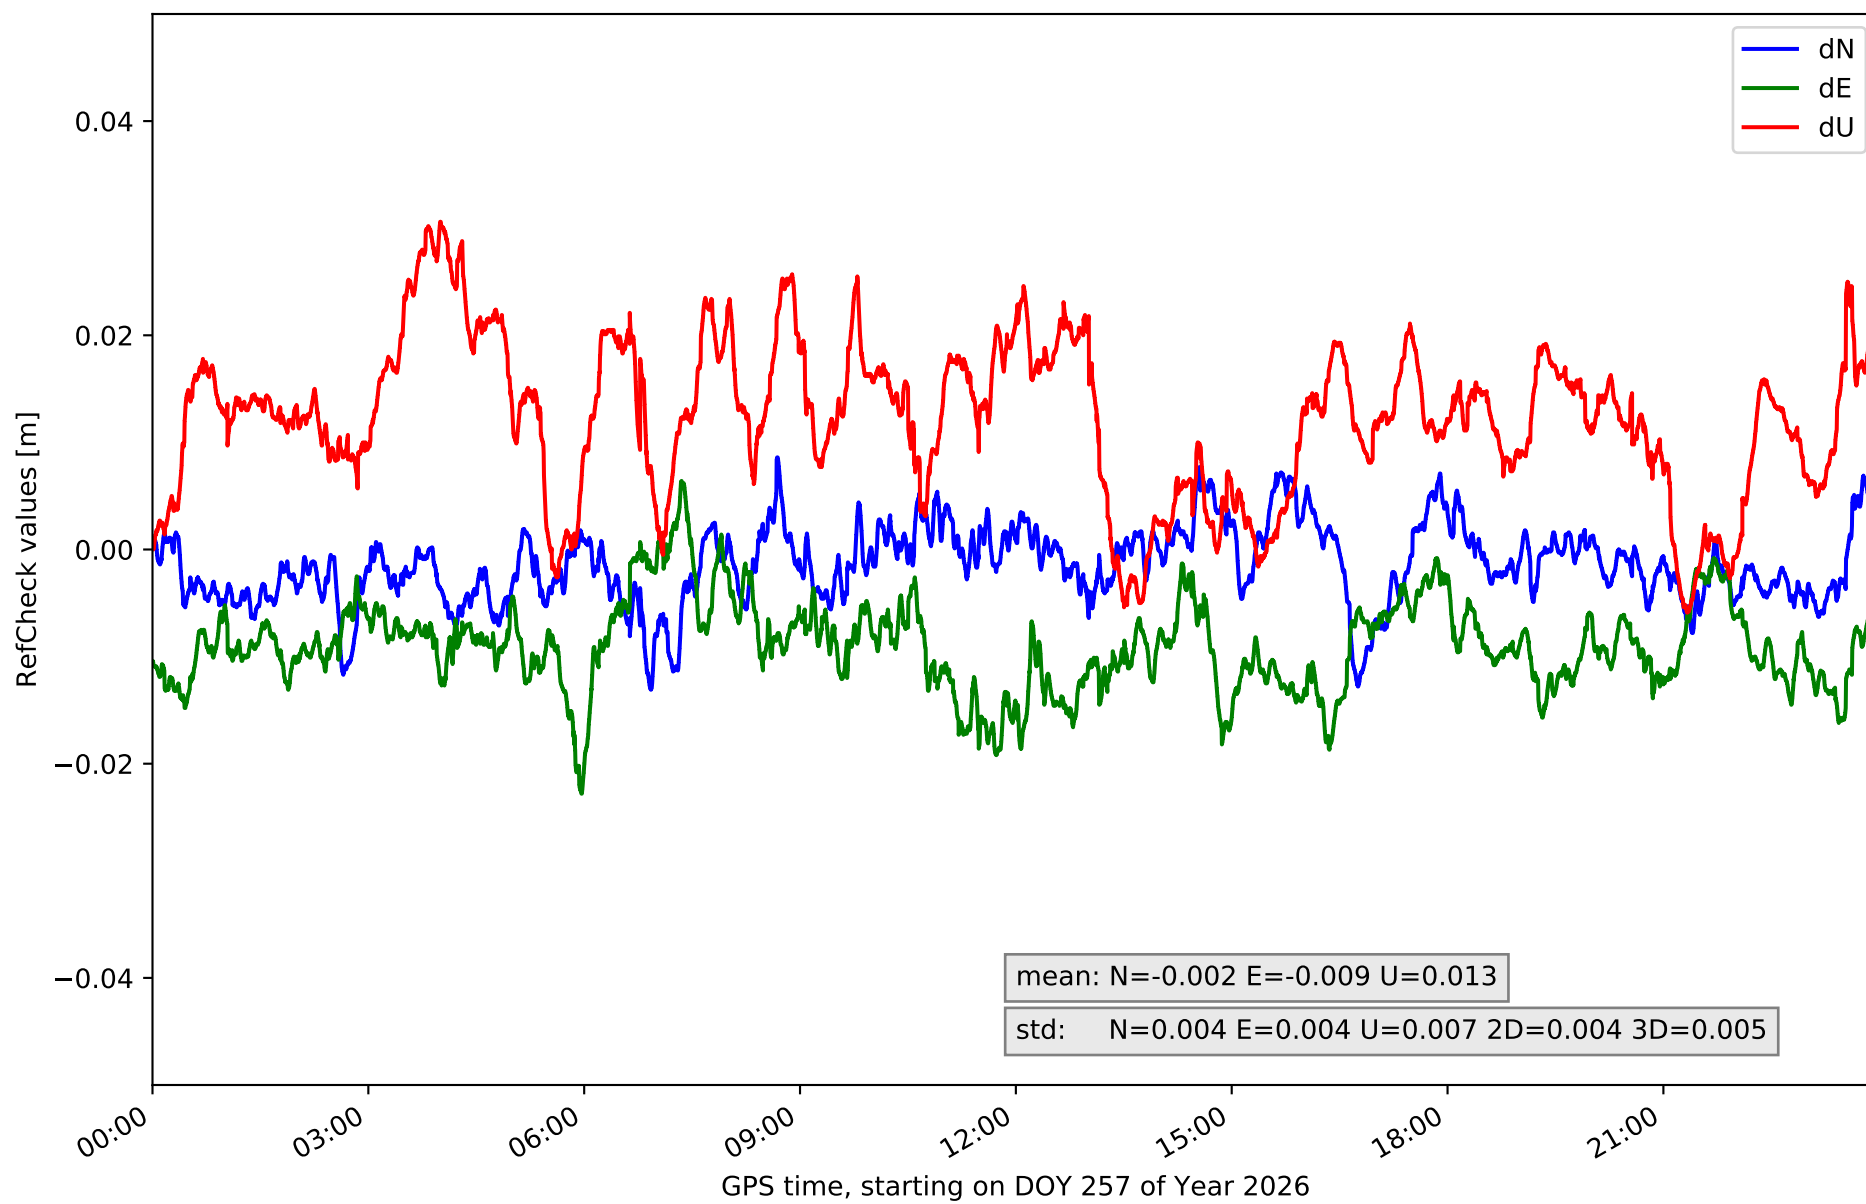


RefCheck for station TN03 in network N32T

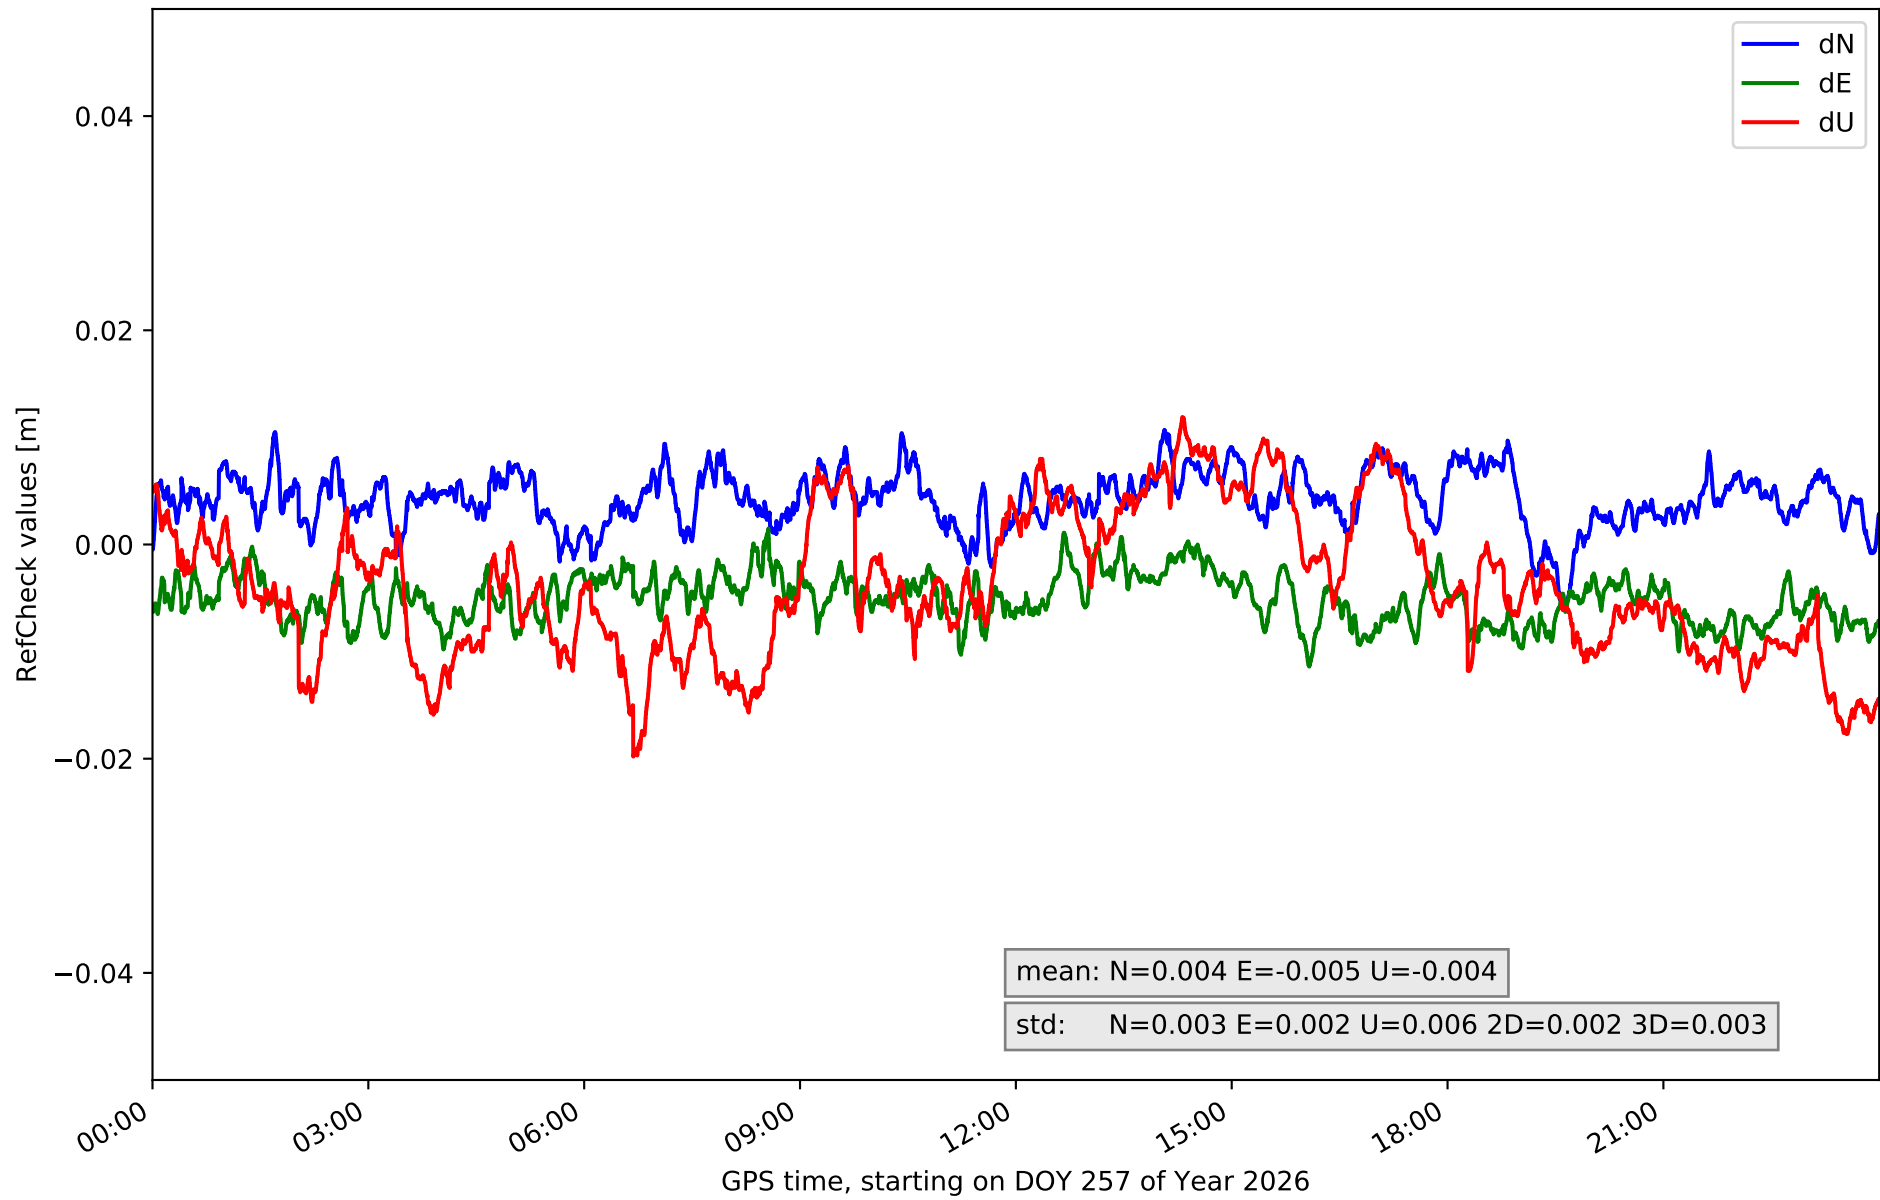


RefCheck for station TN06 in network N32T

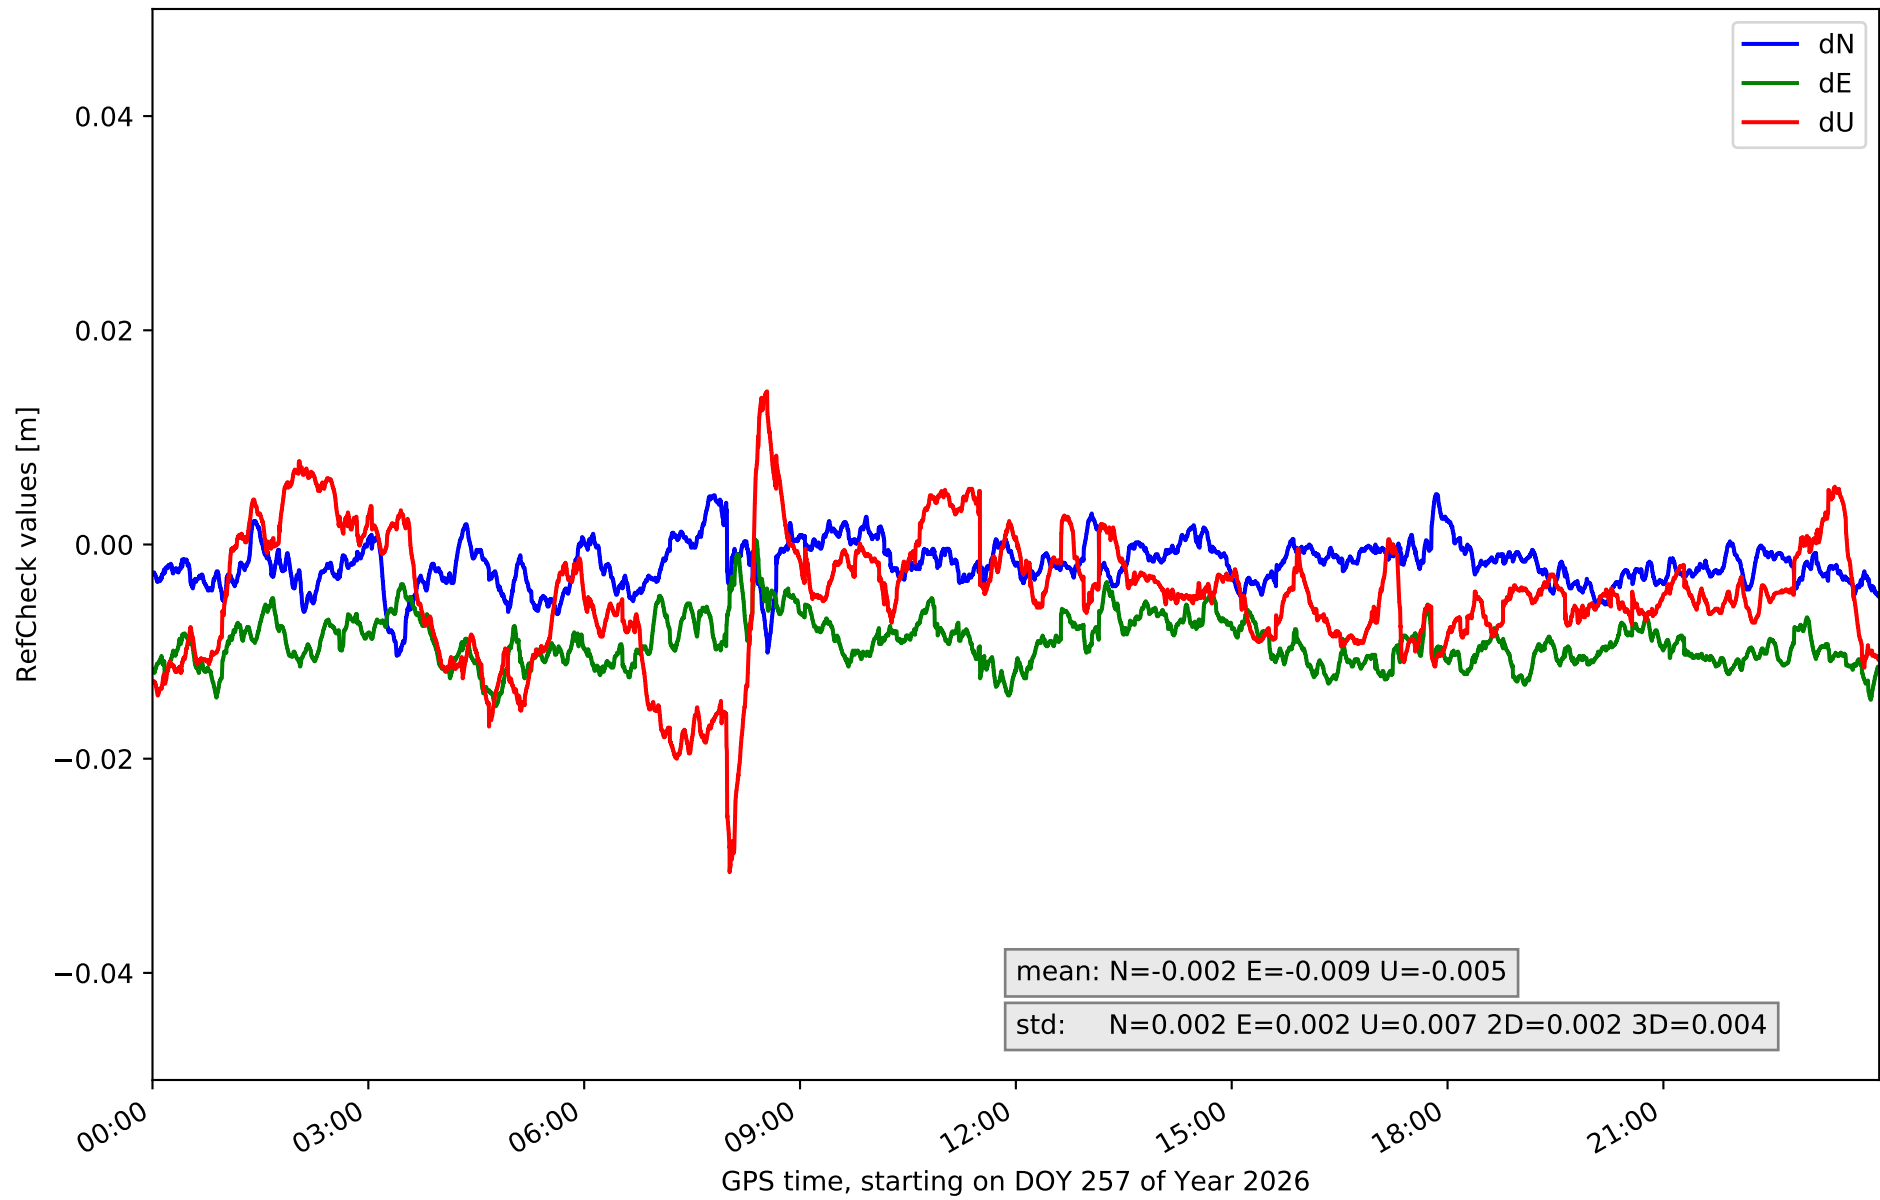

RefCheck for station TN09 in network N32T

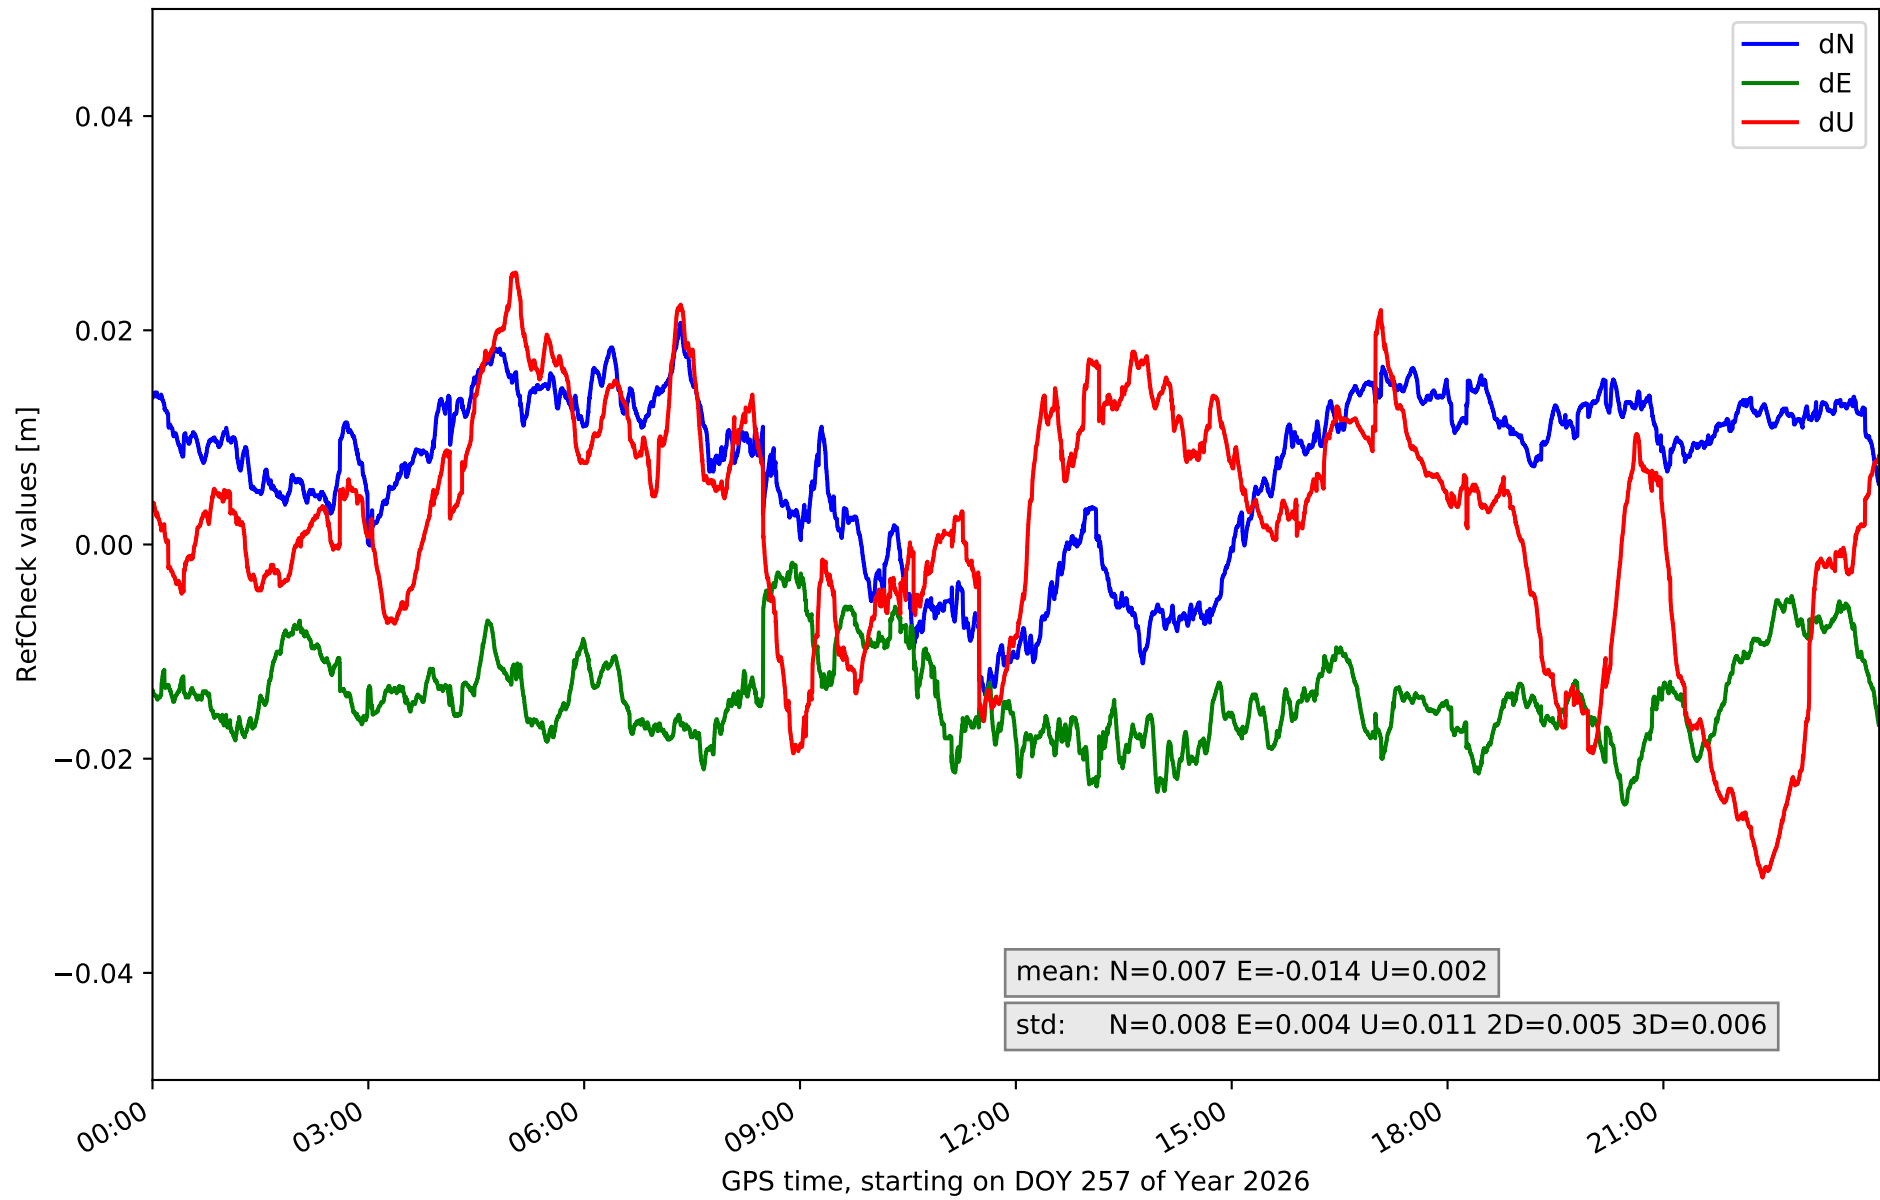

RefCheck for station TE11 in network N32T

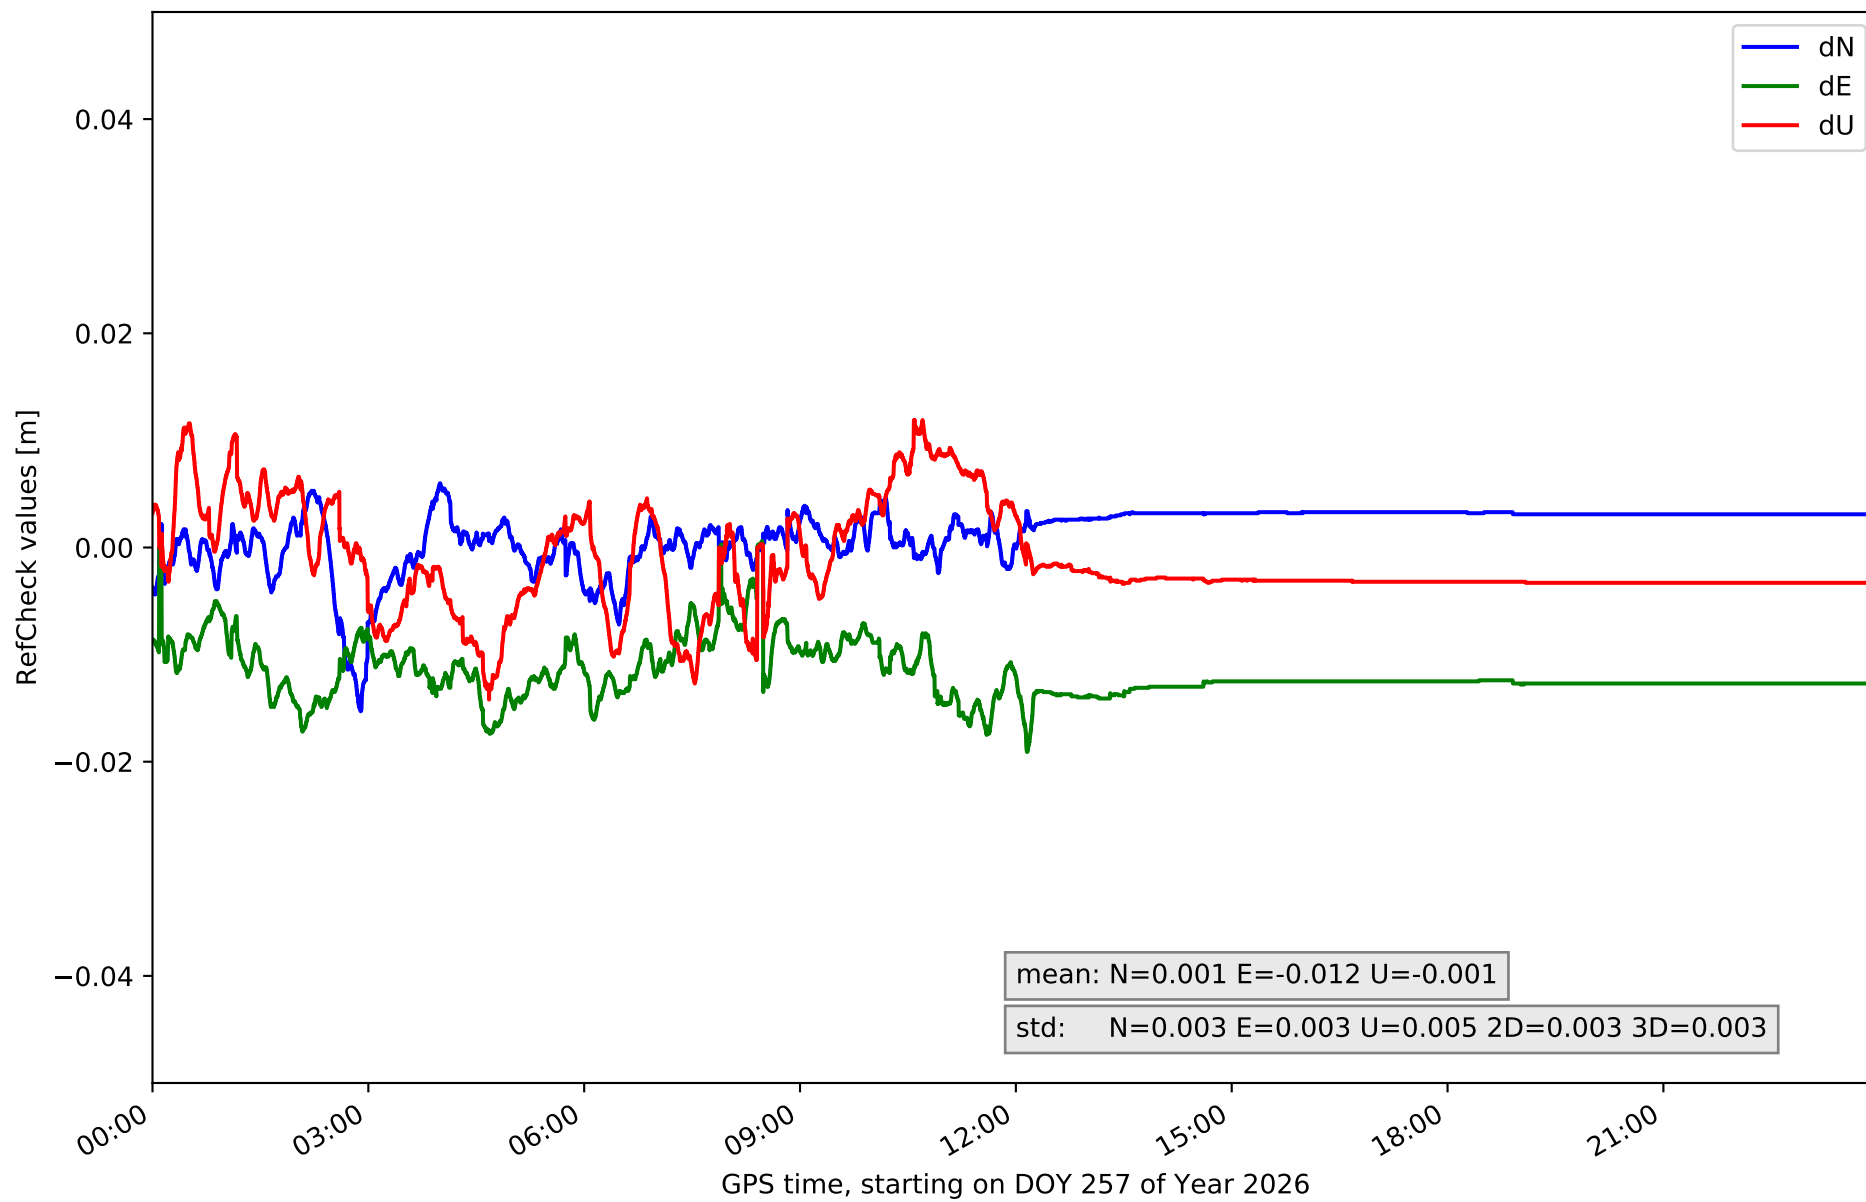

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.006	0.005	0.002	0.007	0.025	0.003	-0.01	0.02	0.005	0.003	0.004	59043	99.6	25850	43.6
EH02	-0.007	0.018	0.004	-0.0	0.029	0.005	-0.033	0.025	0.011	0.005	0.005	56606	95.5	43193	72.9
GOM1	-0.01	0.004	0.002	-0.021	-0.006	0.002	-0.03	0.009	0.007	0.002	0.004	57382	96.8	9100	15.4
GOME	-0.004	0.007	0.002	-0.007	0.004	0.002	-0.005	0.022	0.004	0.001	0.004	0	0.0	692	1.2
IZAN	-0.012	0.005	0.003	-0.019	0.0	0.002	-0.014	0.013	0.004	0.002	0.003	57093	96.3	1873	3.2
LP01	-0.02	-0.007	0.002	-0.002	0.012	0.003	0.0	0.028	0.006	0.002	0.004	58058	98.0	40880	69.0
LP03	-0.014	0.024	0.005	-0.007	0.018	0.005	-0.06	0.032	0.014	0.004	0.009	14790	25.0	10568	17.8
LPAL	-0.018	0.009	0.004	0.004	0.021	0.003	-0.028	0.014	0.008	0.003	0.003	58959	99.5	21266	35.9
LRES	0.004	0.018	0.002	0.005	0.025	0.003	-0.018	0.02	0.007	0.002	0.003	59256	100.0	41753	70.5
TN01	-0.013	0.004	0.003	-0.023	-0.01	0.002	-0.033	0.003	0.007	0.002	0.004	59256	100.0	24943	42.1
TN02	-0.013	0.009	0.004	-0.023	0.006	0.004	-0.006	0.031	0.007	0.004	0.005	28873	48.7	15639	26.4
TN03	-0.006	0.011	0.003	-0.011	0.002	0.002	-0.02	0.012	0.006	0.002	0.003	4829	8.1	188	0.3
TN06	-0.01	0.005	0.002	-0.015	0.001	0.002	-0.031	0.014	0.007	0.002	0.004	26849	45.3	1654	2.8
TN09	-0.014	0.021	0.008	-0.024	-0.002	0.004	-0.031	0.025	0.011	0.005	0.006	52694	88.9	29321	49.5
TE11	-0.015	0.006	0.003	-0.019	0.001	0.003	-0.014	0.012	0.005	0.003	0.003	45093	76.1	424	0.7
Mean	-0.011	0.009	0.003	-0.01	0.008	0.003	-0.022	0.019	0.007	0.003	0.004	42585.4	71.9	17822.9	30.1
Min/Max	-0.02	0.024	0.008	-0.024	0.029	0.005	-0.06	0.032	0.014	0.005	0.009	59256	100.0	43193	72.9

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	94.4	95.0	93.0	94.3	94.2
considering satellites with dual-frequency fixed	92.9	93.3	91.3	93.2	93.0
considering all signals separately	93.1	93.5	91.3	93.5	92.8