

summary for network NT32

timeperiod chosen: from 2026-09-14-00:00:00 until 2026-09-14-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.4 seconds


average fixing percentage with threshold set to 0.3: 94.7 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

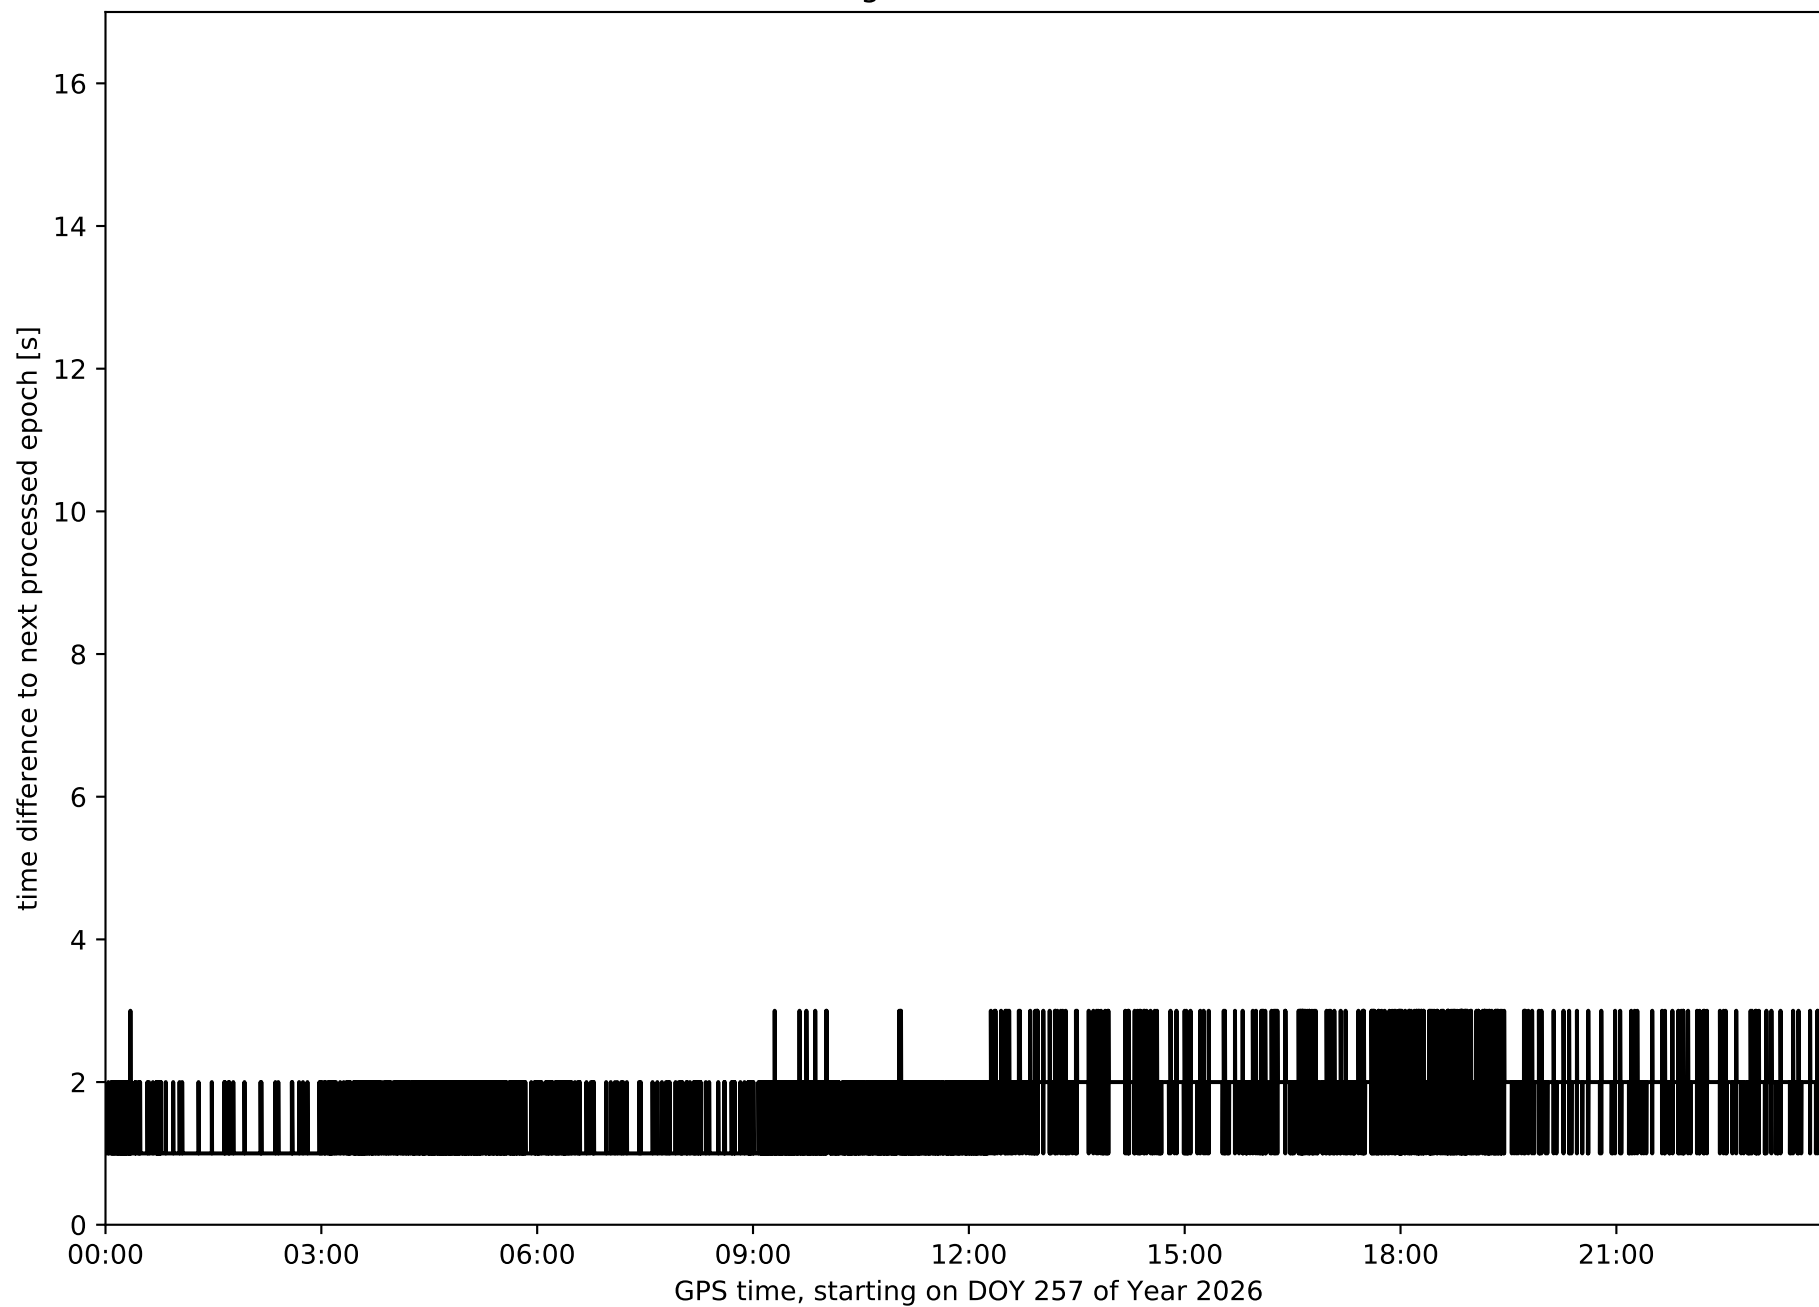


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

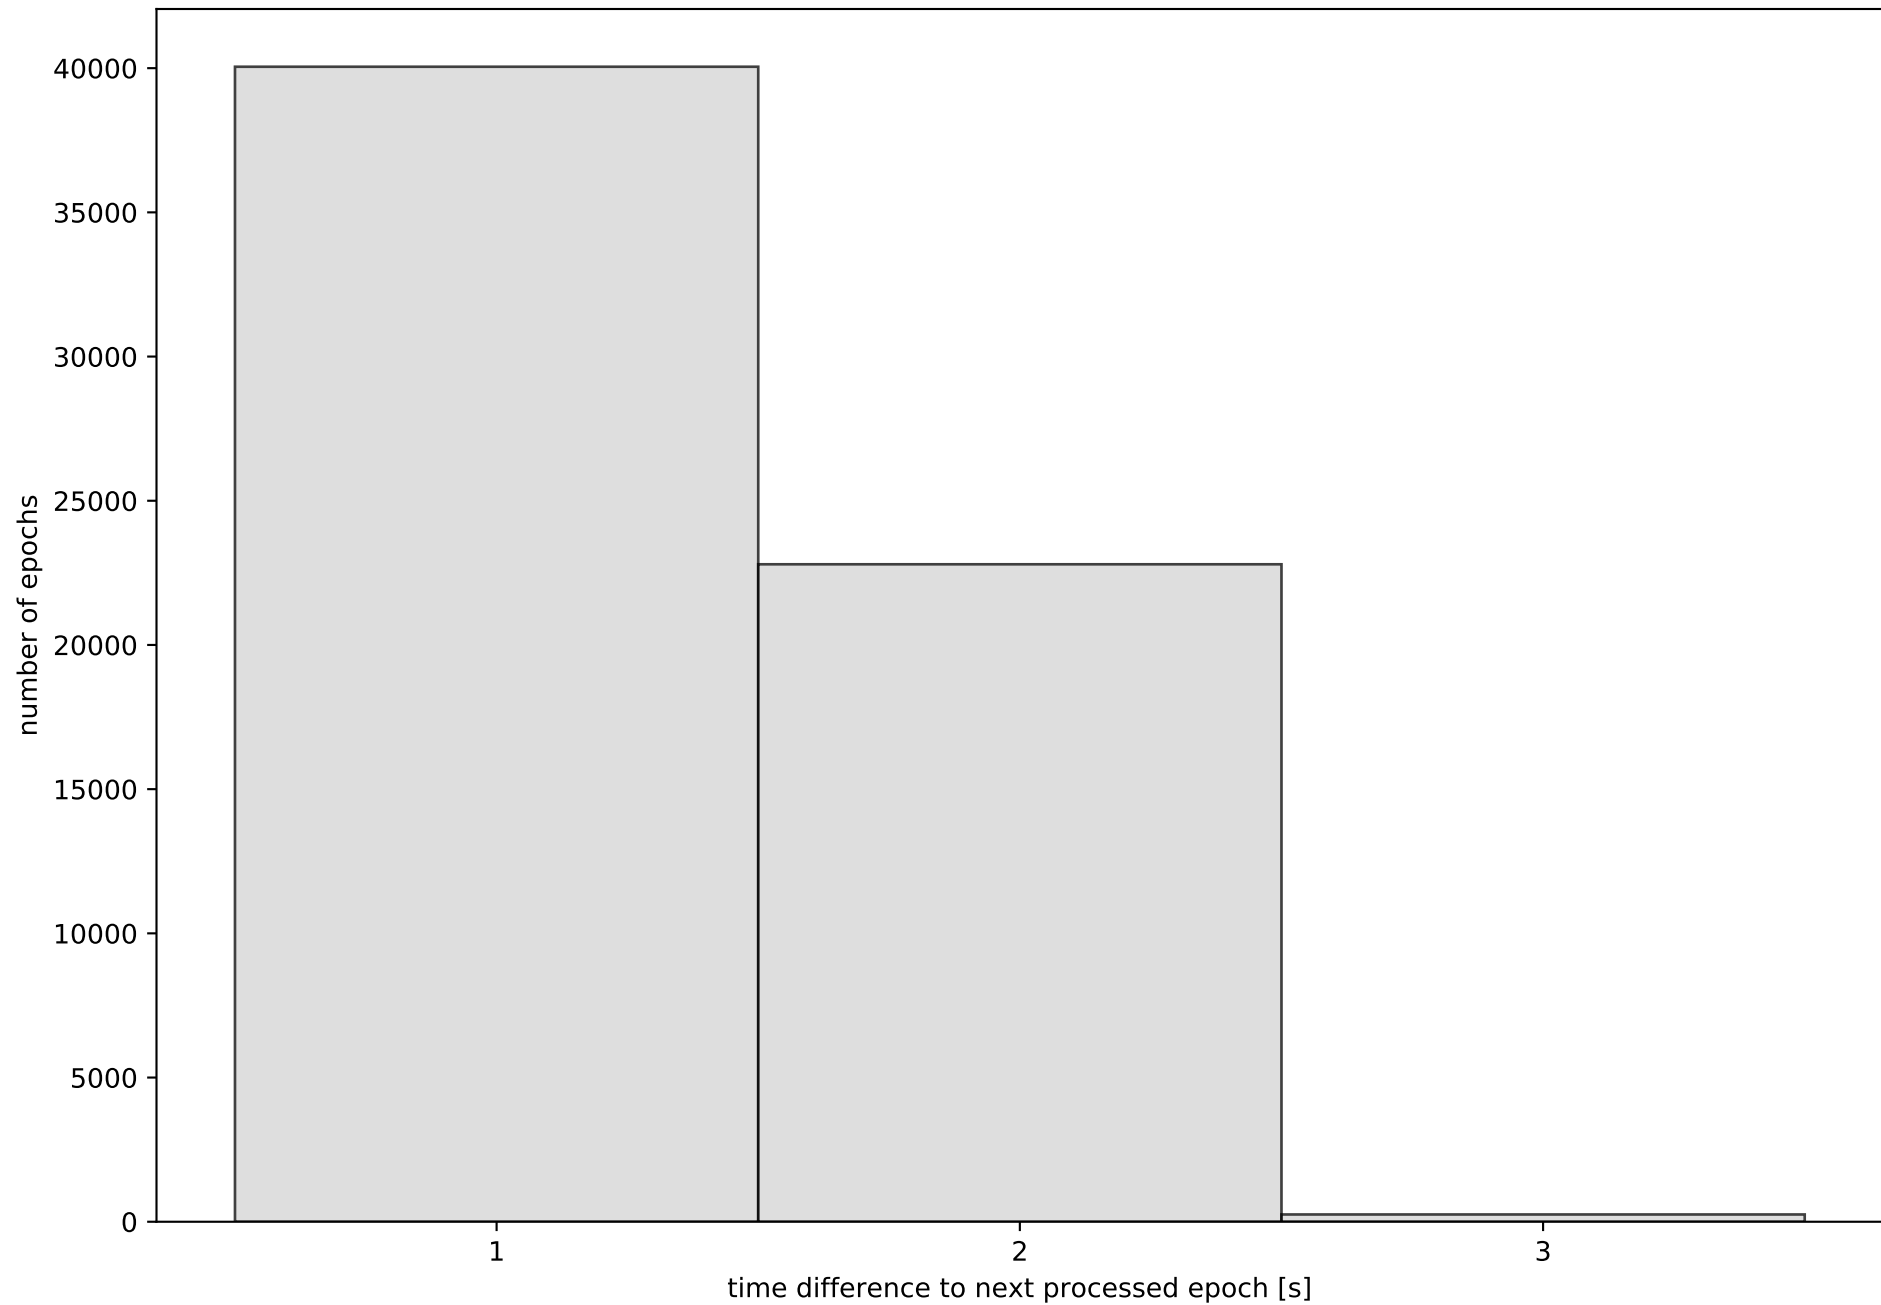


Network NT32 with threshold set to 0.3

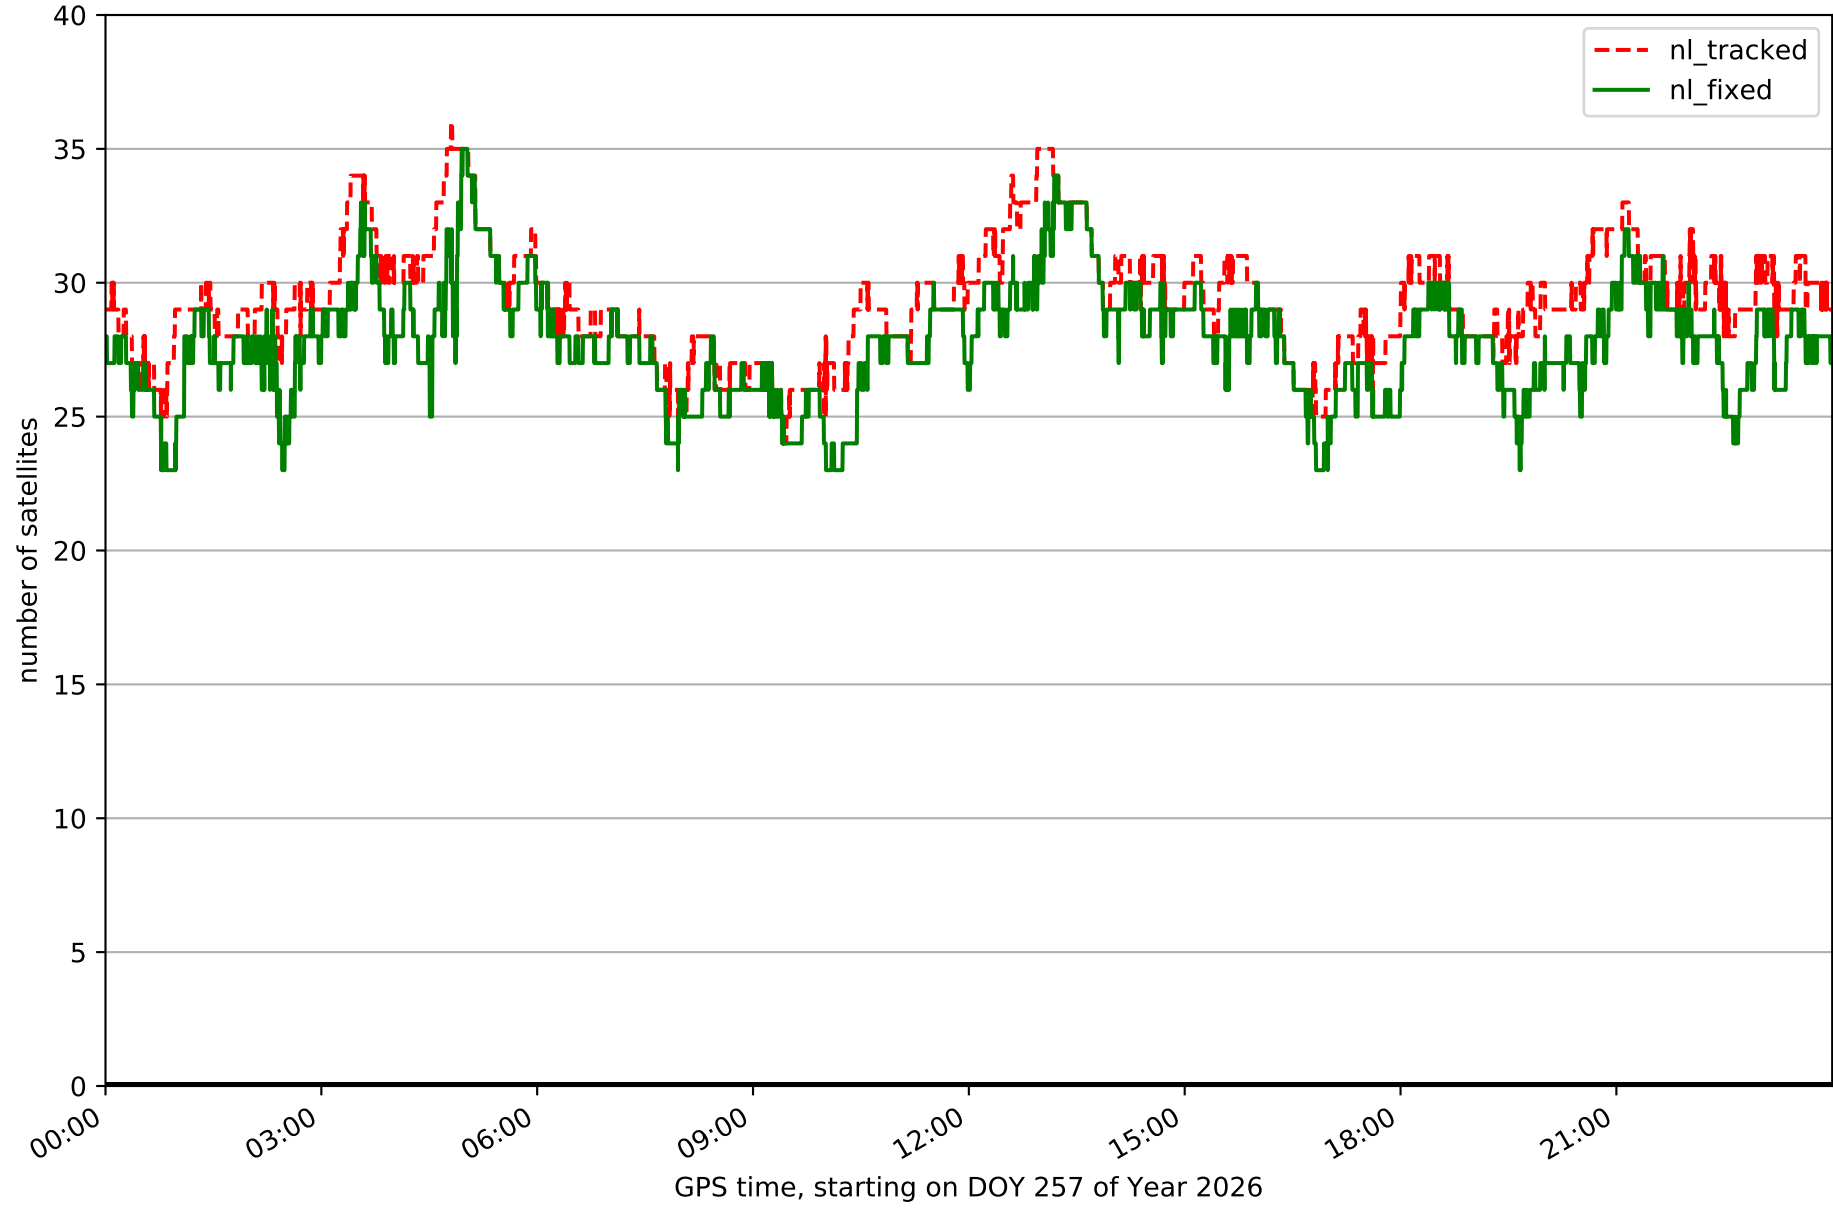


Fixing percentage of satellites in network NT32 with threshold set to 0.3

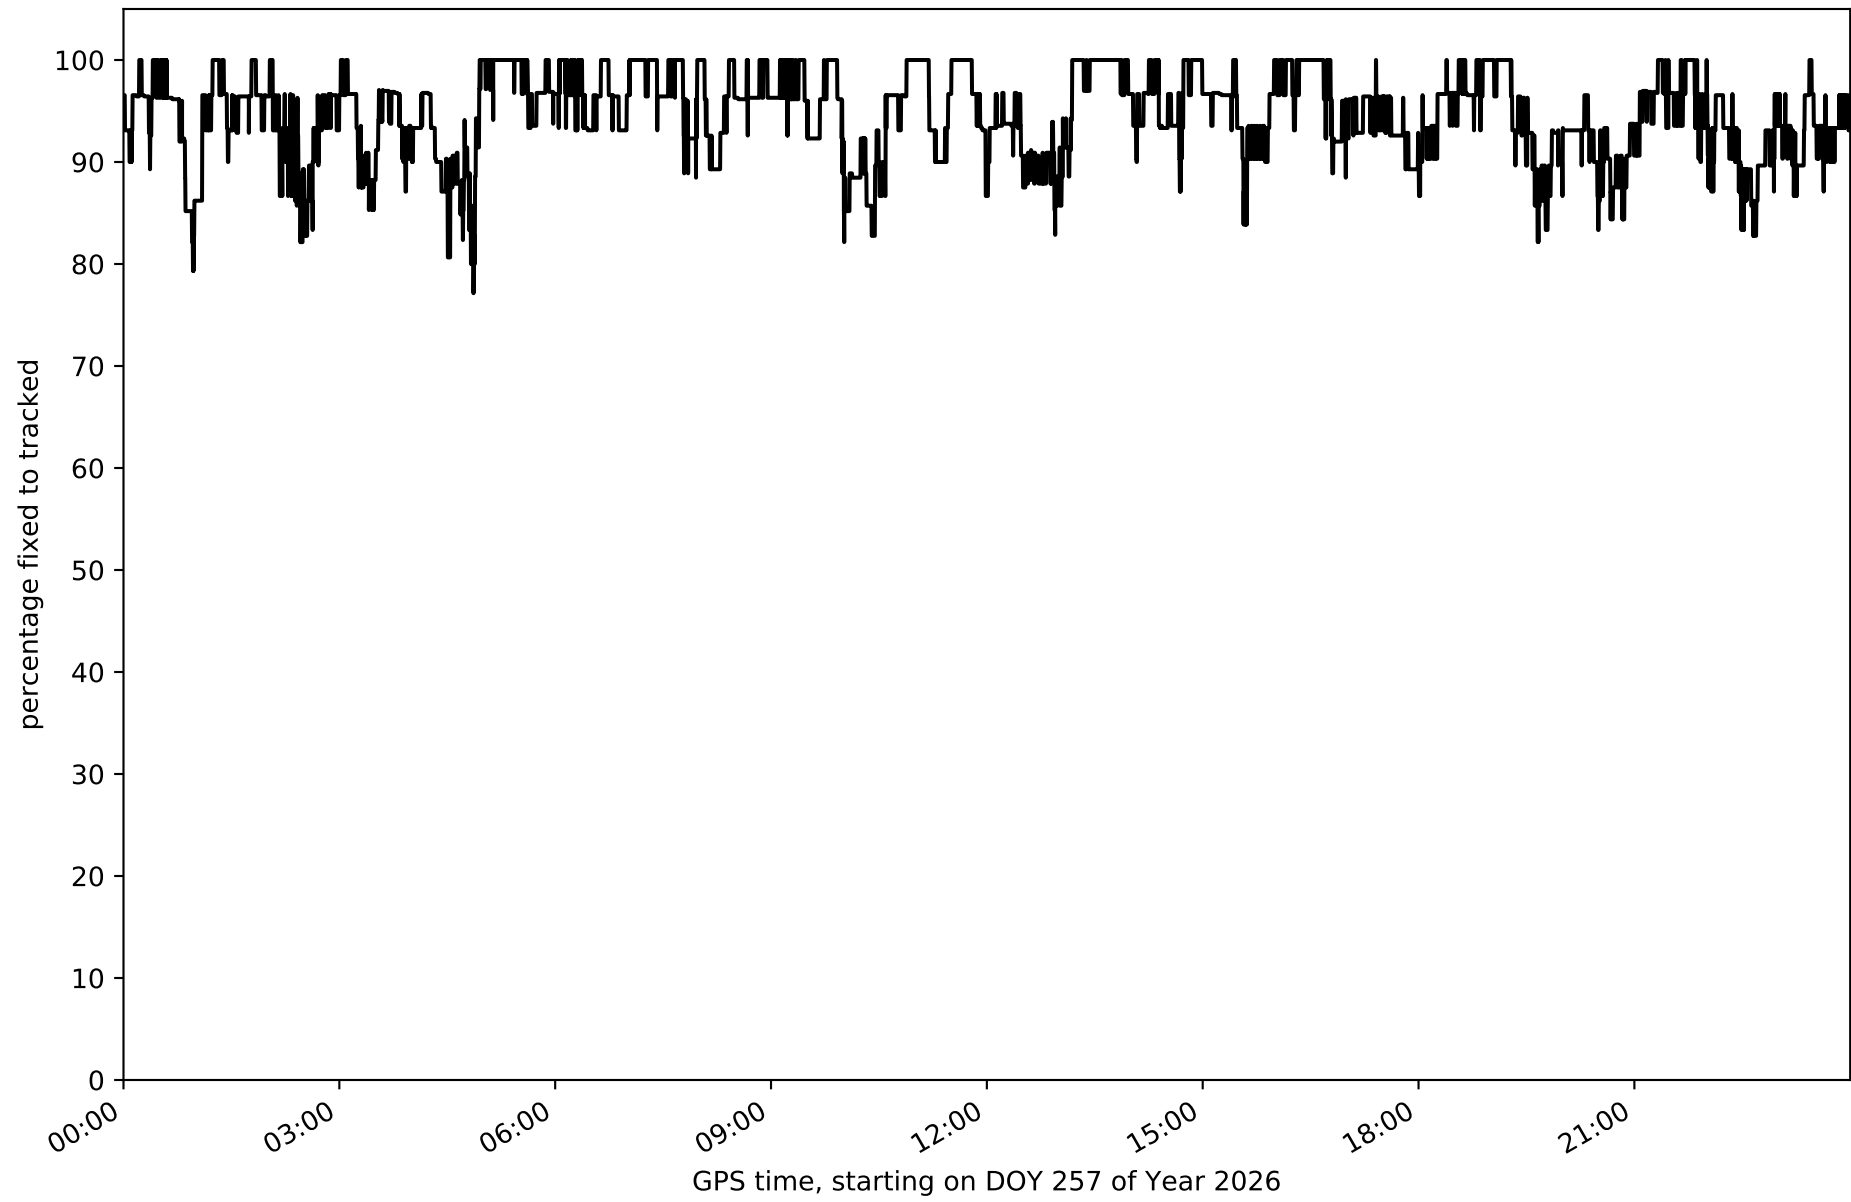


Network NT32 - only GPS with threshold set to 0.3

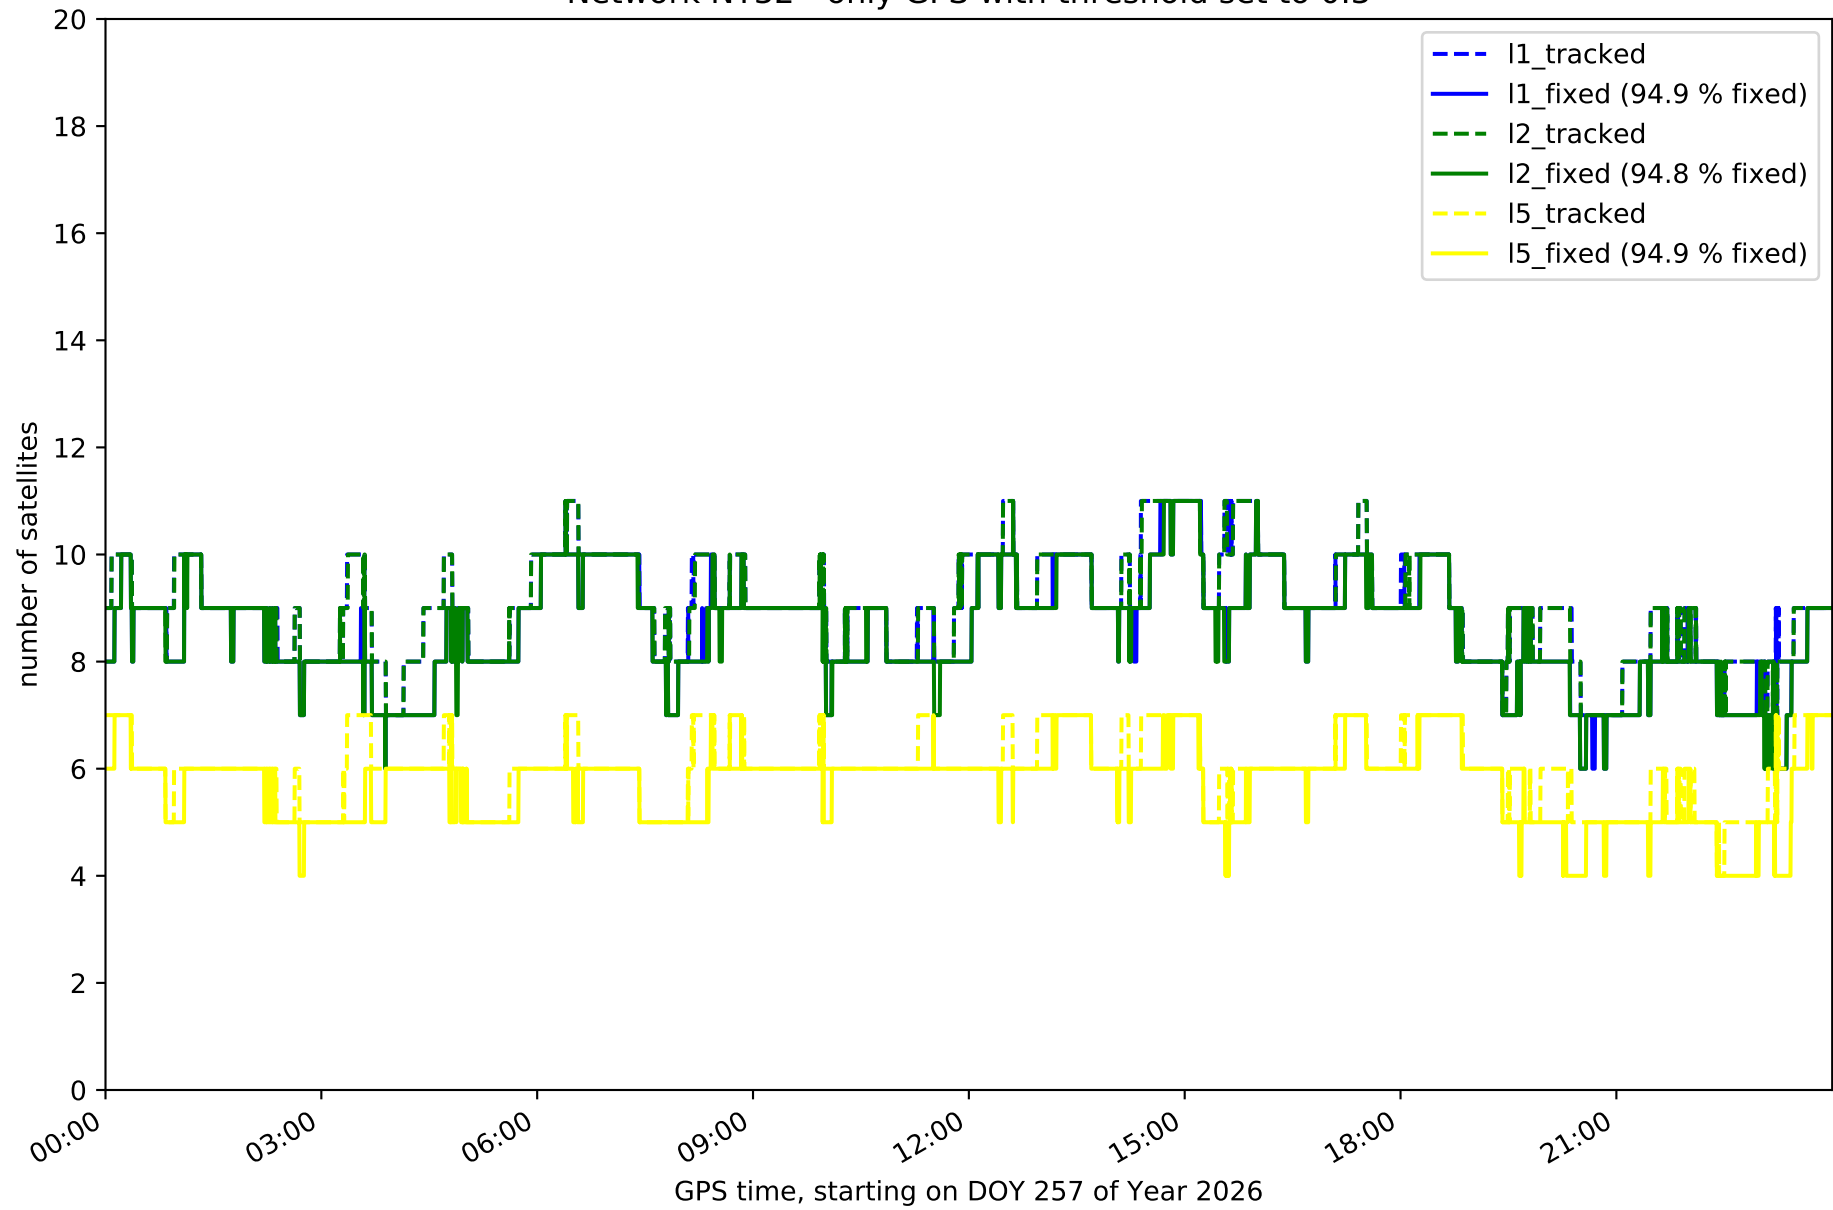


Network NT32 - only GLONASS with threshold set to 0.3

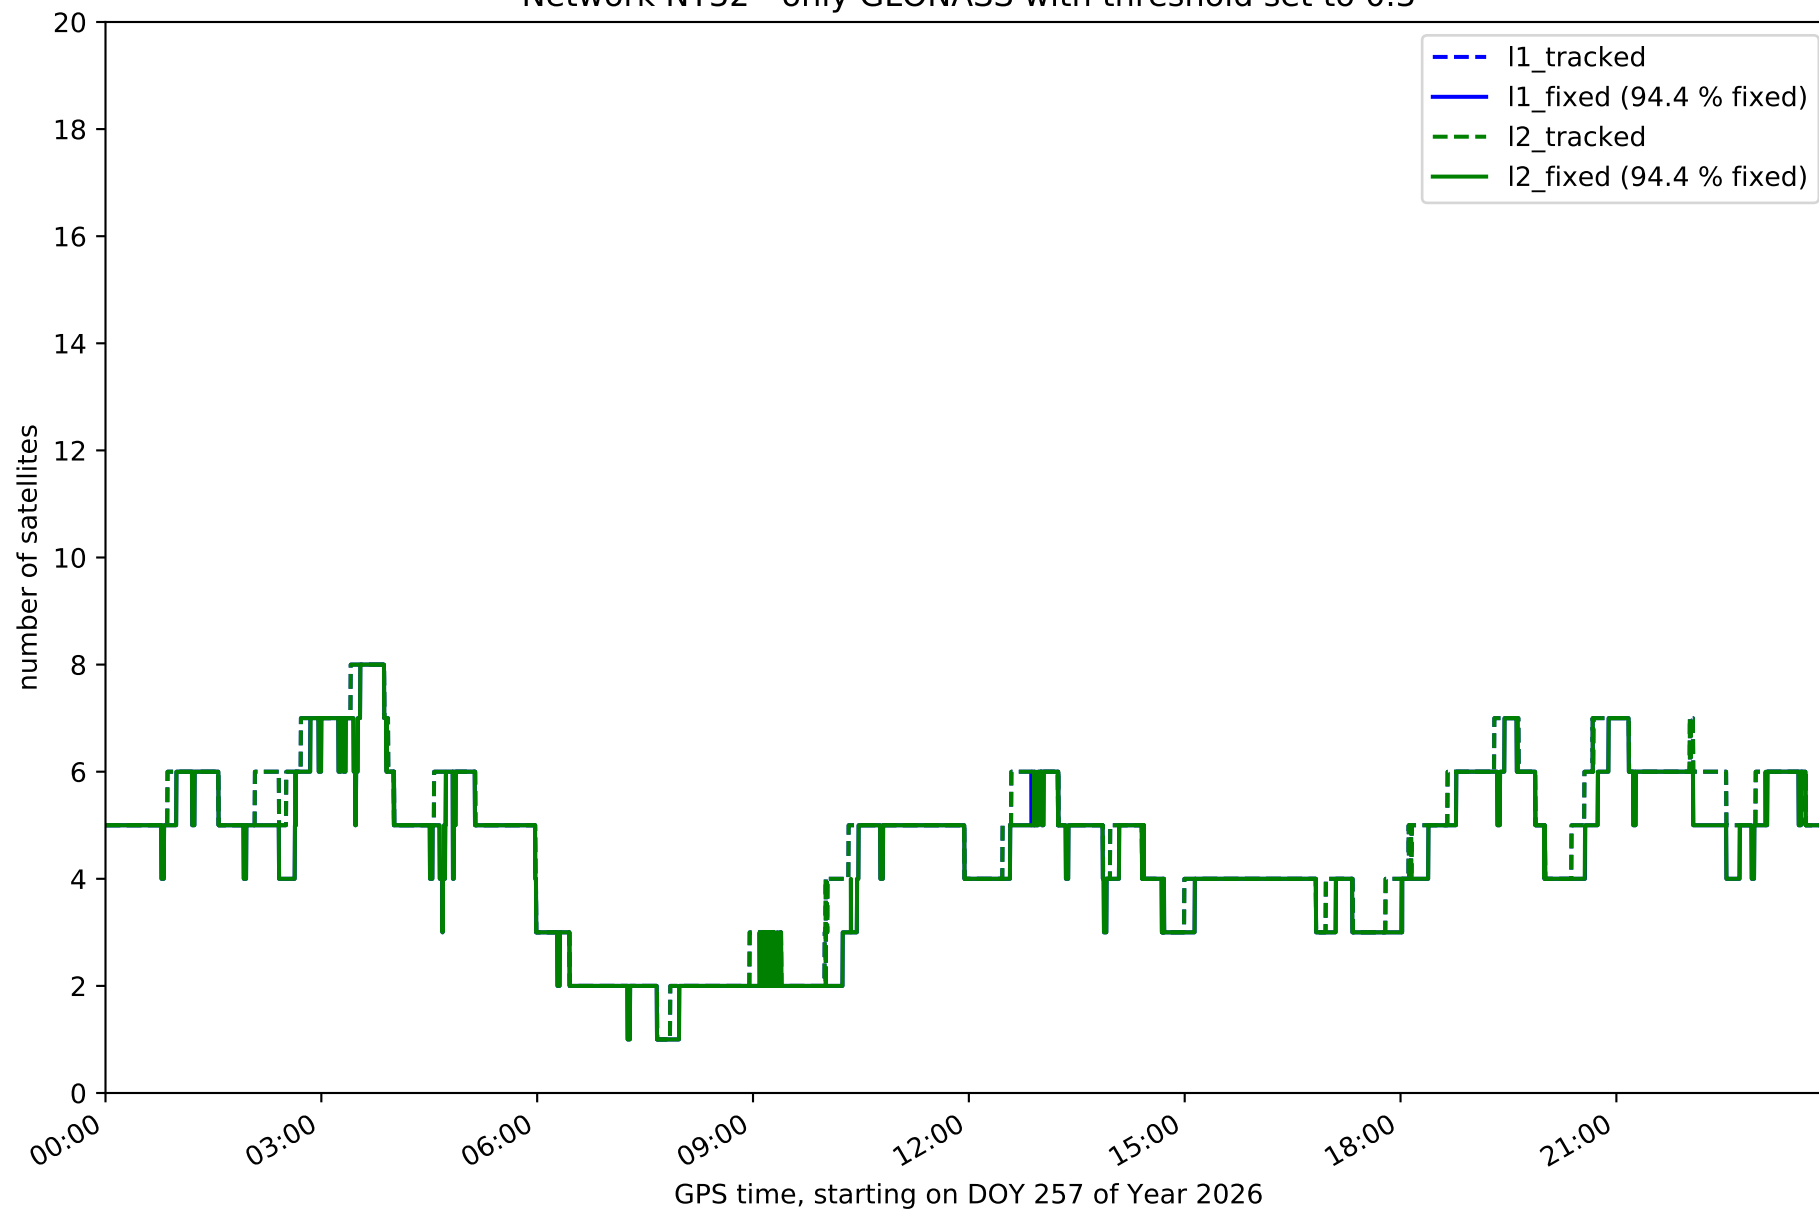


Network NT32 - only BDS with threshold set to 0.3

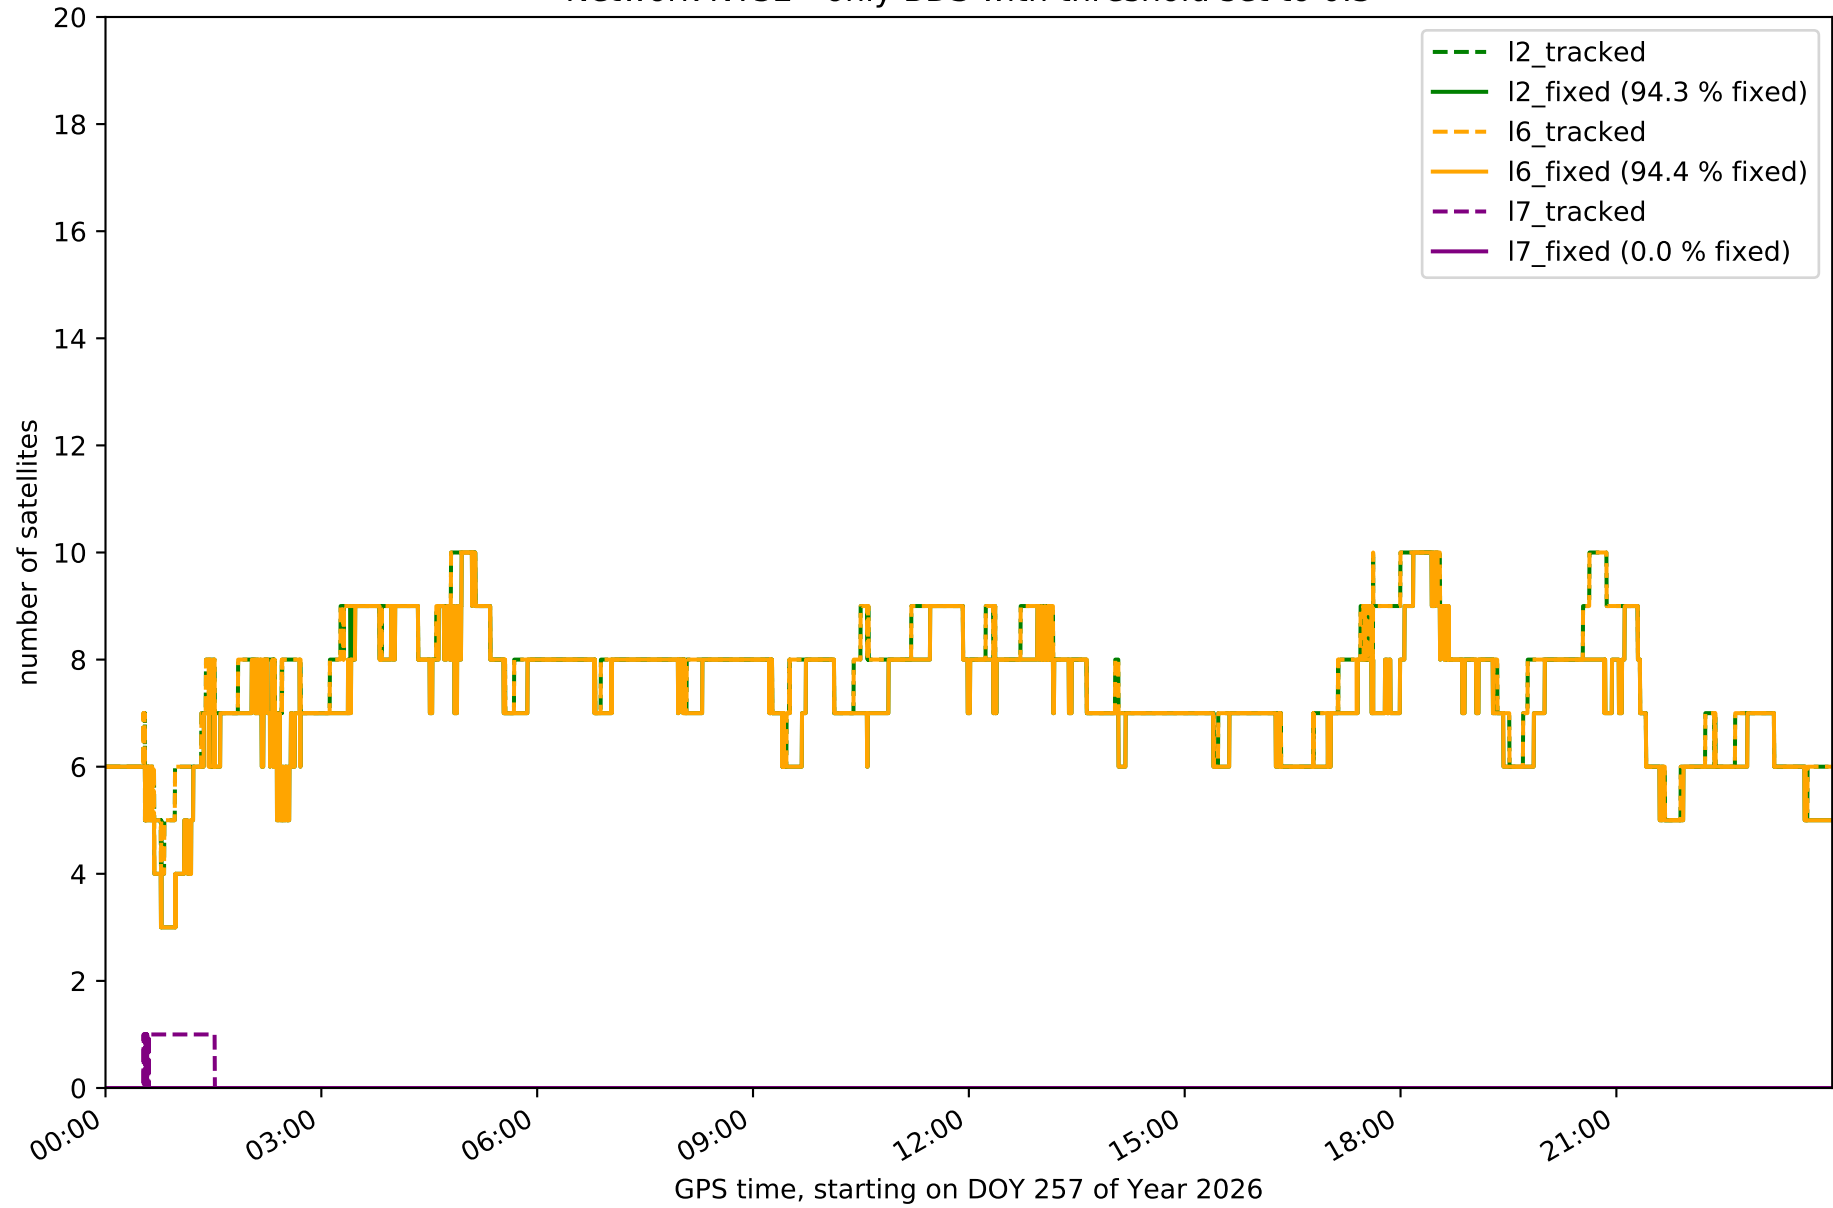


Network NT32 - only Galileo with threshold set to 0.3

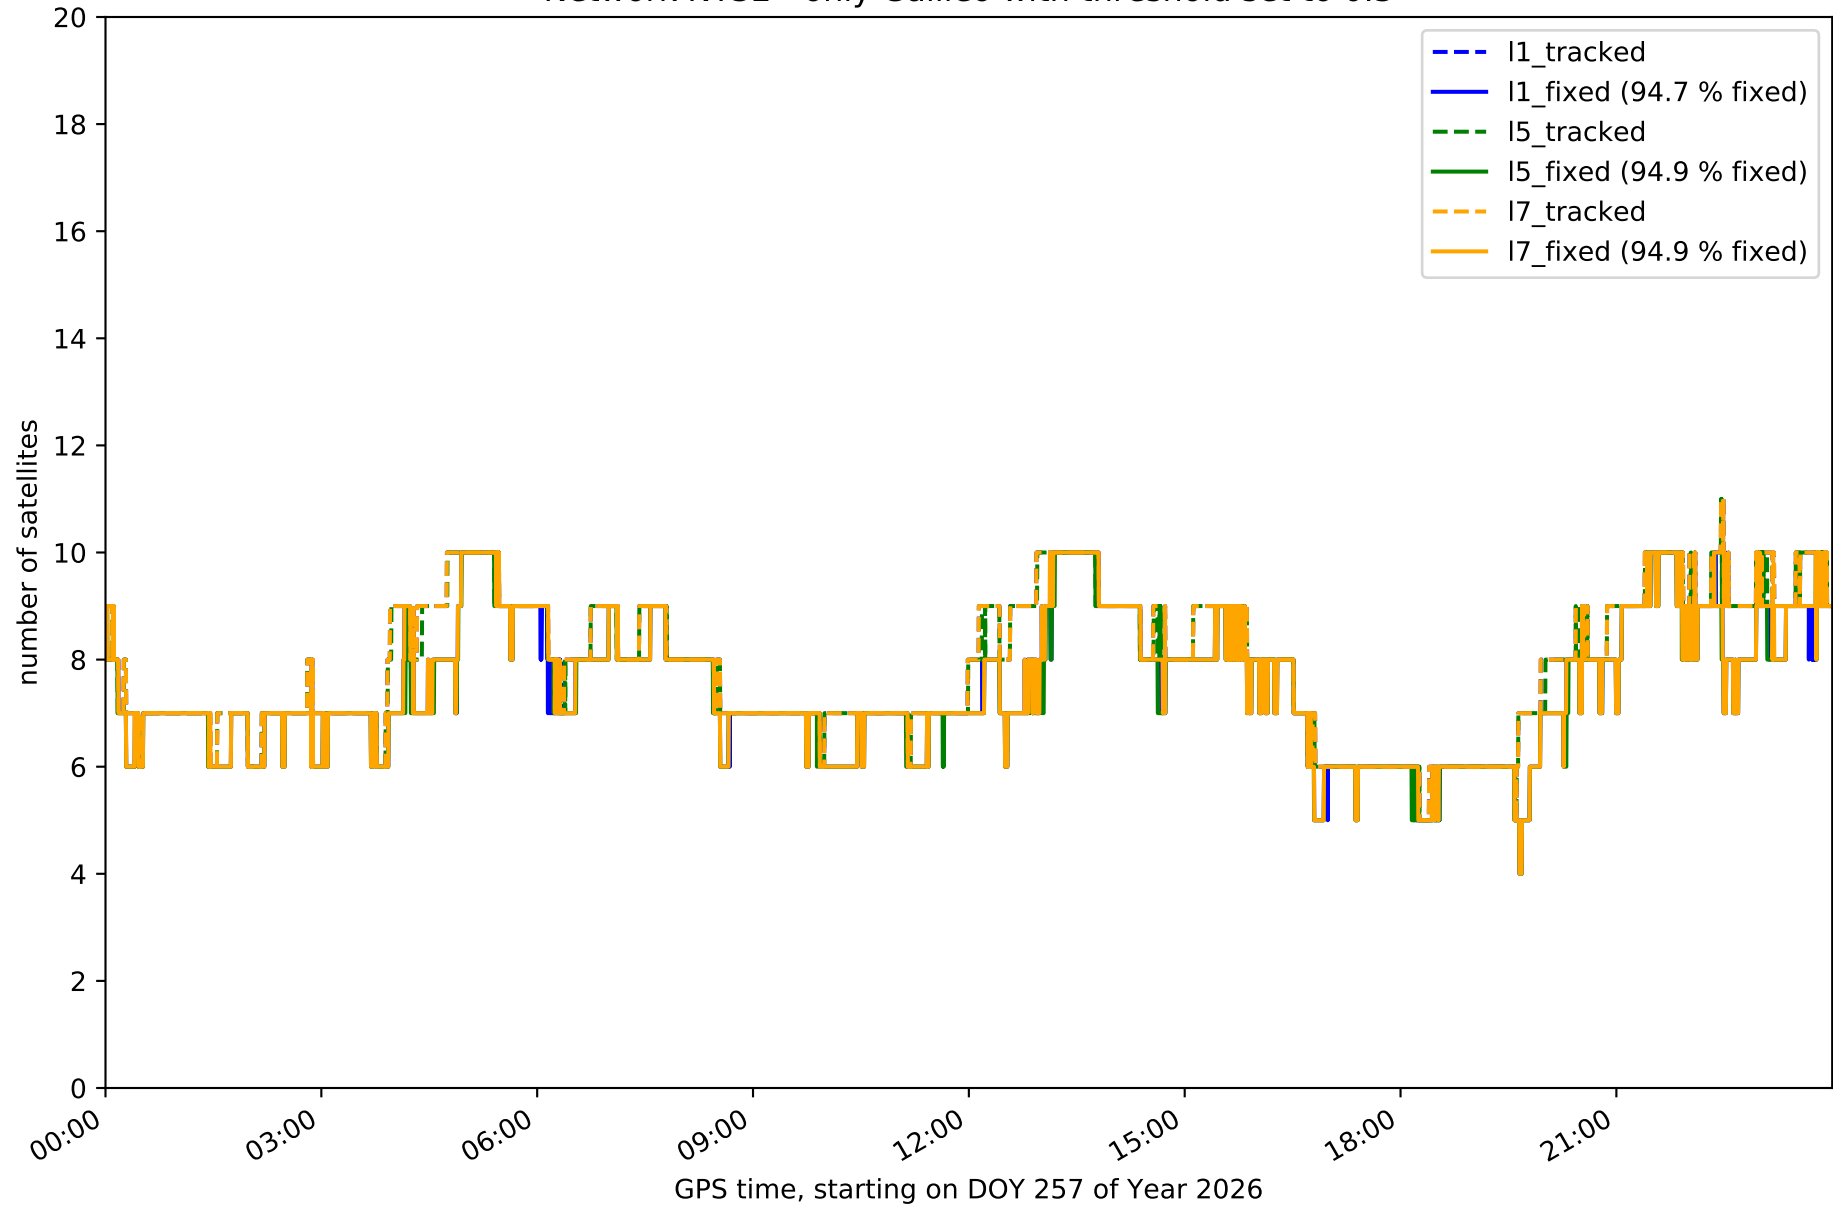


Station EH01 in network NT32

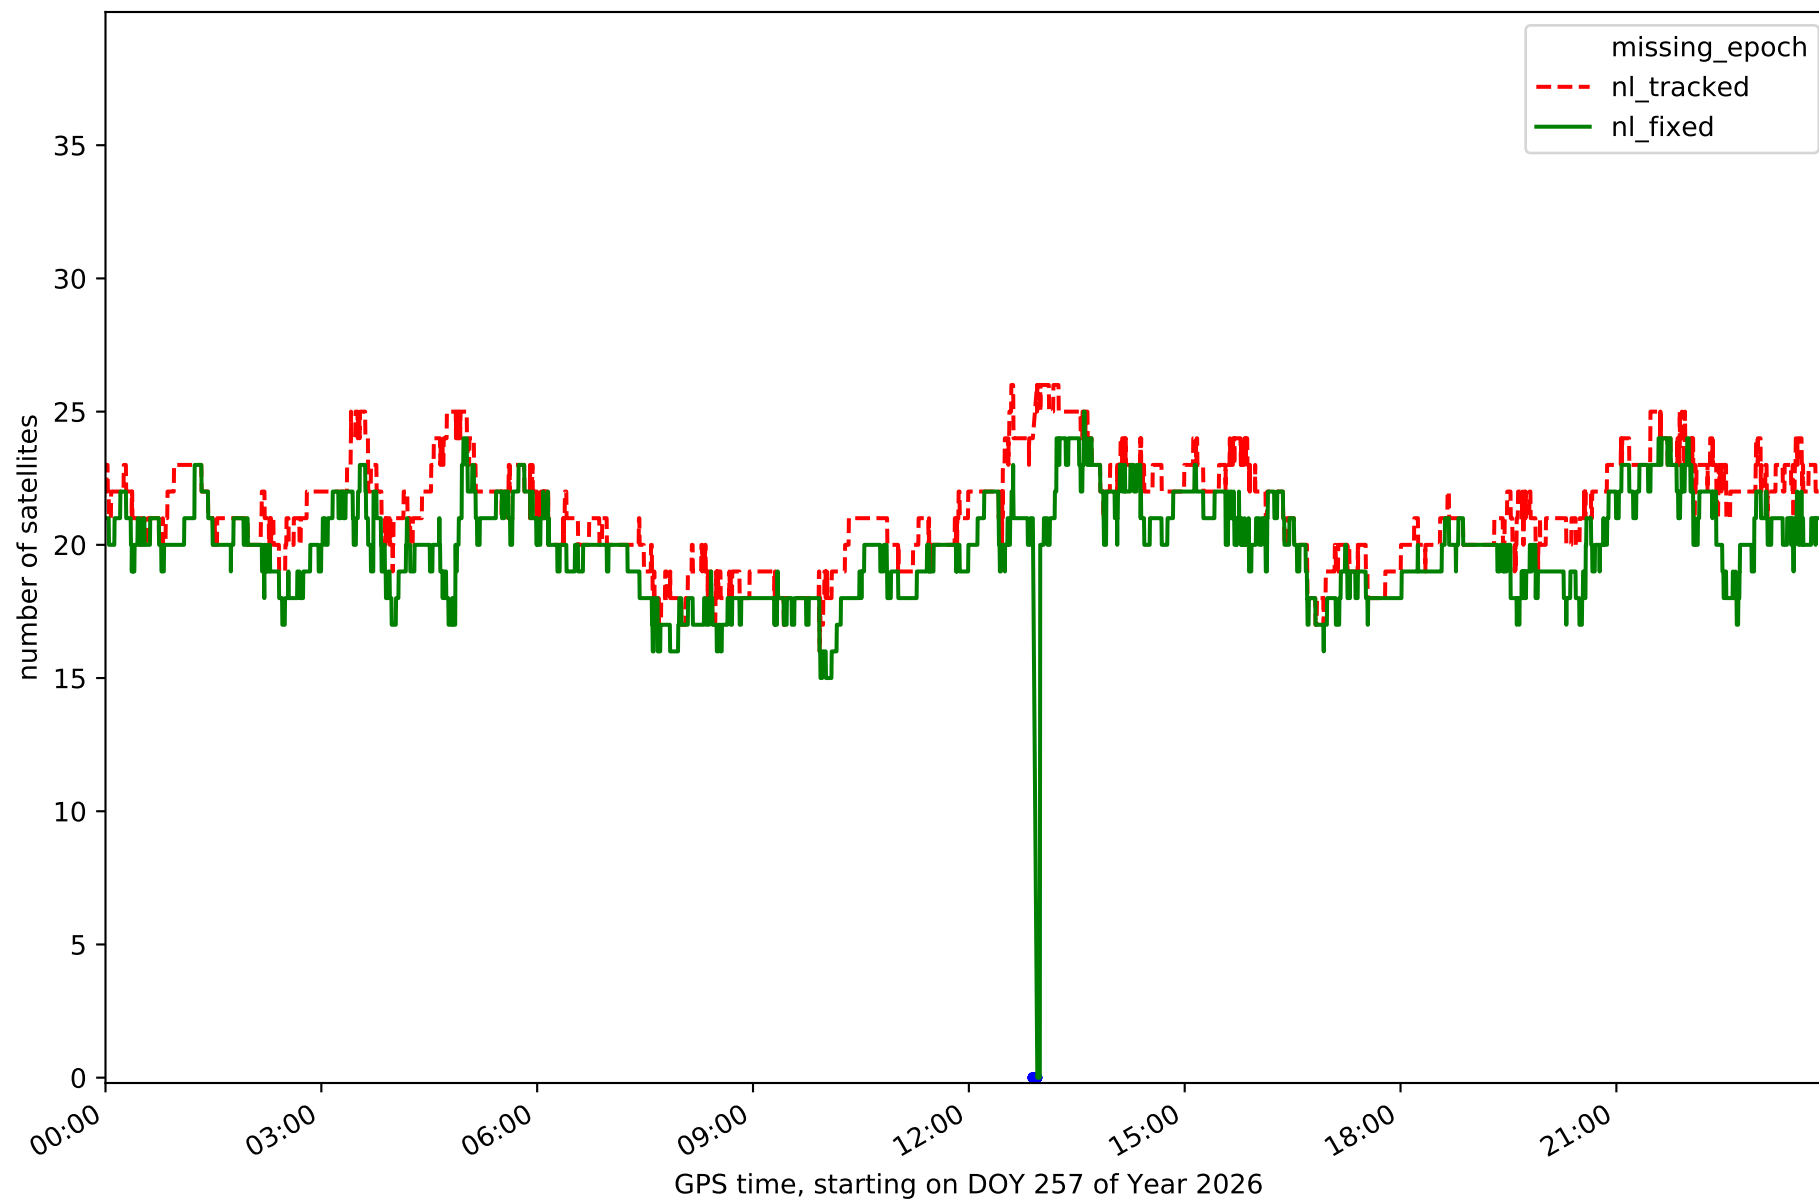


Station EH02 in network NT32

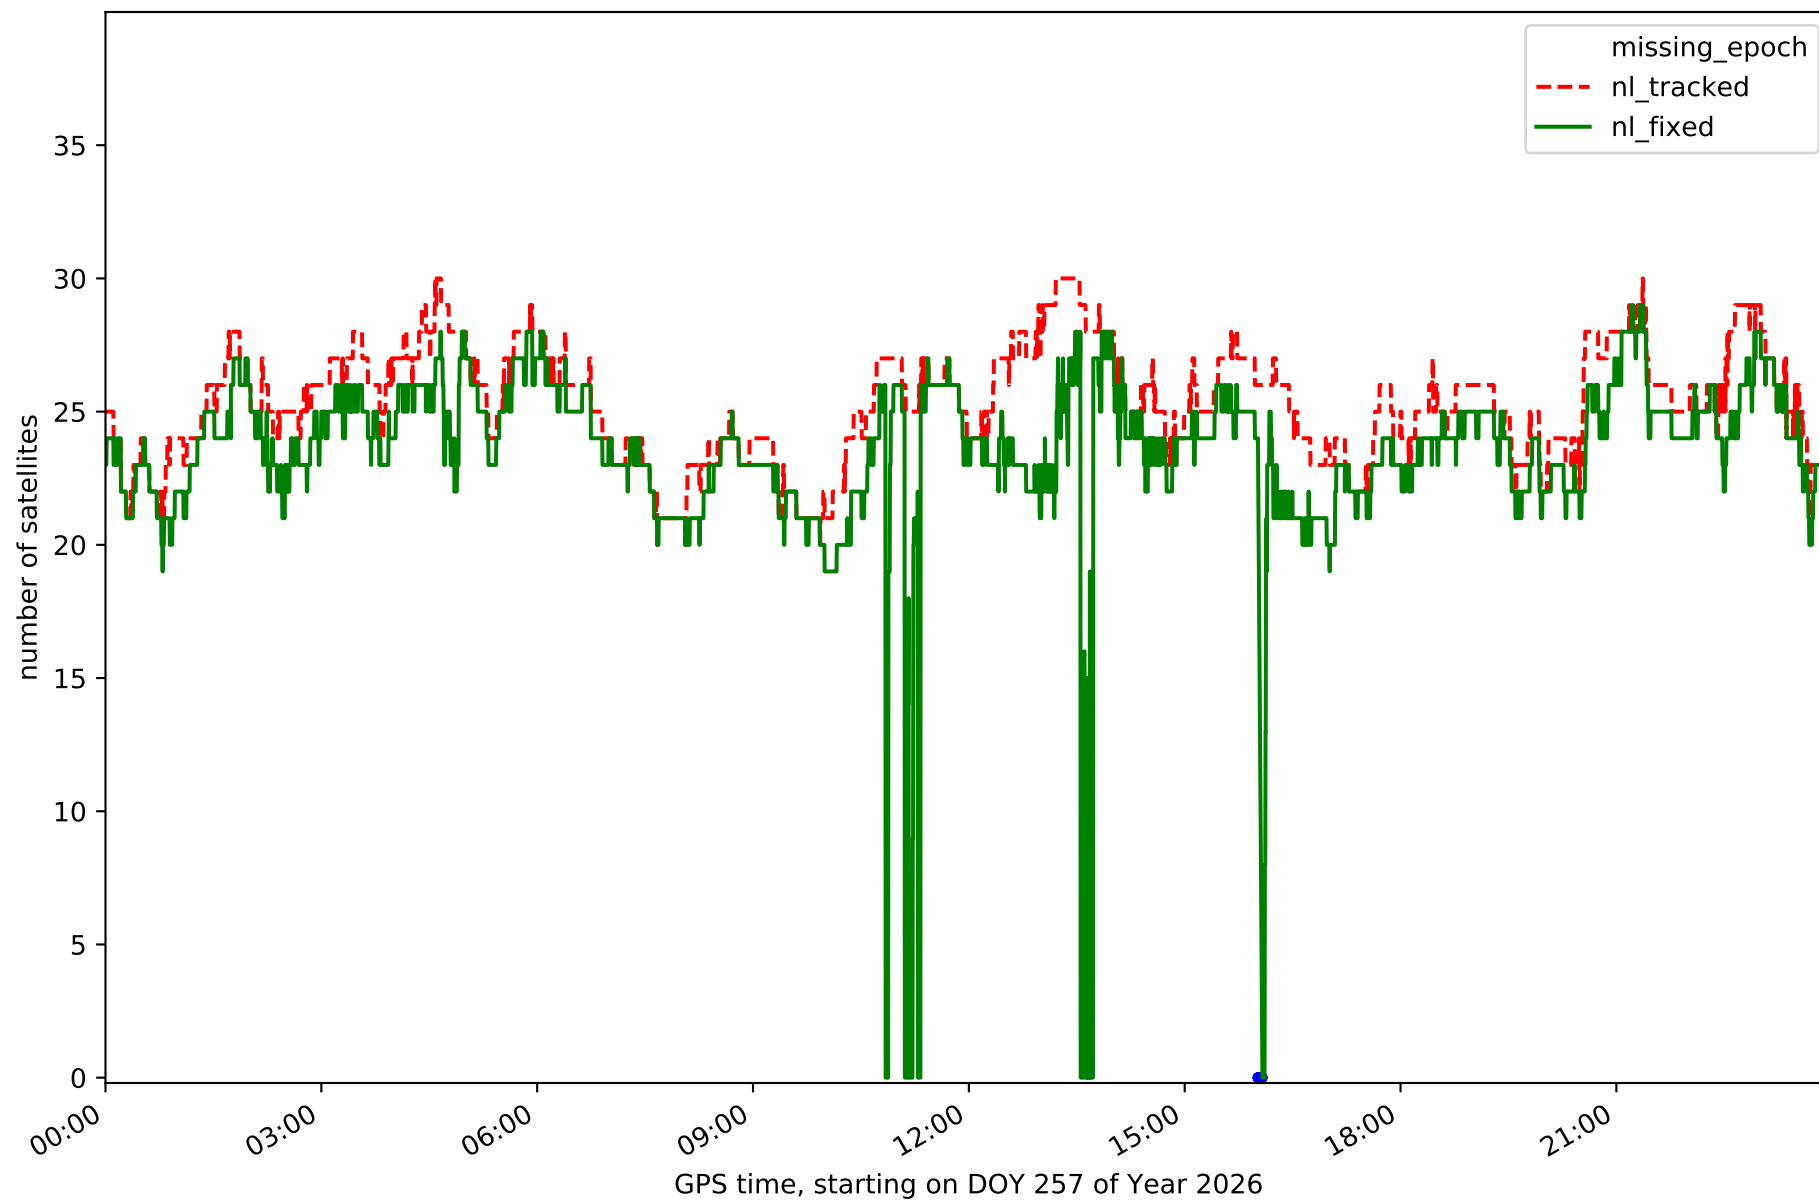


Station GOM1 in network NT32

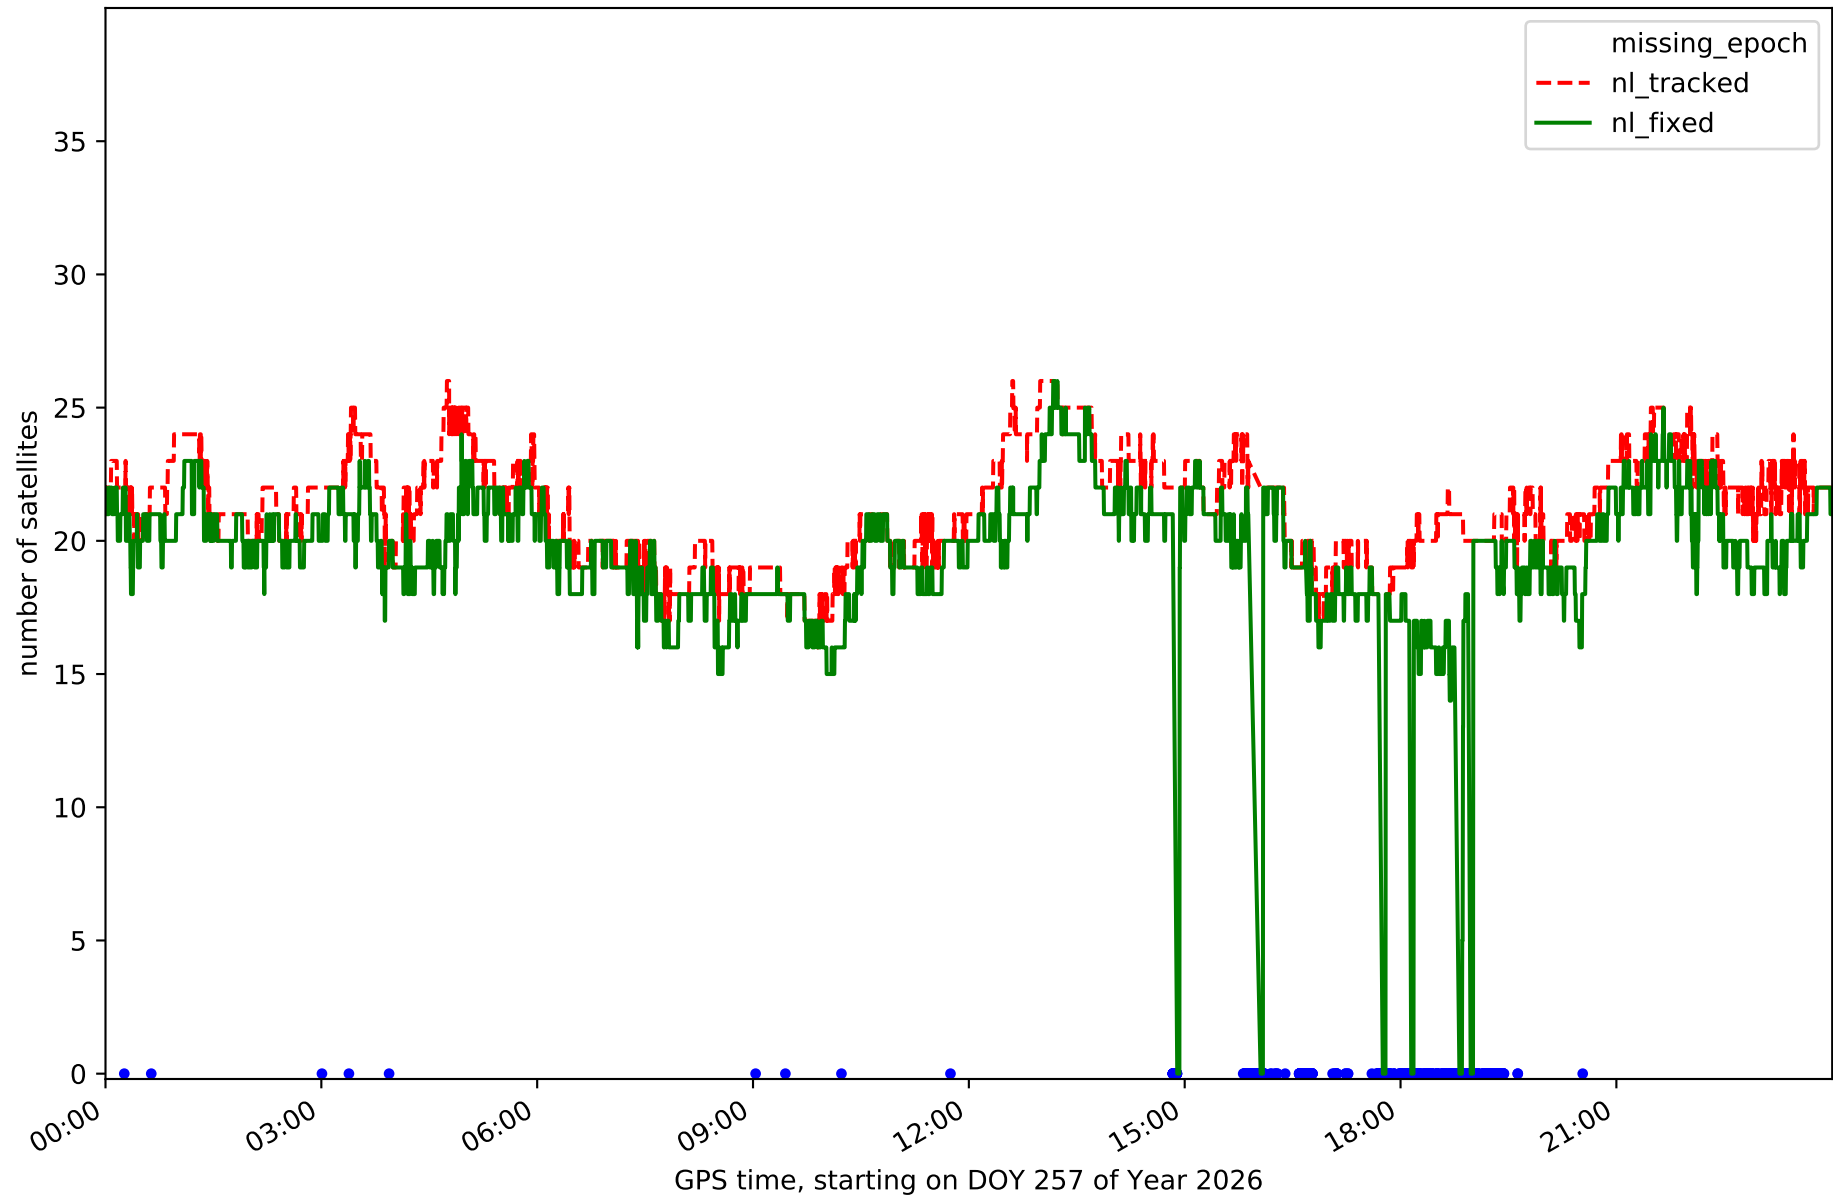


Station GOME in network NT32

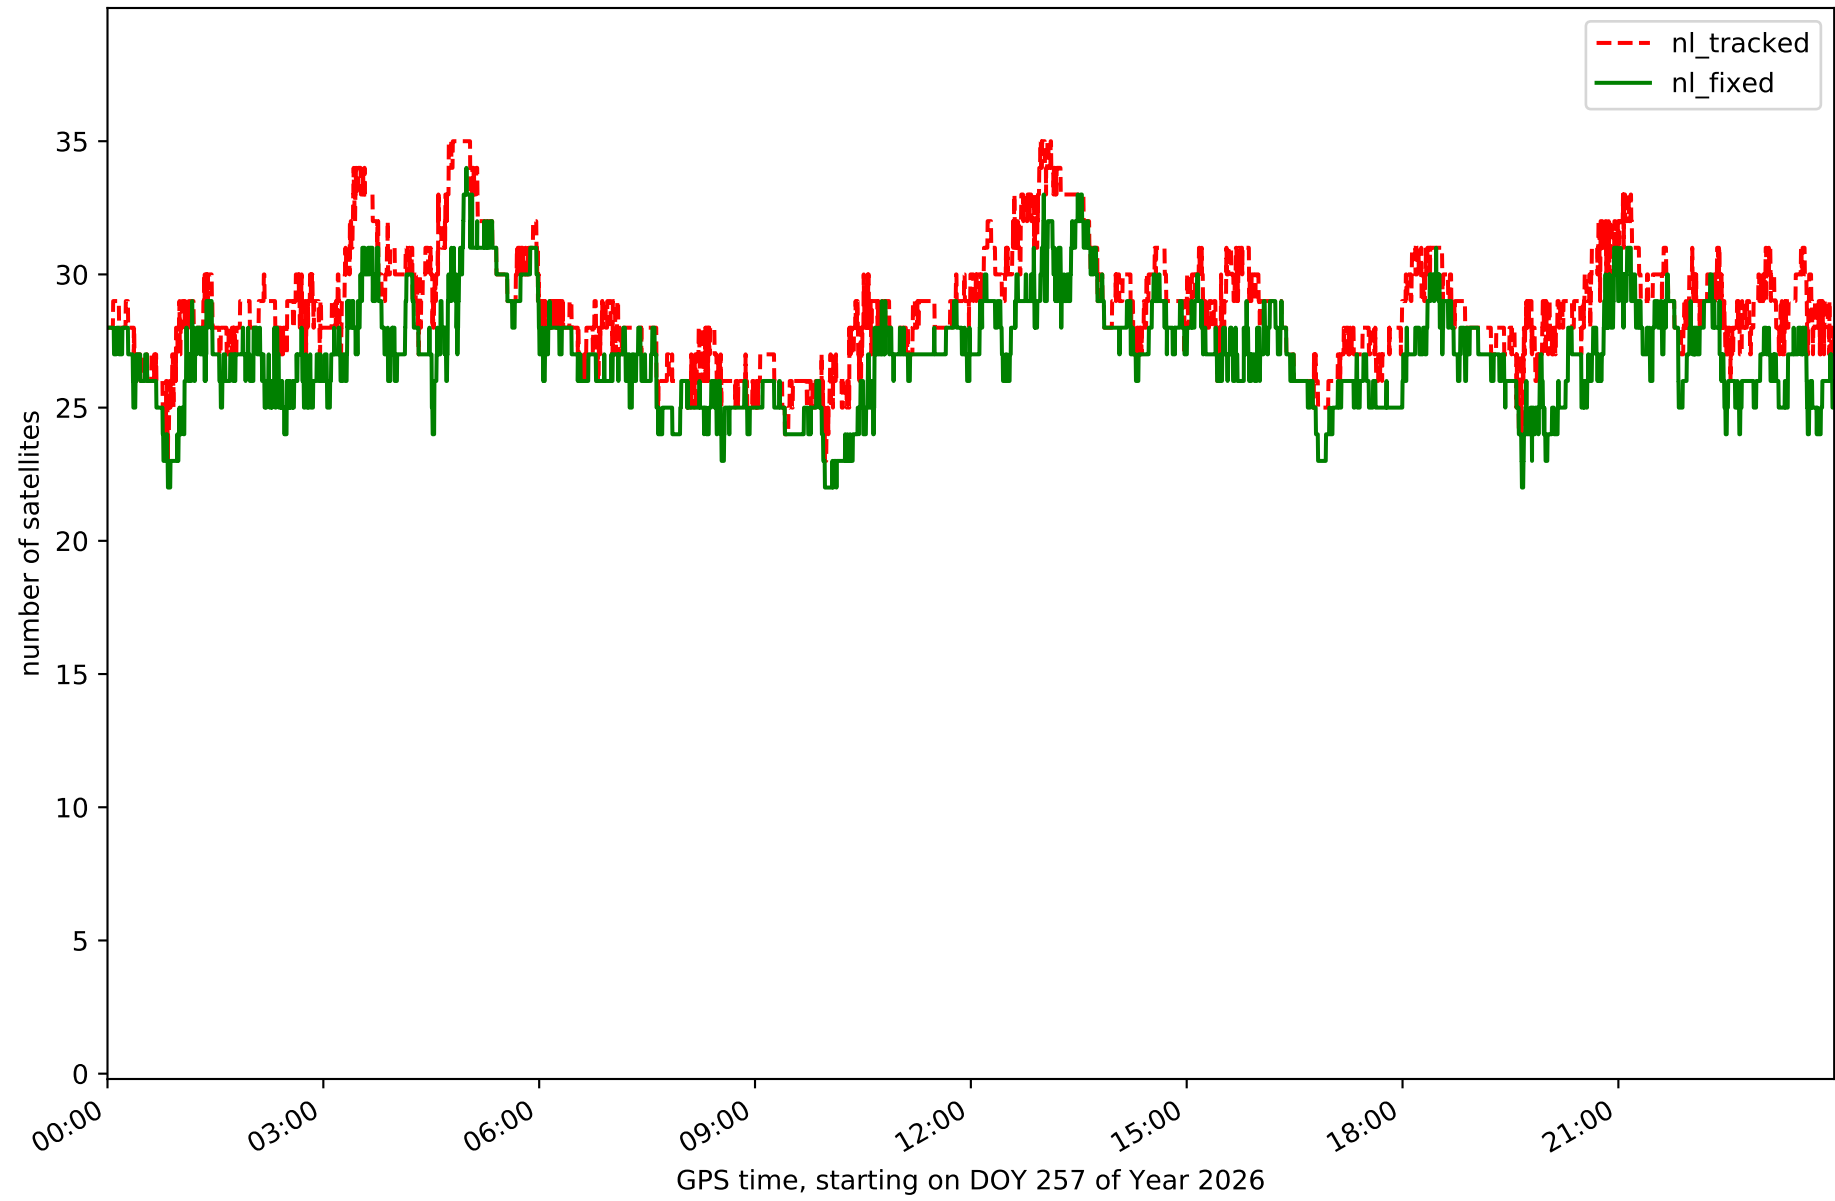


Station IZAN in network NT32

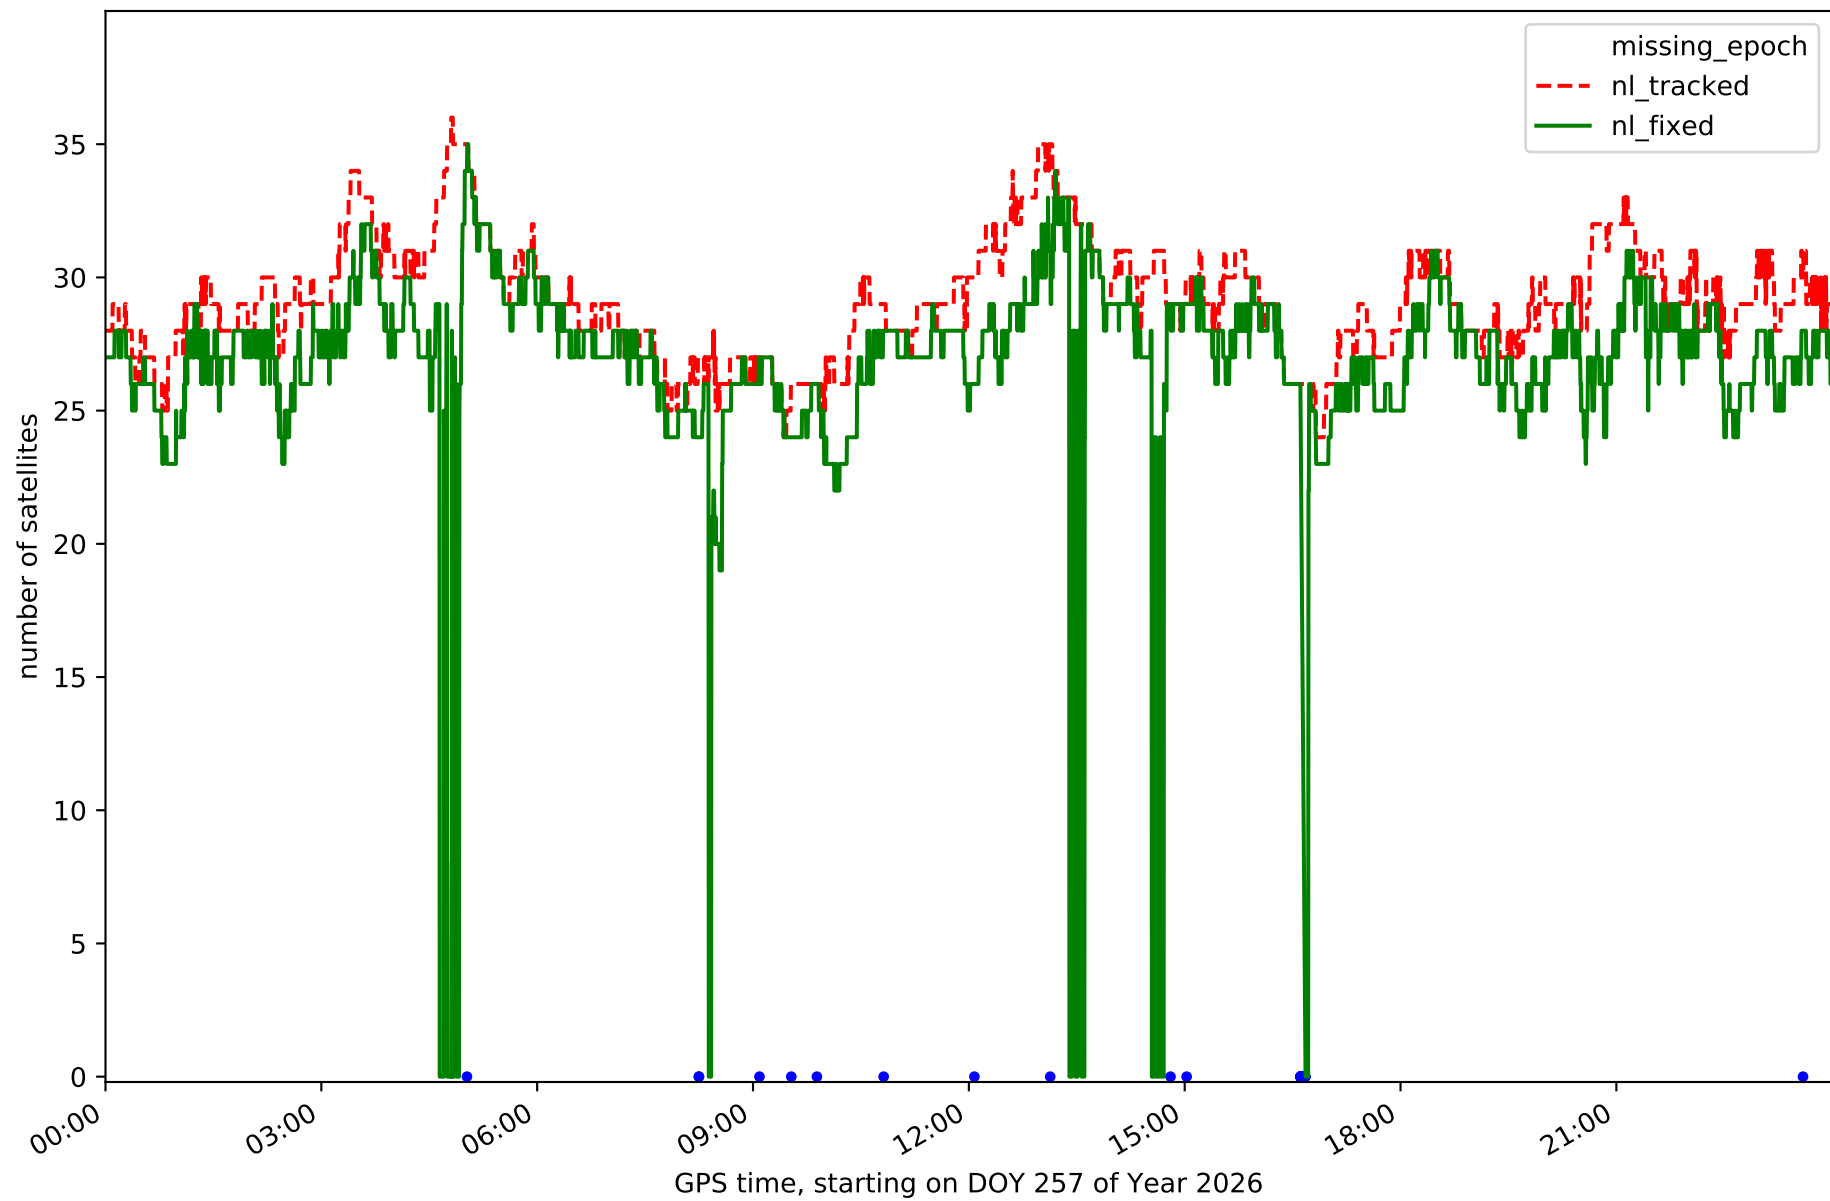


Station LP01 in network NT32

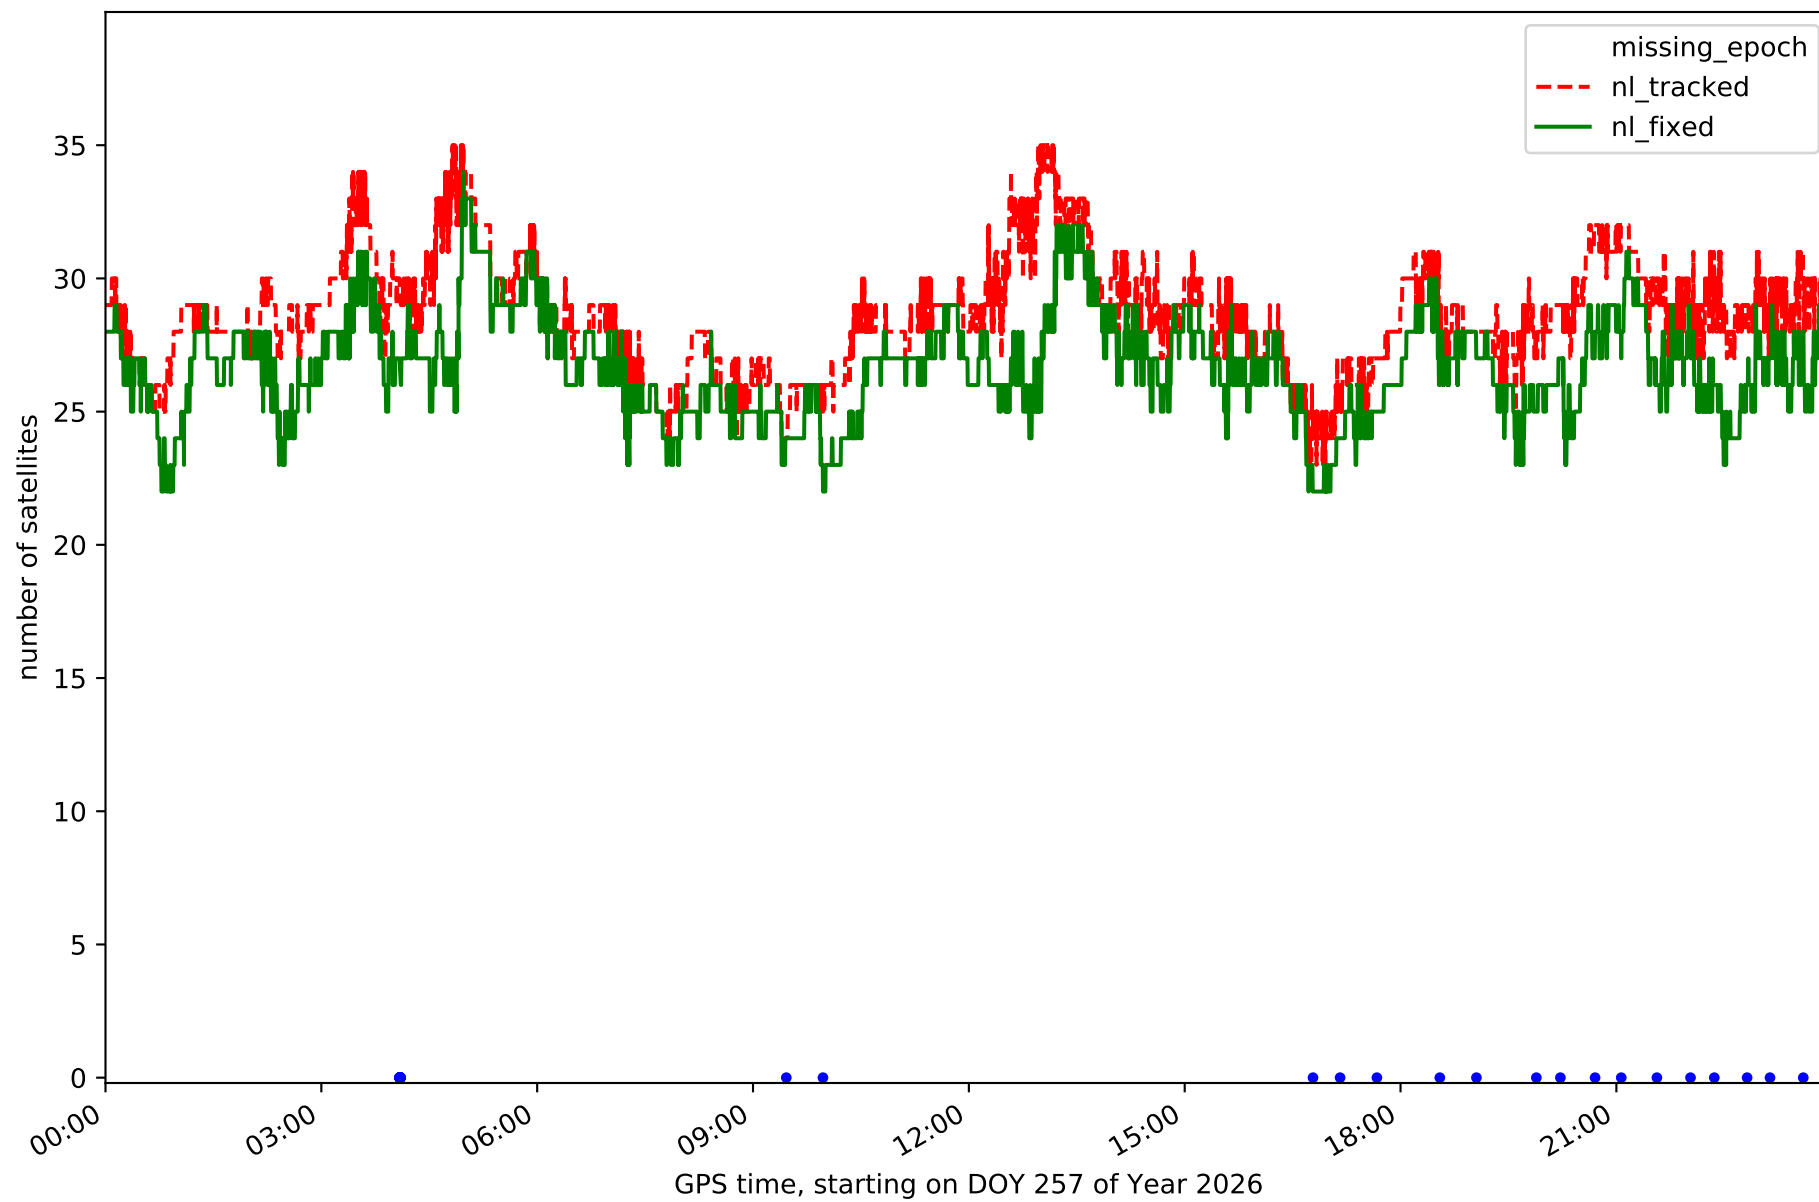


Station LP03 in network NT32

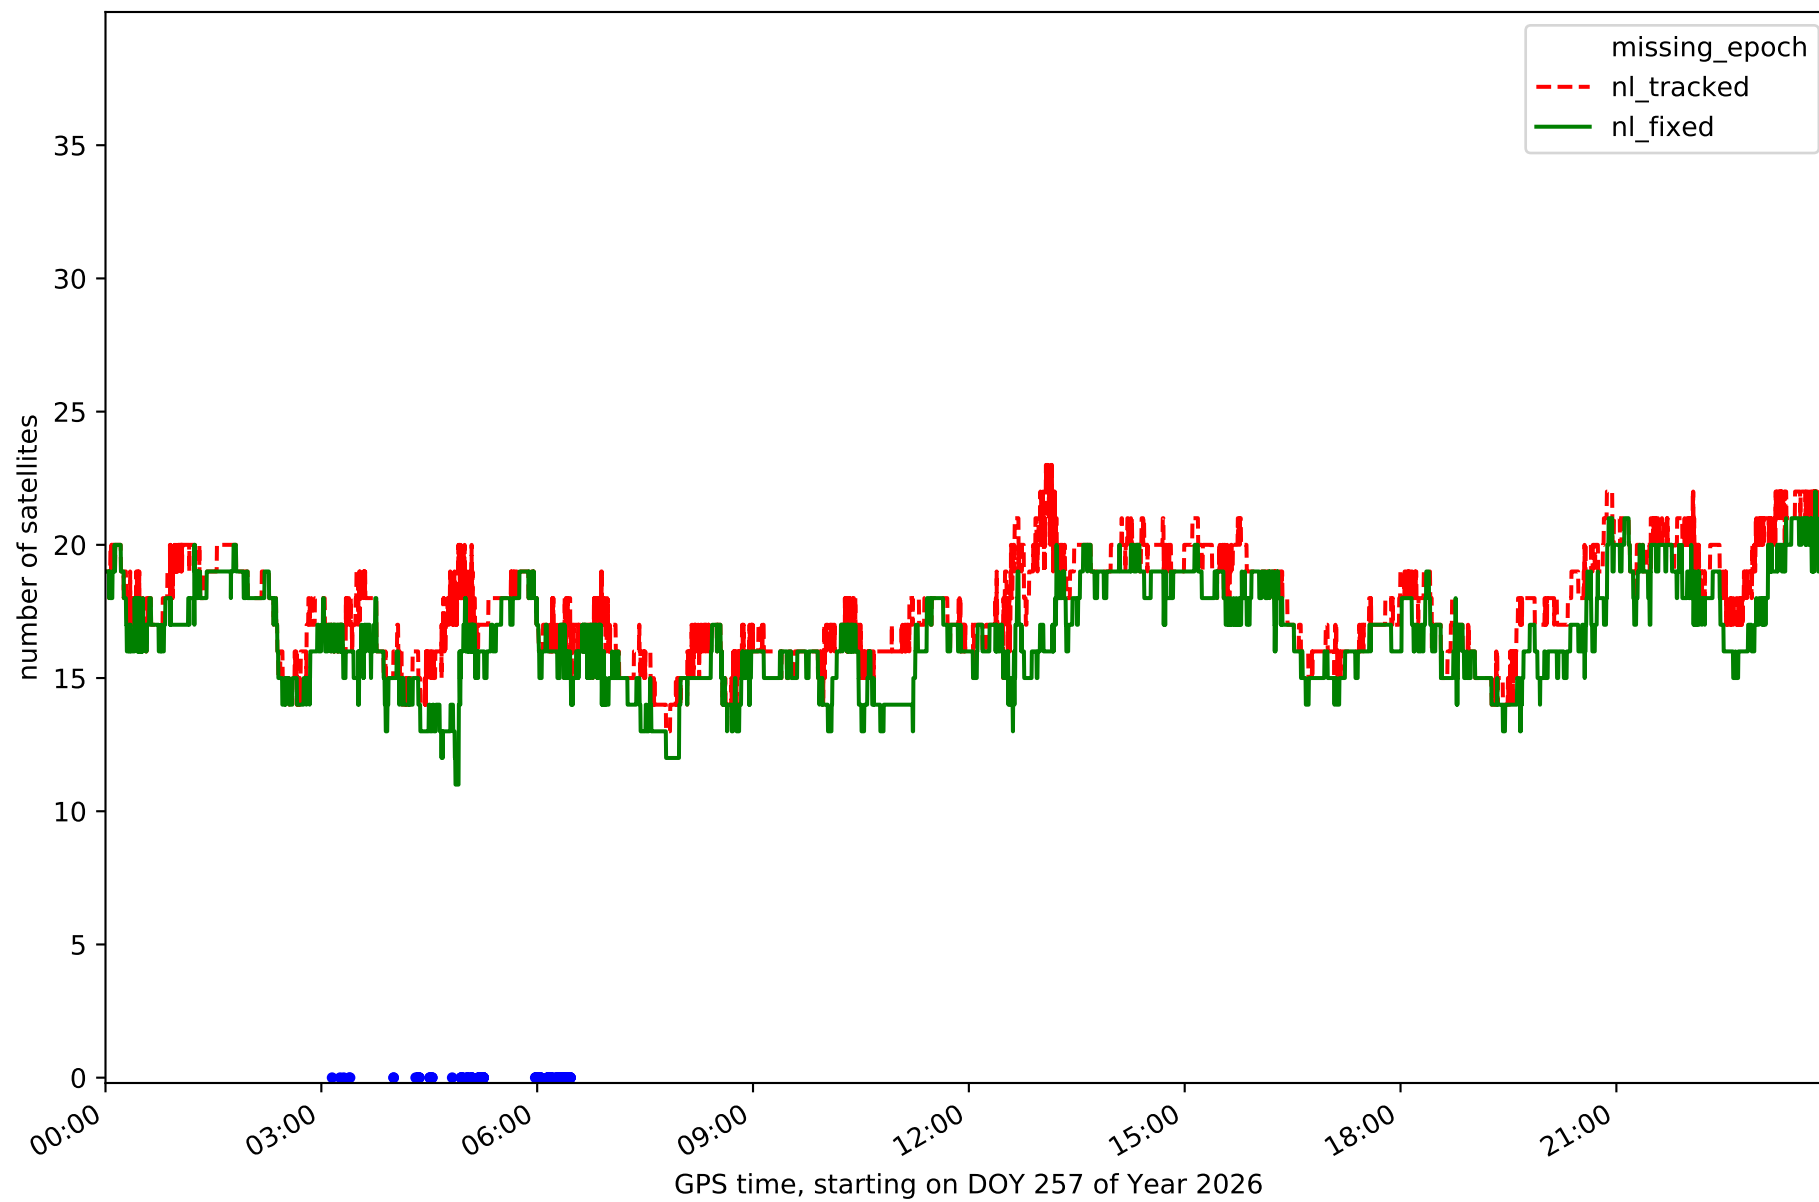


Station LPAL in network NT32

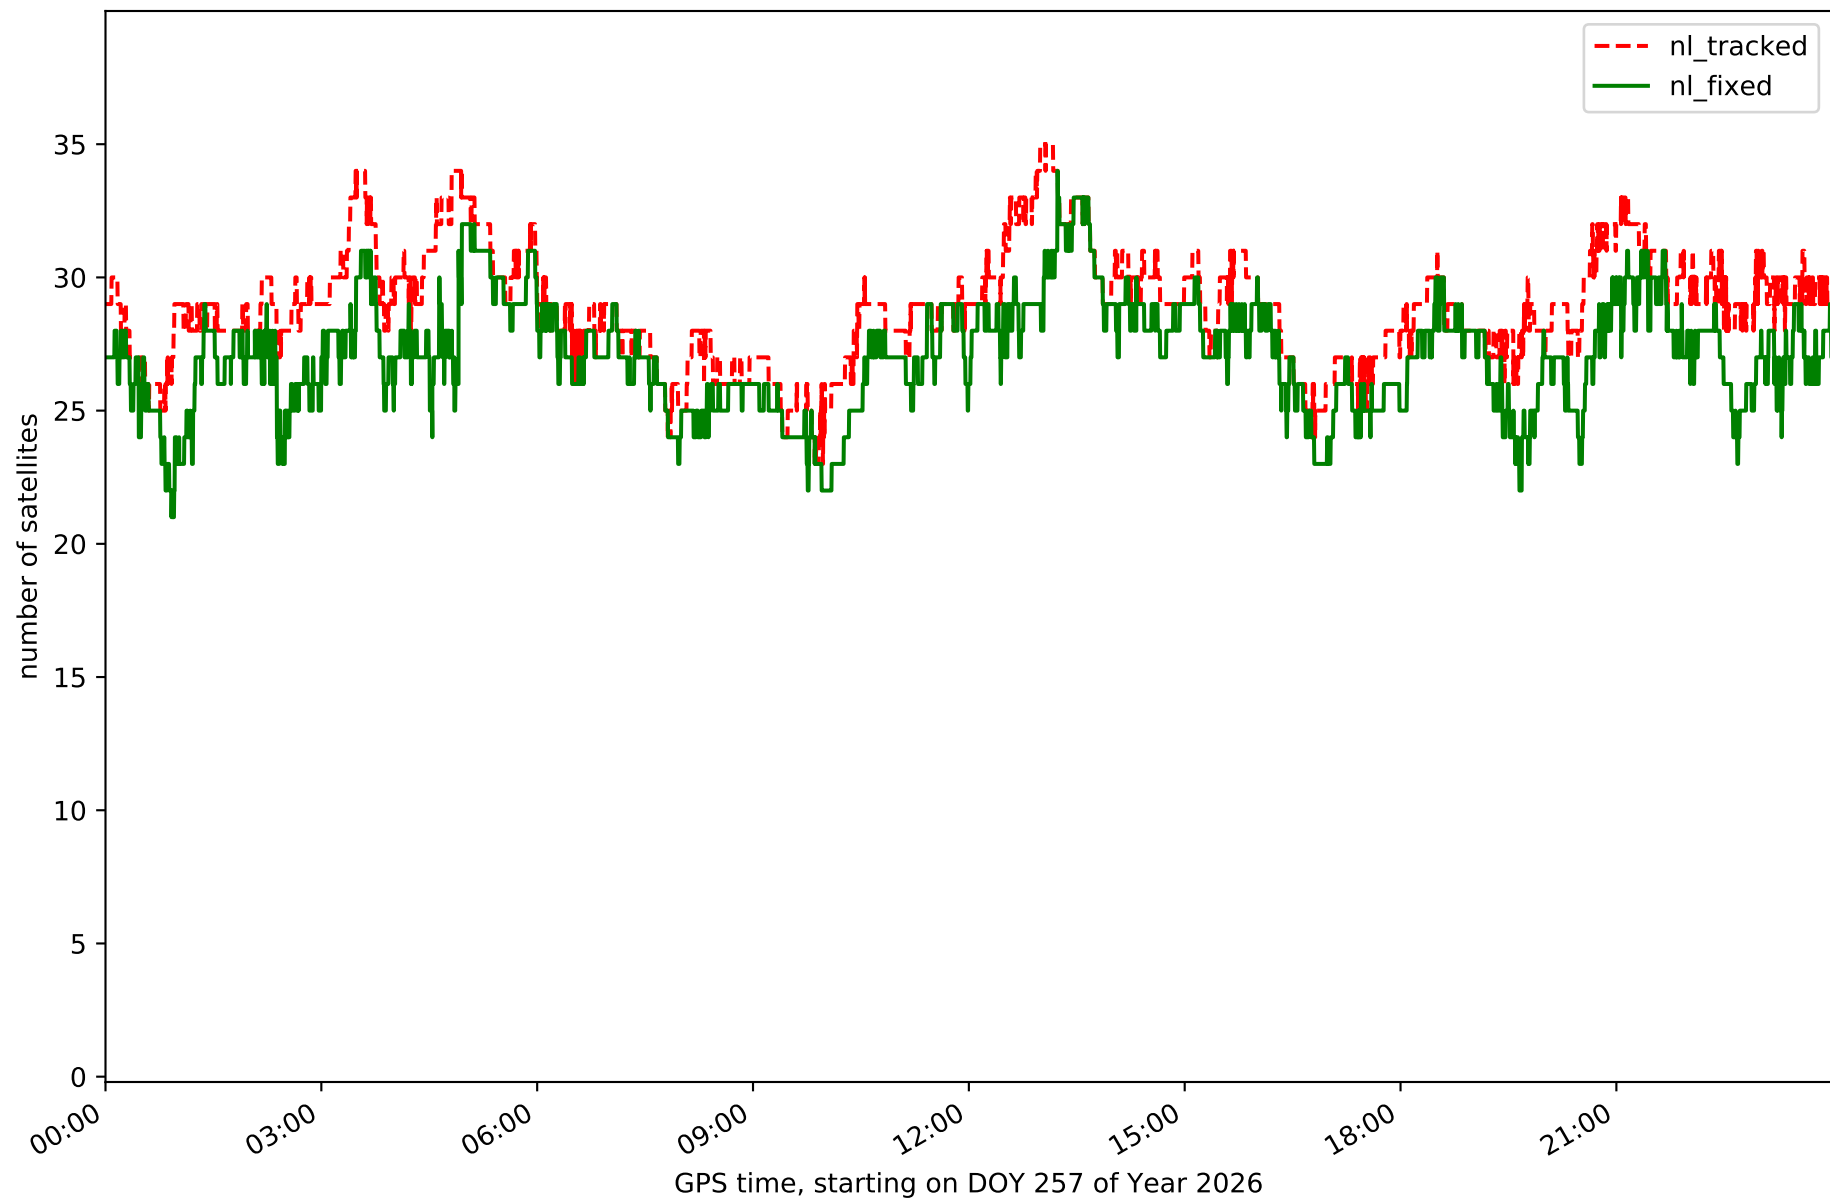


Station LRES in network NT32

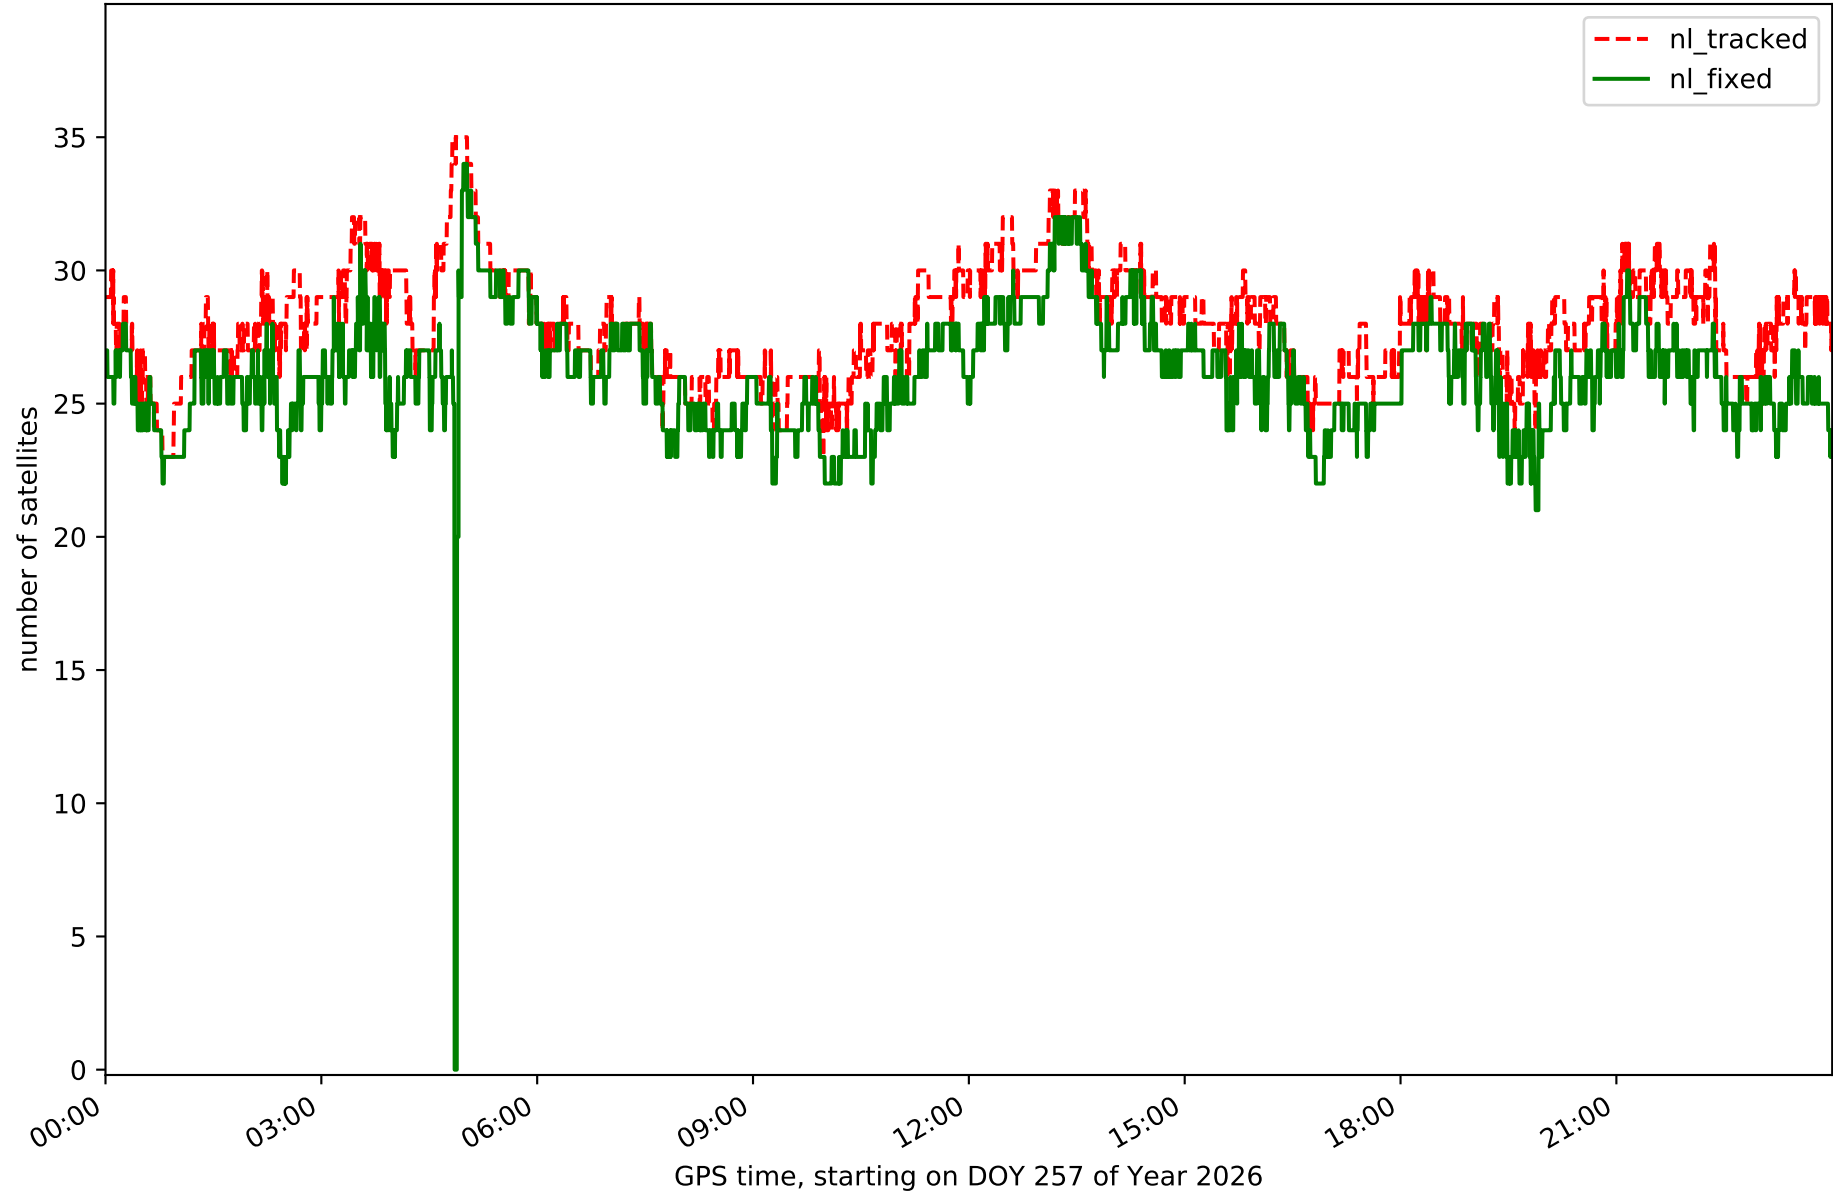


Station TN01 in network NT32

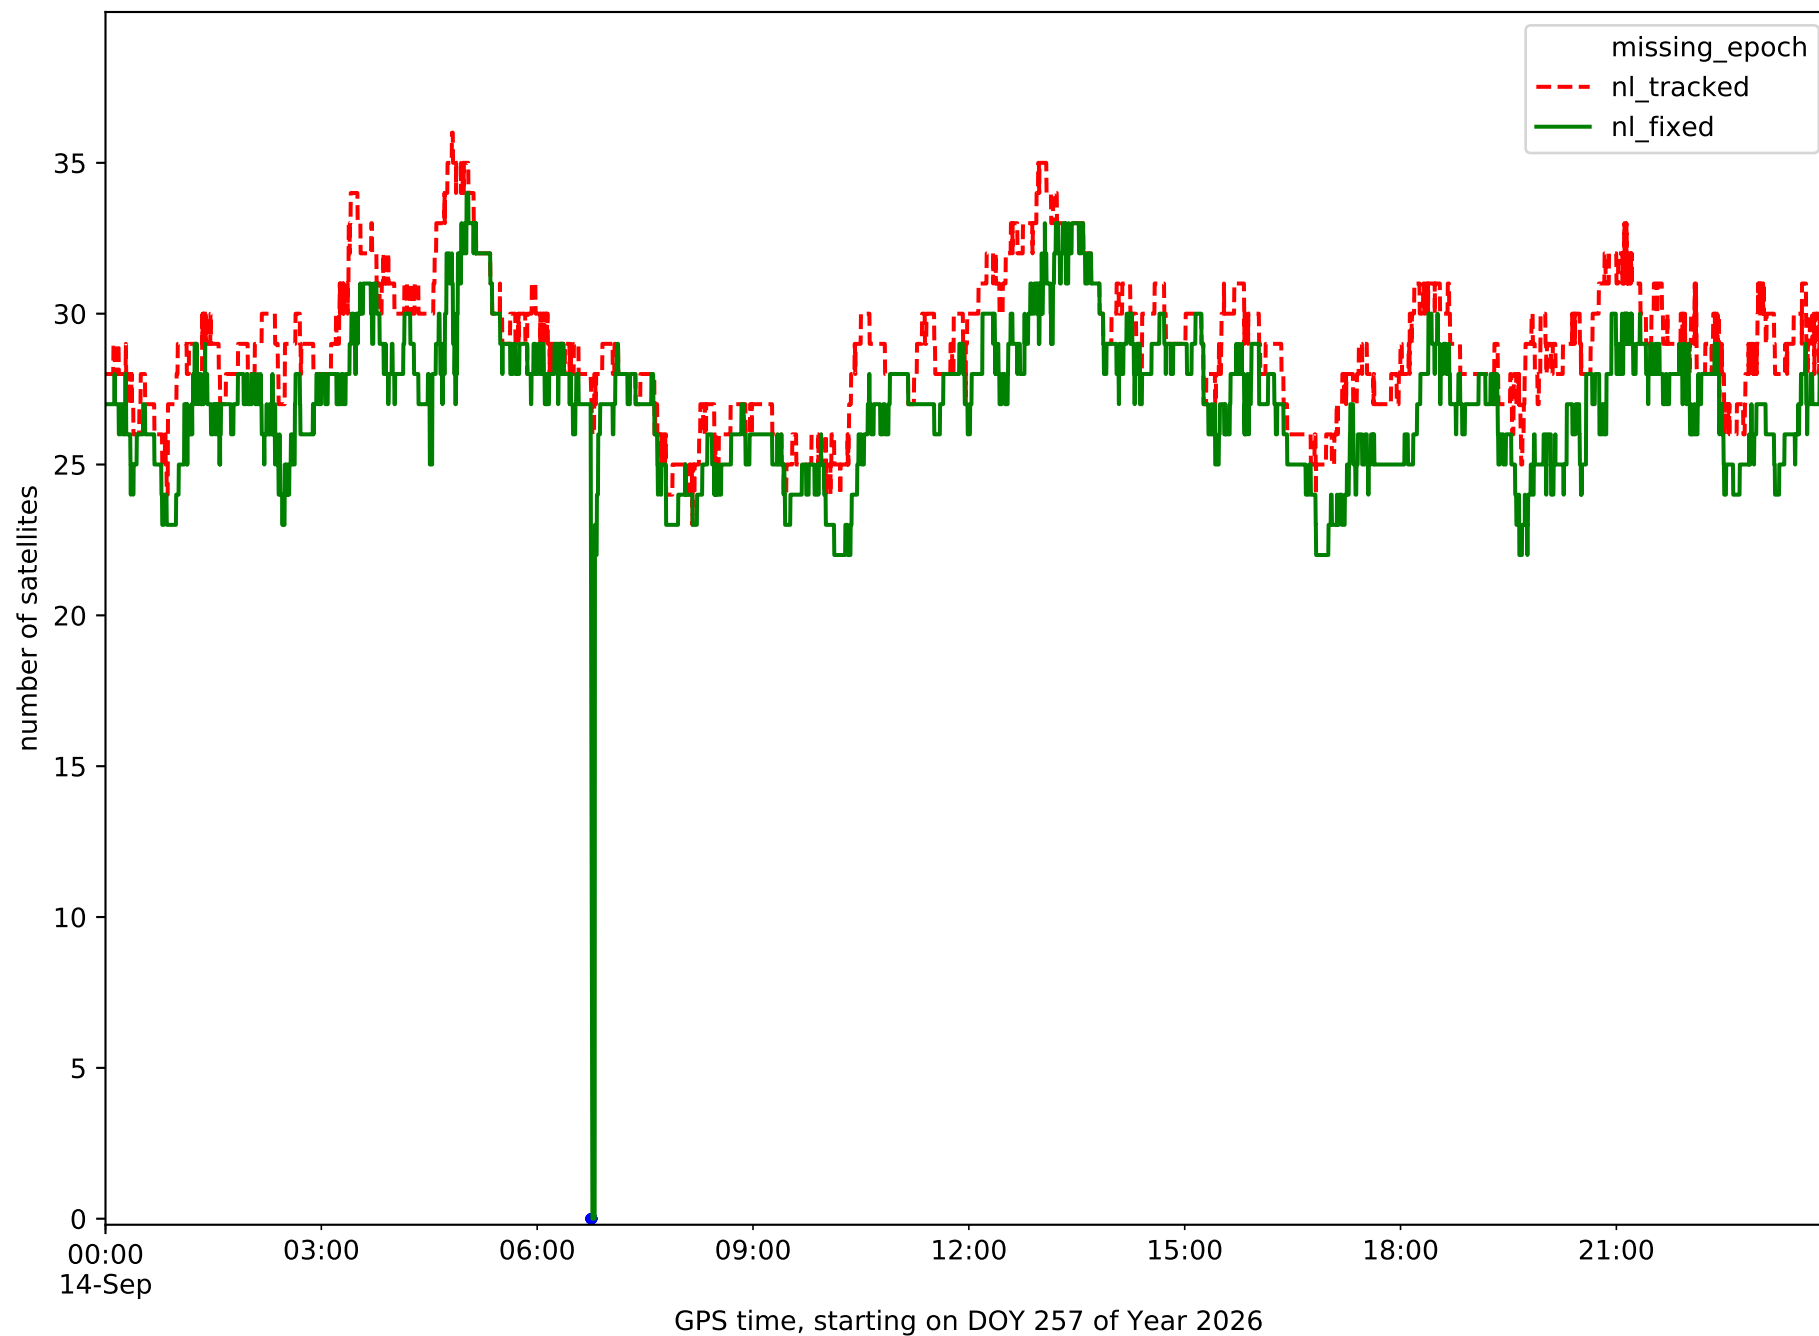


Station TN02 in network NT32

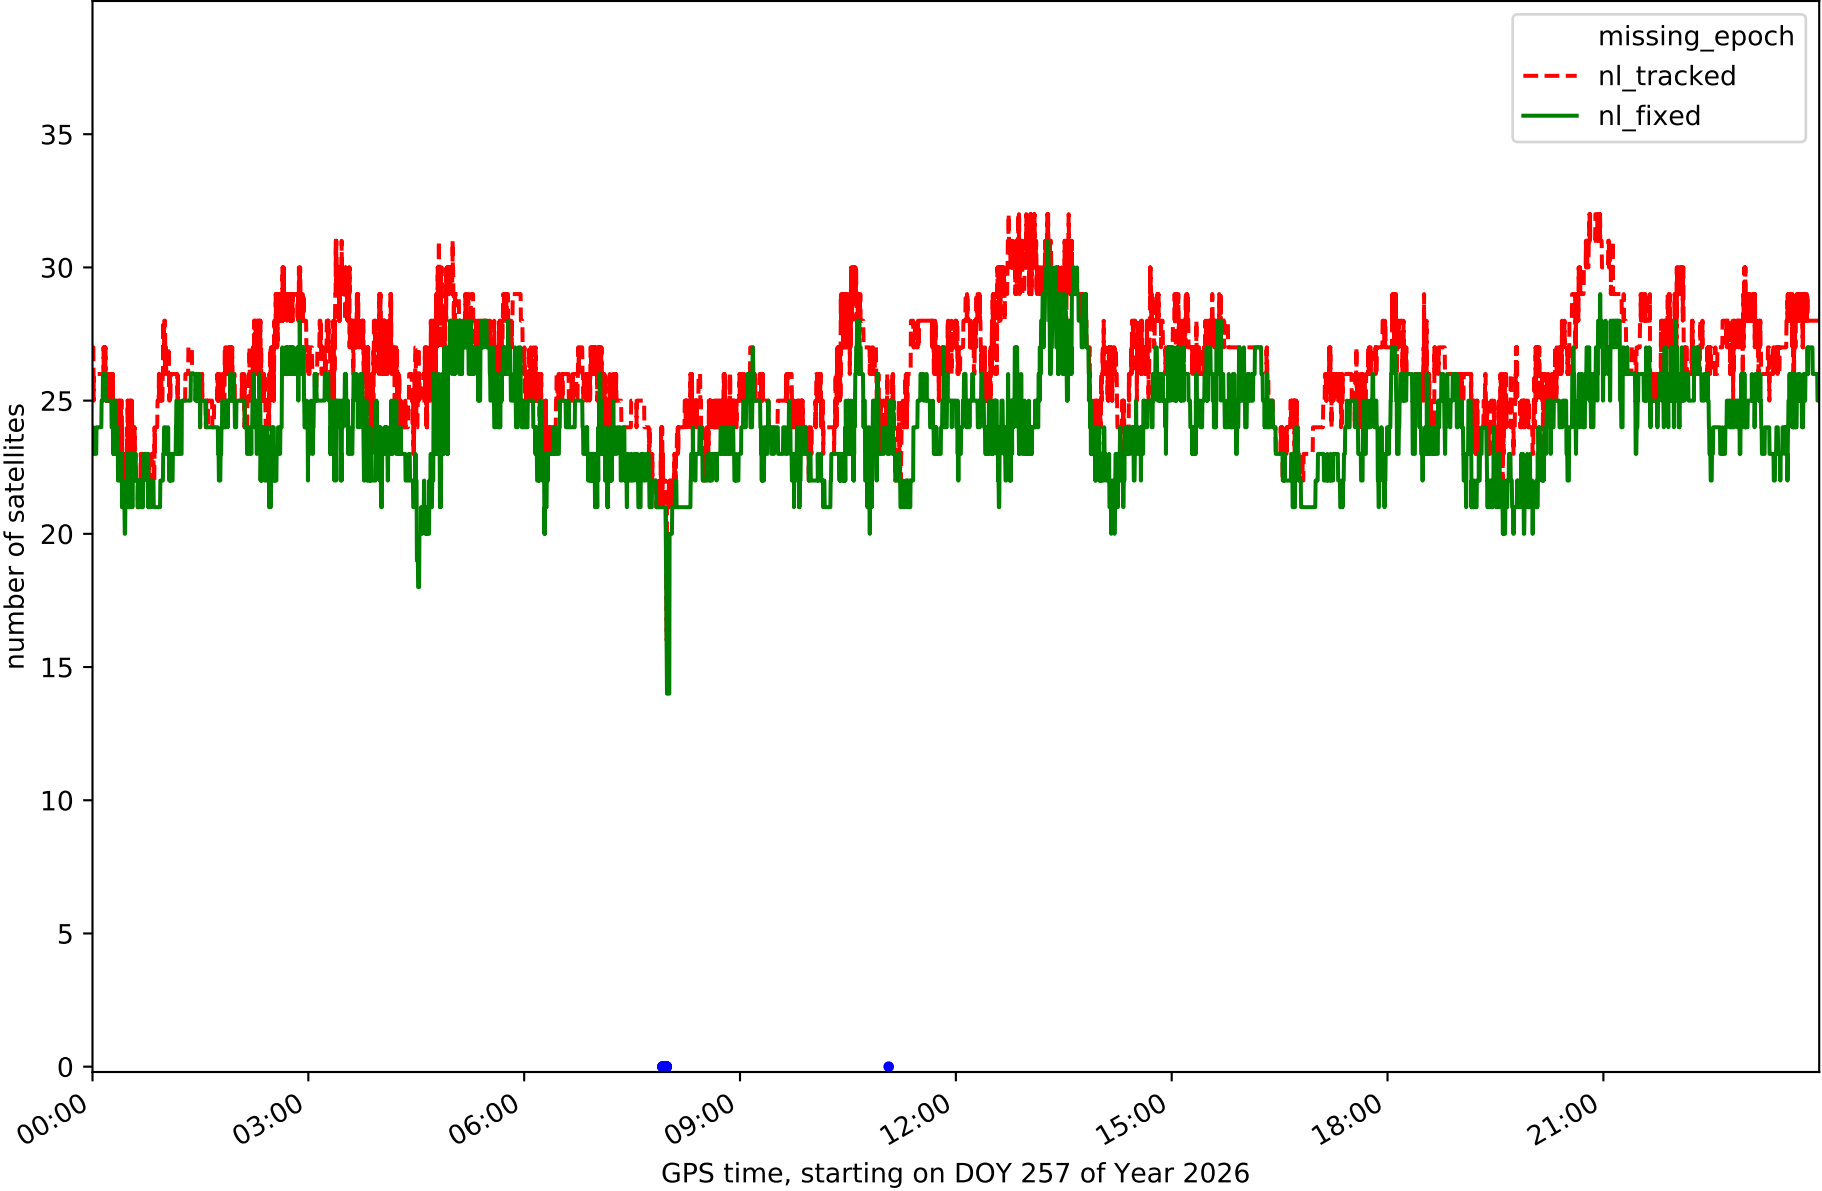


Station TN03 in network NT32

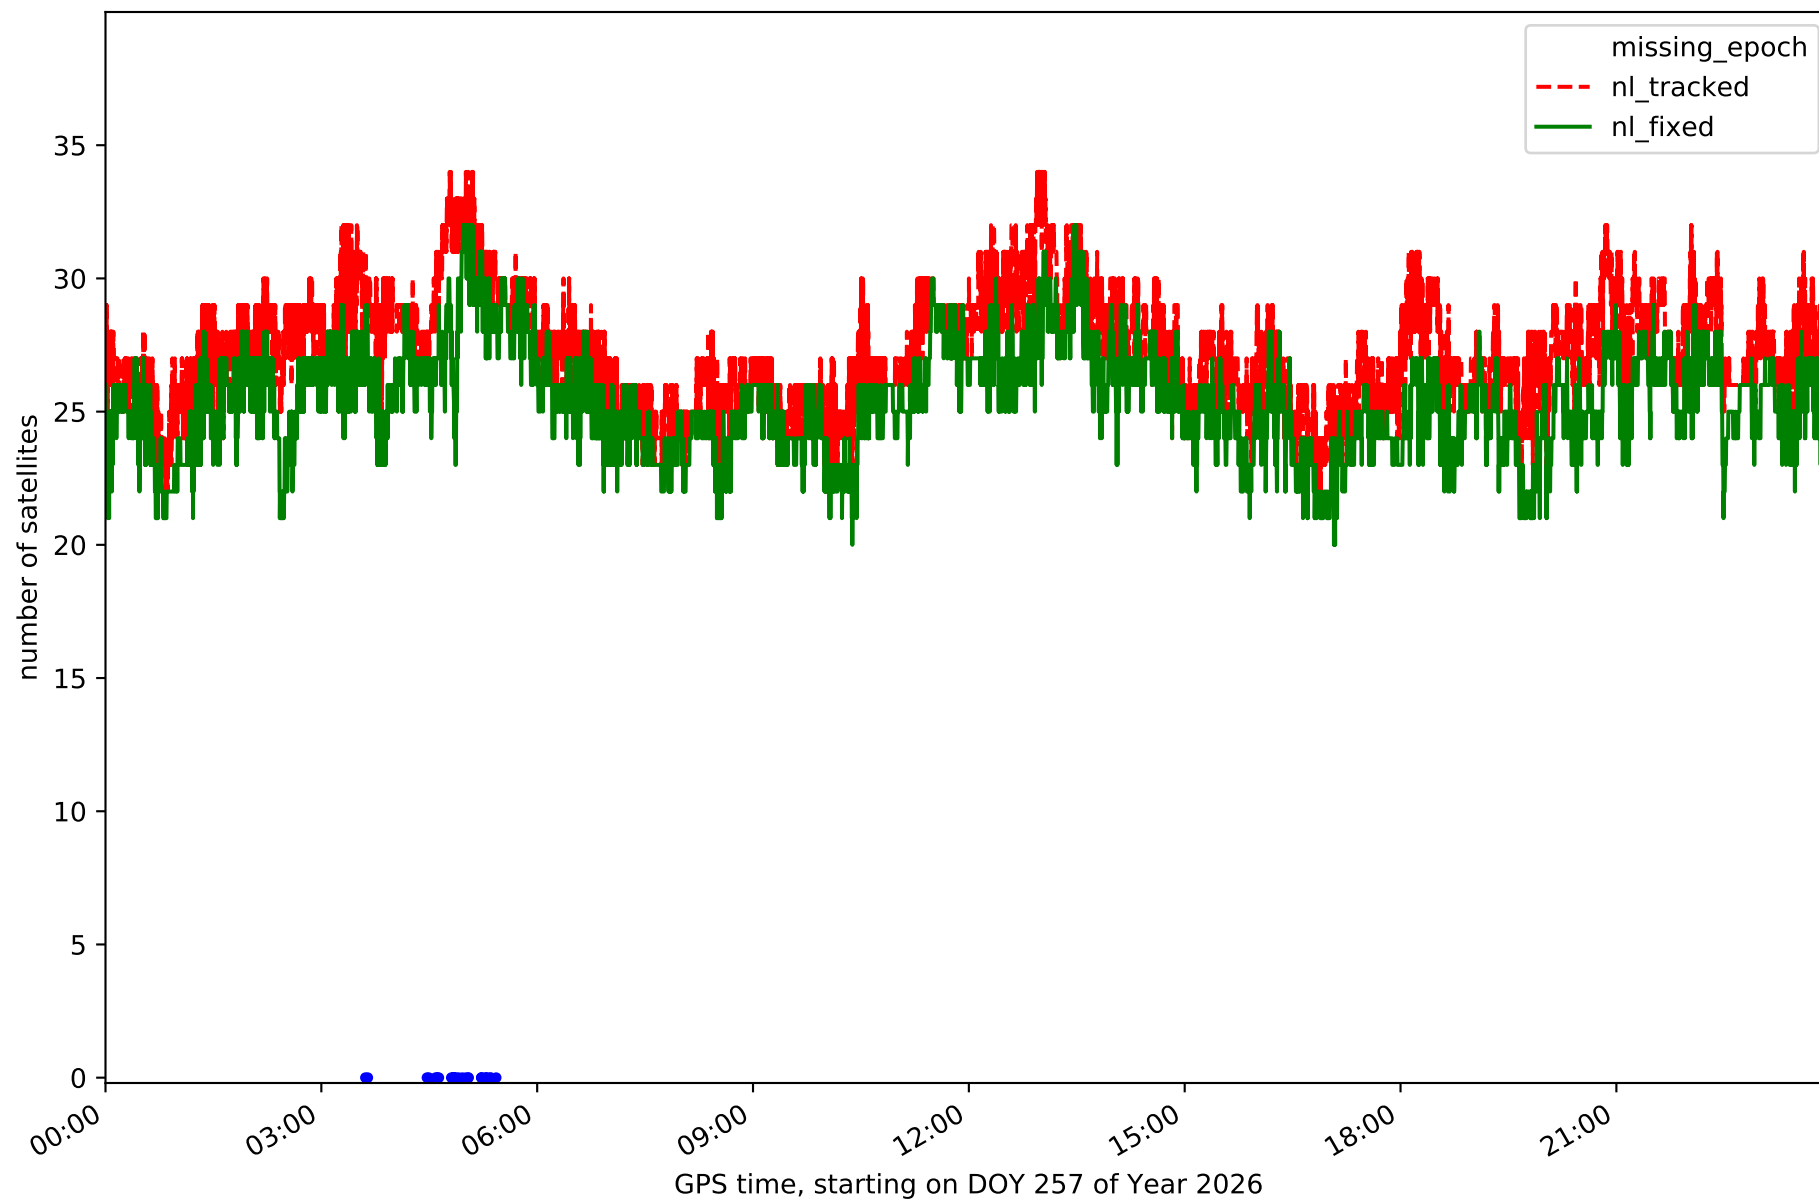


Station TN06 in network NT32

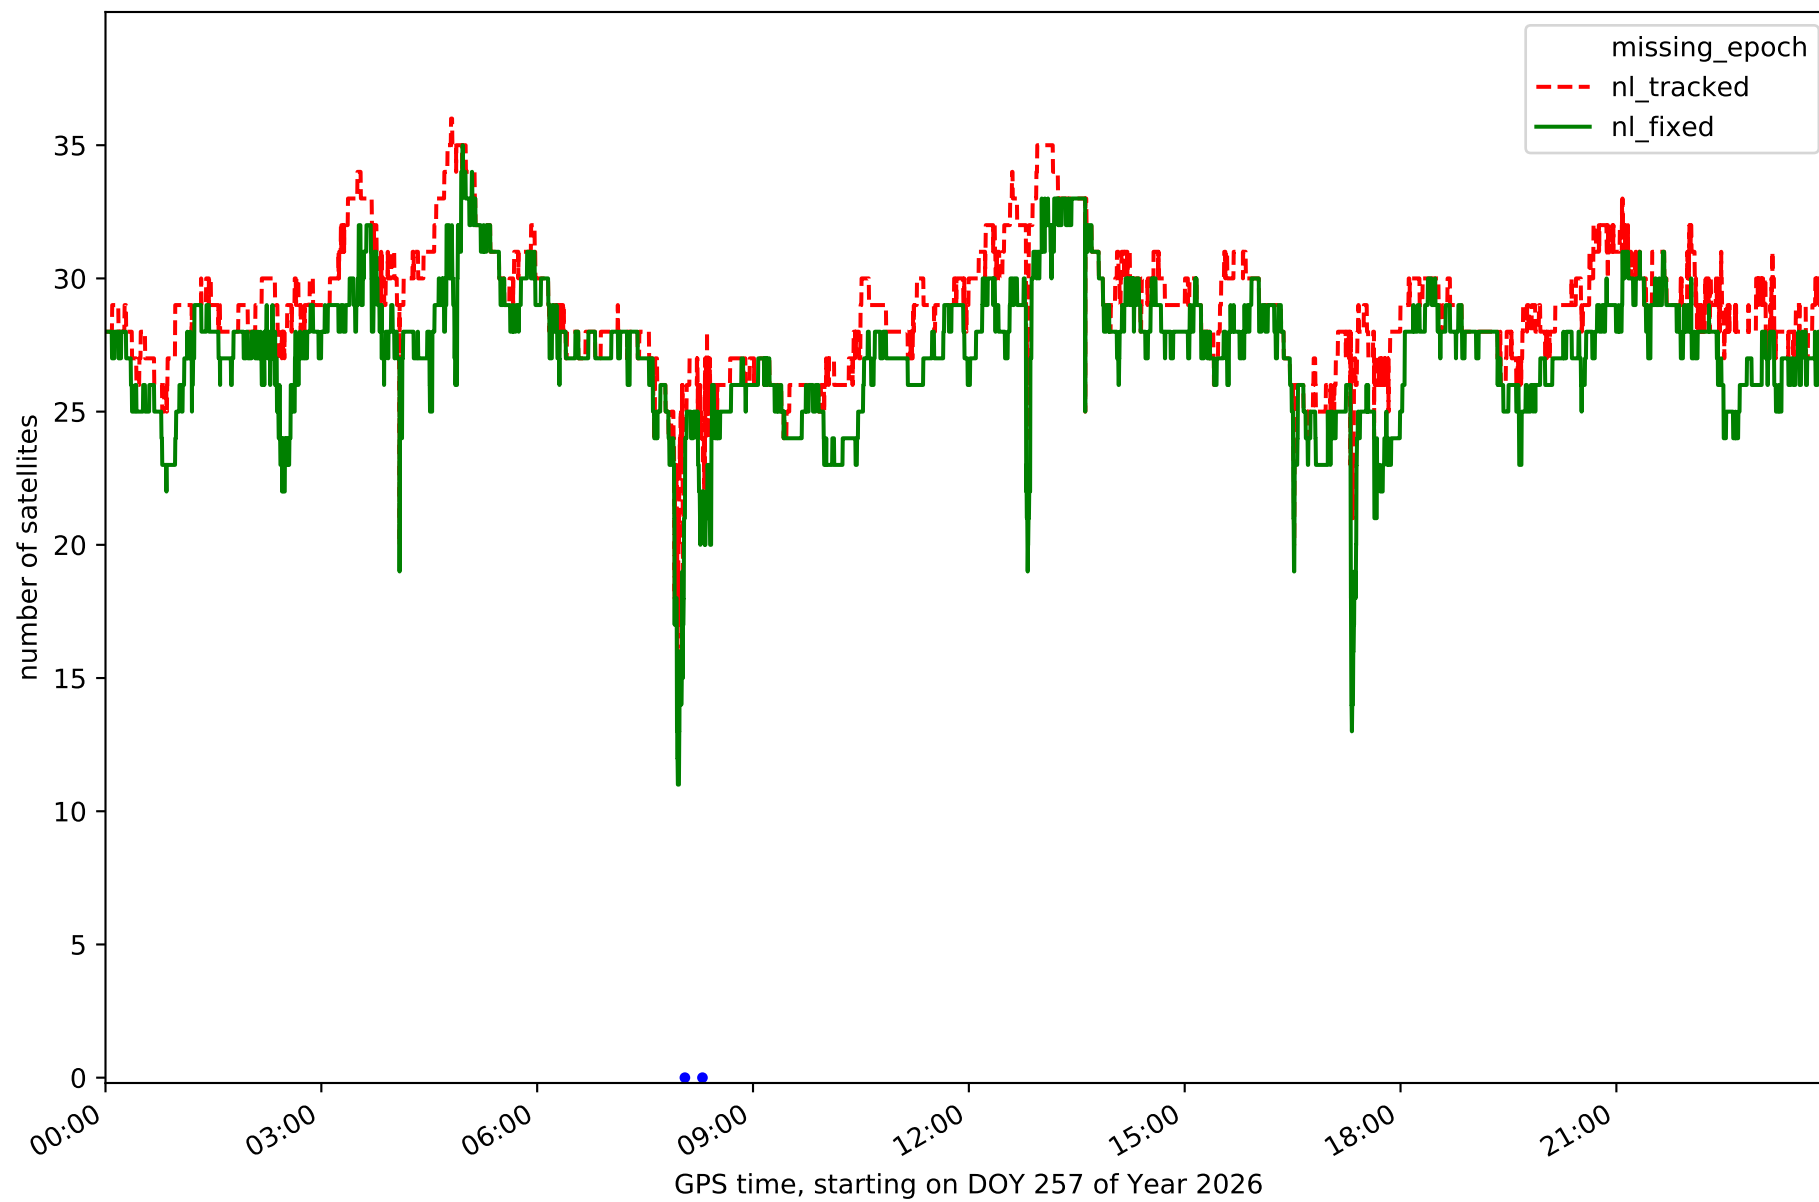


Station TN09 in network NT32

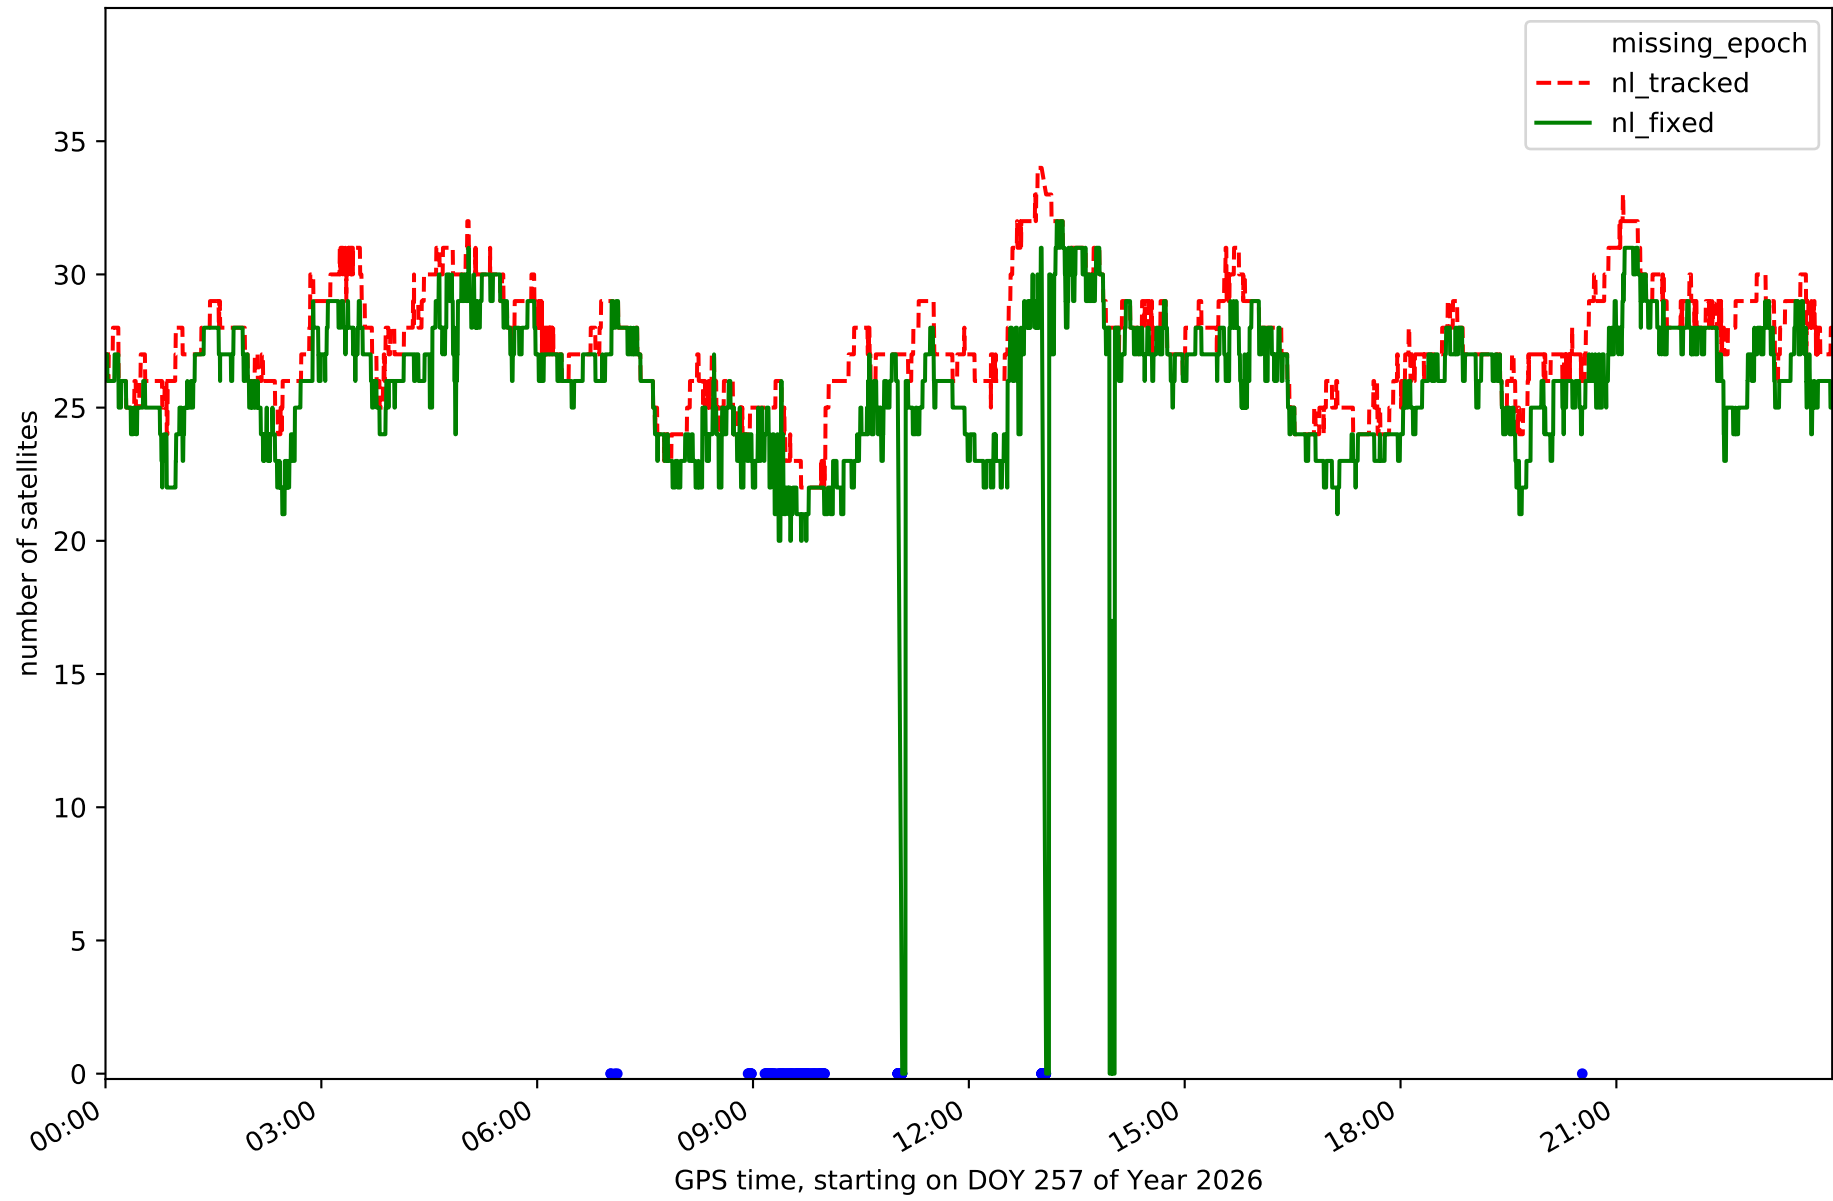


Station TE11 in network NT32

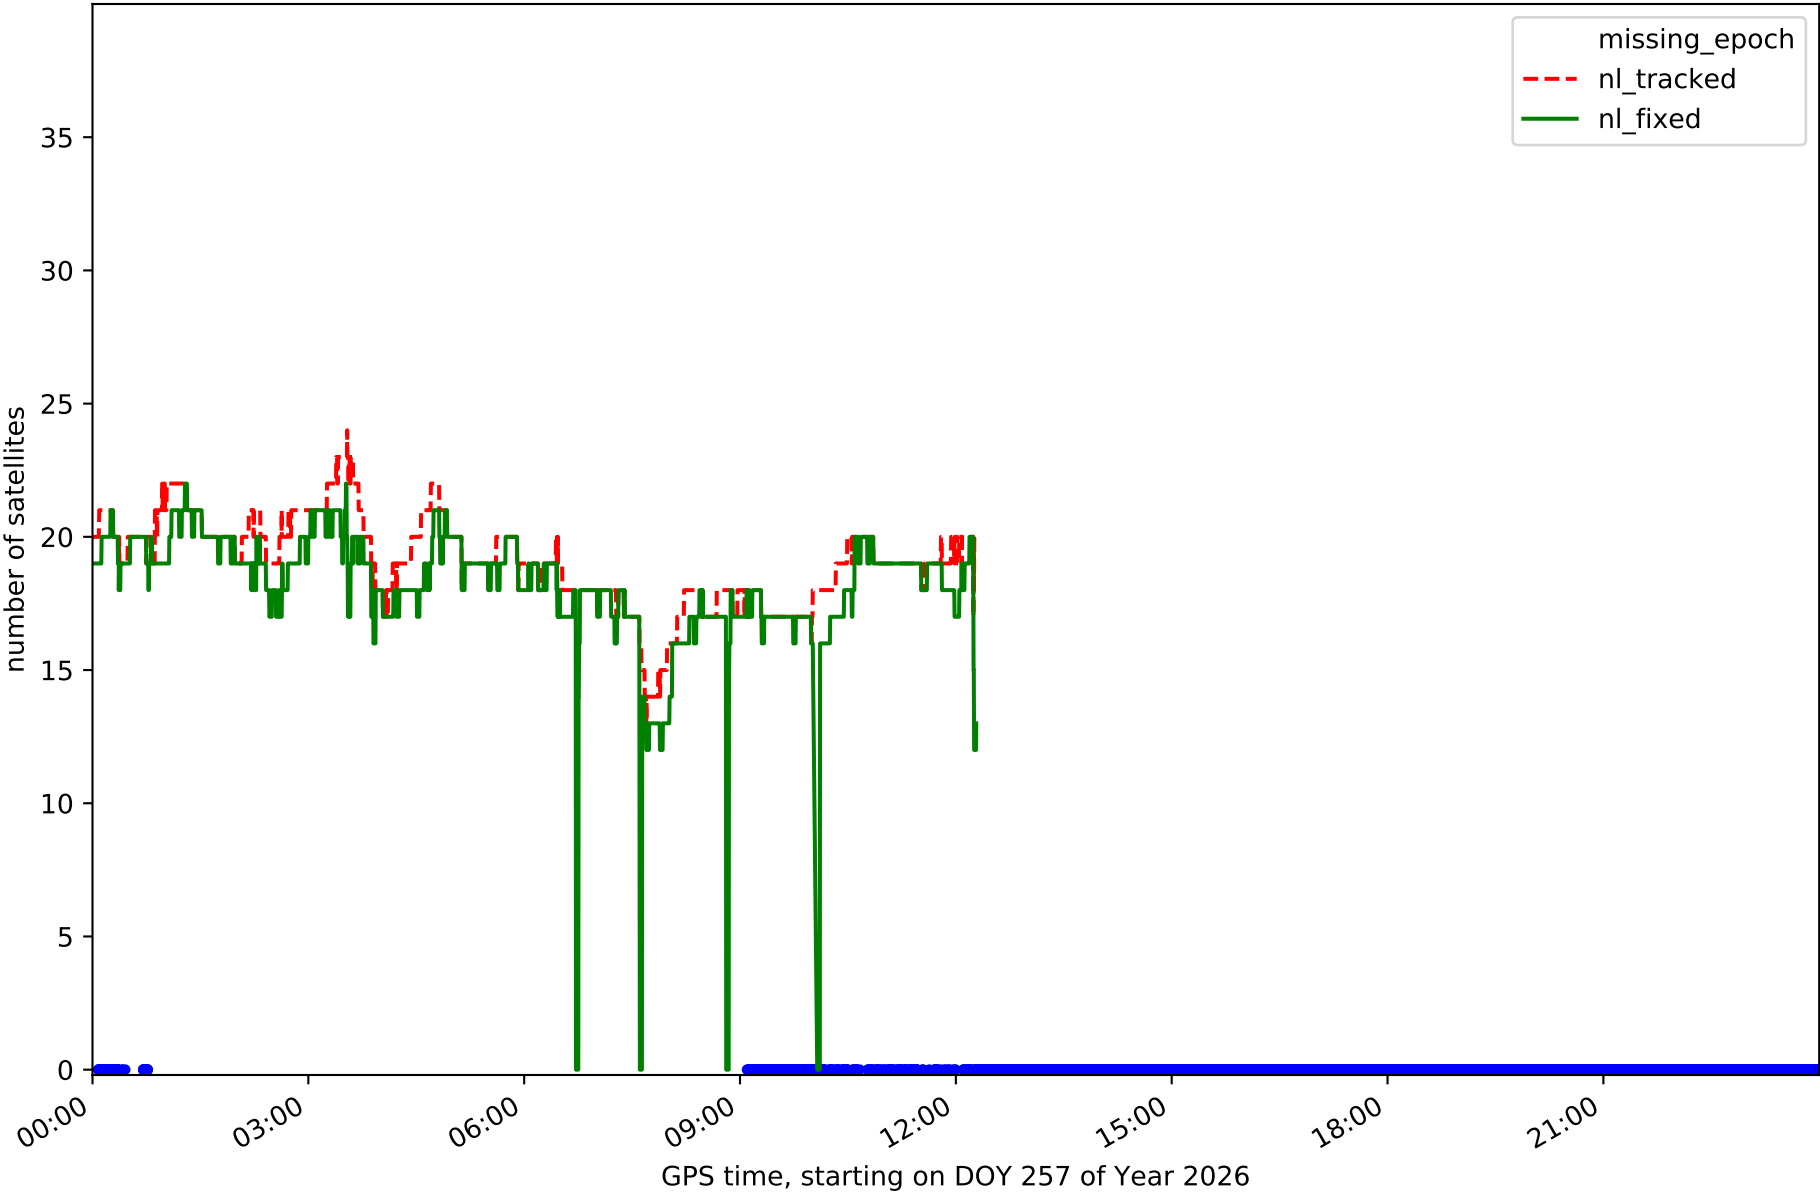


RefCheck for station EH01 in network NT32

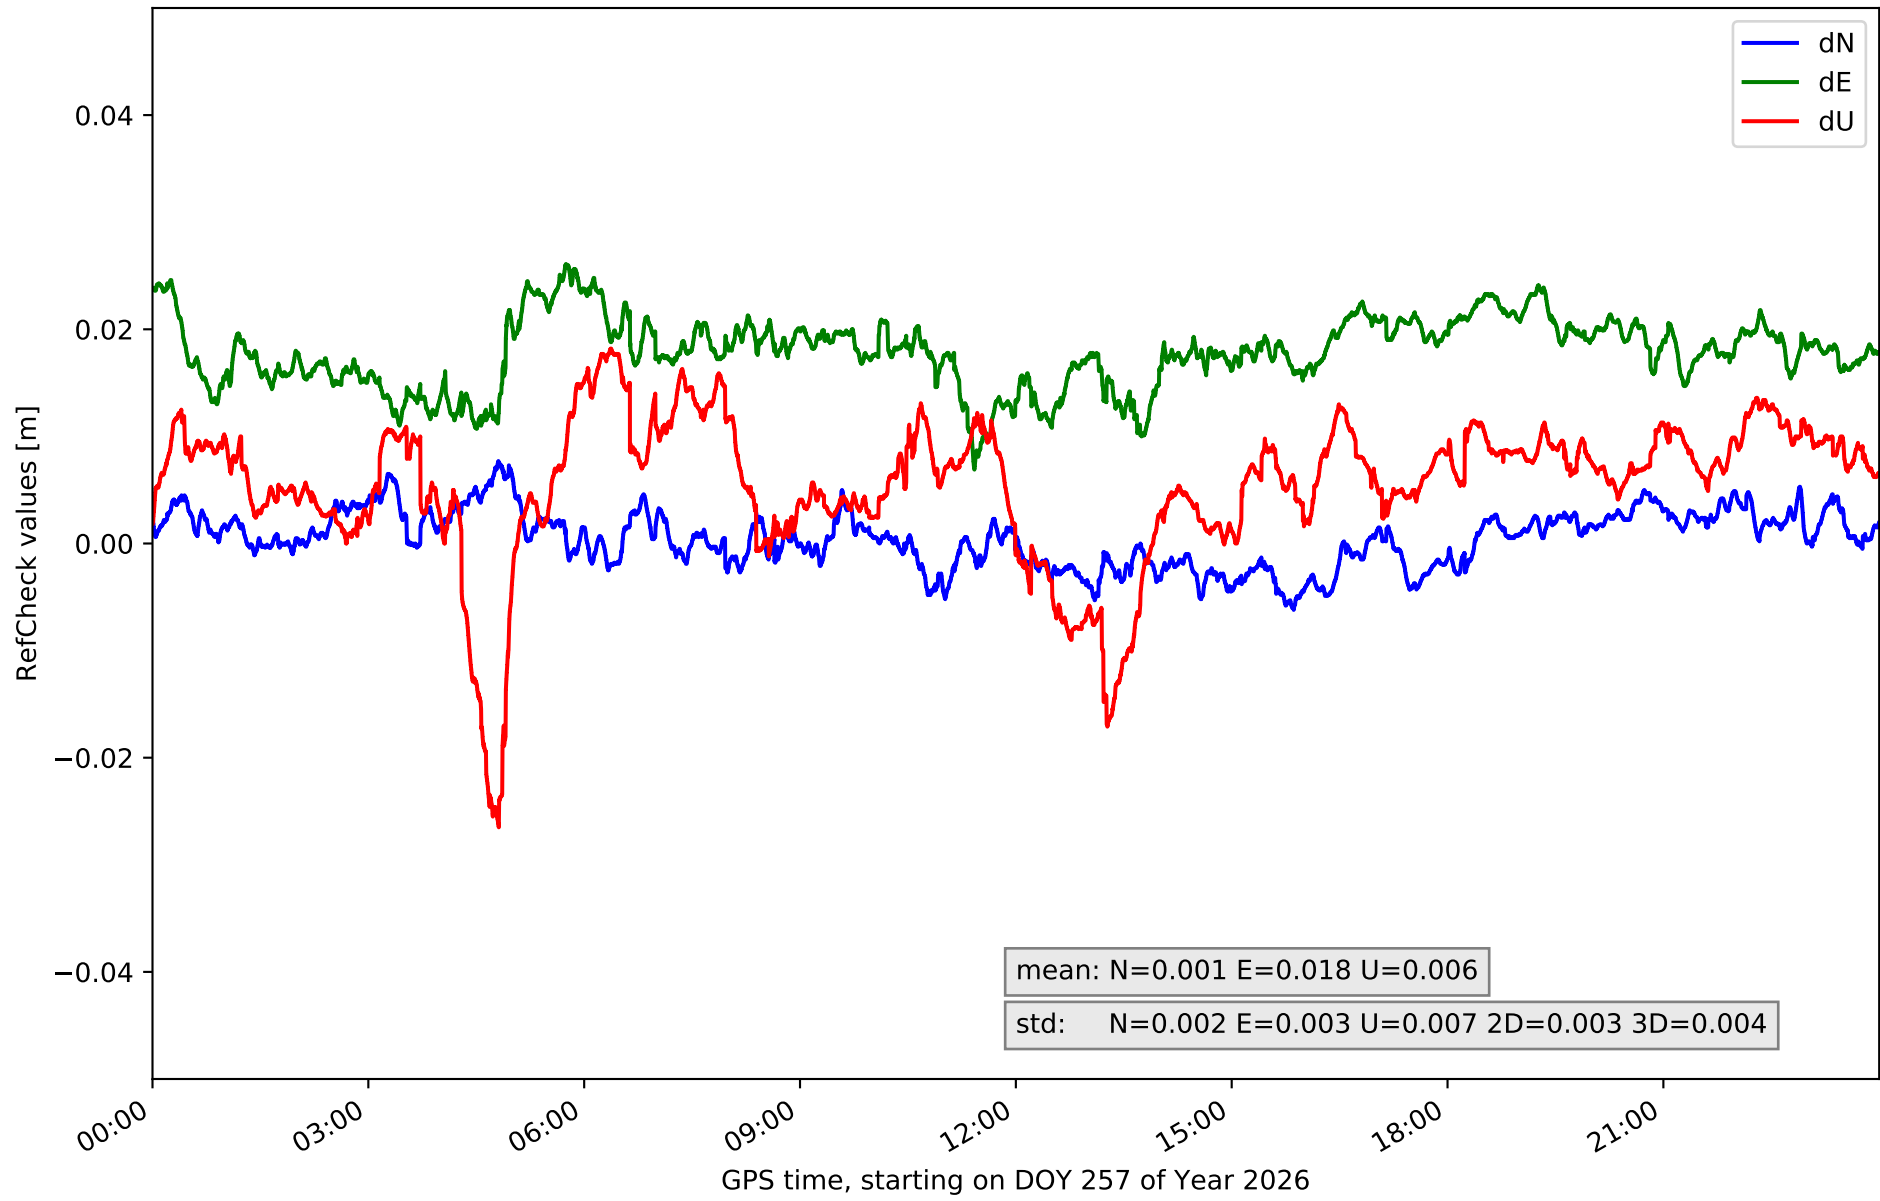


RefCheck for station EH02 in network NT32

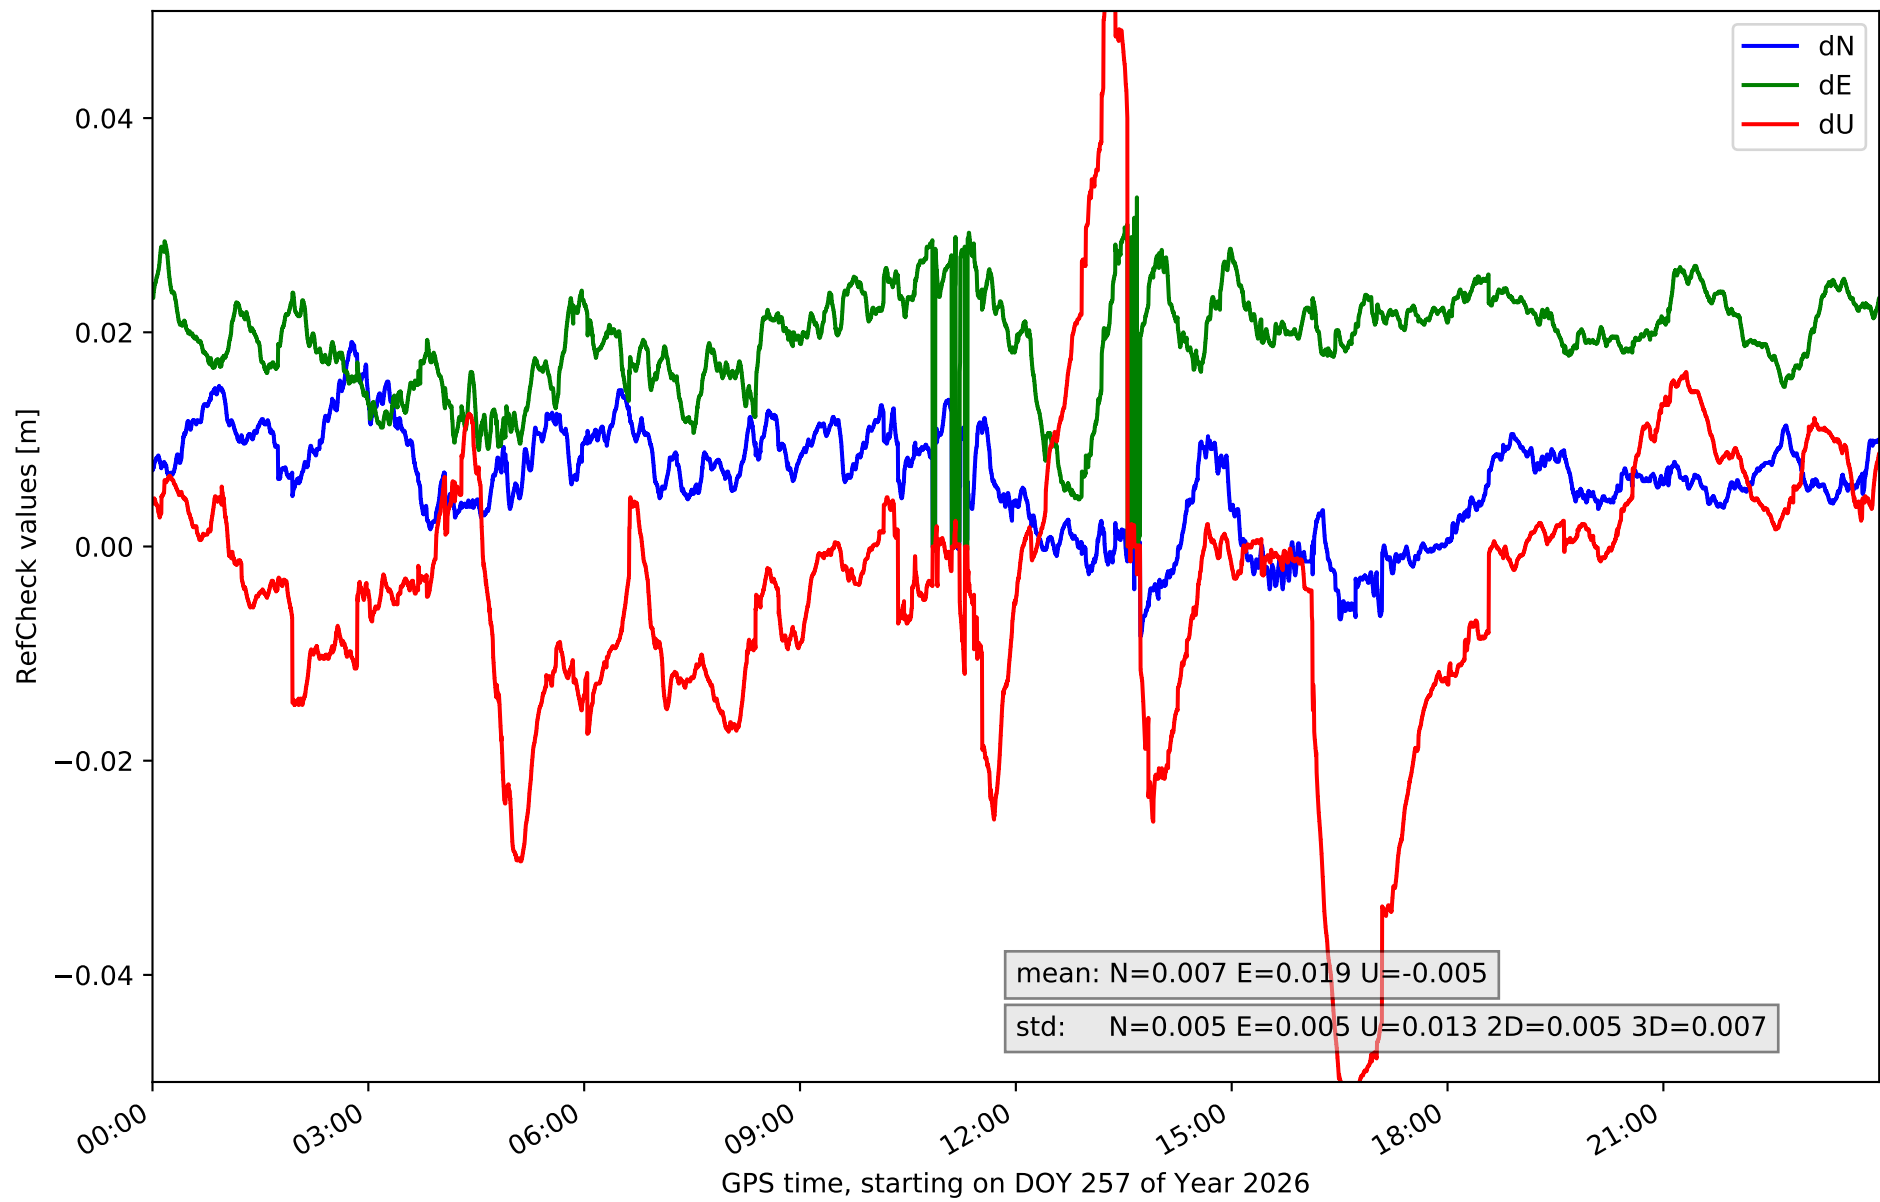


RefCheck for station GOM1 in network NT32

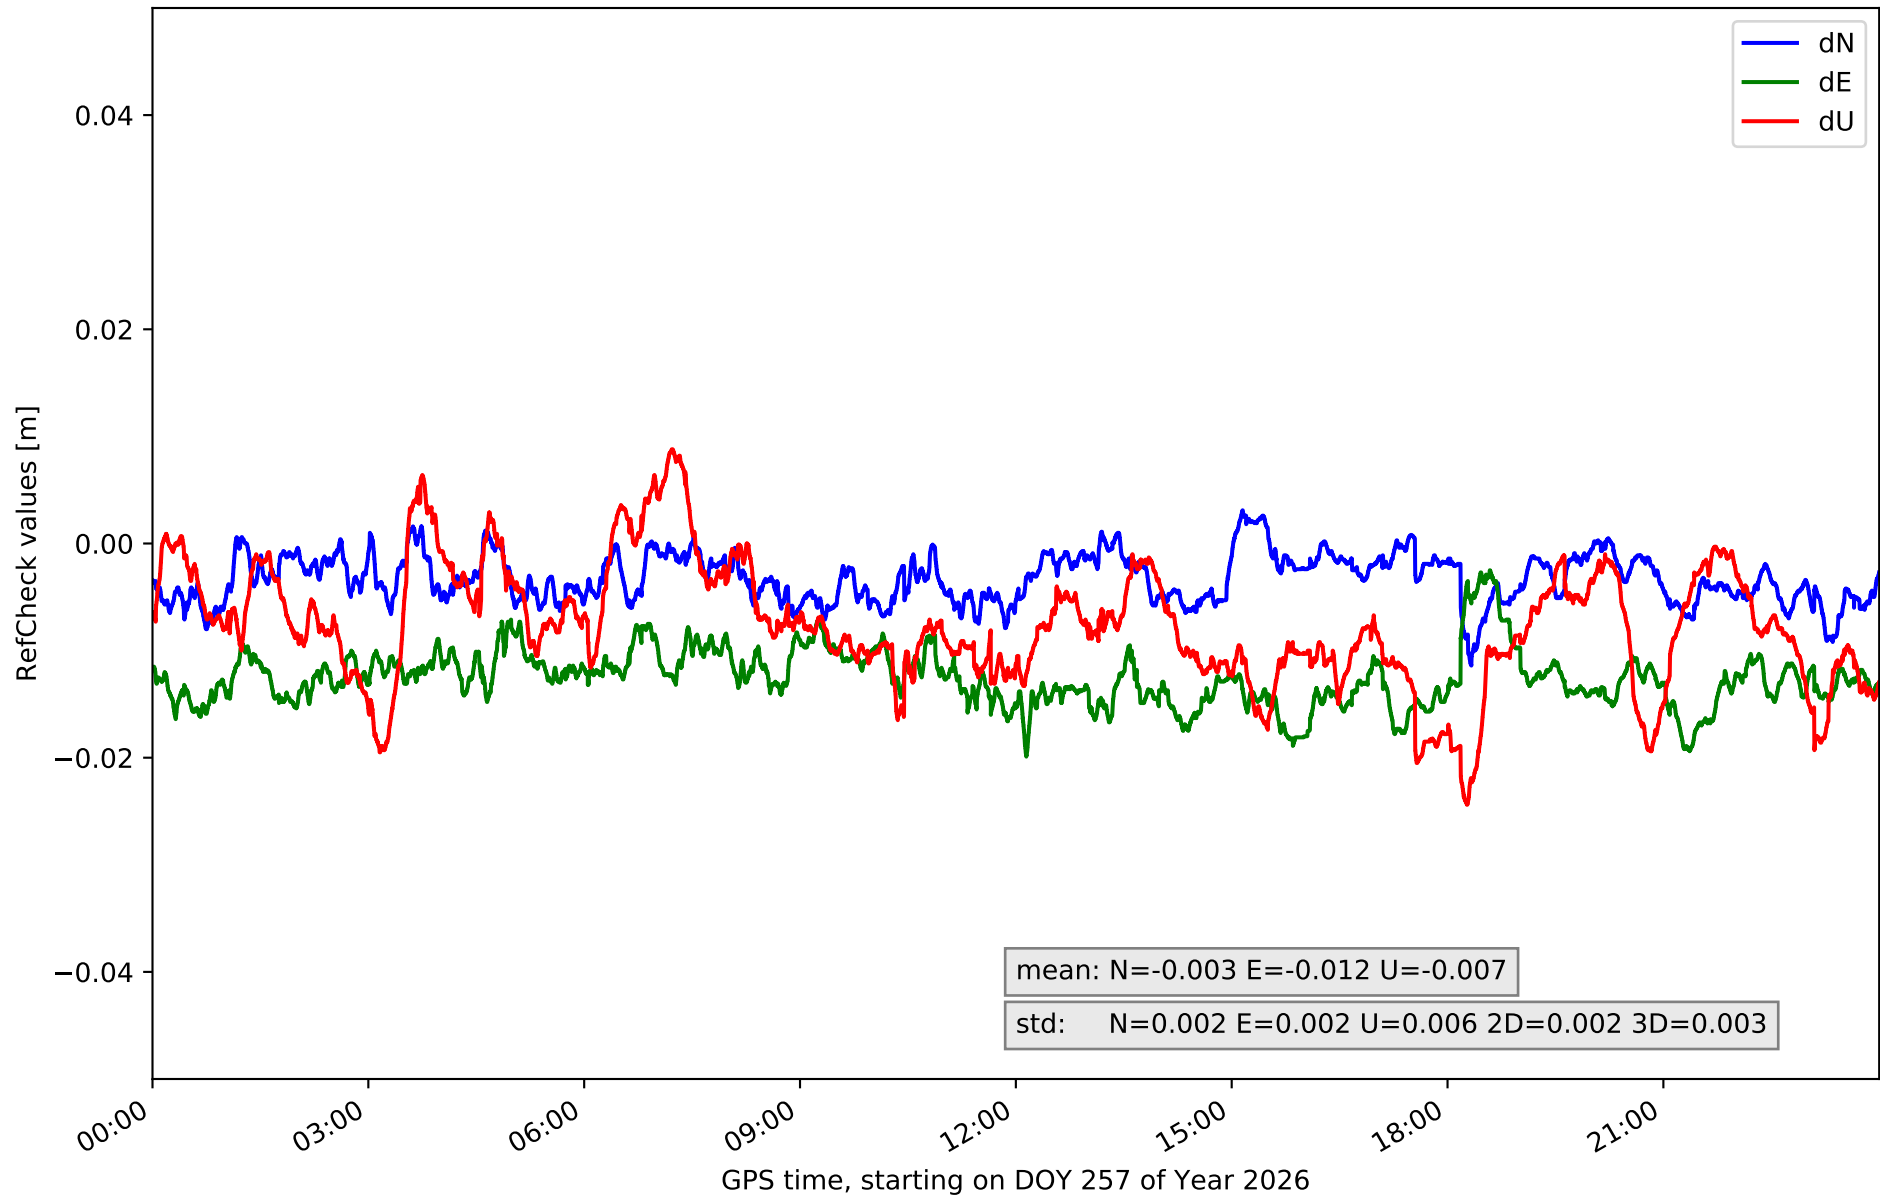


RefCheck for station GOME in network NT32

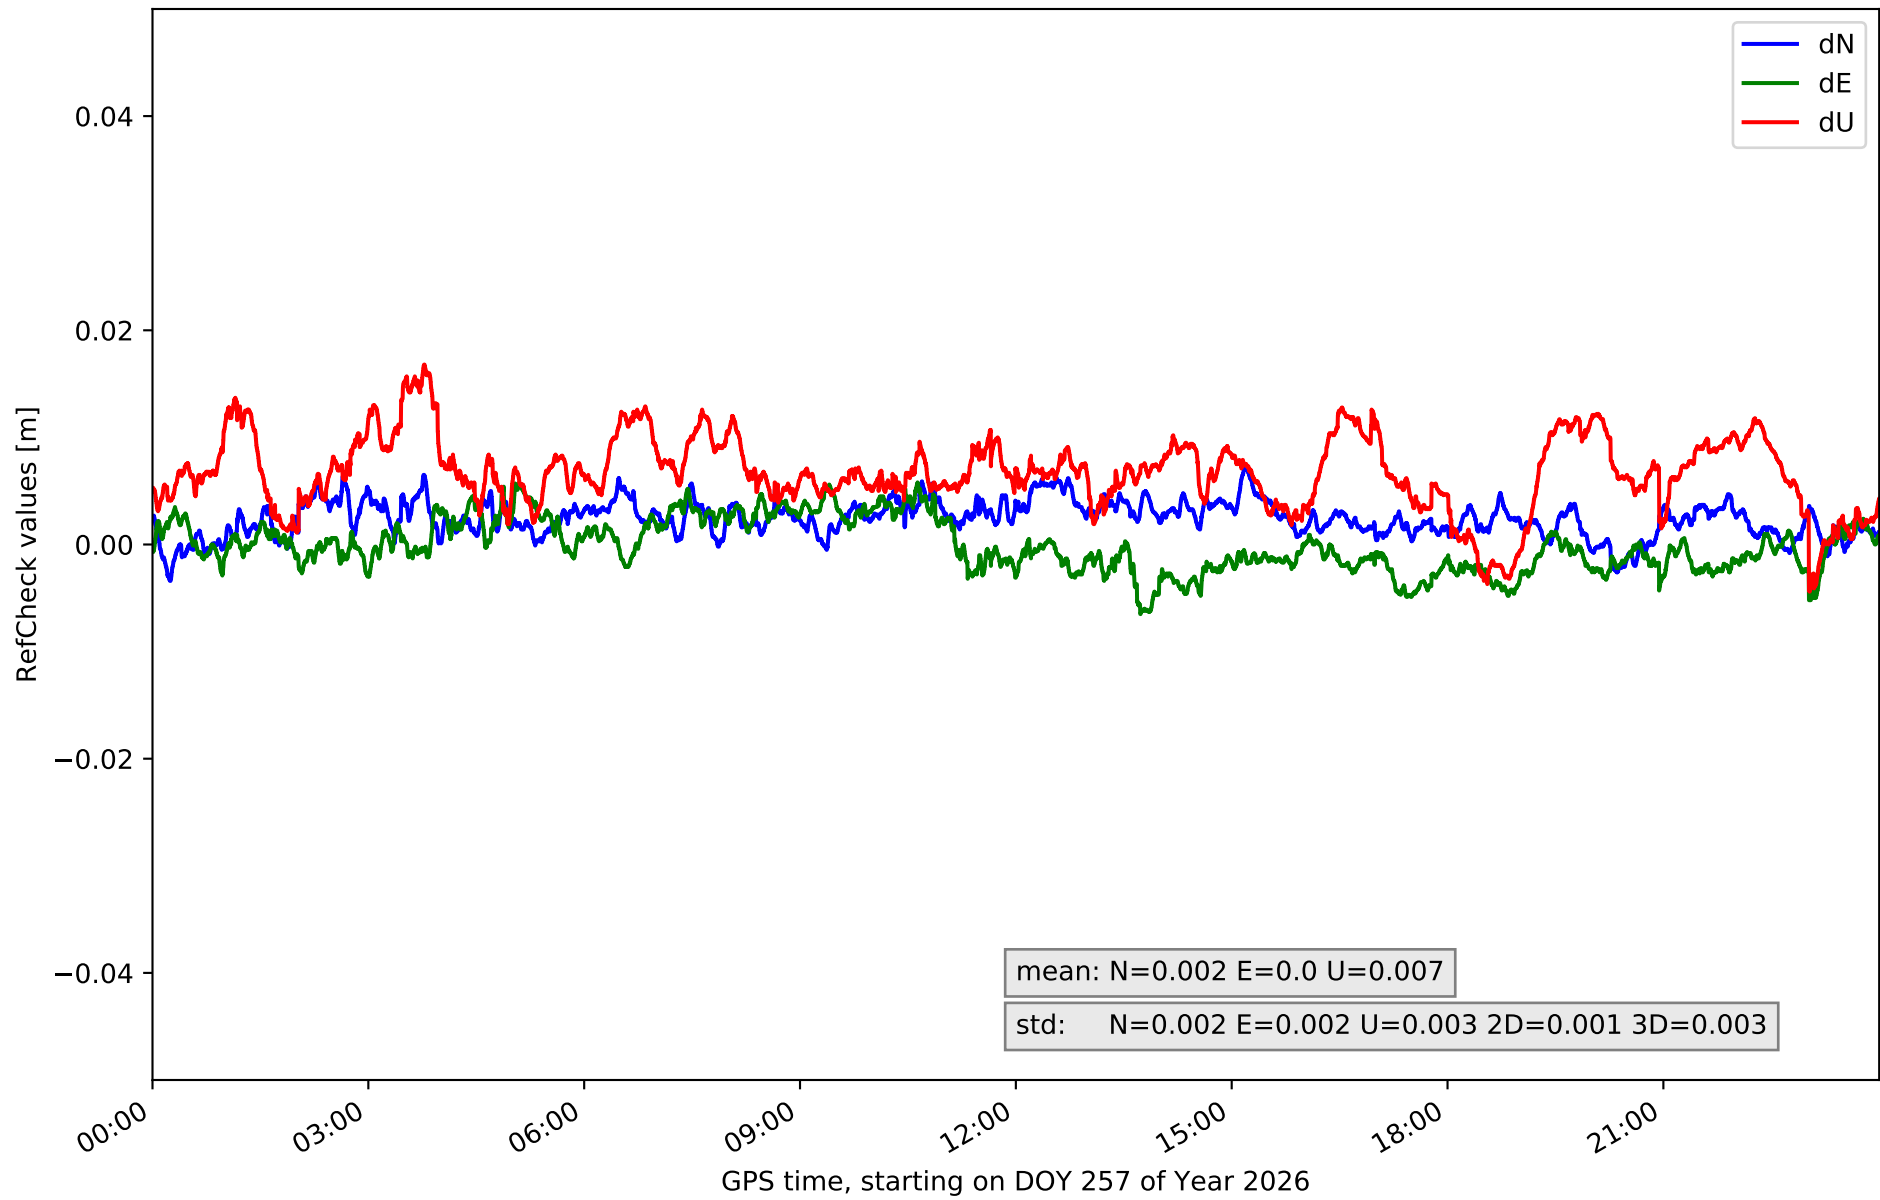


RefCheck for station IZAN in network NT32

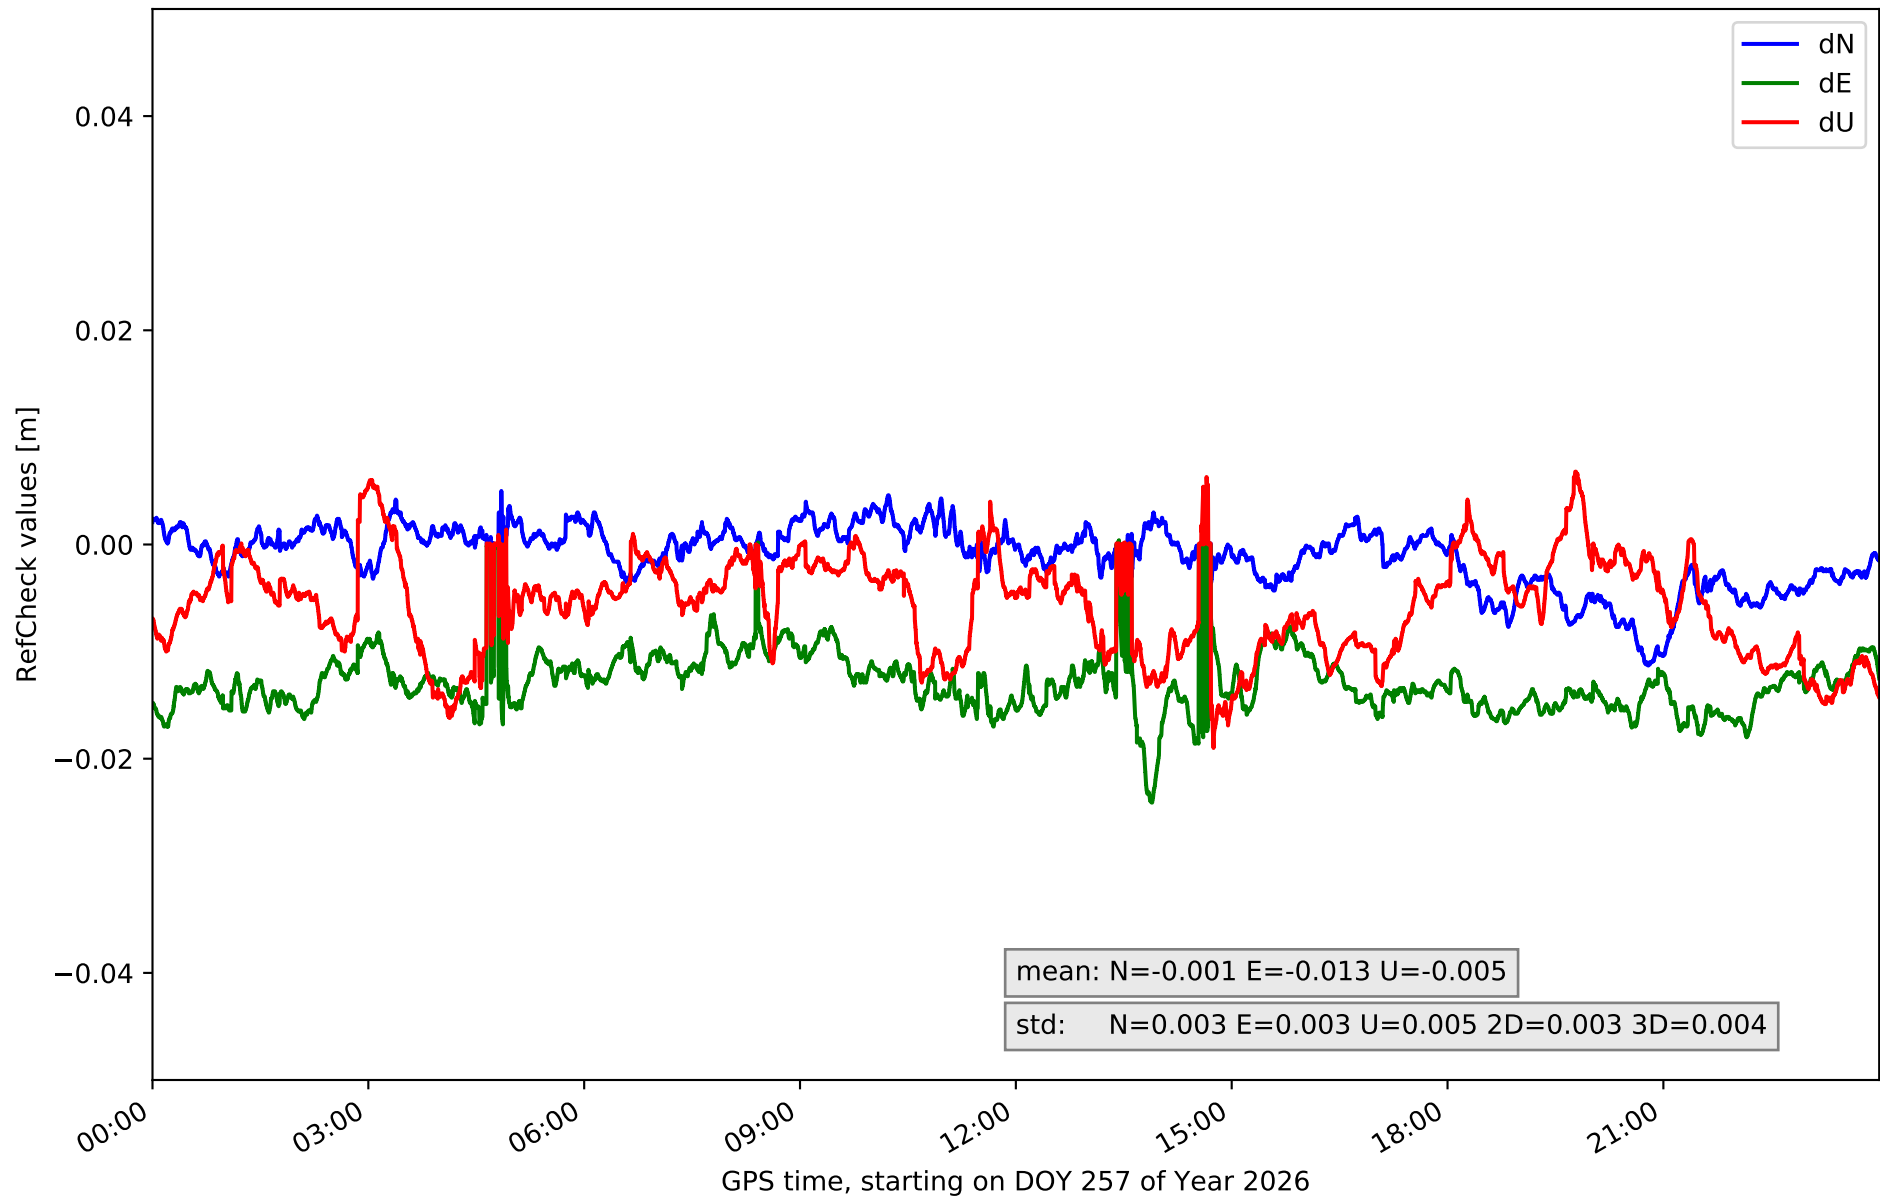


RefCheck for station LP01 in network NT32

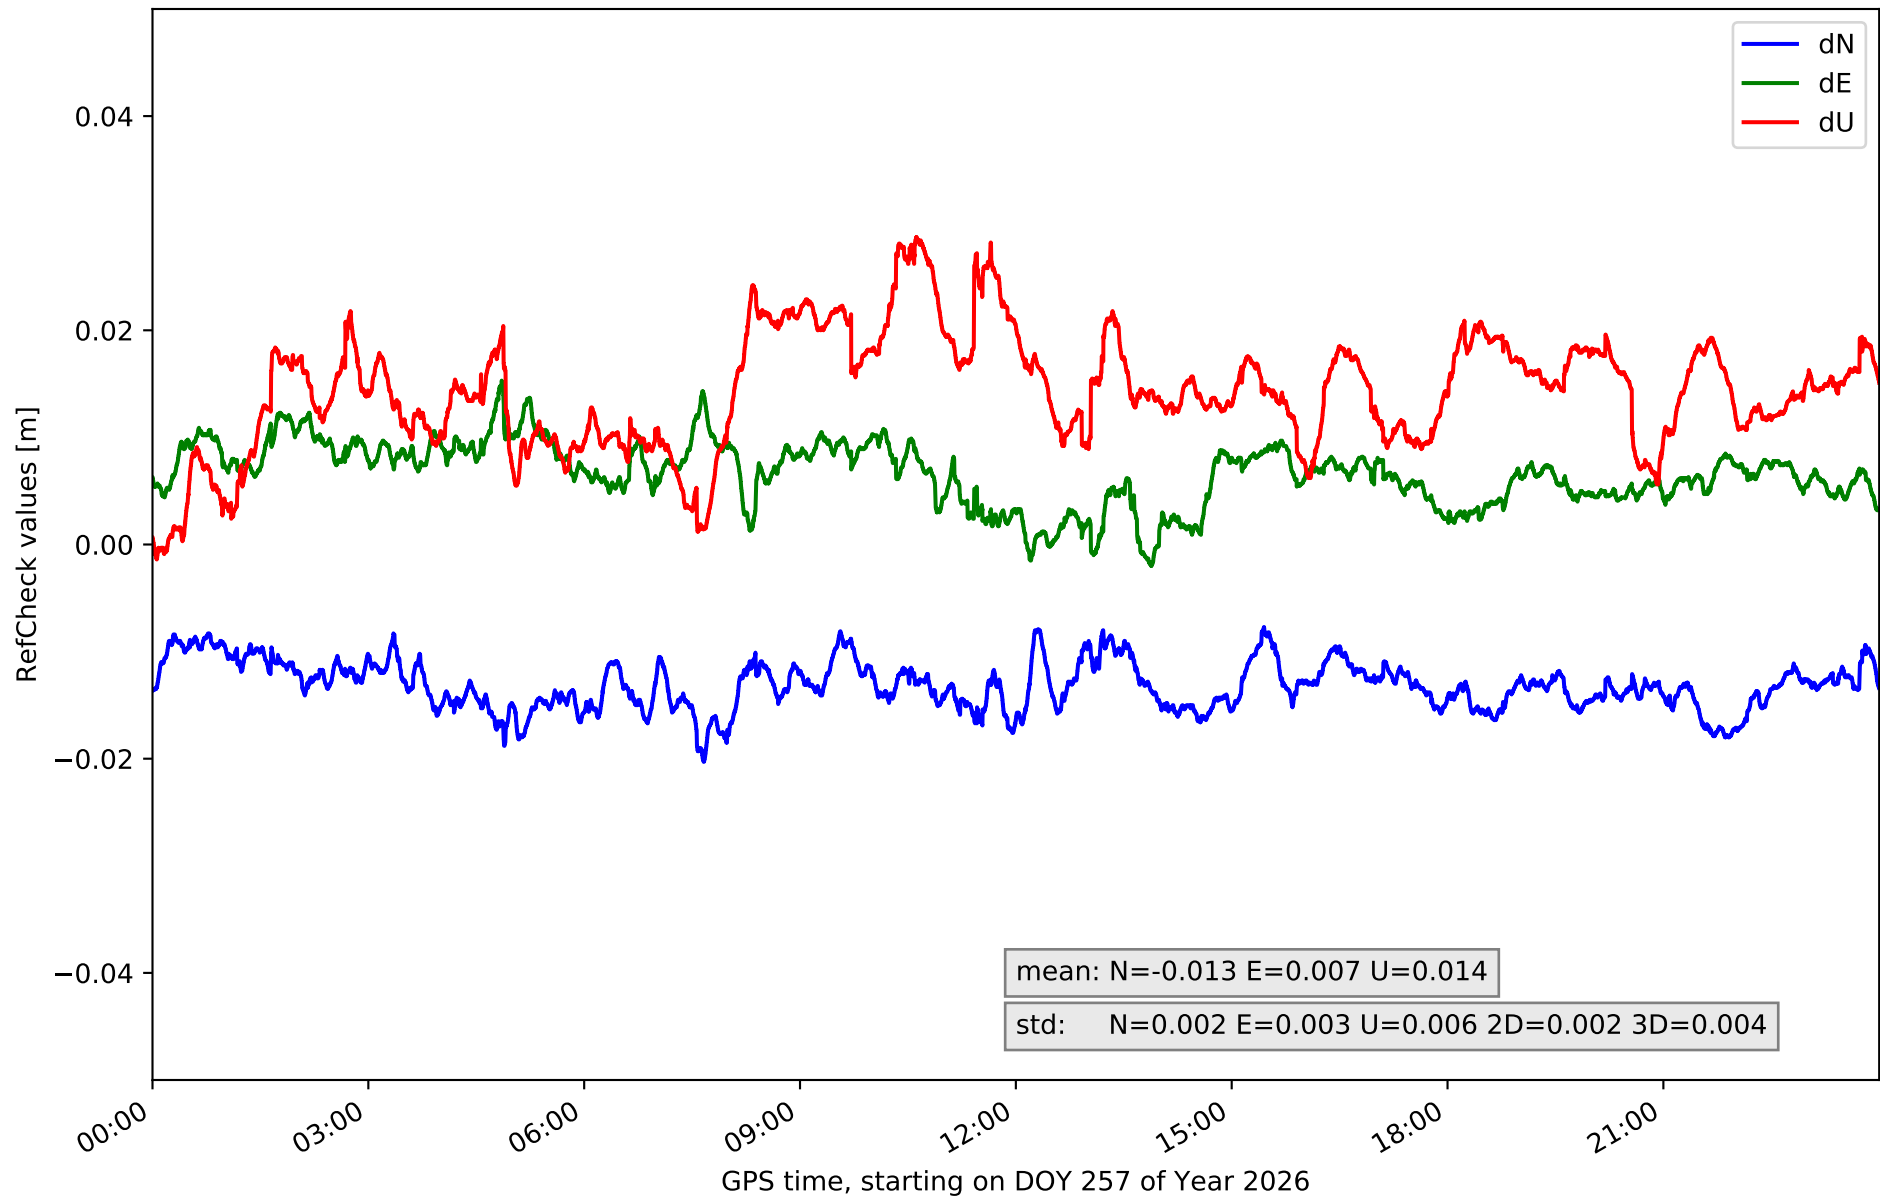


RefCheck for station LP03 in network NT32

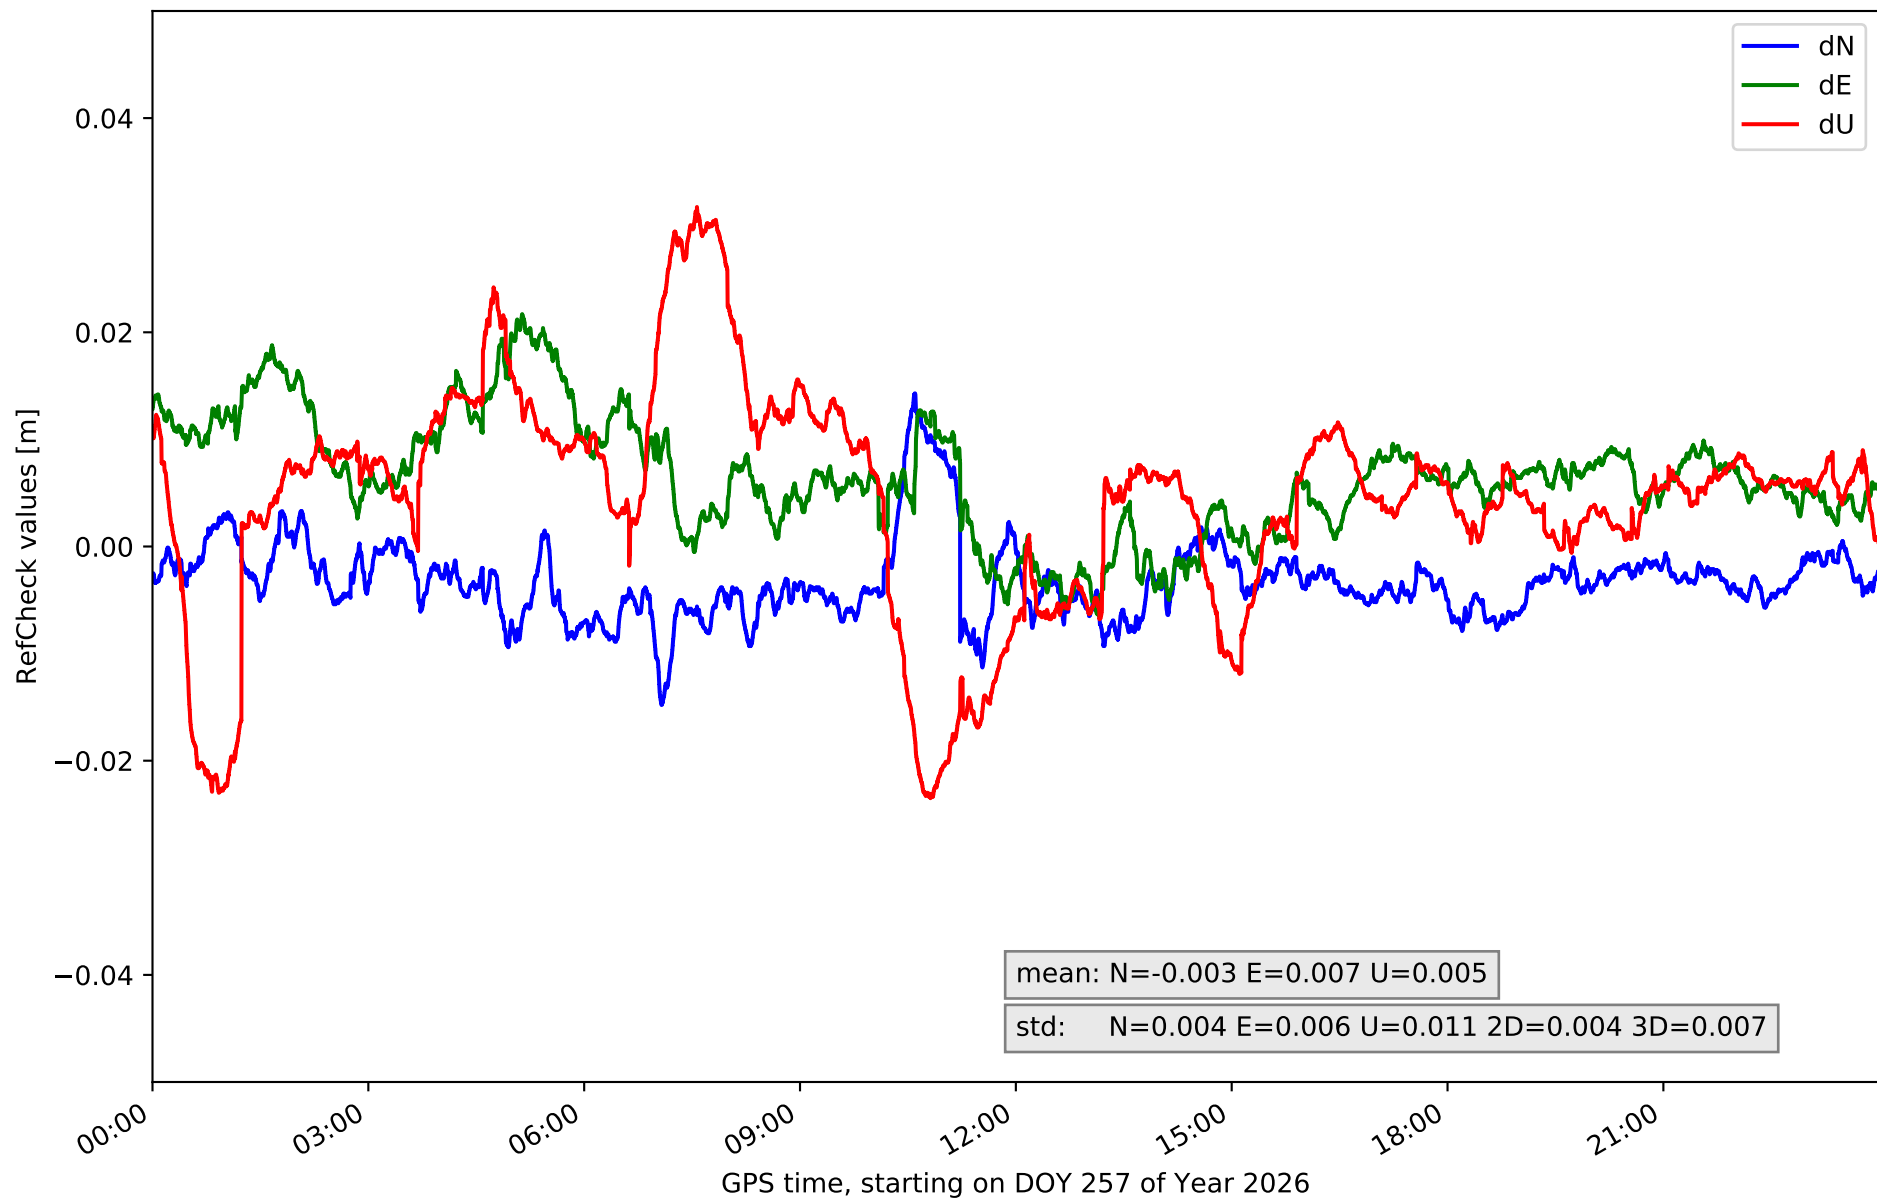


RefCheck for station LPAL in network NT32

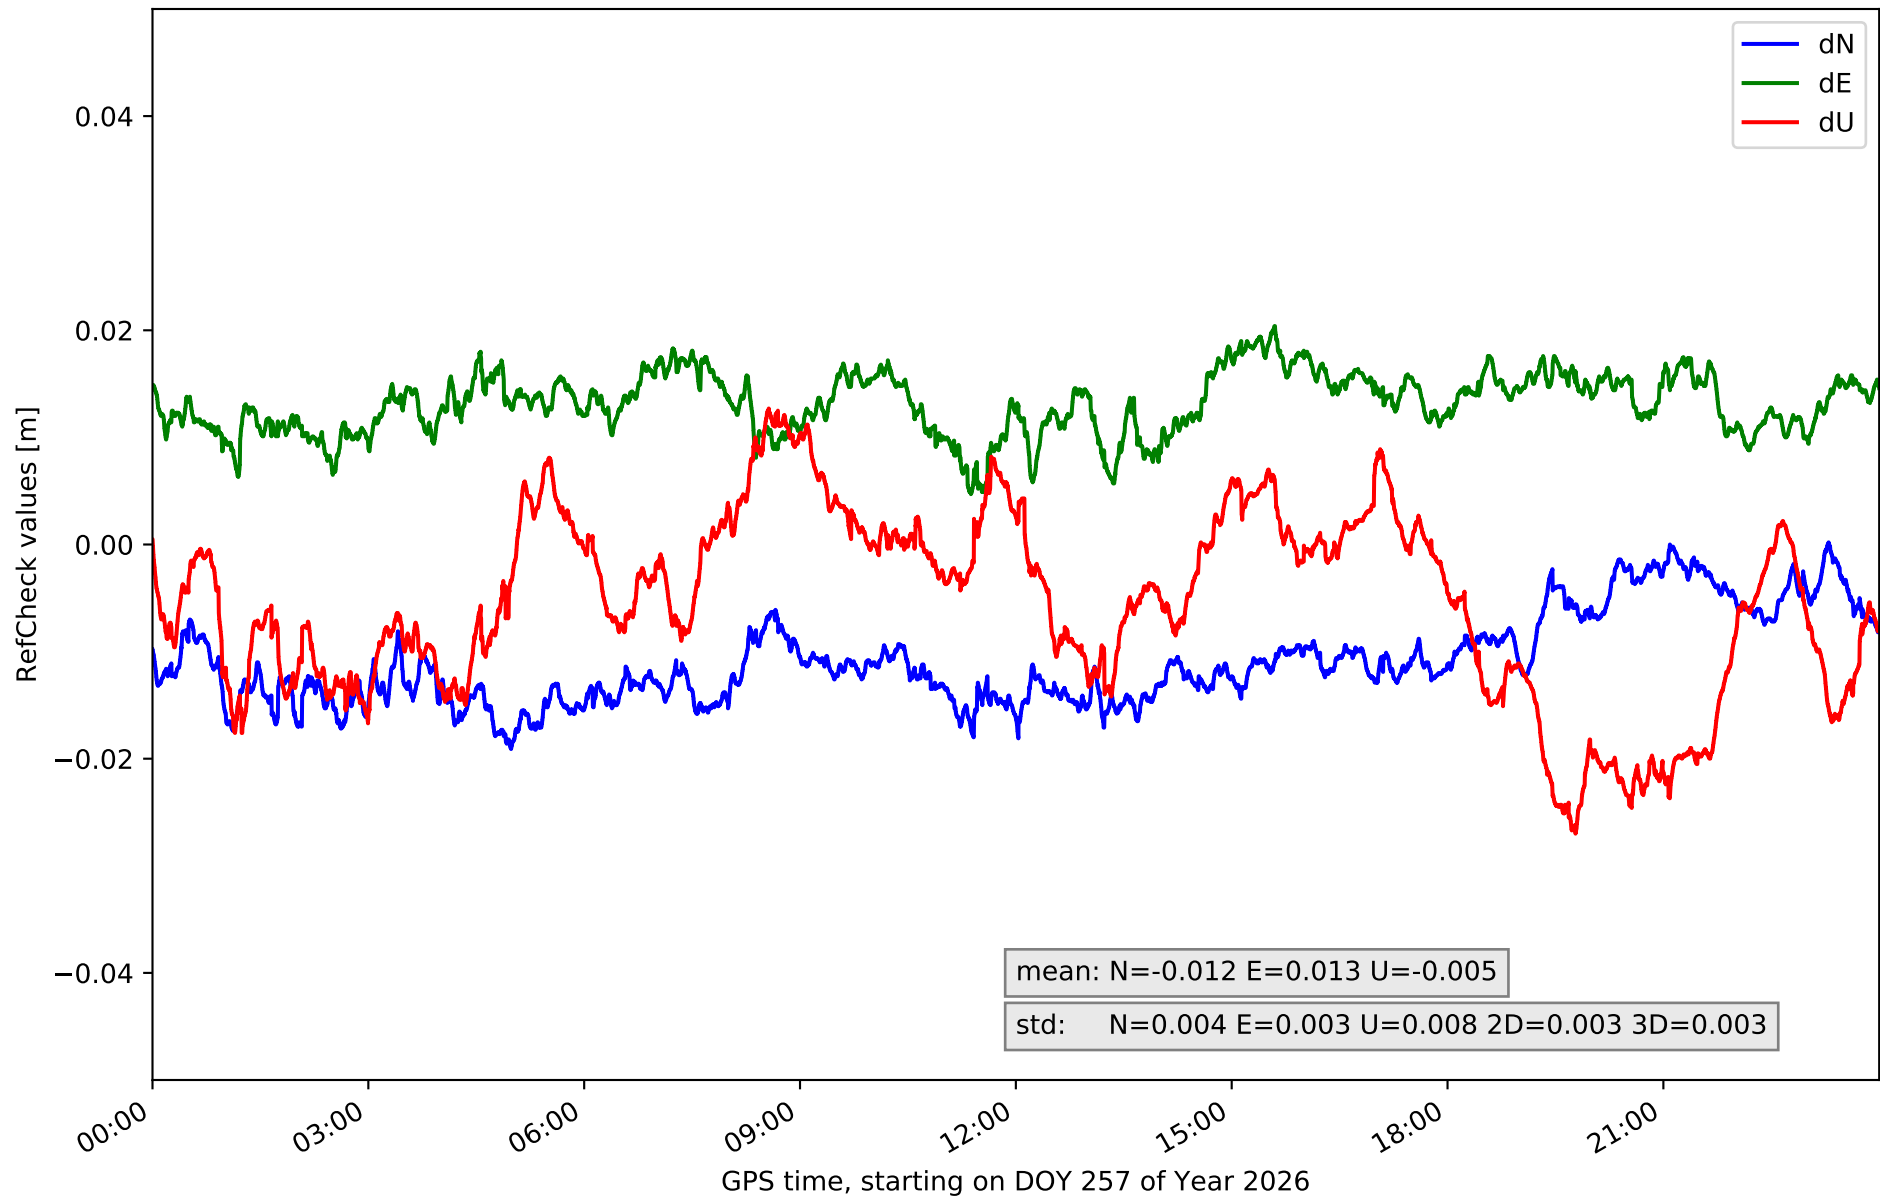


RefCheck for station LRES in network NT32

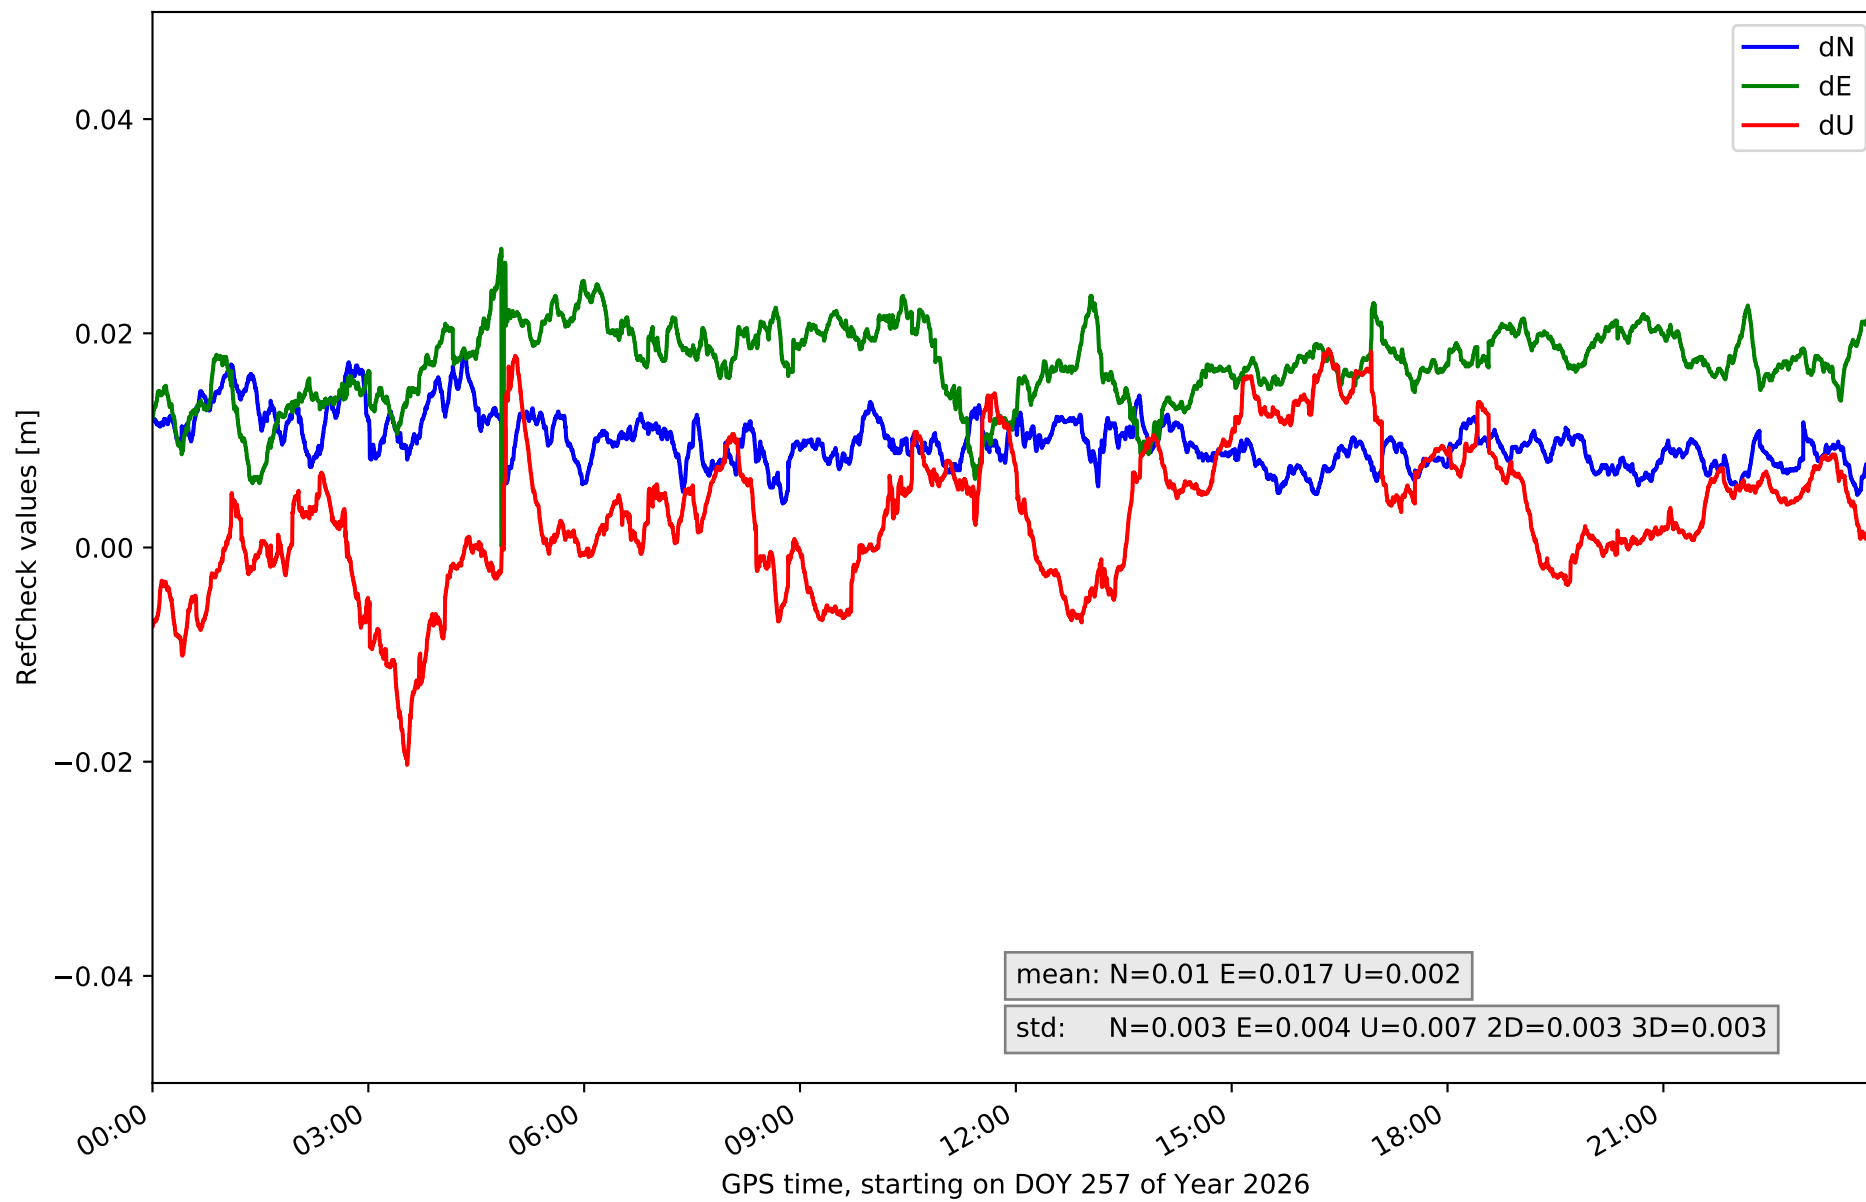


RefCheck for station TN01 in network NT32

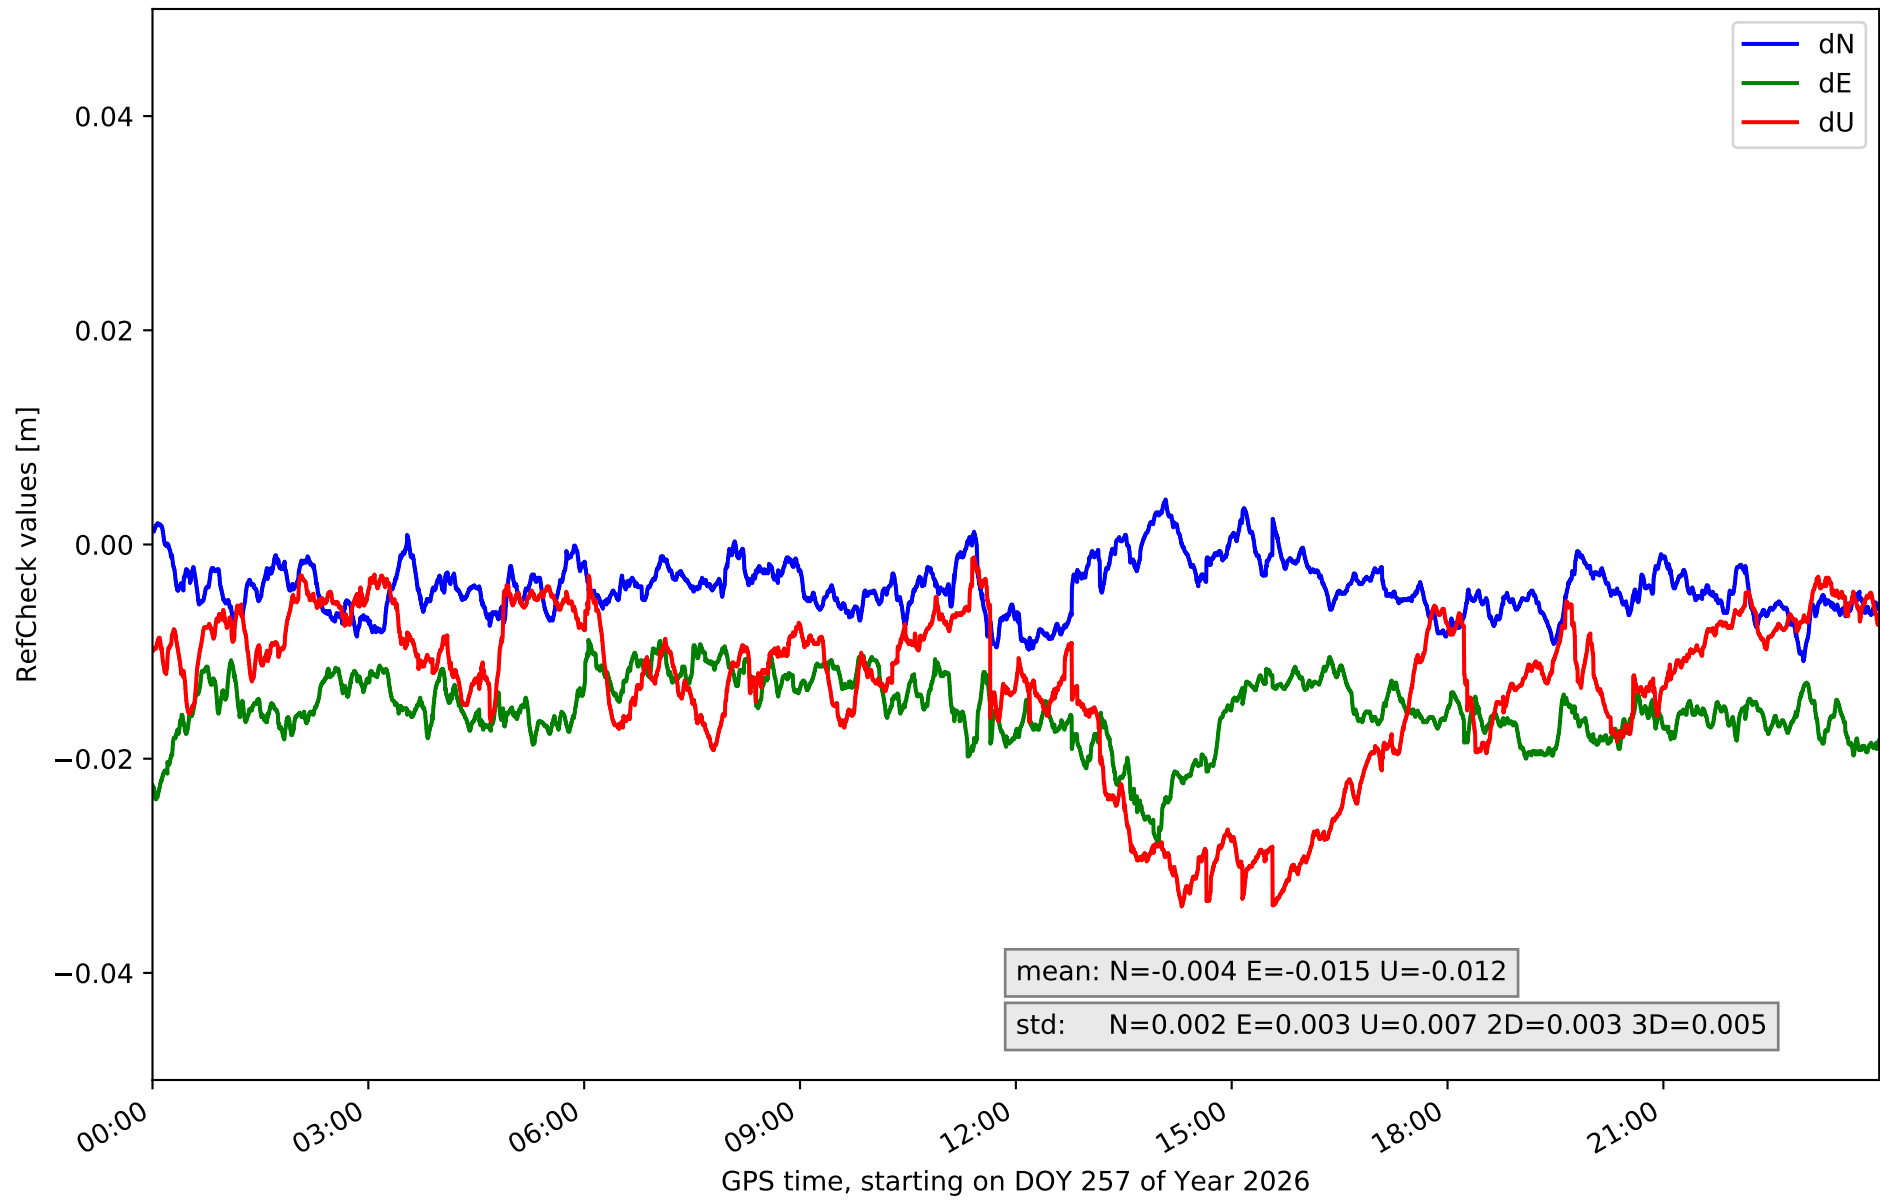


RefCheck for station TN02 in network NT32

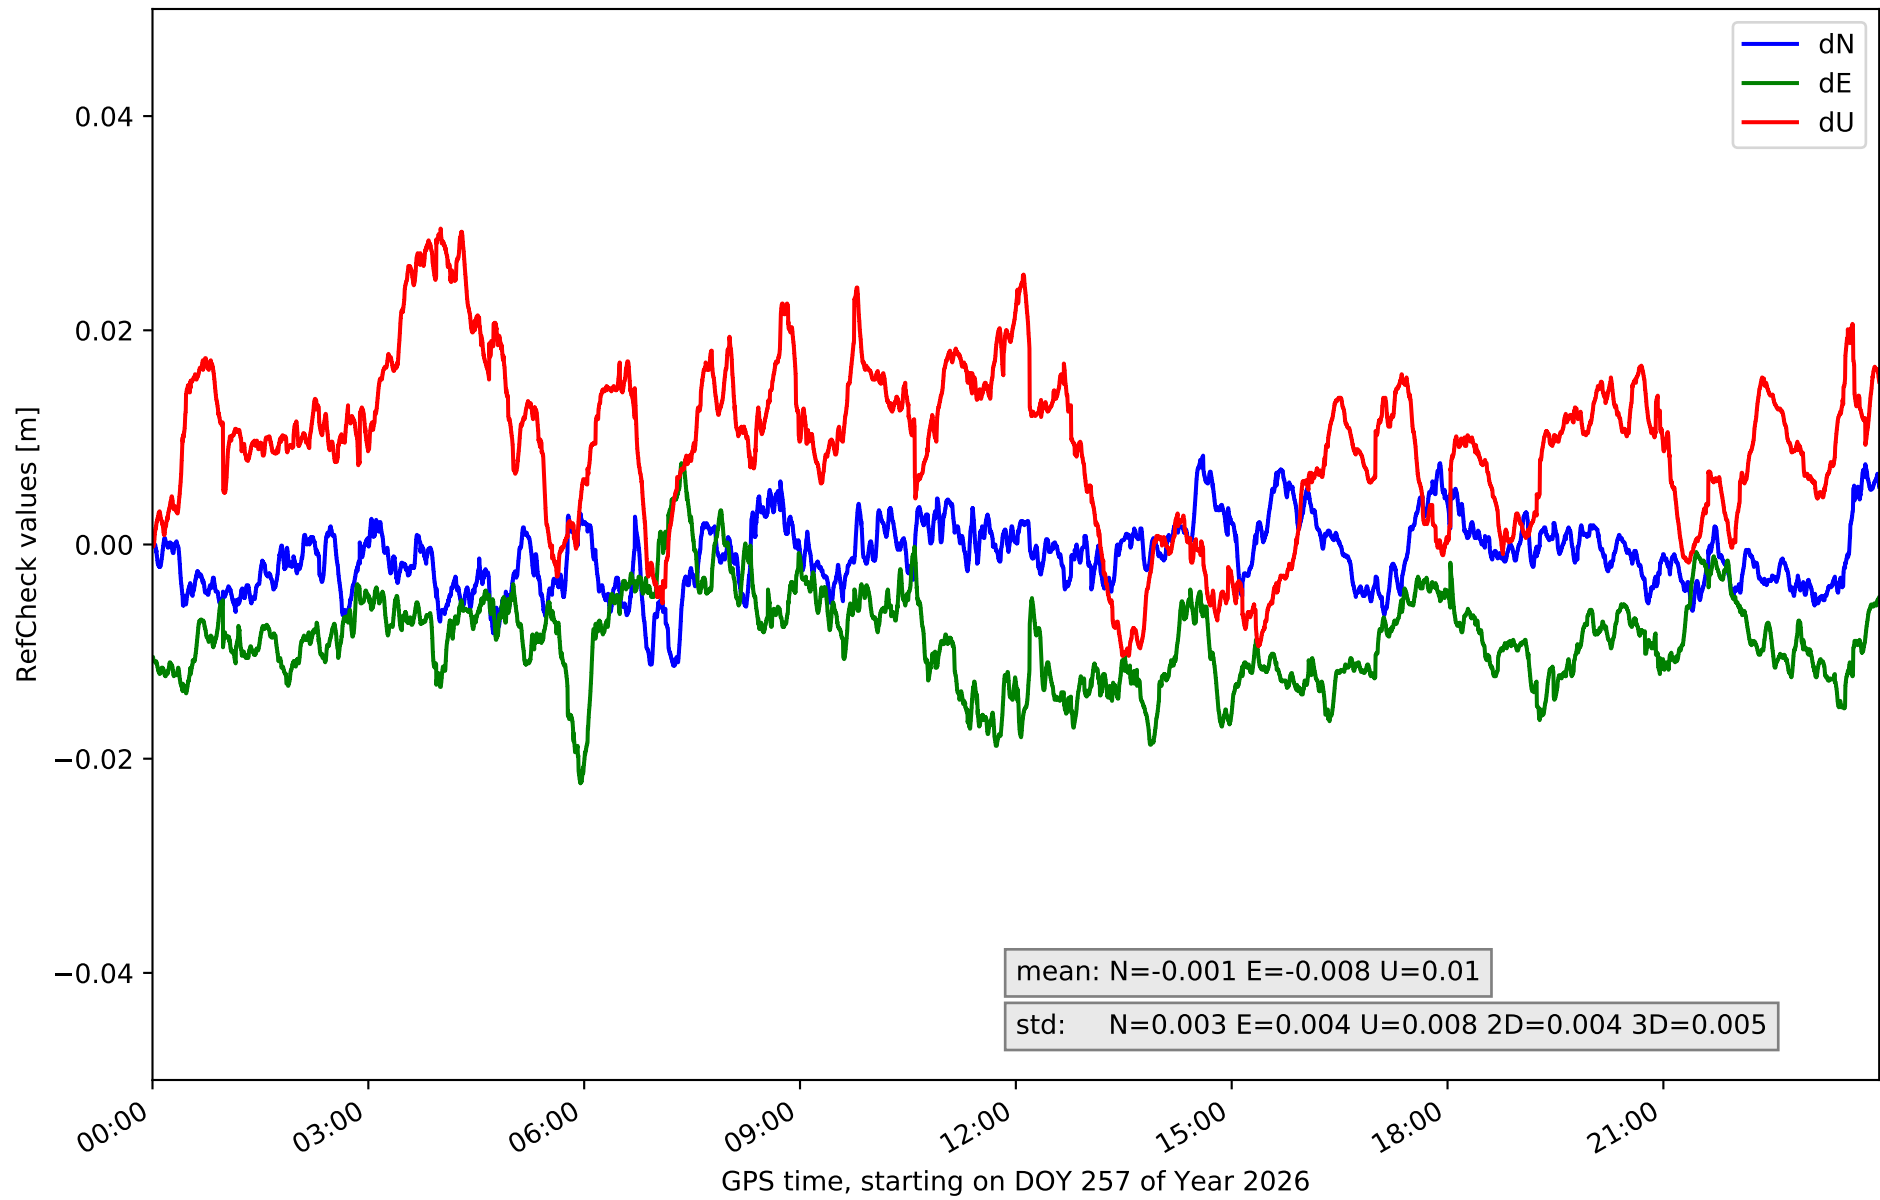


RefCheck for station TN03 in network NT32

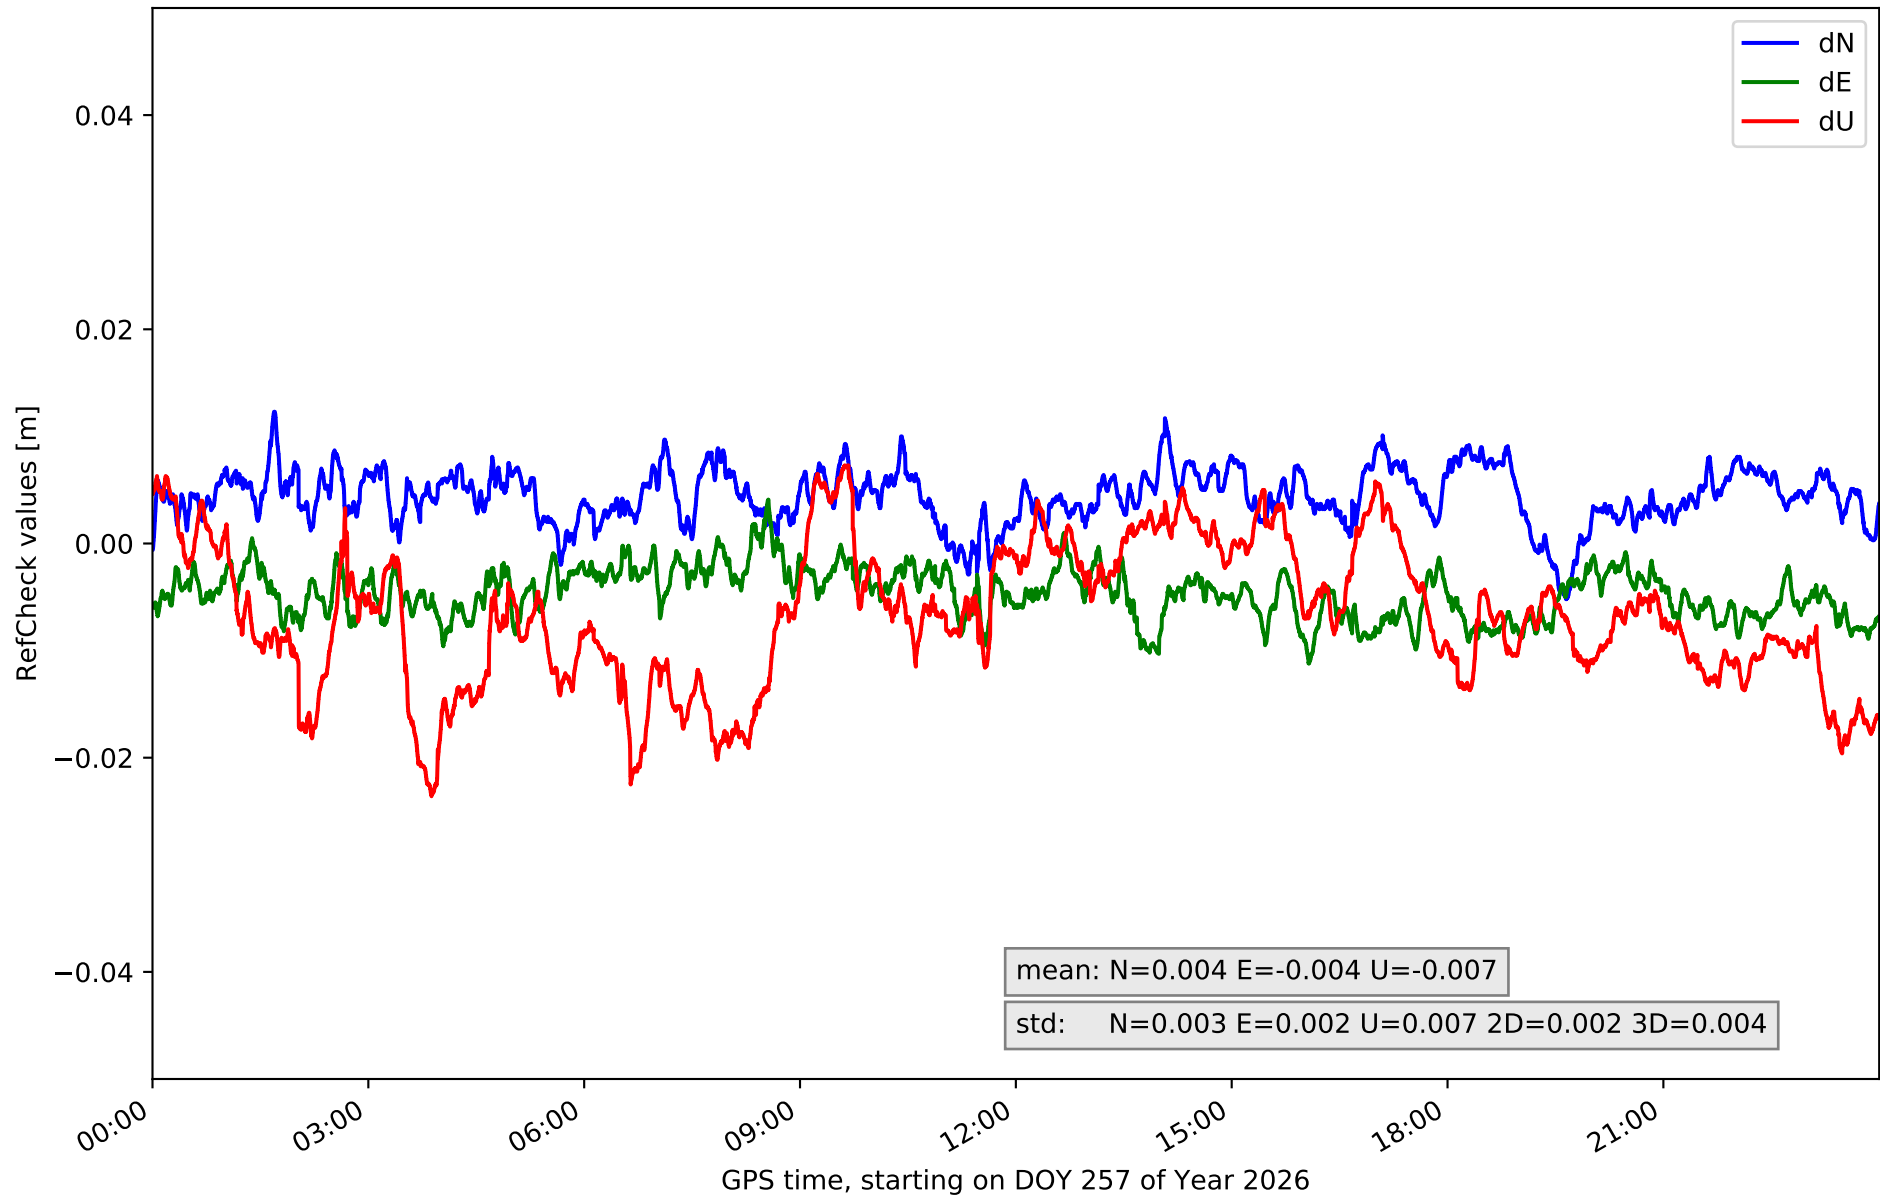


RefCheck for station TN06 in network NT32

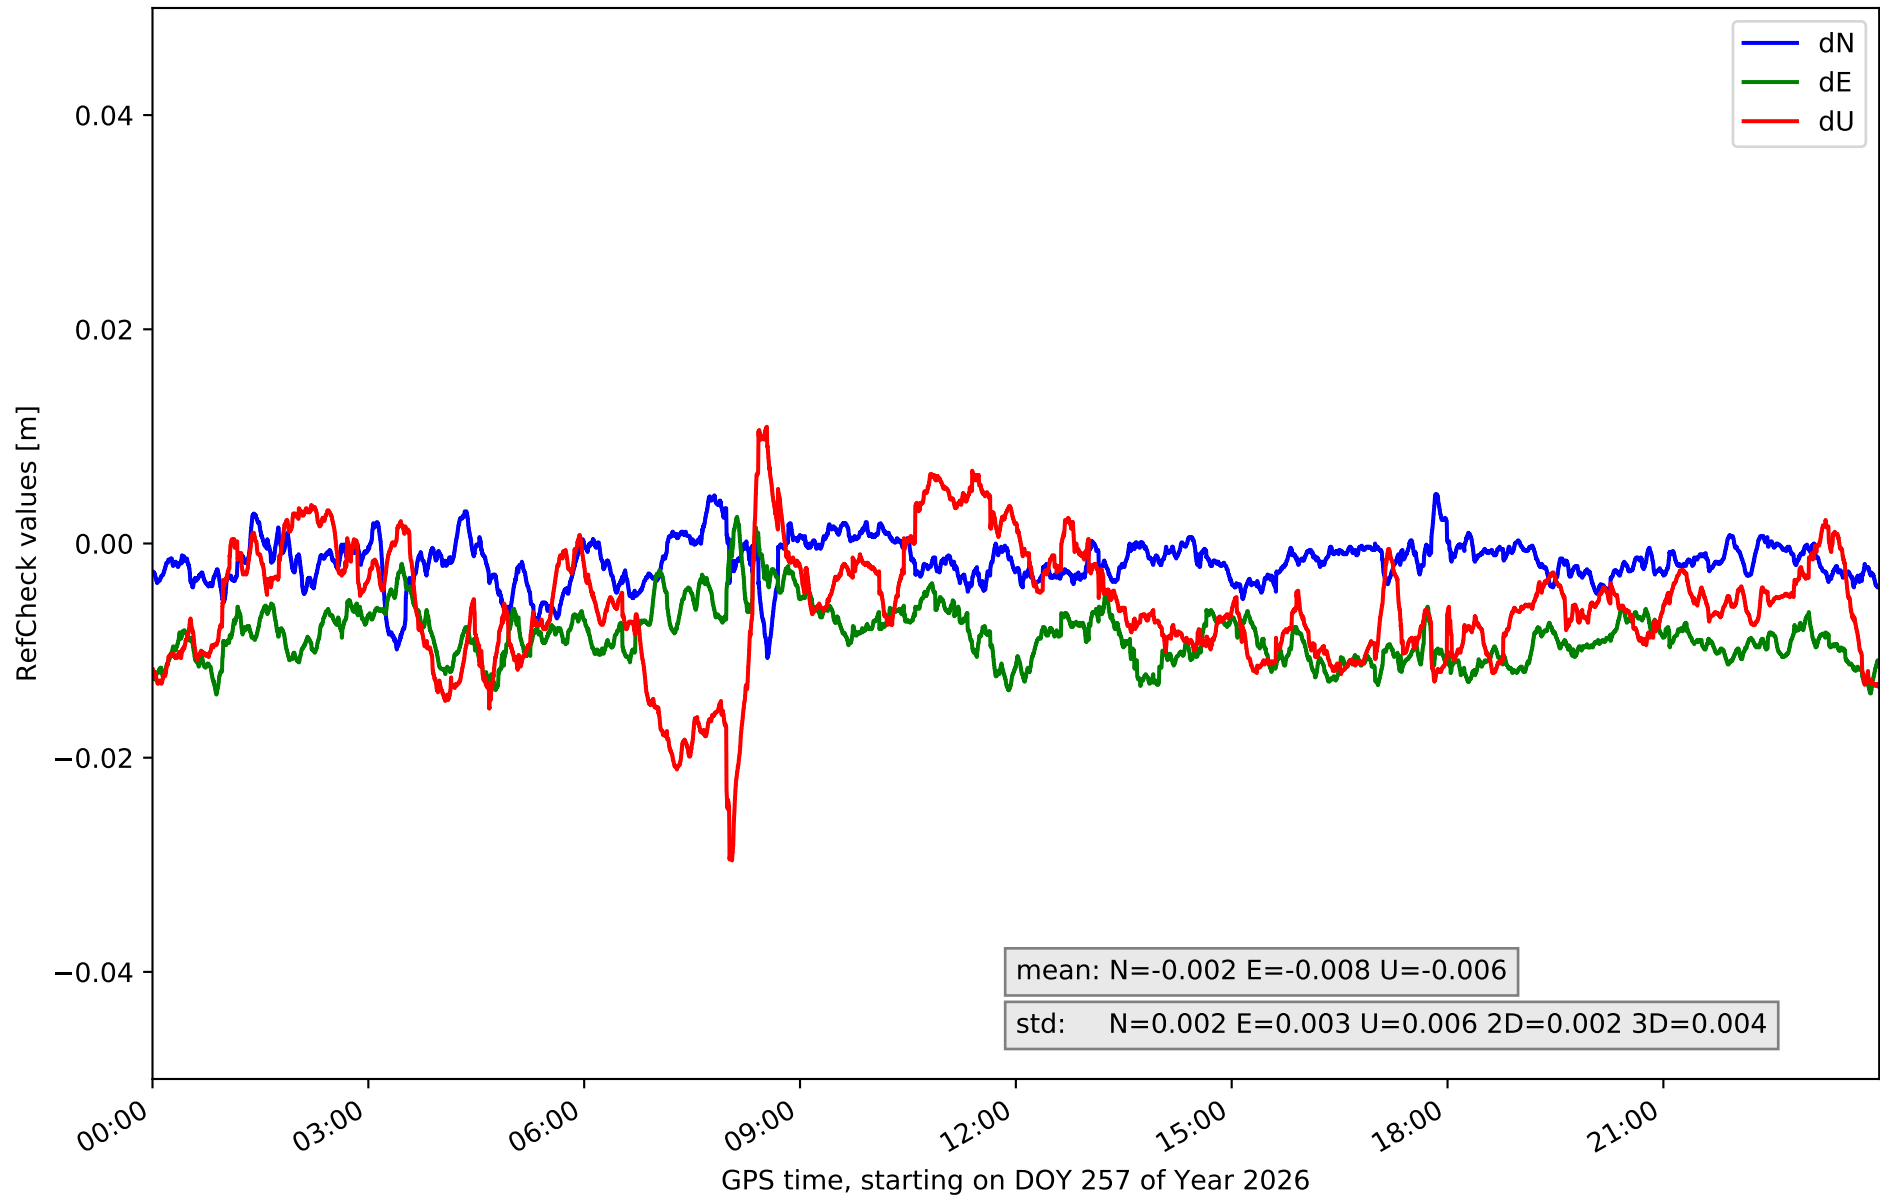

RefCheck for station TN09 in network NT32

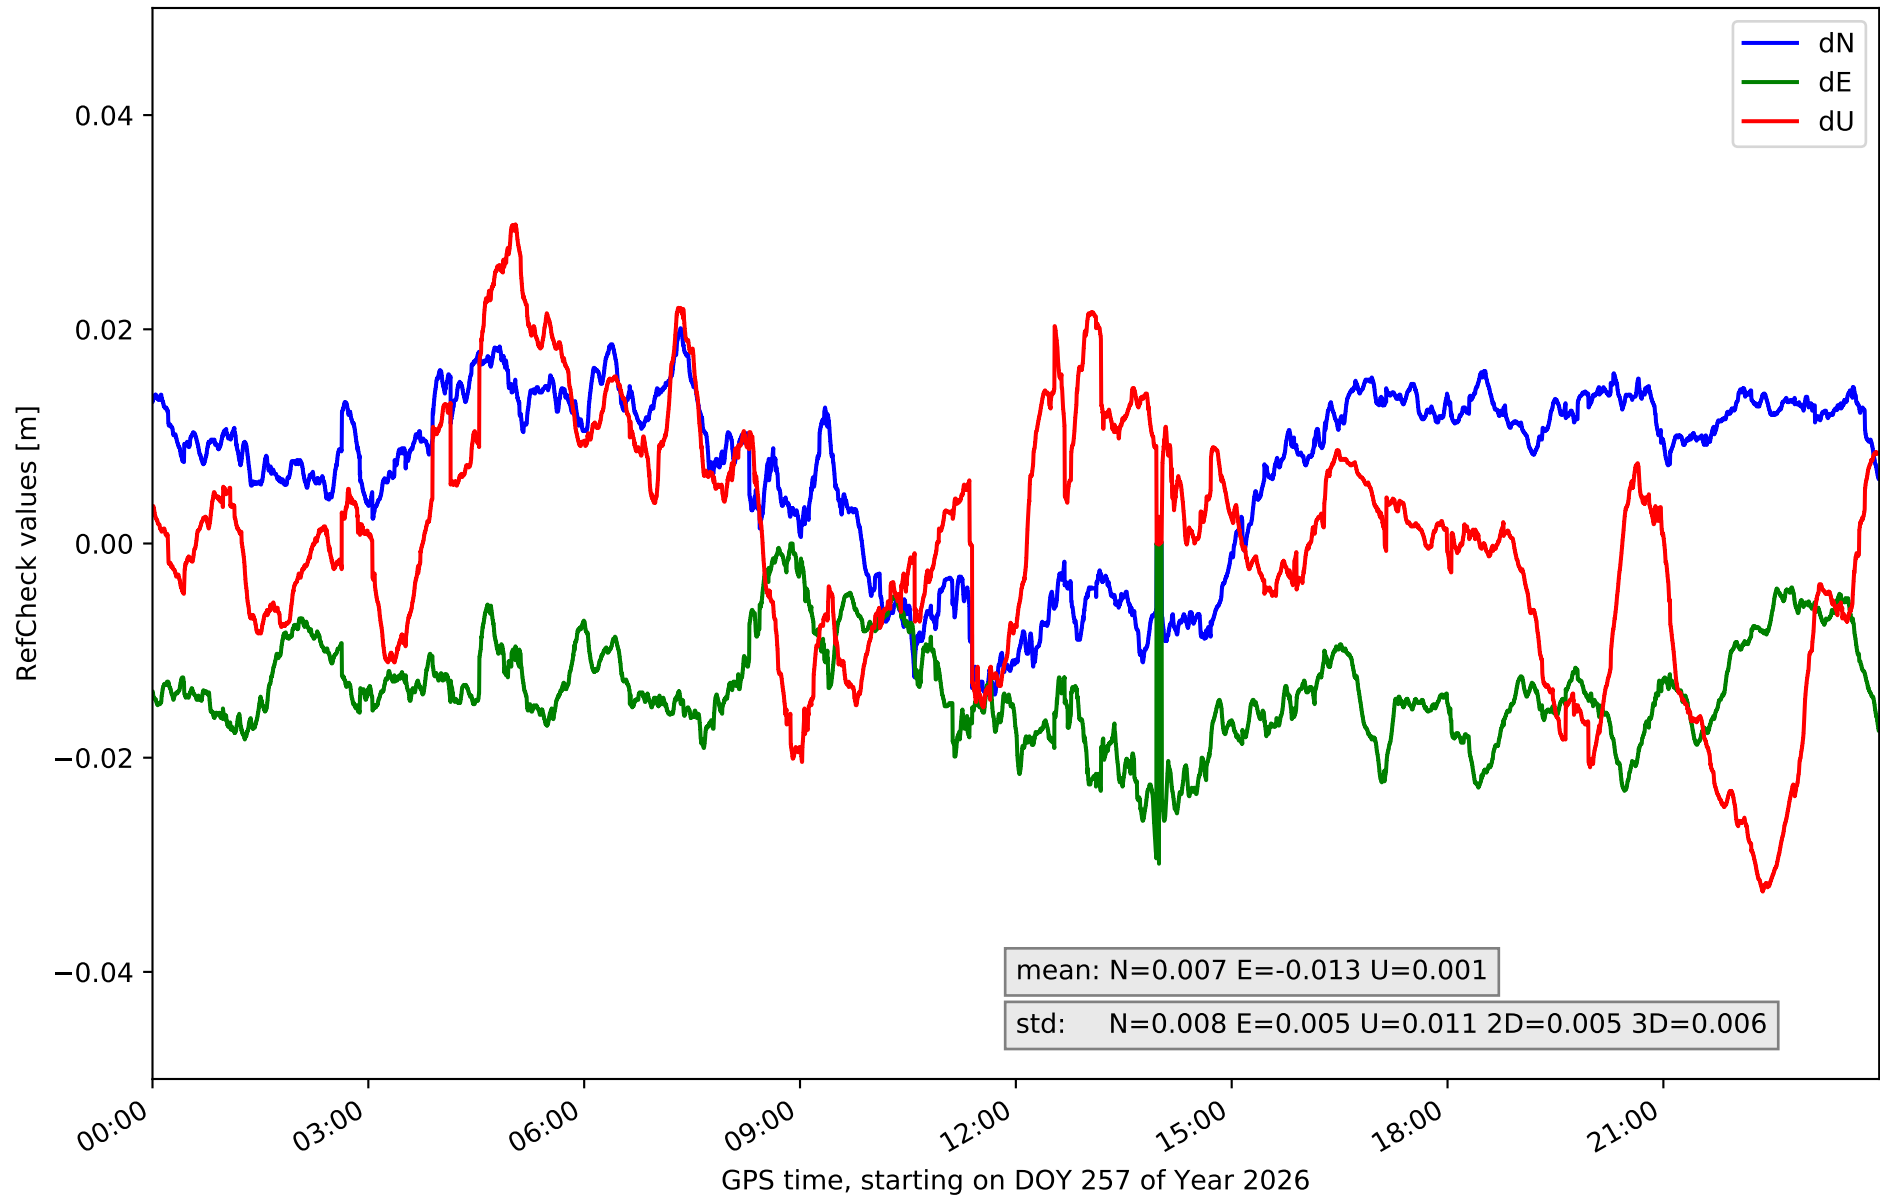

RefCheck for station TE11 in network NT32

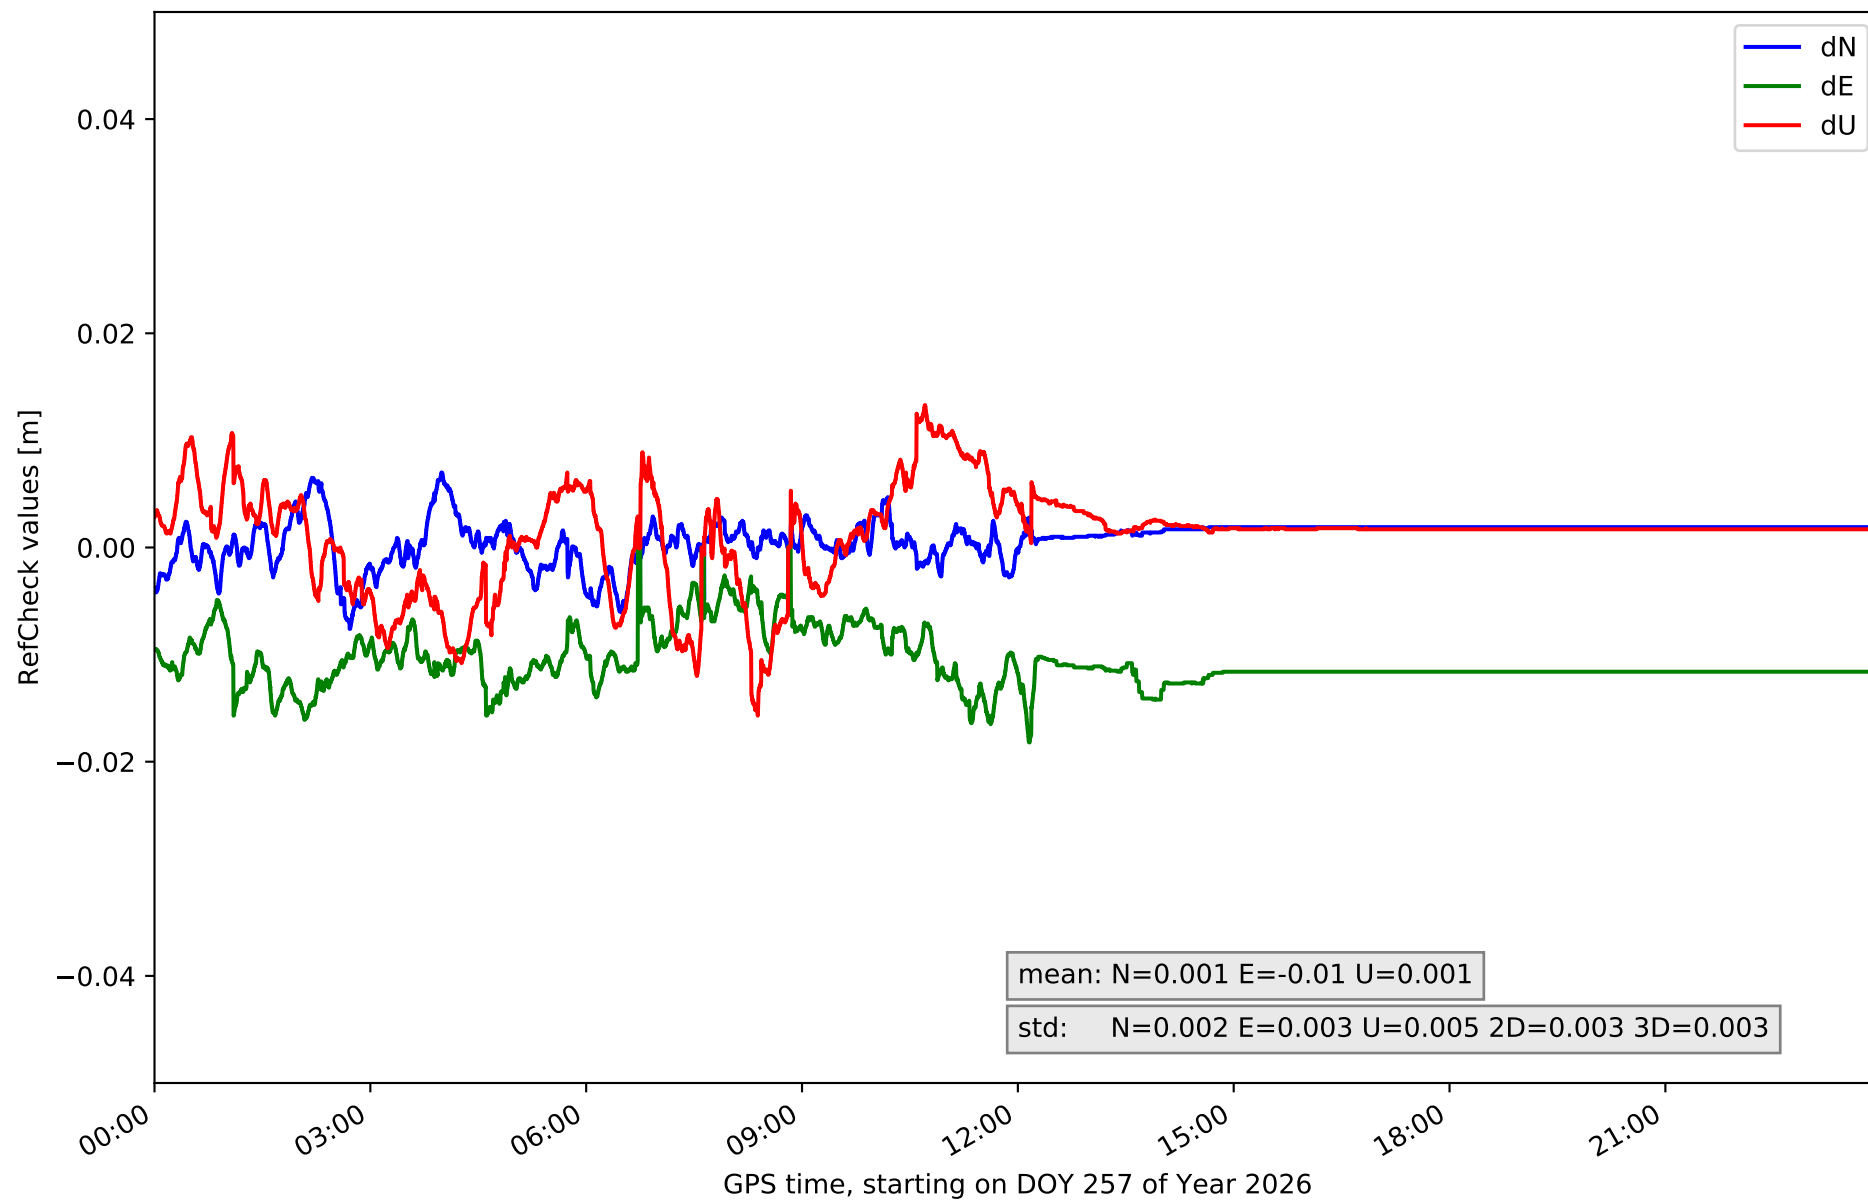

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.006	0.008	0.002	0.007	0.026	0.003	-0.026	0.018	0.007	0.003	0.004	62461	99.0	29379	46.6
EH02	-0.008	0.019	0.005	-0.0	0.033	0.005	-0.053	0.054	0.013	0.005	0.007	61116	96.9	49419	78.3
GOM1	-0.011	0.003	0.002	-0.02	-0.003	0.002	-0.024	0.009	0.006	0.002	0.003	57640	91.3	8785	13.9
GOME	-0.003	0.007	0.002	-0.006	0.006	0.002	-0.004	0.017	0.003	0.001	0.003	0	0.0	0	0.0
IZAN	-0.011	0.005	0.003	-0.024	0.0	0.003	-0.019	0.007	0.005	0.003	0.004	54822	86.9	2513	4.0
LP01	-0.02	-0.008	0.002	-0.002	0.015	0.003	-0.001	0.029	0.006	0.002	0.004	62368	98.8	40294	63.9
LP03	-0.015	0.014	0.004	-0.006	0.022	0.006	-0.024	0.032	0.011	0.004	0.007	22865	36.2	13259	21.0
LPAL	-0.019	0.0	0.004	0.005	0.02	0.003	-0.027	0.013	0.008	0.003	0.003	63101	100.0	31392	49.7
LRES	0.0	0.018	0.003	0.0	0.028	0.004	-0.02	0.018	0.007	0.003	0.003	62995	99.8	42896	68.0
TN01	-0.011	0.004	0.002	-0.028	-0.009	0.003	-0.034	-0.001	0.007	0.003	0.005	62791	99.5	25023	39.7
TN02	-0.011	0.008	0.003	-0.022	0.008	0.004	-0.01	0.029	0.008	0.004	0.005	26346	41.8	10126	16.0
TN03	-0.005	0.012	0.003	-0.011	0.004	0.002	-0.024	0.007	0.007	0.002	0.004	5533	8.8	2299	3.6
TN06	-0.011	0.005	0.002	-0.014	0.003	0.003	-0.03	0.011	0.006	0.002	0.004	22692	36.0	1420	2.3
TN09	-0.014	0.02	0.008	-0.03	0.0	0.005	-0.033	0.03	0.011	0.005	0.006	56307	89.2	29434	46.6
TE11	-0.008	0.007	0.002	-0.018	0.0	0.003	-0.016	0.013	0.005	0.003	0.003	43815	69.4	0	0.0
Mean	-0.01	0.008	0.003	-0.011	0.01	0.003	-0.023	0.019	0.007	0.003	0.004	44323.5	70.2	19082.6	30.2
Min/Max	-0.02	0.02	0.008	-0.03	0.033	0.006	-0.053	0.054	0.013	0.005	0.007	63101	100.0	49419	78.3

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	94.7	94.9	94.4	94.7	94.3
considering satellites with dual-frequency fixed	93.0	93.5	91.8	93.3	92.9
considering all signals separately	93.2	93.7	91.8	93.5	92.7