

summary for network NT32

timeperiod chosen: from 2026-09-15-00:00:00 until 2026-09-15-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 2.0 seconds


average fixing percentage with threshold set to 0.3: 94.0 percent

stations available: 14 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

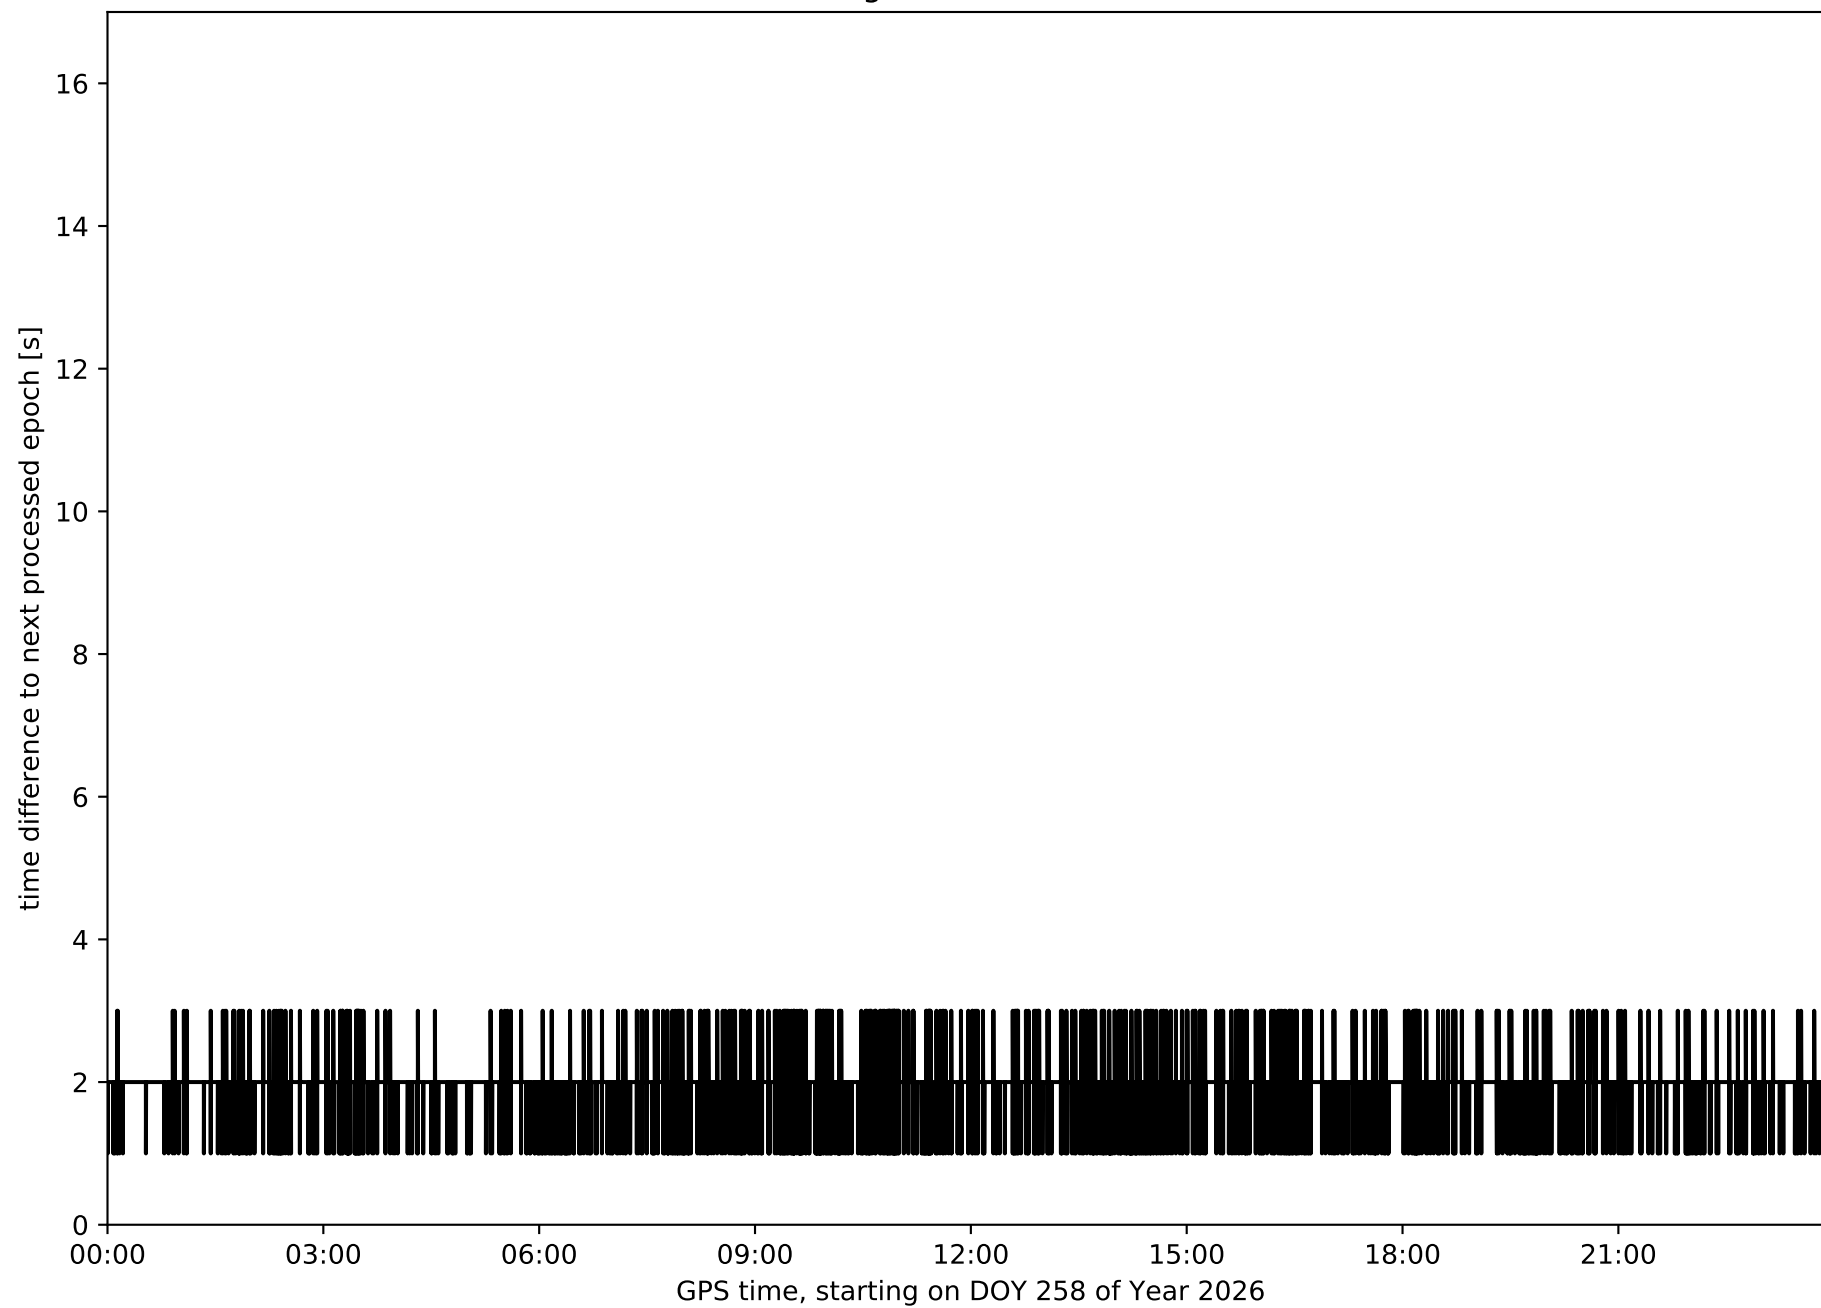


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

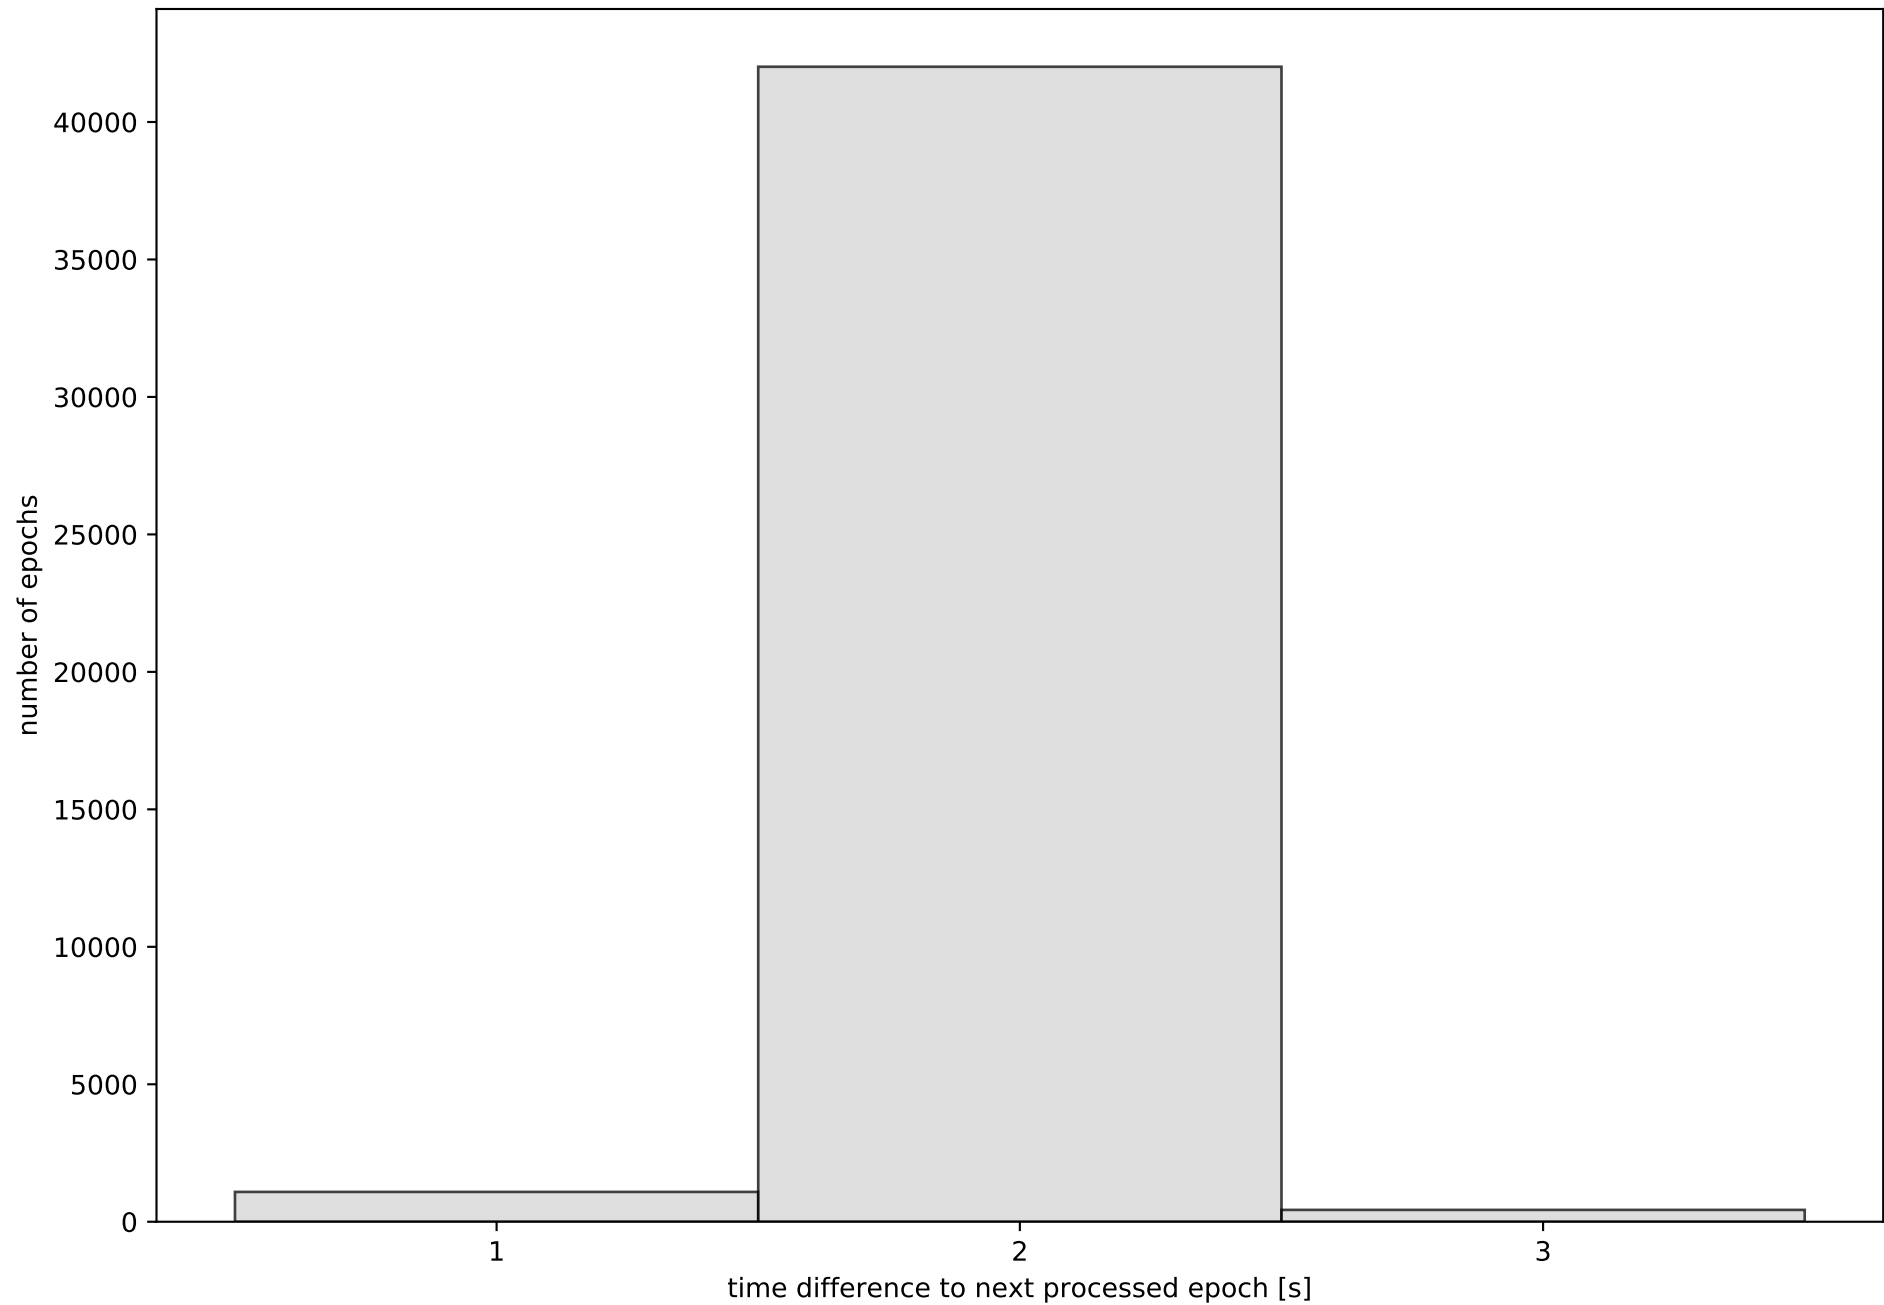


Network NT32 with threshold set to 0.3

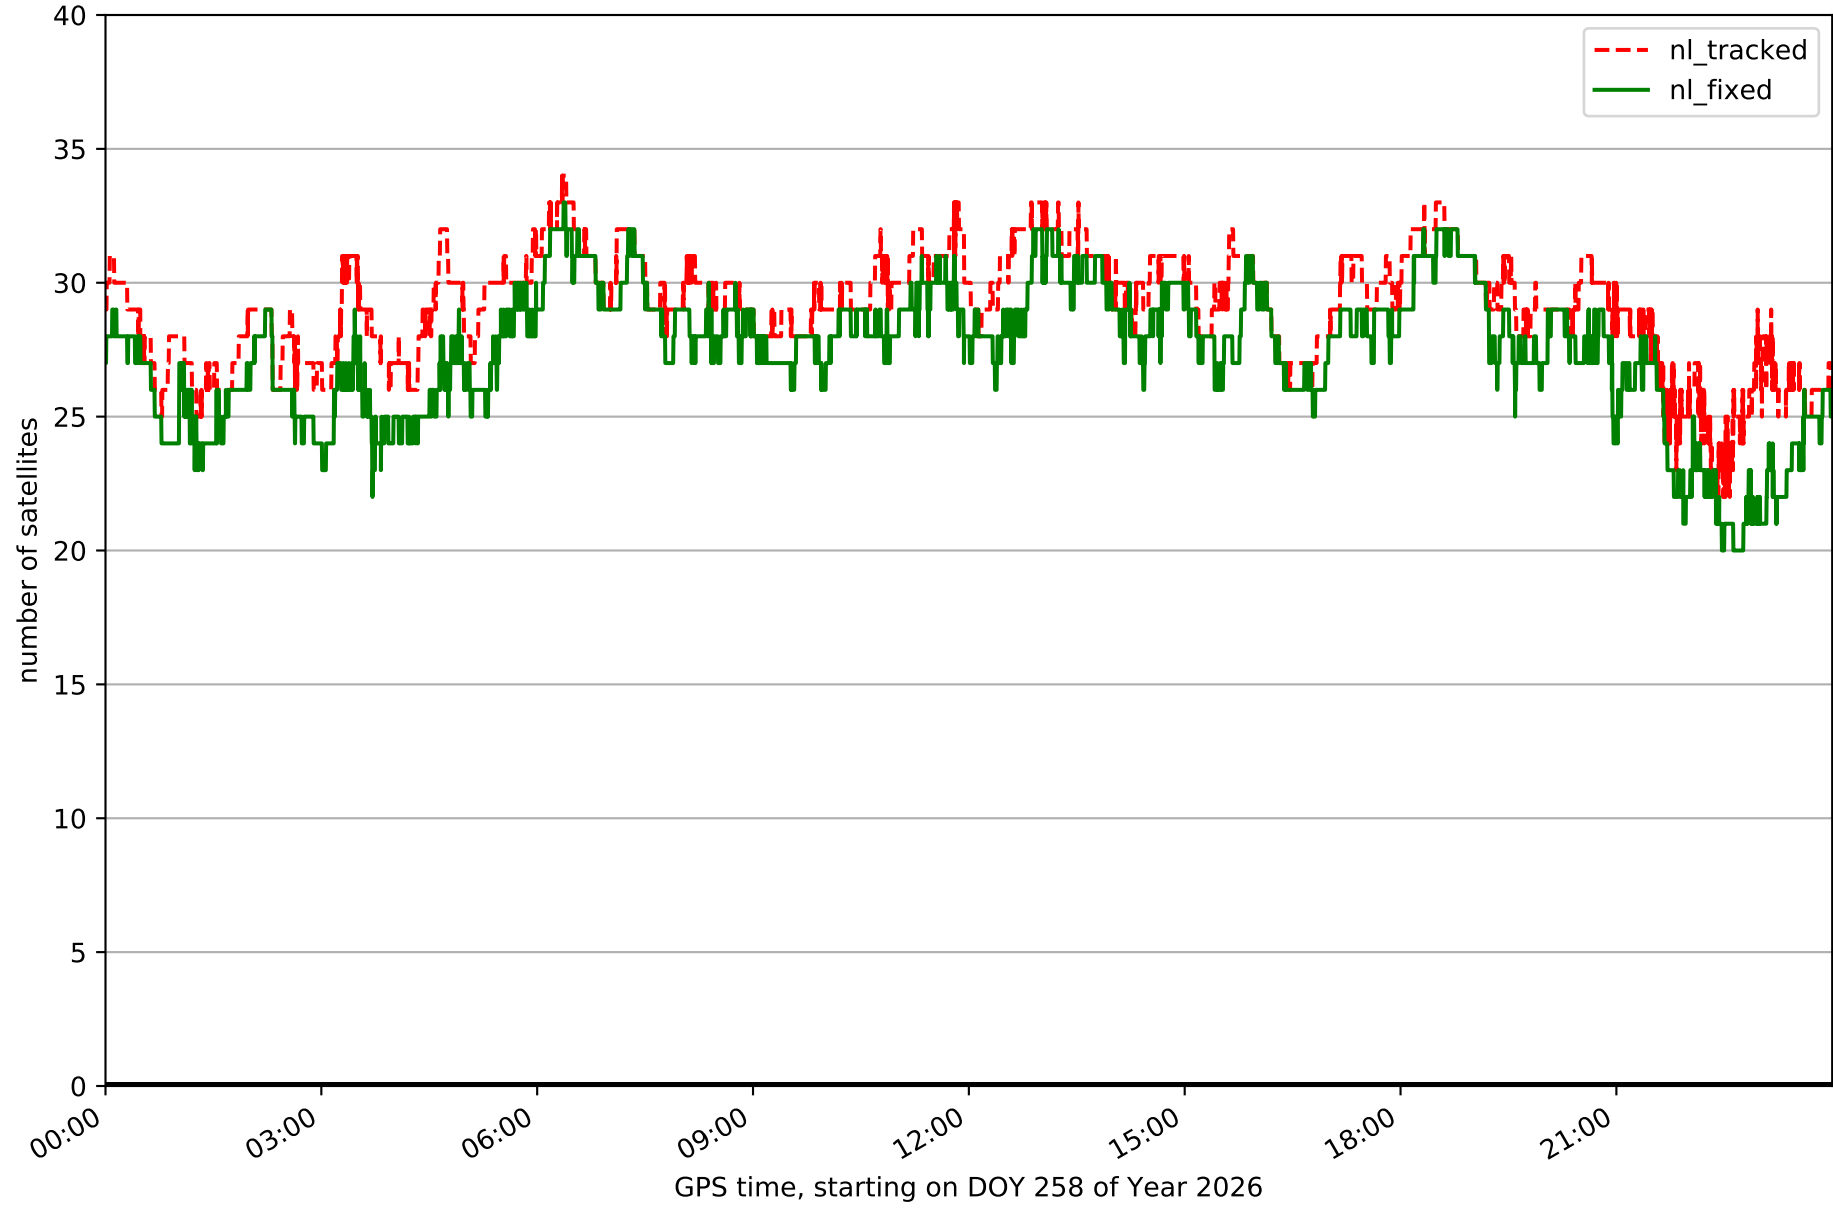


Fixing percentage of satellites in network NT32 with threshold set to 0.3

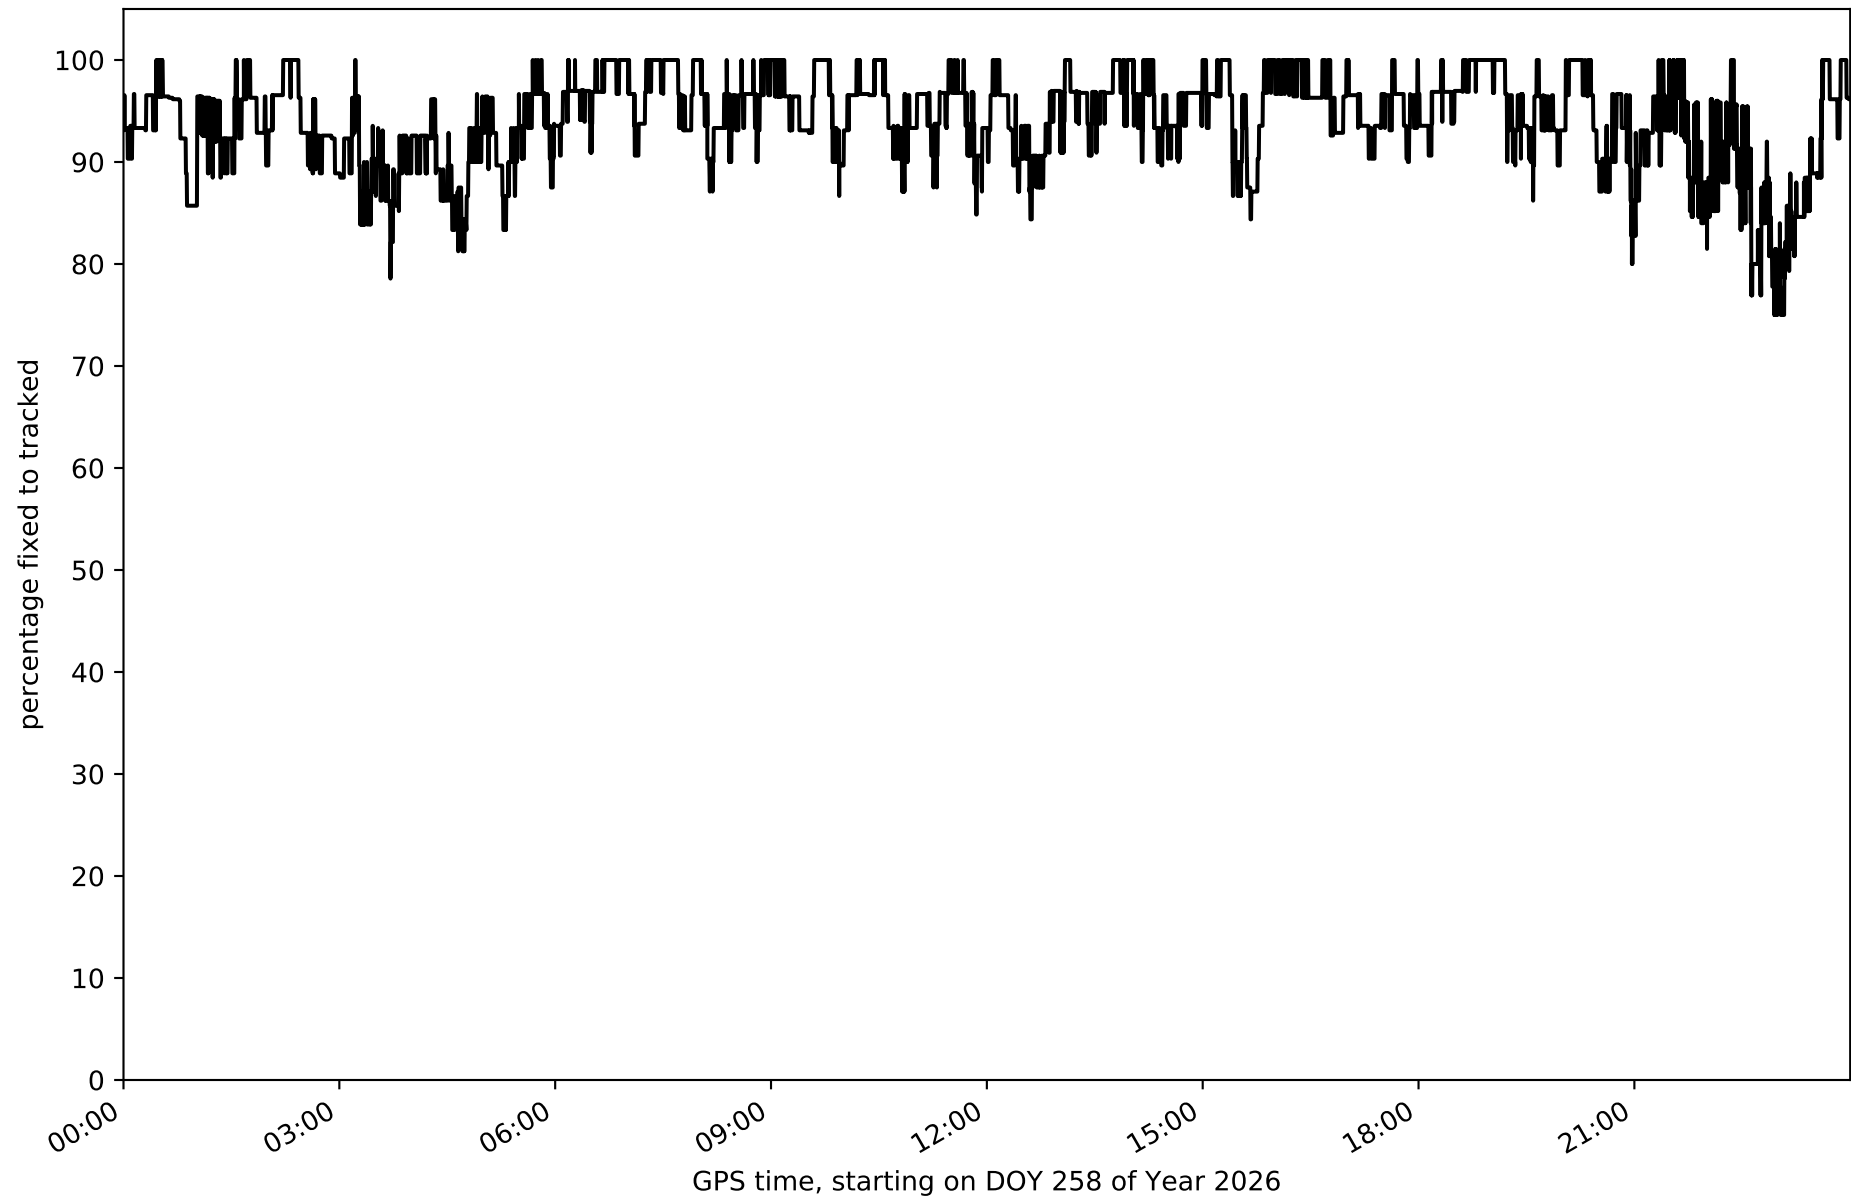


Network NT32 - only GPS with threshold set to 0.3

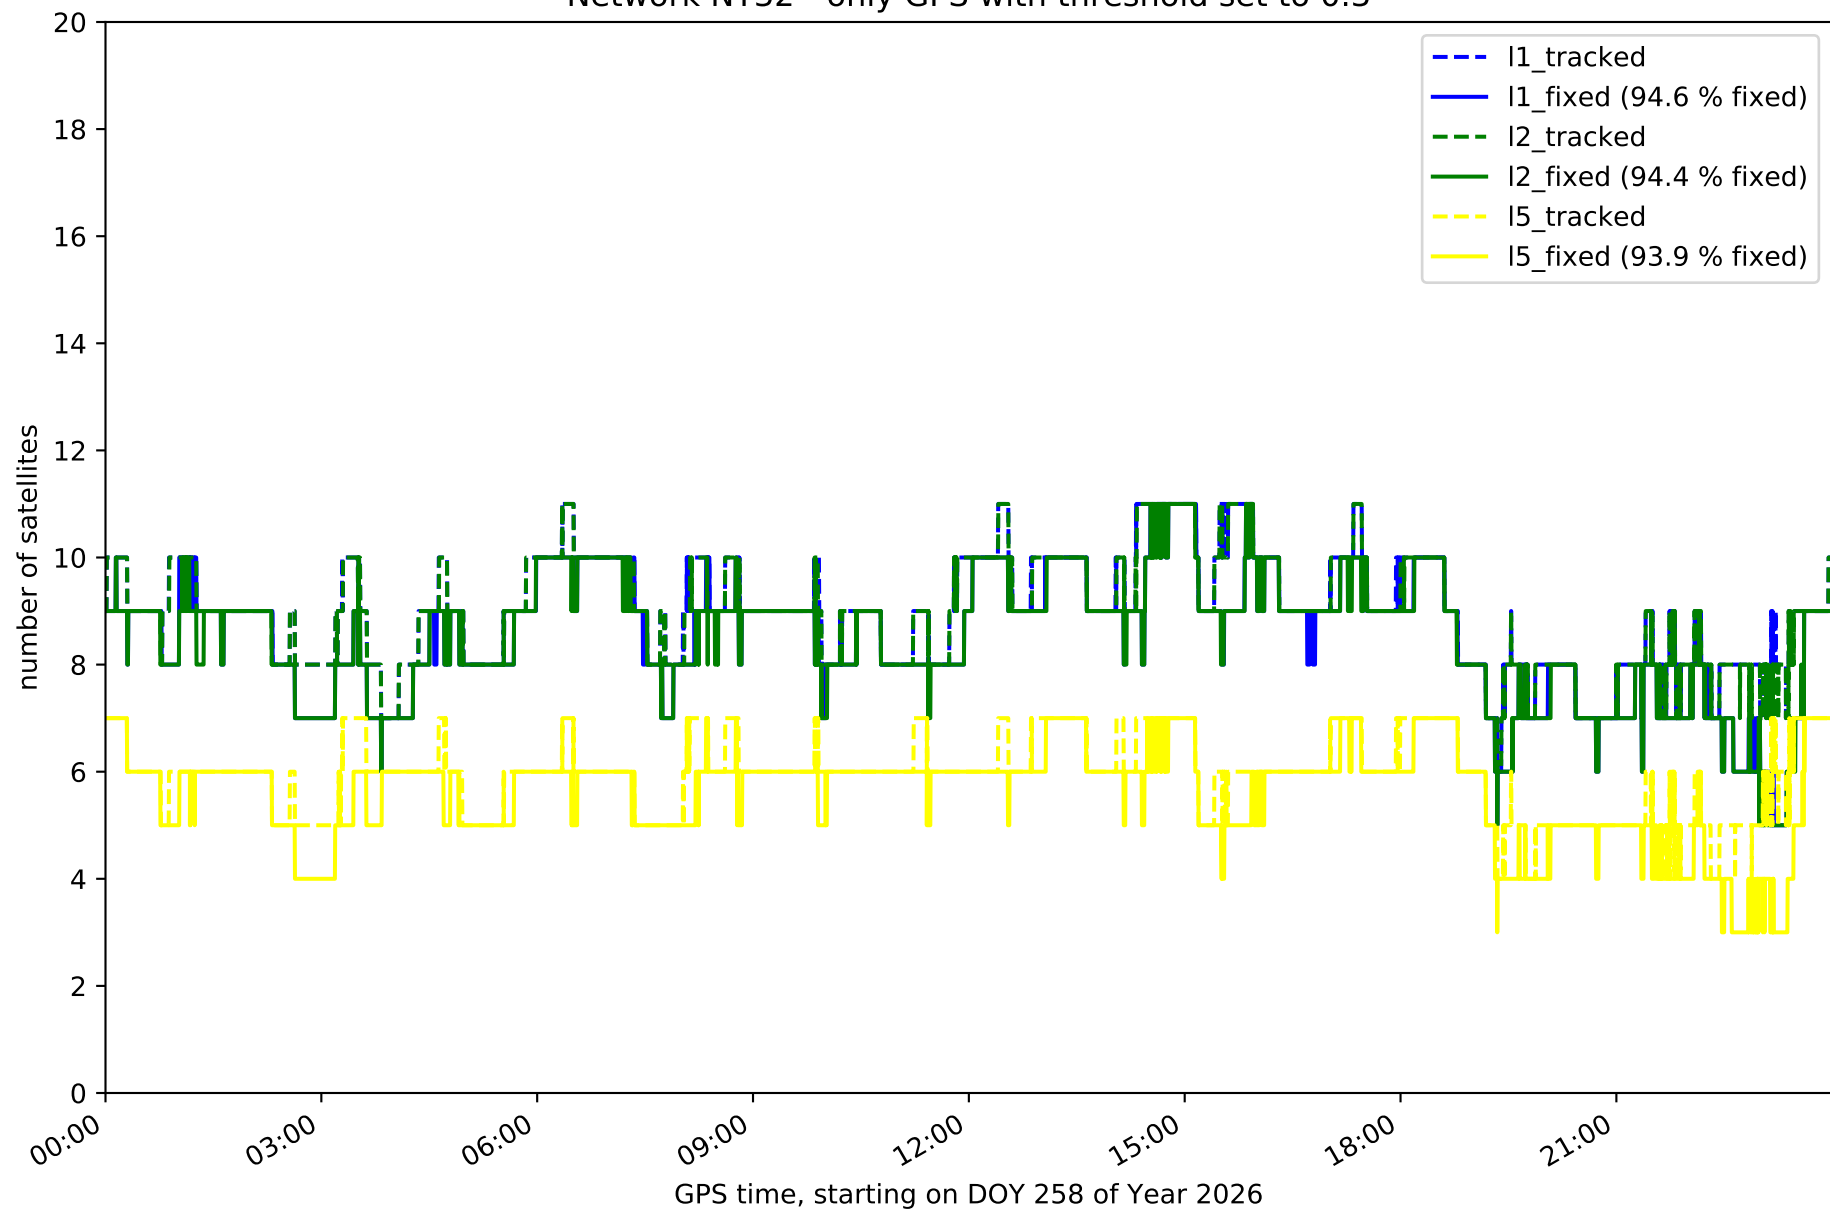


Network NT32 - only GLONASS with threshold set to 0.3

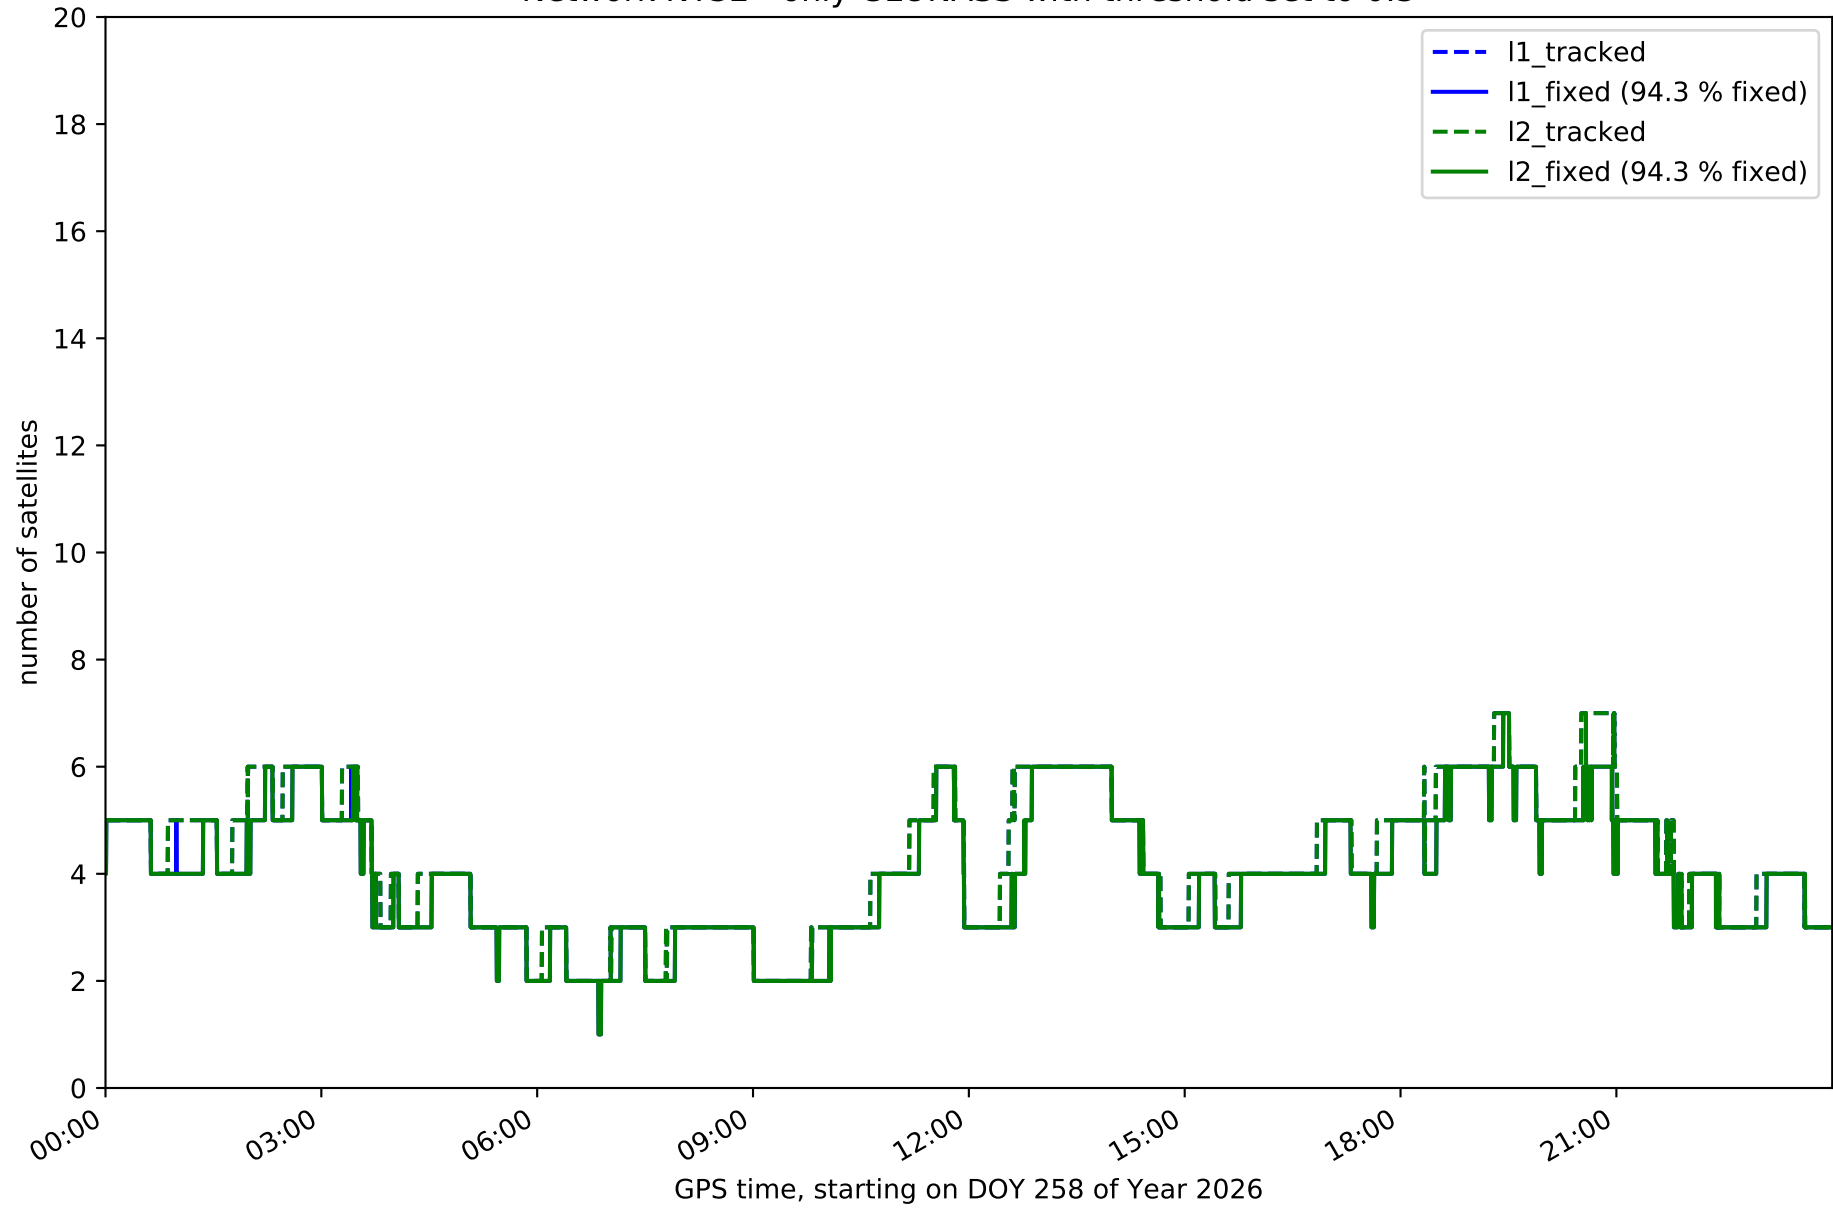


Network NT32 - only BDS with threshold set to 0.3

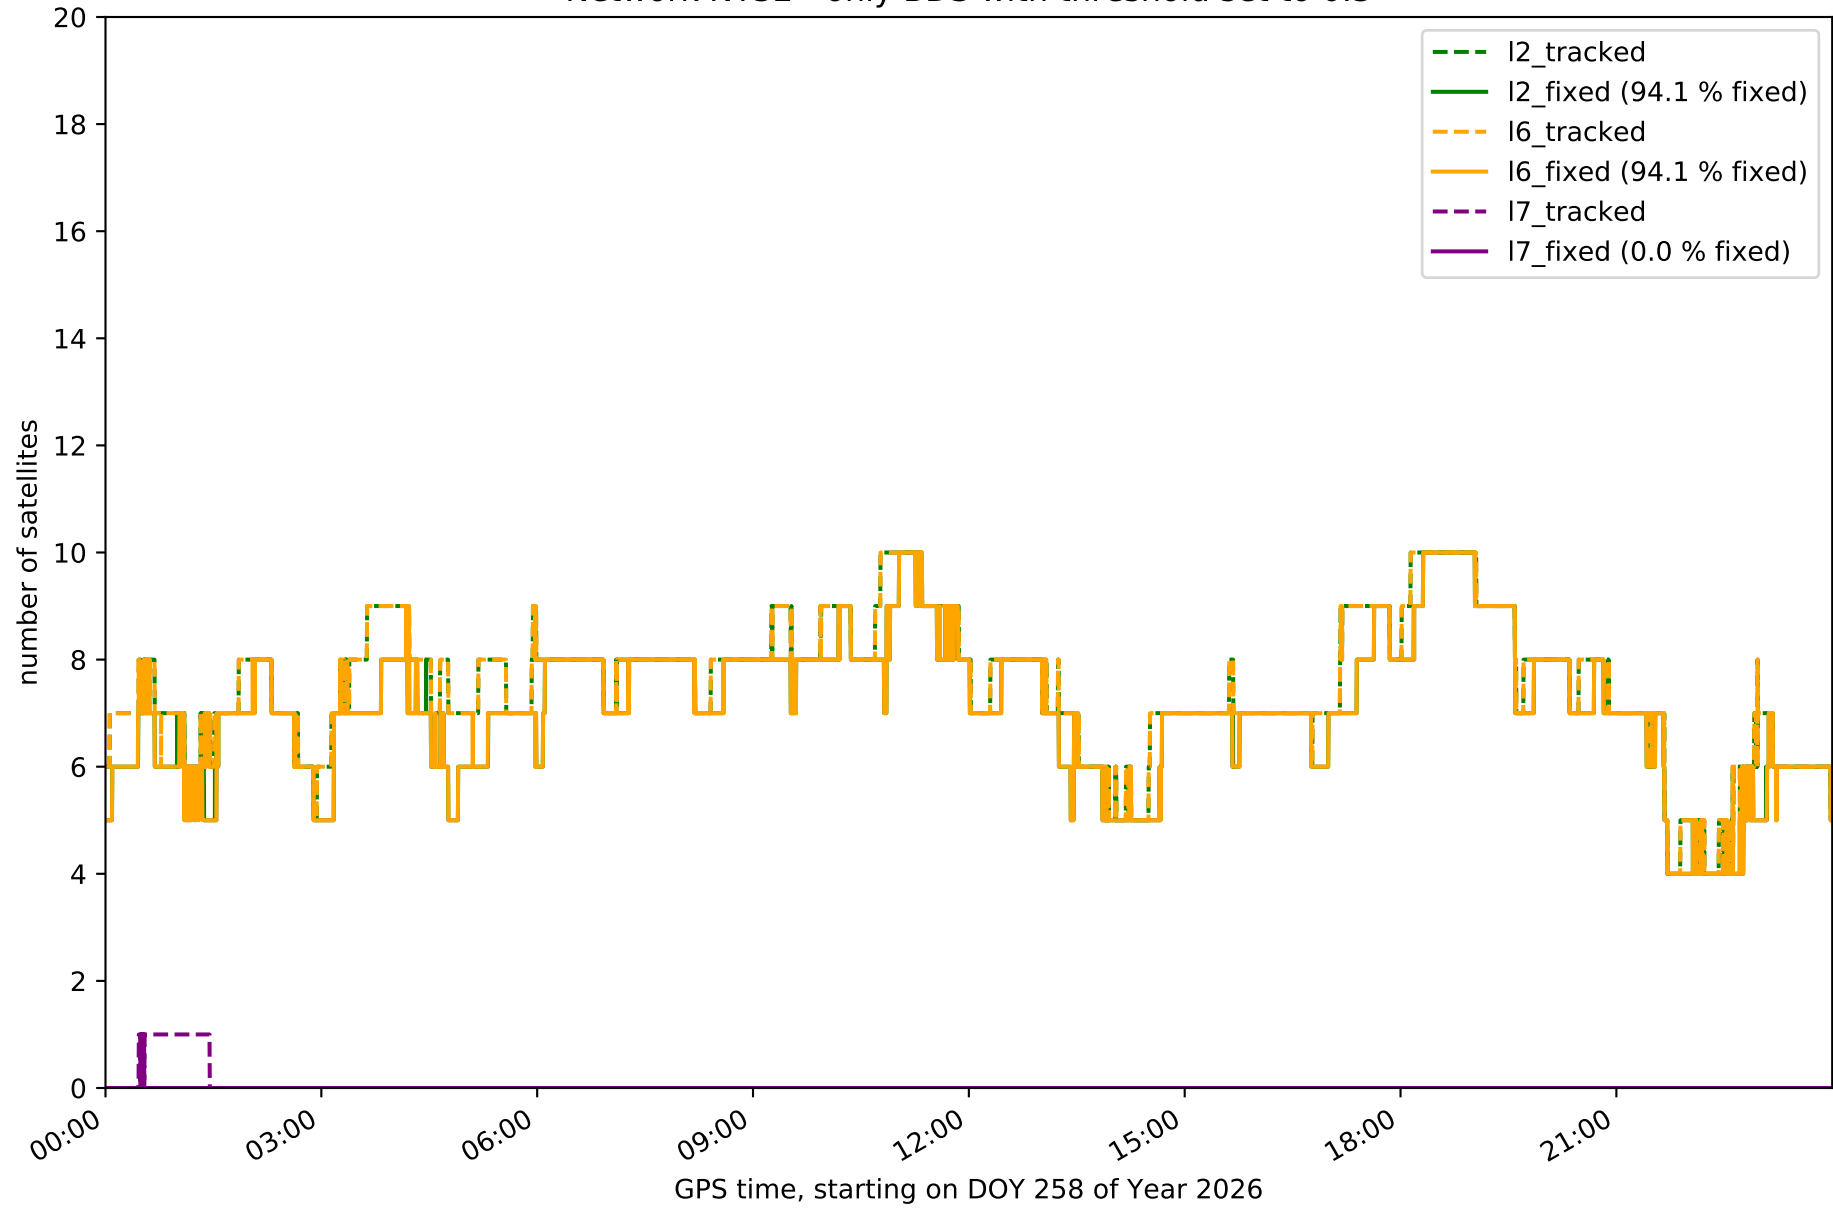


Network NT32 - only Galileo with threshold set to 0.3

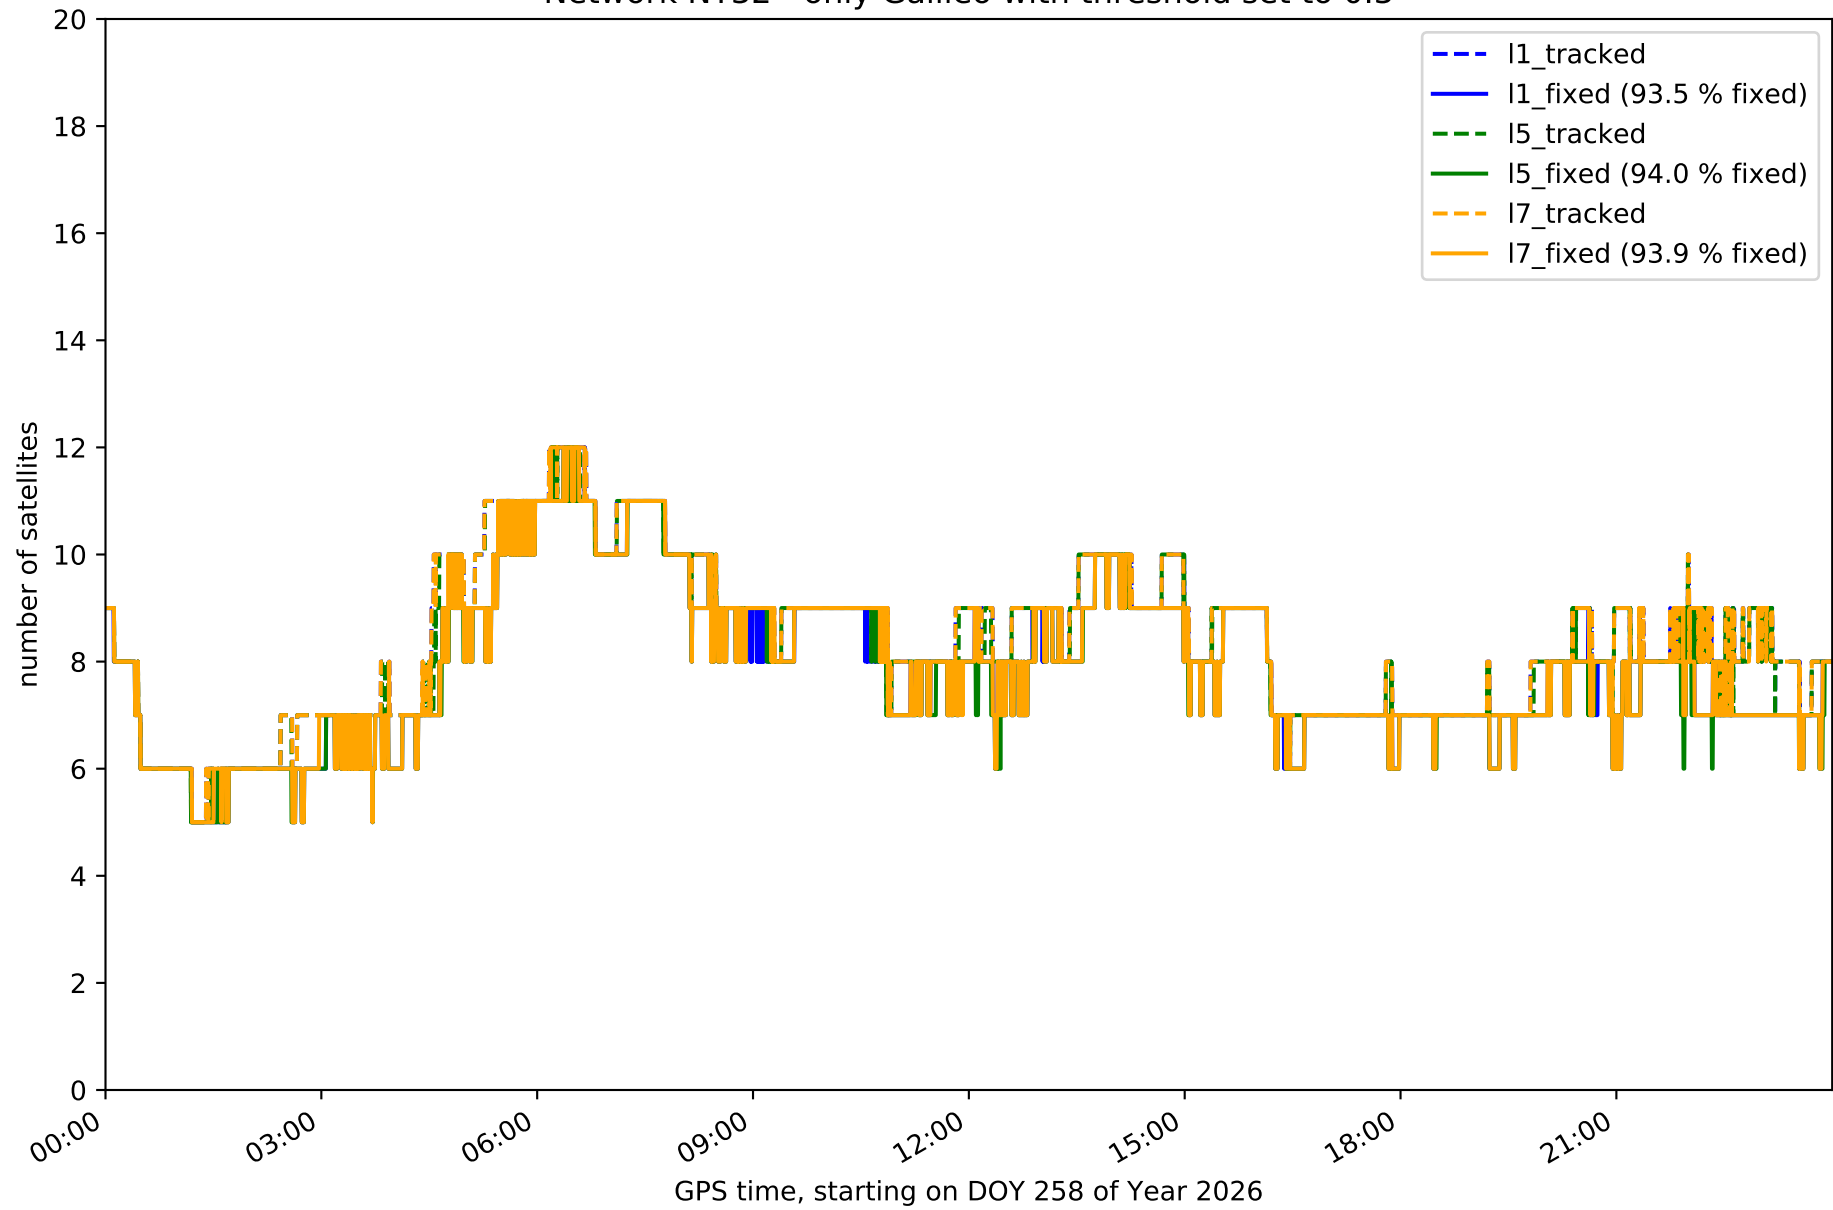


Station EH01 in network NT32

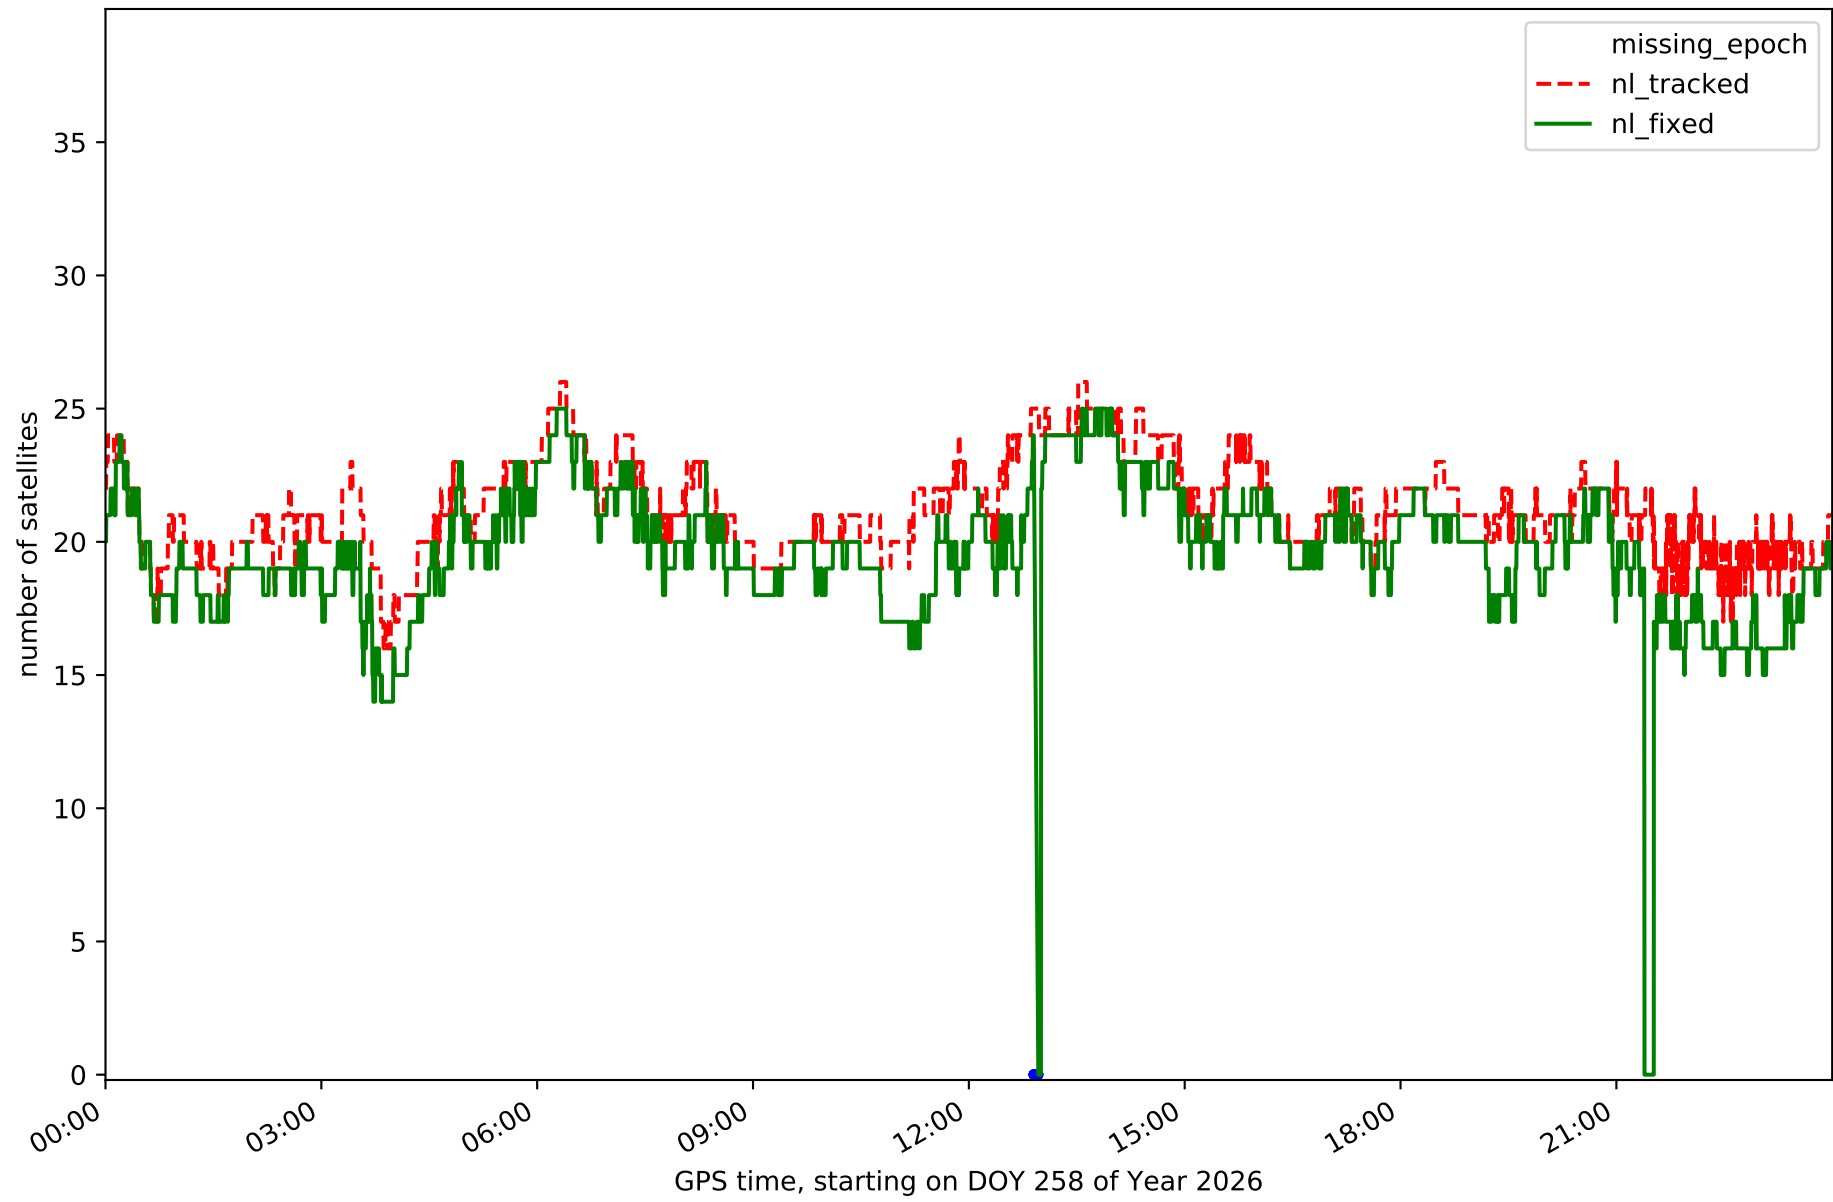


Station EH02 in network NT32

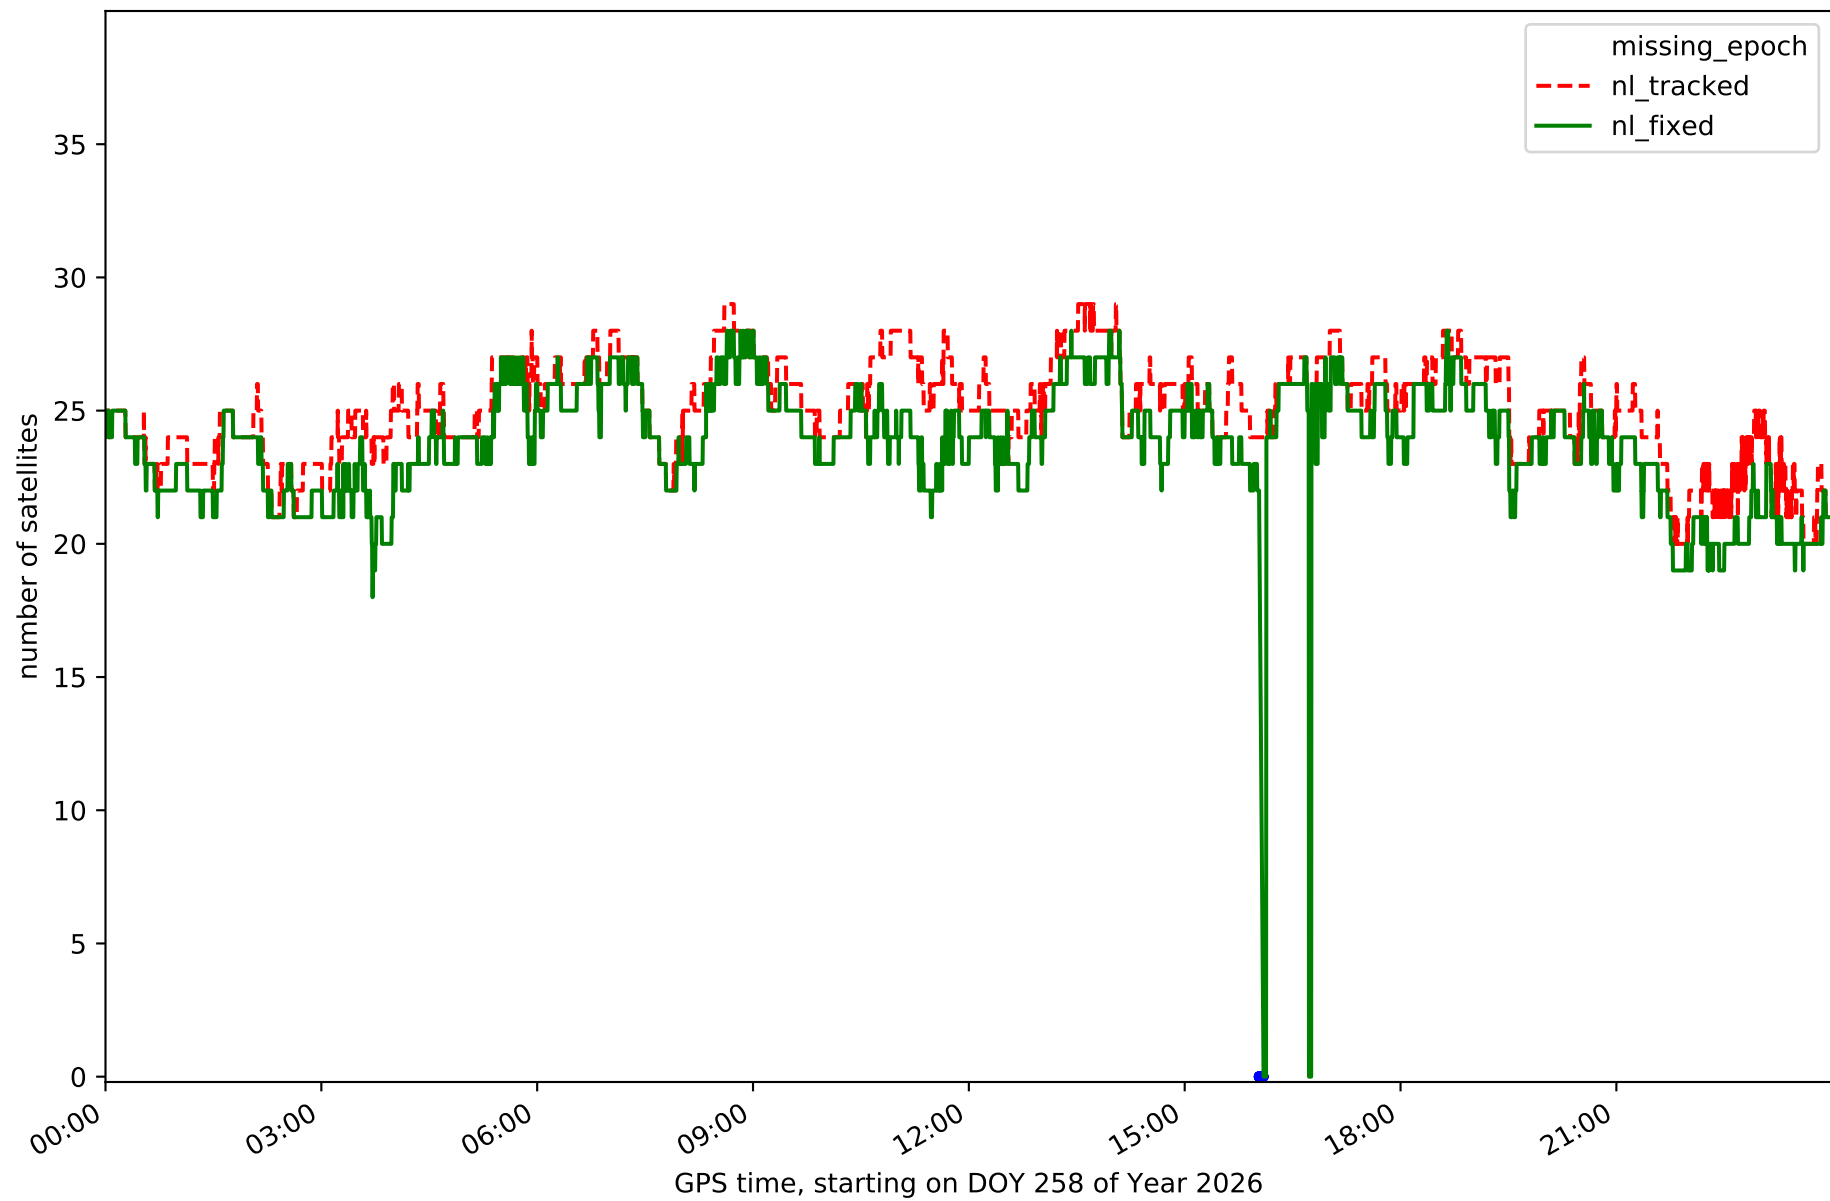


Station GOM1 in network NT32

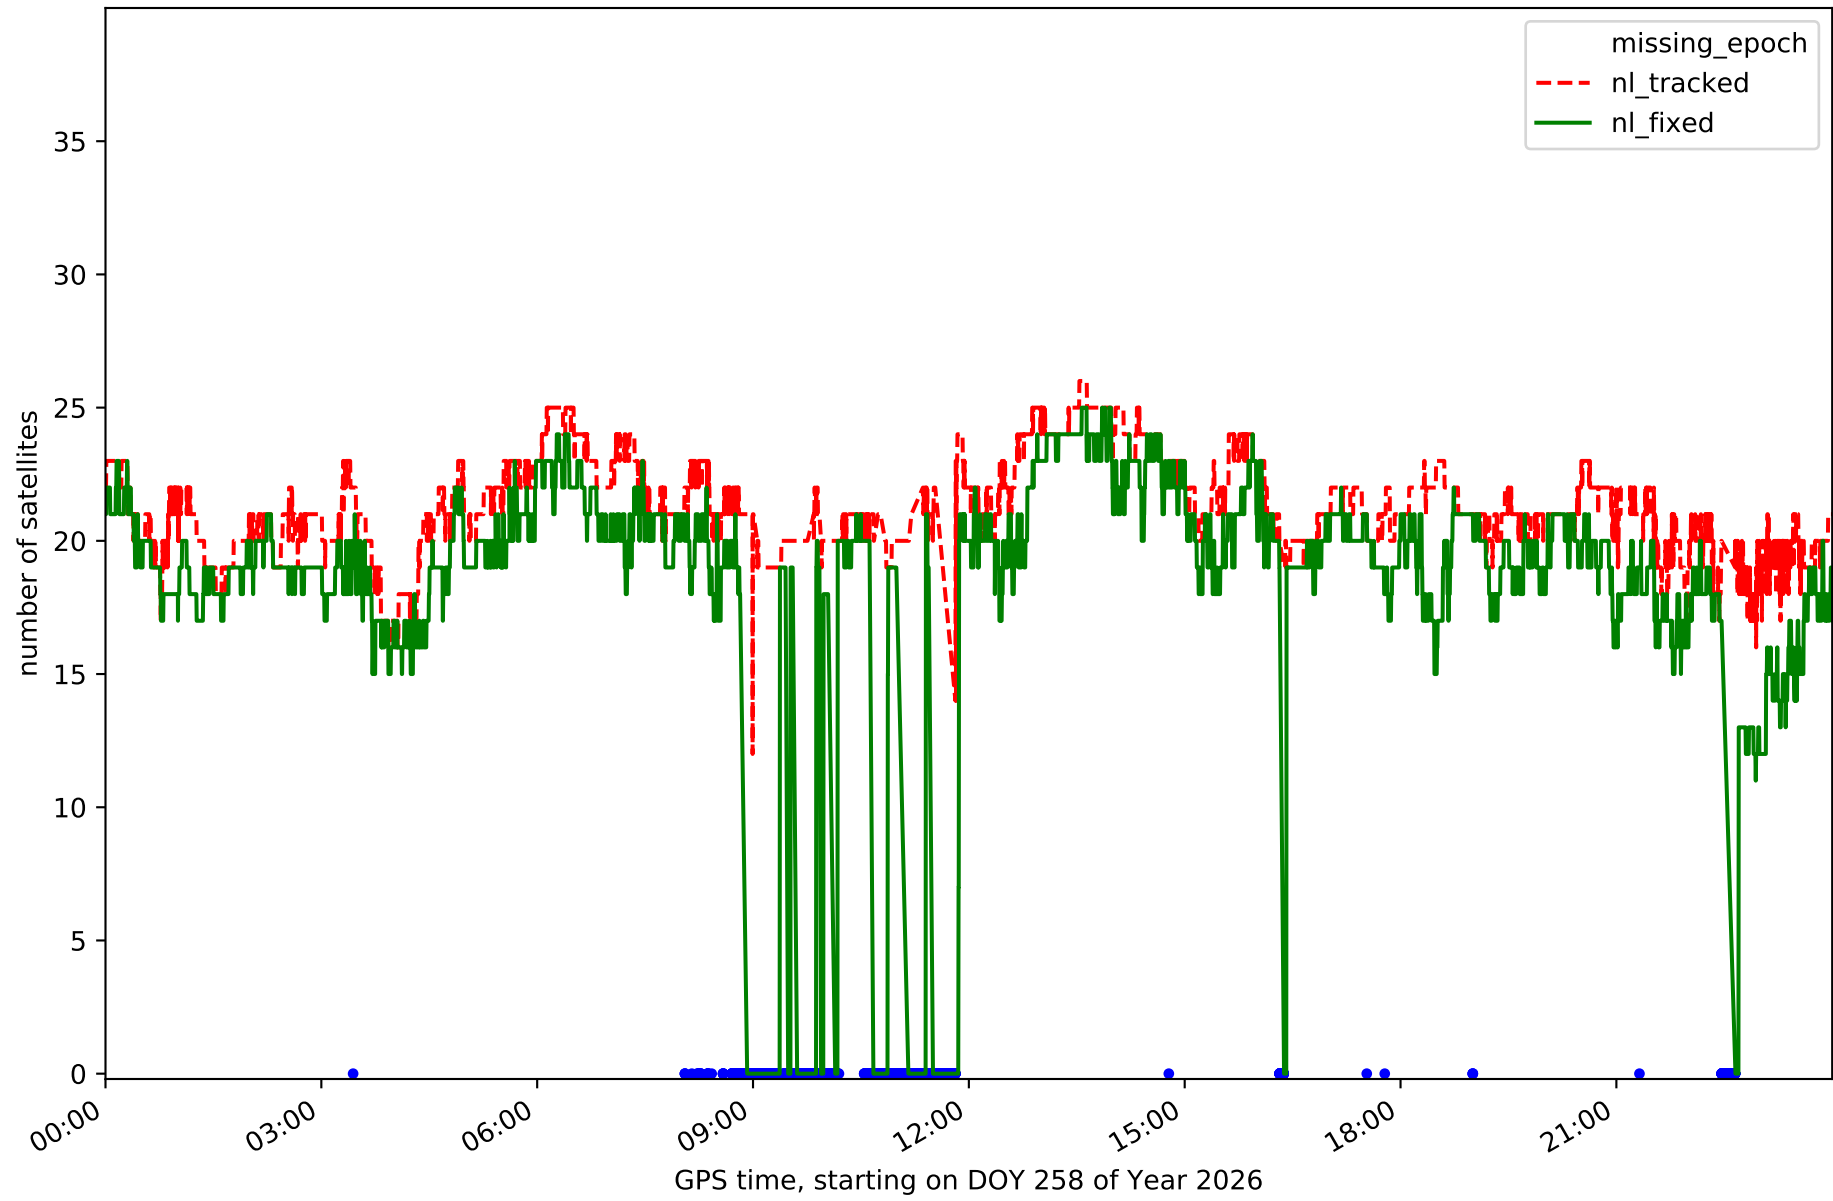


Station GOME in network NT32

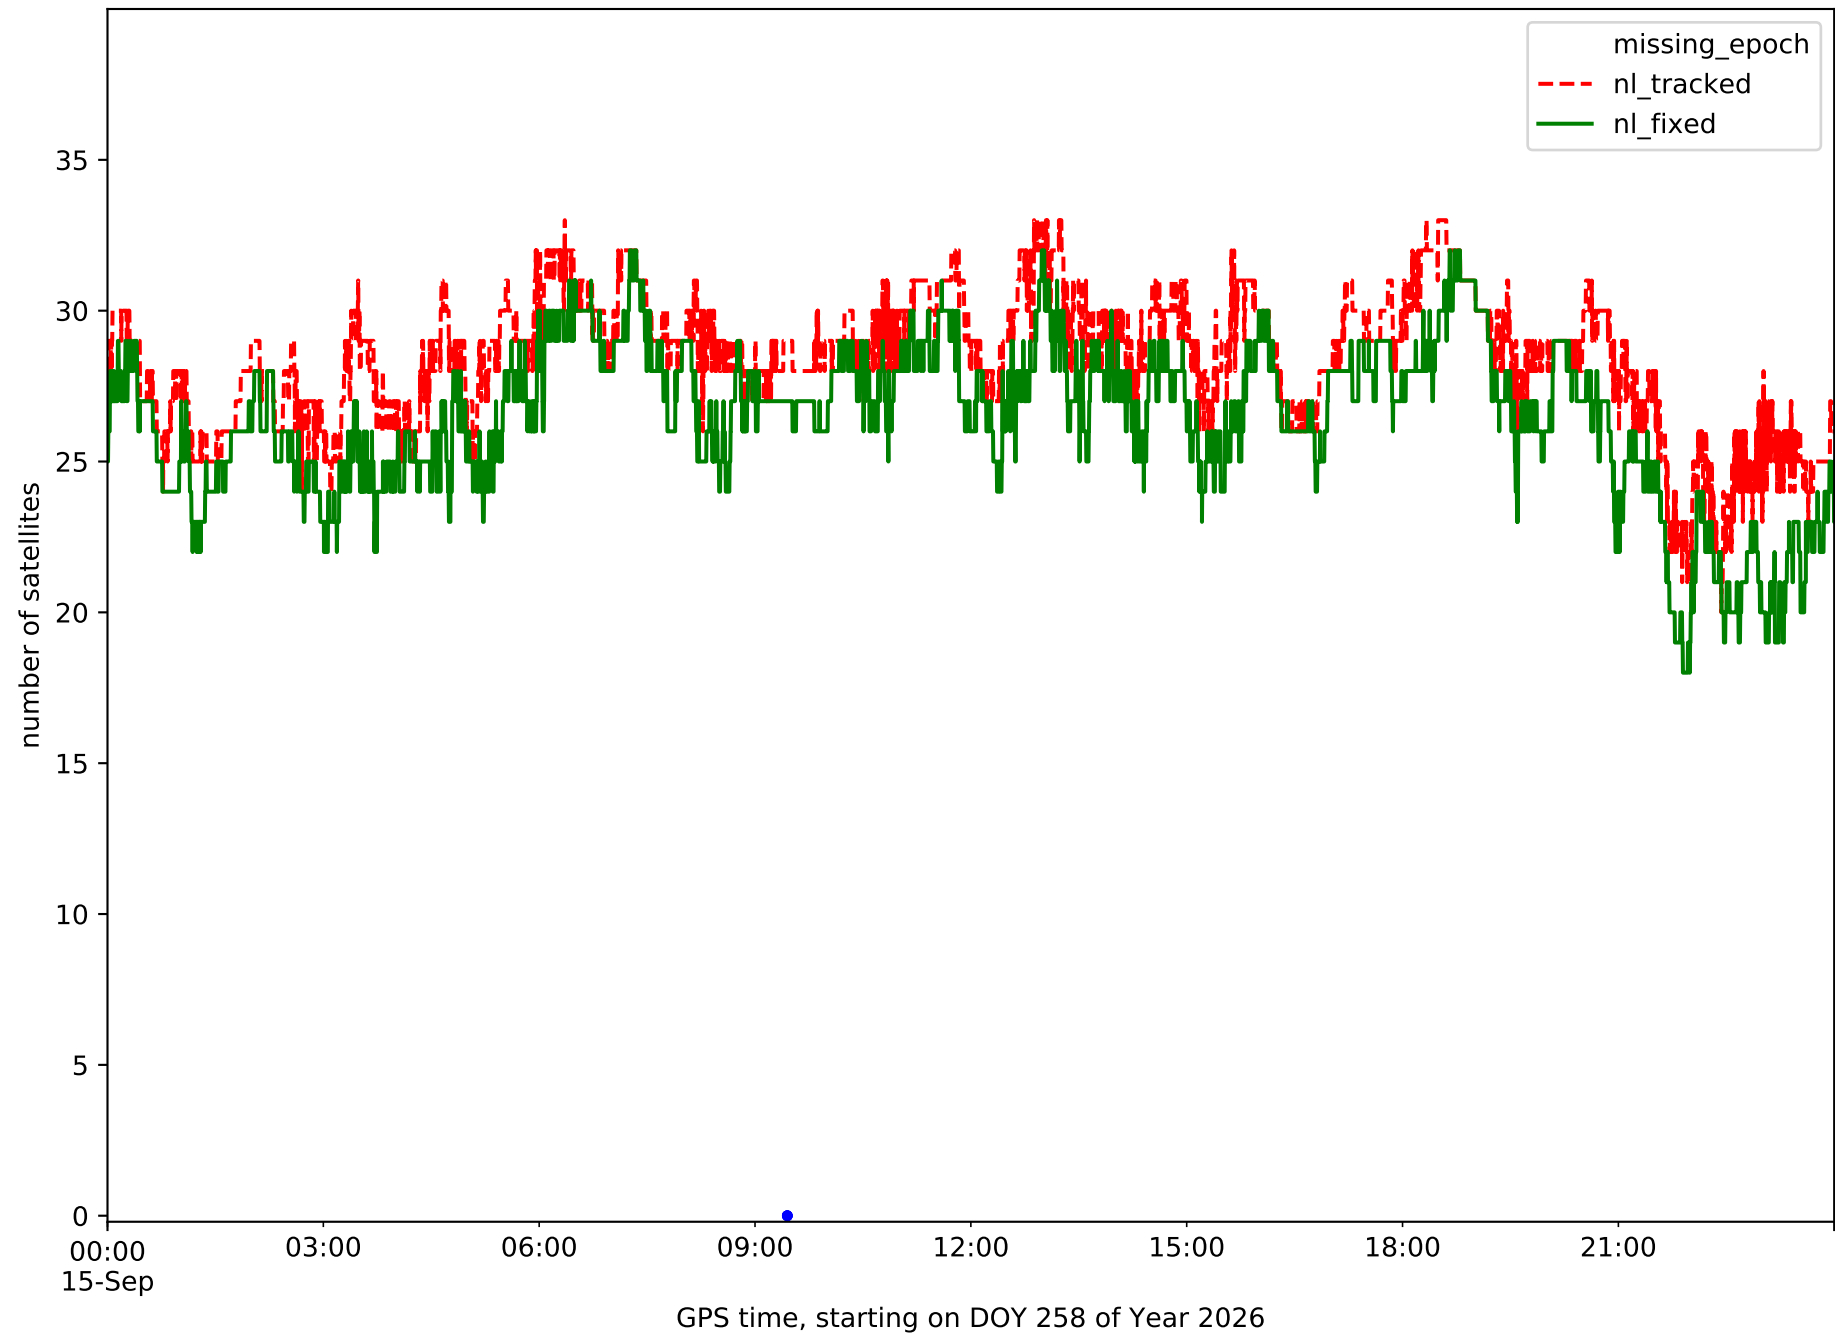


Station IZAN in network NT32

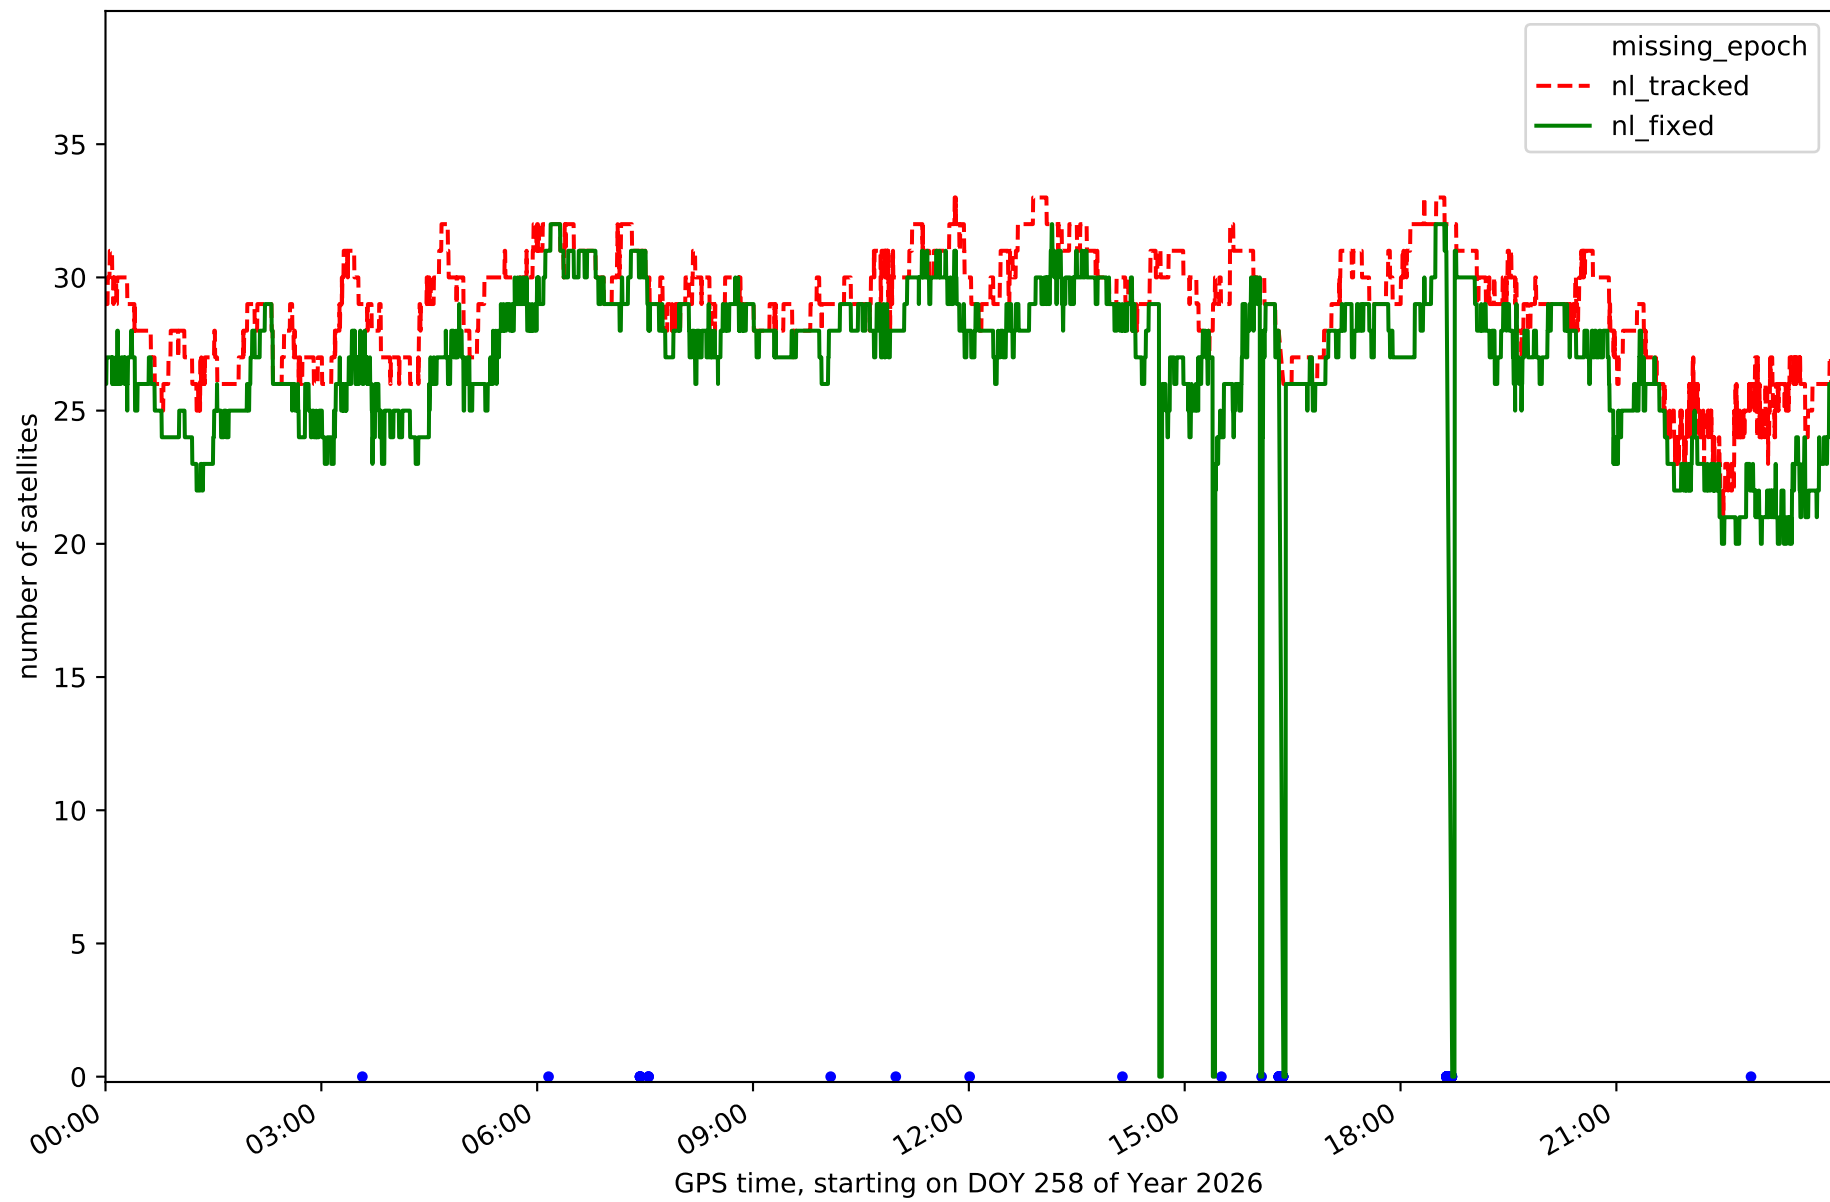


Station LP01 in network NT32

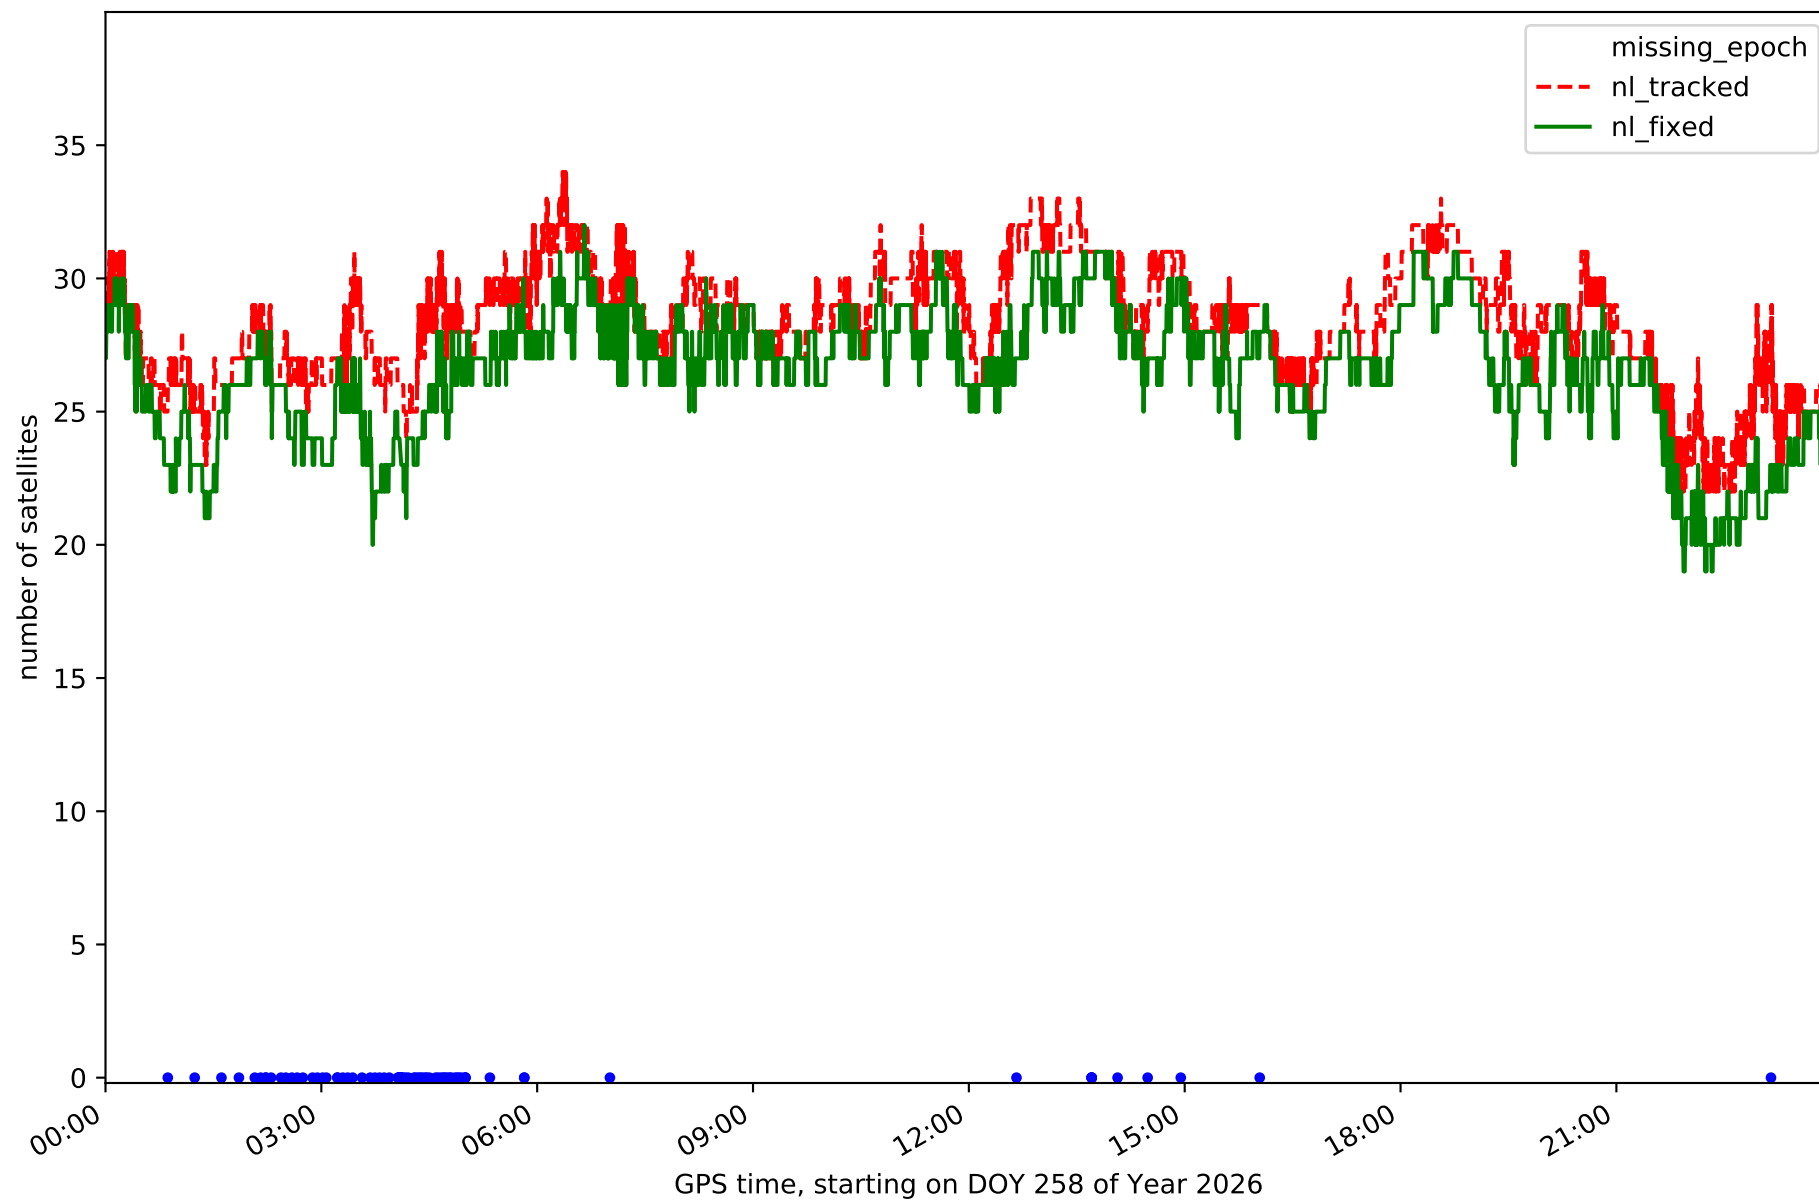


Station LP03 in network NT32

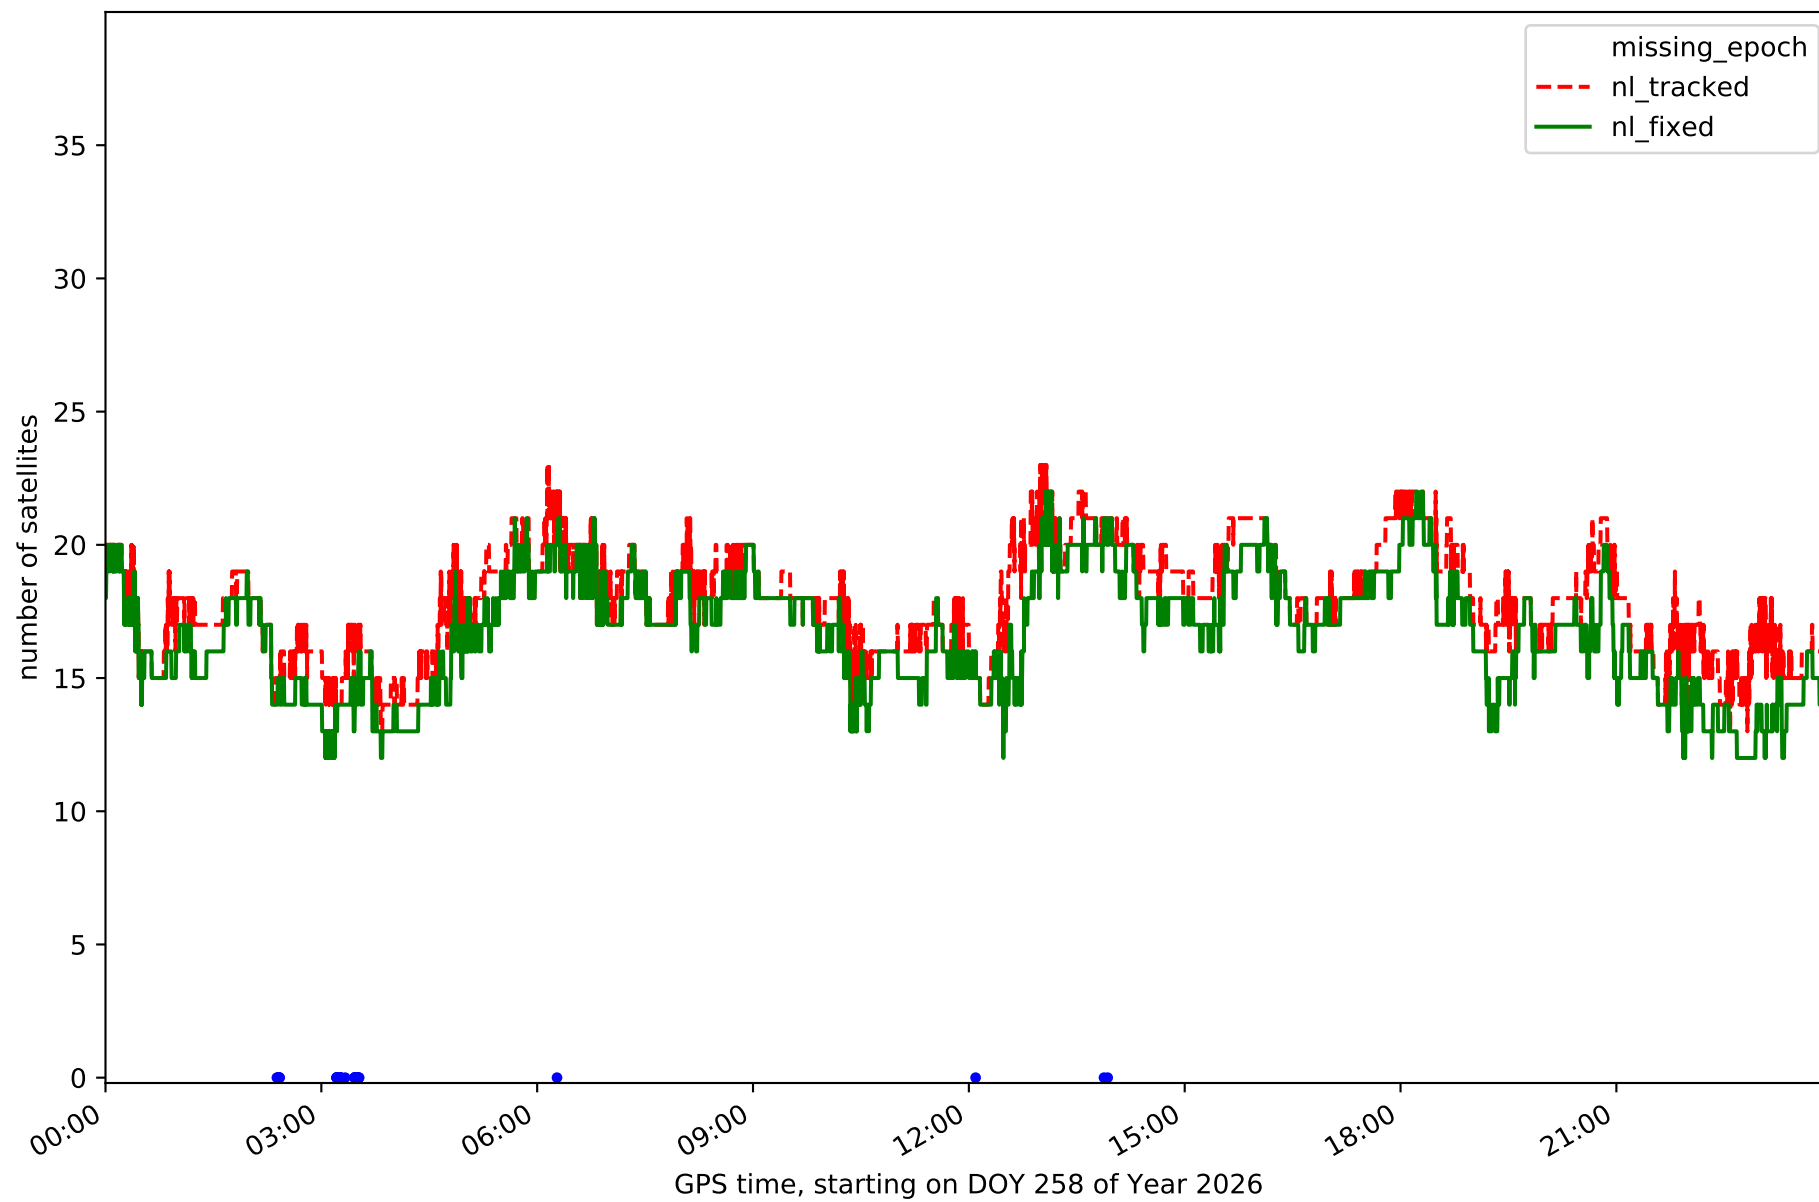


Station LPAL in network NT32

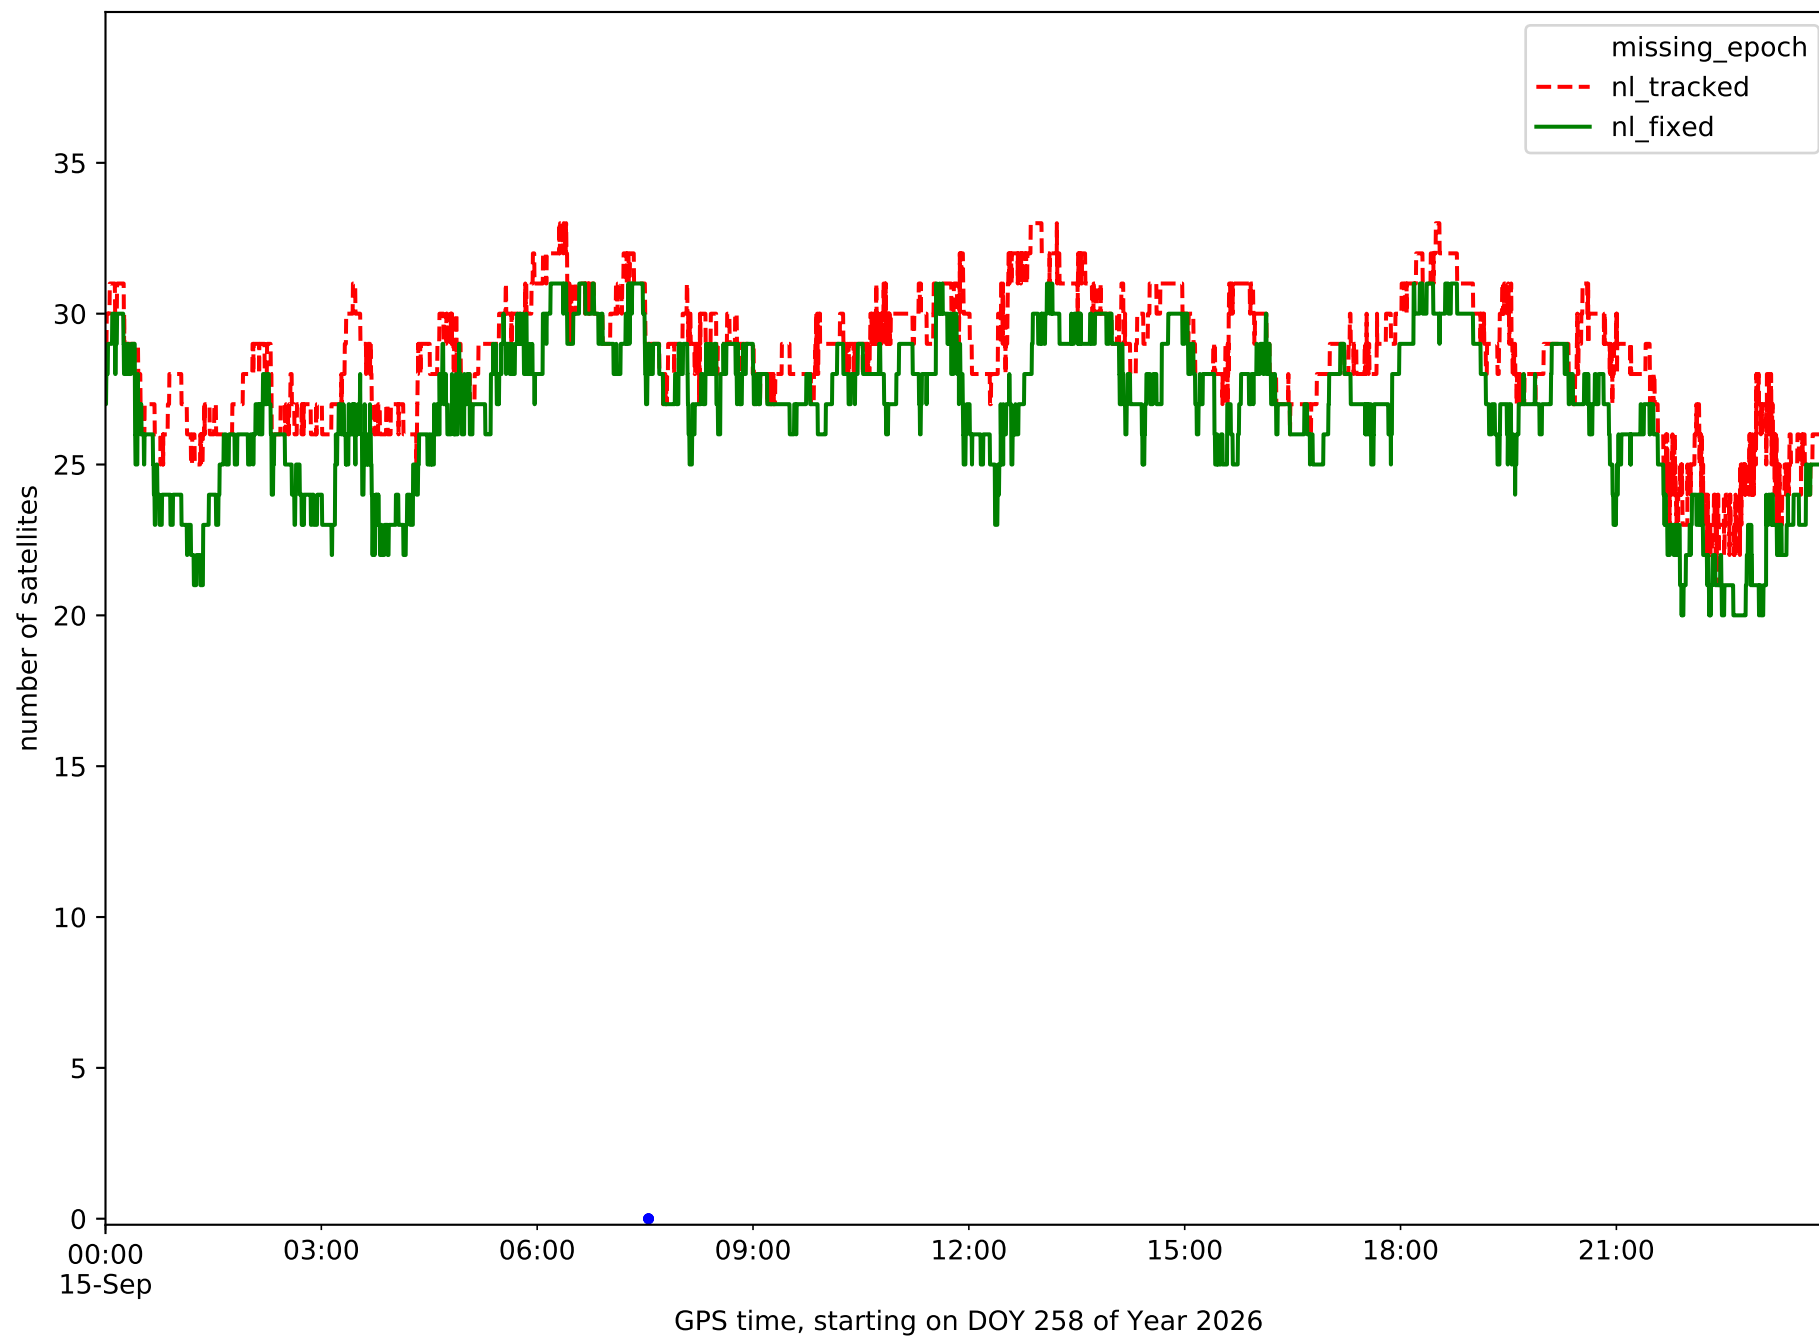


Station LRES in network NT32

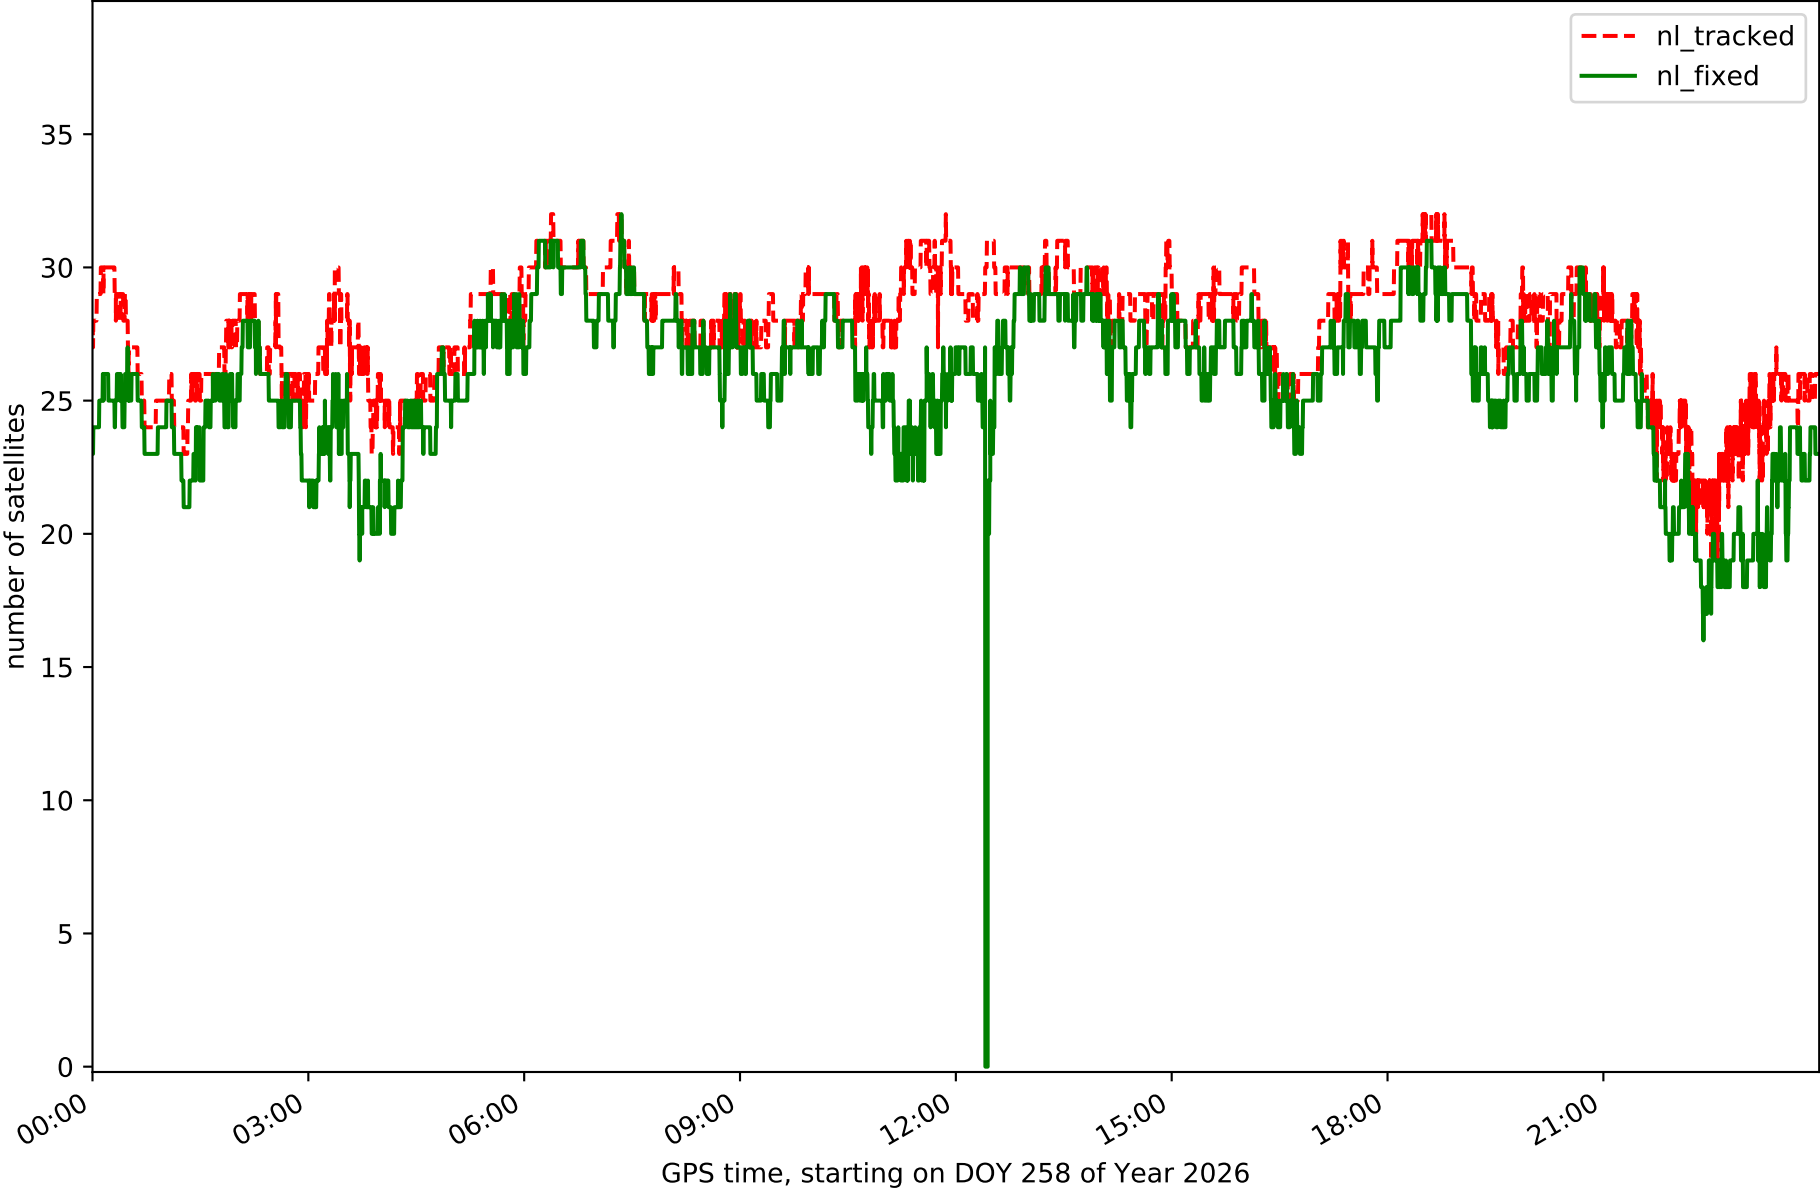


Station TN01 in network NT32

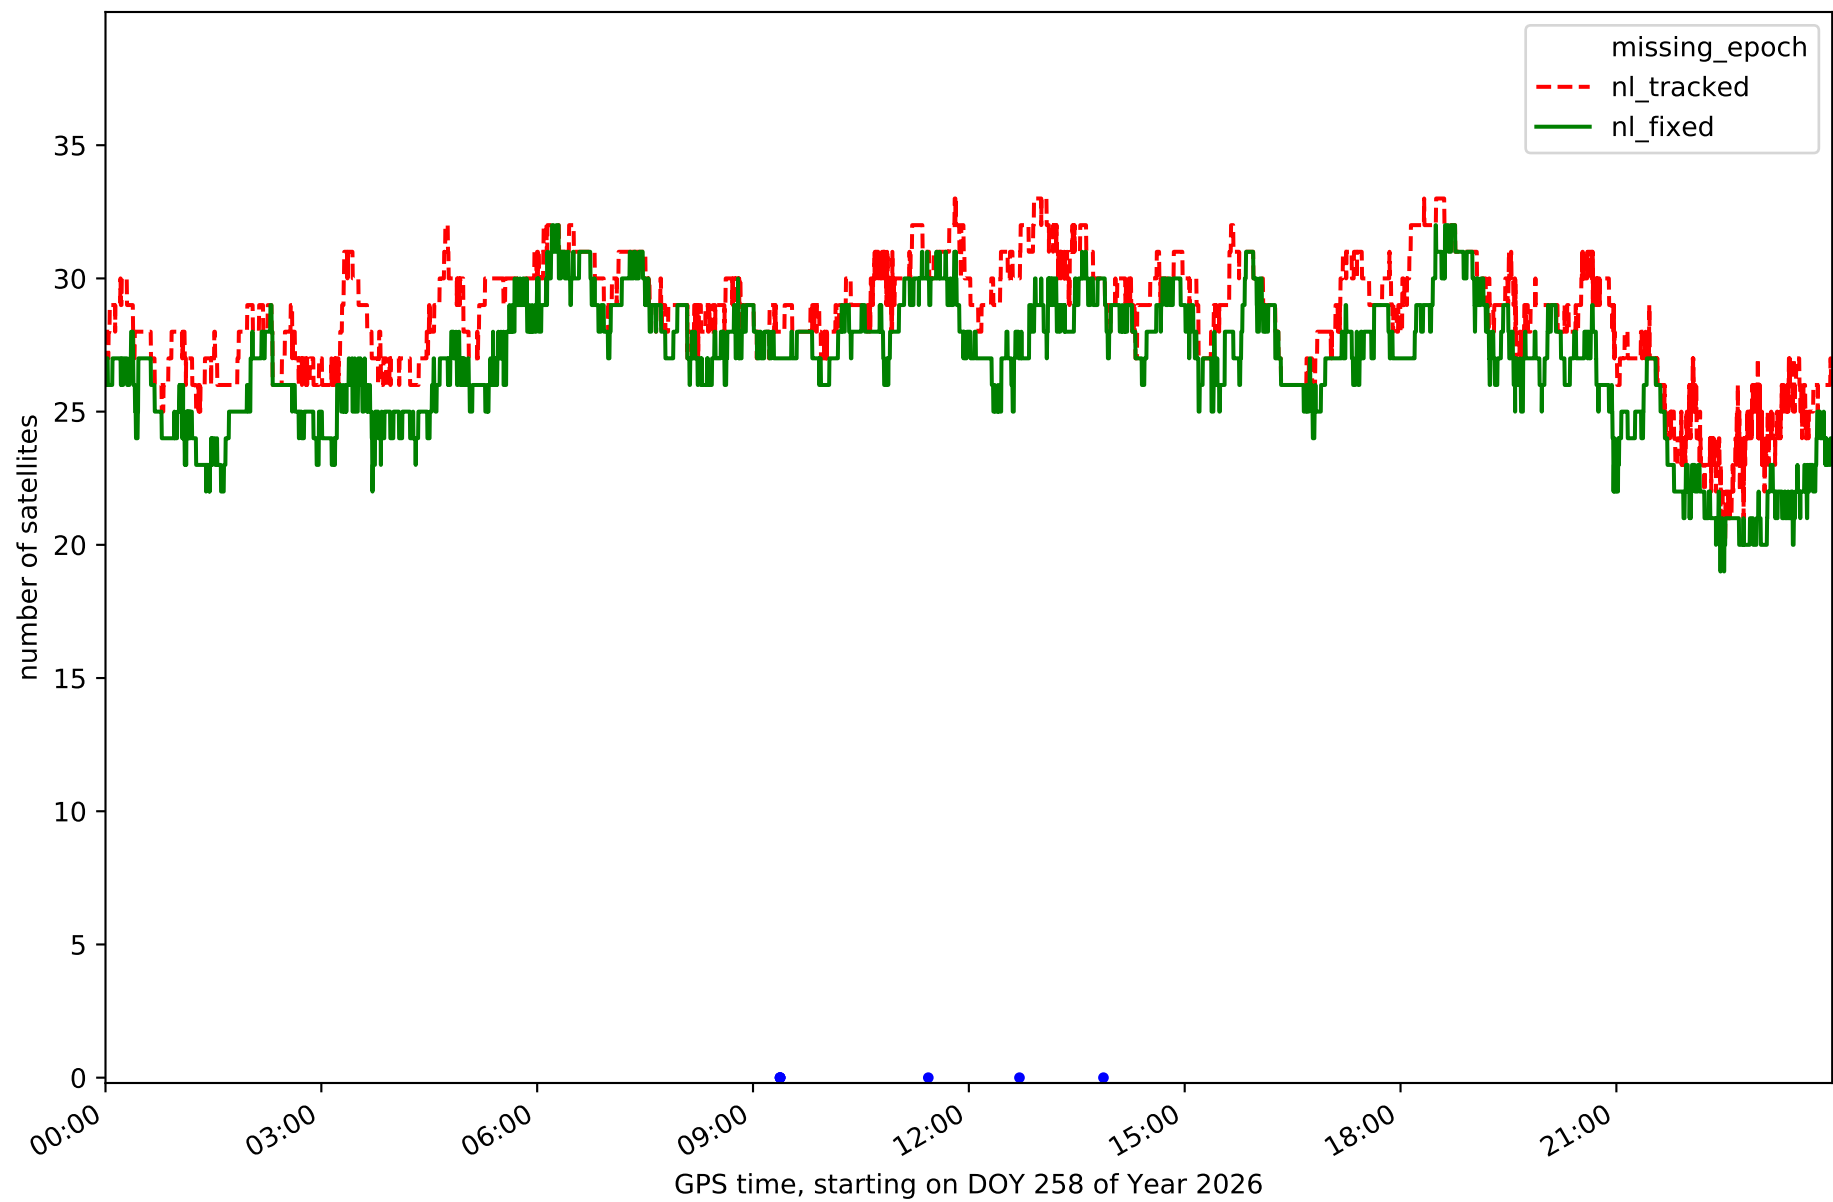


Station TN02 in network NT32

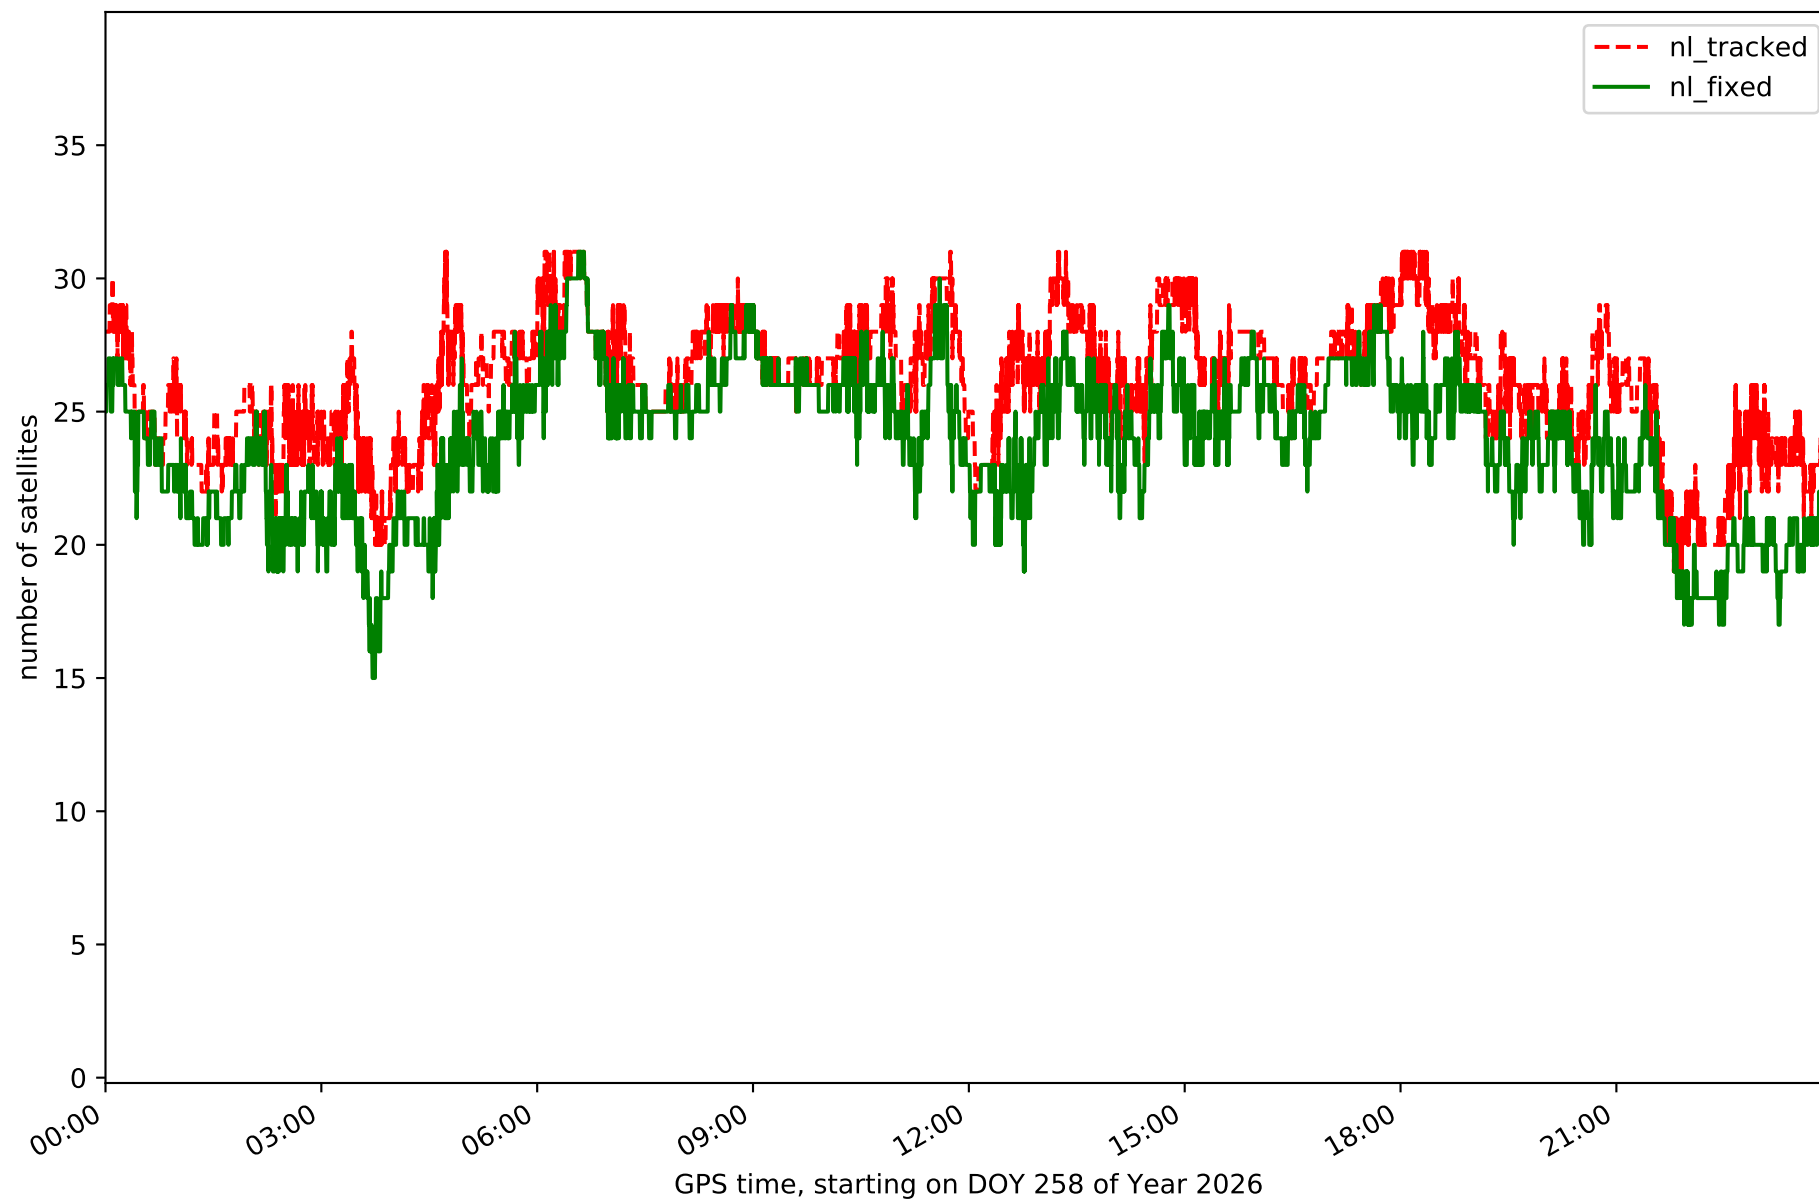


Station TN03 in network NT32

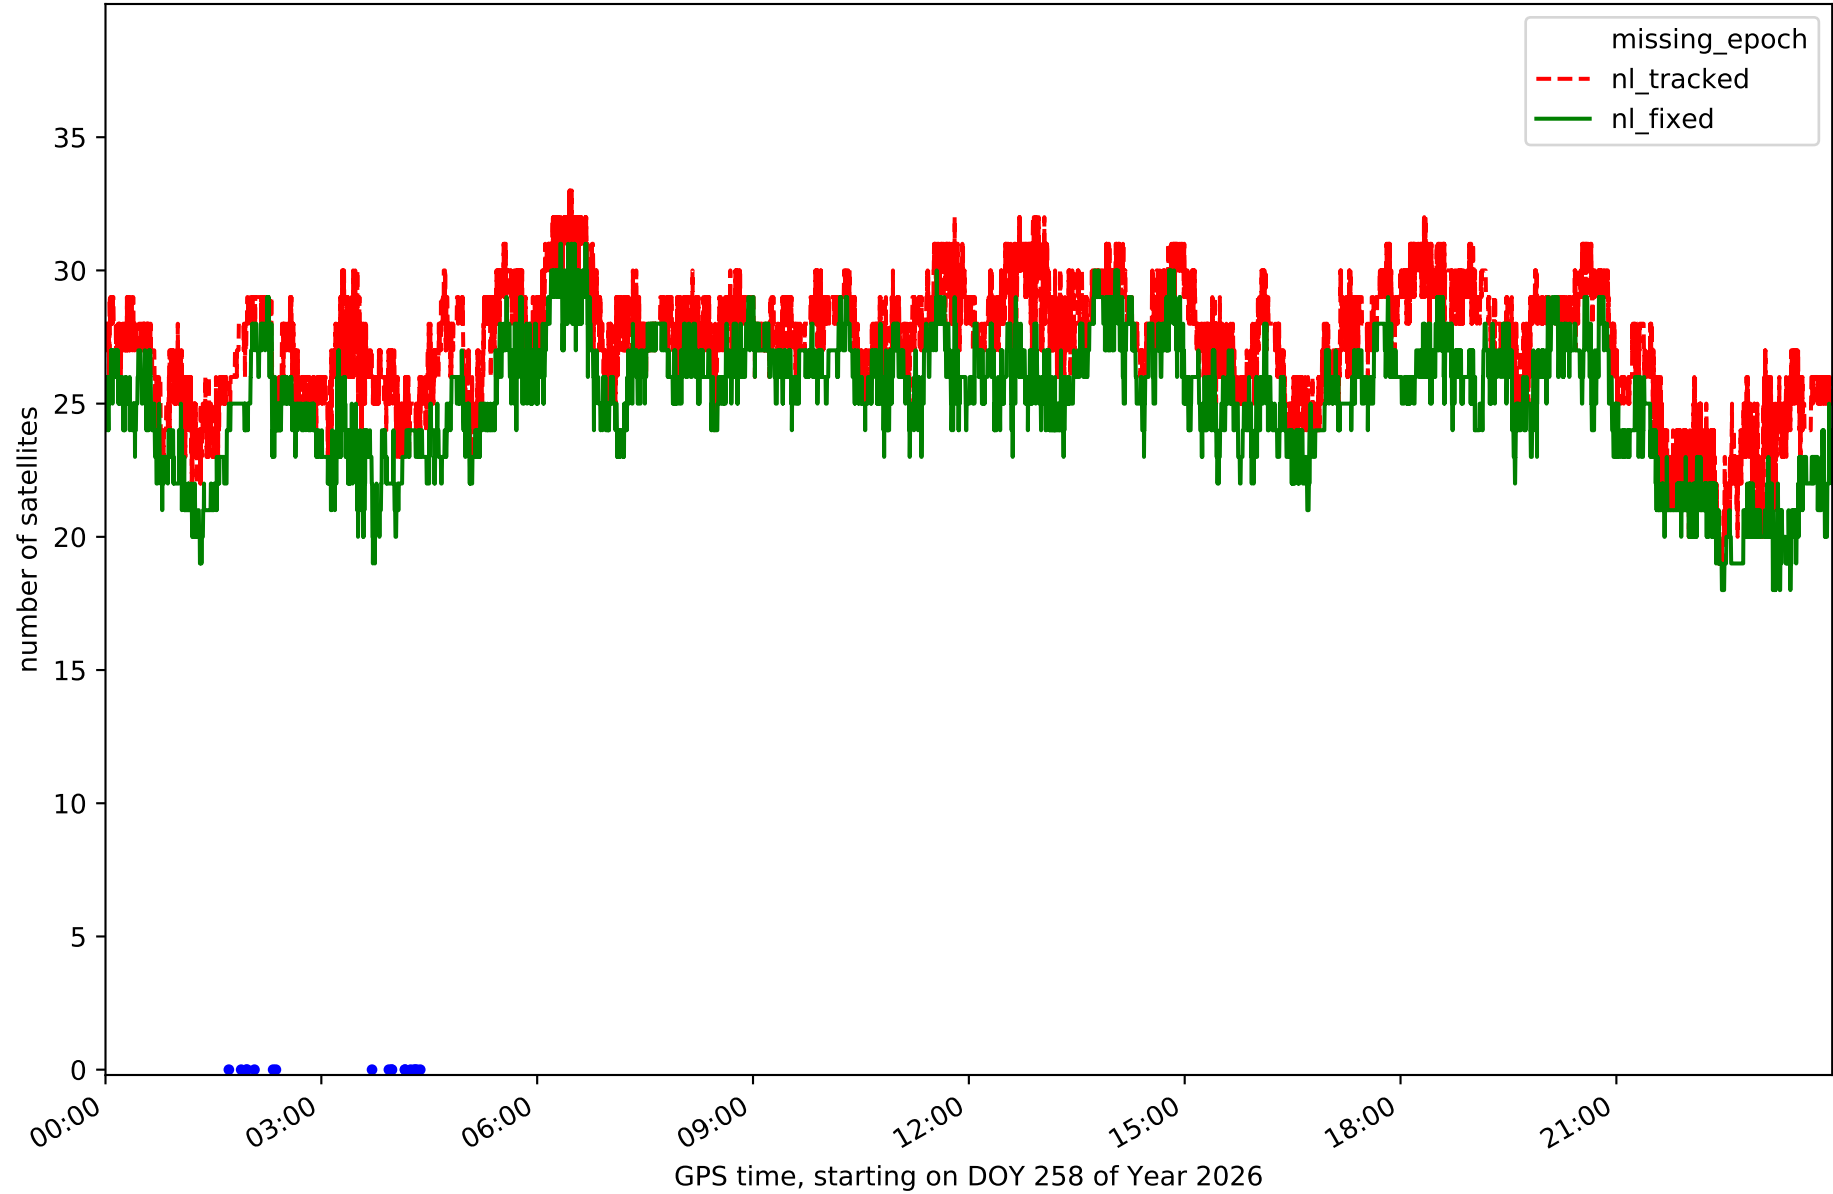


Station TN06 in network NT32

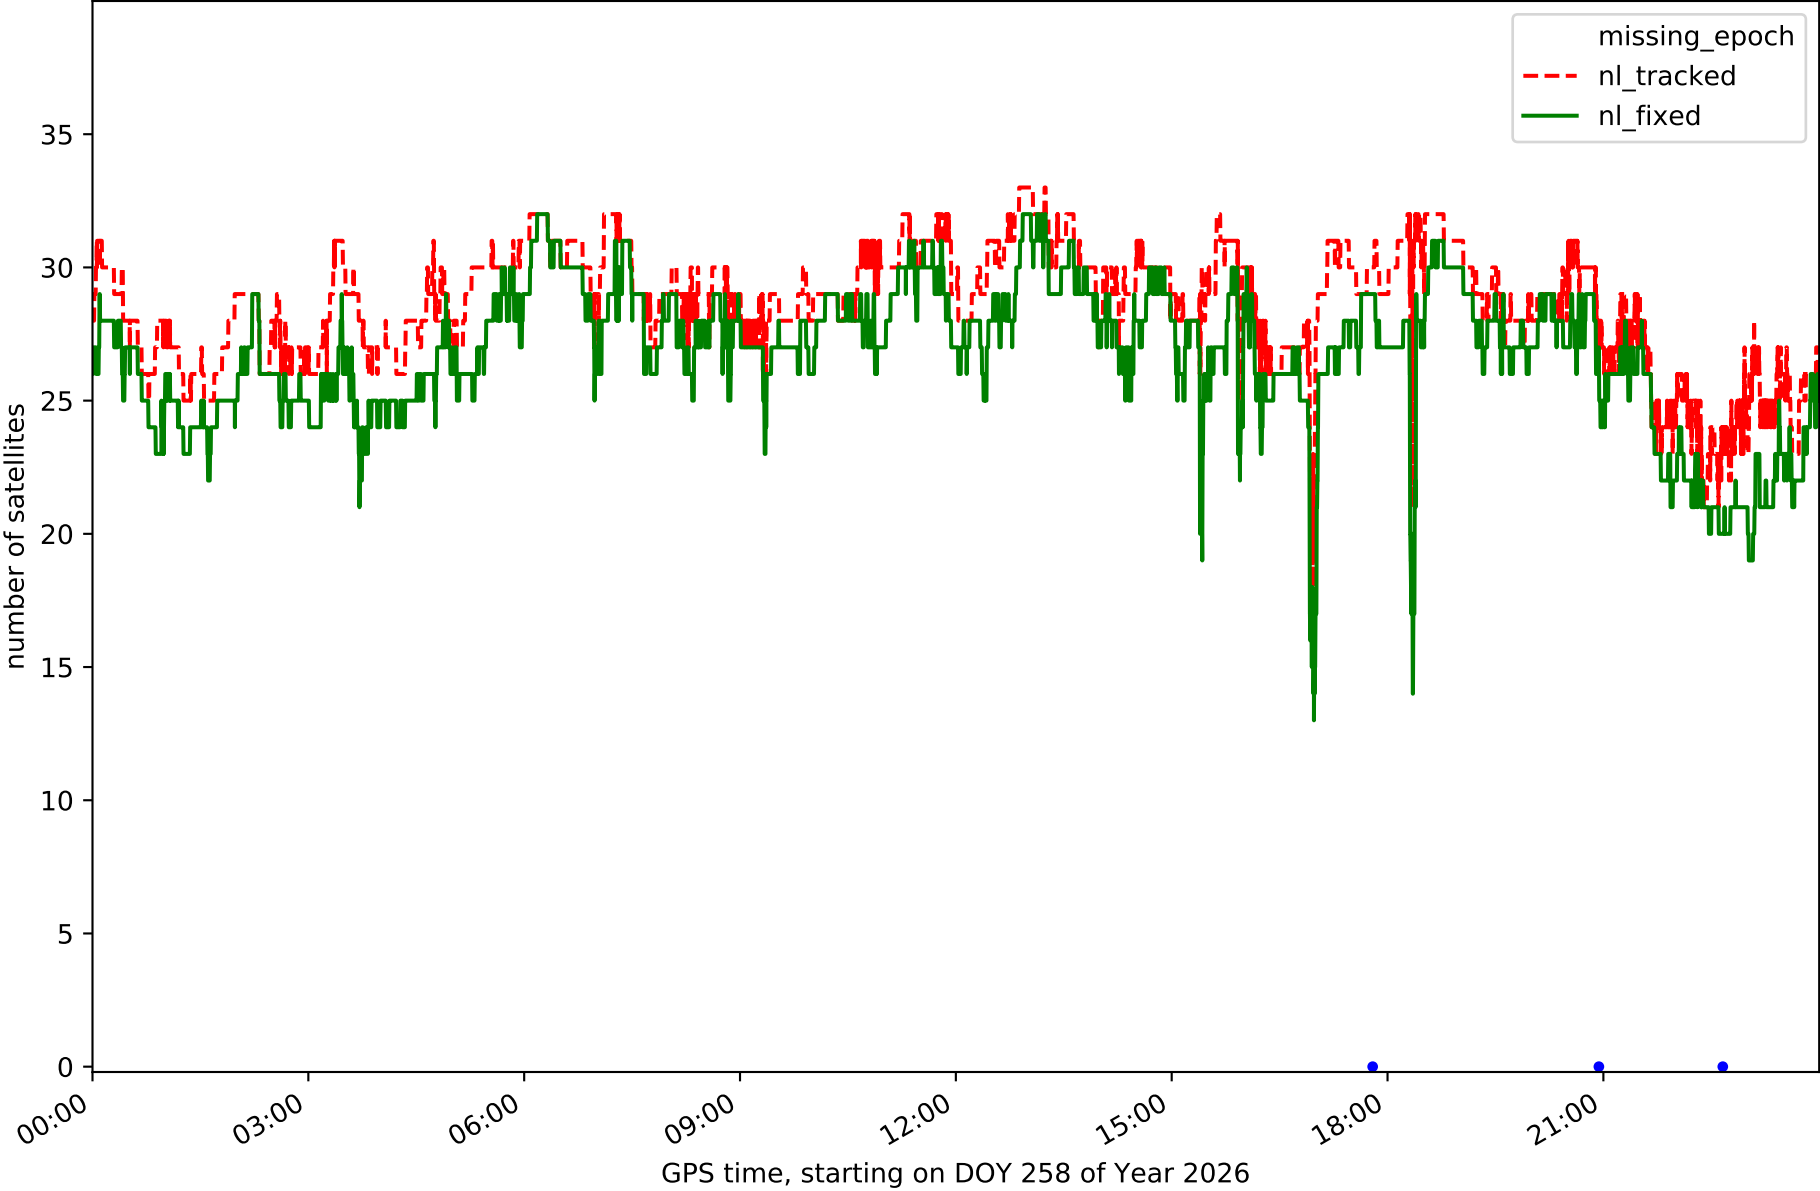


Station TN09 in network NT32

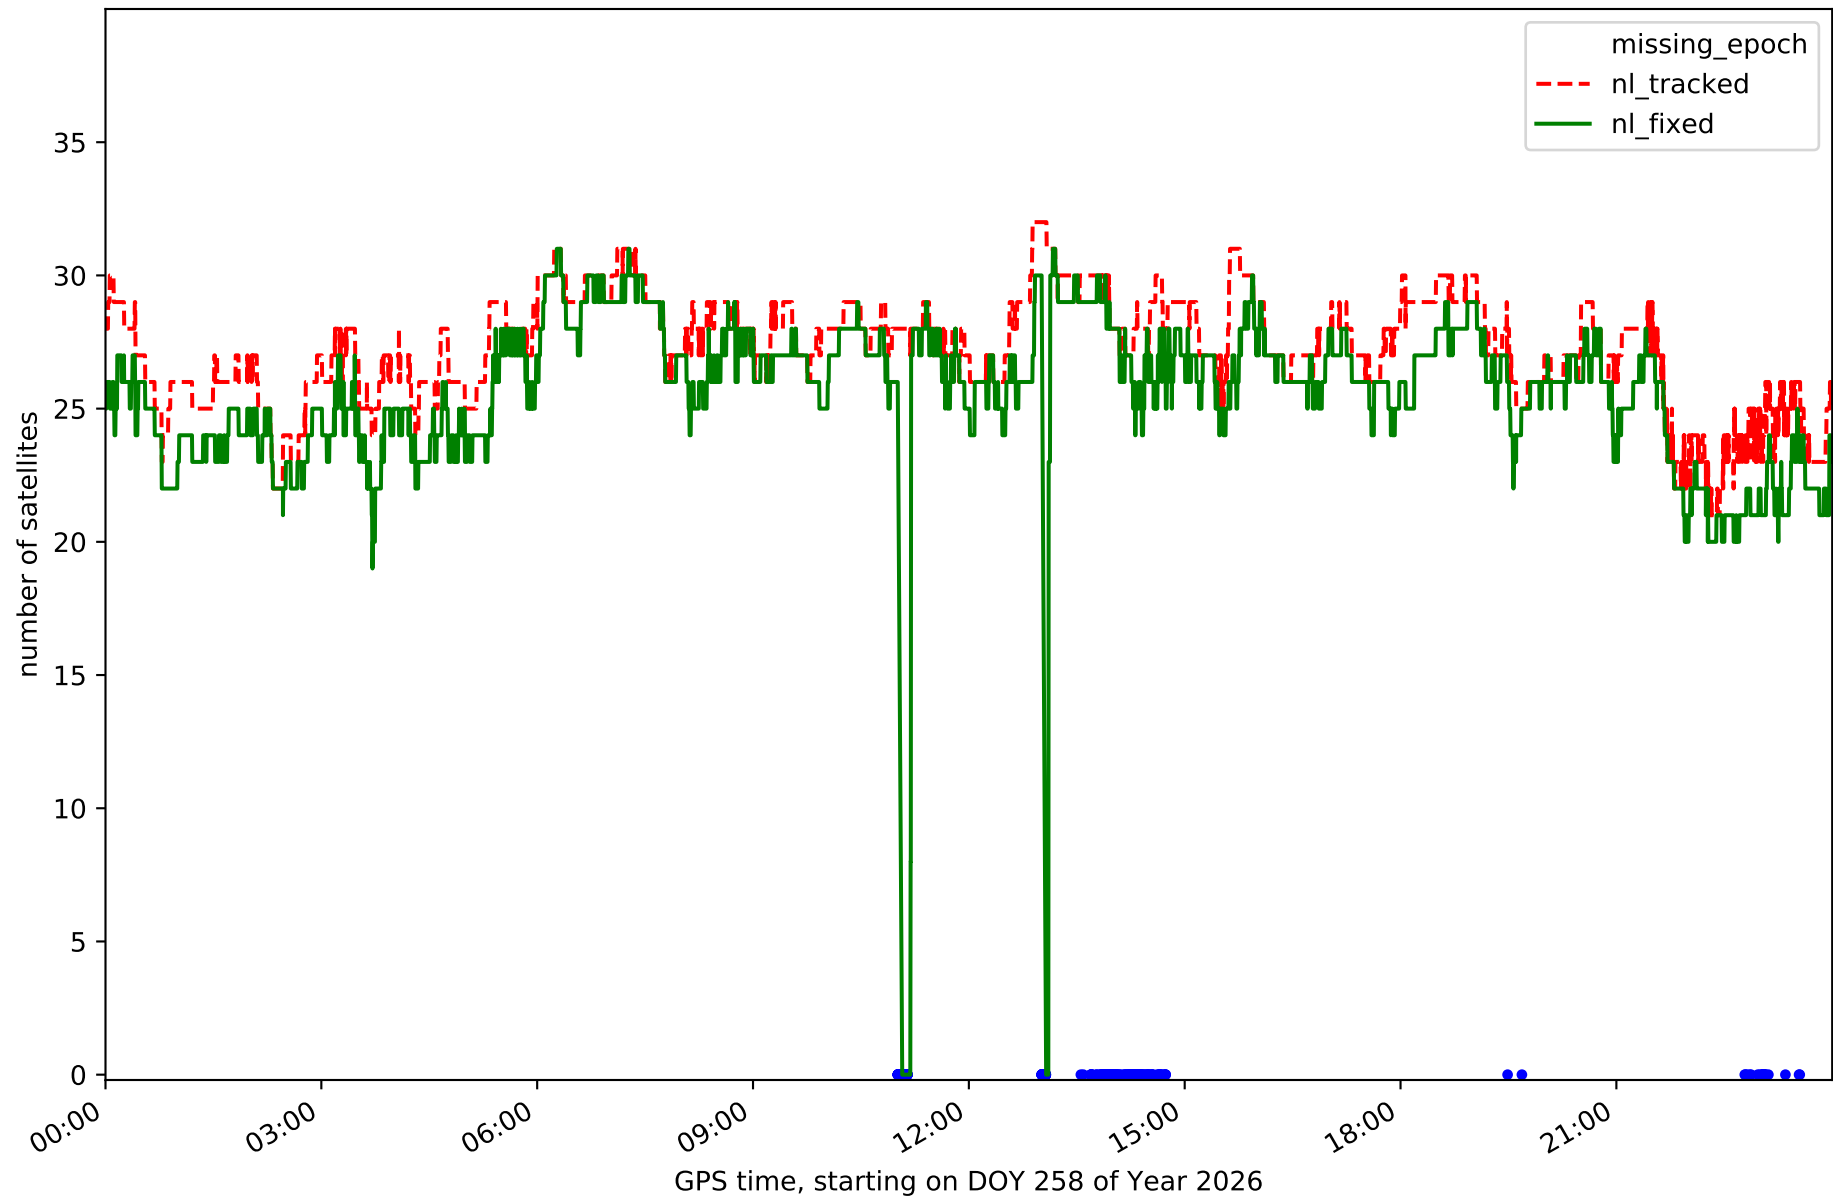


RefCheck for station EH01 in network NT32

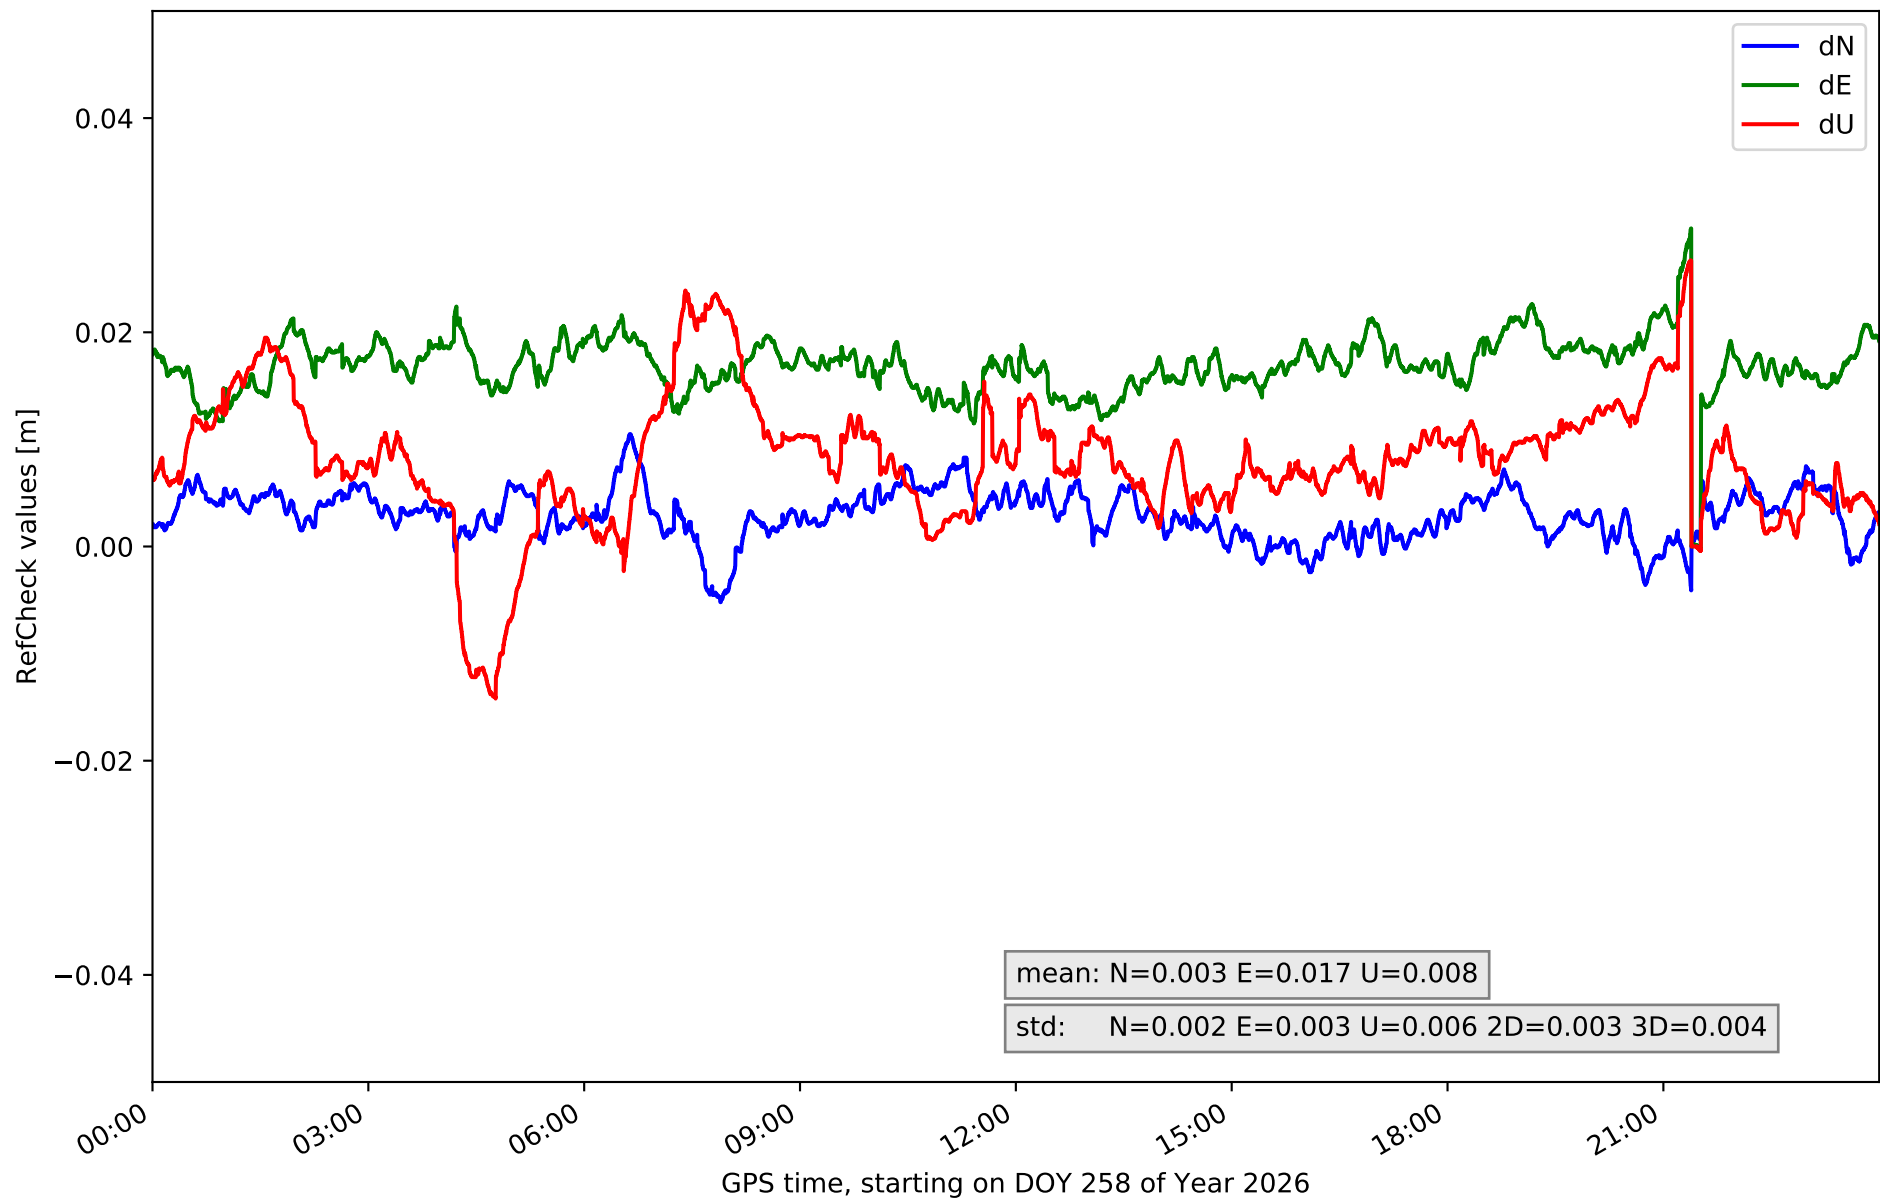


RefCheck for station EH02 in network NT32

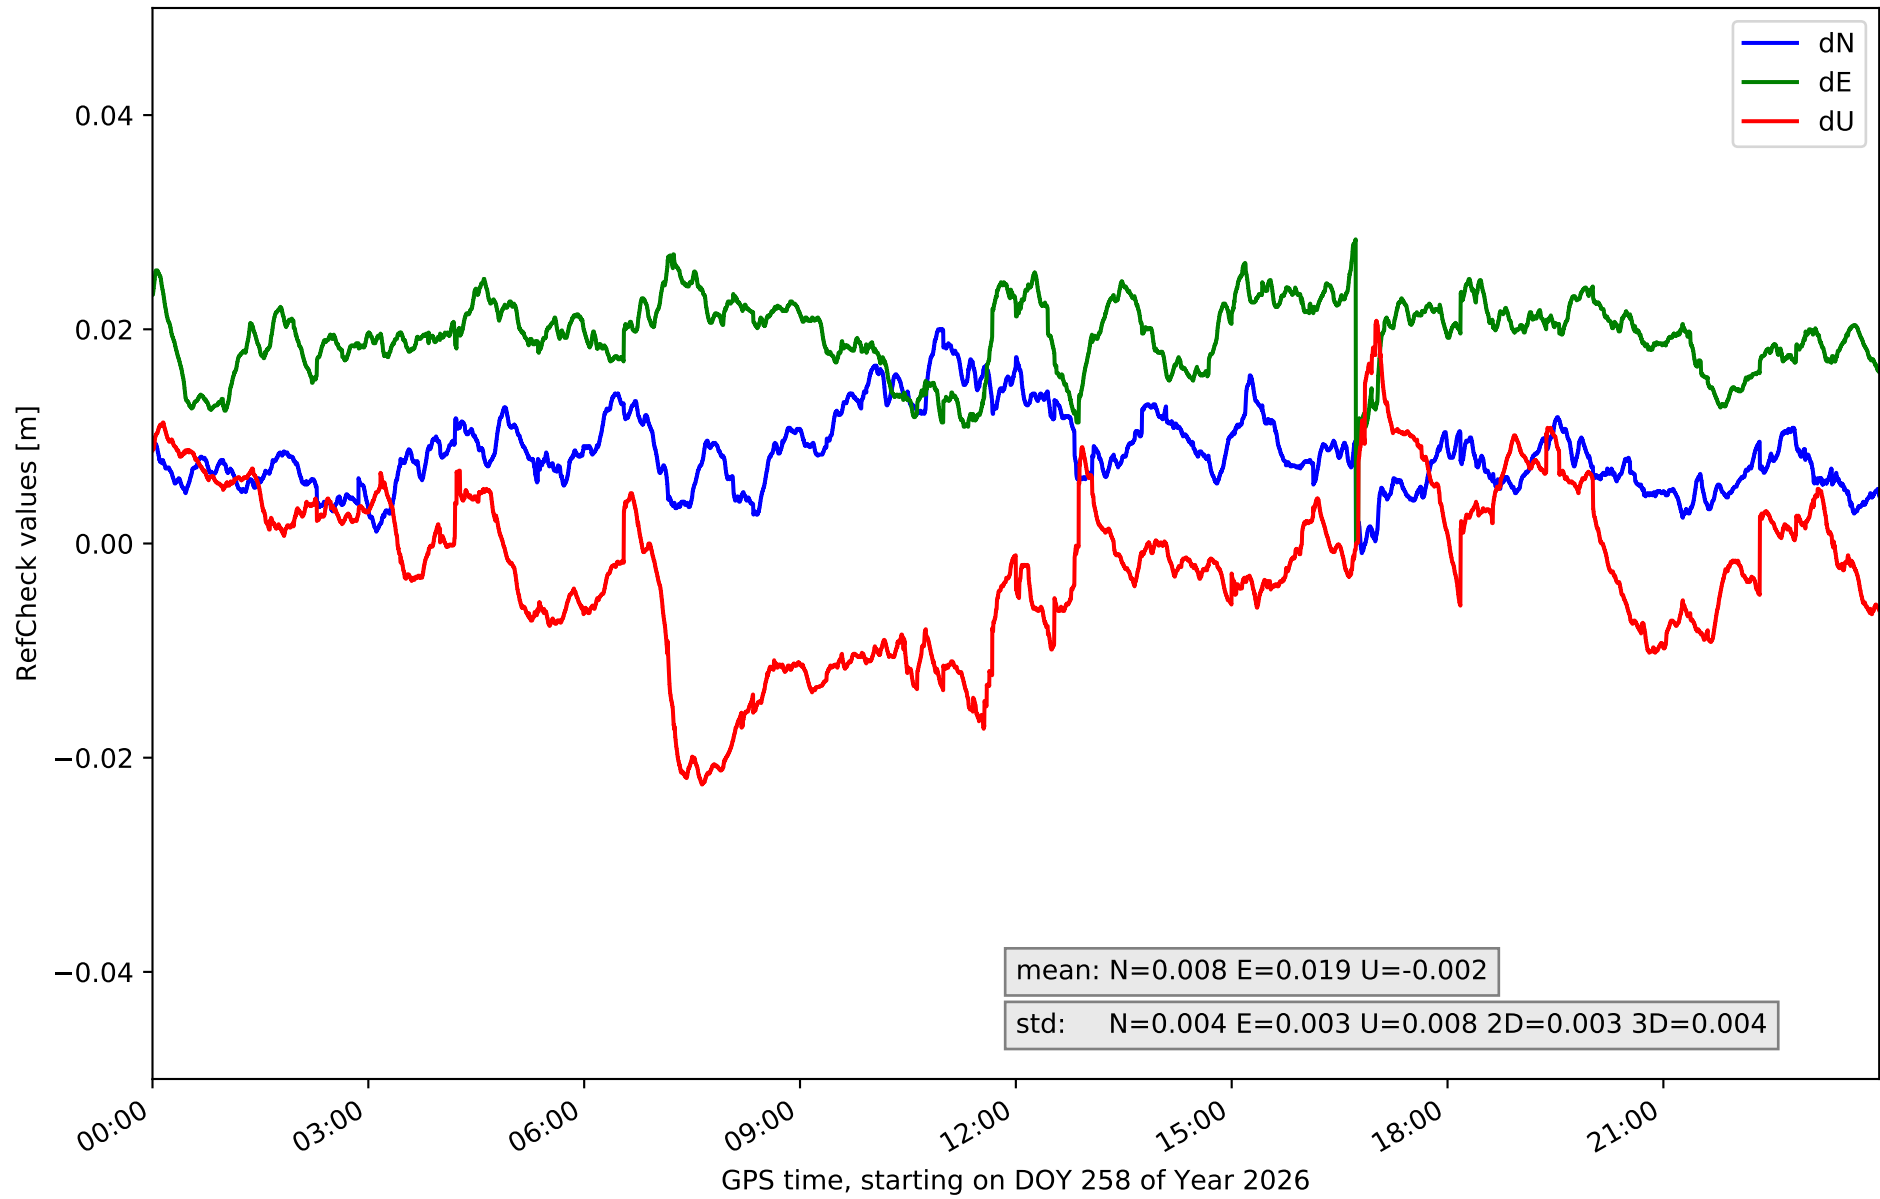


RefCheck for station GOM1 in network NT32

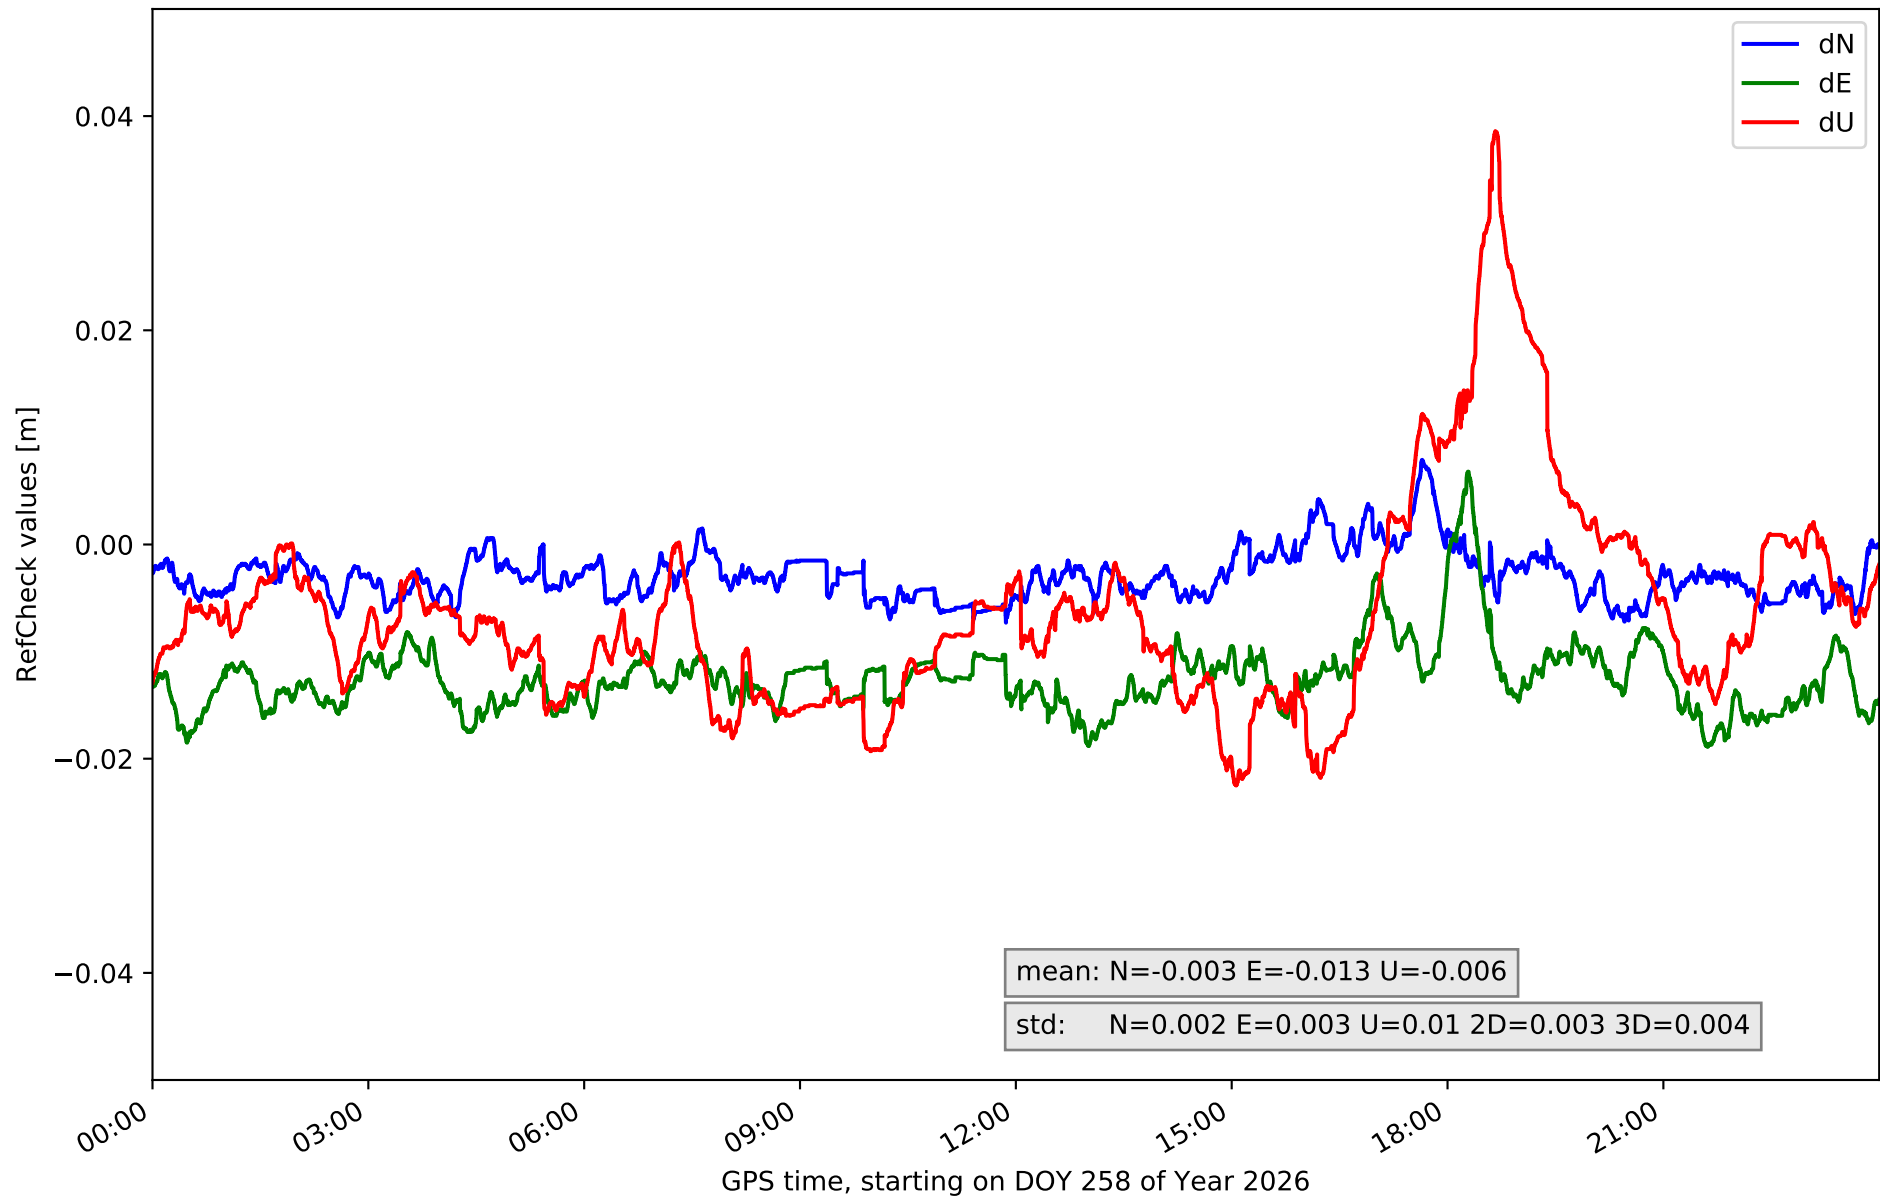


RefCheck for station GOME in network NT32

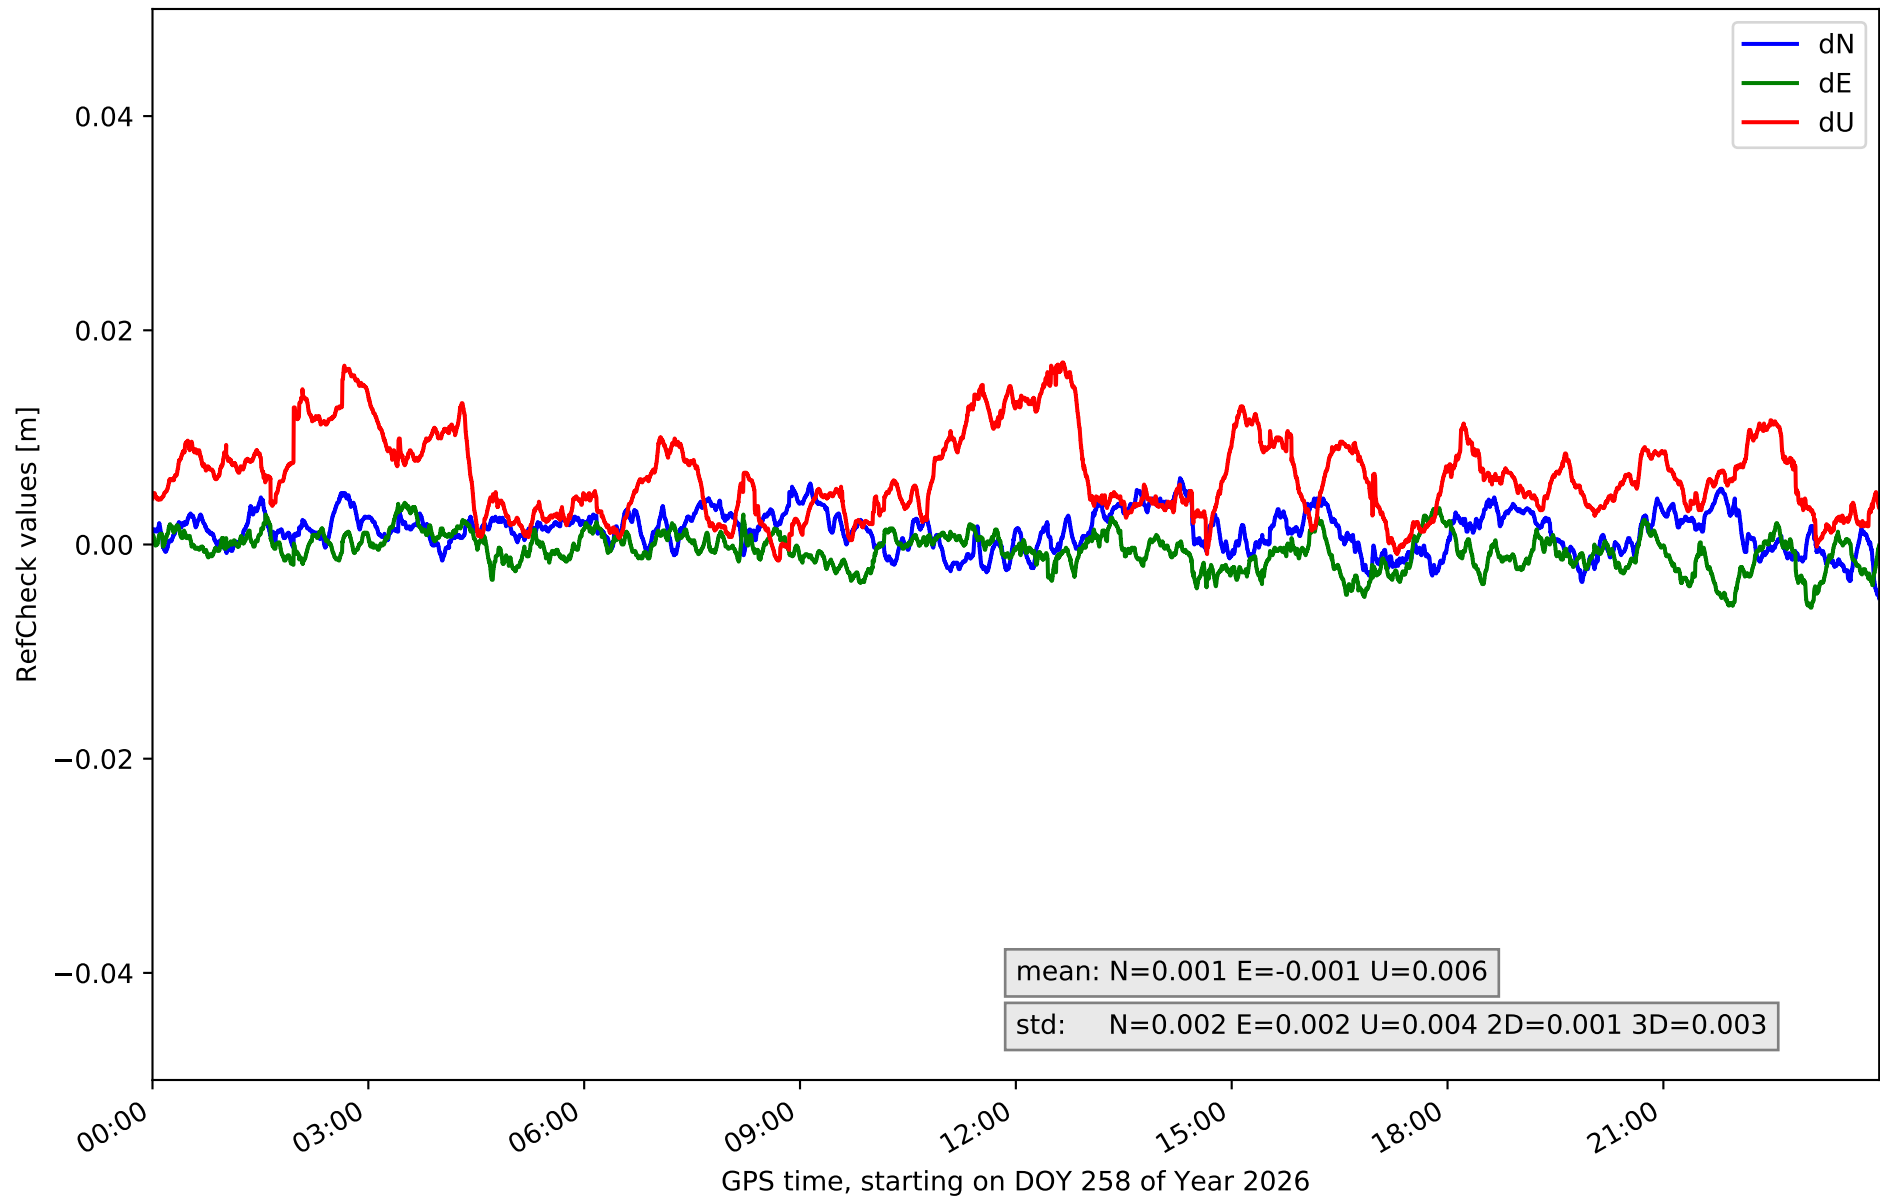


RefCheck for station IZAN in network NT32

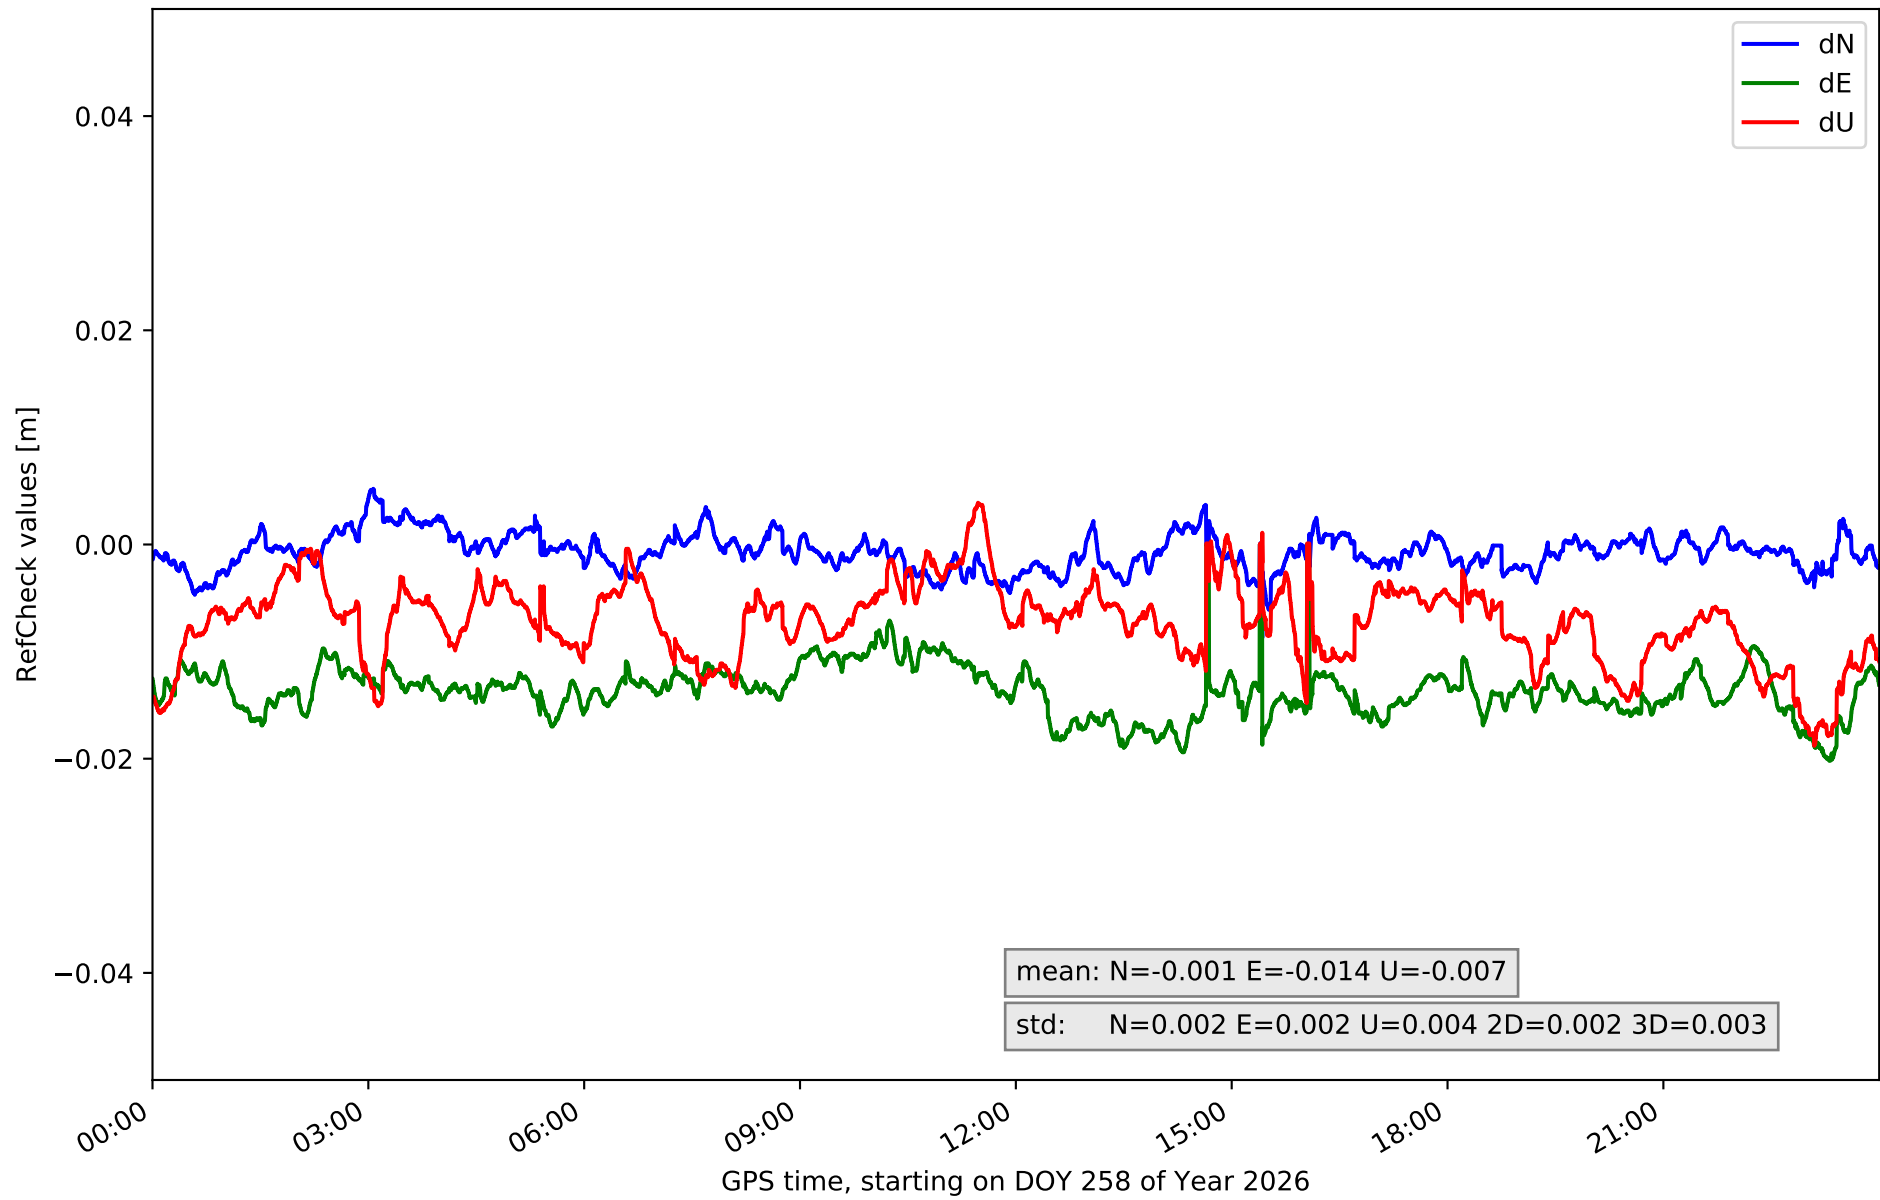


RefCheck for station LP01 in network NT32

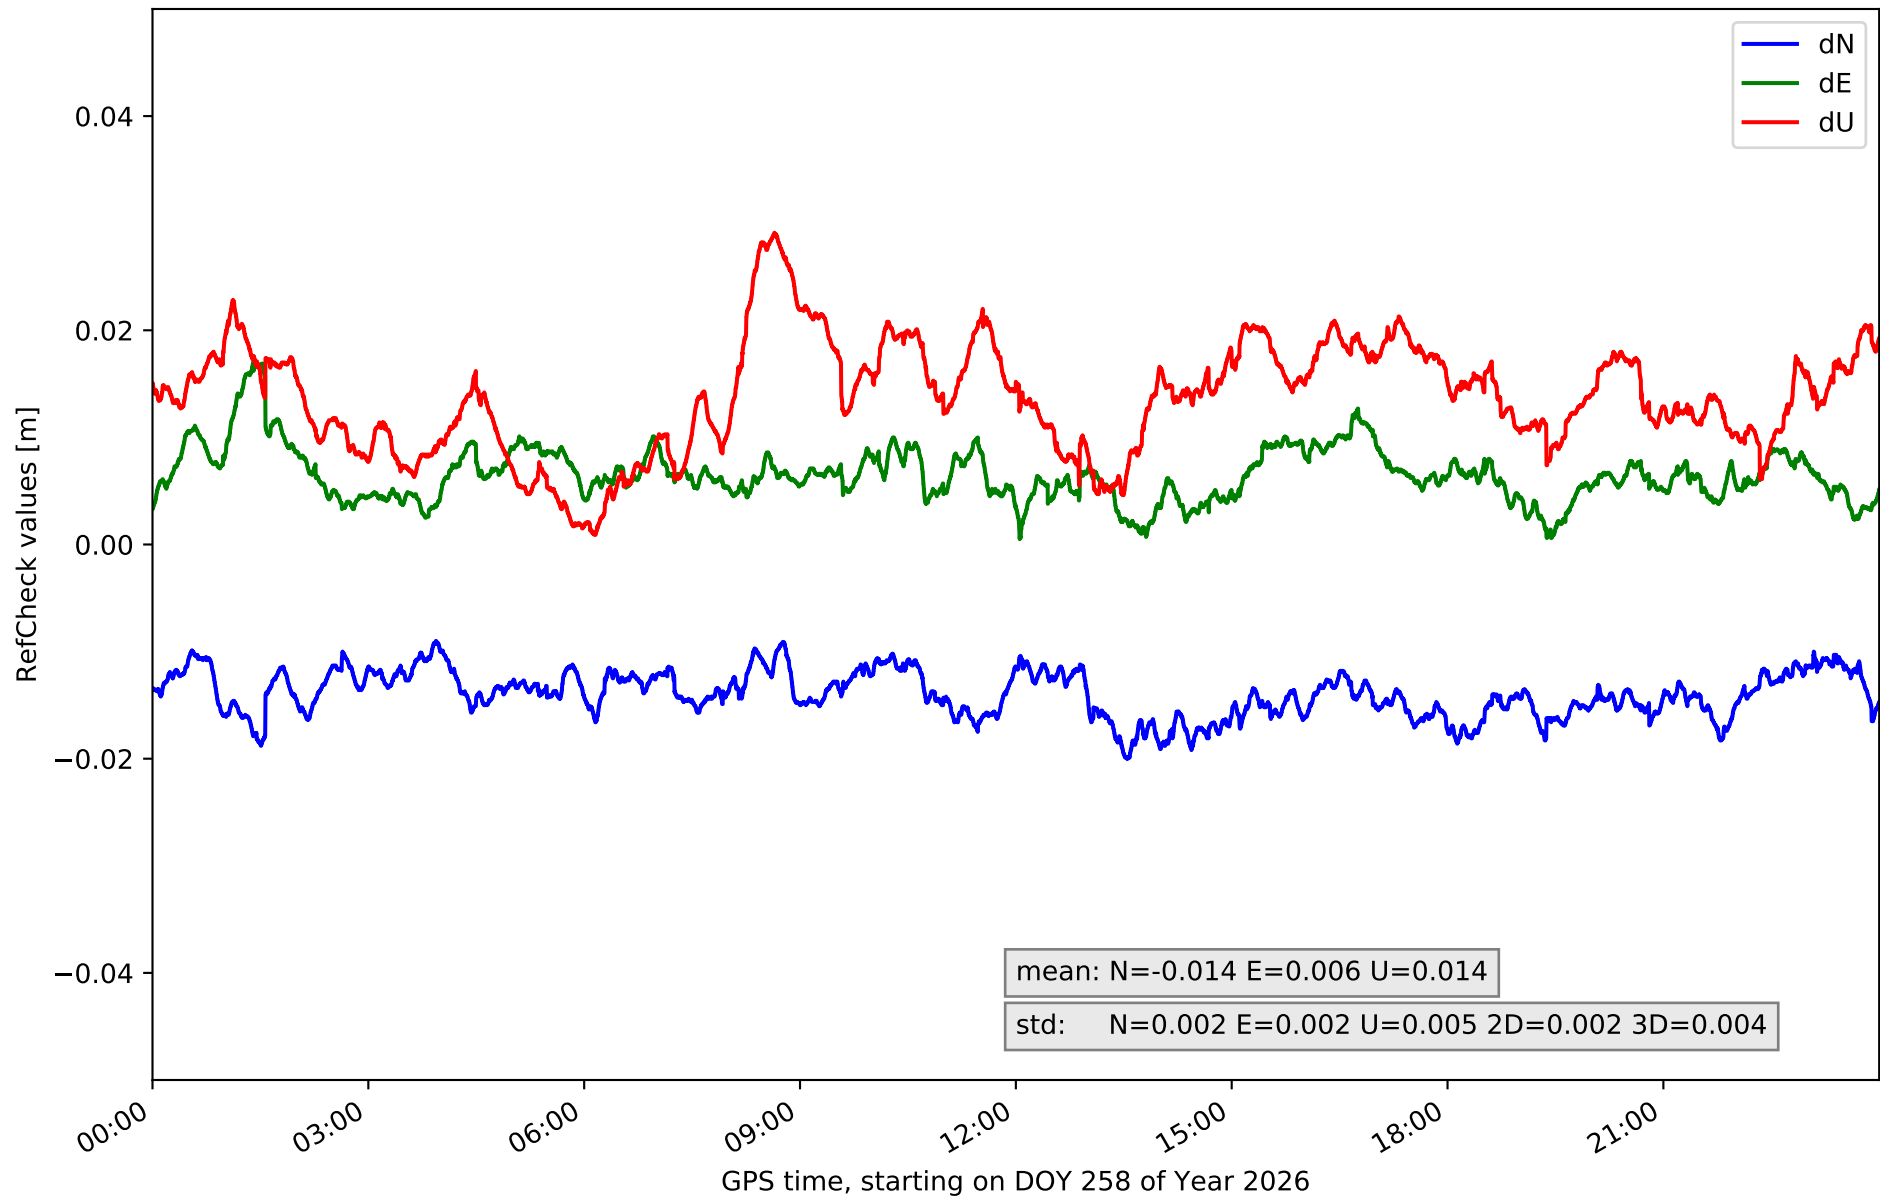


RefCheck for station LP03 in network NT32

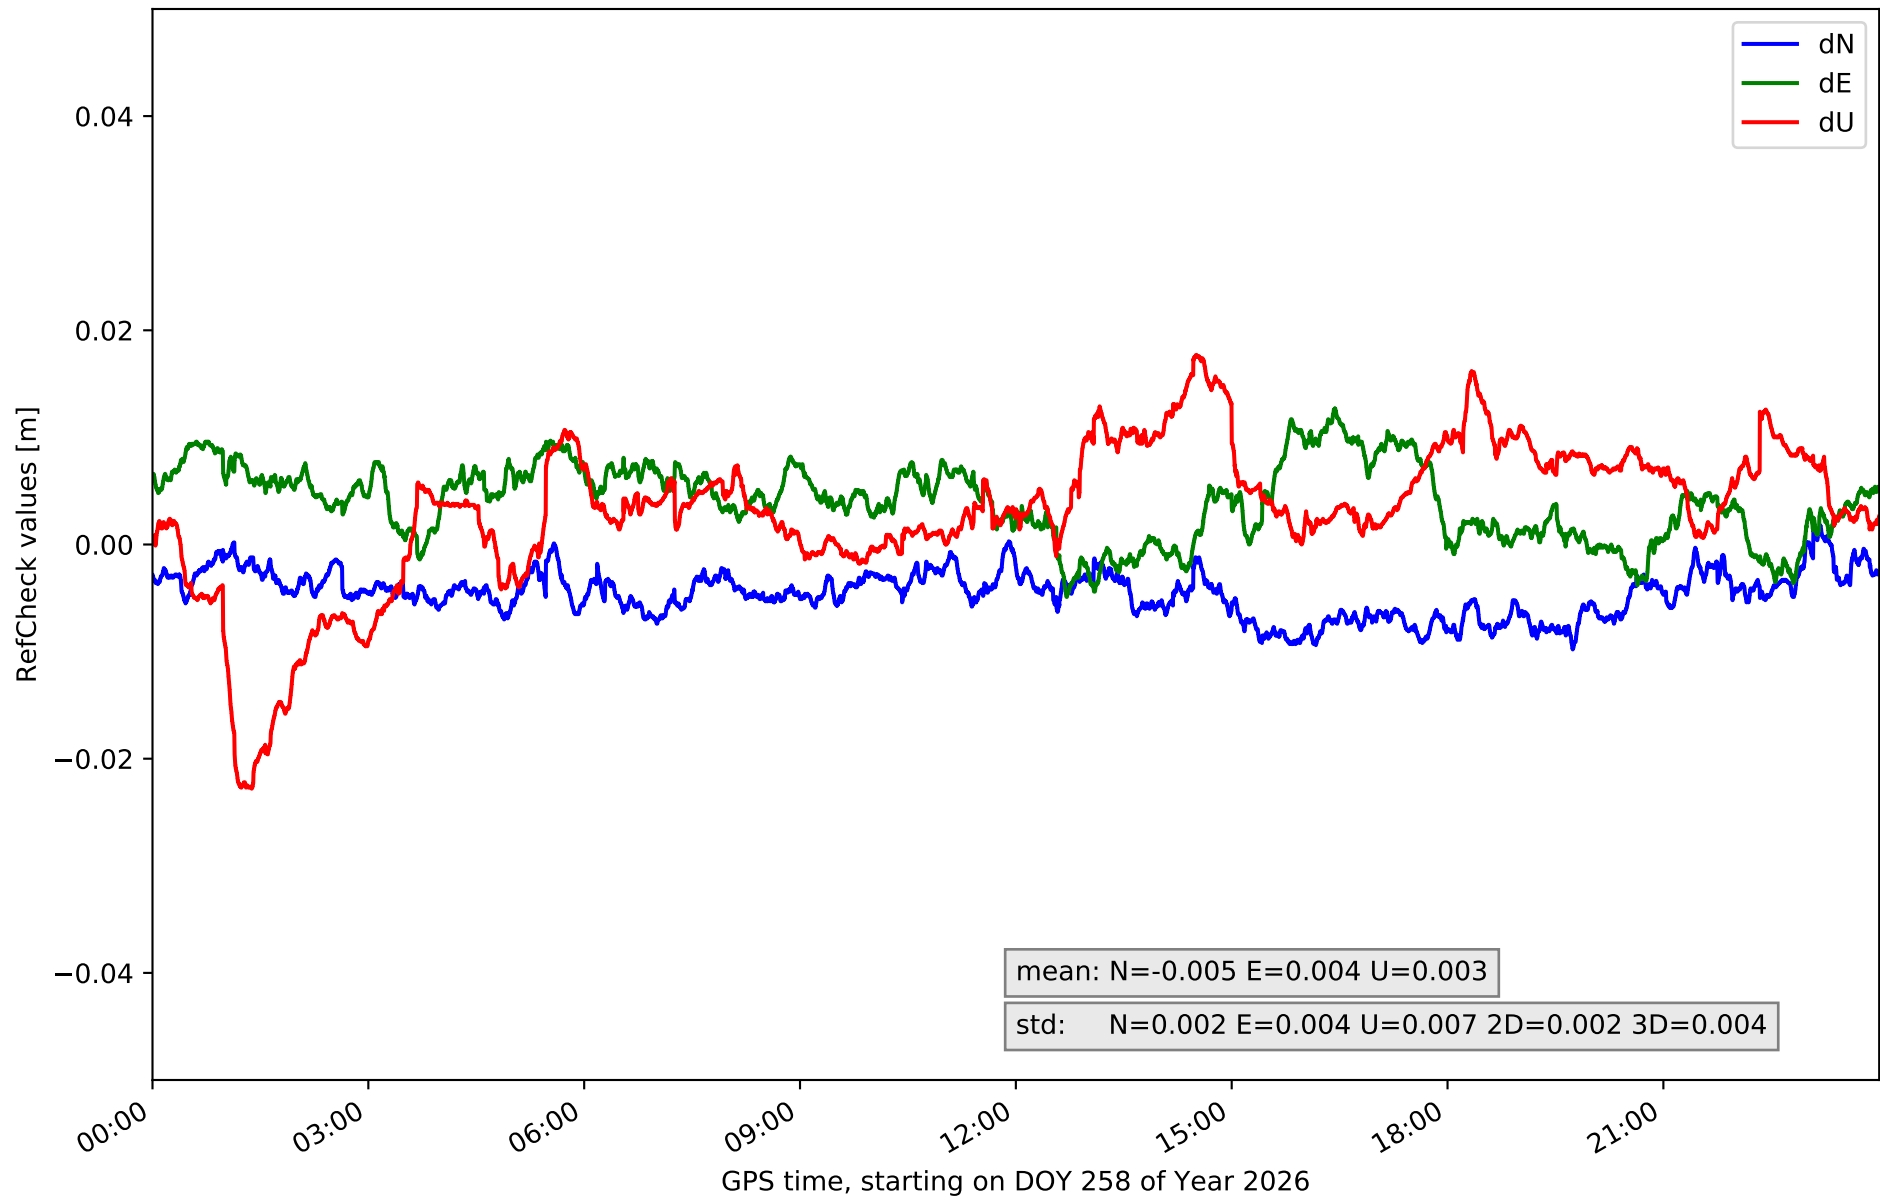


RefCheck for station LPAL in network NT32

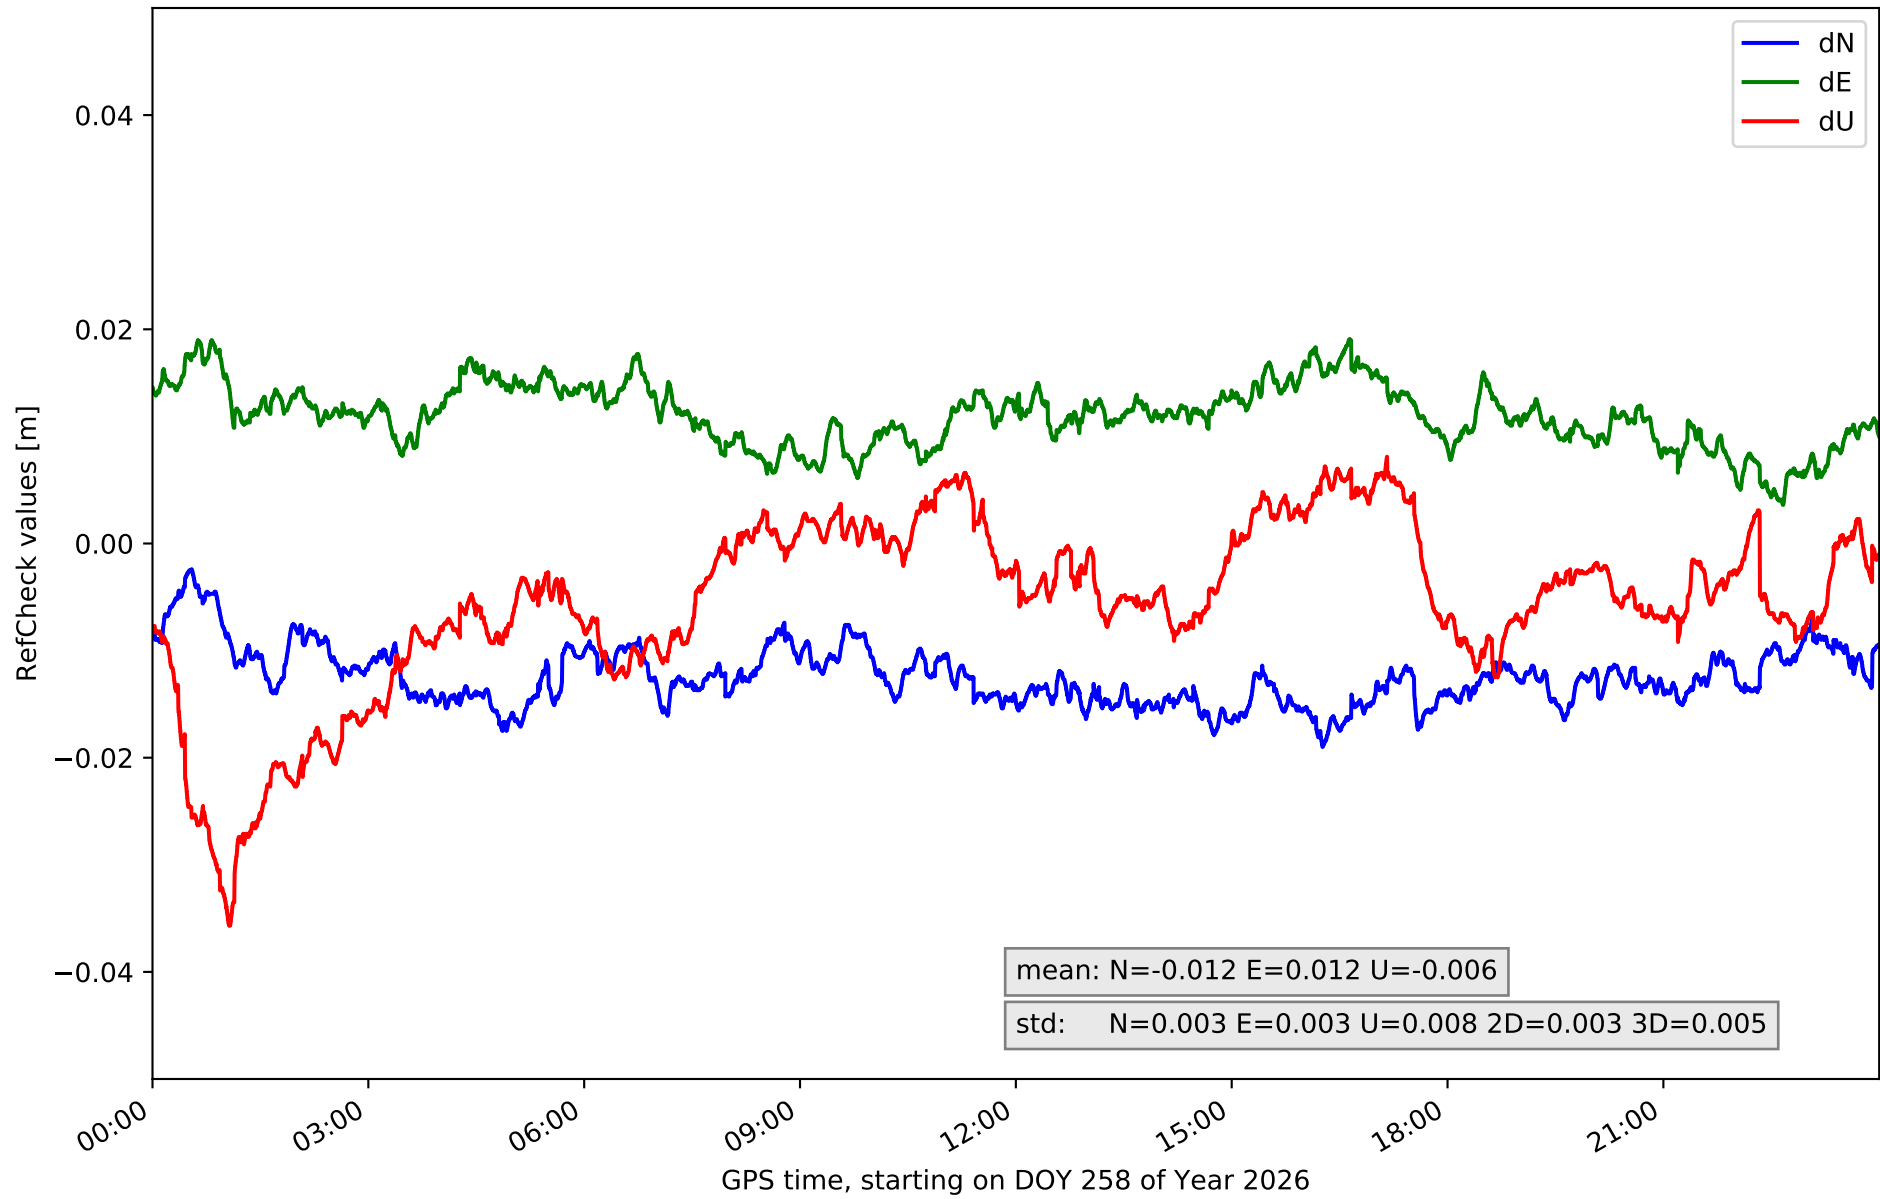


RefCheck for station LRES in network NT32

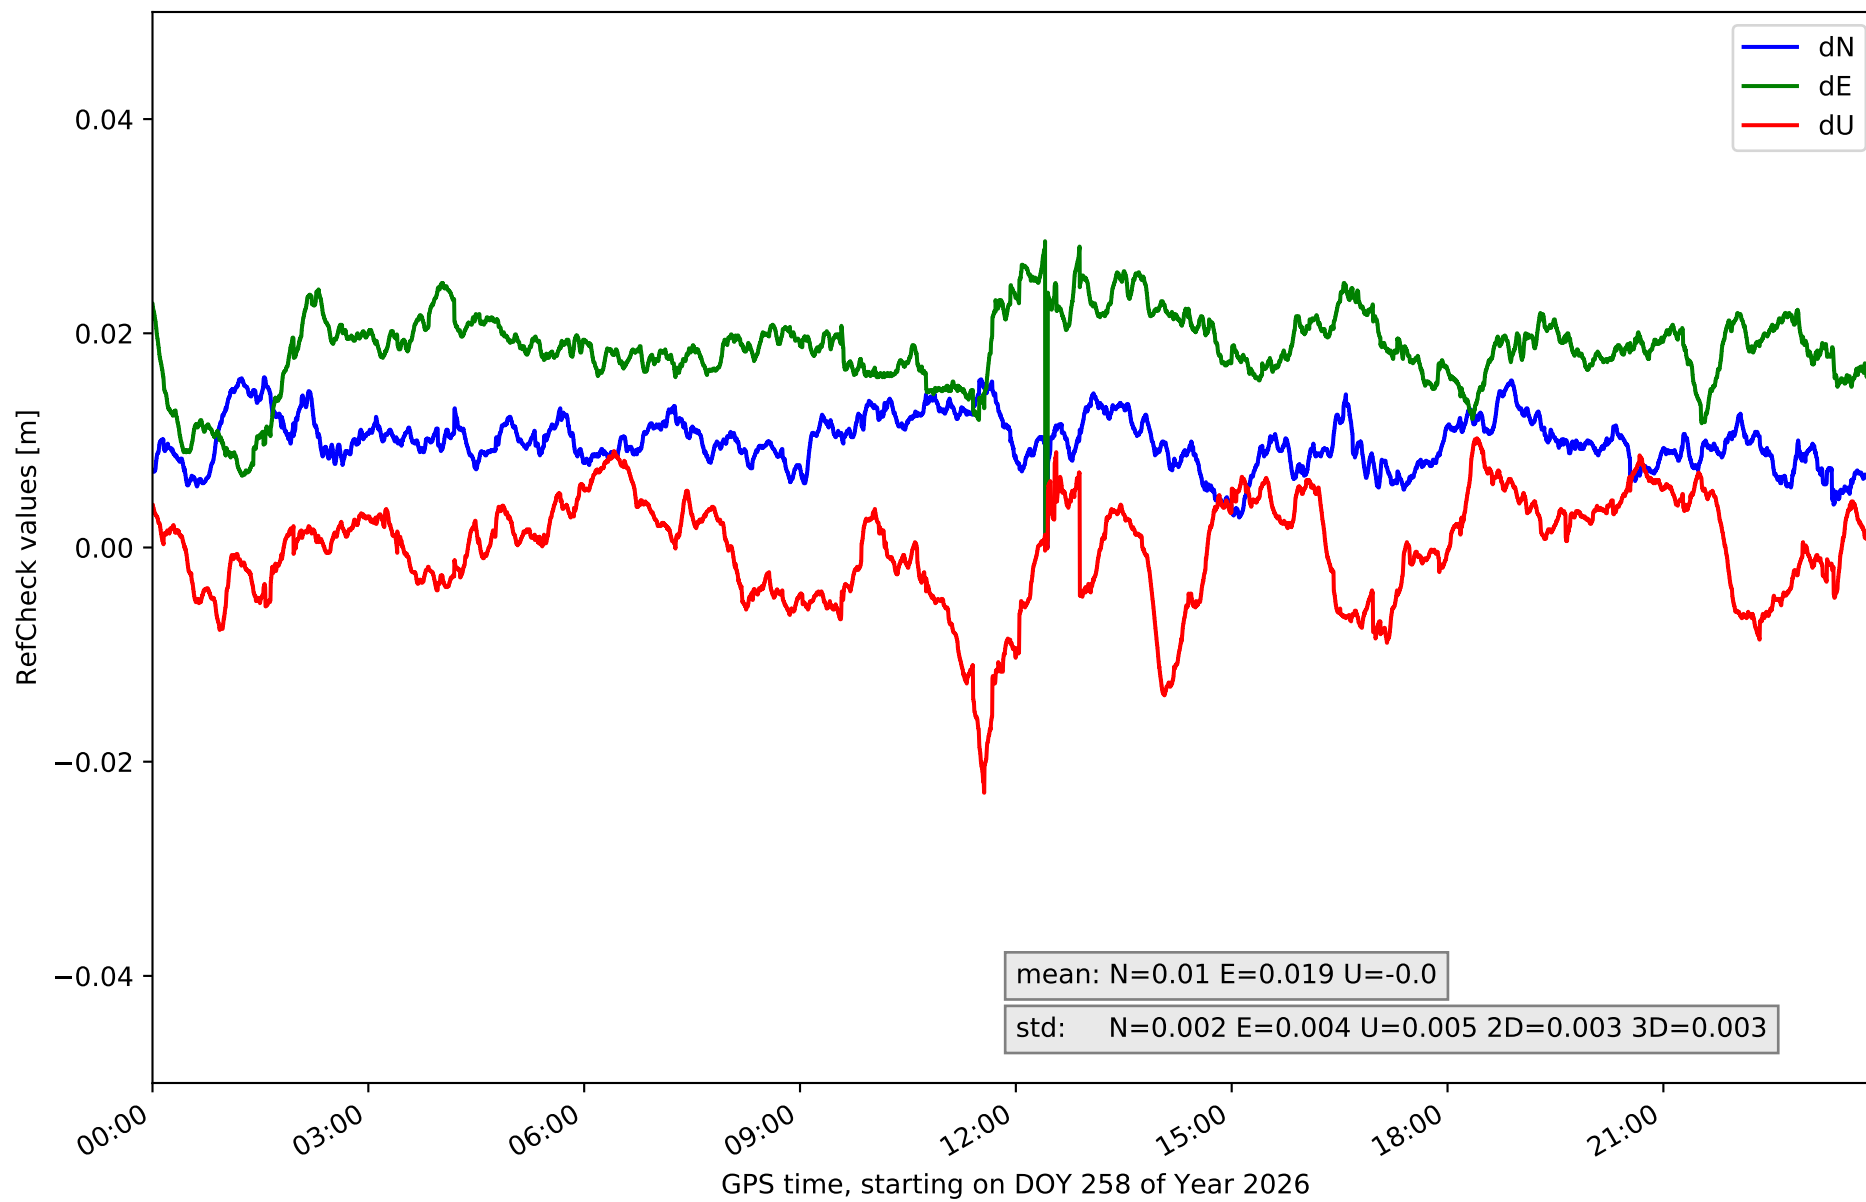


RefCheck for station TN01 in network NT32

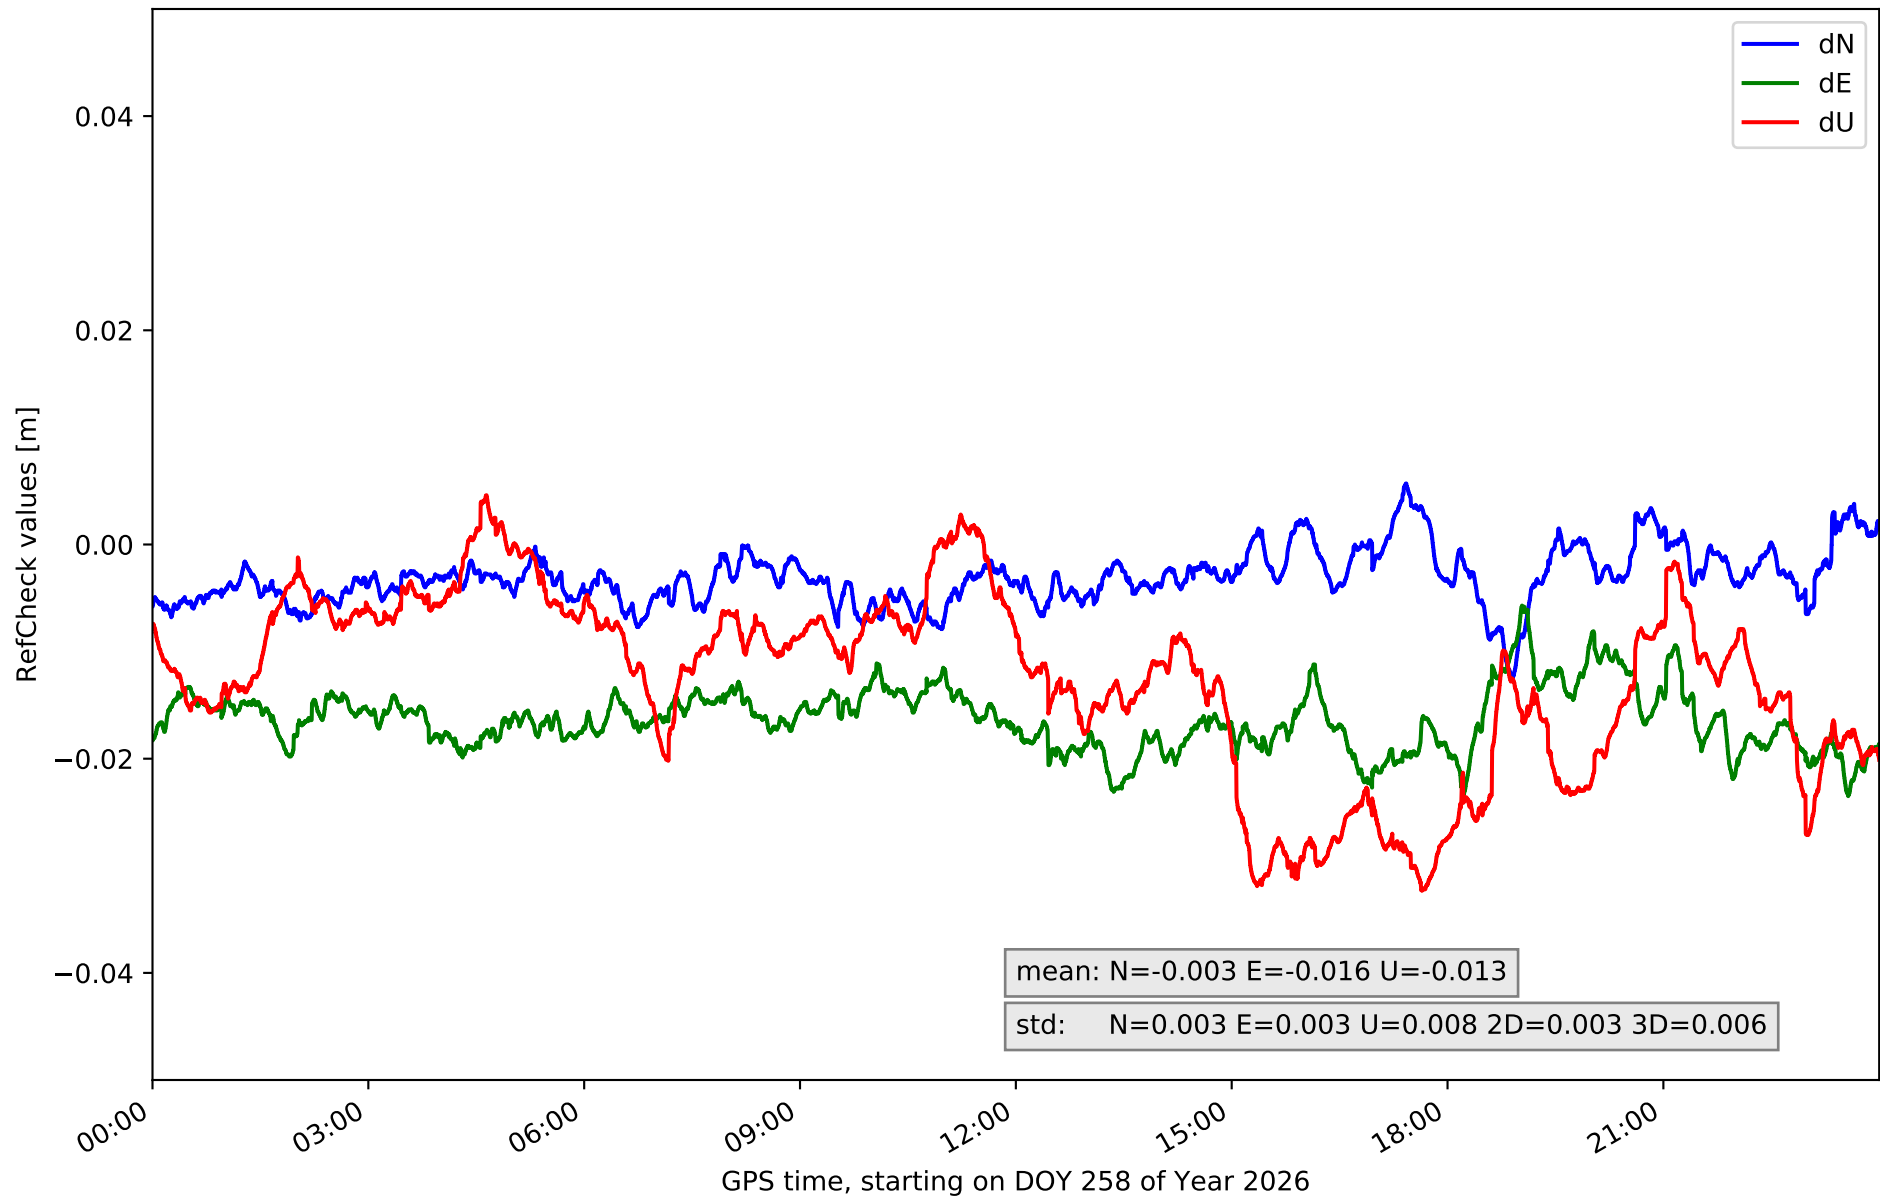


RefCheck for station TN02 in network NT32

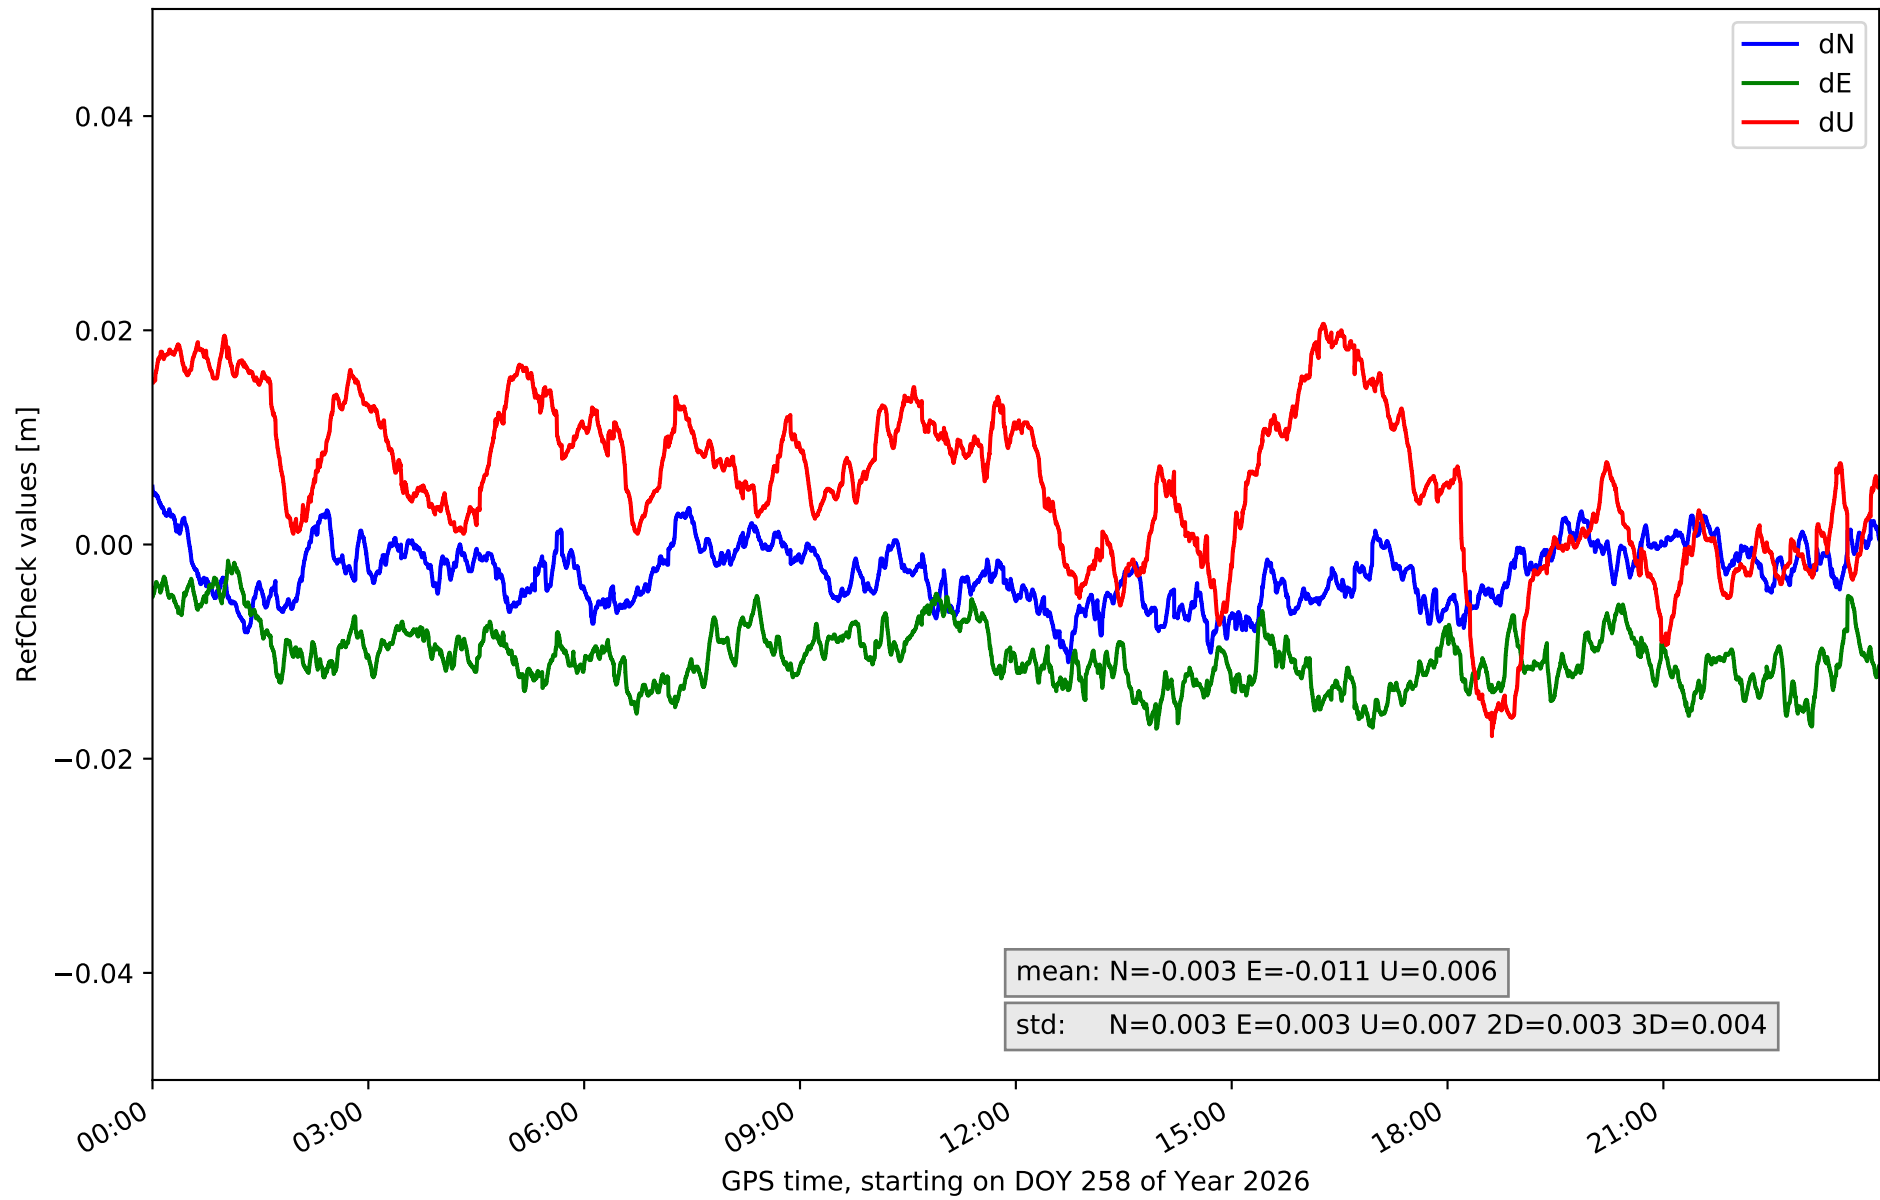


RefCheck for station TN03 in network NT32

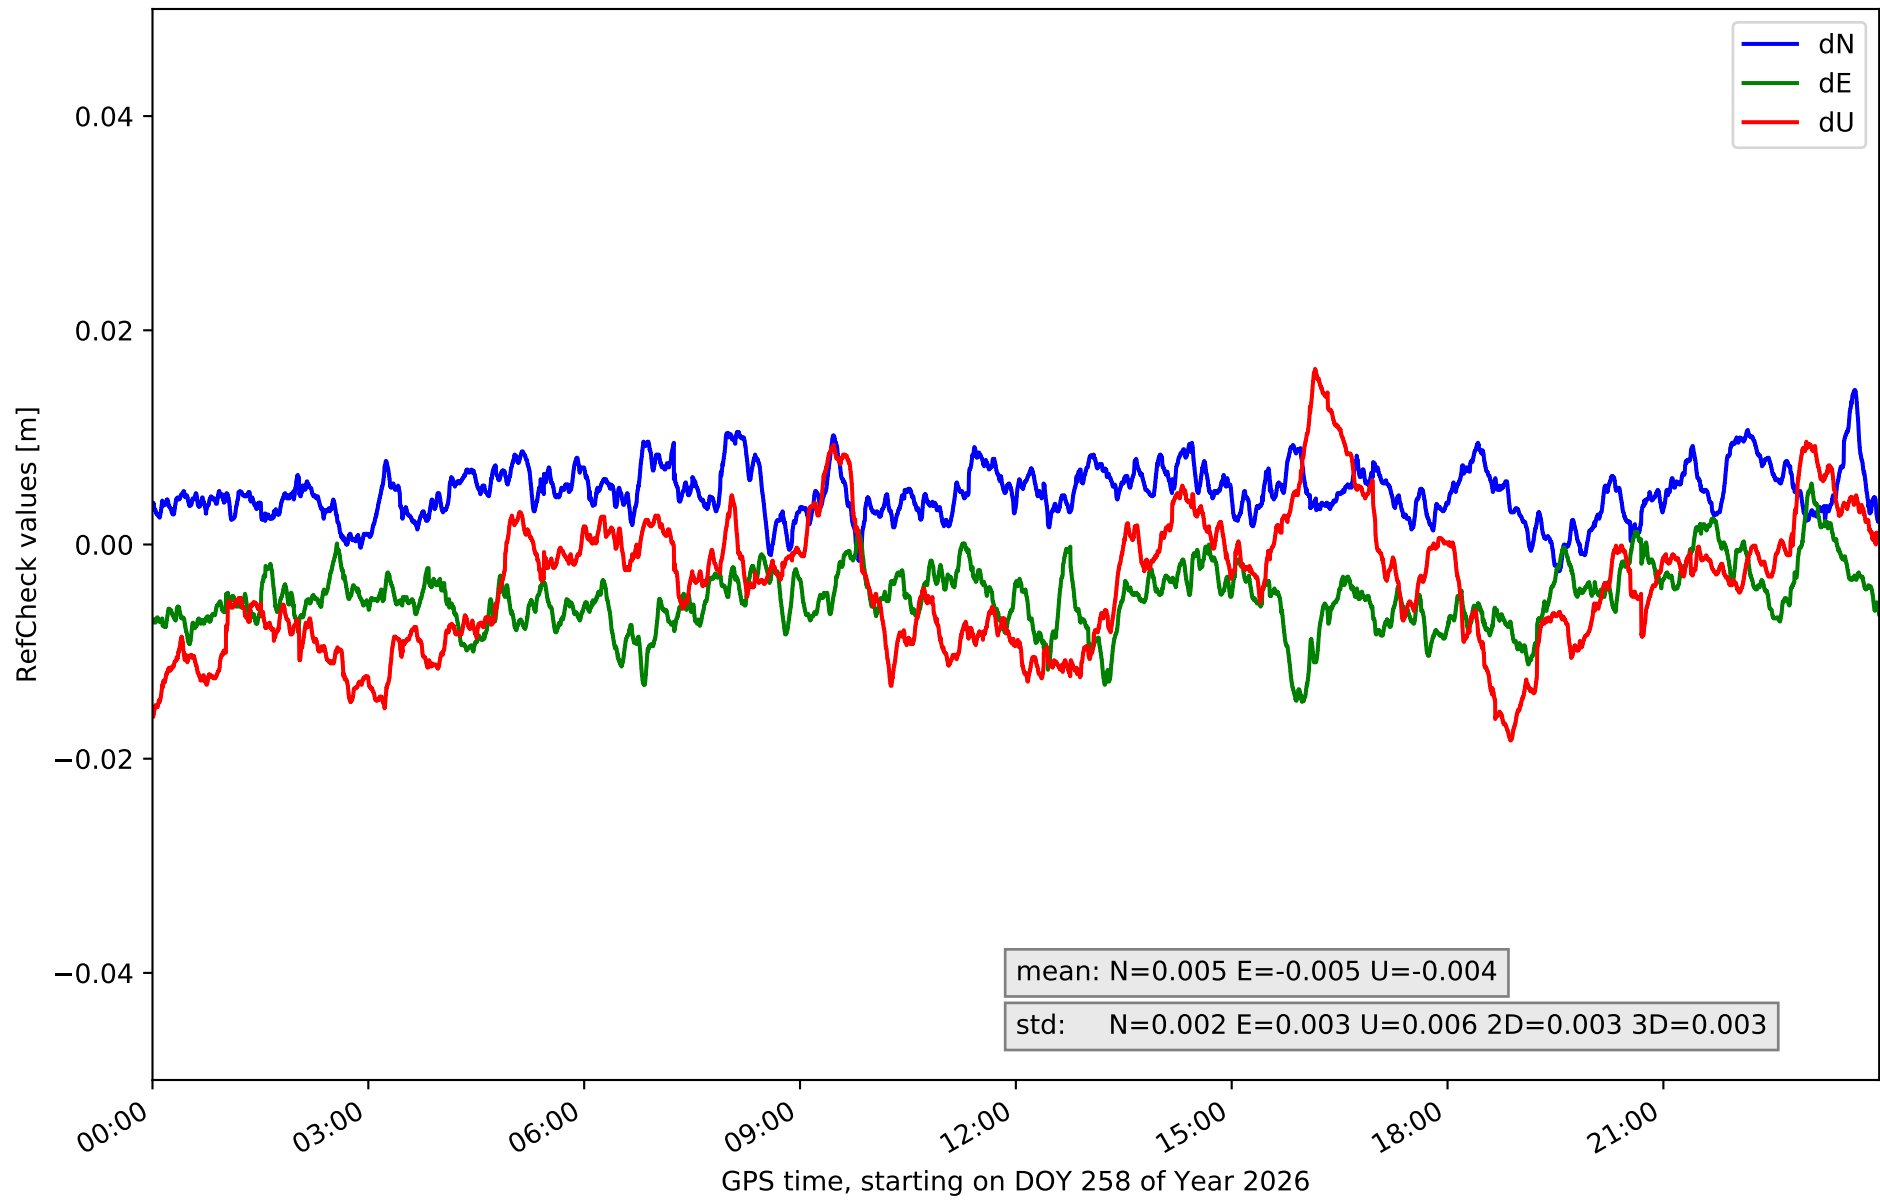

RefCheck for station TN06 in network NT32

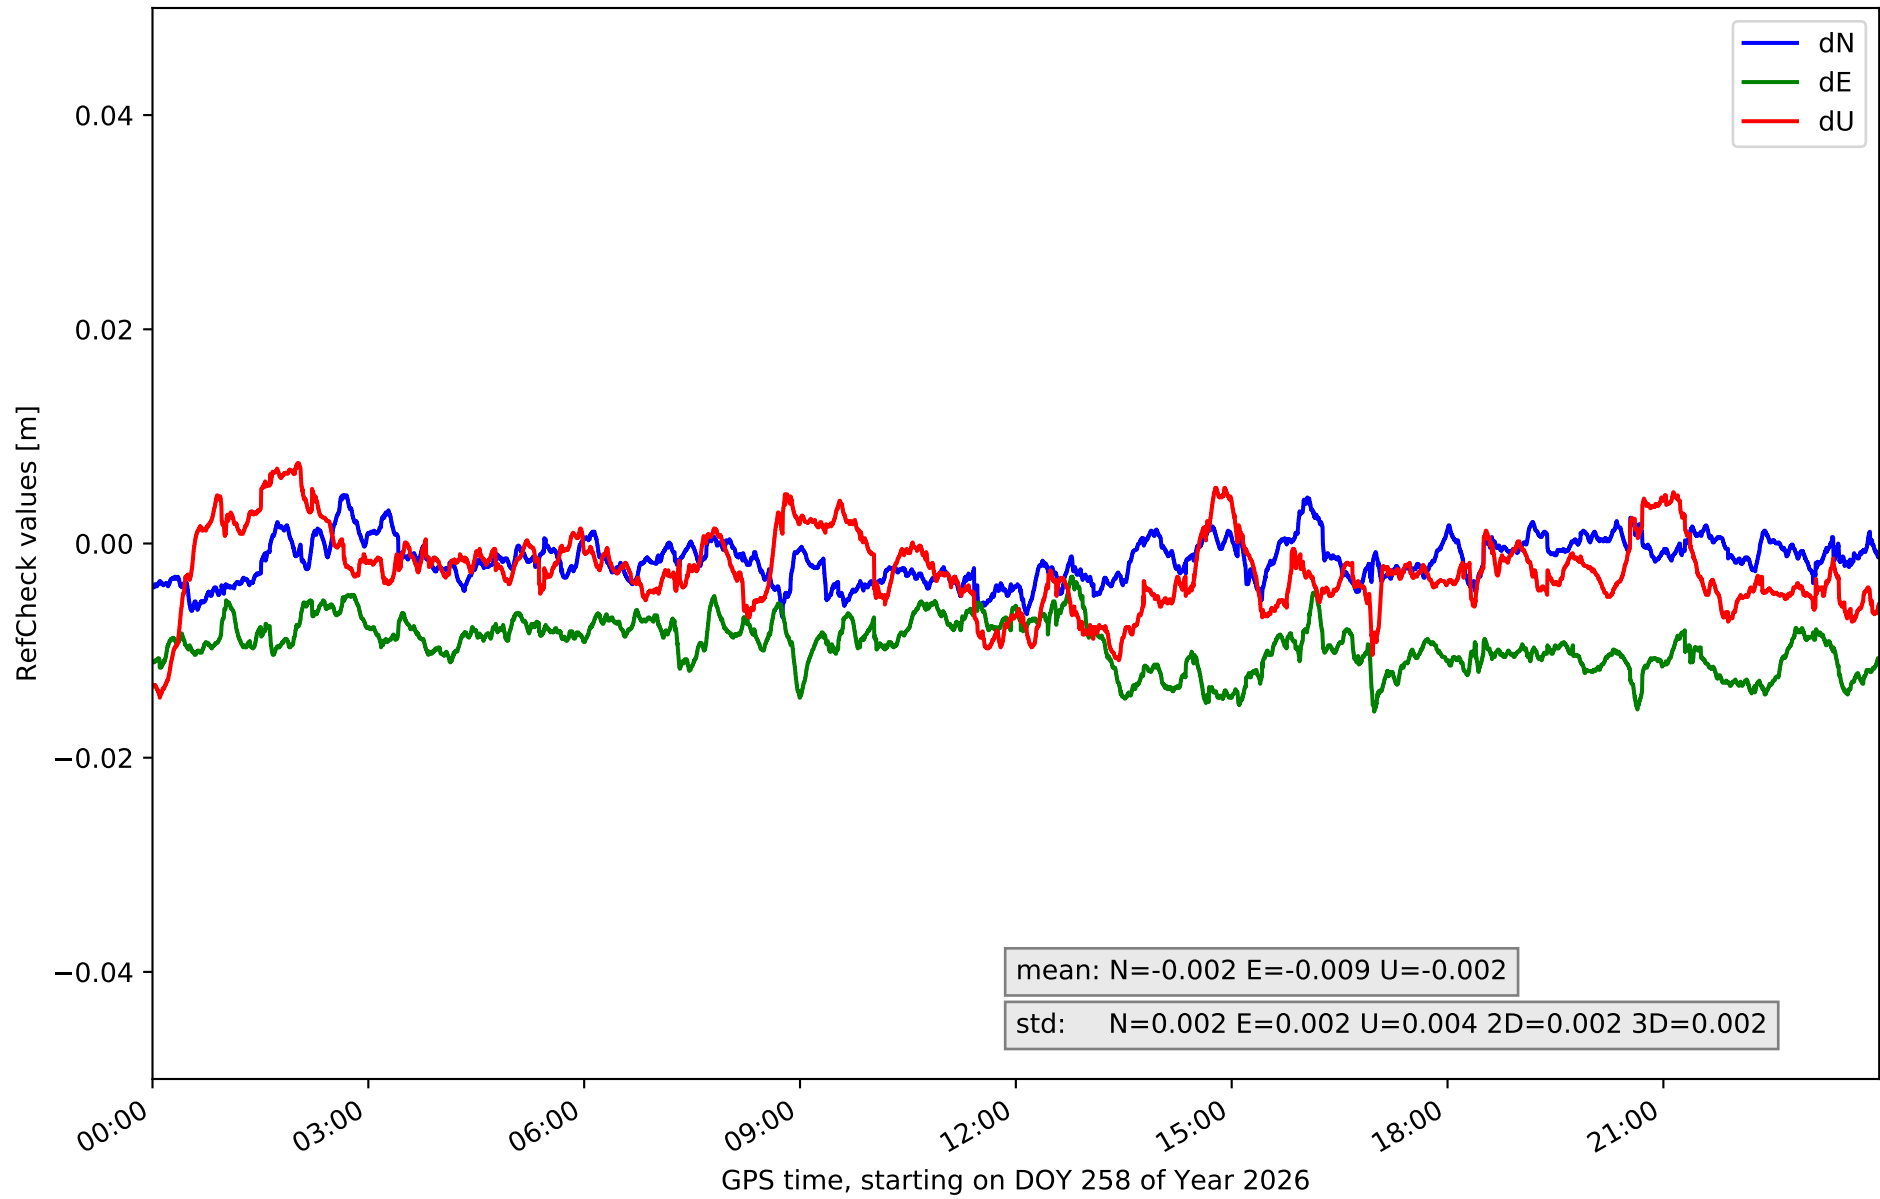

RefCheck for station TN09 in network NT32

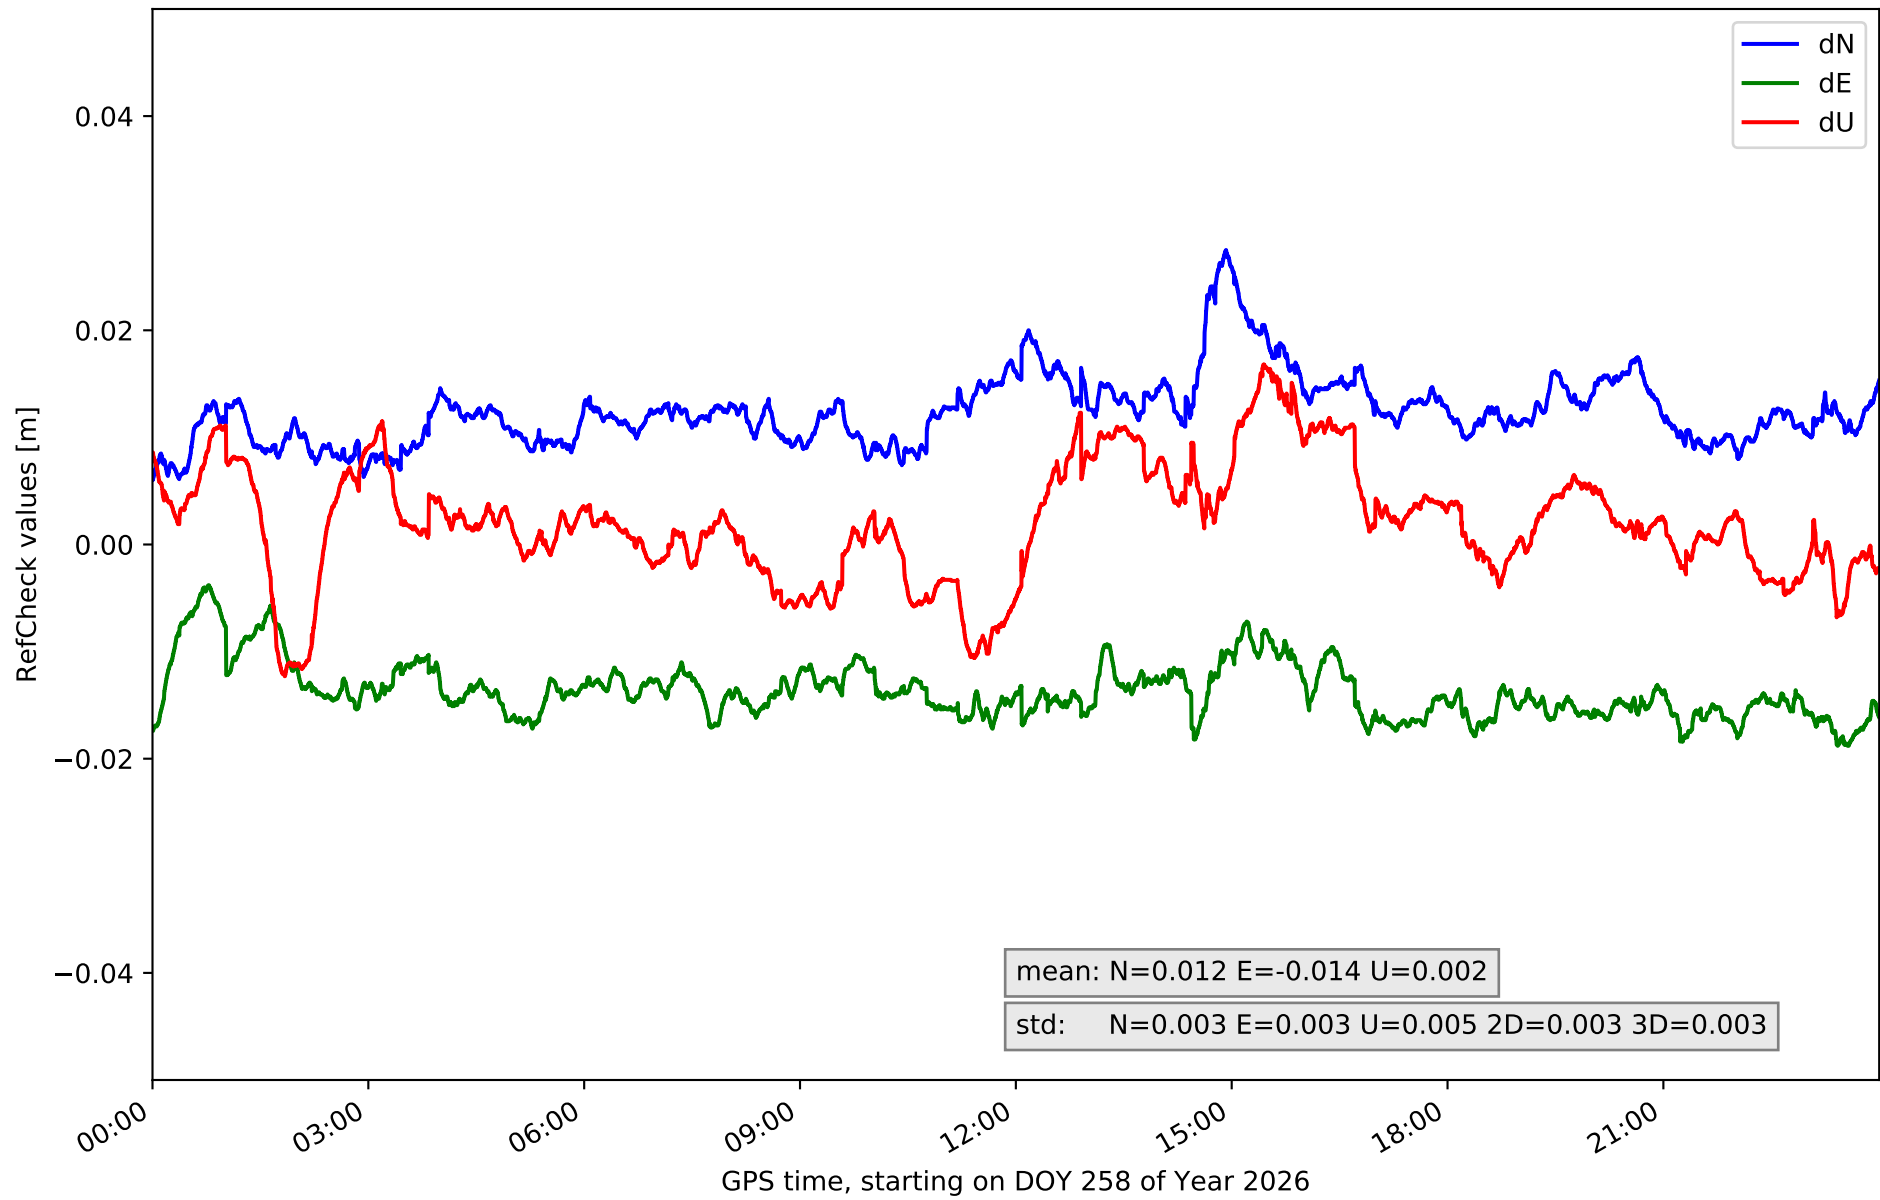

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.005	0.011	0.002	-0.0	0.03	0.003	-0.014	0.027	0.006	0.003	0.004	43289	99.4	18265	42.0
EH02	-0.001	0.02	0.004	0.0	0.028	0.003	-0.022	0.021	0.008	0.003	0.004	43466	99.9	34097	78.3
GOM1	-0.007	0.008	0.002	-0.019	0.007	0.003	-0.022	0.039	0.01	0.003	0.004	39517	90.8	9383	21.6
GOME	-0.005	0.006	0.002	-0.006	0.004	0.002	-0.002	0.017	0.004	0.001	0.003	0	0.0	0	0.0
IZAN	-0.009	0.005	0.002	-0.02	-0.0	0.002	-0.019	0.004	0.004	0.002	0.003	41960	96.4	3366	7.7
LP01	-0.02	-0.009	0.002	0.001	0.017	0.002	0.001	0.029	0.005	0.002	0.004	43427	99.8	25744	59.1
LP03	-0.01	0.002	0.002	-0.005	0.013	0.004	-0.023	0.018	0.007	0.002	0.004	4465	10.3	845	1.9
LPAL	-0.019	-0.002	0.003	0.004	0.019	0.003	-0.036	0.008	0.008	0.003	0.005	43529	100.0	18940	43.5
LRES	0.0	0.016	0.002	0.0	0.029	0.004	-0.023	0.01	0.005	0.003	0.003	43464	99.9	33581	77.1
TN01	-0.012	0.006	0.003	-0.024	-0.006	0.003	-0.032	0.005	0.008	0.003	0.006	43029	98.9	22827	52.4
TN02	-0.011	0.005	0.003	-0.017	-0.002	0.003	-0.018	0.021	0.007	0.003	0.004	28859	66.3	2917	6.7
TN03	-0.003	0.014	0.002	-0.015	0.006	0.003	-0.018	0.016	0.006	0.003	0.003	6875	15.8	41	0.1
TN06	-0.007	0.004	0.002	-0.016	-0.003	0.002	-0.014	0.007	0.004	0.002	0.002	19264	44.3	0	0.0
TN09	0.006	0.028	0.003	-0.019	-0.004	0.003	-0.012	0.017	0.005	0.003	0.003	43372	99.6	17990	41.3
Mean	-0.007	0.008	0.002	-0.01	0.01	0.003	-0.018	0.017	0.006	0.003	0.004	31751.1	73.0	13428.3	30.8
Min/Max	-0.02	0.028	0.004	-0.024	0.03	0.004	-0.036	0.039	0.01	0.003	0.006	43529	100.0	34097	78.3

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	94.0	94.6	94.3	93.5	94.0
considering satellites with dual-frequency fixed	92.6	92.6	92.0	92.1	93.7
considering all signals separately	92.6	92.5	92.0	92.4	93.6