

summary for network NT32

timeperiod chosen: from 2026-09-17-00:00:00 until 2026-09-17-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.1 seconds


average fixing percentage with threshold set to 0.3: 90.1 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

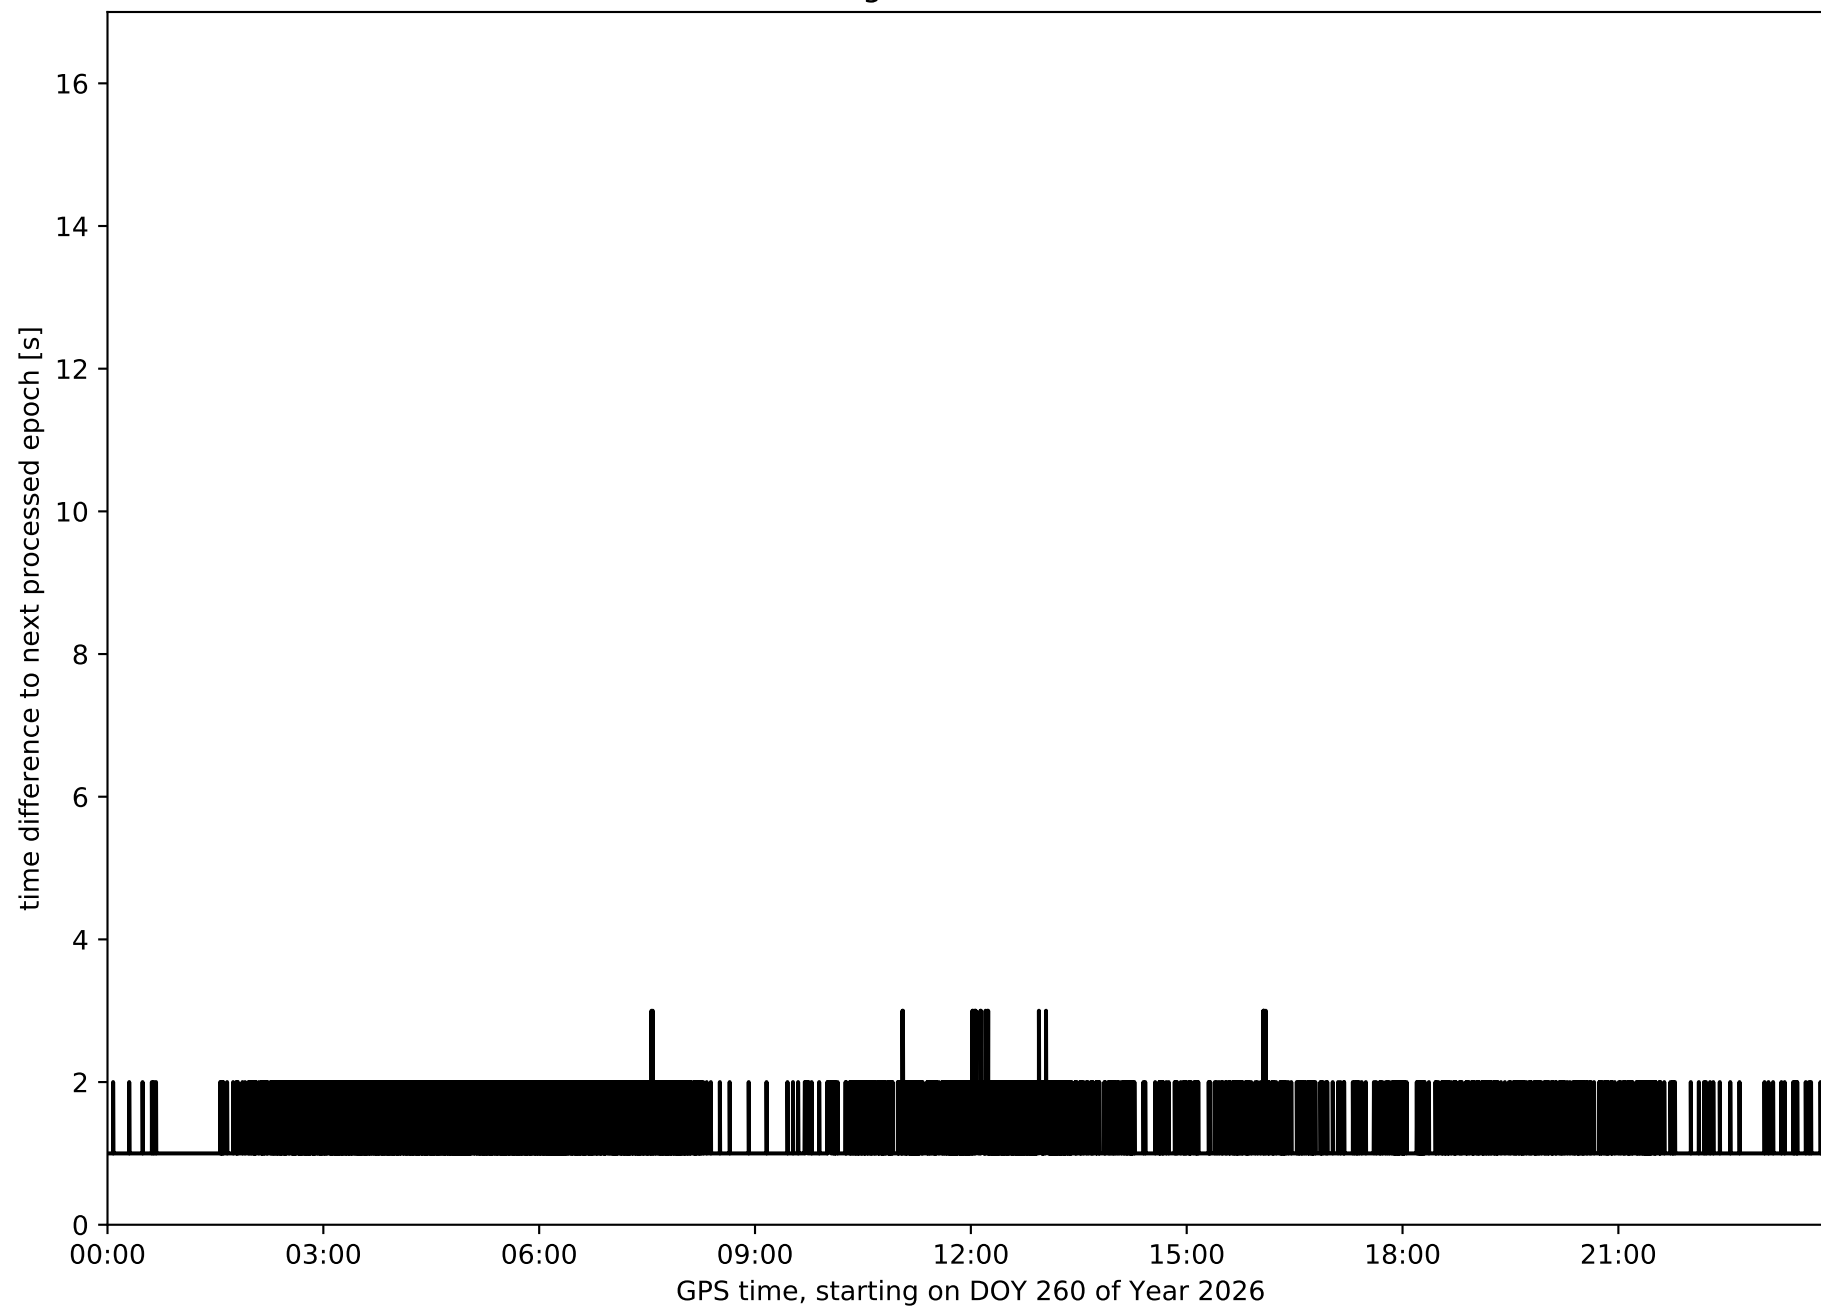


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

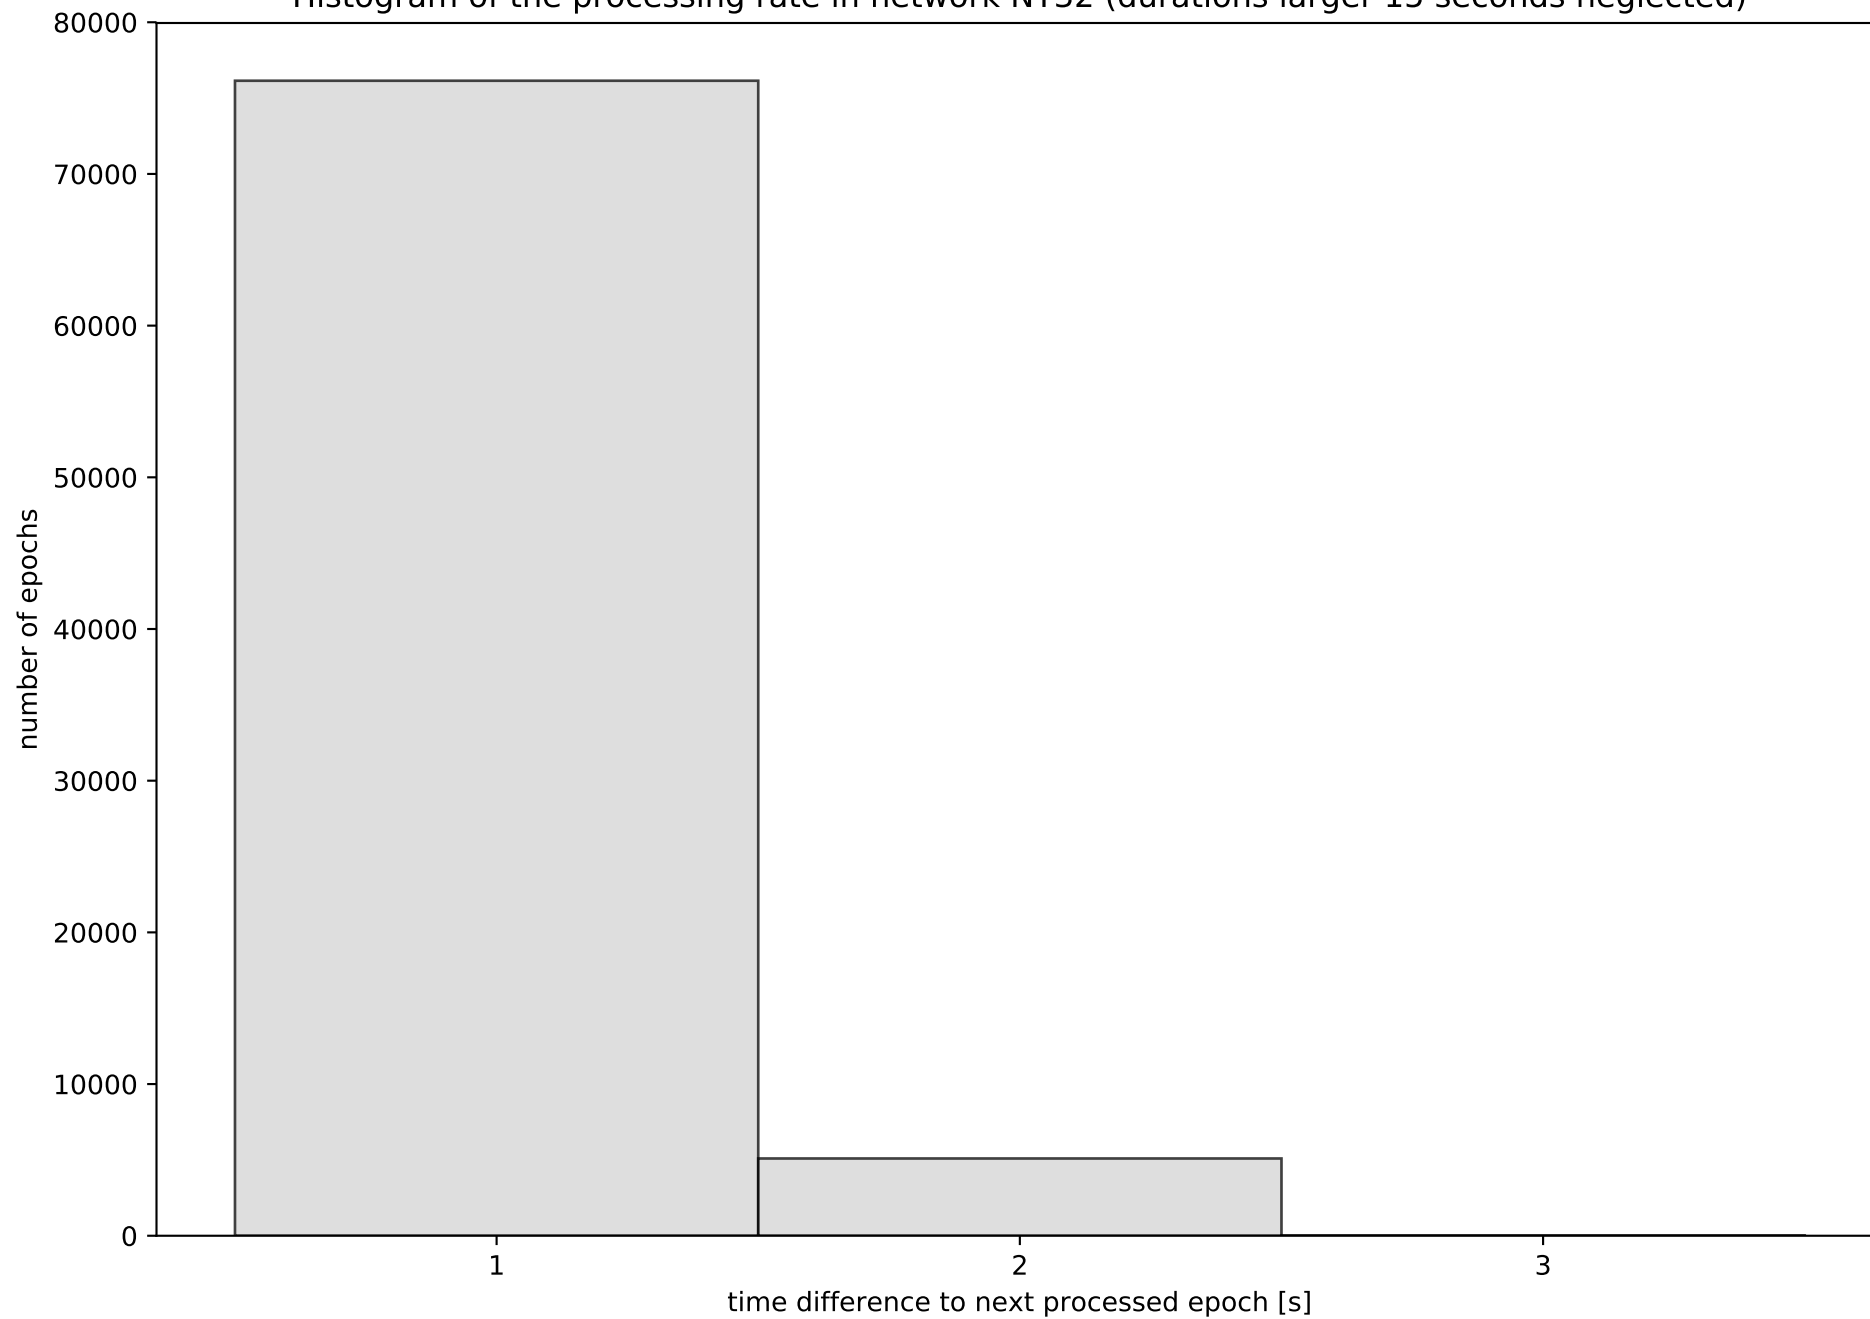


Network NT32 with threshold set to 0.3

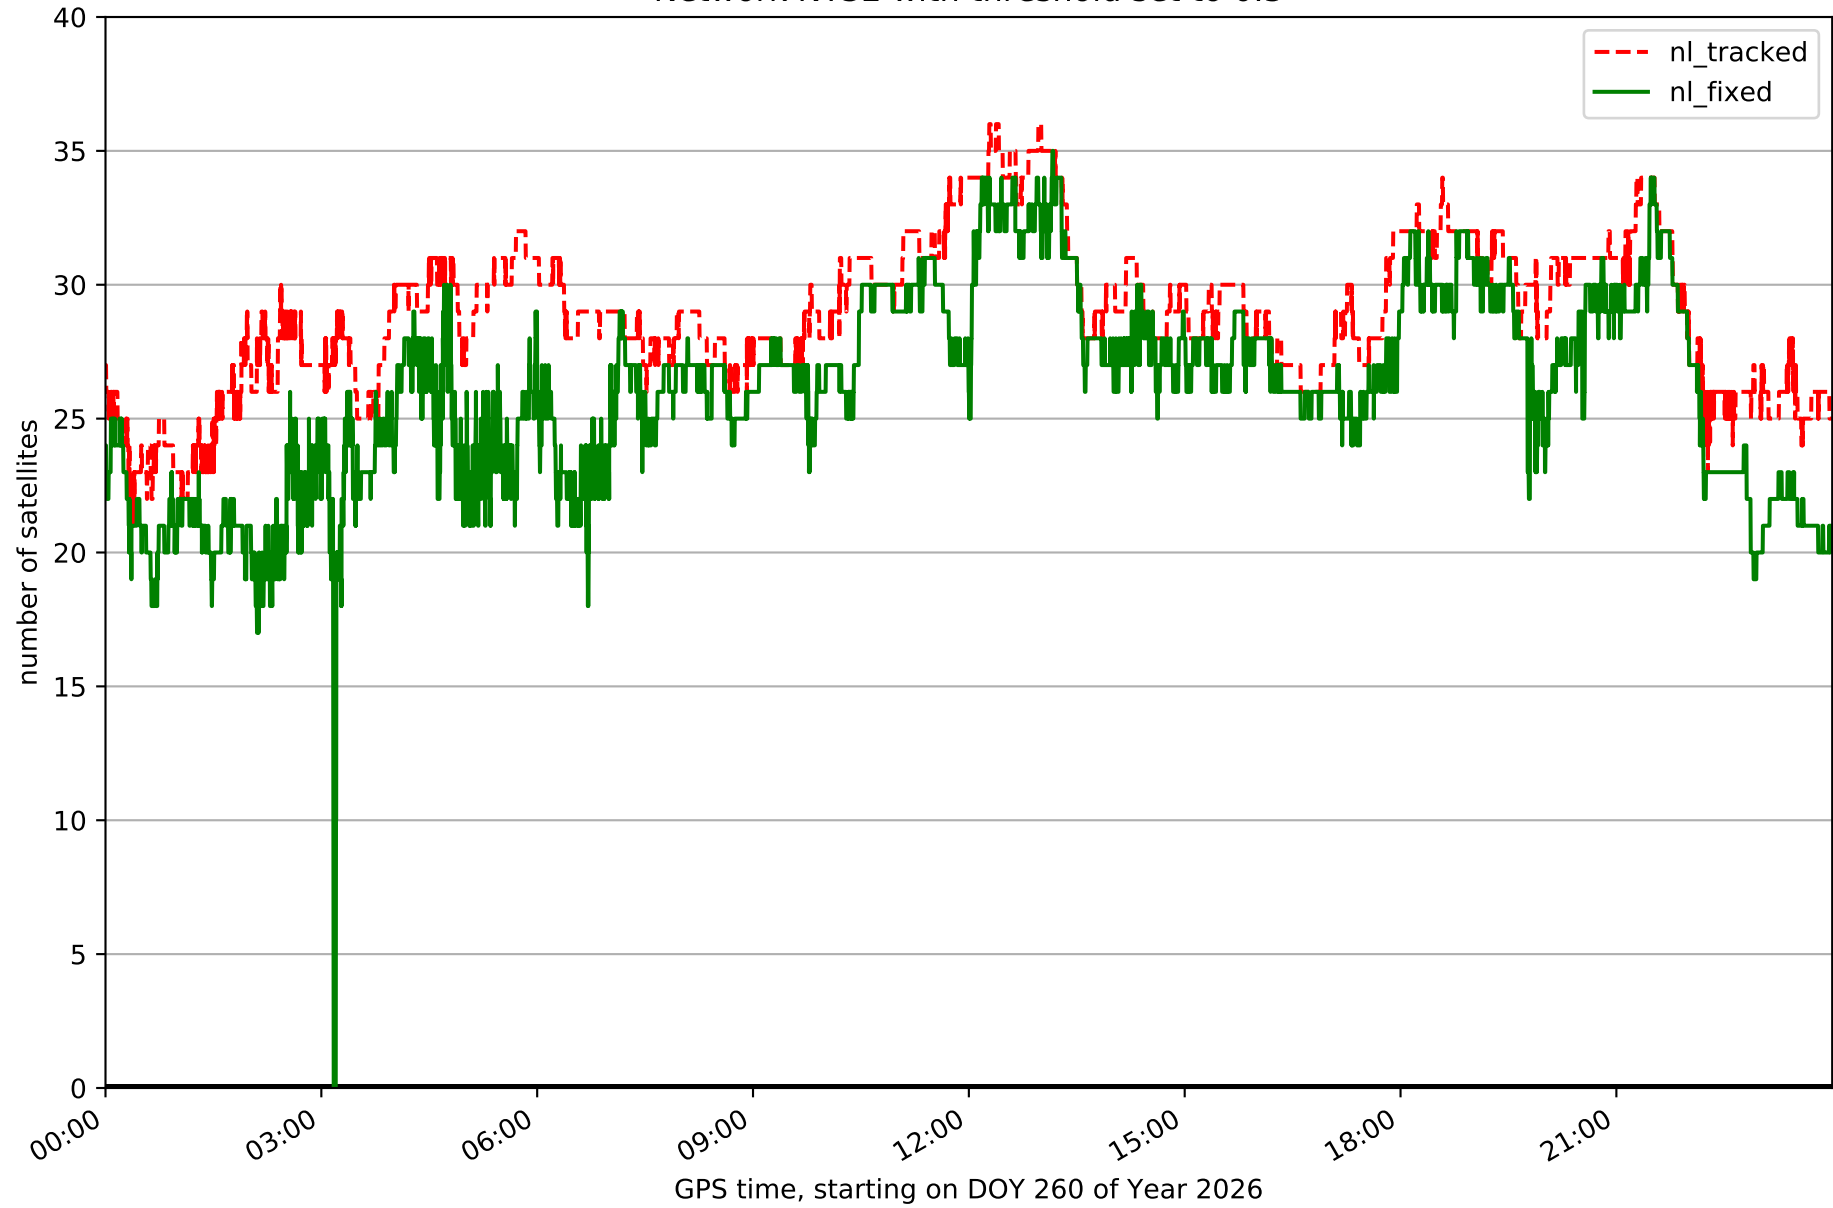


Fixing percentage of satellites in network NT32 with threshold set to 0.3

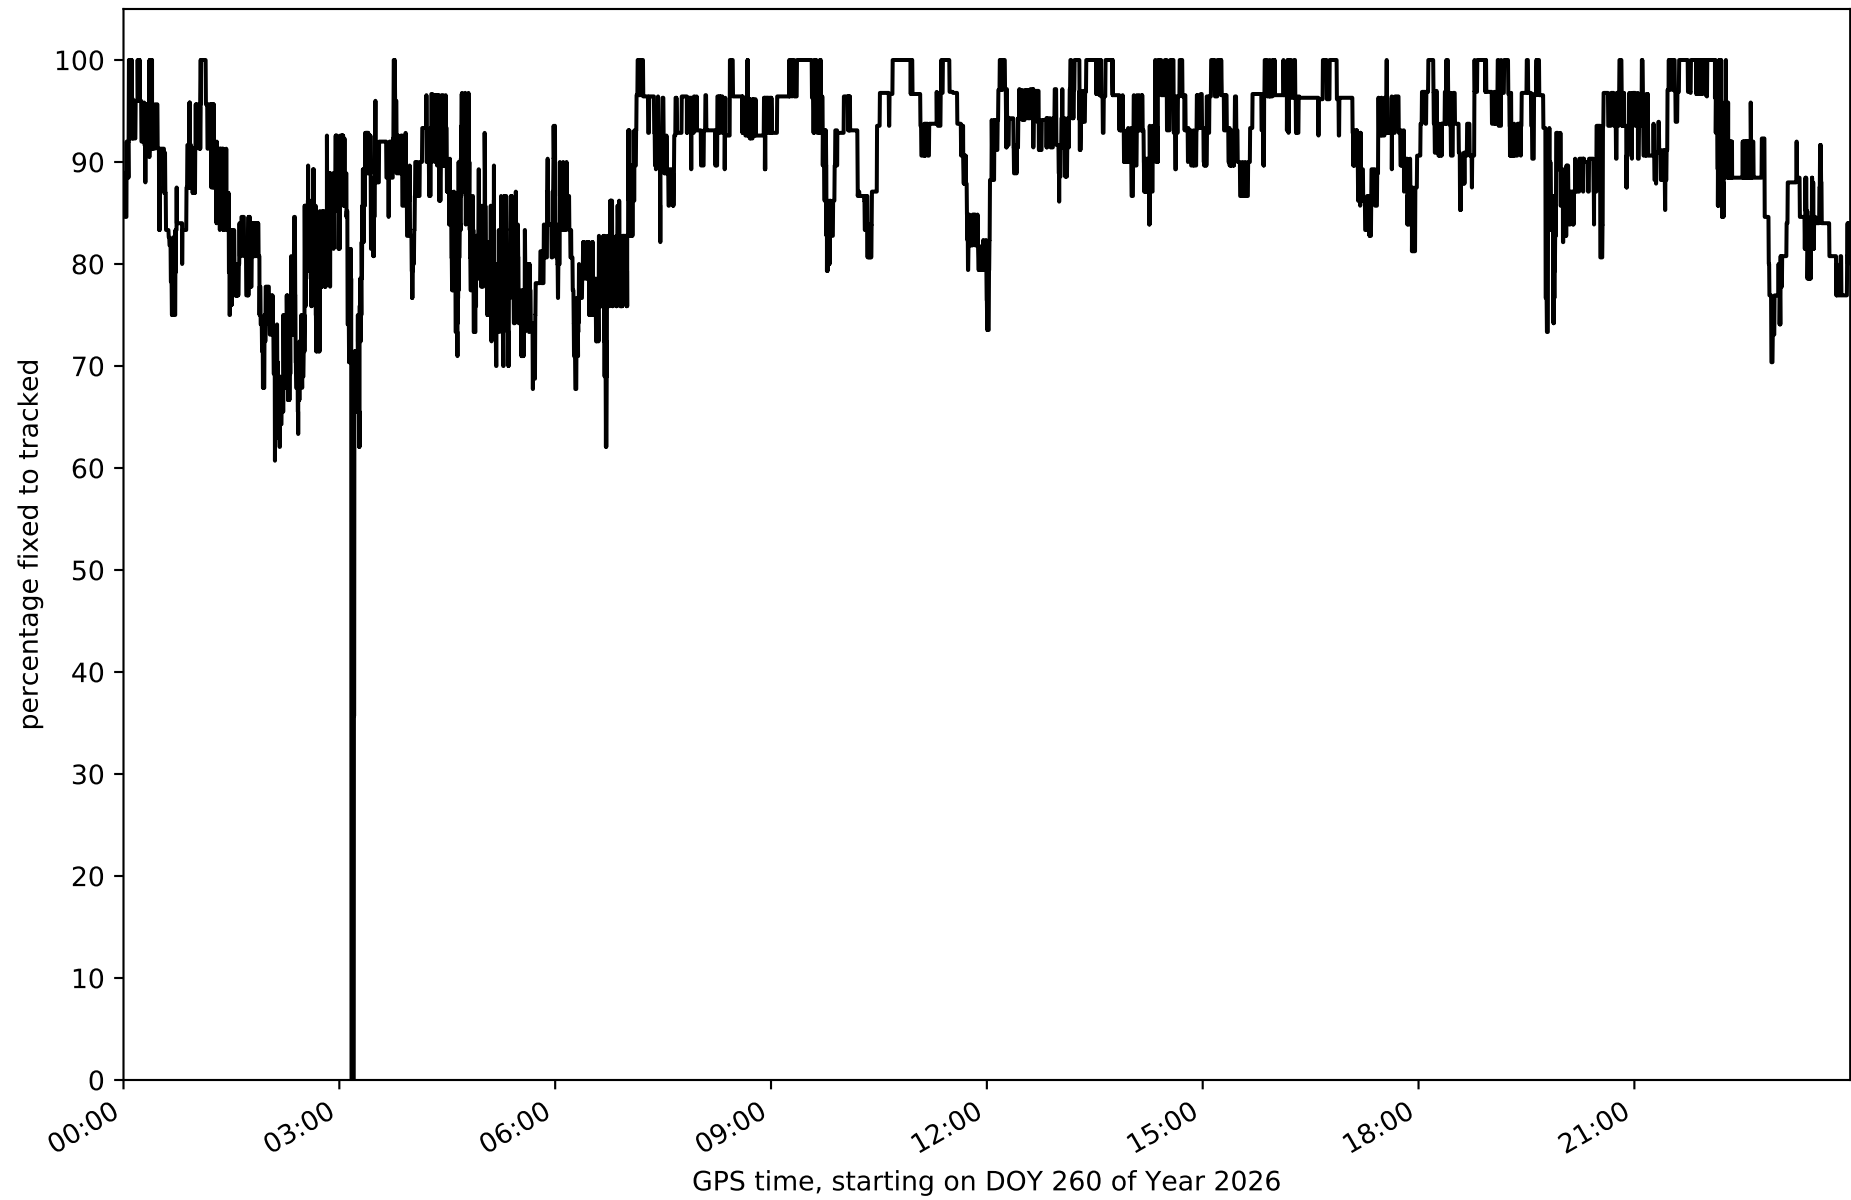


Network NT32 - only GPS with threshold set to 0.3

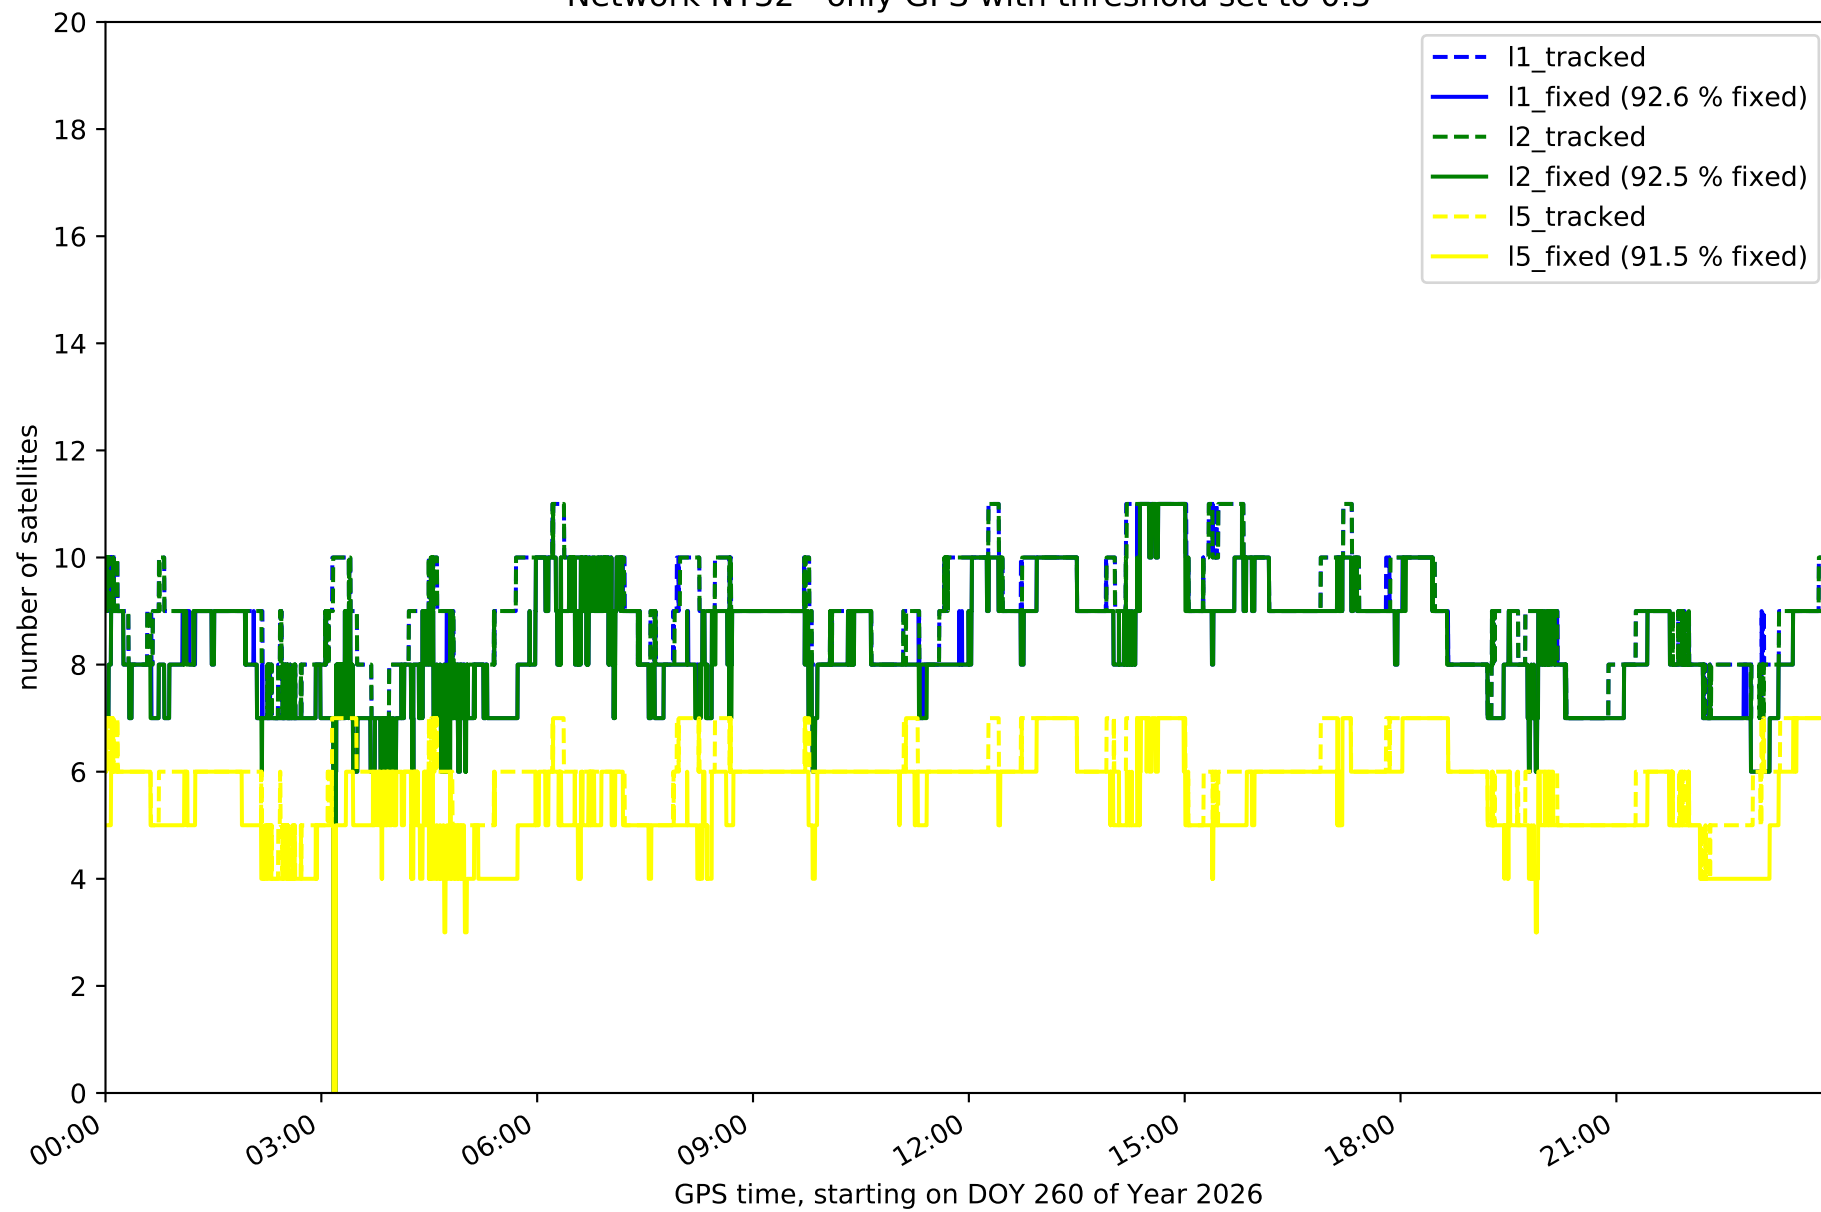


Network NT32 - only GLONASS with threshold set to 0.3

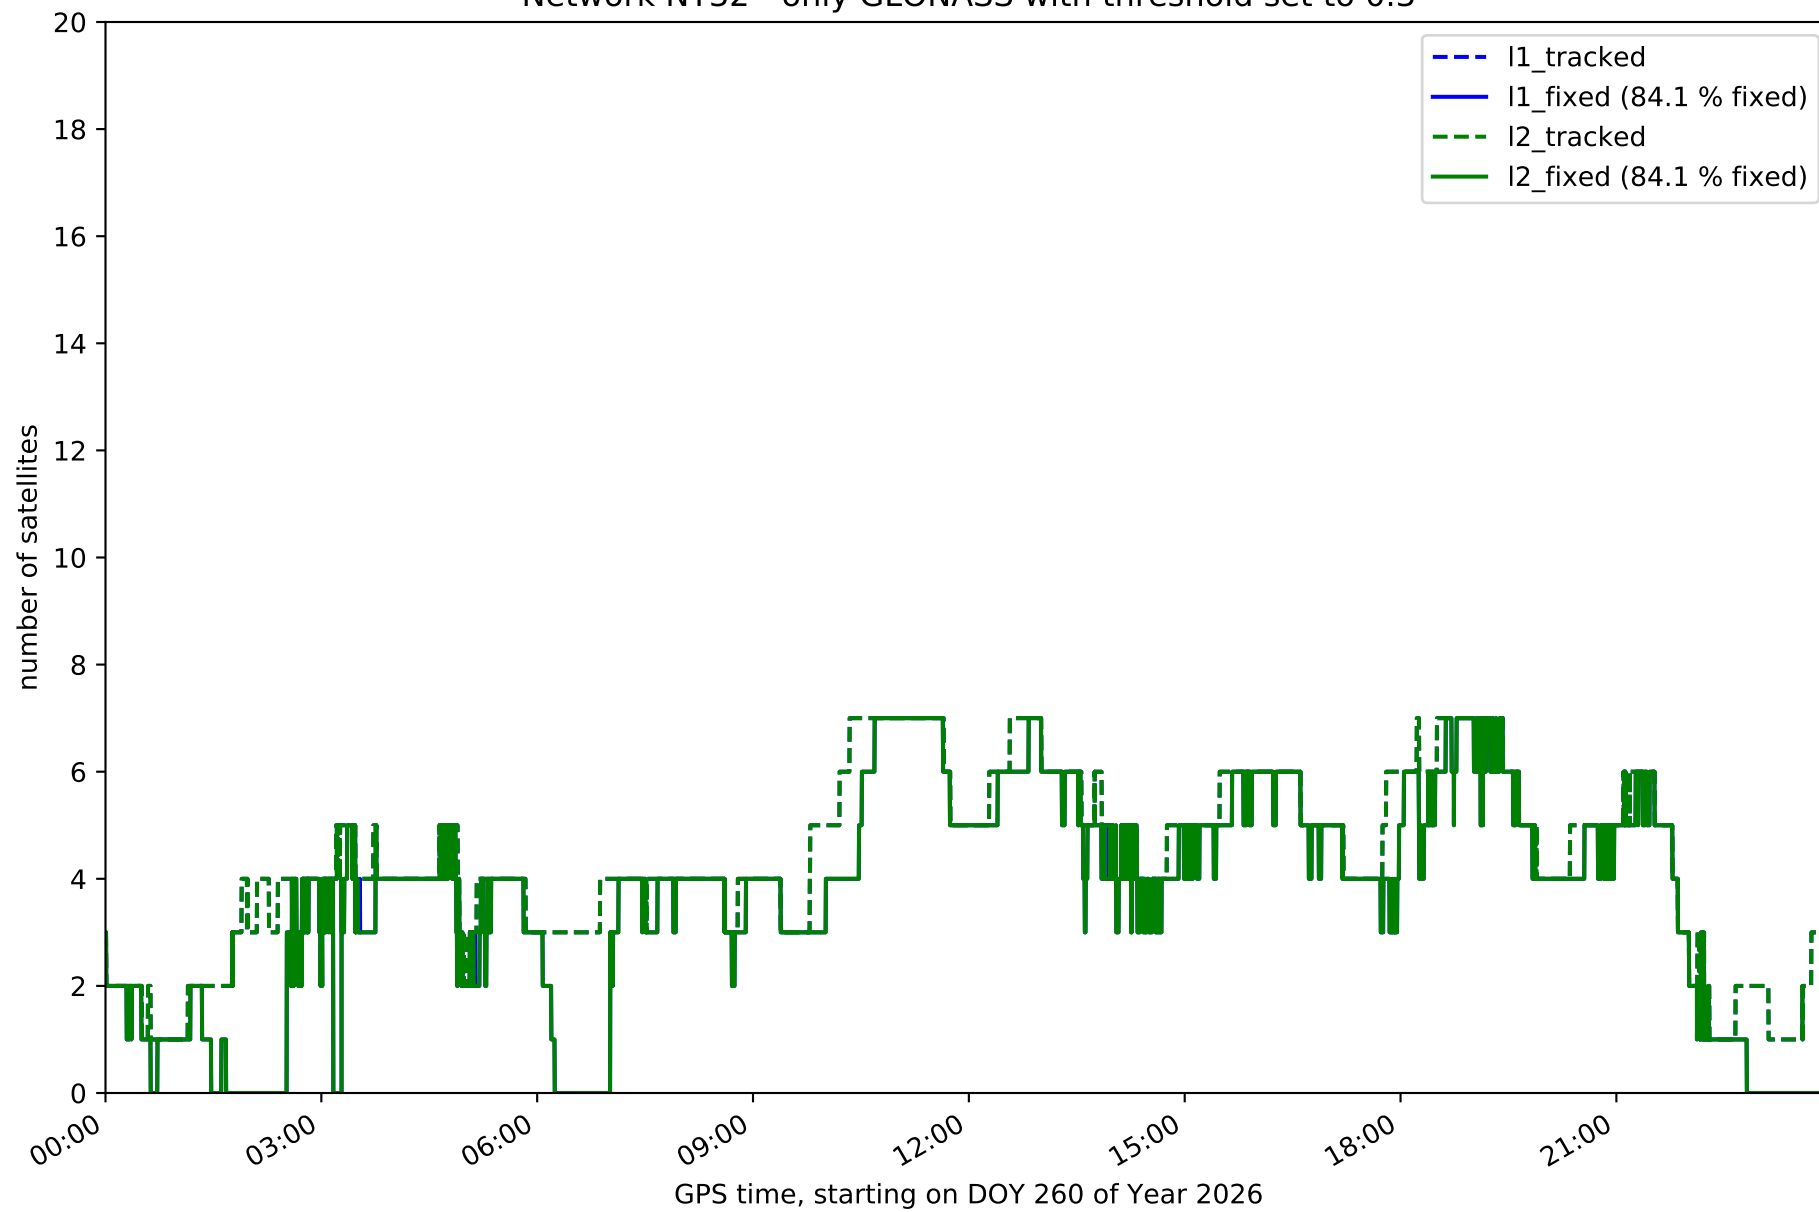


Network NT32 - only BDS with threshold set to 0.3

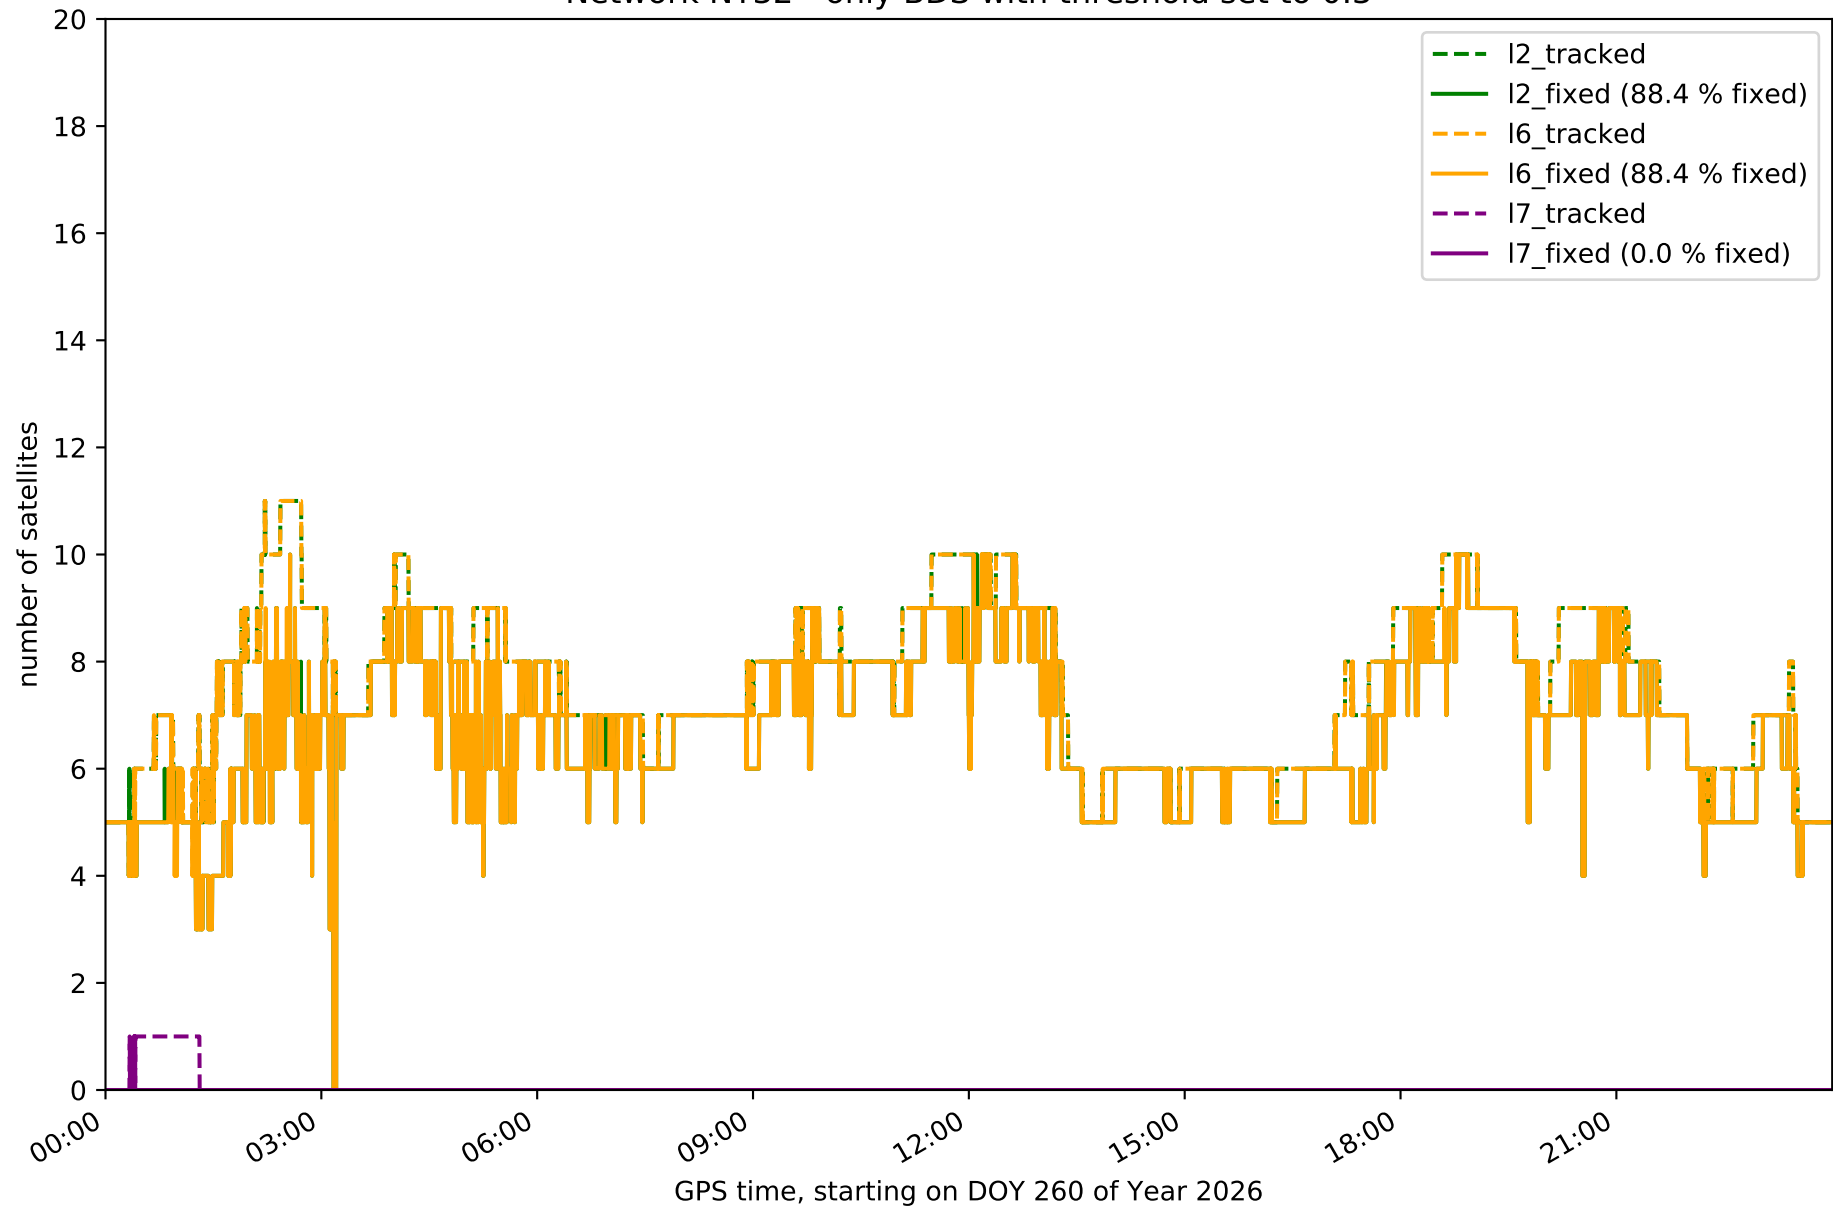


Network NT32 - only Galileo with threshold set to 0.3

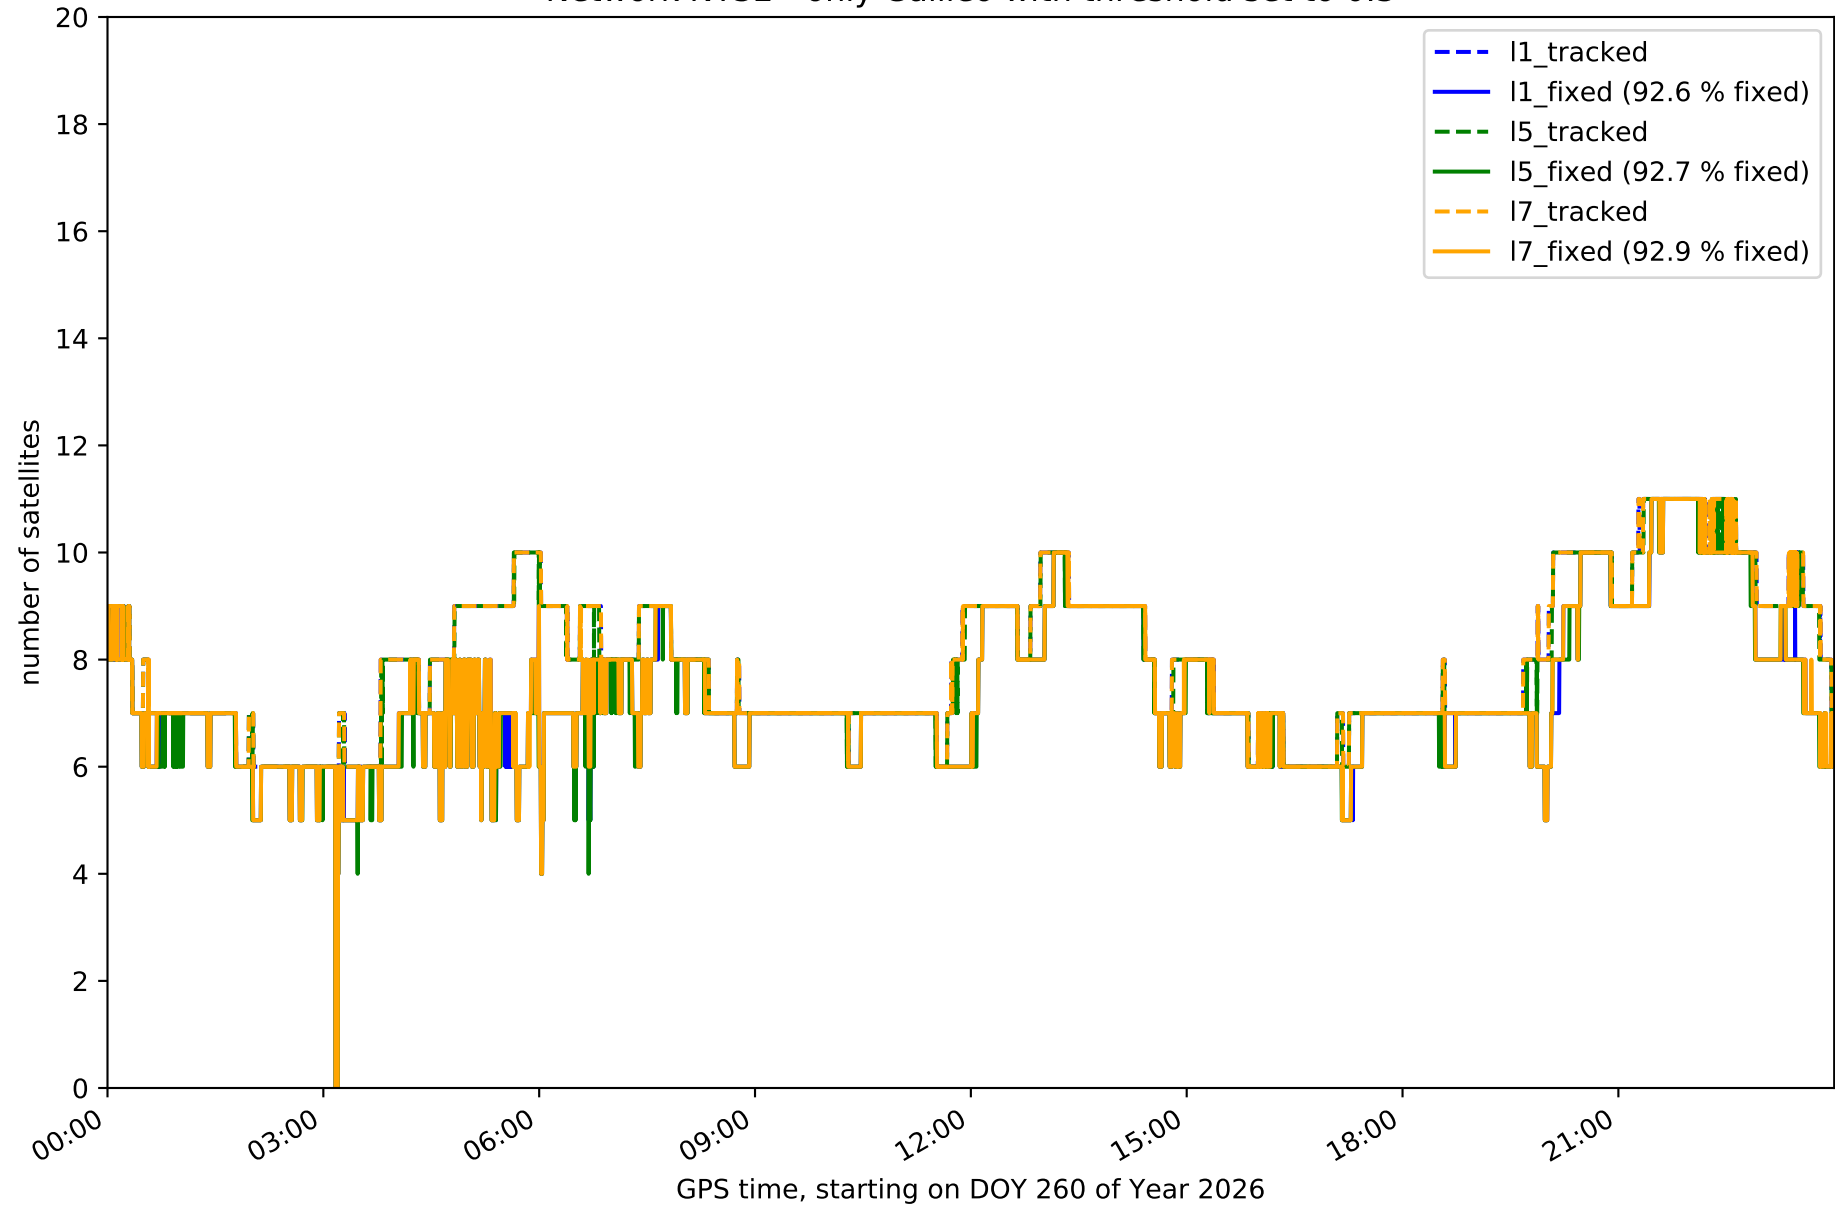


Station EH01 in network NT32

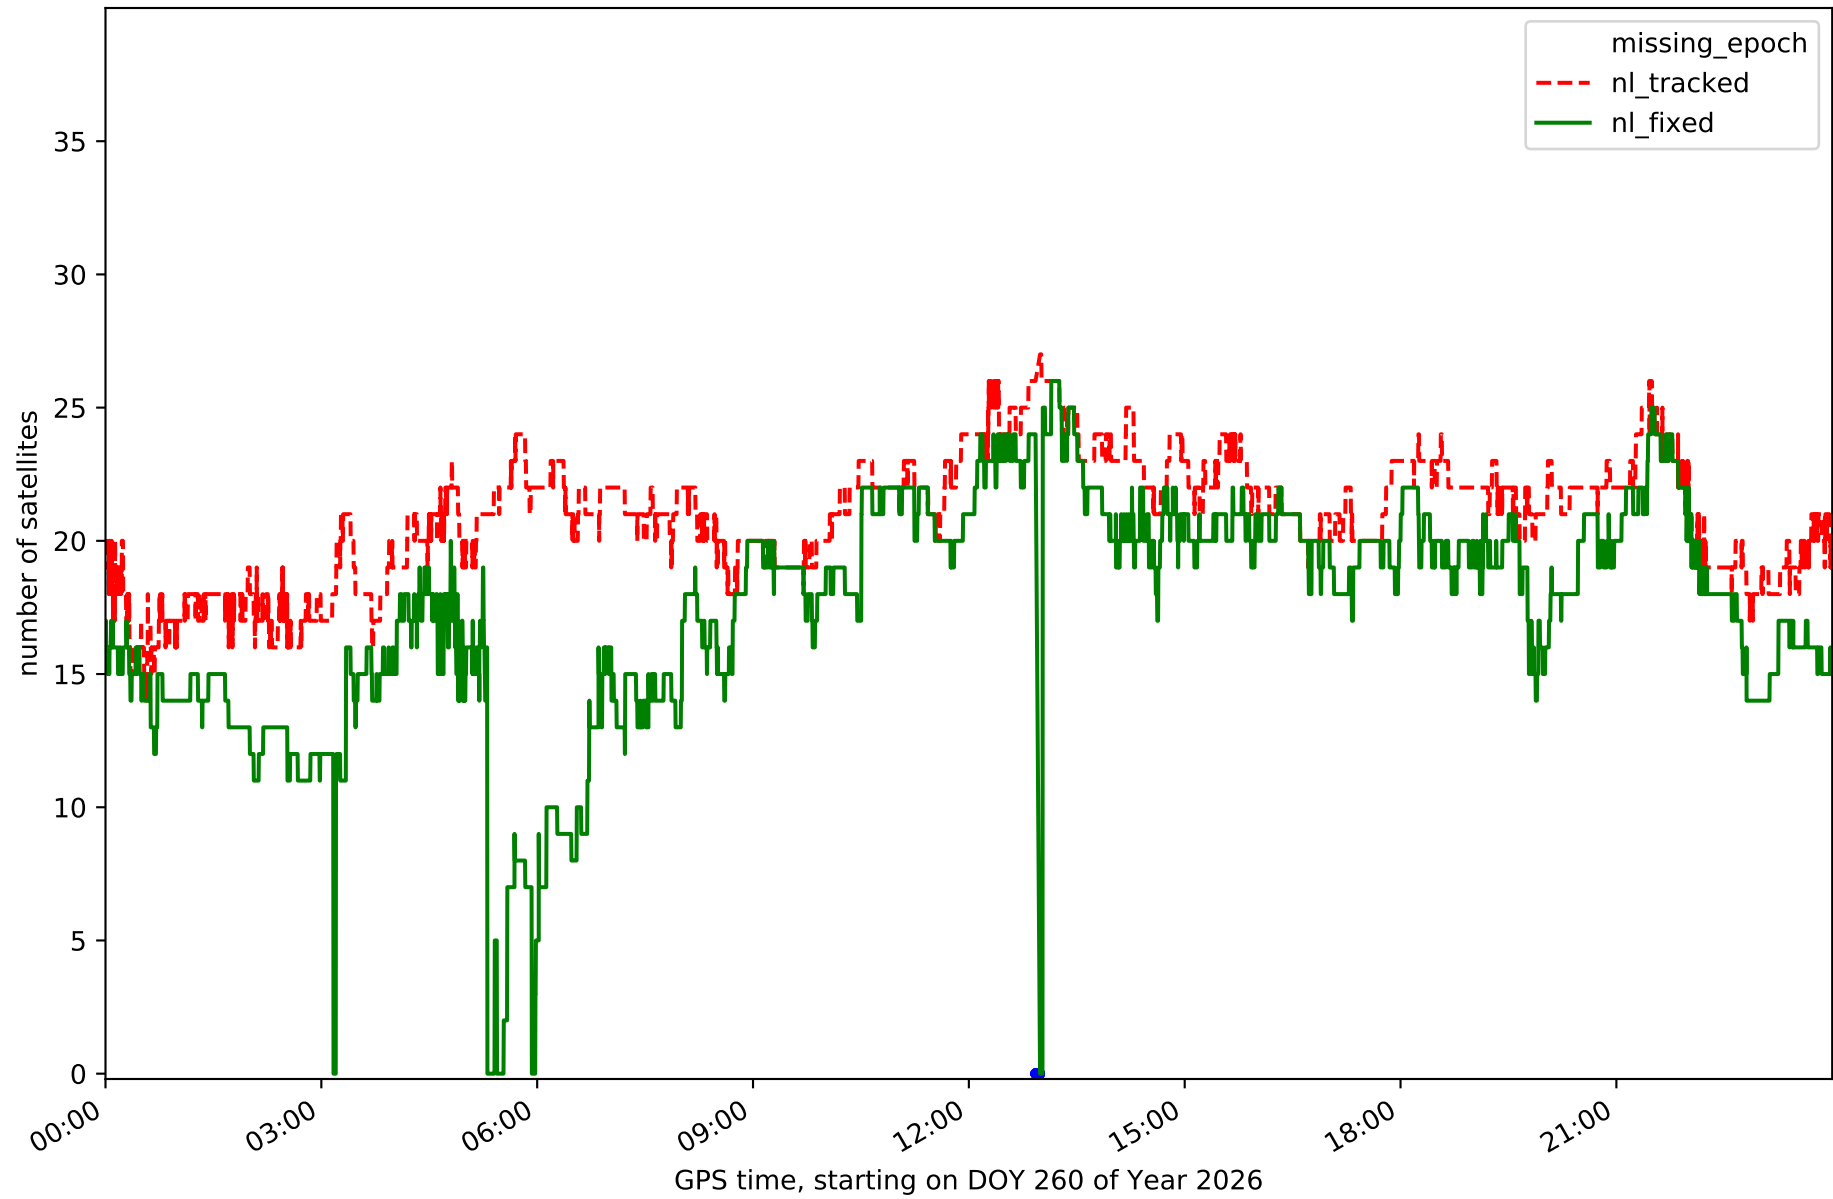


Station EH02 in network NT32

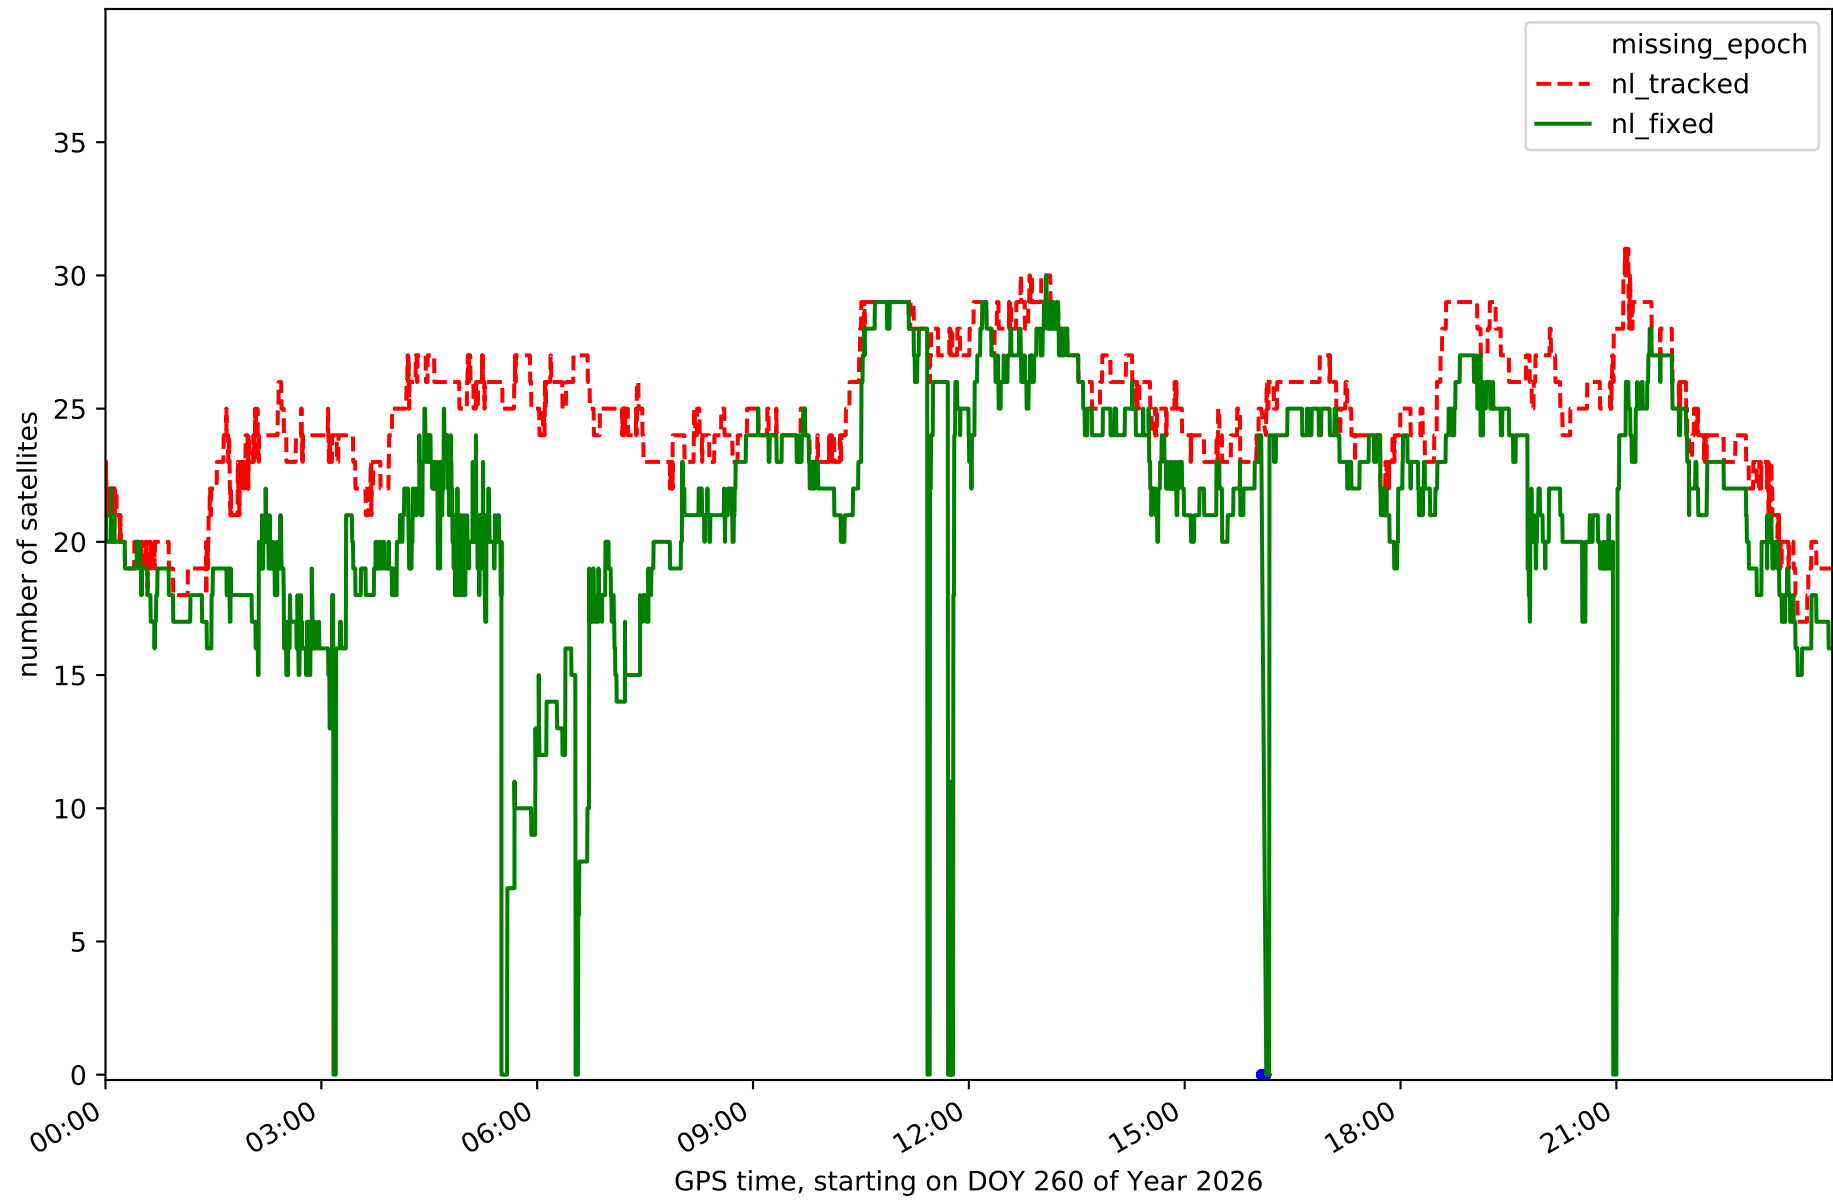


Station GOM1 in network NT32

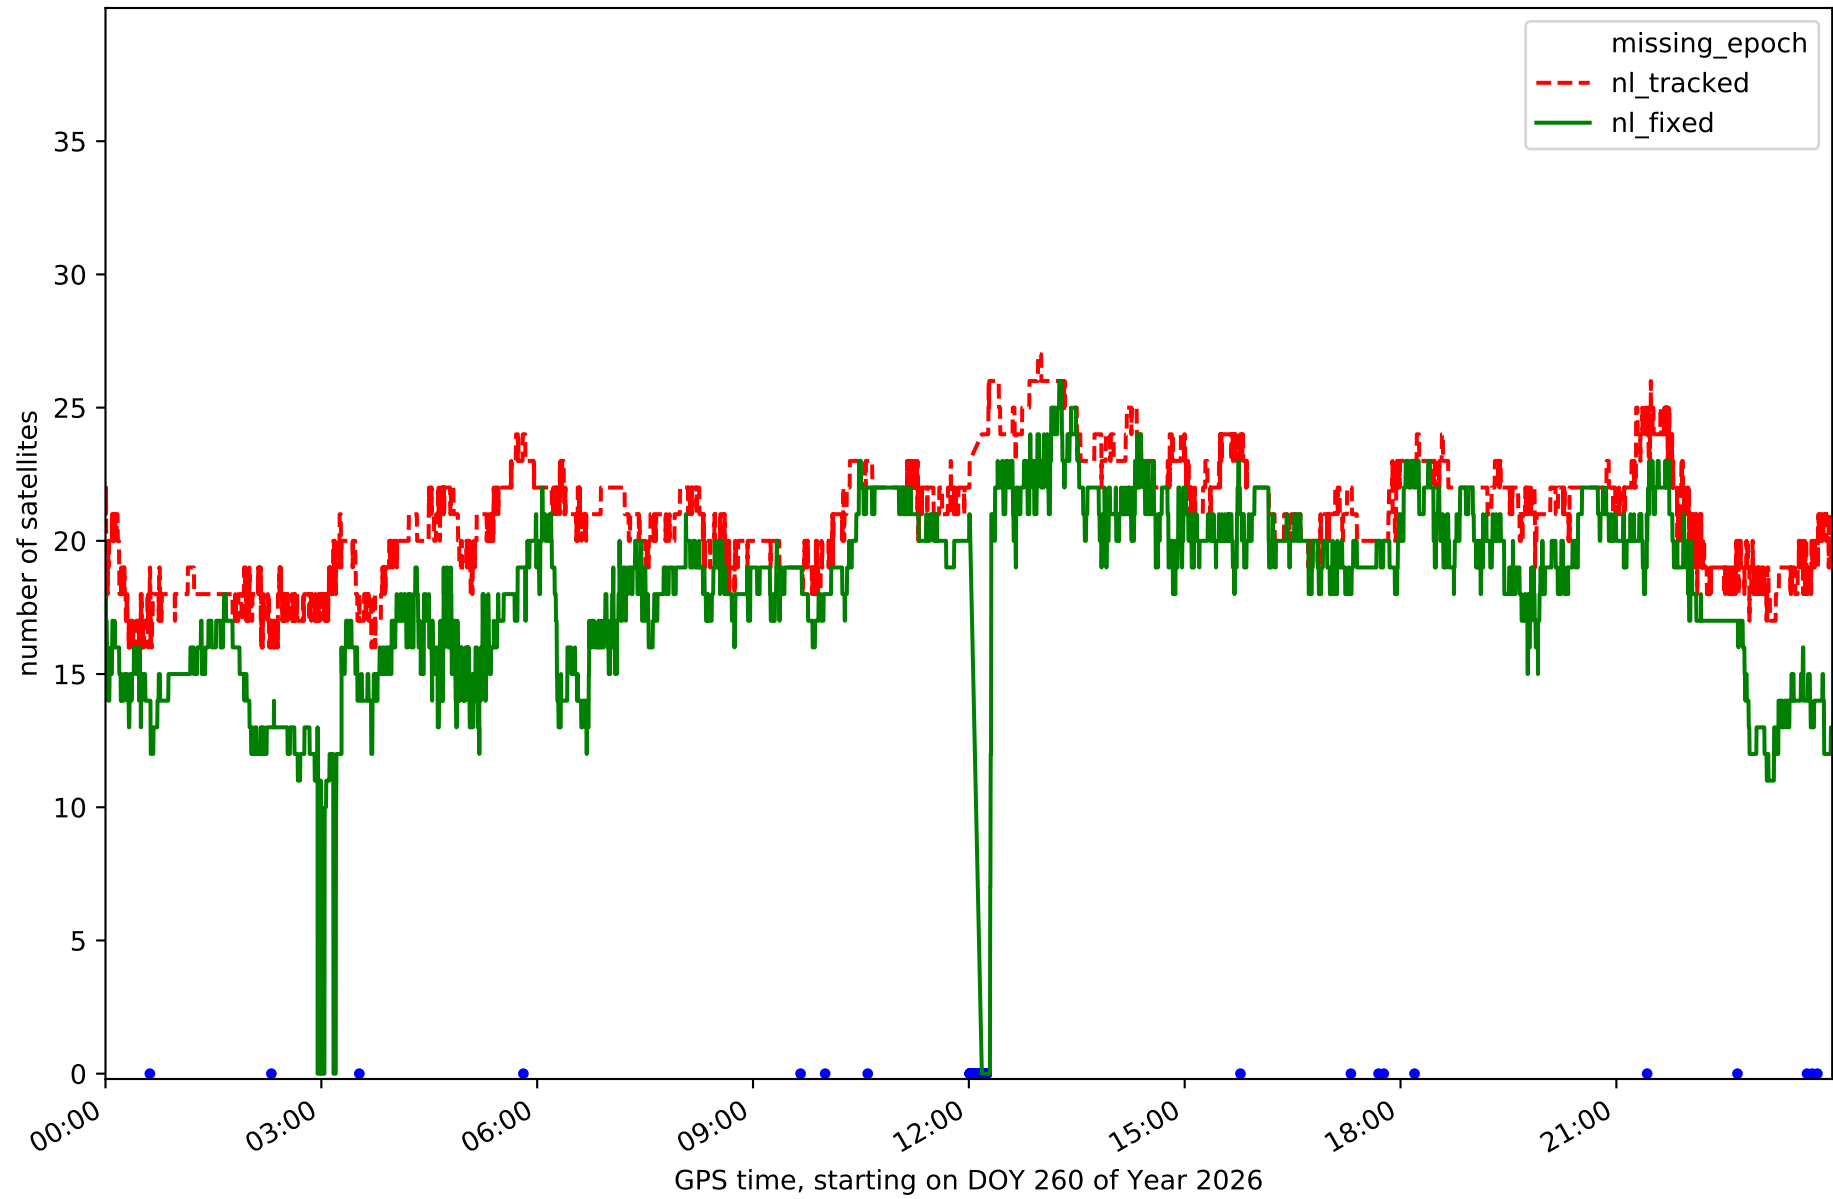


Station GOME in network NT32

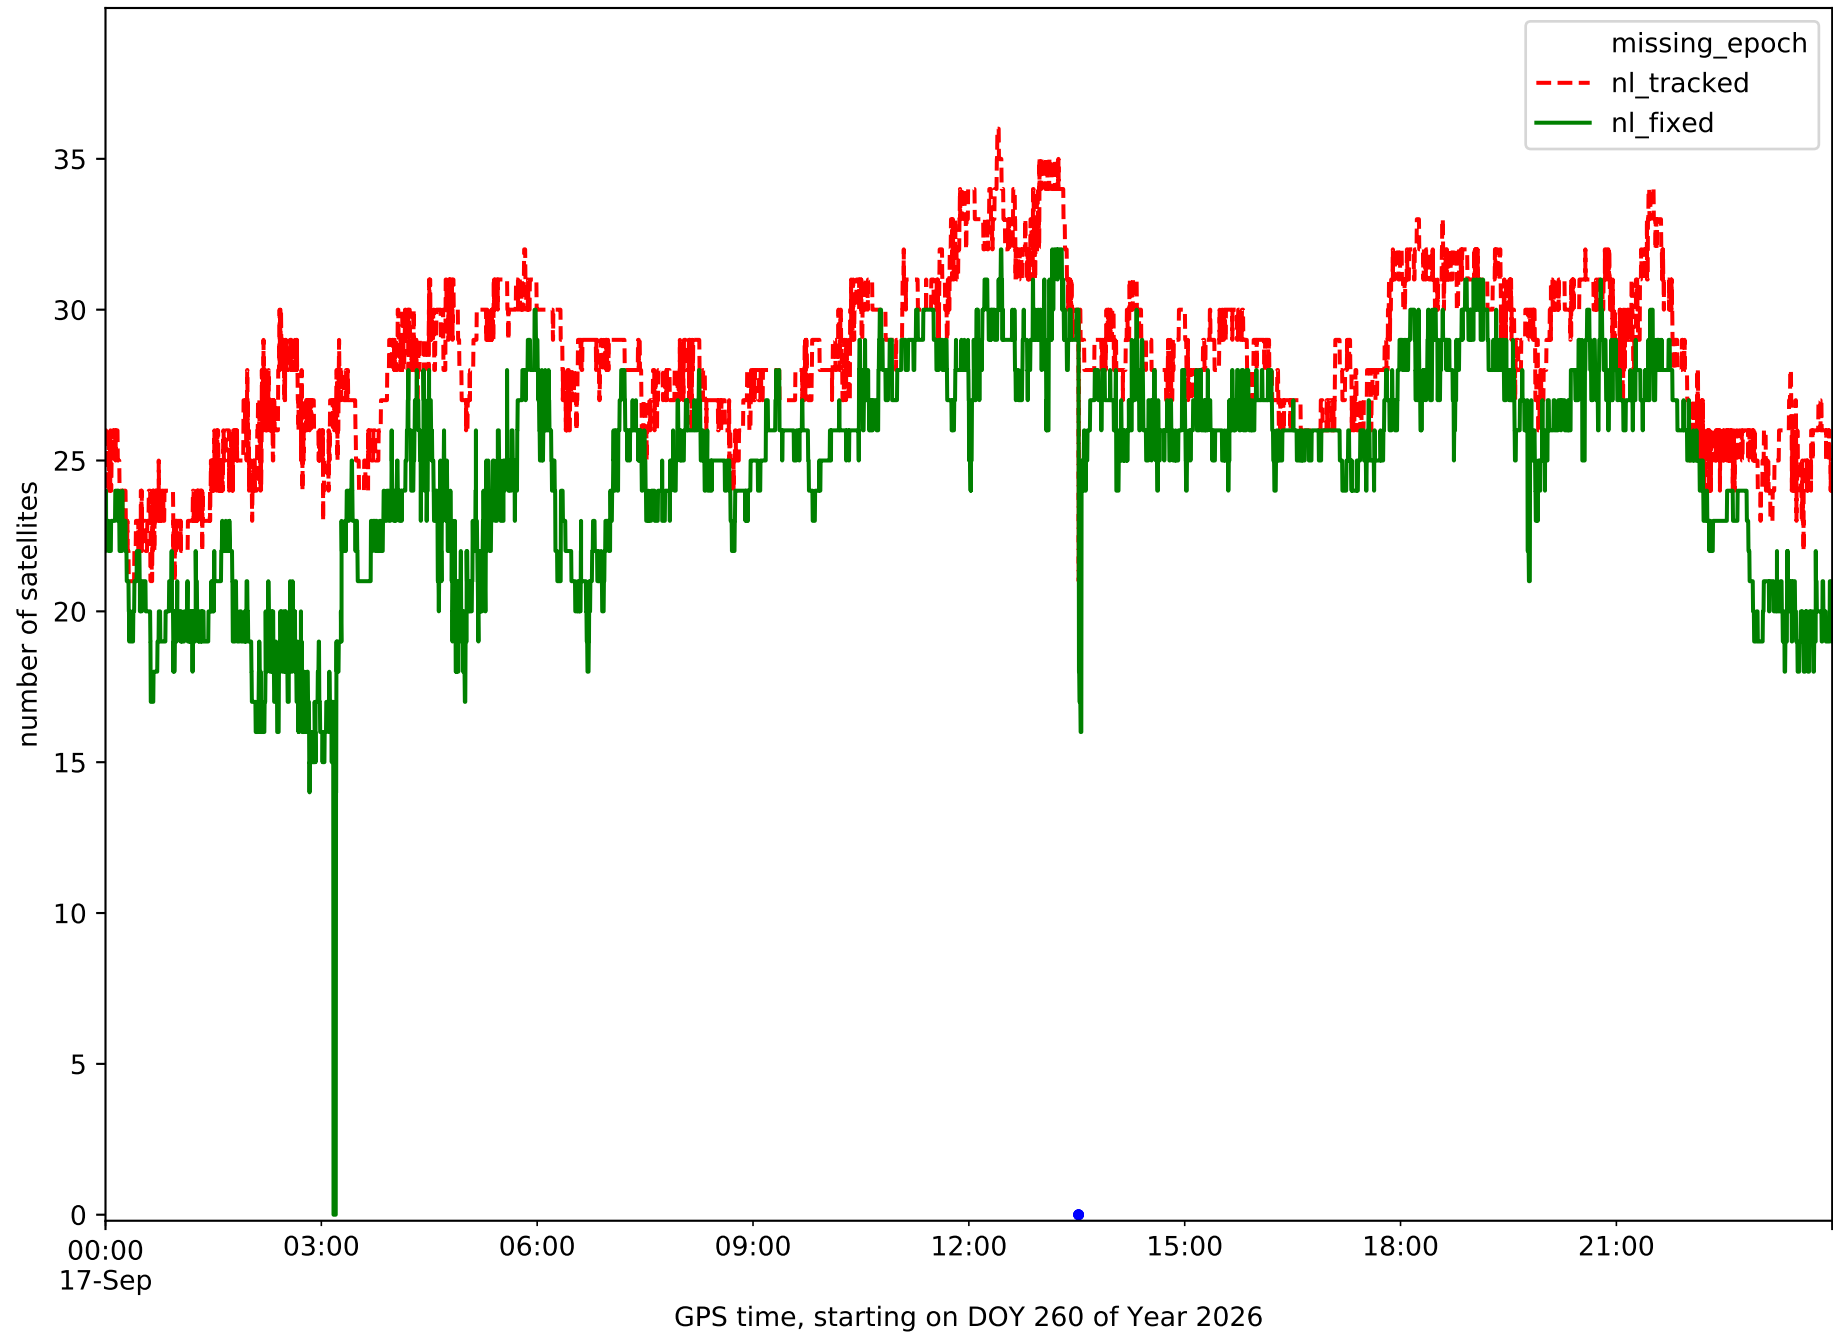


Station IZAN in network NT32

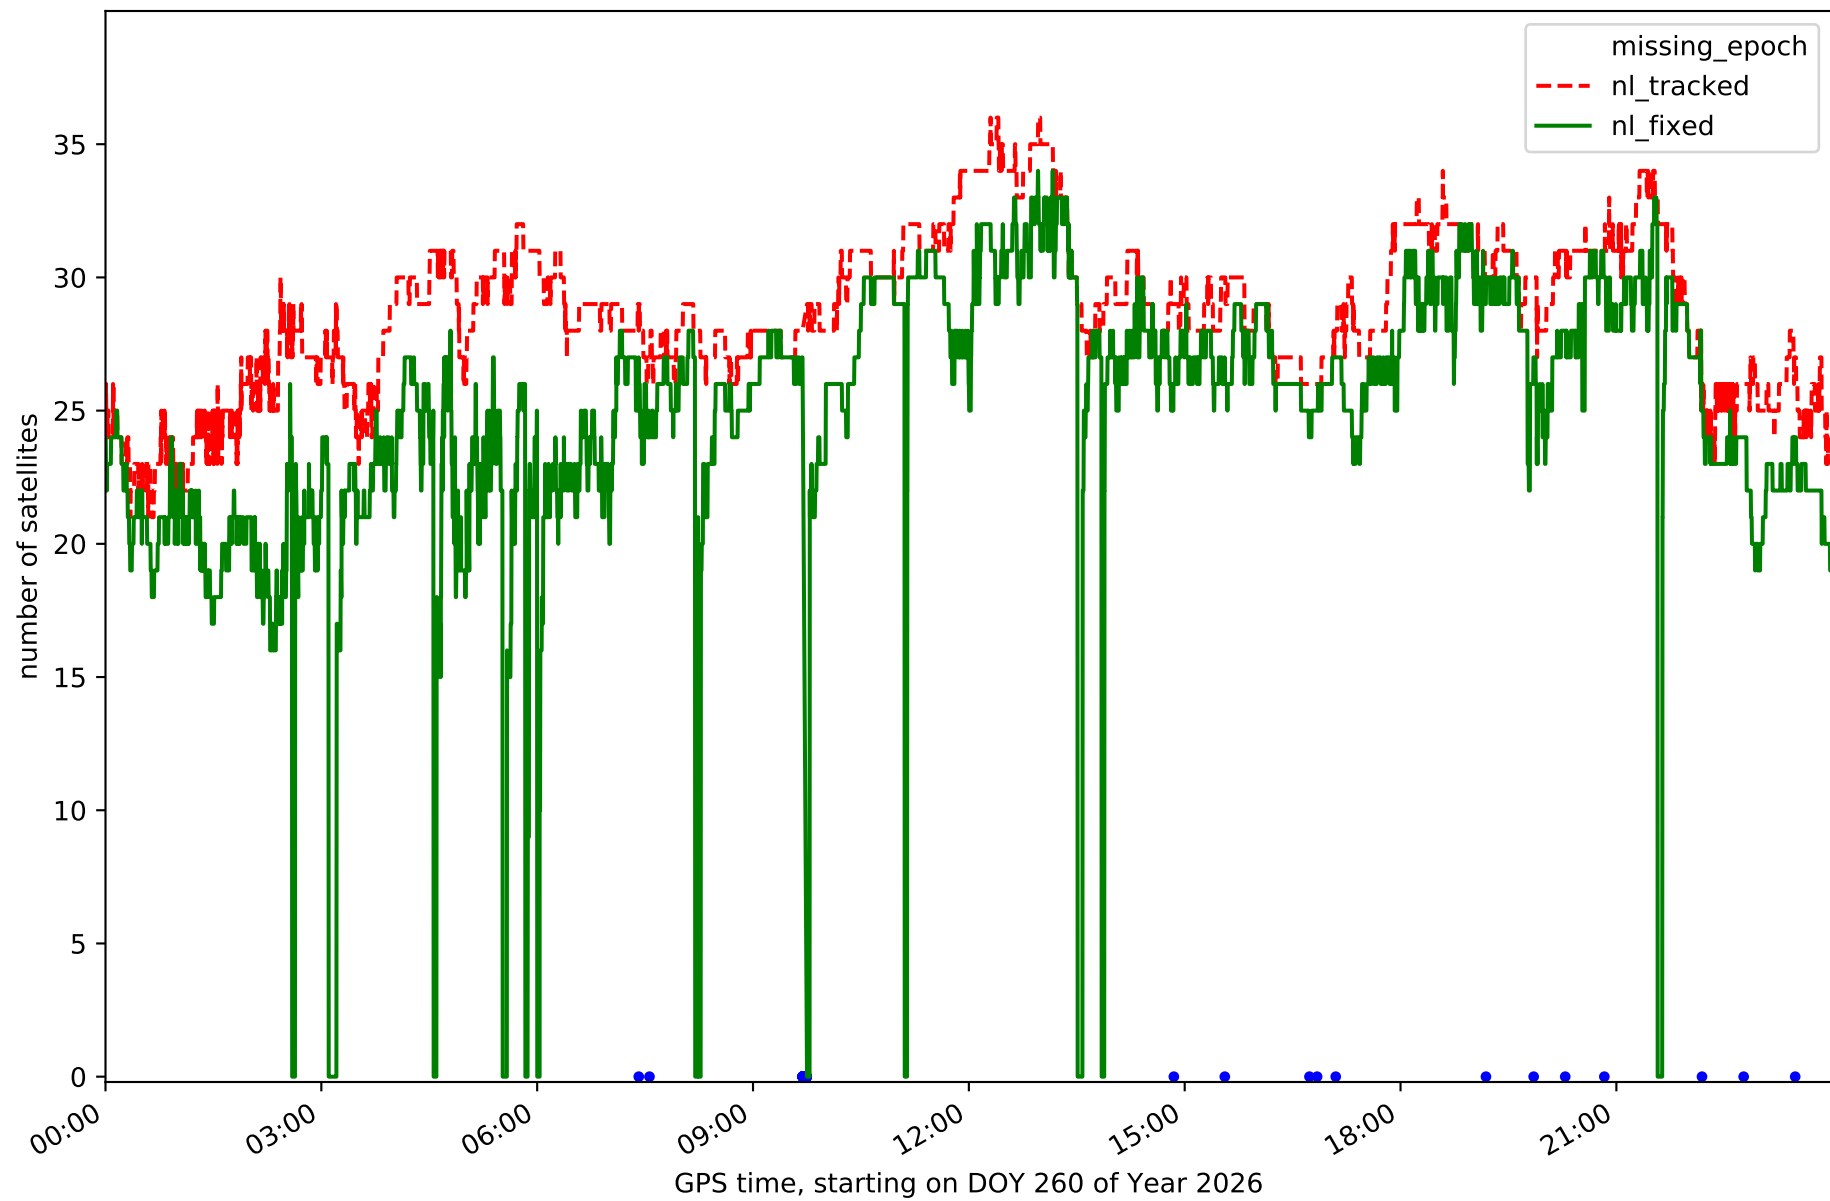


Station LP01 in network NT32

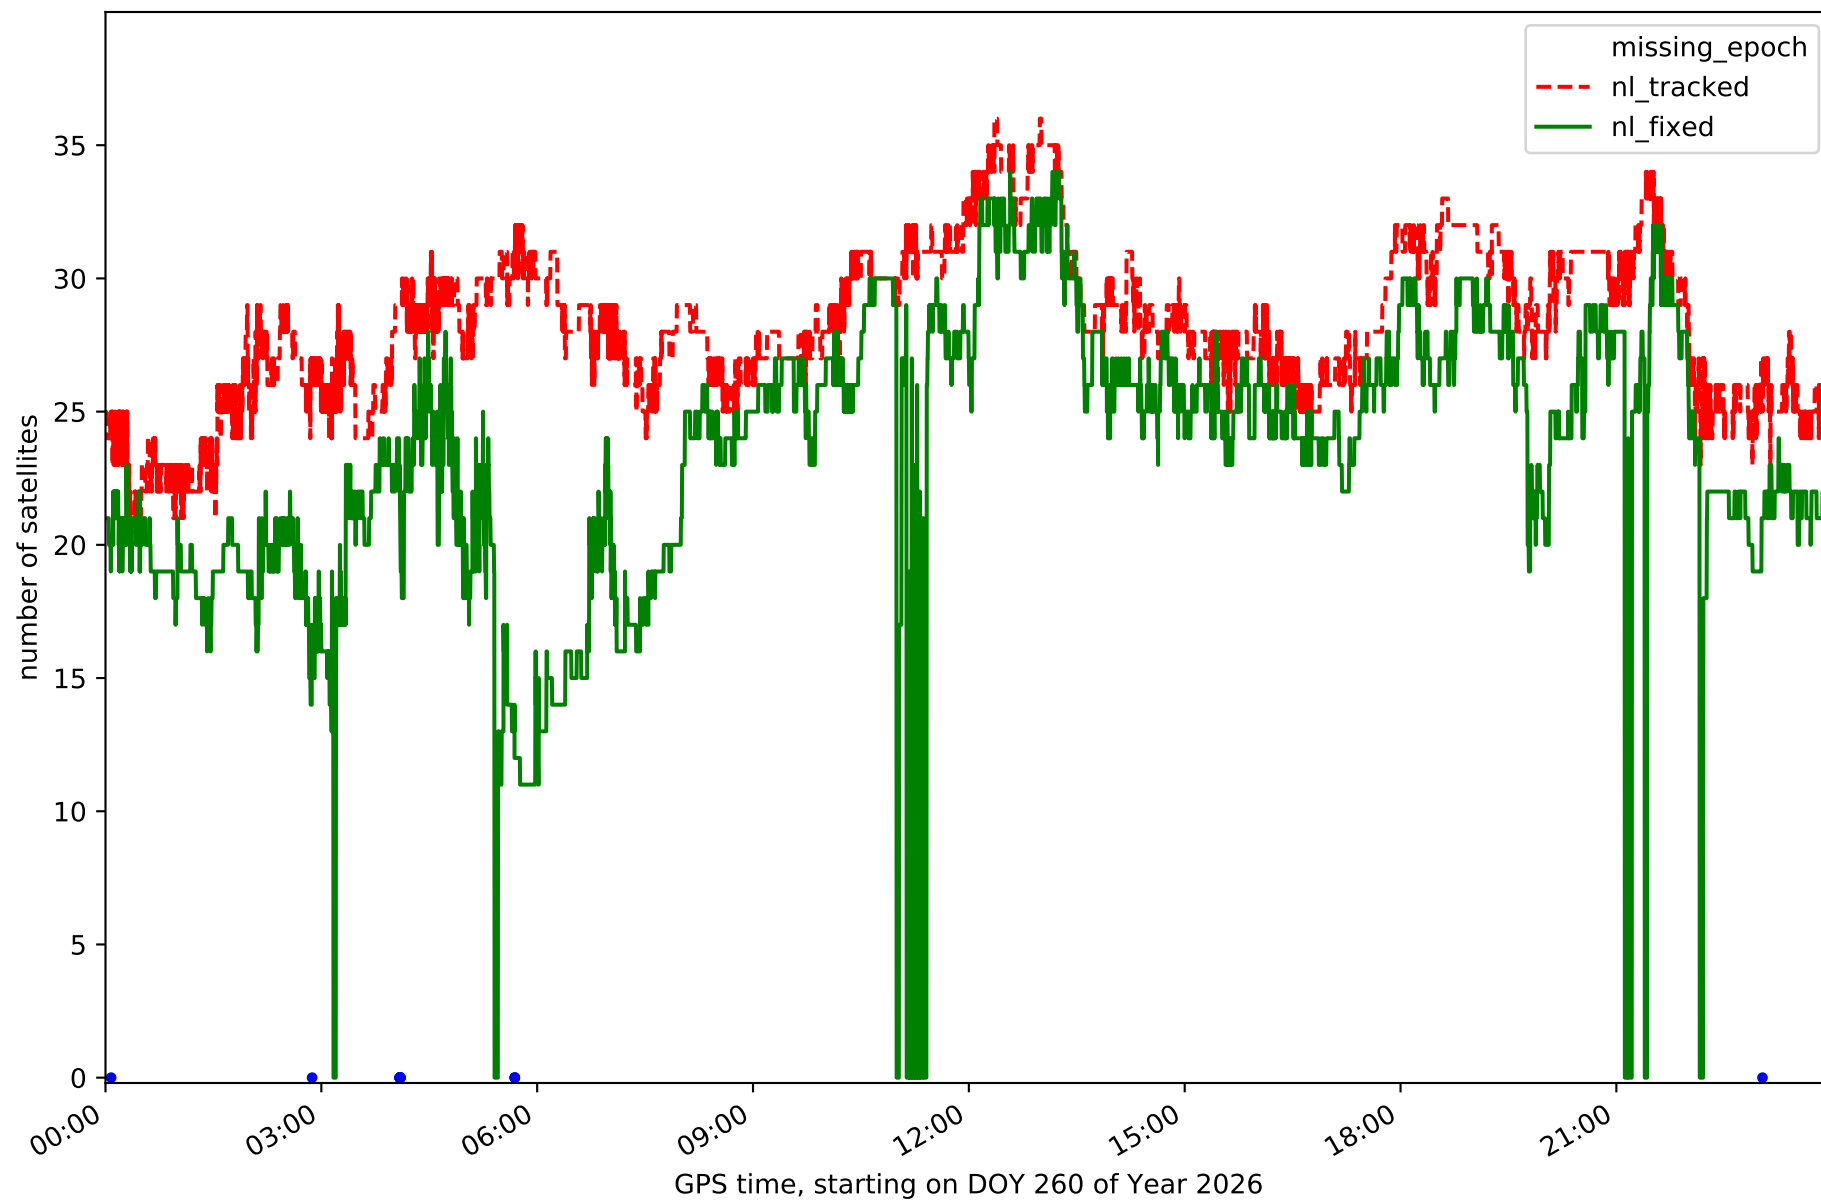


Station LP03 in network NT32

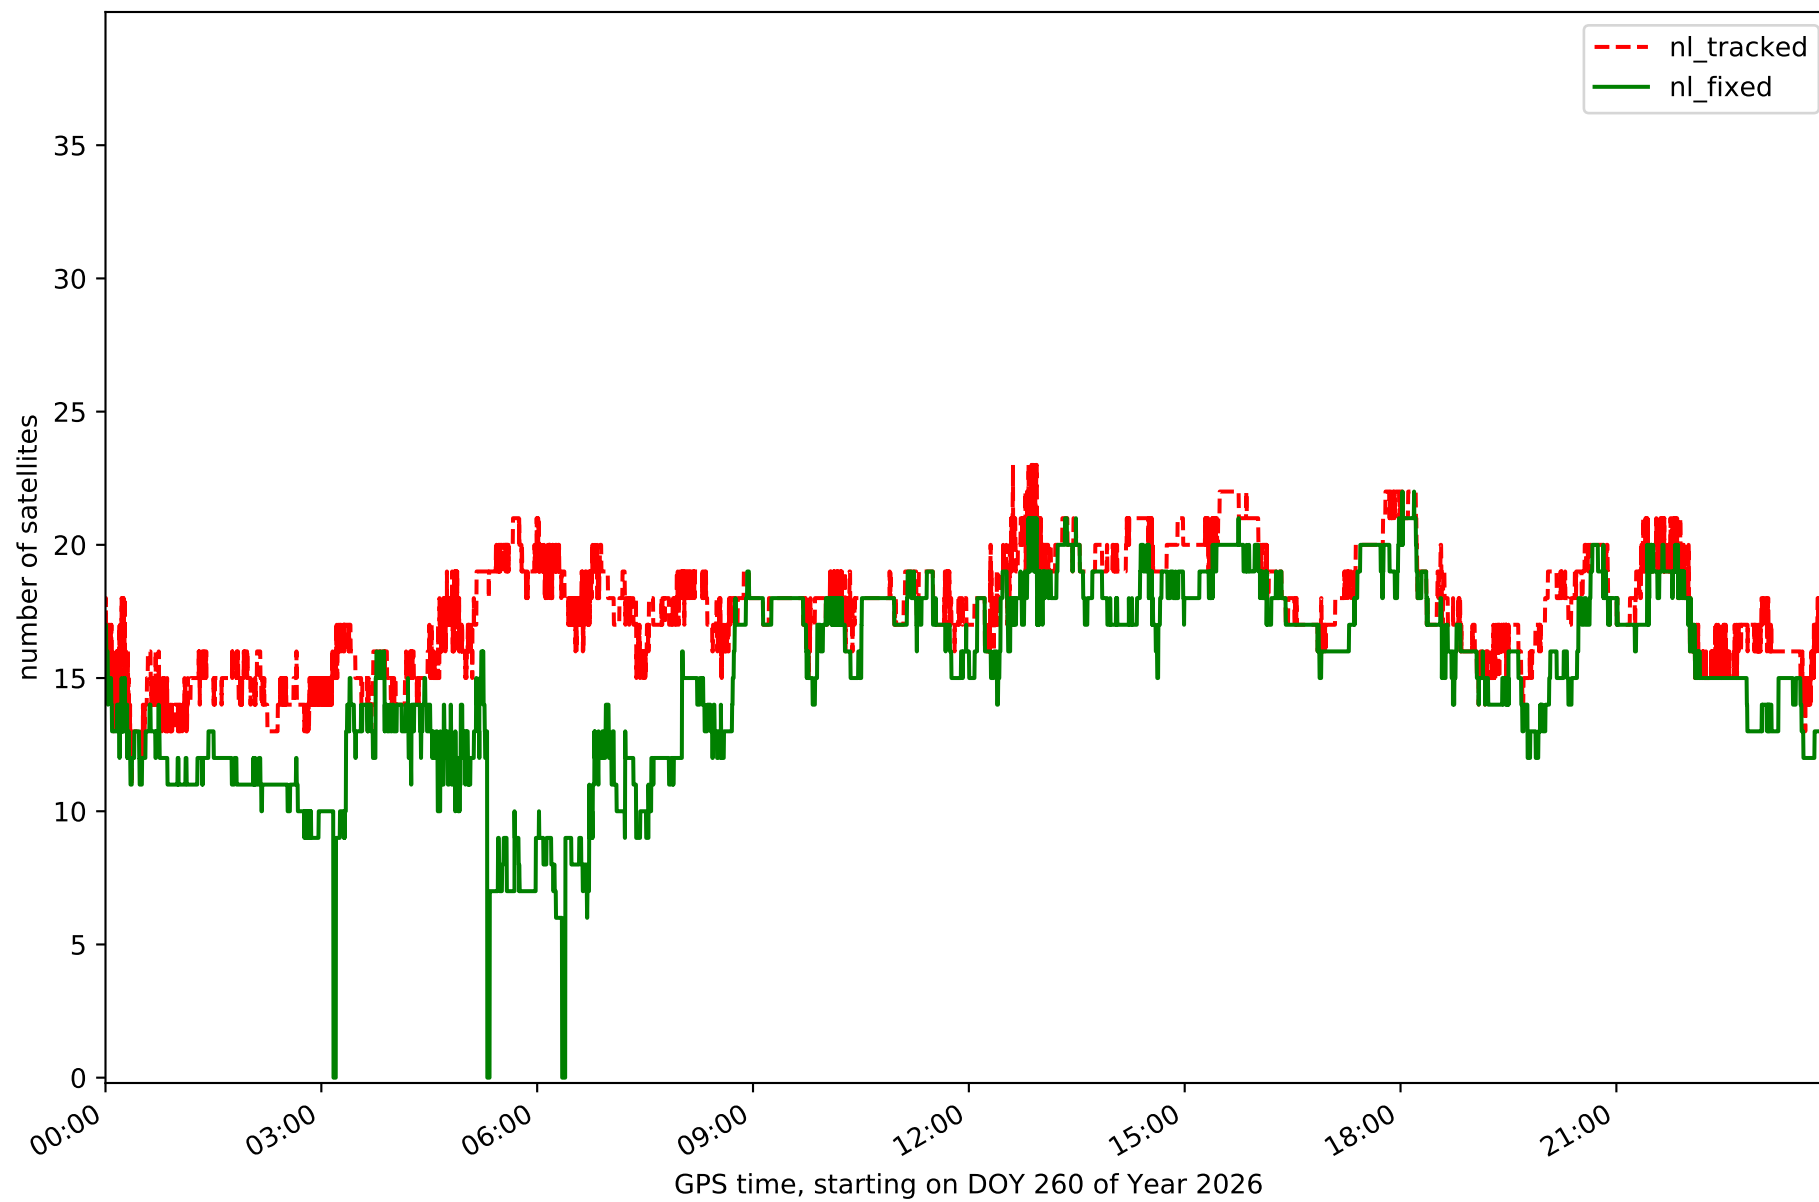


Station LPAL in network NT32

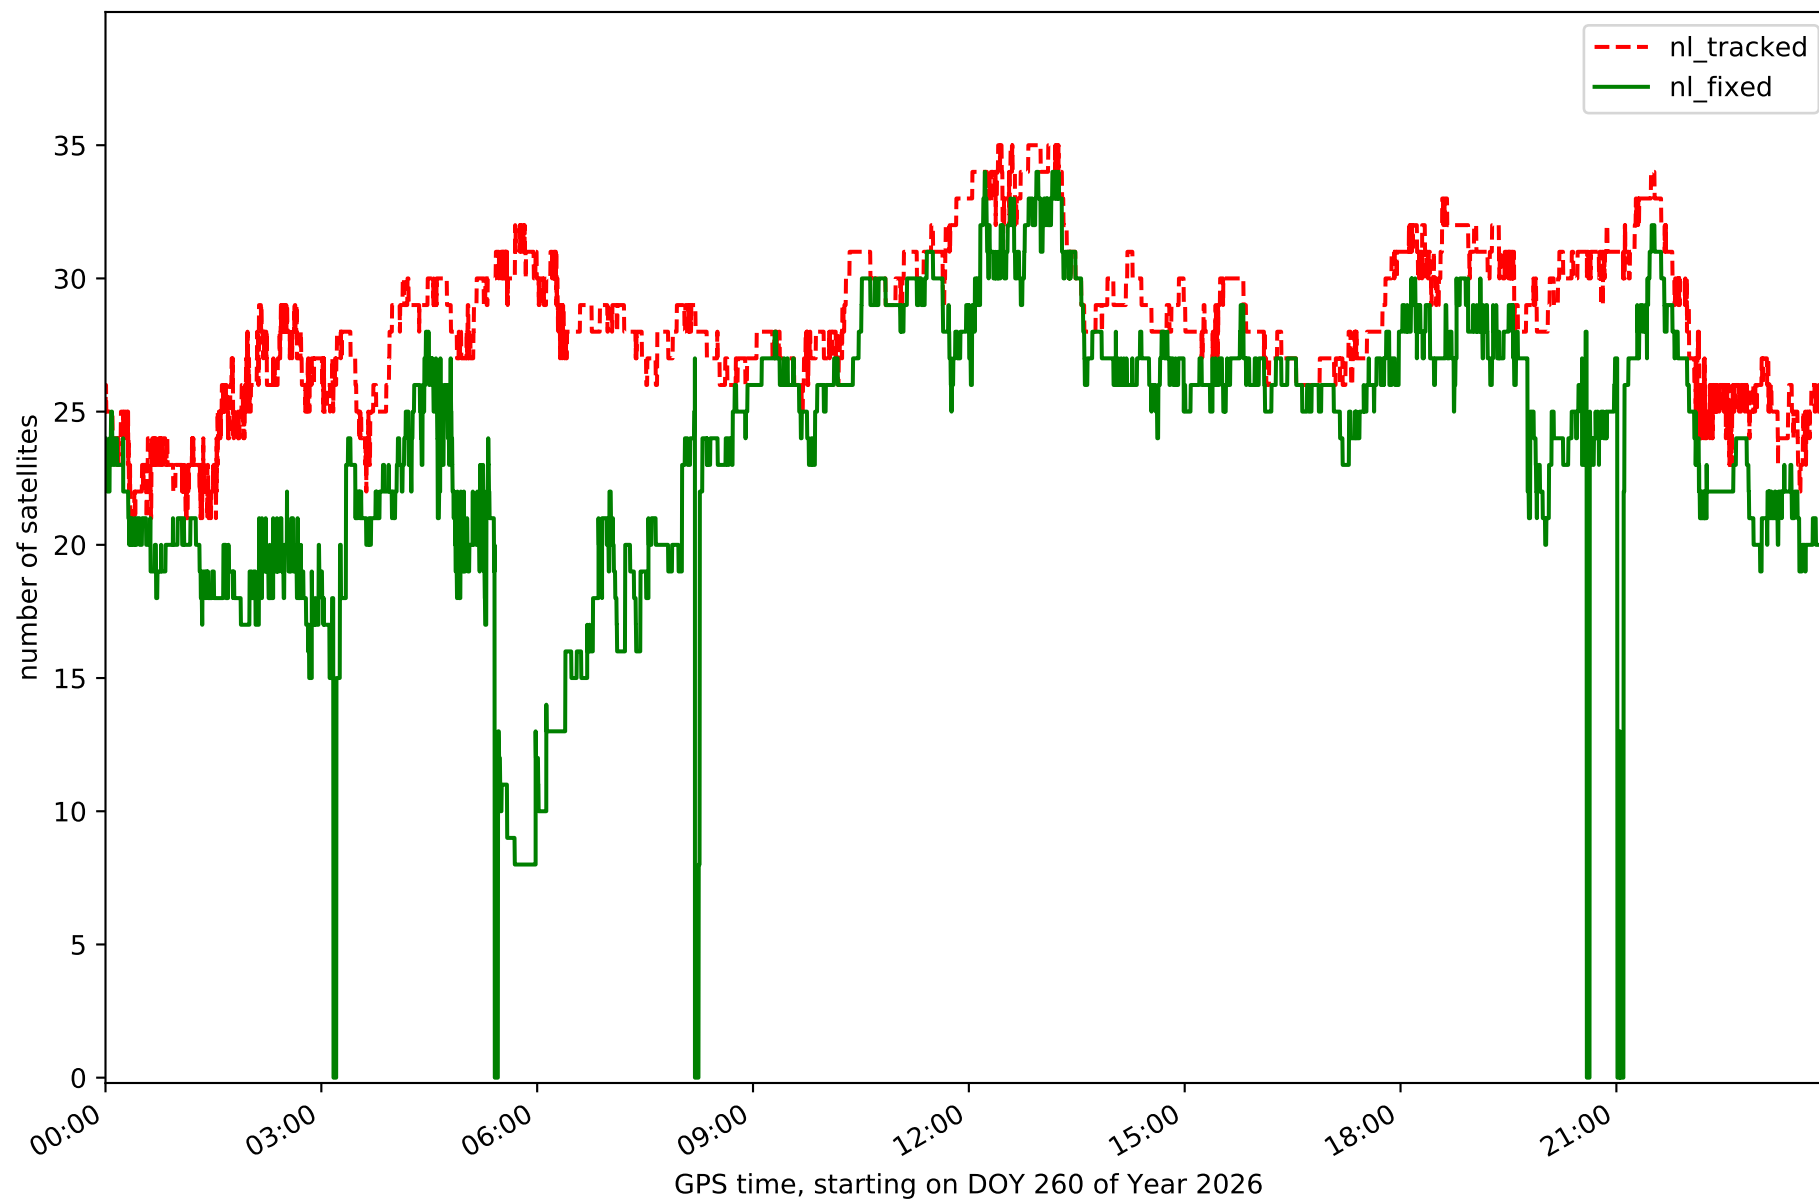


Station LRES in network NT32

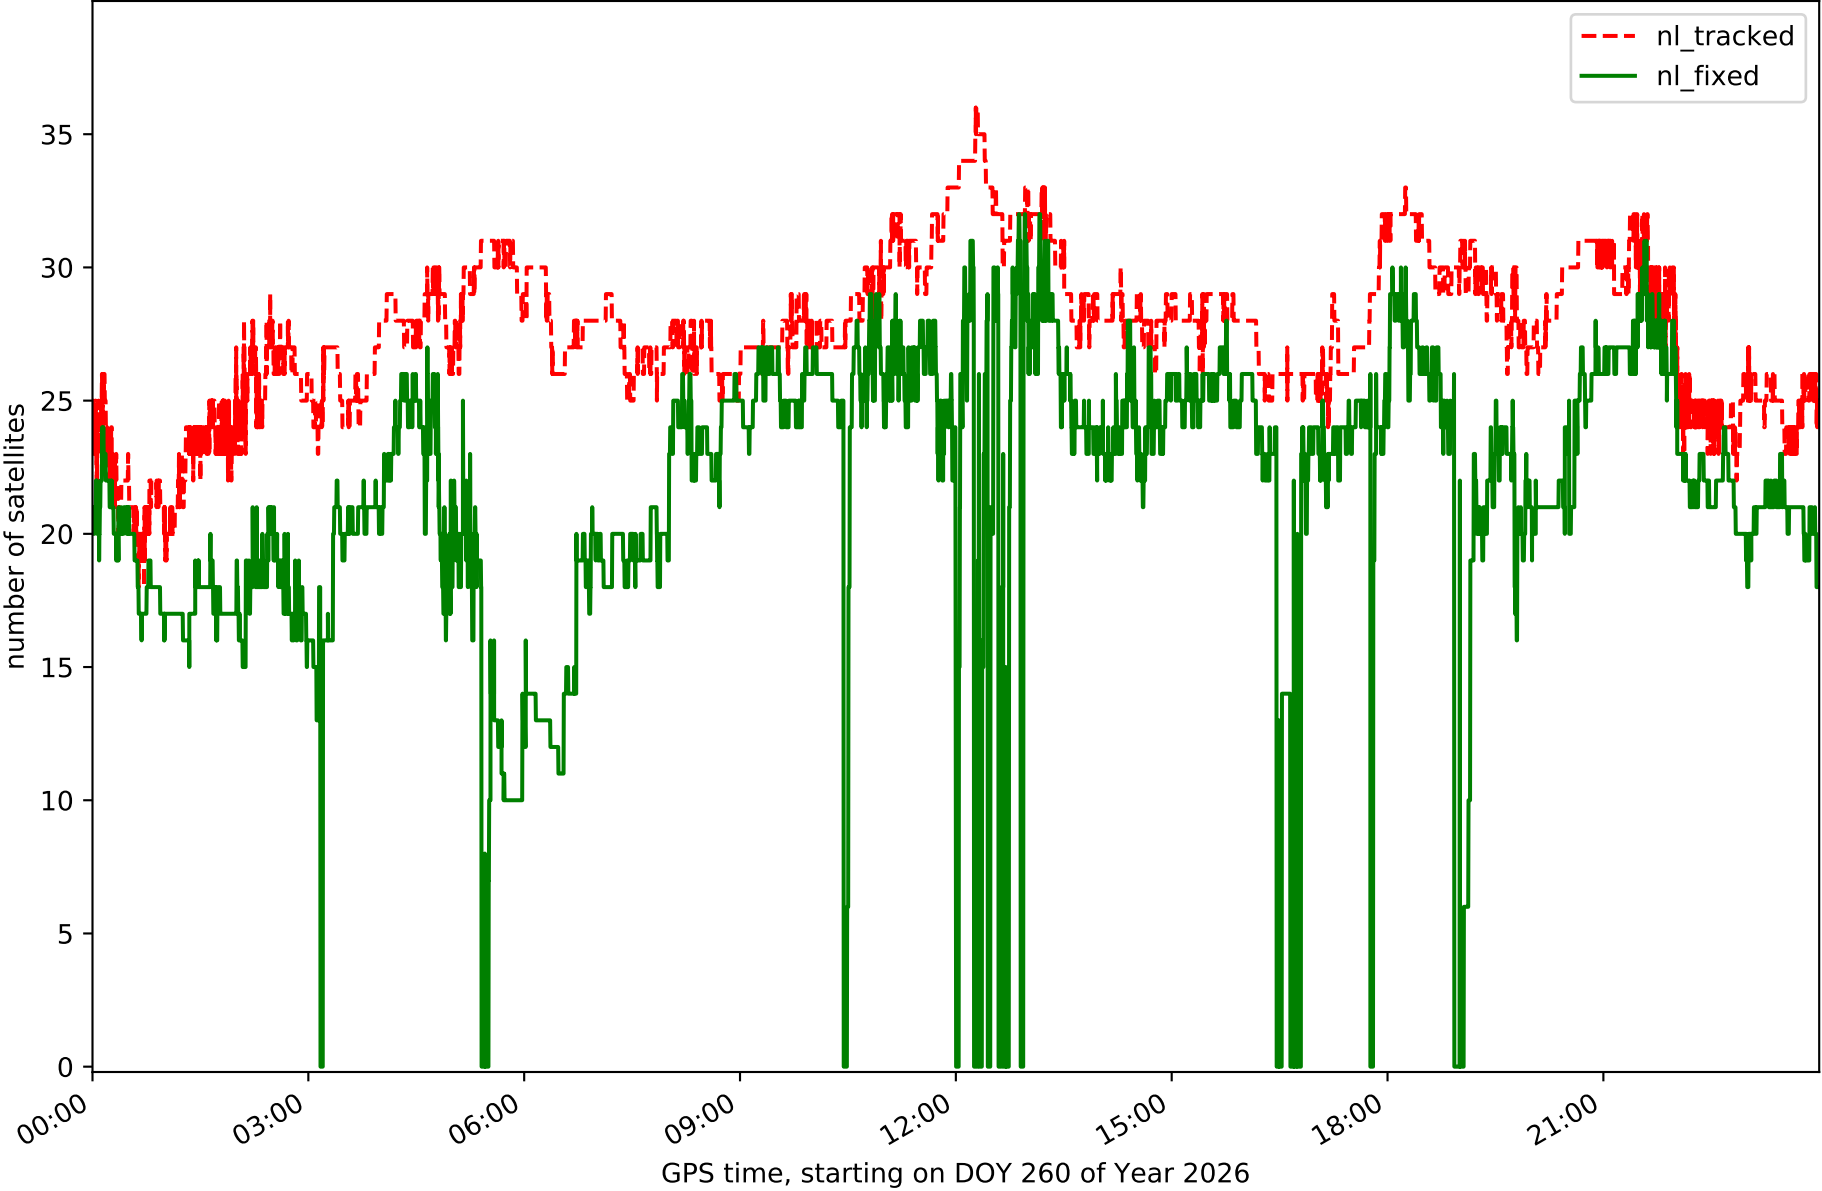


Station TN01 in network NT32

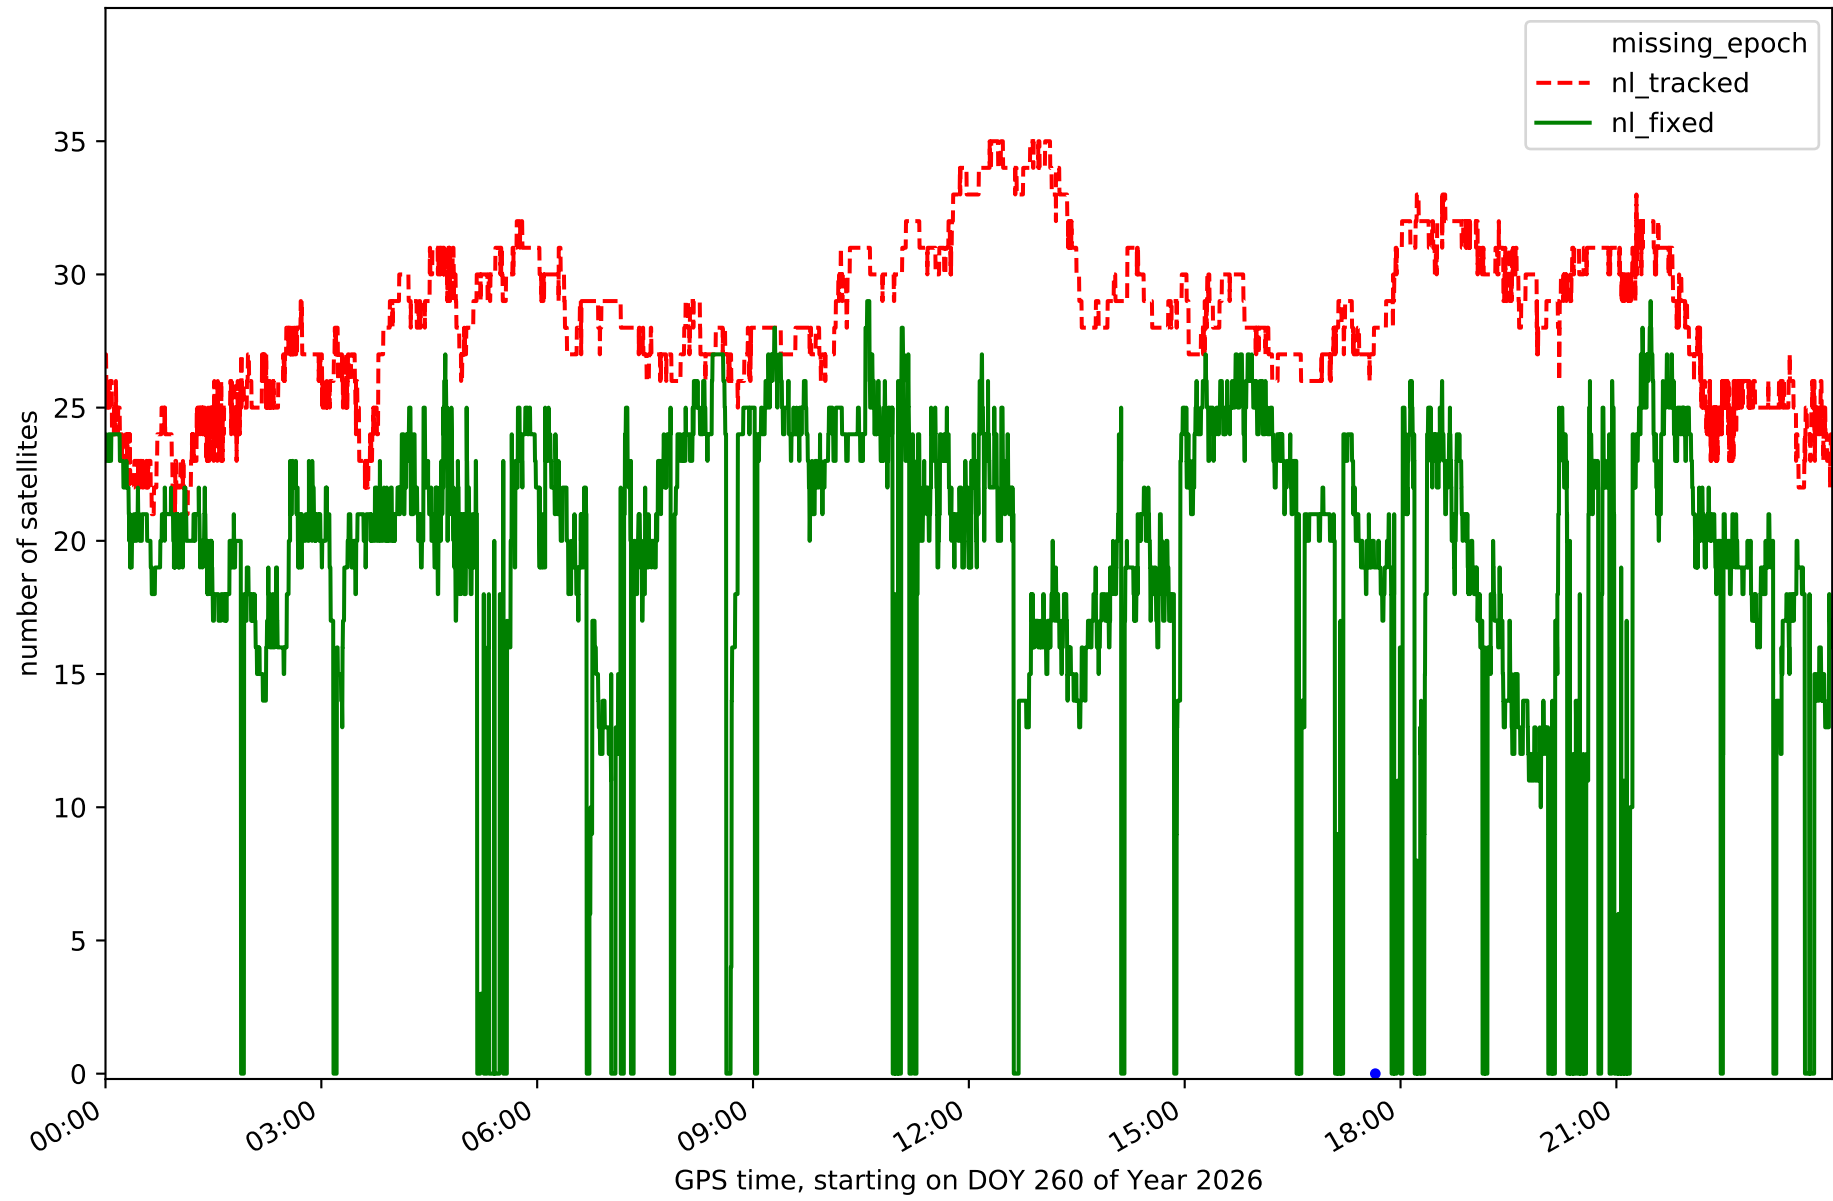


Station TN02 in network NT32

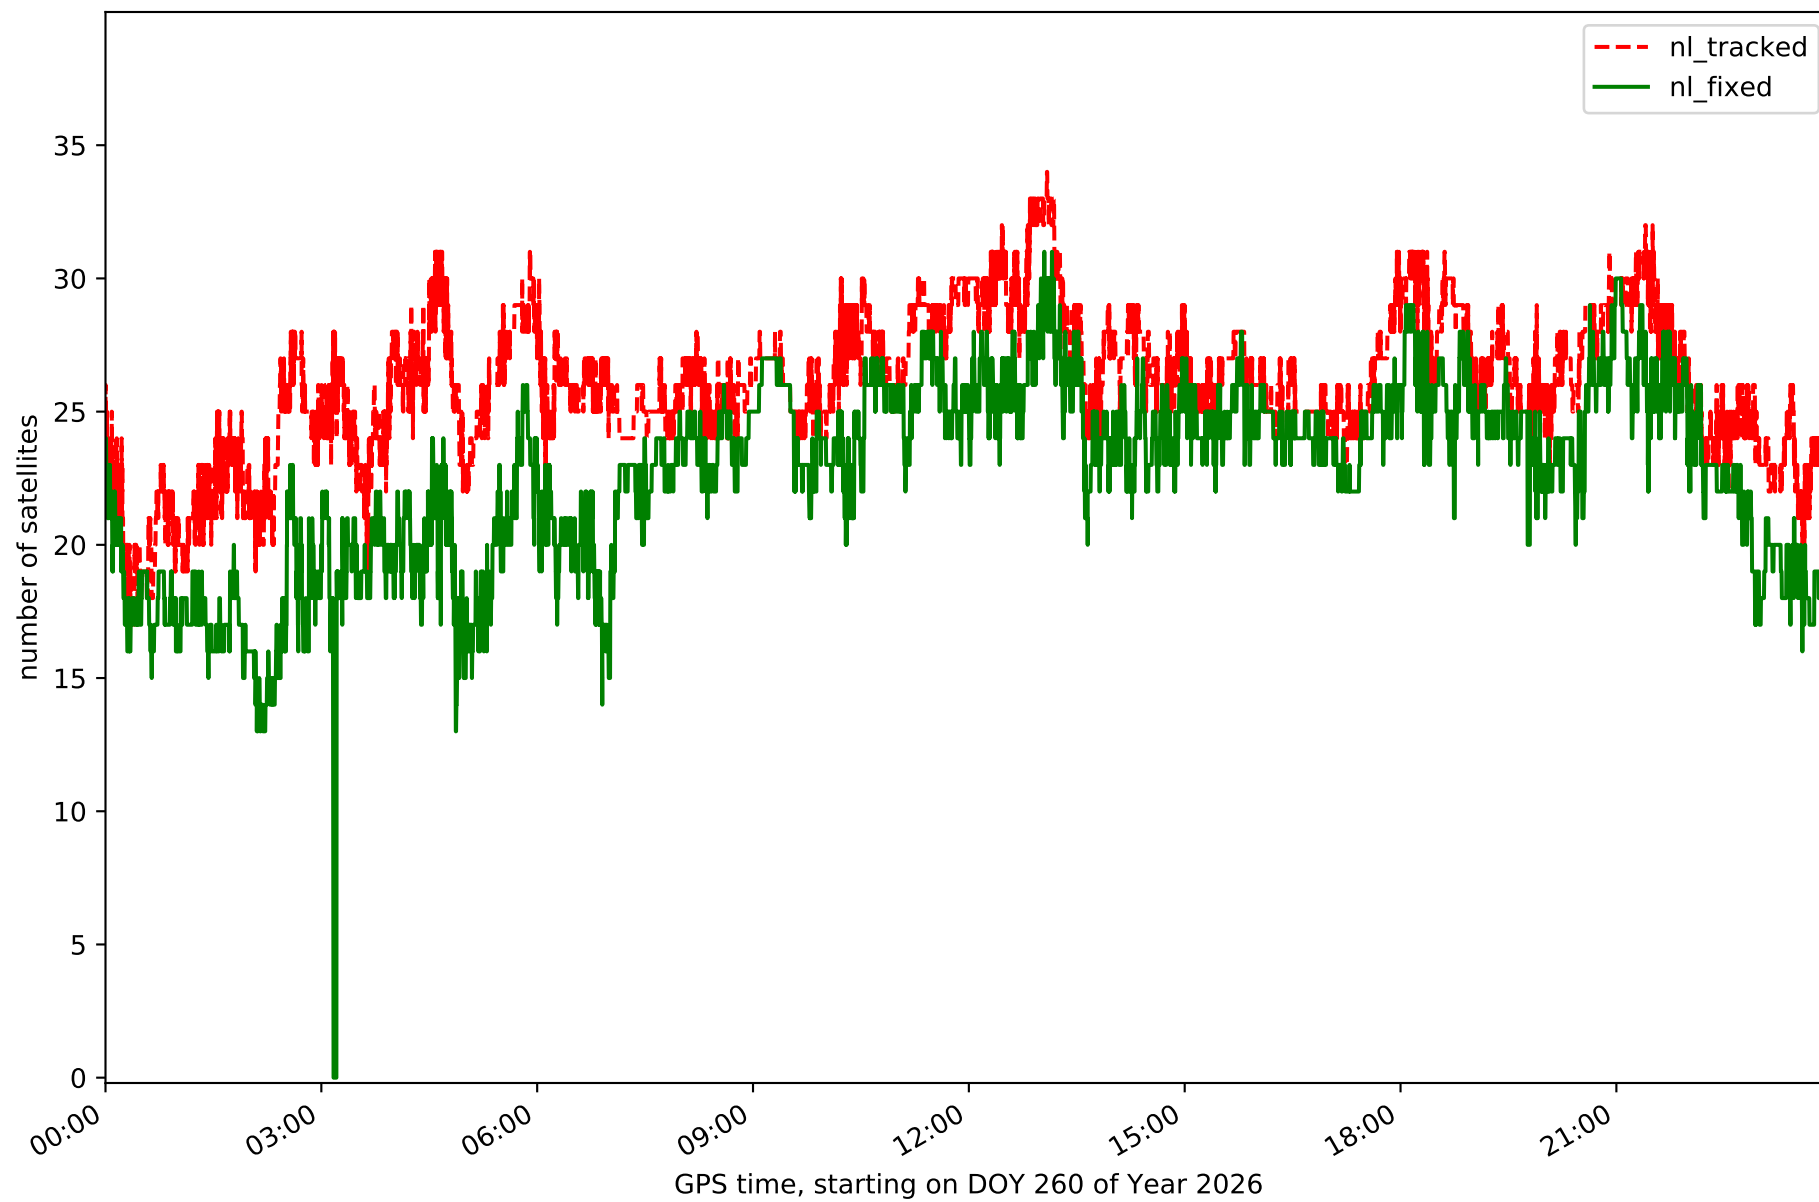


Station TN03 in network NT32

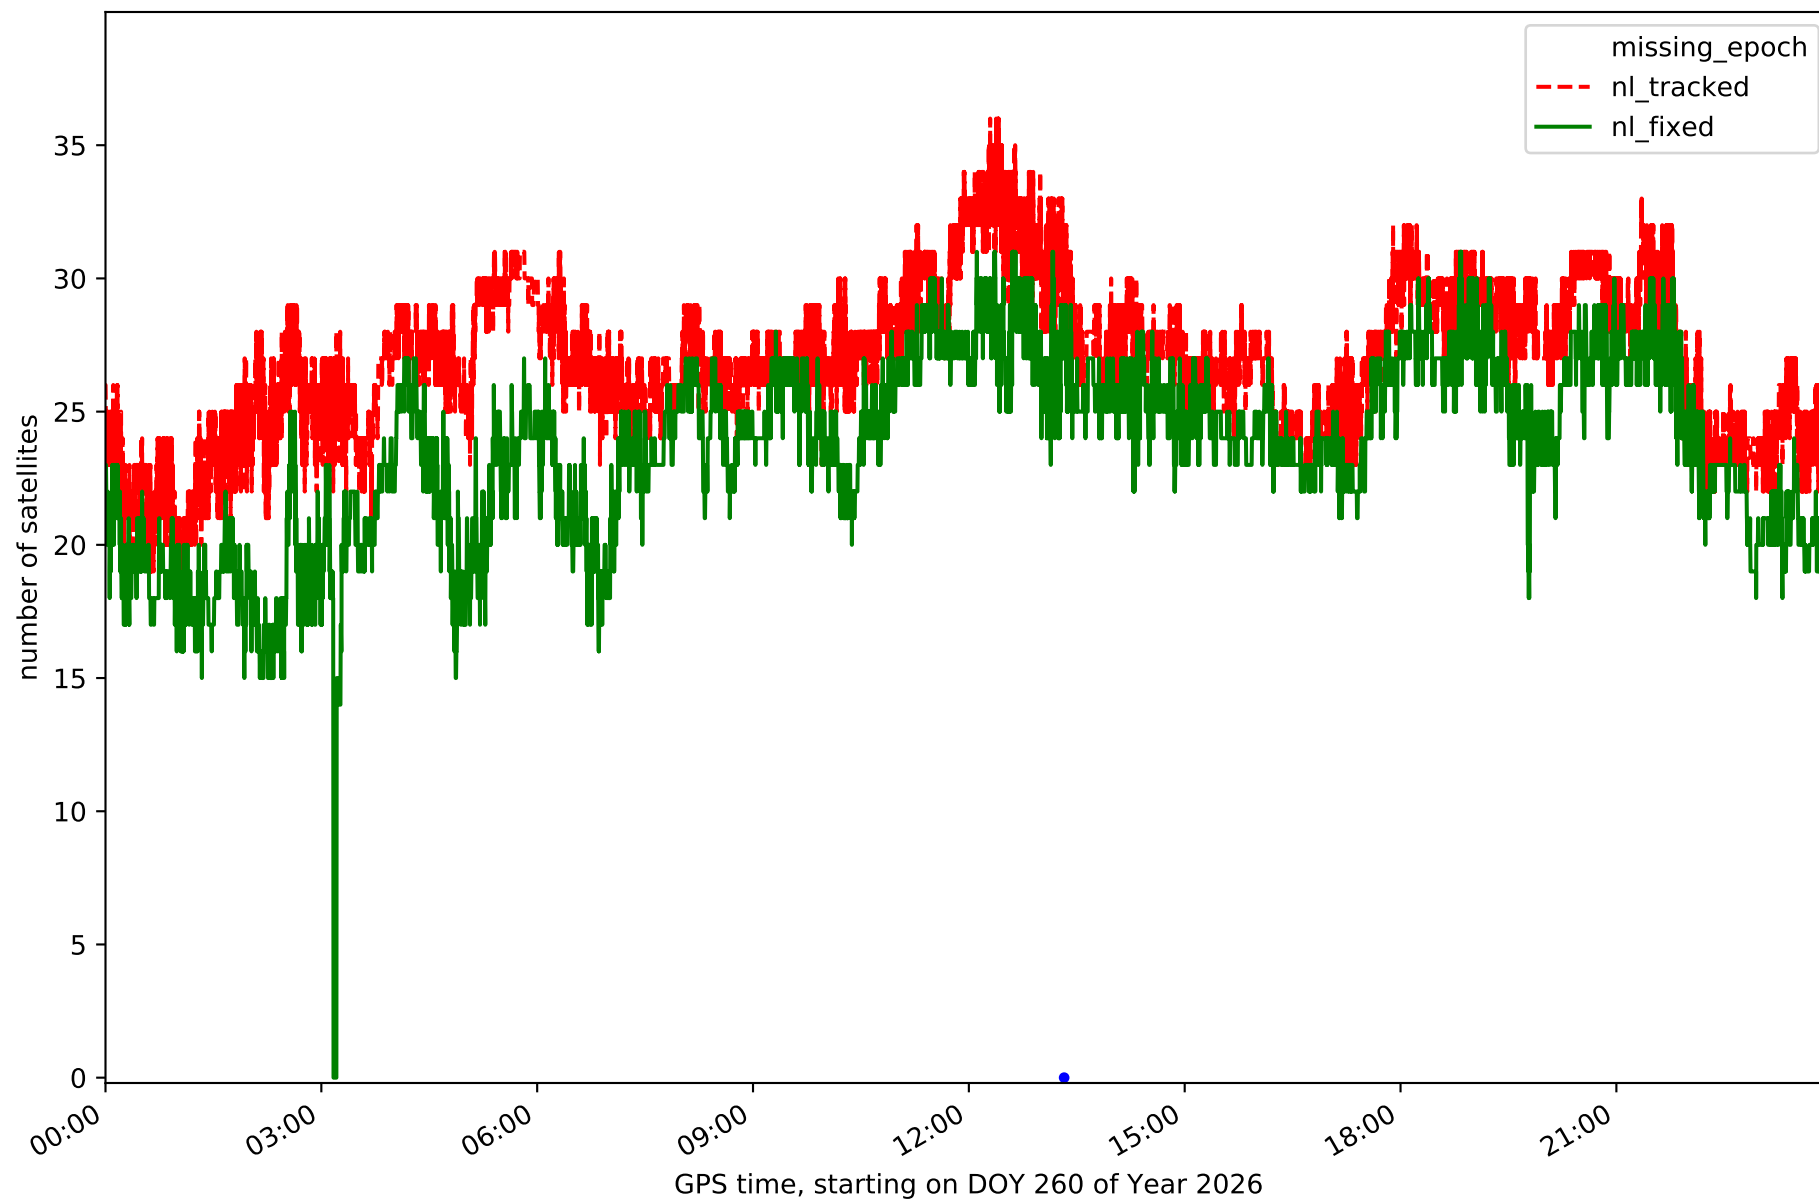


Station TN06 in network NT32

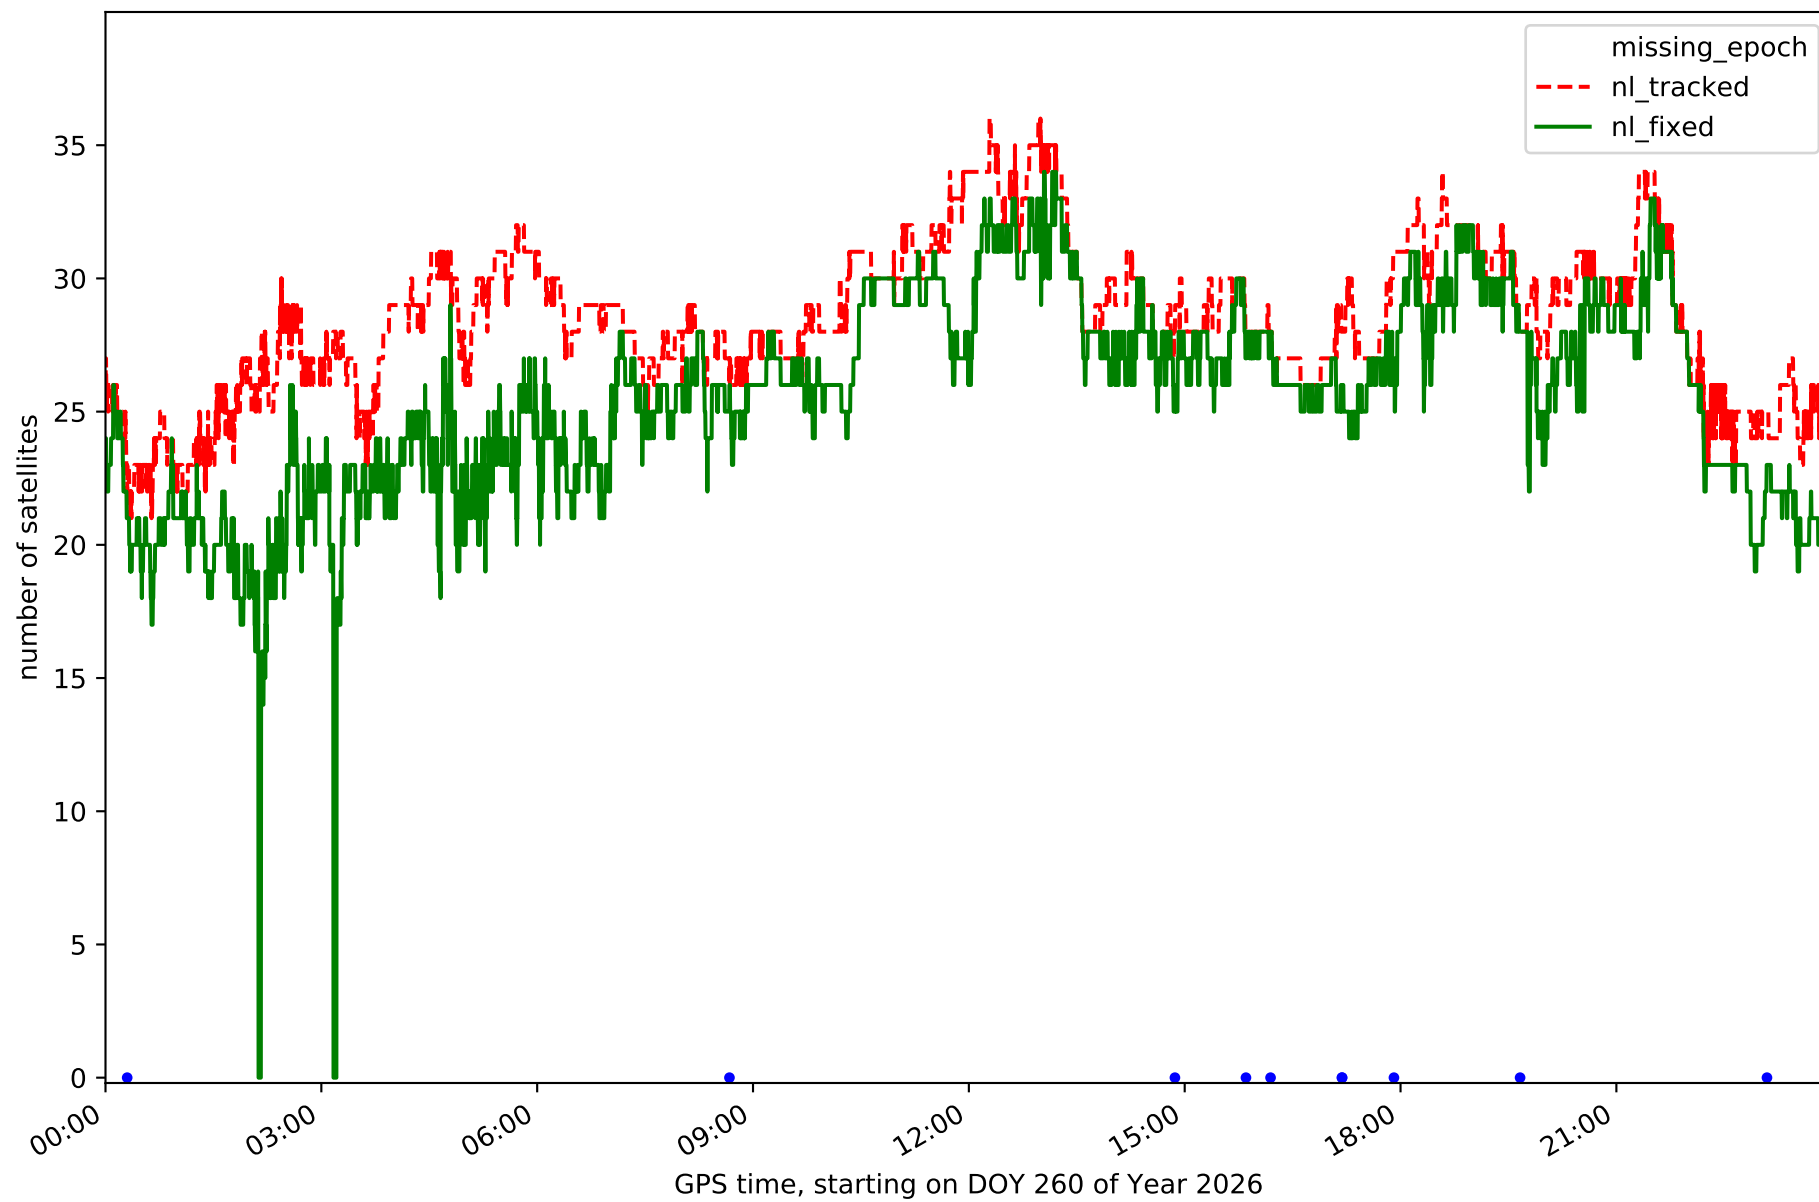


Station TN09 in network NT32

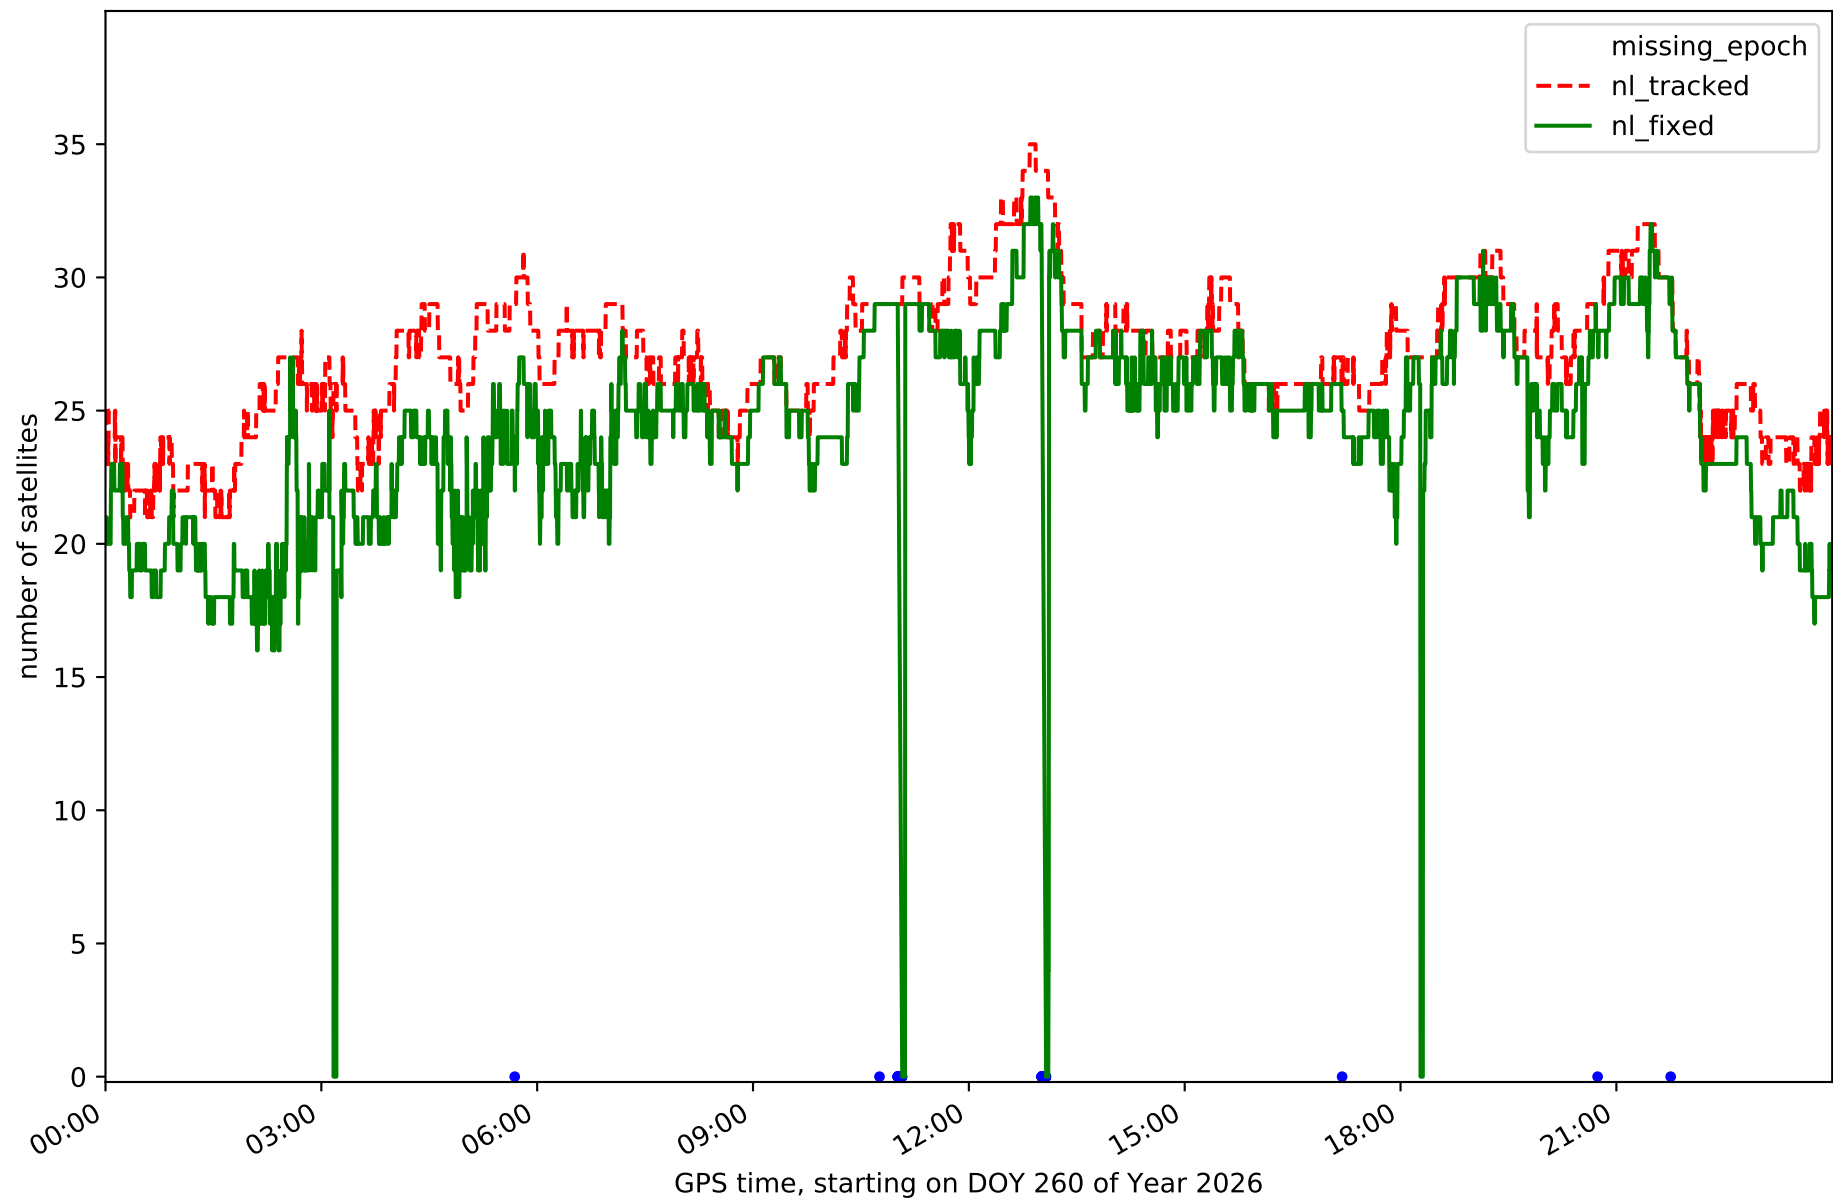


Station TE11 in network NT32

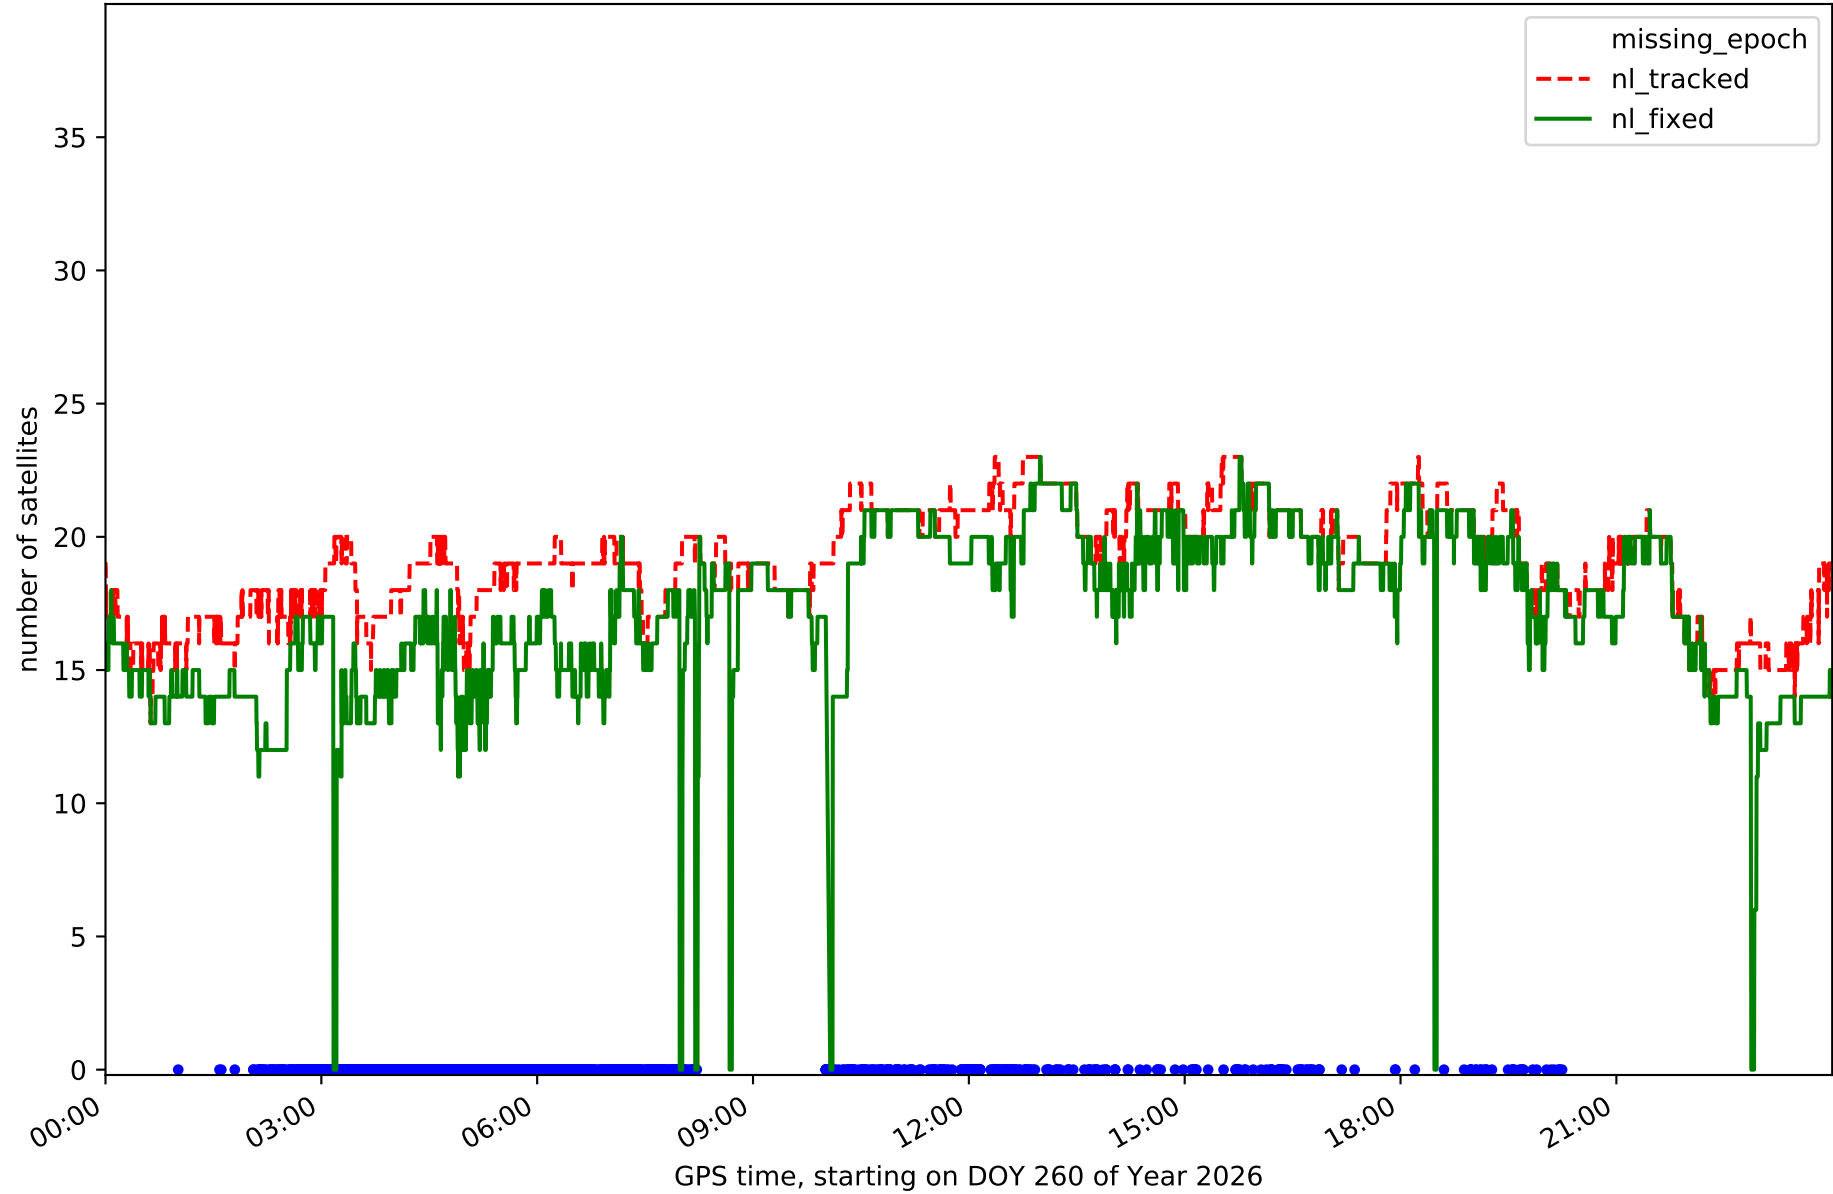


RefCheck for station EH01 in network NT32

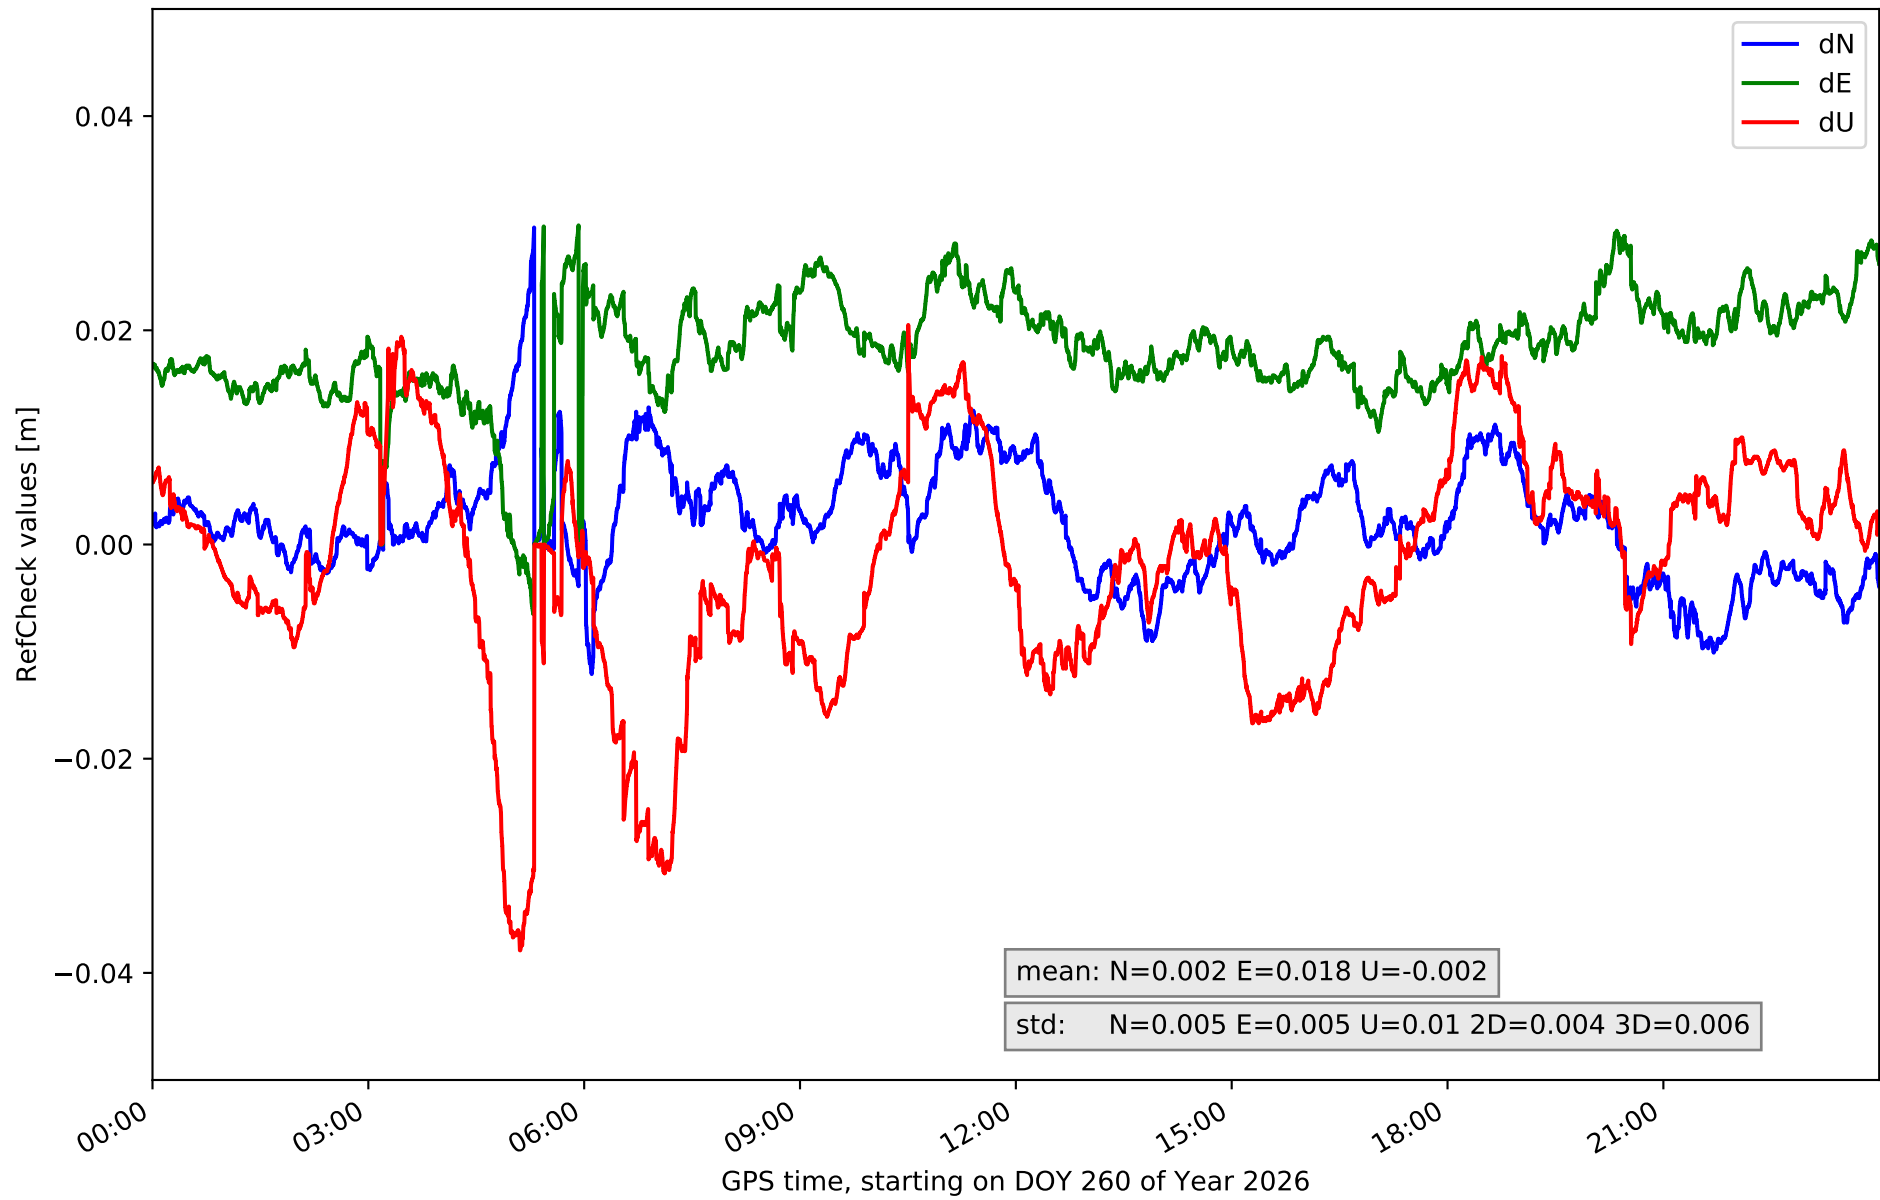


RefCheck for station EH02 in network NT32

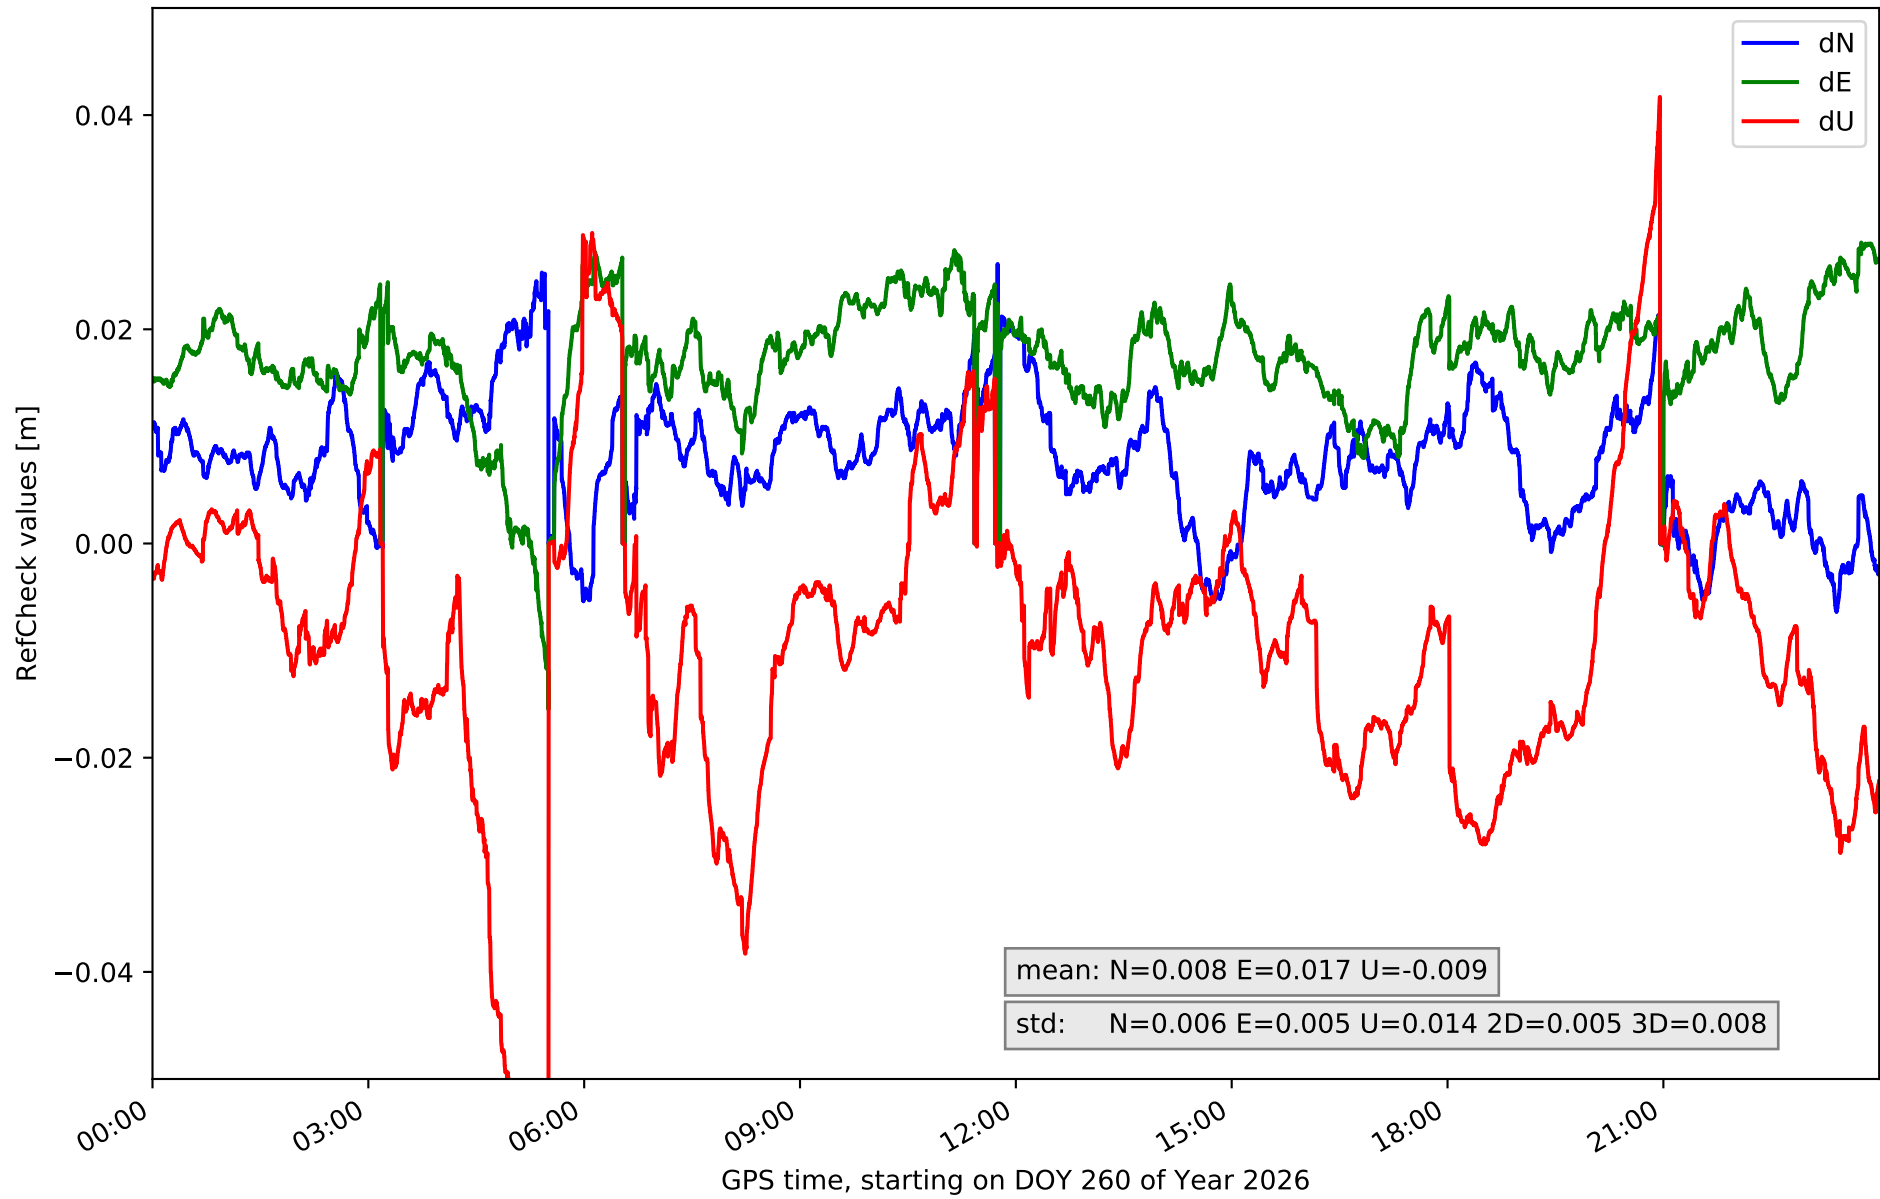


RefCheck for station GOM1 in network NT32

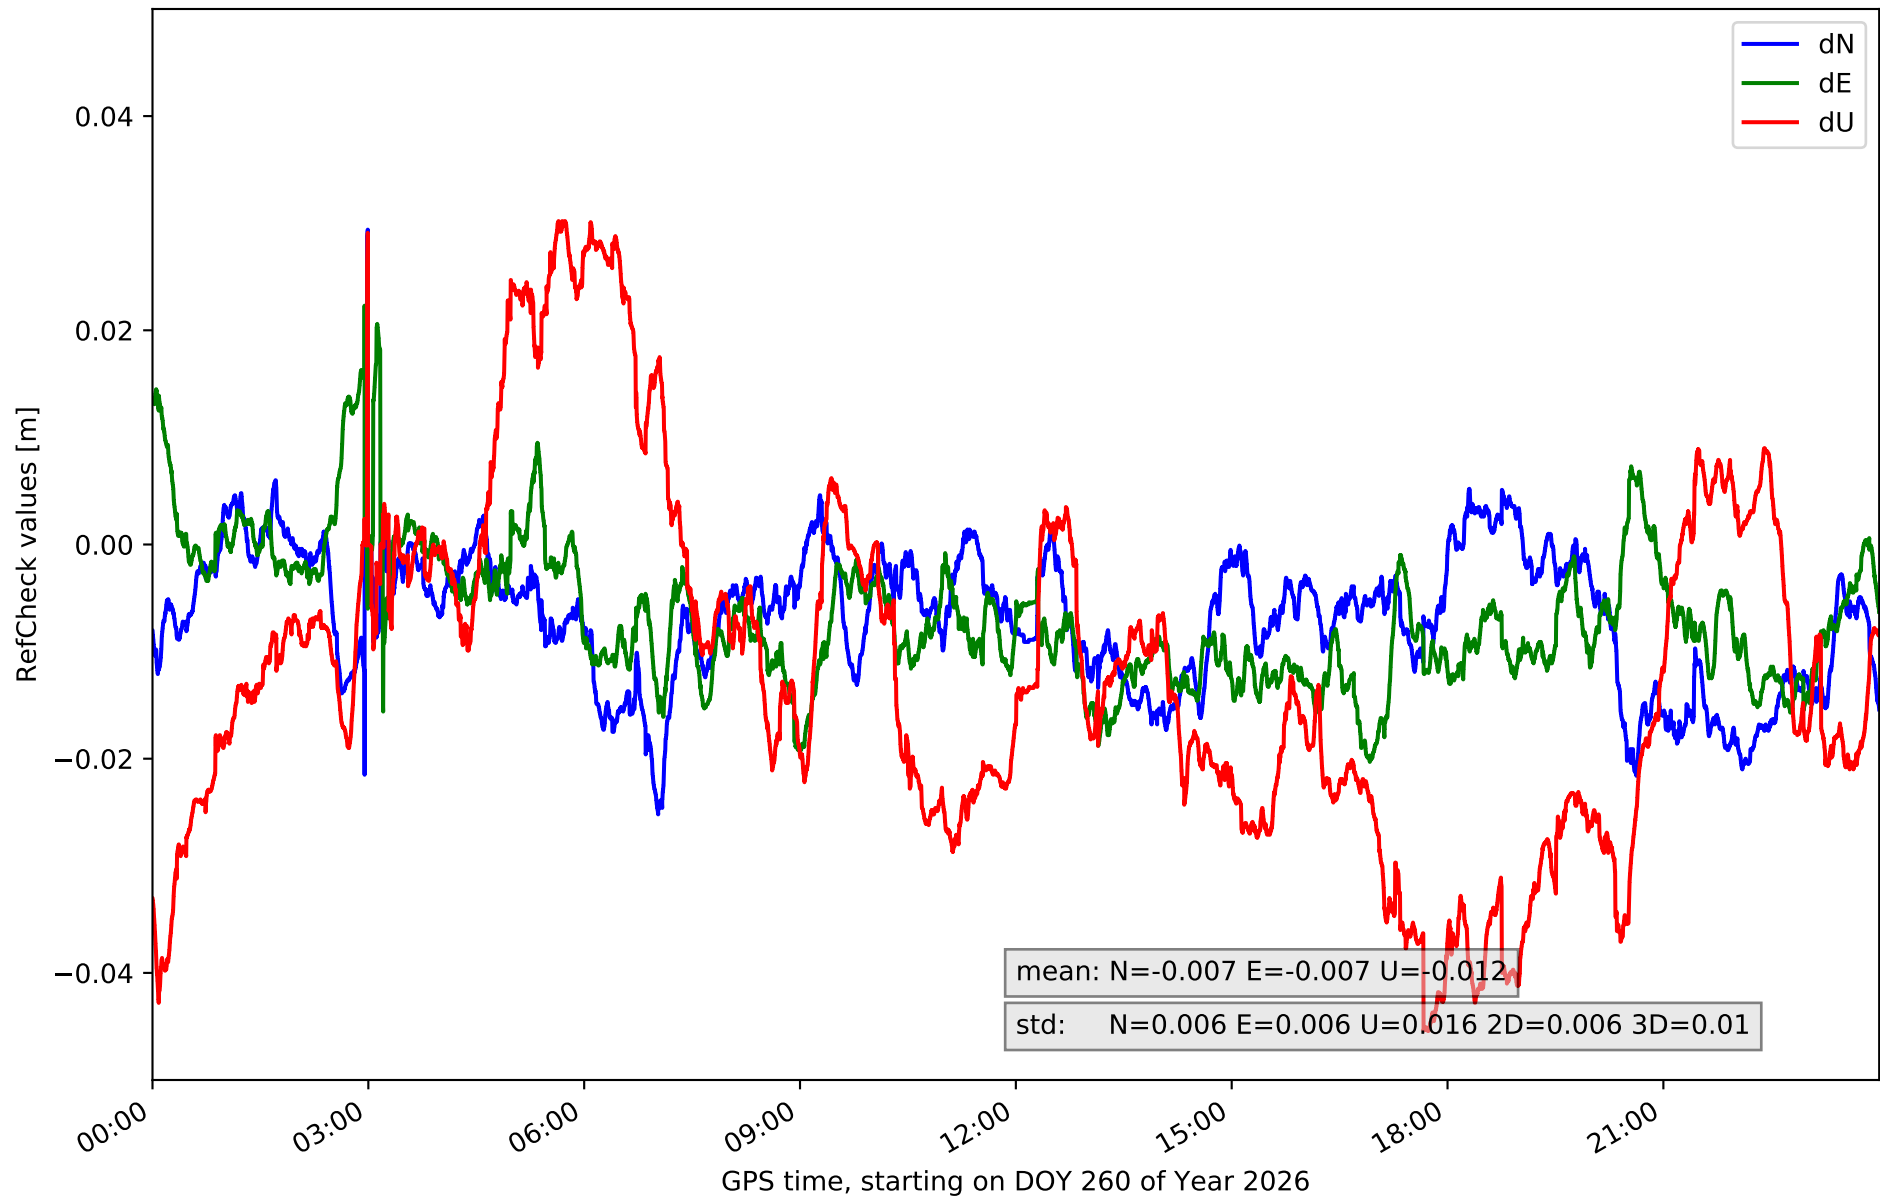


RefCheck for station GOME in network NT32

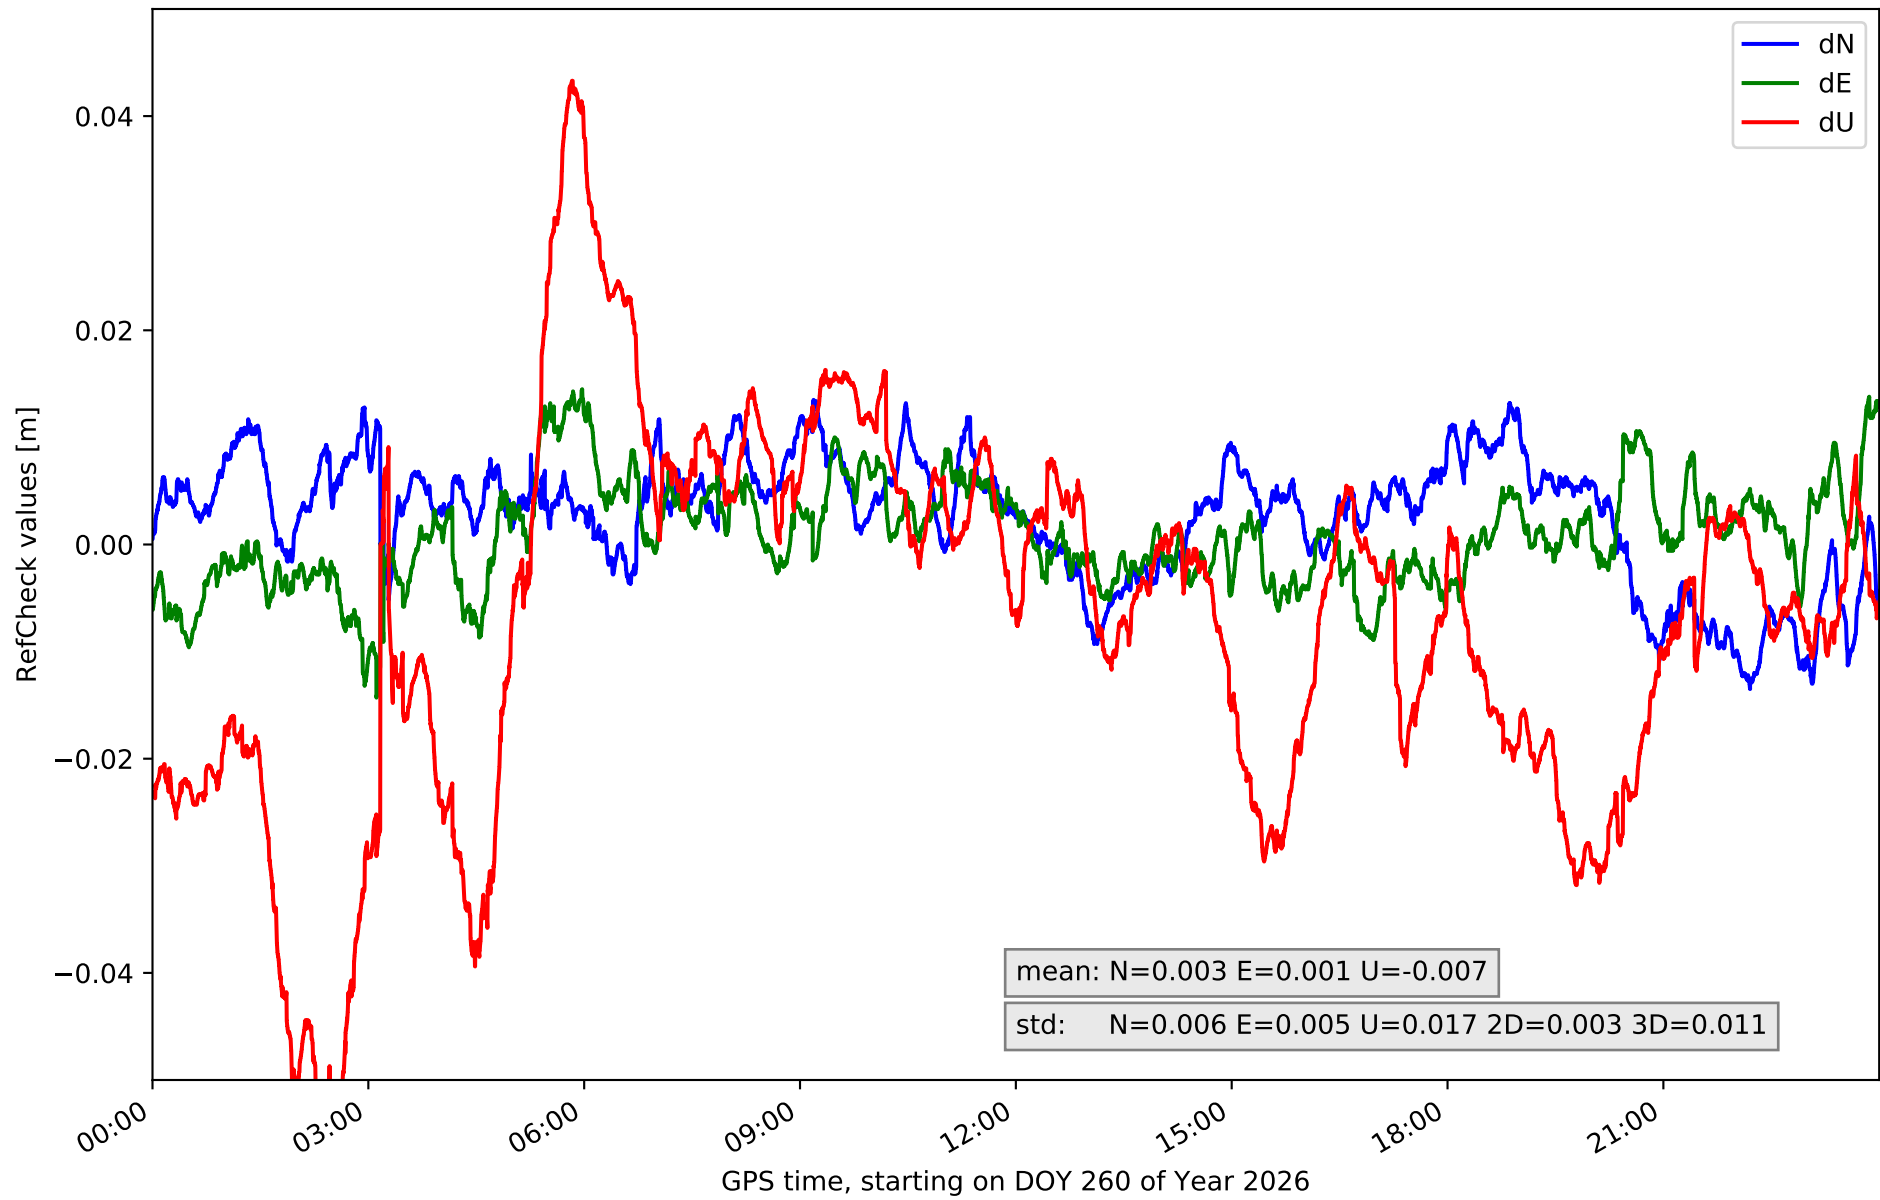


RefCheck for station IZAN in network NT32

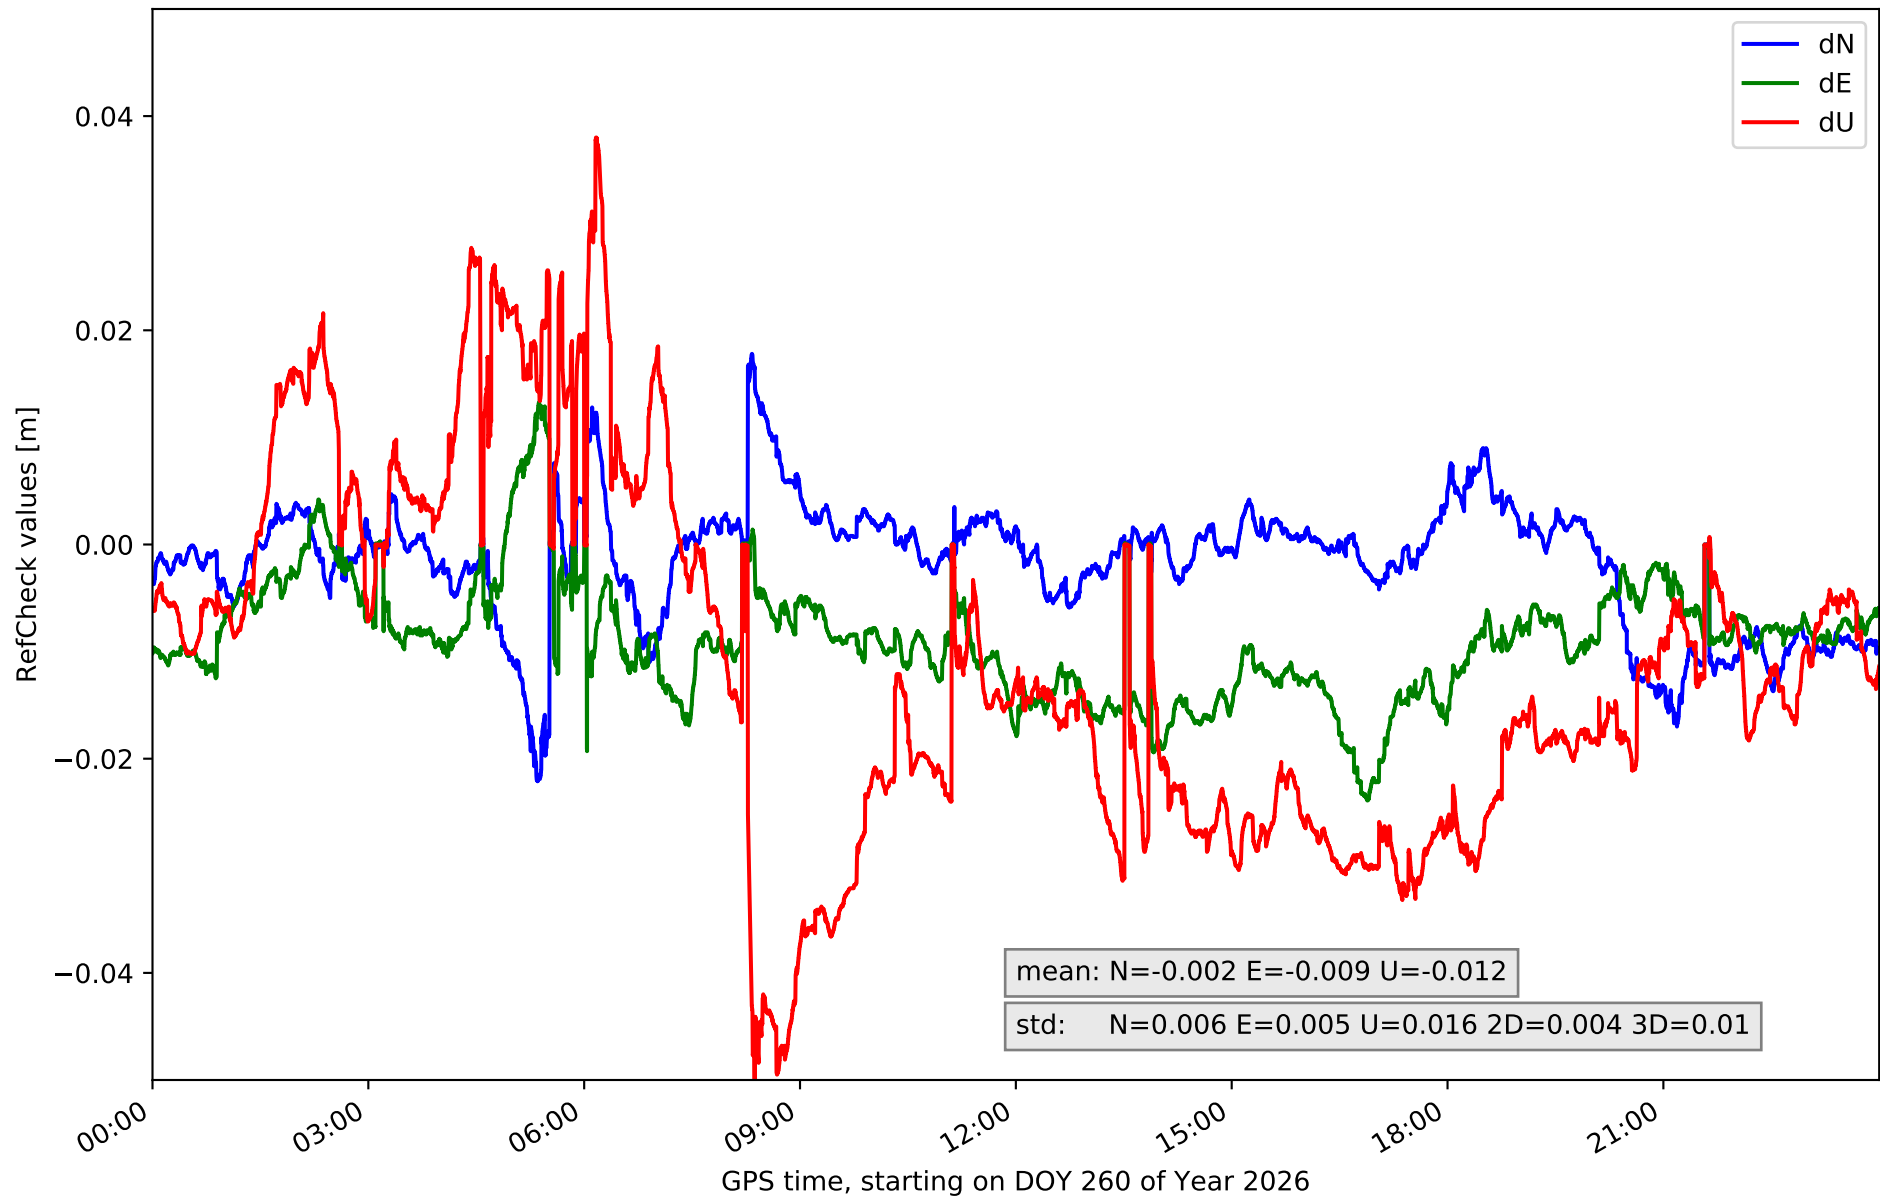


RefCheck for station LP01 in network NT32

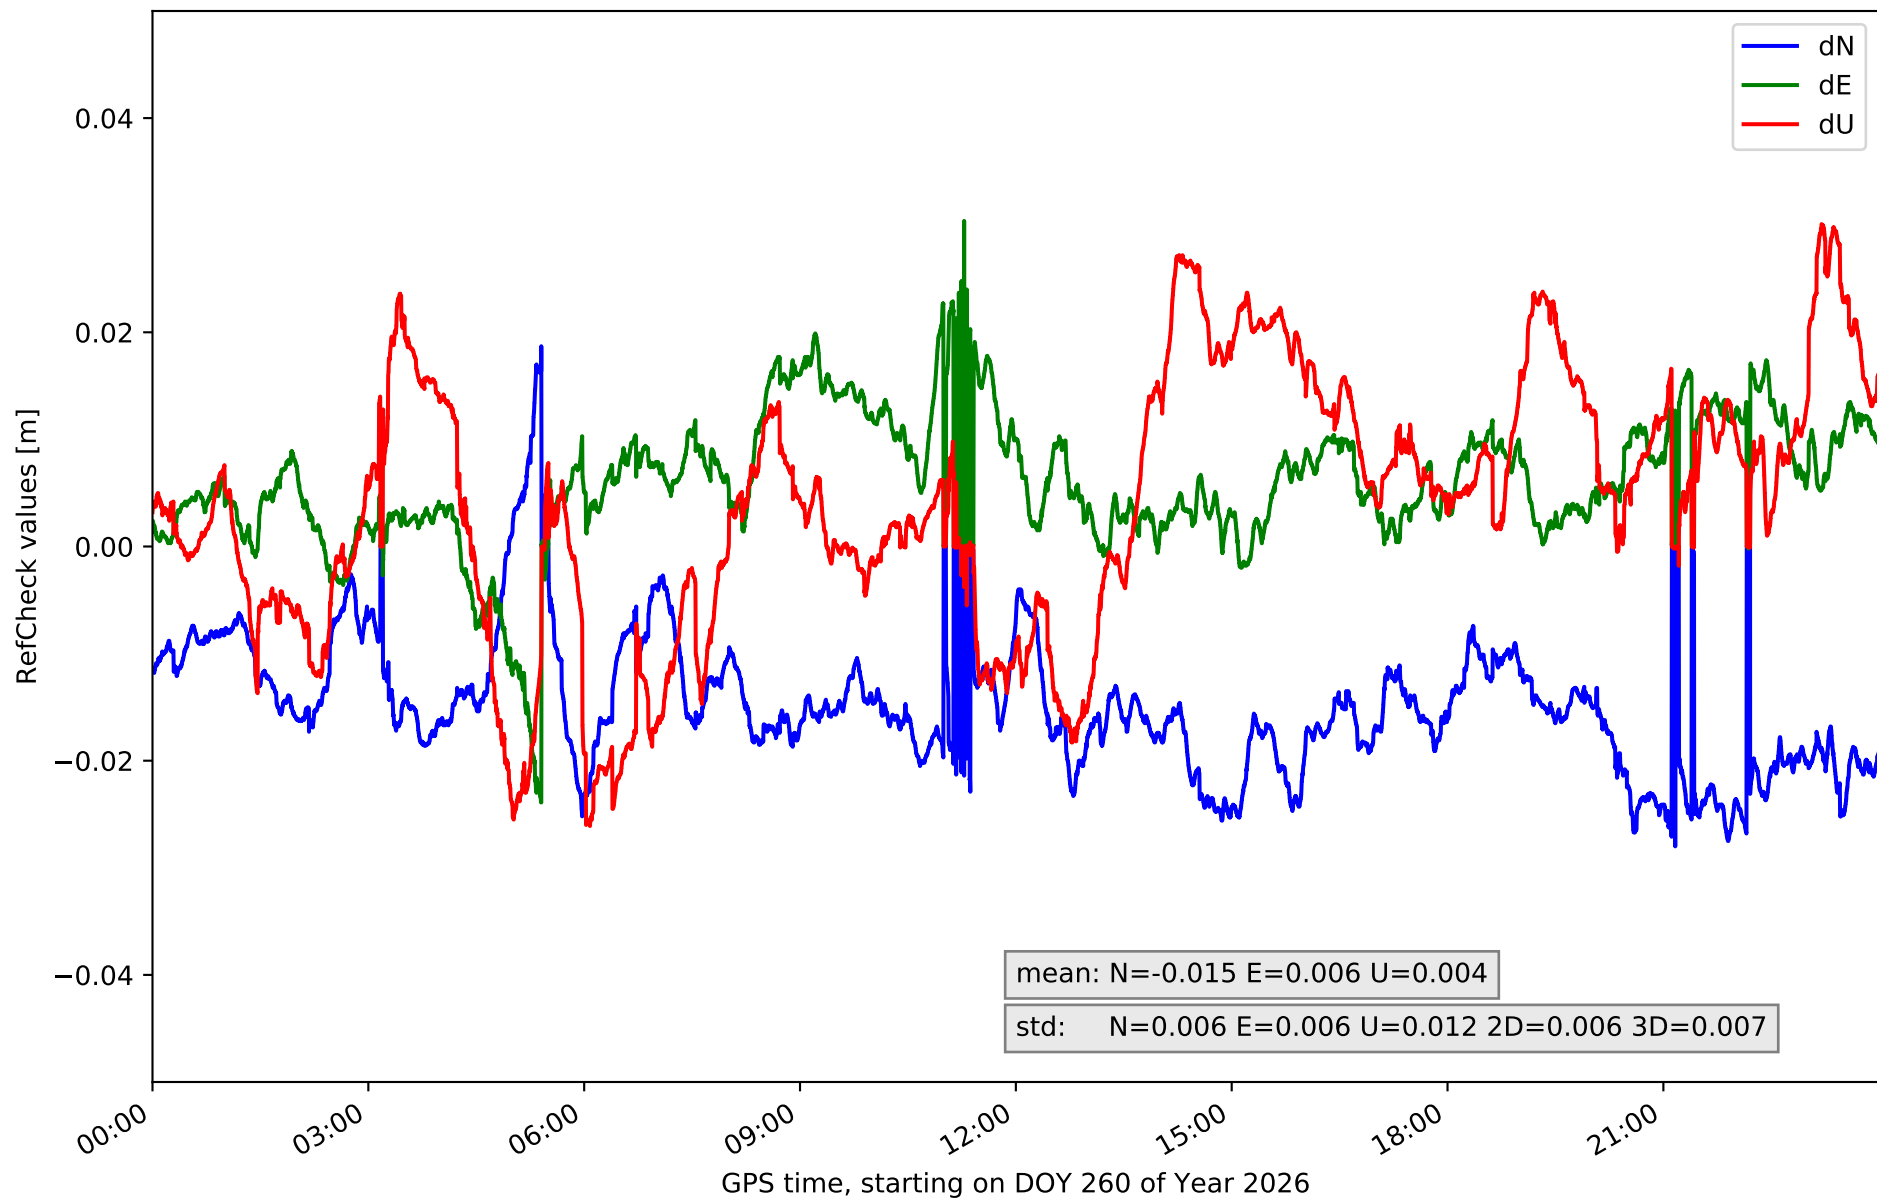


RefCheck for station LP03 in network NT32

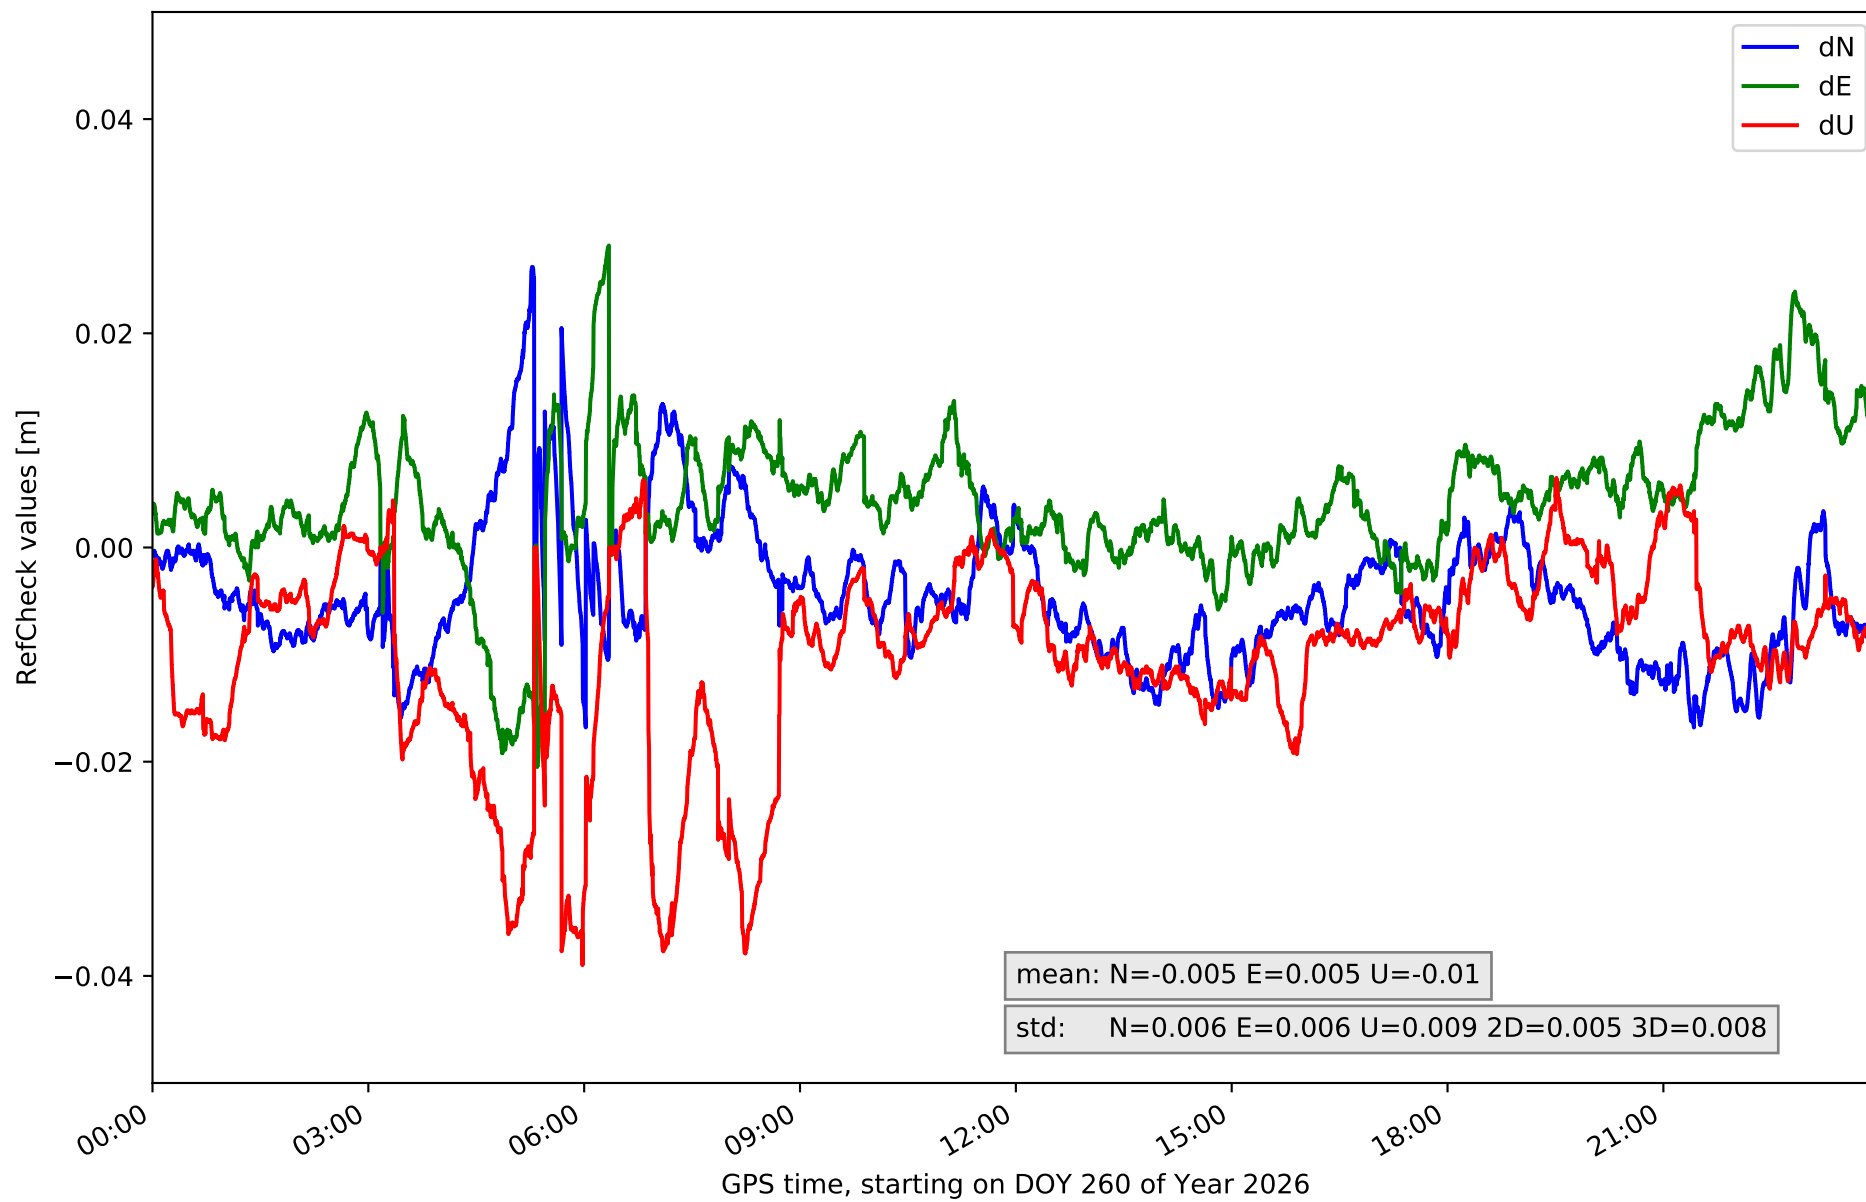


RefCheck for station LPAL in network NT32

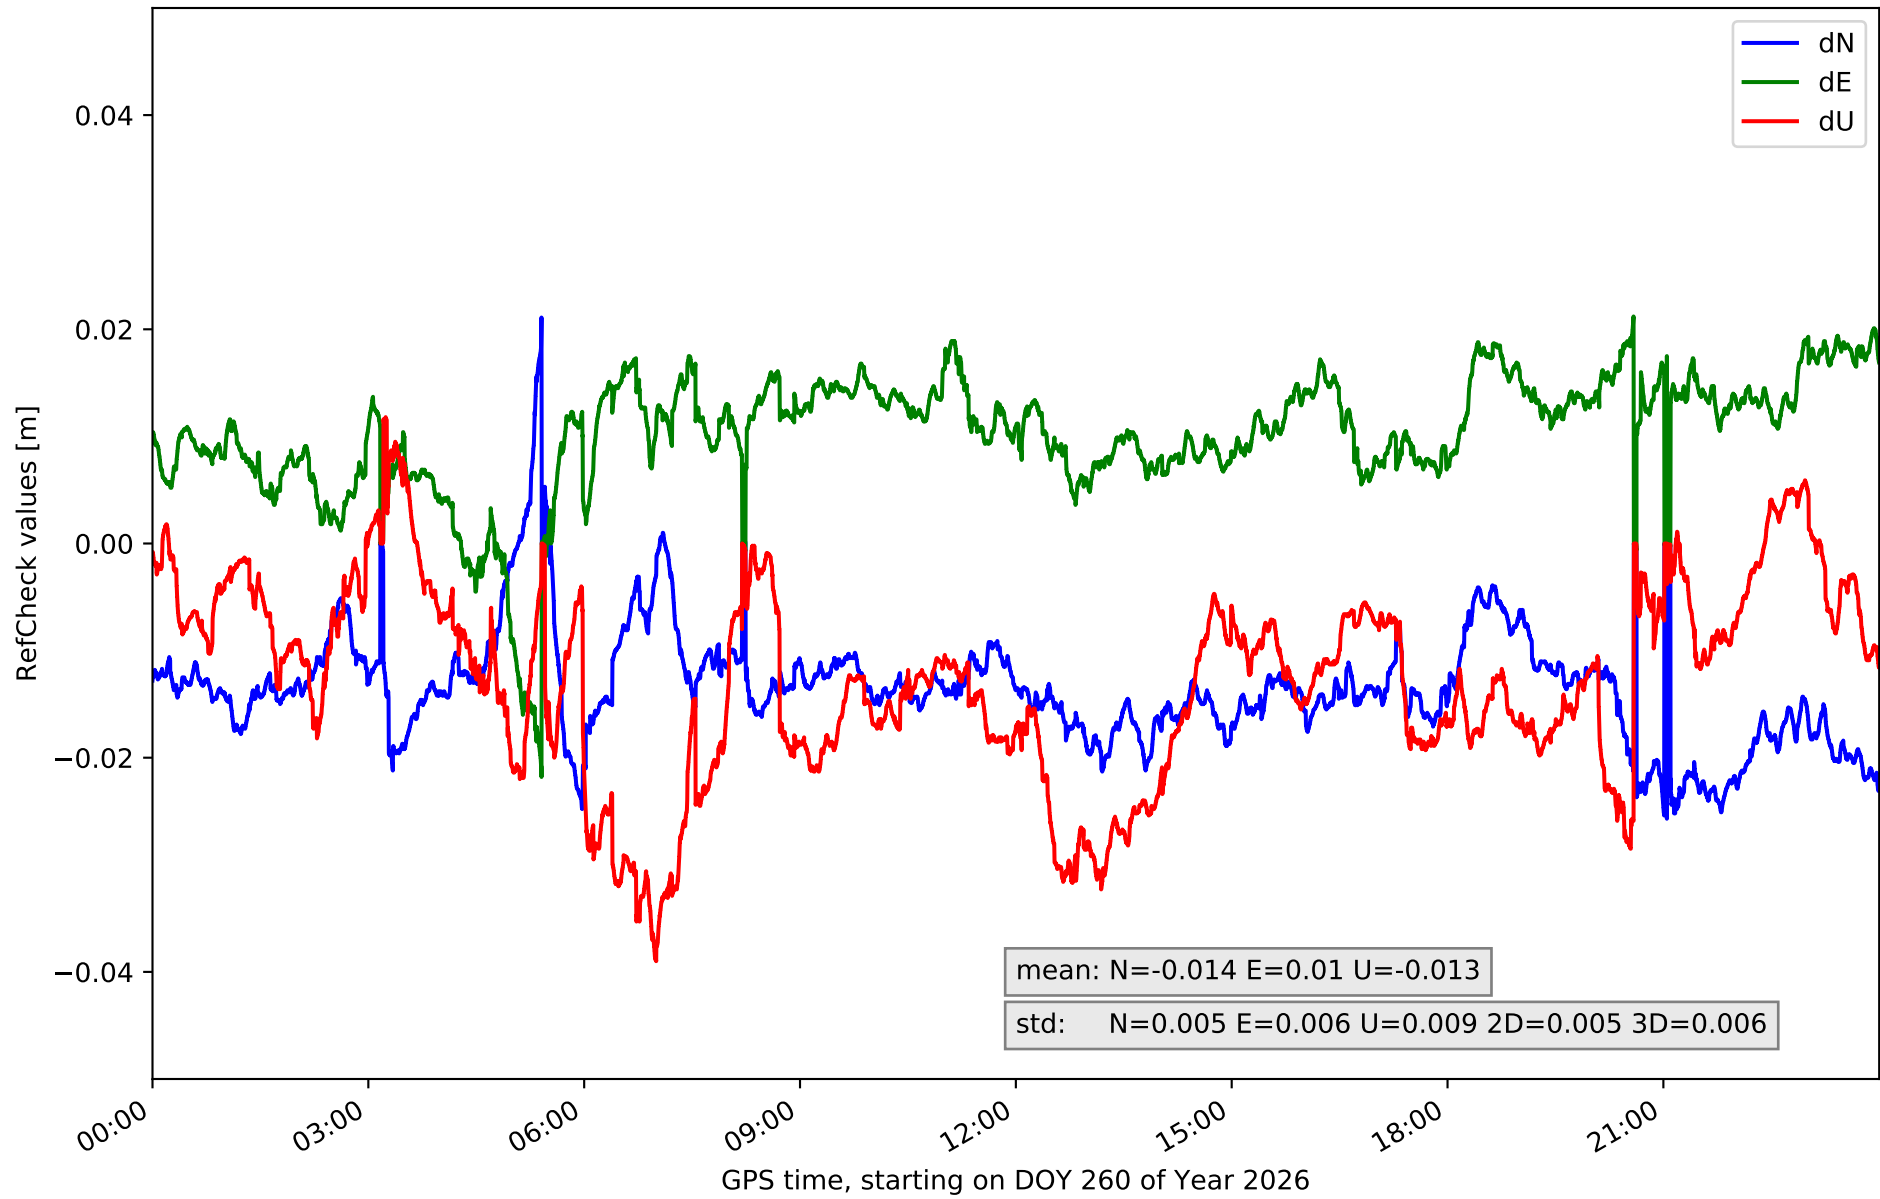


RefCheck for station LRES in network NT32

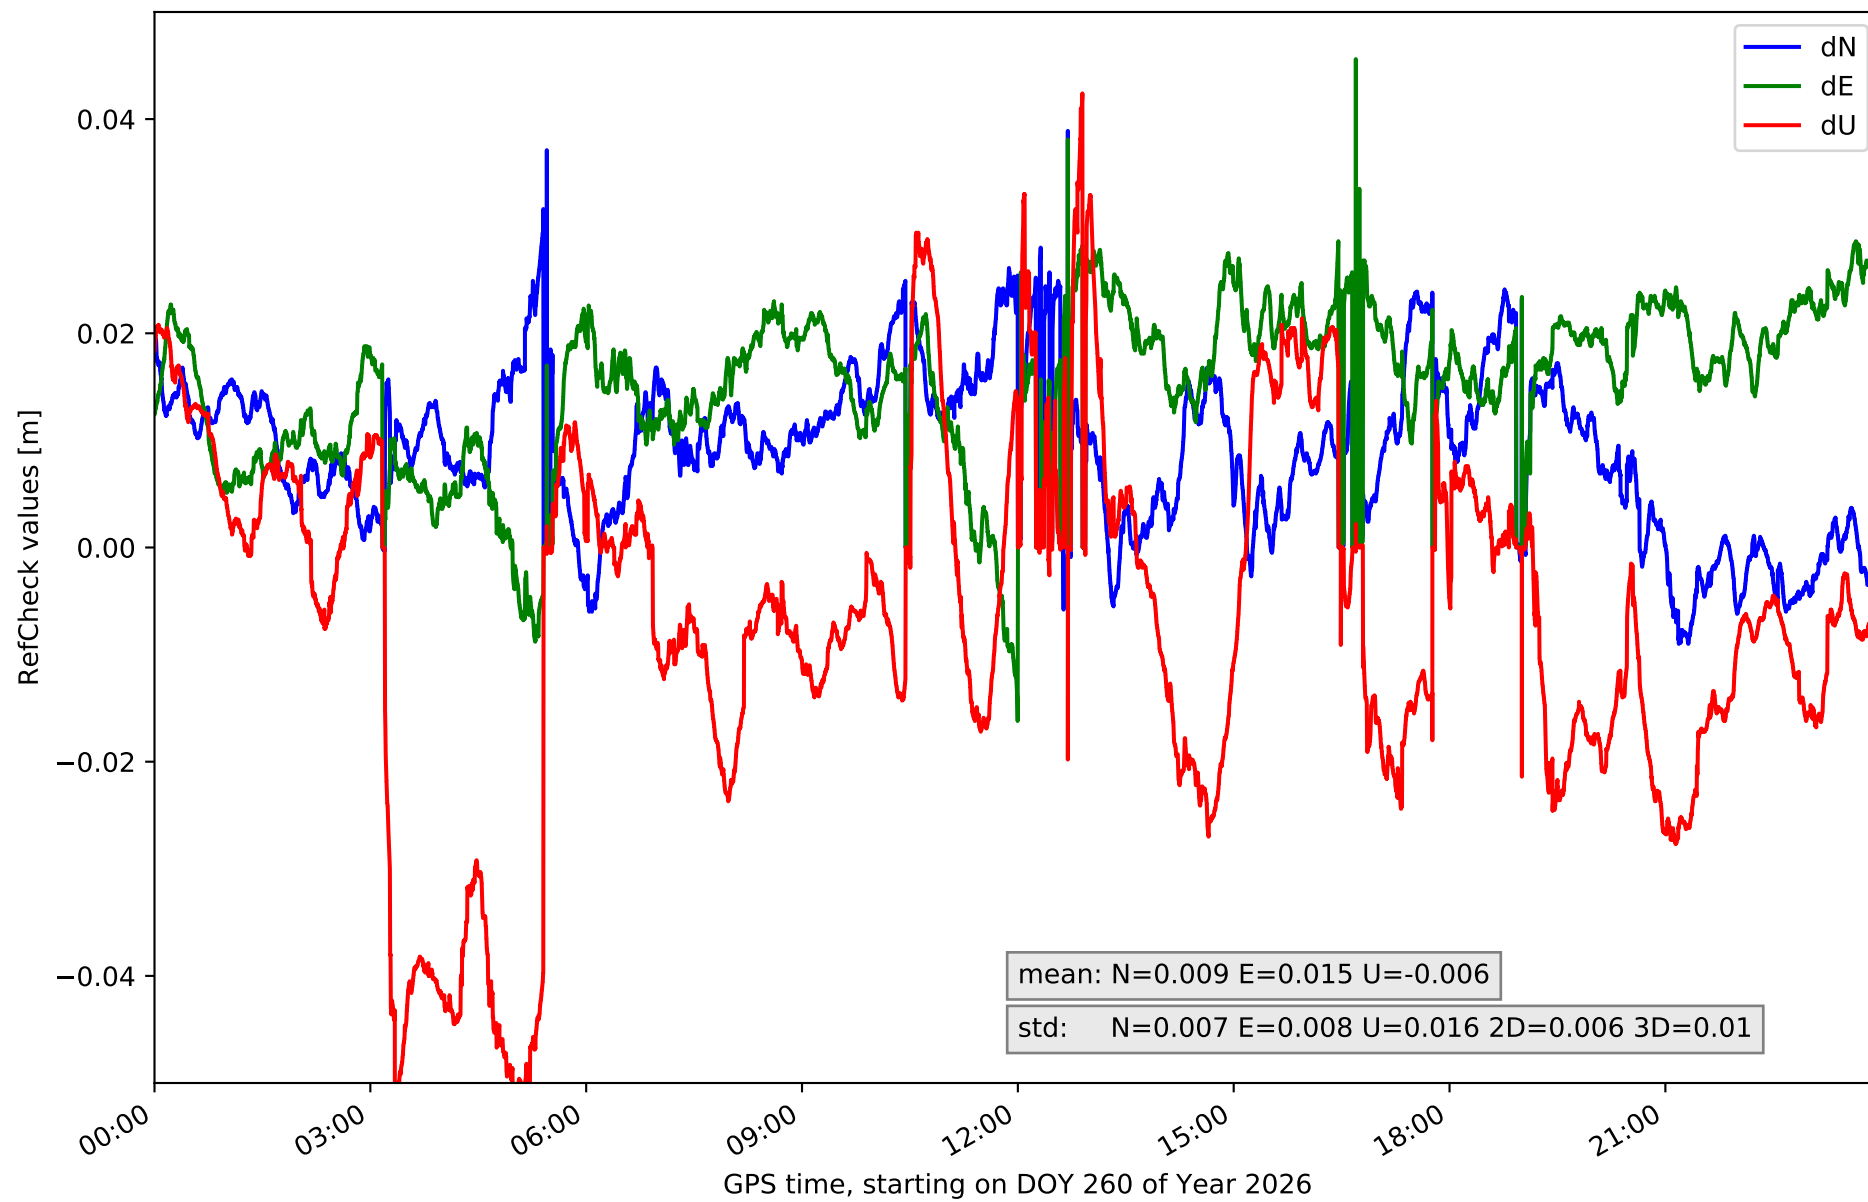


RefCheck for station TN01 in network NT32

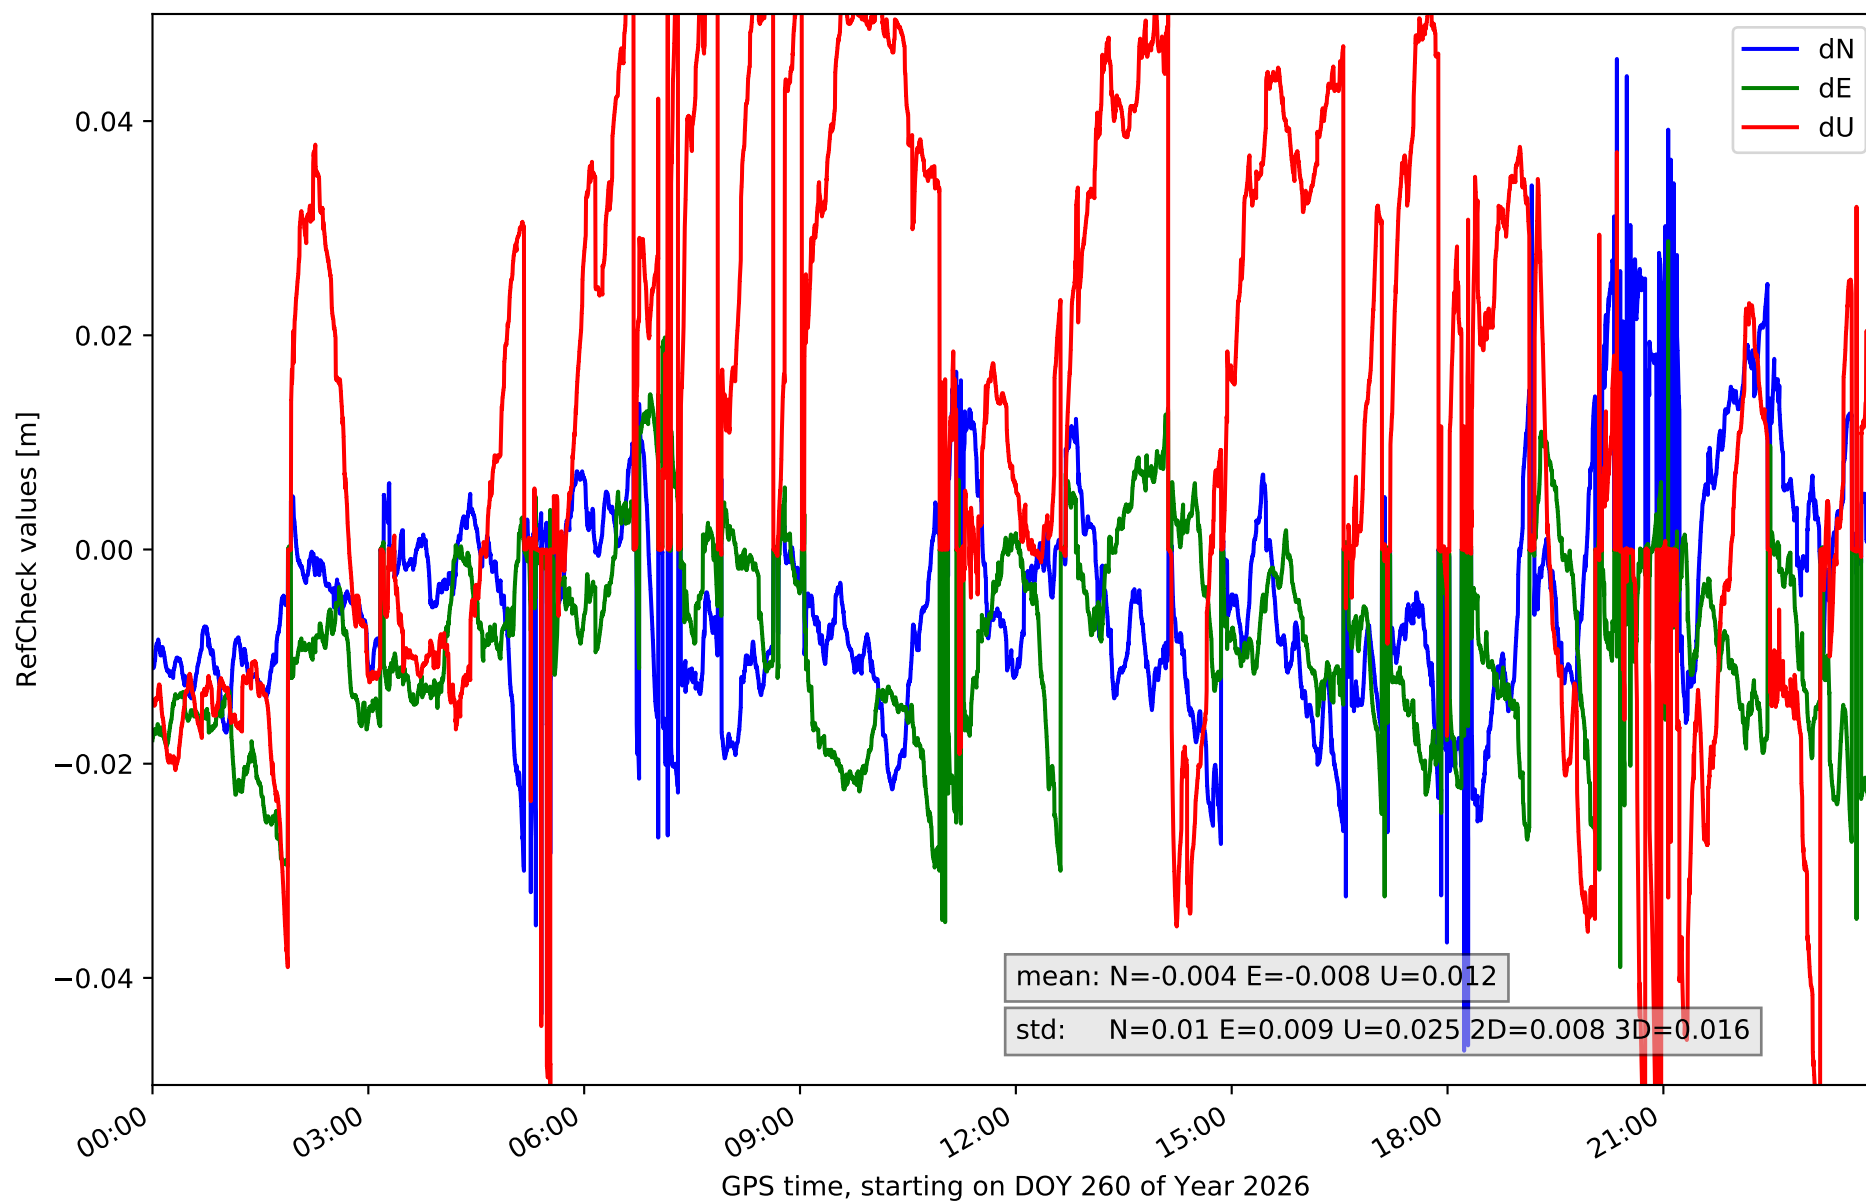


RefCheck for station TN02 in network NT32

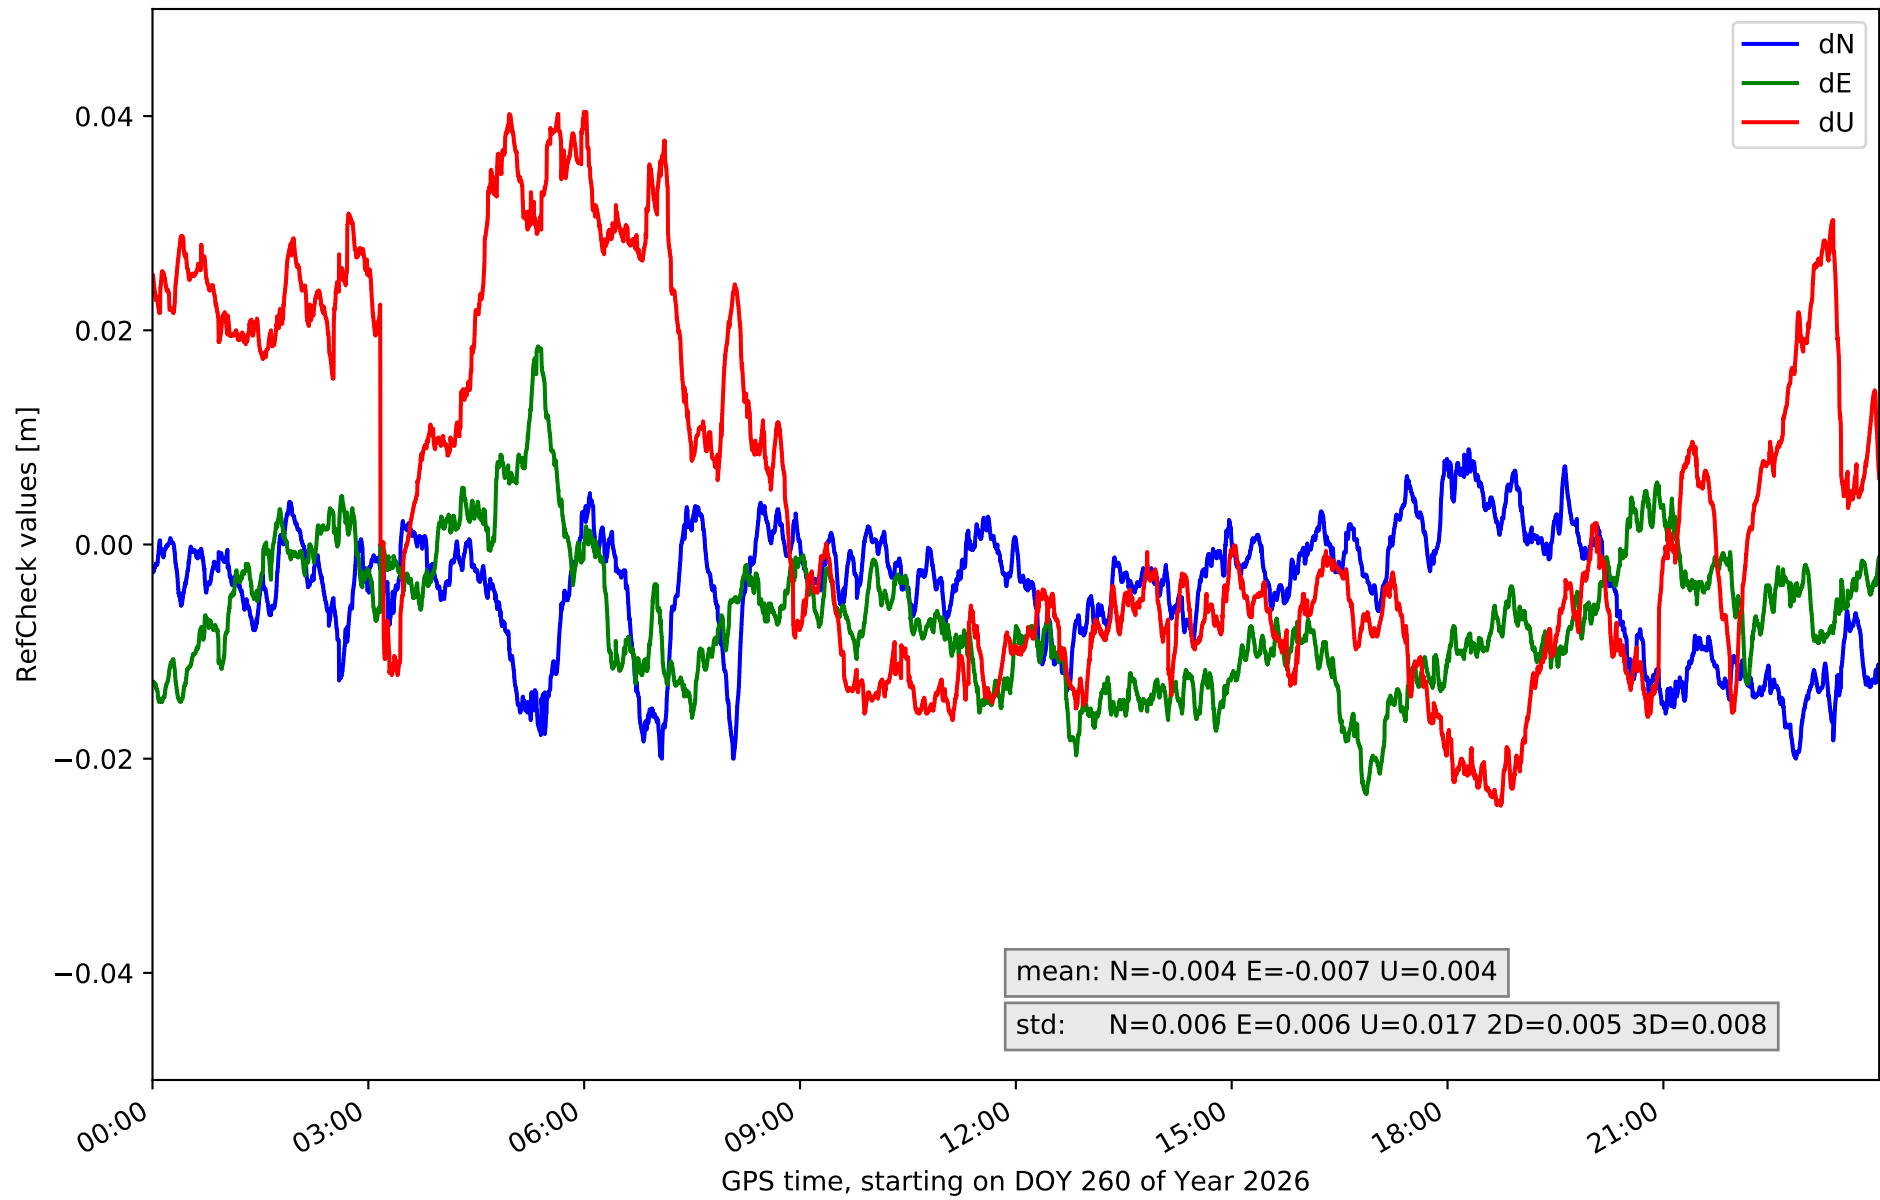


RefCheck for station TN03 in network NT32

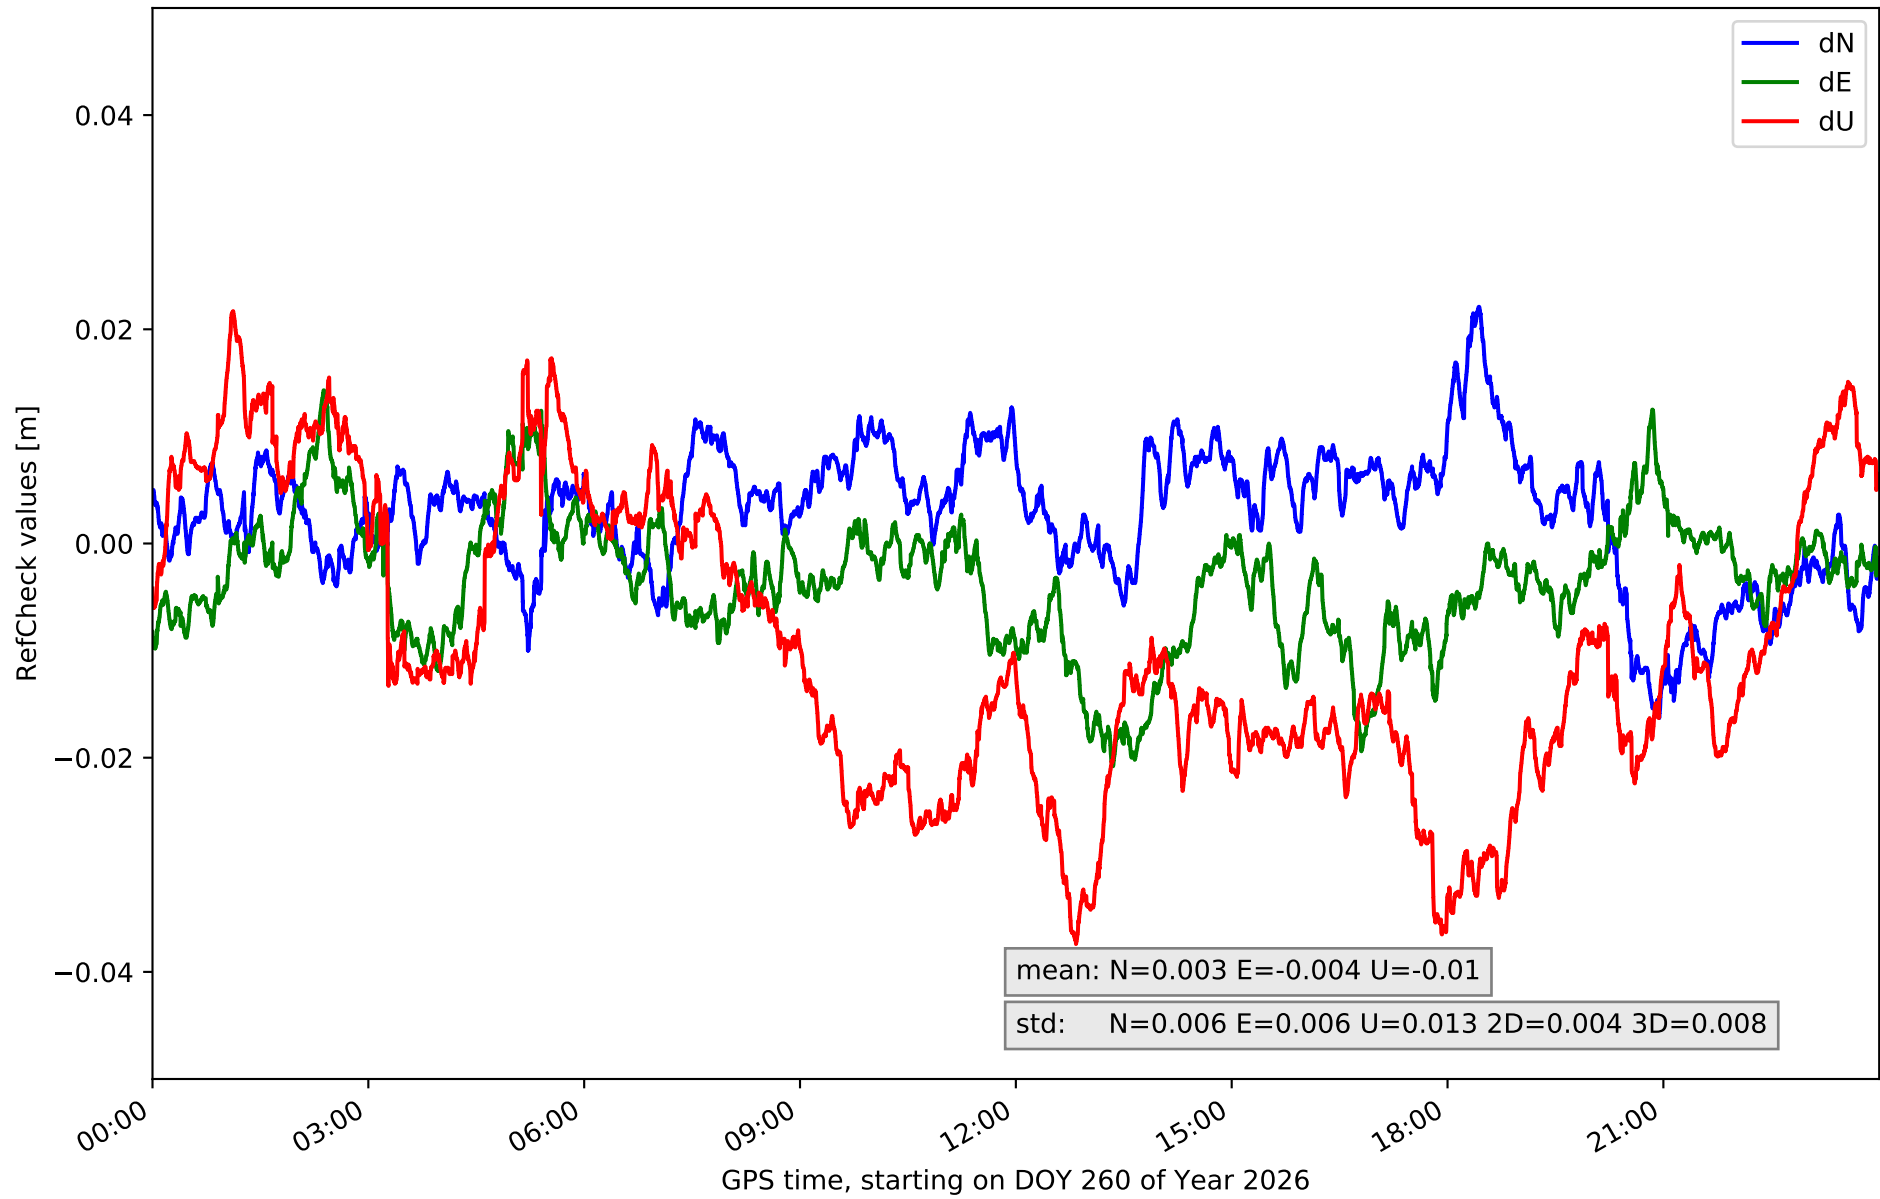


RefCheck for station TN06 in network NT32

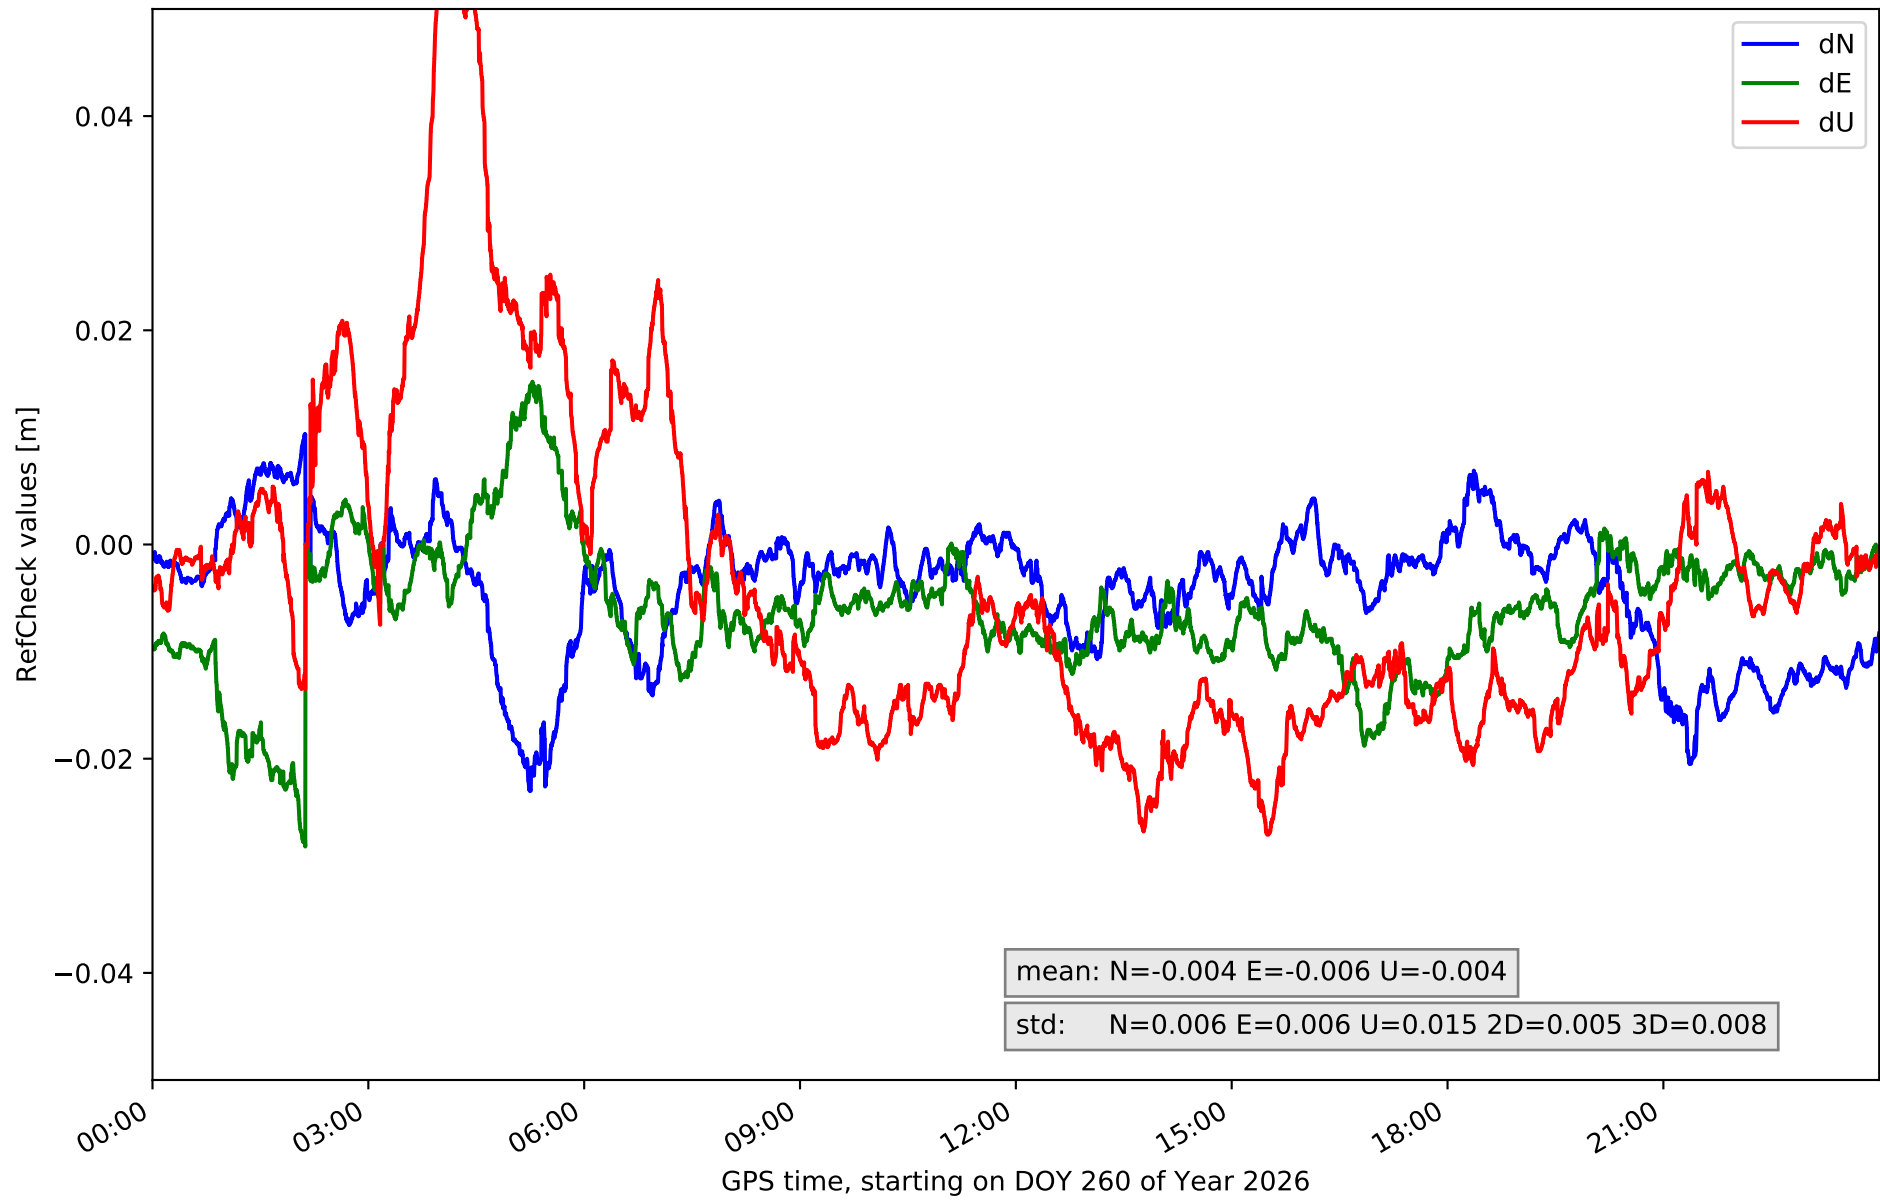

RefCheck for station TN09 in network NT32

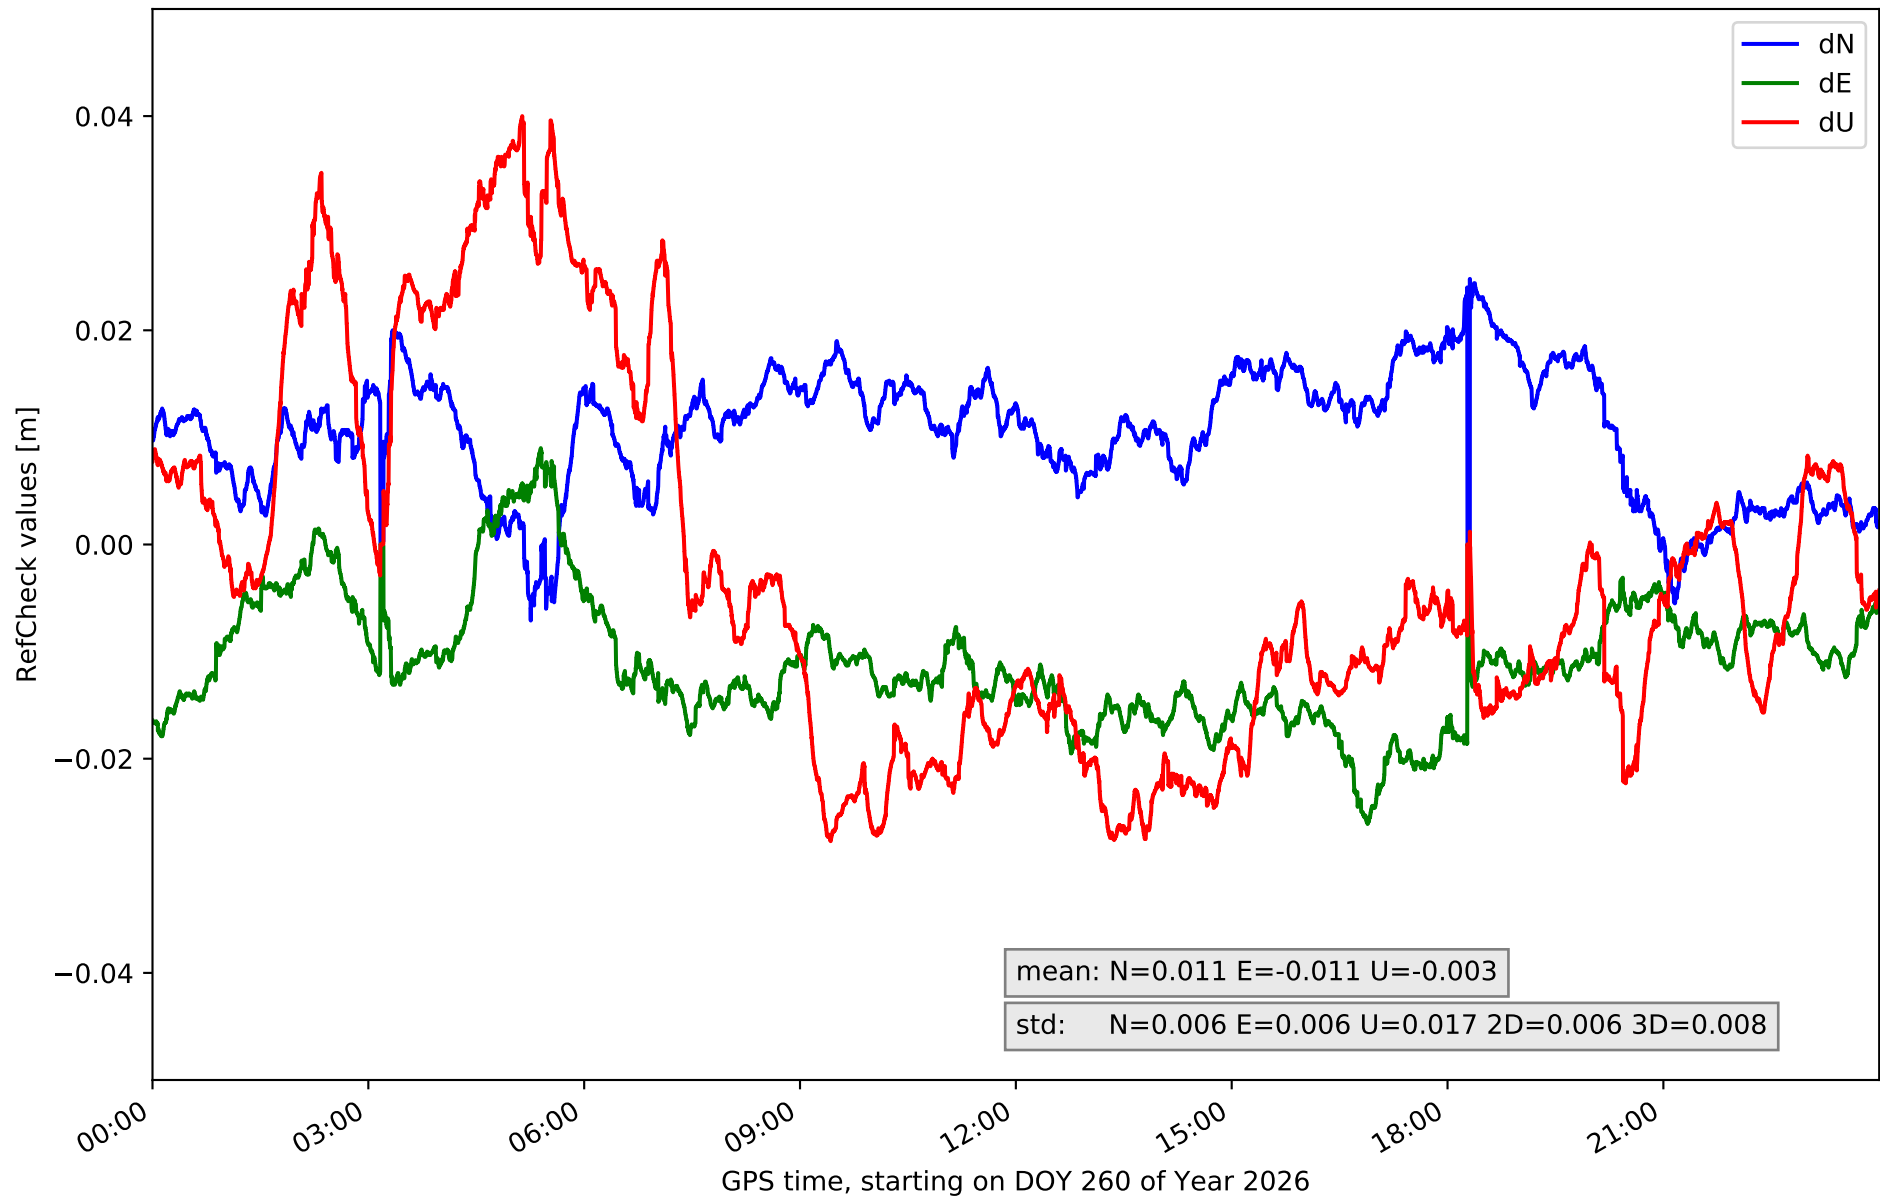

RefCheck for station TE11 in network NT32

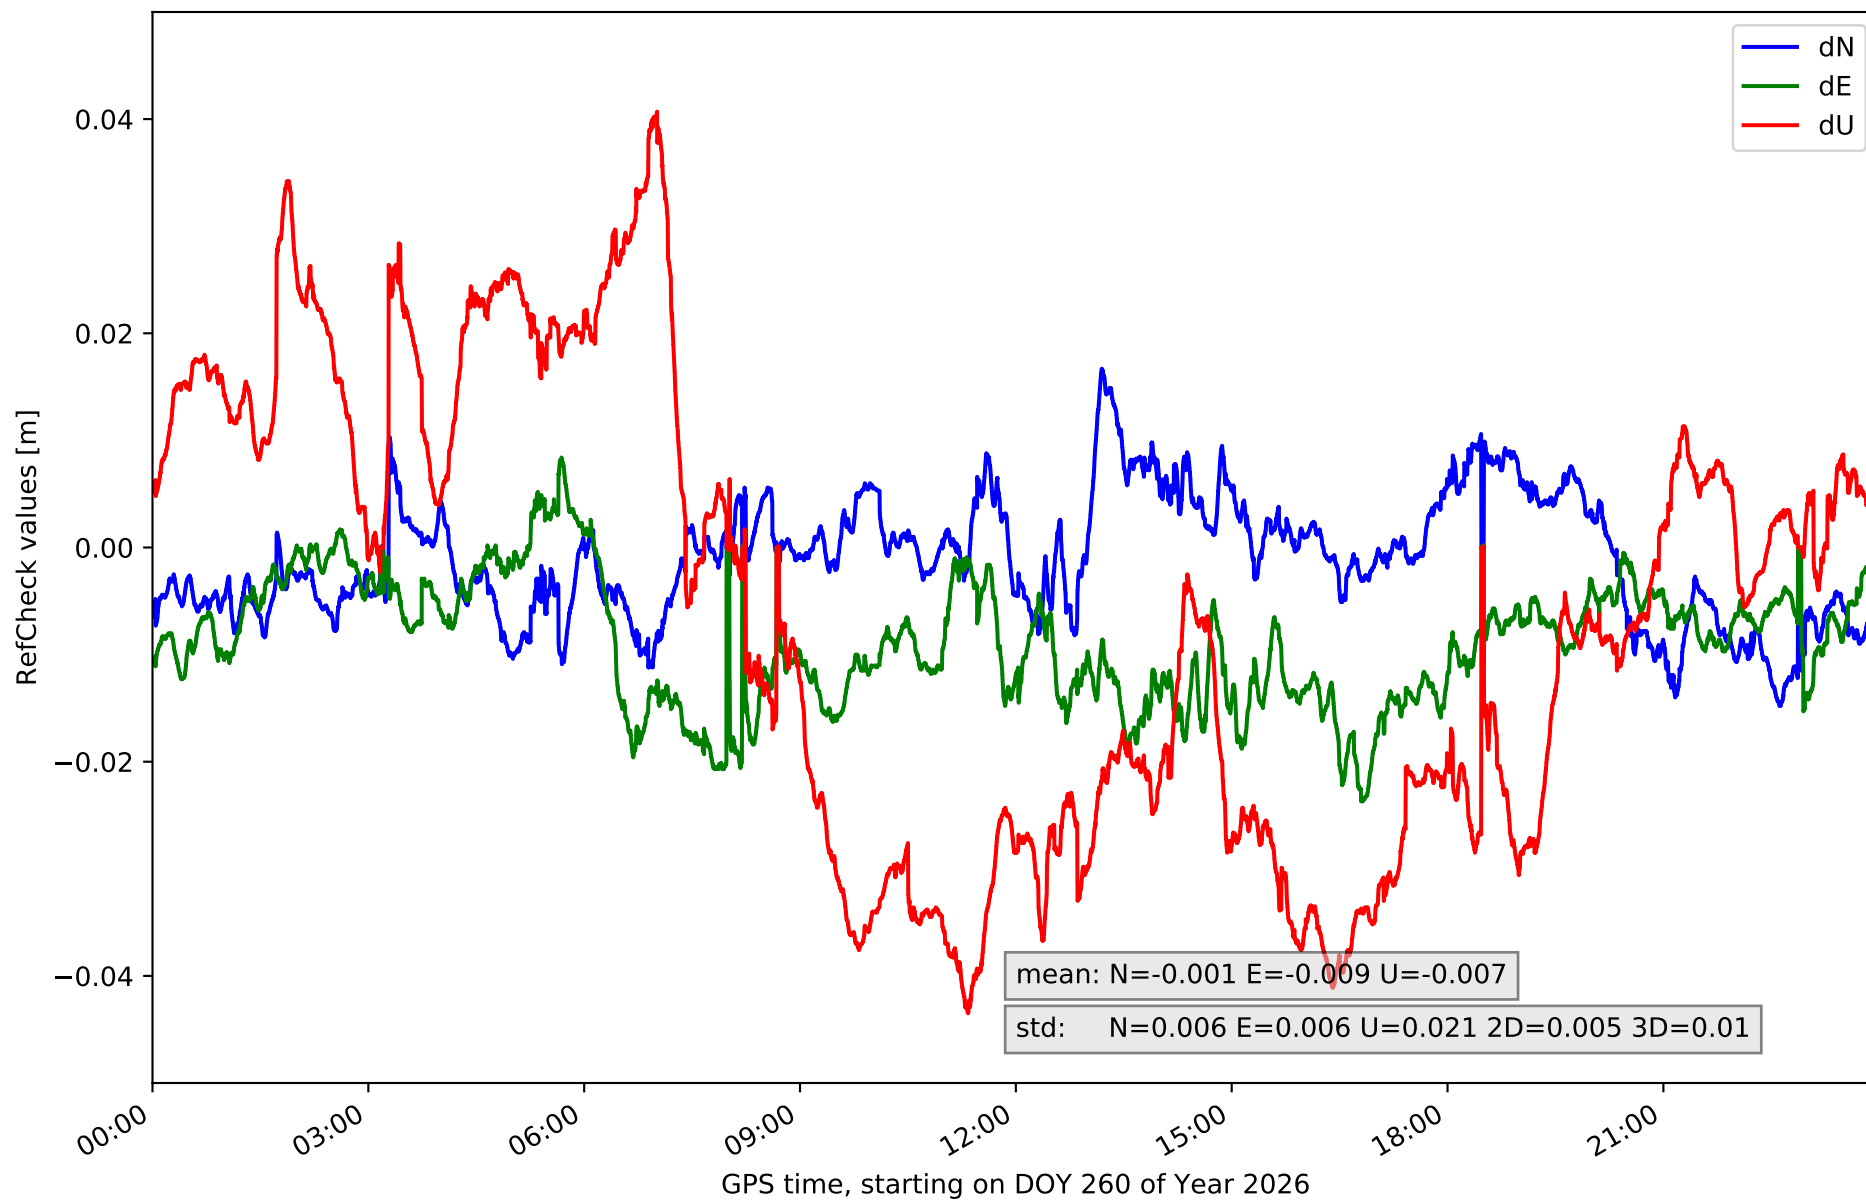

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.012	0.03	0.005	-0.006	0.03	0.005	-0.038	0.021	0.01	0.004	0.006	80007	98.5	51486	63.4
EH02	-0.006	0.026	0.006	-0.015	0.028	0.005	-0.06	0.042	0.014	0.005	0.008	80247	98.7	62787	77.3
GOM1	-0.025	0.029	0.006	-0.02	0.022	0.006	-0.045	0.03	0.016	0.006	0.01	47846	58.9	51300	63.1
GOME	-0.013	0.013	0.006	-0.014	0.015	0.005	-0.055	0.043	0.017	0.003	0.011	17224	21.2	27050	33.3
IZAN	-0.022	0.018	0.006	-0.024	0.013	0.005	-0.051	0.038	0.016	0.004	0.01	51410	63.3	40718	50.1
LP01	-0.028	0.019	0.006	-0.024	0.03	0.006	-0.026	0.03	0.012	0.006	0.007	70957	87.3	44920	55.3
LP03	-0.017	0.026	0.006	-0.021	0.028	0.006	-0.039	0.006	0.009	0.005	0.008	32687	40.2	16542	20.4
LPAL	-0.026	0.021	0.005	-0.022	0.021	0.006	-0.039	0.012	0.009	0.005	0.006	77552	95.4	58426	71.9
LRES	-0.009	0.039	0.007	-0.016	0.046	0.008	-0.056	0.042	0.016	0.006	0.01	77030	94.8	60102	74.0
TN01	-0.047	0.046	0.01	-0.039	0.029	0.009	-0.077	0.068	0.025	0.008	0.016	53658	66.0	55456	68.2
TN02	-0.02	0.009	0.006	-0.023	0.018	0.006	-0.024	0.04	0.017	0.005	0.008	44904	55.3	29967	36.9
TN03	-0.016	0.022	0.006	-0.021	0.014	0.006	-0.037	0.022	0.013	0.004	0.008	27951	34.4	28474	35.0
TN06	-0.023	0.01	0.006	-0.028	0.015	0.006	-0.027	0.058	0.015	0.005	0.008	36569	45.0	22224	27.3
TN09	-0.007	0.025	0.006	-0.026	0.009	0.006	-0.028	0.04	0.017	0.006	0.008	64270	79.1	57027	70.2
TE11	-0.015	0.017	0.006	-0.024	0.008	0.006	-0.043	0.041	0.021	0.005	0.01	47013	57.9	46747	57.5
Mean	-0.019	0.023	0.006	-0.022	0.022	0.006	-0.043	0.036	0.015	0.005	0.009	53955.0	66.4	43548.4	53.6
Min/Max	-0.047	0.046	0.01	-0.039	0.046	0.009	-0.077	0.068	0.025	0.008	0.016	80247	98.7	62787	77.3

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	90.1	92.6	84.1	92.6	88.3
considering satellites with dual-frequency fixed	84.2	87.4	73.8	86.9	83.2
considering all signals separately	84.8	87.5	73.8	87.1	83.1