

summary for network NT31

timeperiod chosen: from 2026-02-03-00:00:00 until 2026-02-03-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.1 seconds


average fixing percentage with threshold set to 0.3: 92.5 percent

stations available: 6 of 7


station information:

station FUER:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 76.887
station LALA:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 62.306
station LZ02:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 58.039
station LZ03:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 314.762
station MASP:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 198.846
station ULP2:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE ALLOY	height: 375.129


Processing rate in network NT31

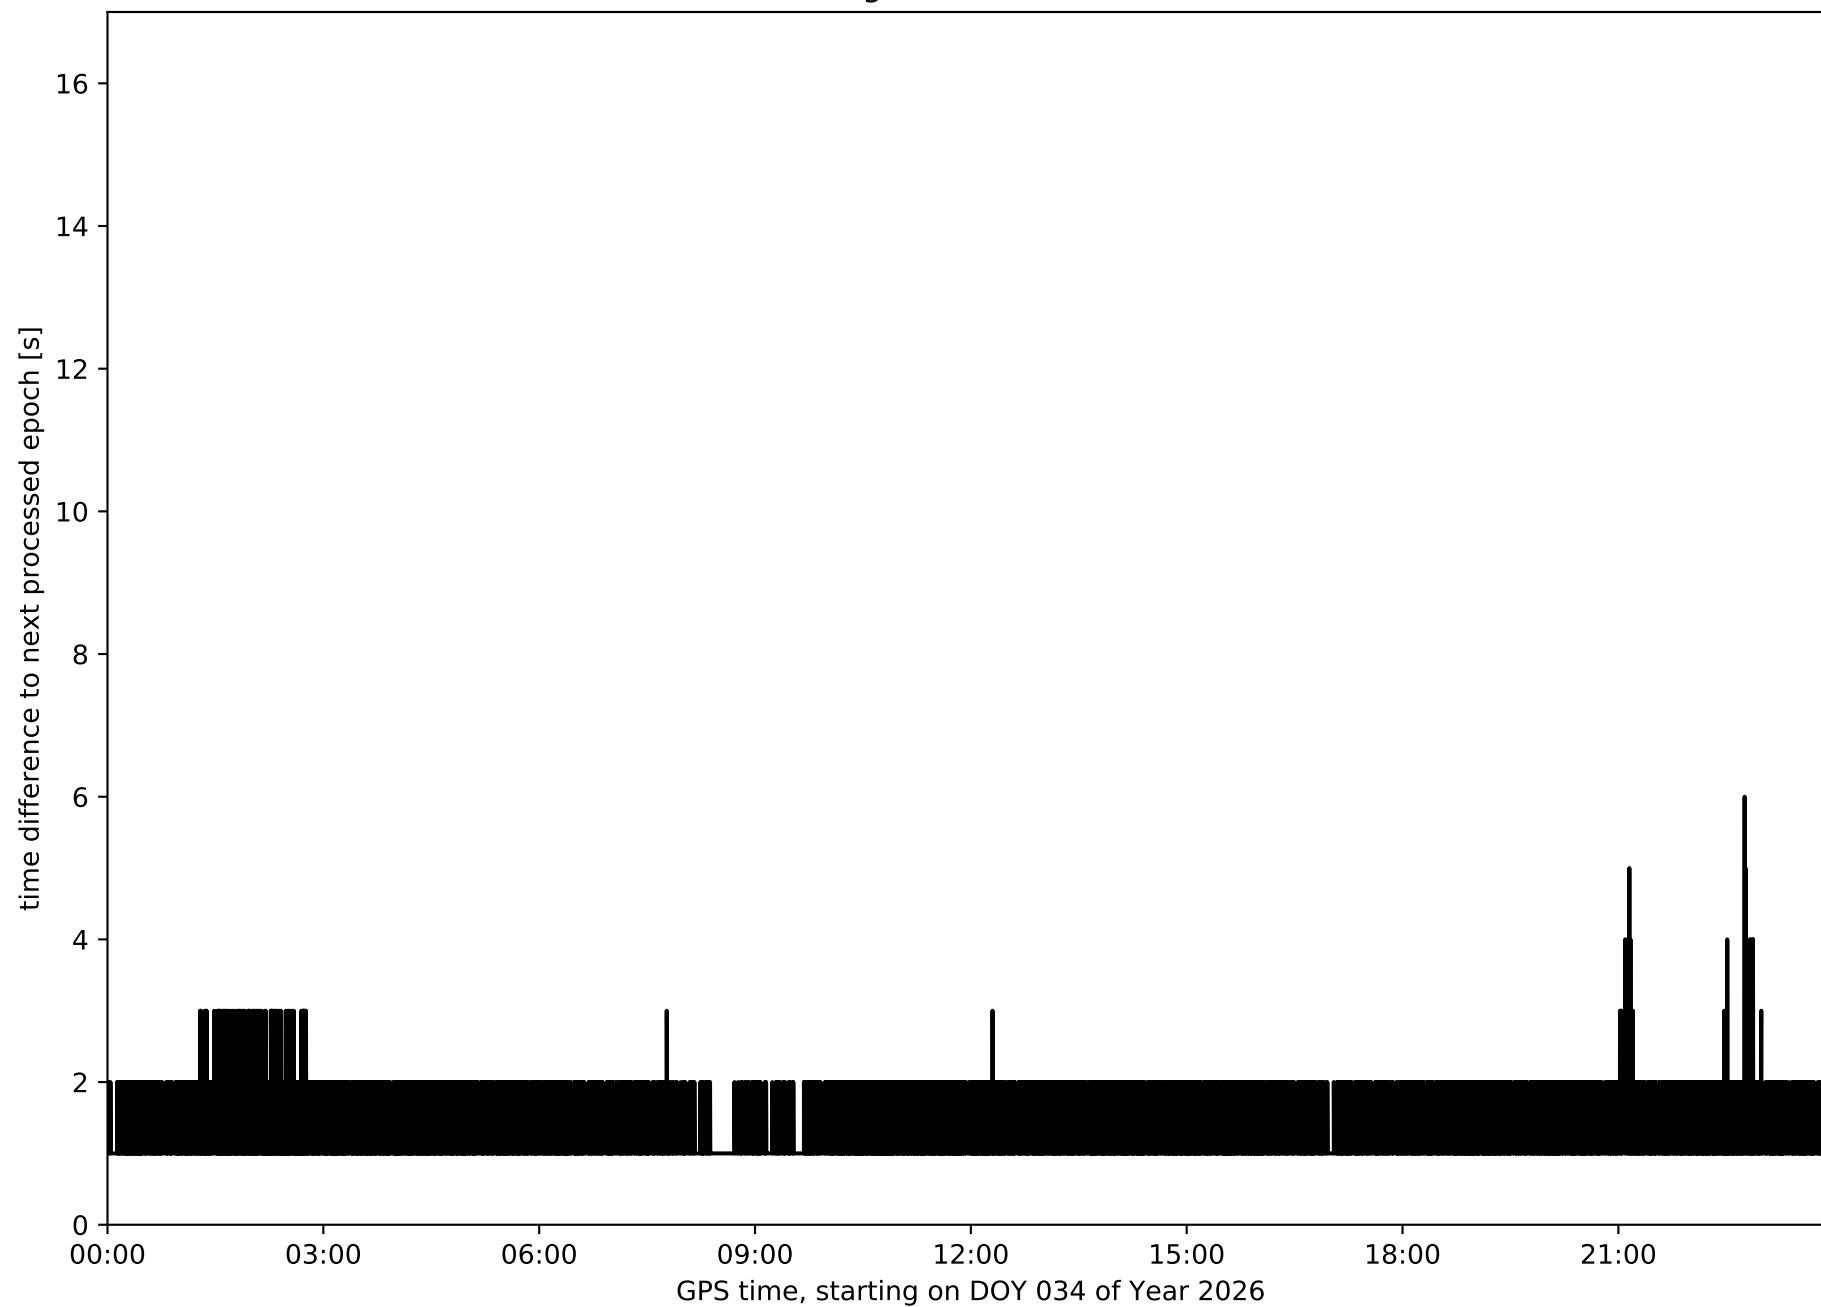


Histogram of the processing rate in network NT31 (durations larger 15 seconds neglected)

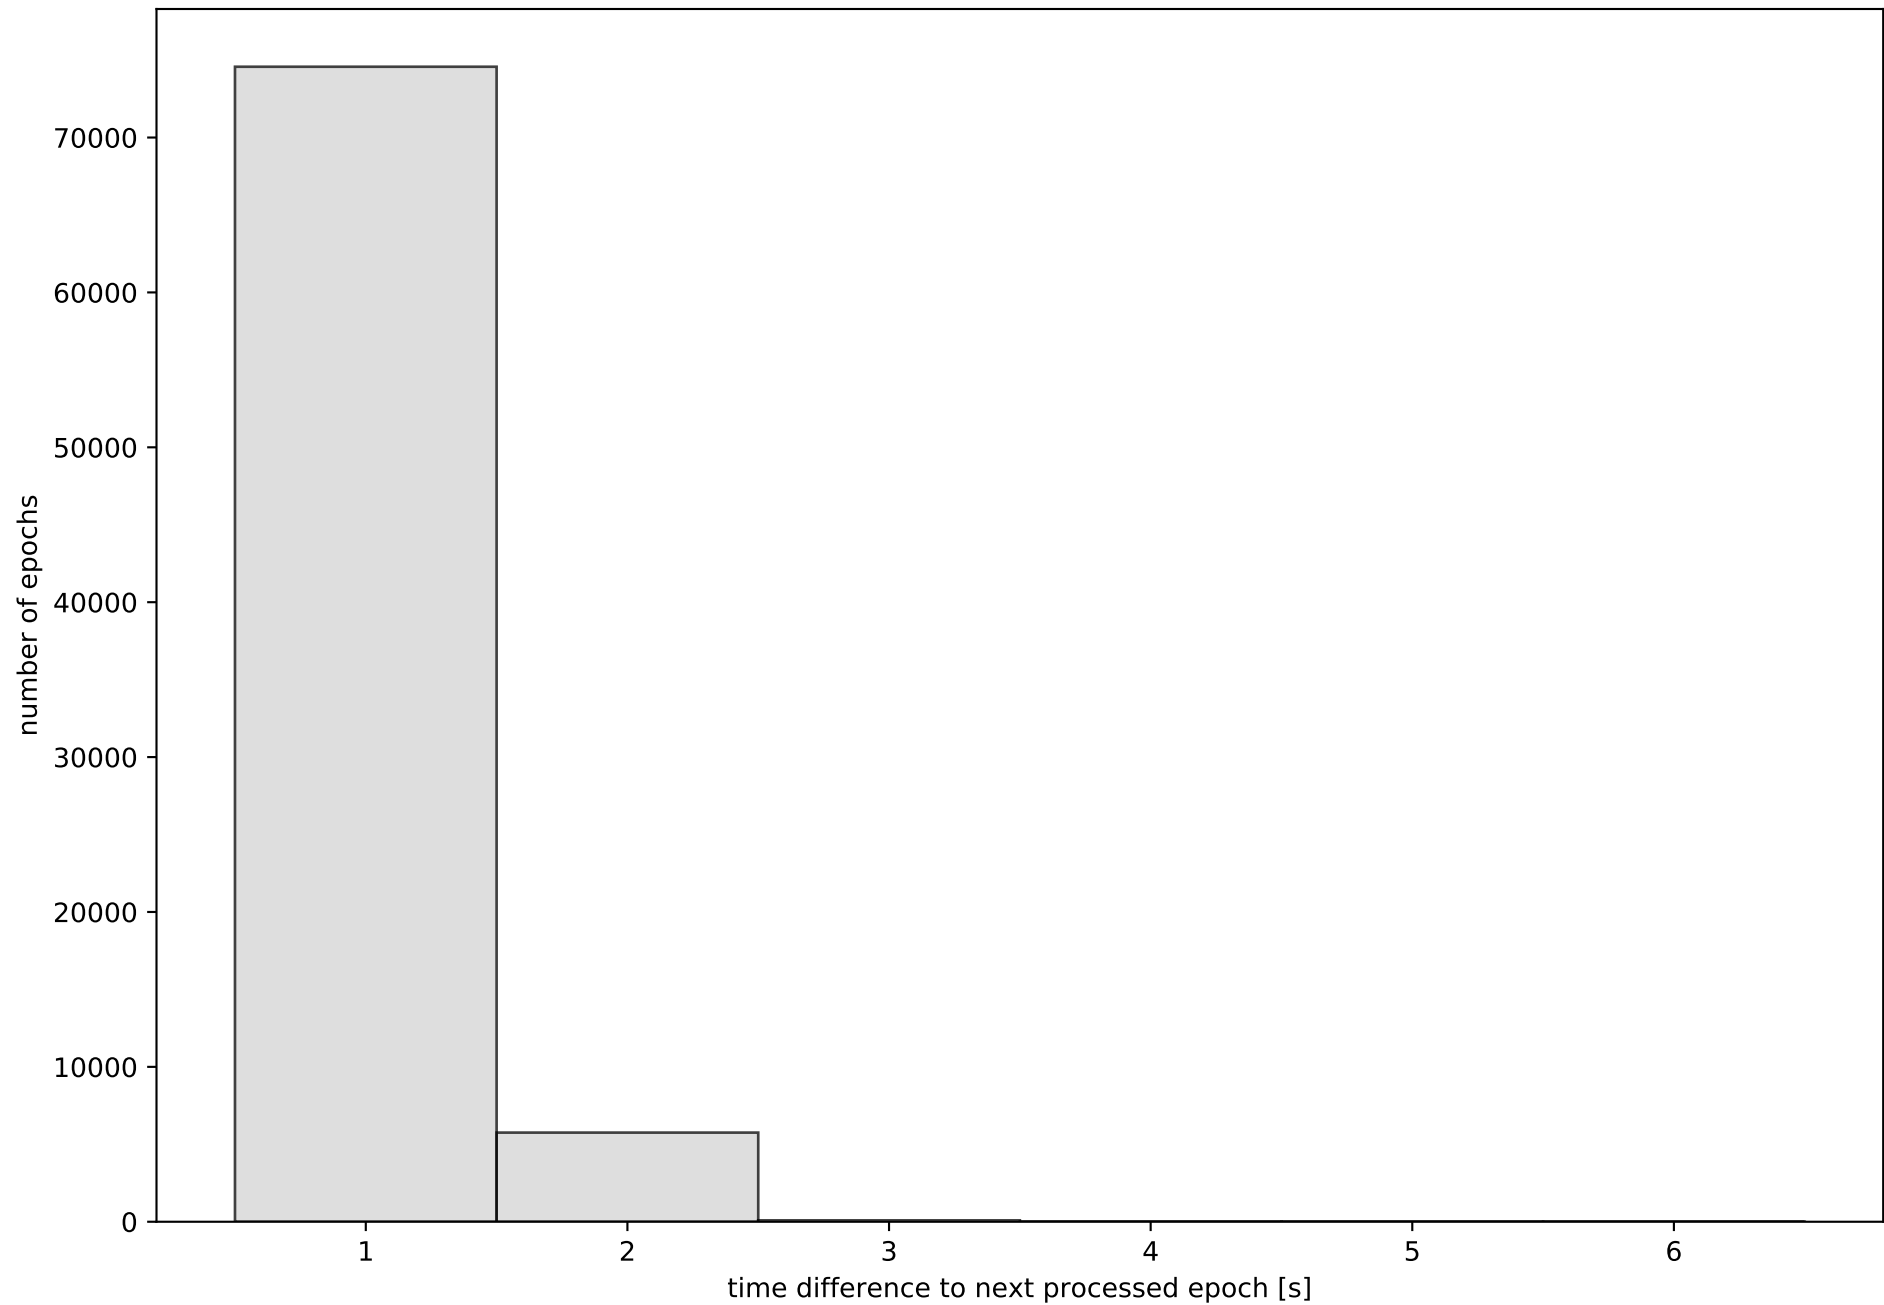


Network NT31 with threshold set to 0.3

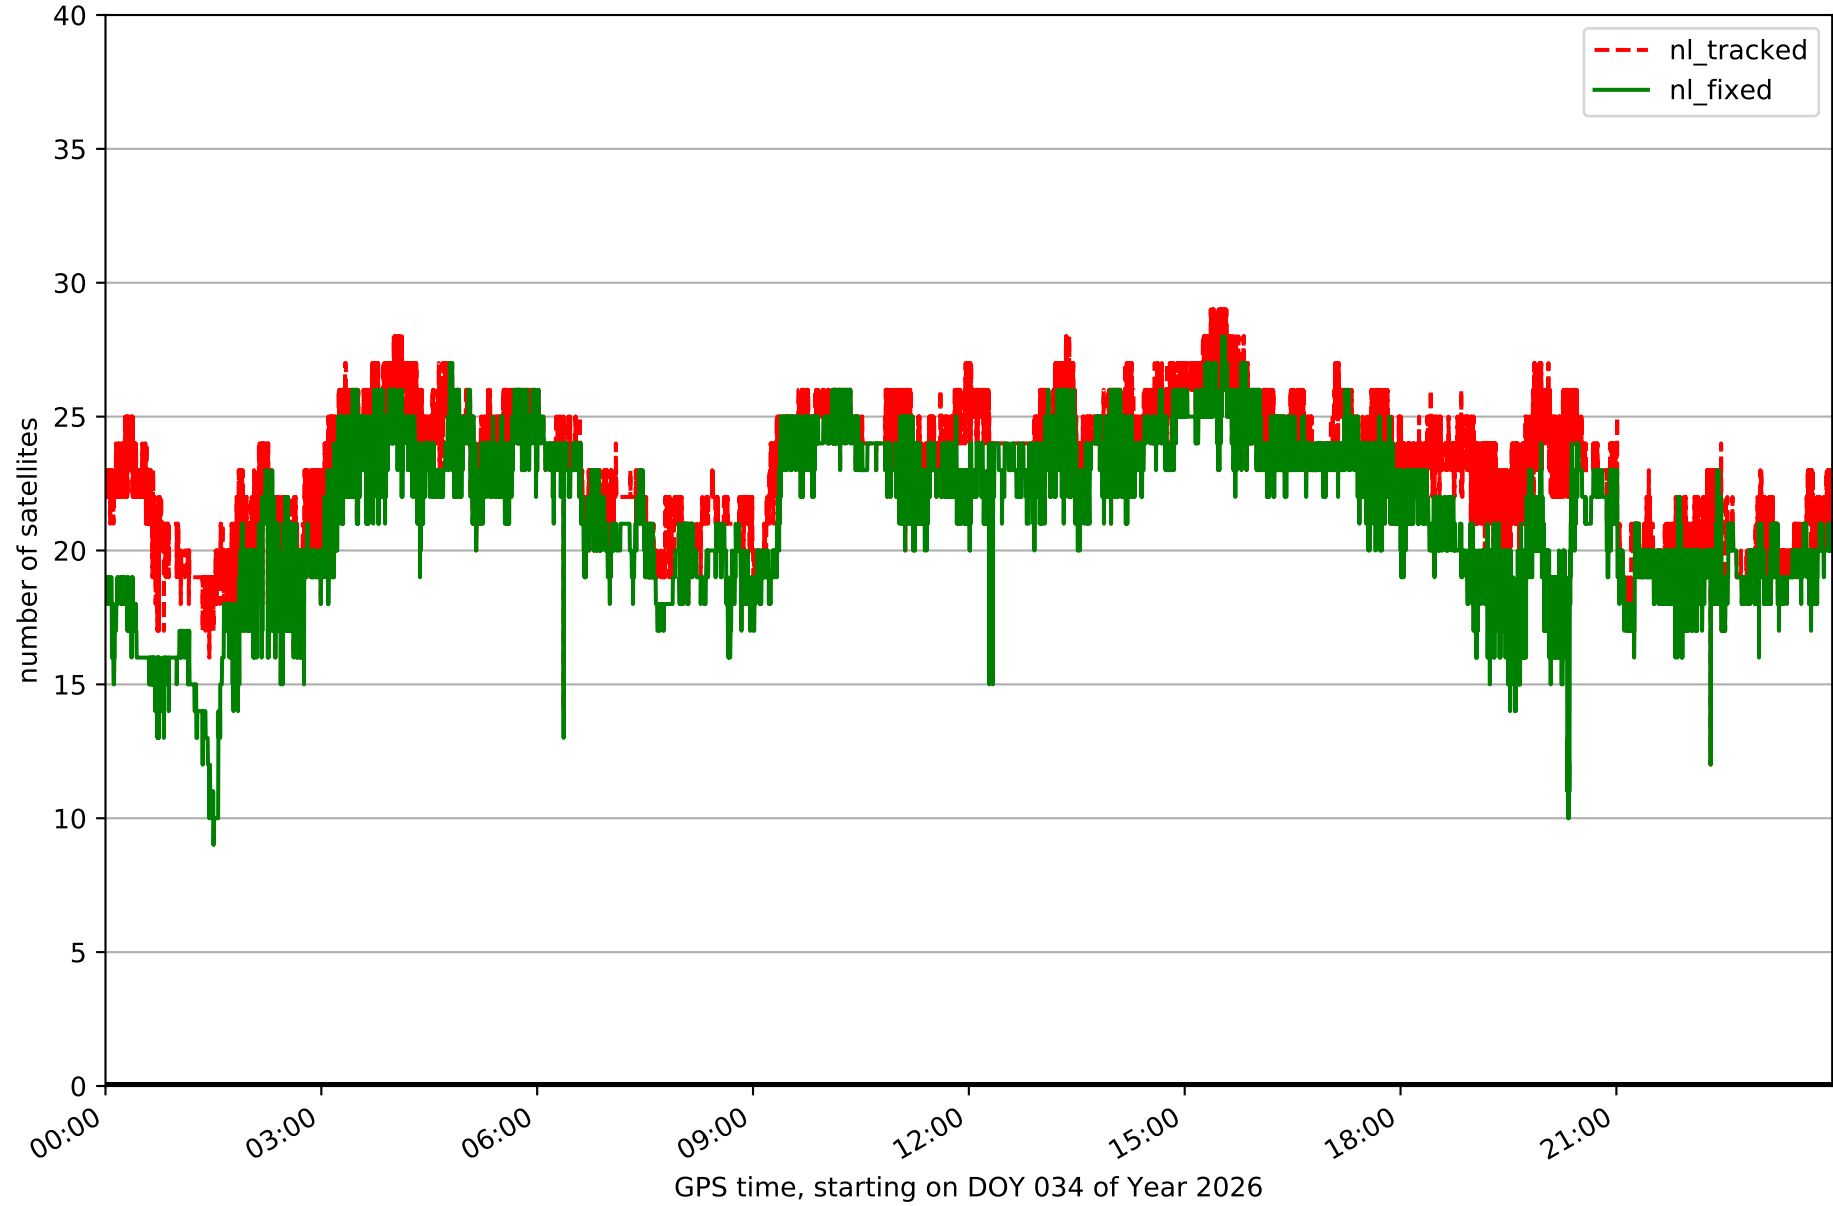


Fixing percentage of satellites in network NT31 with threshold set to 0.3

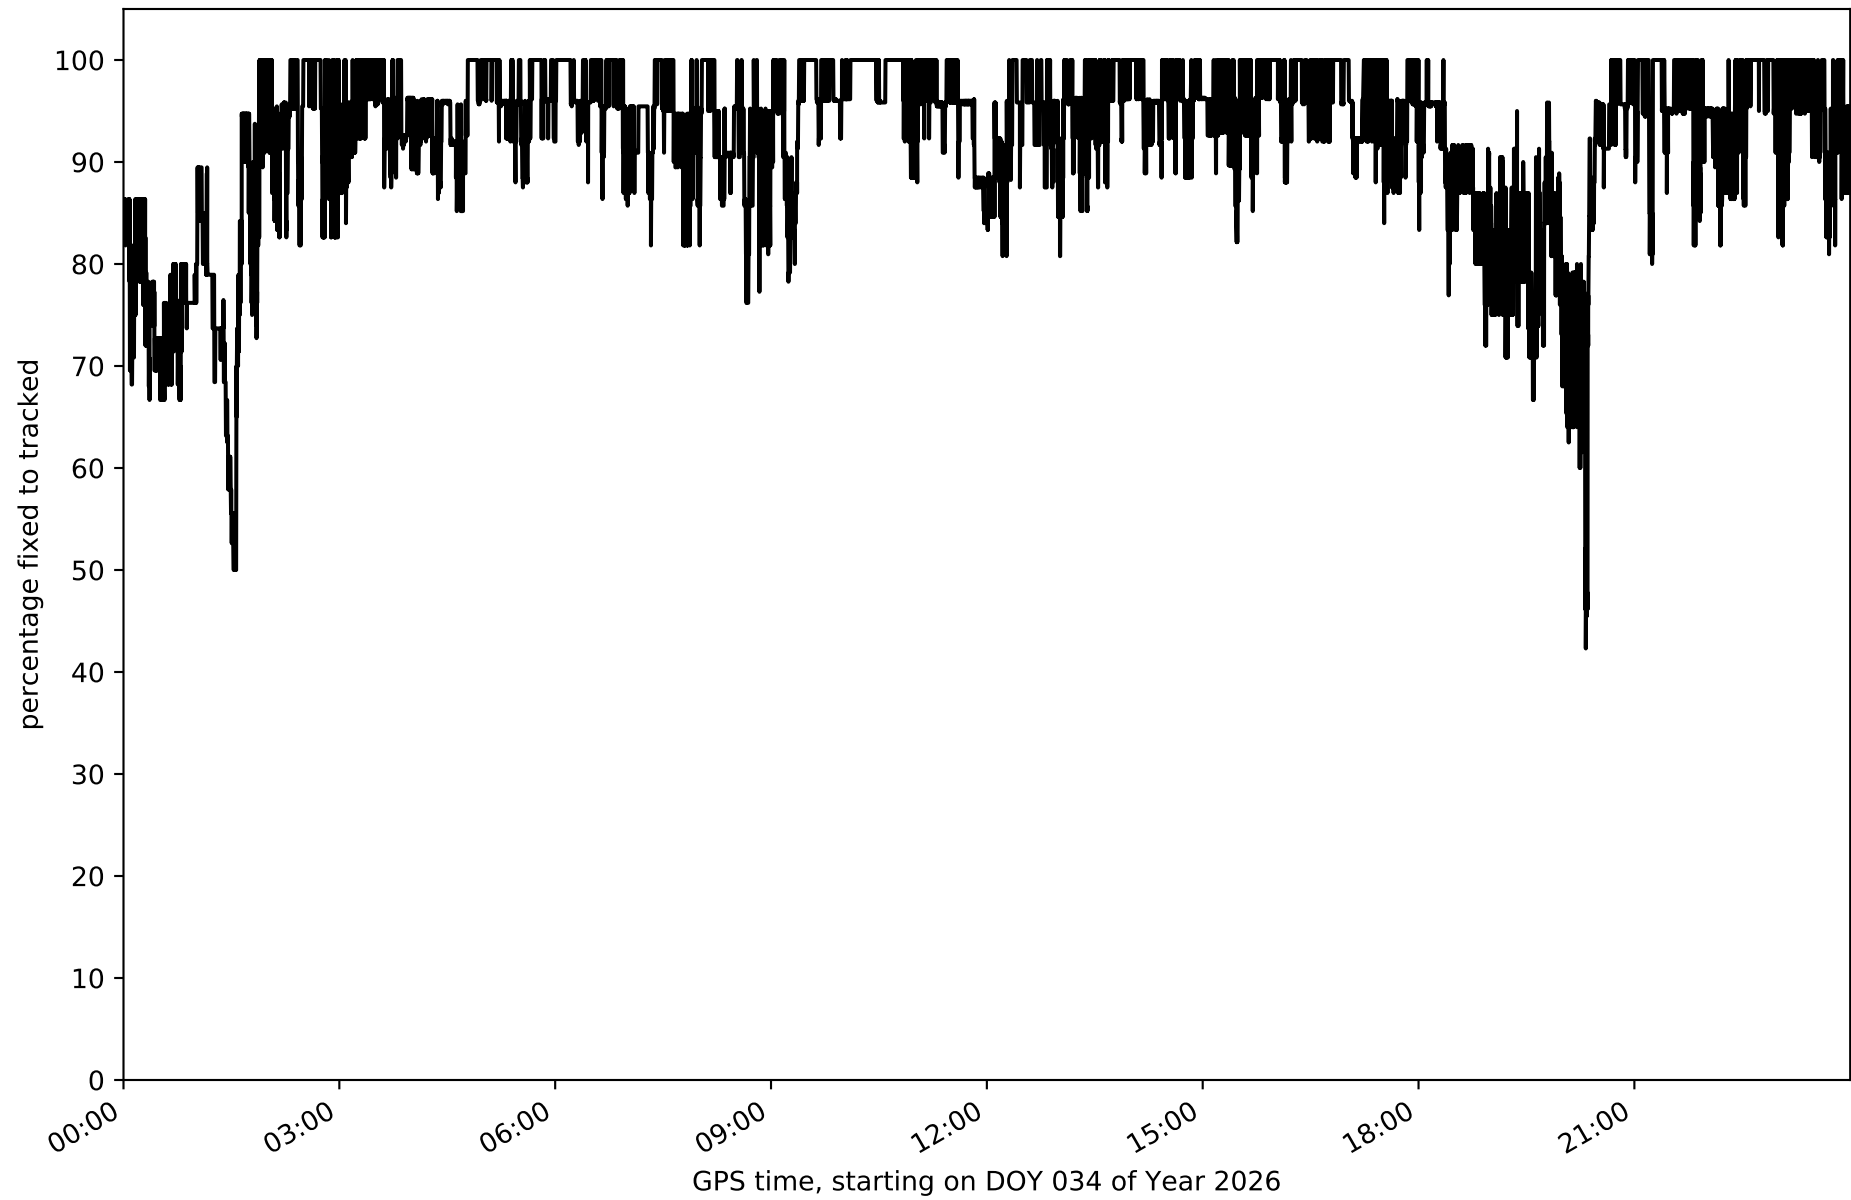


Network NT31 - only GPS with threshold set to 0.3

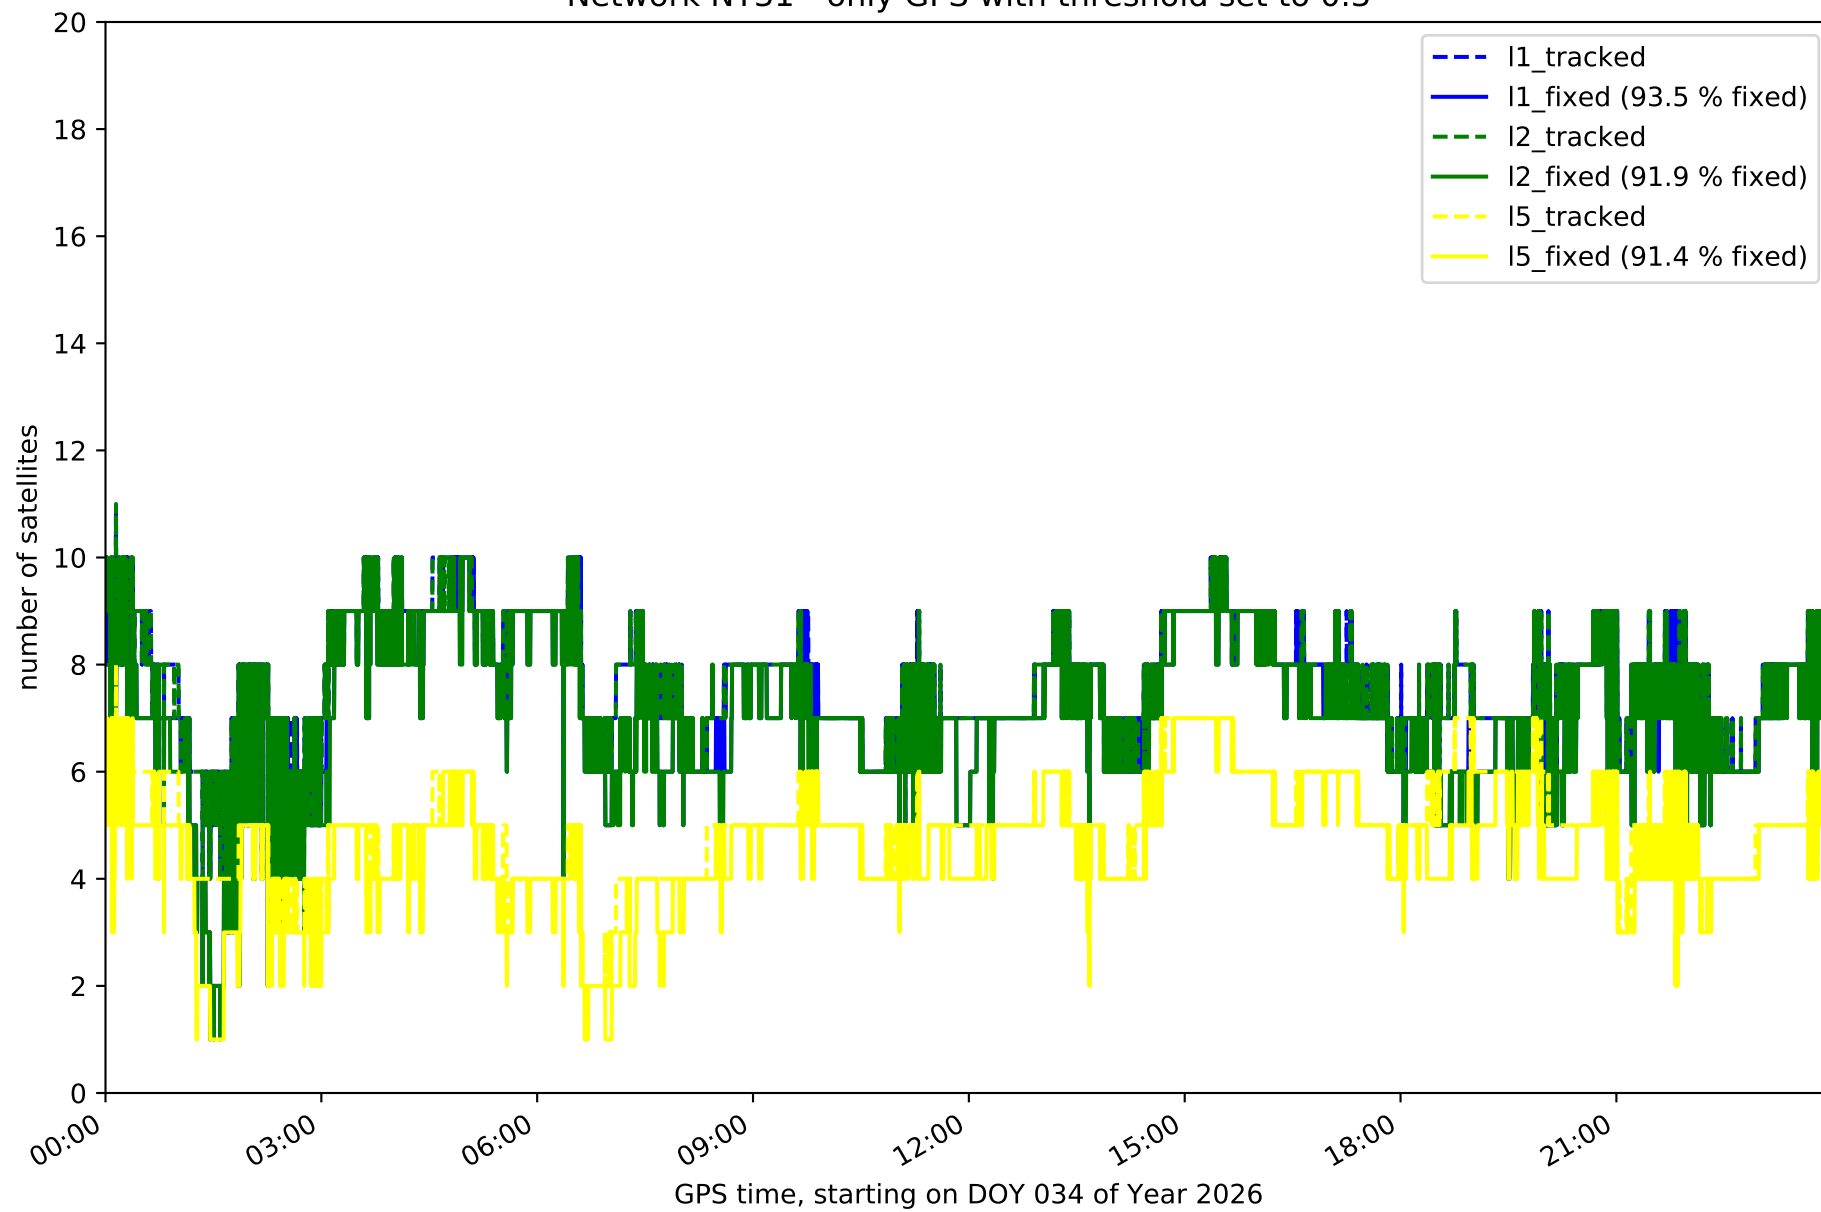


Network NT31 - only GLONASS with threshold set to 0.3

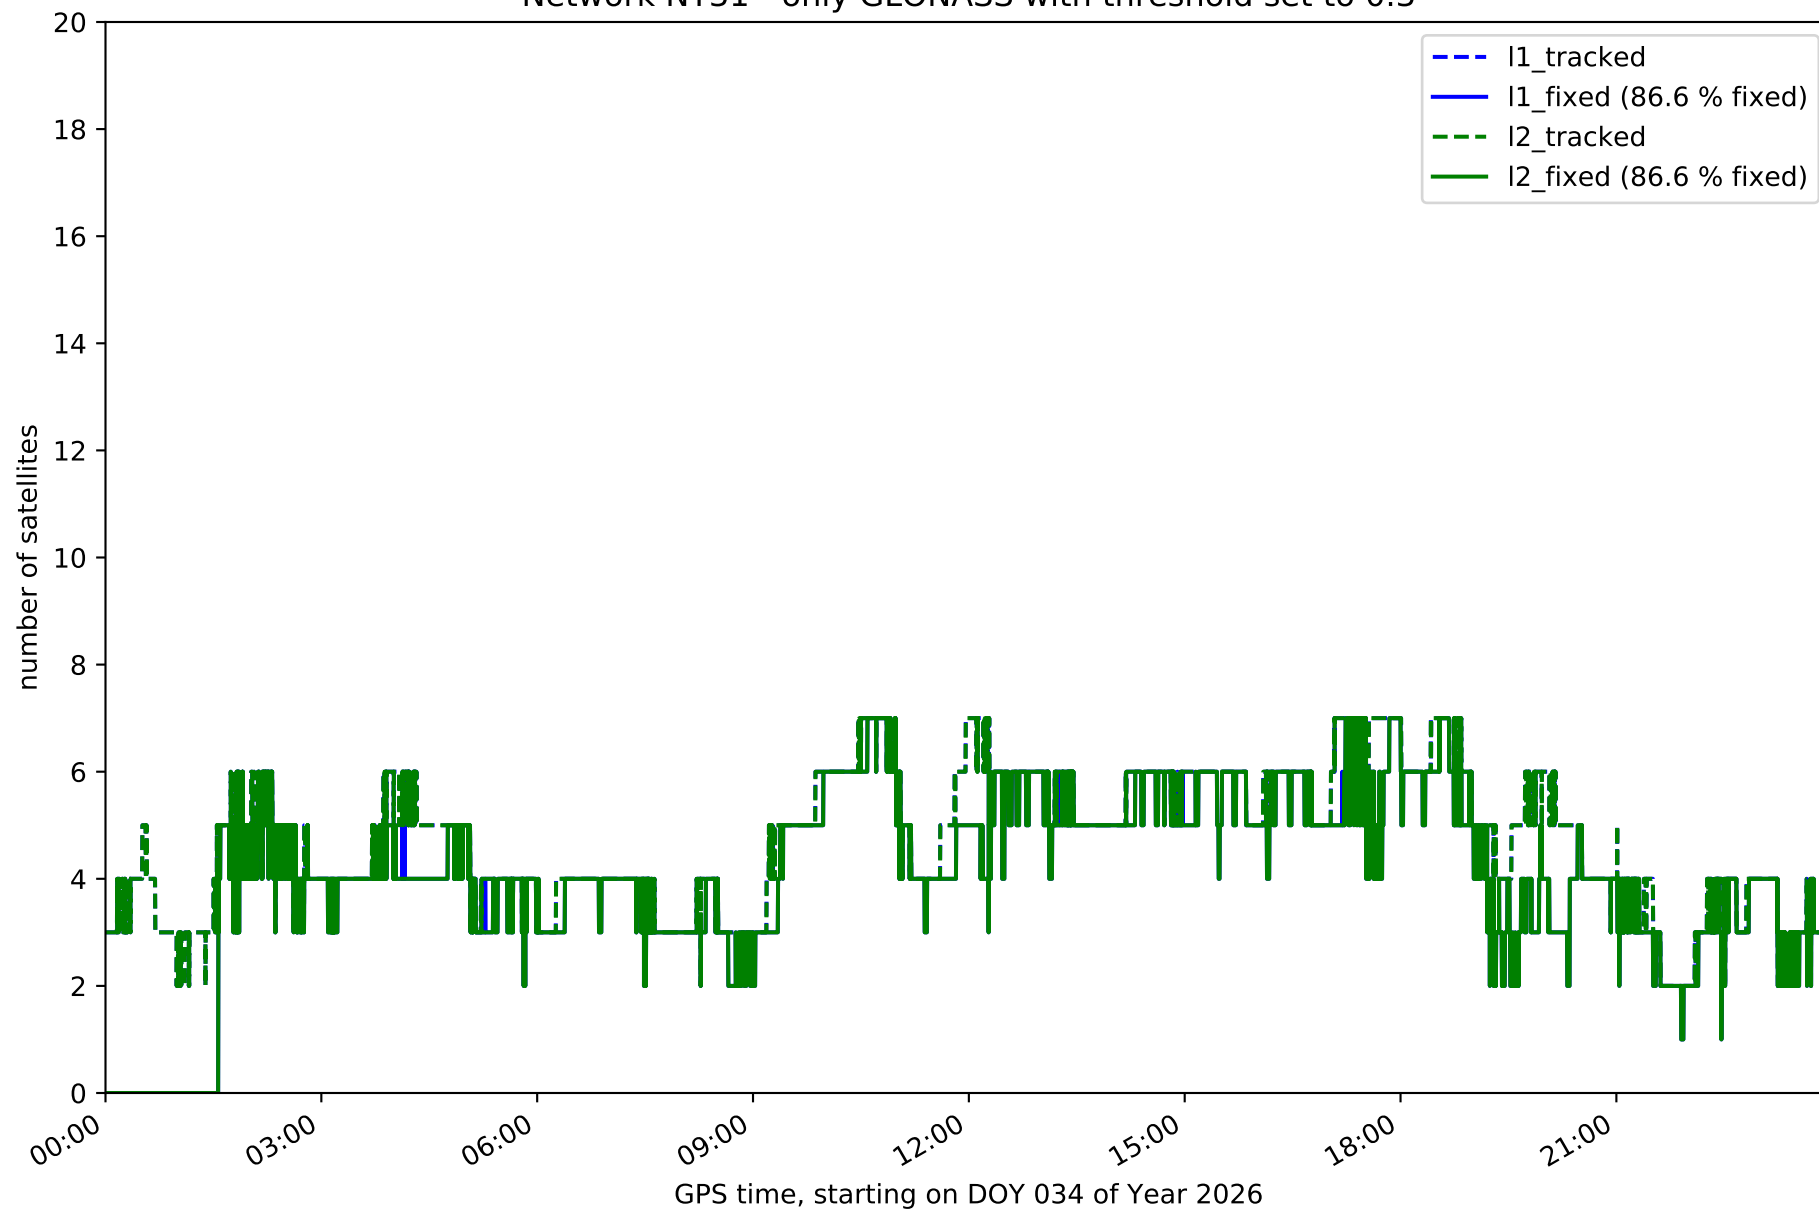


Network NT31 - only BDS with threshold set to 0.3

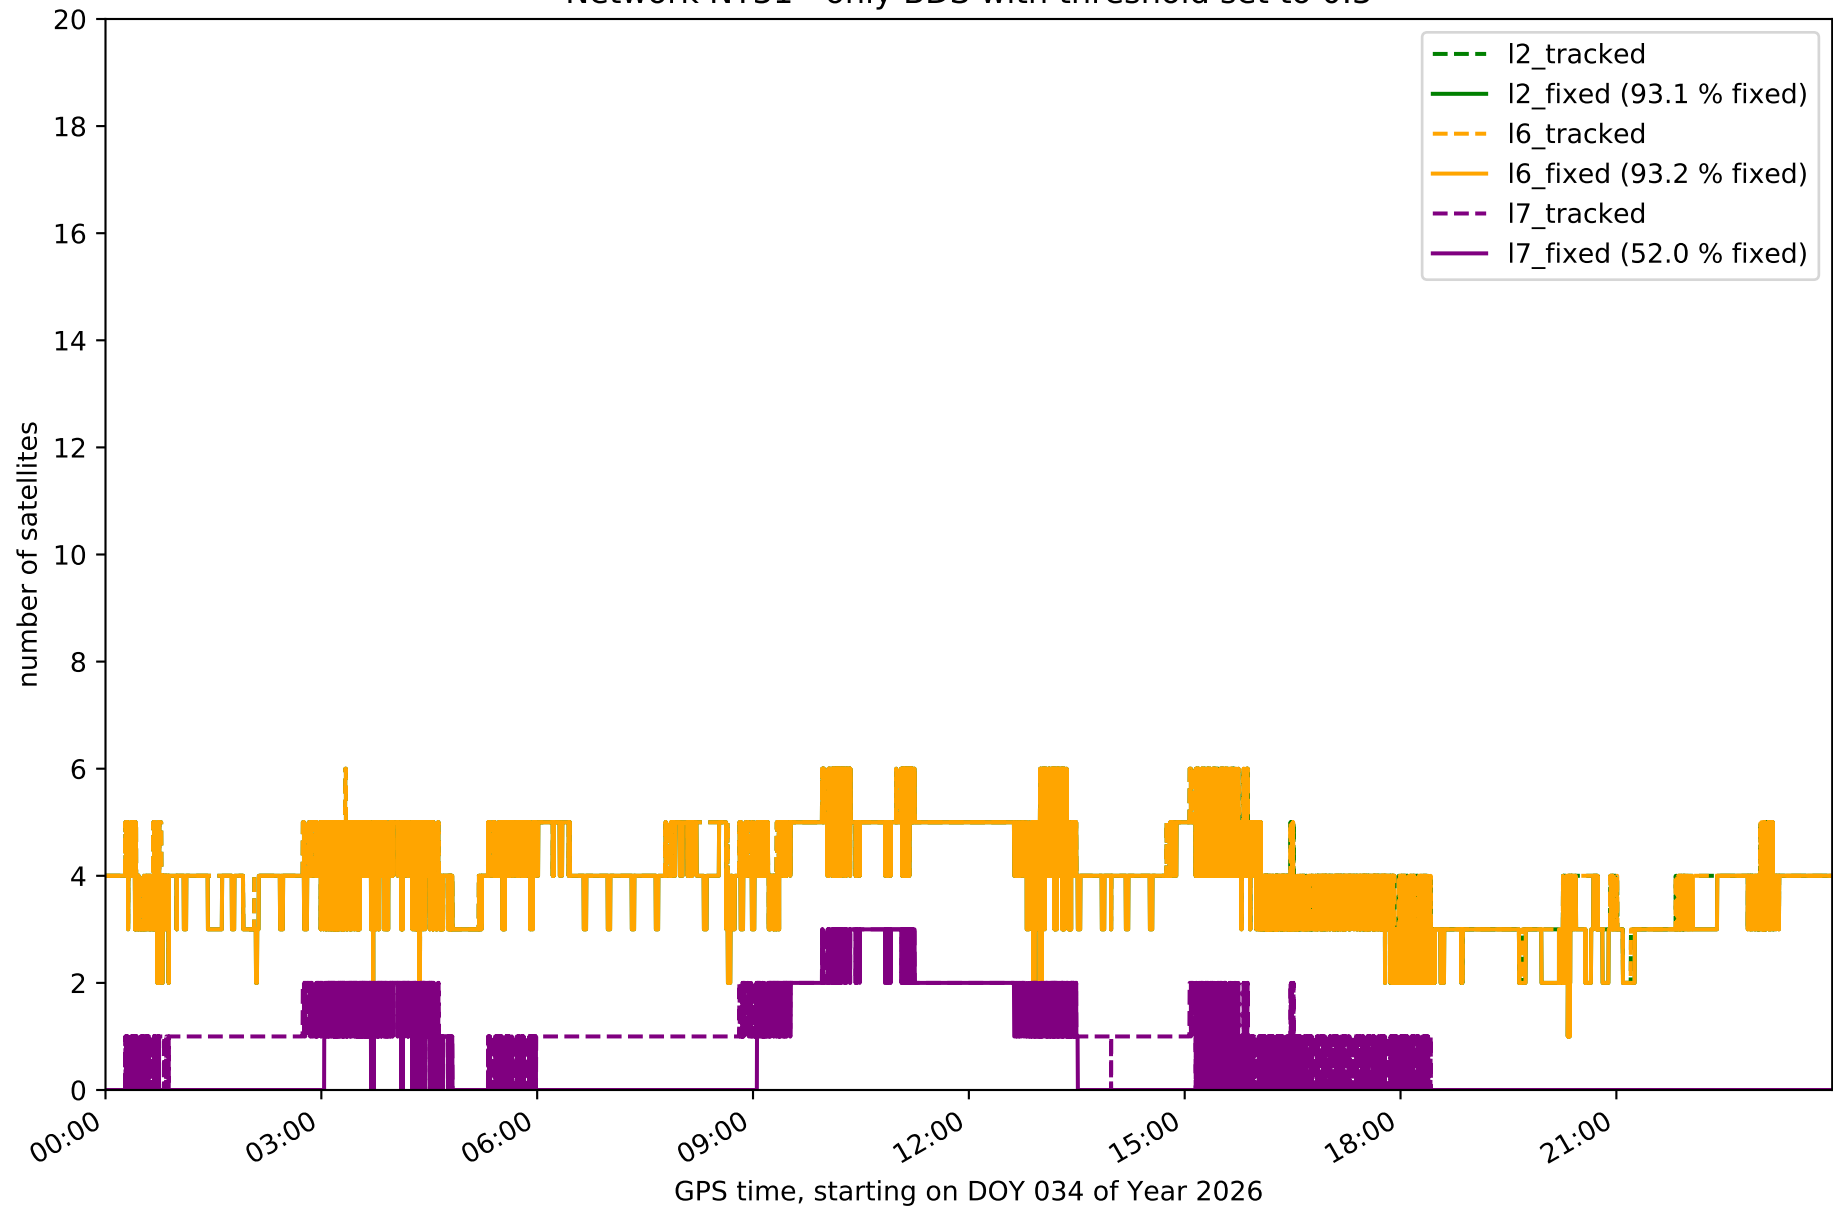


Network NT31 - only Galileo with threshold set to 0.3

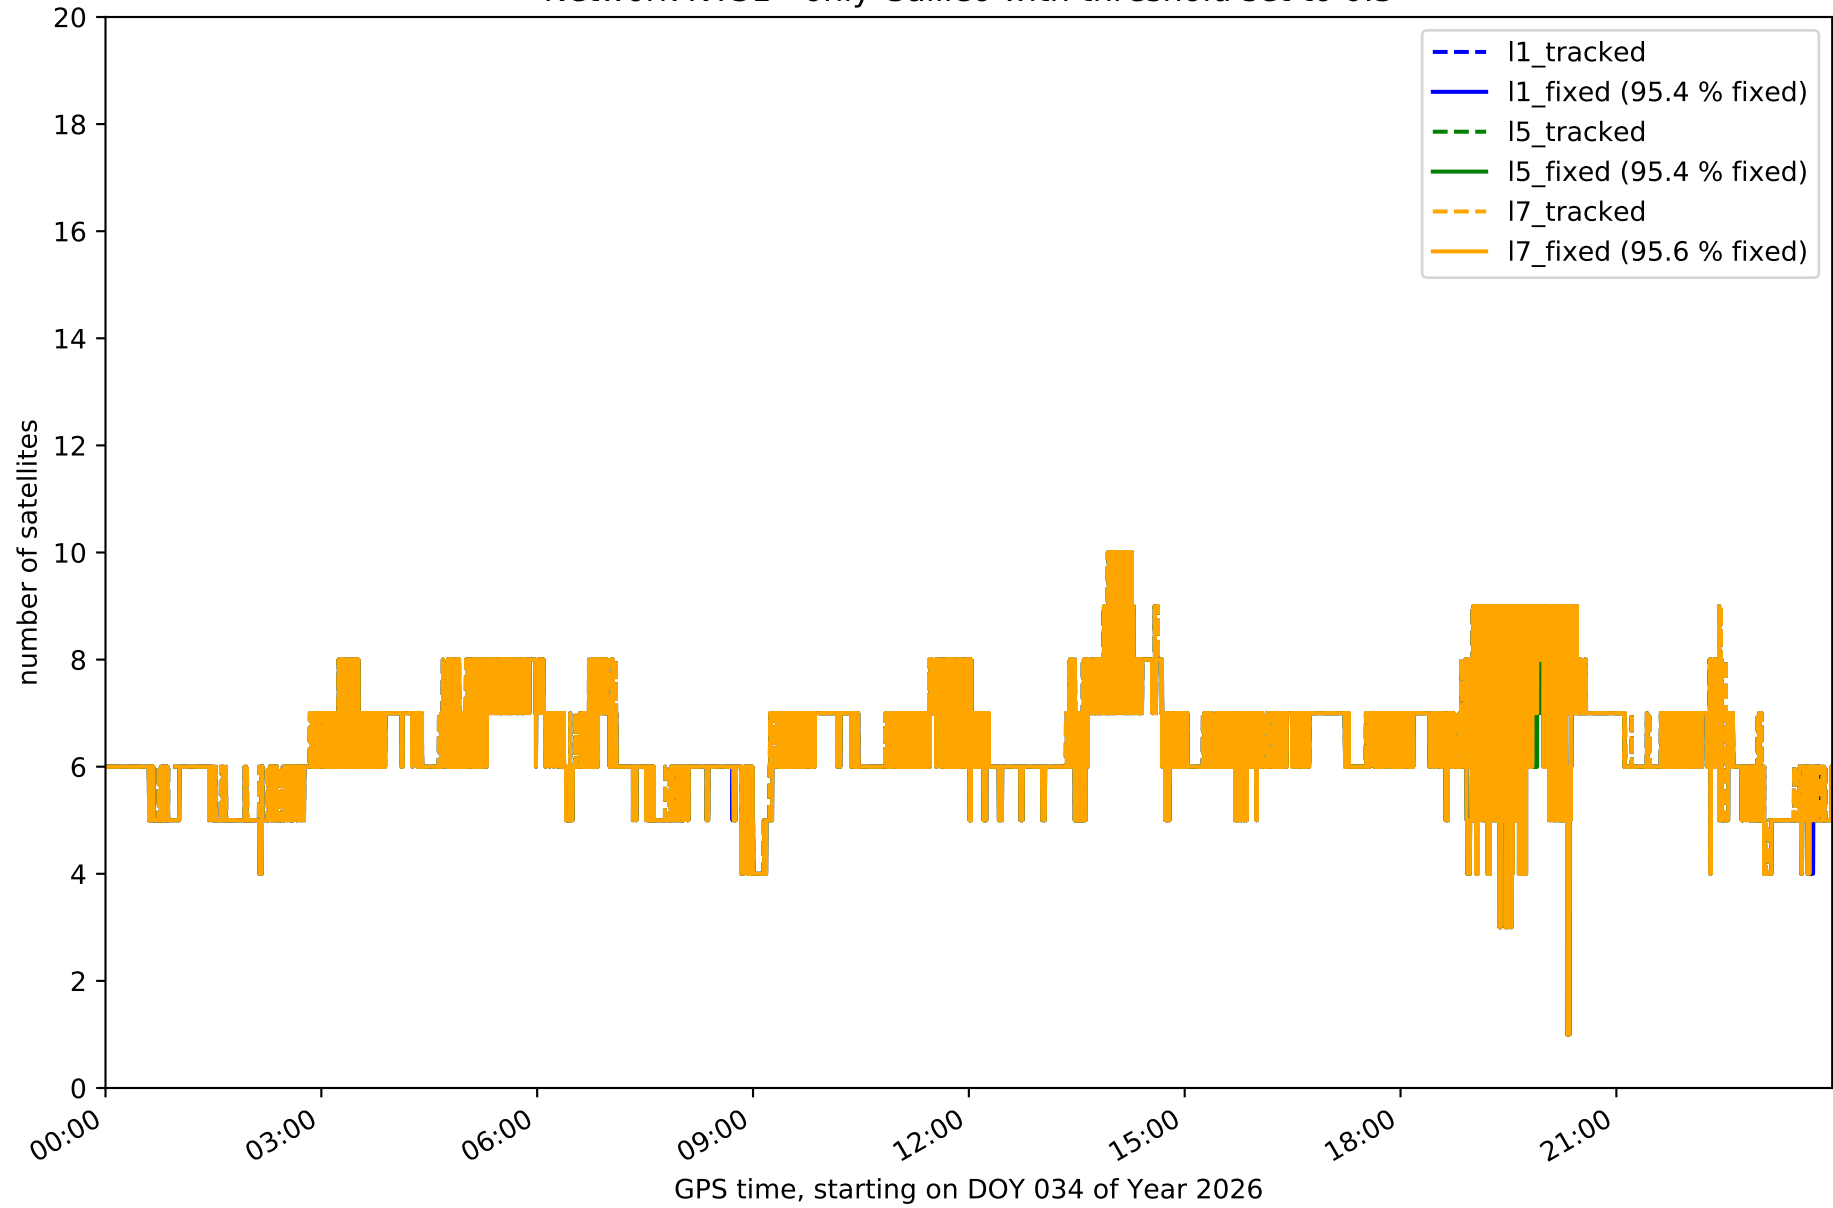


Station FUER in network NT31

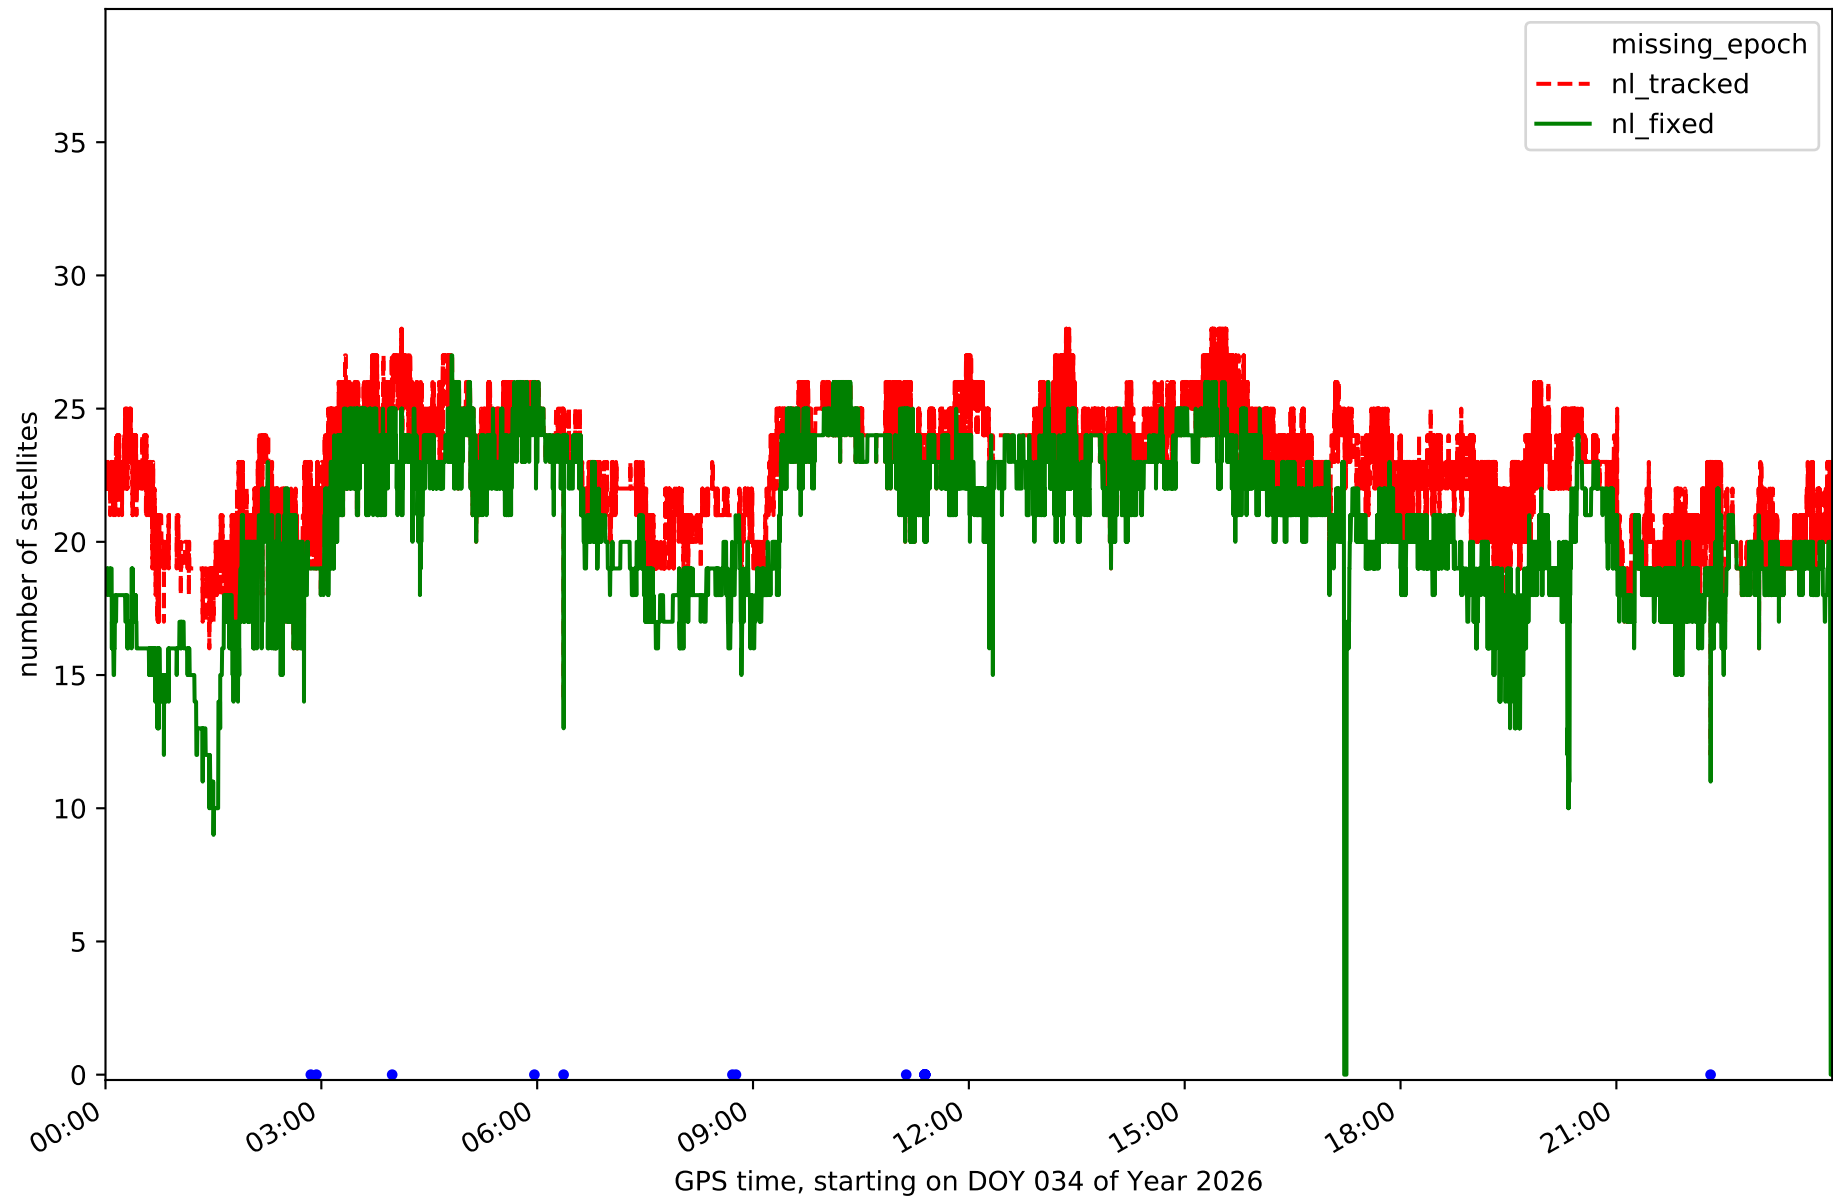


Station LALA in network NT31

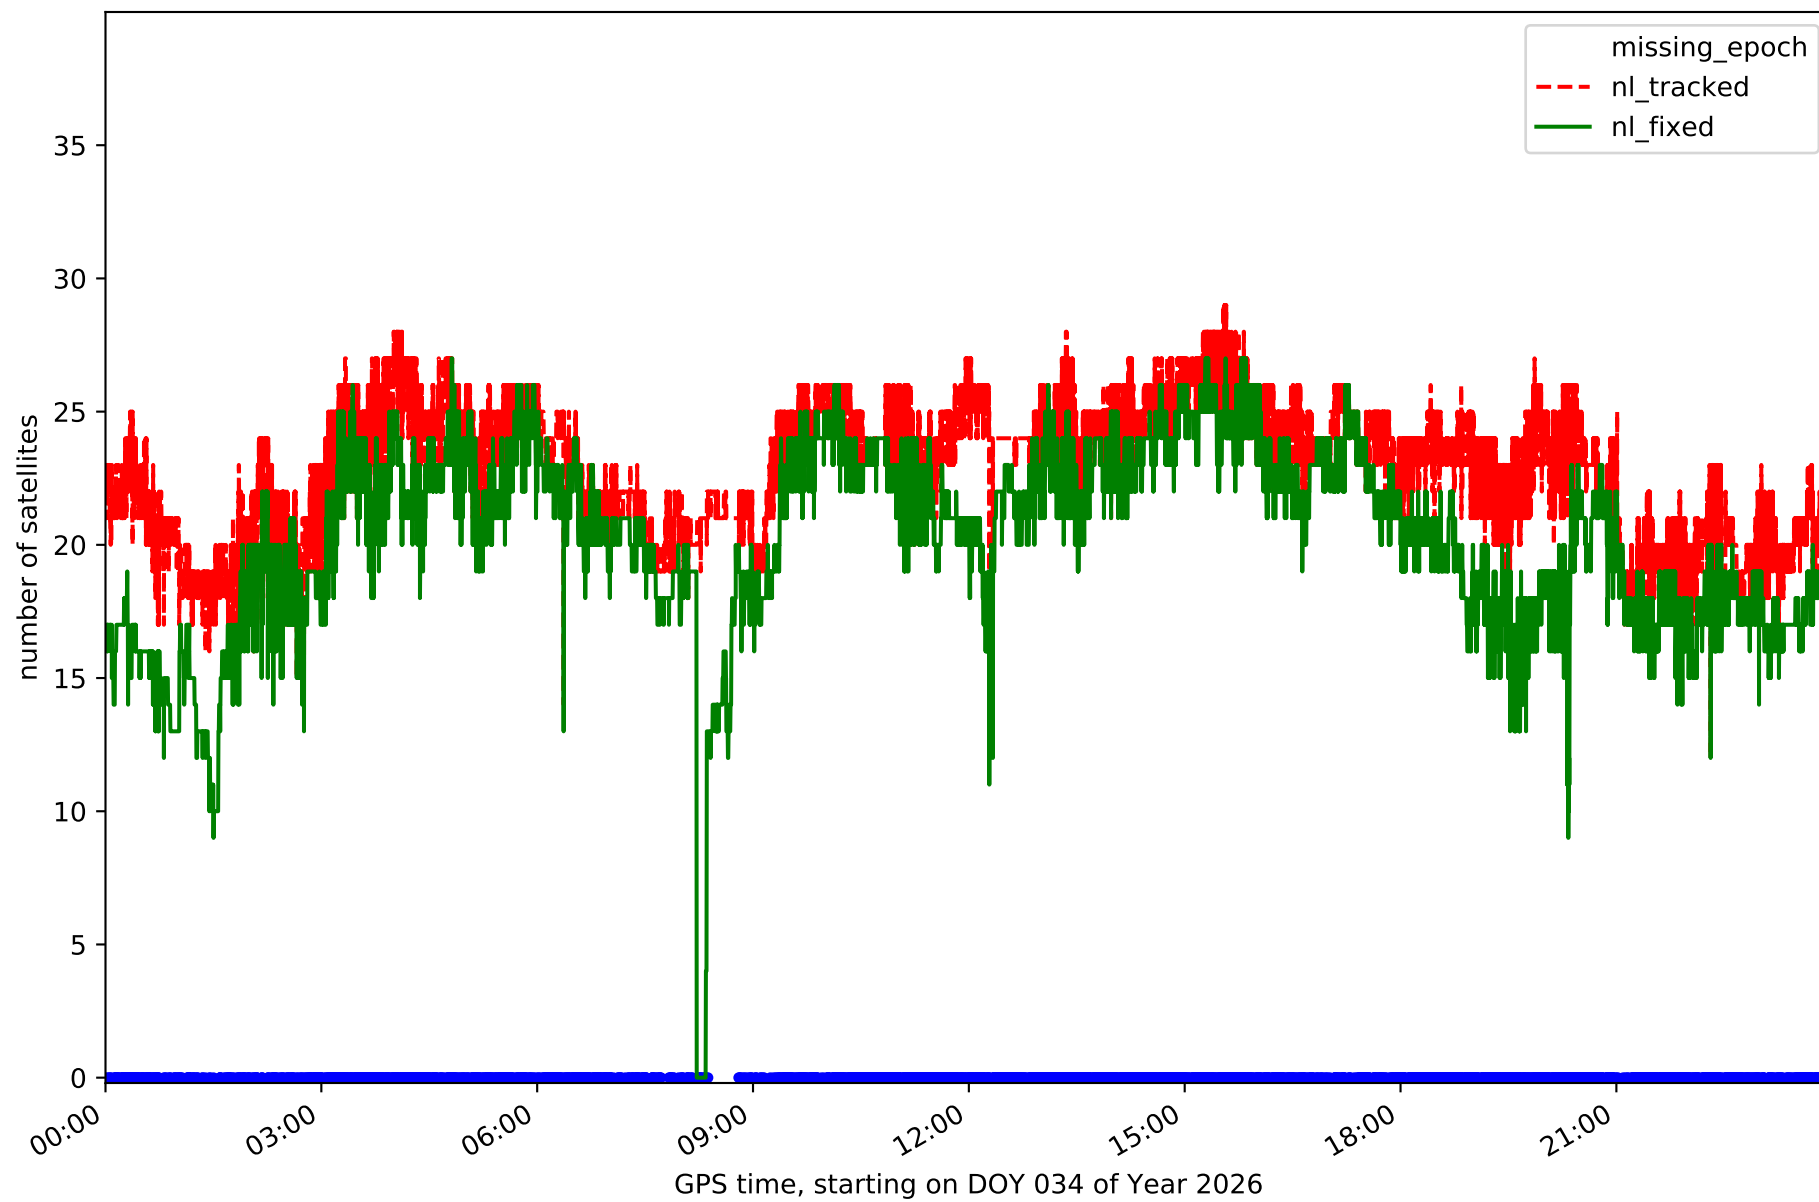


Station LZ02 in network NT31

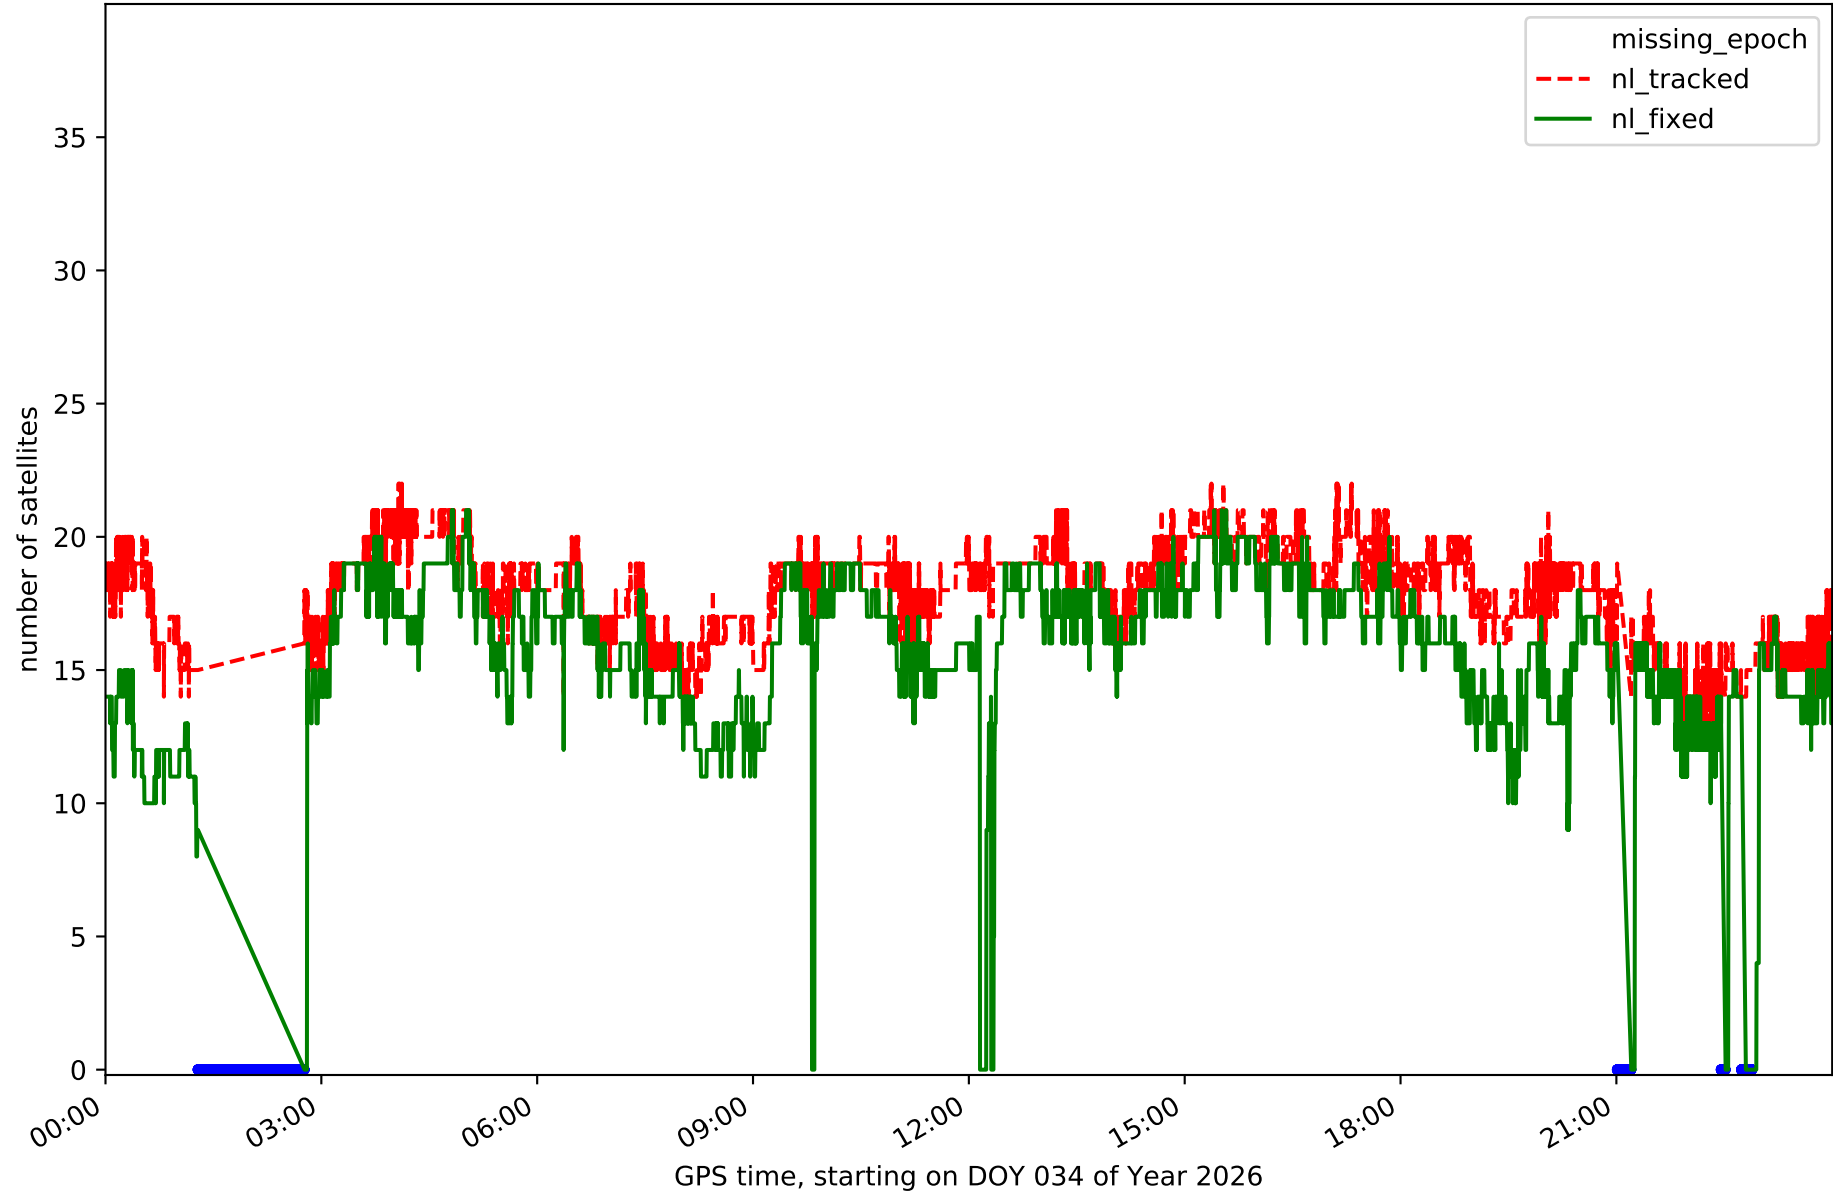


Station LZ03 in network NT31

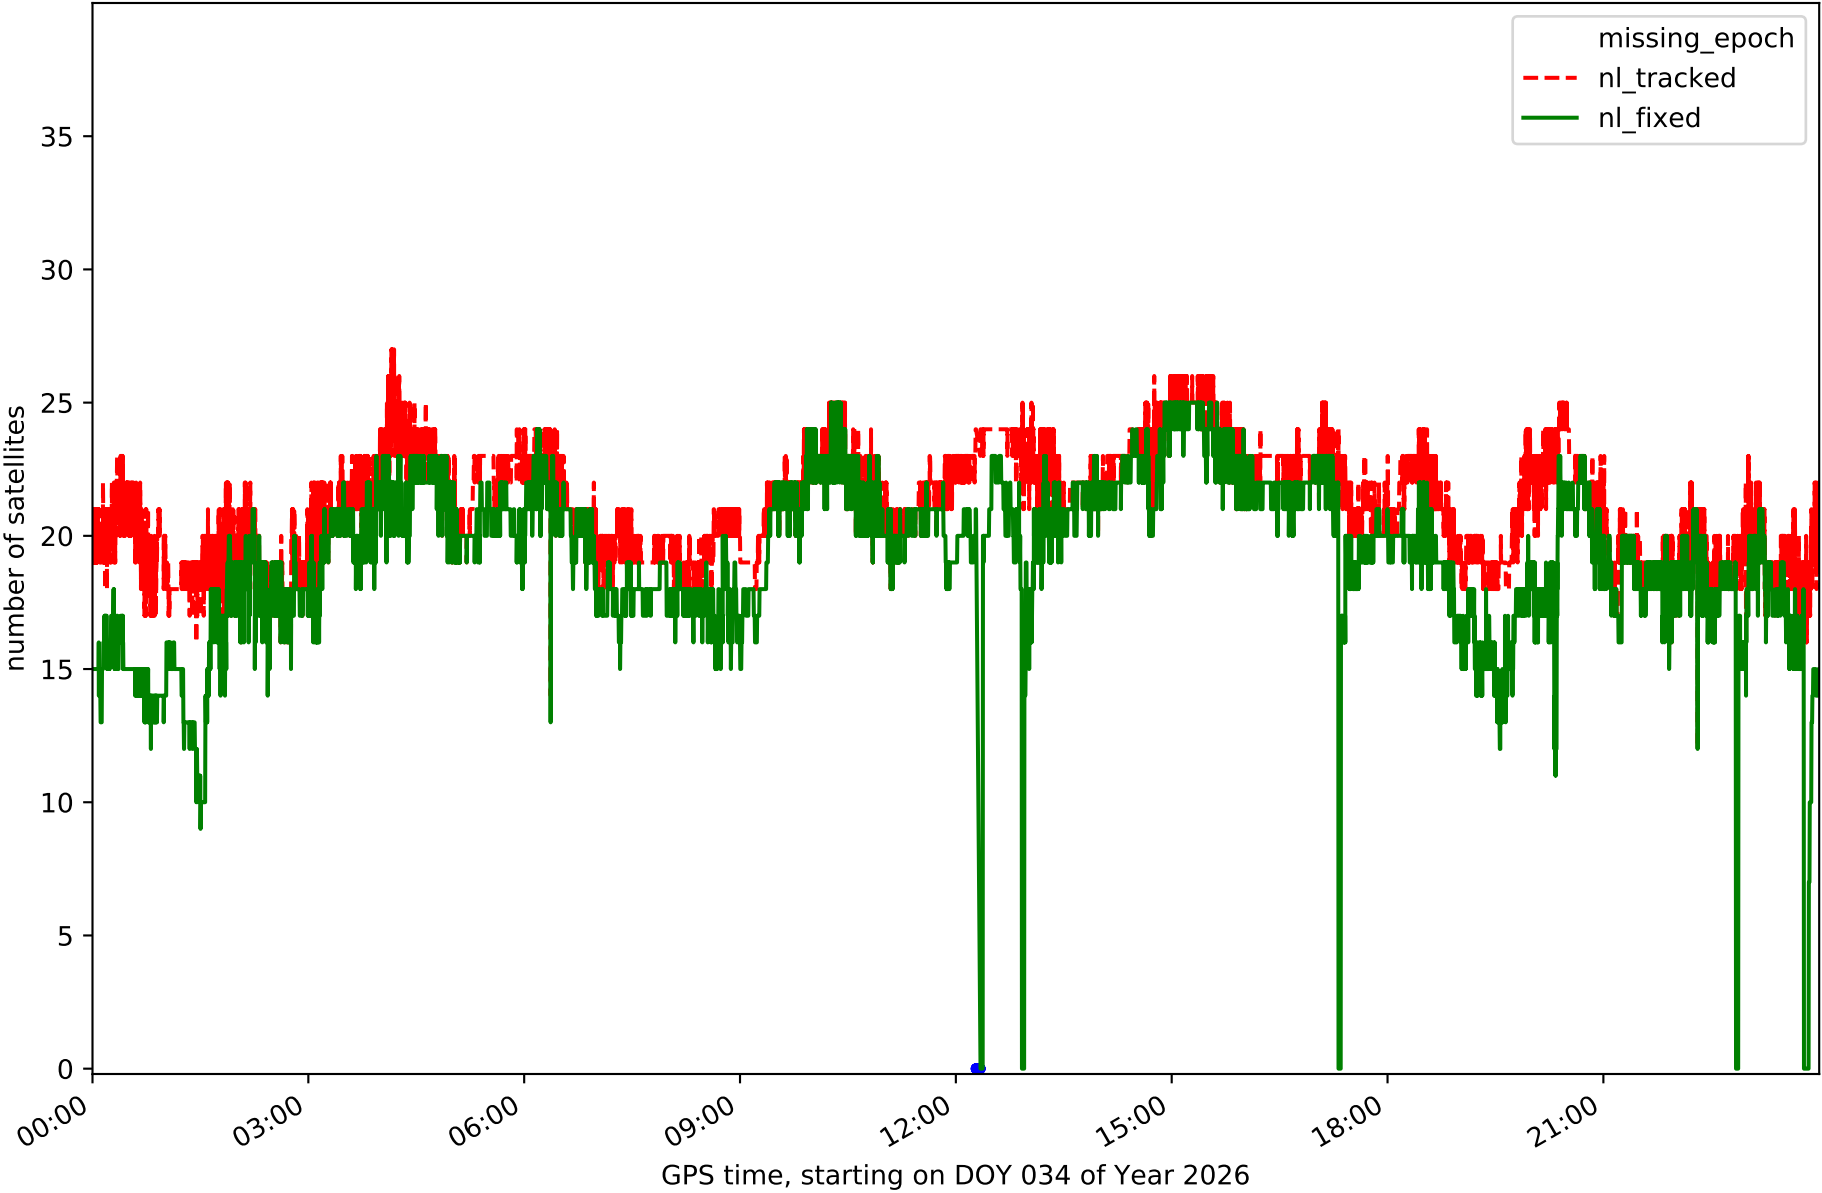


Station MASP in network NT31

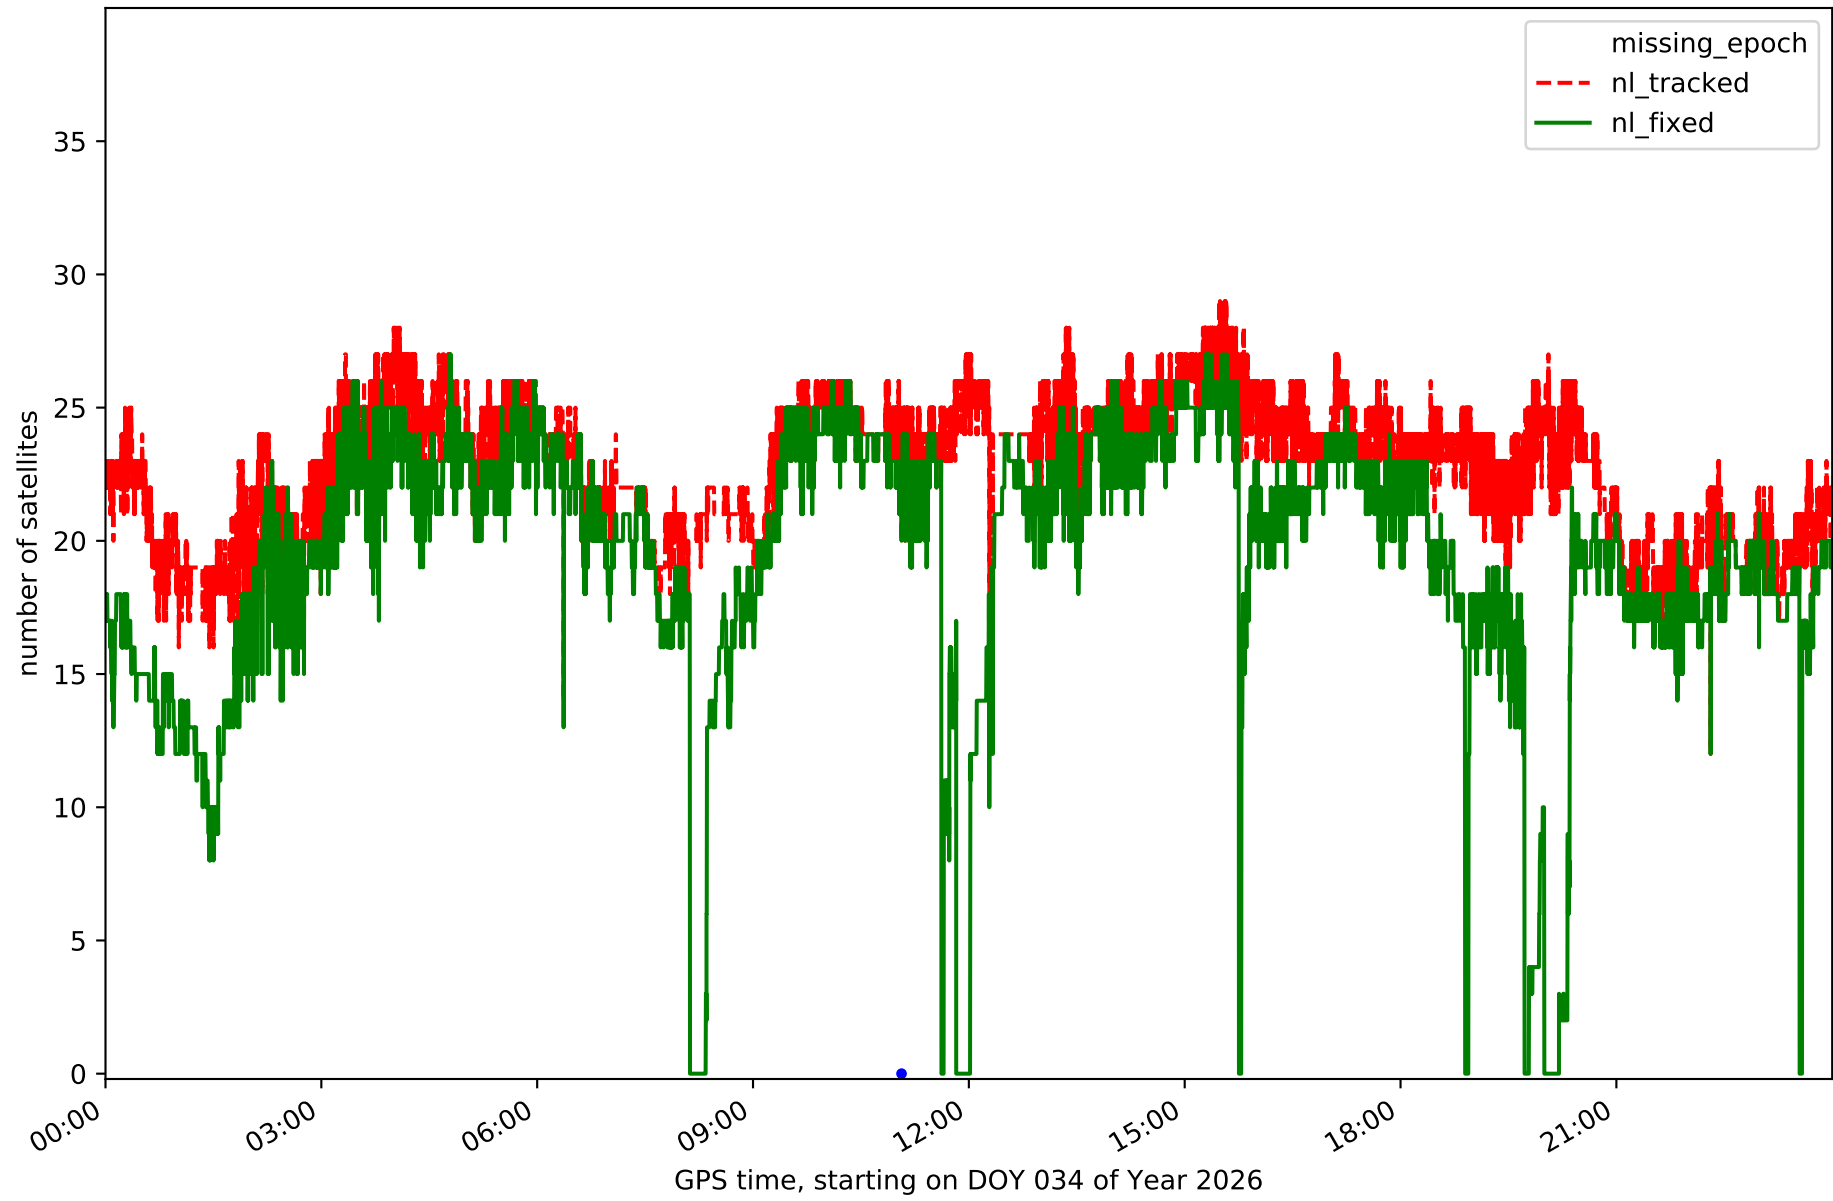


Station ULP2 in network NT31

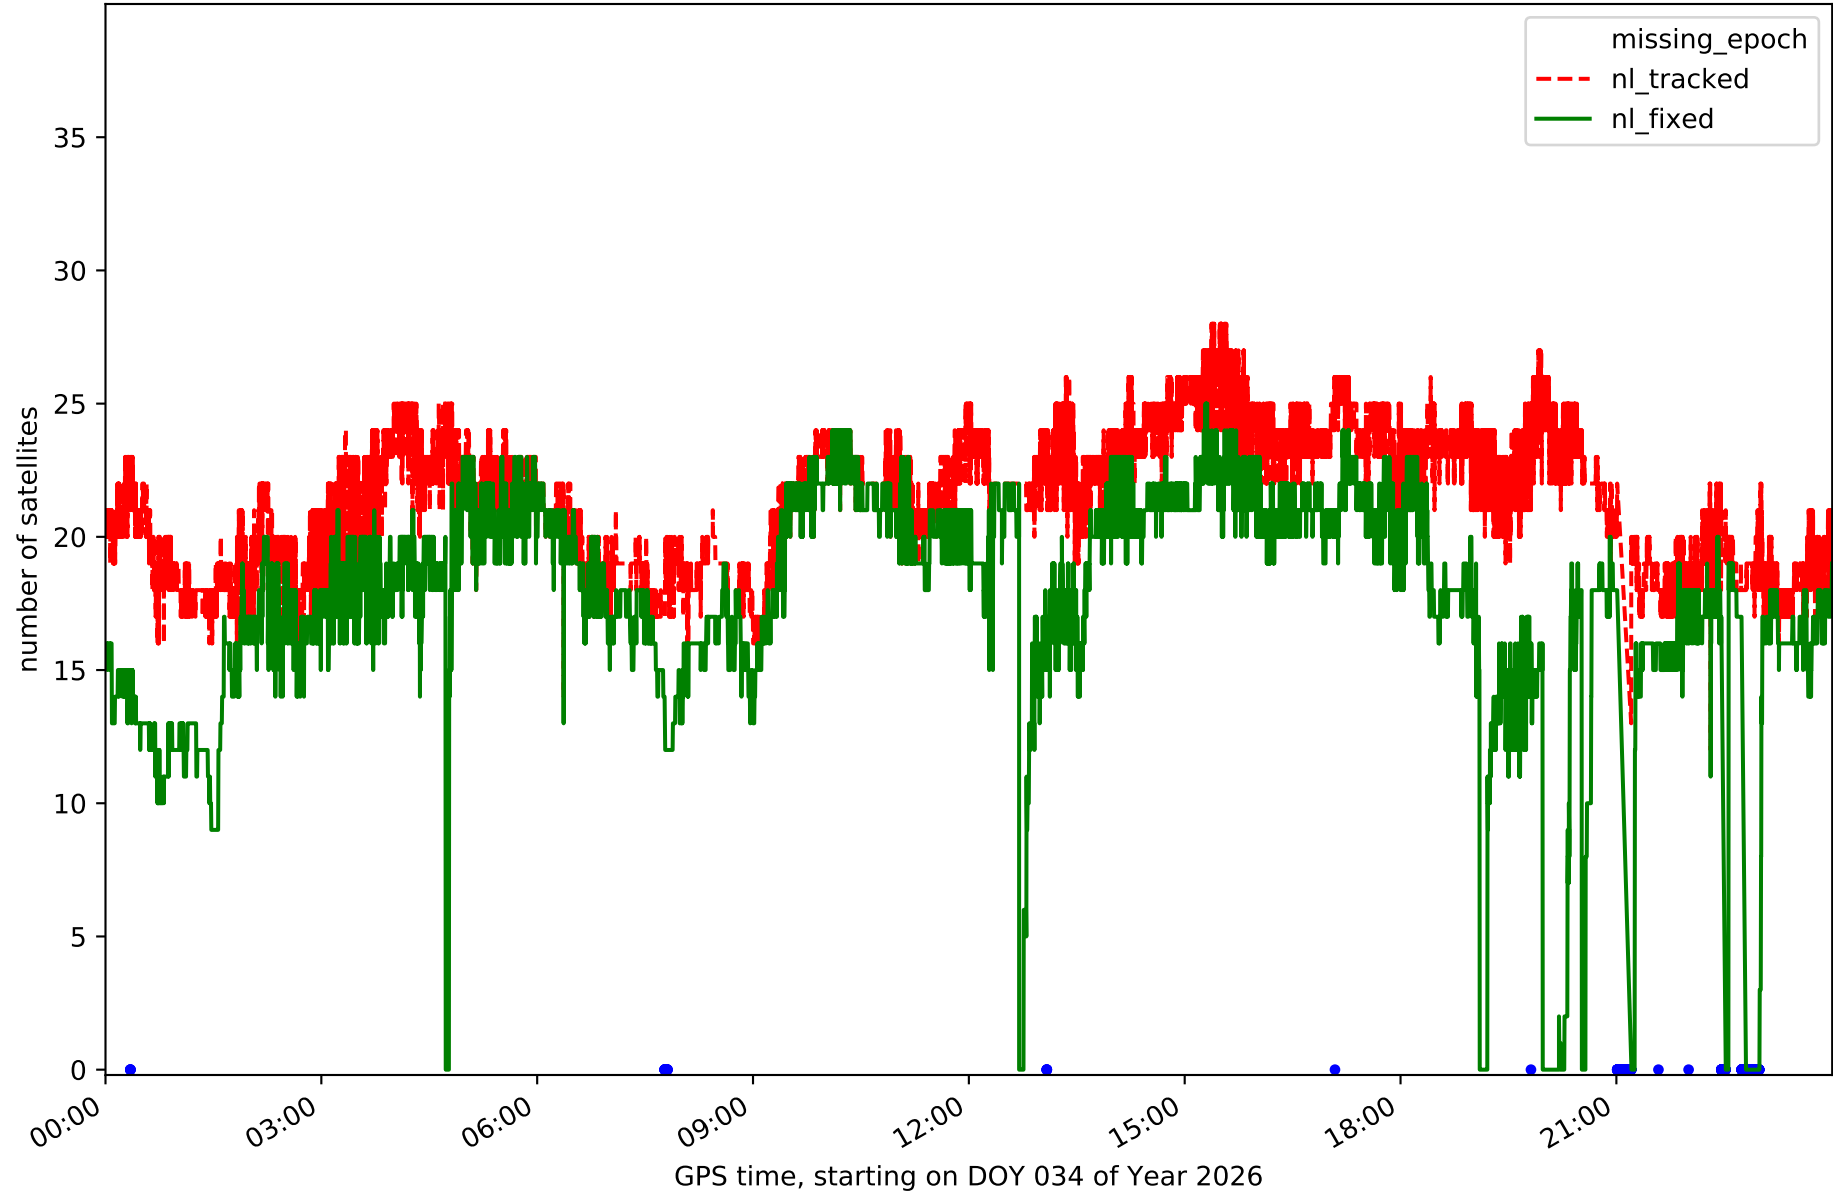


RefCheck for station FUER in network NT31

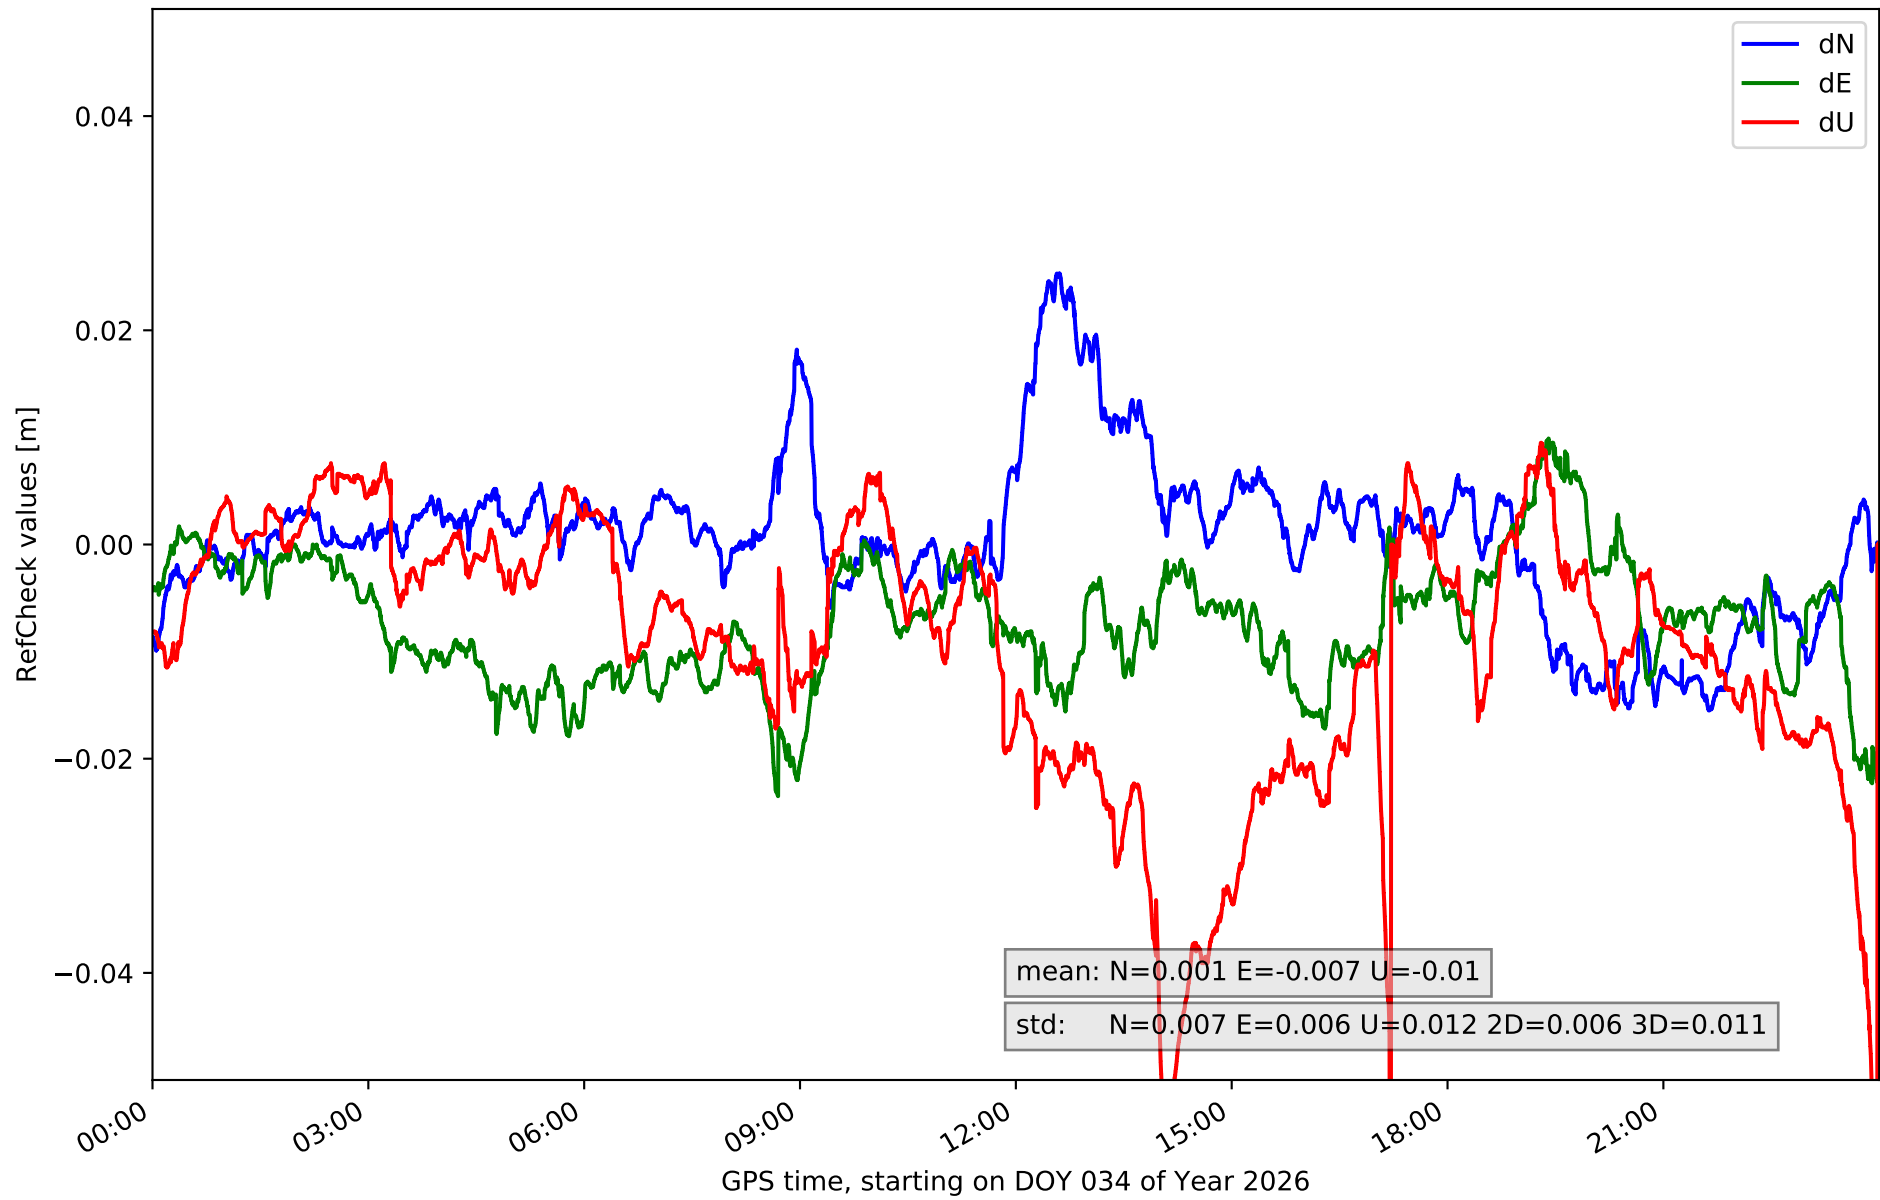


RefCheck for station LALA in network NT31

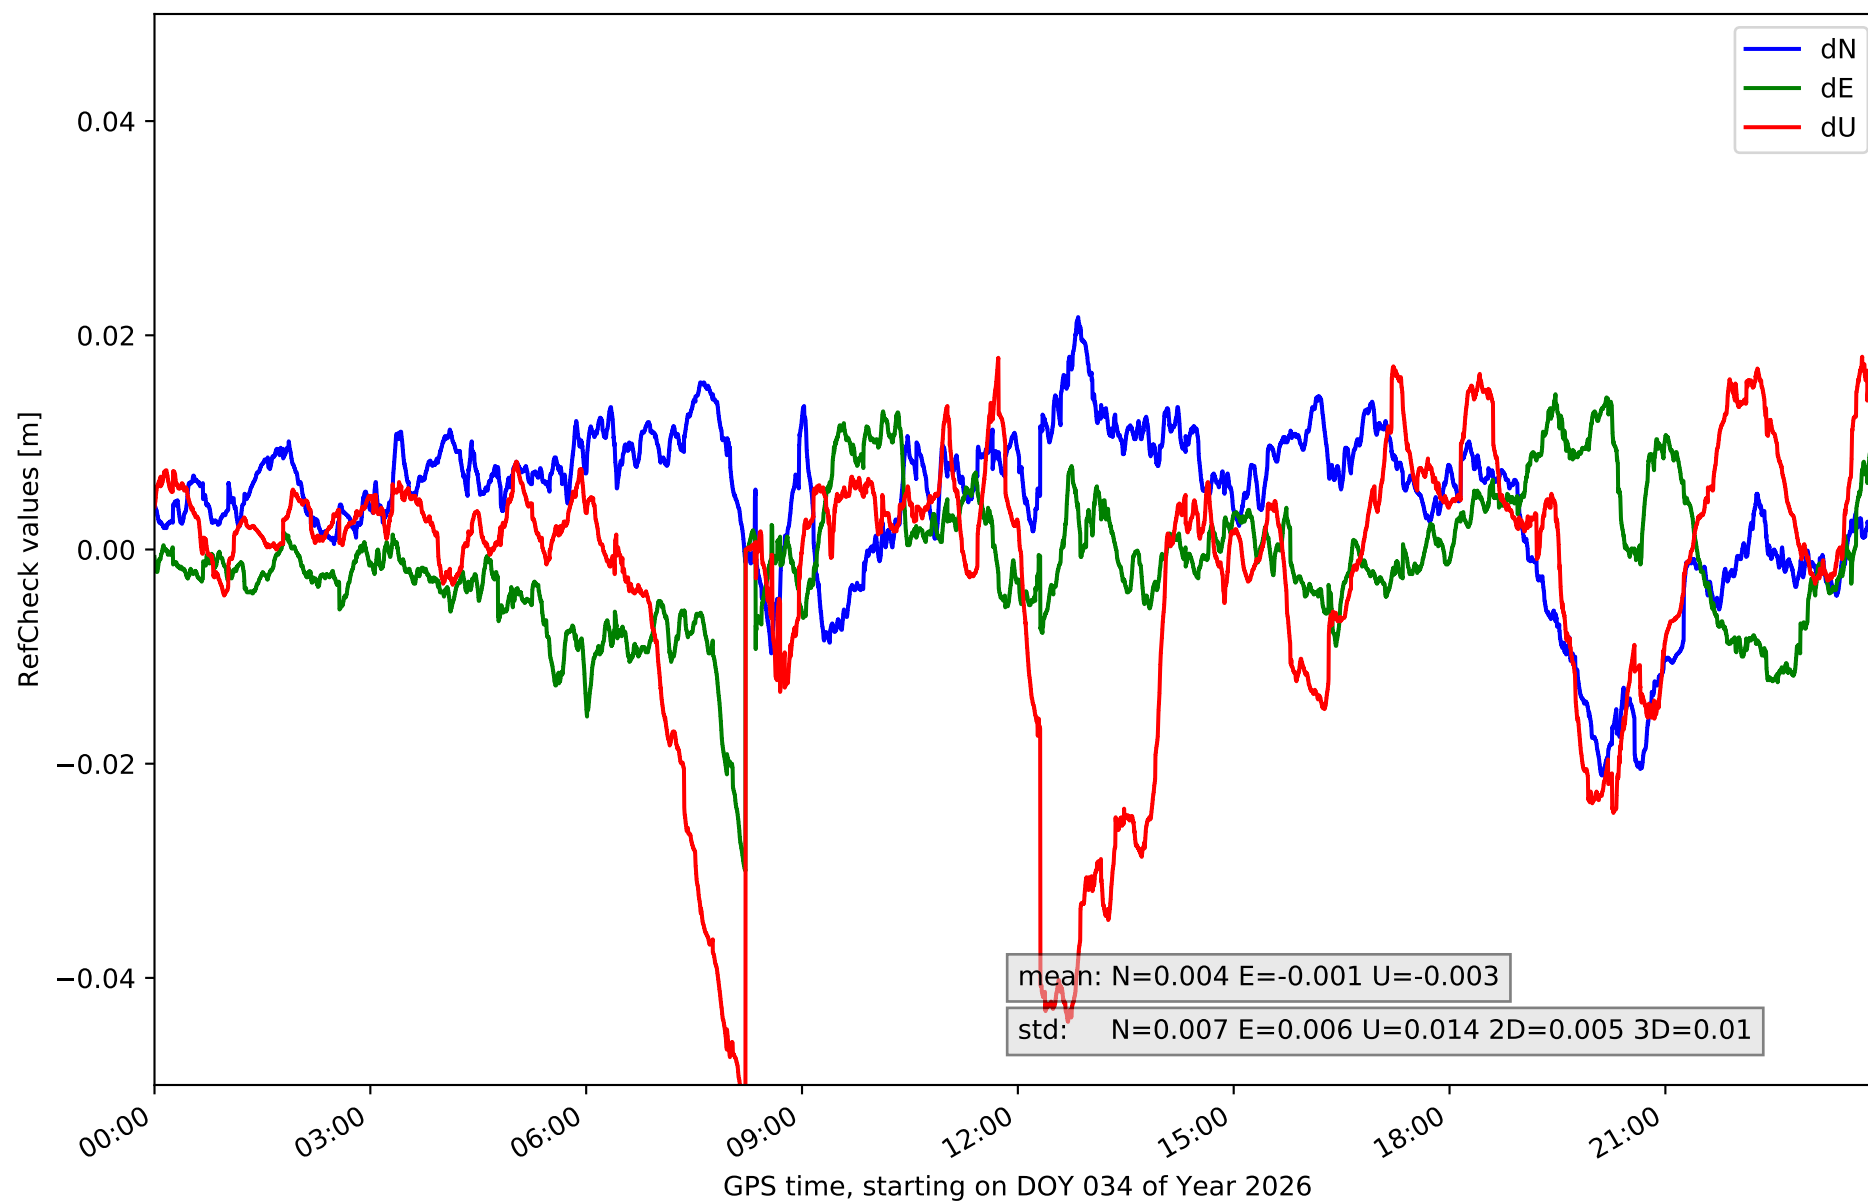


RefCheck for station LZ02 in network NT31

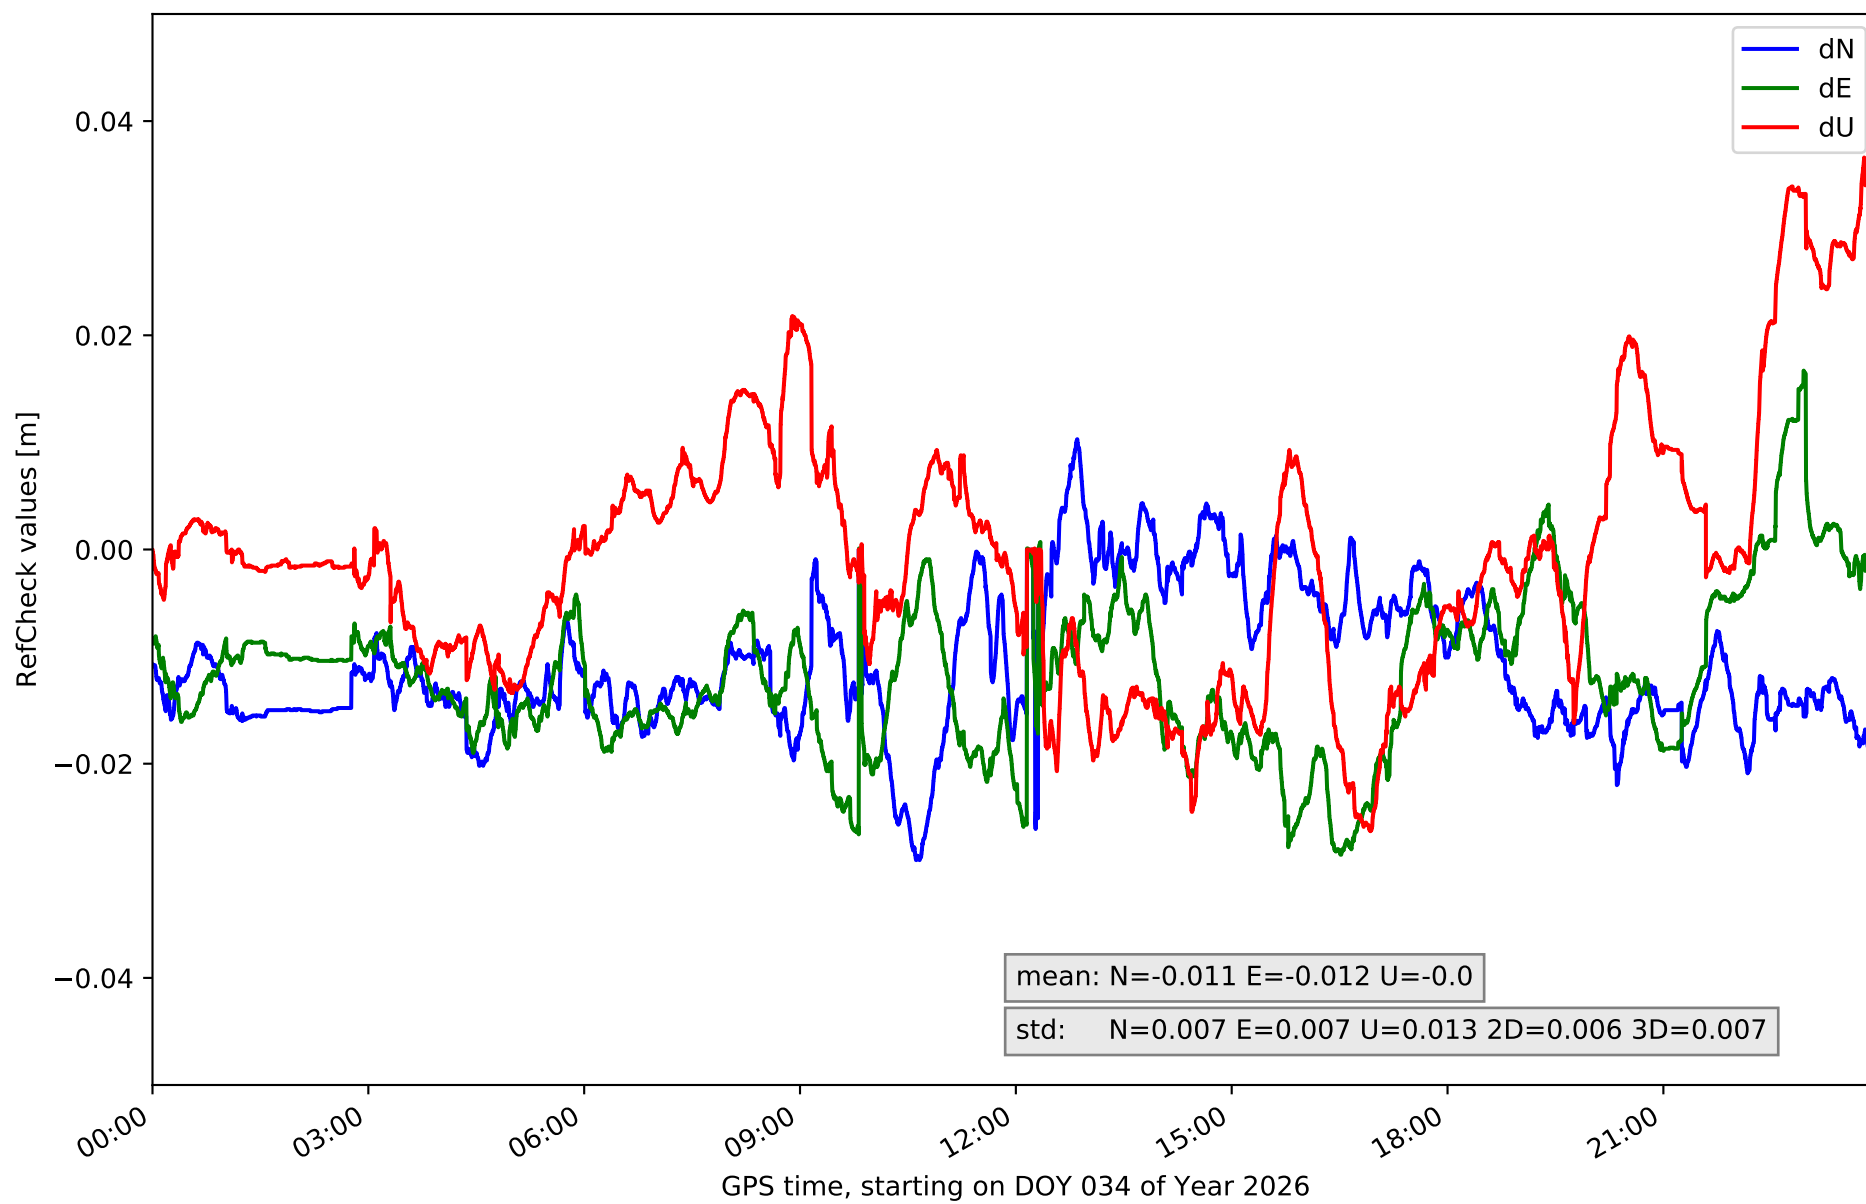


RefCheck for station LZ03 in network NT31

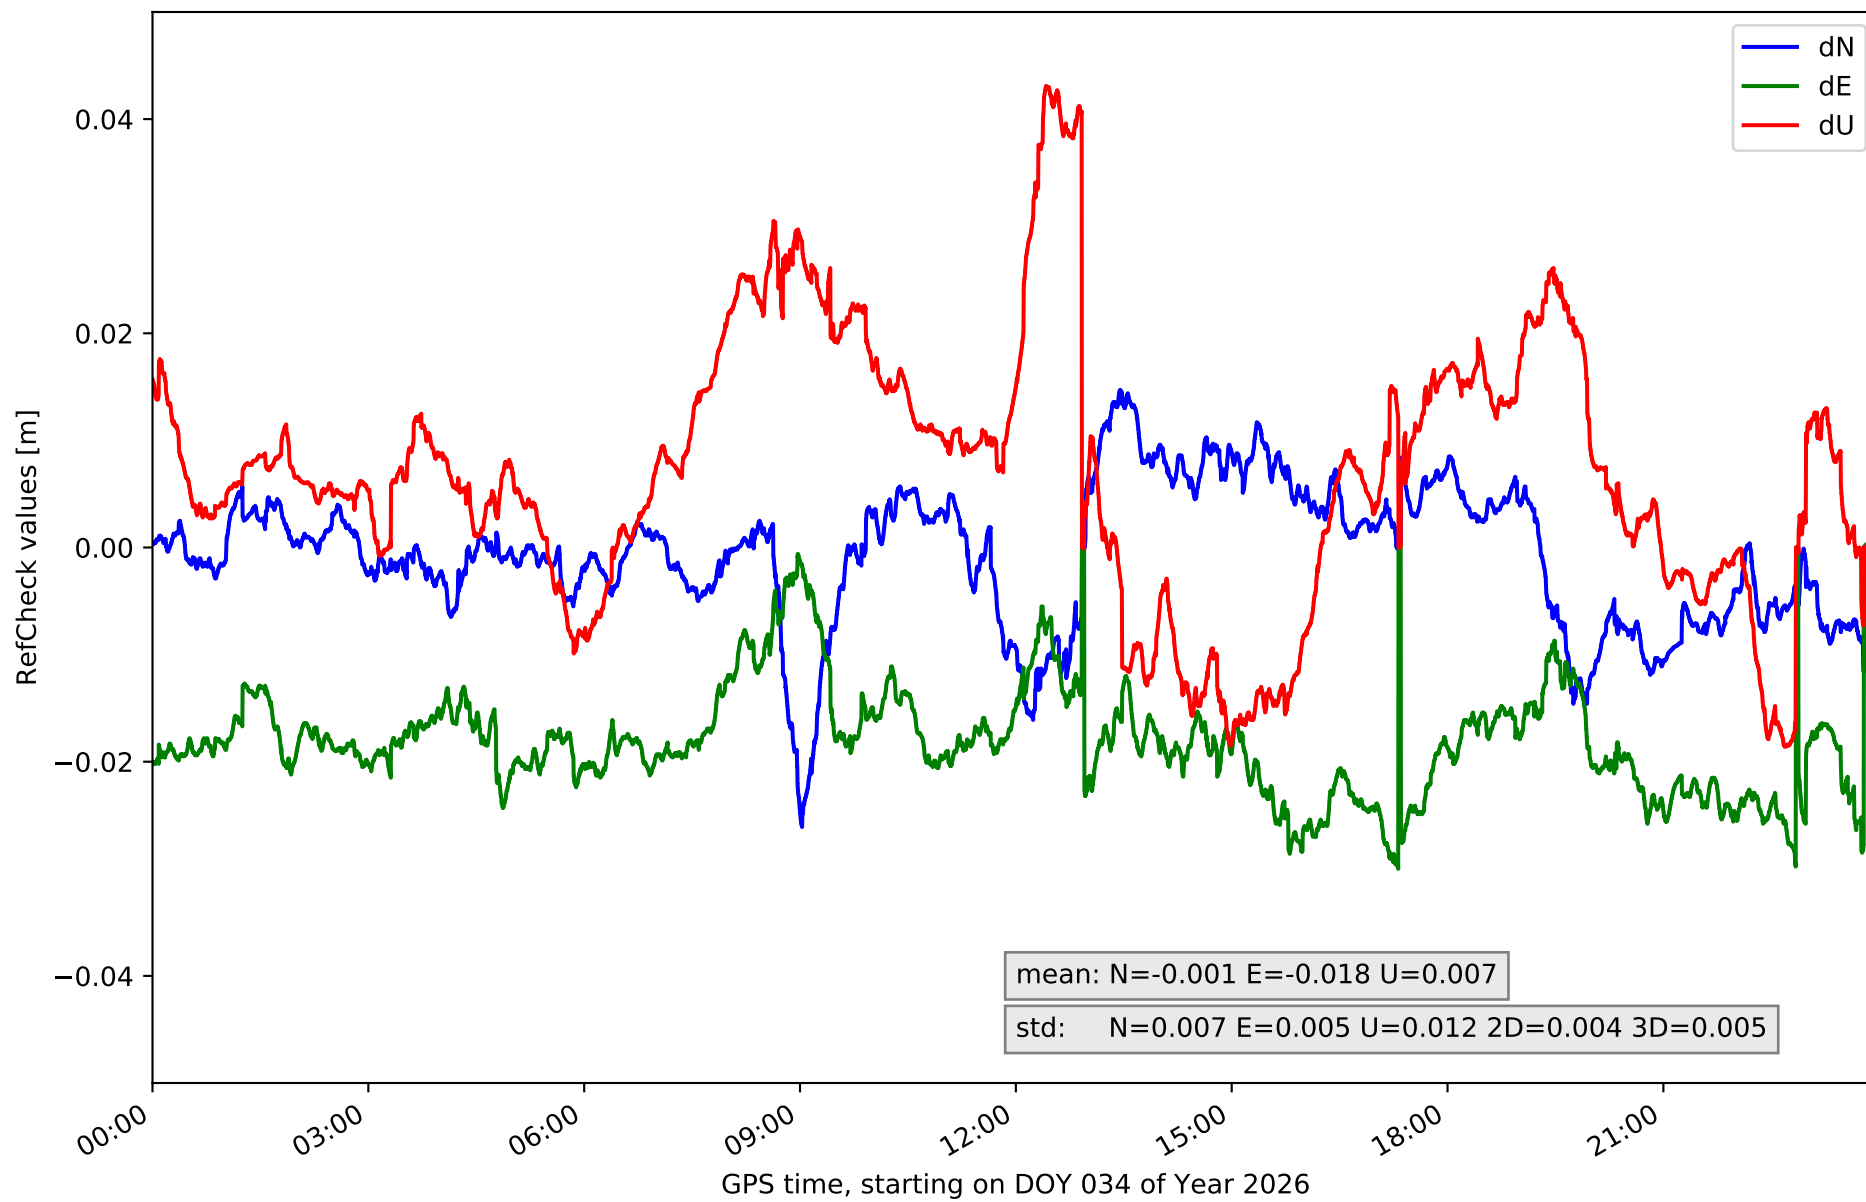

RefCheck for station MASP in network NT31

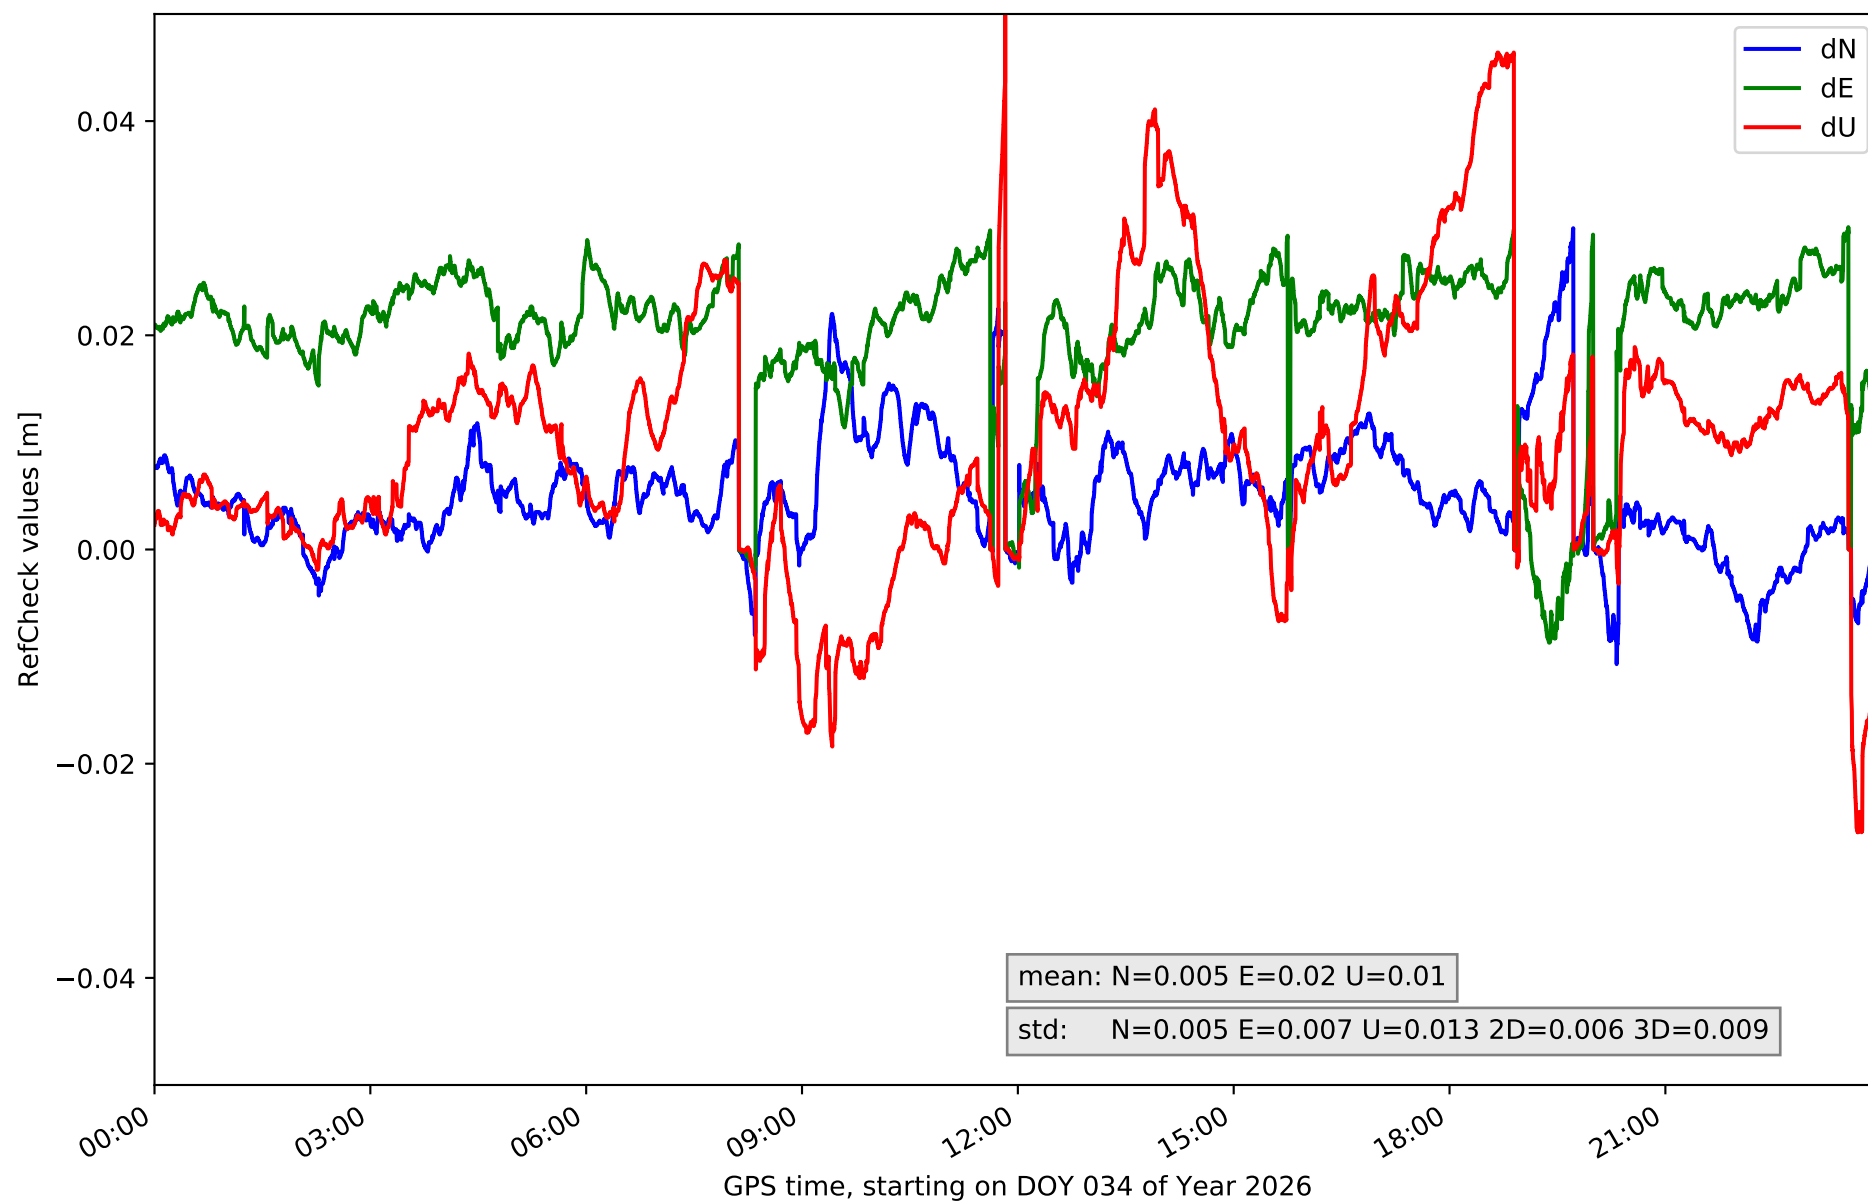

RefCheck for station ULP2 in network NT31

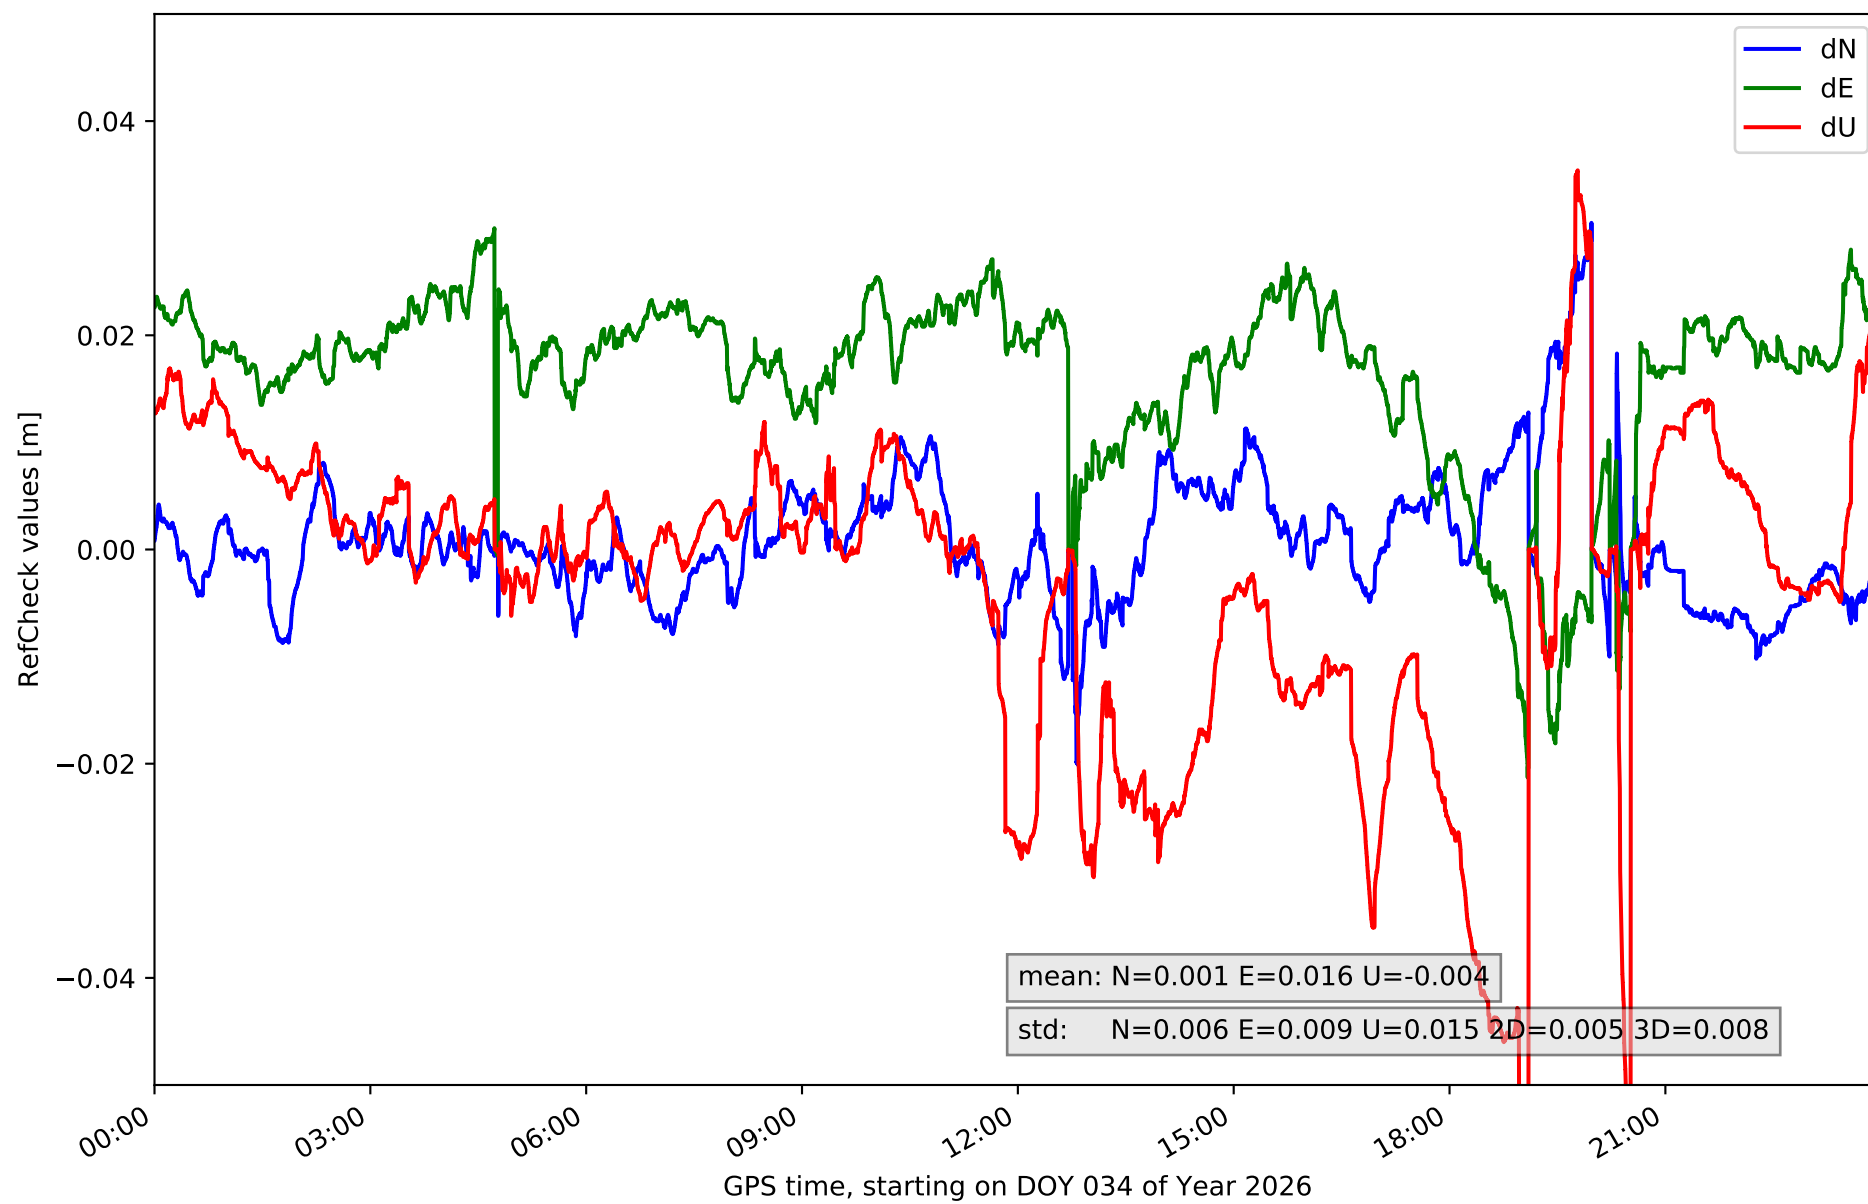

RefCheck values for network NT31

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
FUER	-0.015	0.025	0.007	-0.024	0.01	0.006	-0.06	0.009	0.012	0.006	0.011	44006	54.7	23191	28.8
LALA	-0.021	0.022	0.007	-0.03	0.015	0.006	-0.053	0.03	0.014	0.005	0.01	34069	42.3	13944	17.3
LZ02	-0.029	0.01	0.007	-0.029	0.017	0.007	-0.026	0.055	0.013	0.006	0.007	72239	89.8	45350	56.4
LZ03	-0.026	0.02	0.007	-0.03	0.0	0.005	-0.027	0.043	0.012	0.004	0.005	78331	97.4	64865	80.6
MASP	-0.011	0.03	0.005	-0.009	0.03	0.007	-0.026	0.073	0.013	0.006	0.009	75855	94.3	70284	87.4
ULP2	-0.02	0.03	0.006	-0.021	0.03	0.009	-0.06	0.035	0.015	0.005	0.008	73251	91.1	53703	66.8
Mean	-0.02	0.023	0.006	-0.024	0.017	0.007	-0.042	0.041	0.013	0.005	0.008	62958.5	78.3	45222.8	56.2
Min/Max	-0.029	0.03	0.007	-0.03	0.03	0.009	-0.06	0.073	0.015	0.006	0.011	78331	97.4	70284	87.4

fixing statistic for network NT31

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	92.5	93.5	86.6	95.4	93.1
considering satellites with dual-frequency fixed	86.8	85.7	80.6	91.0	89.8
considering all signals separately	86.5	84.8	80.6	91.4	85.8