

summary for network N32T

timeperiod chosen: from 2026-01-04-00:00:00 until 2026-01-04-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.2 seconds


average fixing percentage with threshold set to 0.3: 89.4 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: LEICA GR50	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

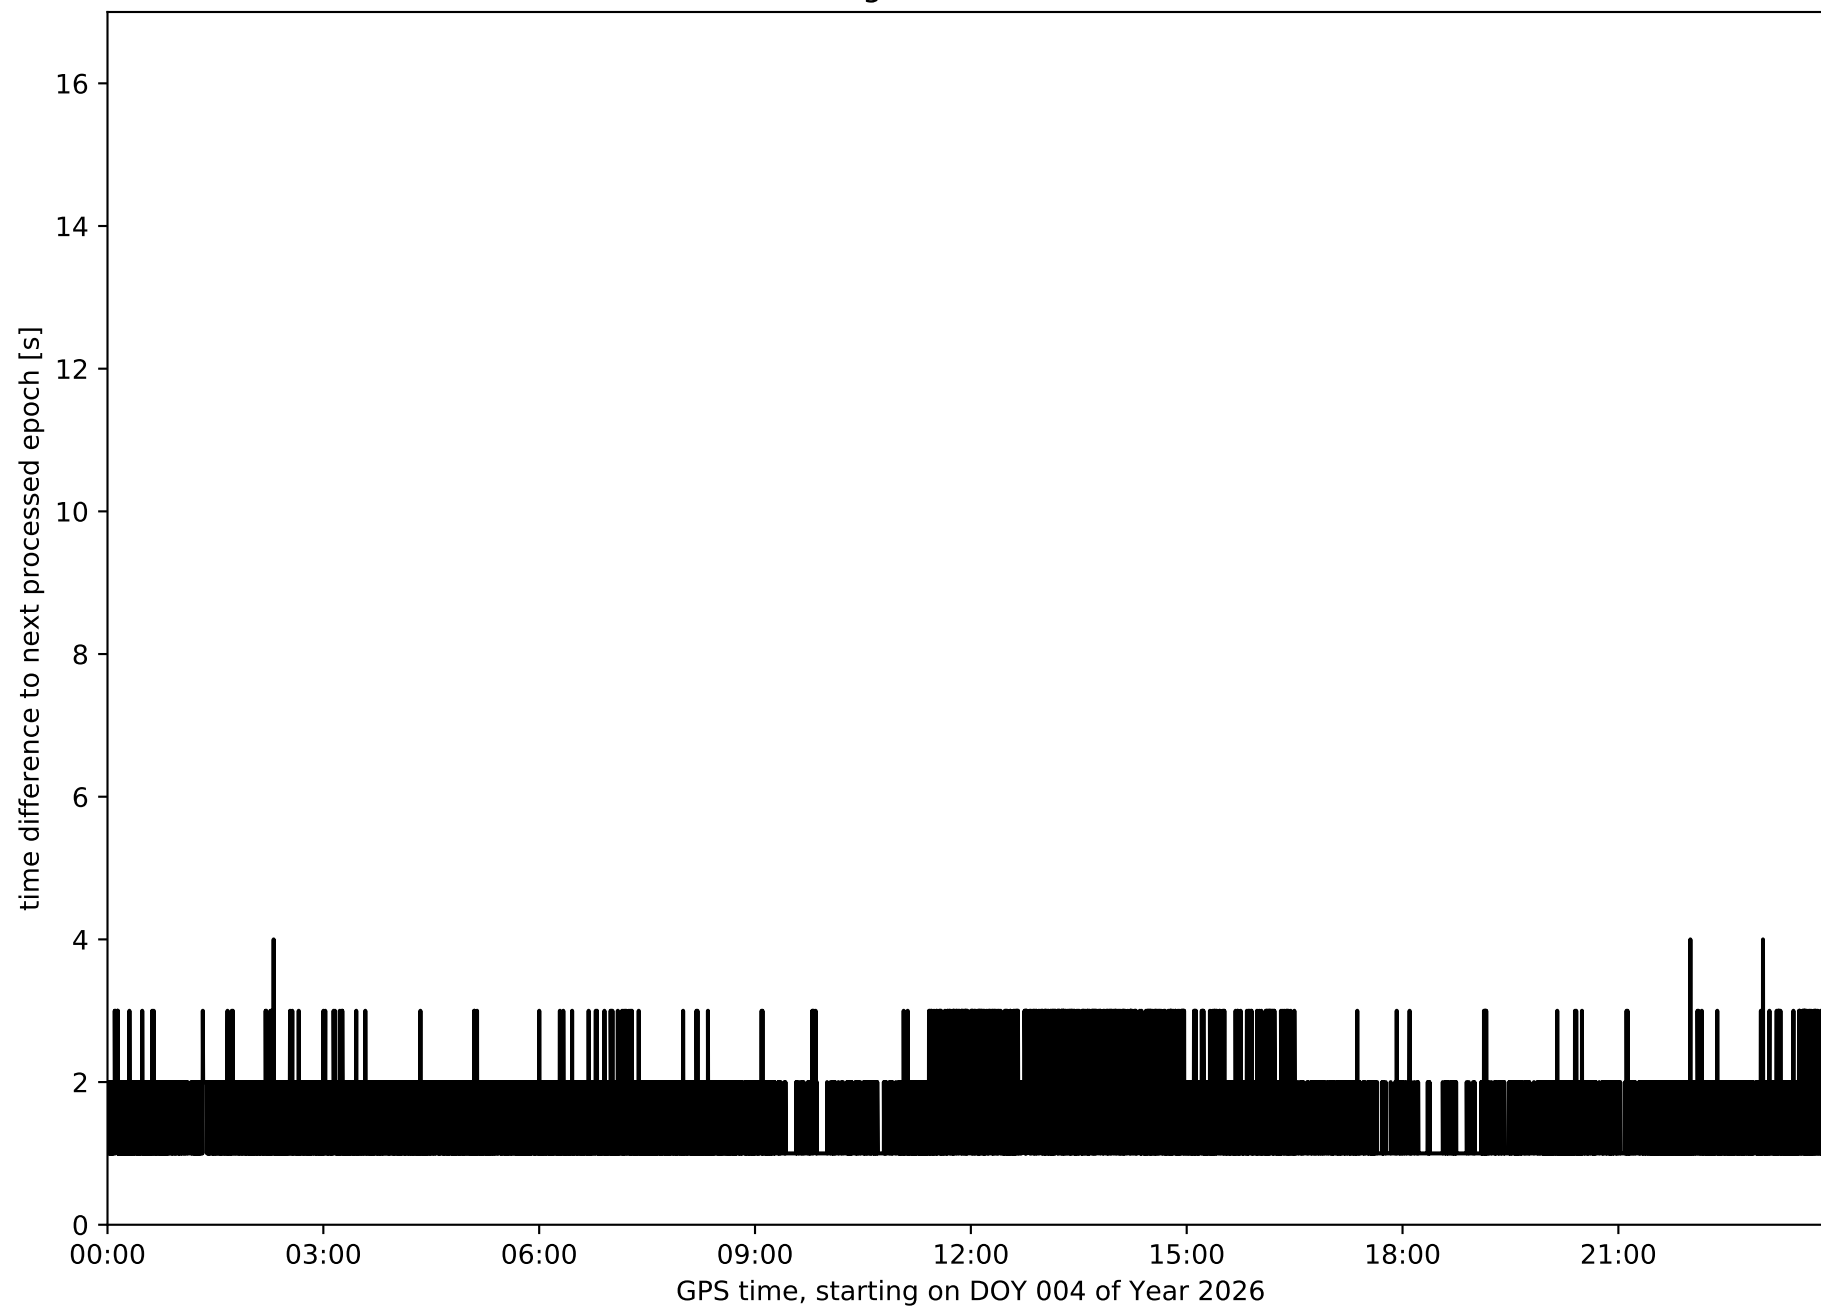


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

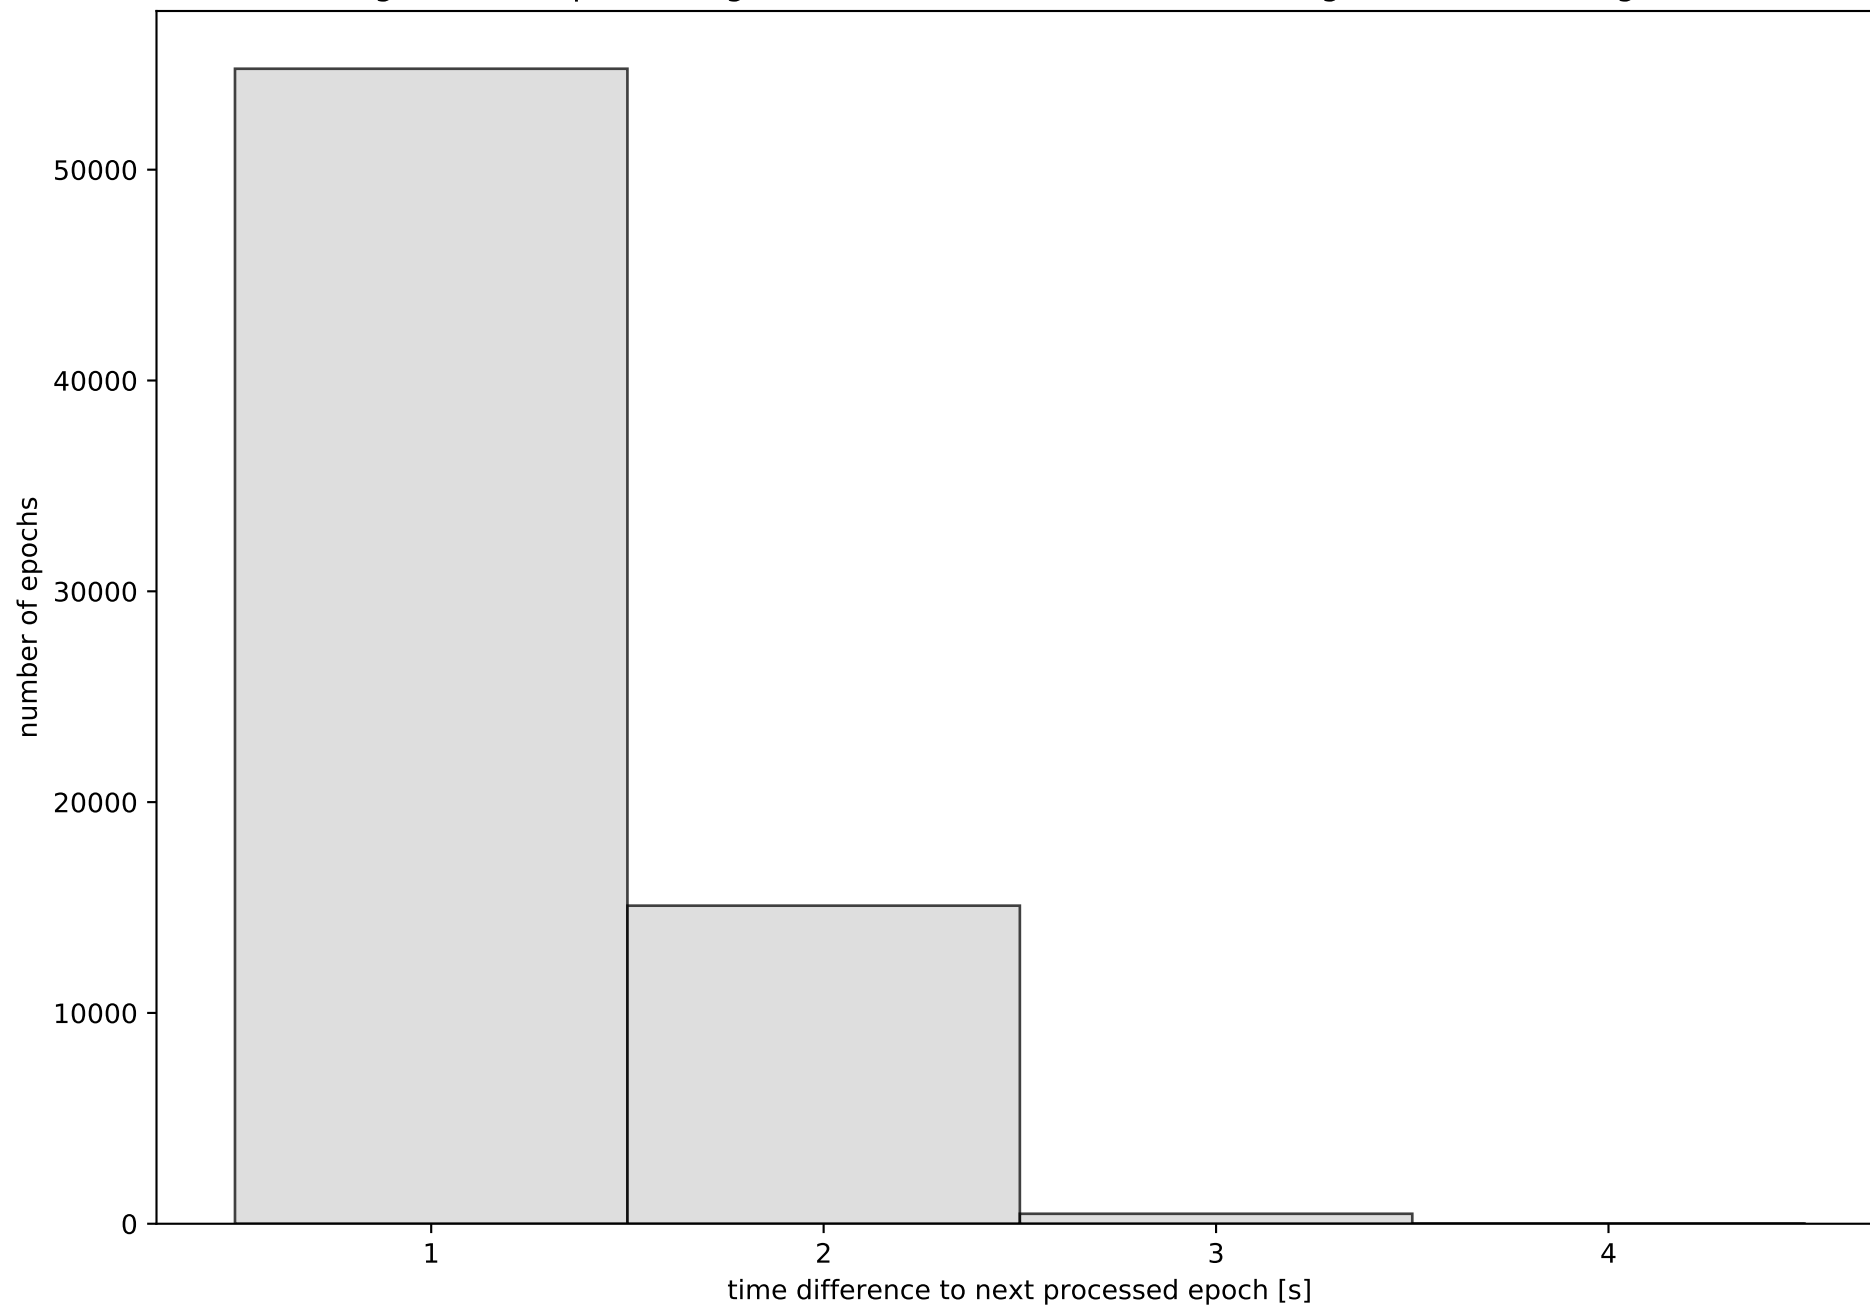


Network N32T with threshold set to 0.3

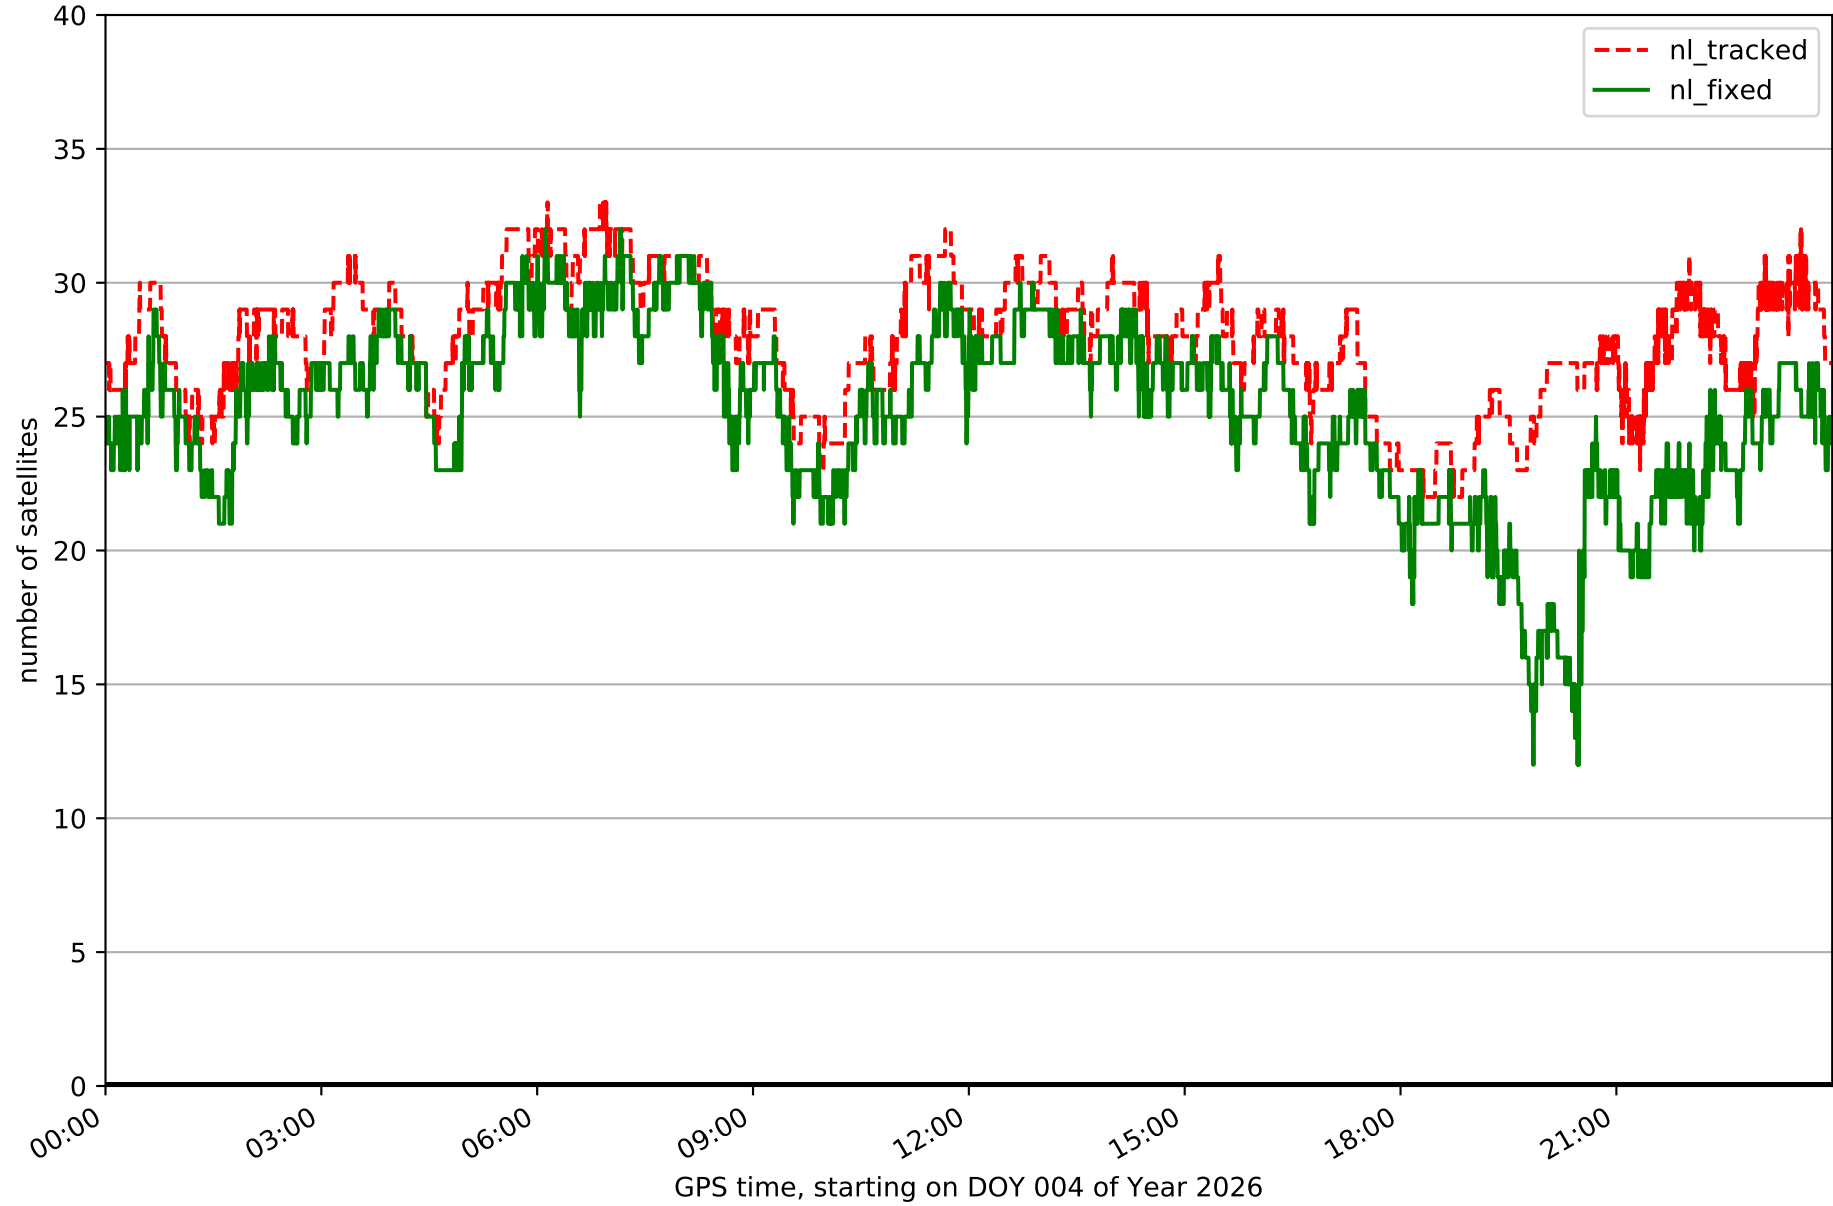


Fixing percentage of satellites in network N32T with threshold set to 0.3

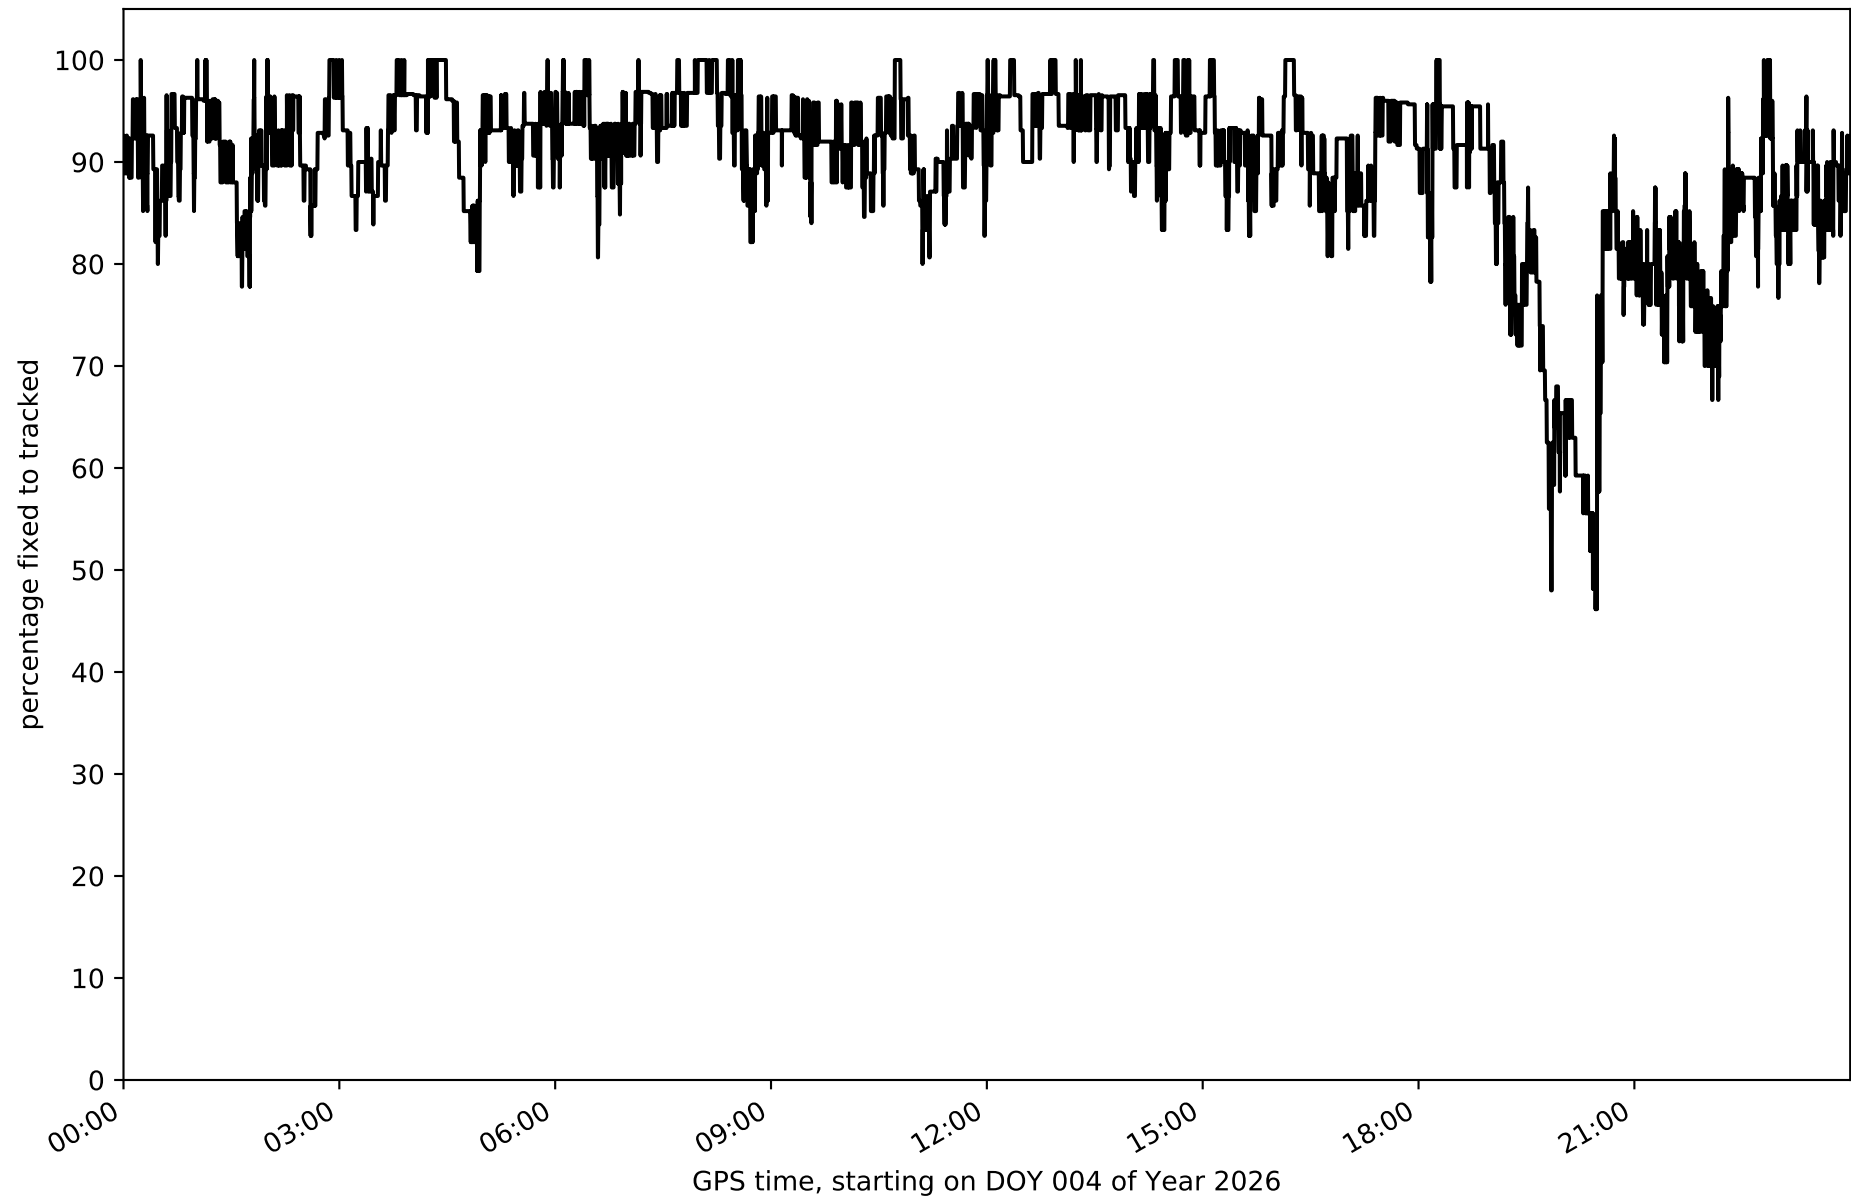


Network N32T - only GPS with threshold set to 0.3

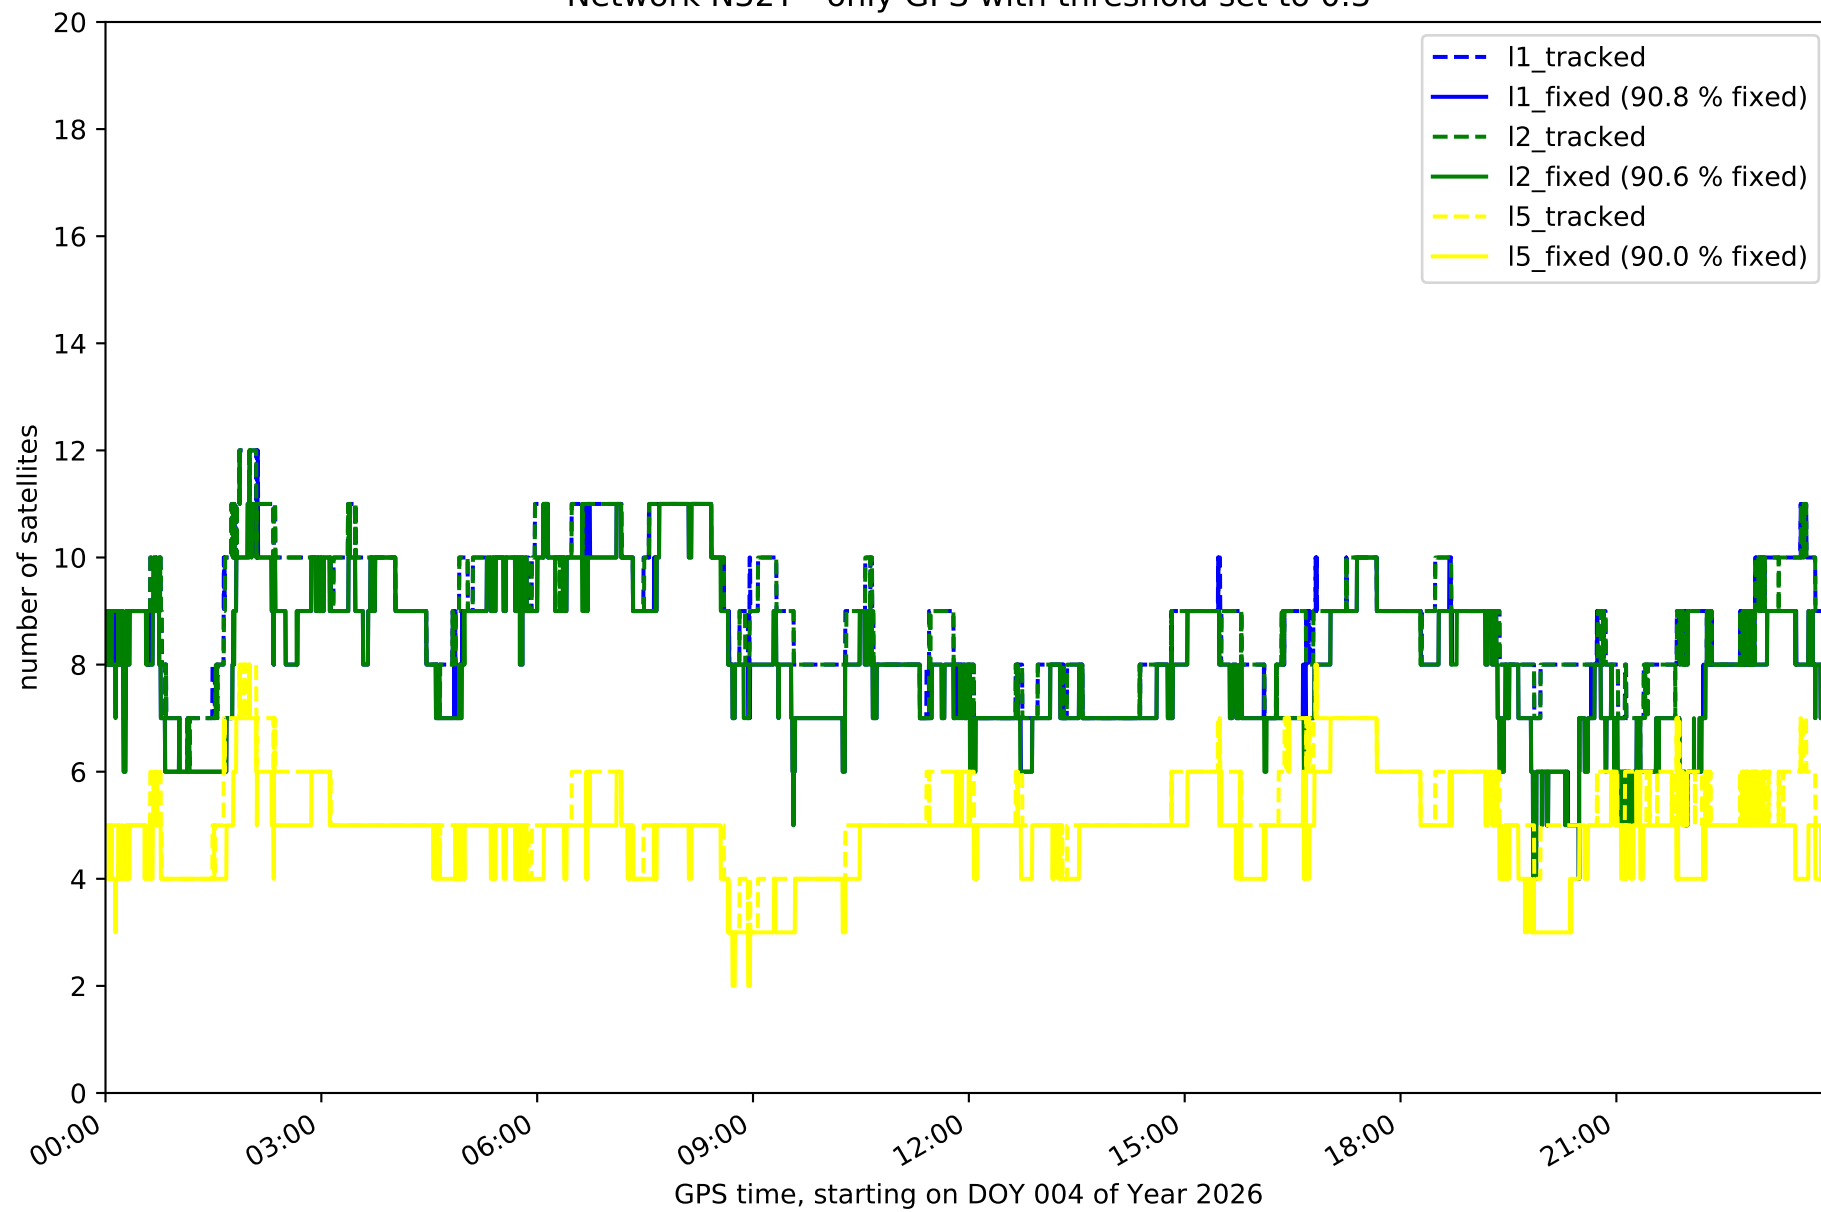


Network N32T - only GLONASS with threshold set to 0.3

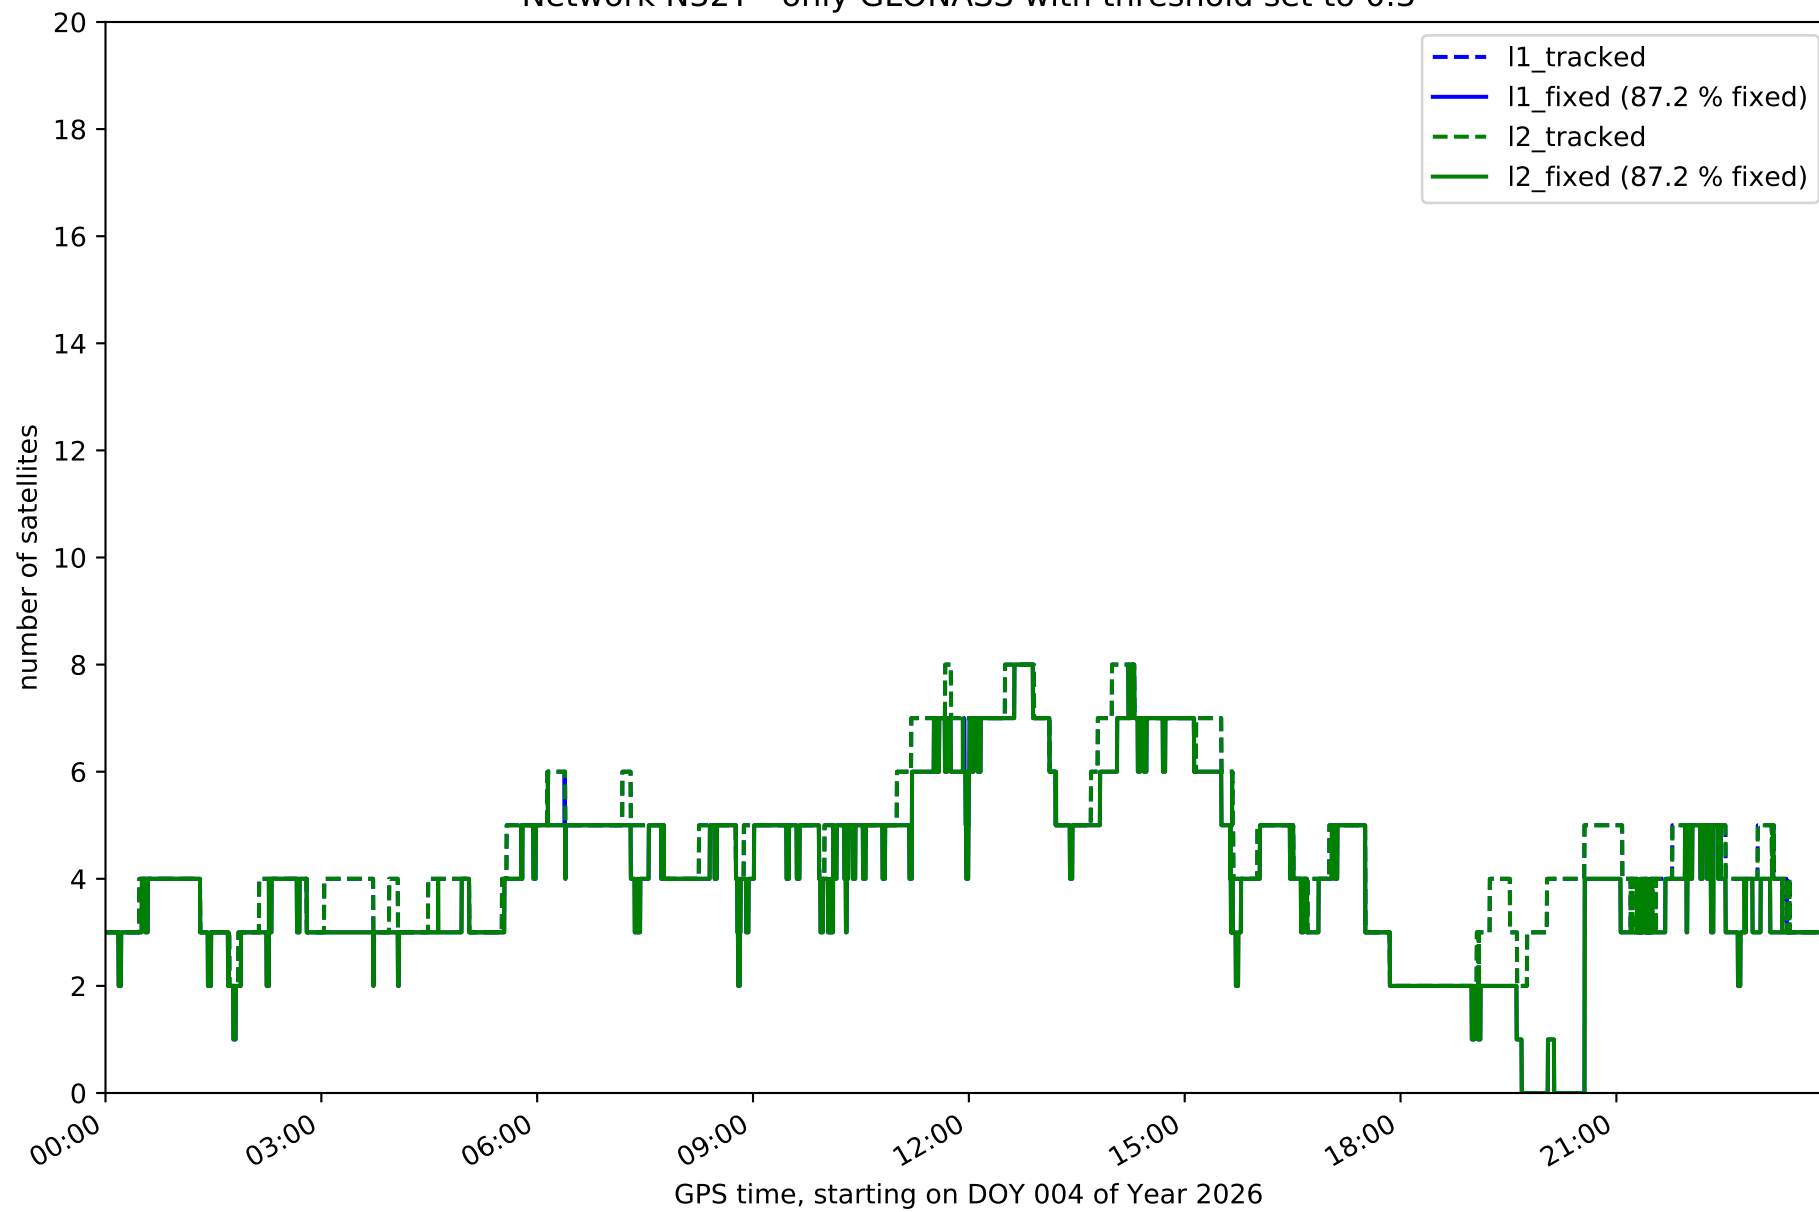


Network N32T - only BDS with threshold set to 0.3

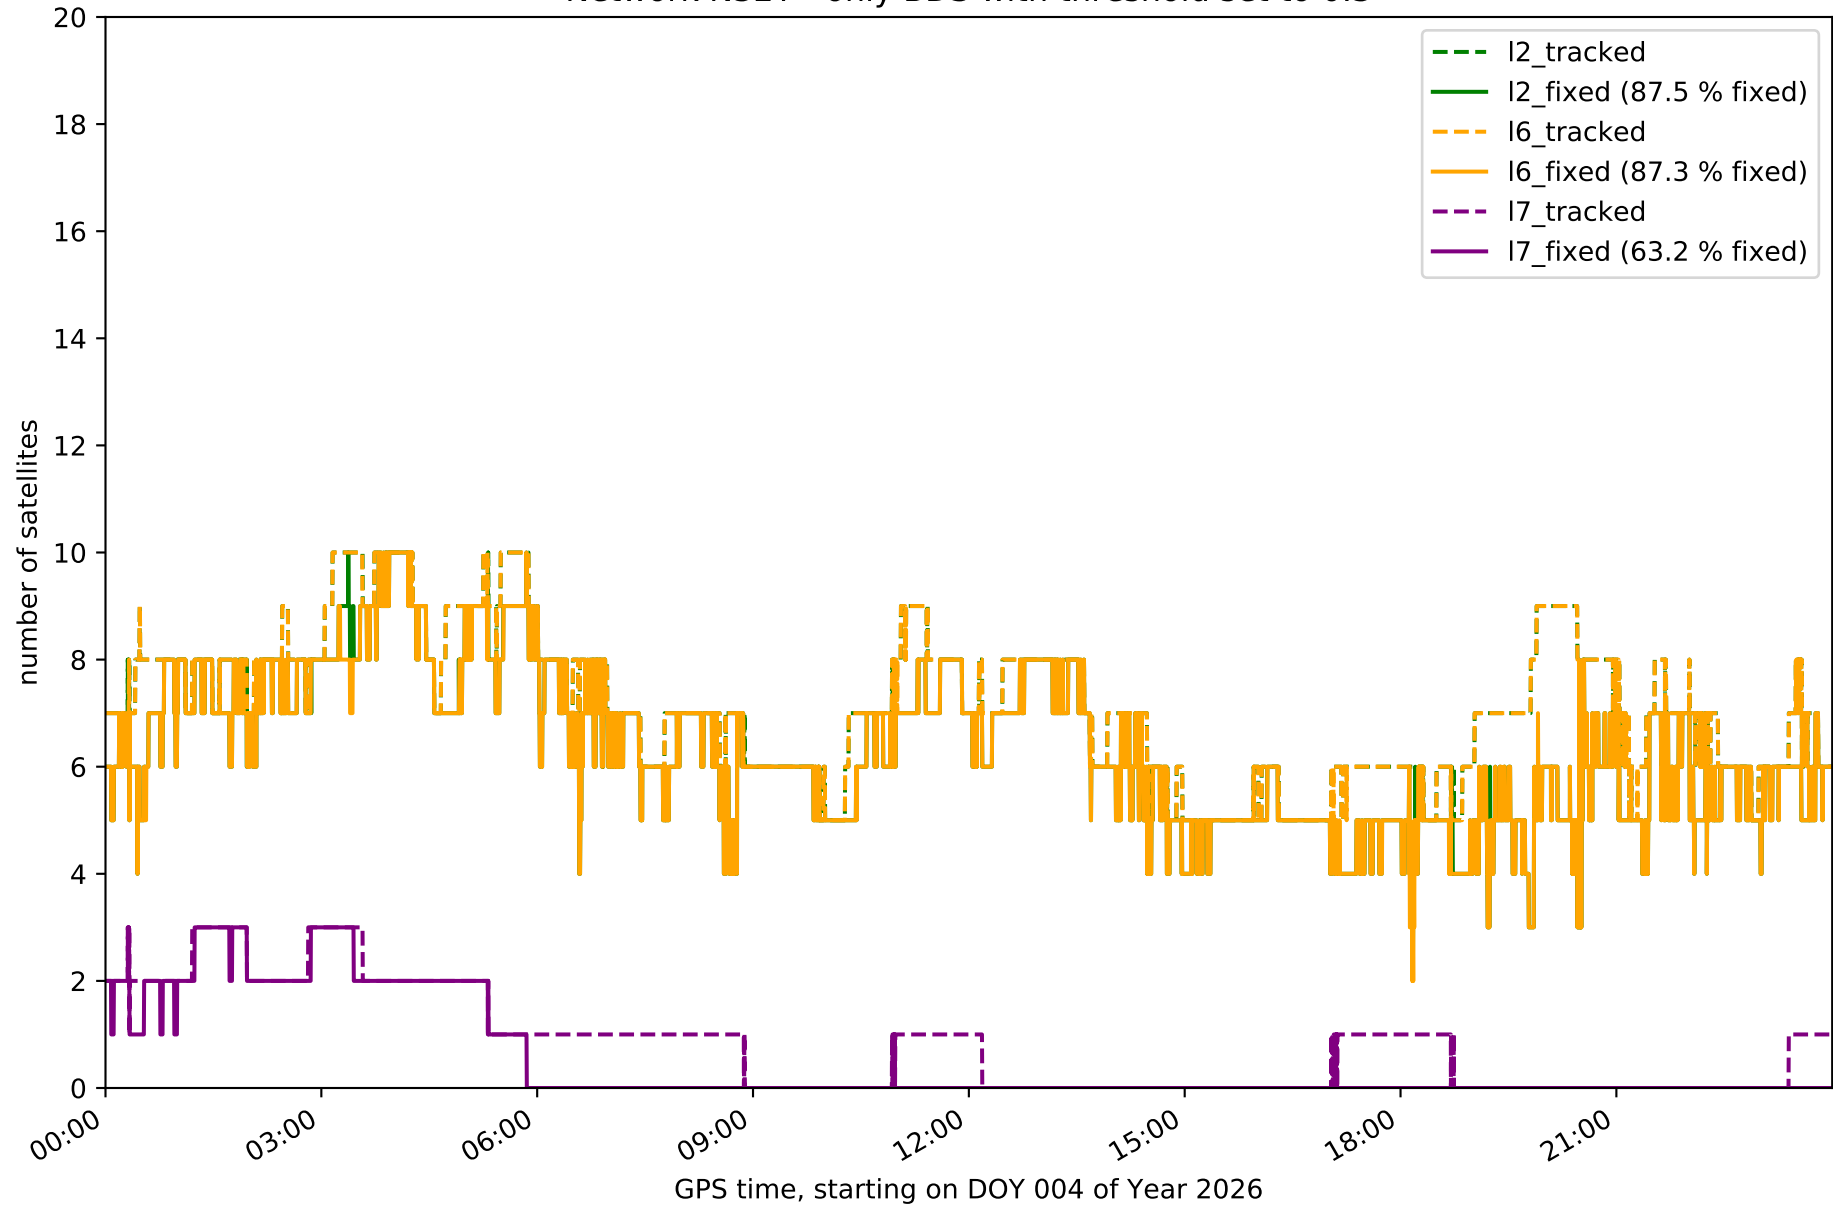


Network N32T - only Galileo with threshold set to 0.3

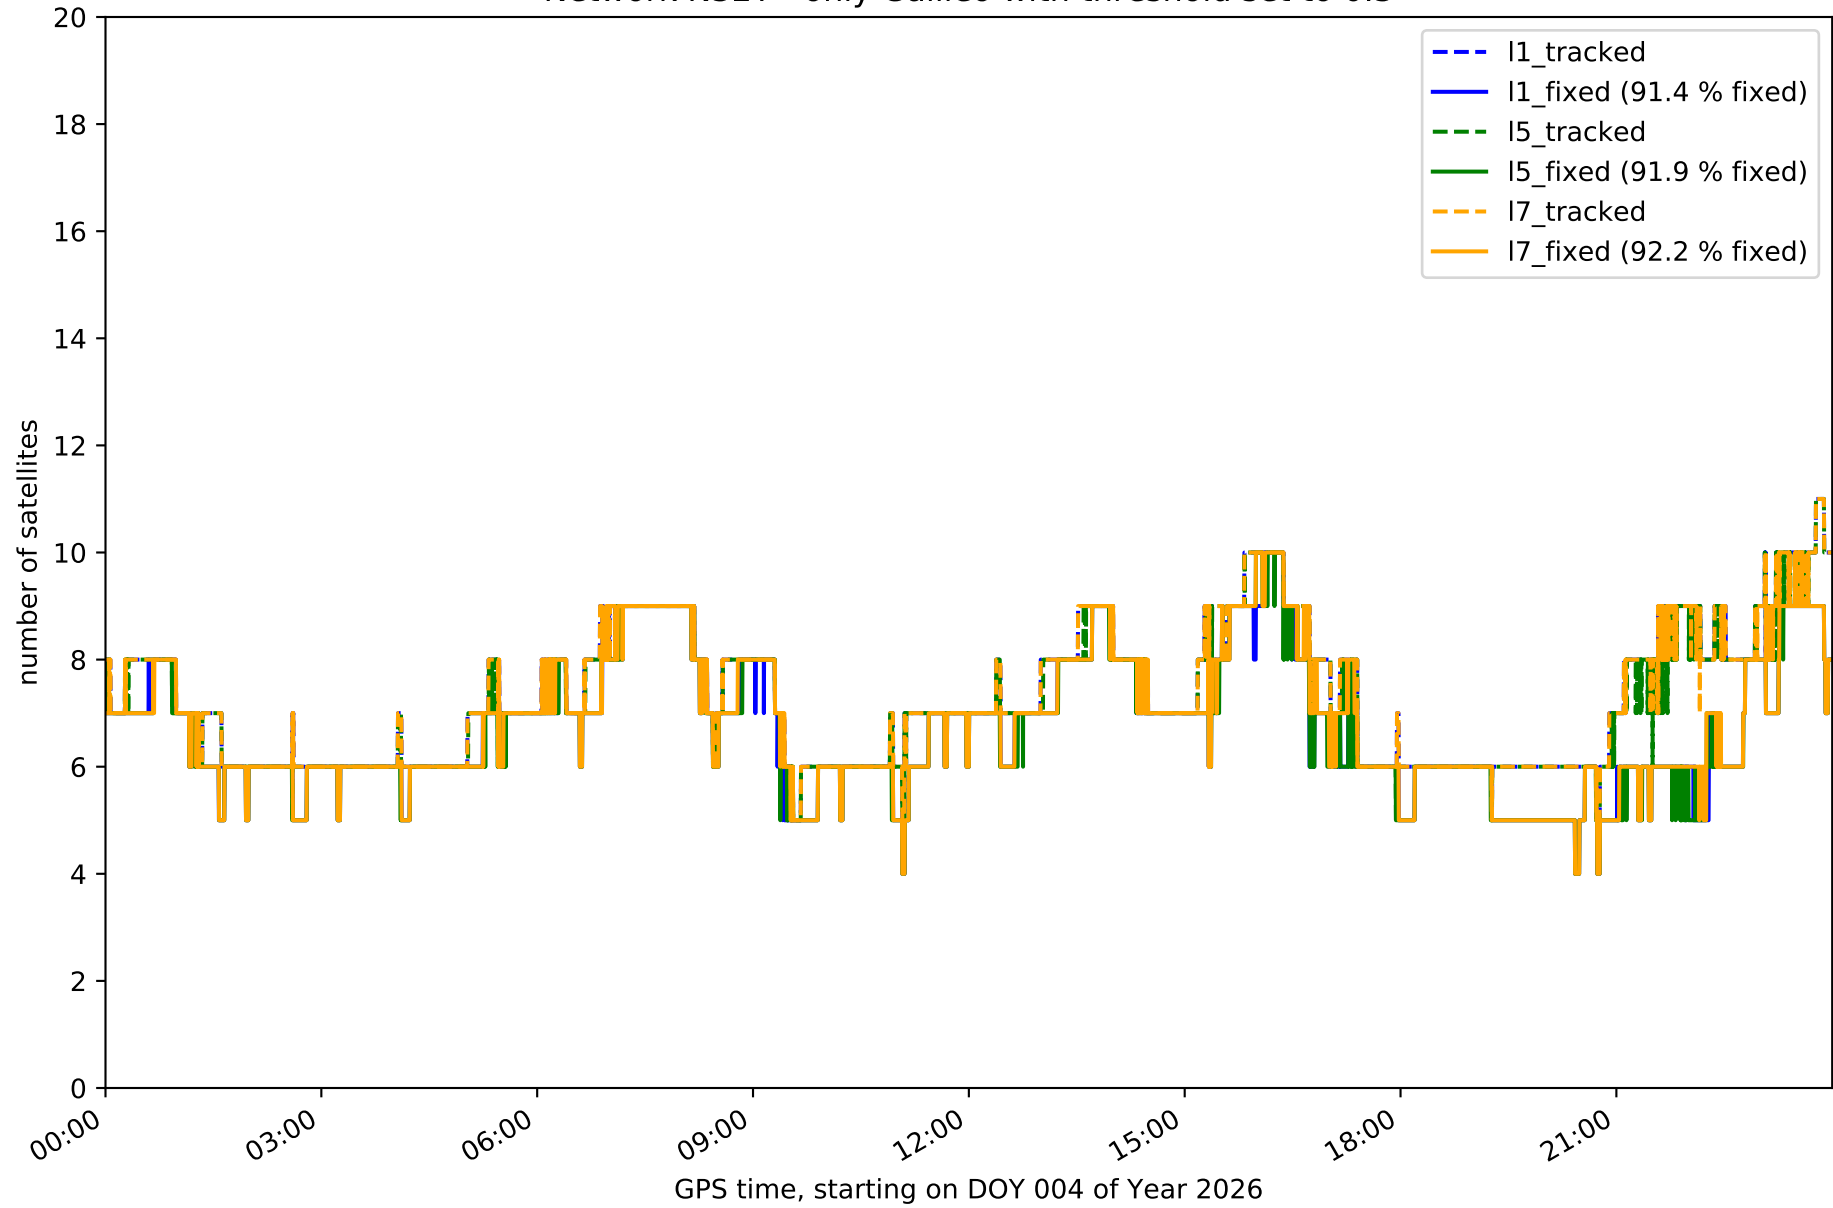


Station EH01 in network N32T

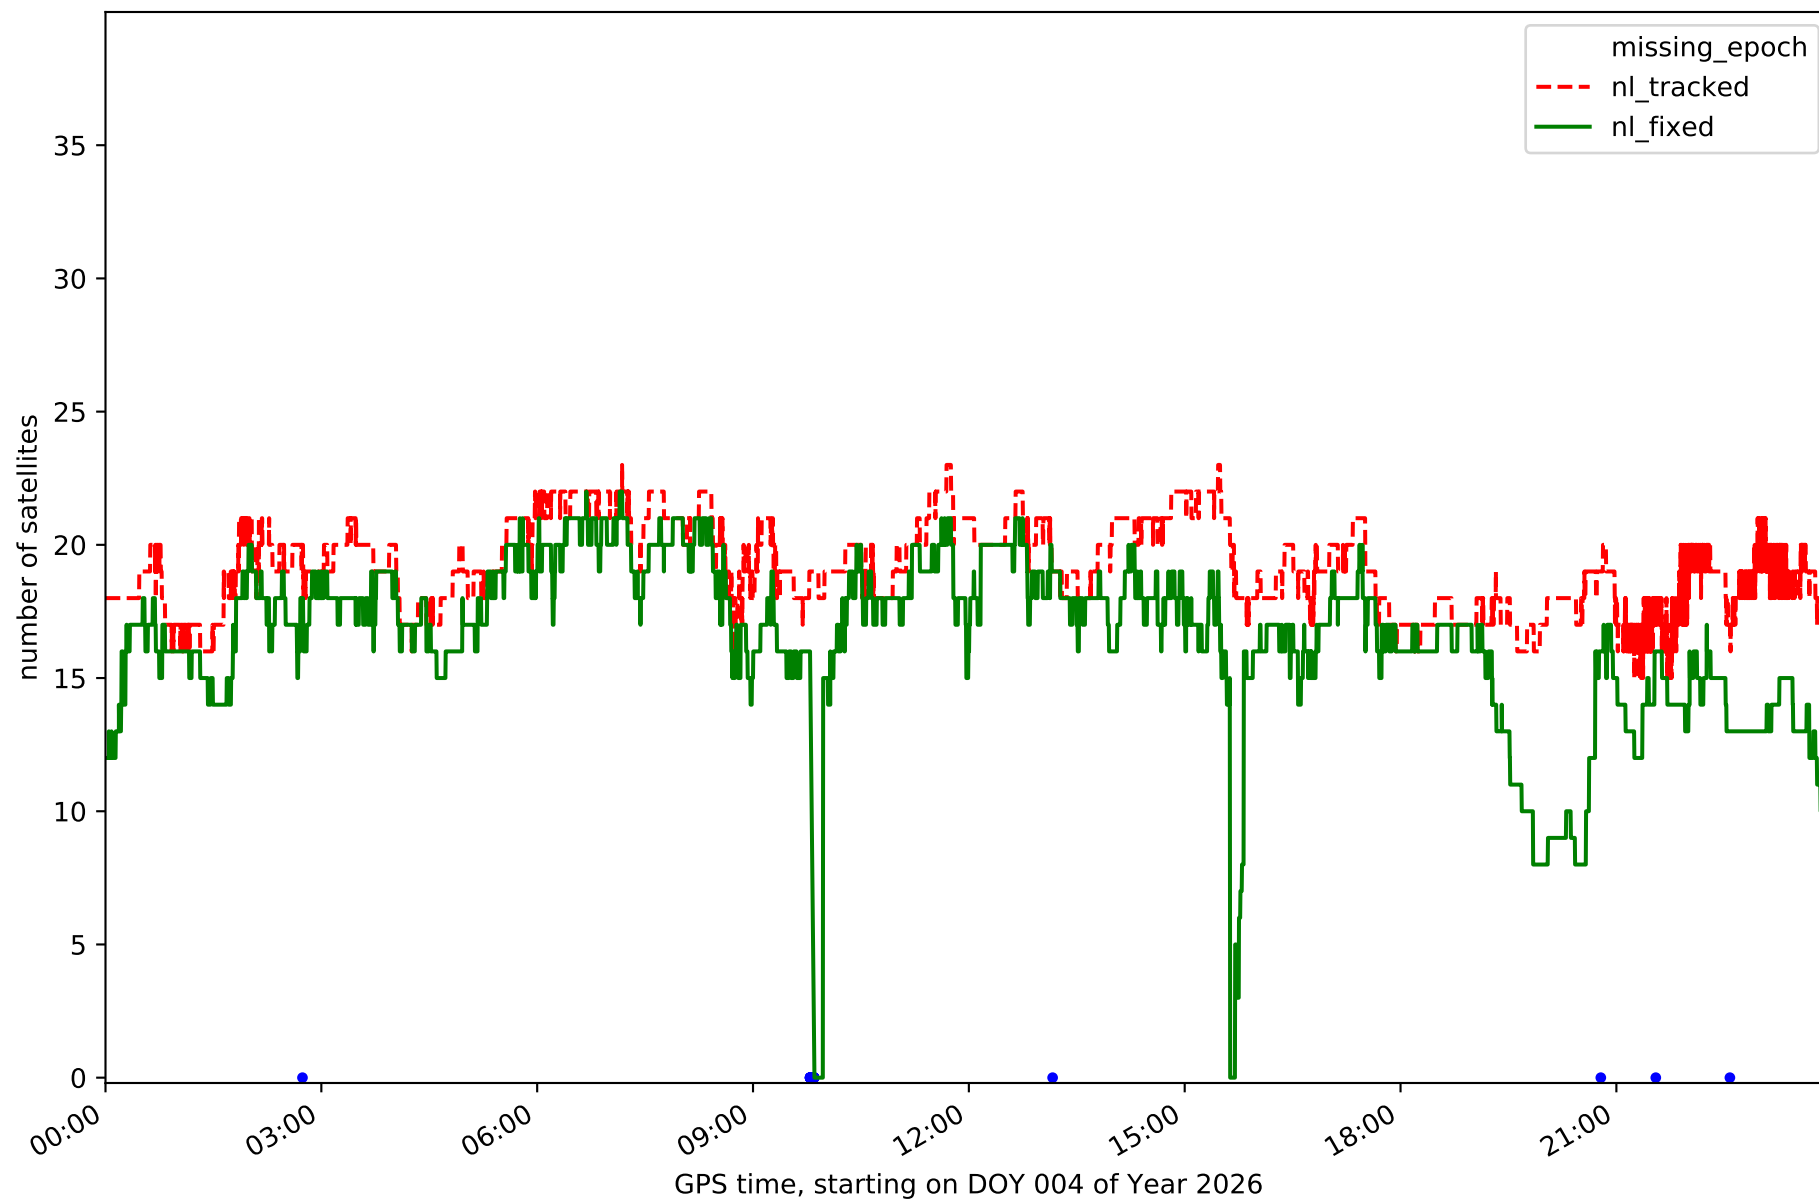


Station EH02 in network N32T

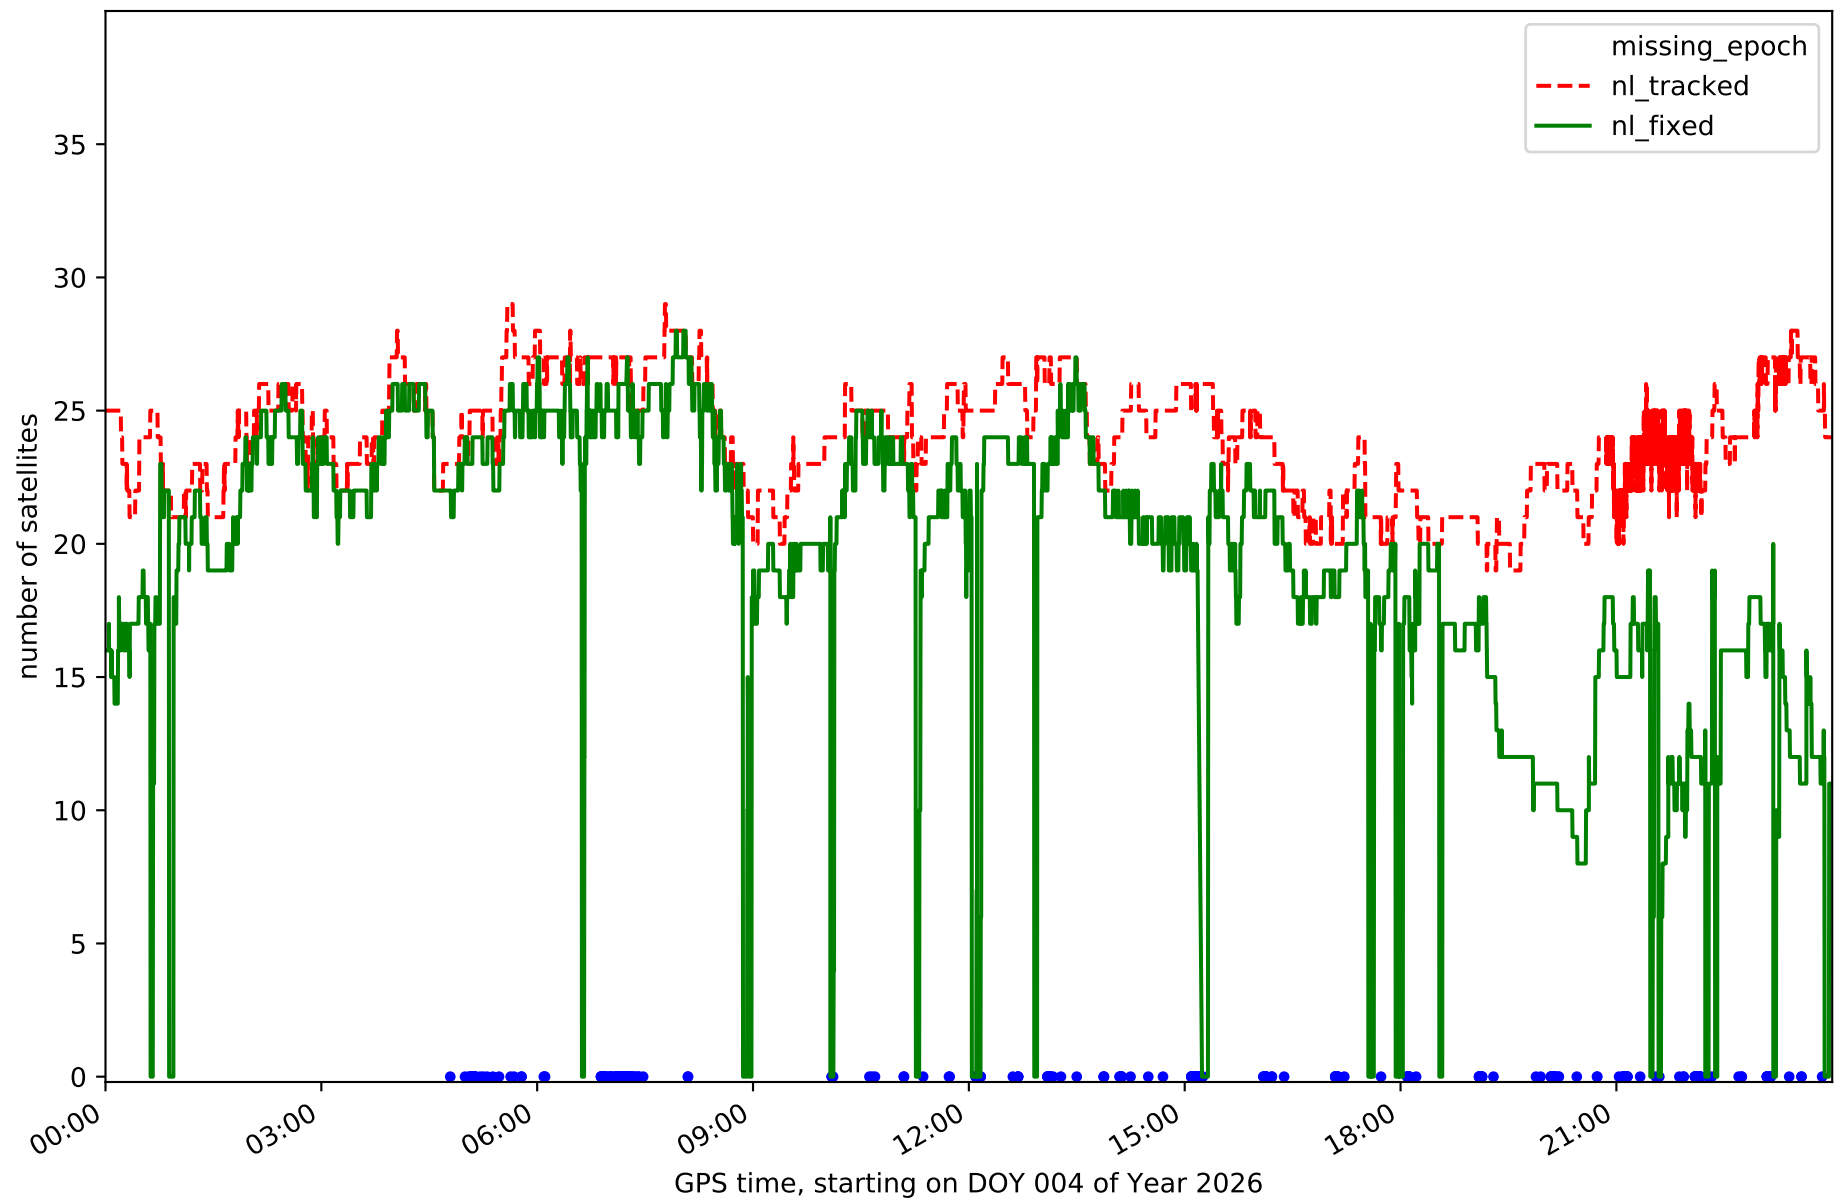


Station GOM1 in network N32T

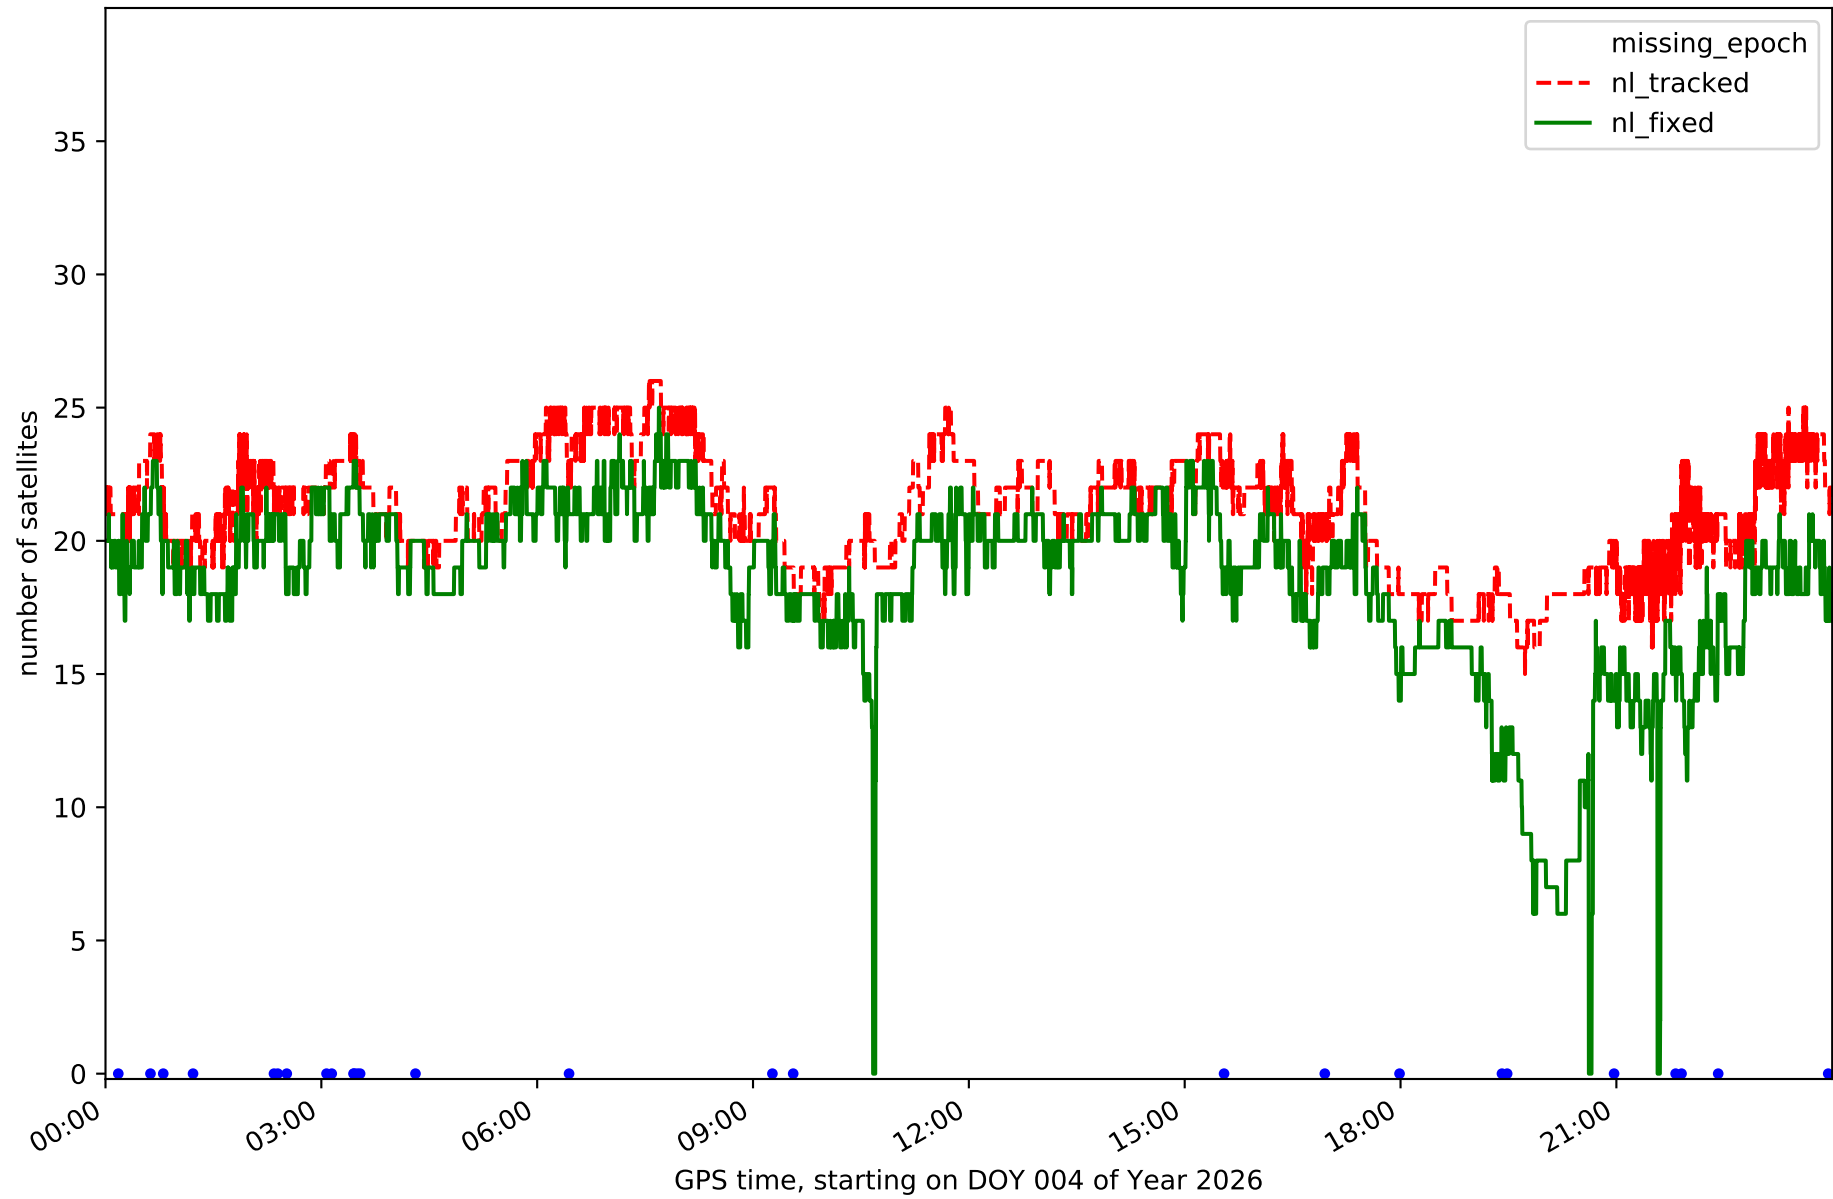


Station GOME in network N32T

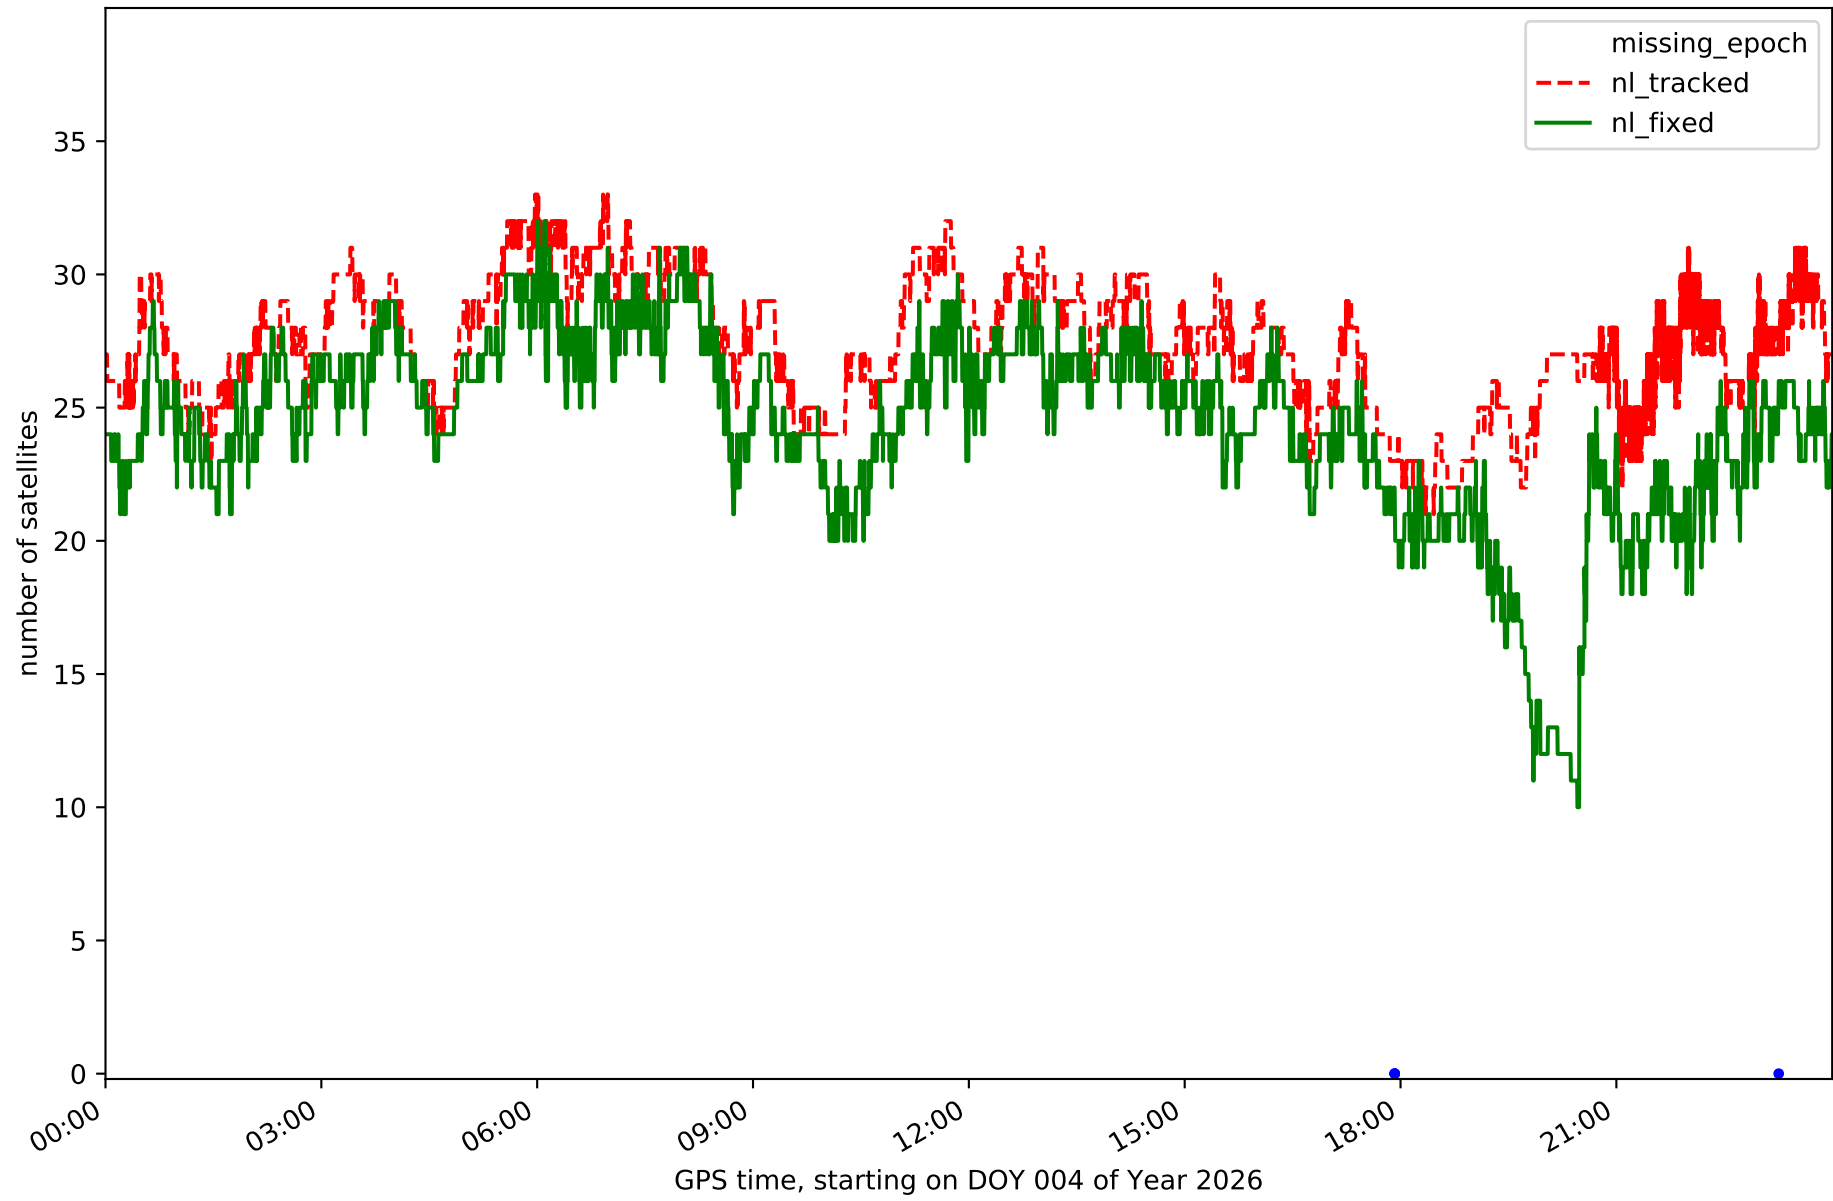


Station IZAN in network N32T

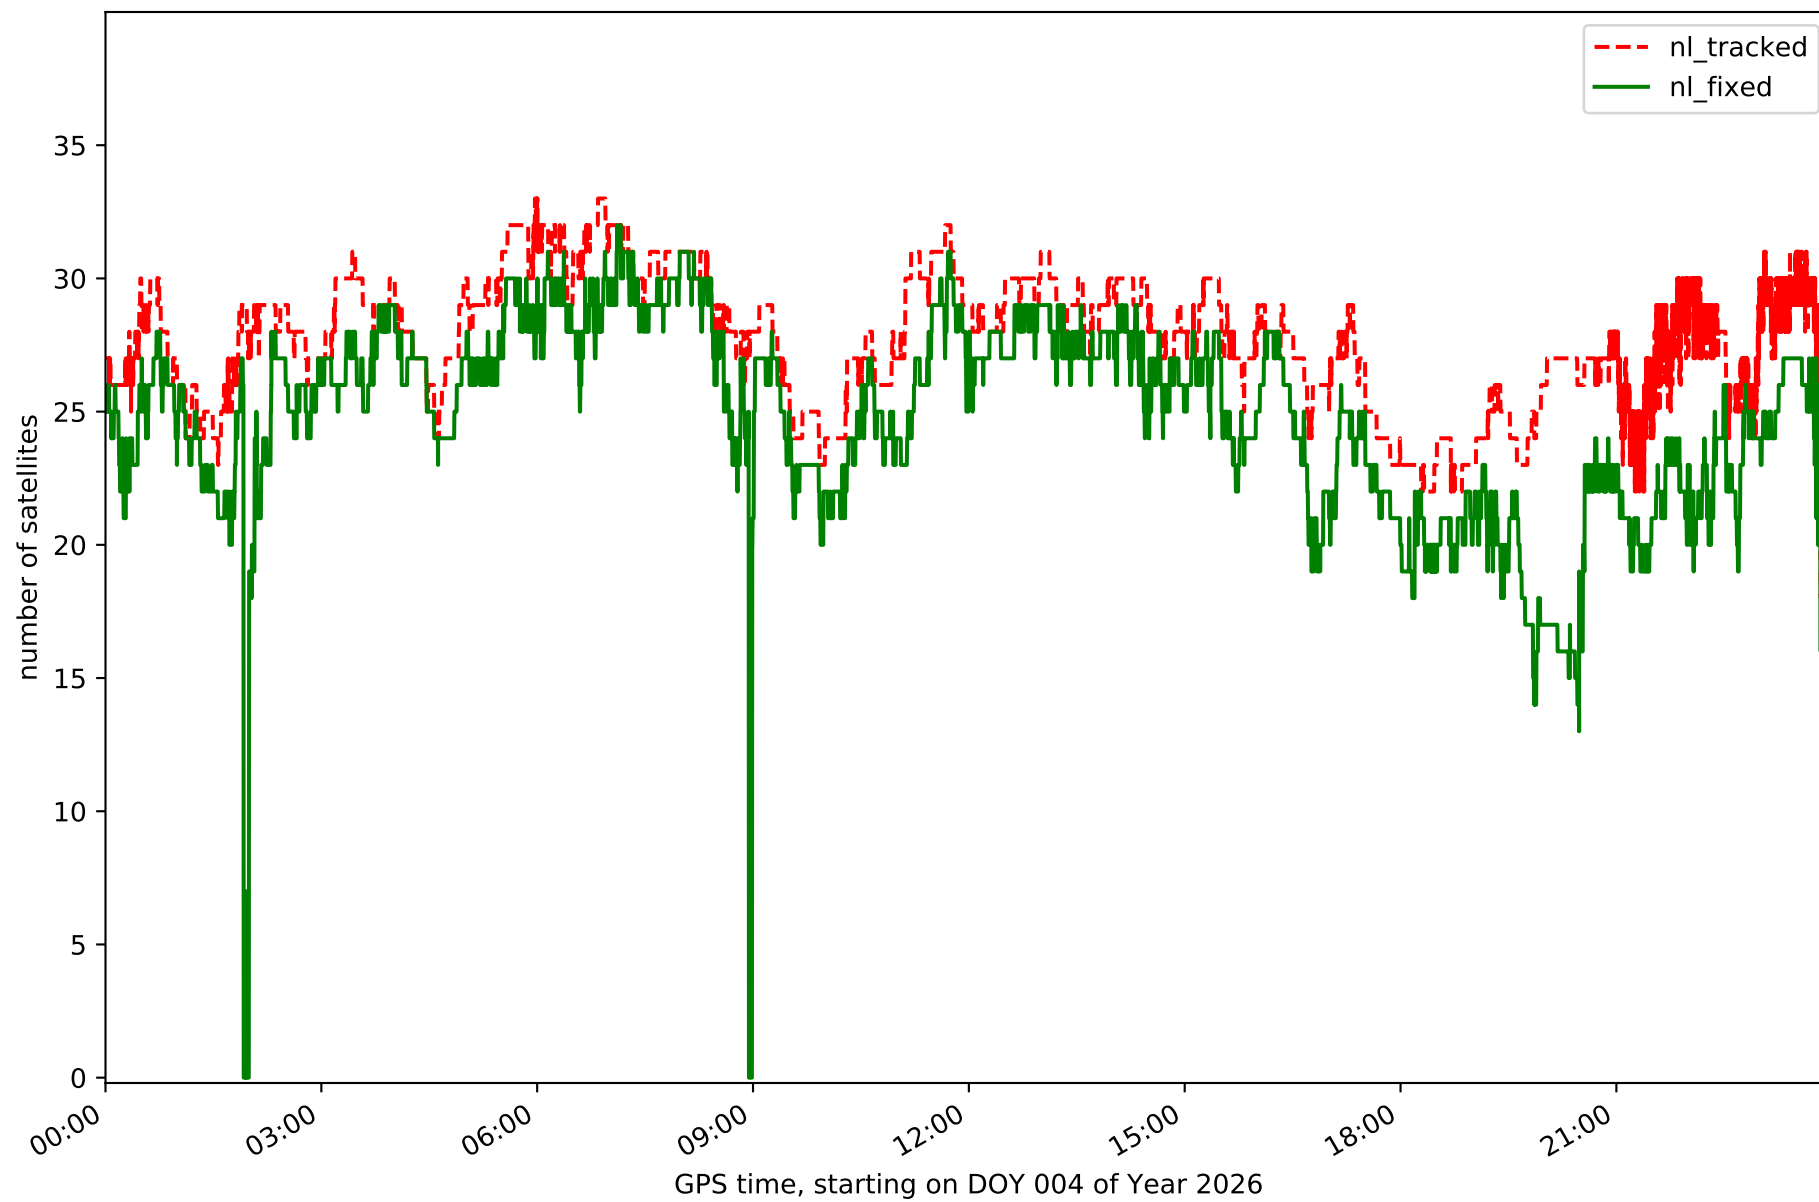


Station LP01 in network N32T

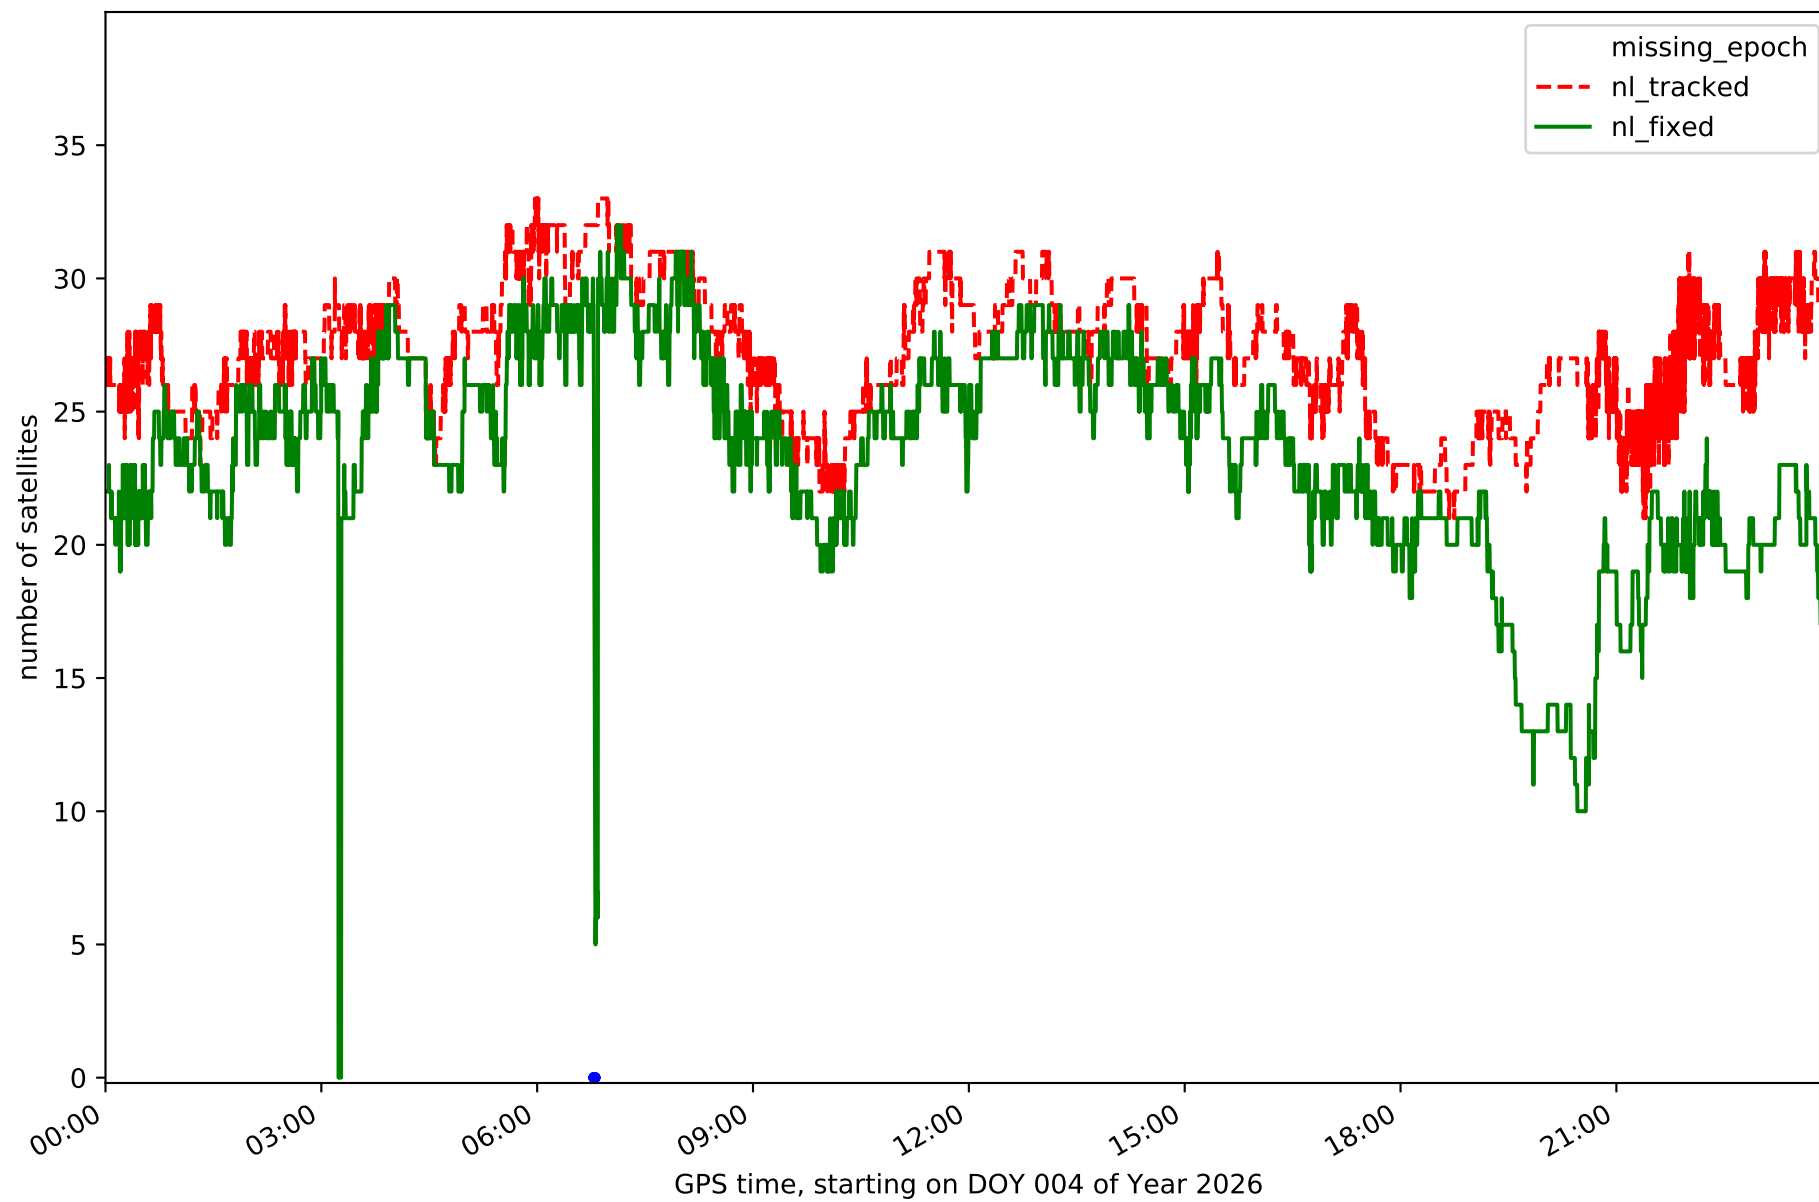


Station LP03 in network N32T

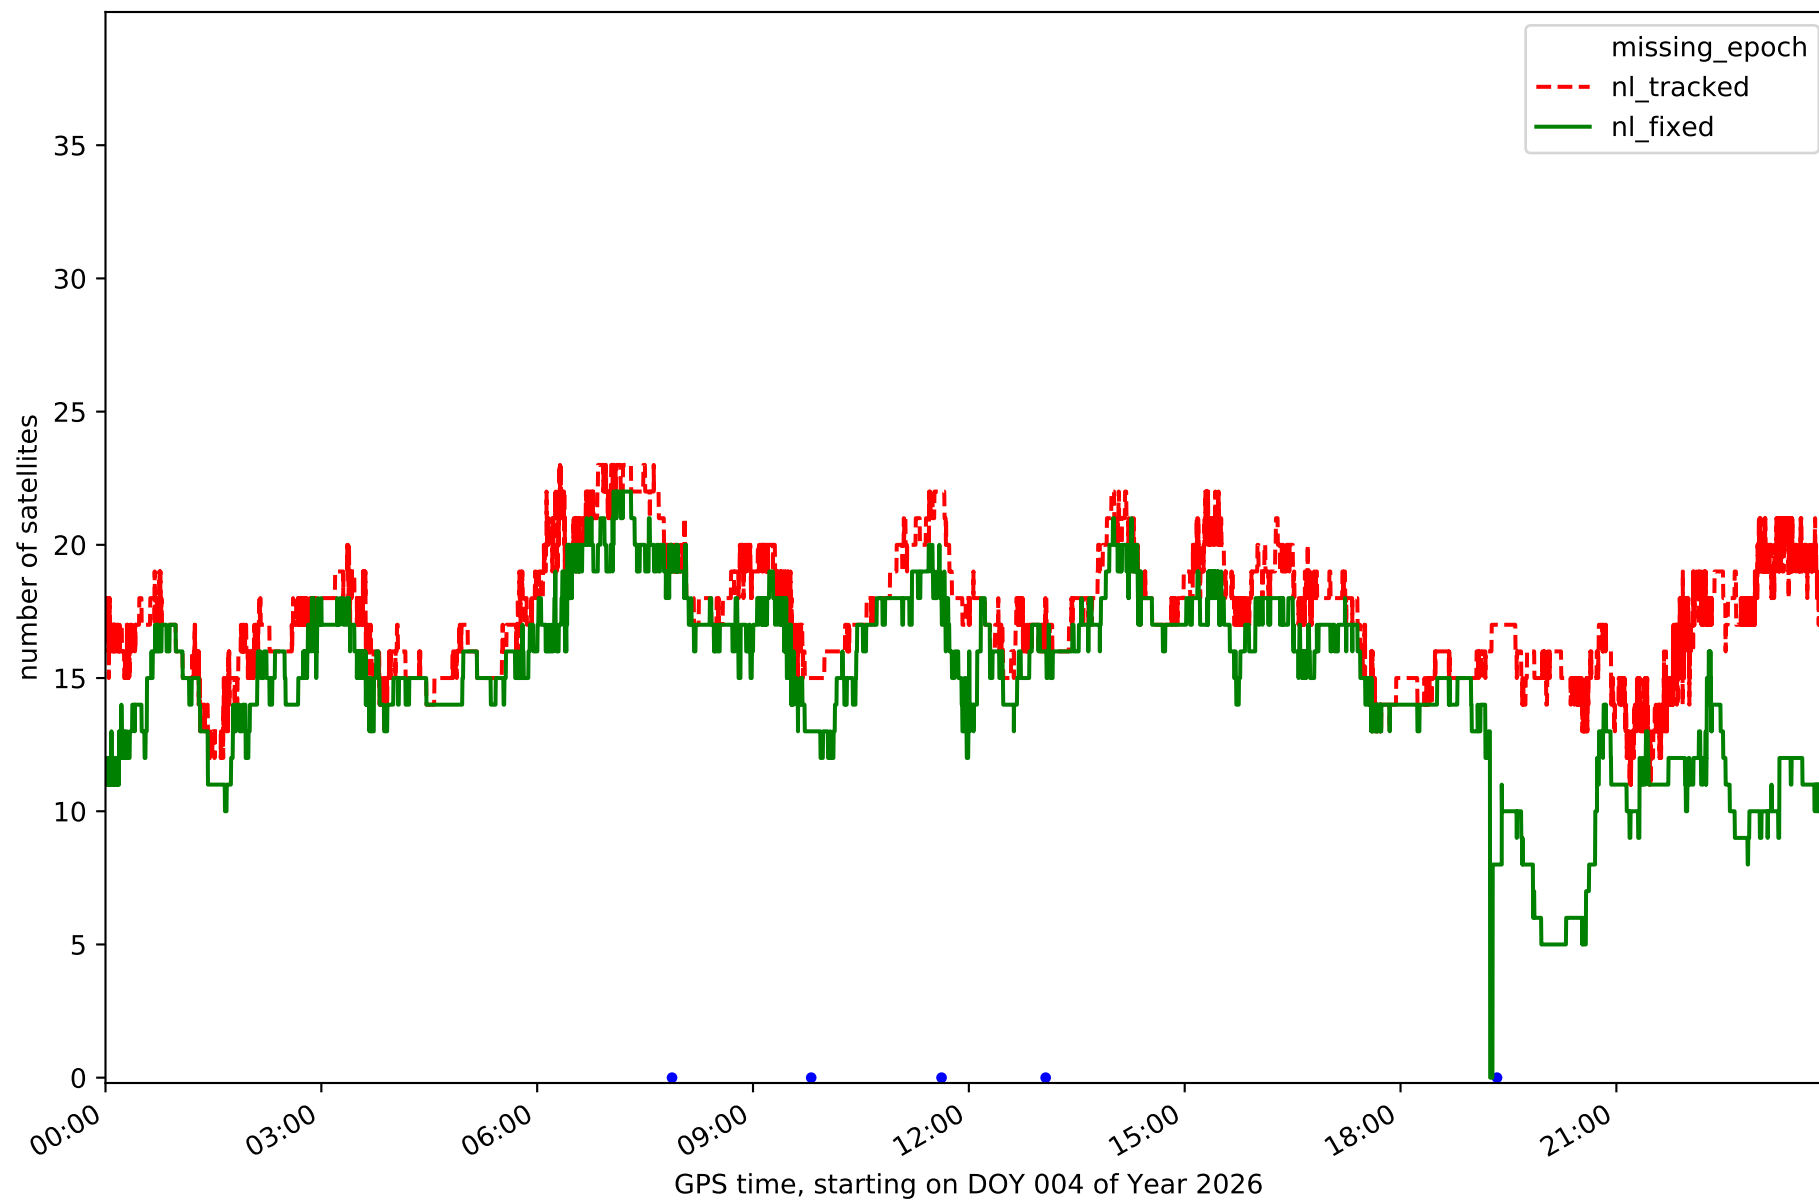


Station LPAL in network N32T

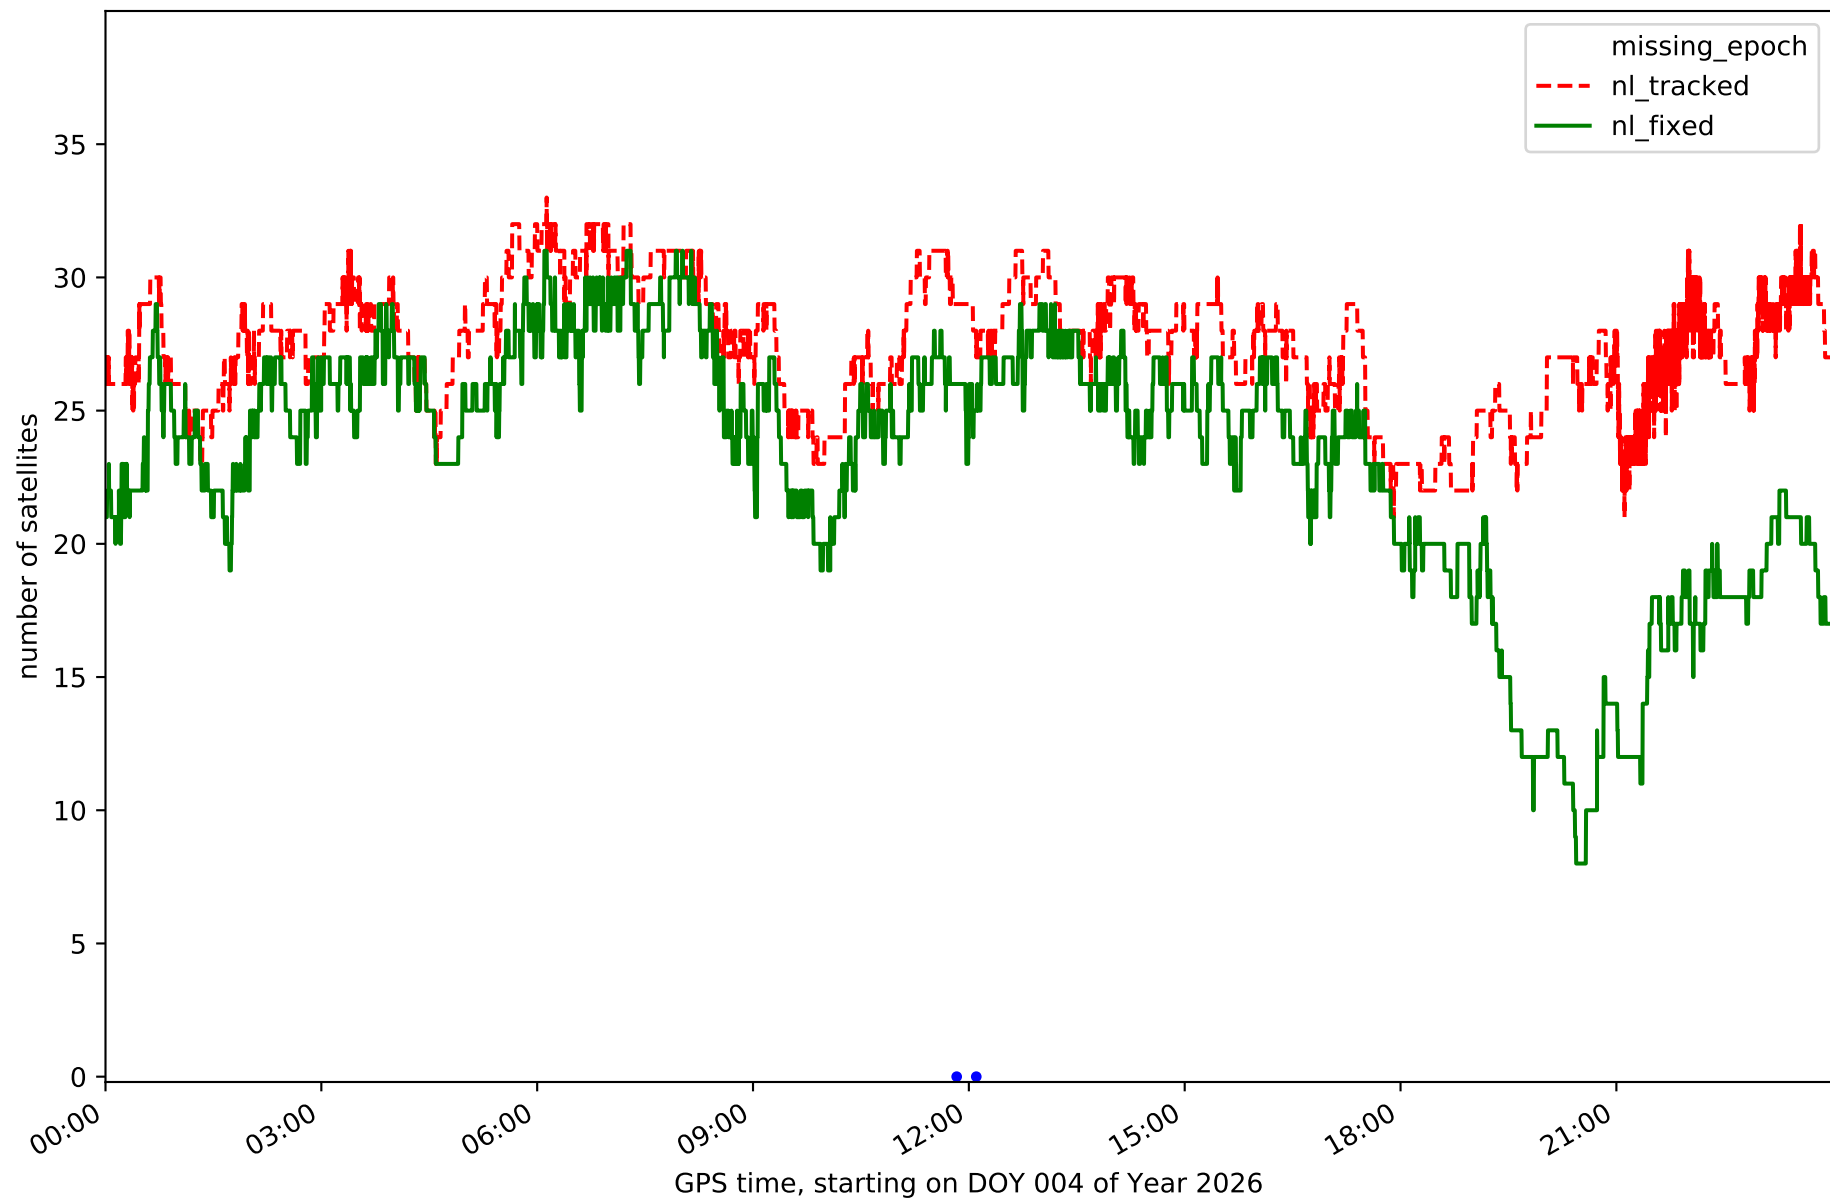


Station LRES in network N32T

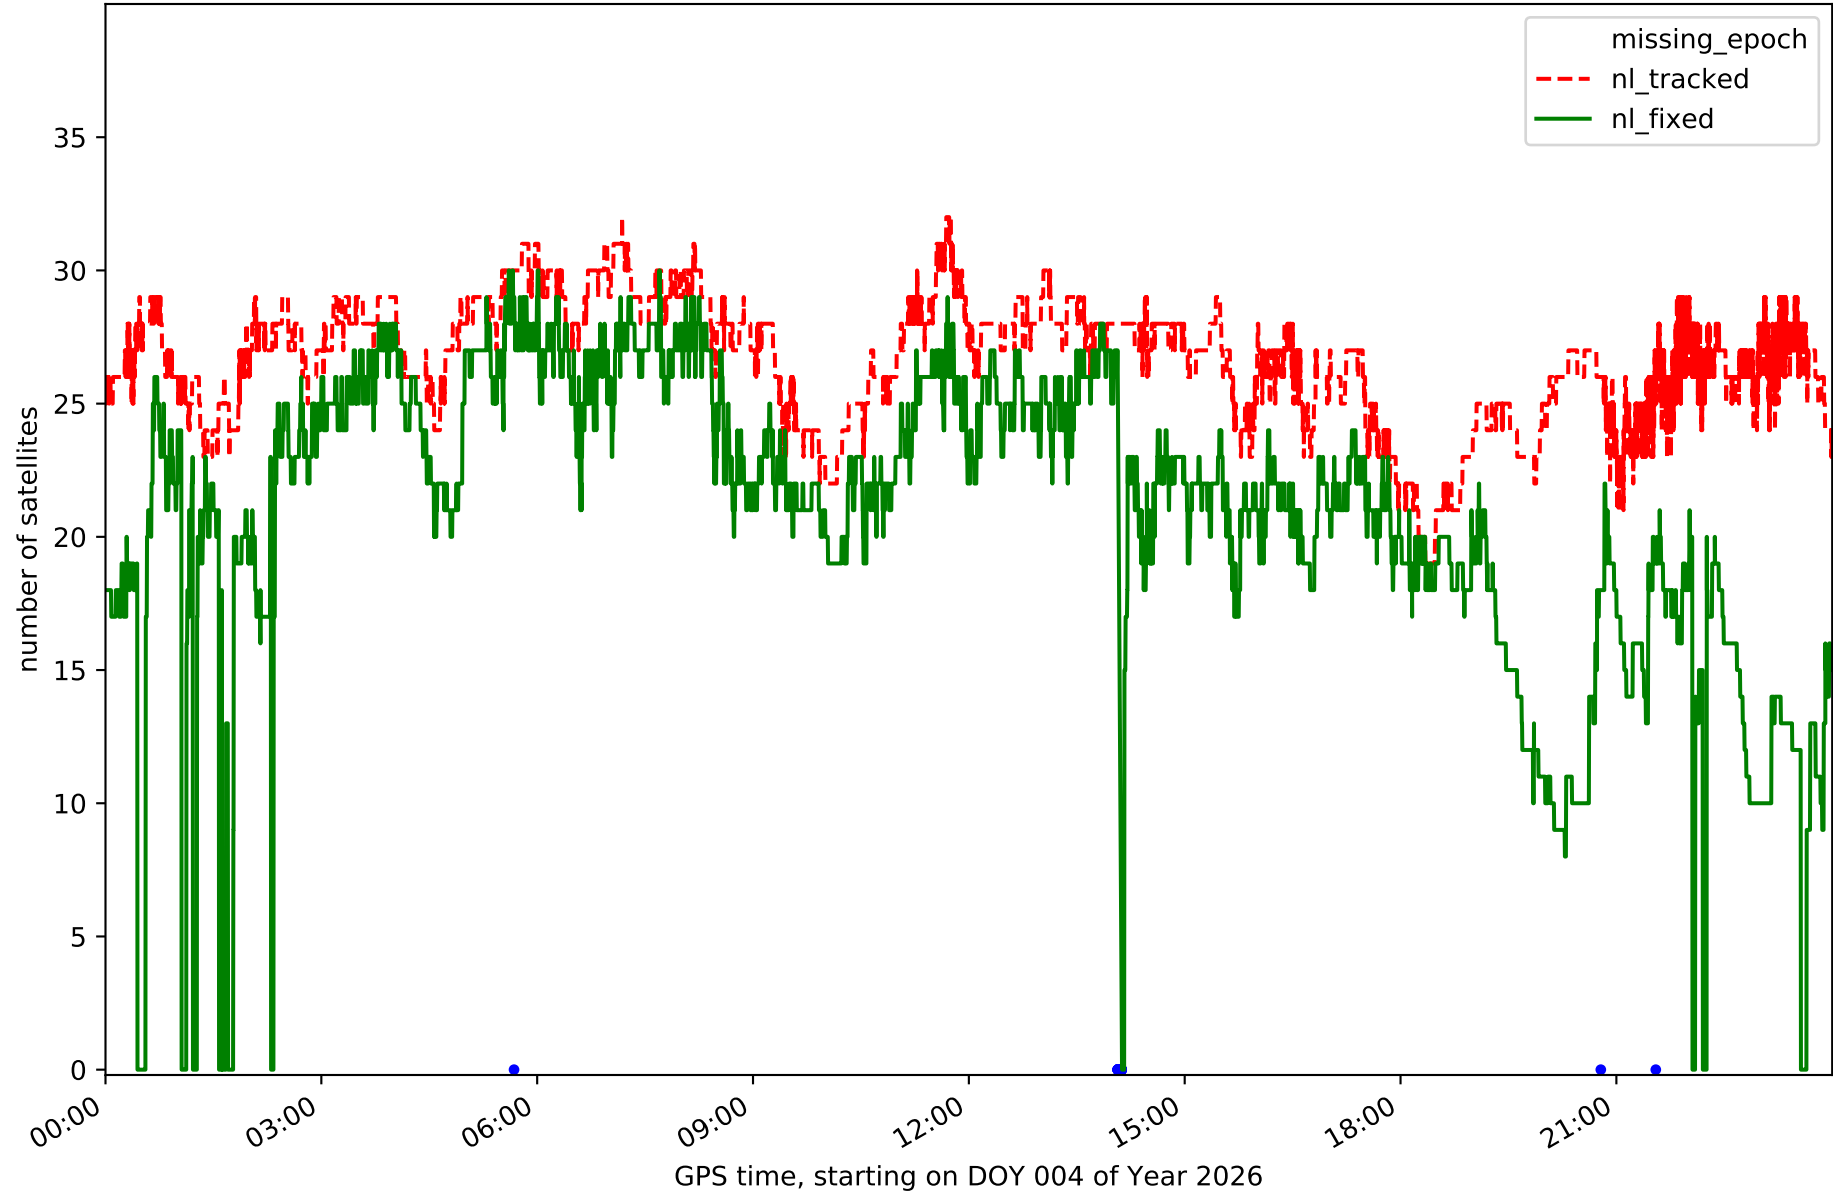


Station TN01 in network N32T

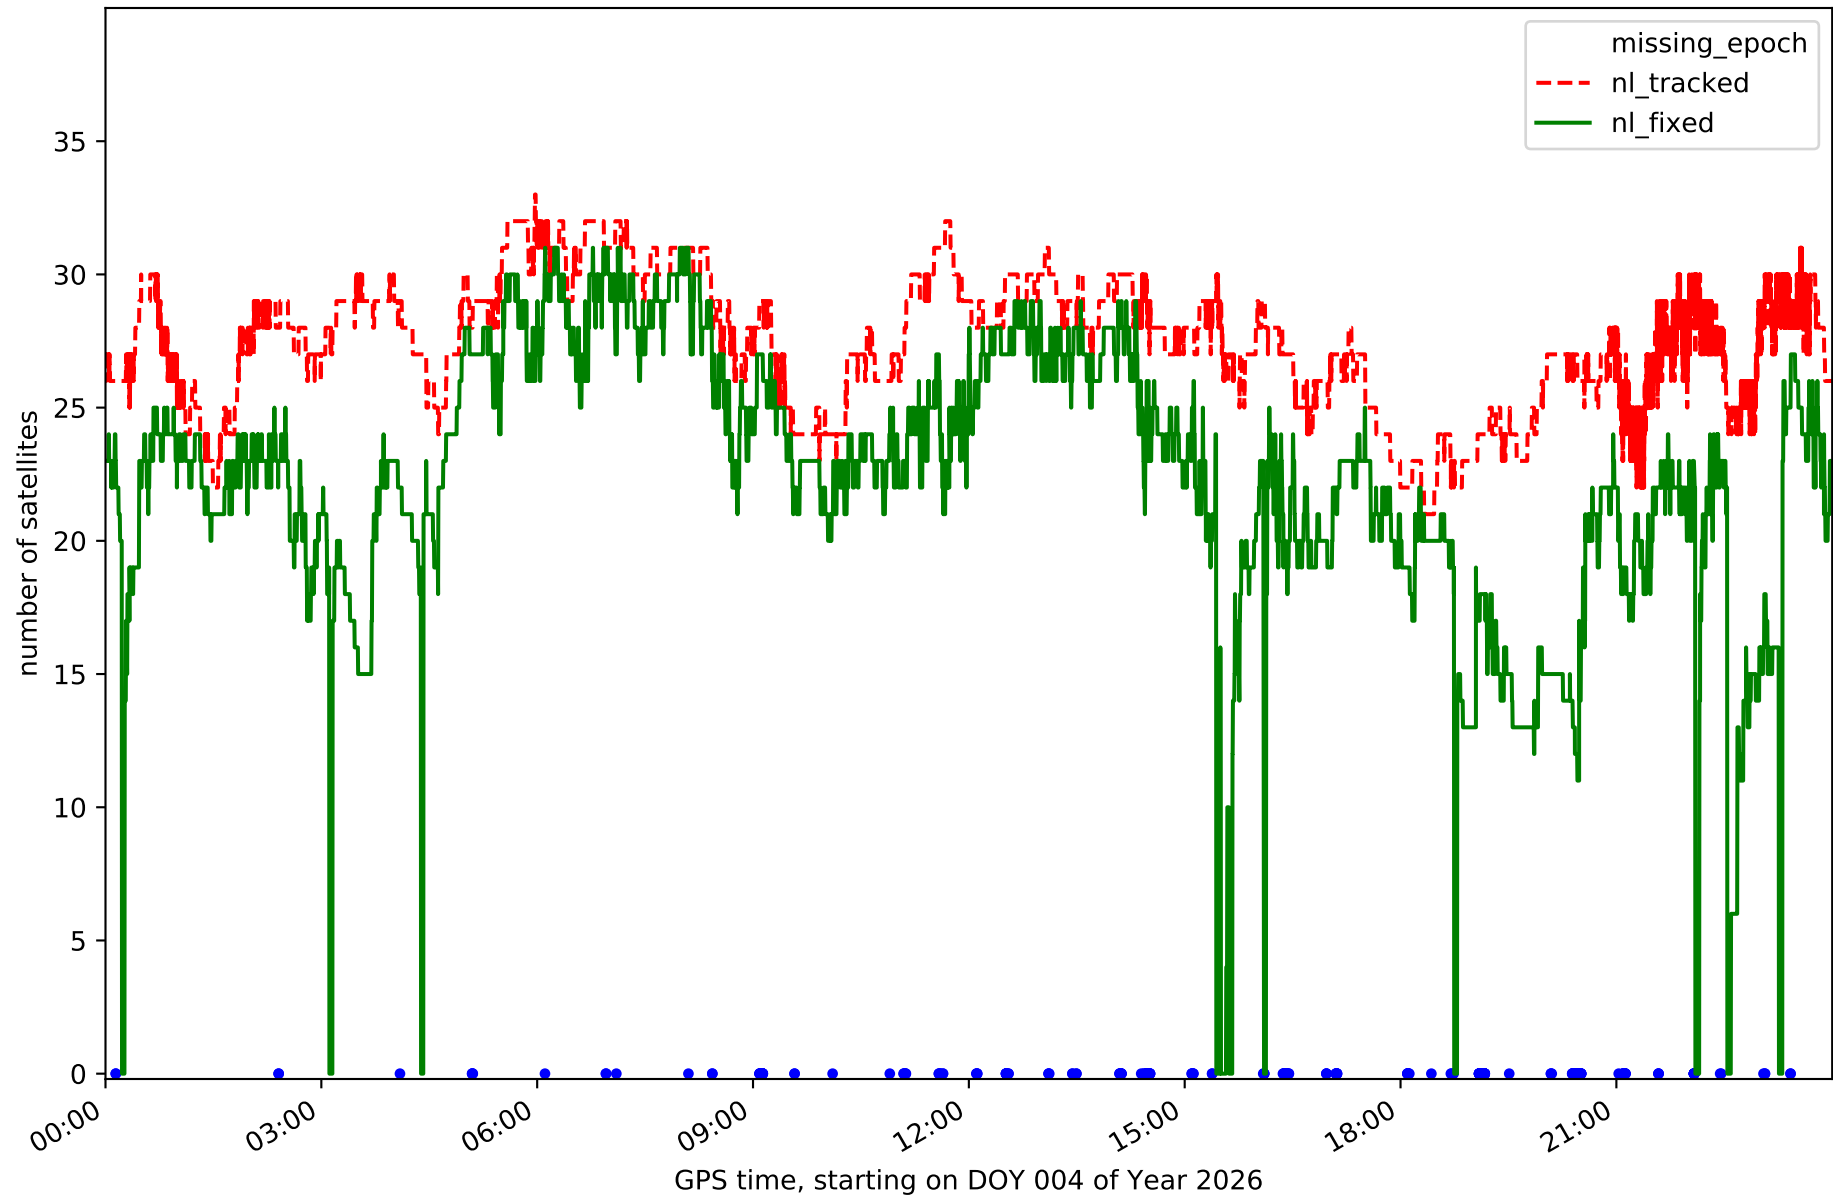


Station TN02 in network N32T

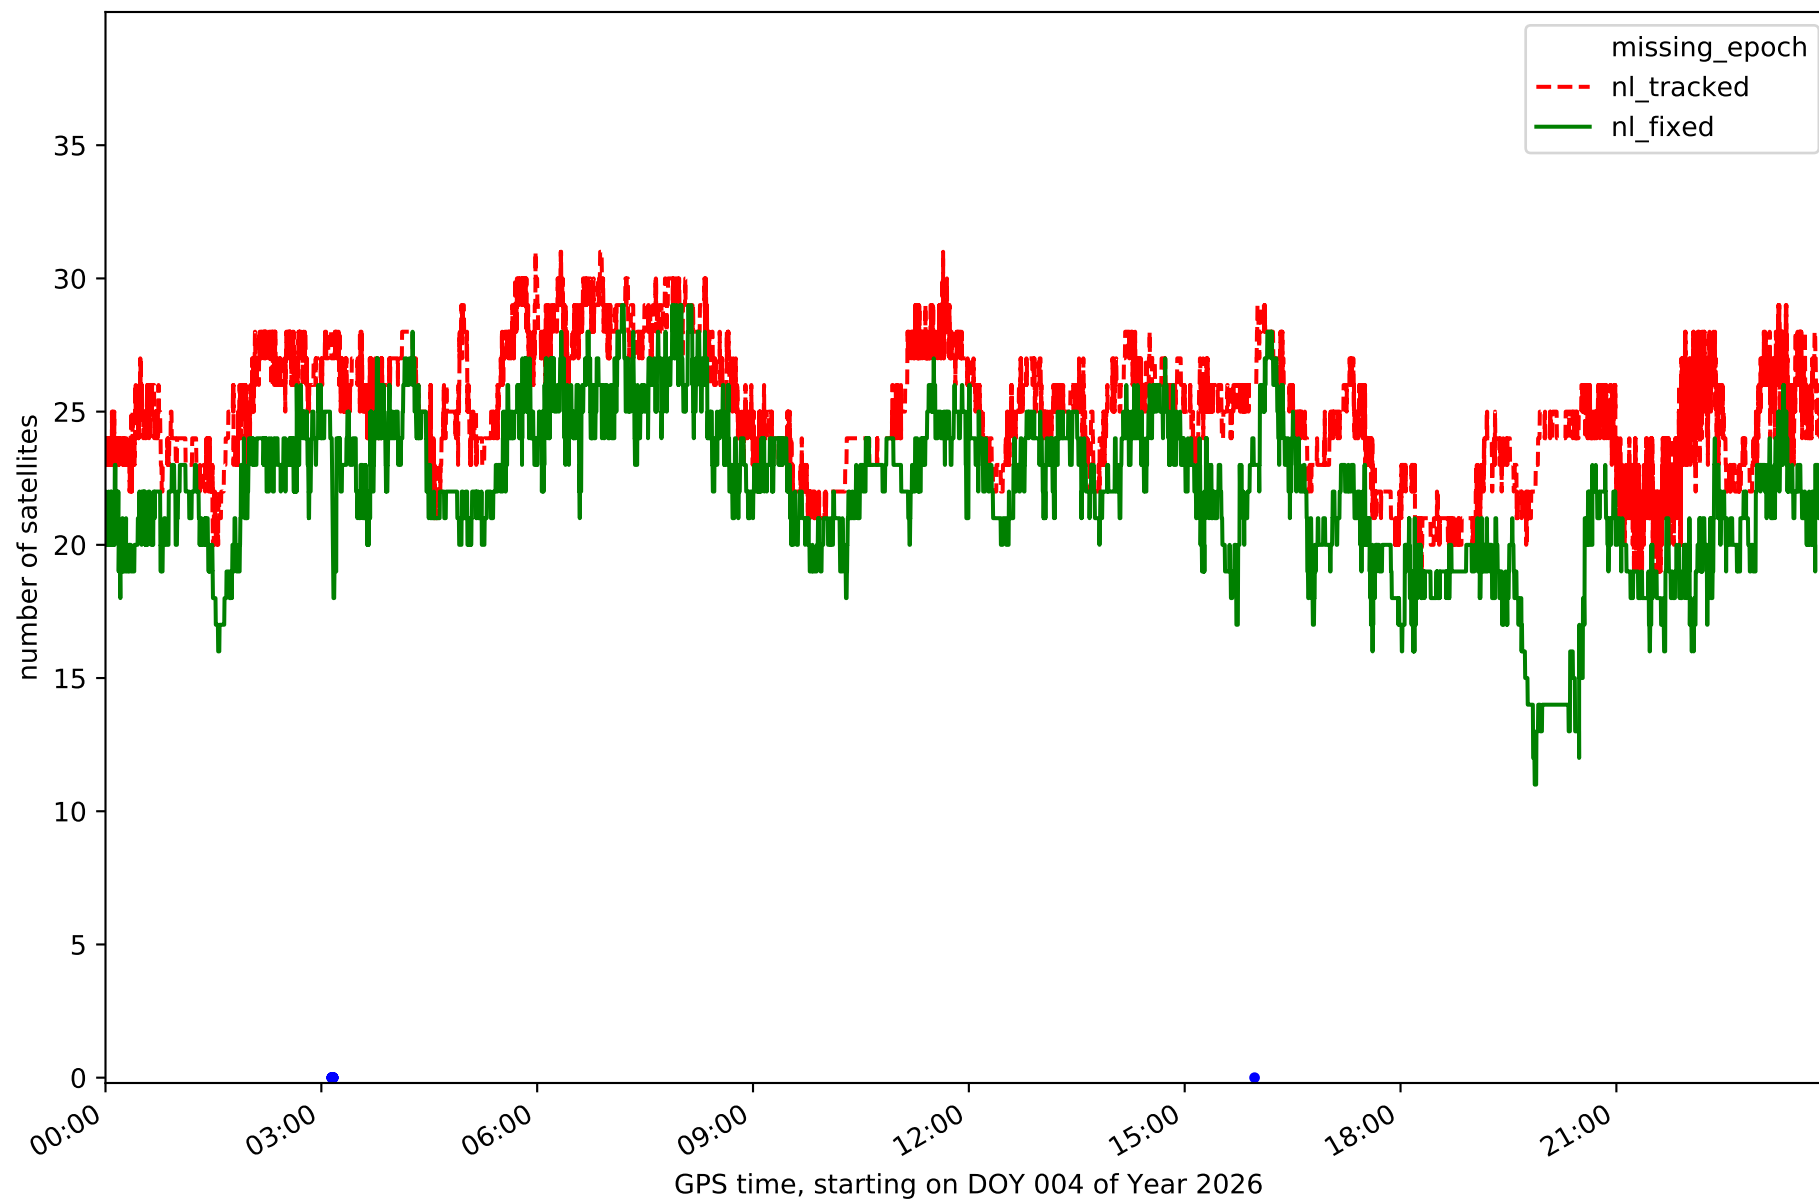


Station TN03 in network N32T

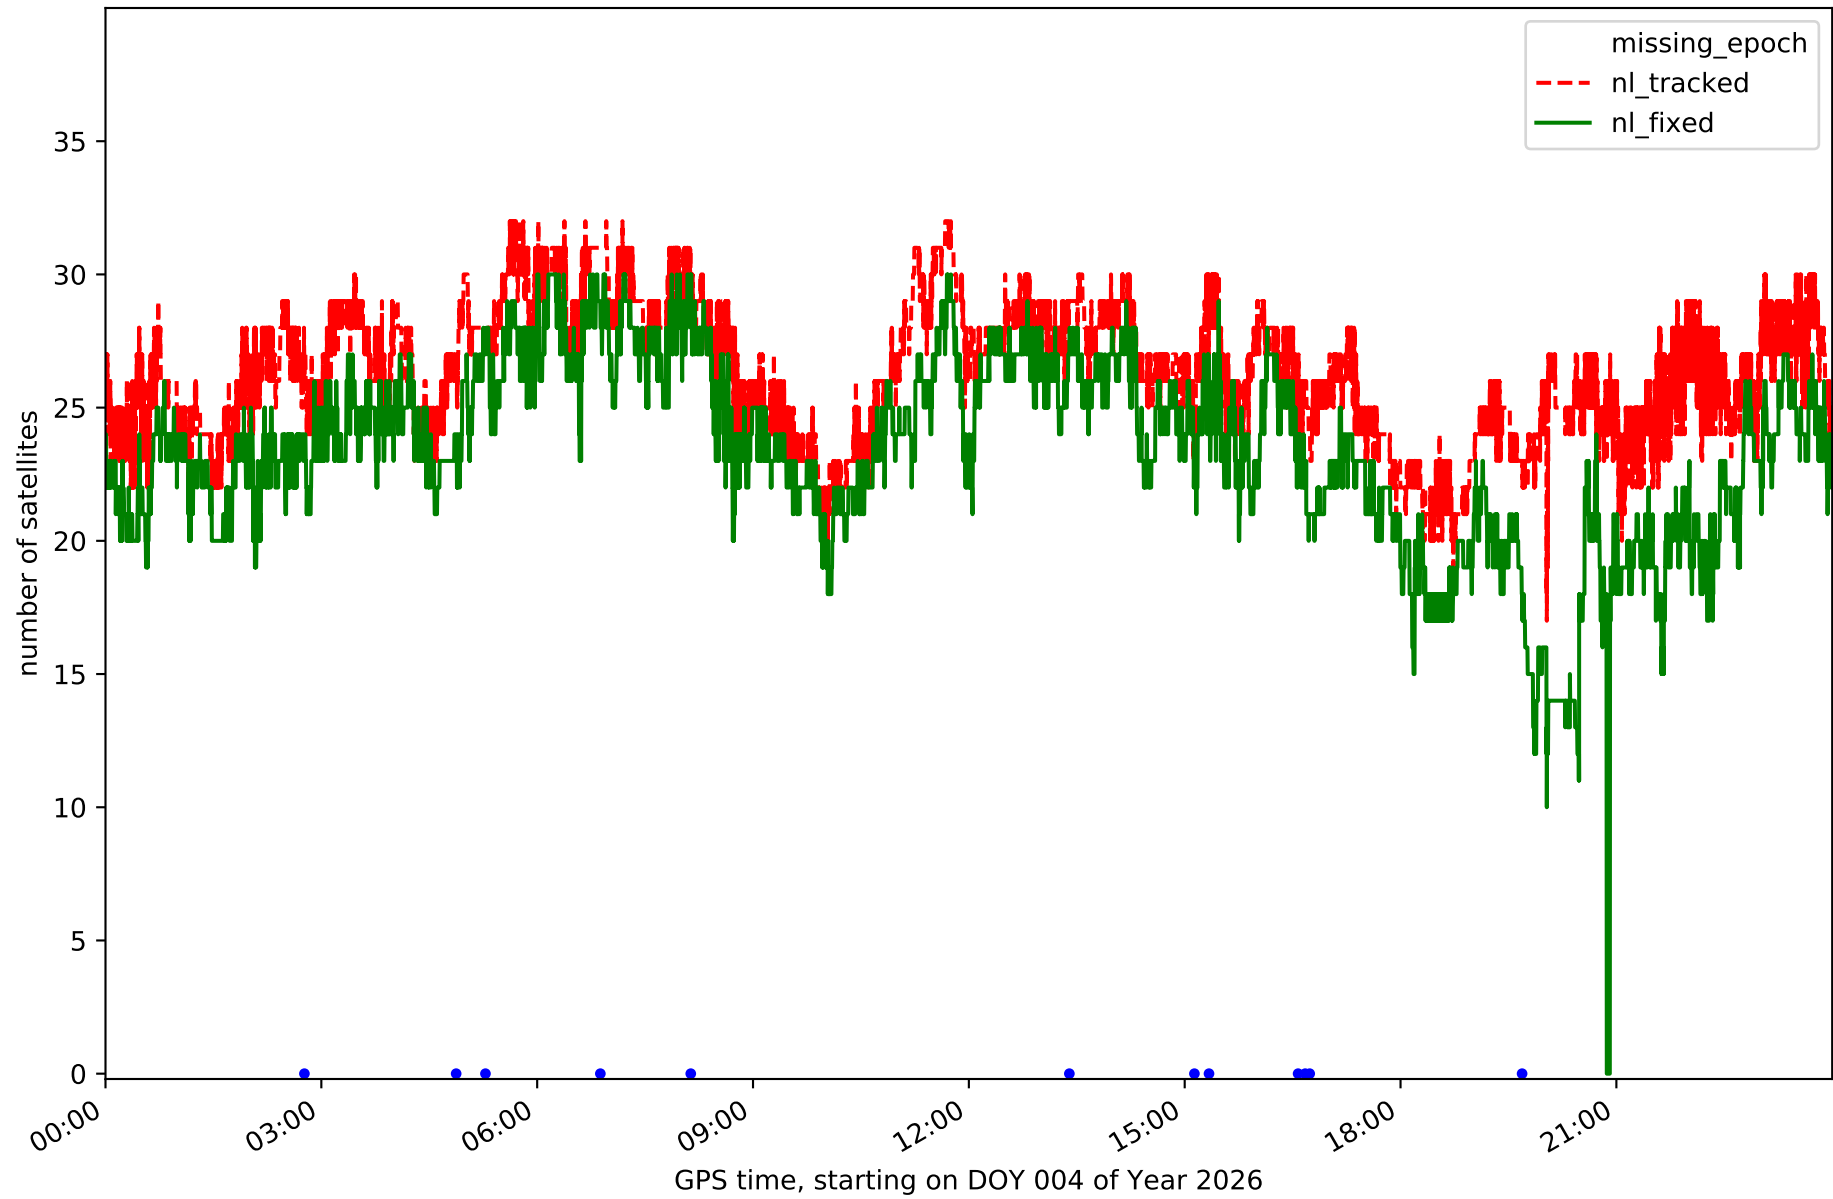


Station TN06 in network N32T

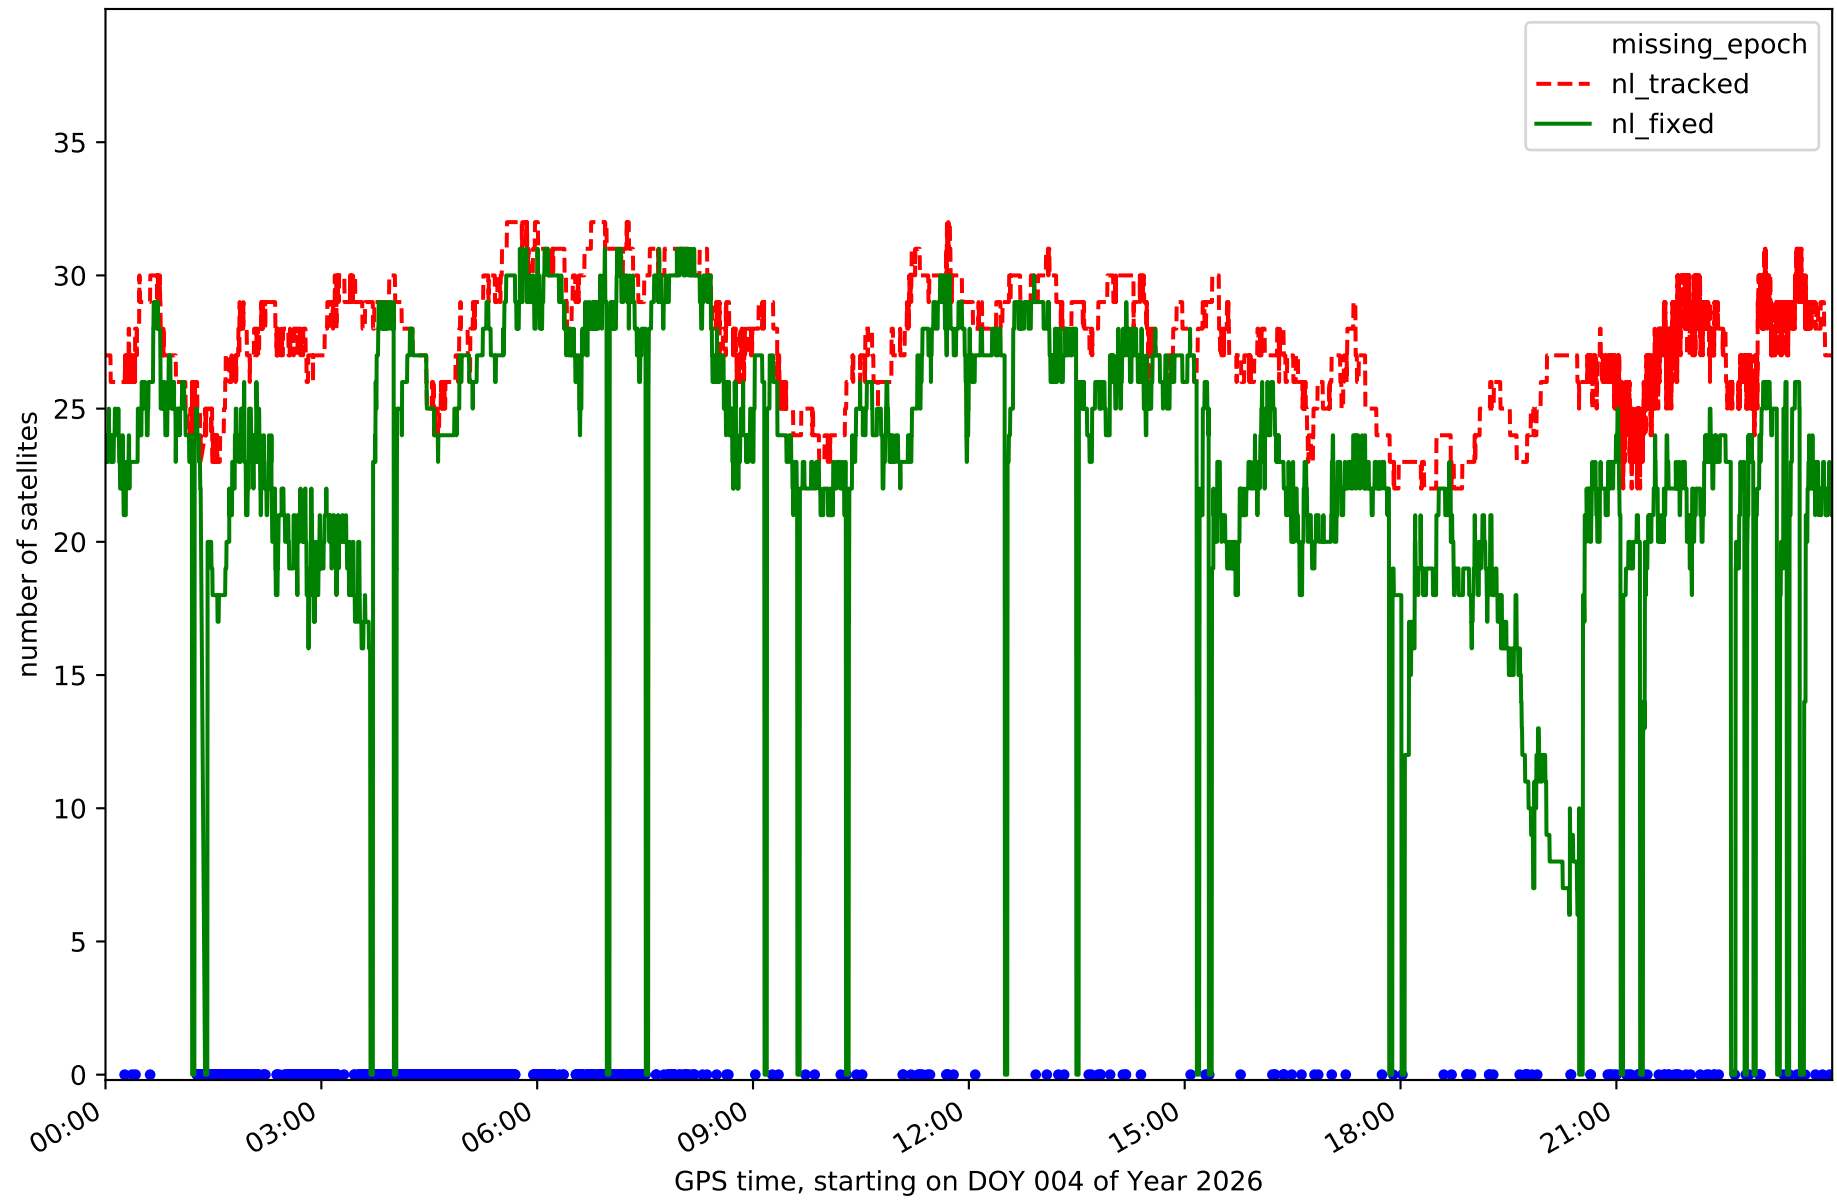


Station TN09 in network N32T

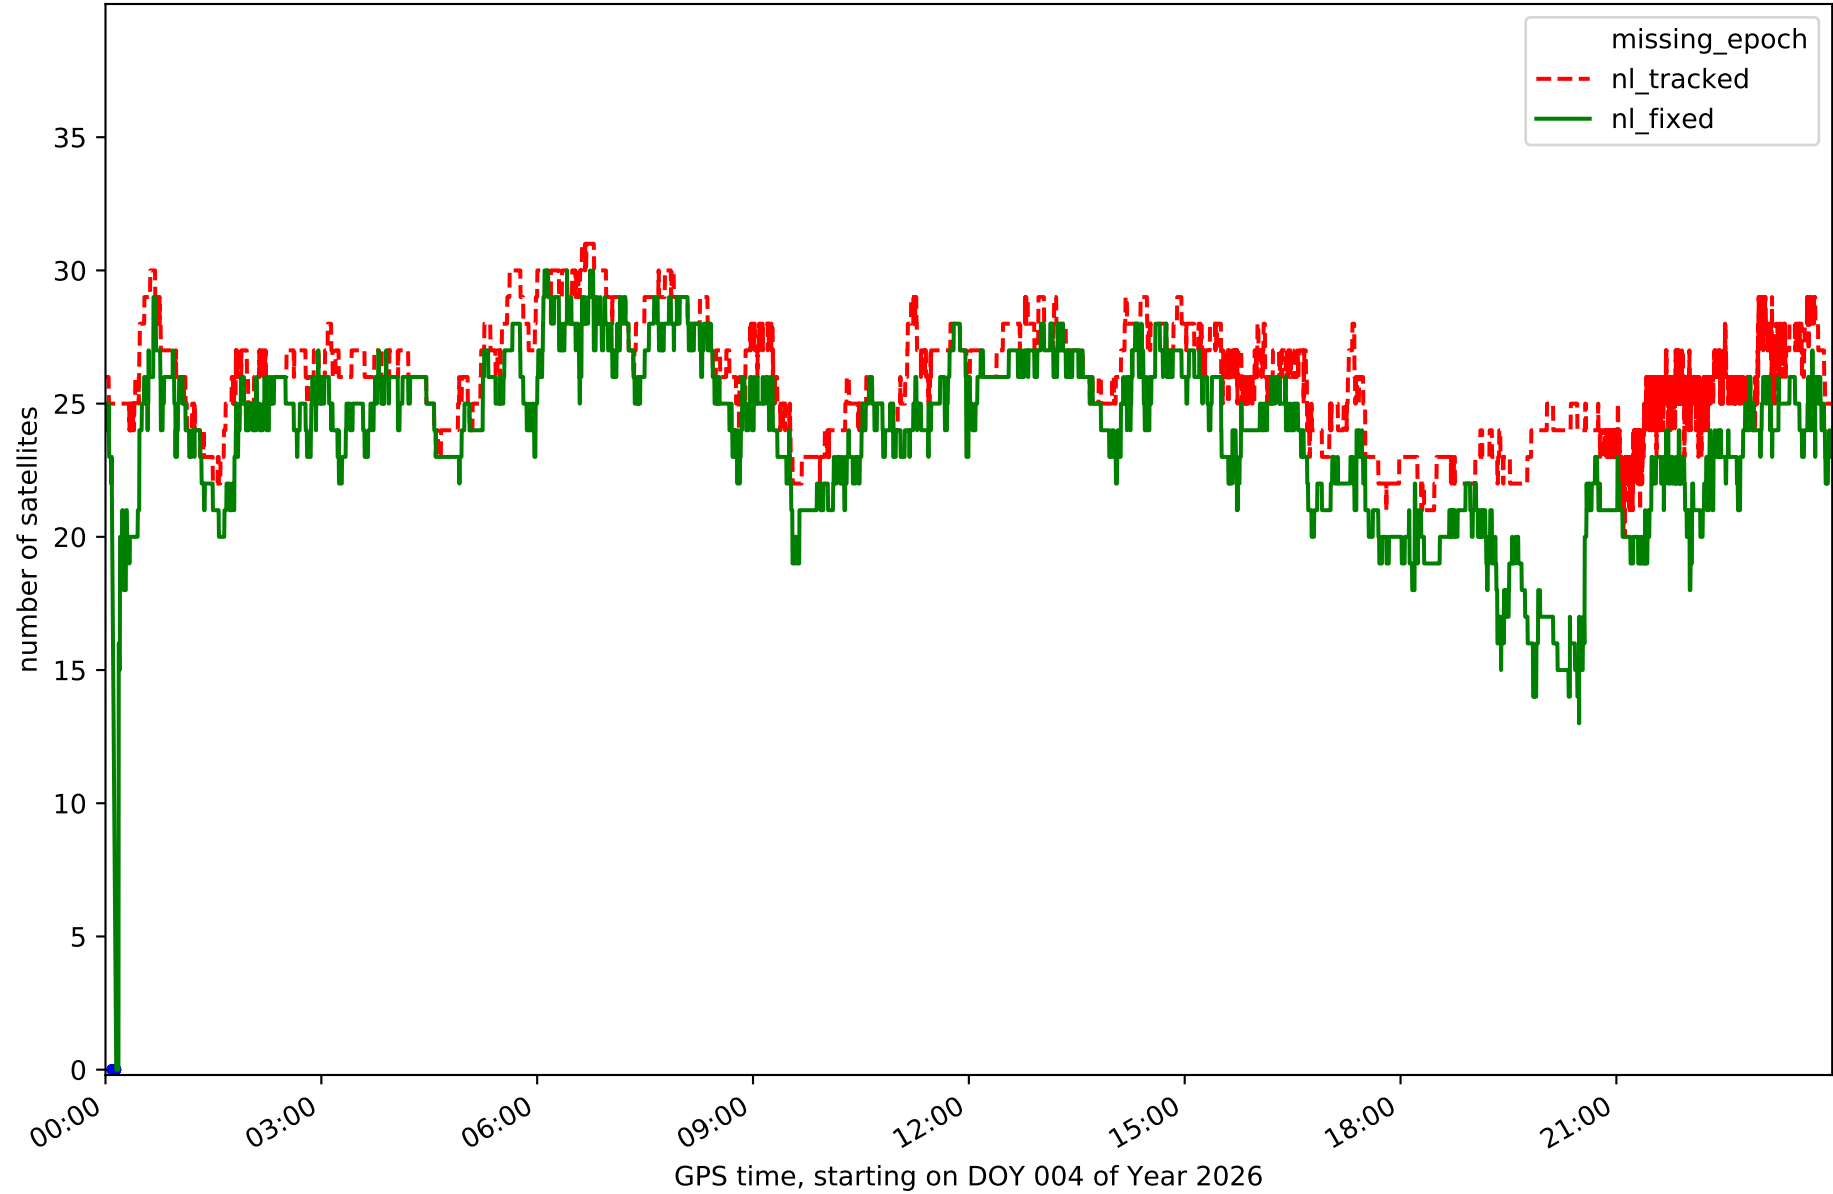


Station TE11 in network N32T

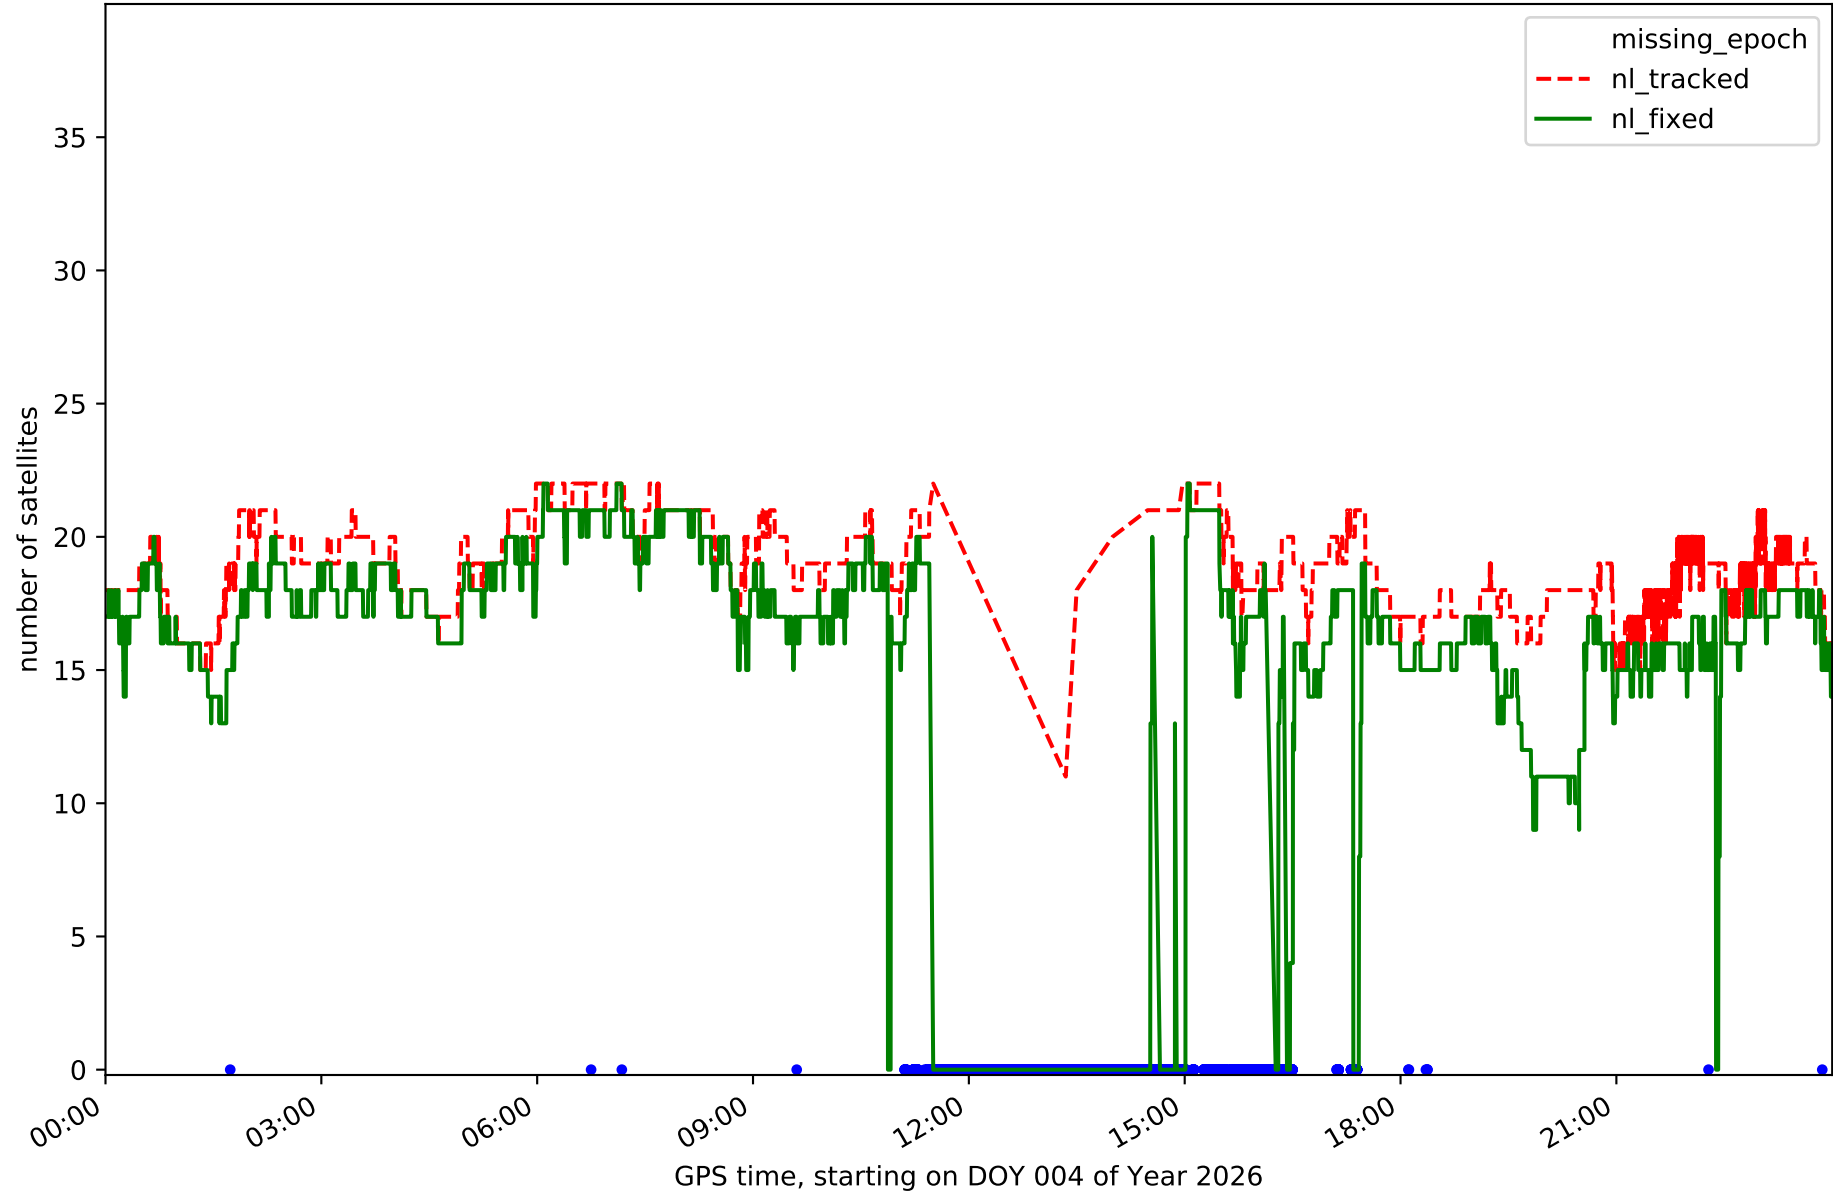


RefCheck for station EH01 in network N32T

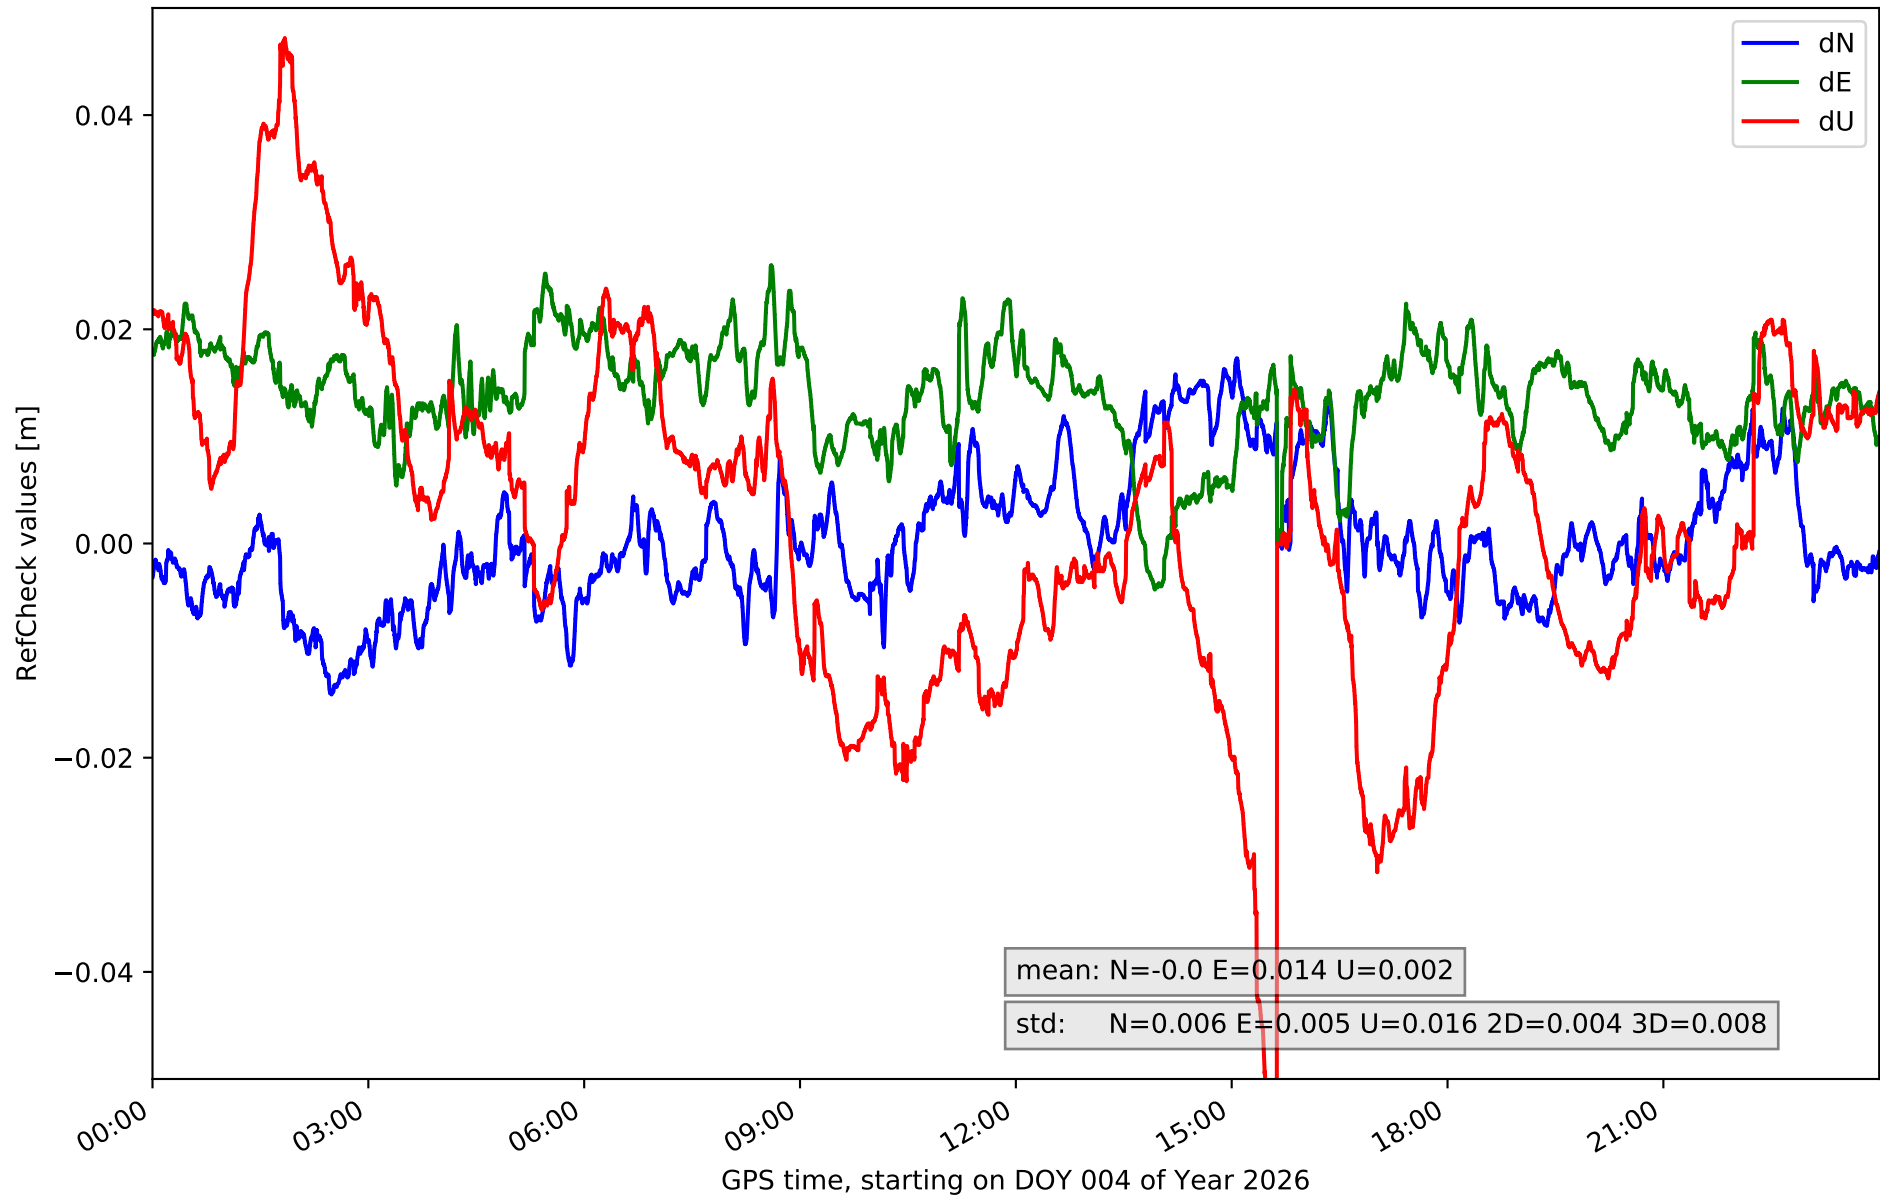


RefCheck for station EH02 in network N32T

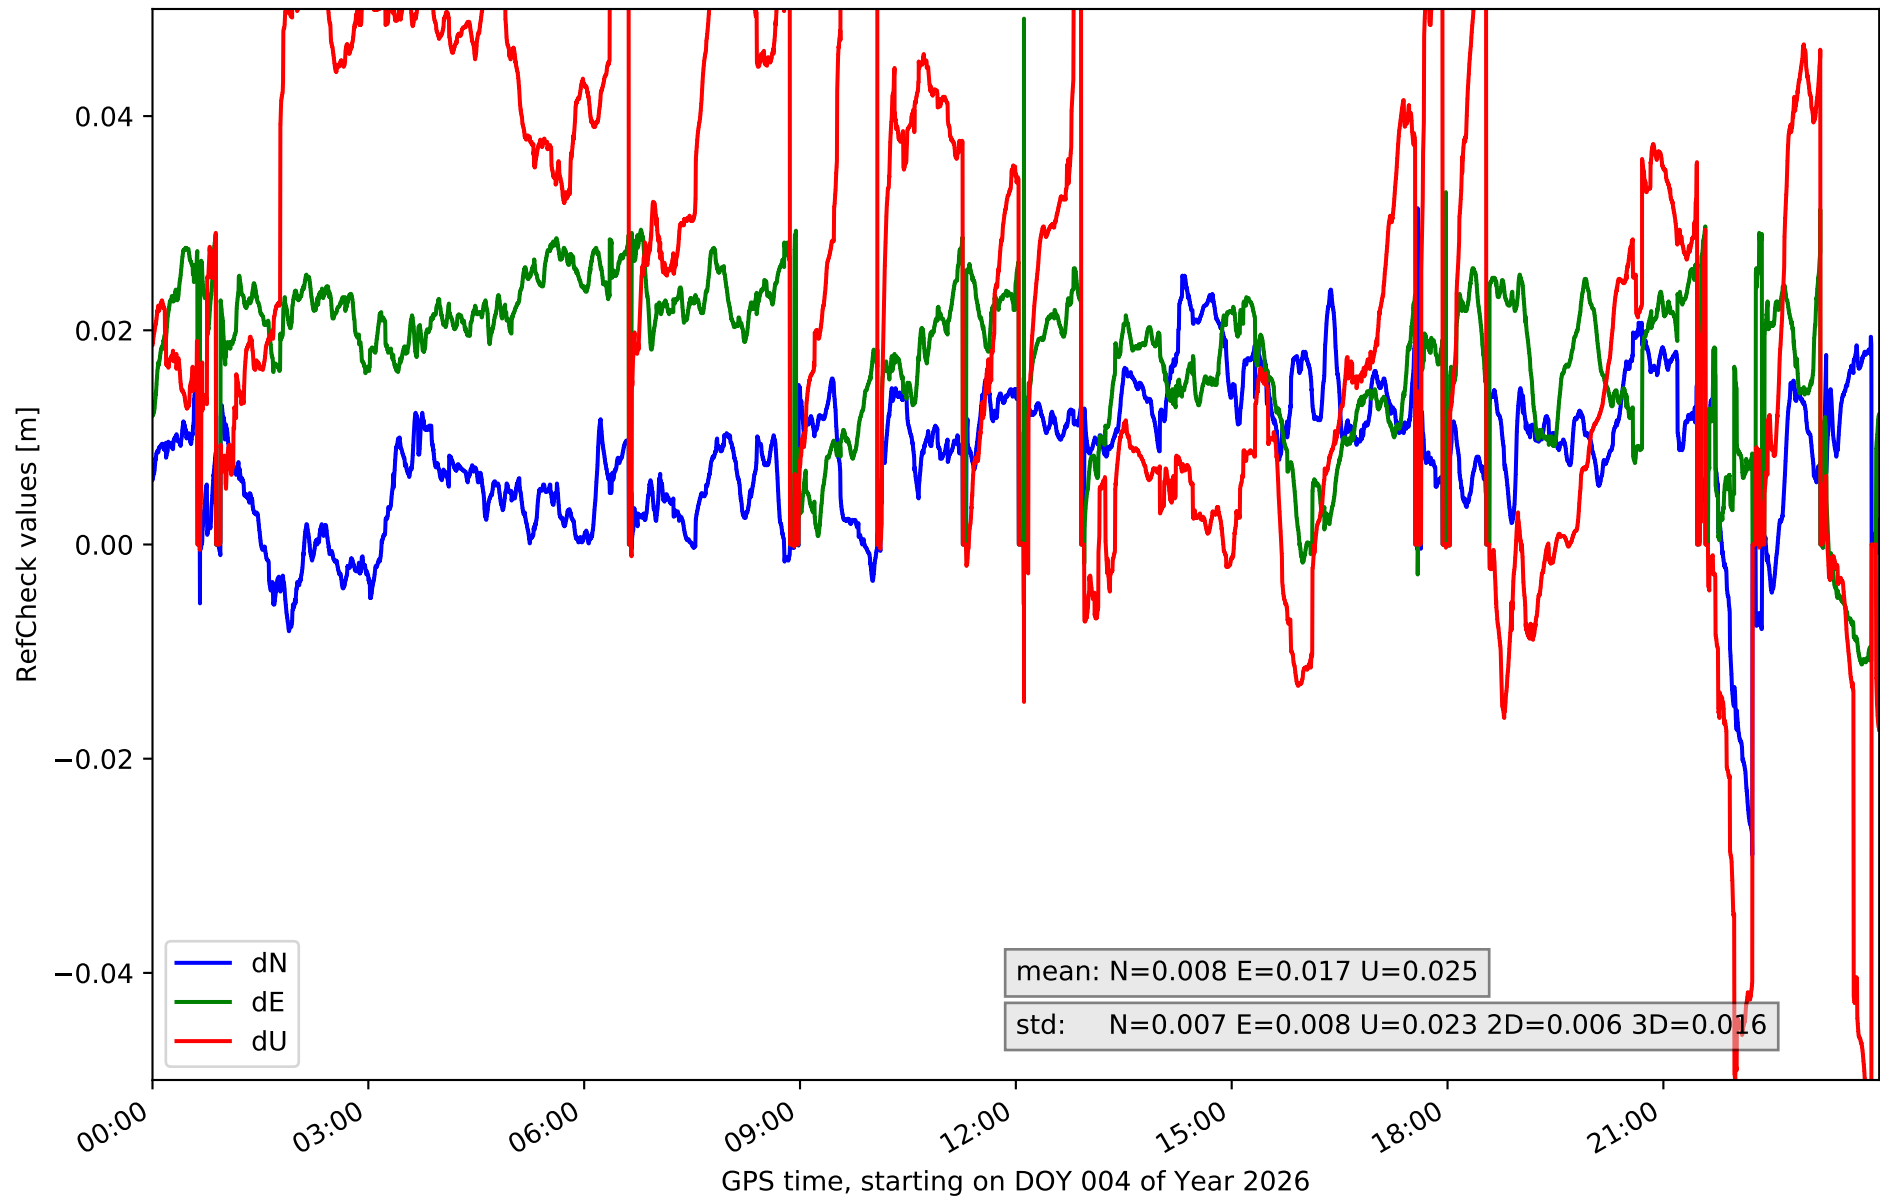


RefCheck for station GOM1 in network N32T

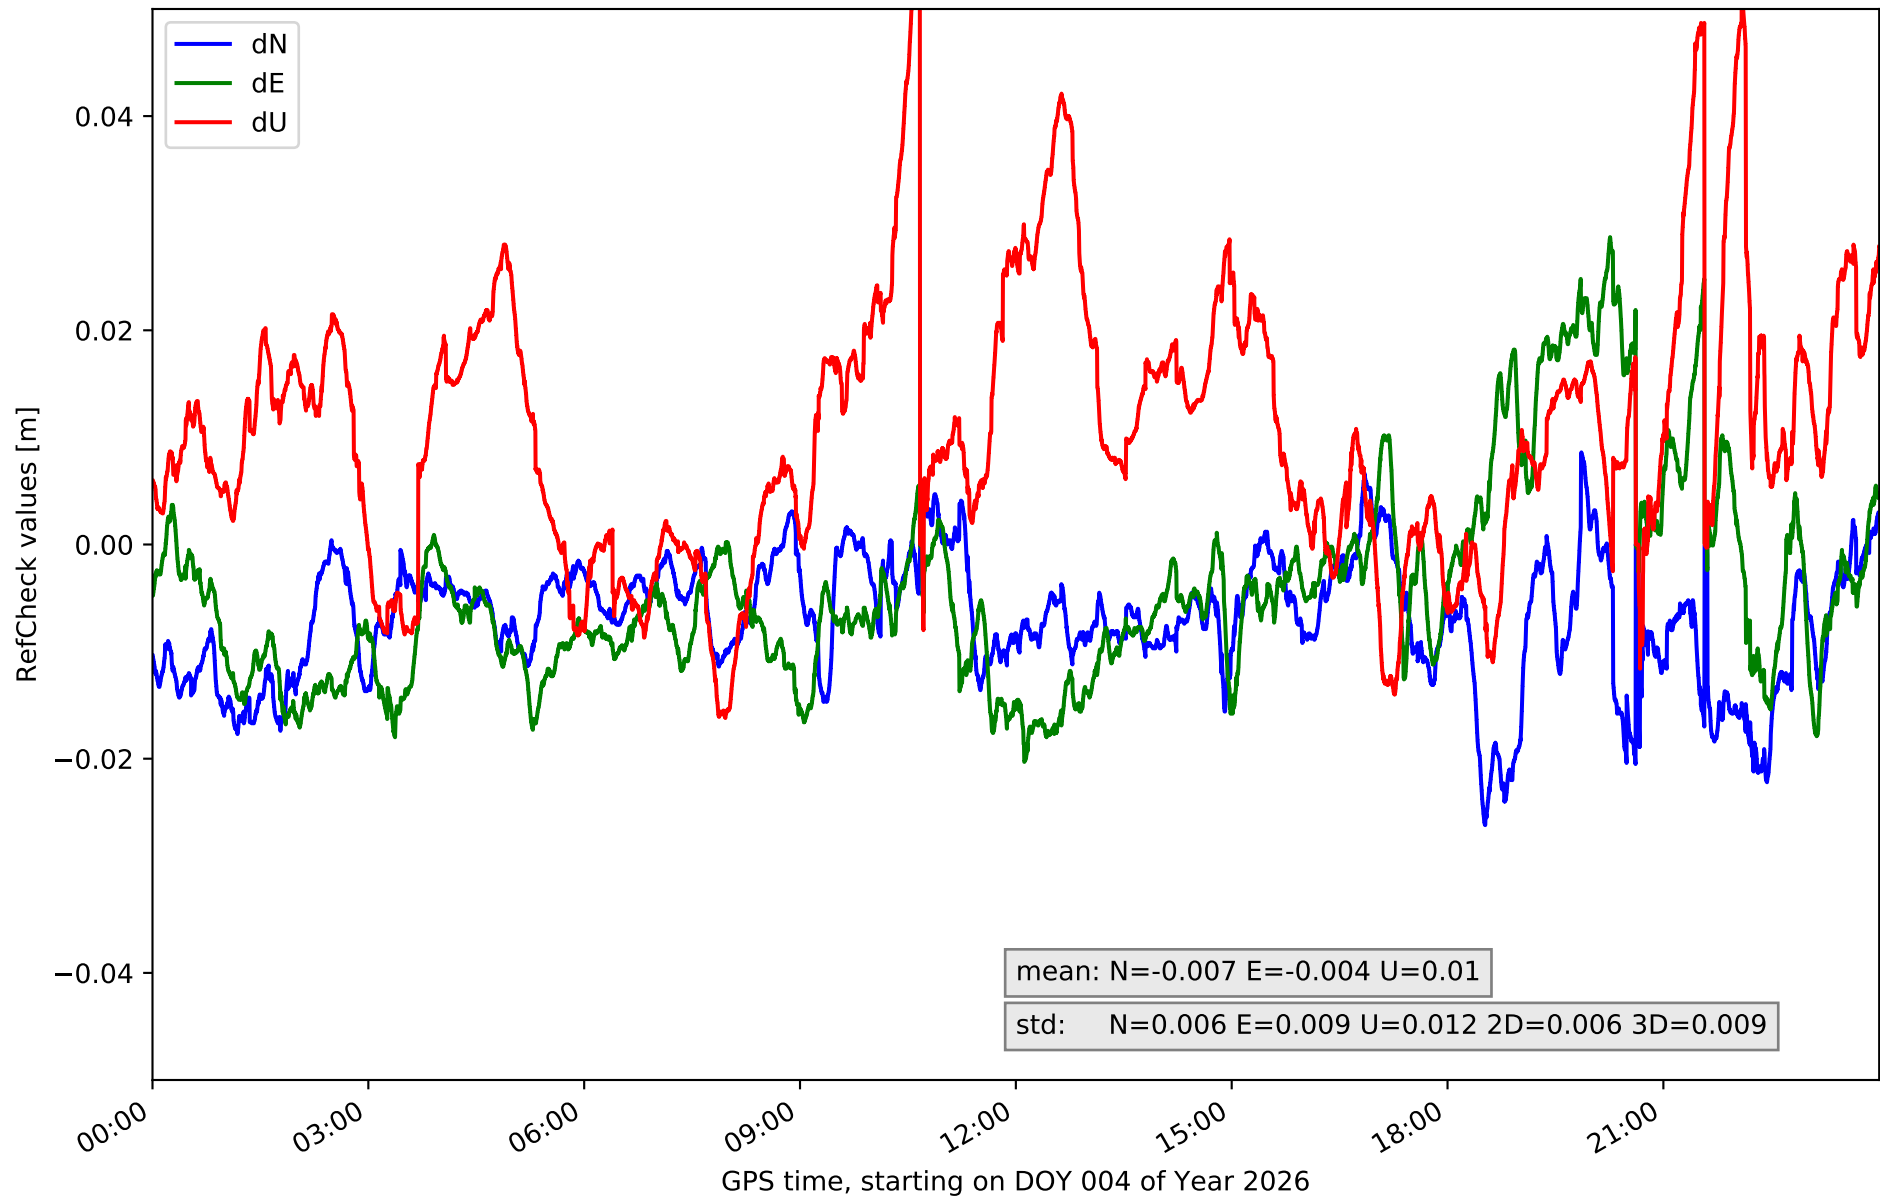


RefCheck for station GOME in network N32T

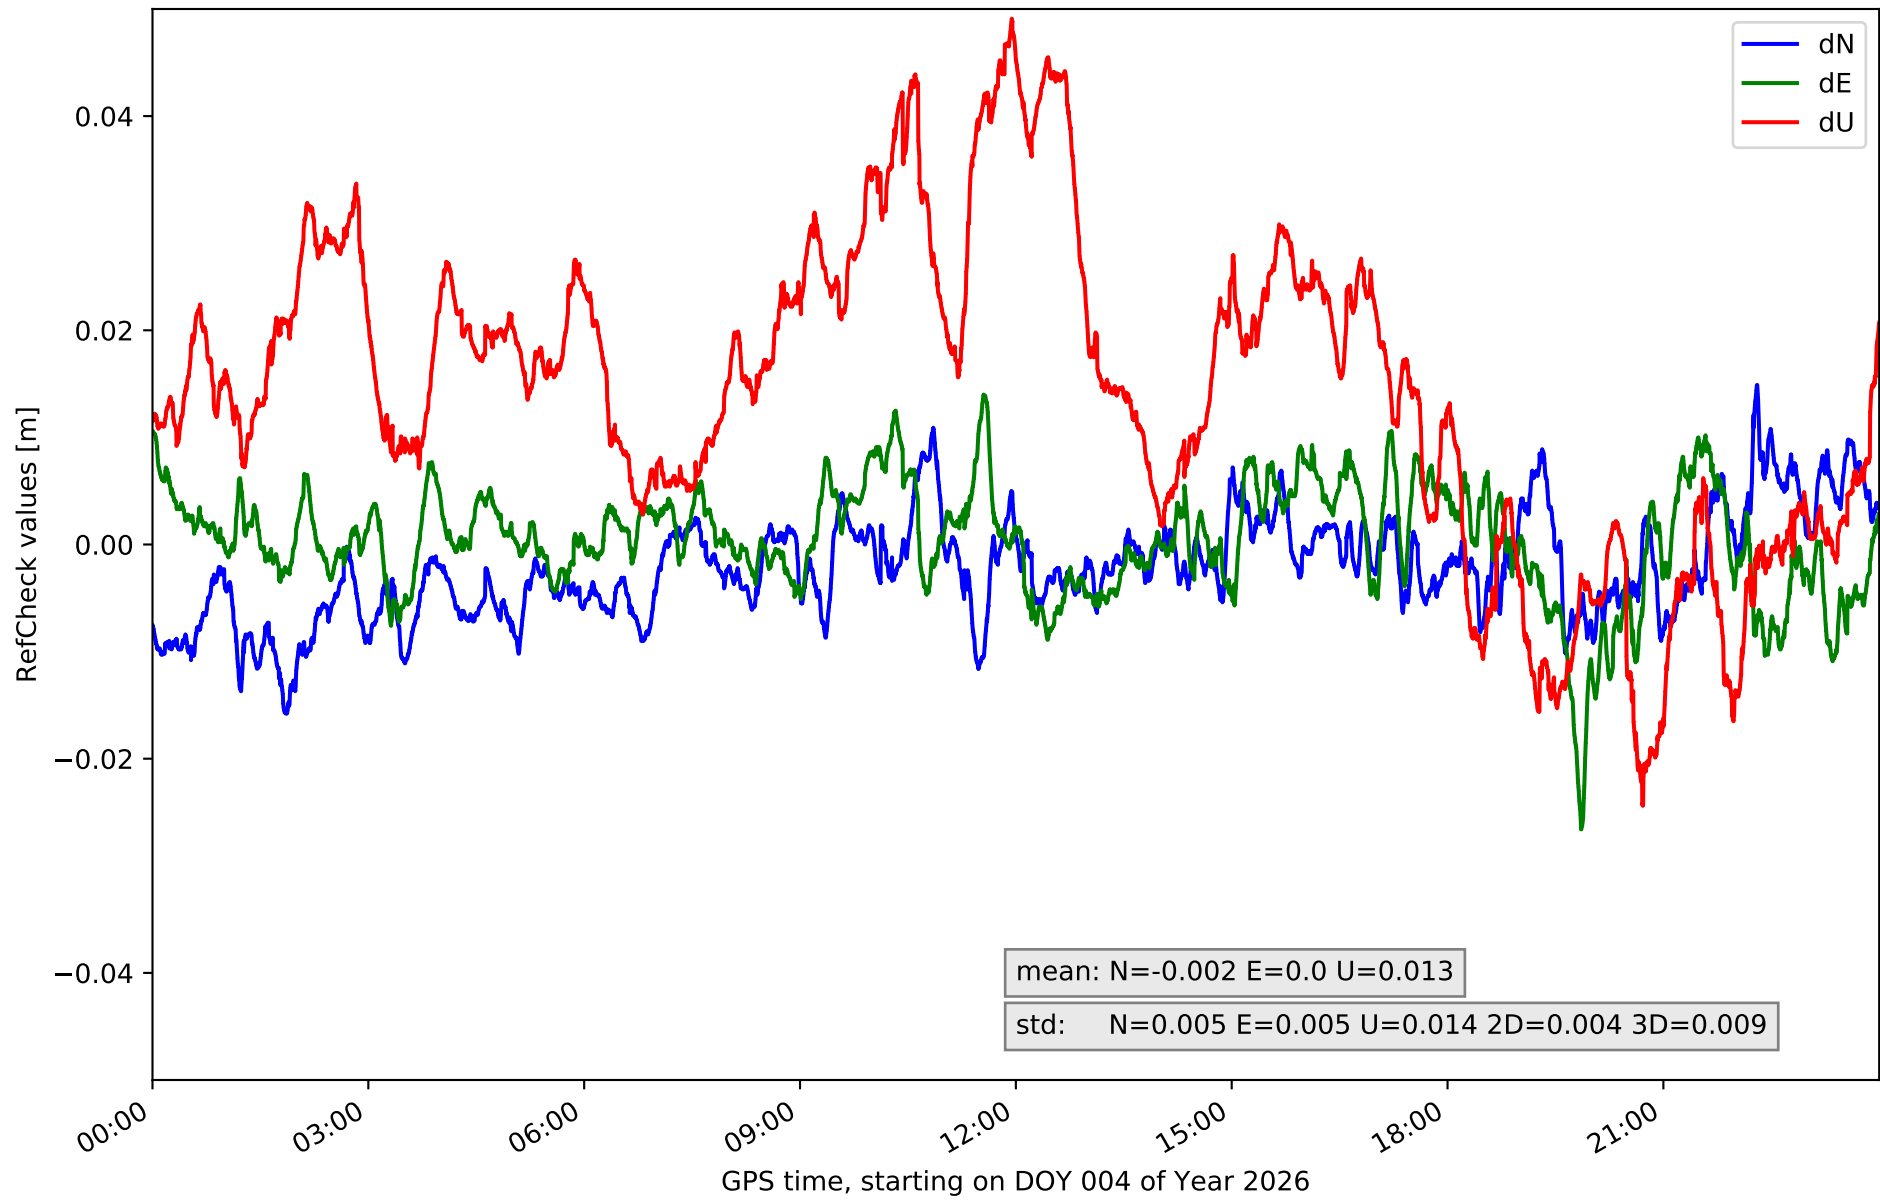


RefCheck for station IZAN in network N32T

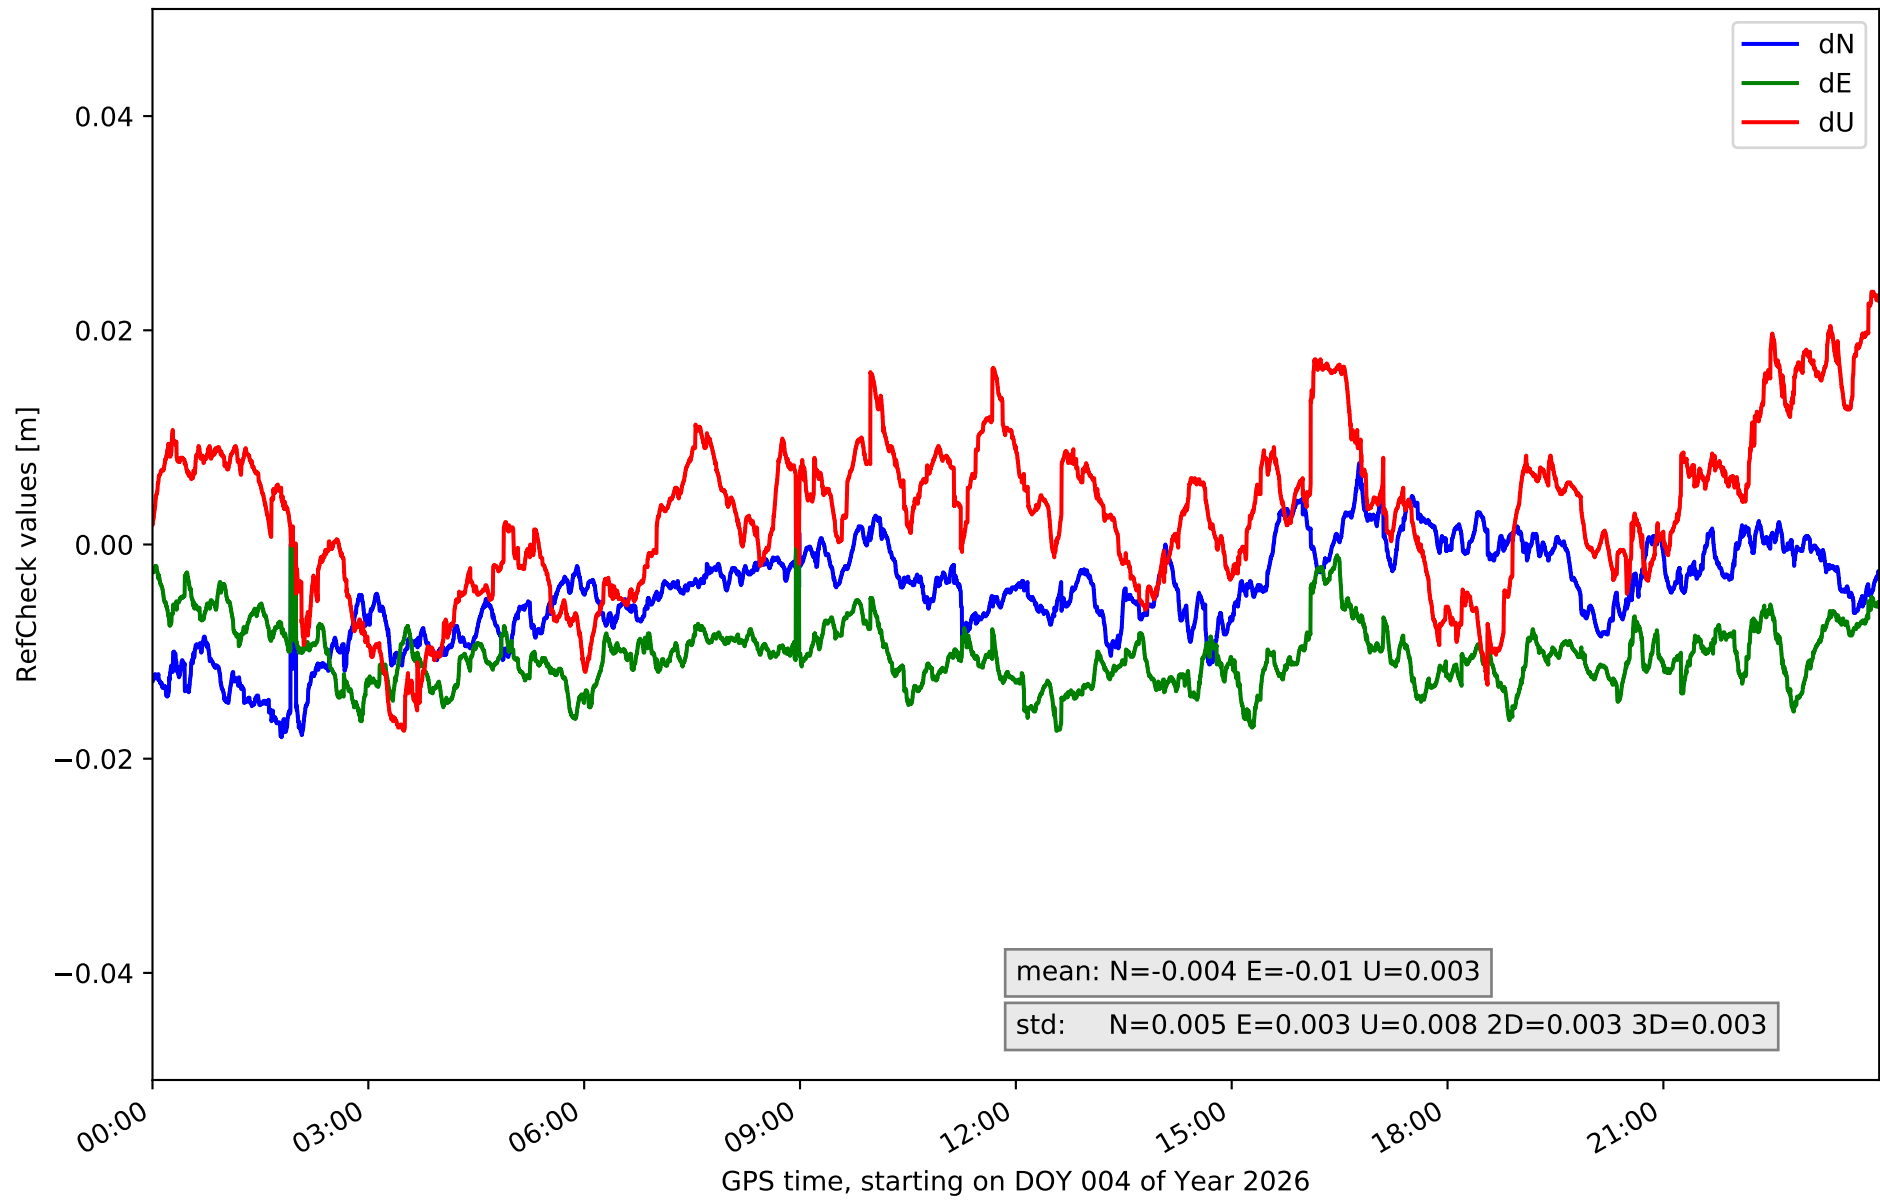


RefCheck for station LP01 in network N32T

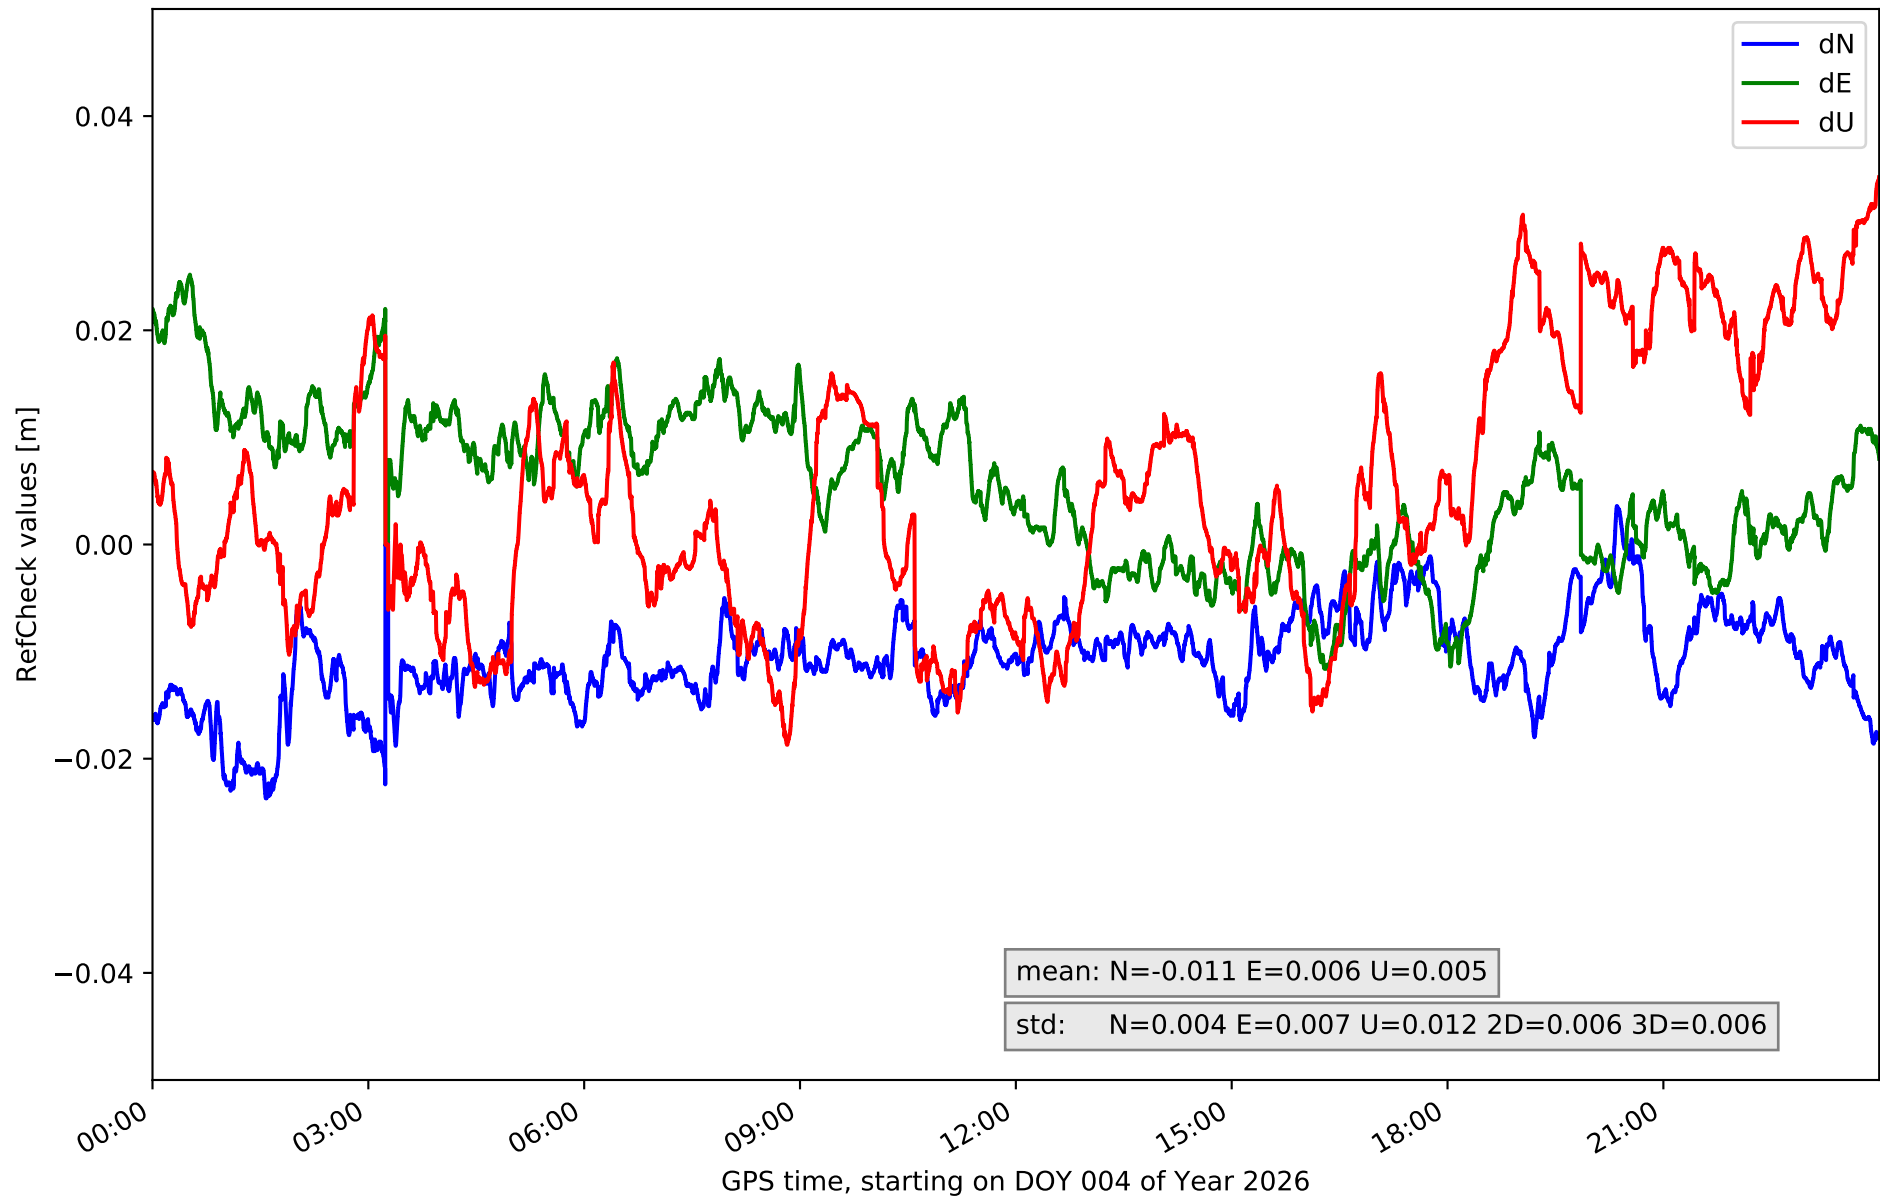


RefCheck for station LP03 in network N32T

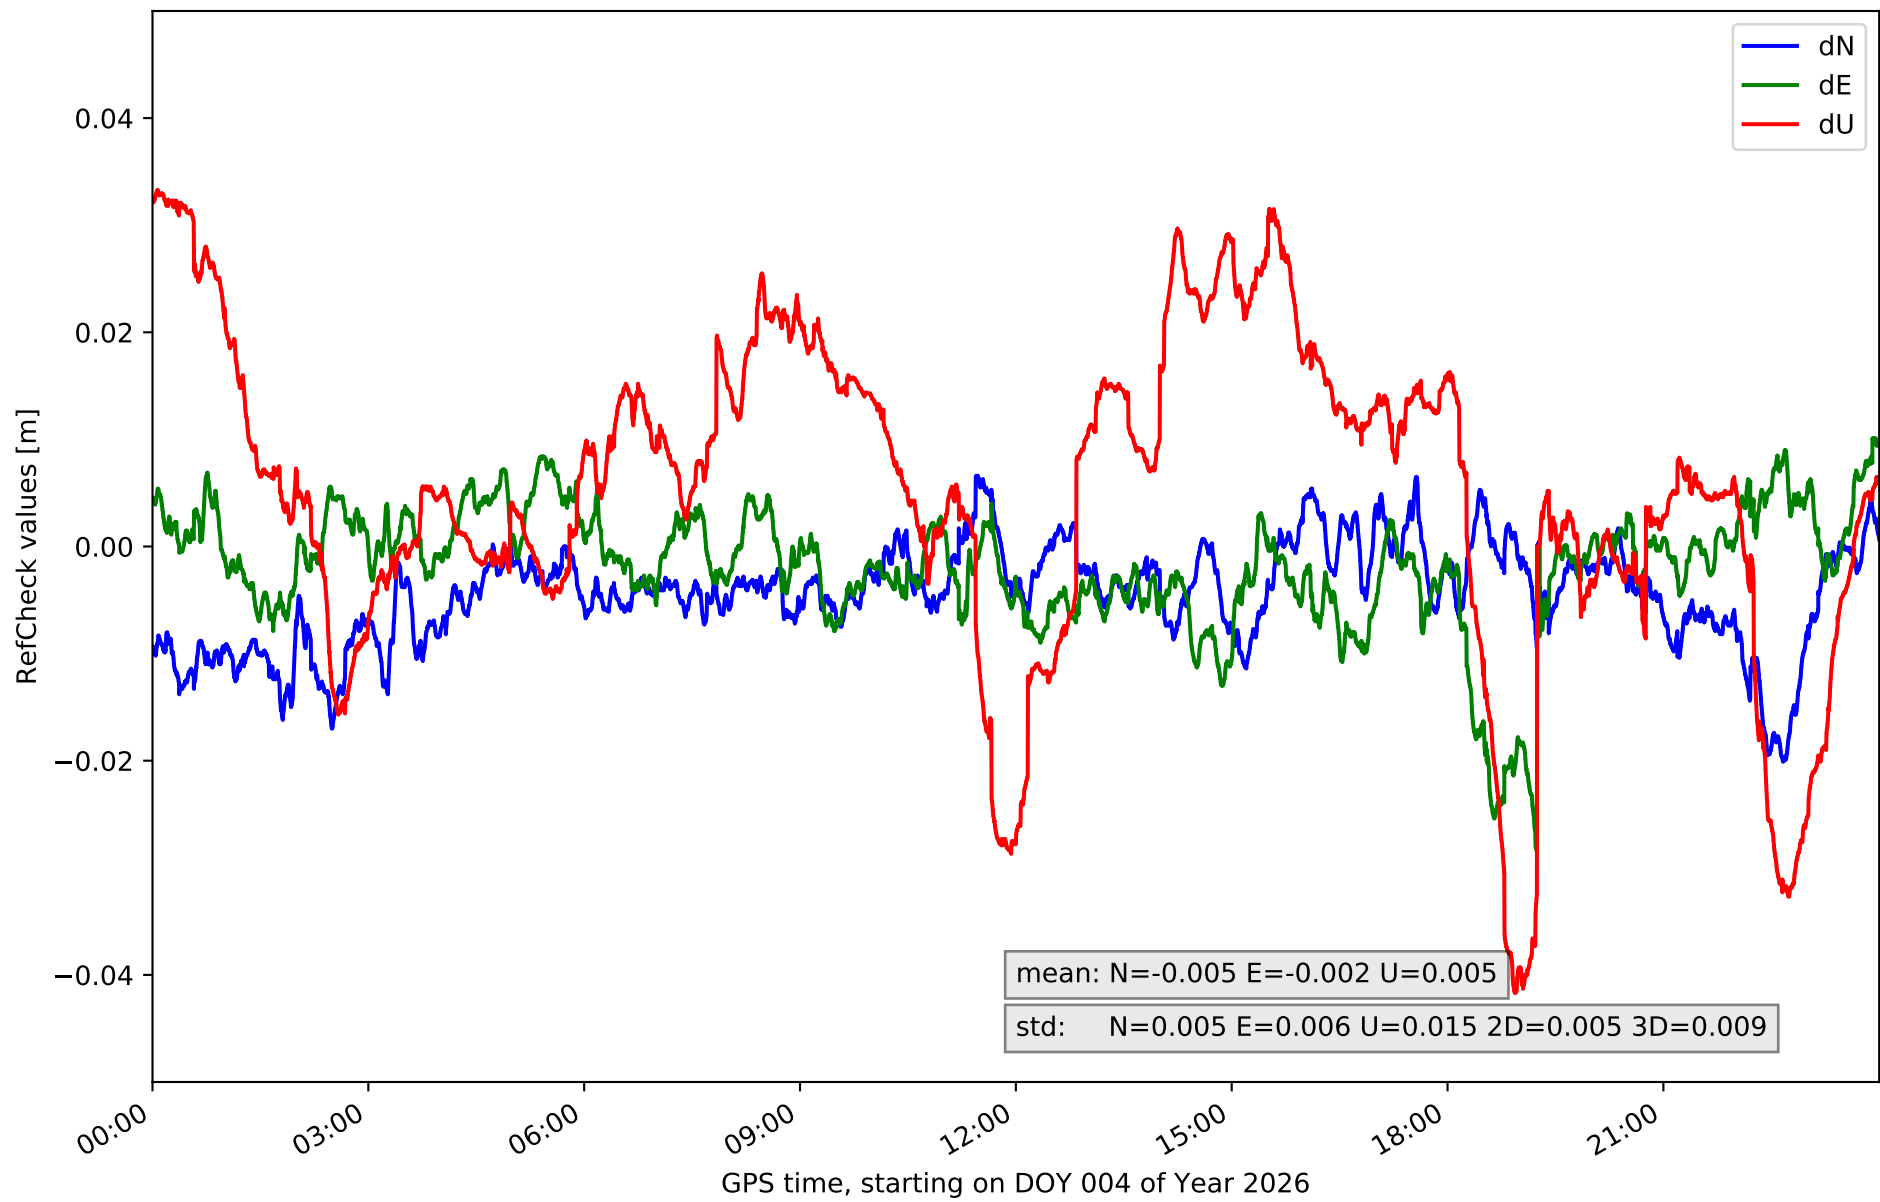


RefCheck for station LPAL in network N32T

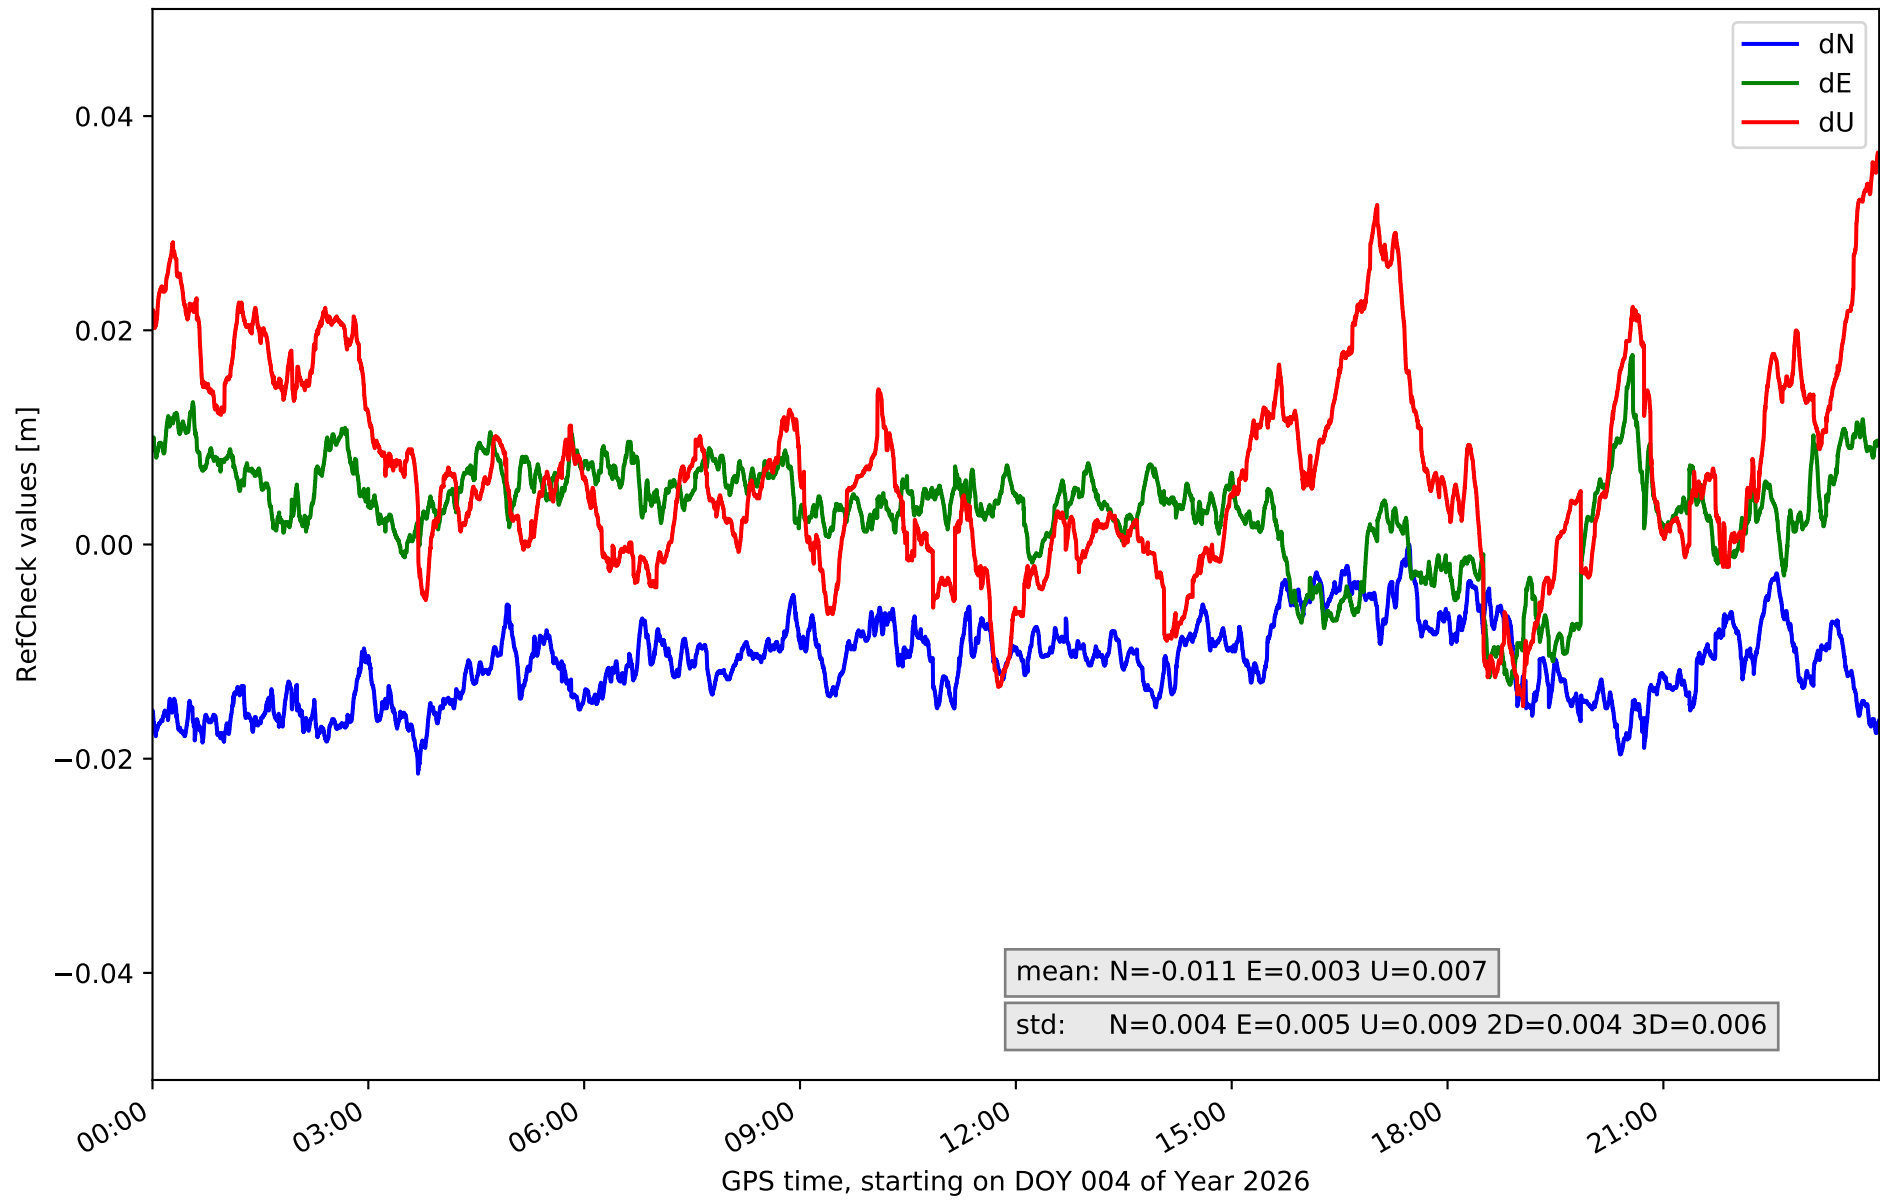


RefCheck for station LRES in network N32T

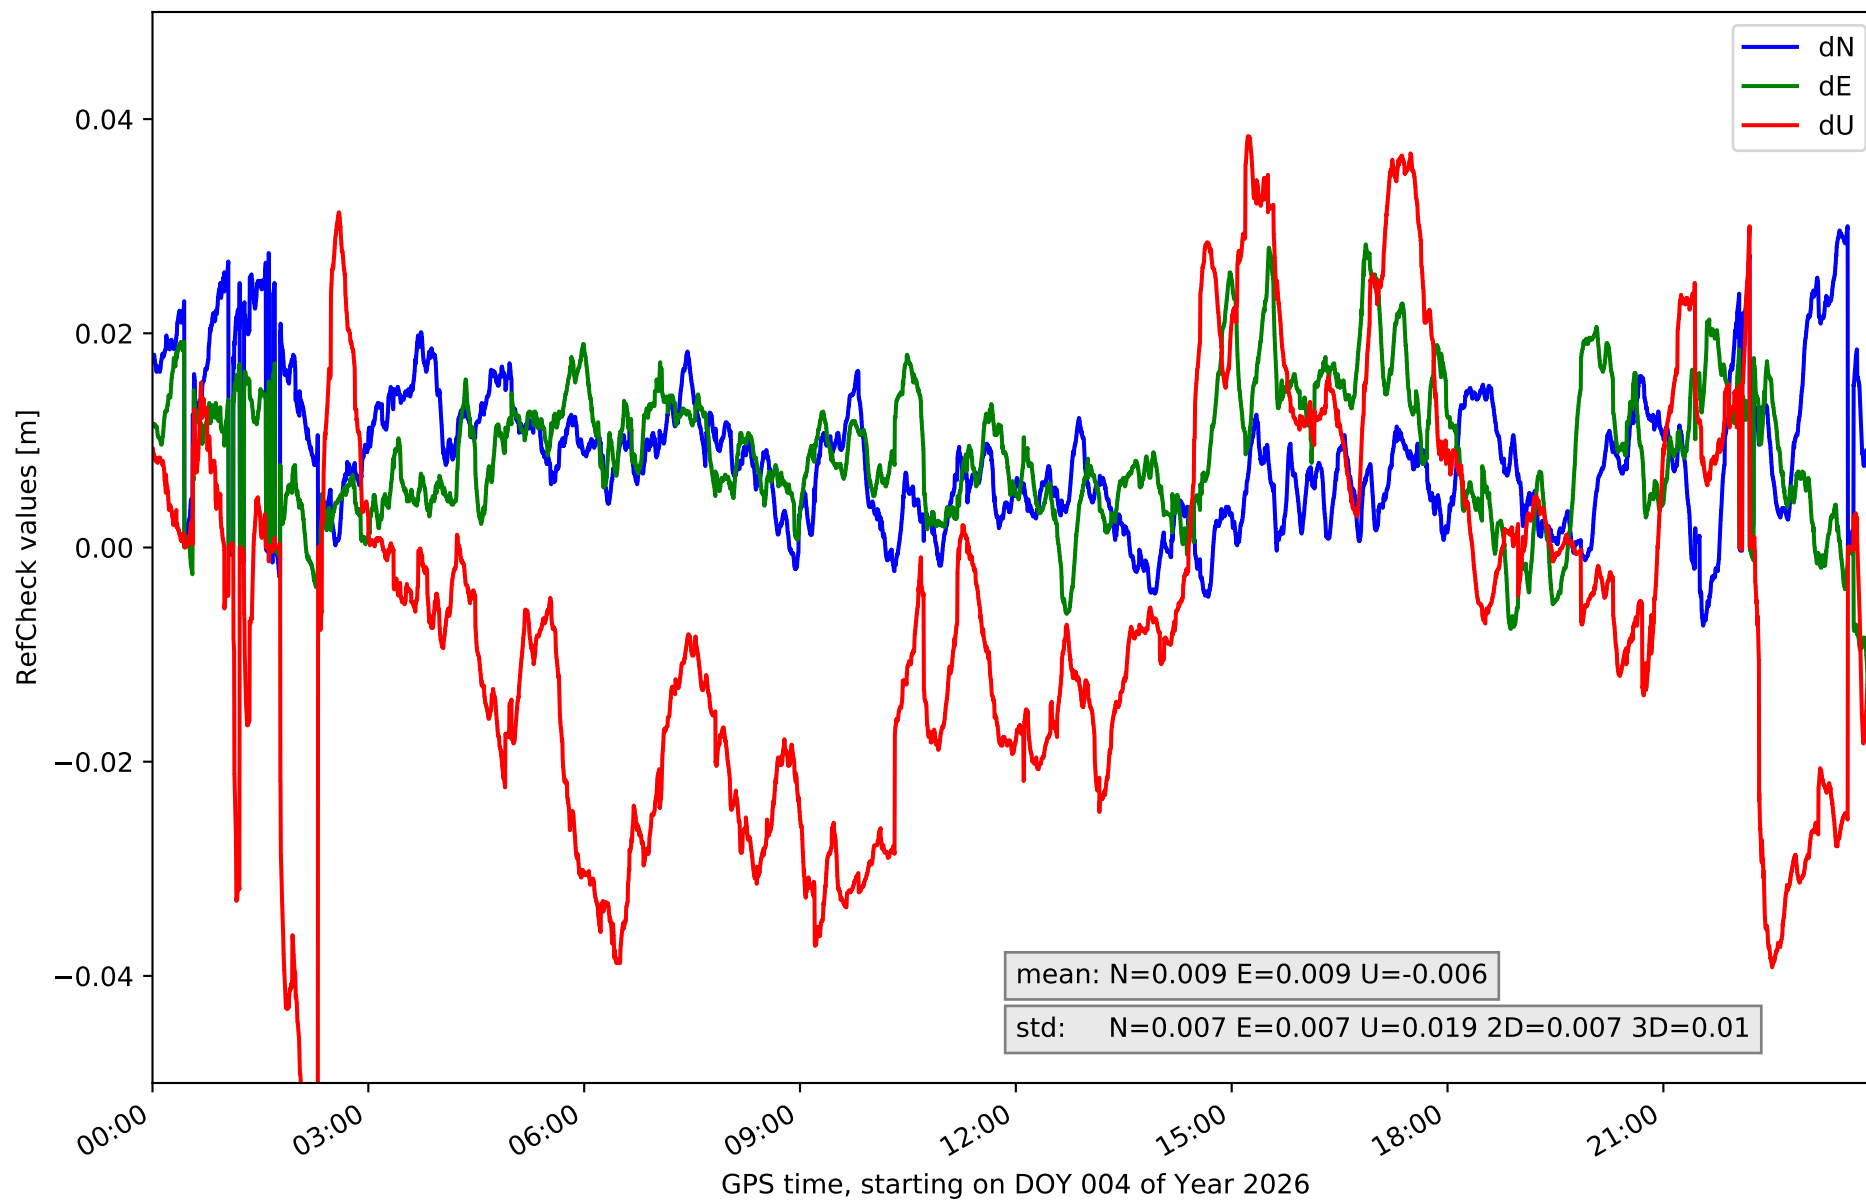


RefCheck for station TN01 in network N32T

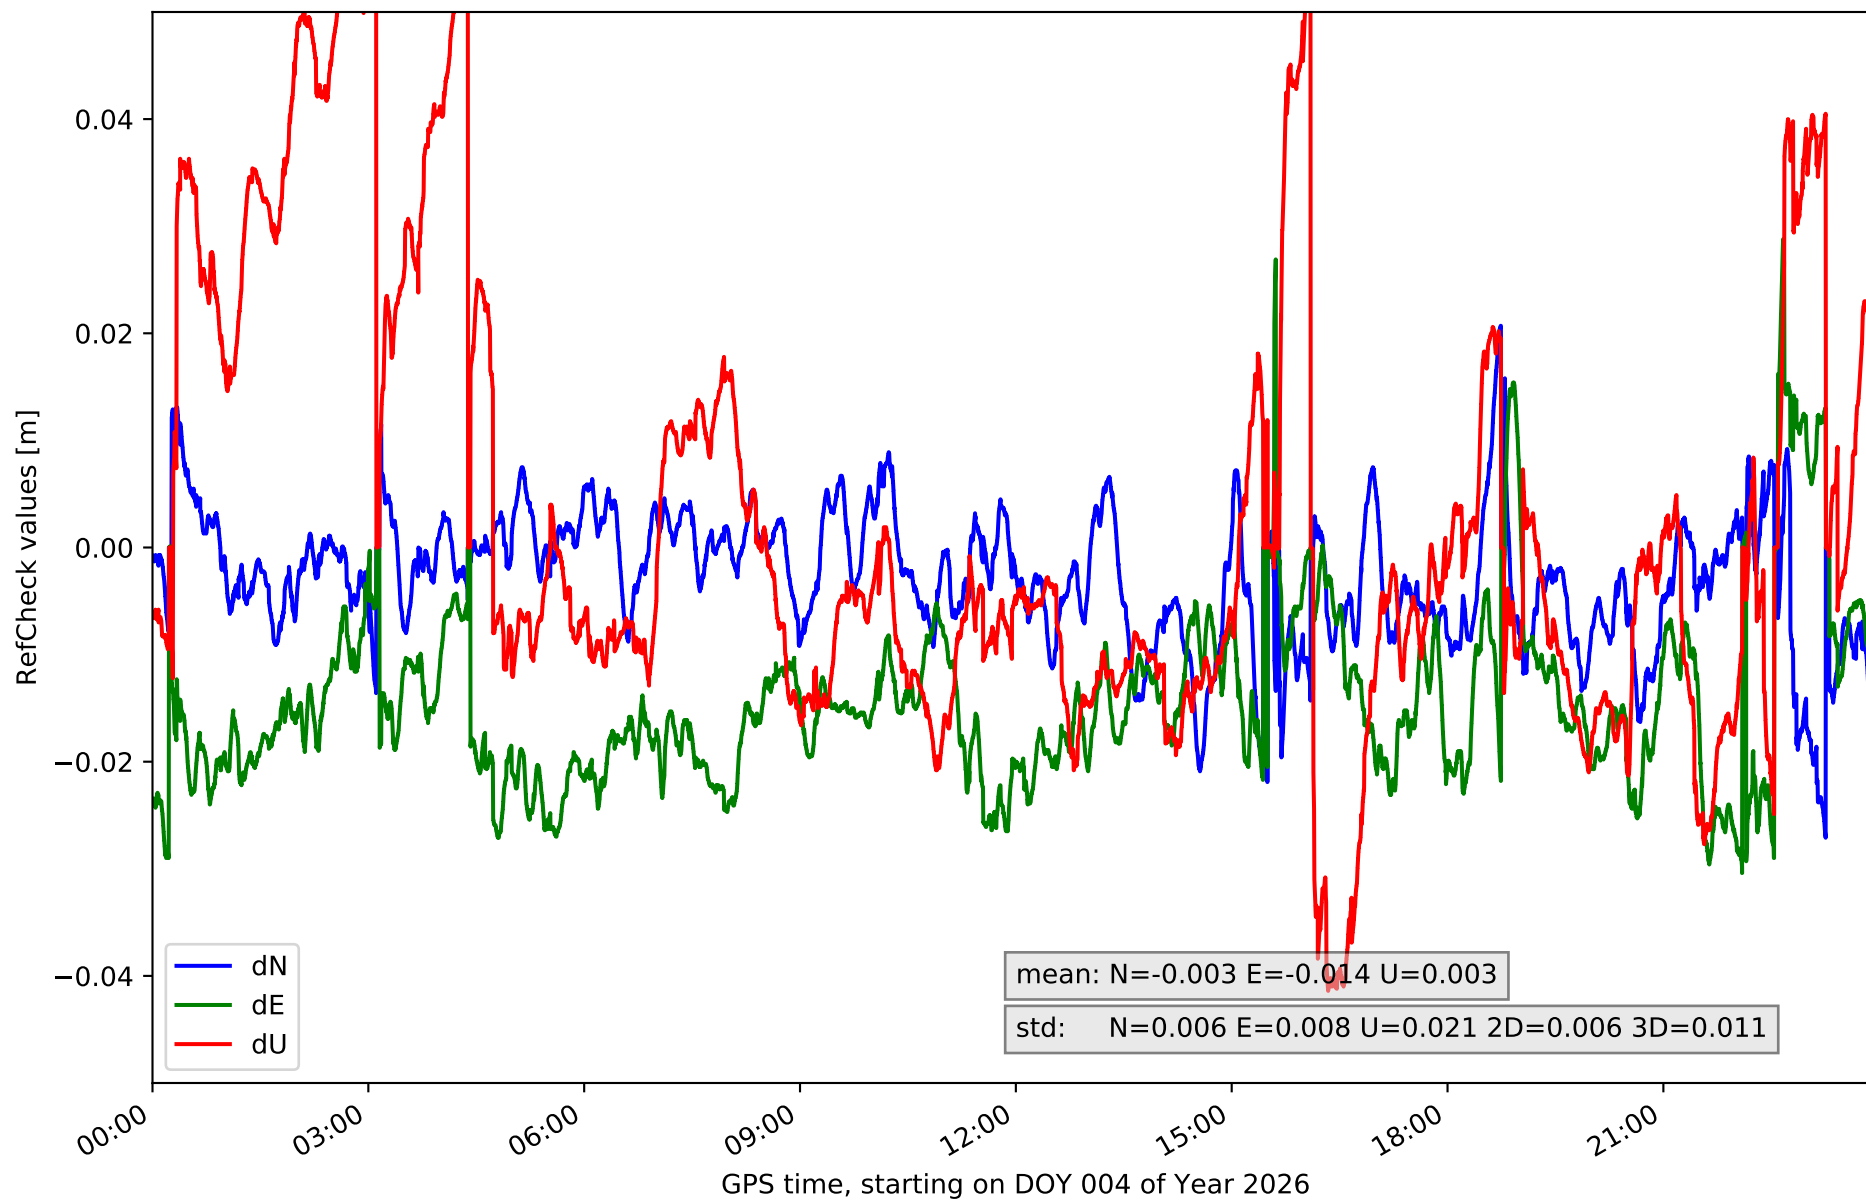


RefCheck for station TN02 in network N32T

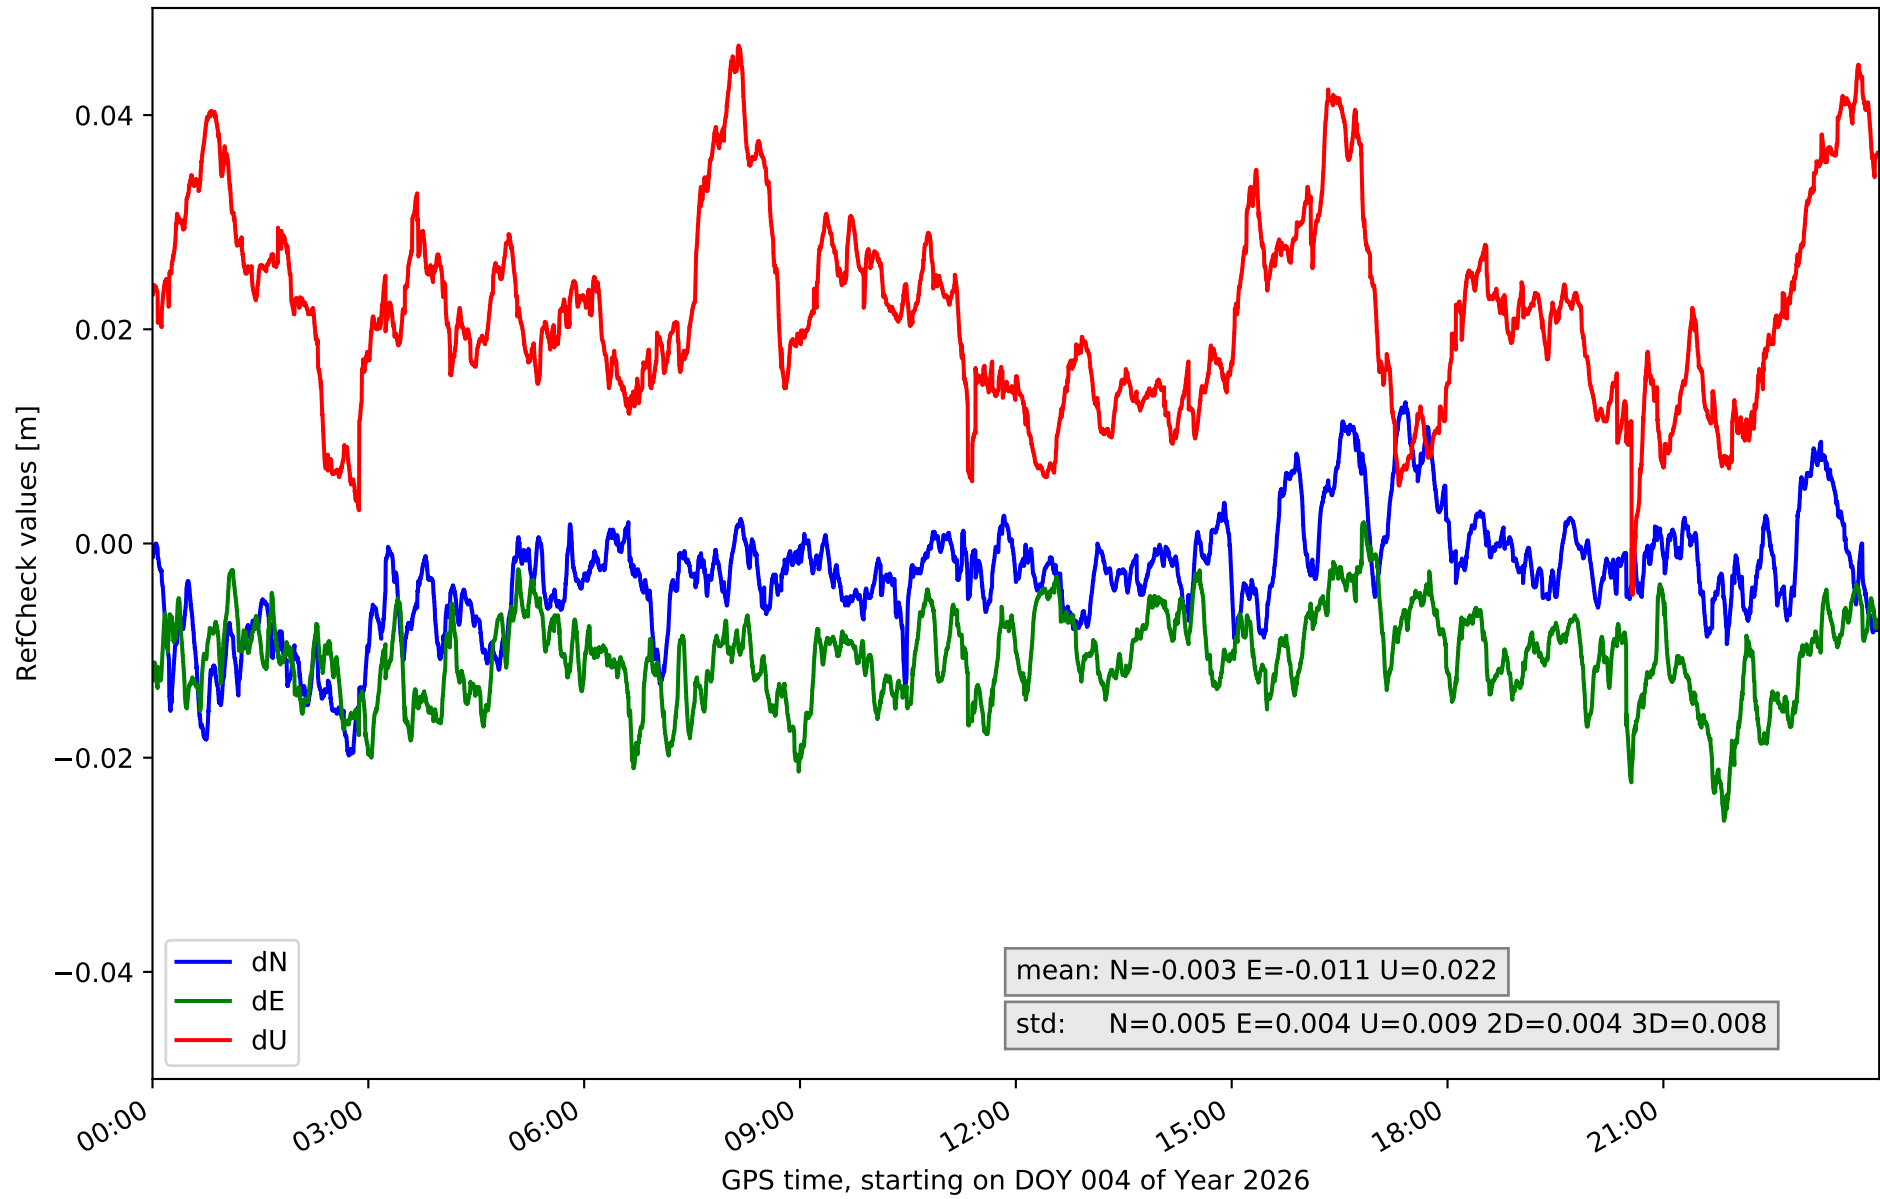


RefCheck for station TN03 in network N32T

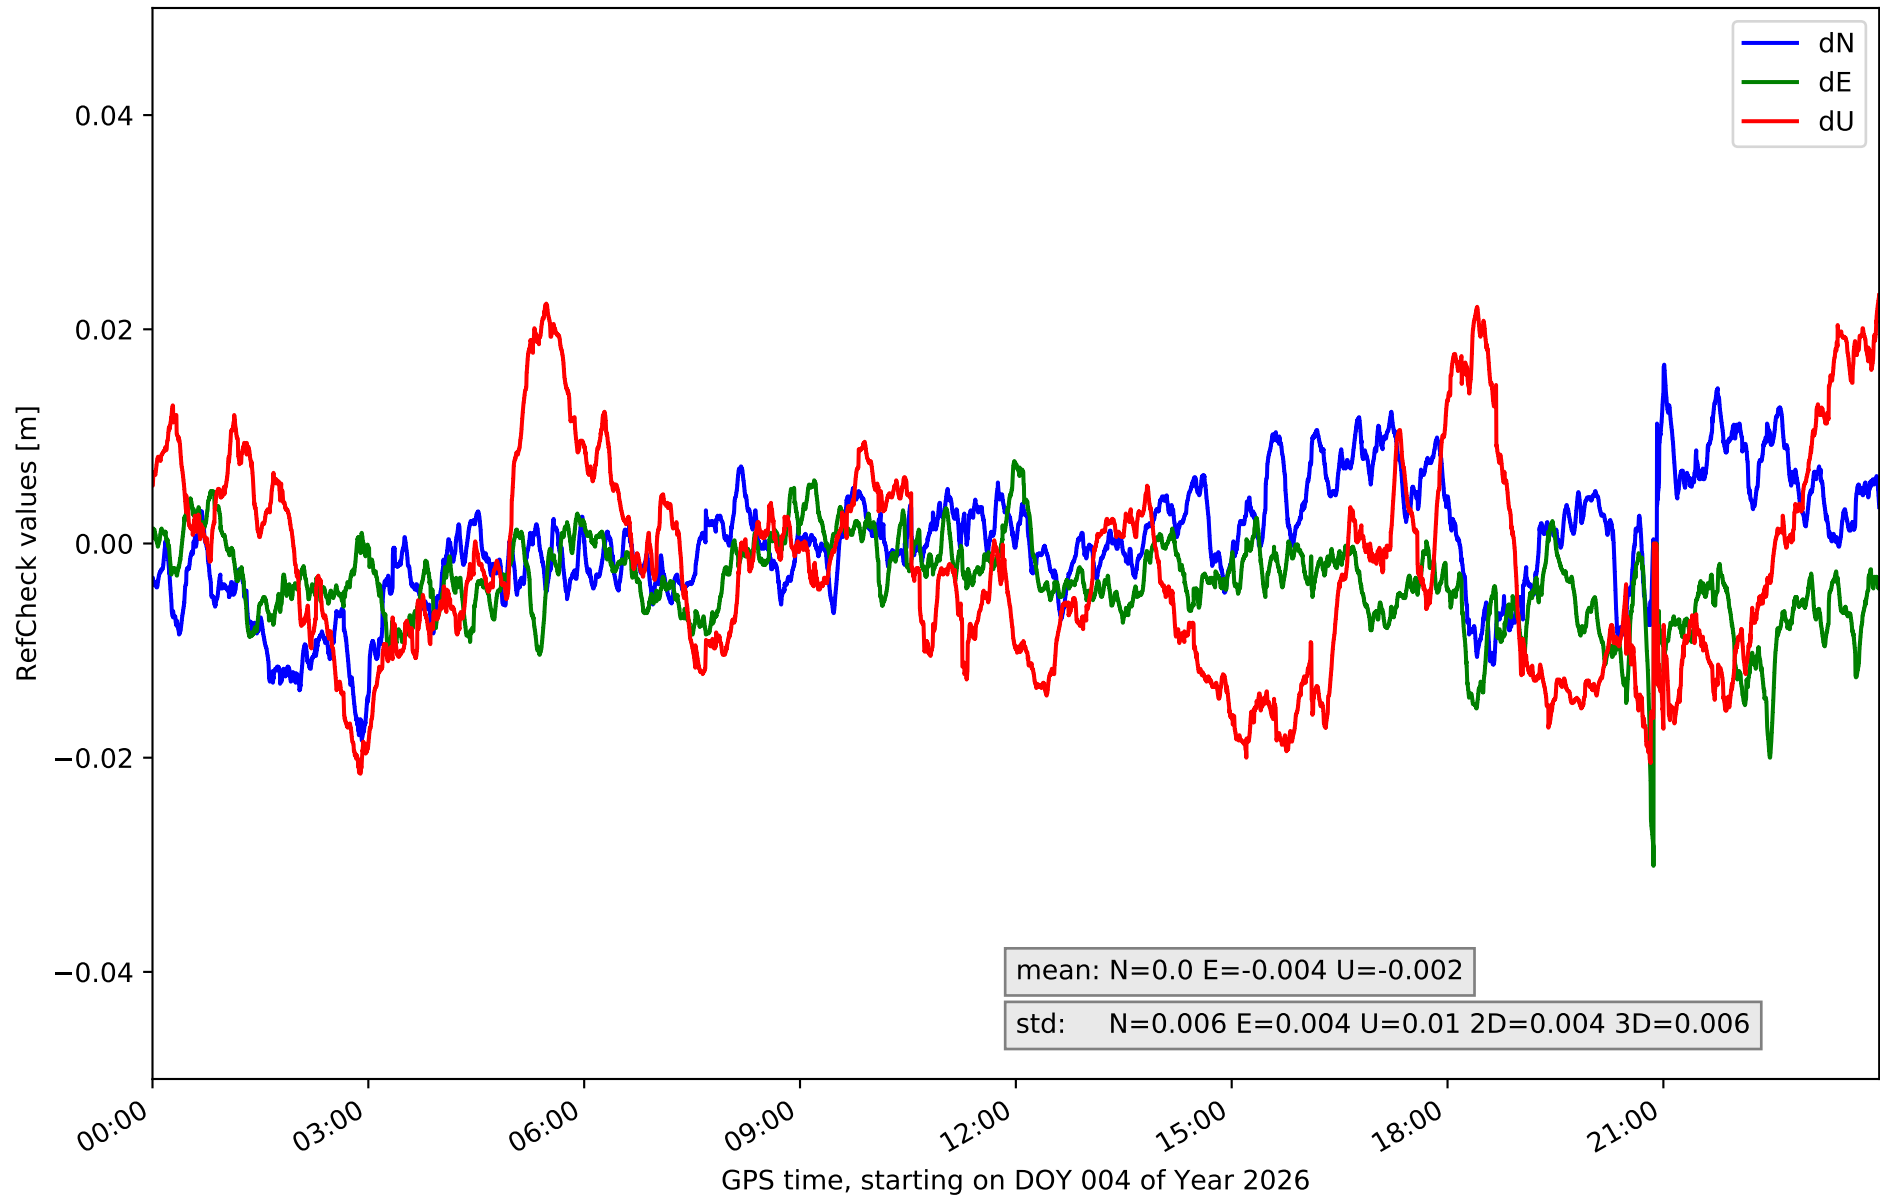


RefCheck for station TN06 in network N32T

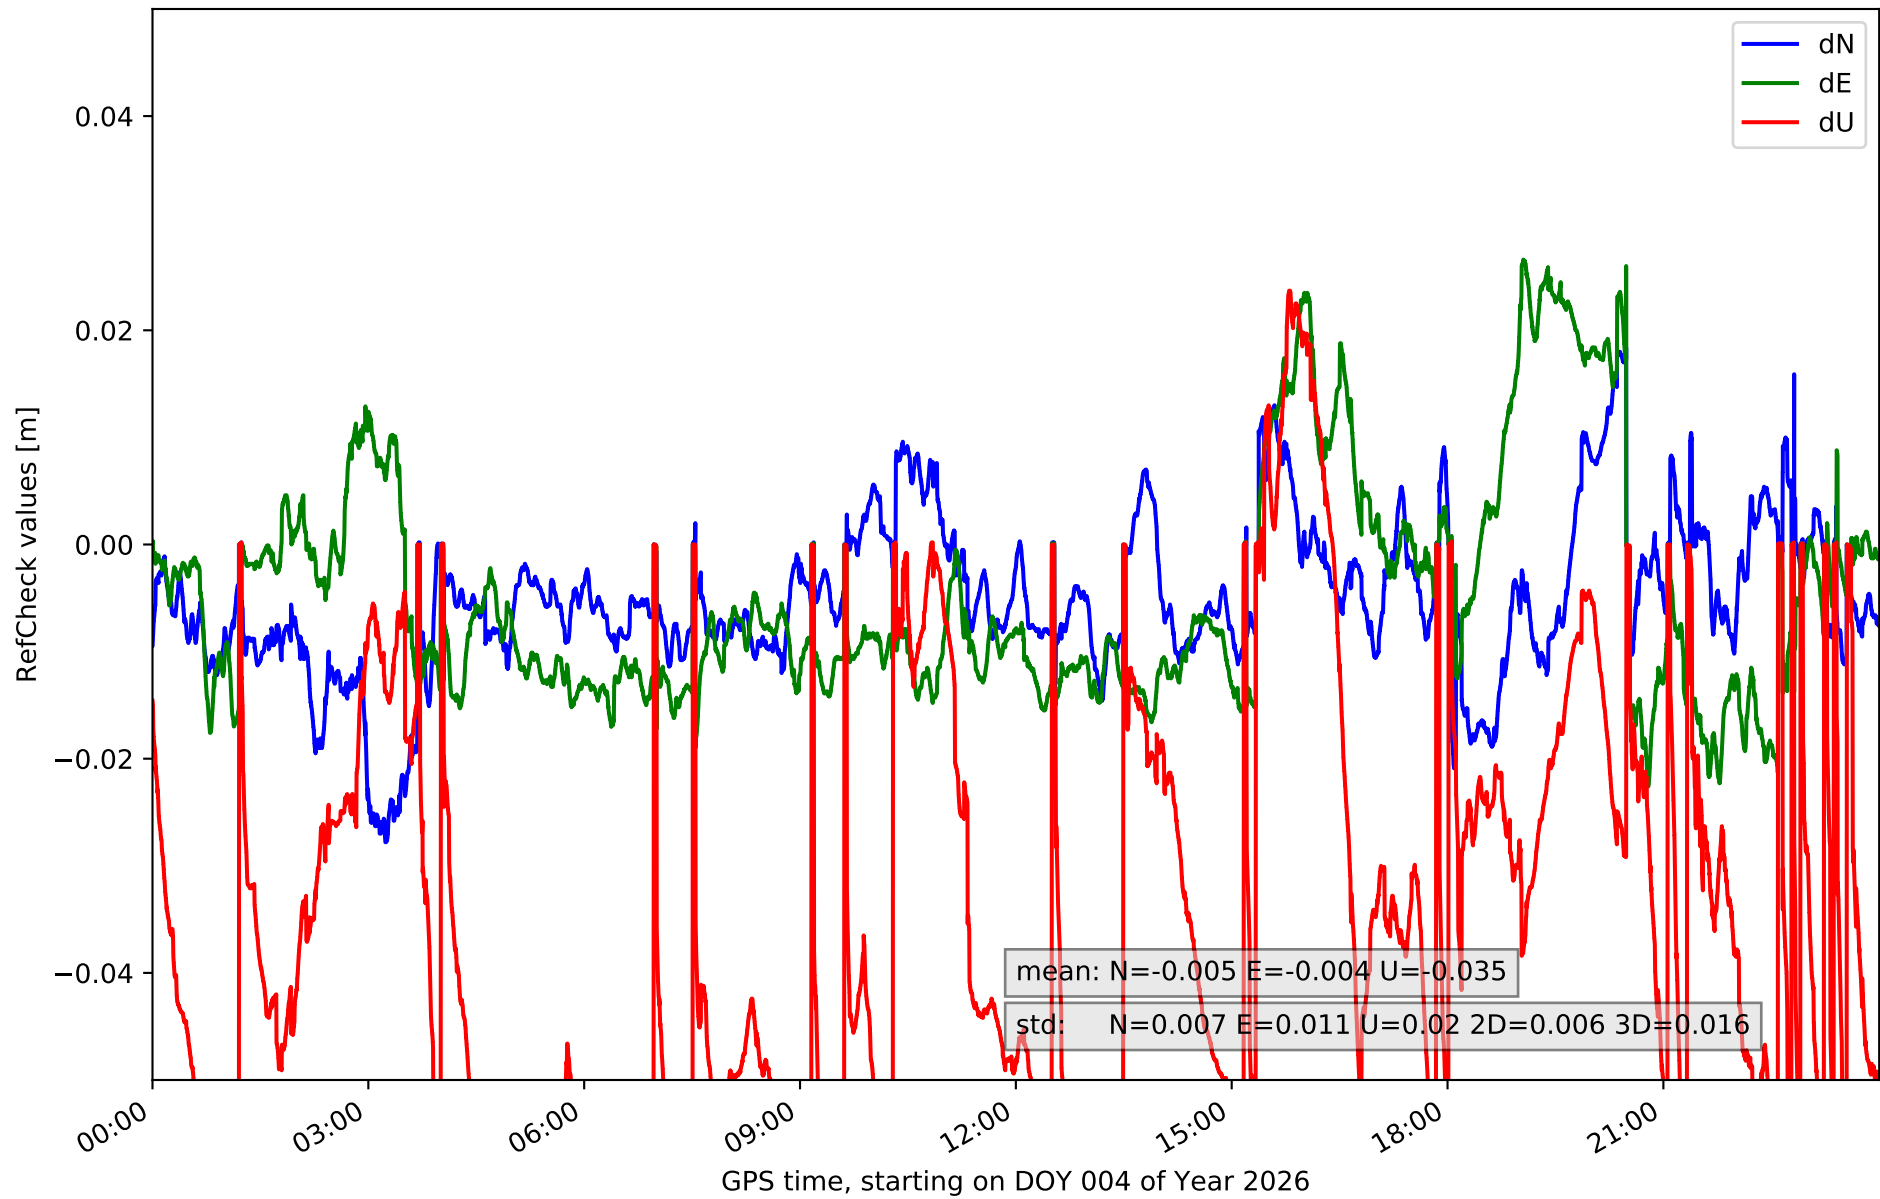

RefCheck for station TN09 in network N32T

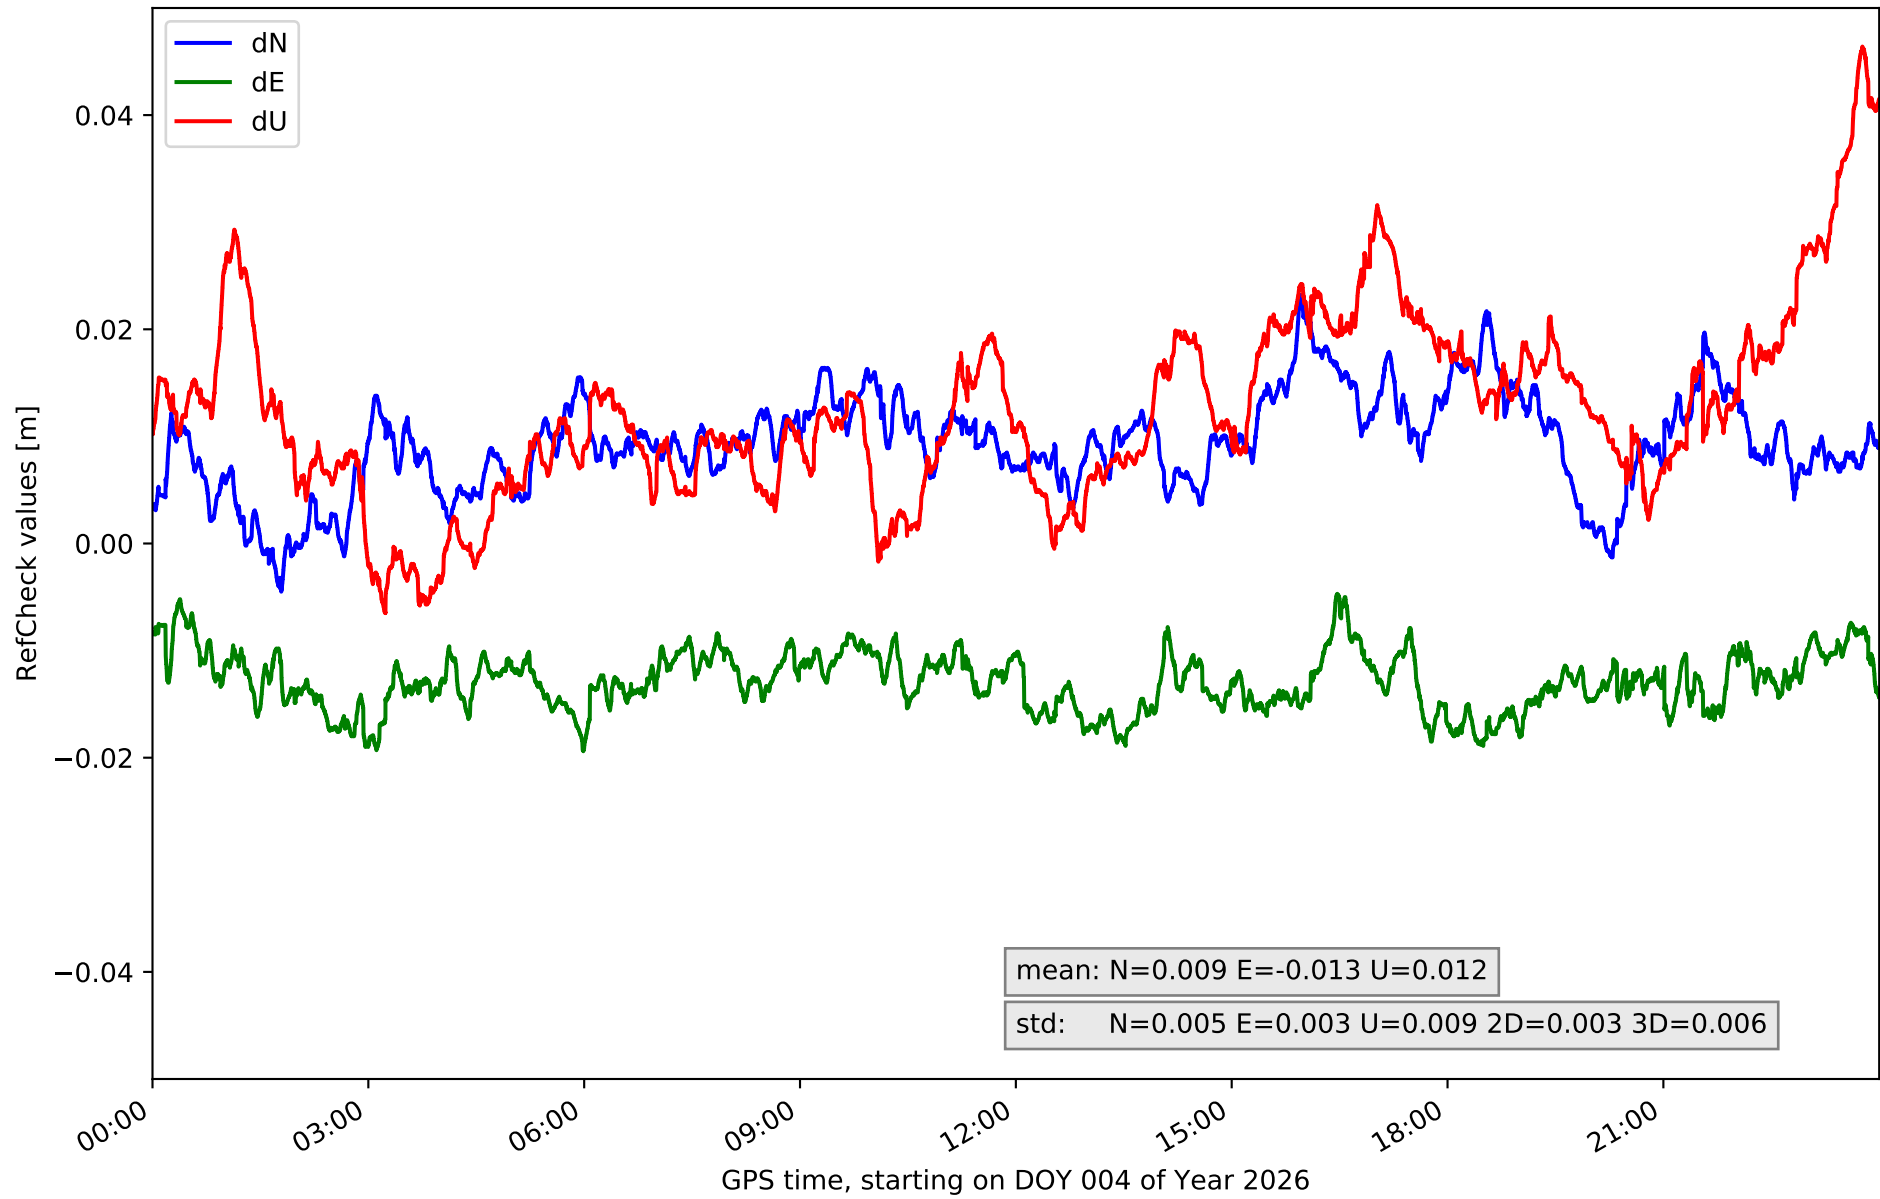

RefCheck for station TE11 in network N32T

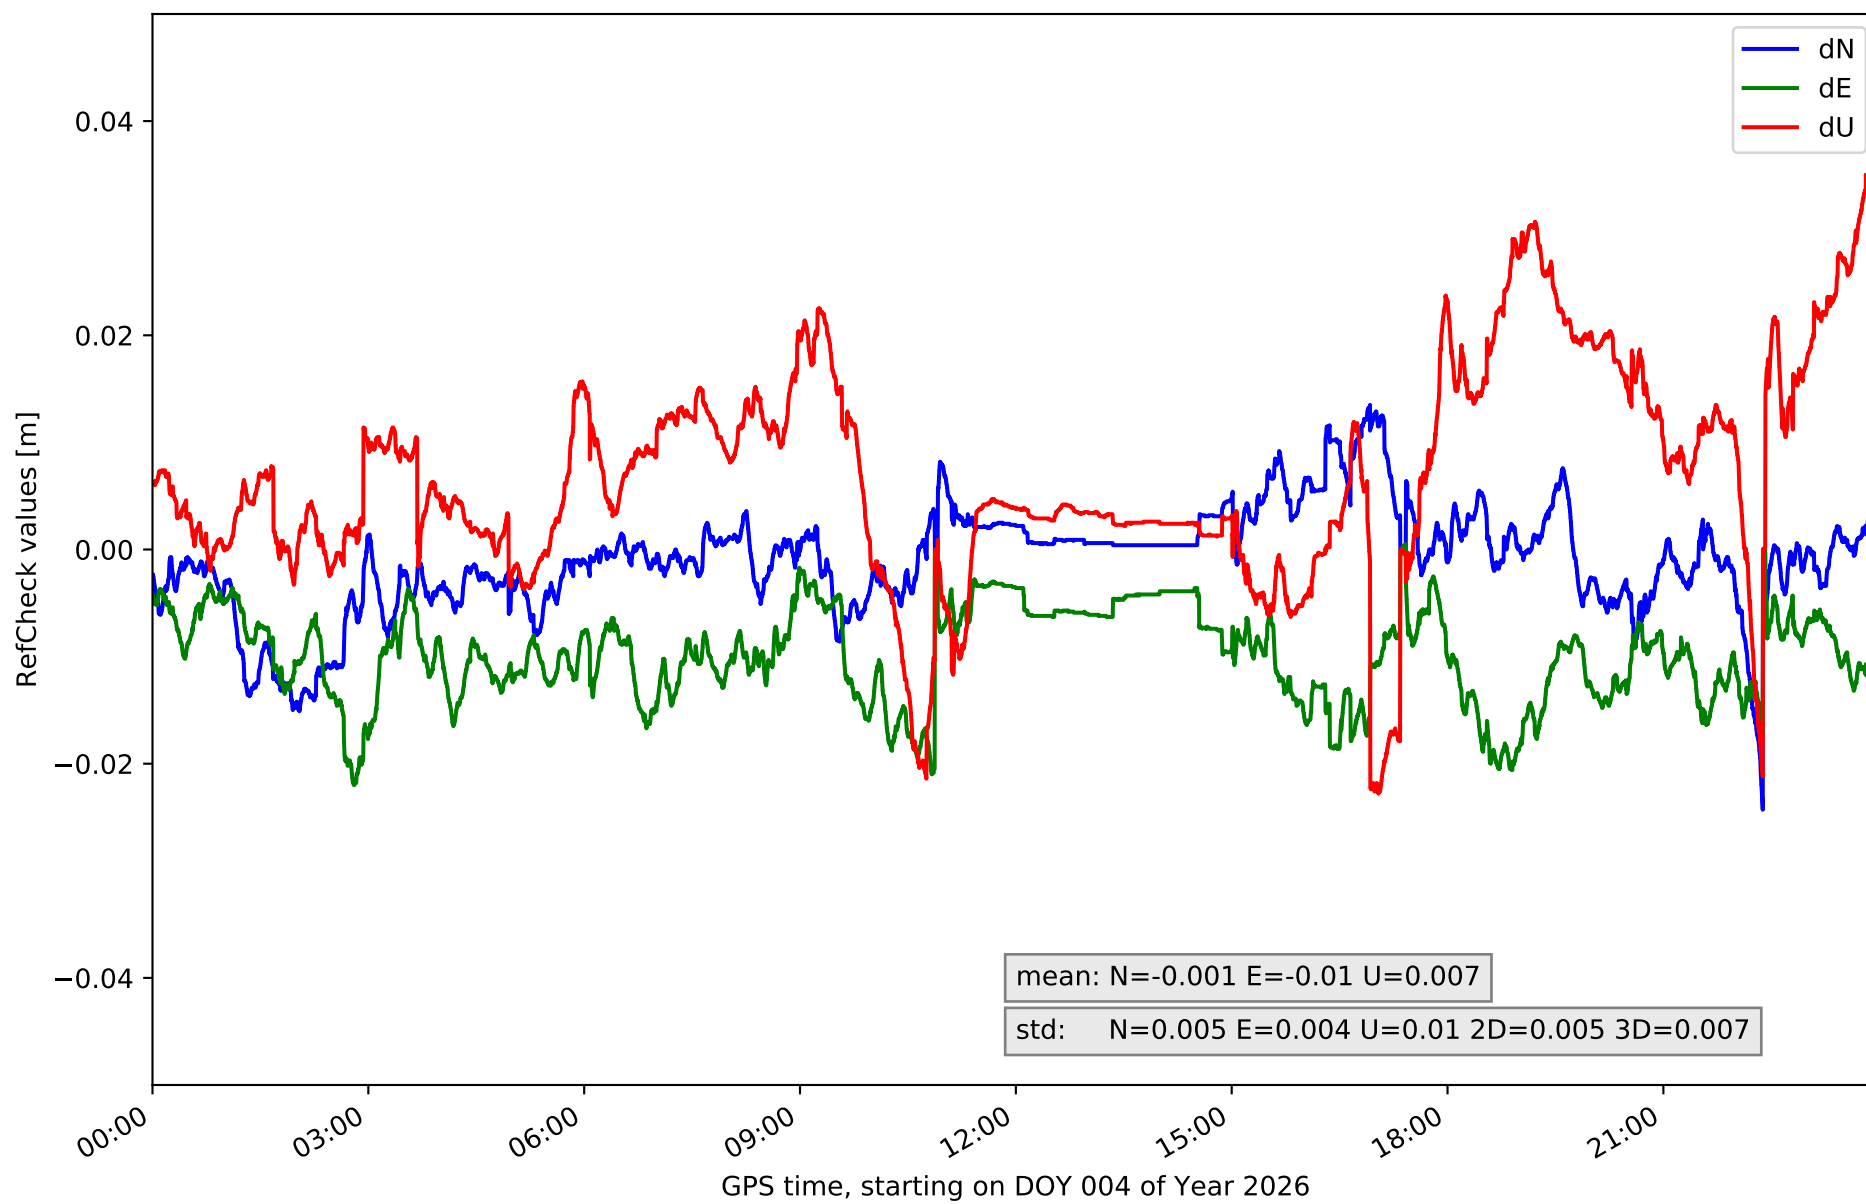

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.014	0.017	0.006	-0.004	0.026	0.005	-0.06	0.047	0.016	0.004	0.008	65681	93.4	33701	47.9
EH02	-0.029	0.031	0.007	-0.011	0.049	0.008	-0.06	0.061	0.023	0.006	0.016	66028	93.8	60794	86.4
GOM1	-0.026	0.009	0.006	-0.02	0.029	0.009	-0.016	0.06	0.012	0.006	0.009	41708	59.3	28000	39.8
GOME	-0.016	0.015	0.005	-0.027	0.014	0.005	-0.024	0.049	0.014	0.004	0.009	10529	15.0	27894	39.6
IZAN	-0.018	0.008	0.005	-0.017	0.0	0.003	-0.017	0.024	0.008	0.003	0.003	51795	73.6	3798	5.4
LP01	-0.024	0.004	0.004	-0.012	0.025	0.007	-0.019	0.034	0.012	0.006	0.006	51232	72.8	26832	38.1
LP03	-0.02	0.007	0.005	-0.029	0.01	0.006	-0.042	0.033	0.015	0.005	0.009	15412	21.9	17921	25.5
LPAL	-0.021	0.0	0.004	-0.013	0.018	0.005	-0.015	0.037	0.009	0.004	0.006	49907	70.9	15728	22.4
LRES	-0.007	0.03	0.007	-0.017	0.028	0.007	-0.06	0.038	0.019	0.007	0.01	50542	71.8	40863	58.1
TN01	-0.027	0.021	0.006	-0.03	0.029	0.008	-0.041	0.061	0.021	0.006	0.011	62802	89.3	46505	66.1
TN02	-0.02	0.013	0.005	-0.026	0.002	0.004	-0.005	0.046	0.009	0.004	0.008	49452	70.3	54580	77.6
TN03	-0.018	0.017	0.006	-0.03	0.008	0.004	-0.021	0.023	0.01	0.004	0.006	15163	21.6	5446	7.7
TN06	-0.028	0.018	0.007	-0.023	0.027	0.011	-0.062	0.024	0.02	0.006	0.016	51351	73.0	62398	88.7
TN09	-0.004	0.023	0.005	-0.019	-0.005	0.003	-0.006	0.046	0.009	0.003	0.006	69607	98.9	36666	52.1
TE11	-0.024	0.013	0.005	-0.022	0.001	0.004	-0.023	0.035	0.01	0.005	0.007	41412	58.9	17693	25.1
Mean	-0.02	0.015	0.006	-0.02	0.017	0.006	-0.031	0.041	0.014	0.005	0.009	46174.7	65.6	31921.3	45.4
Min/Max	-0.029	0.031	0.007	-0.03	0.049	0.011	-0.062	0.061	0.023	0.007	0.016	69607	98.9	62398	88.7

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	89.4	90.8	87.2	91.4	87.4
considering satellites with dual-frequency fixed	84.7	85.8	80.4	87.5	82.6
considering all signals separately	84.9	85.6	80.4	88.0	81.6