

summary for network N32T

timeperiod chosen: from 2026-02-18-00:00:00 until 2026-02-18-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.4 seconds


average fixing percentage with threshold set to 0.3: 88.8 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: LEICA GR50	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

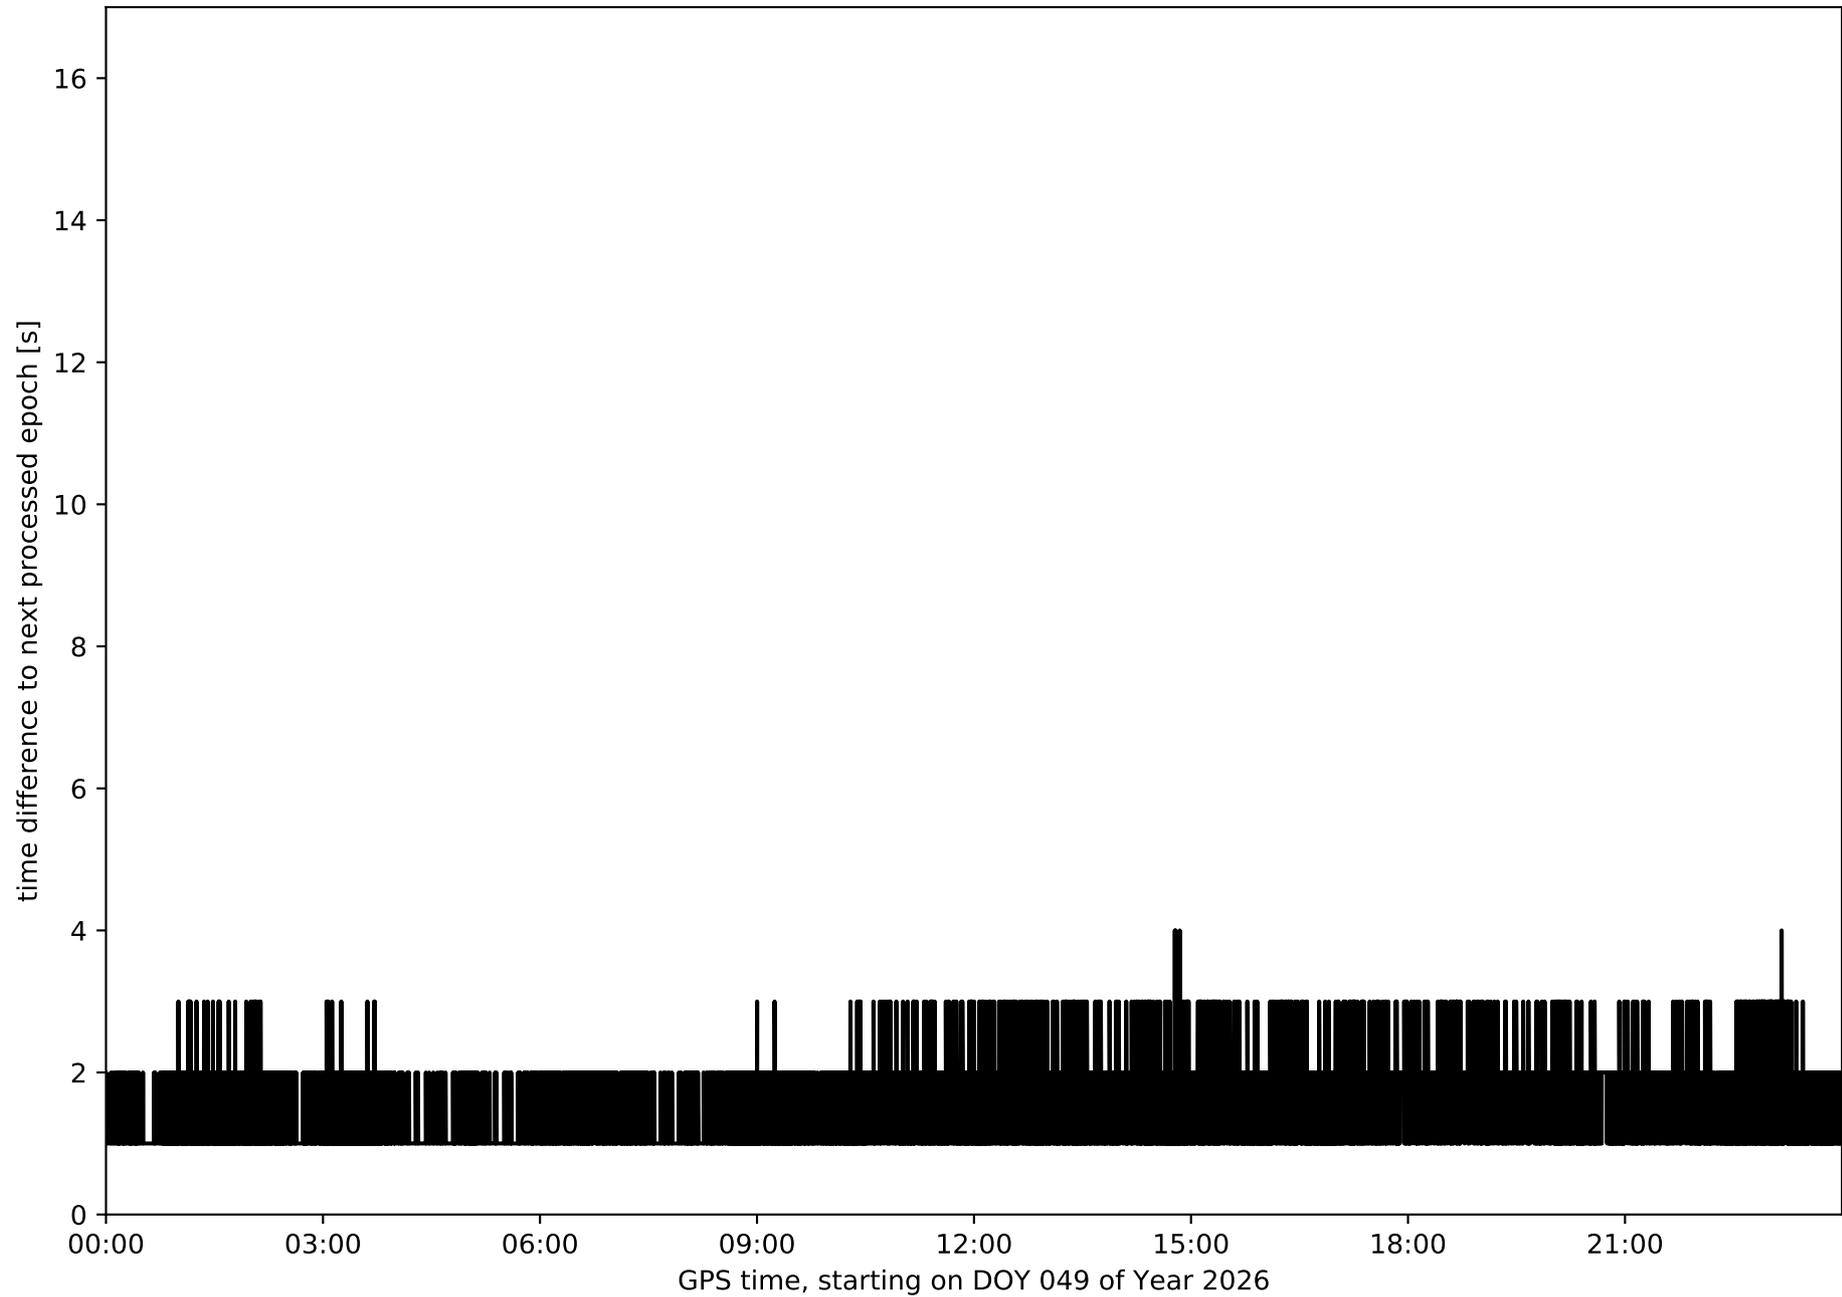


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

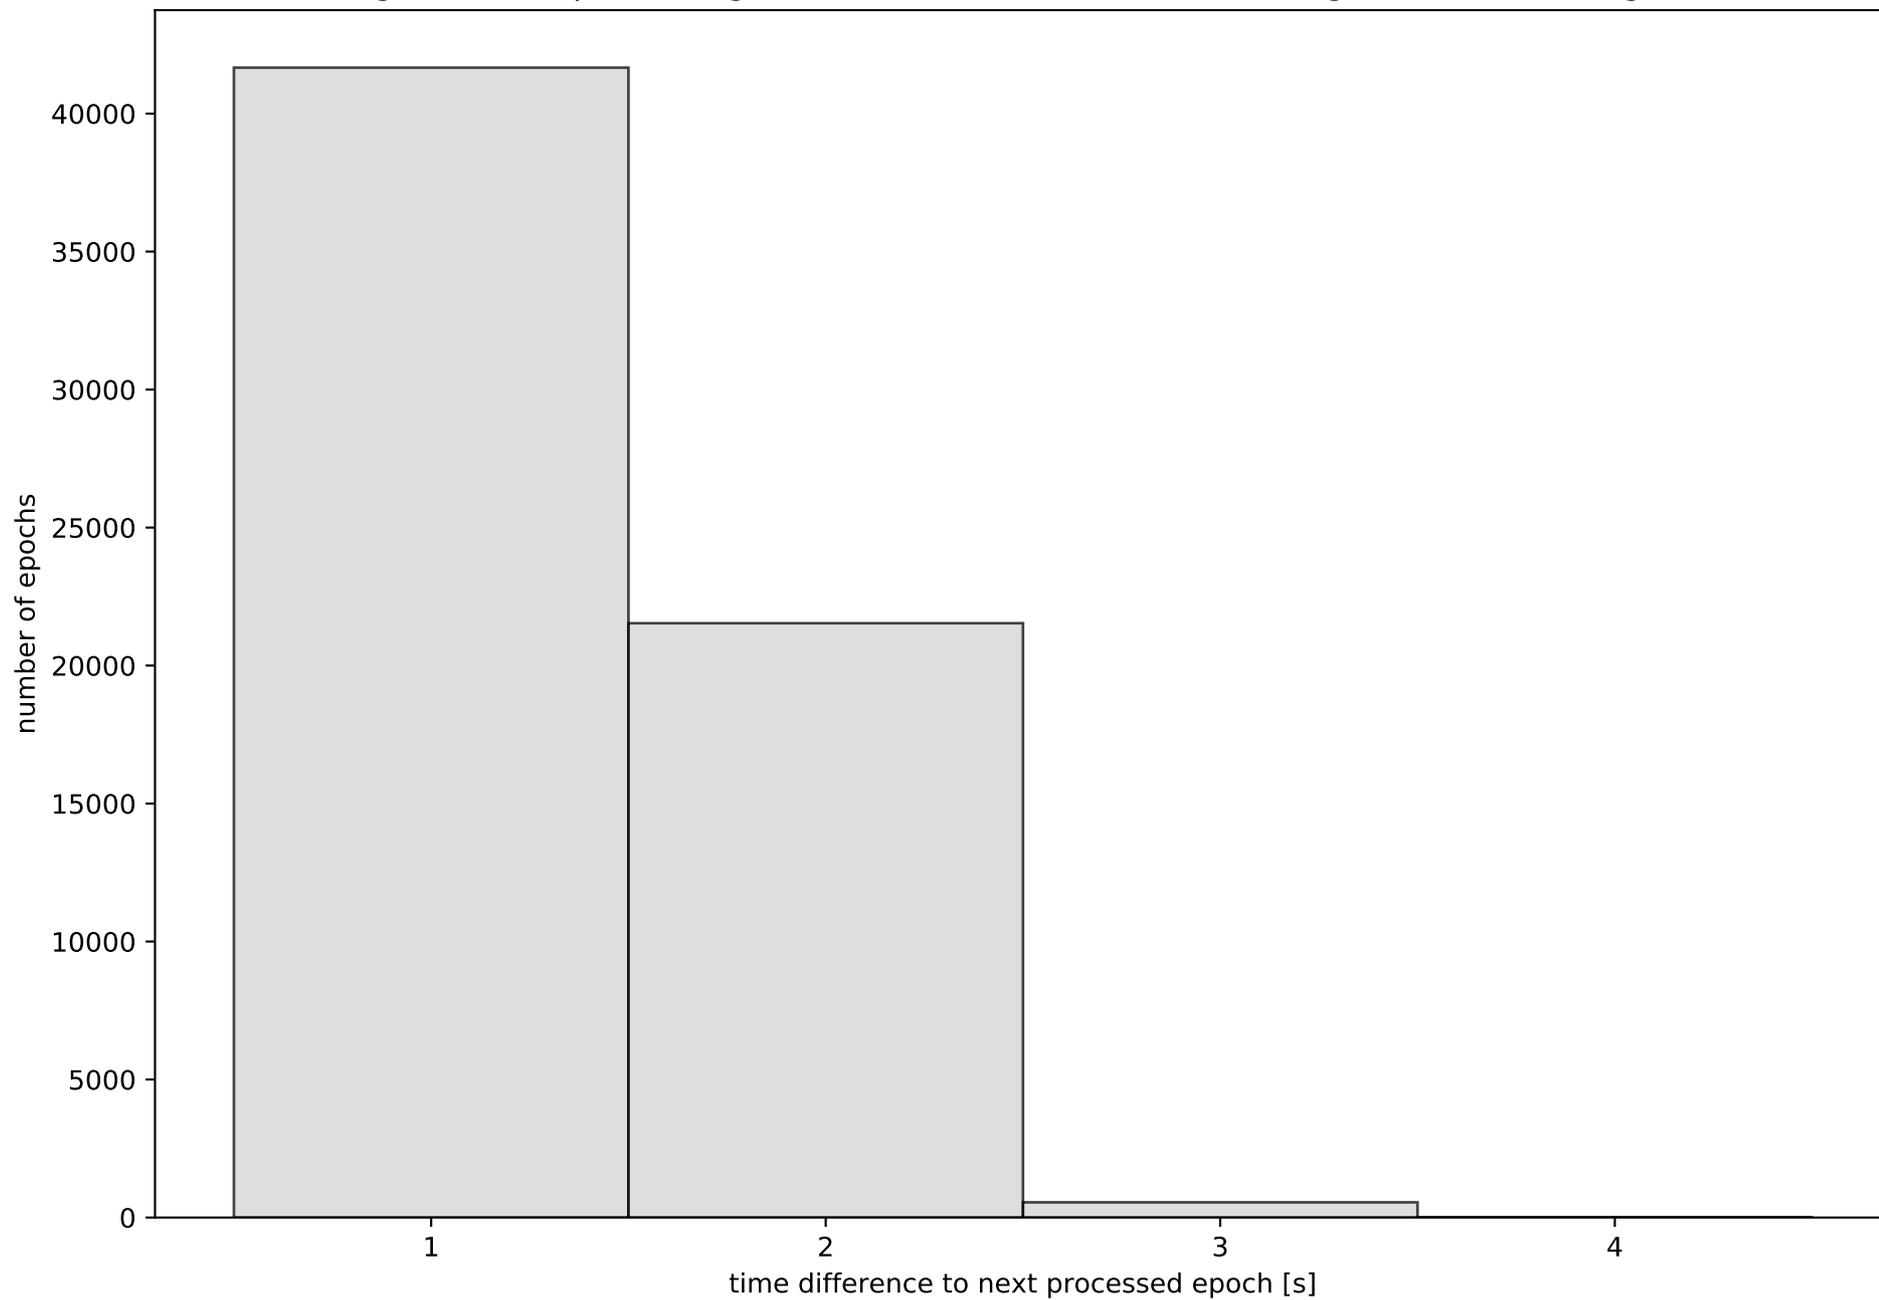


Network N32T with threshold set to 0.3

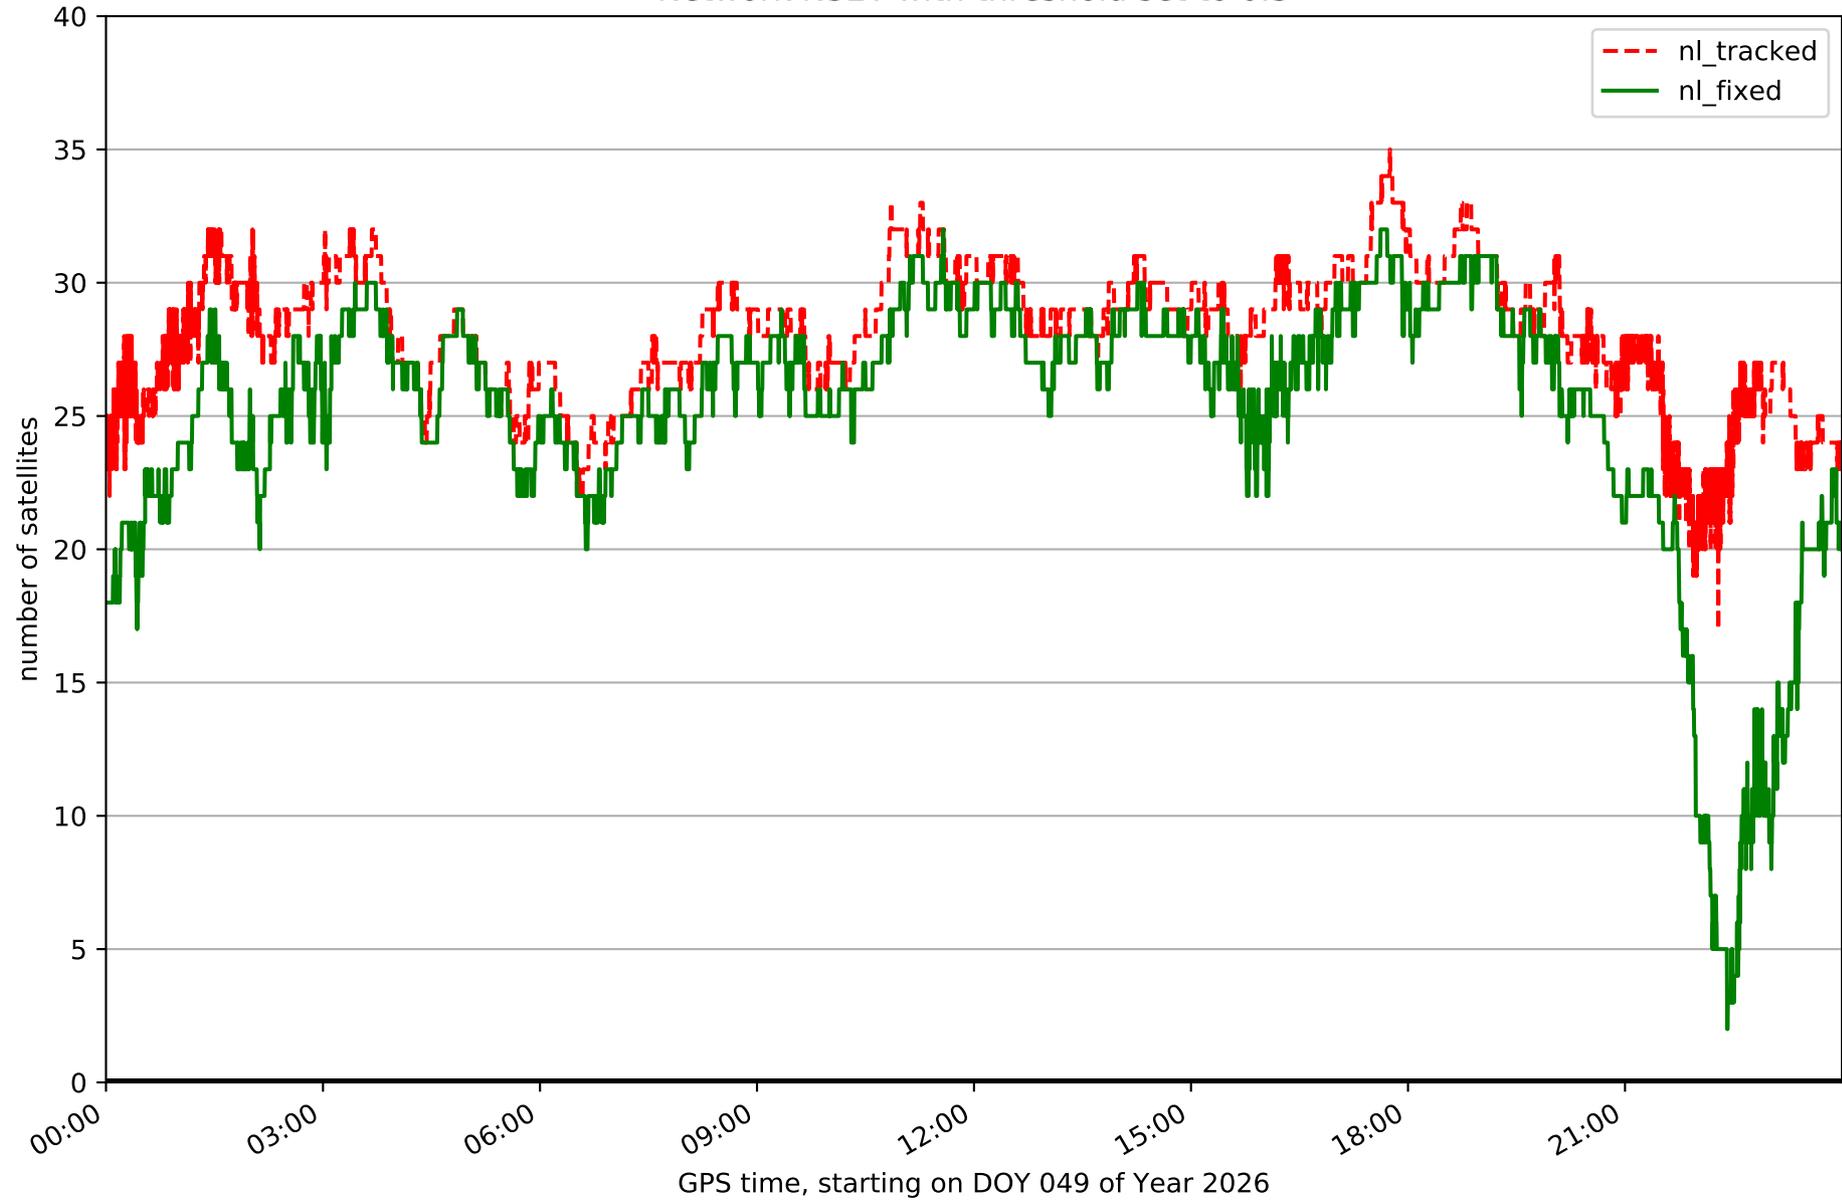


Fixing percentage of satellites in network N32T with threshold set to 0.3

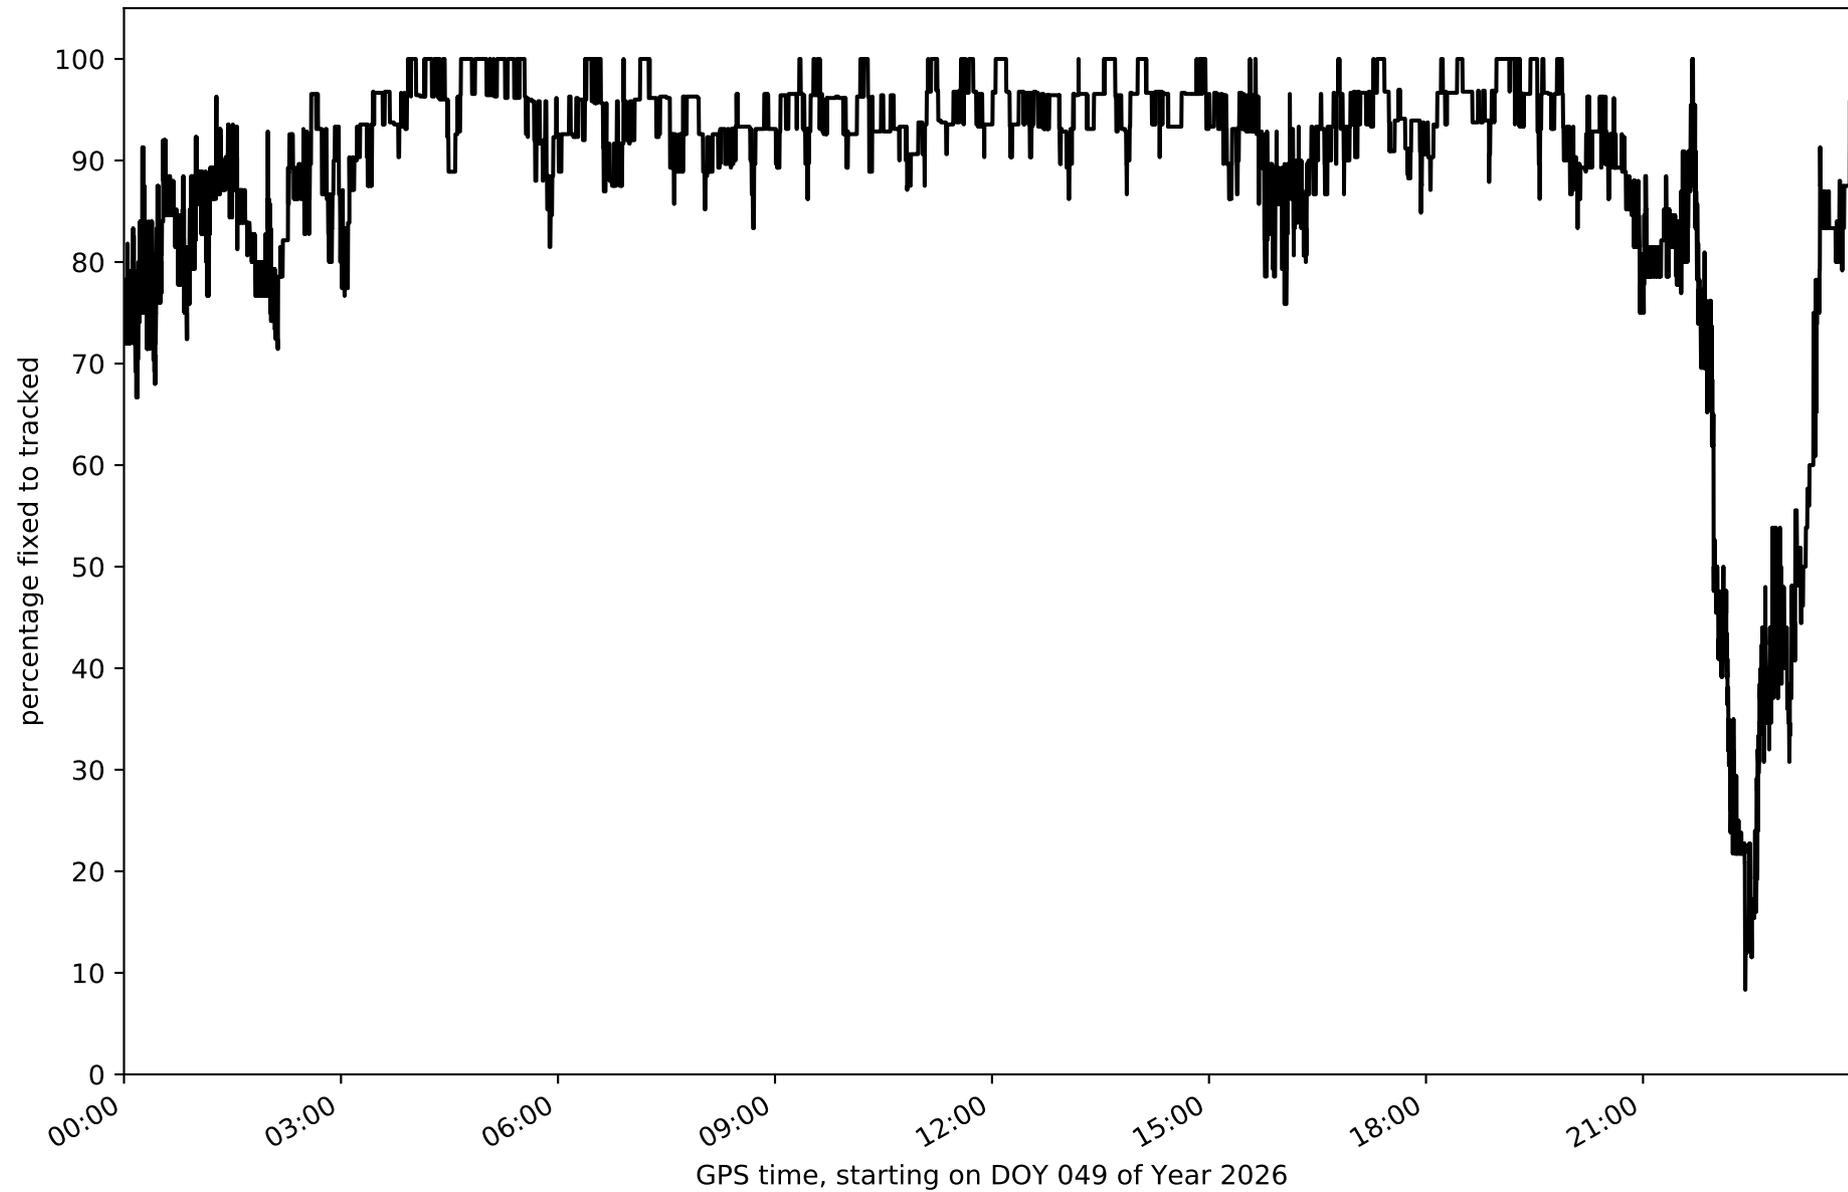


Network N32T - only GPS with threshold set to 0.3

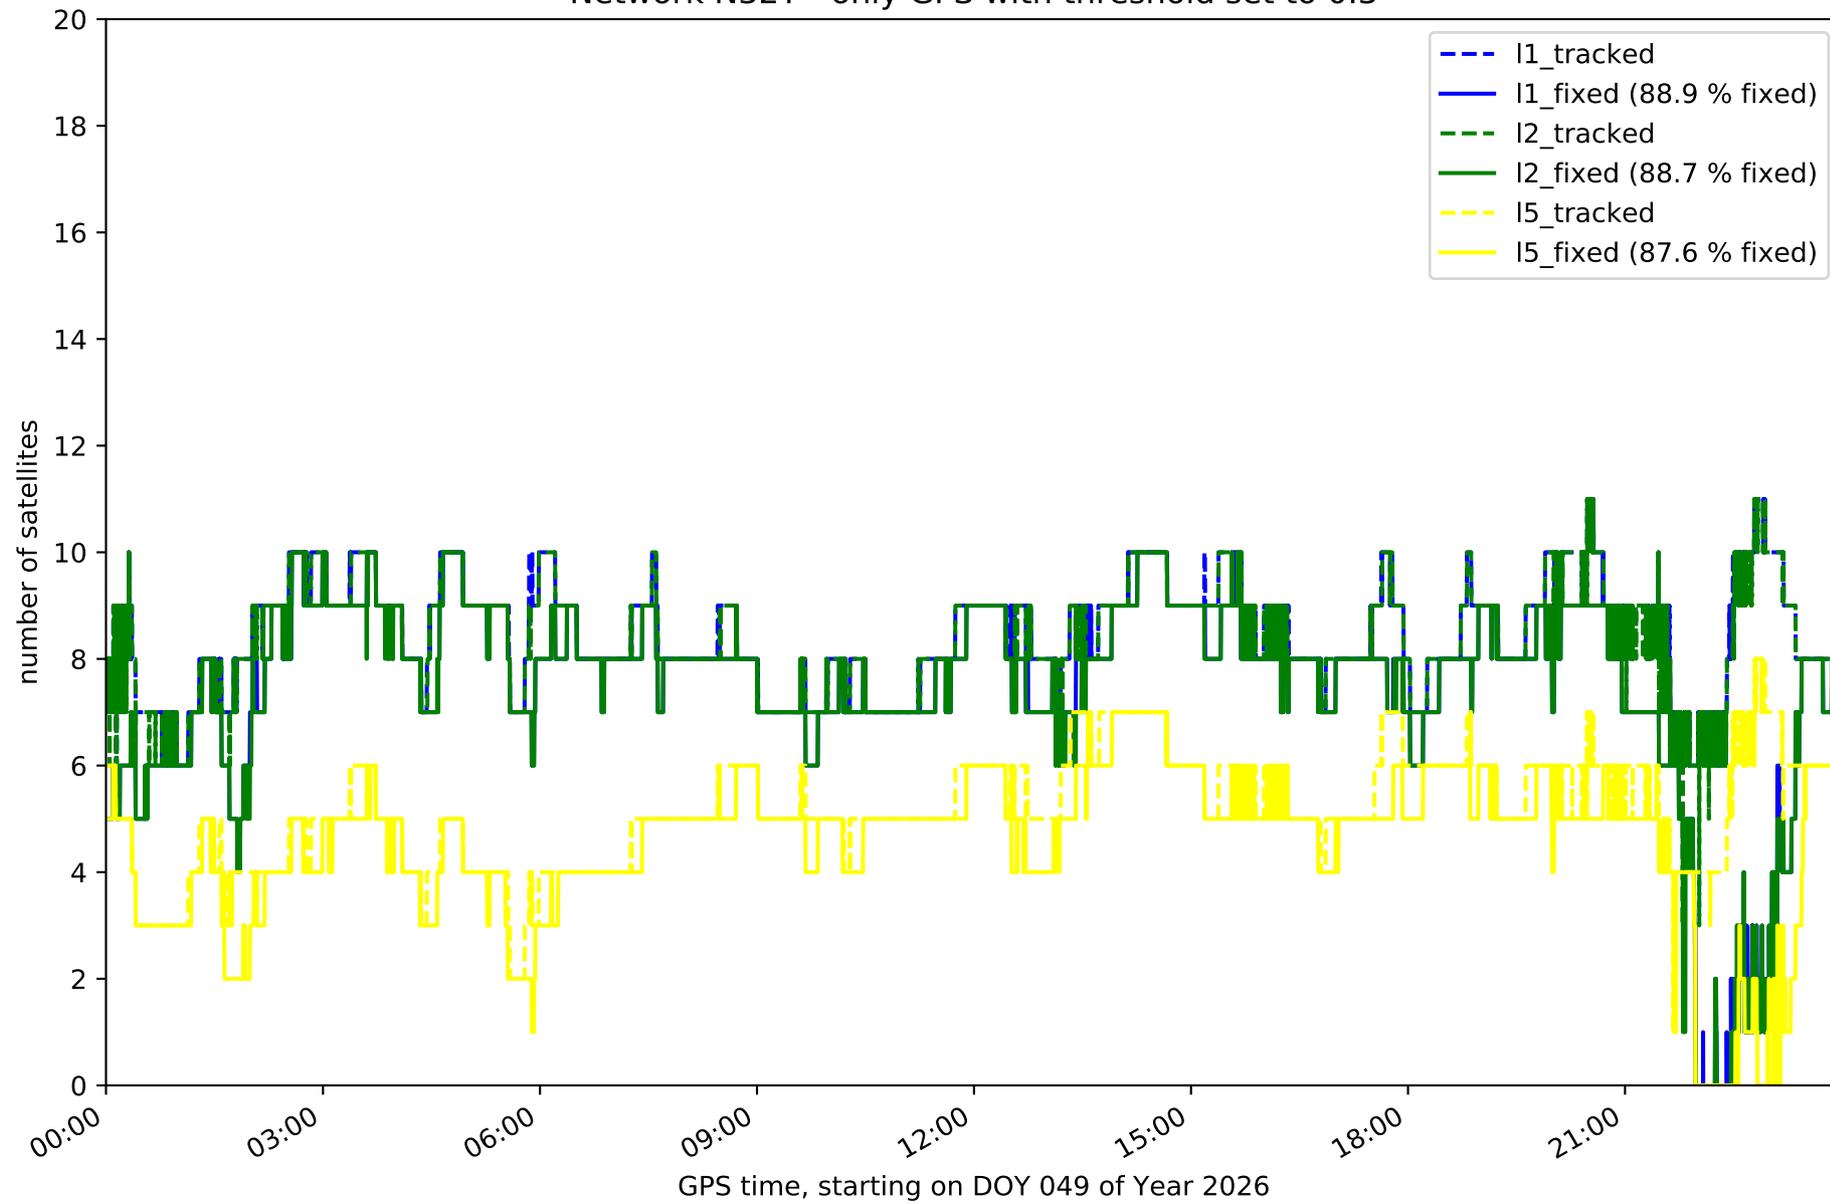


Network N32T - only GLONASS with threshold set to 0.3

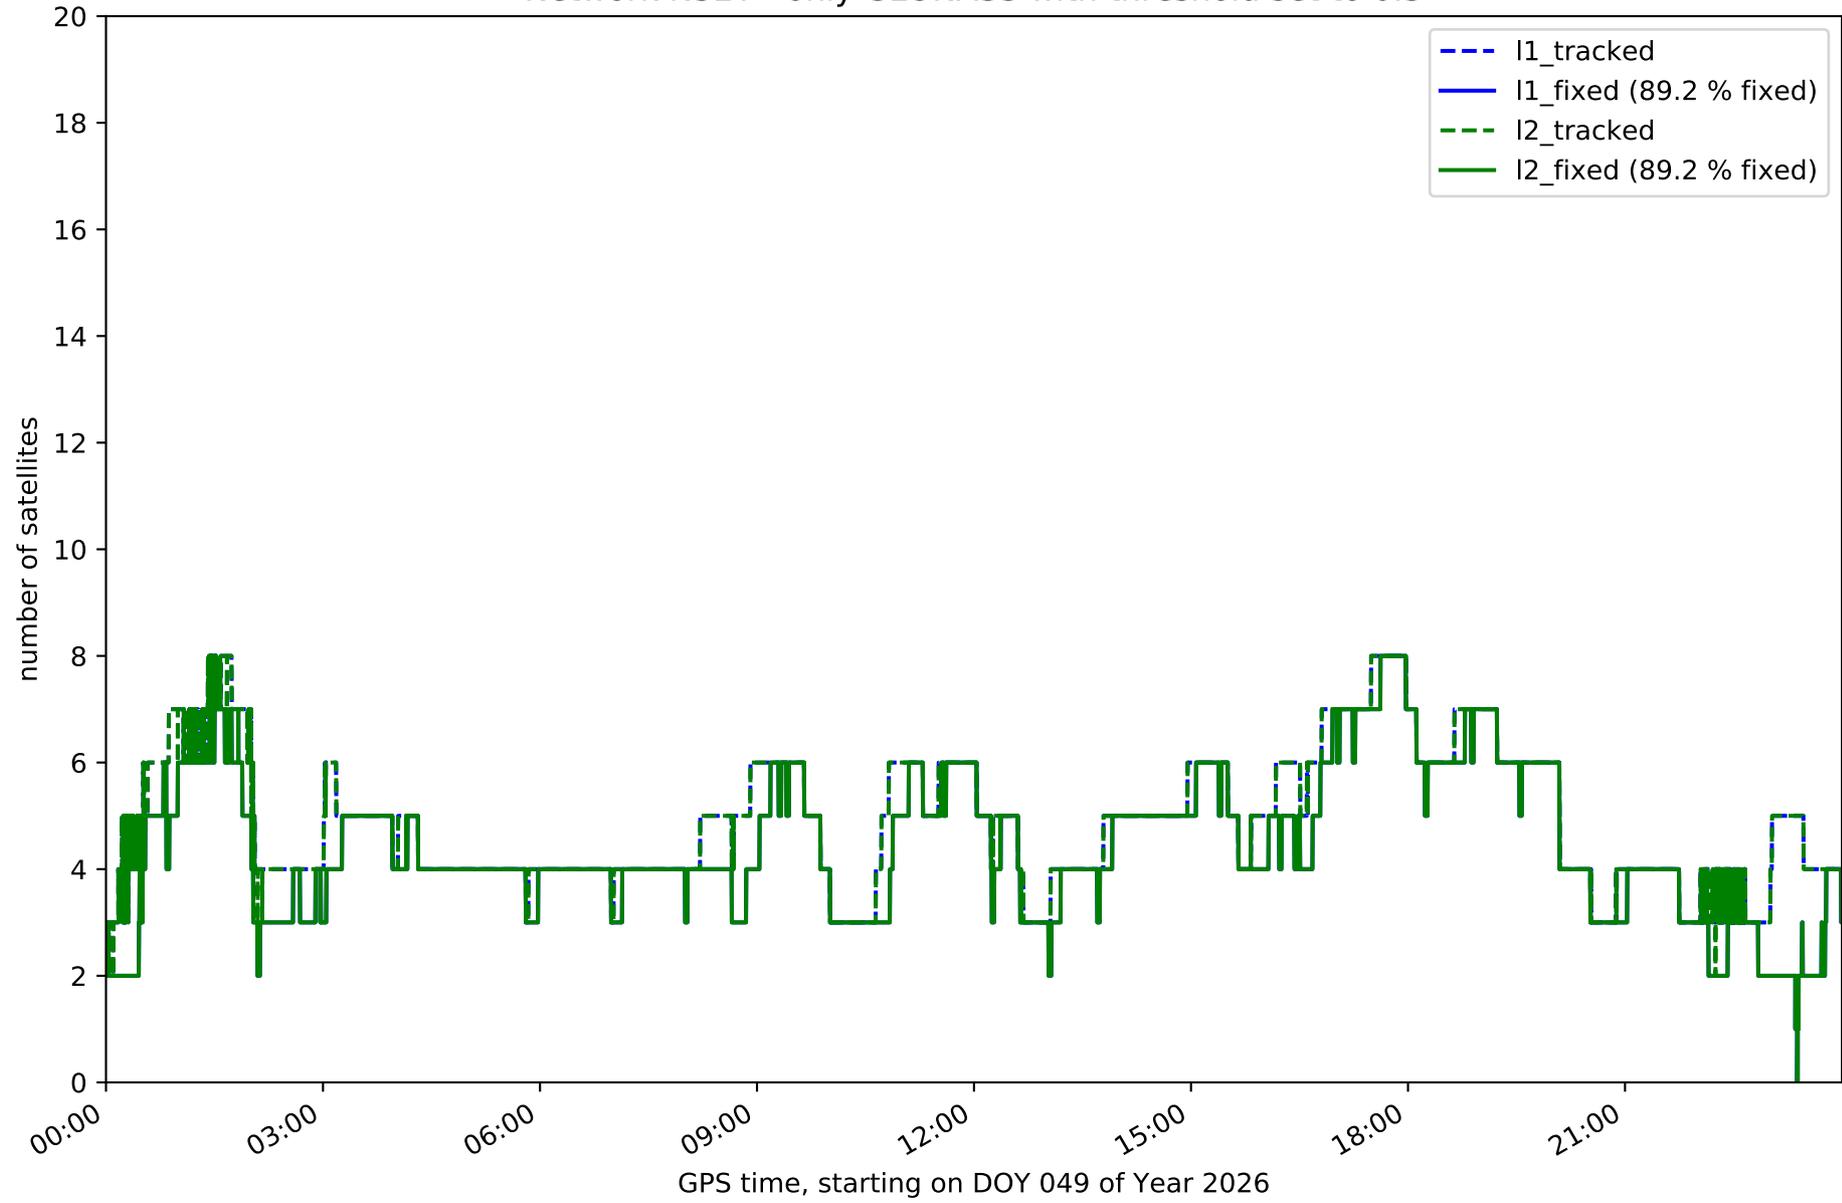


Network N32T - only BDS with threshold set to 0.3

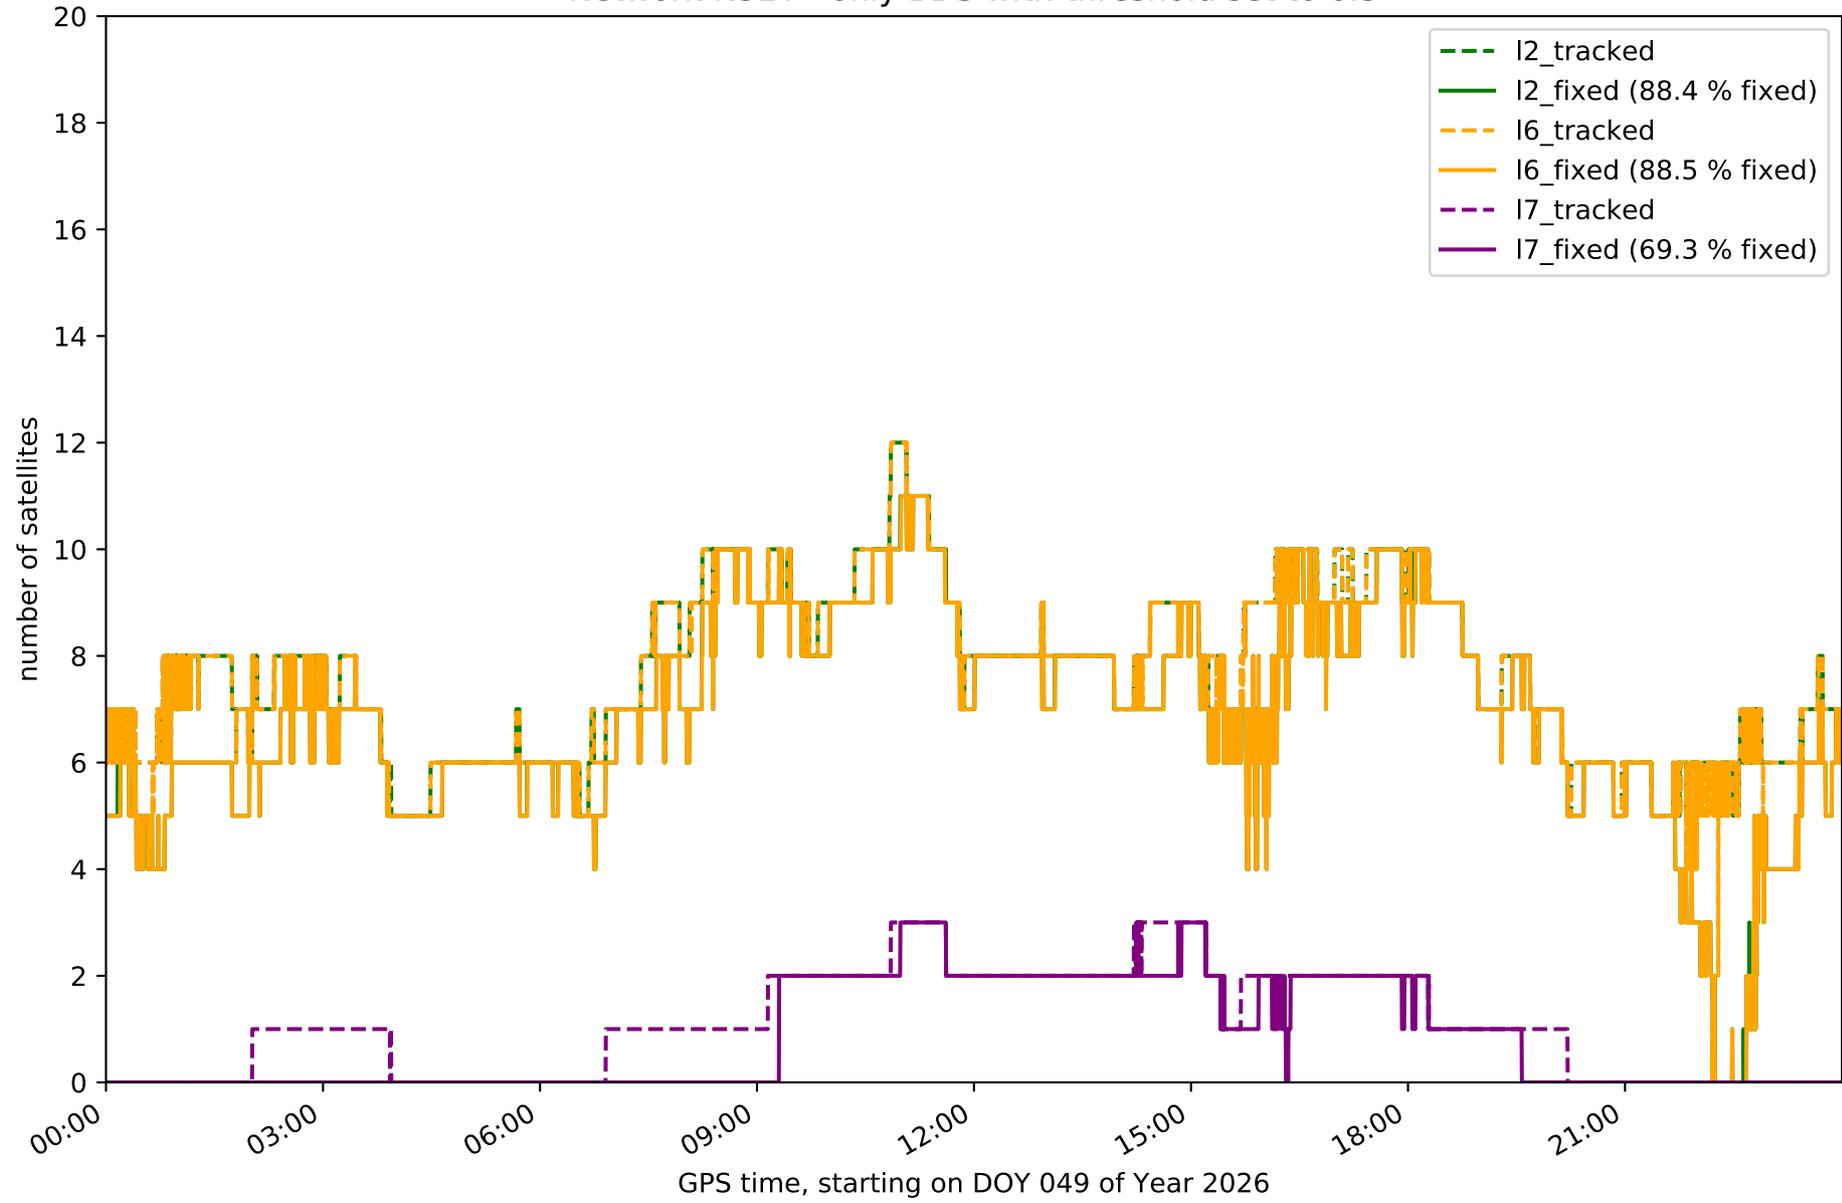


Network N32T - only Galileo with threshold set to 0.3

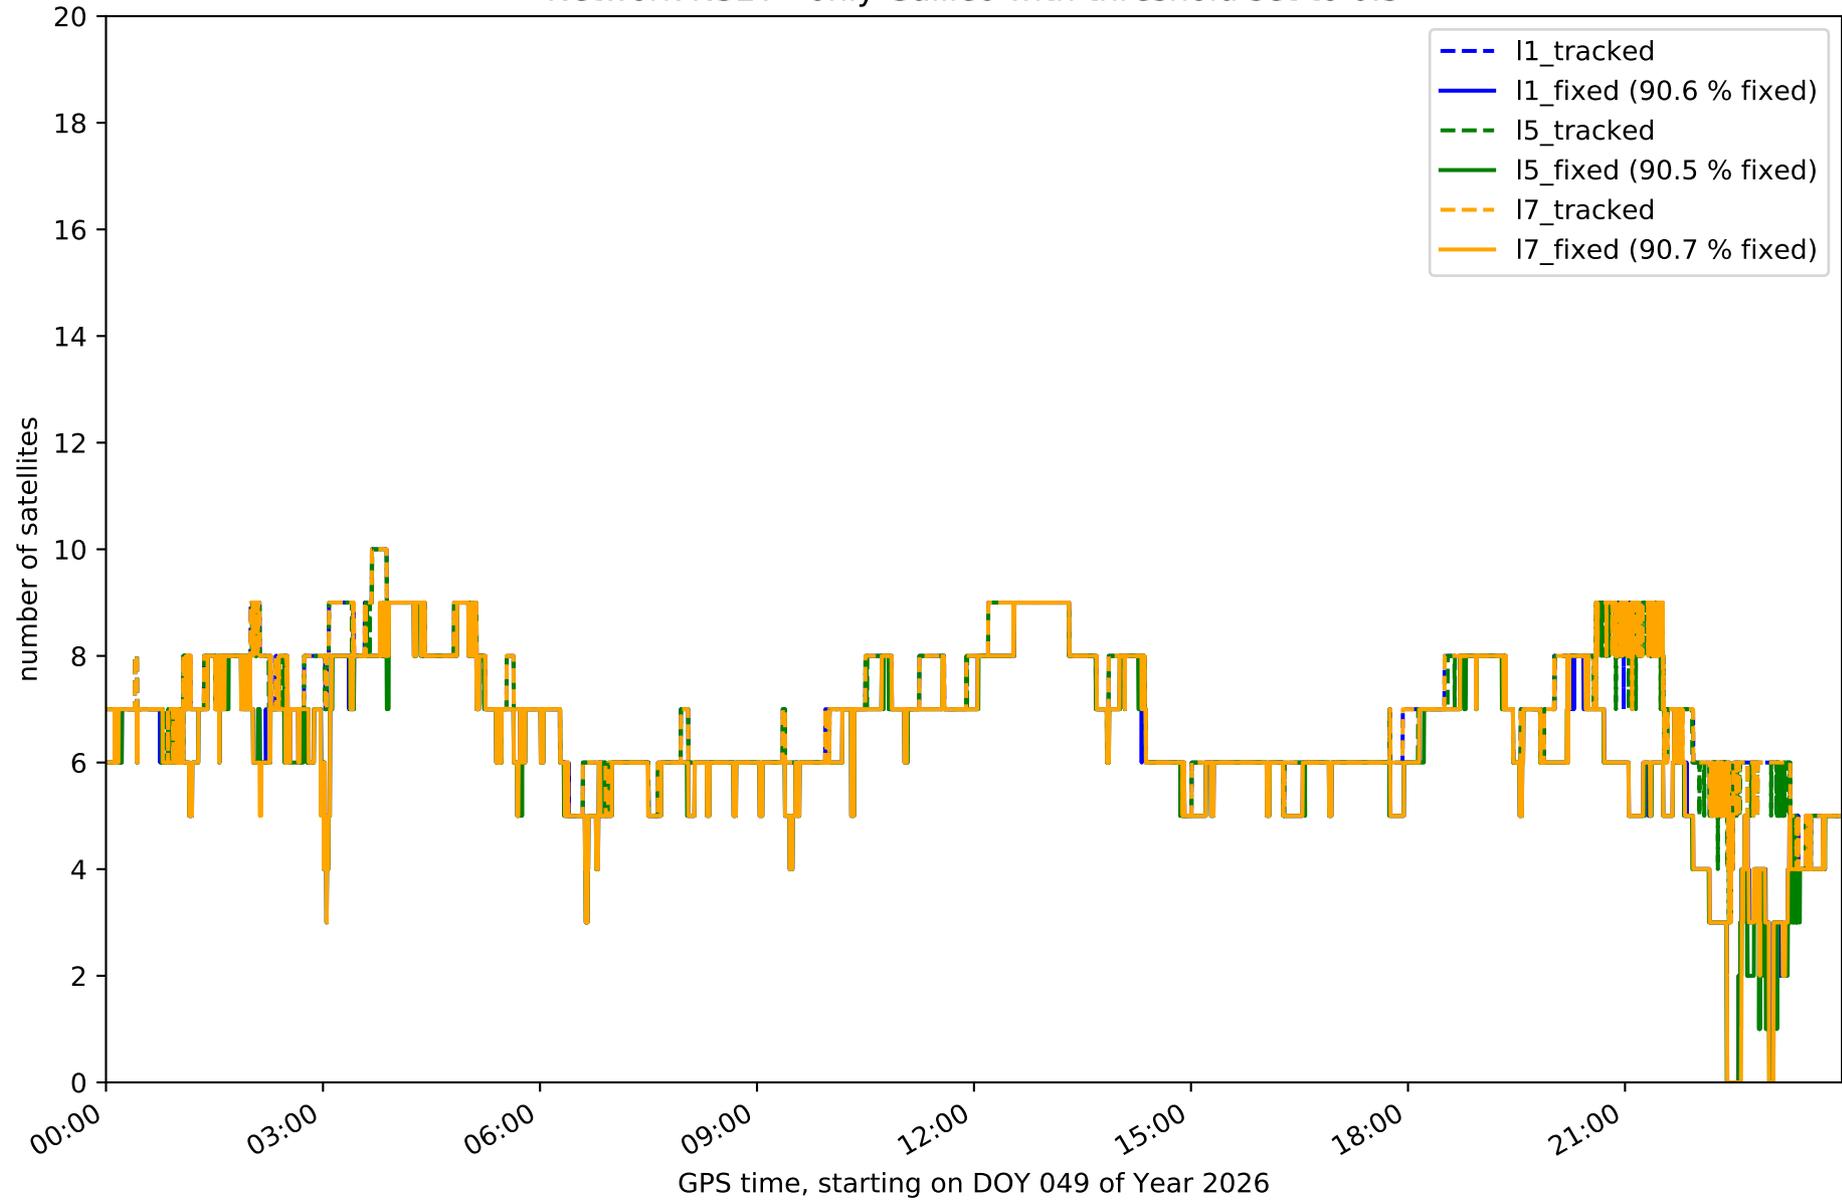


Station EH01 in network N32T

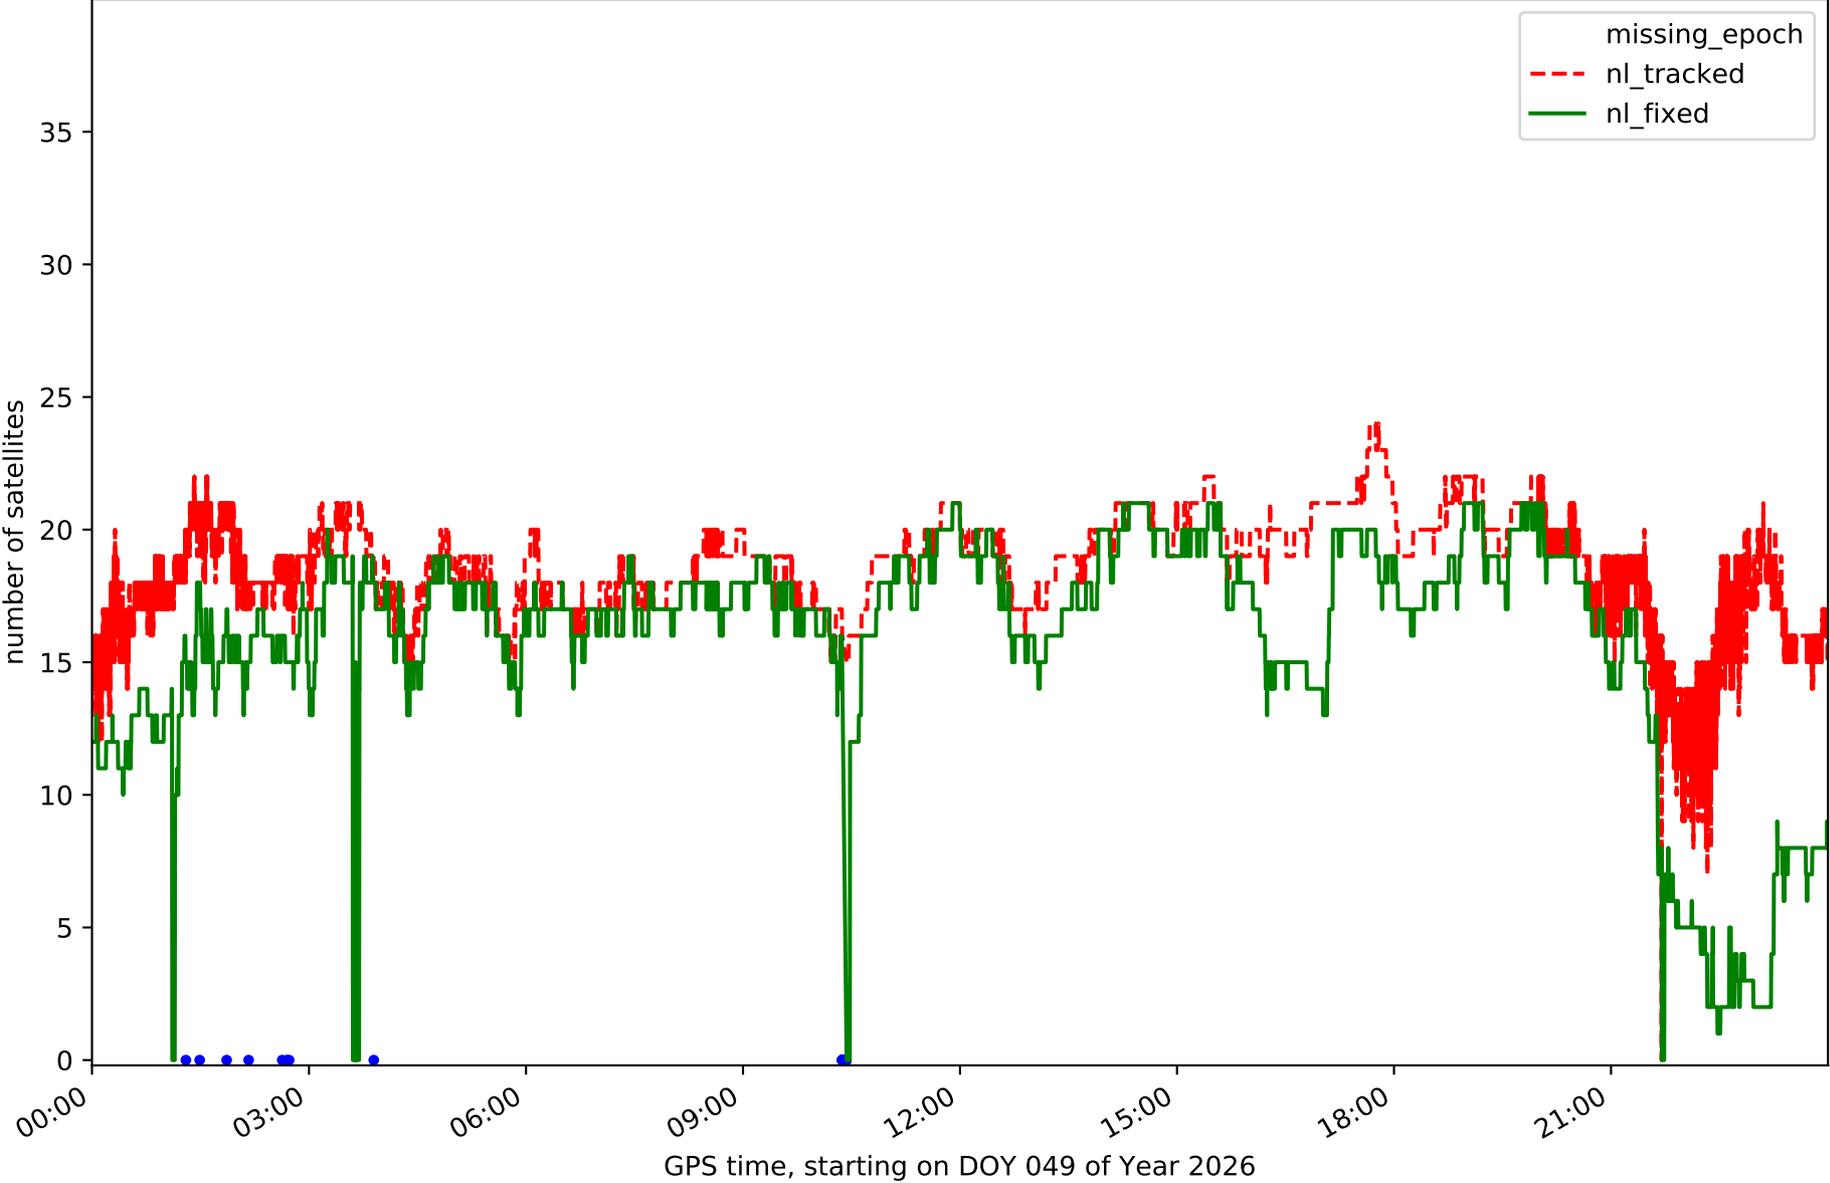


Station EH02 in network N32T

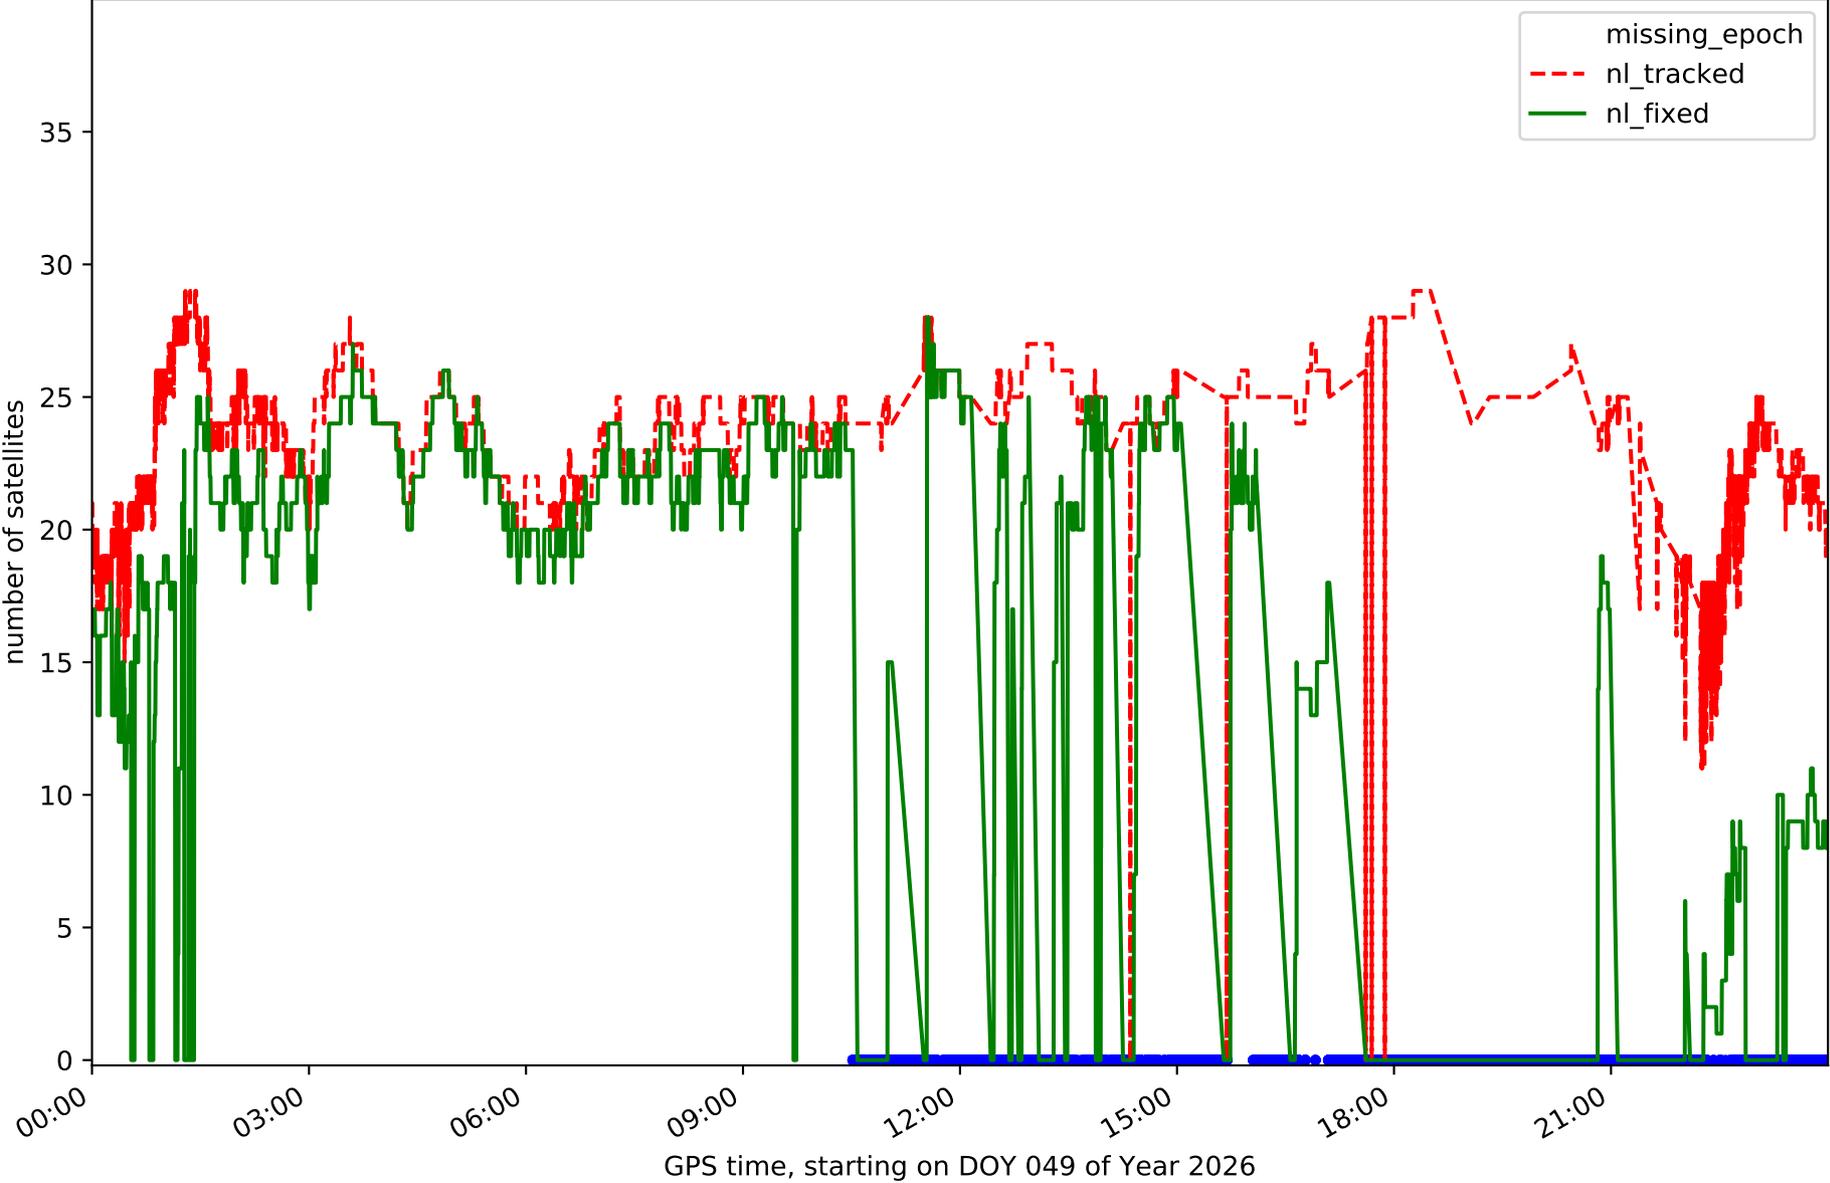


Station GOM1 in network N32T

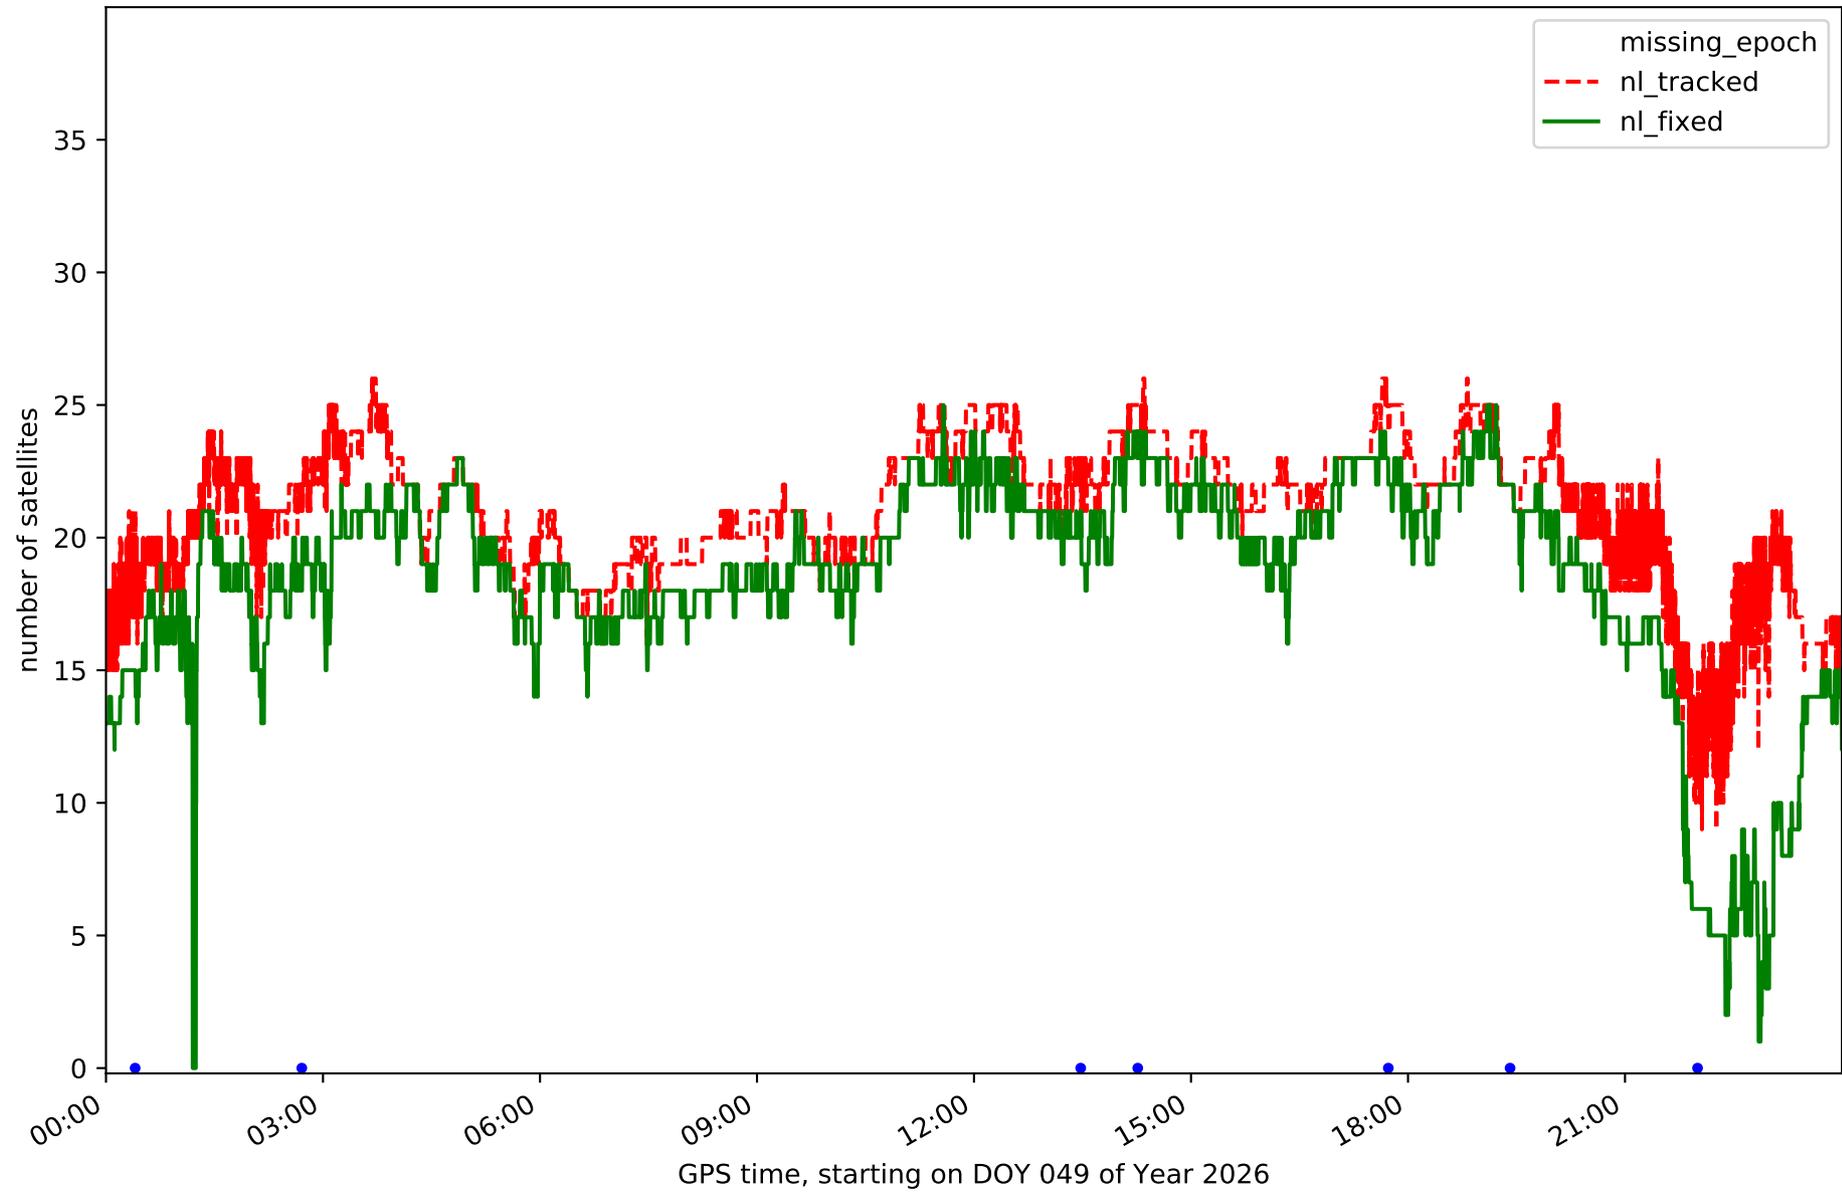


Station GOME in network N32T

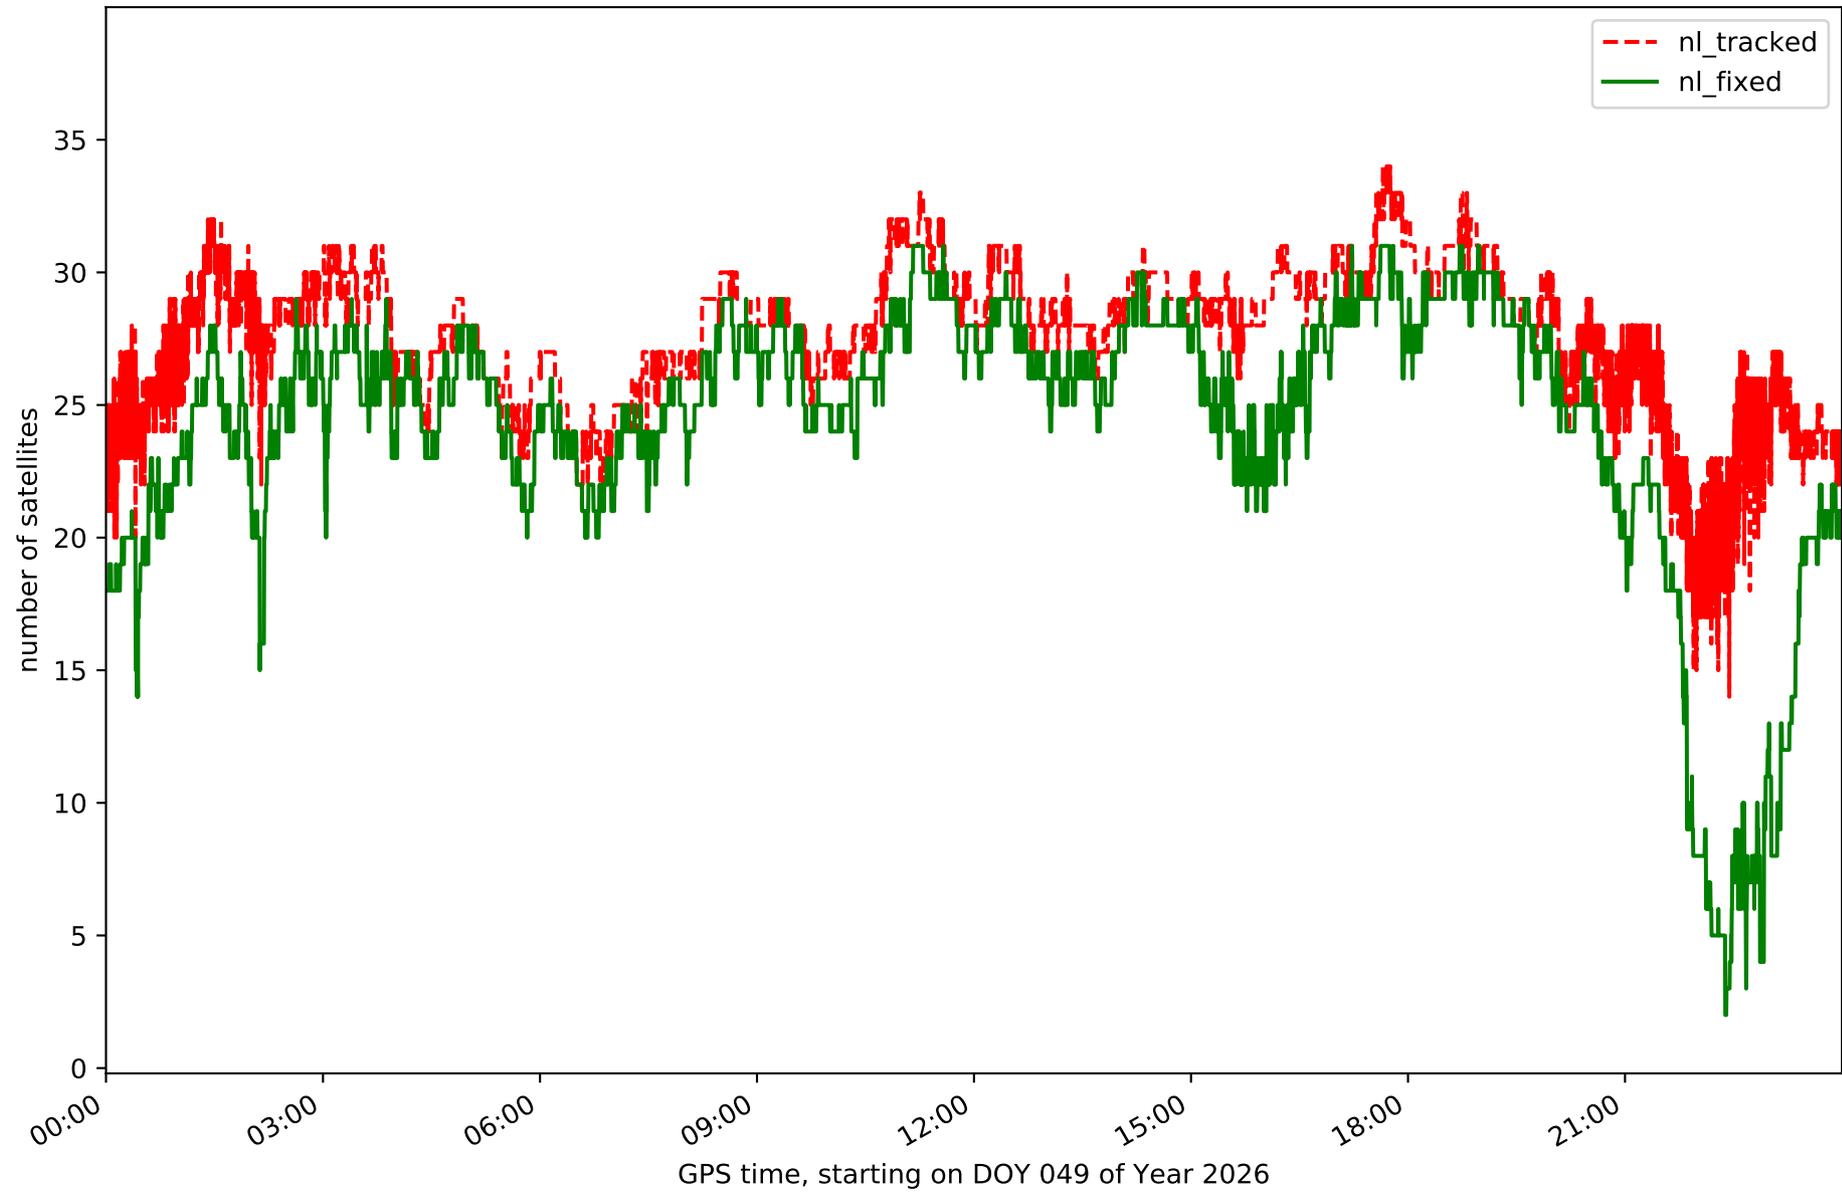


Station IZAN in network N32T

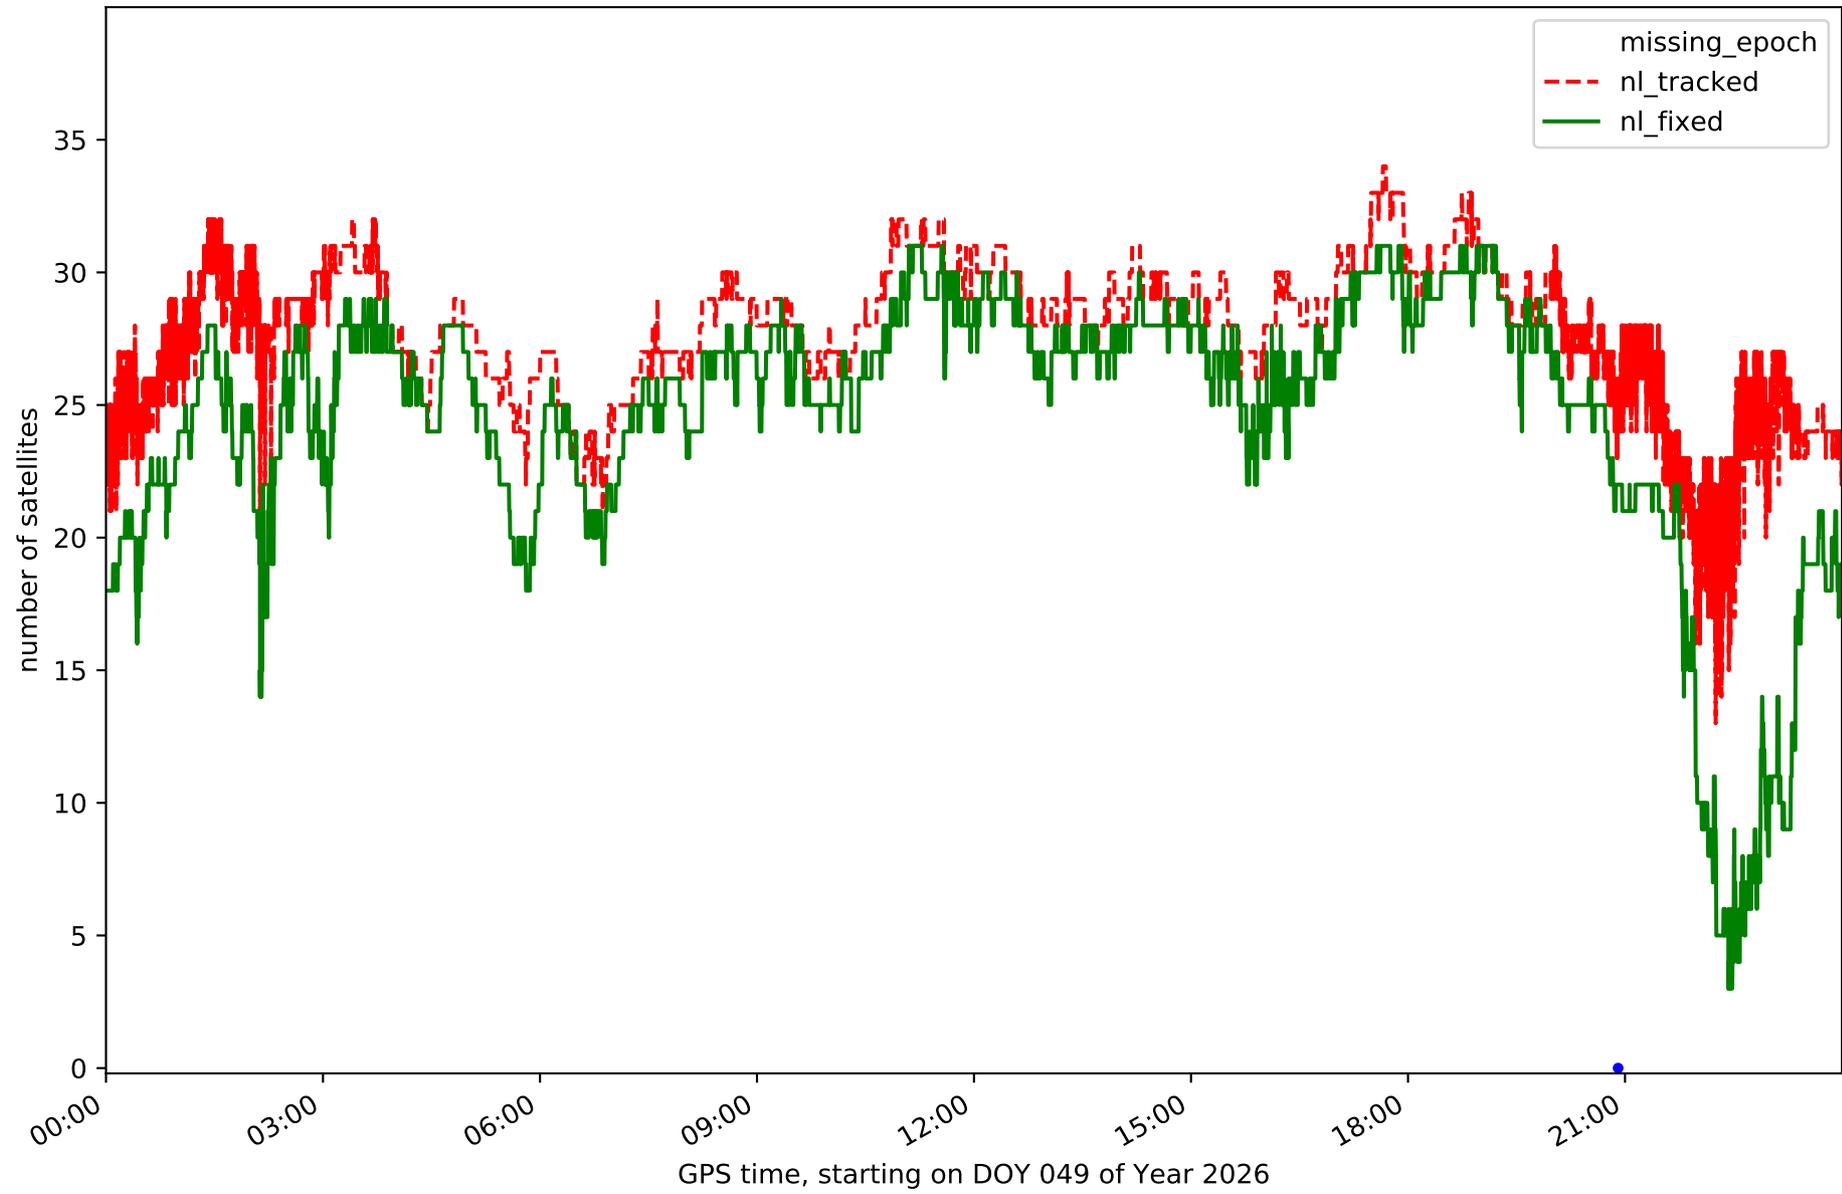


Station LP01 in network N32T

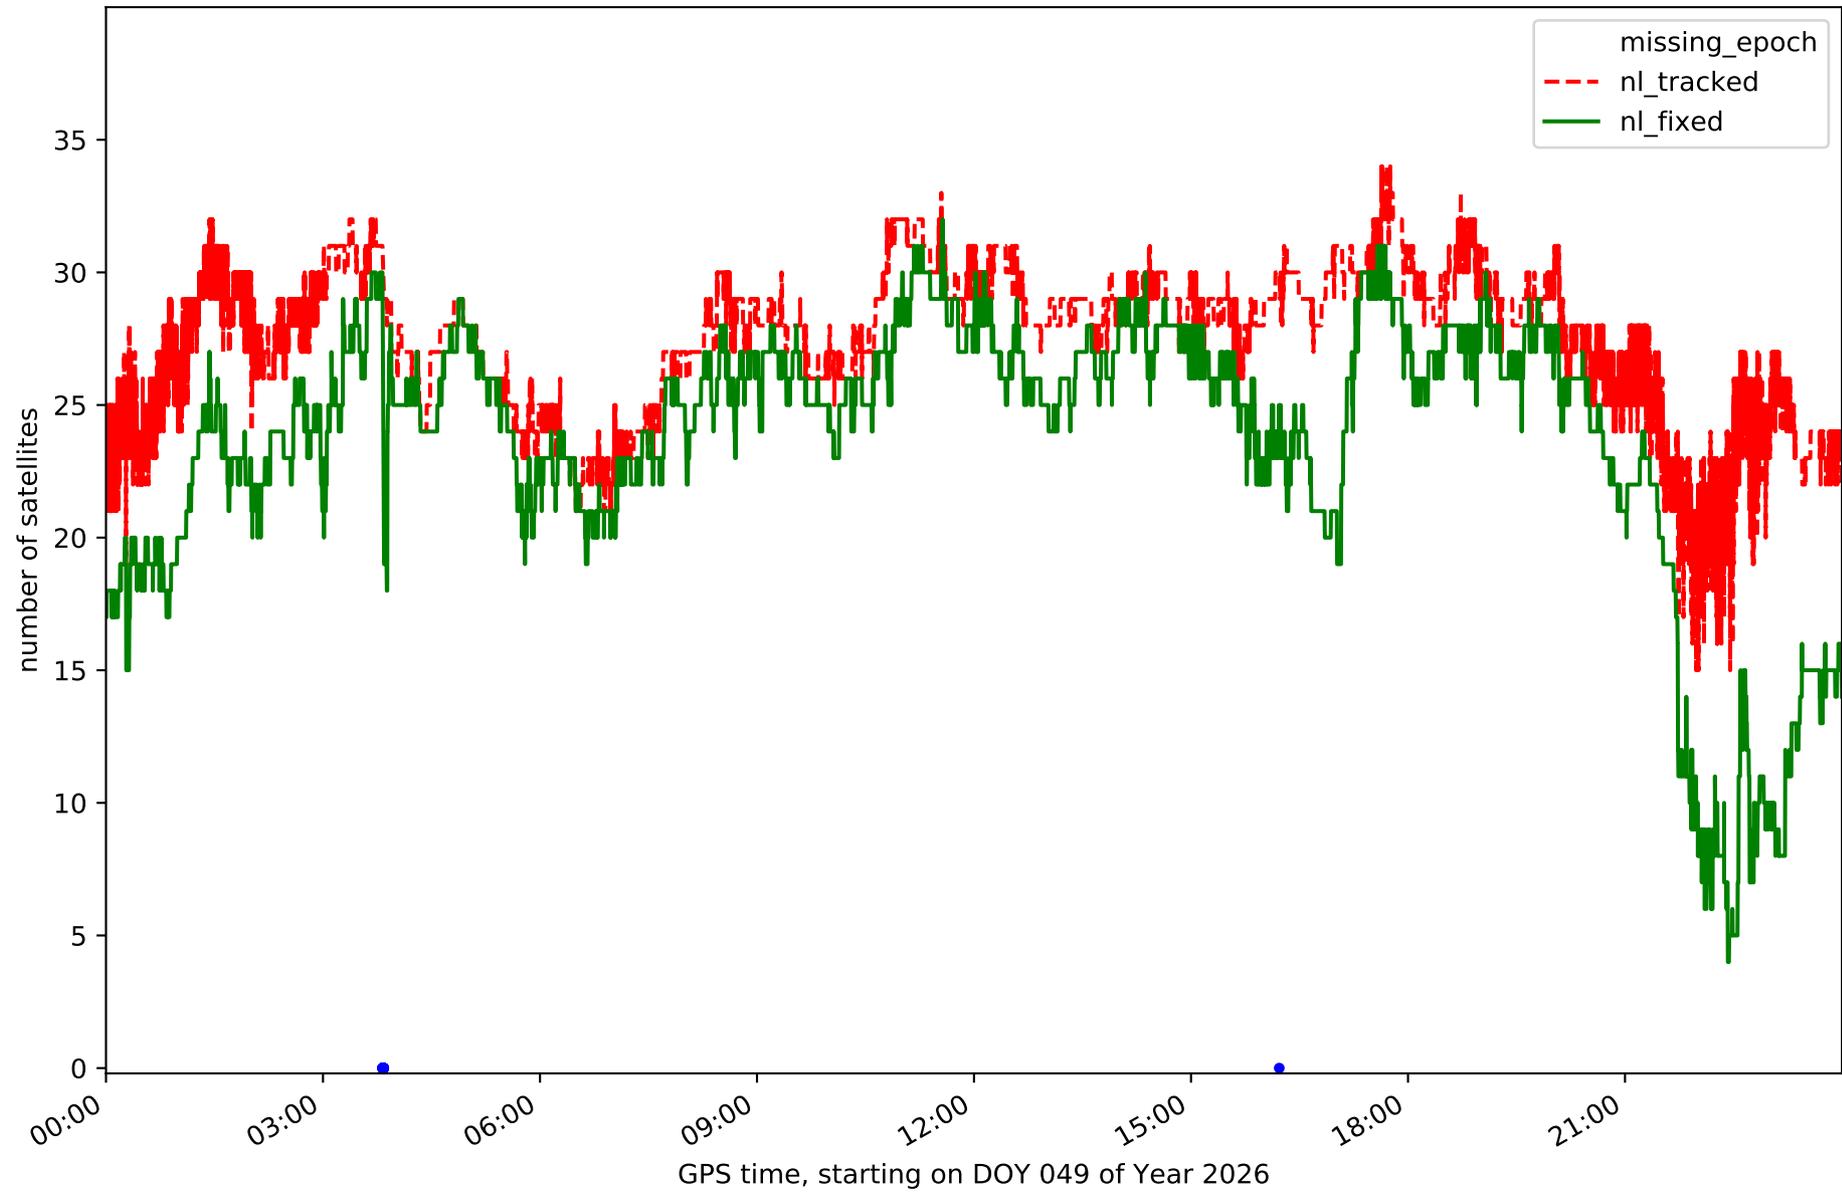


Station LP03 in network N32T

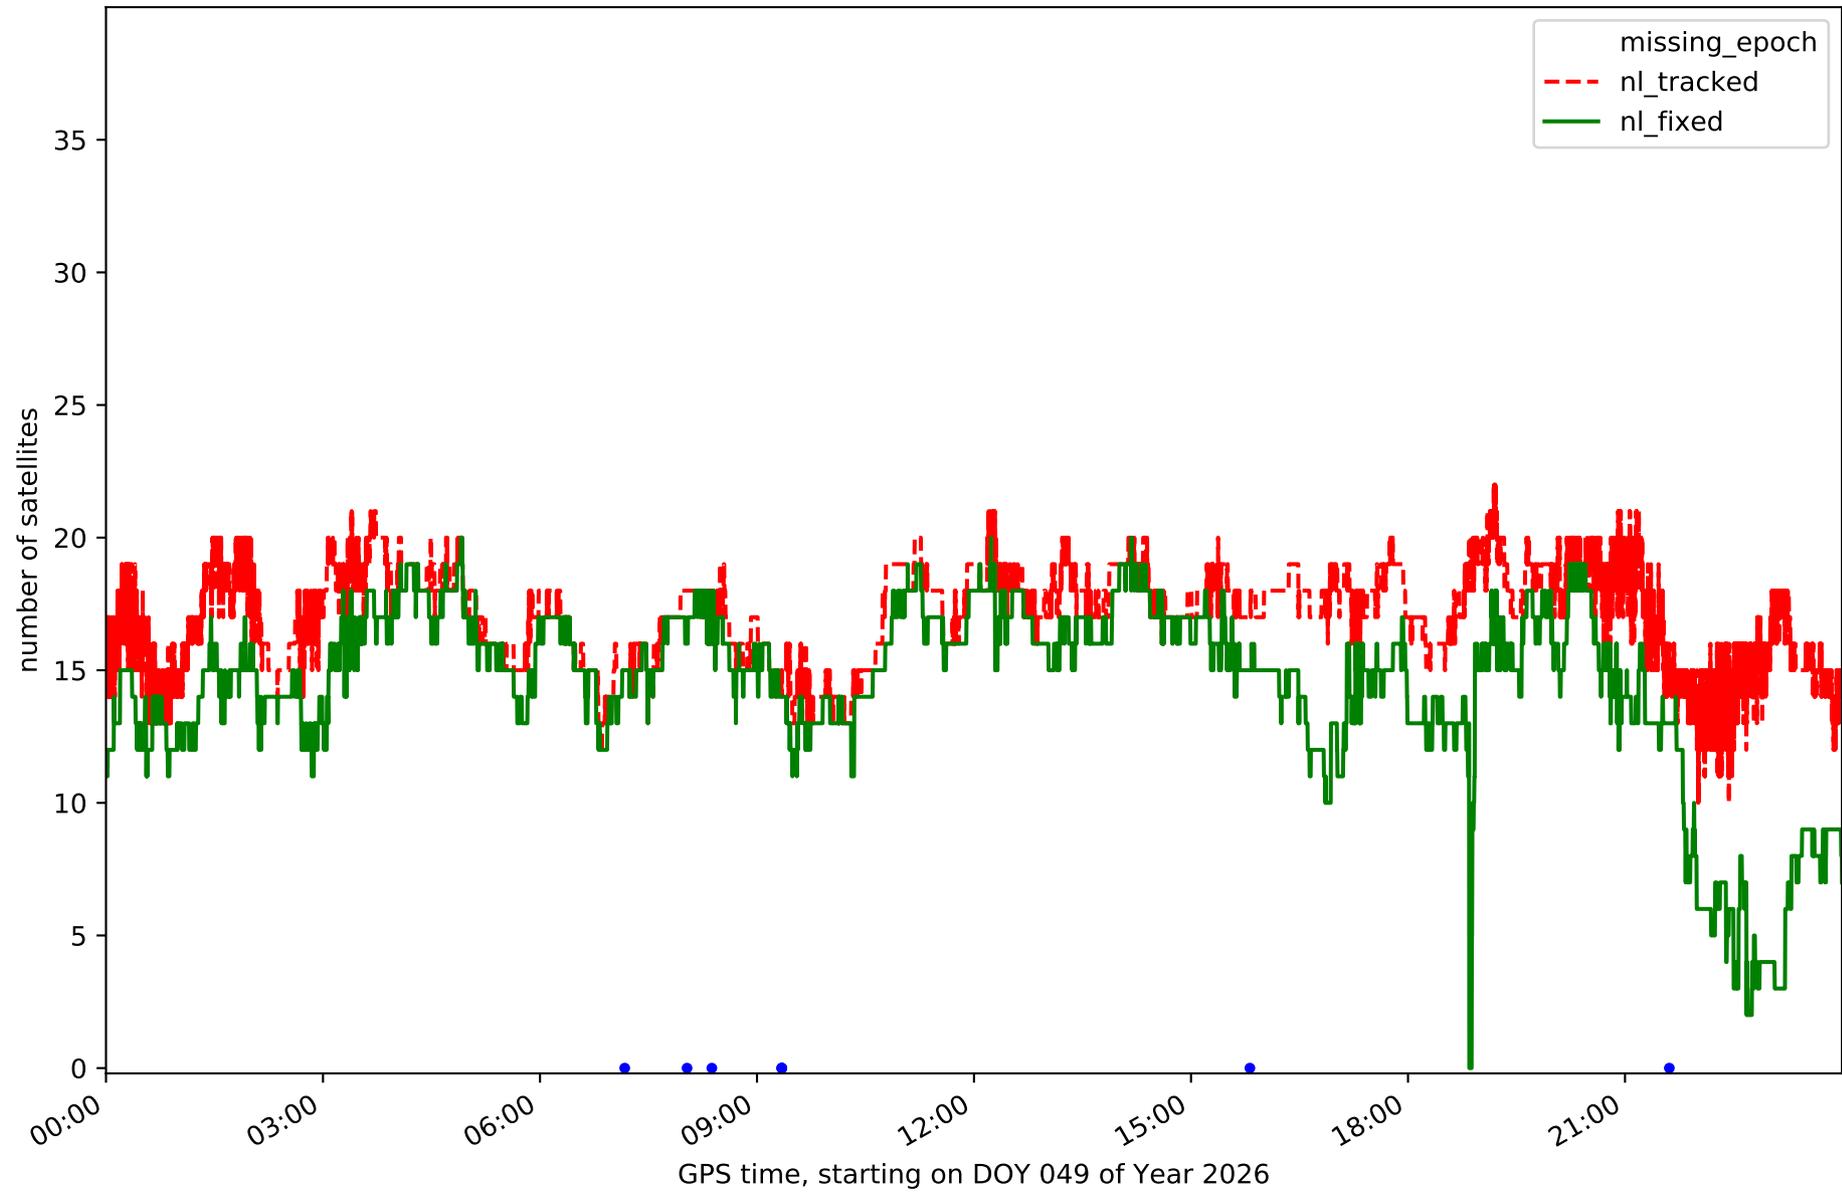


Station LPAL in network N32T

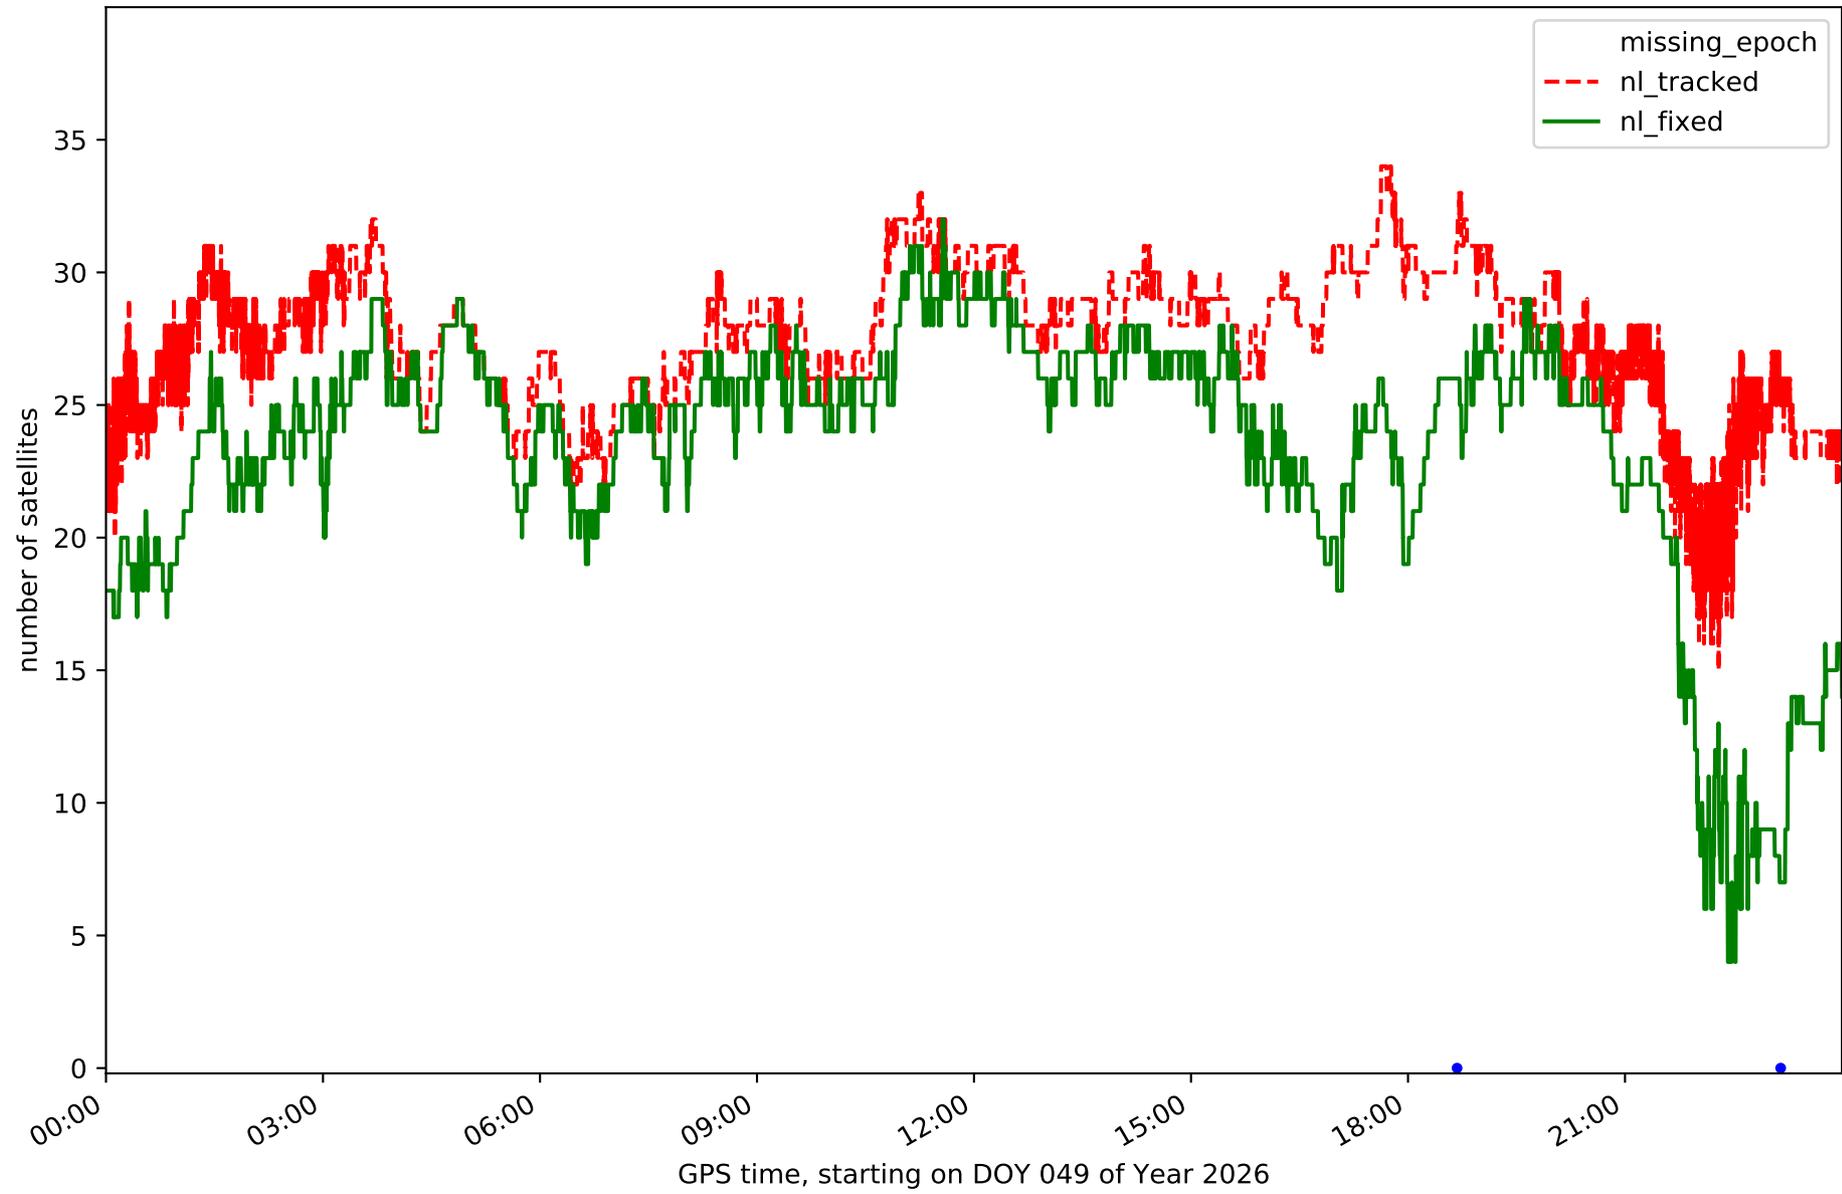


Station LRES in network N32T

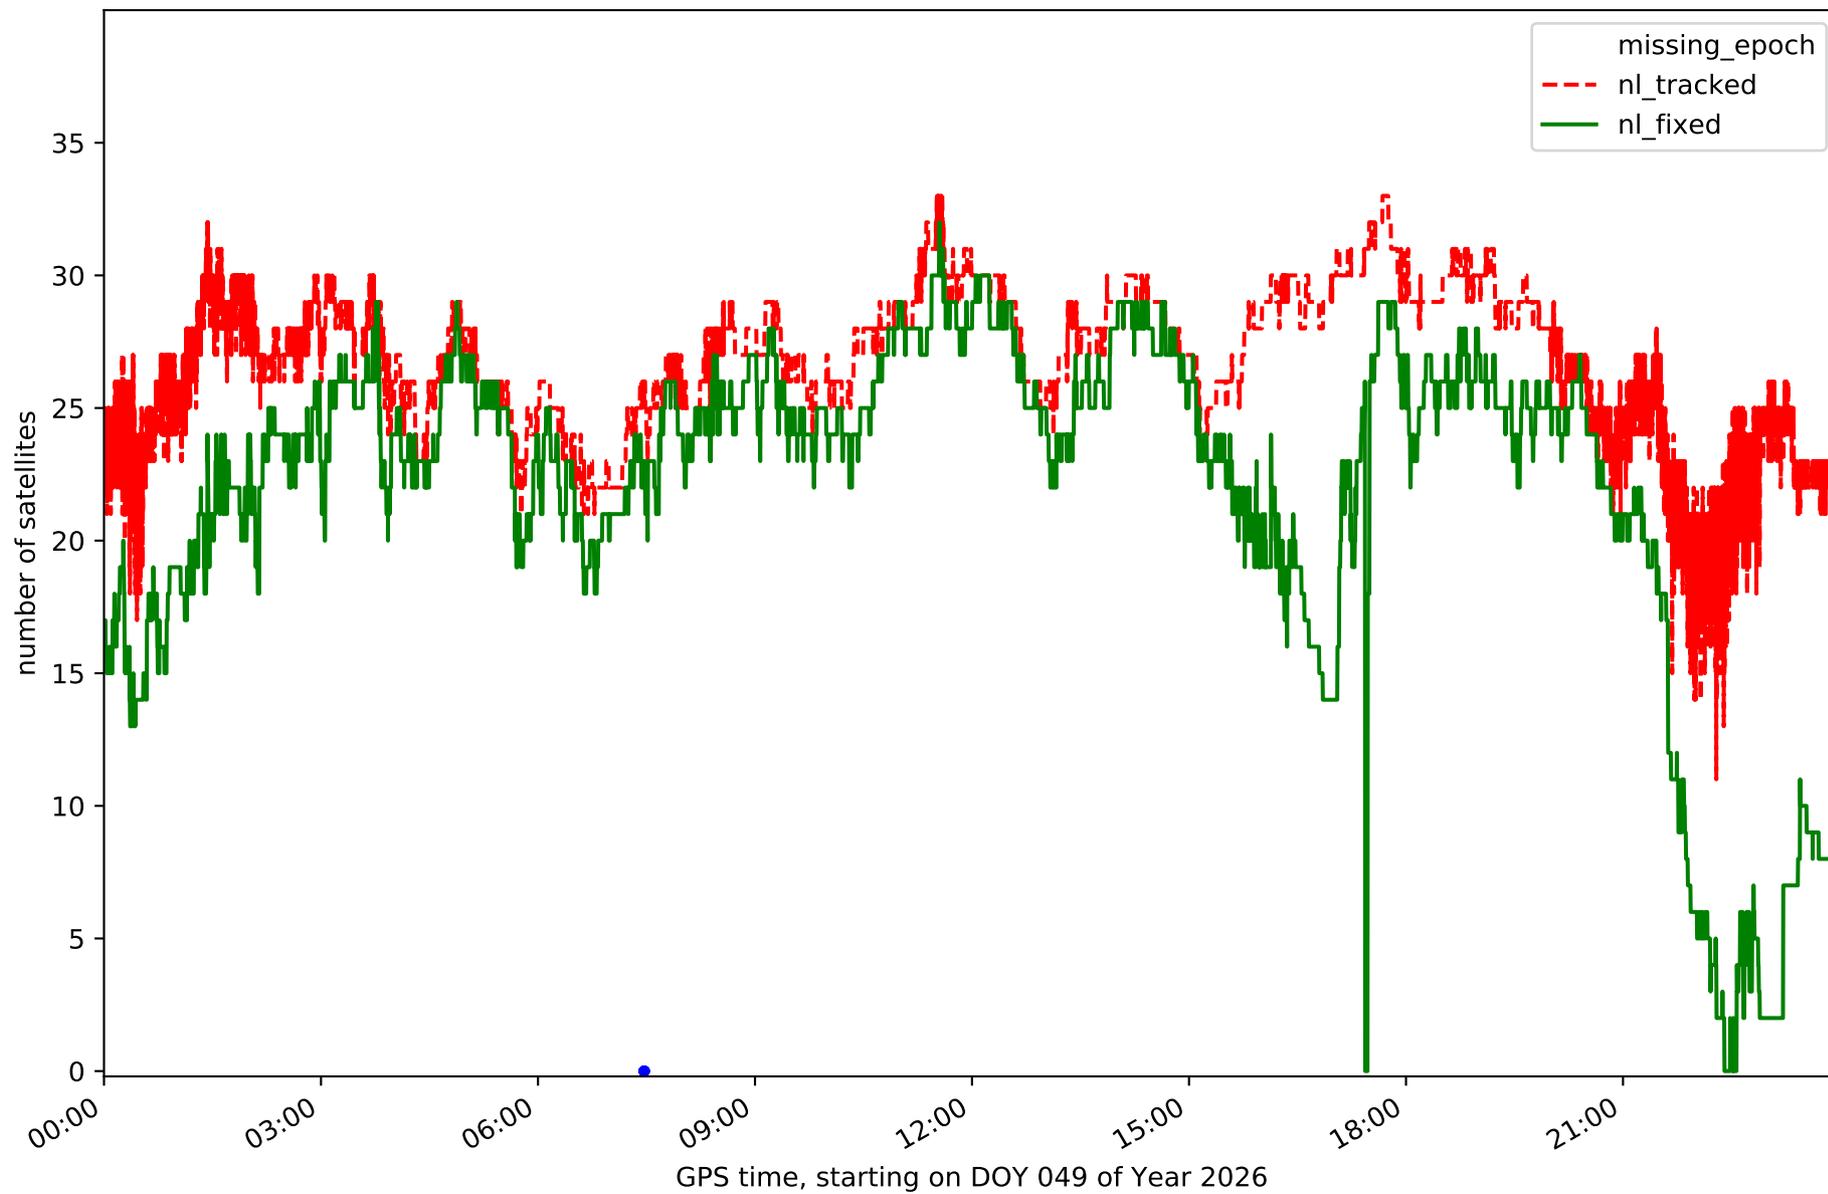


Station TN01 in network N32T

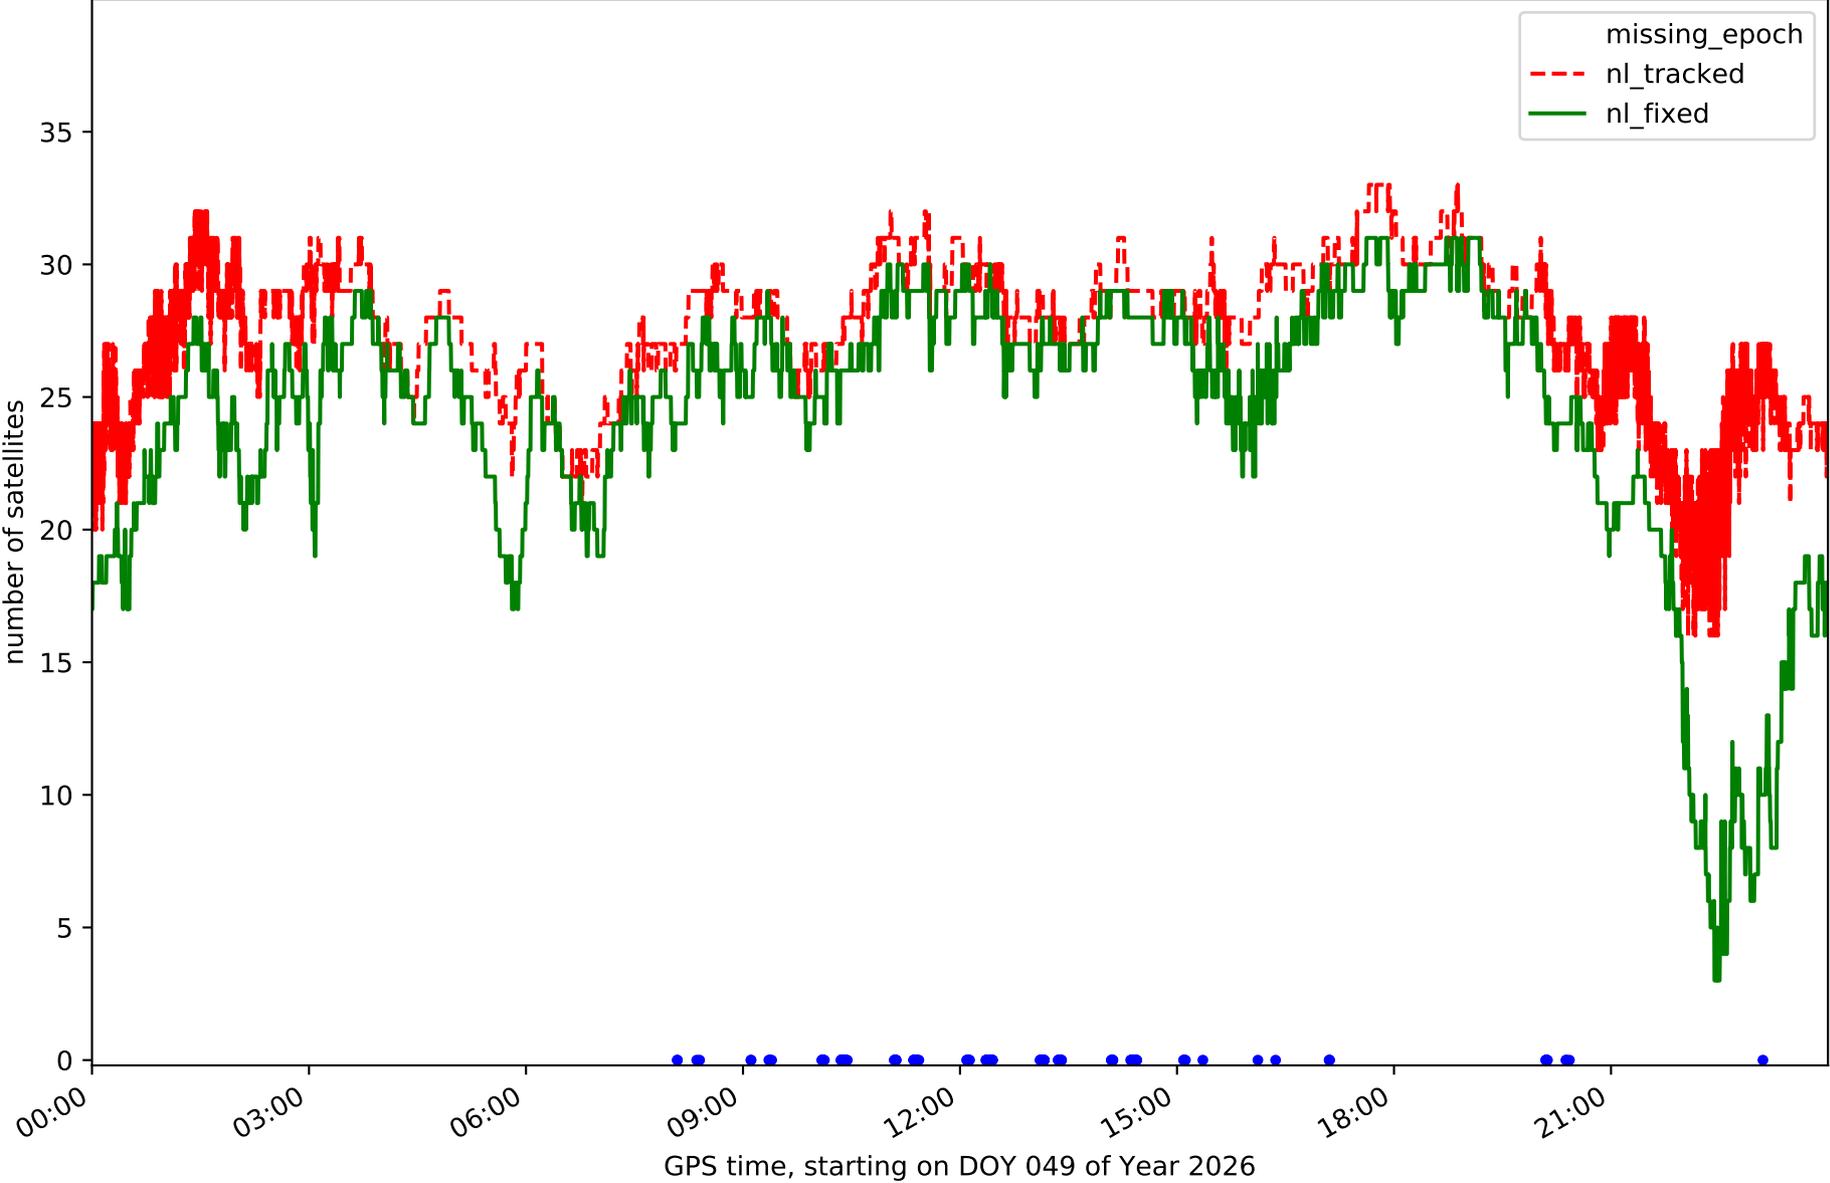


Station TN02 in network N32T

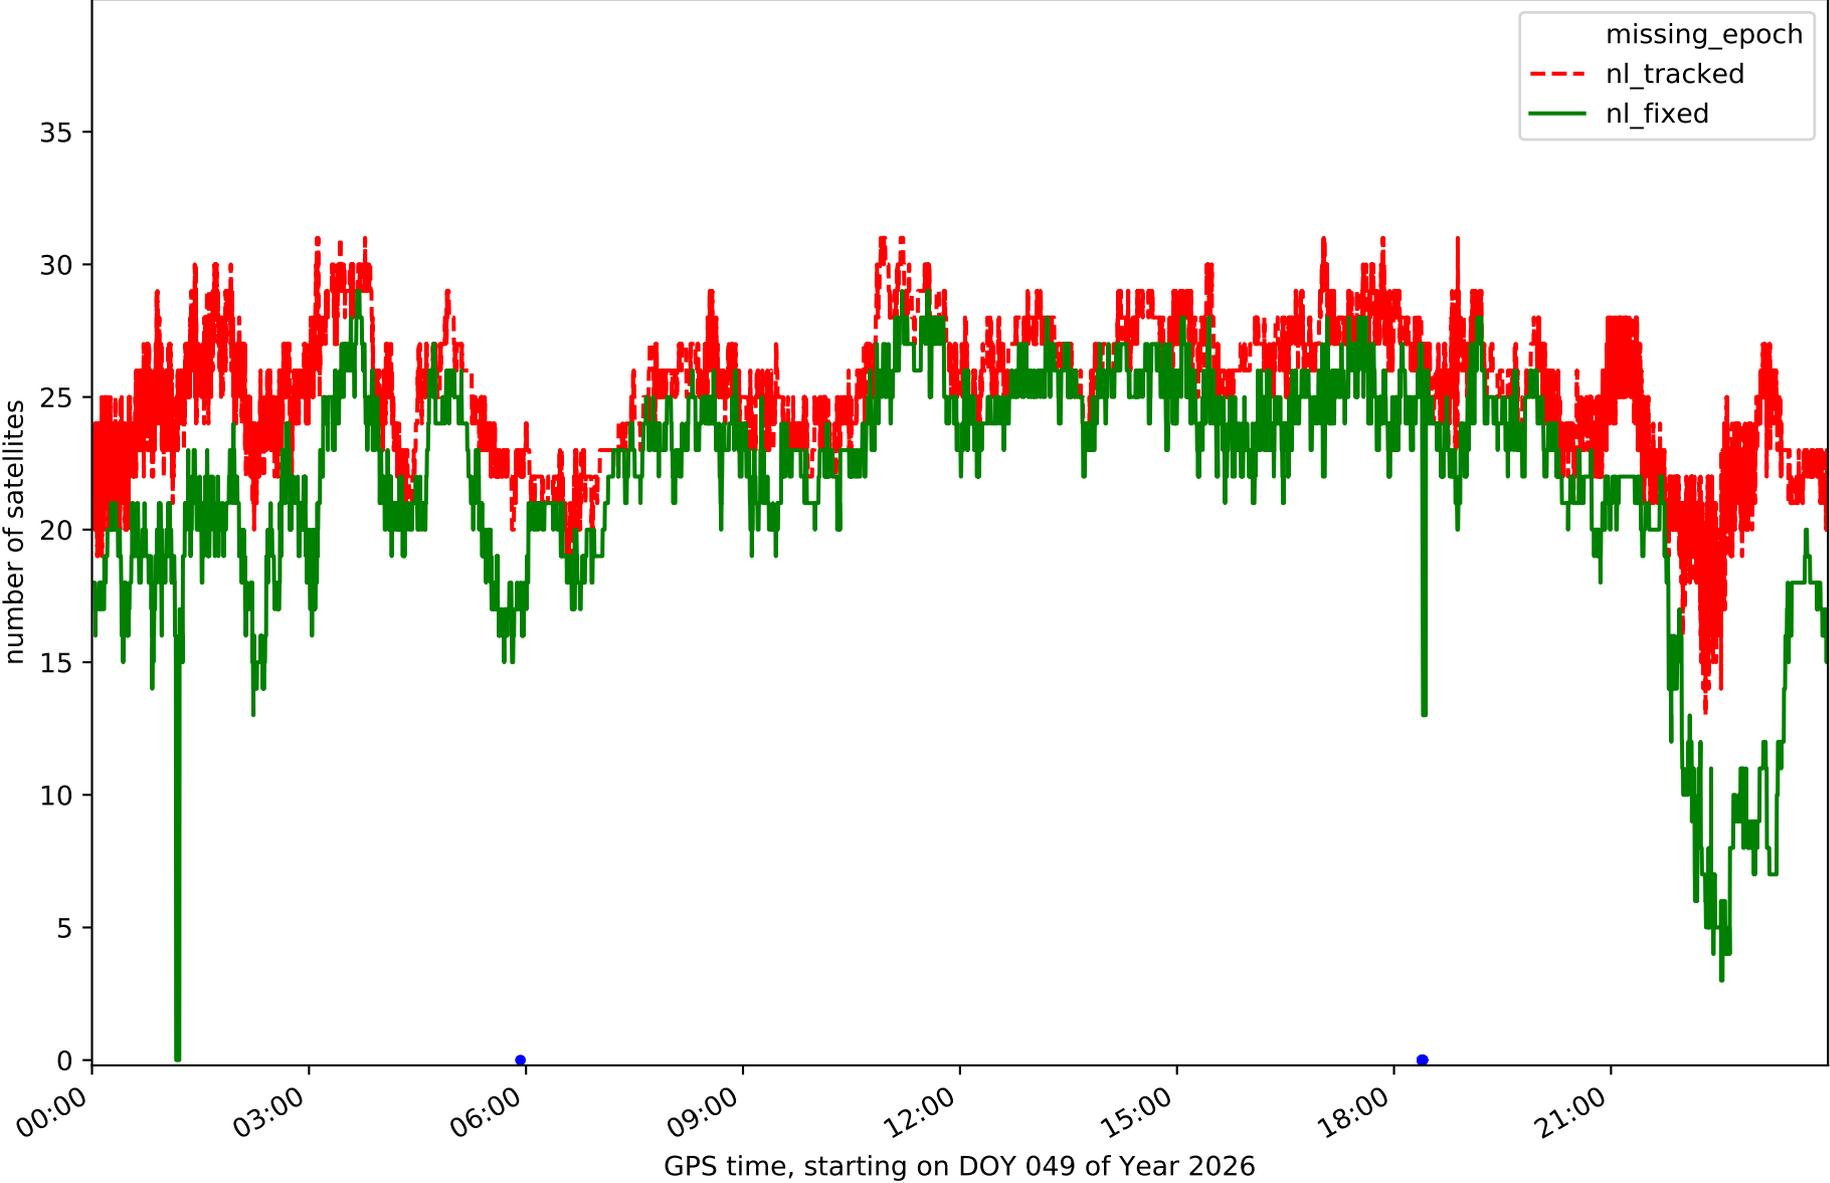


Station TN03 in network N32T

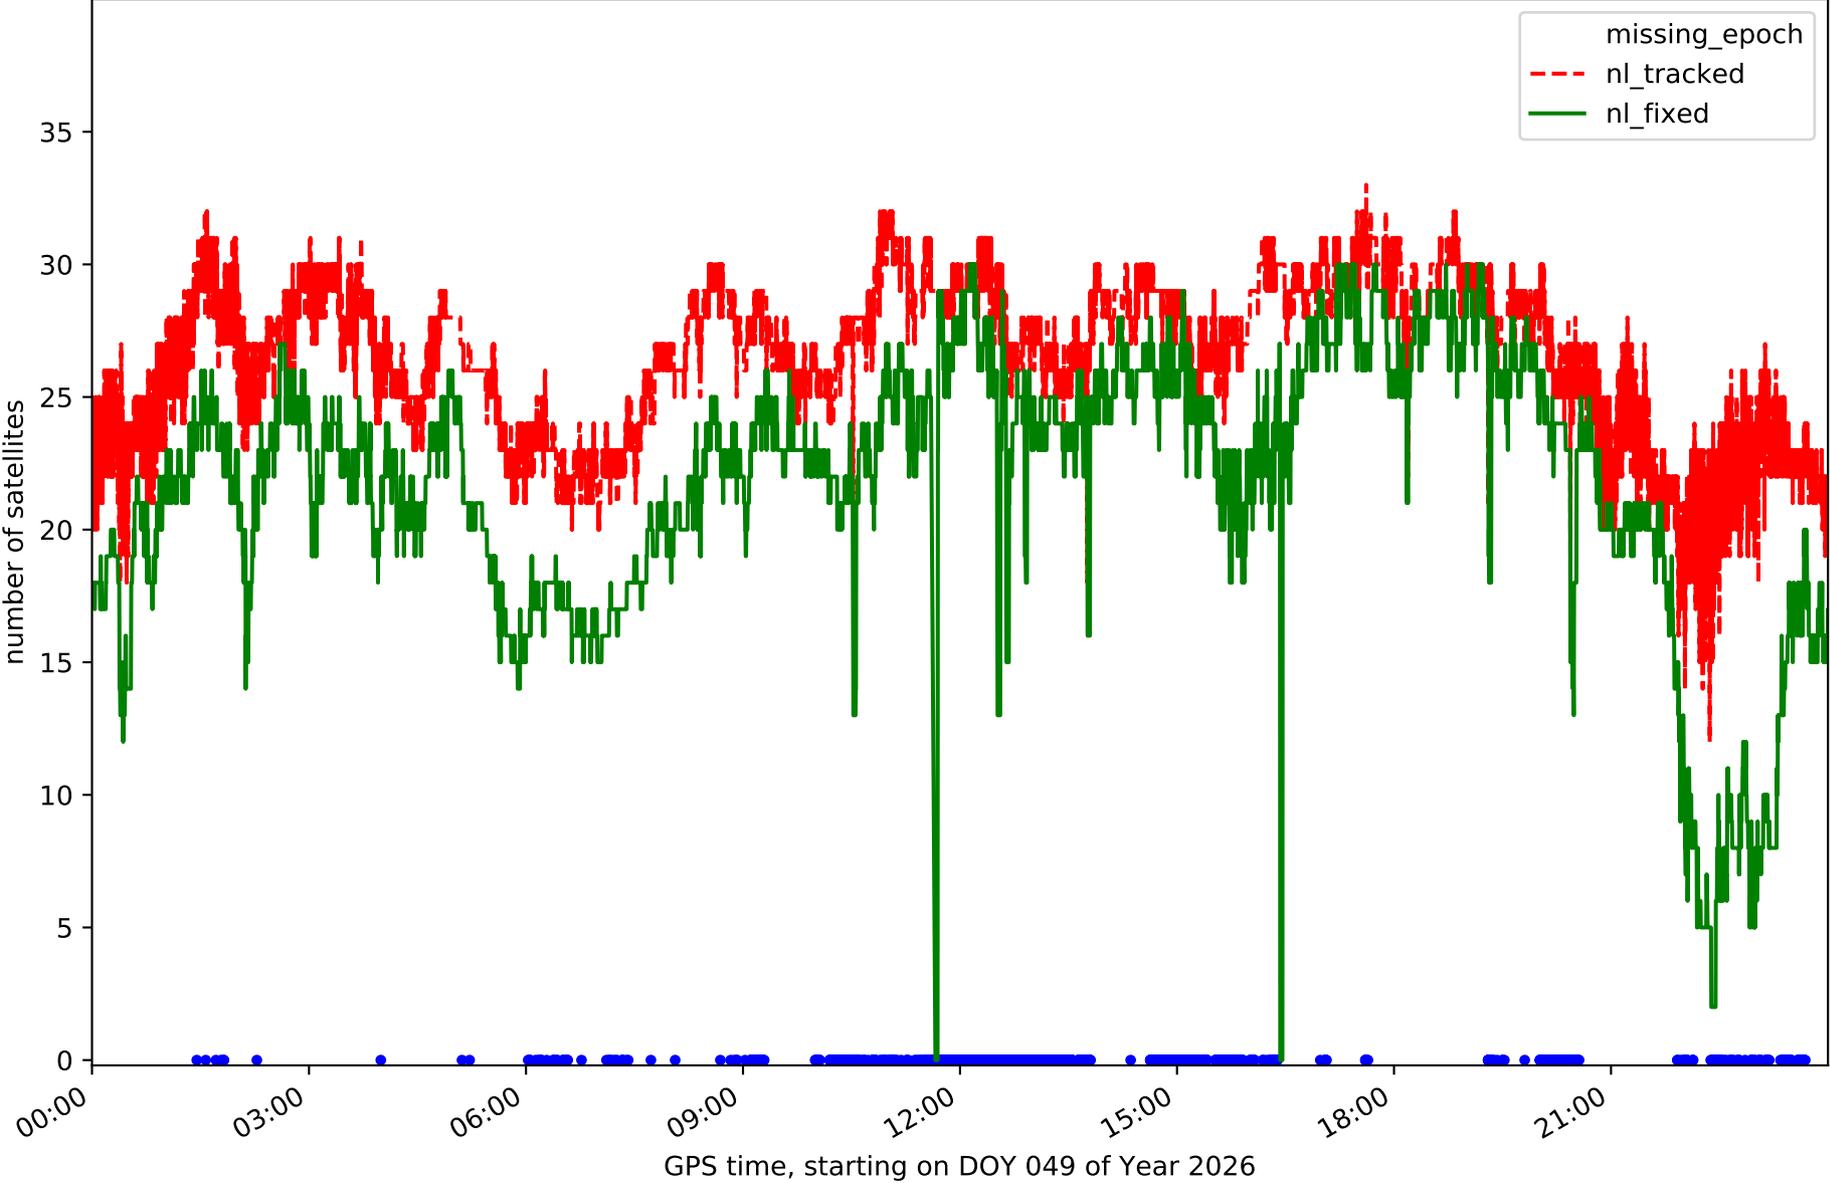


Station TN06 in network N32T

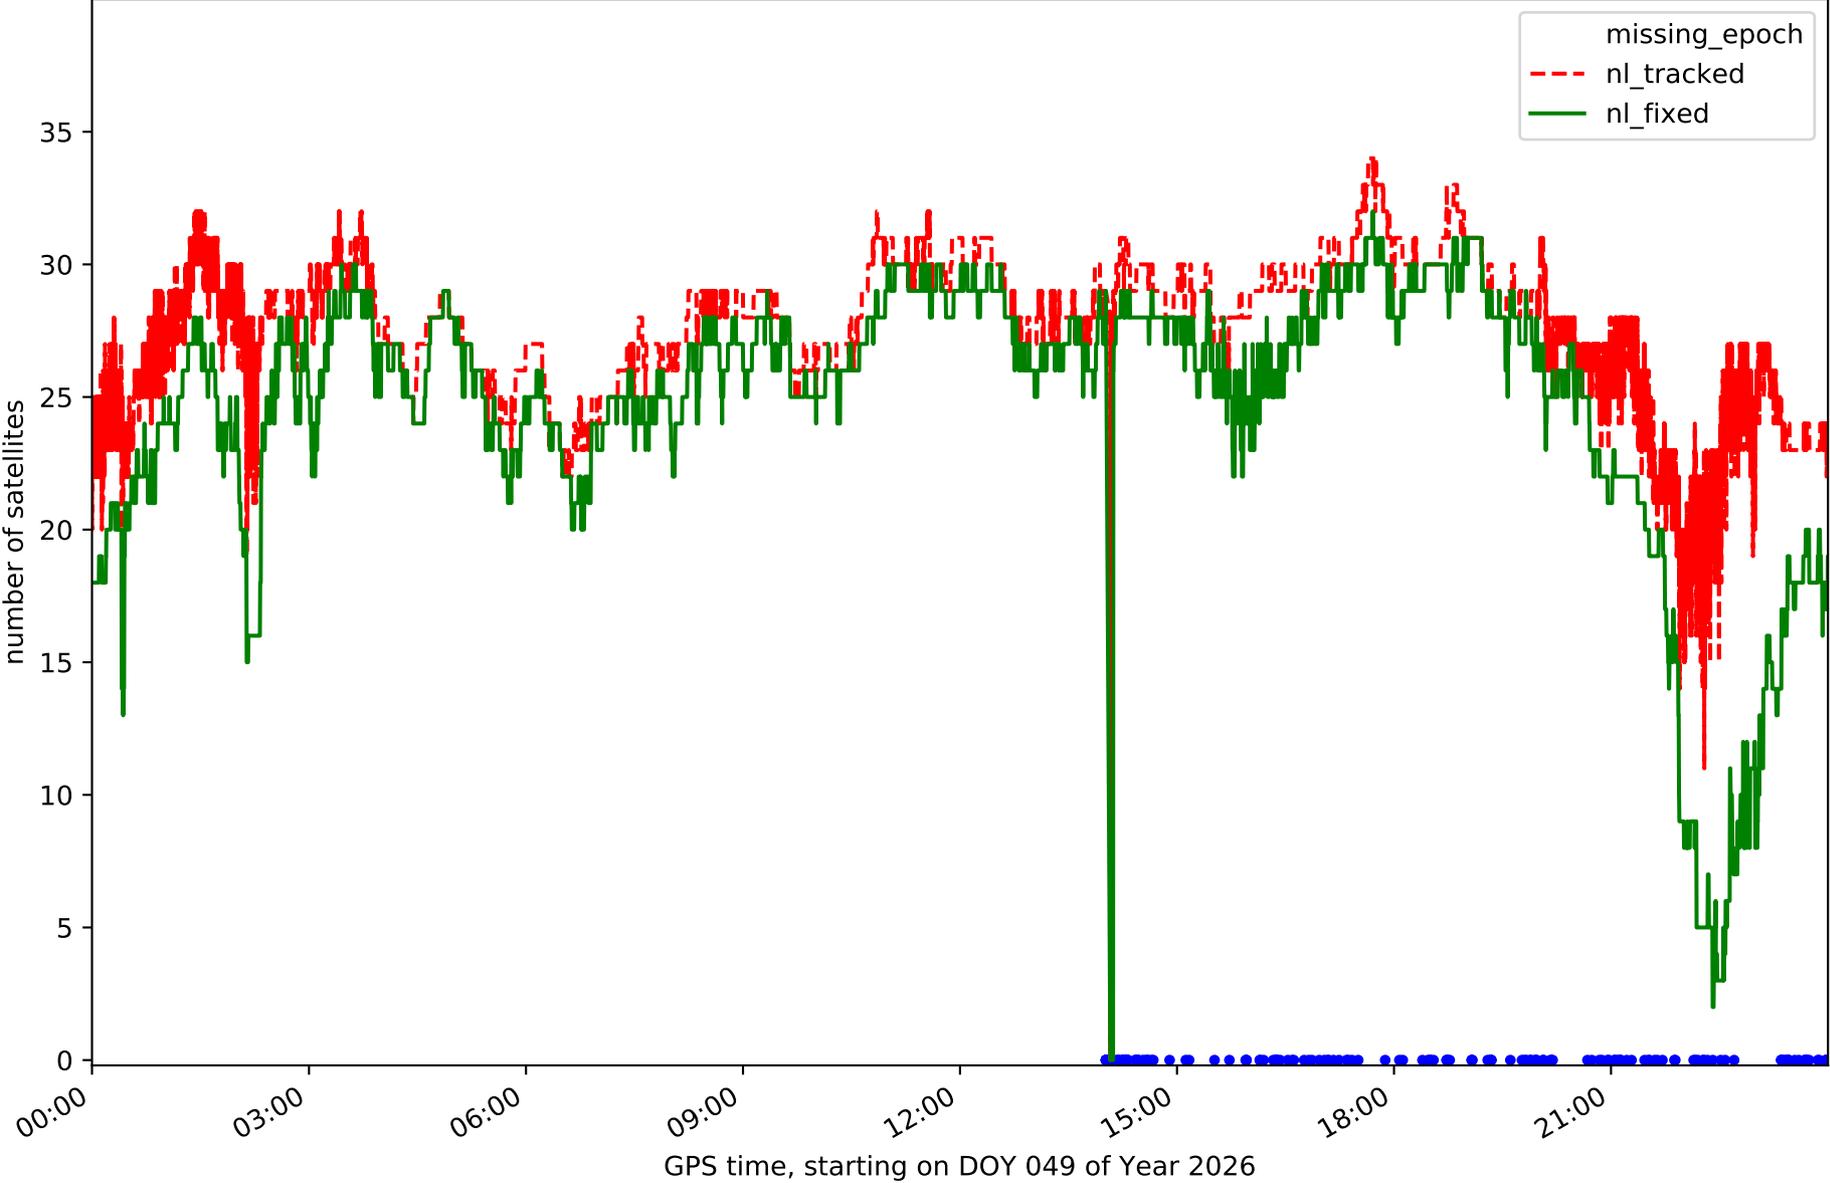


Station TN09 in network N32T

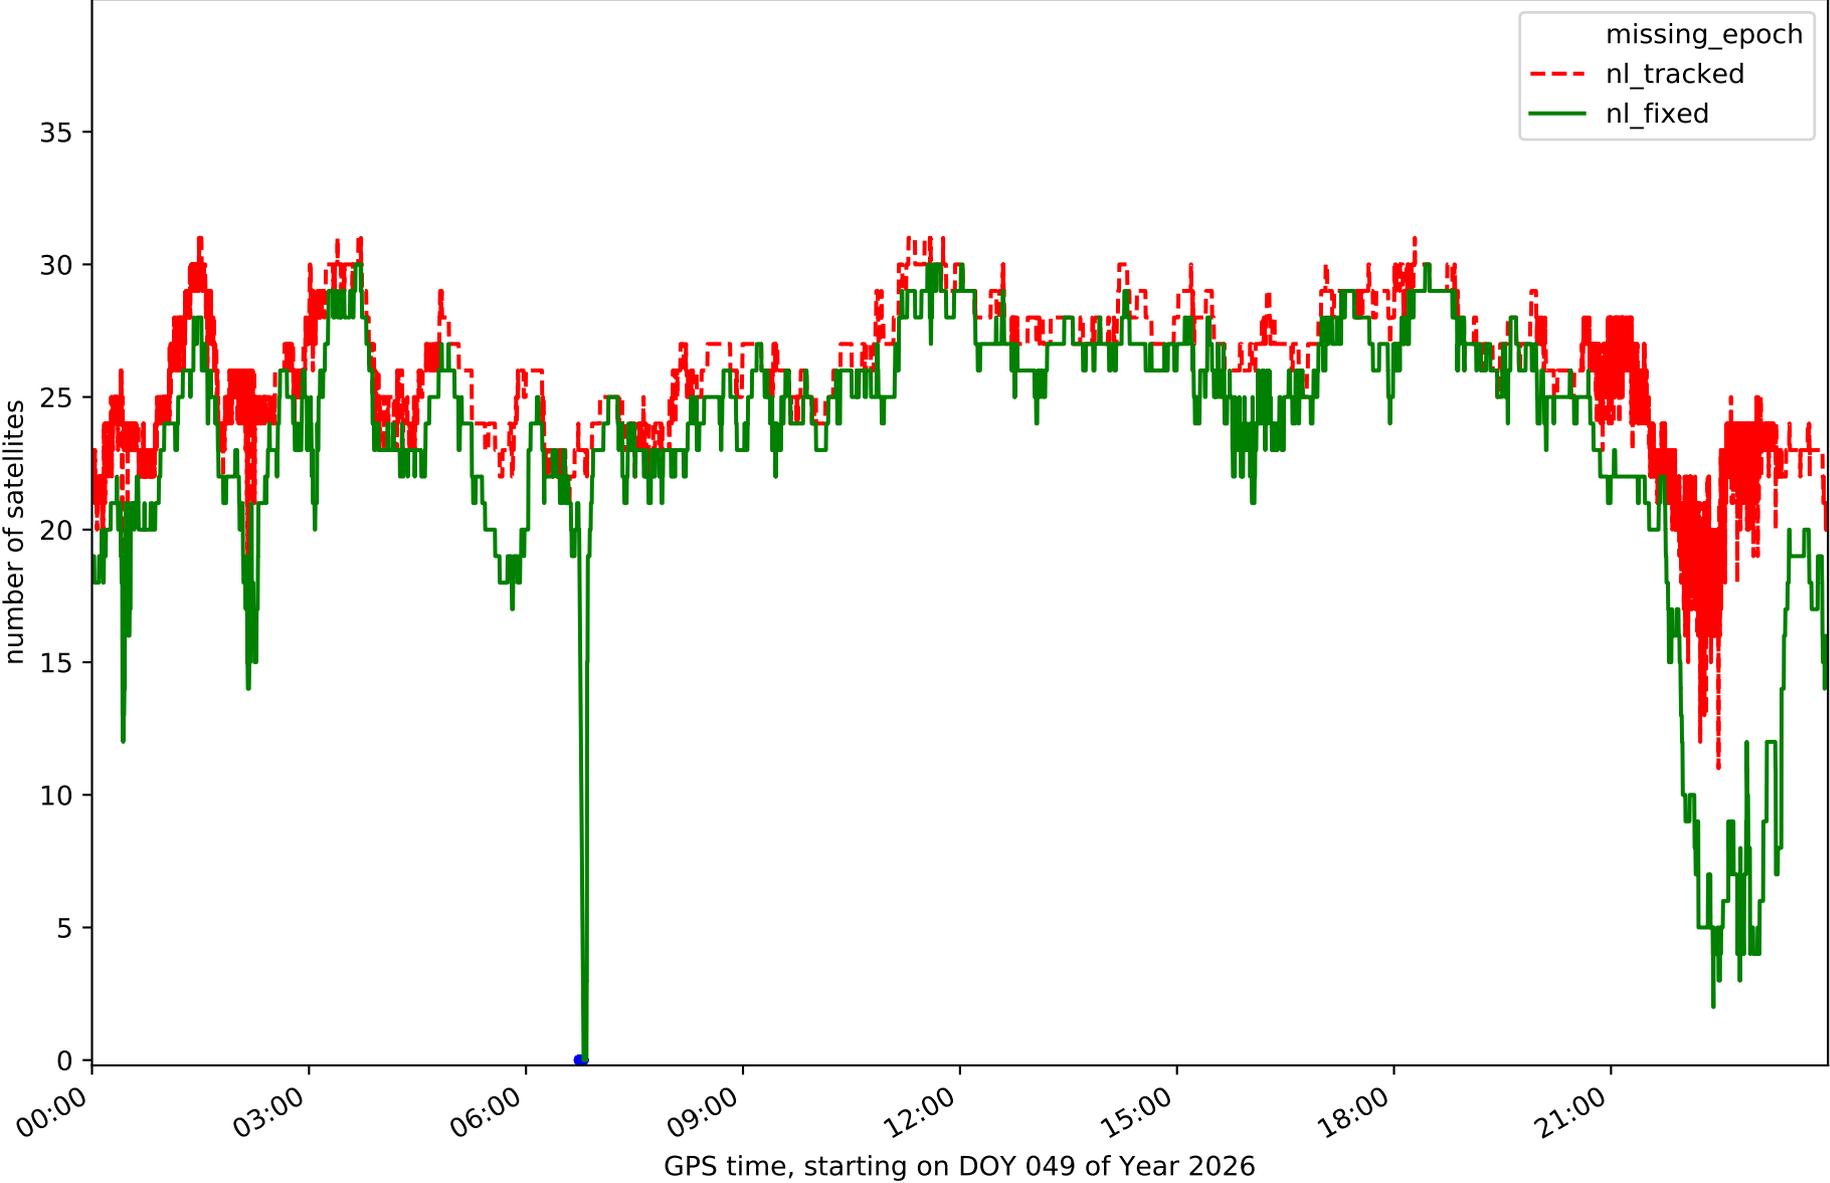


Station TE11 in network N32T

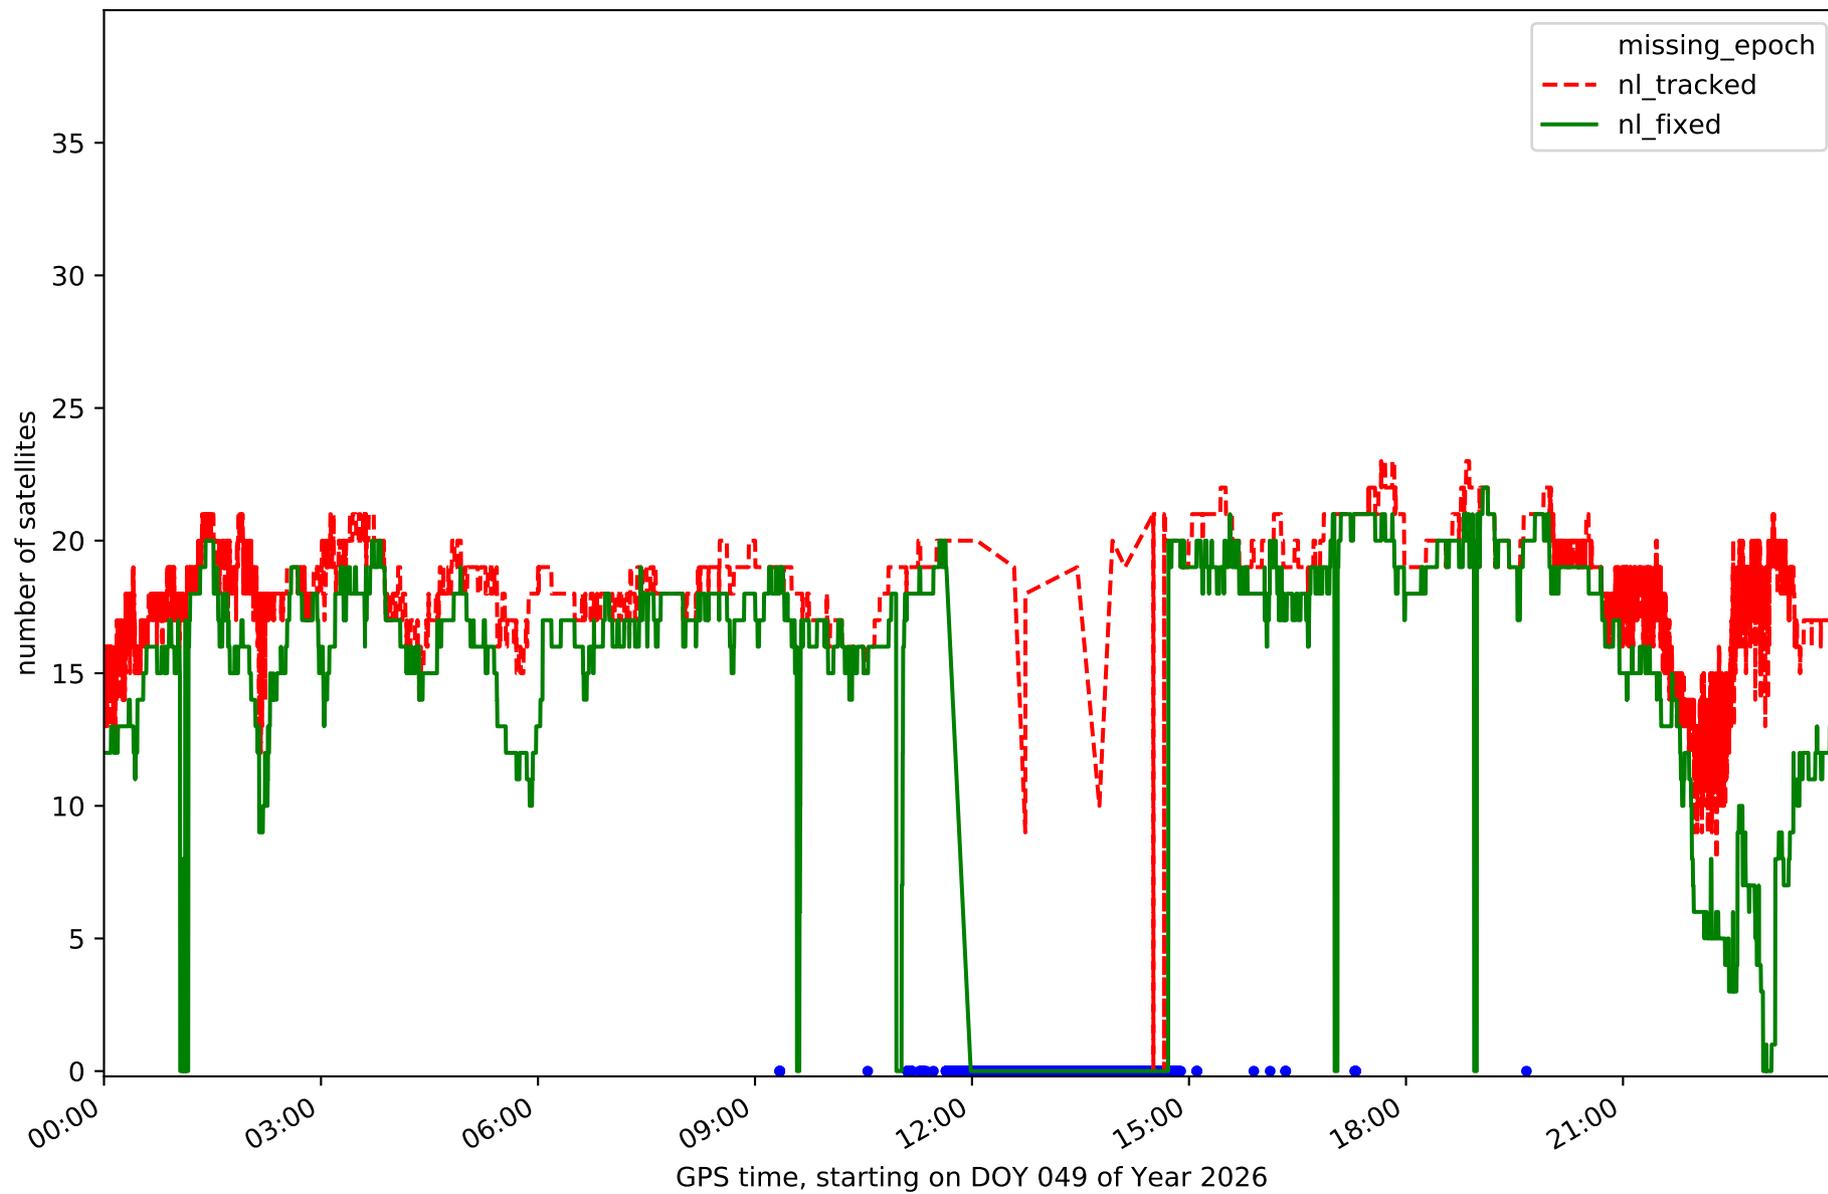


RefCheck for station EH01 in network N32T

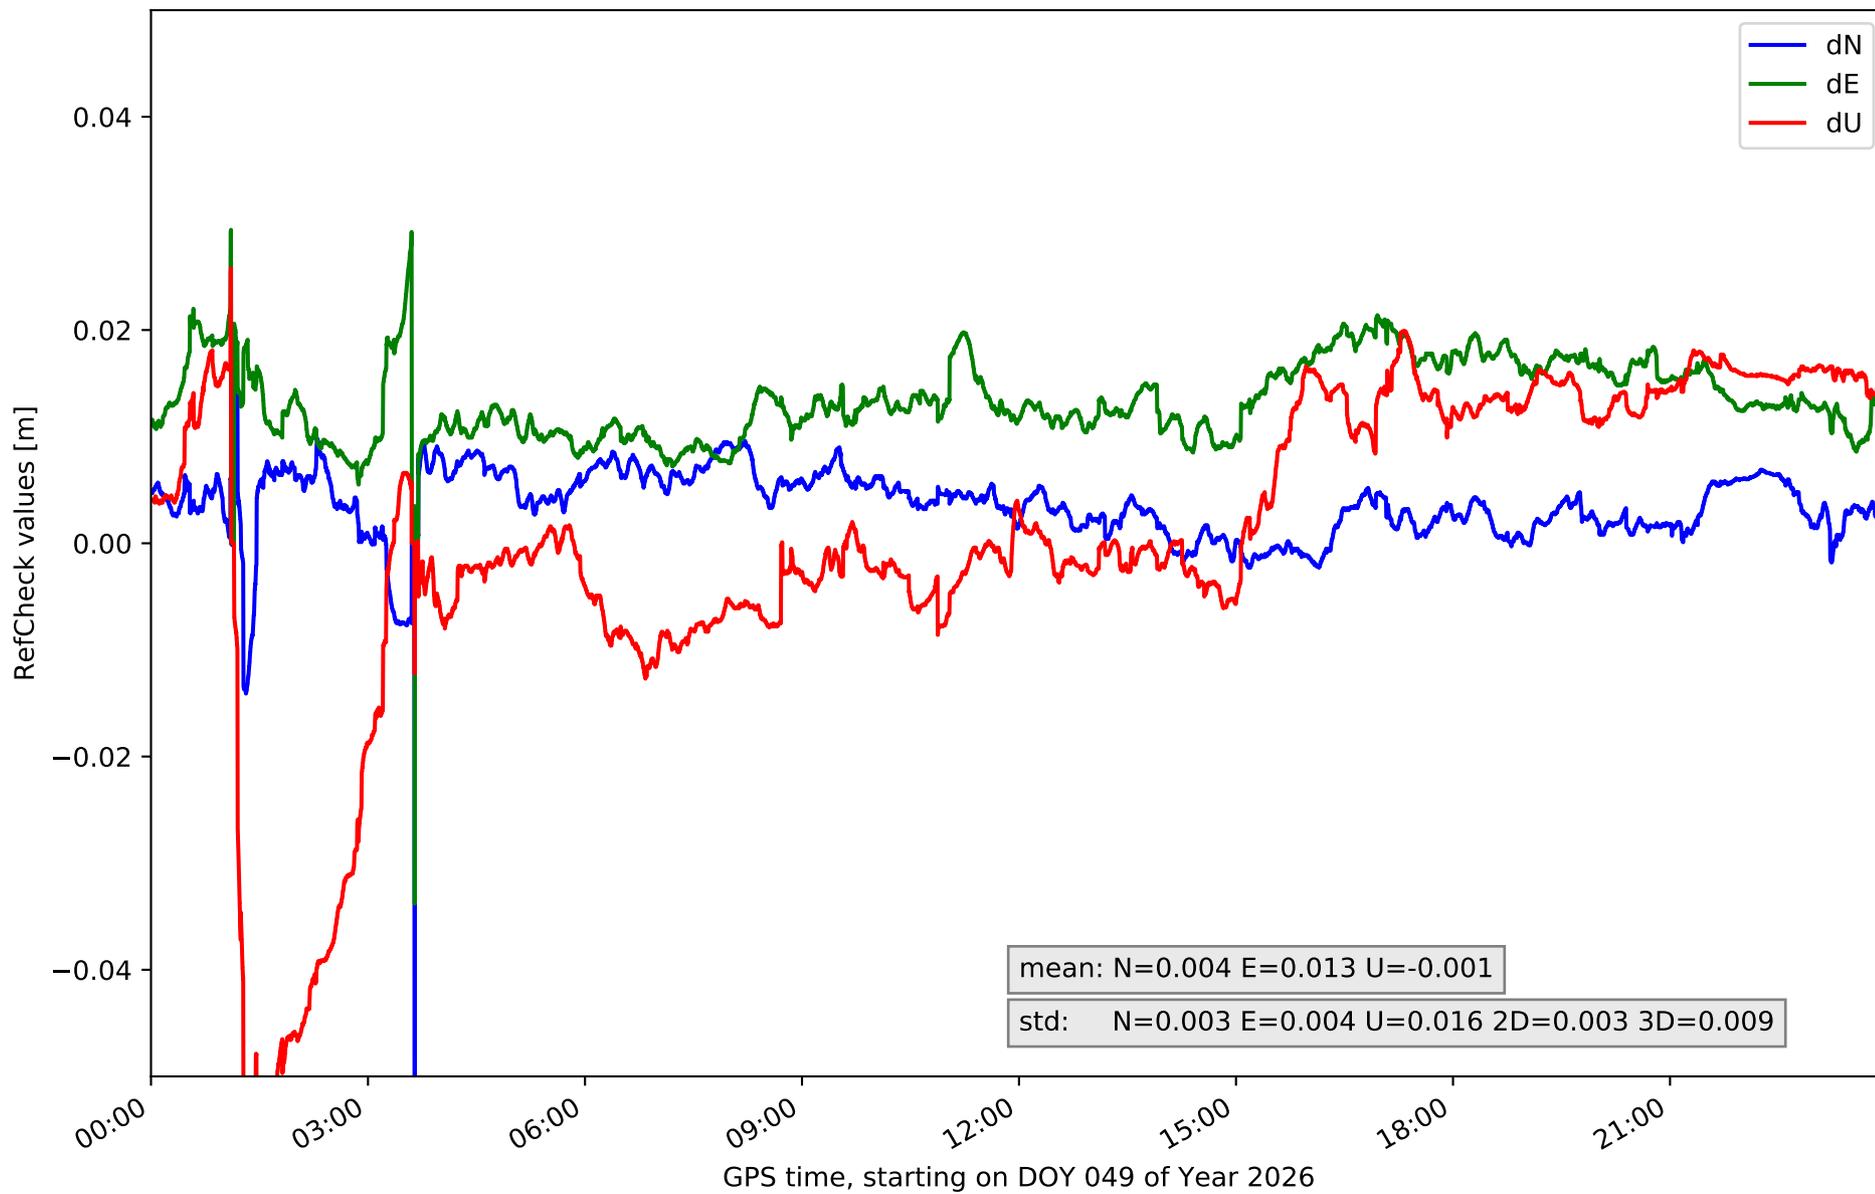


RefCheck for station EH02 in network N32T

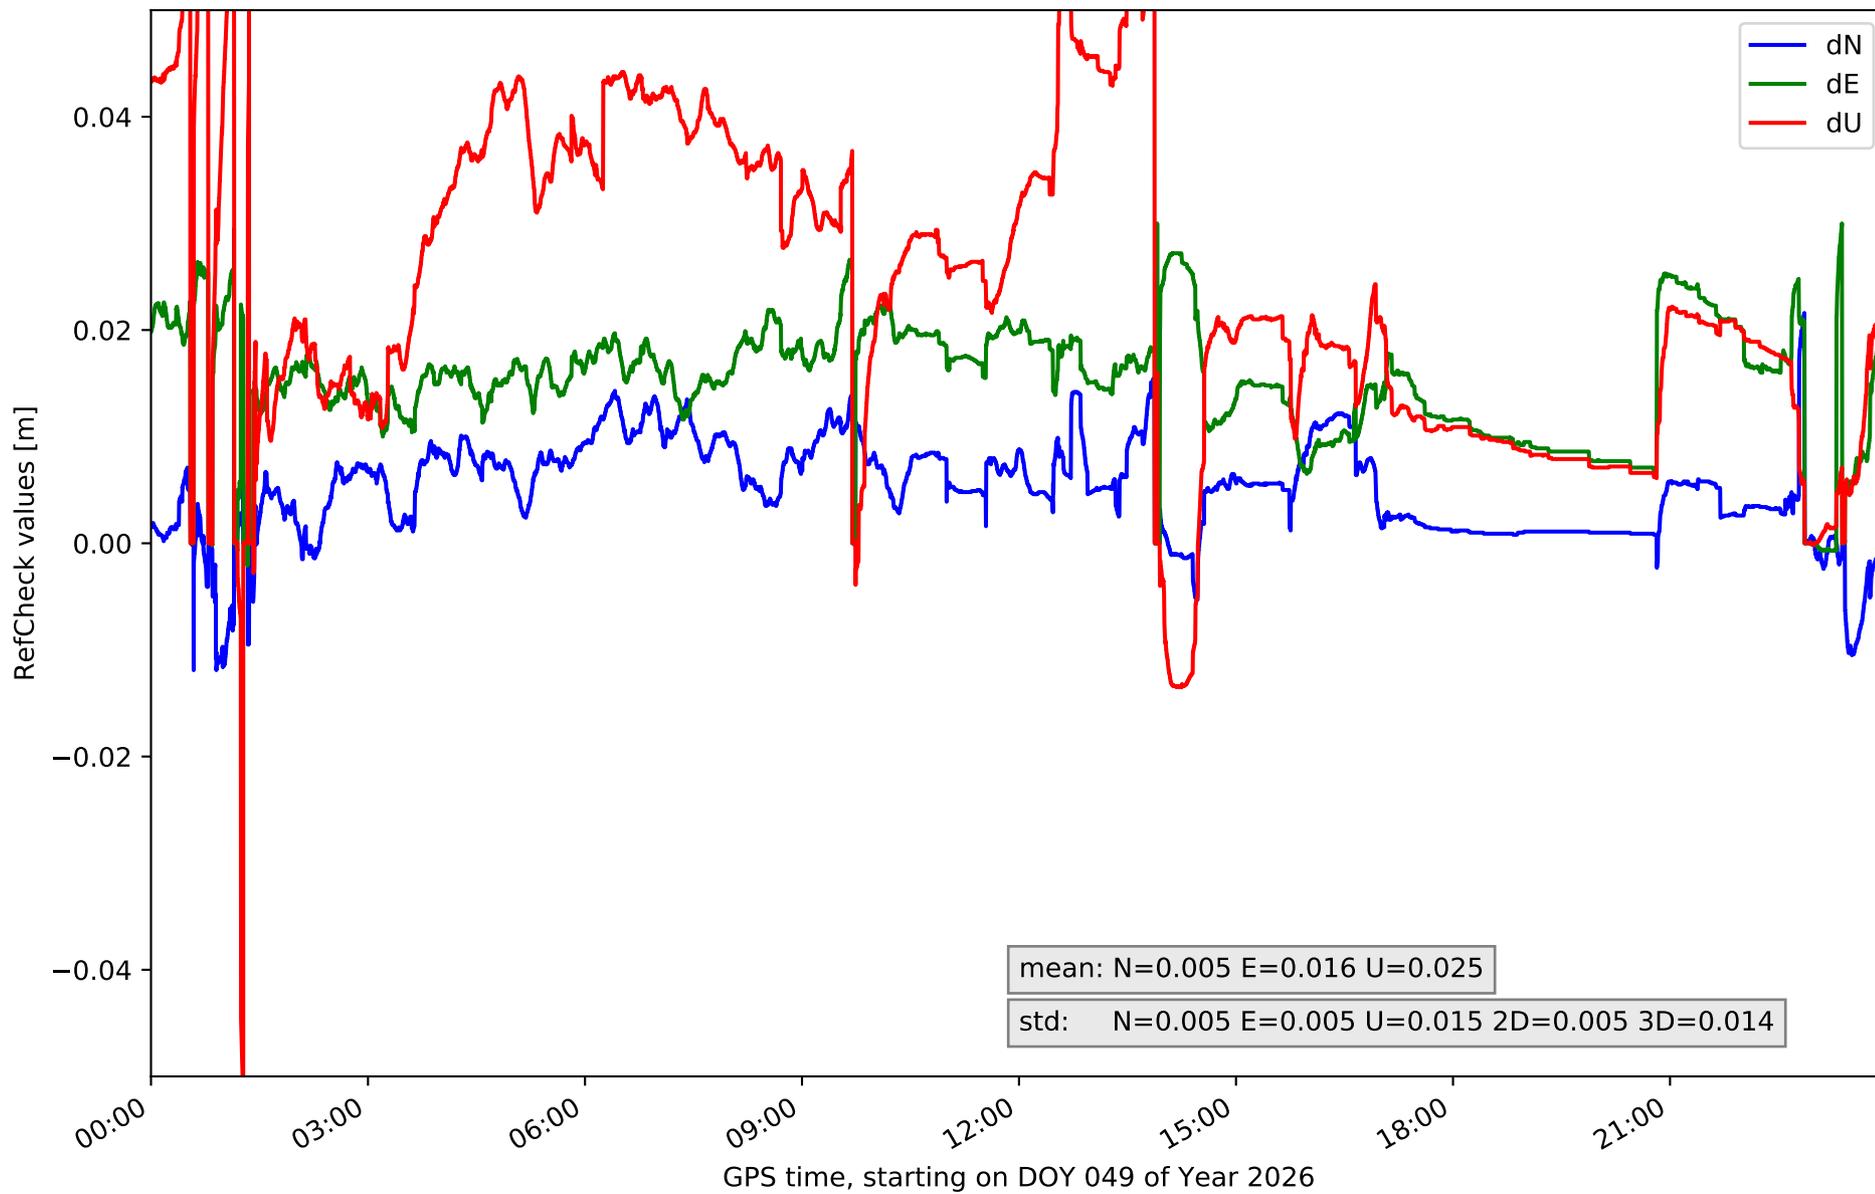


RefCheck for station GOM1 in network N32T

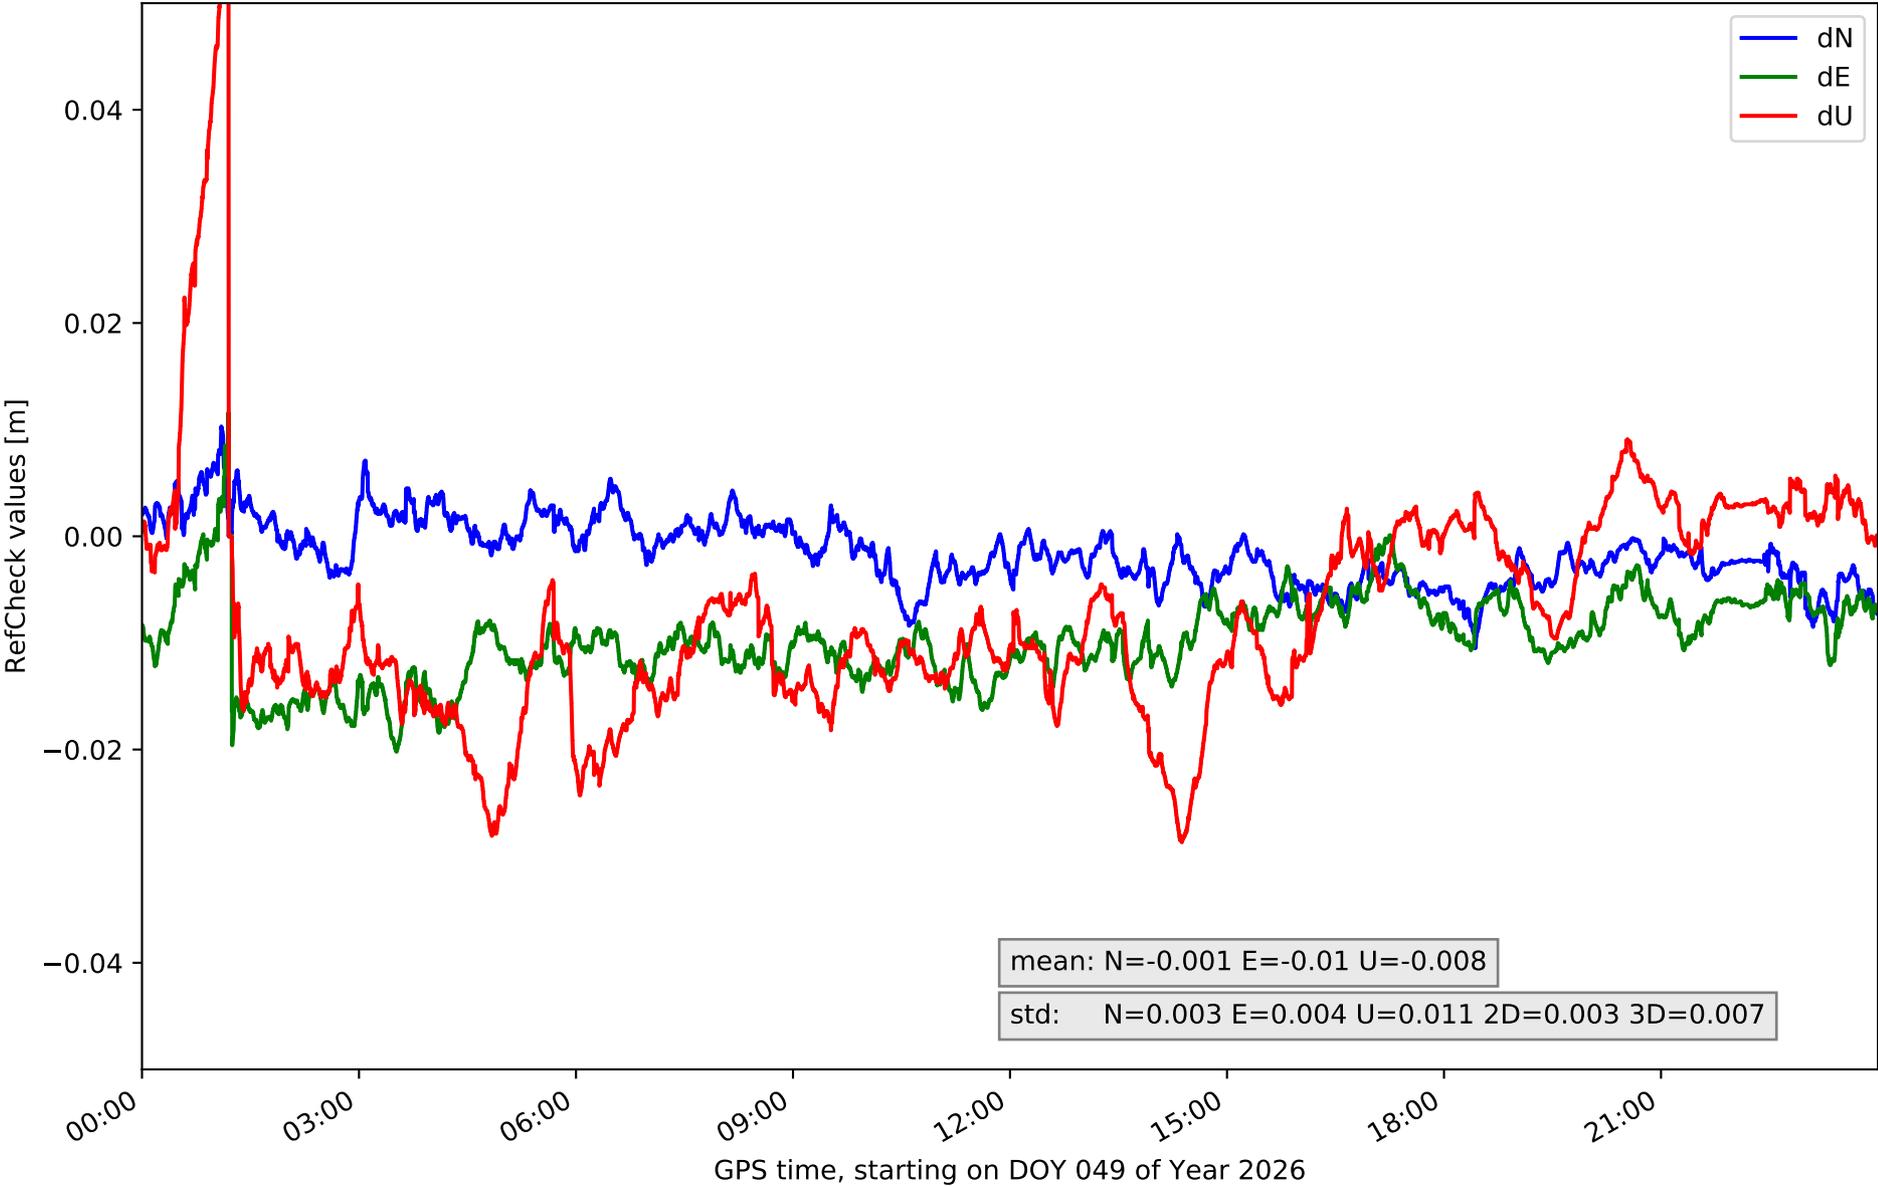


RefCheck for station GOME in network N32T

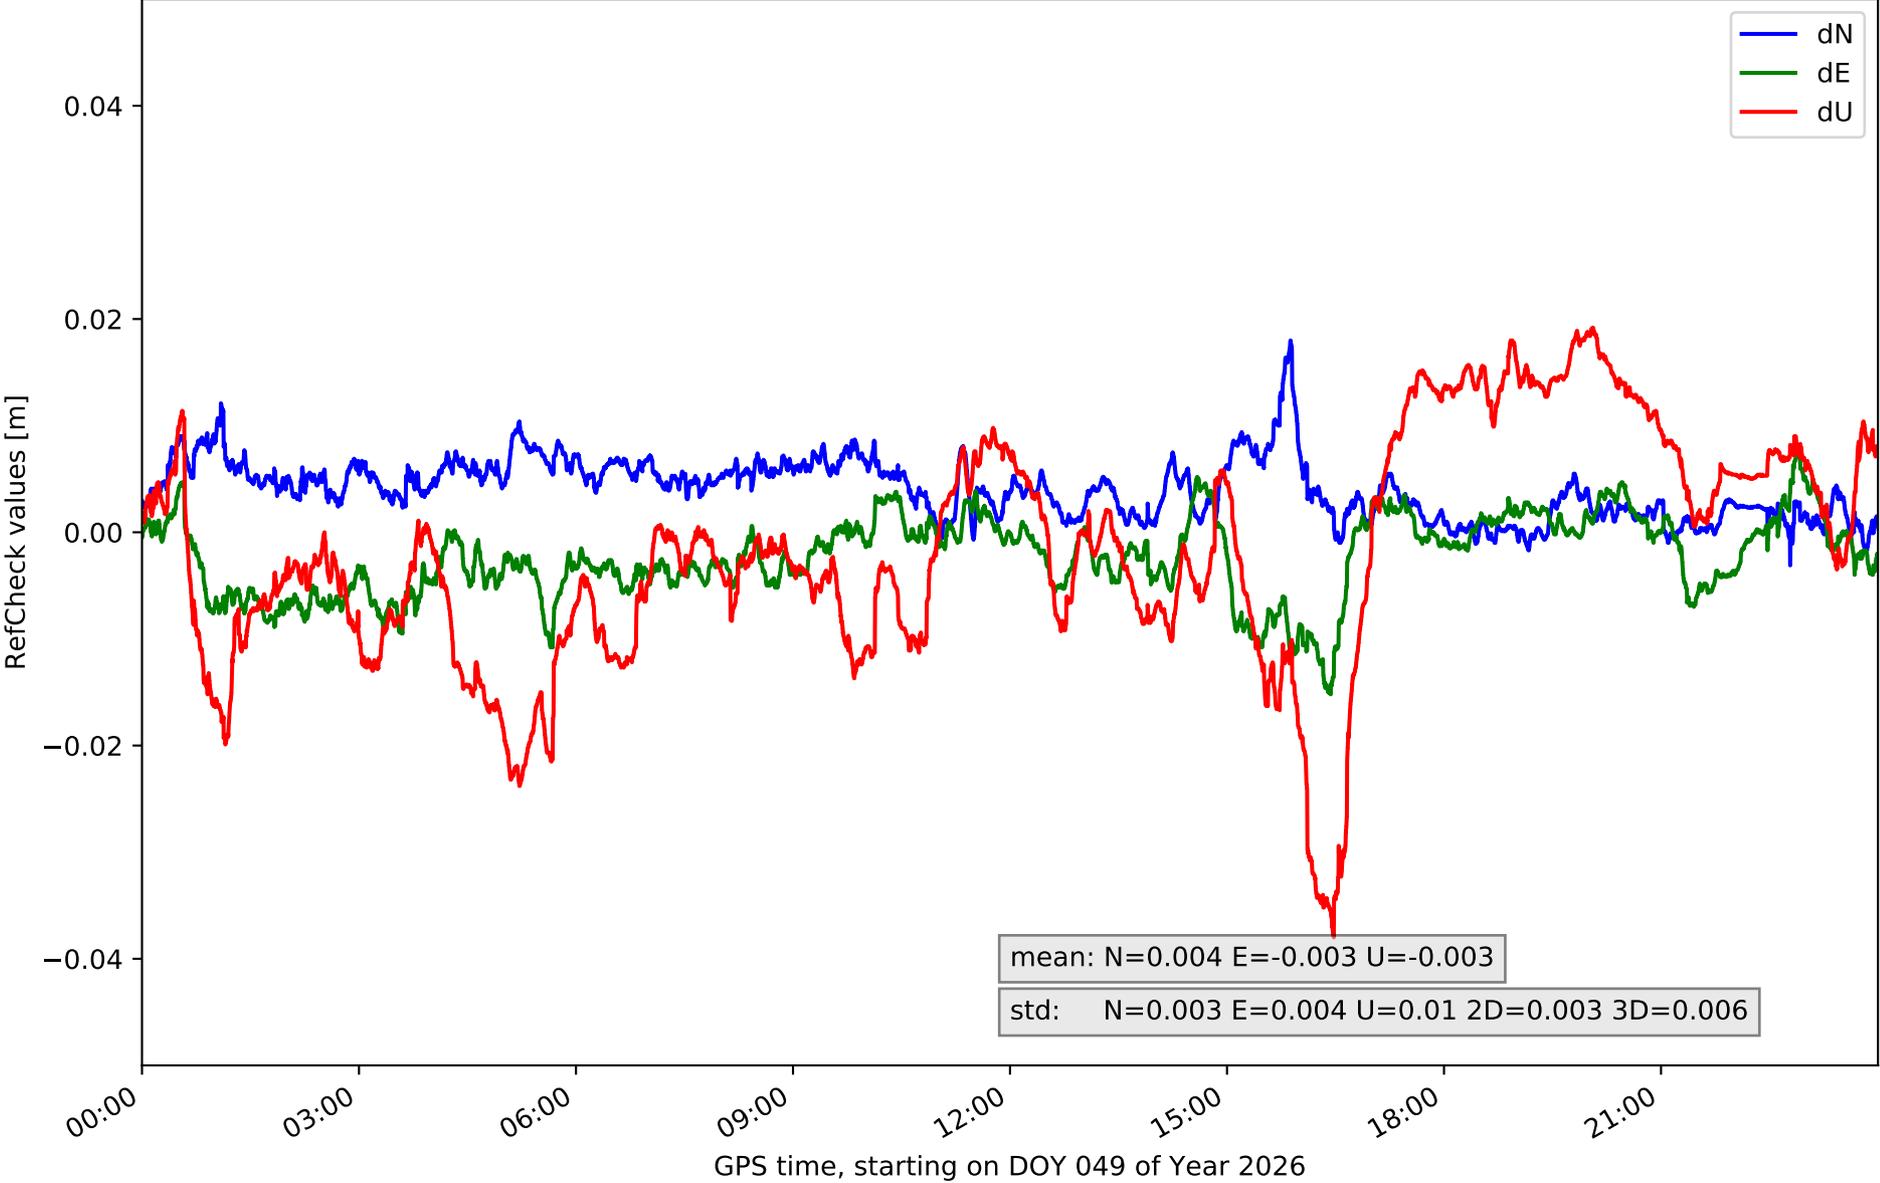


RefCheck for station IZAN in network N32T

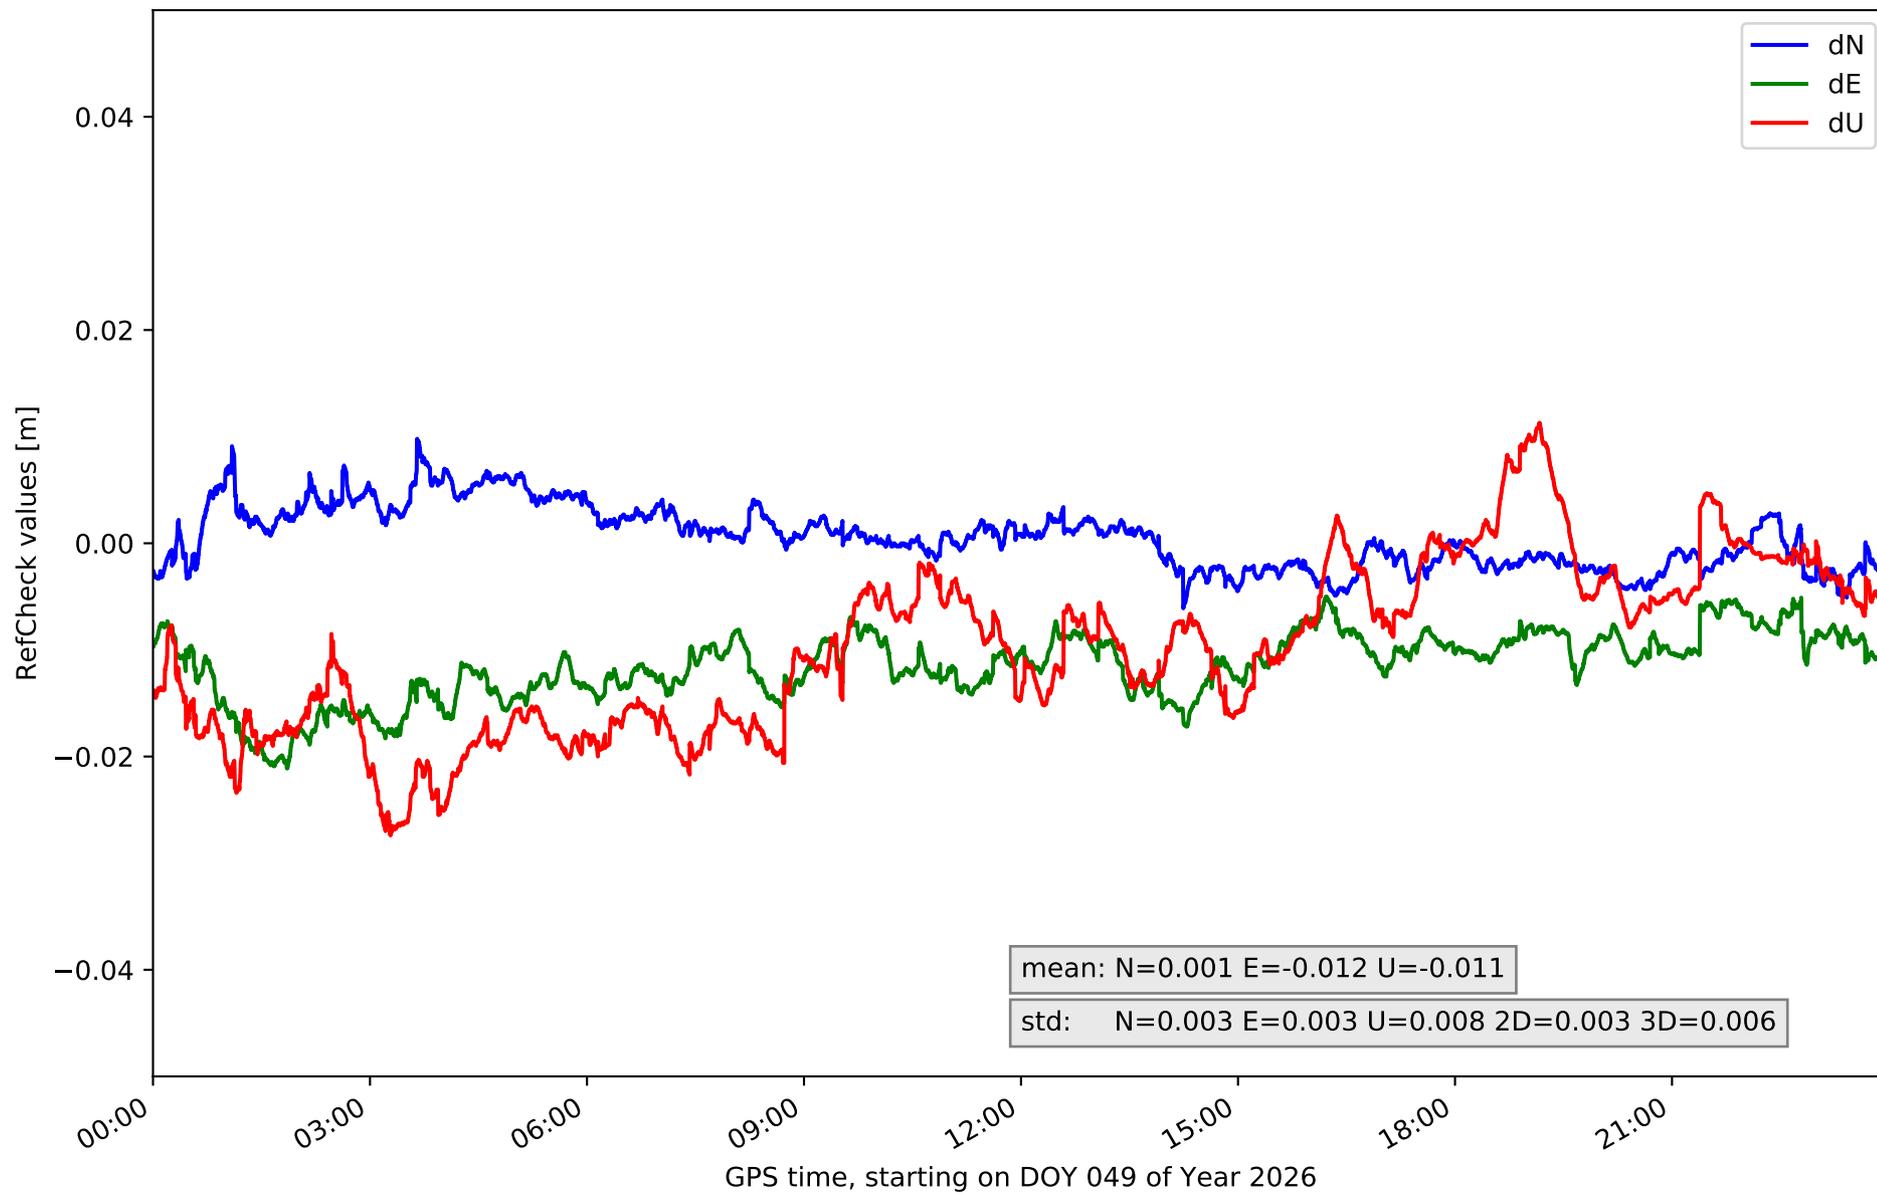


RefCheck for station LP01 in network N32T

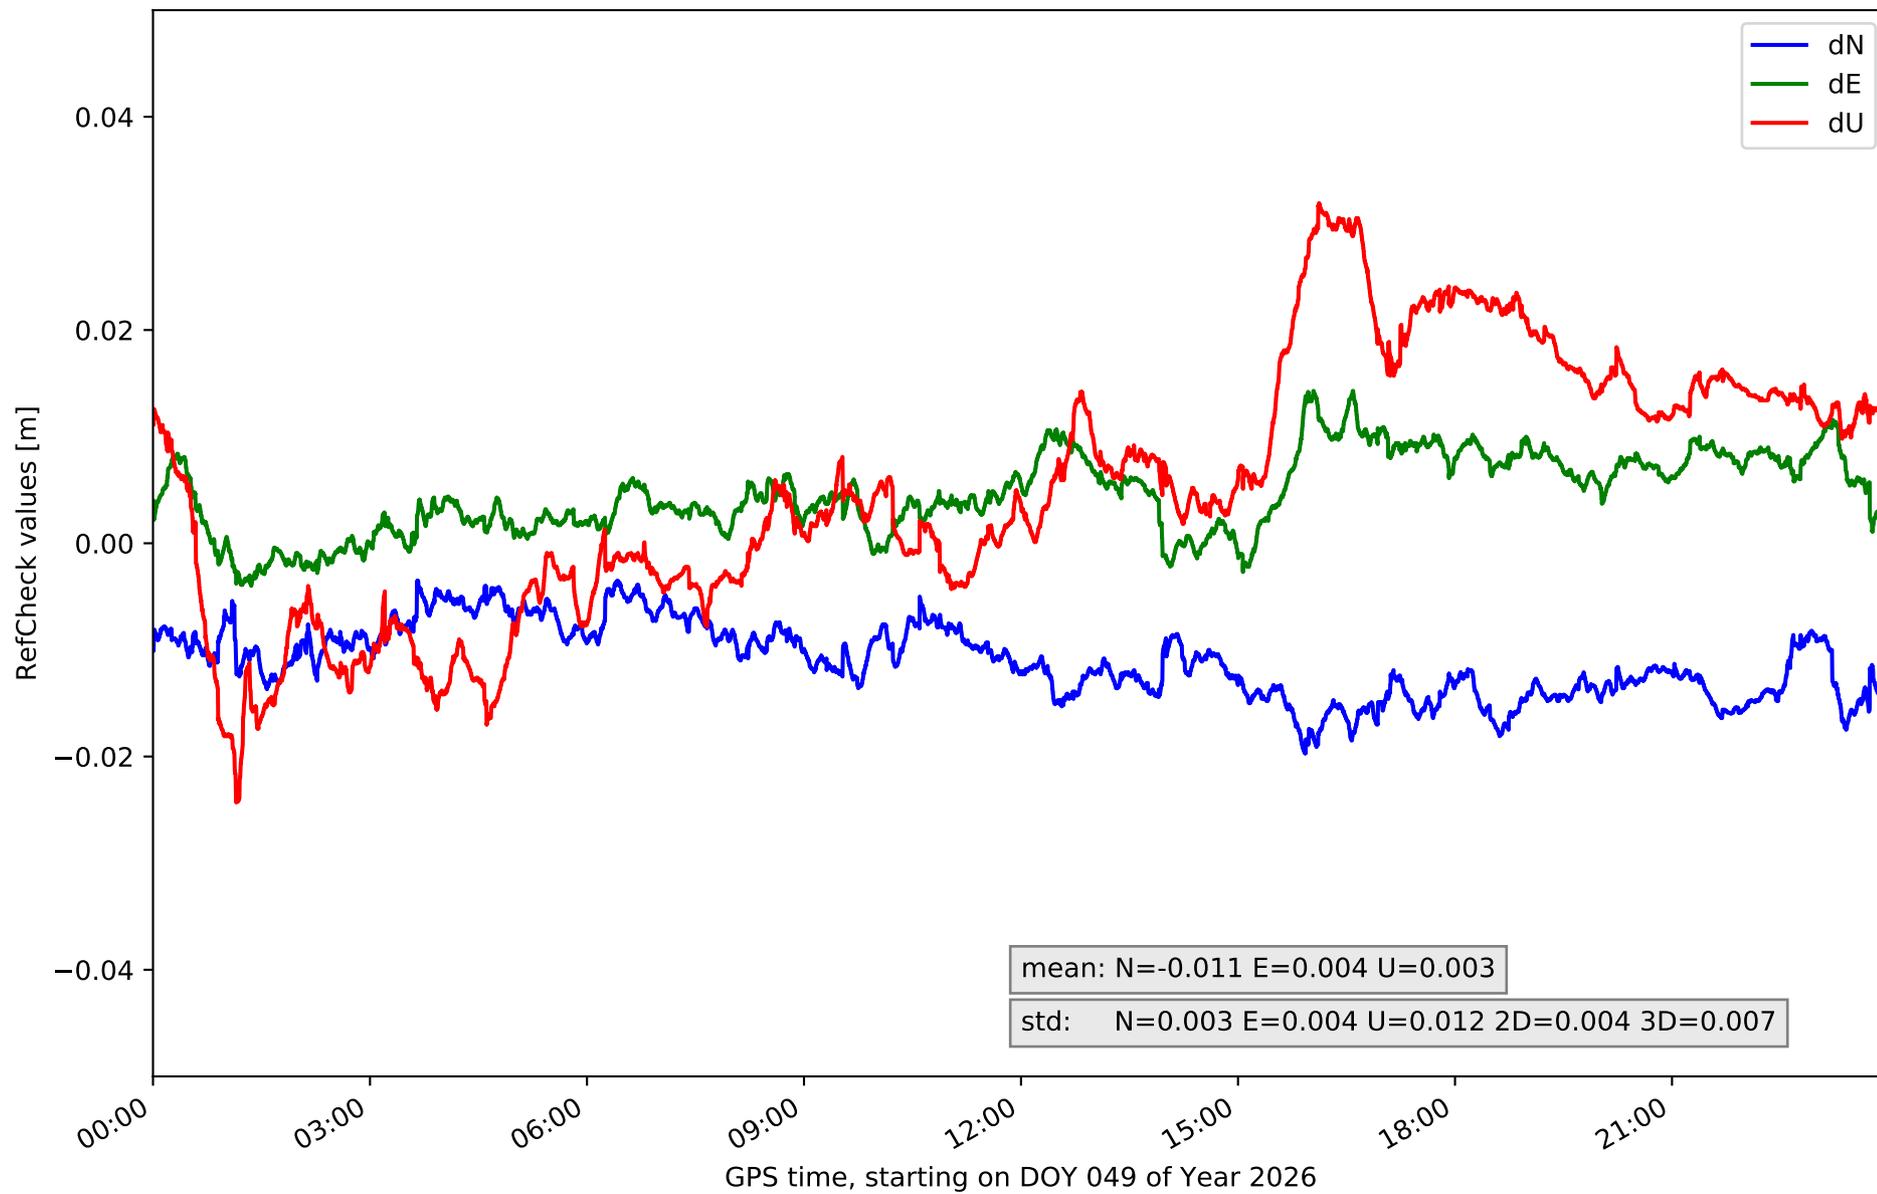


RefCheck for station LP03 in network N32T

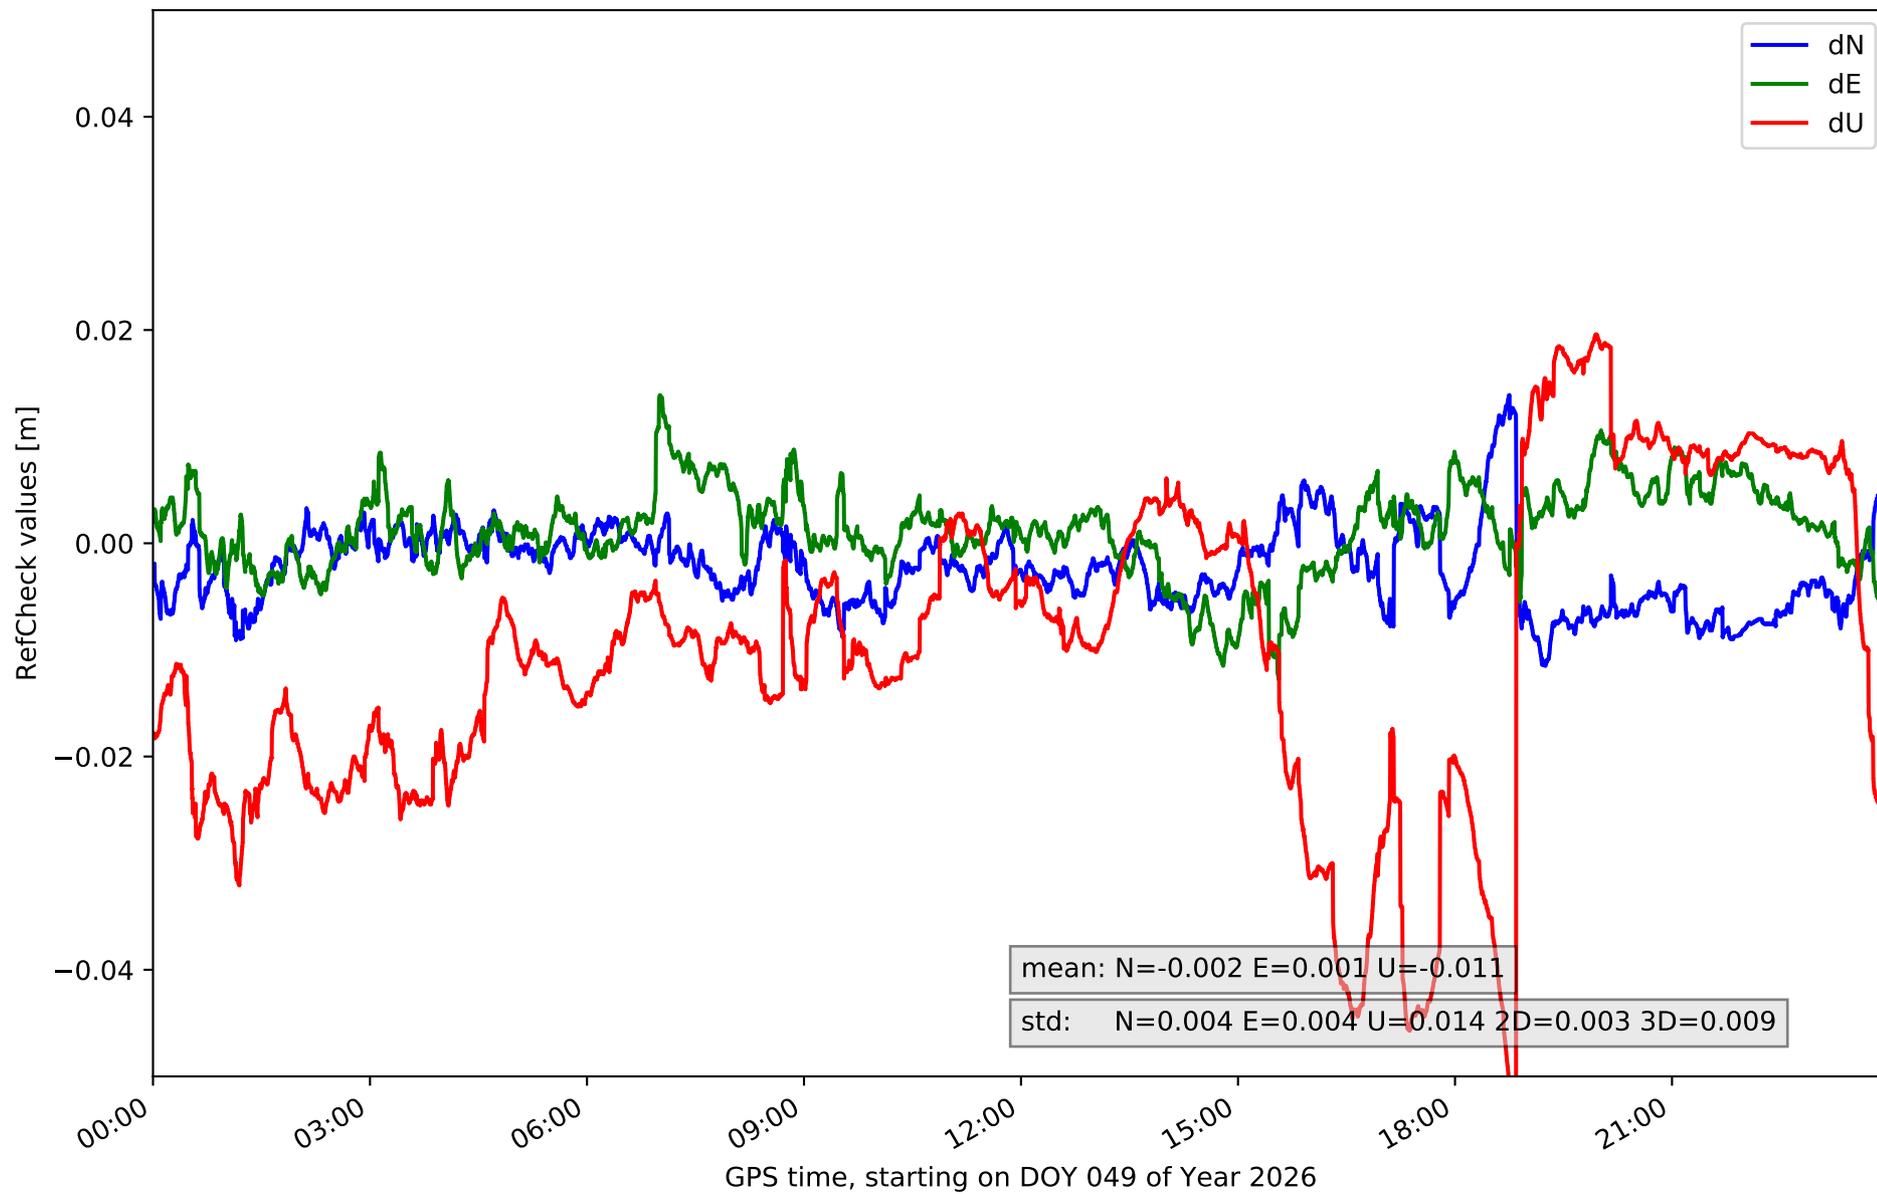


RefCheck for station LPAL in network N32T

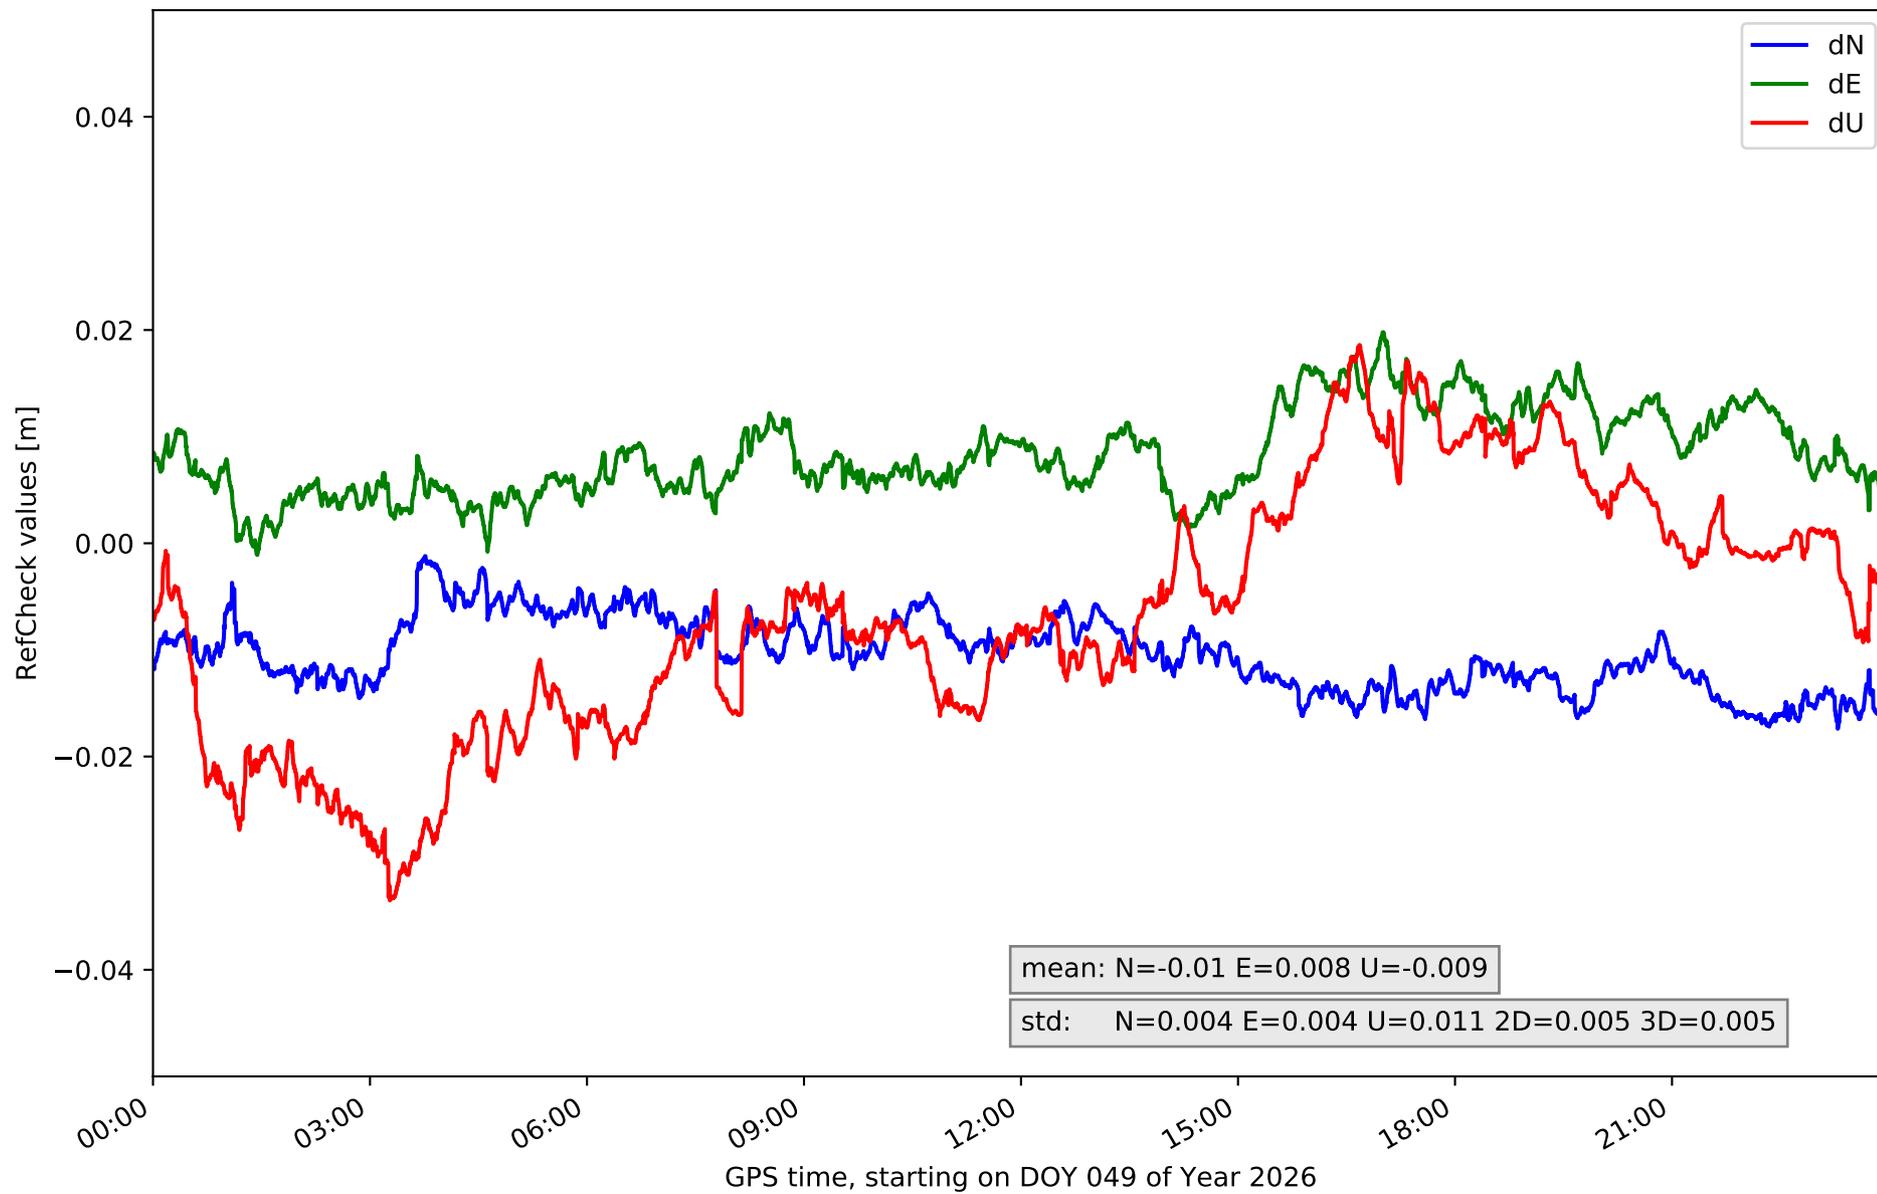


RefCheck for station LRES in network N32T

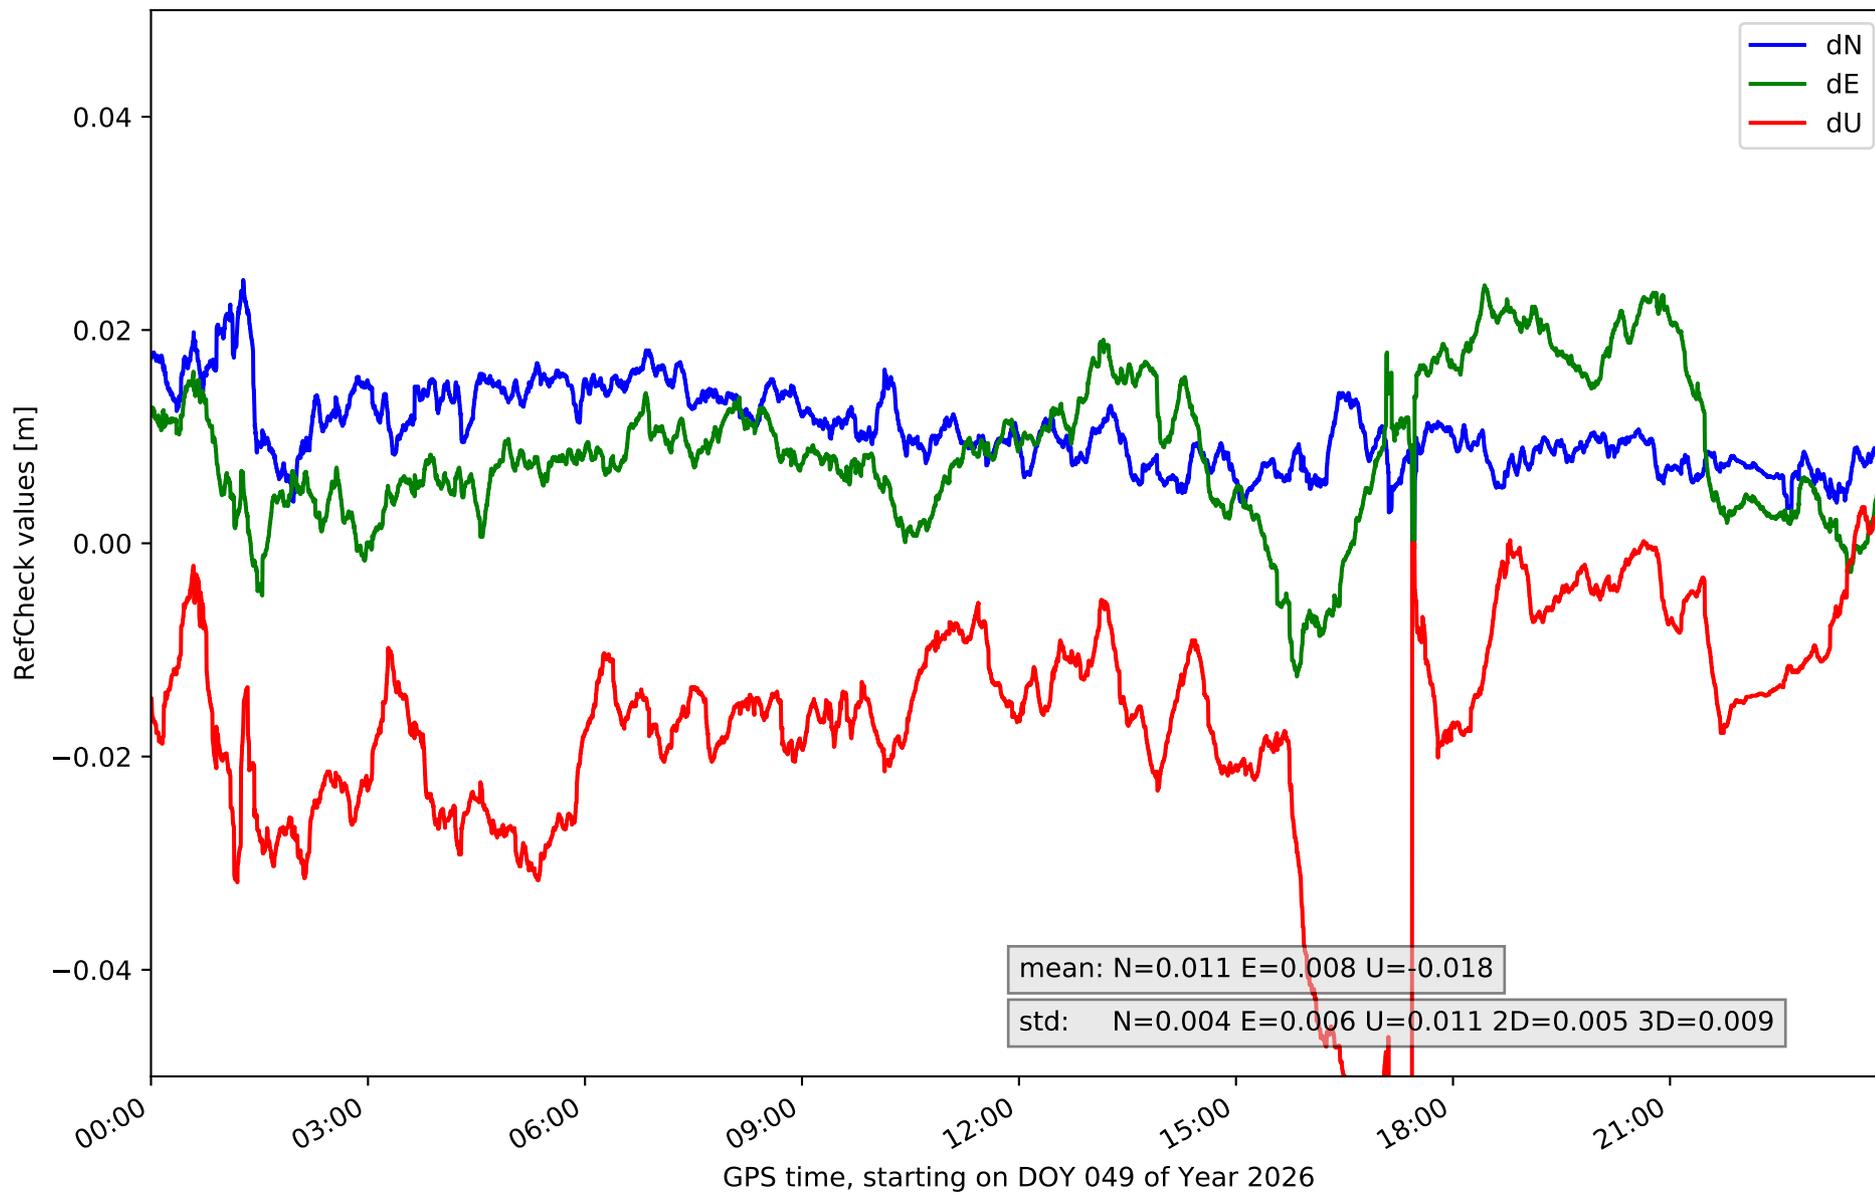


RefCheck for station TN01 in network N32T

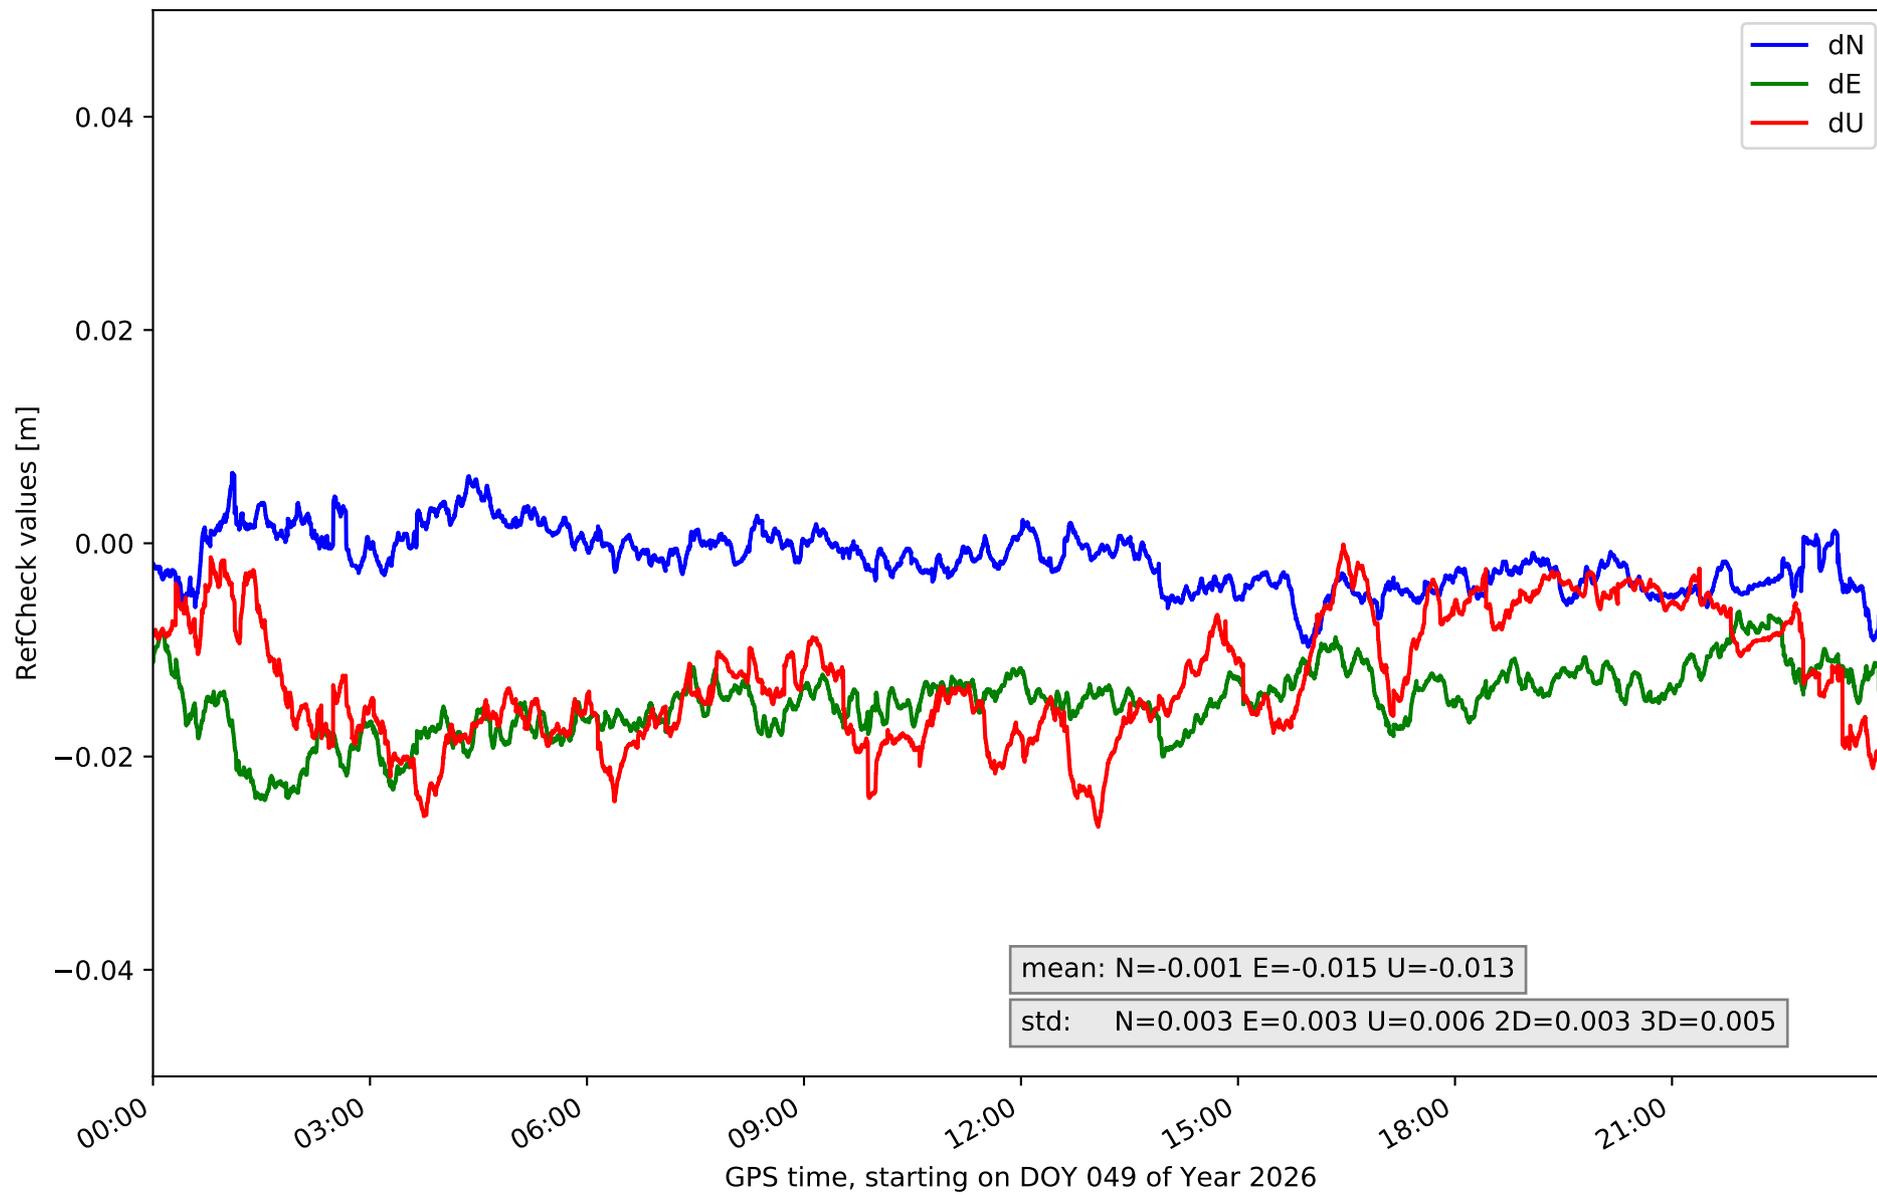


RefCheck for station TN02 in network N32T

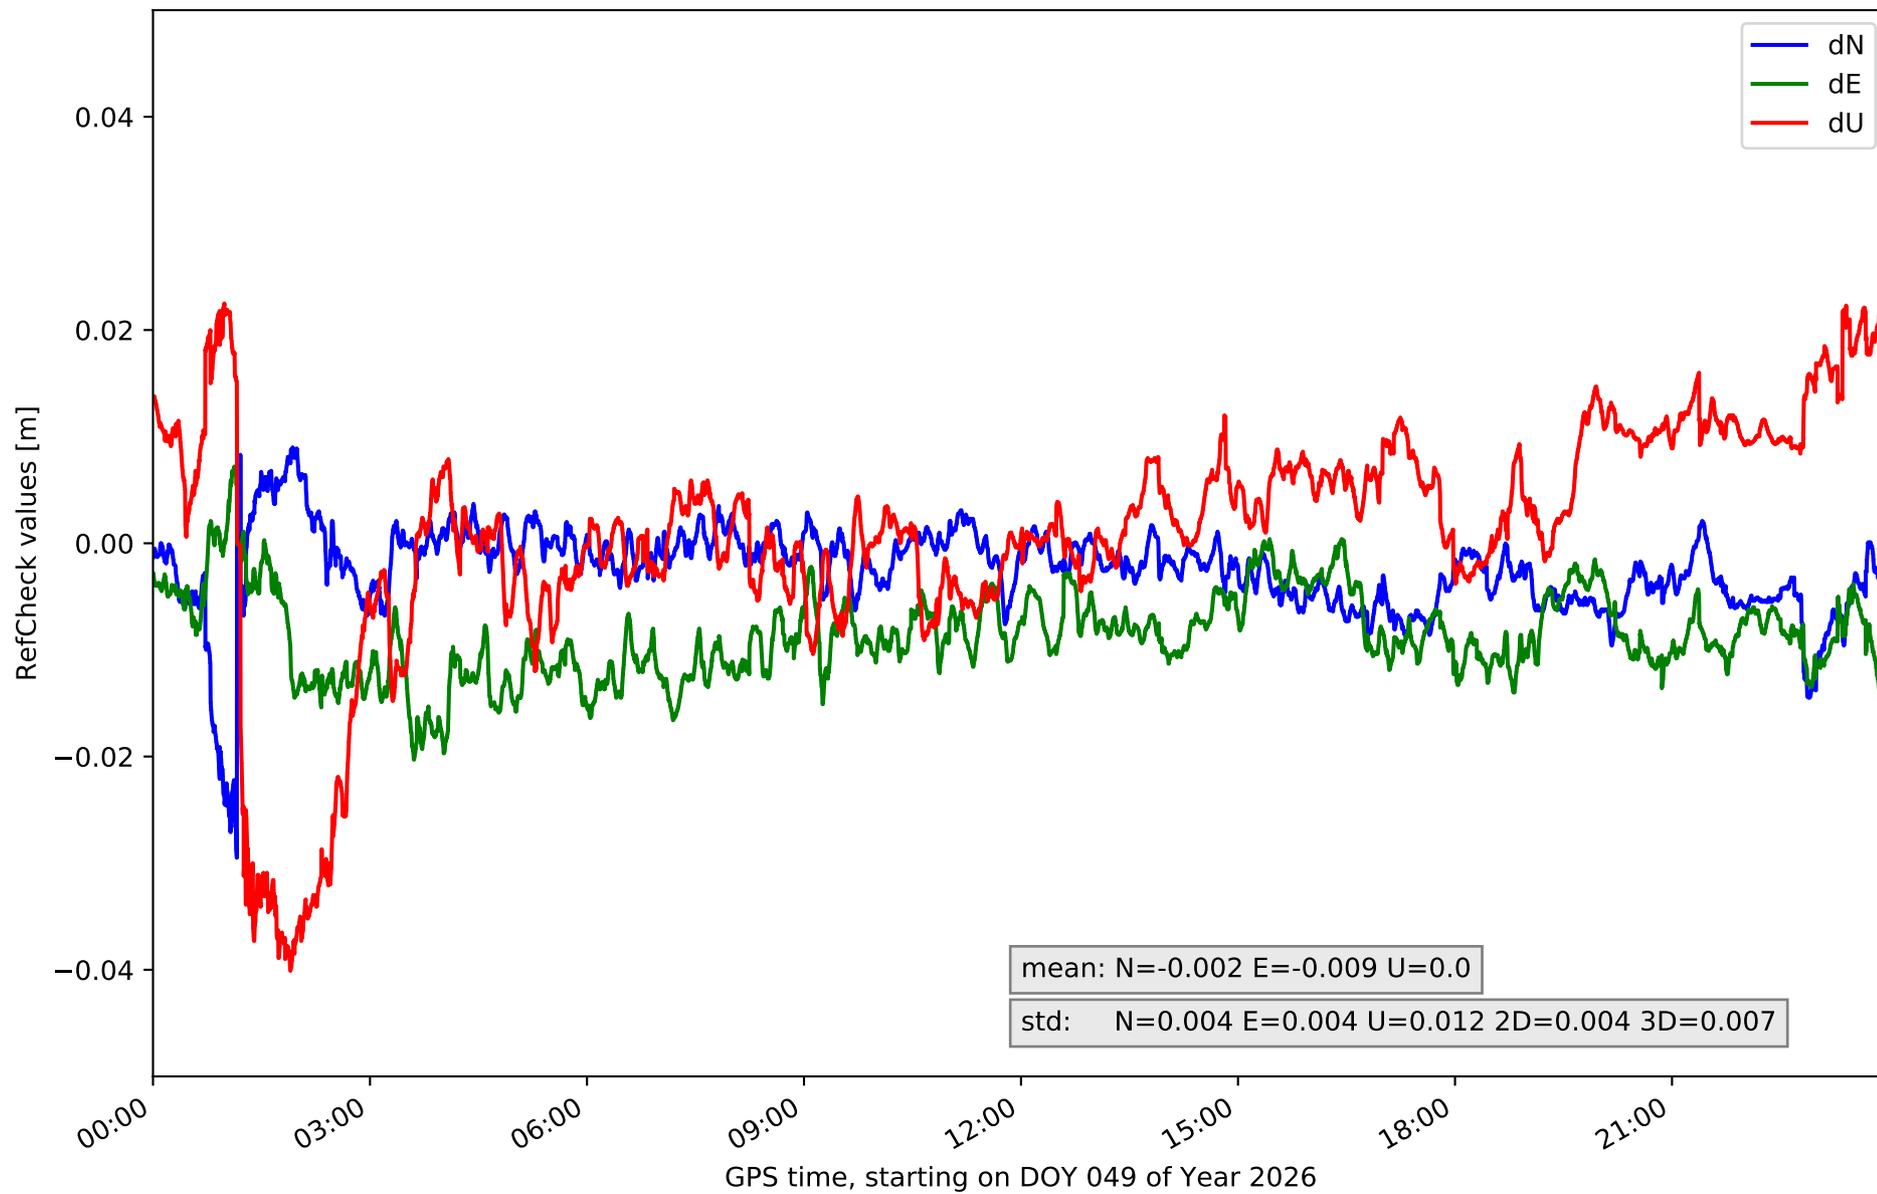


RefCheck for station TN03 in network N32T

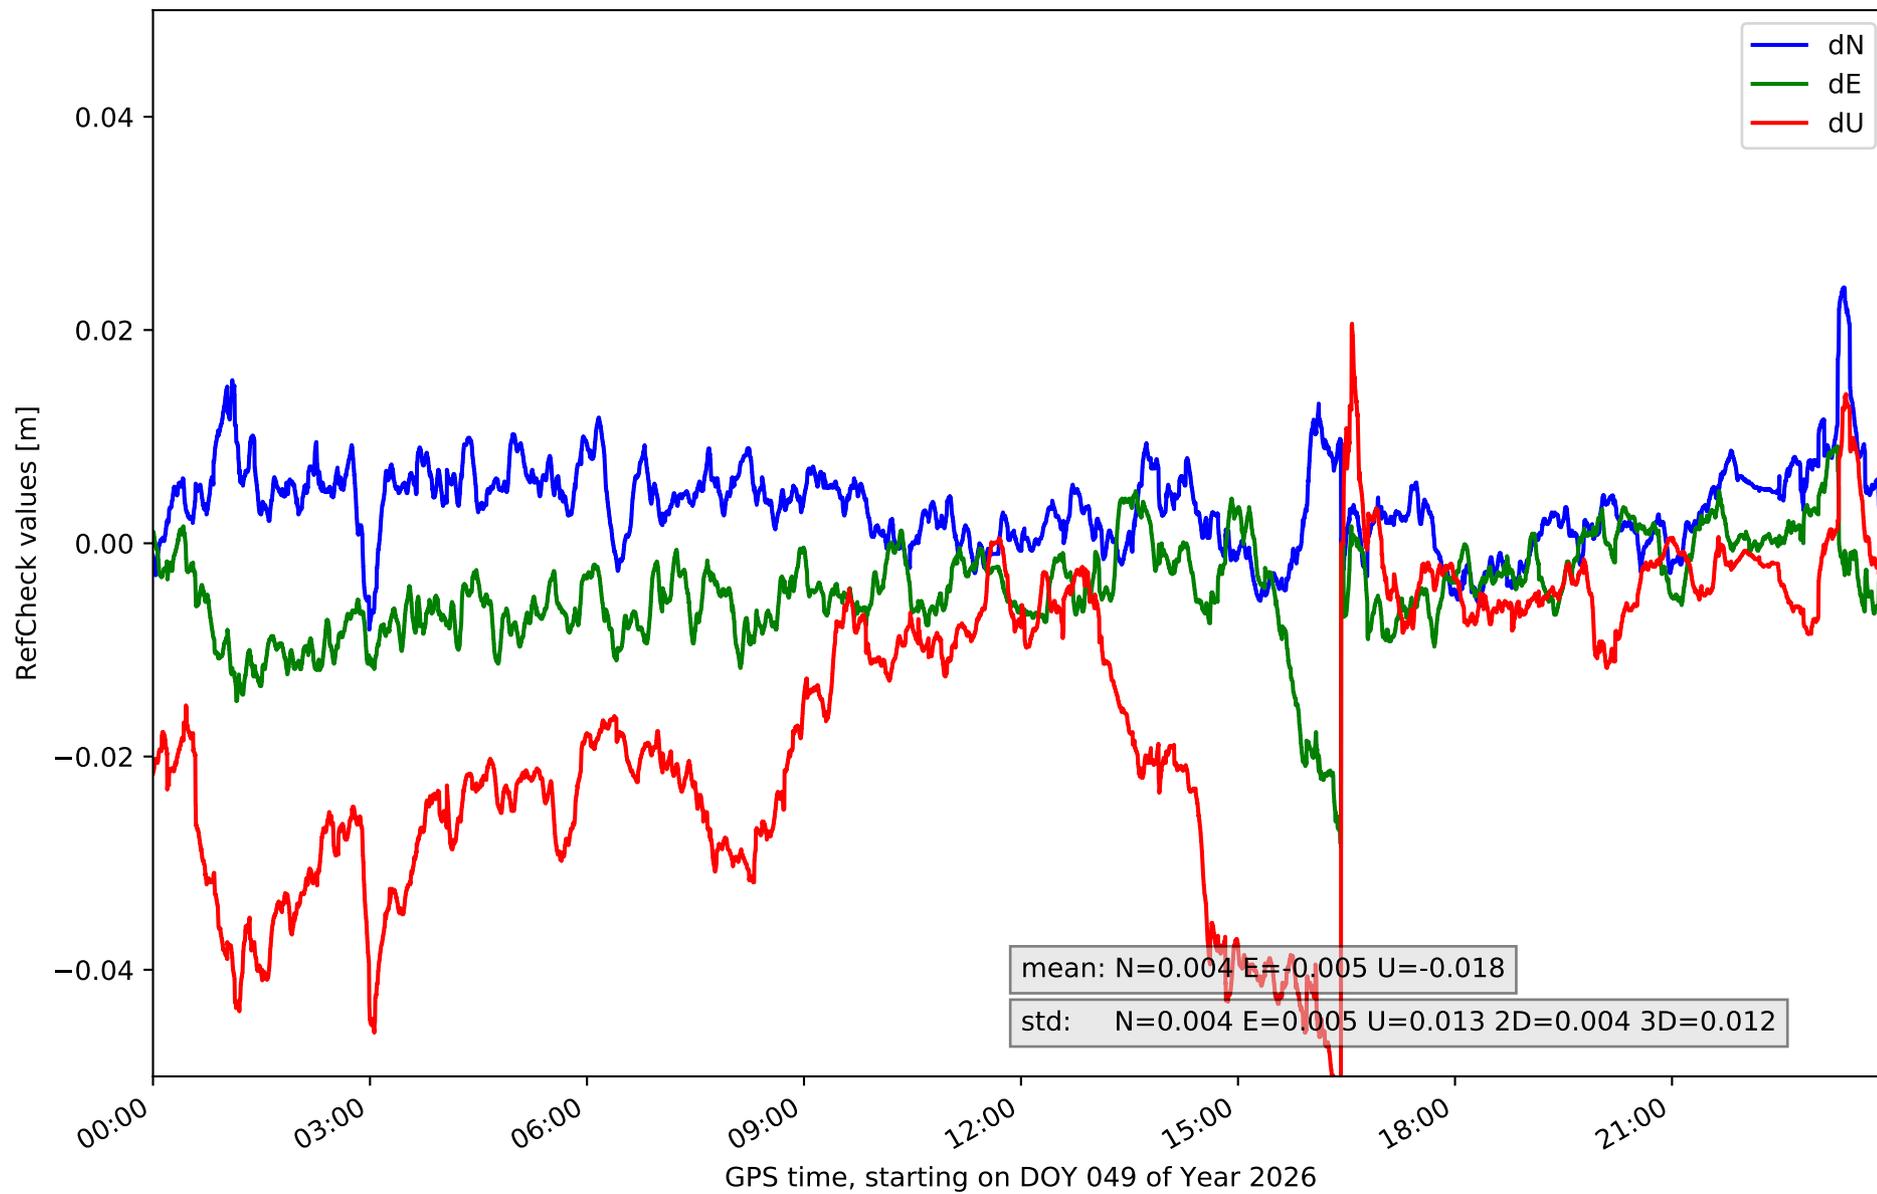


RefCheck for station TN06 in network N32T

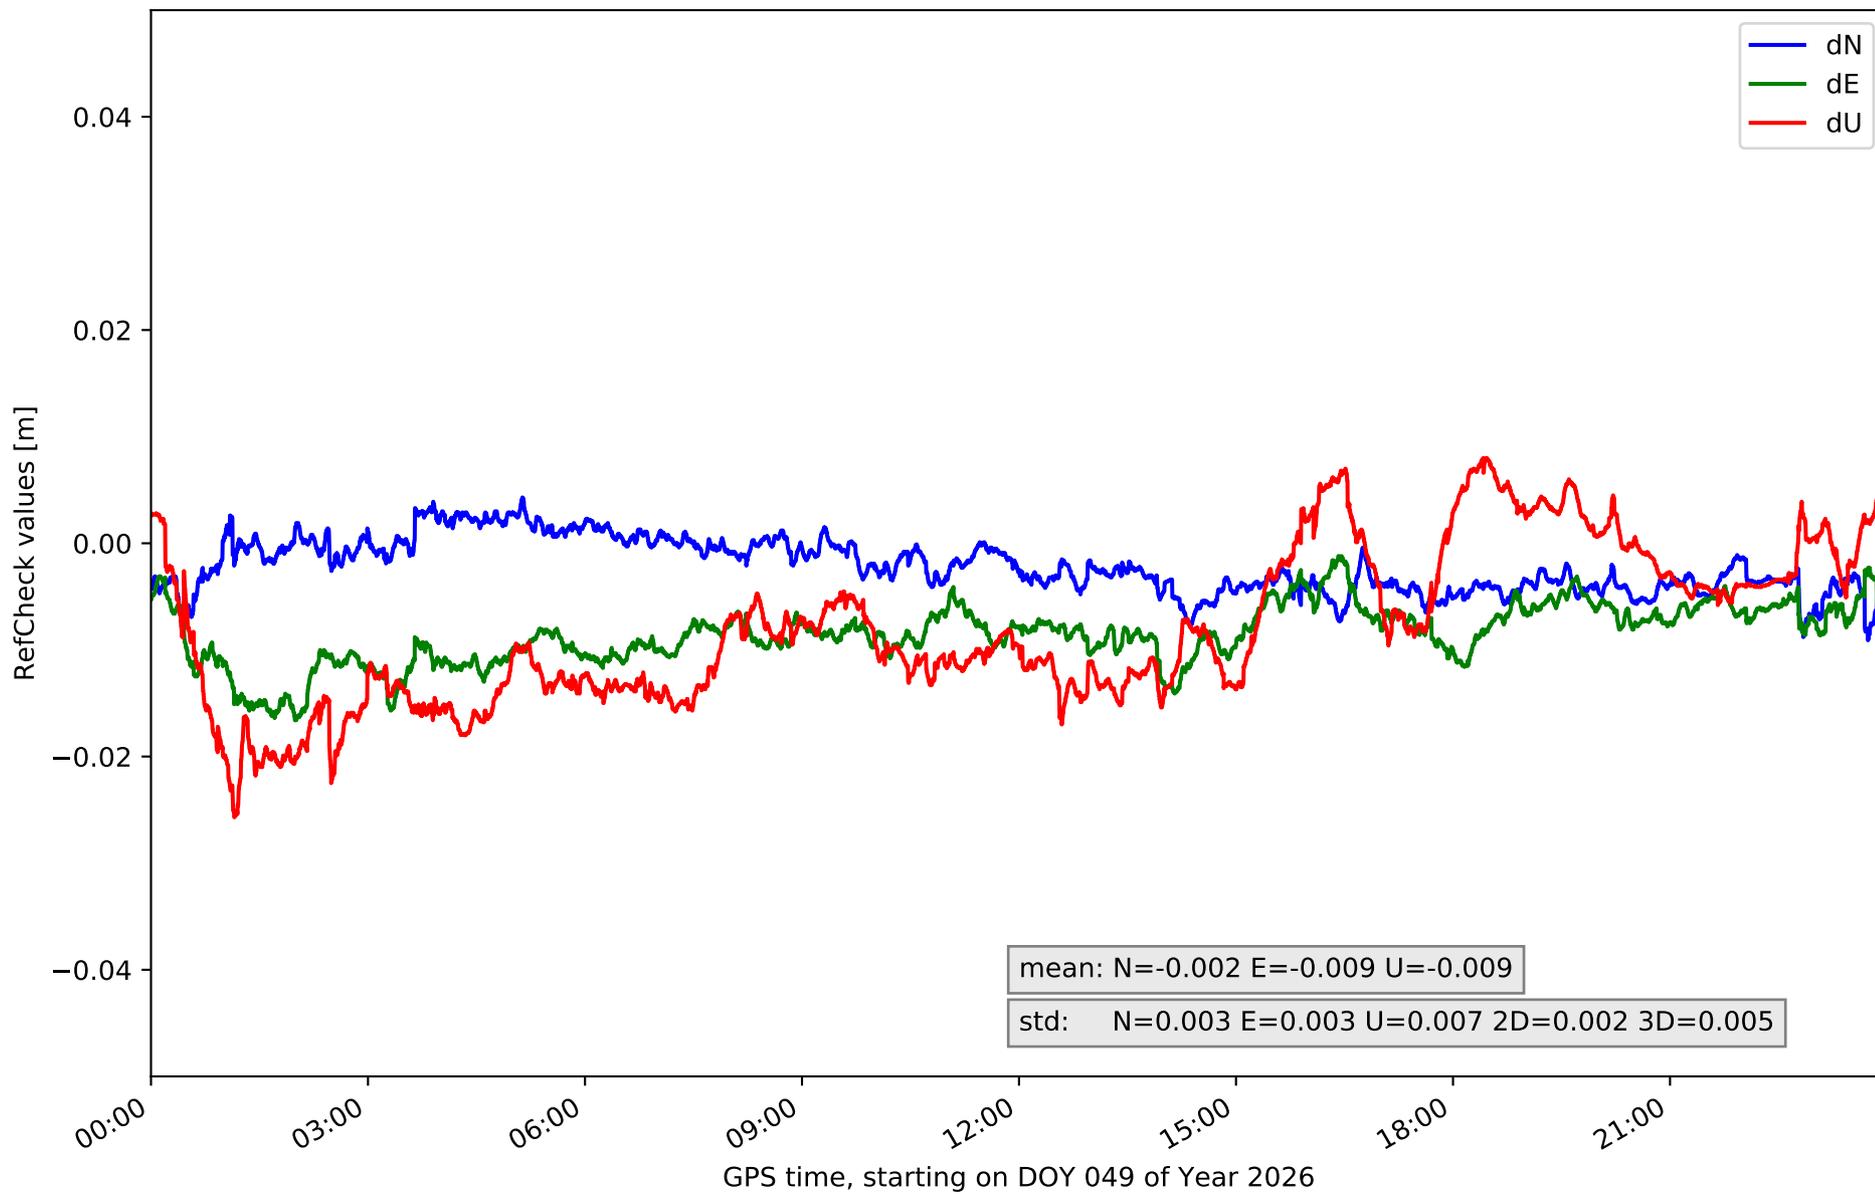

RefCheck for station TN09 in network N32T

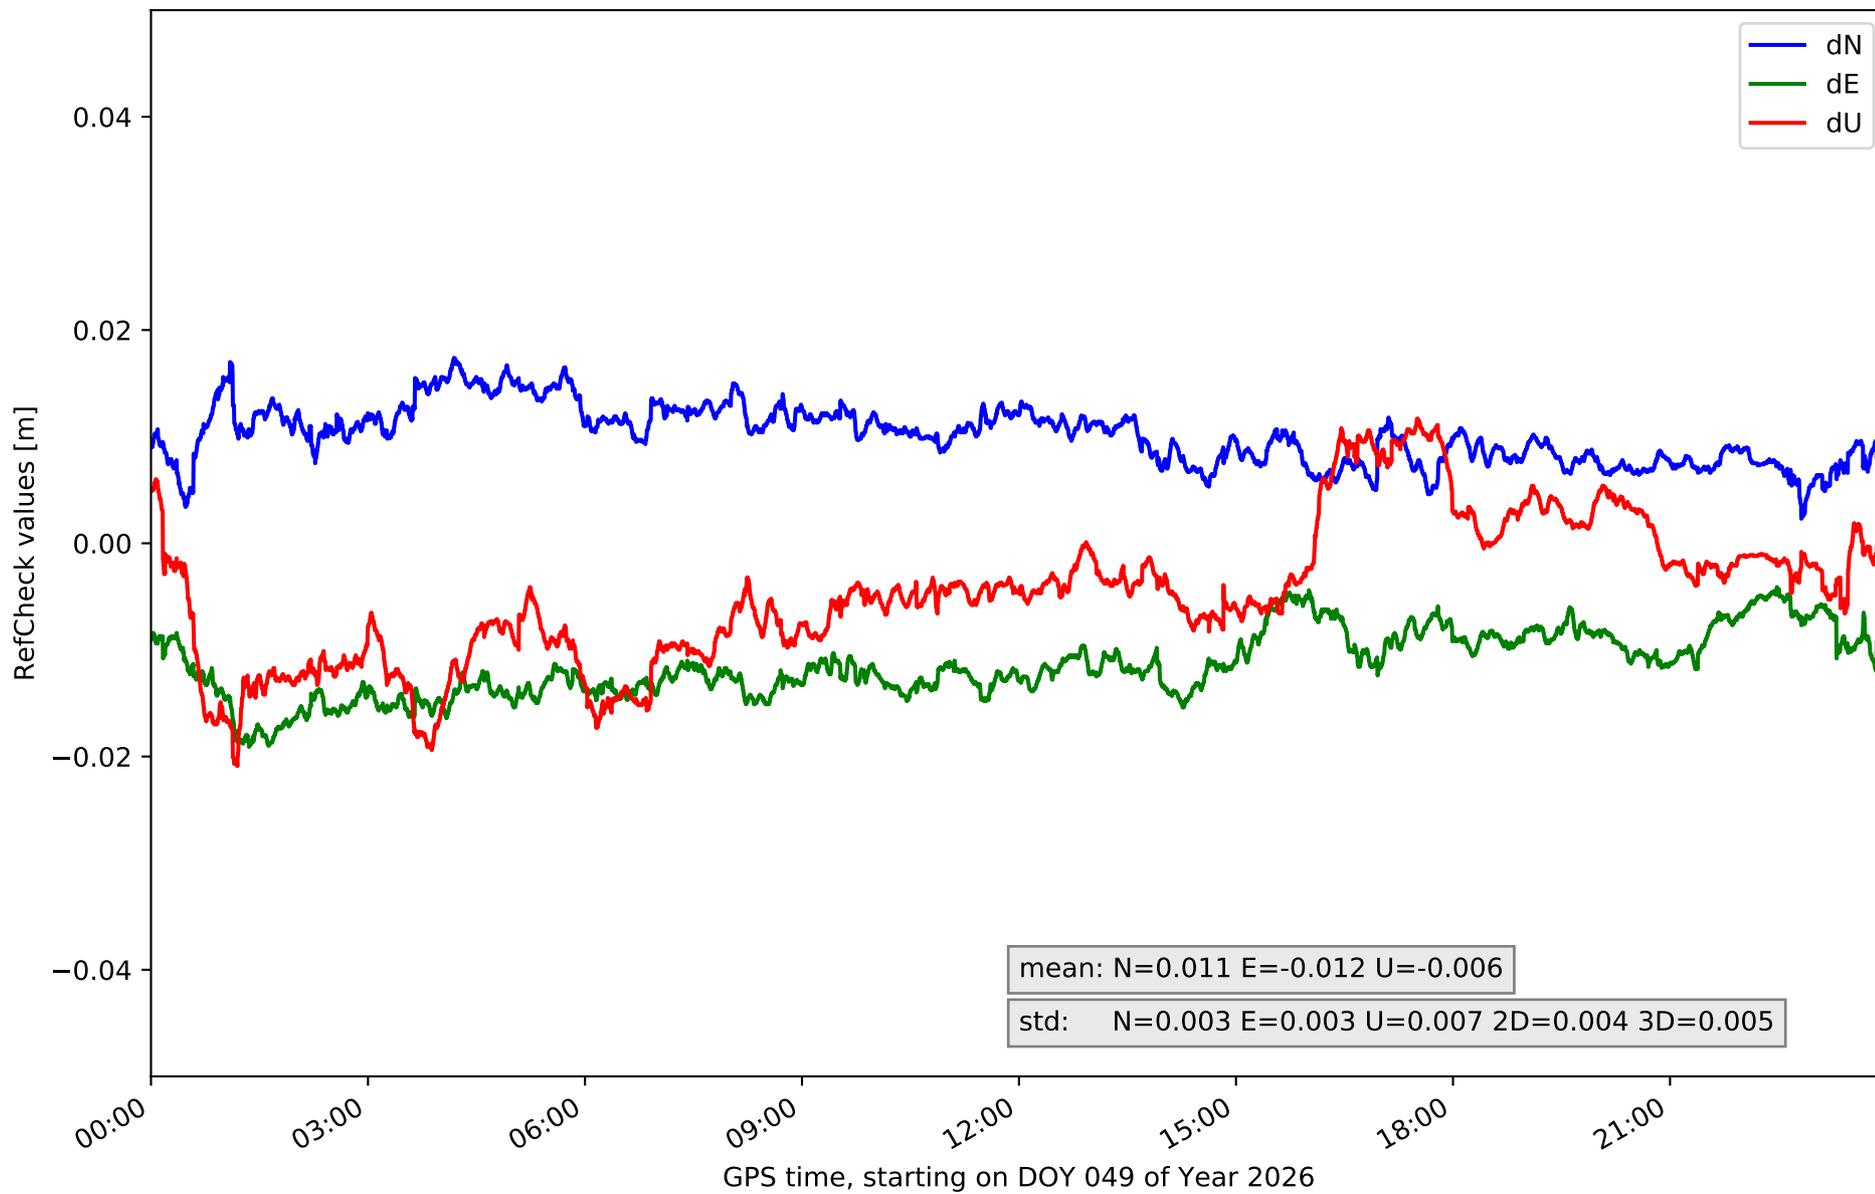

RefCheck for station TE11 in network N32T

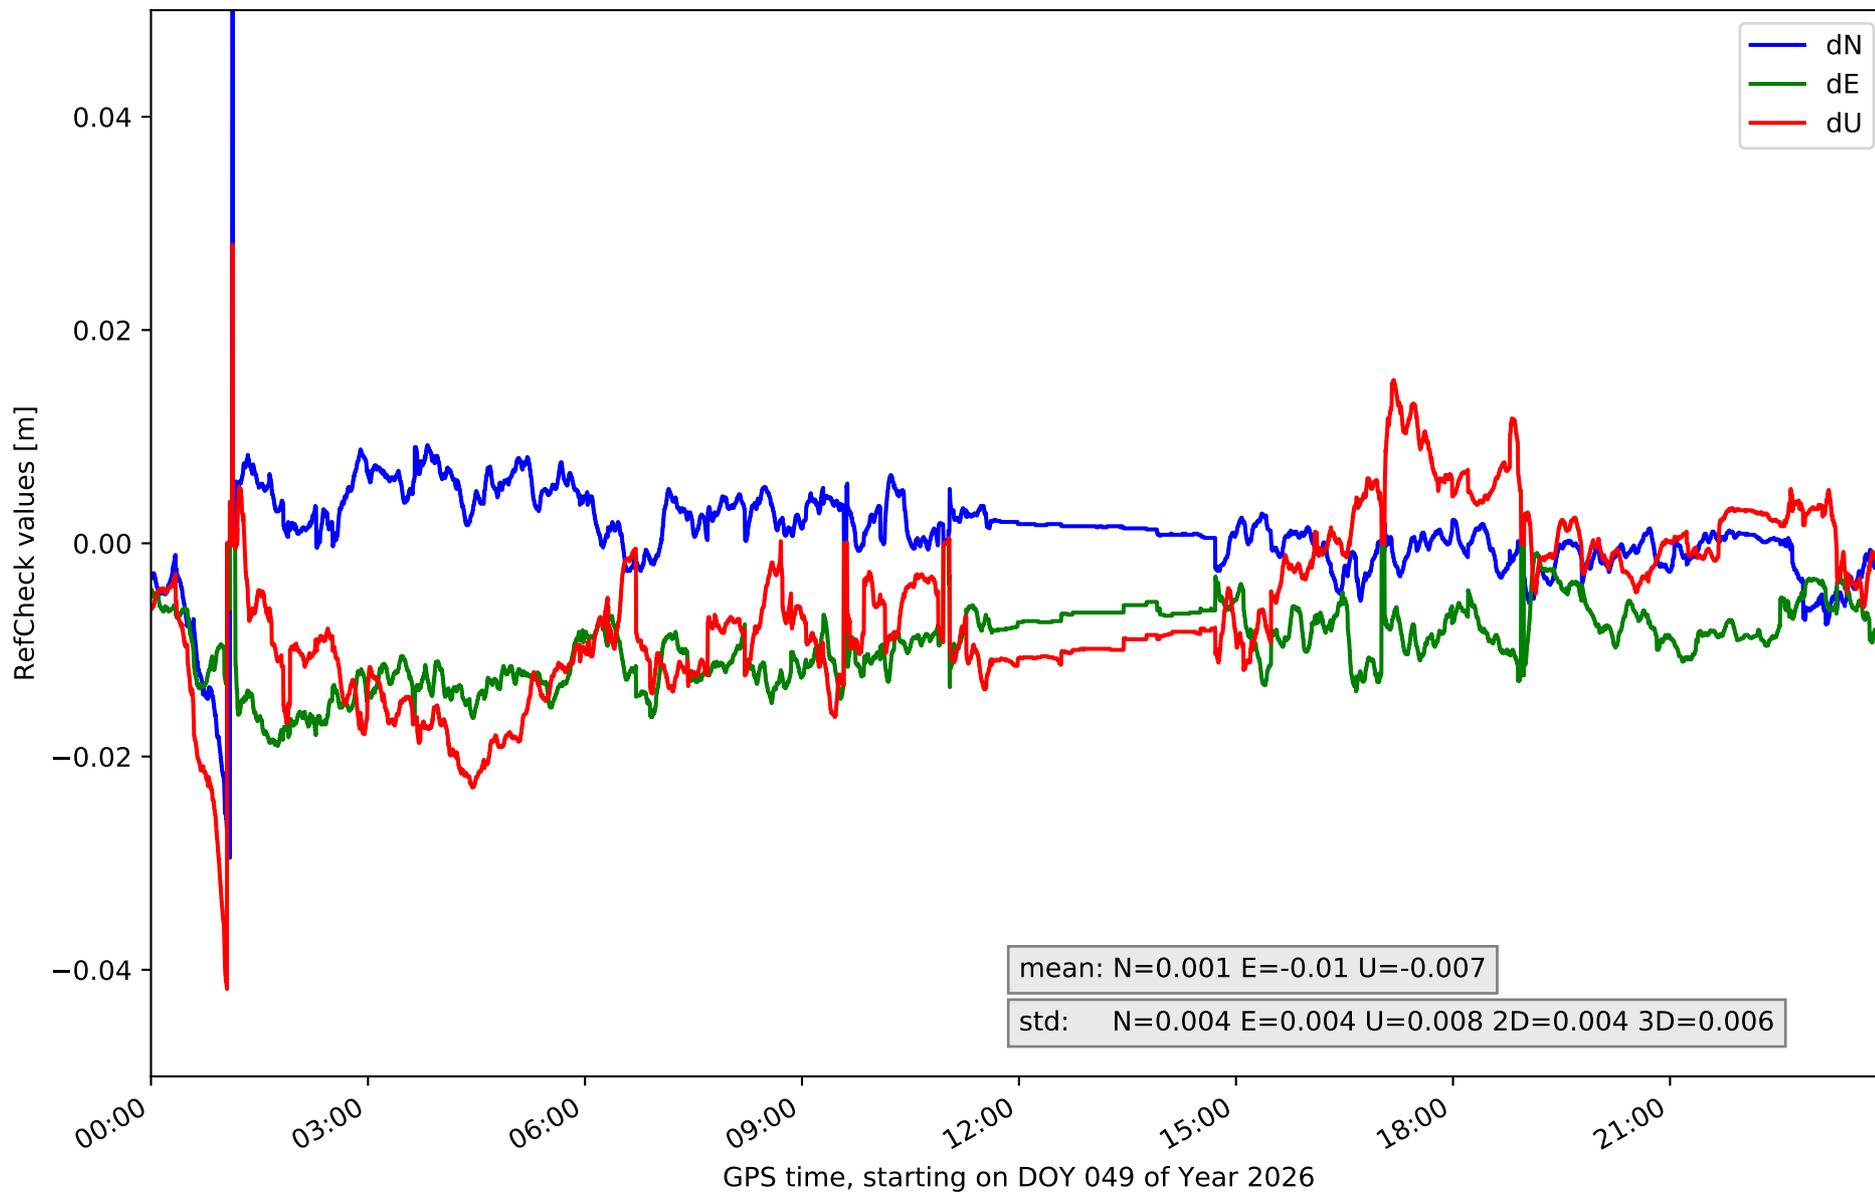

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.054	0.014	0.003	-0.034	0.029	0.004	-0.059	0.026	0.016	0.003	0.009	58730	92.1	25129	39.4
EH02	-0.012	0.022	0.005	-0.002	0.03	0.005	-0.06	0.081	0.015	0.005	0.014	56792	89.1	51120	80.2
GOM1	-0.011	0.01	0.003	-0.02	0.012	0.004	-0.029	0.06	0.011	0.003	0.007	35879	56.3	17455	27.4
GOME	-0.003	0.018	0.003	-0.015	0.007	0.004	-0.038	0.019	0.01	0.003	0.006	5248	8.2	4910	7.7
IZAN	-0.006	0.01	0.003	-0.021	-0.005	0.003	-0.027	0.011	0.008	0.003	0.006	44528	69.8	25287	39.7
LP01	-0.02	-0.004	0.003	-0.004	0.014	0.004	-0.024	0.032	0.012	0.004	0.007	38108	59.8	16019	25.1
LP03	-0.011	0.014	0.004	-0.013	0.014	0.004	-0.06	0.02	0.014	0.003	0.009	4178	6.6	18411	28.9
LPAL	-0.017	-0.001	0.004	-0.001	0.02	0.004	-0.034	0.019	0.011	0.005	0.005	45714	71.7	24633	38.6
LRES	0.0	0.025	0.004	-0.013	0.024	0.006	-0.061	0.003	0.011	0.005	0.009	52420	82.2	48405	75.9
TN01	-0.01	0.007	0.003	-0.024	-0.006	0.003	-0.027	-0.0	0.006	0.003	0.005	61198	96.0	38295	60.1
TN02	-0.029	0.009	0.004	-0.02	0.007	0.004	-0.04	0.023	0.012	0.004	0.007	33250	52.2	8984	14.1
TN03	-0.008	0.024	0.004	-0.029	0.009	0.005	-0.053	0.021	0.013	0.004	0.012	14766	23.2	34225	53.7
TN06	-0.009	0.004	0.003	-0.017	-0.001	0.003	-0.026	0.008	0.007	0.002	0.005	23787	37.3	7146	11.2
TN09	0.002	0.017	0.003	-0.019	-0.004	0.003	-0.021	0.012	0.007	0.004	0.005	59025	92.6	23159	36.3
TE11	-0.029	0.056	0.004	-0.019	0.007	0.004	-0.042	0.028	0.008	0.004	0.006	32892	51.6	11489	18.0
Mean	-0.014	0.015	0.004	-0.017	0.01	0.004	-0.04	0.024	0.011	0.004	0.007	37767.7	59.2	23644.5	37.1
Min/Max	-0.054	0.056	0.005	-0.034	0.03	0.006	-0.061	0.081	0.016	0.005	0.014	61198	96.0	51120	80.2

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	88.8	88.9	89.2	90.6	88.4
considering satellites with dual-frequency fixed	85.6	85.8	84.8	85.5	86.0
considering all signals separately	85.2	85.6	84.8	85.1	84.9