

## summary for network N31T

timeperiod chosen: from 2026-02-21-00:00:00 until 2026-02-21-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.0 seconds


average fixing percentage with threshold set to 0.3: 82.9 percent

stations available: 7 of 7


station information:

station FUER:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 76.887
station LALA:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 62.306
station LZ01:	antenna: TRM159900.00	NONE	receiver: TRIMBLE NETR9	height: 52.693
station LZ02:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 58.039
station LZ03:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 314.762
station MASP:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 198.846
station ULP2:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE ALLOY	height: 375.129


Processing rate in network N31T

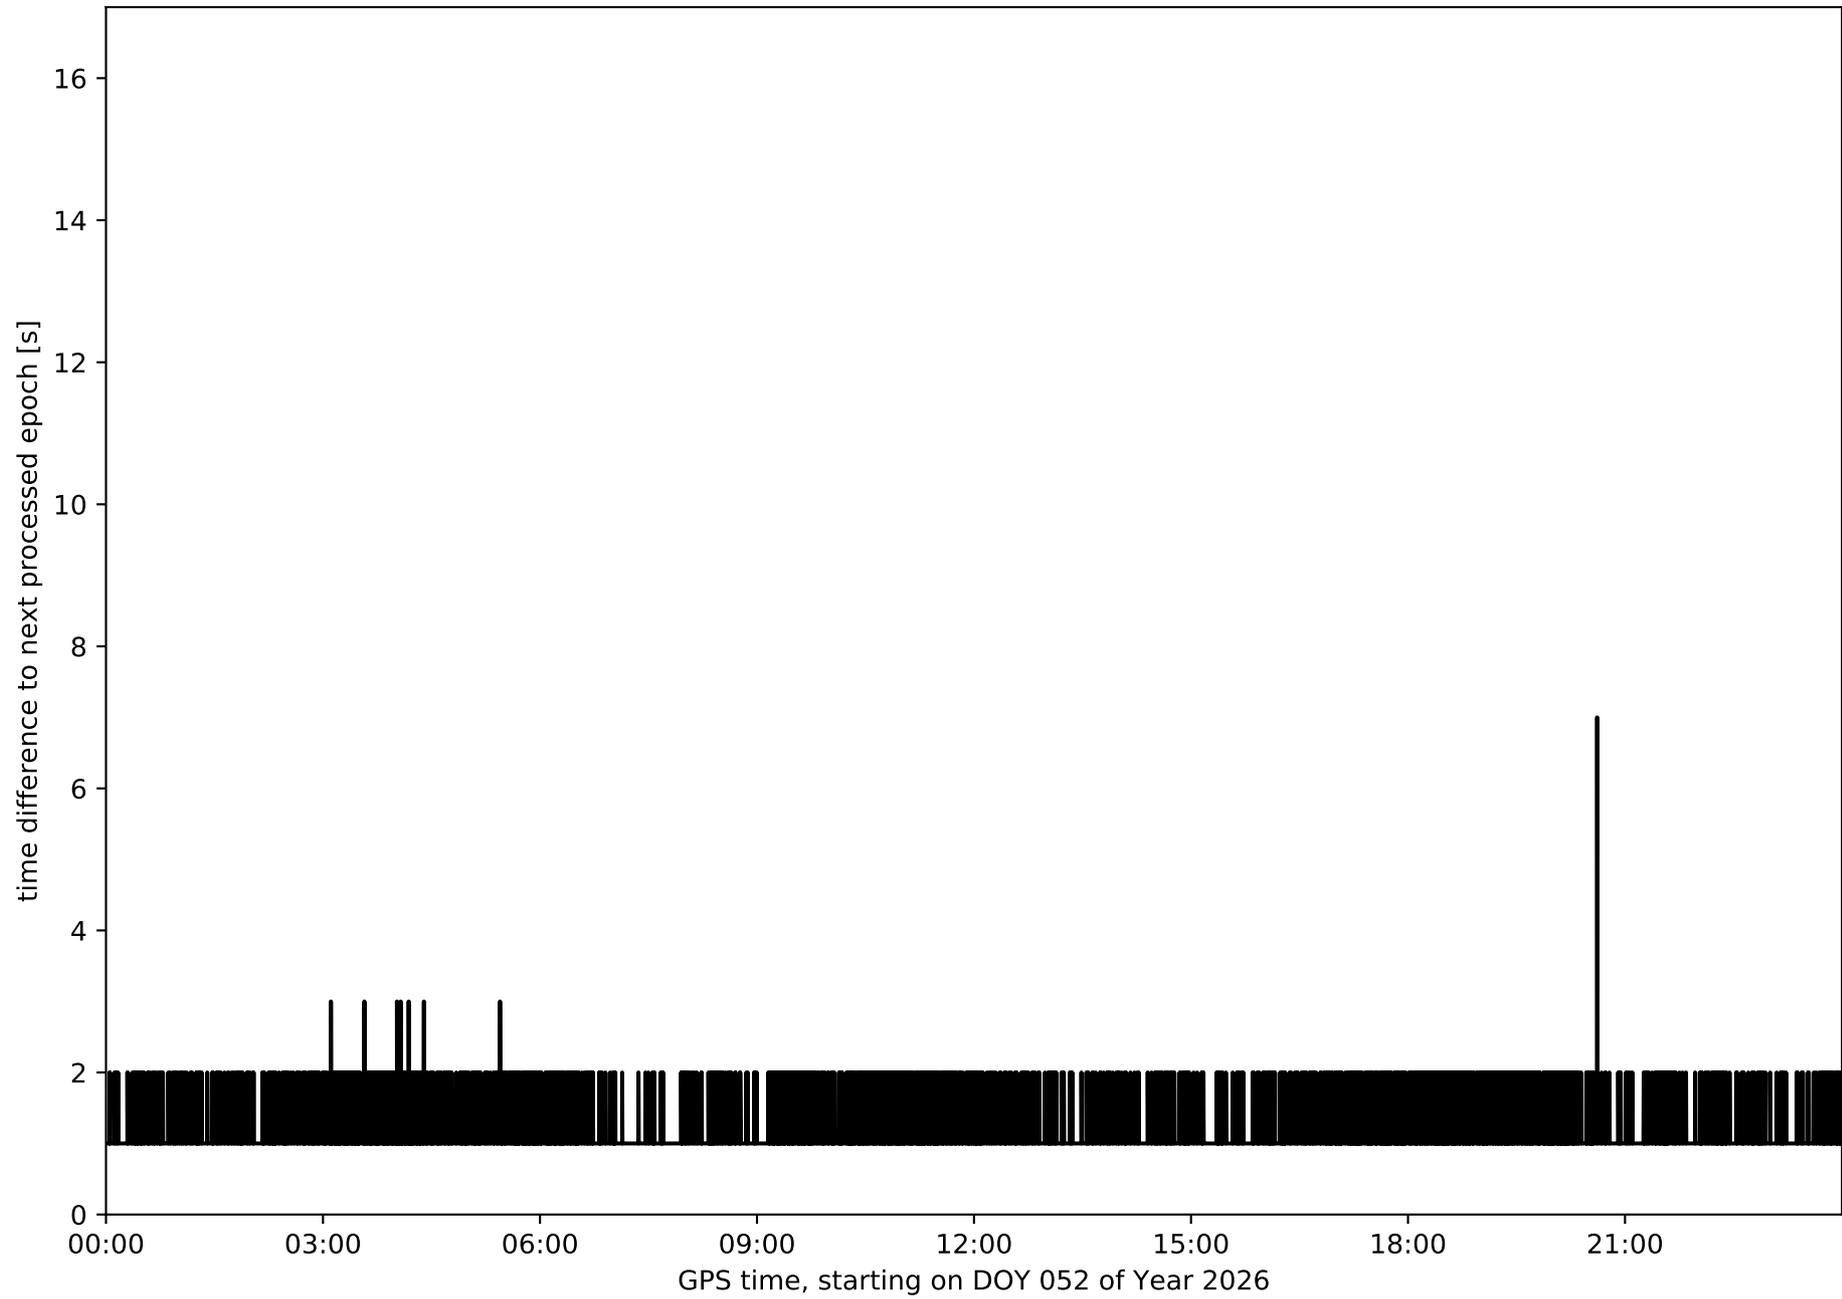


Histogram of the processing rate in network N31T (durations larger 15 seconds neglected)

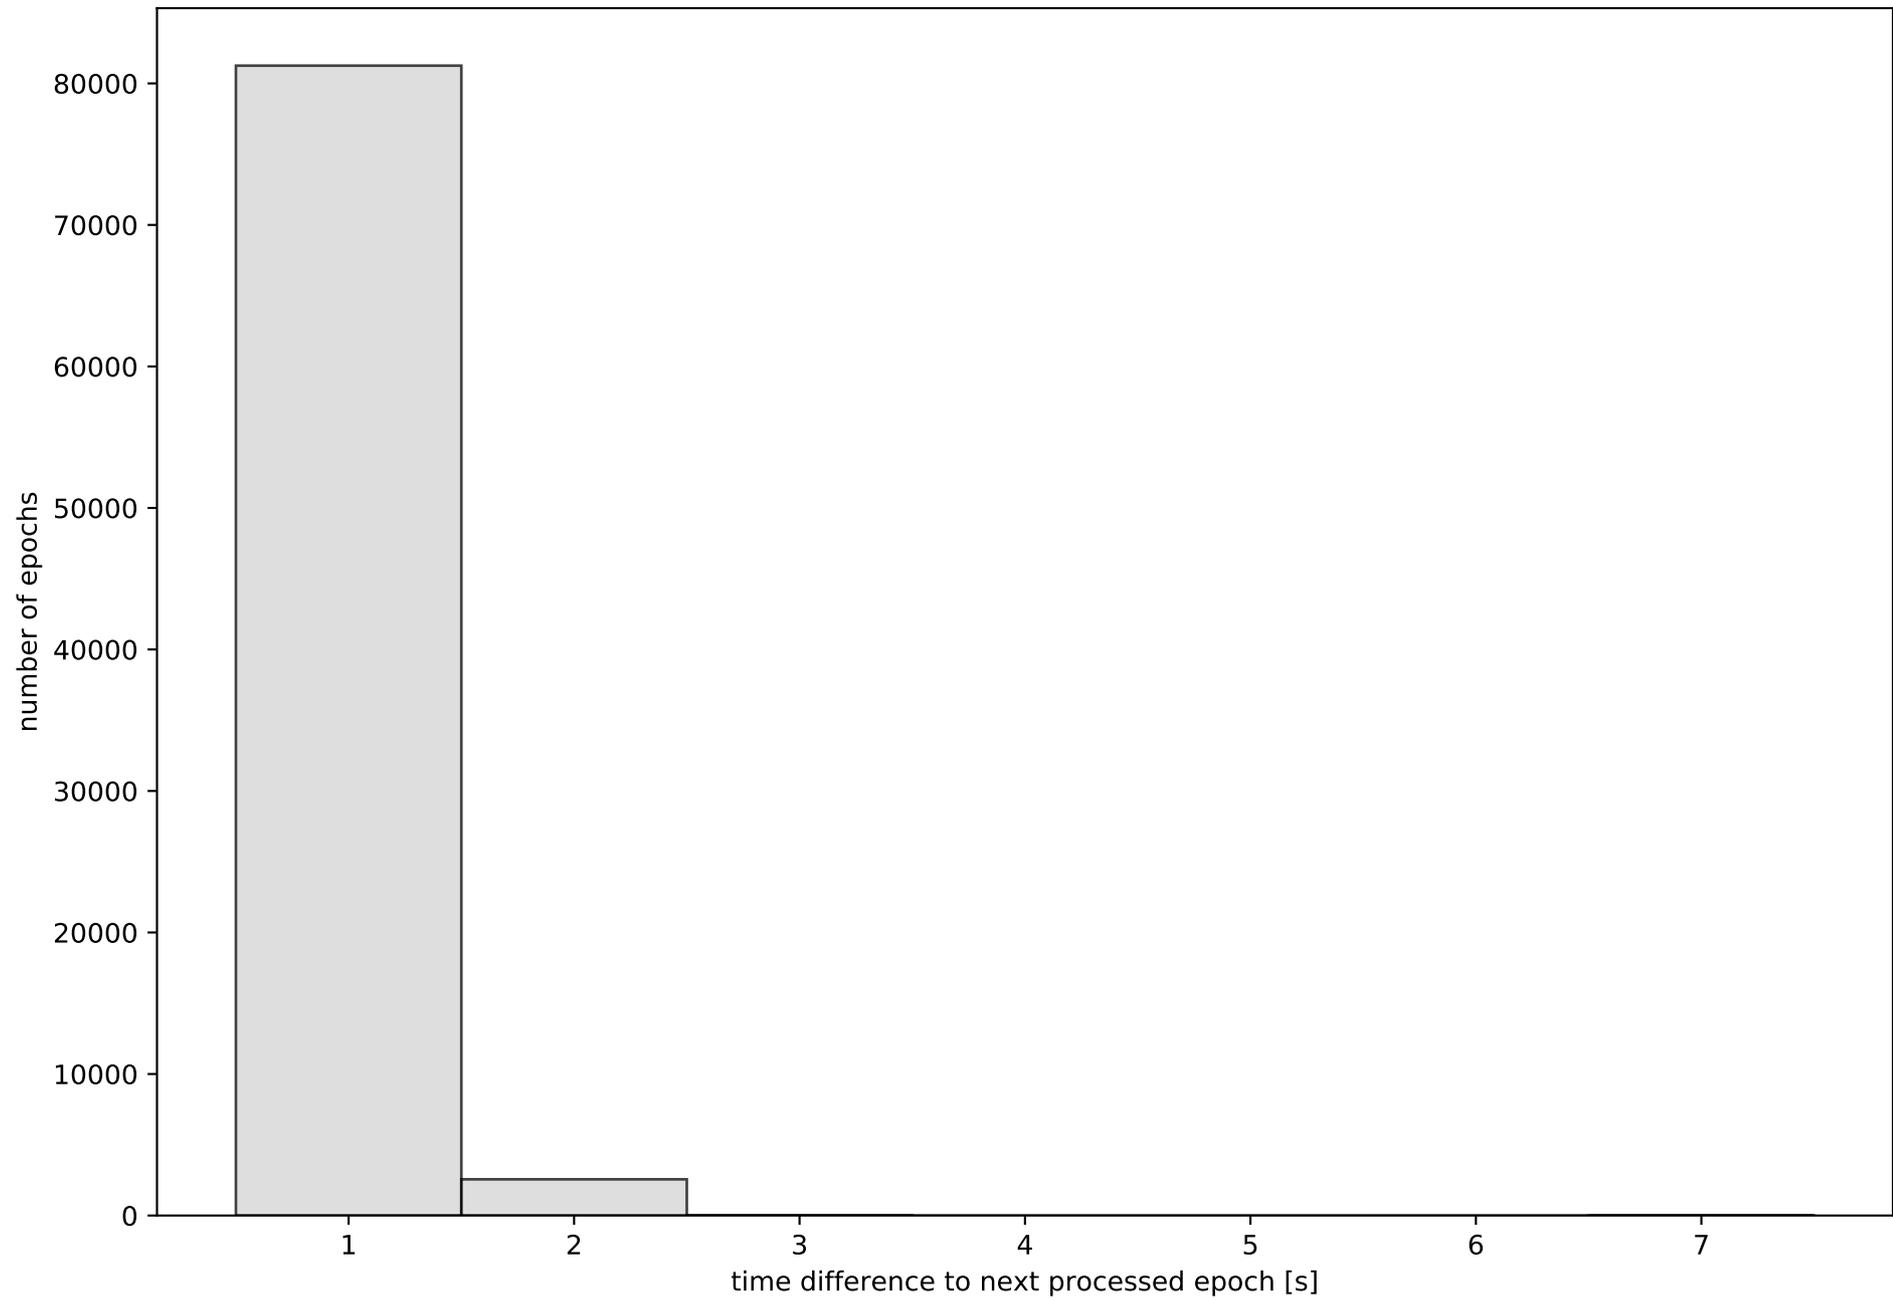


Network N31T with threshold set to 0.3

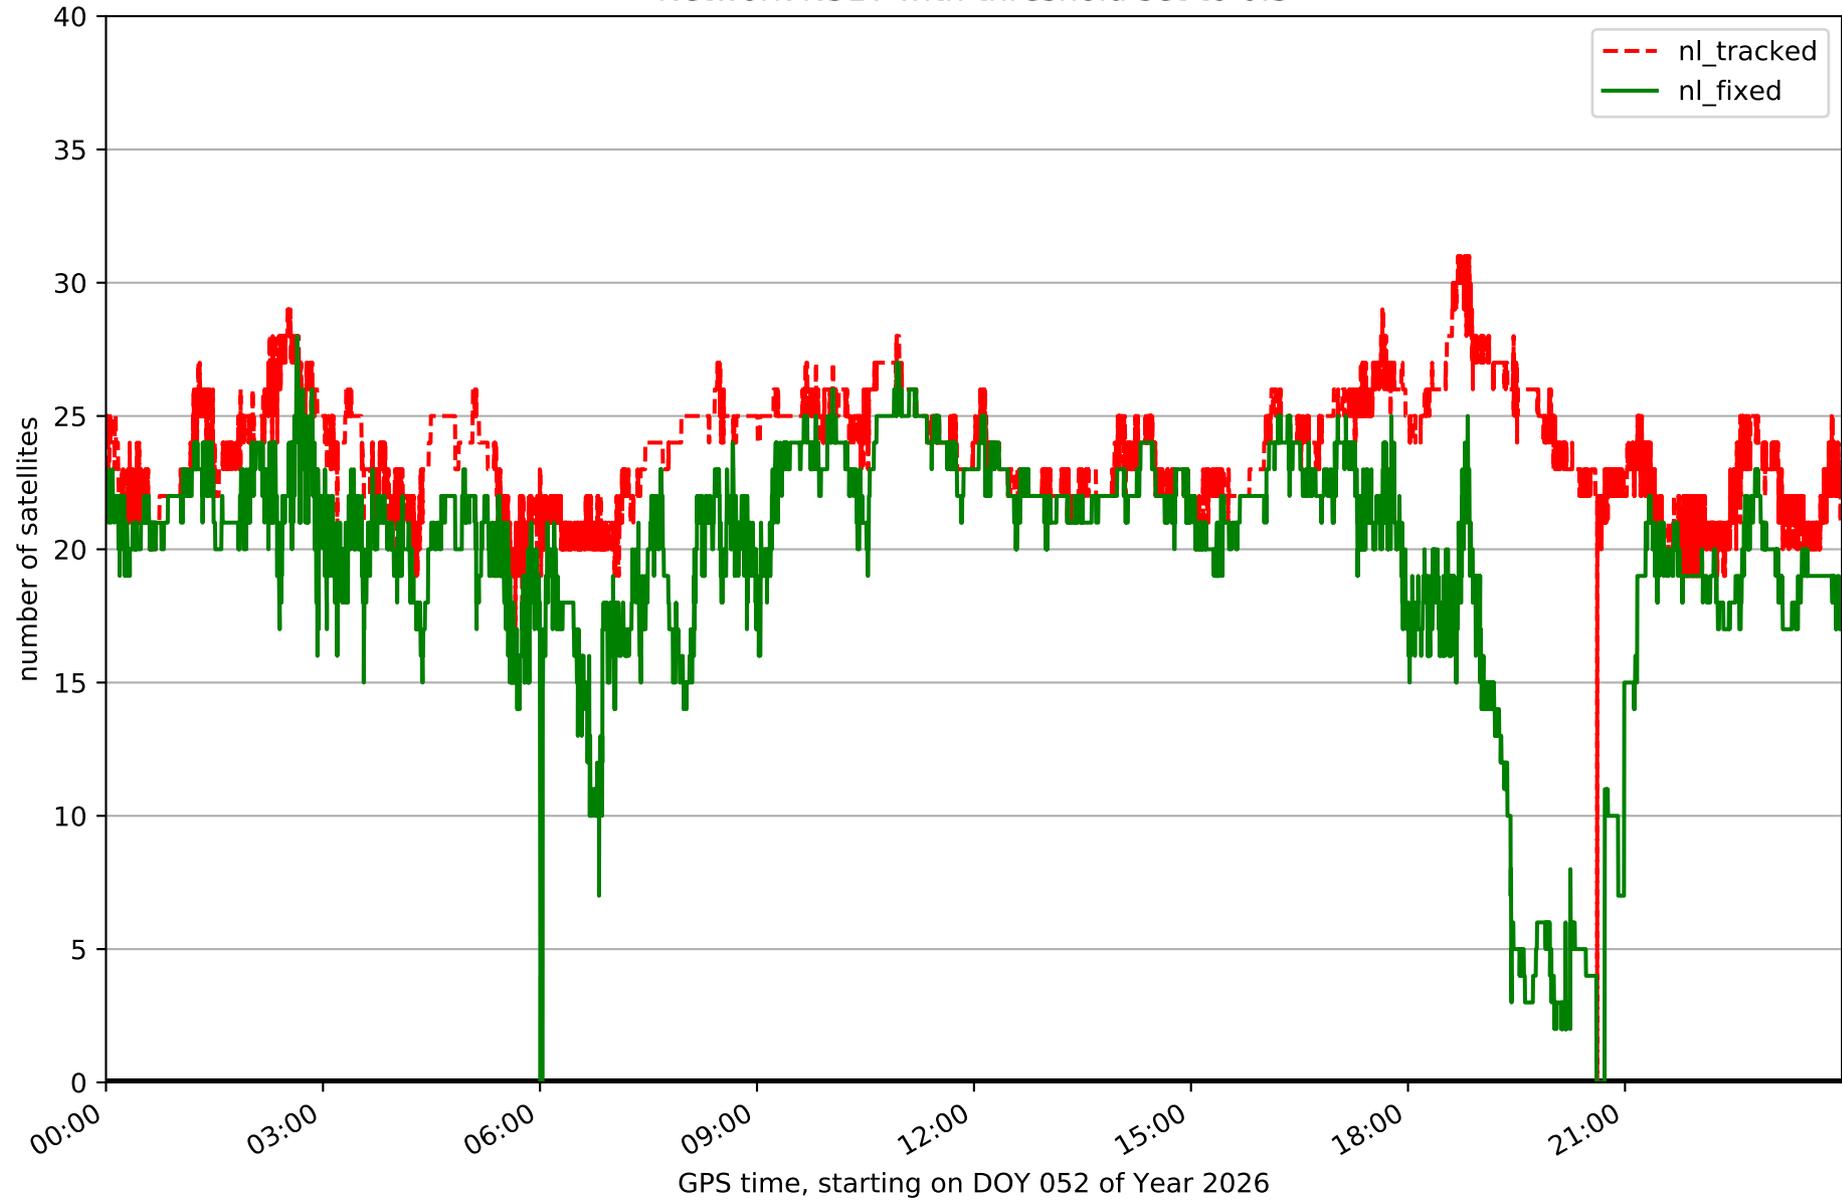


Fixing percentage of satellites in network N31T with threshold set to 0.3

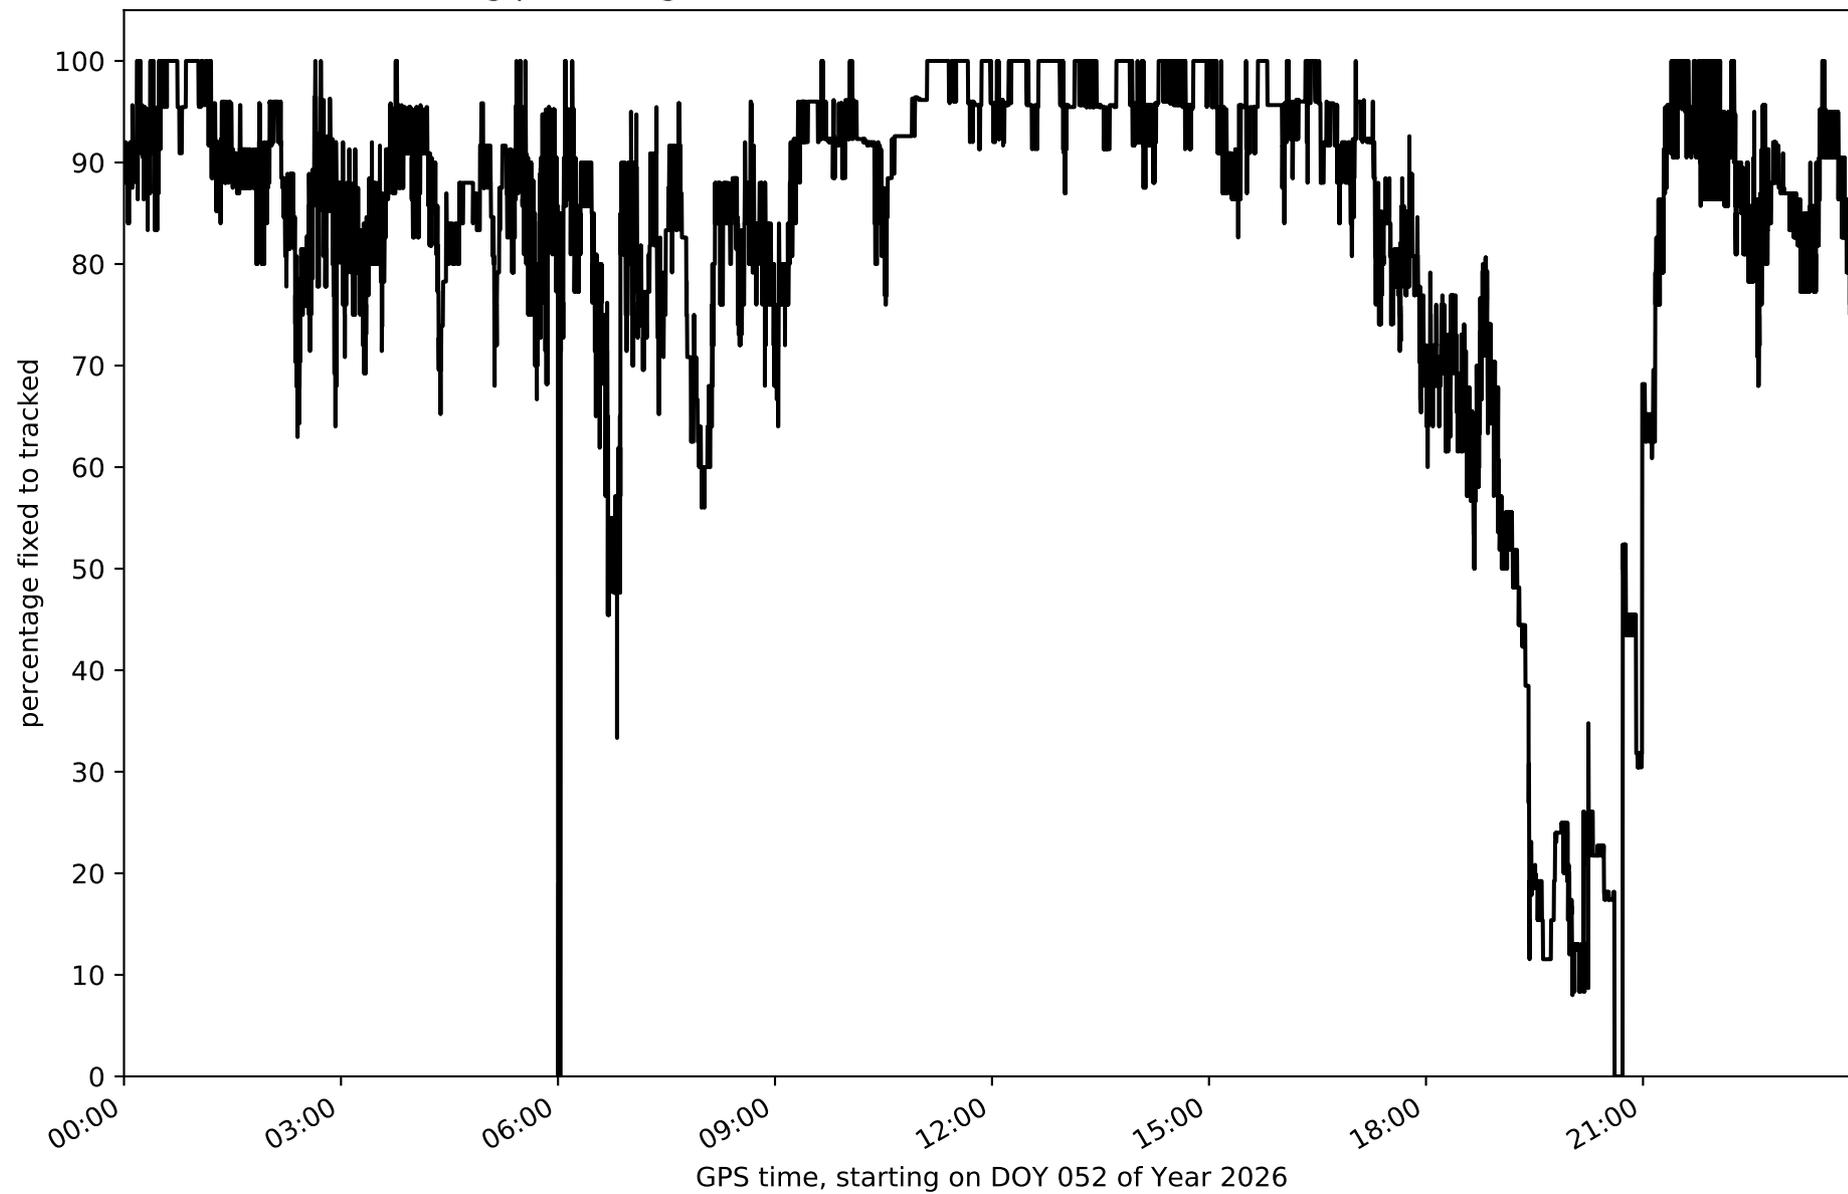


Network N31T - only GPS with threshold set to 0.3

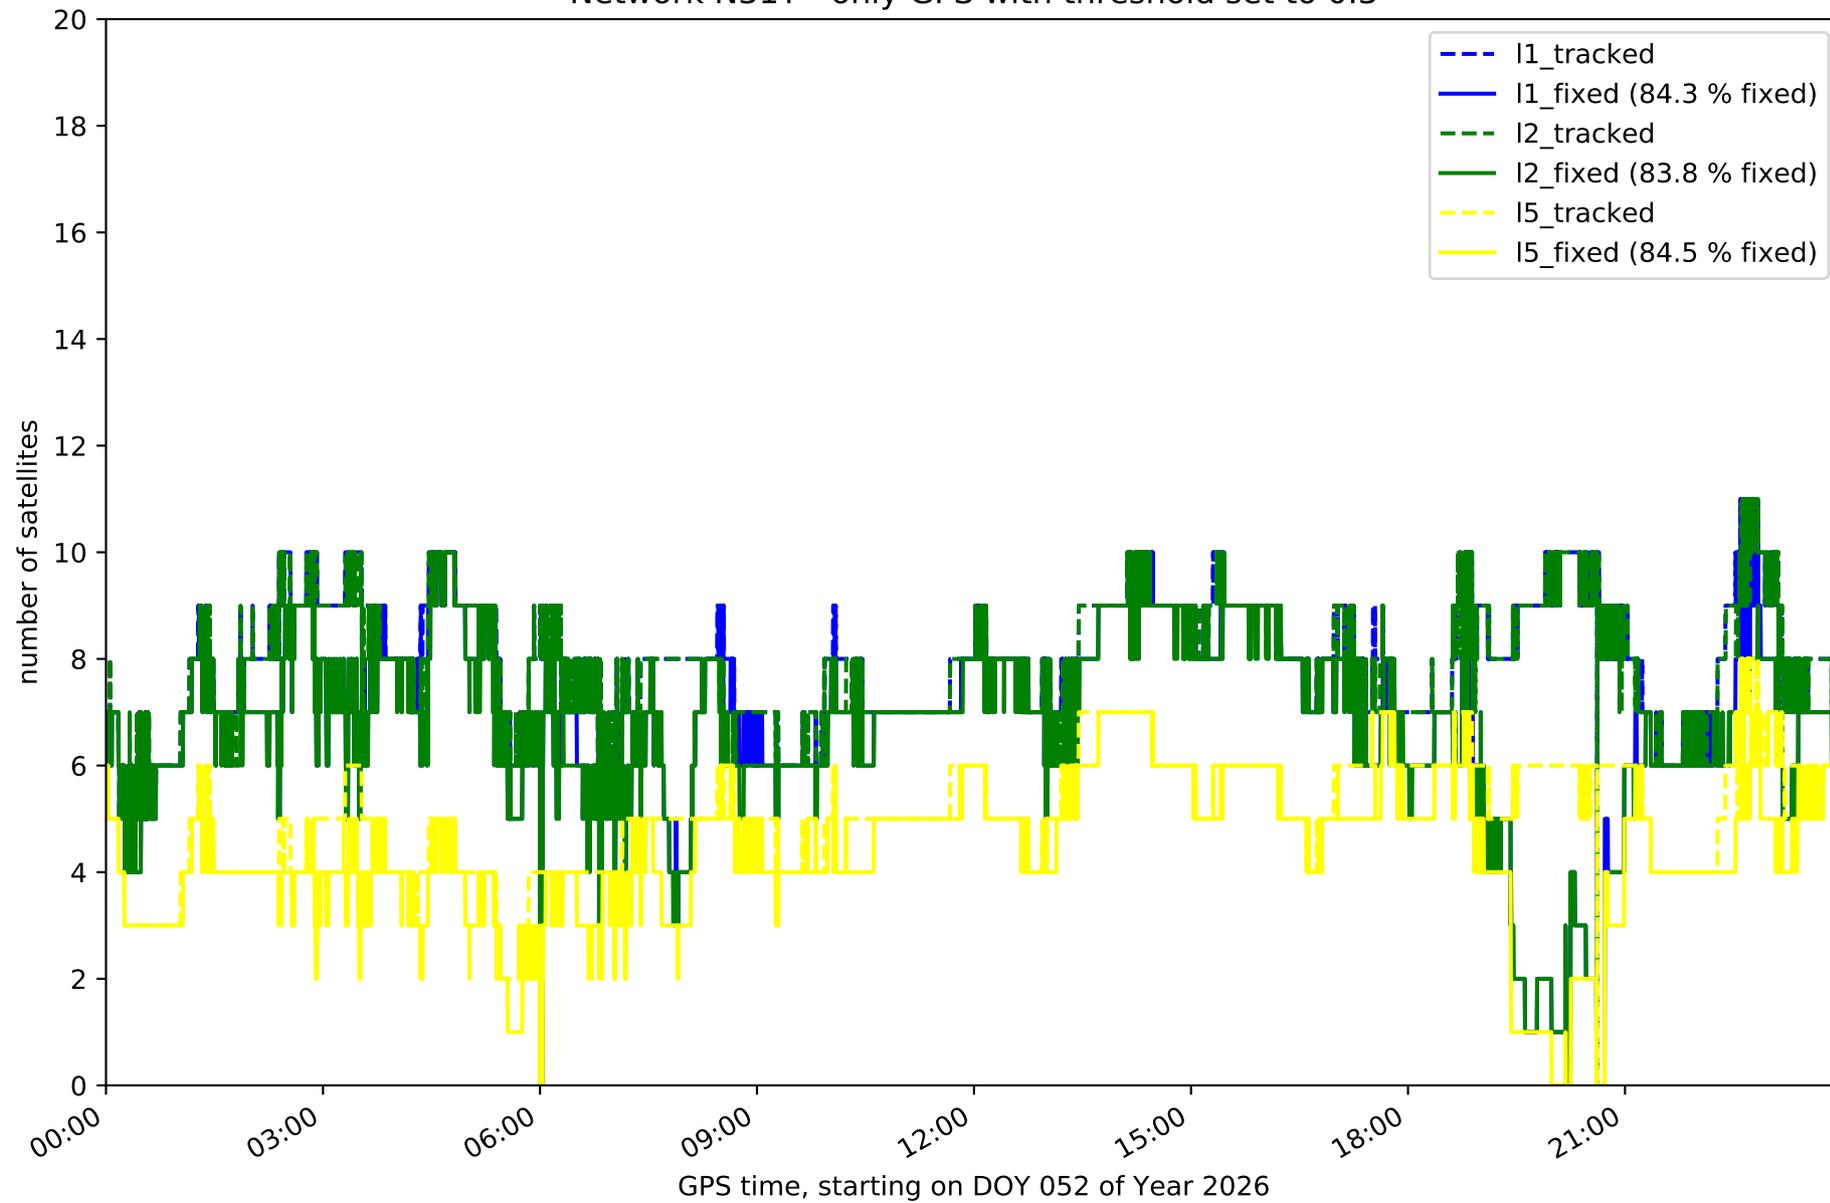


Network N31T - only GLONASS with threshold set to 0.3

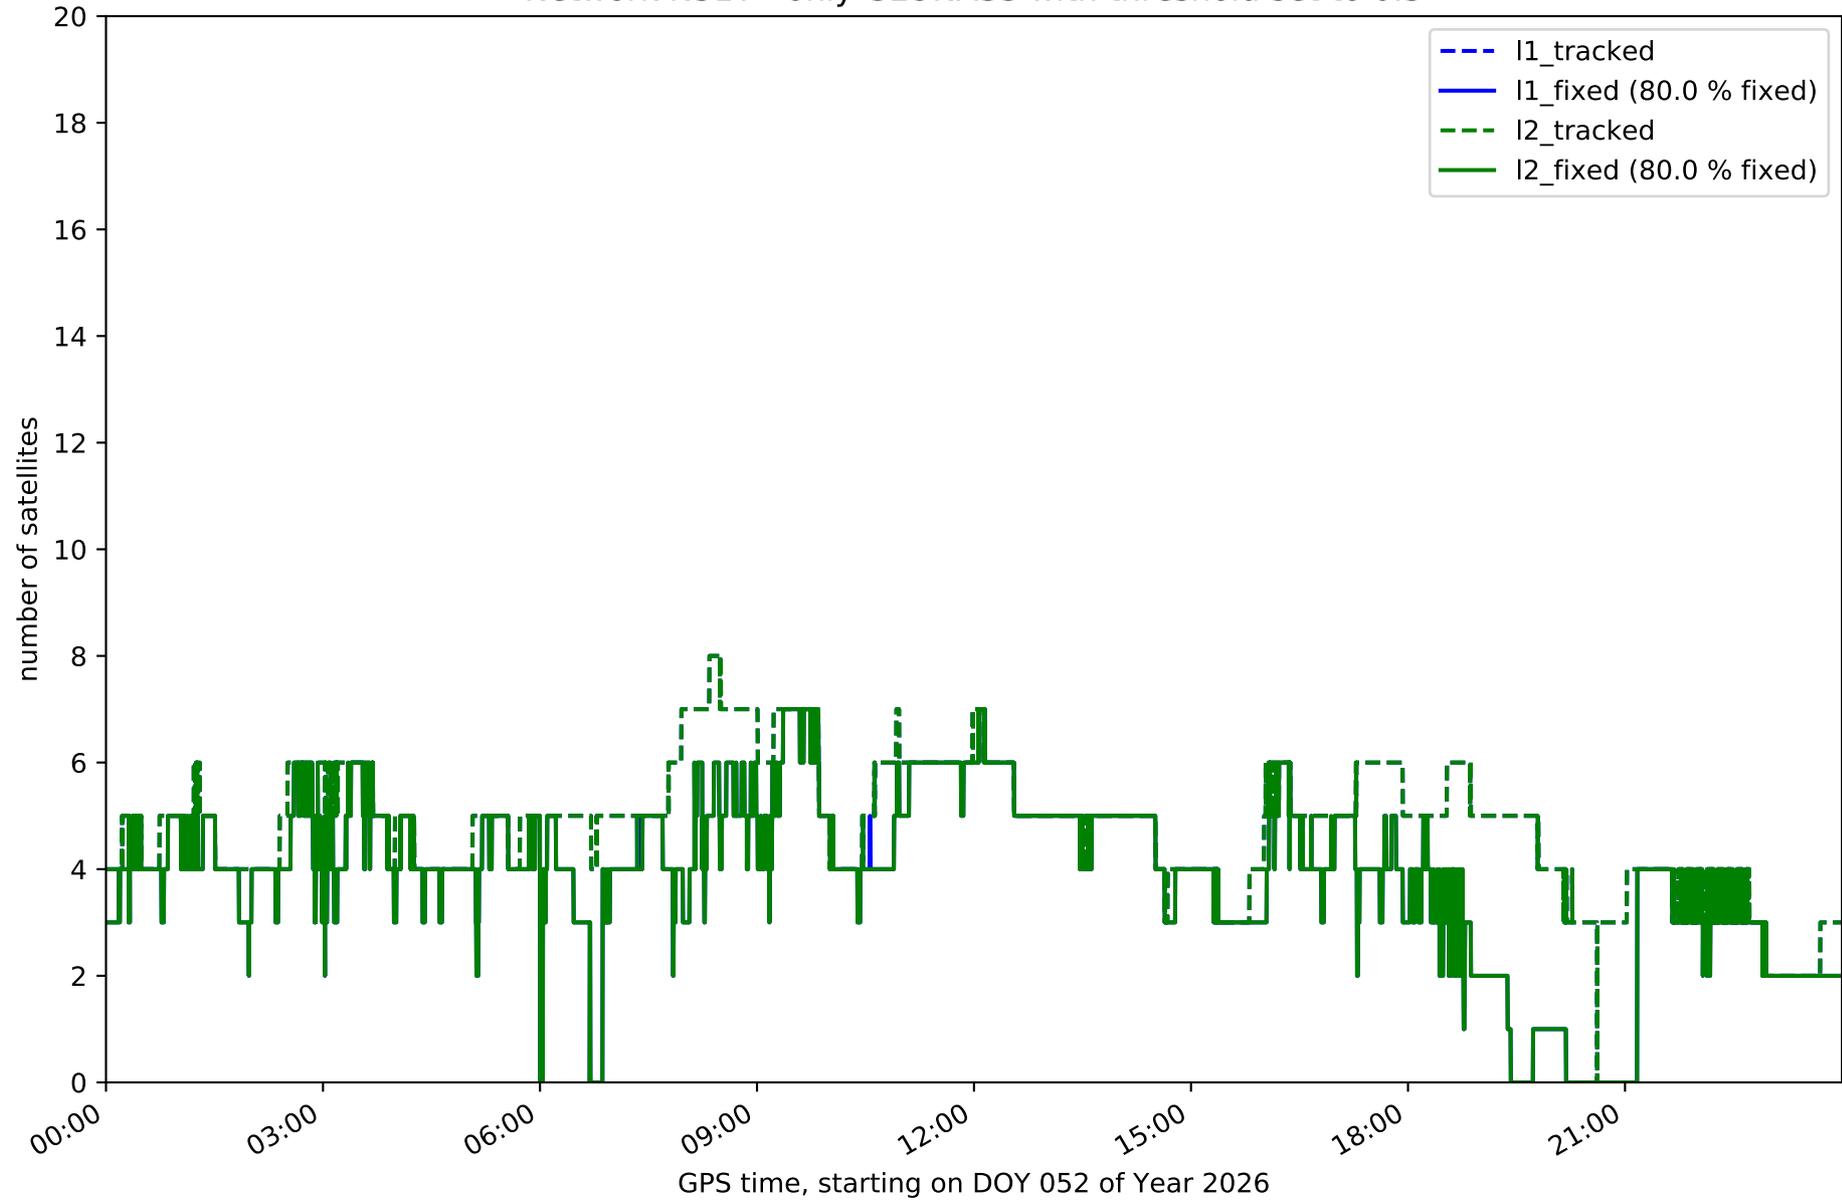


Network N31T - only BDS with threshold set to 0.3

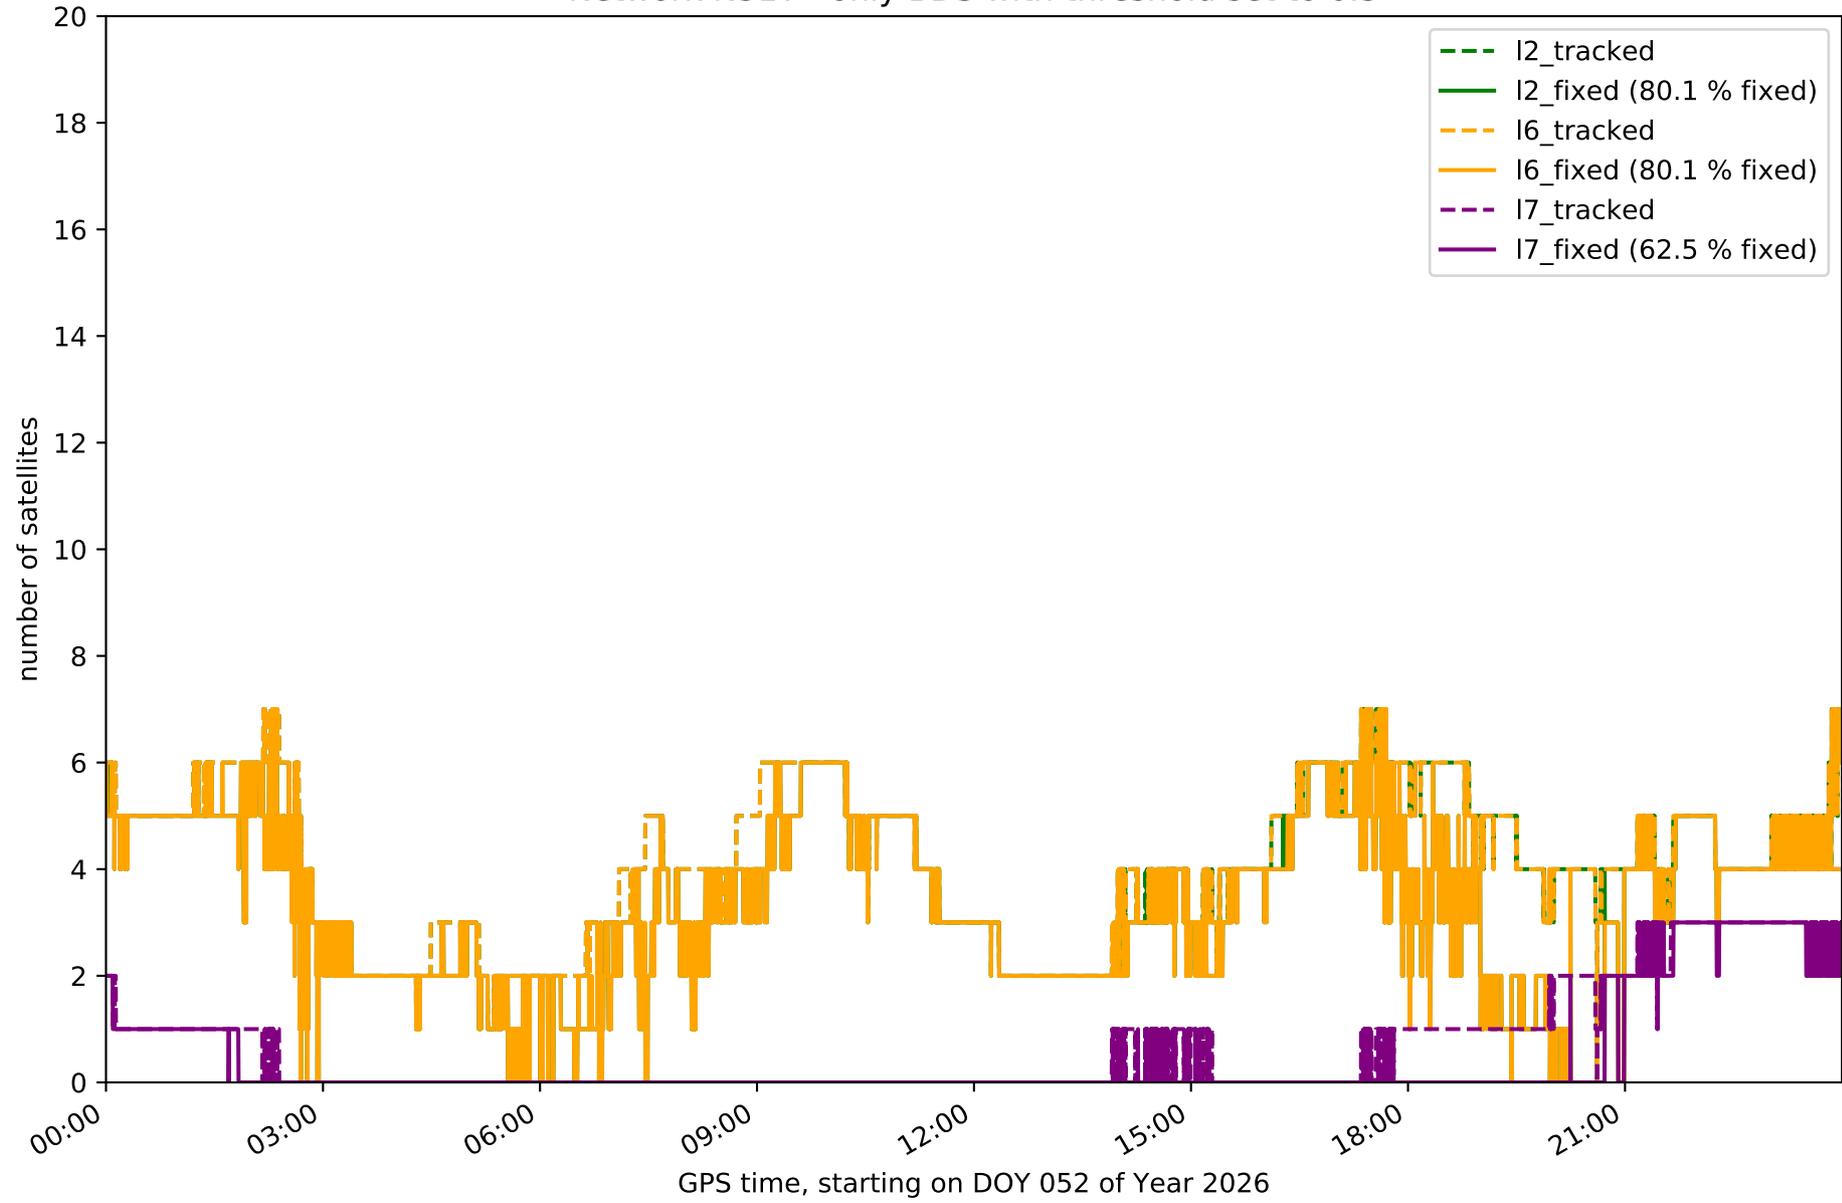


Network N31T - only Galileo with threshold set to 0.3

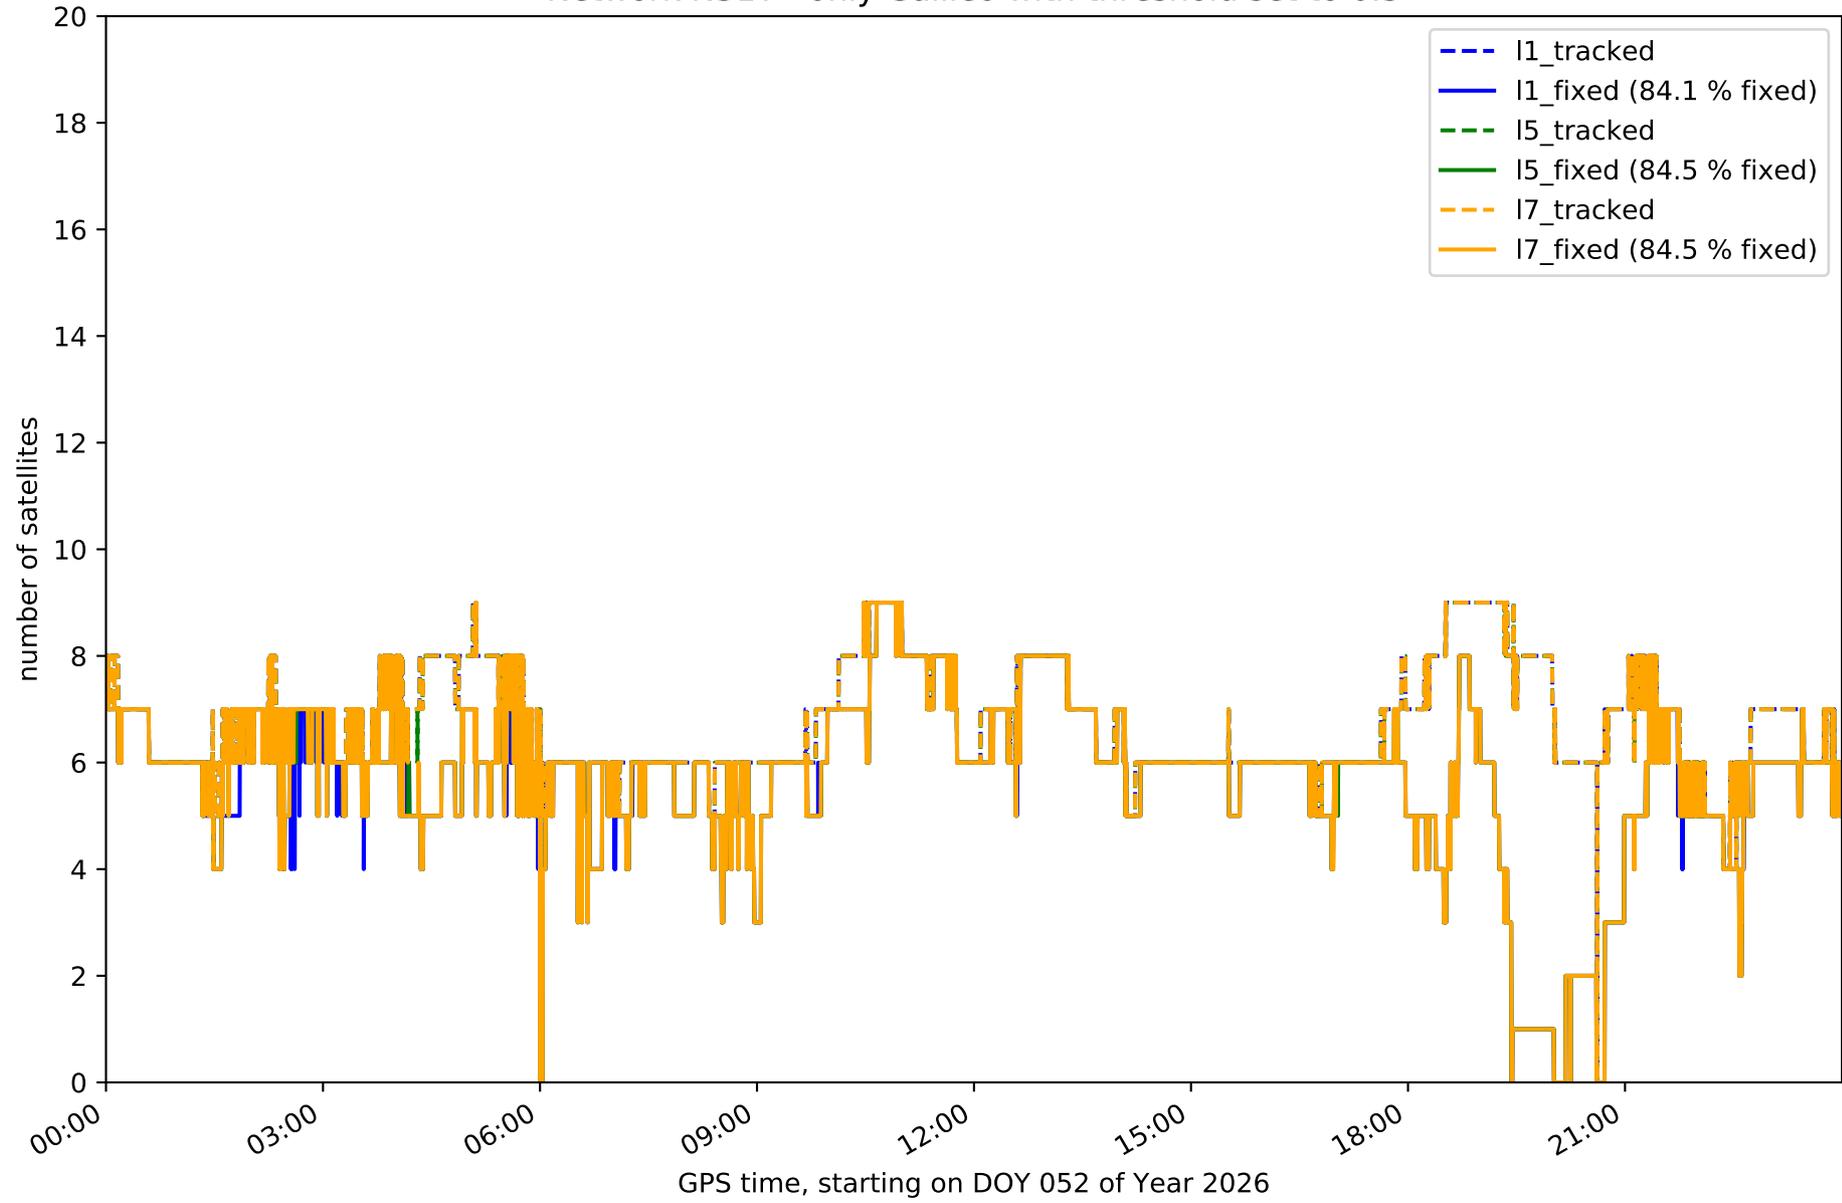


Station FUER in network N31T

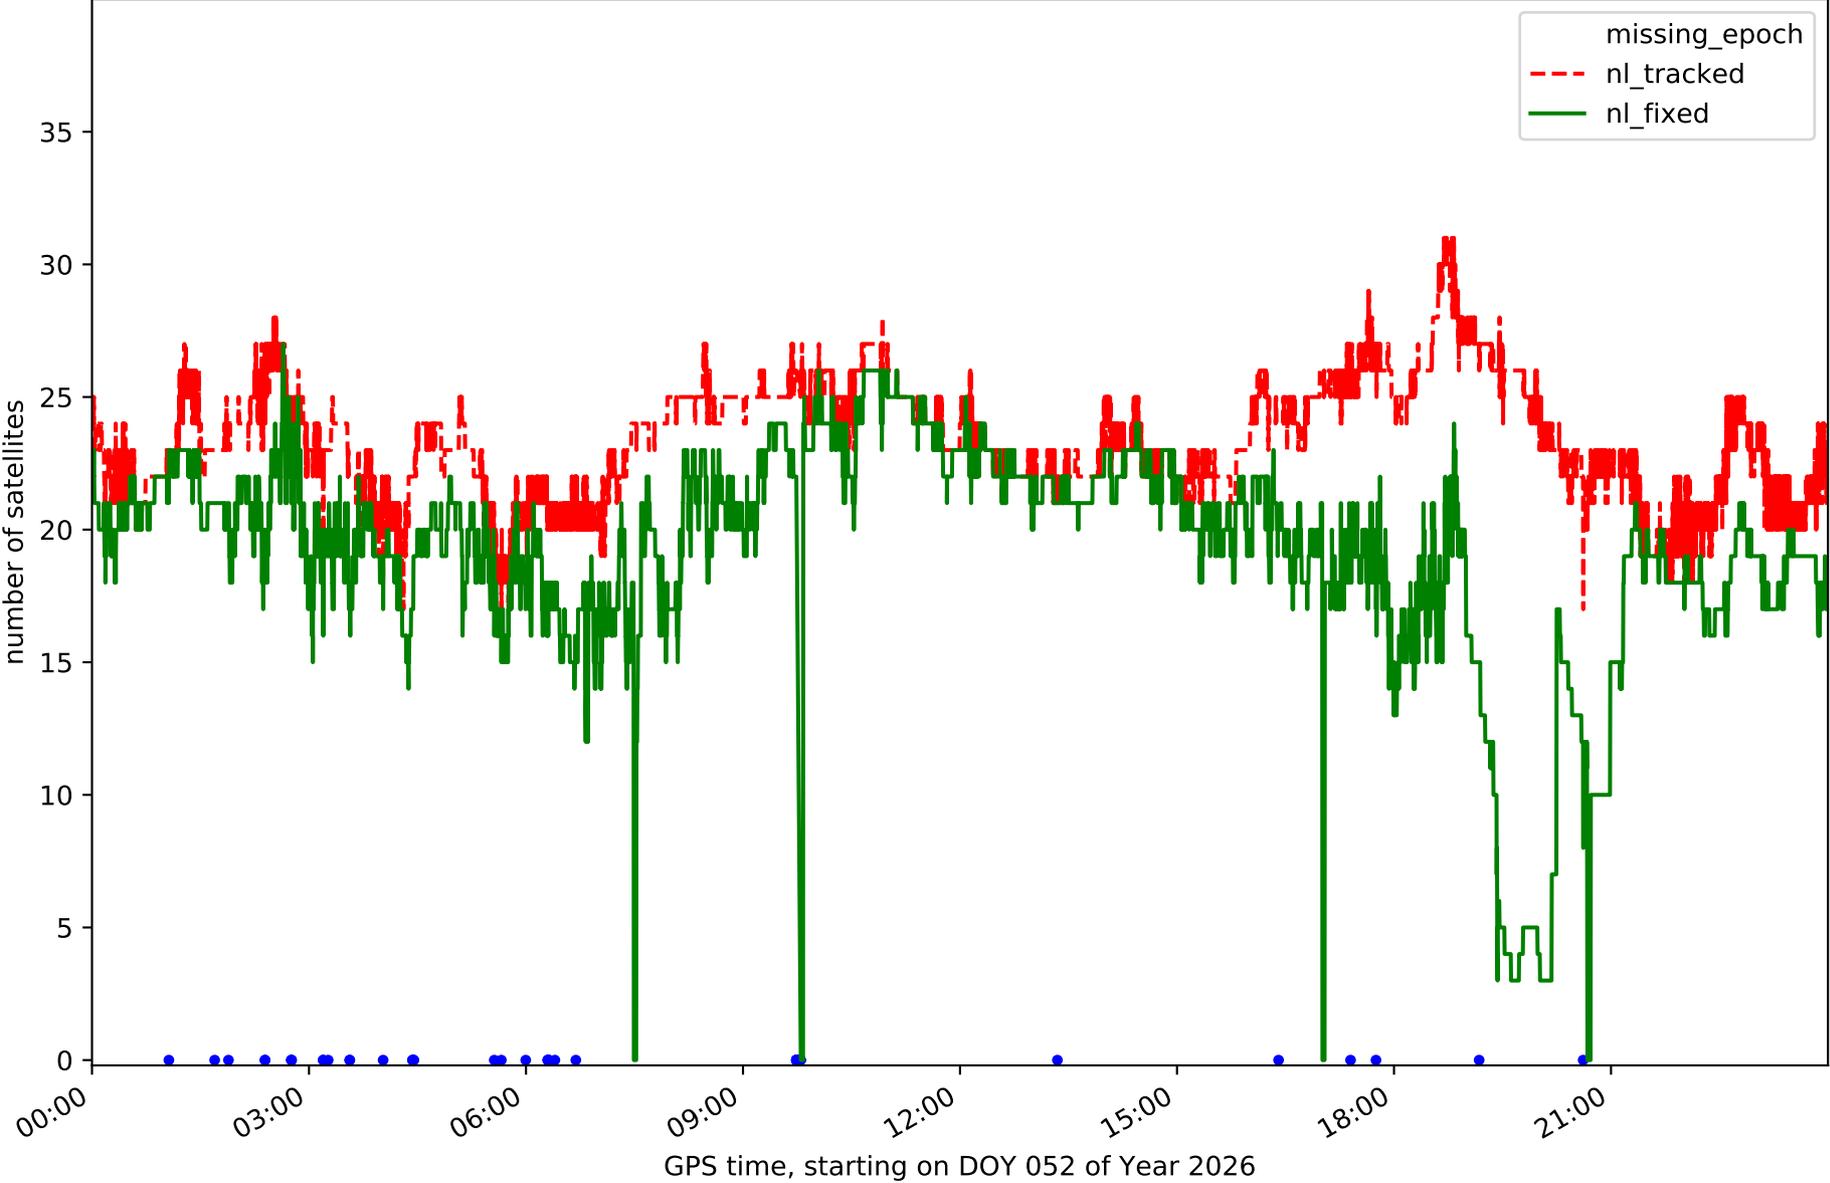


Station LALA in network N31T

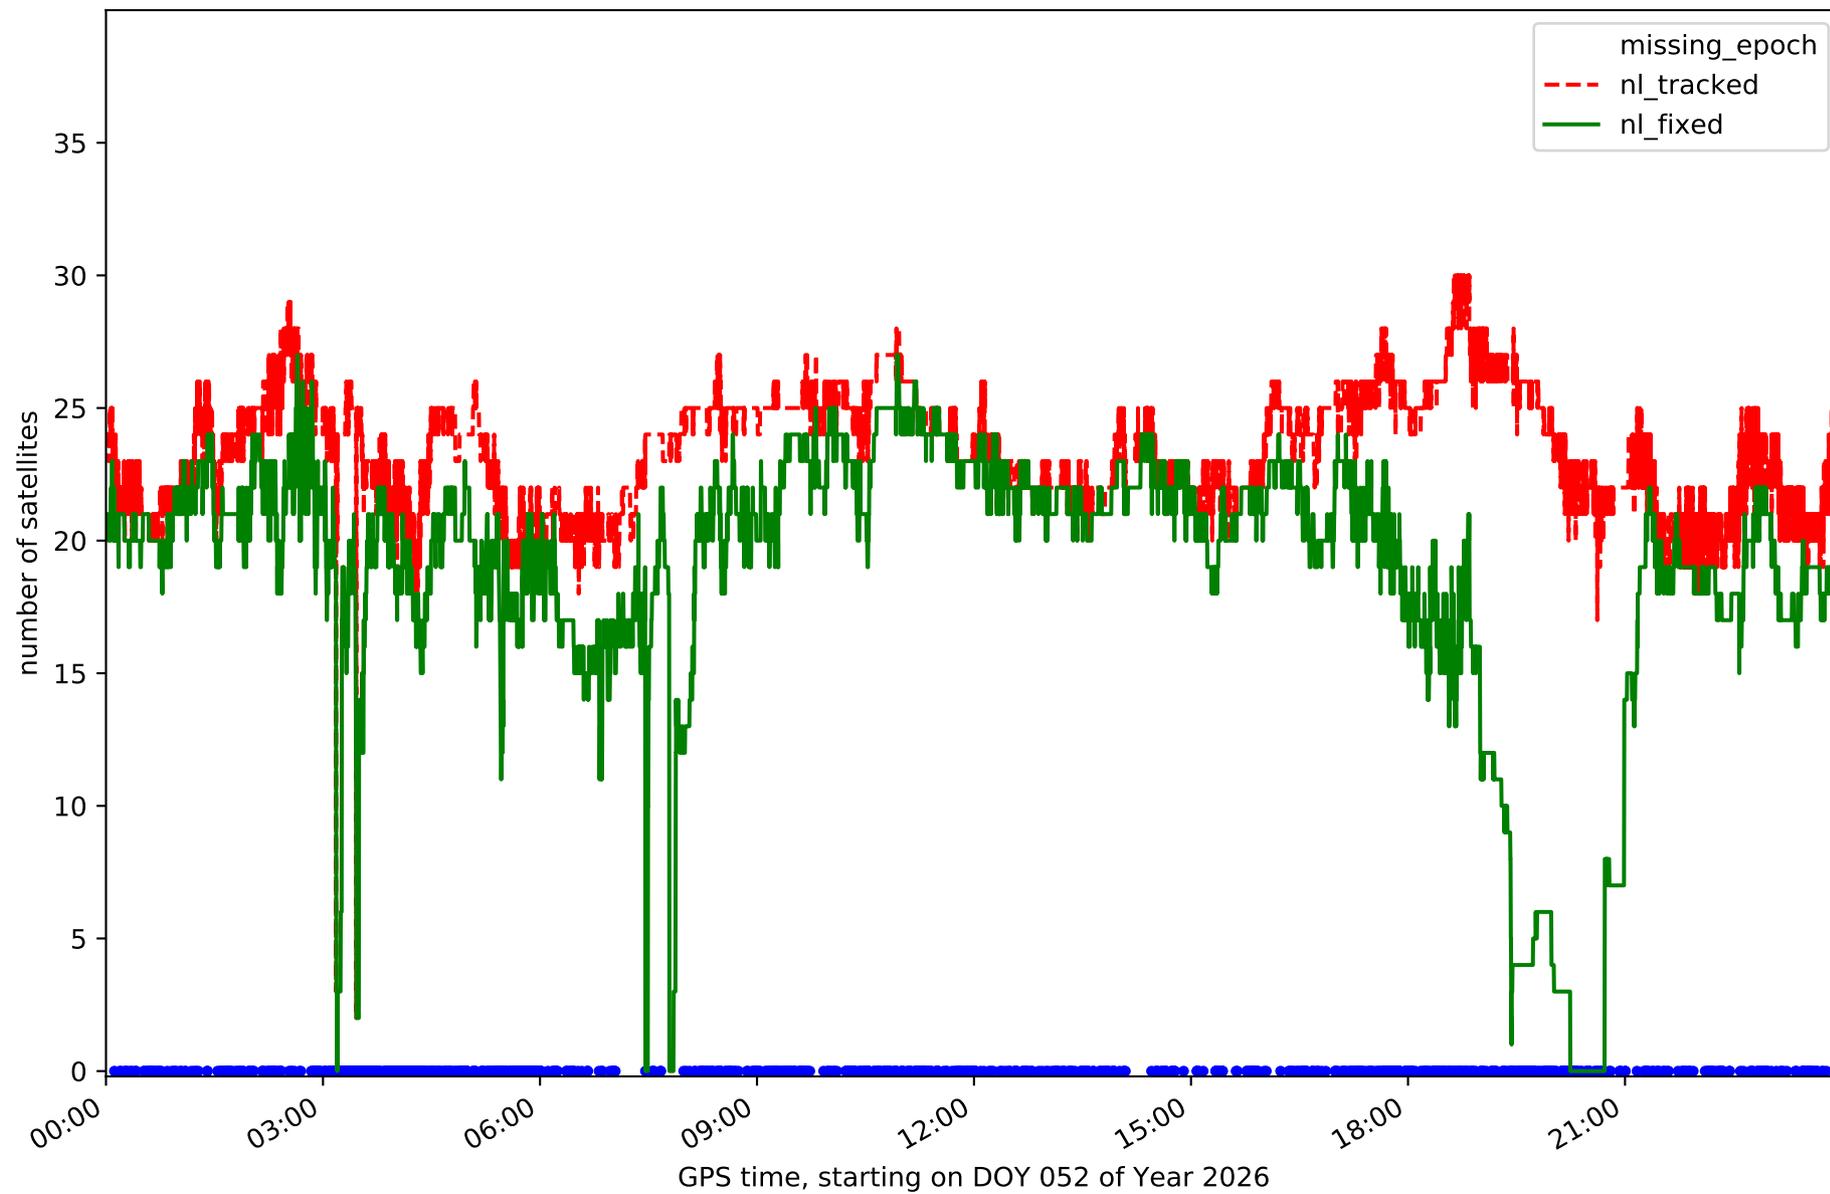


Station LZ01 in network N31T

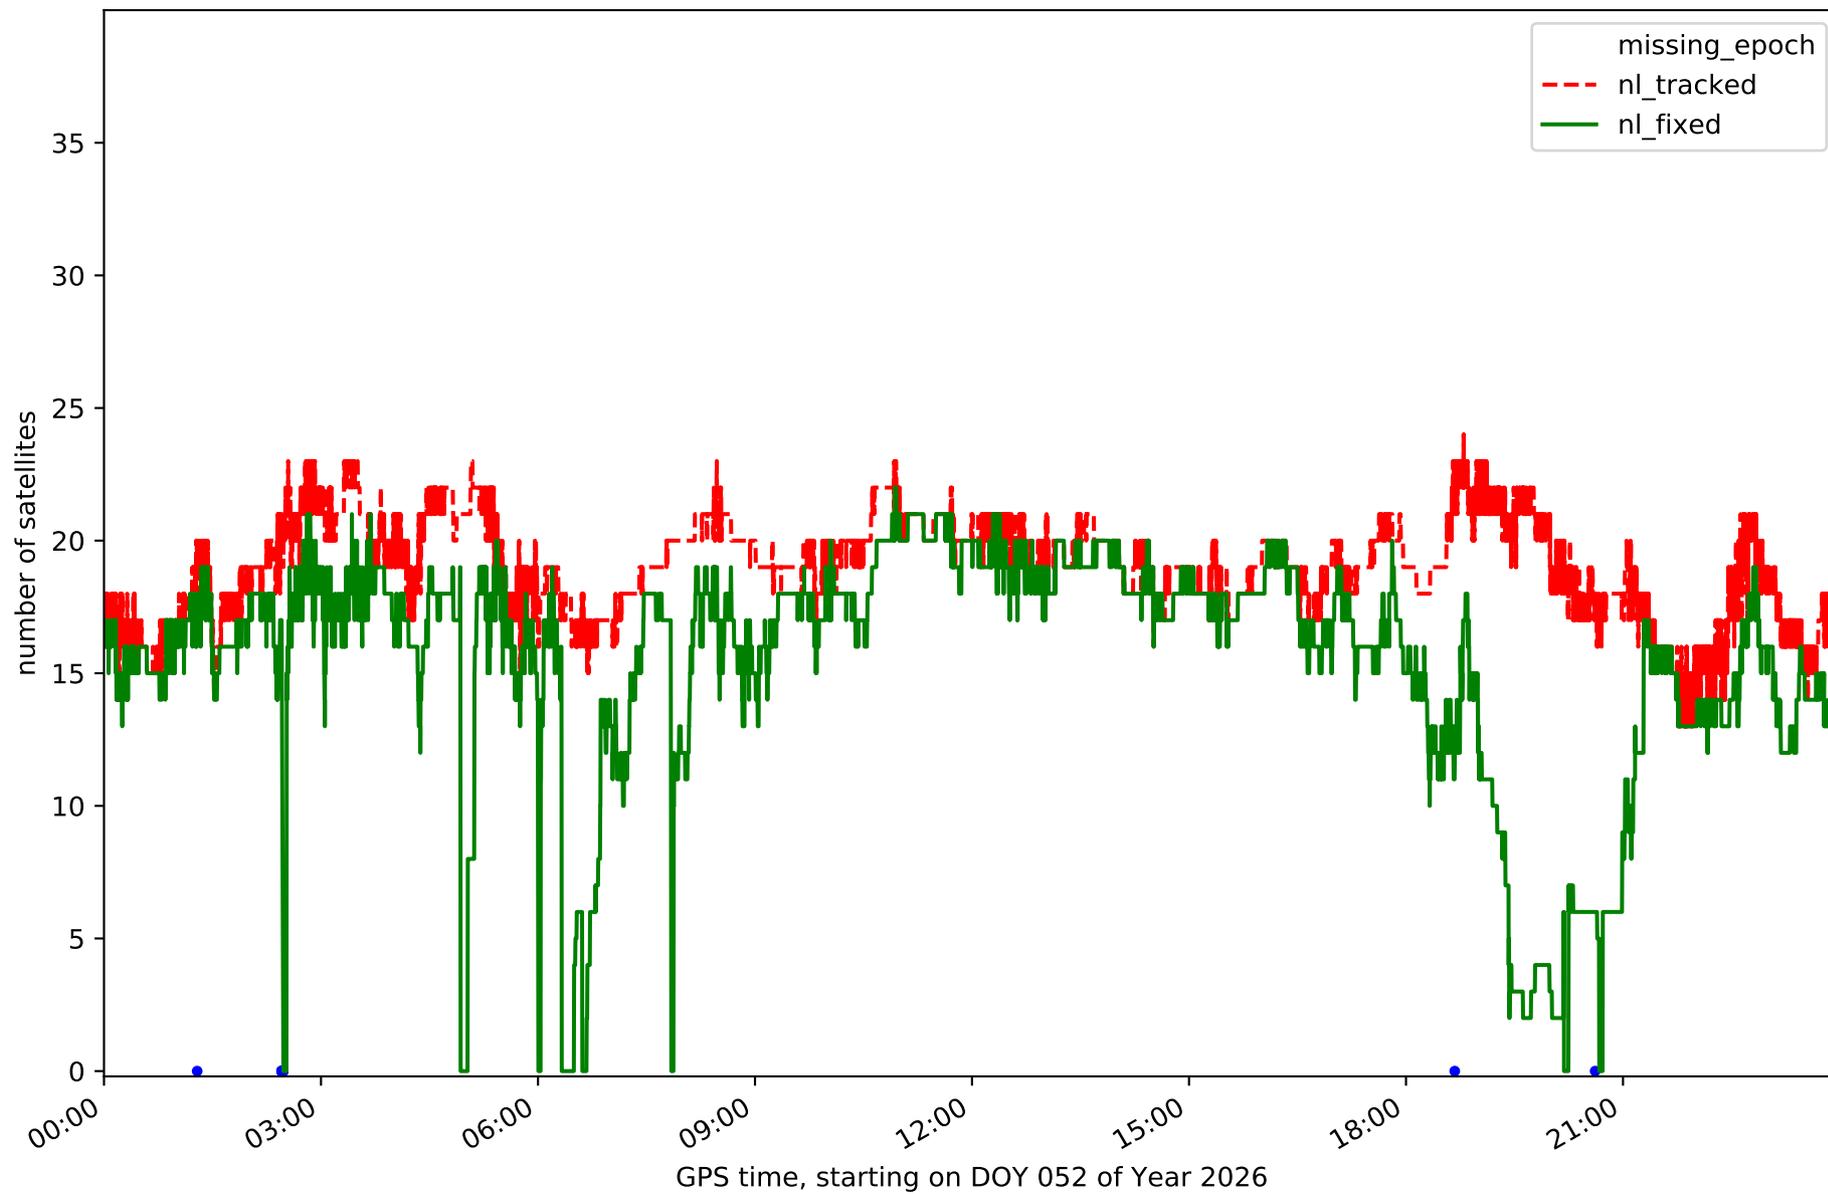


Station LZ02 in network N31T

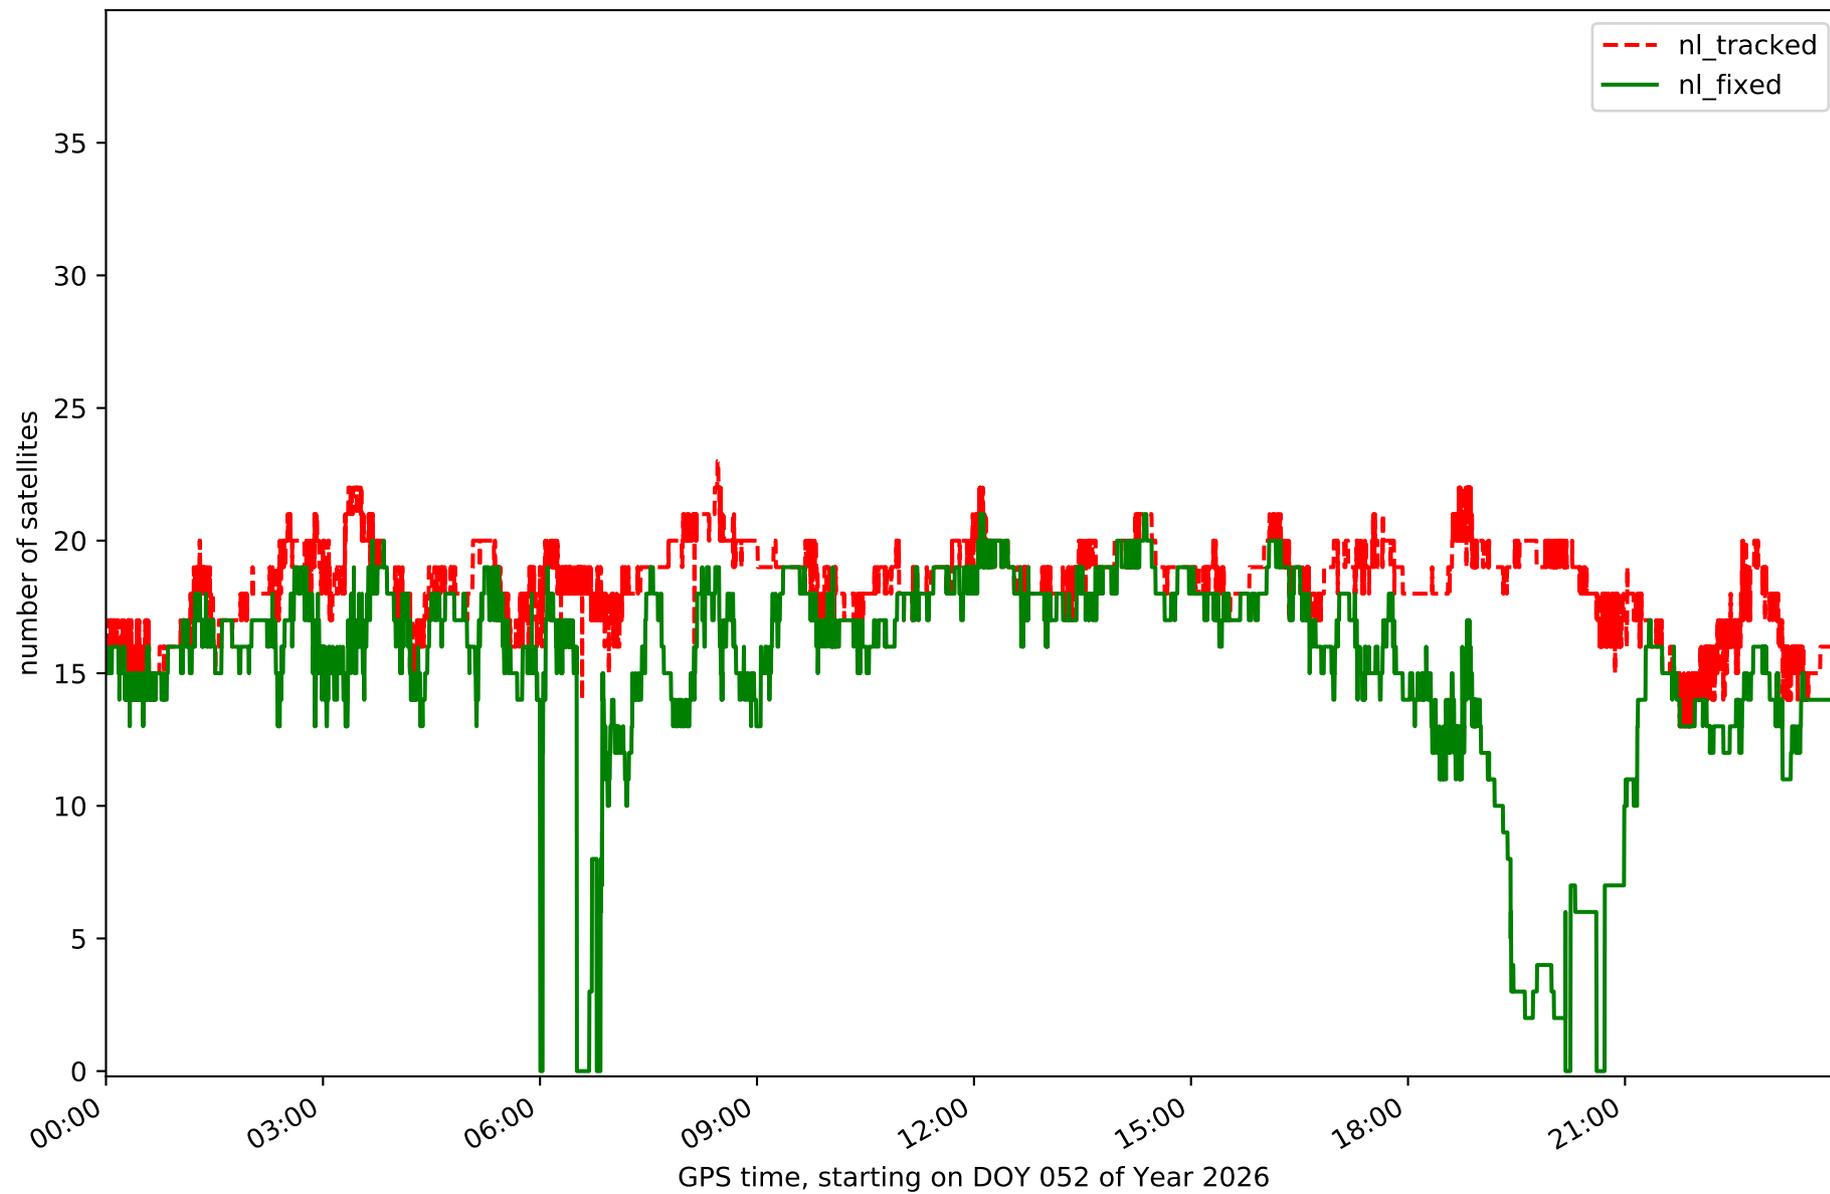


Station LZ03 in network N31T

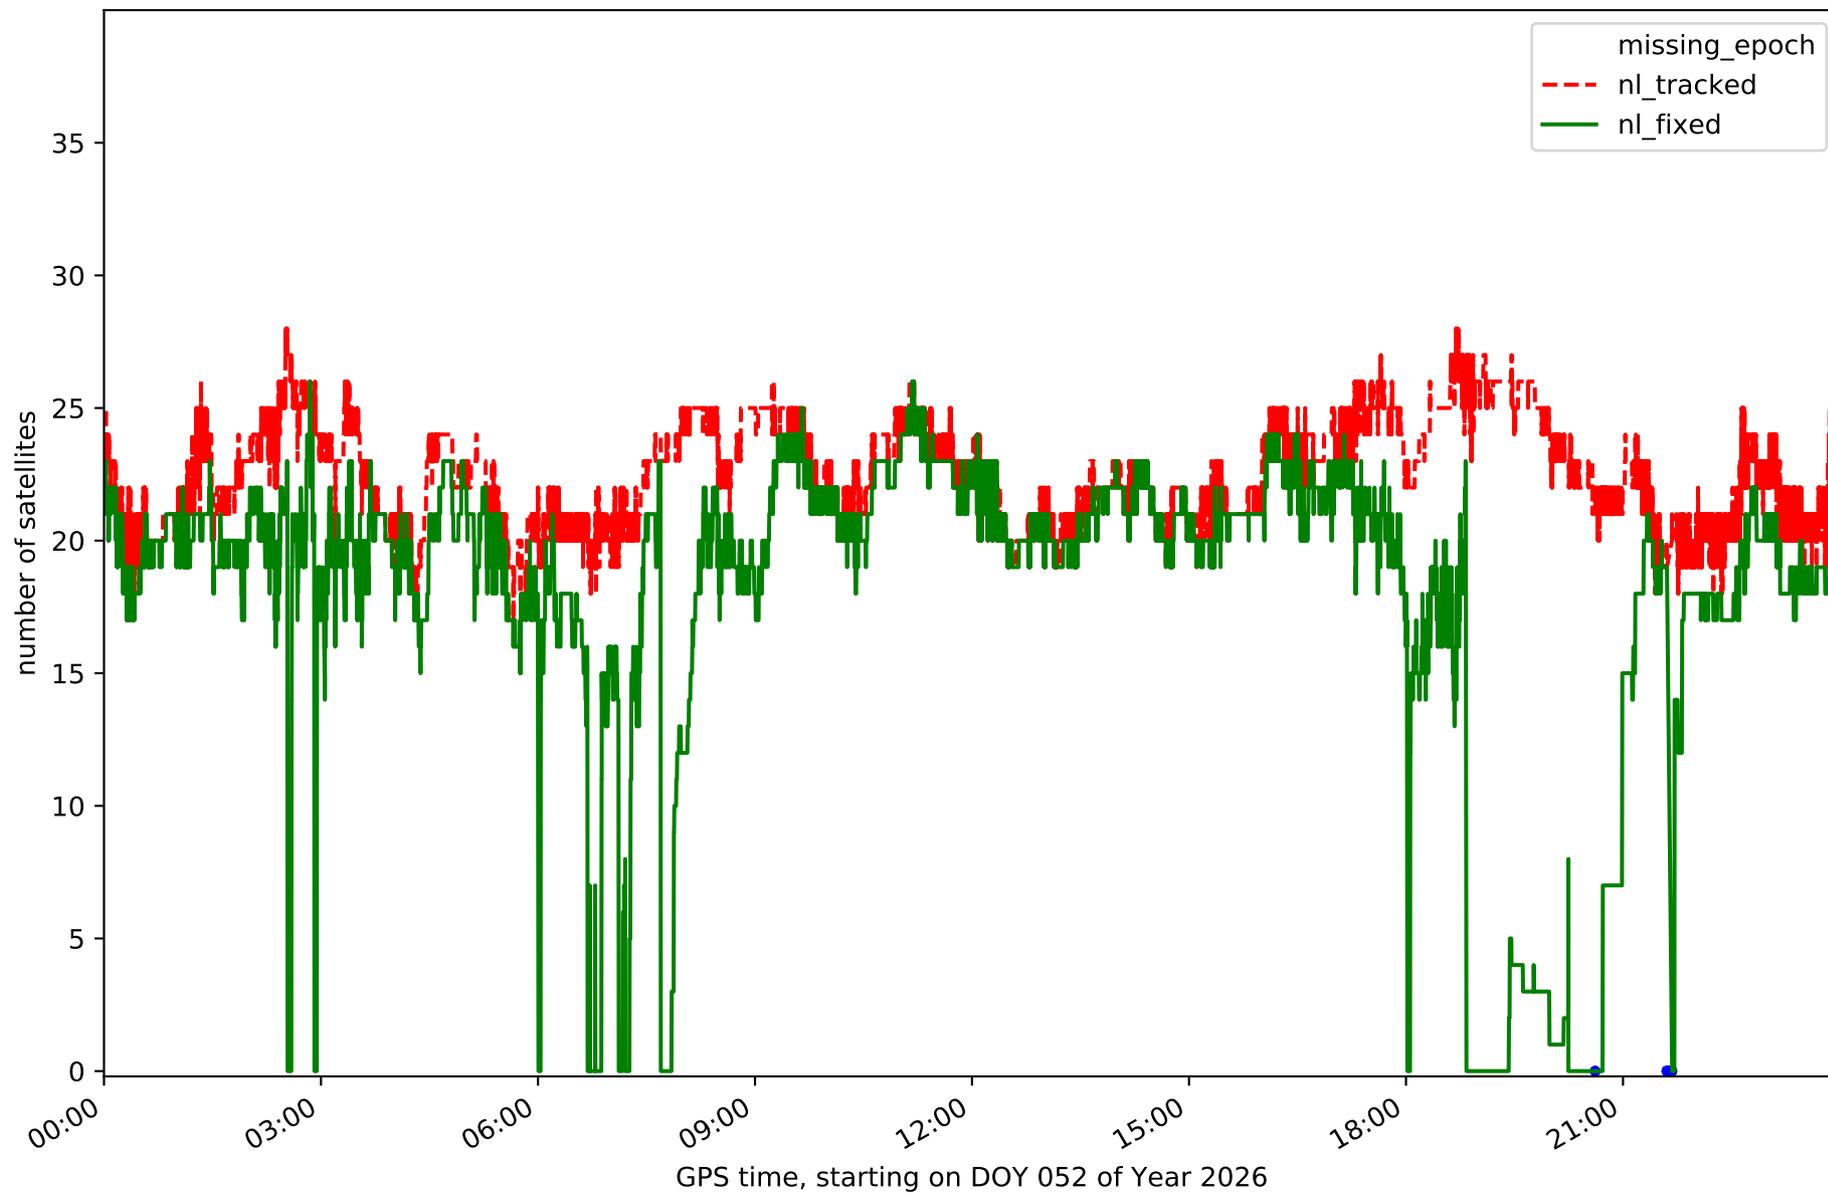


Station MASP in network N31T

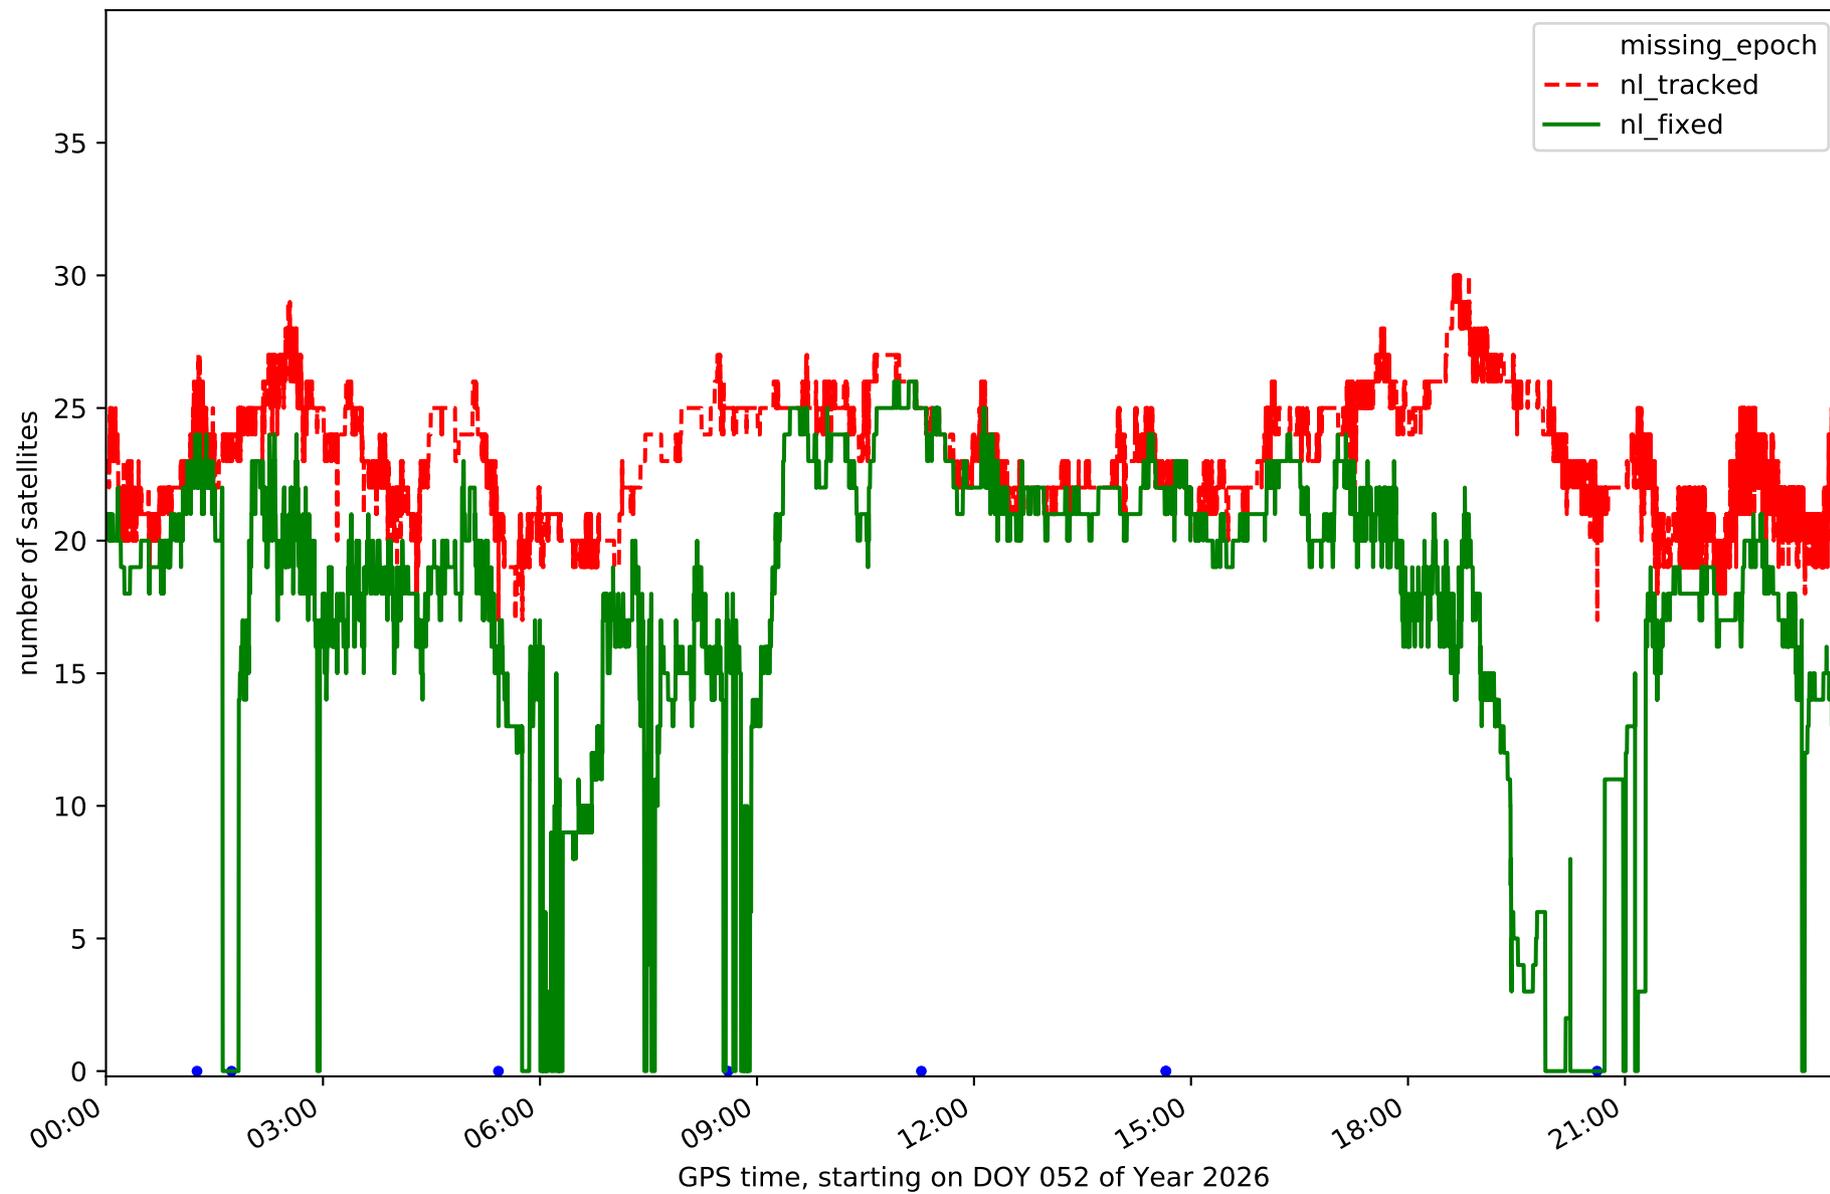


Station ULP2 in network N31T

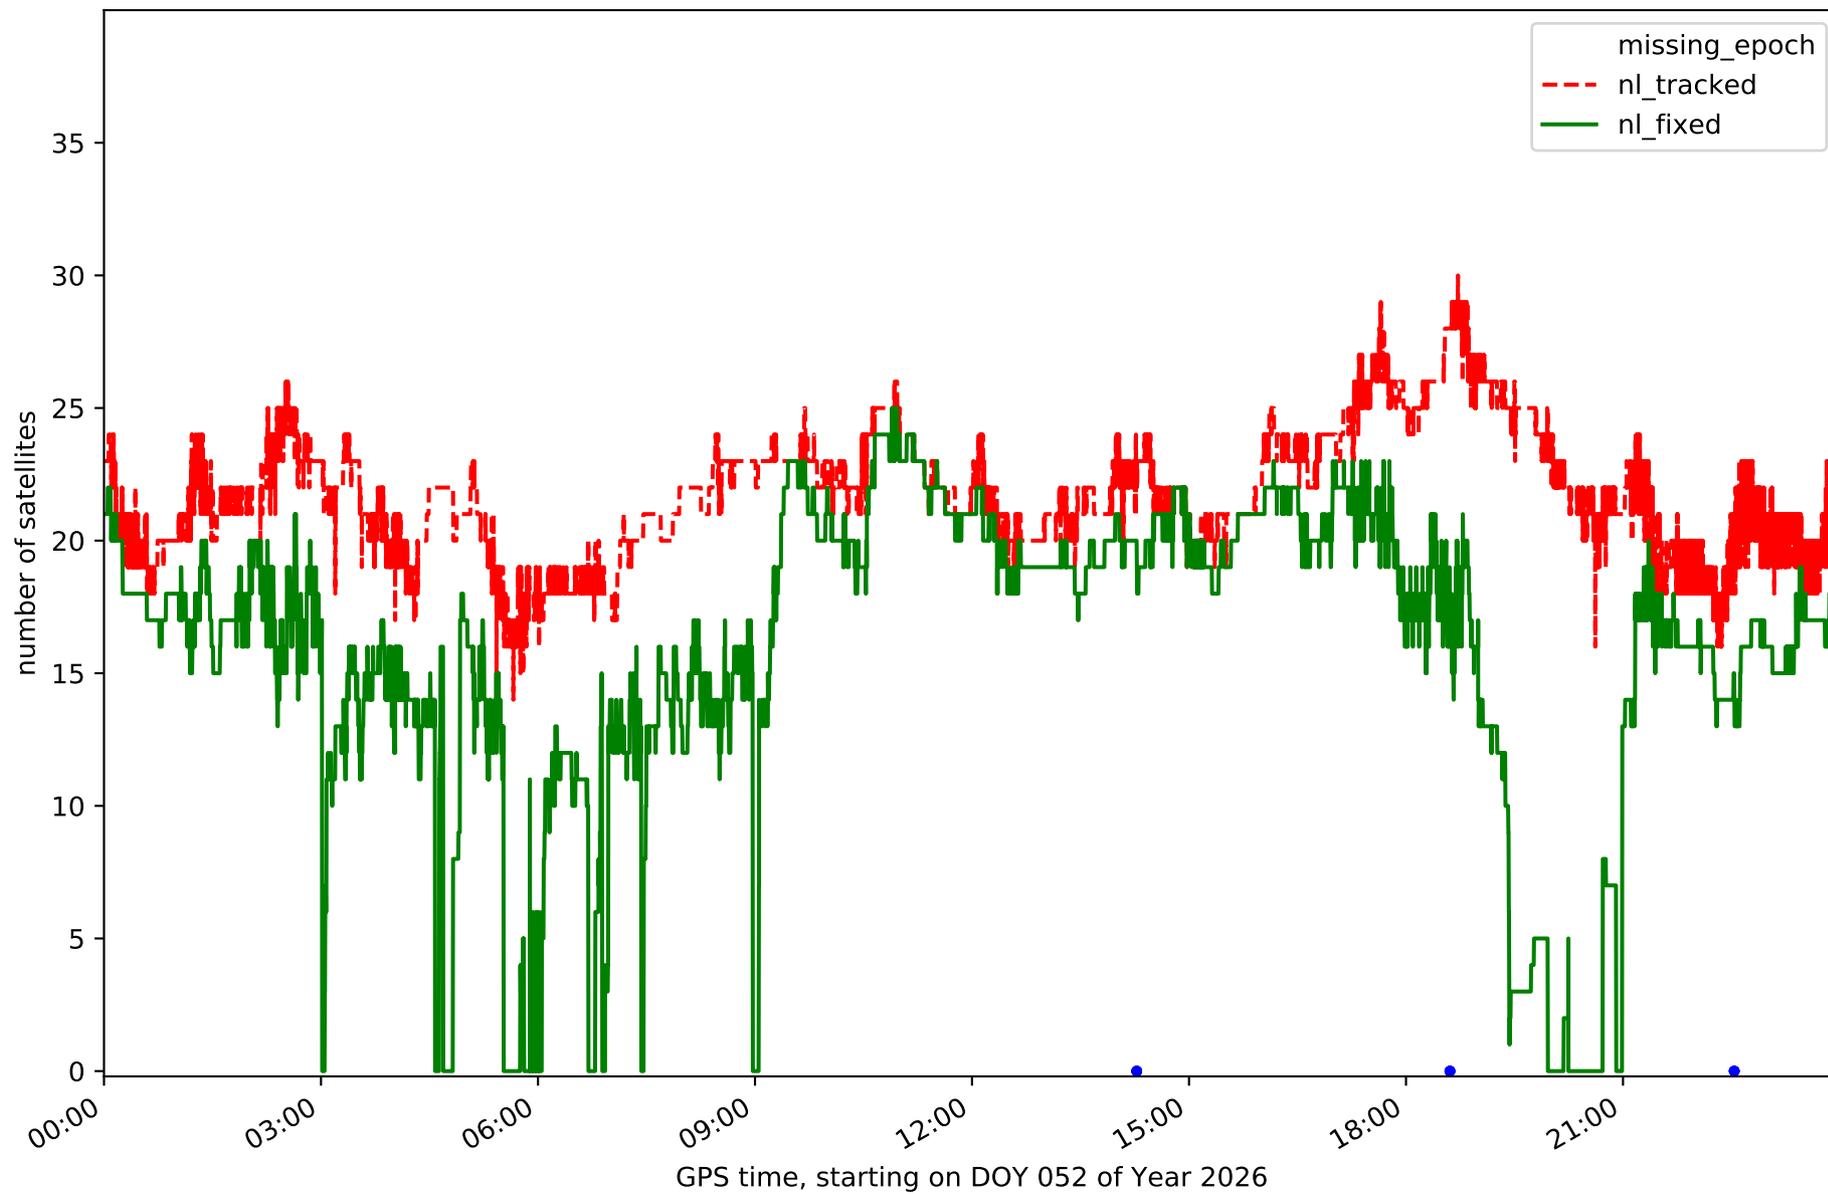


RefCheck for station FUER in network N31T

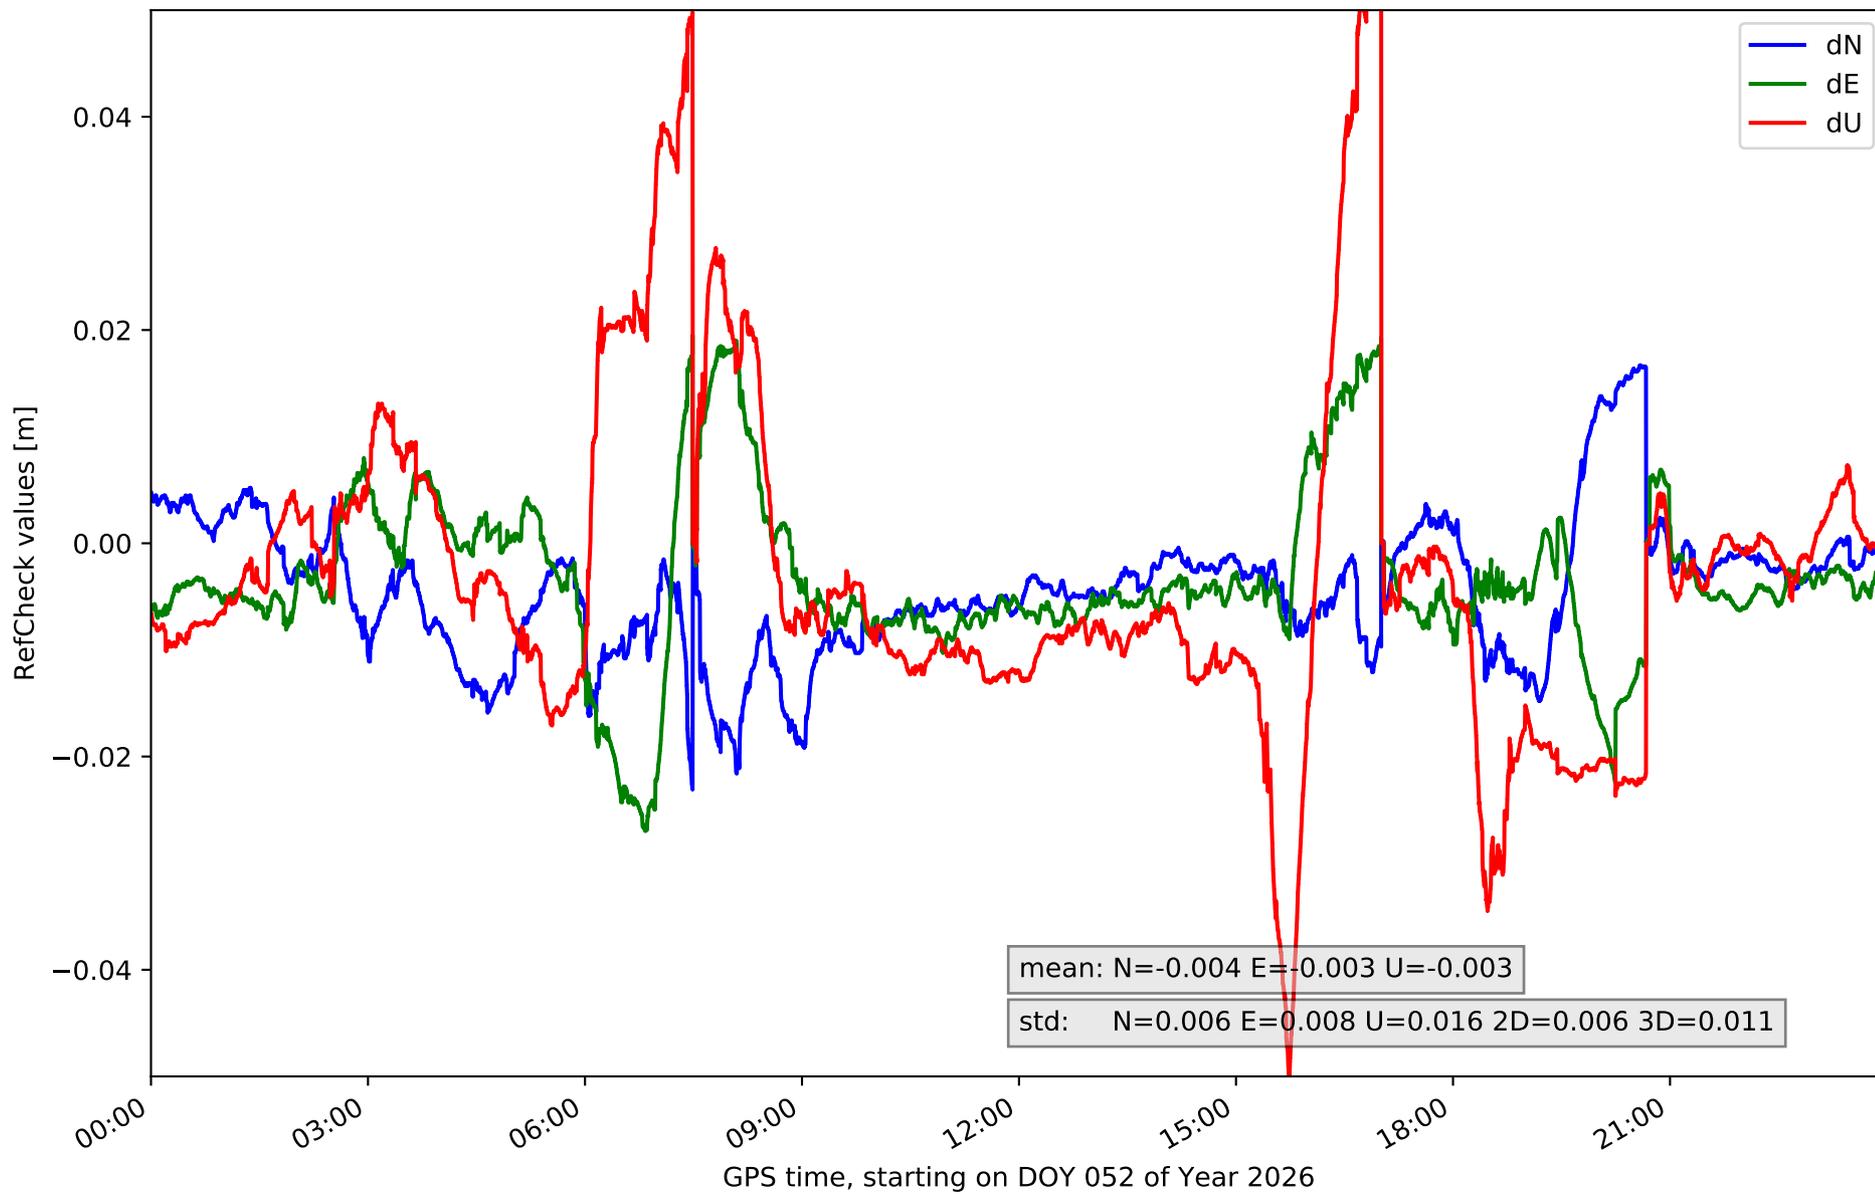


RefCheck for station LALA in network N31T

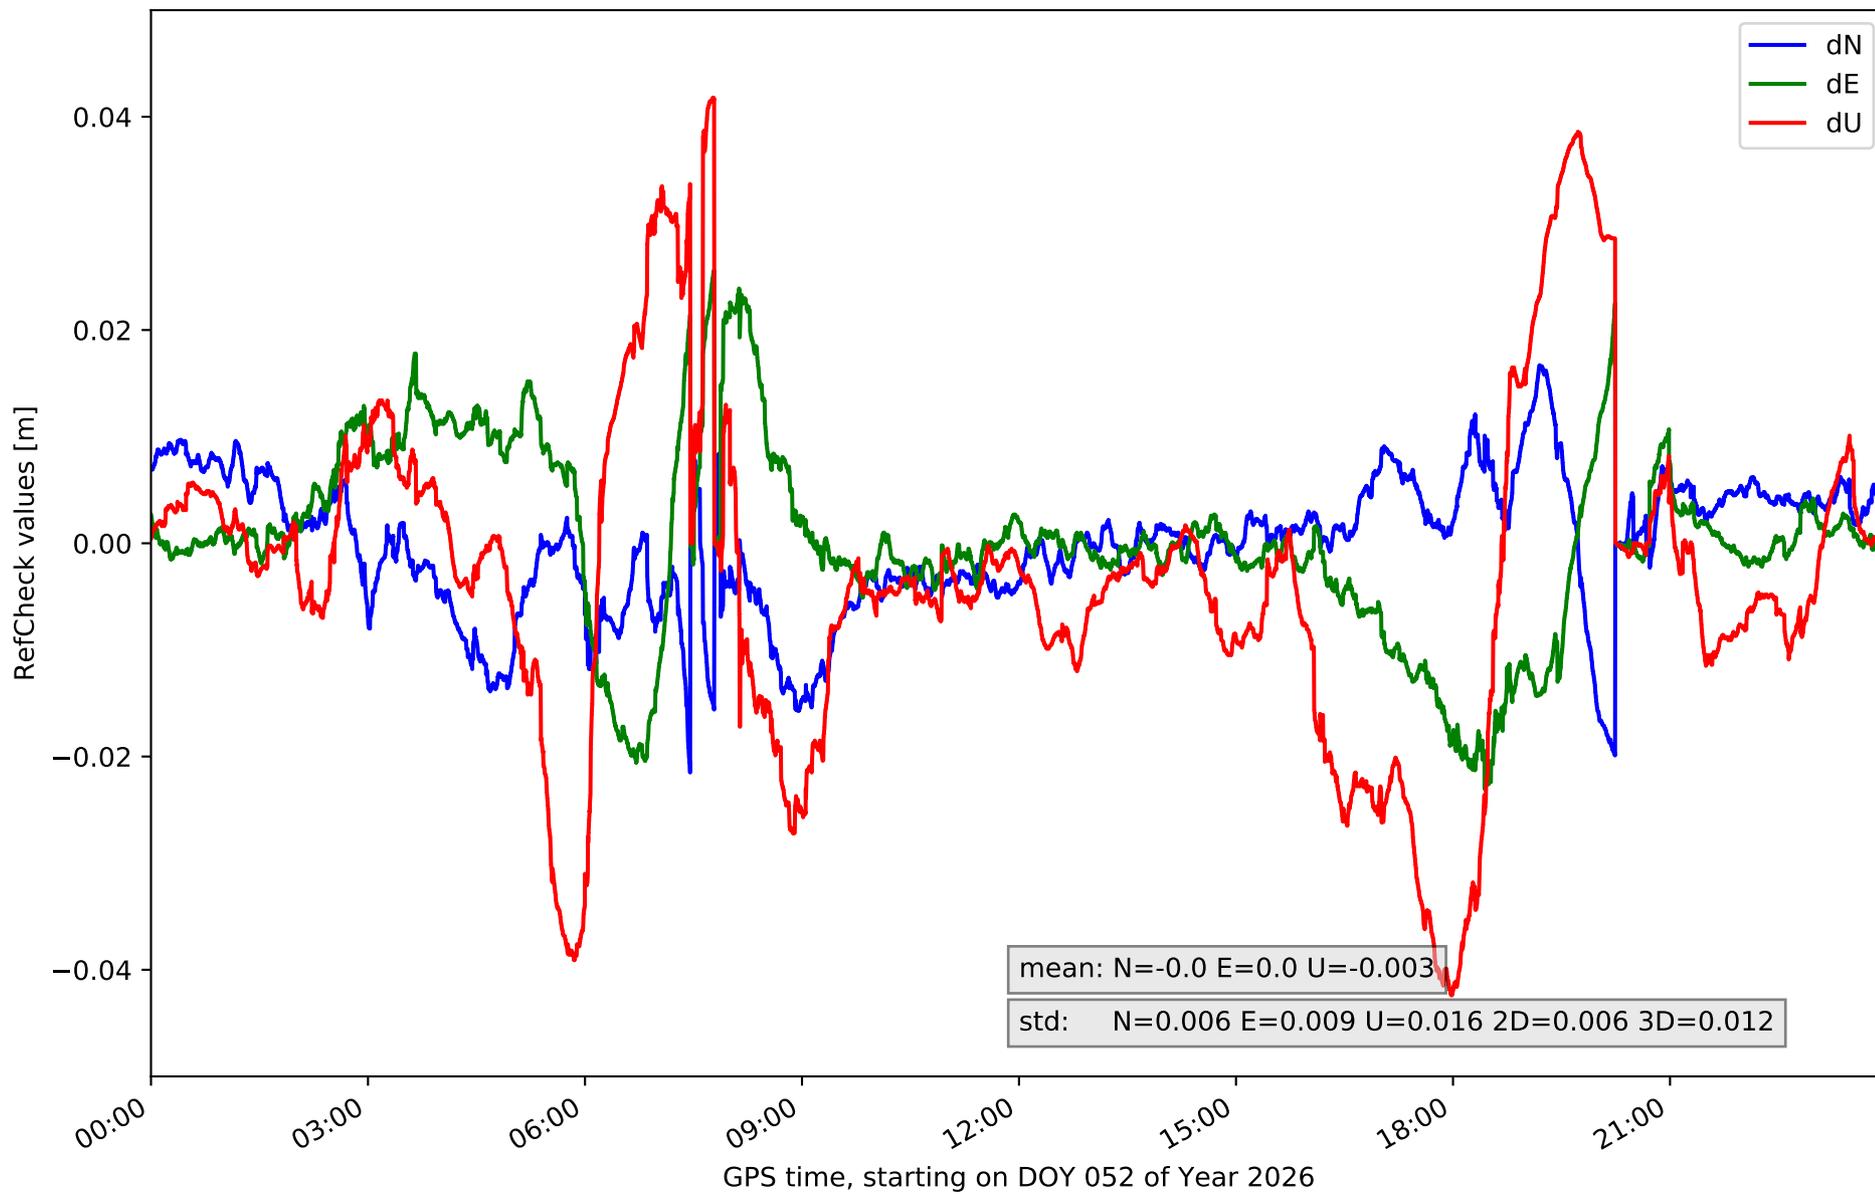


RefCheck for station LZ01 in network N31T

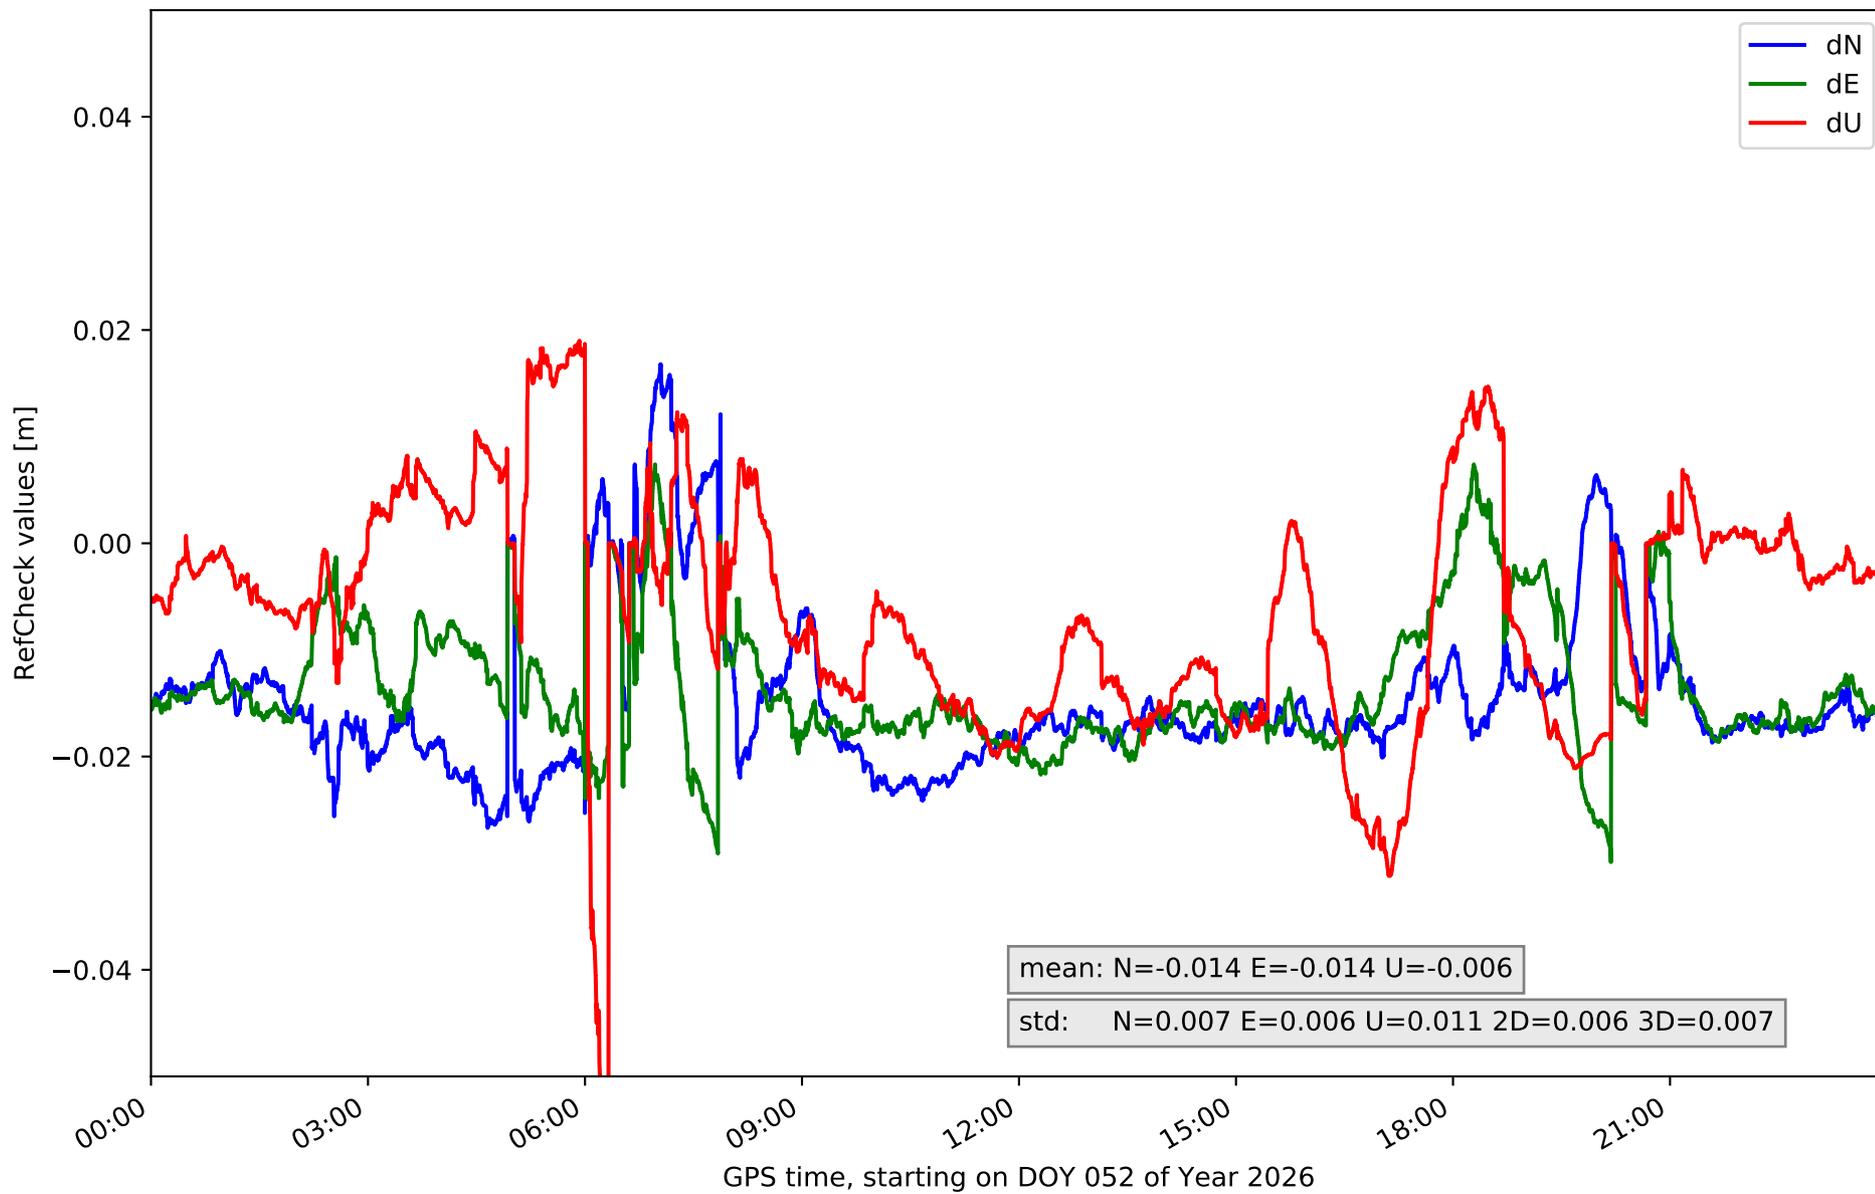


# RefCheck for station LZ02 in network N31T

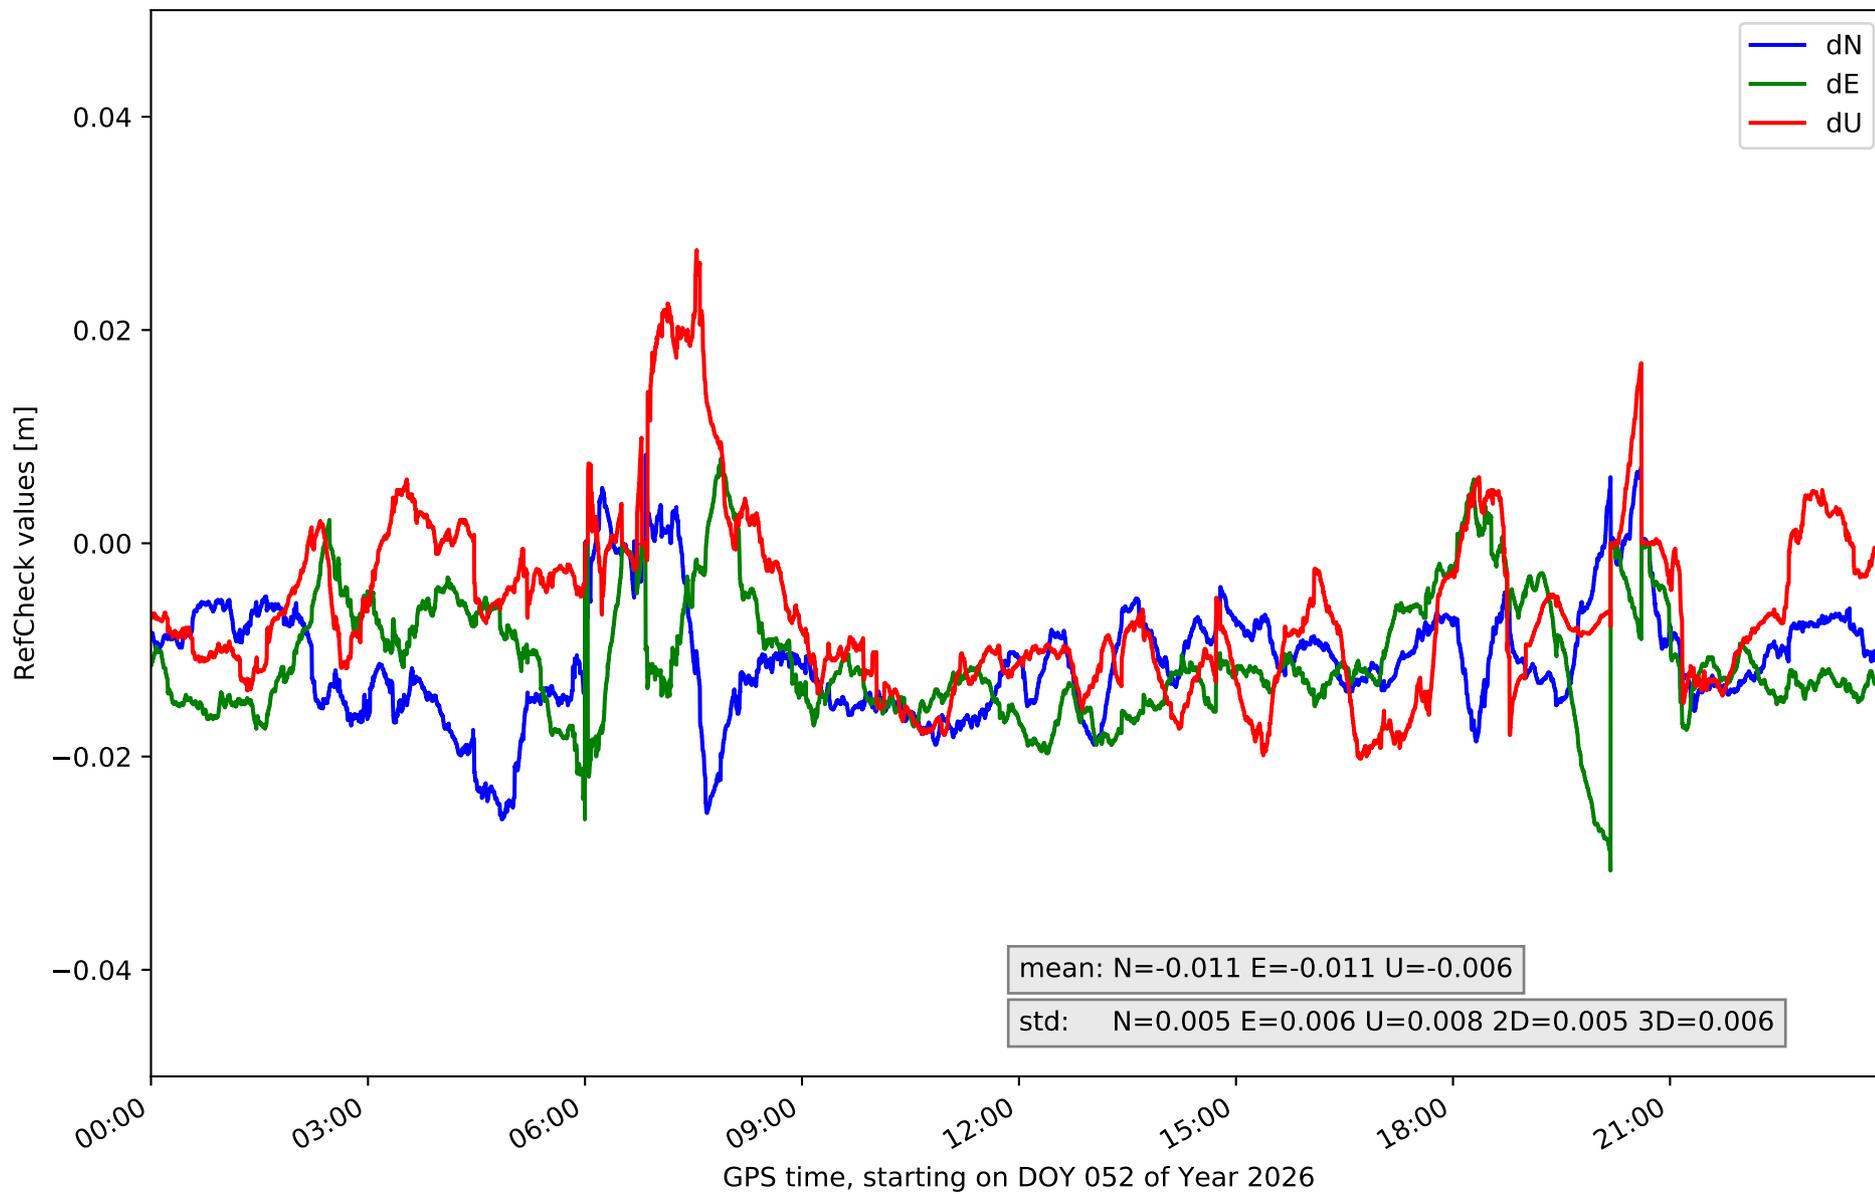


### RefCheck for station LZ03 in network N31T

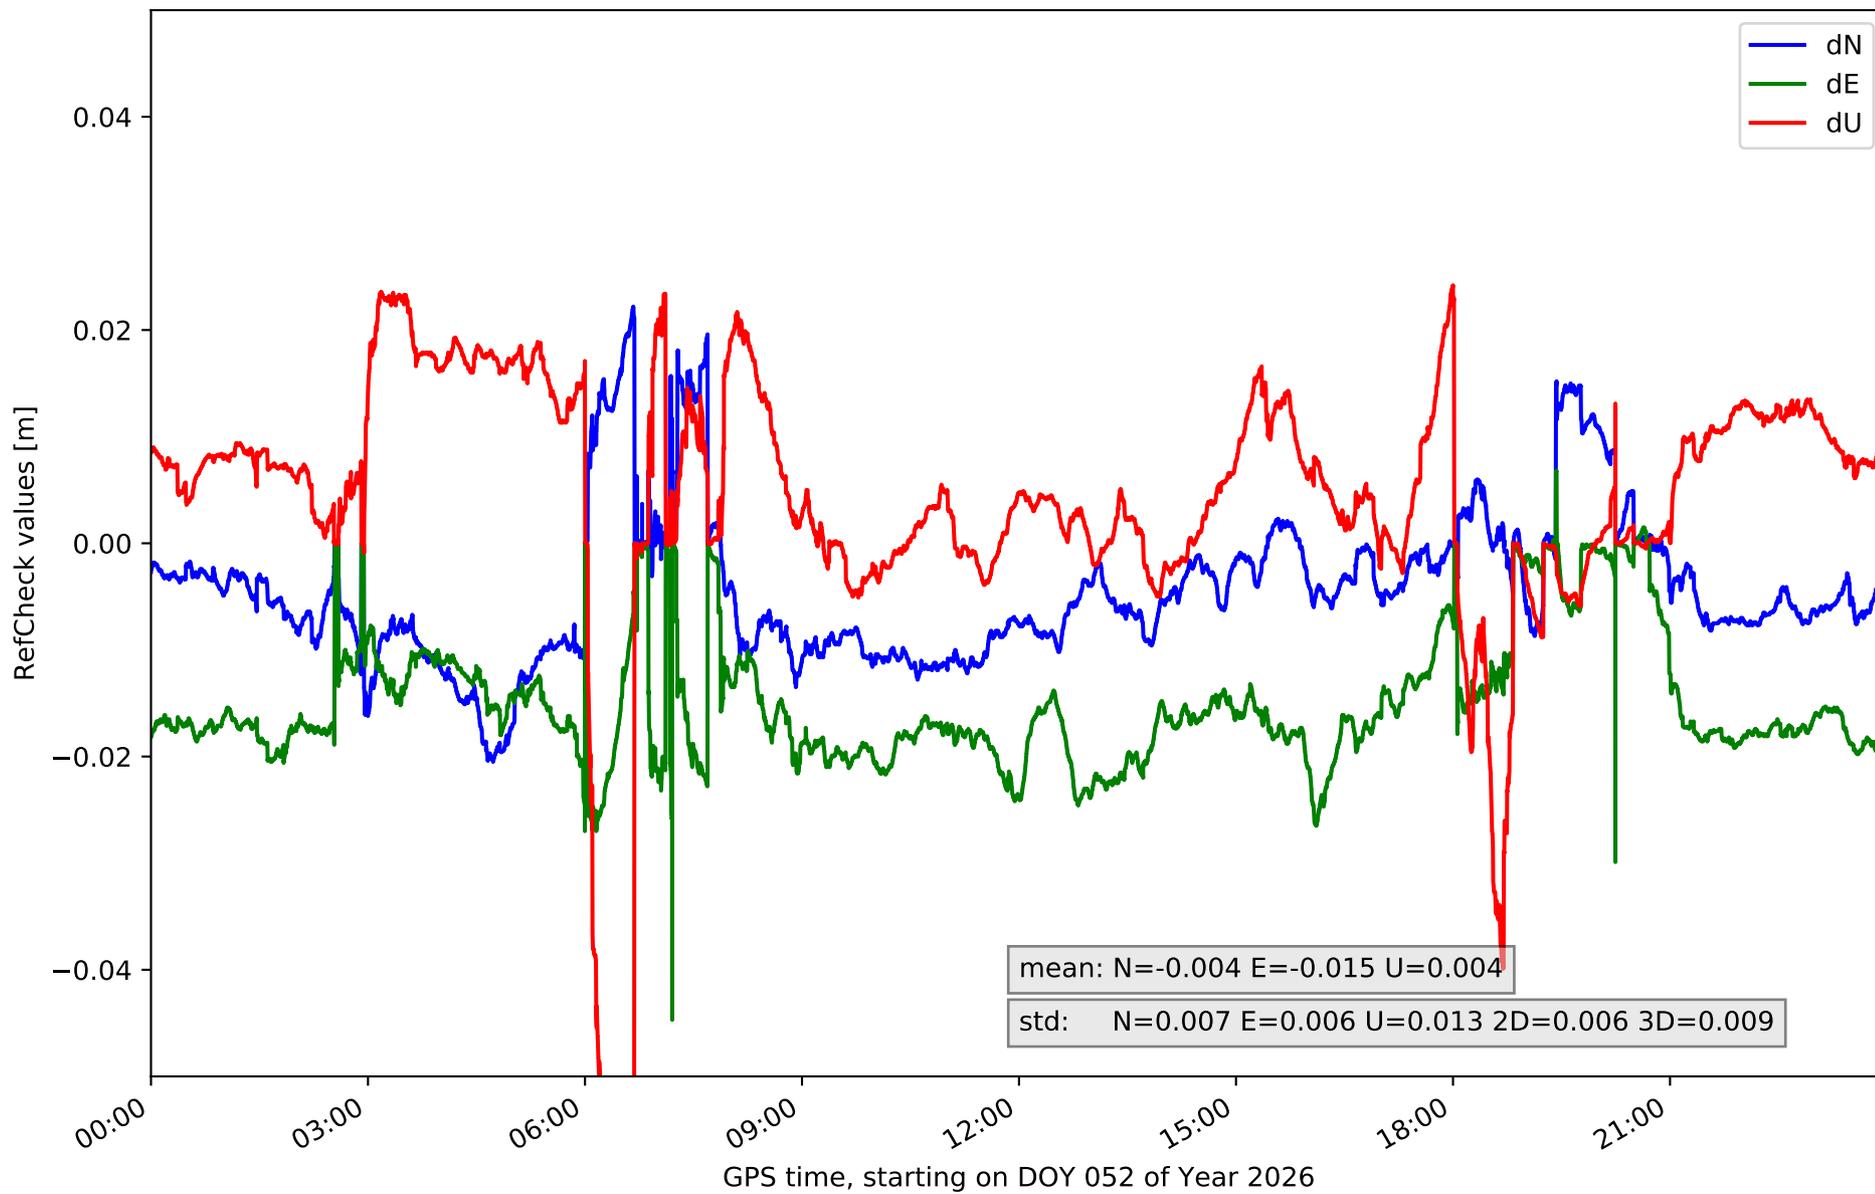

RefCheck for station MASP in network N31T

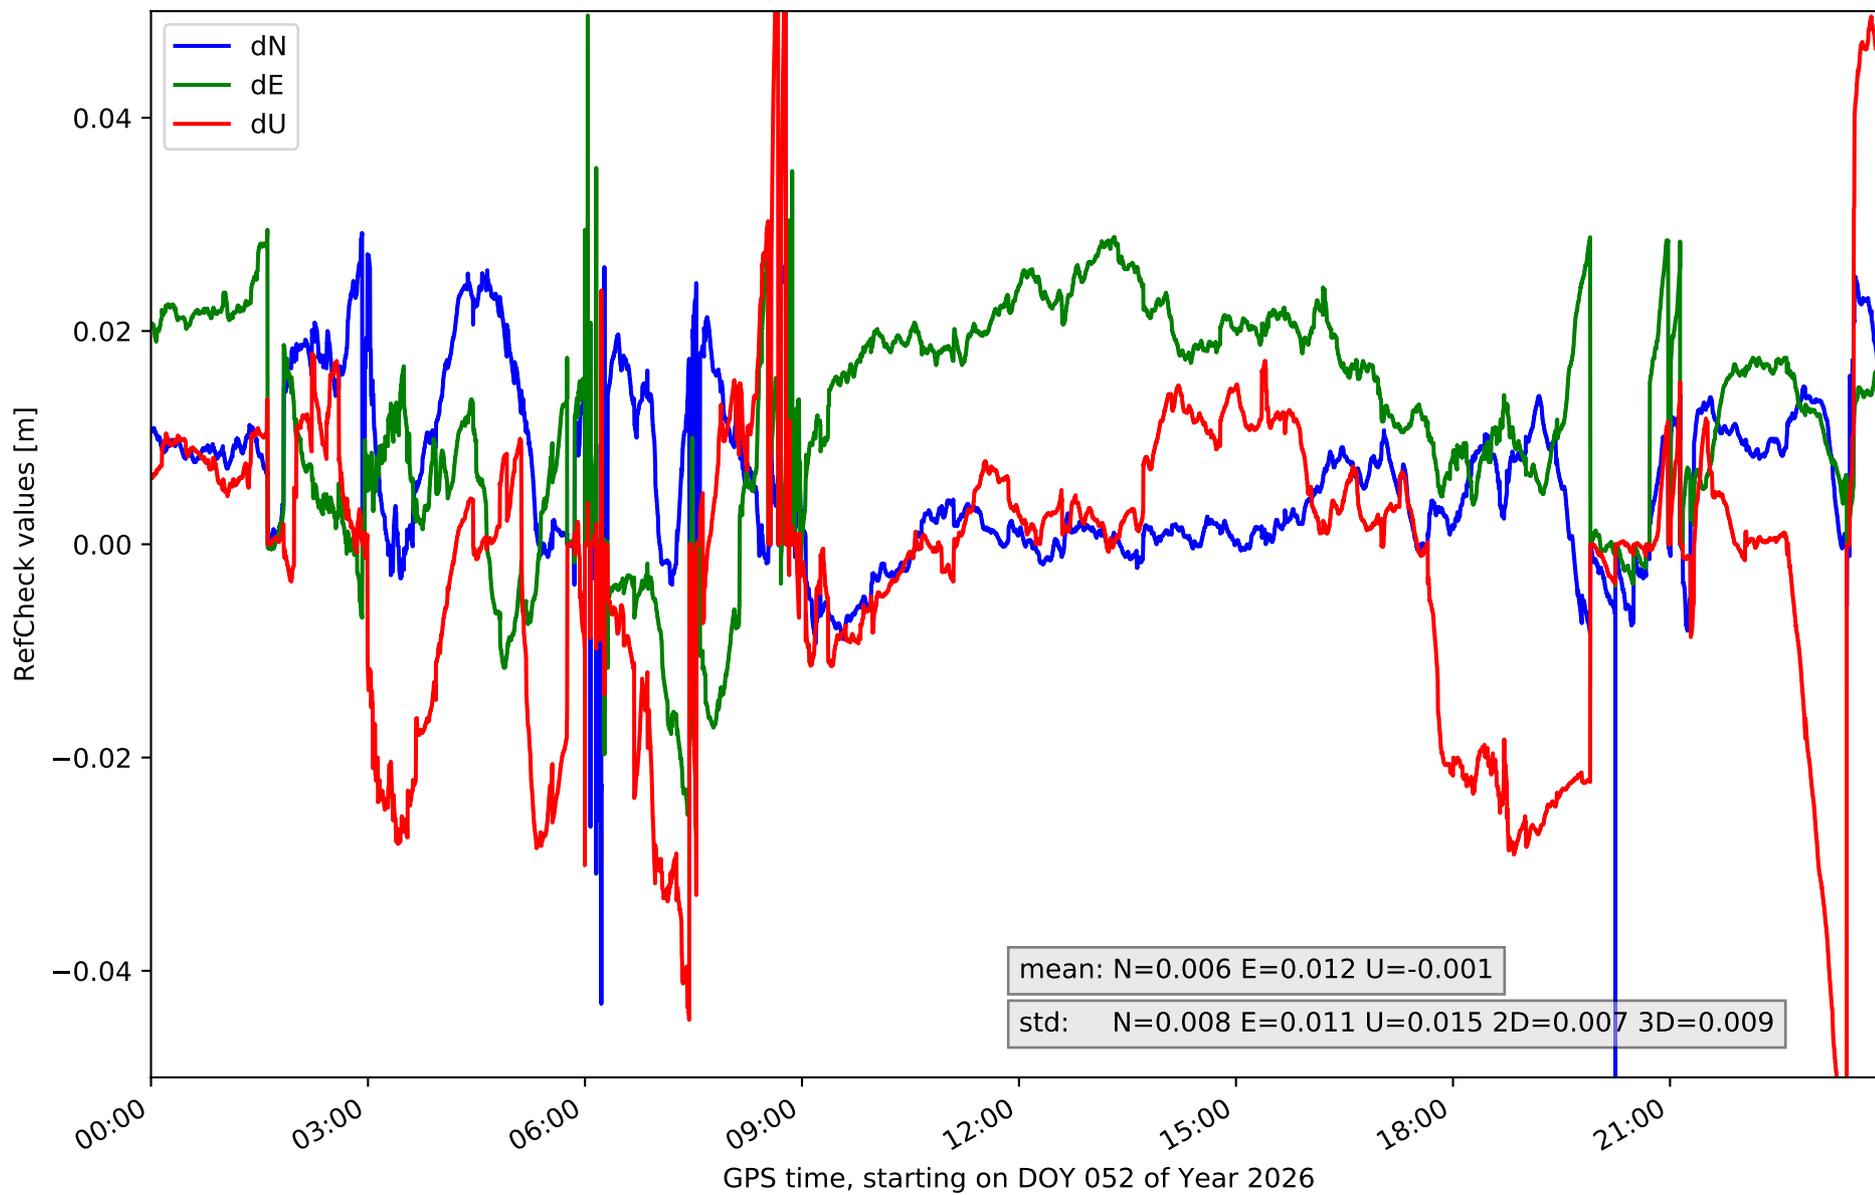

RefCheck for station ULP2 in network N31T

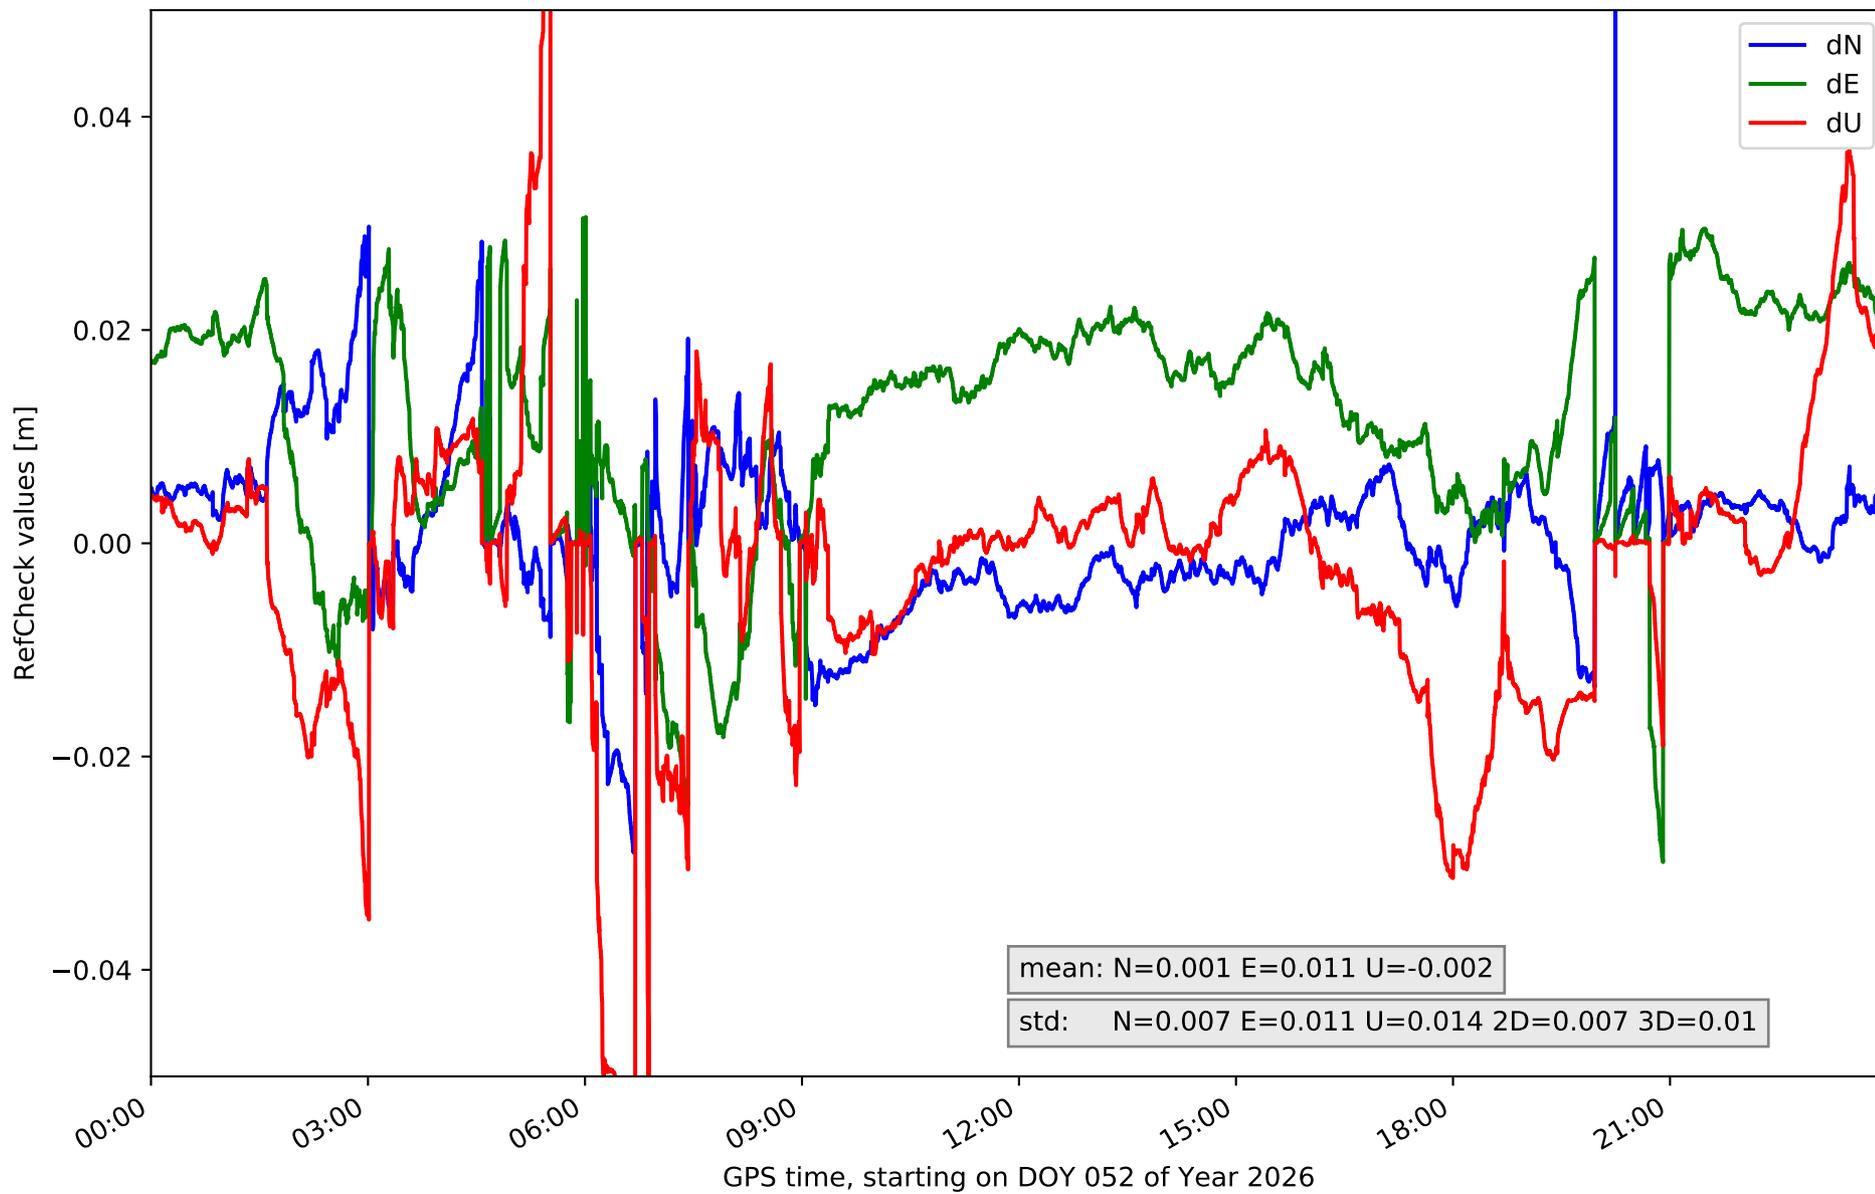

## RefCheck values for network N31T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
FUER	-0.023	0.017	0.006	-0.027	0.019	0.008	-0.05	0.061	0.016	0.006	0.011	29393	35.1	21150	25.2
LALA	-0.021	0.017	0.006	-0.023	0.026	0.009	-0.042	0.042	0.016	0.006	0.012	29305	35.0	25036	29.9
LZ01	-0.027	0.017	0.007	-0.03	0.007	0.006	-0.06	0.019	0.011	0.006	0.007	80805	96.4	66417	79.2
LZ02	-0.026	0.008	0.005	-0.031	0.008	0.006	-0.02	0.028	0.008	0.005	0.006	76407	91.1	39157	46.7
LZ03	-0.021	0.022	0.007	-0.045	0.007	0.006	-0.059	0.024	0.013	0.006	0.009	75229	89.7	49685	59.3
MASP	-0.052	0.029	0.008	-0.025	0.05	0.011	-0.062	0.06	0.015	0.007	0.009	70280	83.8	54189	64.6
ULP2	-0.029	0.051	0.007	-0.03	0.031	0.011	-0.06	0.064	0.014	0.007	0.01	65212	77.8	39057	46.6
<b>Mean</b>	<b>-0.028</b>	<b>0.023</b>	<b>0.007</b>	<b>-0.03</b>	<b>0.021</b>	<b>0.008</b>	<b>-0.05</b>	<b>0.043</b>	<b>0.013</b>	<b>0.006</b>	<b>0.009</b>	<b>60947.3</b>	<b>72.7</b>	<b>42098.7</b>	<b>50.2</b>
<b>Min/Max</b>	<b>-0.052</b>	<b>0.051</b>	<b>0.008</b>	<b>-0.045</b>	<b>0.05</b>	<b>0.011</b>	<b>-0.062</b>	<b>0.064</b>	<b>0.016</b>	<b>0.007</b>	<b>0.012</b>	<b>80805</b>	<b>96.4</b>	<b>66417</b>	<b>79.2</b>

fixing statistic for network N31T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	82.9	84.3	80.0	84.1	80.1
considering satellites with dual-frequency fixed	78.2	79.7	74.5	79.6	77.0
considering all signals separately	78.7	80.1	74.5	80.4	75.9