

## summary for network N32T

timeperiod chosen: from 2026-02-24-00:00:00 until 2026-02-24-23:59:58

average update rate (durations larger than 15 seconds considered as observation gap): 1.5 seconds


average fixing percentage with threshold set to 0.3: 93.6 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: LEICA GR50	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

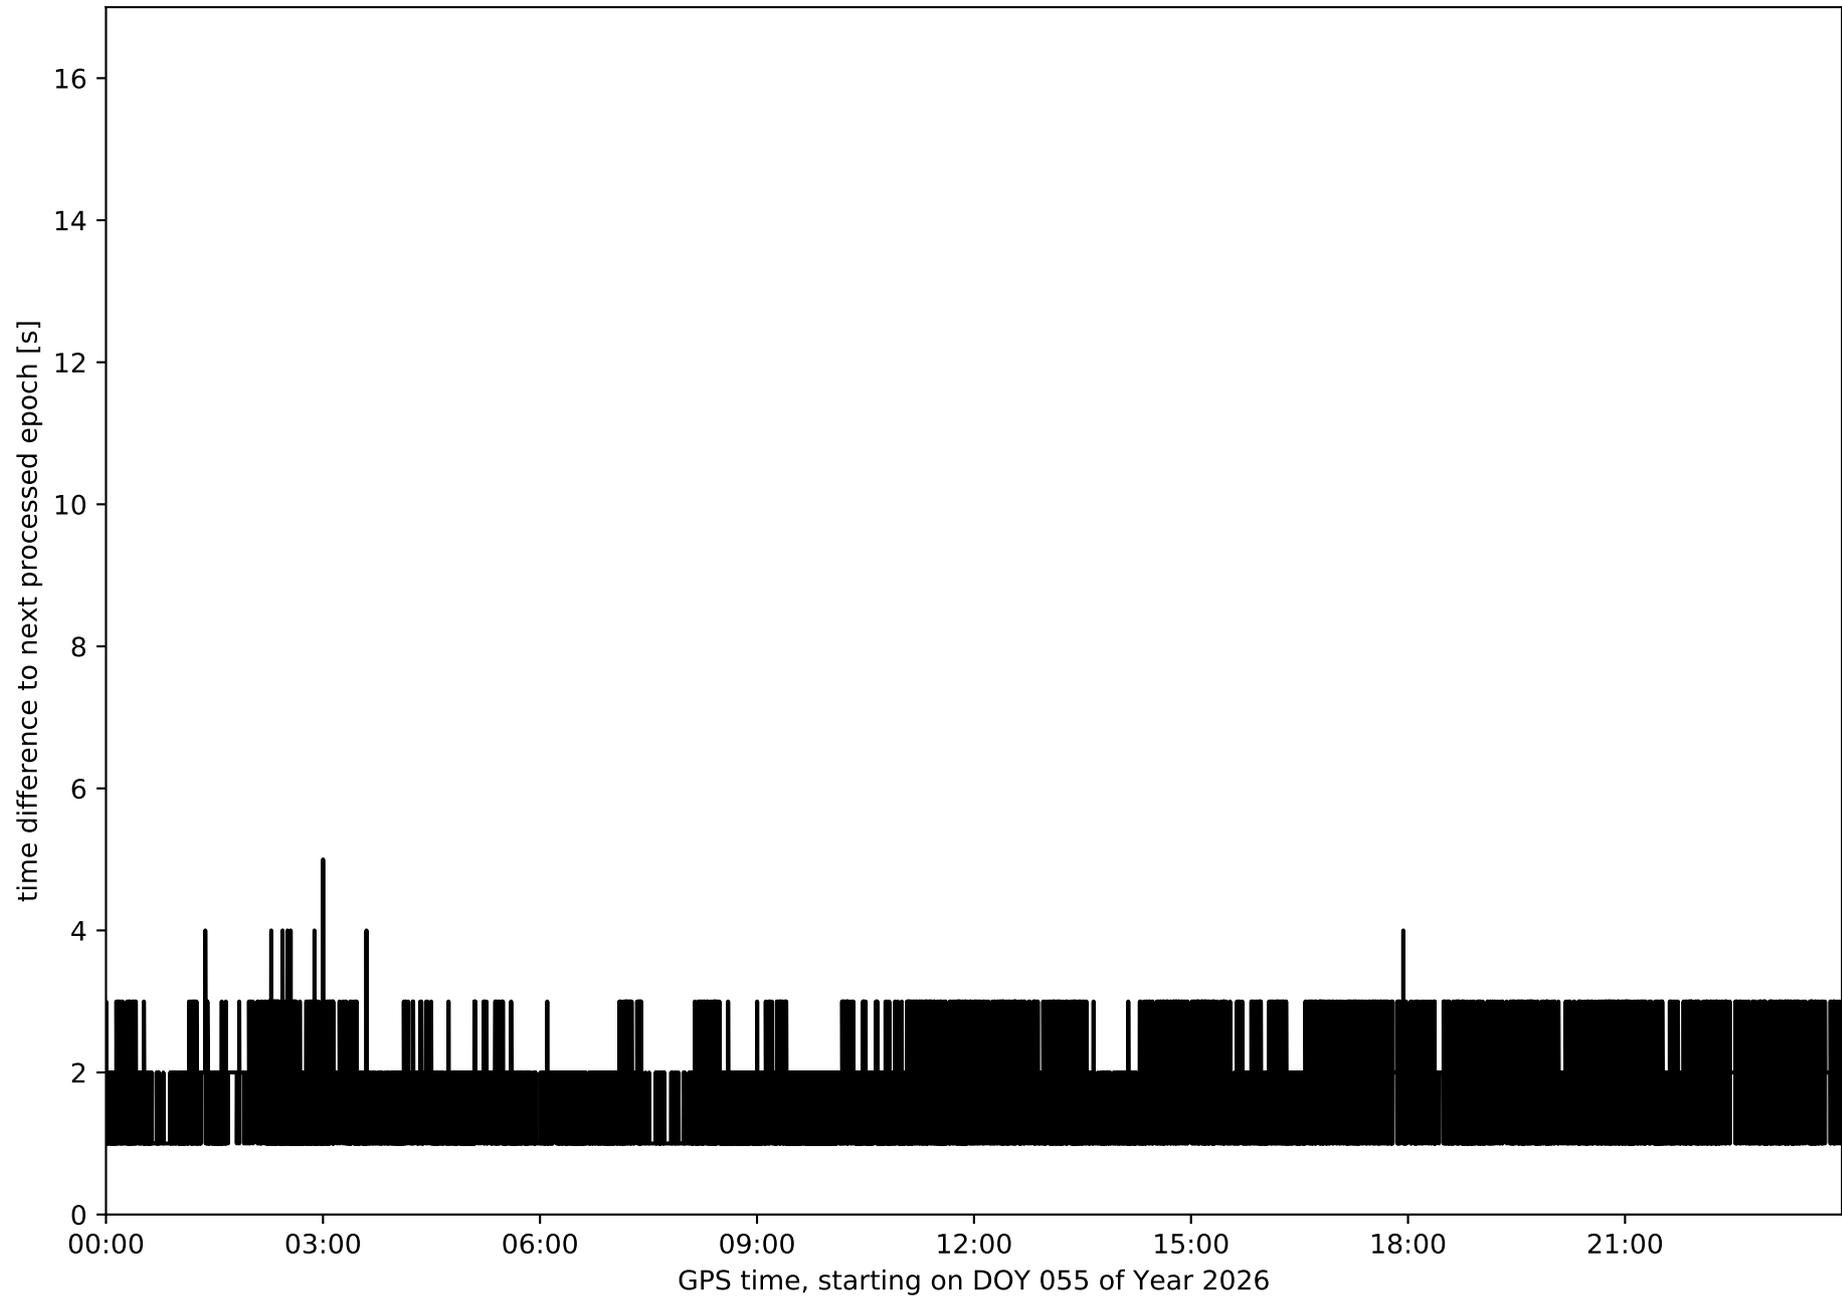


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

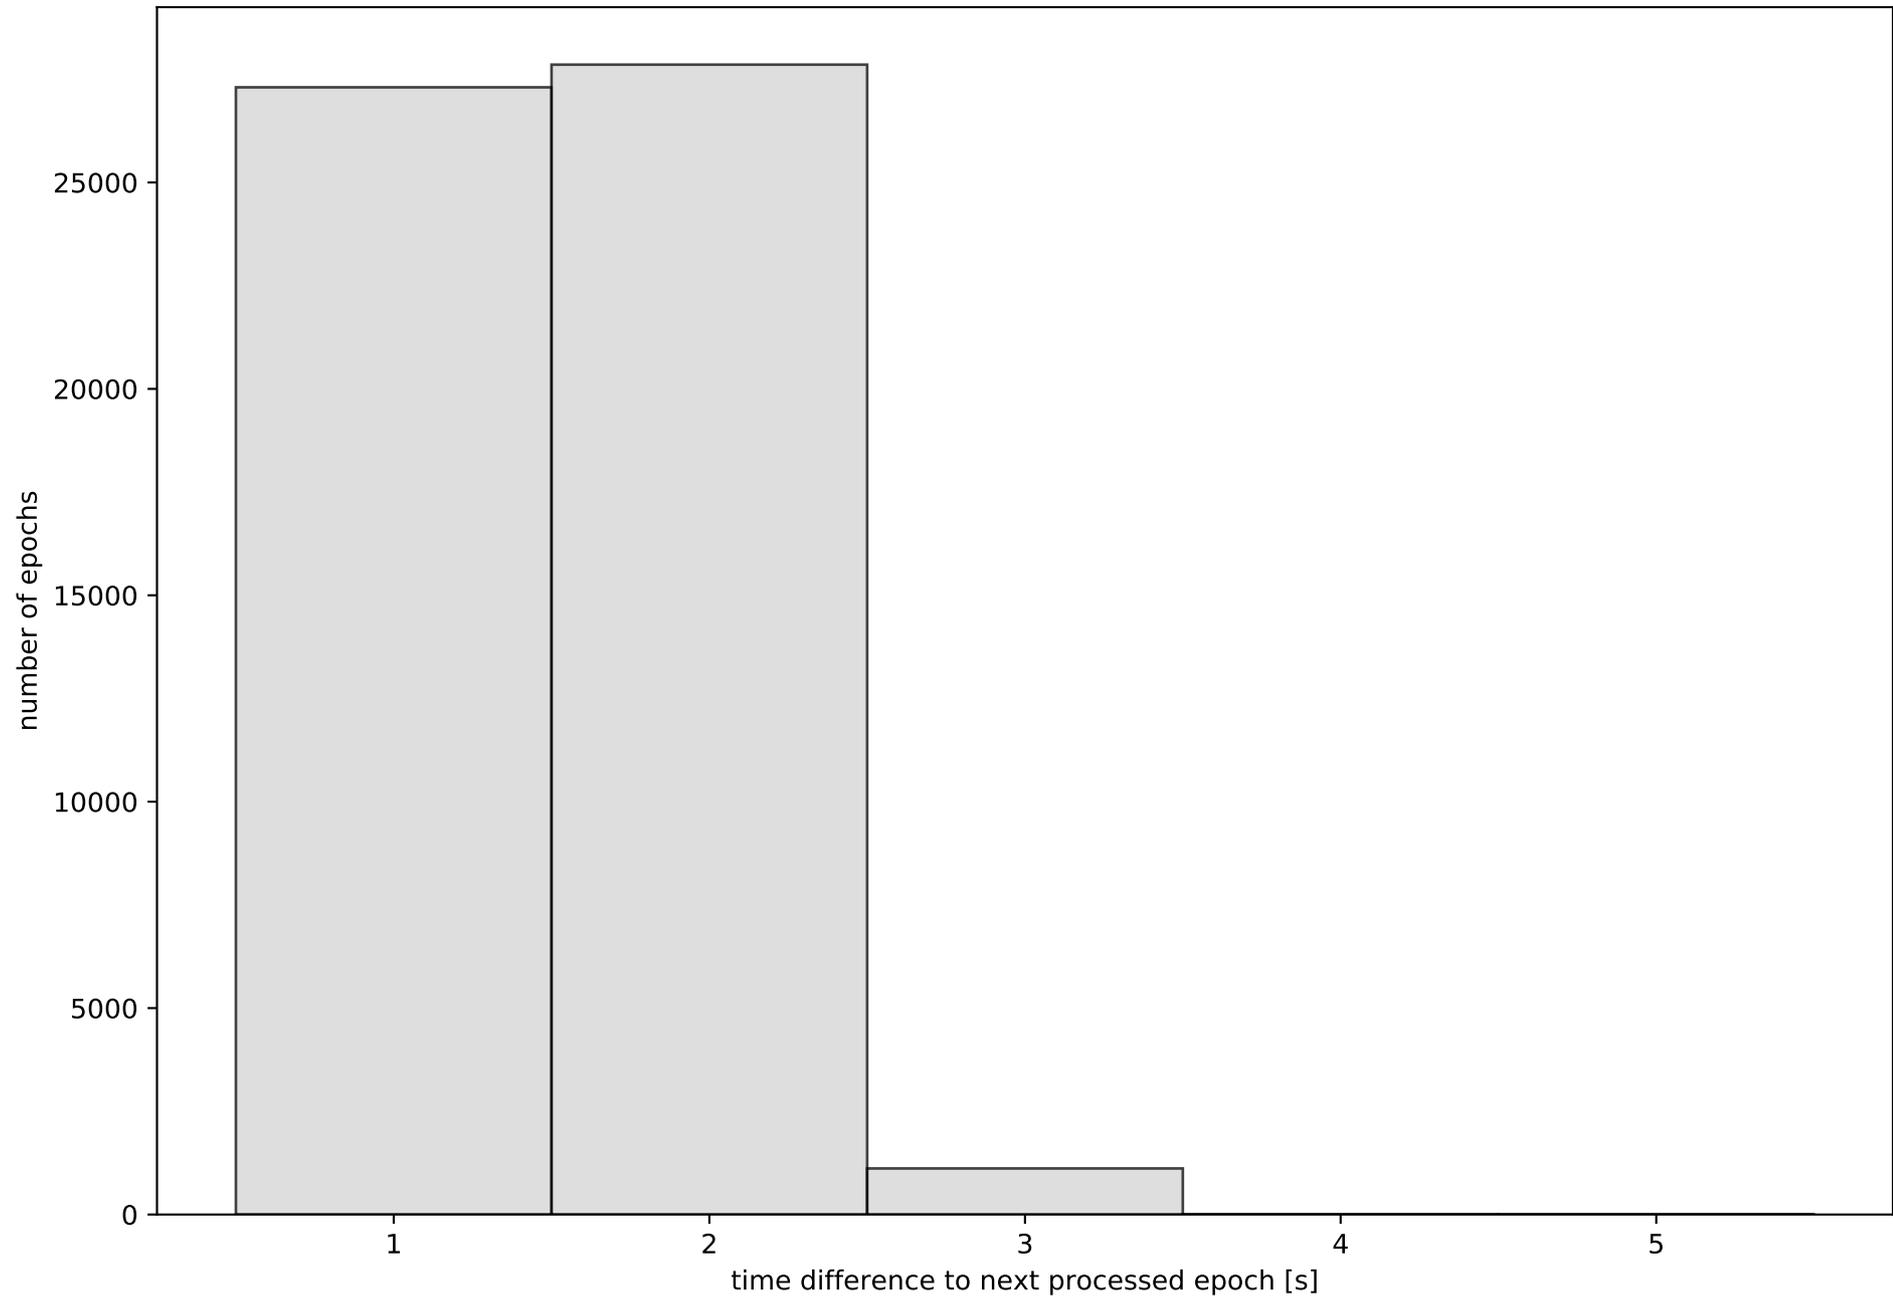


Network N32T with threshold set to 0.3

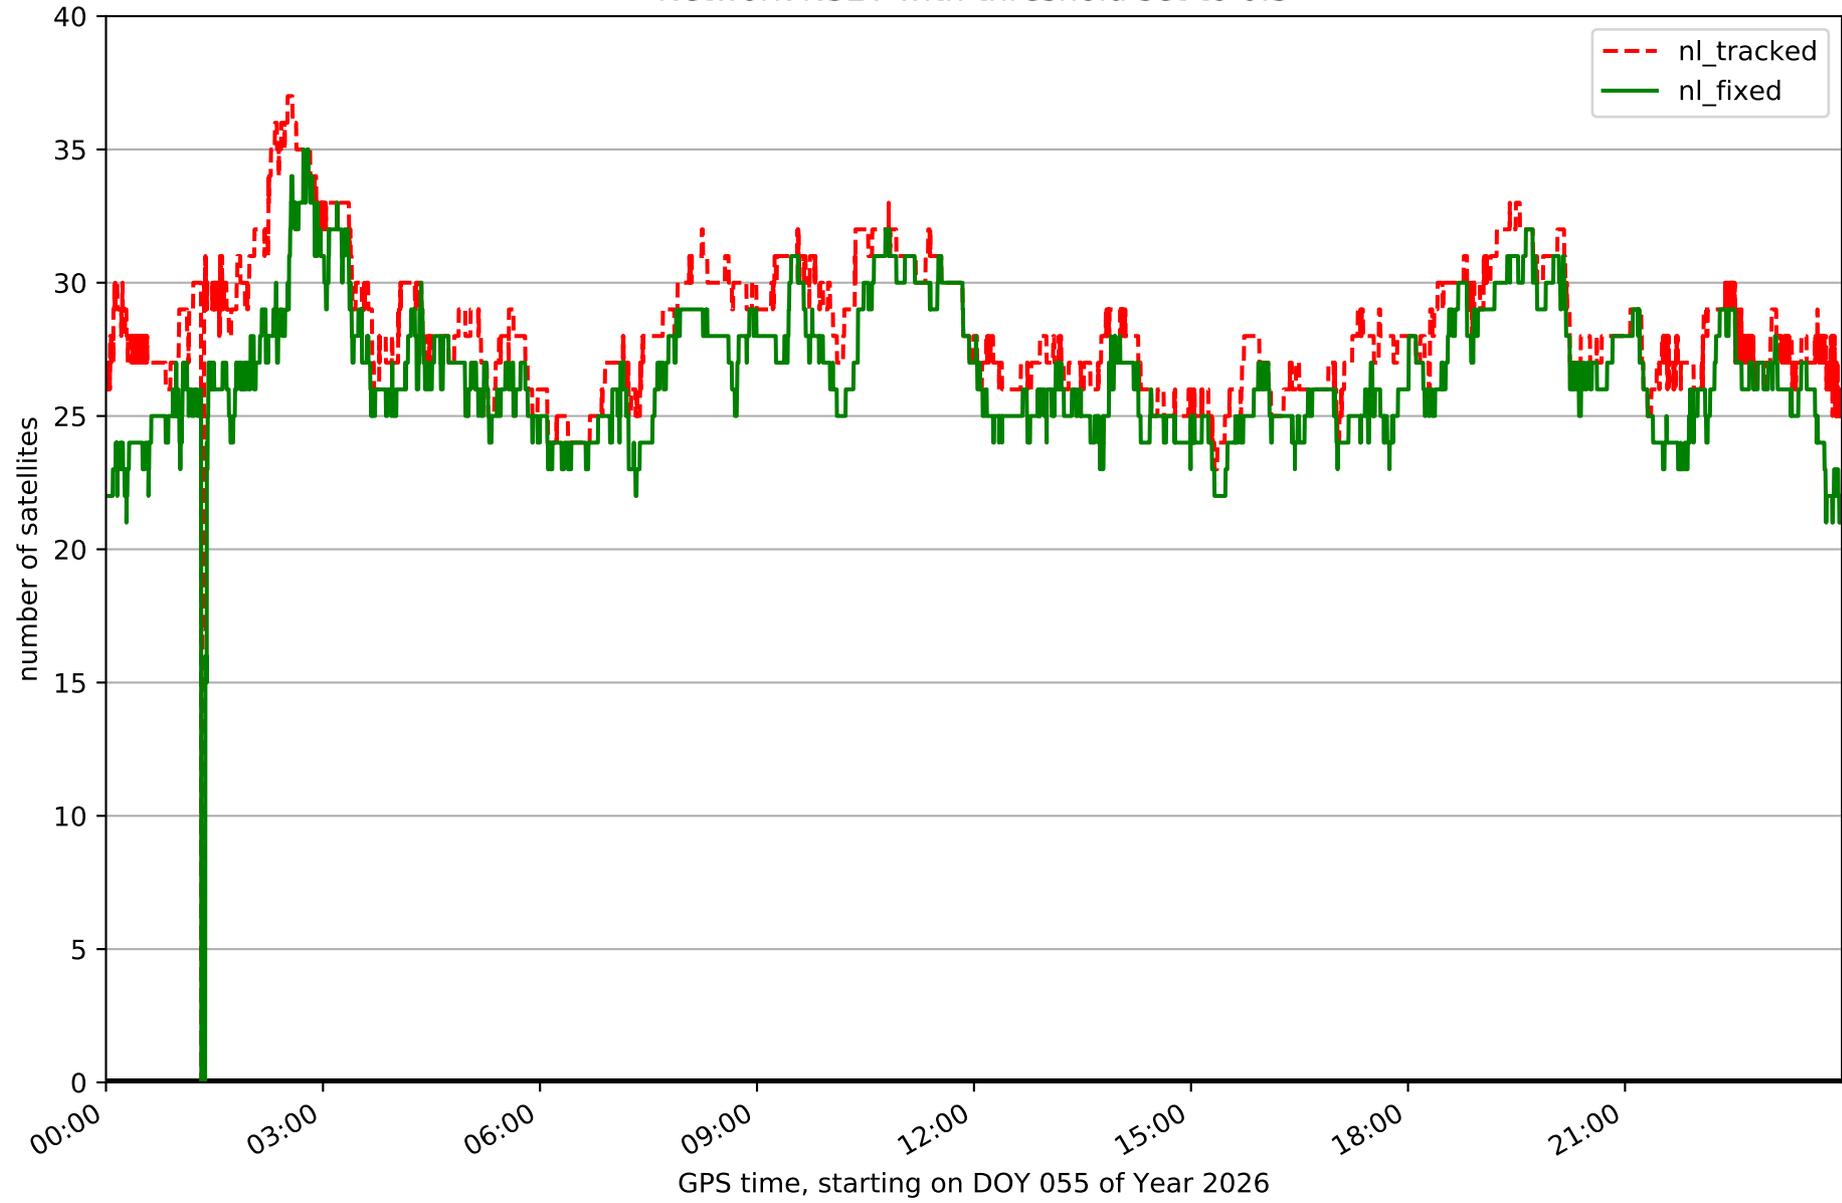


Fixing percentage of satellites in network N32T with threshold set to 0.3

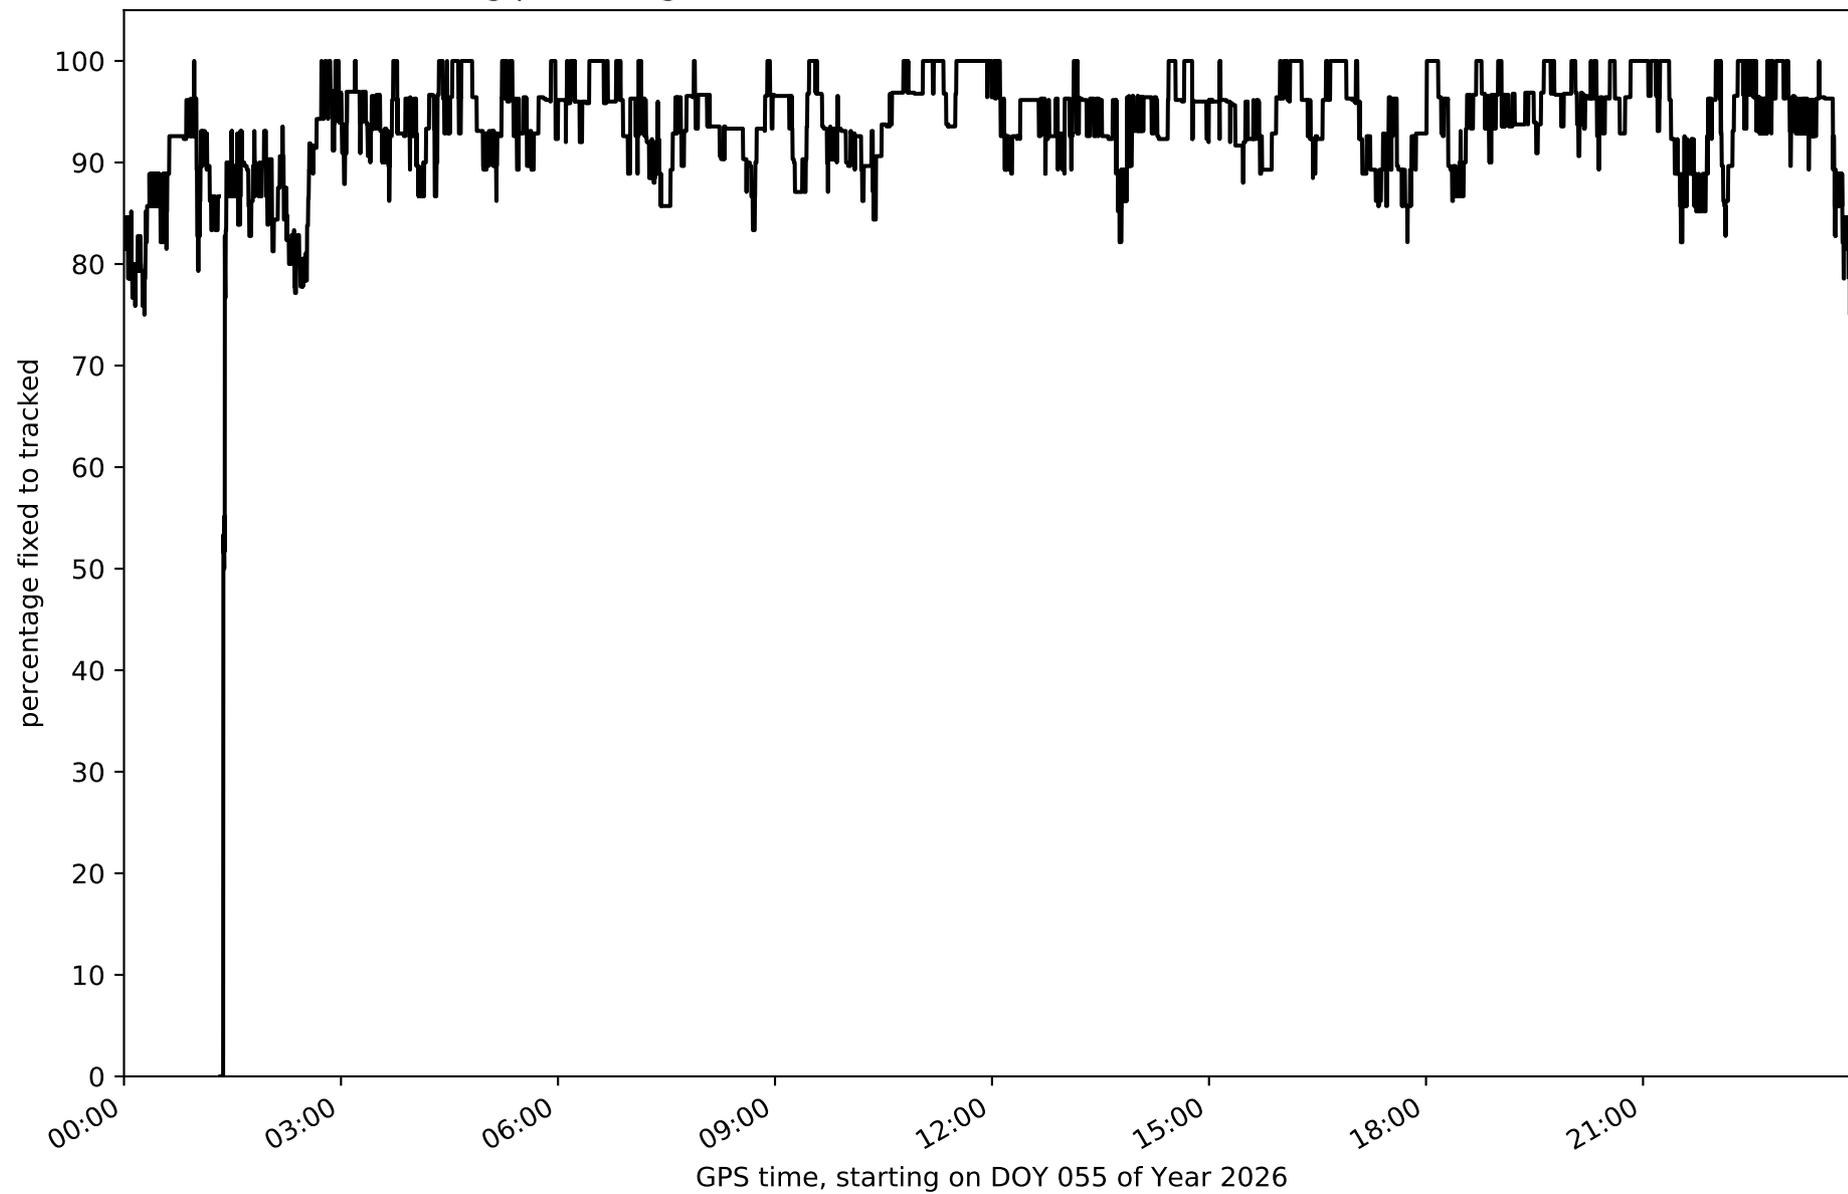


Network N32T - only GPS with threshold set to 0.3

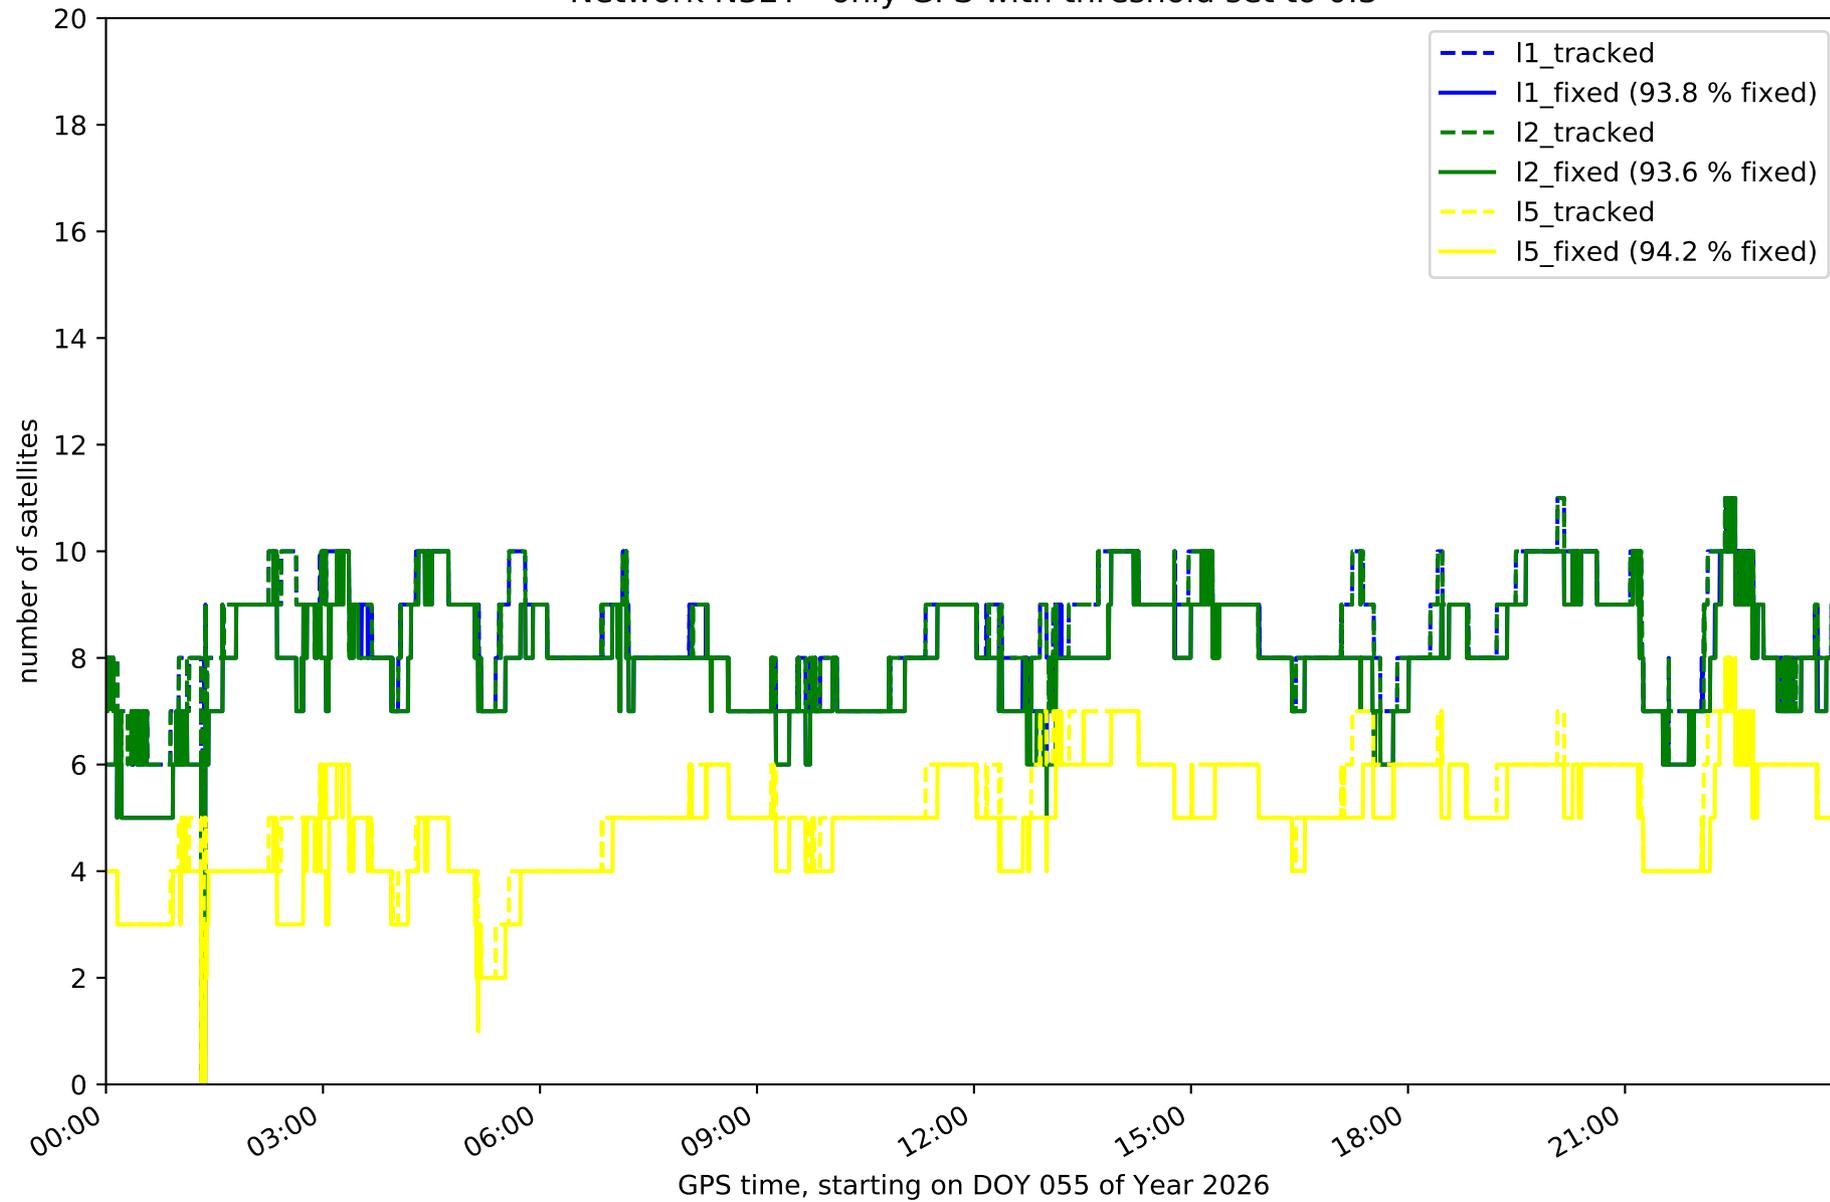


Network N32T - only GLONASS with threshold set to 0.3

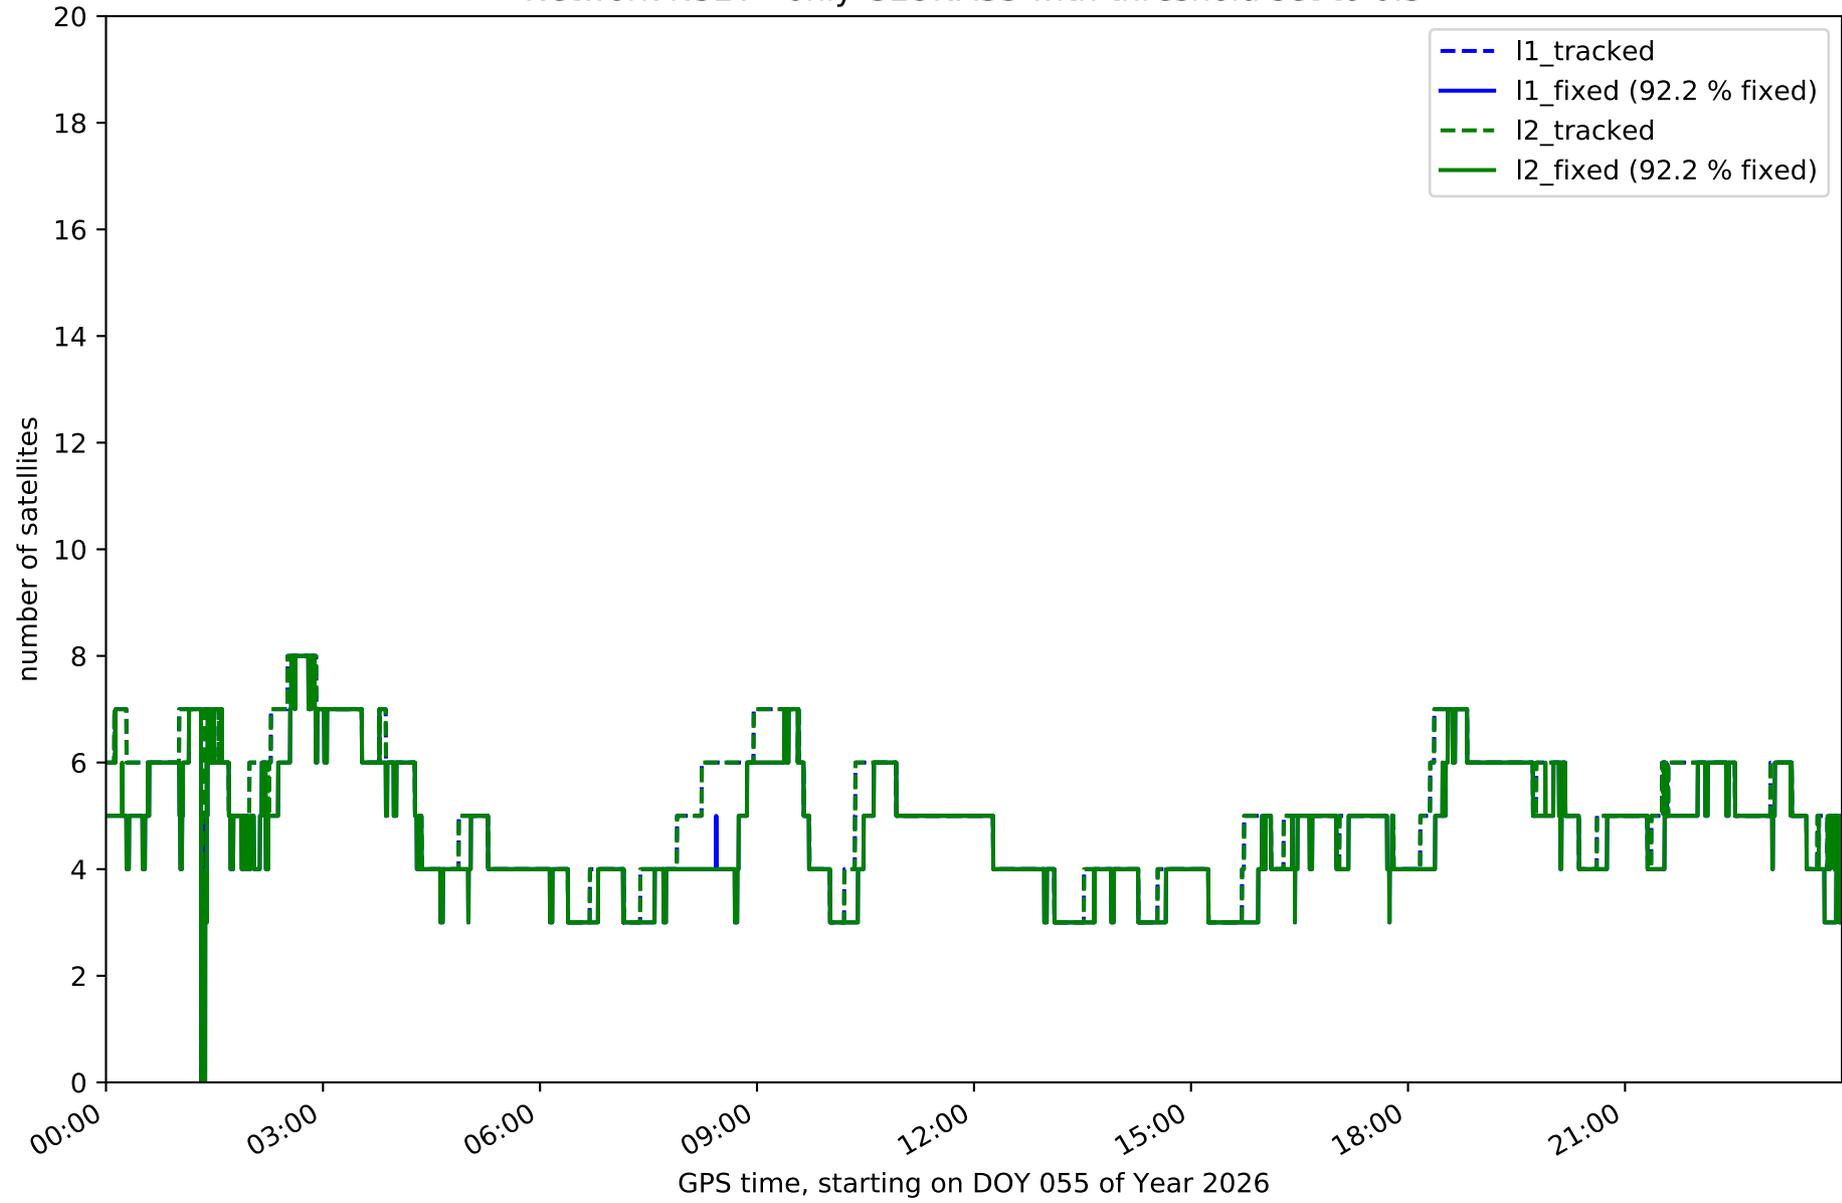


Network N32T - only BDS with threshold set to 0.3

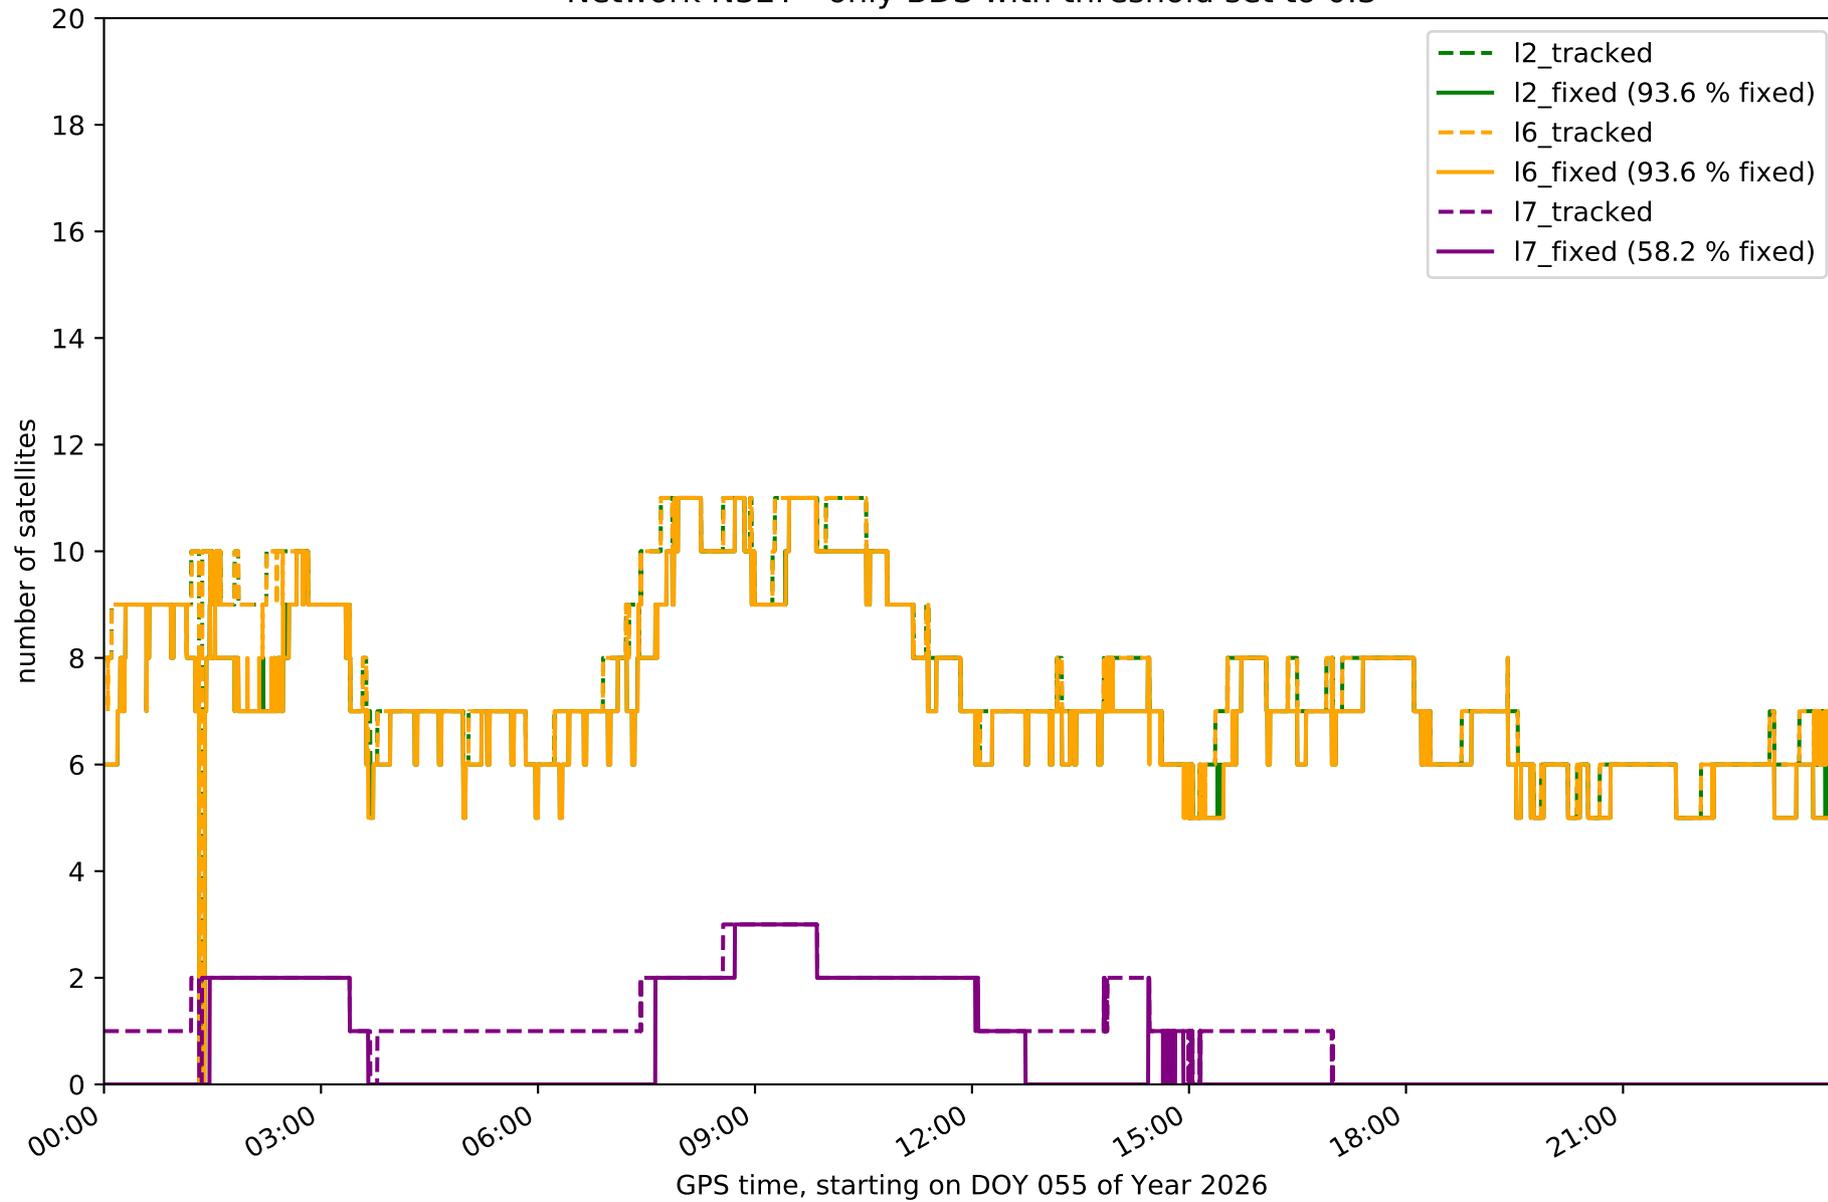


Network N32T - only Galileo with threshold set to 0.3

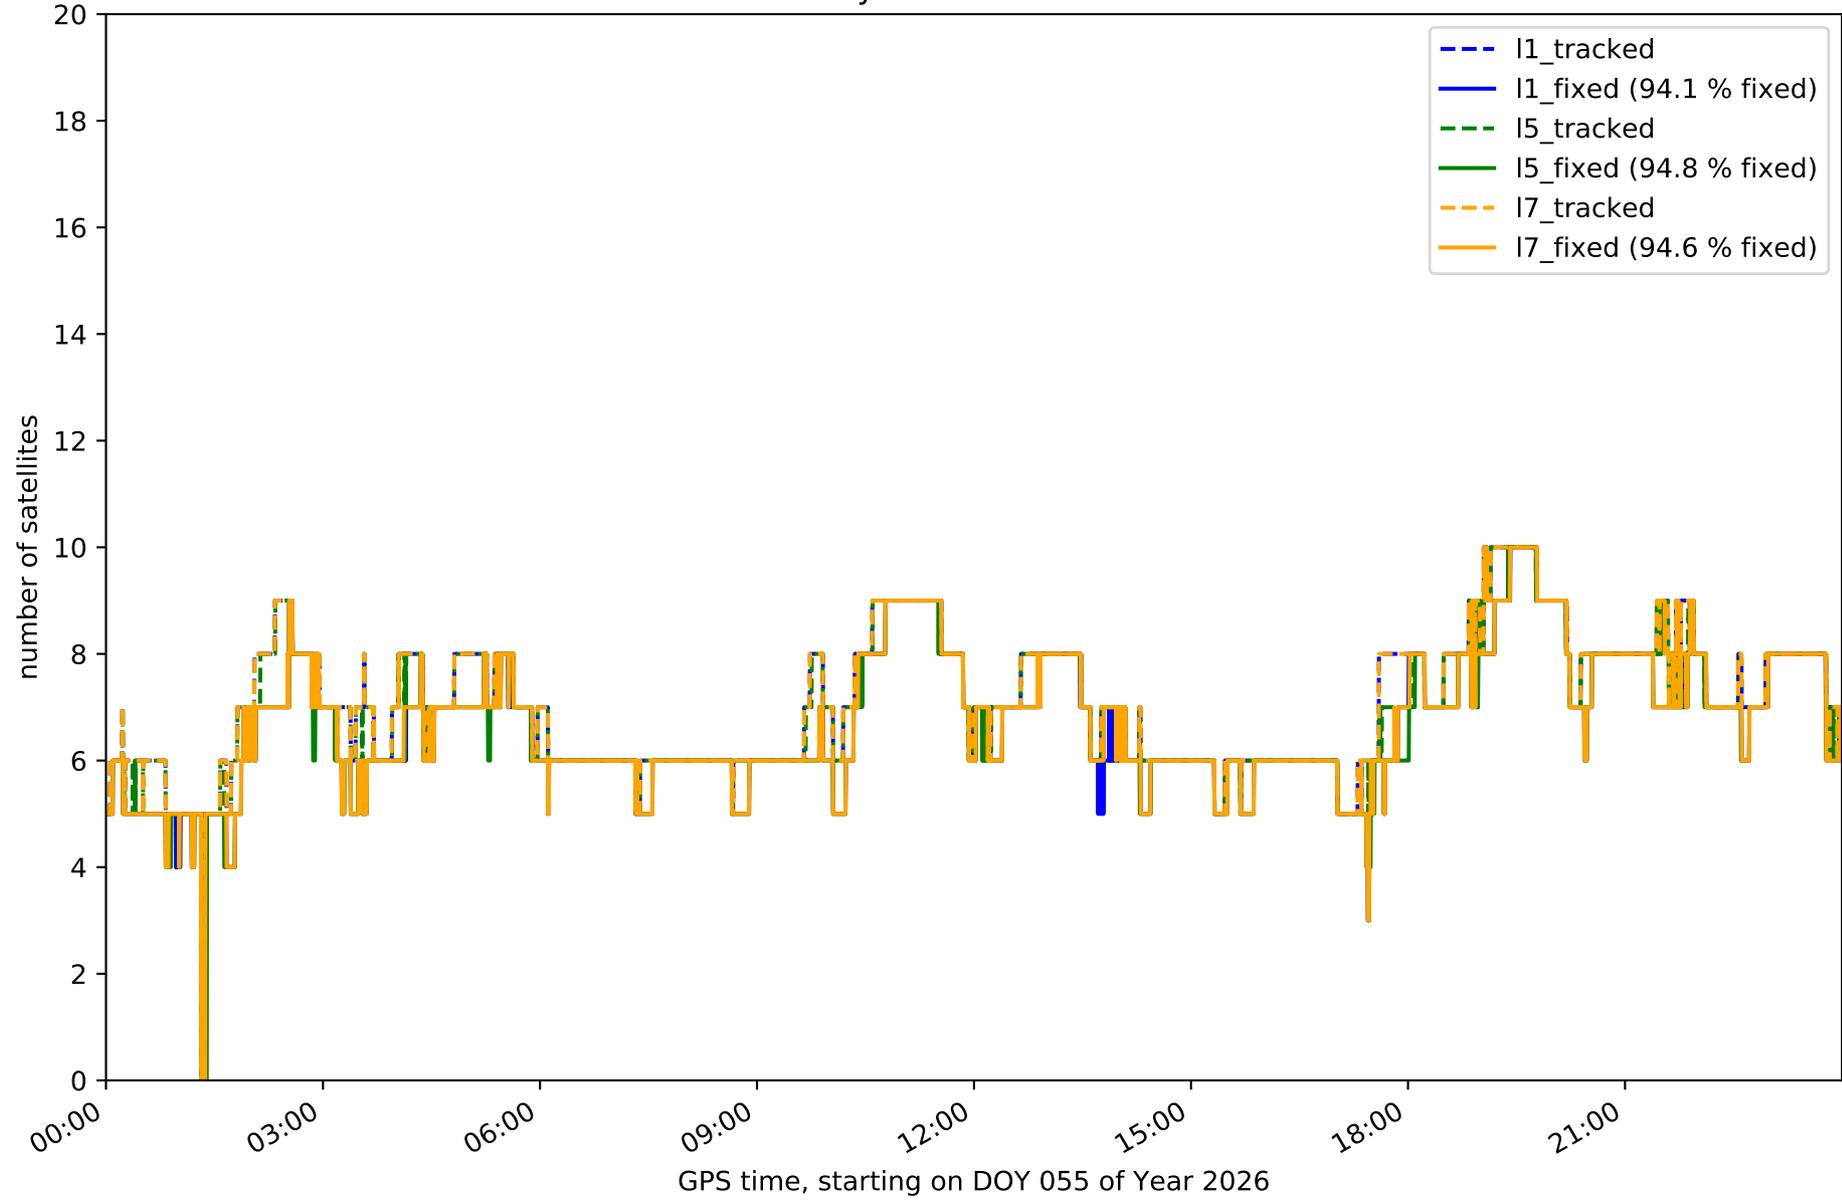


Station EH01 in network N32T

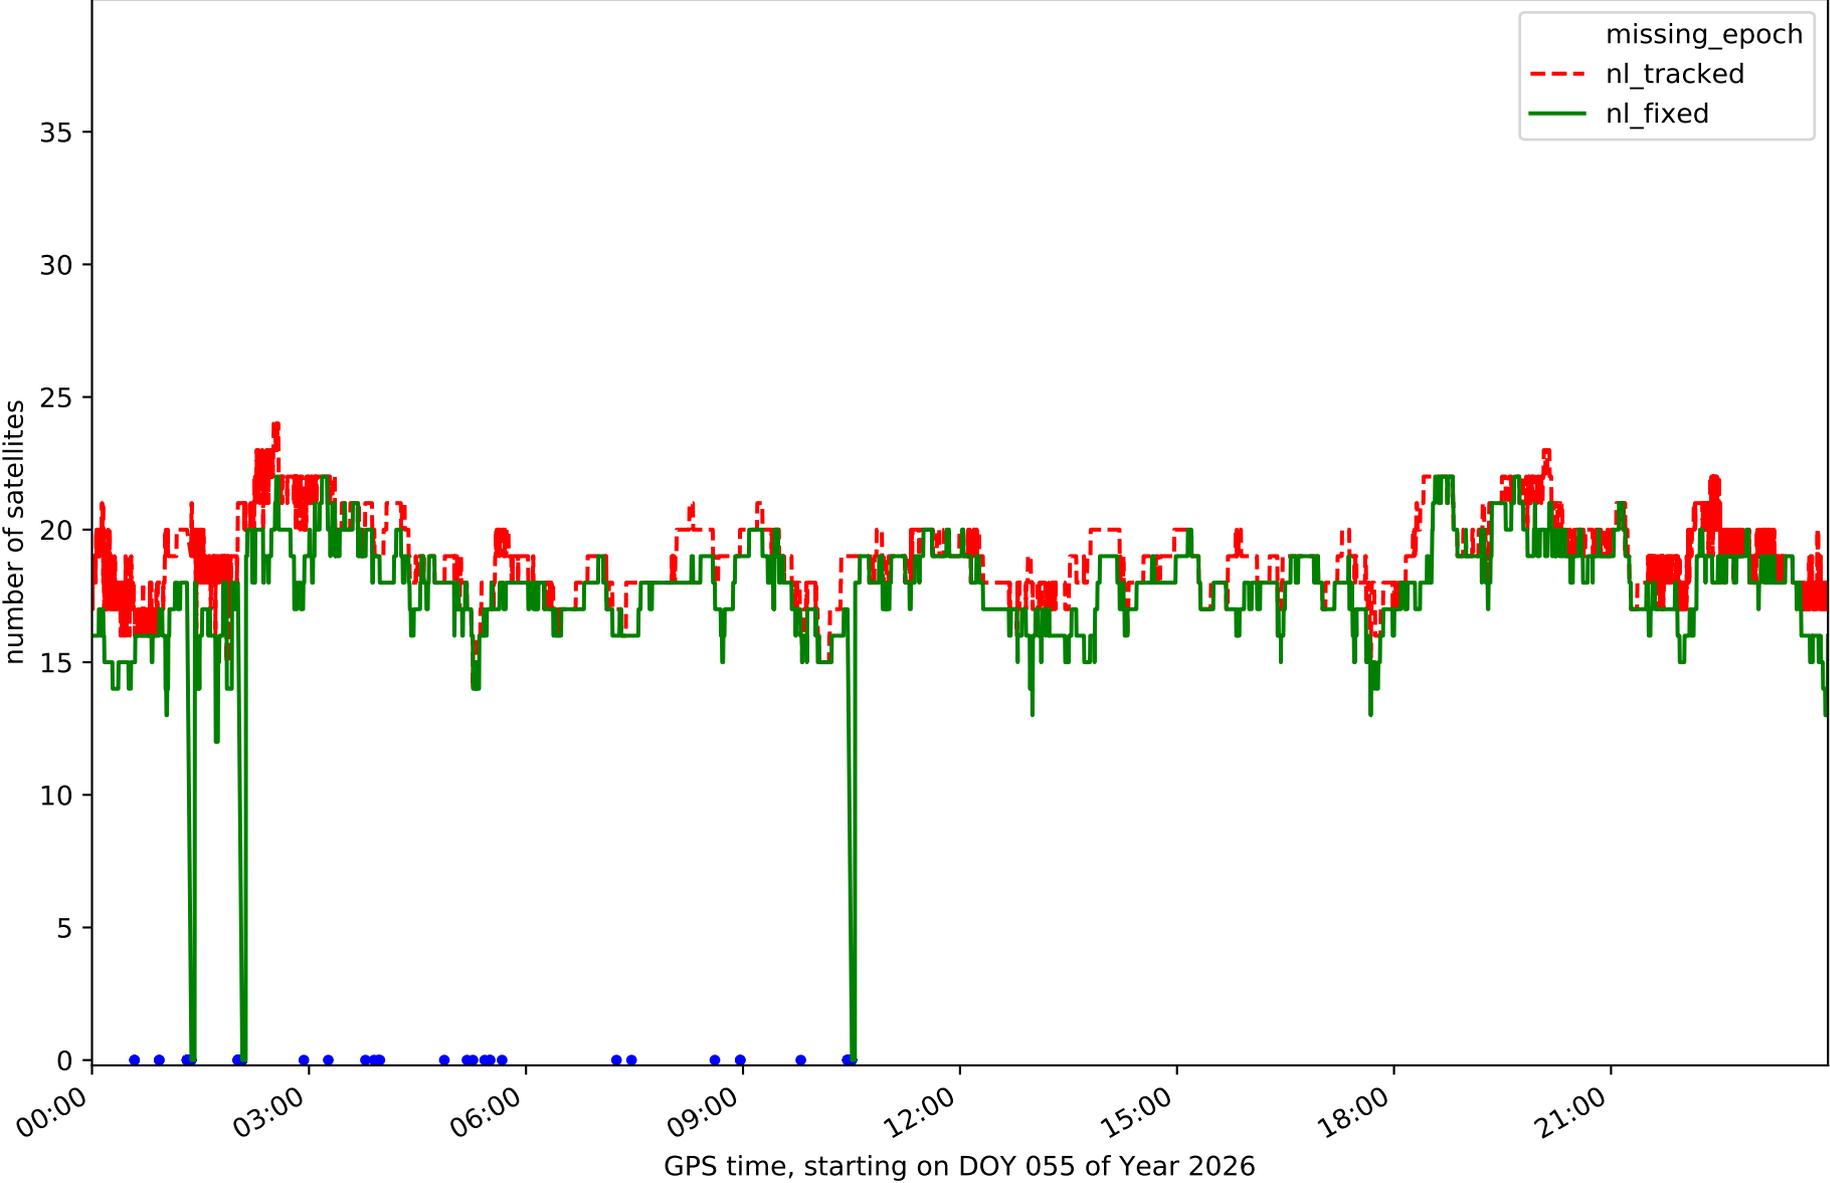


Station EH02 in network N32T

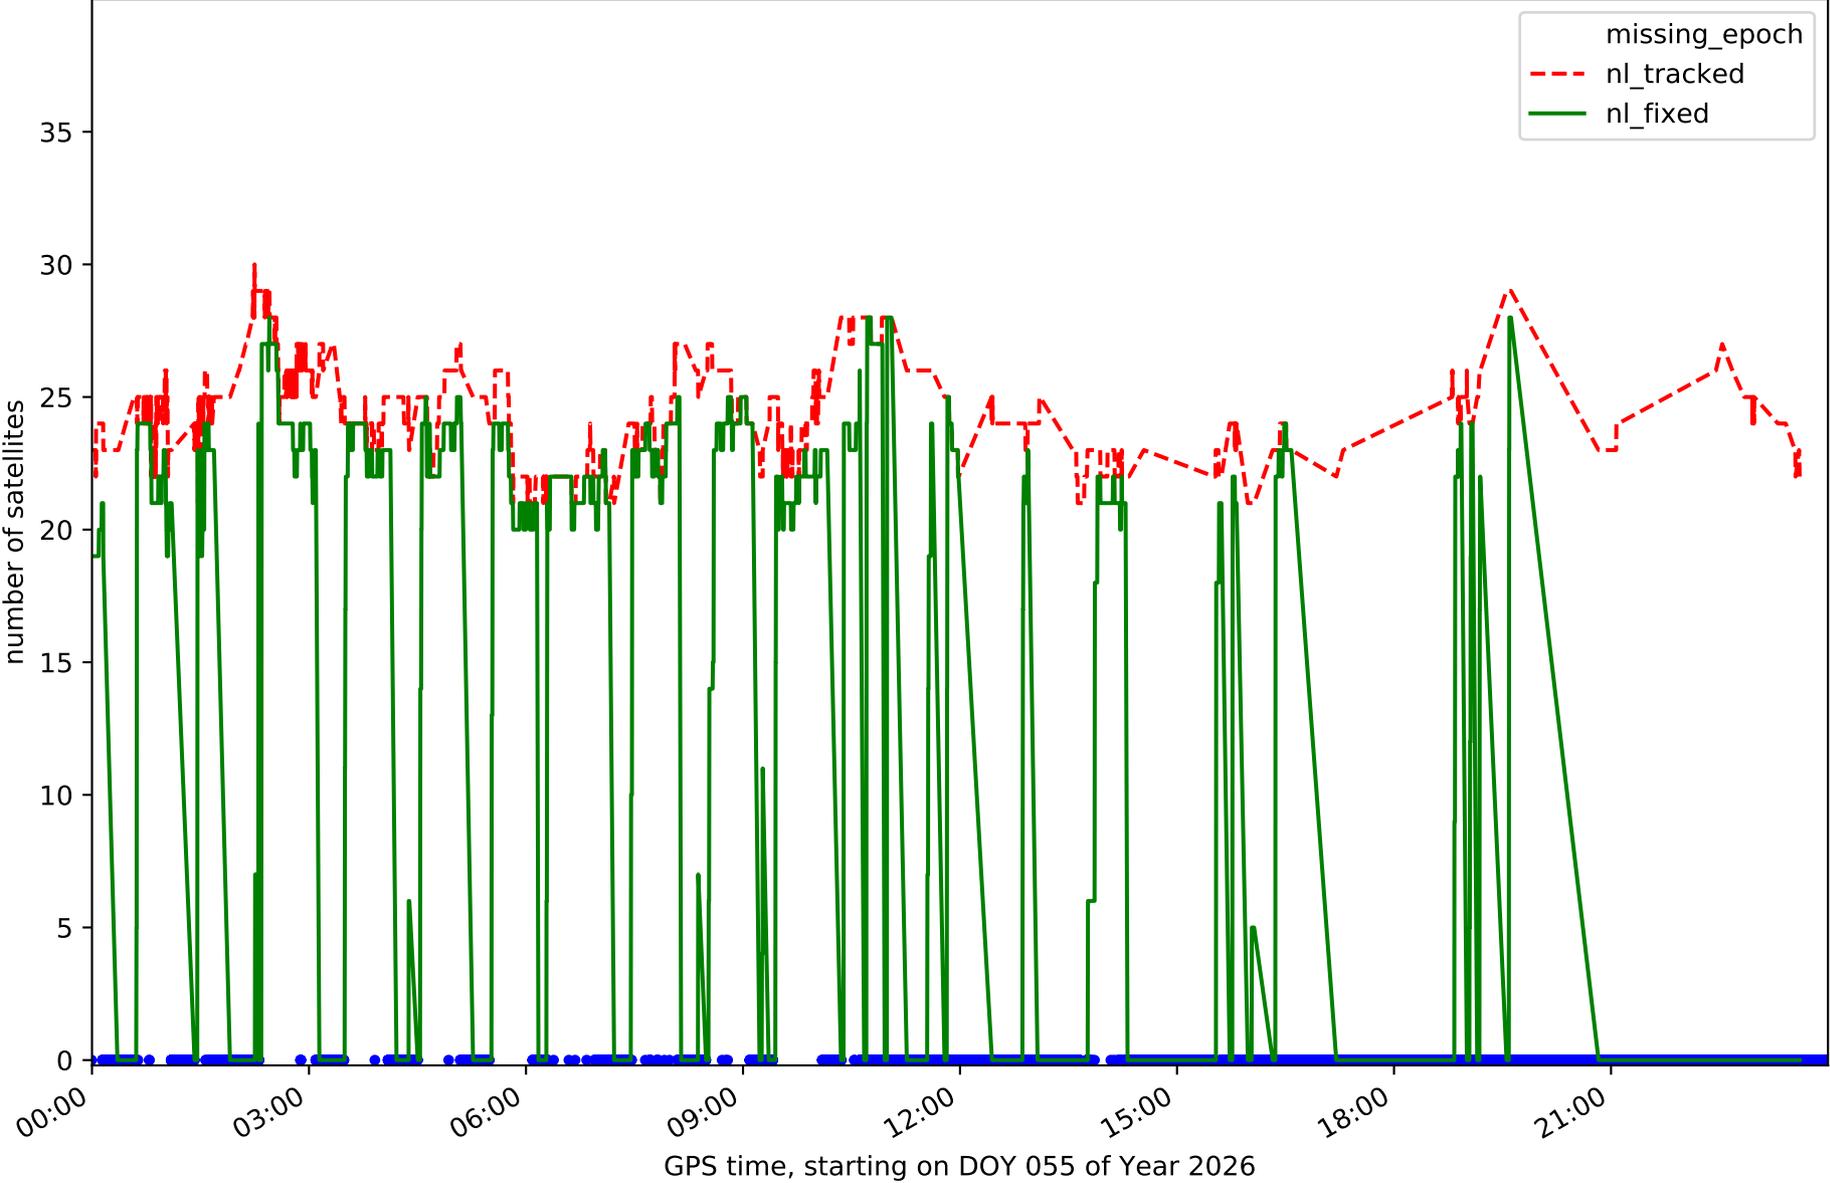


Station GOM1 in network N32T

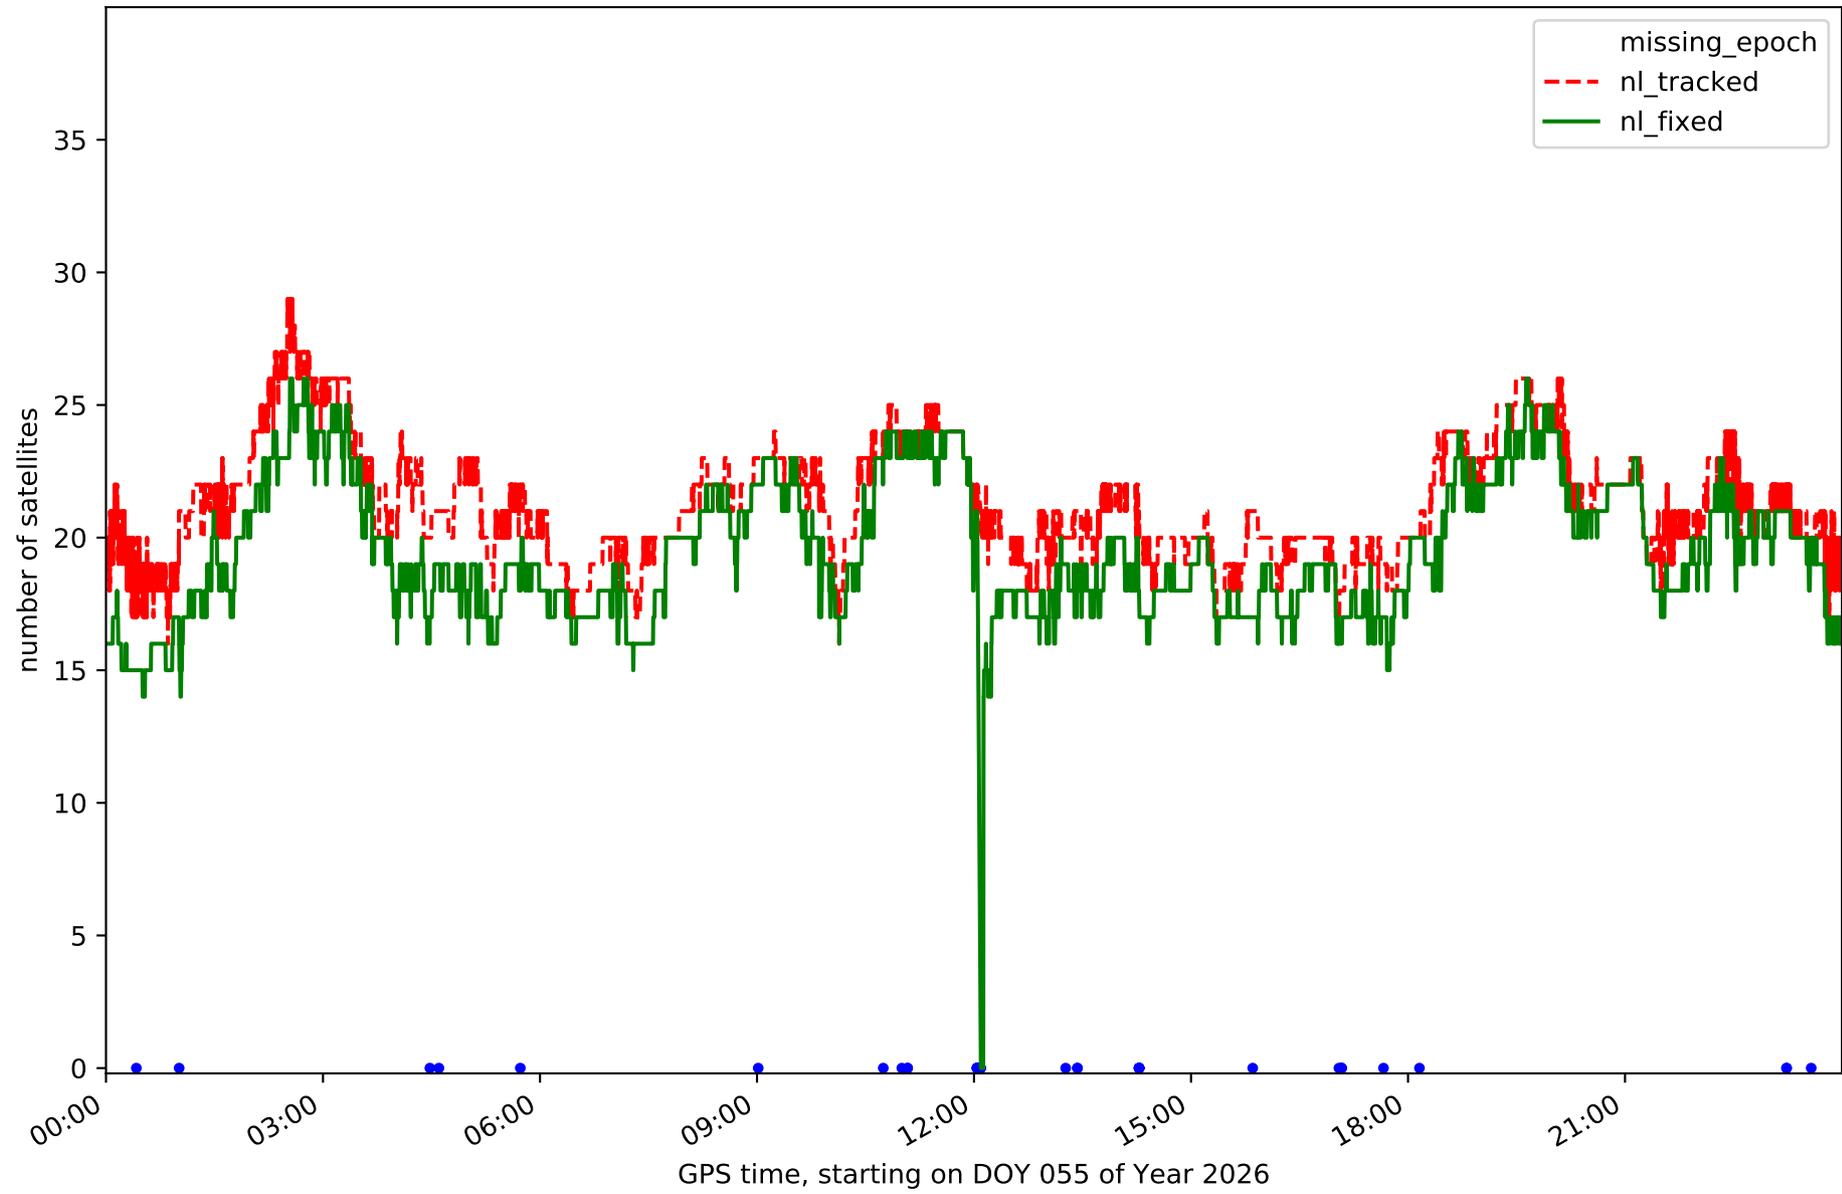


Station GOME in network N32T

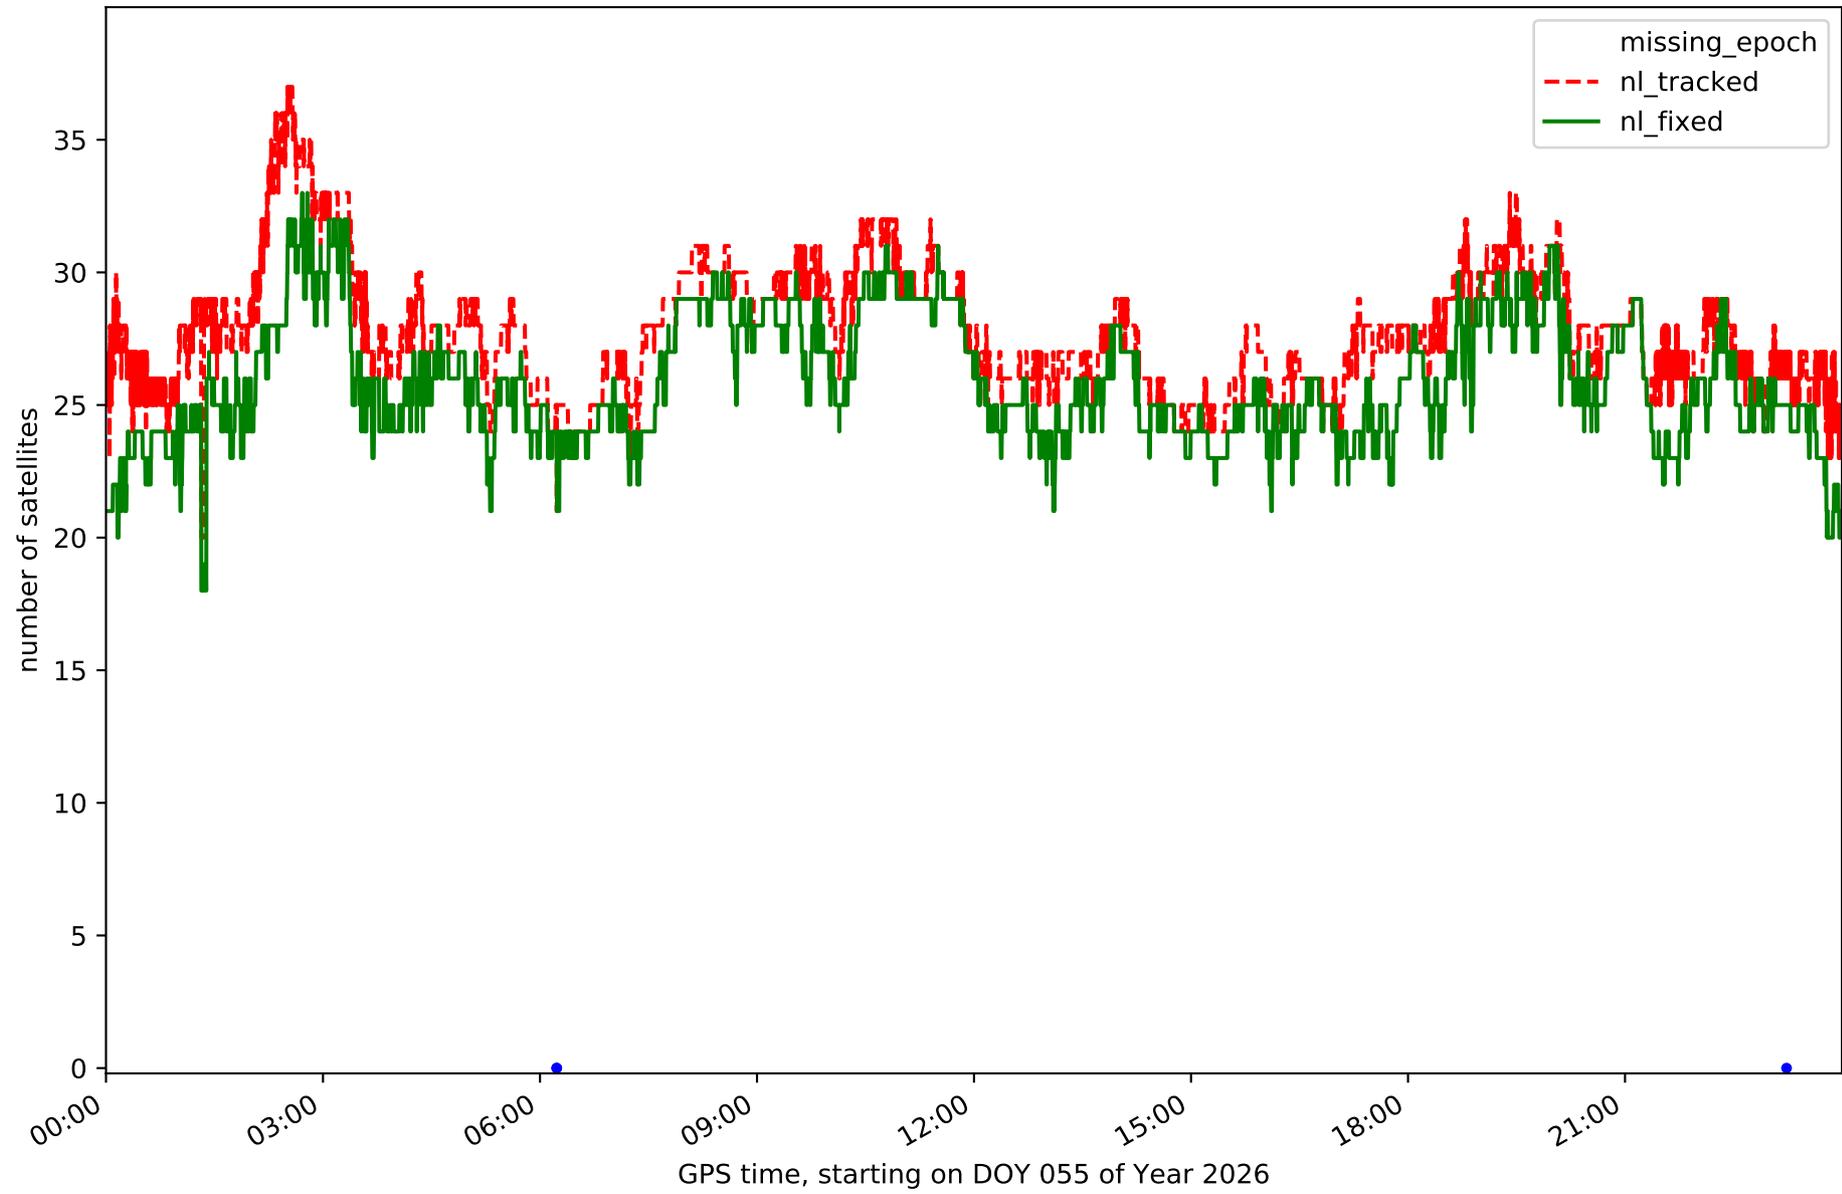


Station IZAN in network N32T

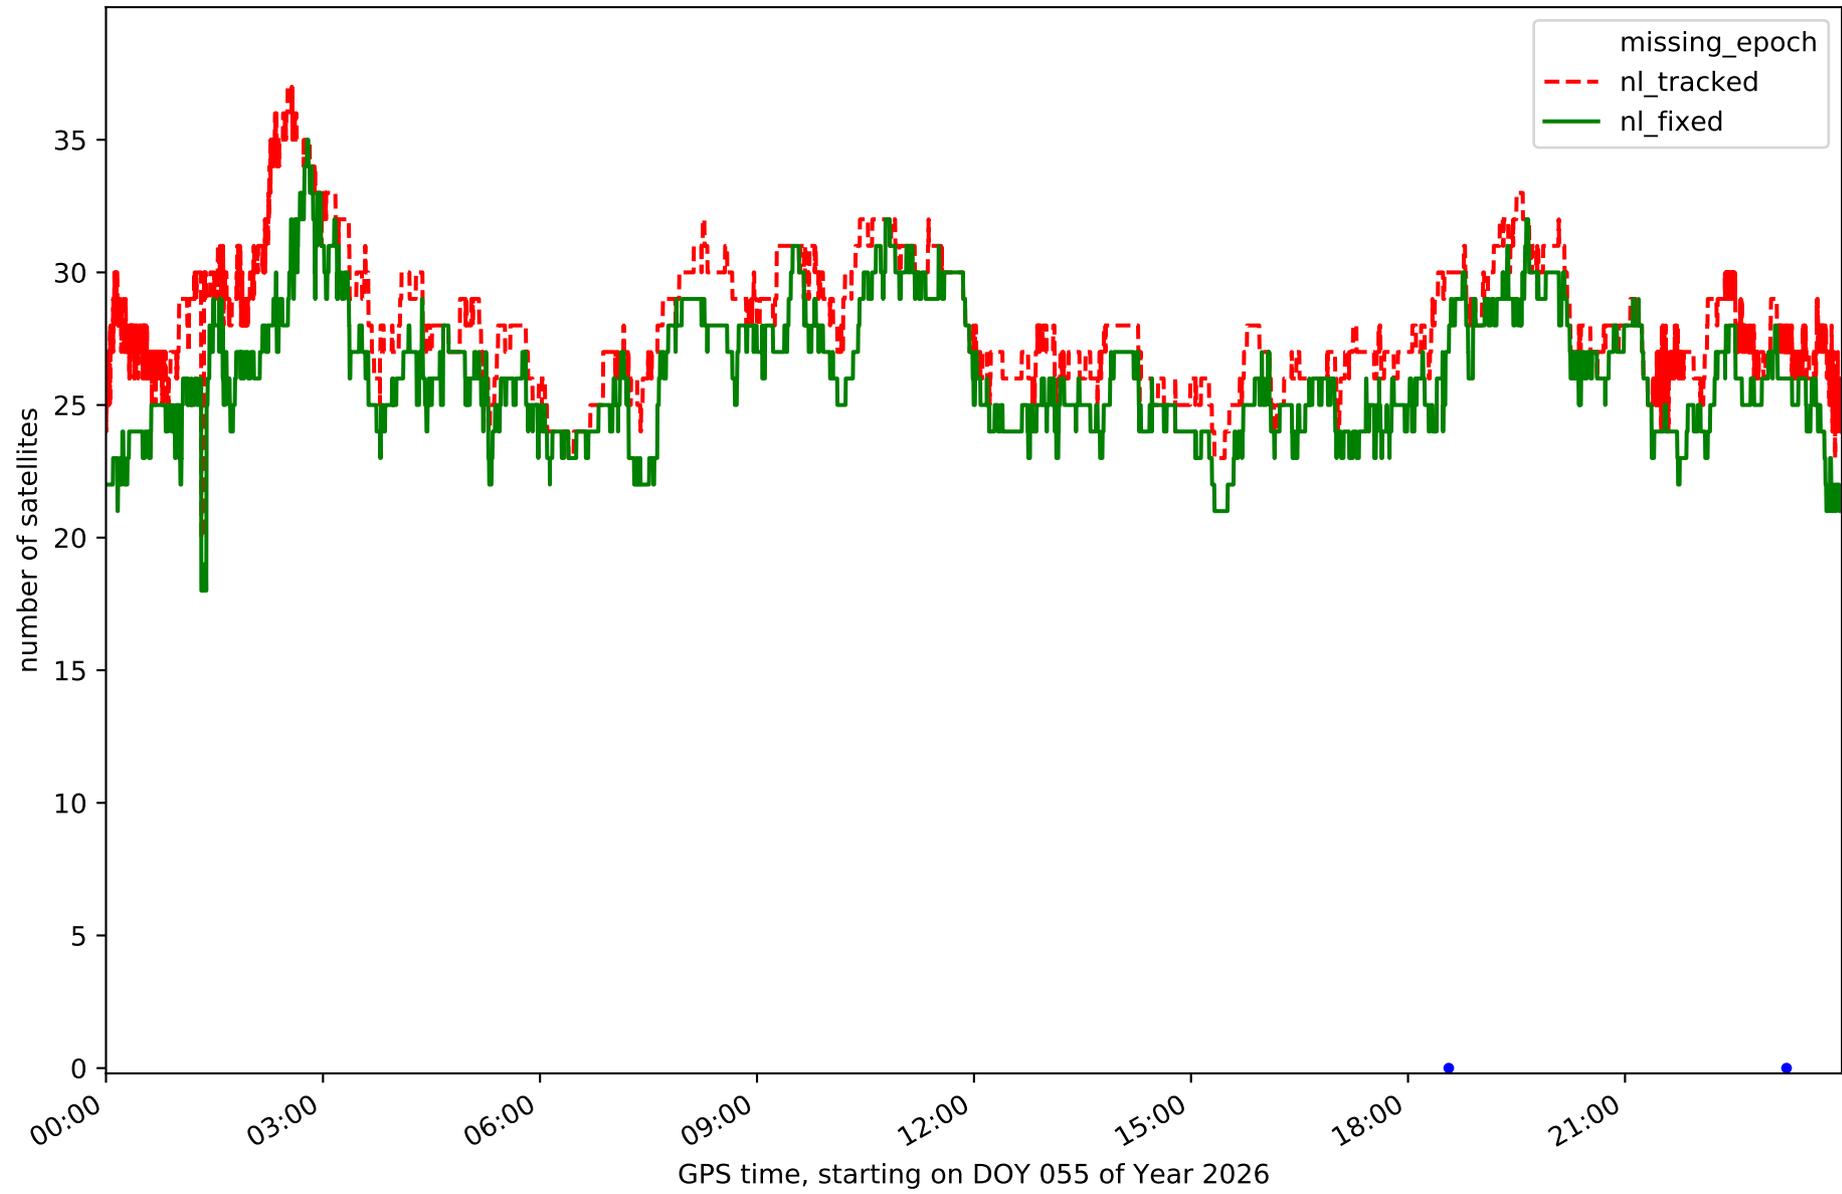


Station LP01 in network N32T

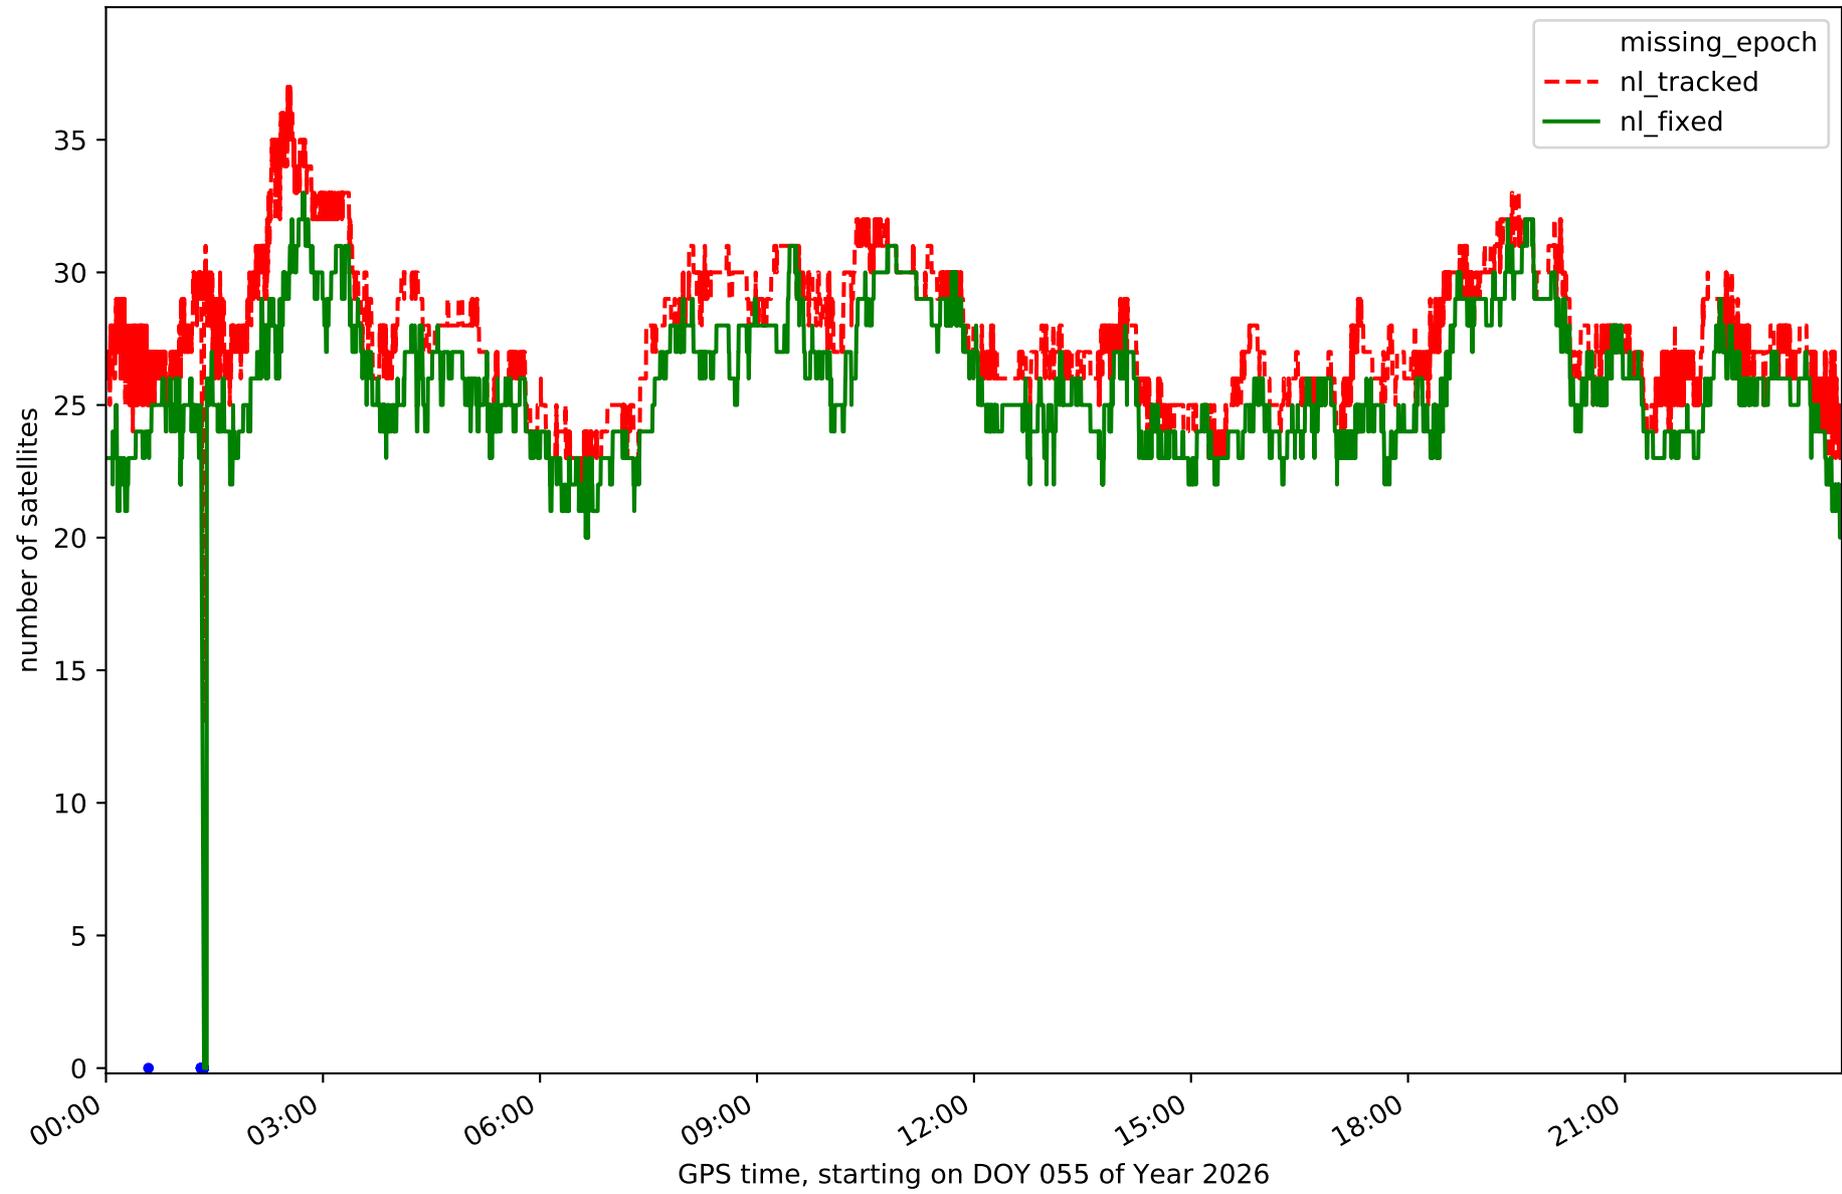


Station LP03 in network N32T

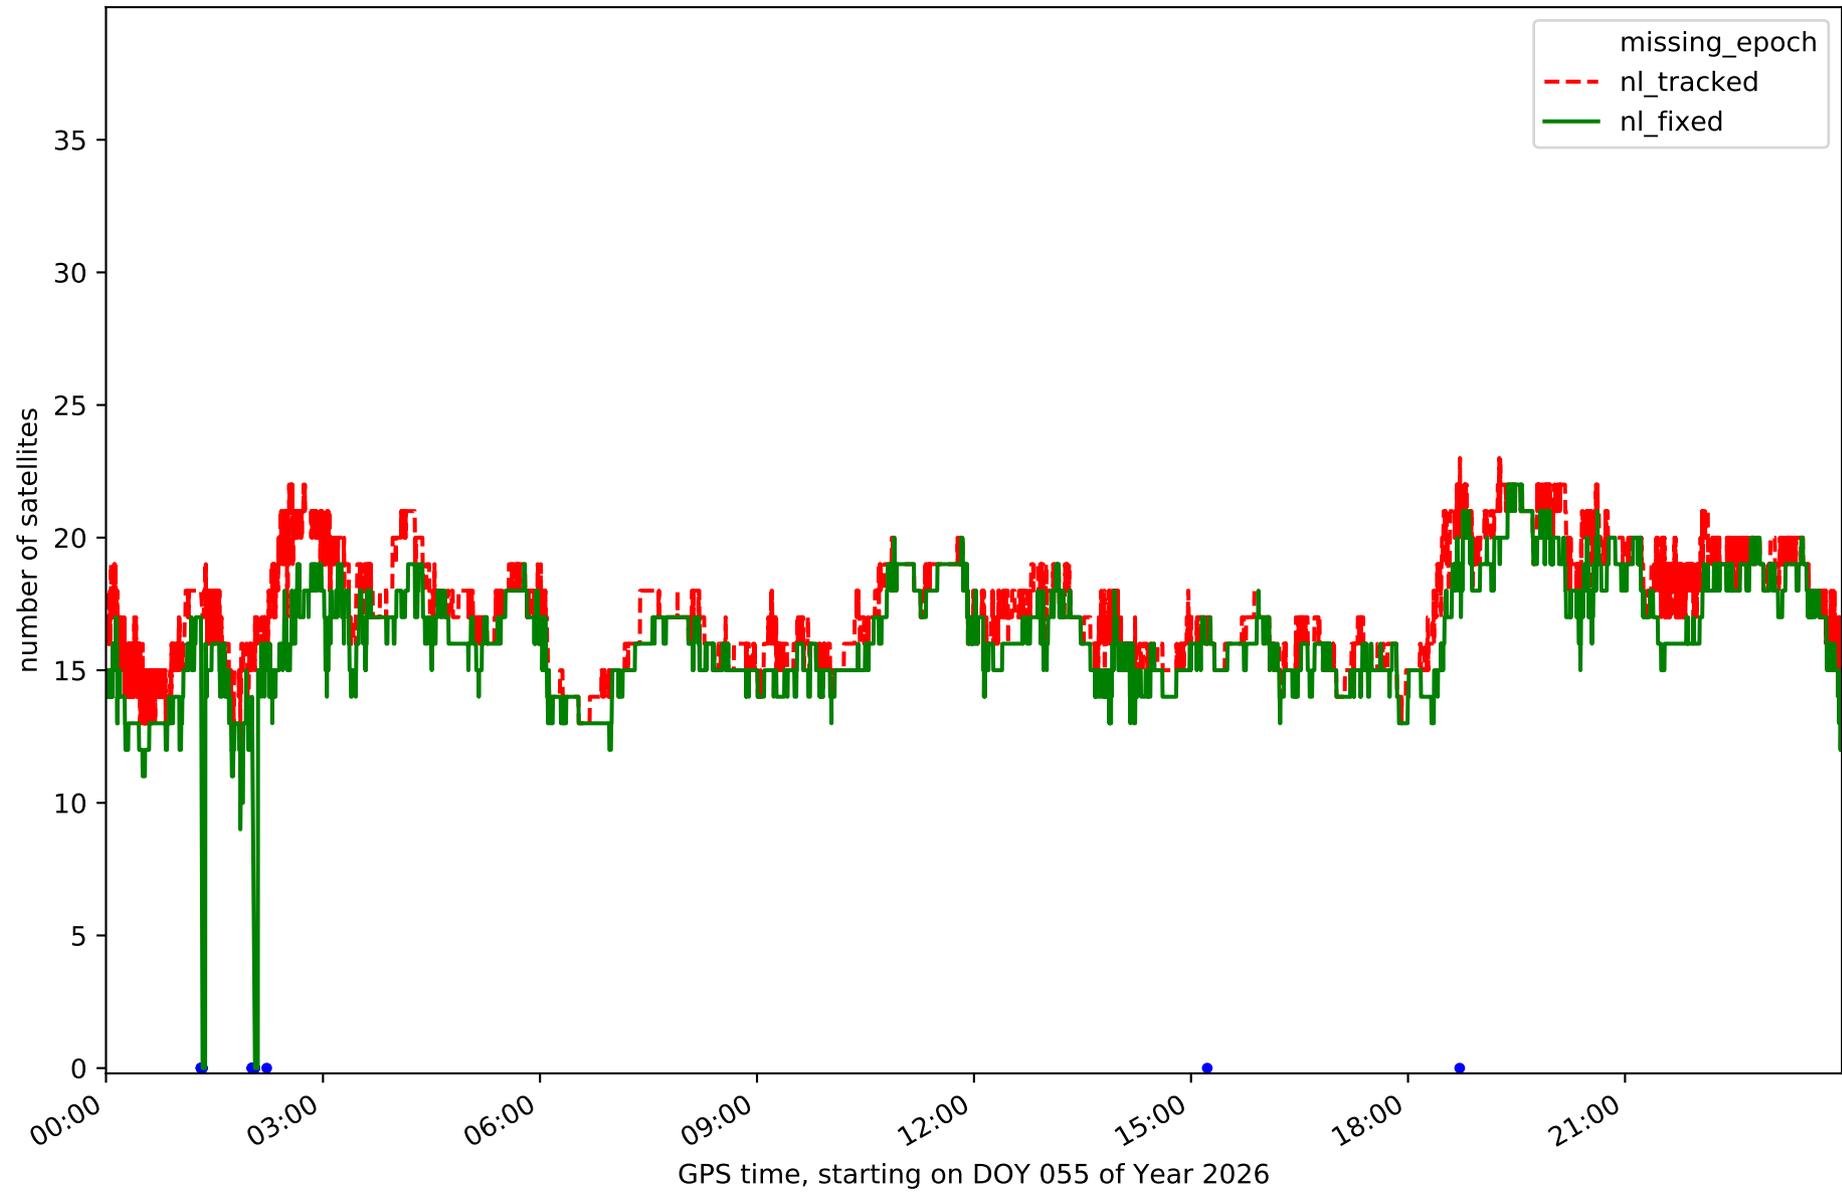


Station LPAL in network N32T

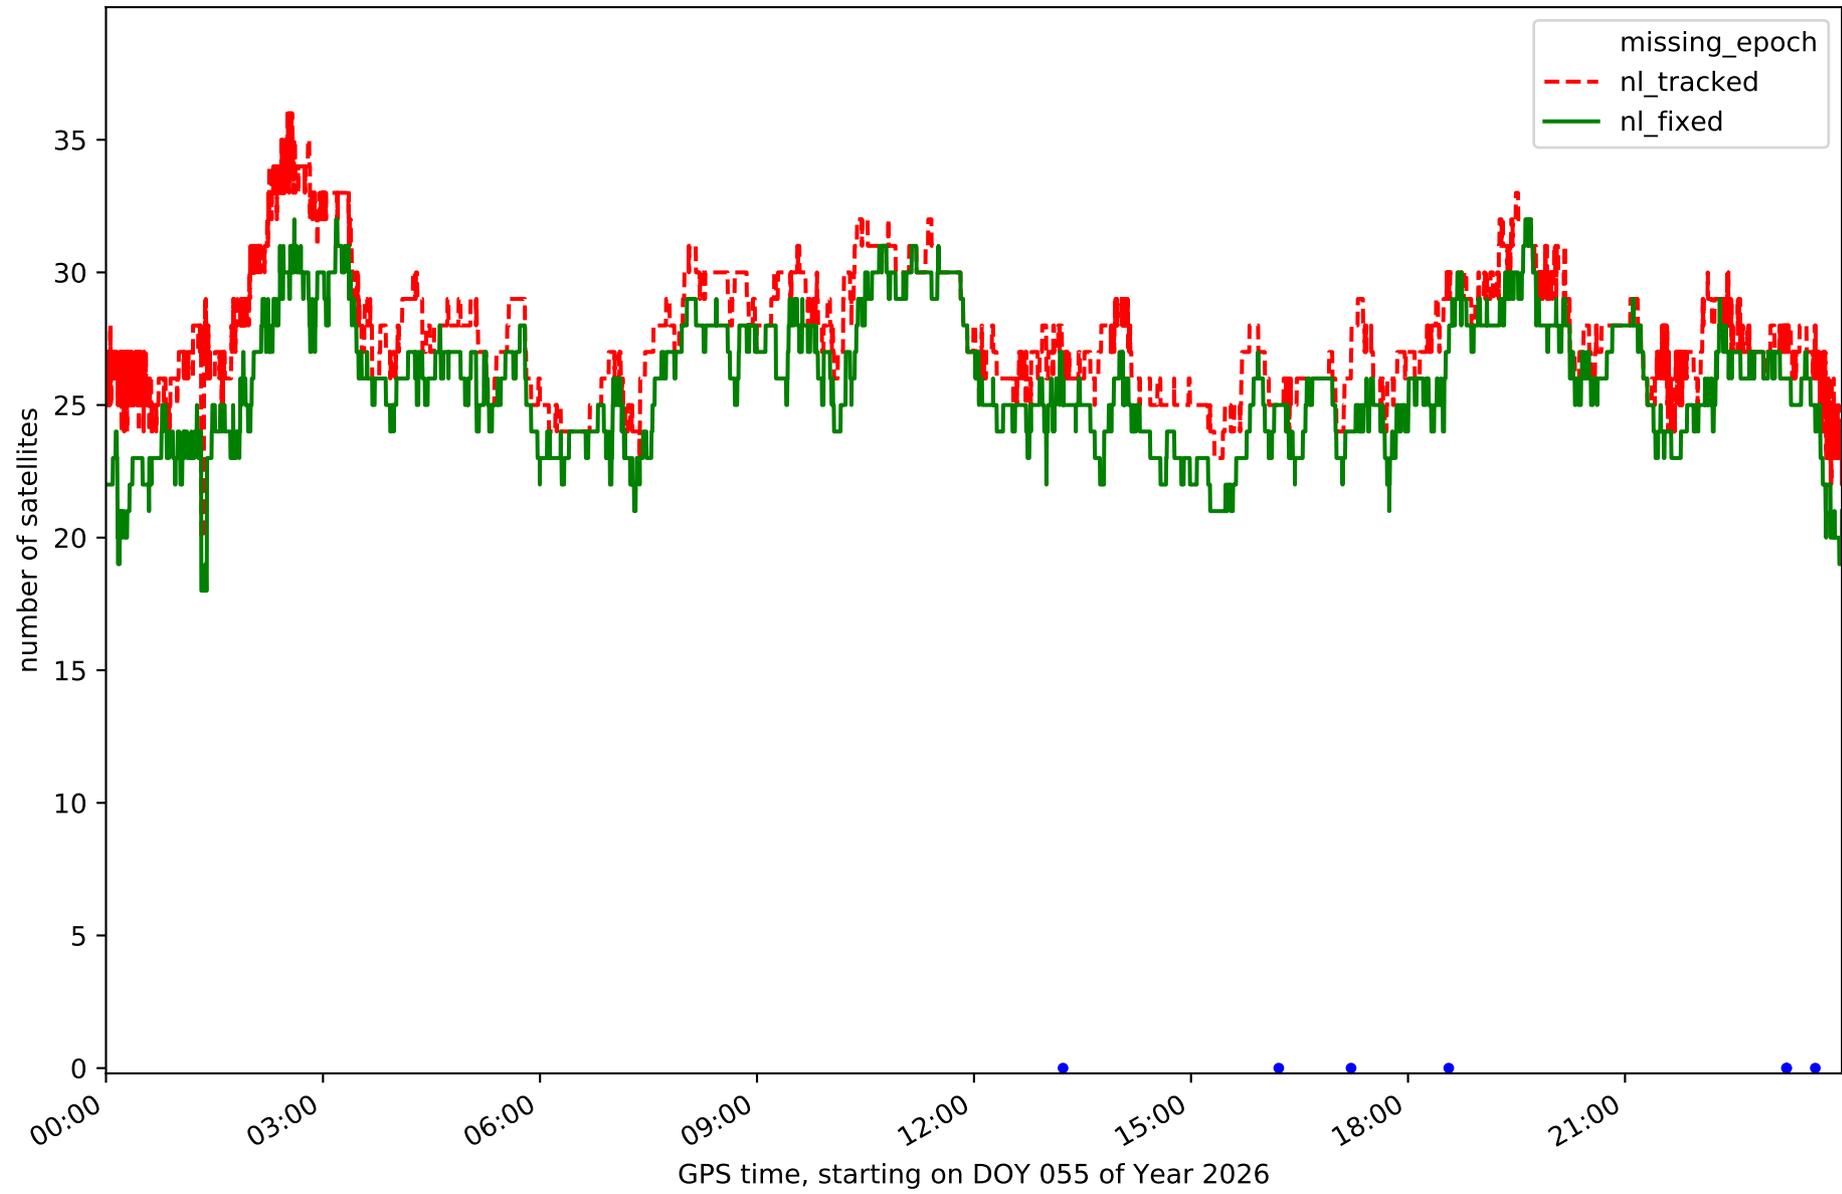


Station LRES in network N32T

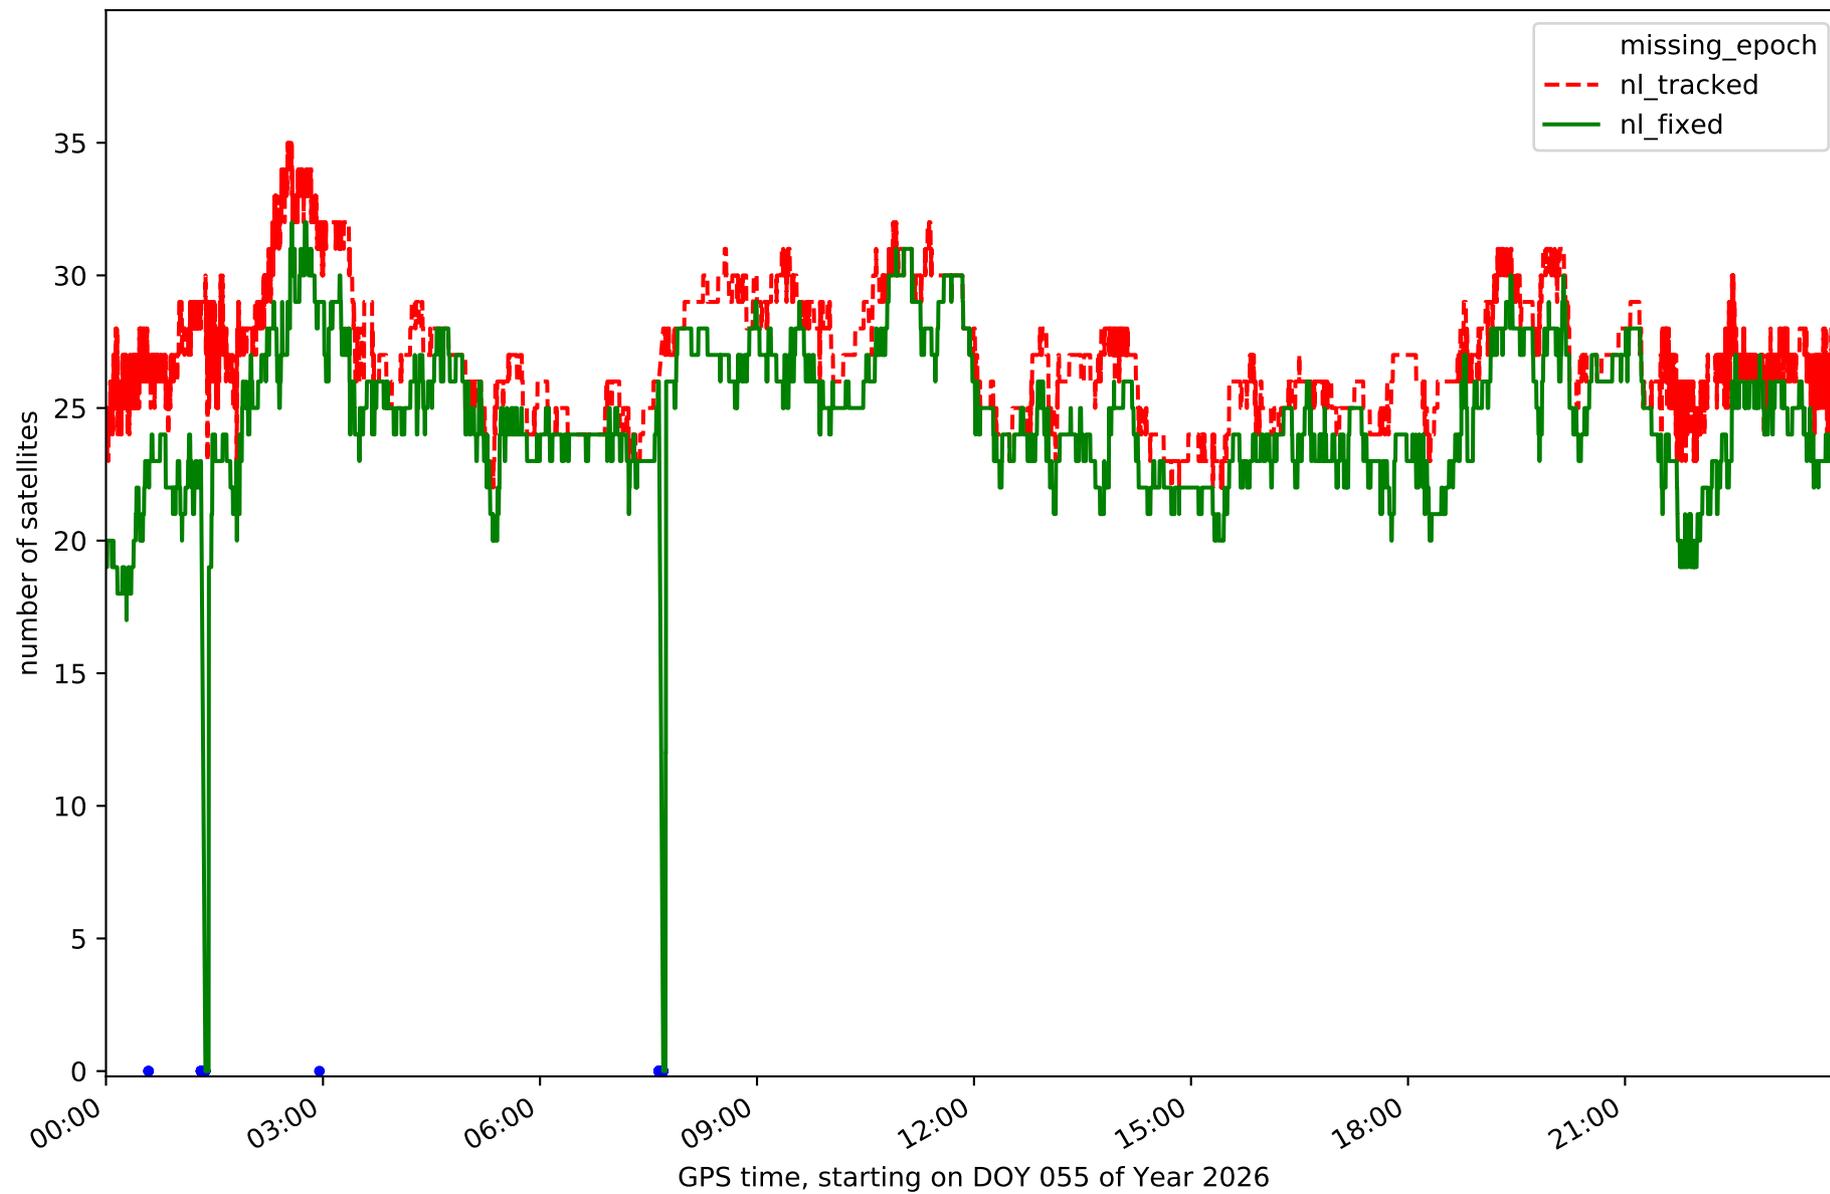


Station TN01 in network N32T

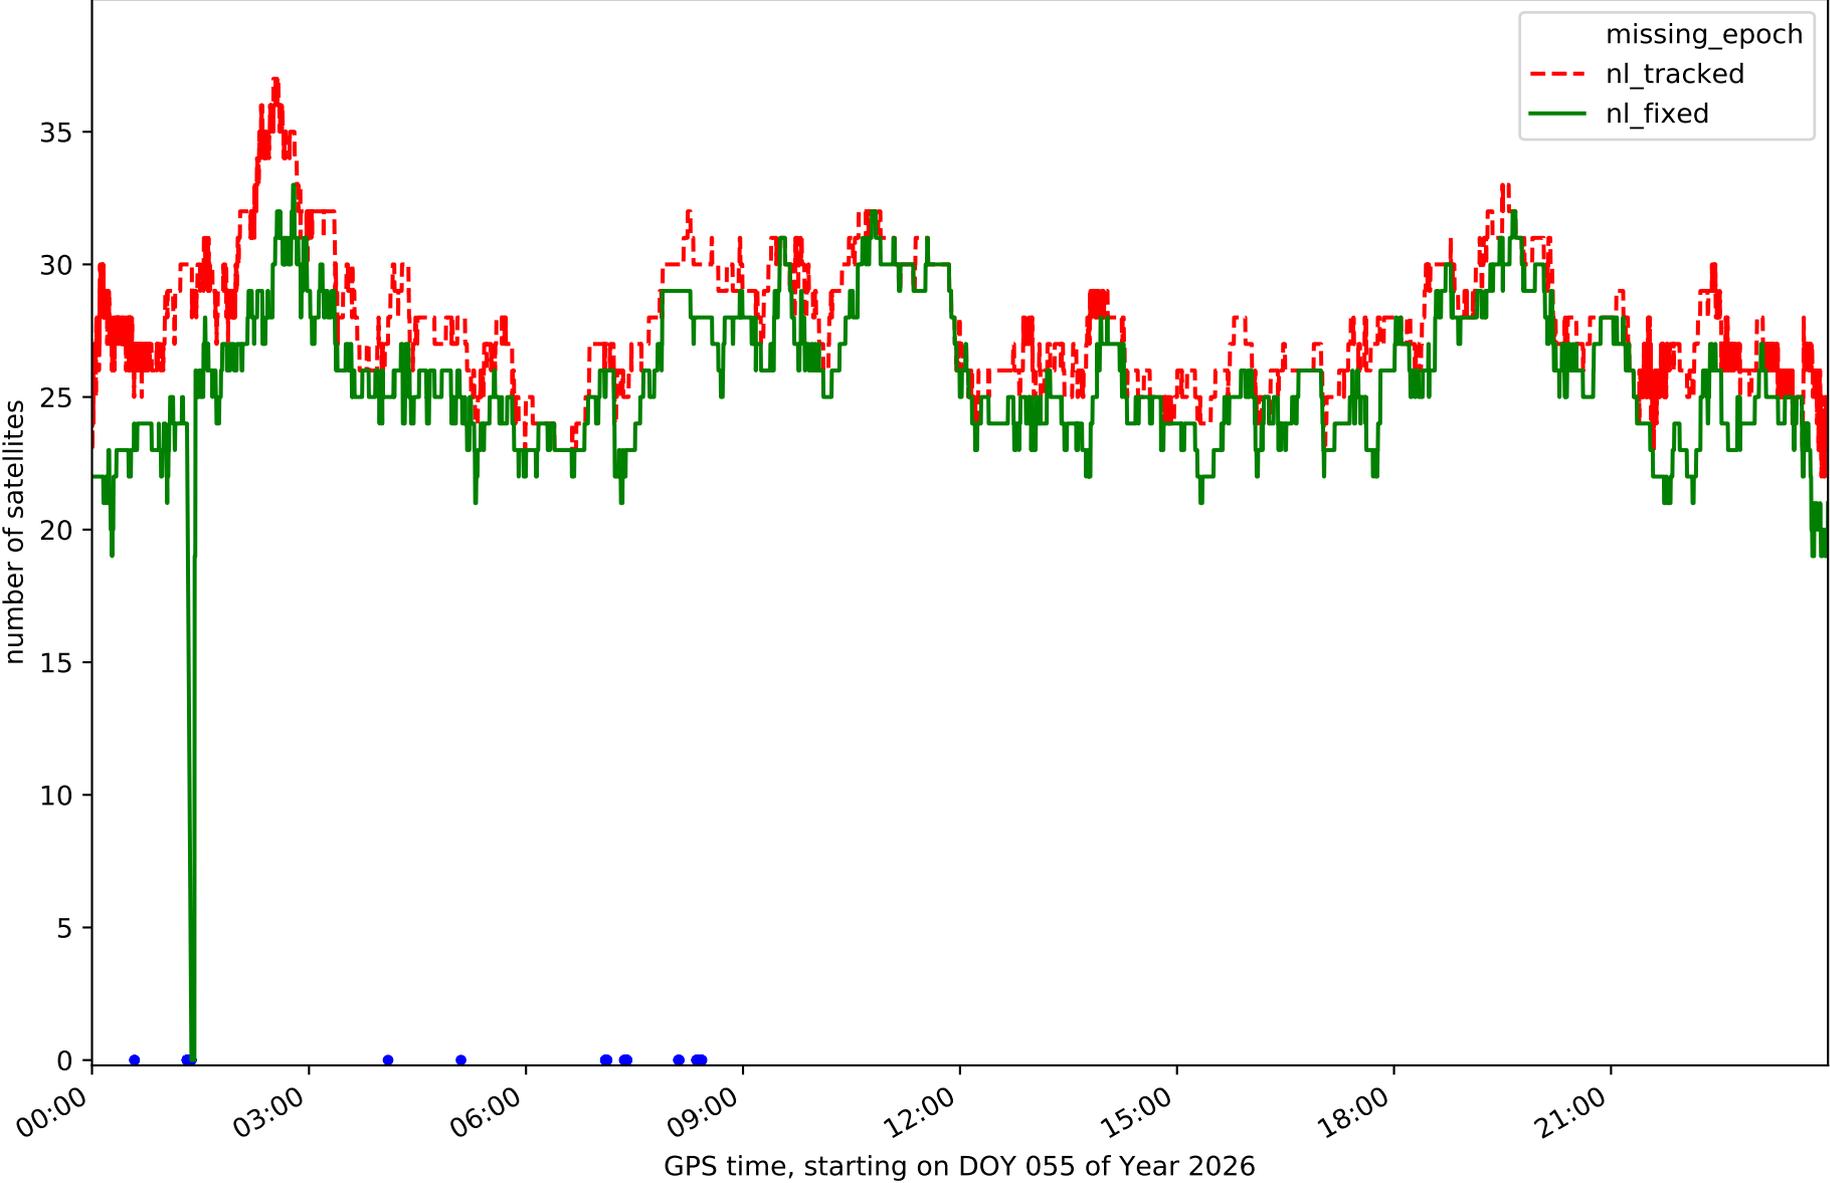


Station TN02 in network N32T

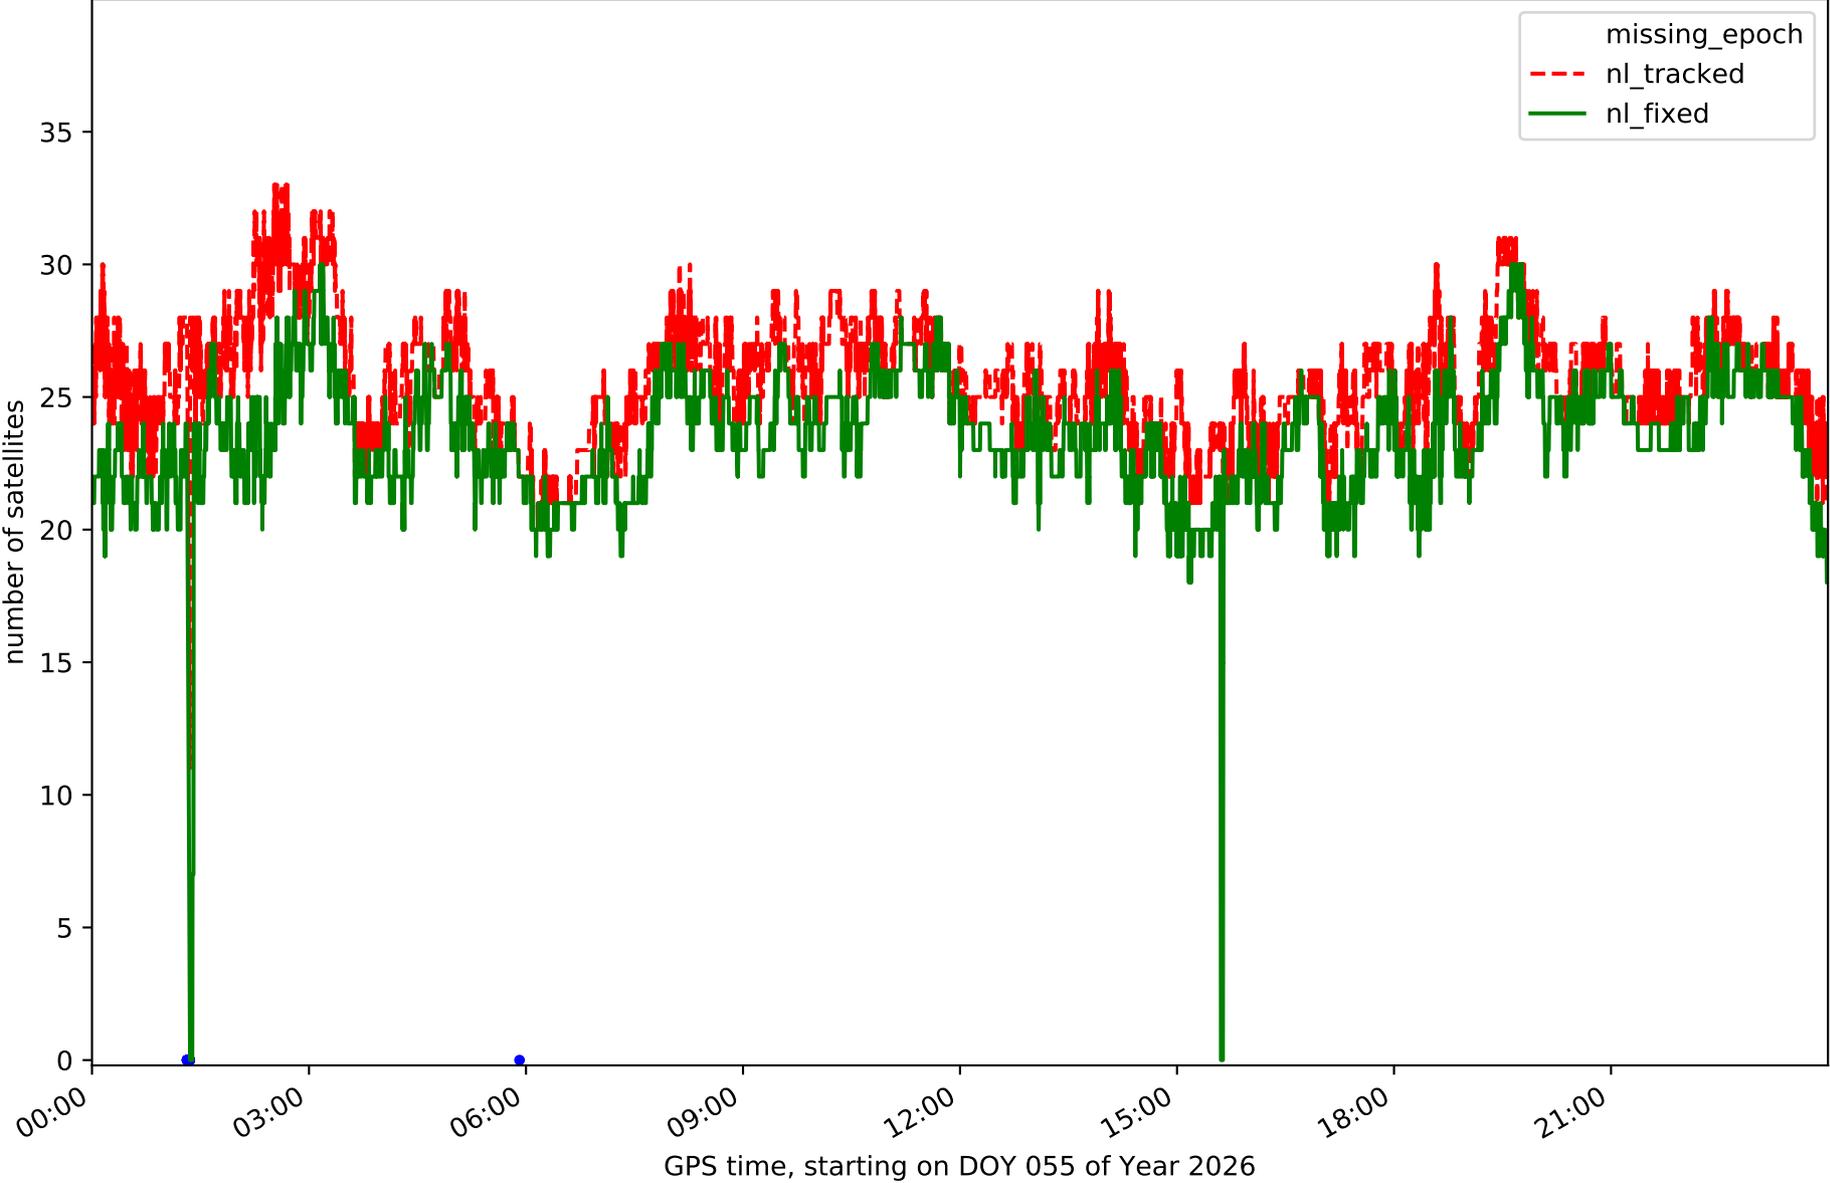


Station TN03 in network N32T

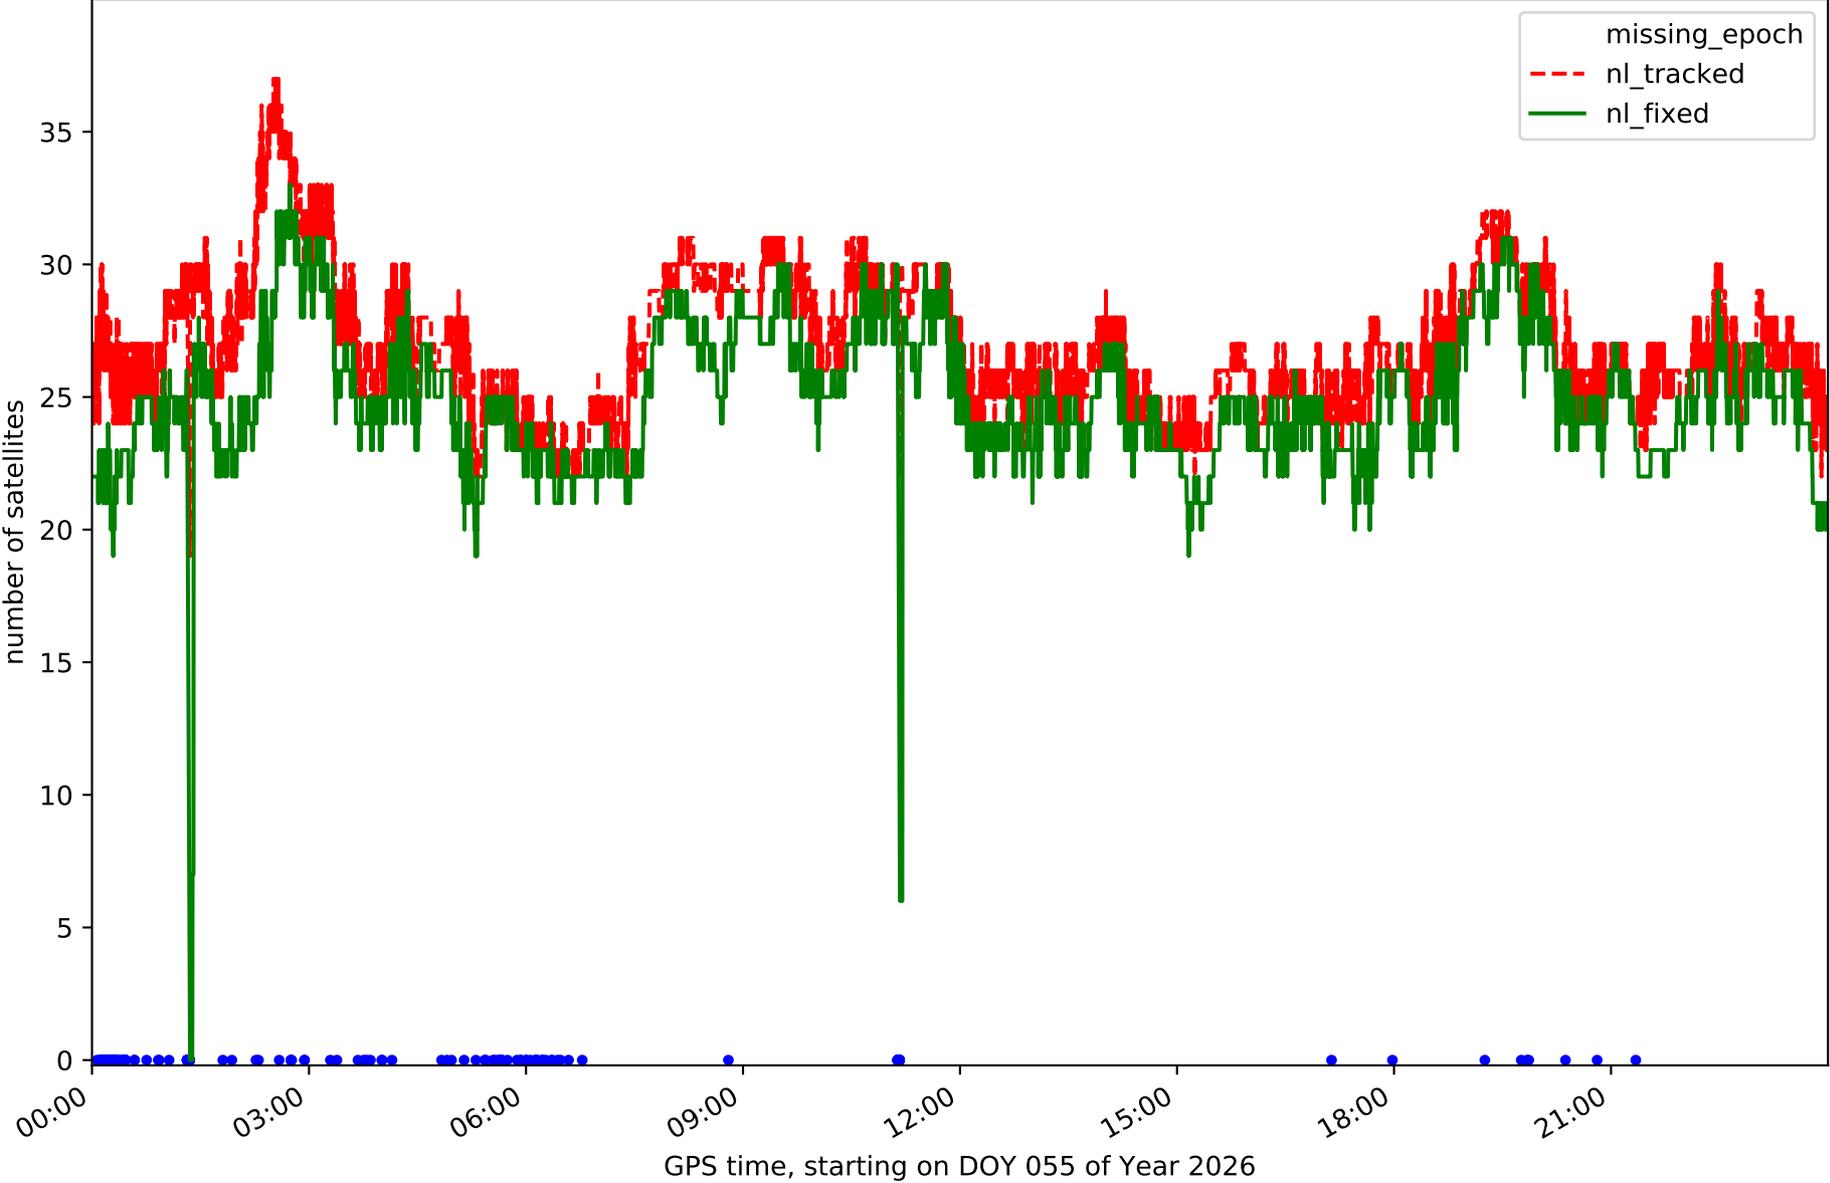


Station TN06 in network N32T

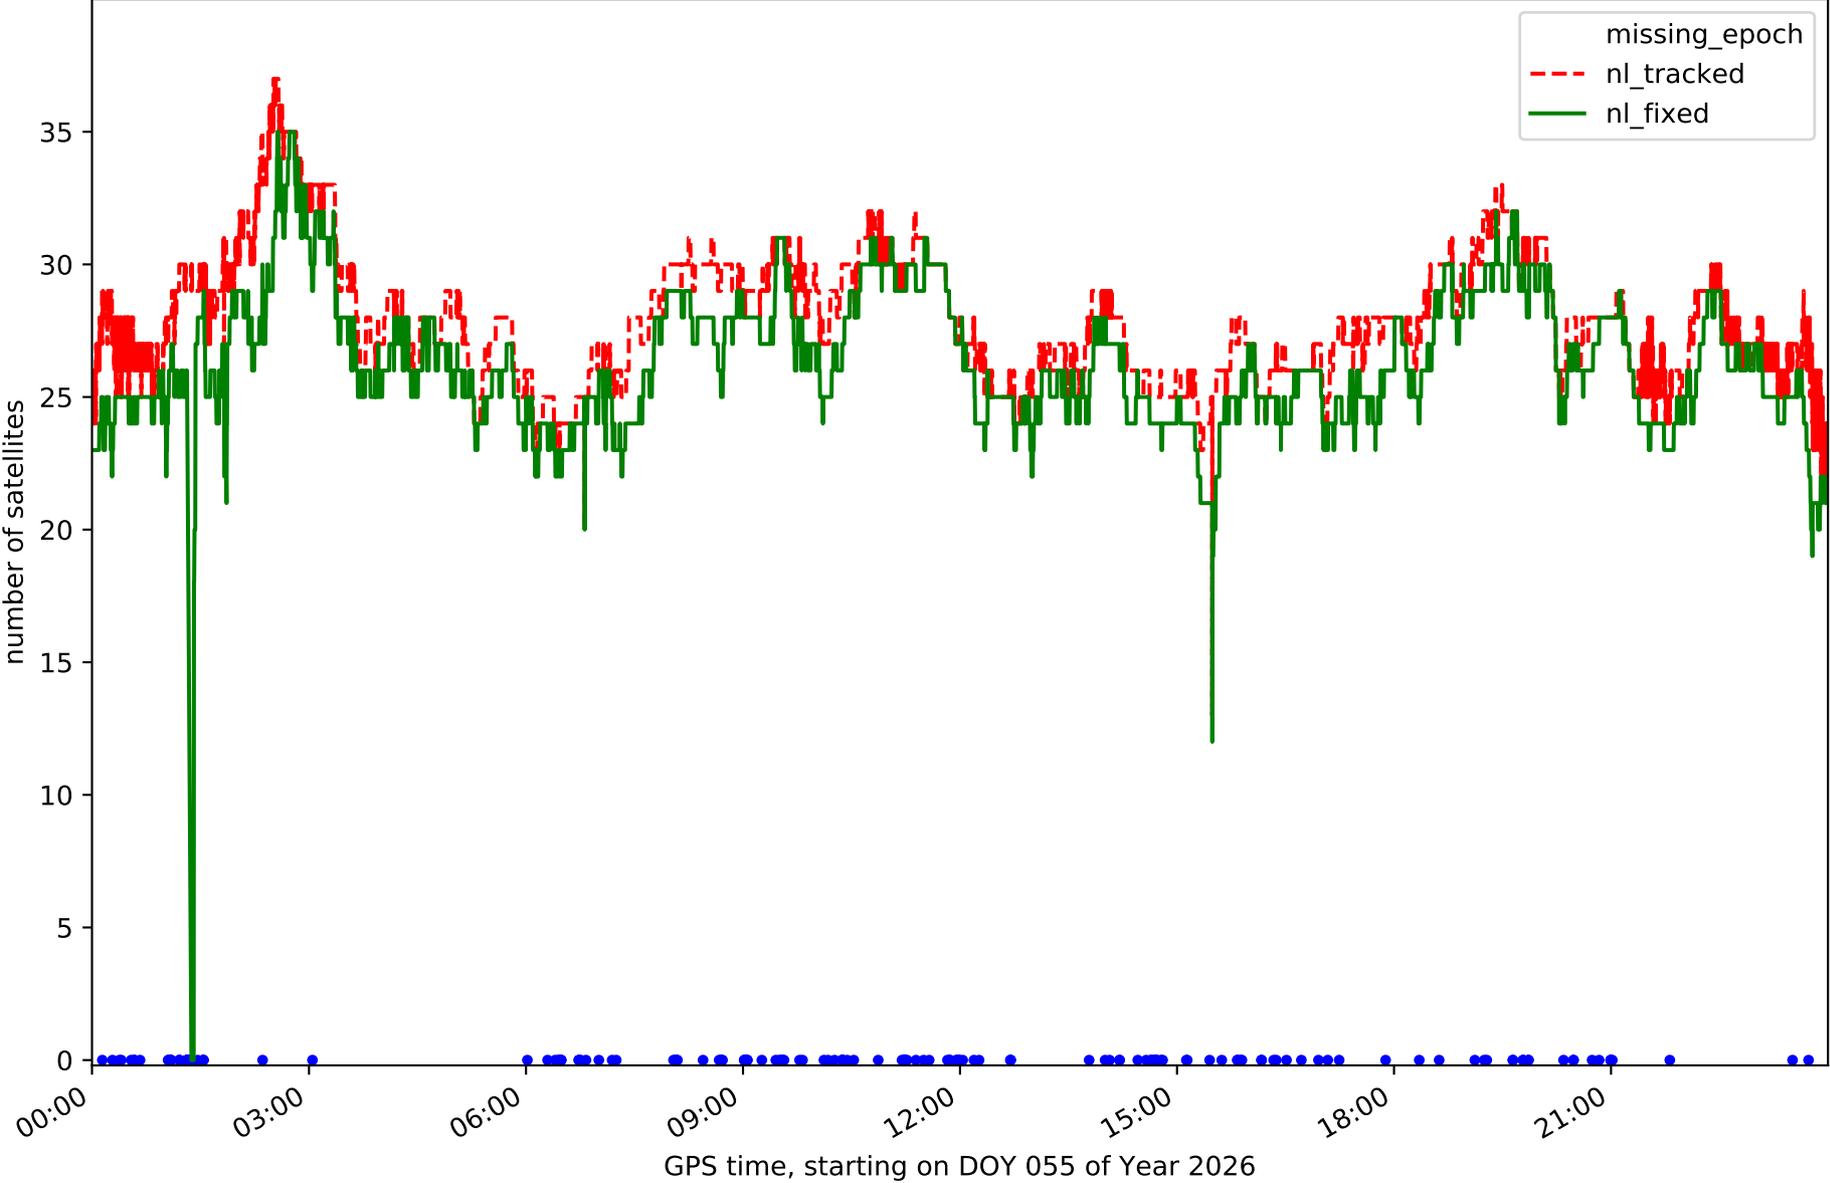


Station TN09 in network N32T

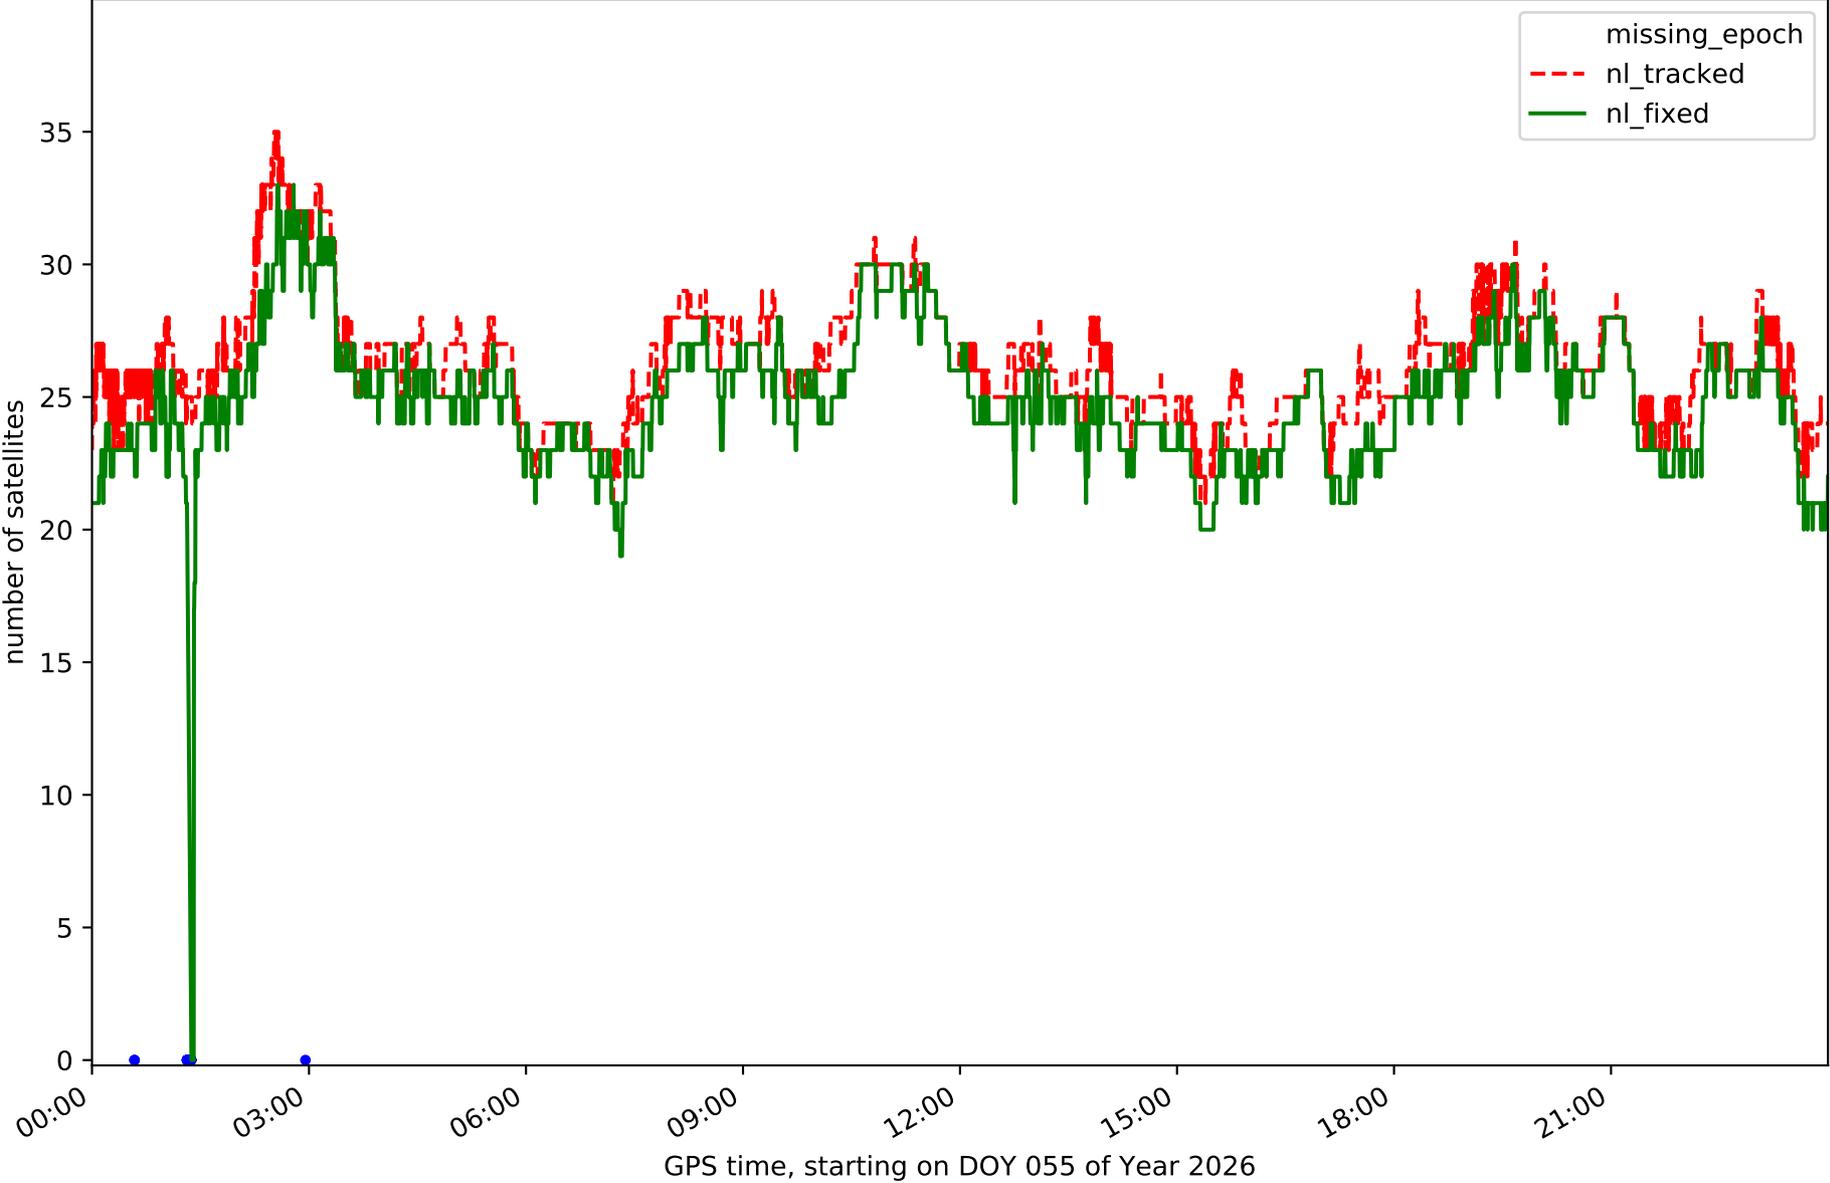


Station TE11 in network N32T

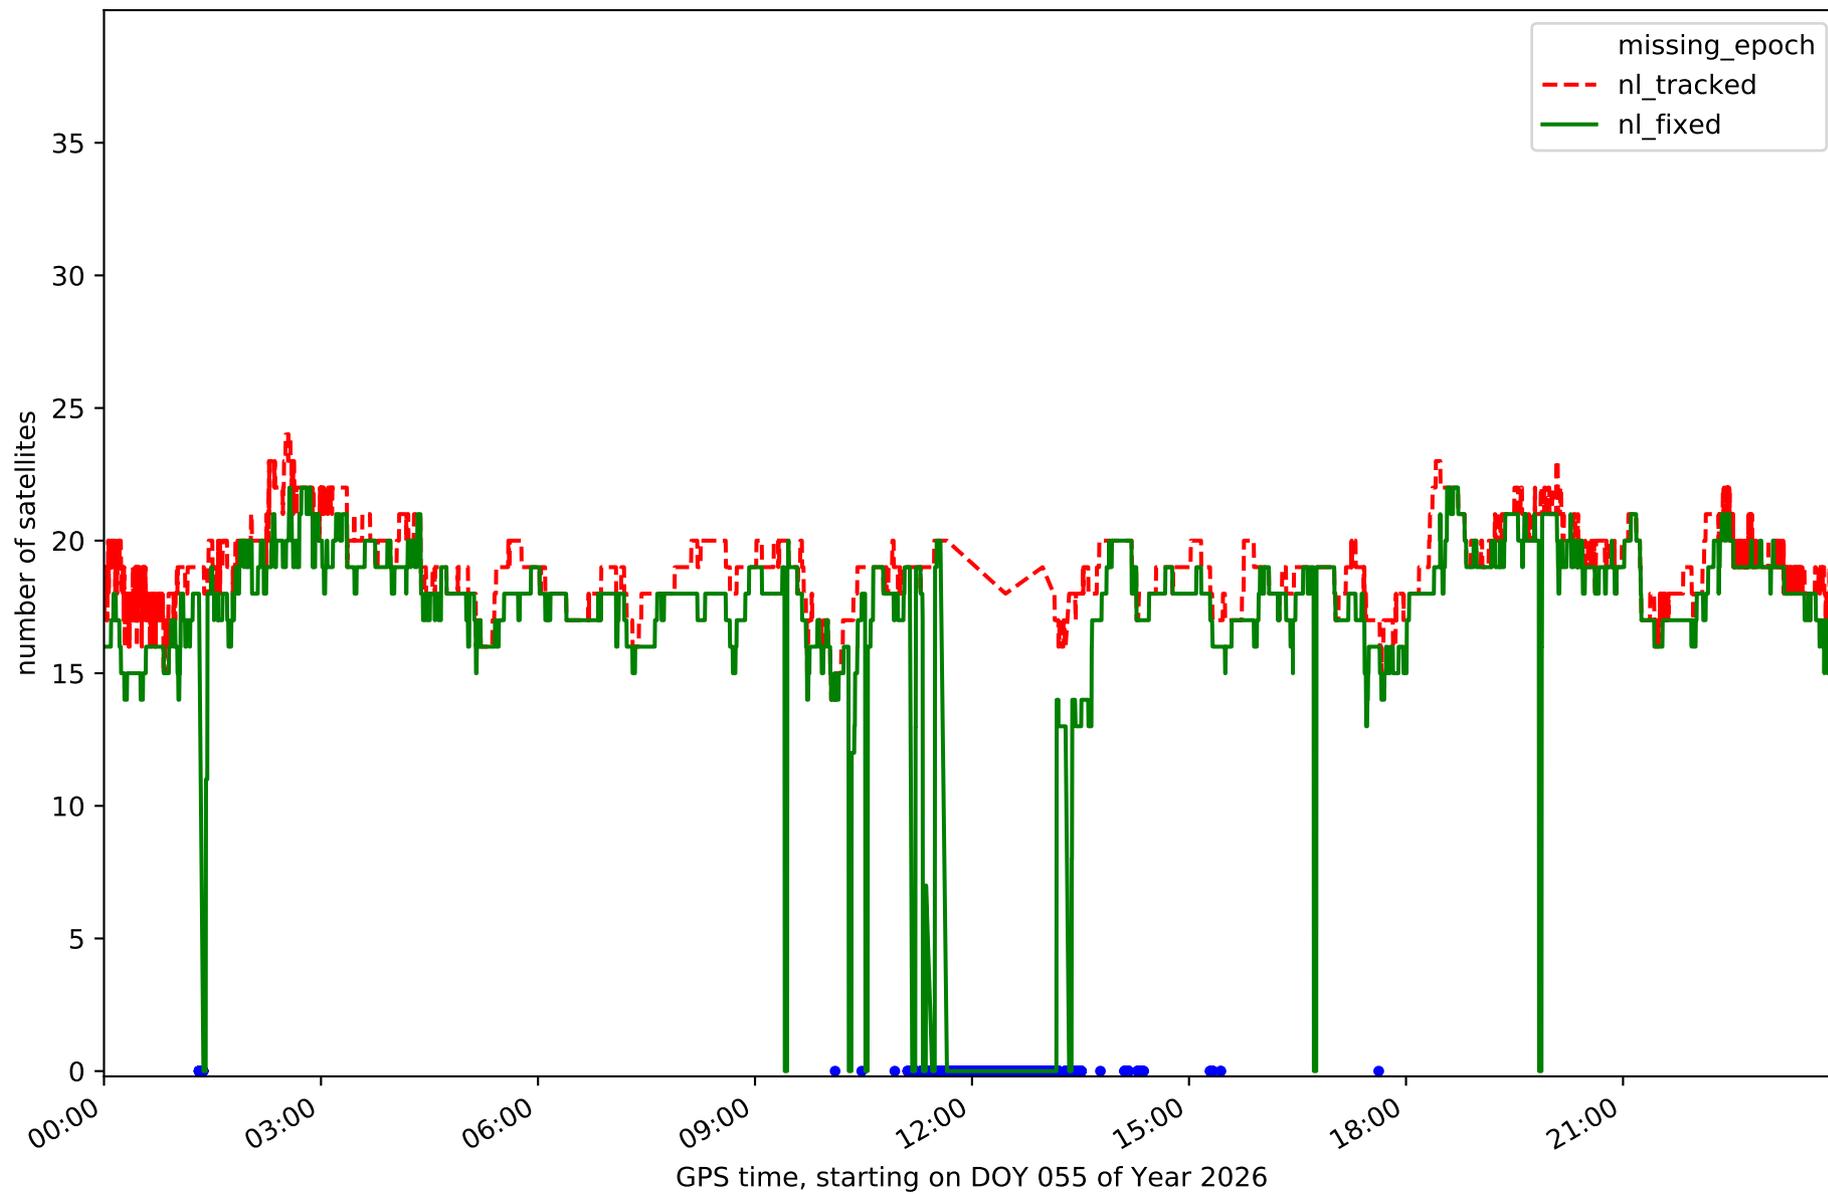


# RefCheck for station EH01 in network N32T

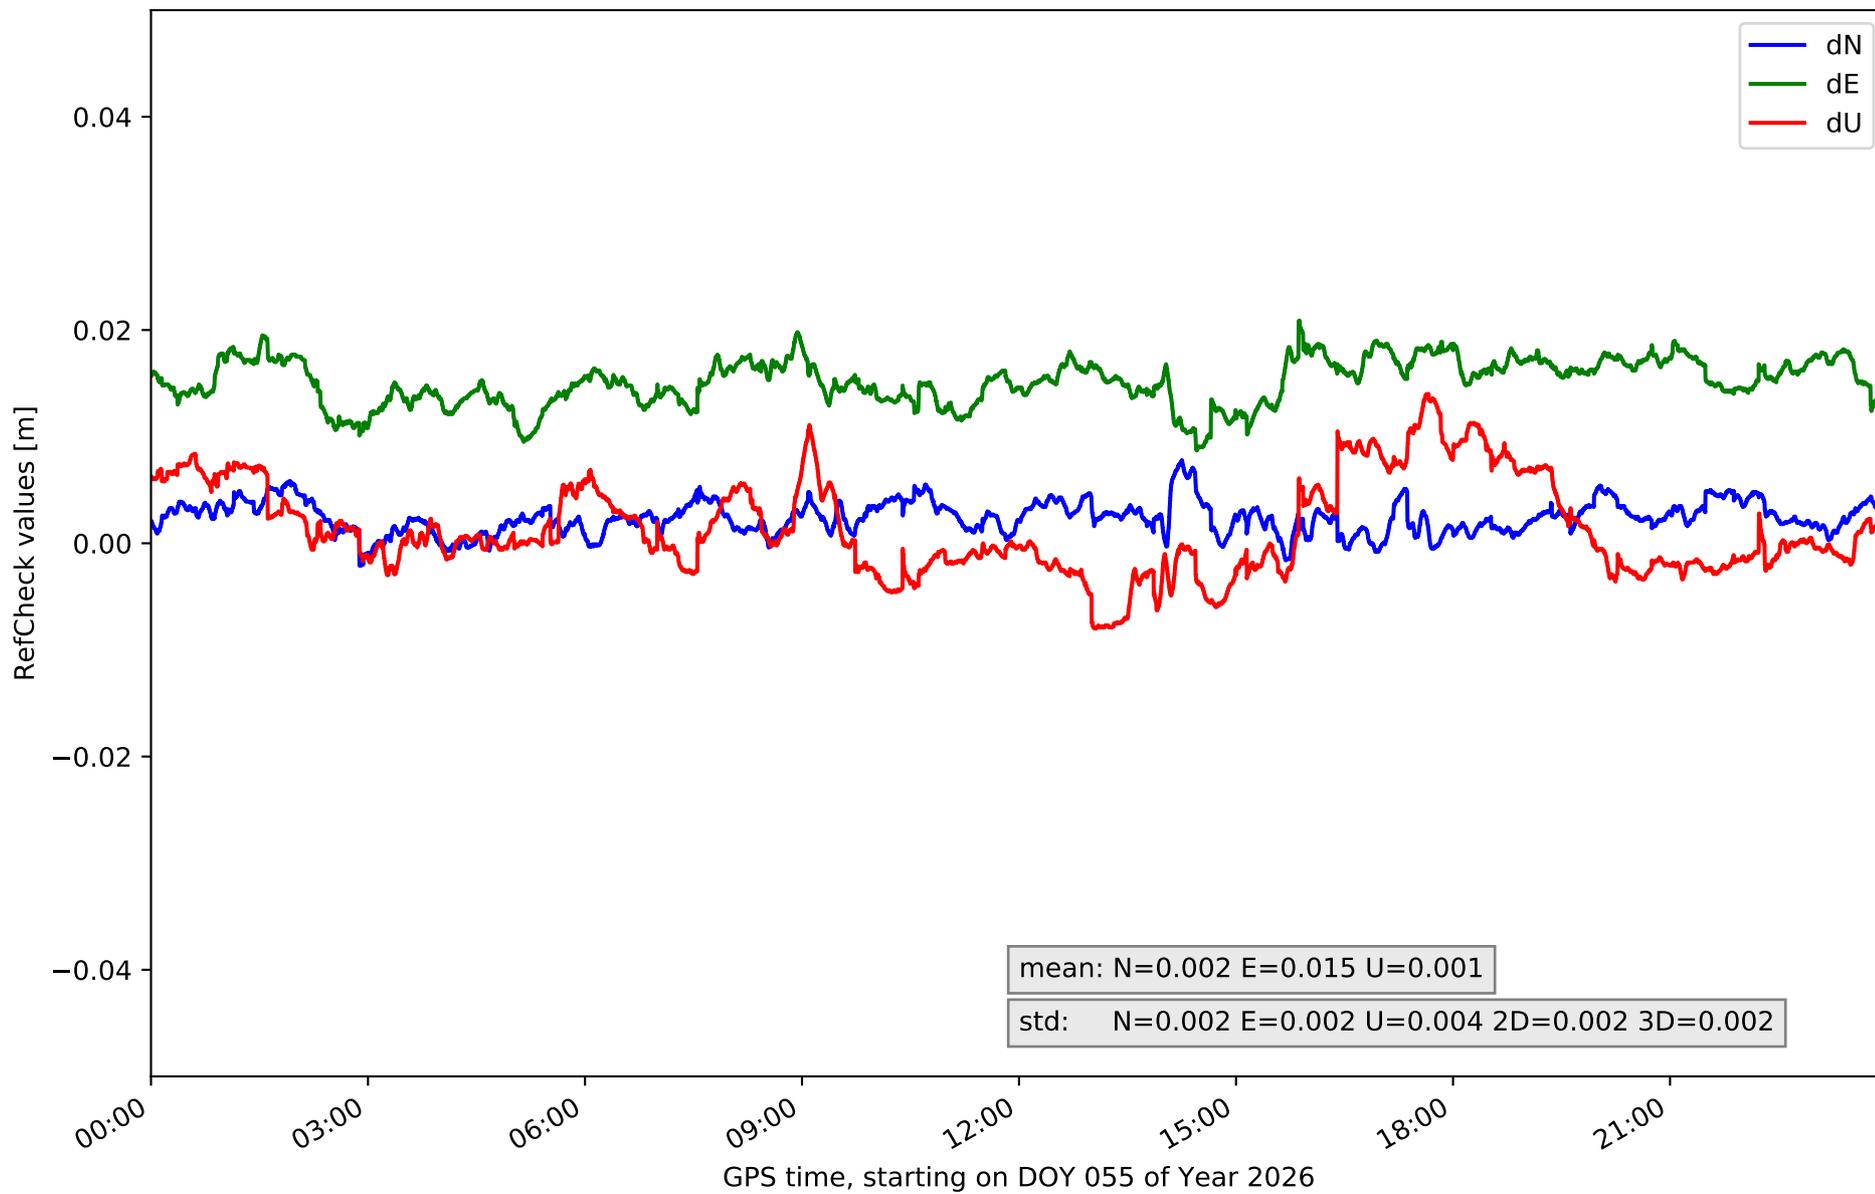


RefCheck for station EH02 in network N32T

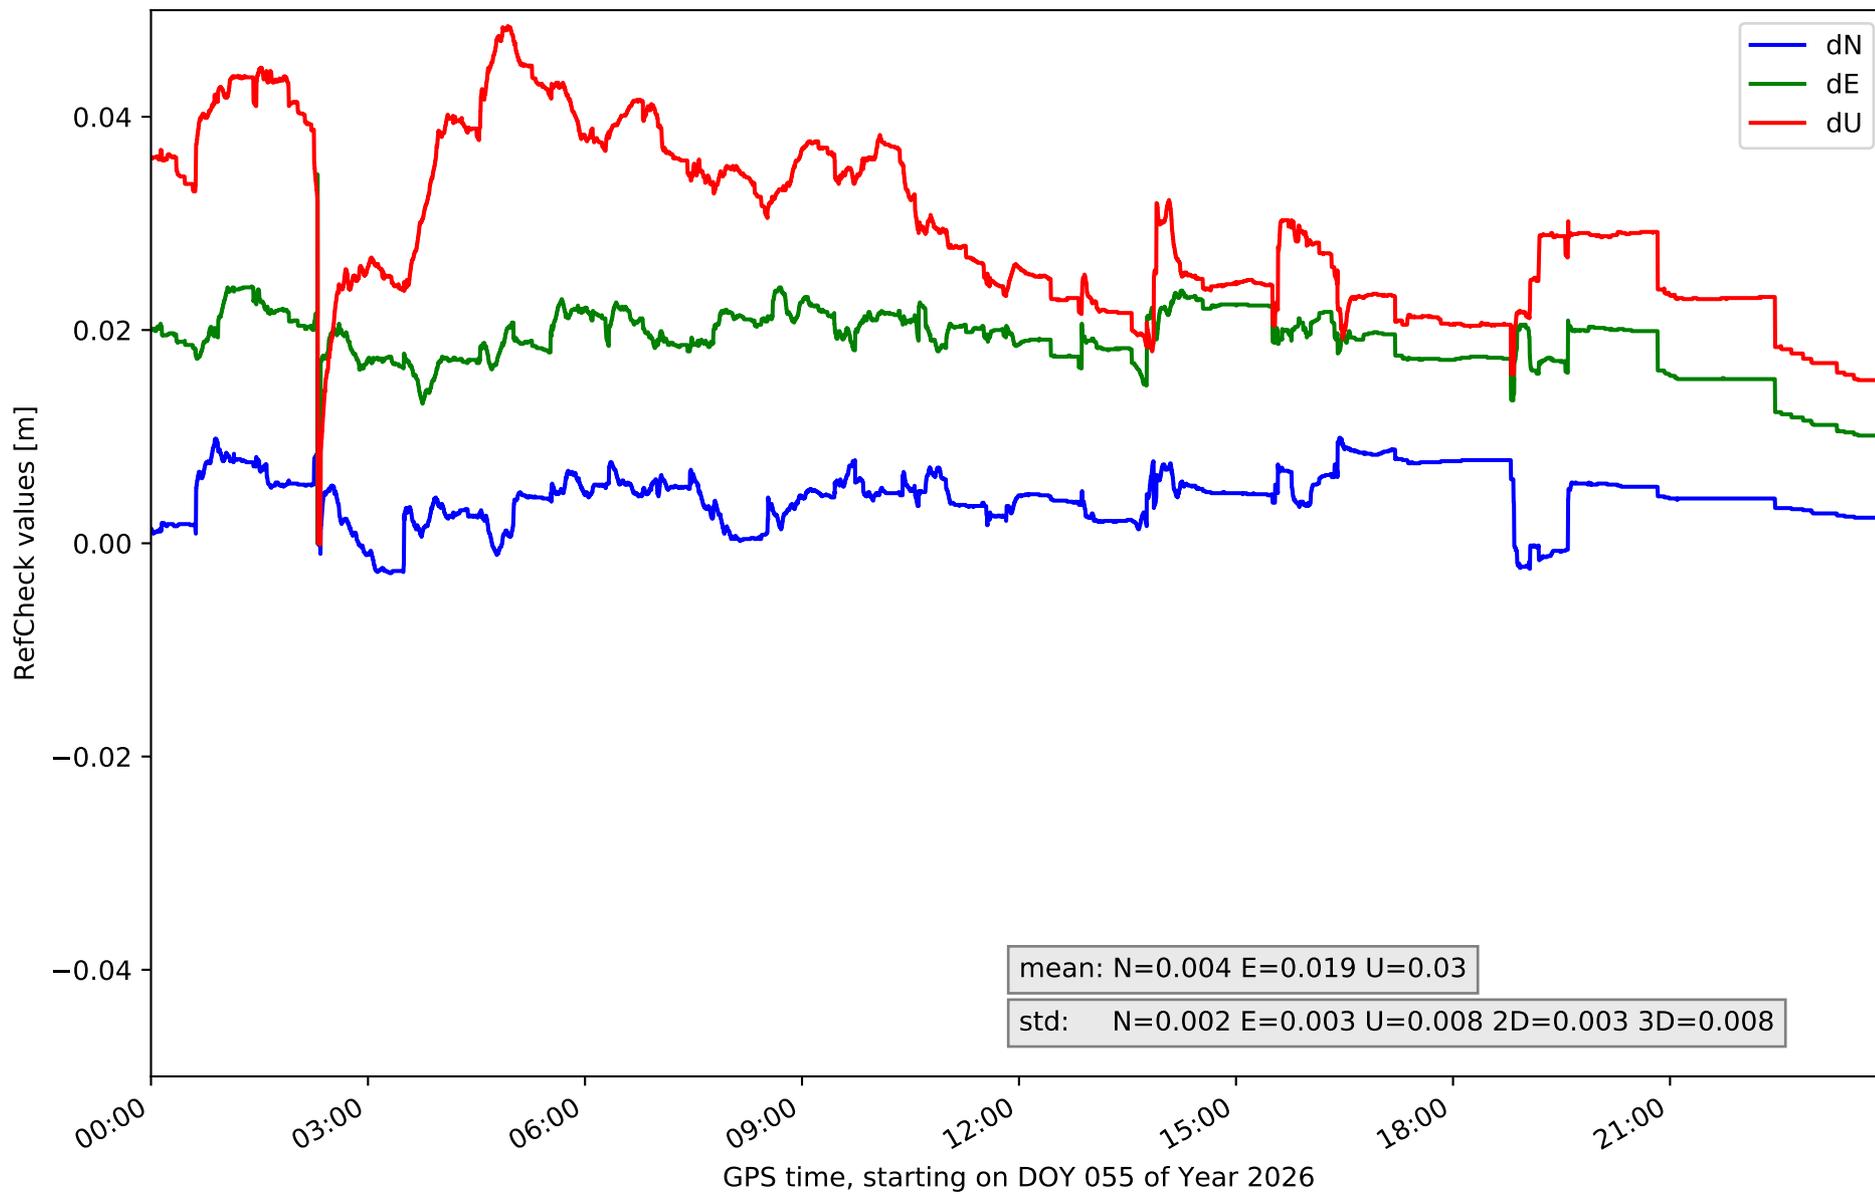


# RefCheck for station GOM1 in network N32T

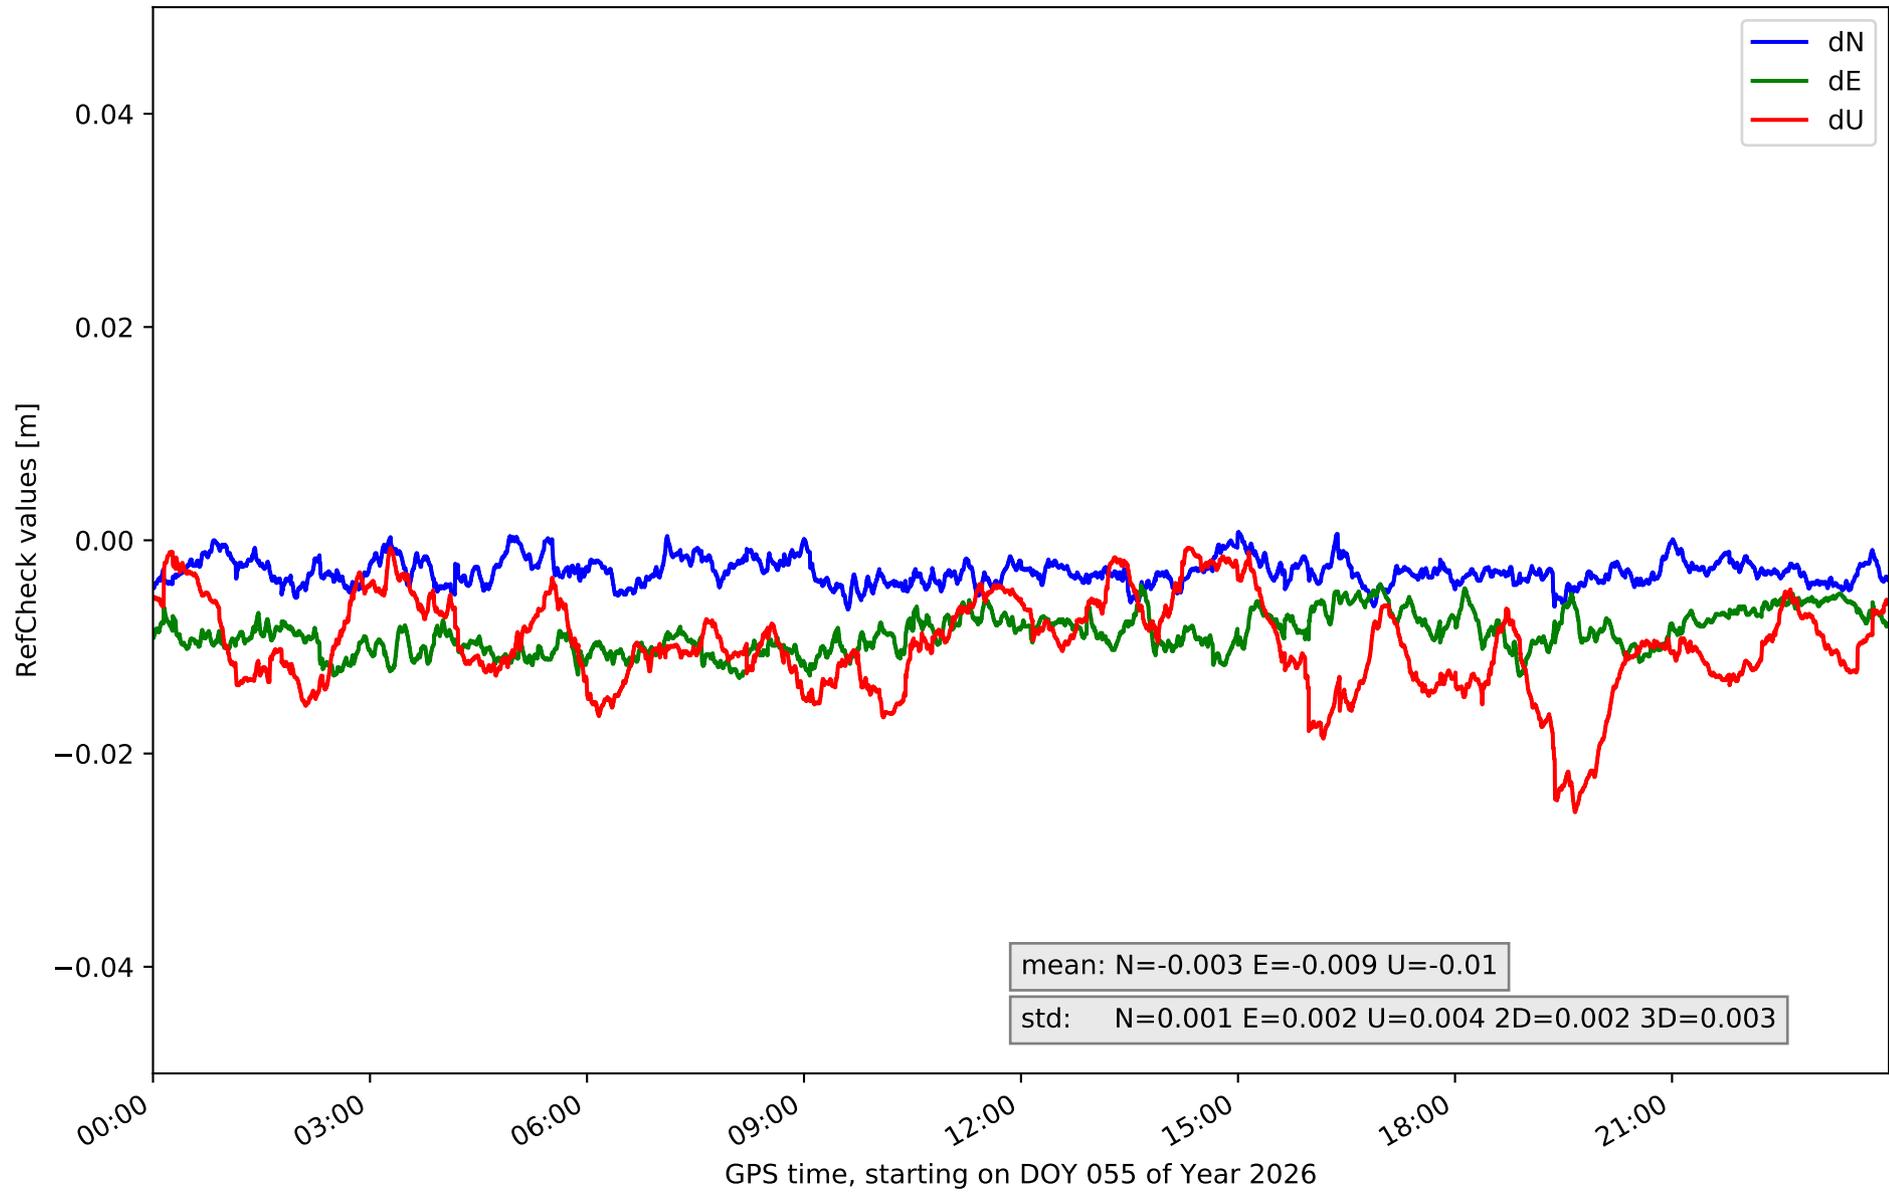


RefCheck for station GOME in network N32T

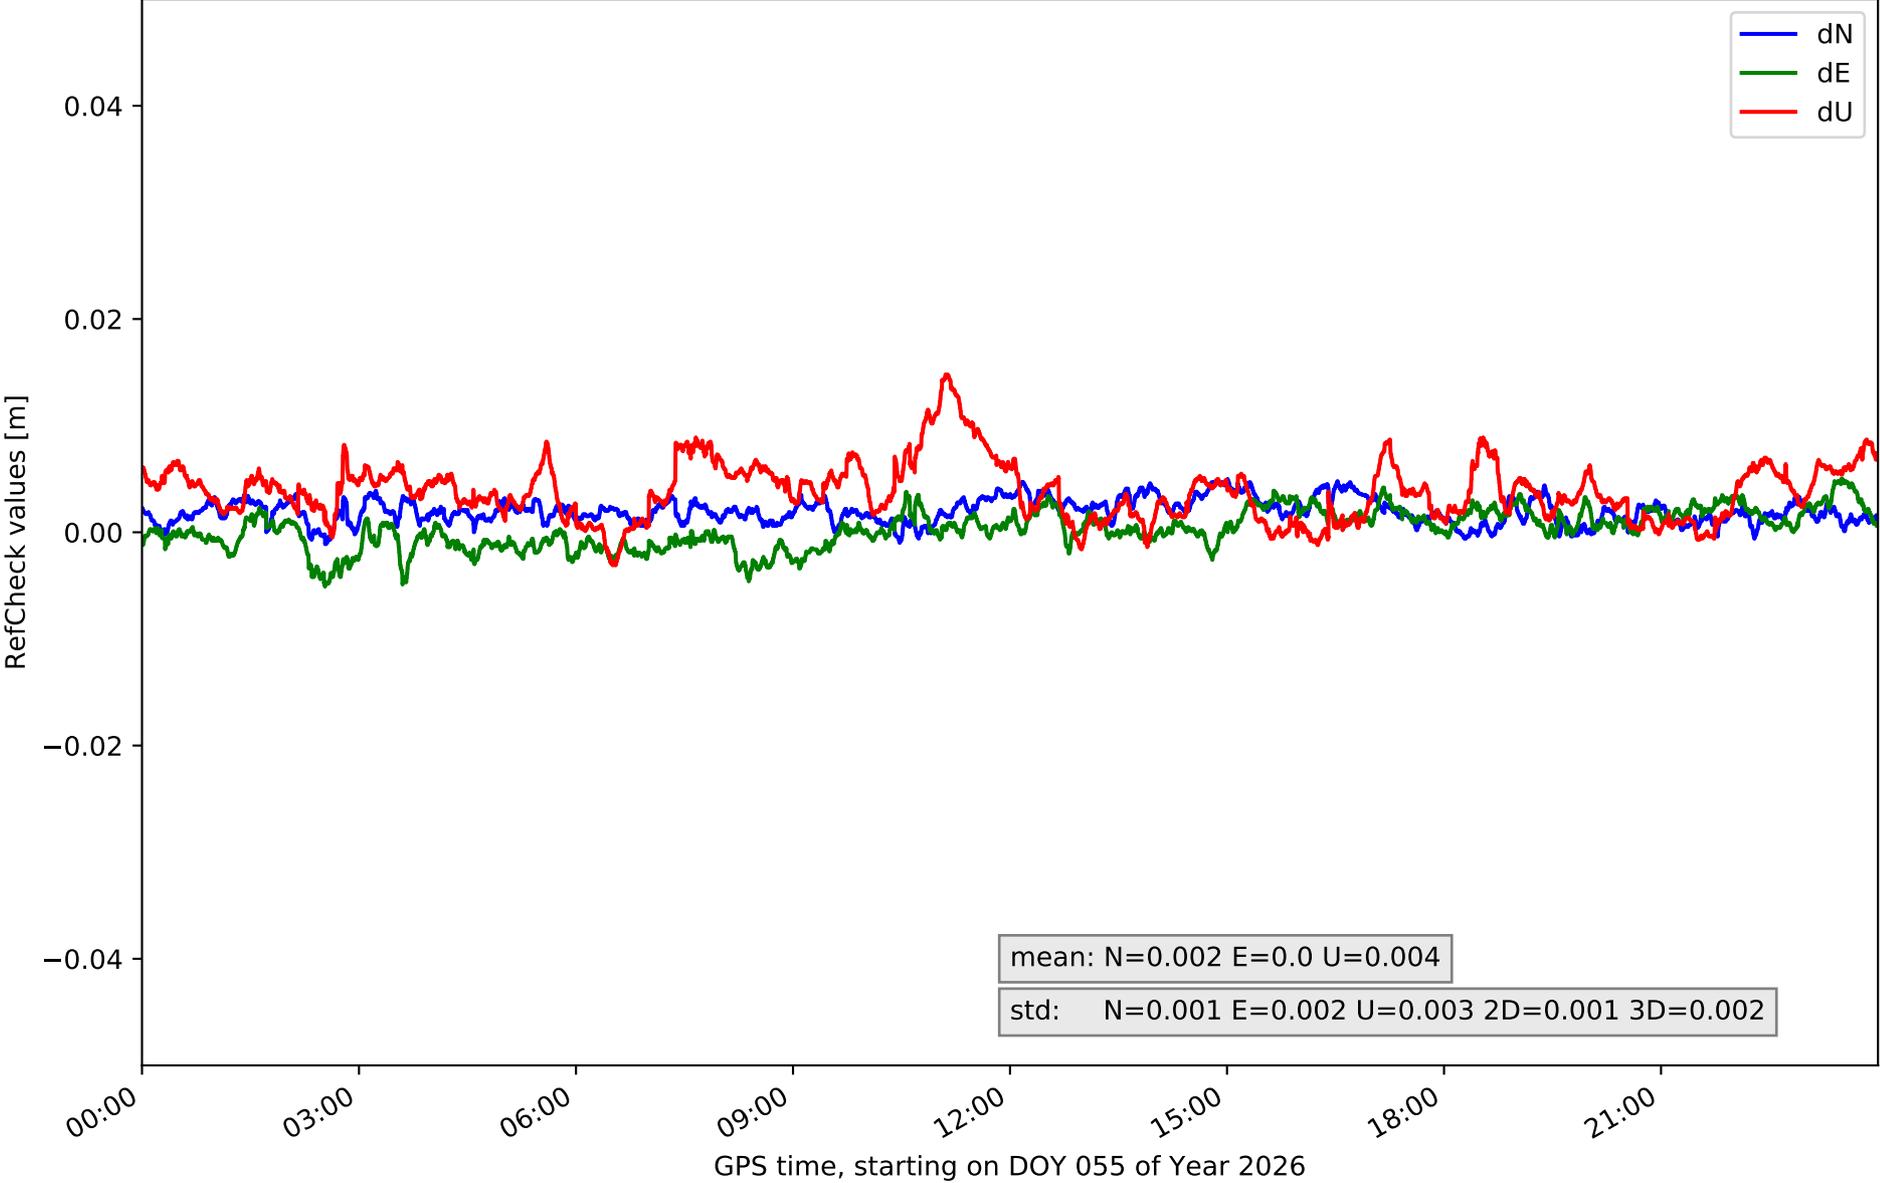


# RefCheck for station IZAN in network N32T

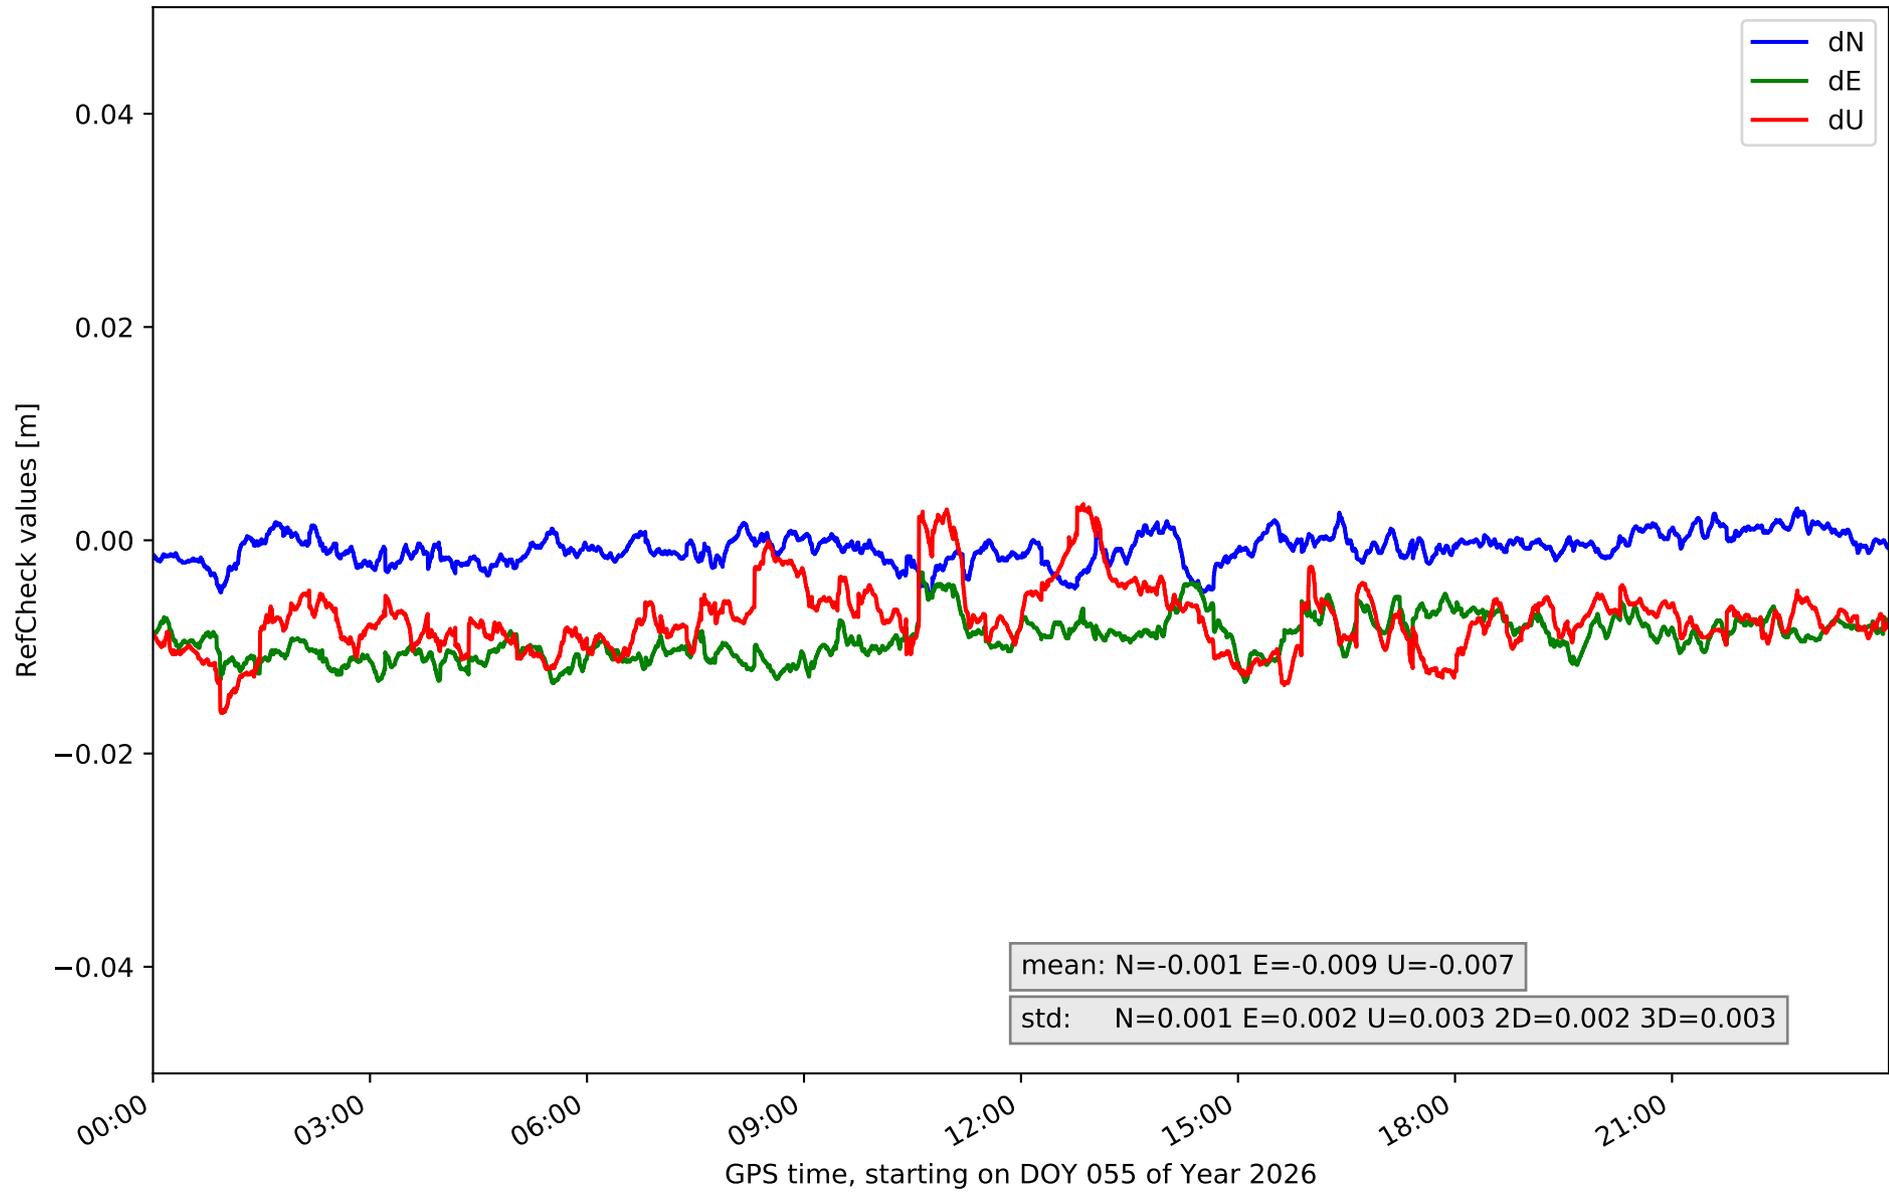


# RefCheck for station LP01 in network N32T

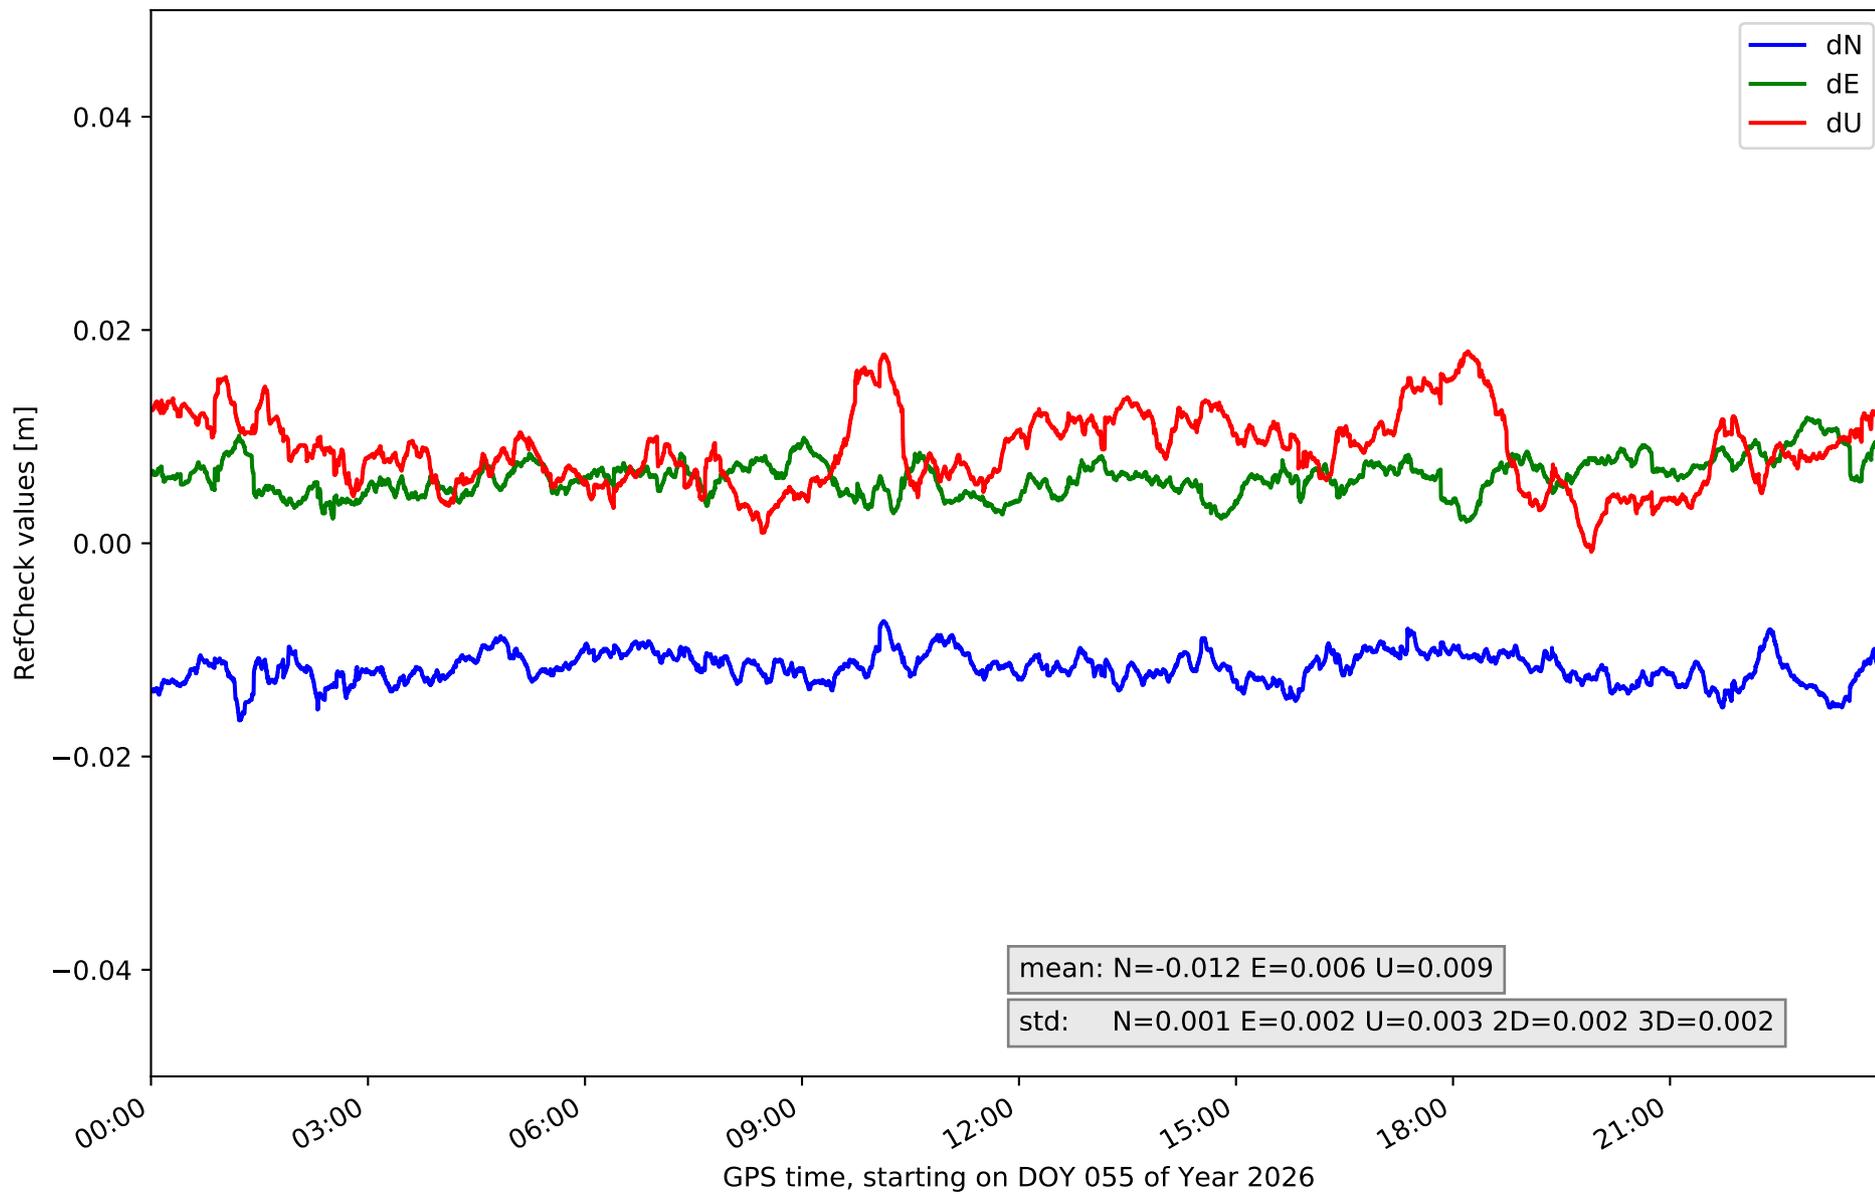


# RefCheck for station LP03 in network N32T

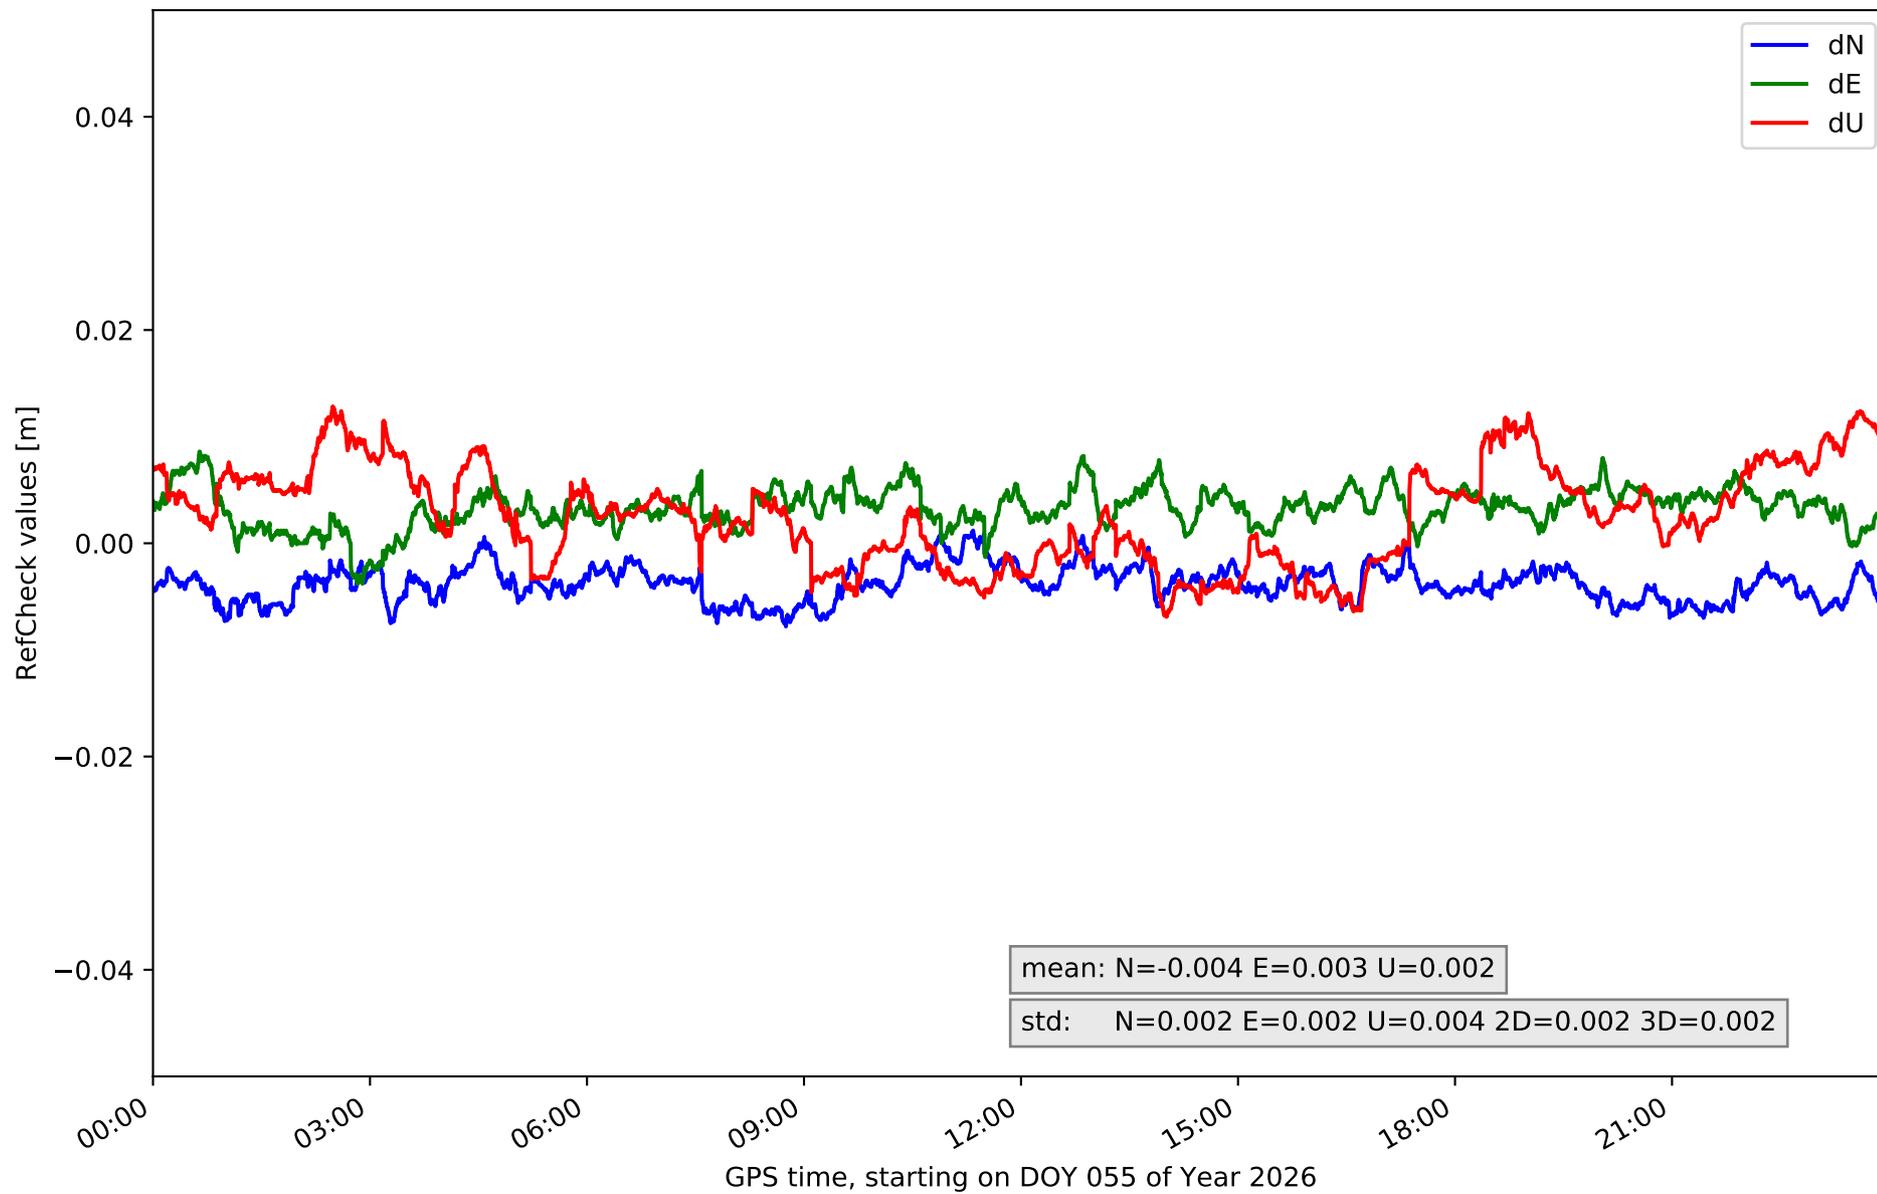


# RefCheck for station LPAL in network N32T

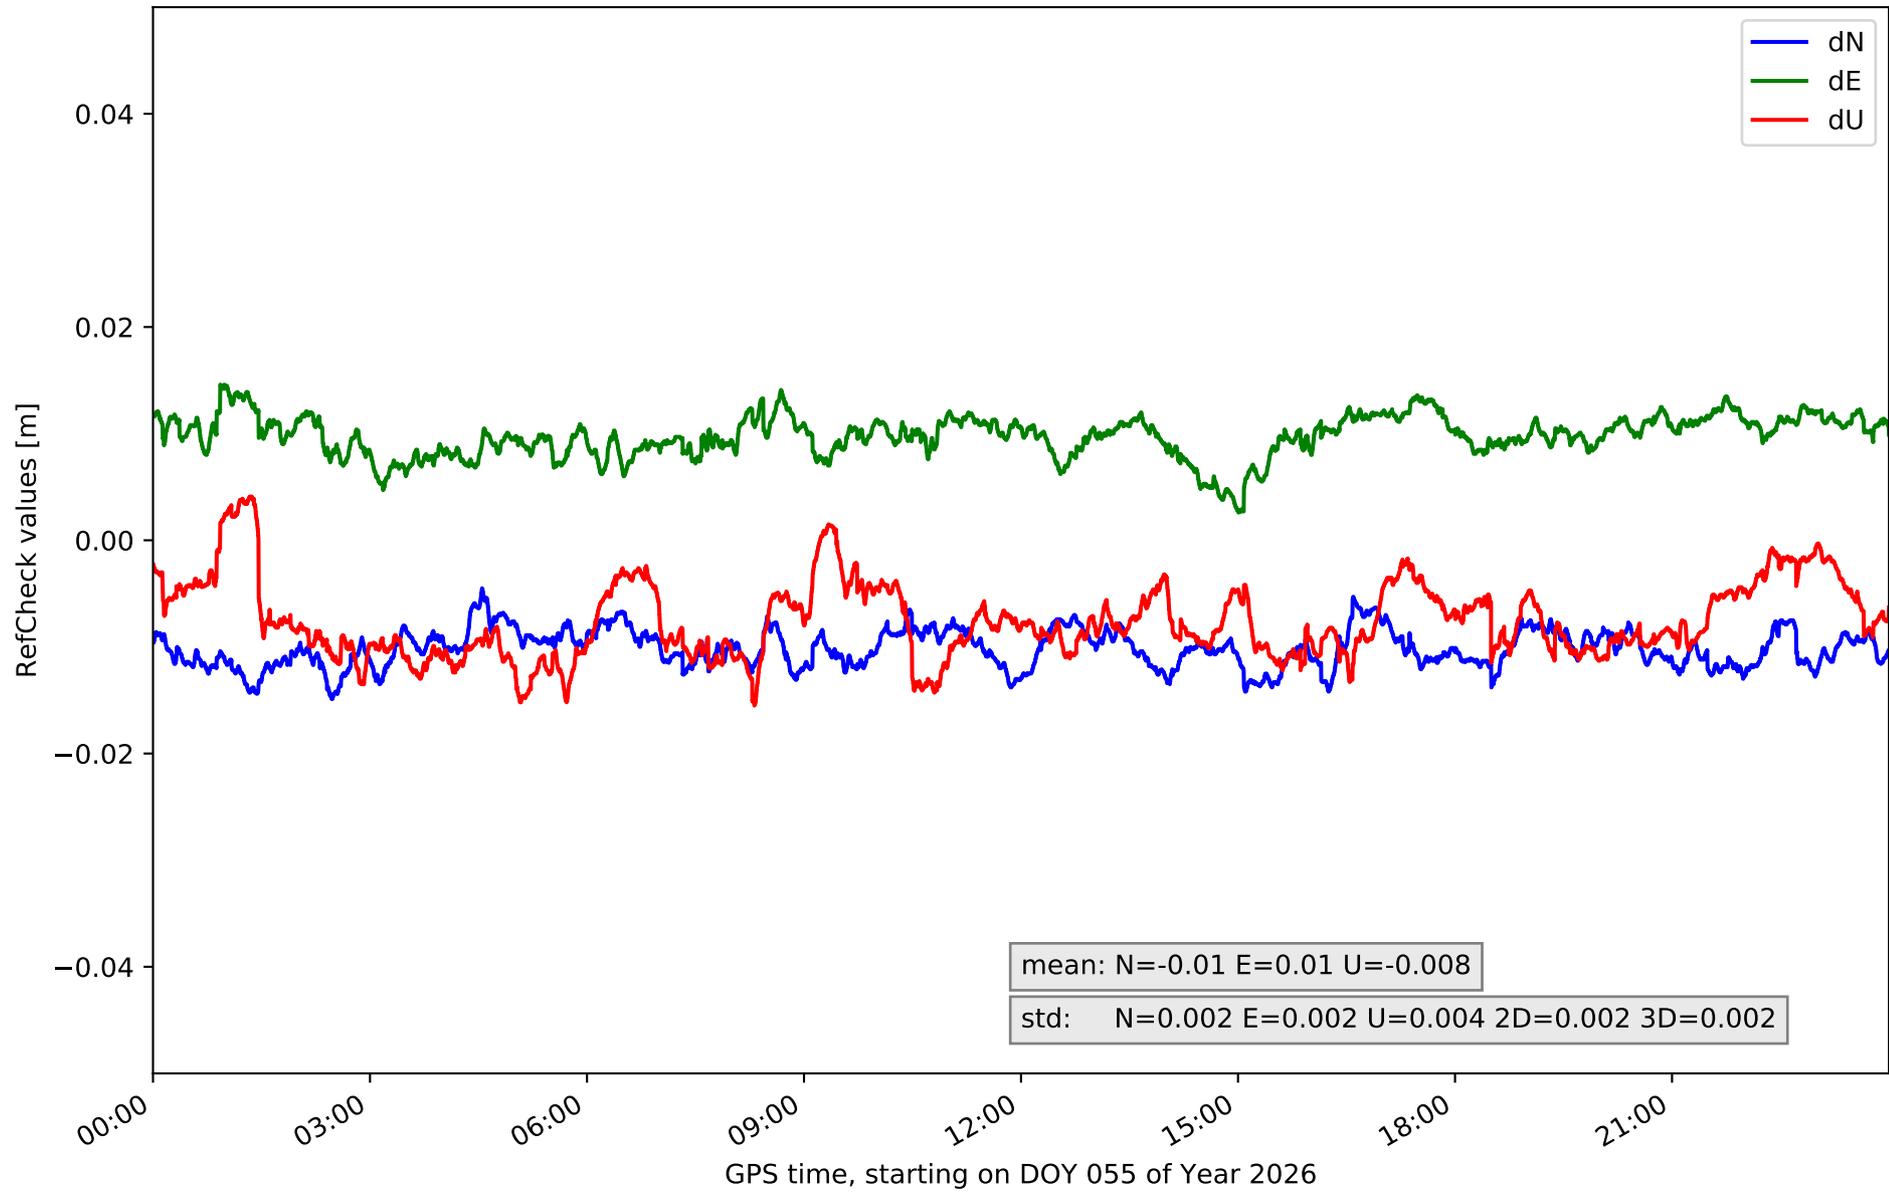


### RefCheck for station LRES in network N32T

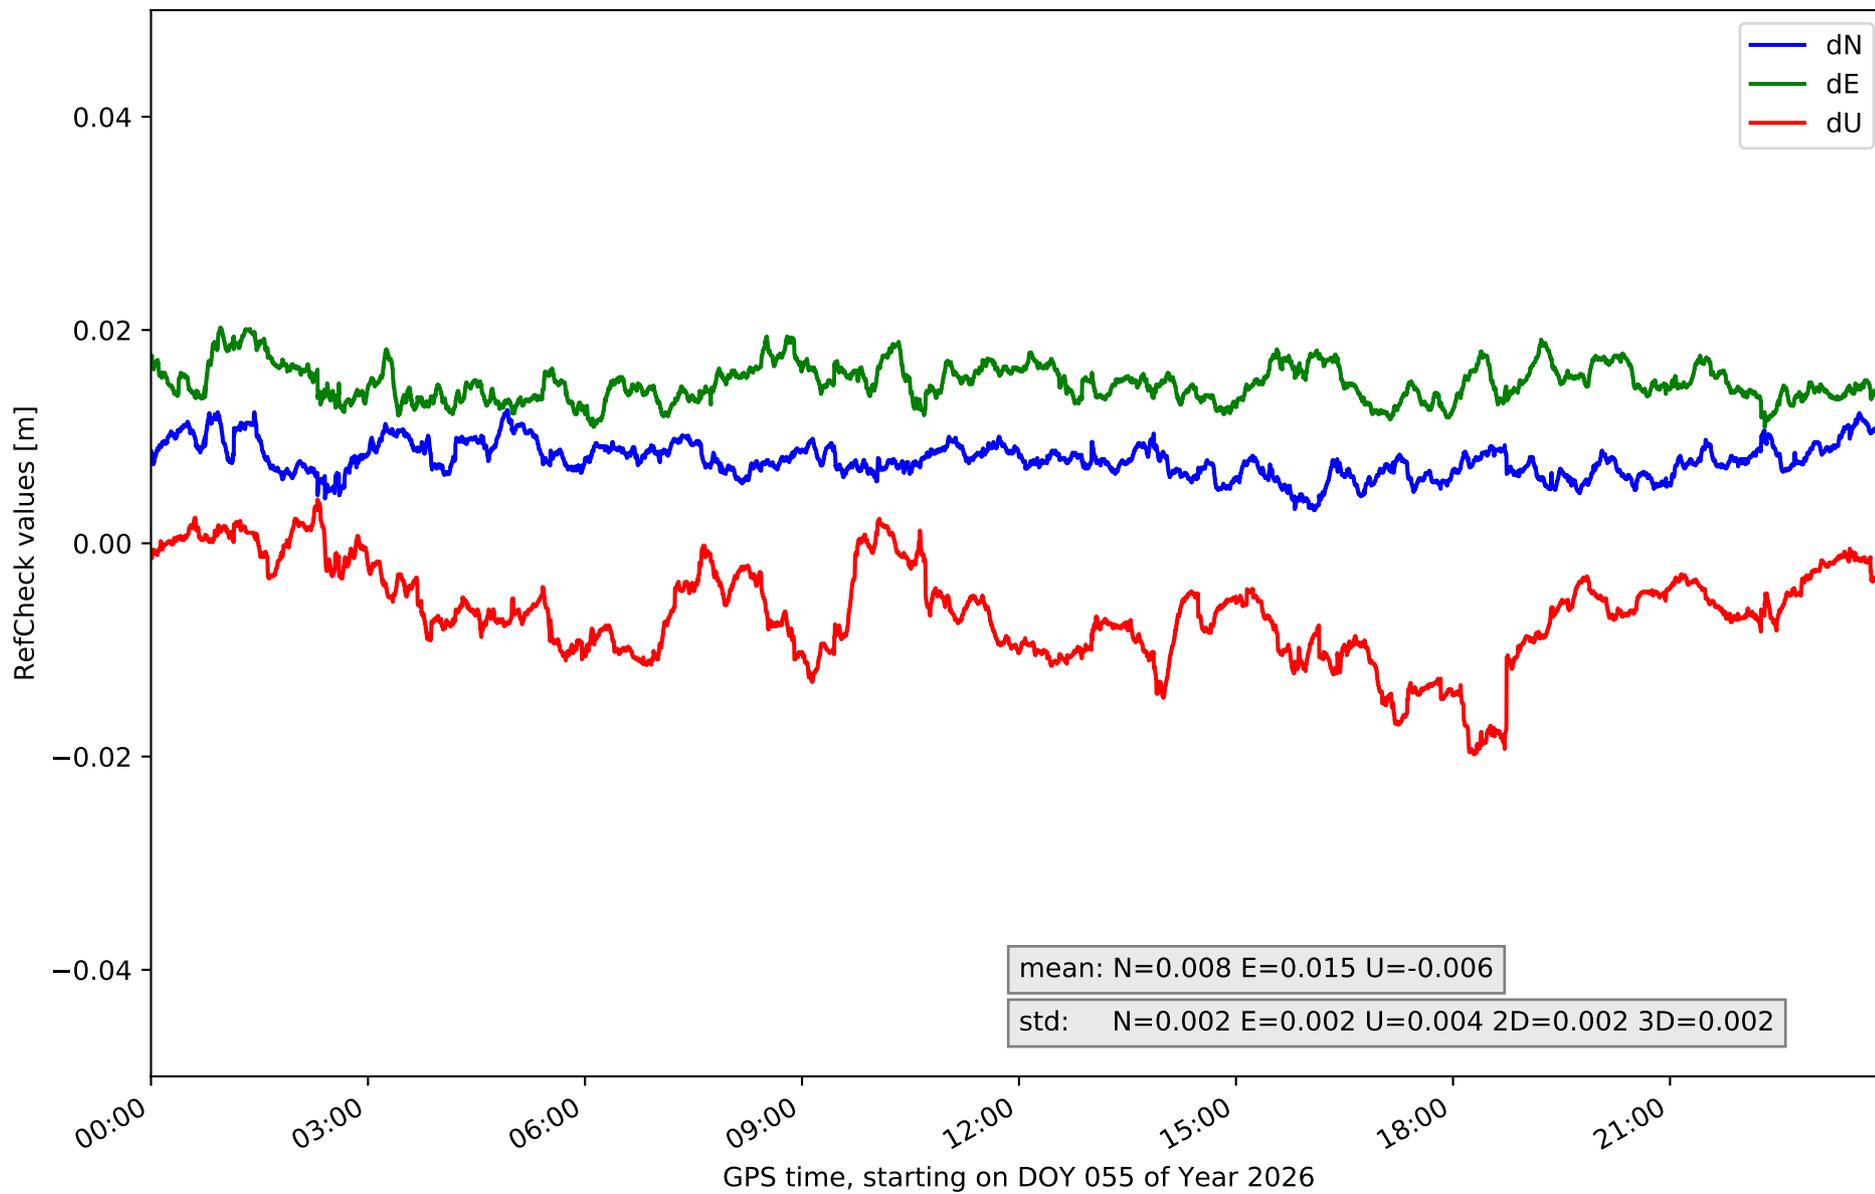


# RefCheck for station TN01 in network N32T

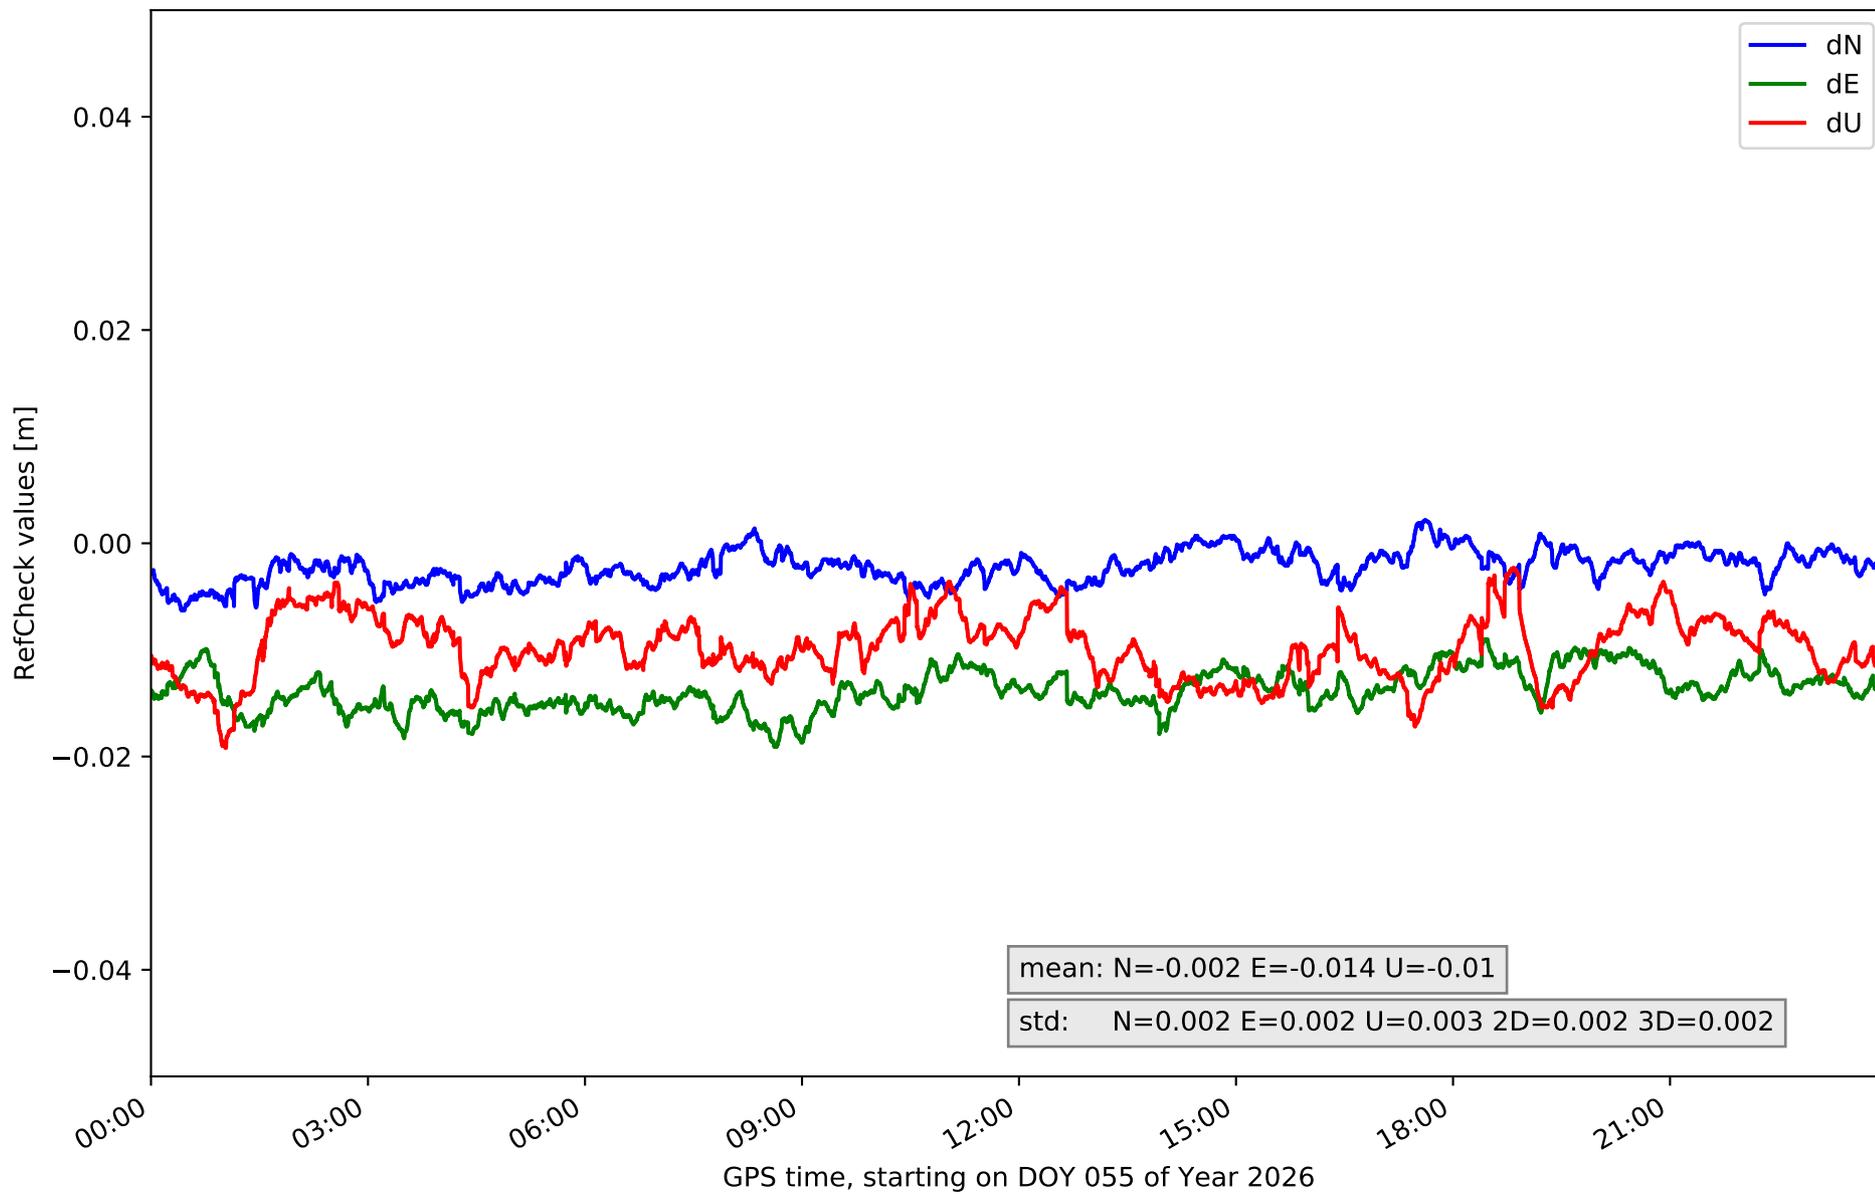


# RefCheck for station TN02 in network N32T

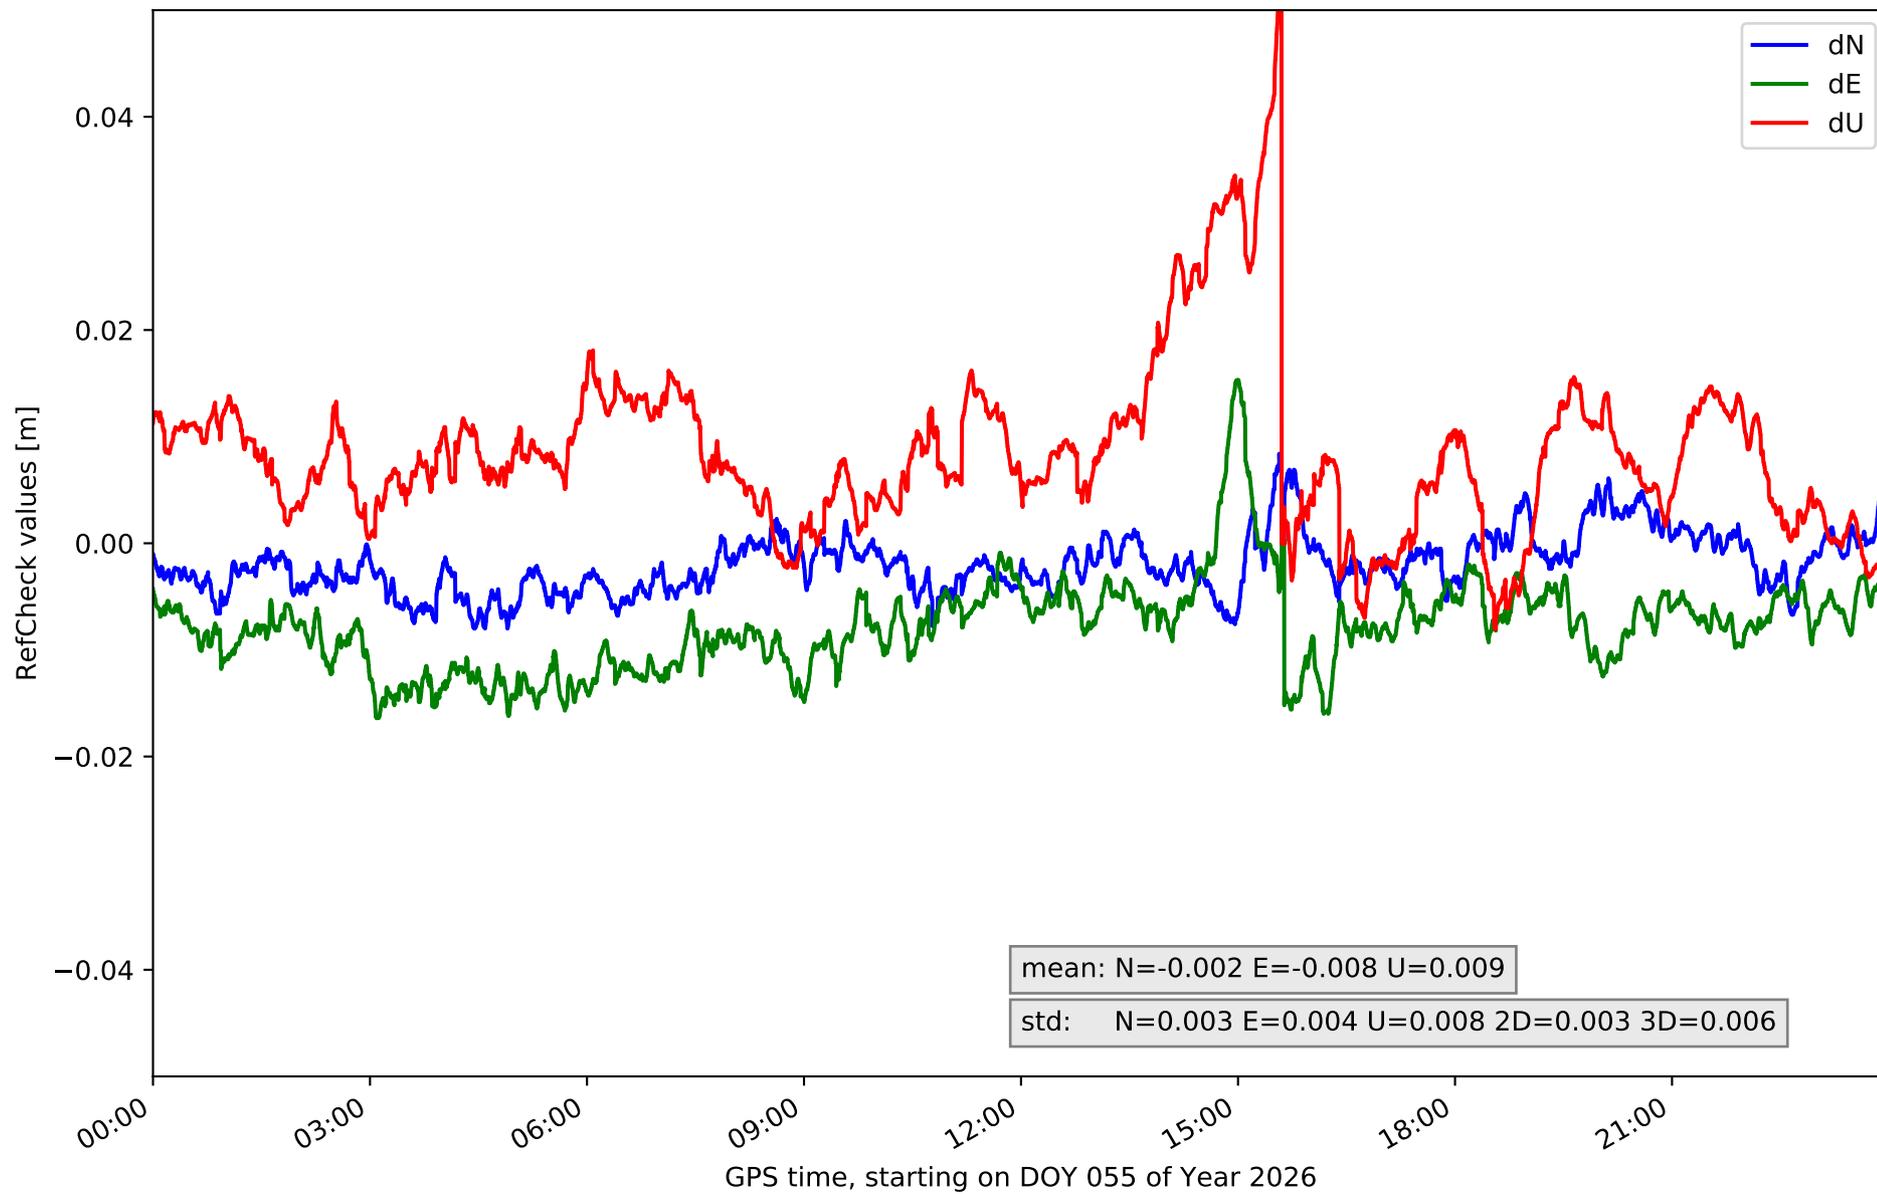


# RefCheck for station TN03 in network N32T

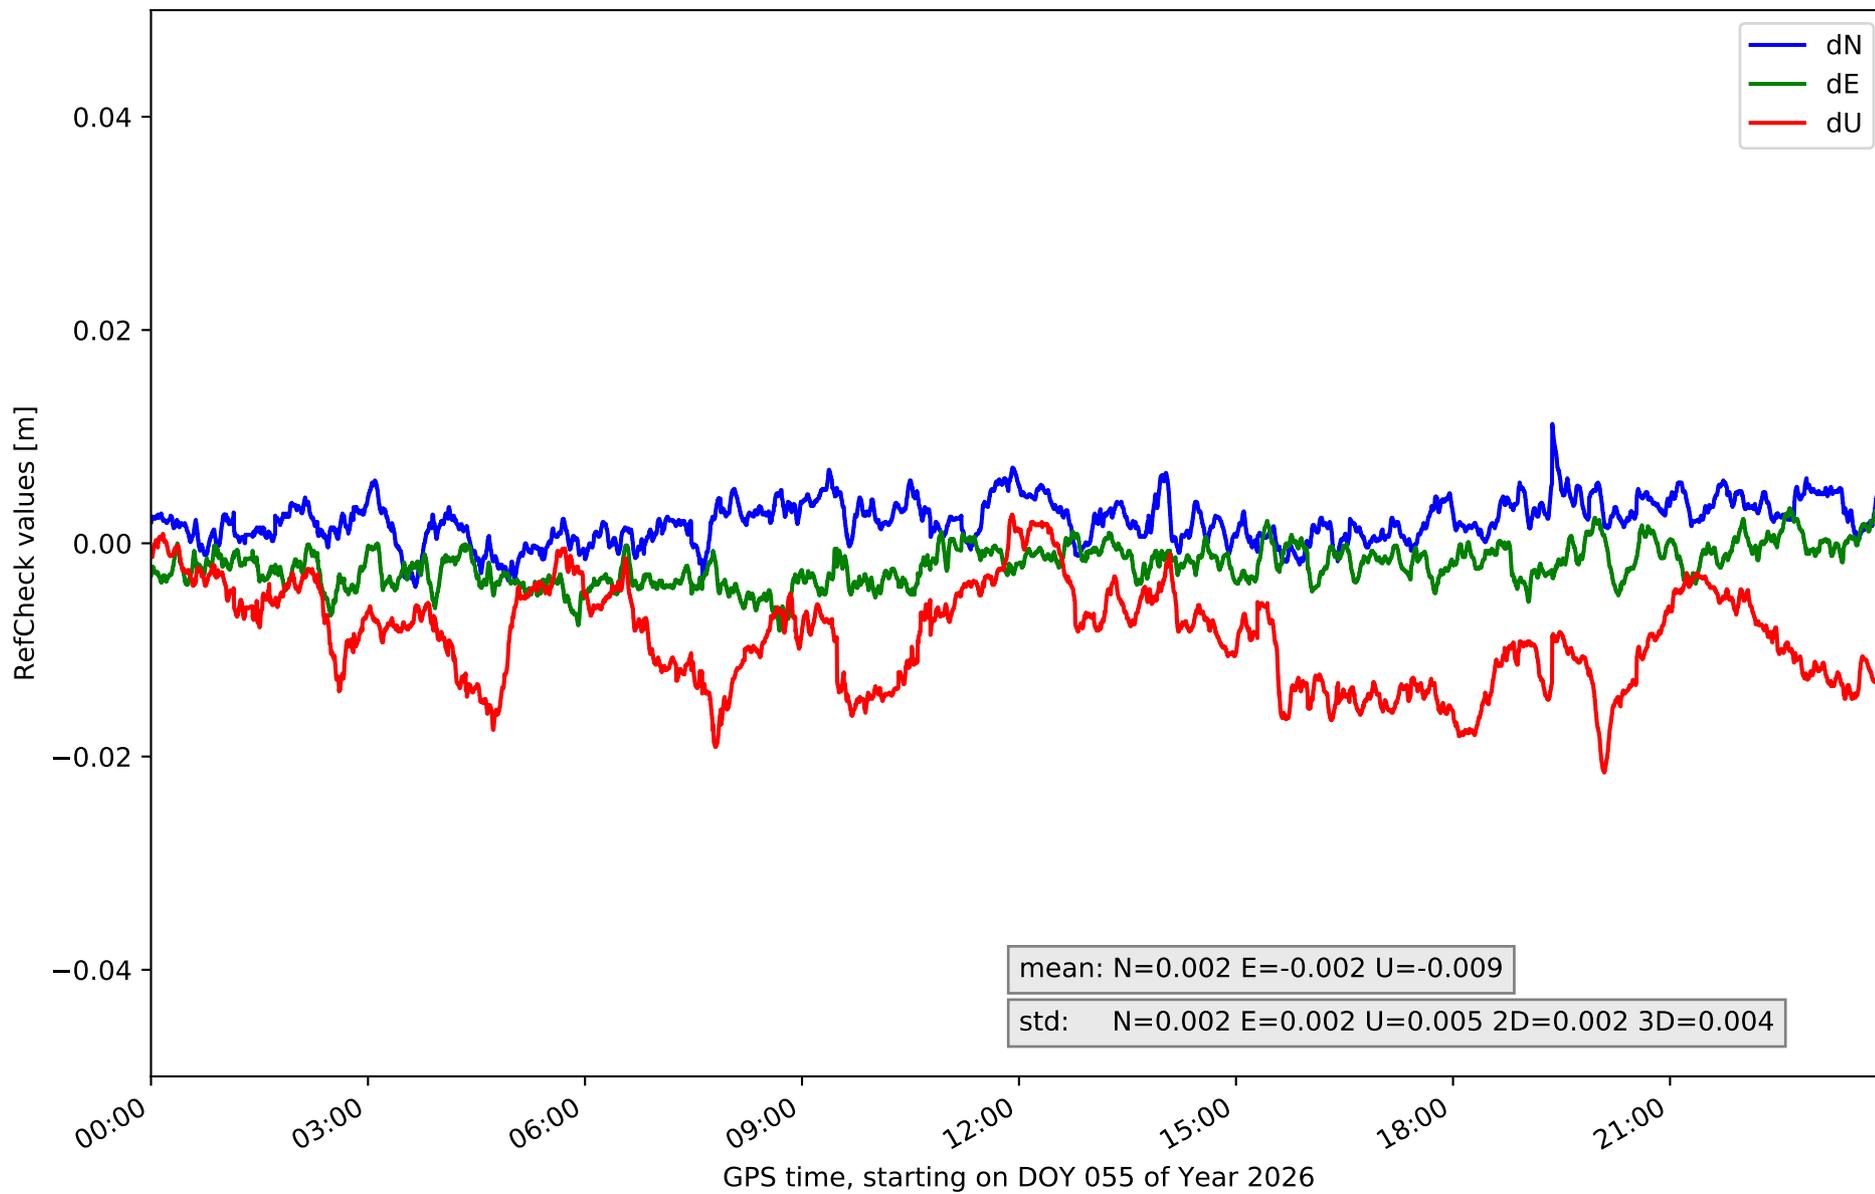


### RefCheck for station TN06 in network N32T

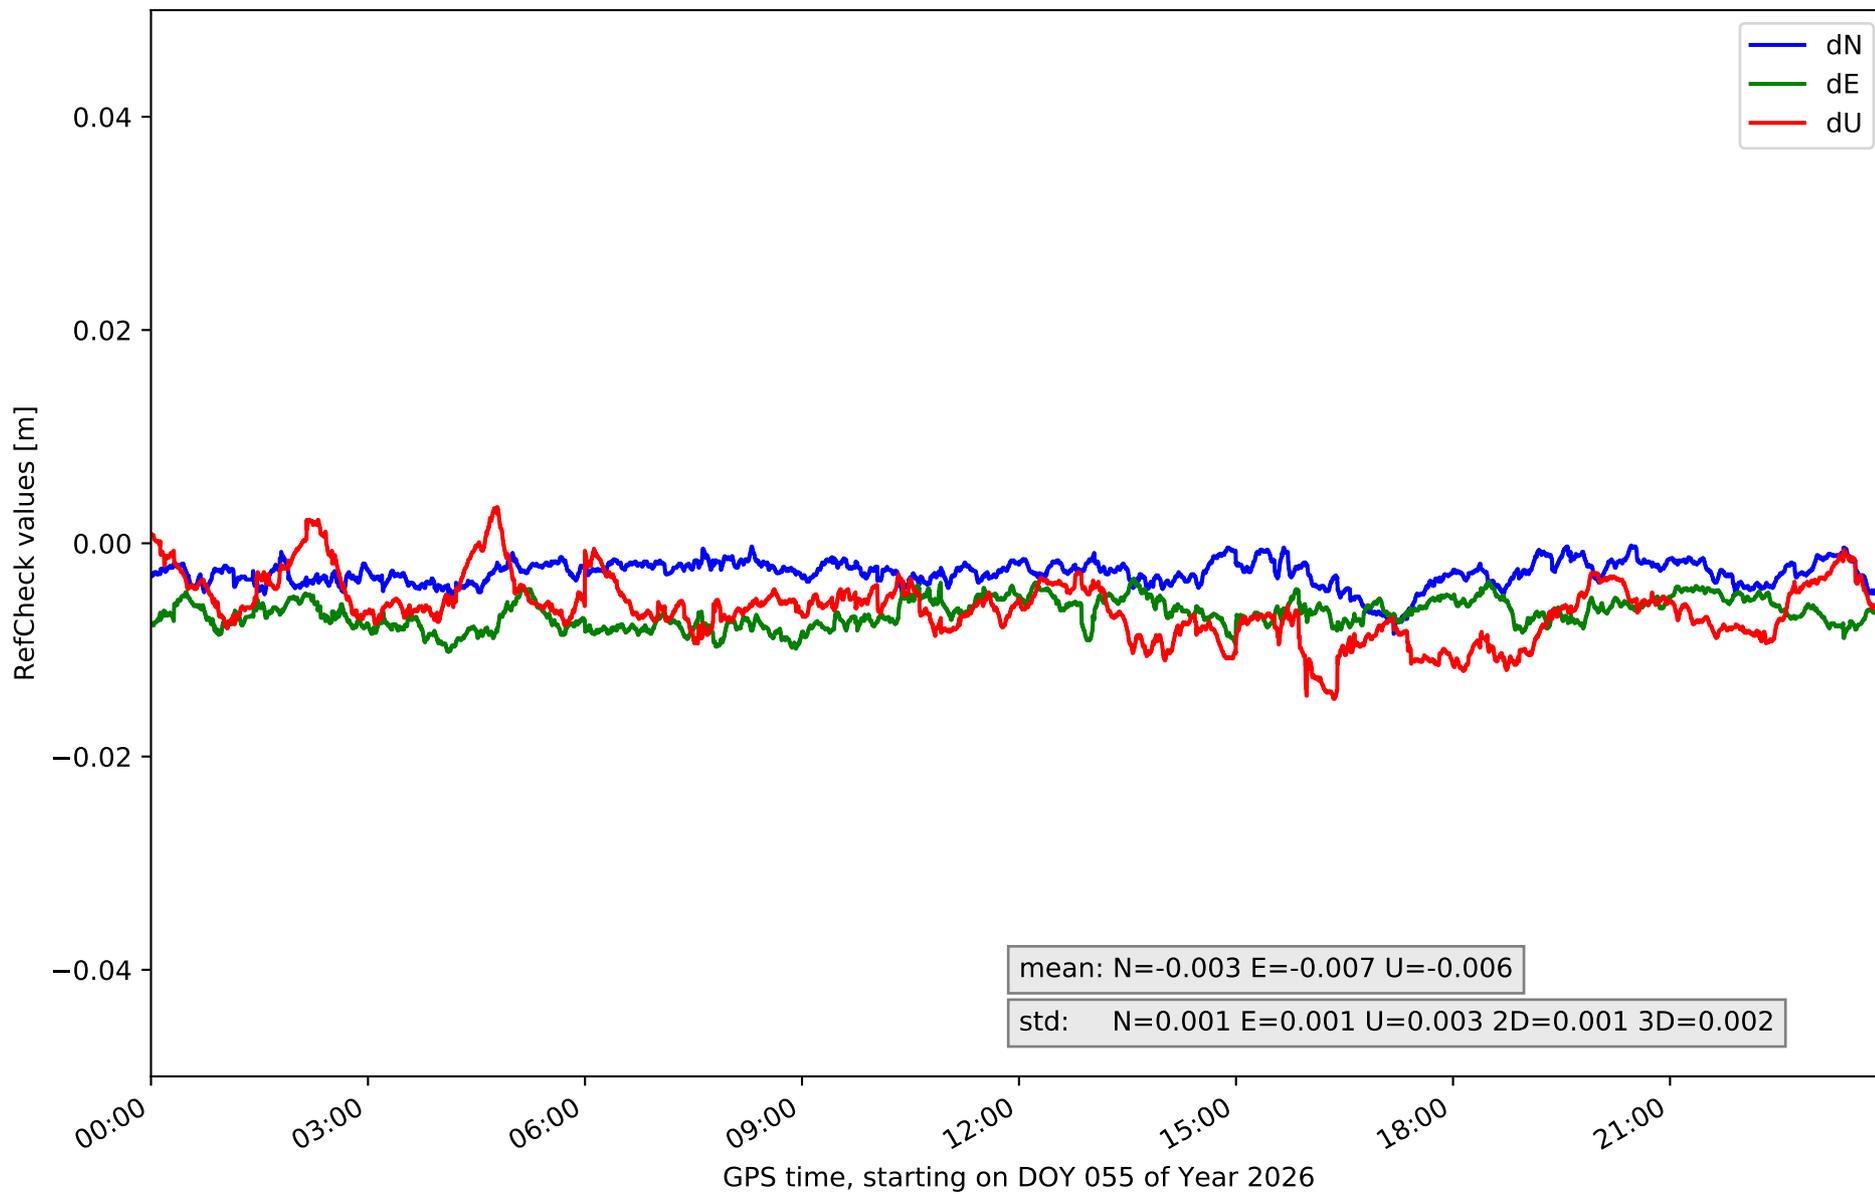

# RefCheck for station TN09 in network N32T

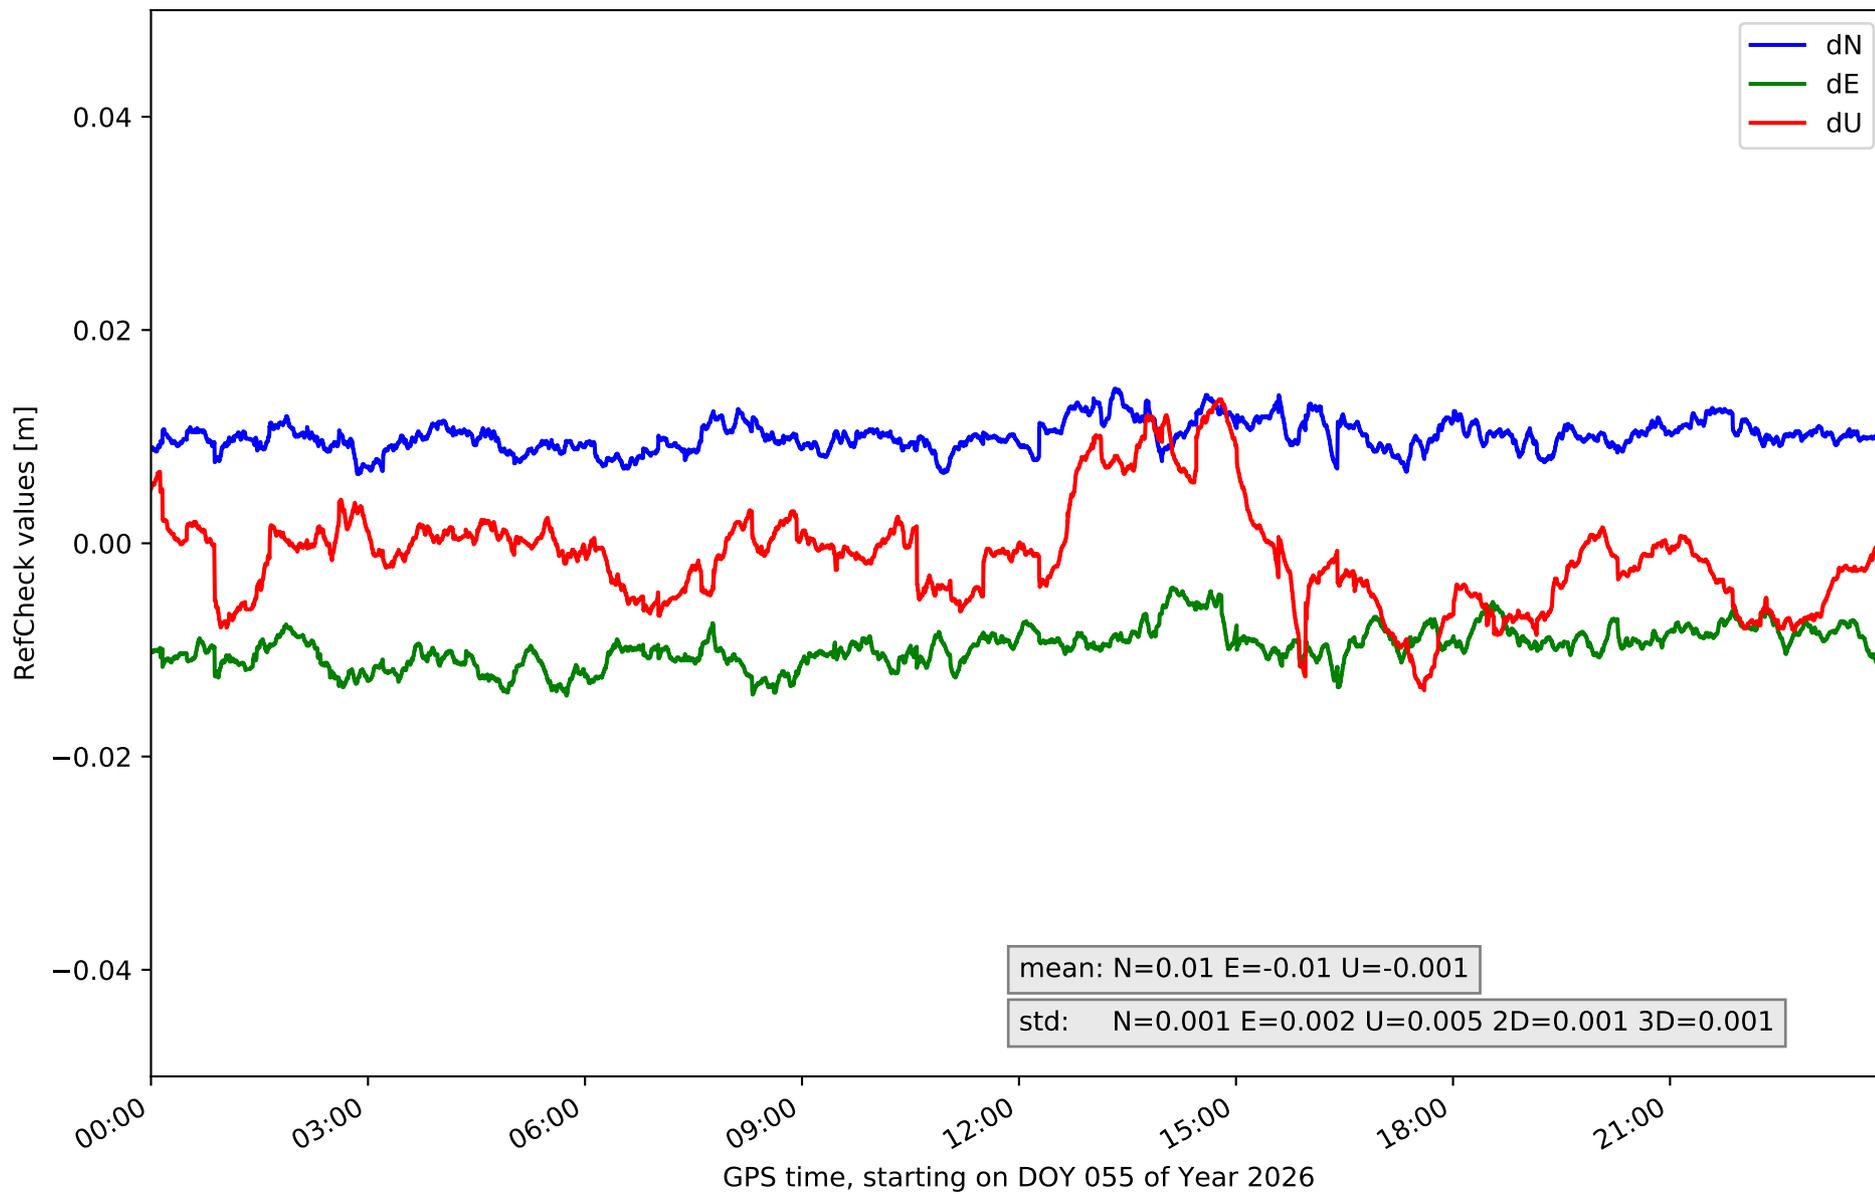

# RefCheck for station TE11 in network N32T

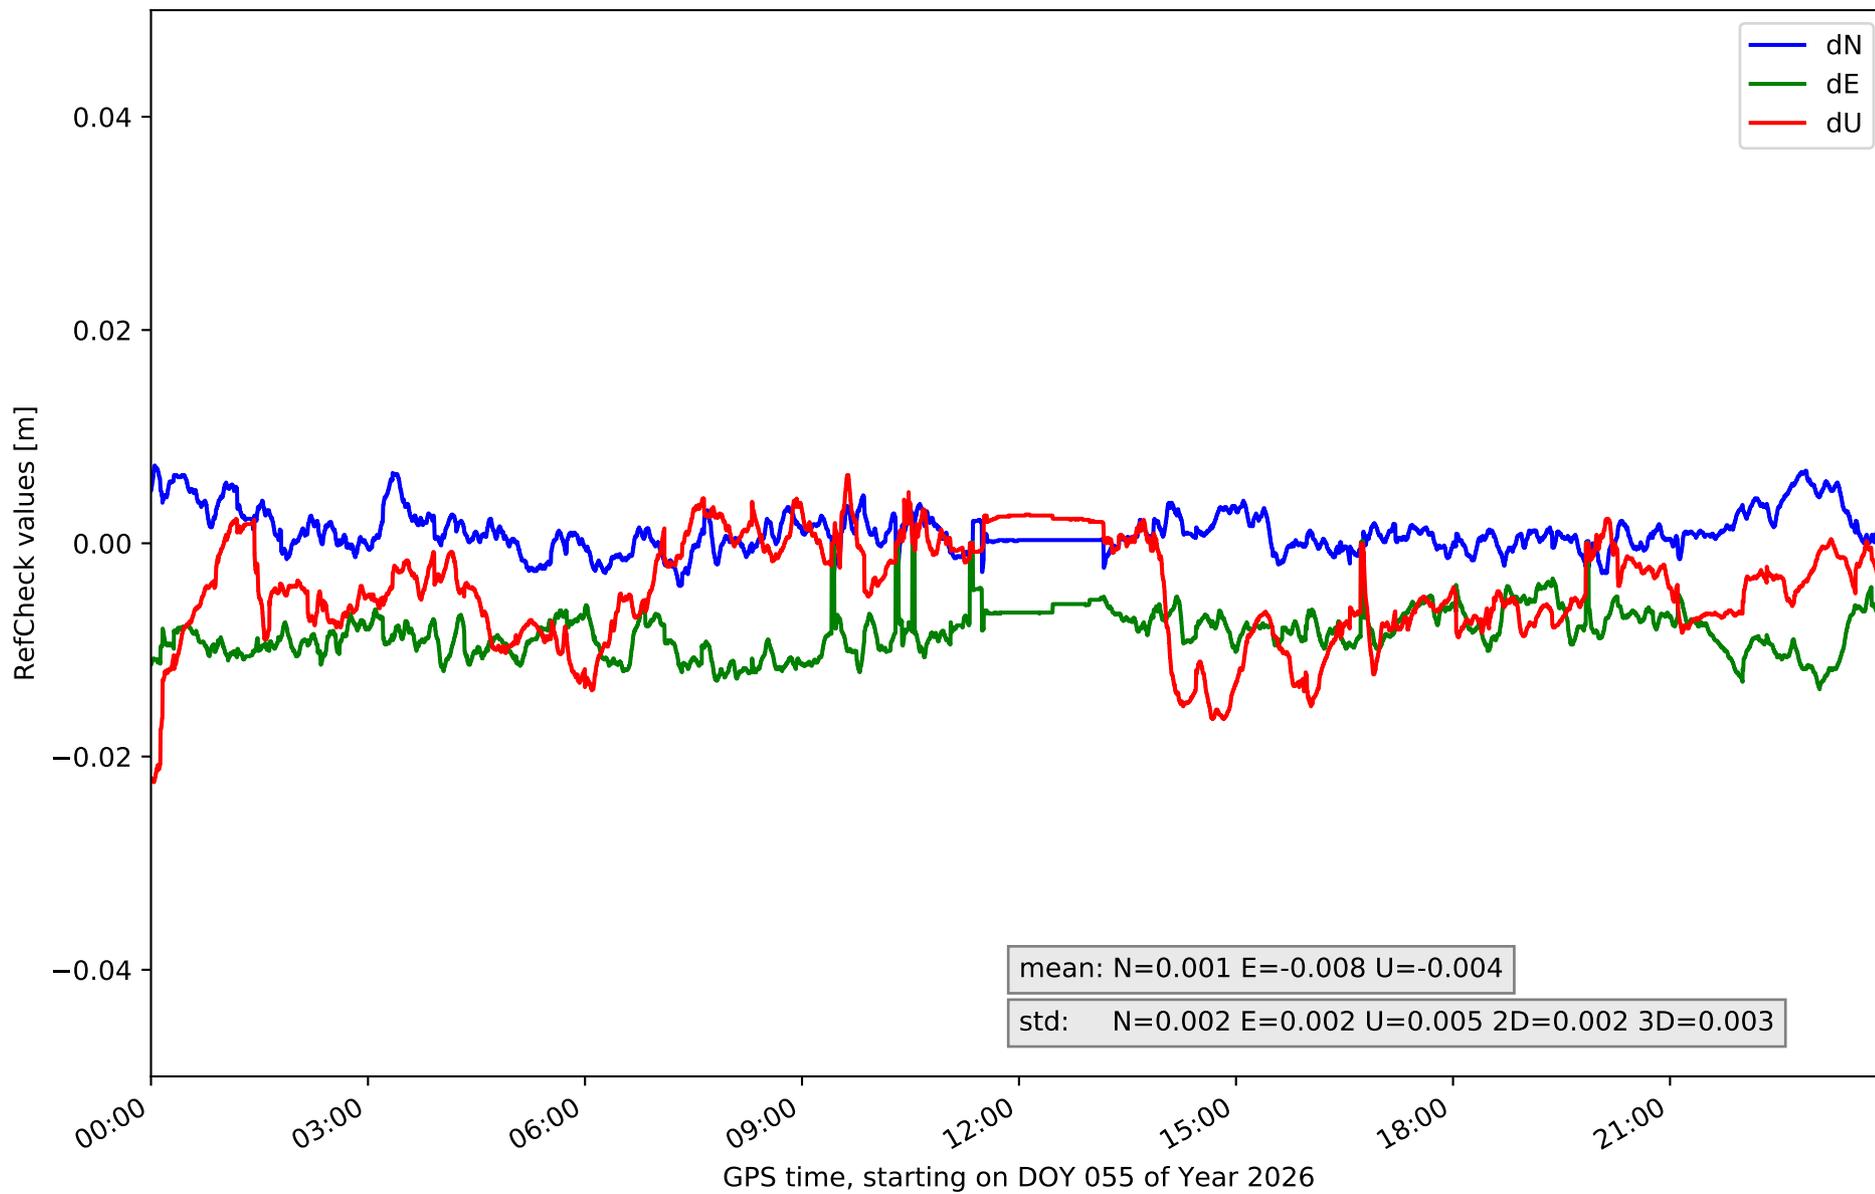

## RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.002	0.008	0.002	0.009	0.021	0.002	-0.008	0.014	0.004	0.002	0.002	56037	99.6	2404	4.3
EH02	-0.003	<b>0.017</b>	0.002	-0.0	<b>0.035</b>	0.003	-0.0	0.049	<b>0.008</b>	<b>0.003</b>	<b>0.008</b>	56206	99.9	<b>54884</b>	<b>97.5</b>
GOM1	-0.006	0.001	0.001	-0.013	-0.004	0.002	<b>-0.025</b>	-0.001	0.004	0.002	0.003	23442	41.6	1427	2.5
GOME	-0.001	0.005	0.001	-0.005	0.005	0.002	-0.003	0.015	0.003	0.001	0.002	0	0.0	0	0.0
IZAN	-0.005	0.003	0.001	-0.013	-0.003	0.002	-0.016	0.003	0.003	0.002	0.003	25110	44.6	260	0.5
LP01	<b>-0.017</b>	-0.007	0.001	0.002	0.012	0.002	-0.001	0.018	0.003	0.002	0.002	55567	98.7	2941	5.2
LP03	-0.008	0.001	0.002	-0.004	0.009	0.002	-0.007	0.013	0.004	0.002	0.002	0	0.0	0	0.0
LPAL	-0.015	-0.004	0.002	0.003	0.015	0.002	-0.015	0.004	0.004	0.002	0.002	55634	98.8	774	1.4
LRES	0.003	0.013	0.002	0.011	0.02	0.002	-0.02	0.004	0.004	0.002	0.002	<b>56287</b>	<b>100.0</b>	15244	27.1
TN01	-0.006	0.002	0.002	<b>-0.019</b>	-0.009	0.002	-0.019	-0.002	0.003	0.002	0.002	55980	99.5	7862	14.0
TN02	-0.008	0.008	<b>0.003</b>	-0.016	0.015	<b>0.004</b>	-0.008	<b>0.06</b>	<b>0.008</b>	<b>0.003</b>	0.006	21053	37.4	4633	8.2
TN03	-0.004	0.011	0.002	-0.008	0.003	0.002	-0.021	0.003	0.005	0.002	0.004	51	0.1	168	0.3
TN06	-0.009	-0.0	0.001	-0.01	-0.003	0.001	-0.015	0.003	0.003	0.001	0.002	1061	1.9	0	0.0
TN09	0.006	0.015	0.001	-0.014	-0.004	0.002	-0.014	0.013	0.005	0.001	0.001	56273	<b>100.0</b>	0	0.0
TE11	-0.004	0.007	0.002	-0.014	0.0	0.002	-0.022	0.006	0.005	0.002	0.003	16854	29.9	469	0.8
<b>Mean</b>	<b>-0.005</b>	<b>0.005</b>	<b>0.002</b>	<b>-0.006</b>	<b>0.007</b>	<b>0.002</b>	<b>-0.013</b>	<b>0.013</b>	<b>0.004</b>	<b>0.002</b>	<b>0.003</b>	<b>31970.3</b>	<b>56.8</b>	<b>6071.1</b>	<b>10.8</b>
<b>Min/Max</b>	<b>-0.017</b>	<b>0.017</b>	<b>0.003</b>	<b>-0.019</b>	<b>0.035</b>	<b>0.004</b>	<b>-0.025</b>	<b>0.06</b>	<b>0.008</b>	<b>0.003</b>	<b>0.008</b>	<b>56287</b>	<b>100.0</b>	<b>54884</b>	<b>97.5</b>

## fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	93.6	93.8	92.2	94.1	93.5
considering satellites with dual-frequency fixed	92.1	92.4	90.8	93.0	91.9
considering all signals separately	91.9	92.5	90.8	93.3	89.5