

summary for network NT32

timeperiod chosen: from 2026-02-26-00:00:00 until 2026-02-26-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.2 seconds


average fixing percentage with threshold set to 0.3: 84.7 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: LEICA GR50	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

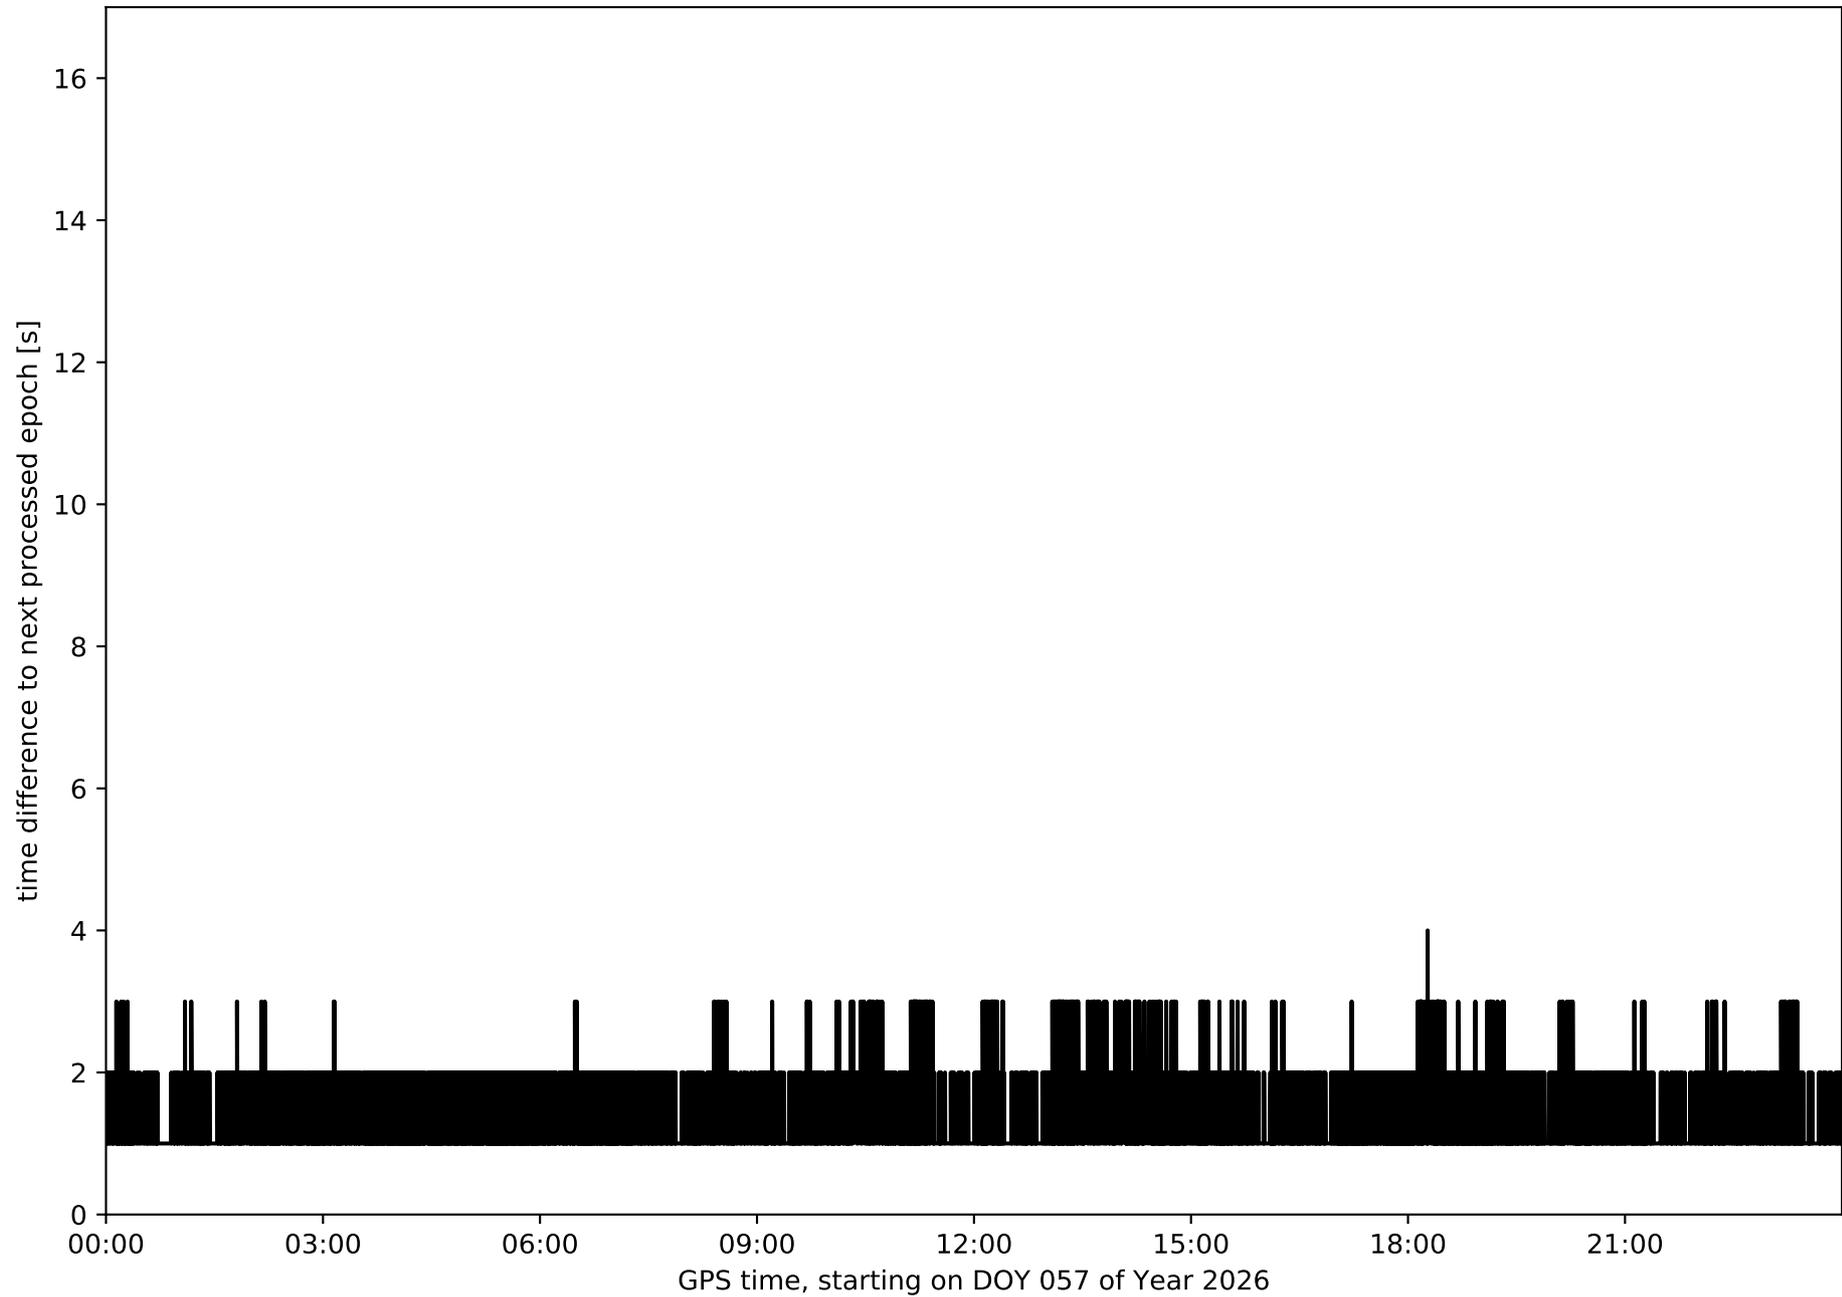


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

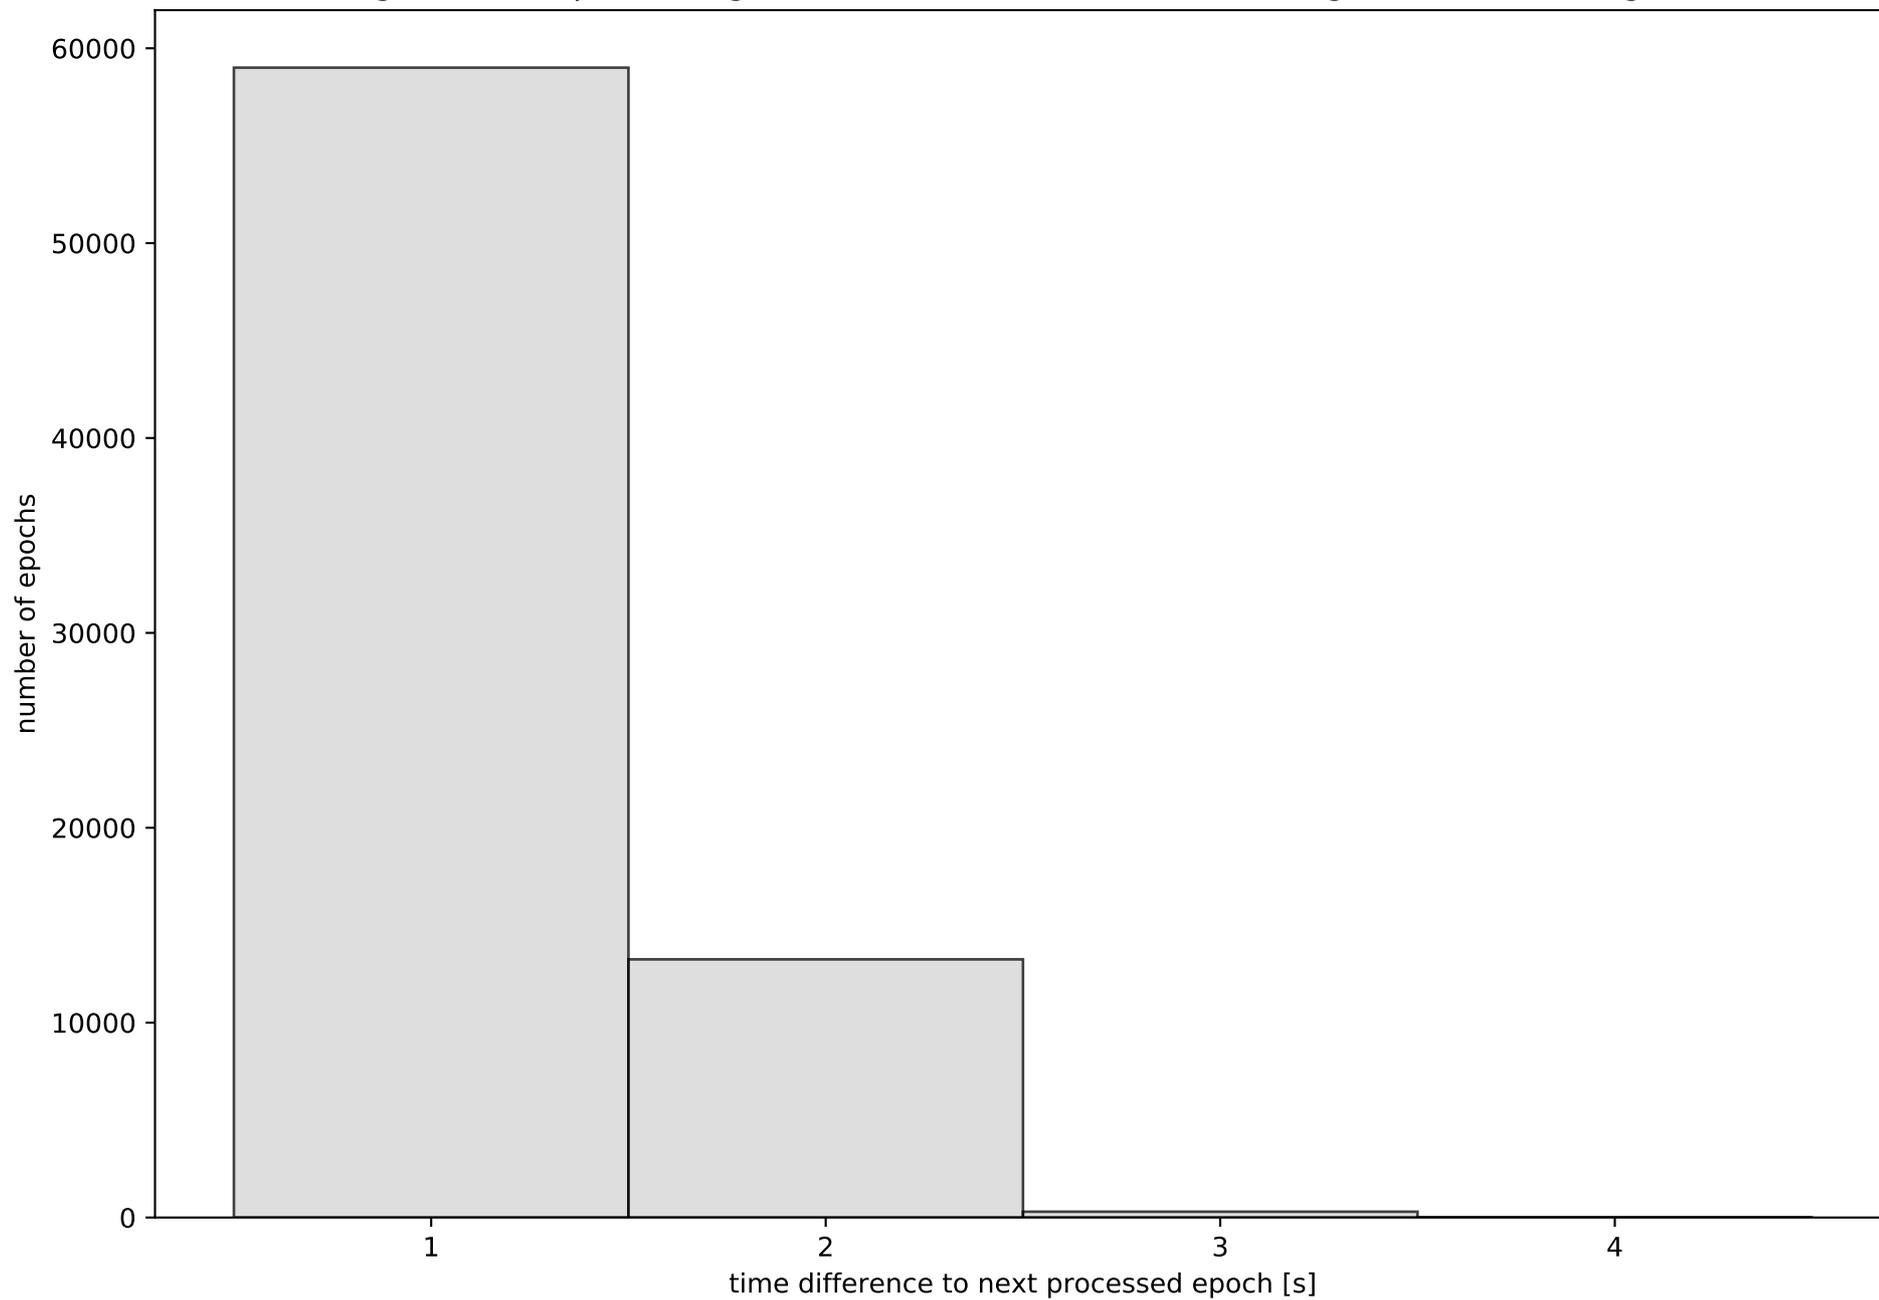


Network NT32 with threshold set to 0.3

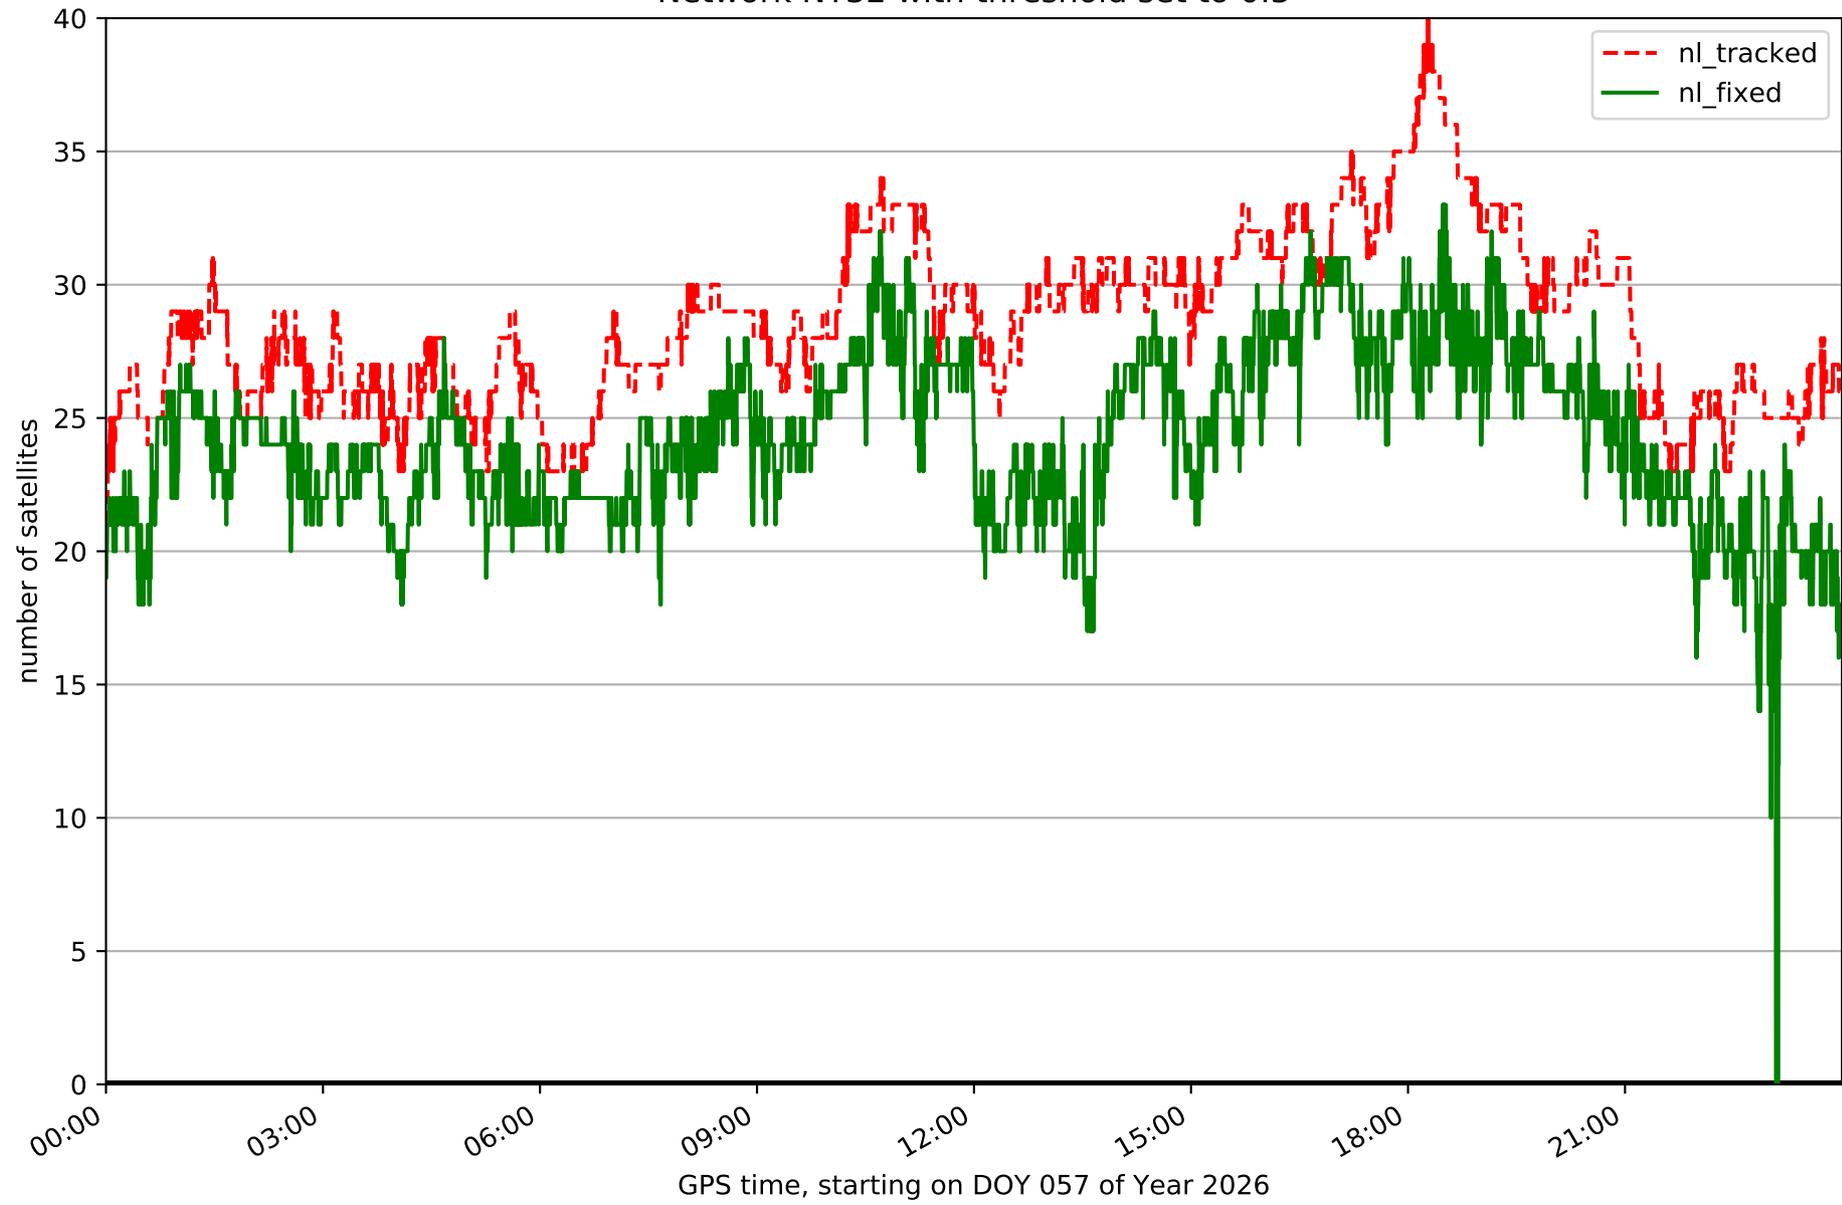


Fixing percentage of satellites in network NT32 with threshold set to 0.3

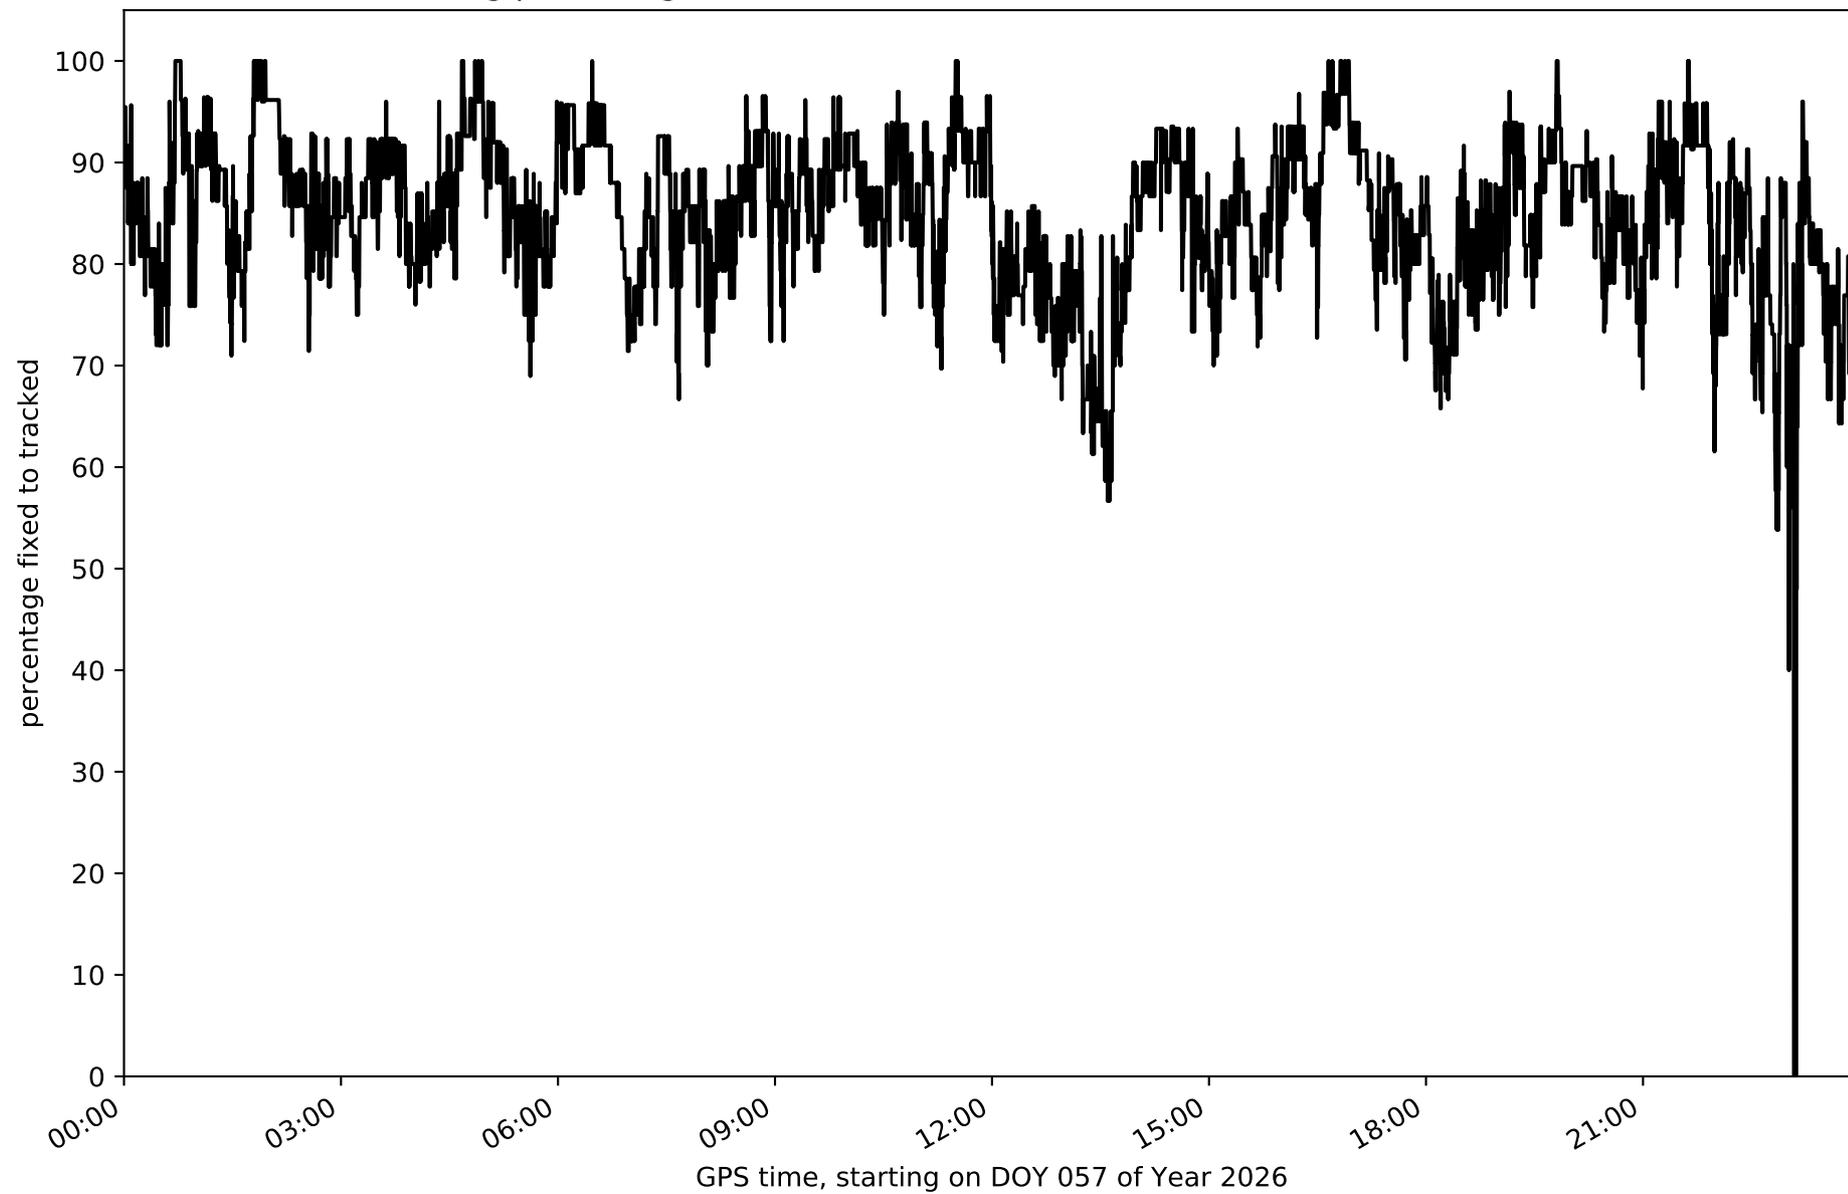


Network NT32 - only GPS with threshold set to 0.3

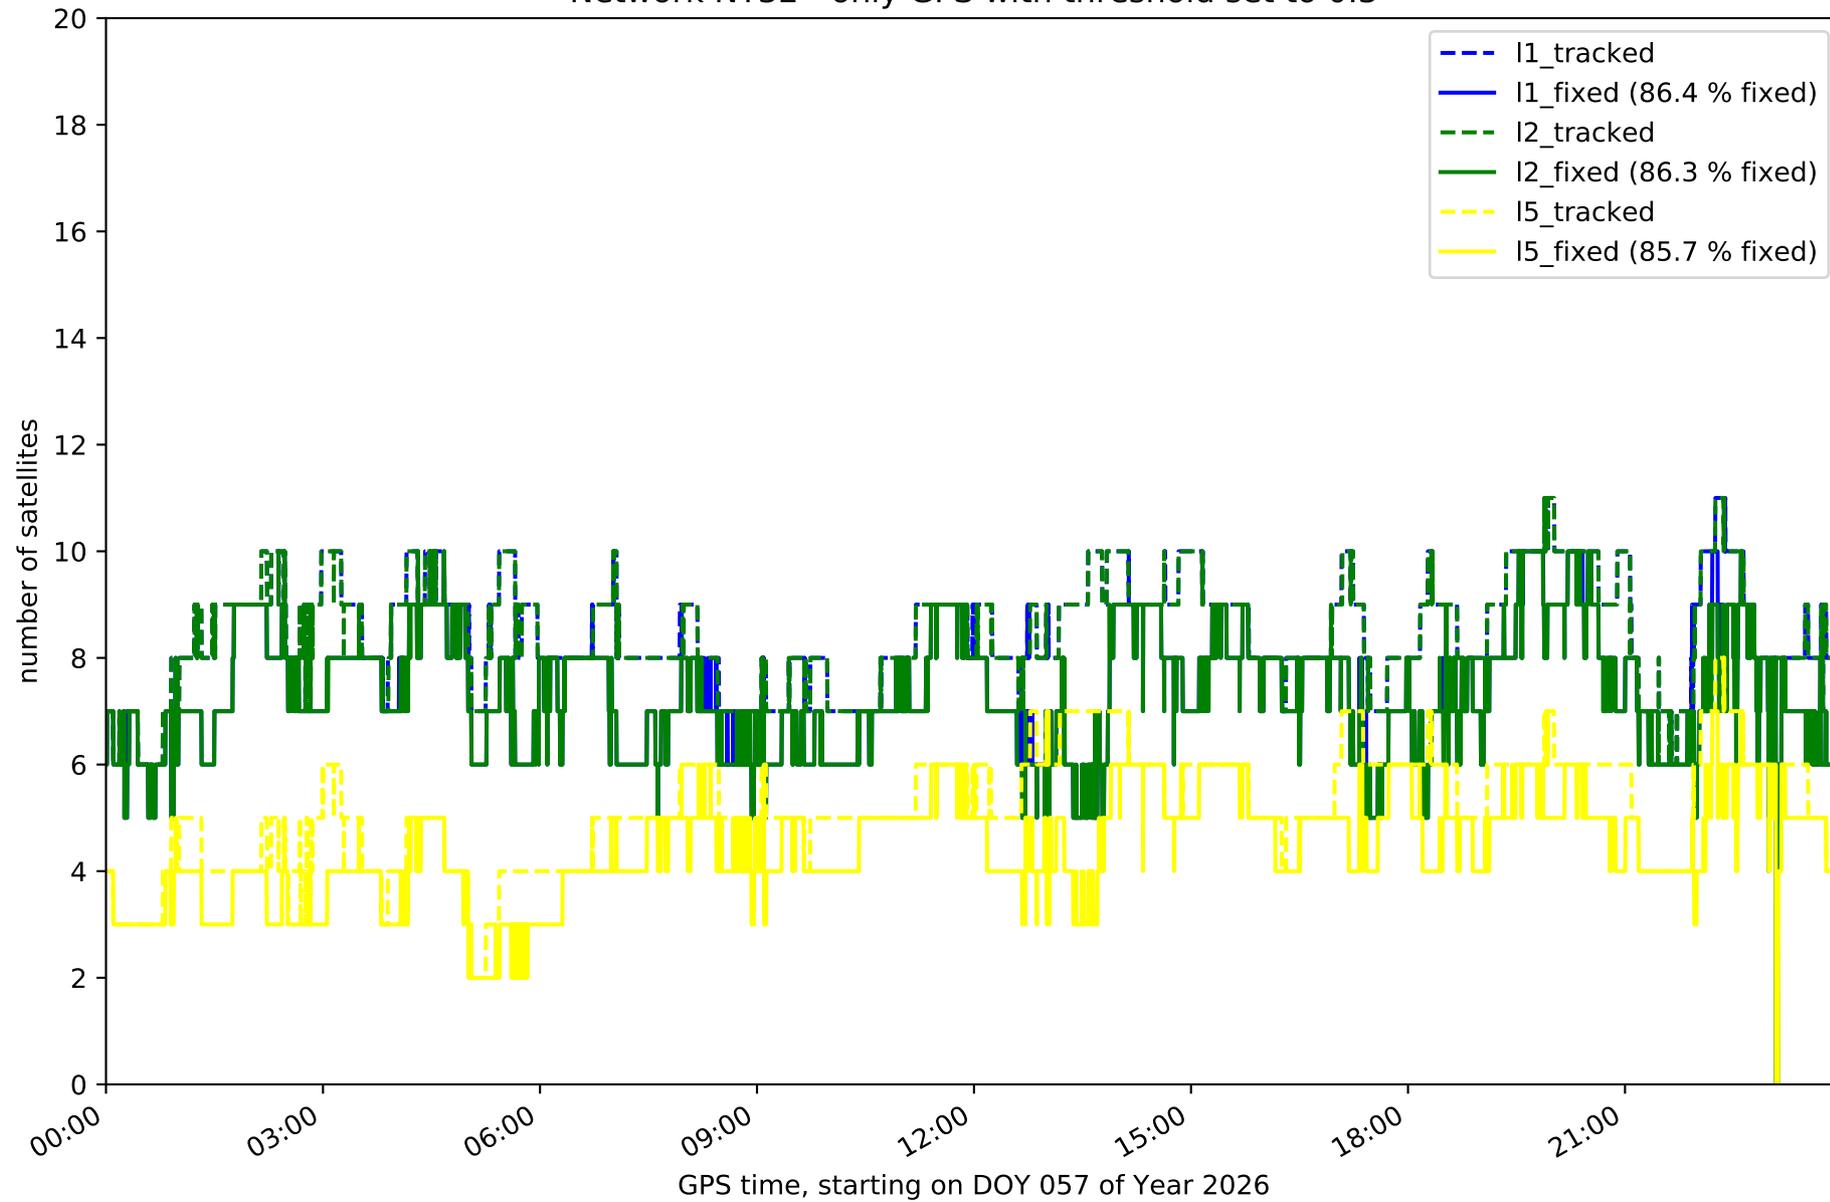


Network NT32 - only GLONASS with threshold set to 0.3

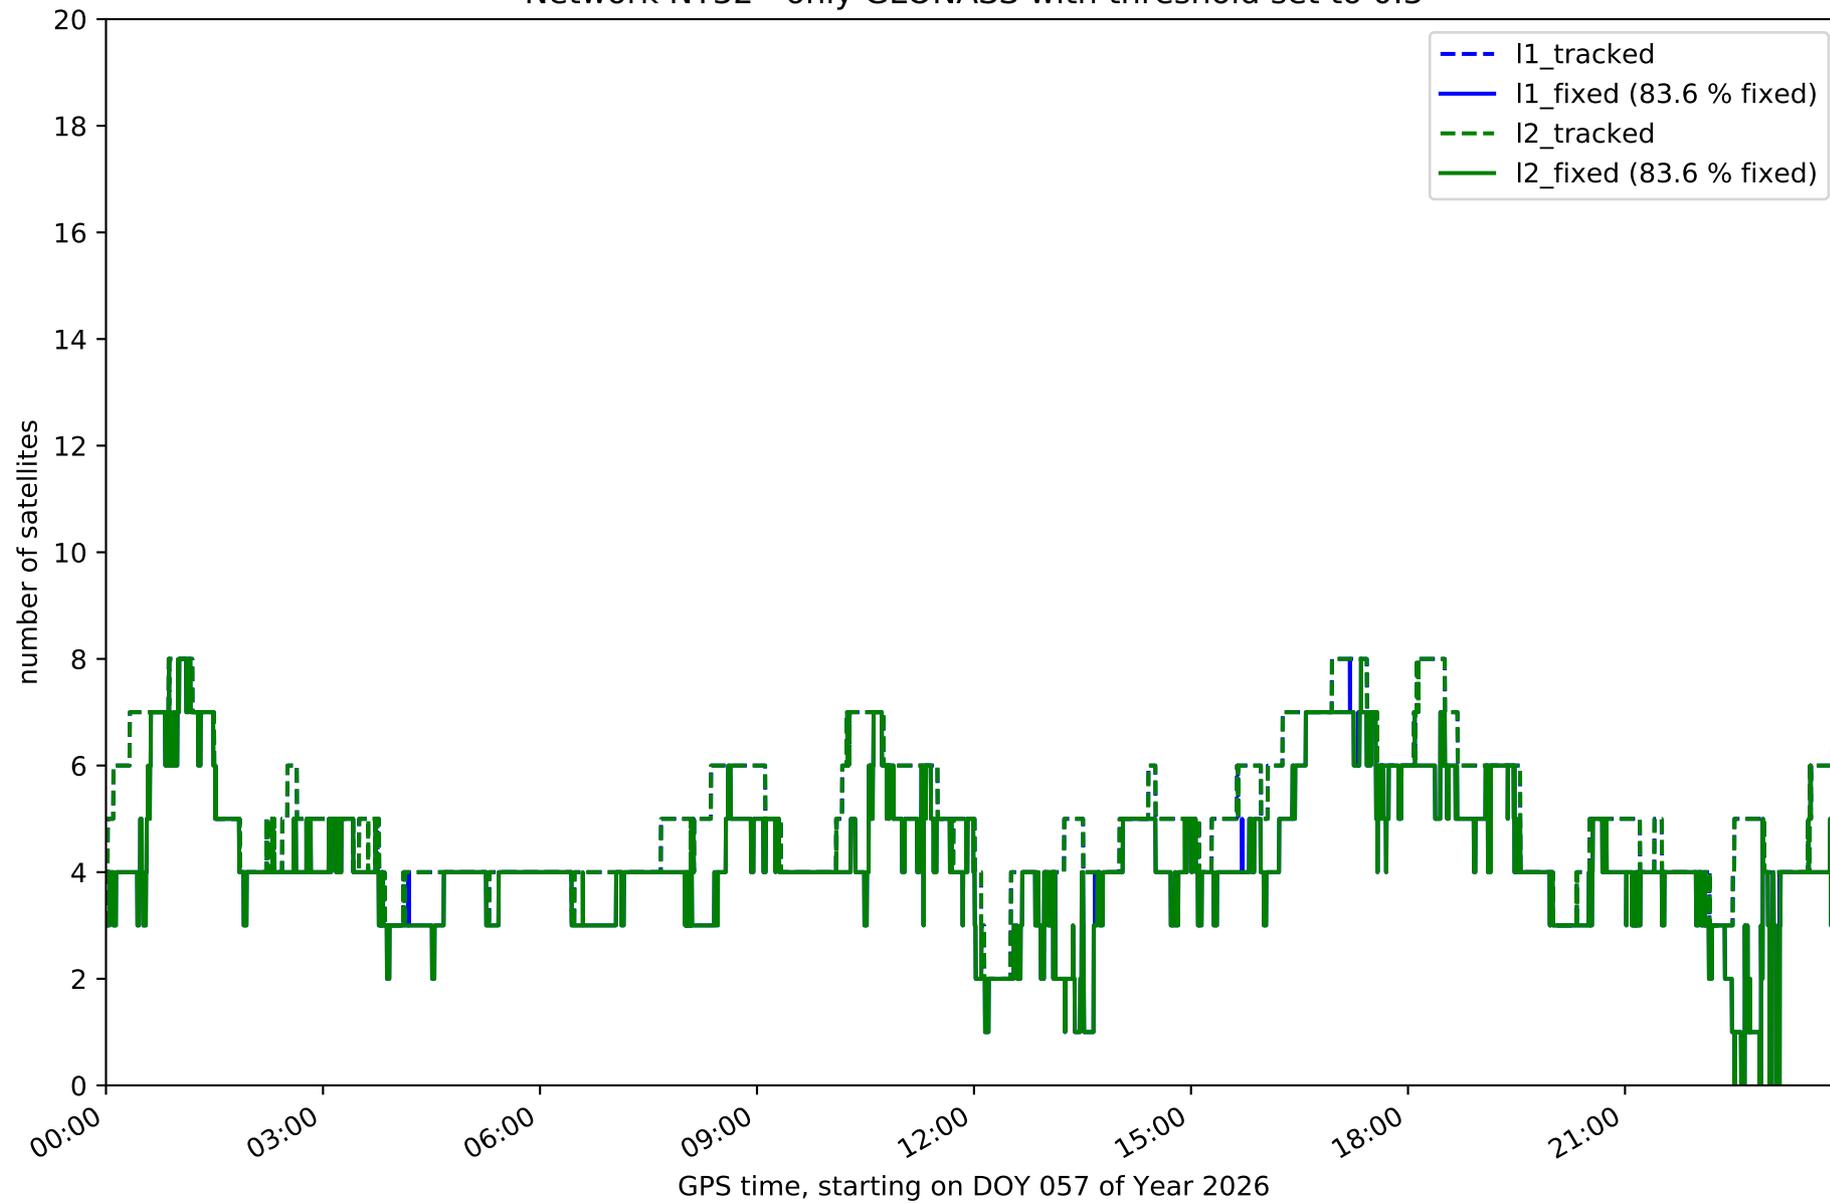


Network NT32 - only BDS with threshold set to 0.3

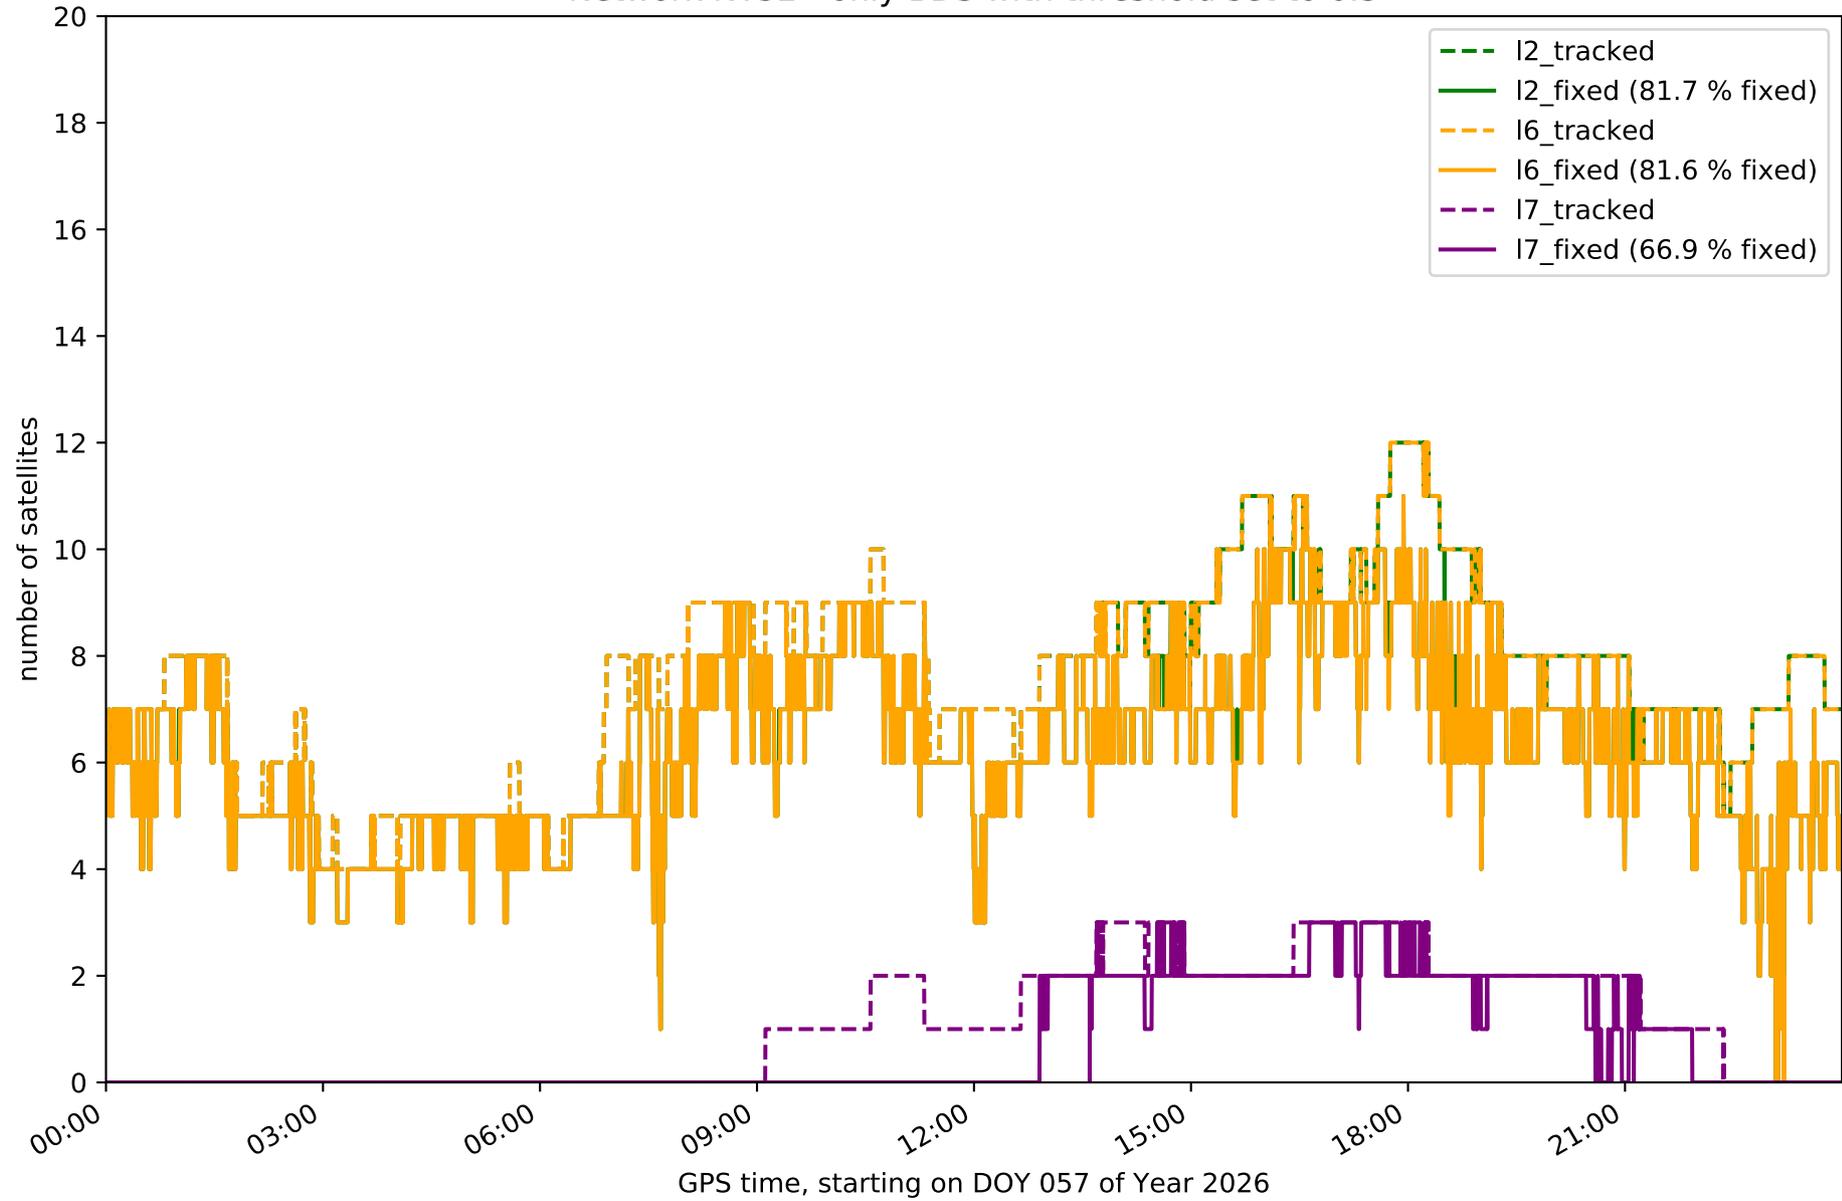


Network NT32 - only Galileo with threshold set to 0.3

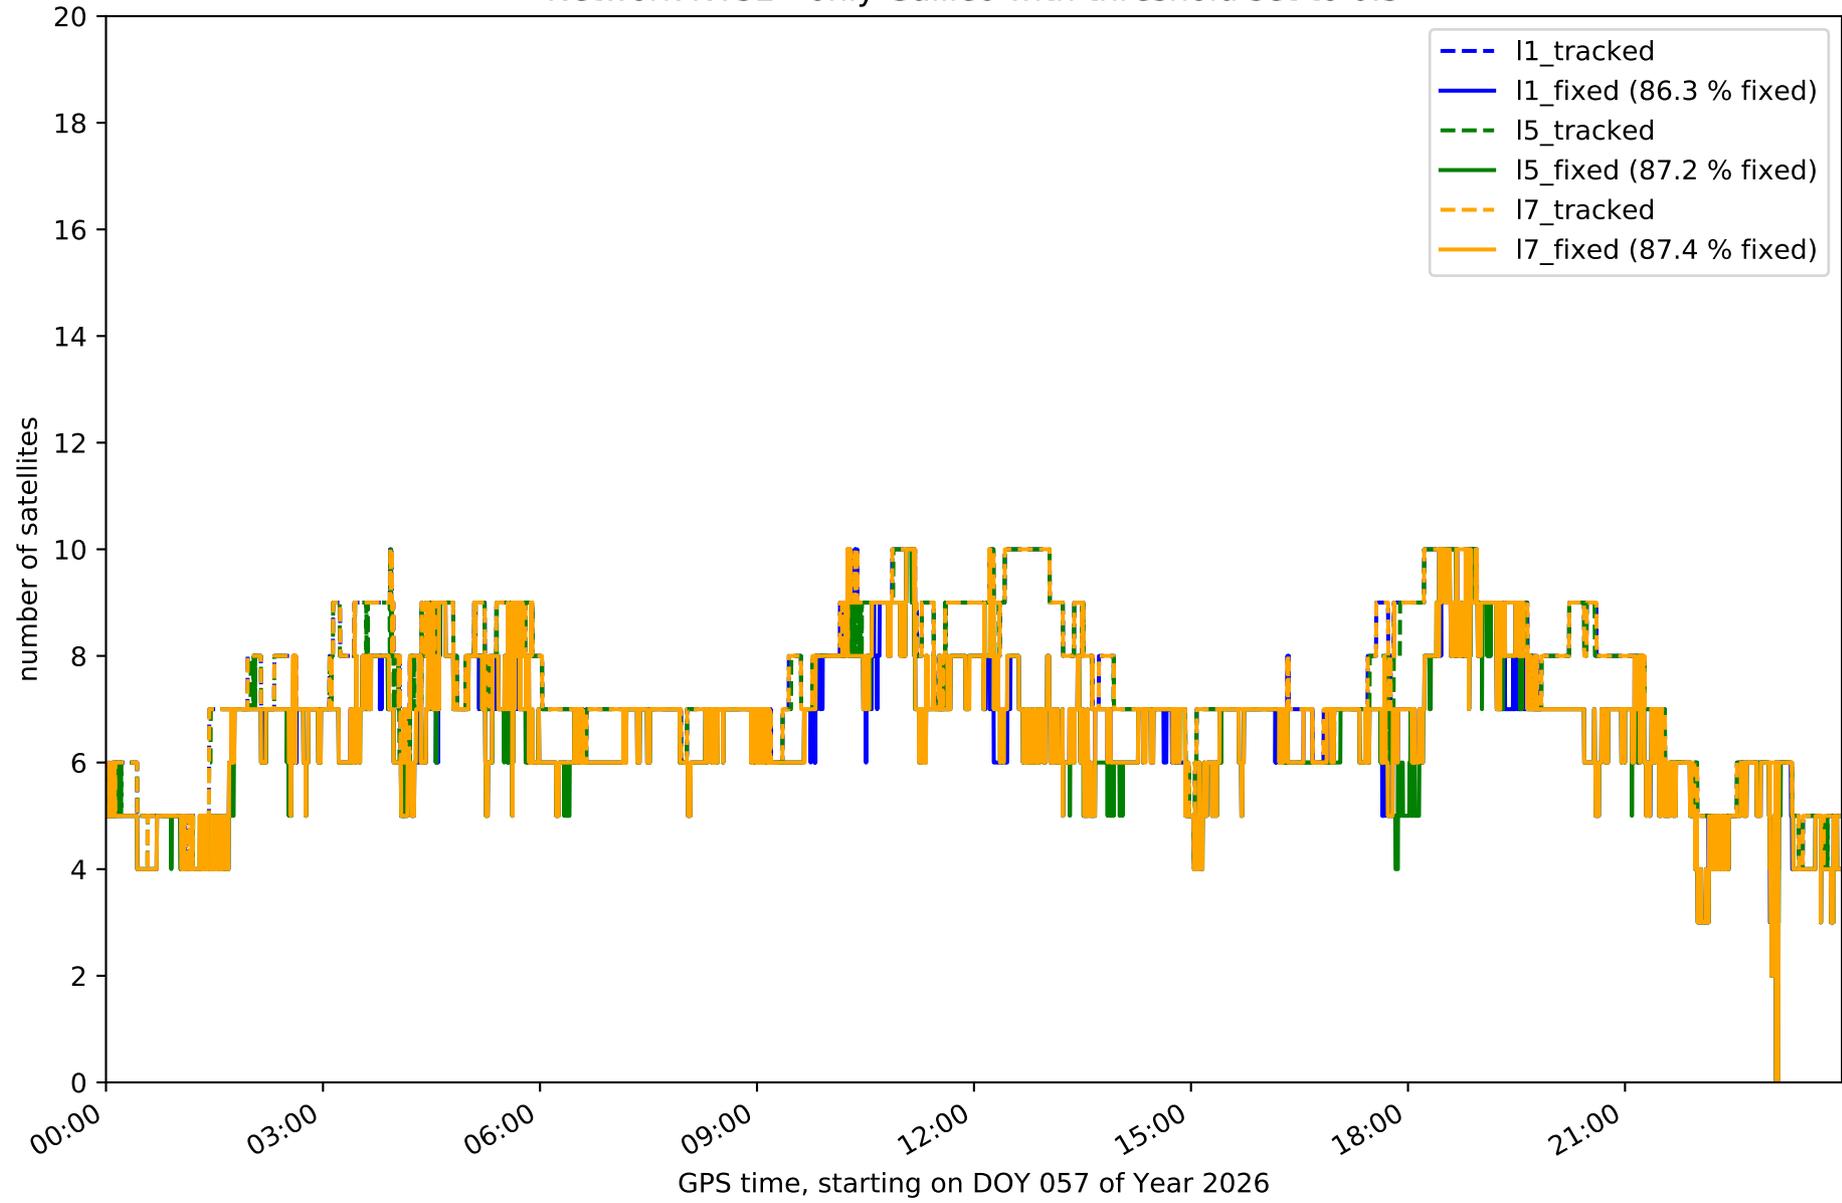


Station EH01 in network NT32

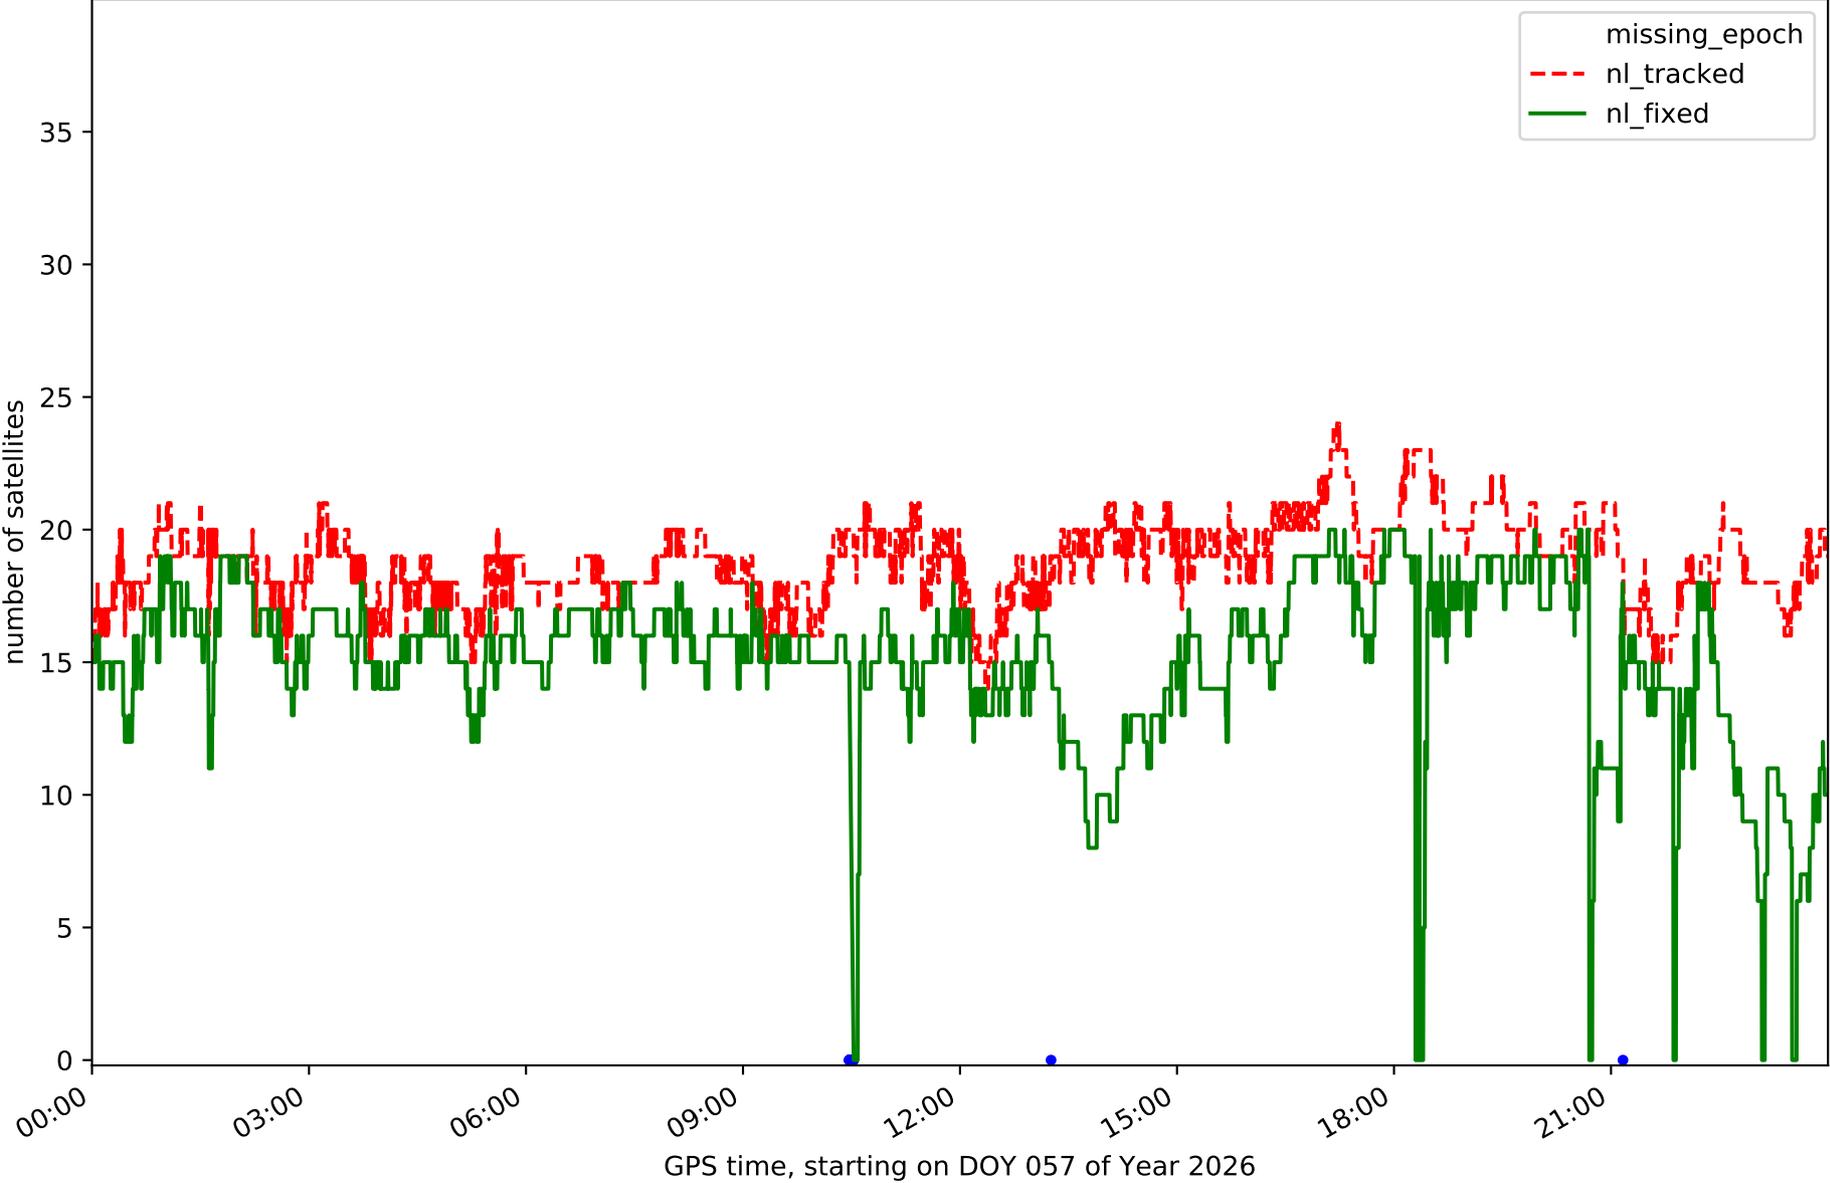


Station EH02 in network NT32

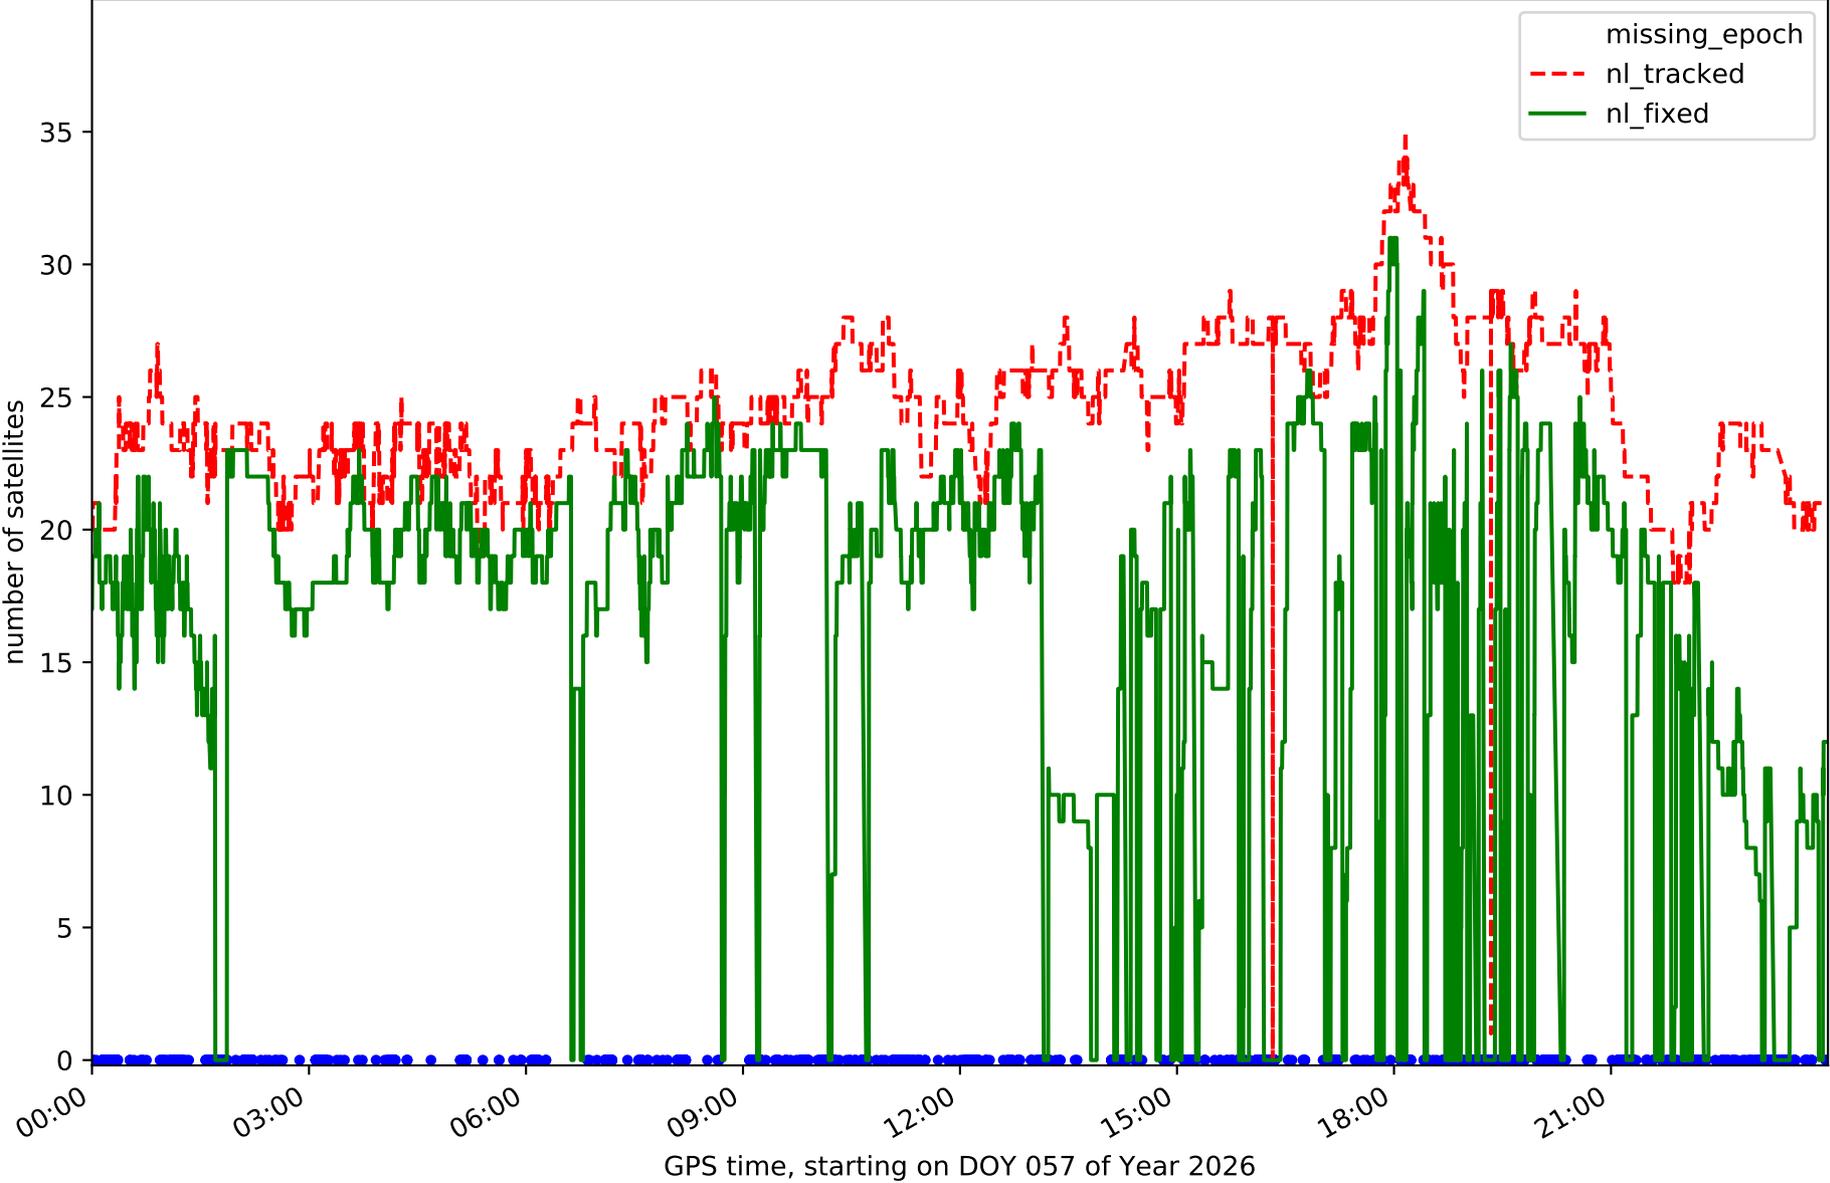


Station GOM1 in network NT32

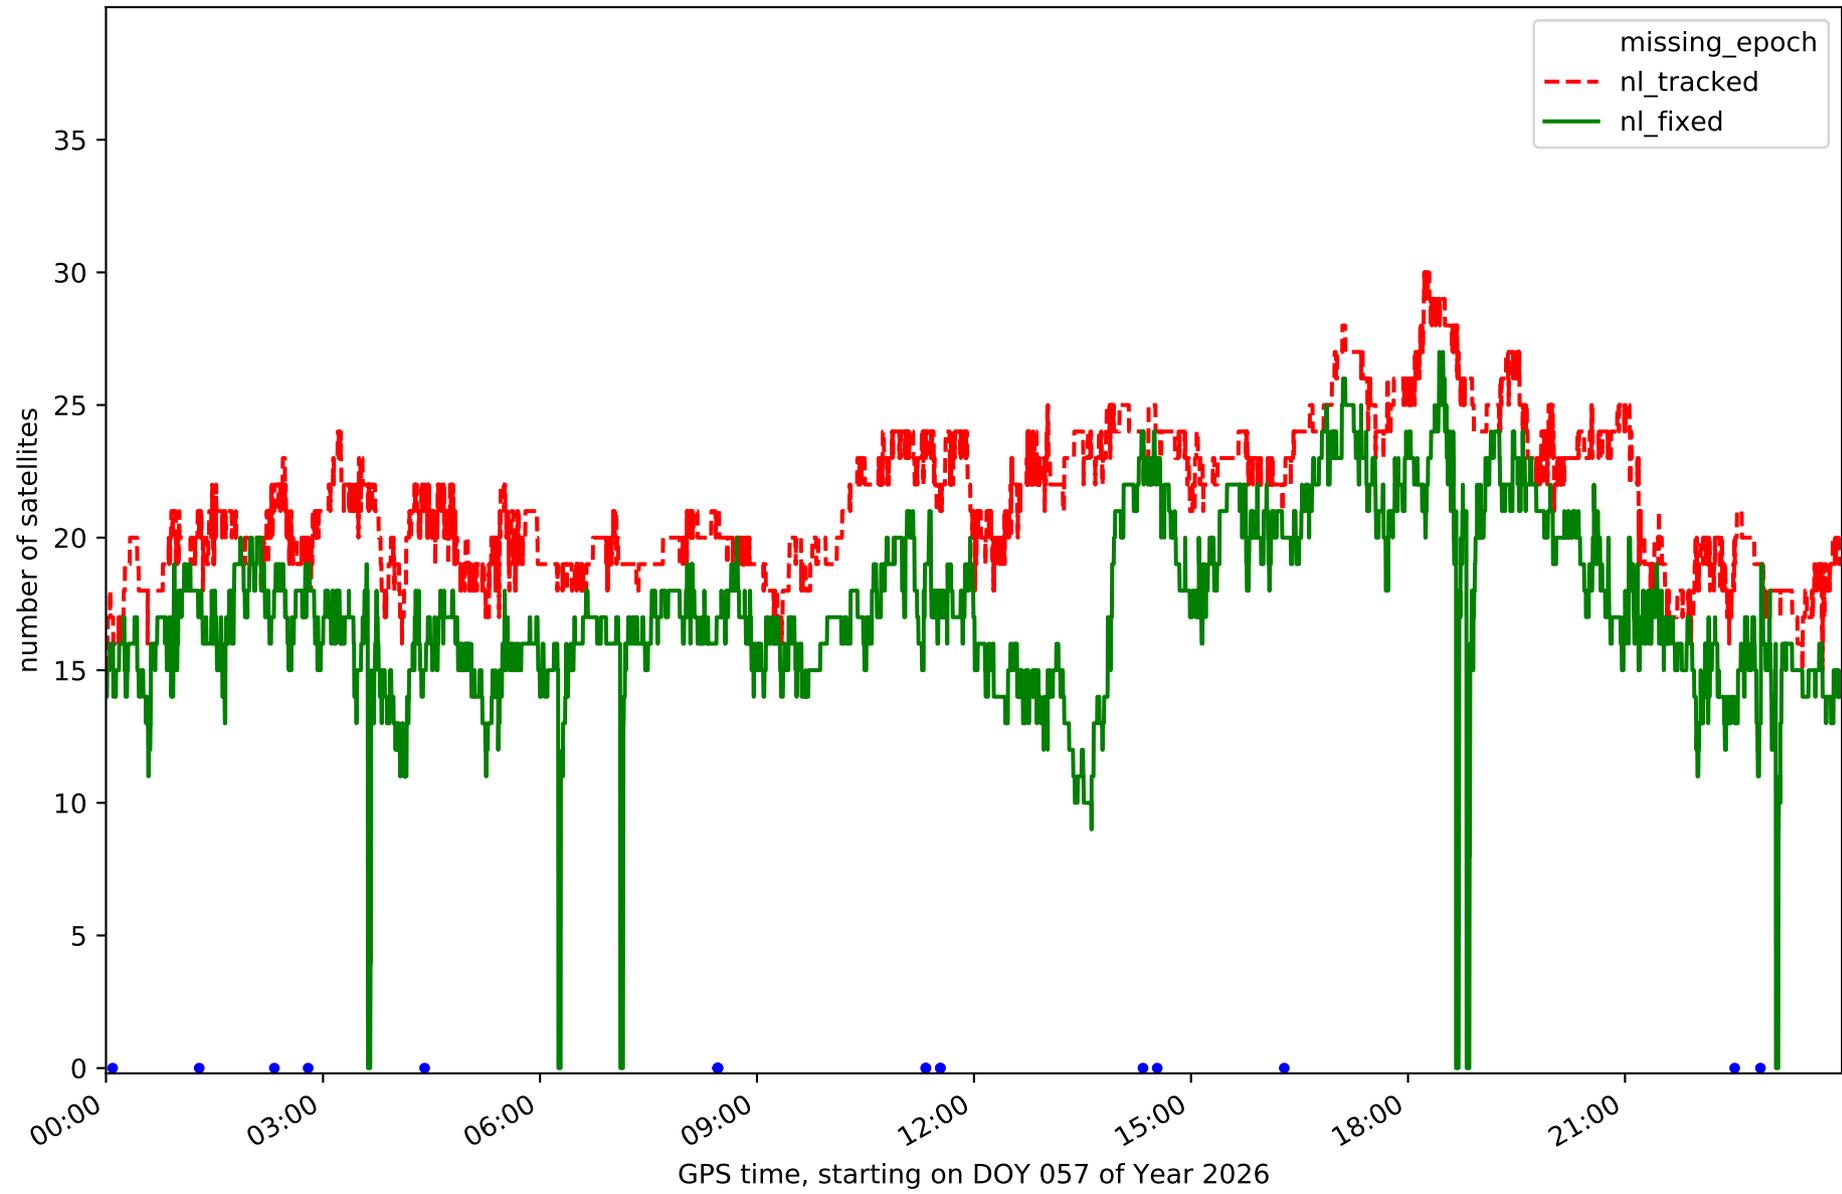


Station GOME in network NT32

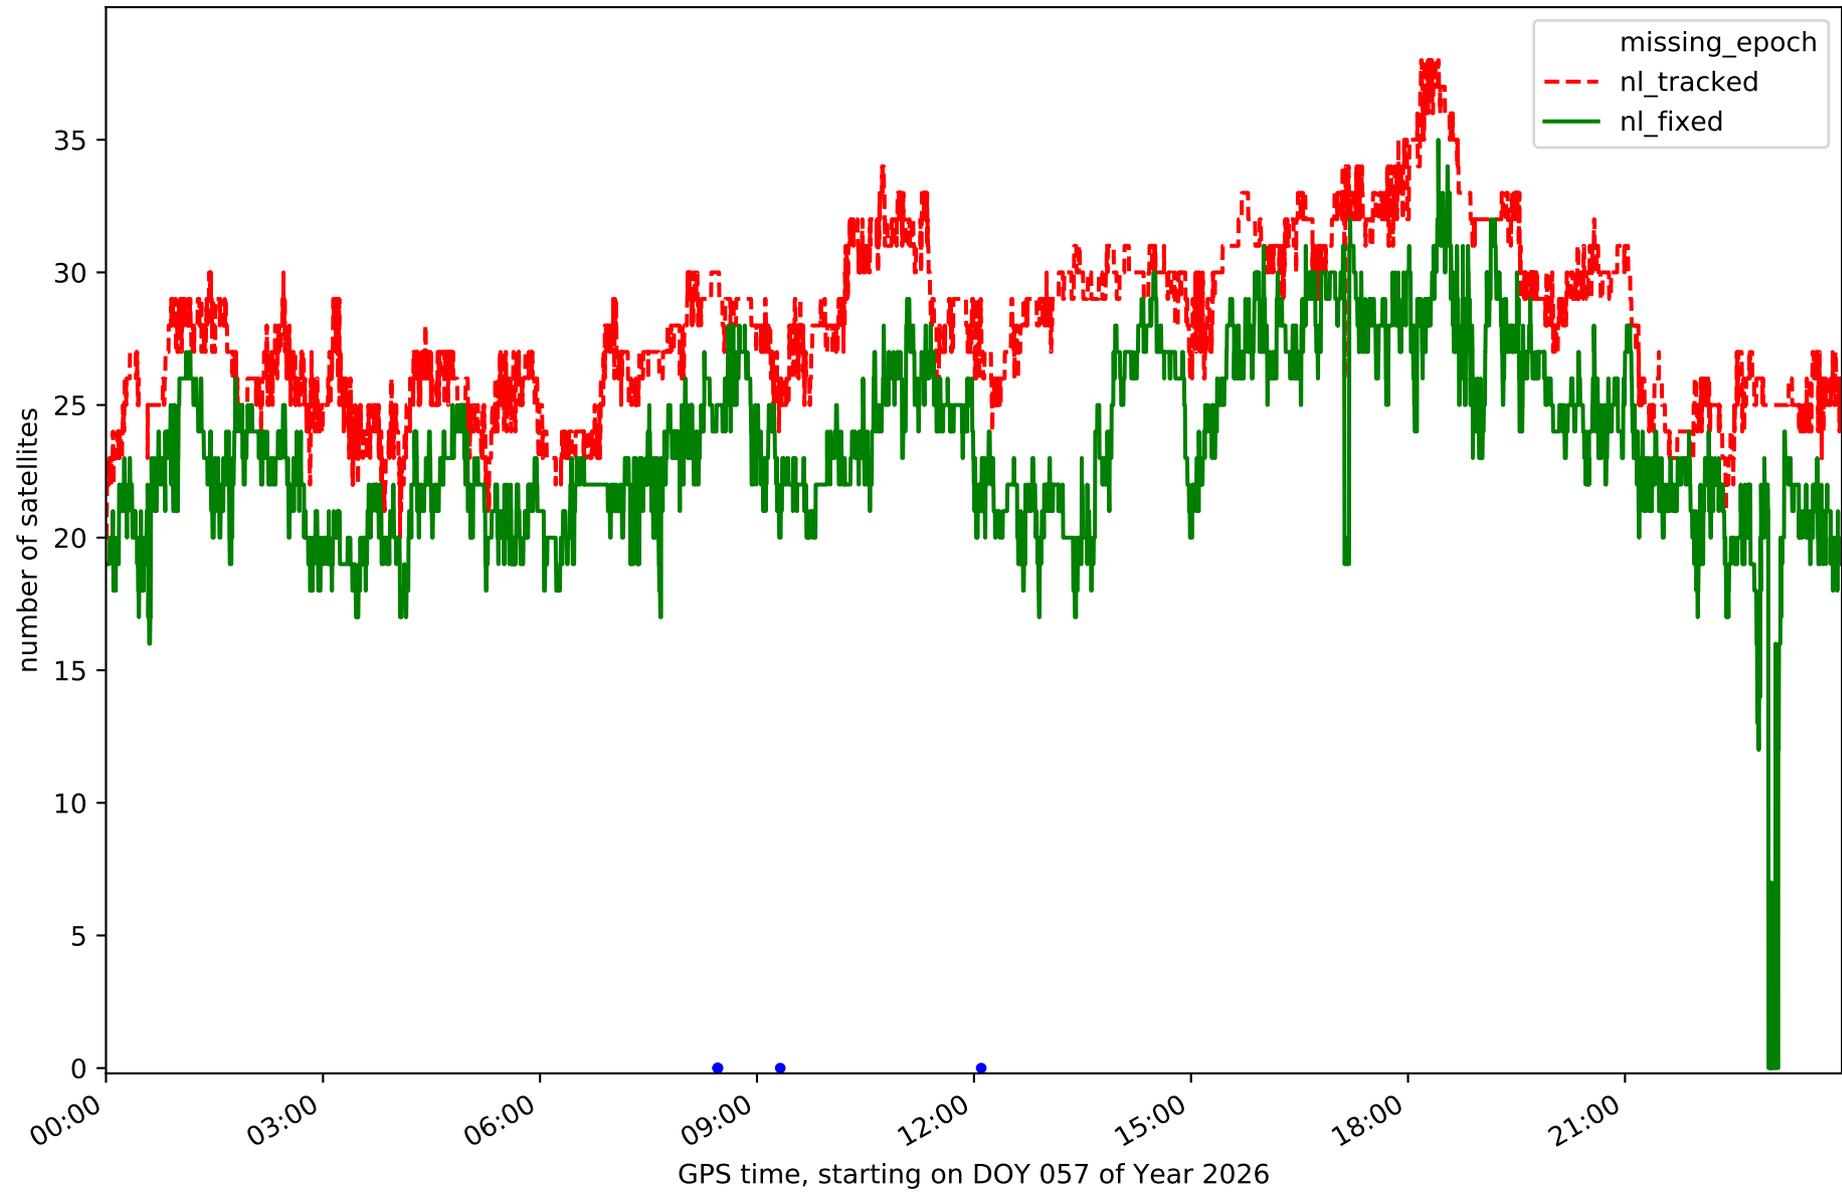


Station IZAN in network NT32

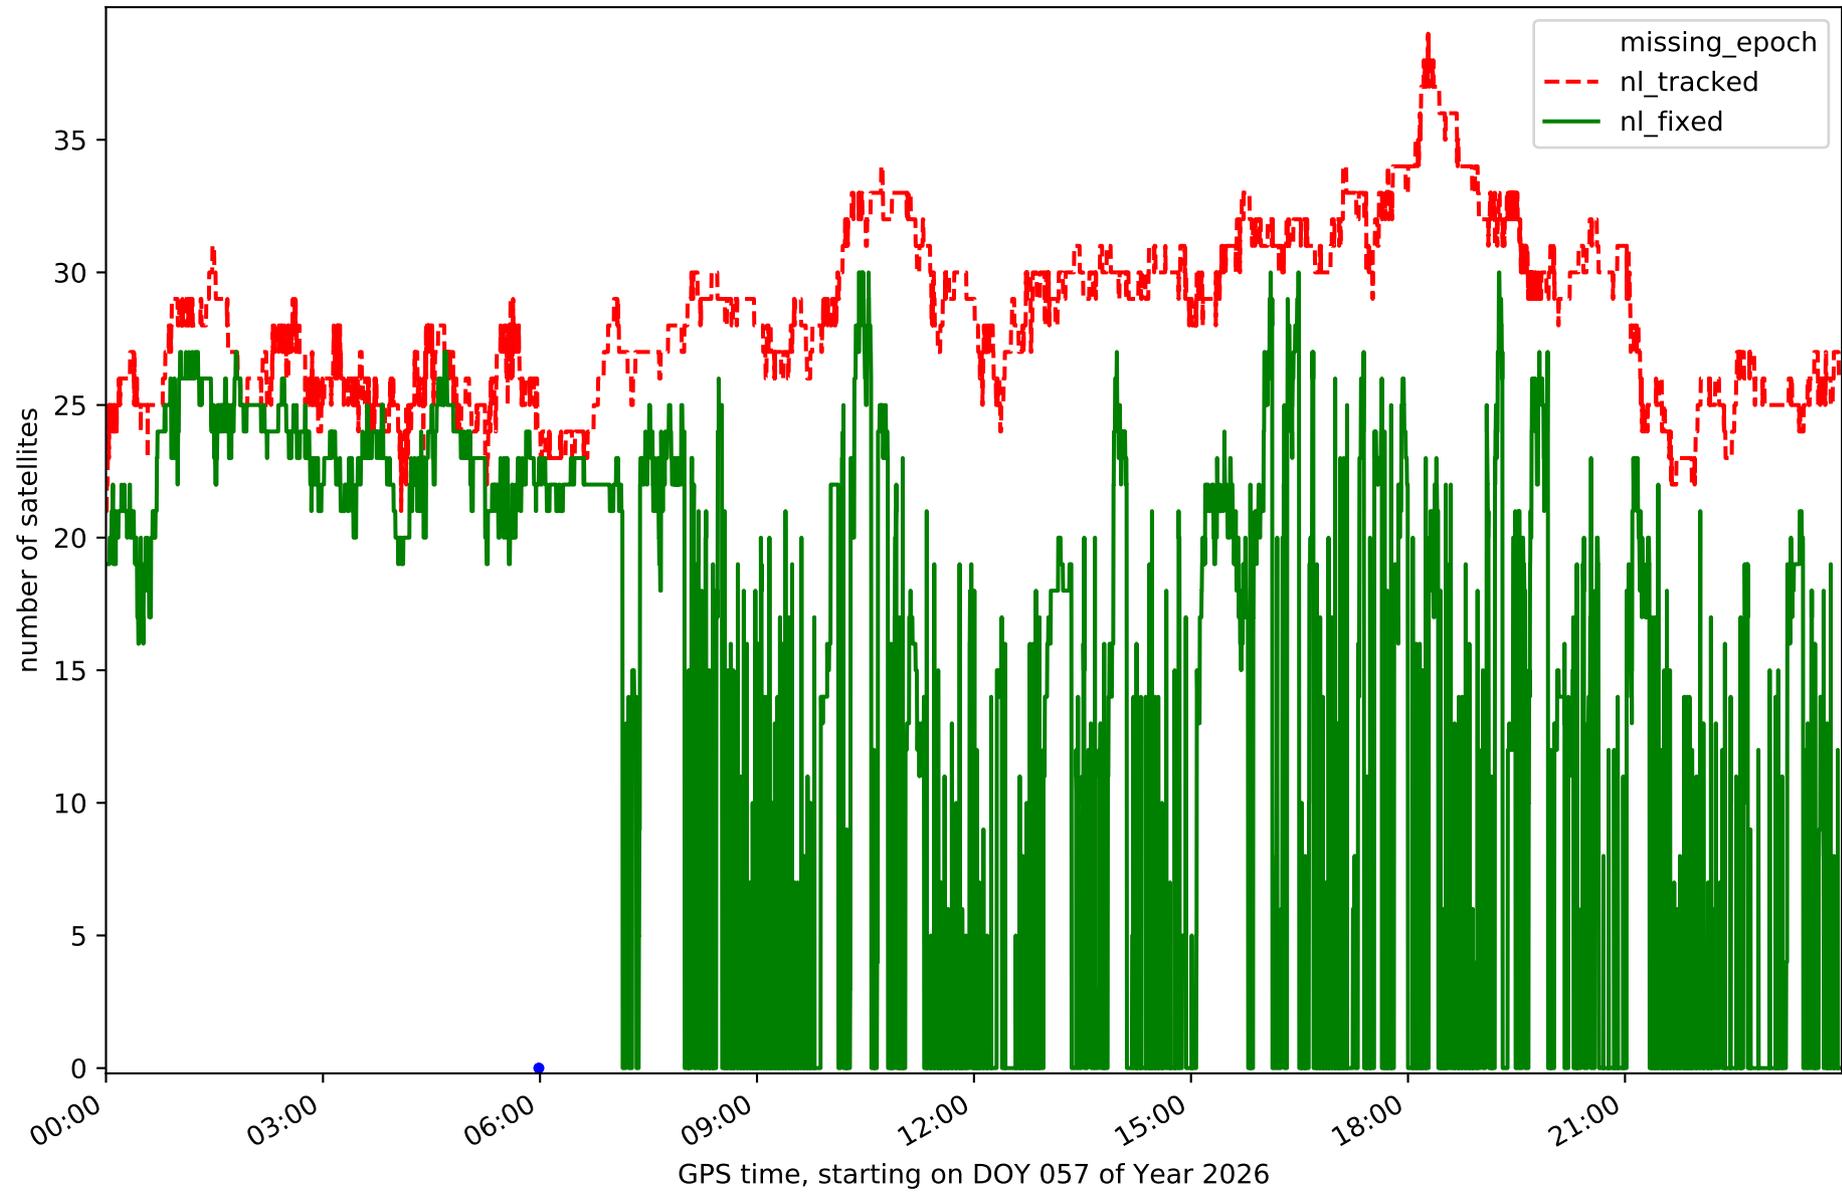


Station LP01 in network NT32

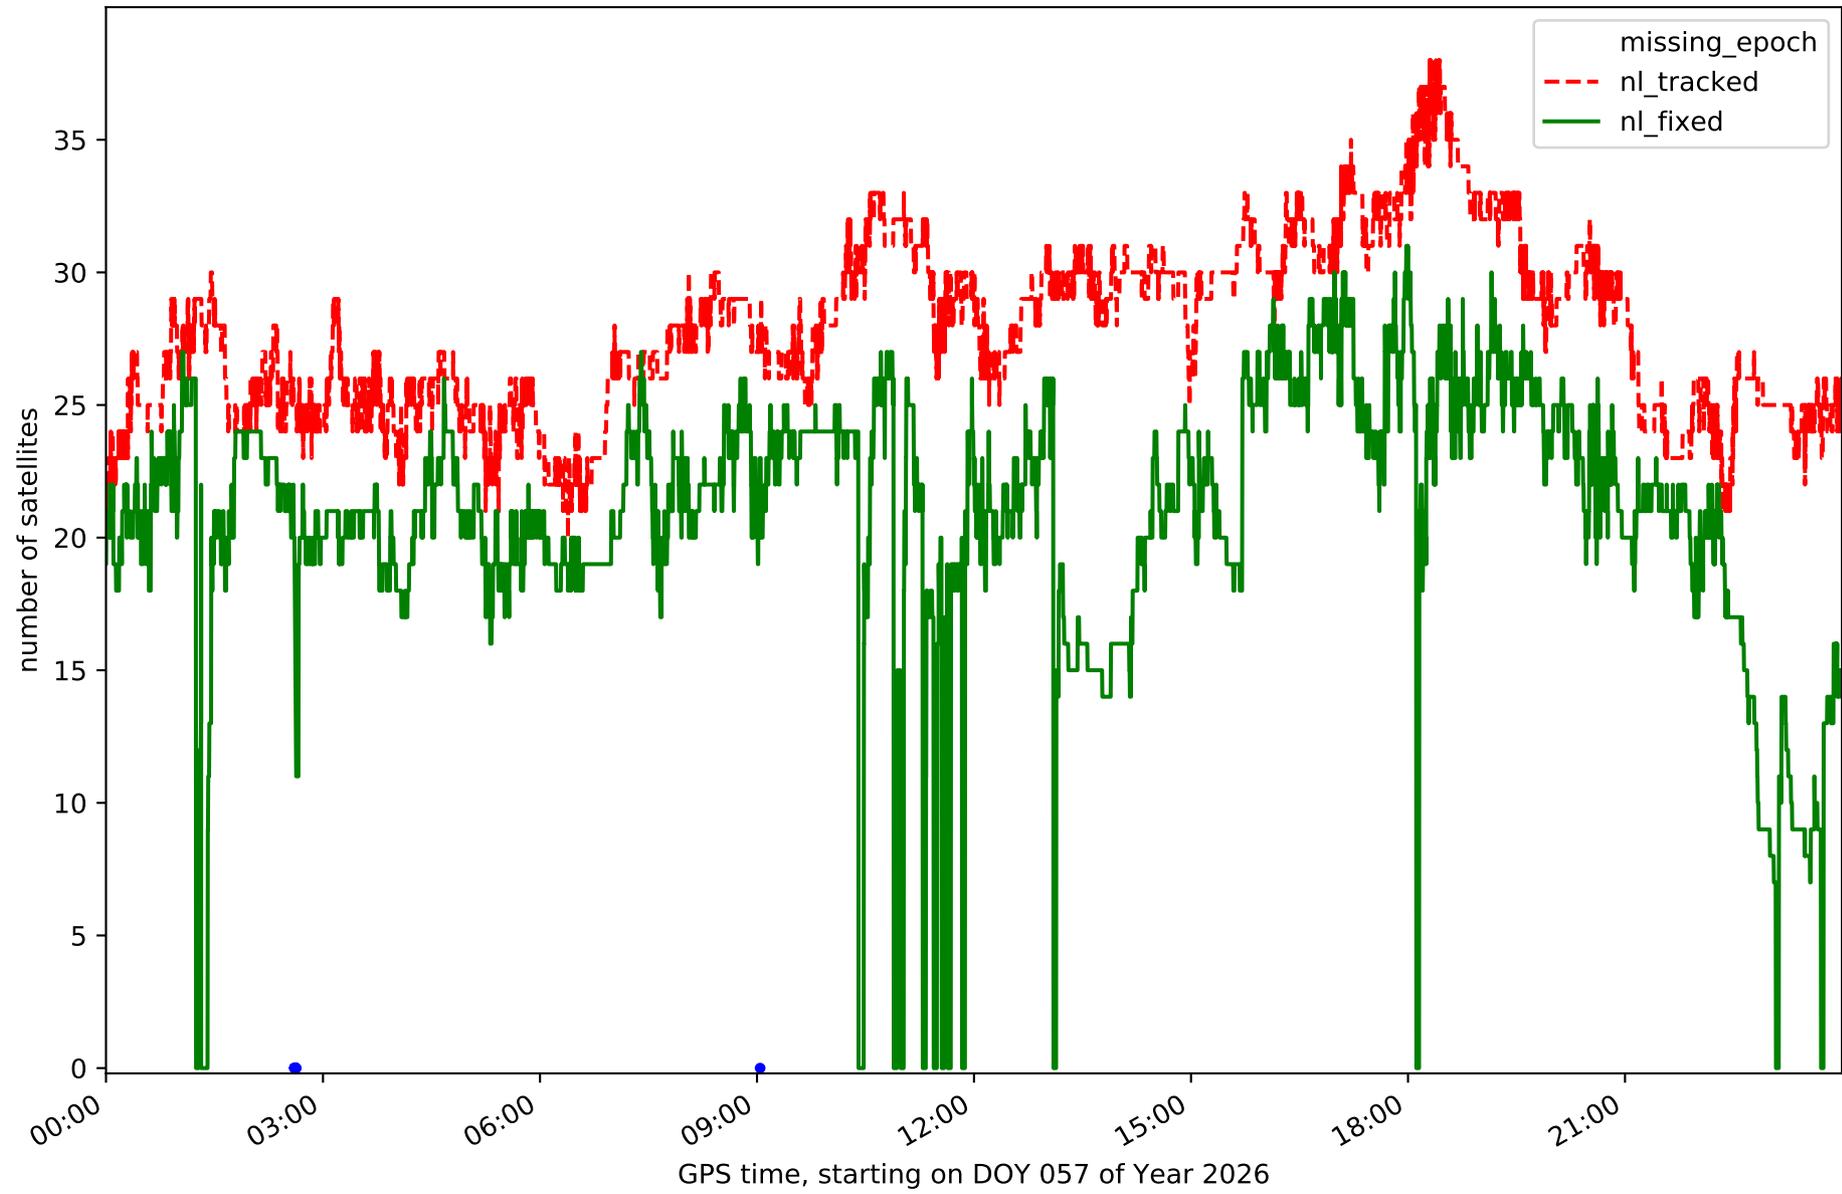


Station LP03 in network NT32

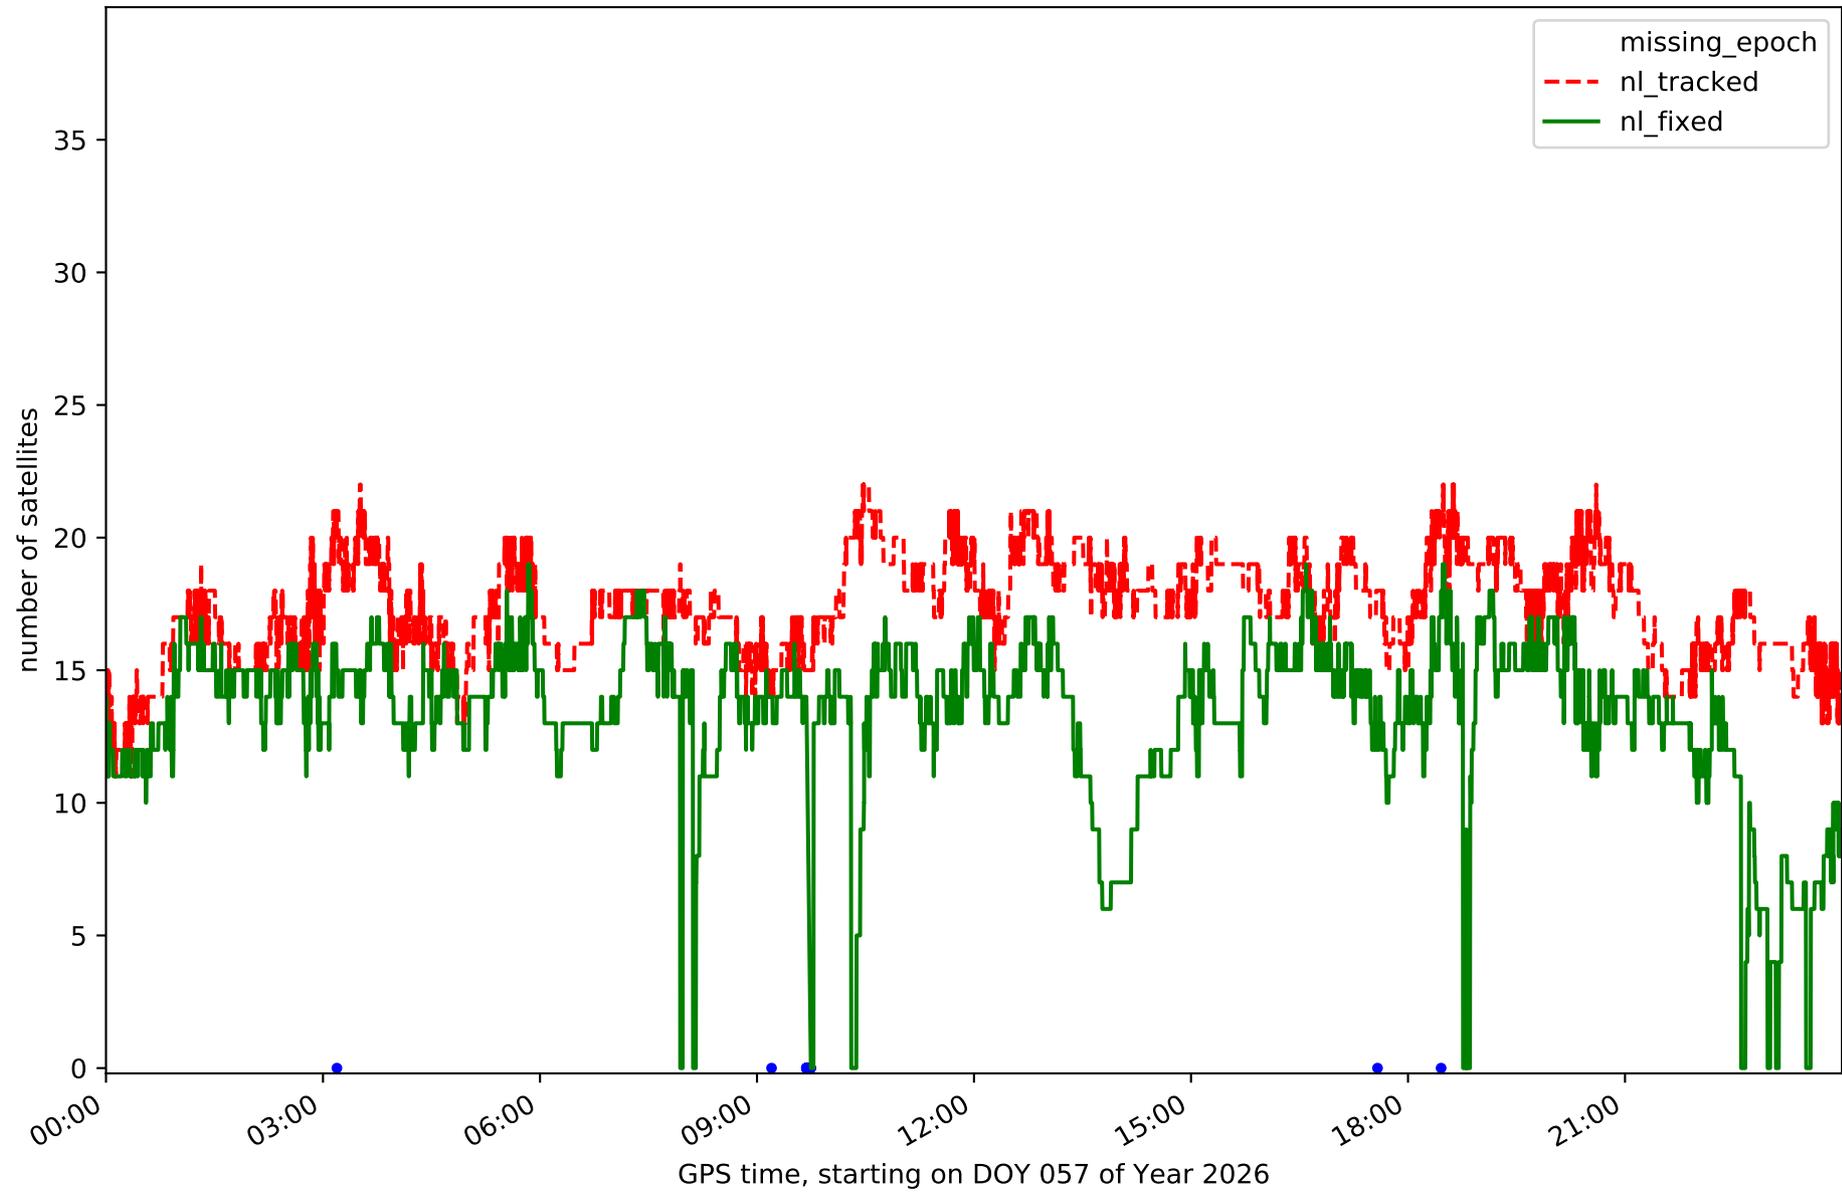


Station LPAL in network NT32

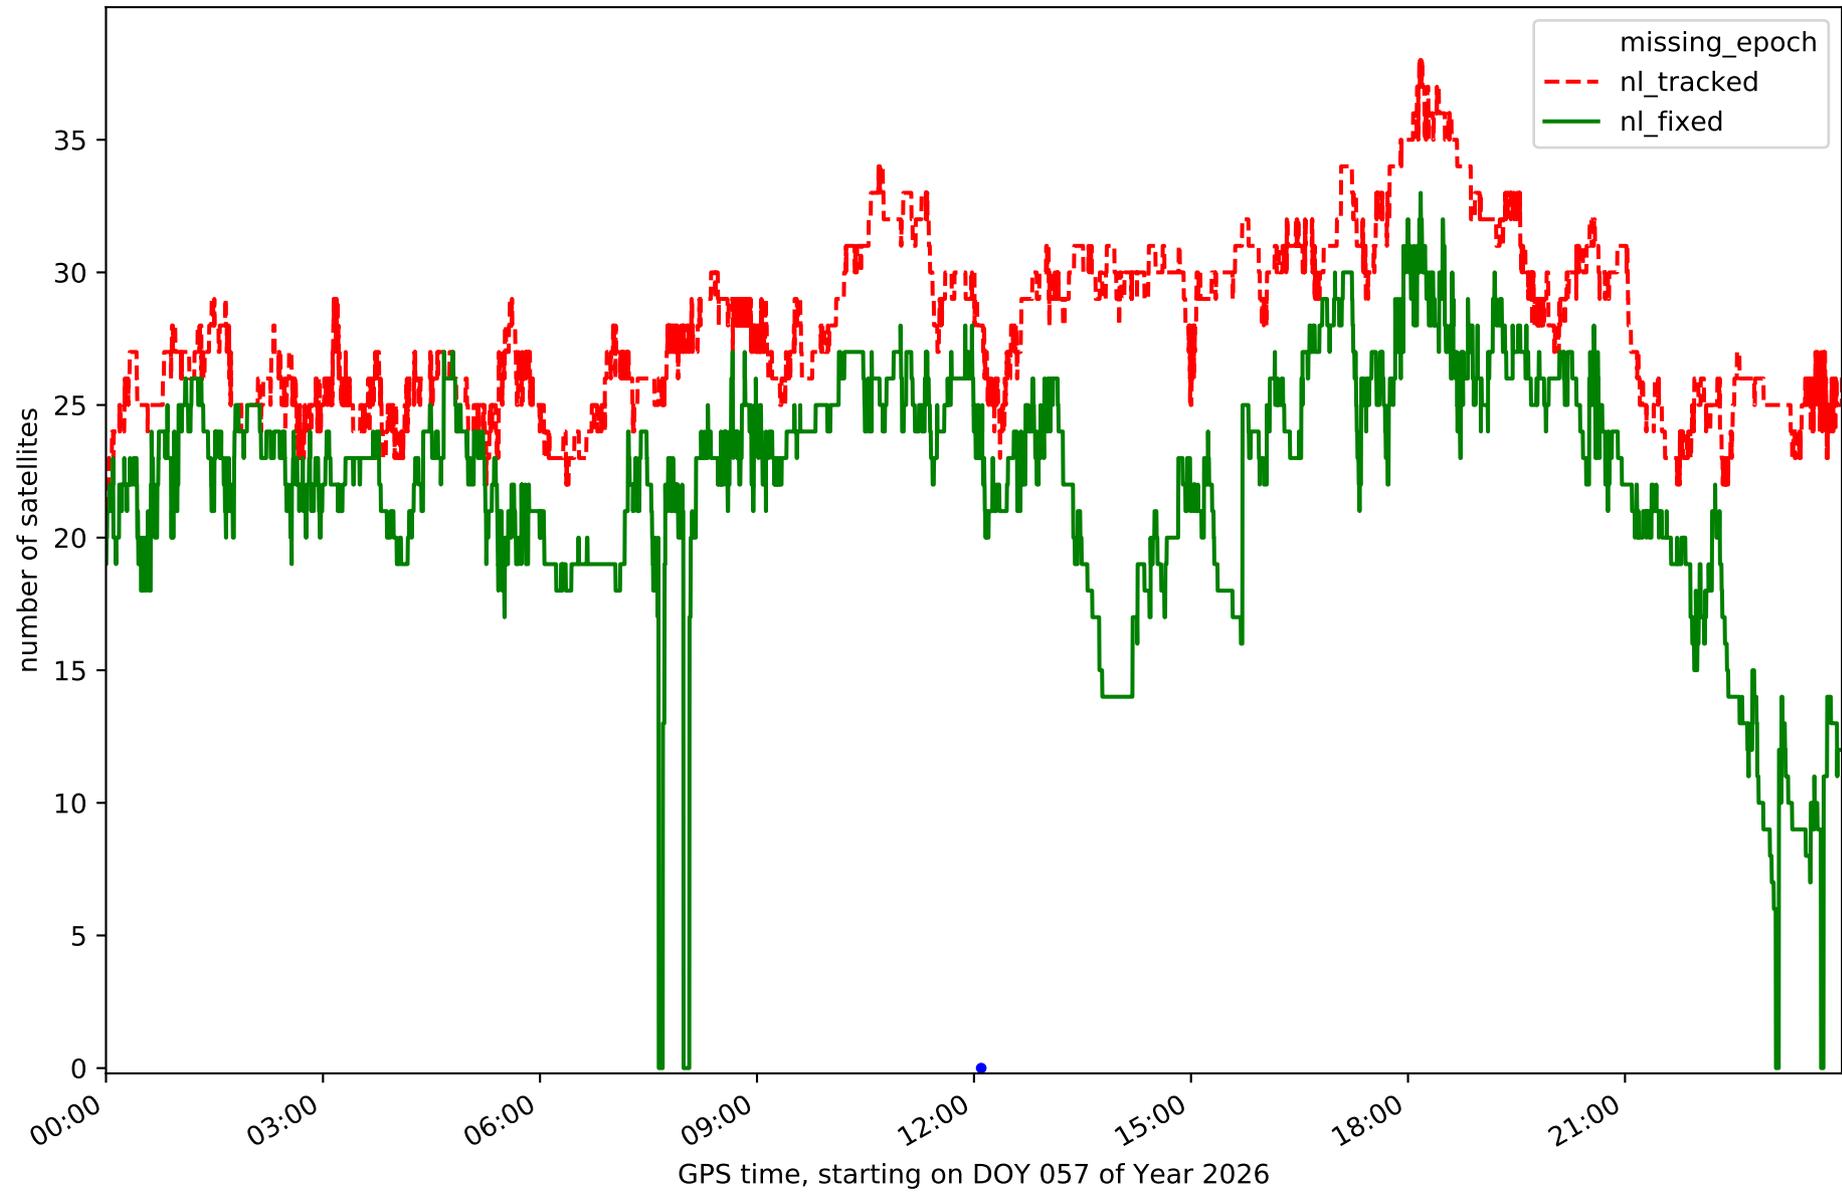


Station LRES in network NT32

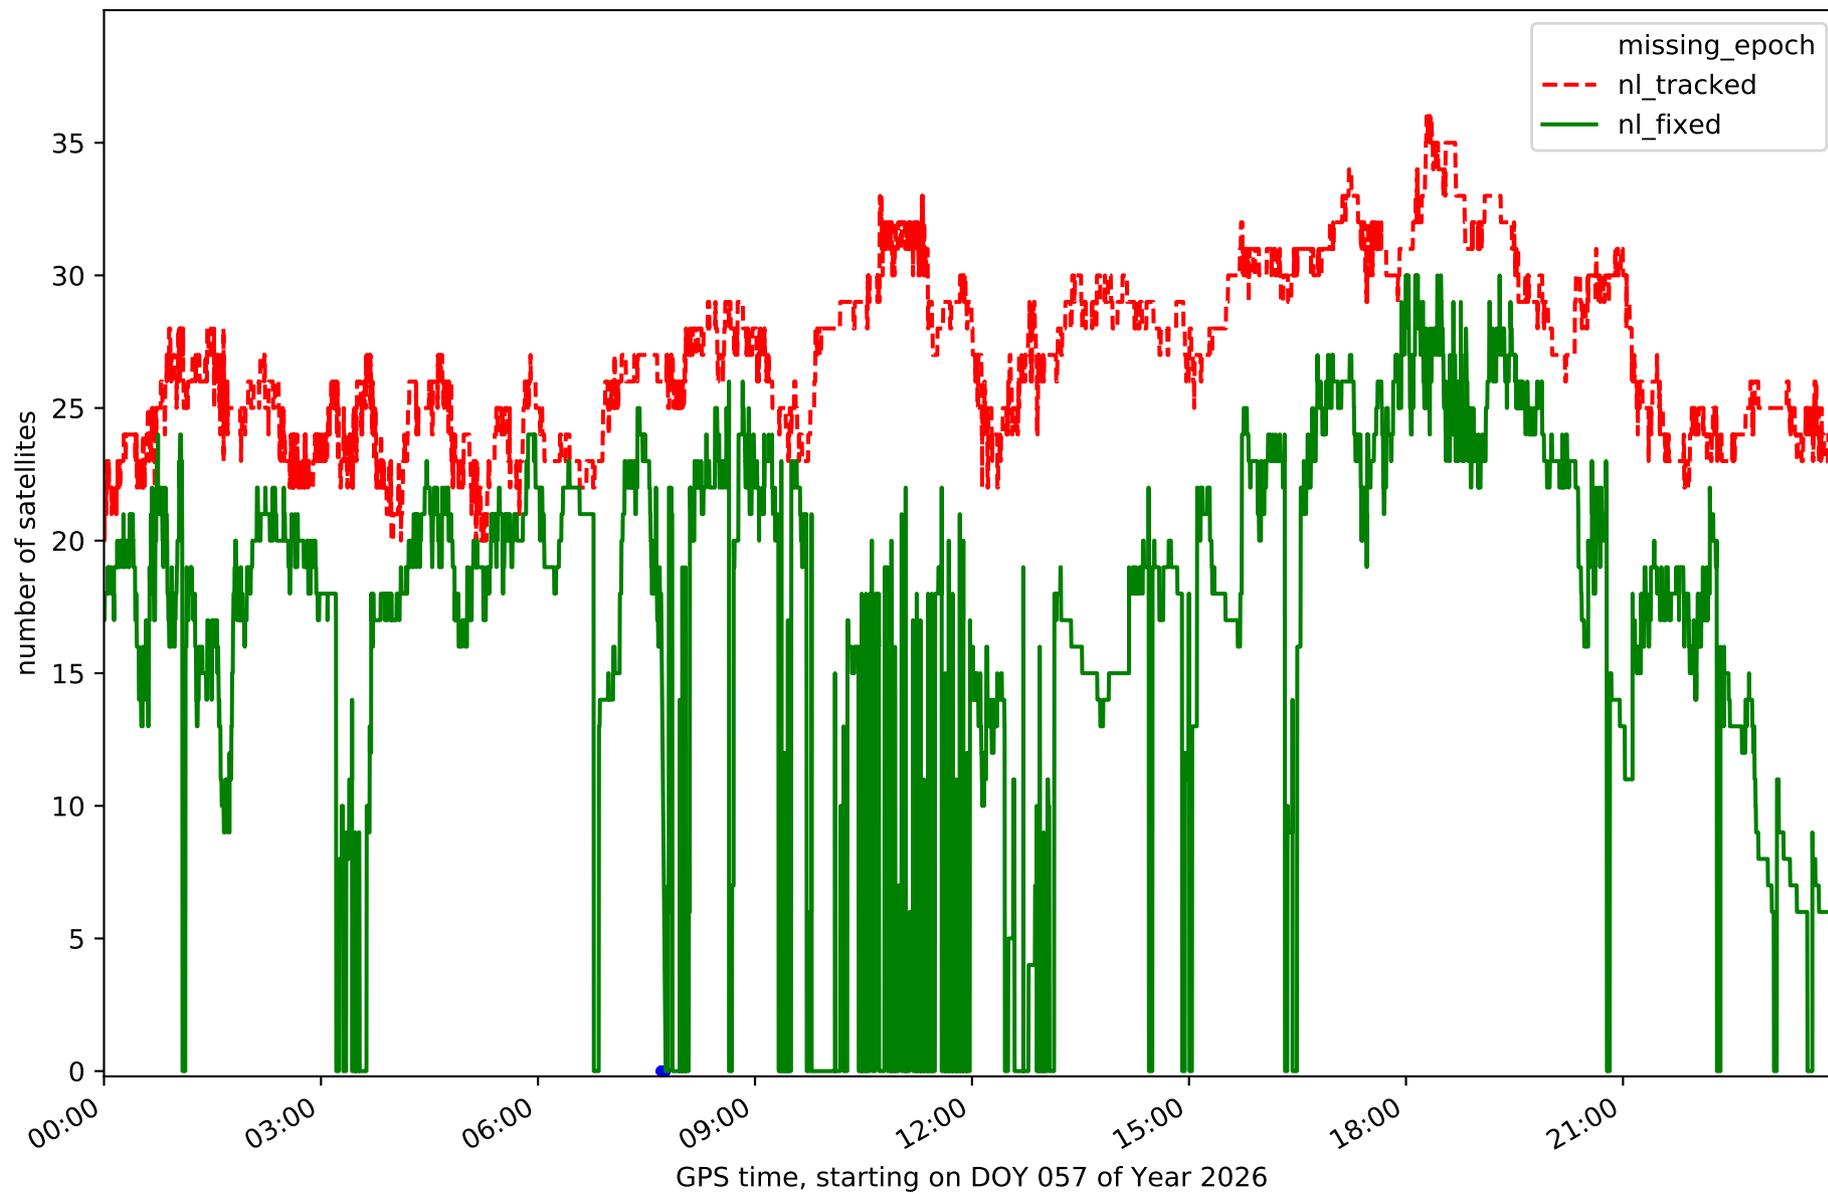


Station TN01 in network NT32

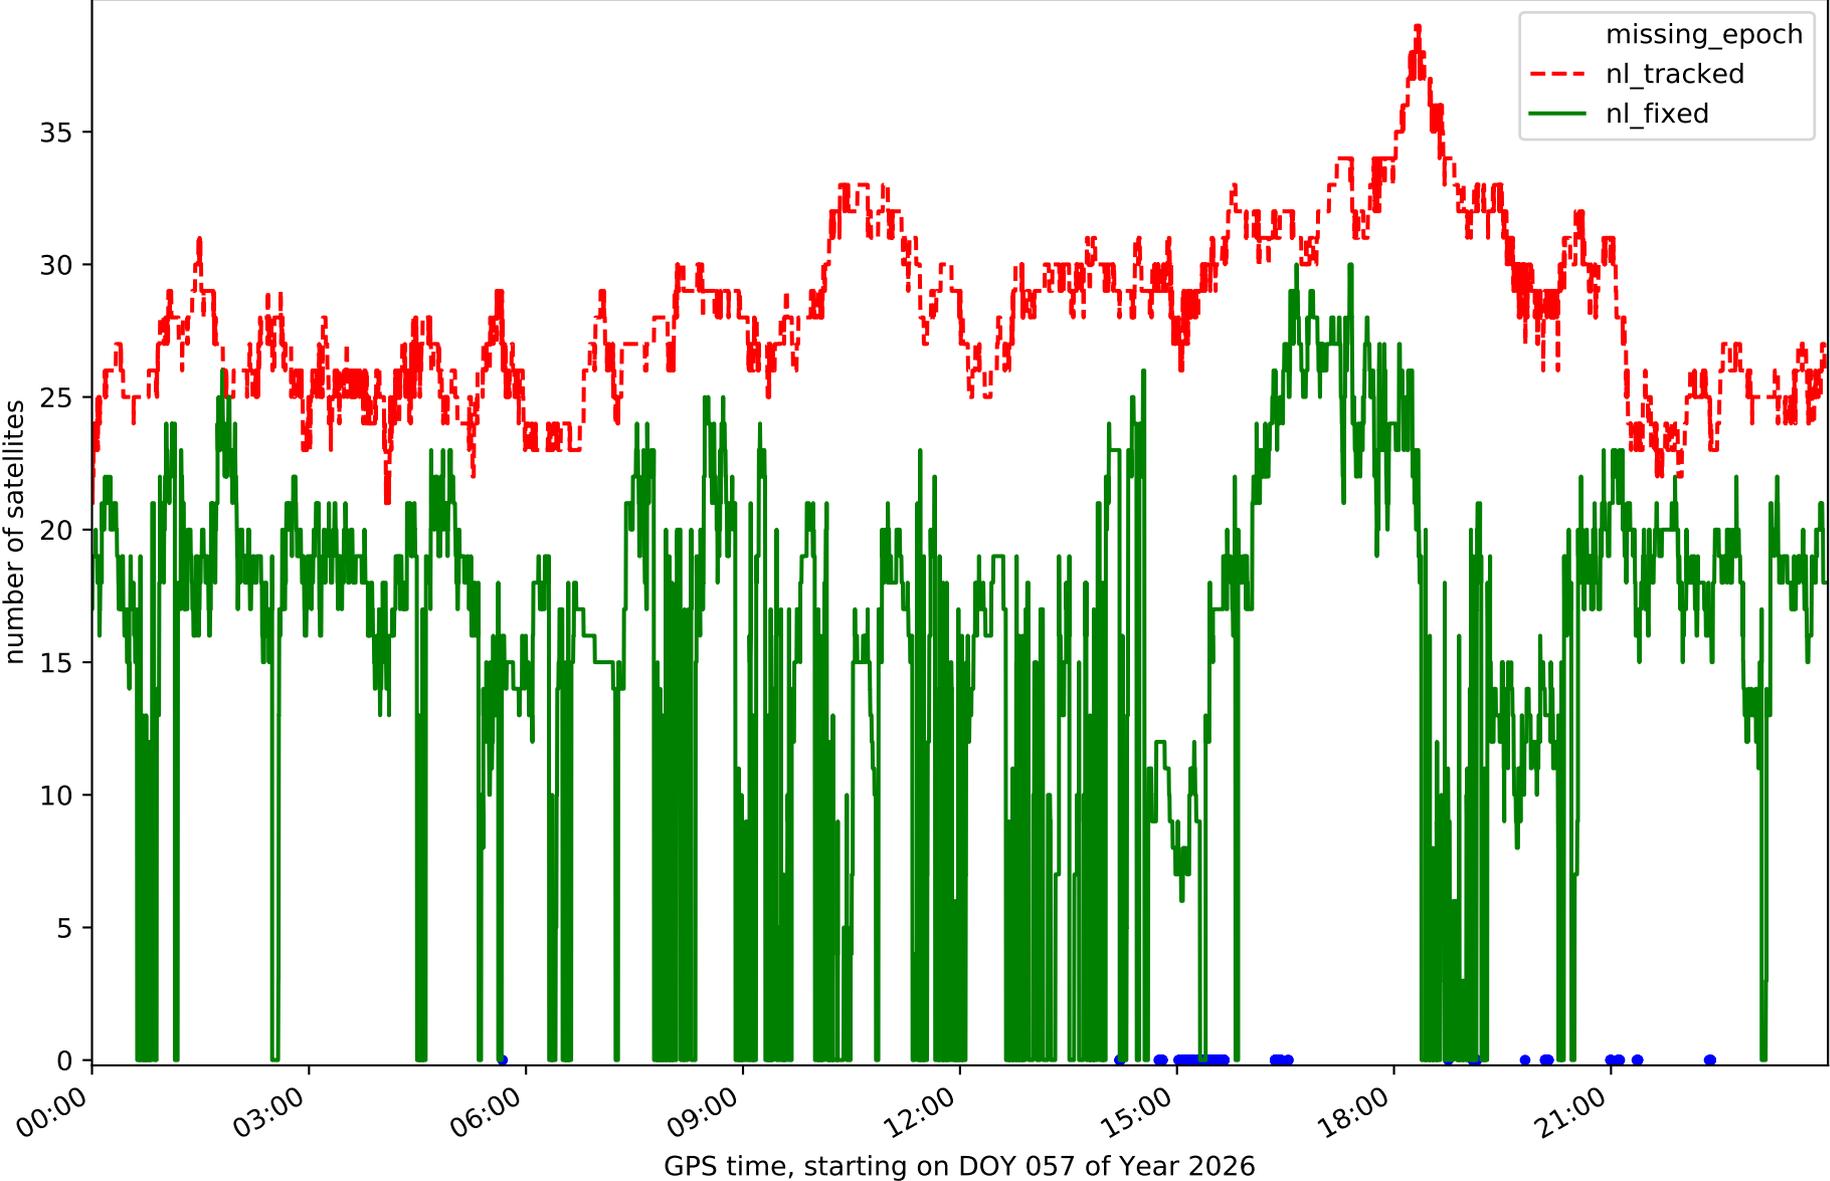


Station TN02 in network NT32

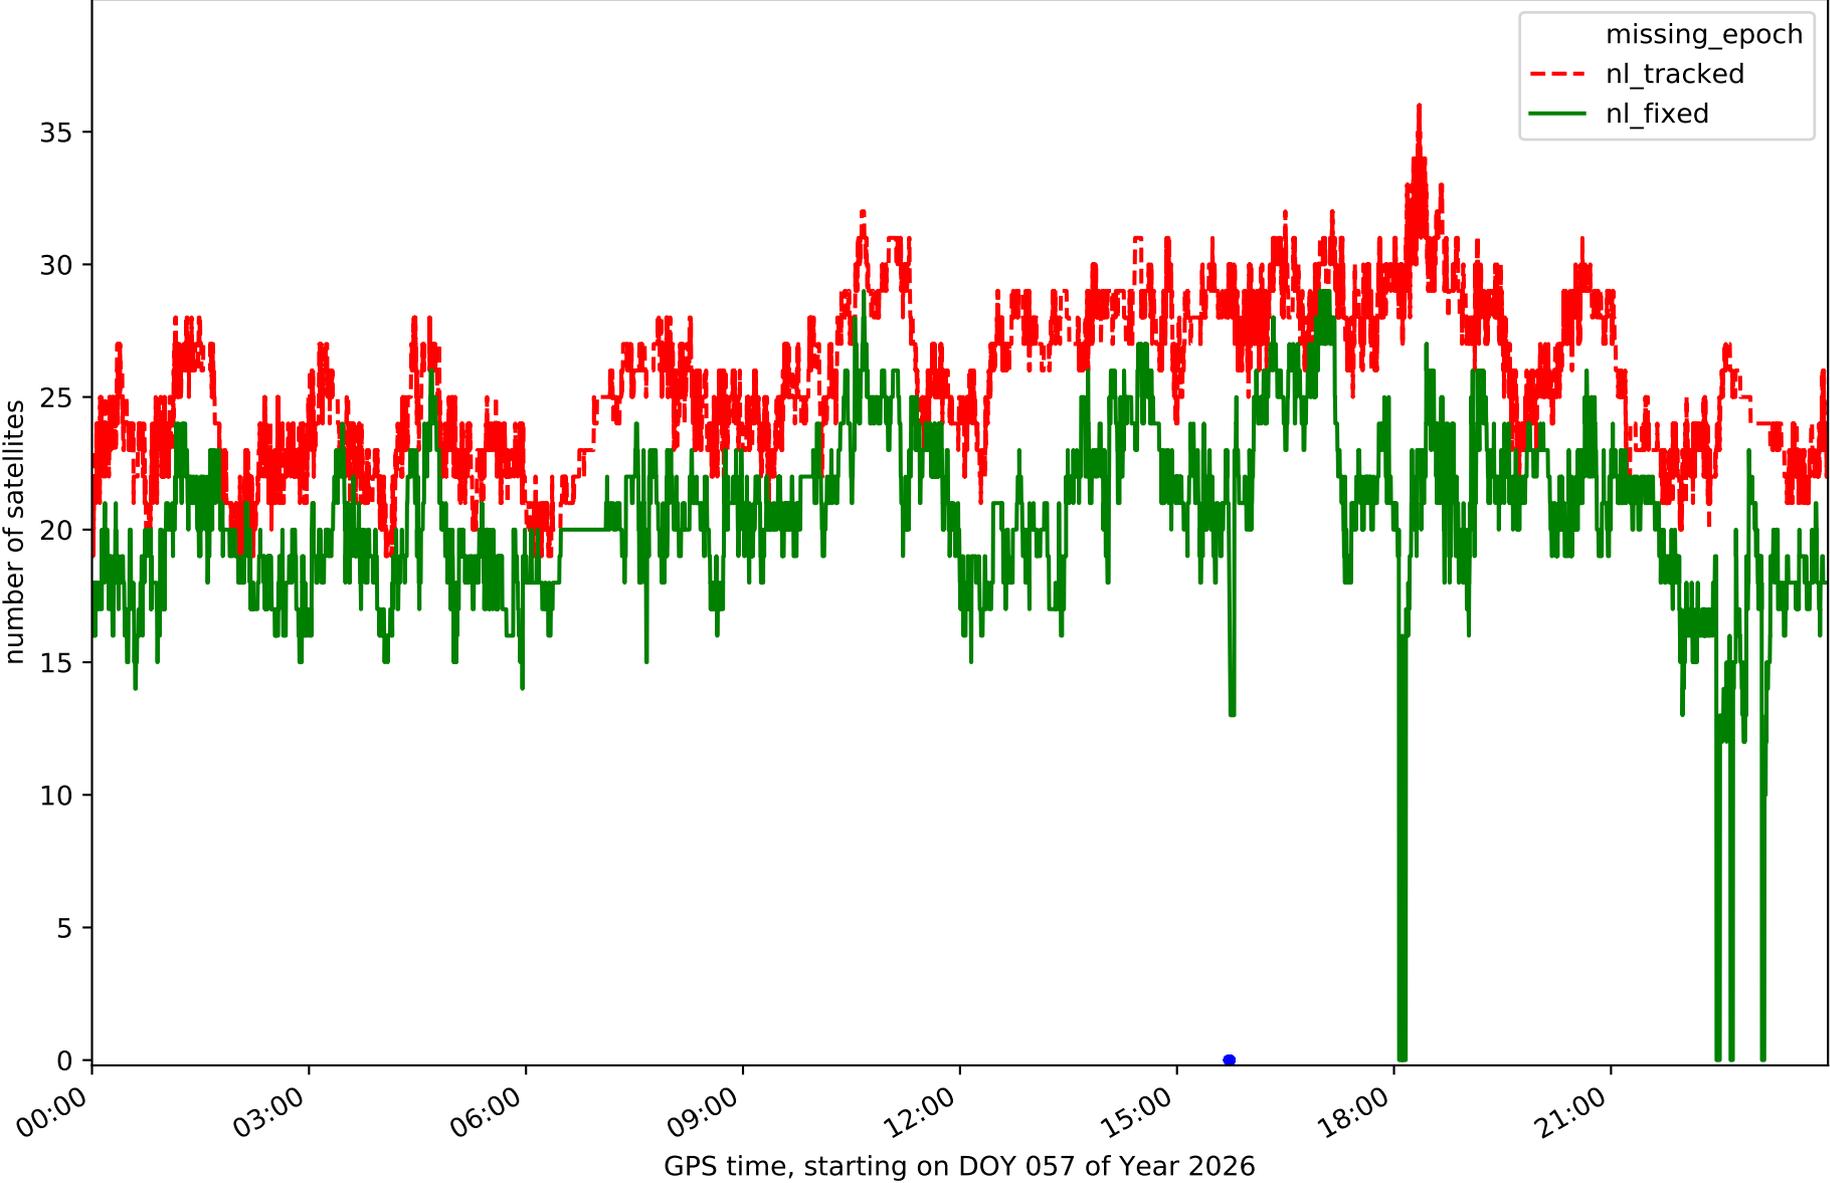


Station TN03 in network NT32

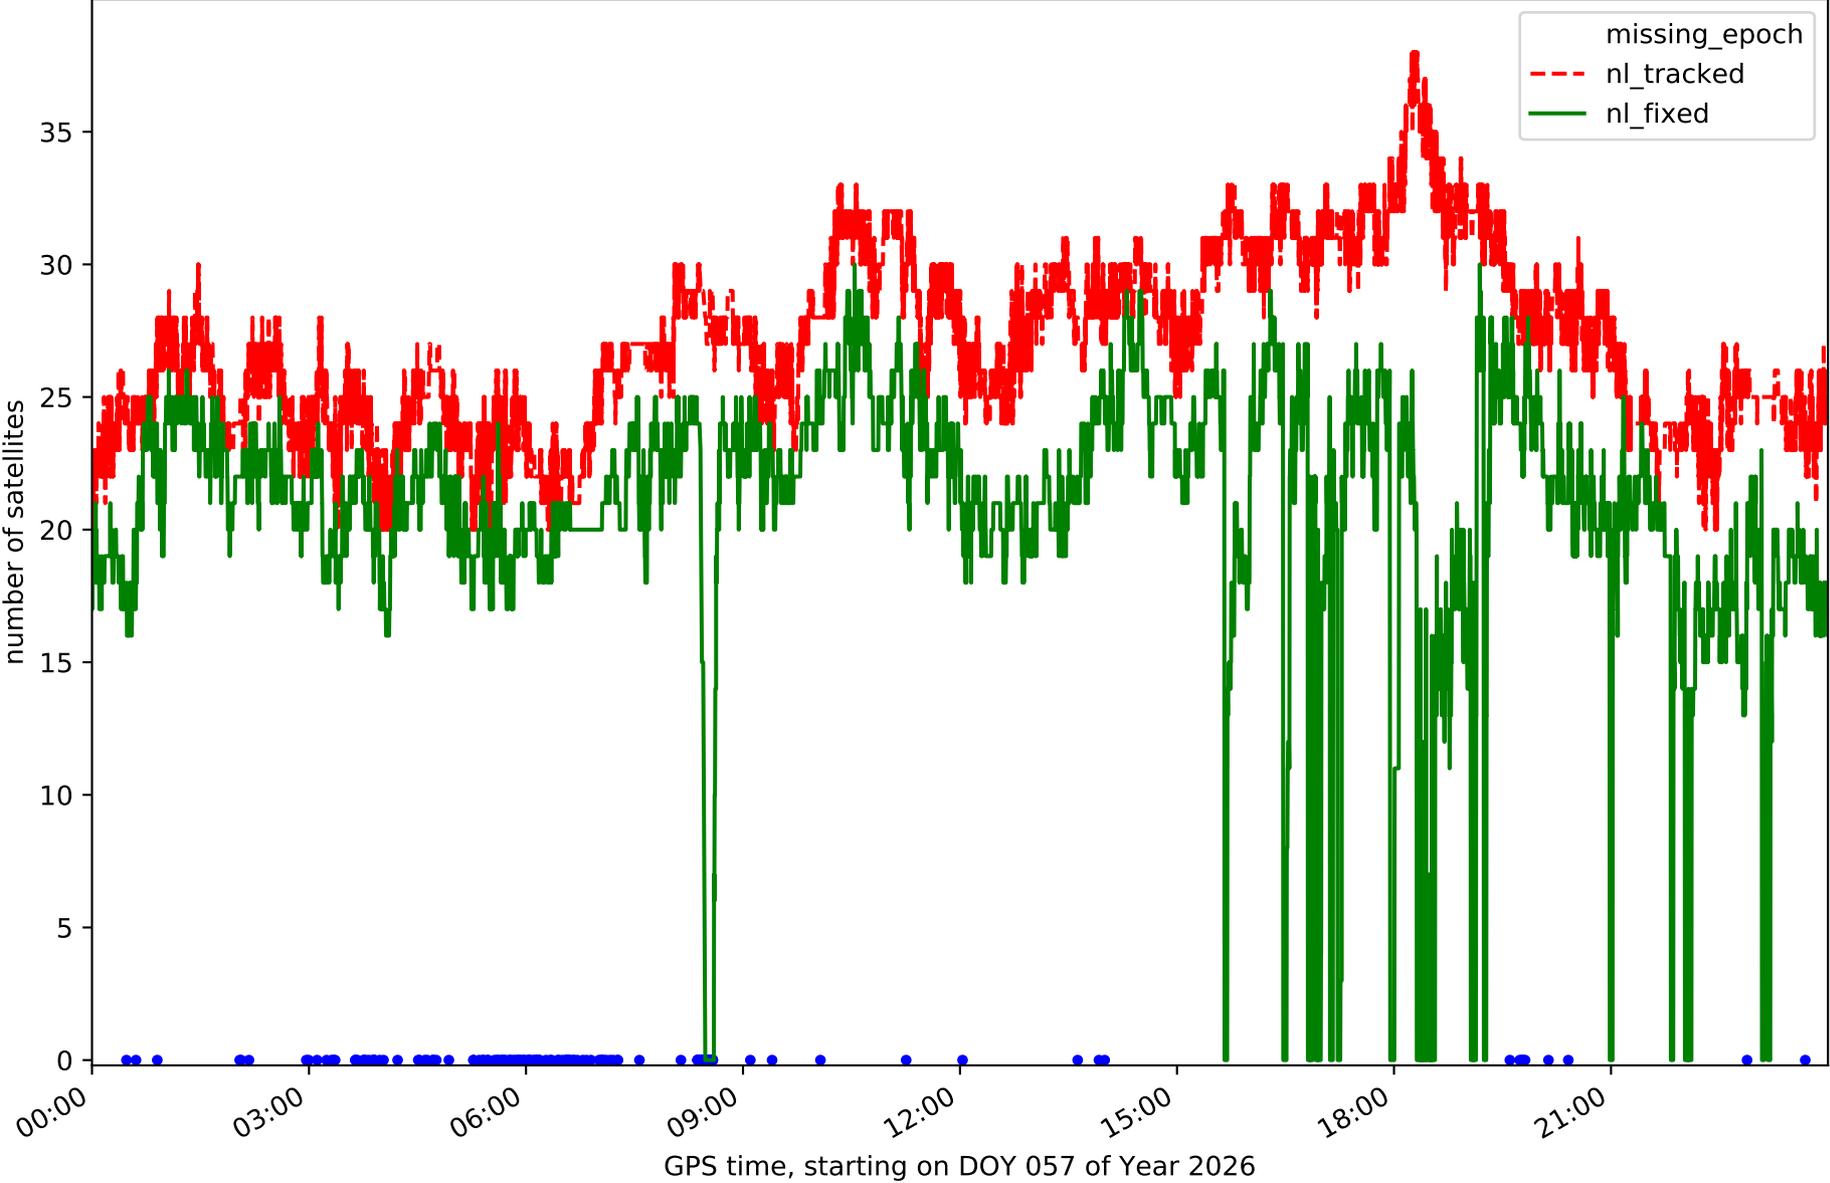


Station TN06 in network NT32

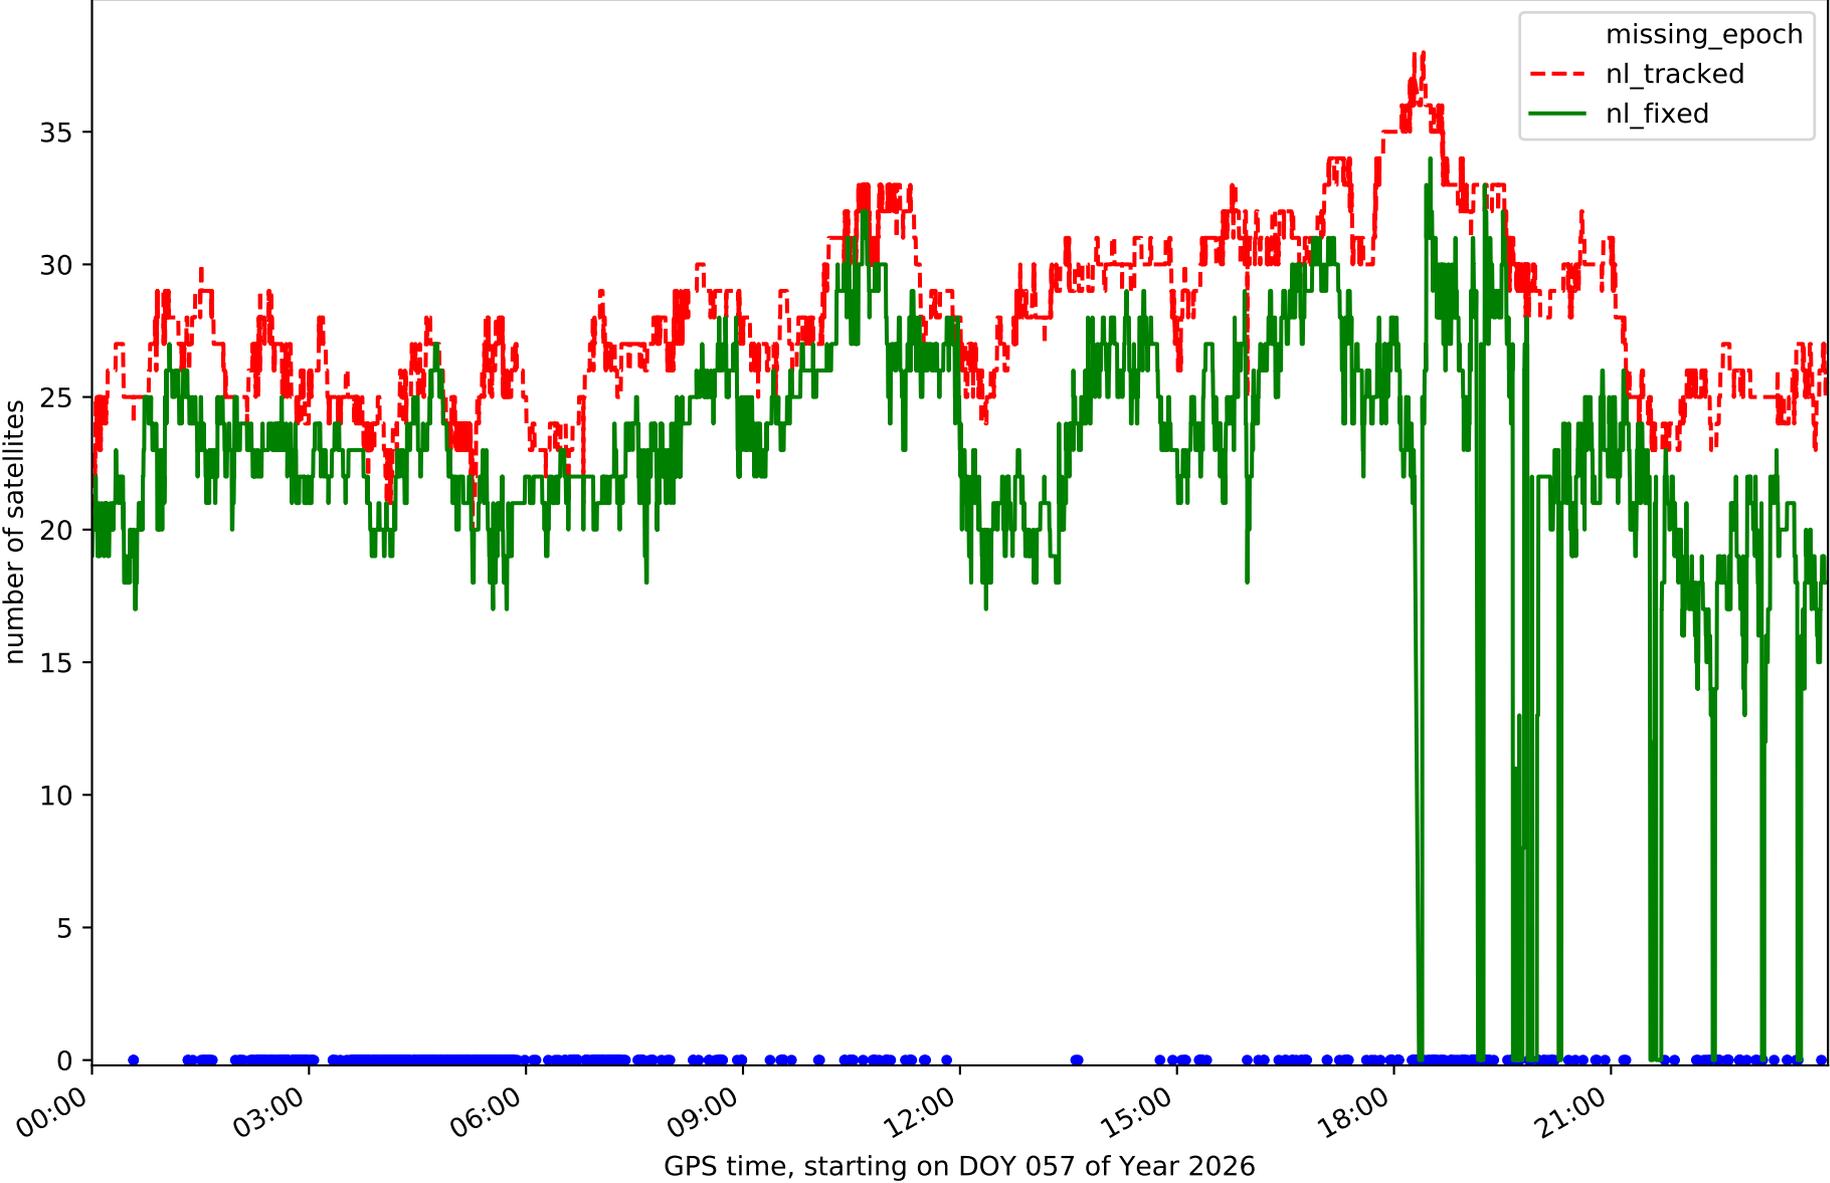


Station TN09 in network NT32

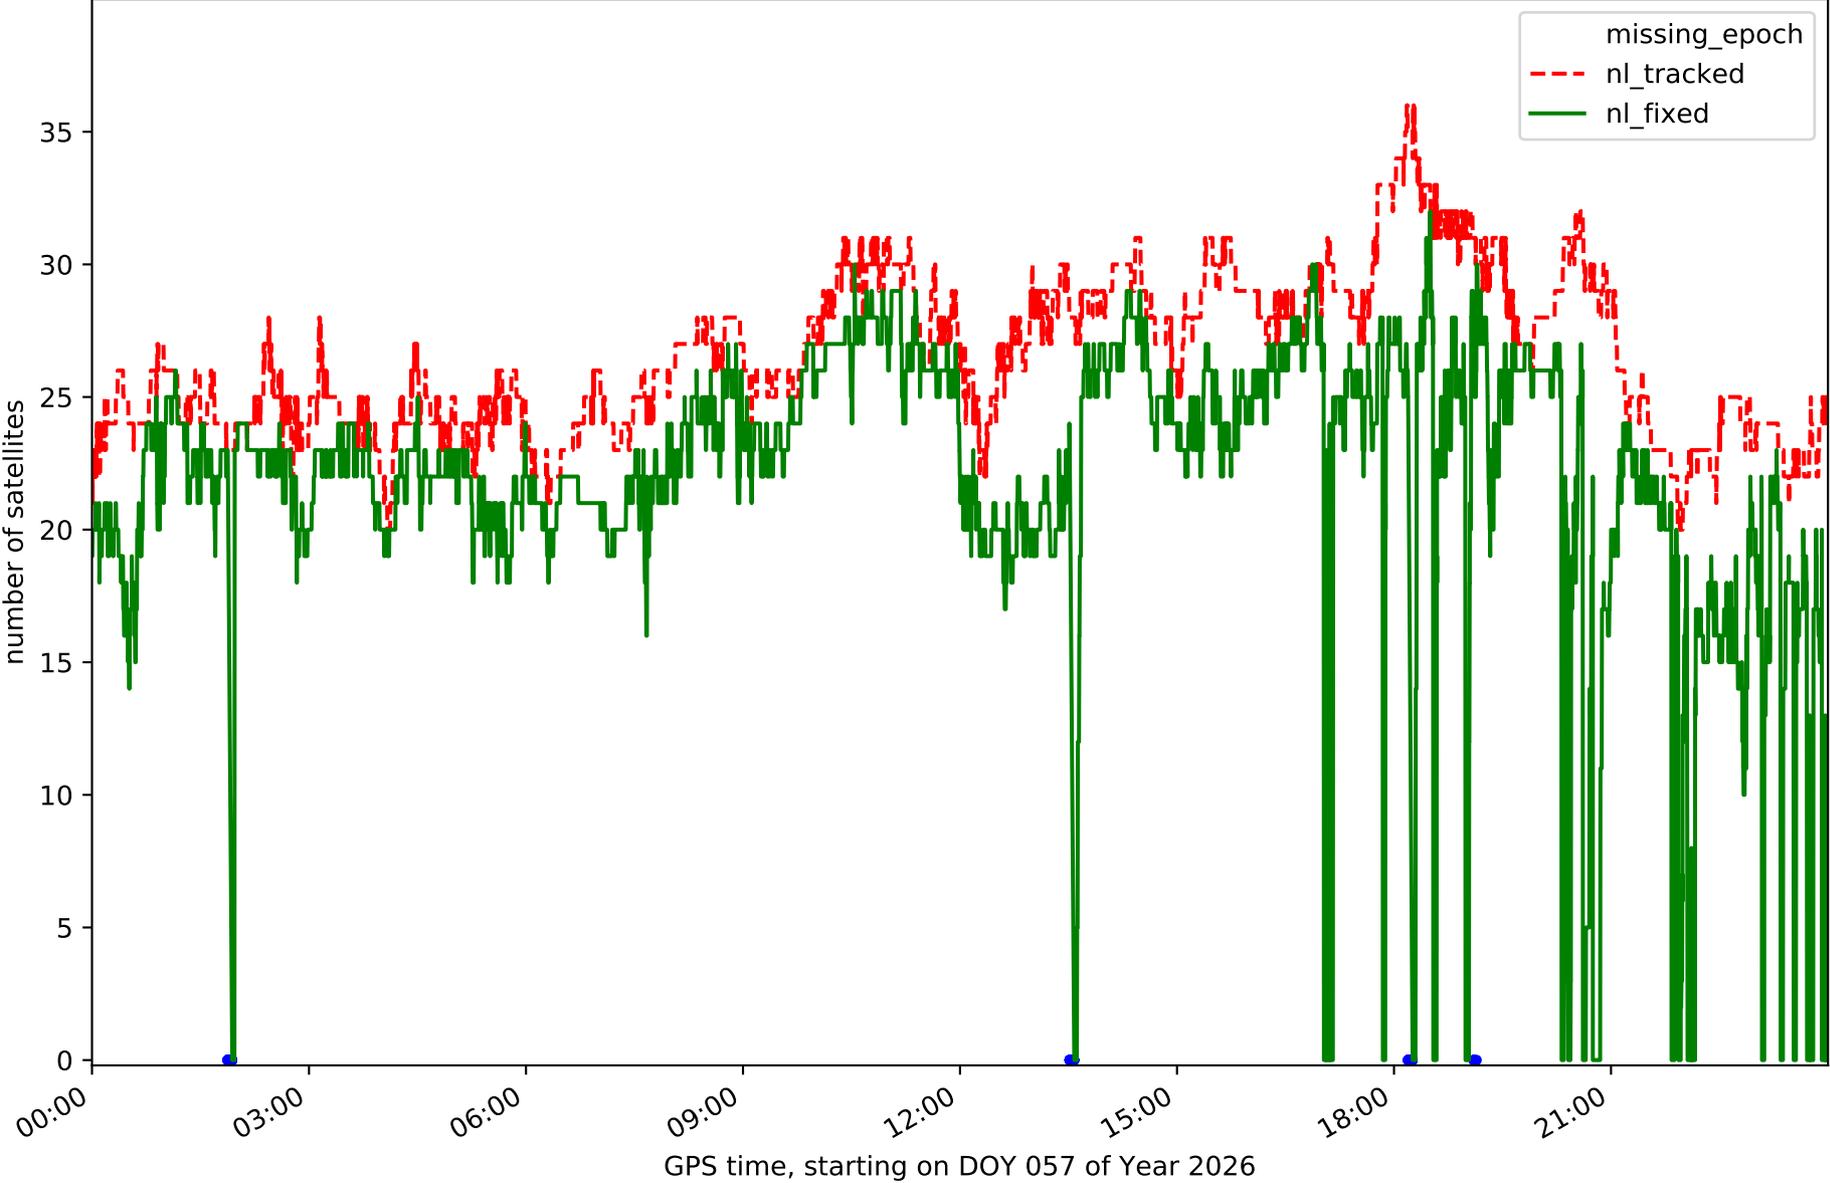


Station TE11 in network NT32

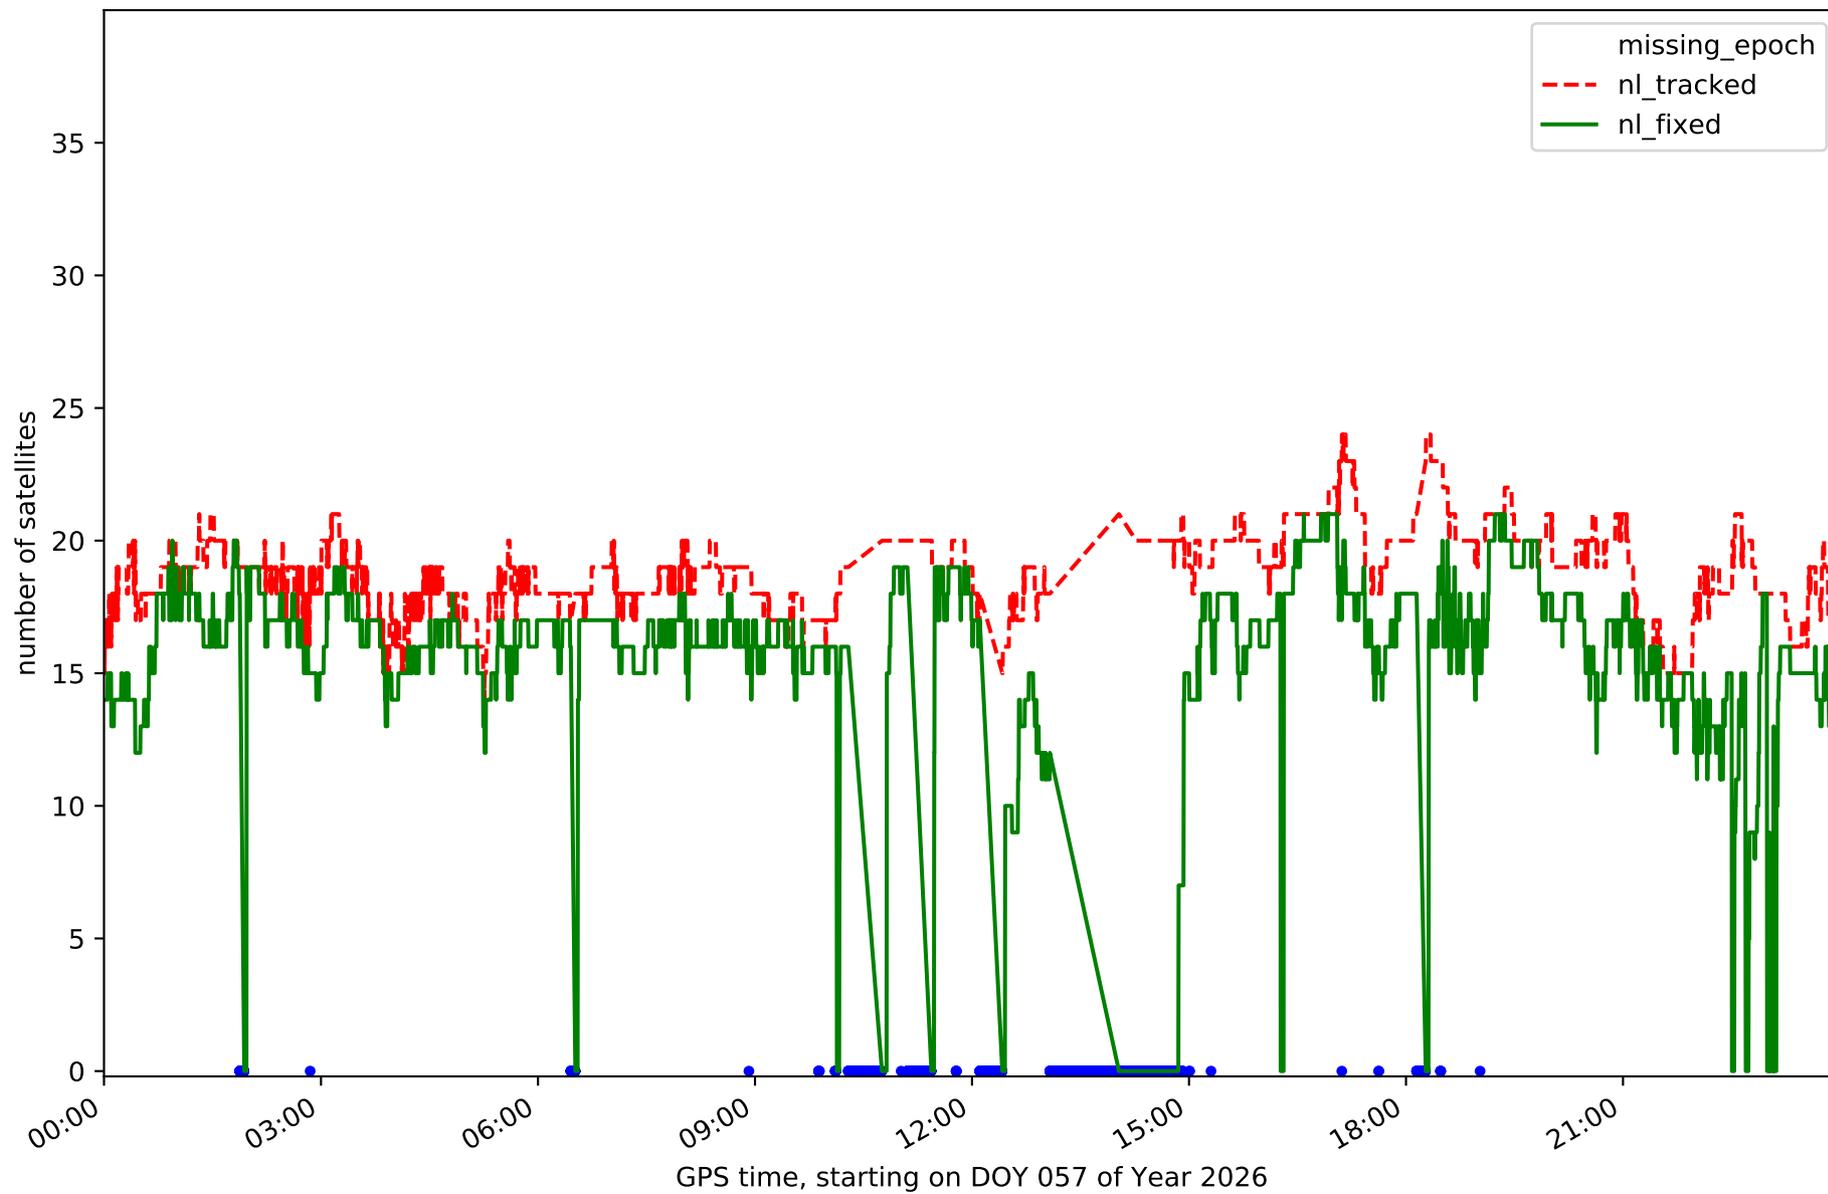


RefCheck for station EH01 in network NT32

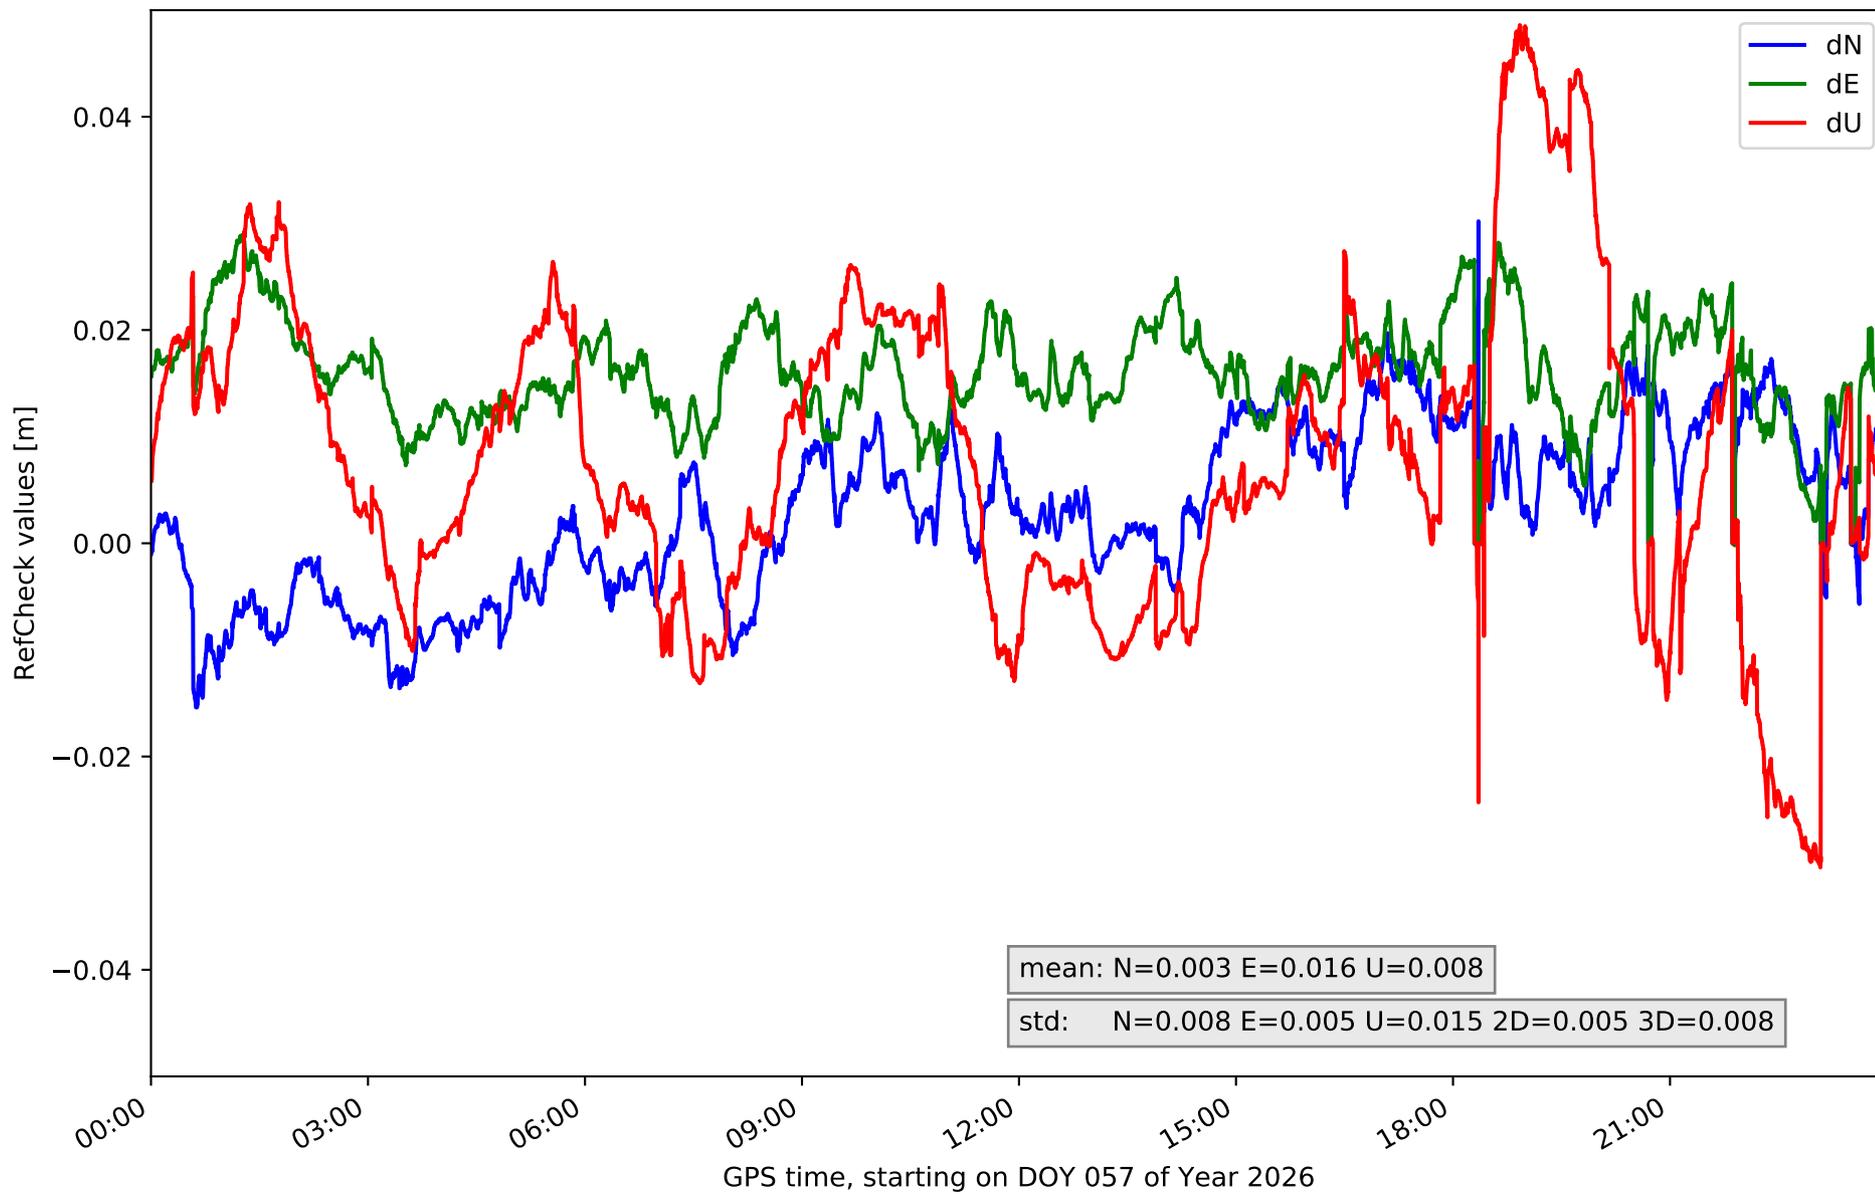


RefCheck for station EH02 in network NT32

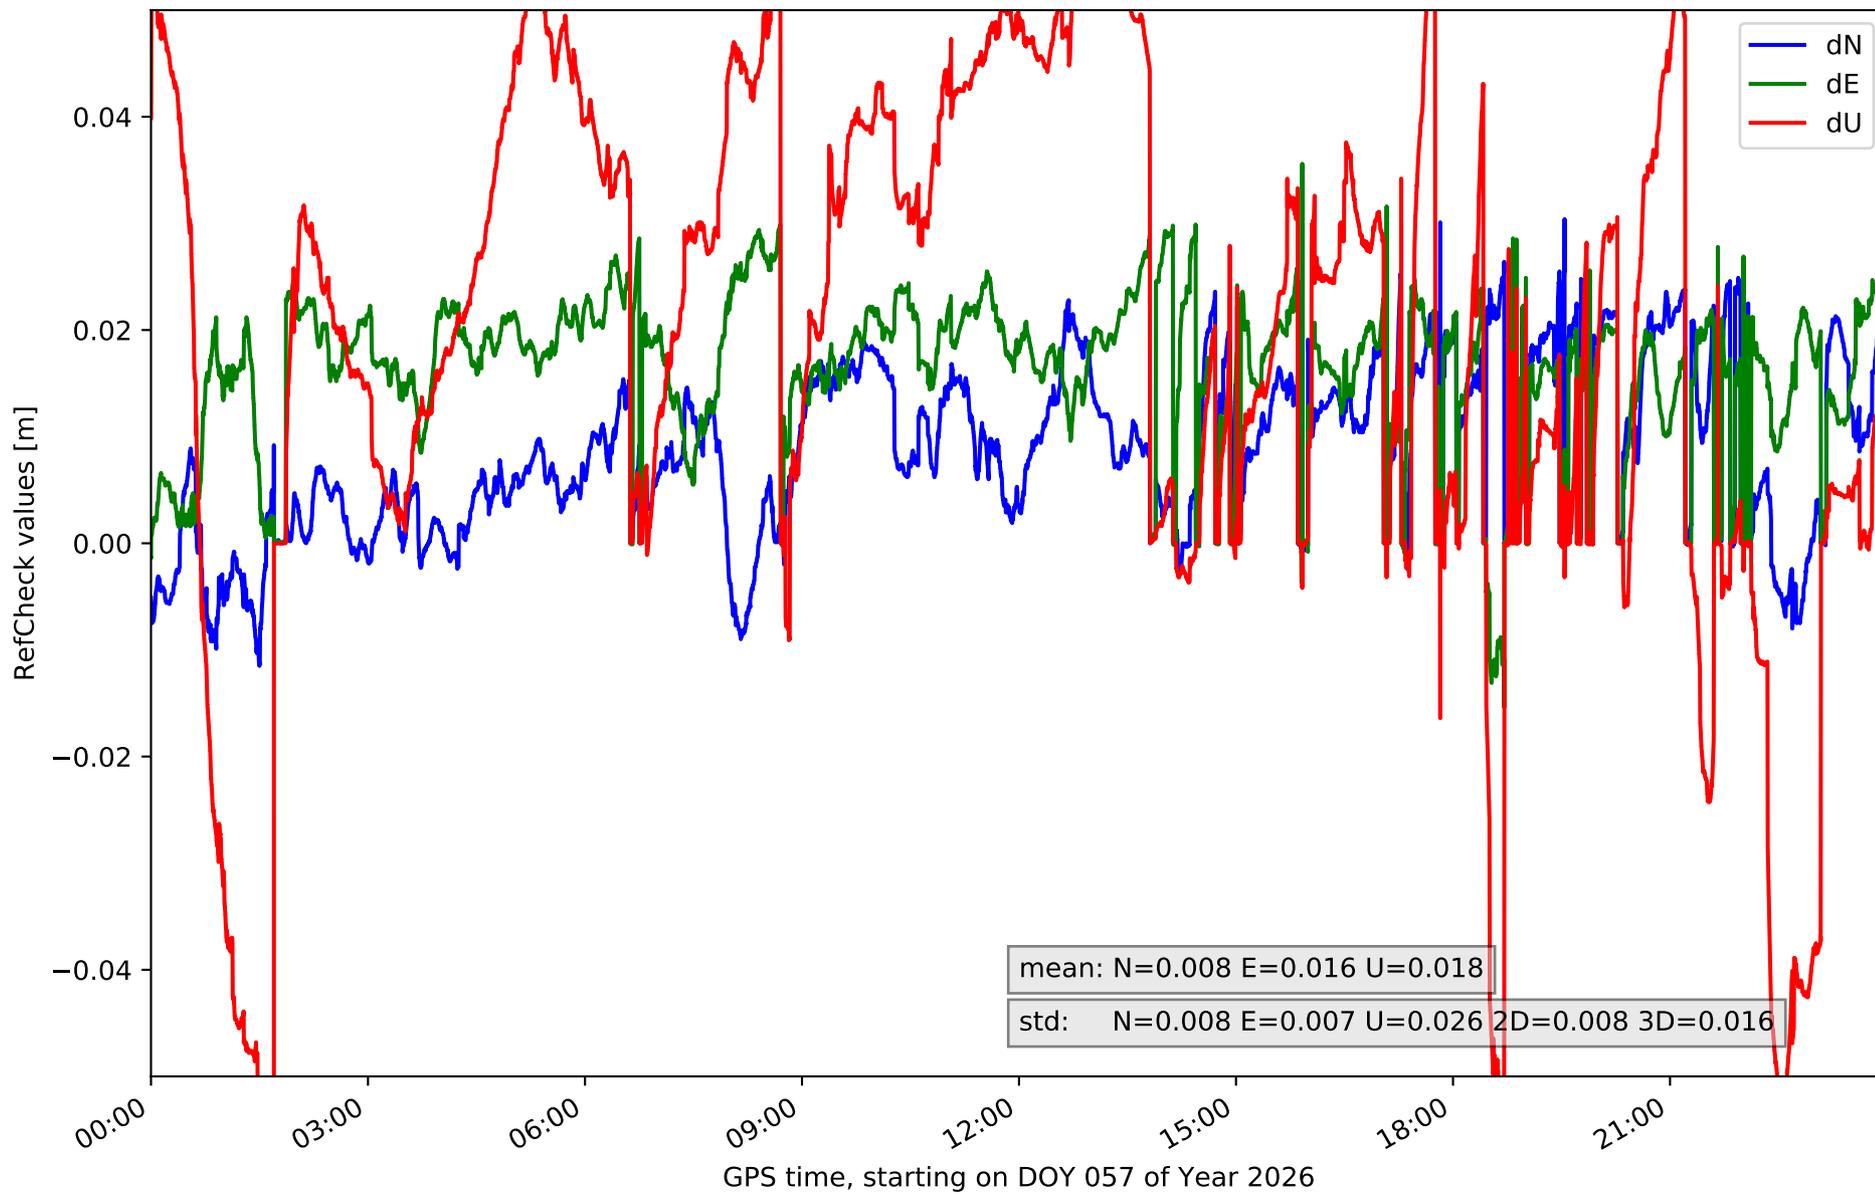


RefCheck for station GOM1 in network NT32

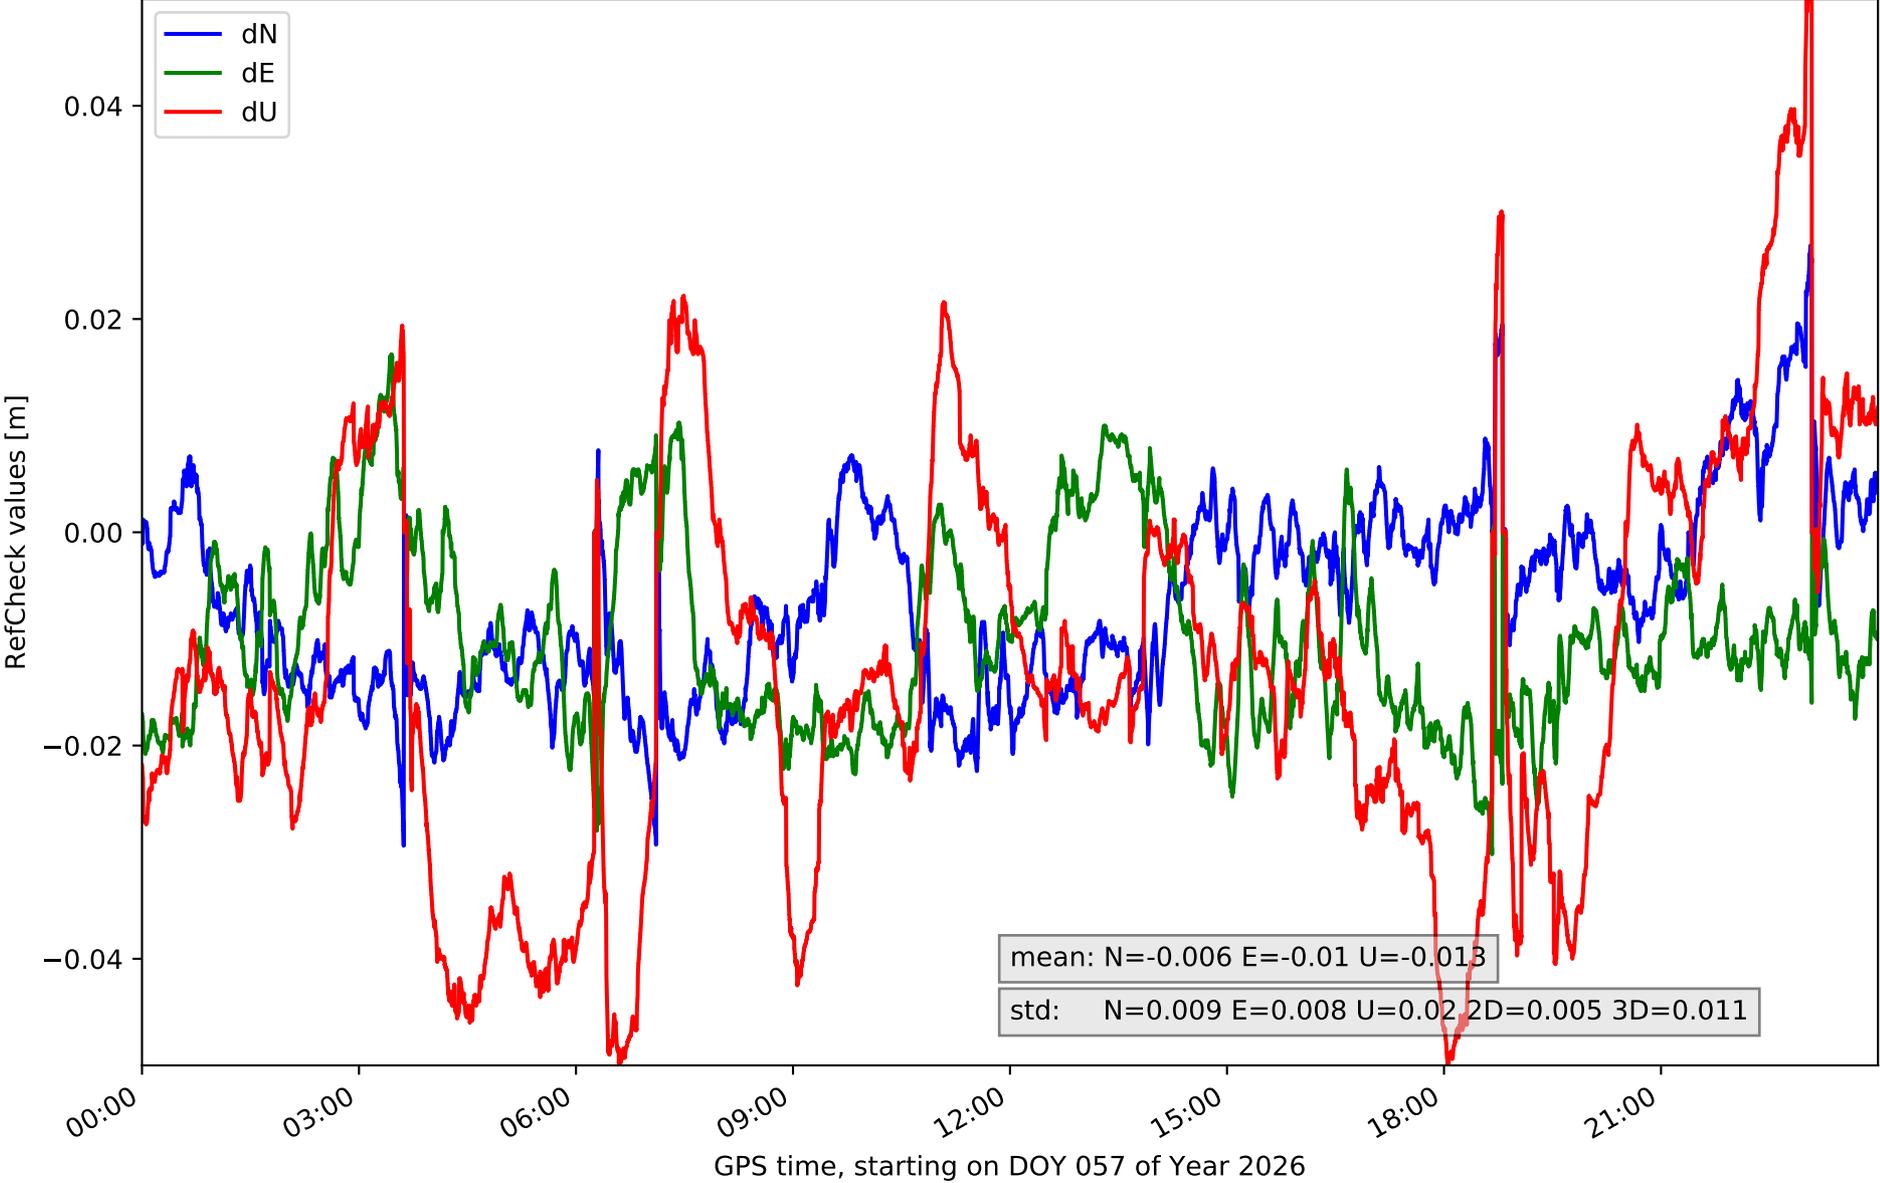


RefCheck for station GOME in network NT32

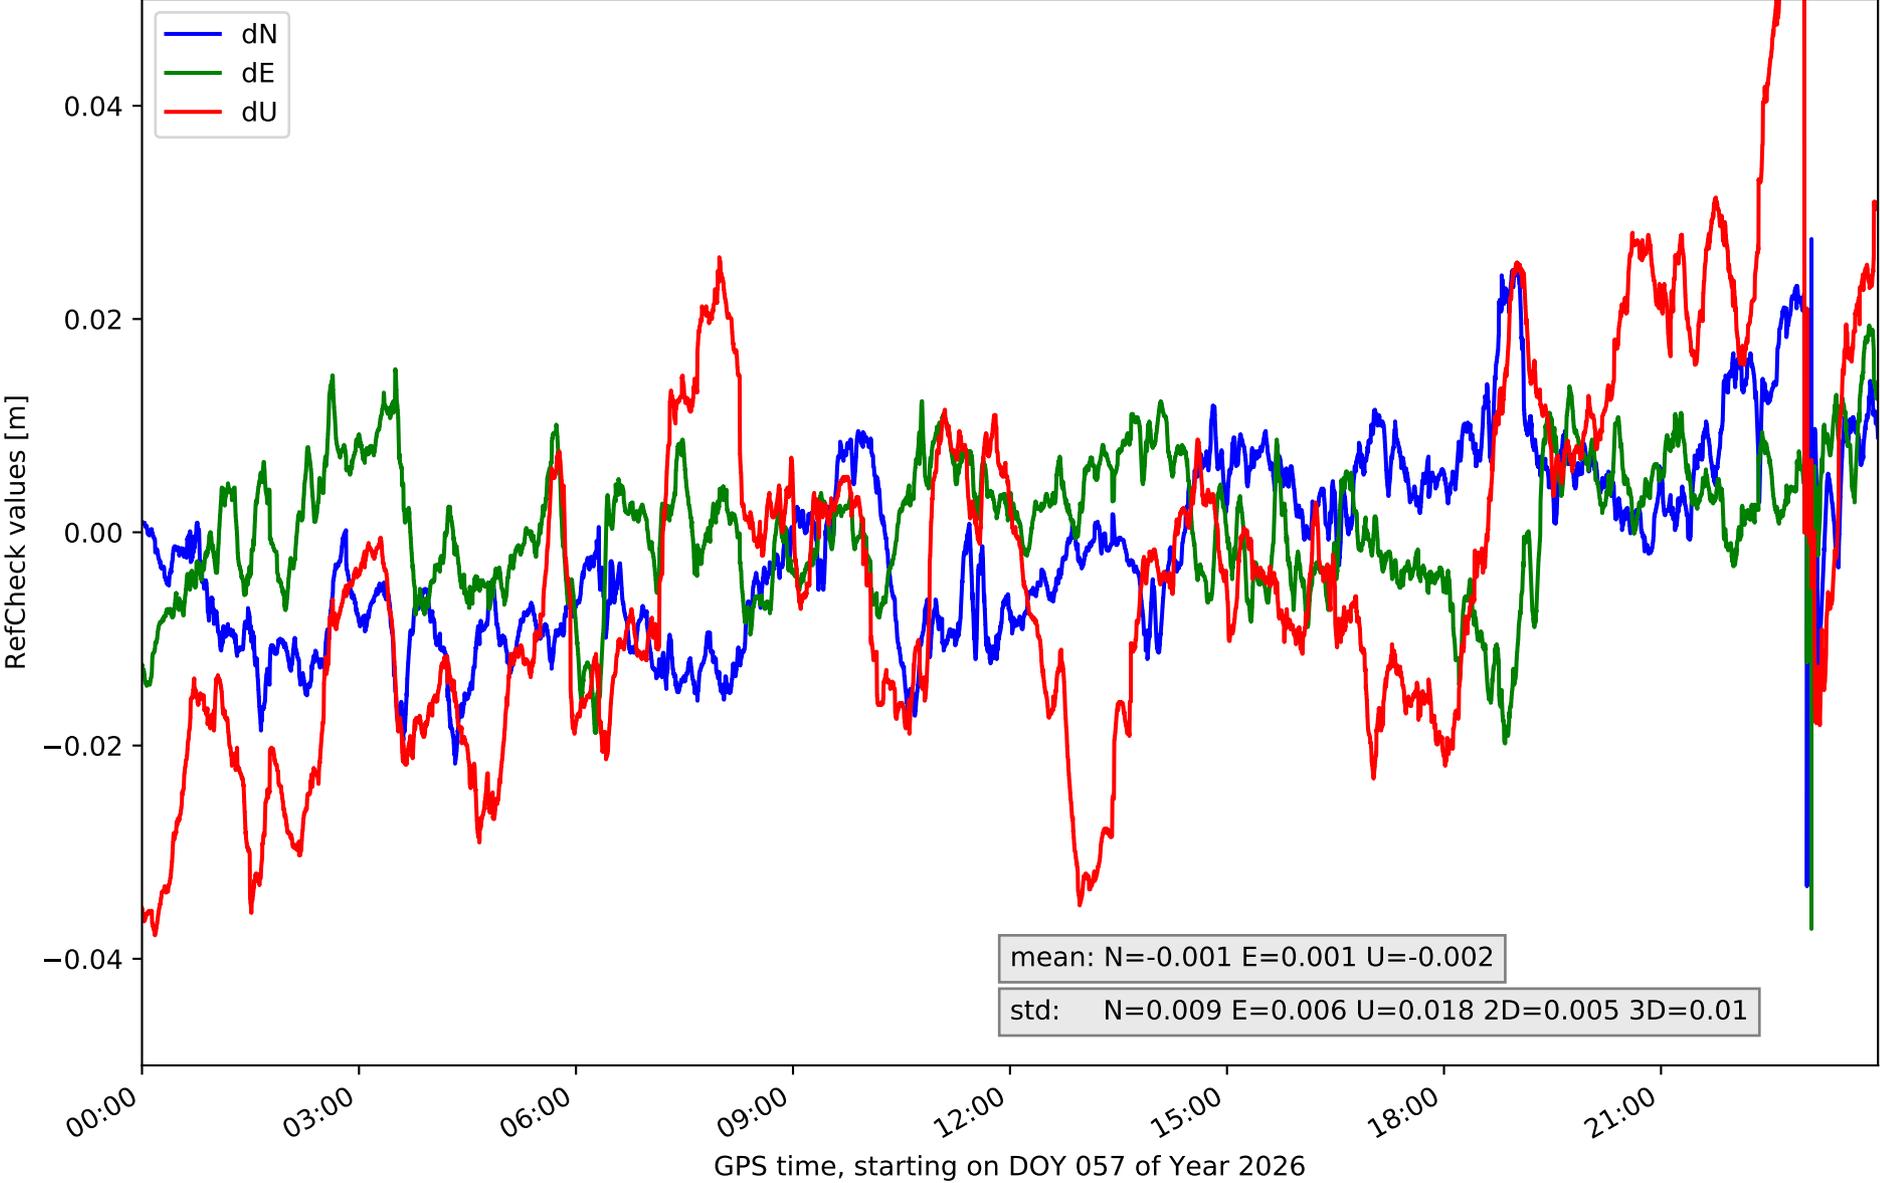


RefCheck for station IZAN in network NT32

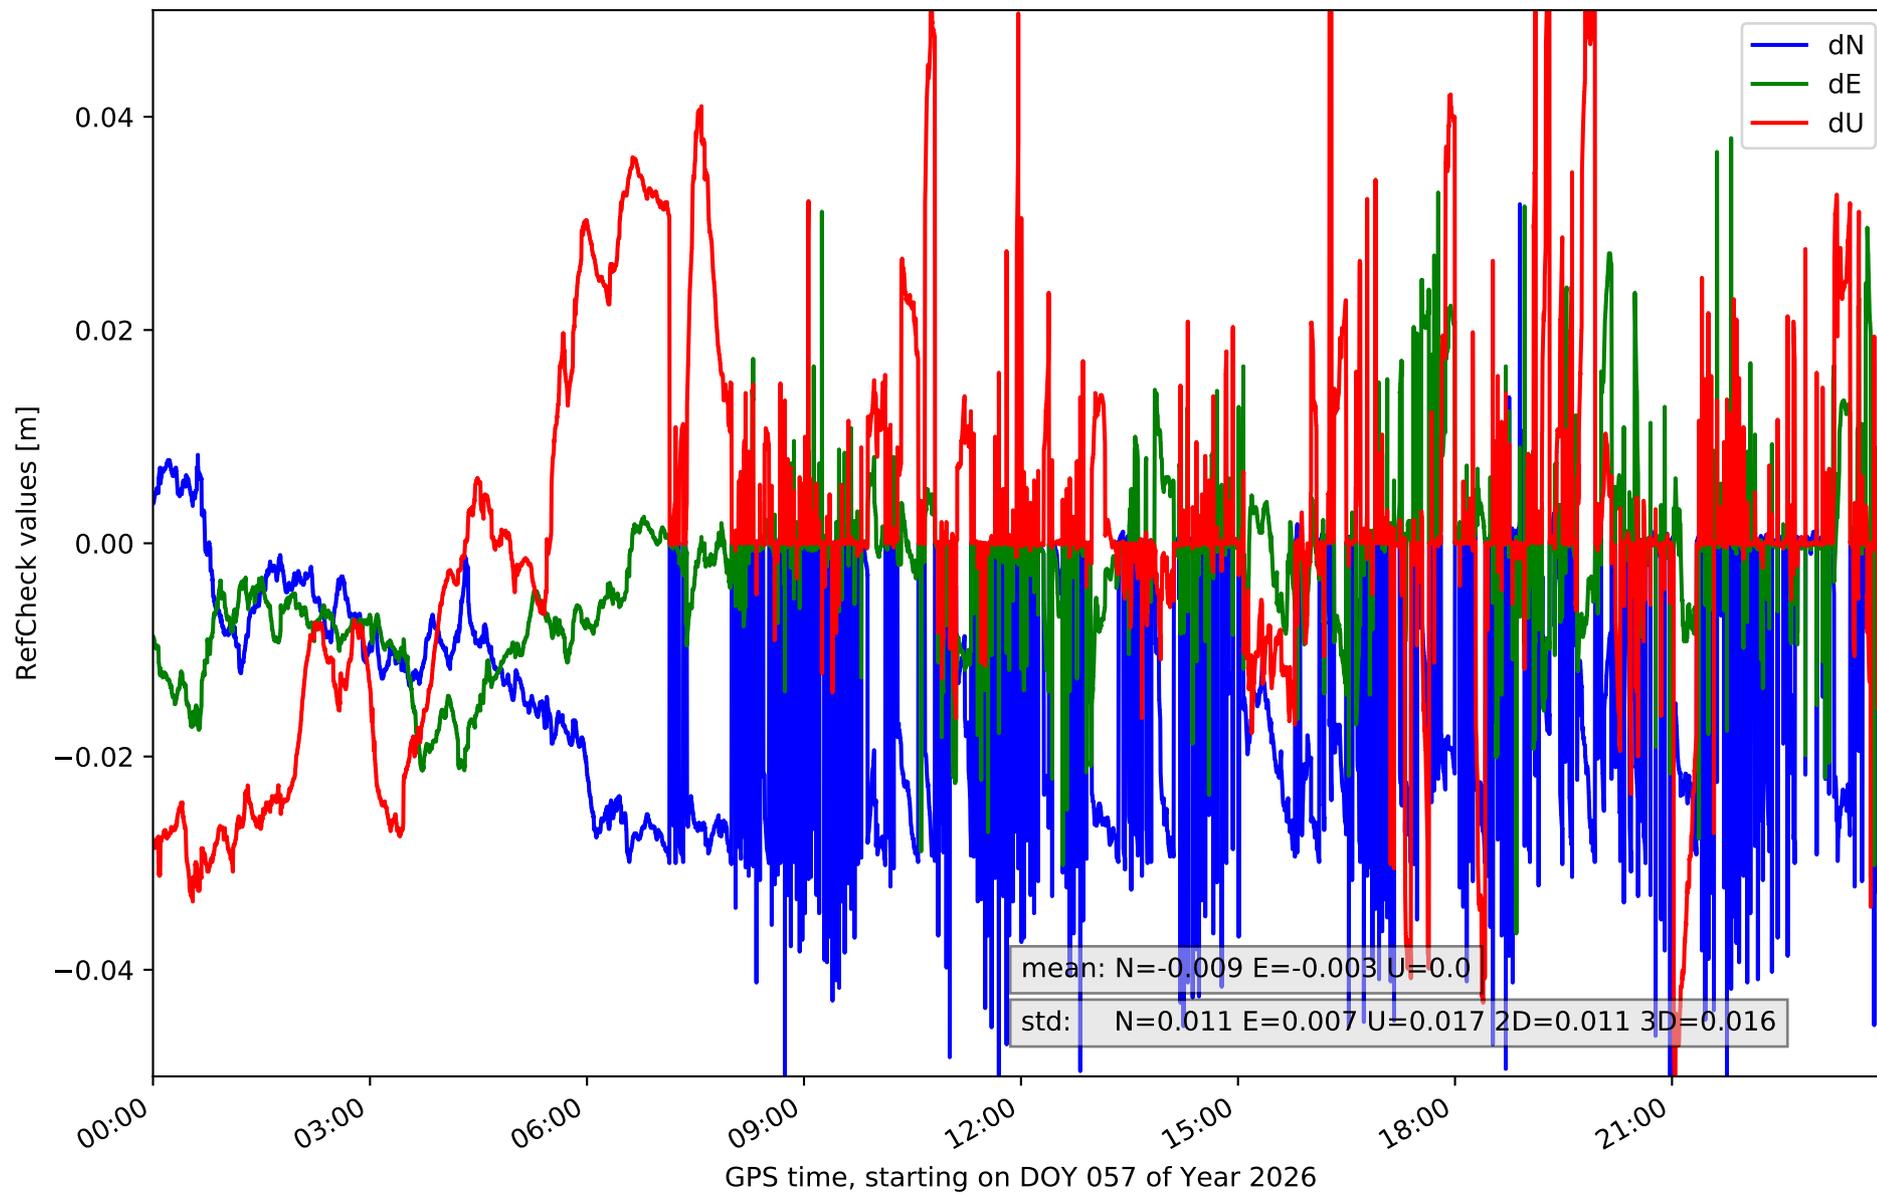


RefCheck for station LP01 in network NT32

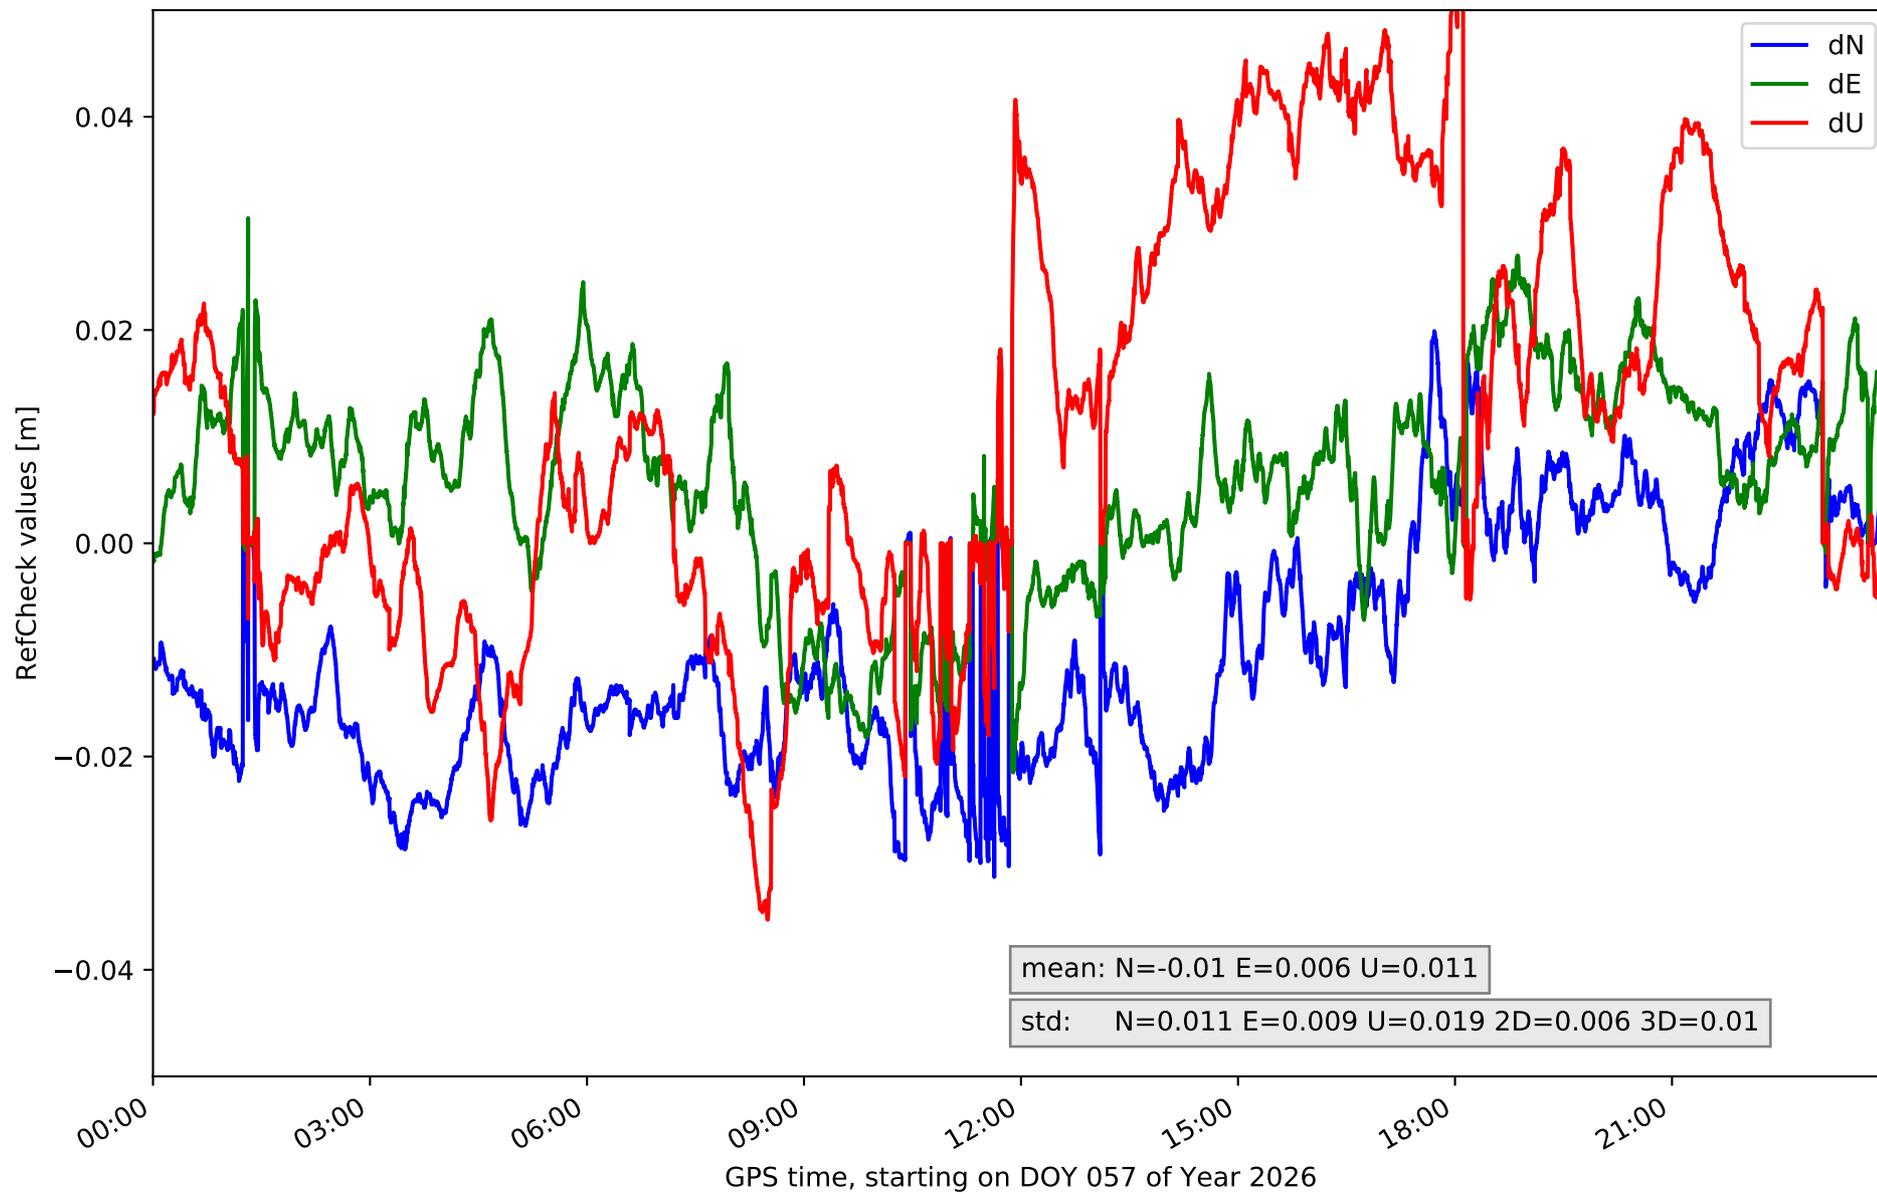


RefCheck for station LP03 in network NT32

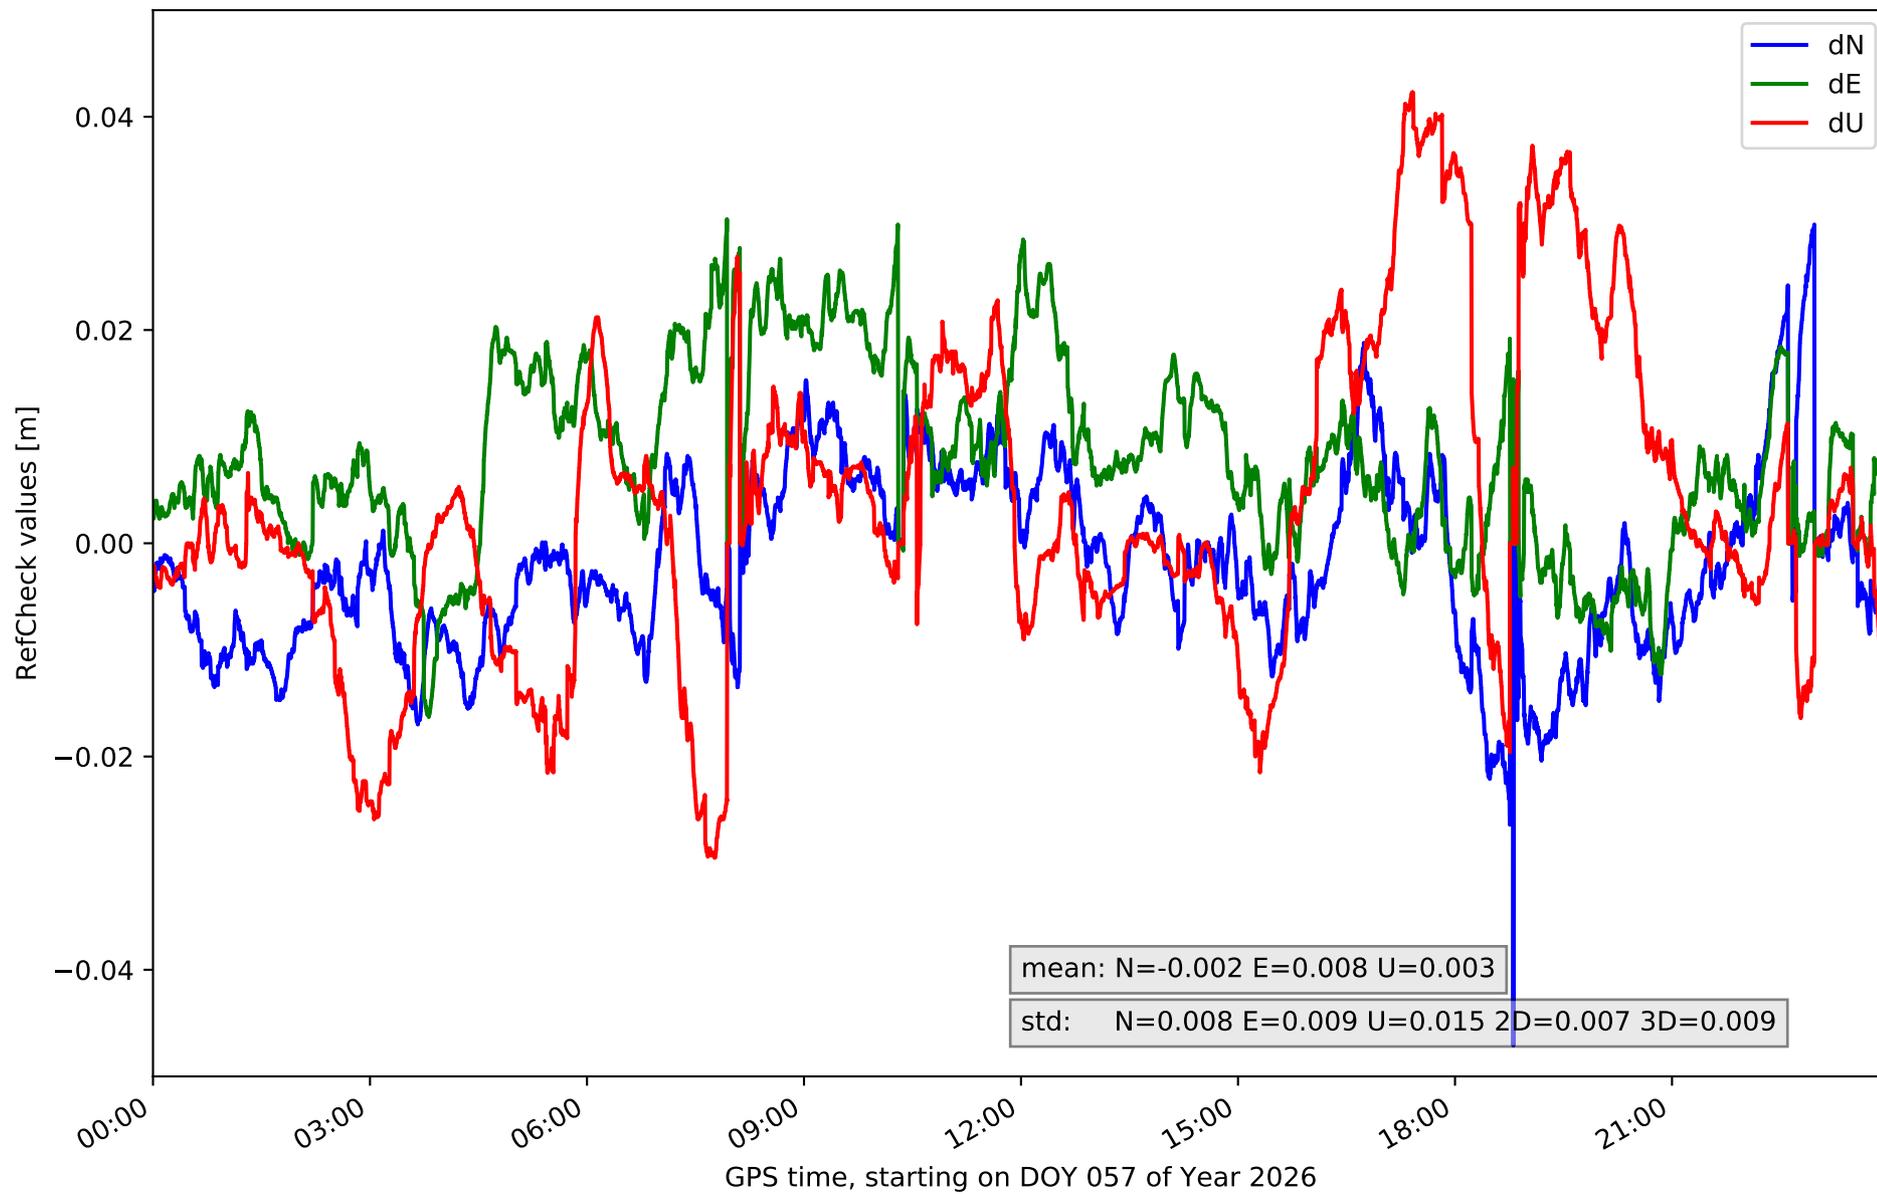


RefCheck for station LPAL in network NT32

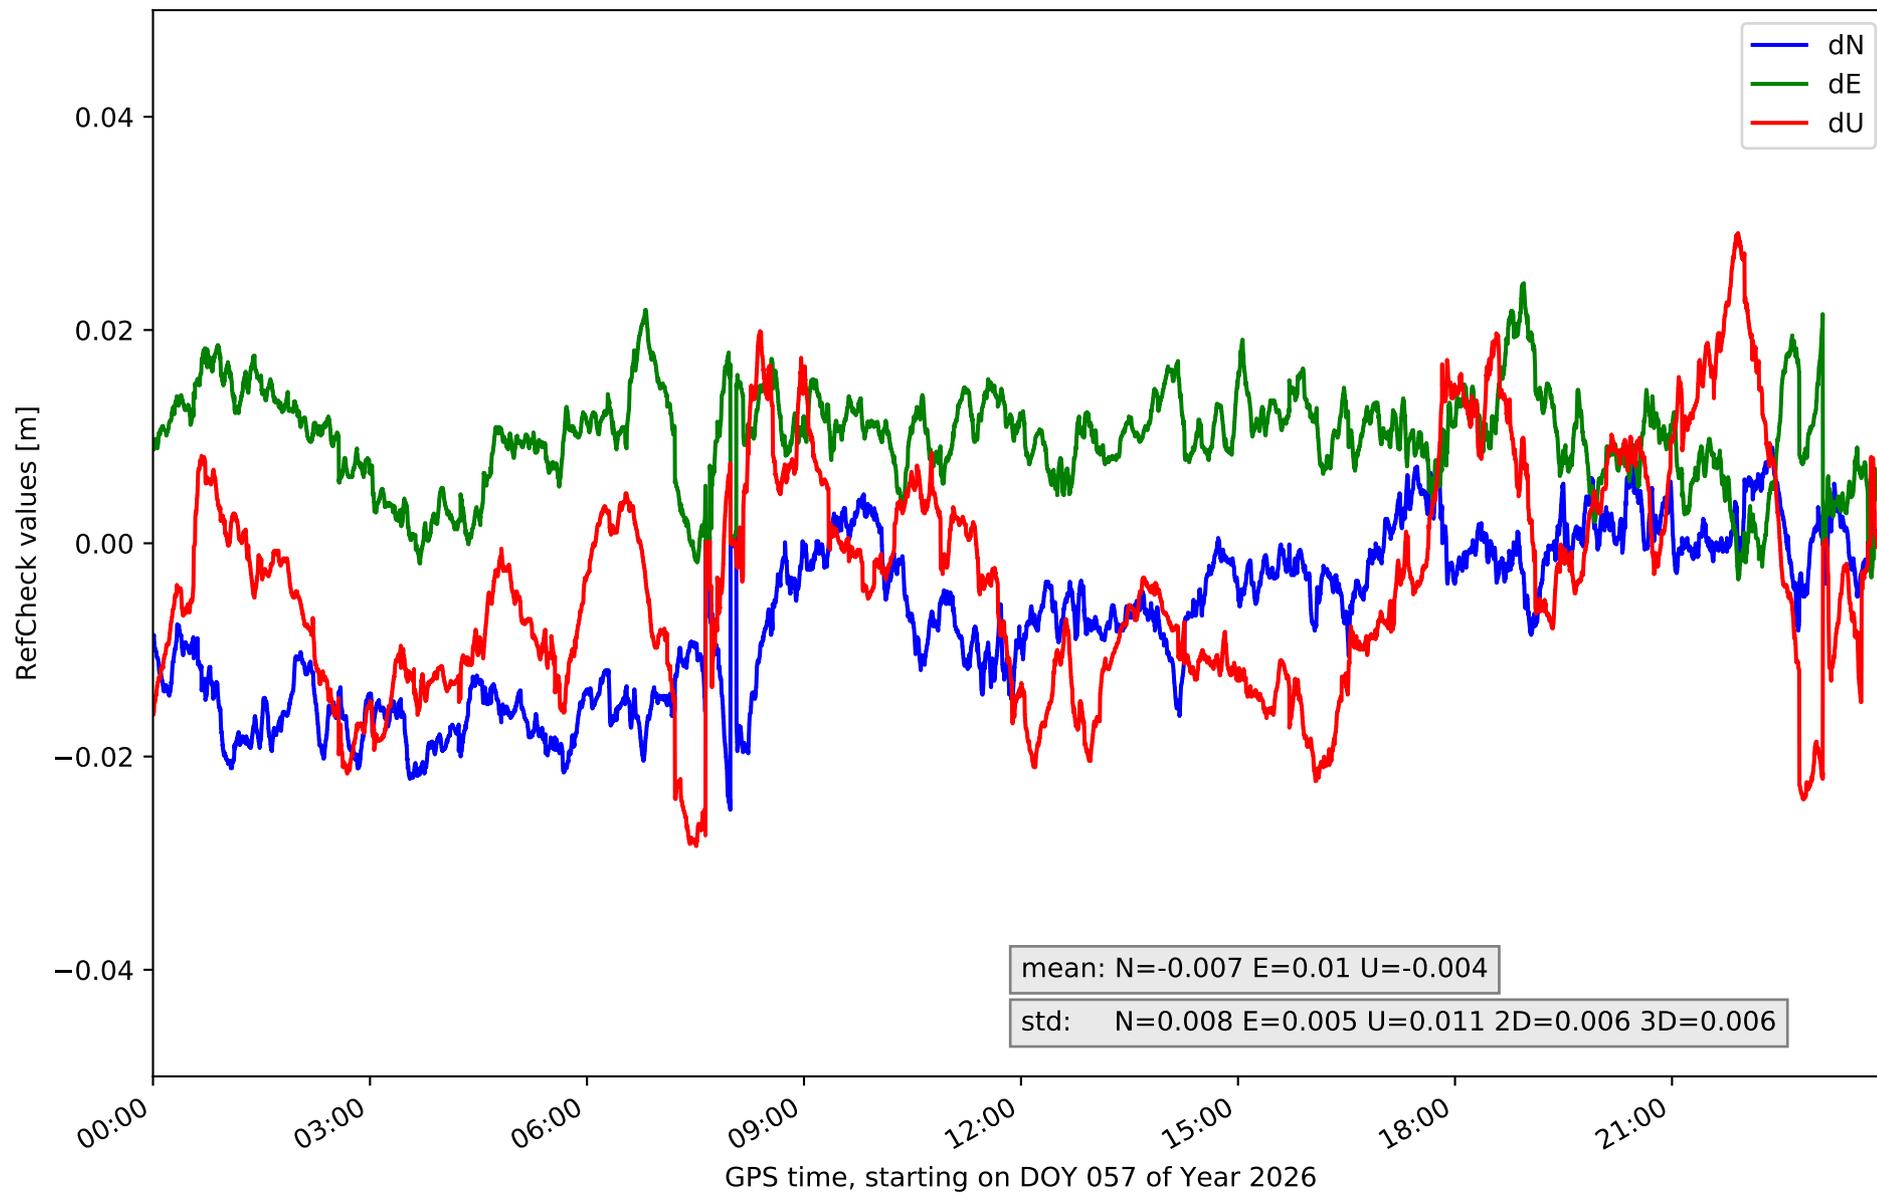


RefCheck for station LRES in network NT32

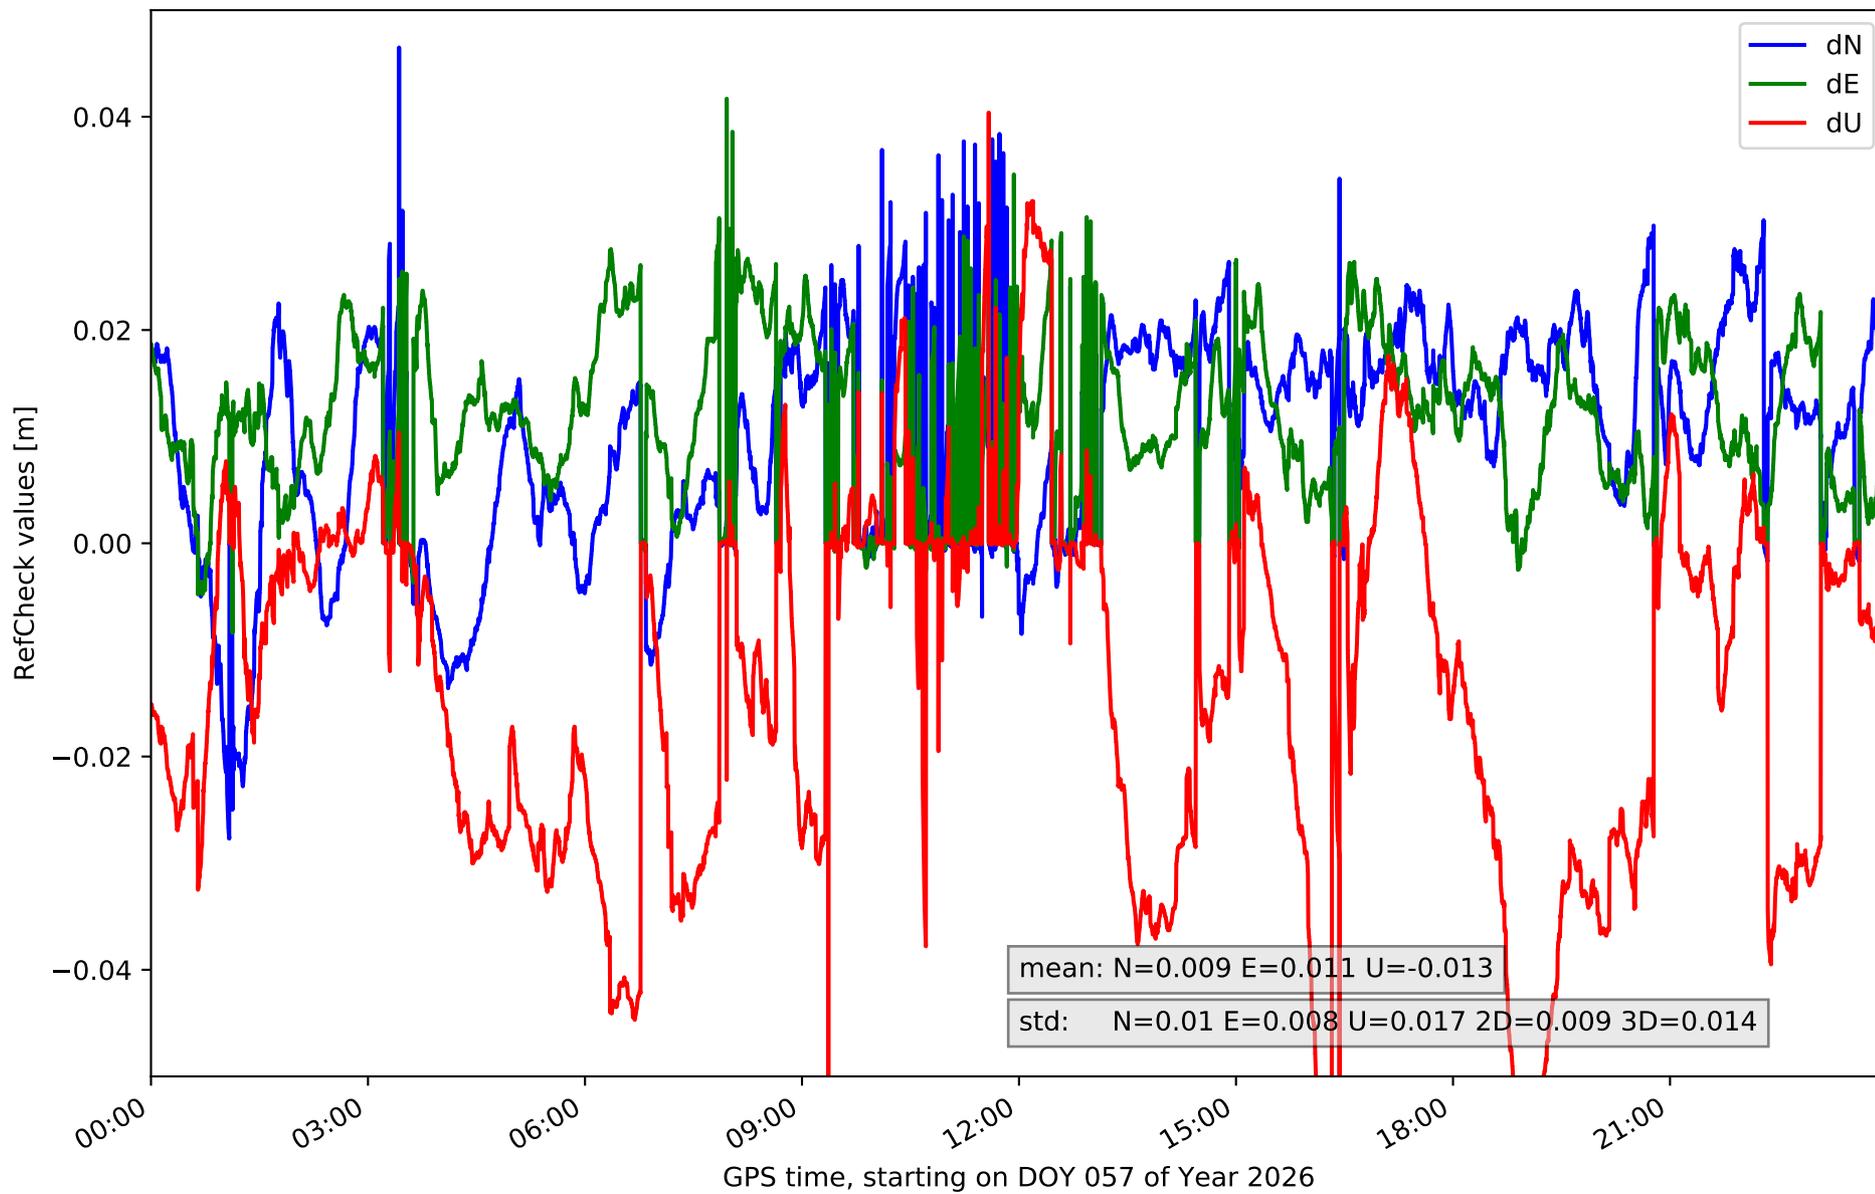


RefCheck for station TN01 in network NT32

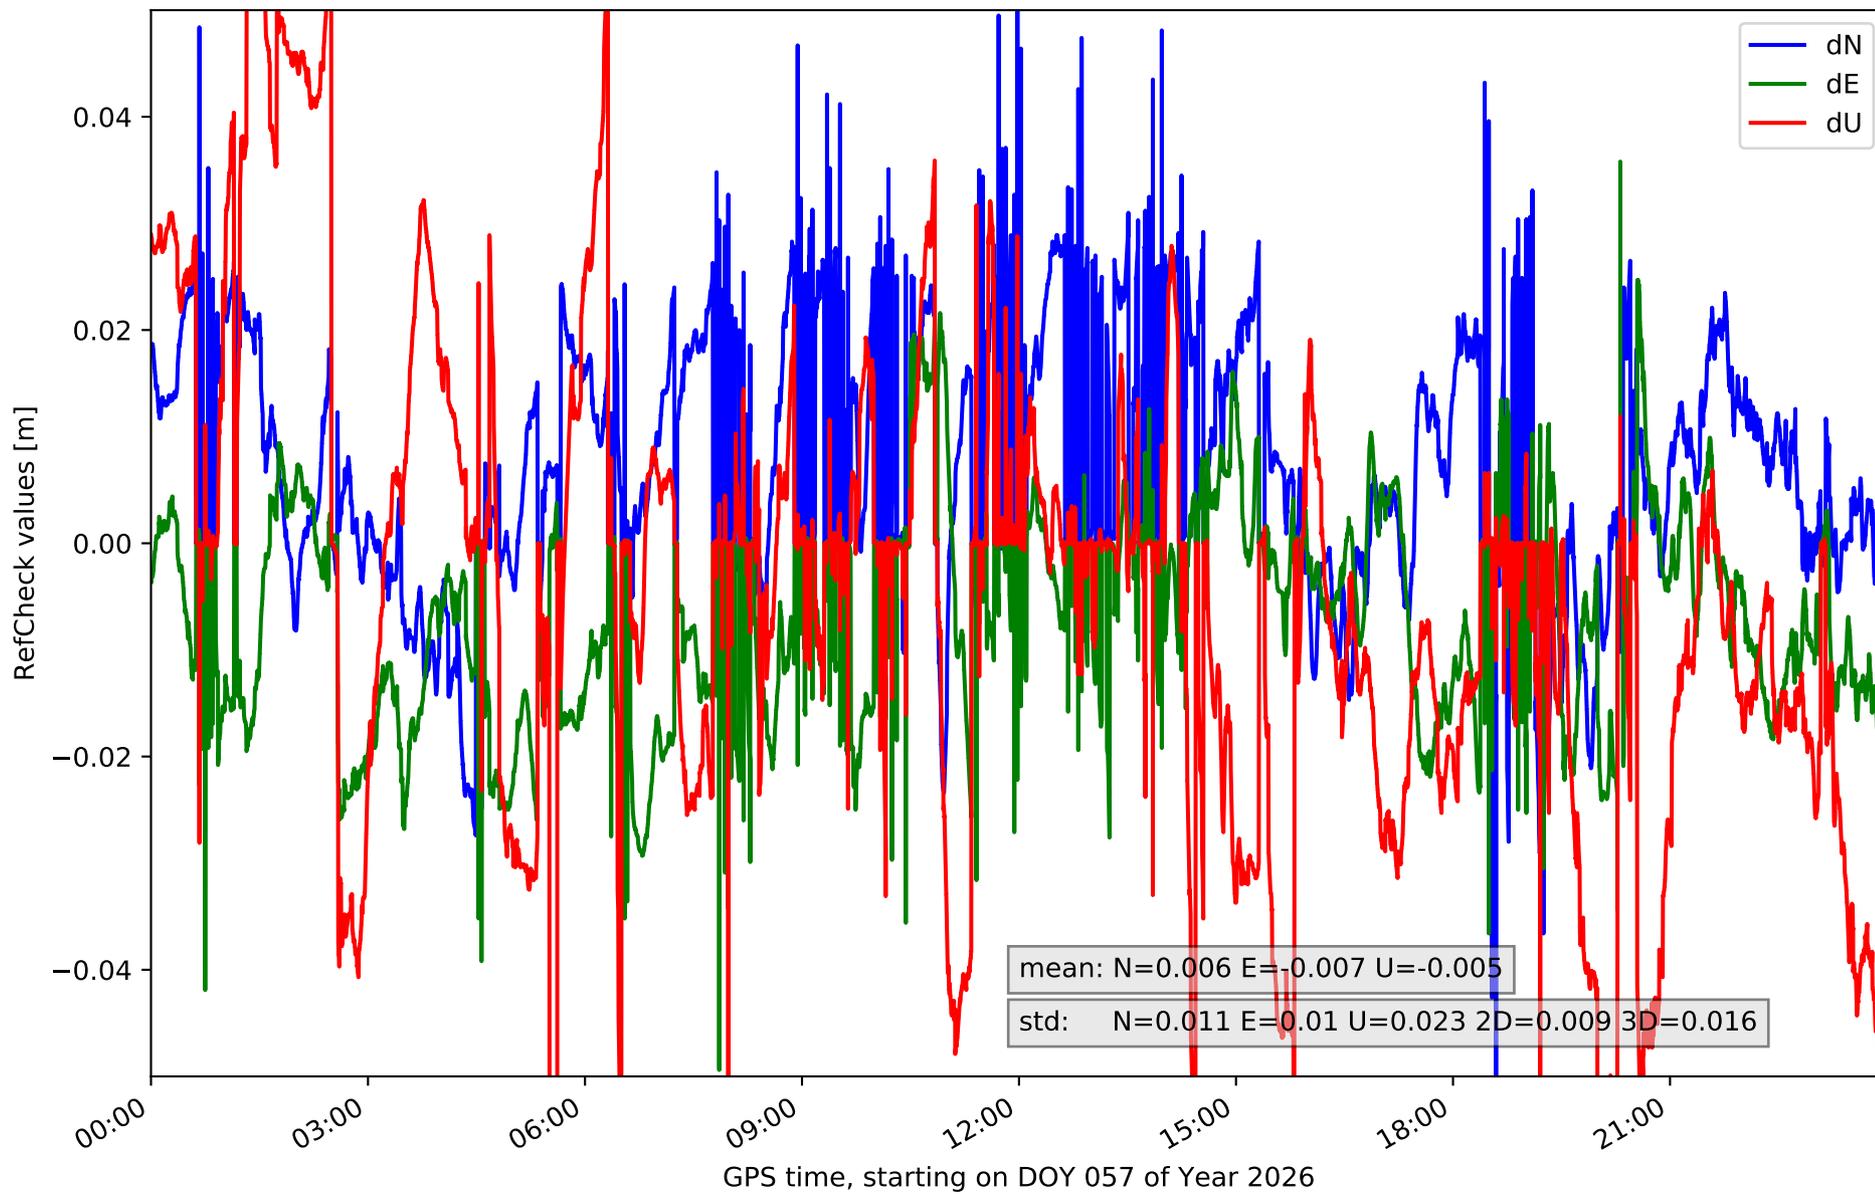


RefCheck for station TN02 in network NT32

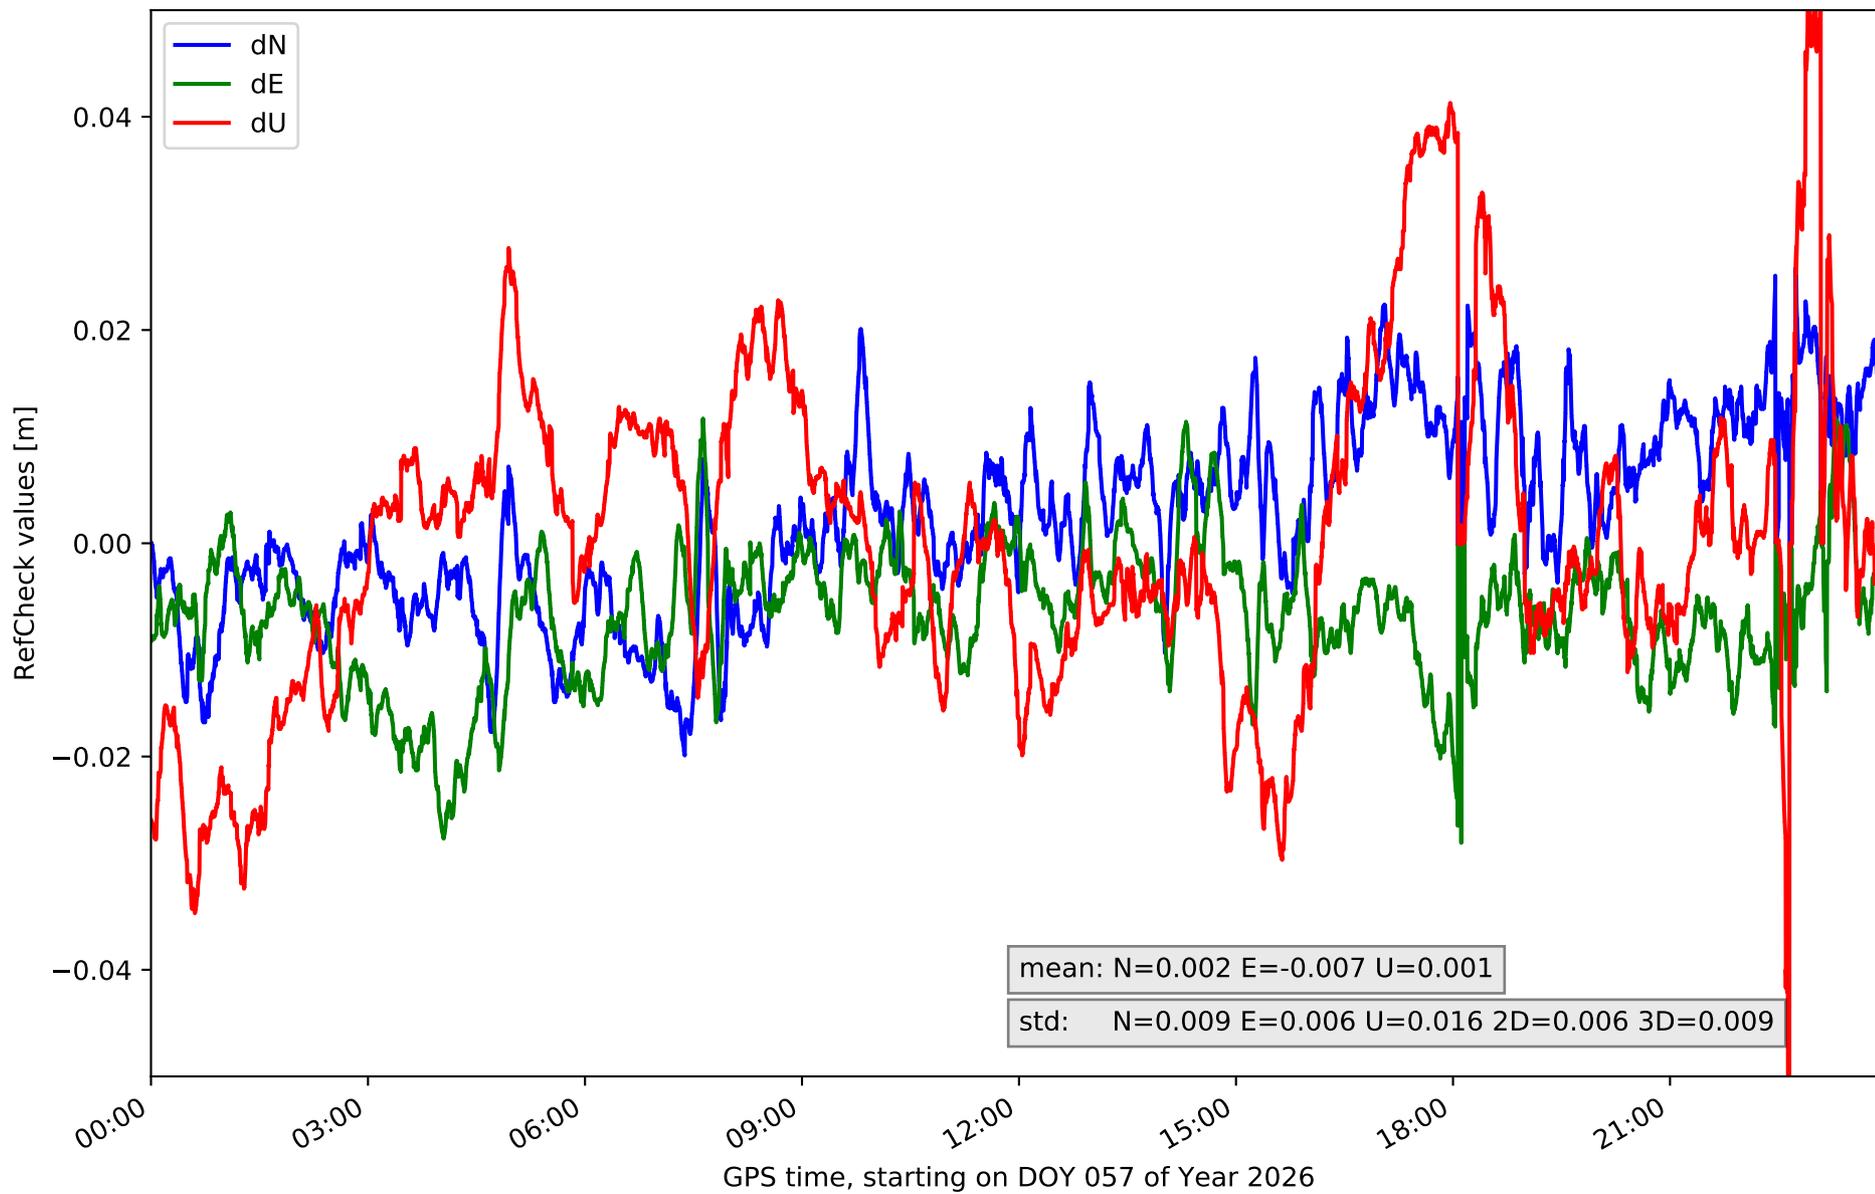


RefCheck for station TN03 in network NT32

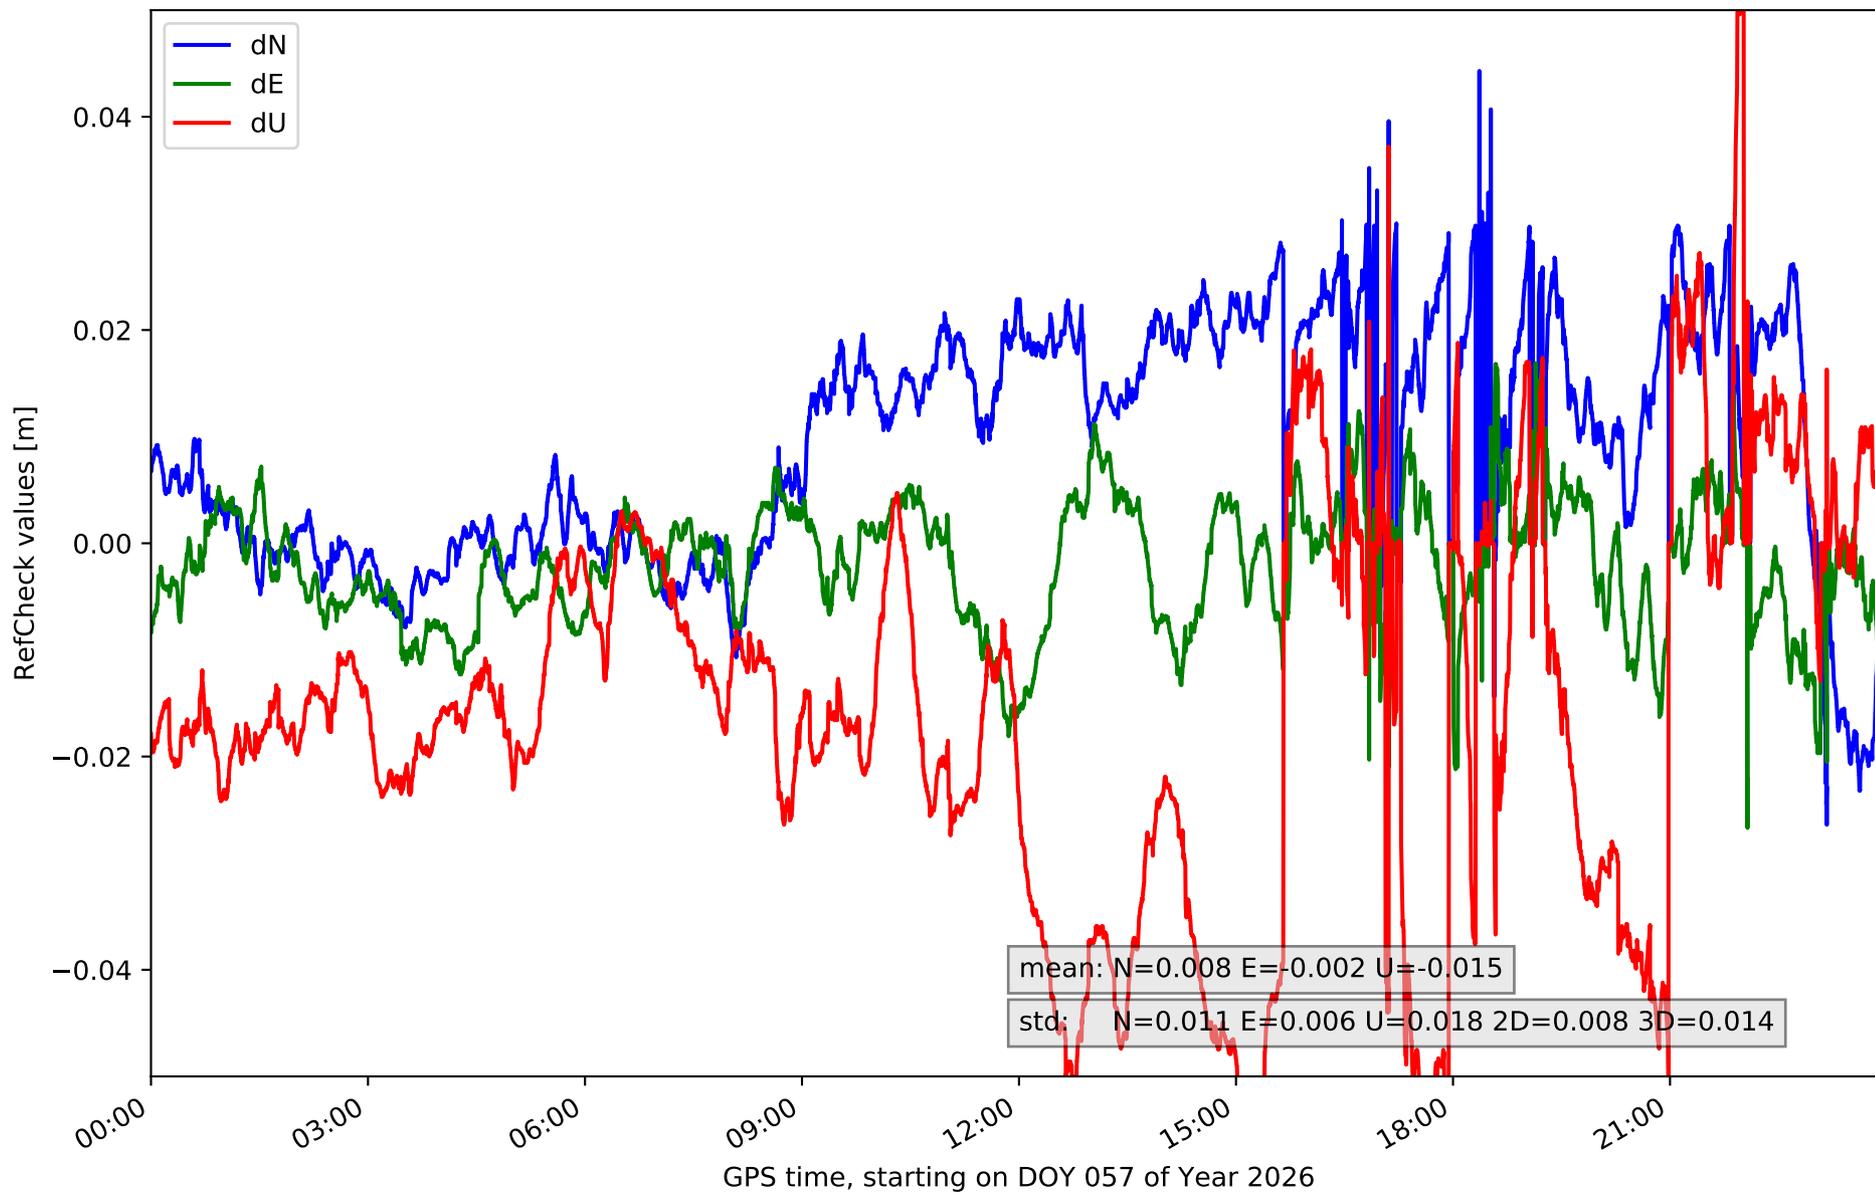


RefCheck for station TN06 in network NT32

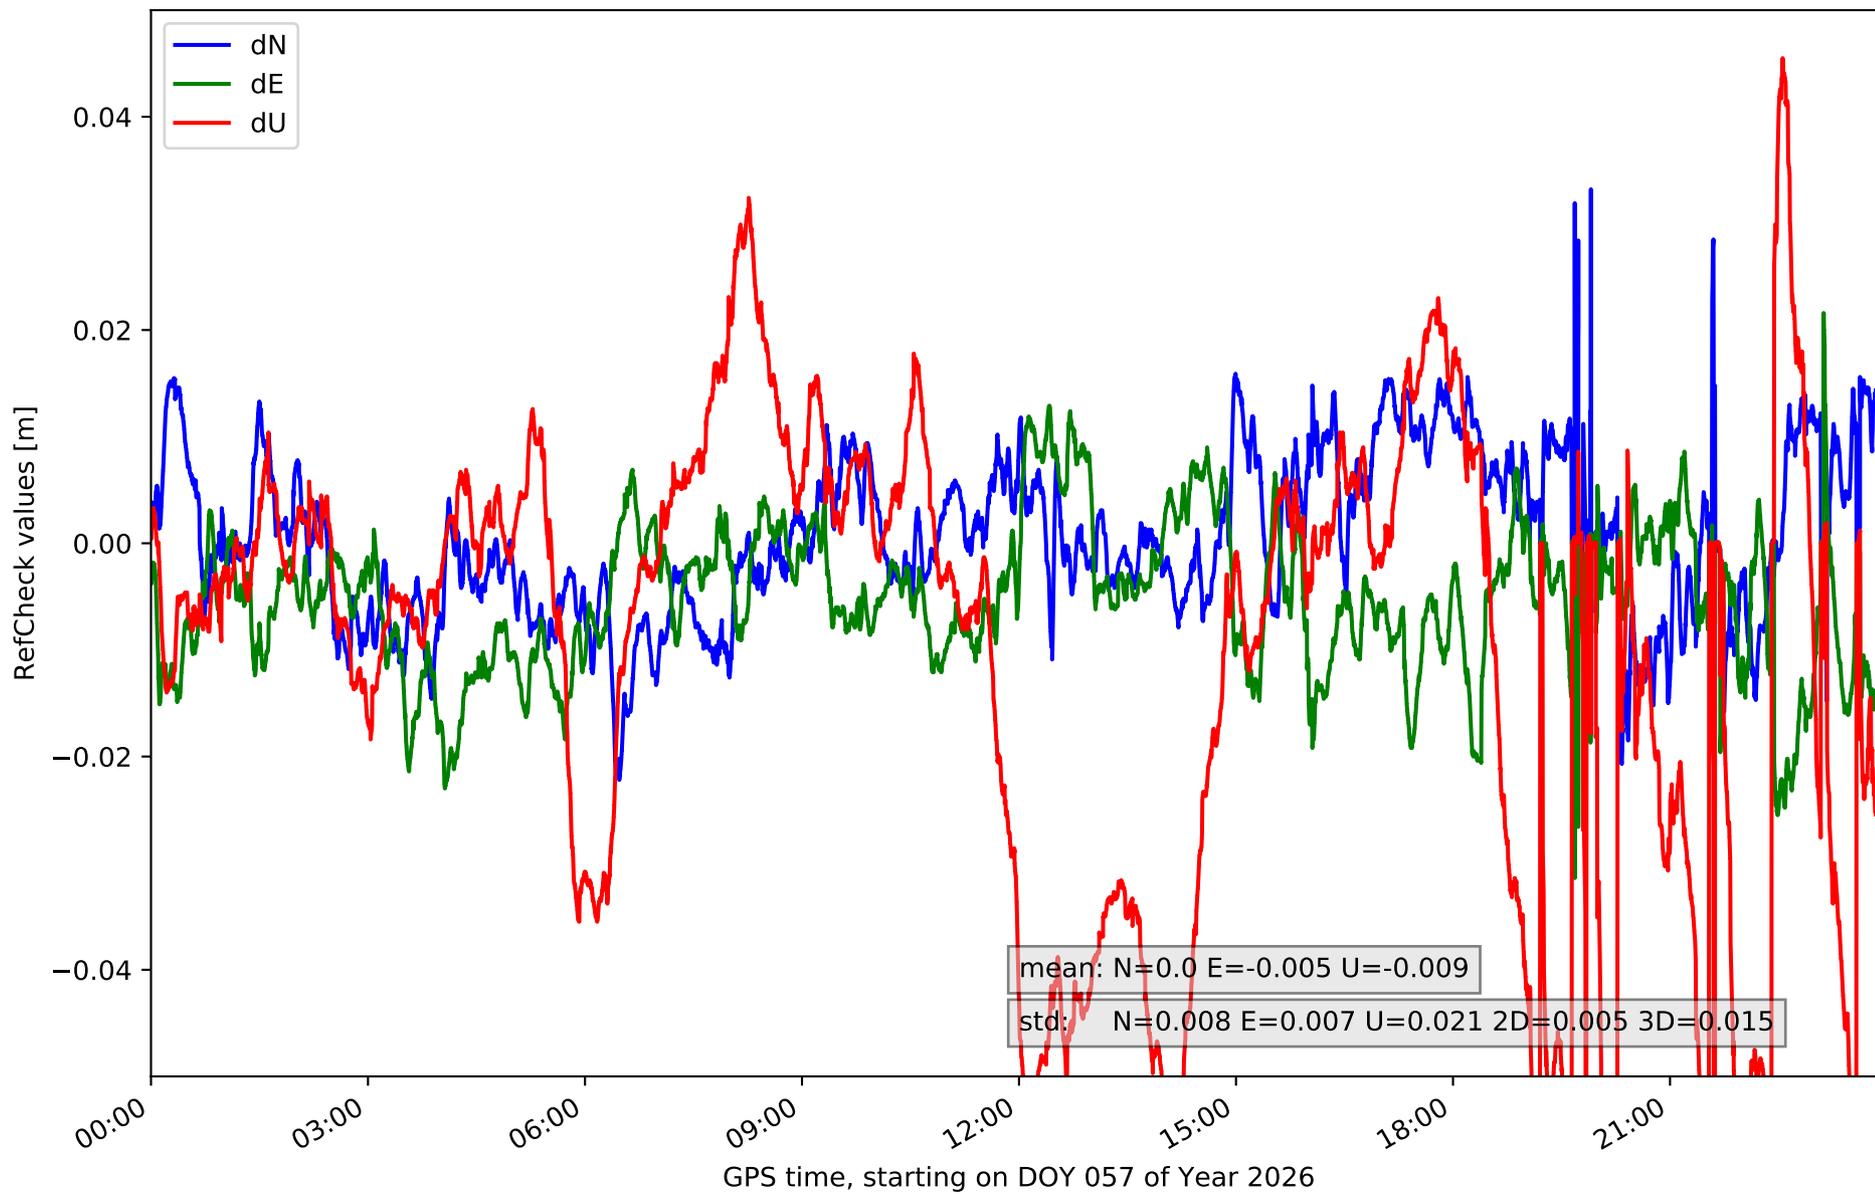

RefCheck for station TN09 in network NT32

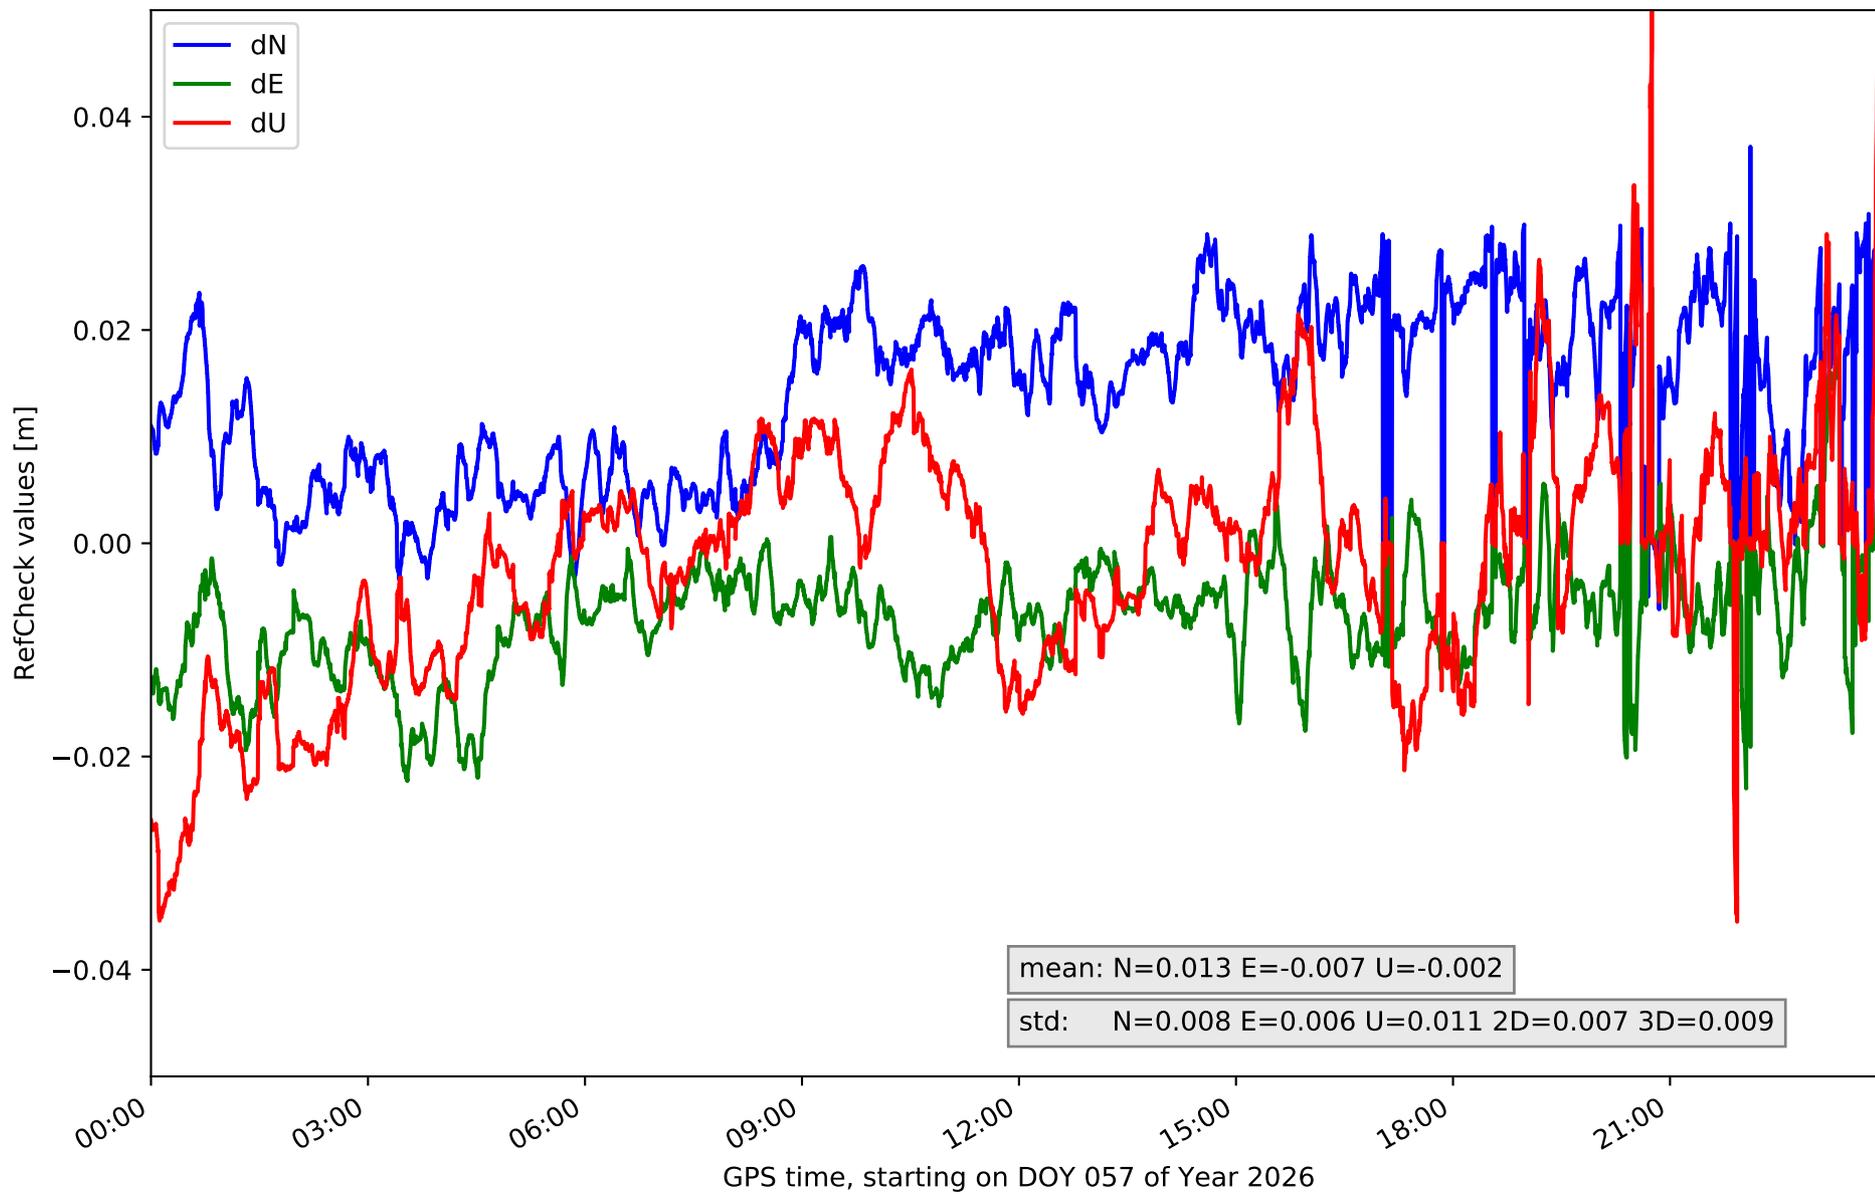

RefCheck for station TE11 in network NT32

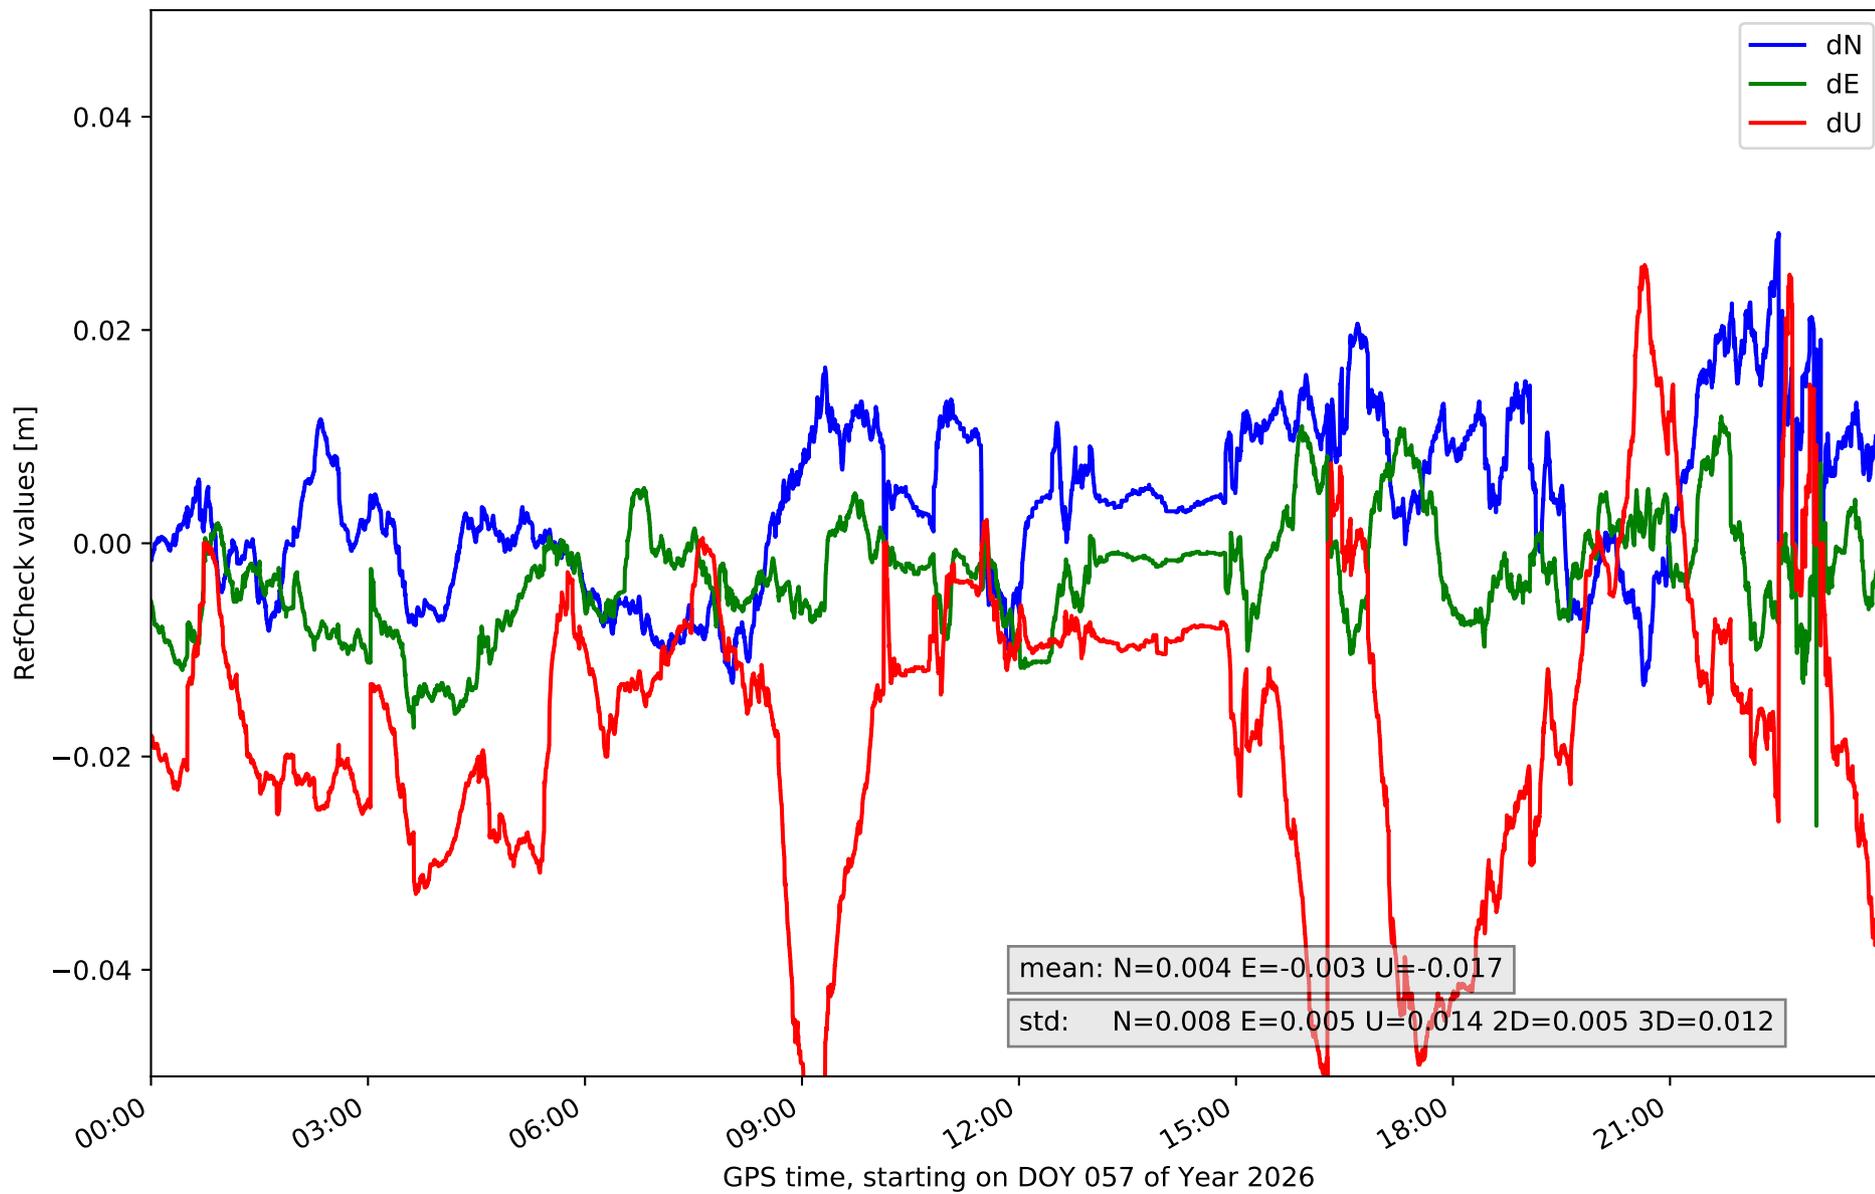

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.015	0.03	0.008	-0.0	0.029	0.005	-0.03	0.049	0.015	0.005	0.008	68981	95.1	46749	64.4
EH02	-0.011	0.03	0.008	-0.015	0.036	0.007	-0.065	0.058	0.026	0.008	0.016	62709	86.4	60020	82.7
GOM1	-0.029	0.027	0.009	-0.03	0.017	0.008	-0.05	0.052	0.02	0.005	0.011	64499	88.9	51220	70.6
GOME	-0.033	0.028	0.009	-0.037	0.019	0.006	-0.038	0.06	0.018	0.005	0.01	33039	45.5	29221	40.3
IZAN	-0.056	0.032	0.011	-0.037	0.038	0.007	-0.052	0.068	0.017	0.011	0.016	36730	50.6	31182	43.0
LP01	-0.031	0.02	0.011	-0.021	0.03	0.009	-0.035	0.06	0.019	0.006	0.01	64292	88.6	57340	79.0
LP03	-0.047	0.03	0.008	-0.016	0.03	0.009	-0.029	0.042	0.015	0.007	0.009	46411	64.0	33411	46.0
LPAL	-0.025	0.009	0.008	-0.003	0.024	0.005	-0.028	0.029	0.011	0.006	0.006	55392	76.3	29372	40.5
LRES	-0.028	0.046	0.01	-0.008	0.042	0.008	-0.07	0.04	0.017	0.009	0.014	55384	76.3	52330	72.1
TN01	-0.074	0.053	0.011	-0.049	0.036	0.01	-0.068	0.062	0.023	0.009	0.016	47433	65.4	46263	63.8
TN02	-0.02	0.026	0.009	-0.028	0.012	0.006	-0.06	0.054	0.016	0.006	0.009	41654	57.4	22678	31.3
TN03	-0.026	0.044	0.011	-0.027	0.017	0.006	-0.06	0.06	0.018	0.008	0.014	42144	58.1	41598	57.3
TN06	-0.022	0.033	0.008	-0.031	0.022	0.007	-0.062	0.045	0.021	0.005	0.015	34383	47.4	29664	40.9
TN09	-0.006	0.037	0.008	-0.023	0.024	0.006	-0.035	0.069	0.011	0.007	0.009	57056	78.6	39566	54.5
TE11	-0.013	0.029	0.008	-0.026	0.012	0.005	-0.052	0.026	0.014	0.005	0.012	30699	42.3	37006	51.0
Mean	-0.029	0.032	0.009	-0.023	0.026	0.007	-0.049	0.052	0.017	0.007	0.012	49387.1	68.1	40508.0	55.8
Min/Max	-0.074	0.053	0.011	-0.049	0.042	0.01	-0.07	0.069	0.026	0.011	0.016	68981	95.1	60020	82.7

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	84.7	86.4	83.6	86.3	81.7
considering satellites with dual-frequency fixed	72.5	74.9	67.5	75.3	69.8
considering all signals separately	73.4	75.3	67.5	76.9	69.0