

summary for network N32T

timeperiod chosen: from 2026-01-06-00:00:00 until 2026-01-06-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.2 seconds


average fixing percentage with threshold set to 0.3: 89.1 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: LEICA GR50	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

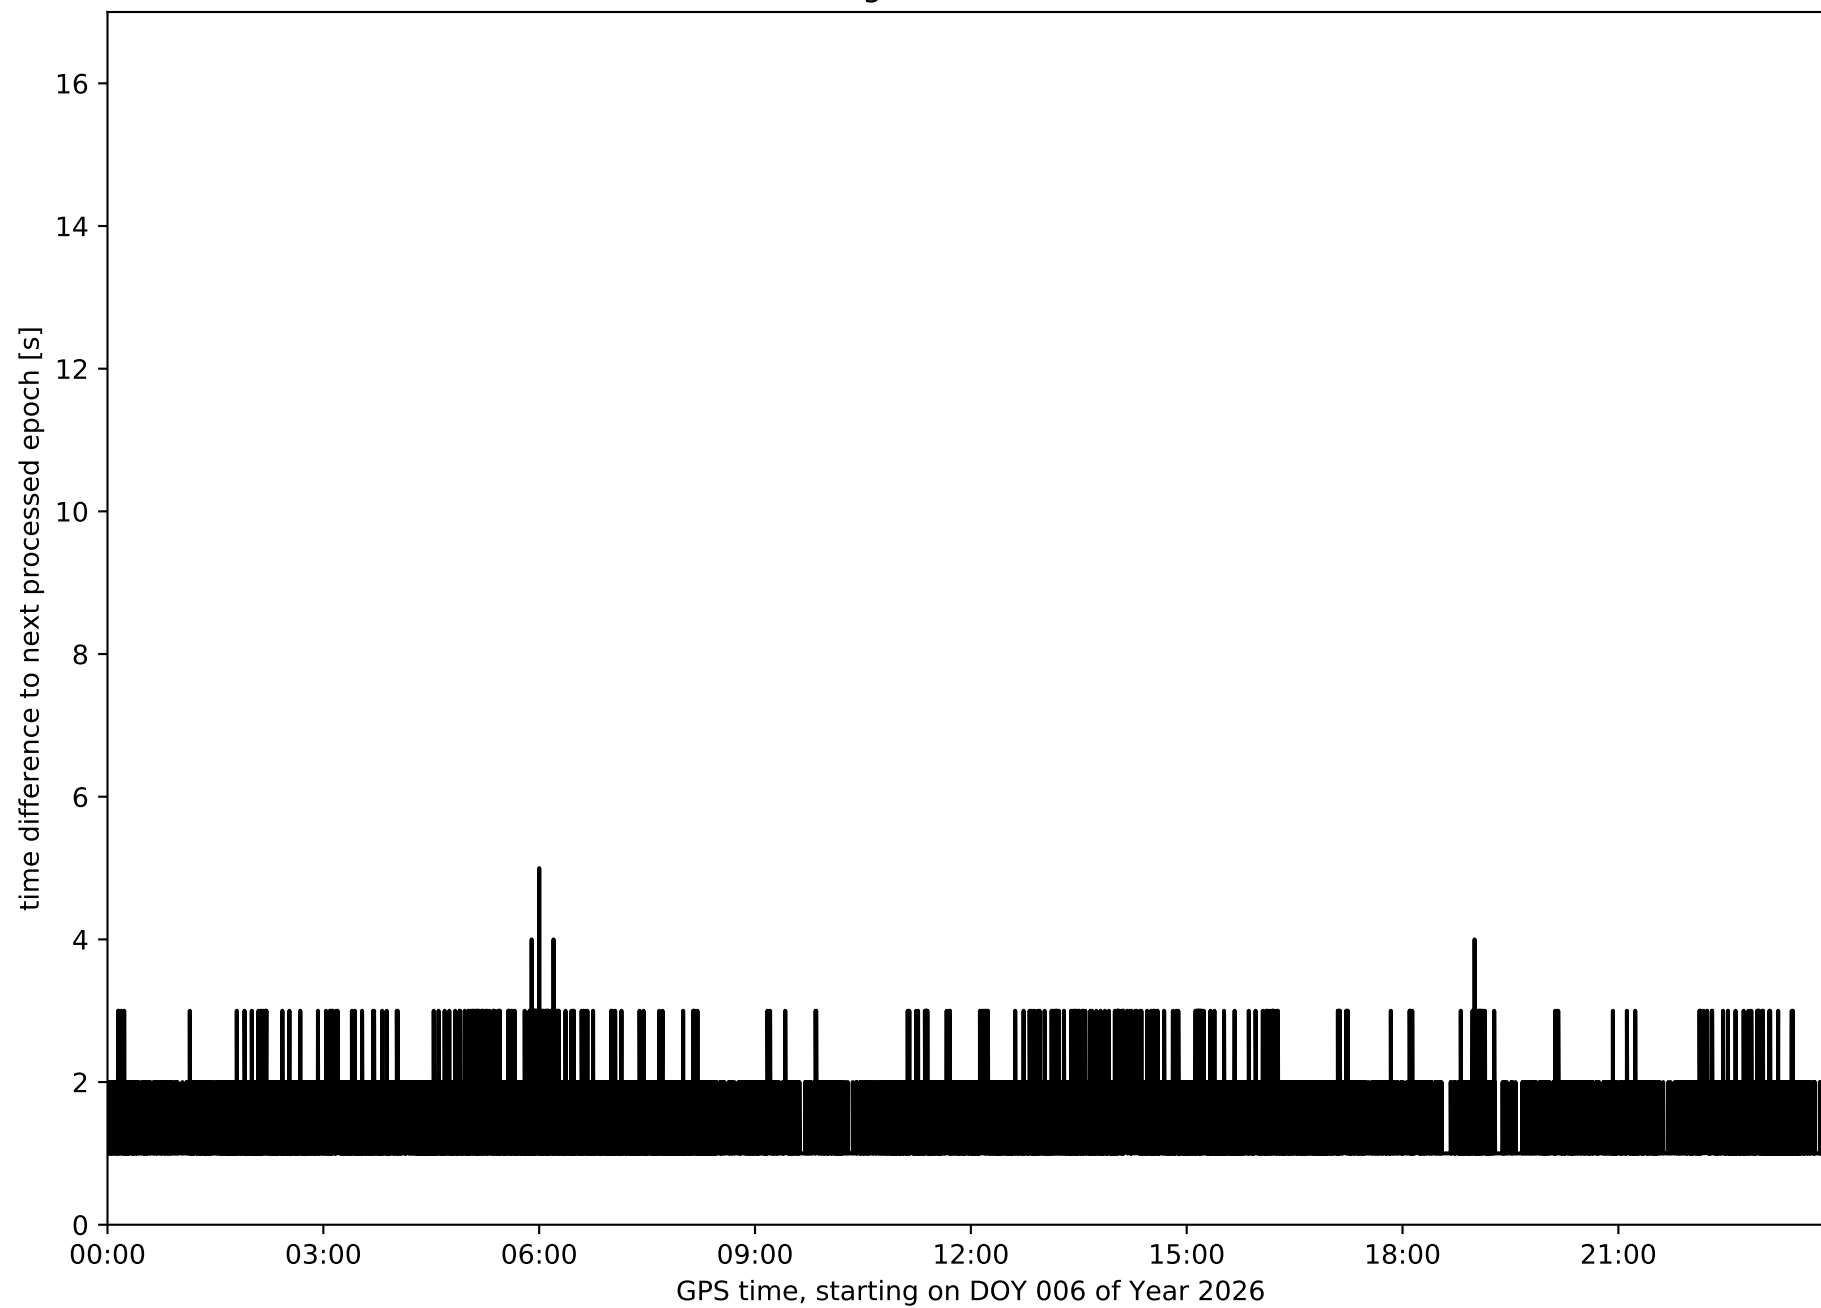


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

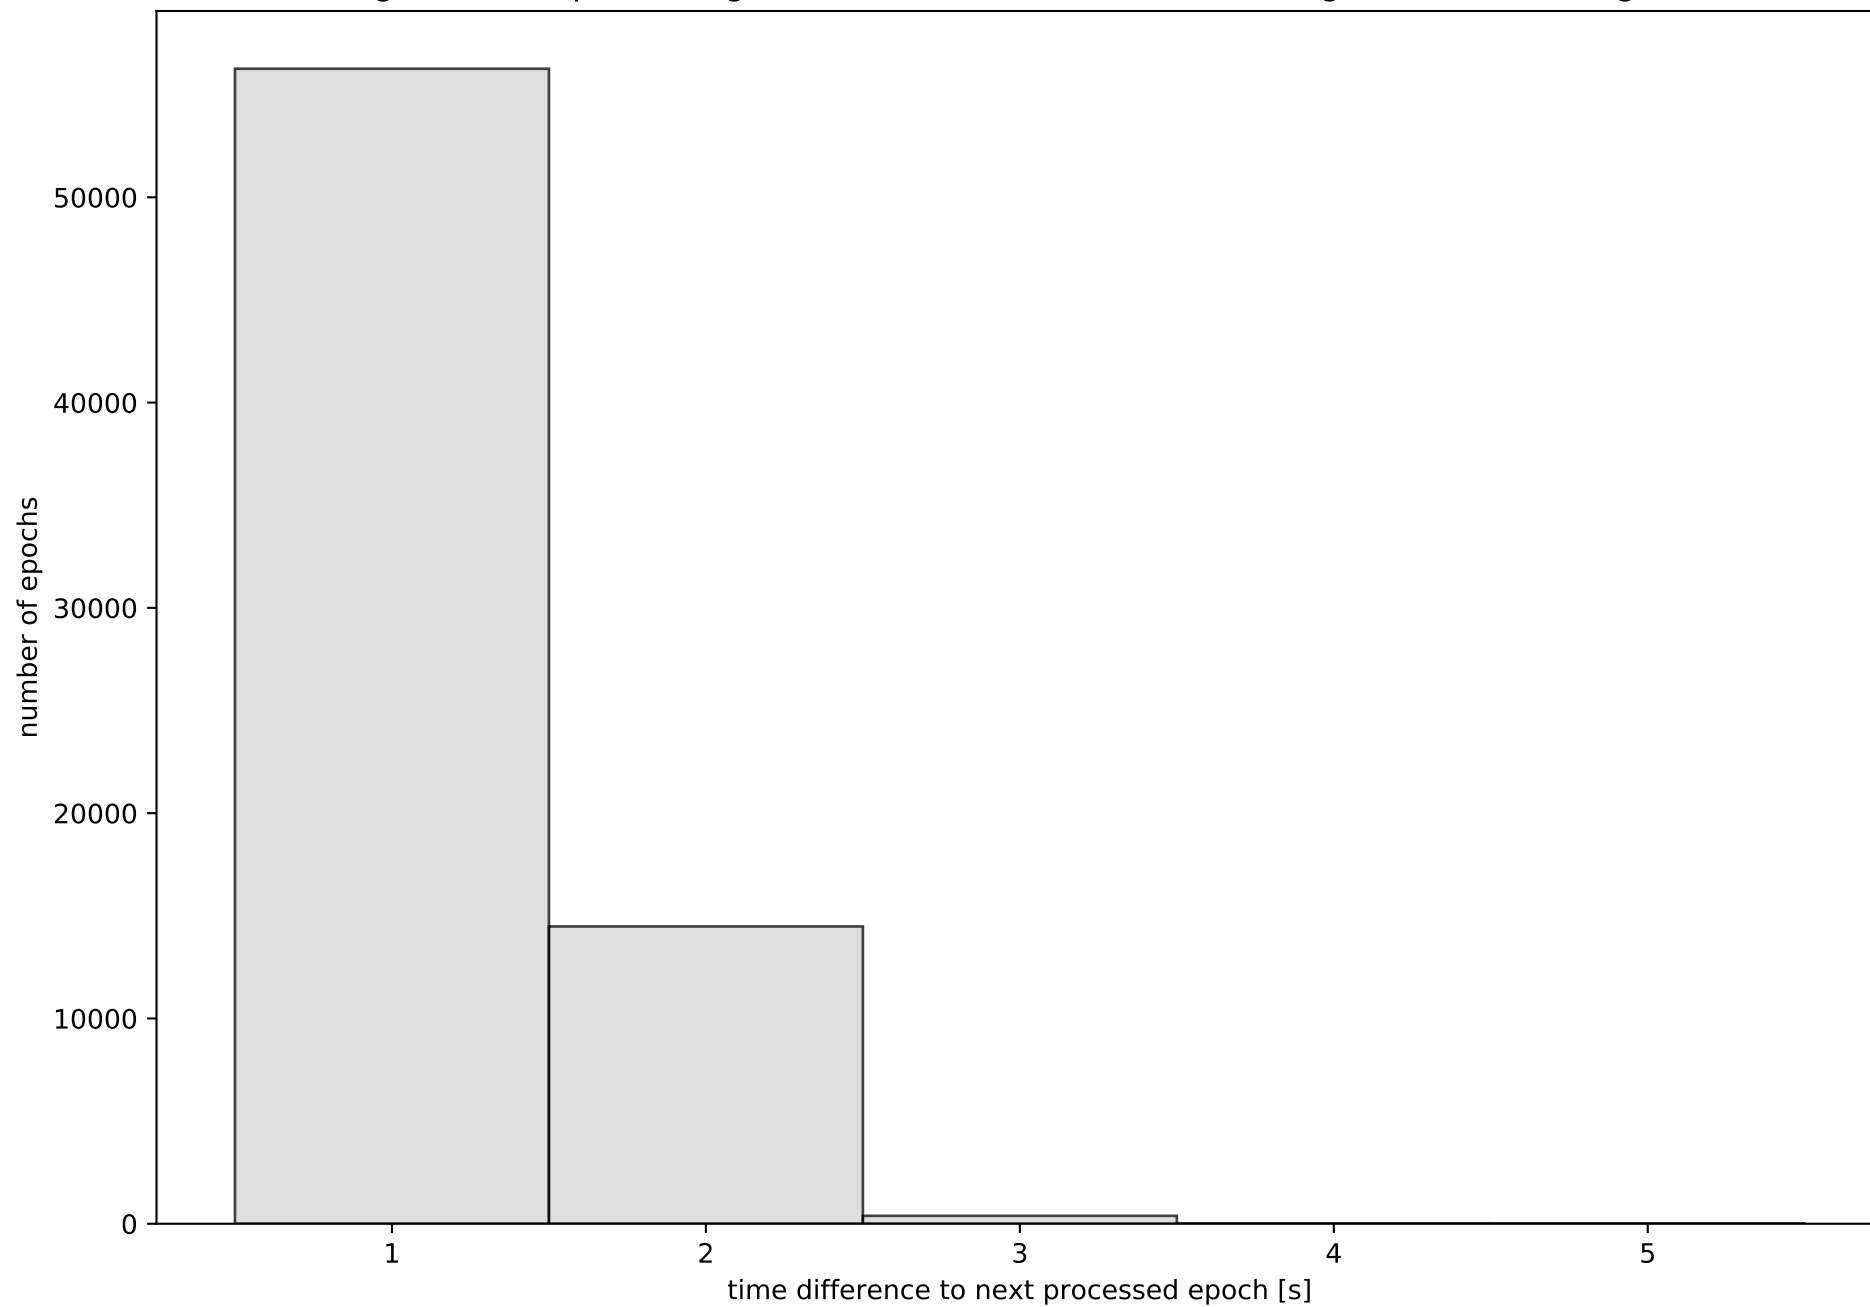


Network N32T with threshold set to 0.3

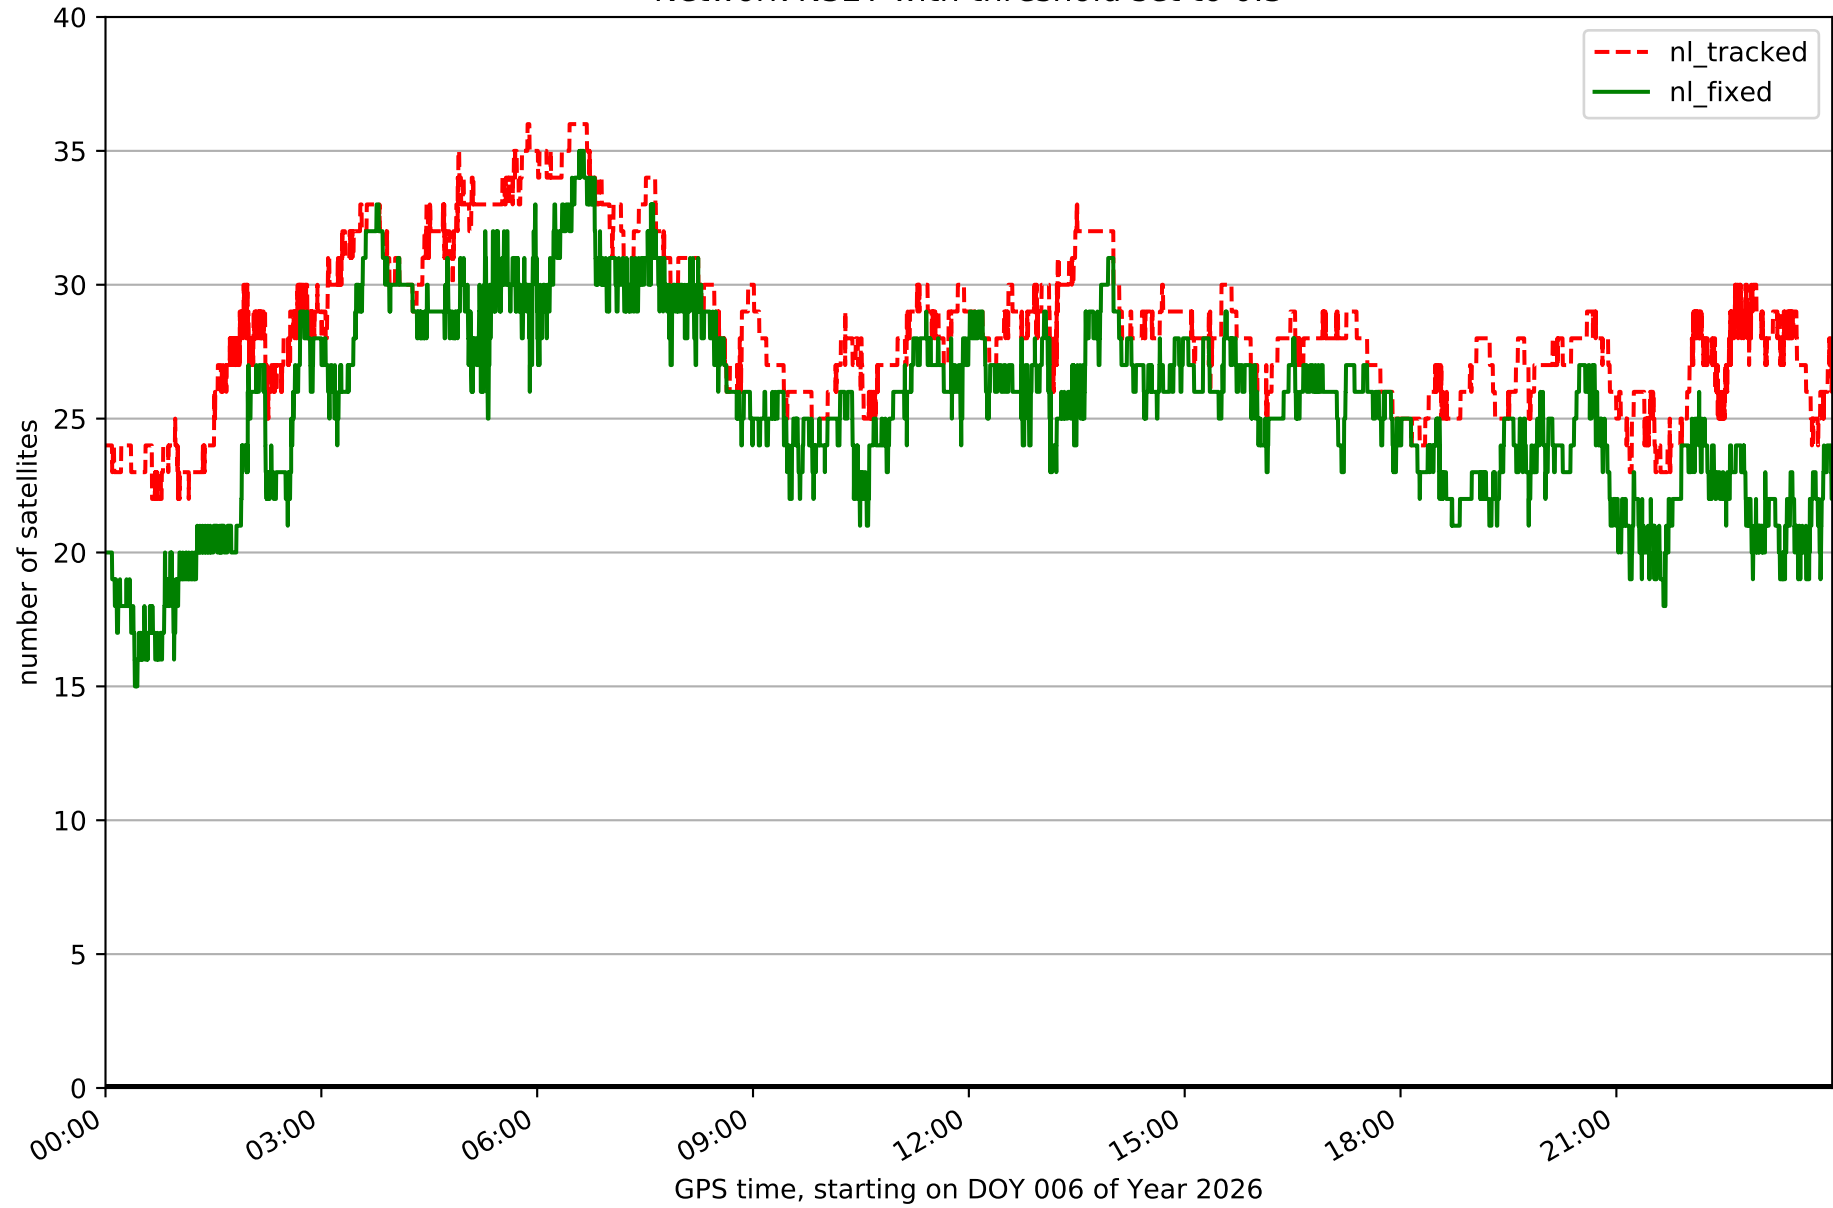


Fixing percentage of satellites in network N32T with threshold set to 0.3

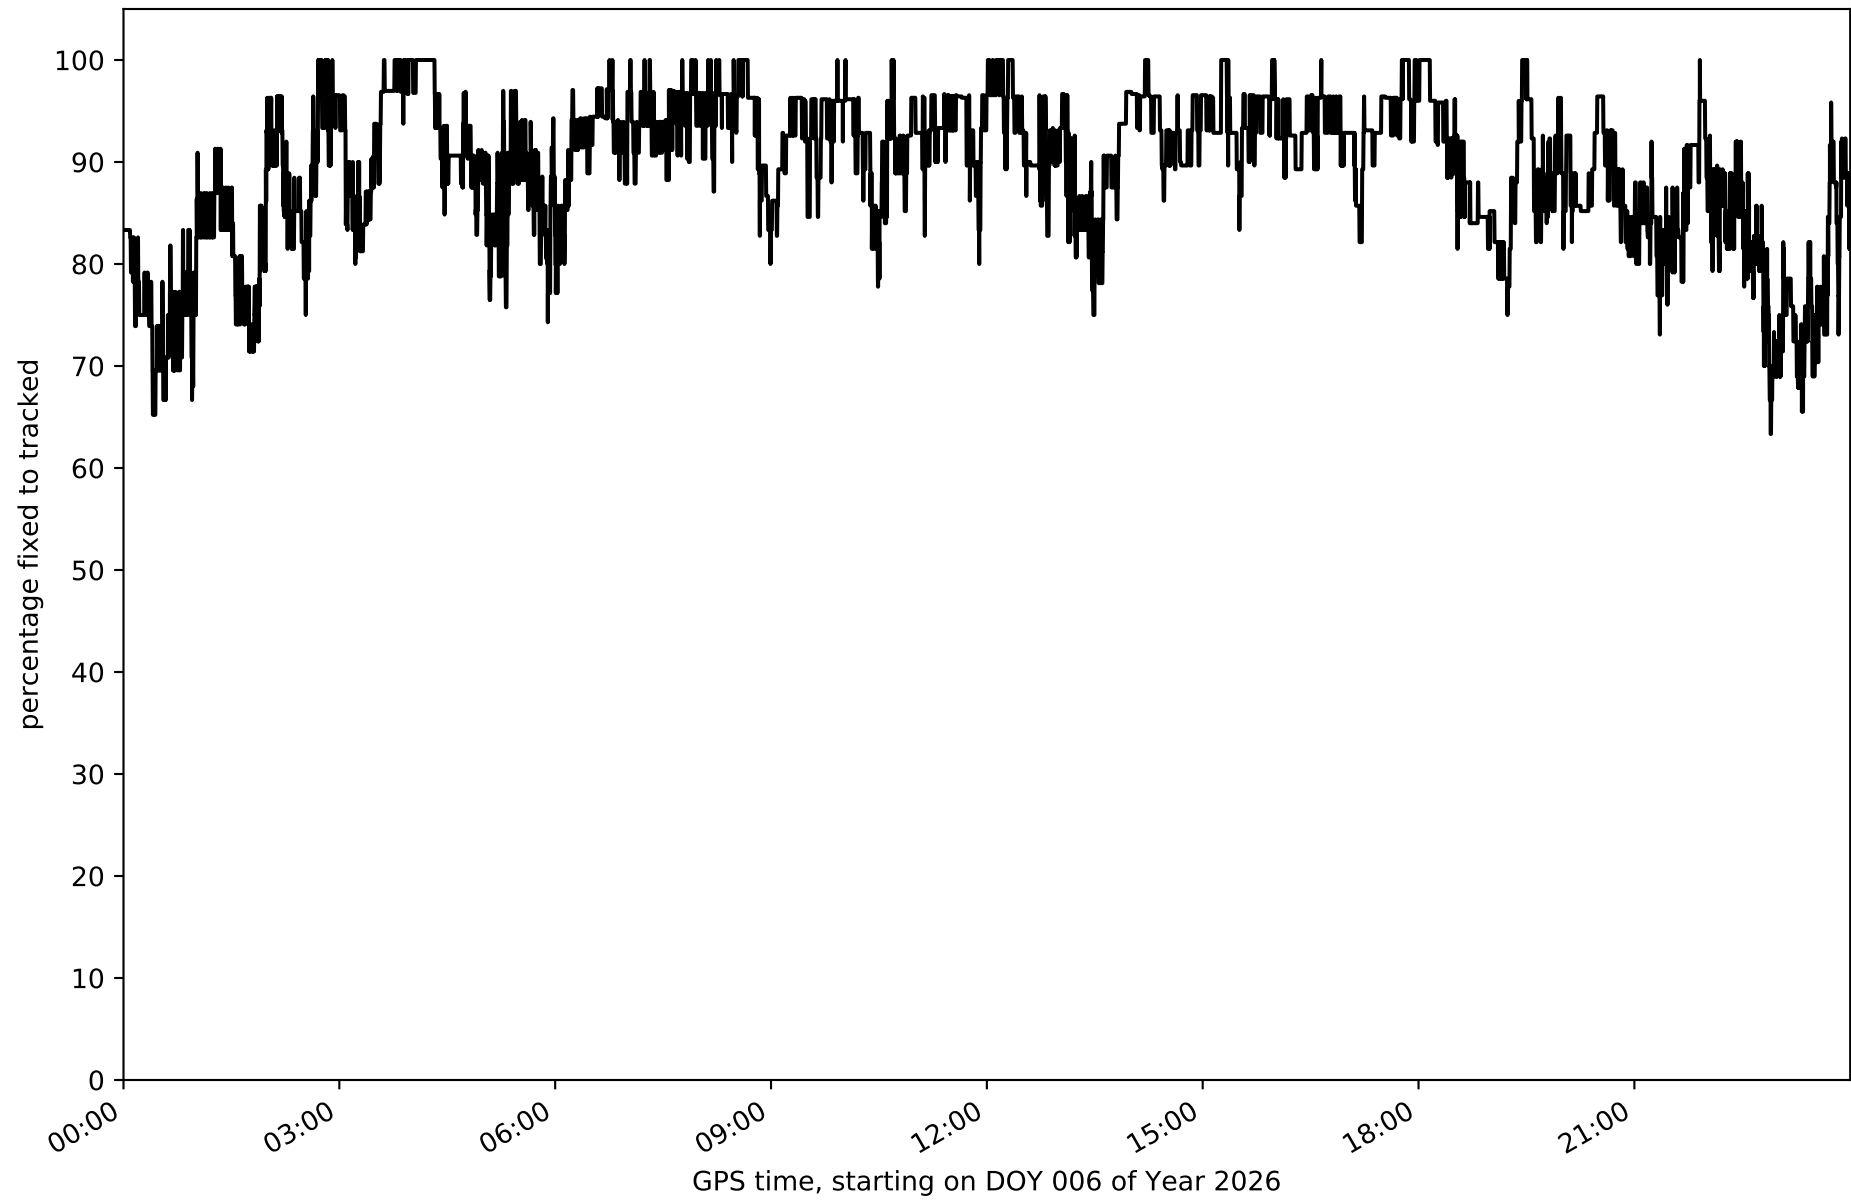


Network N32T - only GPS with threshold set to 0.3

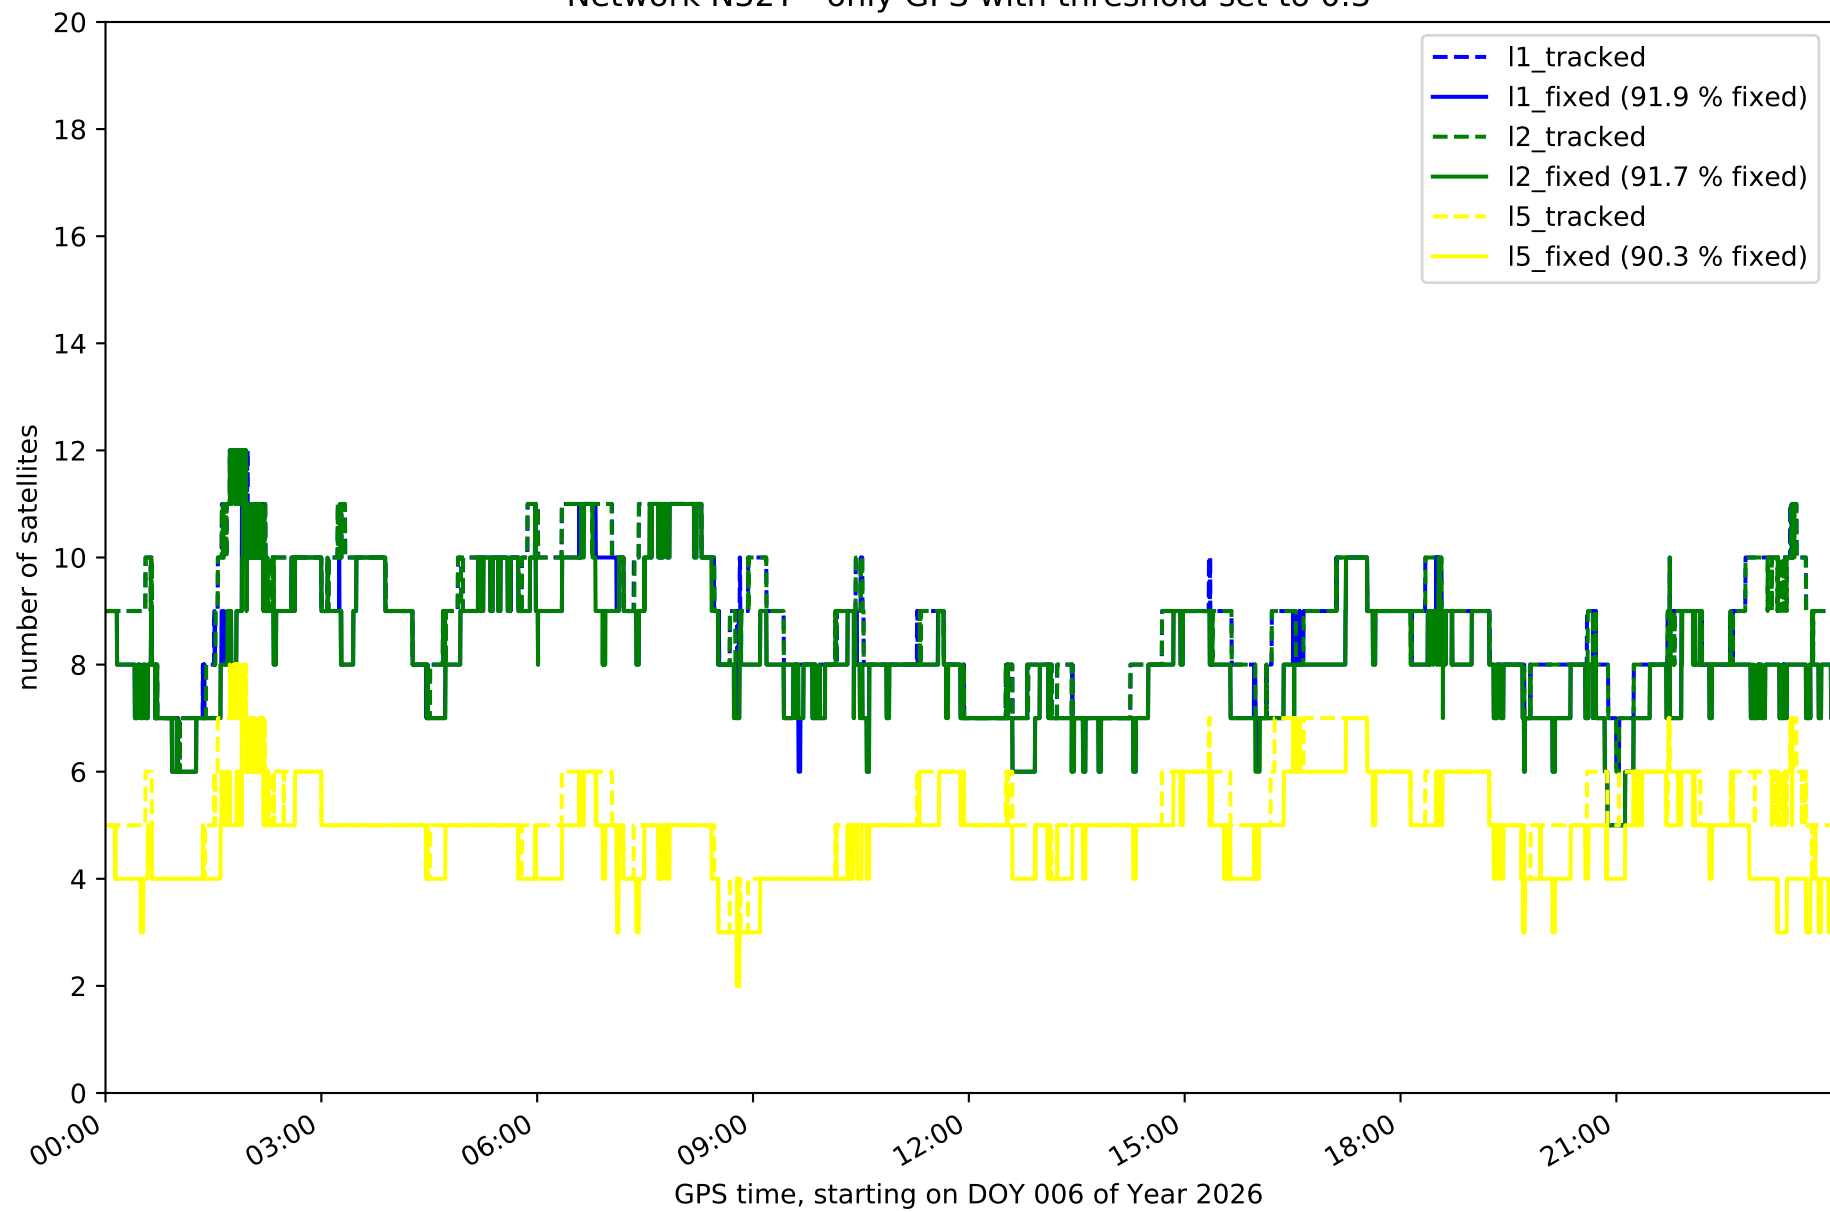


Network N32T - only GLONASS with threshold set to 0.3

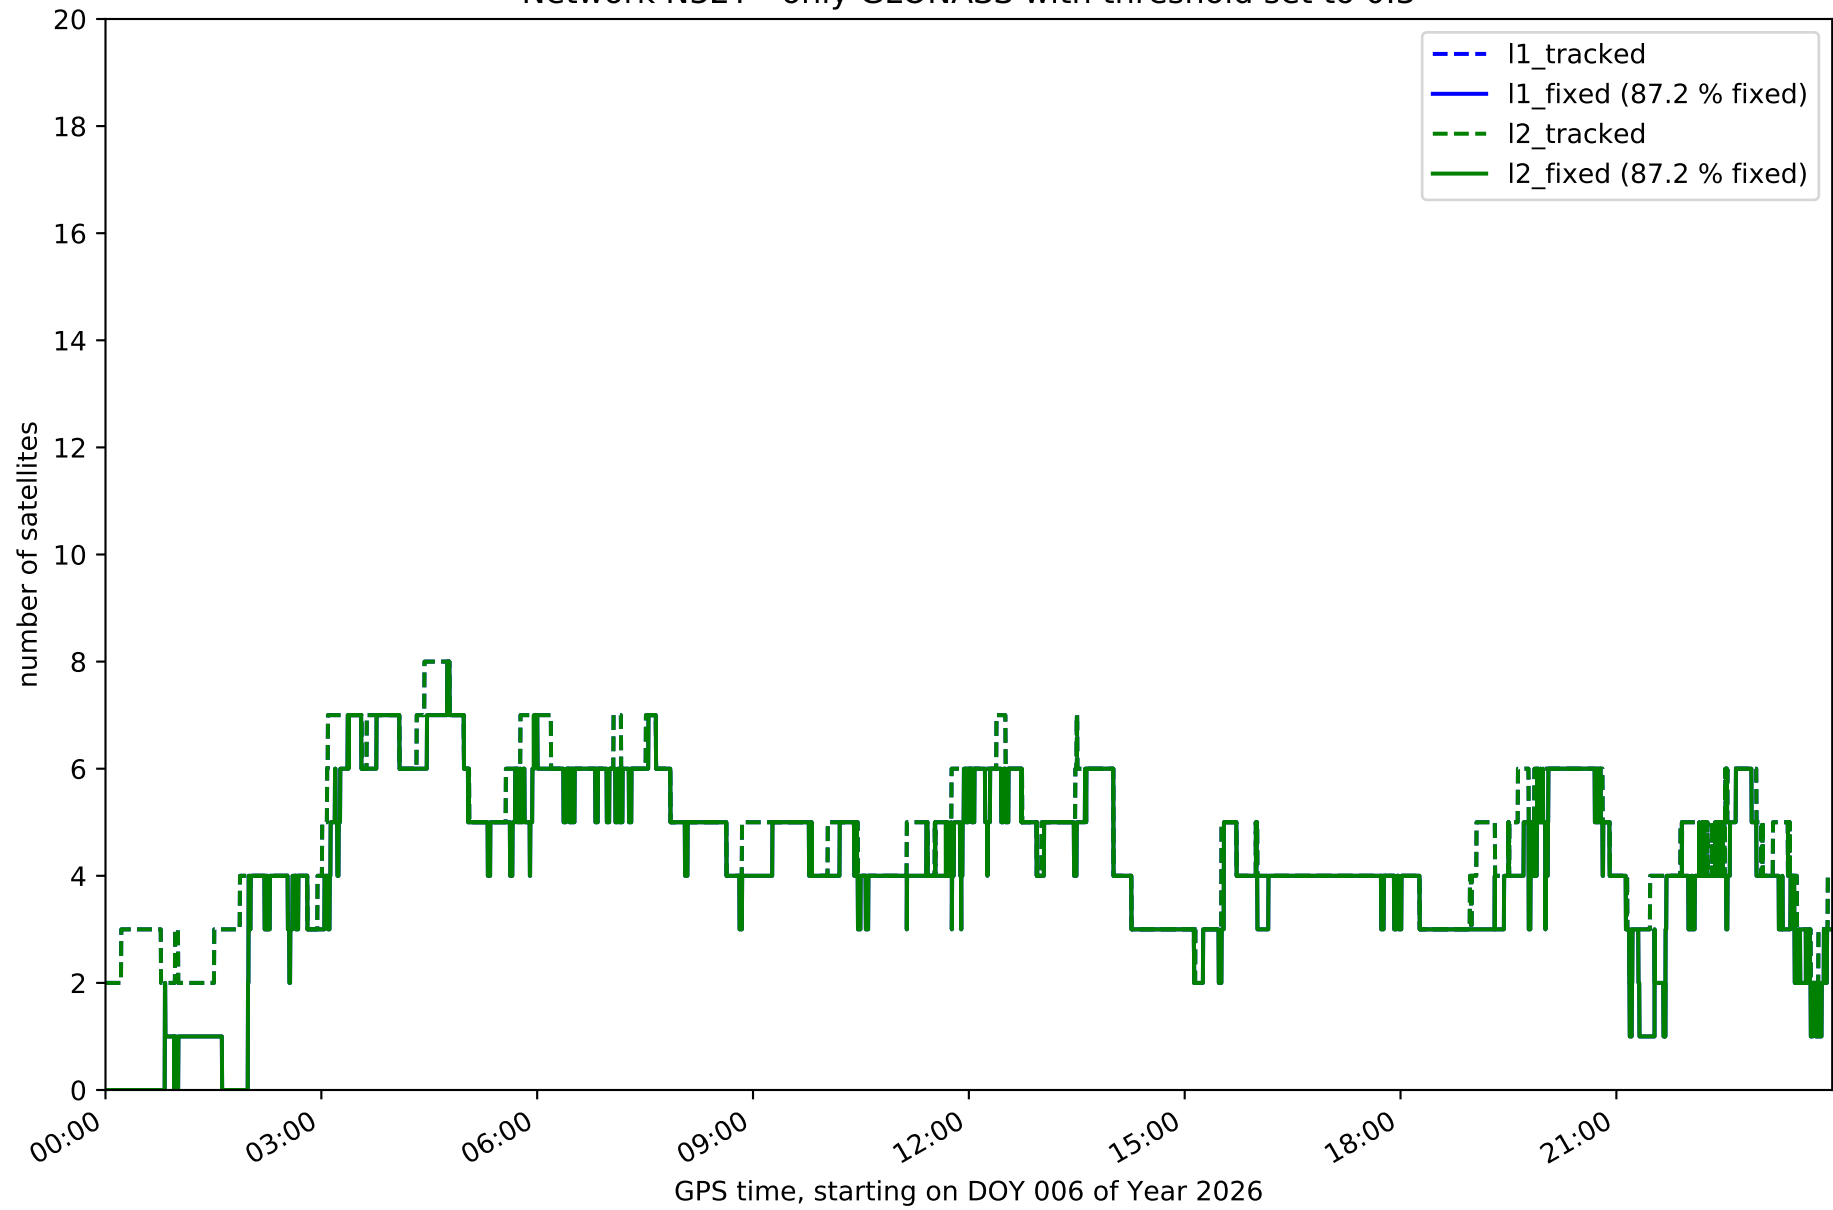


Network N32T - only BDS with threshold set to 0.3

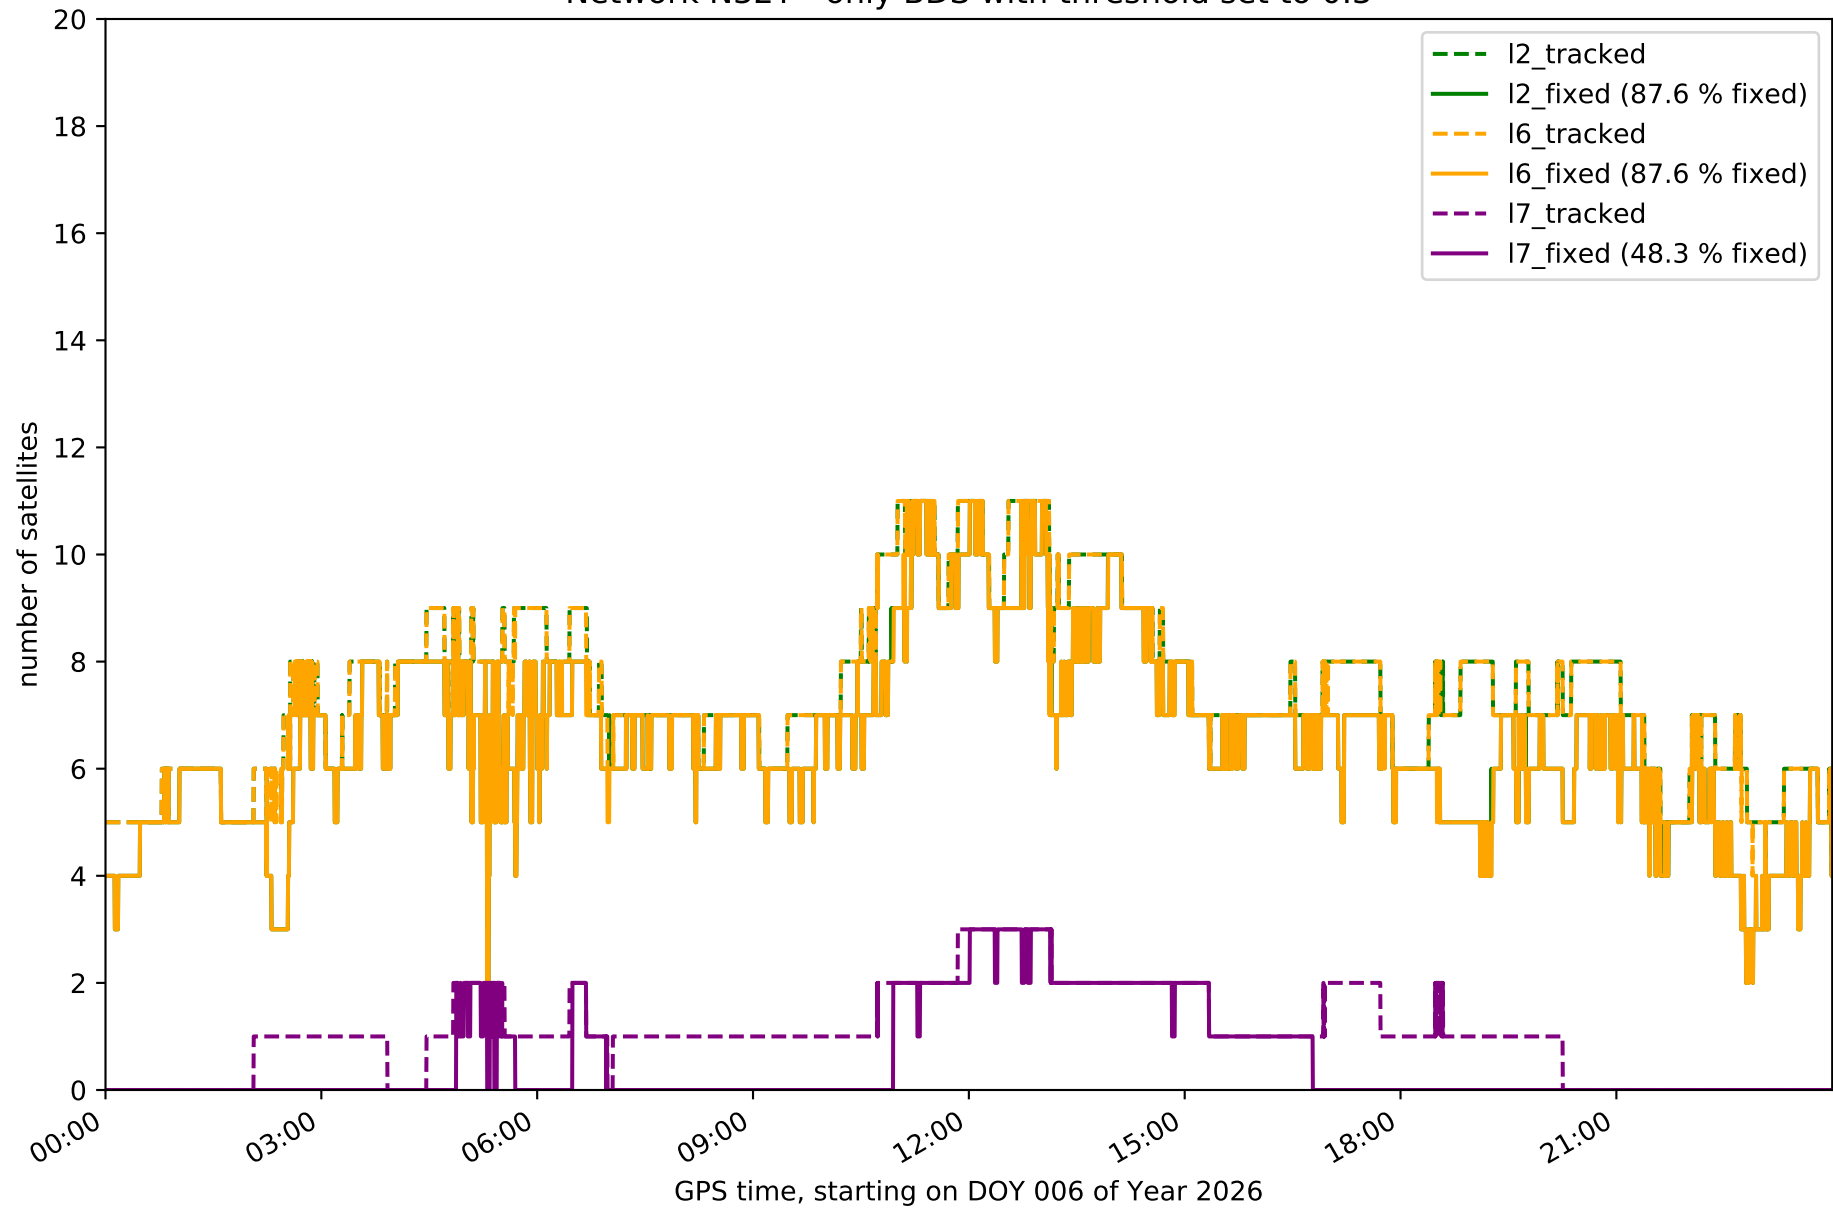


Network N32T - only Galileo with threshold set to 0.3

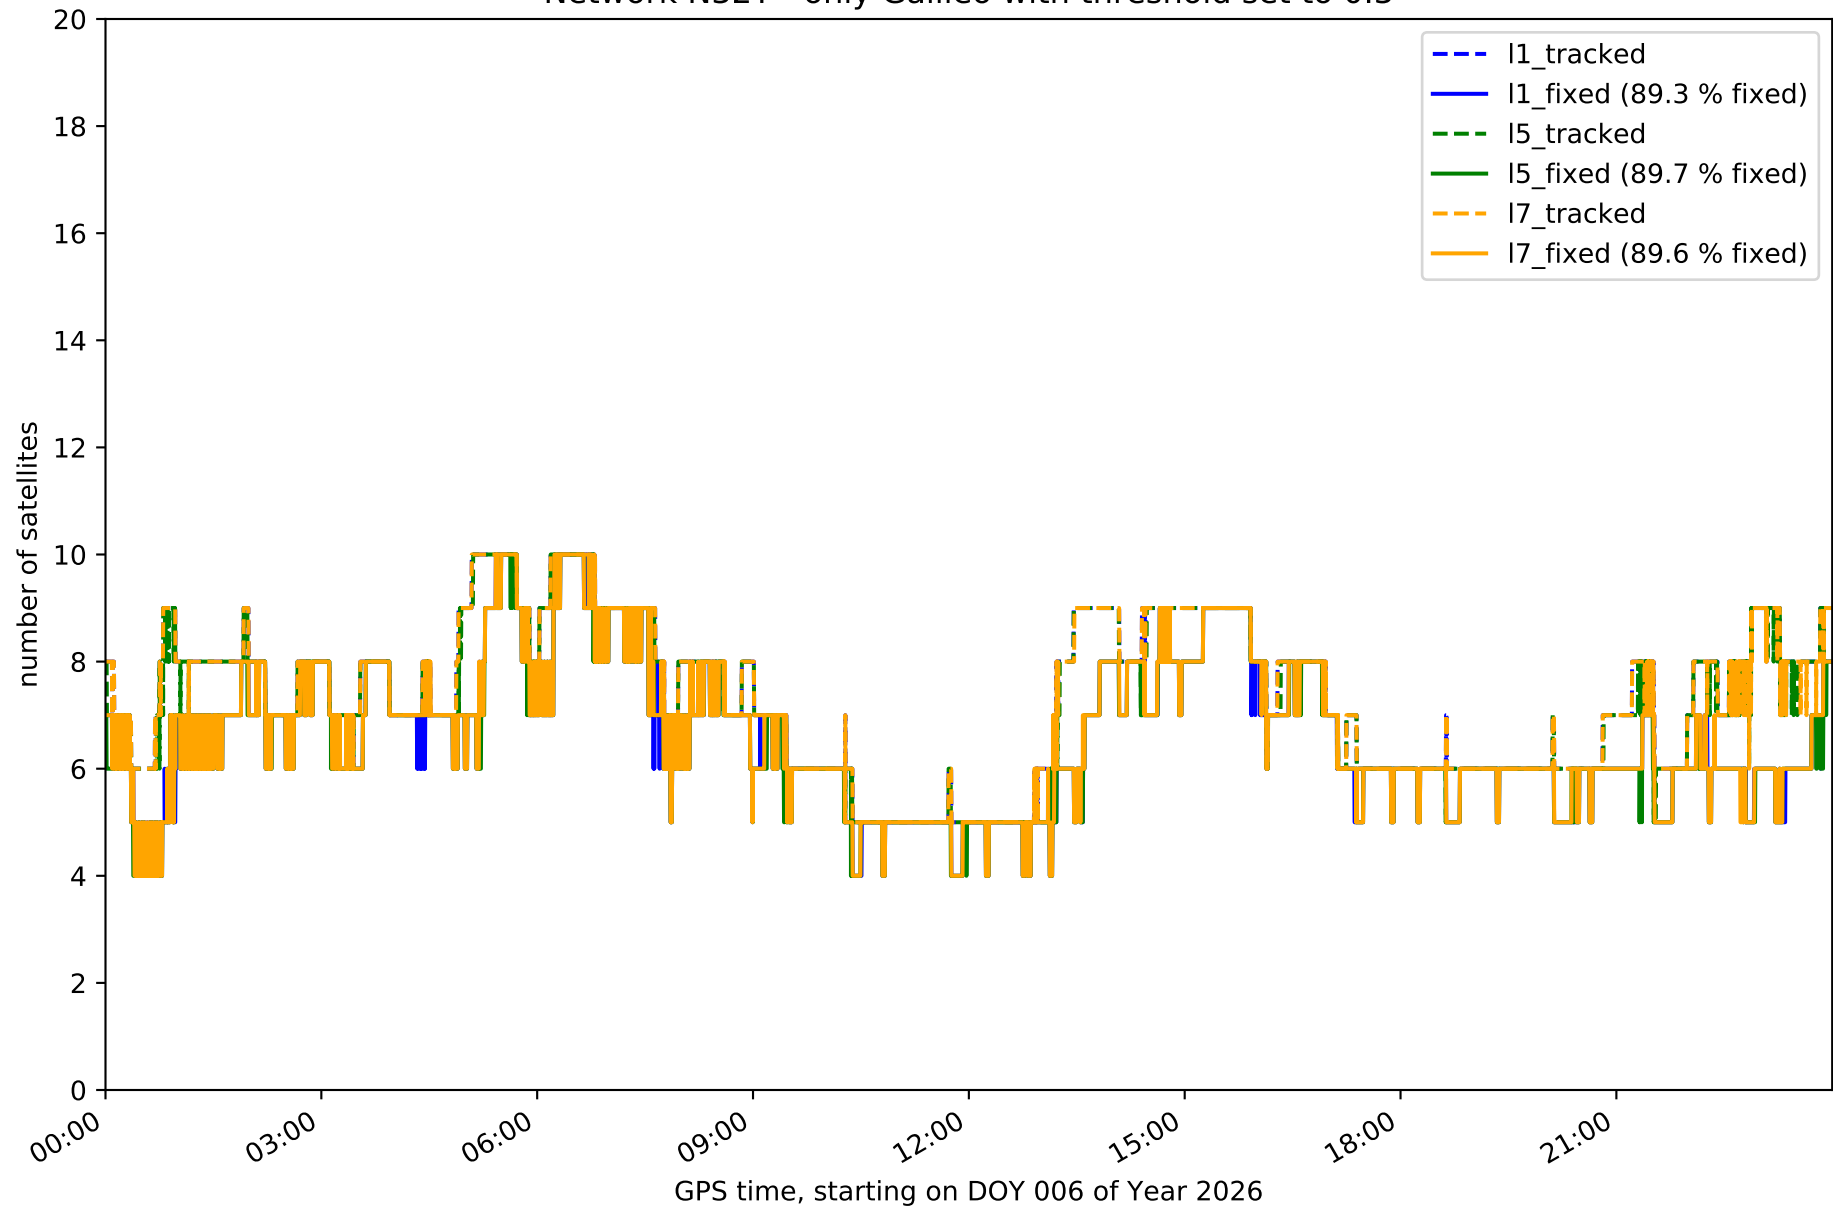


Station EH01 in network N32T

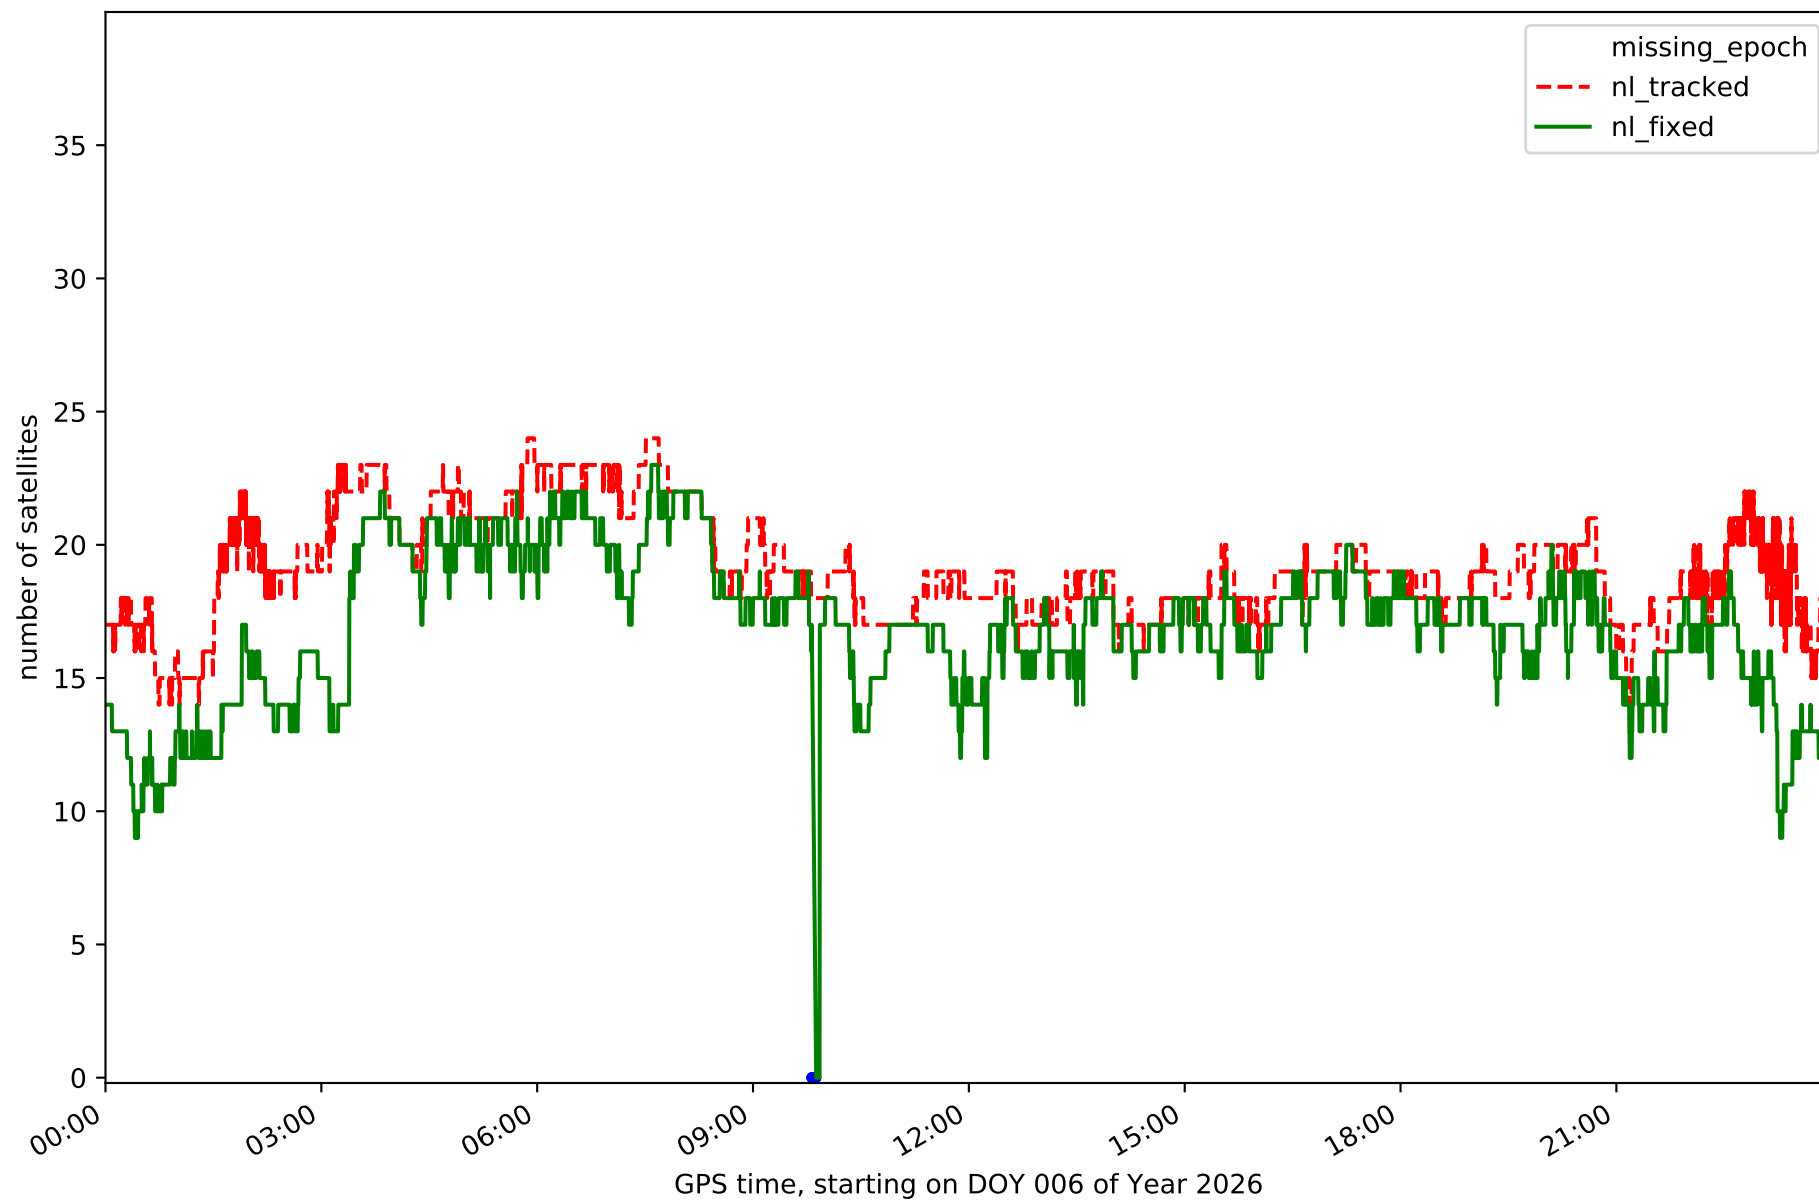


Station EH02 in network N32T

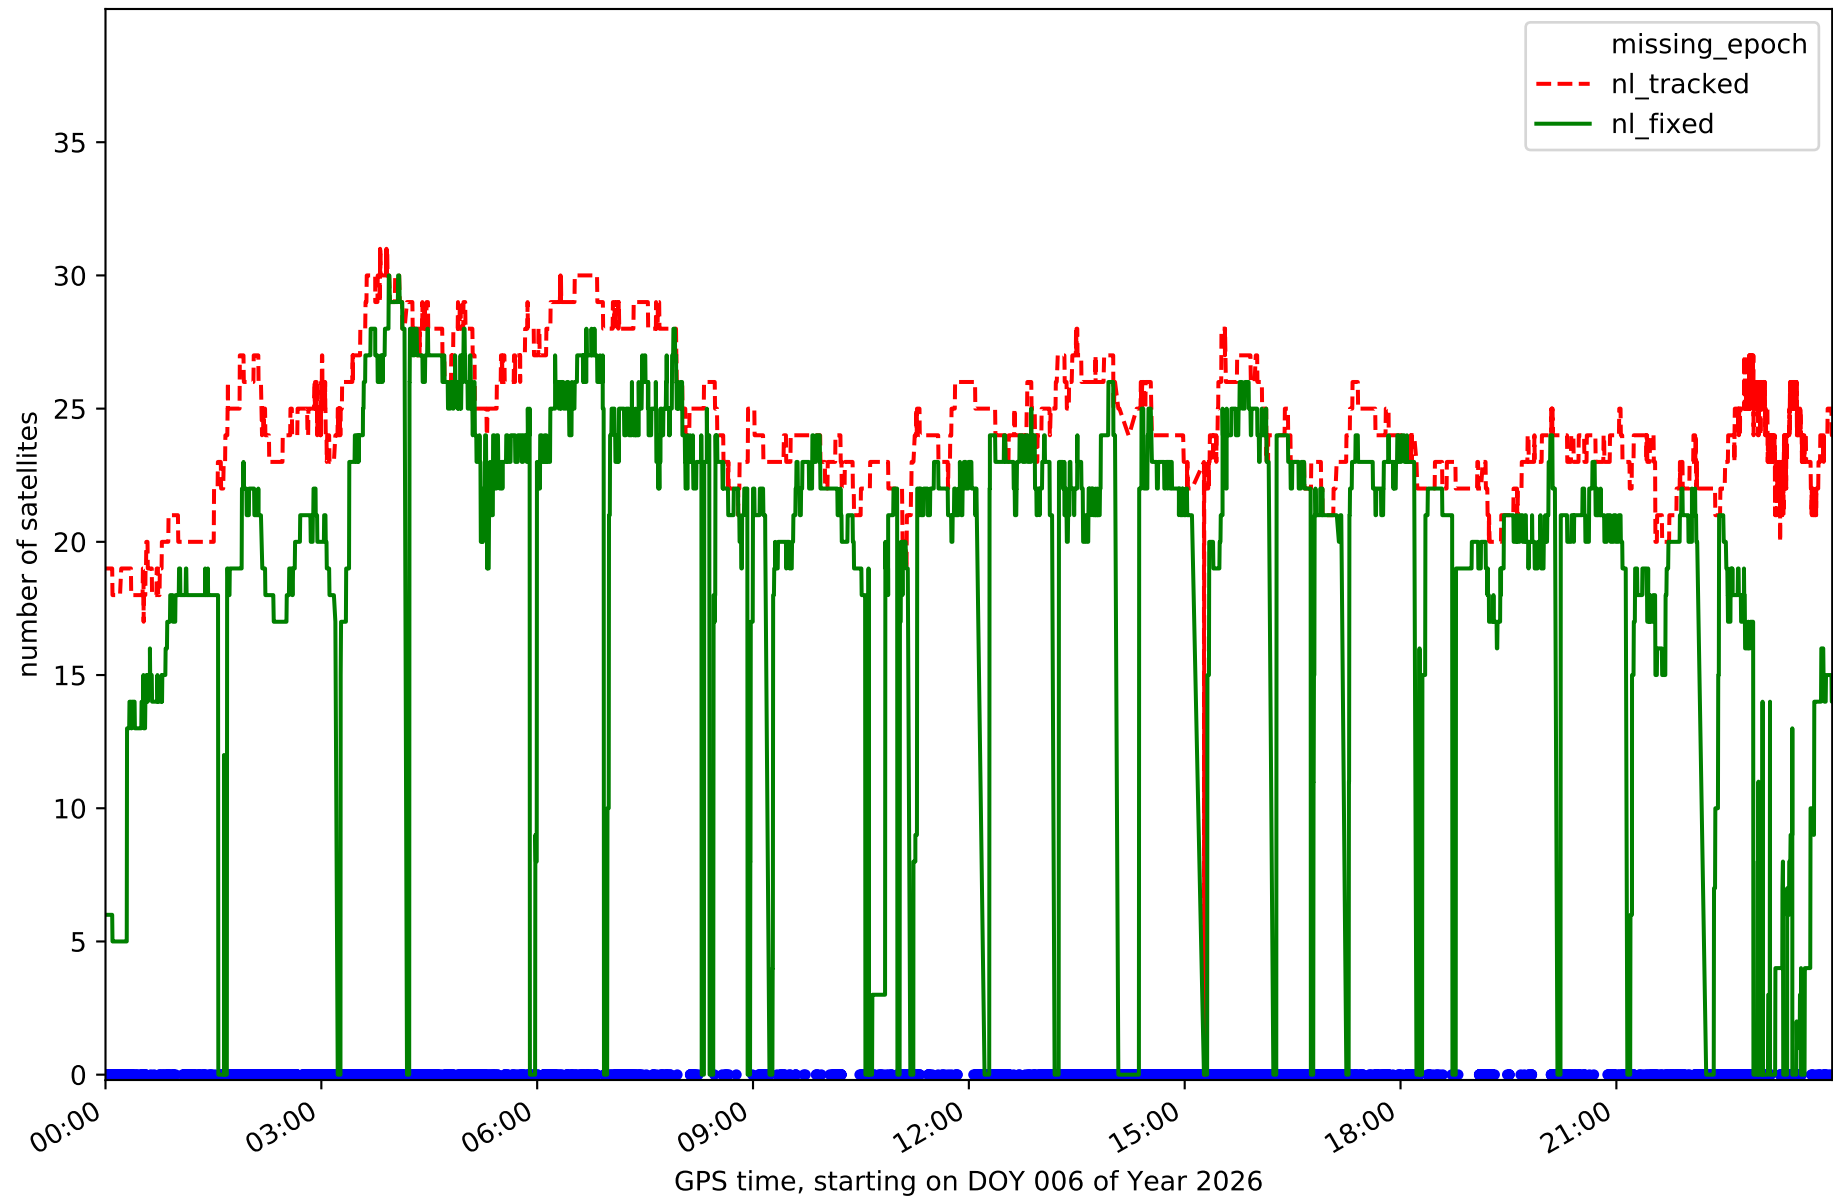


Station GOM1 in network N32T

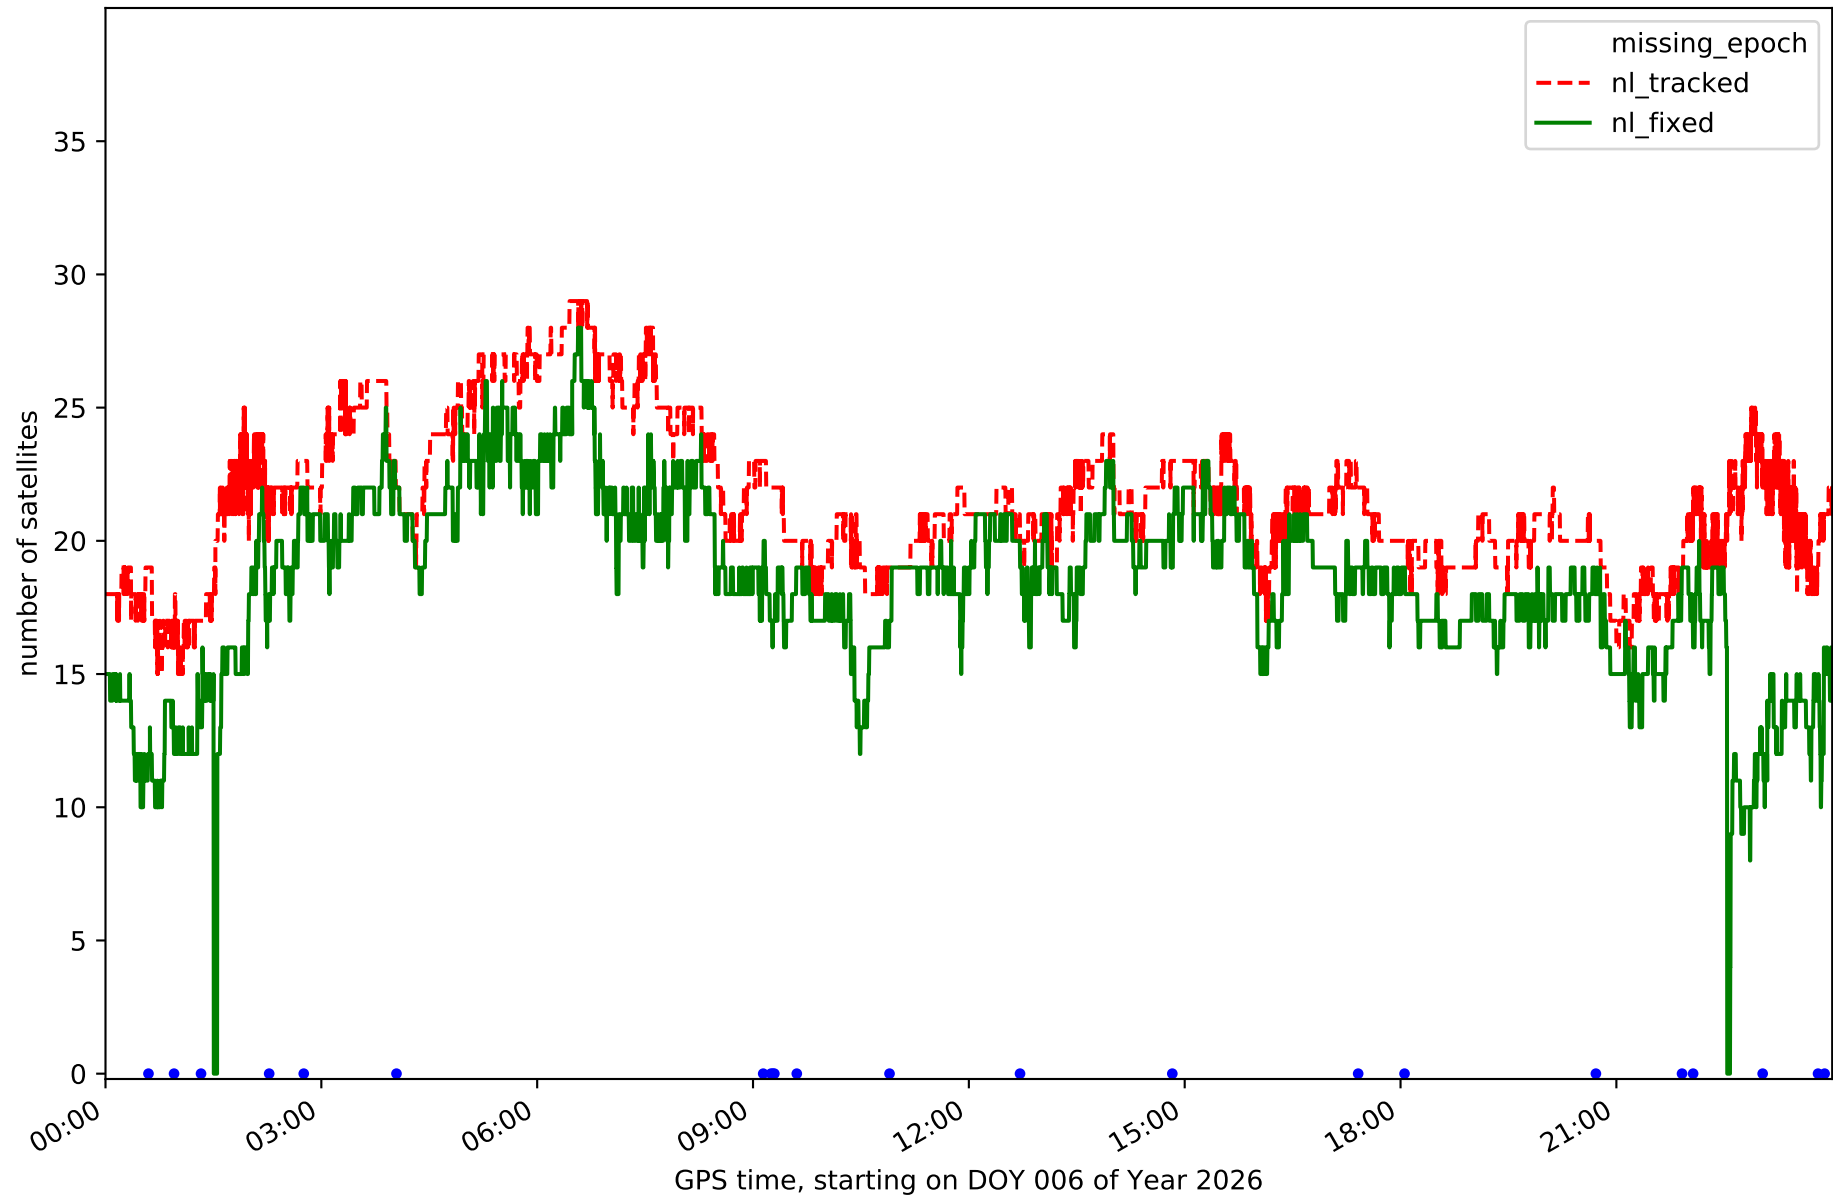


Station GOME in network N32T

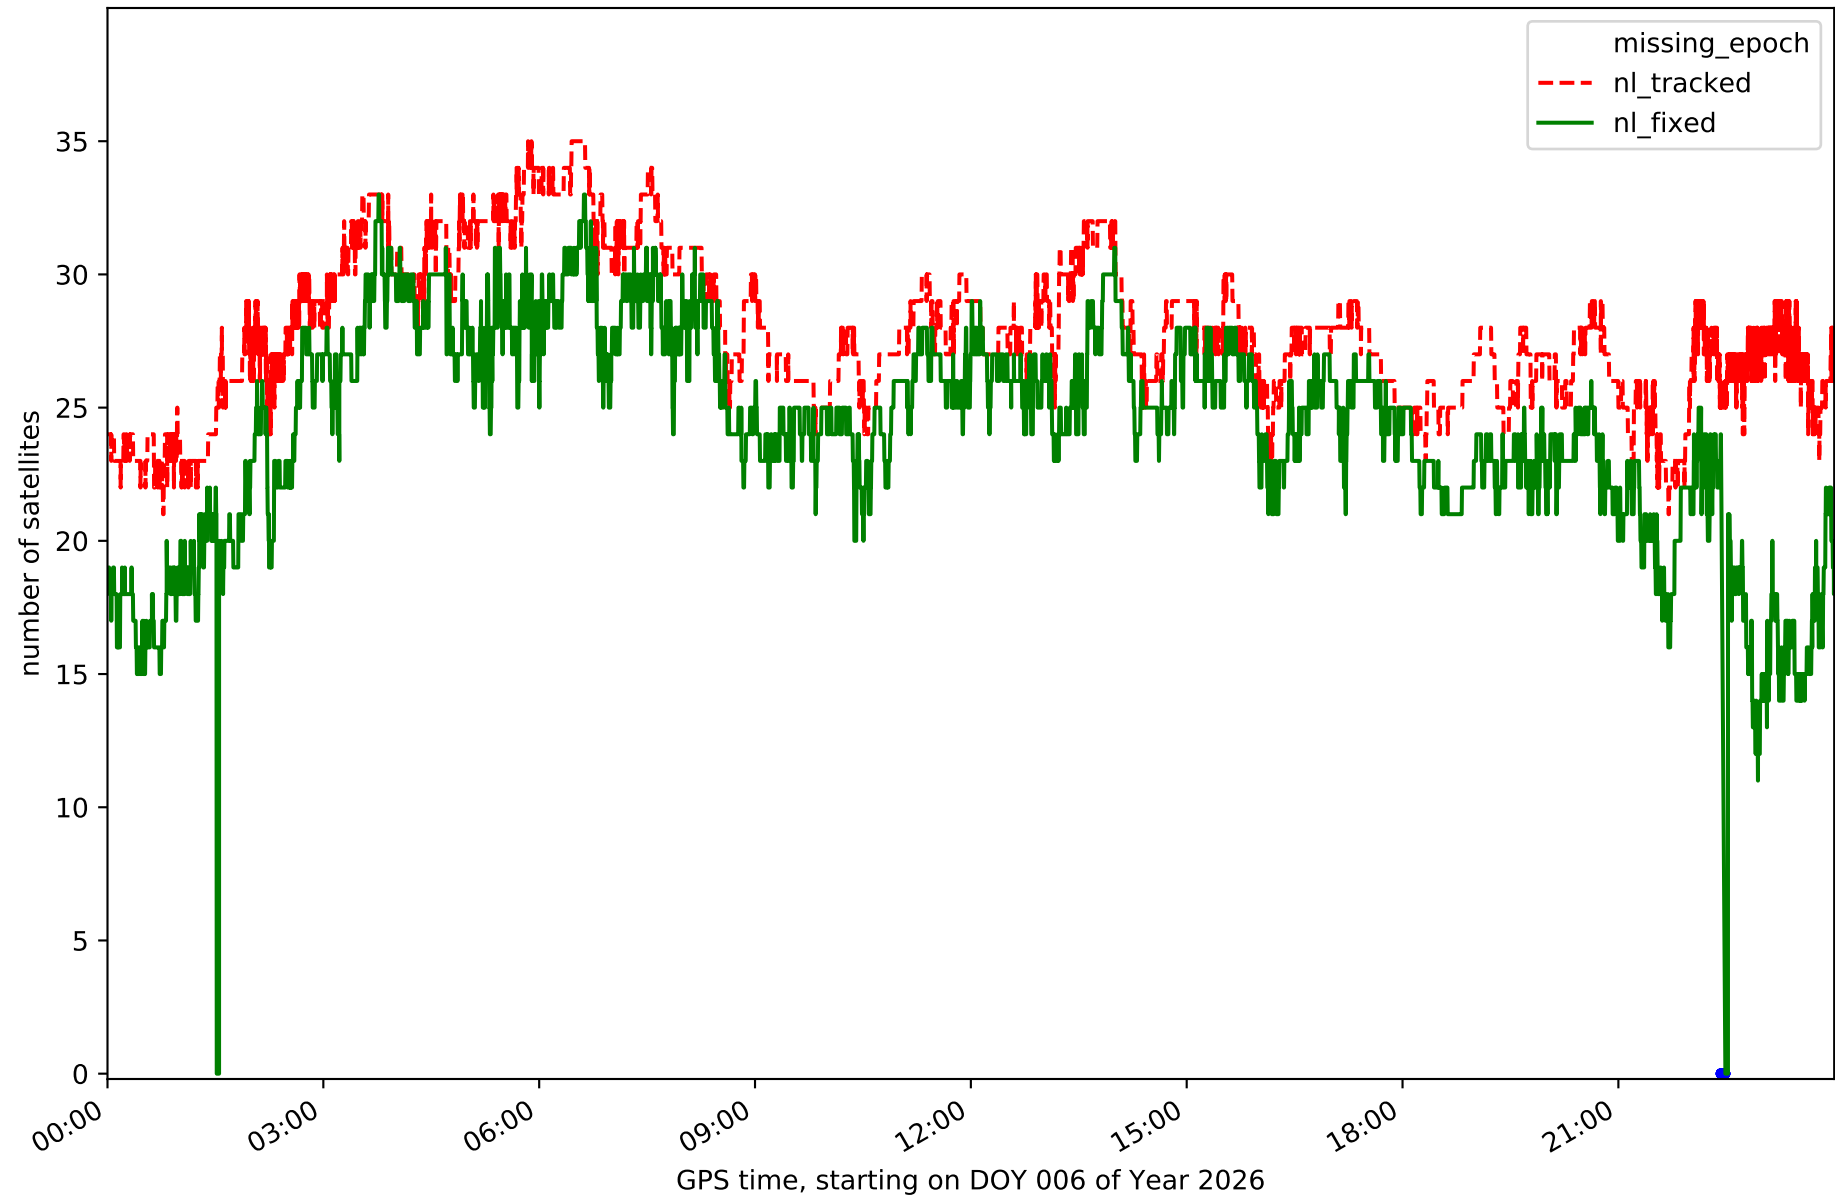


Station IZAN in network N32T

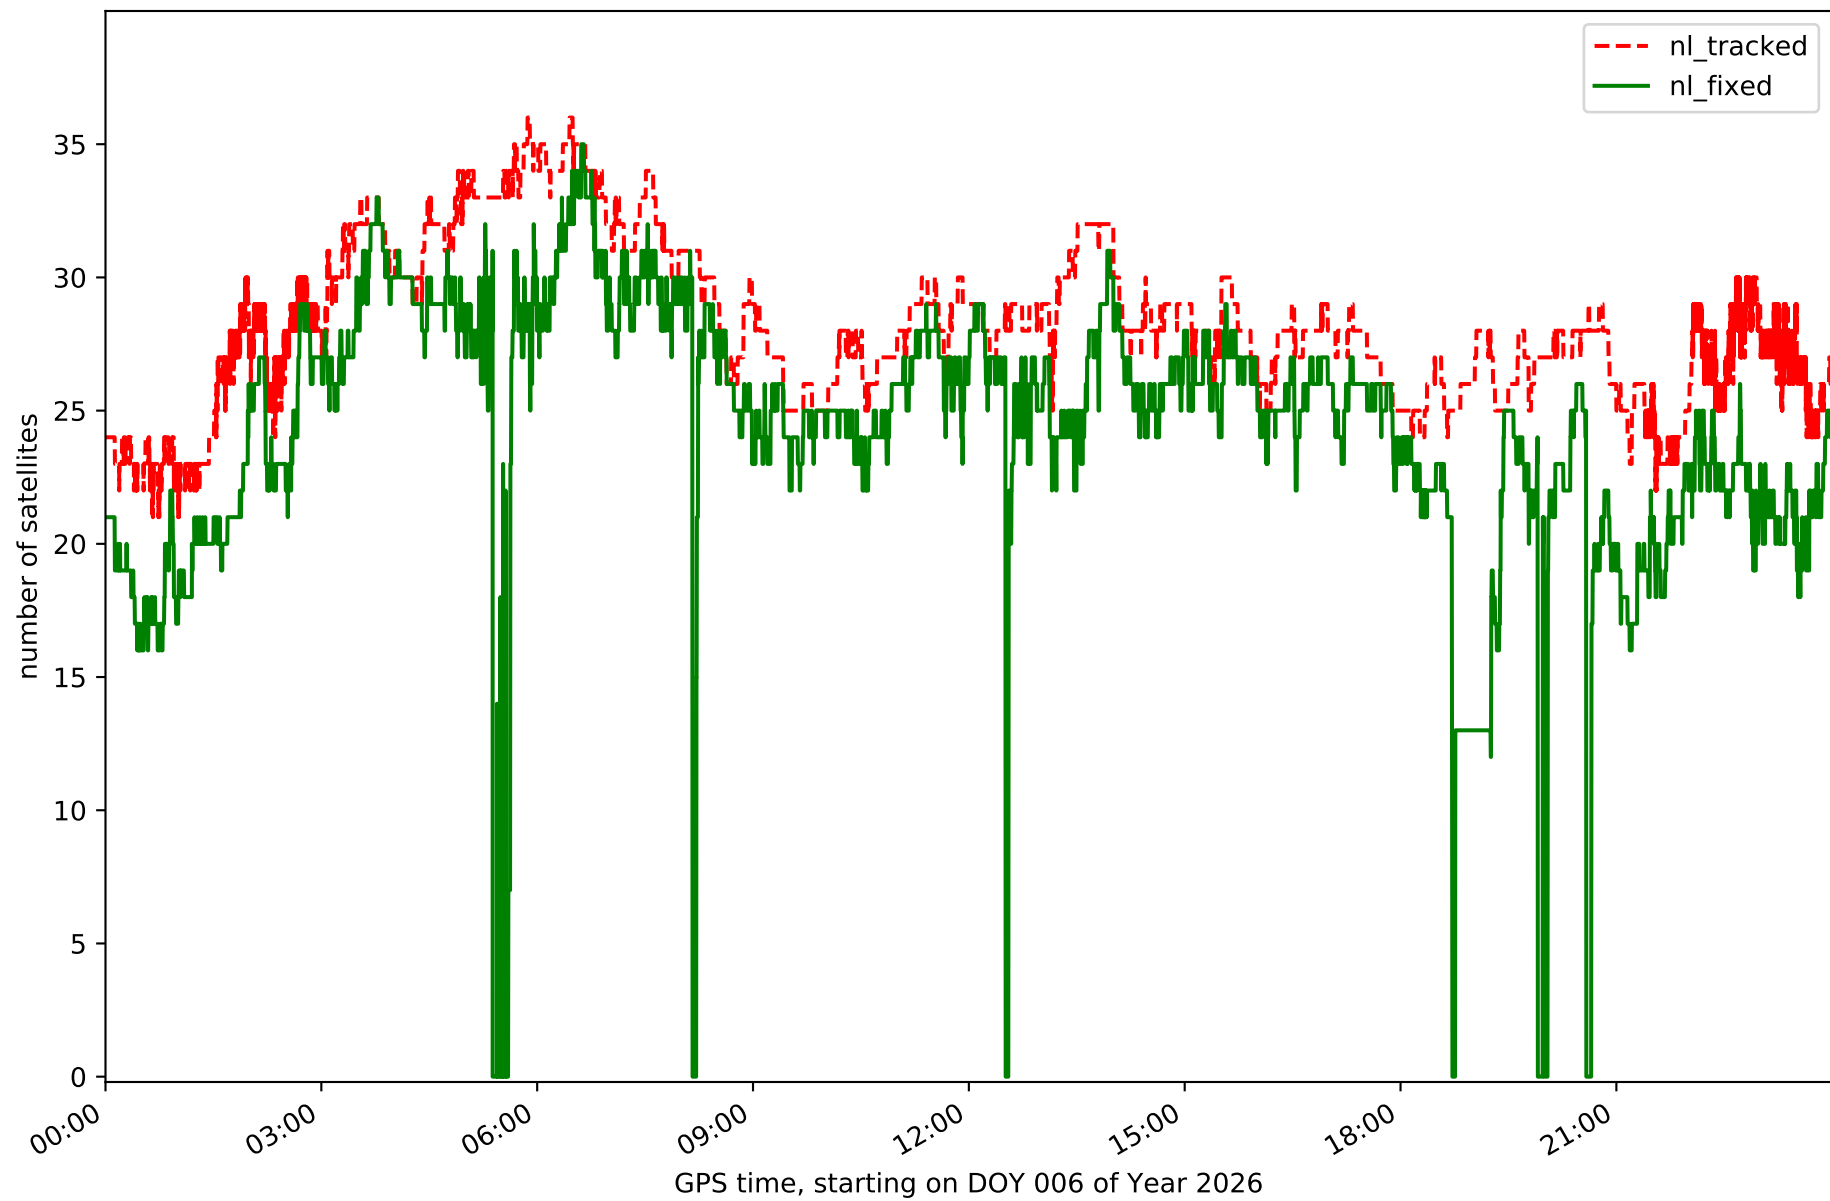


Station LP01 in network N32T

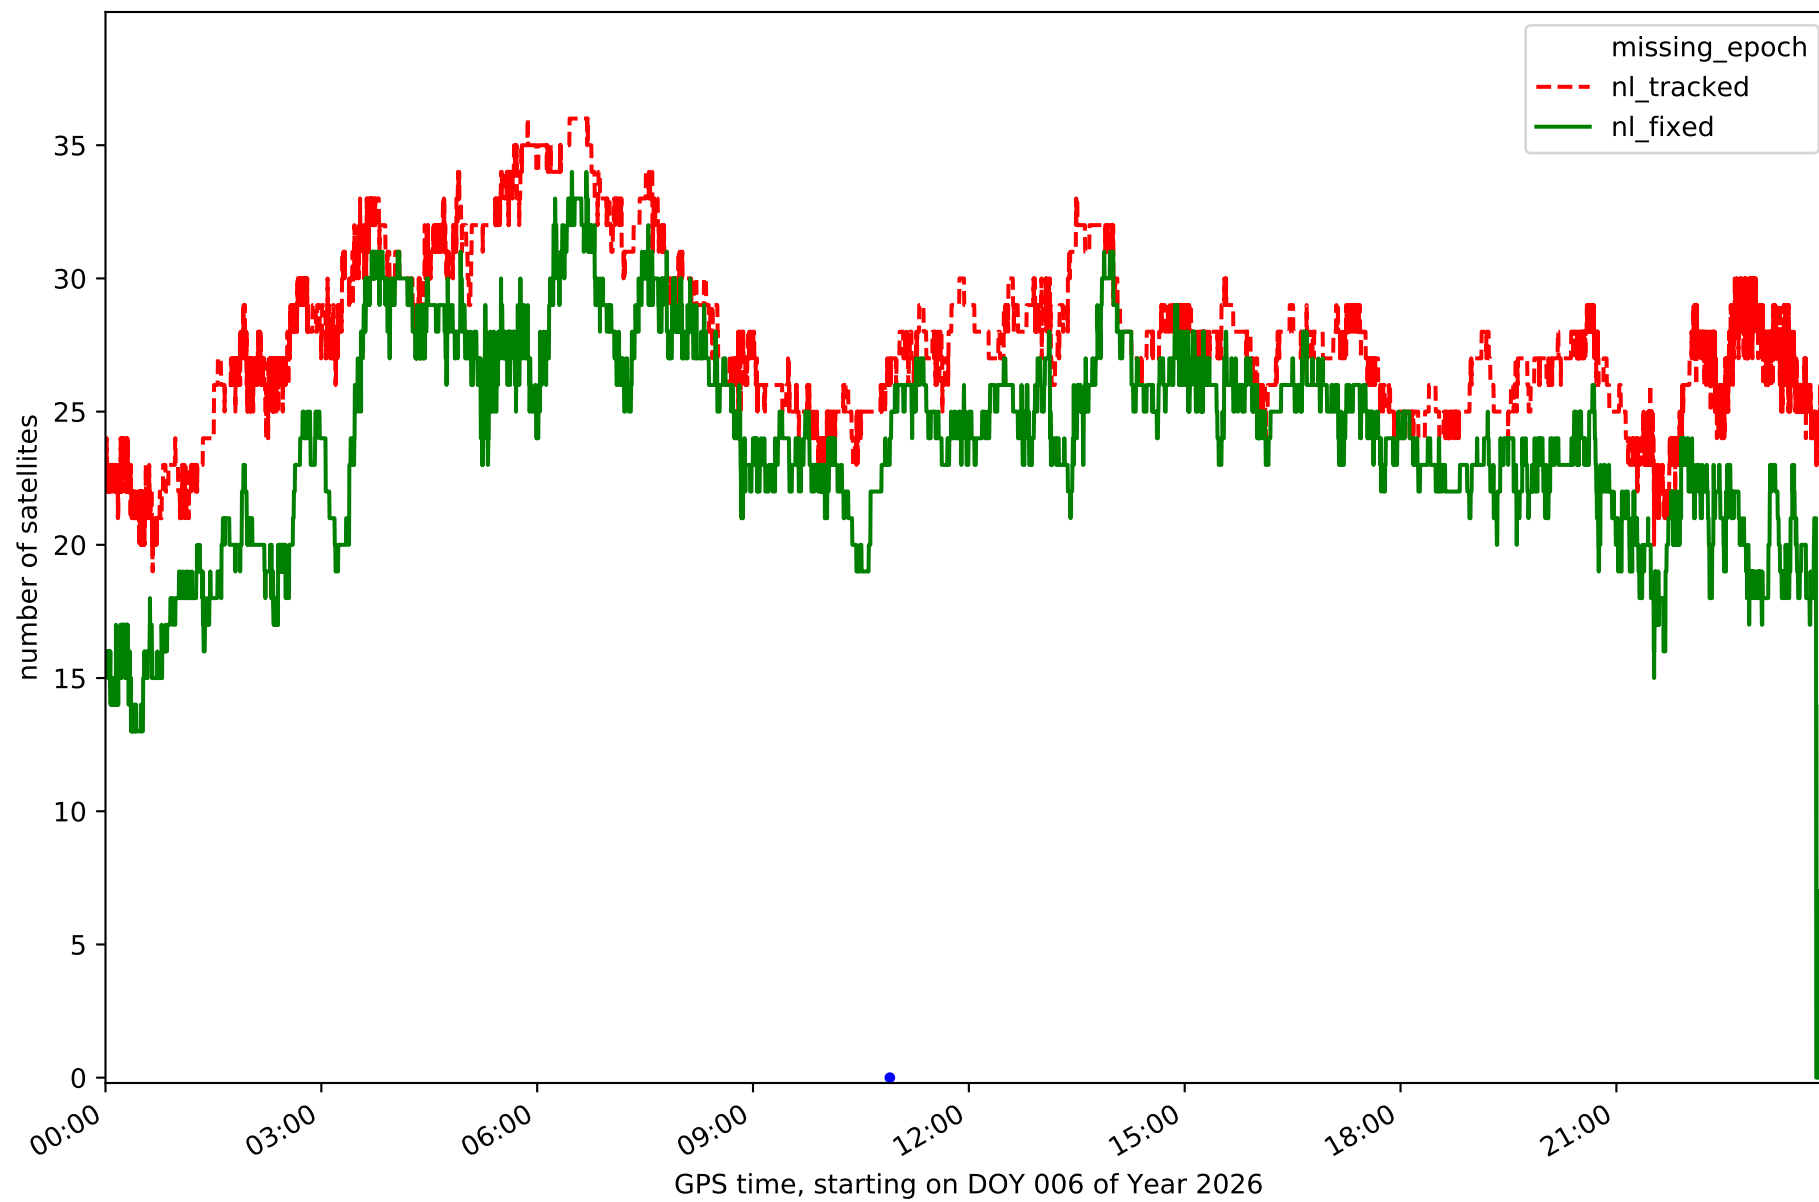


Station LP03 in network N32T

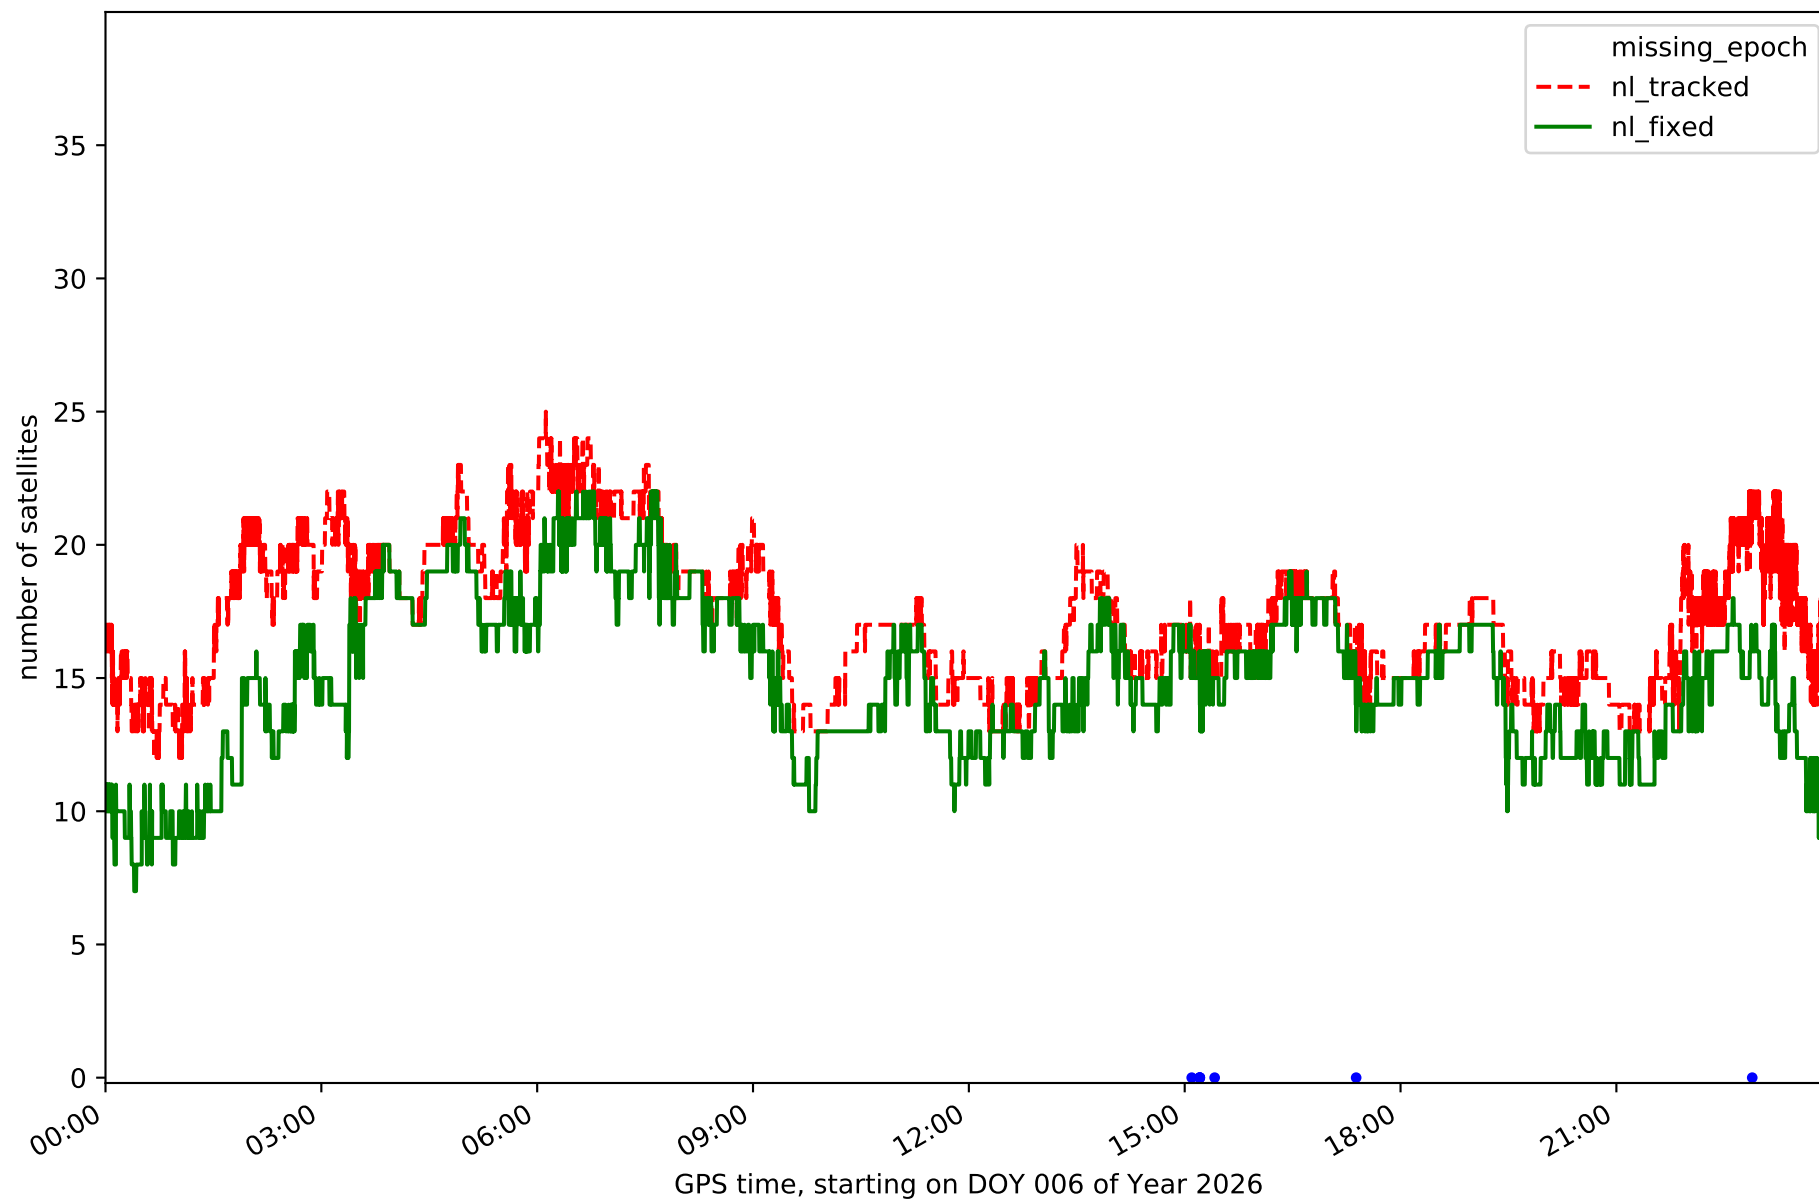


Station LPAL in network N32T

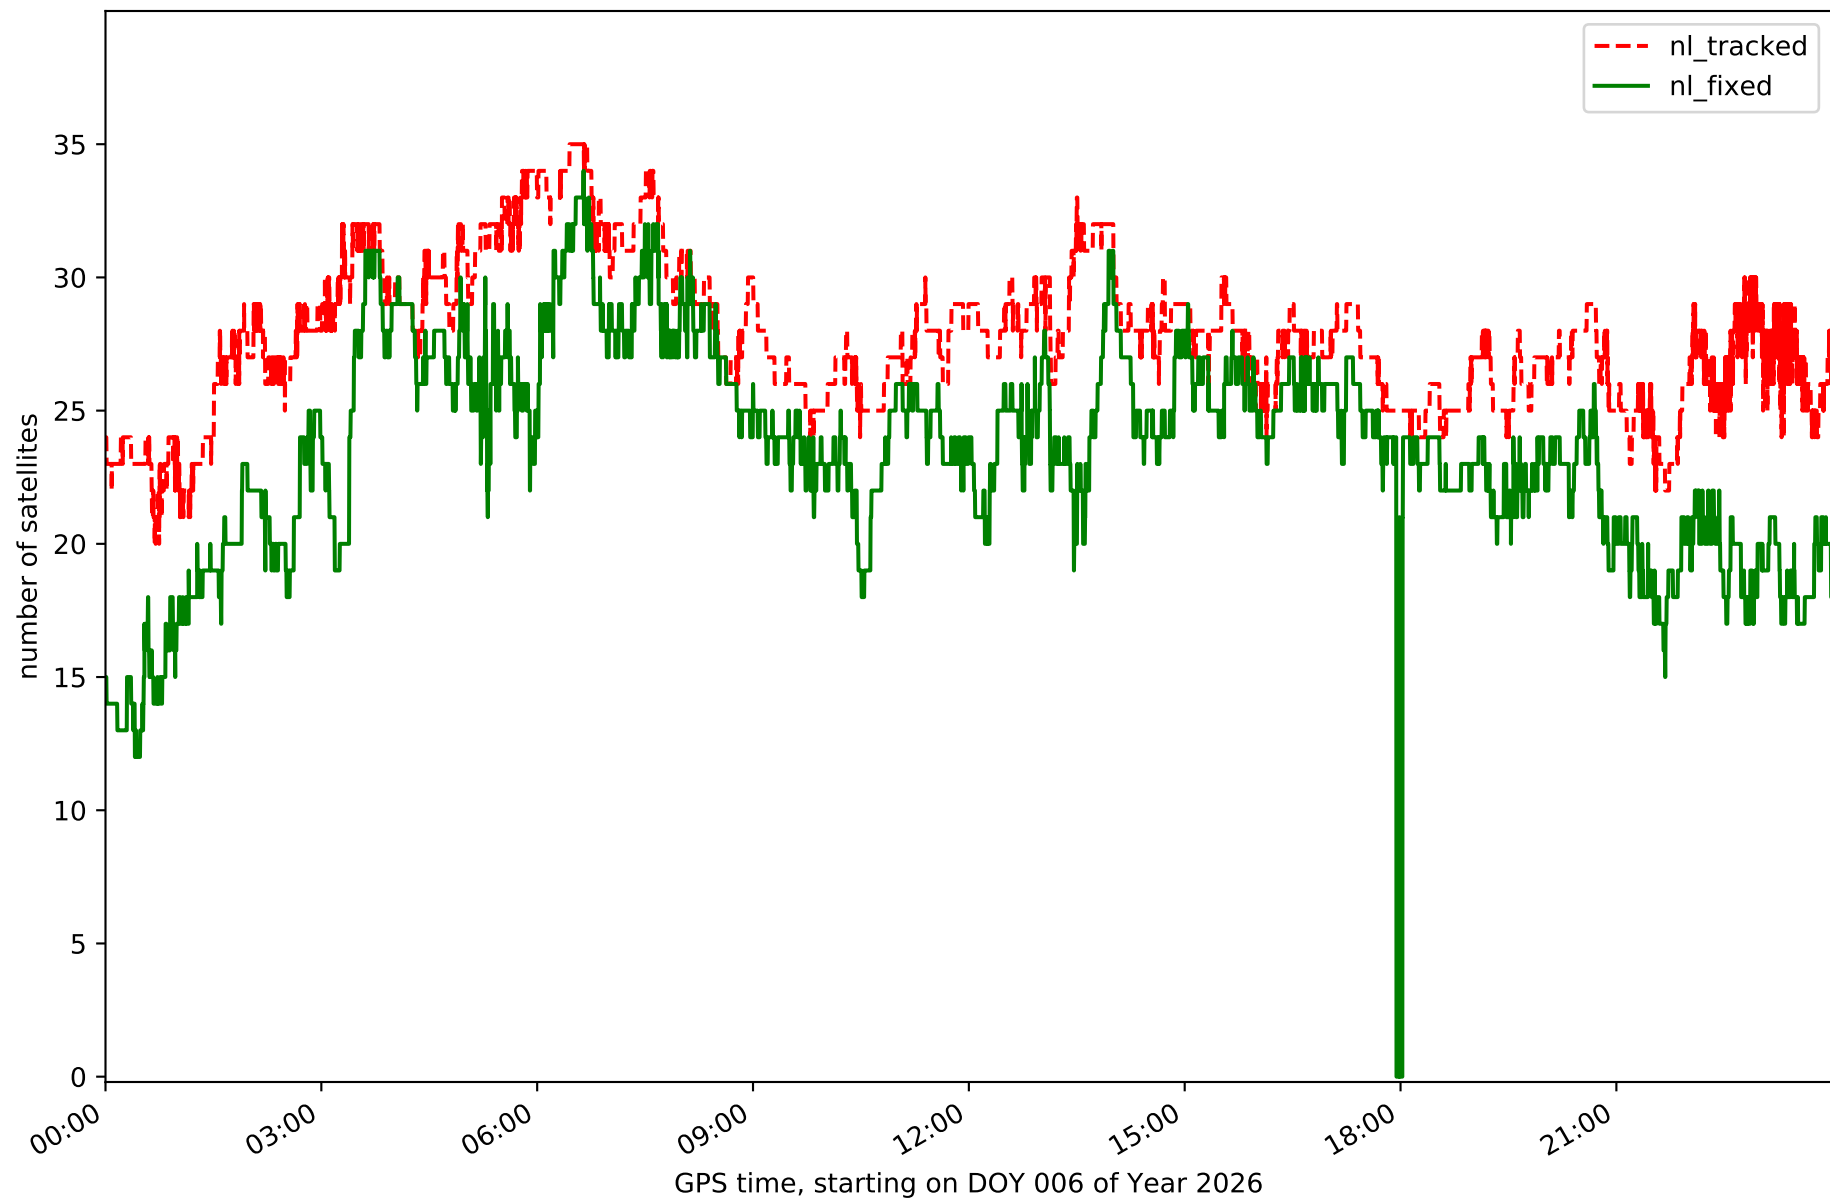


Station LRES in network N32T

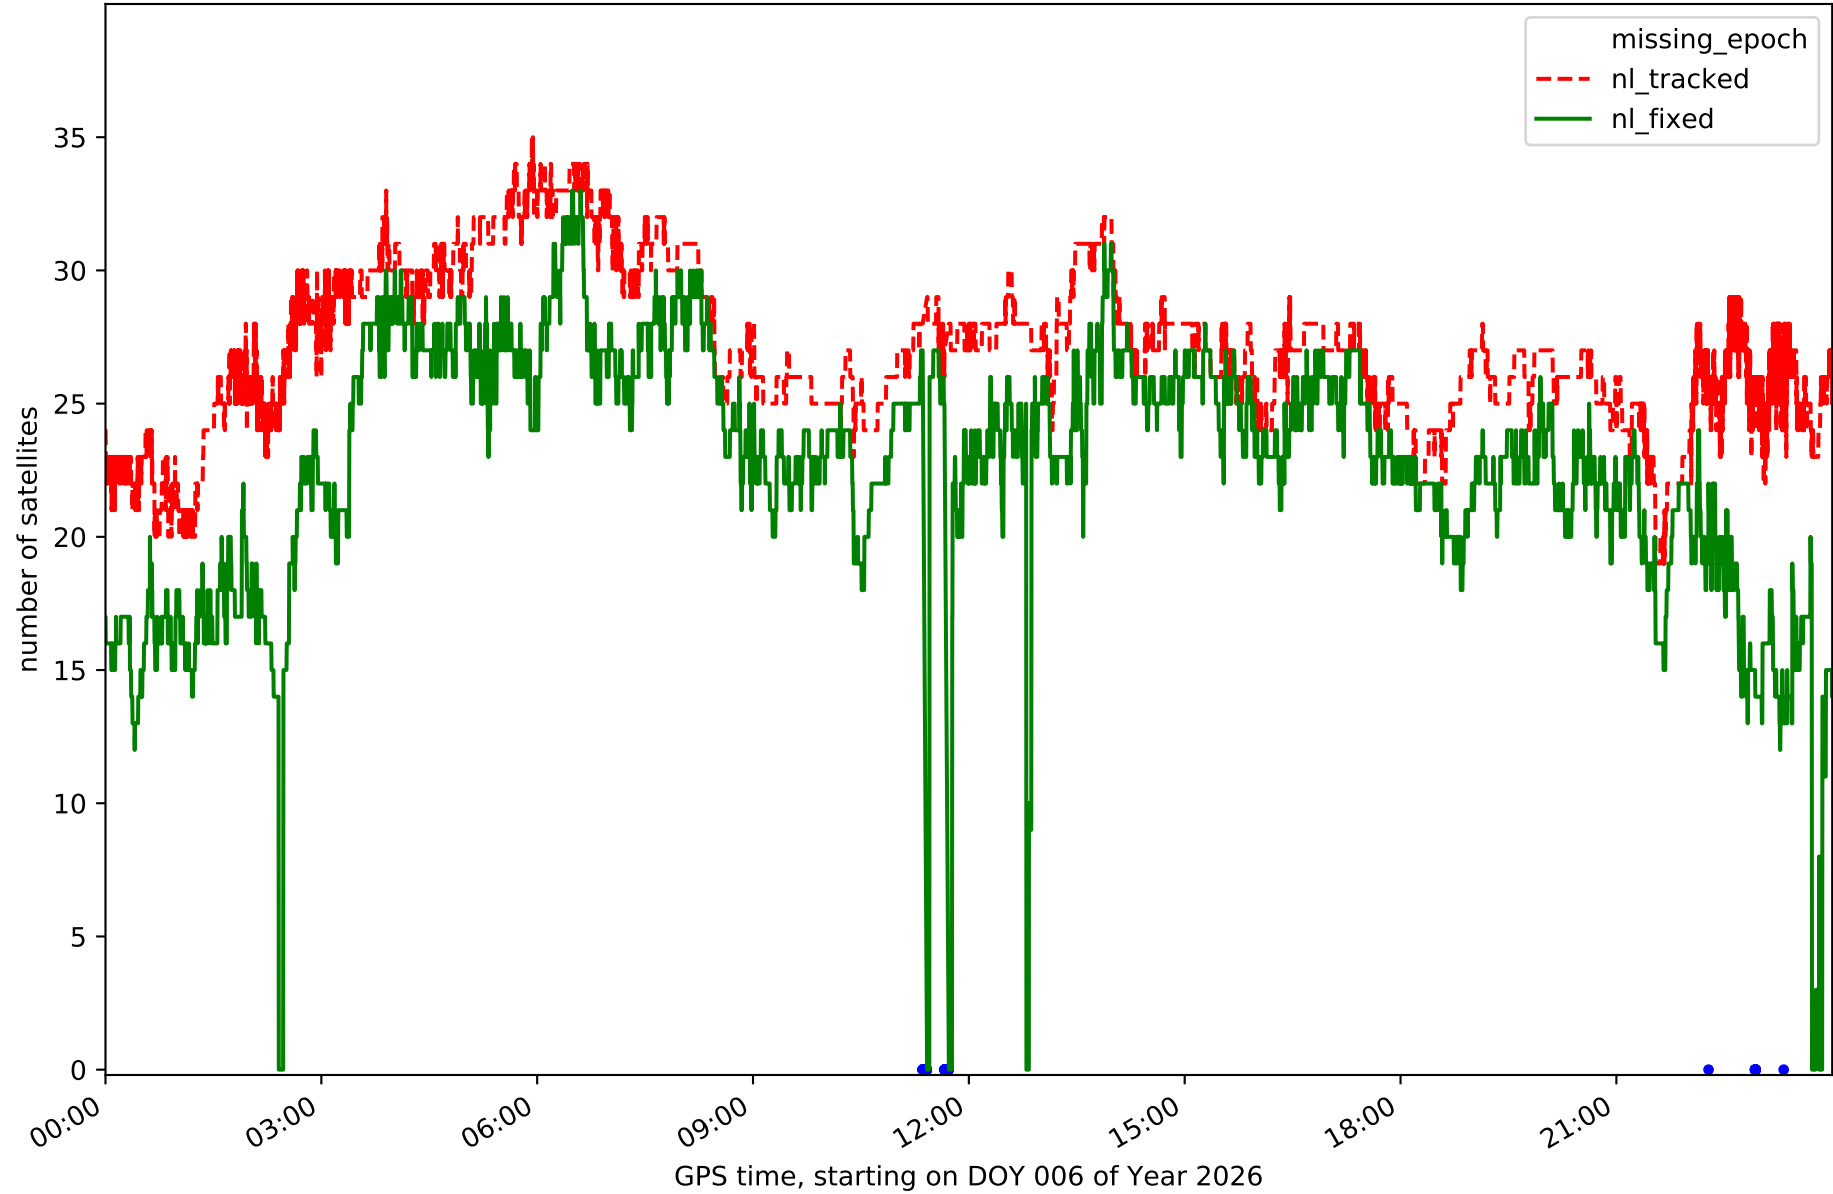


Station TN01 in network N32T

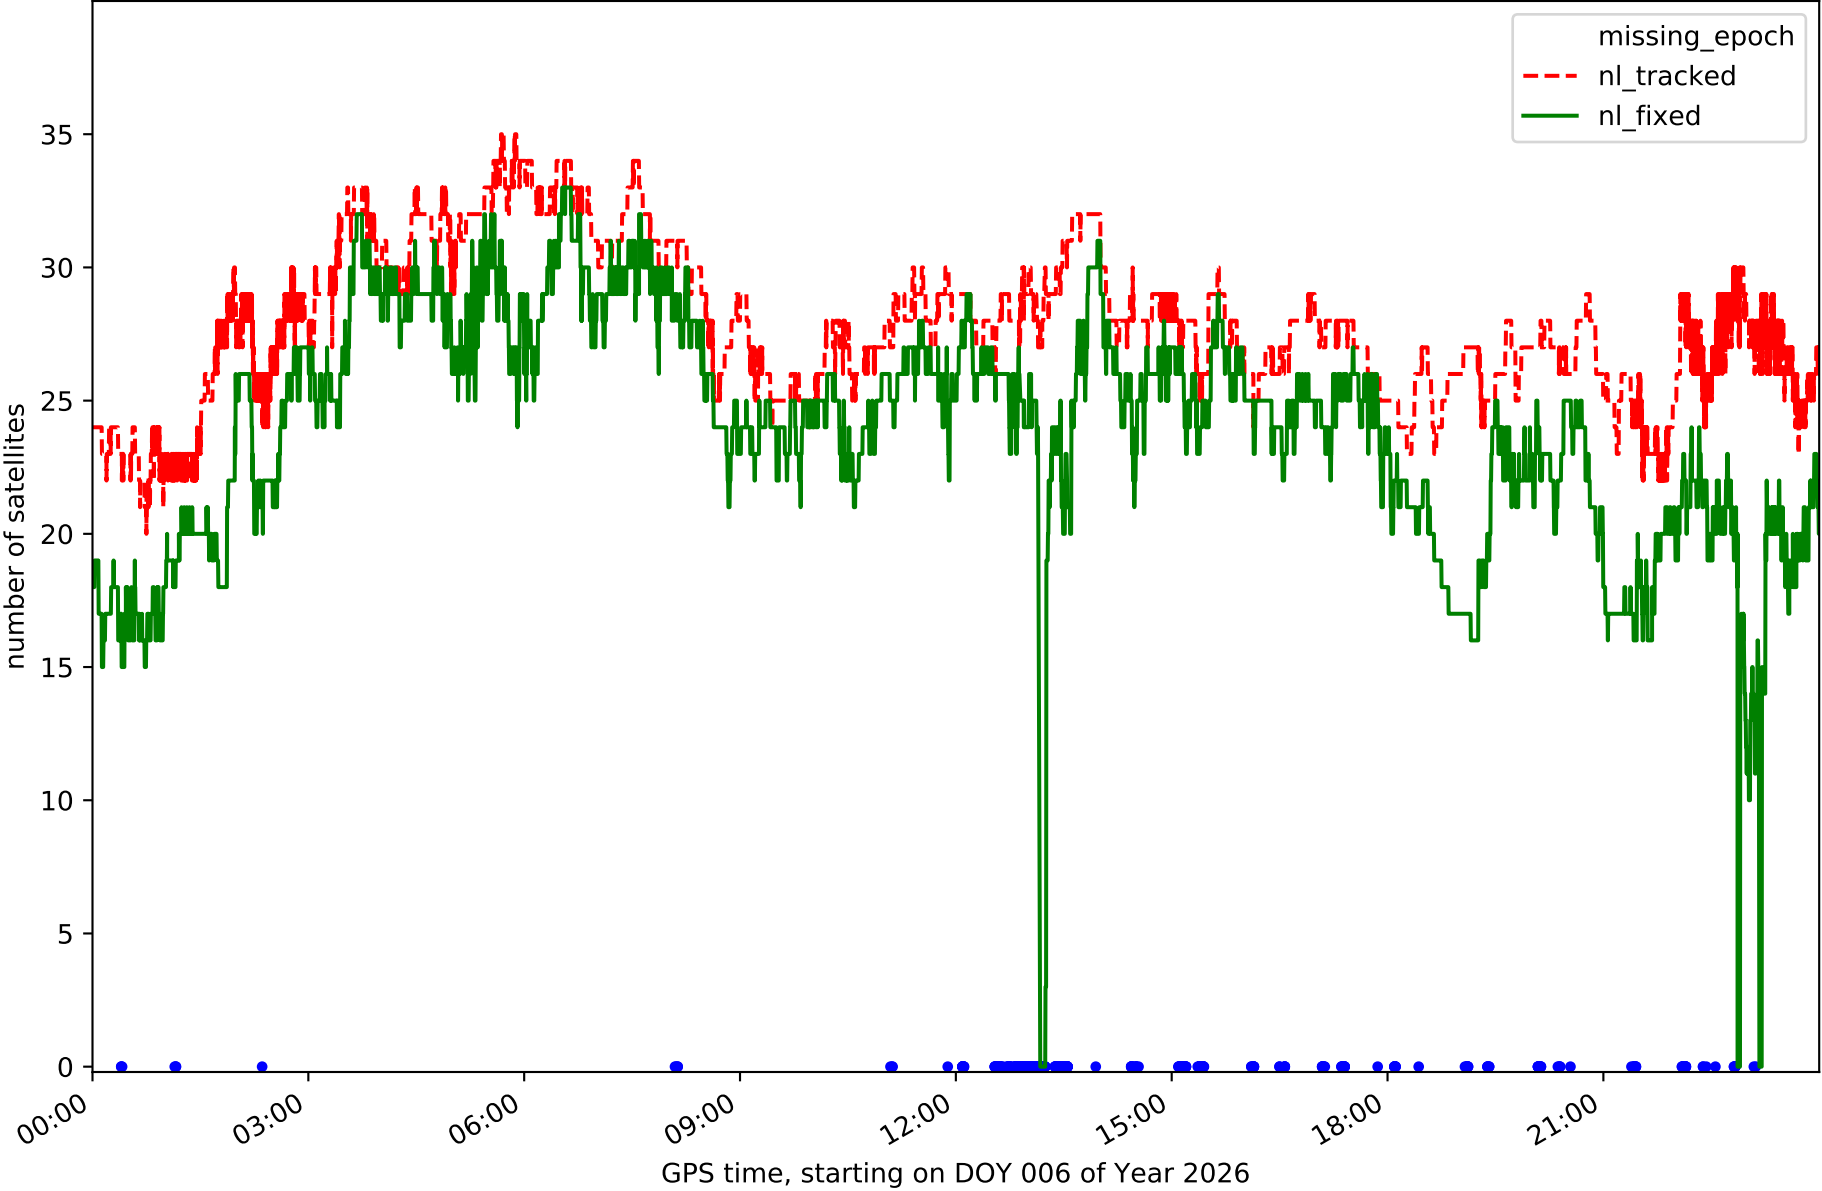


Station TN02 in network N32T

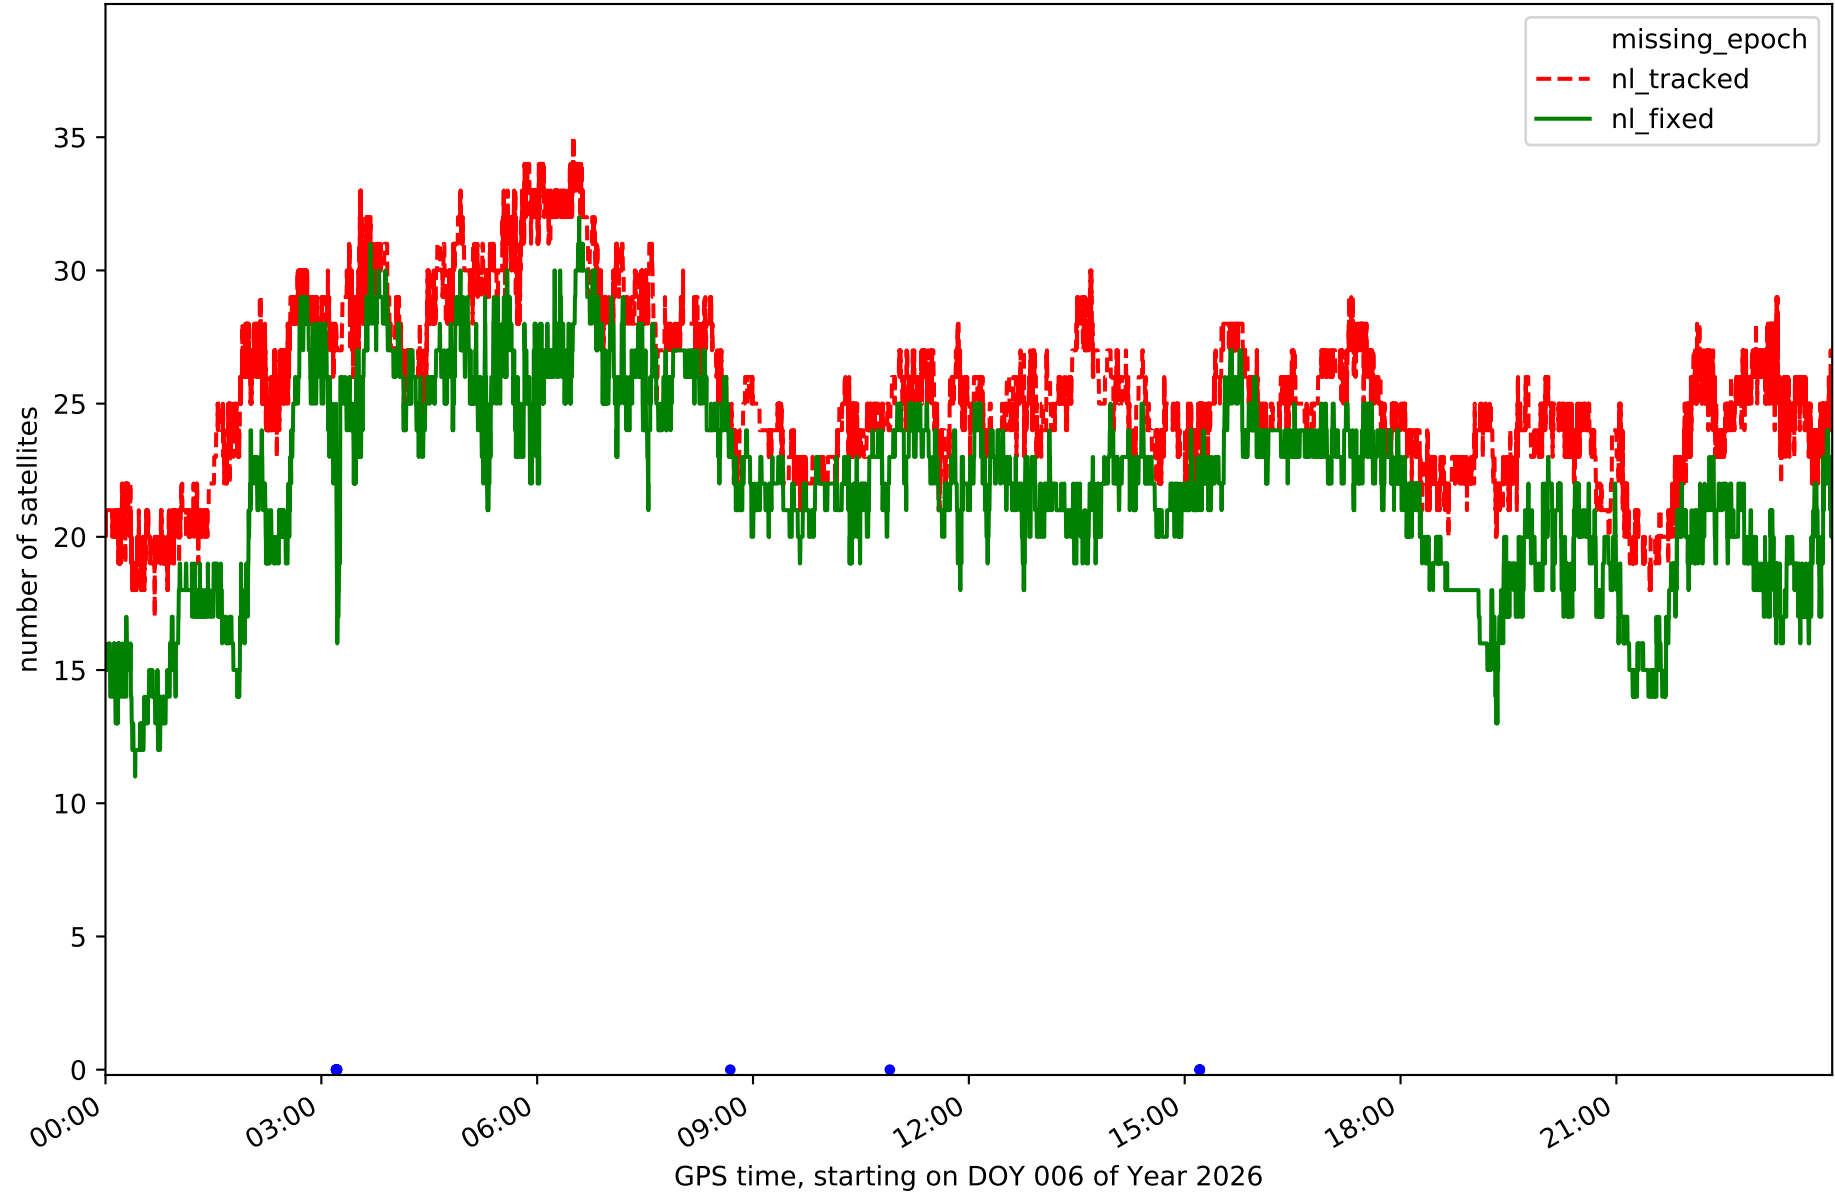


Station TN03 in network N32T

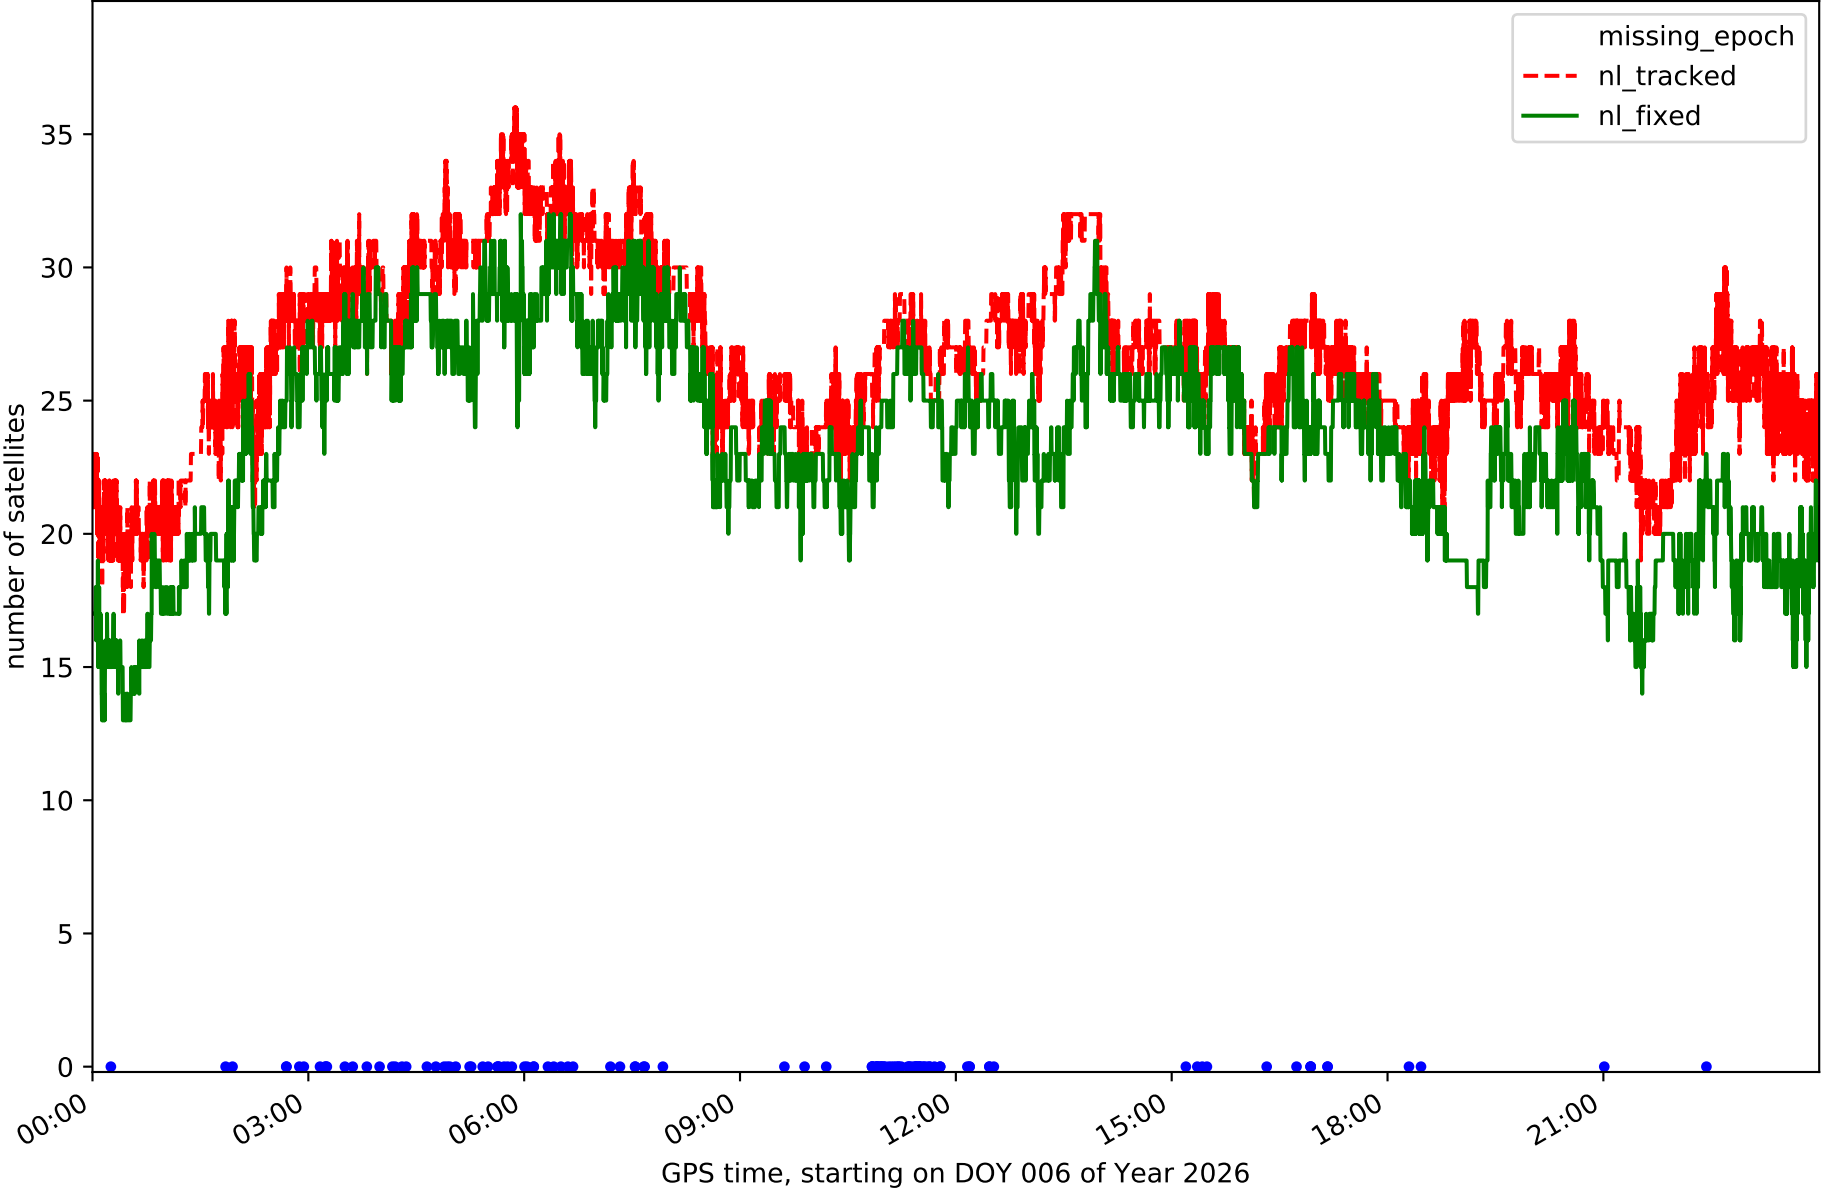


Station TN06 in network N32T

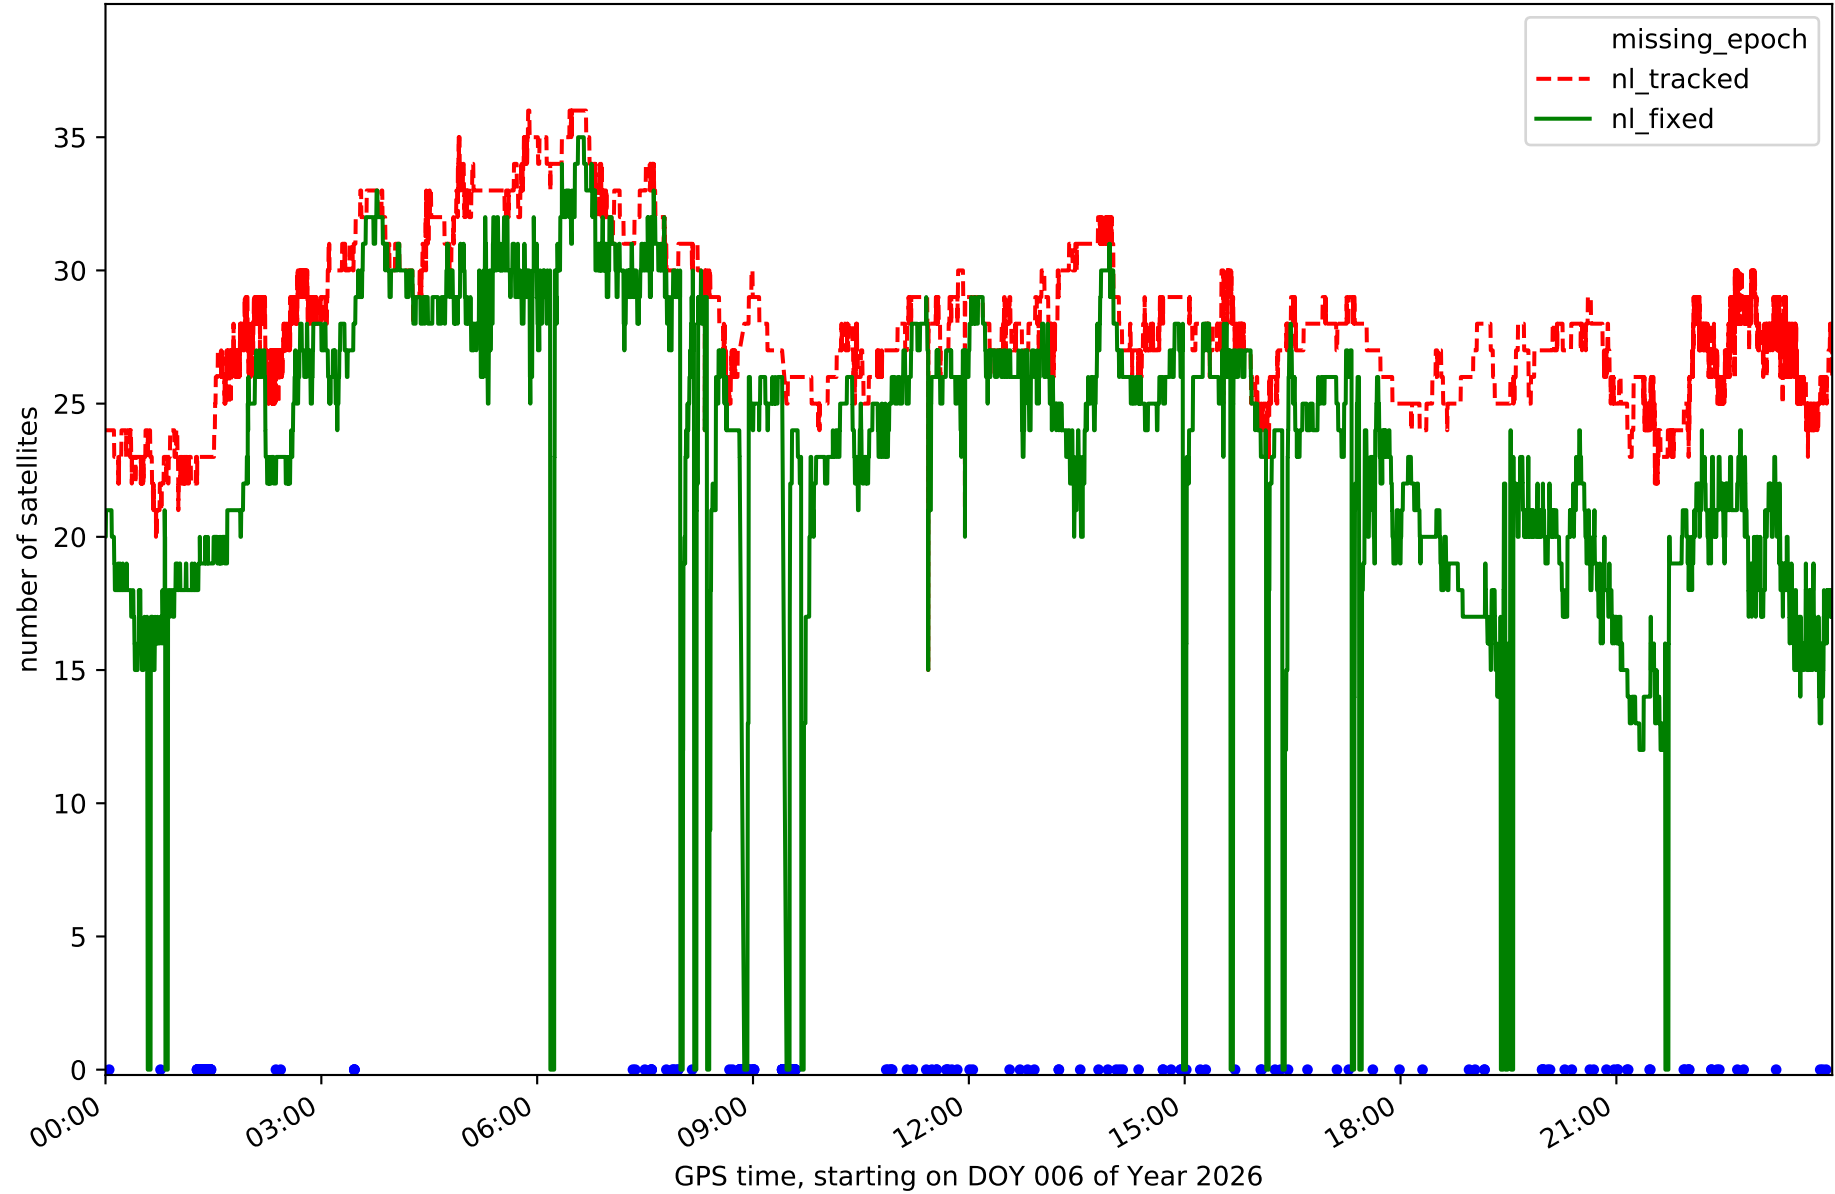


Station TN09 in network N32T

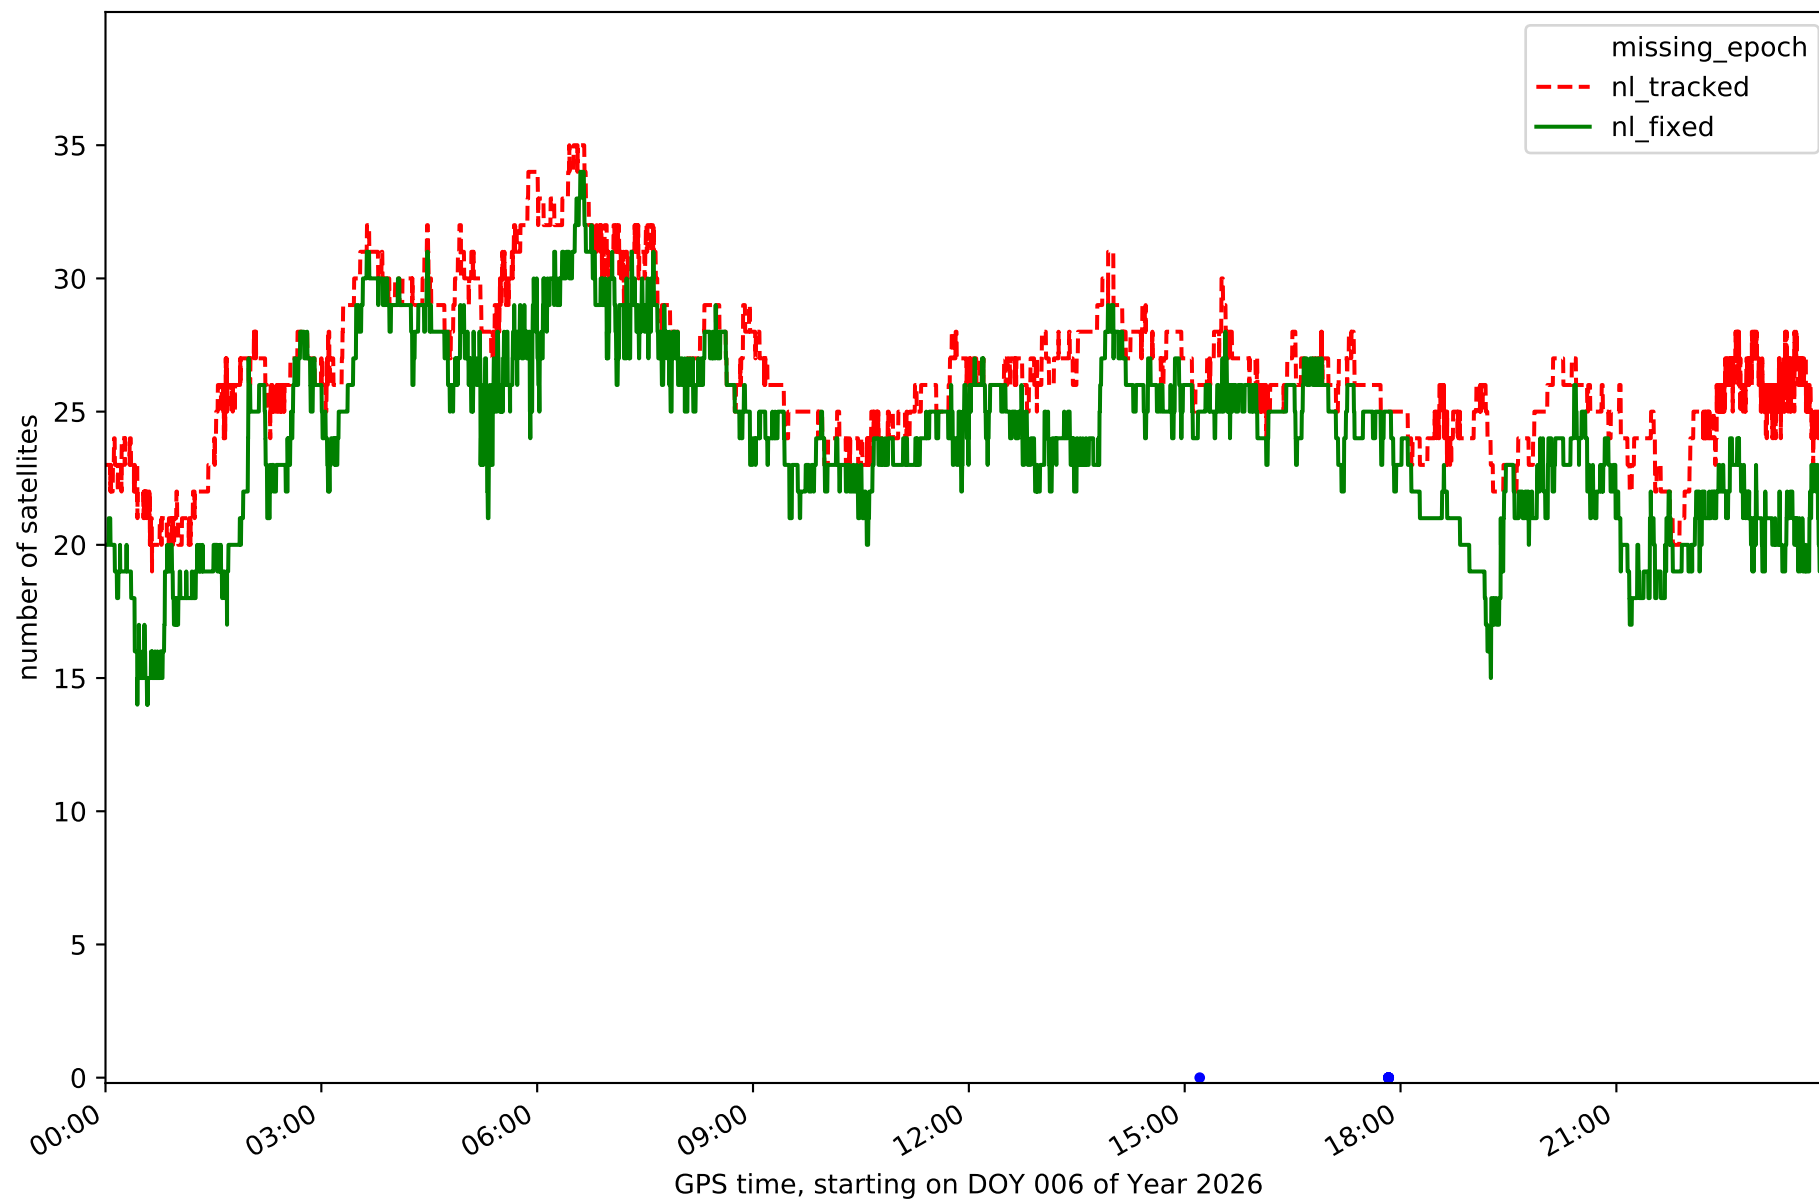


Station TE11 in network N32T

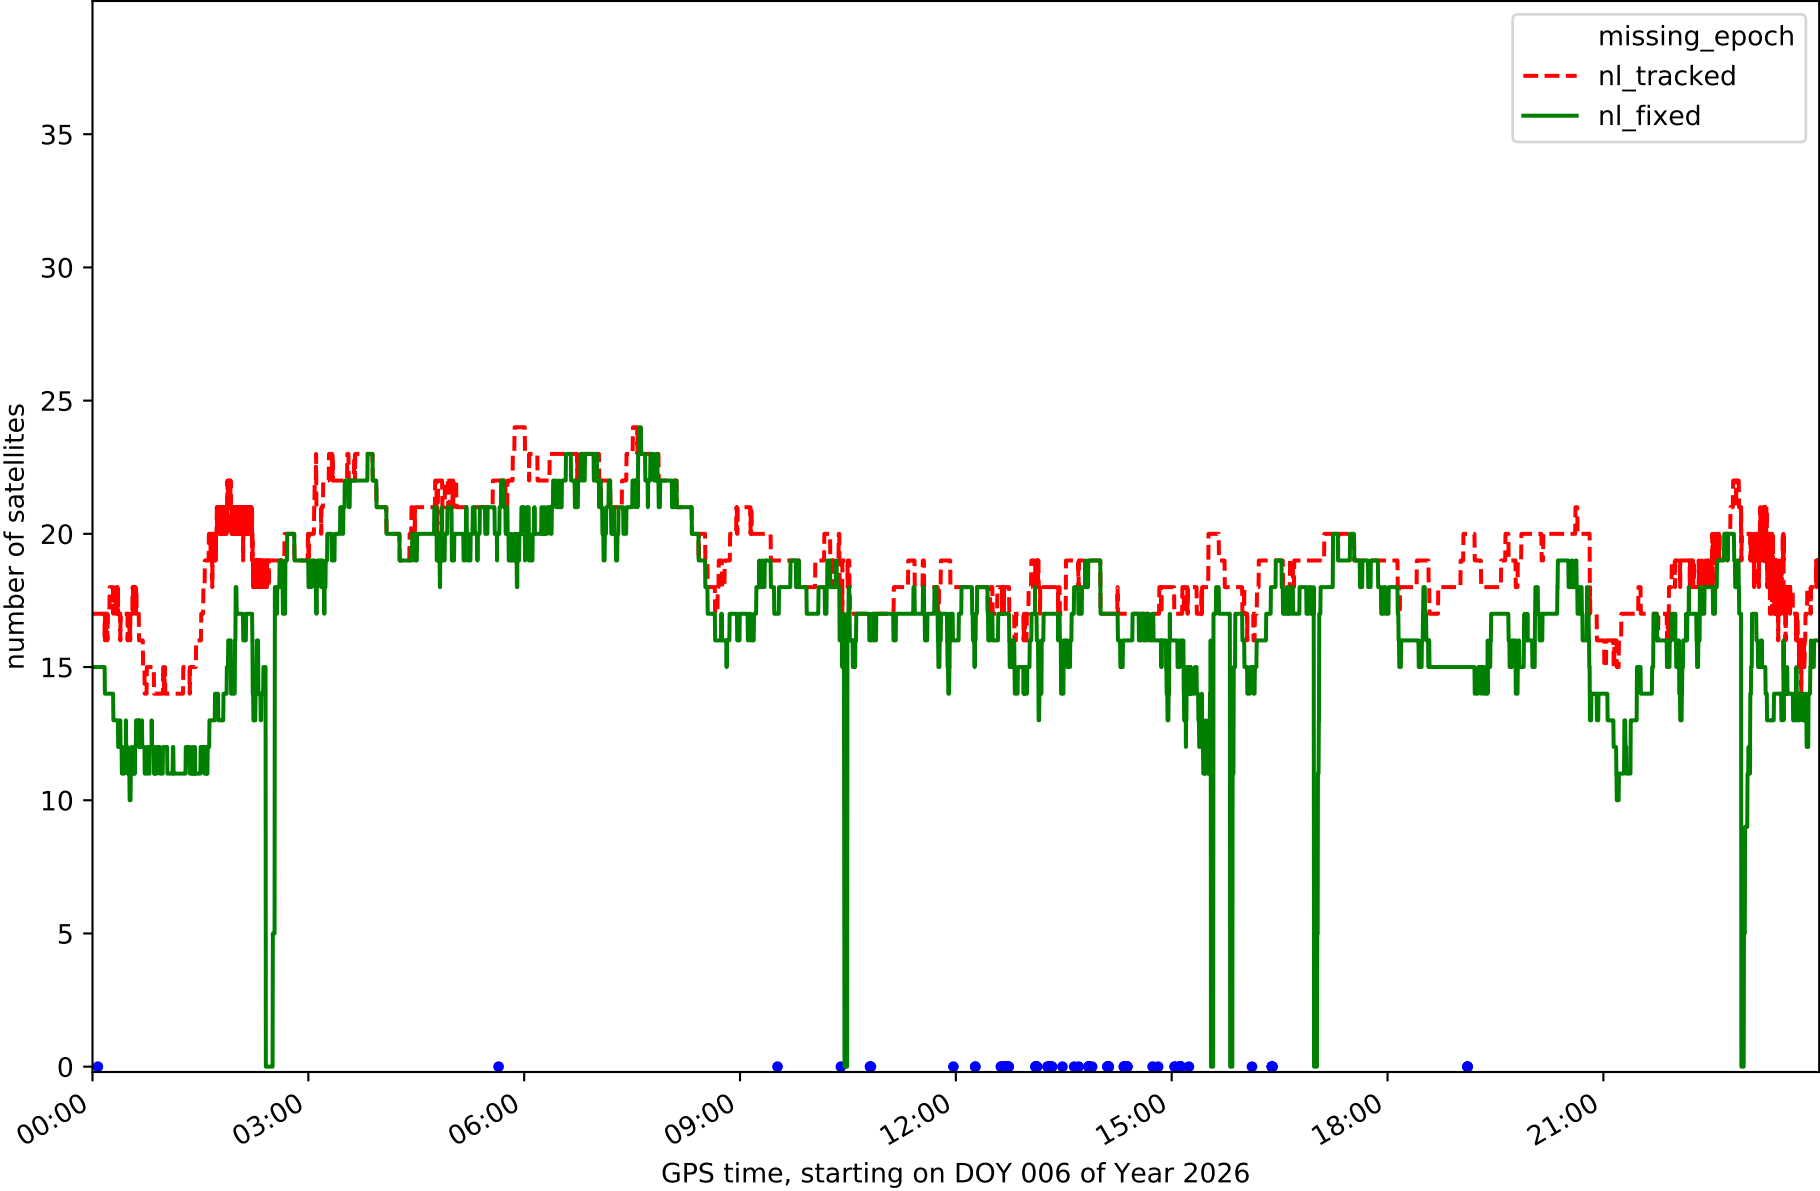


RefCheck for station EH01 in network N32T

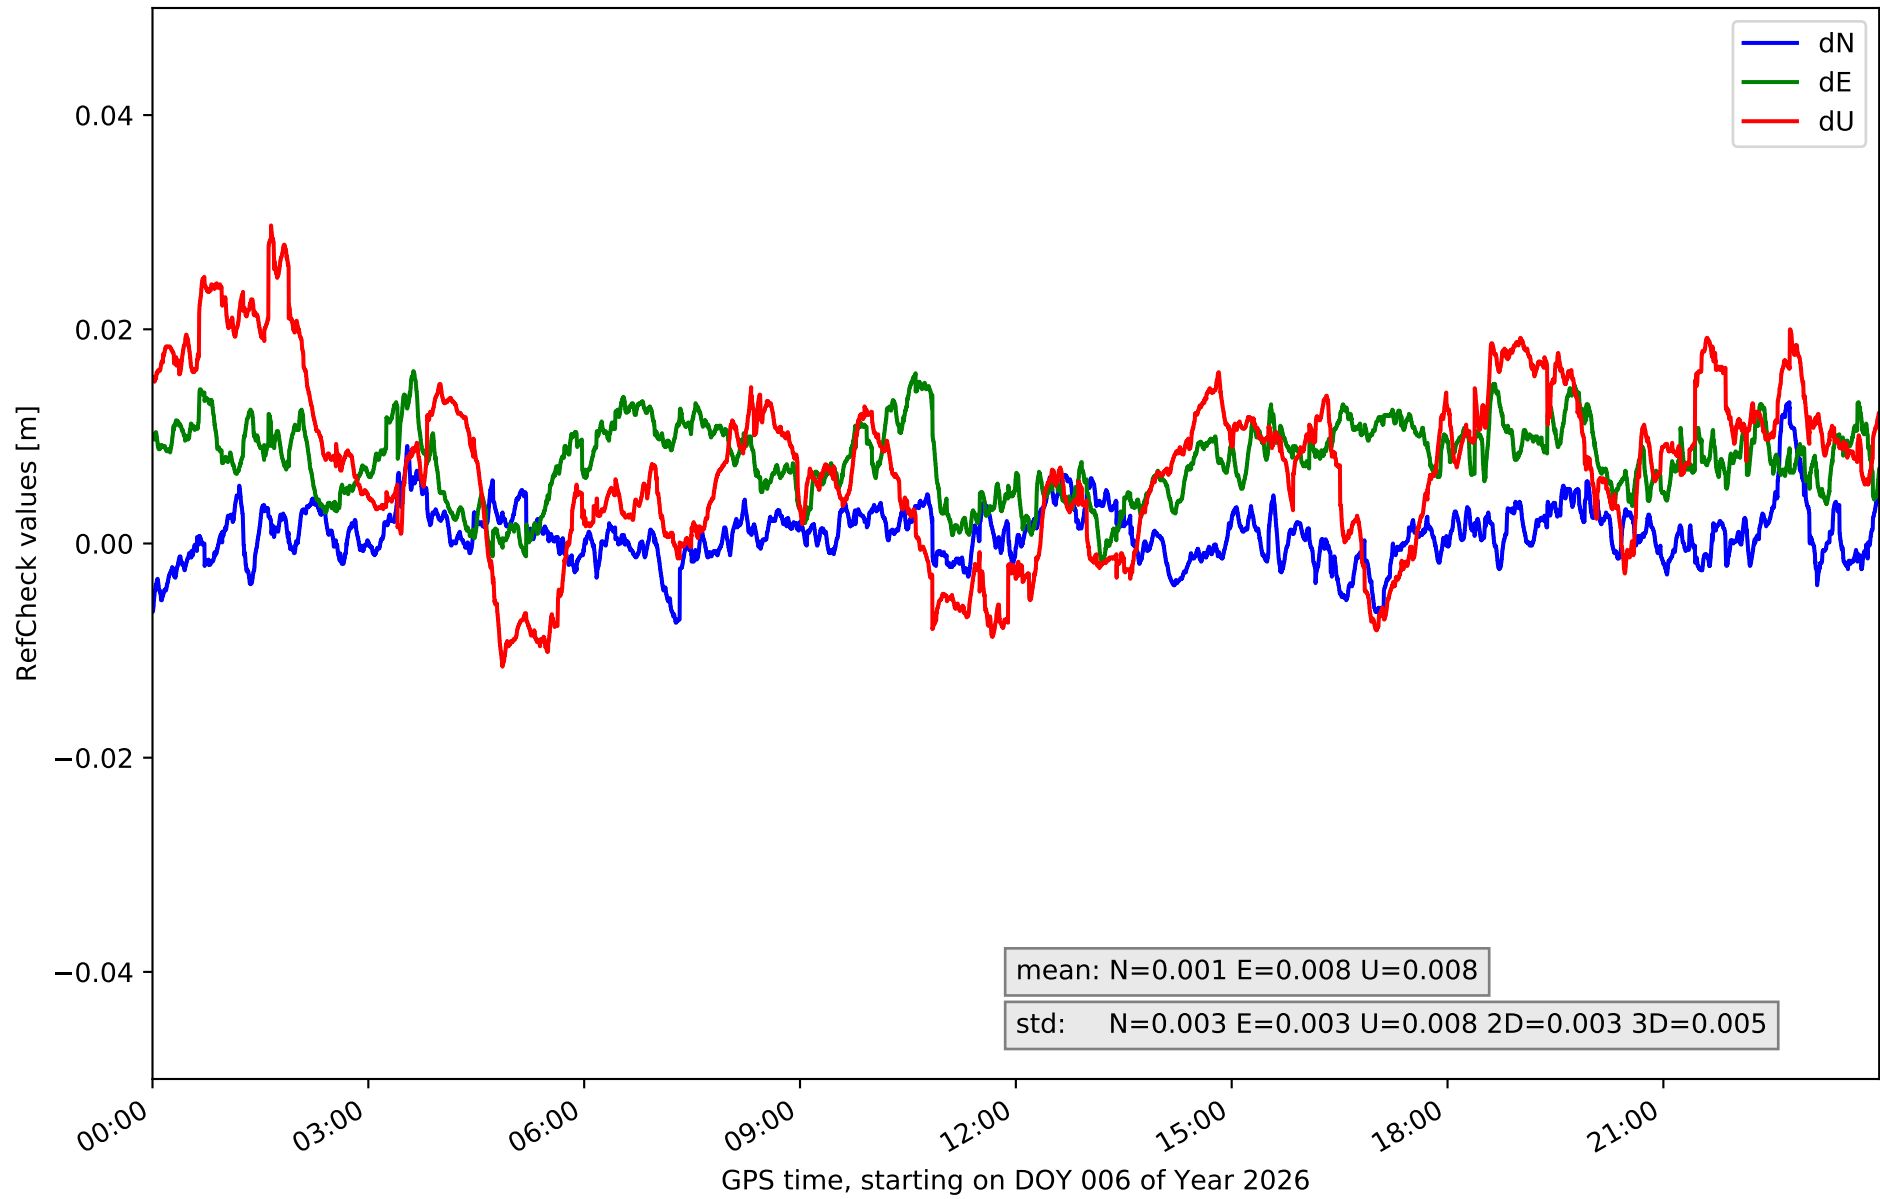


RefCheck for station EH02 in network N32T

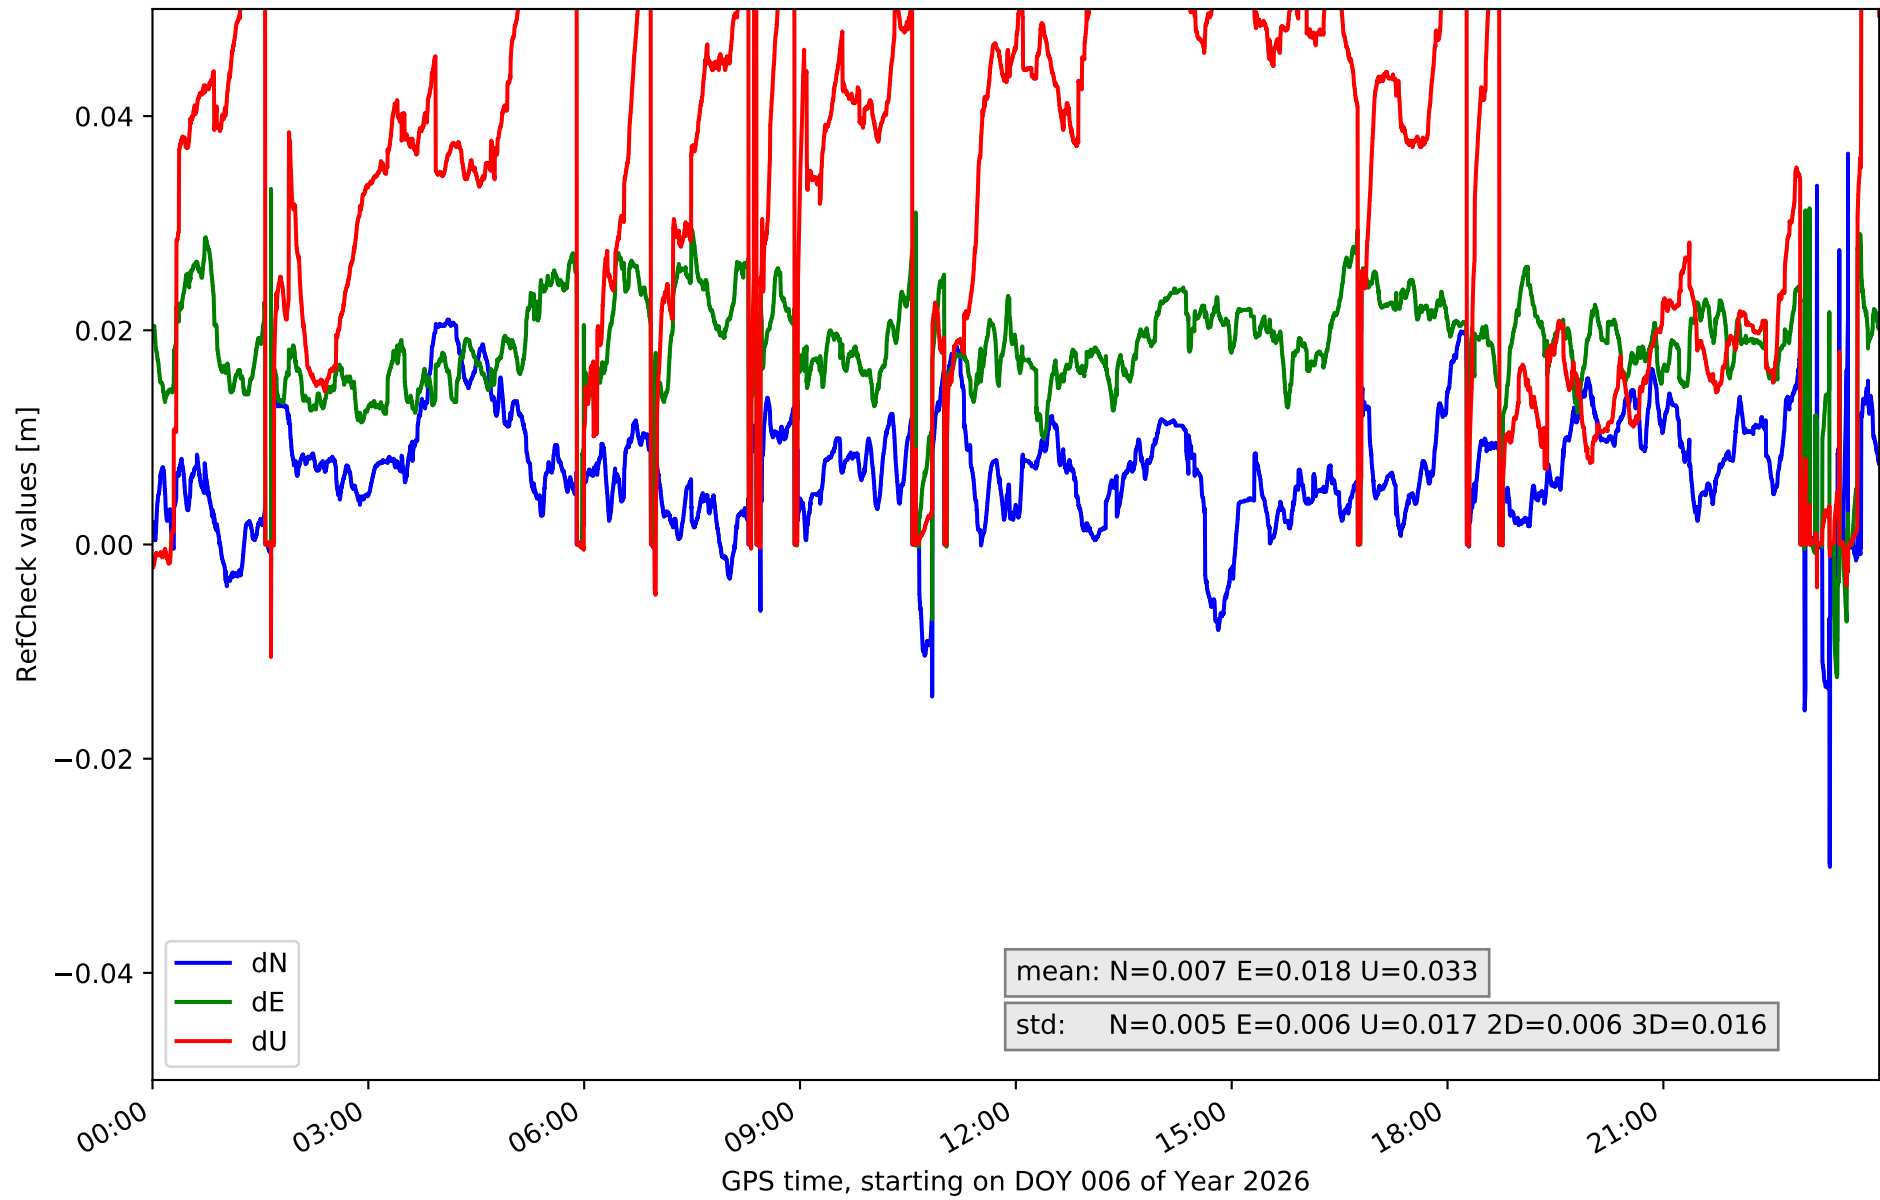


RefCheck for station GOM1 in network N32T

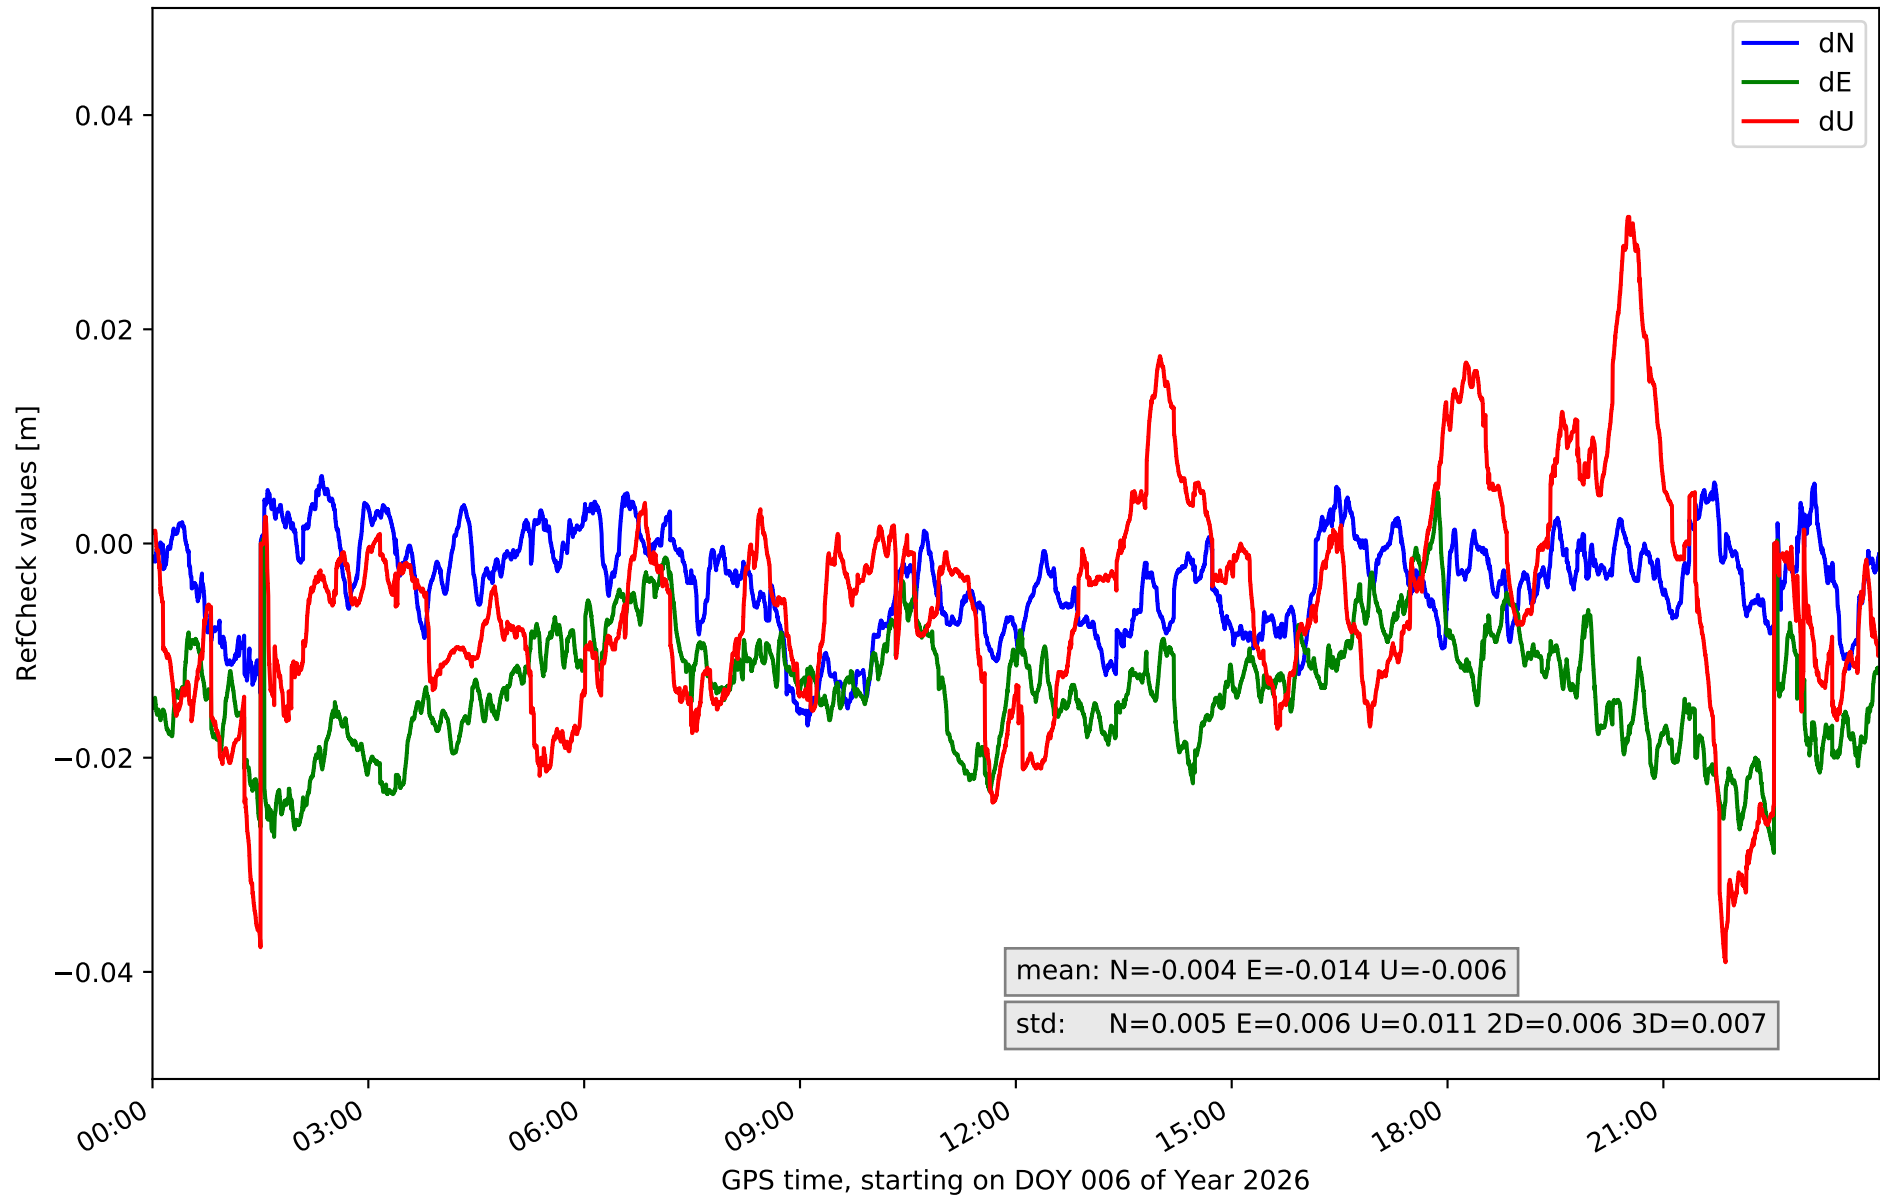


RefCheck for station GOME in network N32T

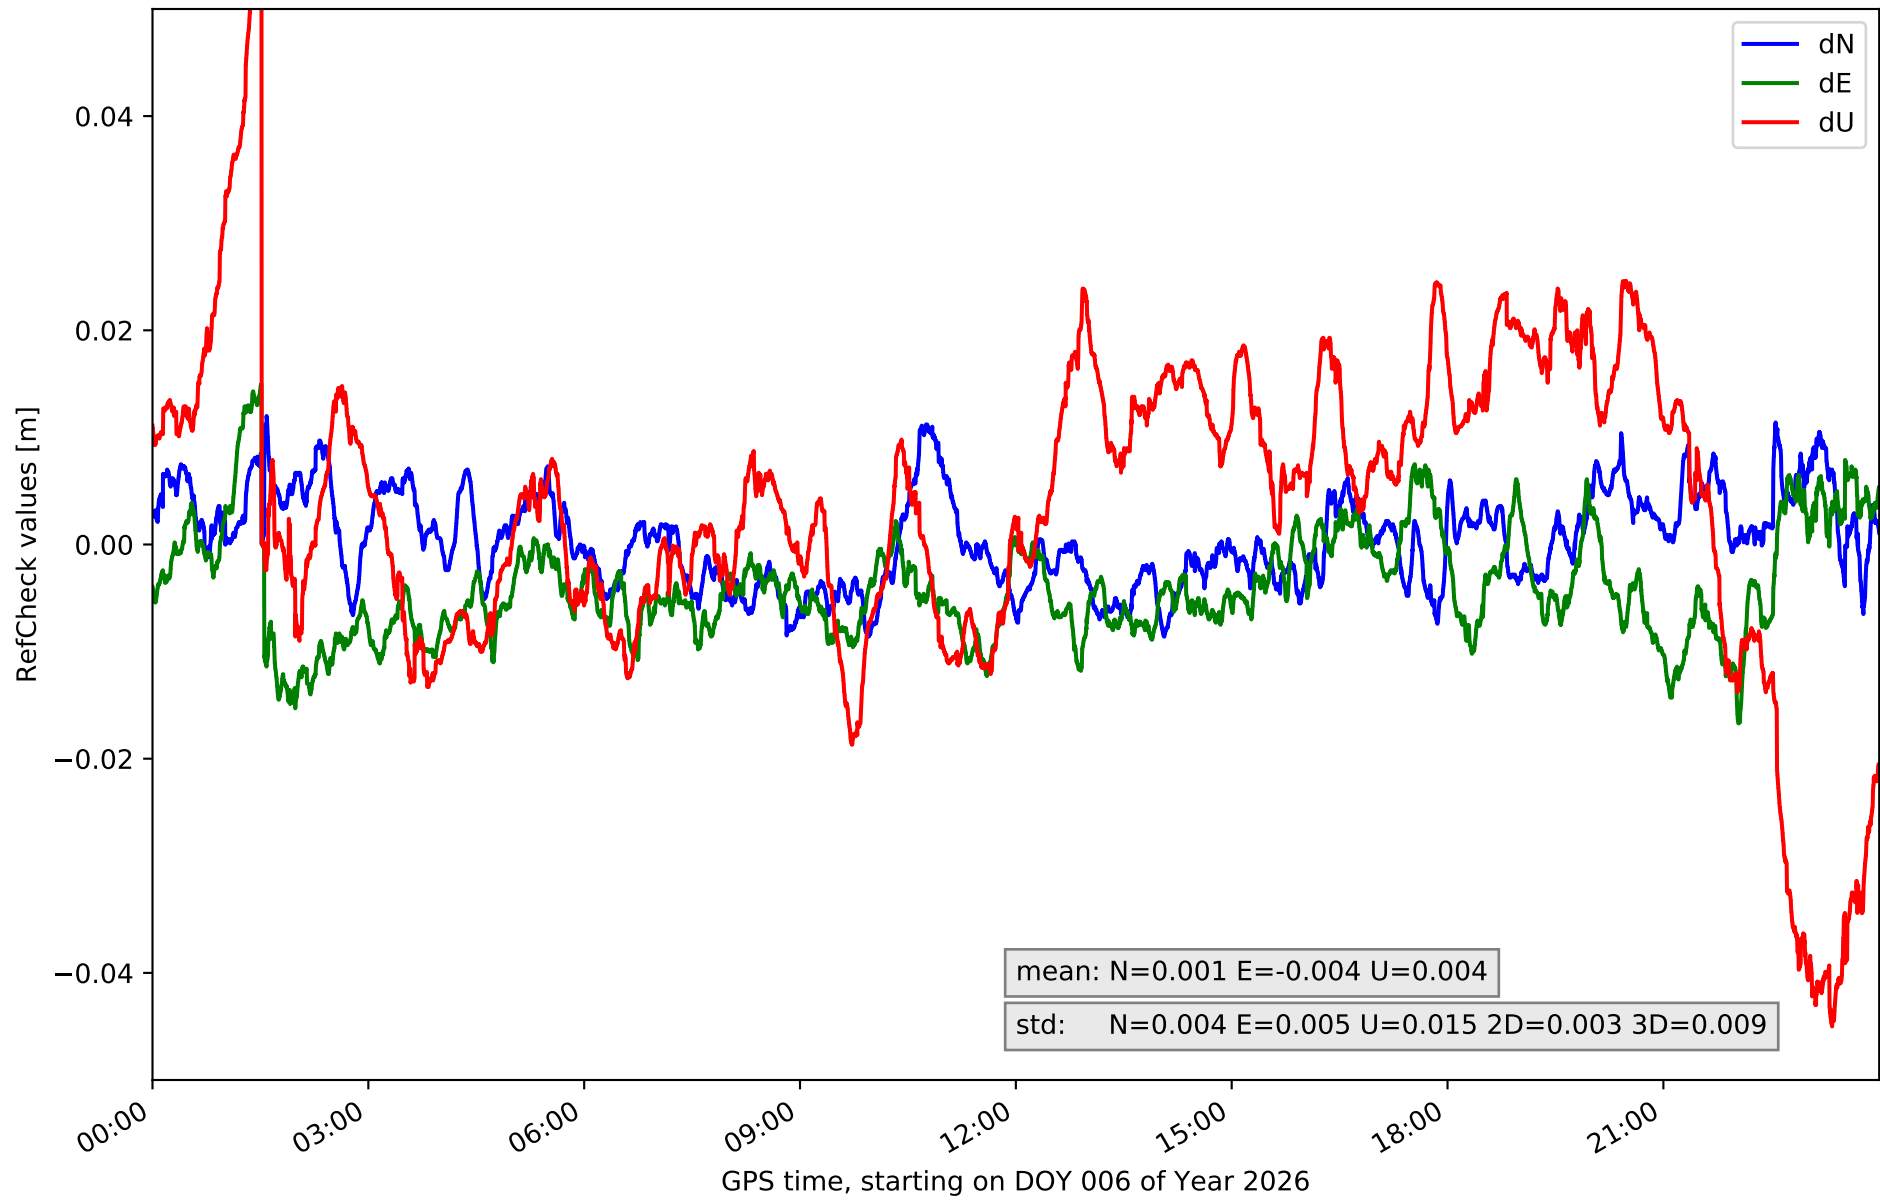


RefCheck for station IZAN in network N32T

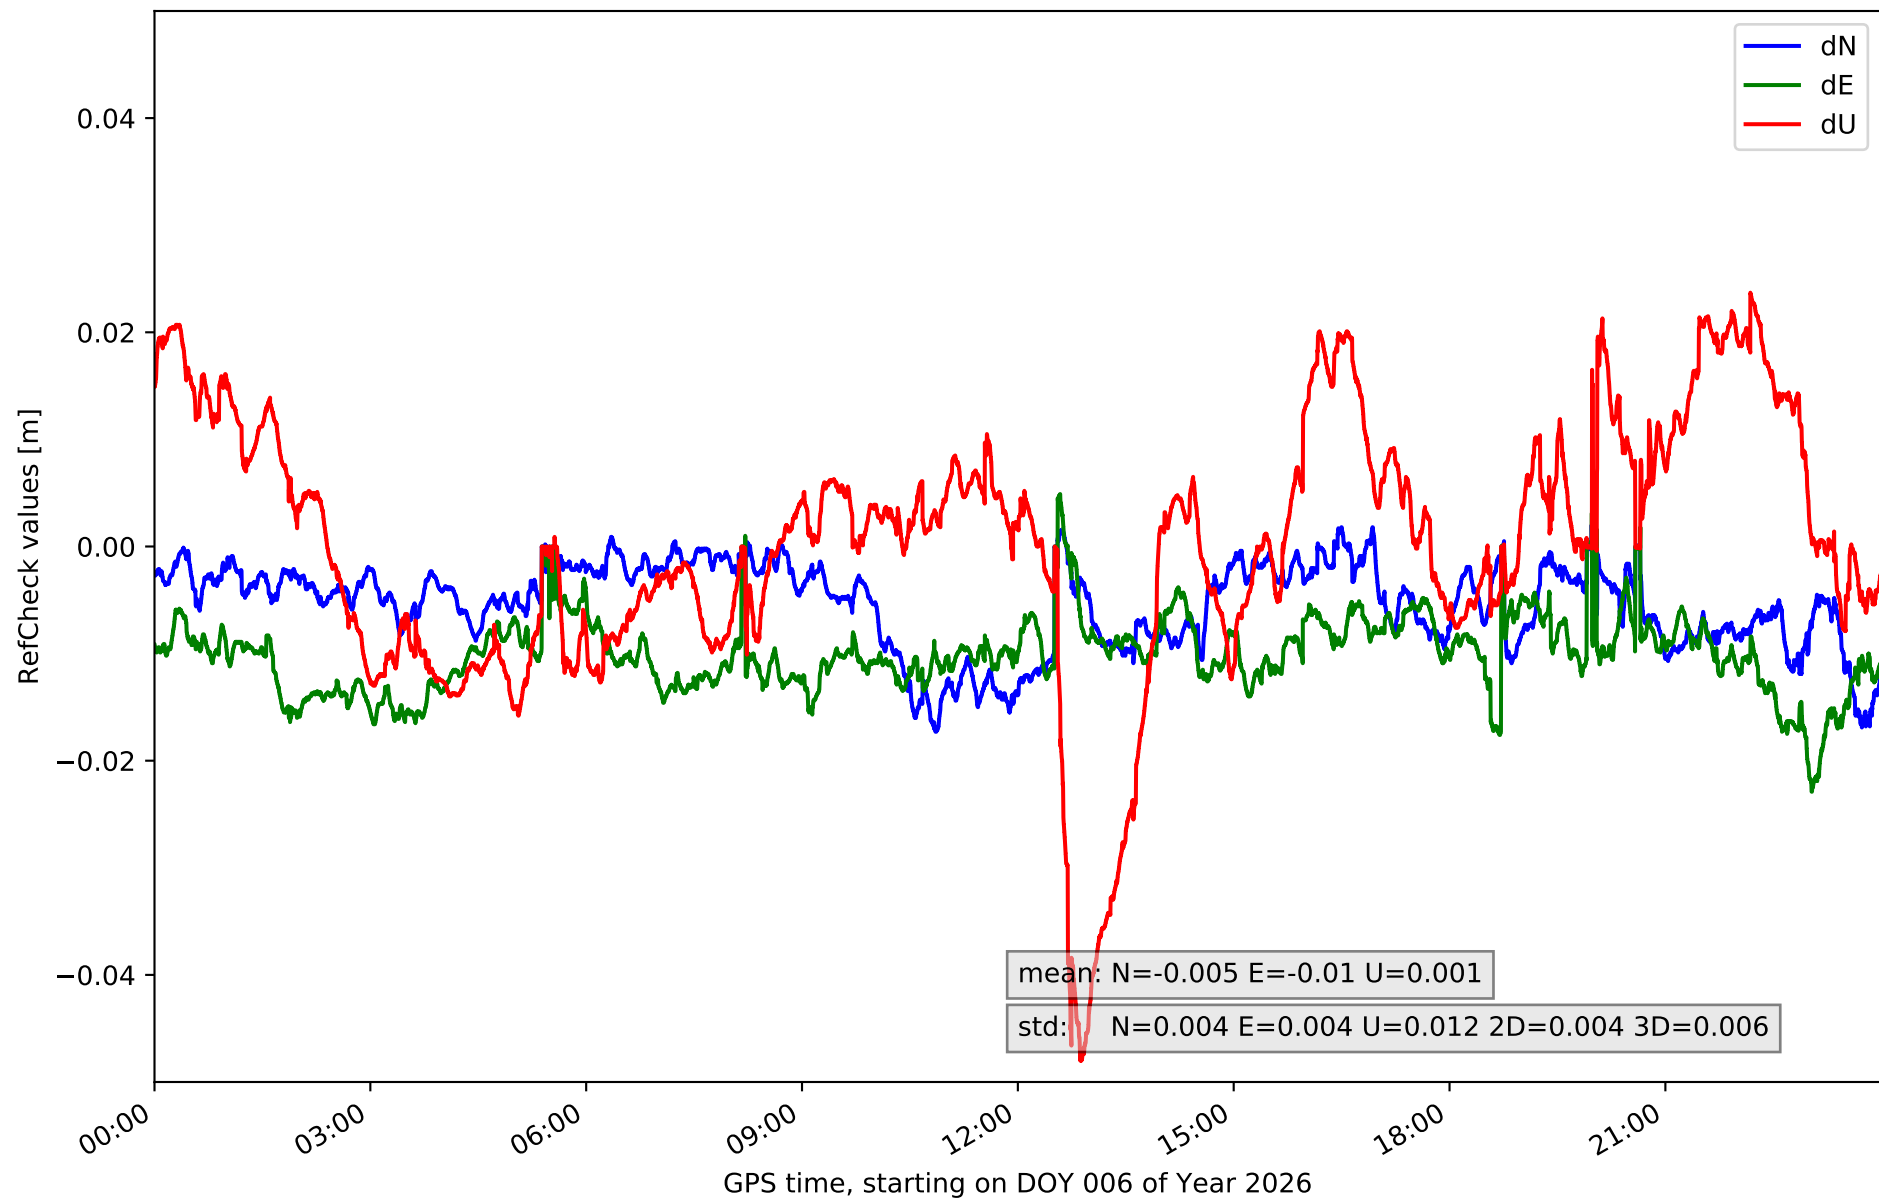


RefCheck for station LP01 in network N32T

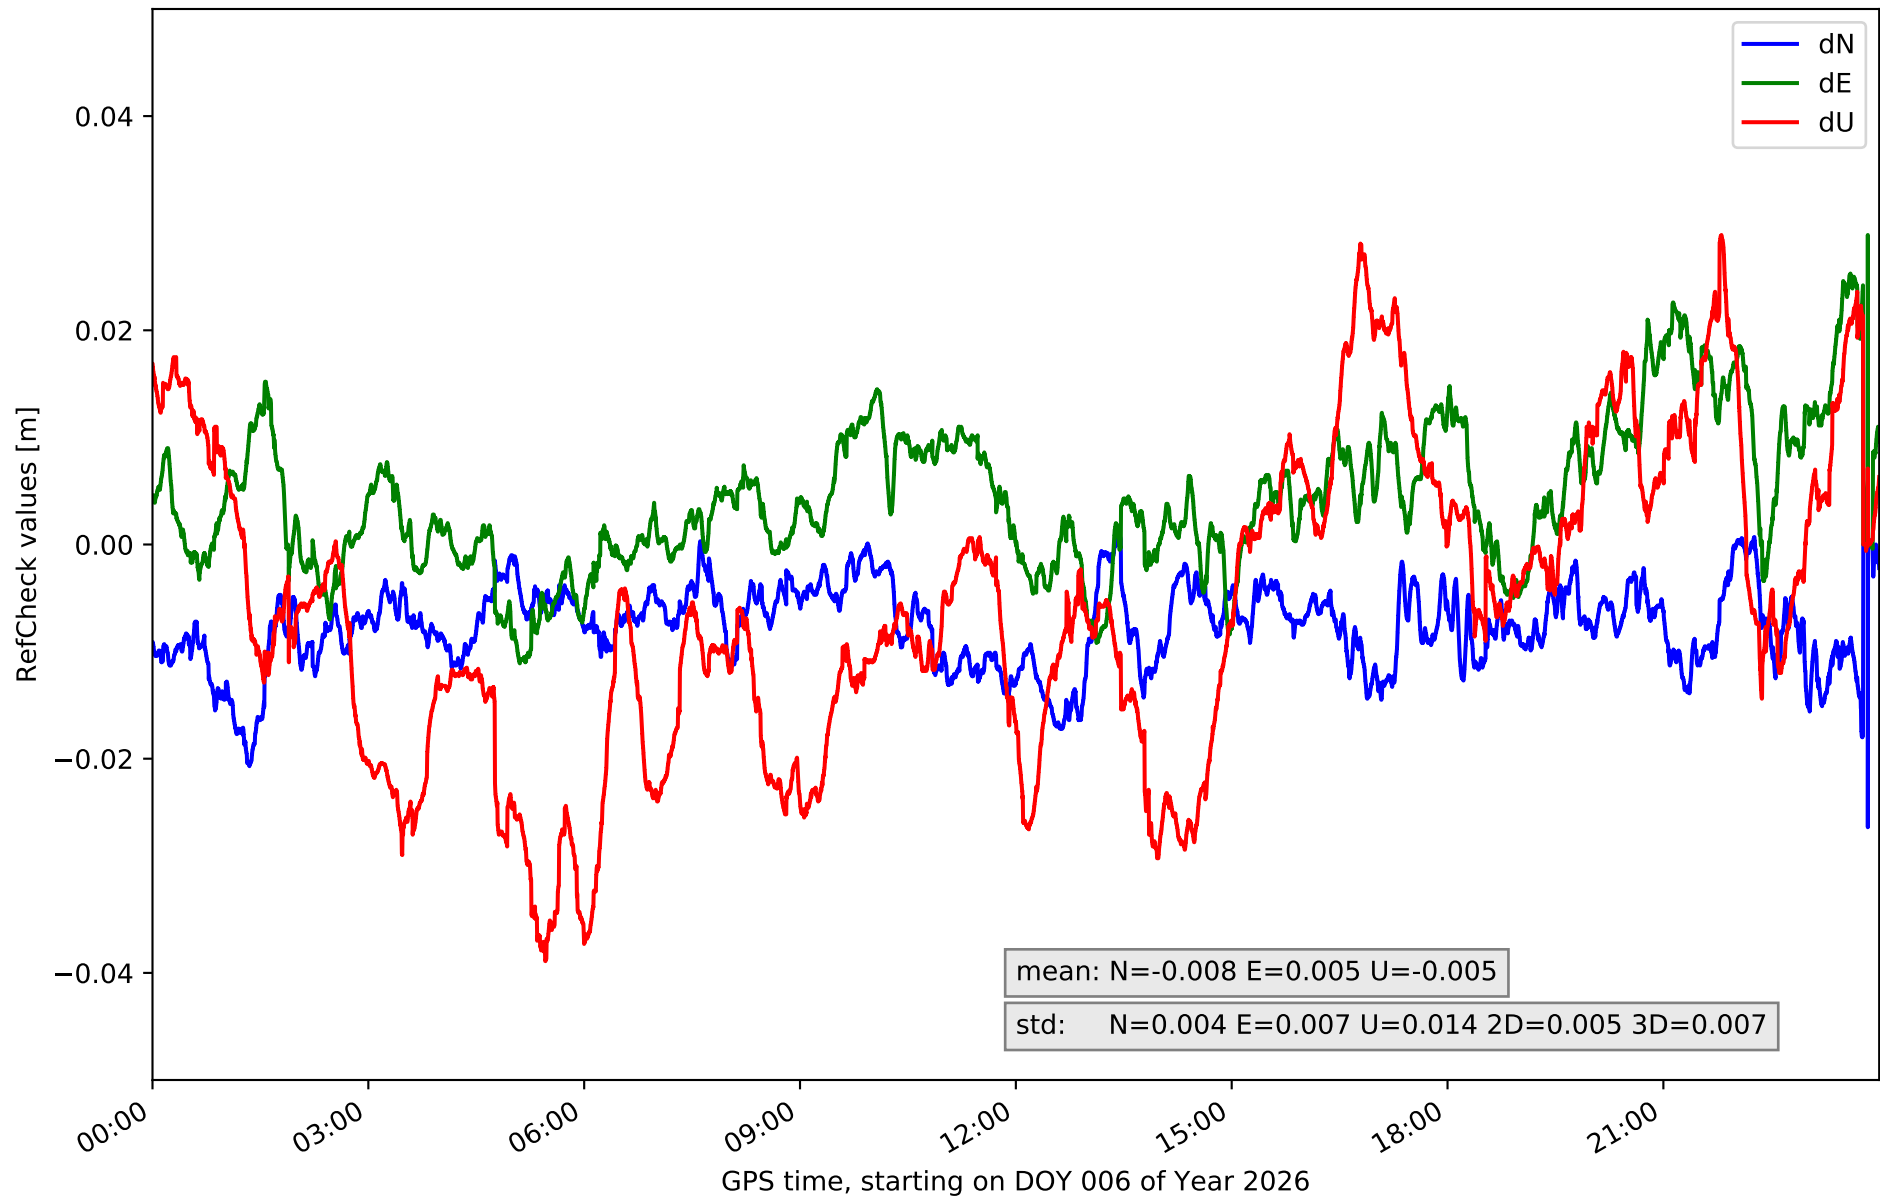


RefCheck for station LP03 in network N32T

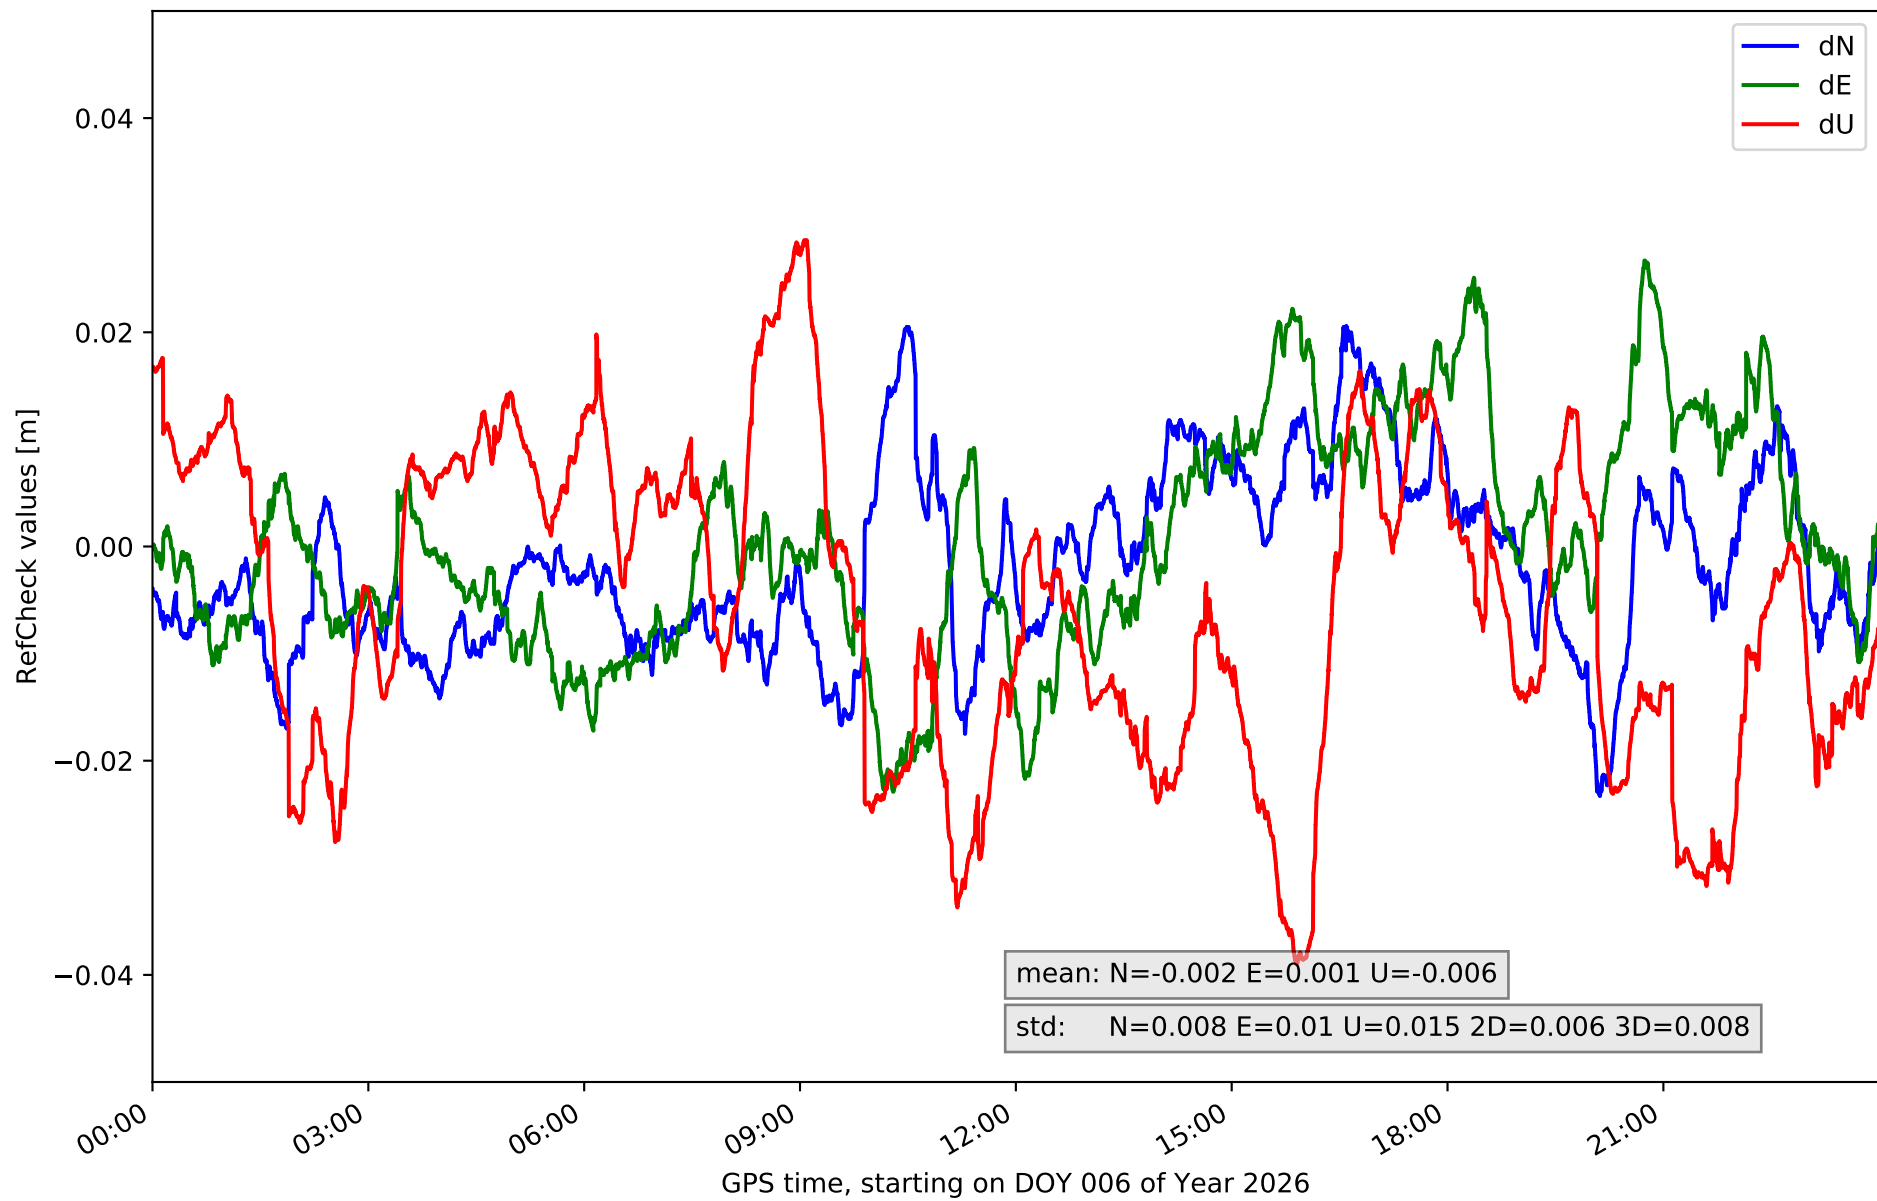


RefCheck for station LPAL in network N32T

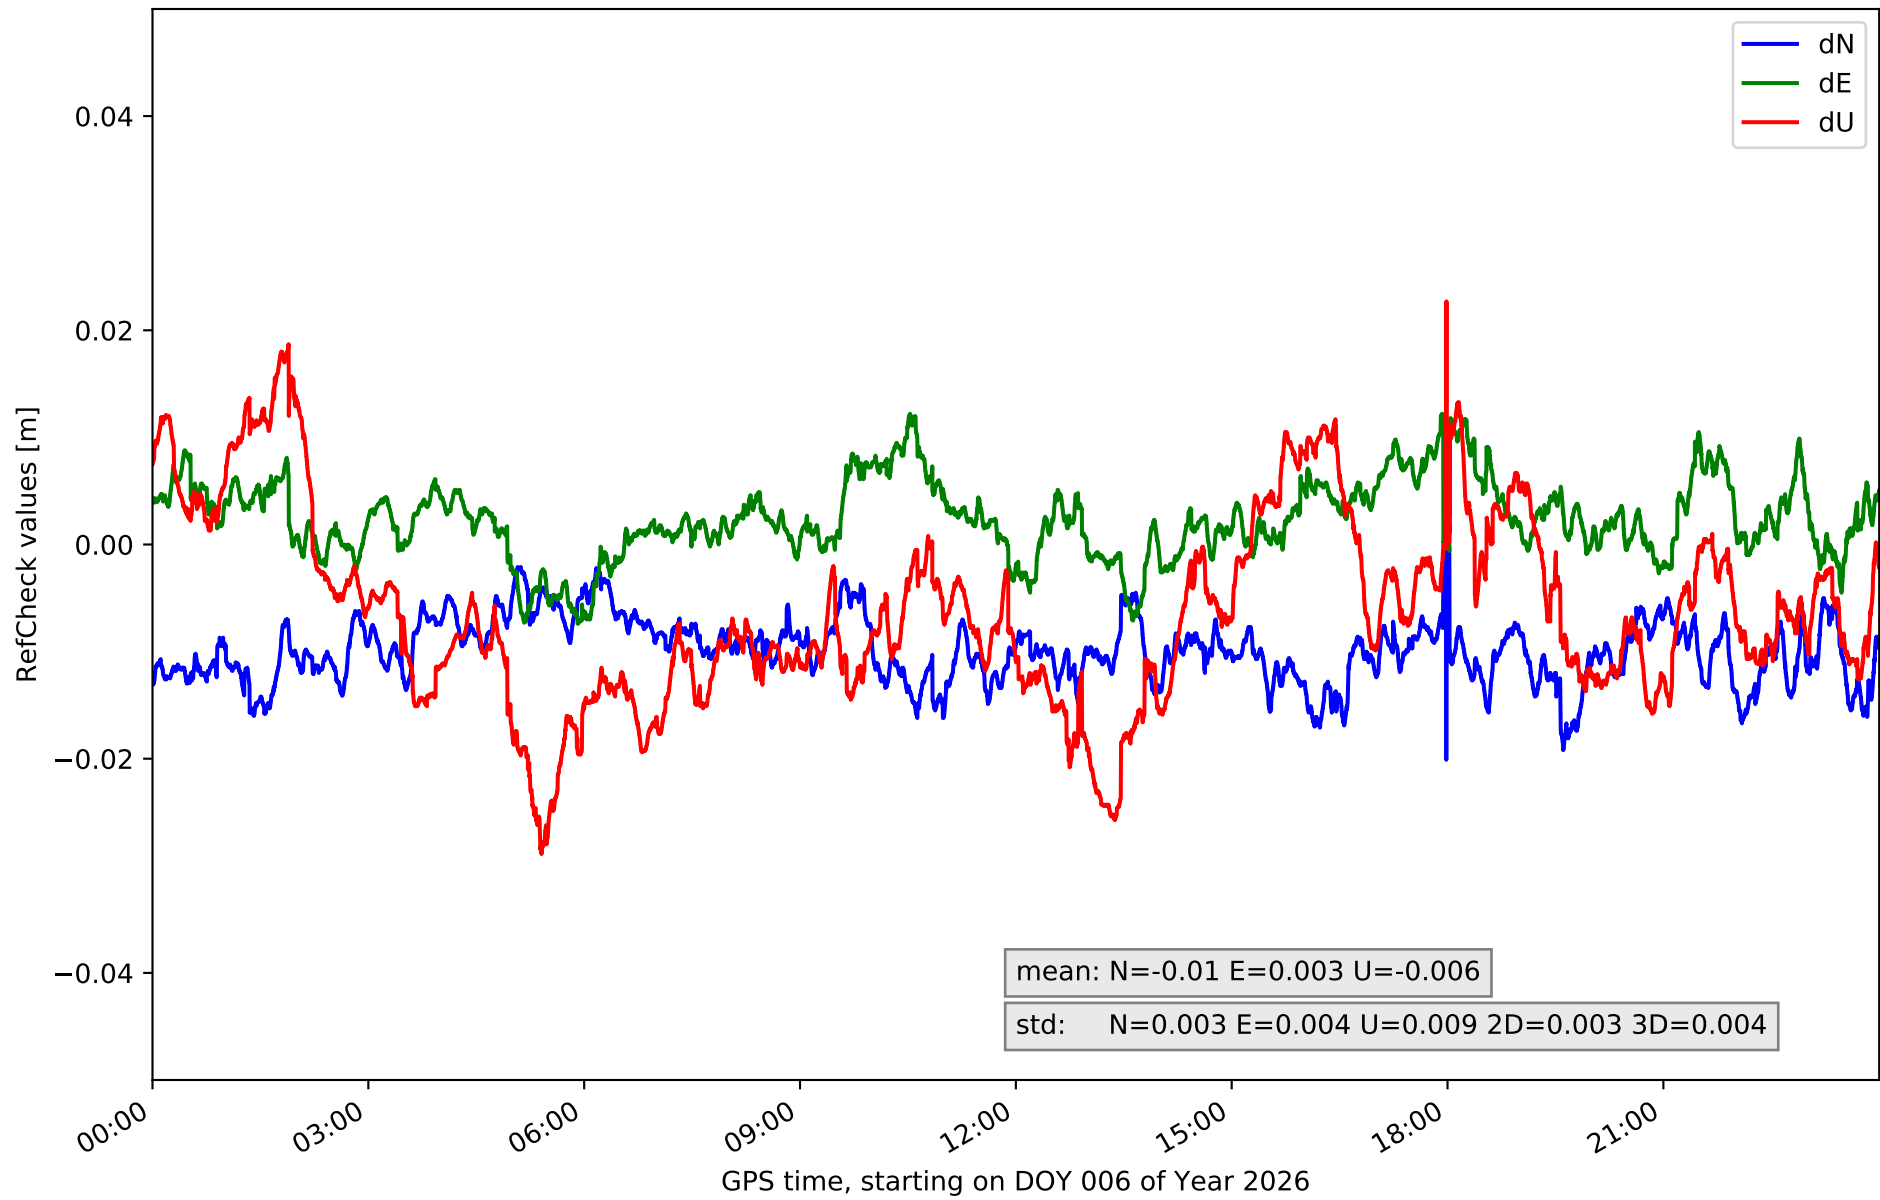


RefCheck for station LRES in network N32T

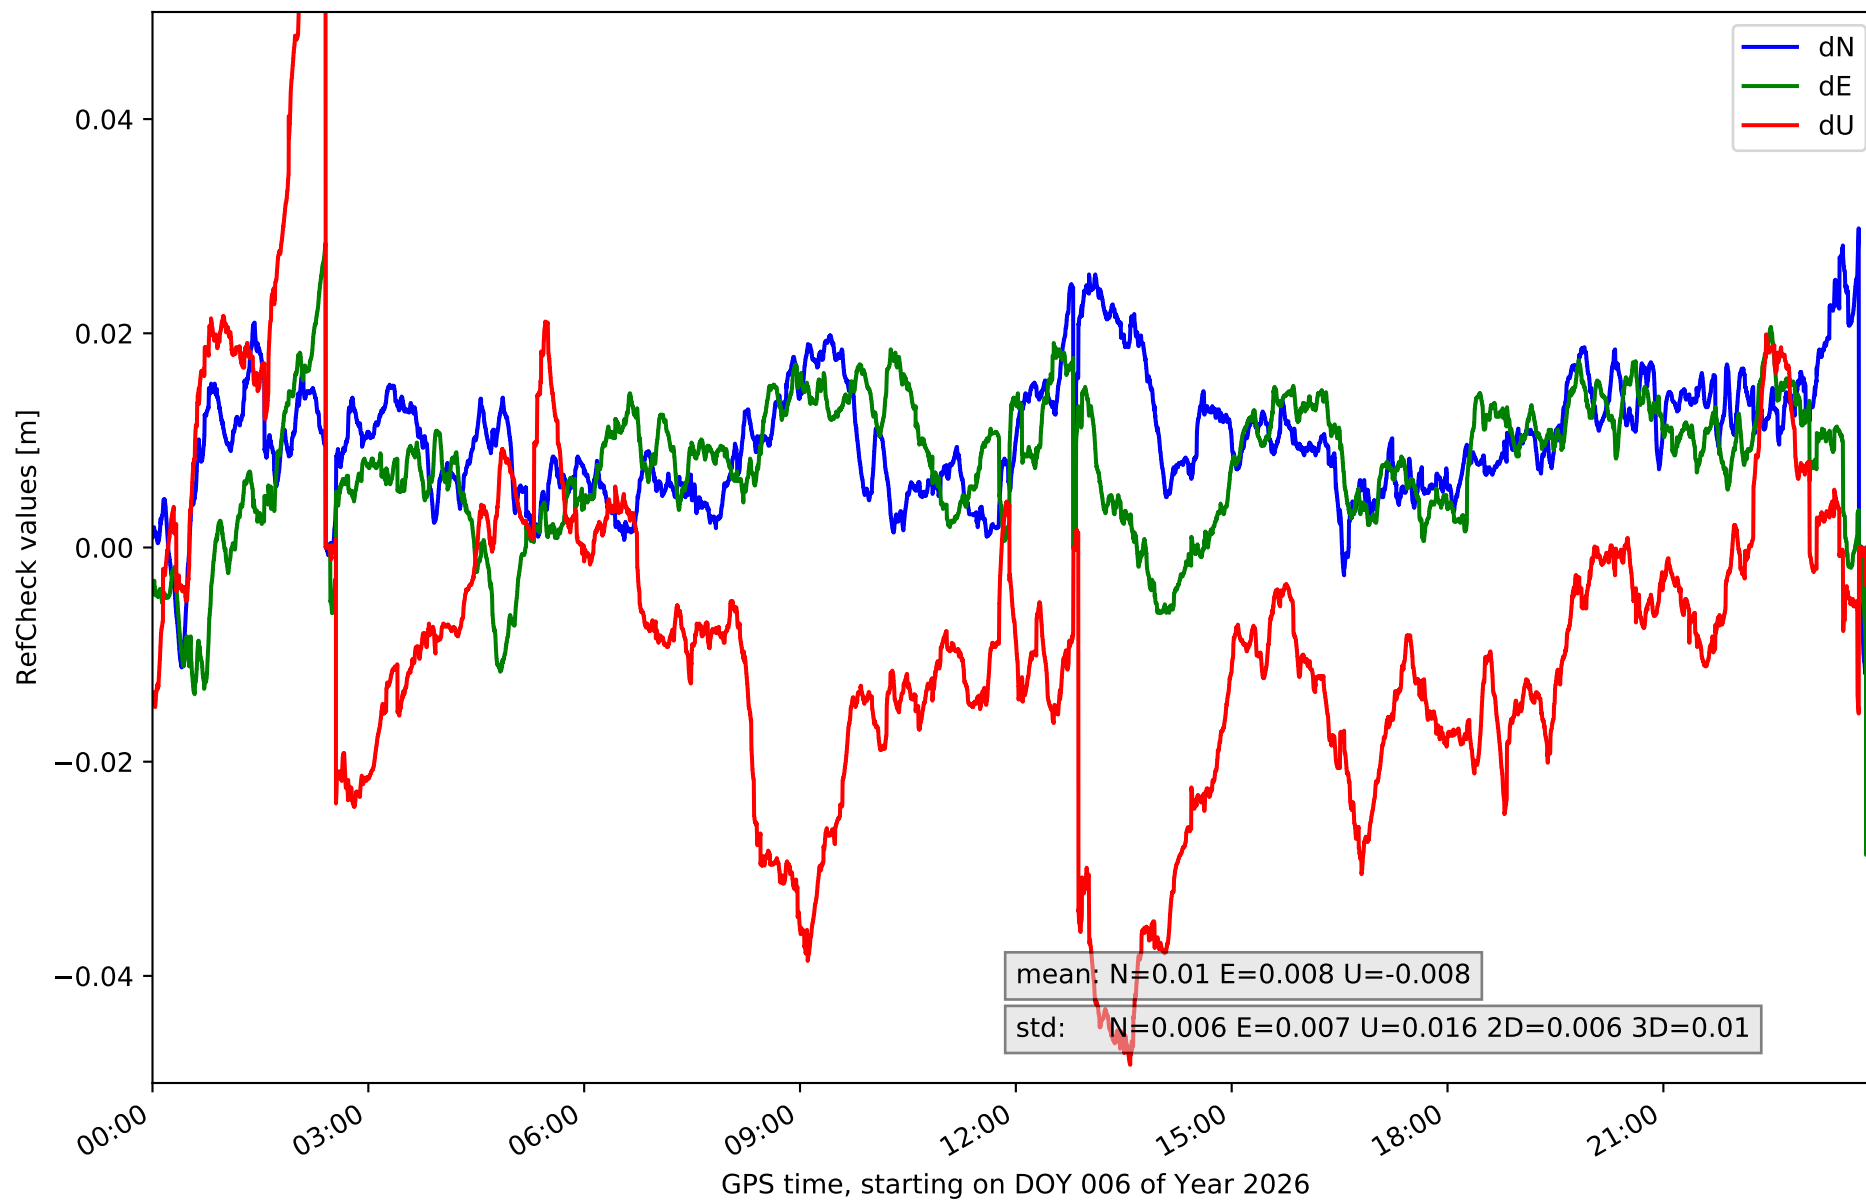


RefCheck for station TN01 in network N32T

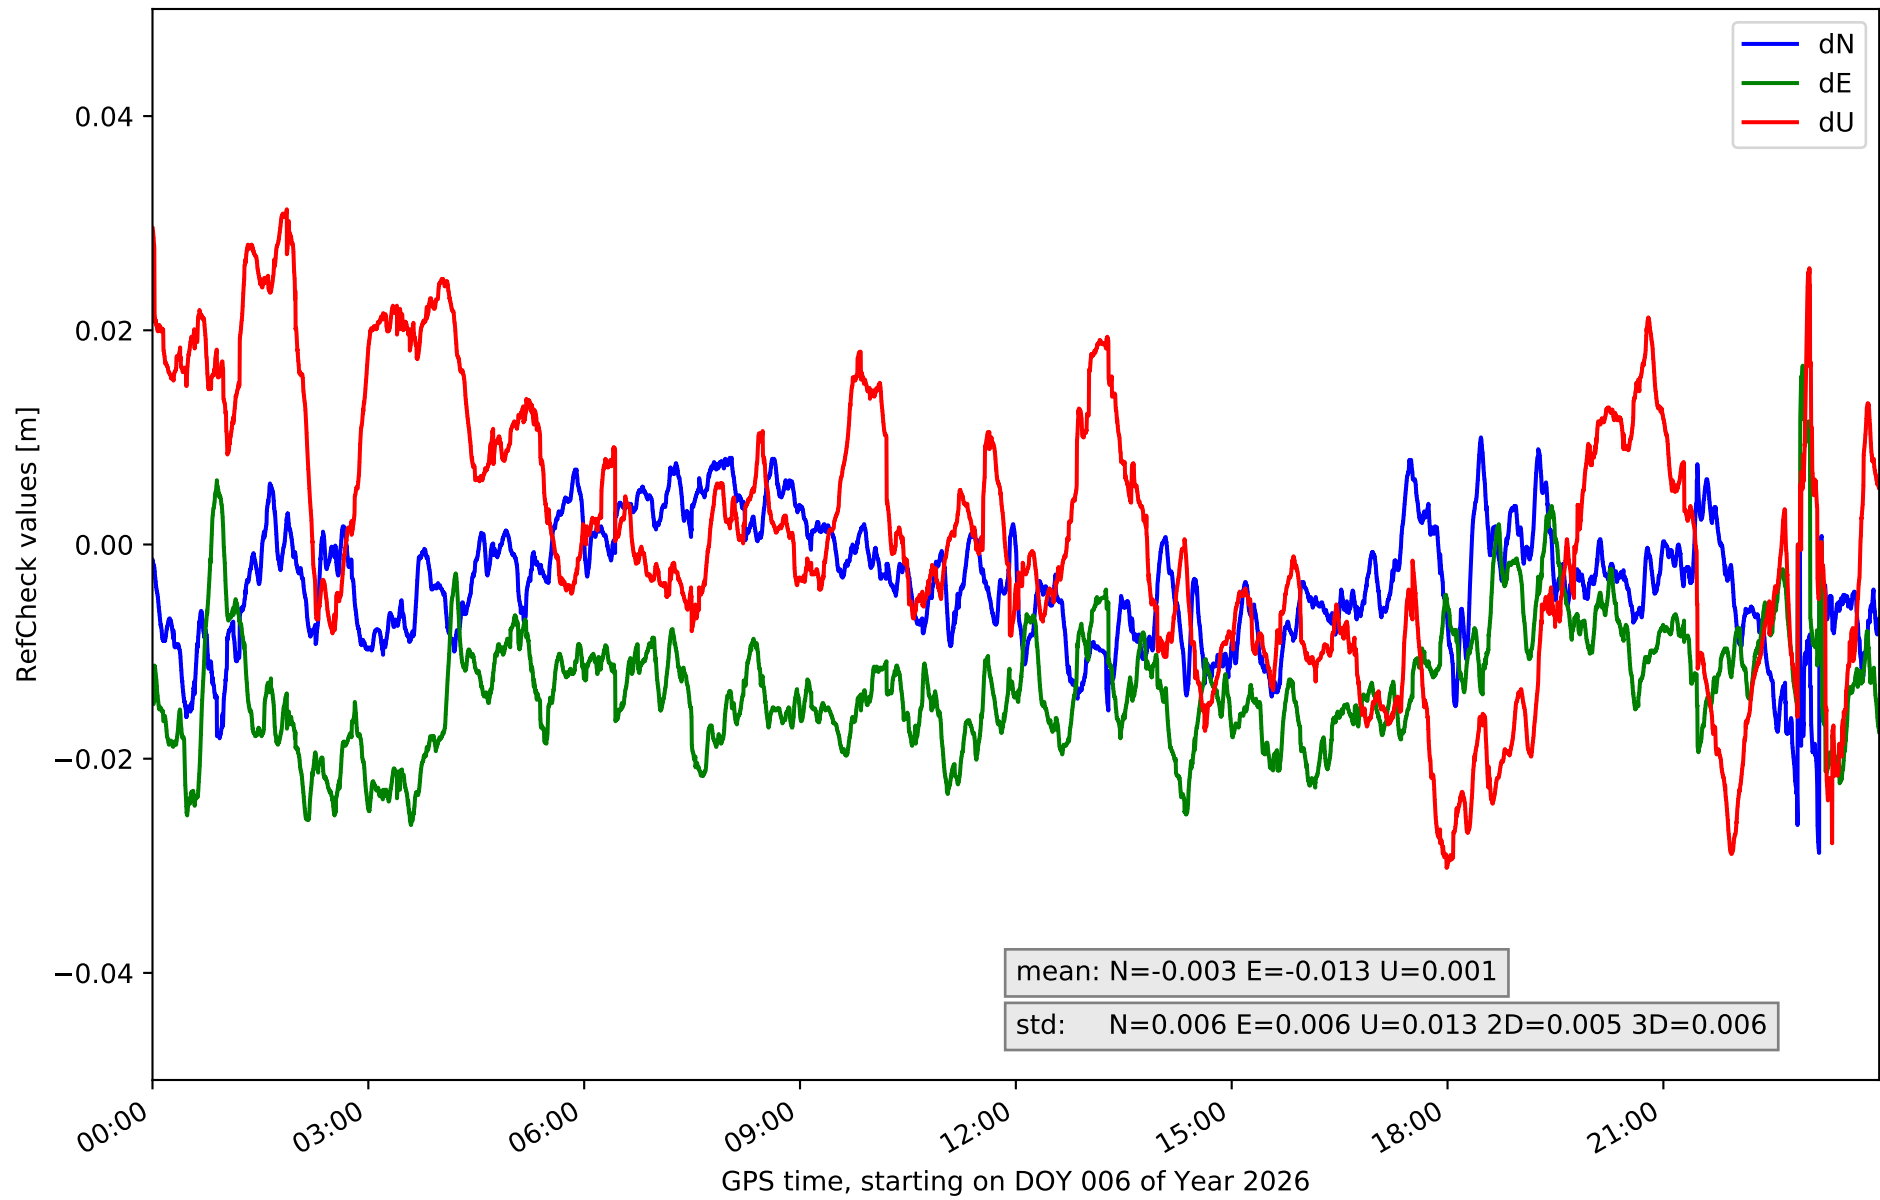


RefCheck for station TN02 in network N32T

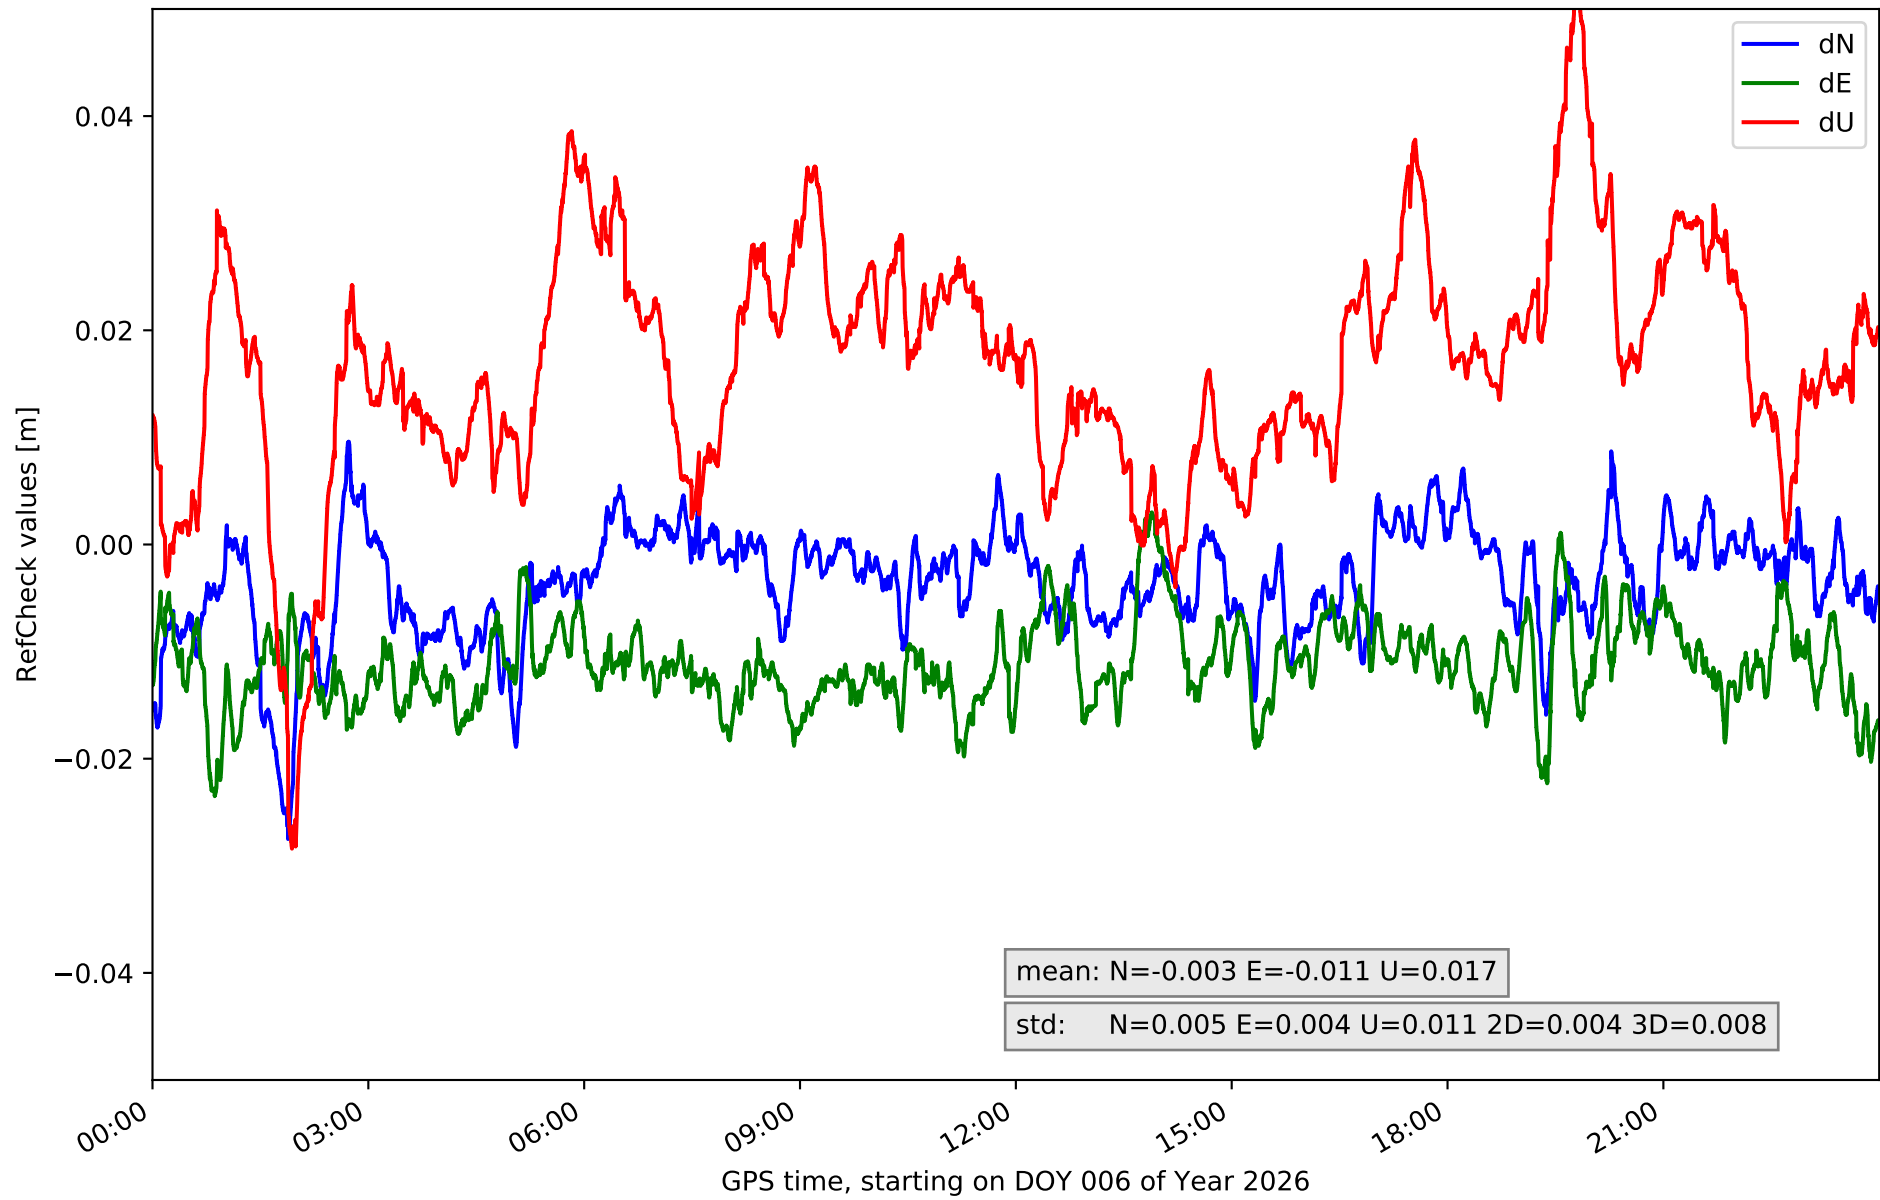


RefCheck for station TN03 in network N32T

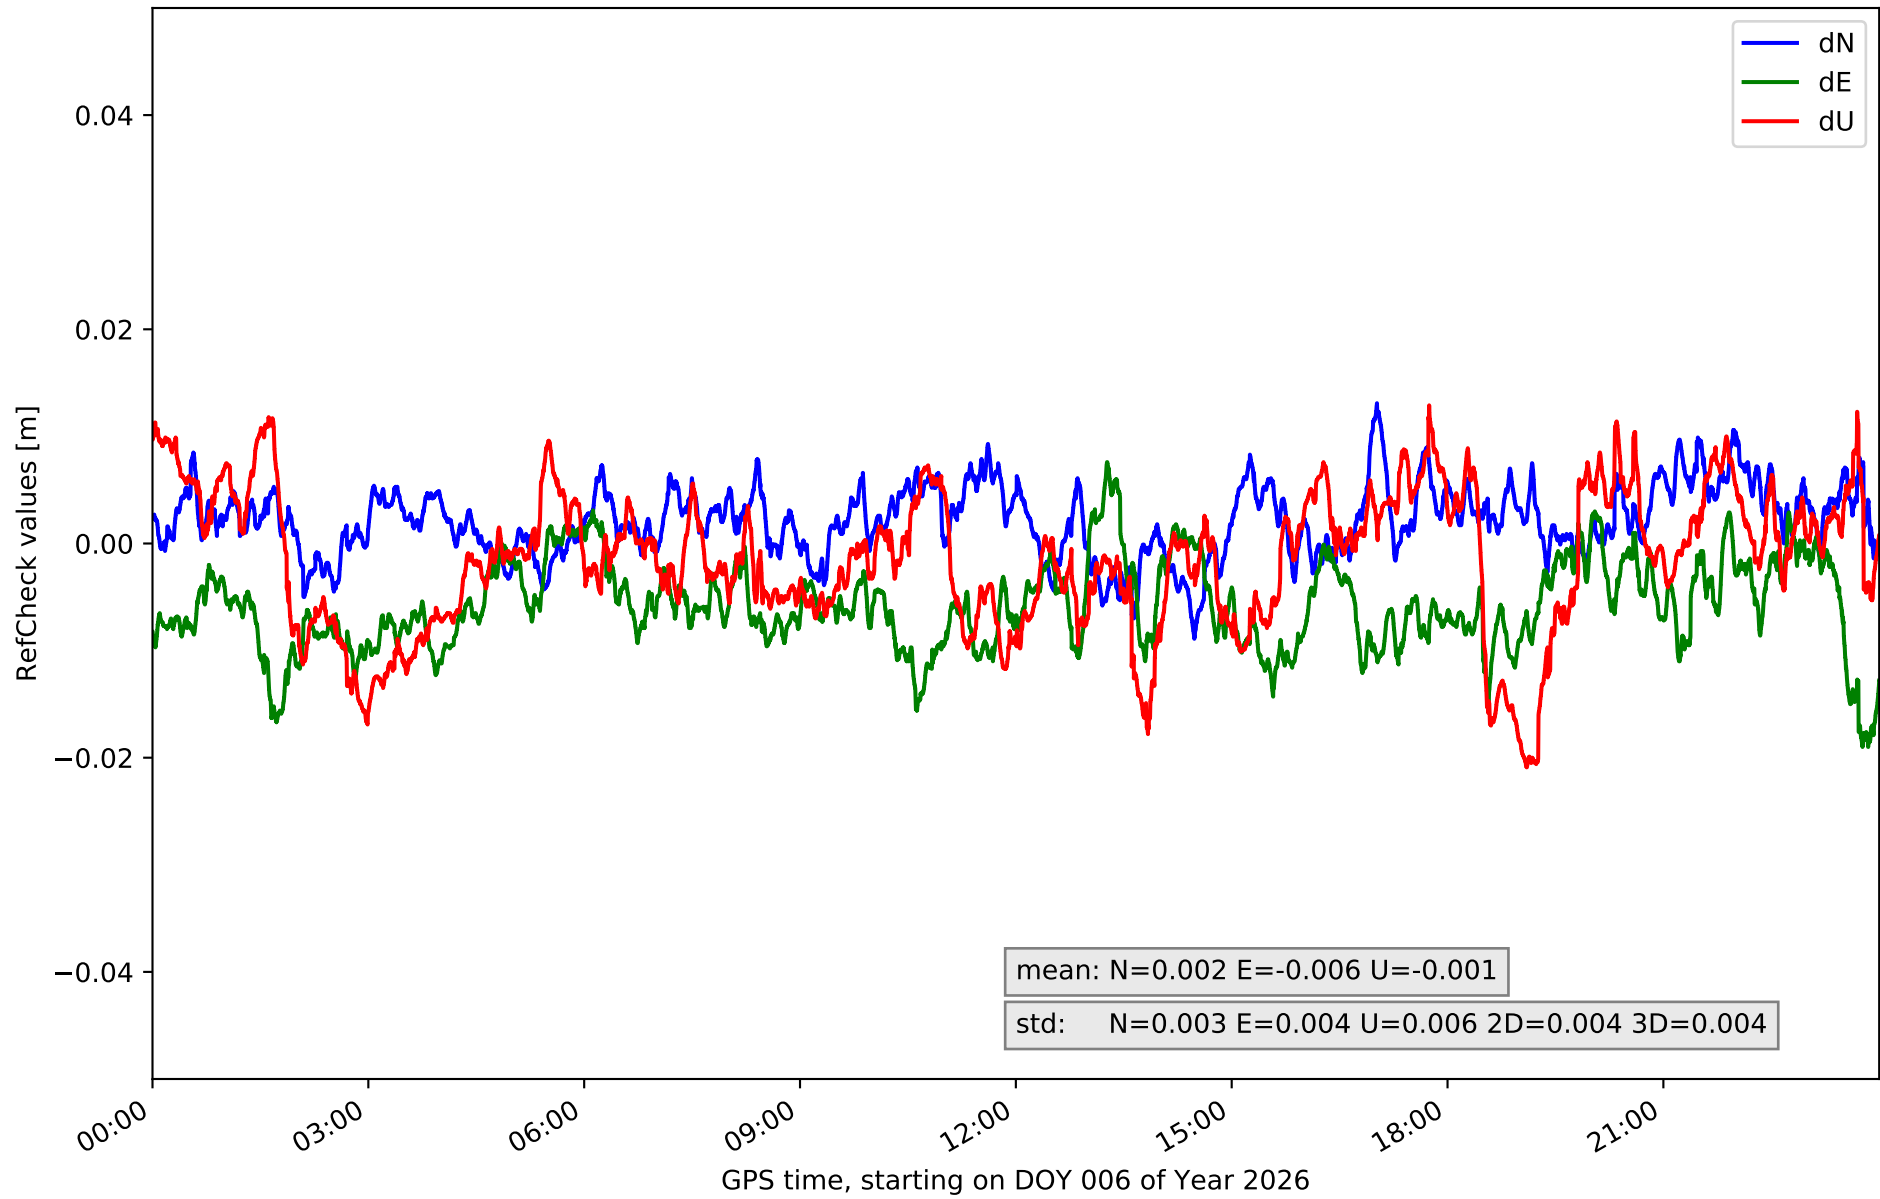


RefCheck for station TN06 in network N32T

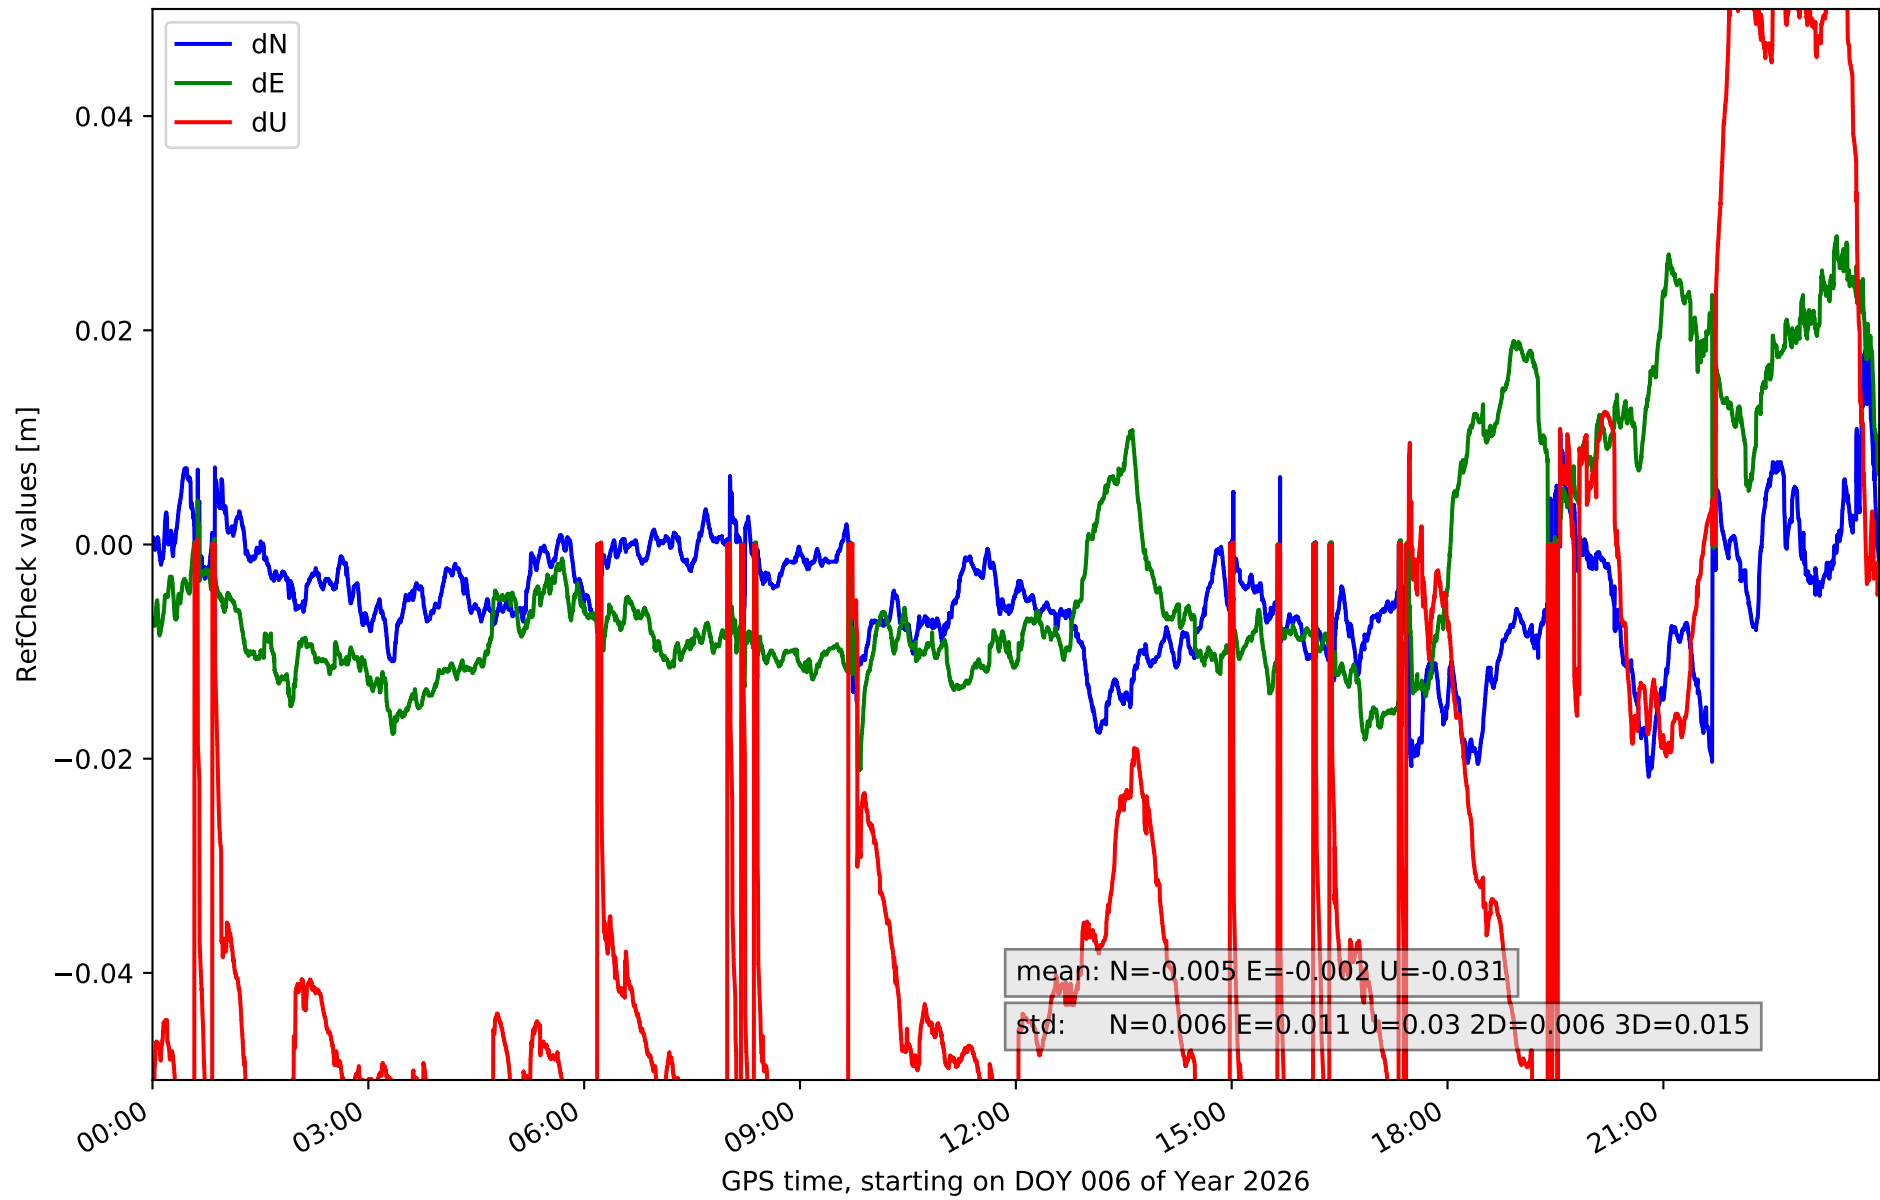

RefCheck for station TN09 in network N32T

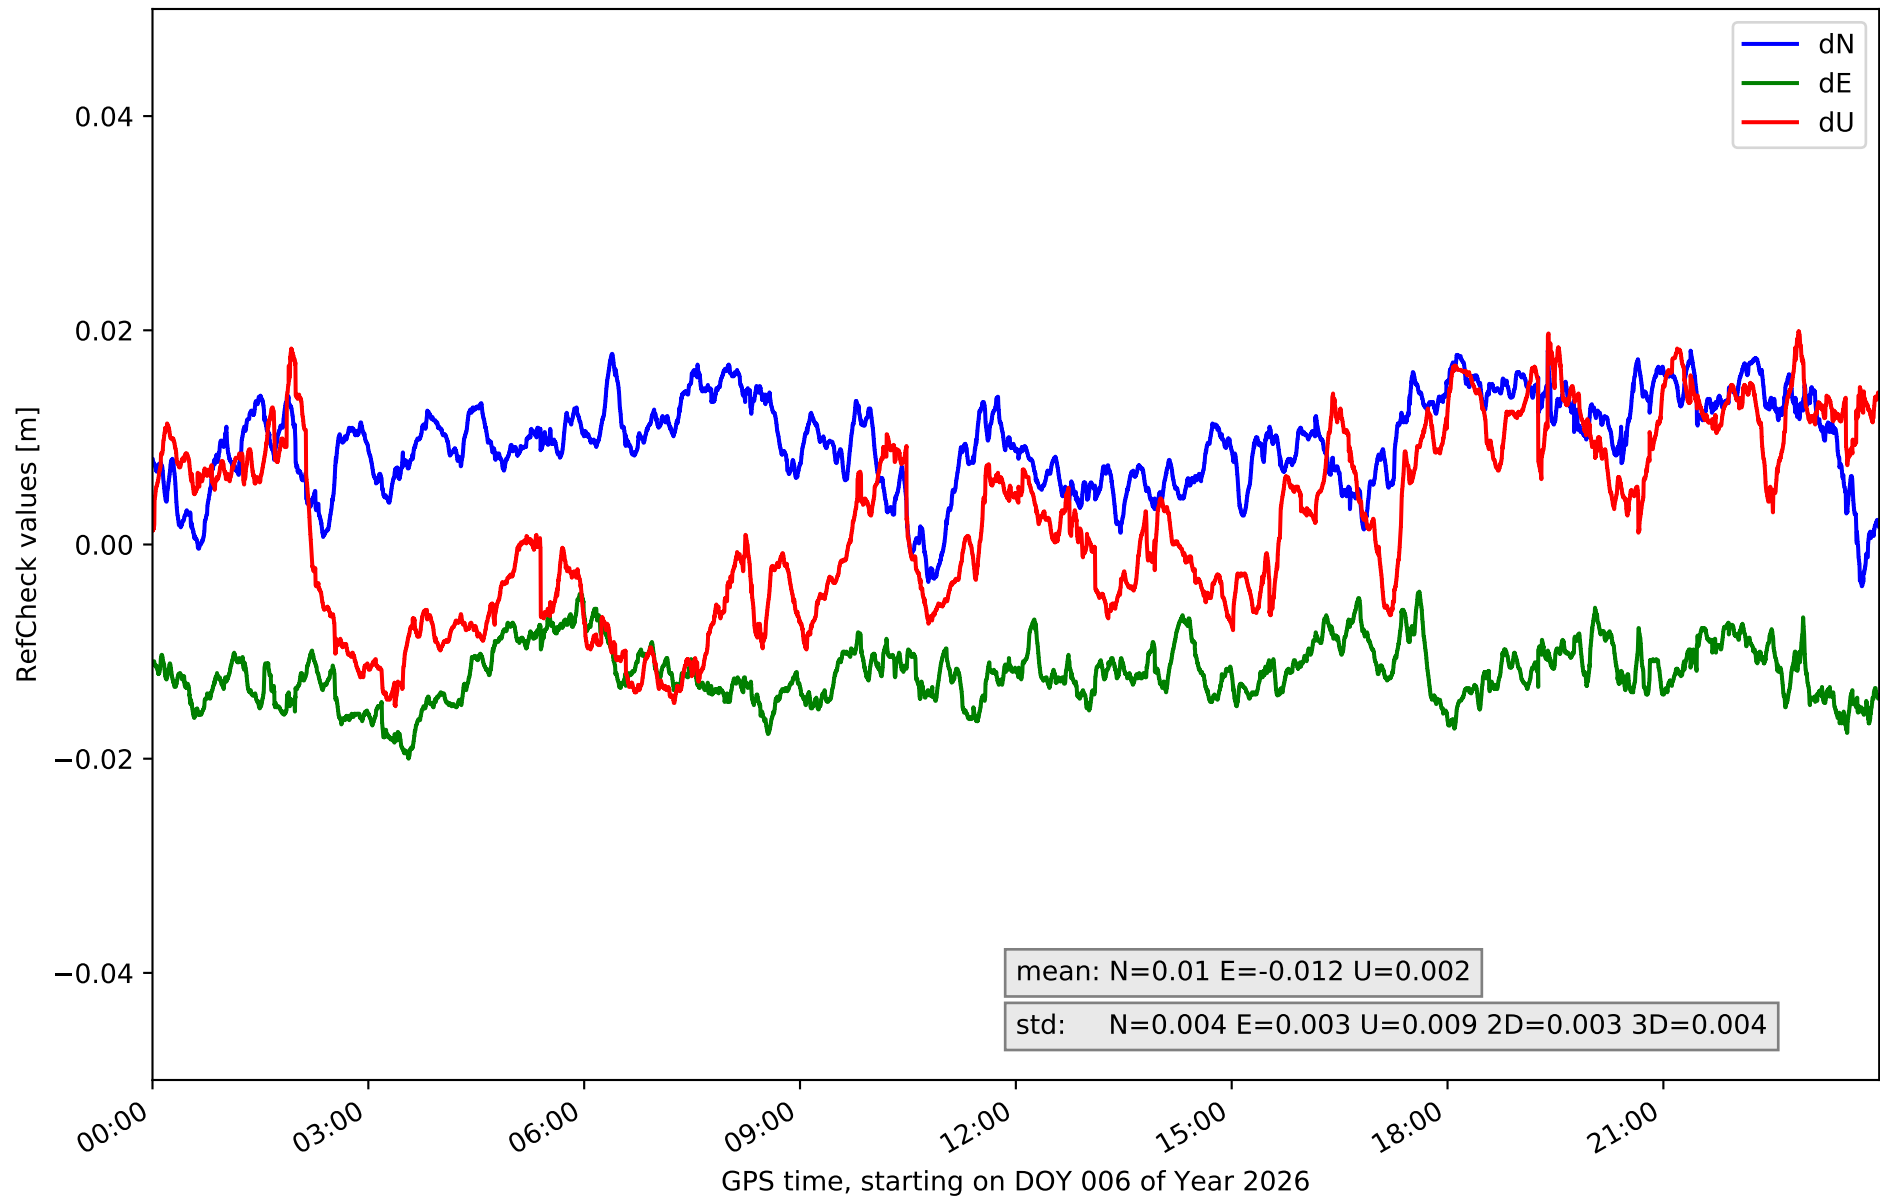

RefCheck for station TE11 in network N32T

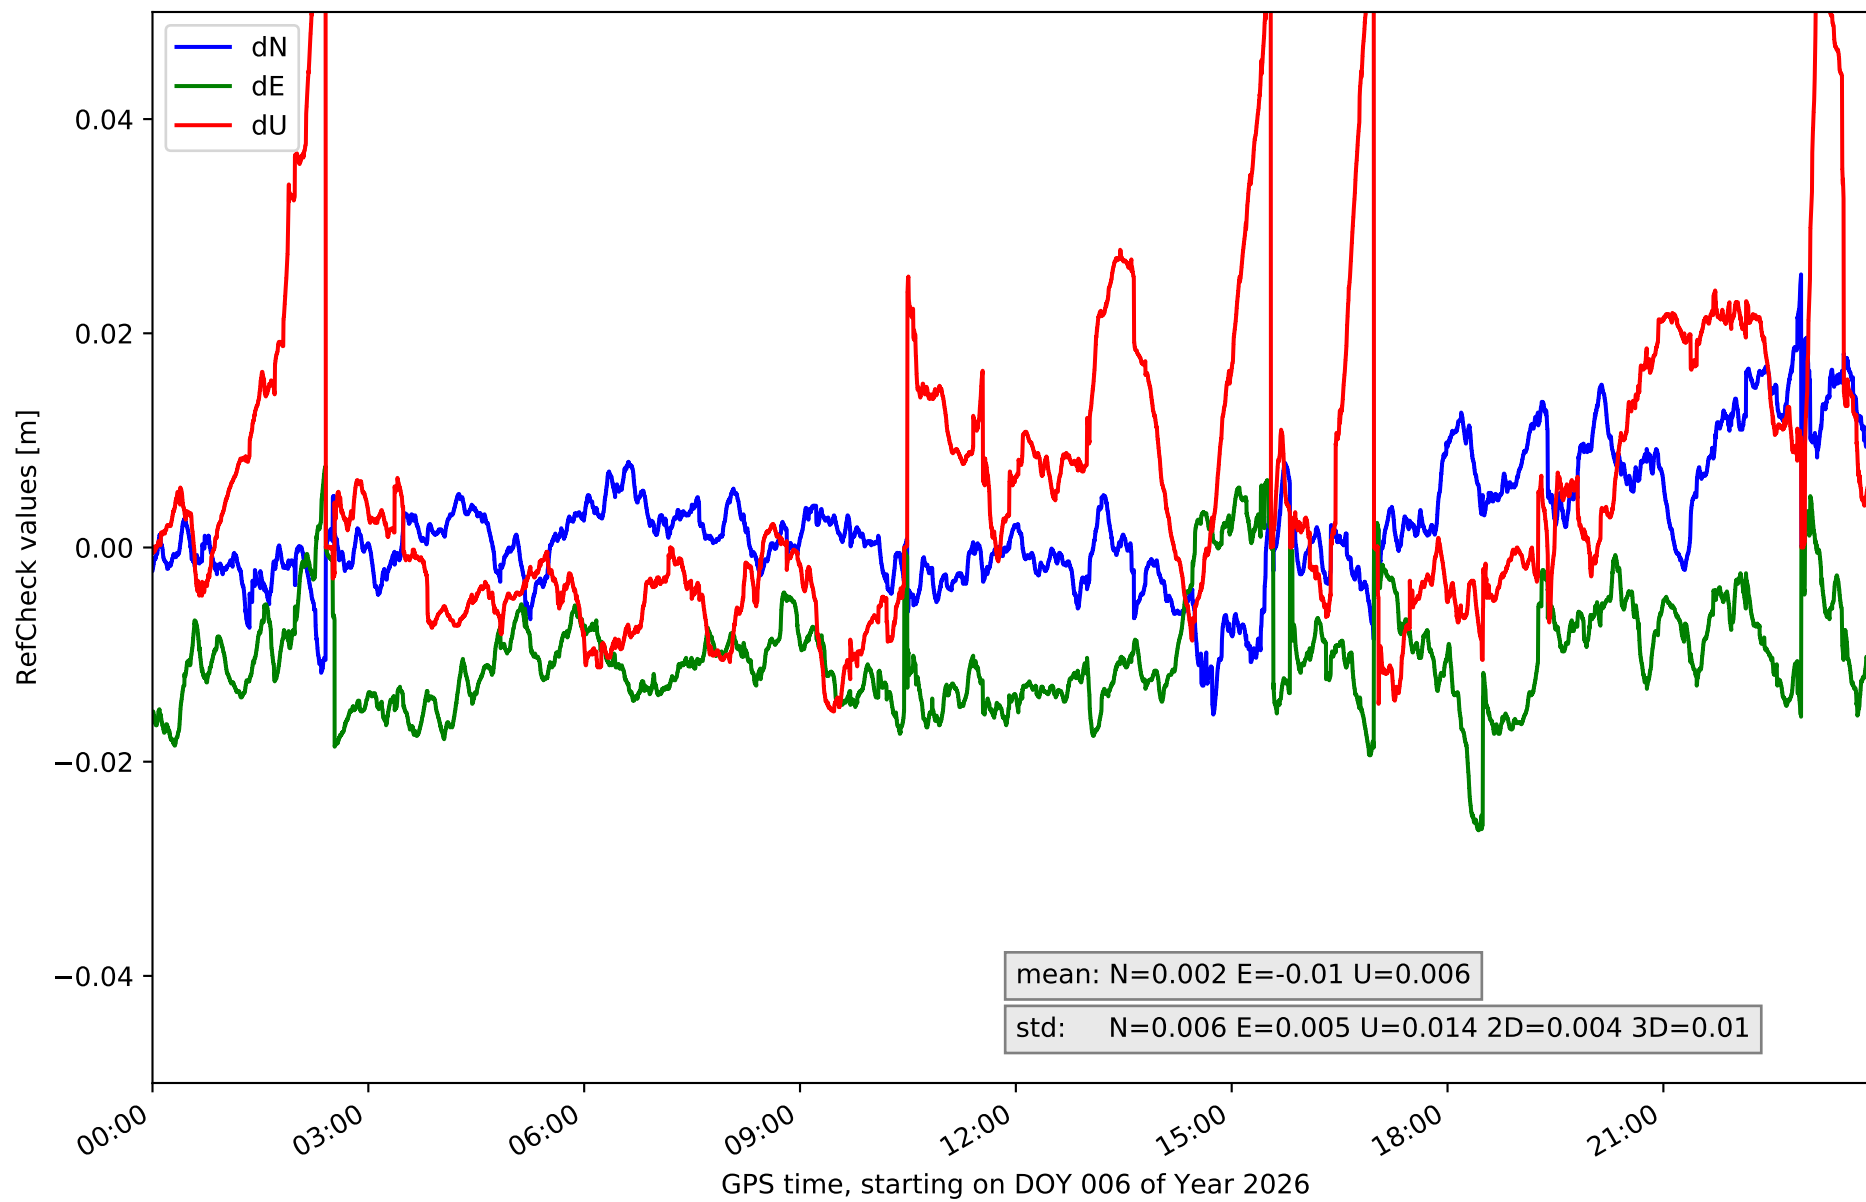

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.007	0.013	0.003	-0.002	0.016	0.003	-0.011	0.03	0.008	0.003	0.005	25456	35.8	9493	13.3
EH02	-0.03	0.036	0.005	-0.012	0.033	0.006	-0.011	0.061	0.017	0.006	0.016	67268	94.6	64628	90.9
GOM1	-0.017	0.006	0.005	-0.029	0.005	0.006	-0.039	0.03	0.011	0.006	0.007	56776	79.8	26977	37.9
GOME	-0.009	0.012	0.004	-0.017	0.015	0.005	-0.045	0.06	0.015	0.003	0.009	11645	16.4	13103	18.4
IZAN	-0.017	0.002	0.004	-0.023	0.005	0.004	-0.048	0.024	0.012	0.004	0.006	50130	70.5	12278	17.3
LP01	-0.026	0.003	0.004	-0.011	0.029	0.007	-0.039	0.029	0.014	0.005	0.007	35543	50.0	24259	34.1
LP03	-0.023	0.021	0.008	-0.023	0.027	0.01	-0.039	0.029	0.015	0.006	0.008	42664	60.0	28035	39.4
LPAL	-0.02	-0.0	0.003	-0.007	0.012	0.004	-0.029	0.023	0.009	0.003	0.004	44187	62.1	6129	8.6
LRES	-0.023	0.03	0.006	-0.029	0.028	0.007	-0.048	0.058	0.016	0.006	0.01	53186	74.8	35475	49.9
TN01	-0.029	0.01	0.006	-0.026	0.017	0.006	-0.03	0.031	0.013	0.005	0.006	61178	86.0	31690	44.5
TN02	-0.028	0.01	0.005	-0.024	0.003	0.004	-0.028	0.055	0.011	0.004	0.008	54090	76.0	46843	65.8
TN03	-0.009	0.013	0.003	-0.019	0.008	0.004	-0.021	0.013	0.006	0.004	0.004	15112	21.2	1500	2.1
TN06	-0.022	0.02	0.006	-0.021	0.029	0.011	-0.061	0.057	0.03	0.006	0.015	50160	70.5	63614	89.4
TN09	-0.004	0.018	0.004	-0.02	-0.004	0.003	-0.015	0.02	0.009	0.003	0.004	69271	97.4	24730	34.8
TE11	-0.016	0.025	0.006	-0.026	0.008	0.005	-0.015	0.061	0.014	0.004	0.01	51078	71.8	19113	26.9
Mean	-0.019	0.015	0.005	-0.019	0.015	0.006	-0.032	0.039	0.013	0.005	0.008	45849.6	64.5	27191.1	38.2
Min/Max	-0.03	0.036	0.008	-0.029	0.033	0.011	-0.061	0.061	0.03	0.006	0.016	69271	97.4	64628	90.9

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	89.1	91.9	87.2	89.3	87.5
considering satellites with dual-frequency fixed	85.2	88.0	79.8	86.1	84.1
considering all signals separately	85.2	87.8	79.8	86.6	82.0