

summary for network N32T

timeperiod chosen: from 2026-03-01-00:00:00 until 2026-03-01-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.5 seconds


average fixing percentage with threshold set to 0.3: 88.6 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: TRM59900.00	SCIS	receiver: LEICA GR50	height: 85.364
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

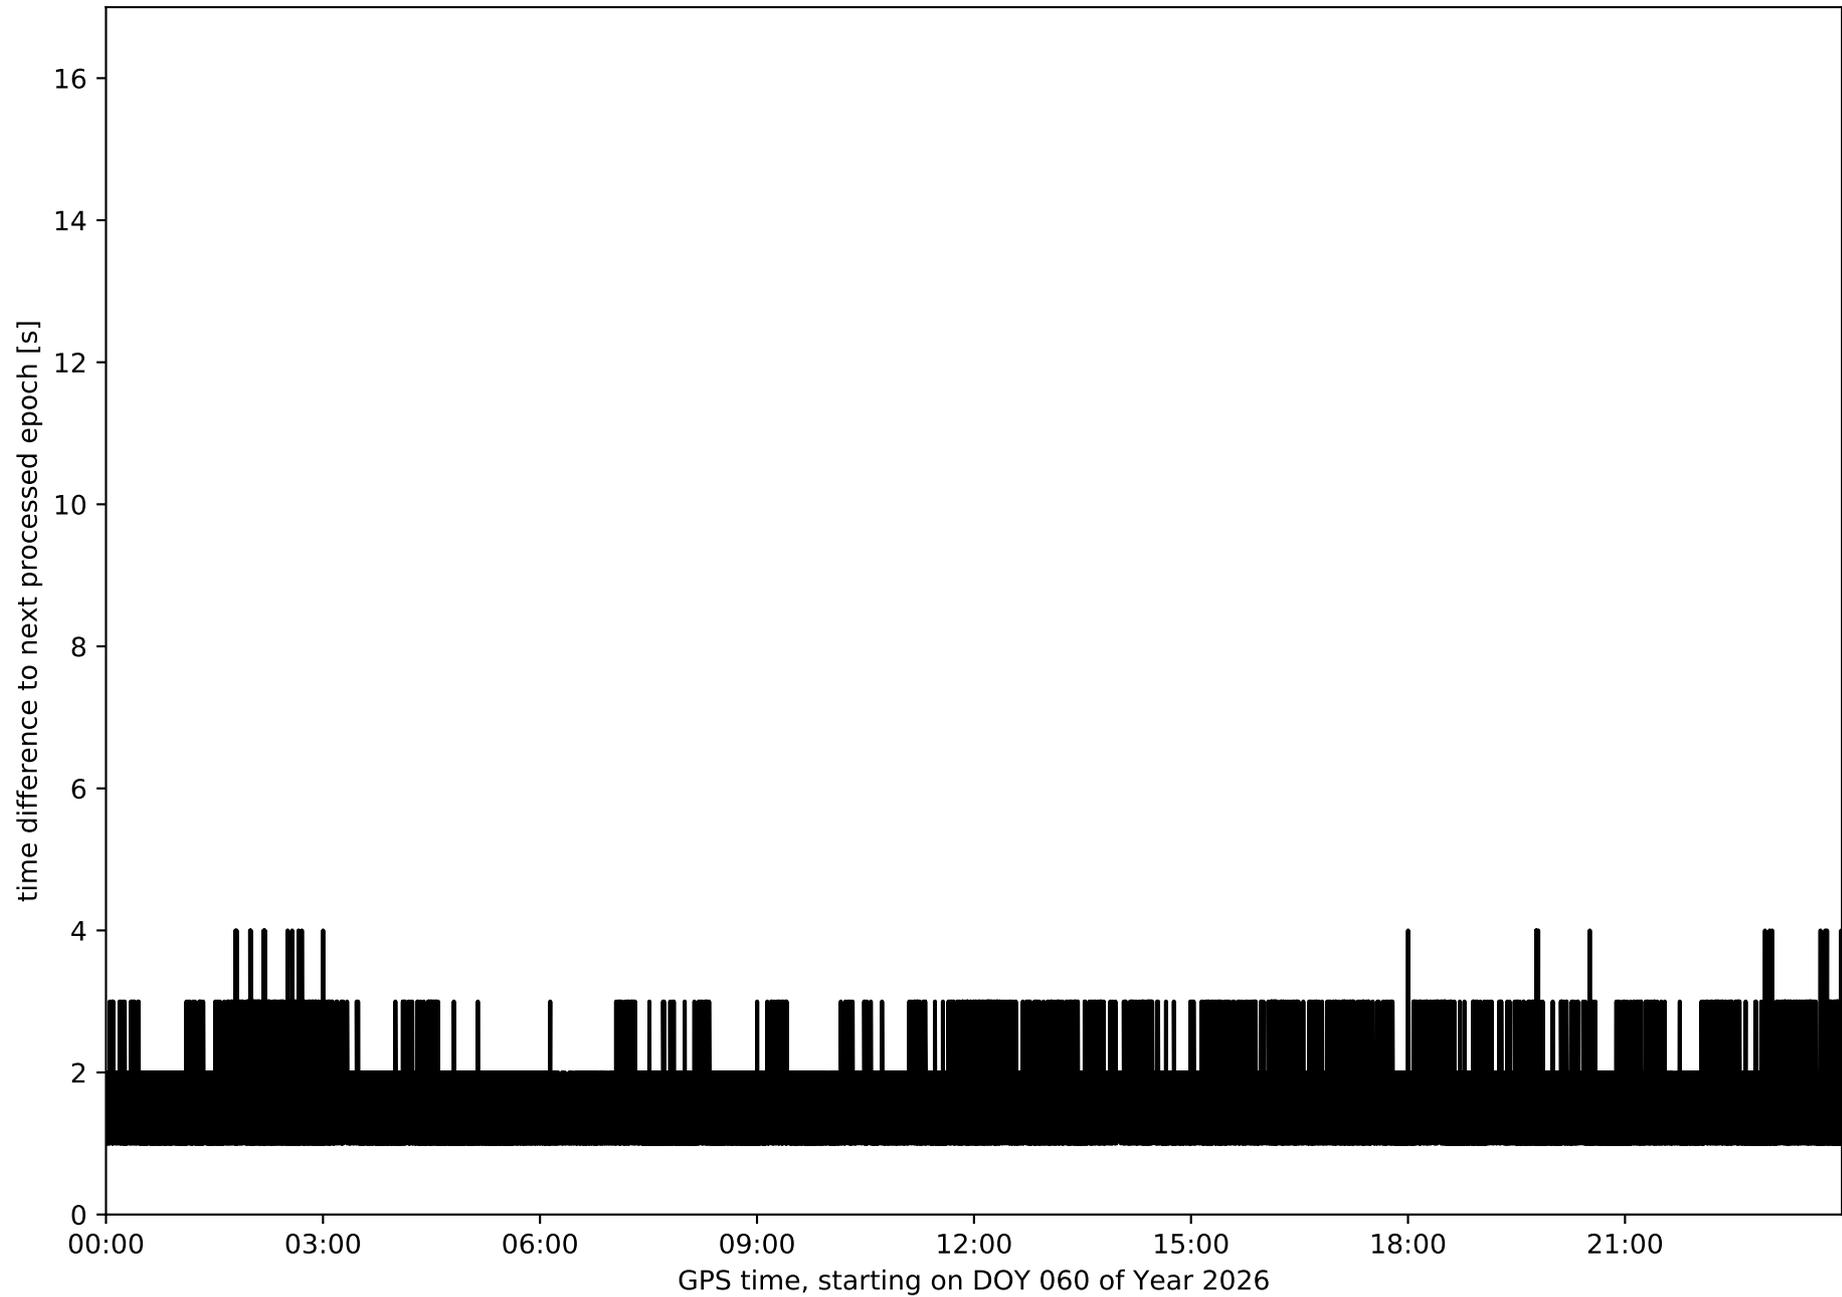


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

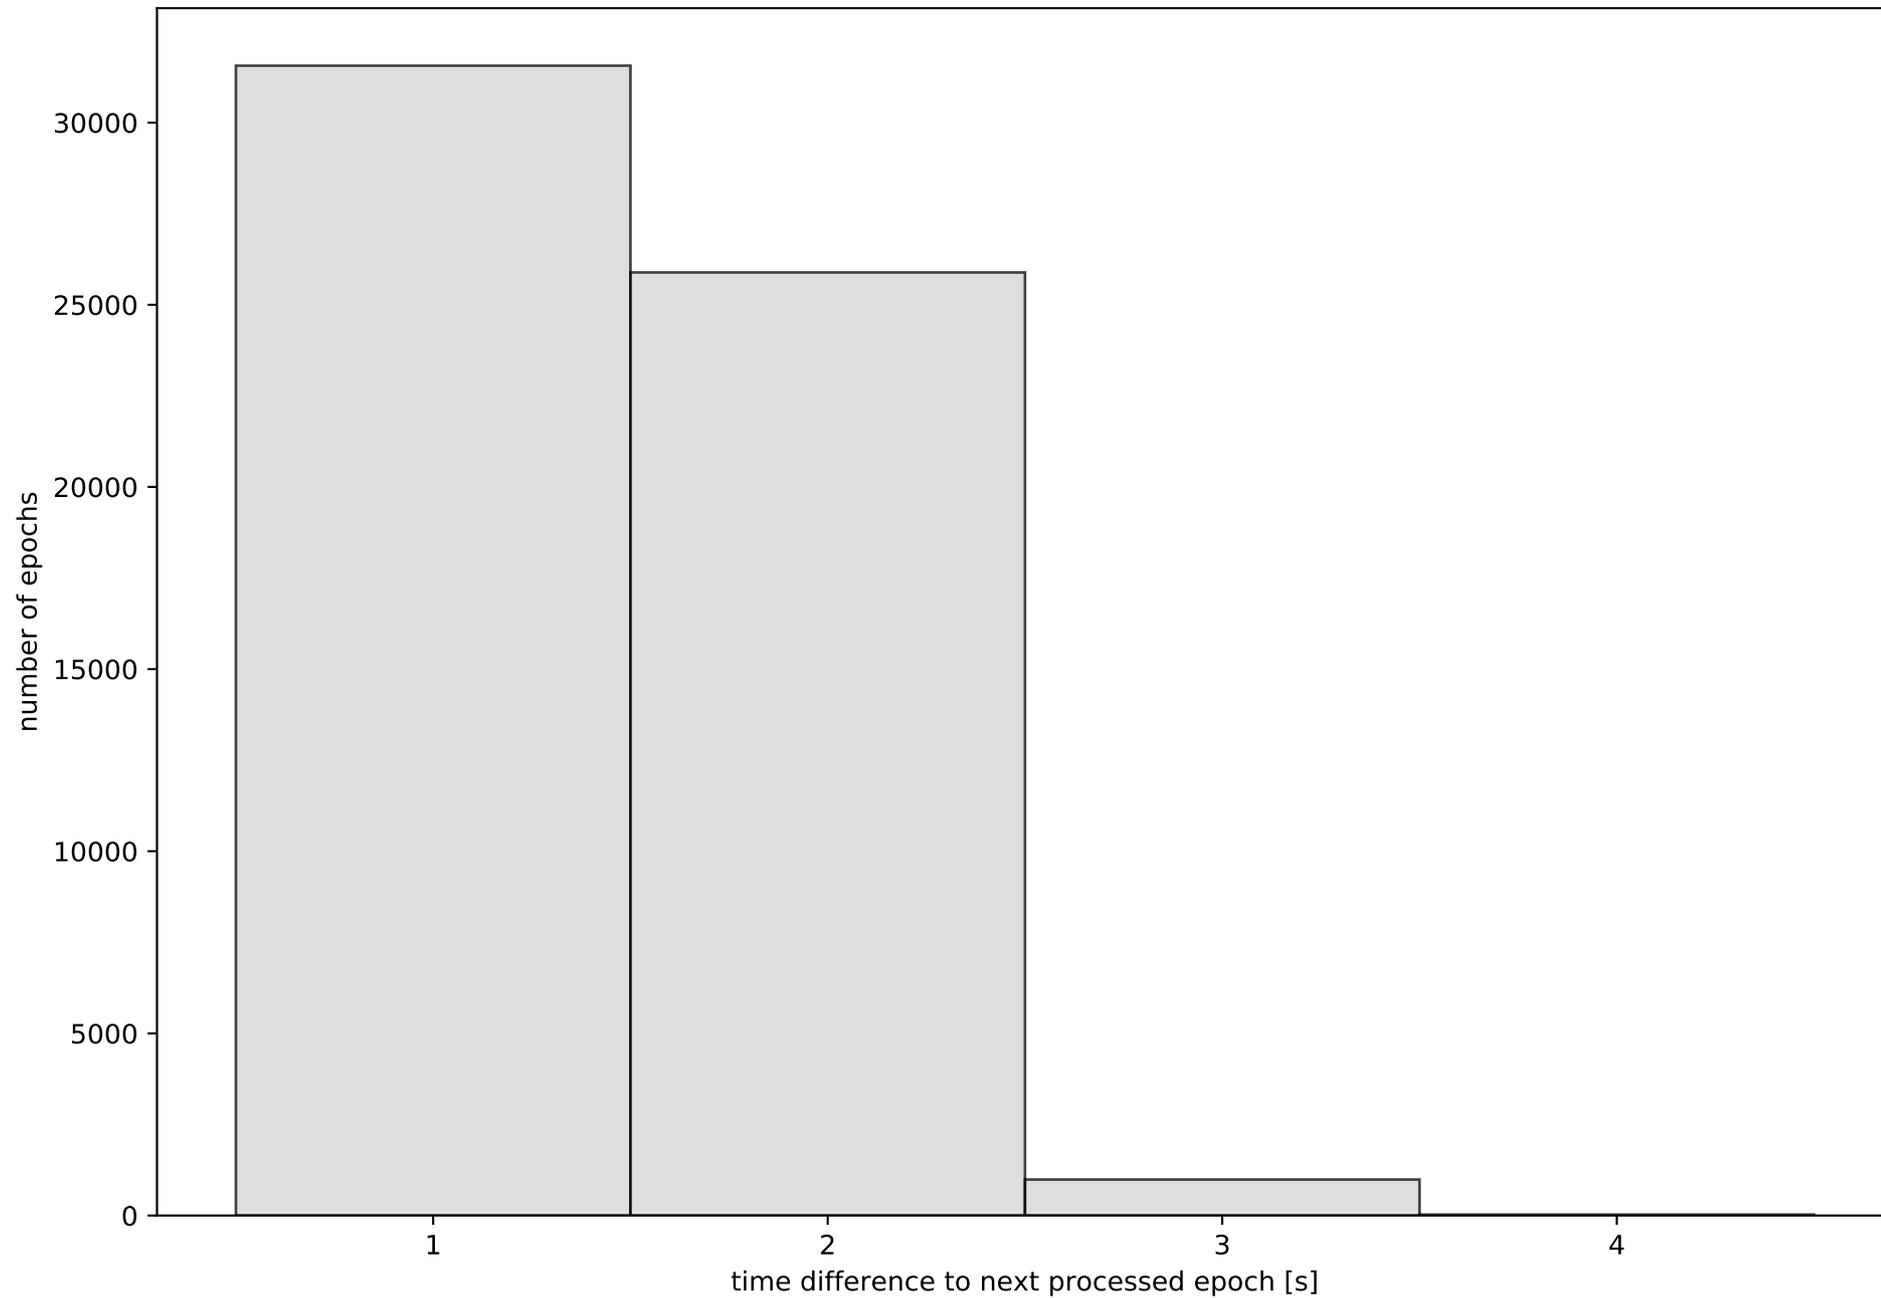


Network N32T with threshold set to 0.3

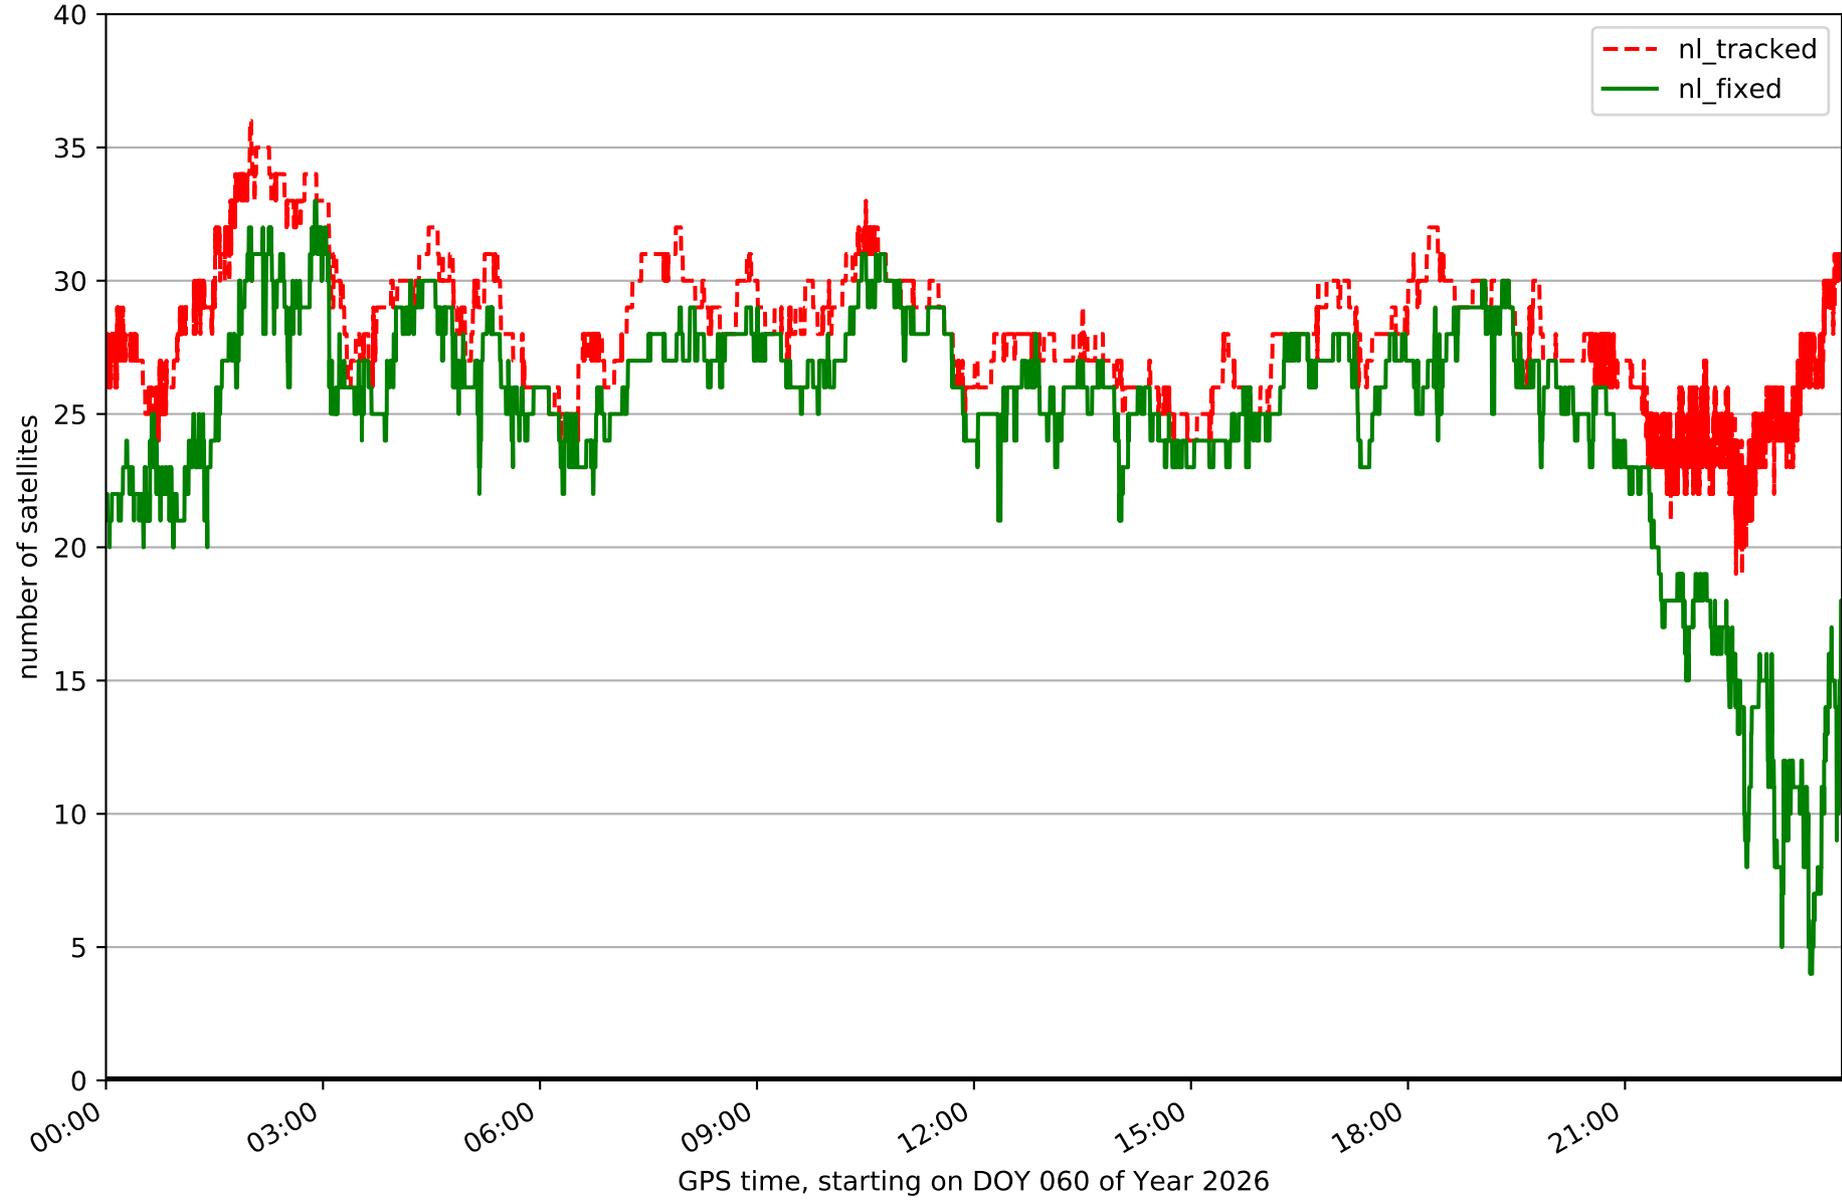


Fixing percentage of satellites in network N32T with threshold set to 0.3

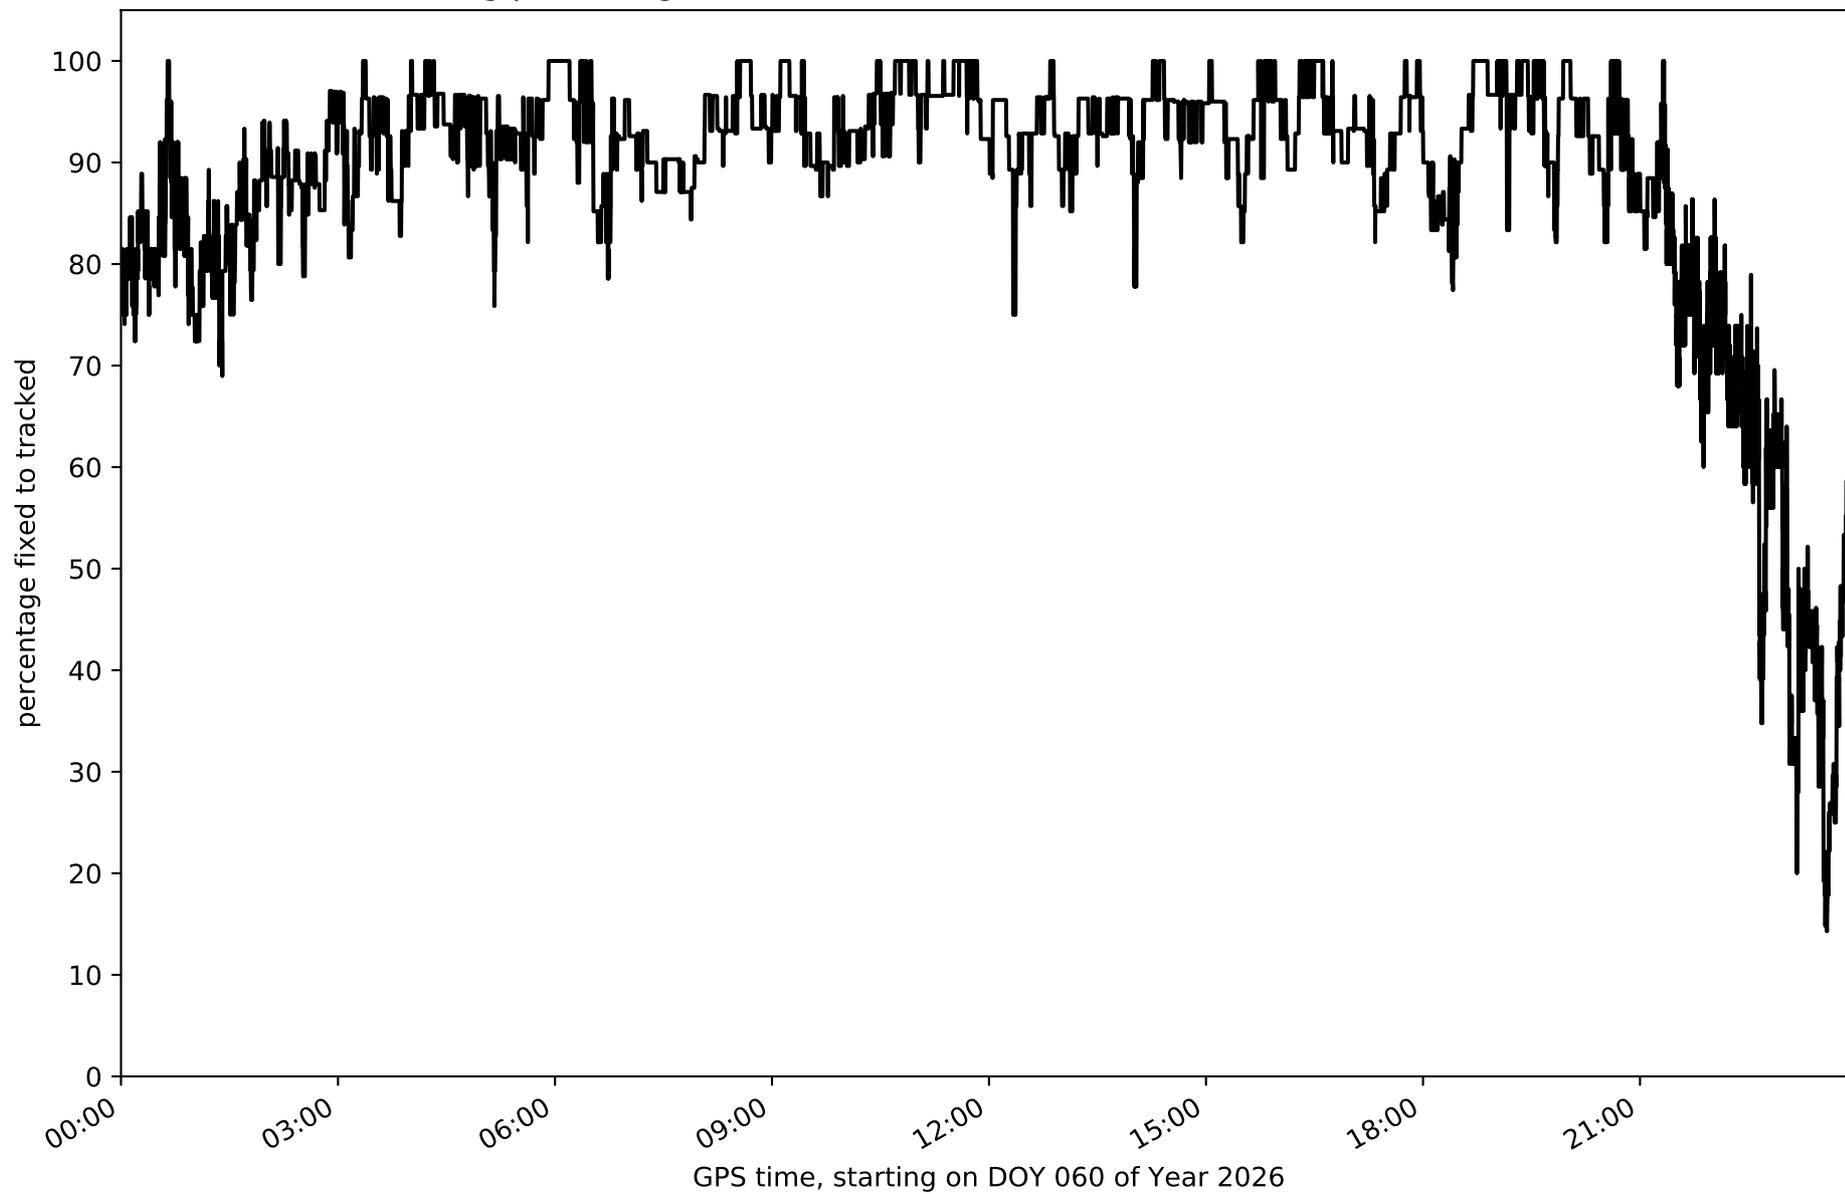


Network N32T - only GPS with threshold set to 0.3

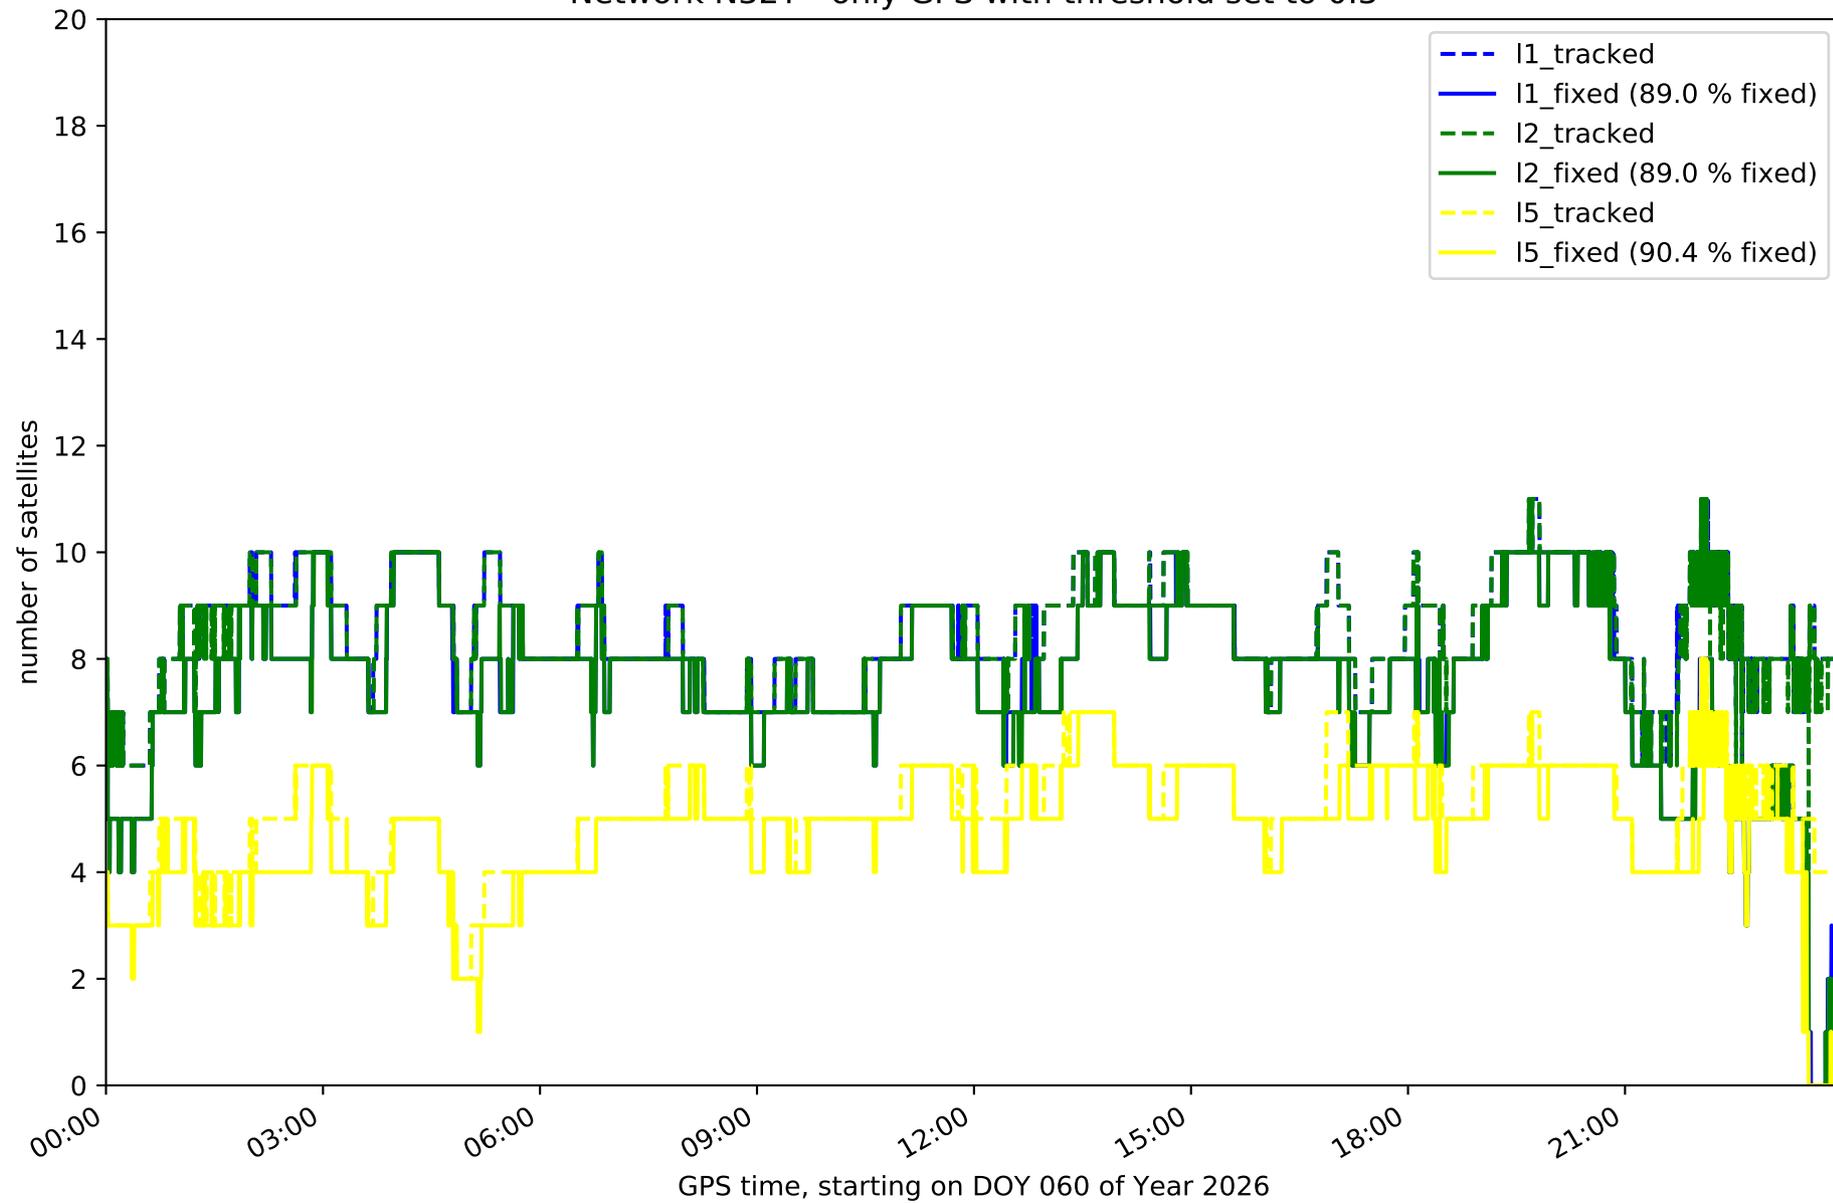


Network N32T - only GLONASS with threshold set to 0.3

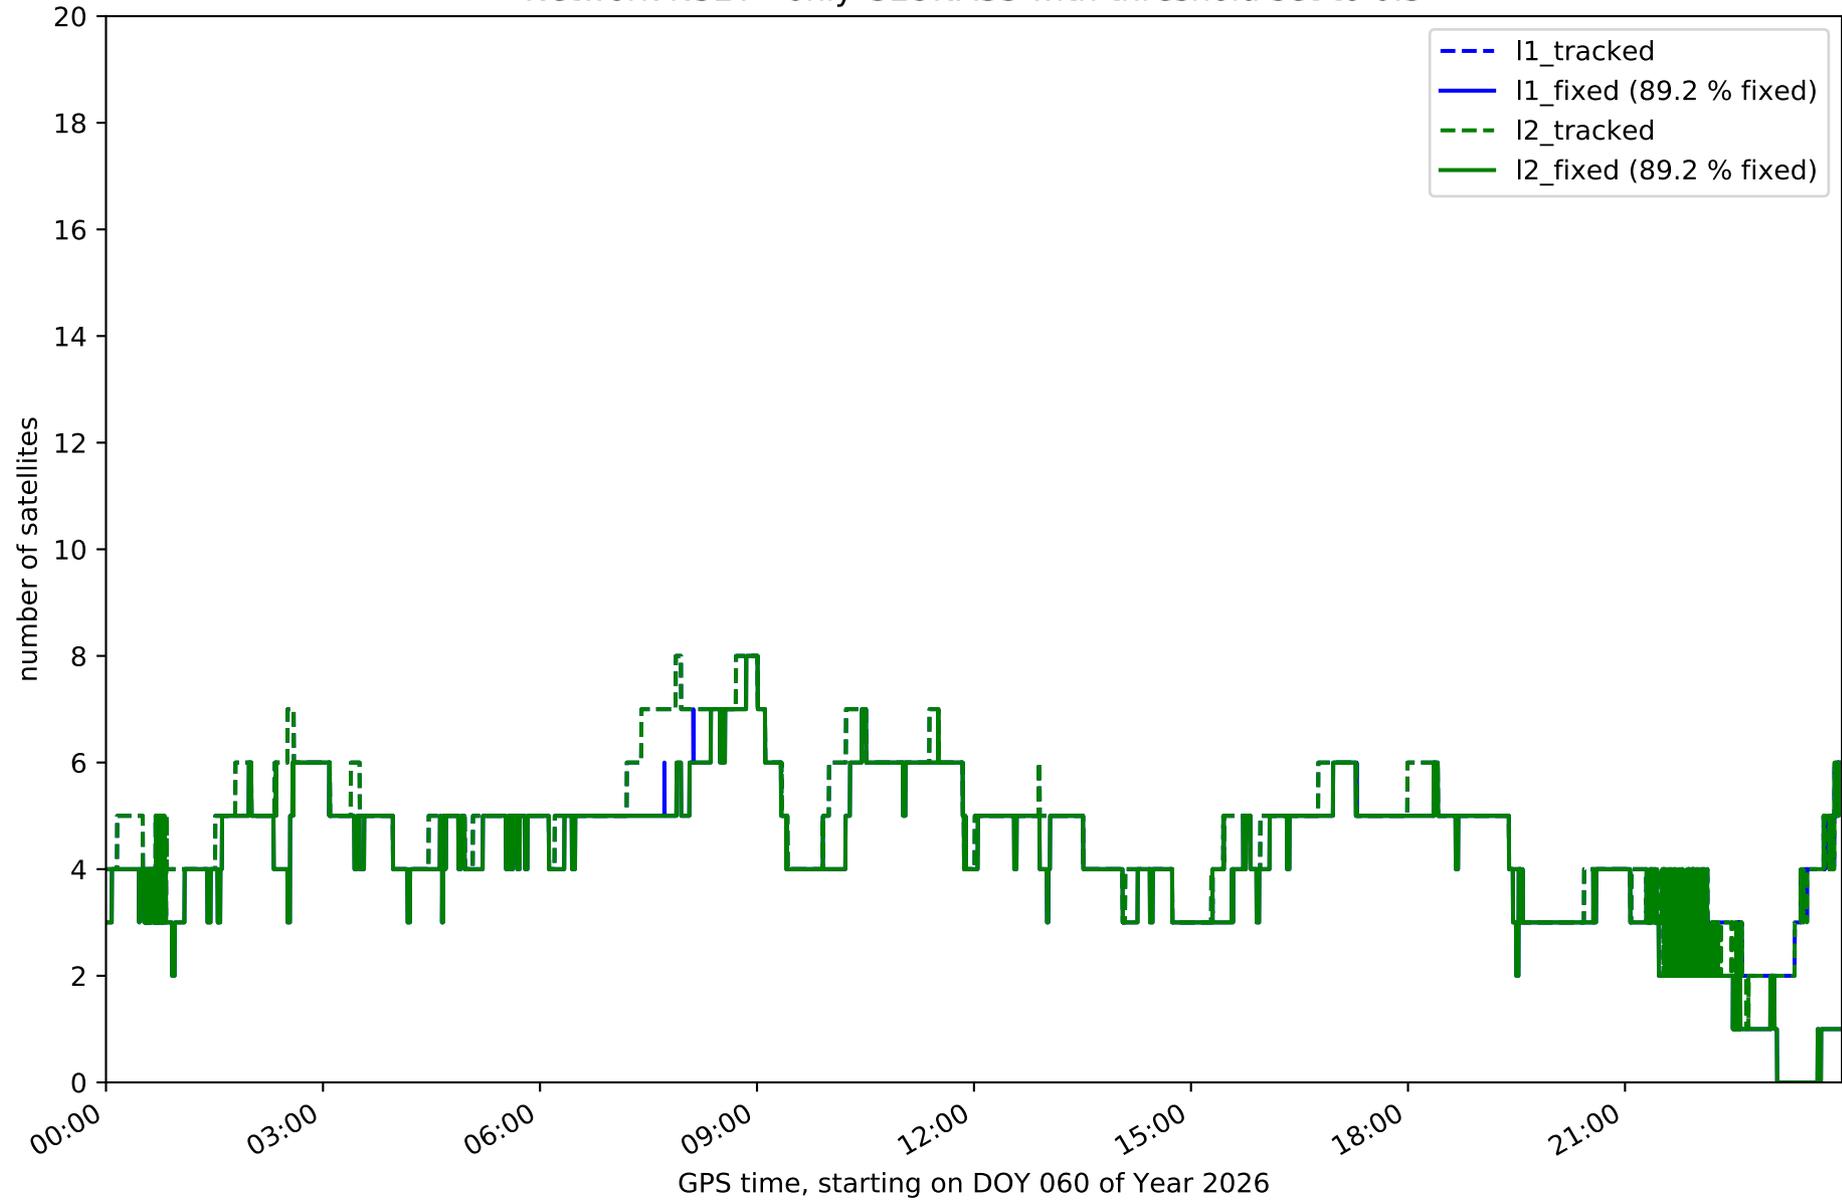


Network N32T - only BDS with threshold set to 0.3

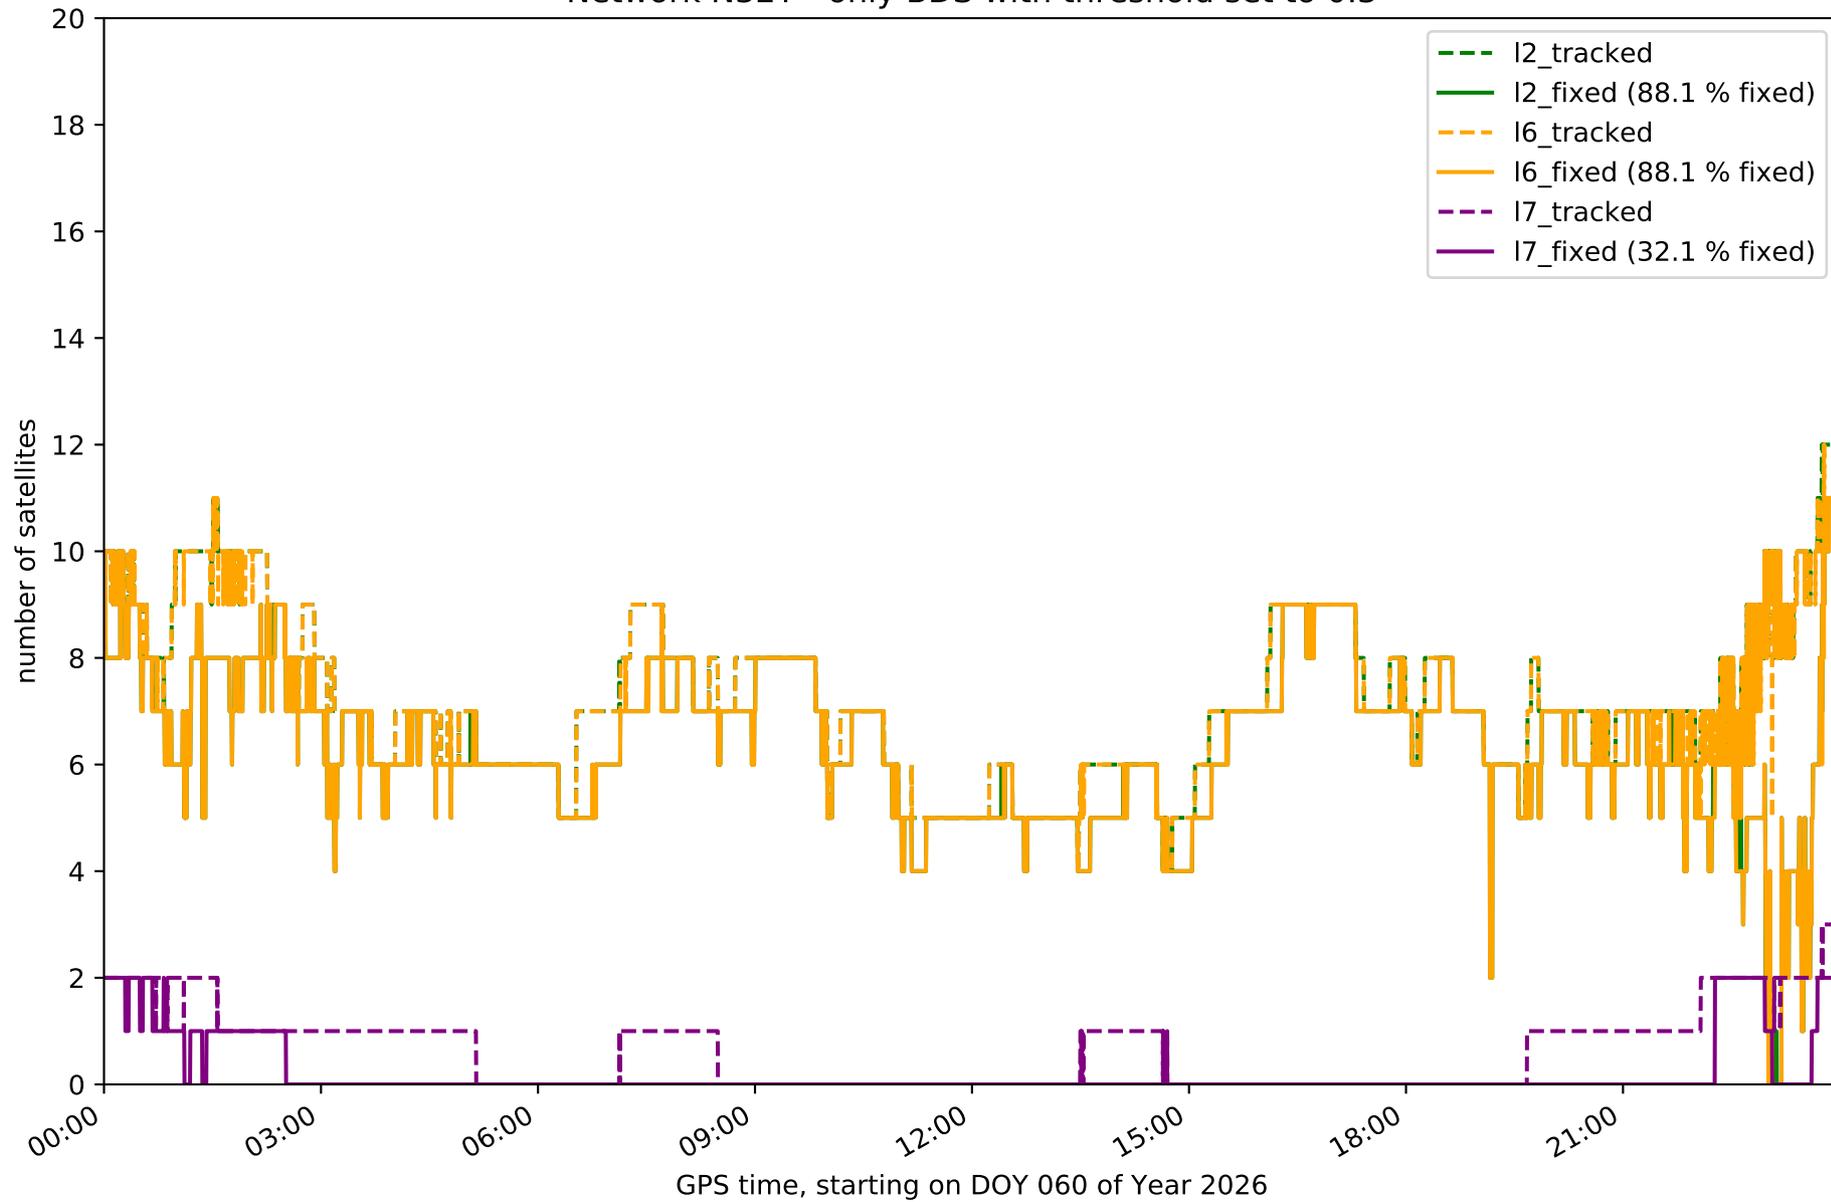


Network N32T - only Galileo with threshold set to 0.3

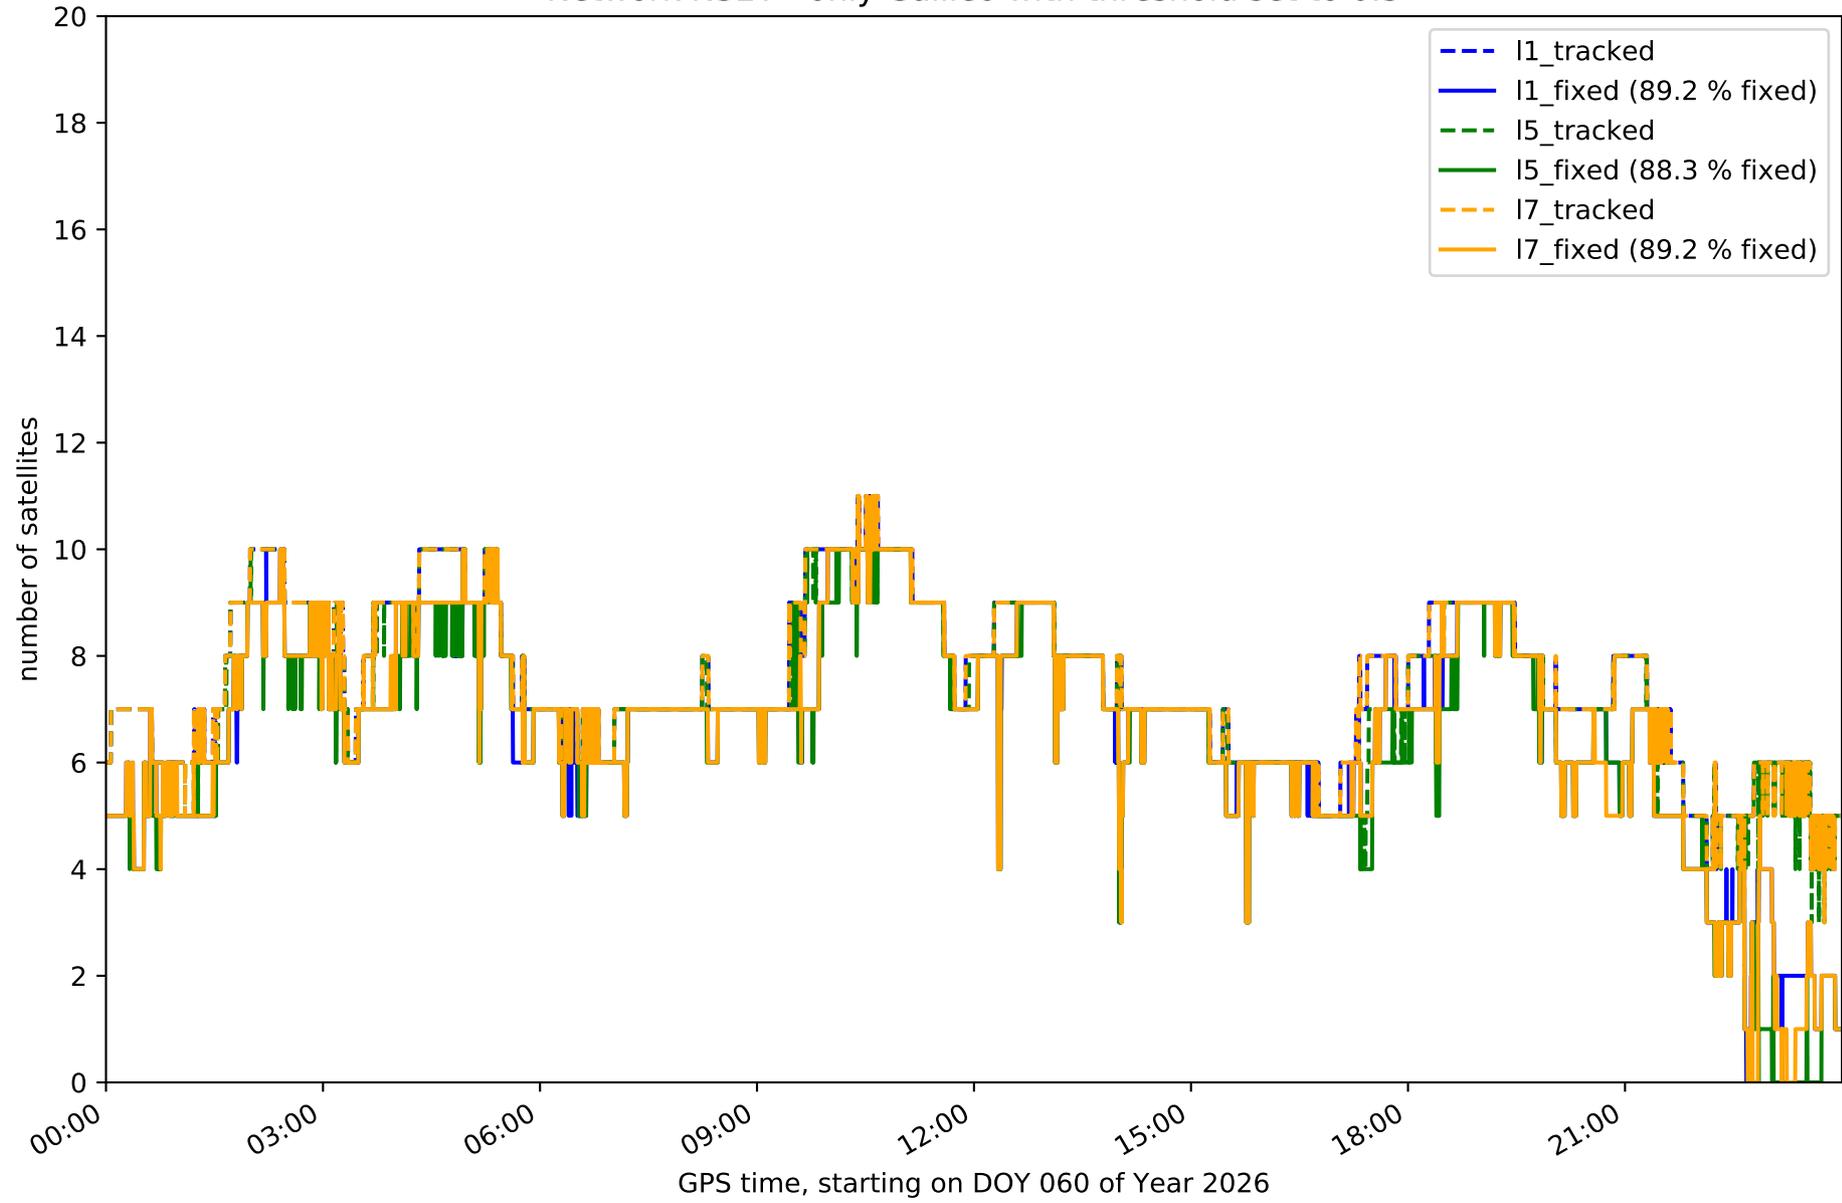


Station EH01 in network N32T

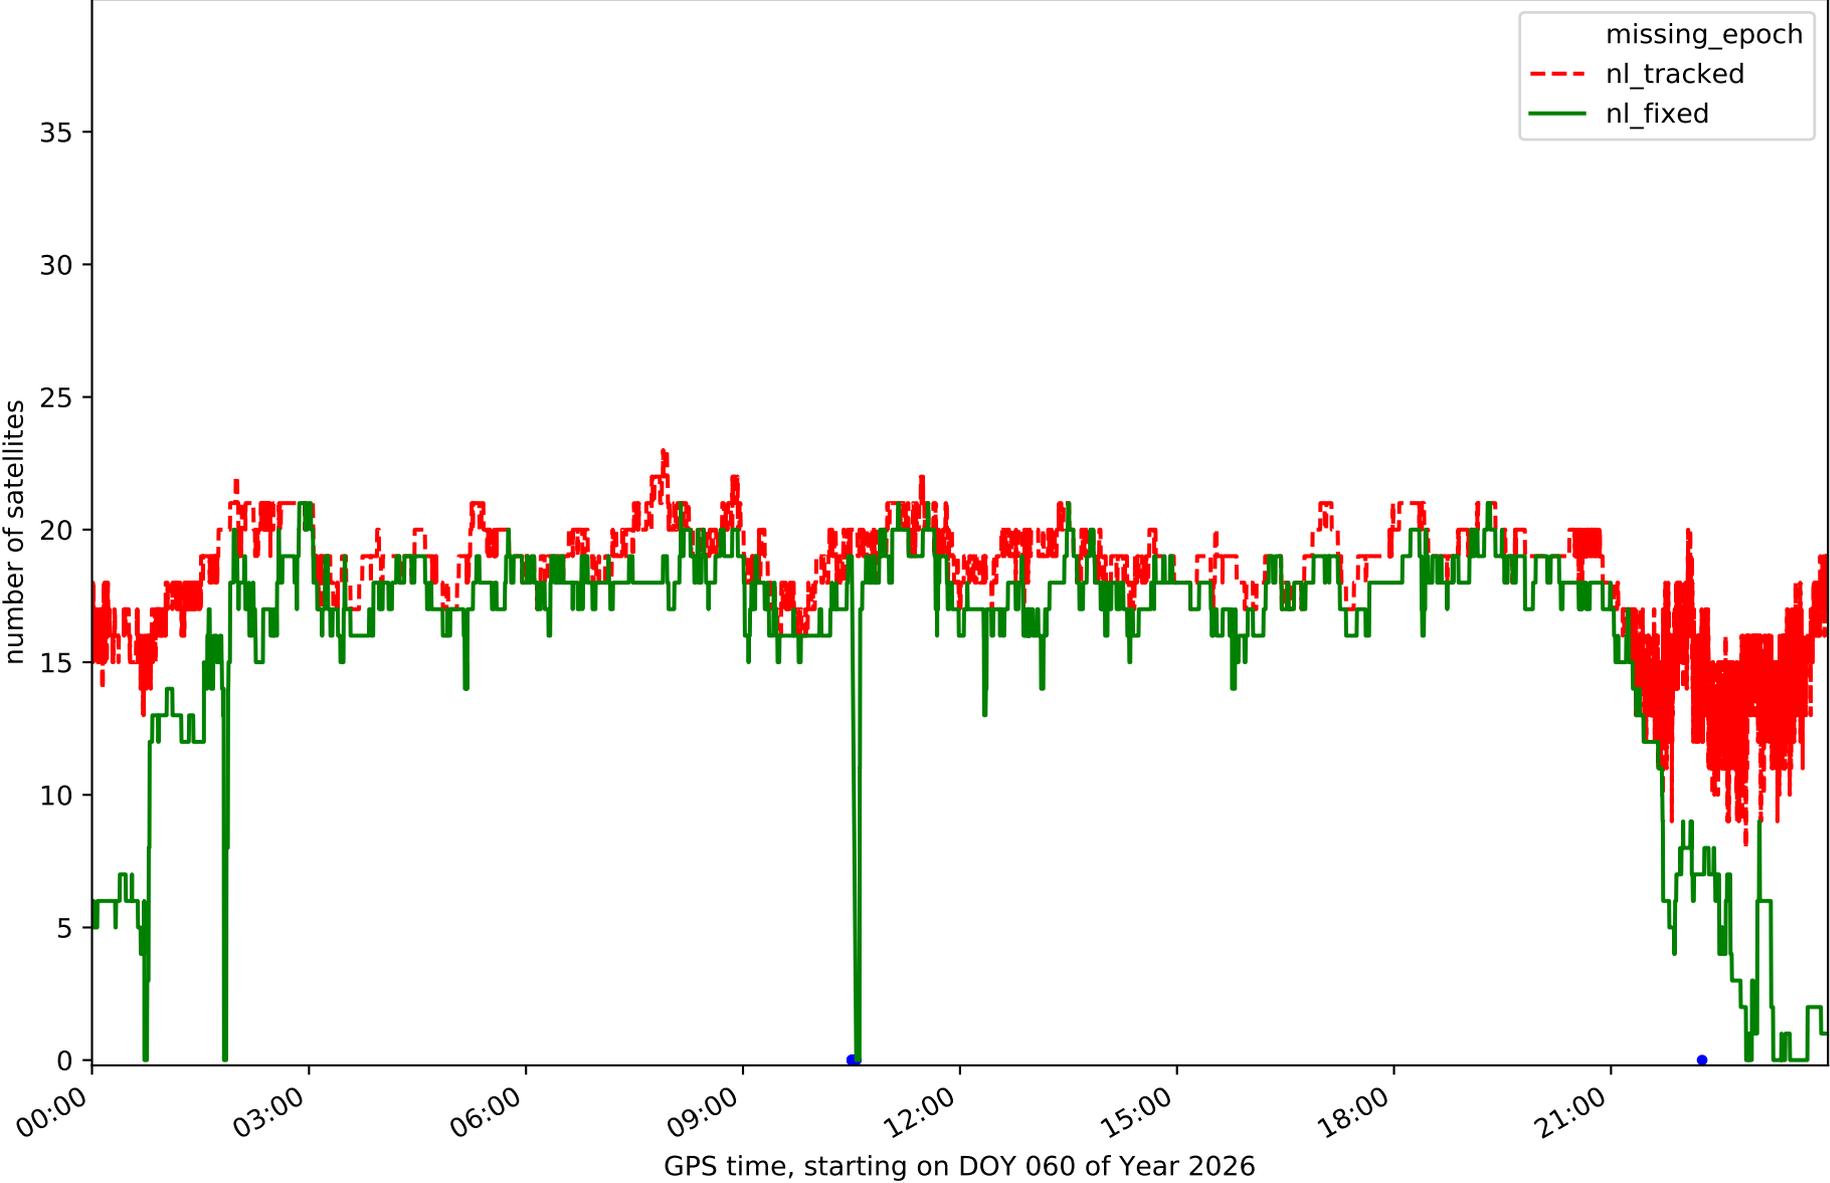


Station EH02 in network N32T

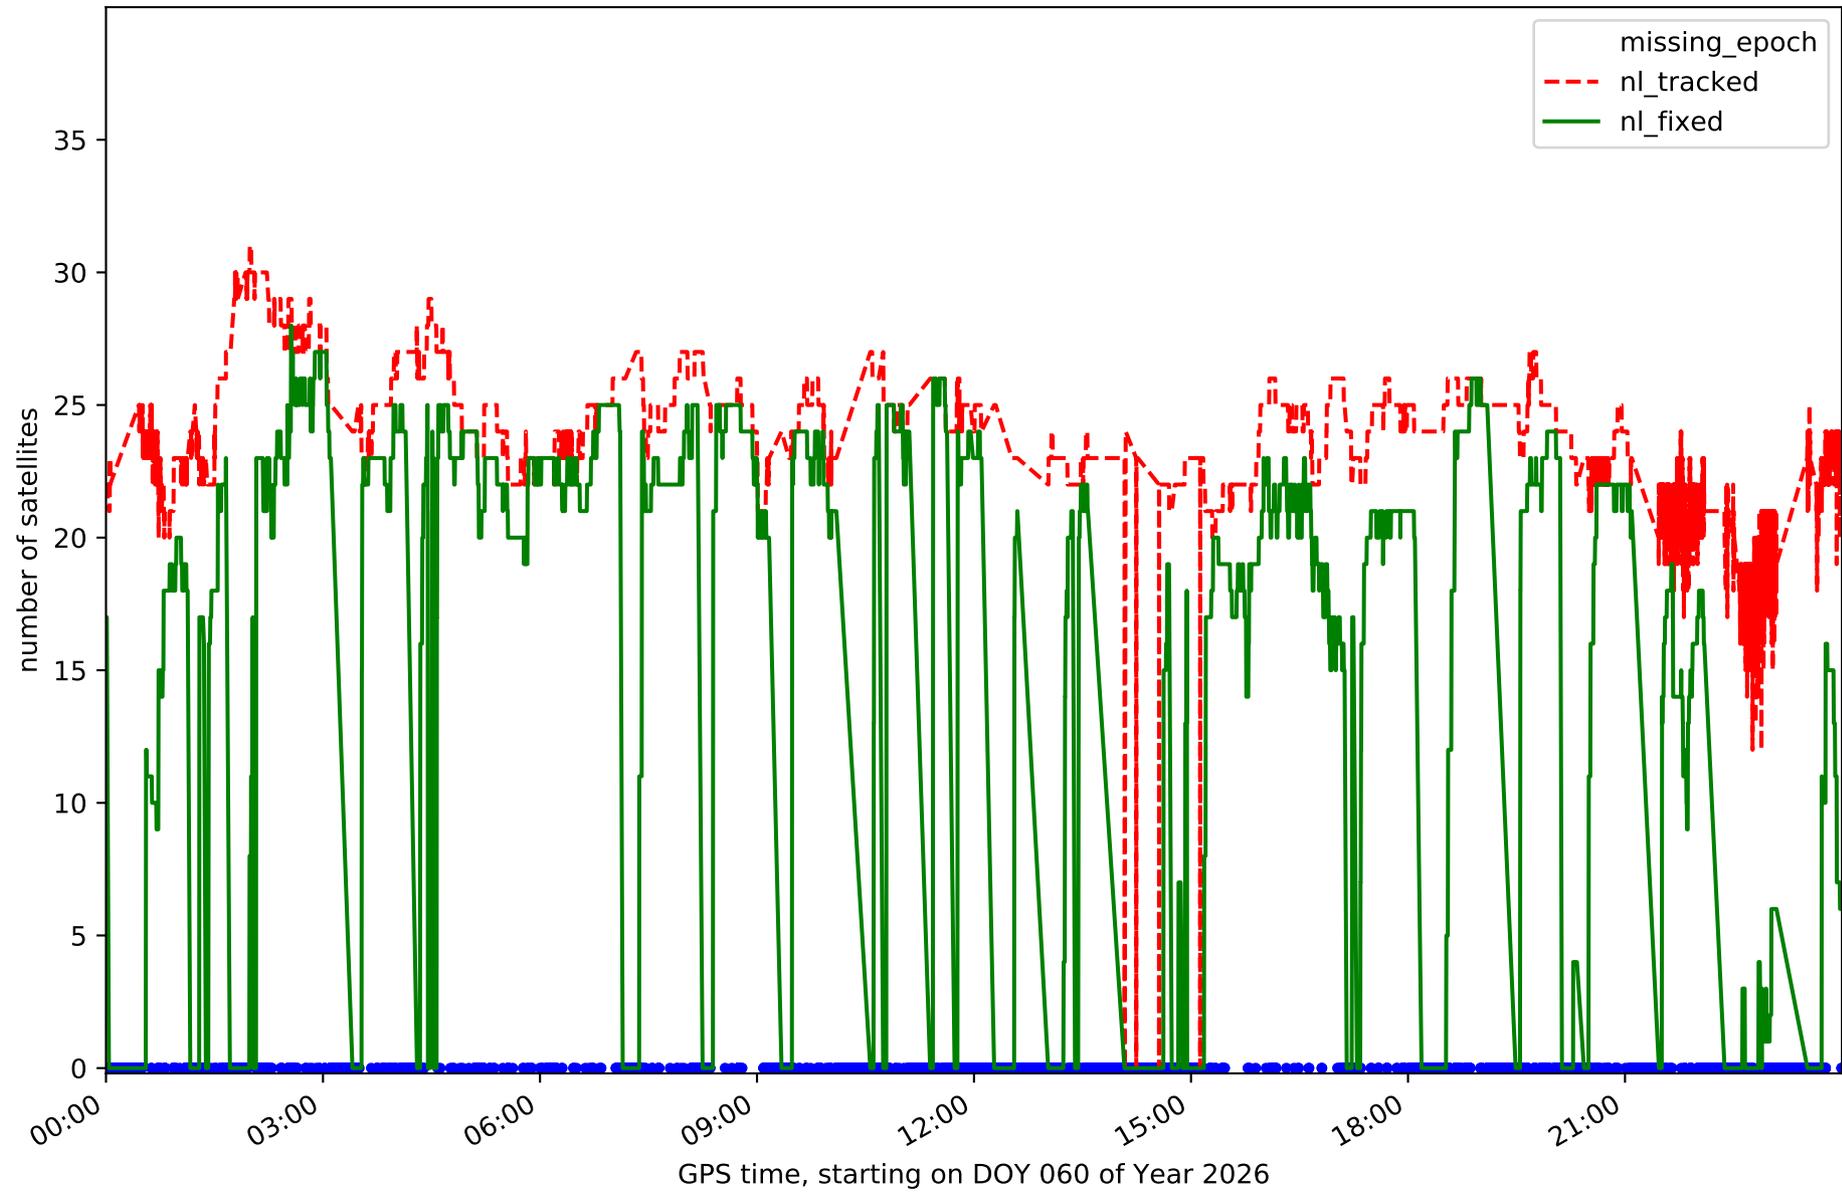


Station GOM1 in network N32T

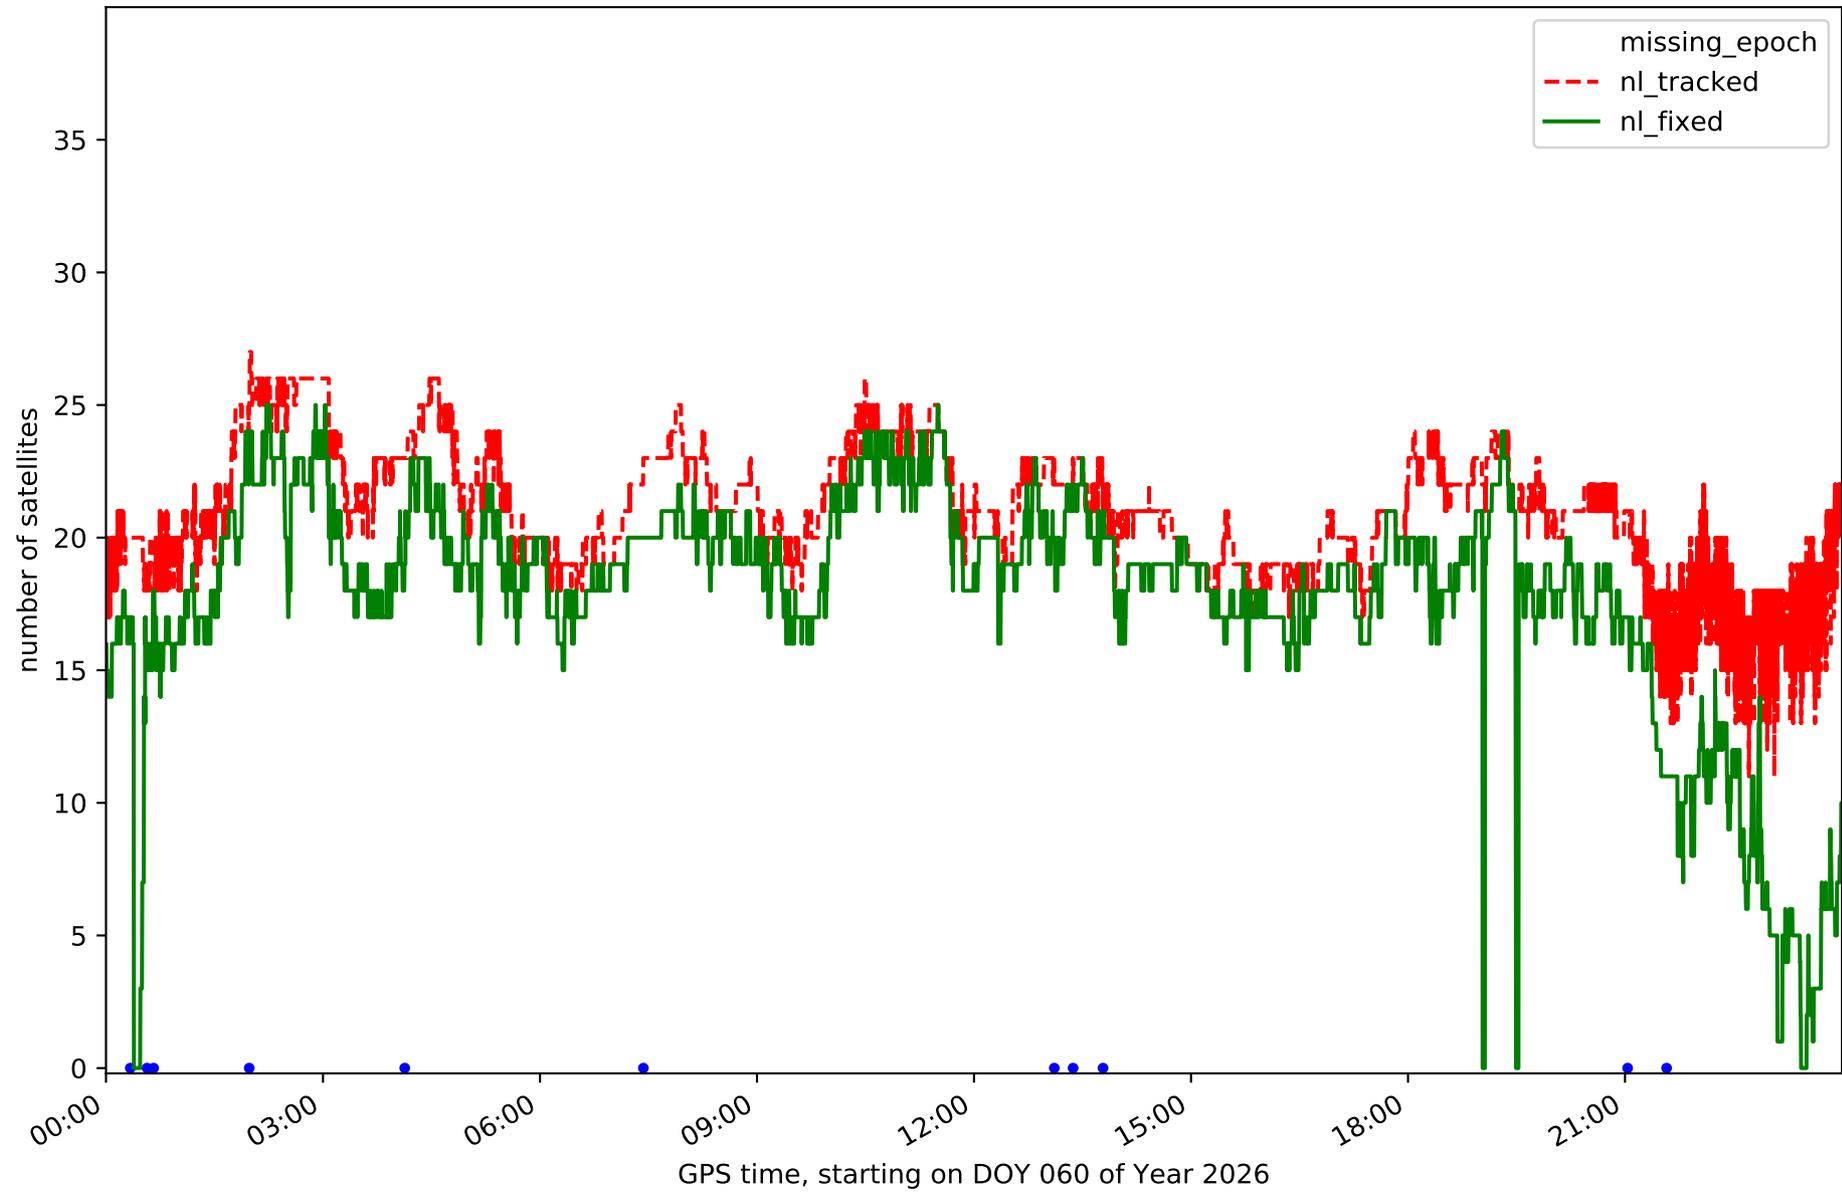


Station GOME in network N32T

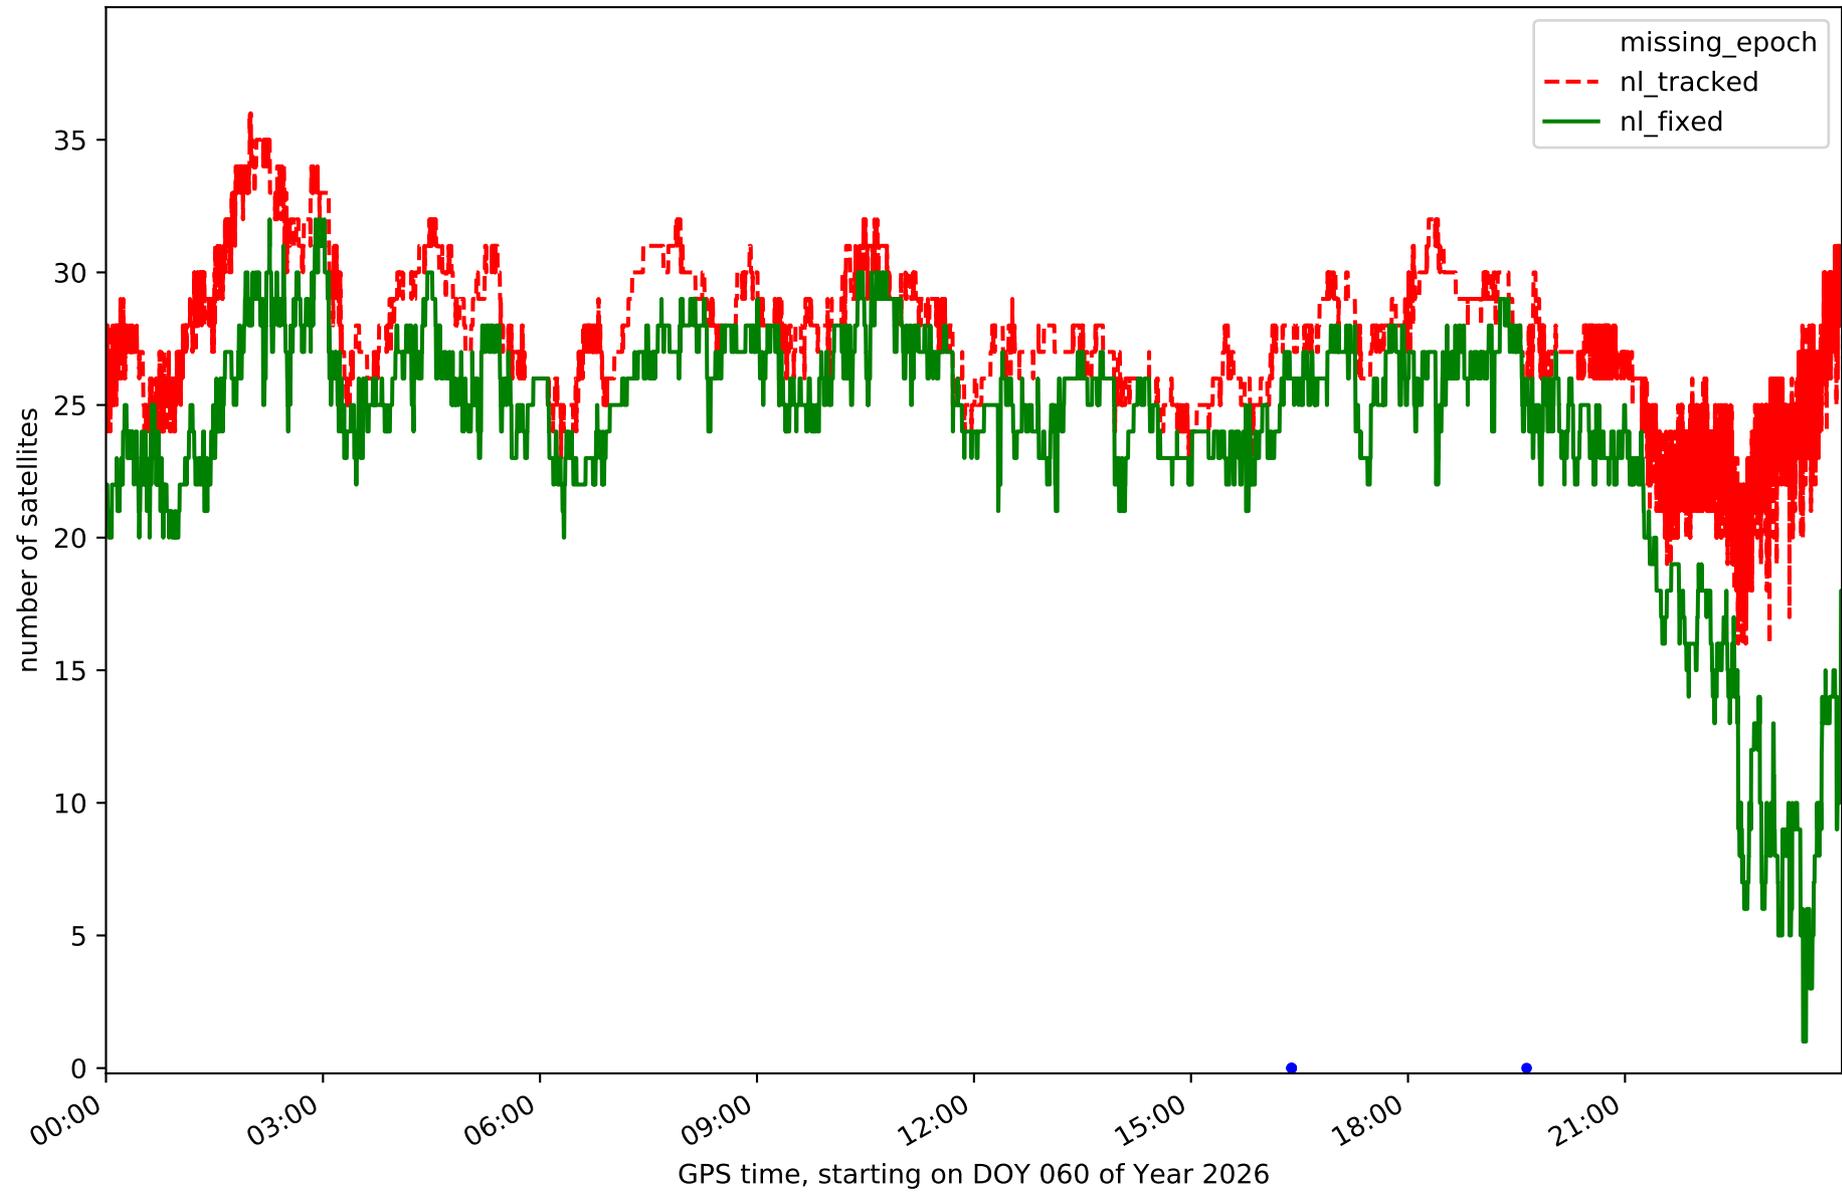


Station IZAN in network N32T

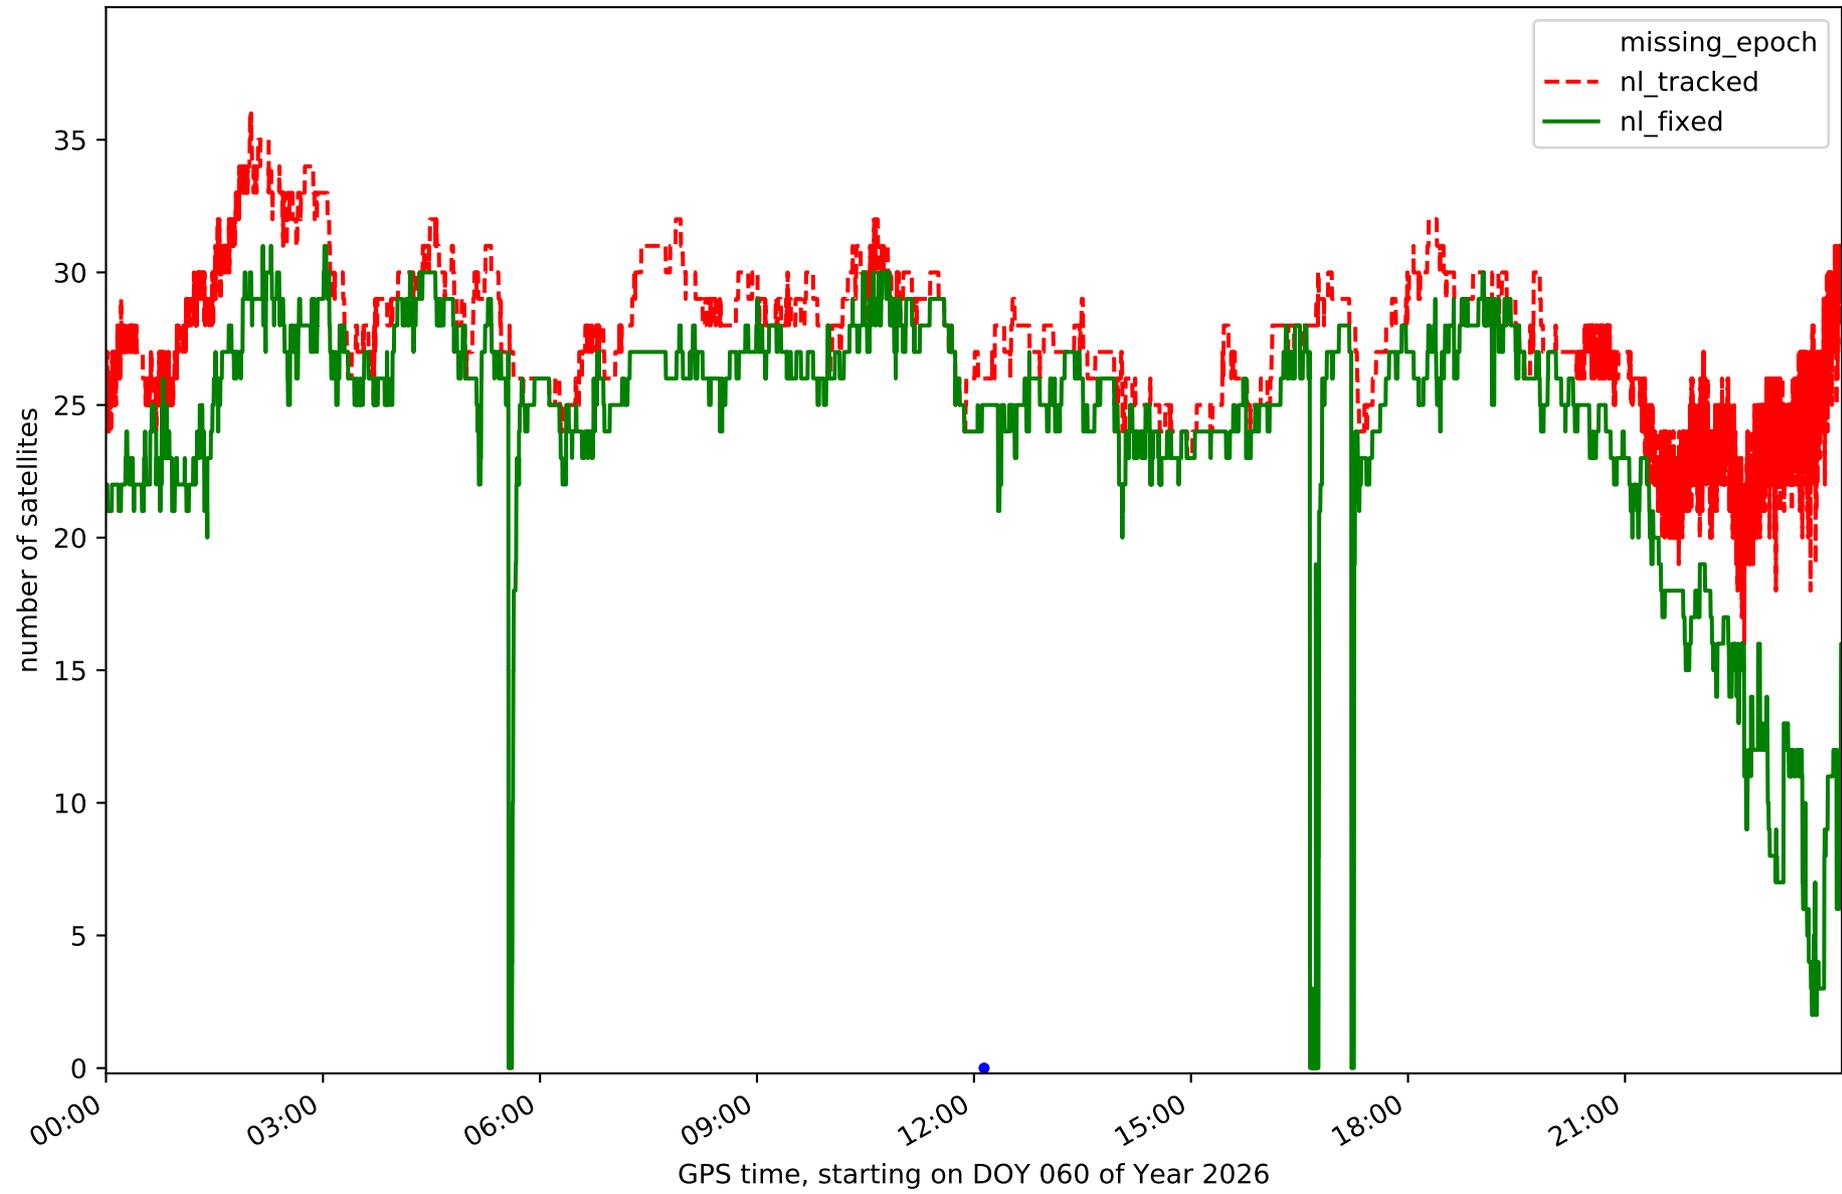


Station LP01 in network N32T

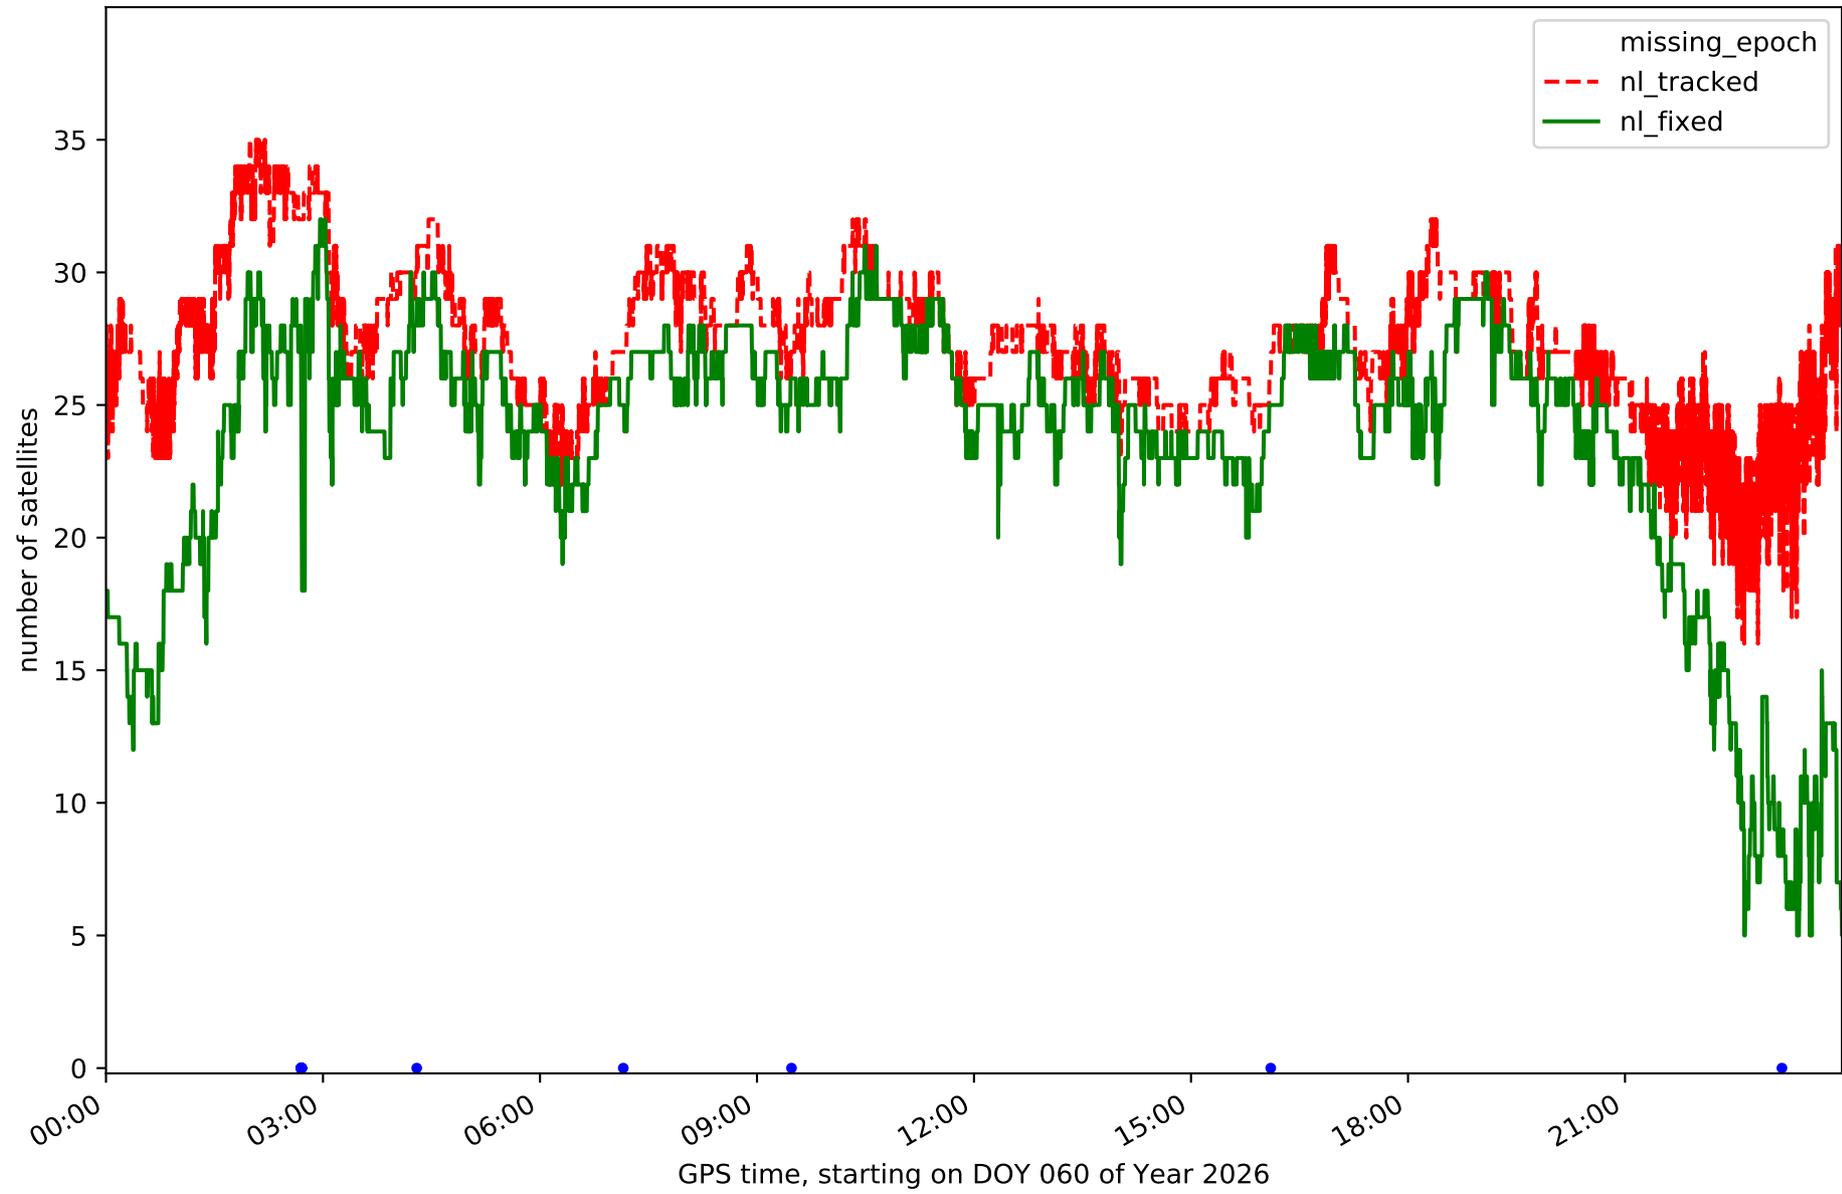


Station LP03 in network N32T

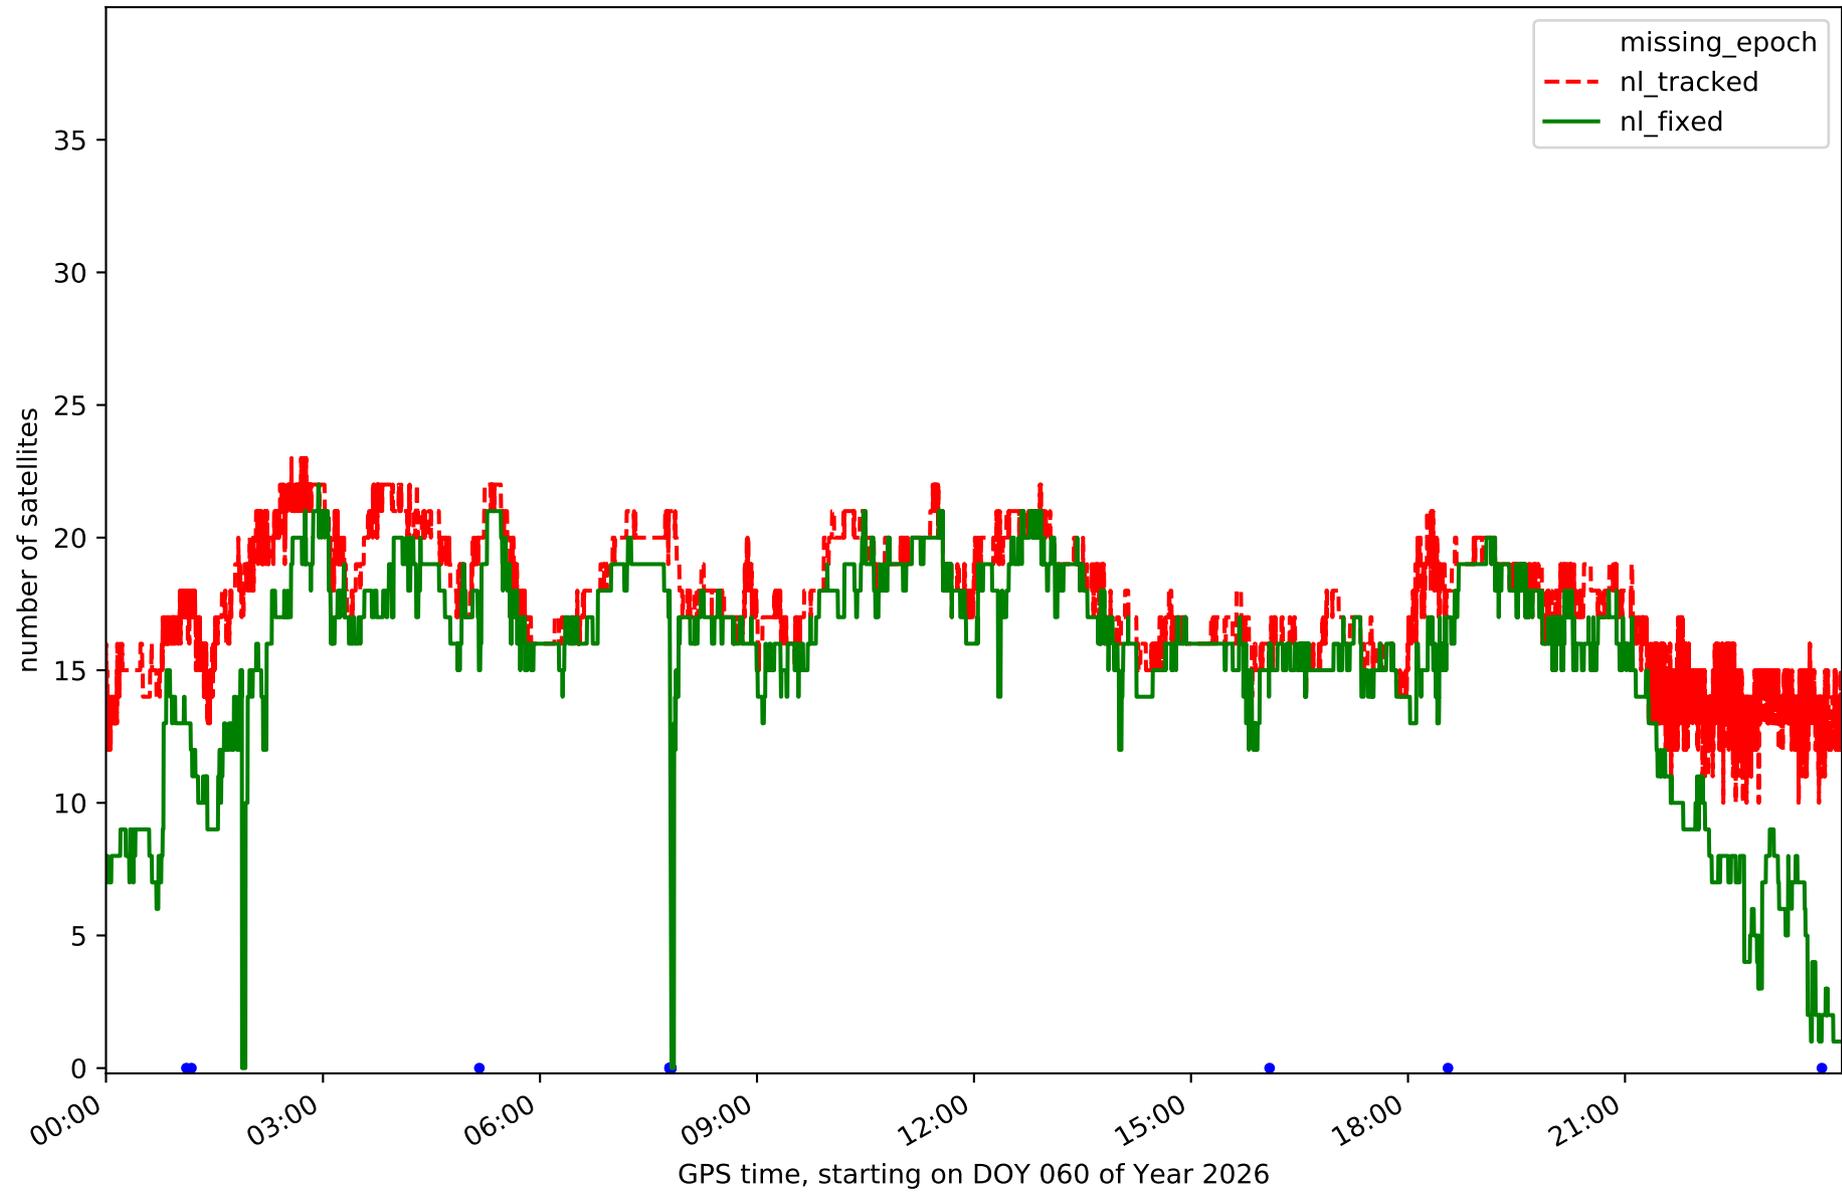


Station LPAL in network N32T

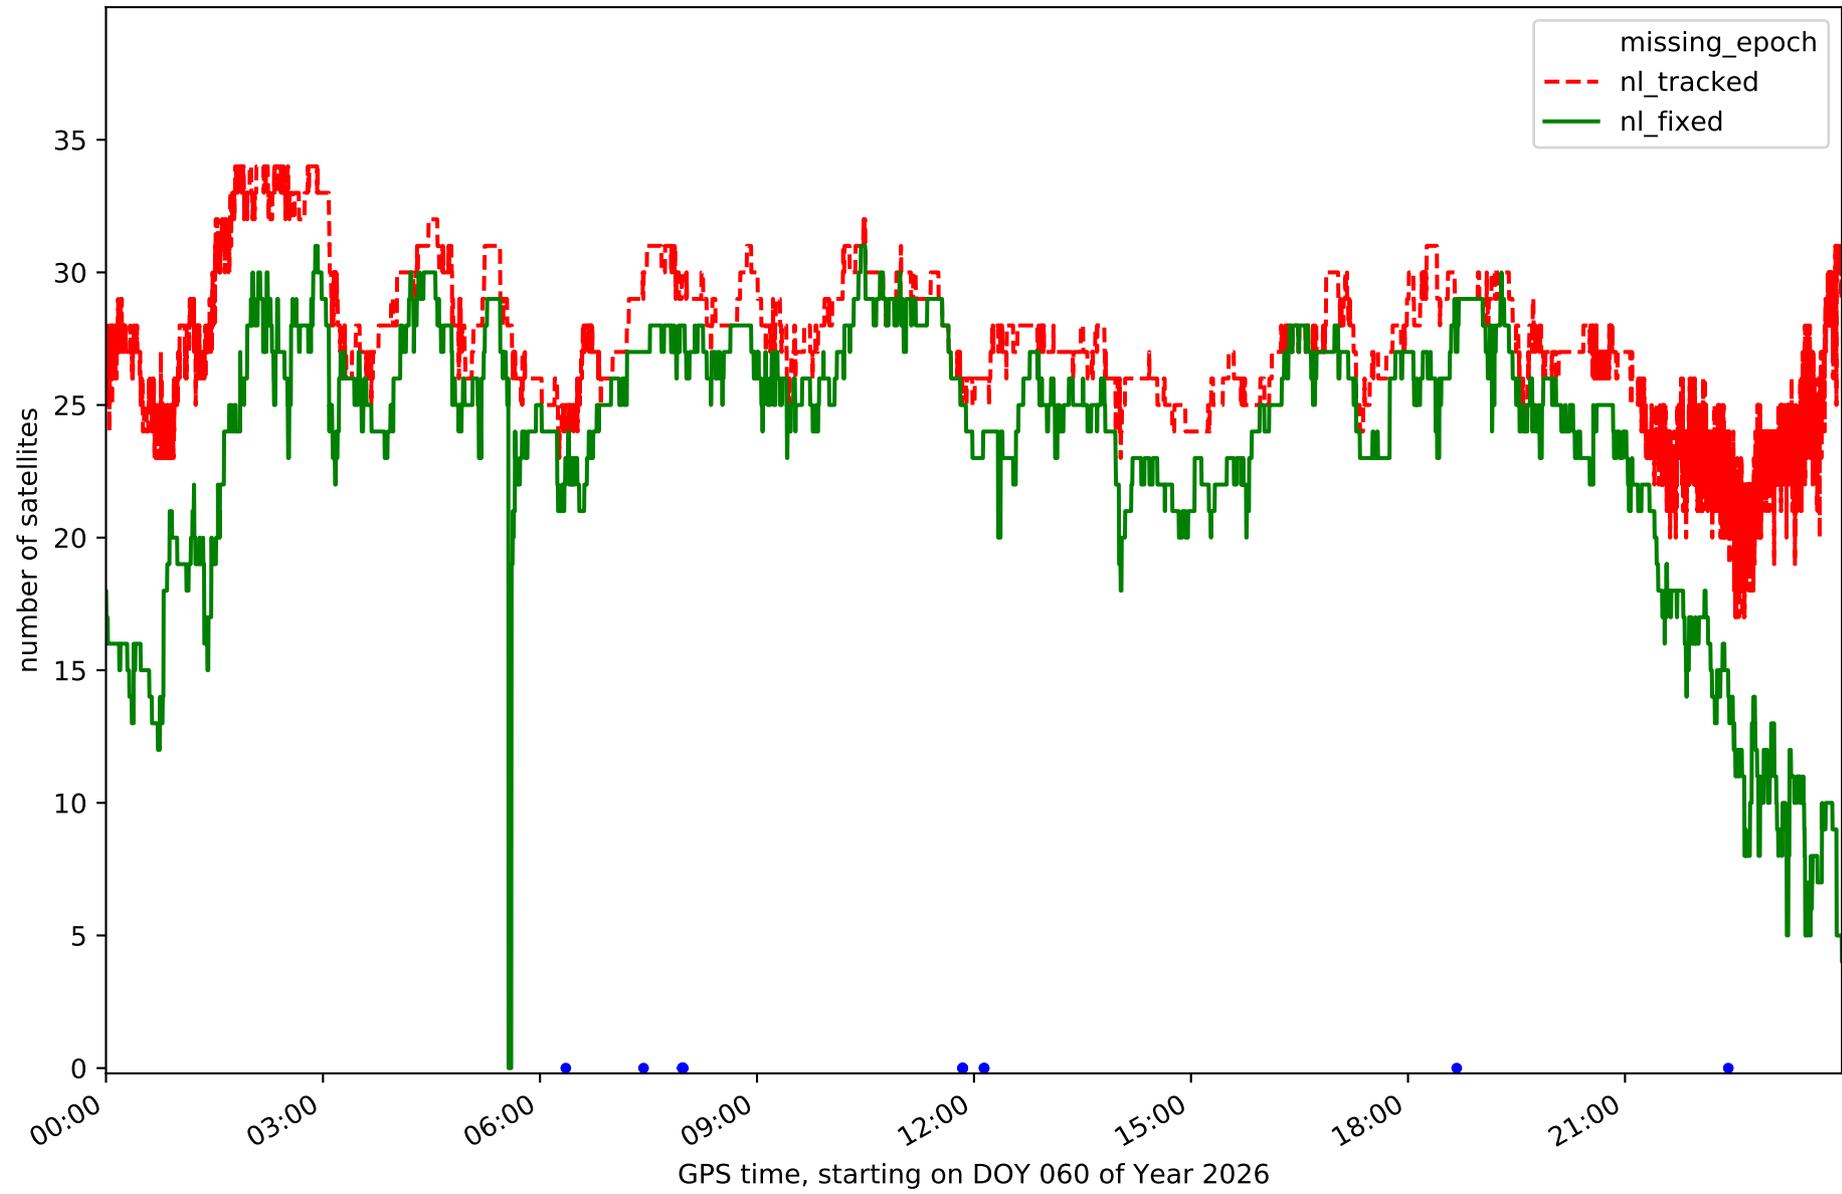


Station LRES in network N32T

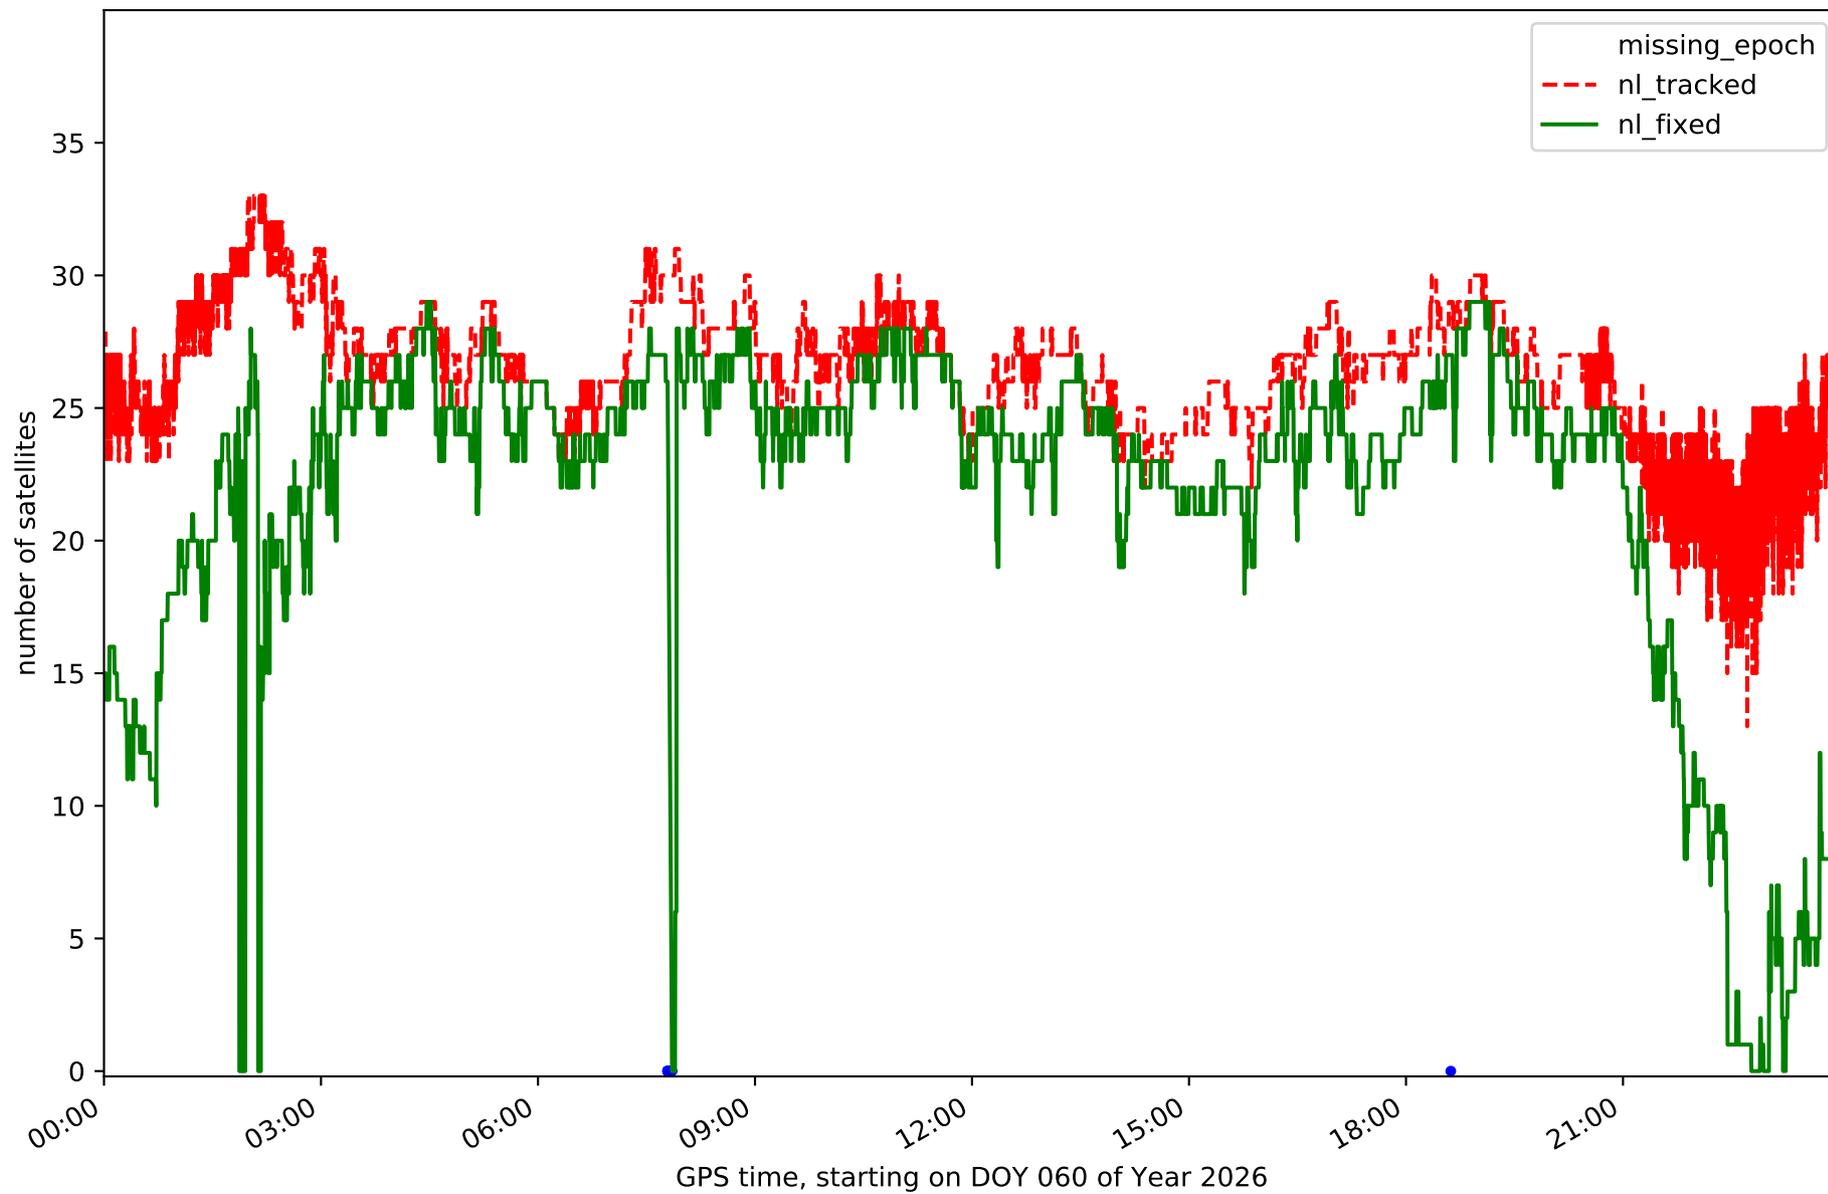


Station TN01 in network N32T

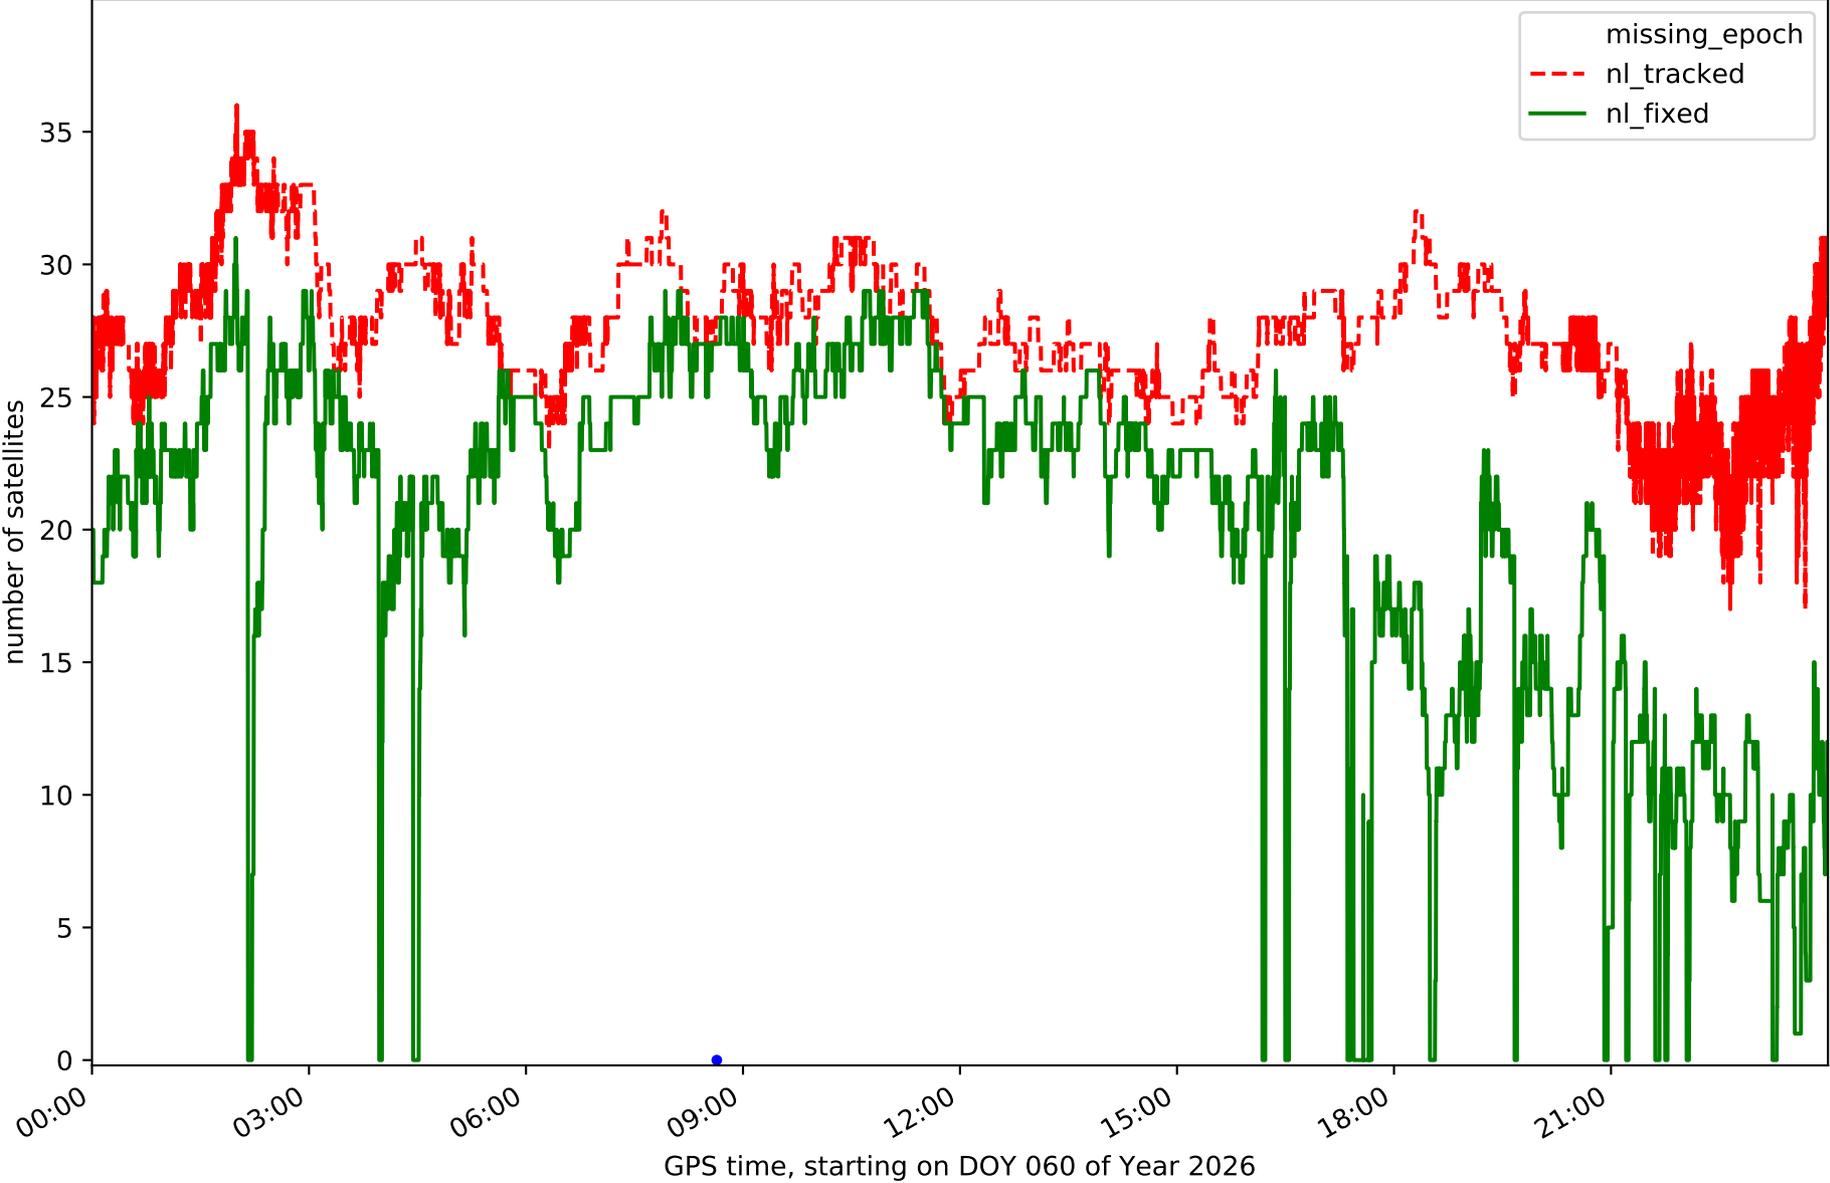


Station TN02 in network N32T

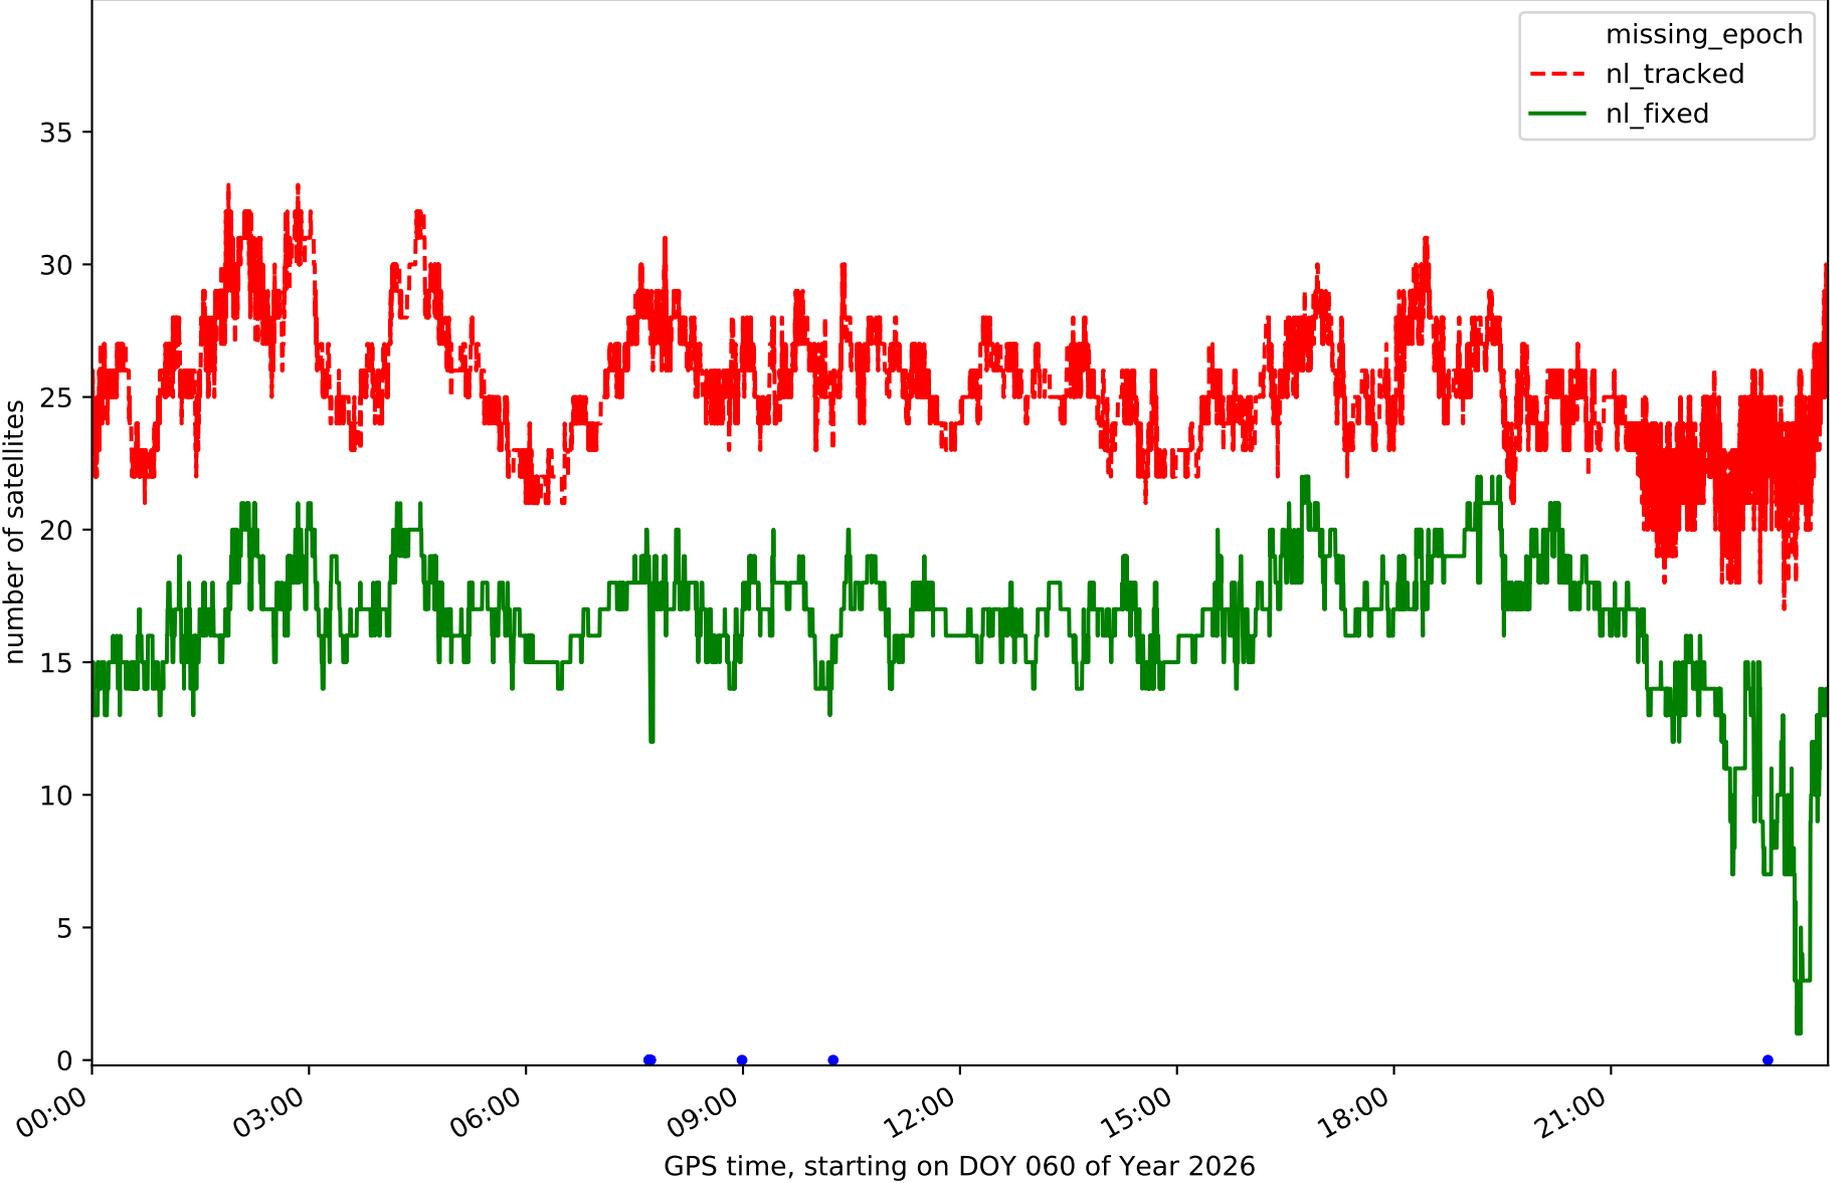


Station TN03 in network N32T

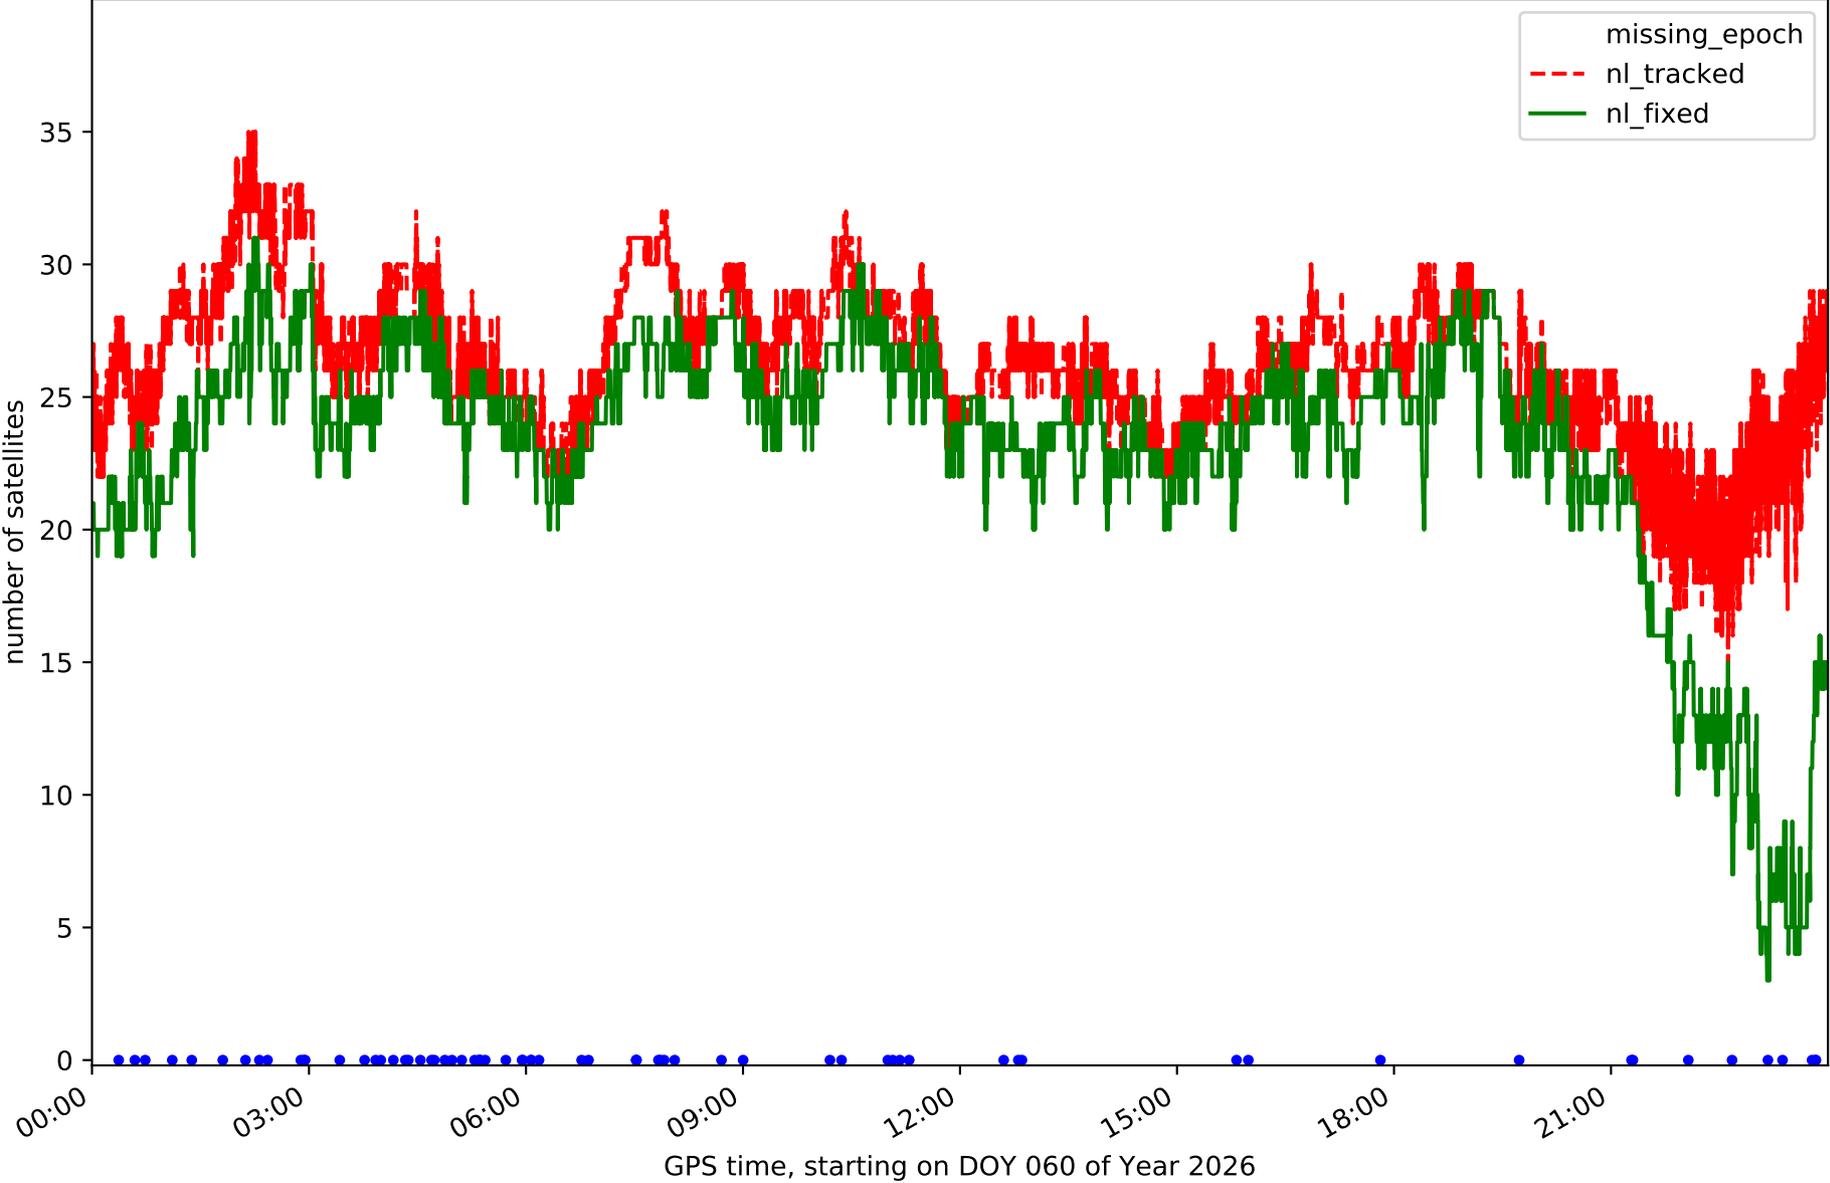


Station TN06 in network N32T

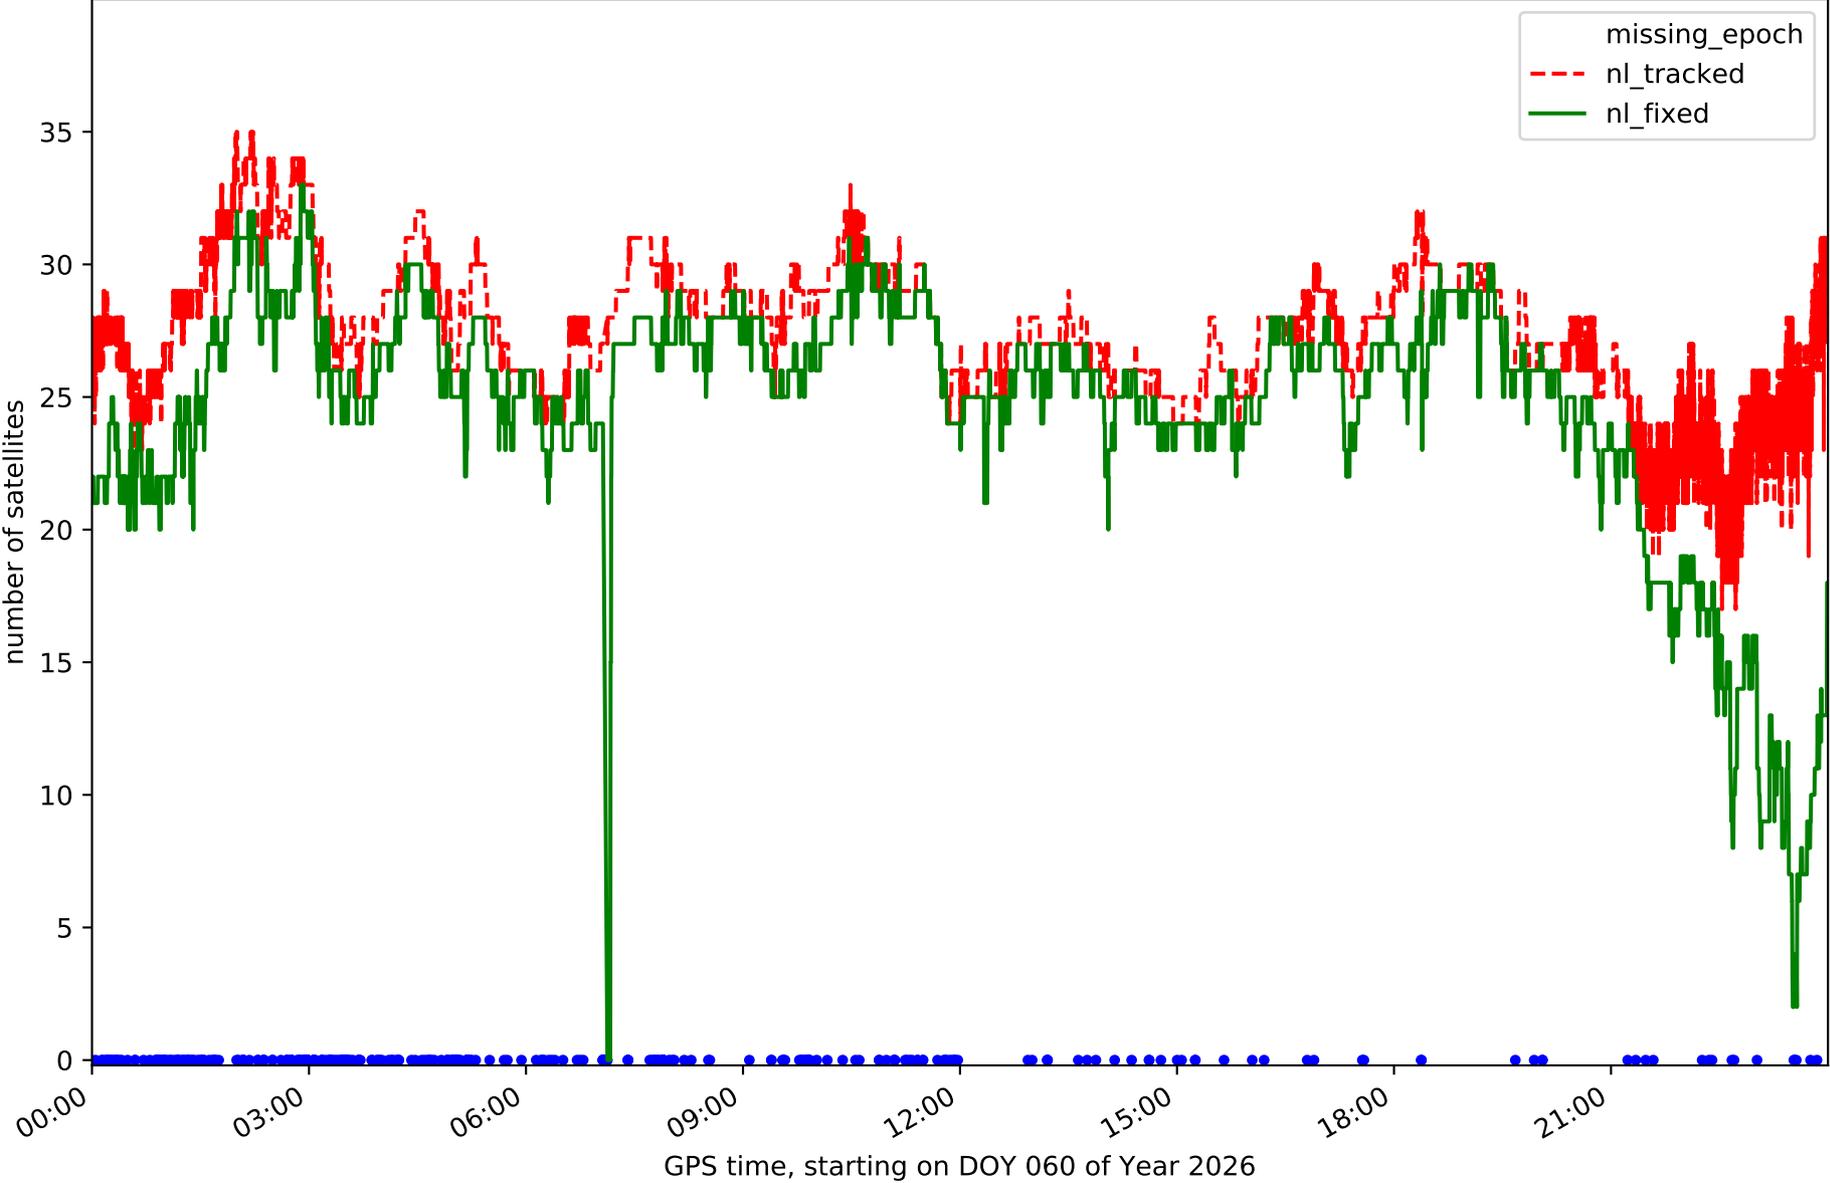


Station TN09 in network N32T

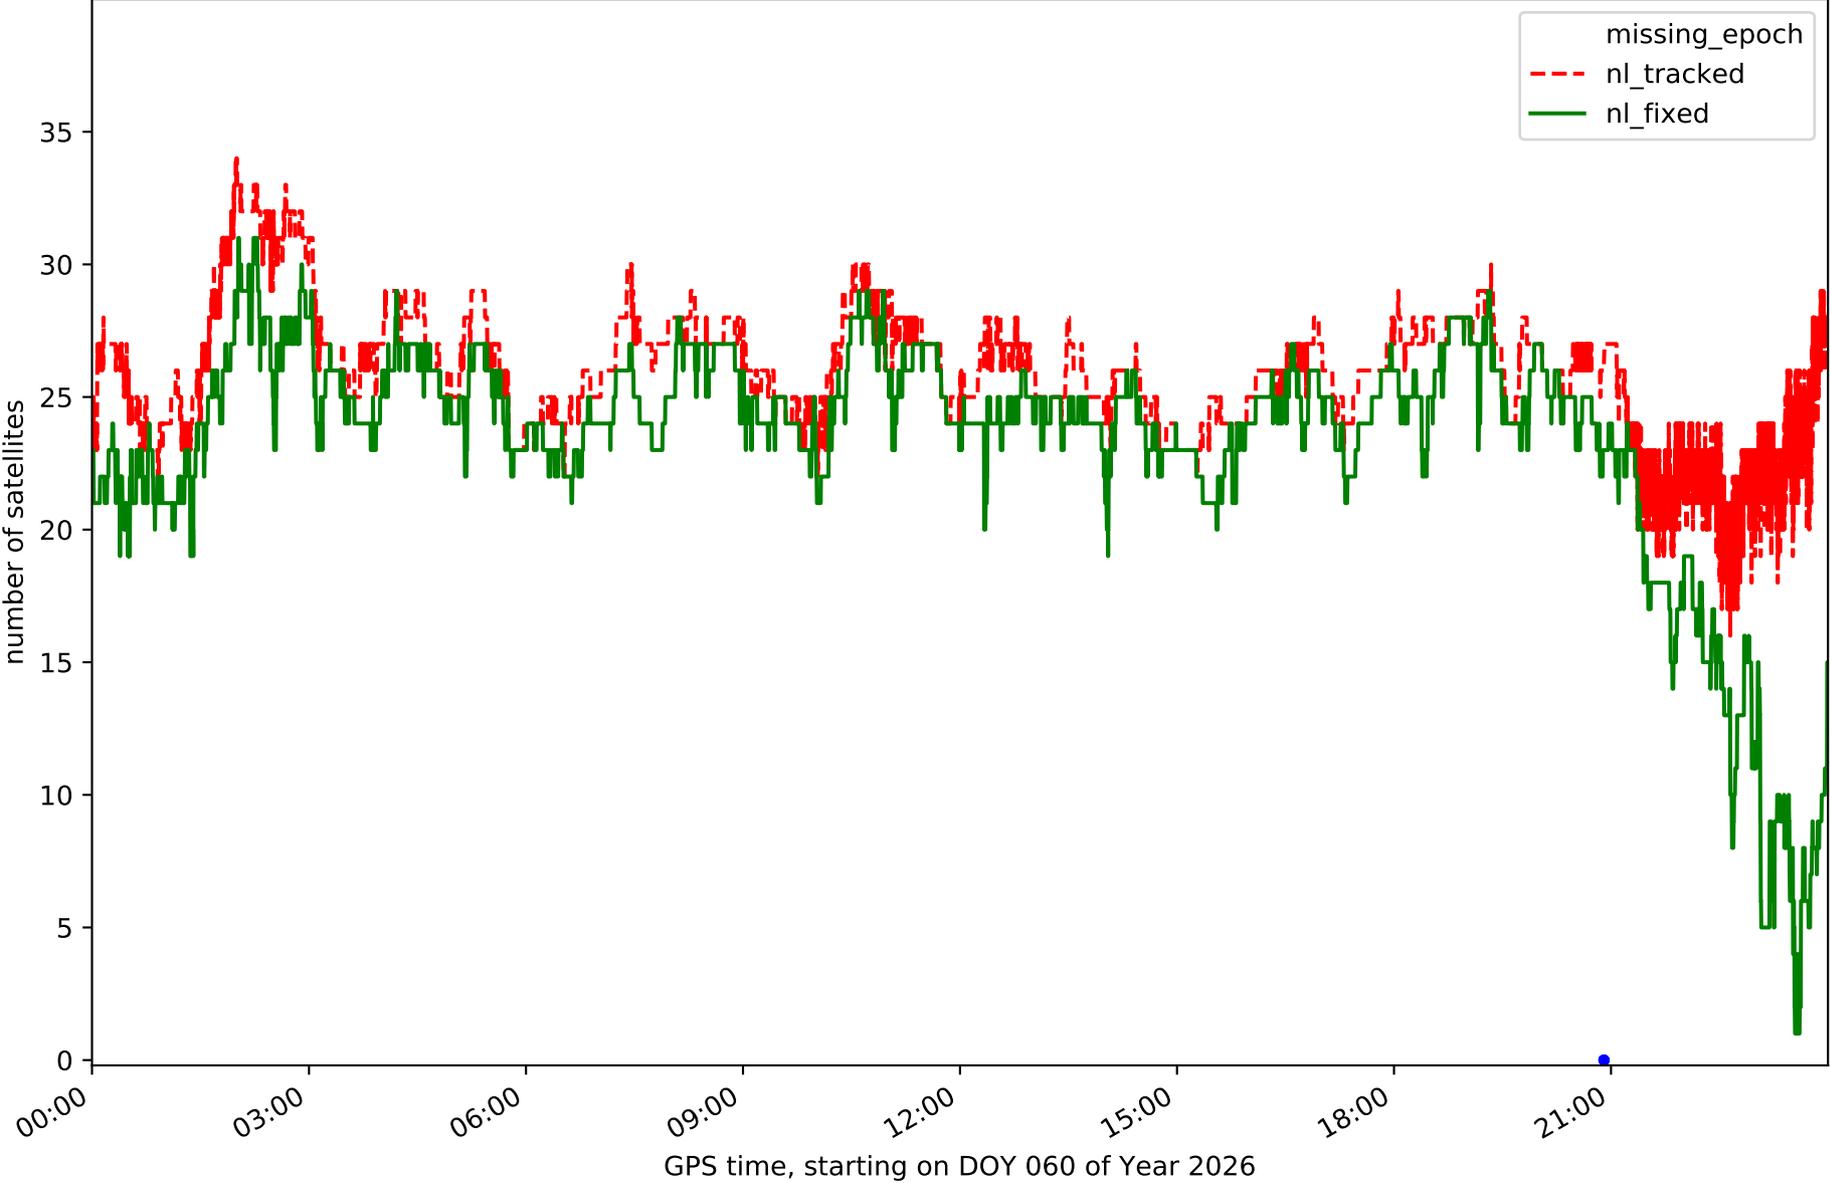


Station TE11 in network N32T

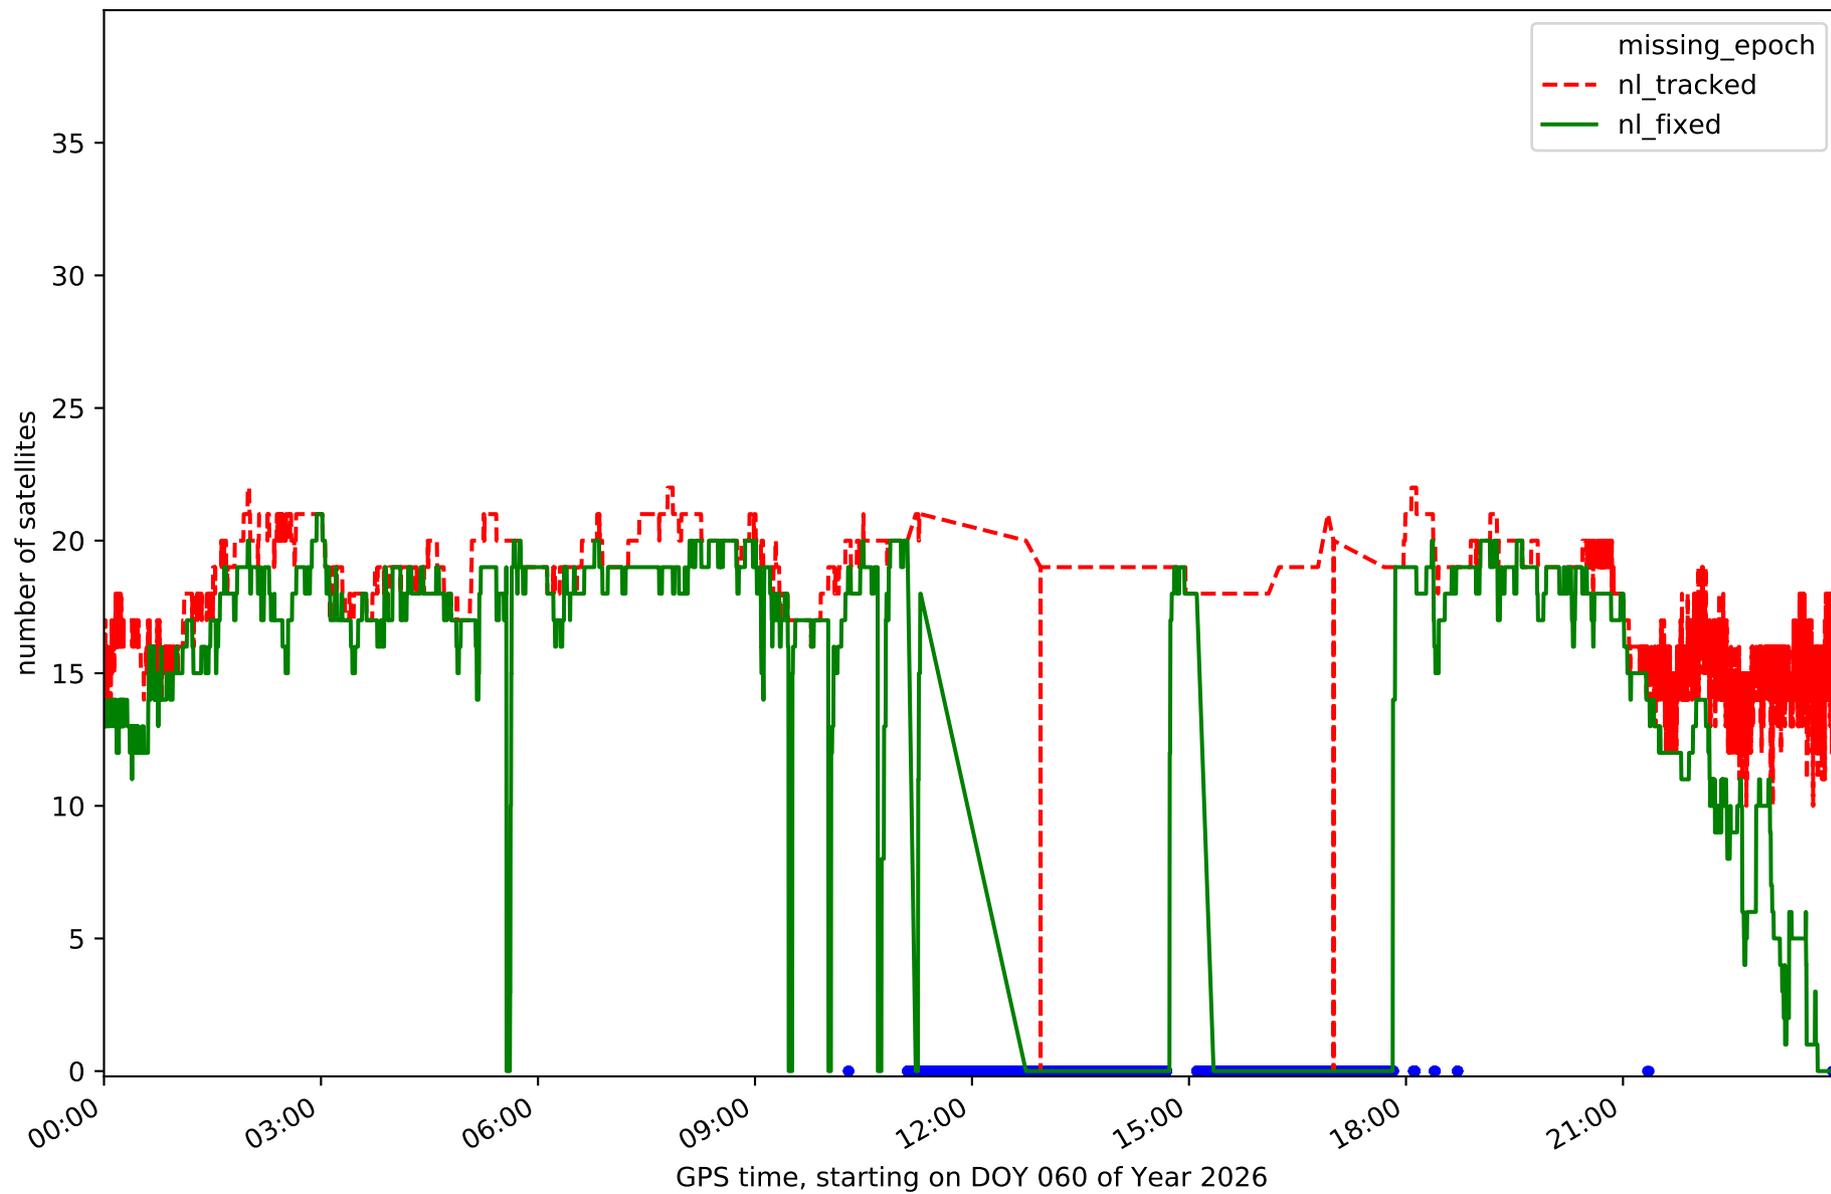


RefCheck for station EH01 in network N32T

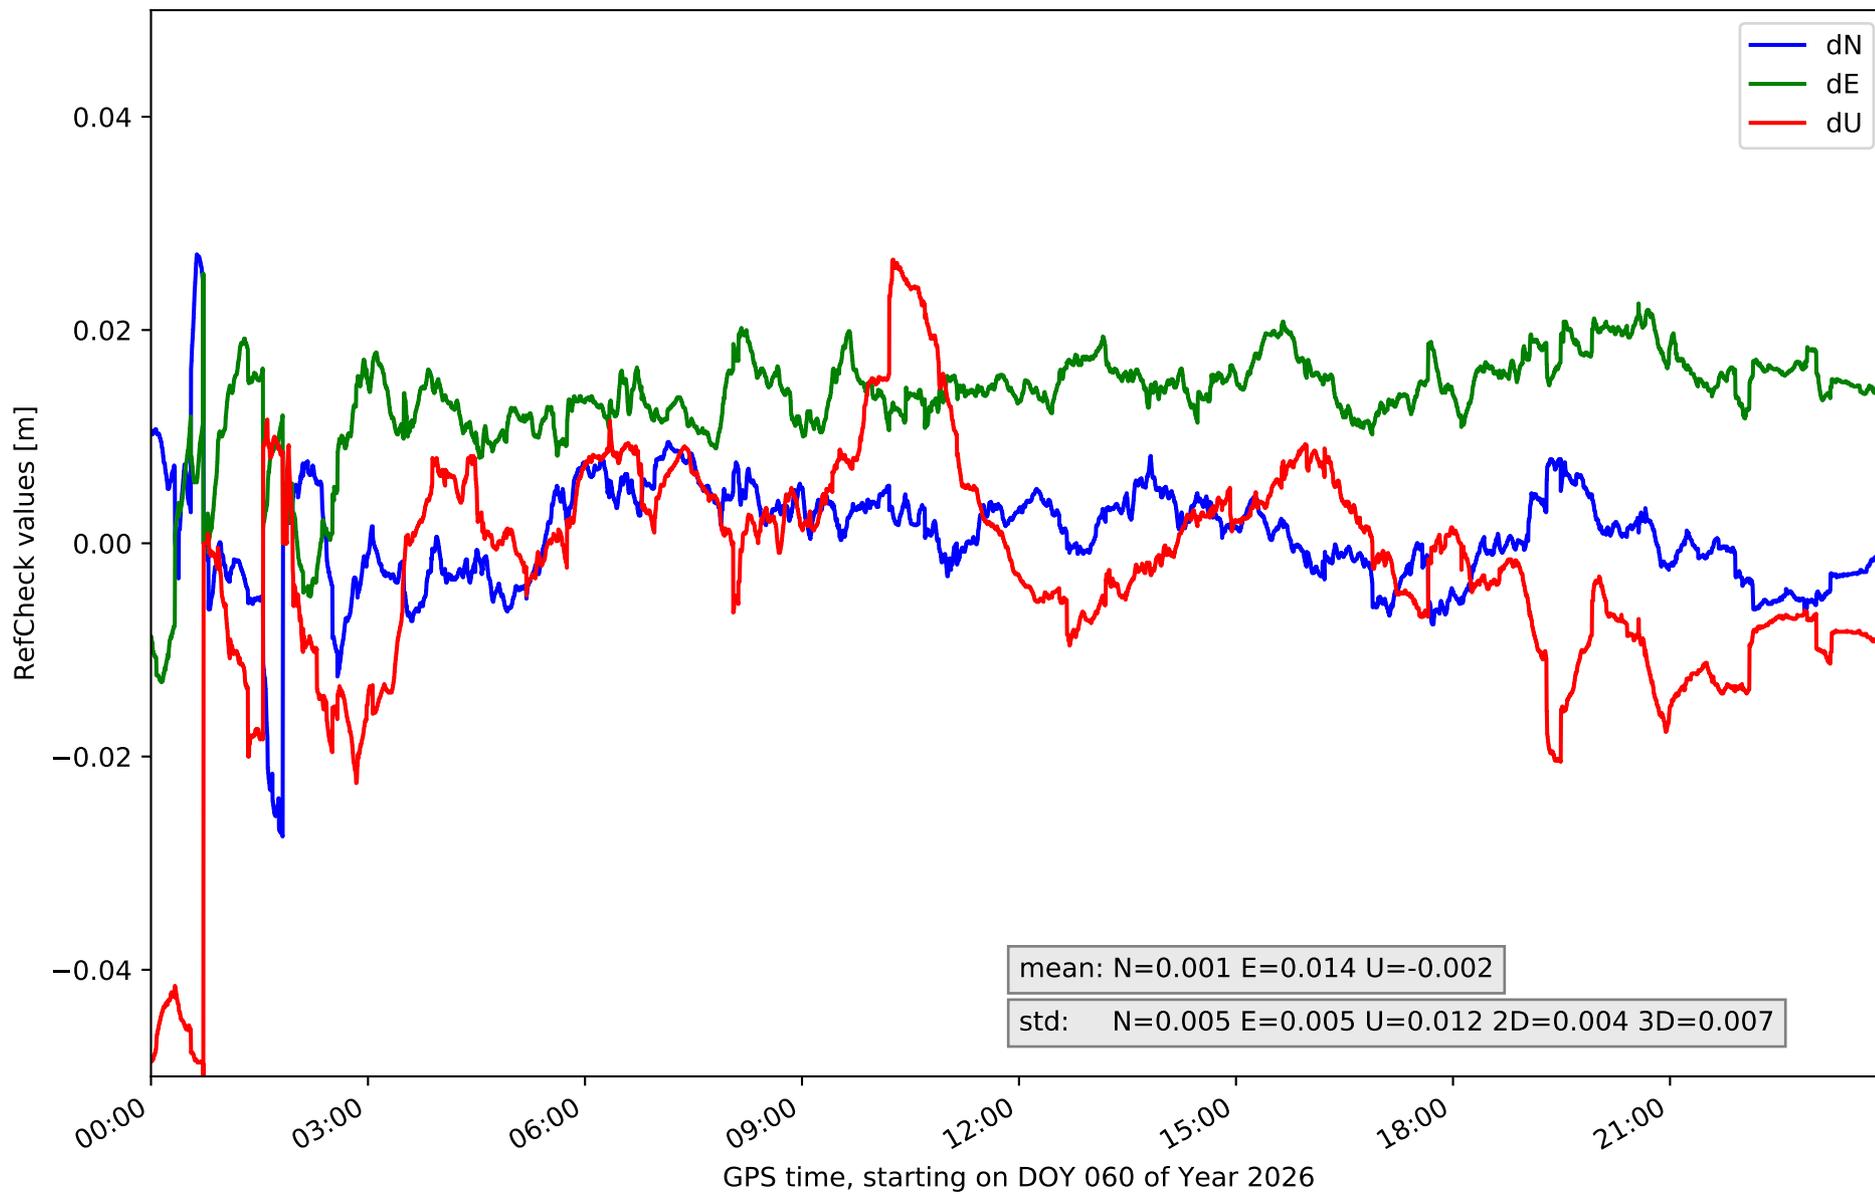


RefCheck for station EH02 in network N32T

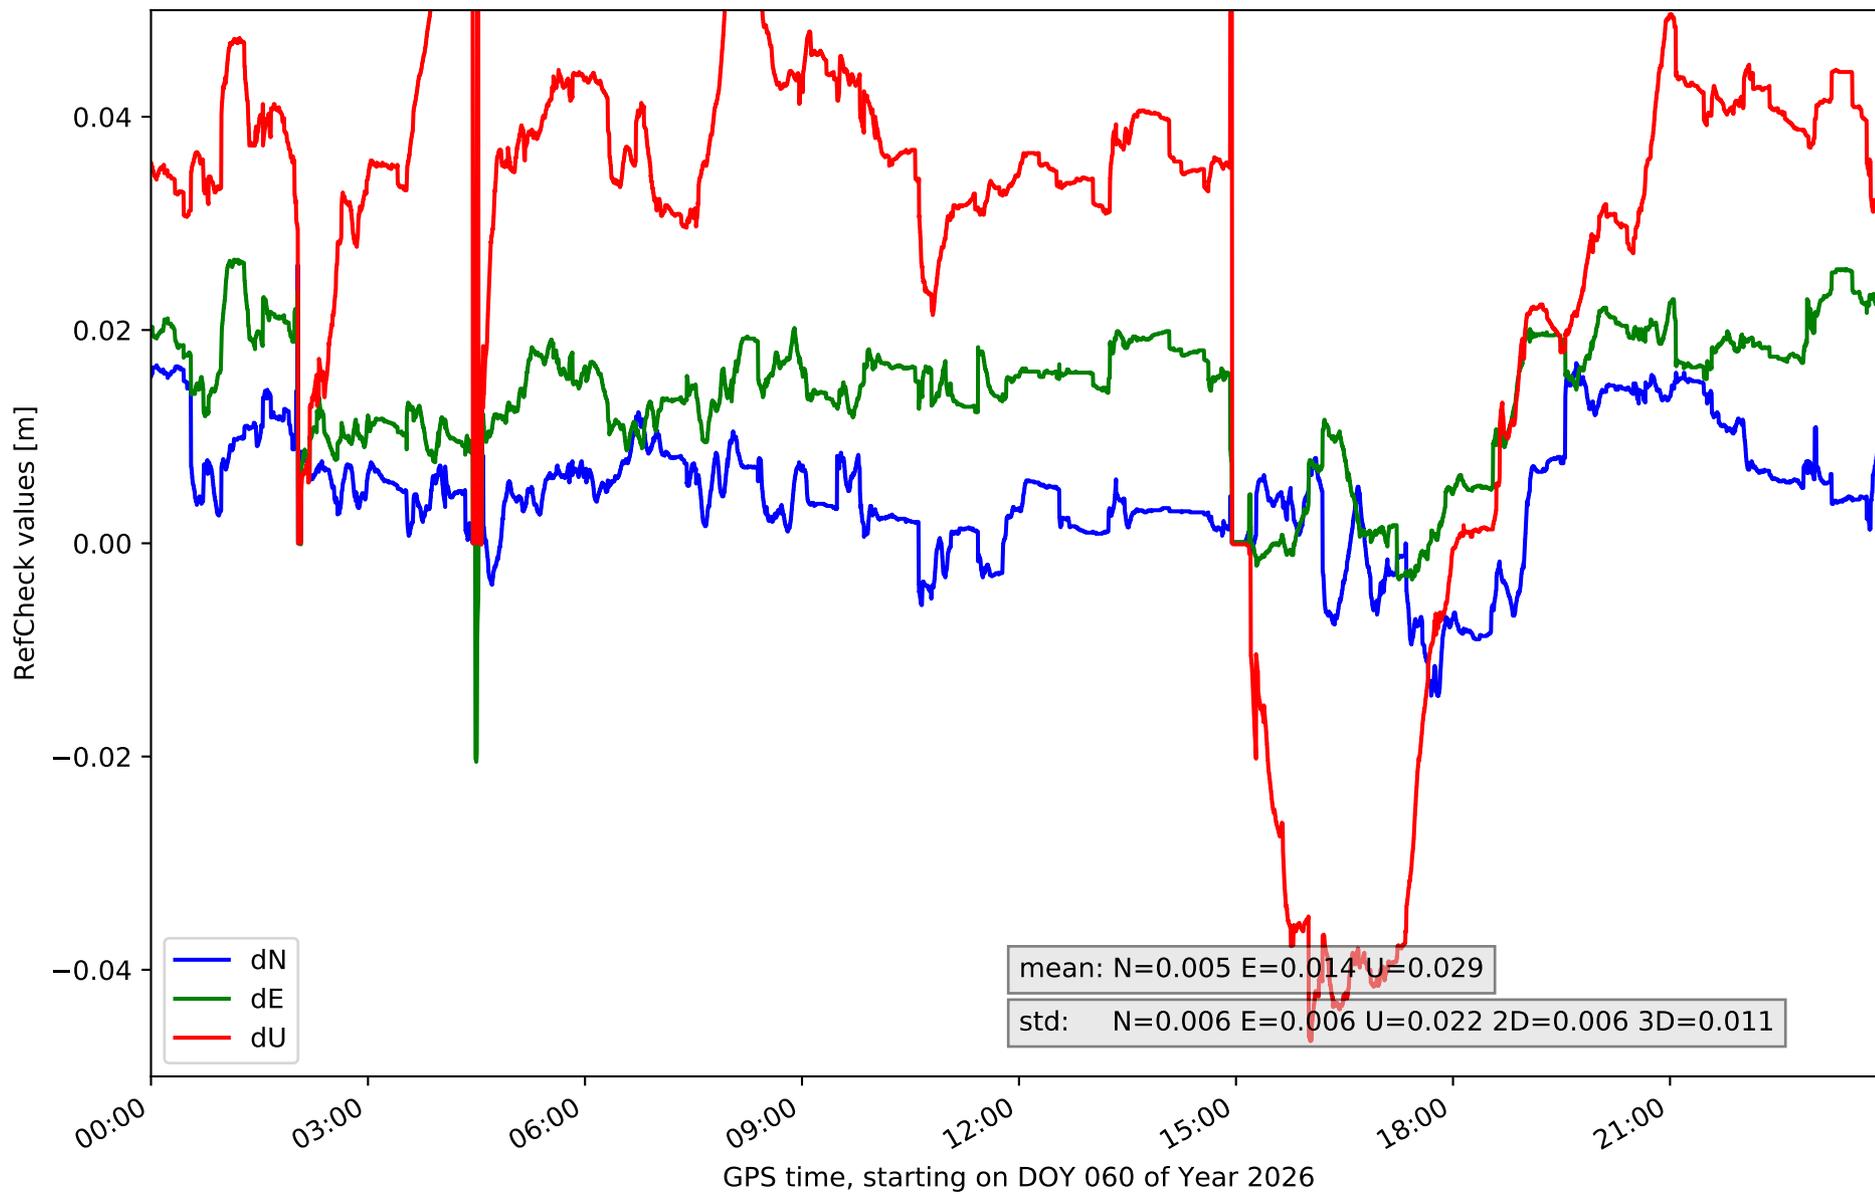


RefCheck for station GOM1 in network N32T

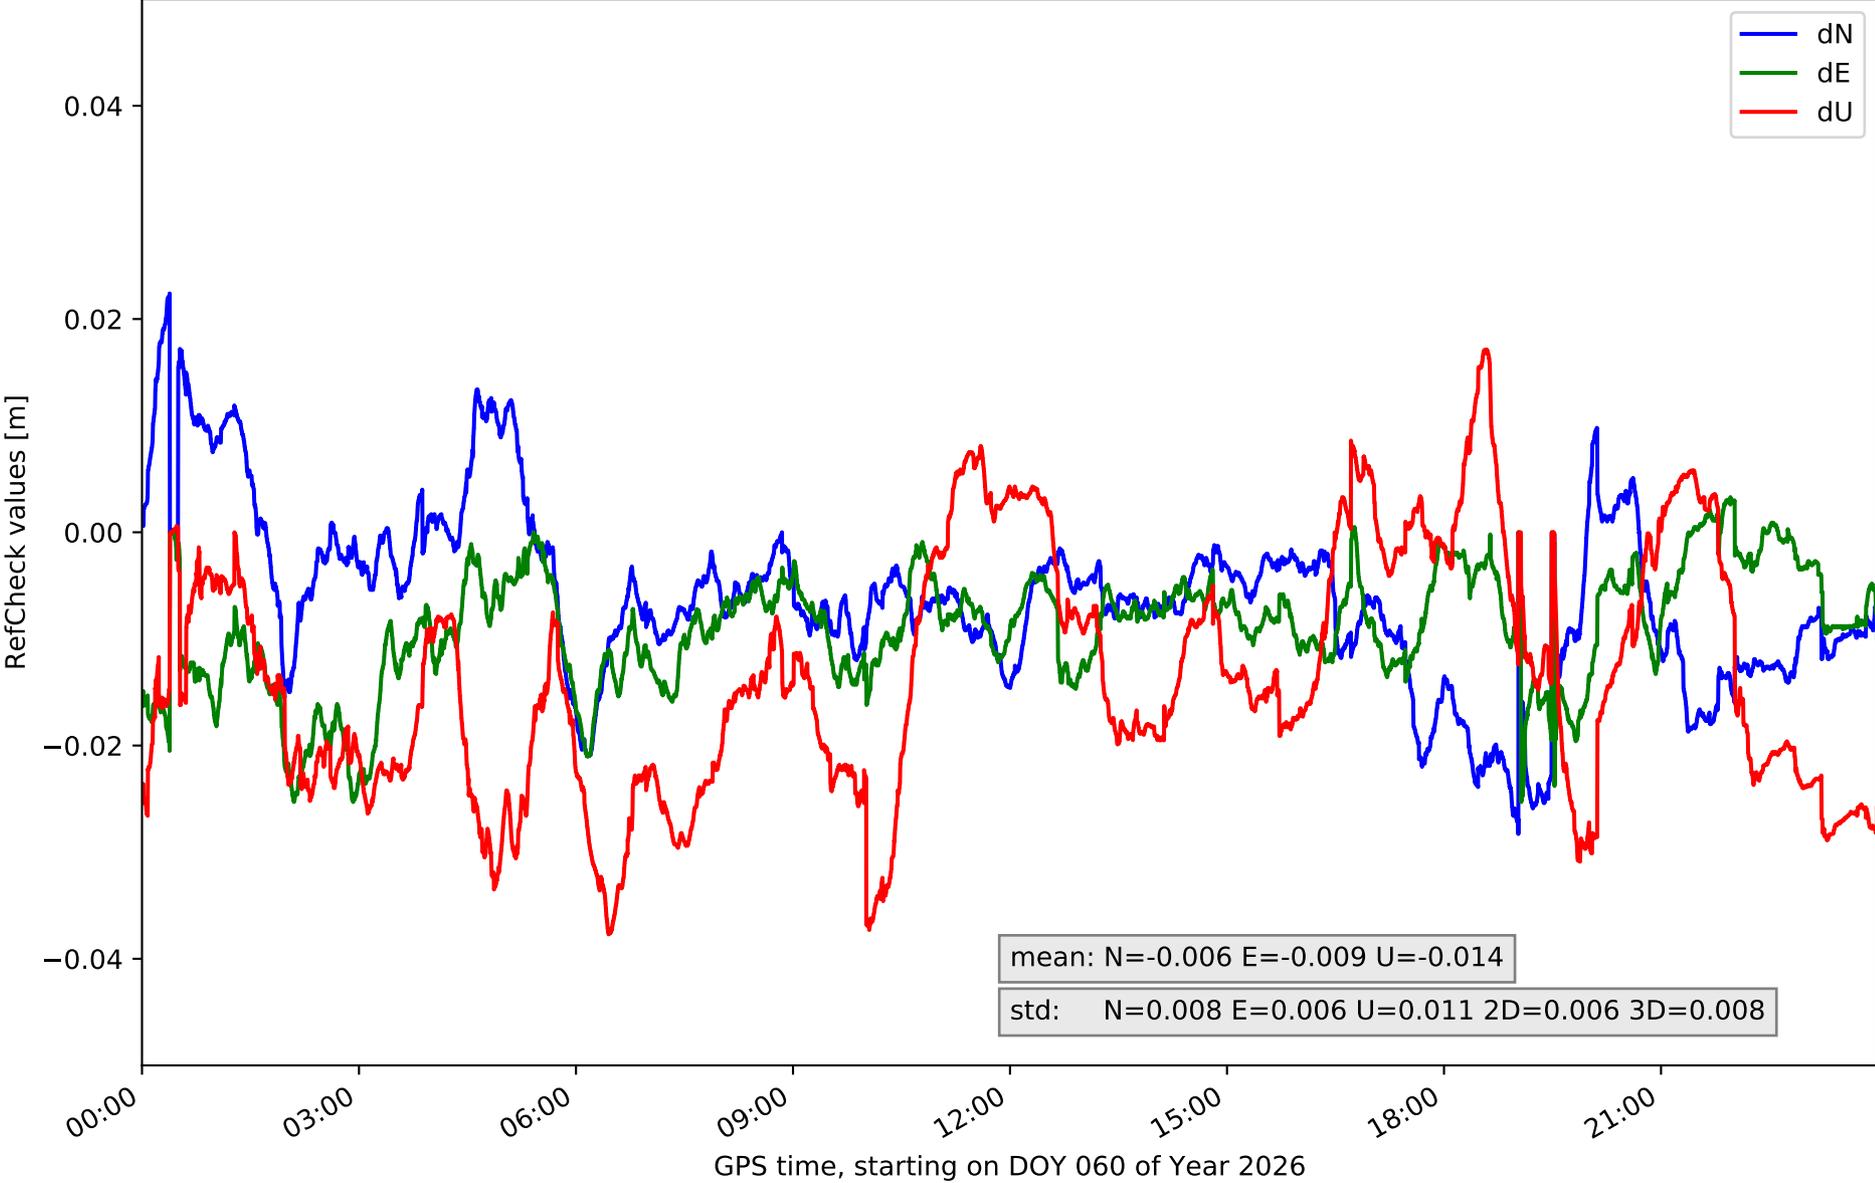


RefCheck for station GOME in network N32T

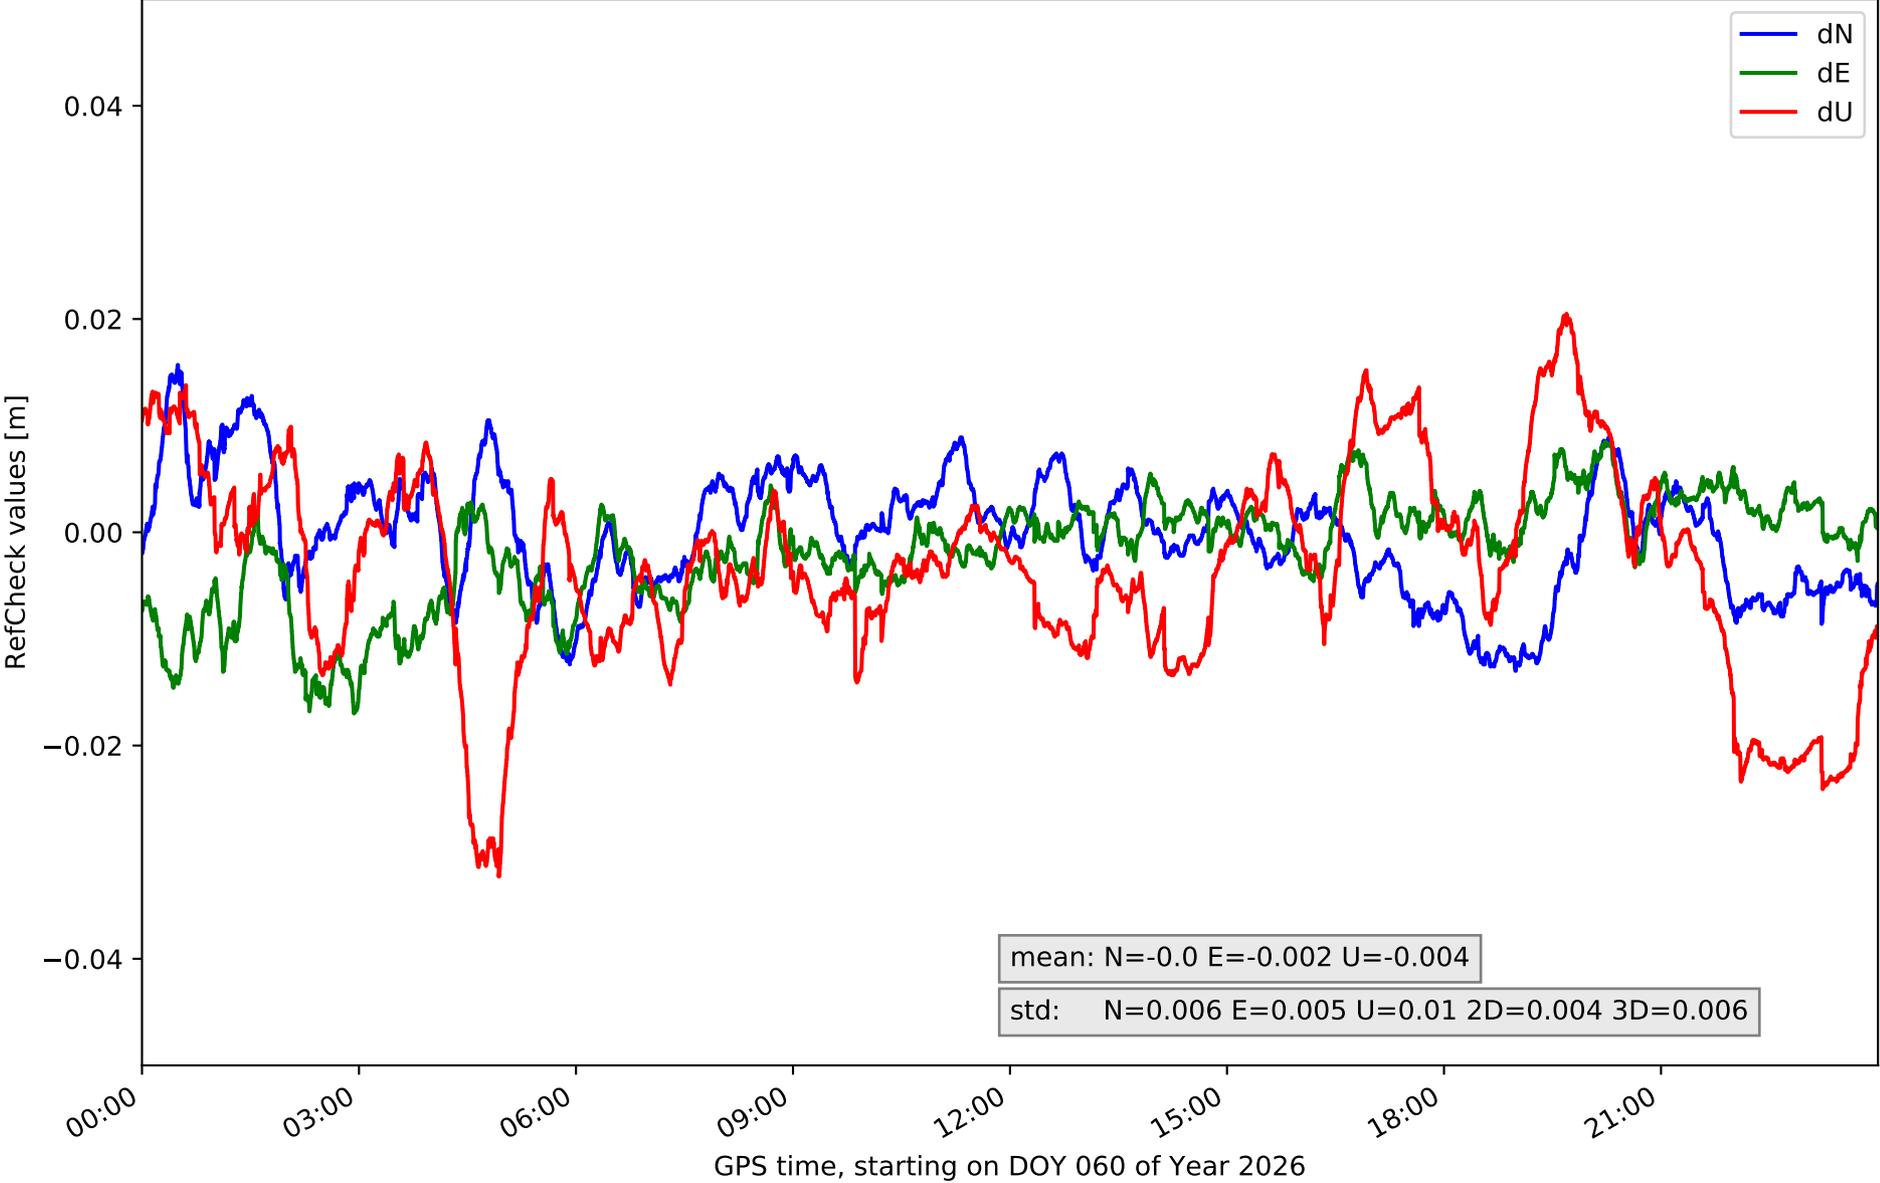


RefCheck for station IZAN in network N32T

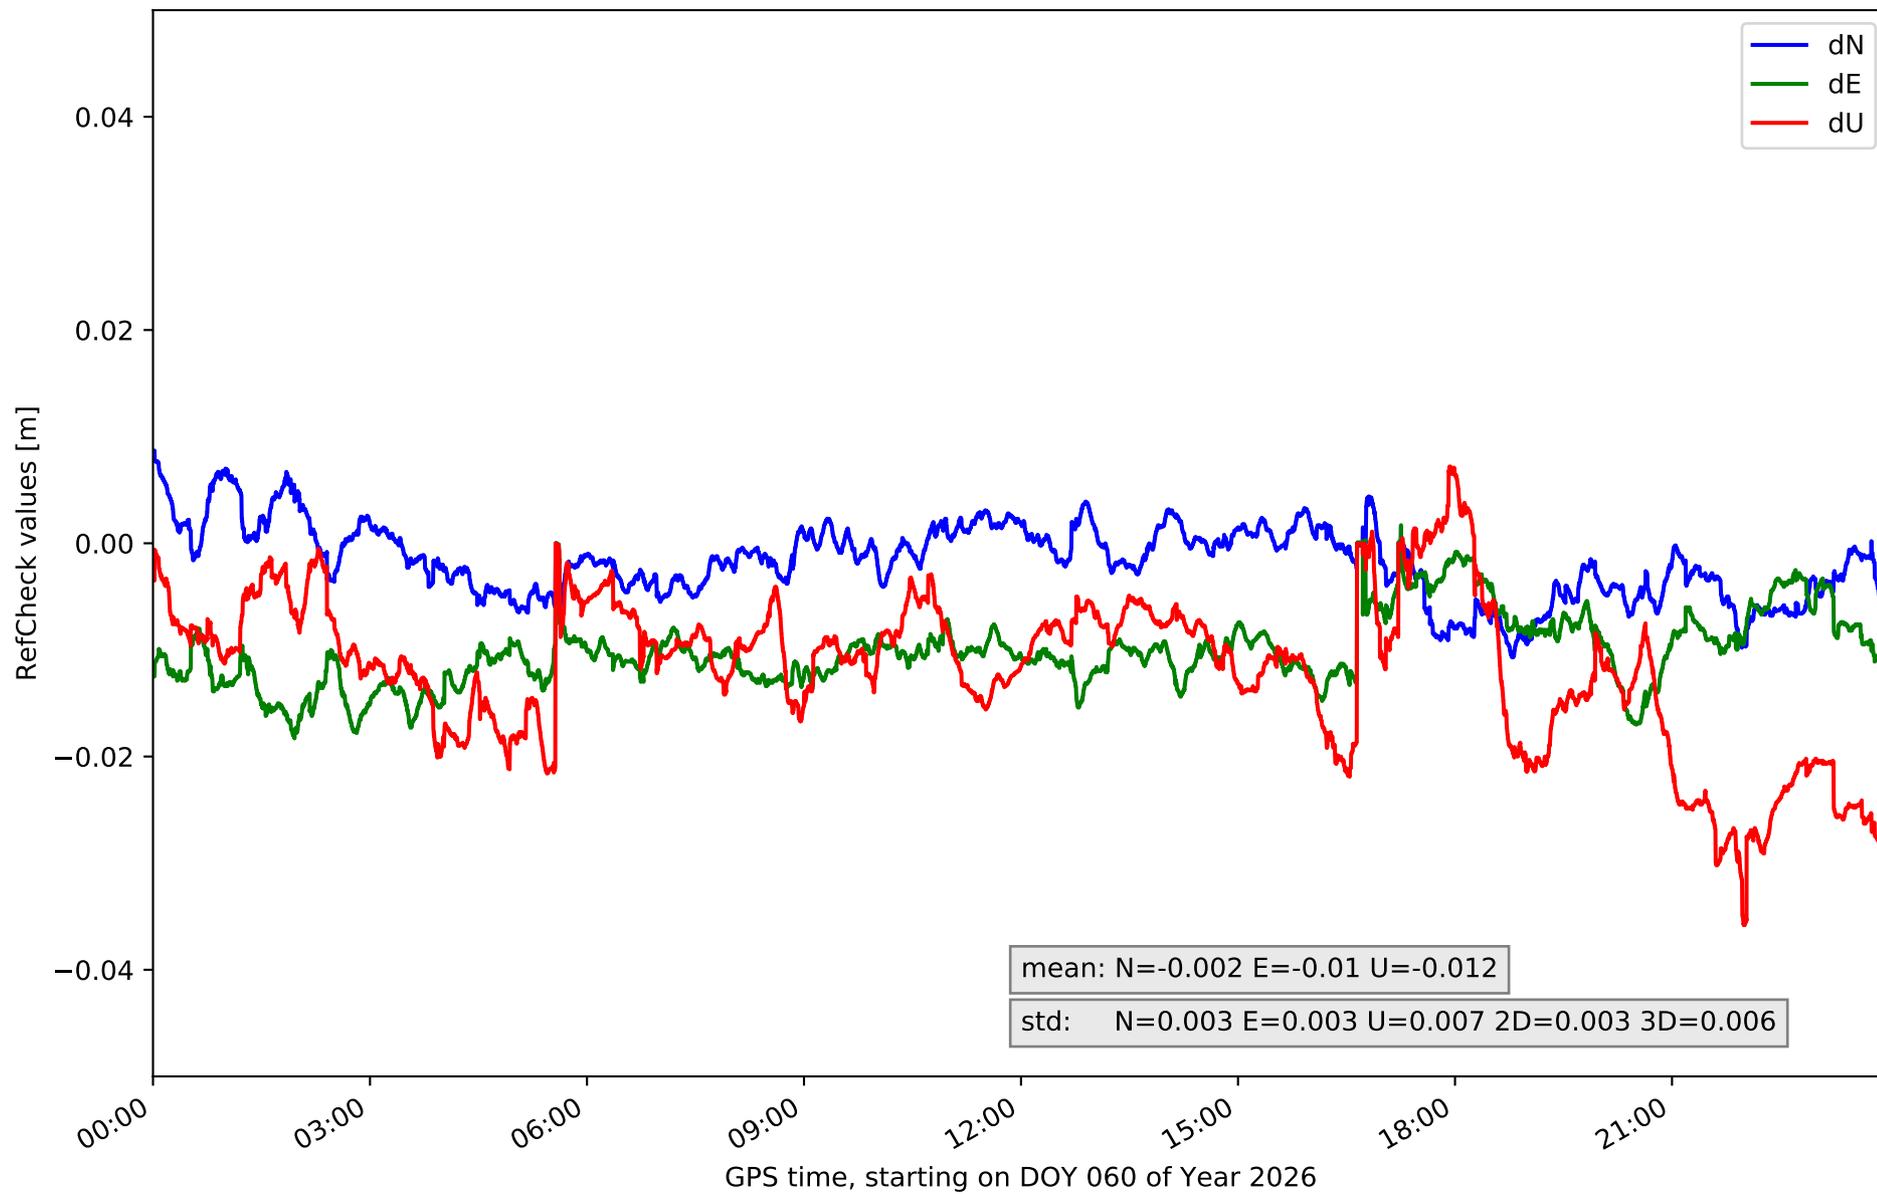


RefCheck for station LP01 in network N32T

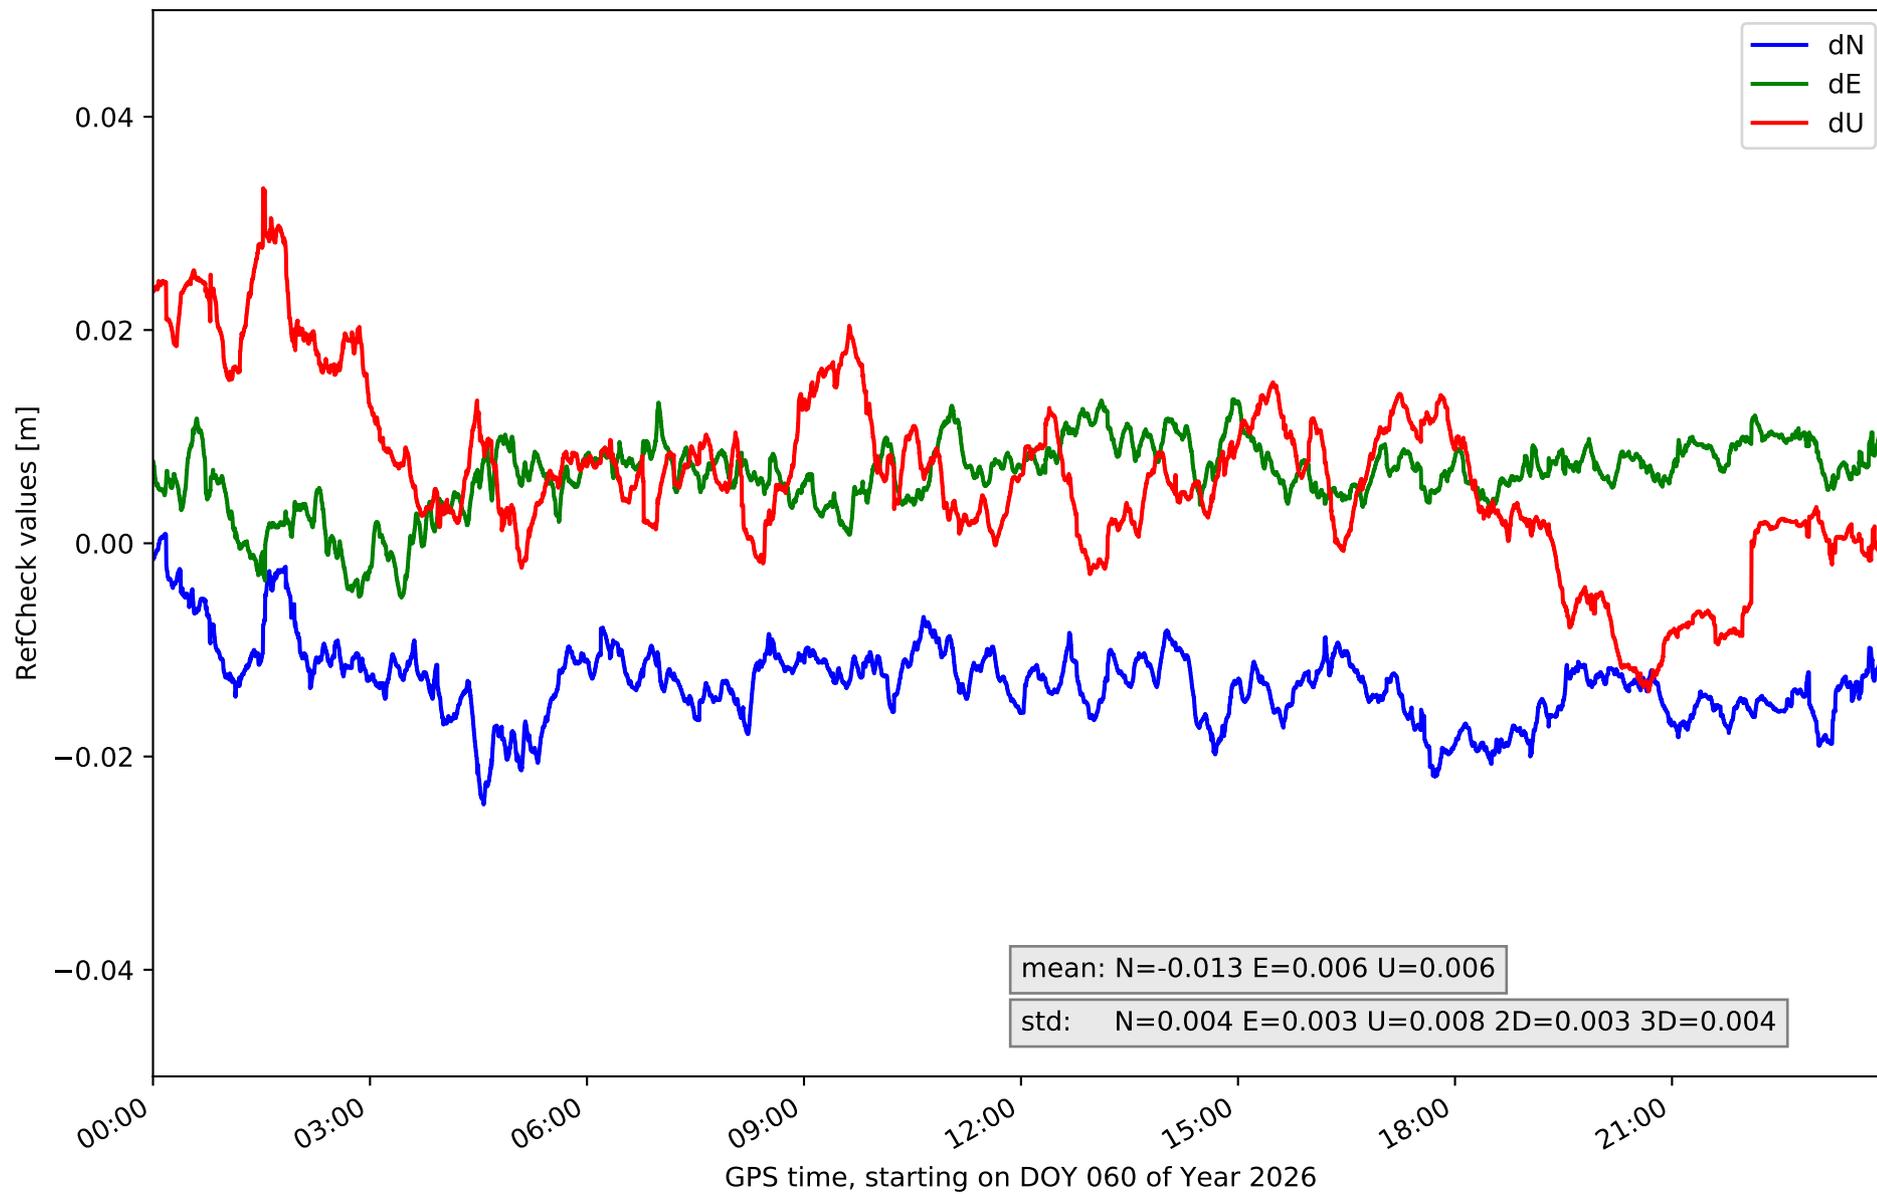


RefCheck for station LP03 in network N32T

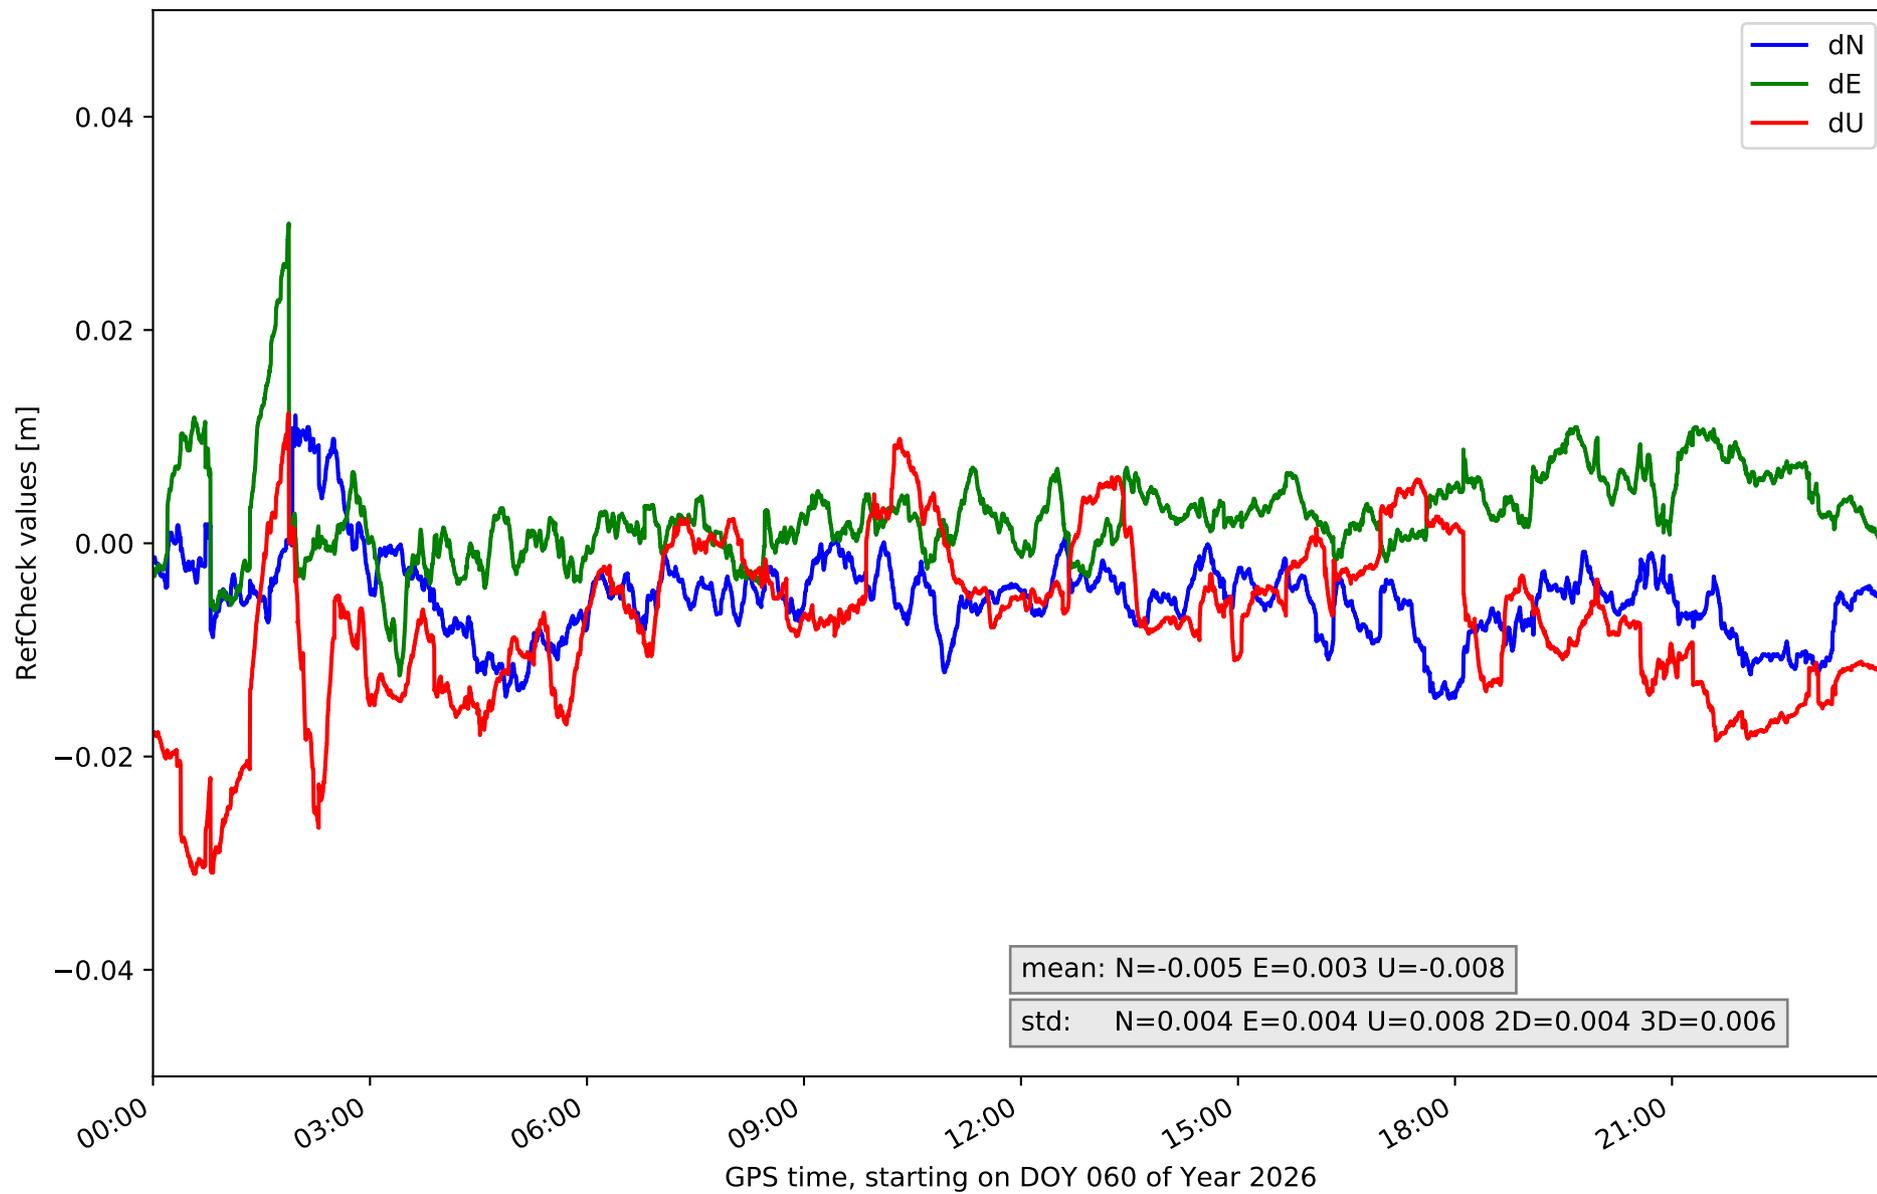


RefCheck for station LPAL in network N32T

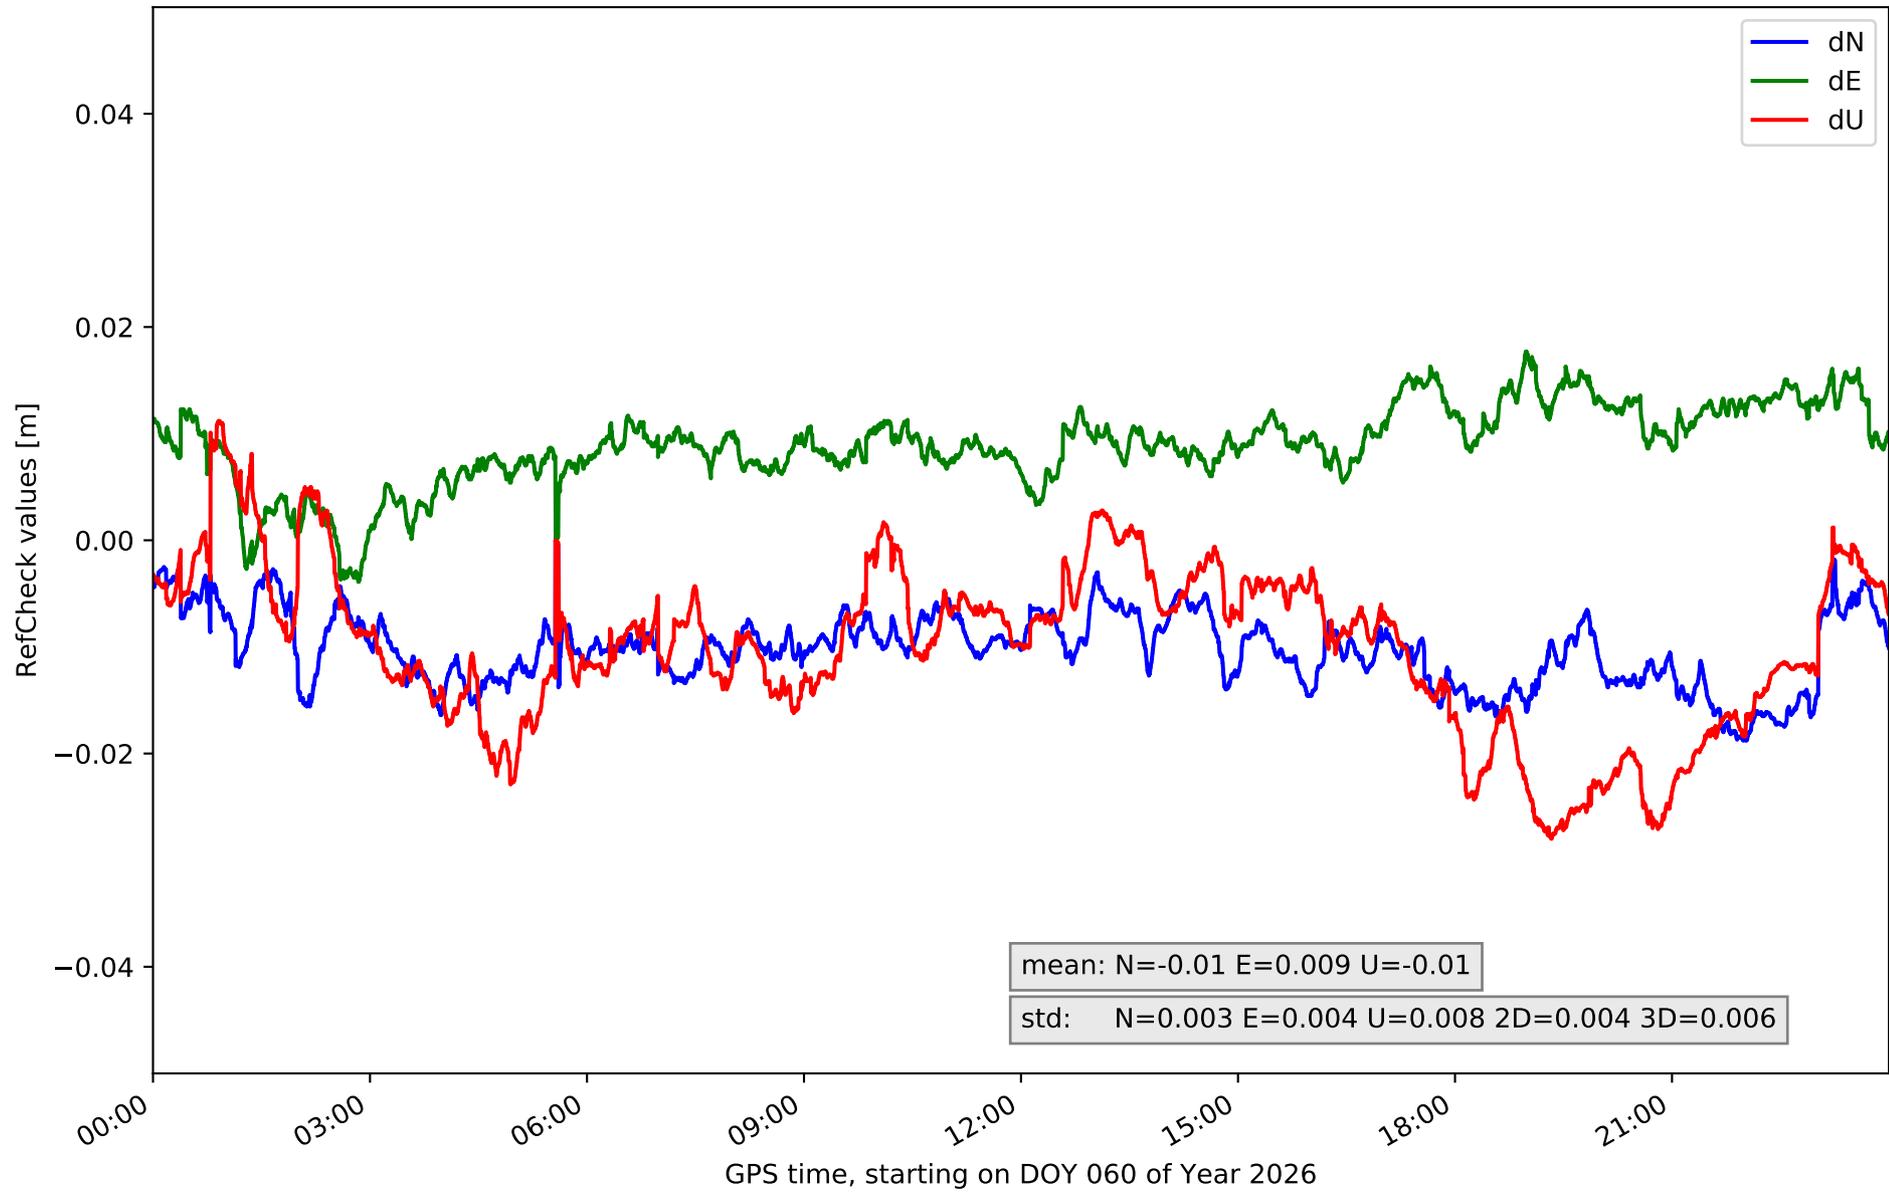


RefCheck for station LRES in network N32T

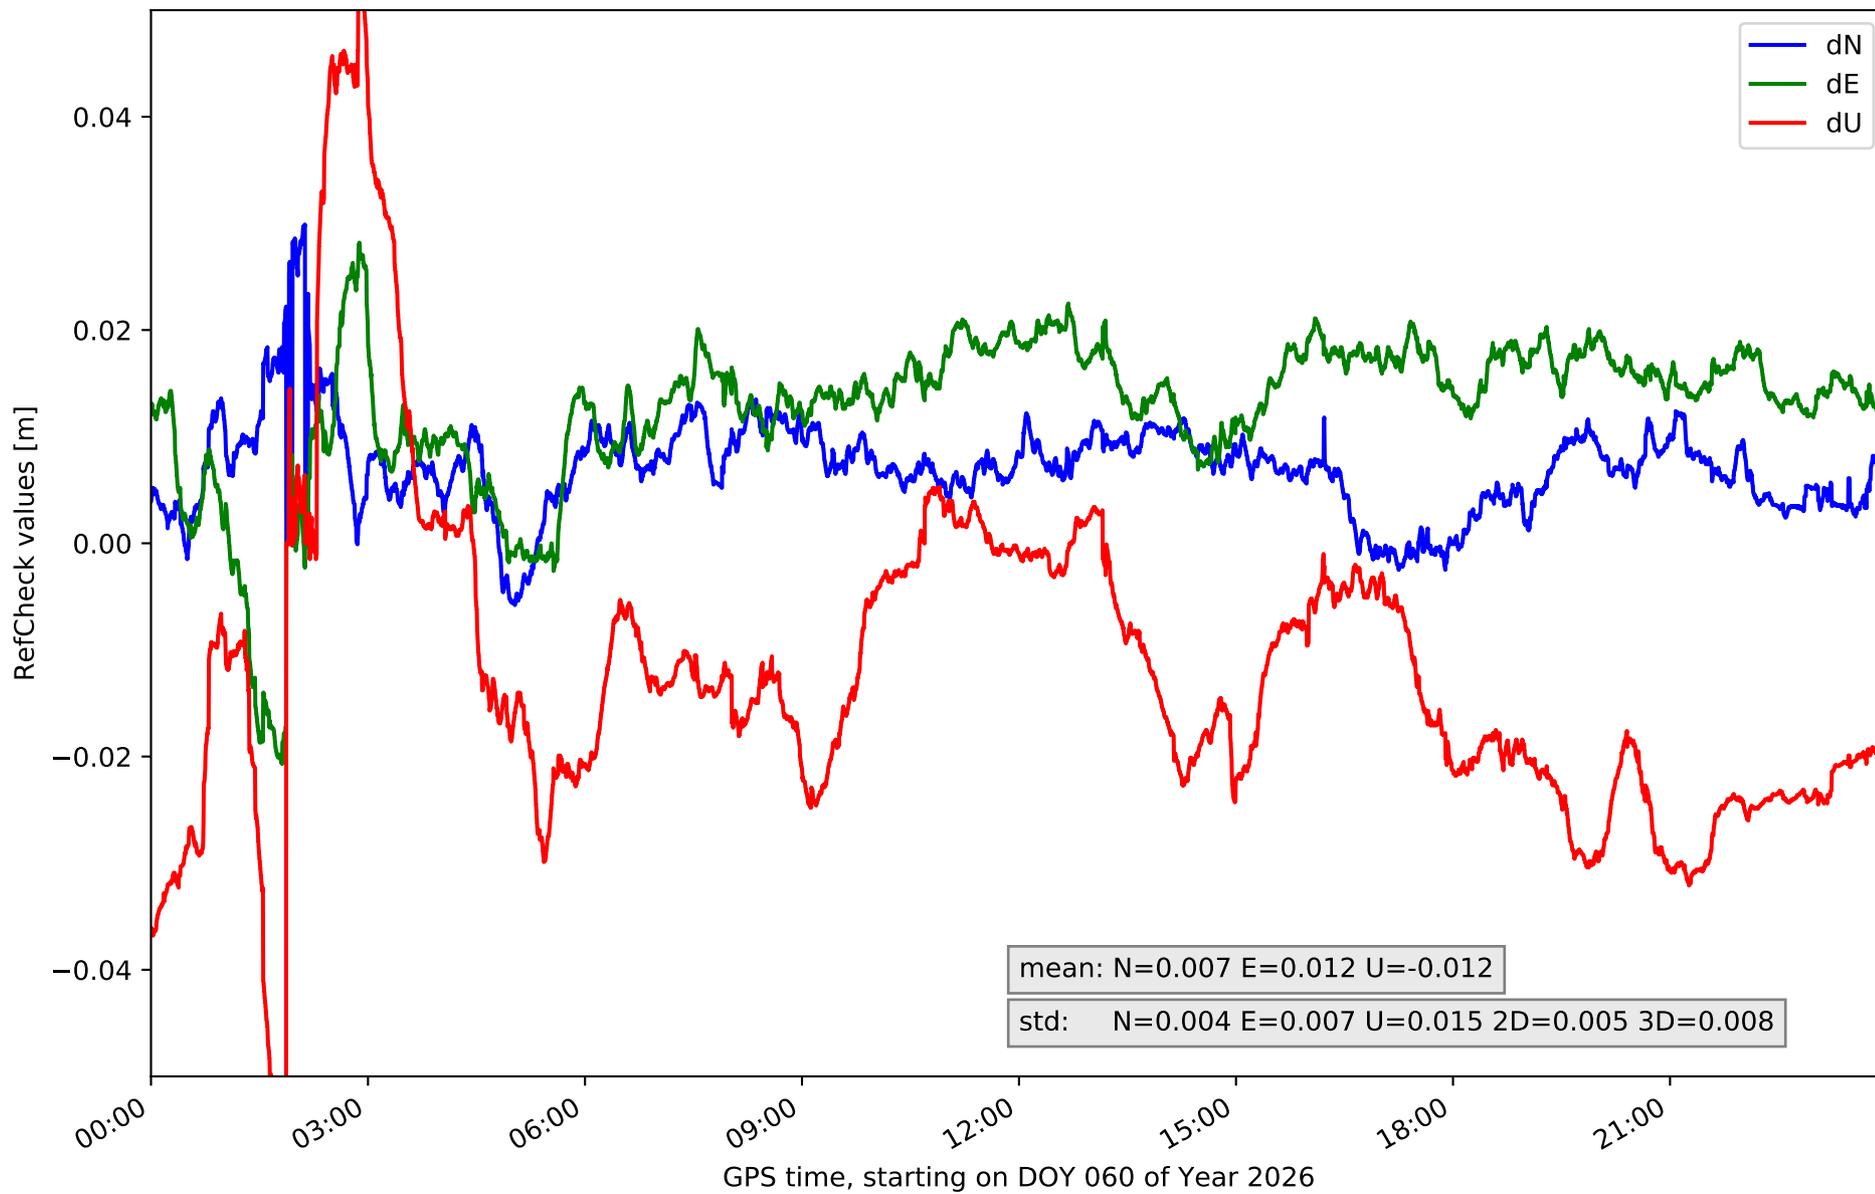


RefCheck for station TN01 in network N32T

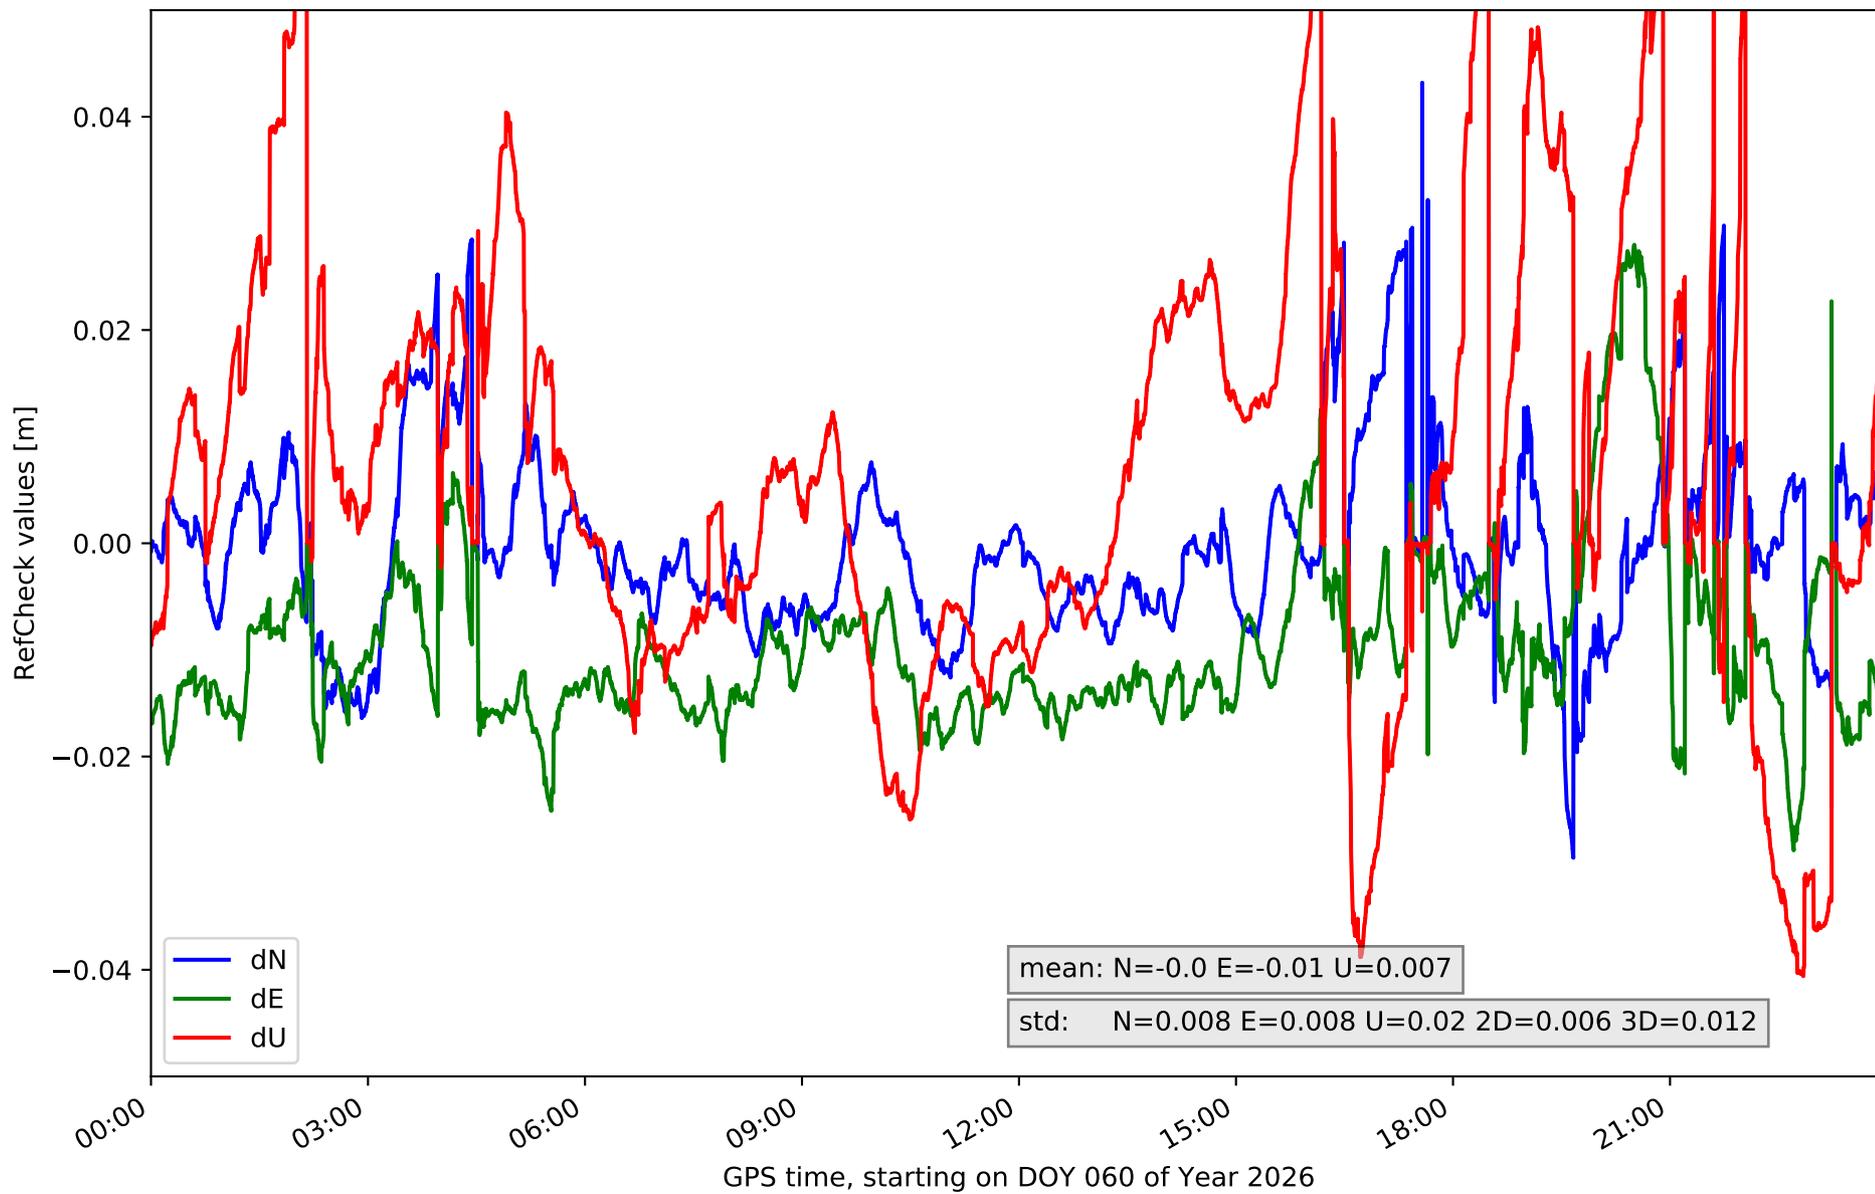


RefCheck for station TN02 in network N32T

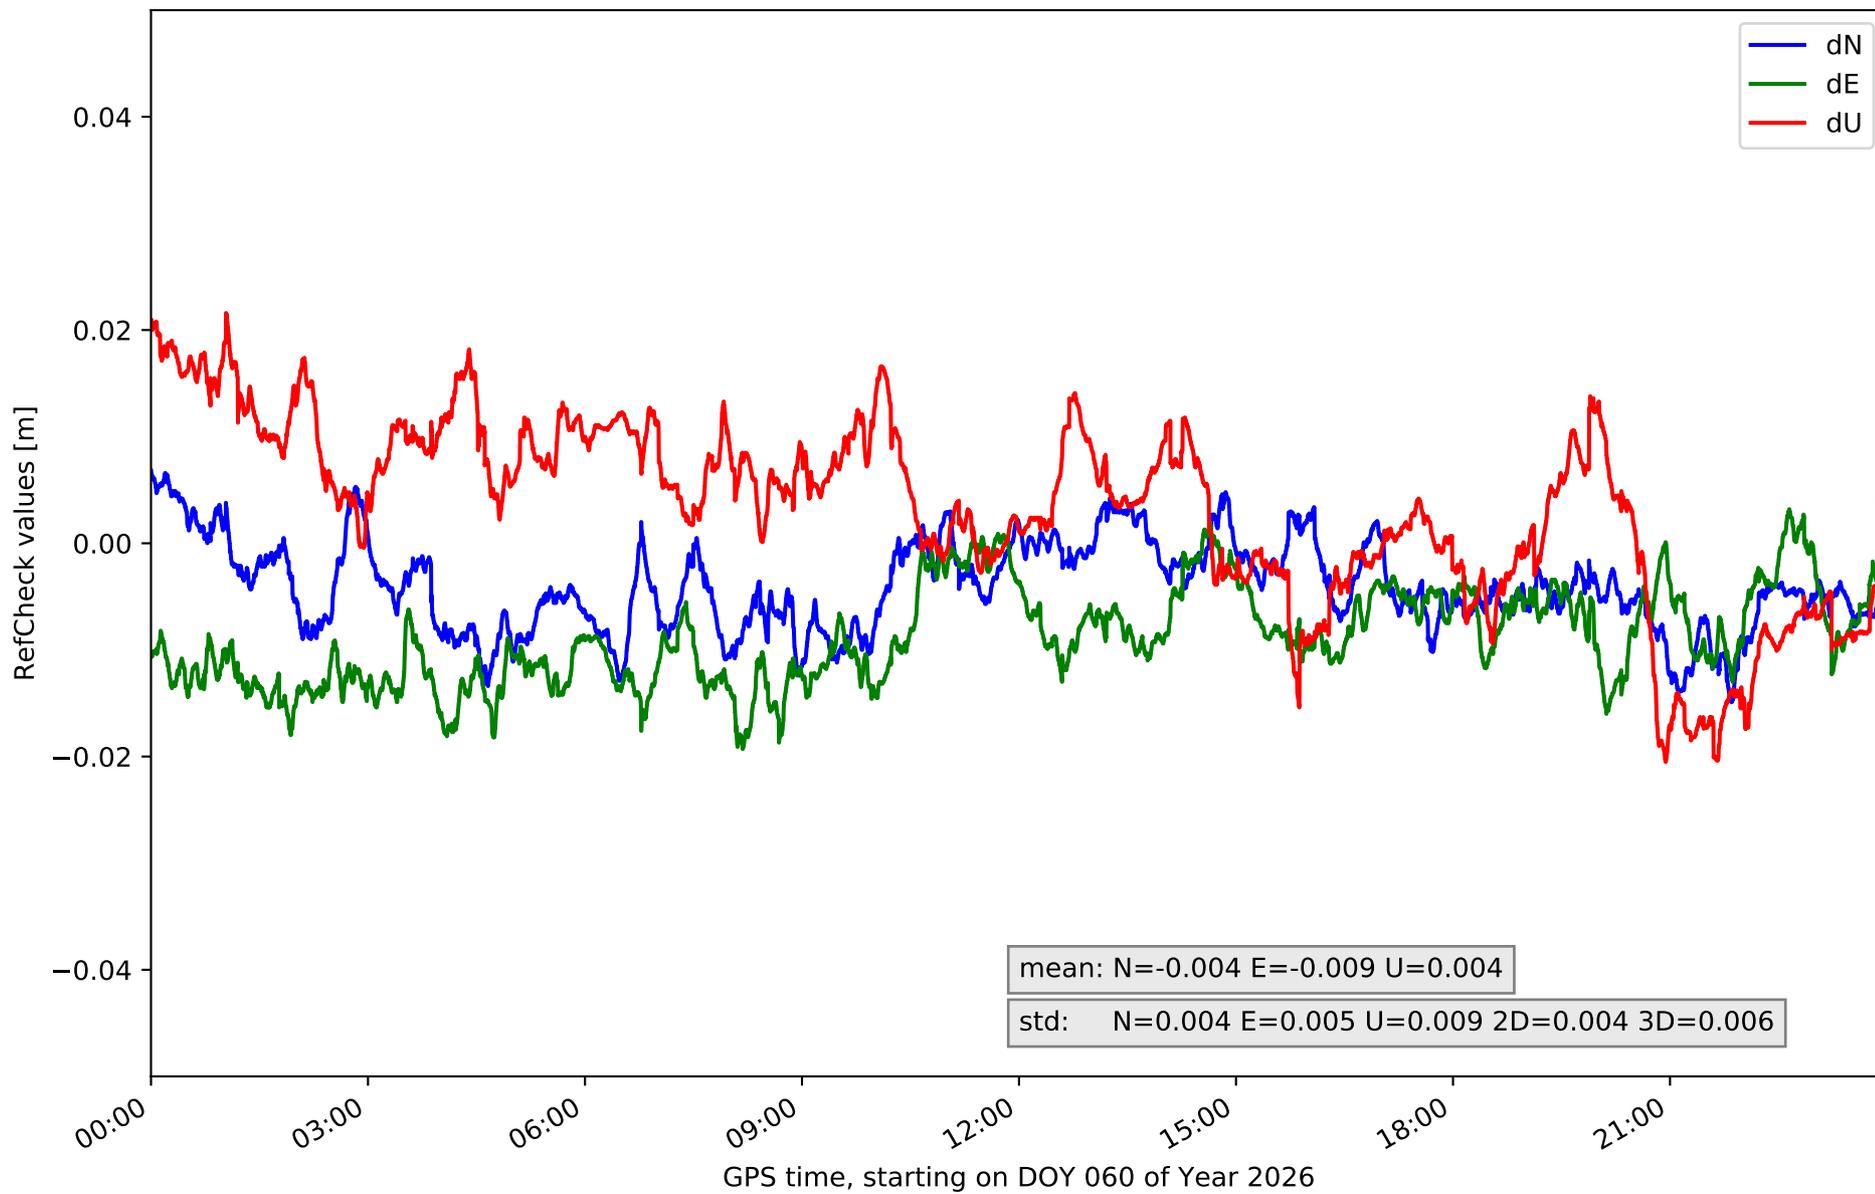


RefCheck for station TN03 in network N32T

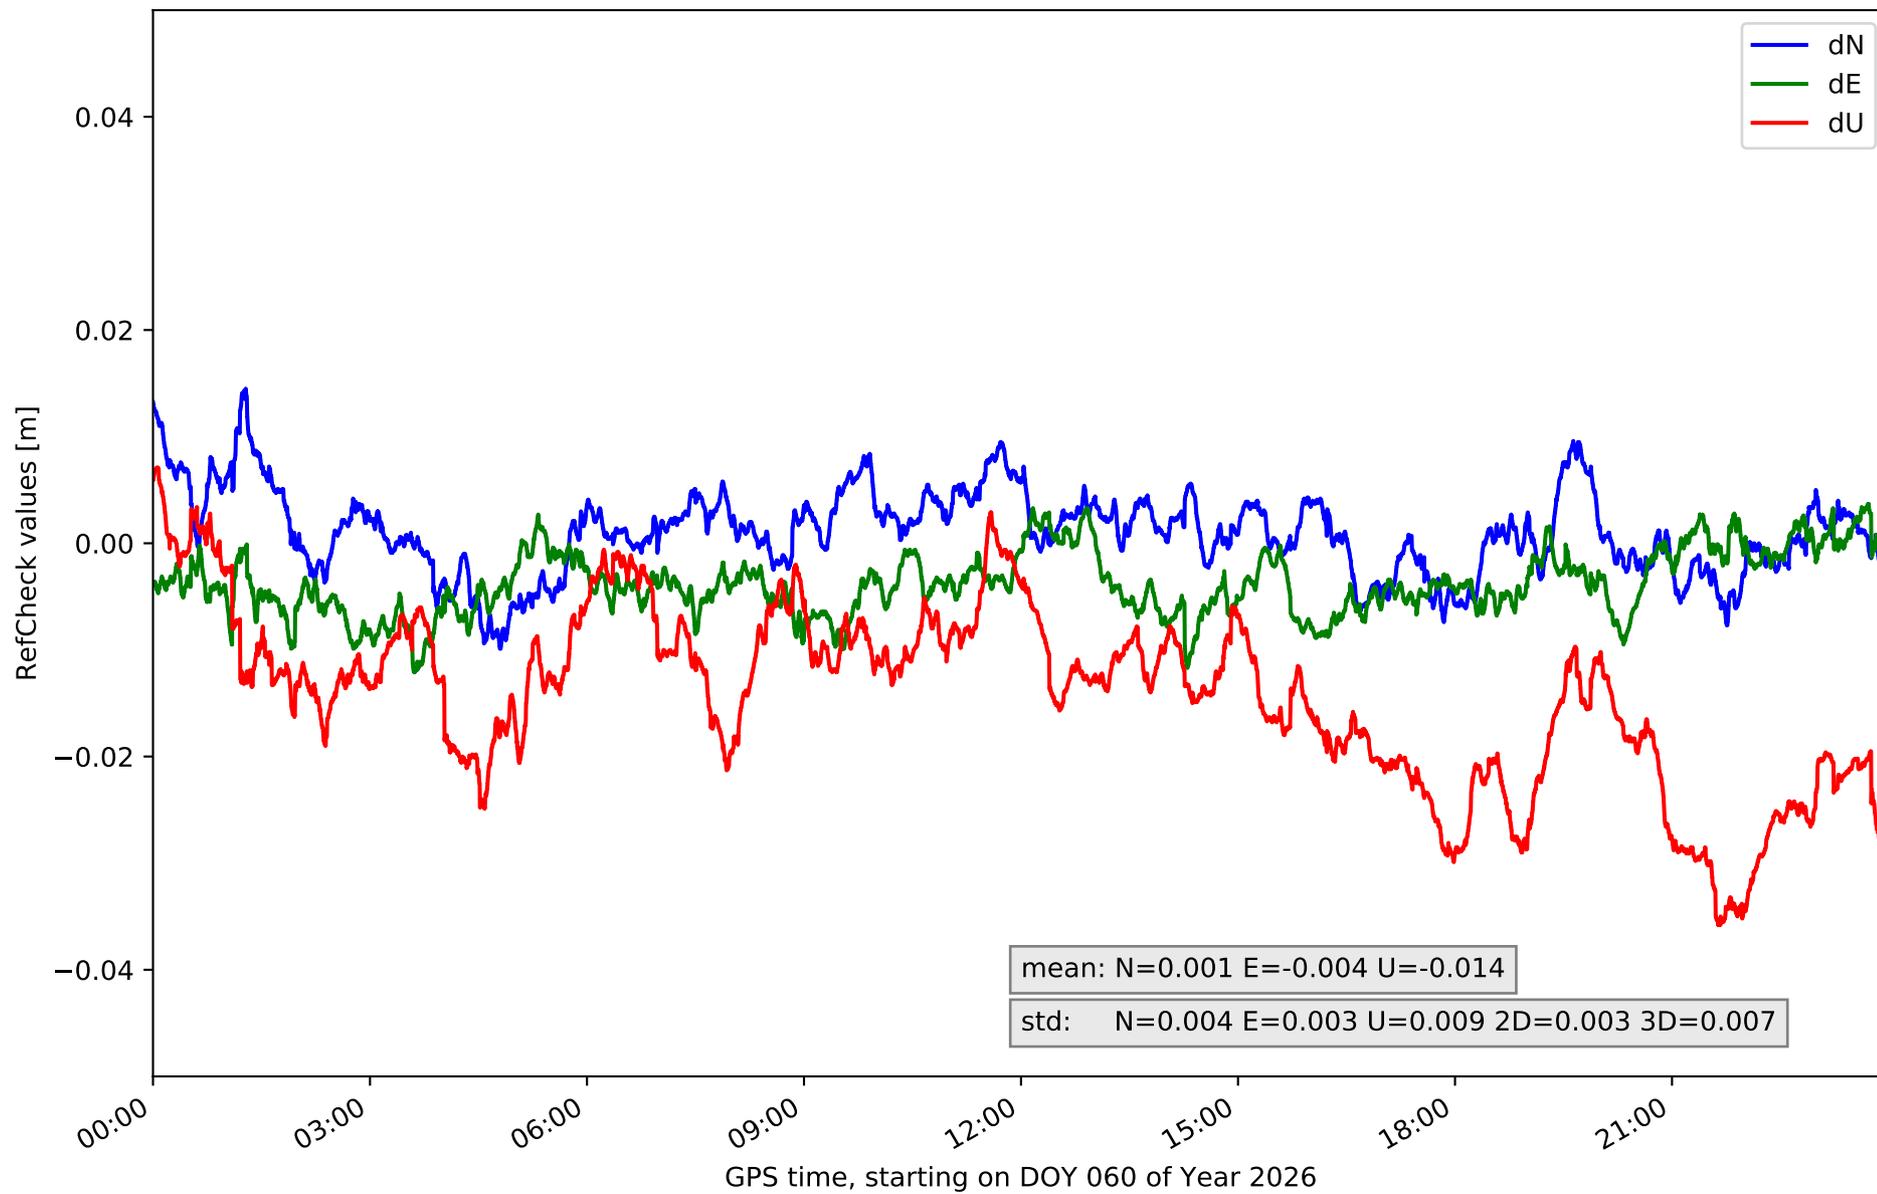


RefCheck for station TN06 in network N32T

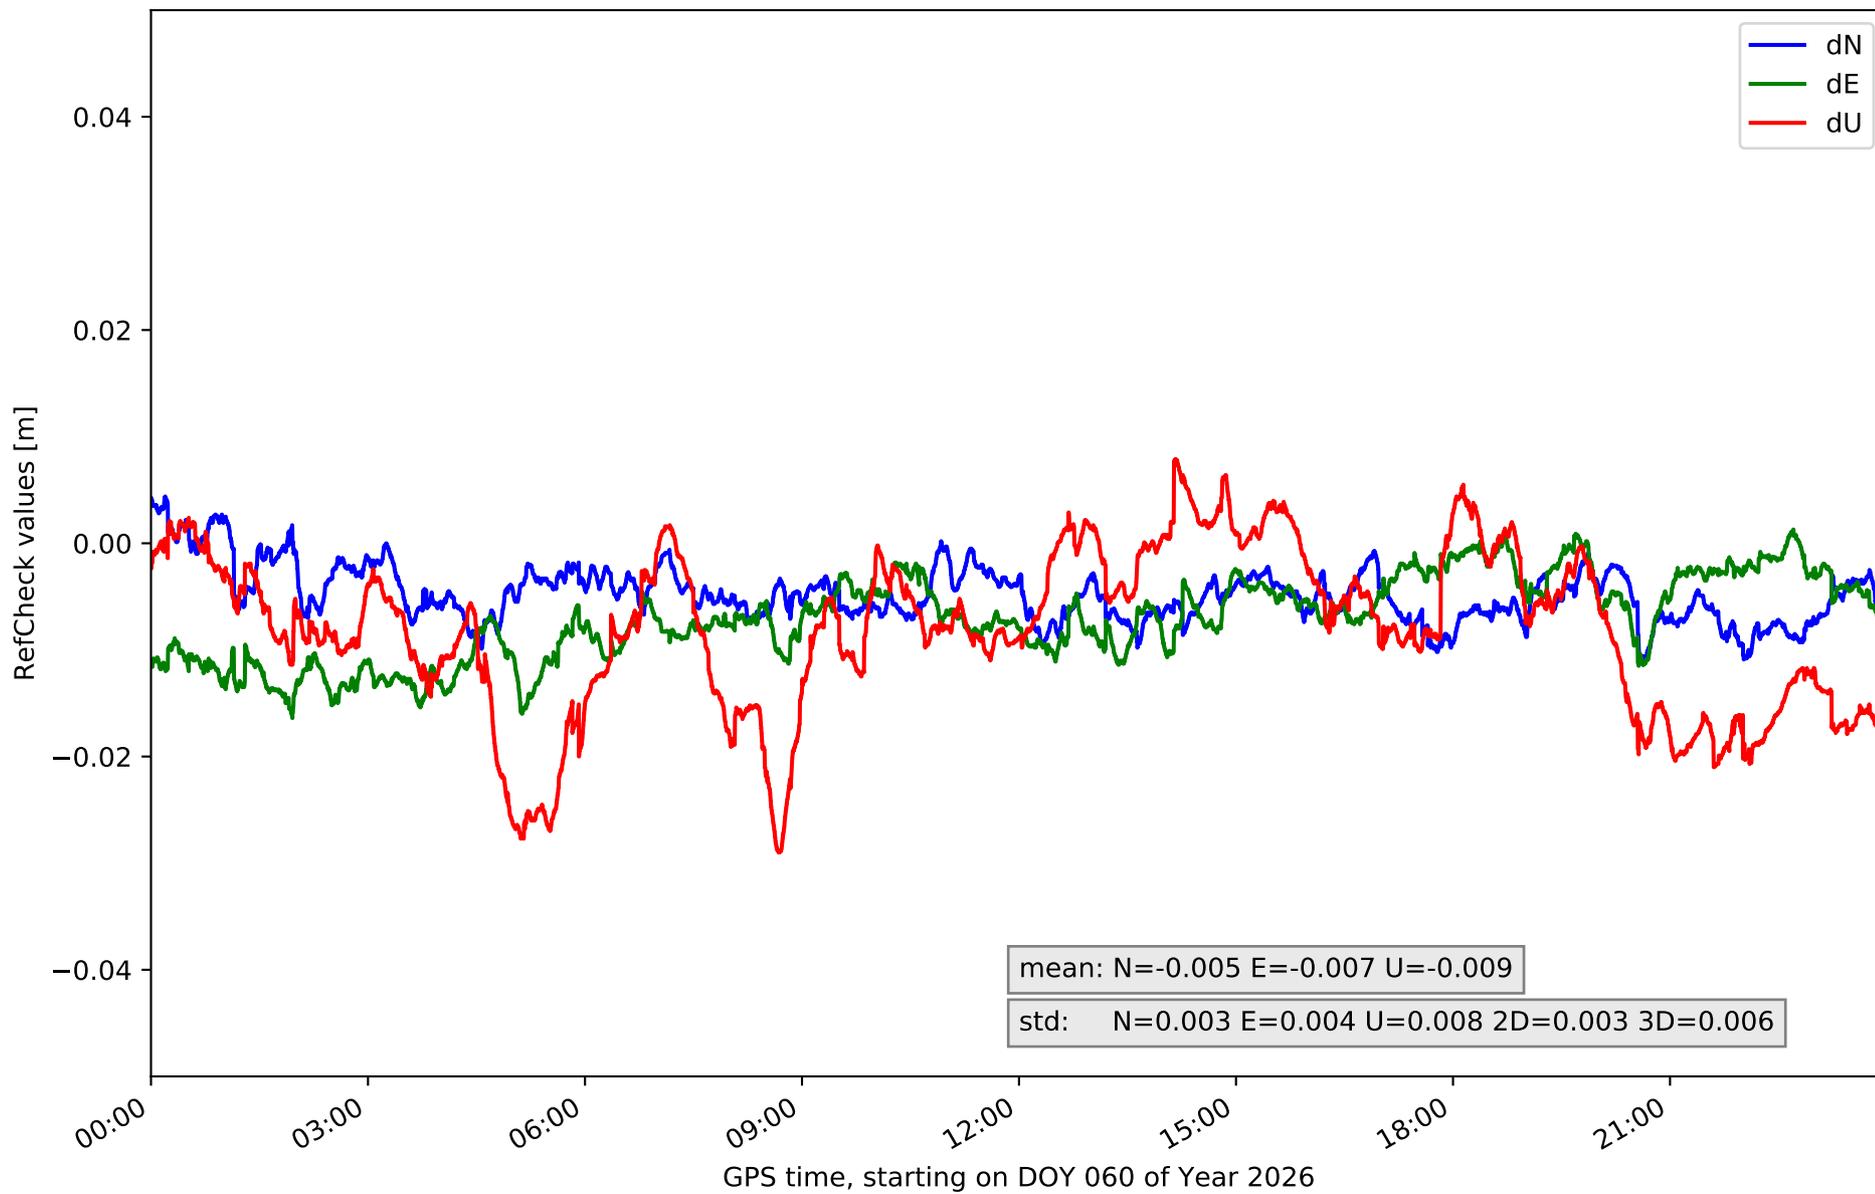

RefCheck for station TN09 in network N32T

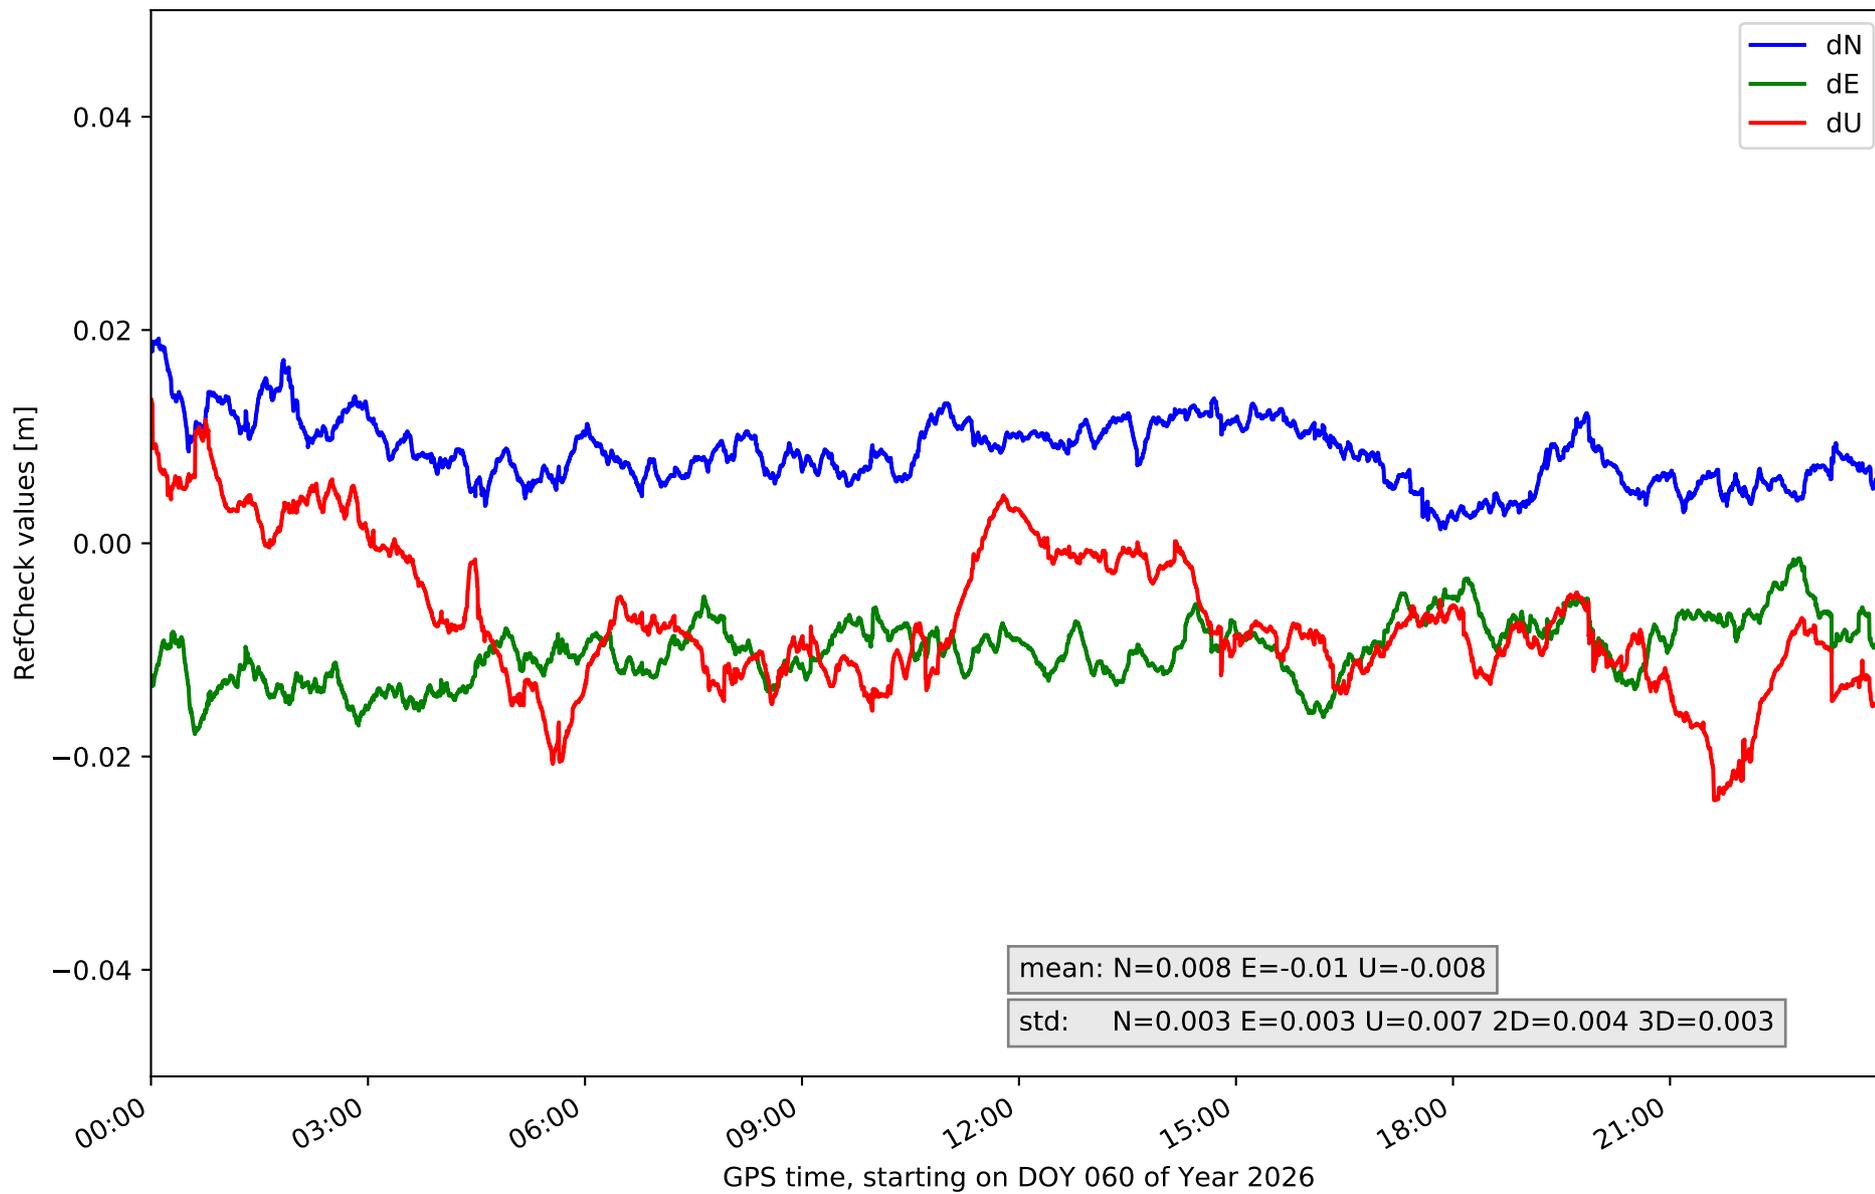

RefCheck for station TE11 in network N32T

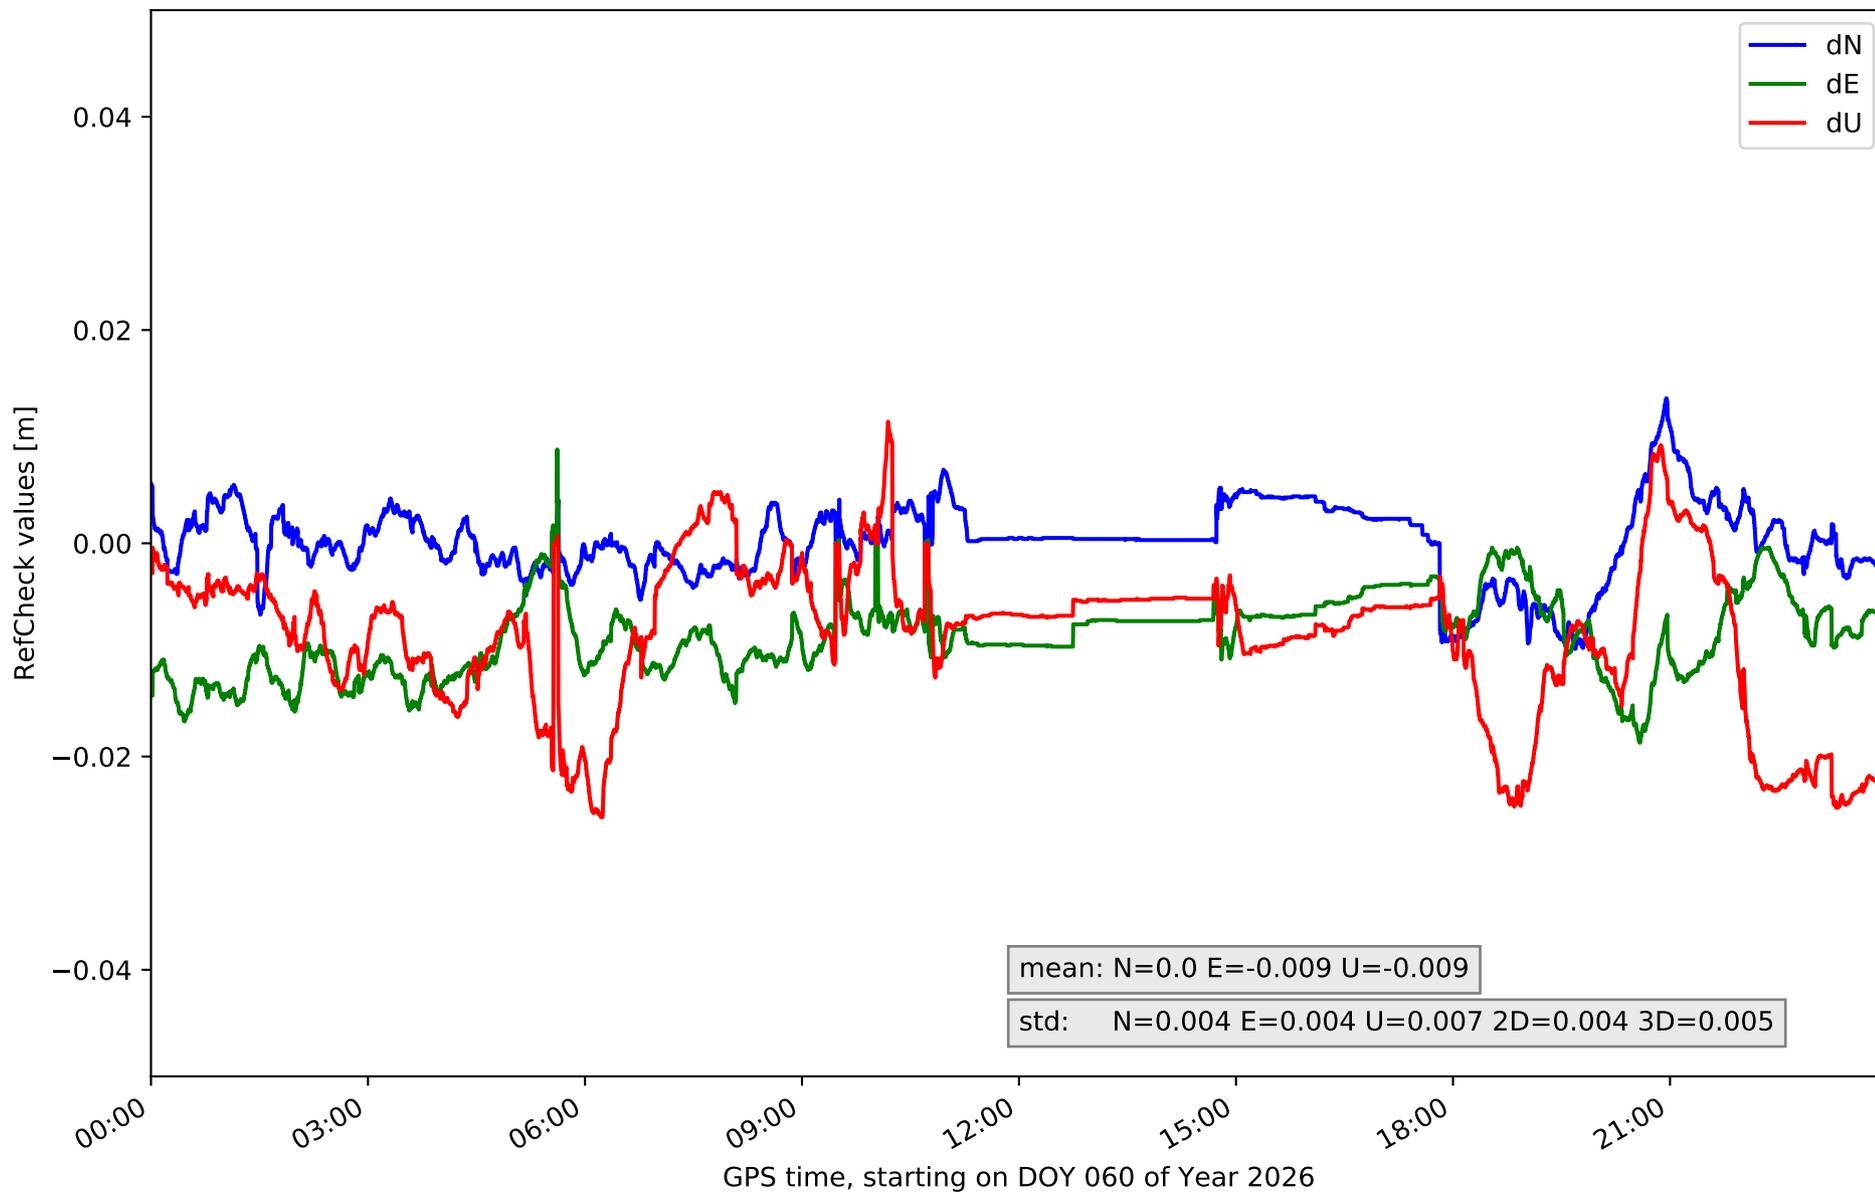

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.028	0.027	0.005	-0.013	0.025	0.005	-0.053	0.027	0.012	0.004	0.007	55278	94.5	15595	26.7
EH02	-0.014	0.026	0.006	-0.021	0.027	0.006	-0.047	0.06	0.022	0.006	0.011	51457	88.0	53466	91.4
GOM1	-0.028	0.022	0.008	-0.025	0.003	0.006	-0.038	0.017	0.011	0.006	0.008	41685	71.3	30239	51.7
GOME	-0.013	0.016	0.006	-0.017	0.009	0.005	-0.032	0.021	0.01	0.004	0.006	11629	19.9	7040	12.0
IZAN	-0.011	0.009	0.003	-0.018	0.002	0.003	-0.036	0.007	0.007	0.003	0.006	38694	66.2	16649	28.5
LP01	-0.025	0.001	0.004	-0.005	0.013	0.003	-0.014	0.033	0.008	0.003	0.004	55494	94.9	16878	28.9
LP03	-0.015	0.012	0.004	-0.012	0.03	0.004	-0.031	0.012	0.008	0.004	0.006	13755	23.5	7603	13.0
LPAL	-0.019	-0.0	0.003	-0.004	0.018	0.004	-0.028	0.011	0.008	0.004	0.006	51775	88.6	19210	32.9
LRES	-0.006	0.03	0.004	-0.021	0.028	0.007	-0.06	0.053	0.015	0.005	0.008	52633	90.0	39878	68.2
TN01	-0.029	0.043	0.008	-0.029	0.028	0.008	-0.041	0.061	0.02	0.006	0.012	47527	81.3	27389	46.8
TN02	-0.015	0.007	0.004	-0.019	0.003	0.005	-0.021	0.022	0.009	0.004	0.006	33828	57.9	10176	17.4
TN03	-0.01	0.015	0.004	-0.012	0.004	0.003	-0.036	0.007	0.009	0.003	0.007	2892	4.9	16483	28.2
TN06	-0.011	0.004	0.003	-0.016	0.001	0.004	-0.029	0.008	0.008	0.003	0.006	20819	35.6	8714	14.9
TN09	0.001	0.019	0.003	-0.018	-0.001	0.003	-0.024	0.013	0.007	0.004	0.003	46907	80.2	8598	14.7
TE11	-0.01	0.014	0.004	-0.019	0.009	0.004	-0.026	0.011	0.007	0.004	0.005	25913	44.3	8884	15.2
Mean	-0.016	0.016	0.005	-0.017	0.013	0.005	-0.034	0.024	0.011	0.004	0.007	36685.7	62.7	19120.1	32.7
Min/Max	-0.029	0.043	0.008	-0.029	0.03	0.008	-0.06	0.061	0.022	0.006	0.012	55494	94.9	53466	91.4

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	88.6	89.0	89.2	89.2	88.1
considering satellites with dual-frequency fixed	83.5	86.1	84.2	79.5	84.5
considering all signals separately	82.9	86.3	84.2	79.5	81.9