

summary for network N32T

timeperiod chosen: from 2026-07-06-00:00:00 until 2026-07-06-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.2 seconds


average fixing percentage with threshold set to 0.3: 95.4 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

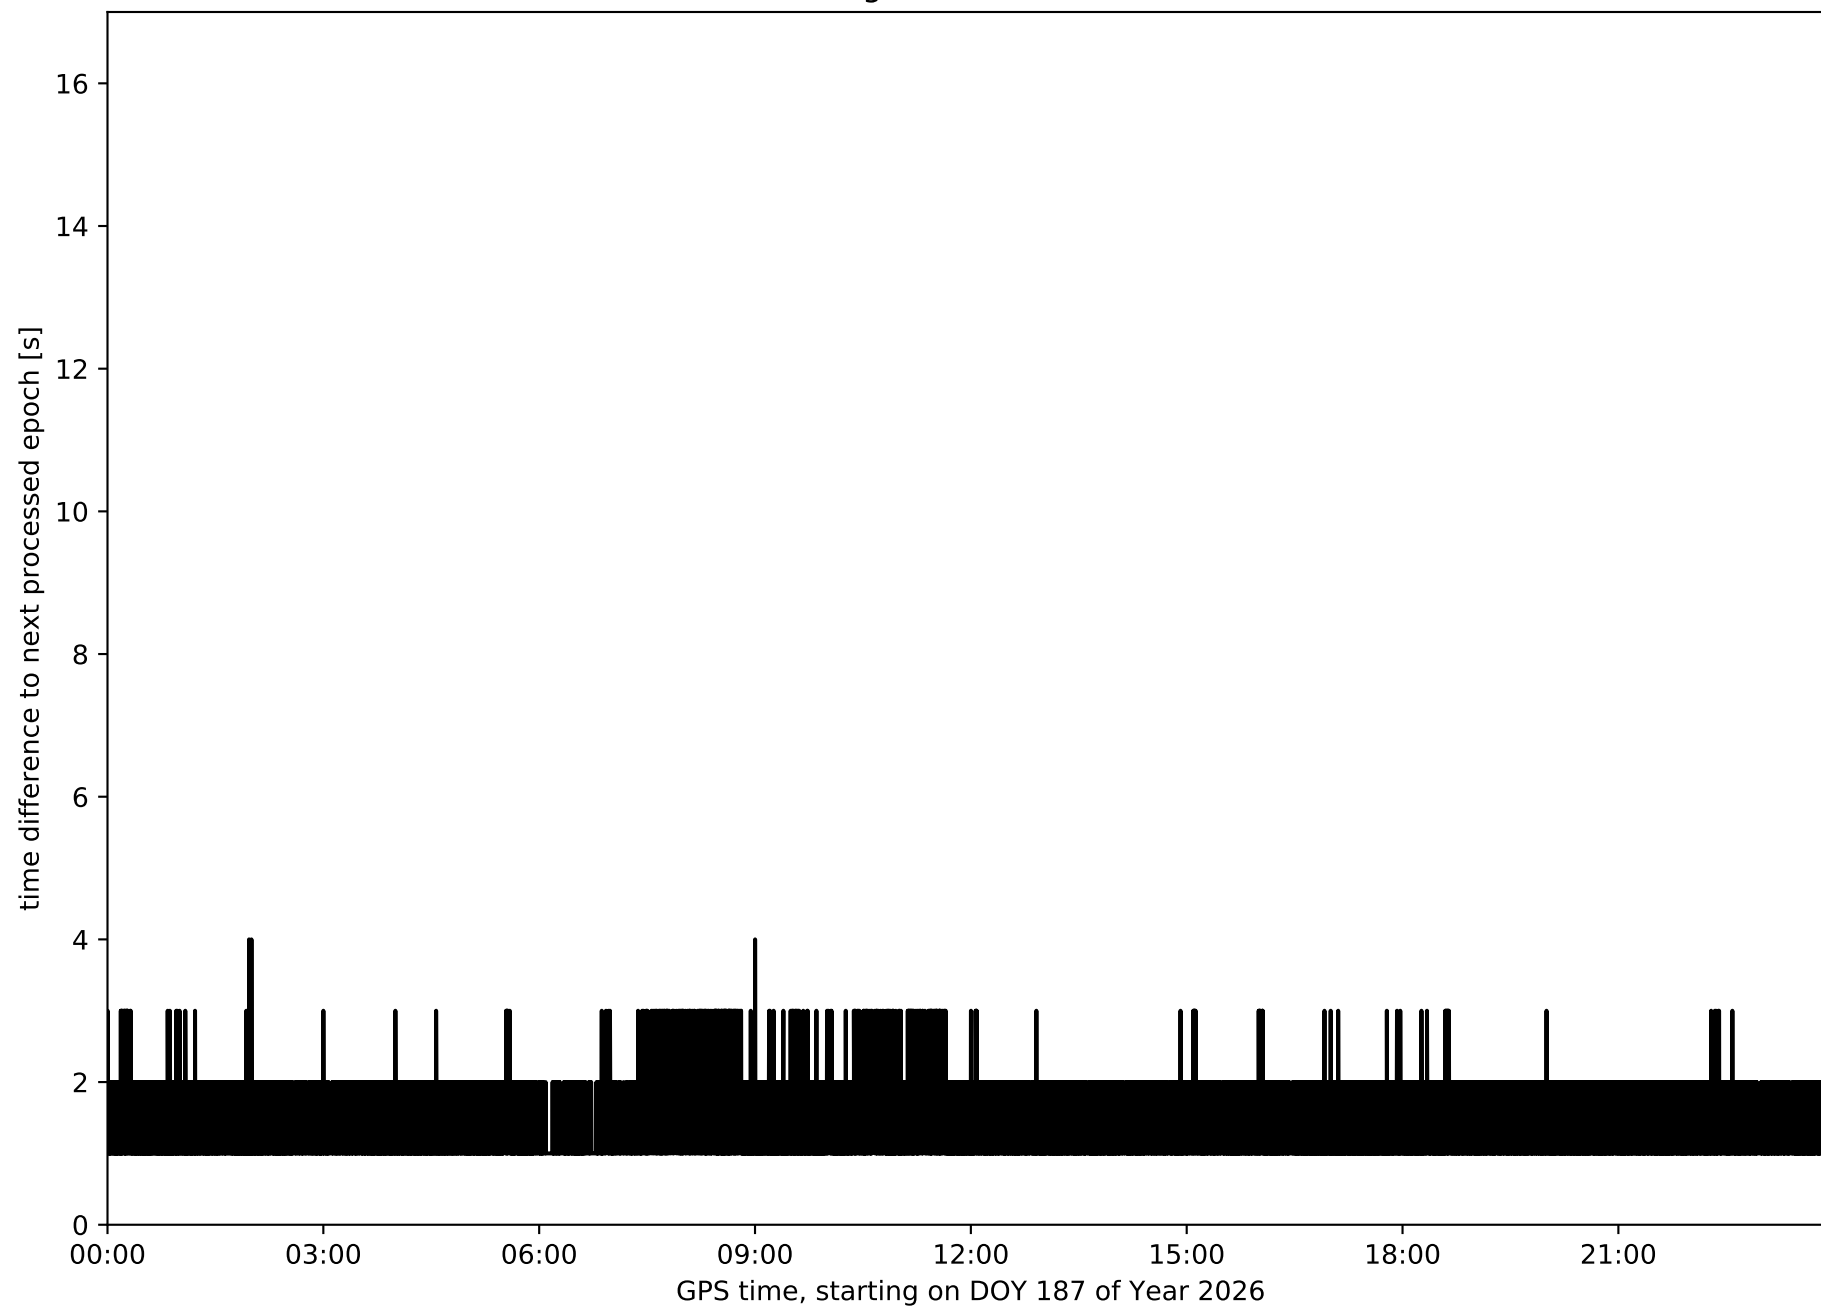


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

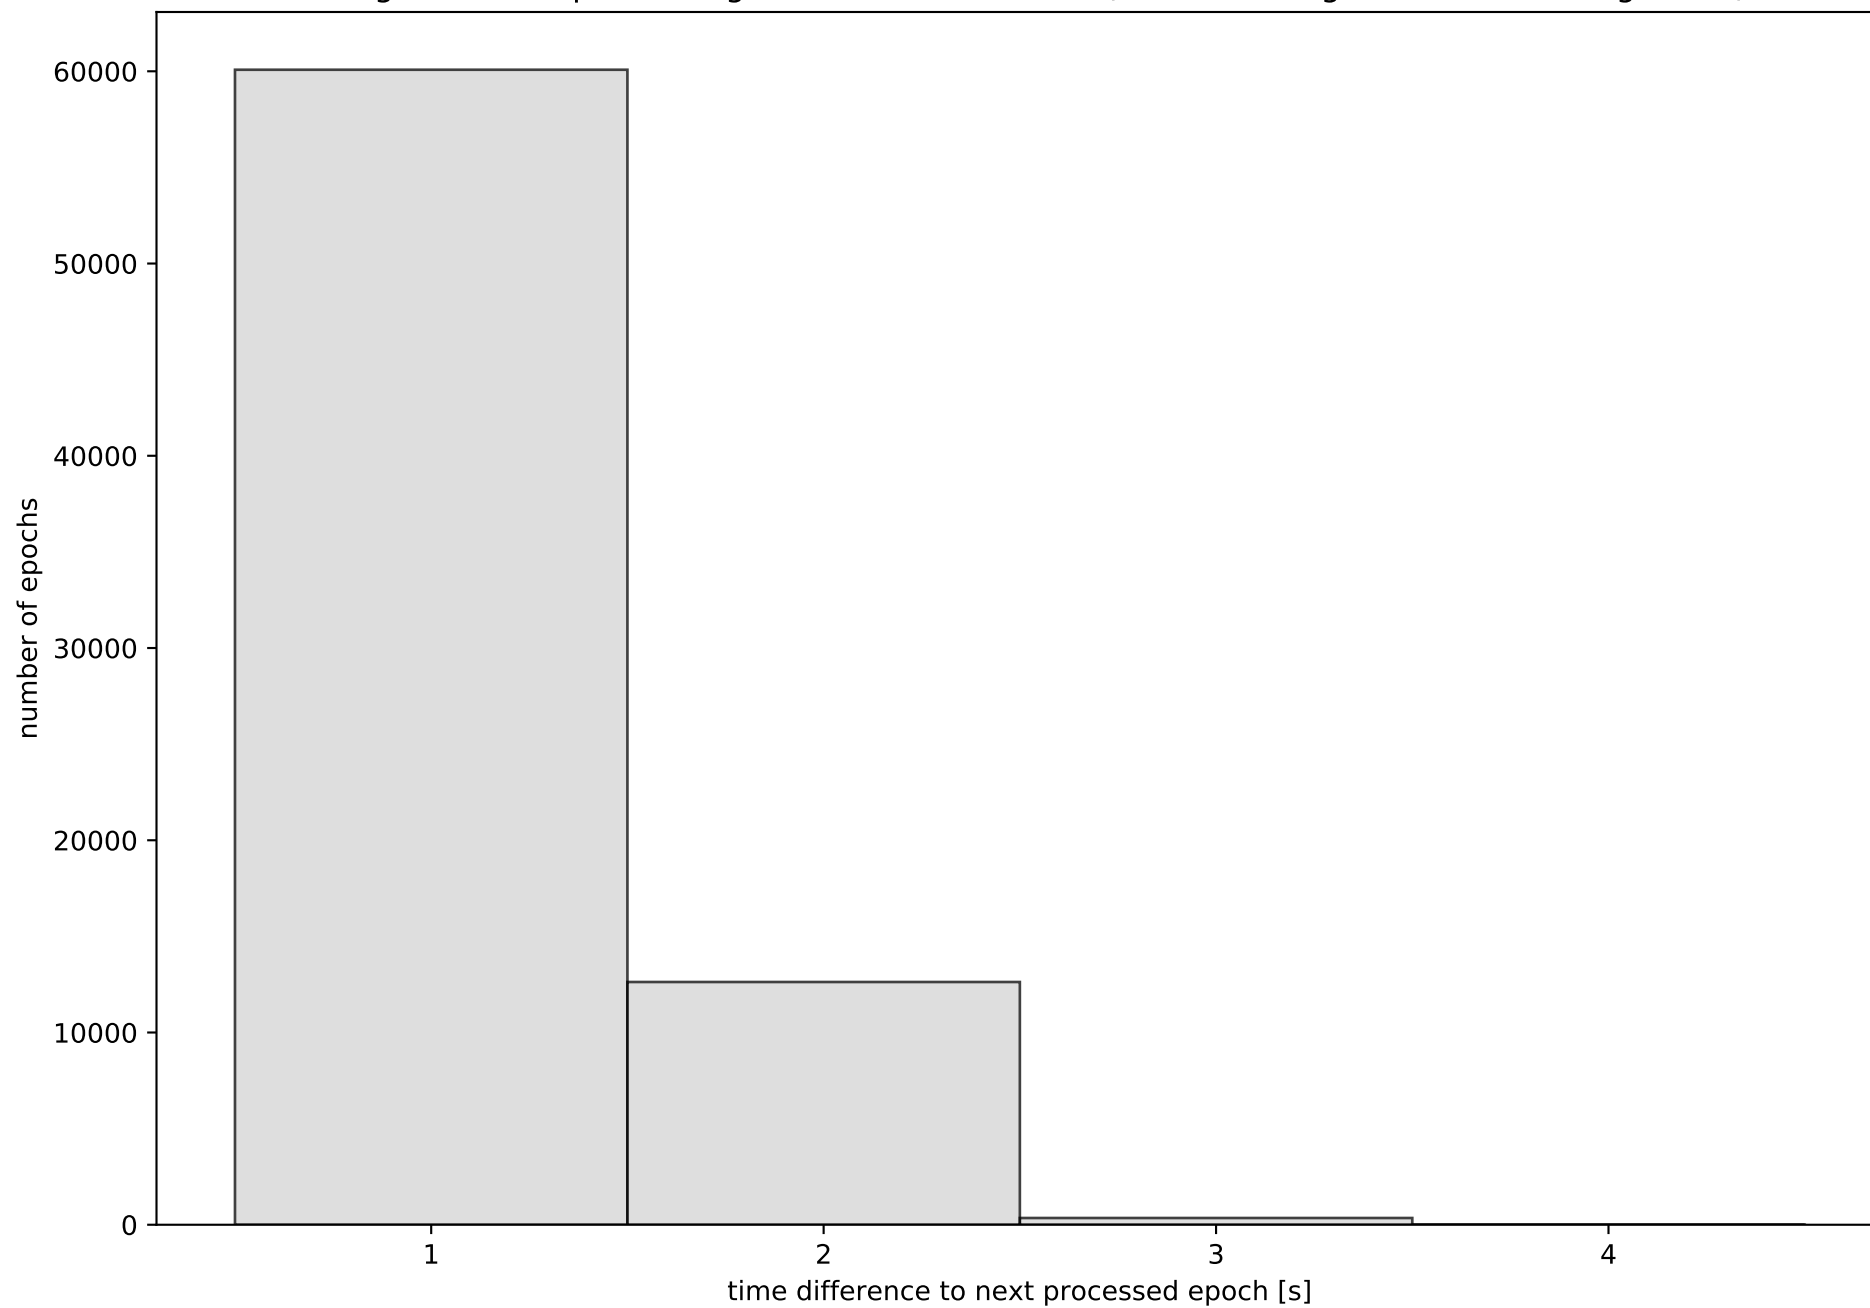


Network N32T with threshold set to 0.3

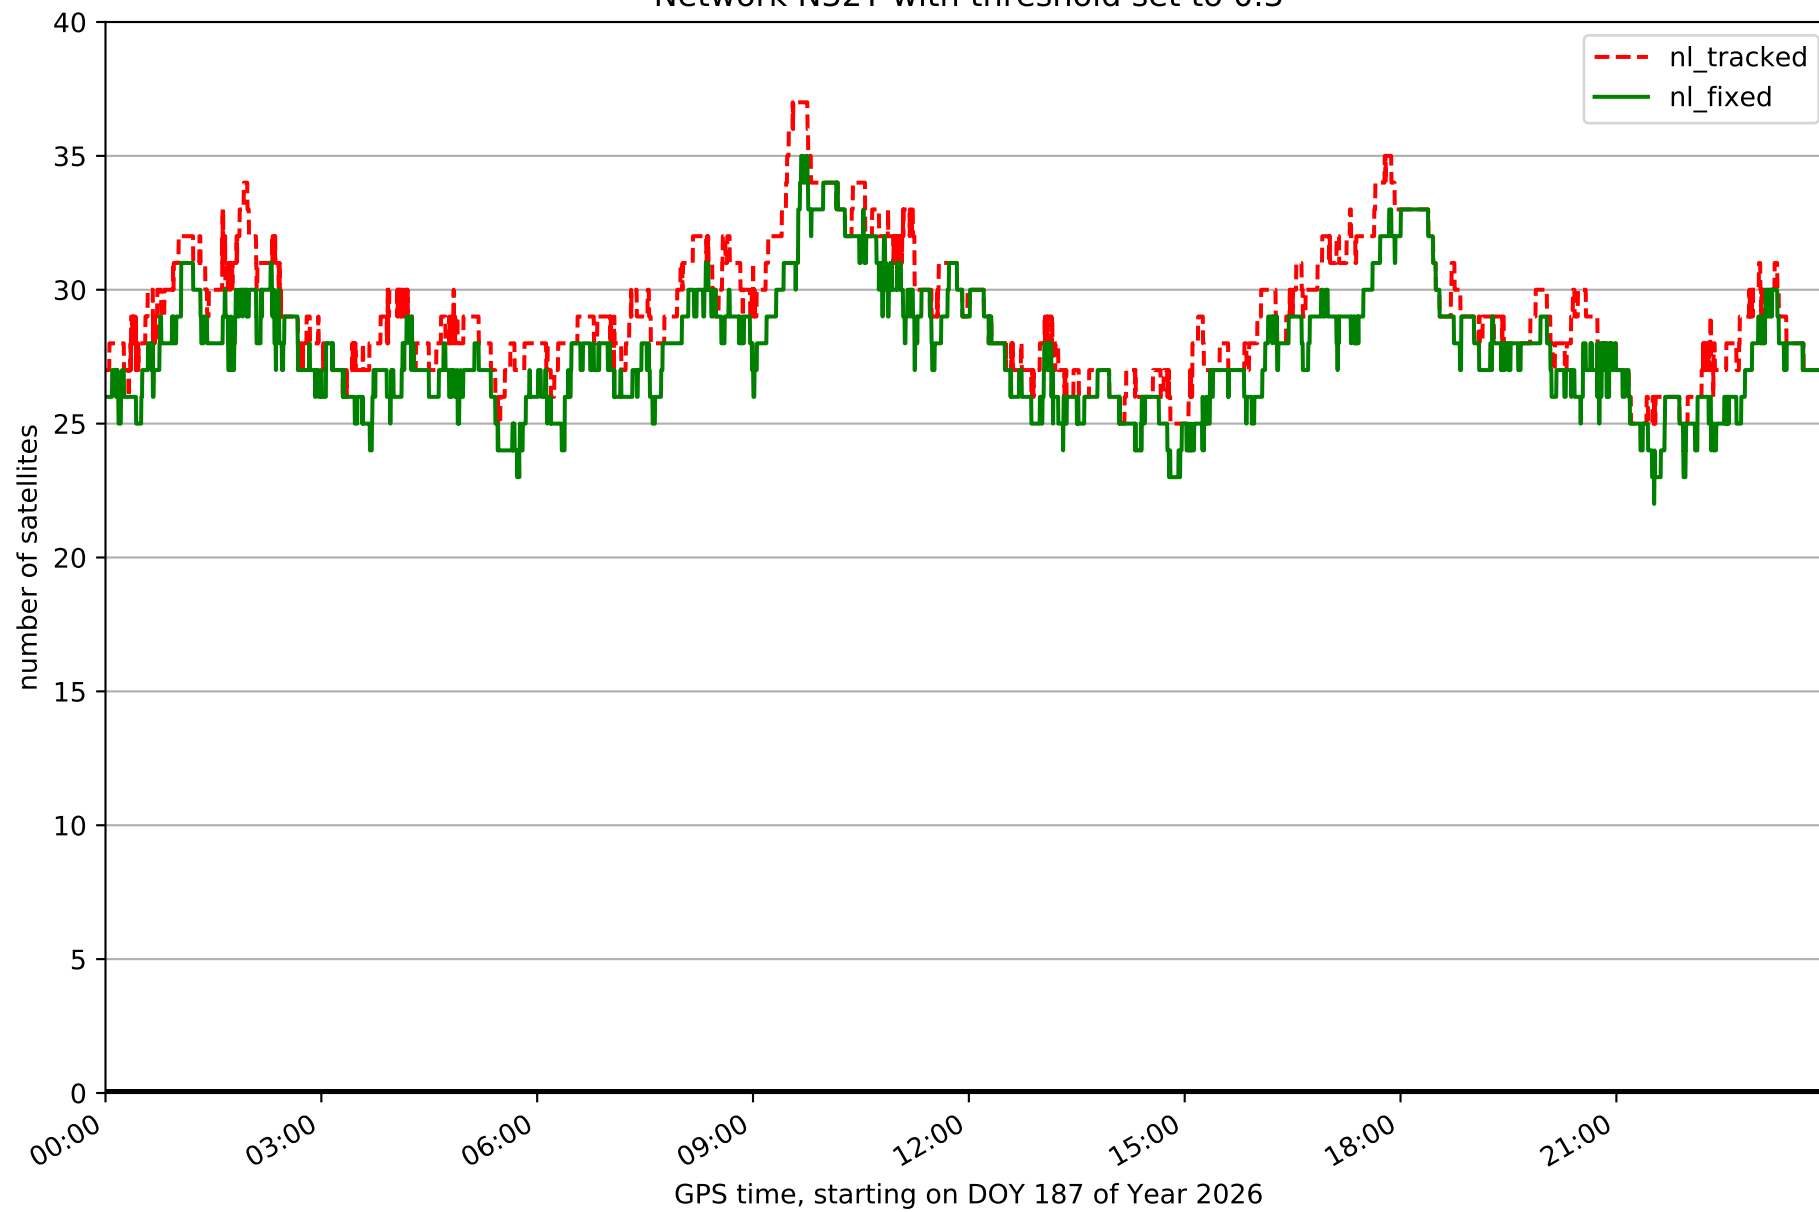


Fixing percentage of satellites in network N32T with threshold set to 0.3

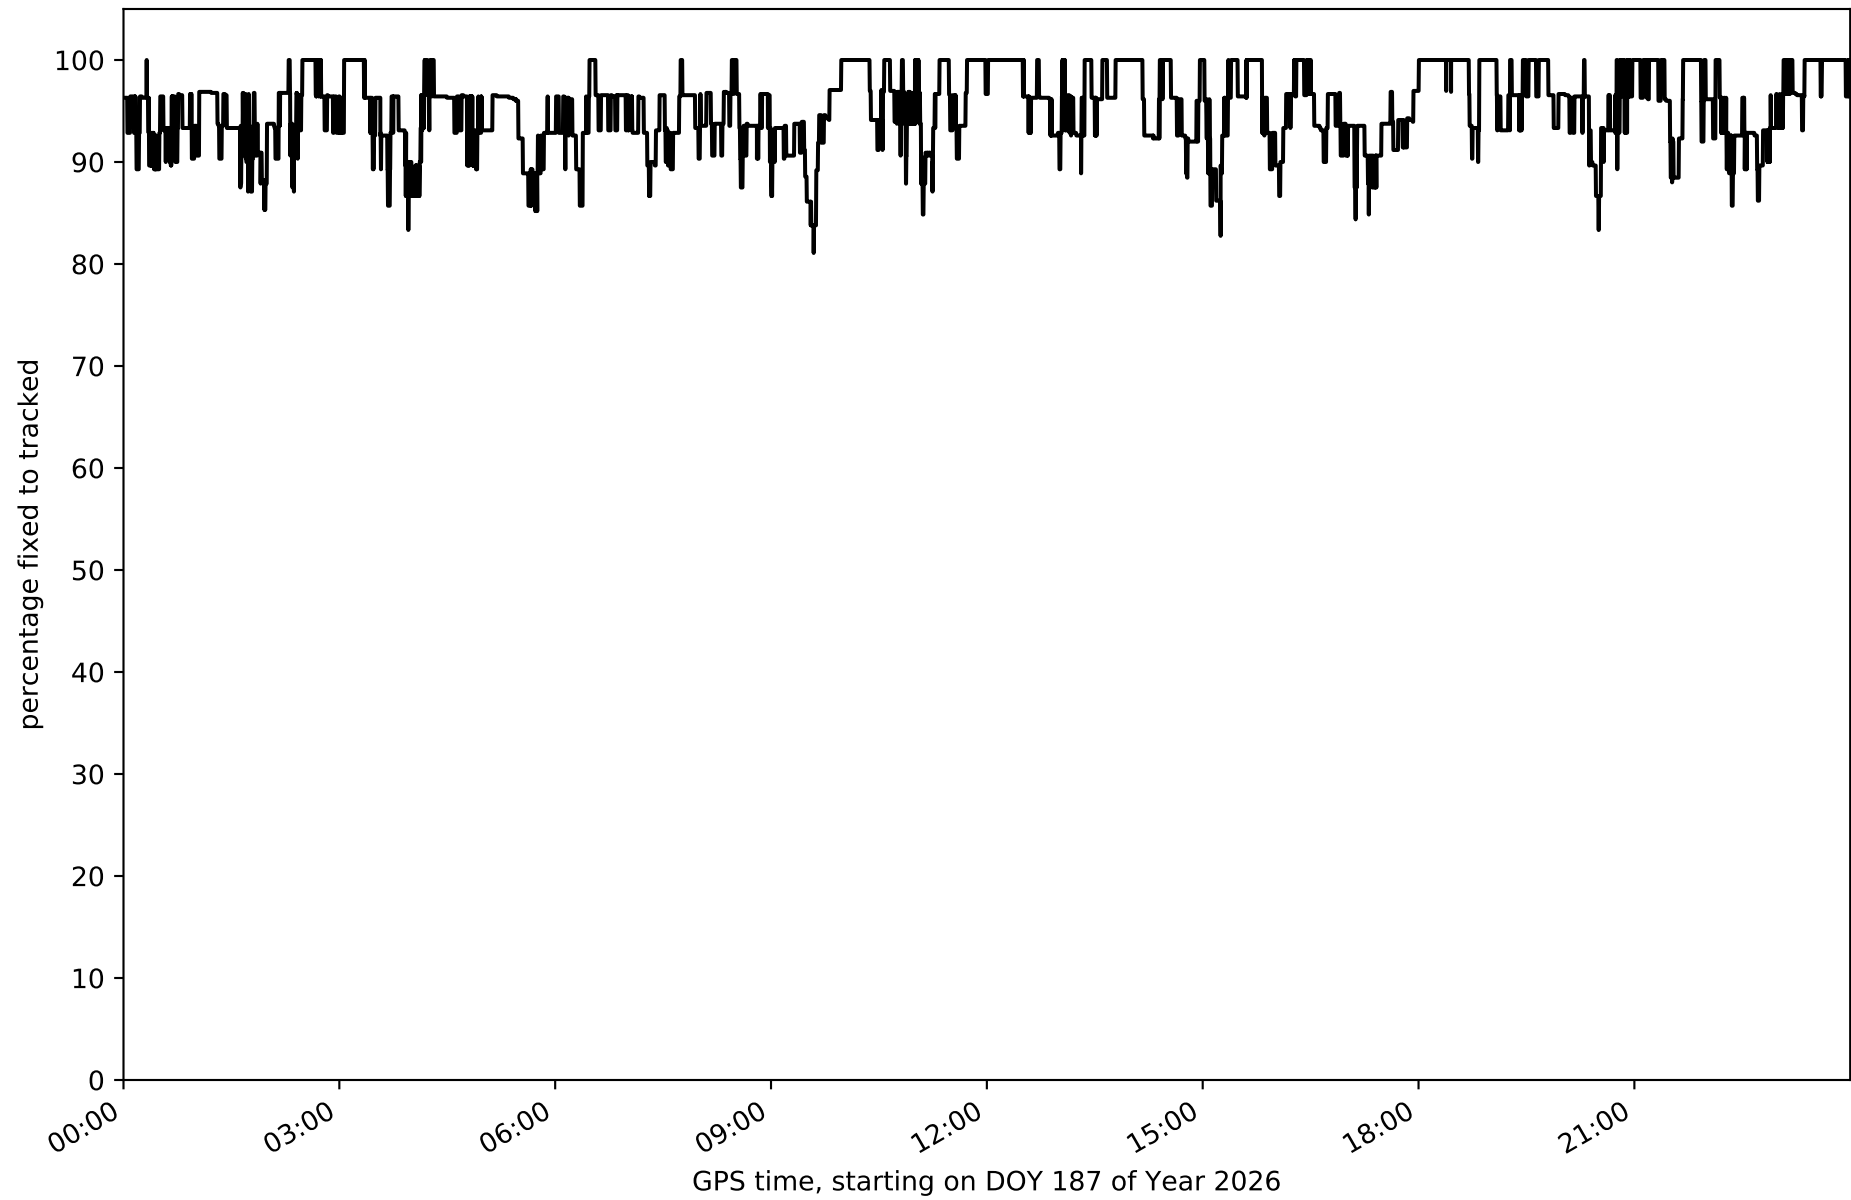


Network N32T - only GPS with threshold set to 0.3

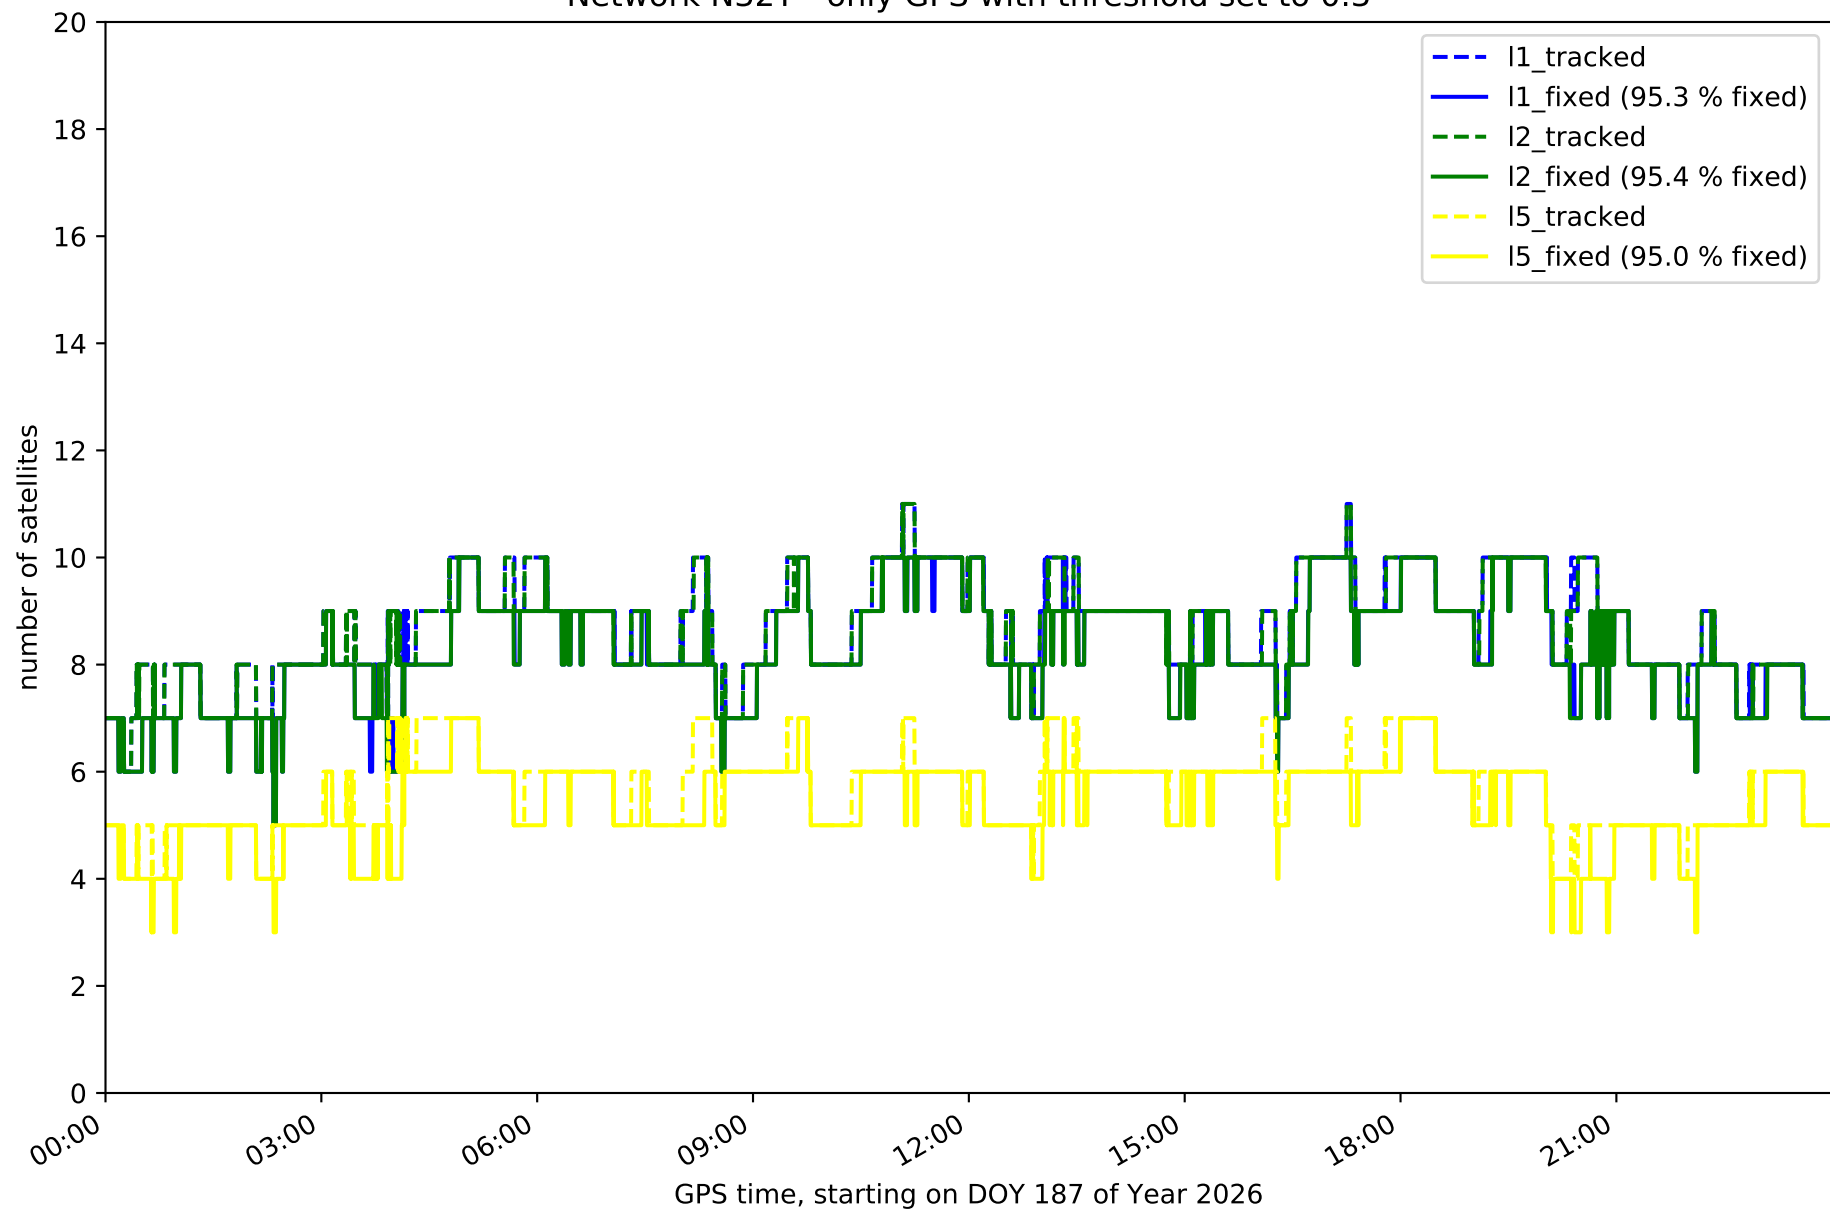


Network N32T - only GLONASS with threshold set to 0.3

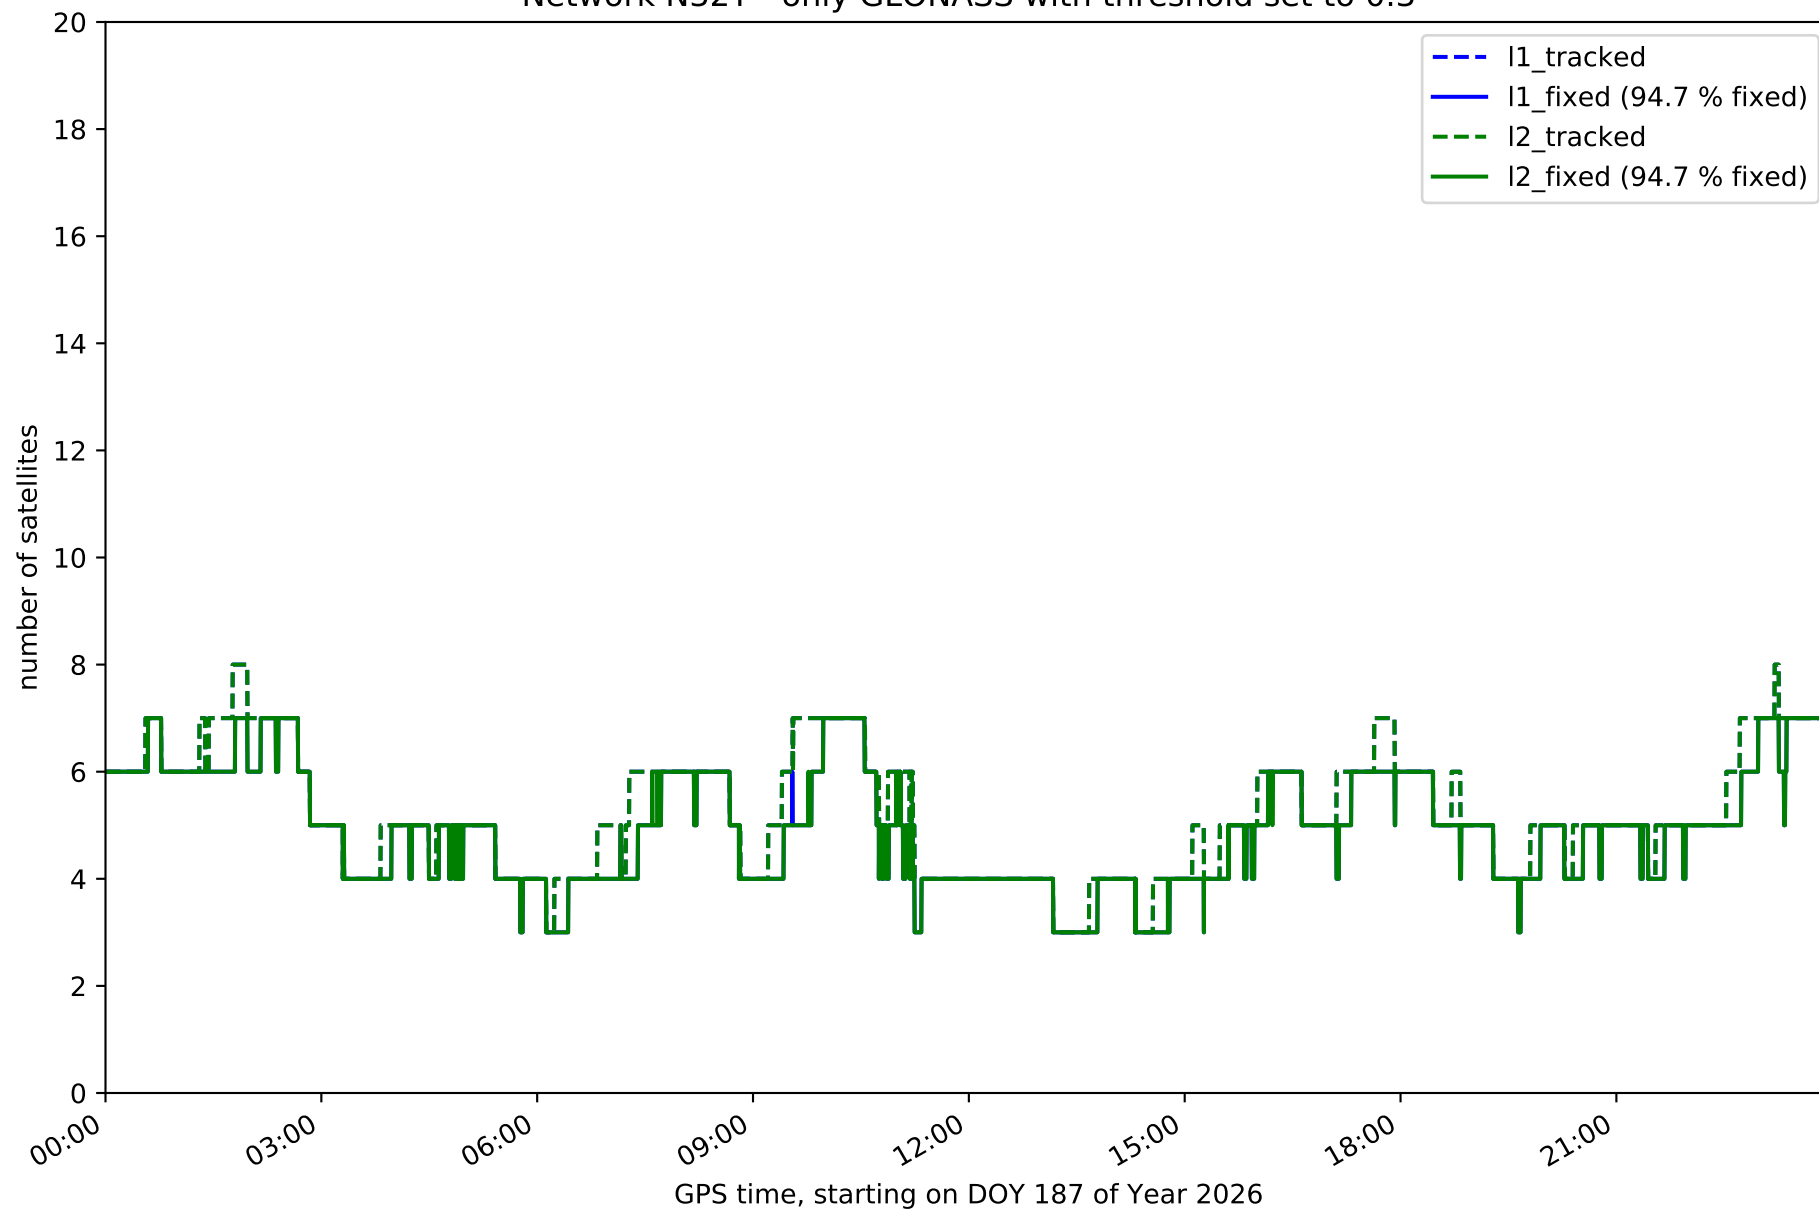


Network N32T - only BDS with threshold set to 0.3

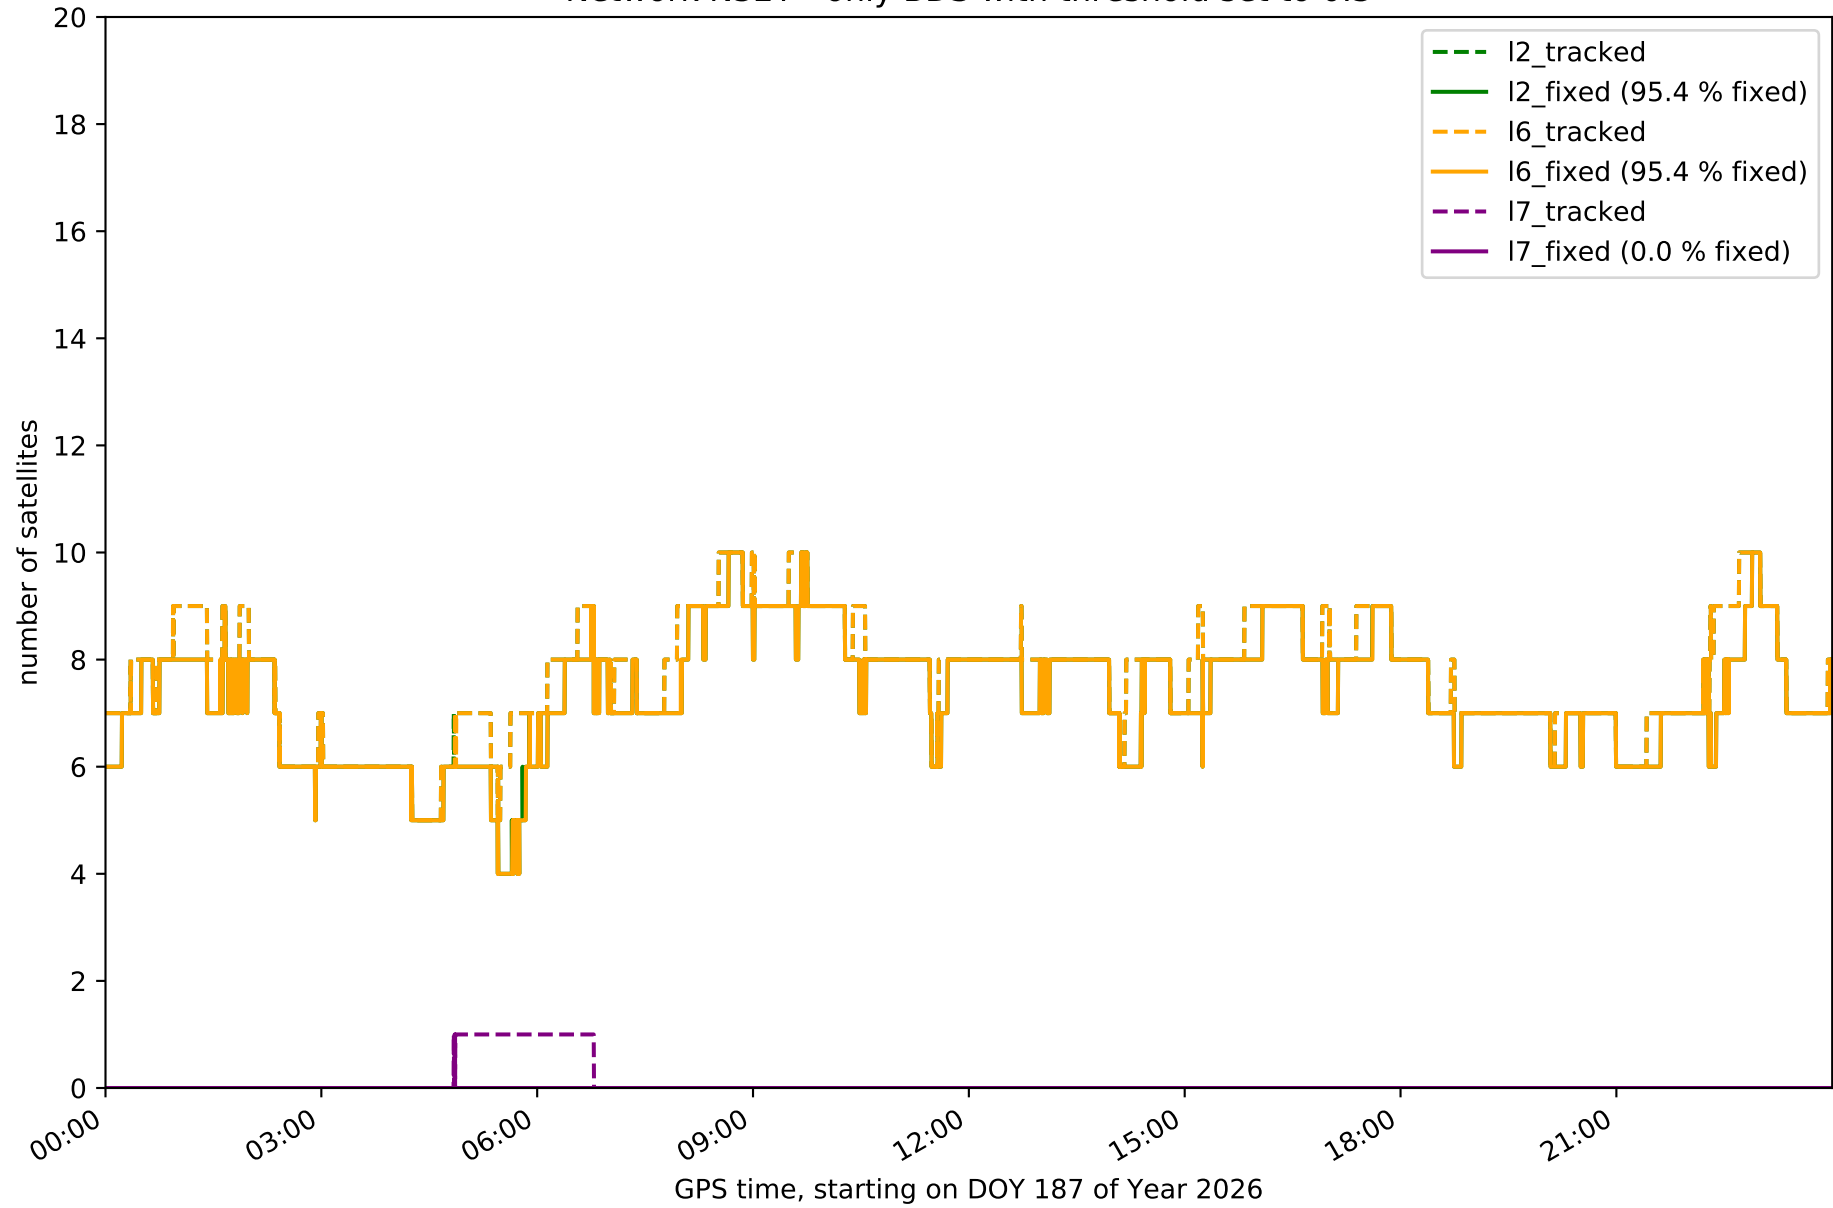


Network N32T - only Galileo with threshold set to 0.3

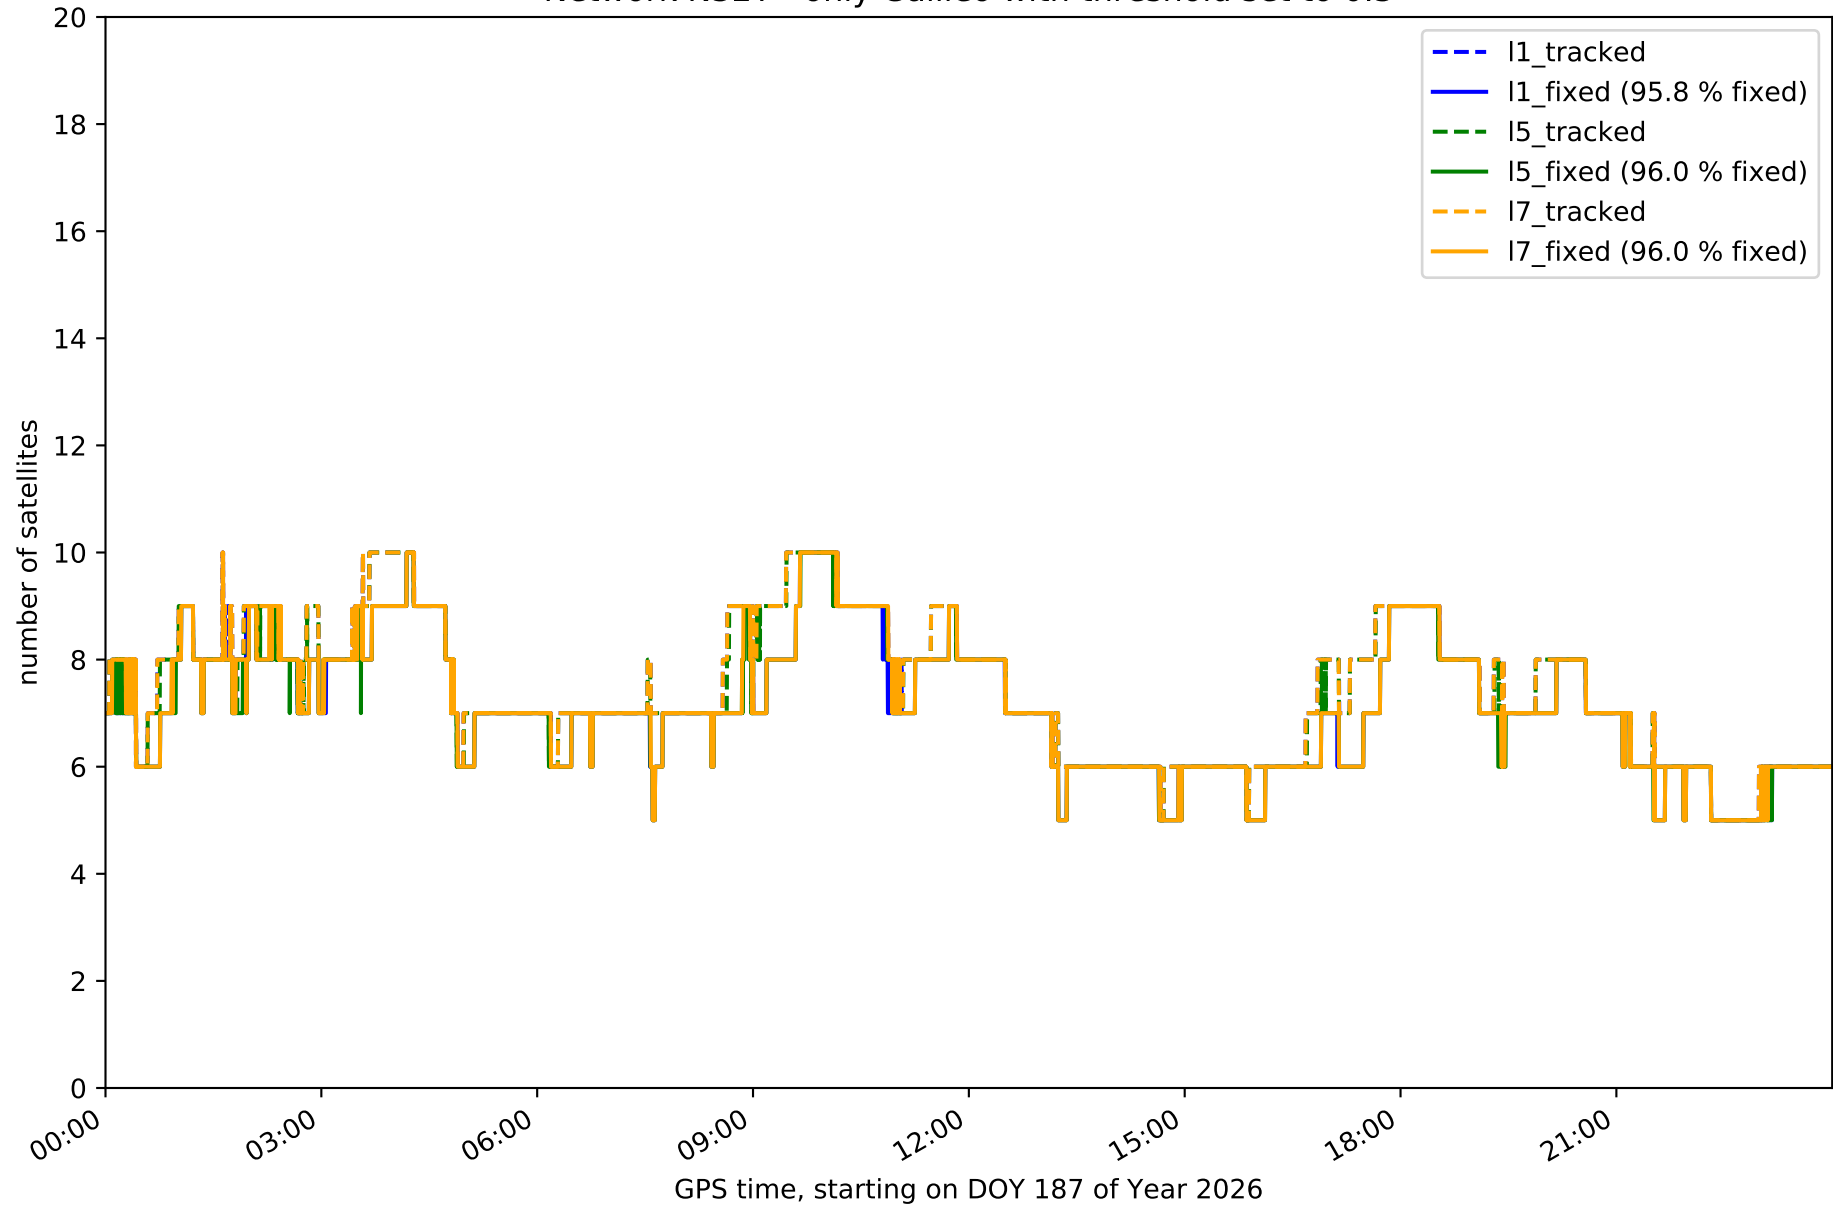


Station EH01 in network N32T

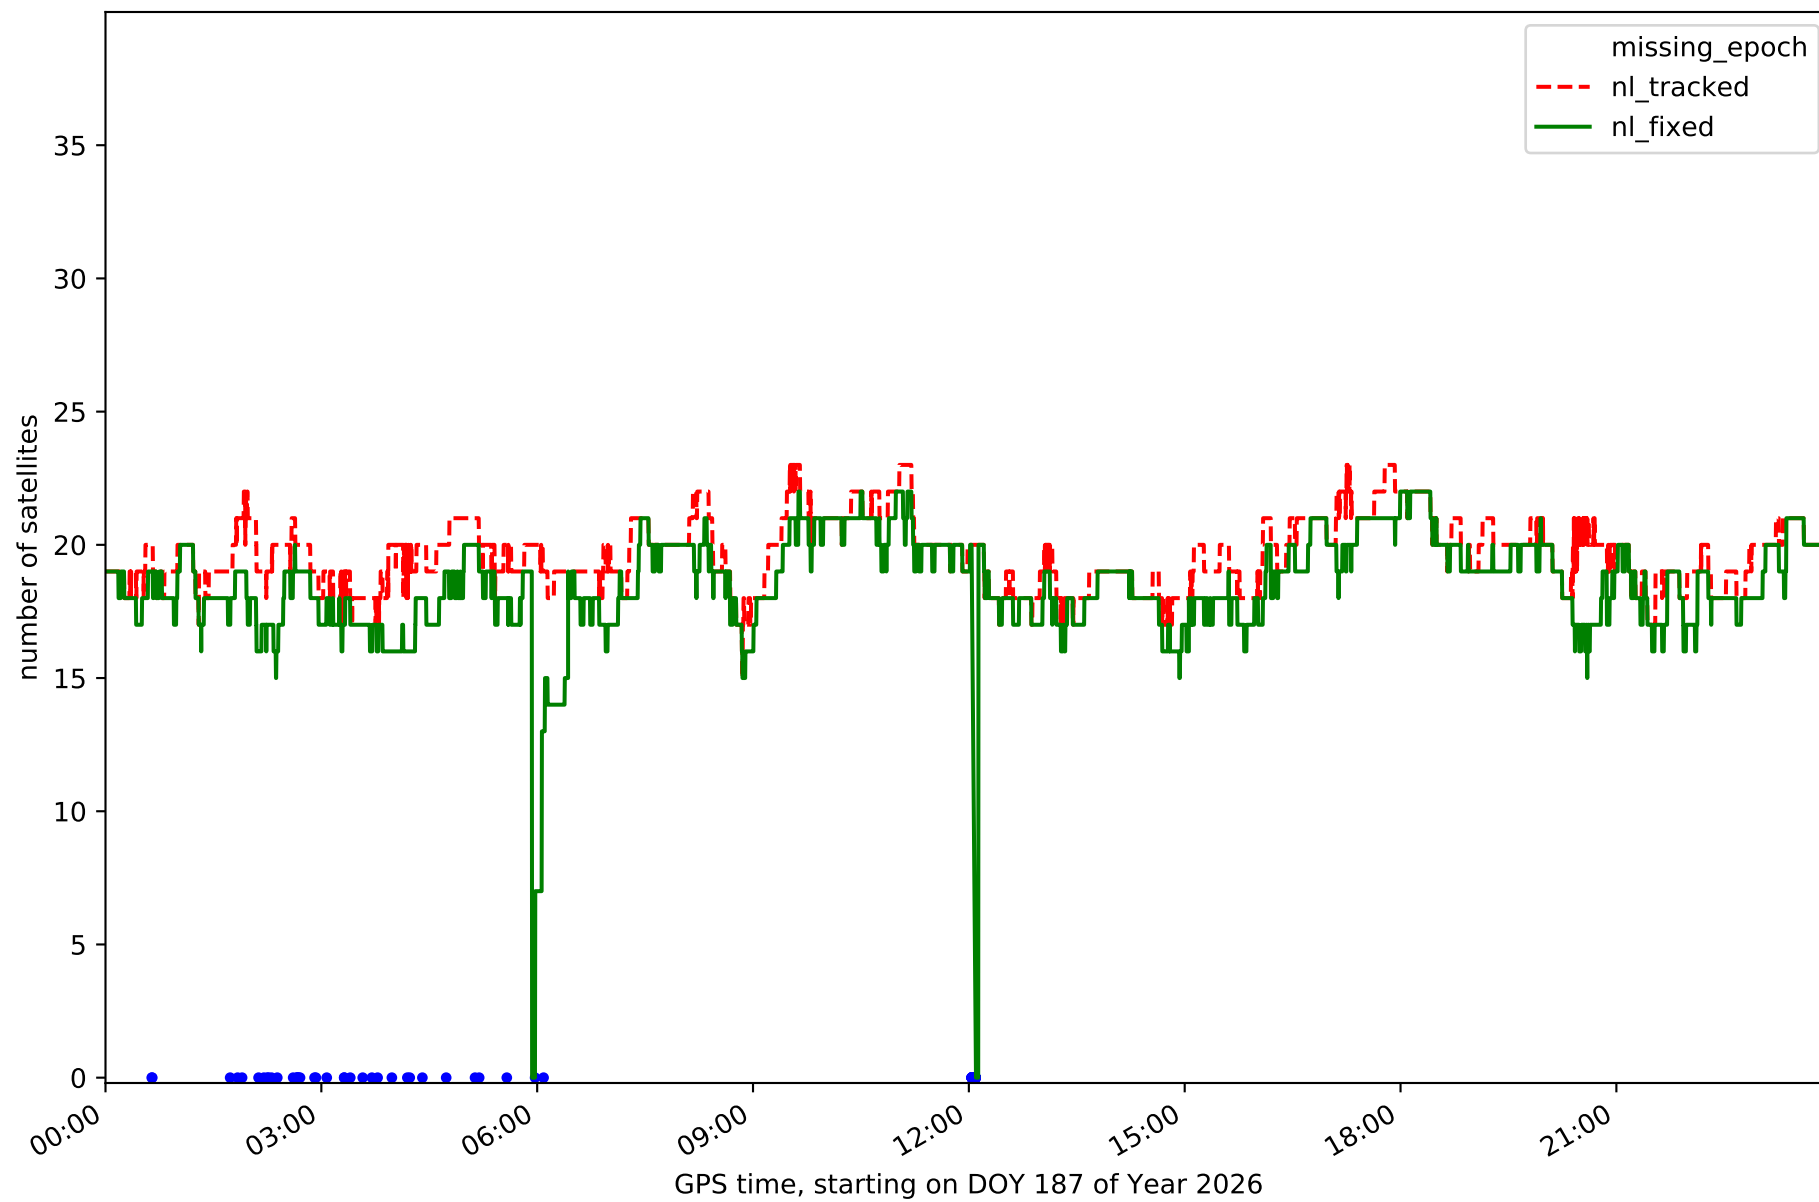


Station EH02 in network N32T

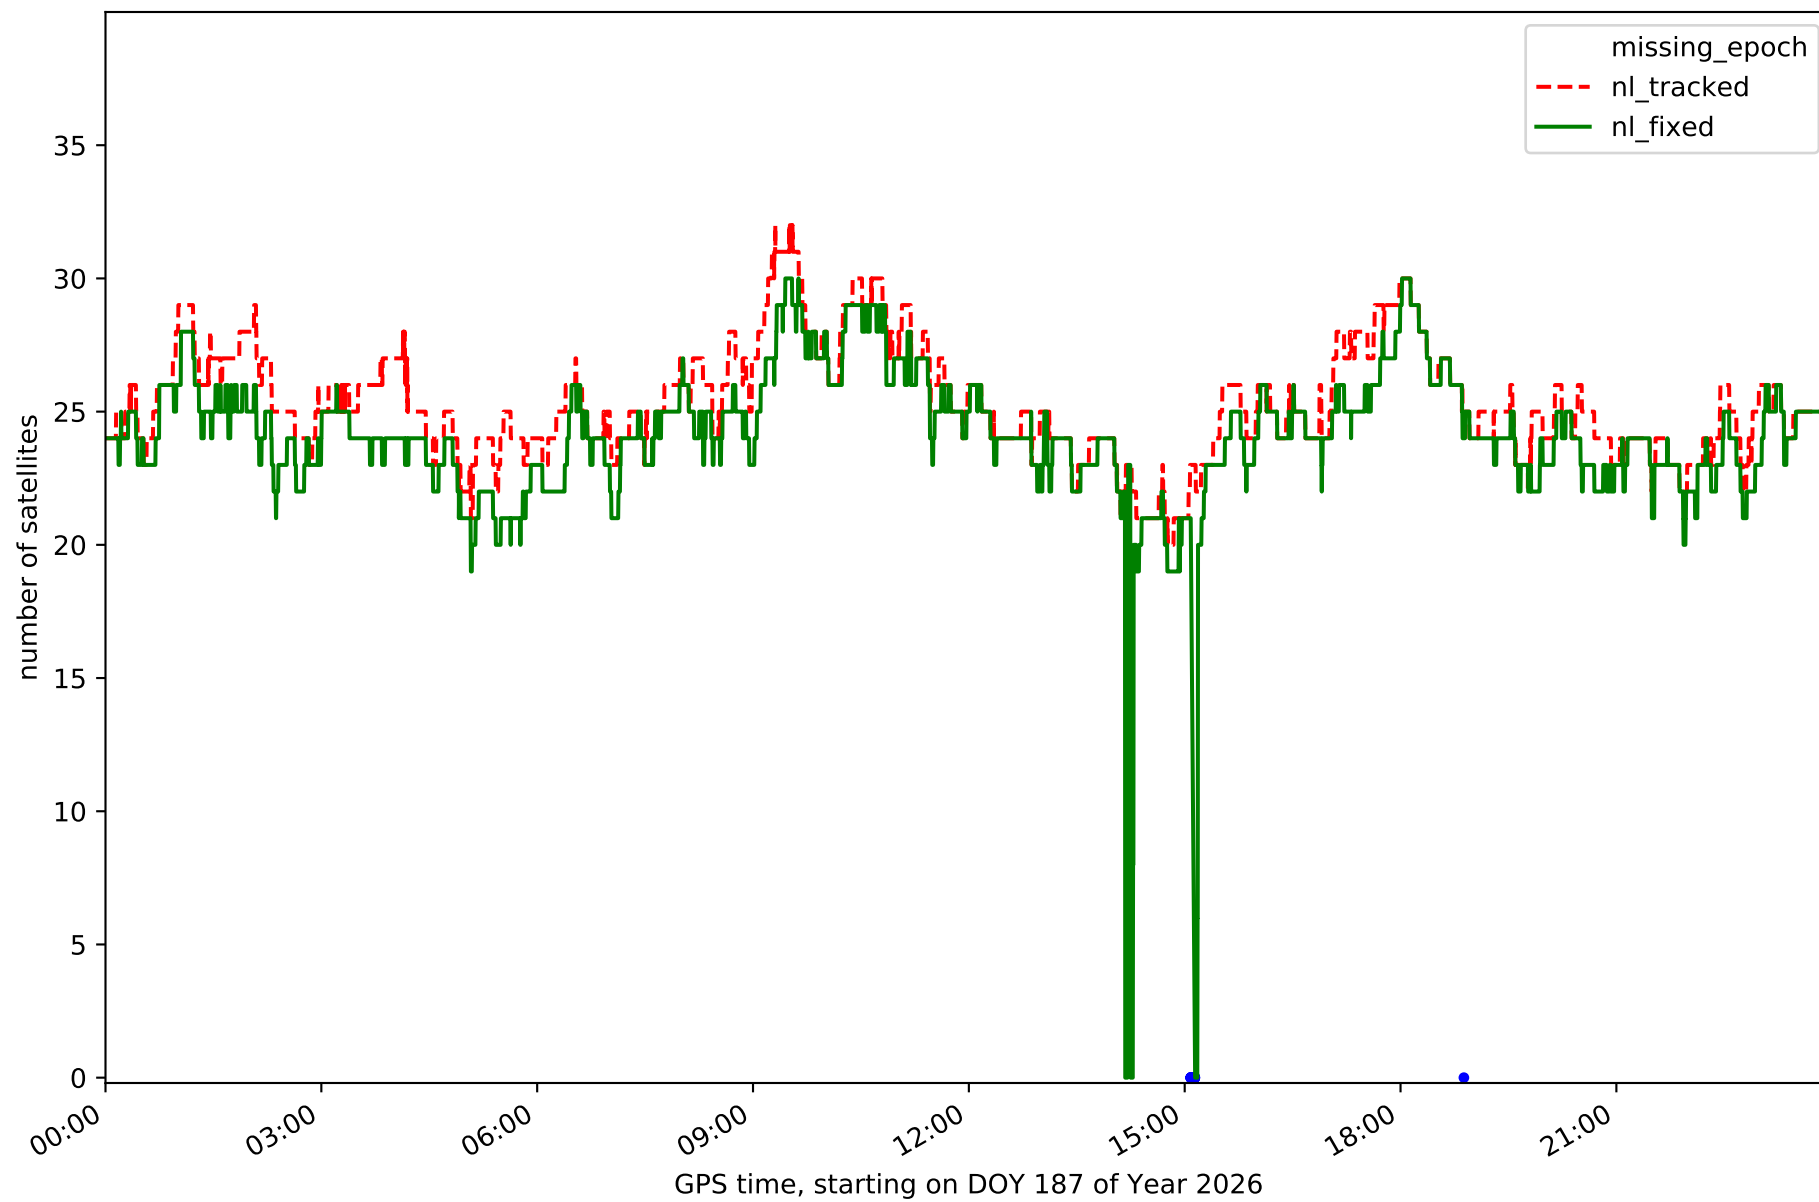


Station GOM1 in network N32T

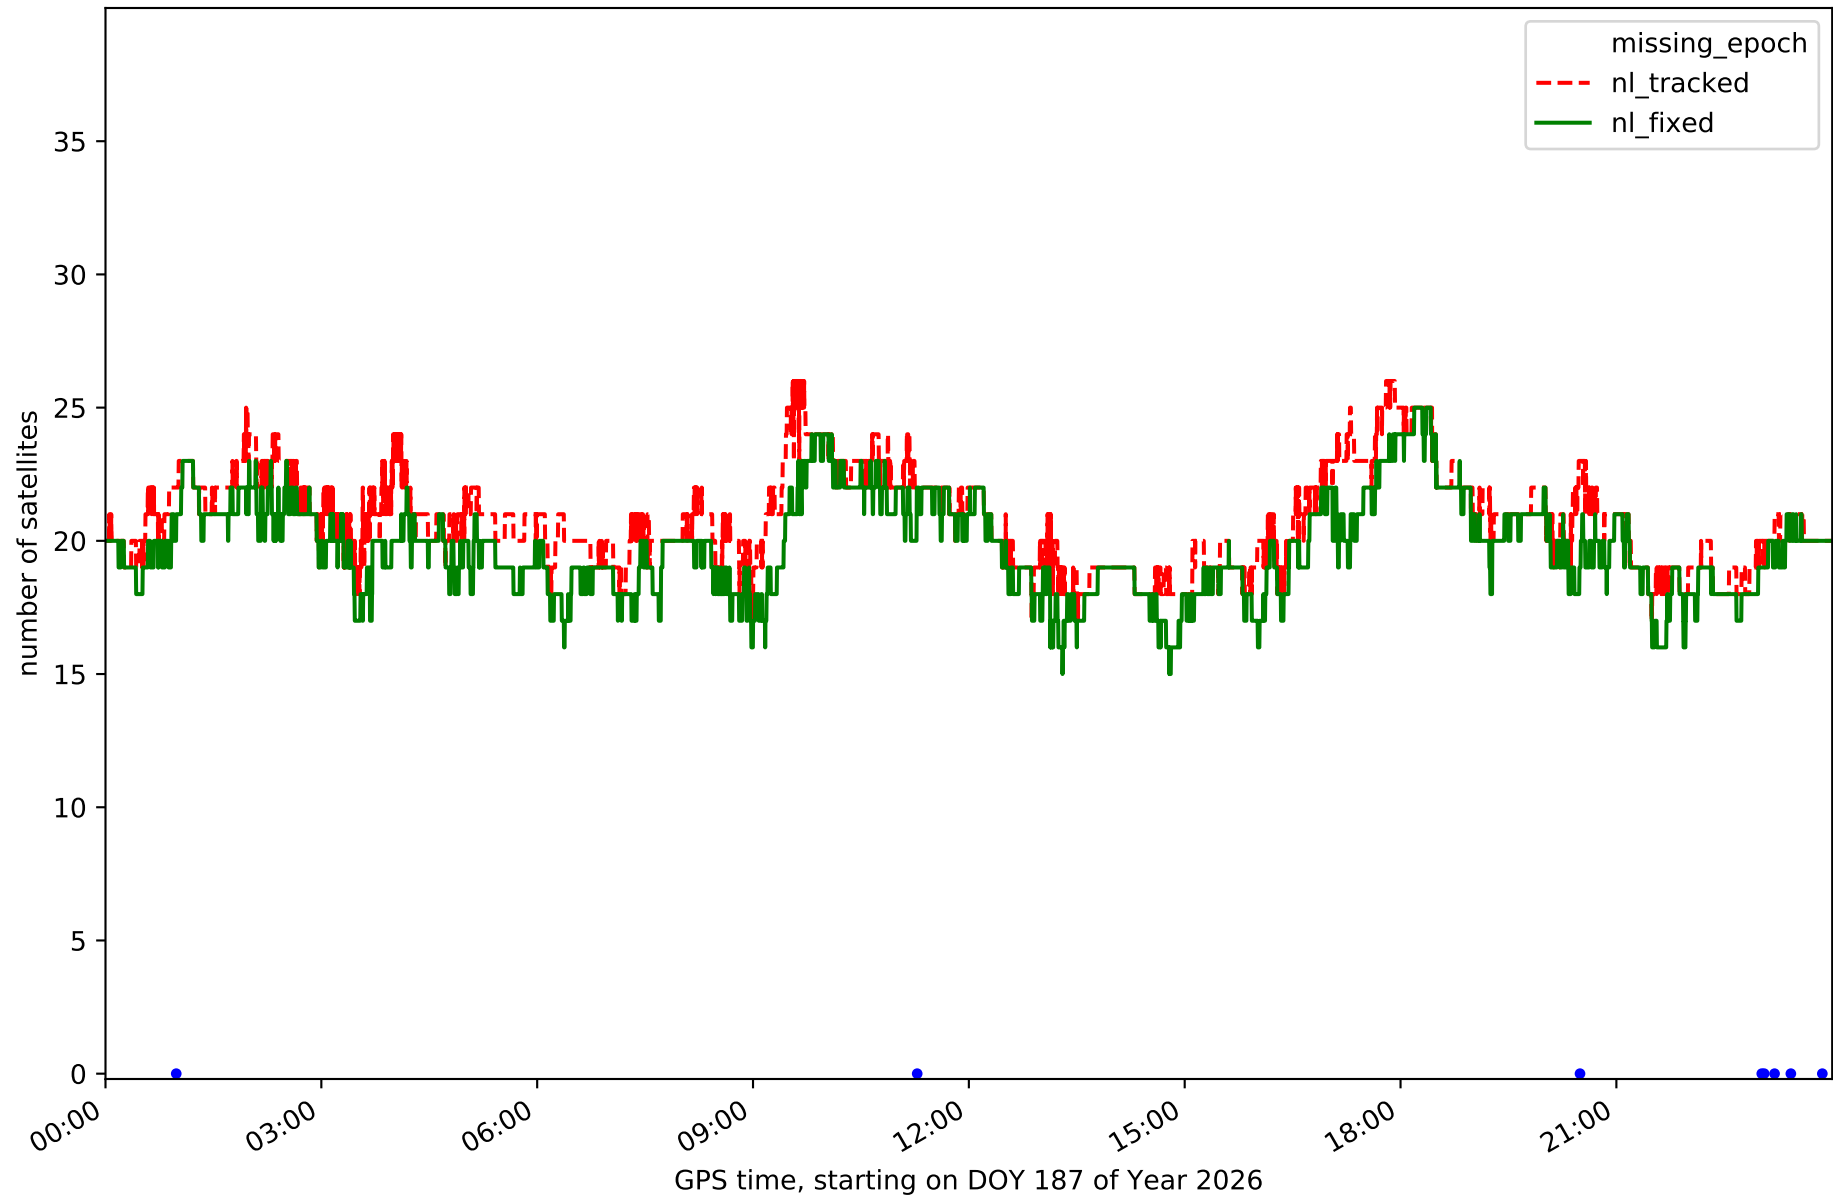


Station GOME in network N32T

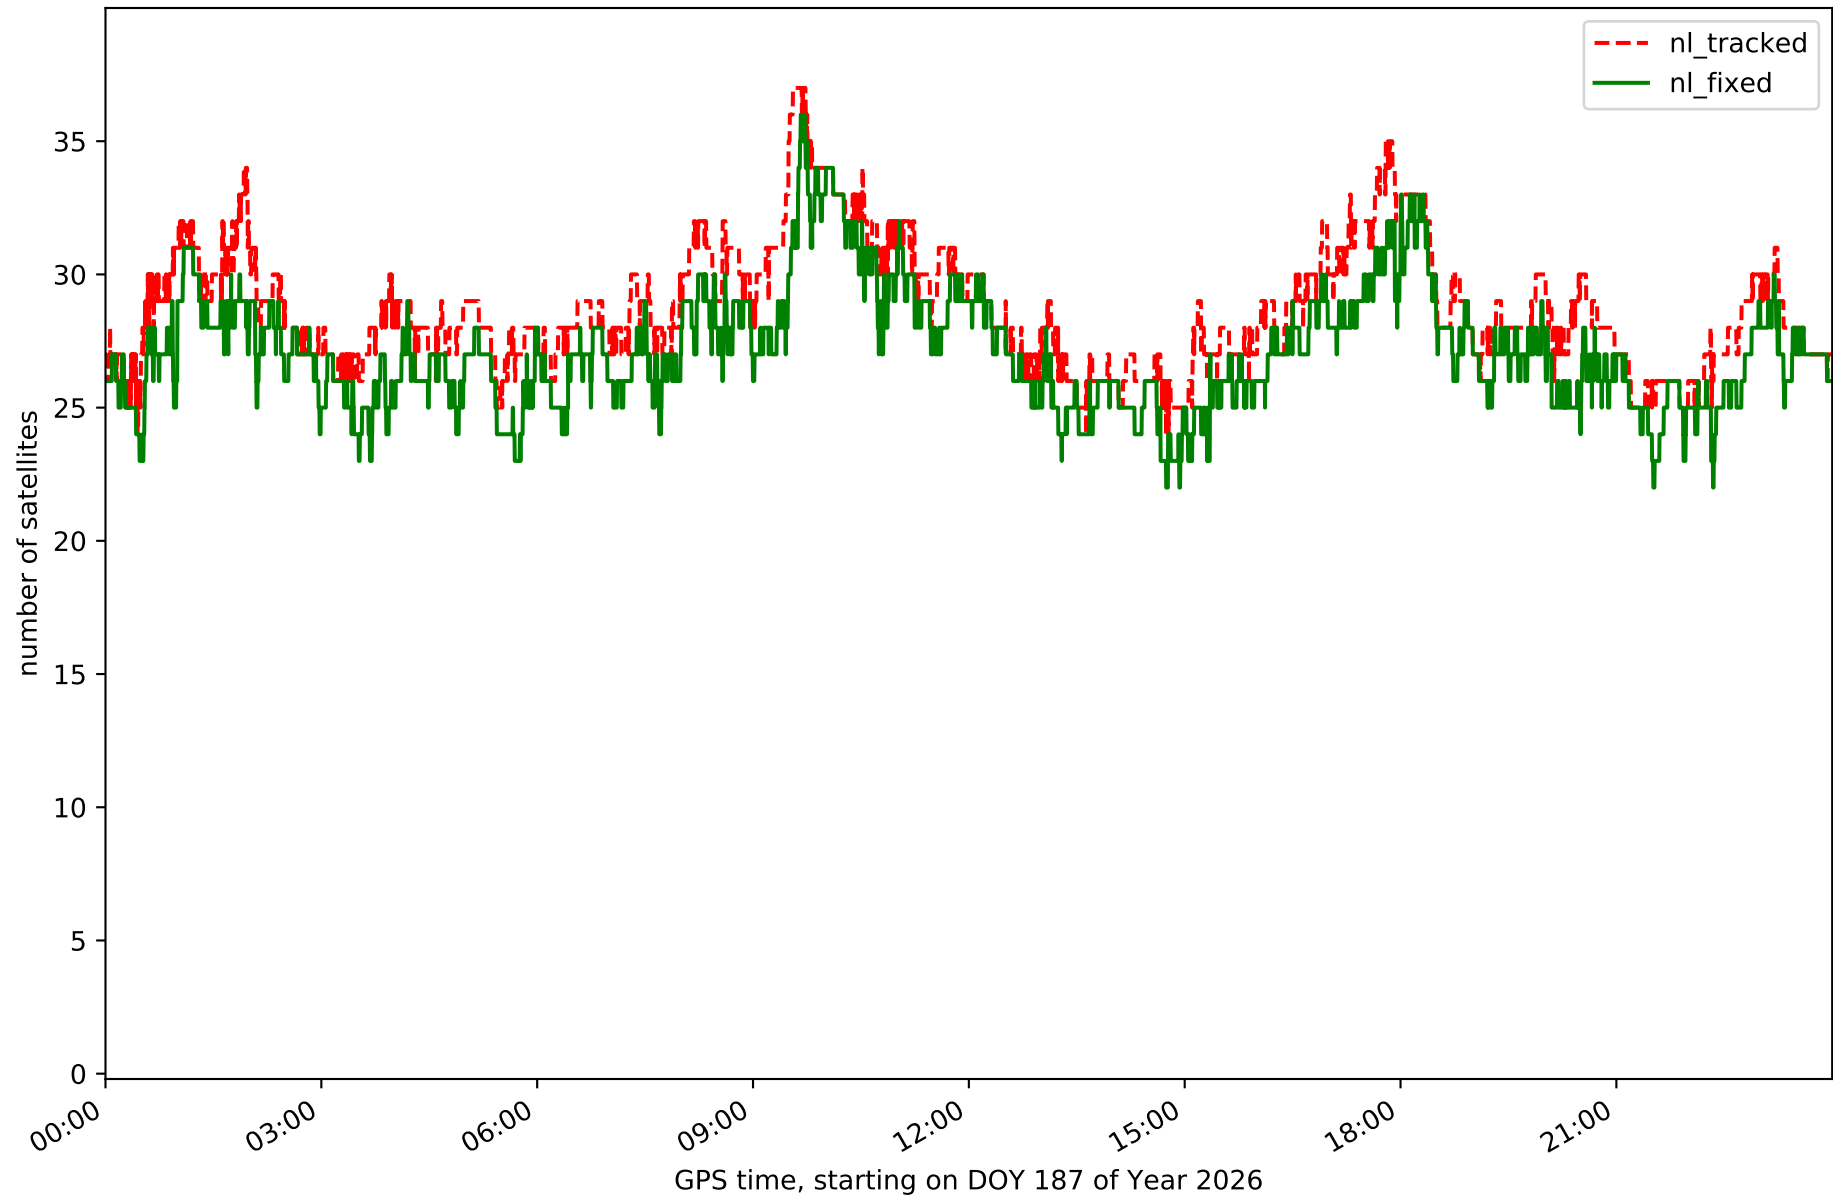


Station IZAN in network N32T

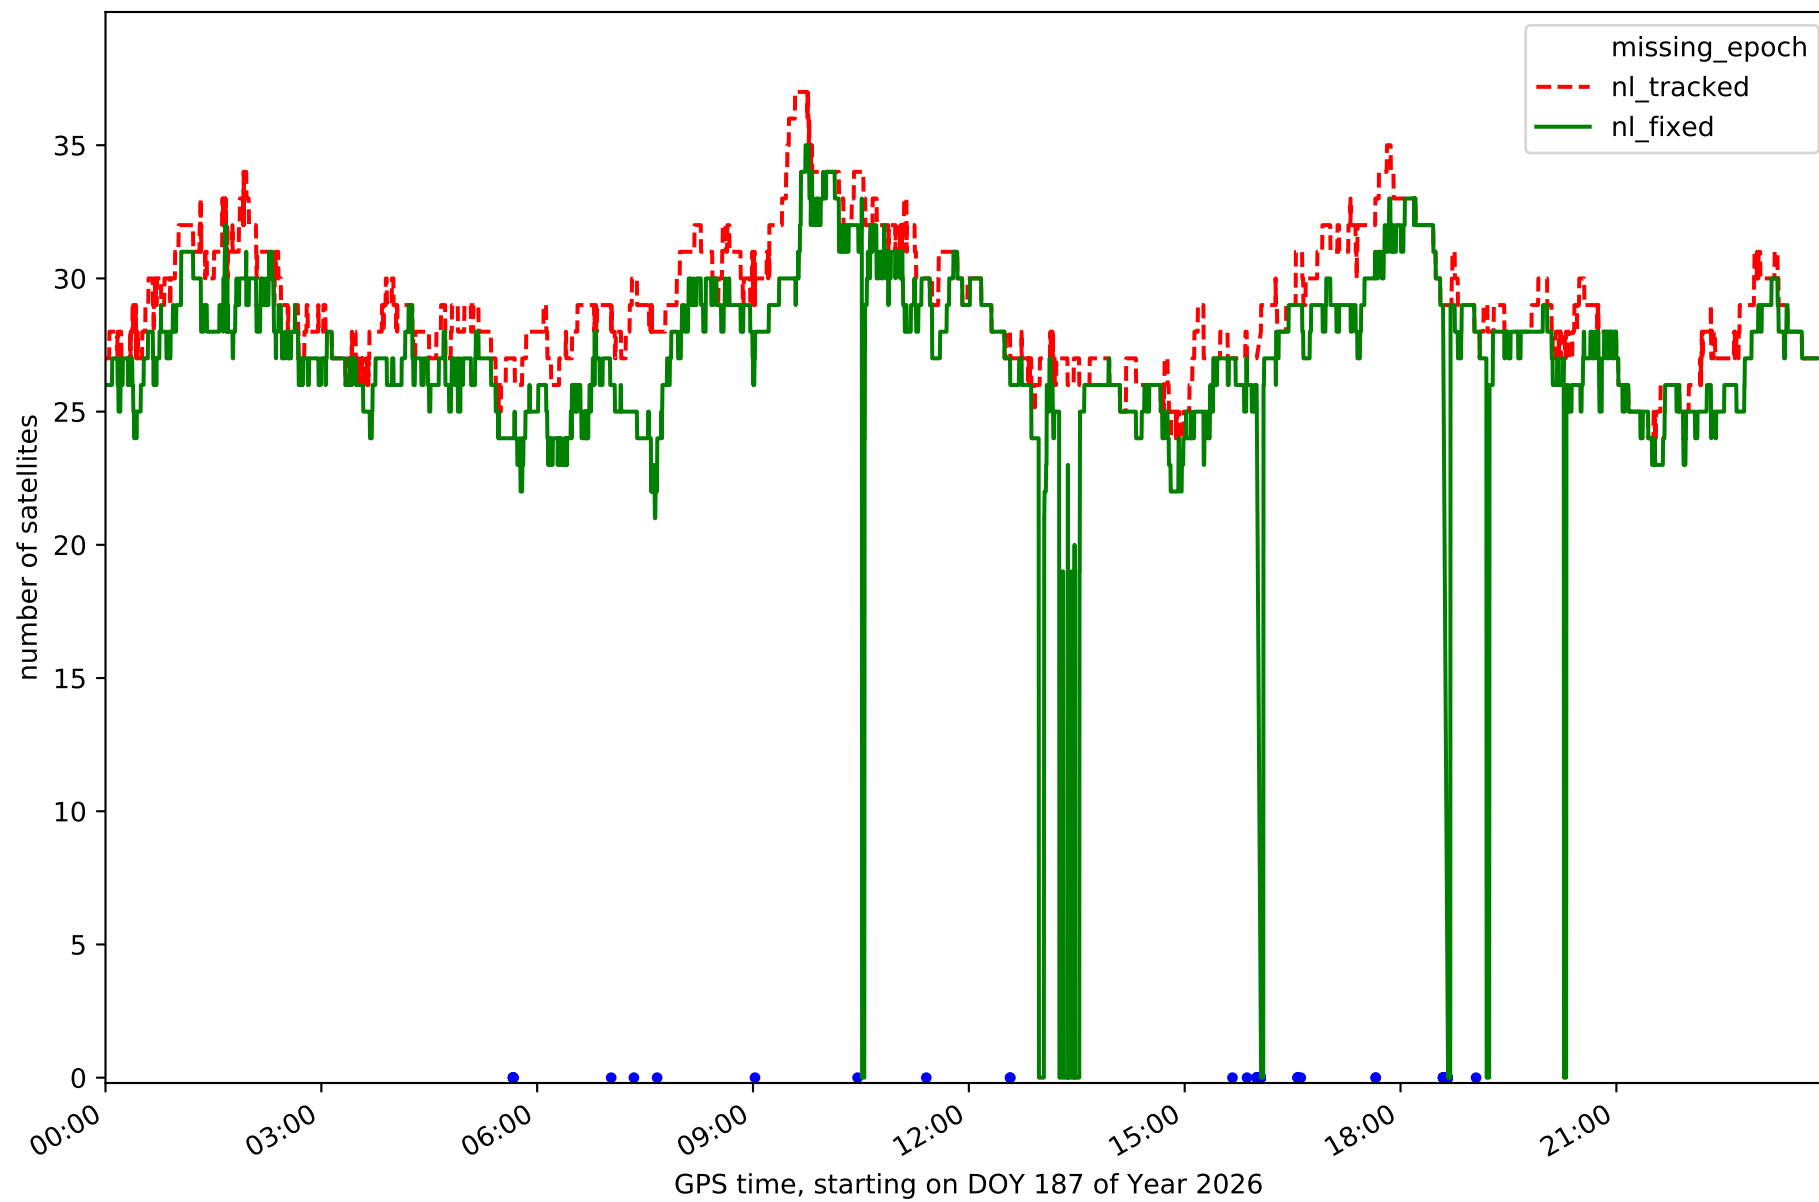


Station LP01 in network N32T

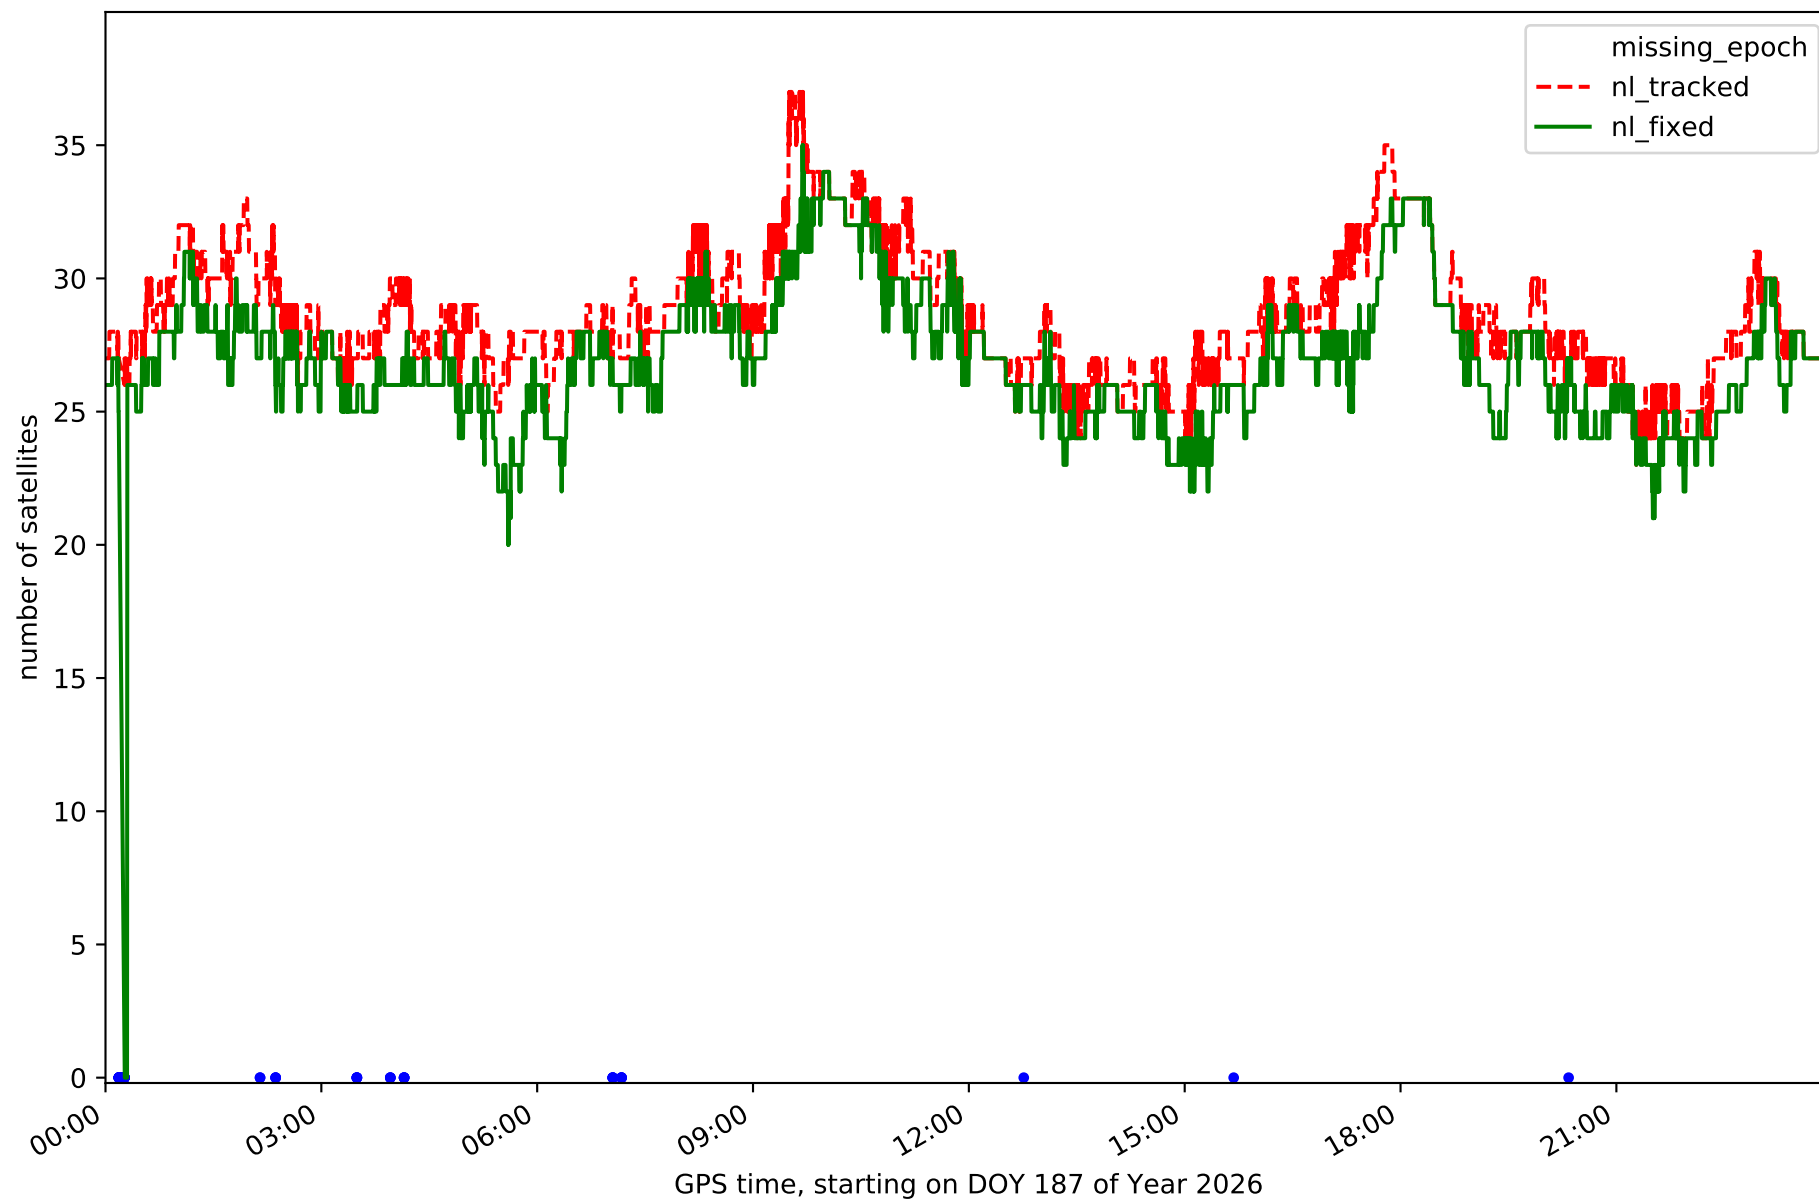


Station LP03 in network N32T

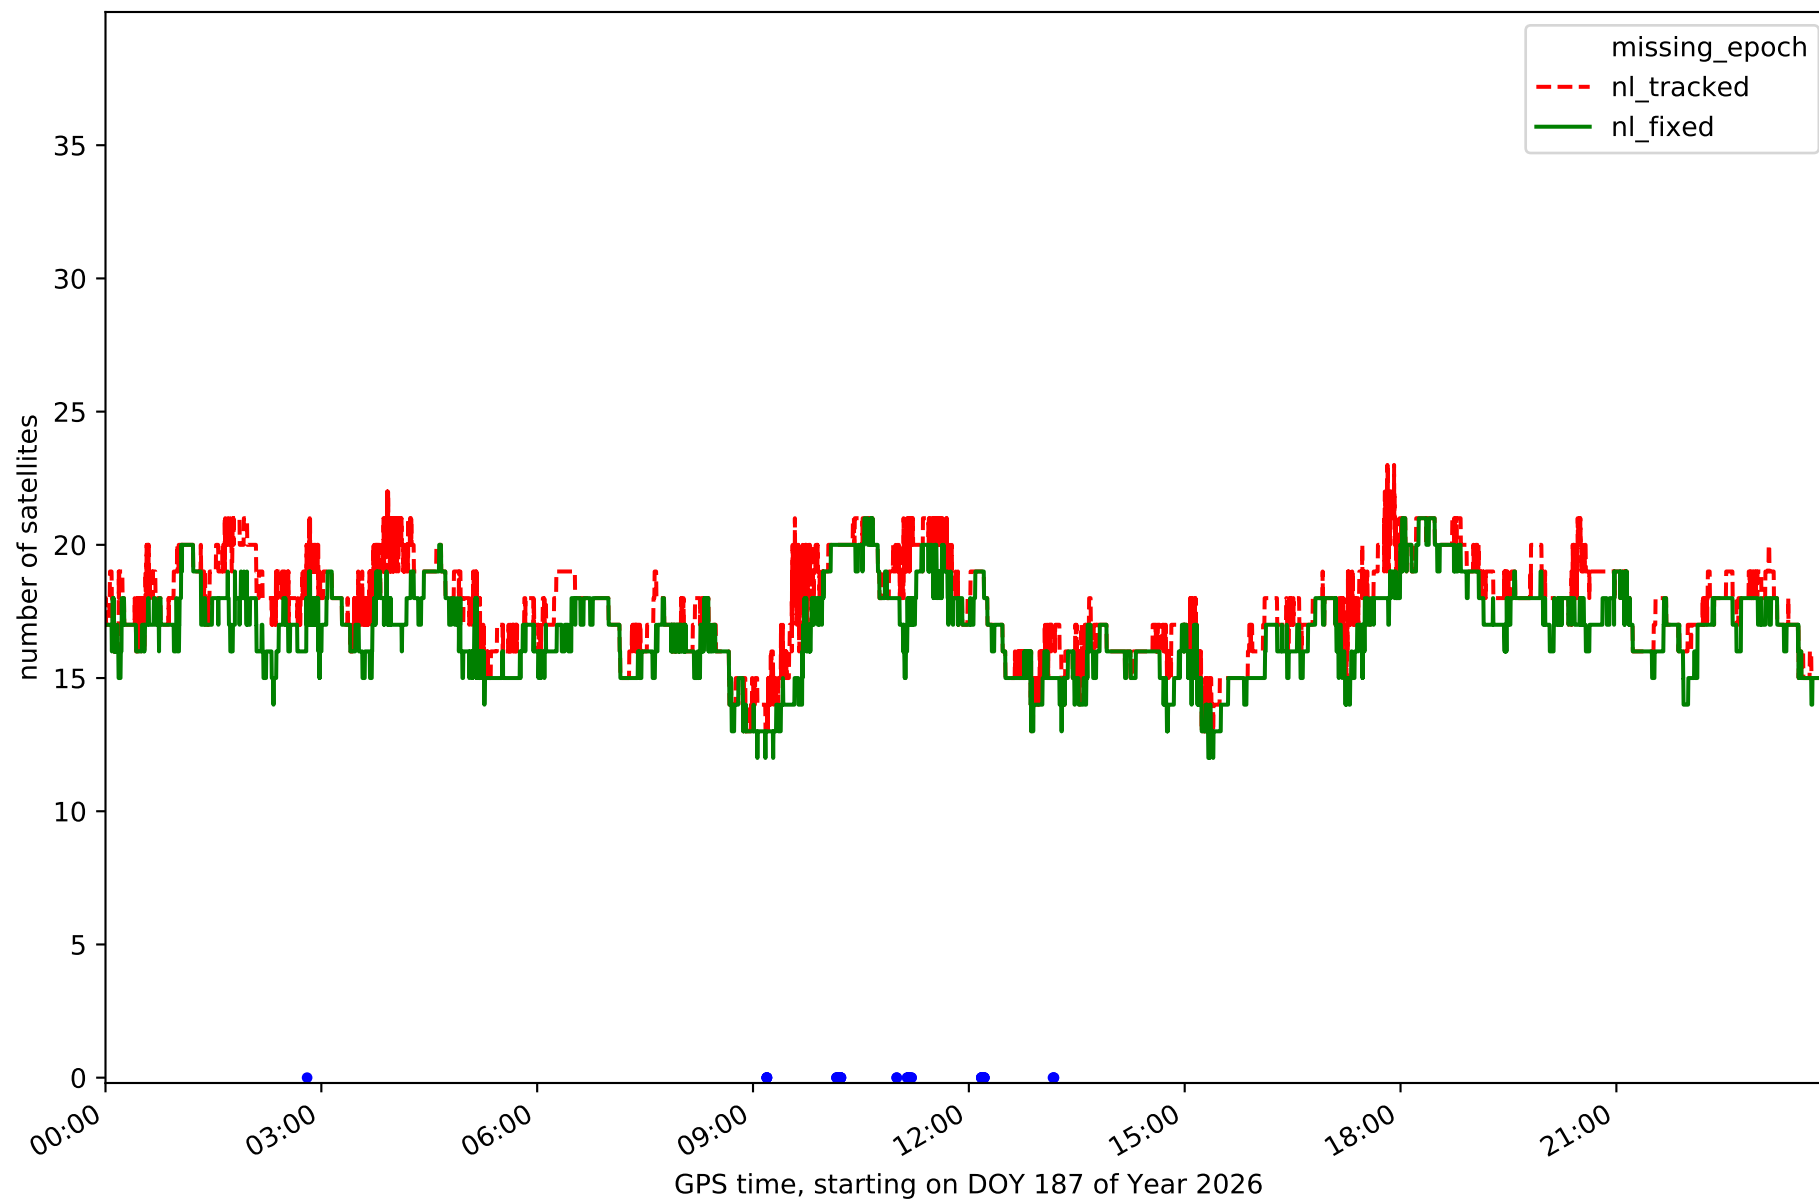


Station LPAL in network N32T

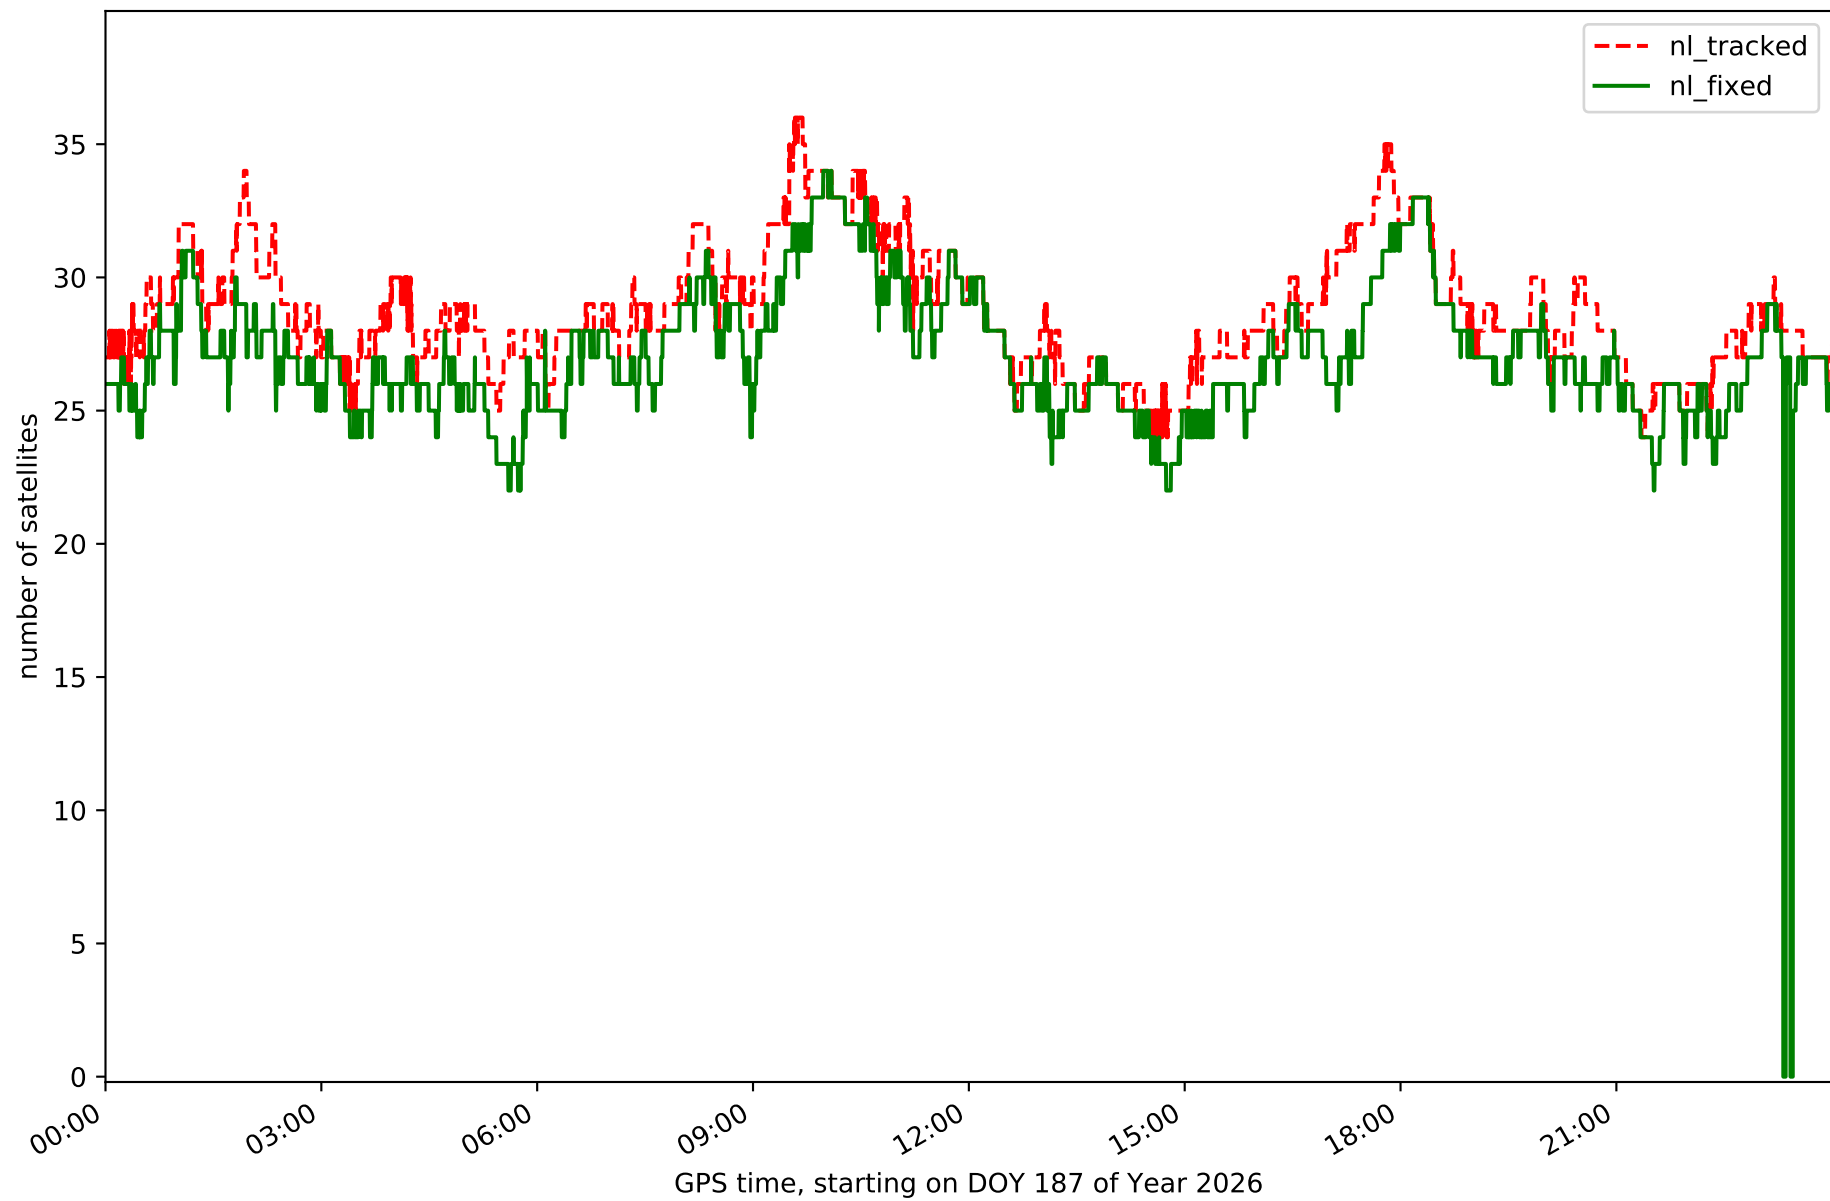


Station LRES in network N32T

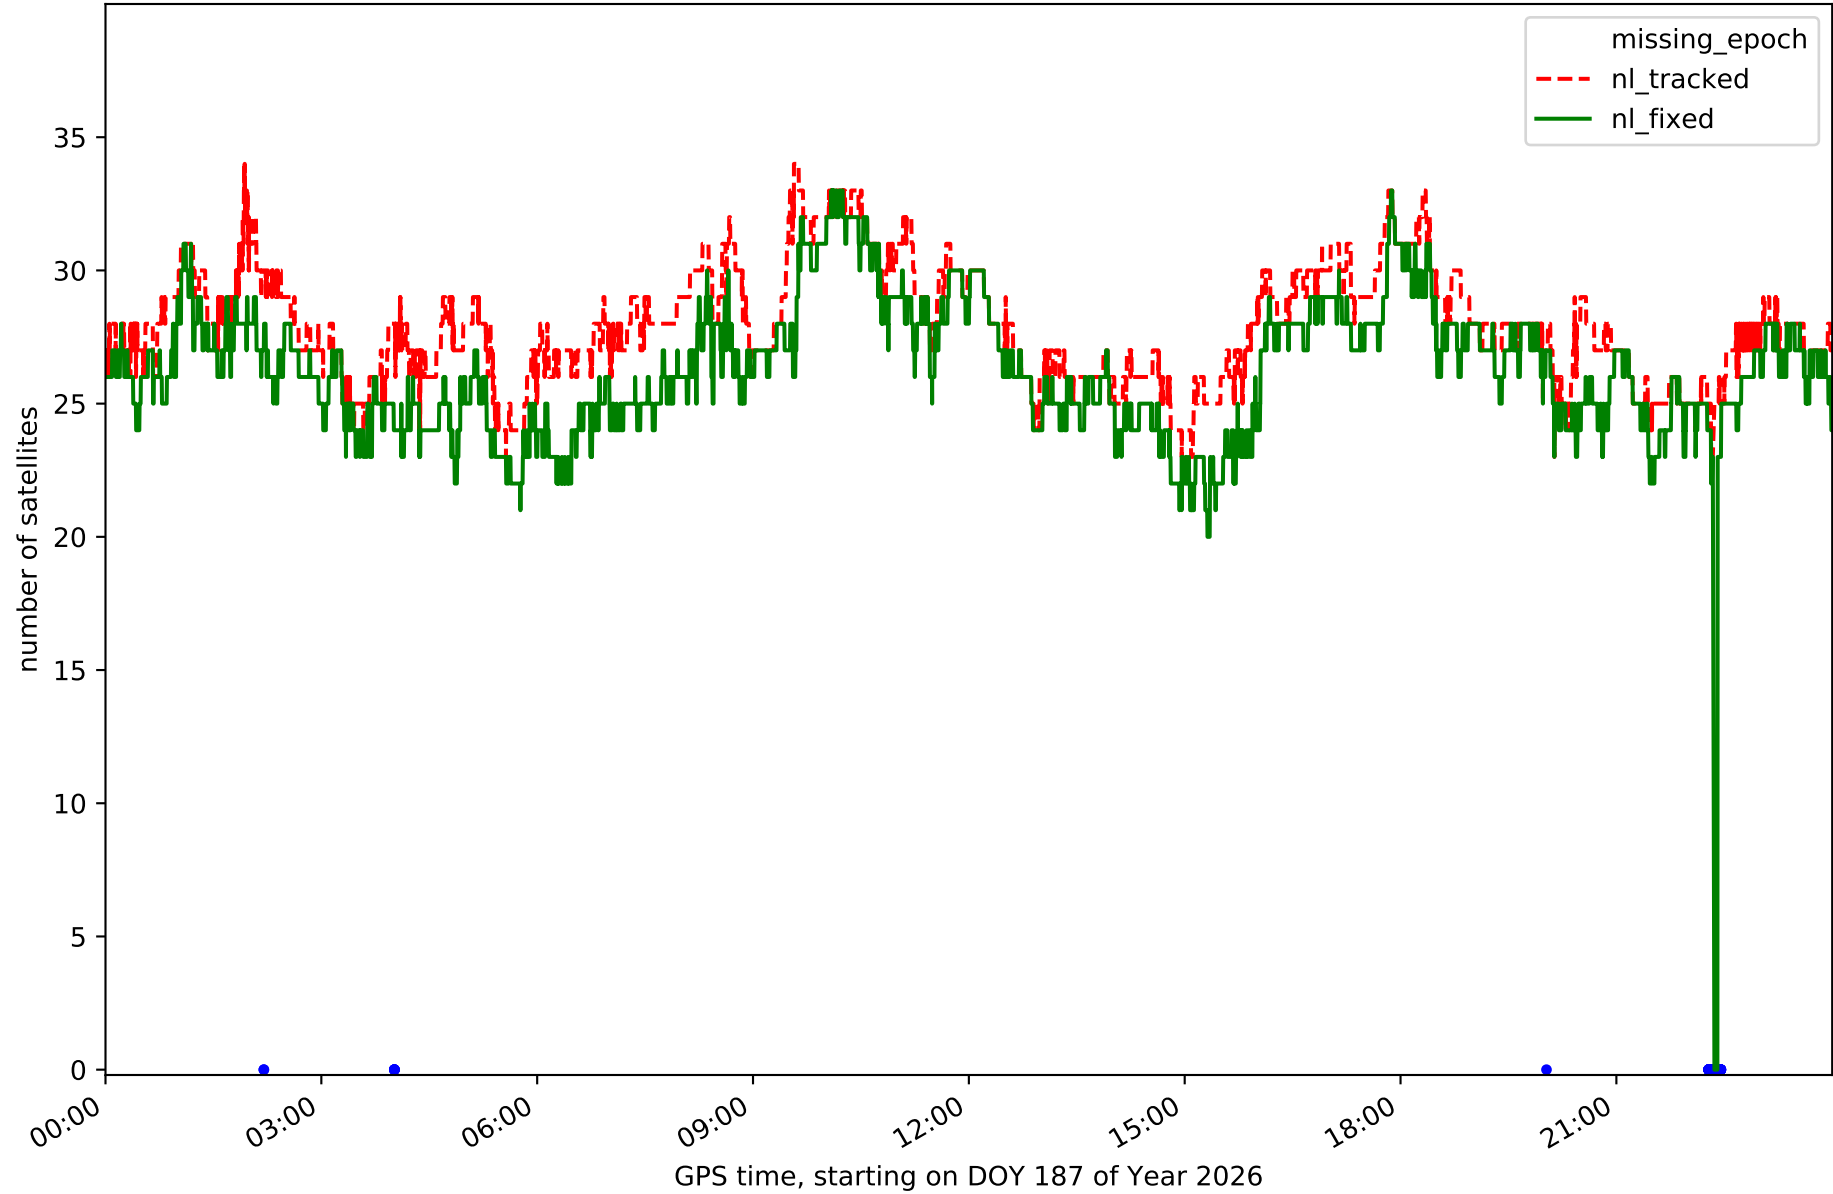


Station TN01 in network N32T

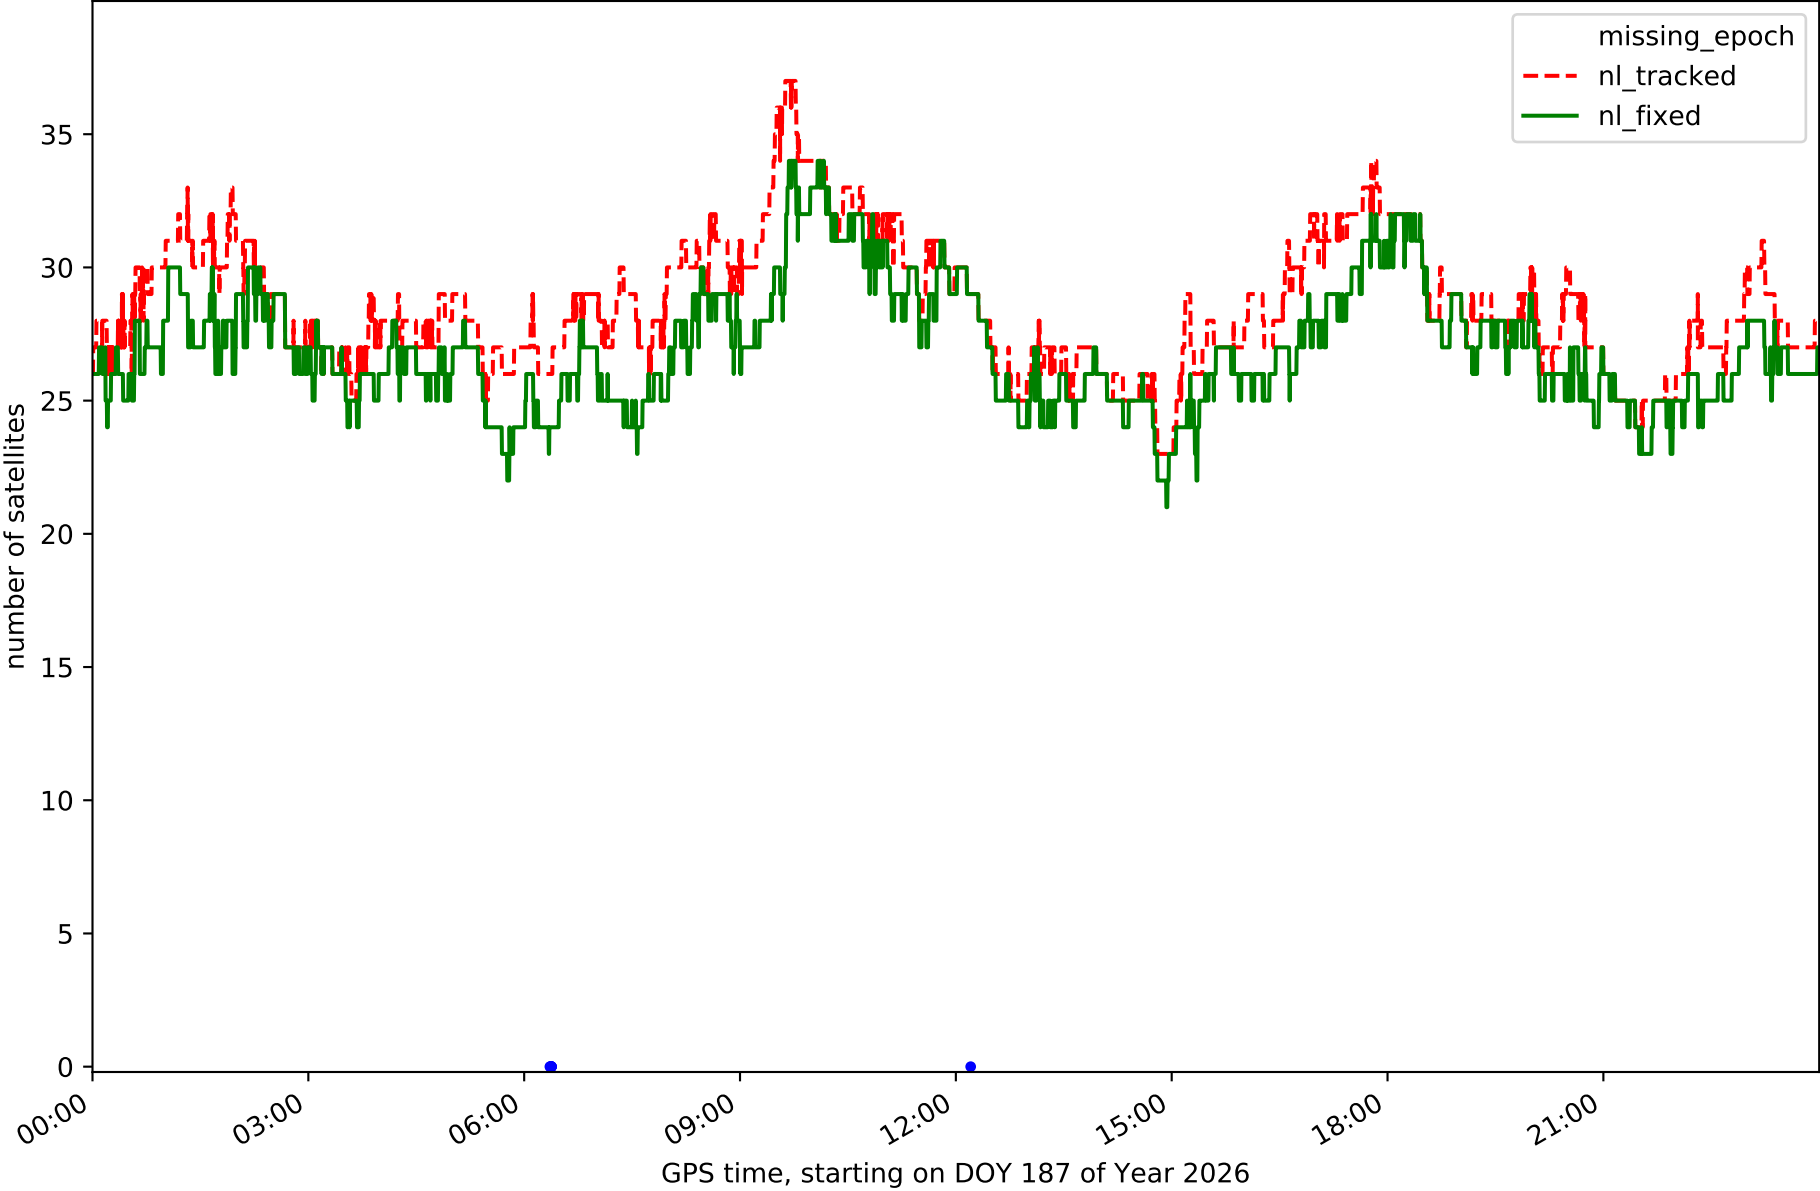


Station TN02 in network N32T

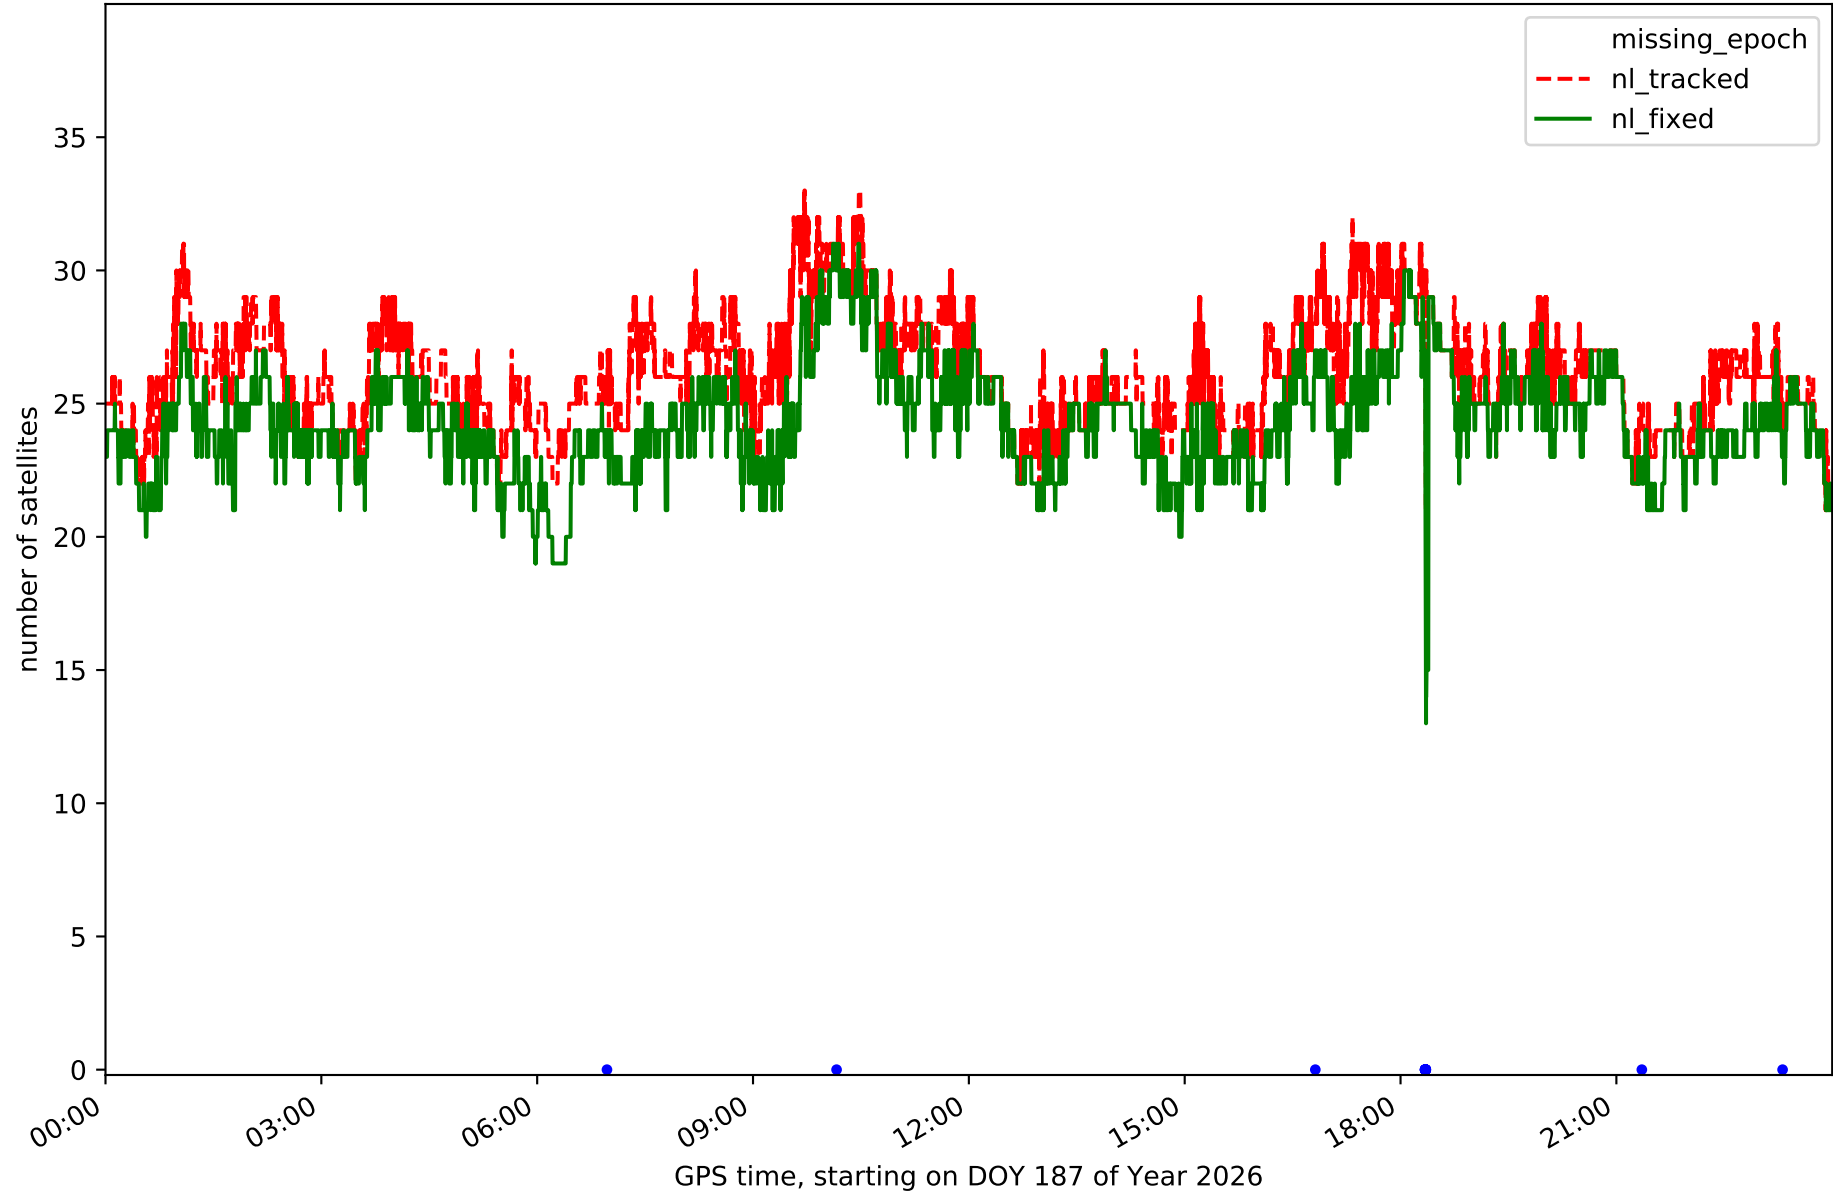


Station TN03 in network N32T

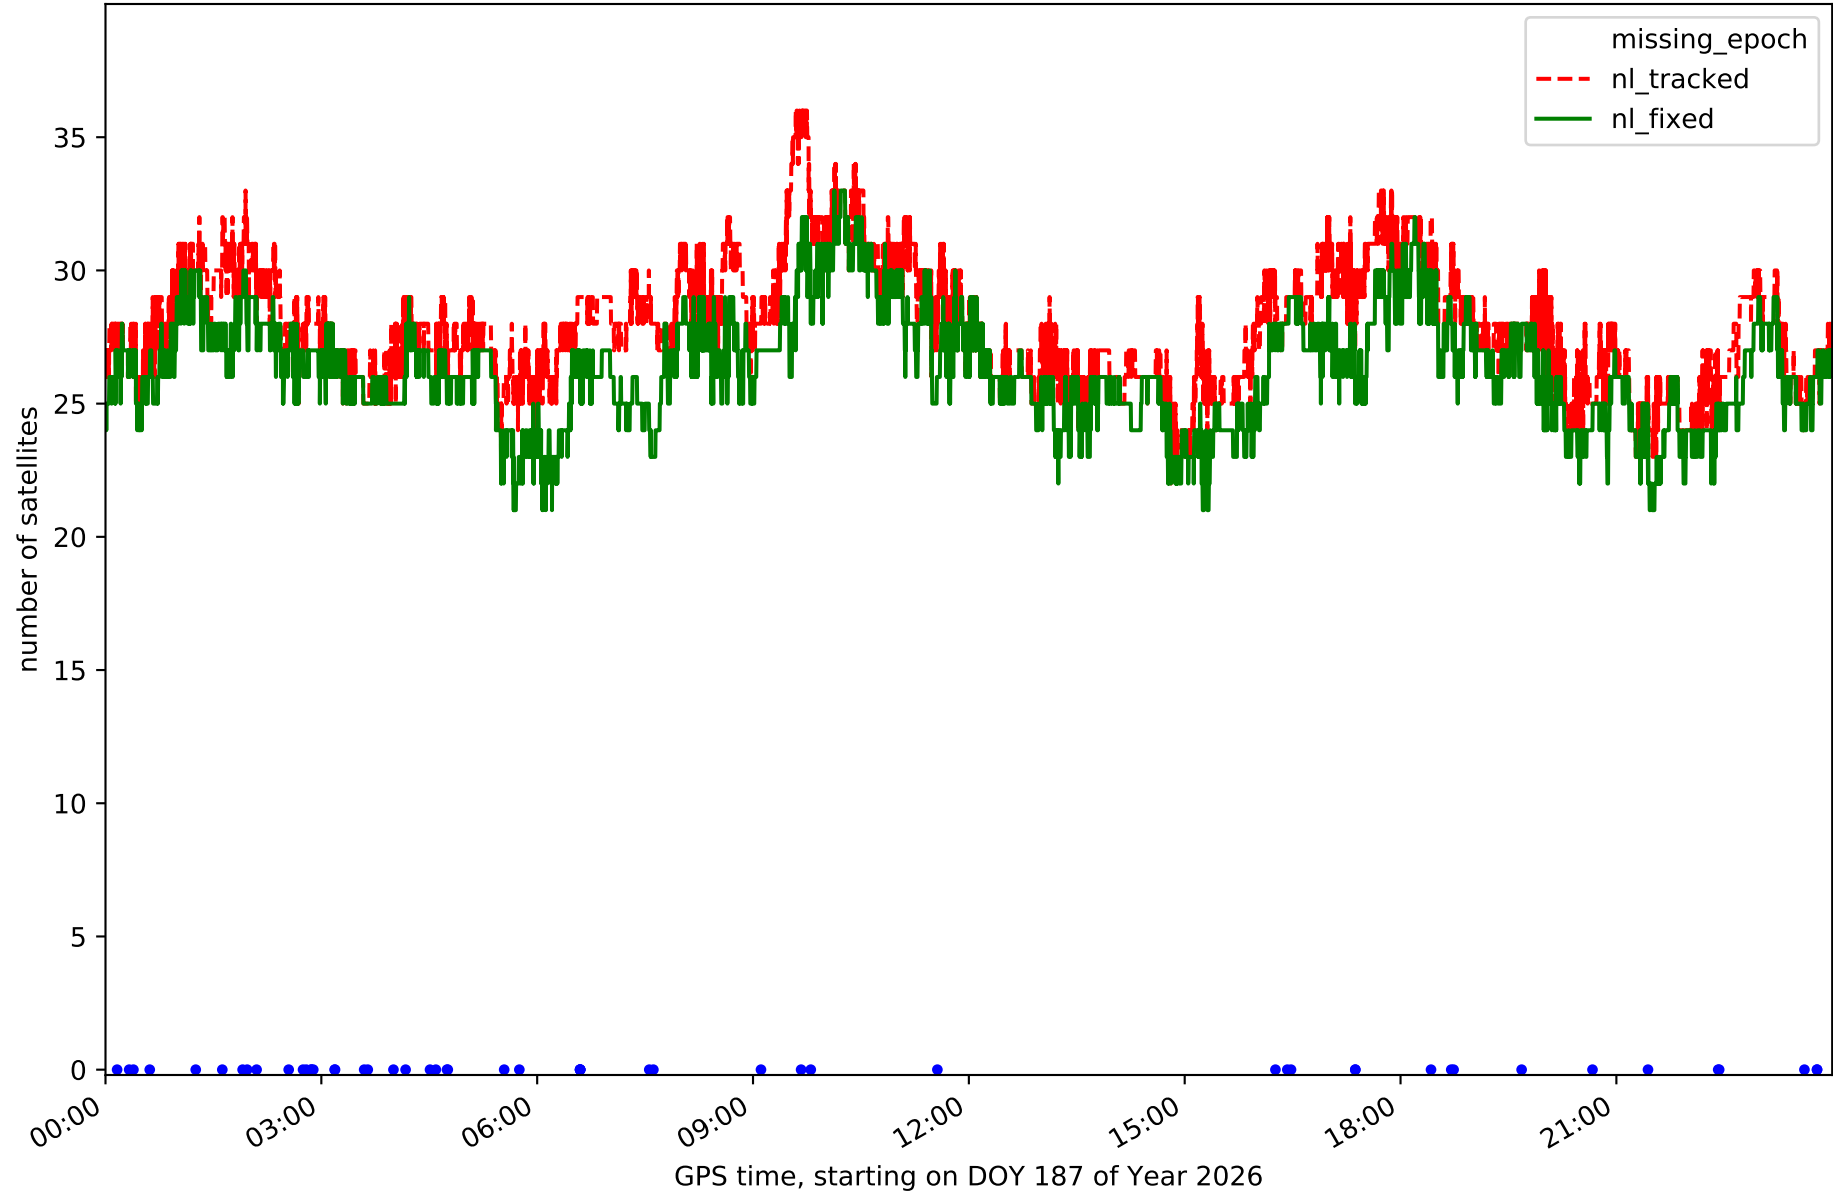


Station TN06 in network N32T

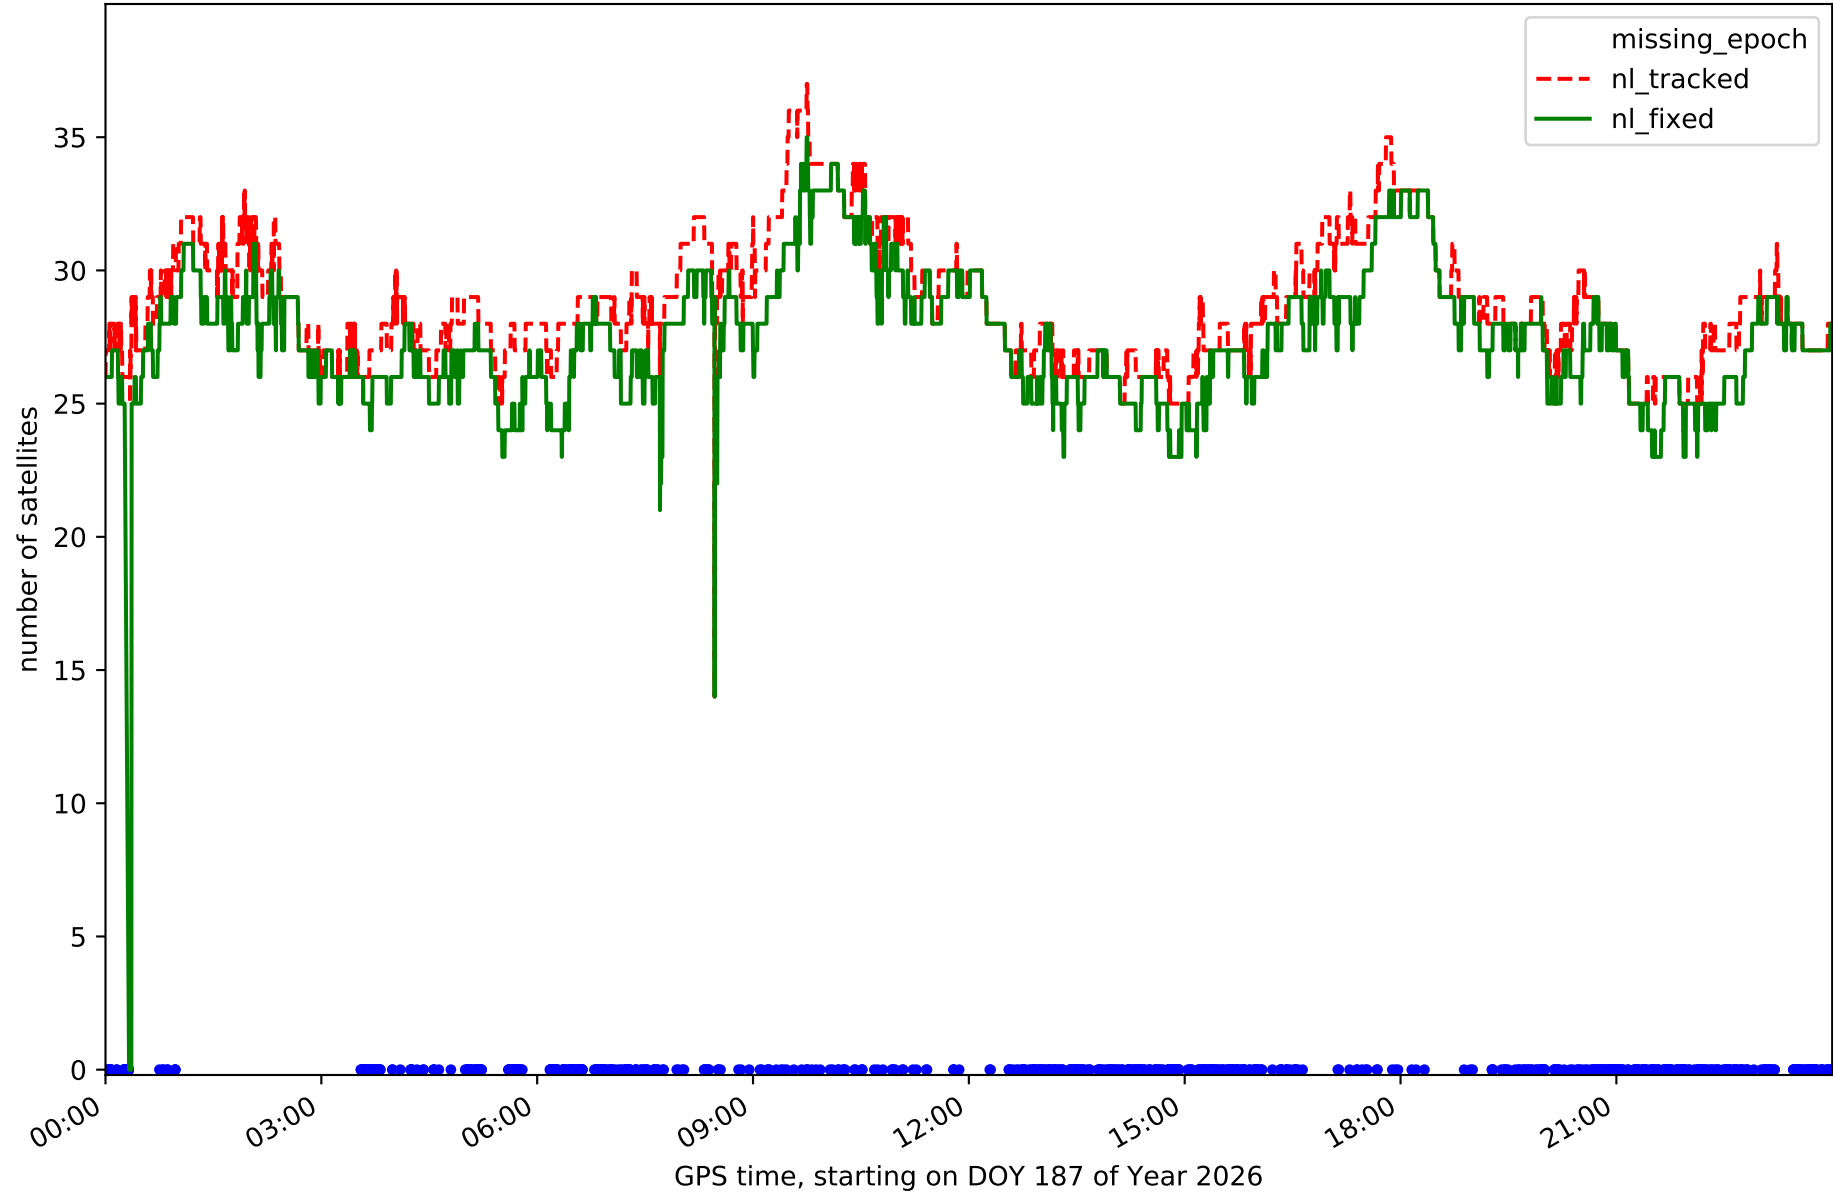


Station TN09 in network N32T

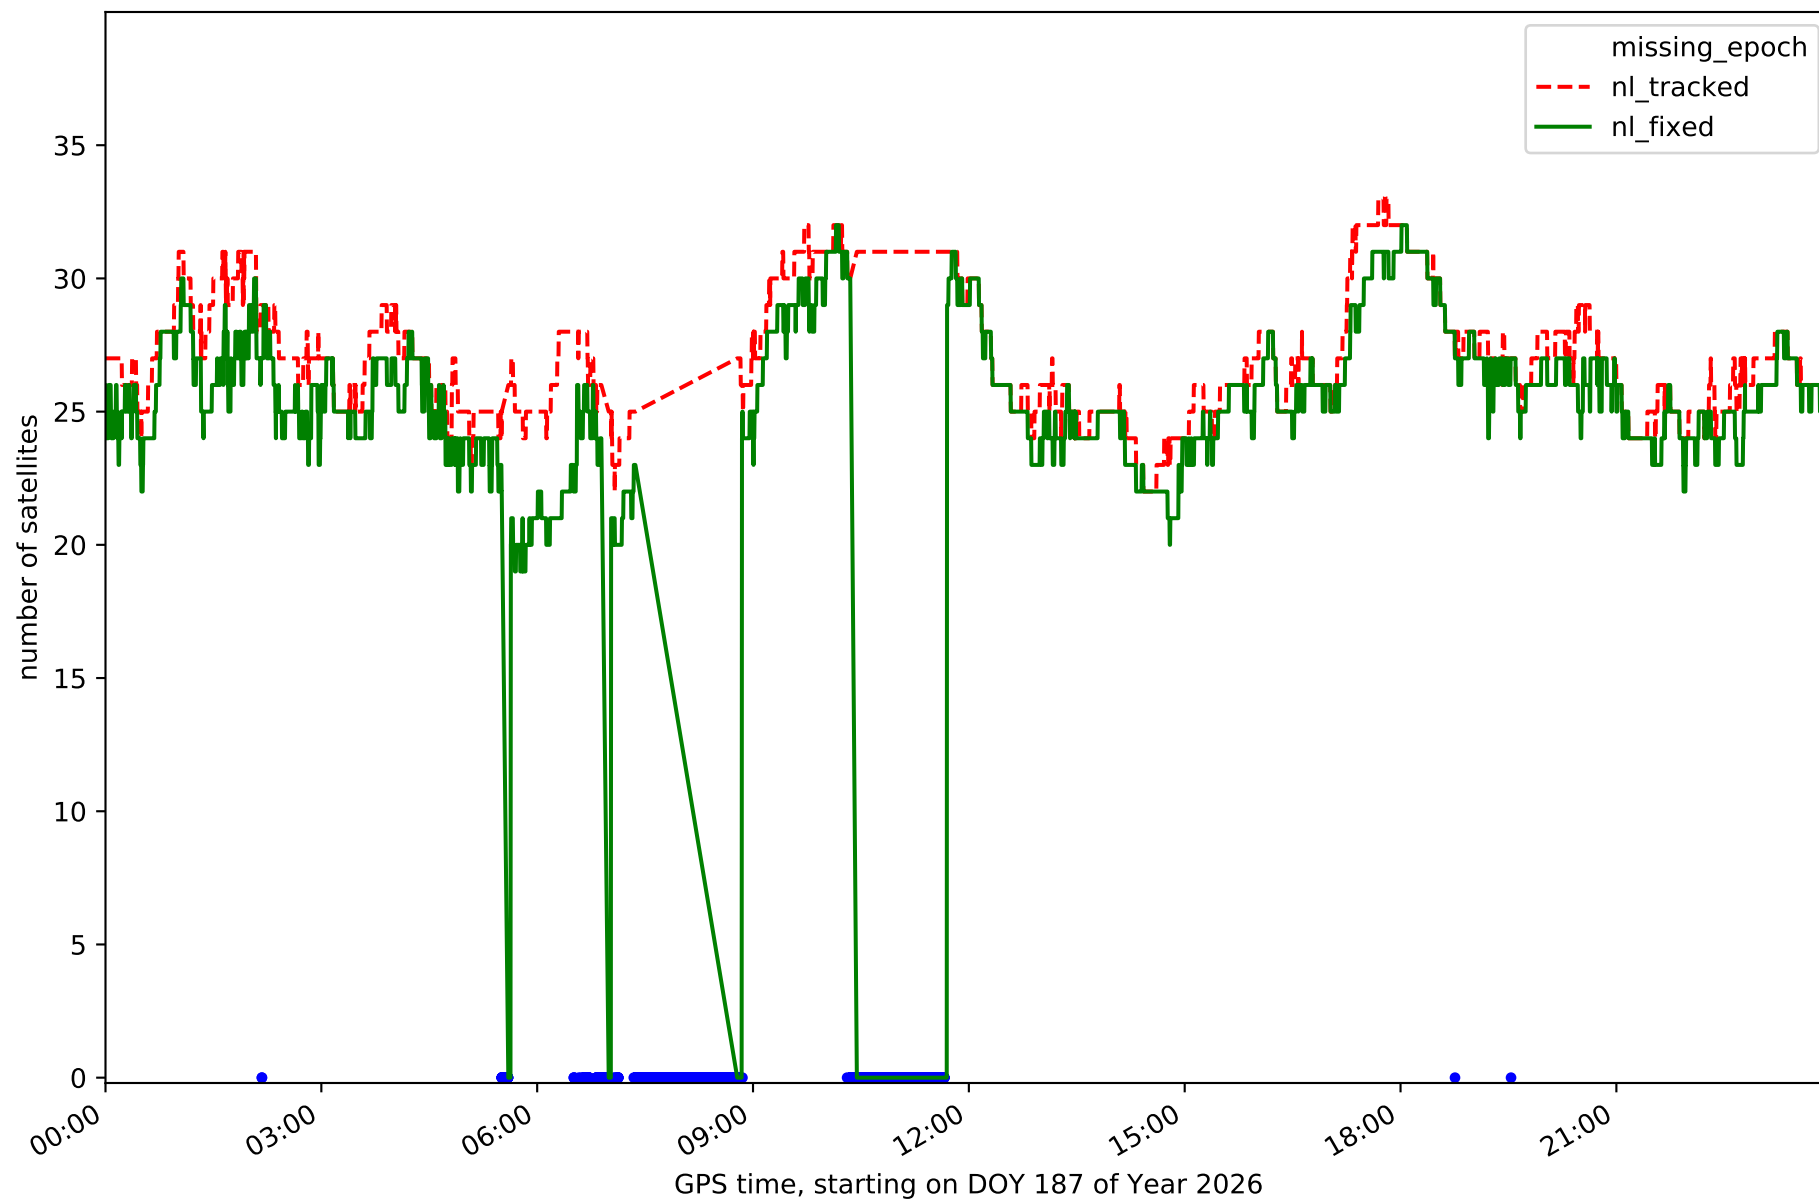


Station TE11 in network N32T

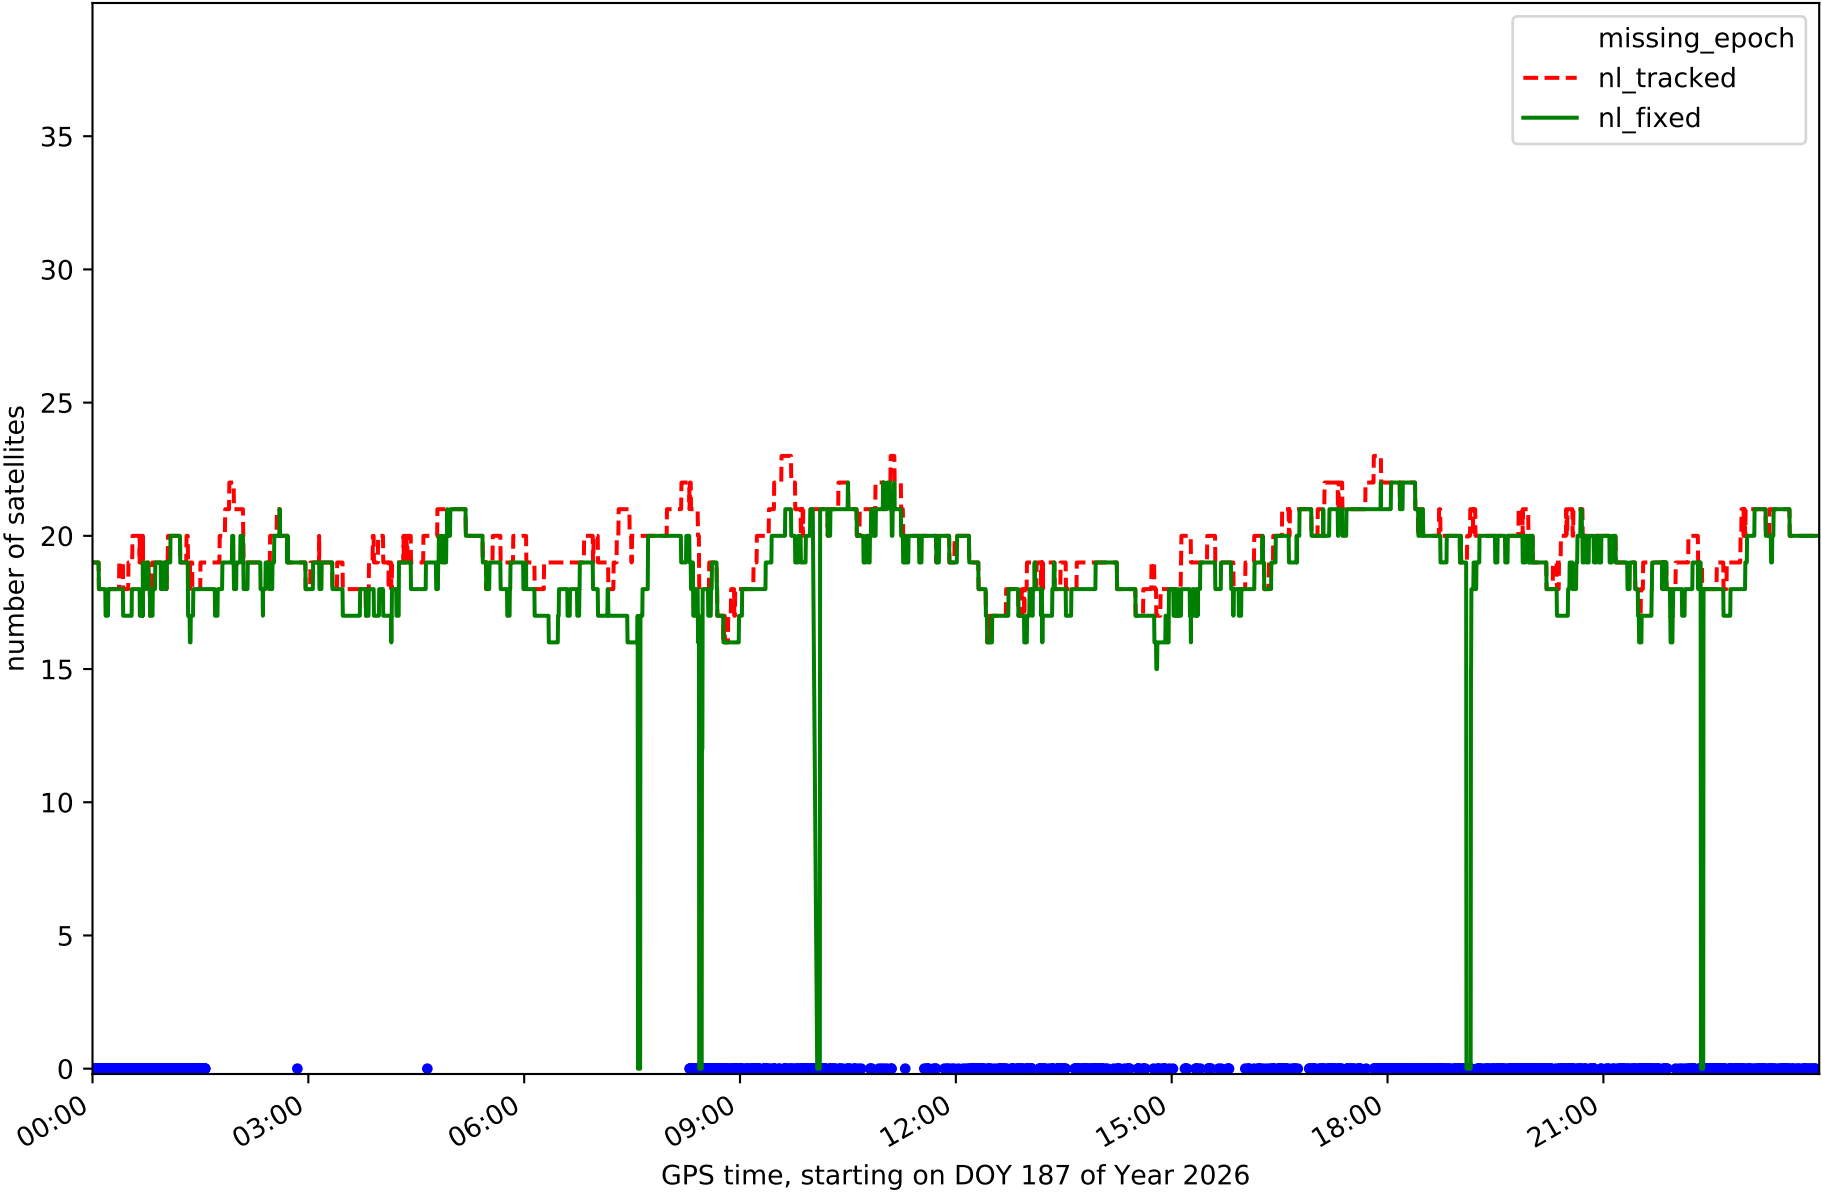


RefCheck for station EH01 in network N32T

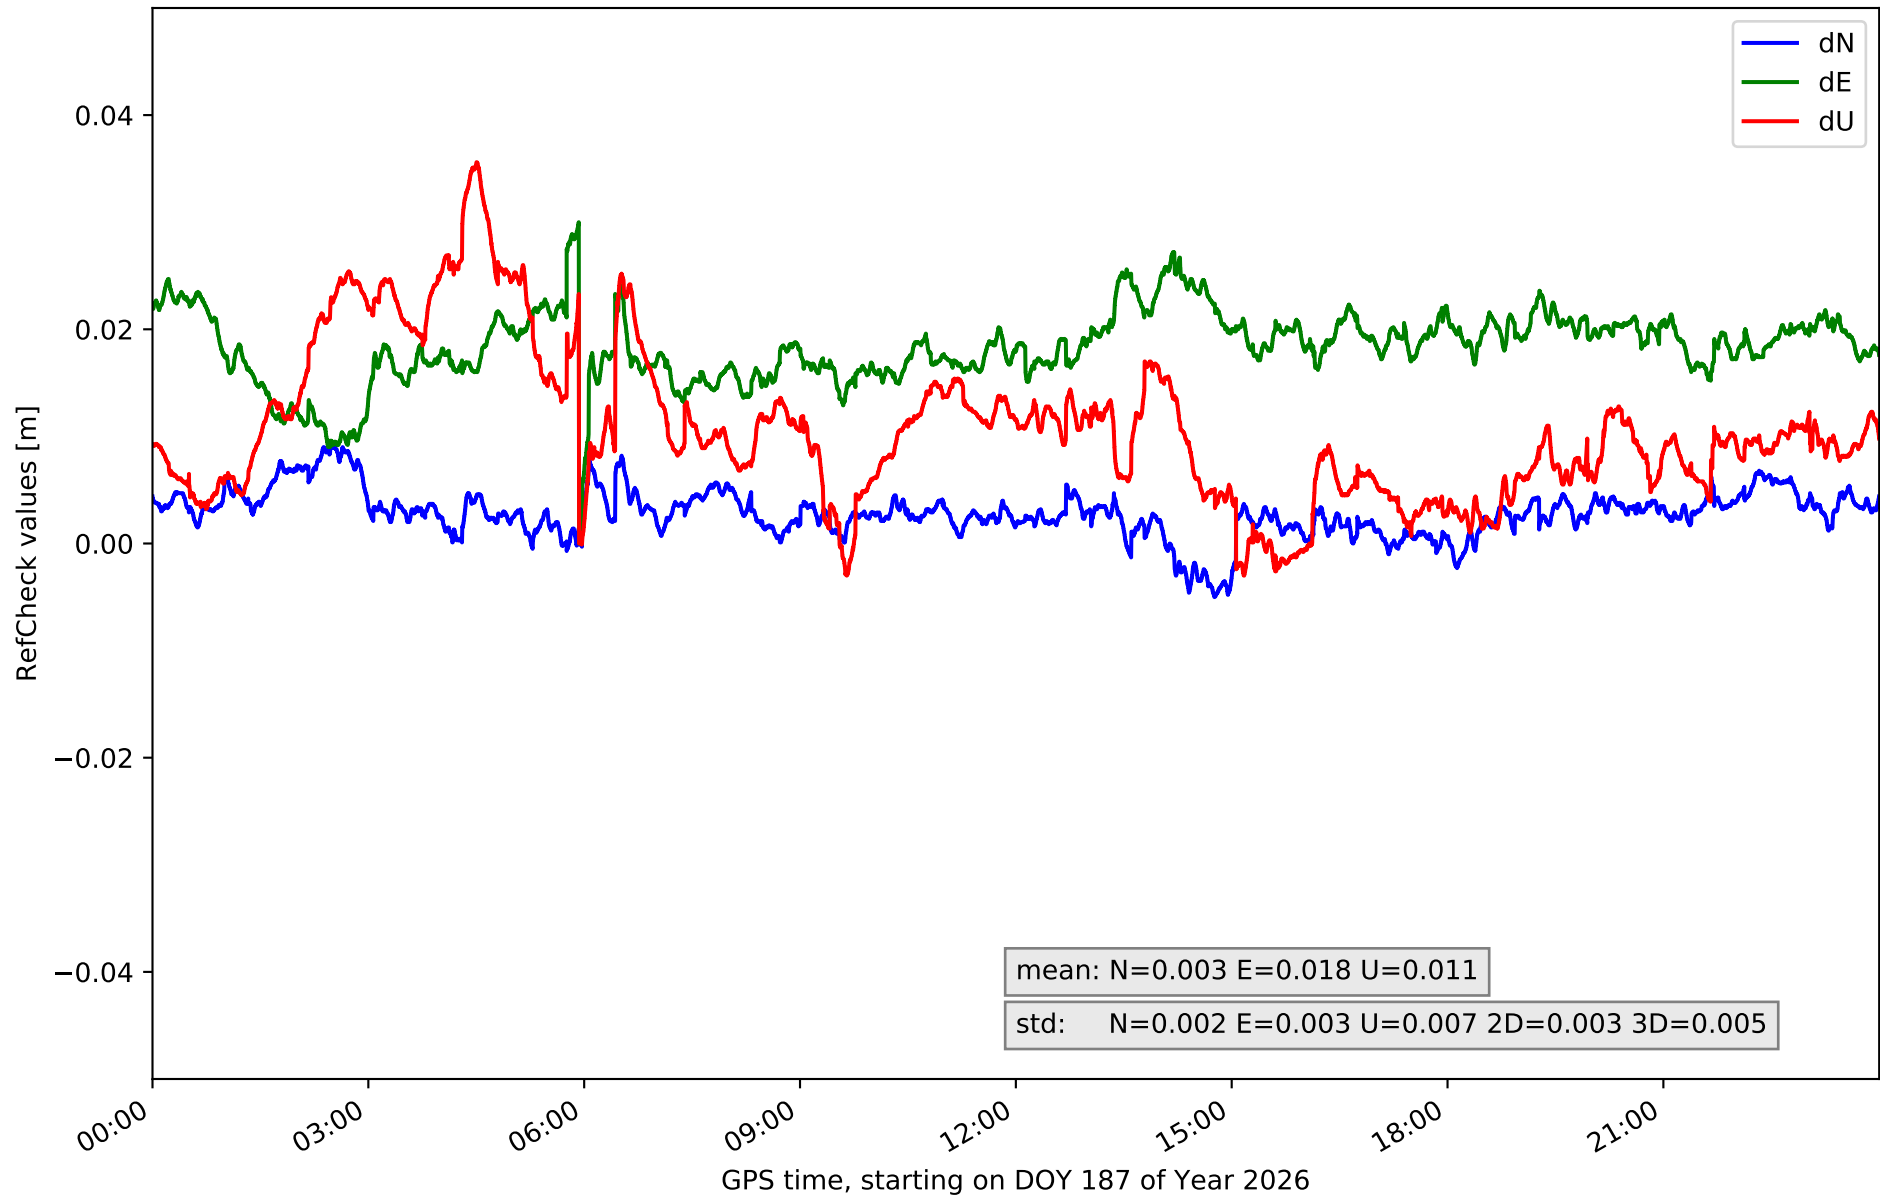


RefCheck for station EH02 in network N32T

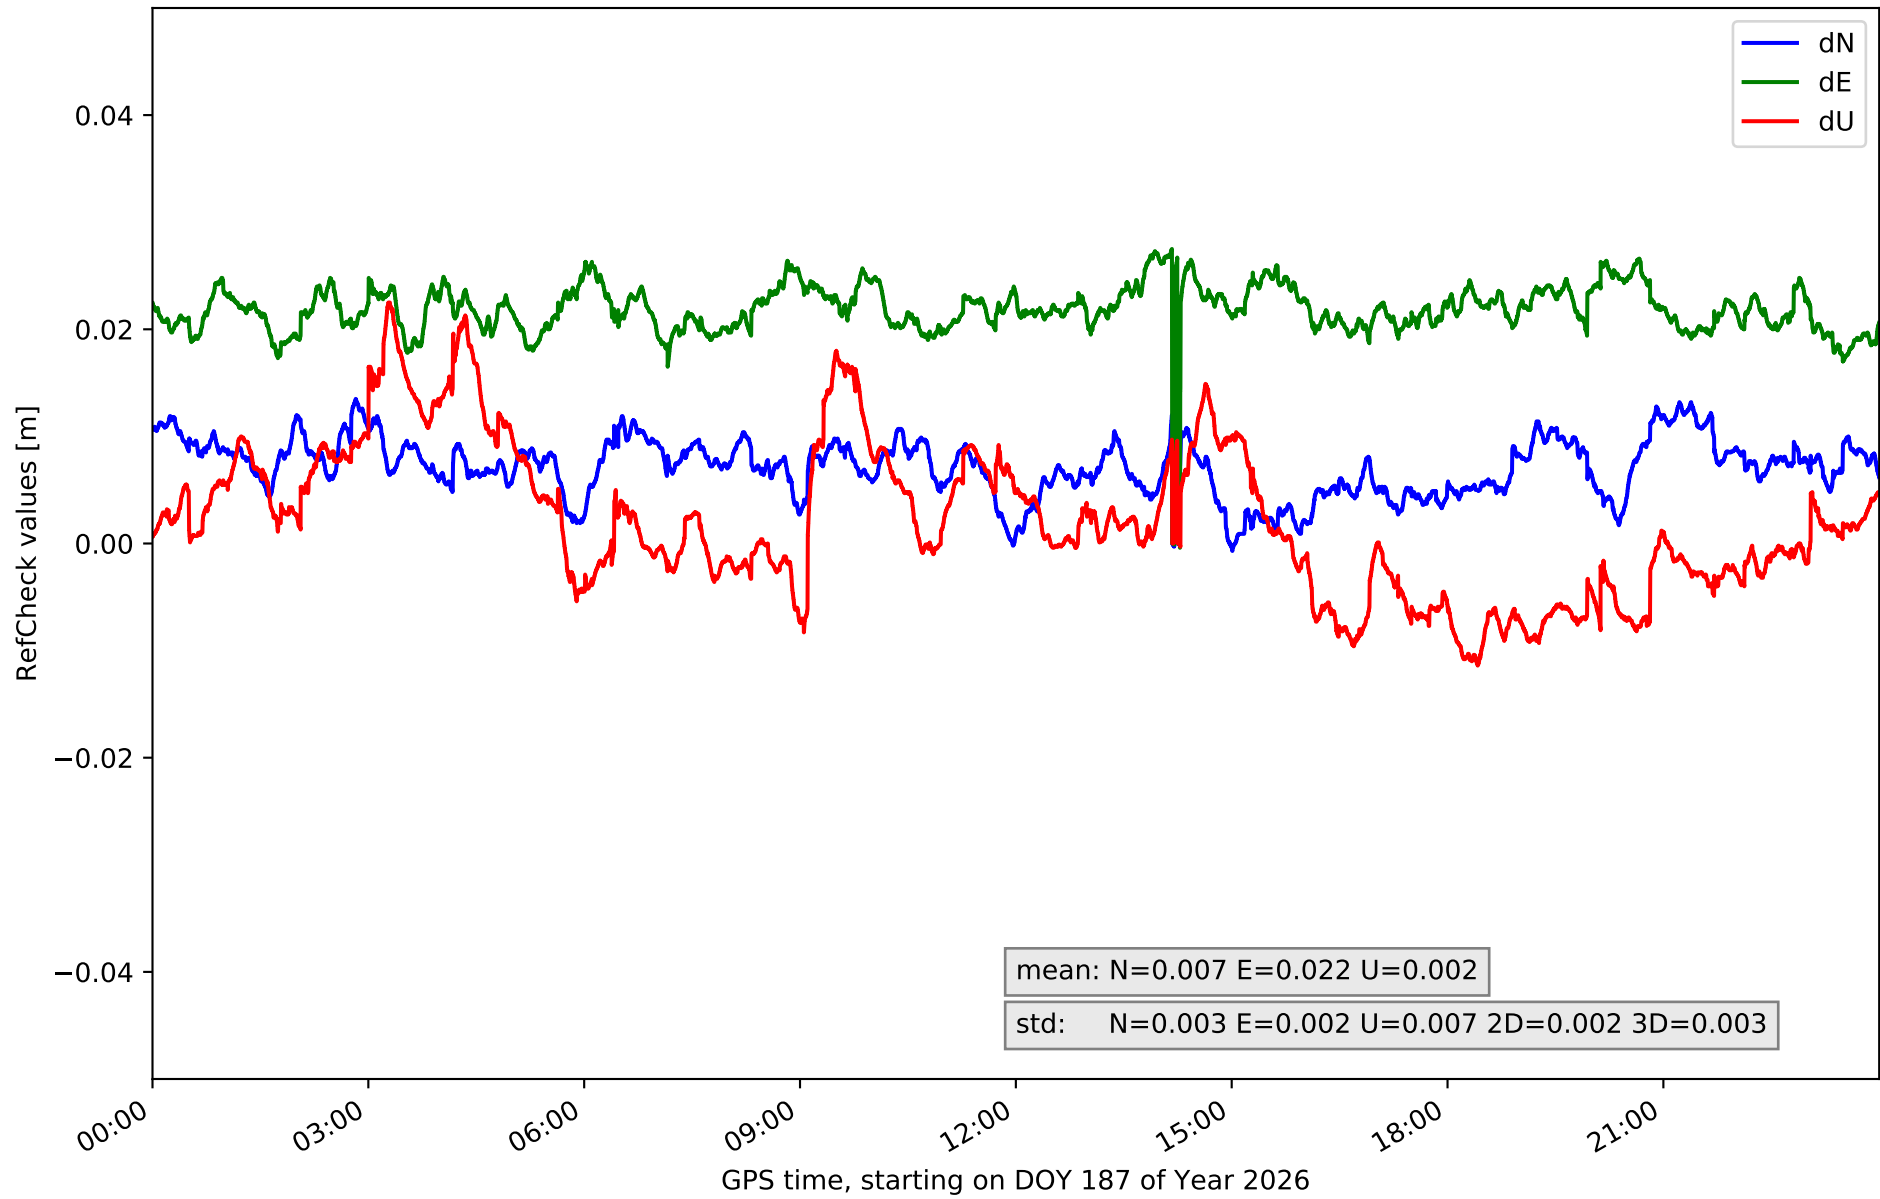


RefCheck for station GOM1 in network N32T

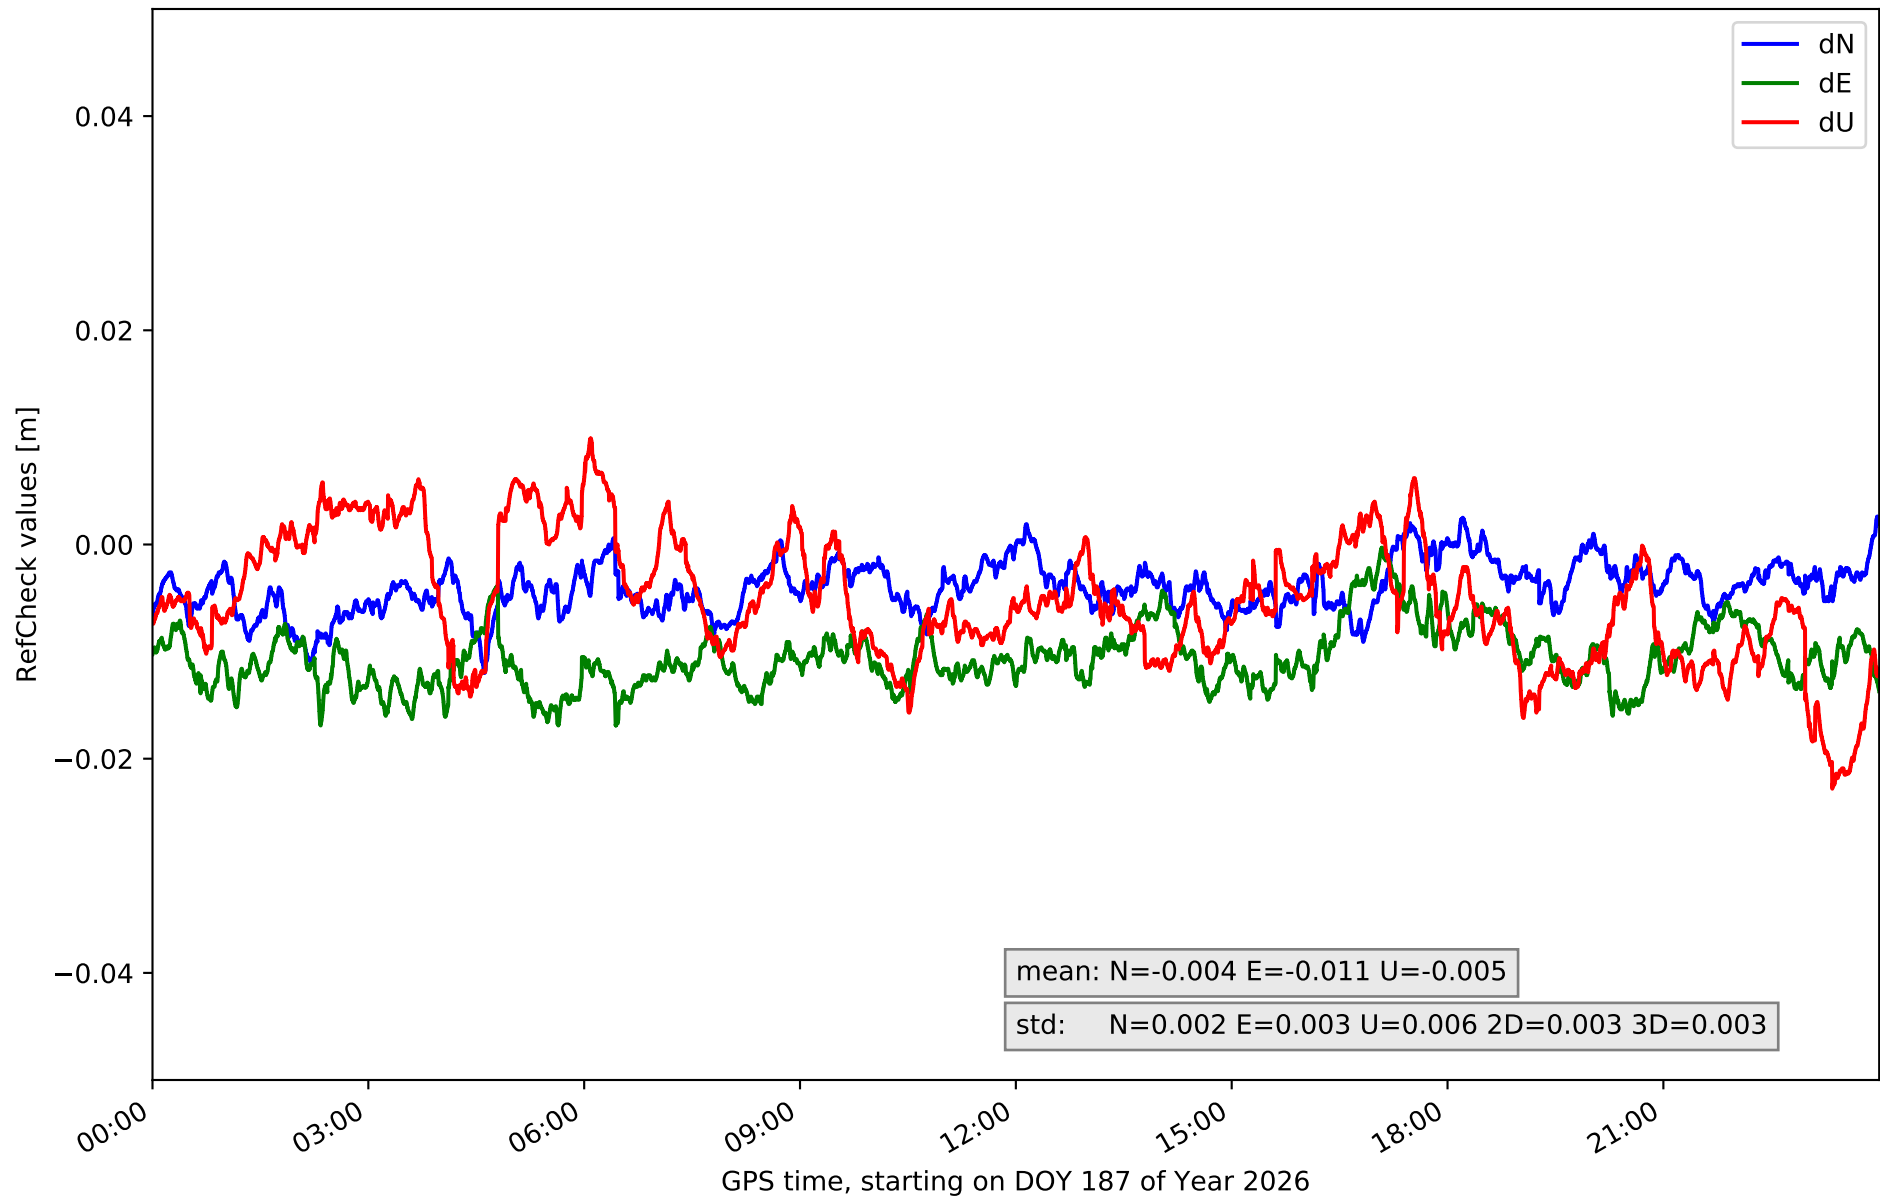


RefCheck for station GOME in network N32T

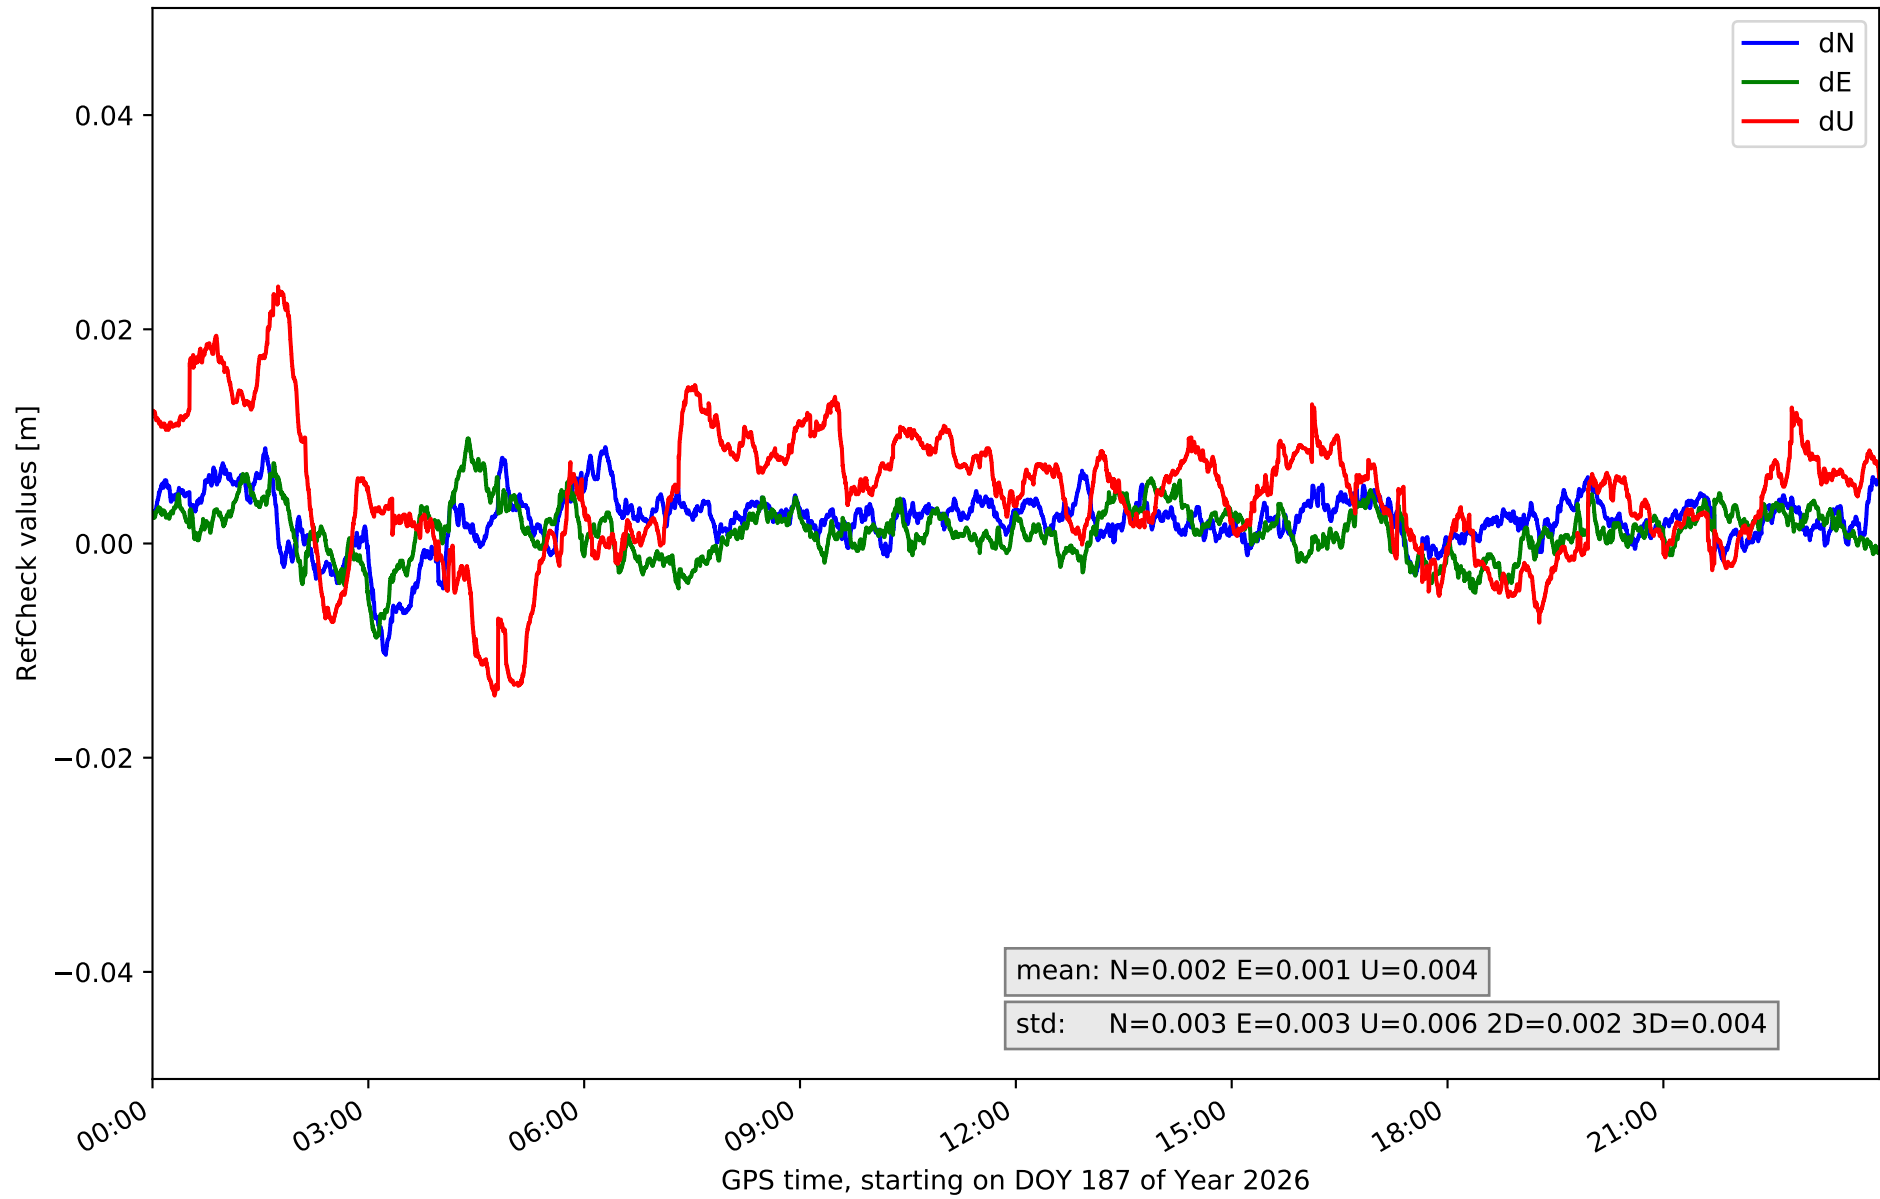


RefCheck for station IZAN in network N32T

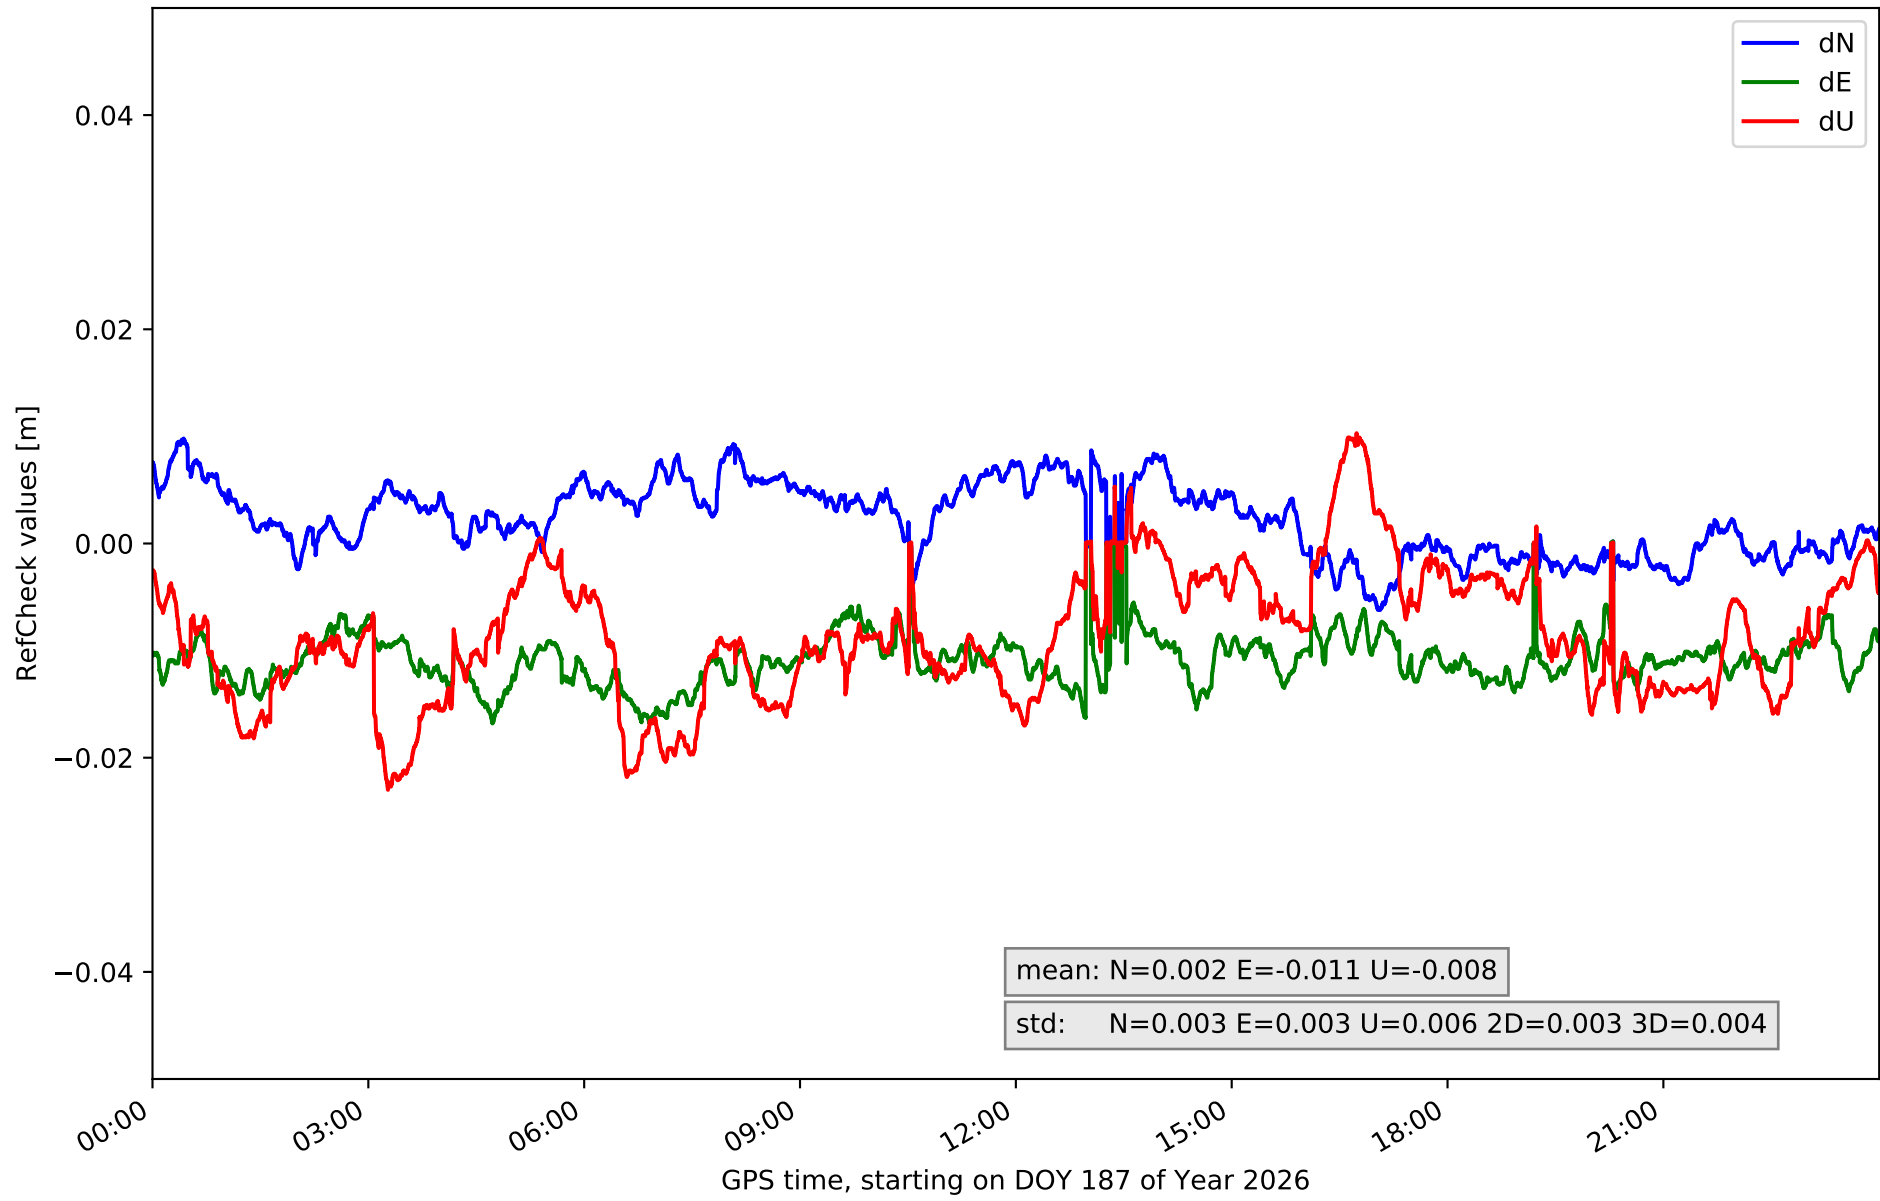


RefCheck for station LP01 in network N32T

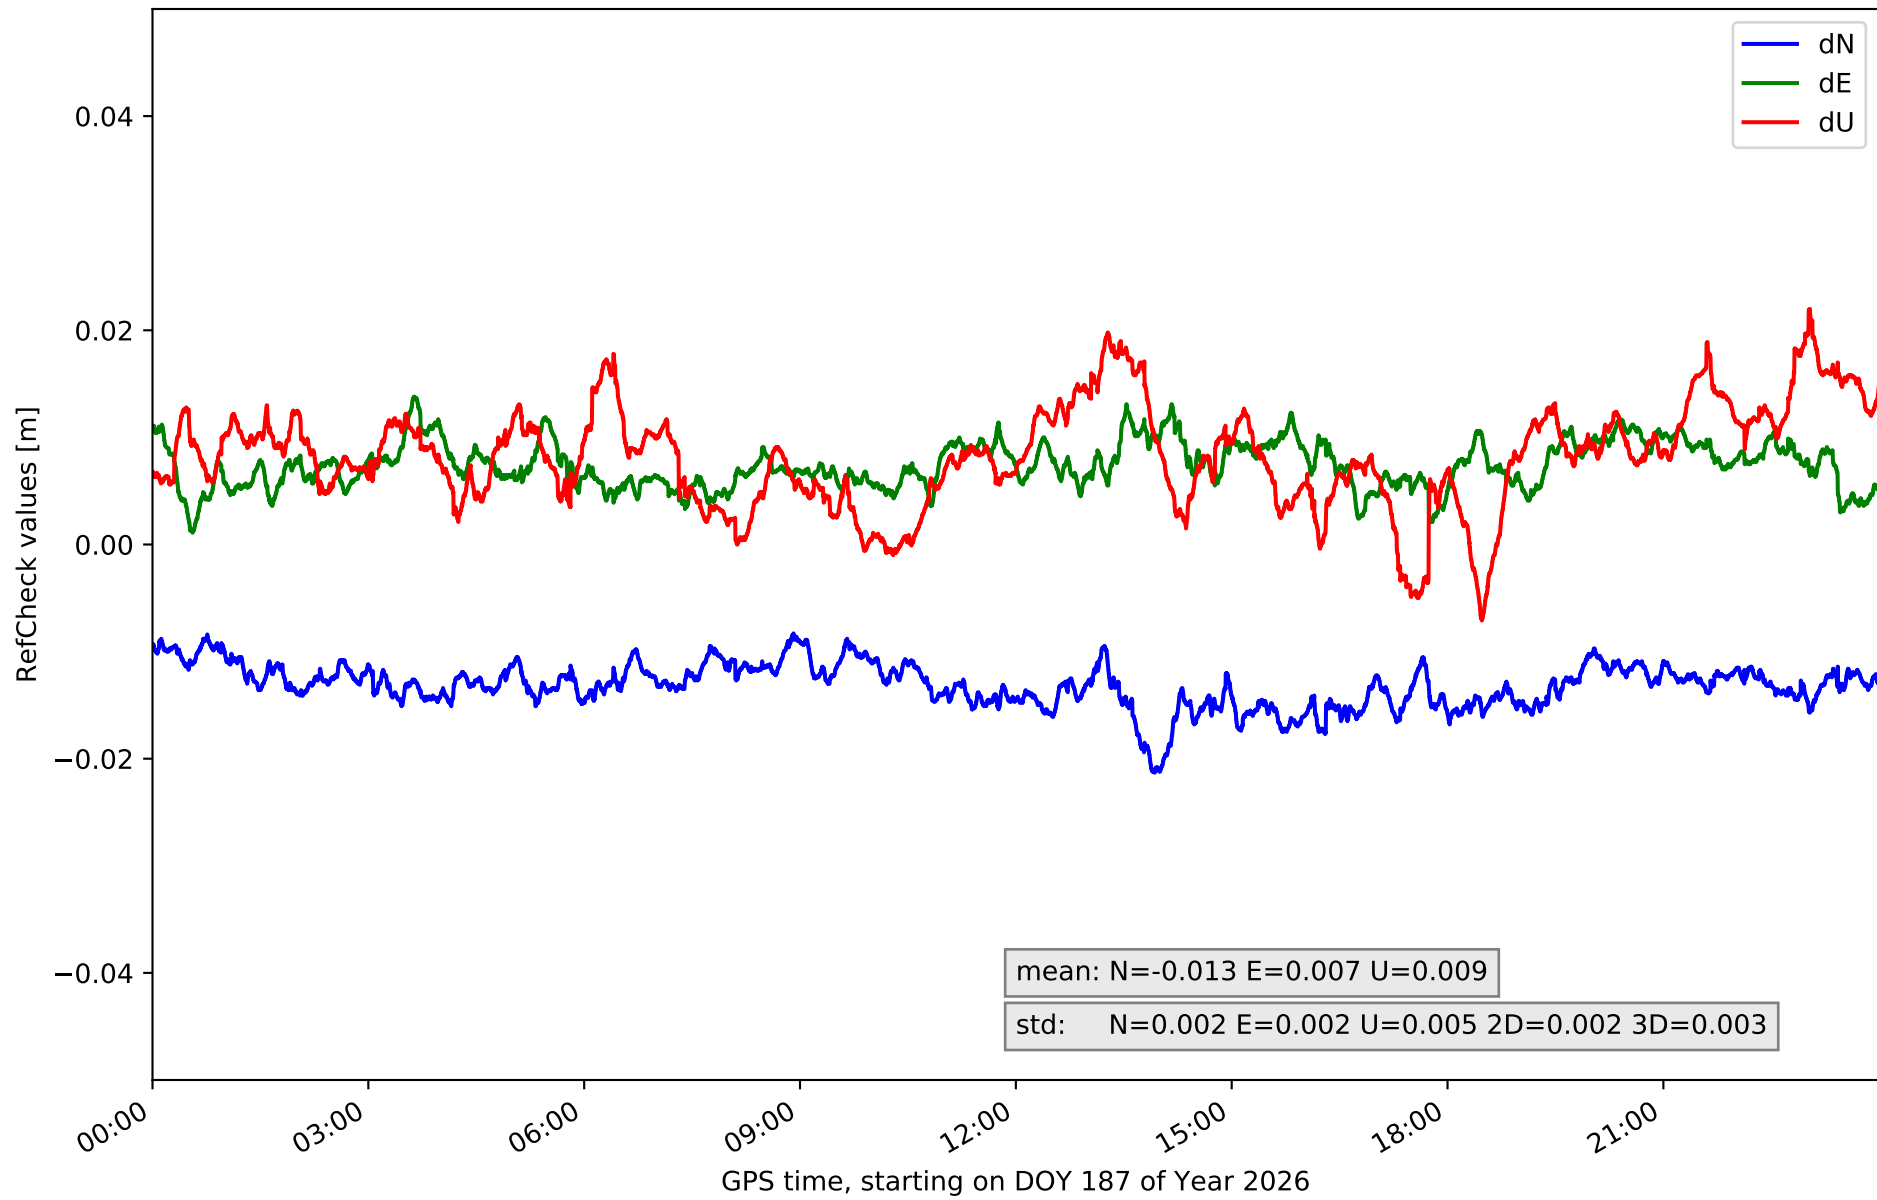


RefCheck for station LP03 in network N32T

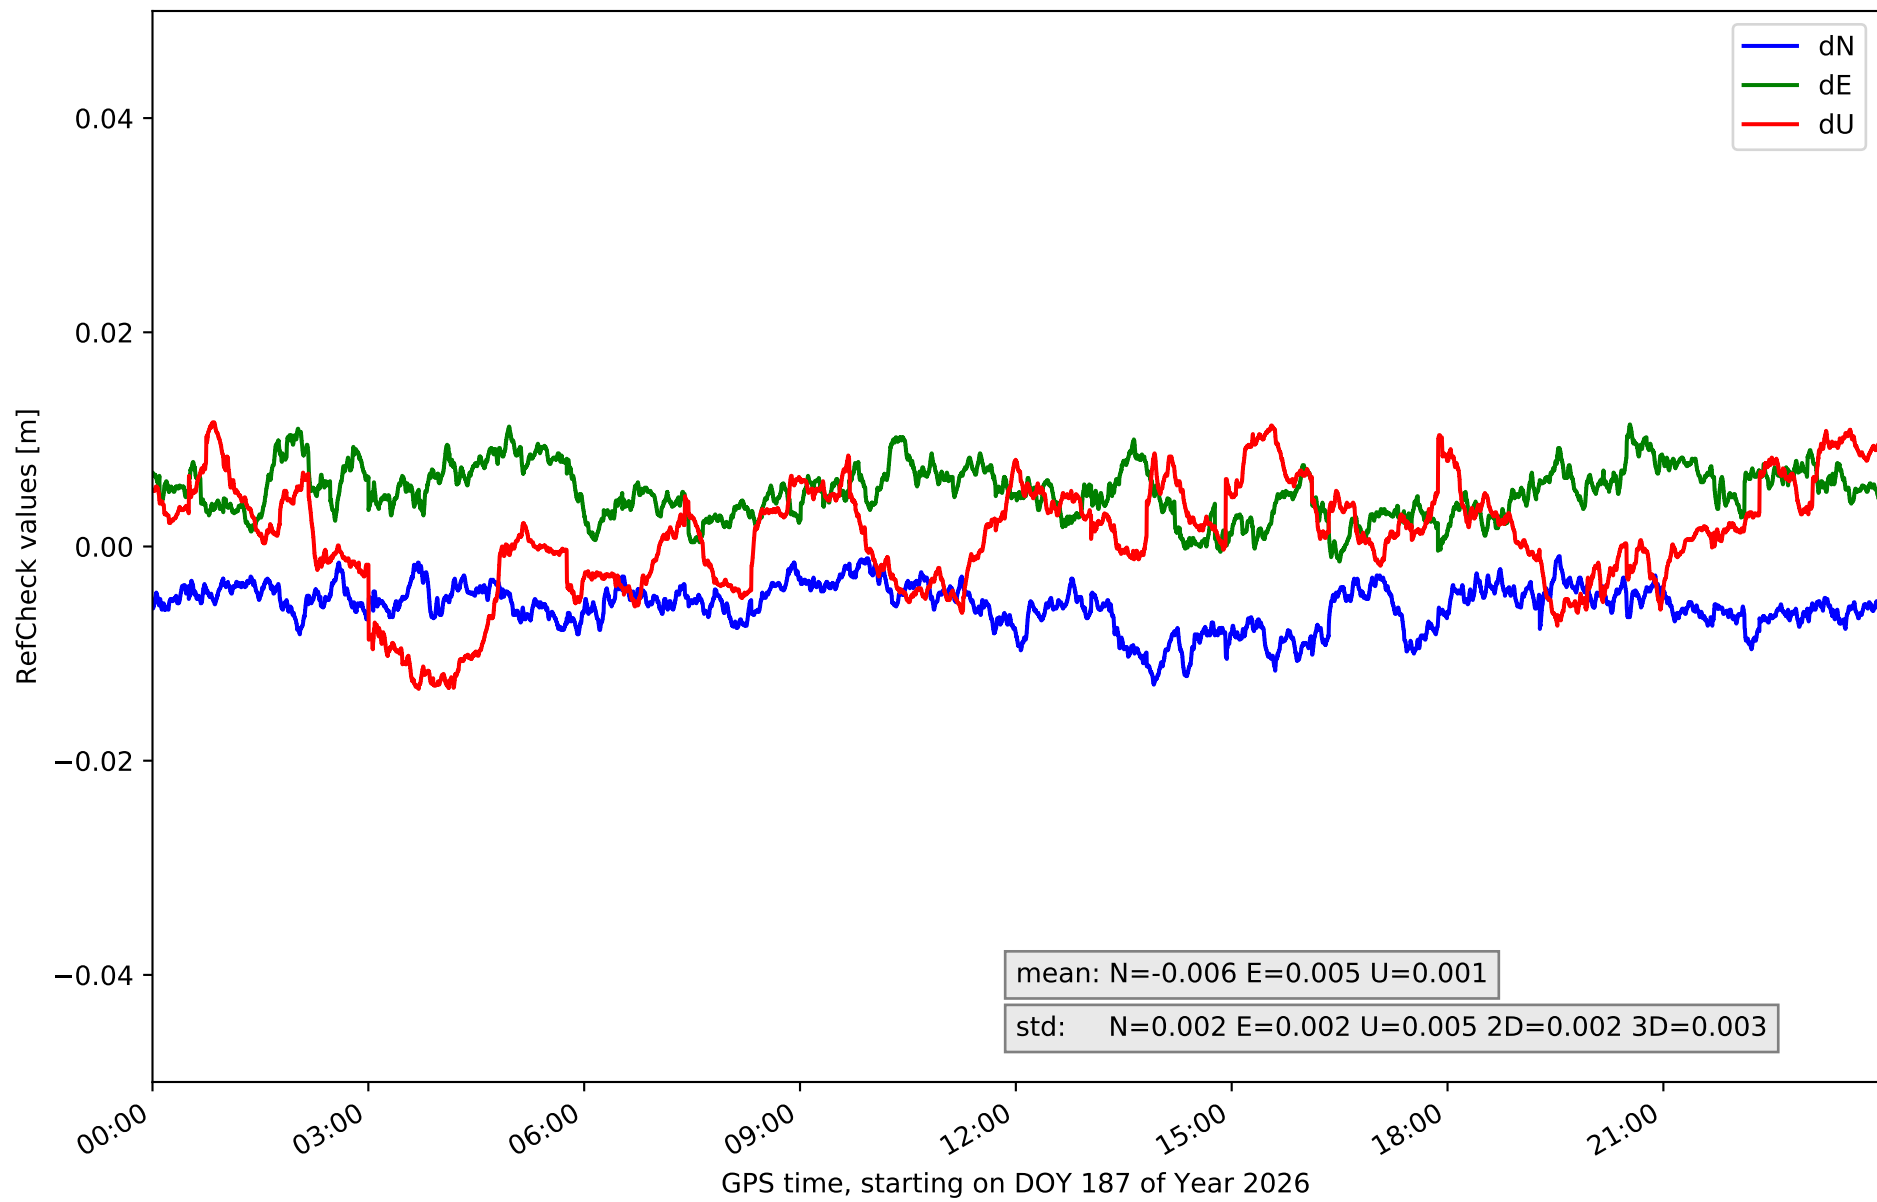


RefCheck for station LPAL in network N32T

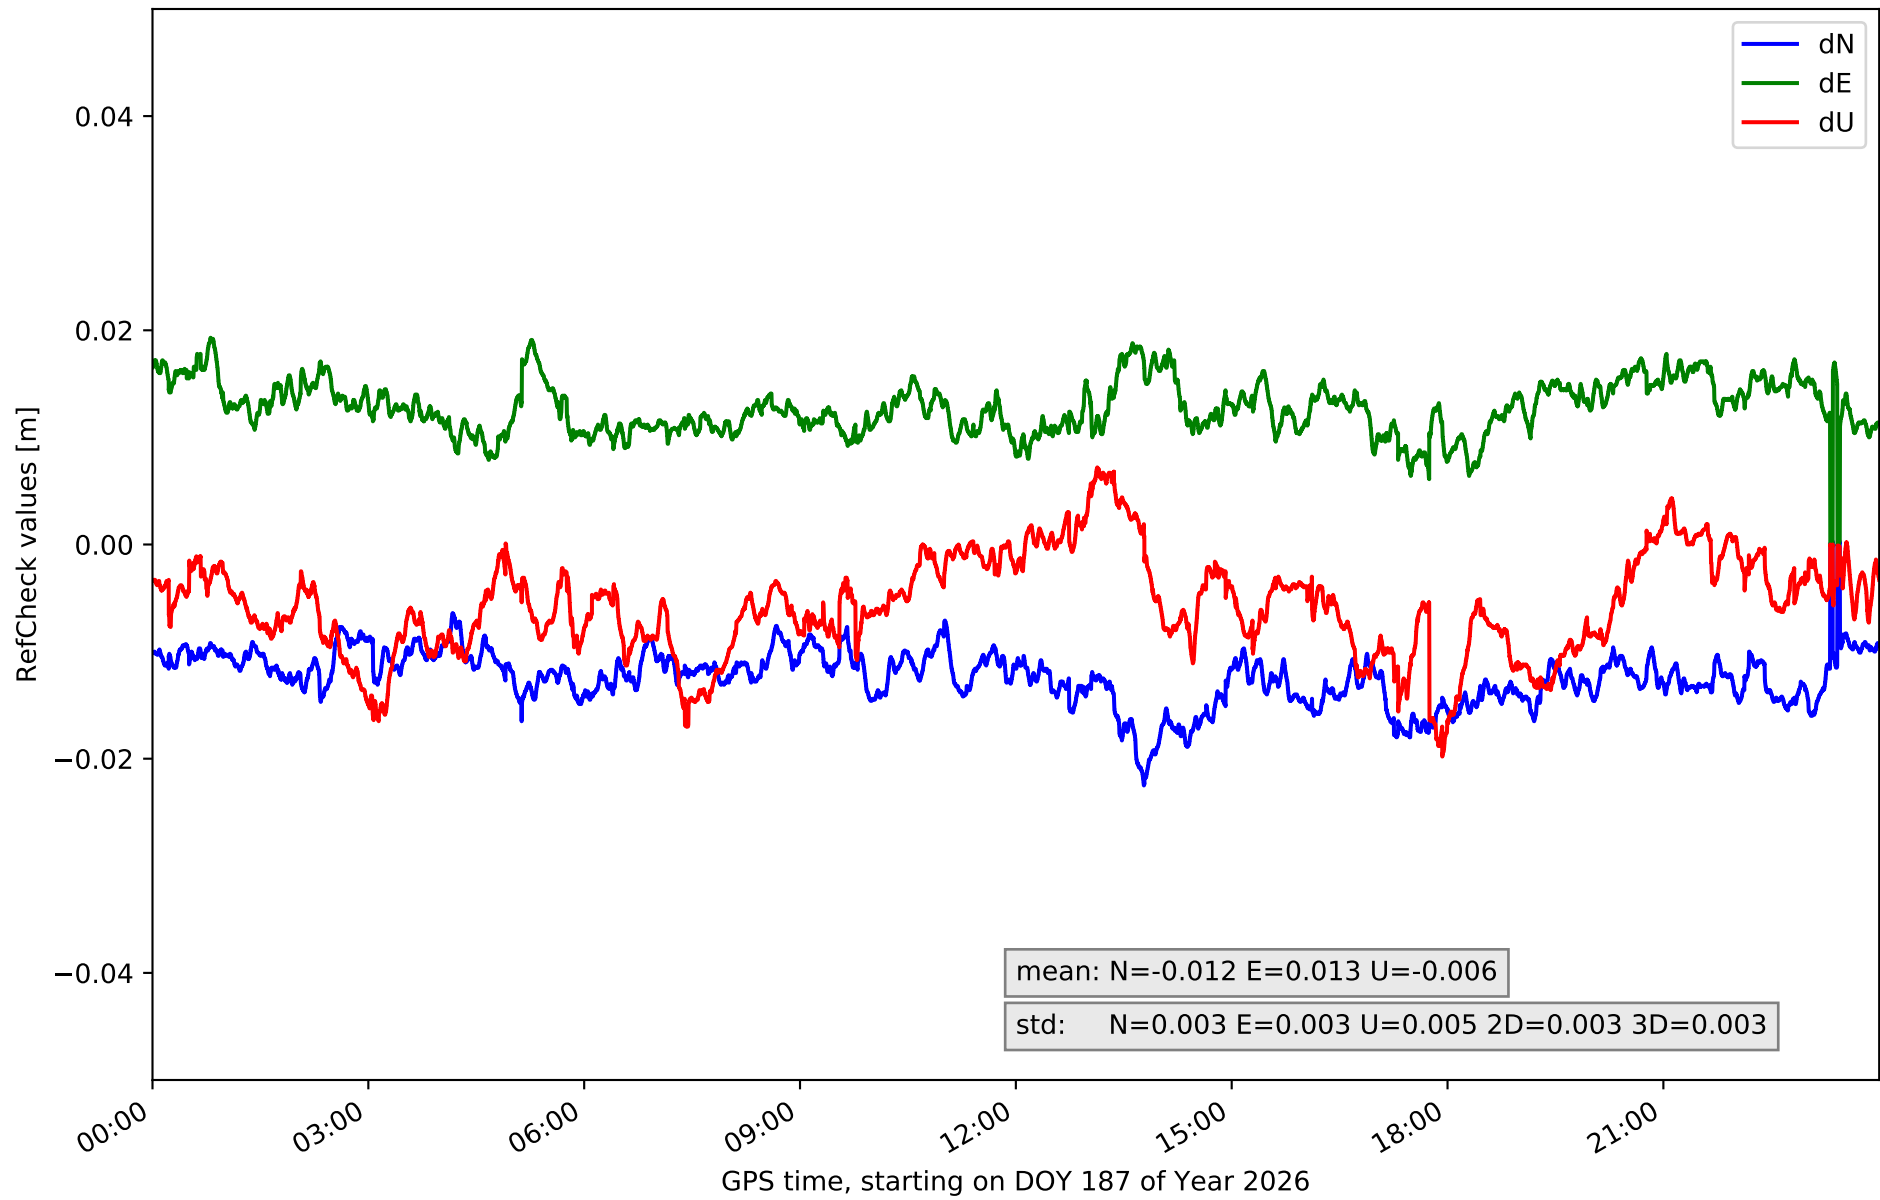


RefCheck for station LRES in network N32T

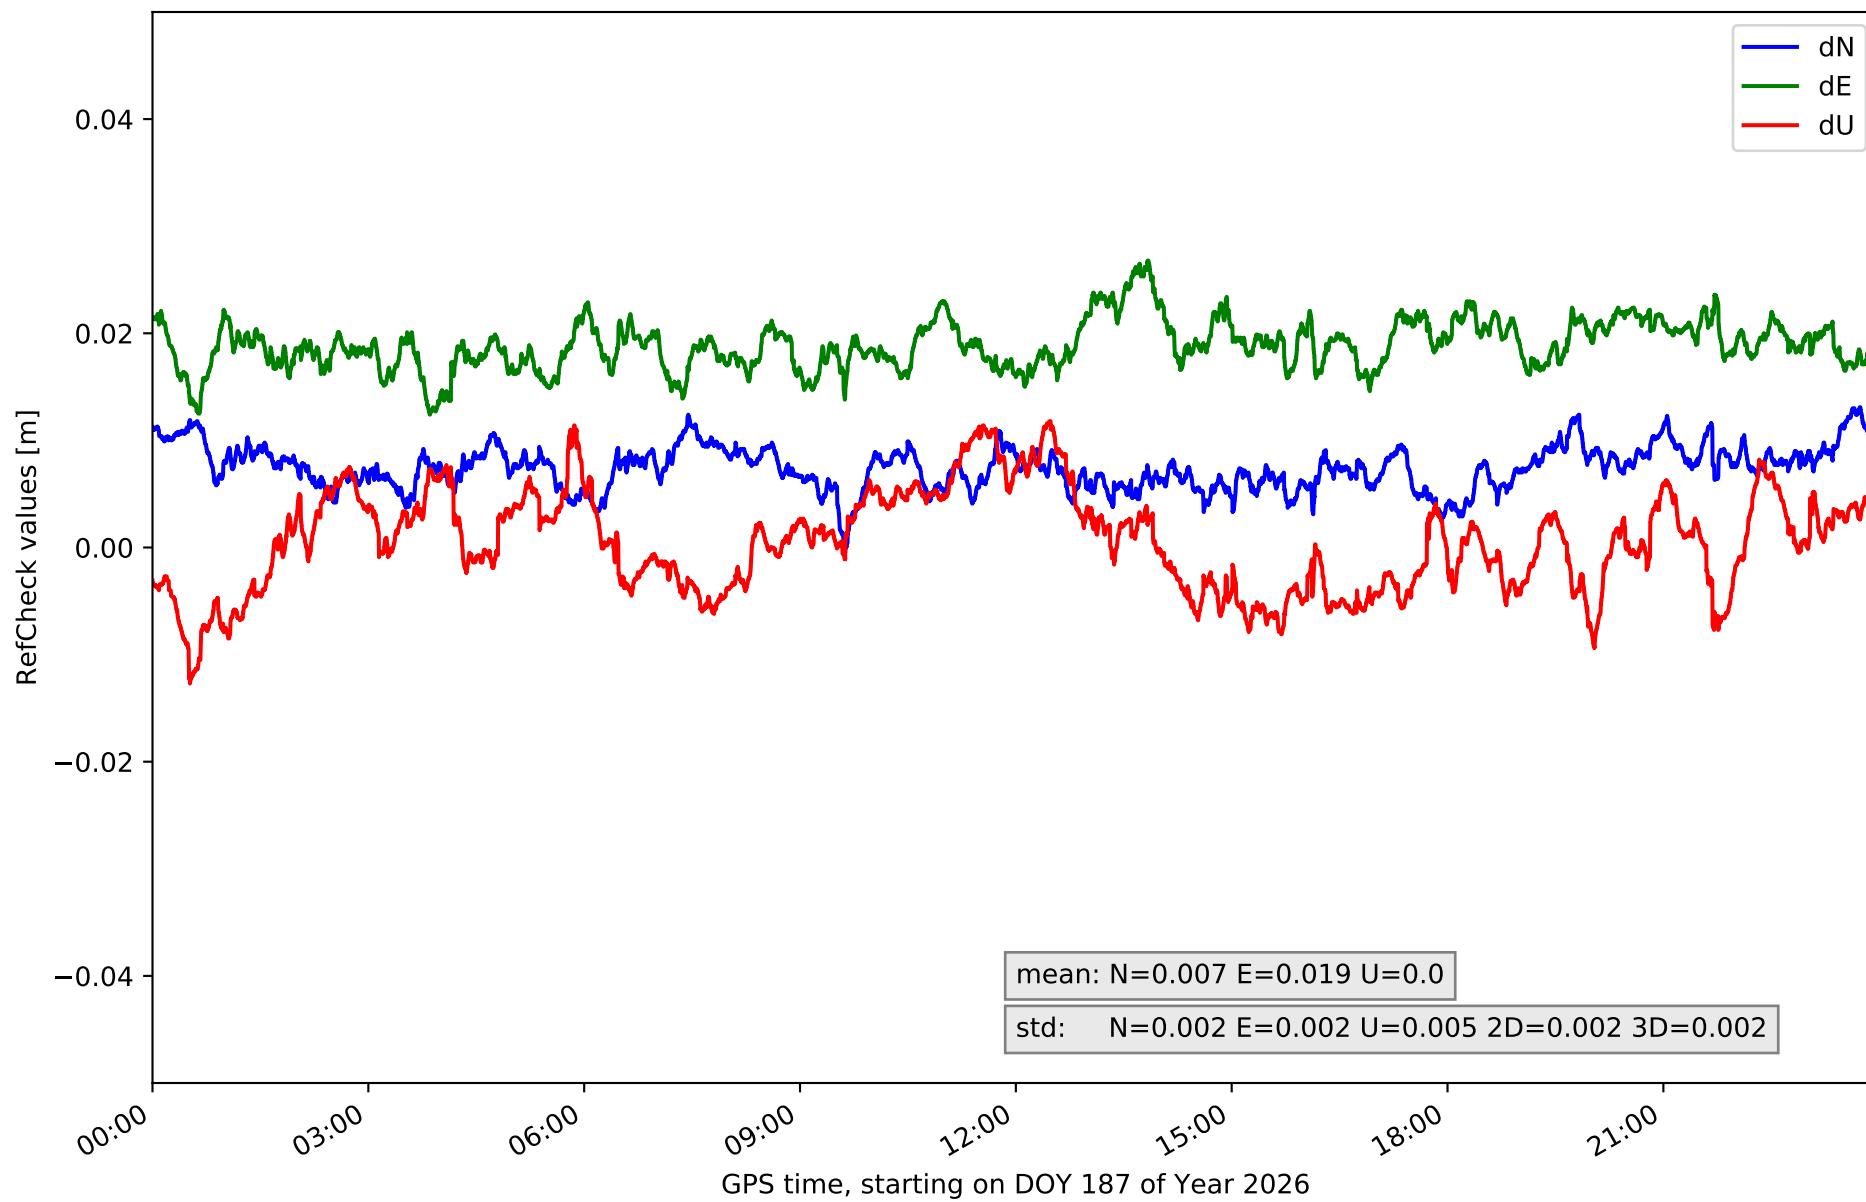


RefCheck for station TN01 in network N32T

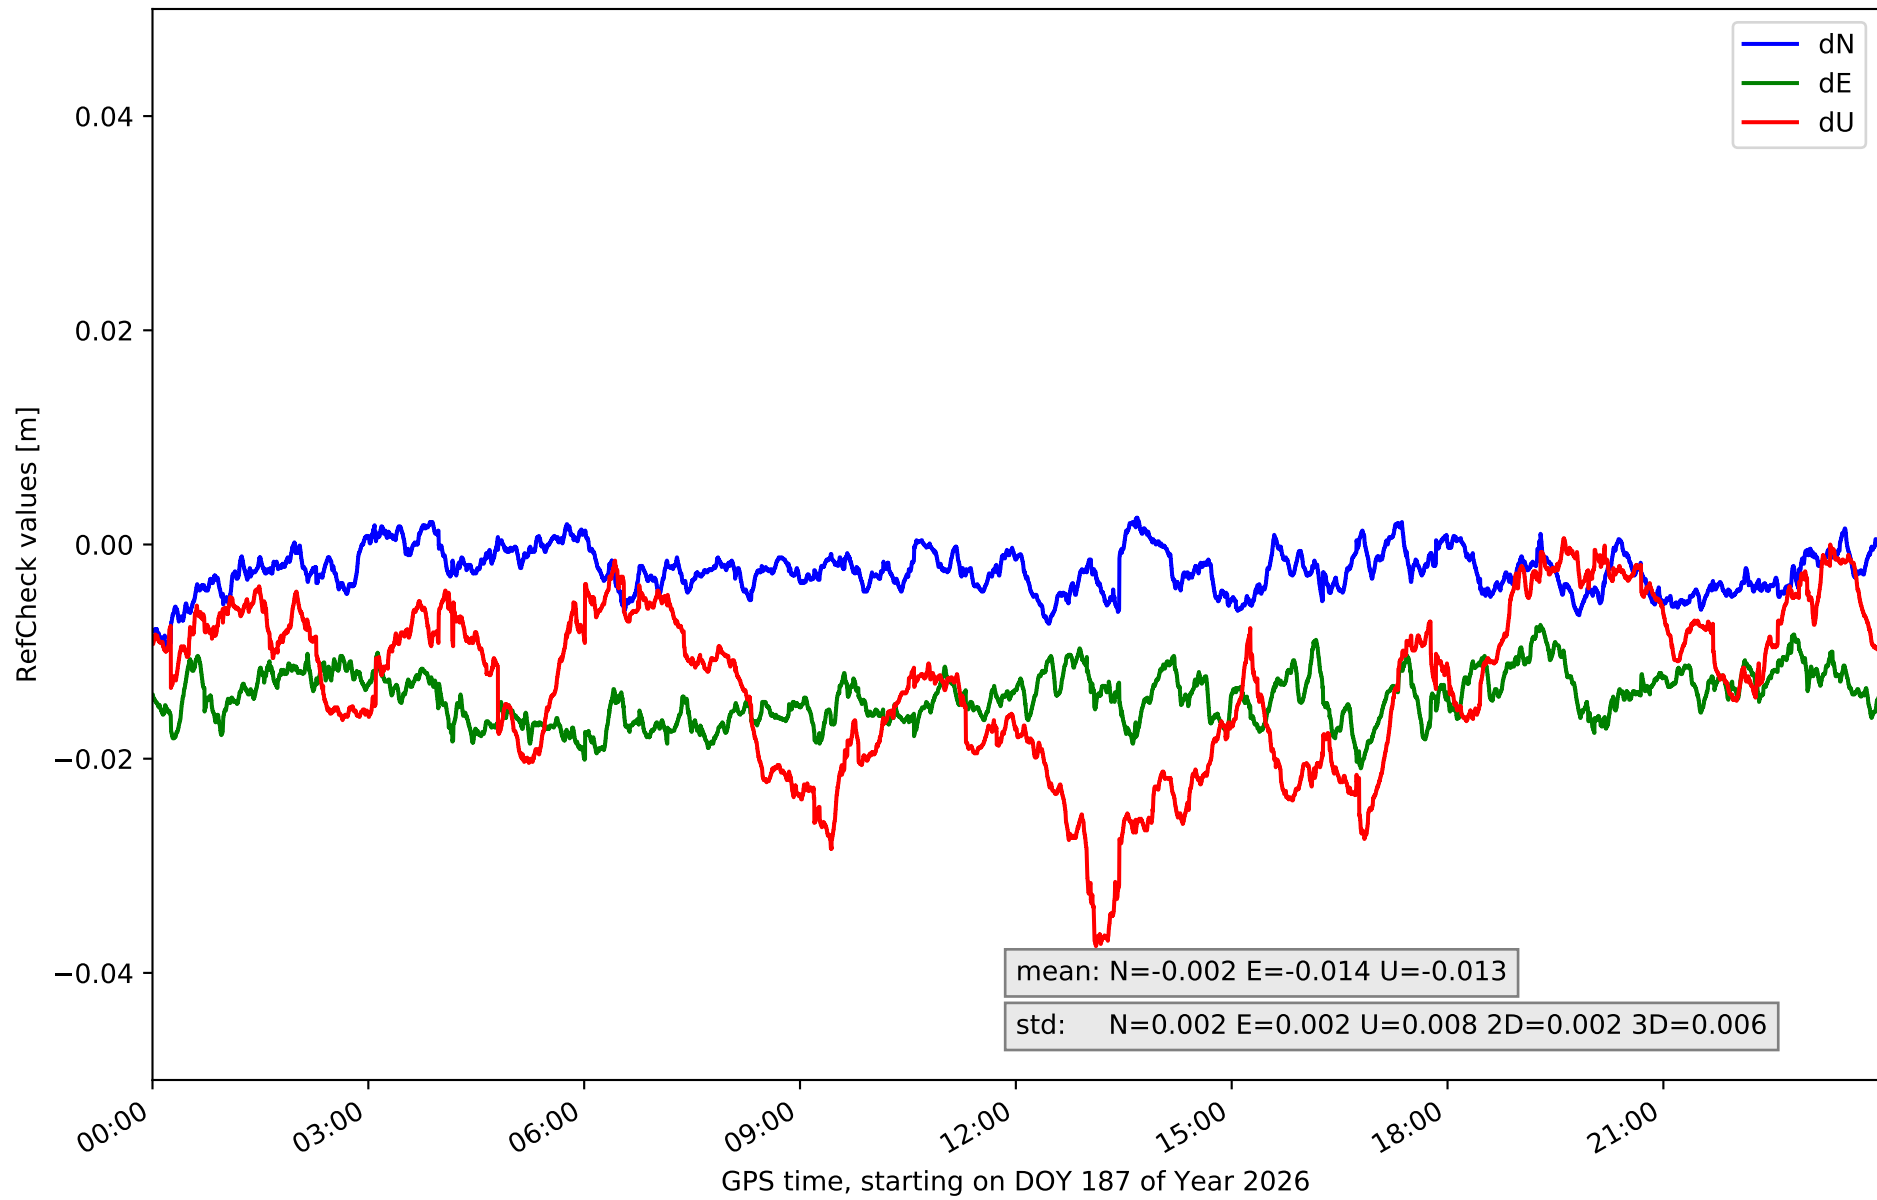


RefCheck for station TN02 in network N32T

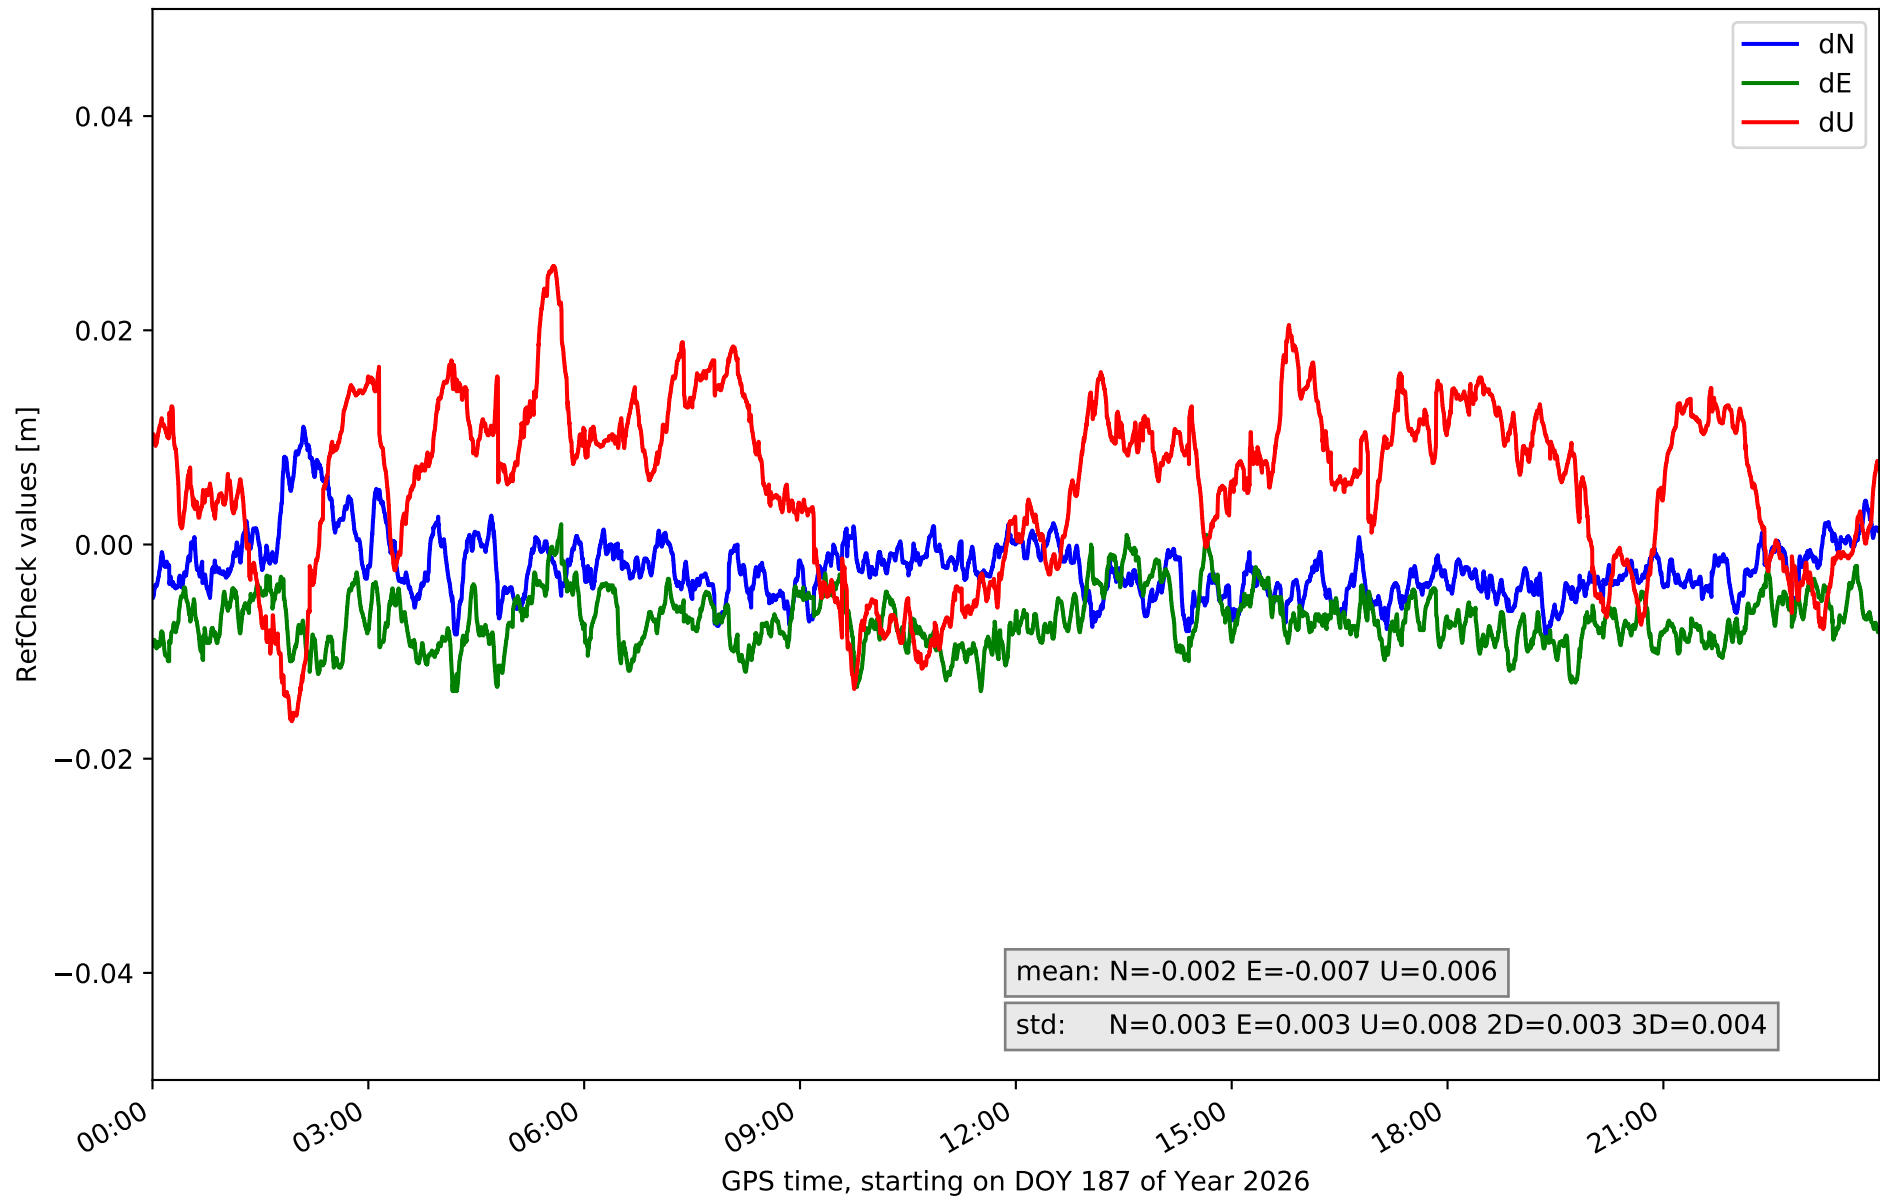


RefCheck for station TN03 in network N32T

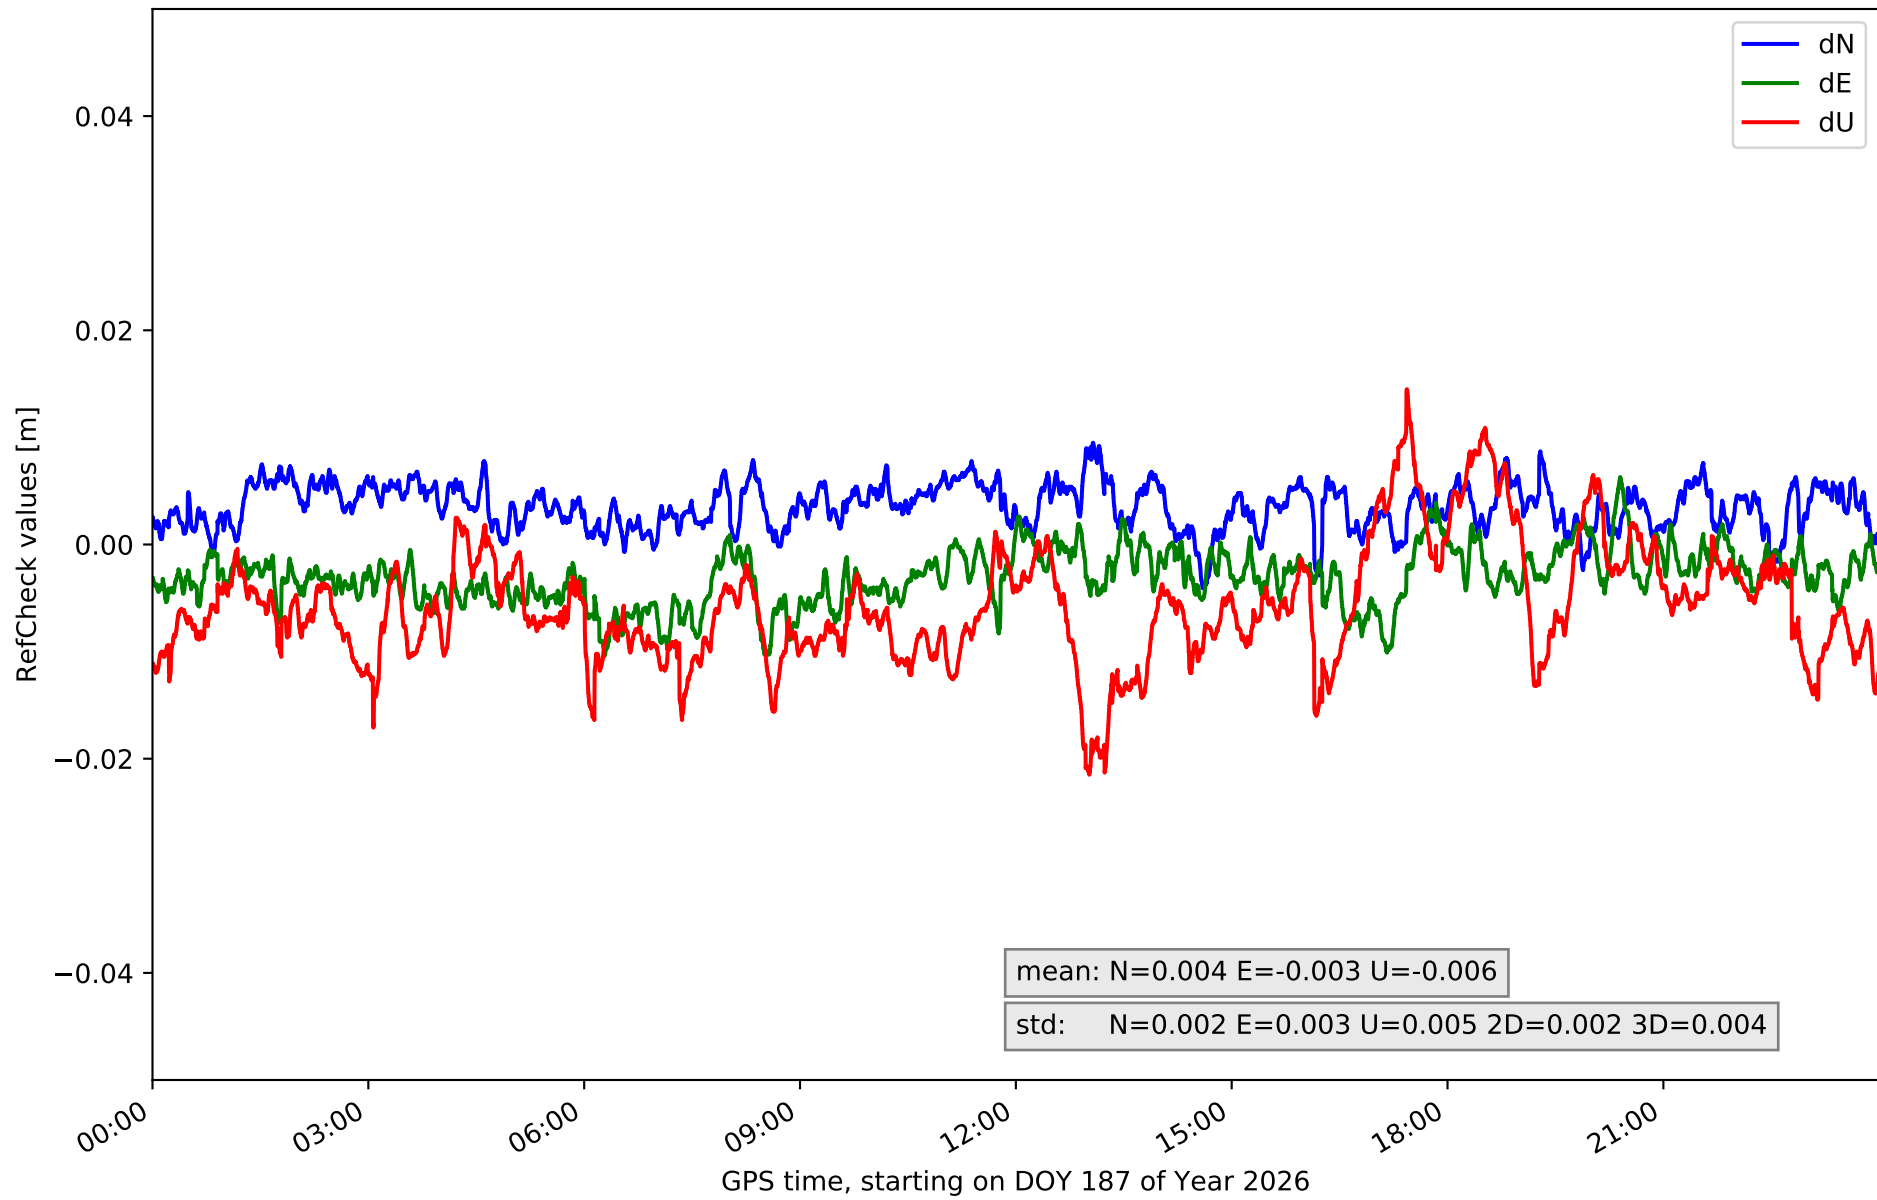


RefCheck for station TN06 in network N32T

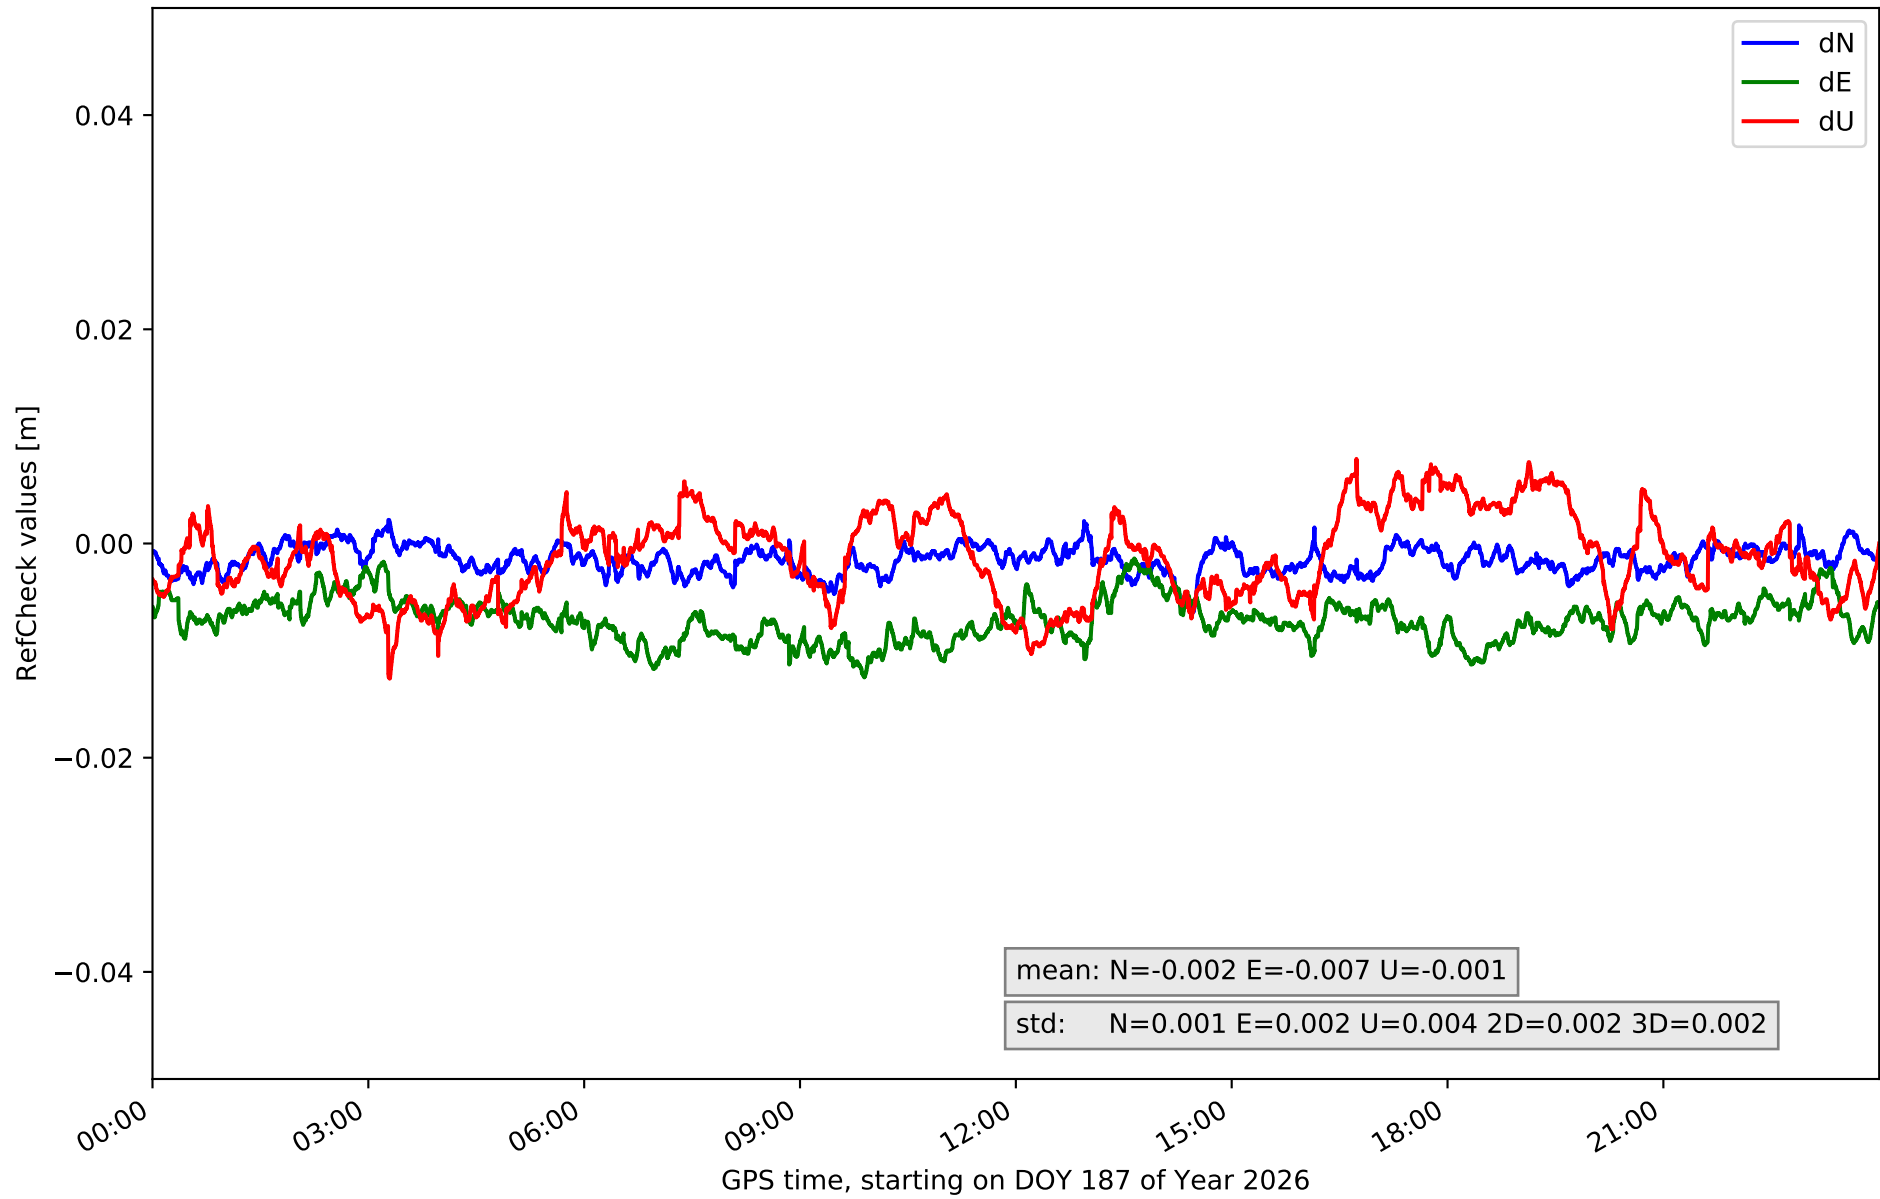

RefCheck for station TN09 in network N32T

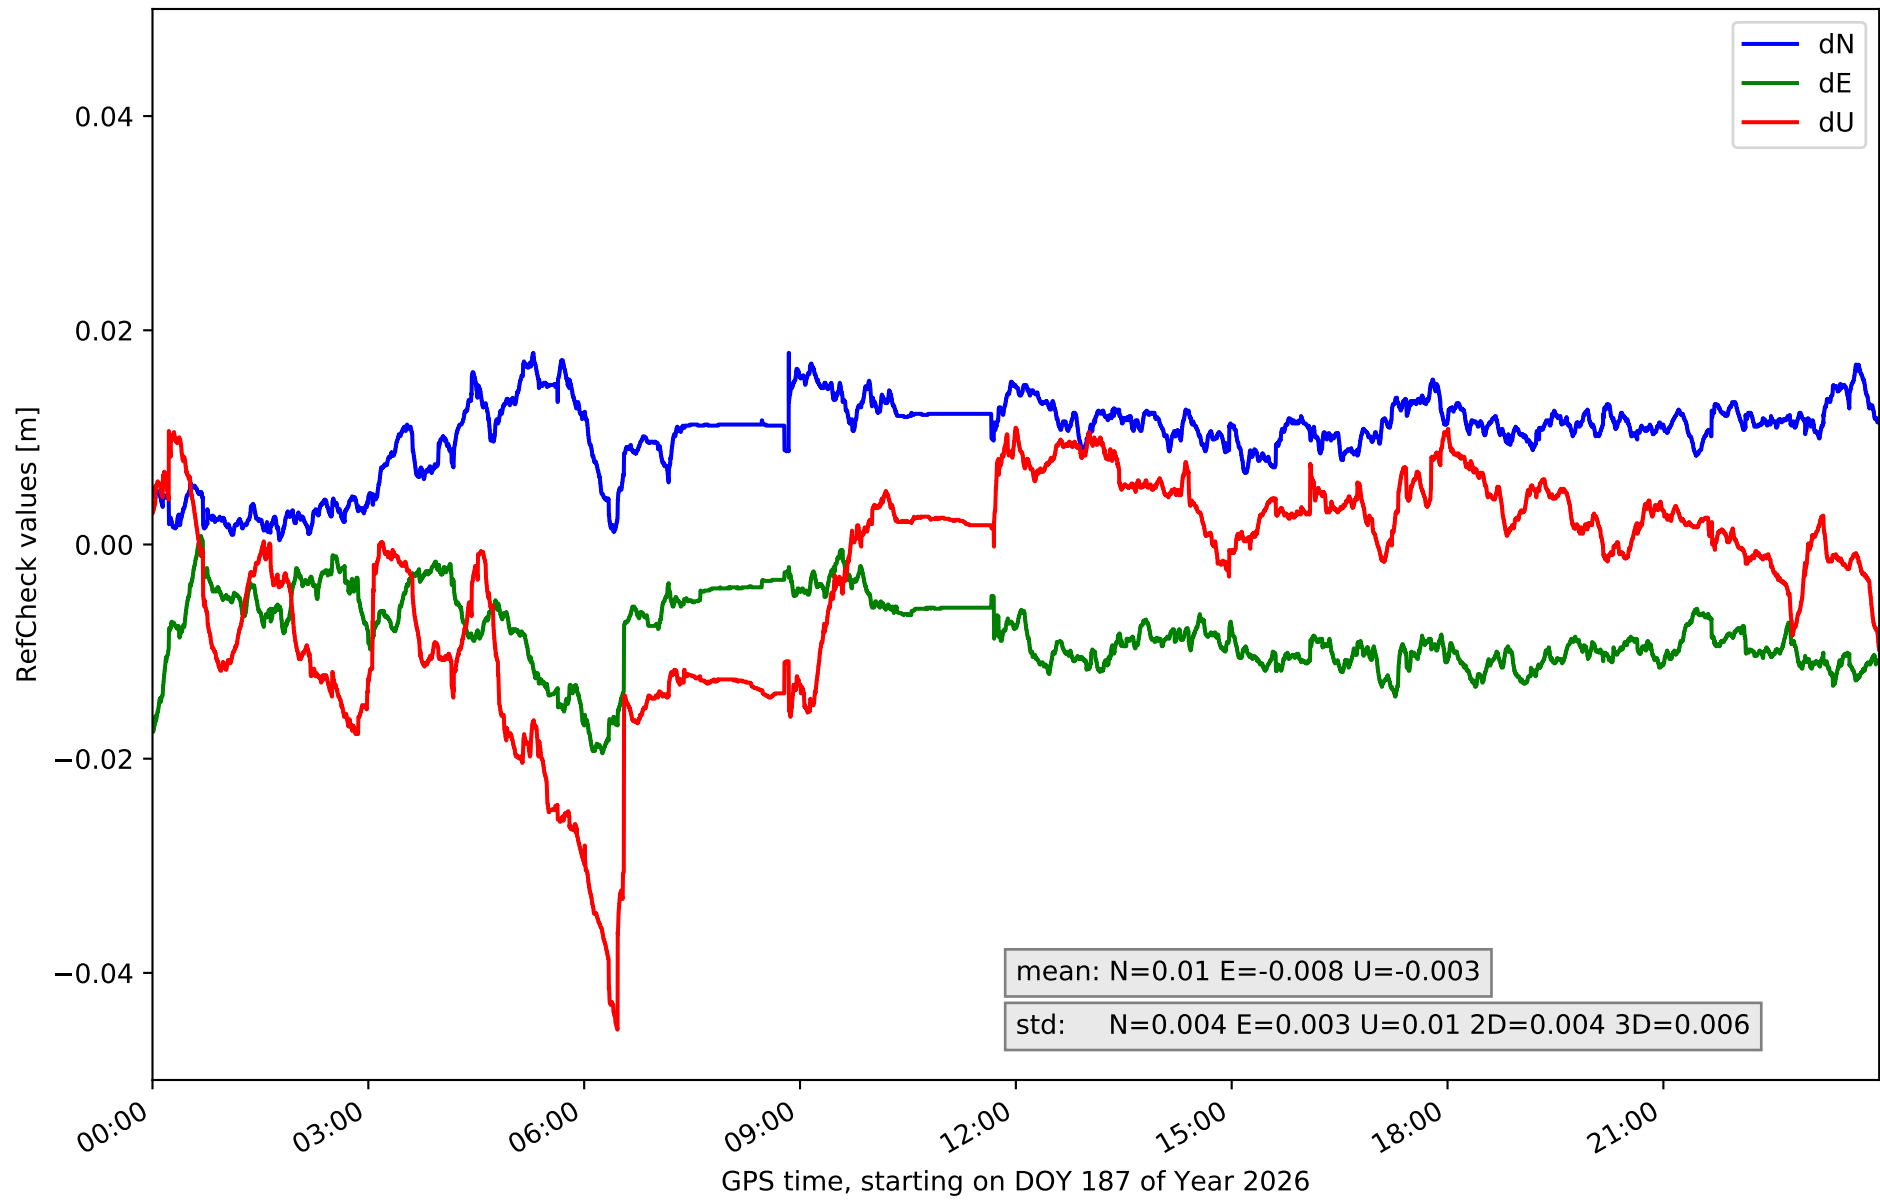

RefCheck for station TE11 in network N32T

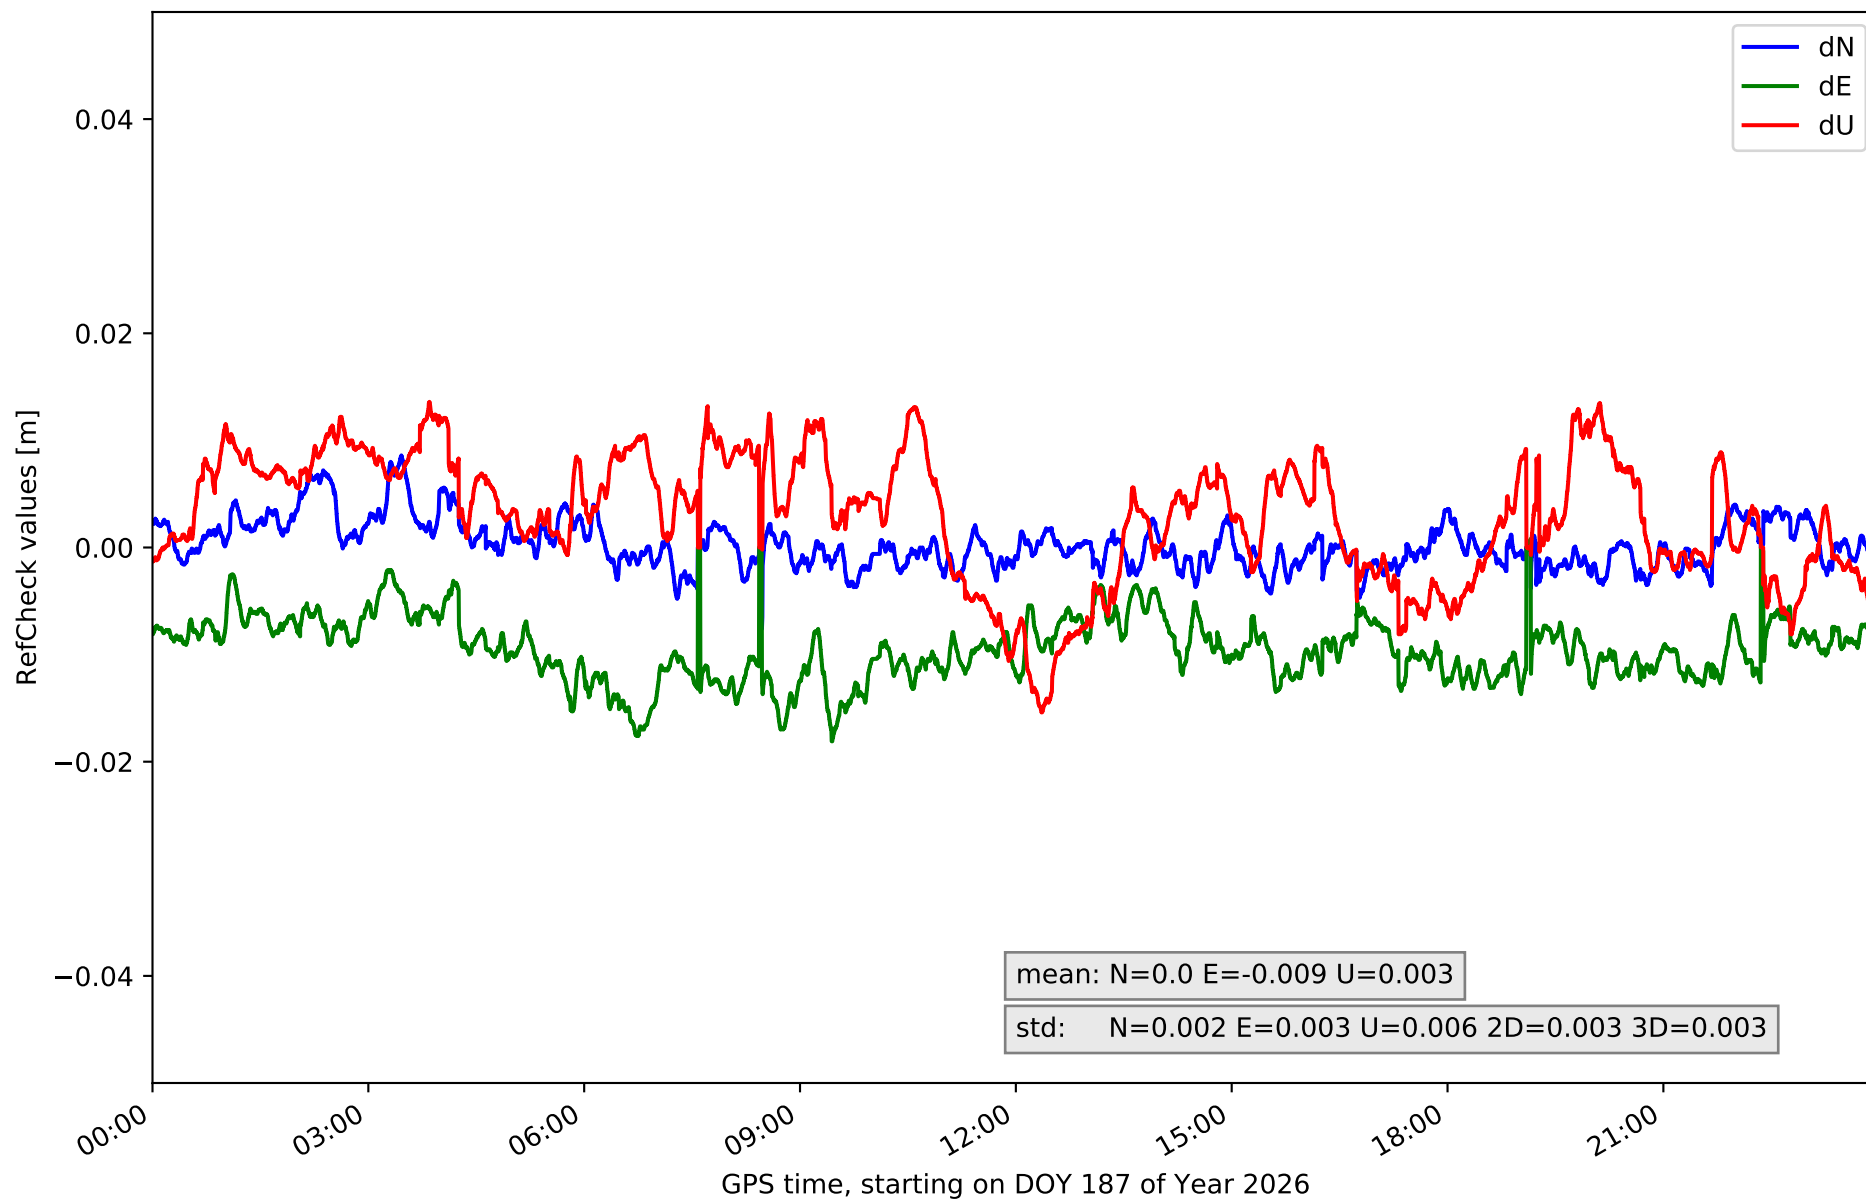

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.005	0.009	0.002	0.0	0.03	0.003	-0.003	0.036	0.007	0.003	0.005	72697	99.5	54008	73.9
EH02	-0.001	0.014	0.003	-0.0	0.028	0.002	-0.011	0.022	0.007	0.002	0.003	72821	99.7	71465	97.8
GOM1	-0.012	0.003	0.002	-0.017	-0.0	0.003	-0.023	0.01	0.006	0.003	0.003	53605	73.4	2370	3.2
GOME	-0.01	0.009	0.003	-0.009	0.01	0.003	-0.014	0.024	0.006	0.002	0.004	736	1.0	1279	1.8
IZAN	-0.006	0.01	0.003	-0.017	0.0	0.003	-0.023	0.01	0.006	0.003	0.004	55727	76.3	8078	11.1
LP01	-0.021	-0.008	0.002	0.001	0.014	0.002	-0.007	0.022	0.005	0.002	0.003	72901	99.8	17232	23.6
LP03	-0.013	-0.001	0.002	-0.001	0.011	0.002	-0.013	0.012	0.005	0.002	0.003	12853	17.6	0	0.0
LPAL	-0.022	0.0	0.003	-0.0	0.019	0.003	-0.02	0.007	0.005	0.003	0.003	72818	99.7	28625	39.2
LRES	-0.001	0.013	0.002	0.012	0.027	0.002	-0.013	0.012	0.005	0.002	0.002	73064	100.0	49906	68.3
TN01	-0.009	0.003	0.002	-0.021	-0.007	0.002	-0.037	0.001	0.008	0.002	0.006	71342	97.6	33547	45.9
TN02	-0.009	0.011	0.003	-0.014	0.002	0.003	-0.017	0.026	0.008	0.003	0.004	14485	19.8	2215	3.0
TN03	-0.004	0.009	0.002	-0.01	0.006	0.003	-0.021	0.015	0.005	0.002	0.004	688	0.9	1060	1.5
TN06	-0.006	0.002	0.001	-0.013	-0.001	0.002	-0.013	0.008	0.004	0.002	0.002	6863	9.4	0	0.0
TN09	0.0	0.018	0.004	-0.019	0.001	0.003	-0.045	0.011	0.01	0.004	0.006	61641	84.4	7127	9.8
TE11	-0.008	0.009	0.002	-0.018	0.001	0.003	-0.015	0.014	0.006	0.003	0.003	31385	43.0	182	0.2
Mean	-0.008	0.007	0.002	-0.008	0.009	0.003	-0.018	0.015	0.006	0.003	0.004	44908.4	61.5	18472.9	25.3
Min/Max	-0.022	0.018	0.004	-0.021	0.03	0.003	-0.045	0.036	0.01	0.004	0.006	73064	100.0	71465	97.8

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	95.4	95.3	94.7	95.7	95.4
considering satellites with dual-frequency fixed	94.1	94.0	93.3	94.7	94.2
considering all signals separately	94.2	94.0	93.4	95.0	93.8