

summary for network N32T

timeperiod chosen: from 2026-07-09-00:00:00 until 2026-07-09-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.5 seconds


average fixing percentage with threshold set to 0.3: 94.7 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

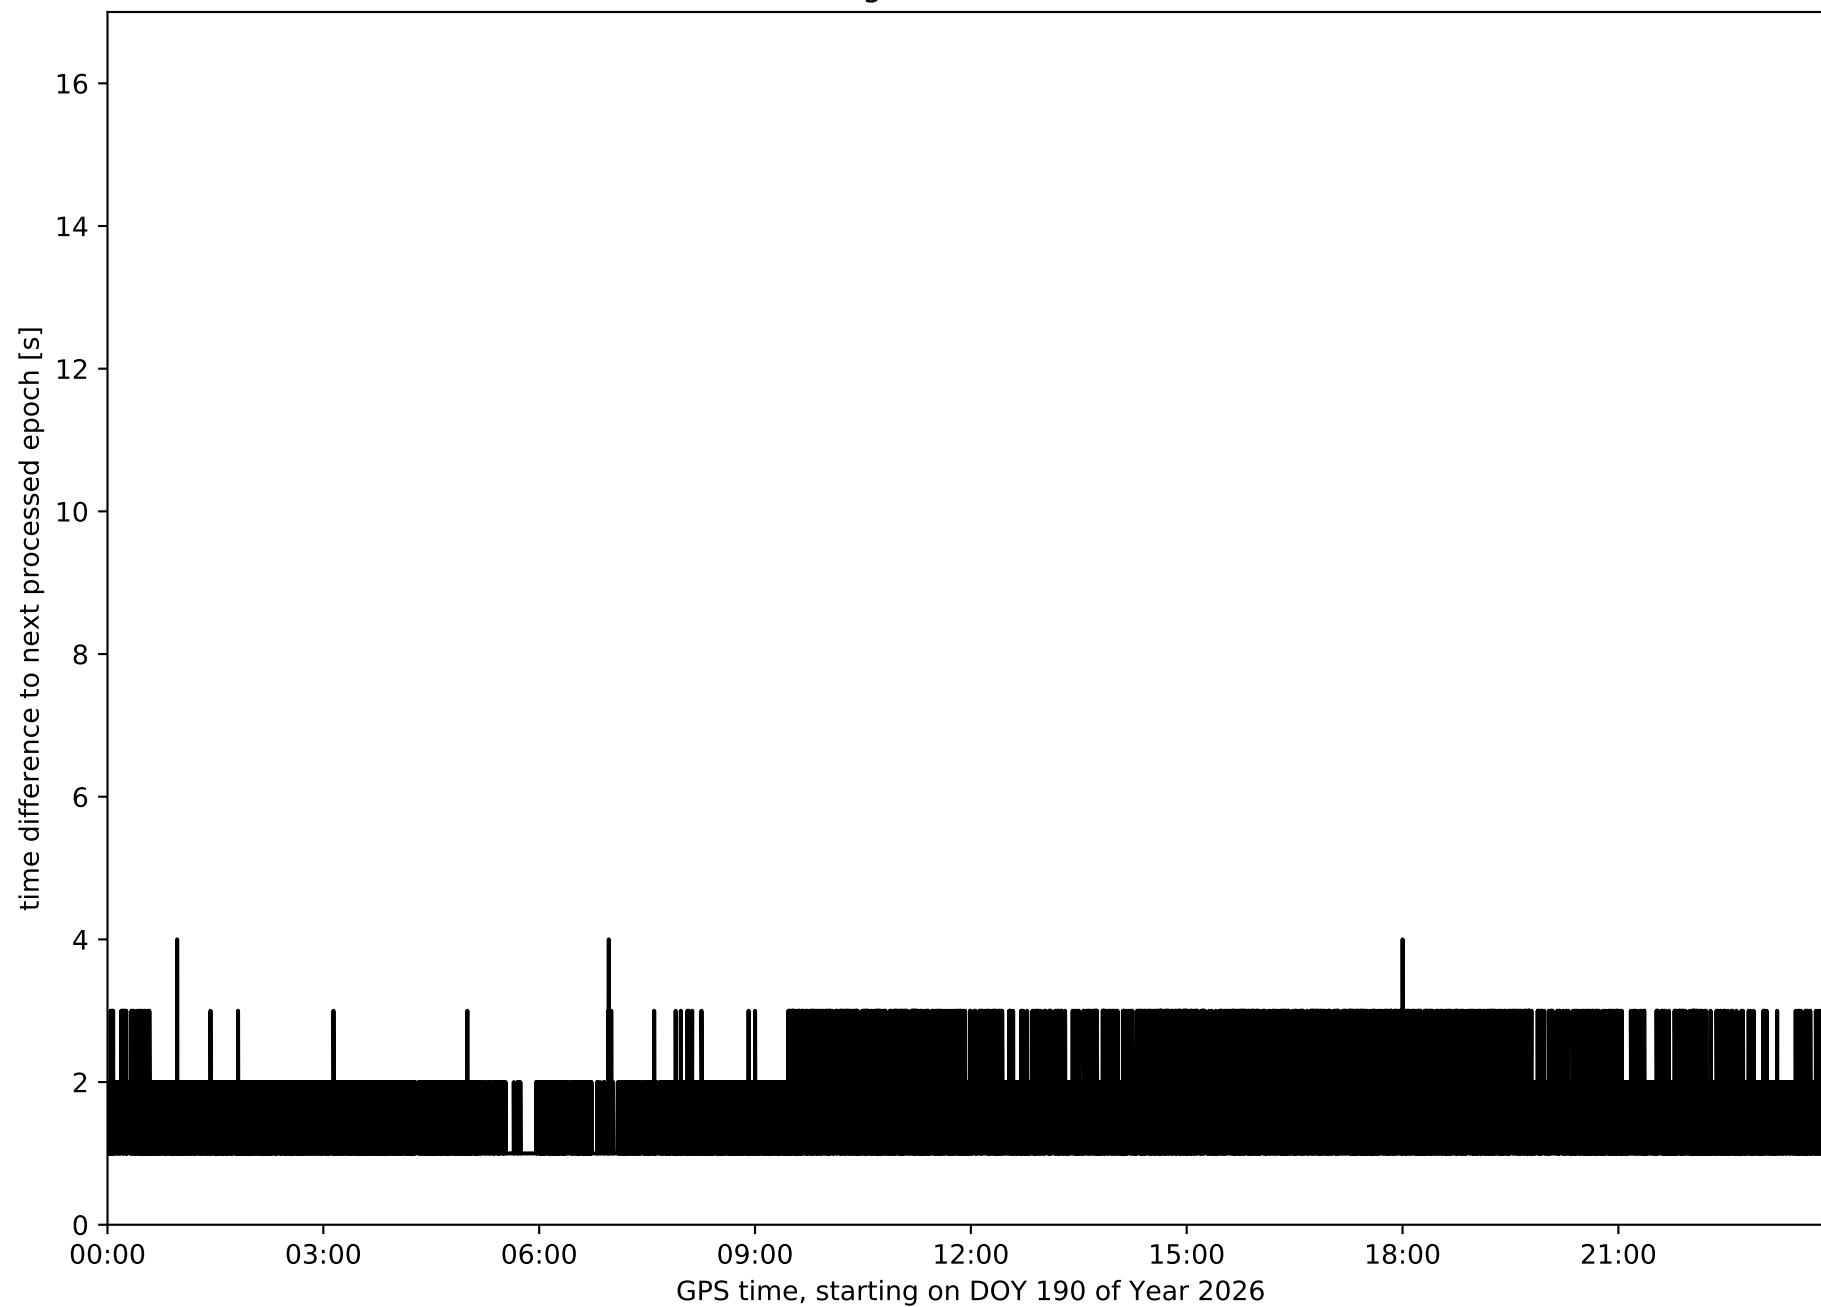


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

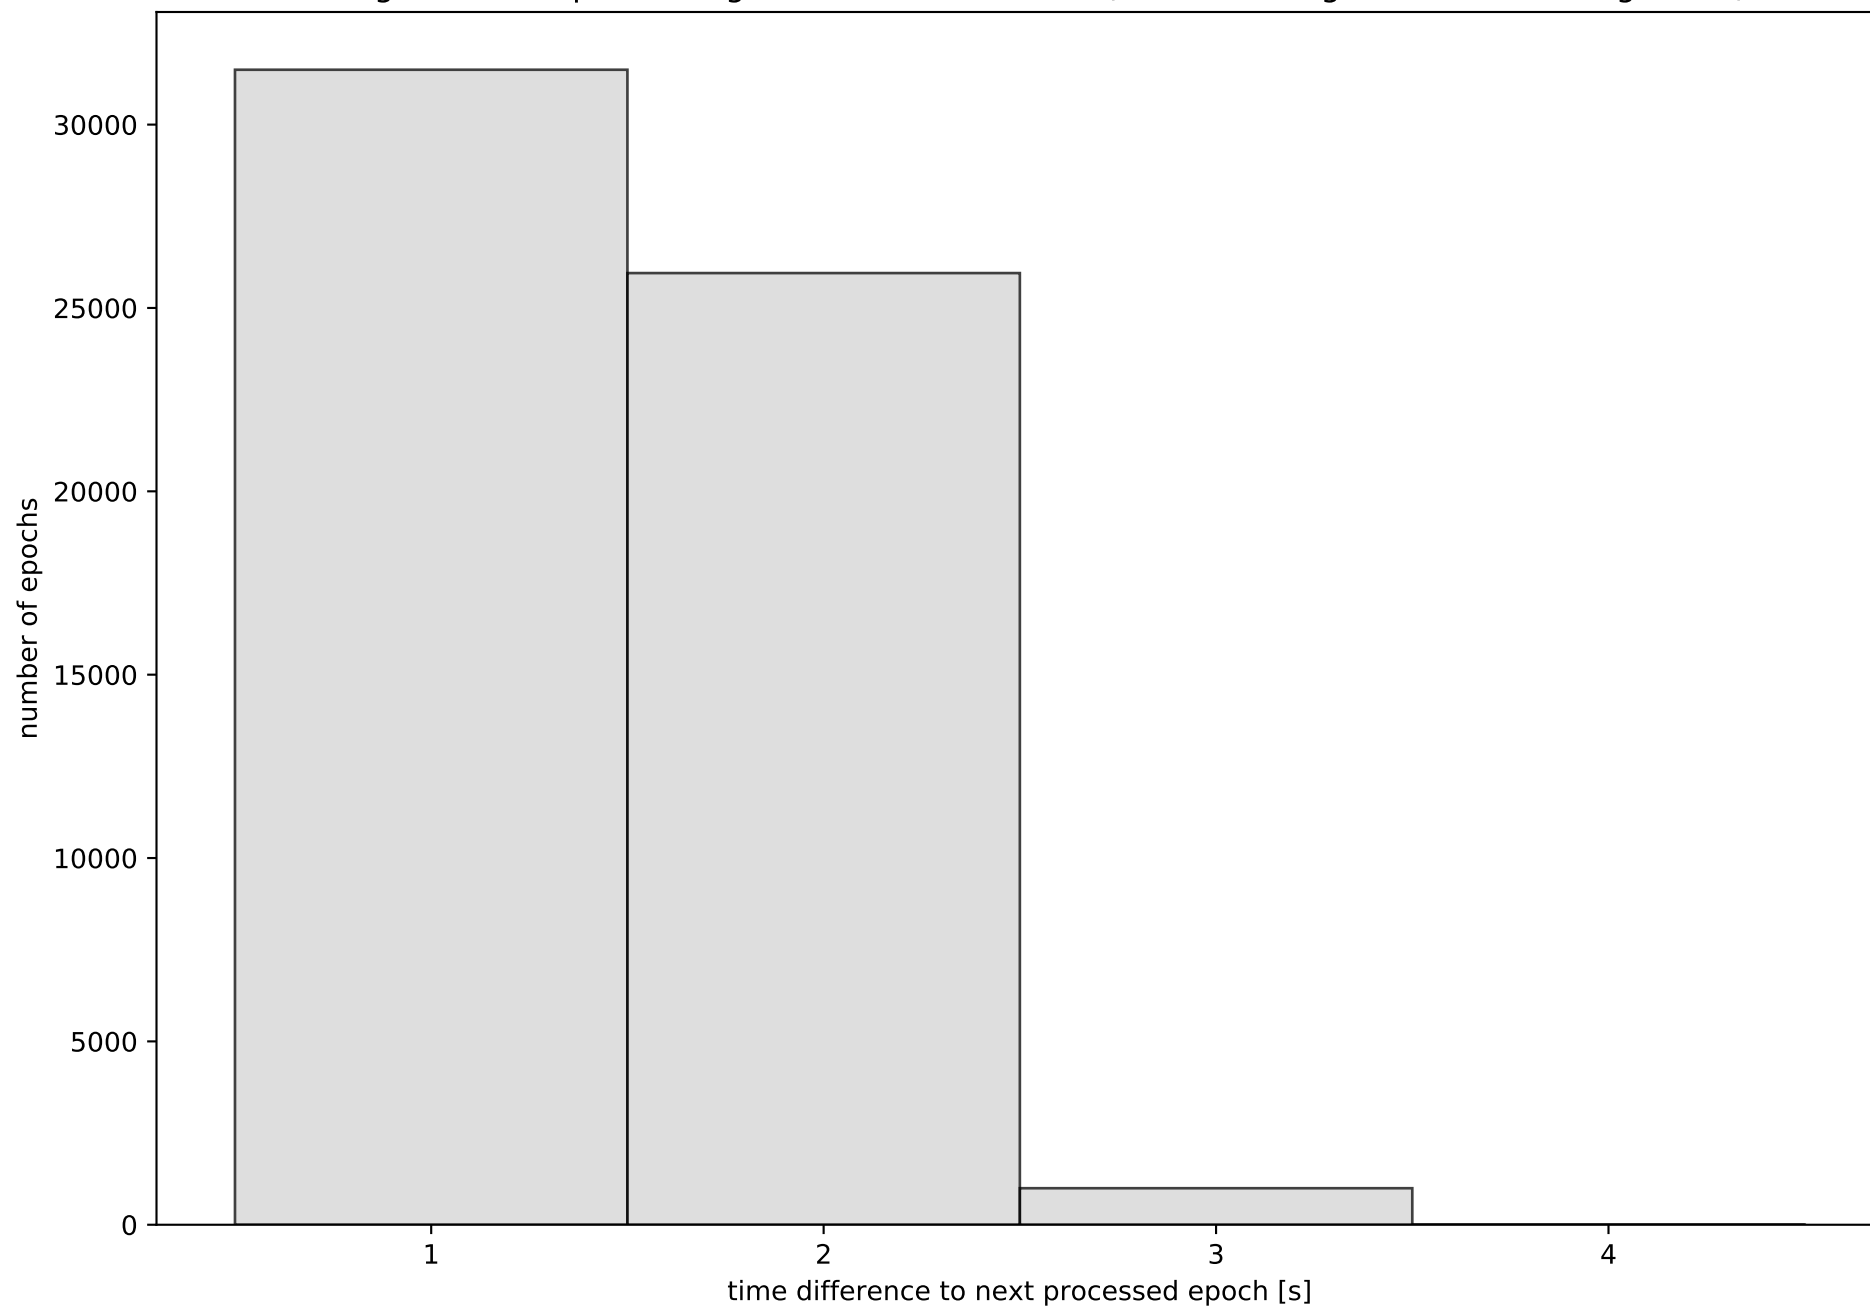


Network N32T with threshold set to 0.3

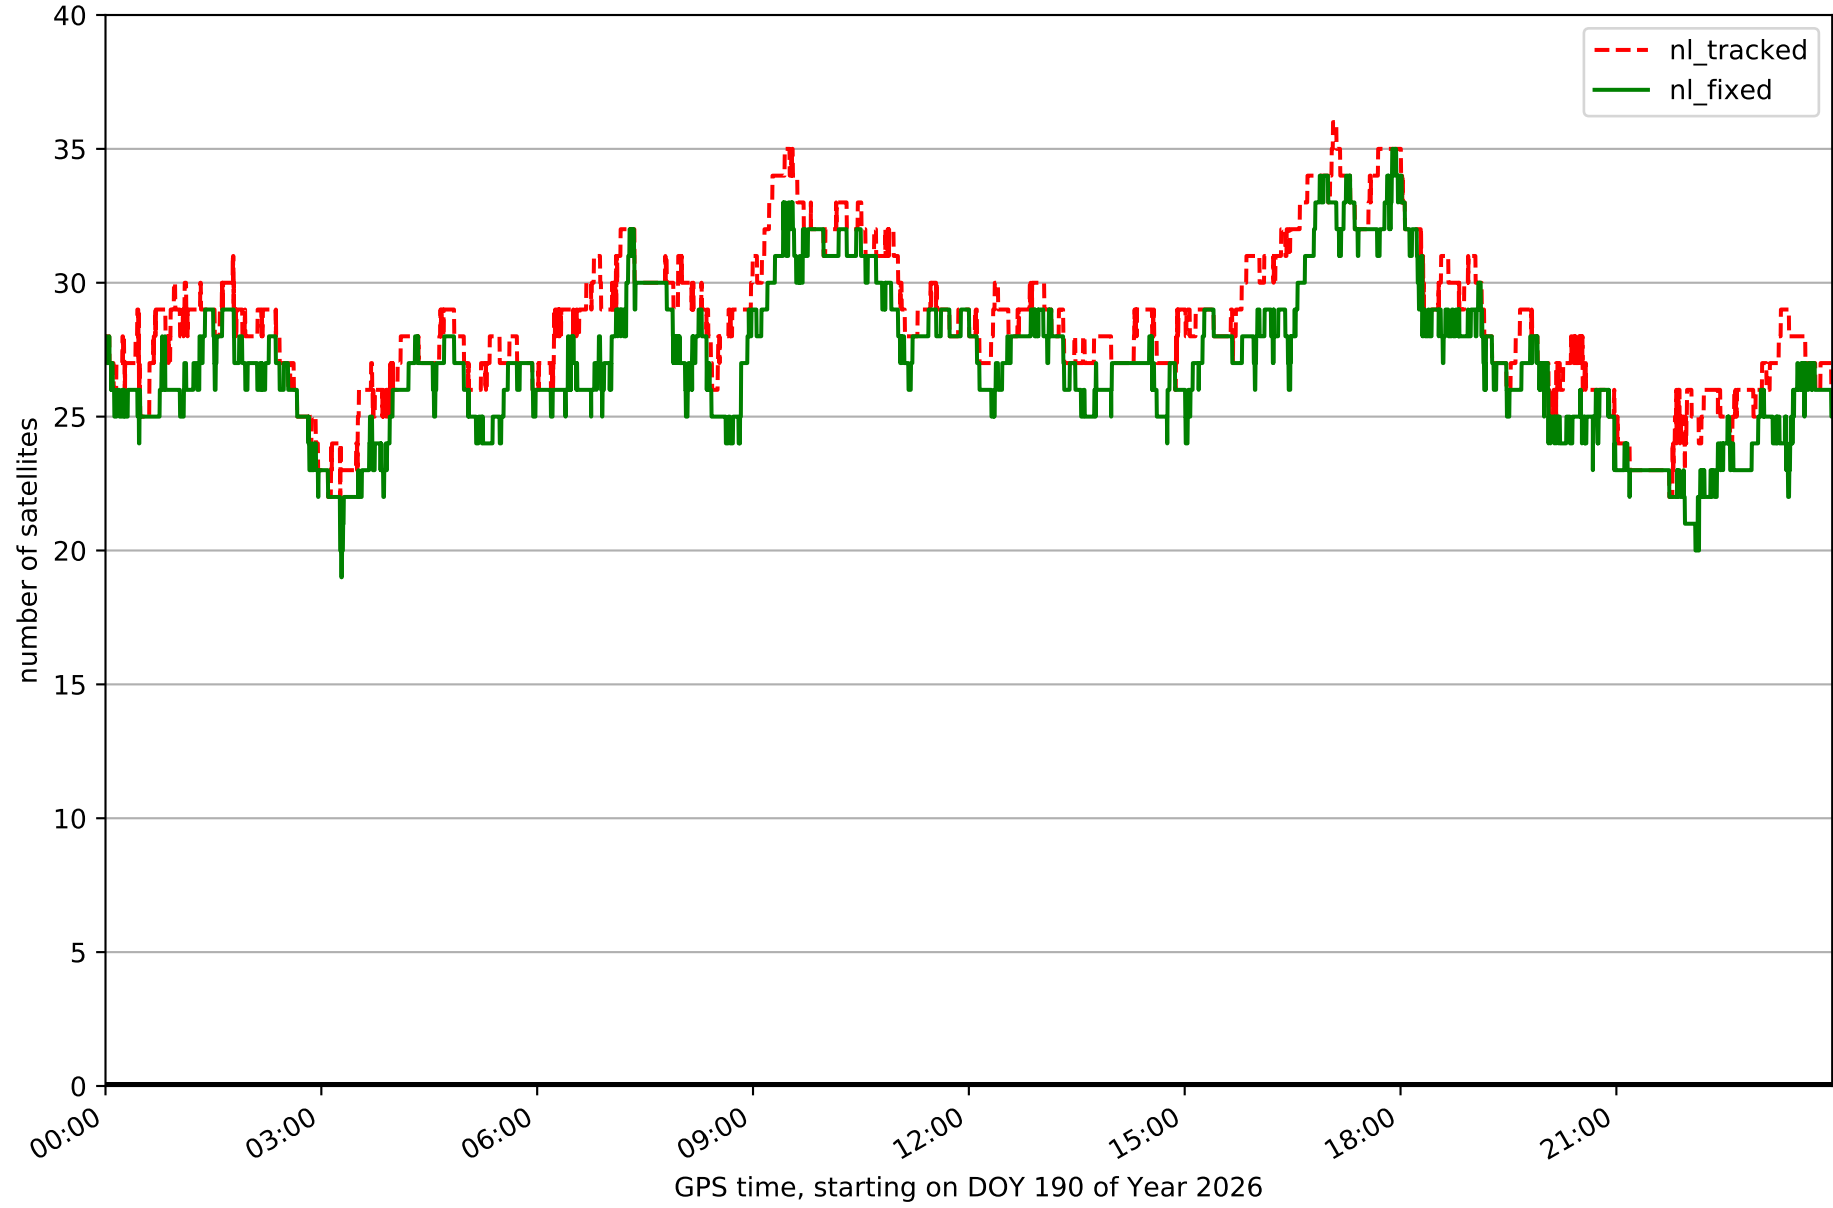


Fixing percentage of satellites in network N32T with threshold set to 0.3

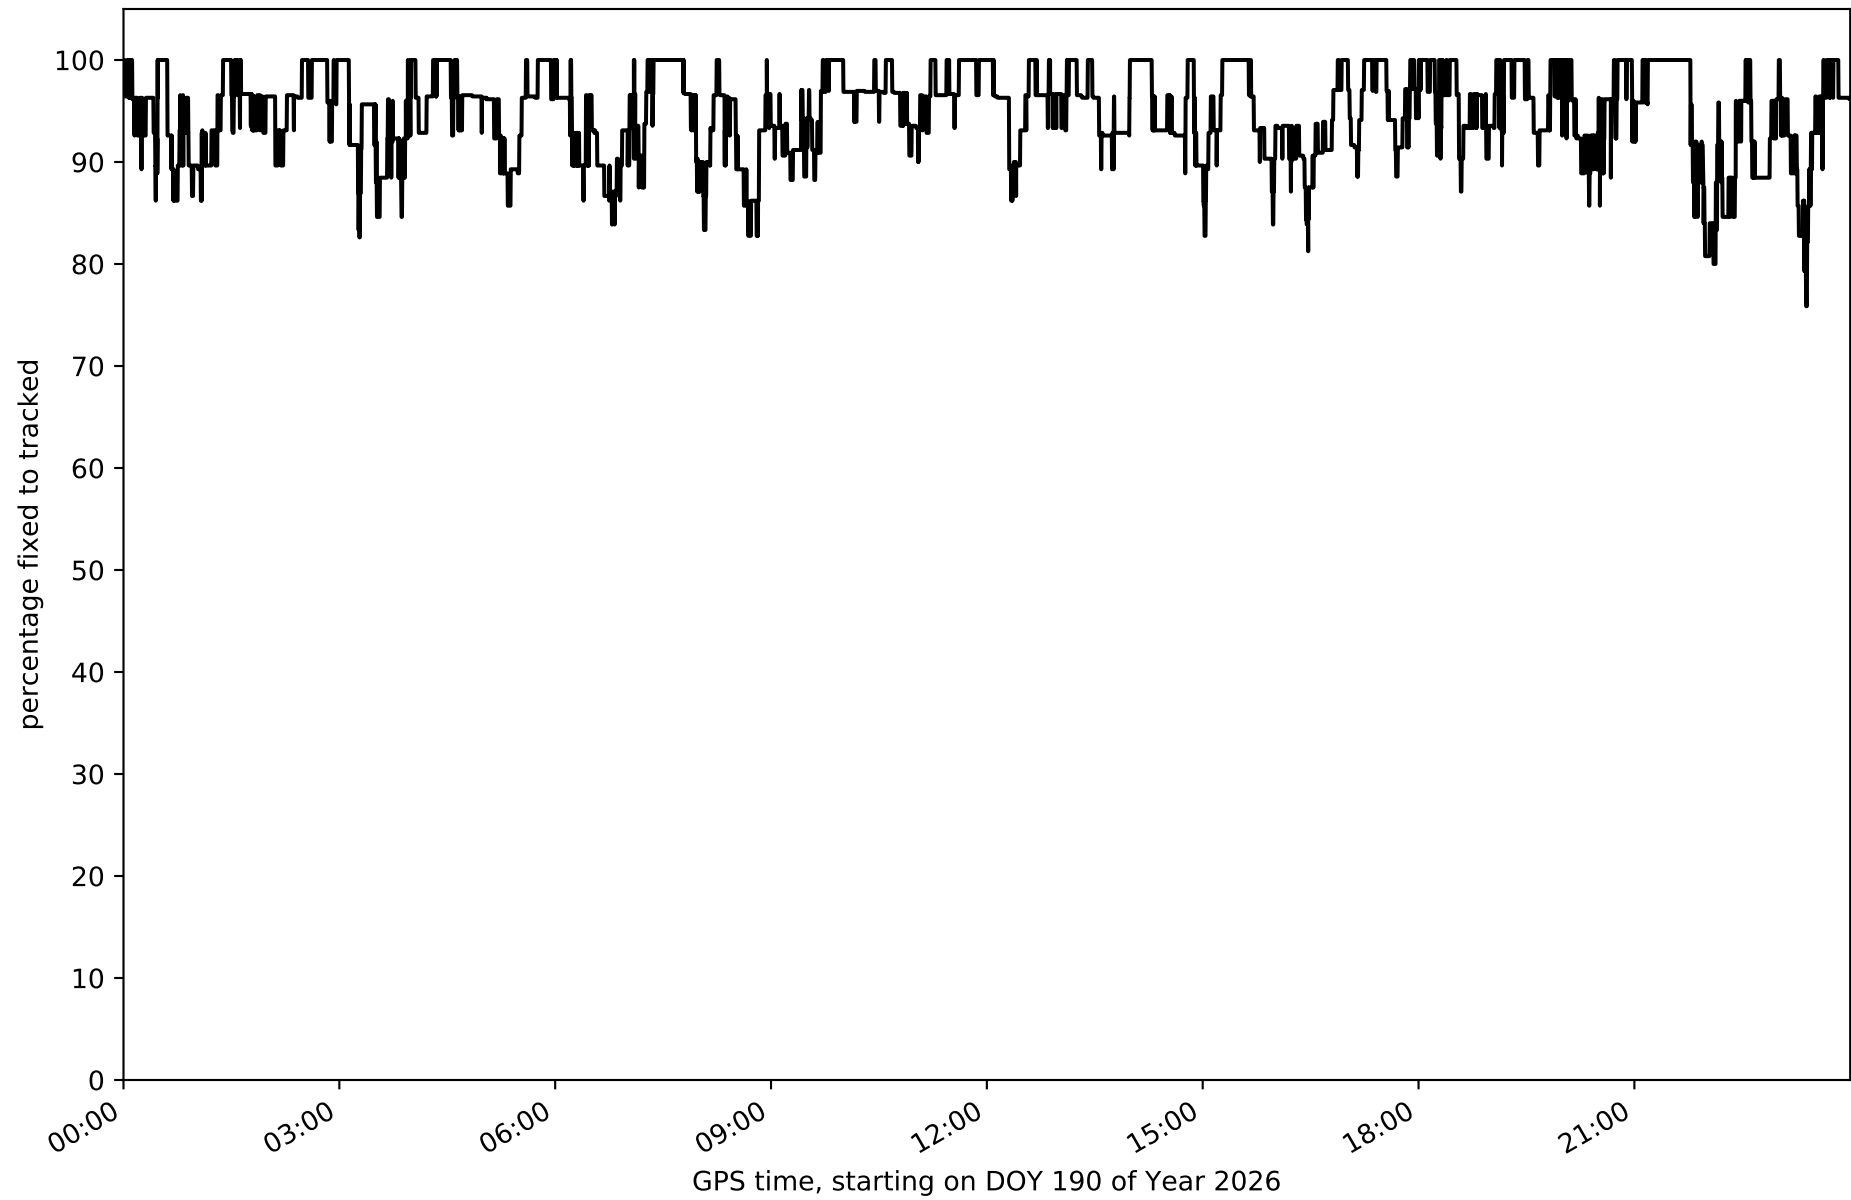


Network N32T - only GPS with threshold set to 0.3

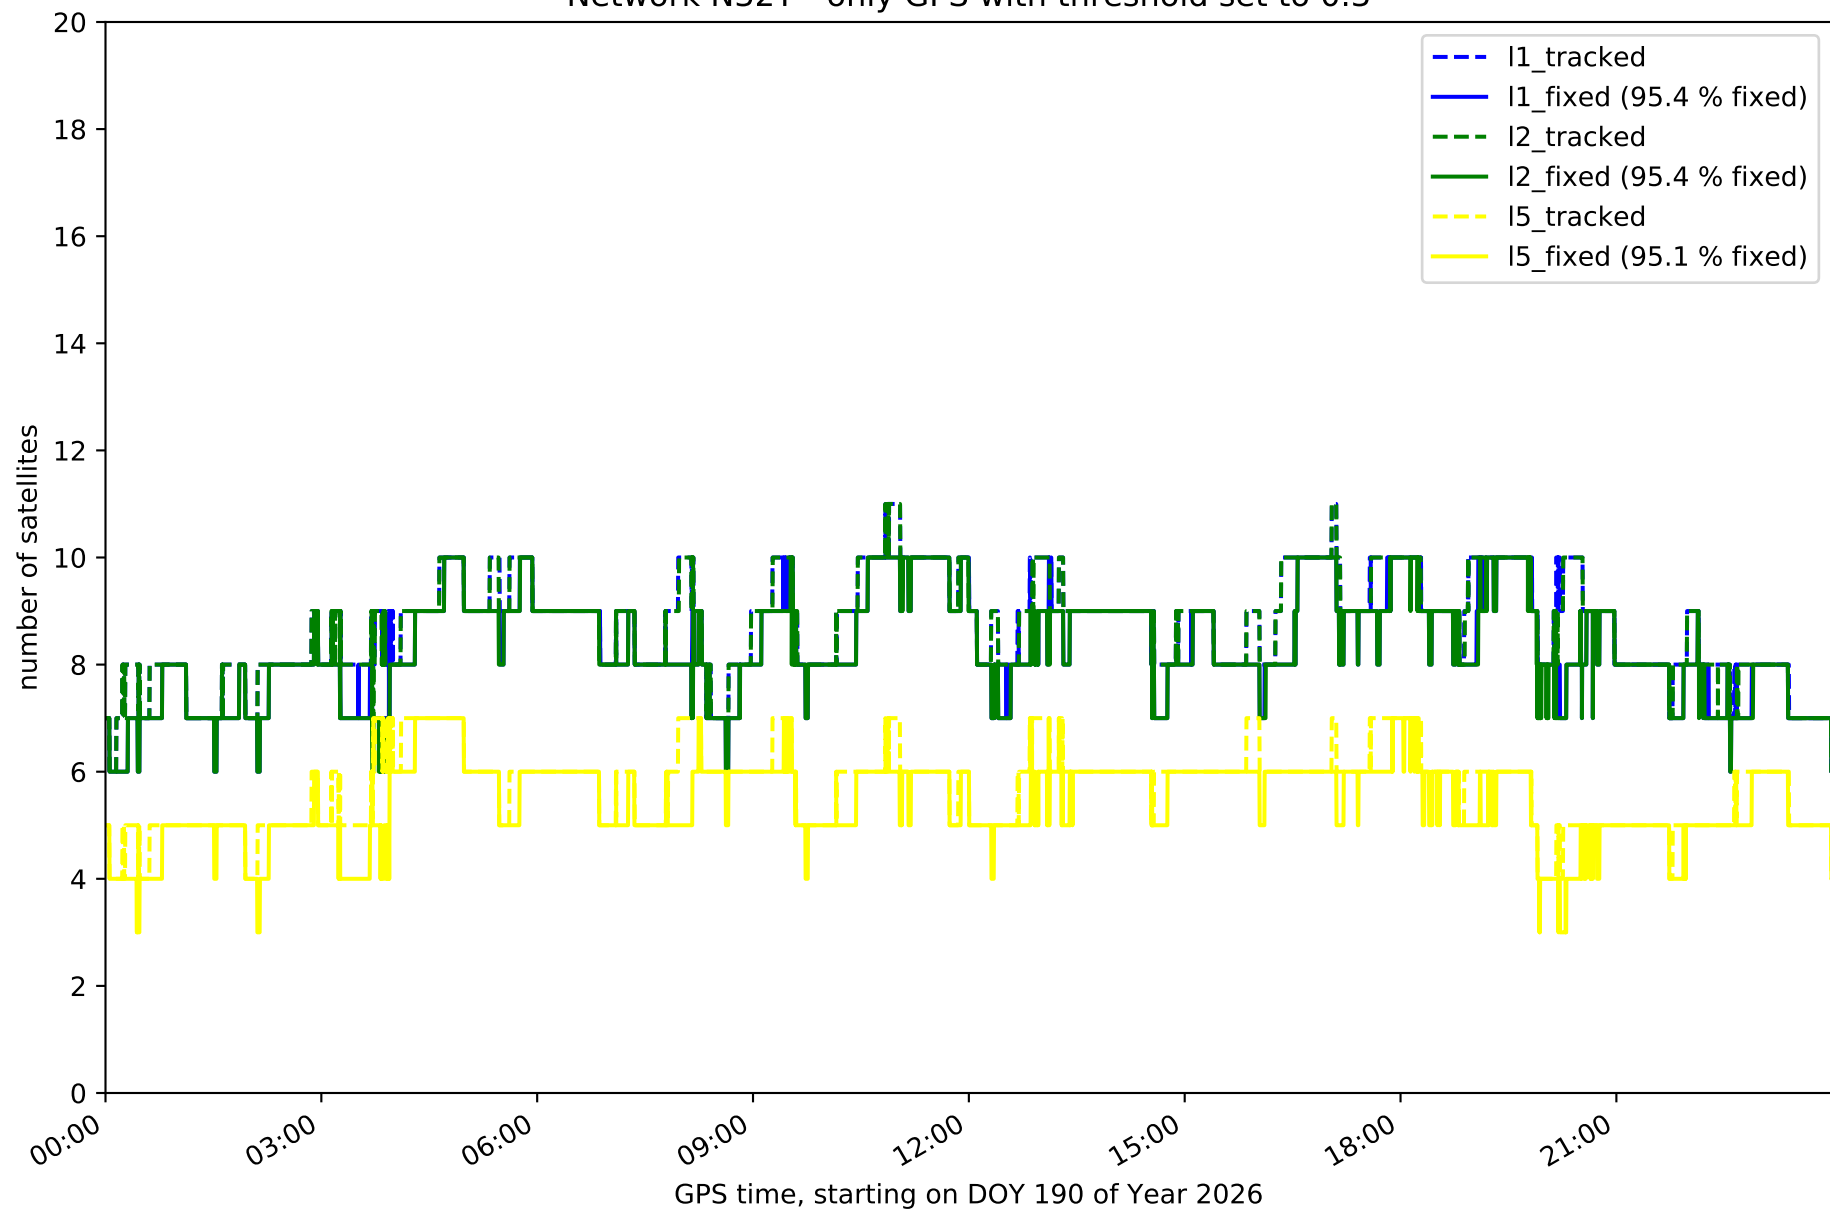


Network N32T - only GLONASS with threshold set to 0.3

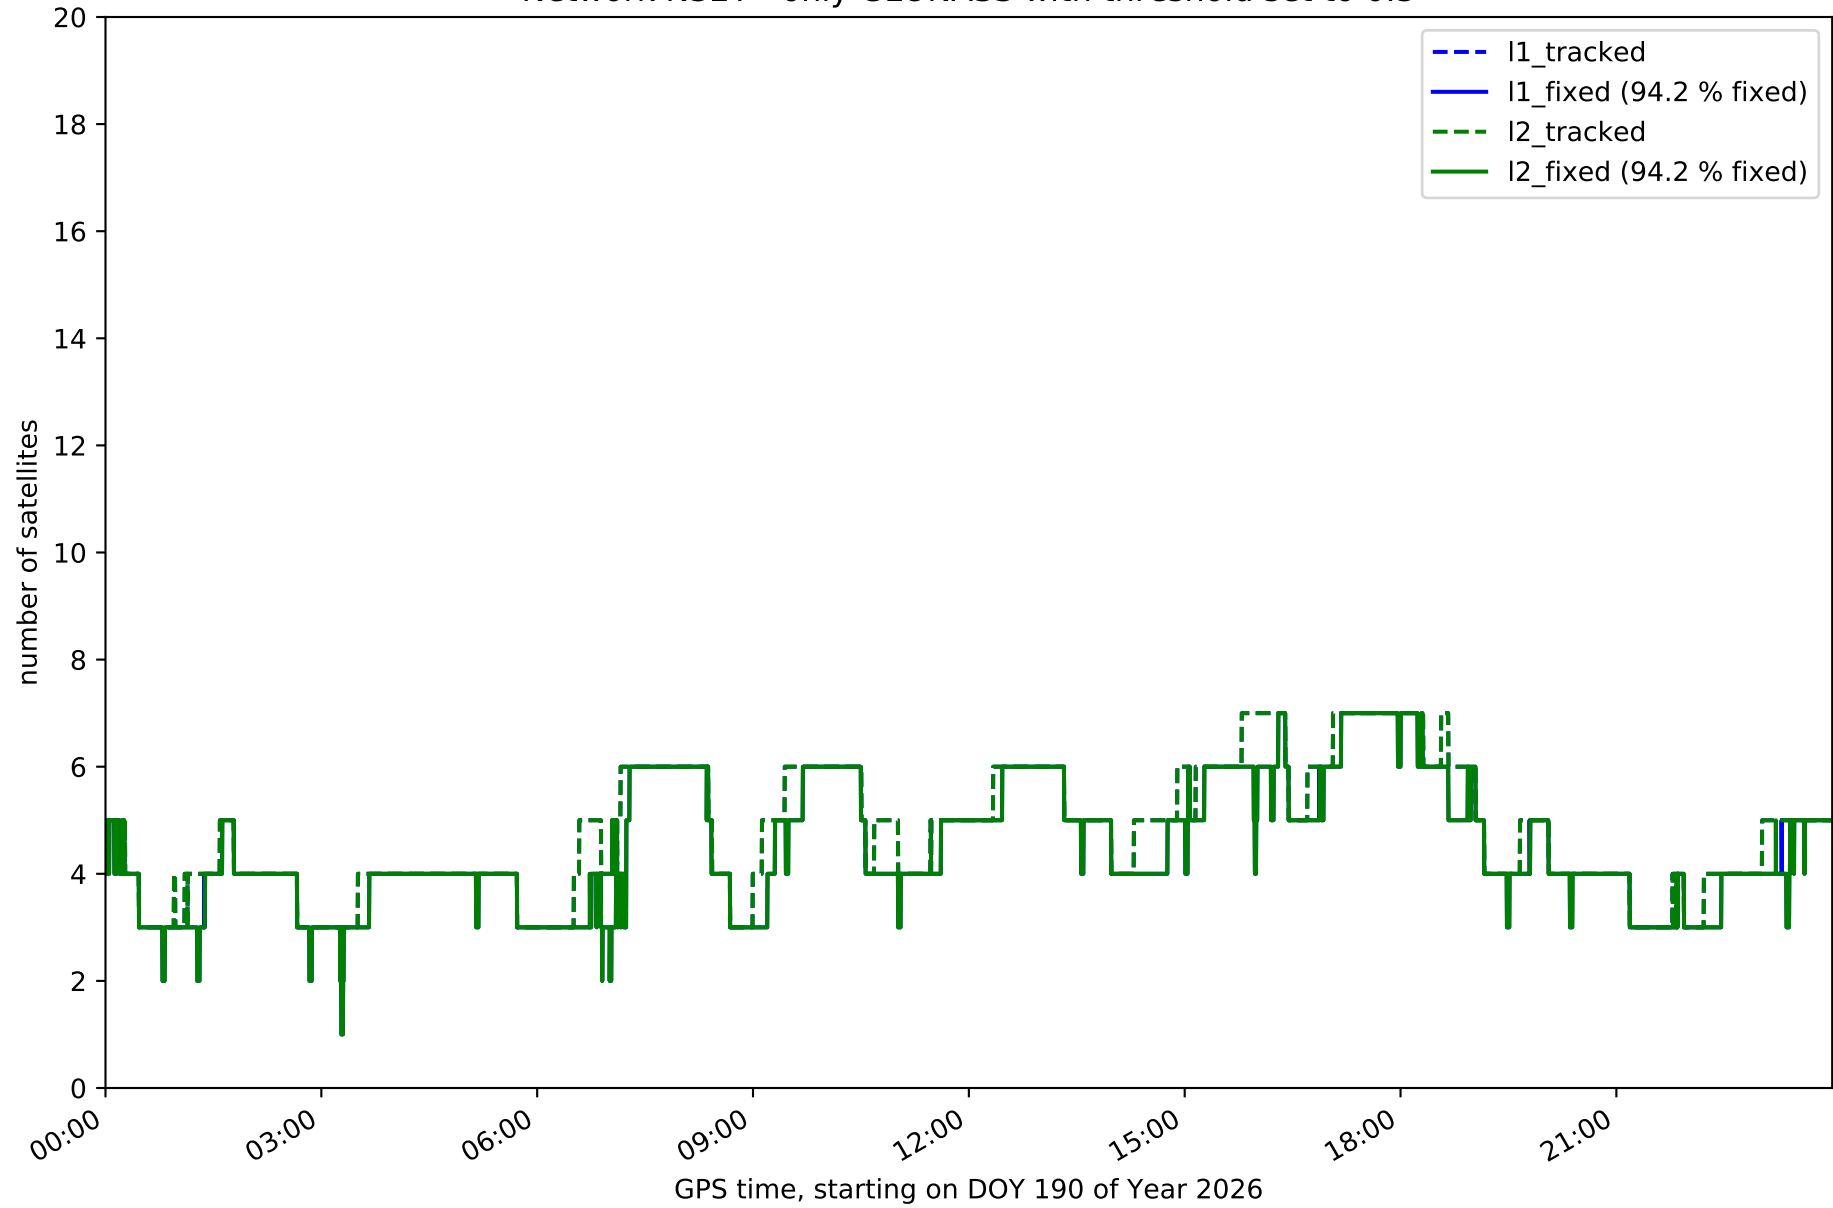


Network N32T - only BDS with threshold set to 0.3

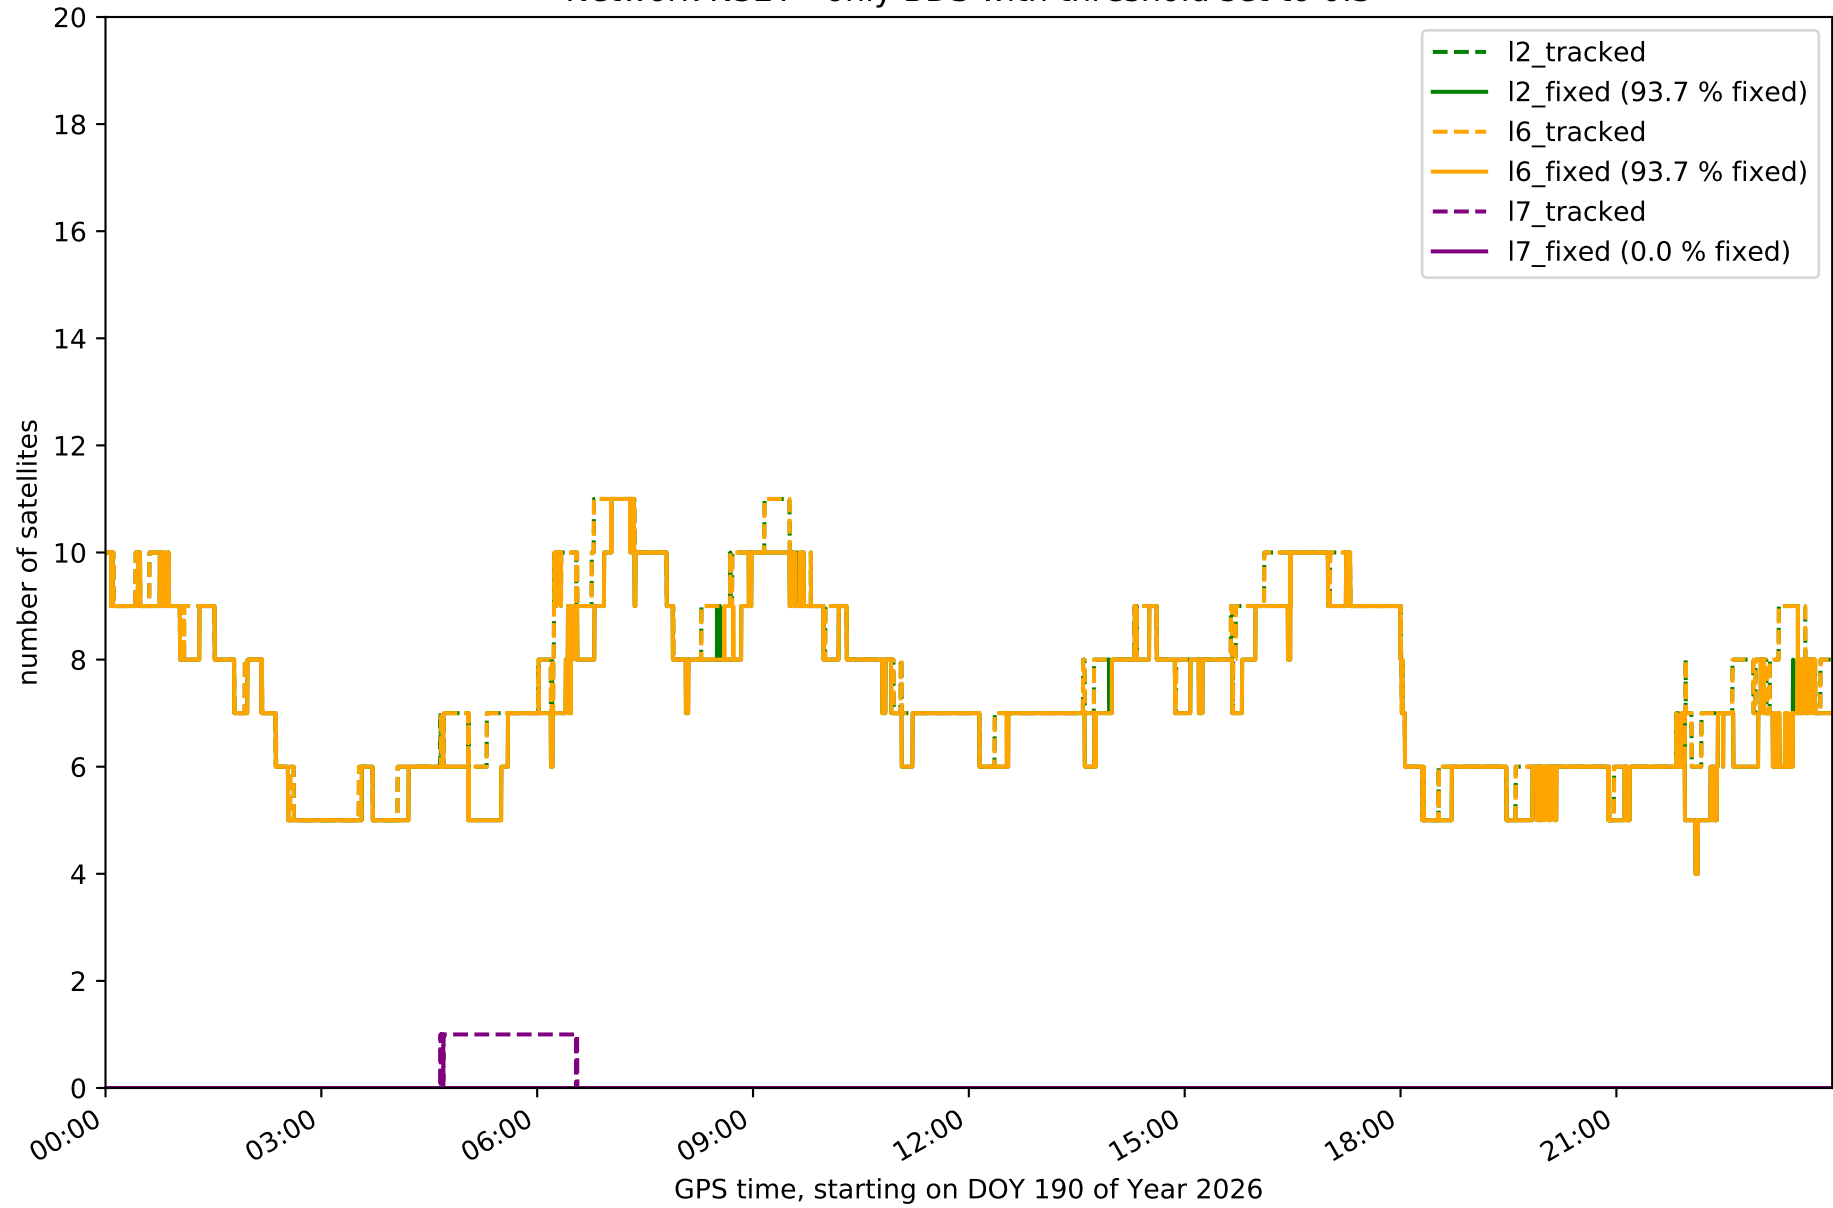


Network N32T - only Galileo with threshold set to 0.3

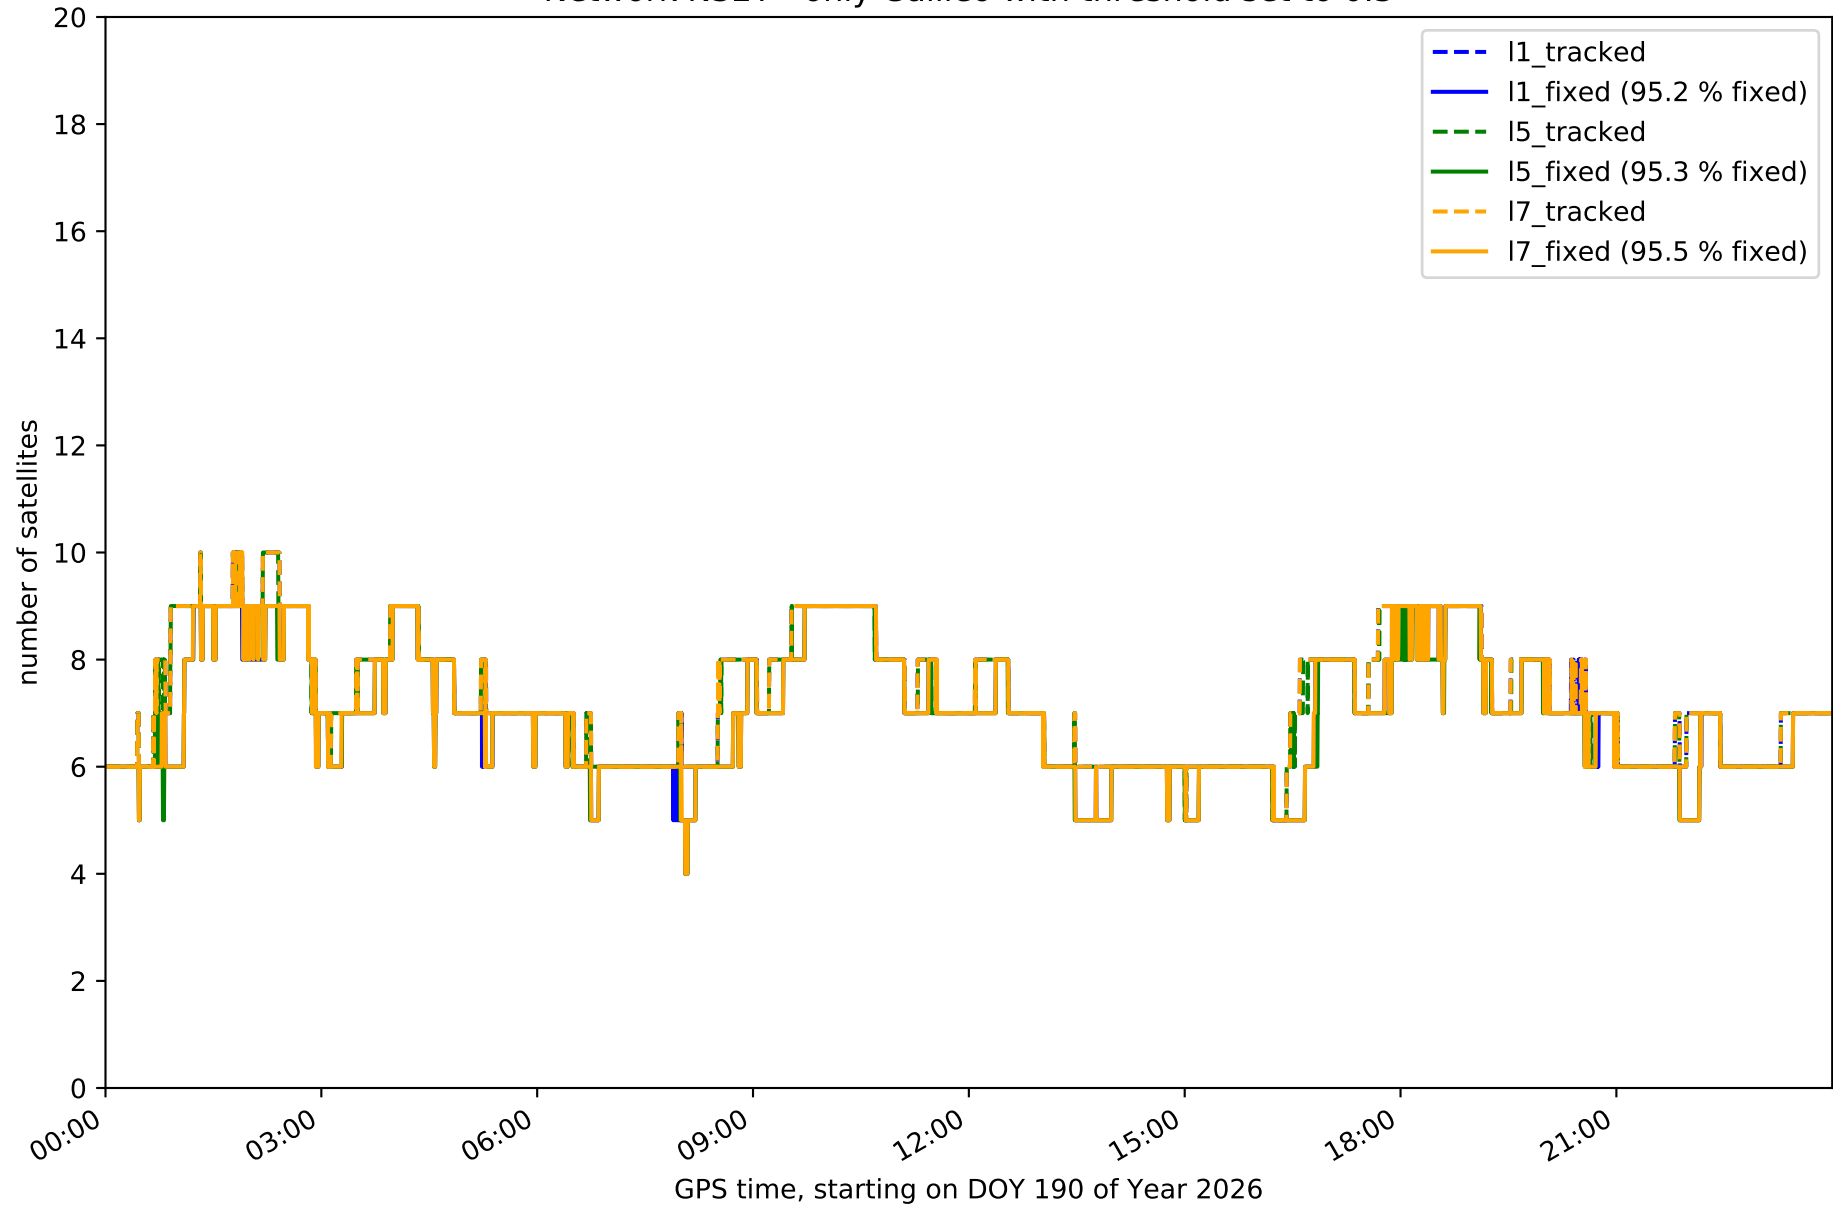


Station EH01 in network N32T

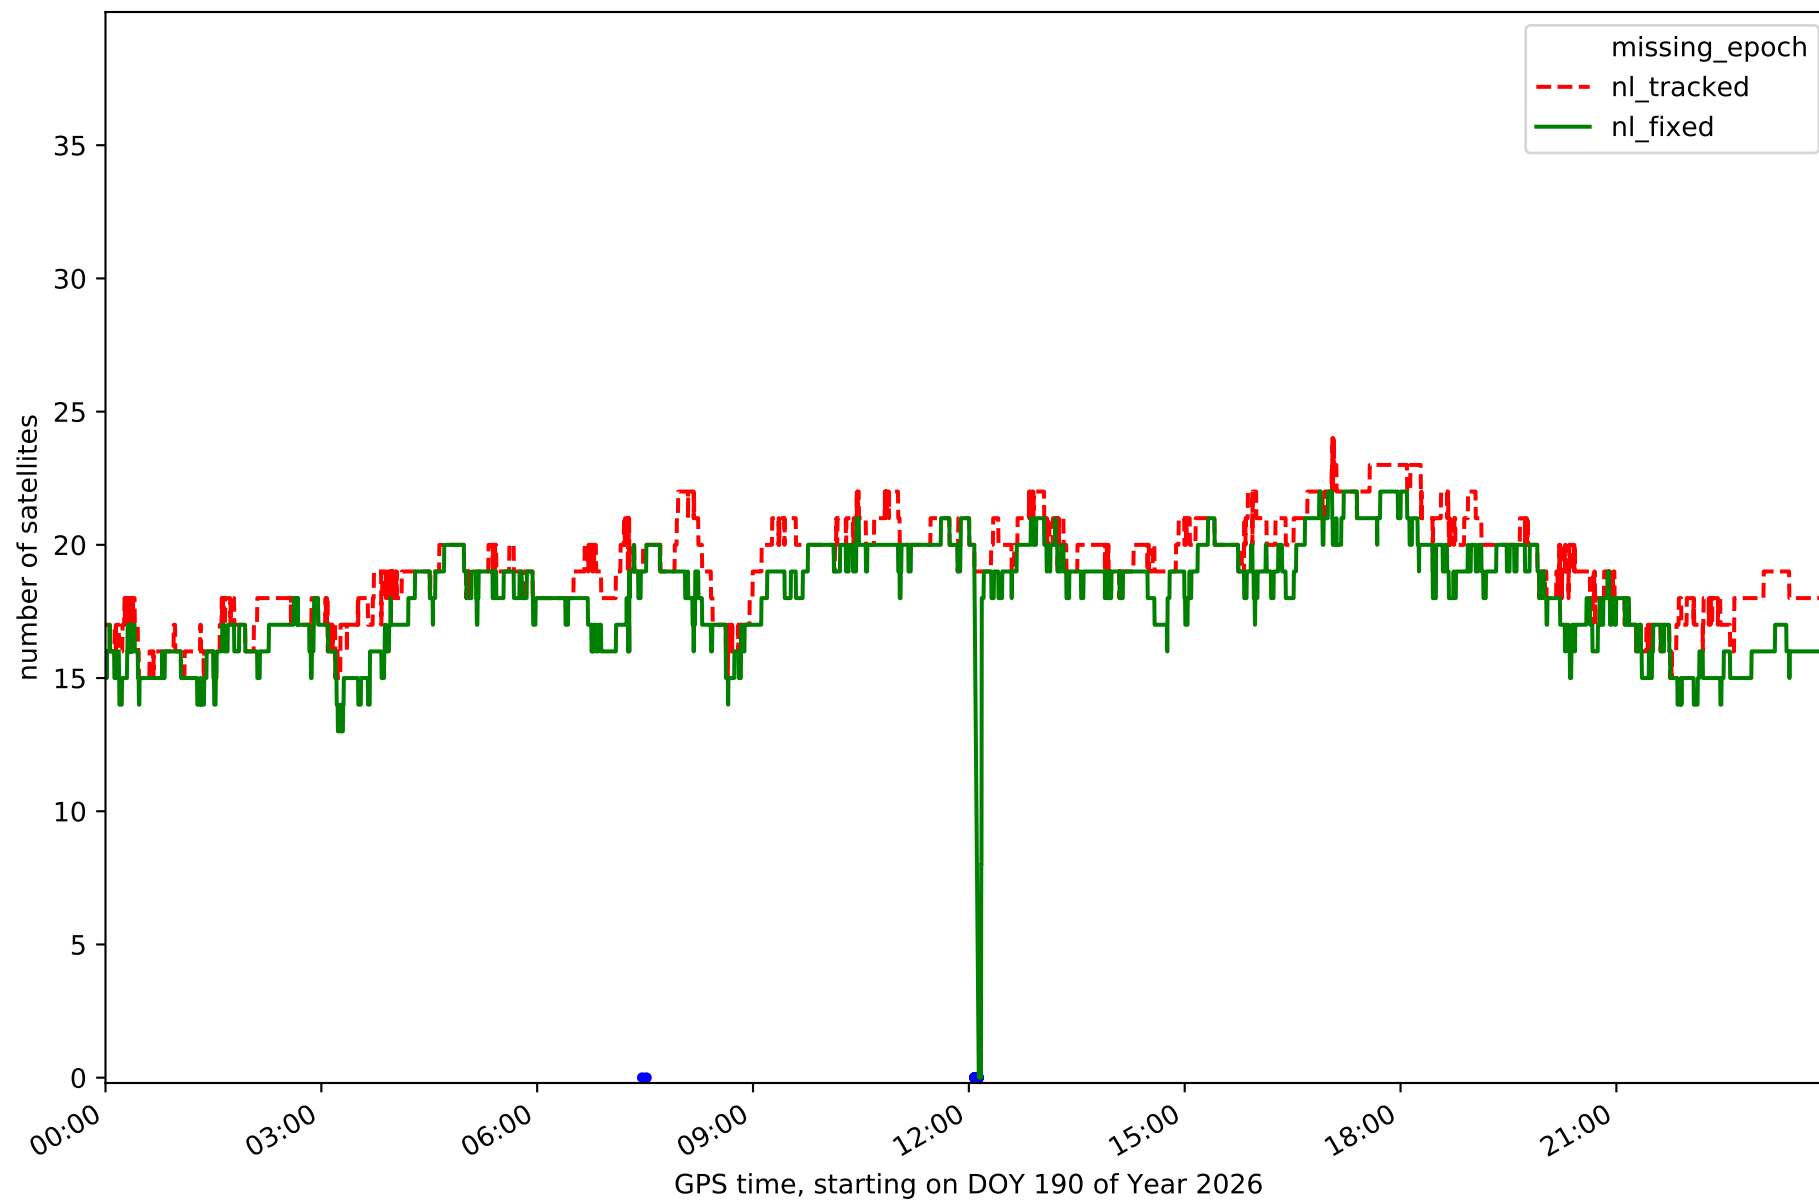


Station EH02 in network N32T

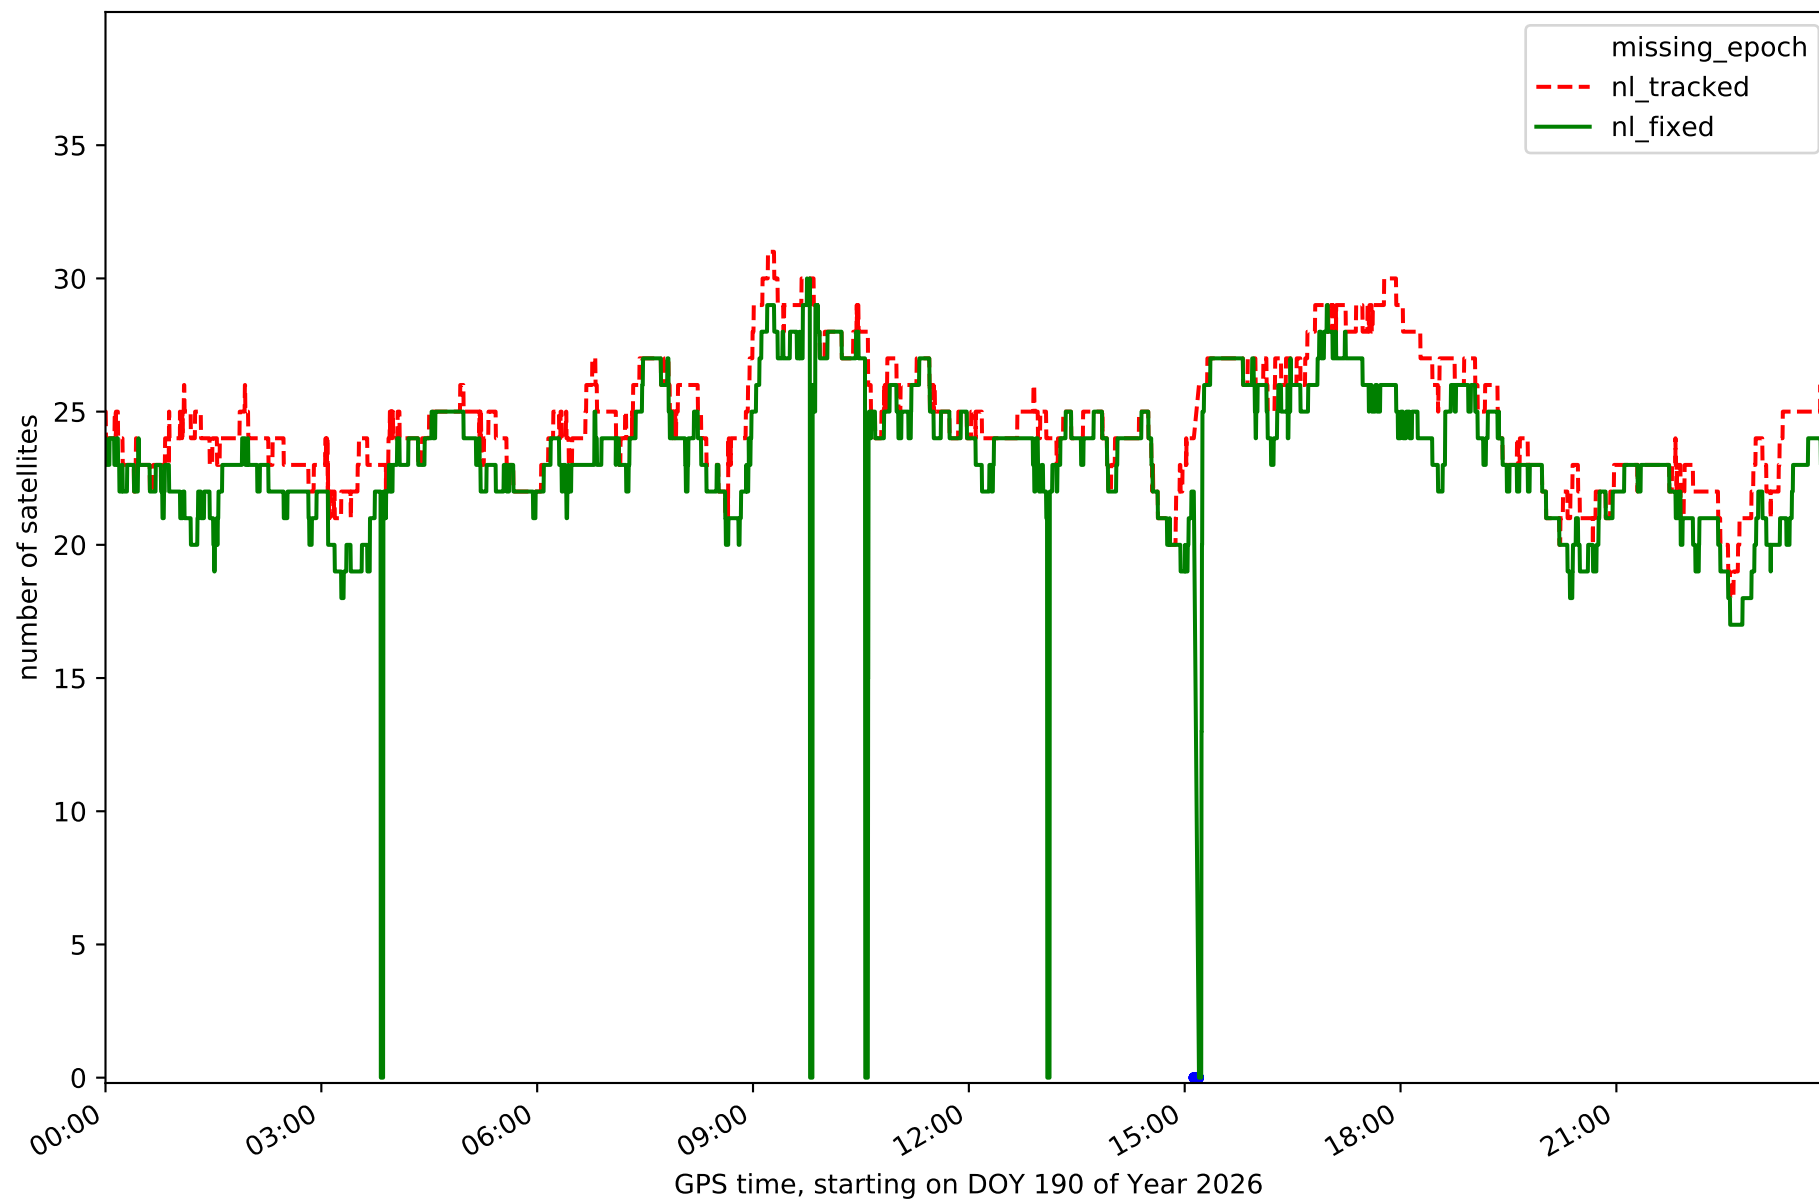


Station GOM1 in network N32T

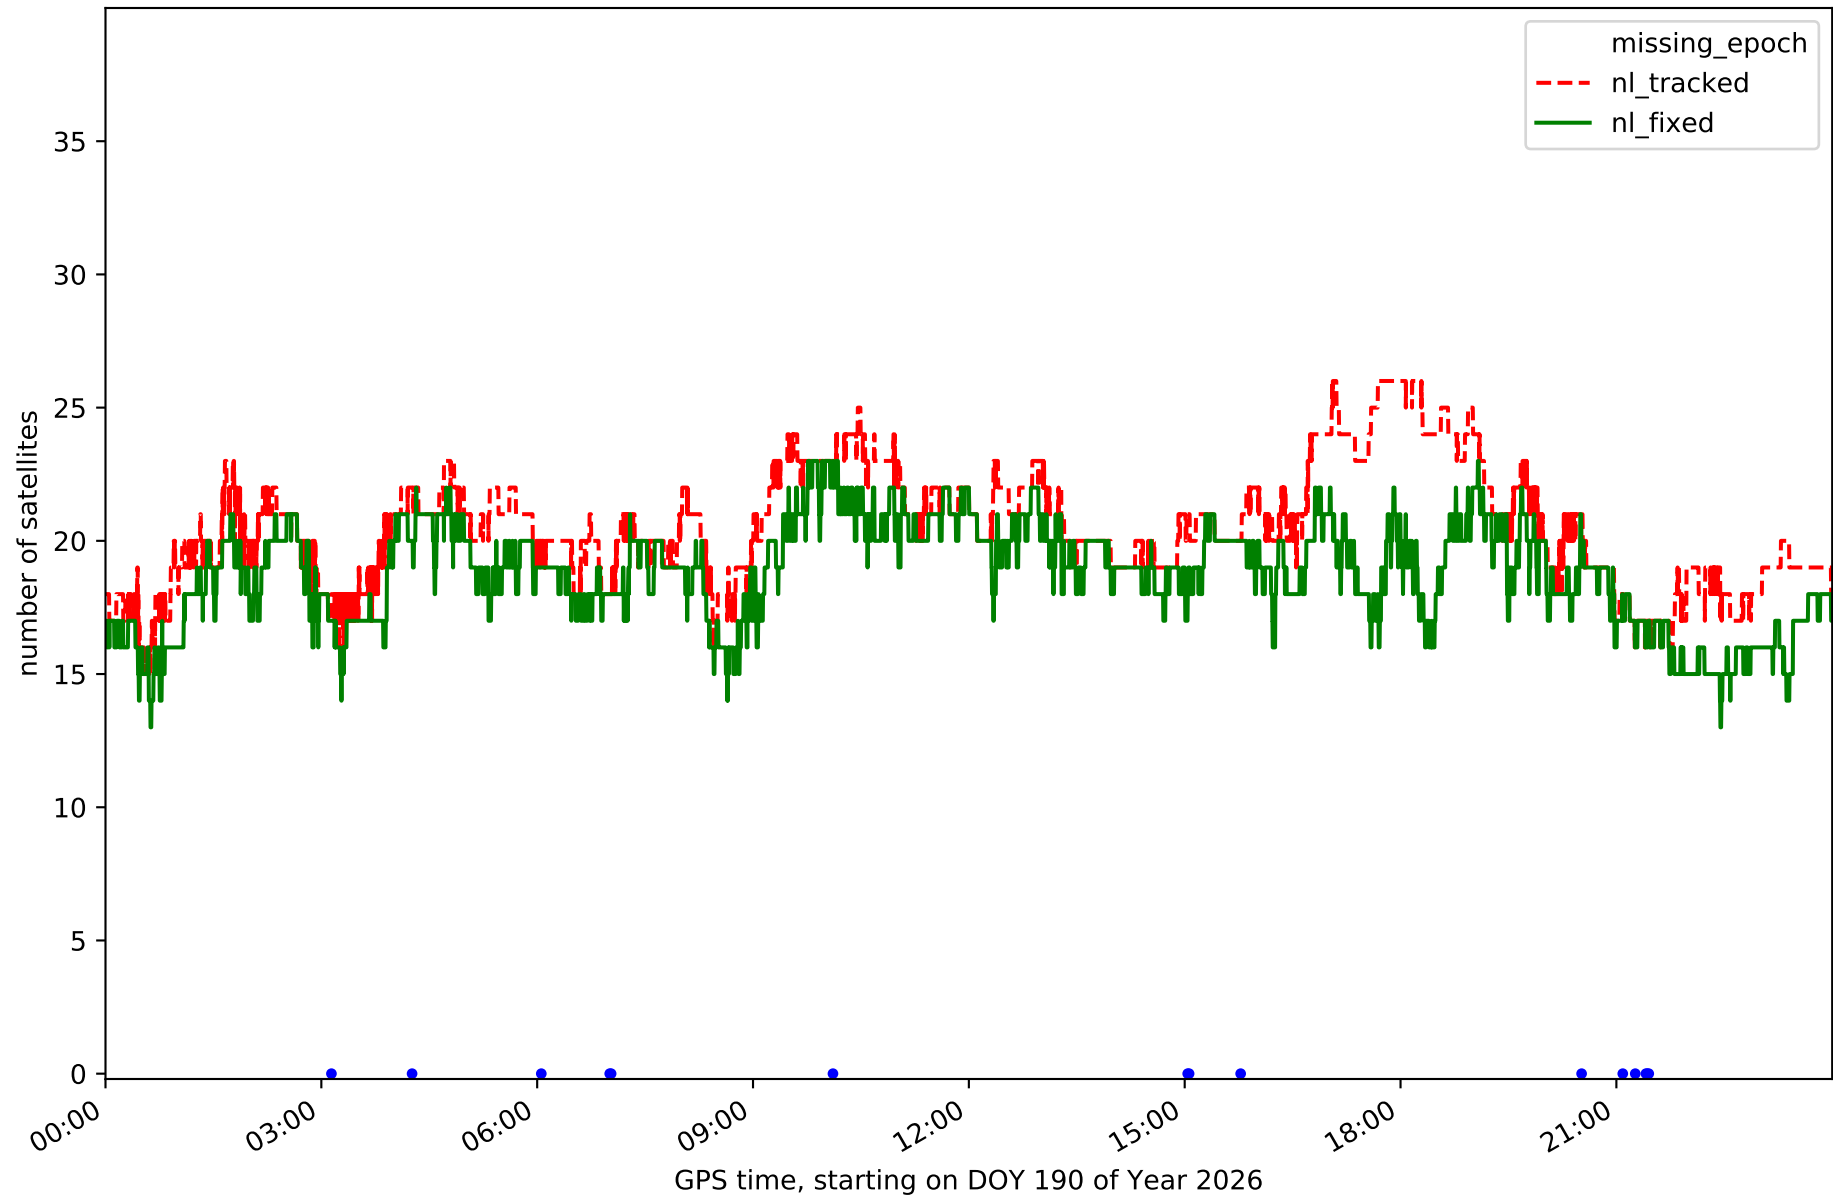


Station GOME in network N32T

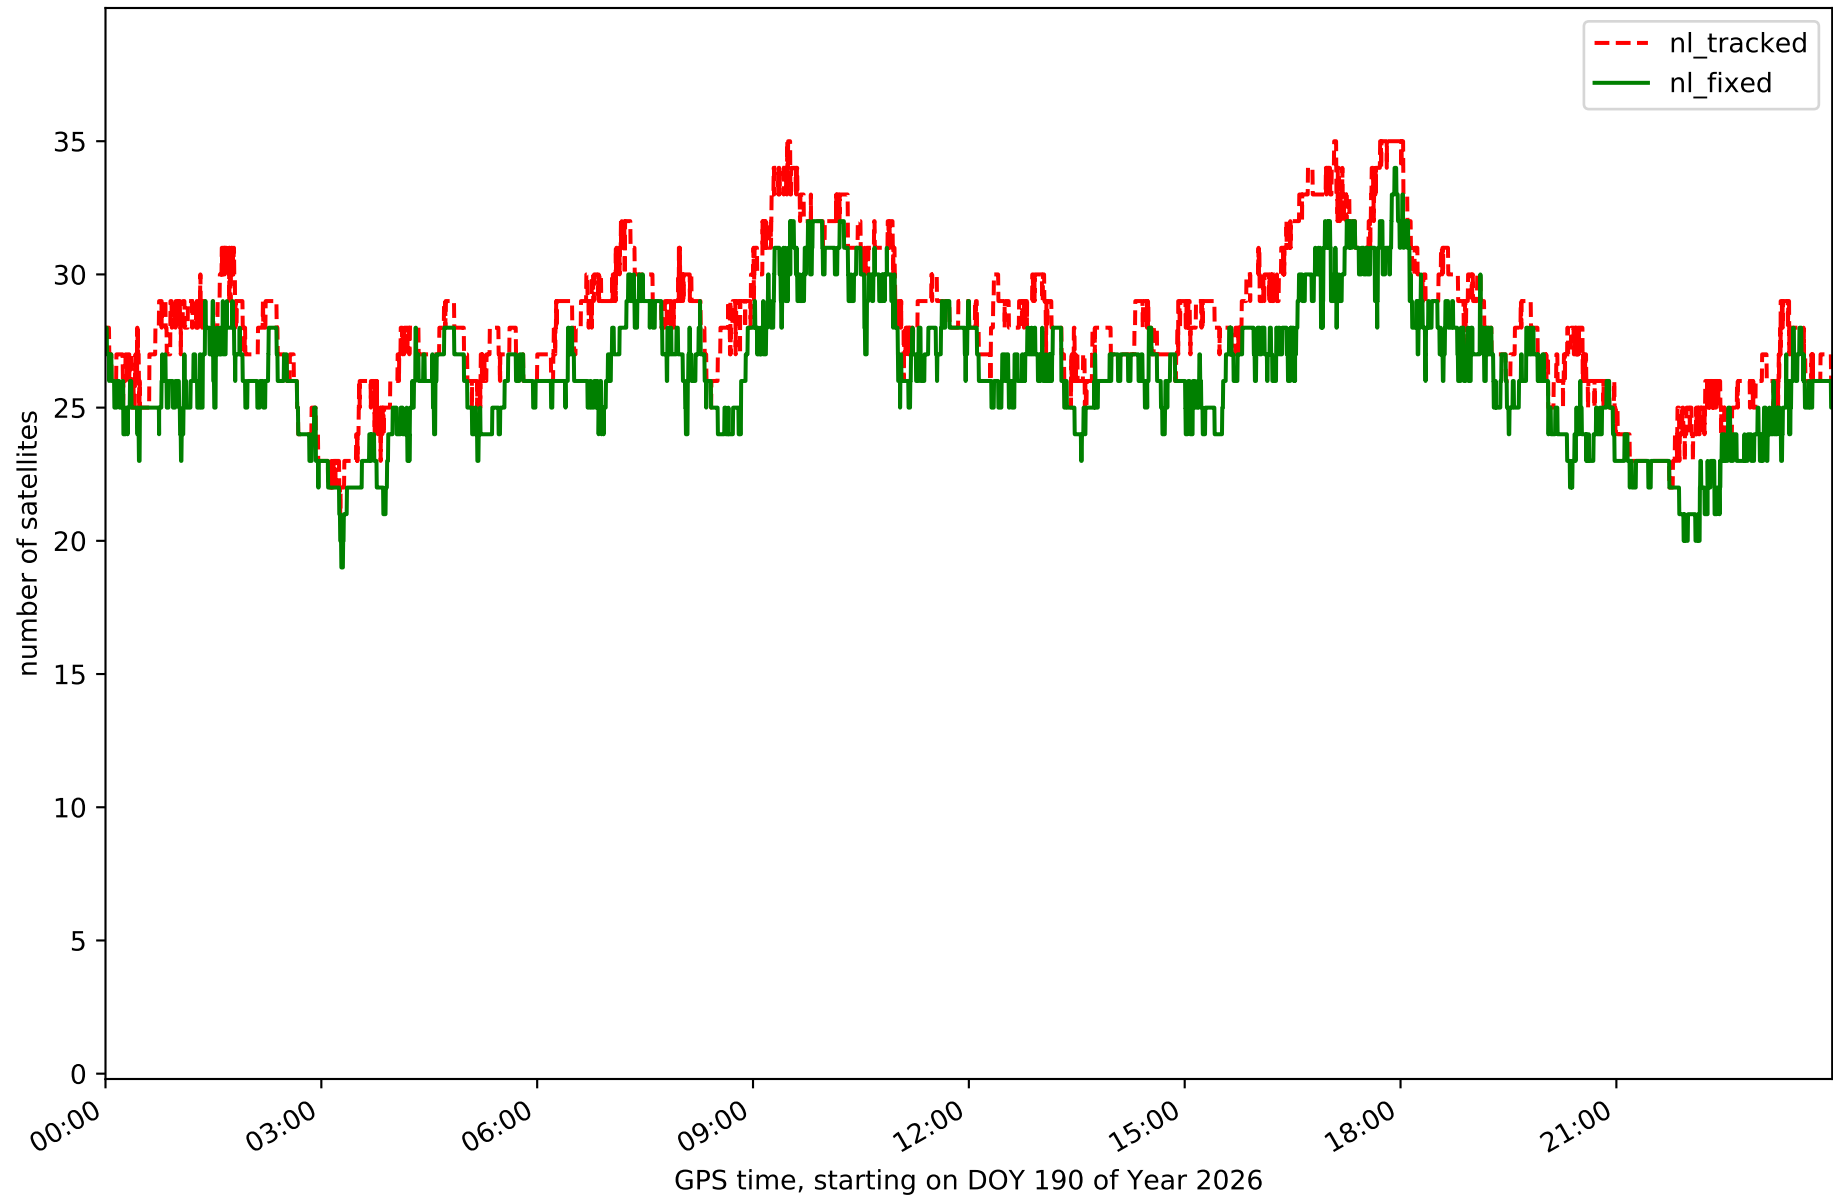


Station IZAN in network N32T

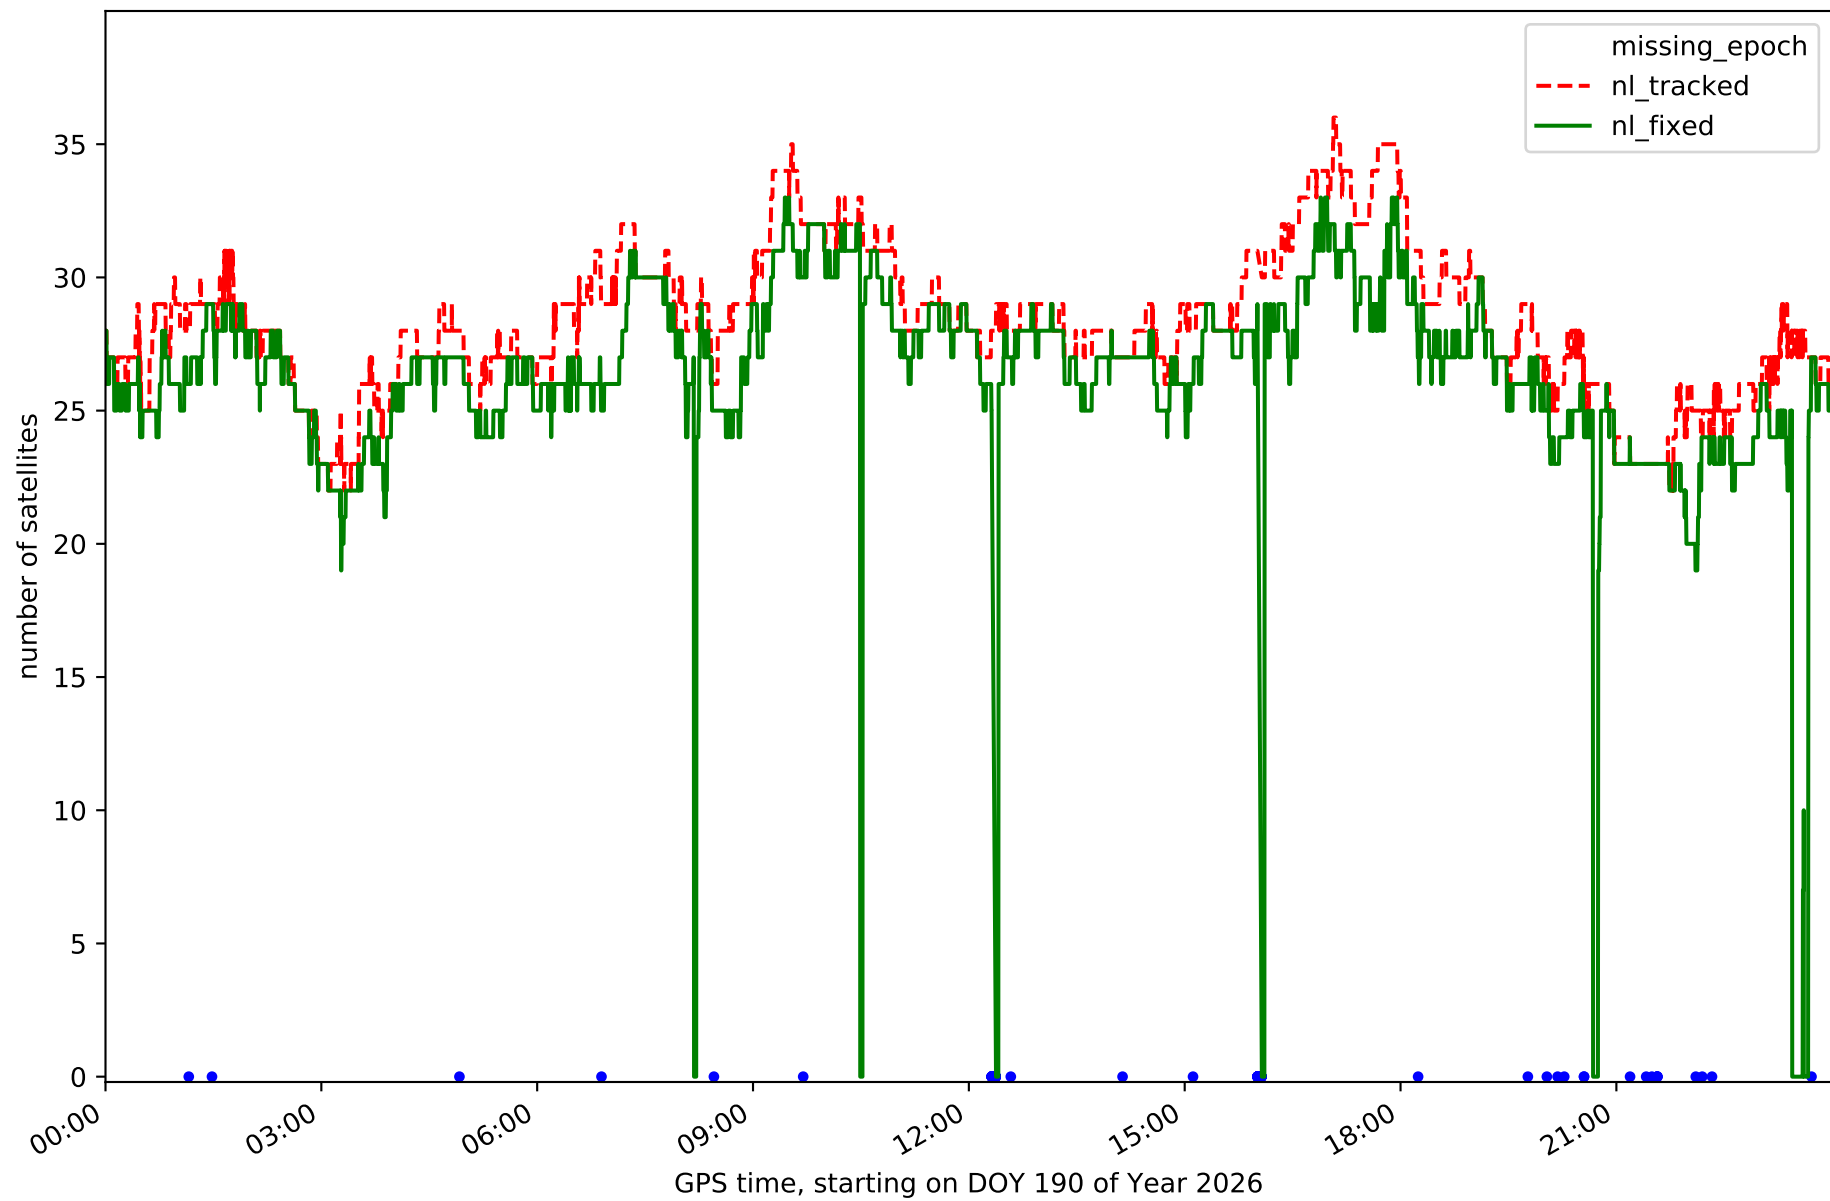


Station LP01 in network N32T

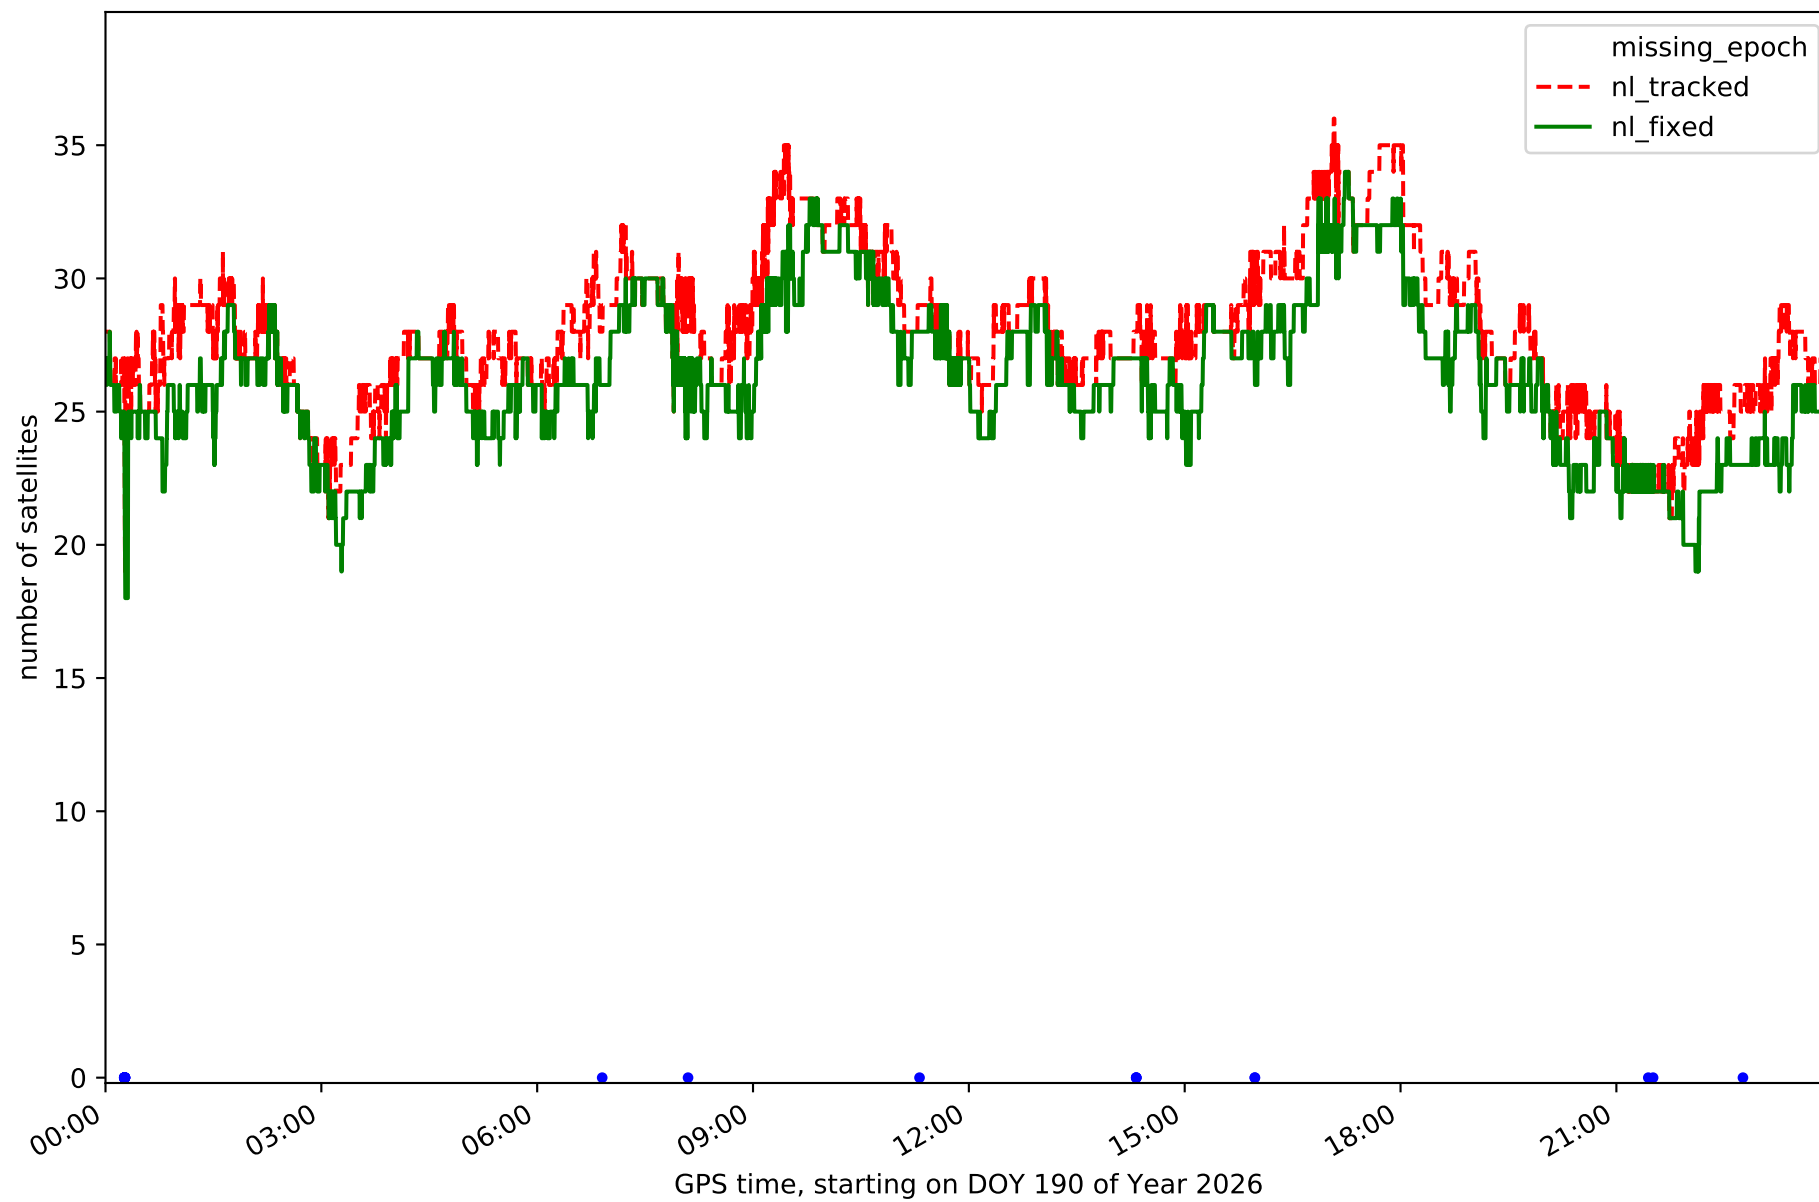


Station LP03 in network N32T

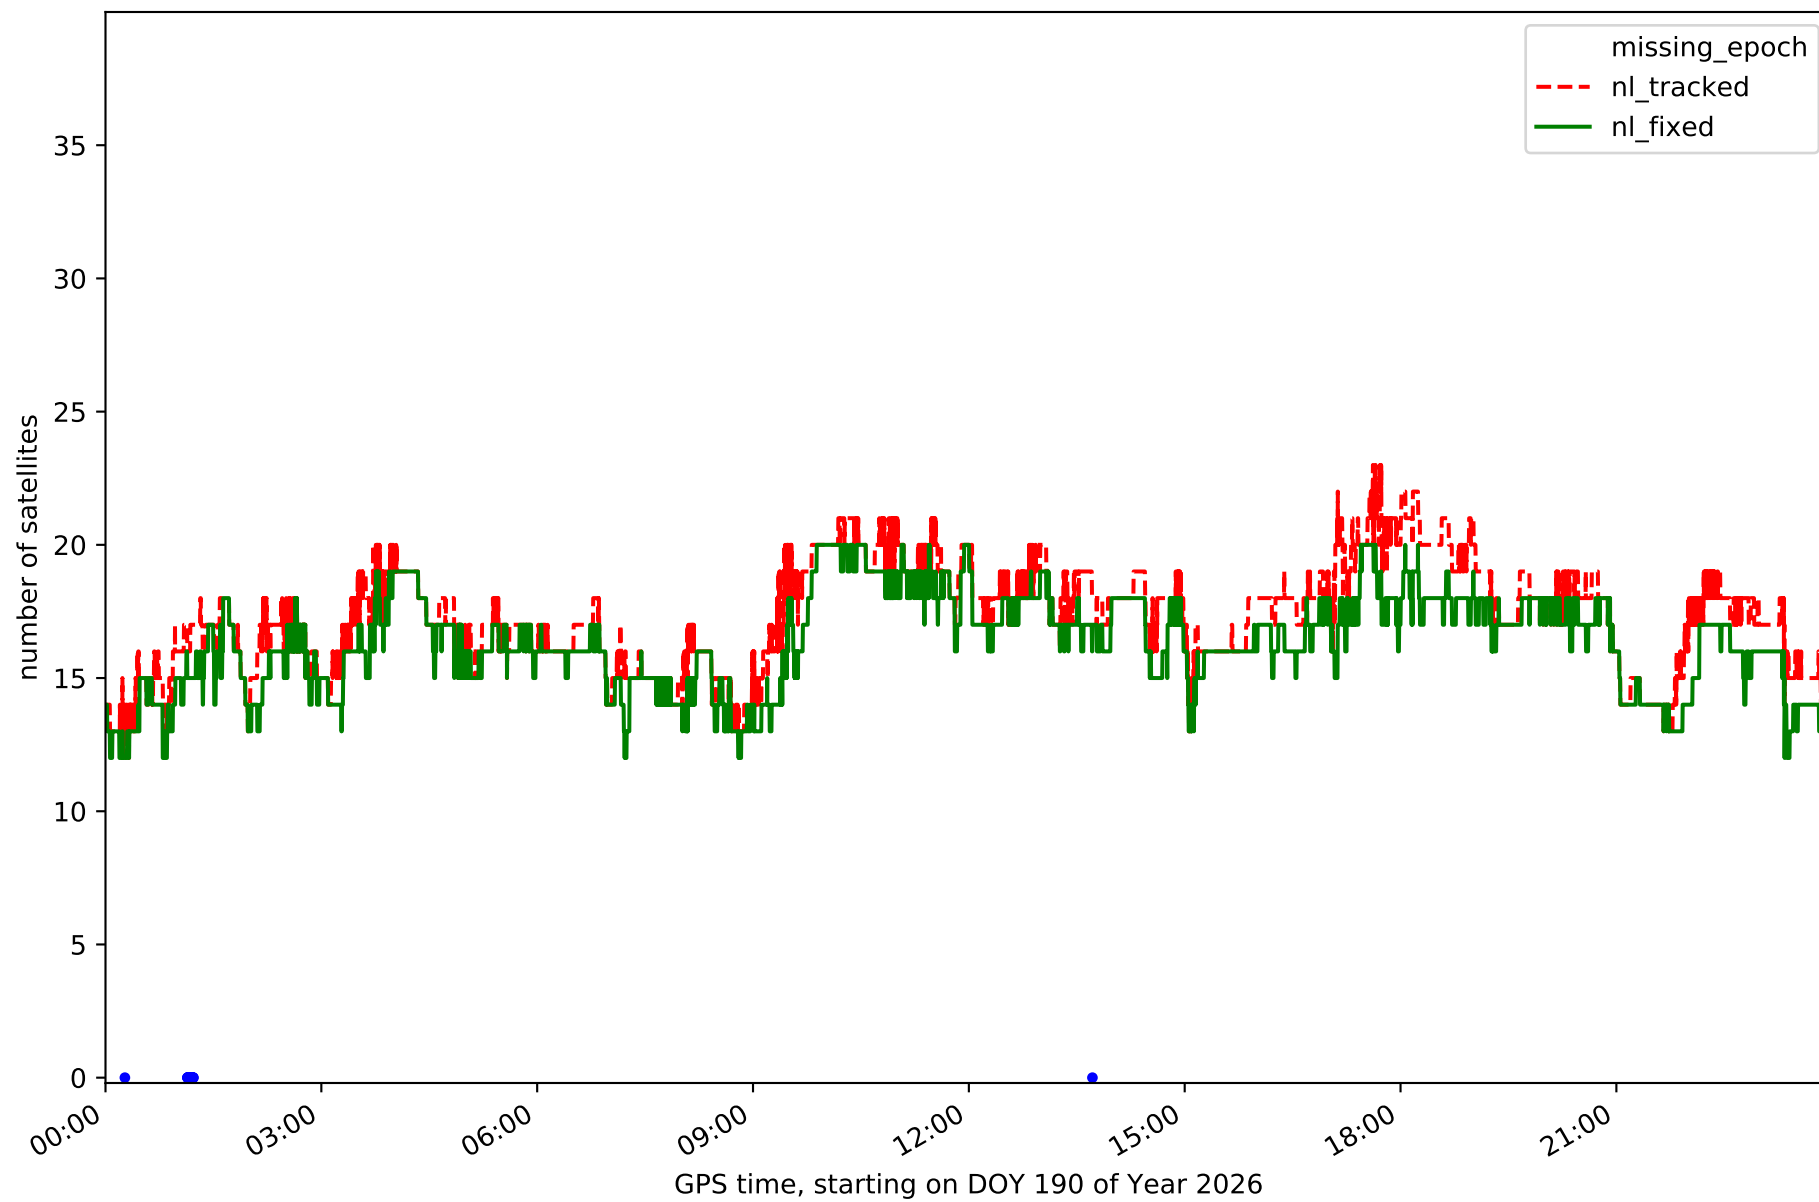


Station LPAL in network N32T

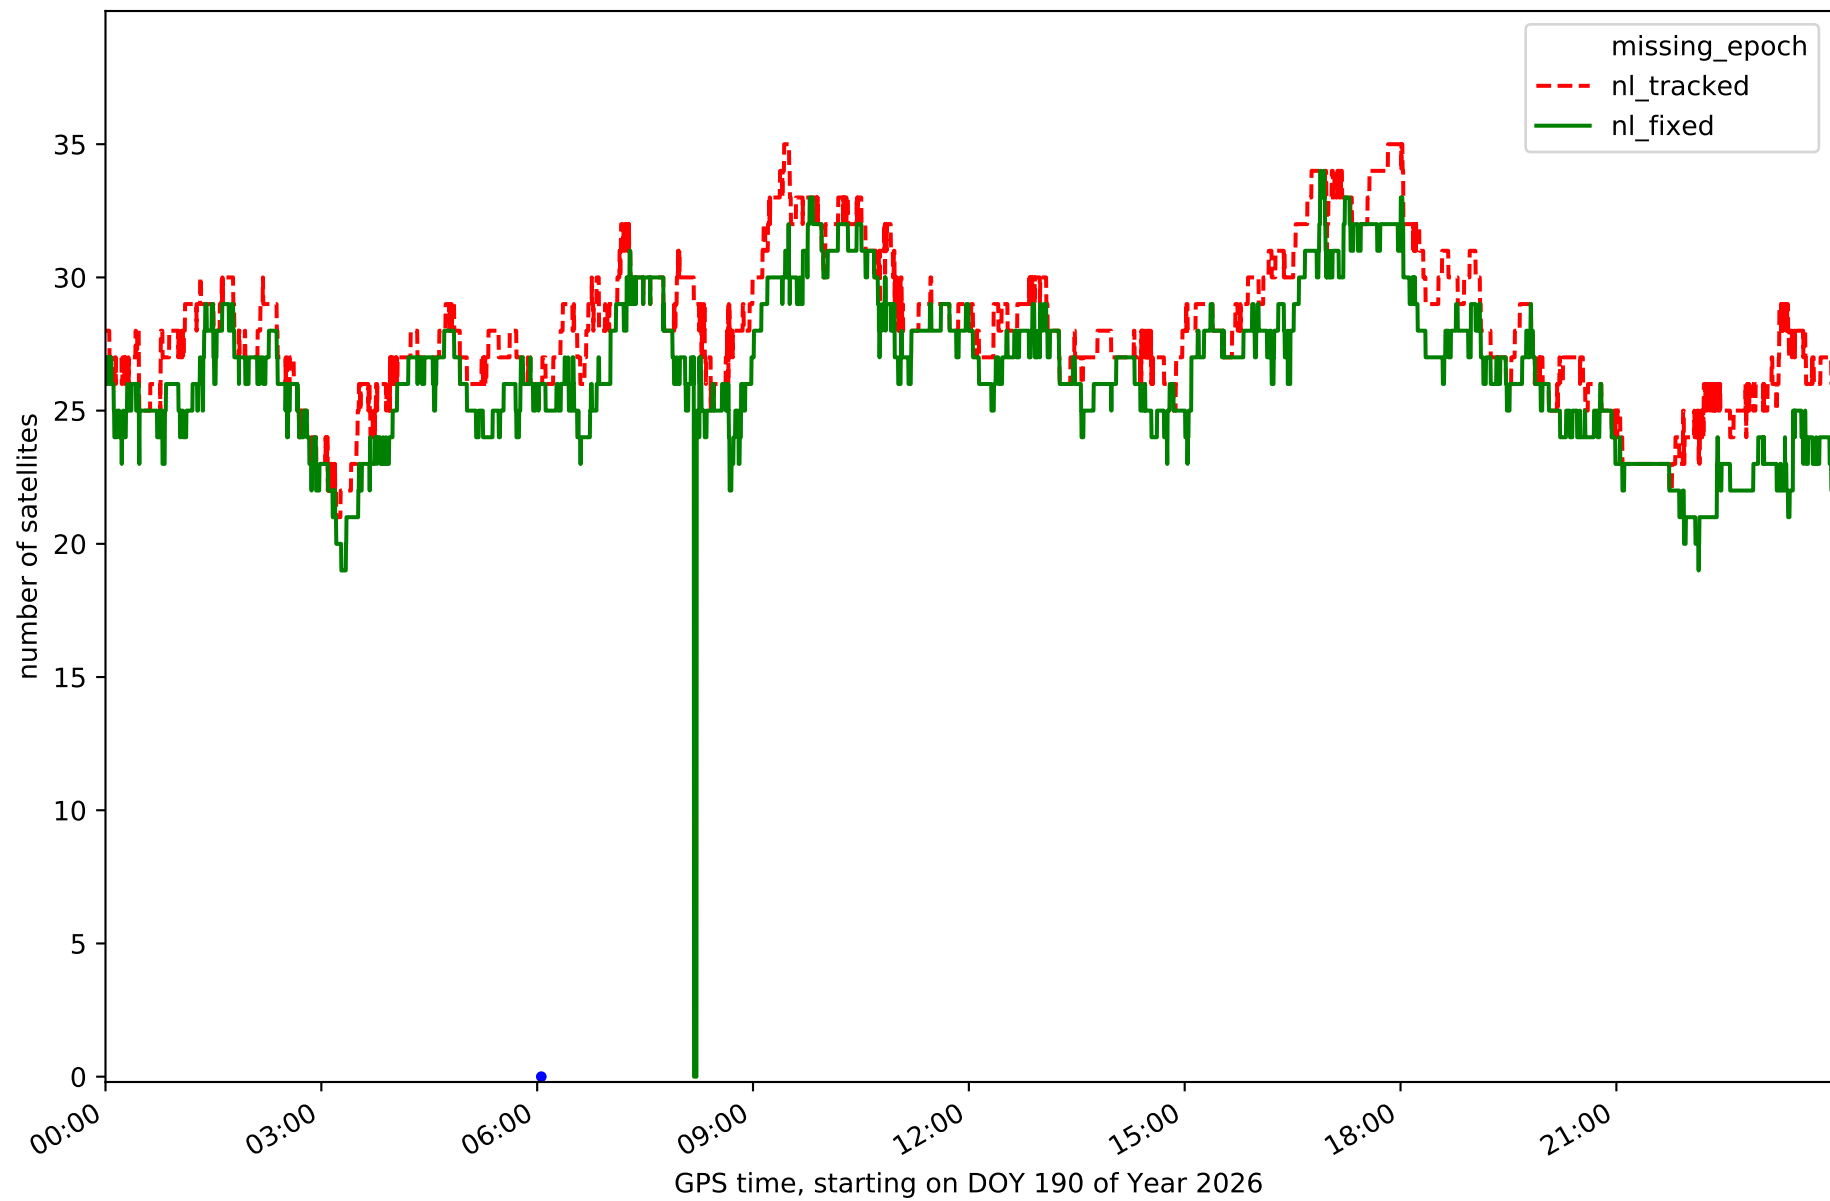


Station LRES in network N32T

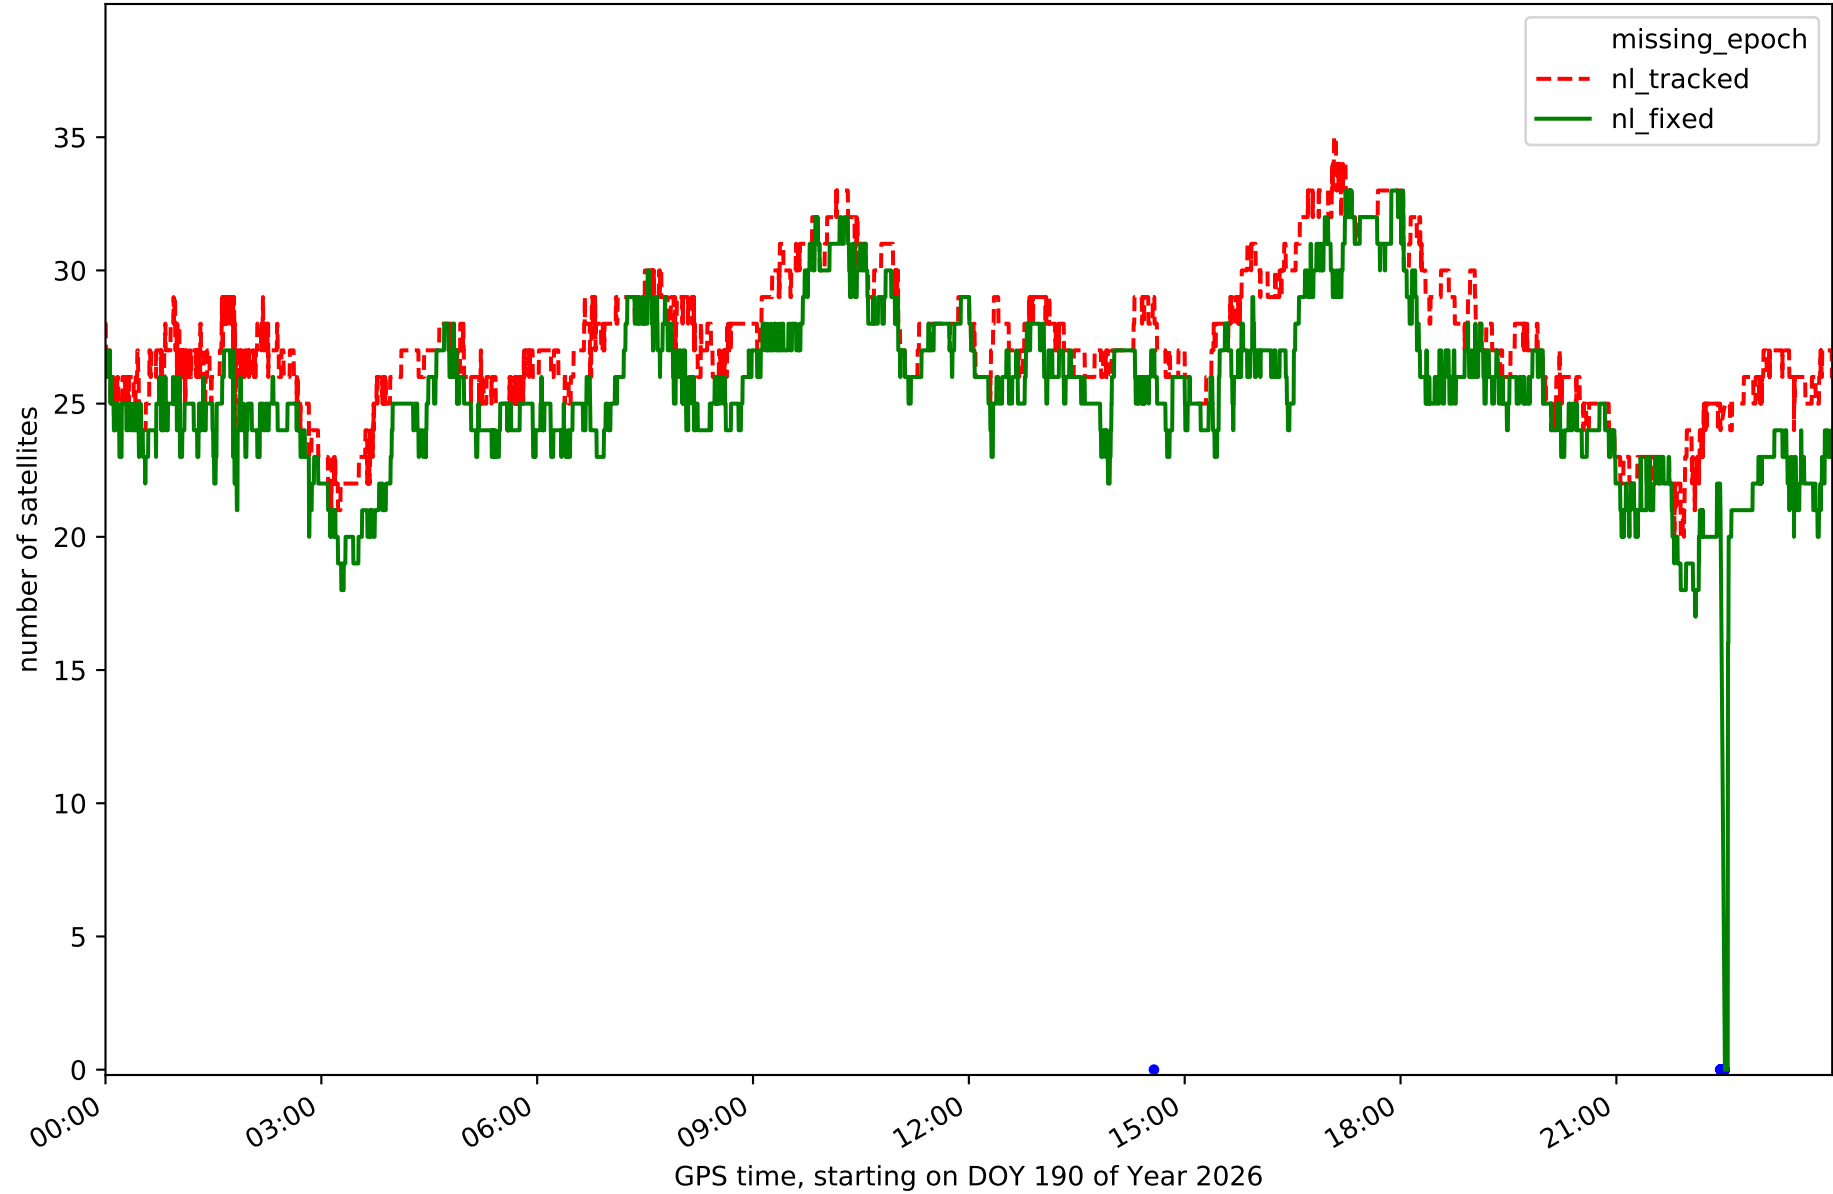


Station TN01 in network N32T

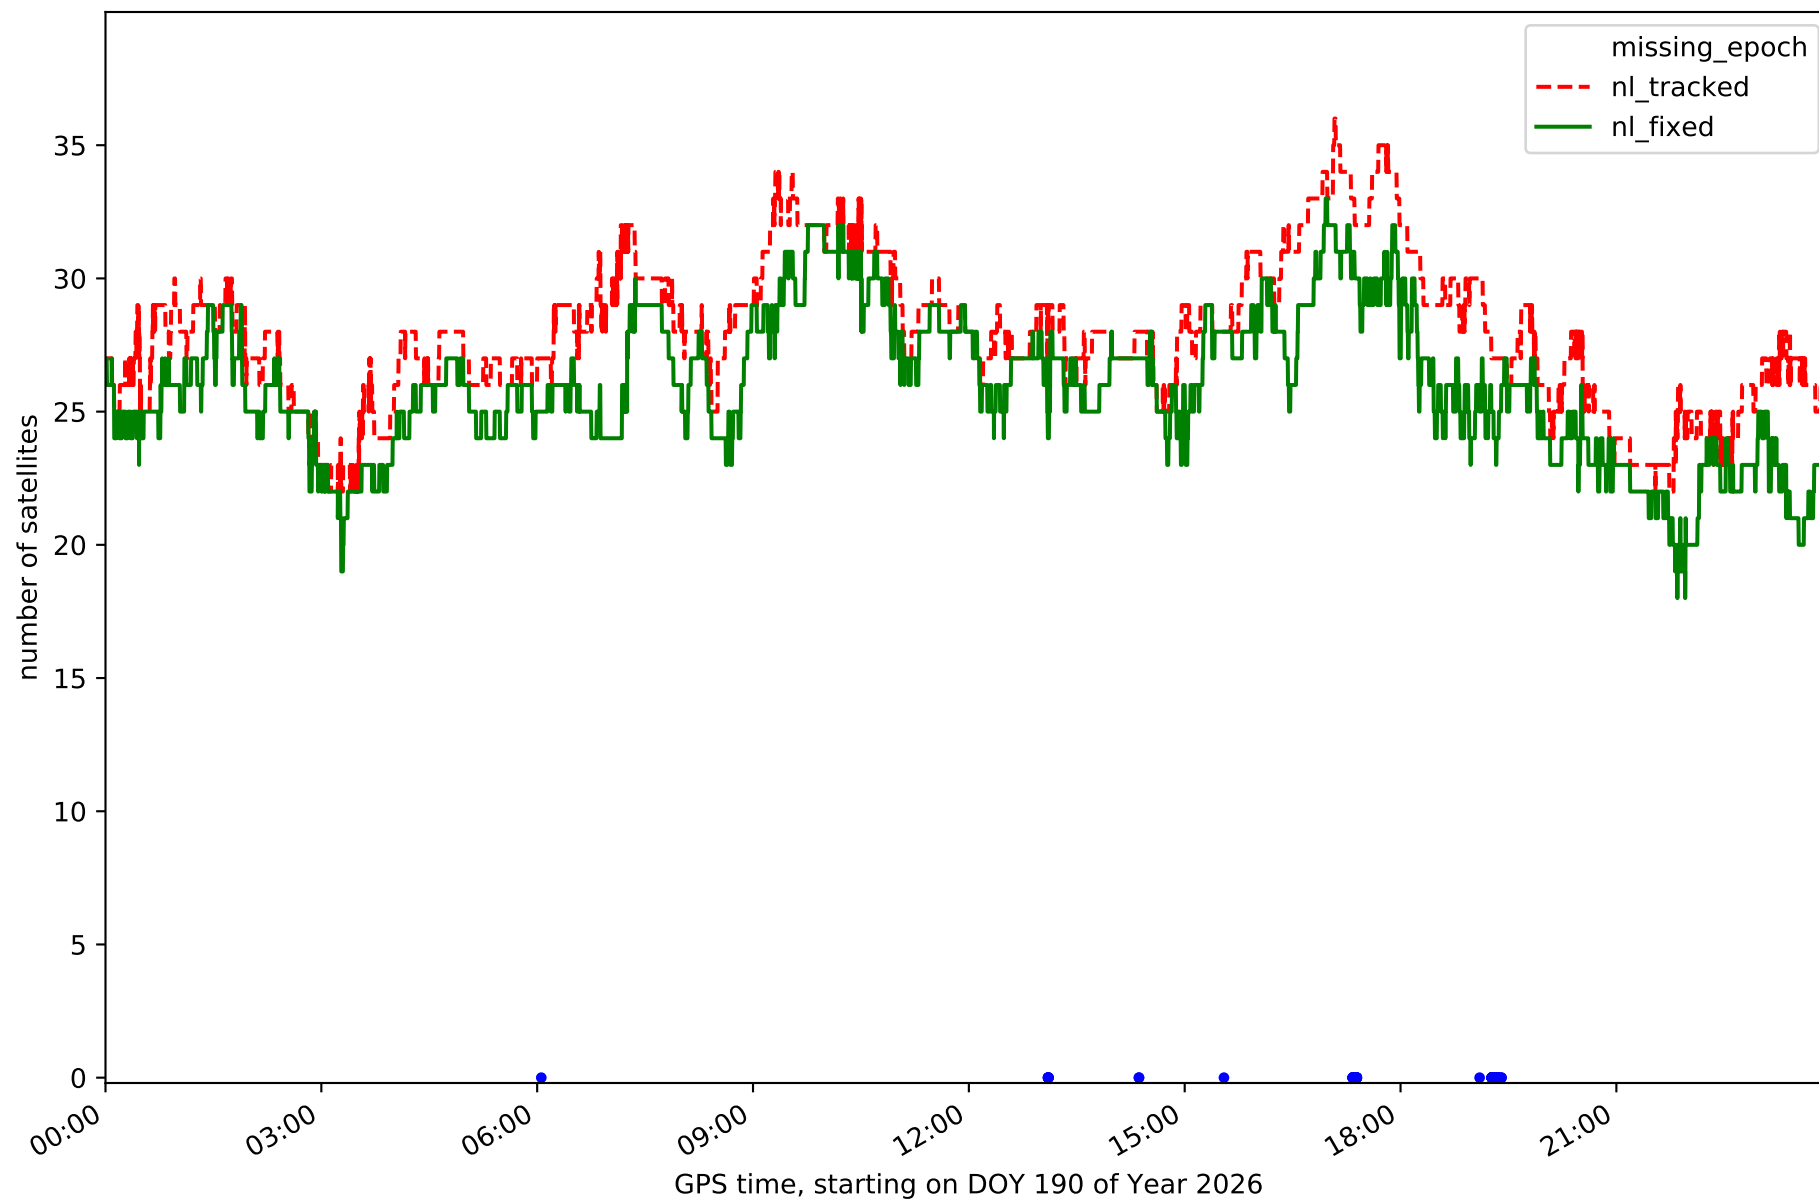


Station TN02 in network N32T

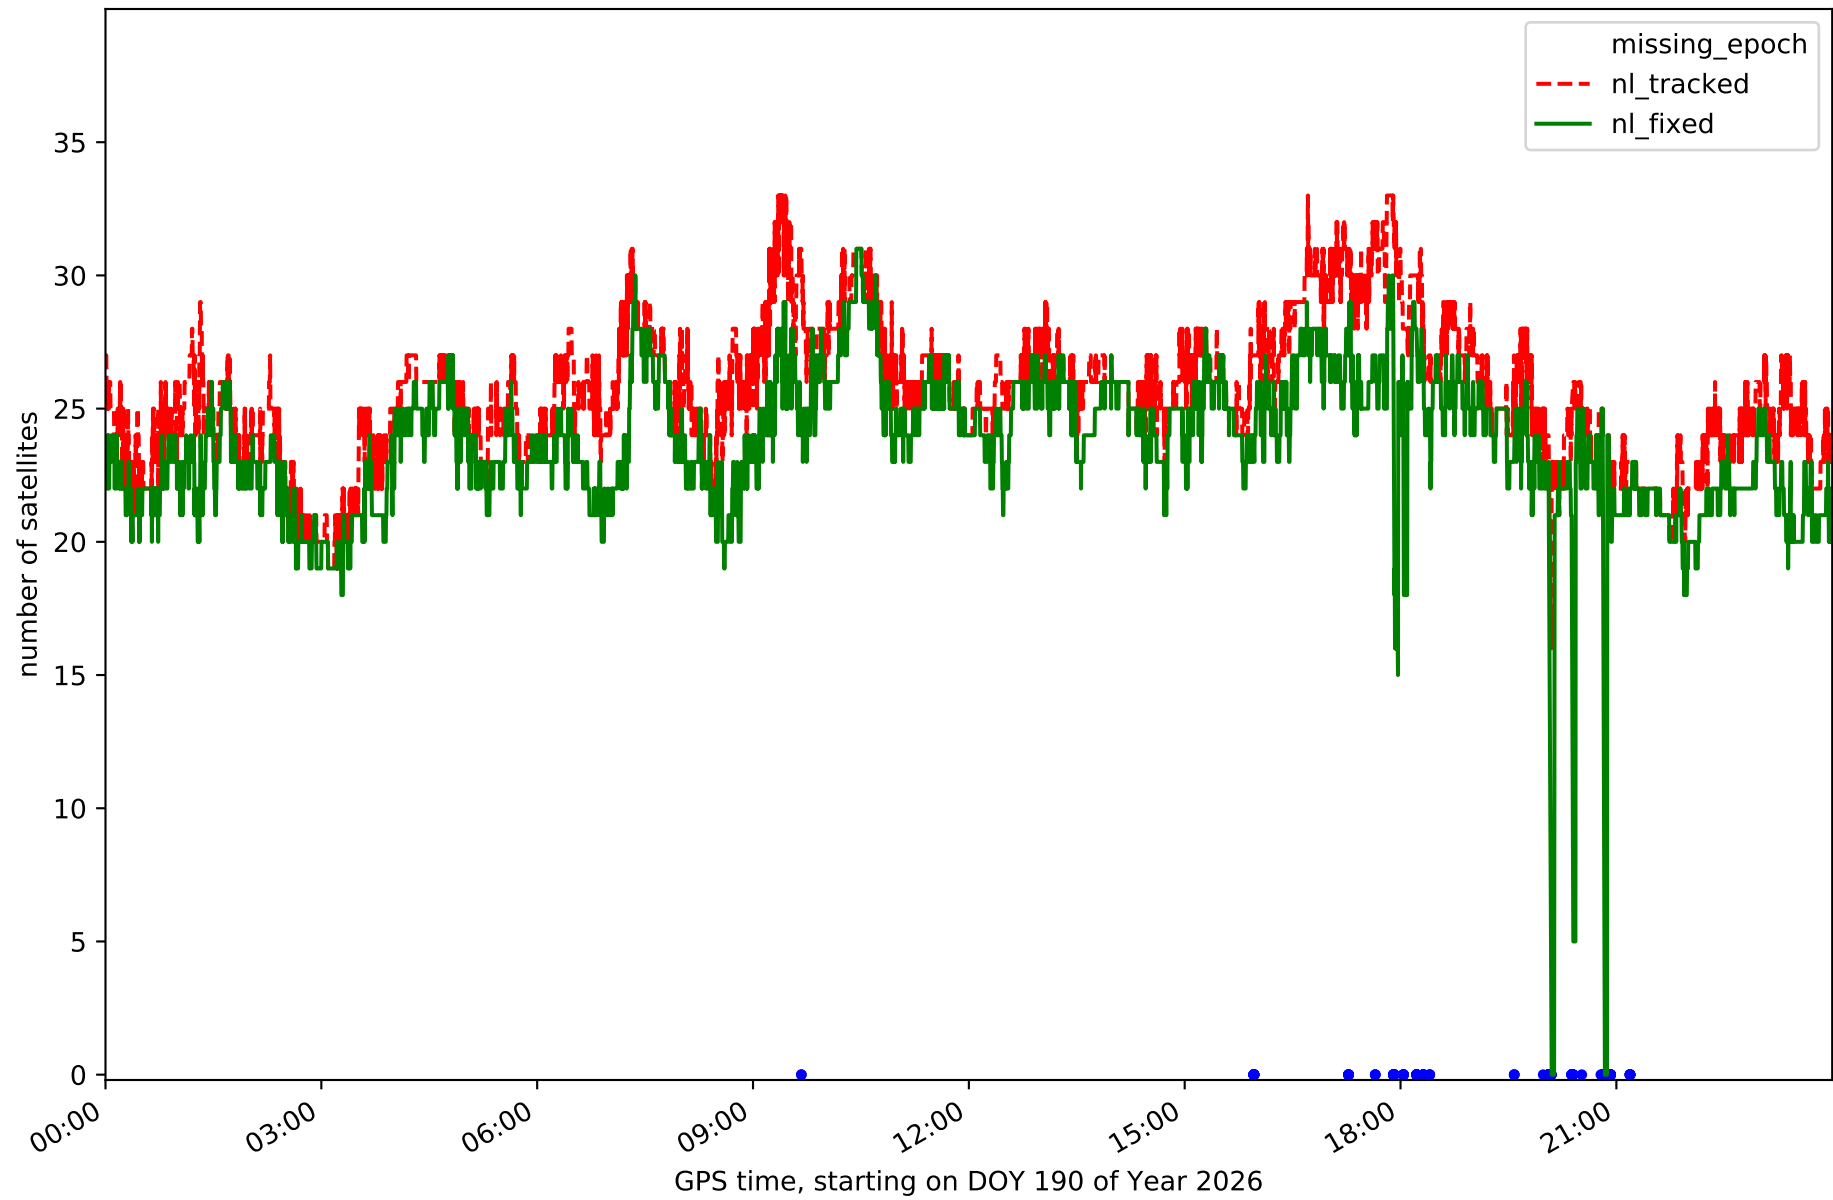


Station TN03 in network N32T

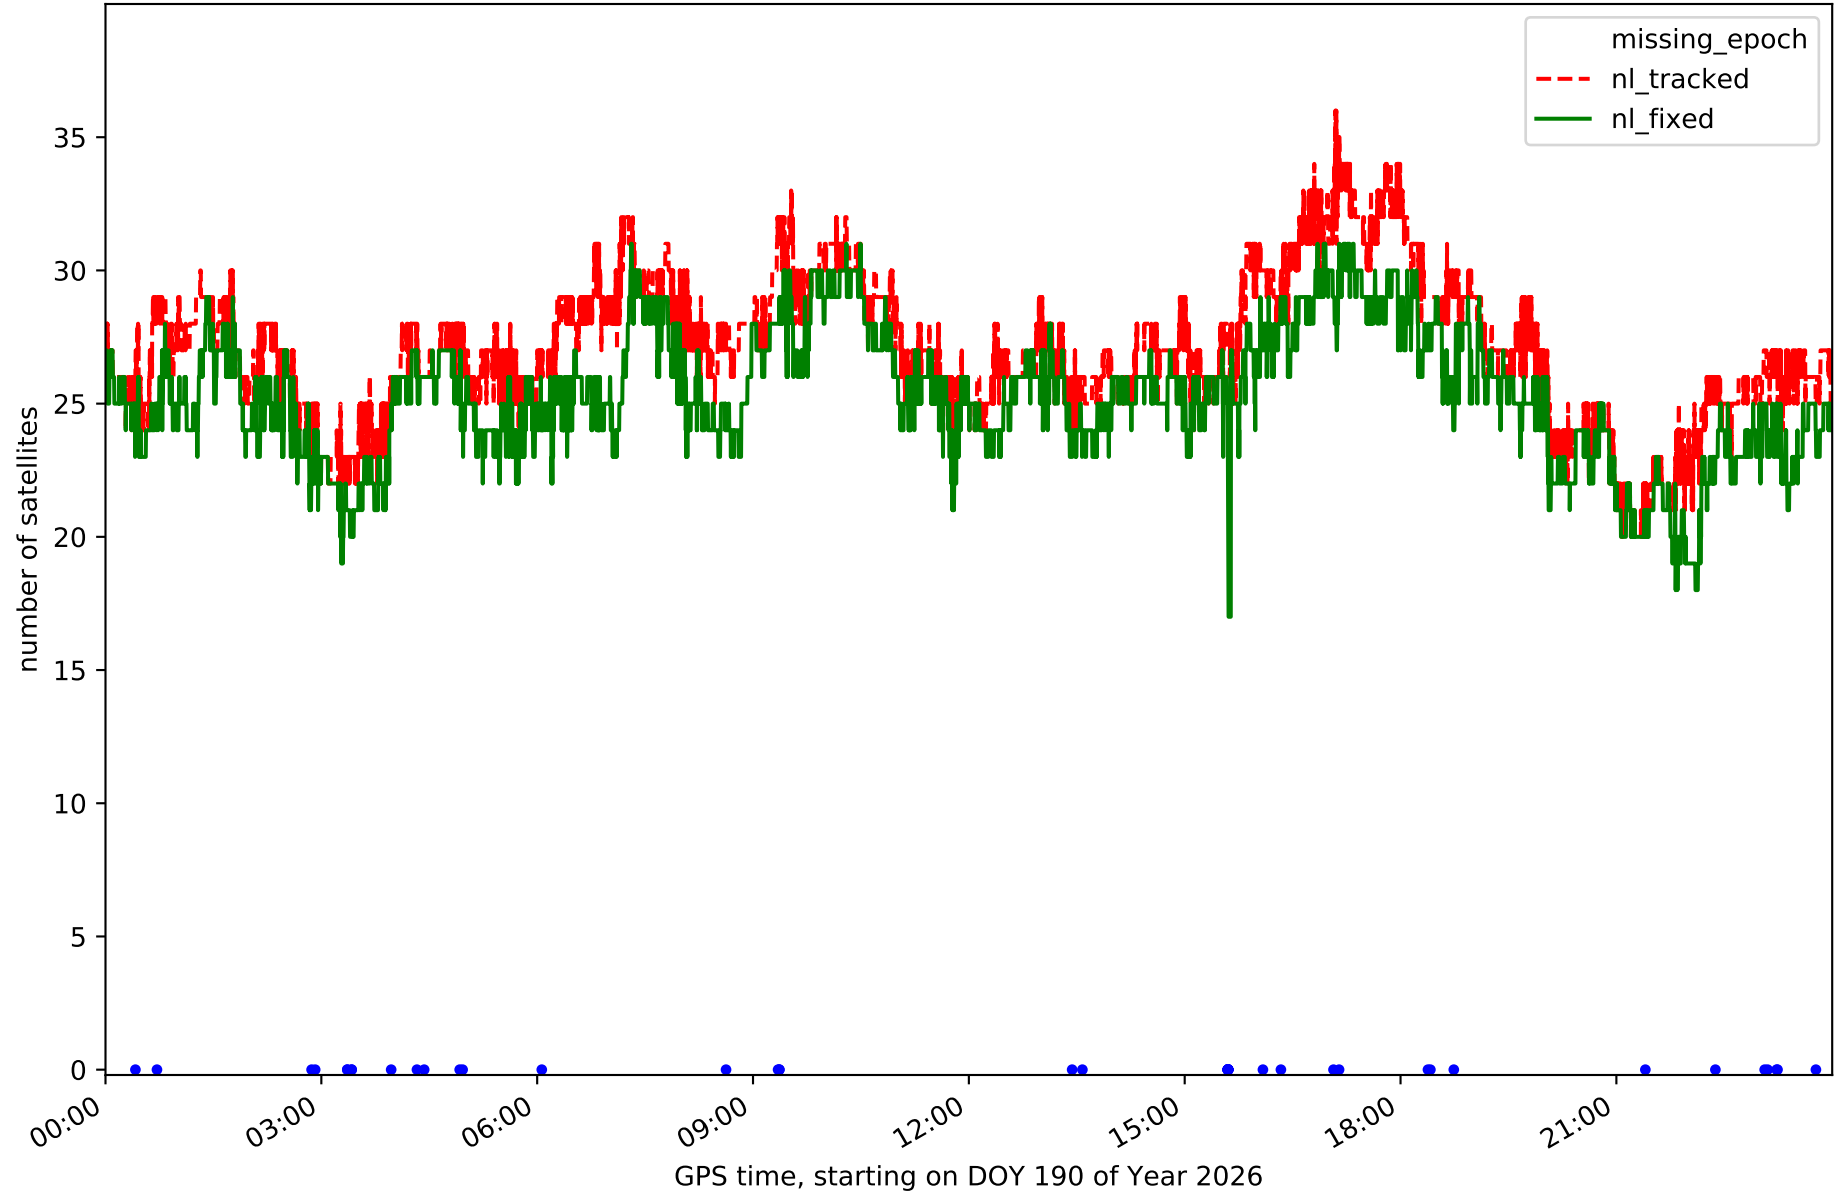


Station TN06 in network N32T

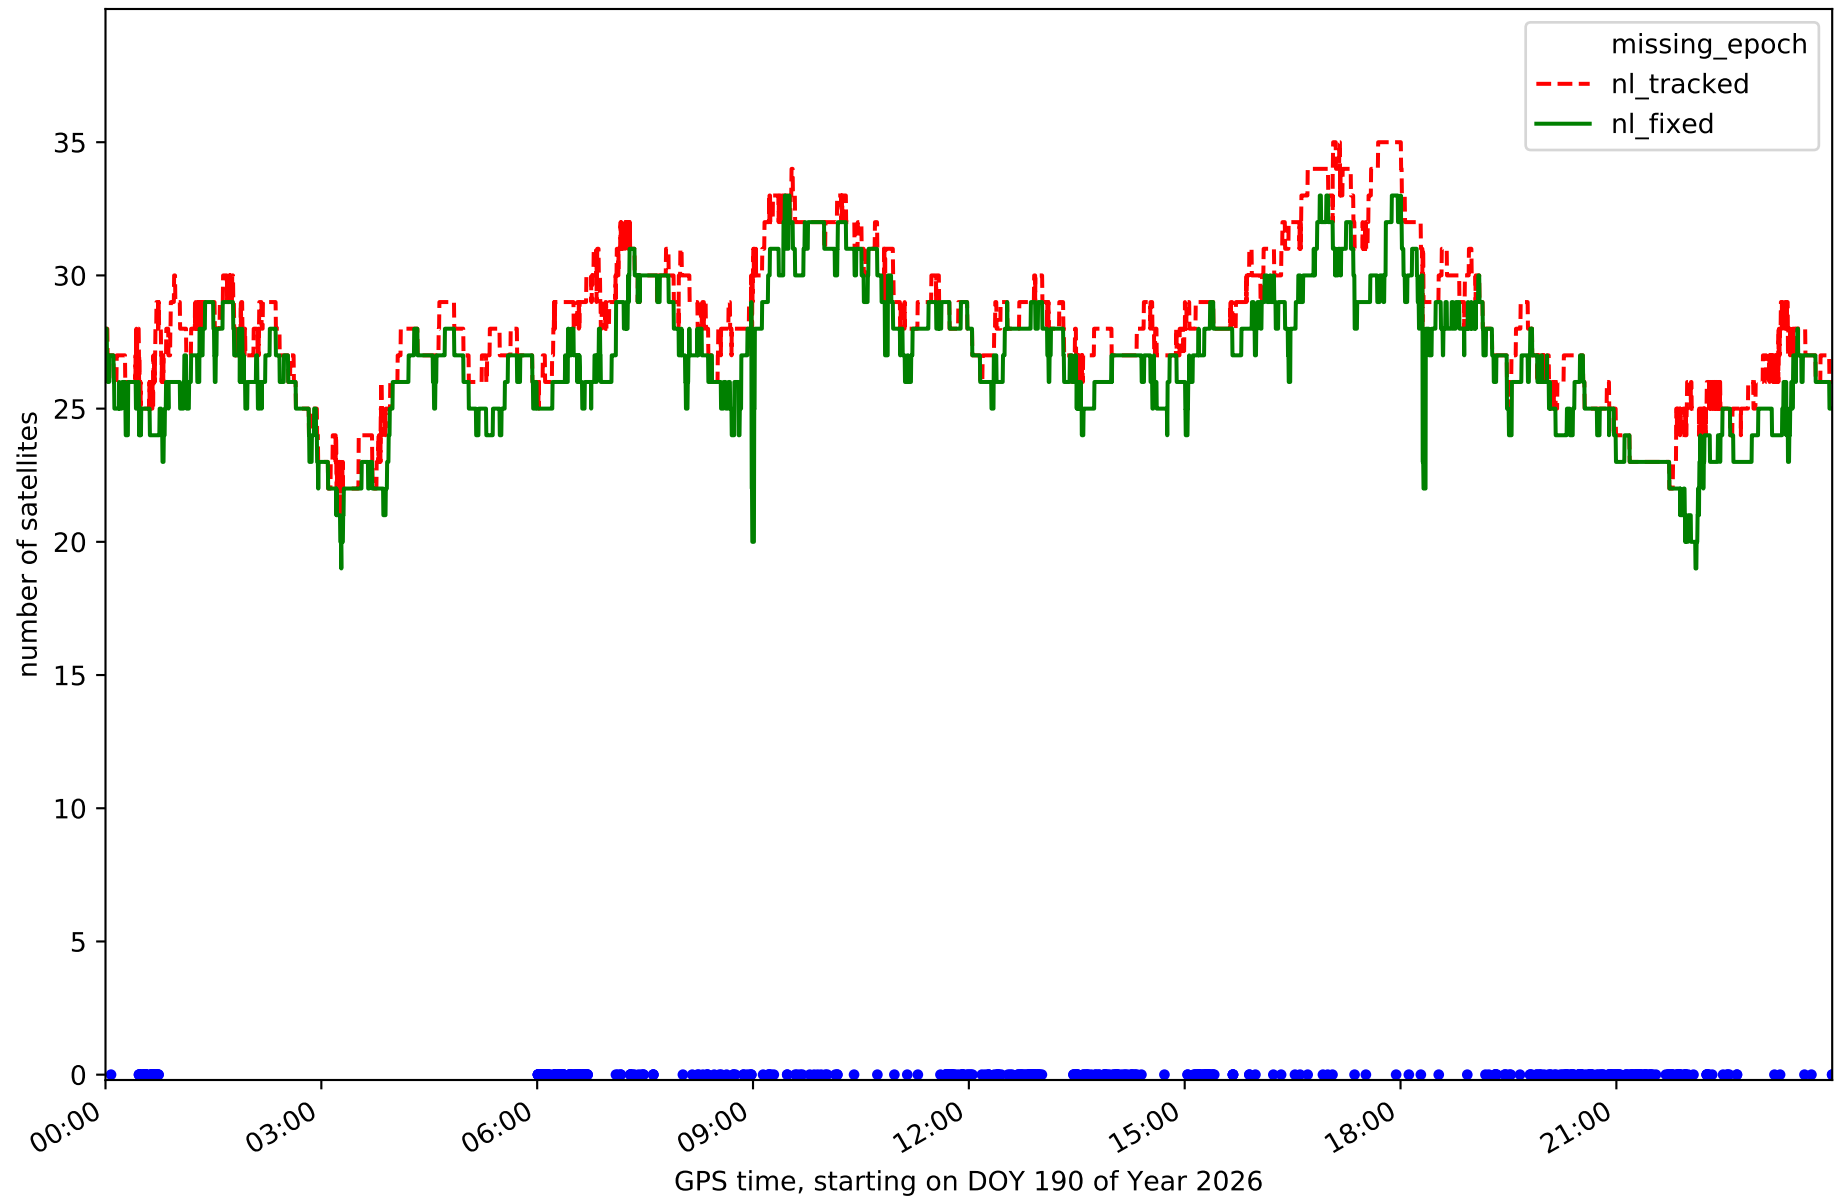


Station TN09 in network N32T

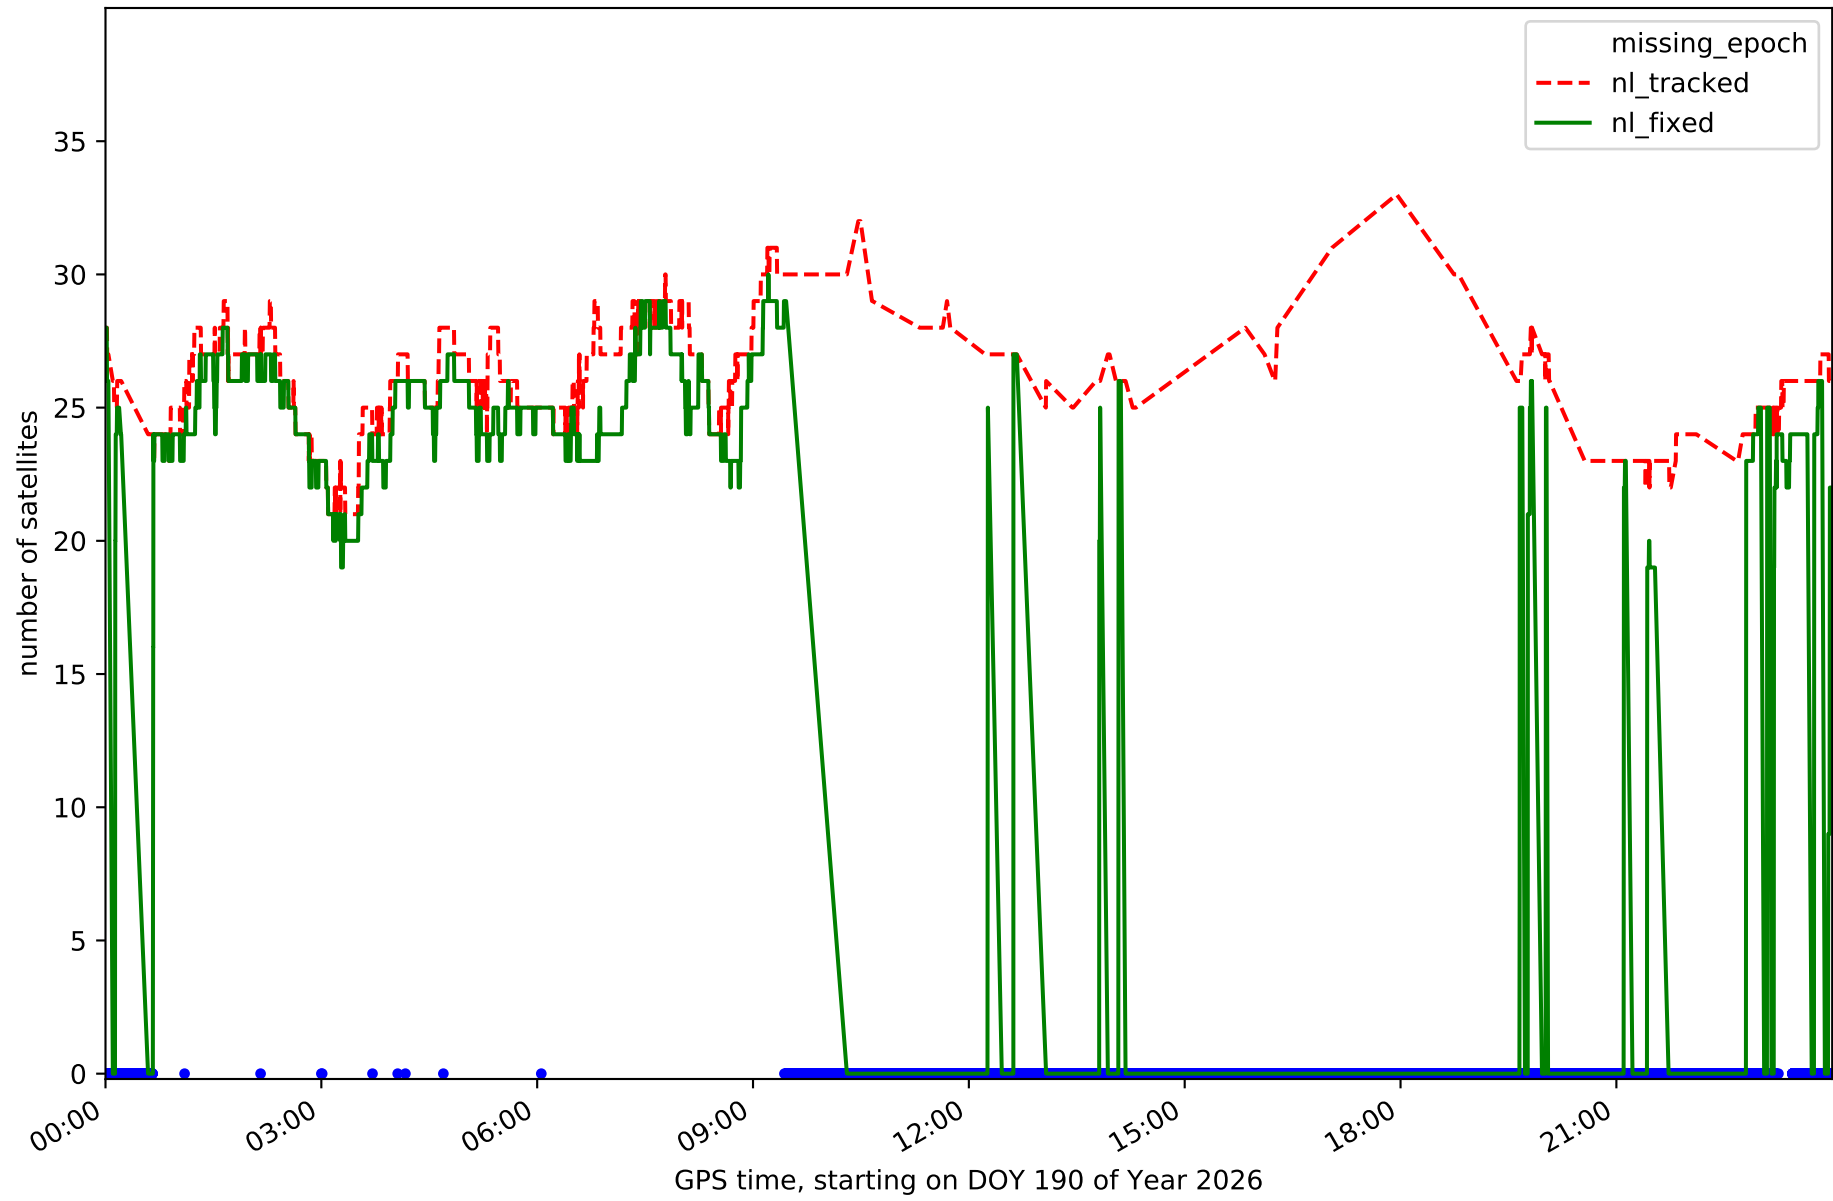


Station TE11 in network N32T

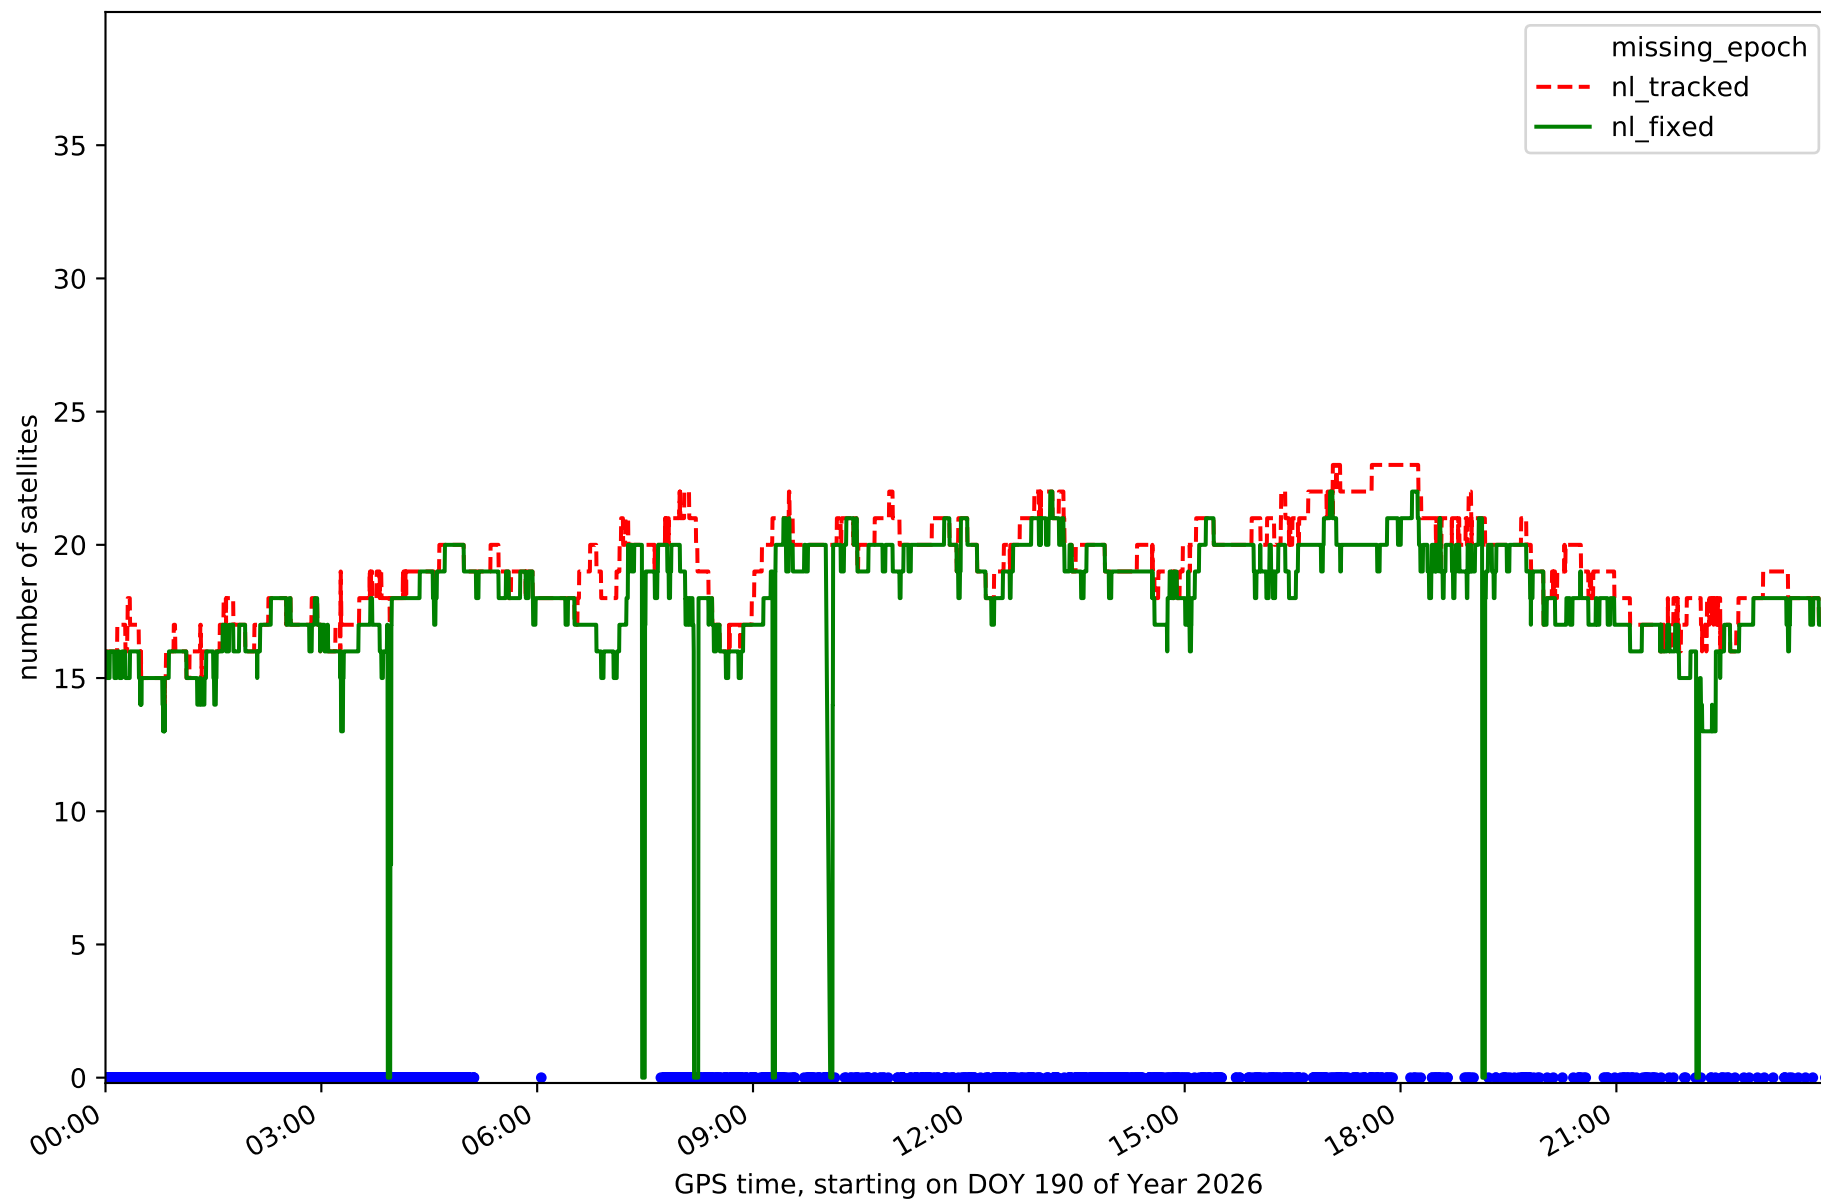


RefCheck for station EH01 in network N32T

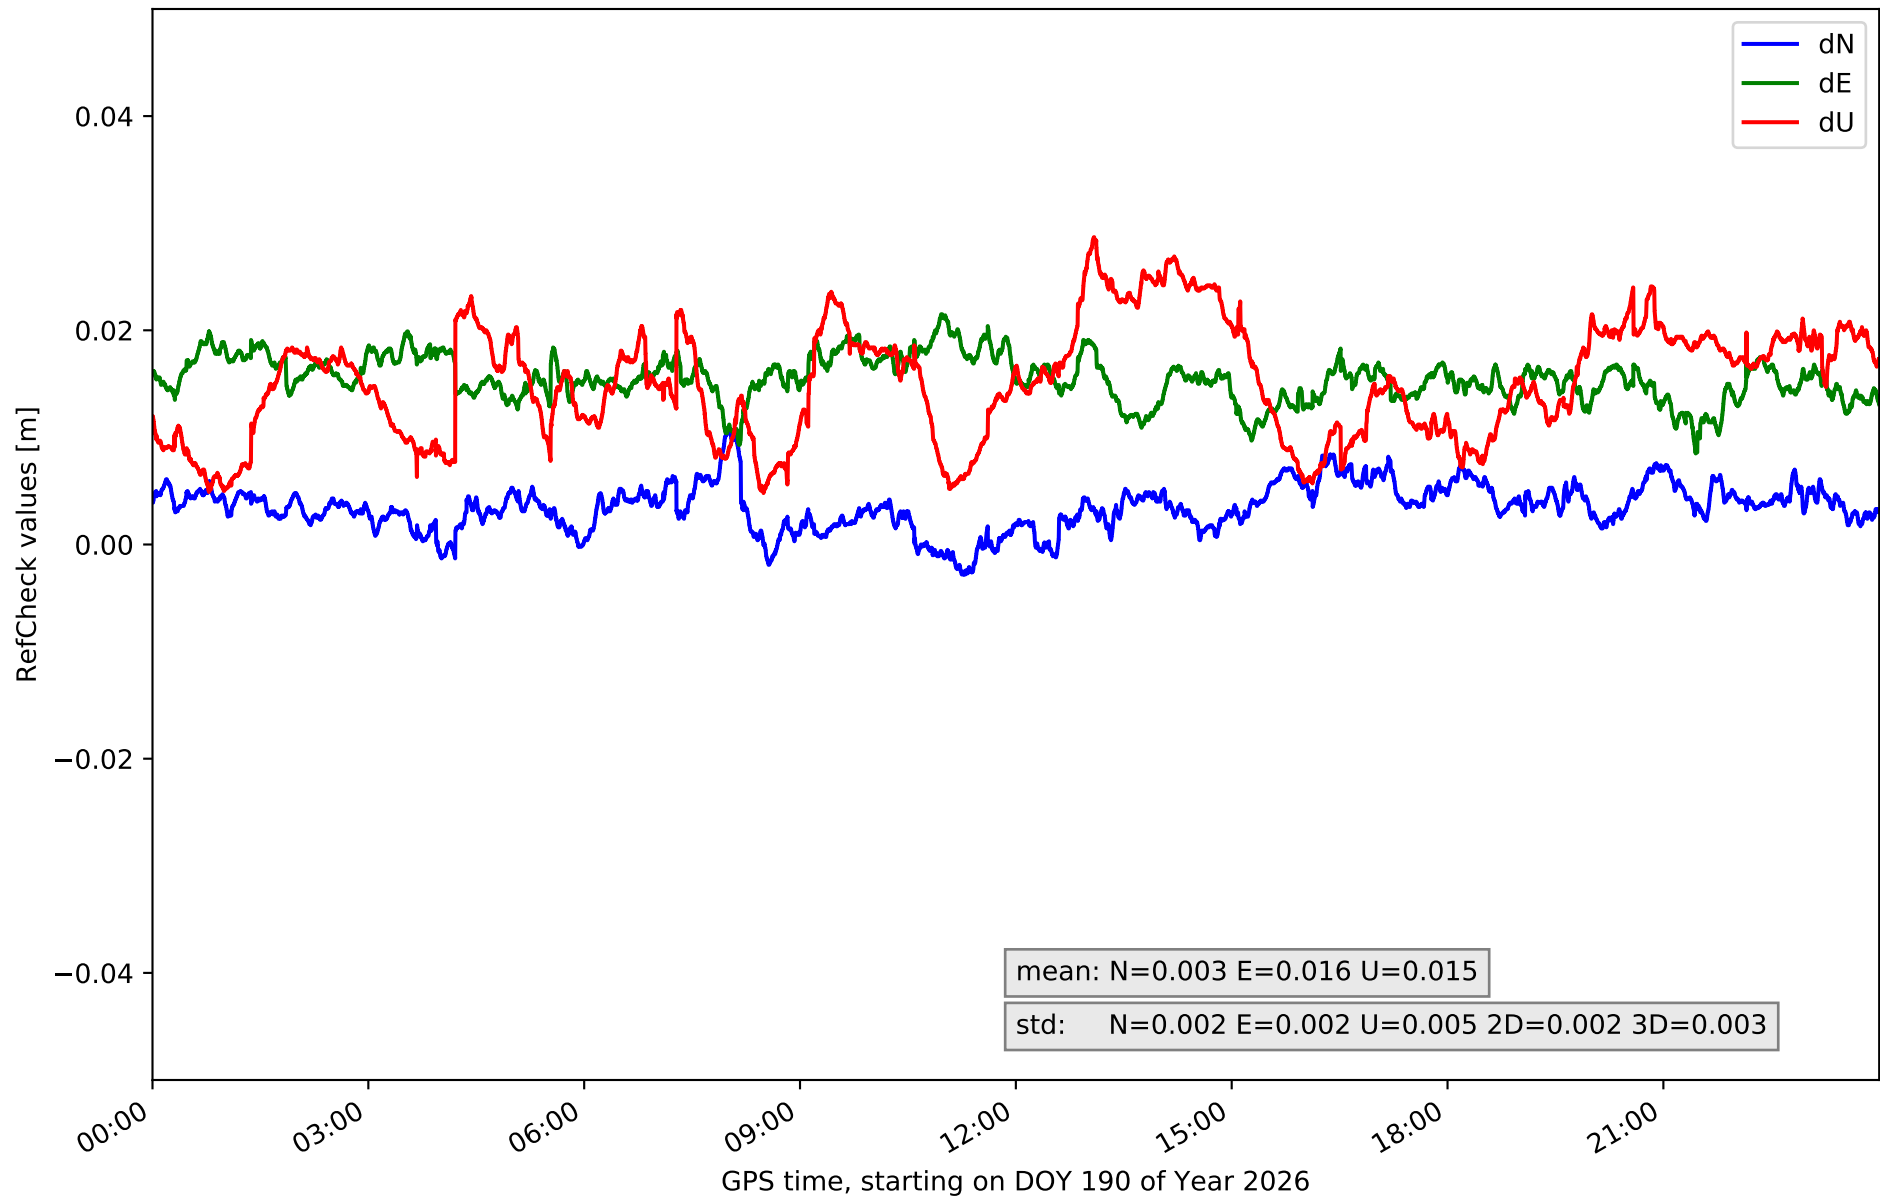


RefCheck for station EH02 in network N32T

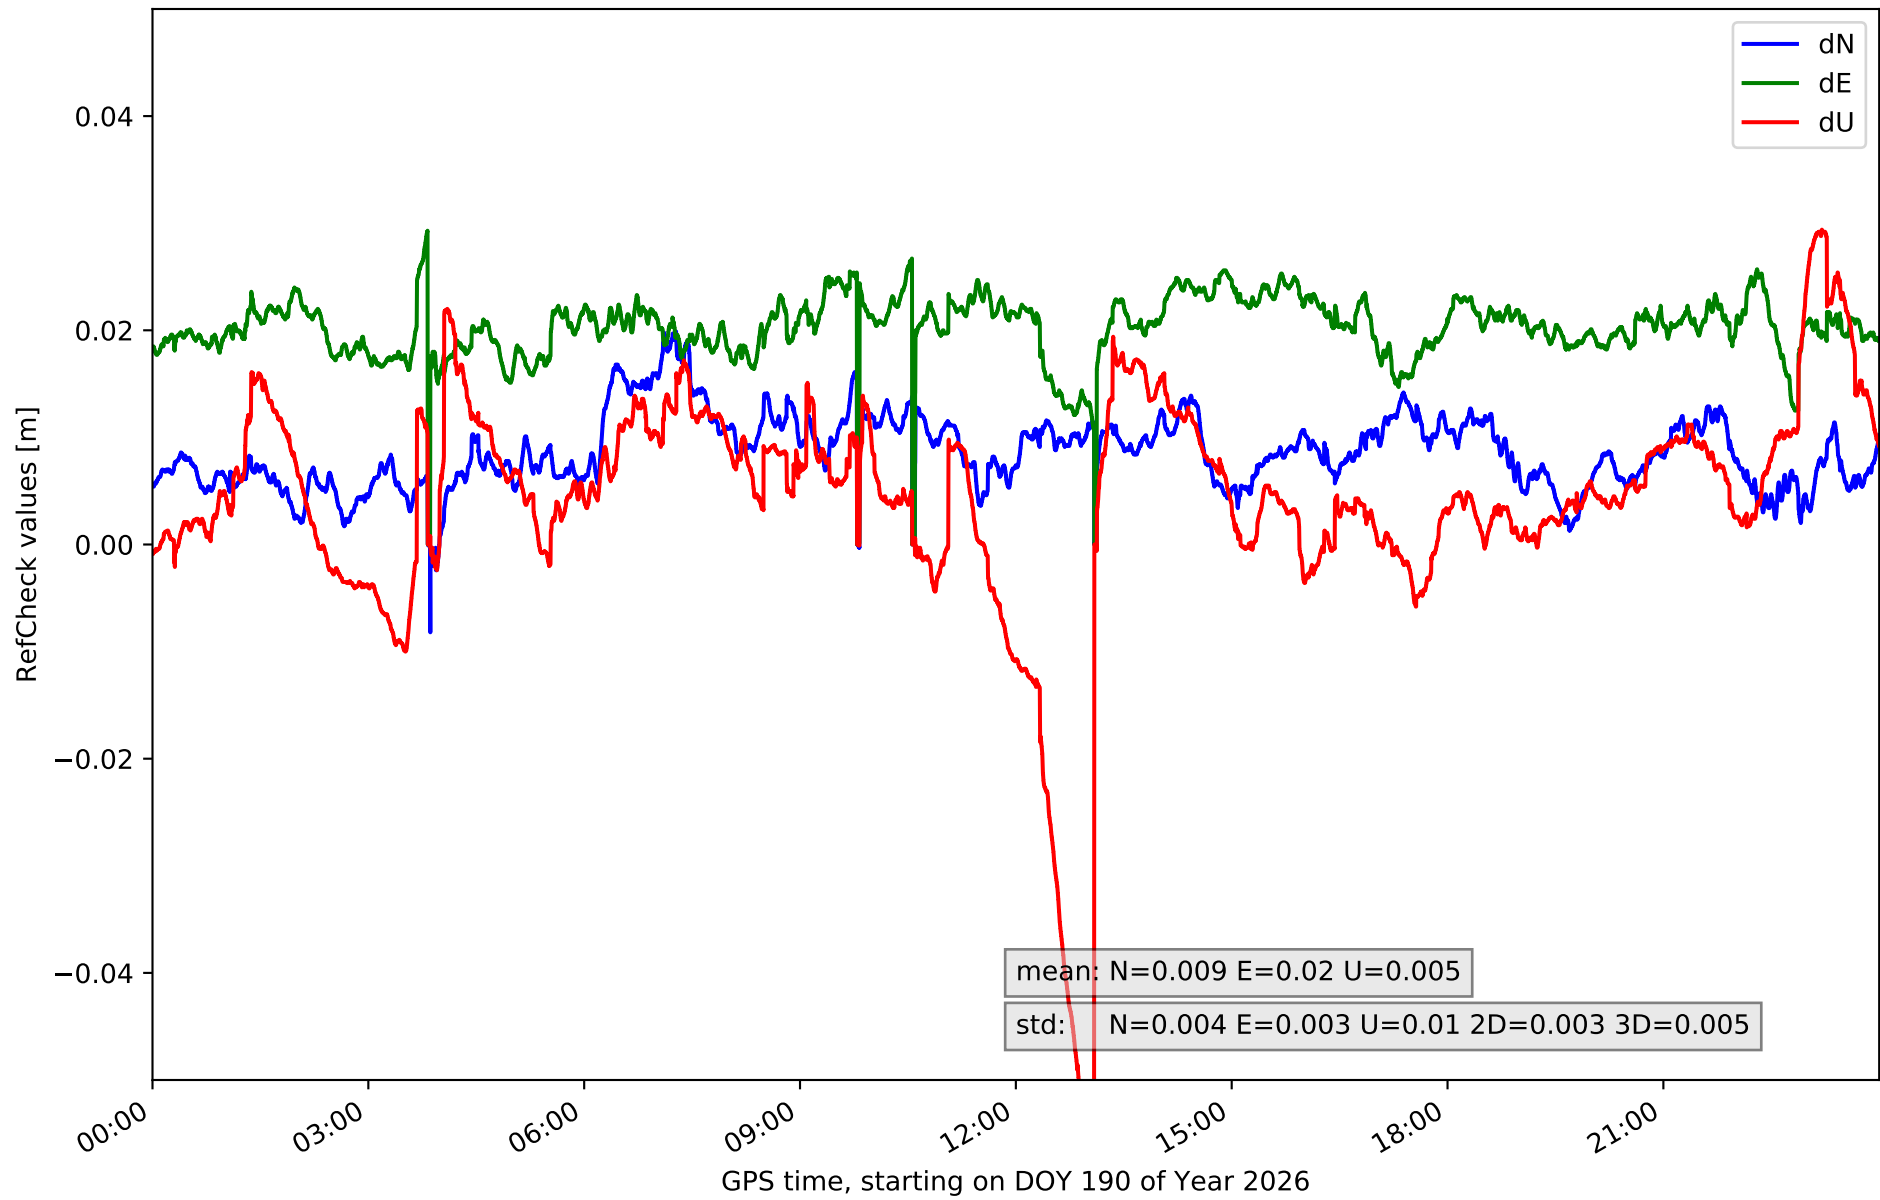


RefCheck for station GOM1 in network N32T

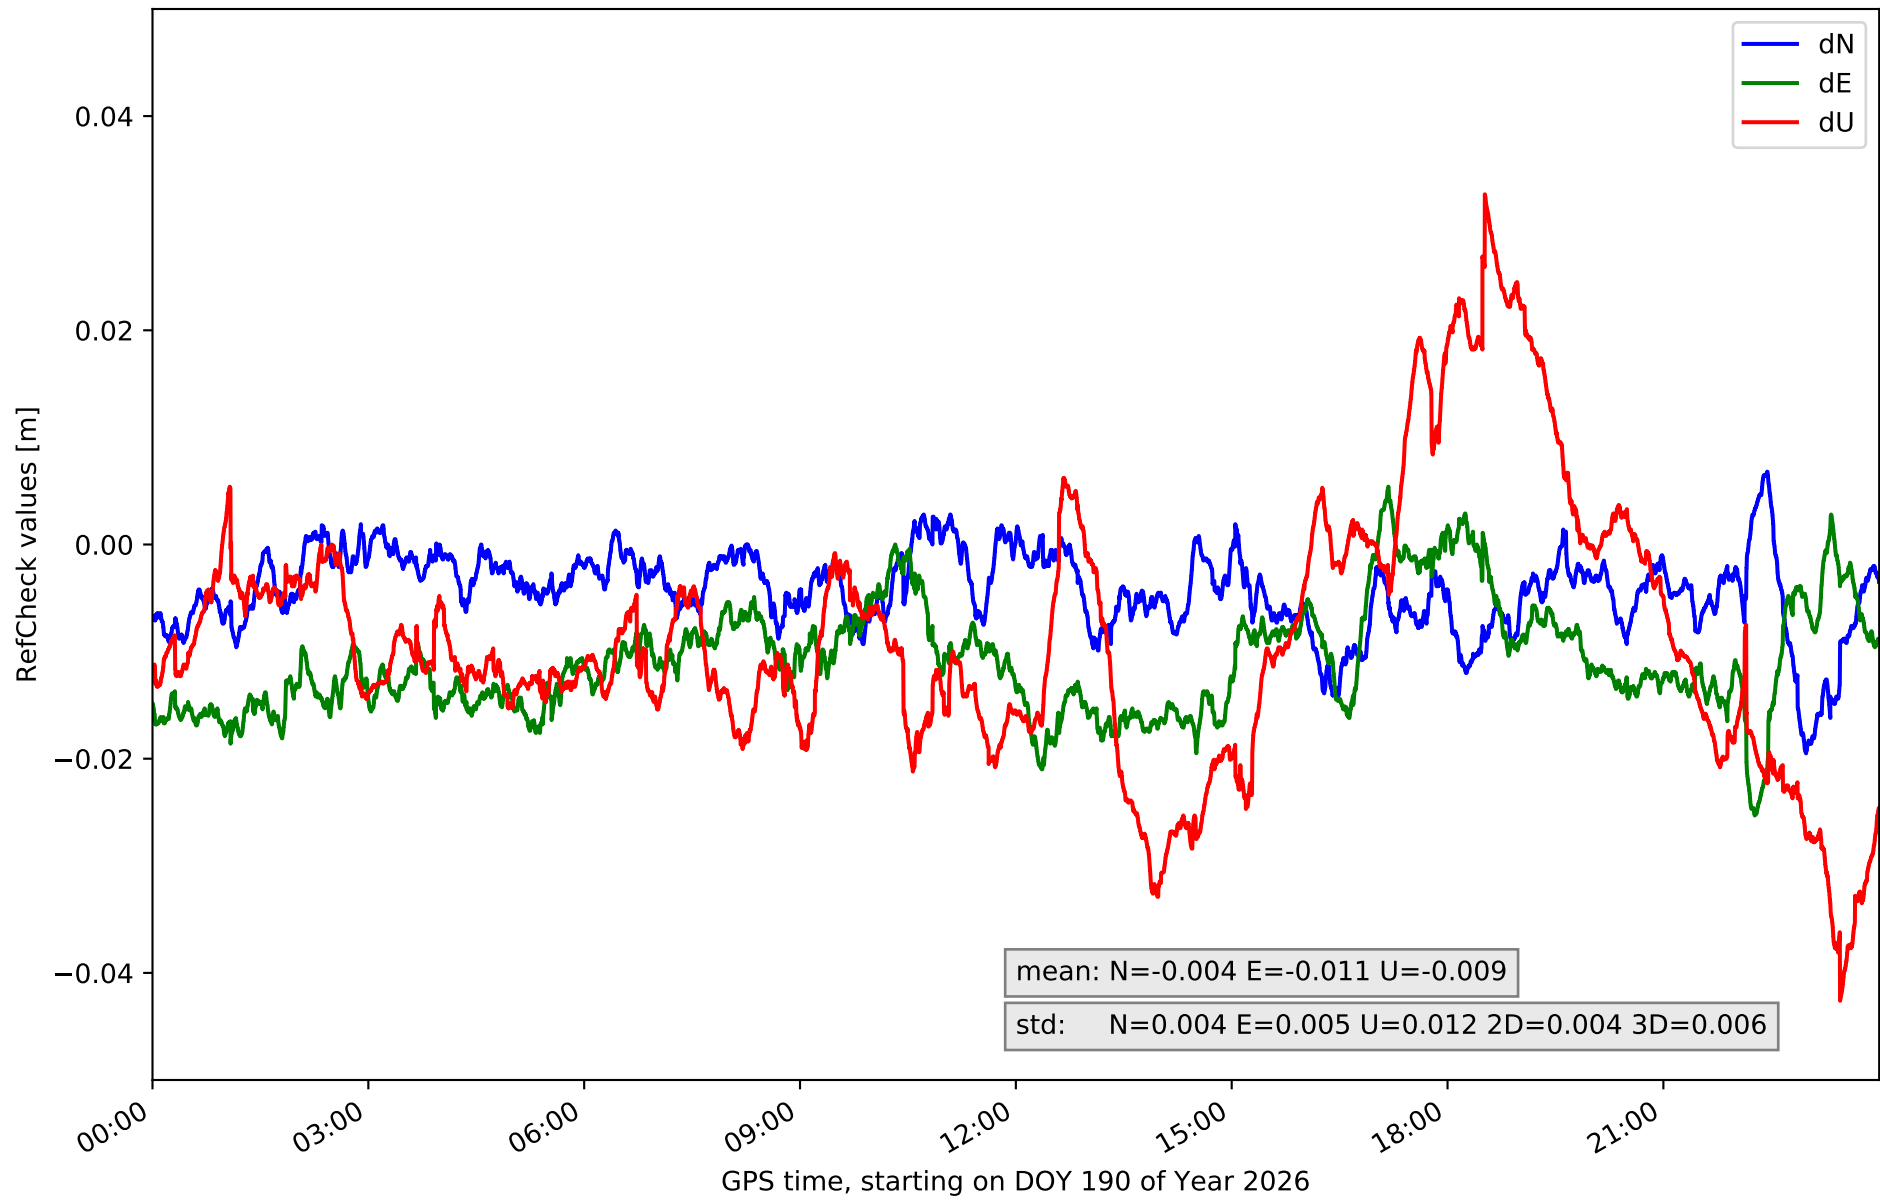


RefCheck for station GOME in network N32T

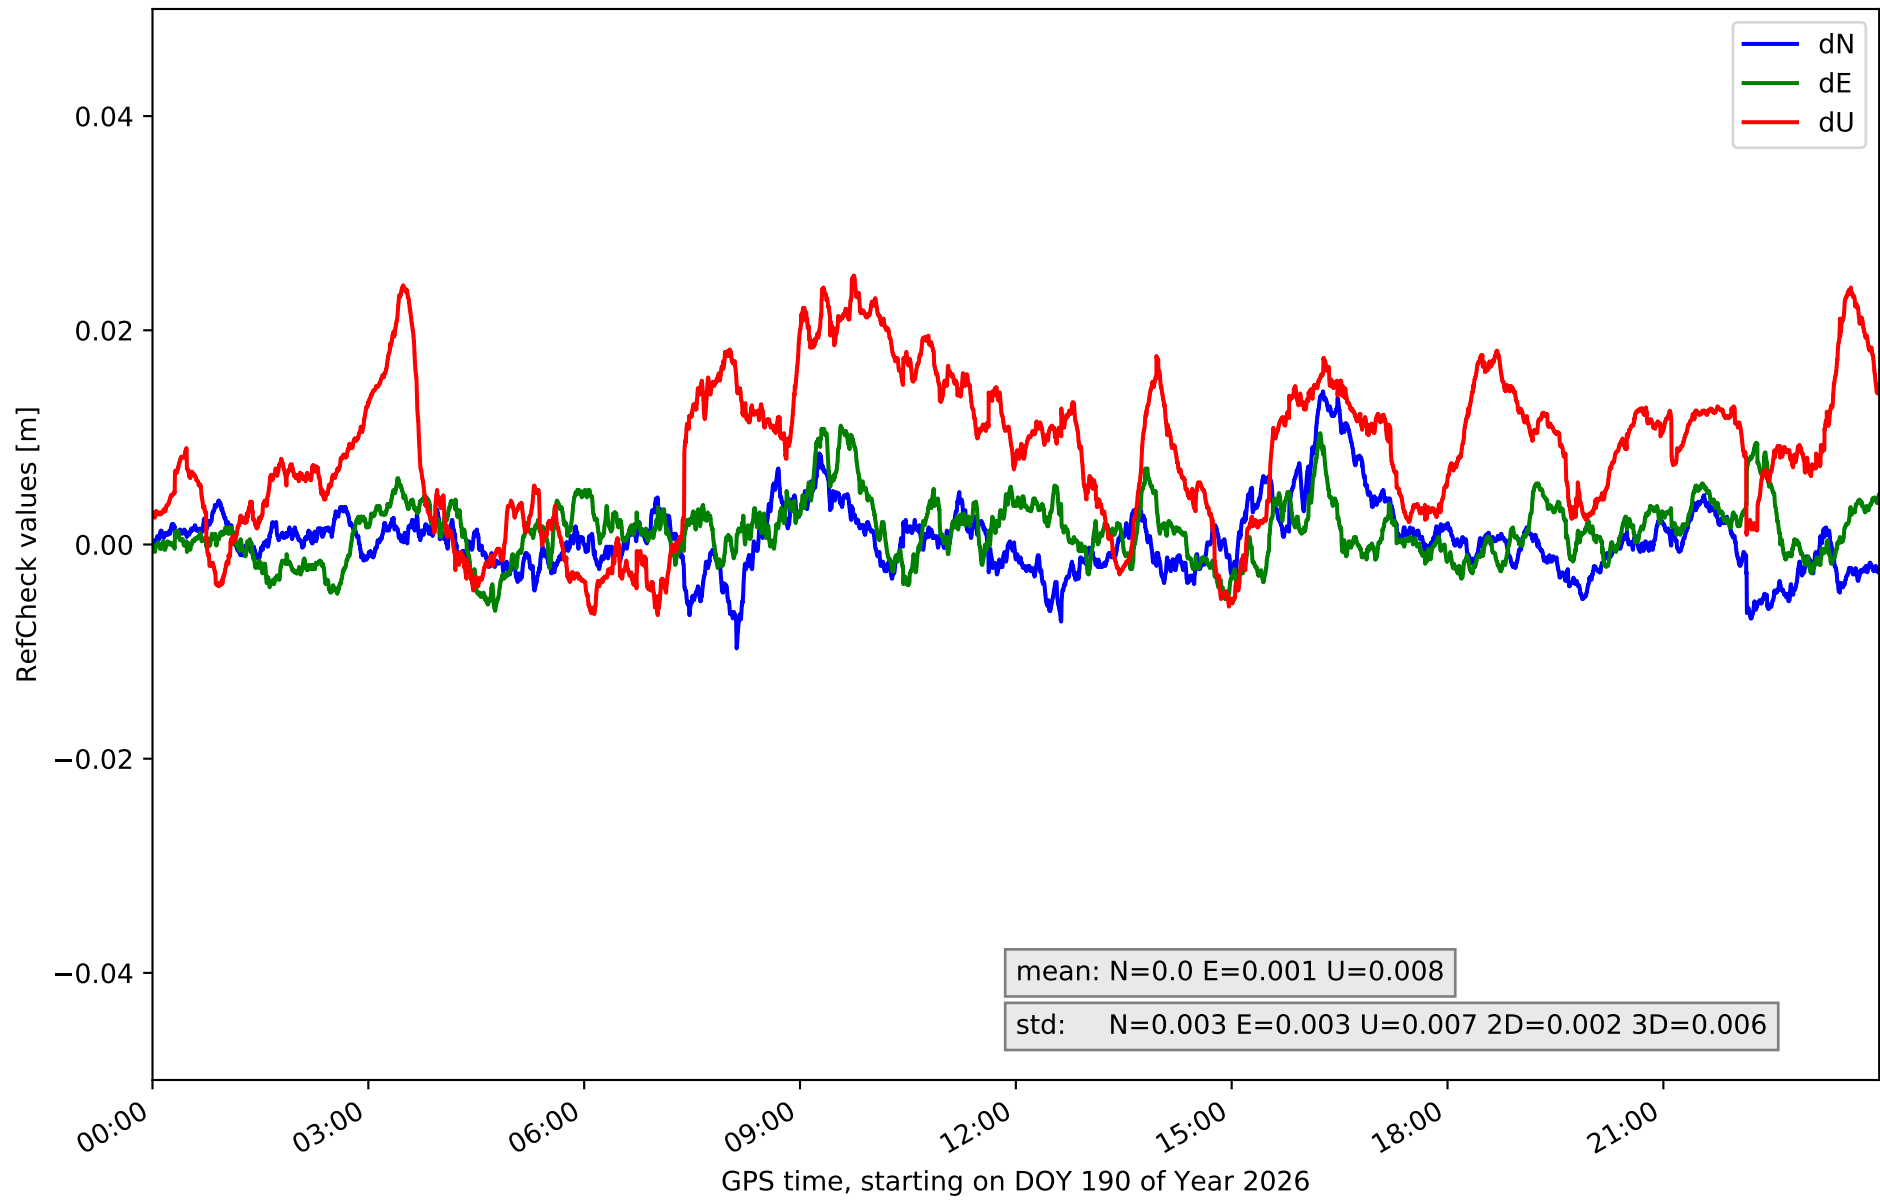


RefCheck for station IZAN in network N32T

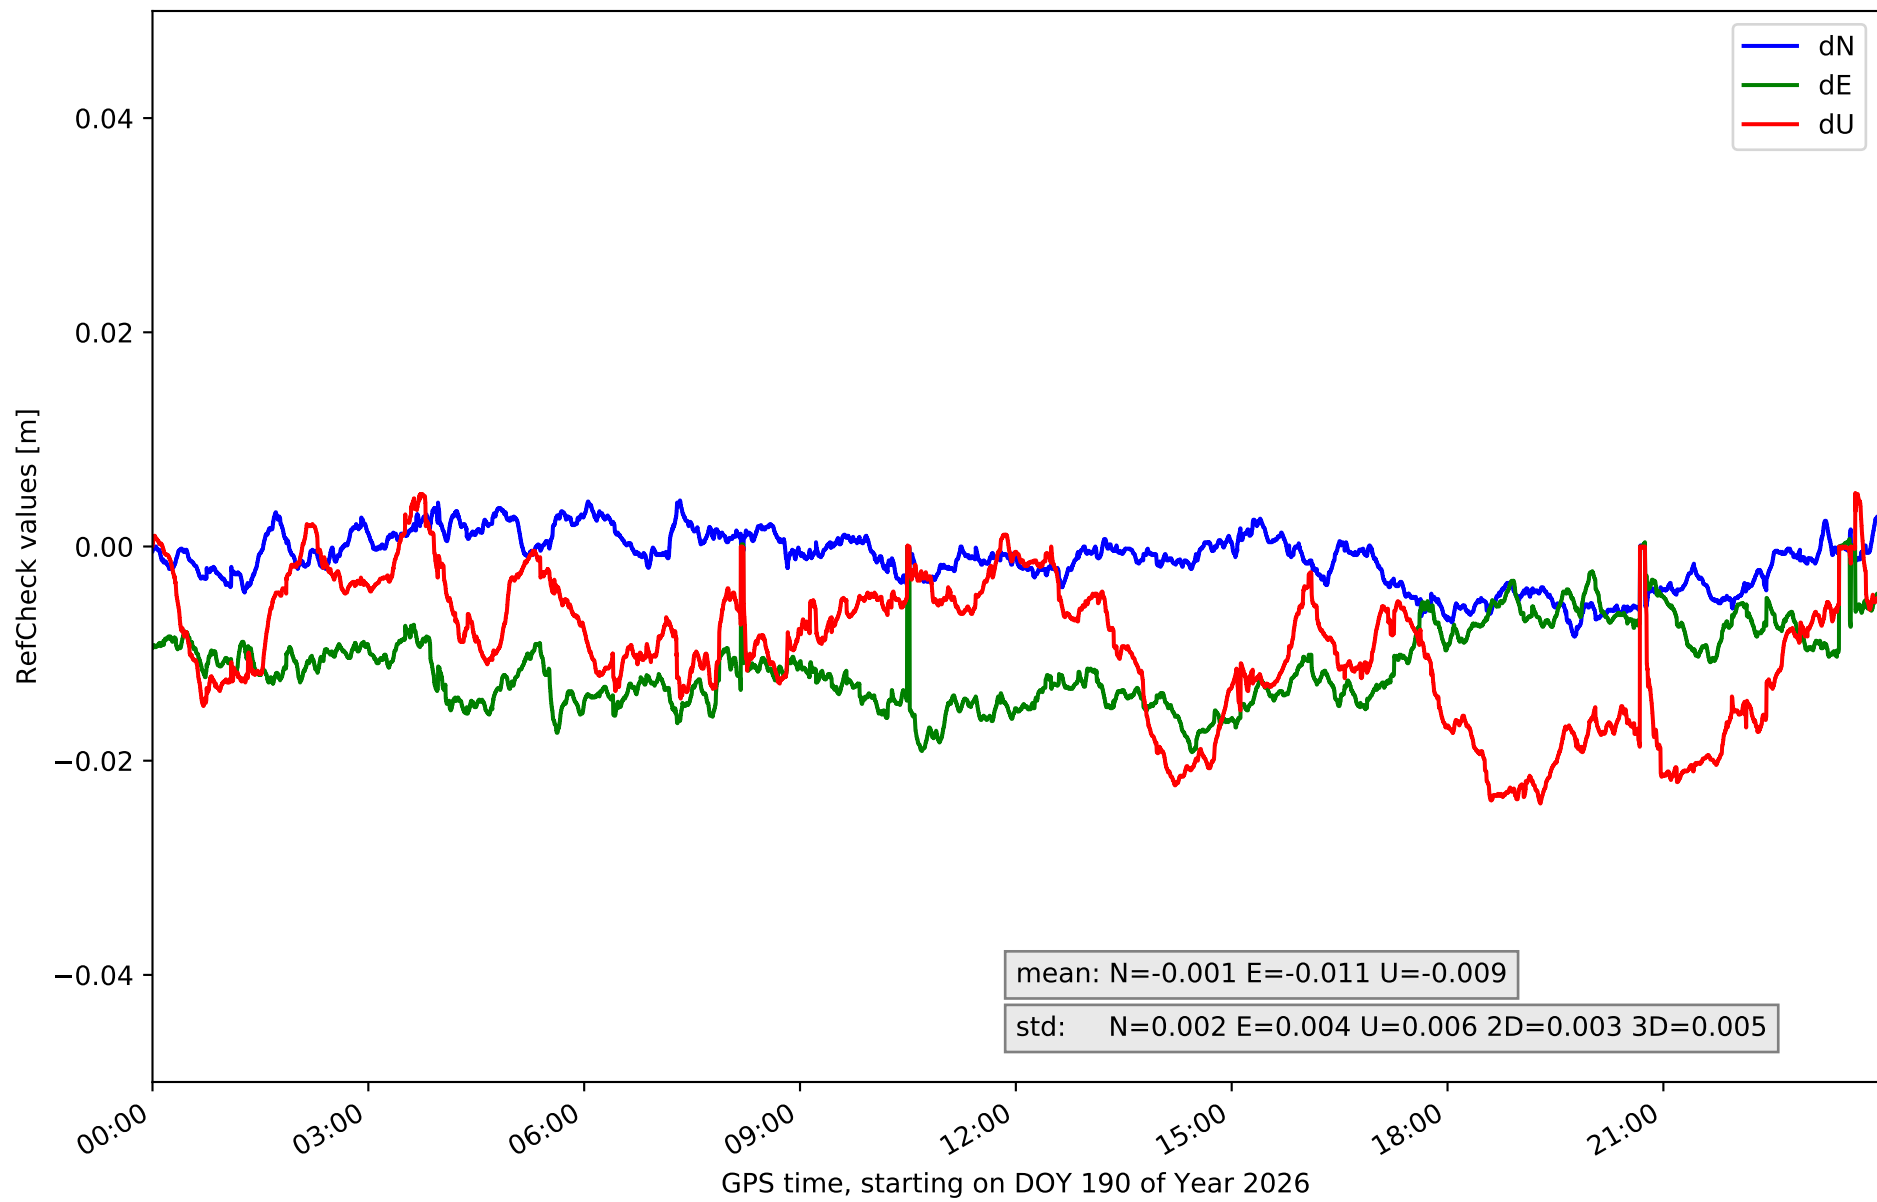


RefCheck for station LP01 in network N32T

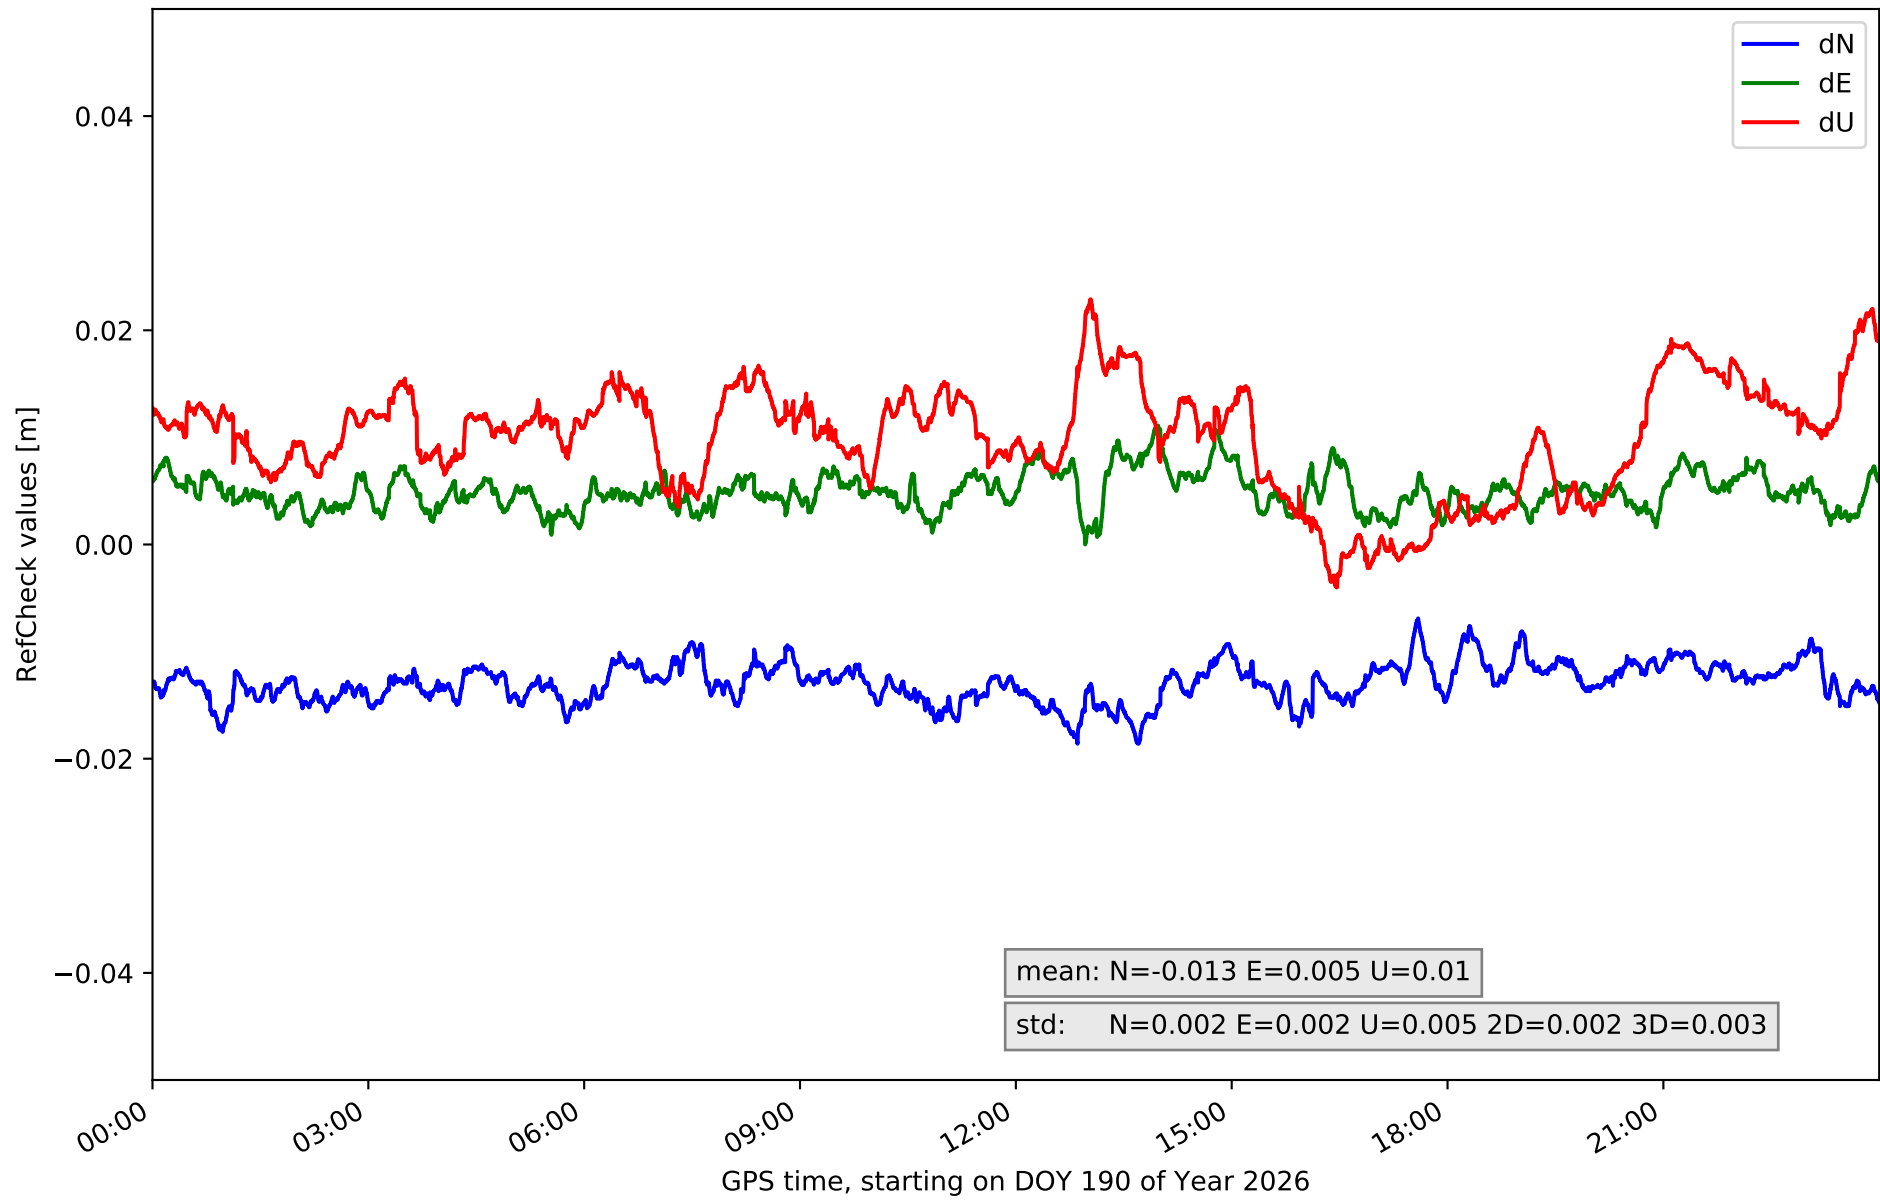


RefCheck for station LP03 in network N32T

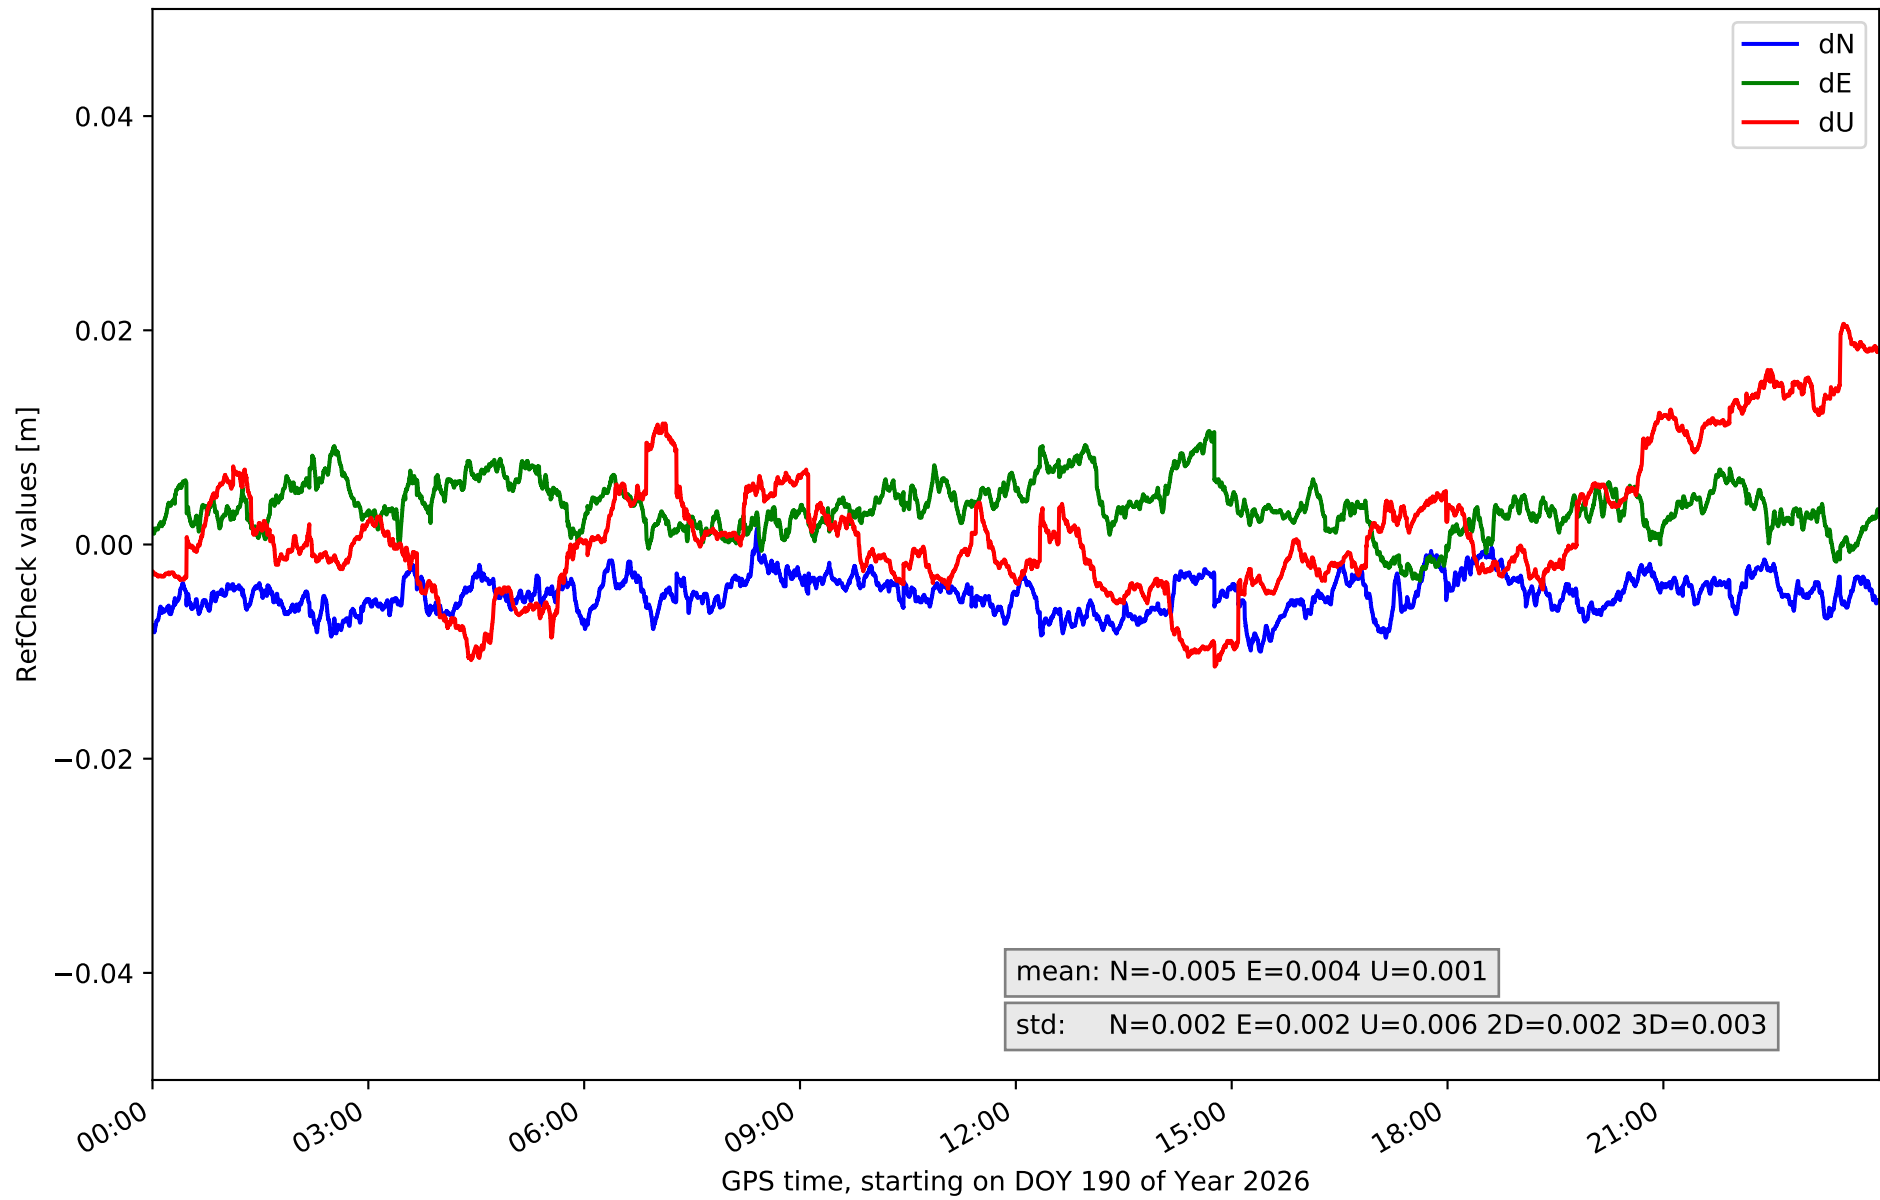


RefCheck for station LPAL in network N32T

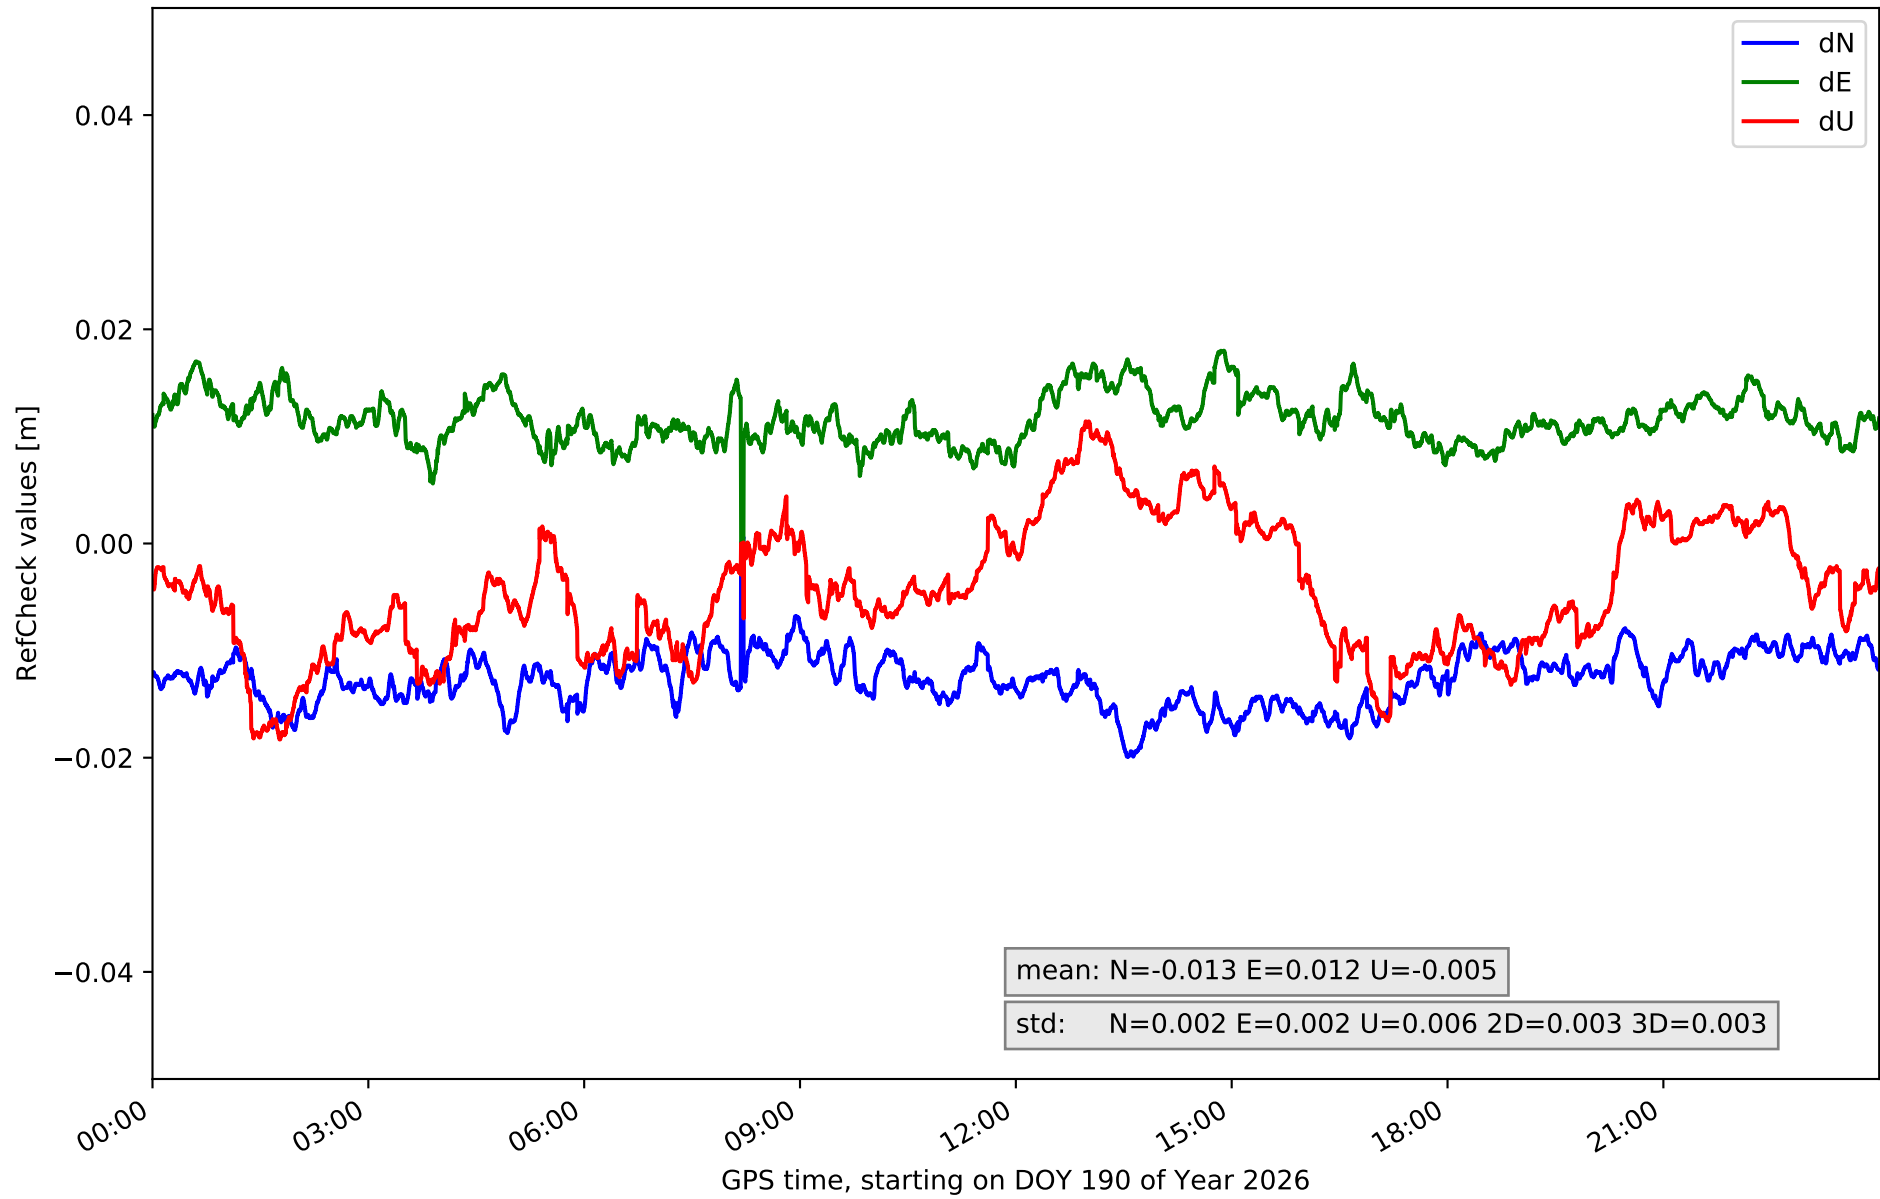


RefCheck for station LRES in network N32T

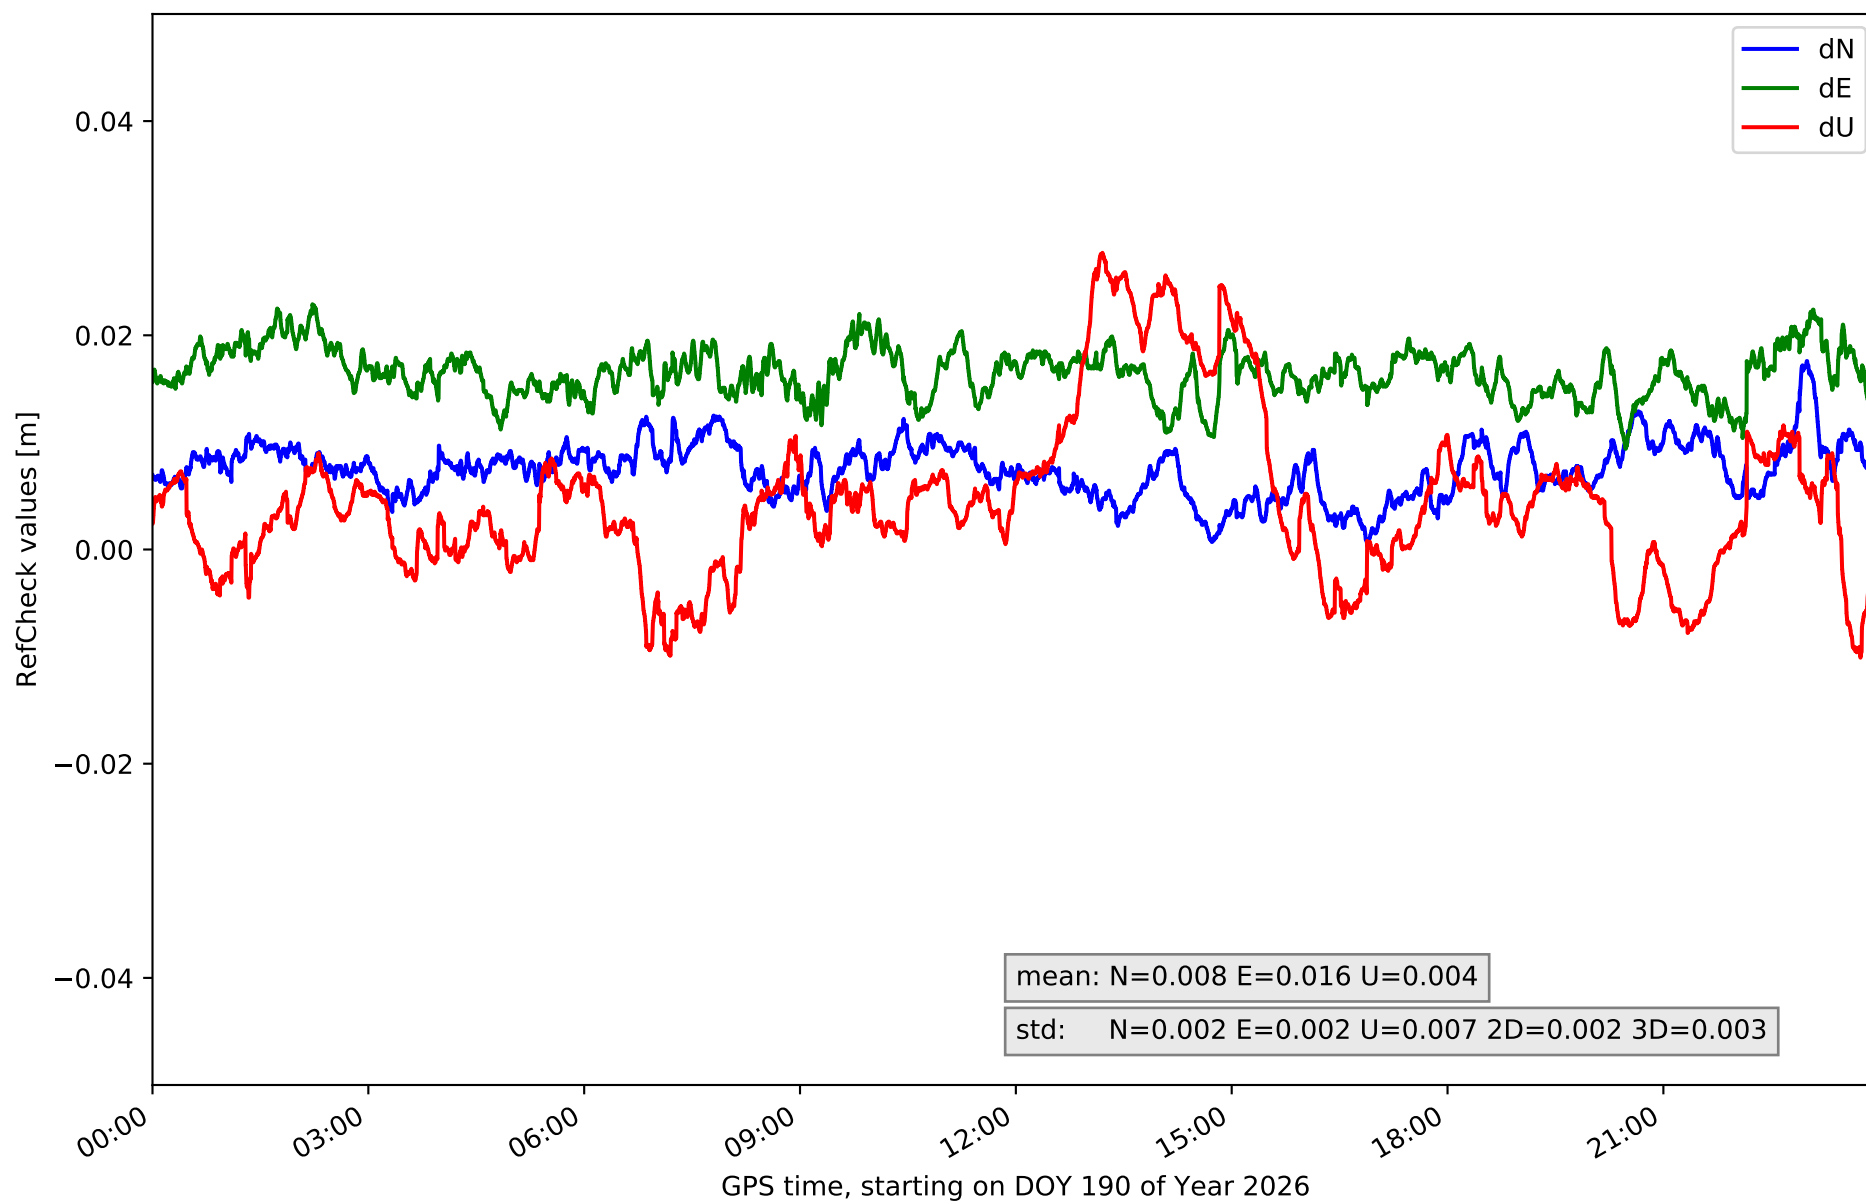


RefCheck for station TN01 in network N32T

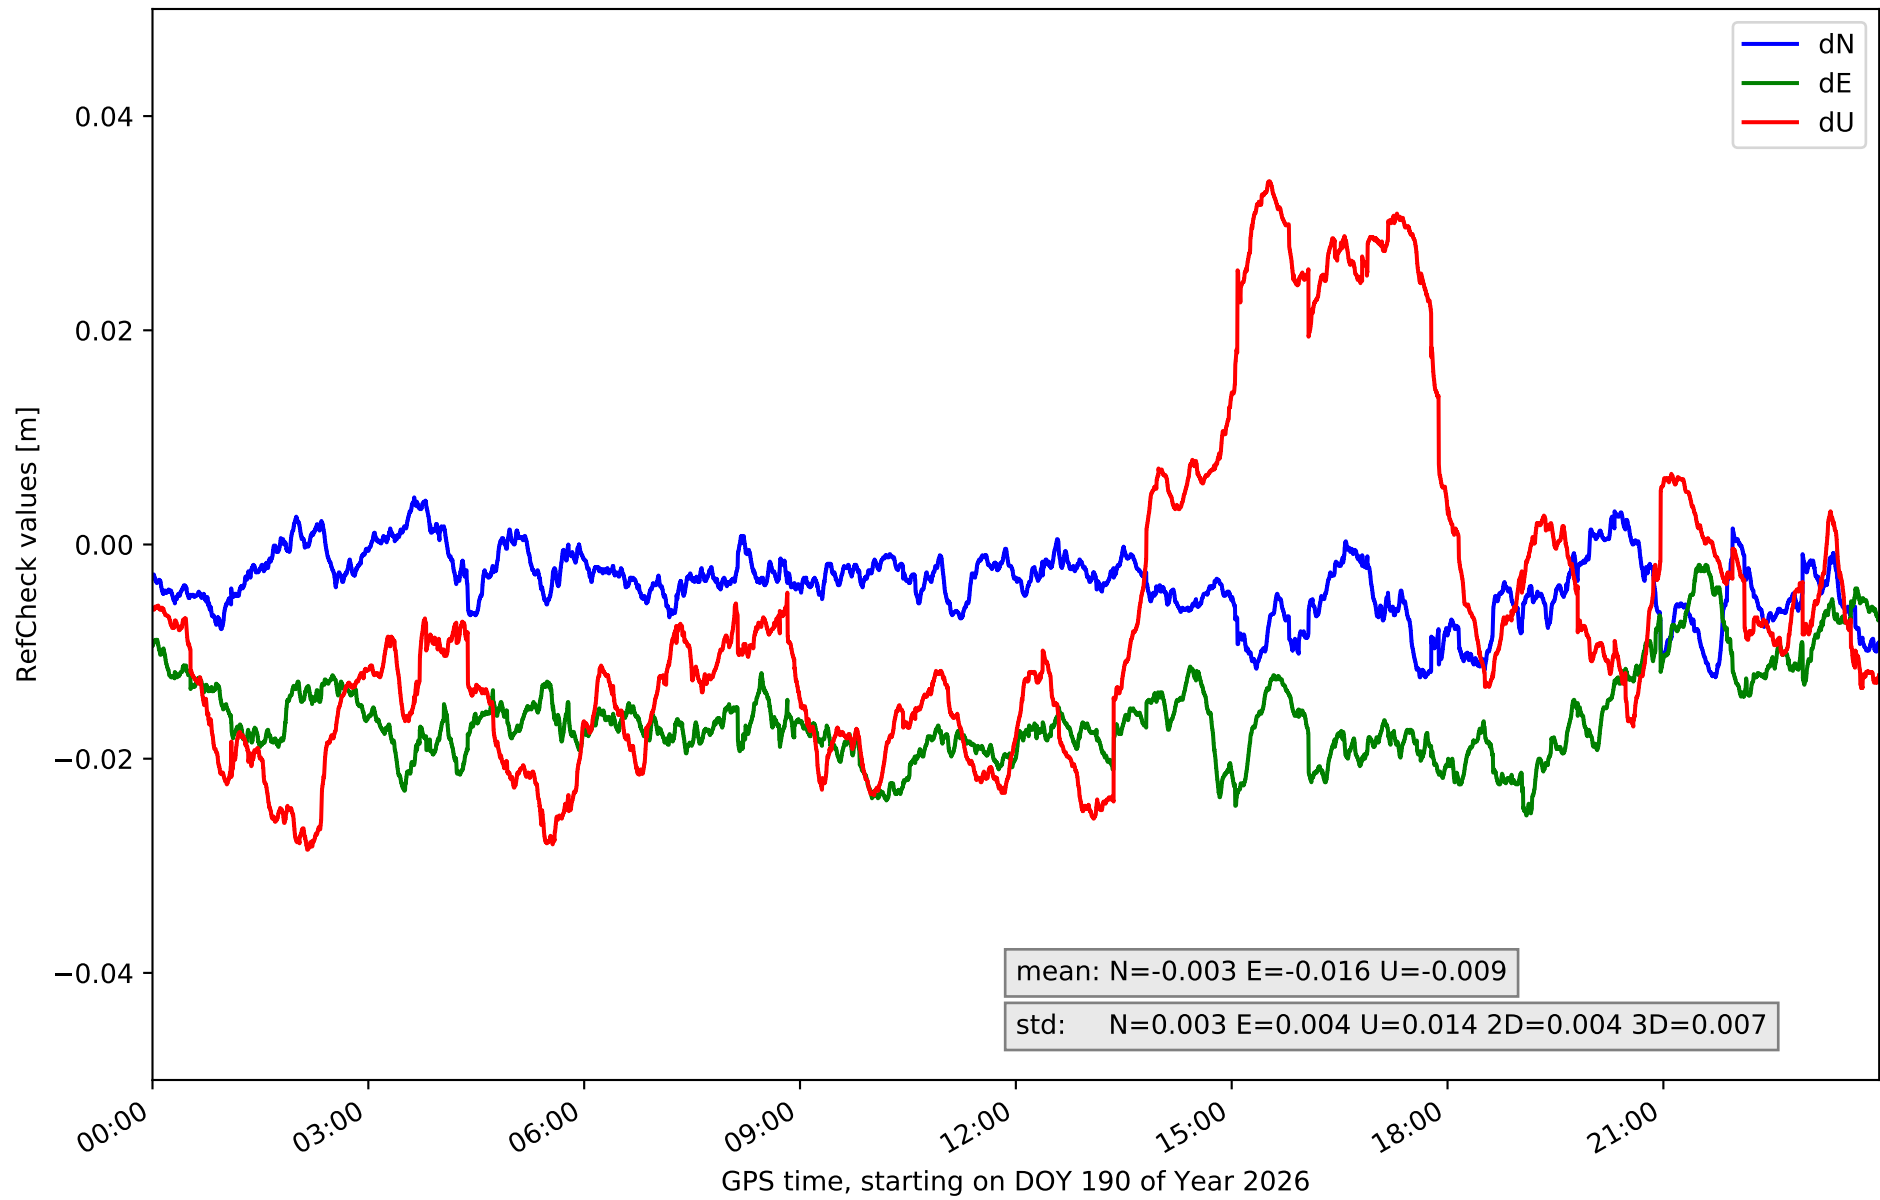


RefCheck for station TN02 in network N32T

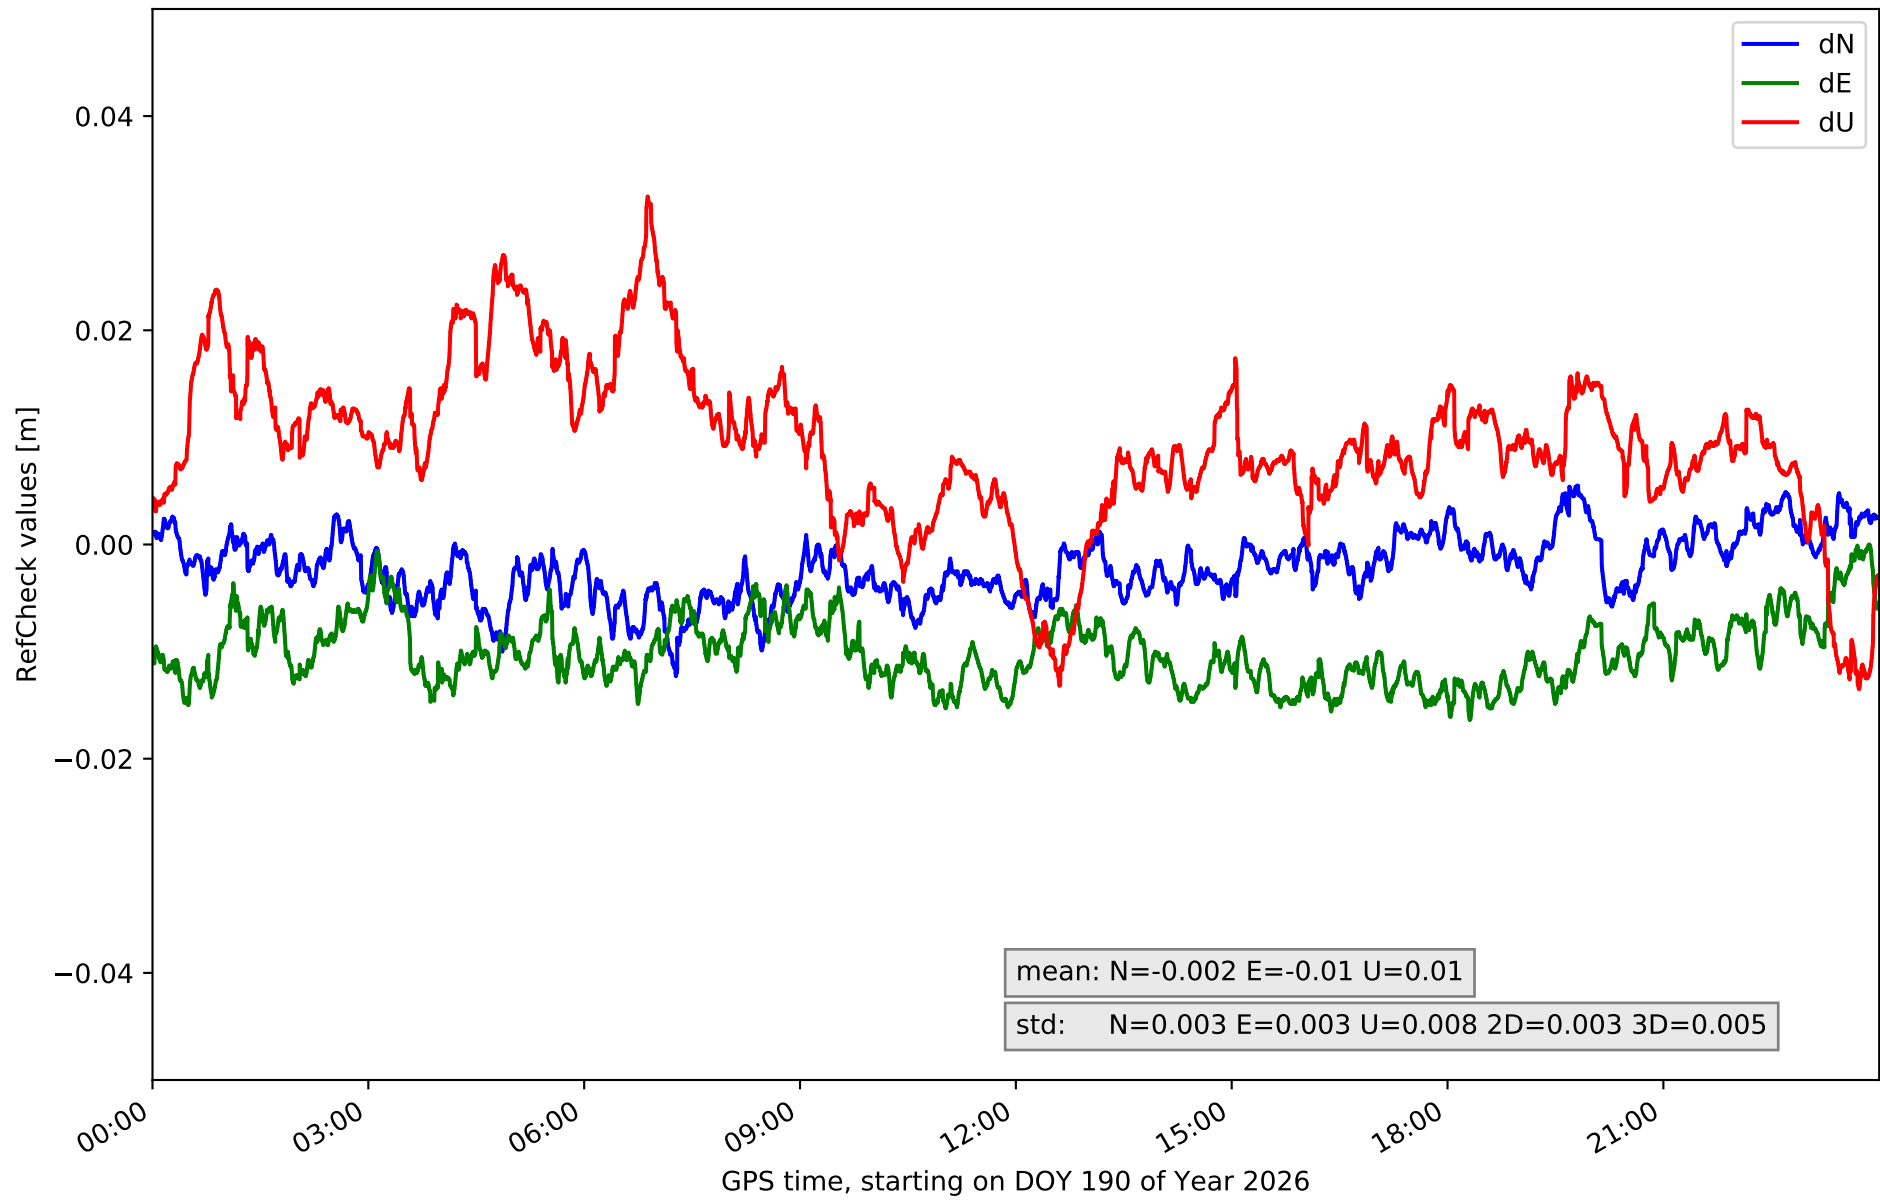


RefCheck for station TN03 in network N32T

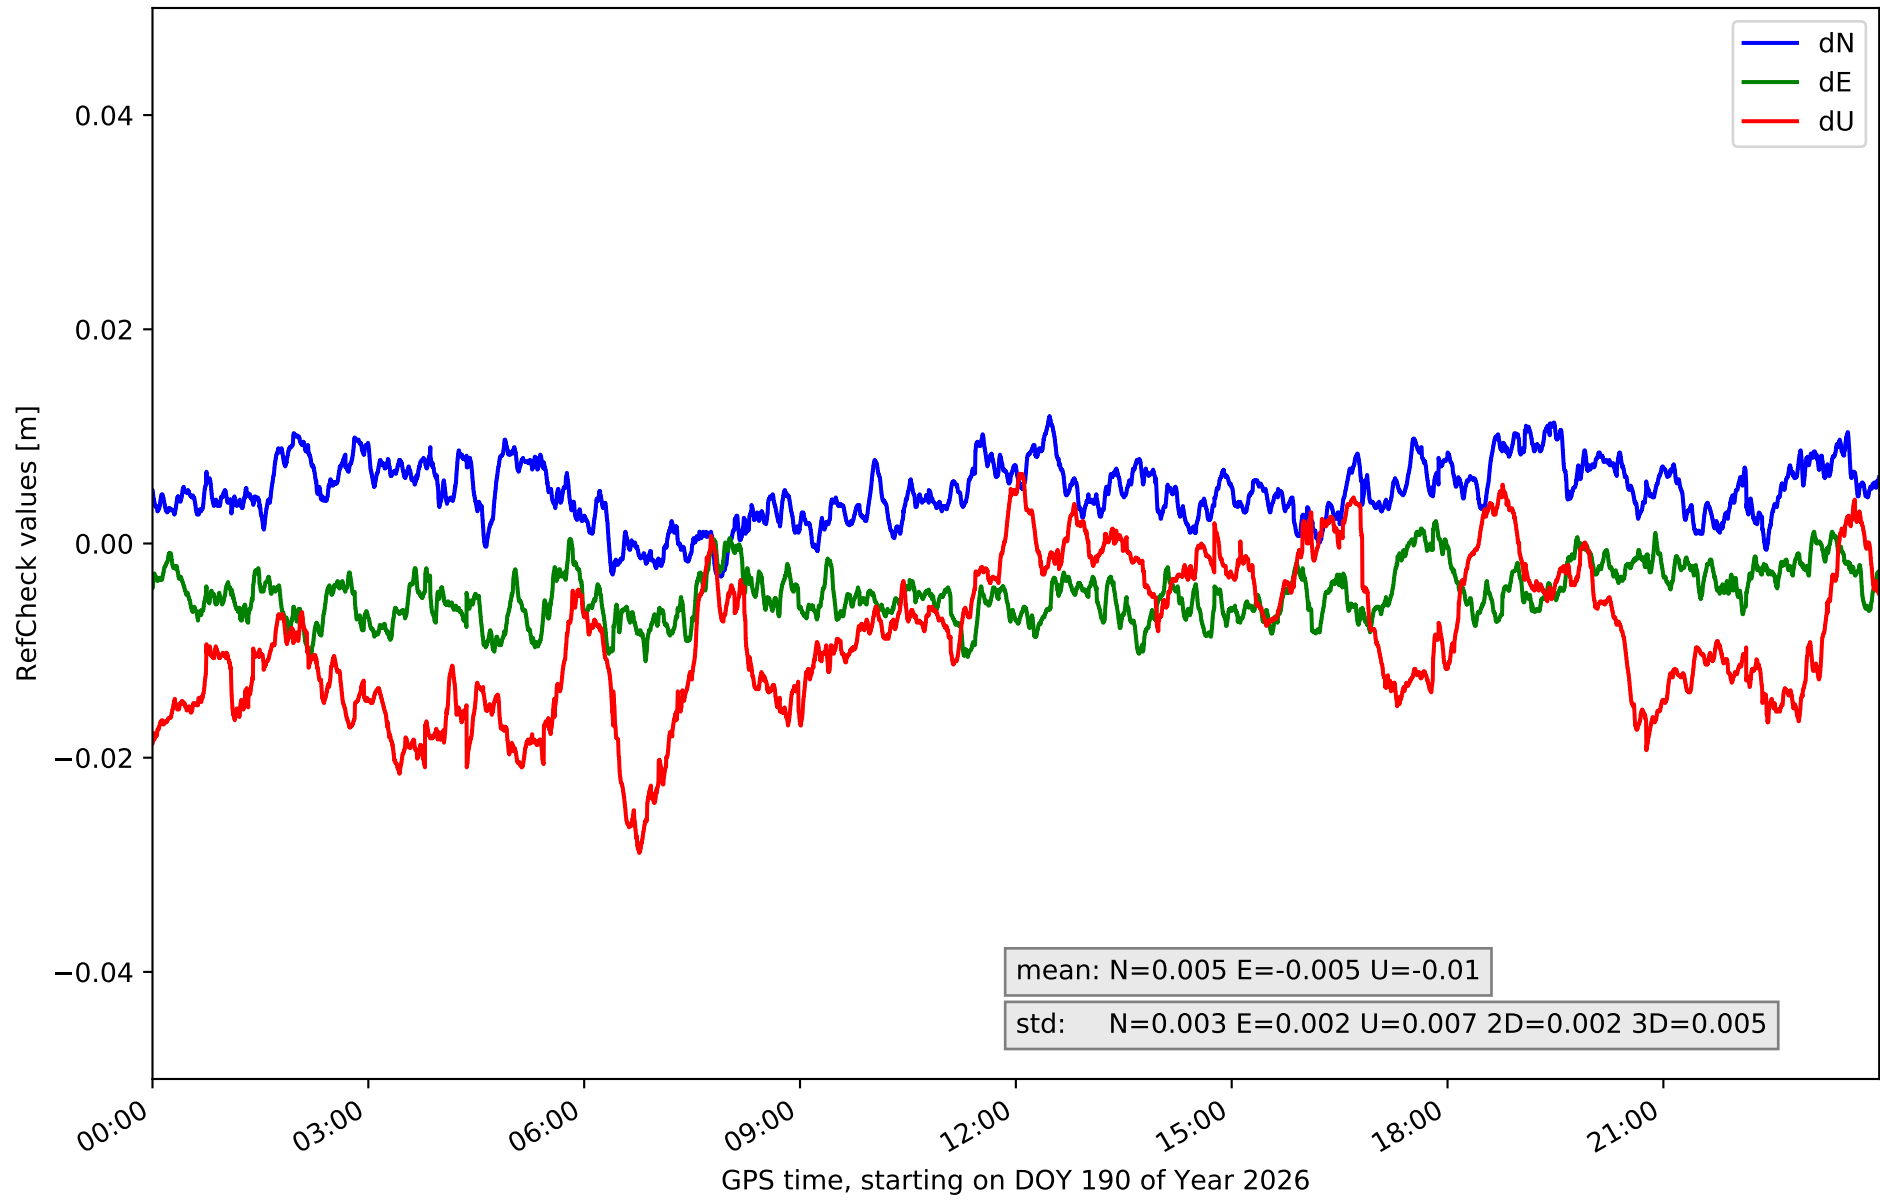


RefCheck for station TN06 in network N32T

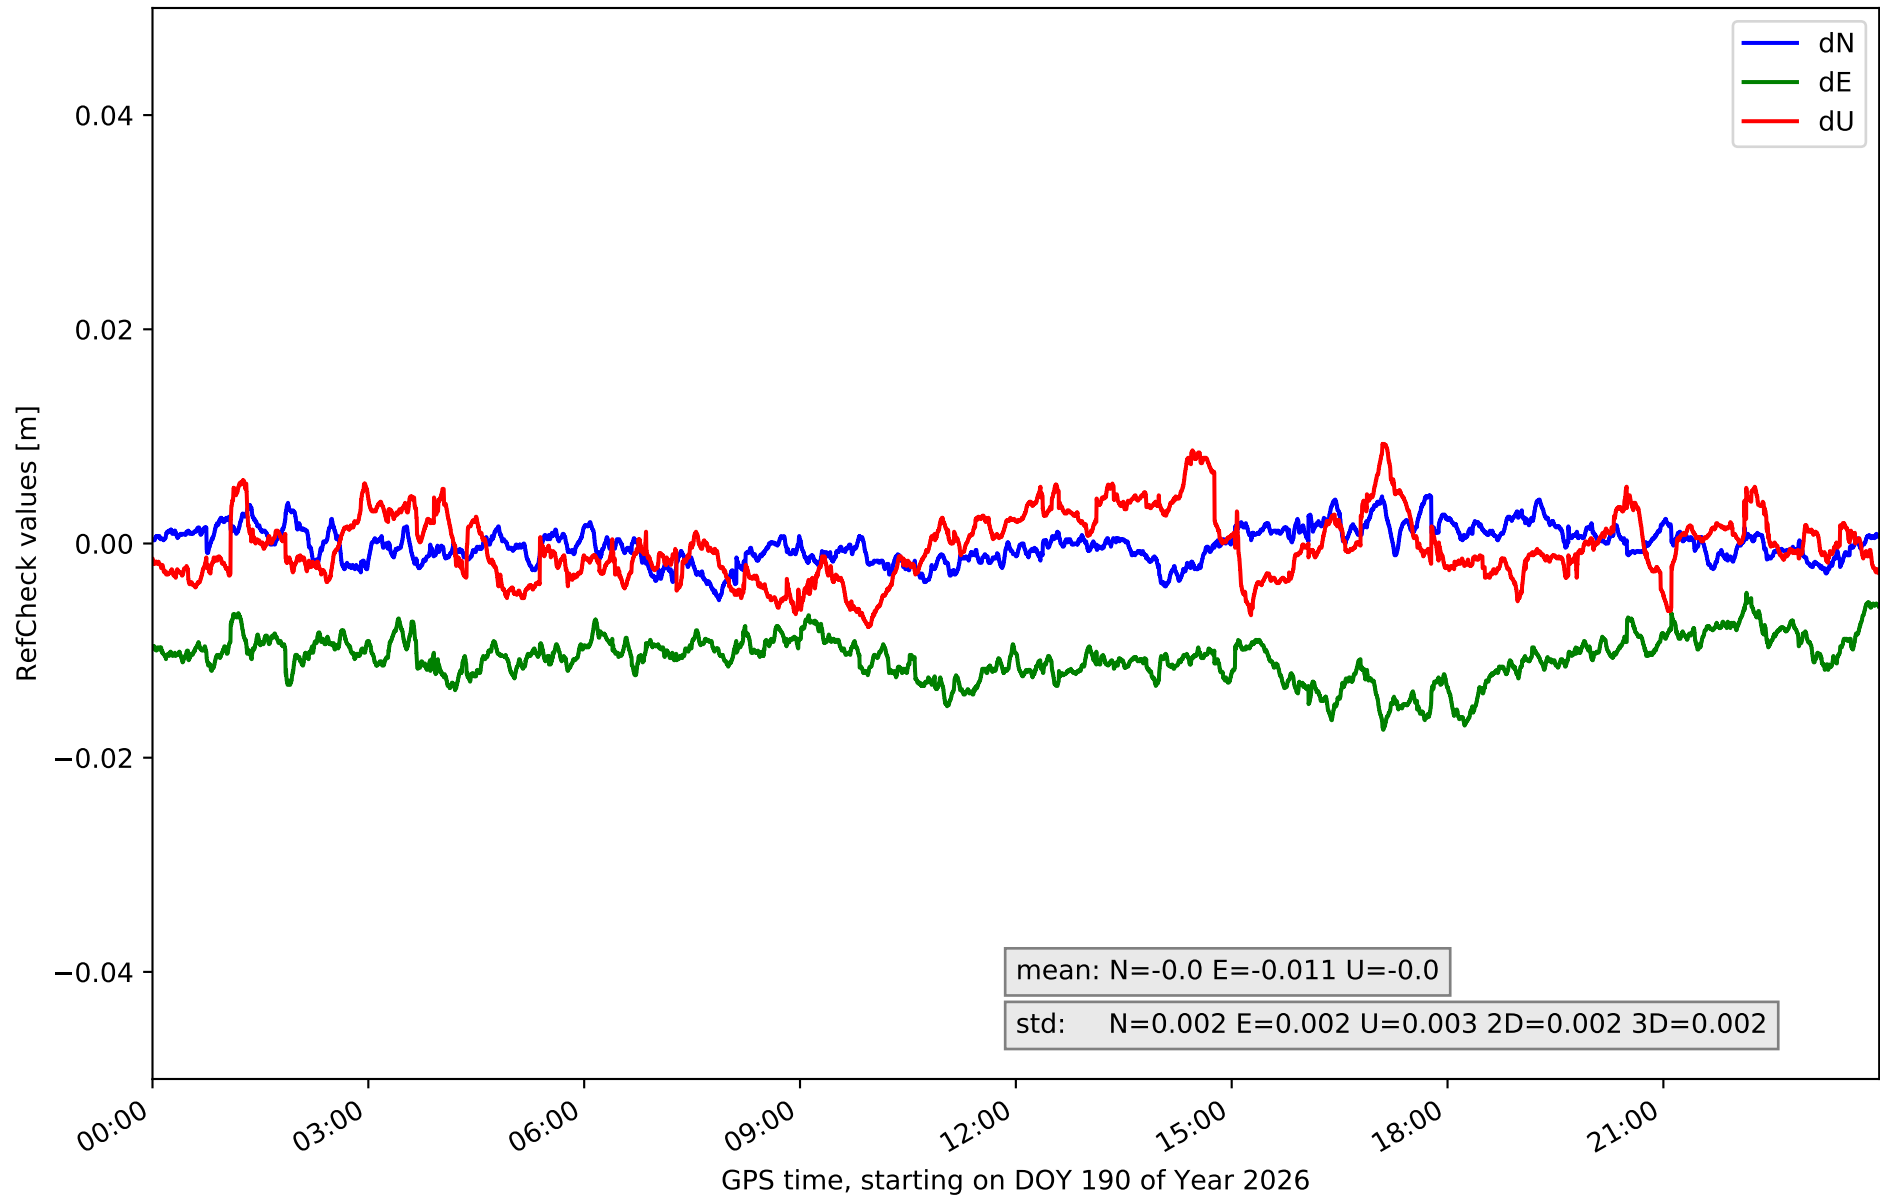

RefCheck for station TN09 in network N32T

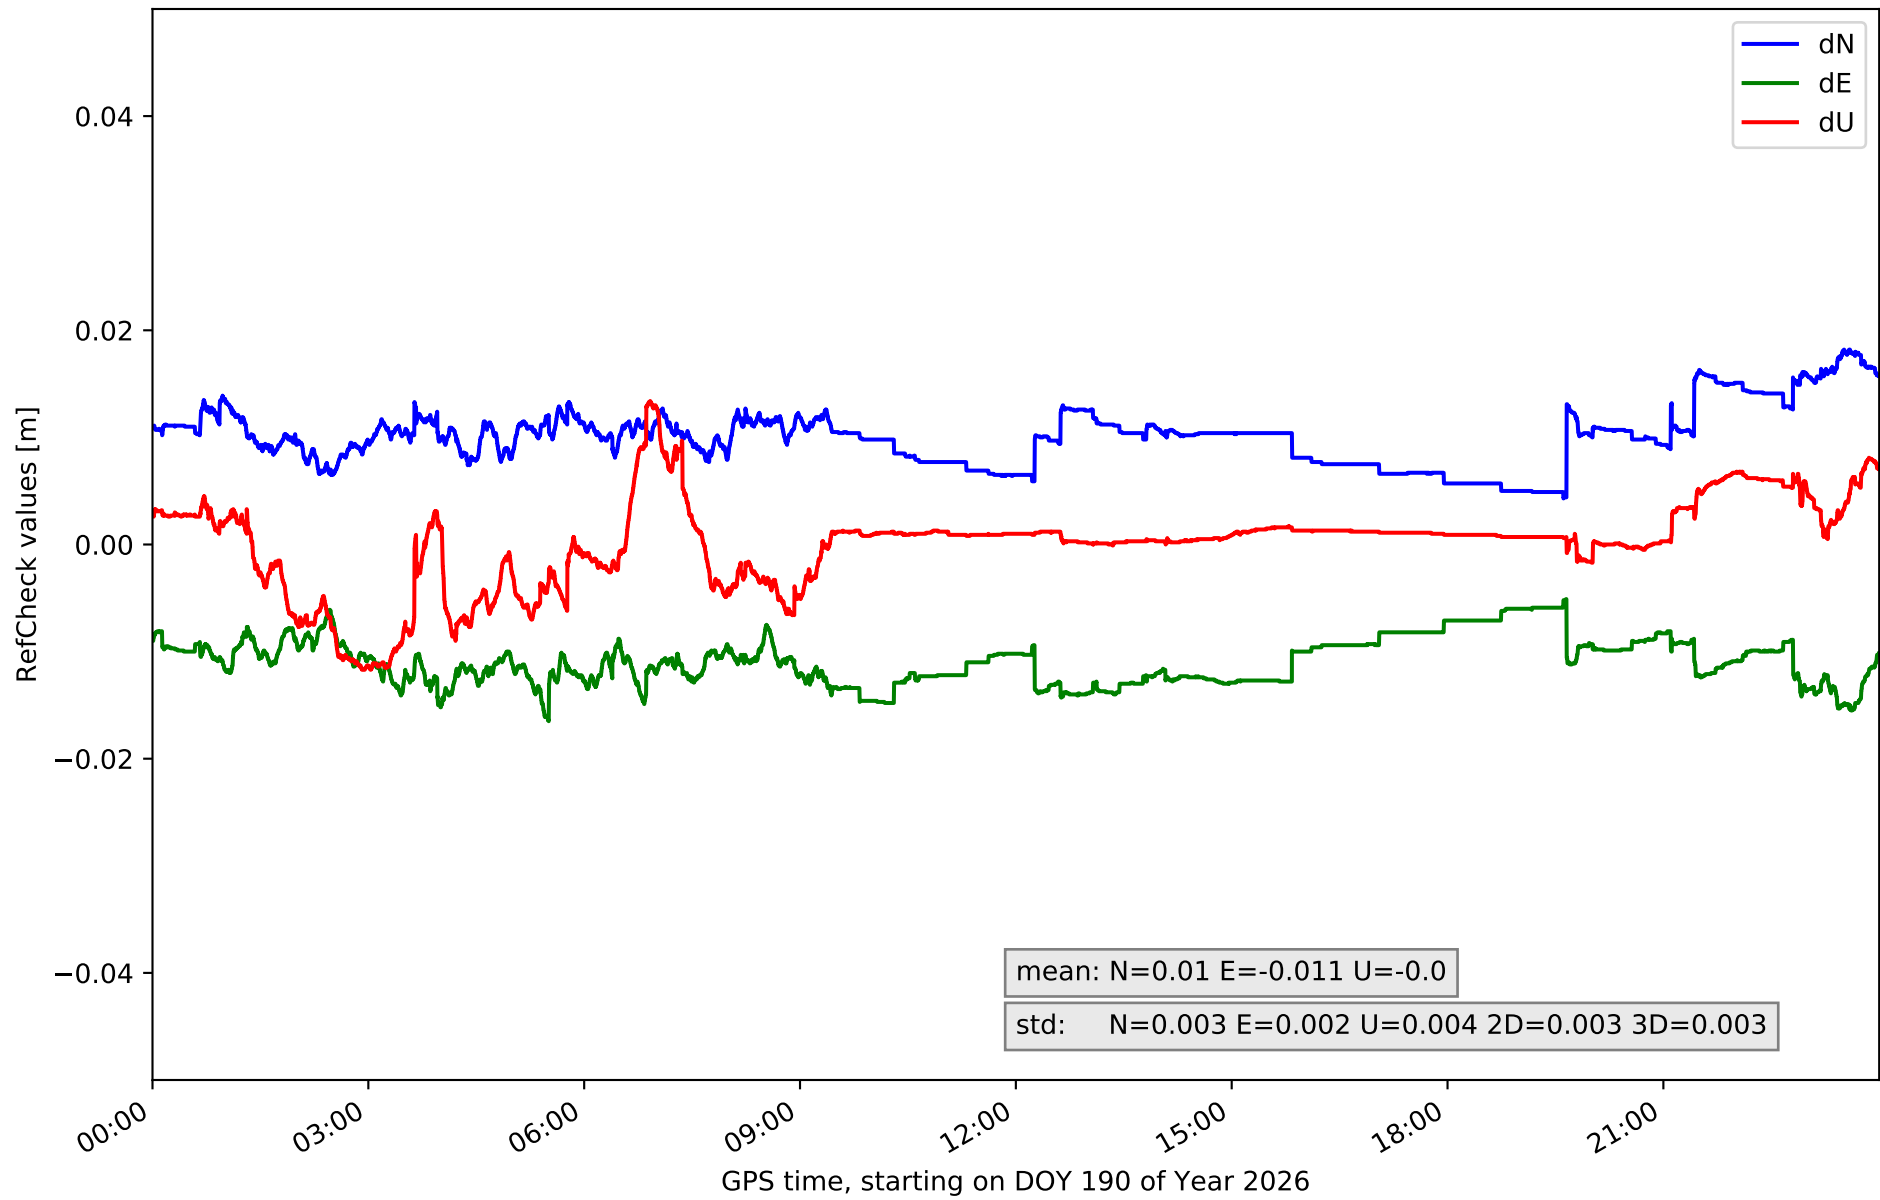

RefCheck for station TE11 in network N32T

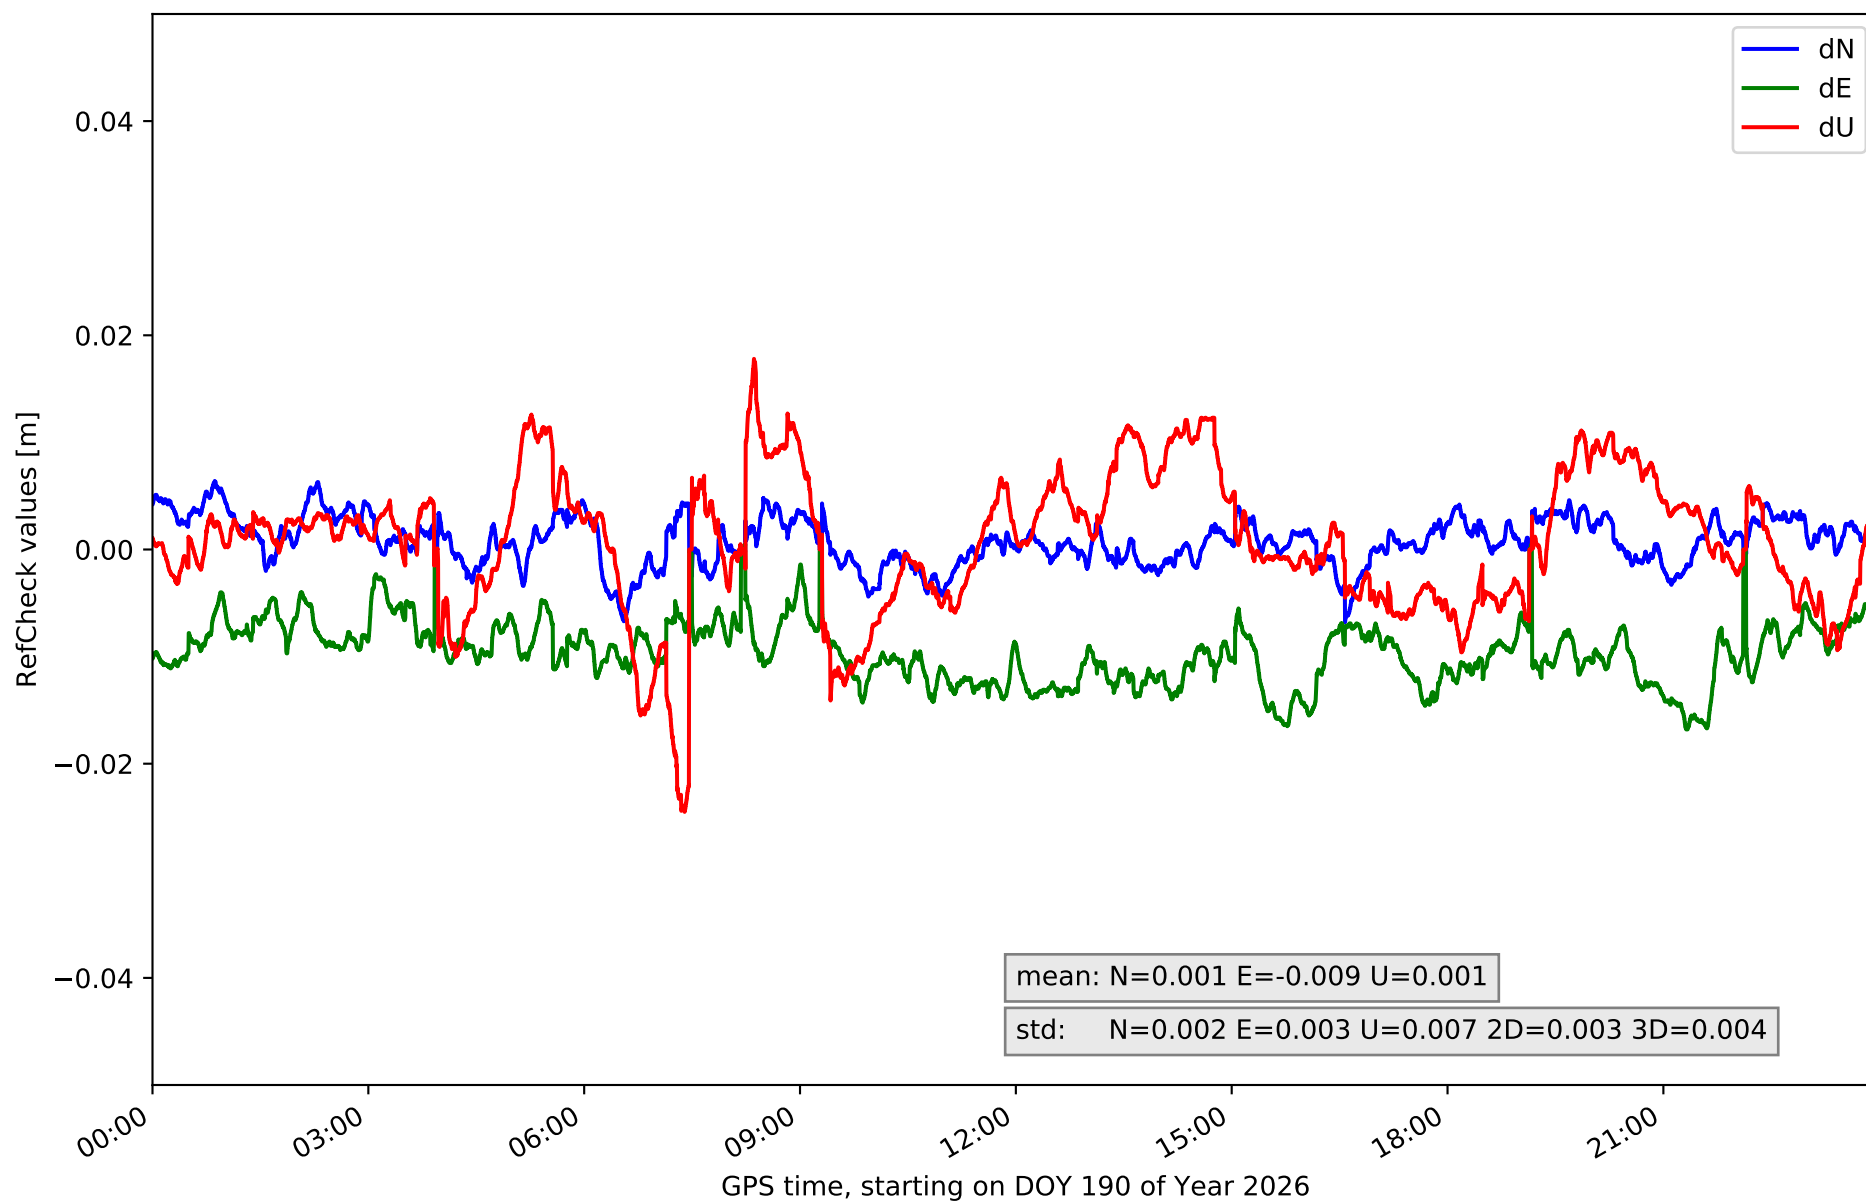

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.003	0.011	0.002	0.009	0.021	0.002	0.005	0.029	0.005	0.002	0.003	58305	99.8	42640	73.0
EH02	-0.008	0.02	0.004	0.0	0.029	0.003	-0.06	0.029	0.01	0.003	0.005	58132	99.5	50321	86.1
GOM1	-0.019	0.007	0.004	-0.025	0.005	0.005	-0.043	0.033	0.012	0.004	0.006	43872	75.1	17959	30.7
GOME	-0.01	0.014	0.003	-0.006	0.011	0.003	-0.007	0.025	0.007	0.002	0.006	2179	3.7	5018	8.6
IZAN	-0.008	0.004	0.002	-0.019	0.001	0.004	-0.024	0.005	0.006	0.003	0.005	41032	70.2	8403	14.4
LP01	-0.019	-0.007	0.002	0.0	0.011	0.002	-0.004	0.023	0.005	0.002	0.003	57287	98.0	11491	19.7
LP03	-0.01	0.002	0.002	-0.003	0.011	0.002	-0.011	0.021	0.006	0.002	0.003	1933	3.3	340	0.6
LPAL	-0.02	0.001	0.002	-0.0	0.018	0.002	-0.018	0.011	0.006	0.003	0.003	58343	99.8	15772	27.0
LRES	0.001	0.018	0.002	0.009	0.023	0.002	-0.01	0.028	0.007	0.002	0.003	58449	100.0	22142	37.9
TN01	-0.012	0.004	0.003	-0.025	-0.002	0.004	-0.029	0.034	0.014	0.004	0.007	55032	94.2	39532	67.6
TN02	-0.012	0.005	0.003	-0.016	-0.0	0.003	-0.013	0.033	0.008	0.003	0.005	35476	60.7	11130	19.0
TN03	-0.003	0.012	0.003	-0.011	0.002	0.002	-0.029	0.006	0.007	0.002	0.005	9115	15.6	6437	11.0
TN06	-0.005	0.004	0.002	-0.017	-0.005	0.002	-0.008	0.009	0.003	0.002	0.002	36492	62.4	18	0.0
TN09	0.004	0.018	0.003	-0.017	-0.005	0.002	-0.012	0.013	0.004	0.003	0.003	54890	93.9	4900	8.4
TE11	-0.007	0.006	0.002	-0.017	0.001	0.003	-0.025	0.018	0.007	0.003	0.004	24541	42.0	682	1.2
Mean	-0.009	0.008	0.003	-0.009	0.008	0.003	-0.019	0.021	0.007	0.003	0.004	39671.9	67.9	15785.7	27.0
Min/Max	-0.02	0.02	0.004	-0.025	0.029	0.005	-0.06	0.034	0.014	0.004	0.007	58449	100.0	50321	86.1

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	94.7	95.4	94.2	95.2	93.7
considering satellites with dual-frequency fixed	93.1	93.5	92.7	93.3	92.6
considering all signals separately	93.2	93.5	92.7	93.7	92.1