

summary for network N32T

timeperiod chosen: from 2026-07-10-00:00:00 until 2026-07-10-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.4 seconds


average fixing percentage with threshold set to 0.3: 93.5 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

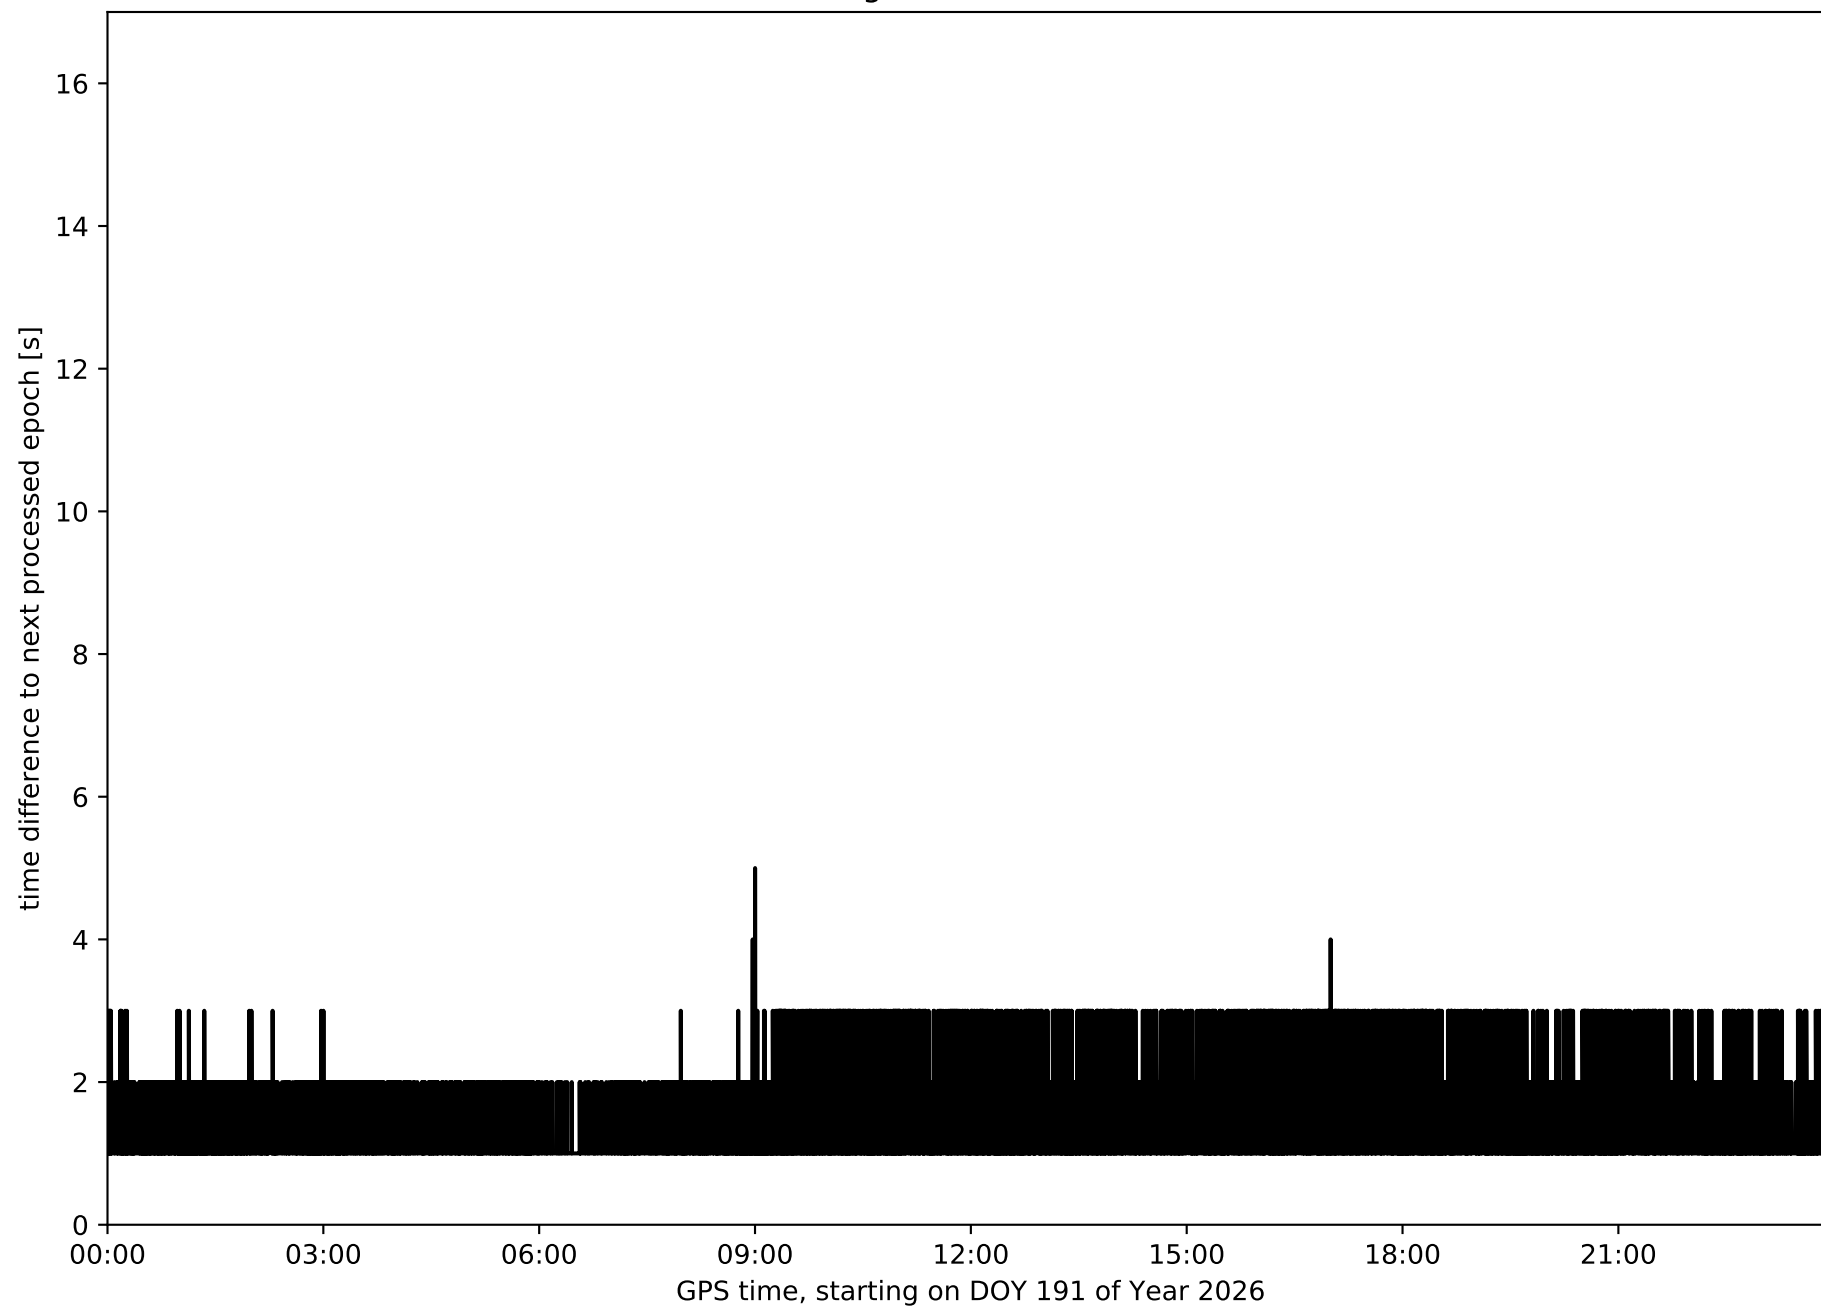


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

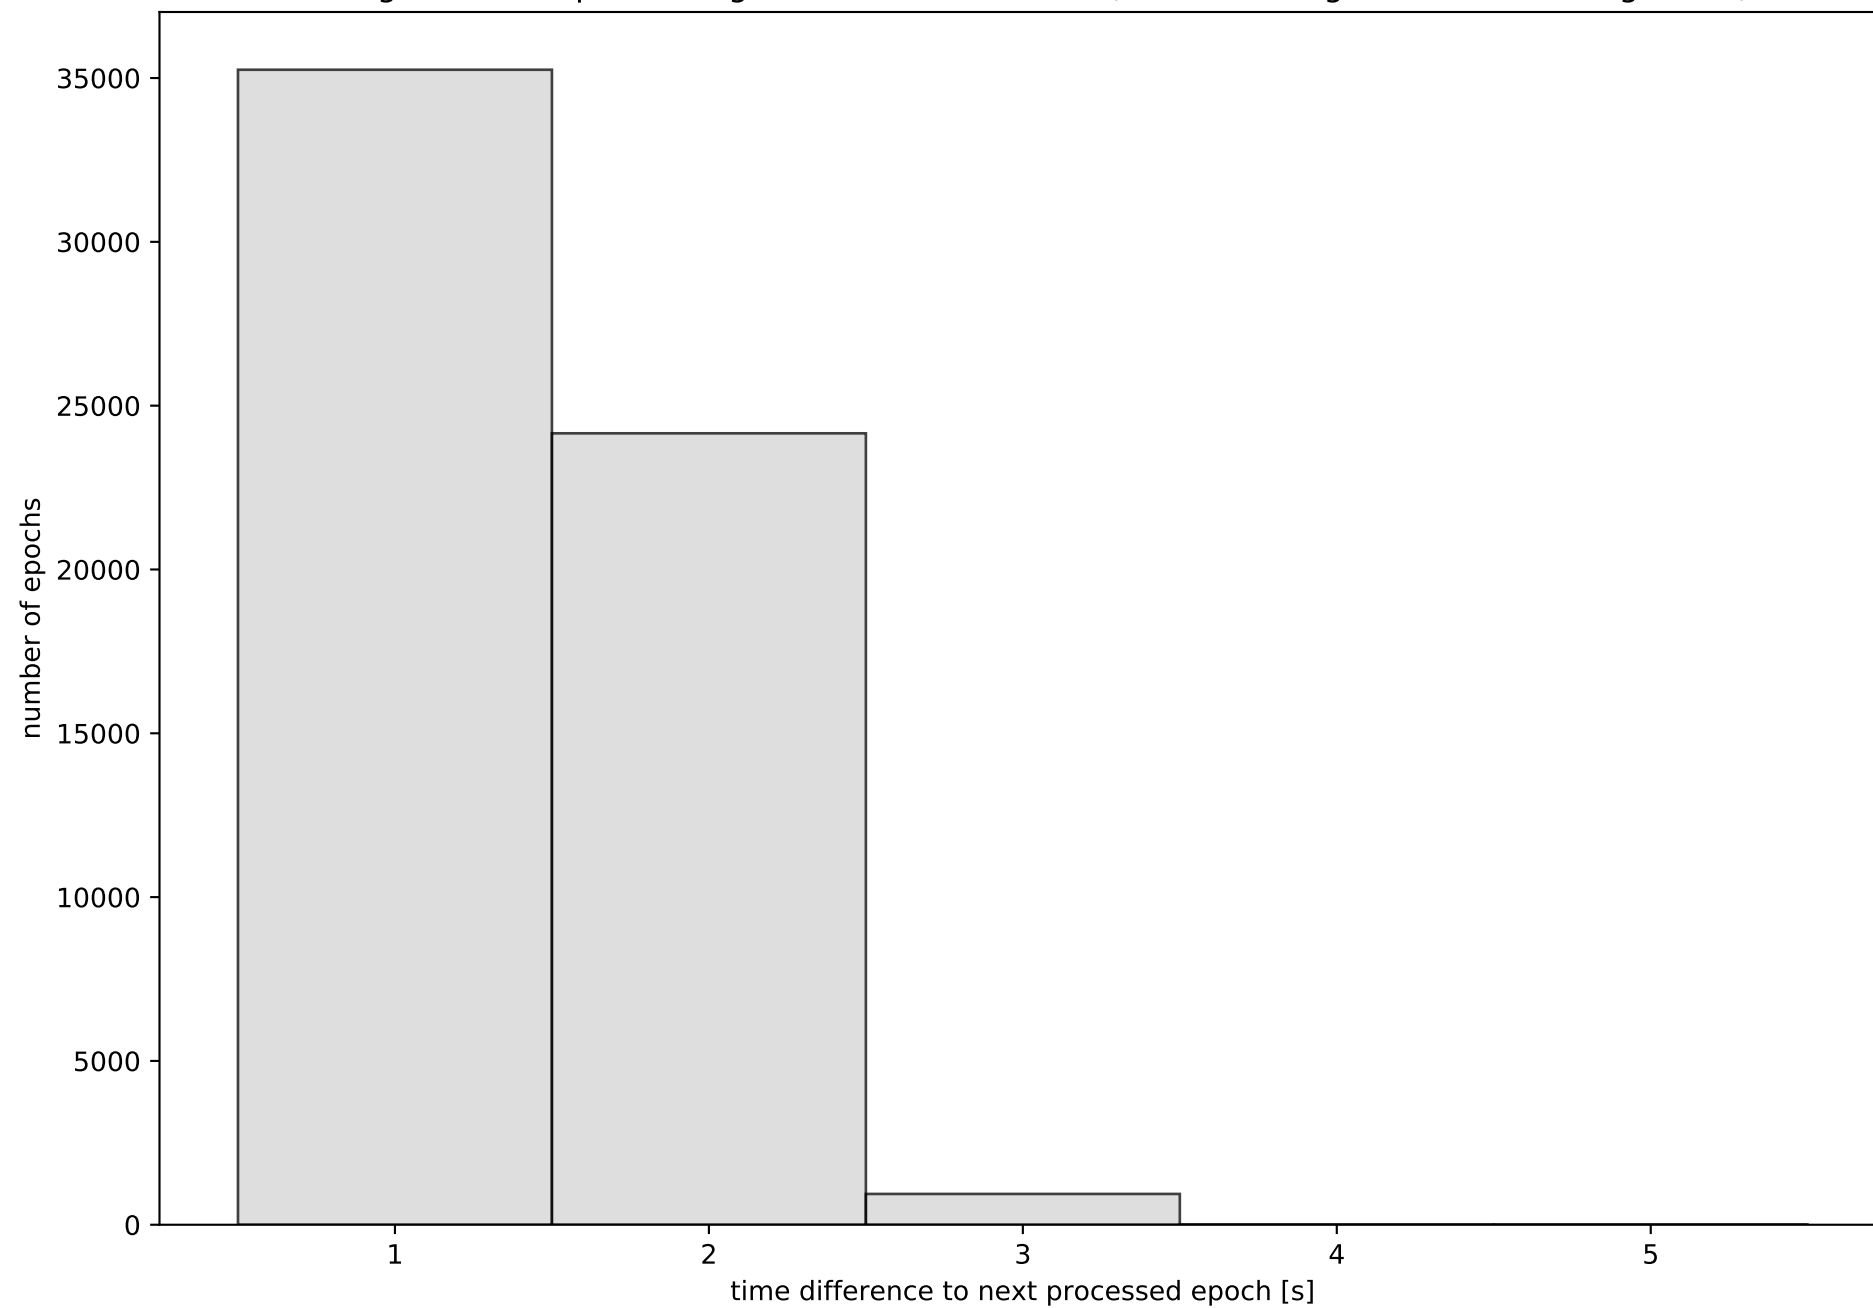


Network N32T with threshold set to 0.3

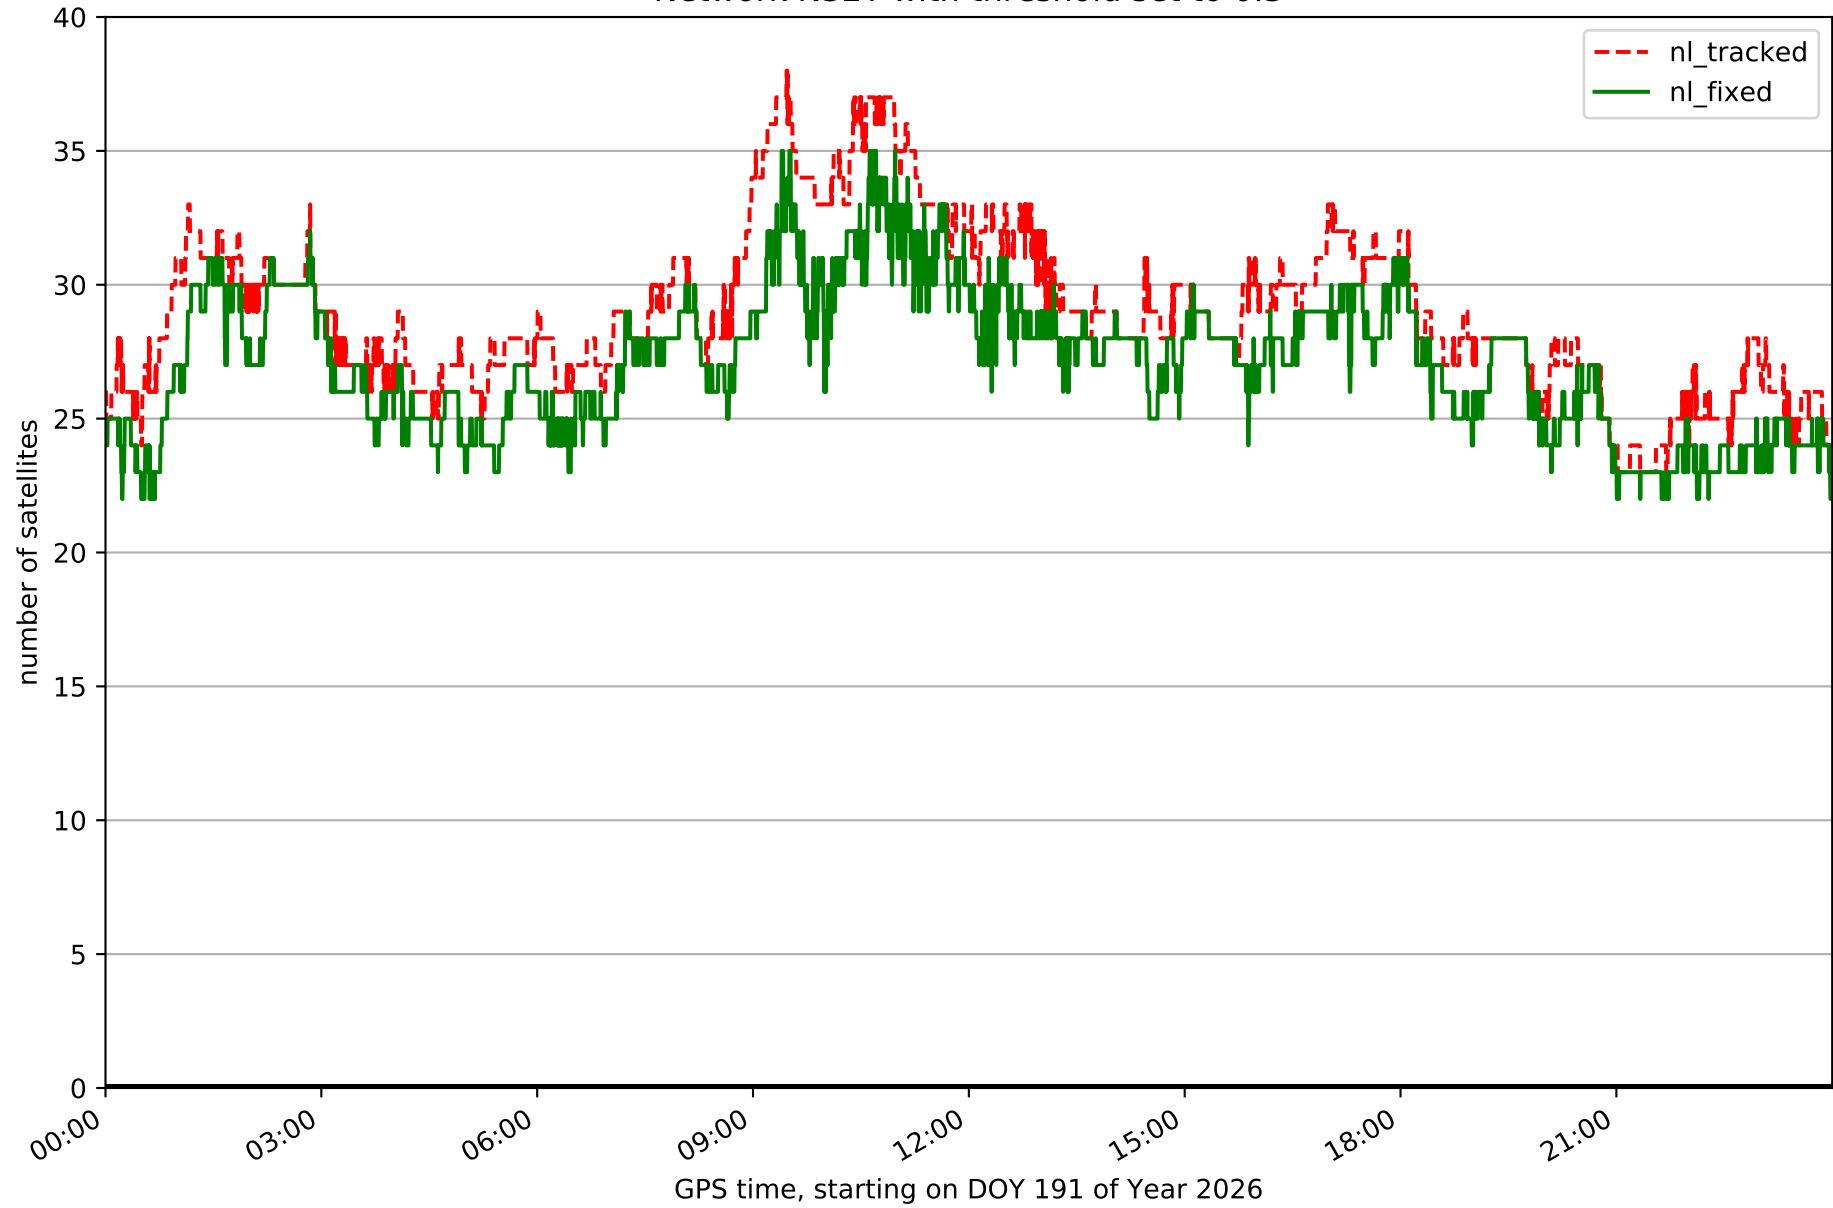


Fixing percentage of satellites in network N32T with threshold set to 0.3

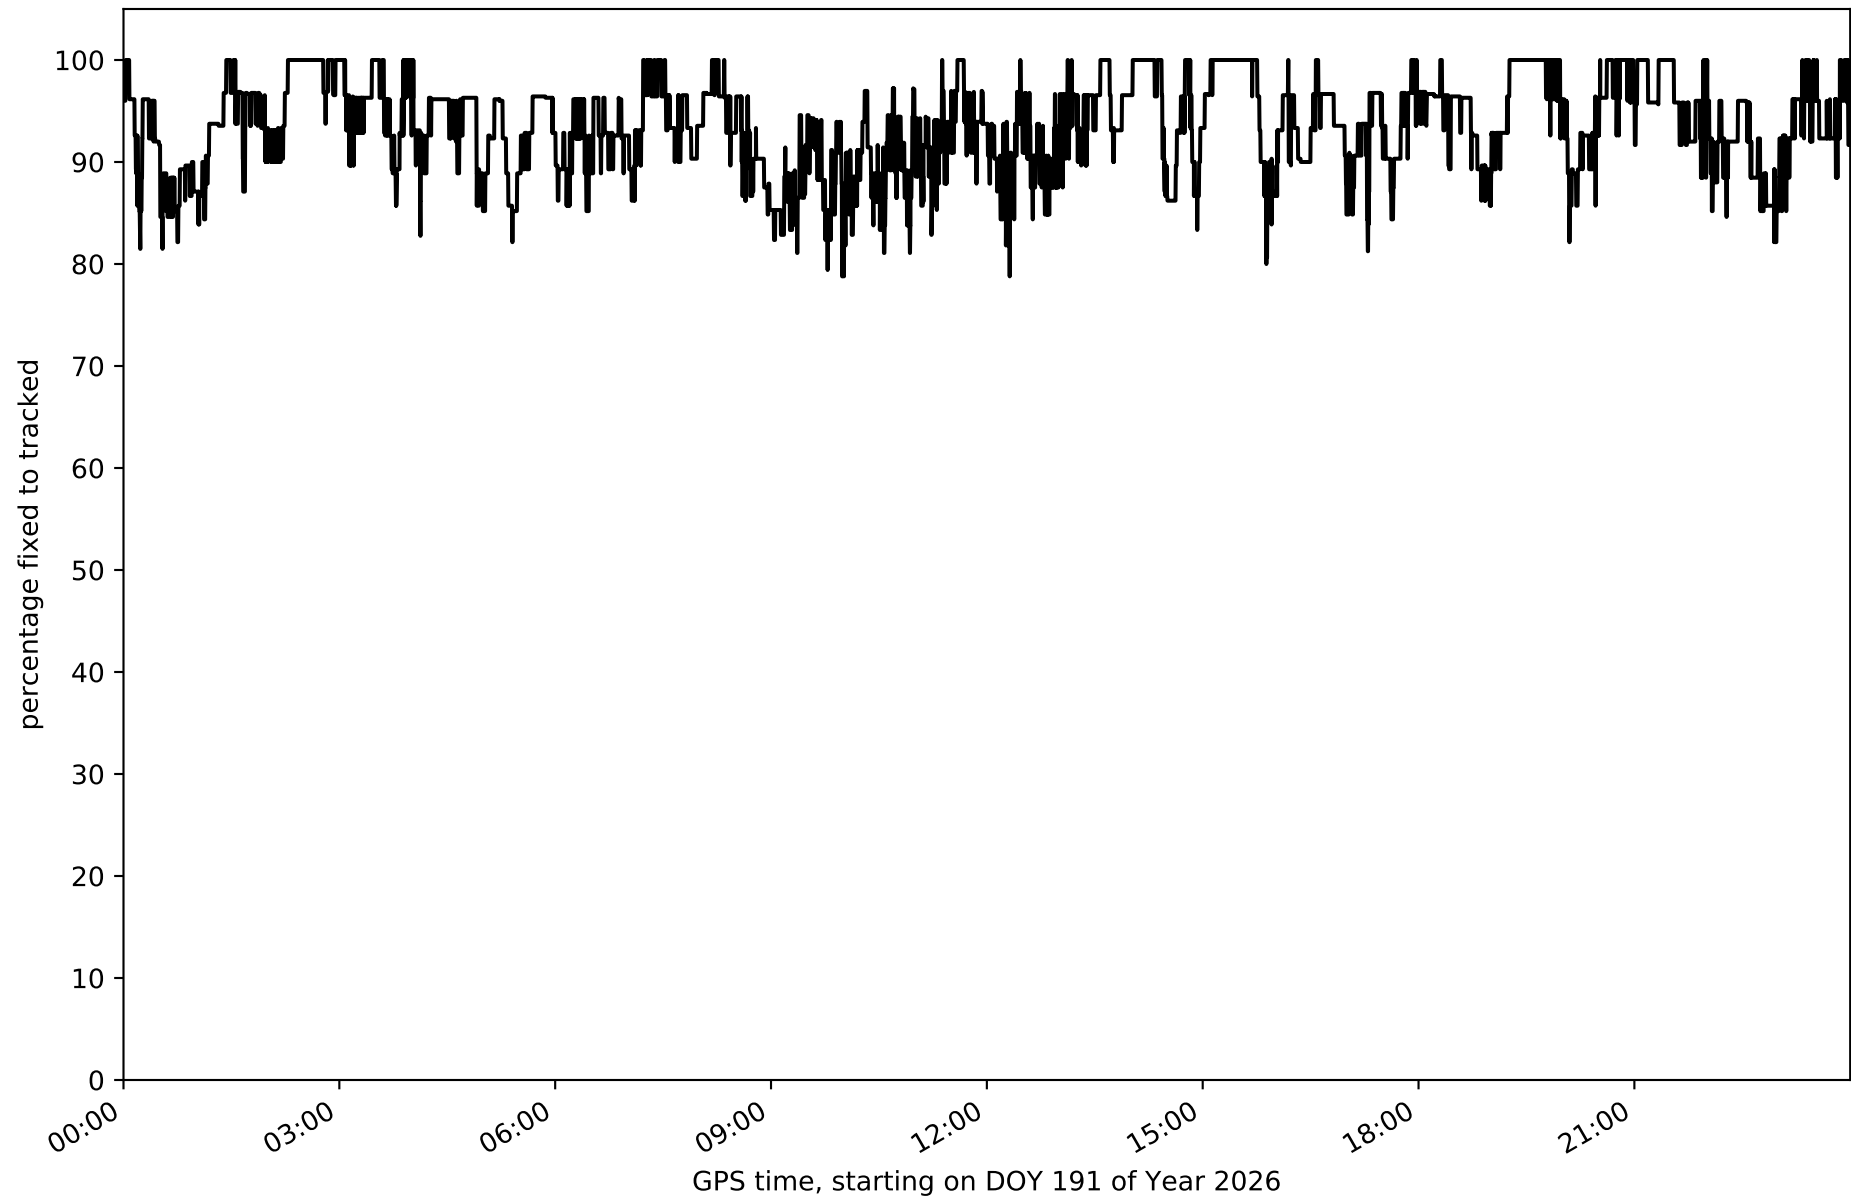


Network N32T - only GPS with threshold set to 0.3

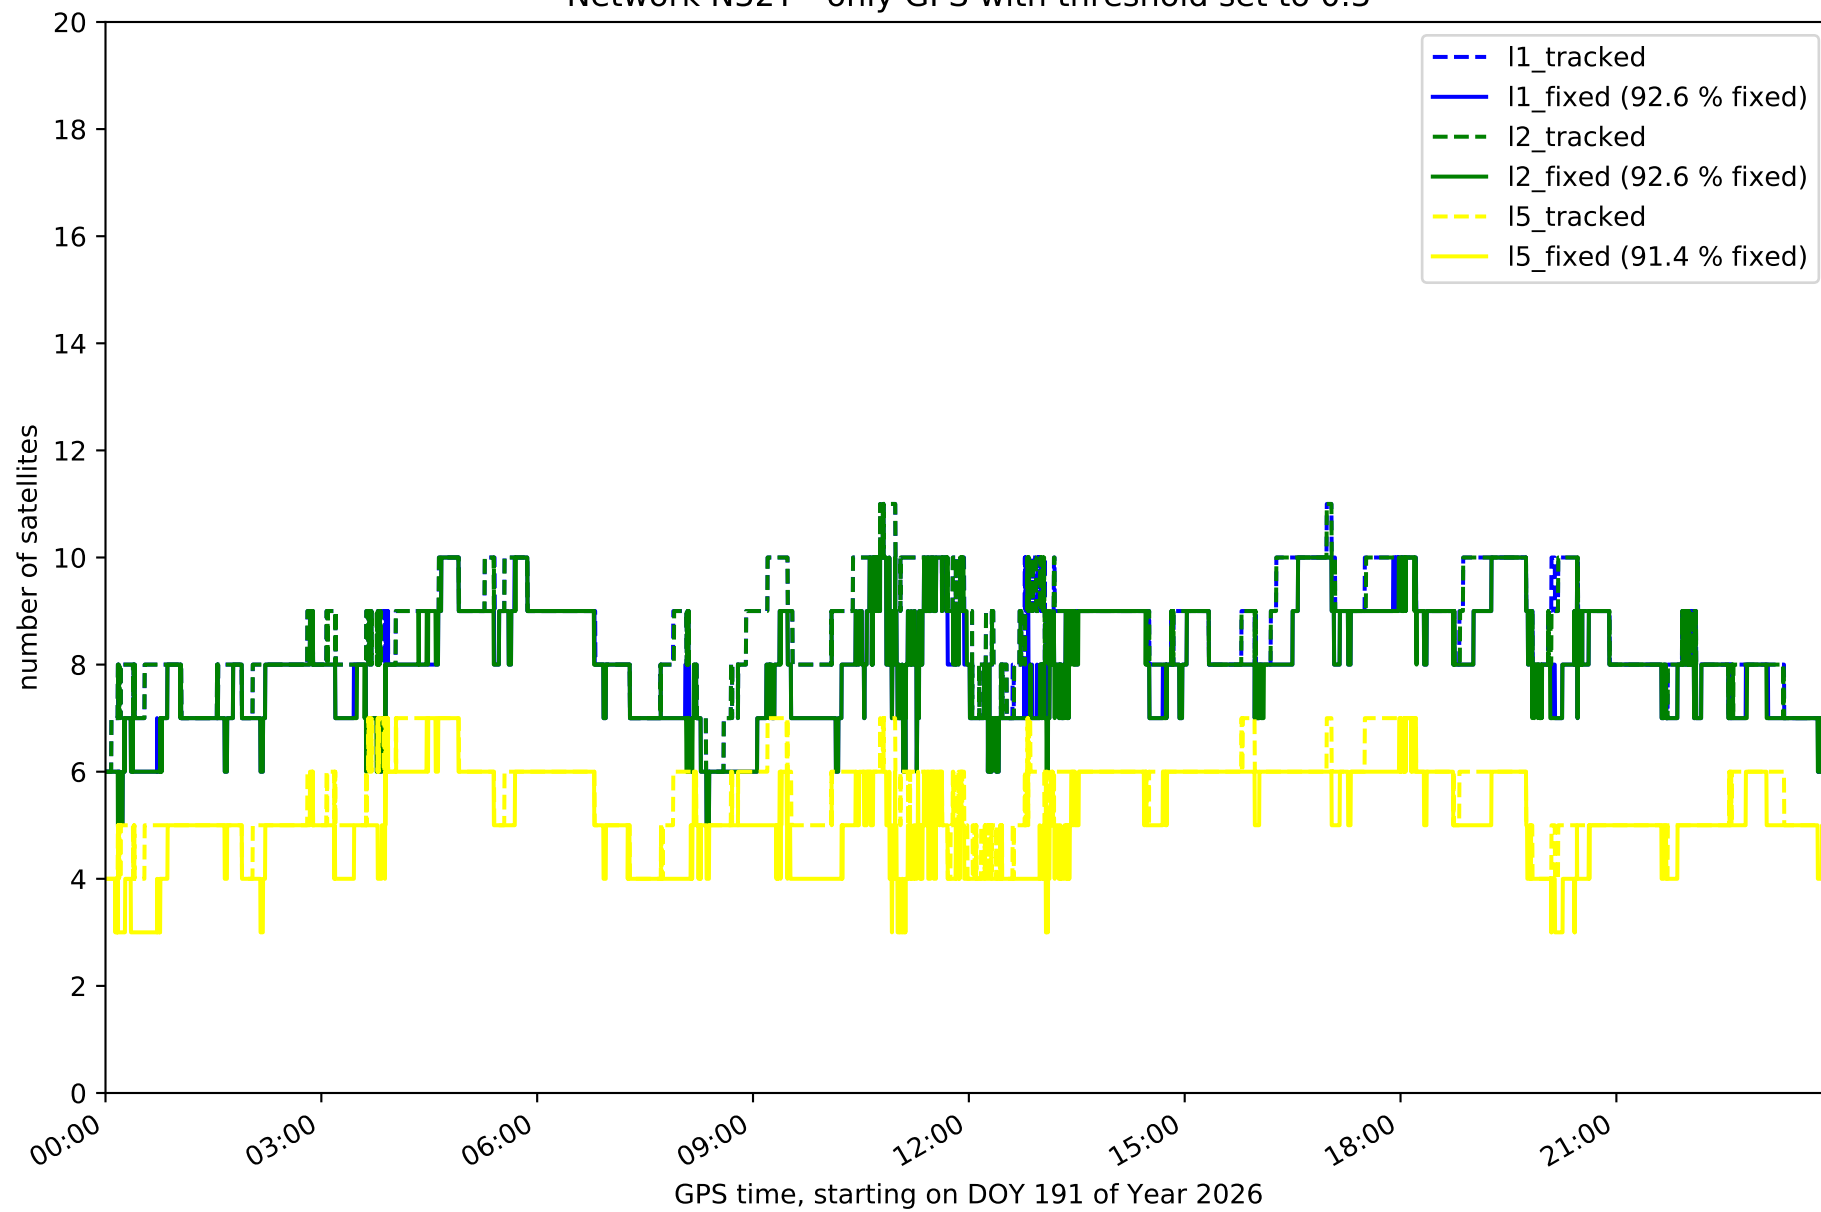


Network N32T - only GLONASS with threshold set to 0.3

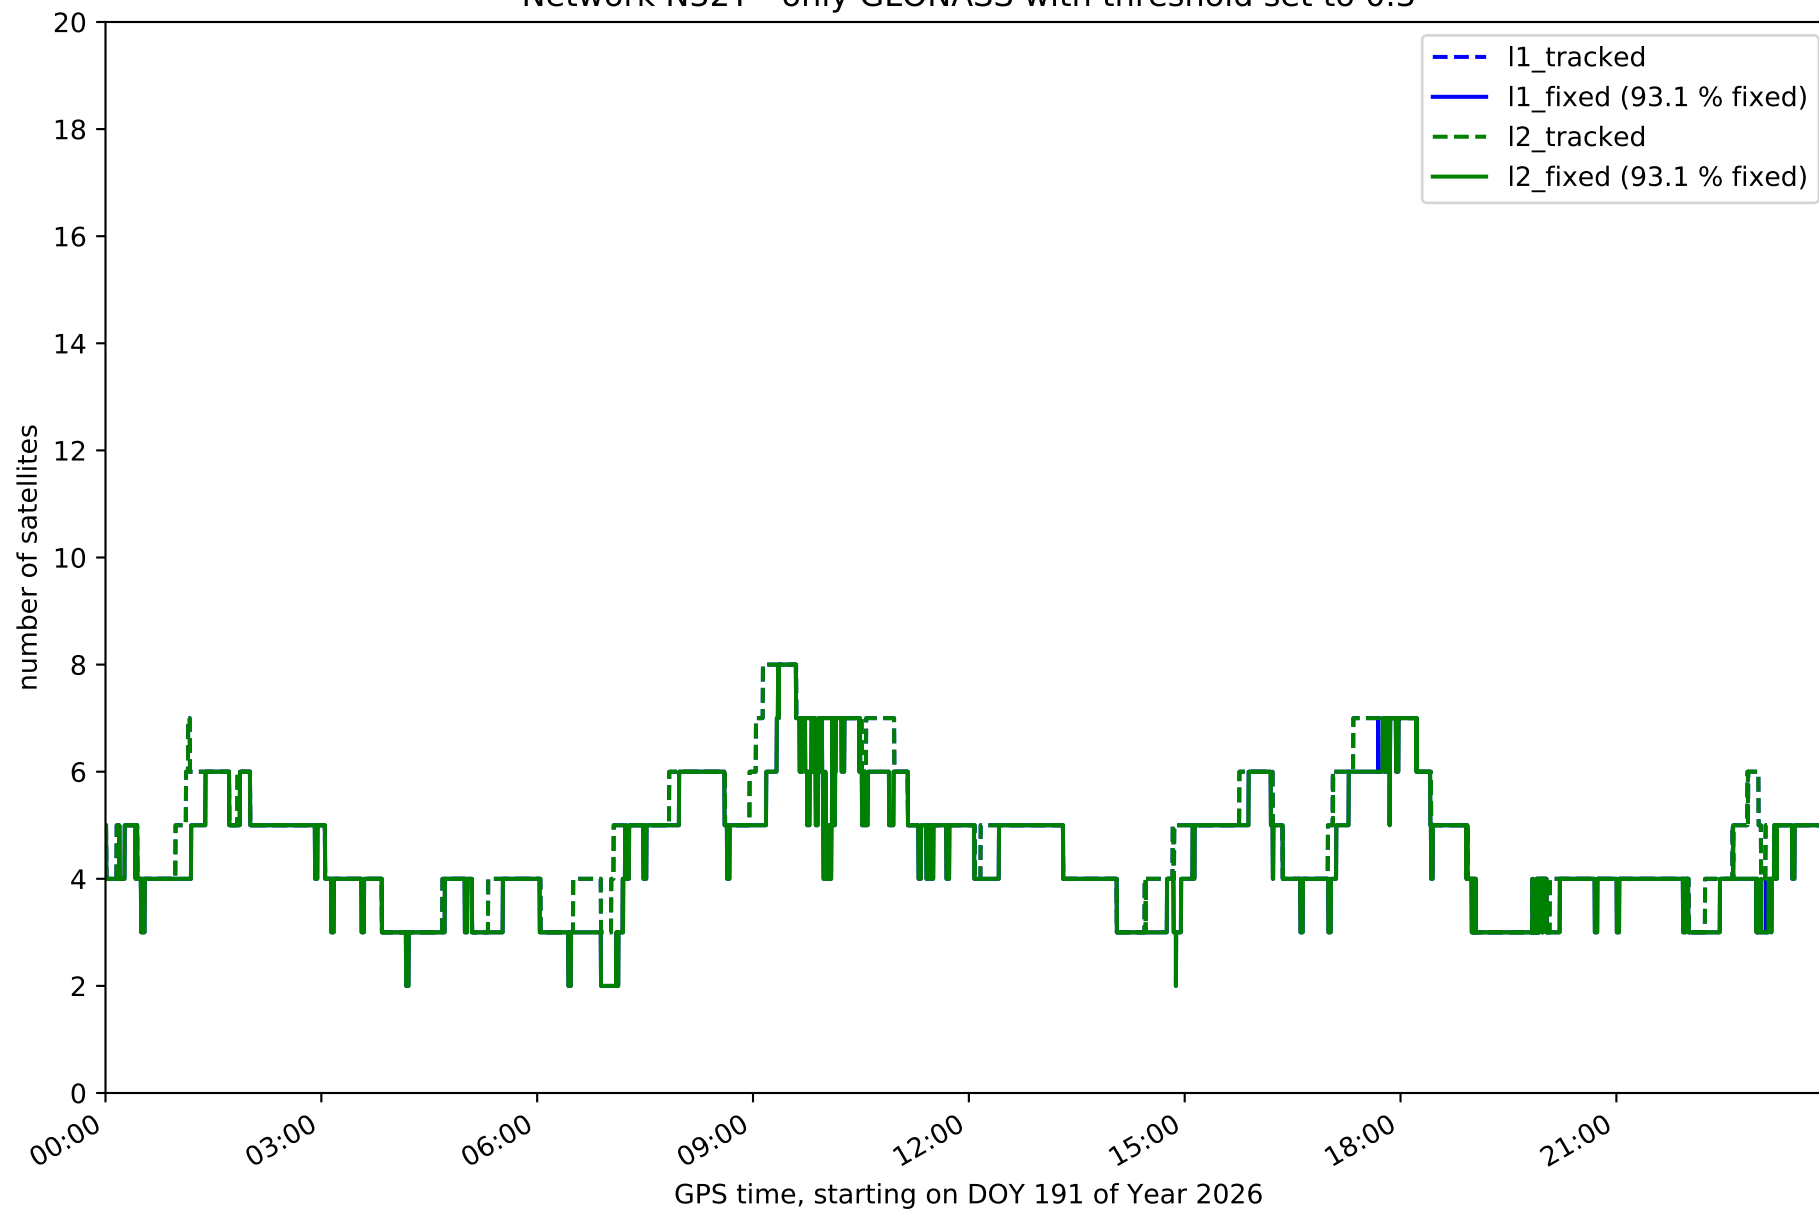


Network N32T - only BDS with threshold set to 0.3

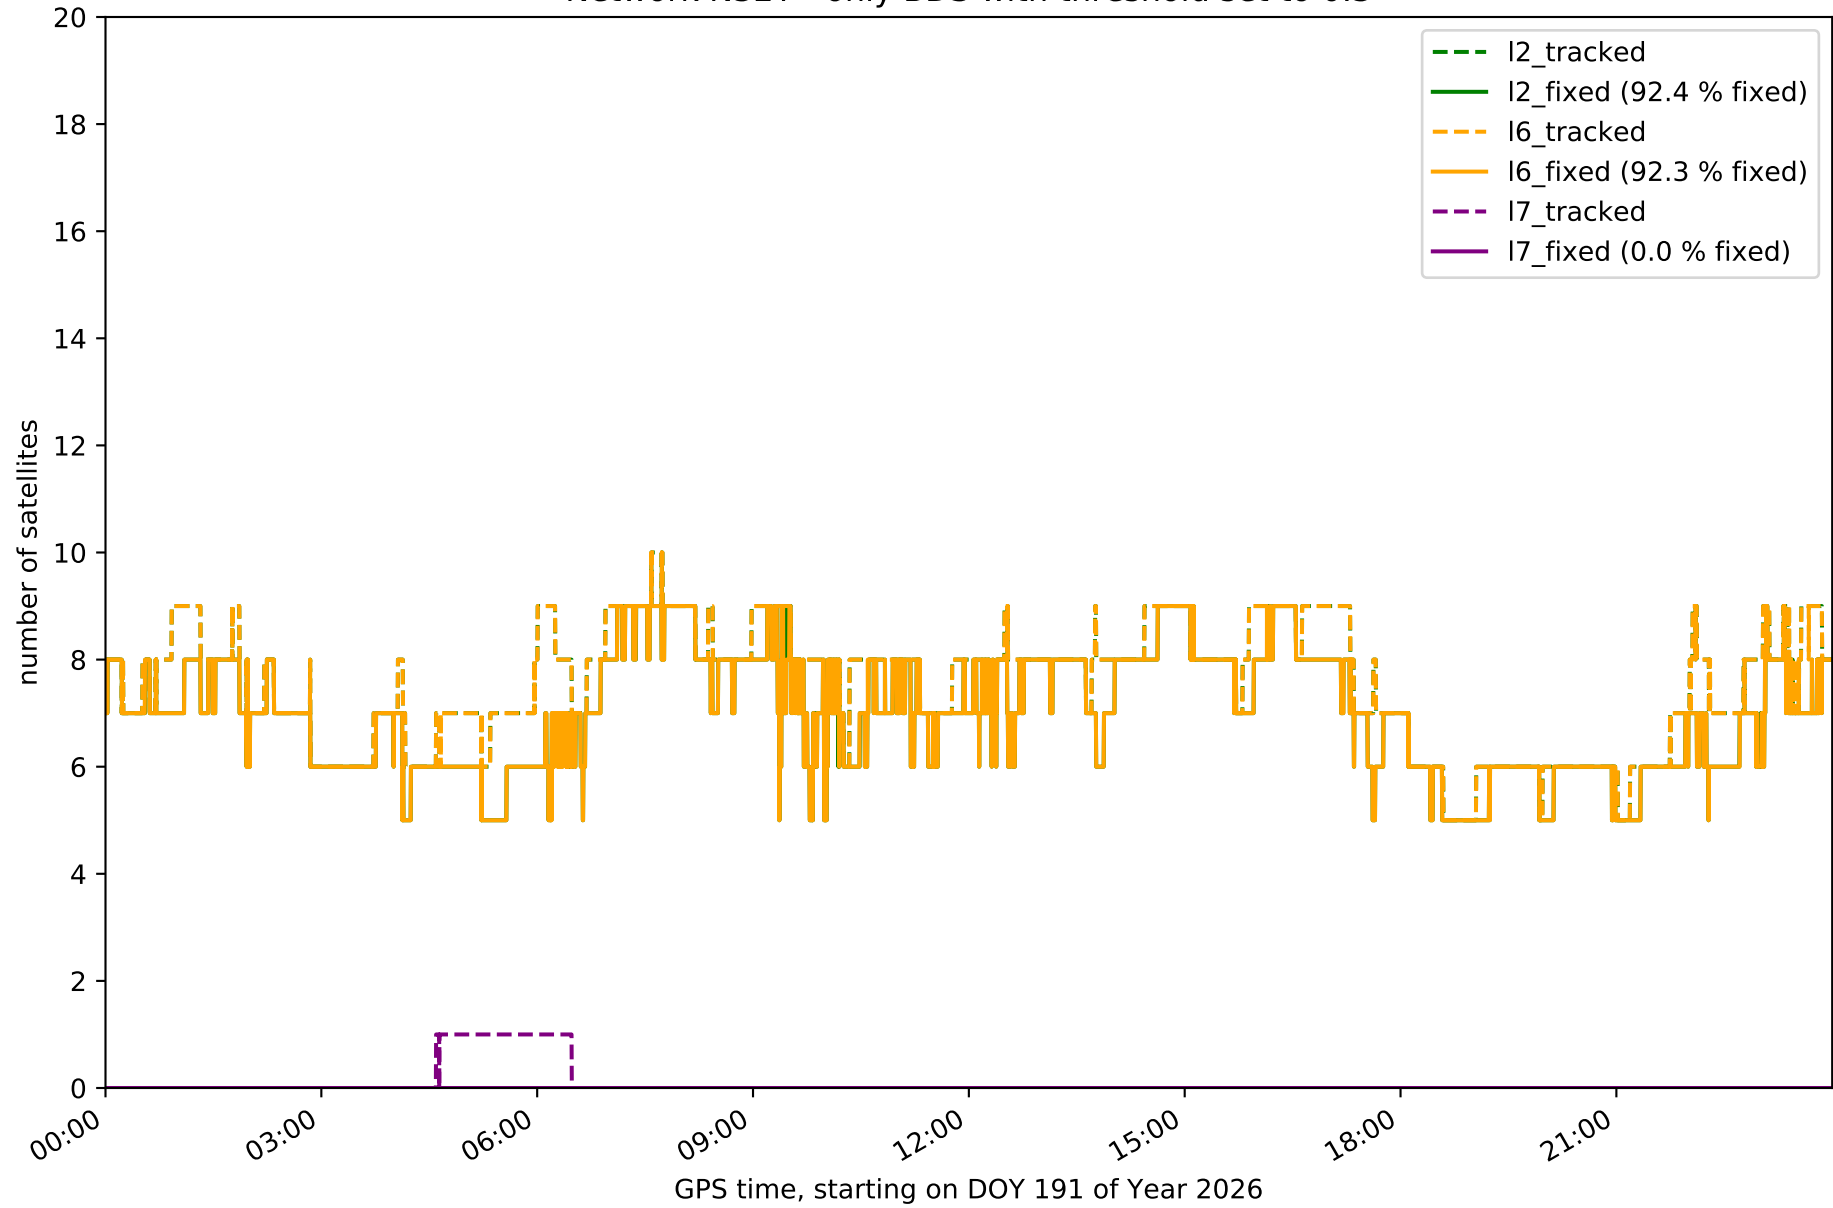


Network N32T - only Galileo with threshold set to 0.3

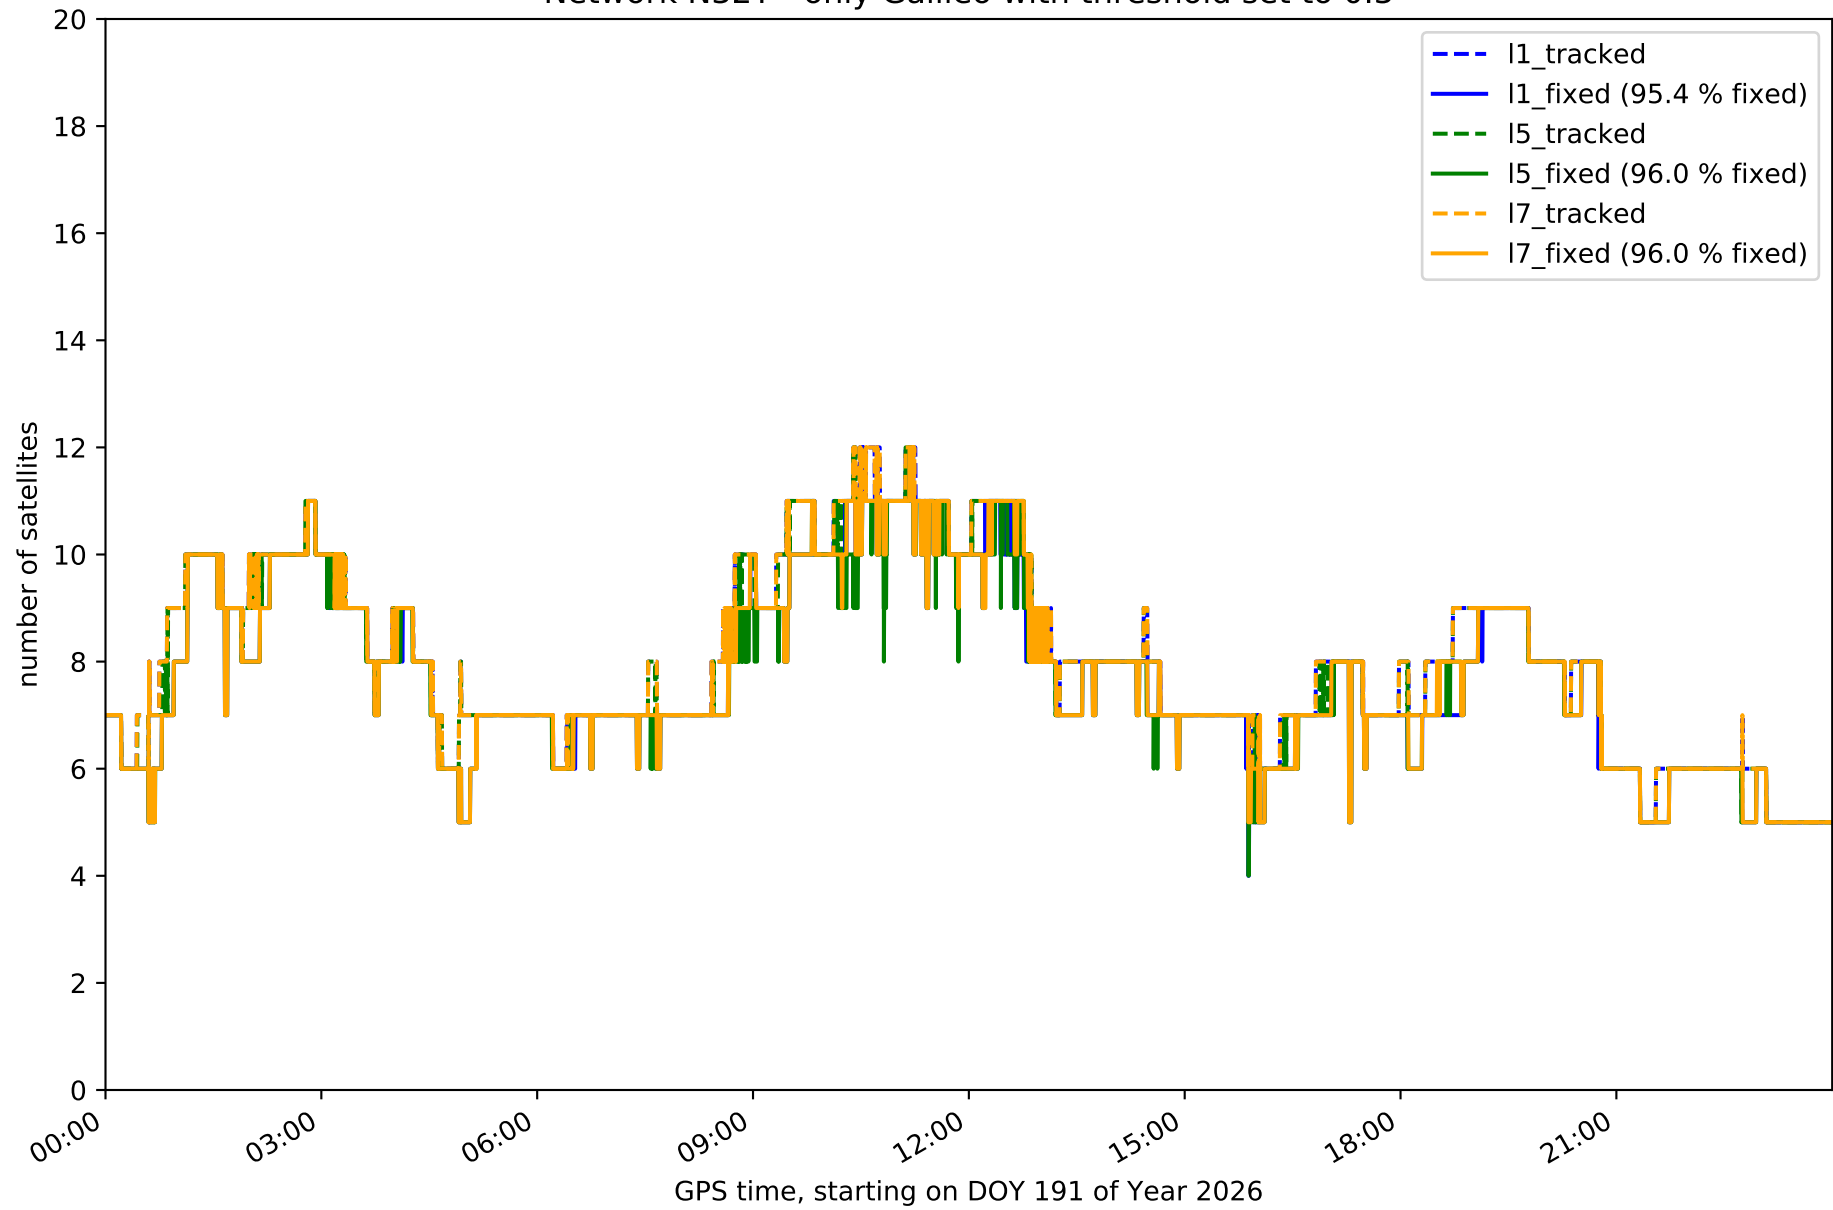


Station EH01 in network N32T

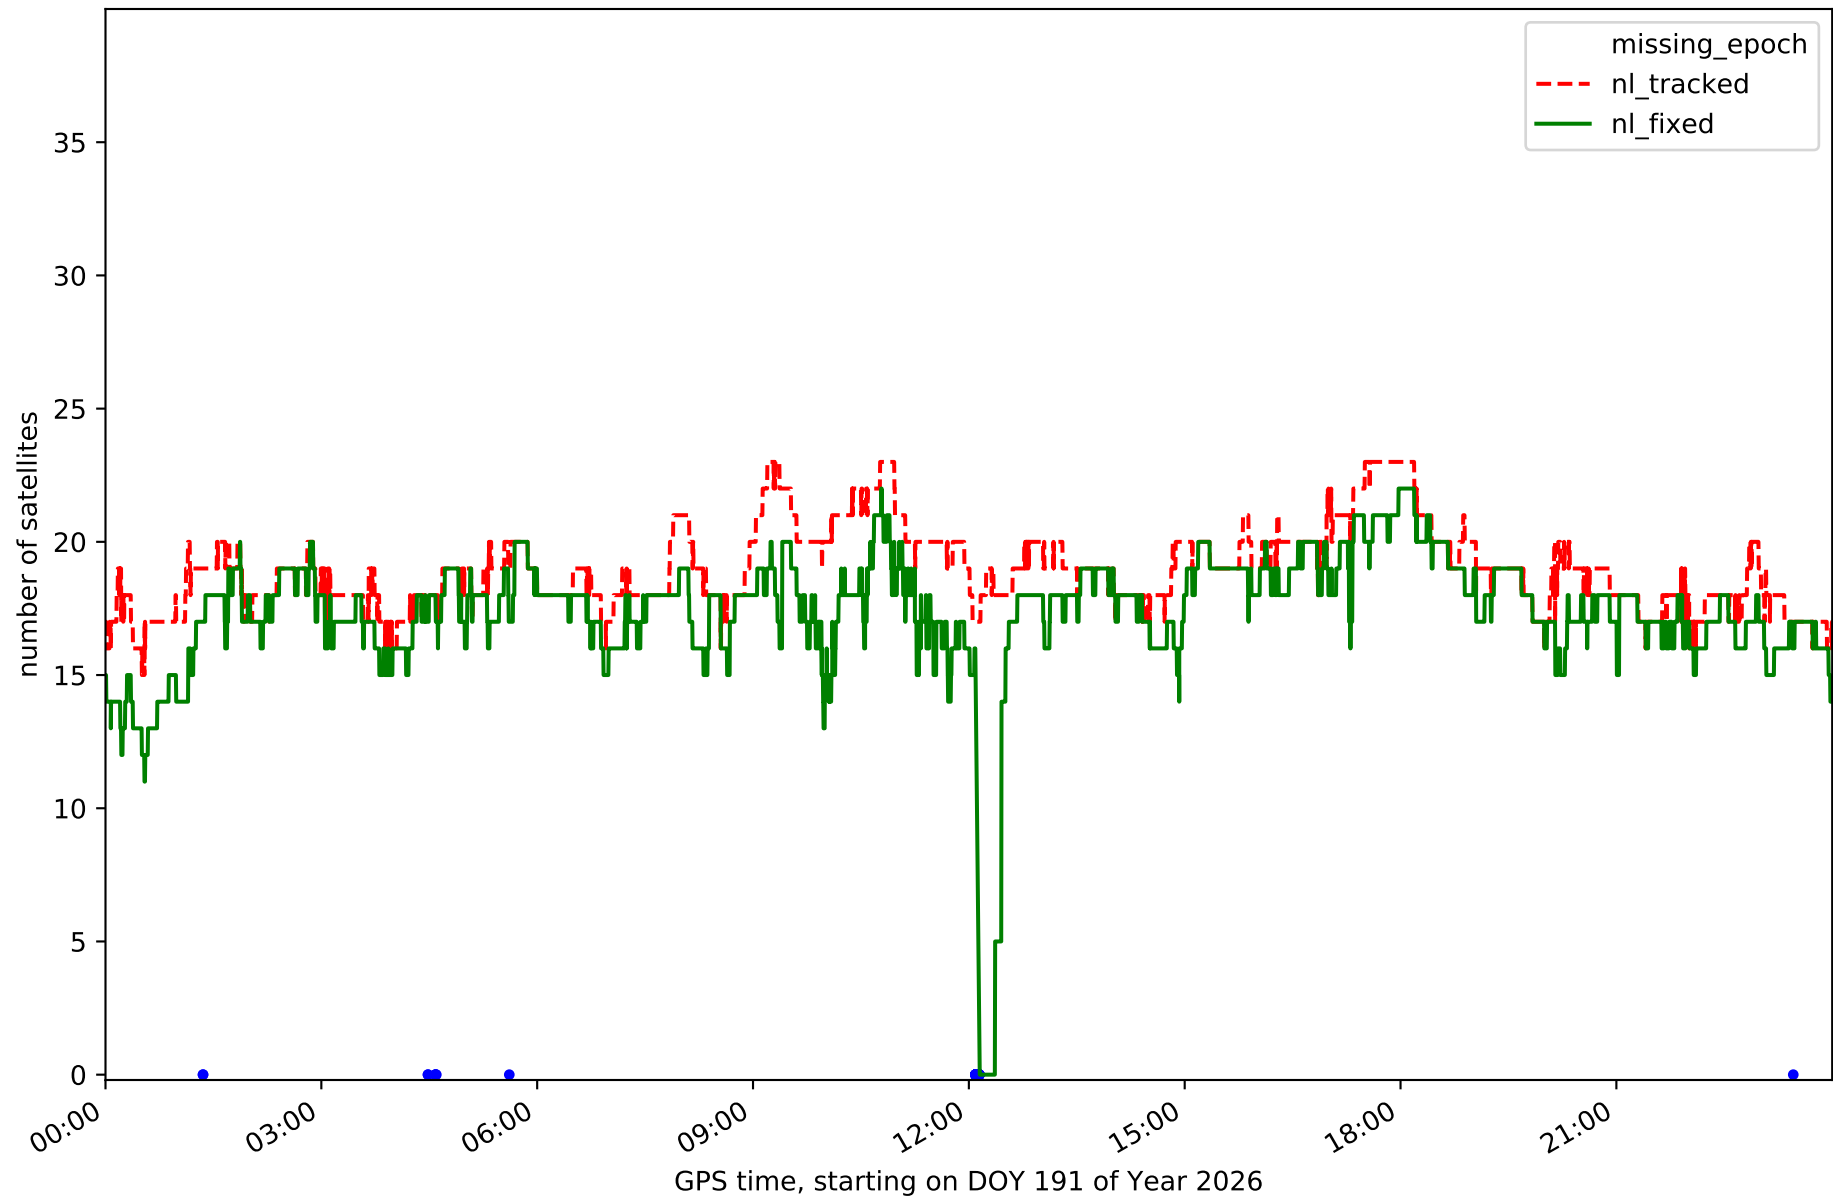


Station EH02 in network N32T

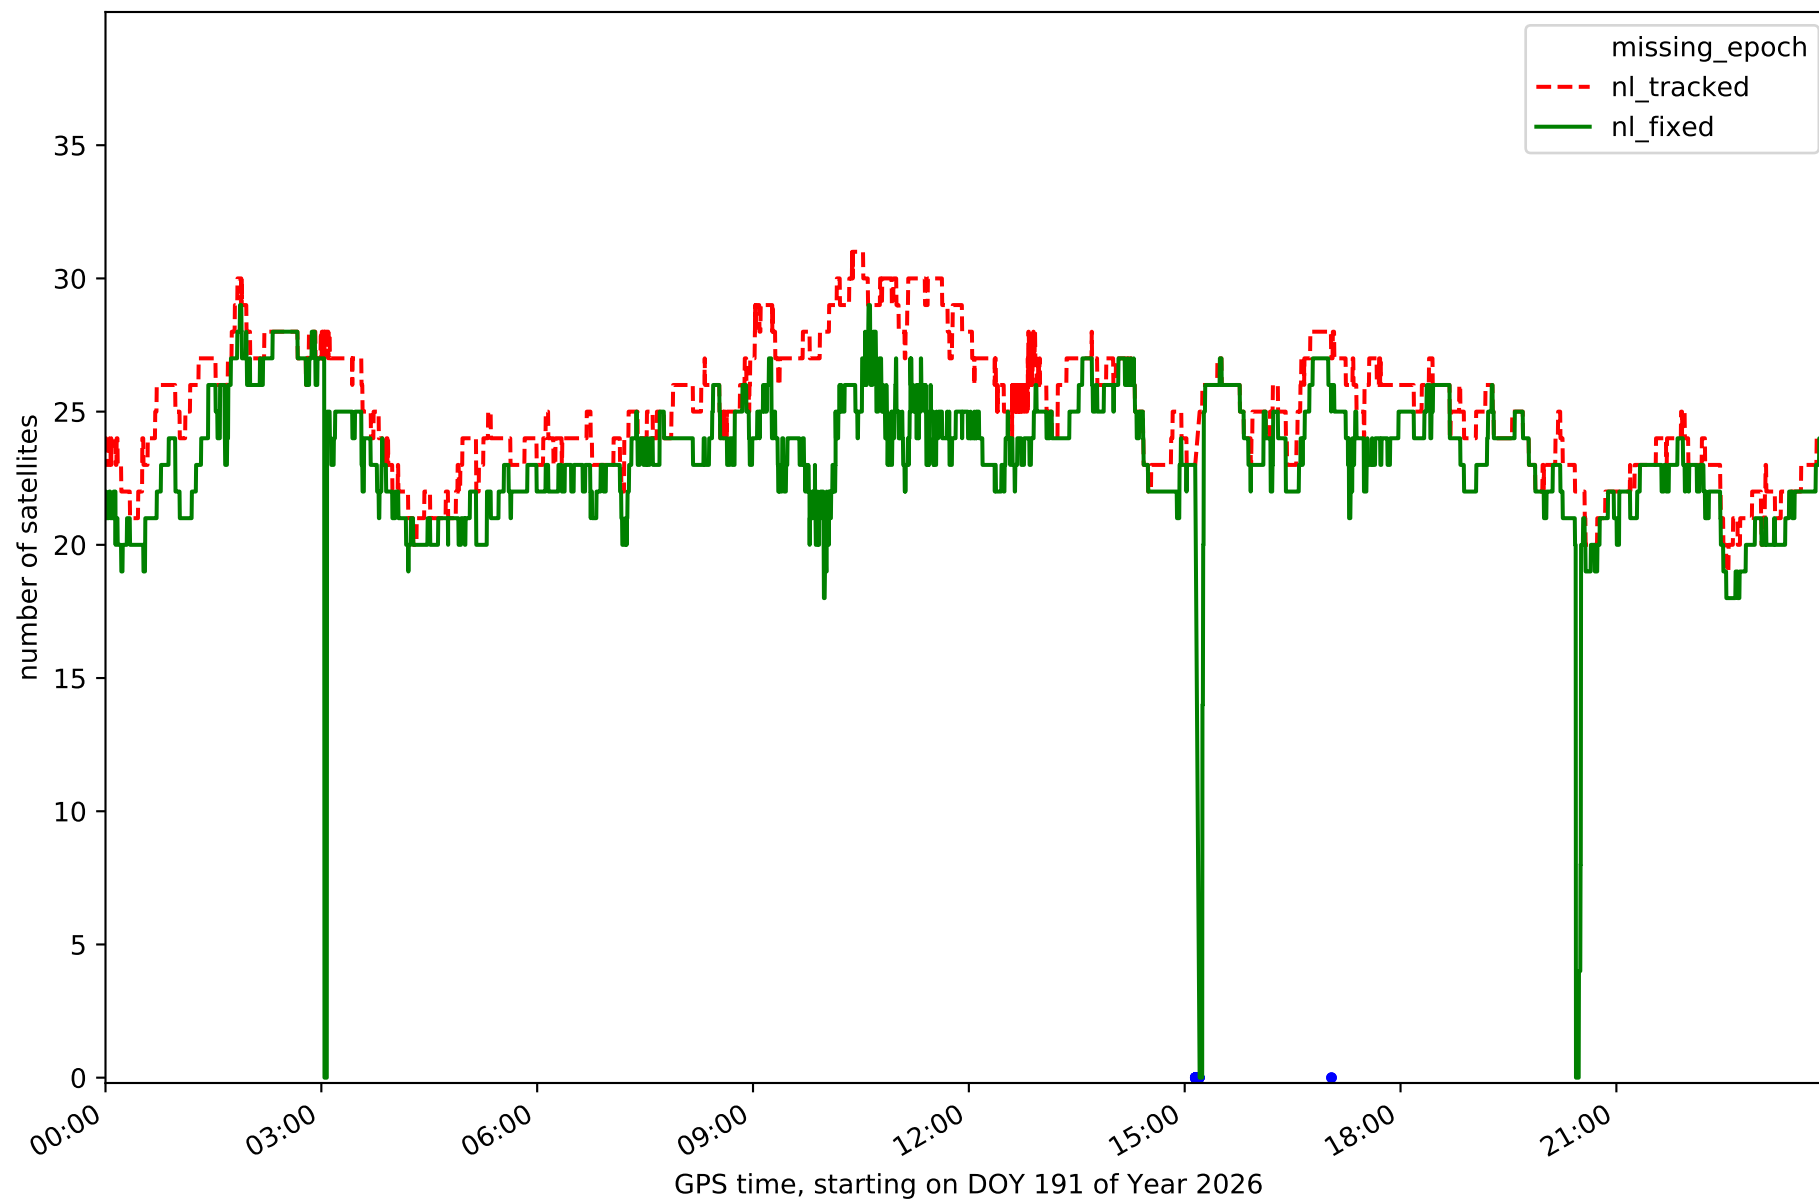


Station GOM1 in network N32T

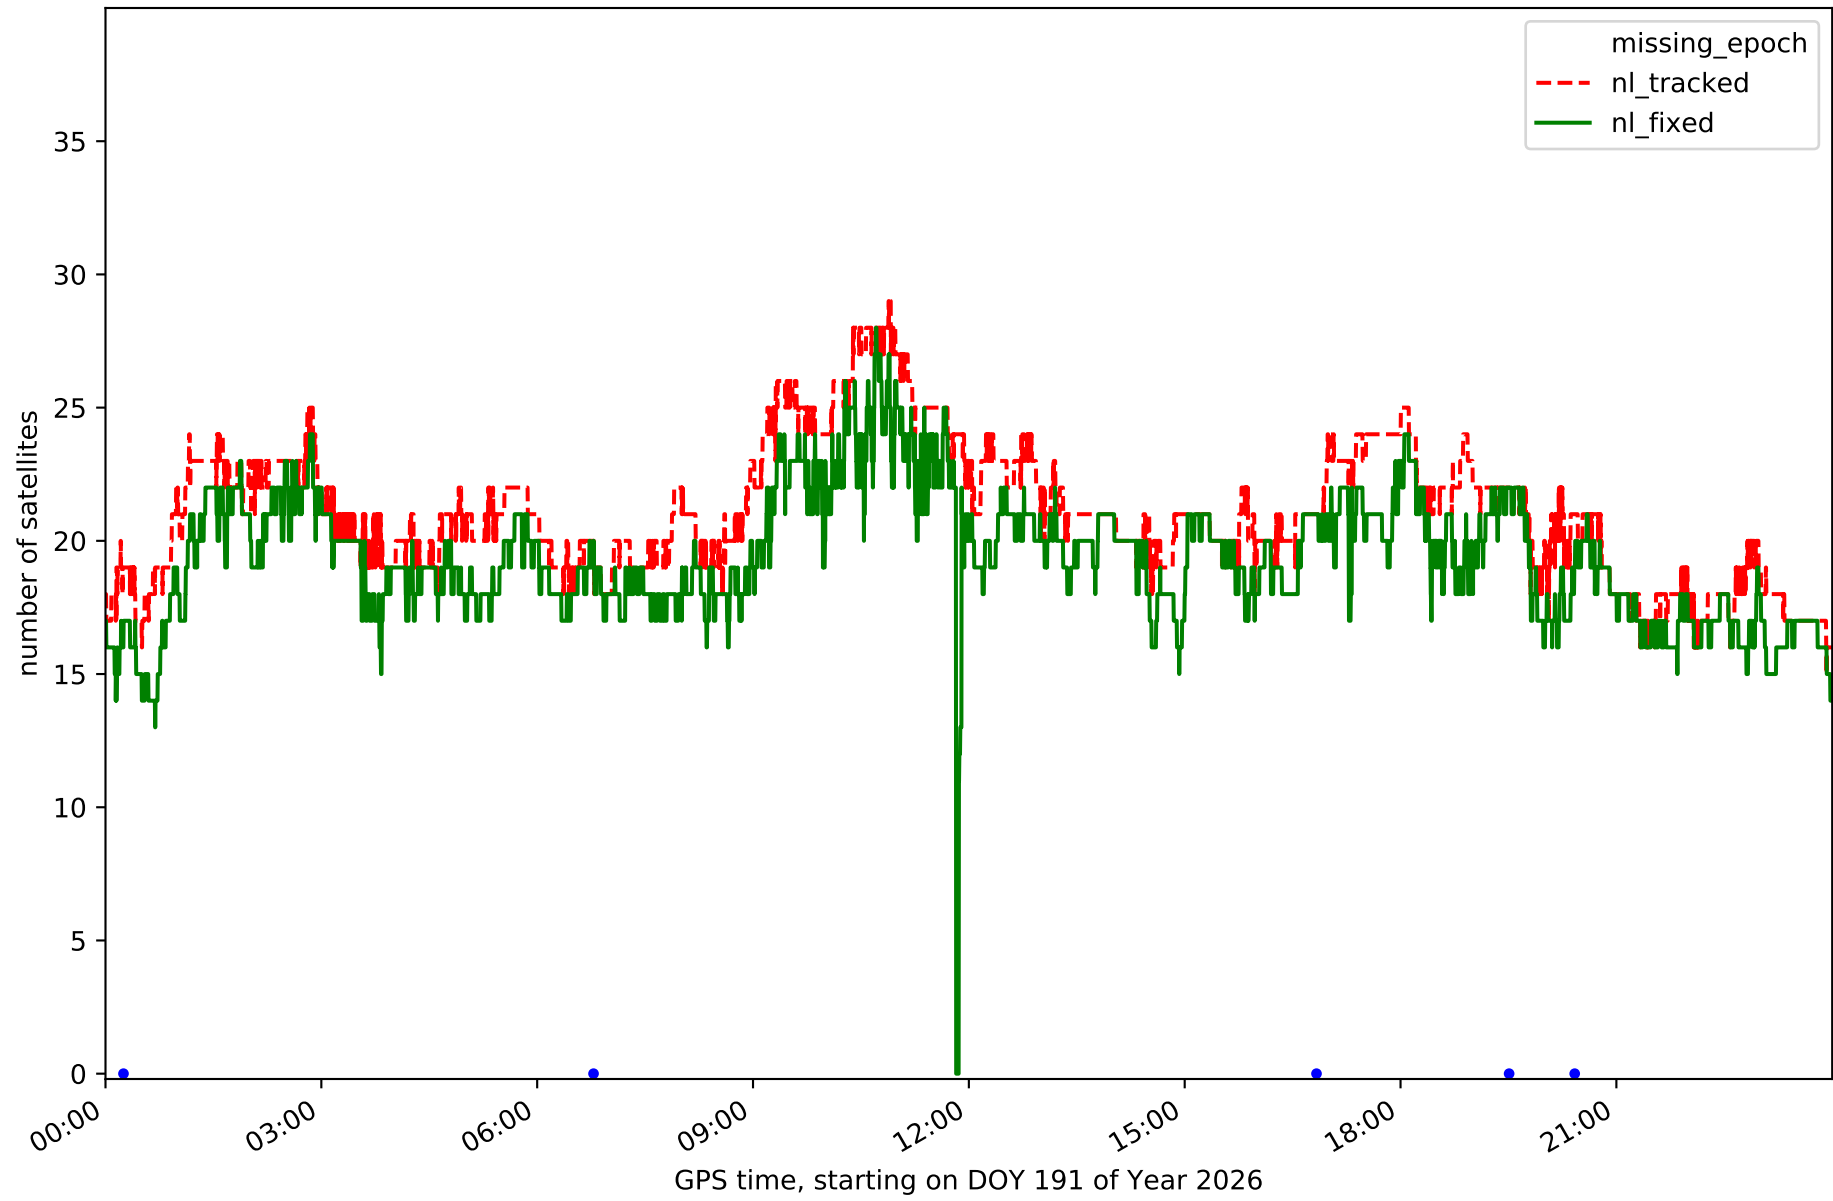


Station GOME in network N32T

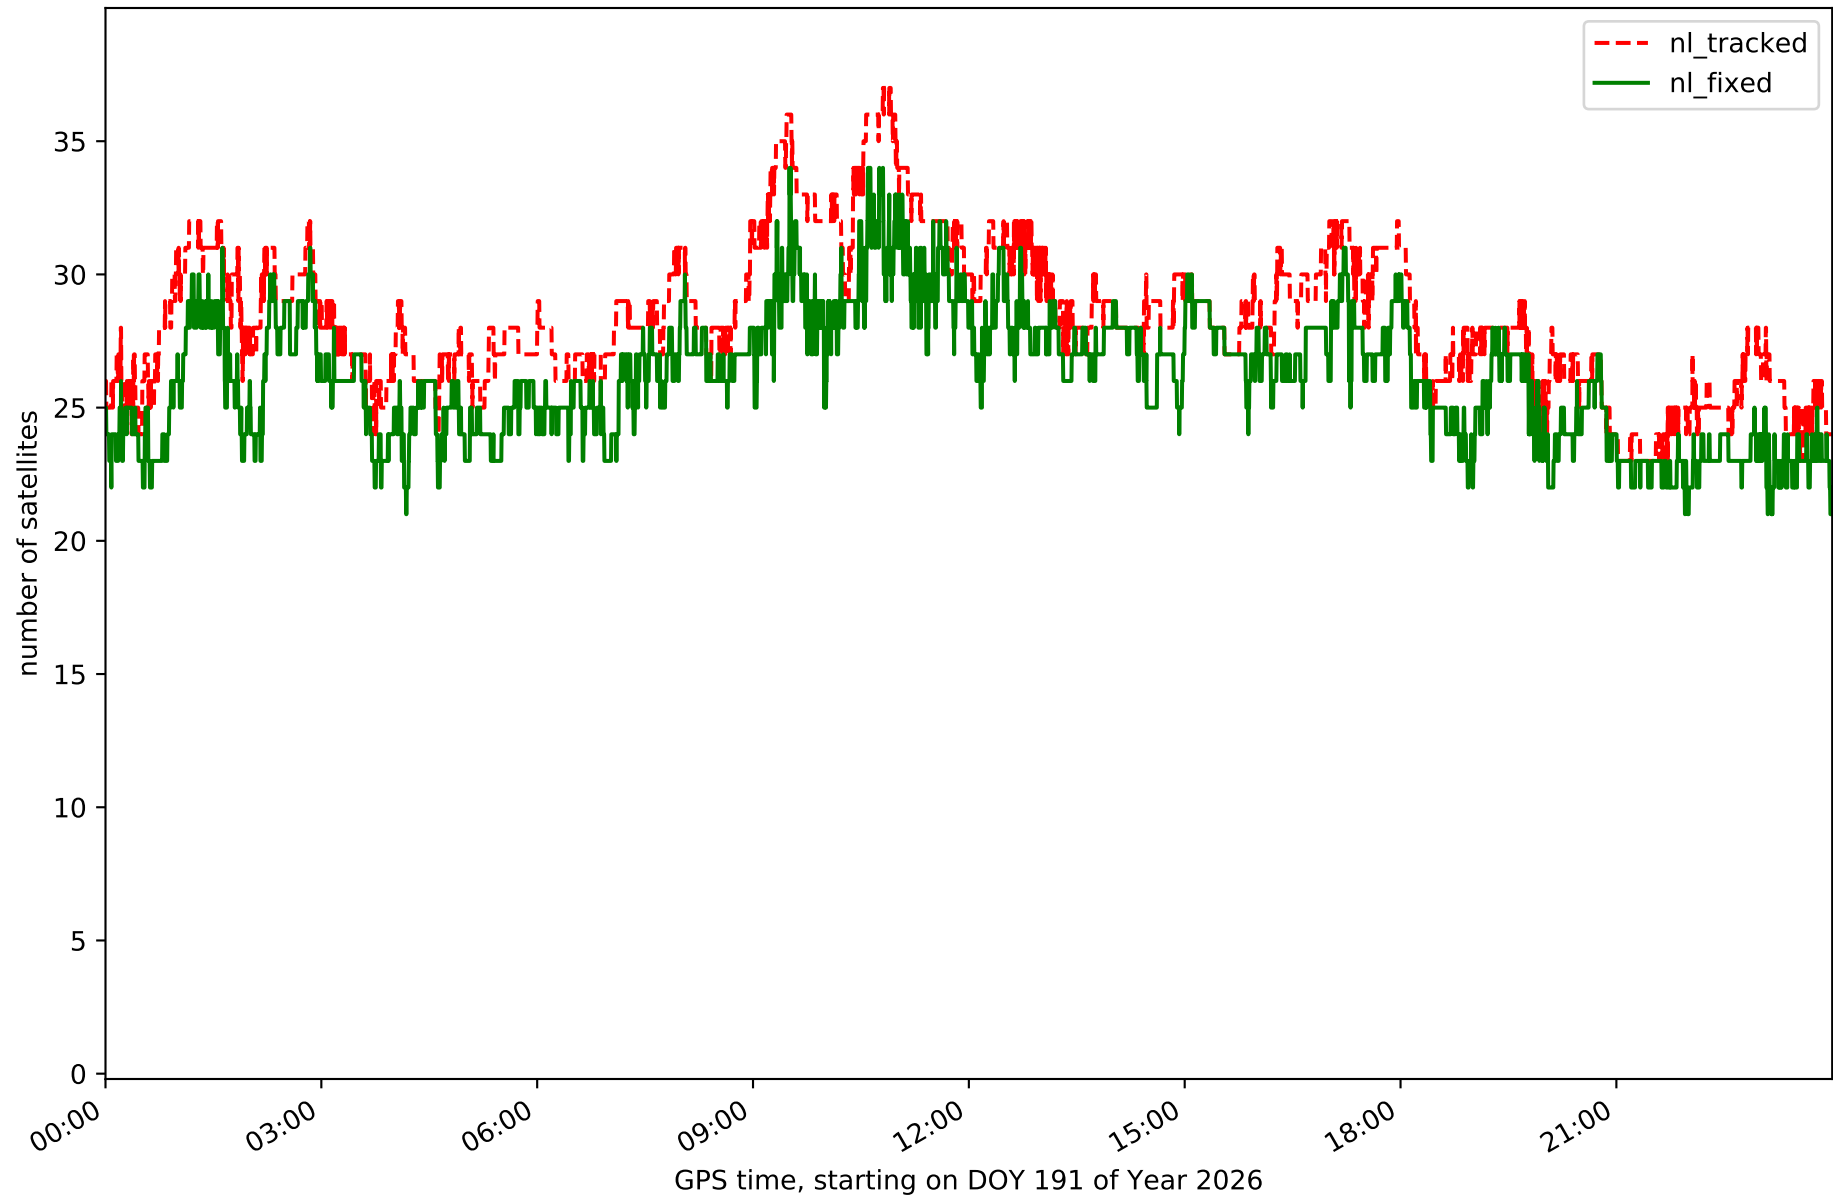


Station IZAN in network N32T

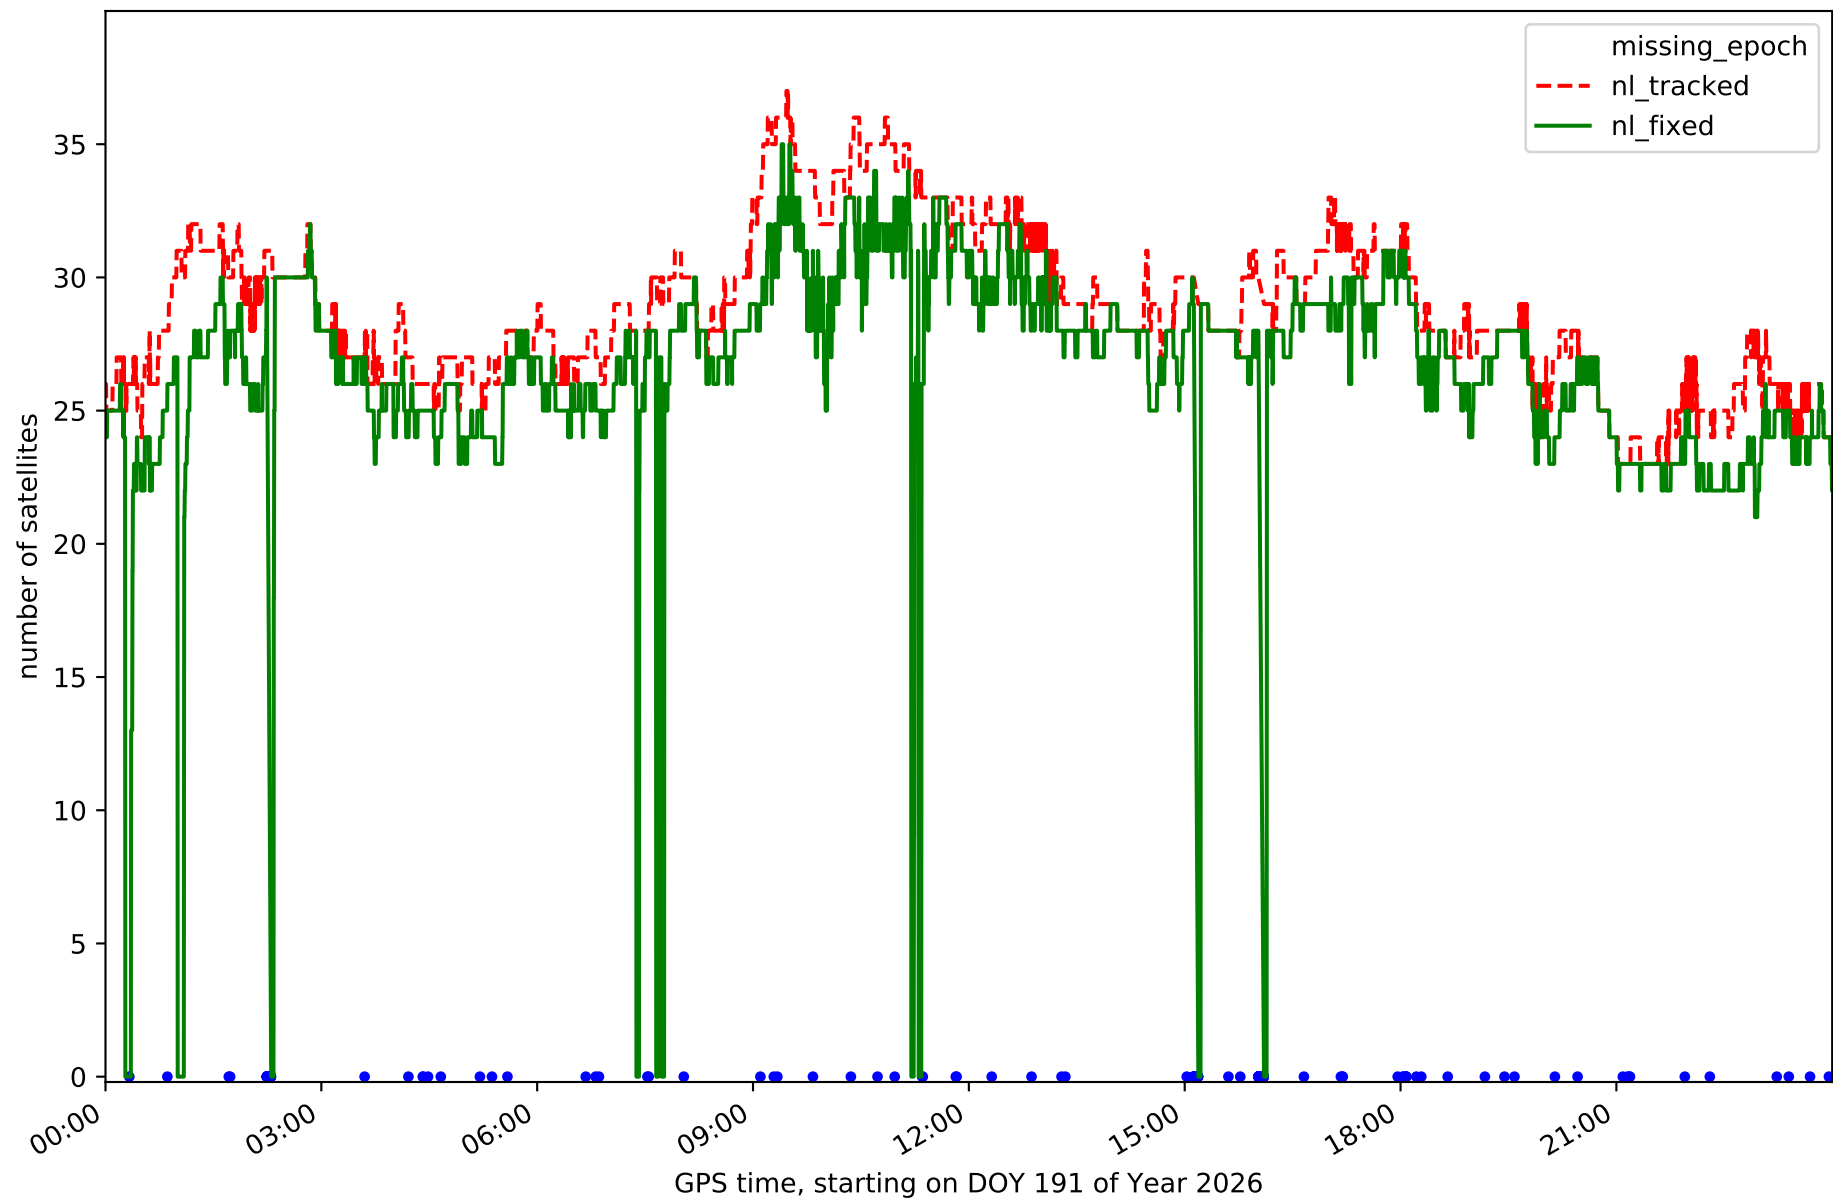


Station LP01 in network N32T

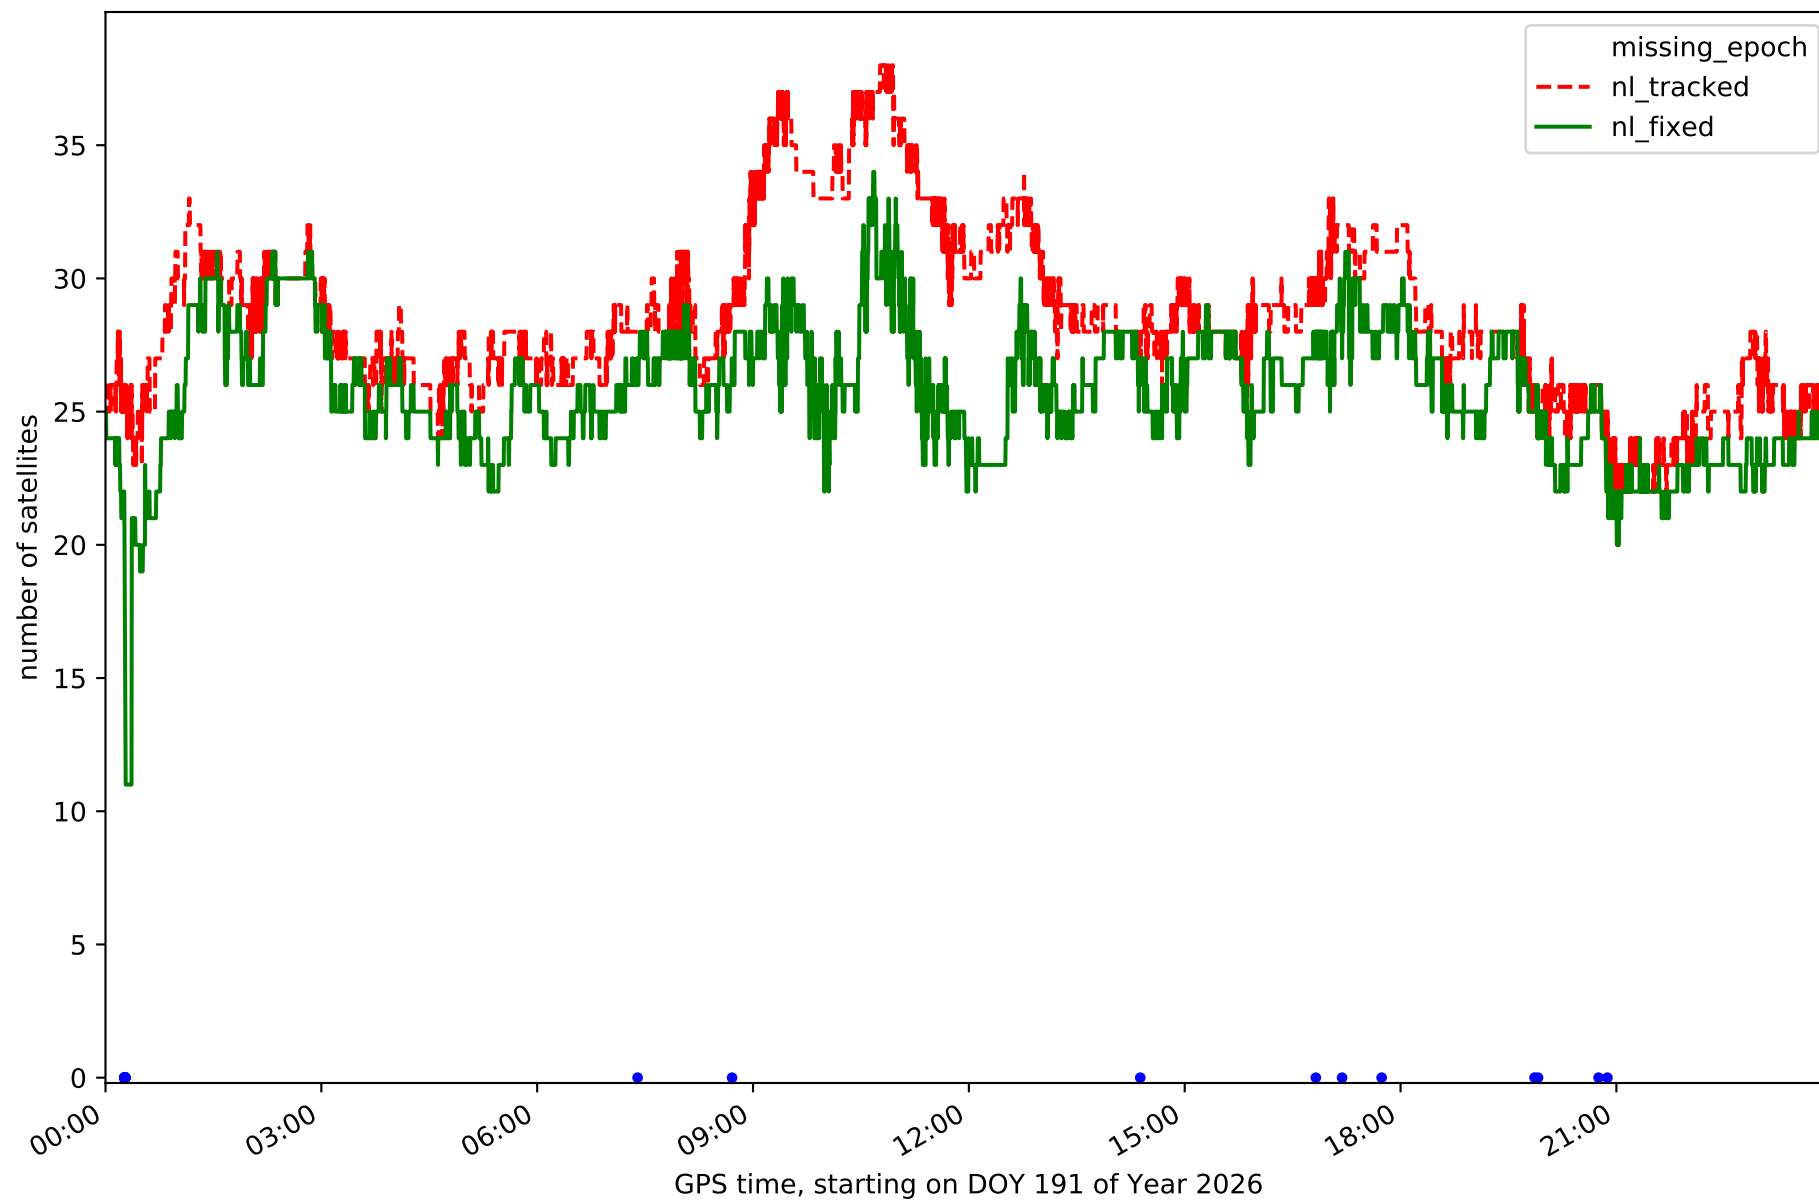


Station LP03 in network N32T

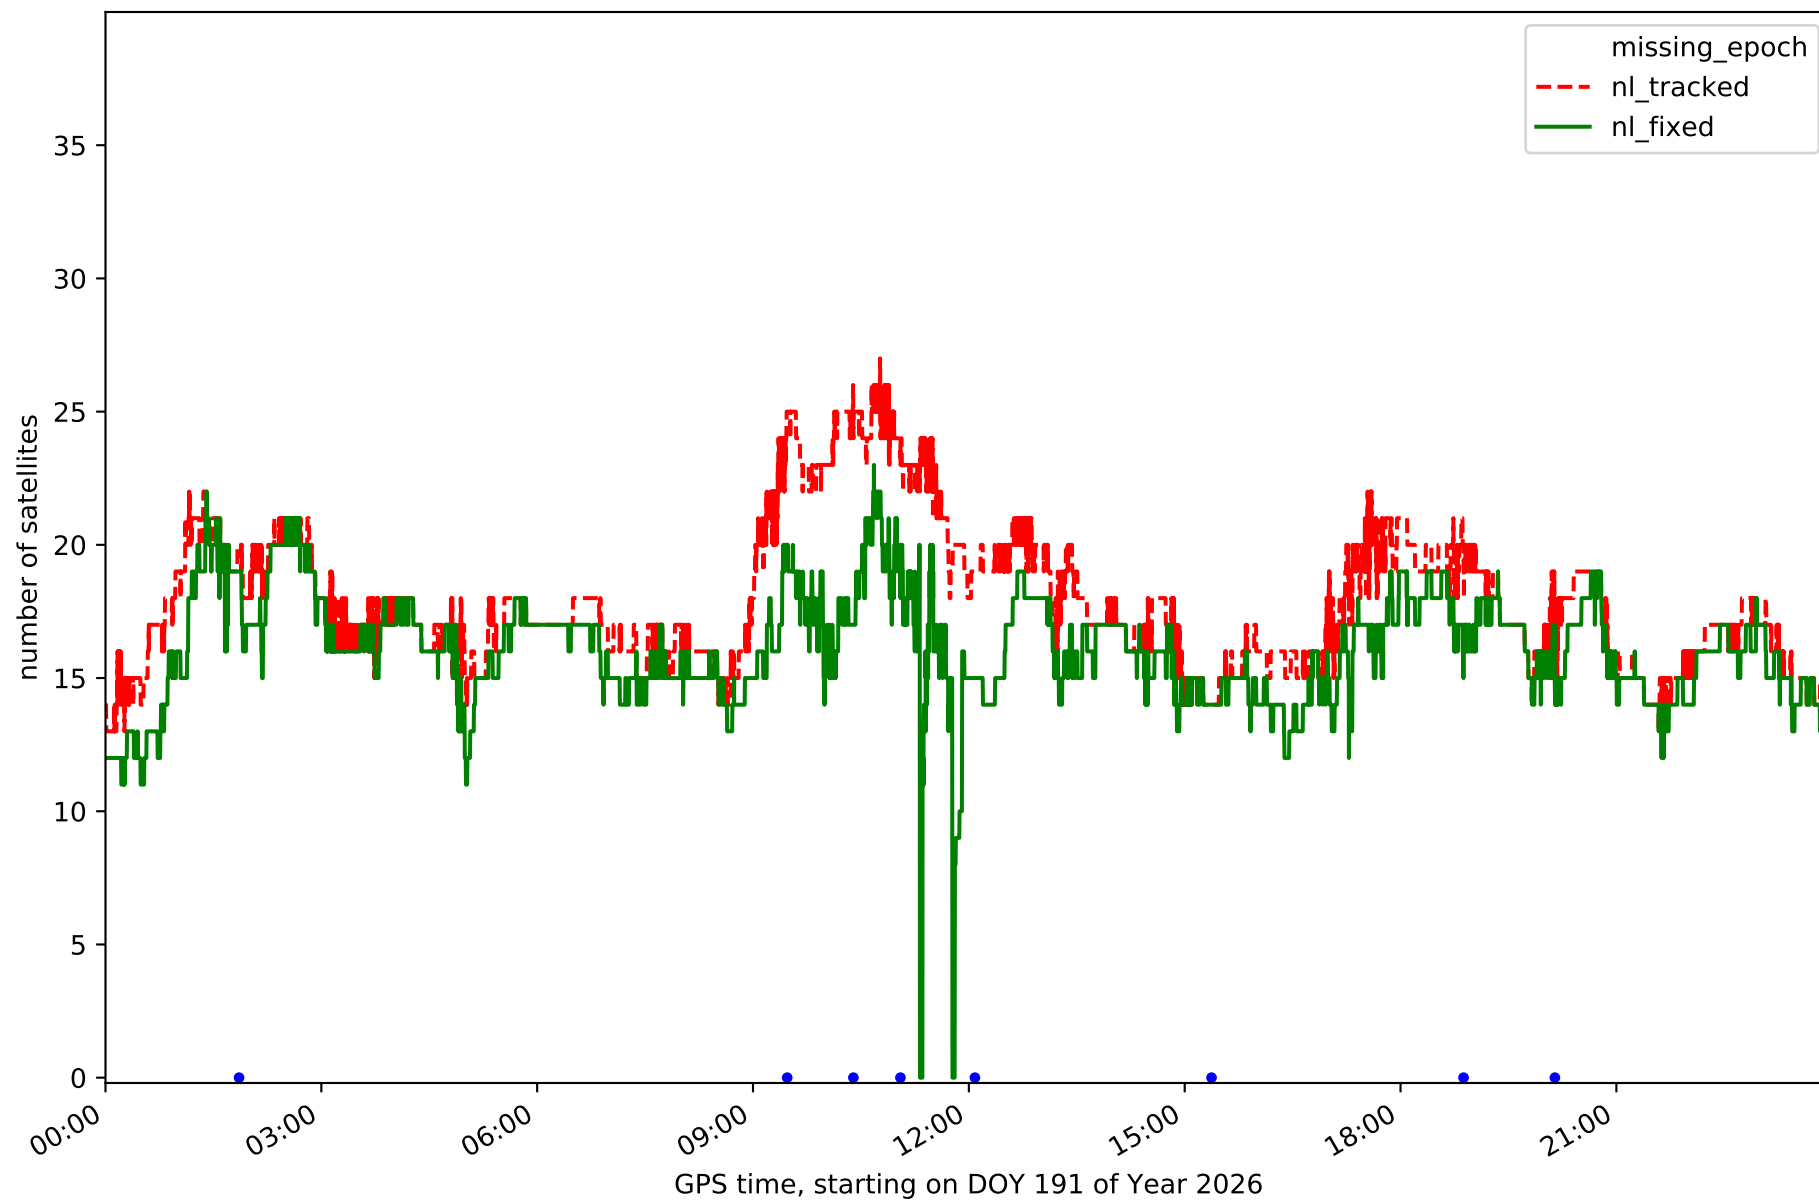


Station LPAL in network N32T

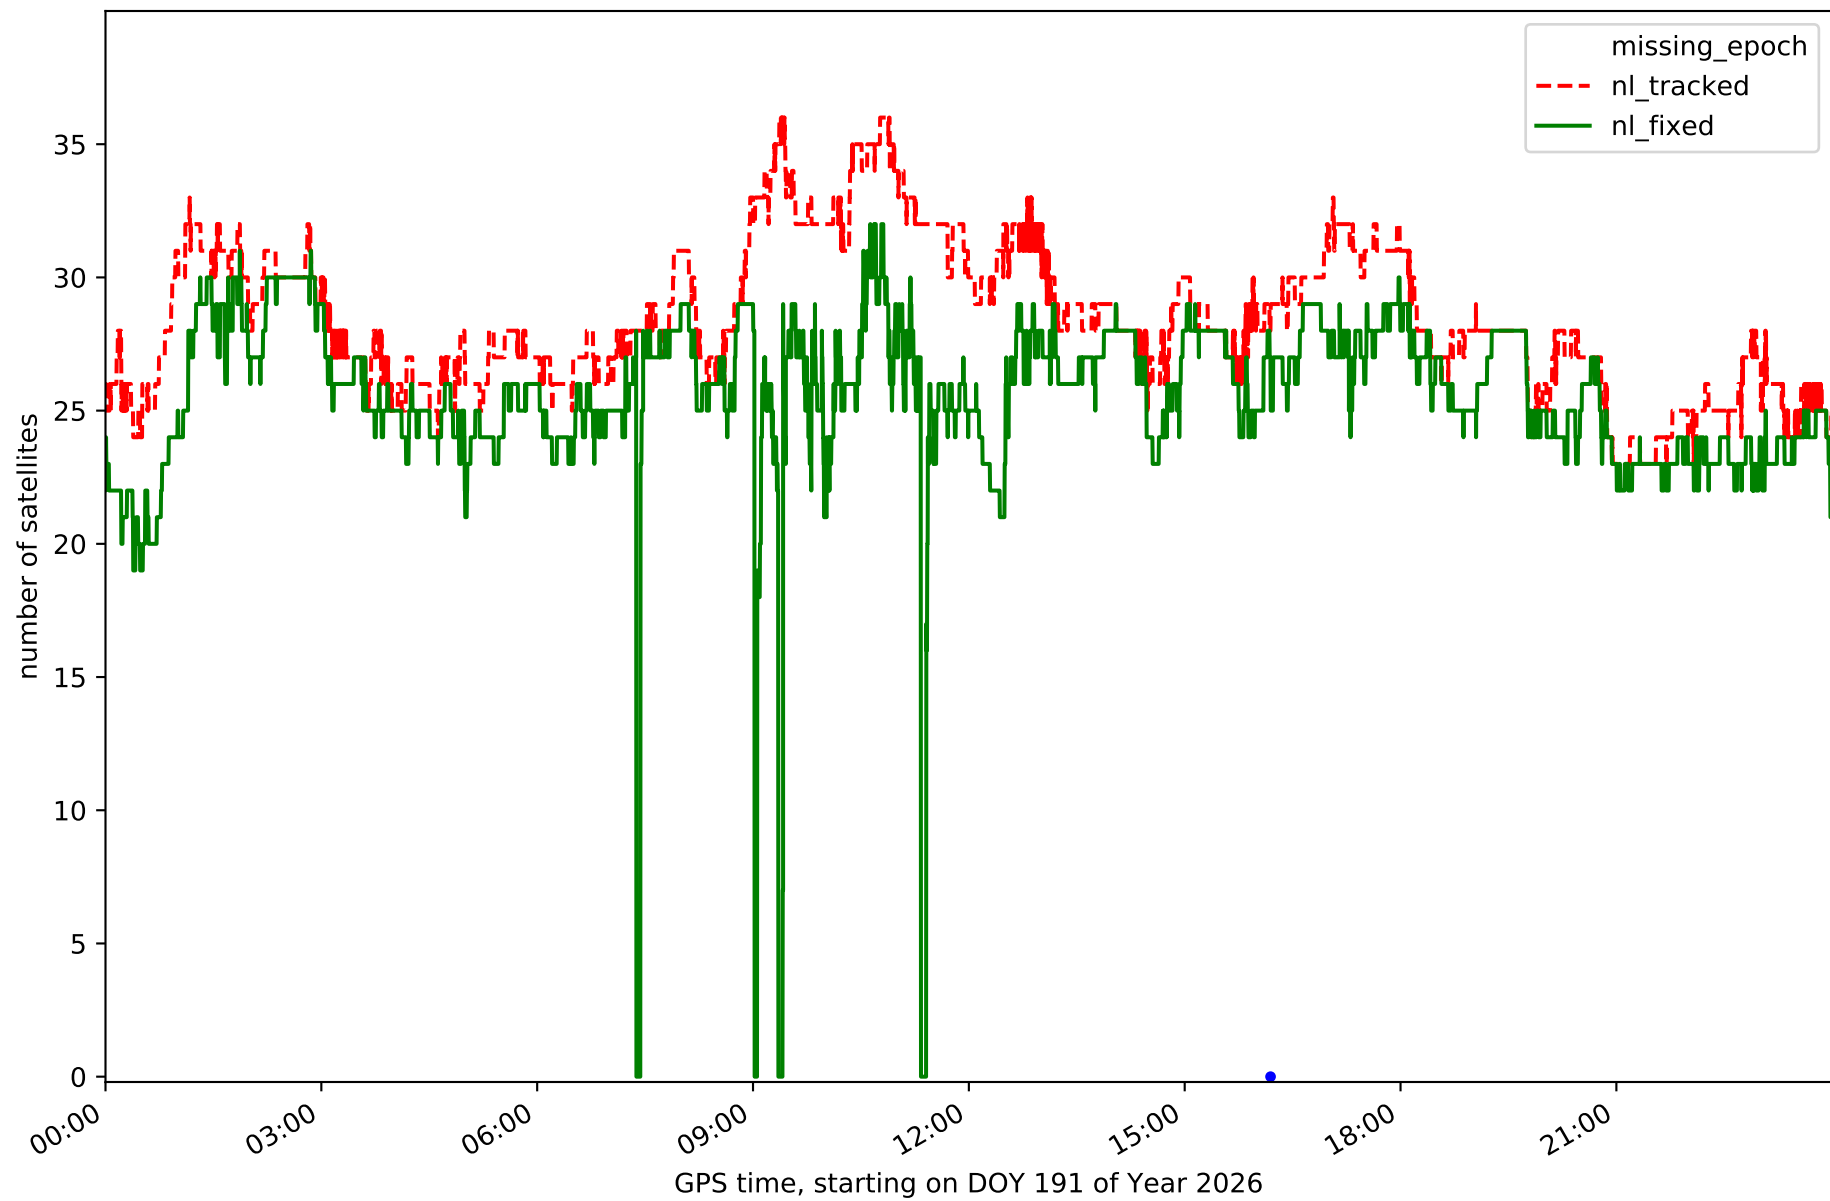


Station LRES in network N32T

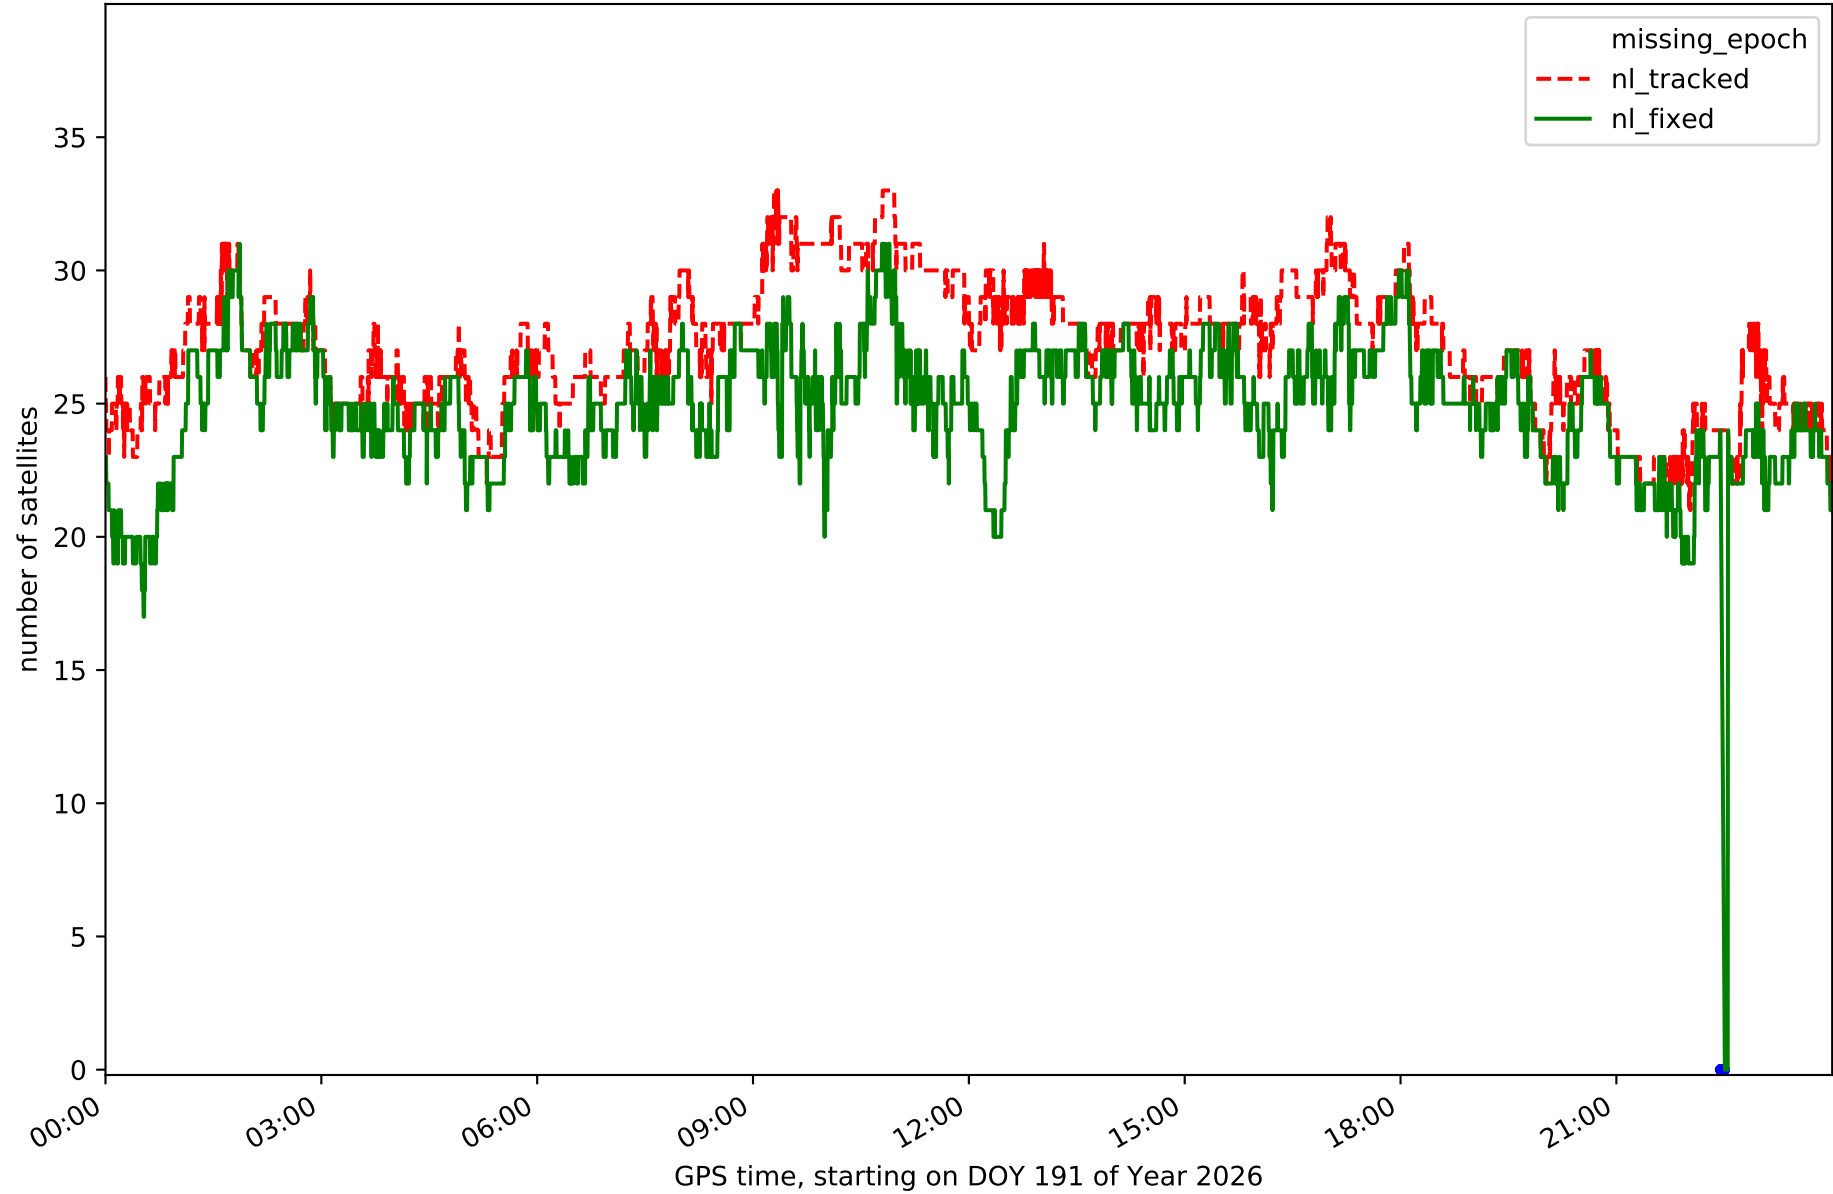


Station TN01 in network N32T

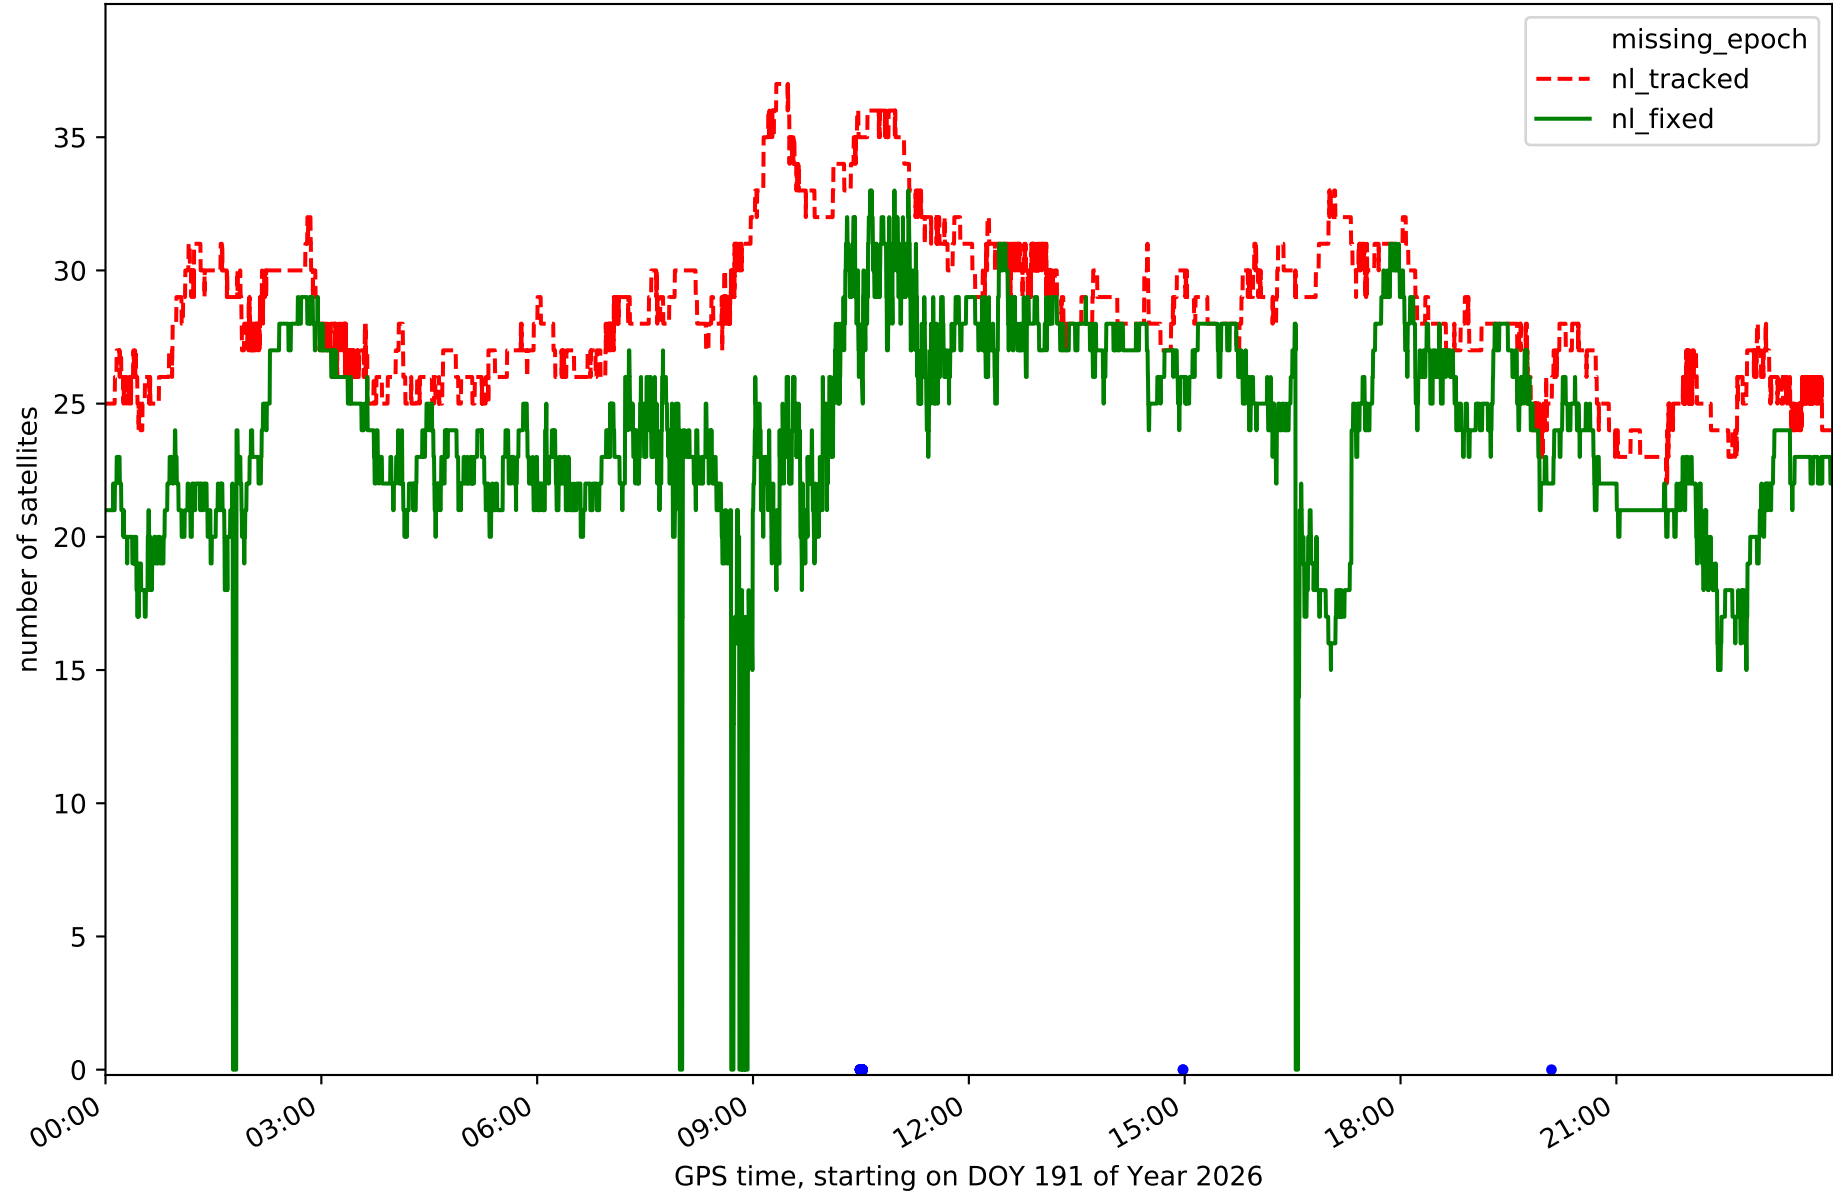


Station TN02 in network N32T

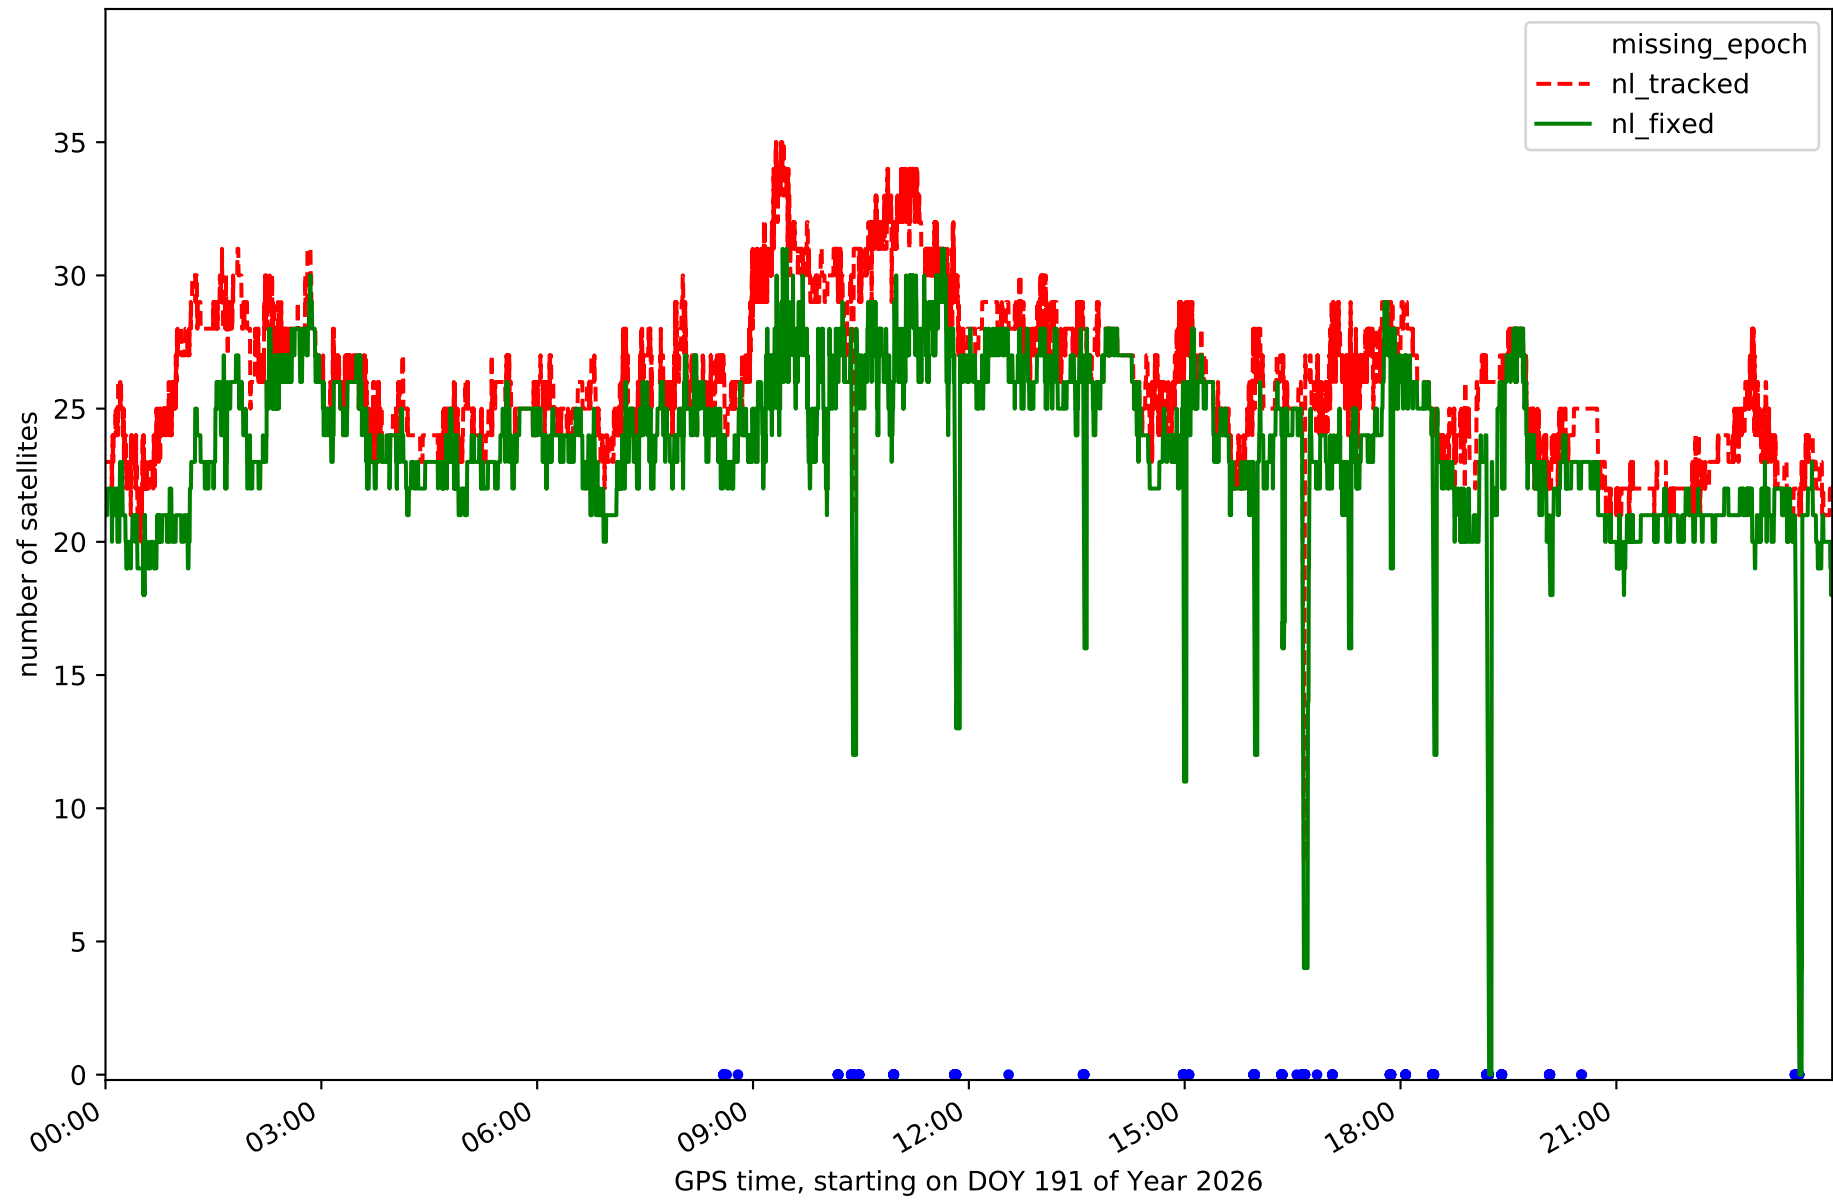


Station TN03 in network N32T

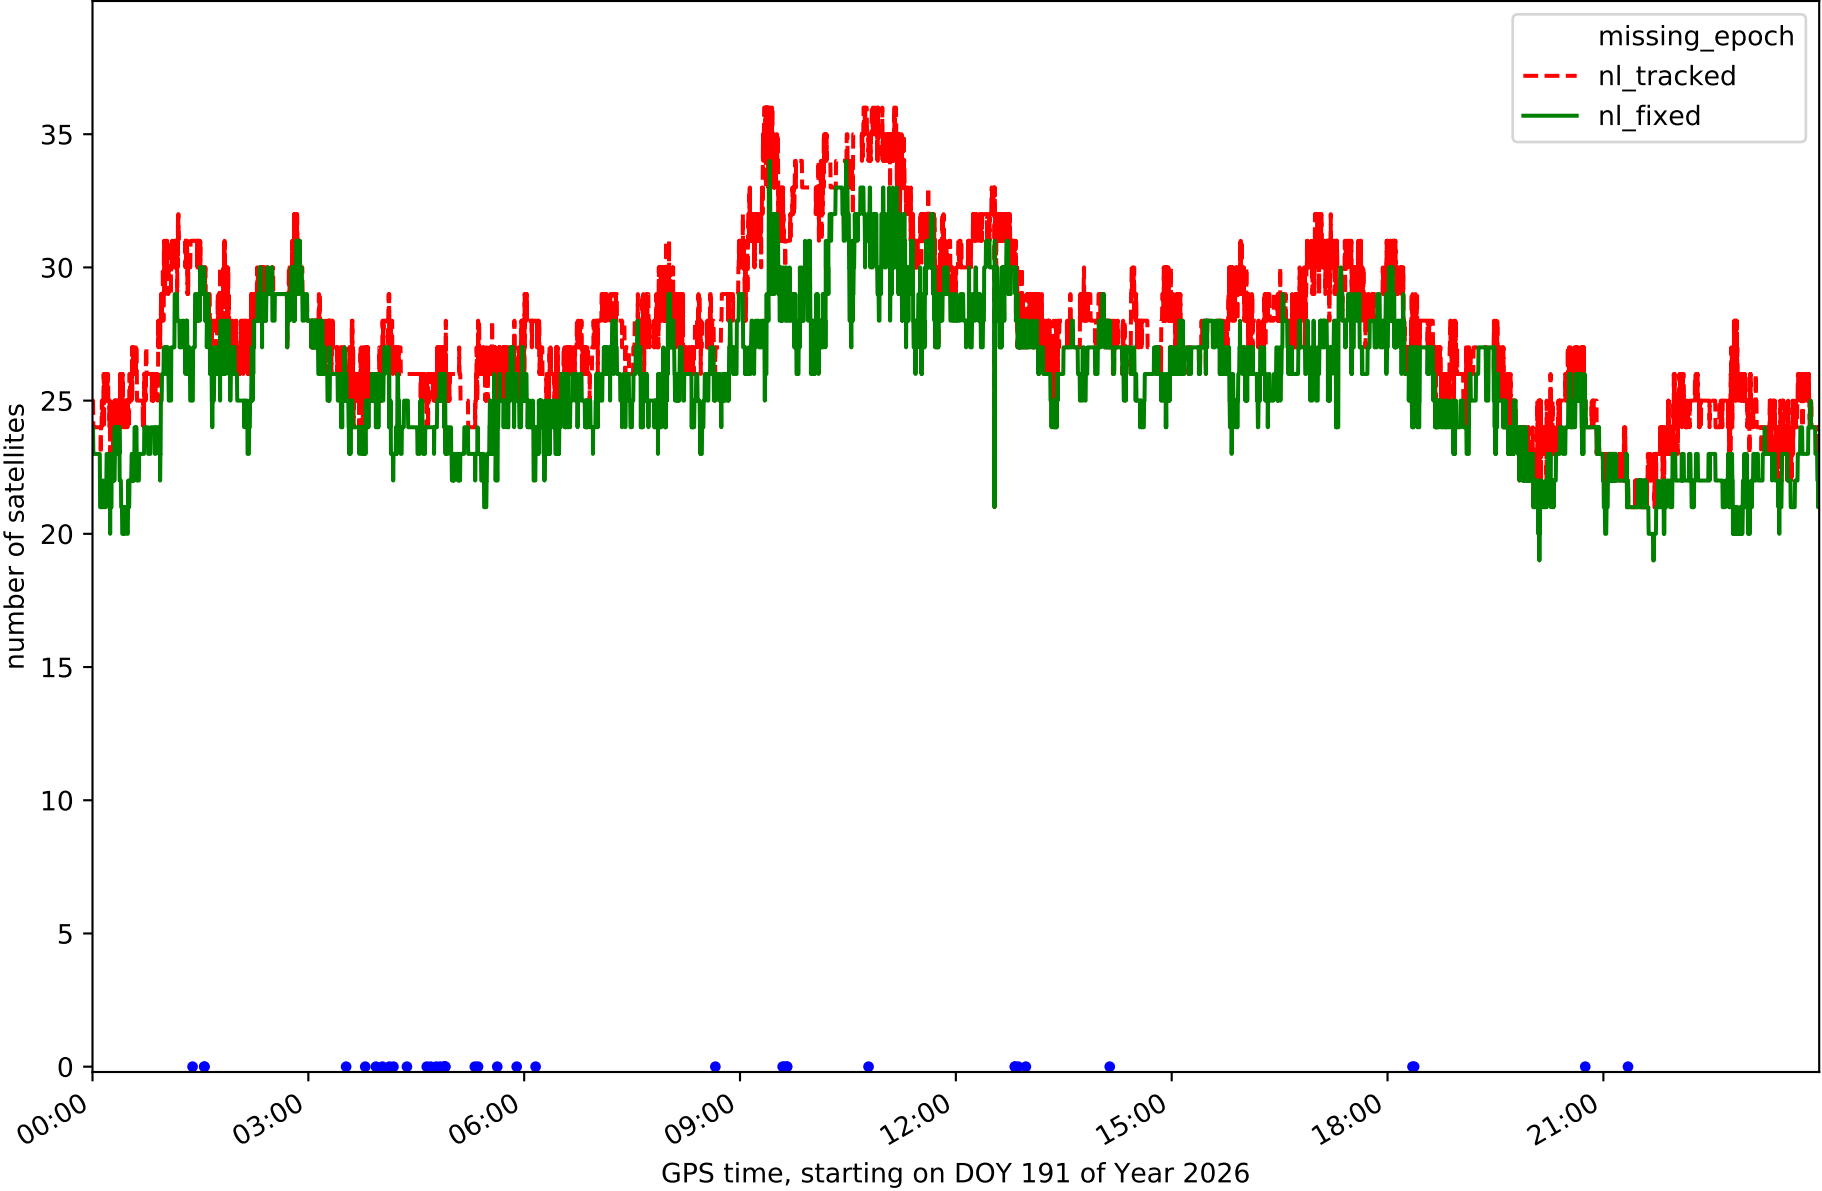


Station TN06 in network N32T

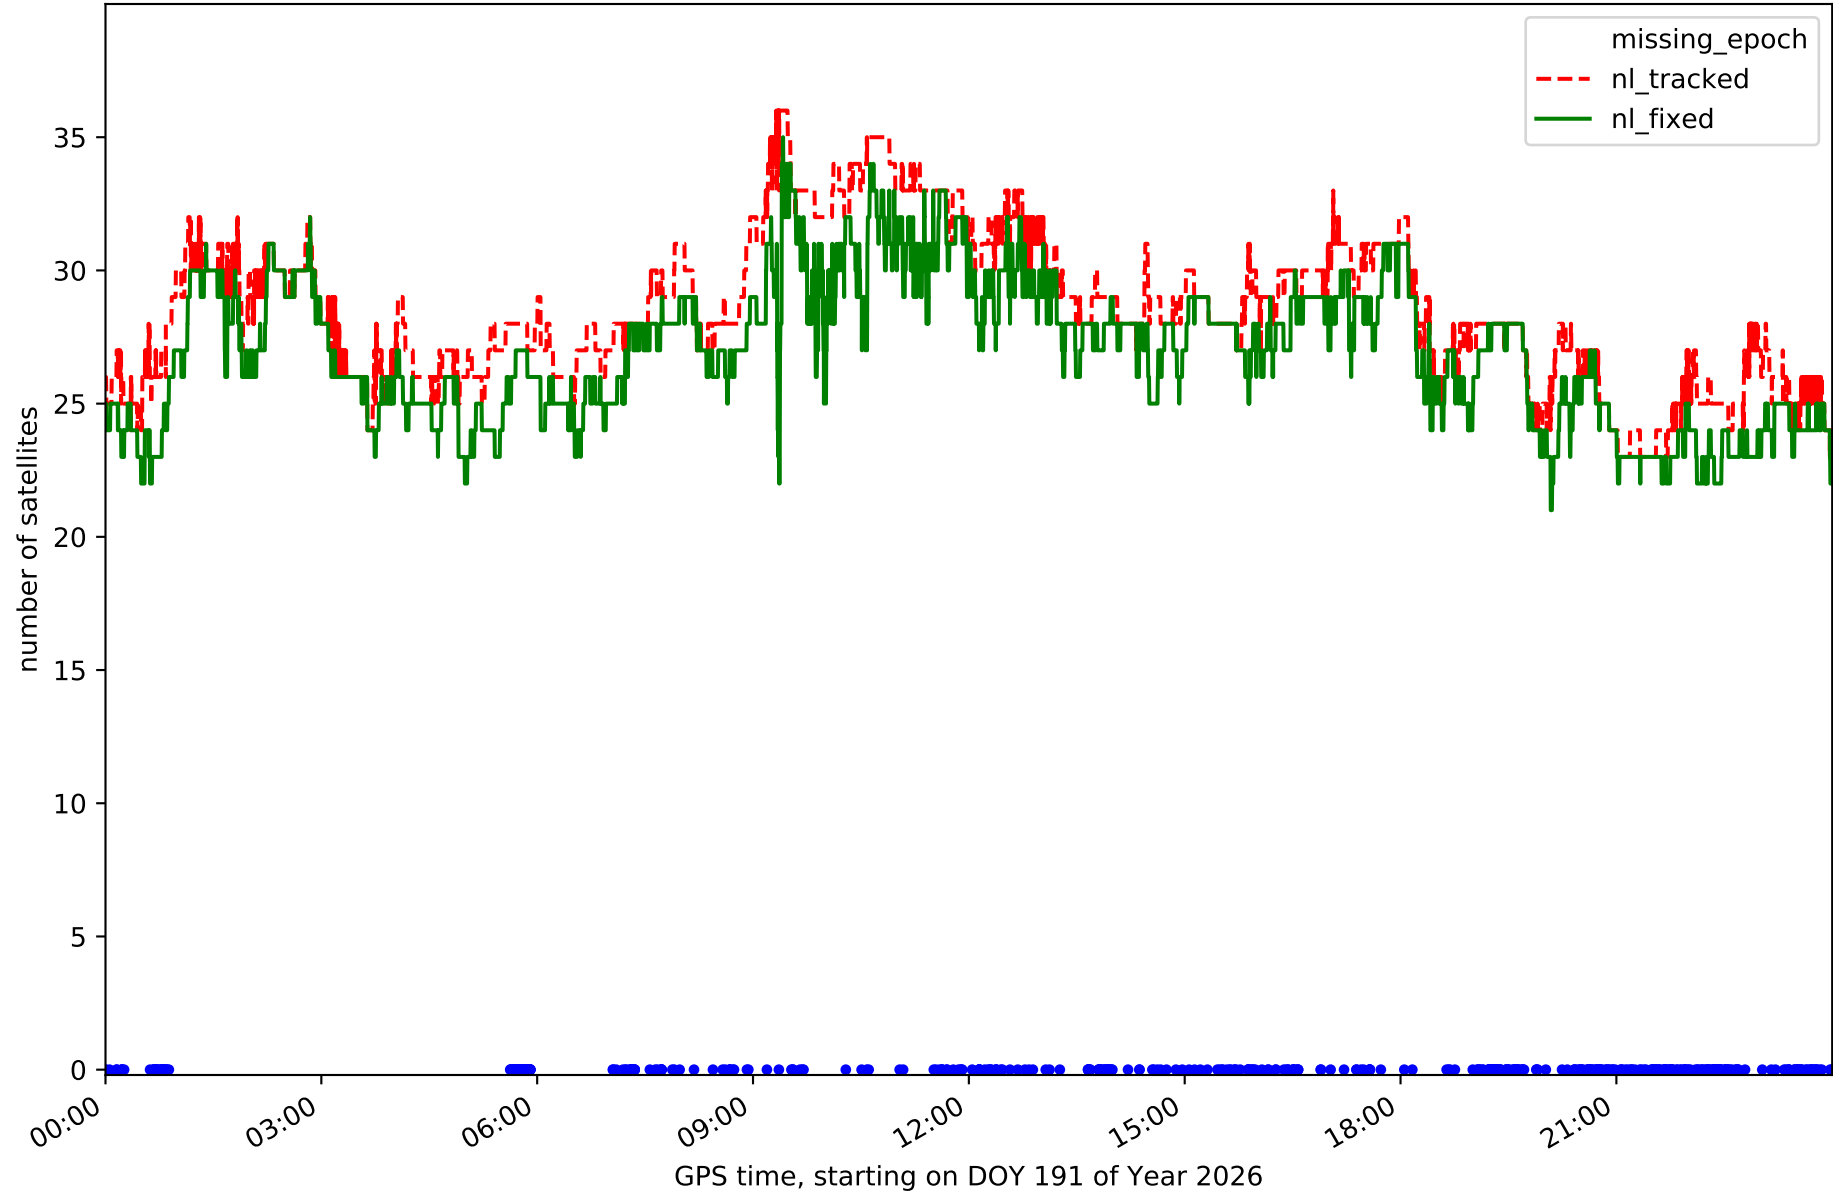


Station TN09 in network N32T

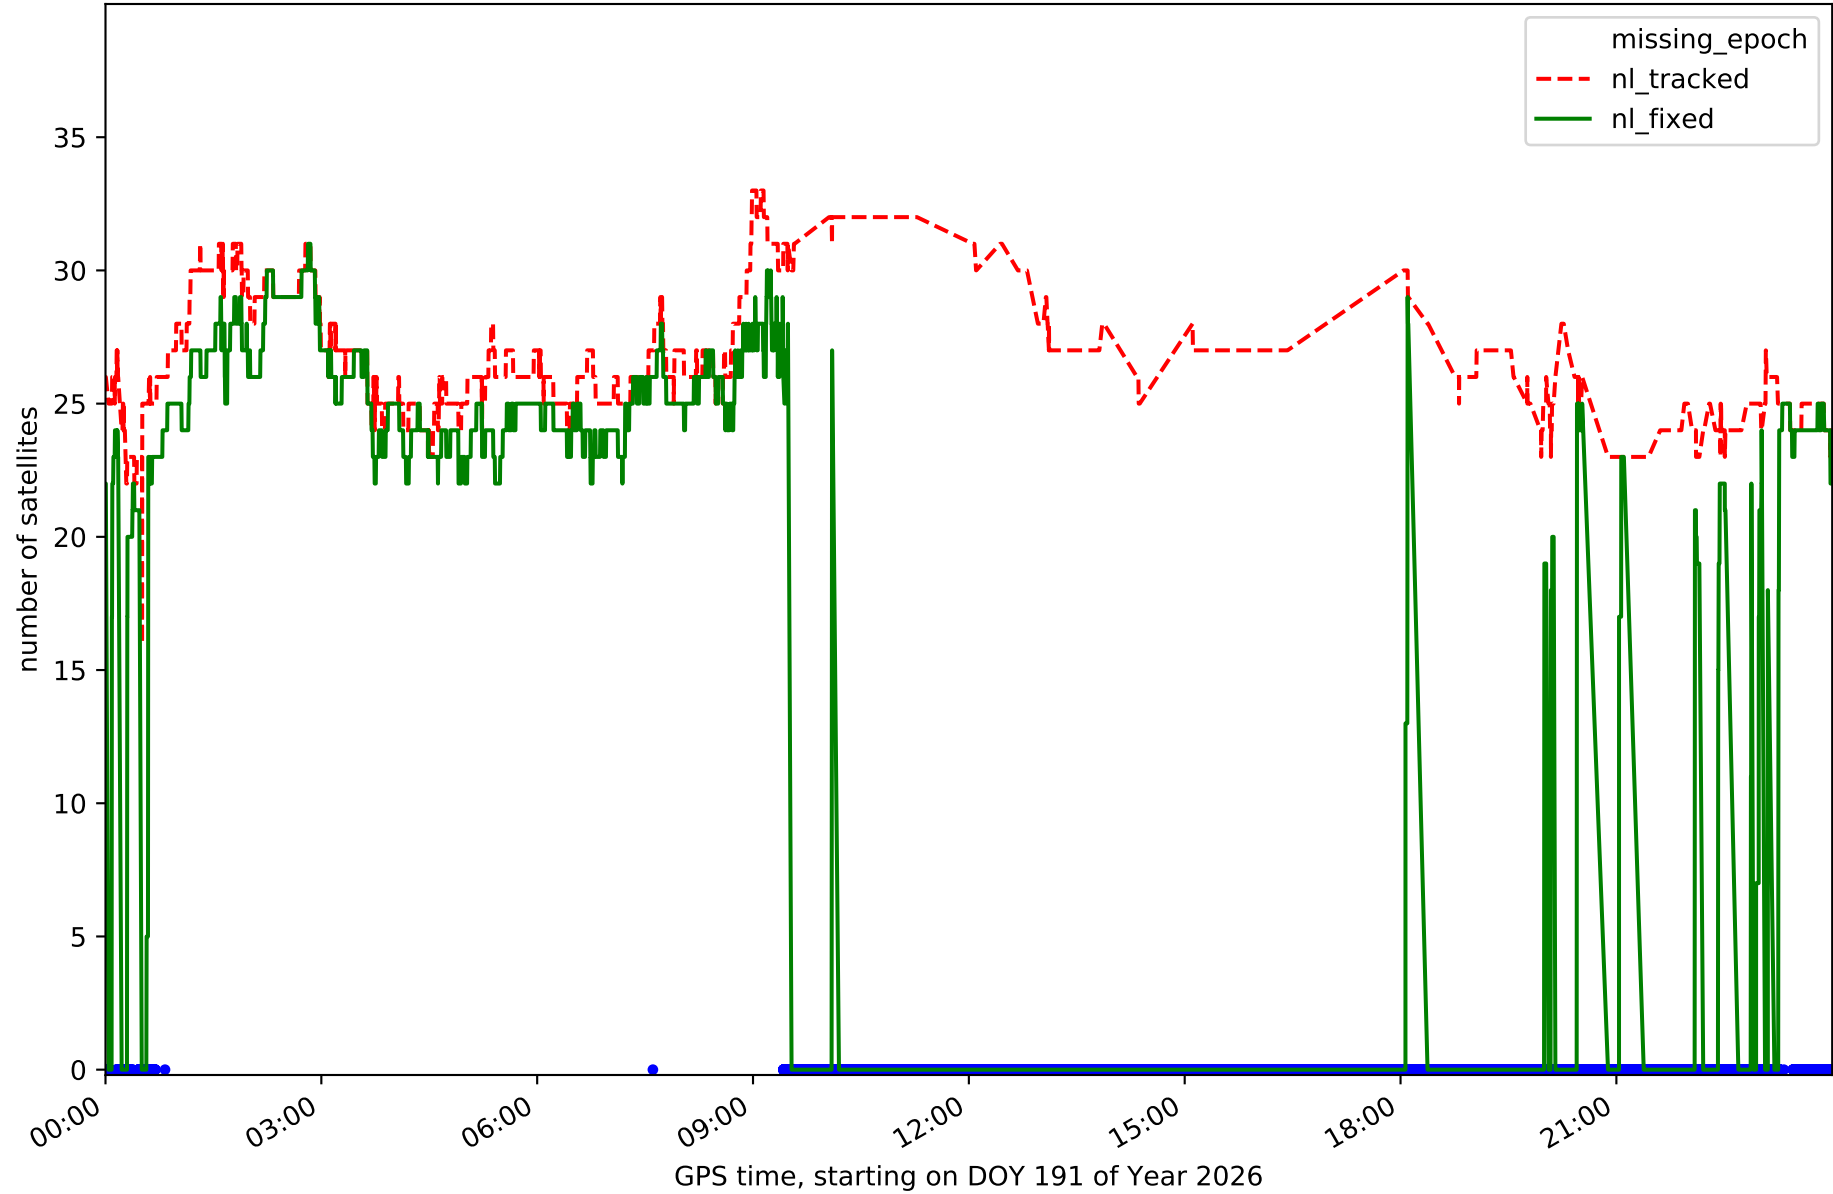


Station TE11 in network N32T

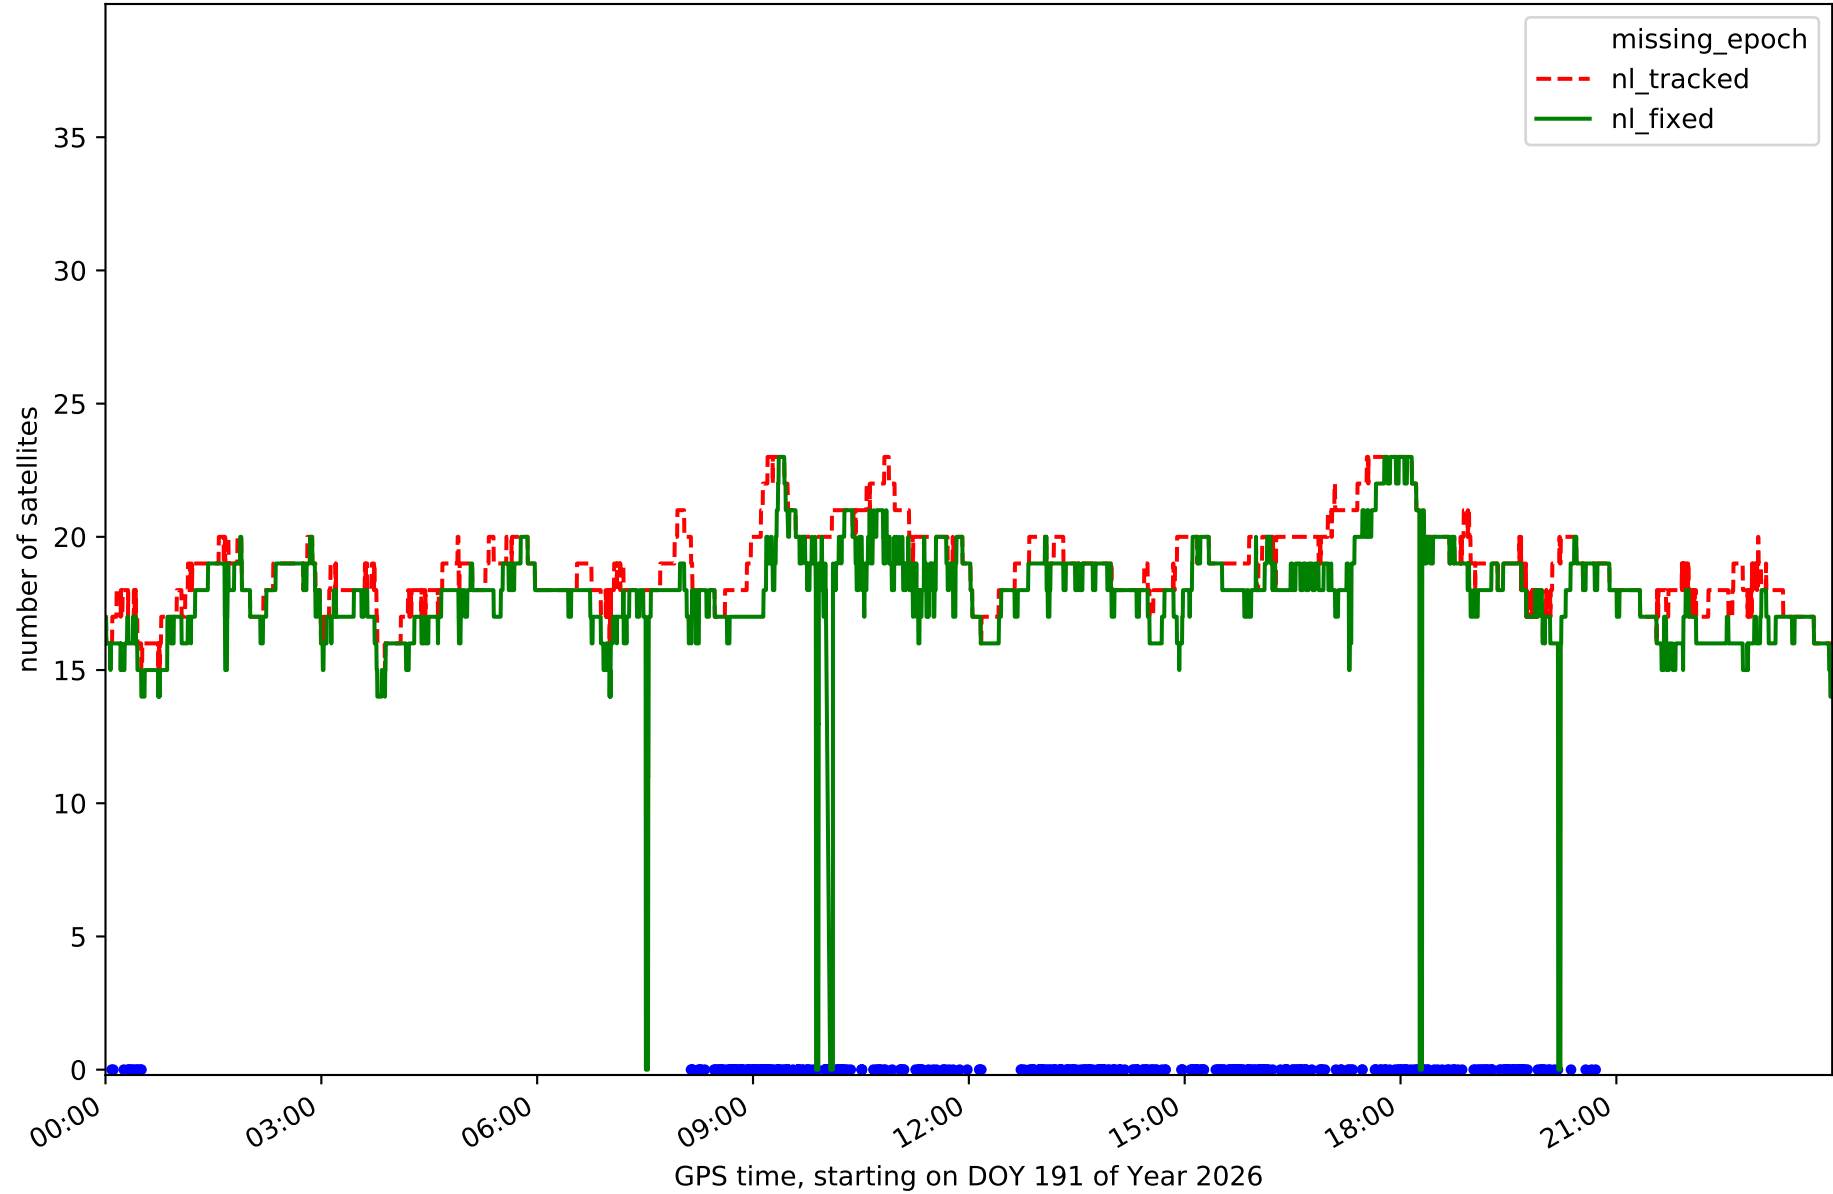


RefCheck for station EH01 in network N32T

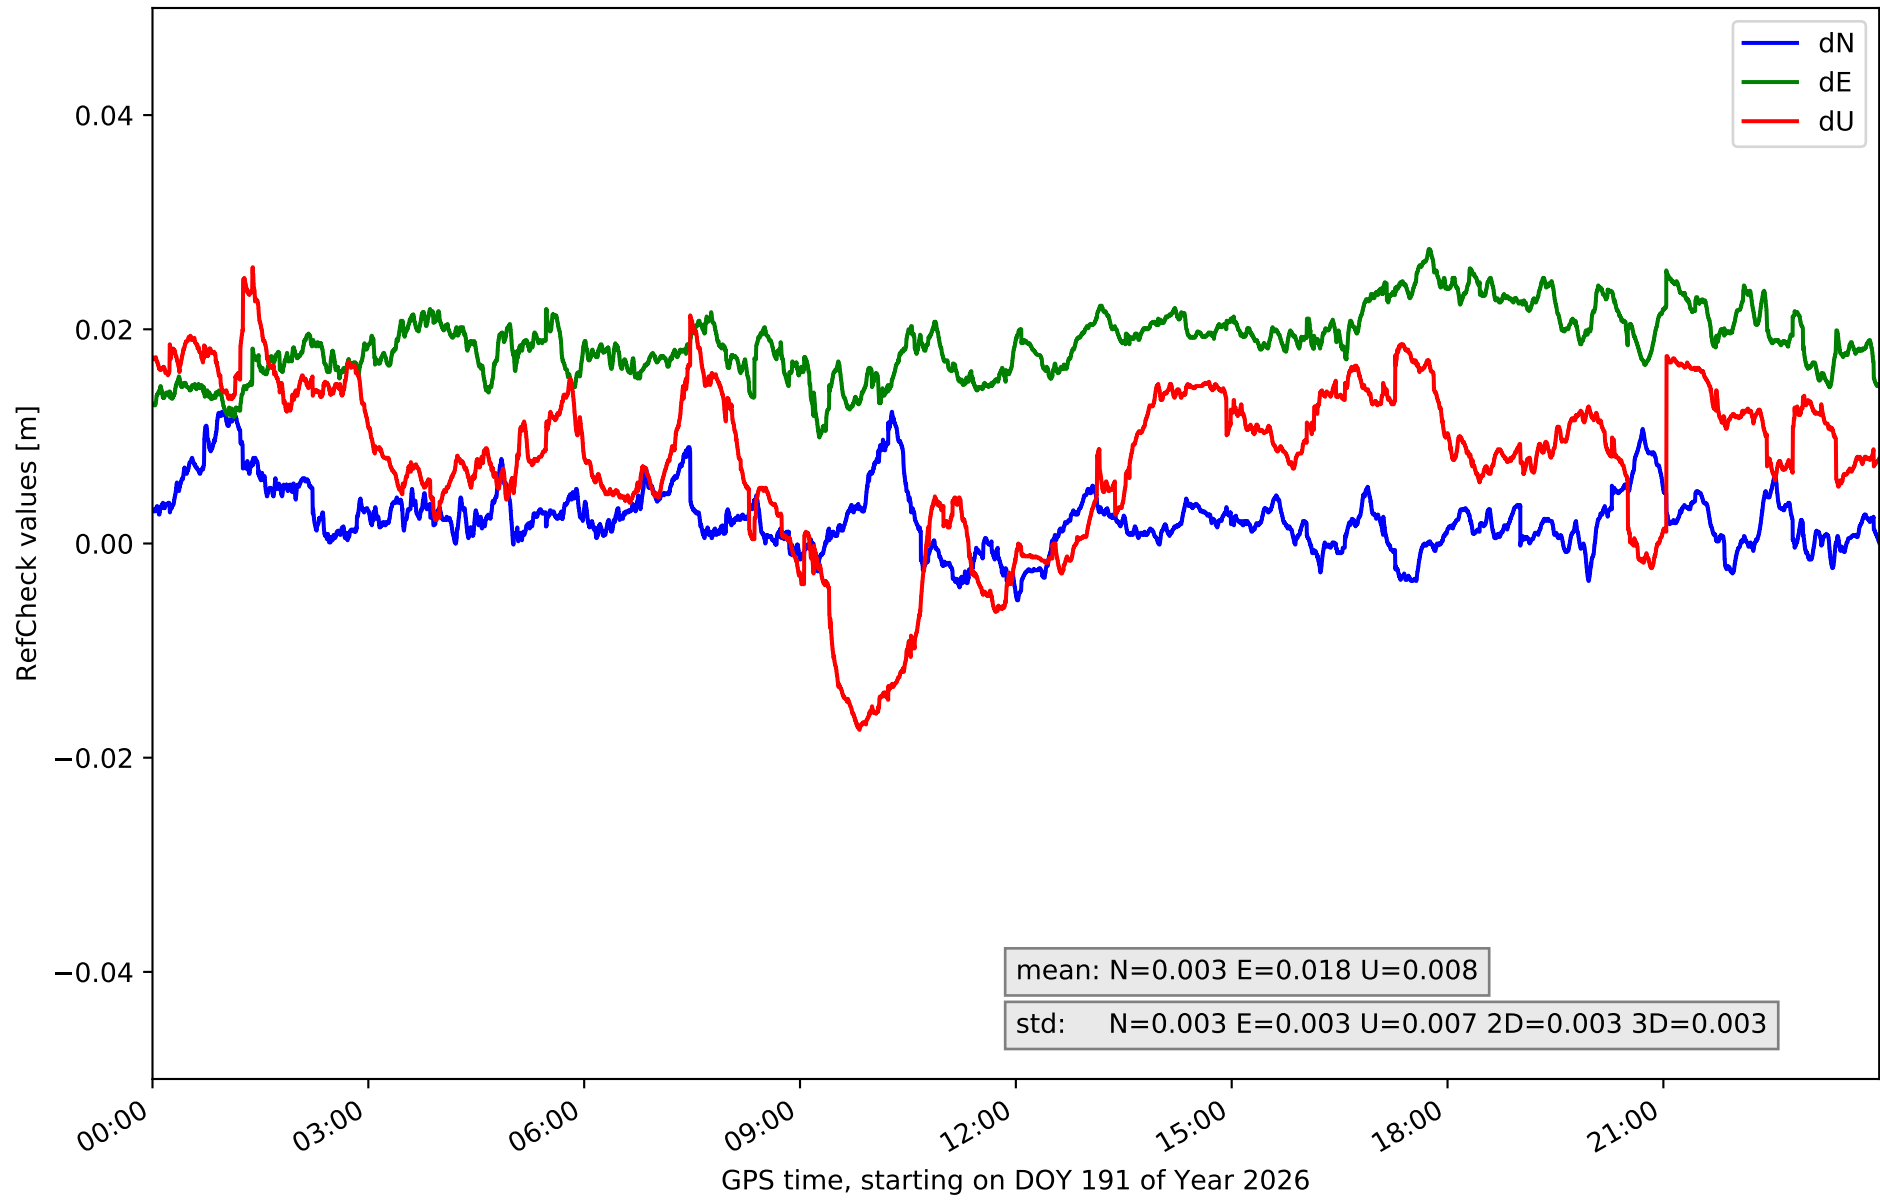


RefCheck for station EH02 in network N32T

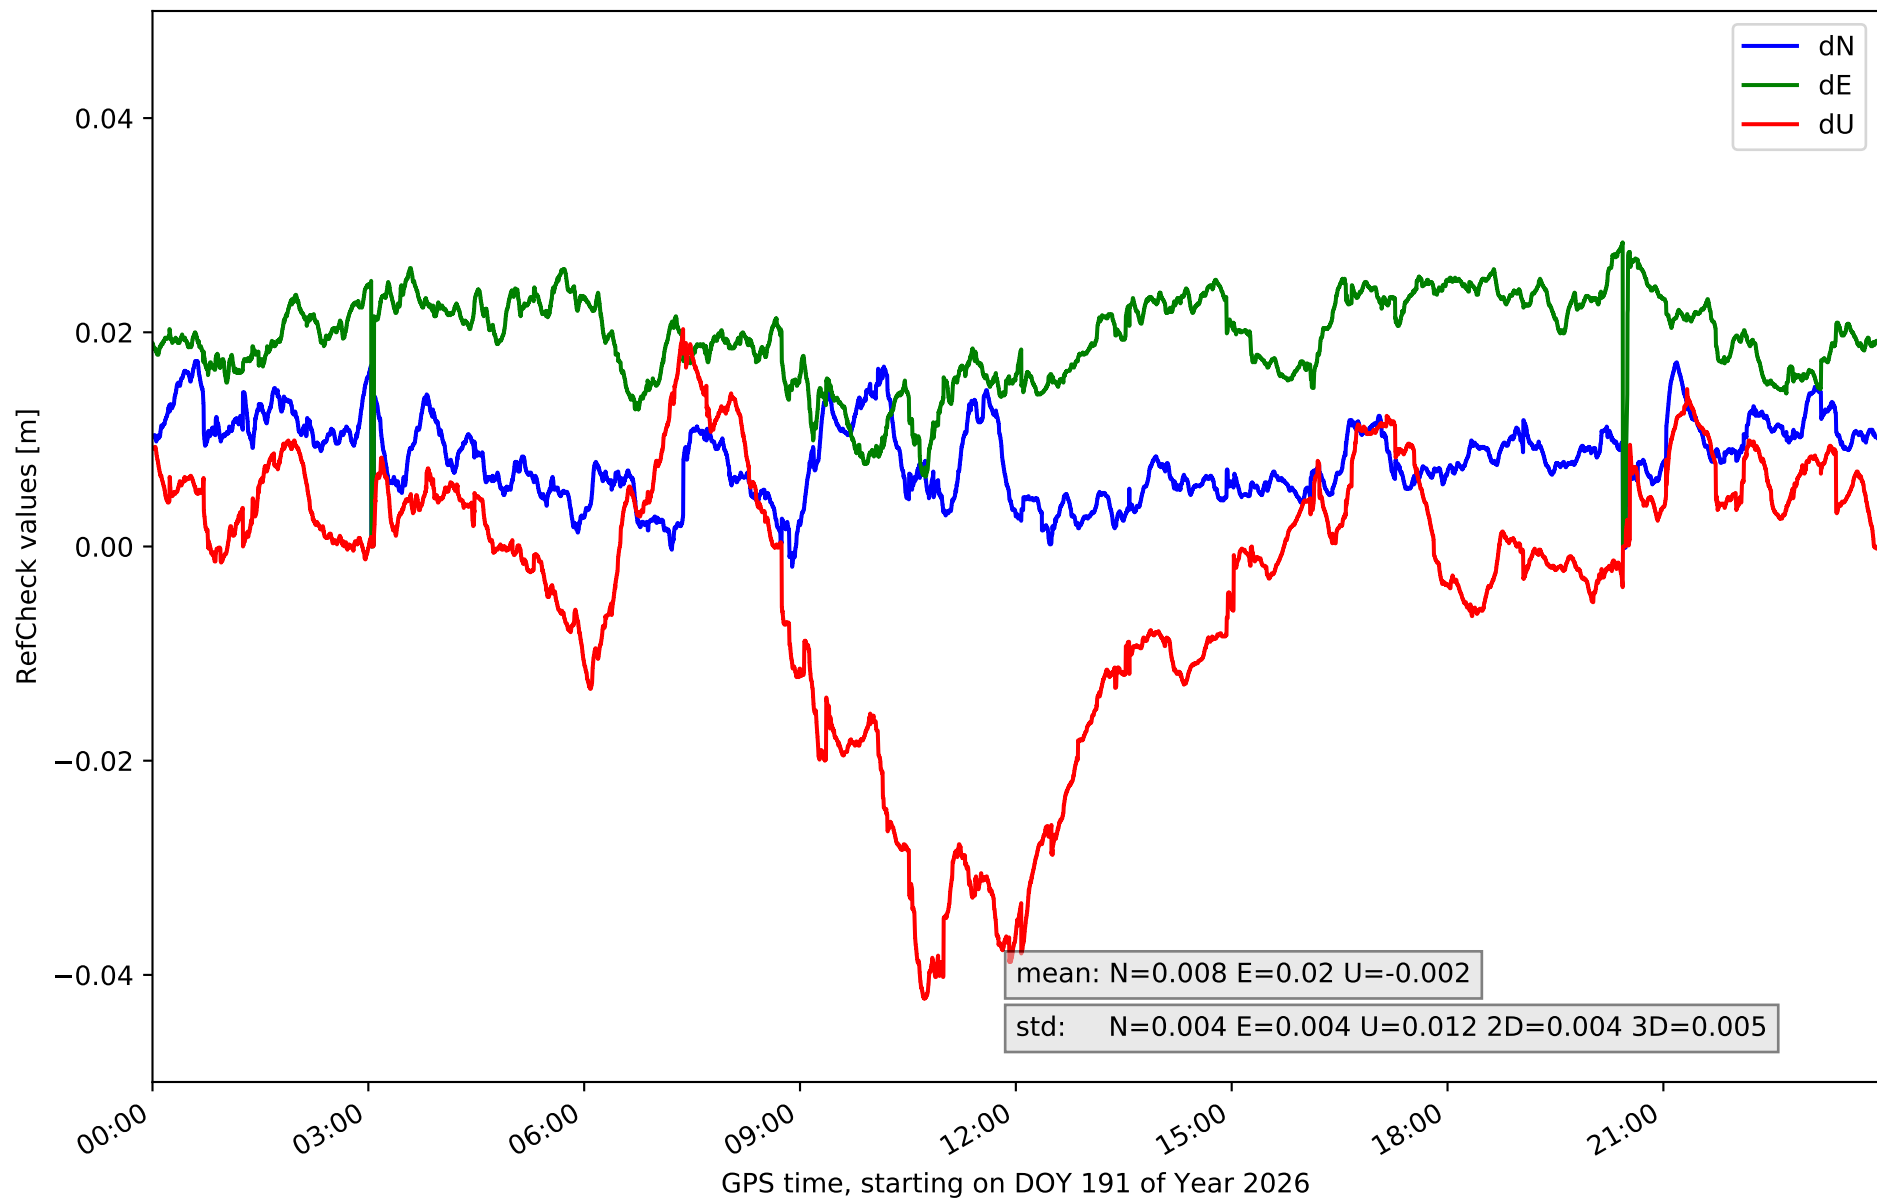


RefCheck for station GOM1 in network N32T

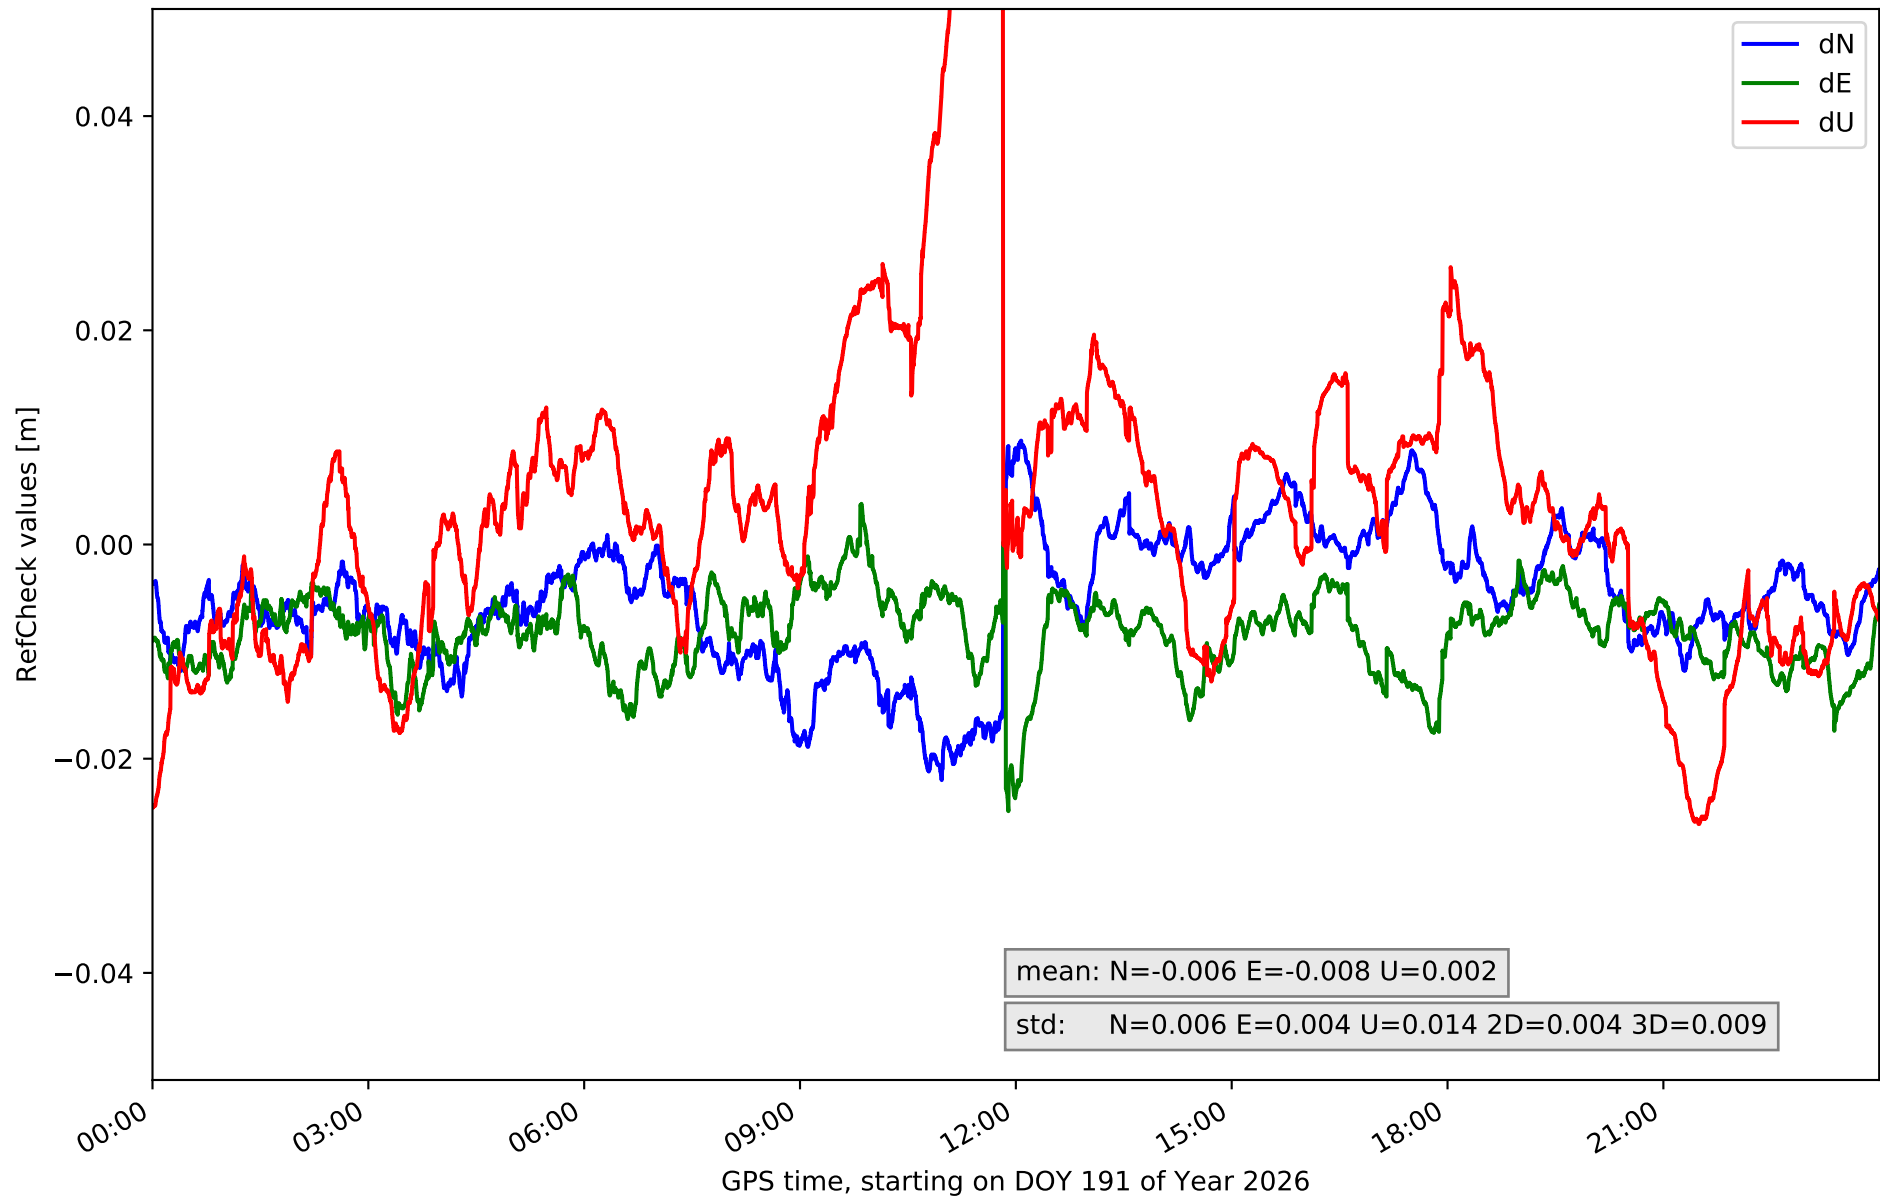


RefCheck for station GOME in network N32T

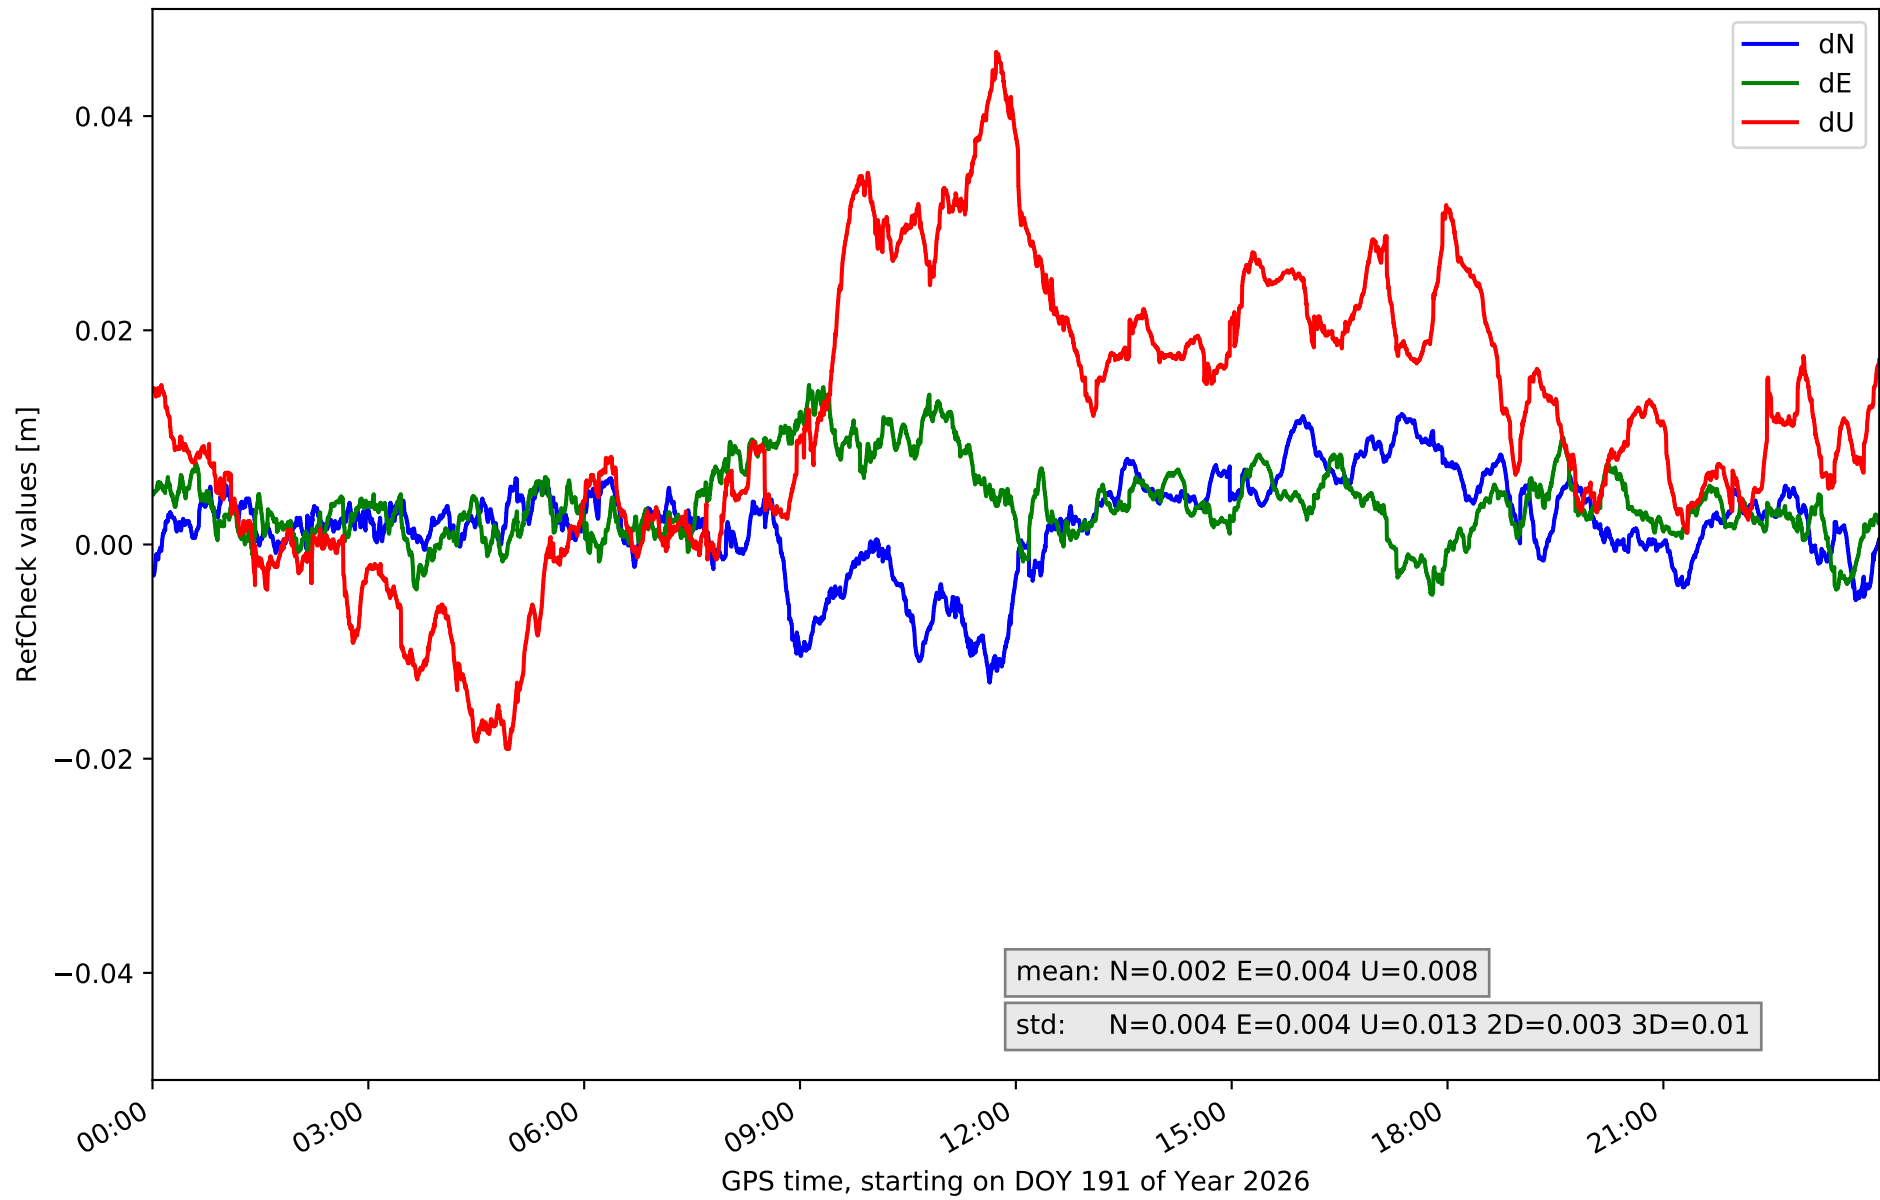


RefCheck for station IZAN in network N32T

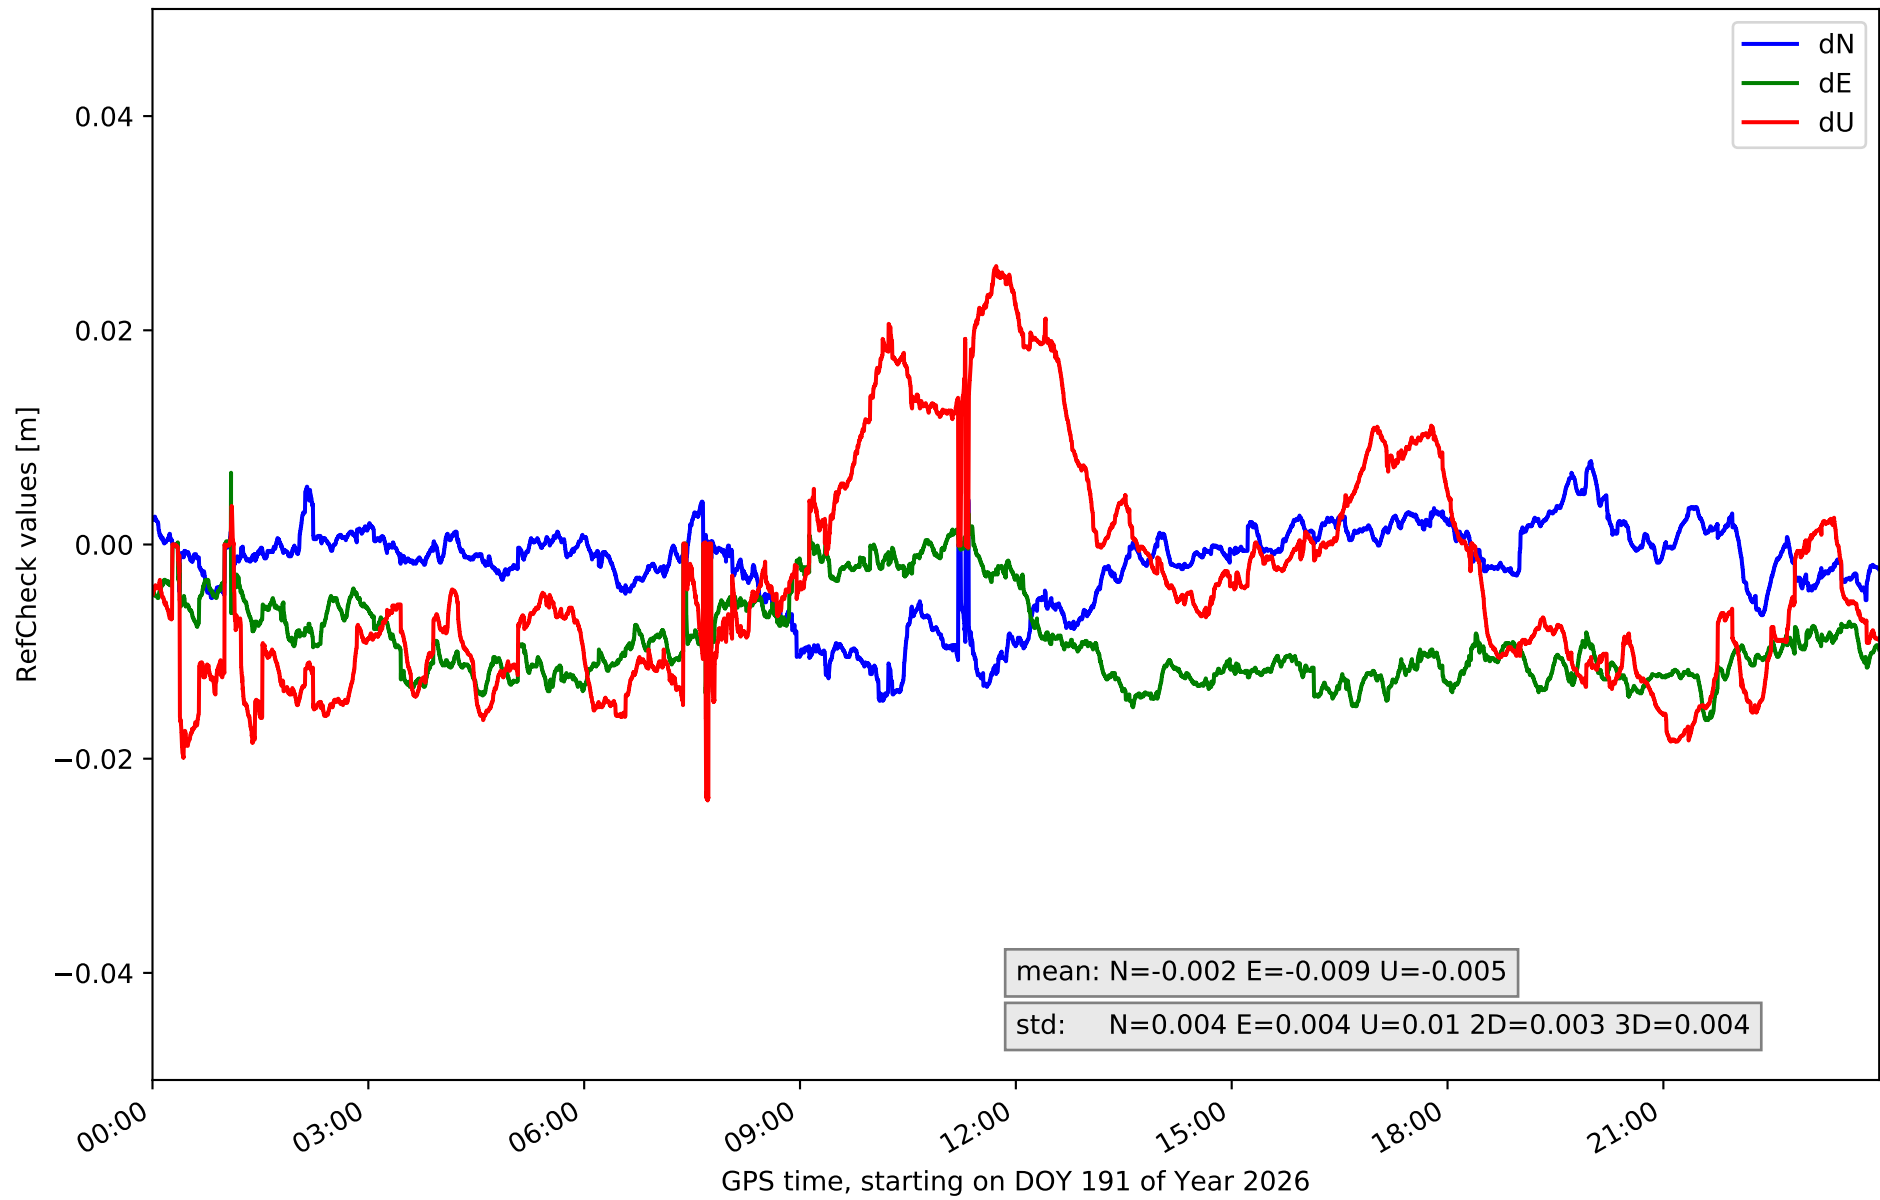


RefCheck for station LP01 in network N32T

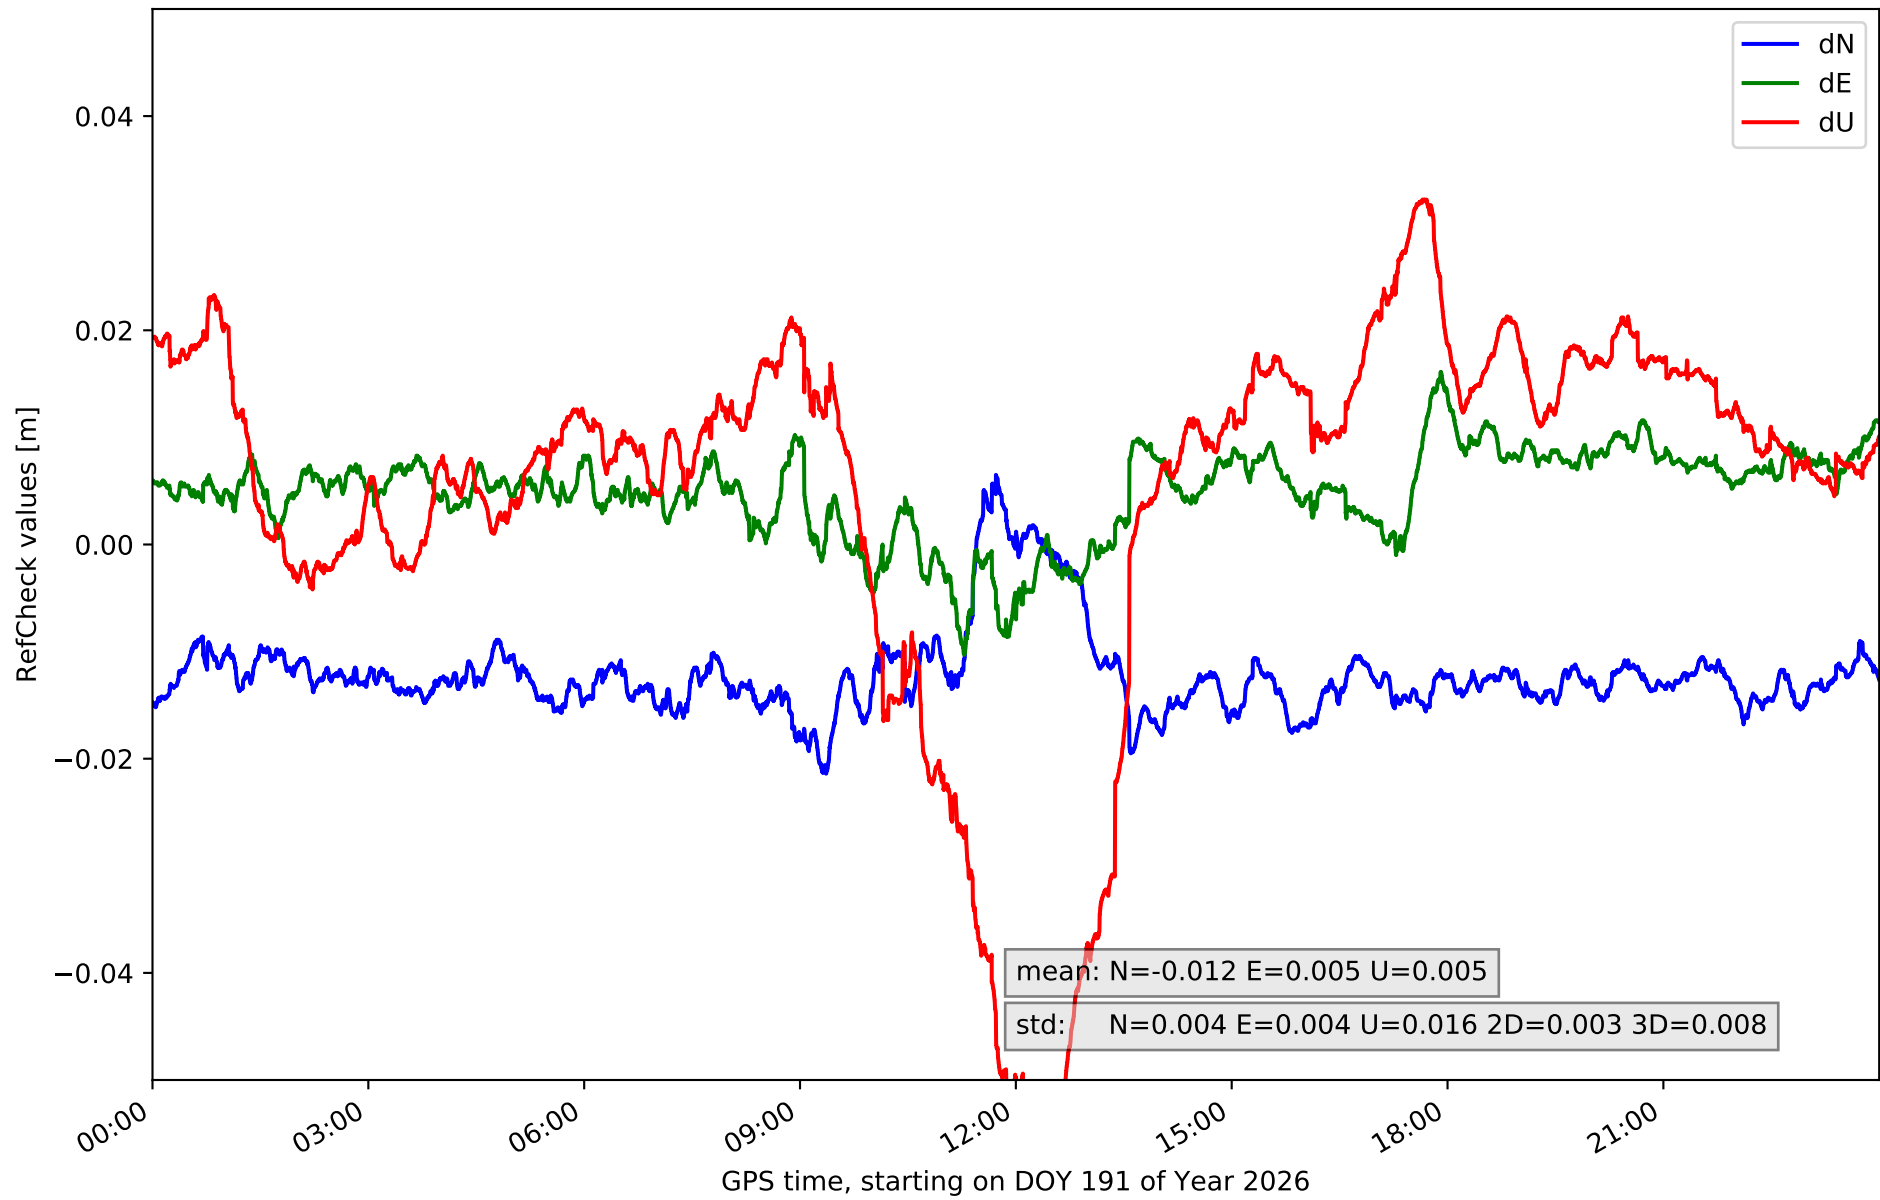


RefCheck for station LP03 in network N32T

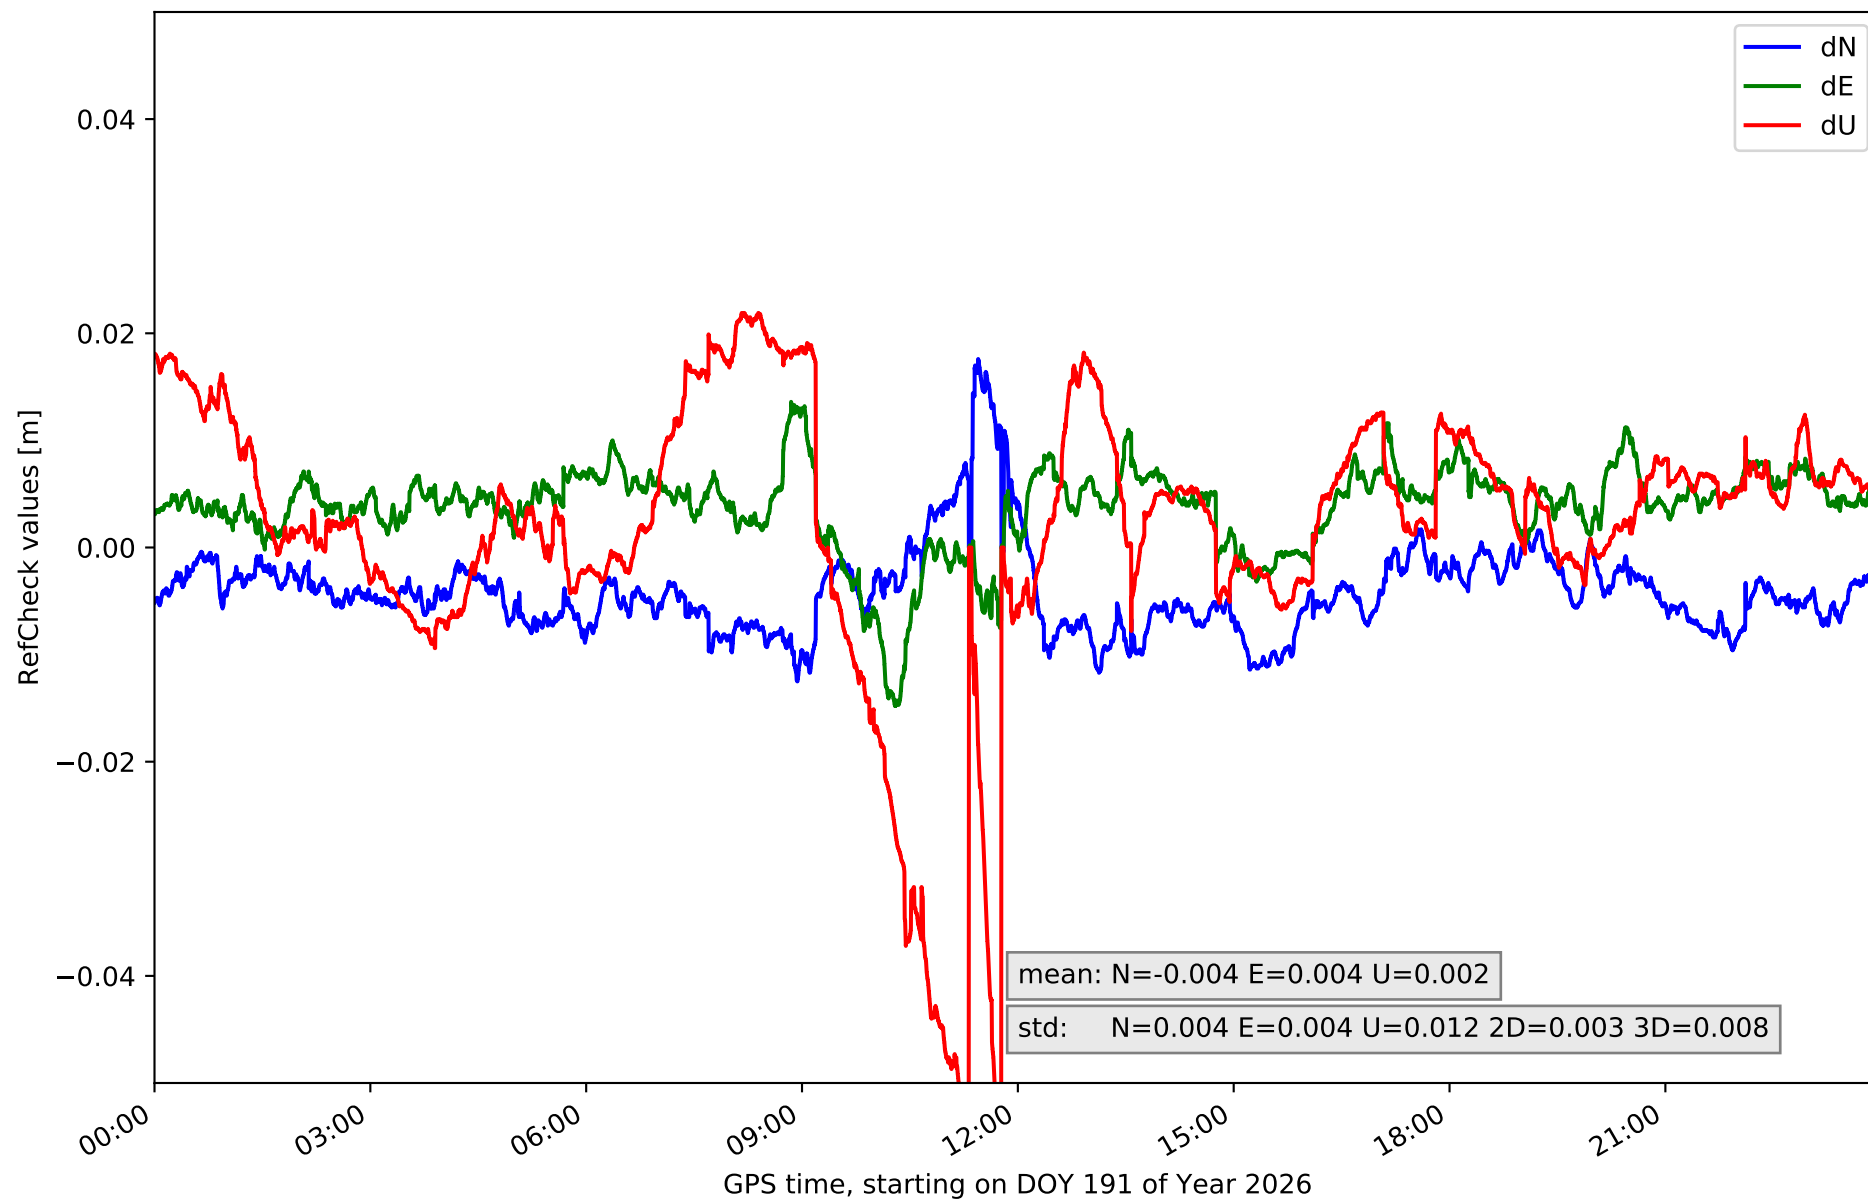


RefCheck for station LPAL in network N32T

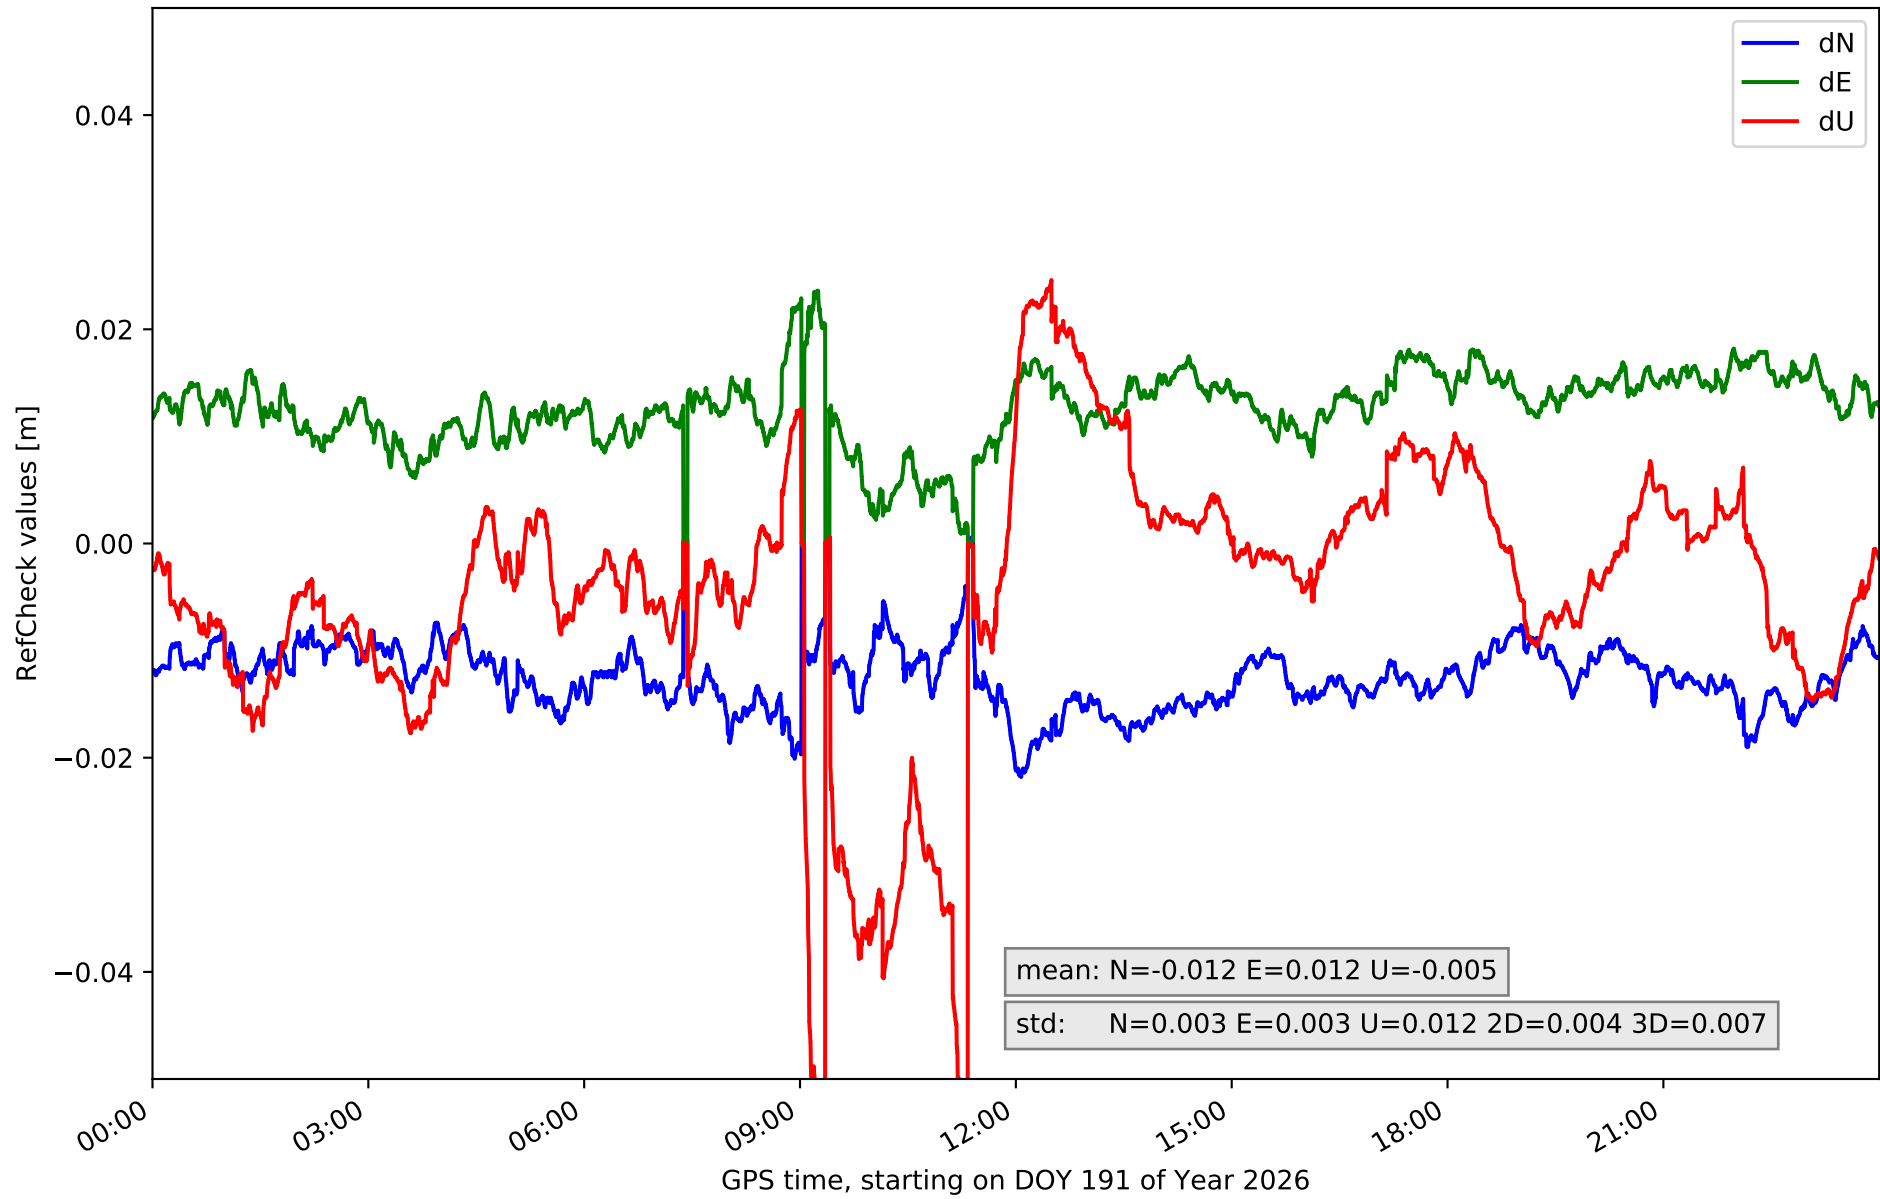


RefCheck for station LRES in network N32T

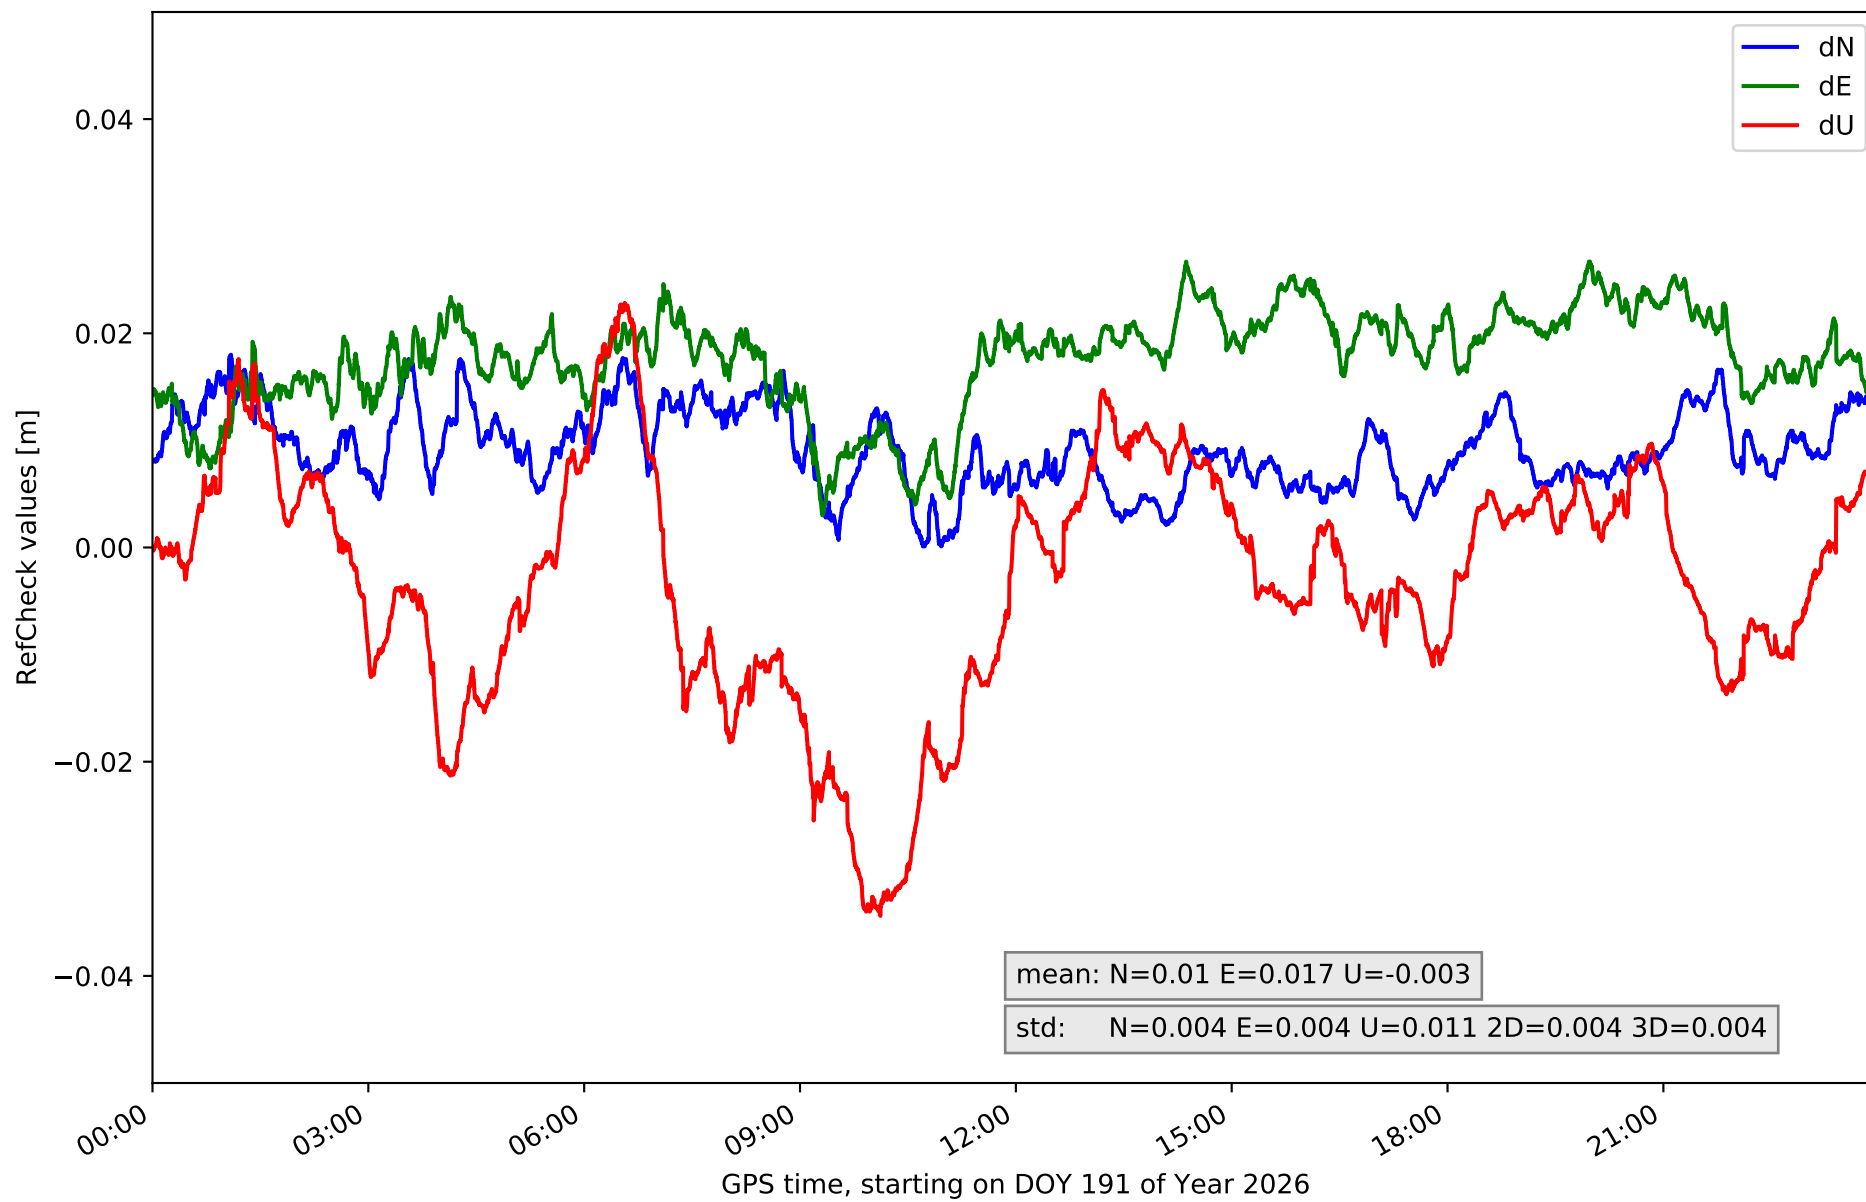


RefCheck for station TN01 in network N32T

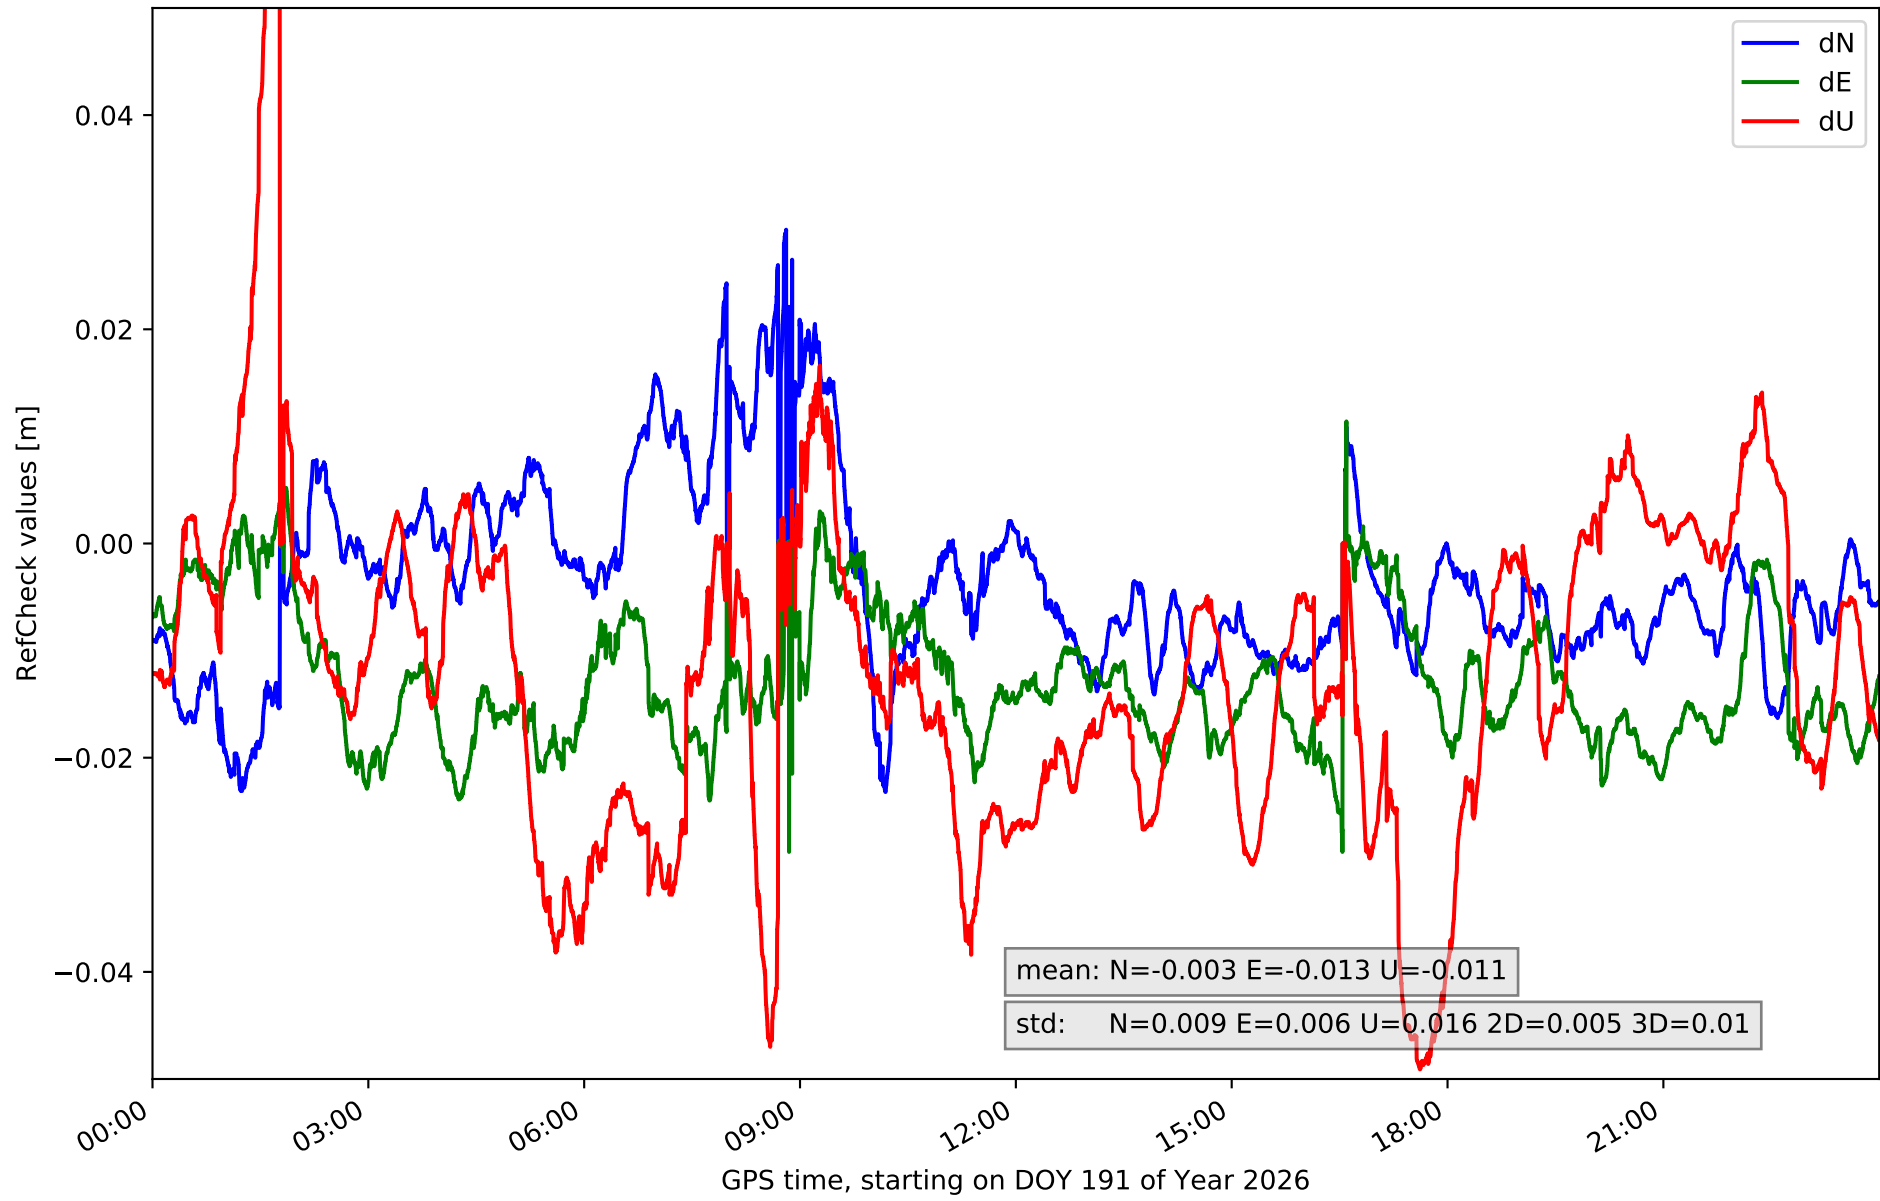


RefCheck for station TN02 in network N32T

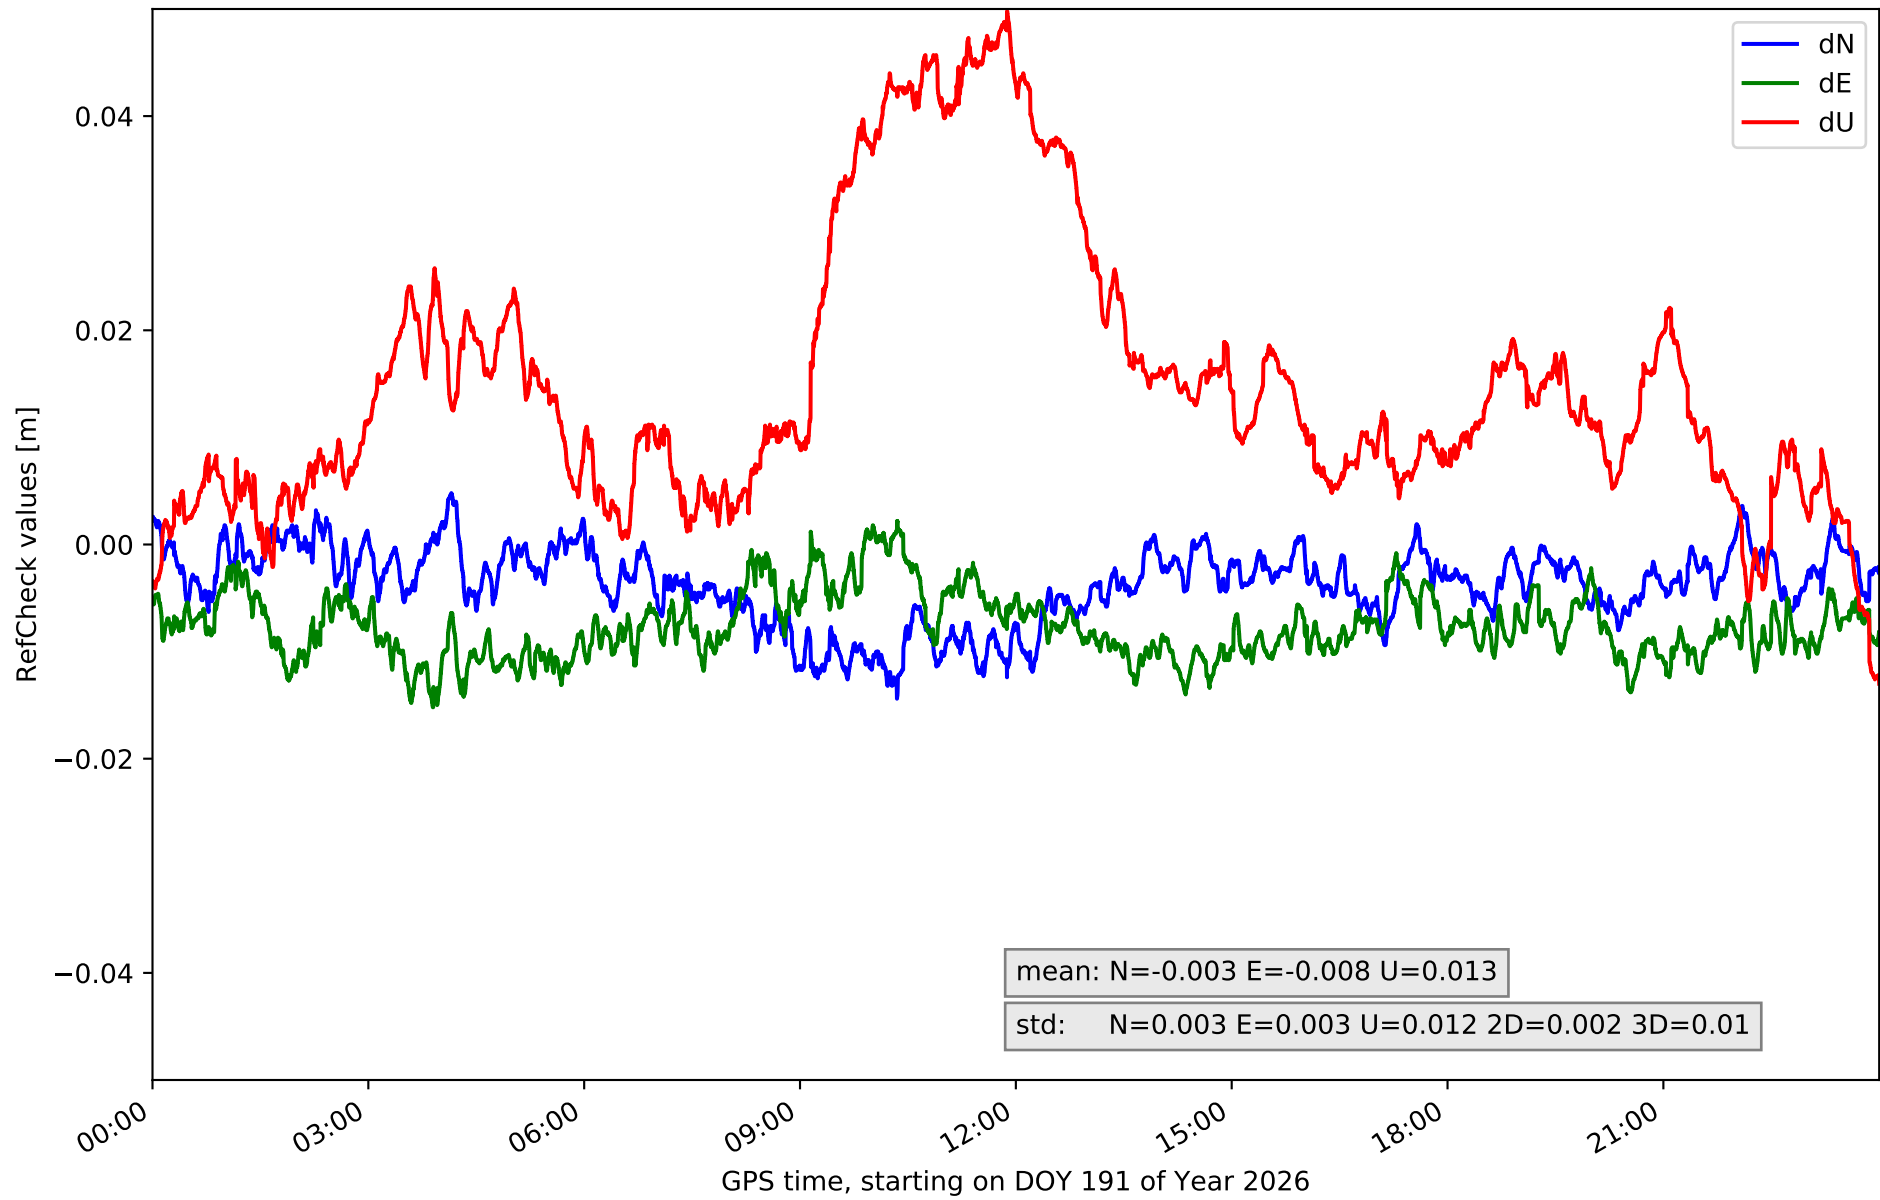


RefCheck for station TN03 in network N32T

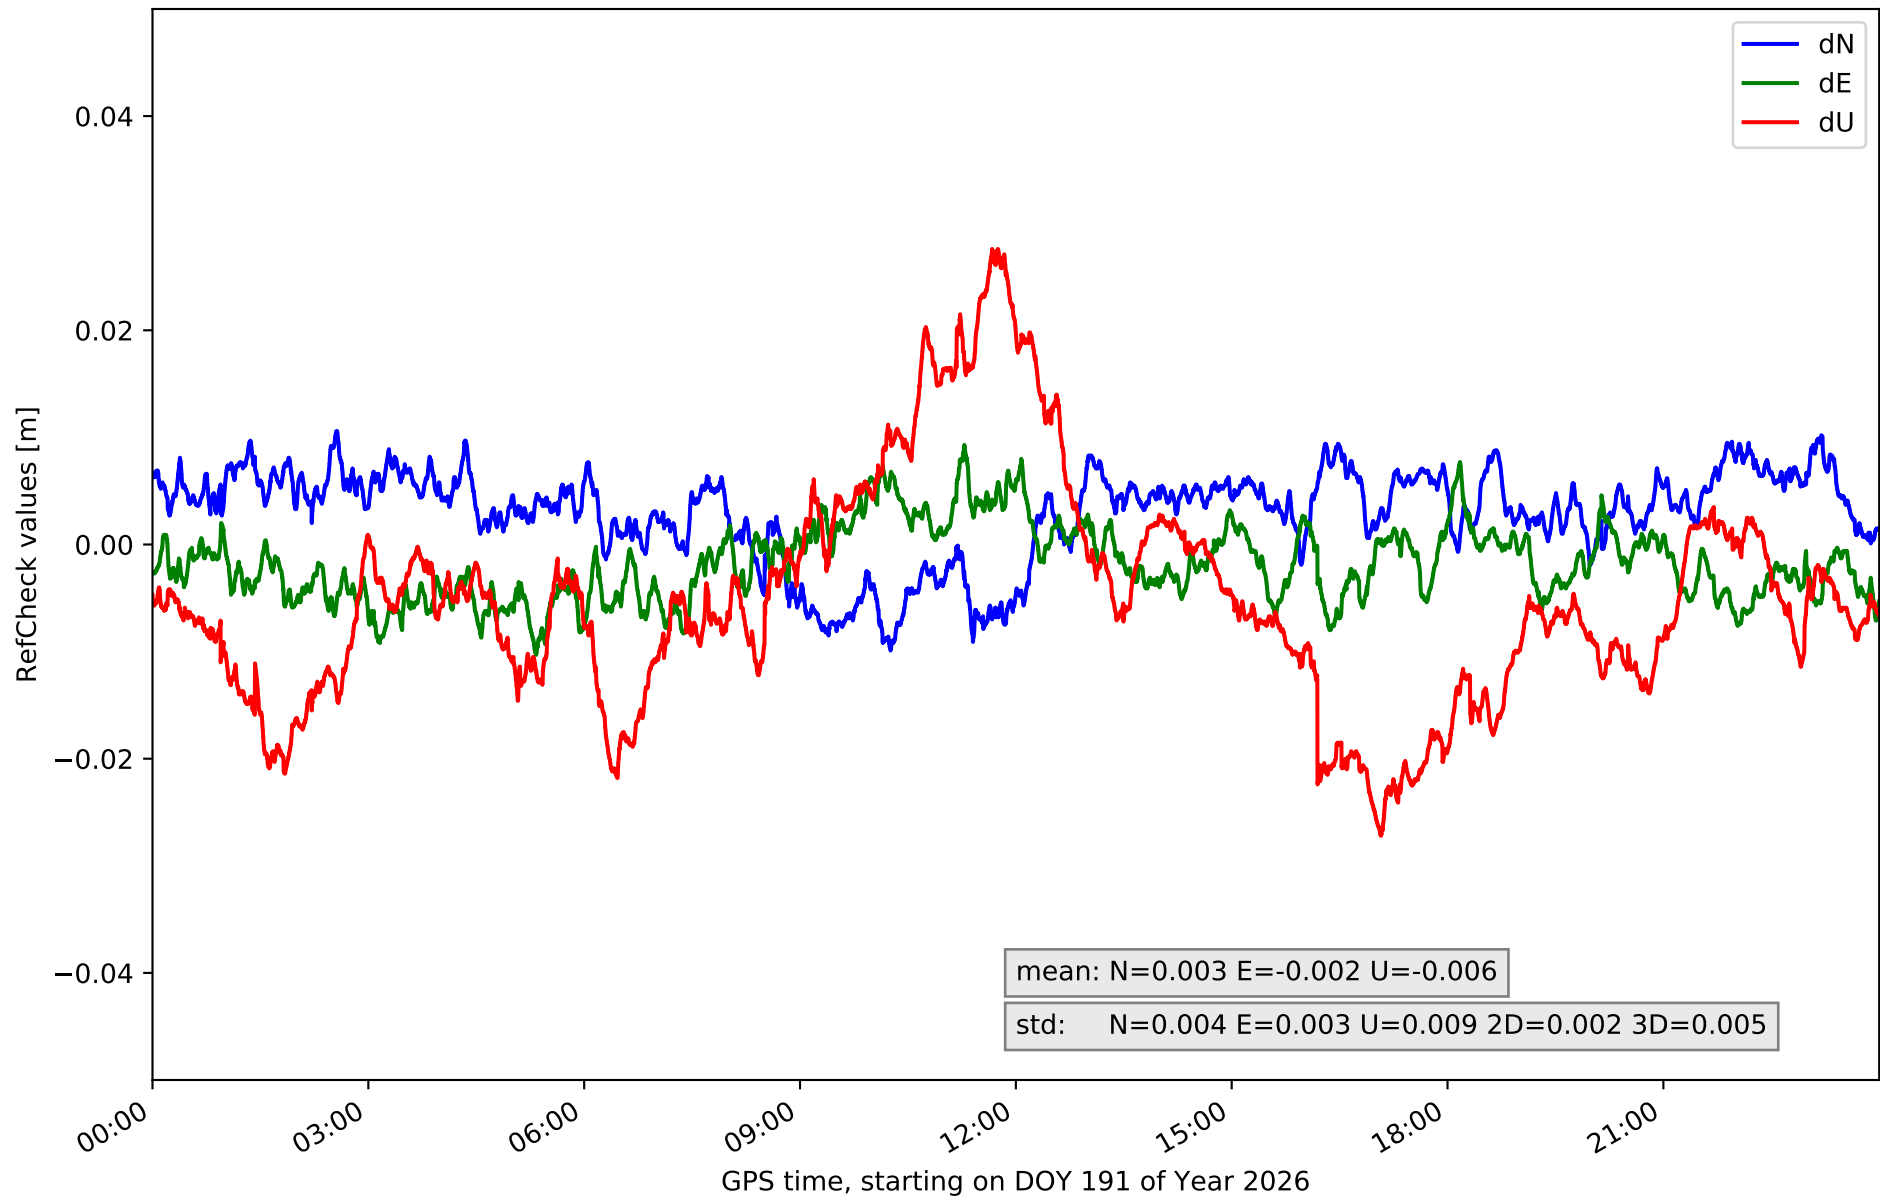


RefCheck for station TN06 in network N32T

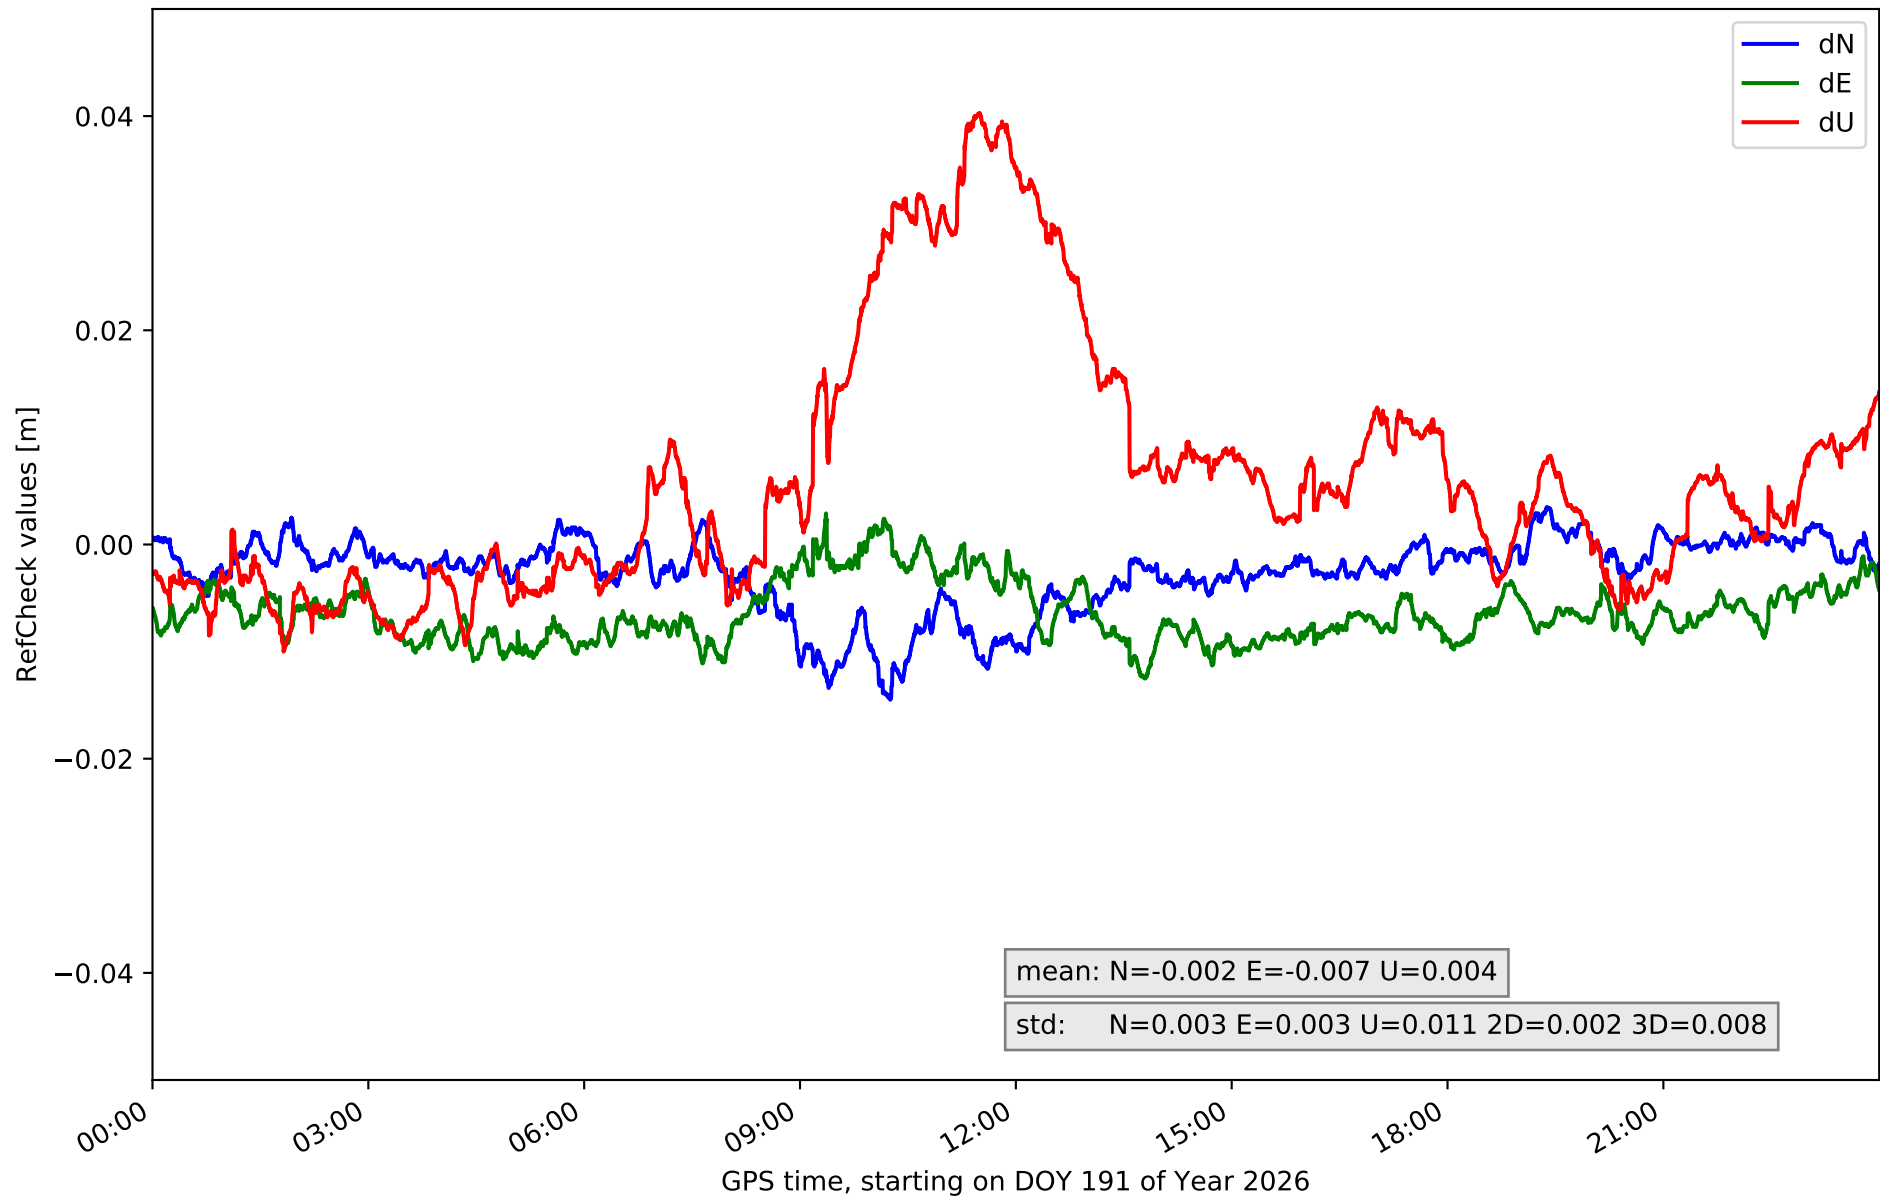

RefCheck for station TN09 in network N32T

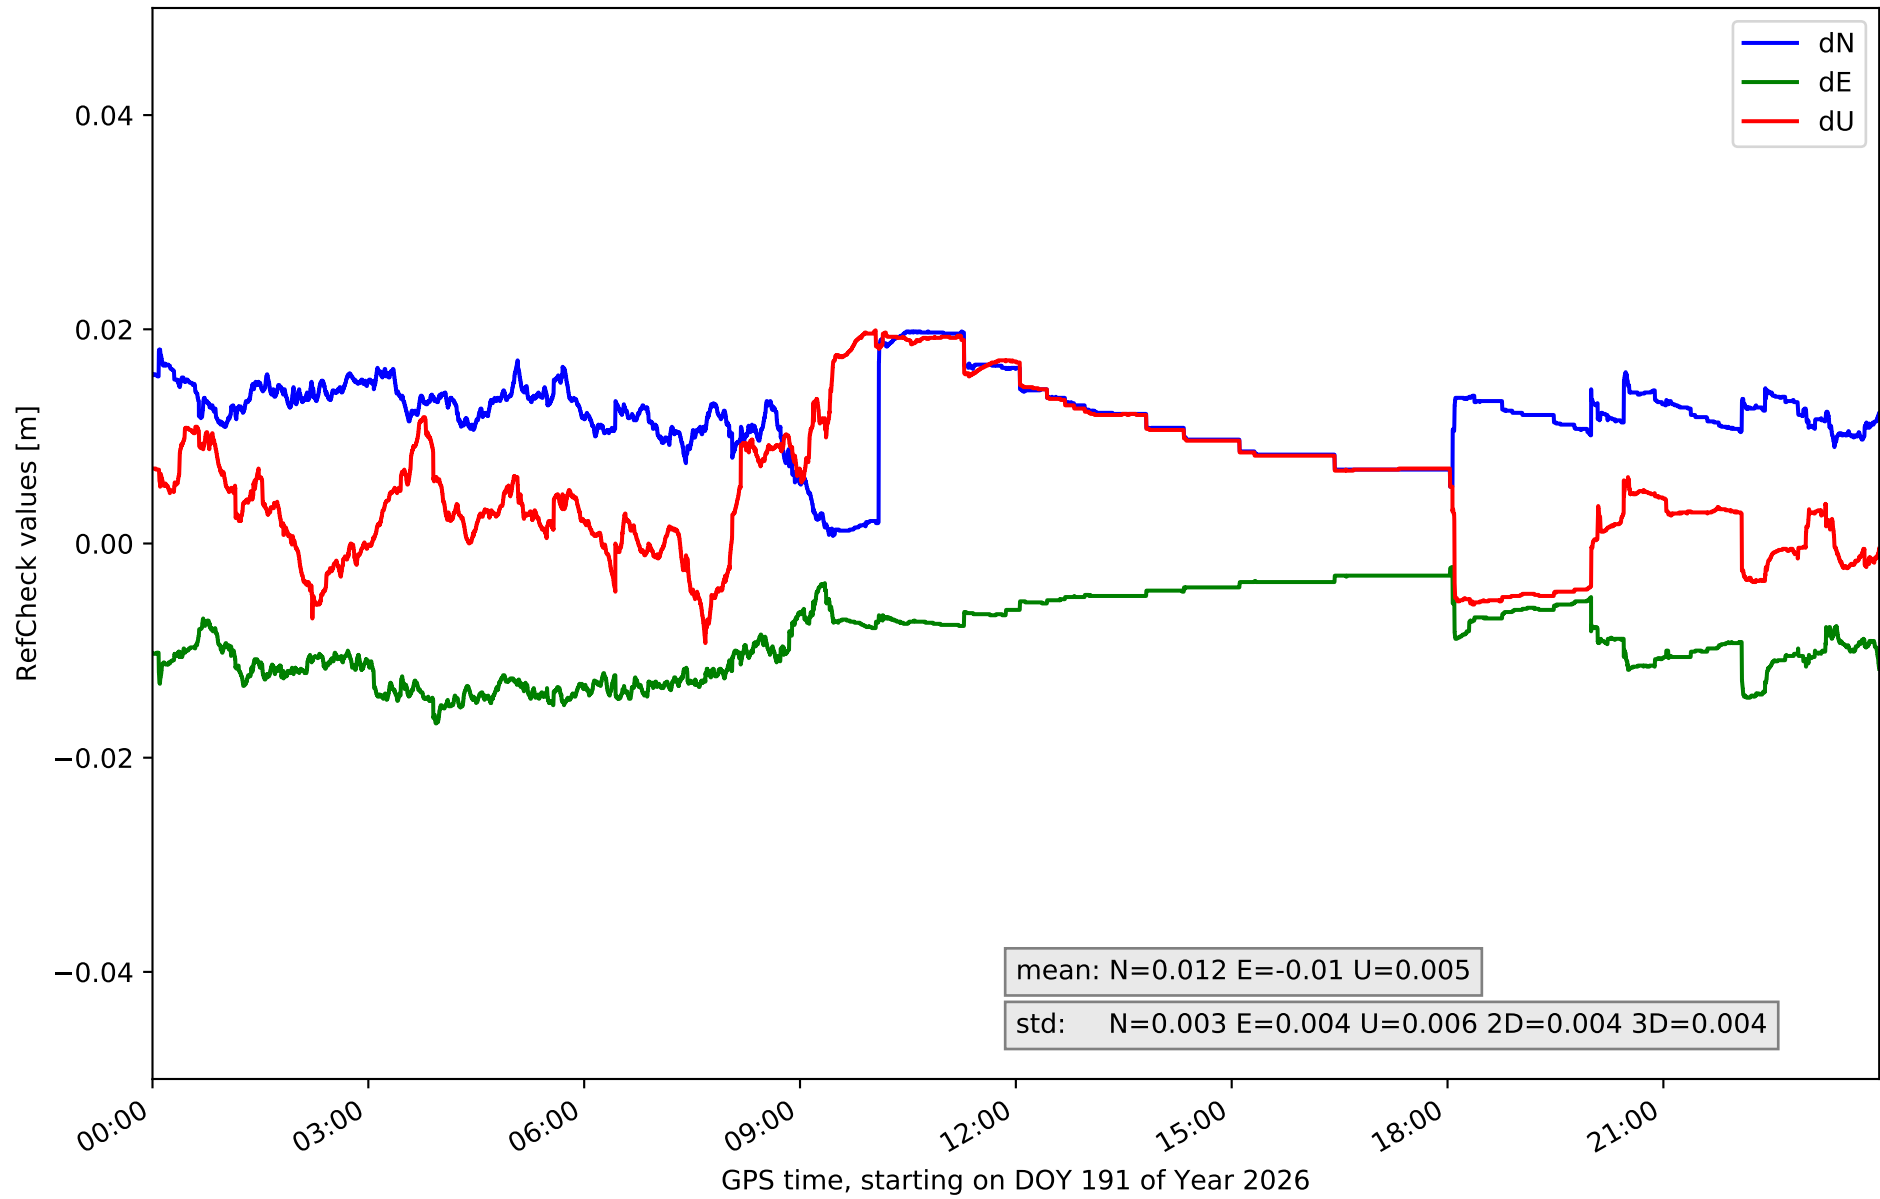

RefCheck for station TE11 in network N32T

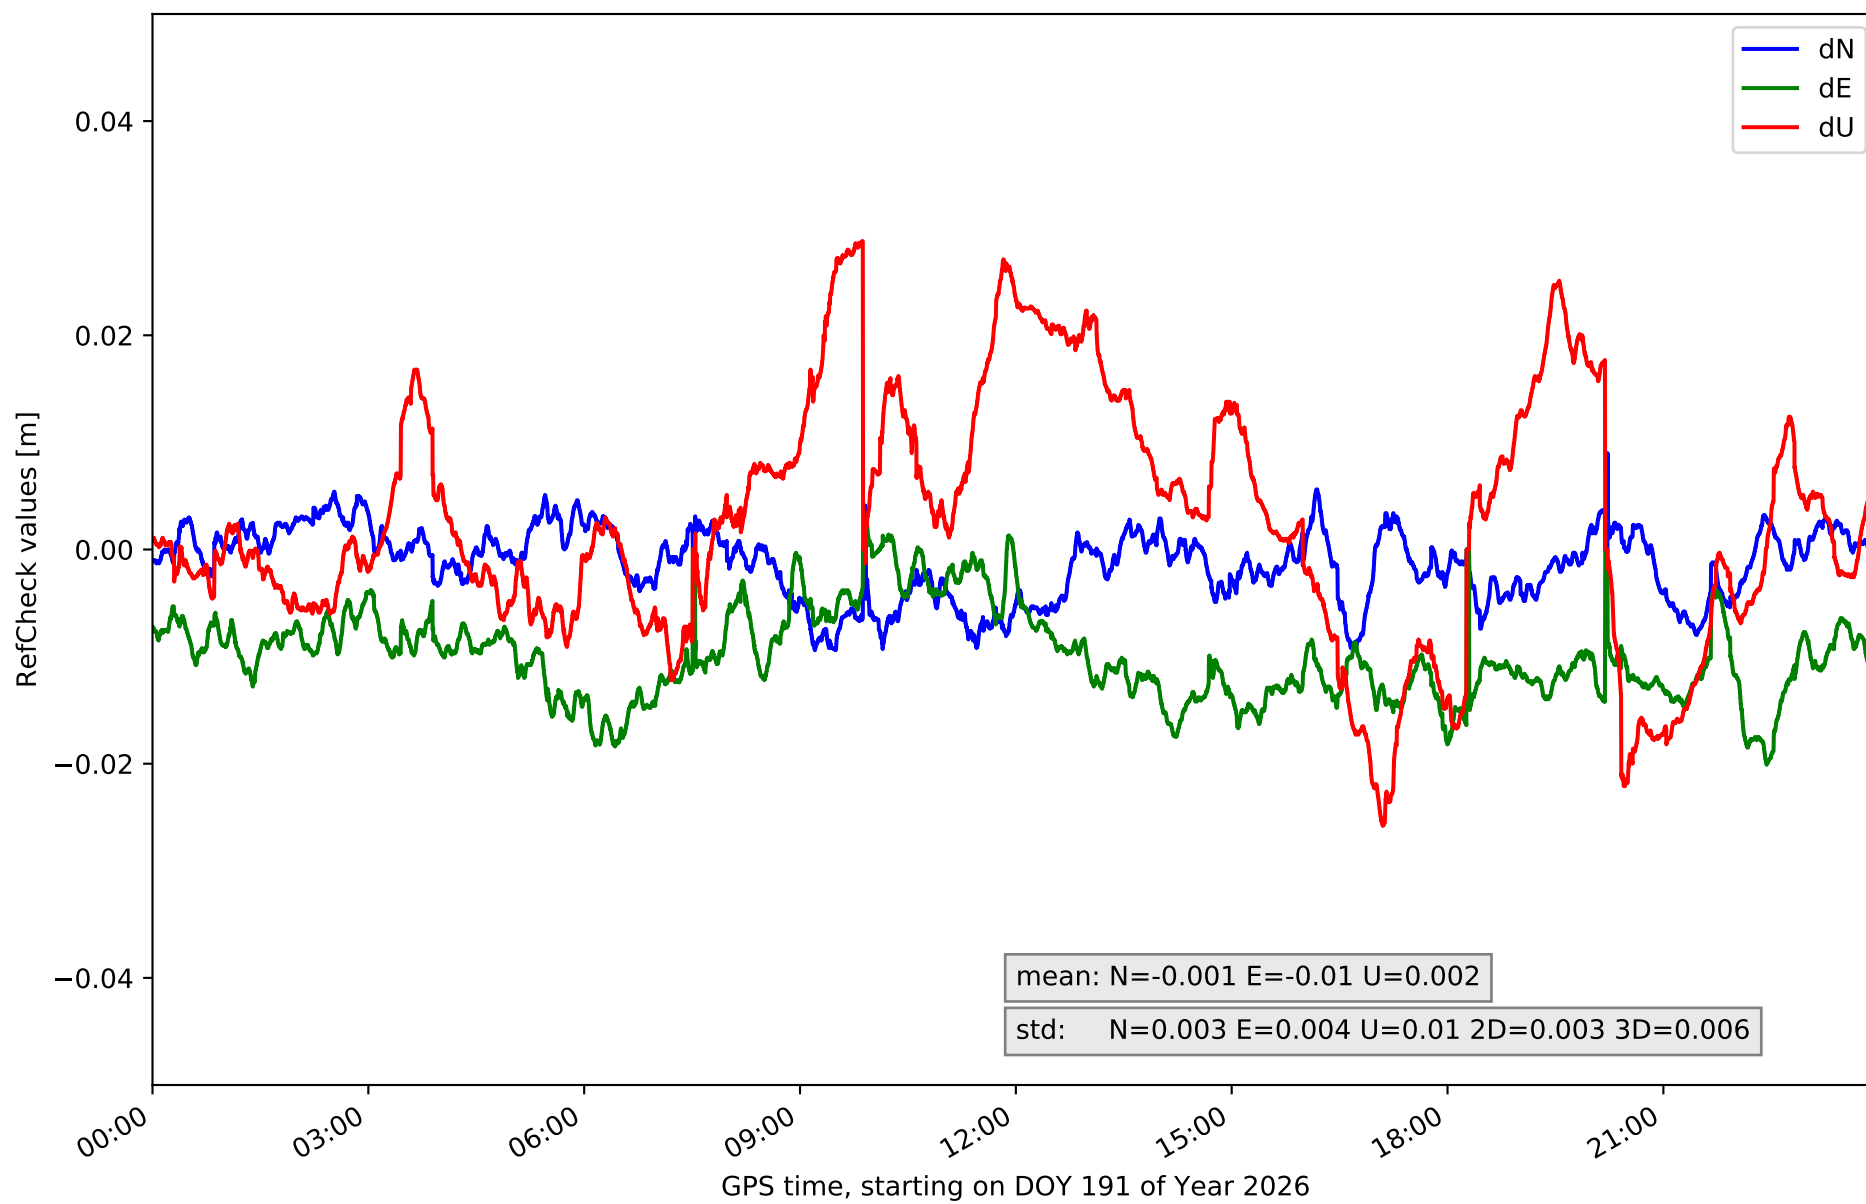

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.005	0.012	0.003	0.01	0.028	0.003	-0.017	0.026	0.007	0.003	0.003	60346	100.0	42508	70.4
EH02	-0.002	0.017	0.004	0.0	0.028	0.004	-0.042	0.02	0.012	0.004	0.005	59989	99.4	52215	86.5
GOM1	-0.022	0.01	0.006	-0.025	0.004	0.004	-0.026	0.06	0.014	0.004	0.009	36543	60.5	8985	14.9
GOME	-0.013	0.012	0.004	-0.005	0.015	0.004	-0.019	0.046	0.013	0.003	0.01	8703	14.4	14131	23.4
IZAN	-0.015	0.008	0.004	-0.016	0.007	0.004	-0.024	0.026	0.01	0.003	0.004	35514	58.8	5255	8.7
LP01	-0.021	0.006	0.004	-0.01	0.016	0.004	-0.055	0.032	0.016	0.003	0.008	56465	93.6	25073	41.5
LP03	-0.013	0.018	0.004	-0.015	0.014	0.004	-0.06	0.022	0.012	0.003	0.008	7801	12.9	7666	12.7
LPAL	-0.022	0.001	0.003	-0.0	0.024	0.003	-0.06	0.025	0.012	0.004	0.007	58872	97.5	26850	44.5
LRES	0.0	0.018	0.004	0.003	0.027	0.004	-0.034	0.023	0.011	0.004	0.004	58149	96.3	46830	77.6
TN01	-0.023	0.029	0.009	-0.029	0.011	0.006	-0.049	0.06	0.016	0.005	0.01	53646	88.9	38722	64.2
TN02	-0.014	0.005	0.003	-0.015	0.002	0.003	-0.013	0.05	0.012	0.002	0.01	24813	41.1	16183	26.8
TN03	-0.01	0.011	0.004	-0.01	0.009	0.003	-0.027	0.028	0.009	0.002	0.005	3660	6.1	6255	10.4
TN06	-0.015	0.004	0.003	-0.013	0.003	0.003	-0.01	0.04	0.011	0.002	0.008	8632	14.3	6287	10.4
TN09	0.001	0.02	0.003	-0.017	-0.002	0.004	-0.009	0.02	0.006	0.004	0.004	51992	86.1	11633	19.3
TE11	-0.009	0.009	0.003	-0.02	0.003	0.004	-0.026	0.029	0.01	0.003	0.006	31628	52.4	10334	17.1
Mean	-0.012	0.012	0.004	-0.011	0.013	0.004	-0.031	0.034	0.011	0.003	0.007	37116.9	61.5	21261.8	35.2
Min/Max	-0.023	0.029	0.009	-0.029	0.028	0.006	-0.06	0.06	0.016	0.005	0.01	60346	100.0	52215	86.5

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	93.5	92.6	93.1	95.4	92.3
considering satellites with dual-frequency fixed	90.9	90.2	89.9	93.1	89.7
considering all signals separately	91.2	90.2	89.9	93.5	89.2