

summary for network NT32

timeperiod chosen: from 2026-07-12-00:00:00 until 2026-07-12-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.3 seconds


average fixing percentage with threshold set to 0.3: 95.2 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network NT32

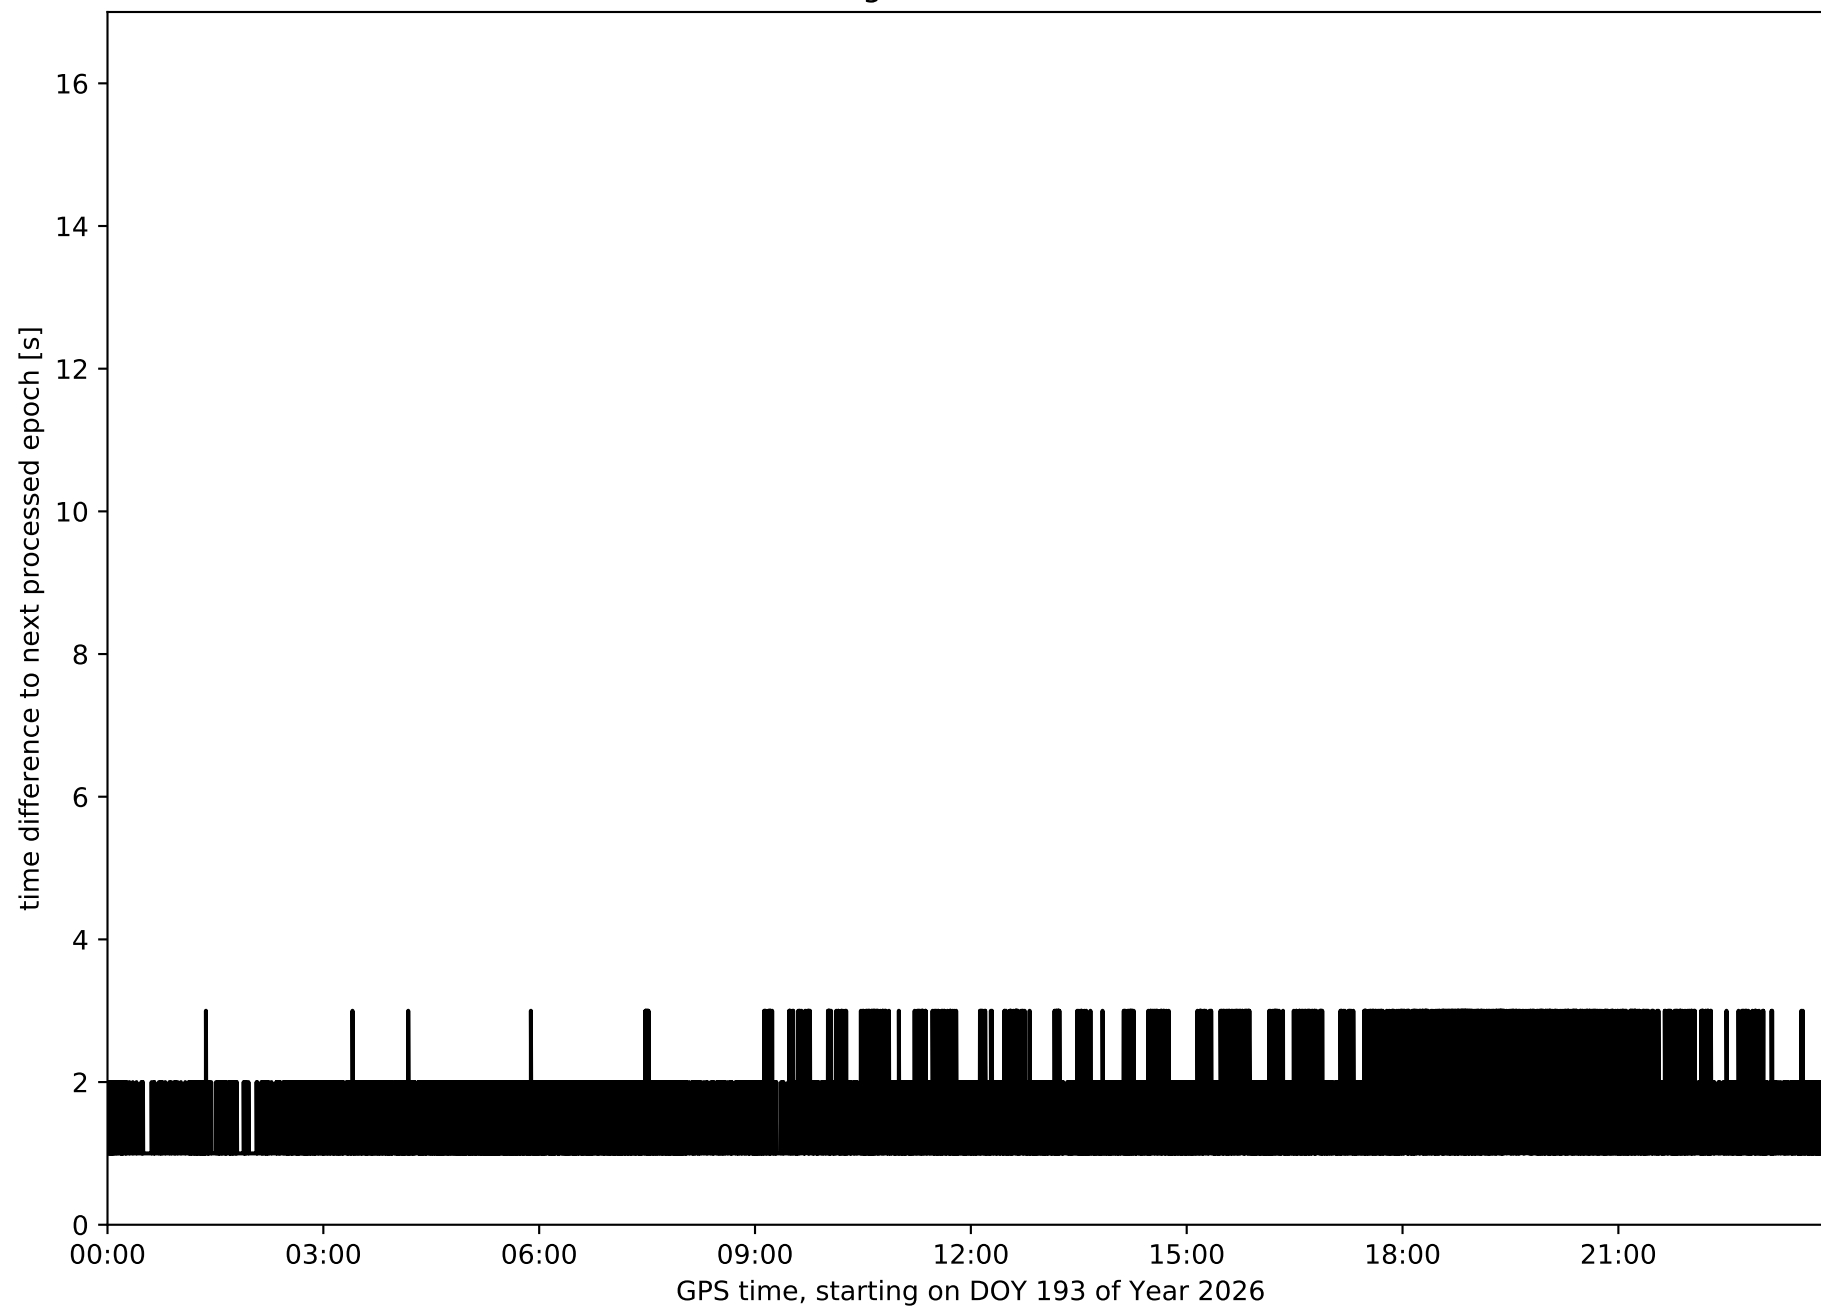


Histogram of the processing rate in network NT32 (durations larger 15 seconds neglected)

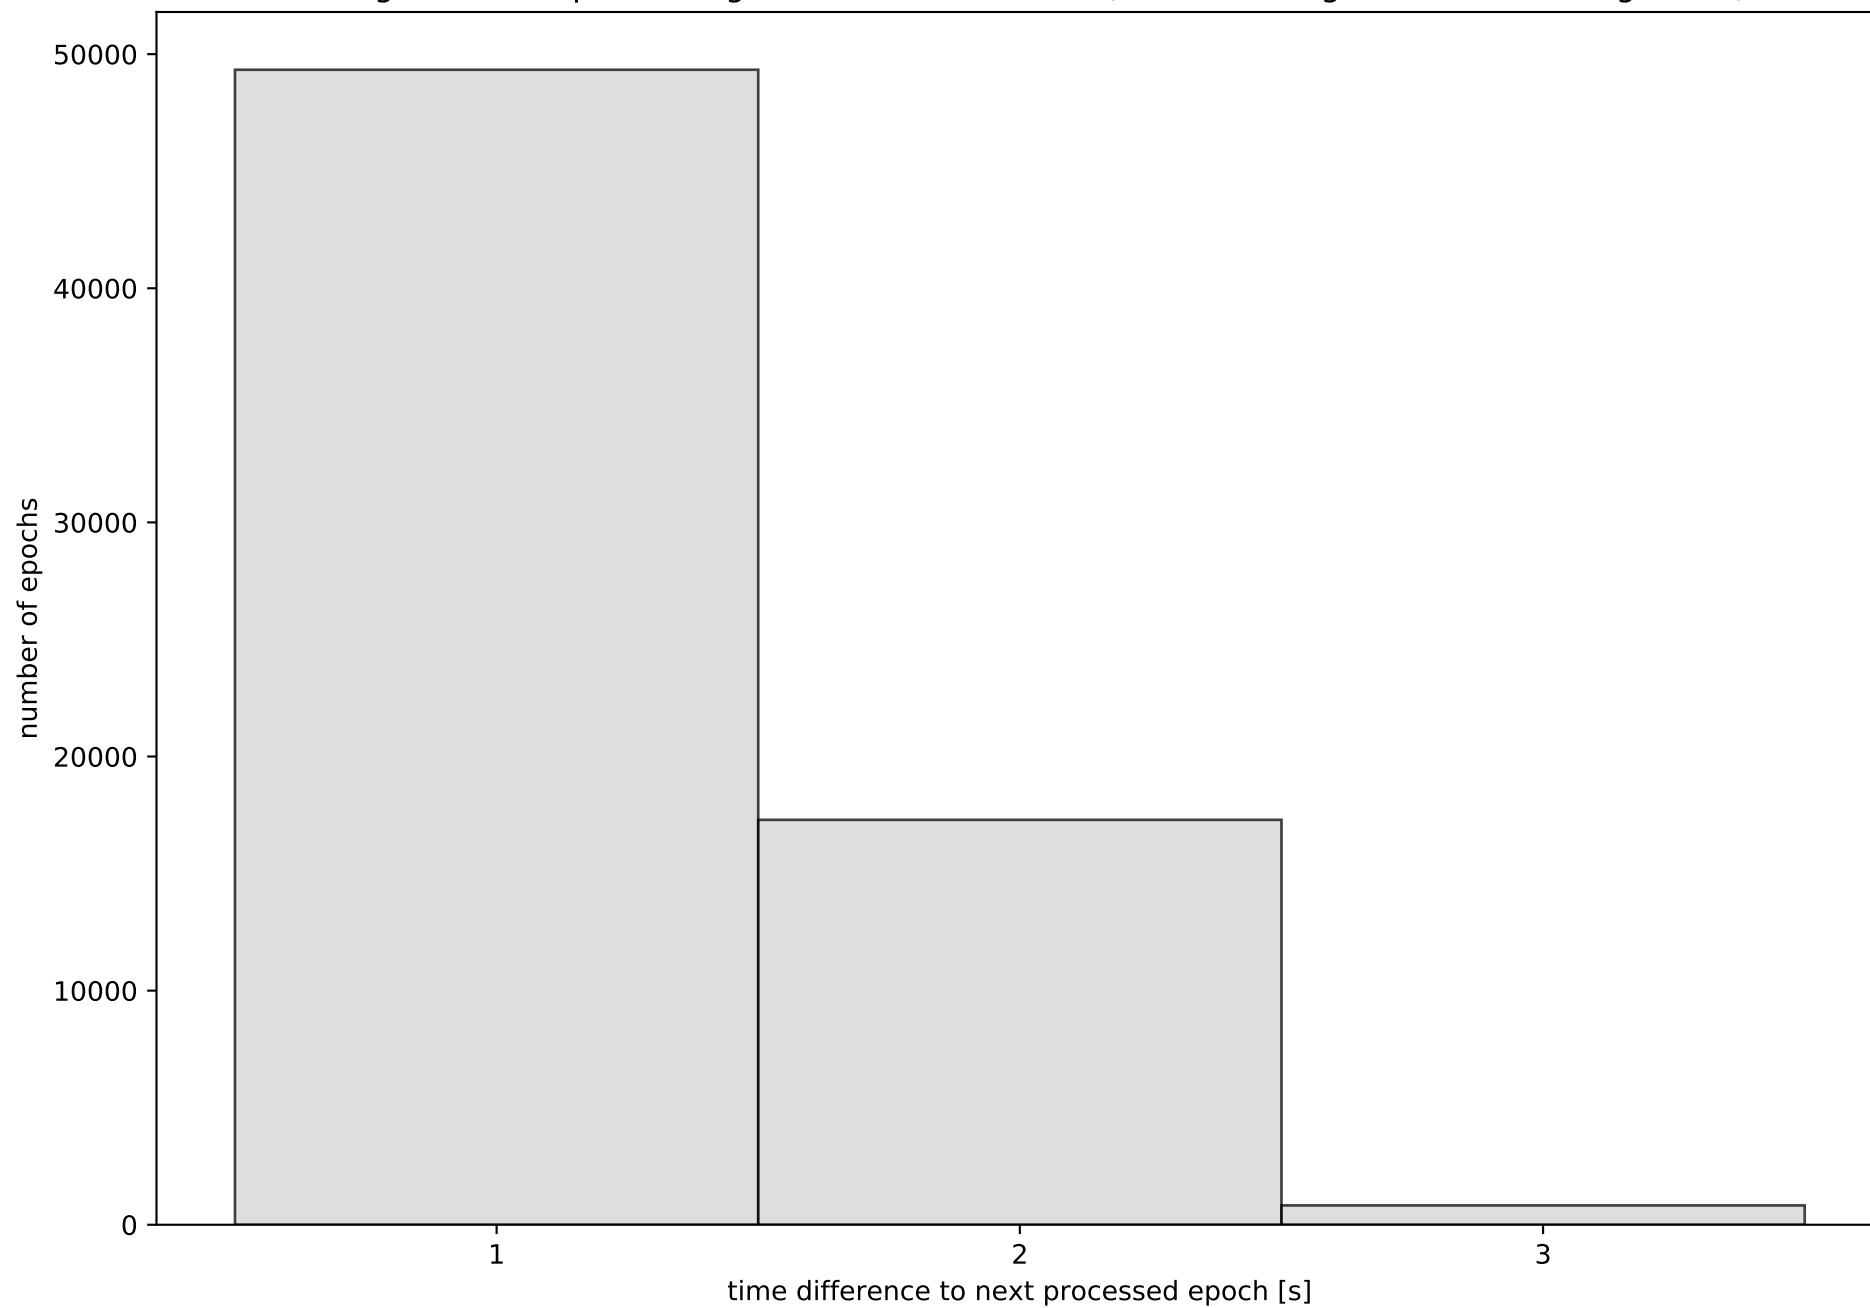


Network NT32 with threshold set to 0.3

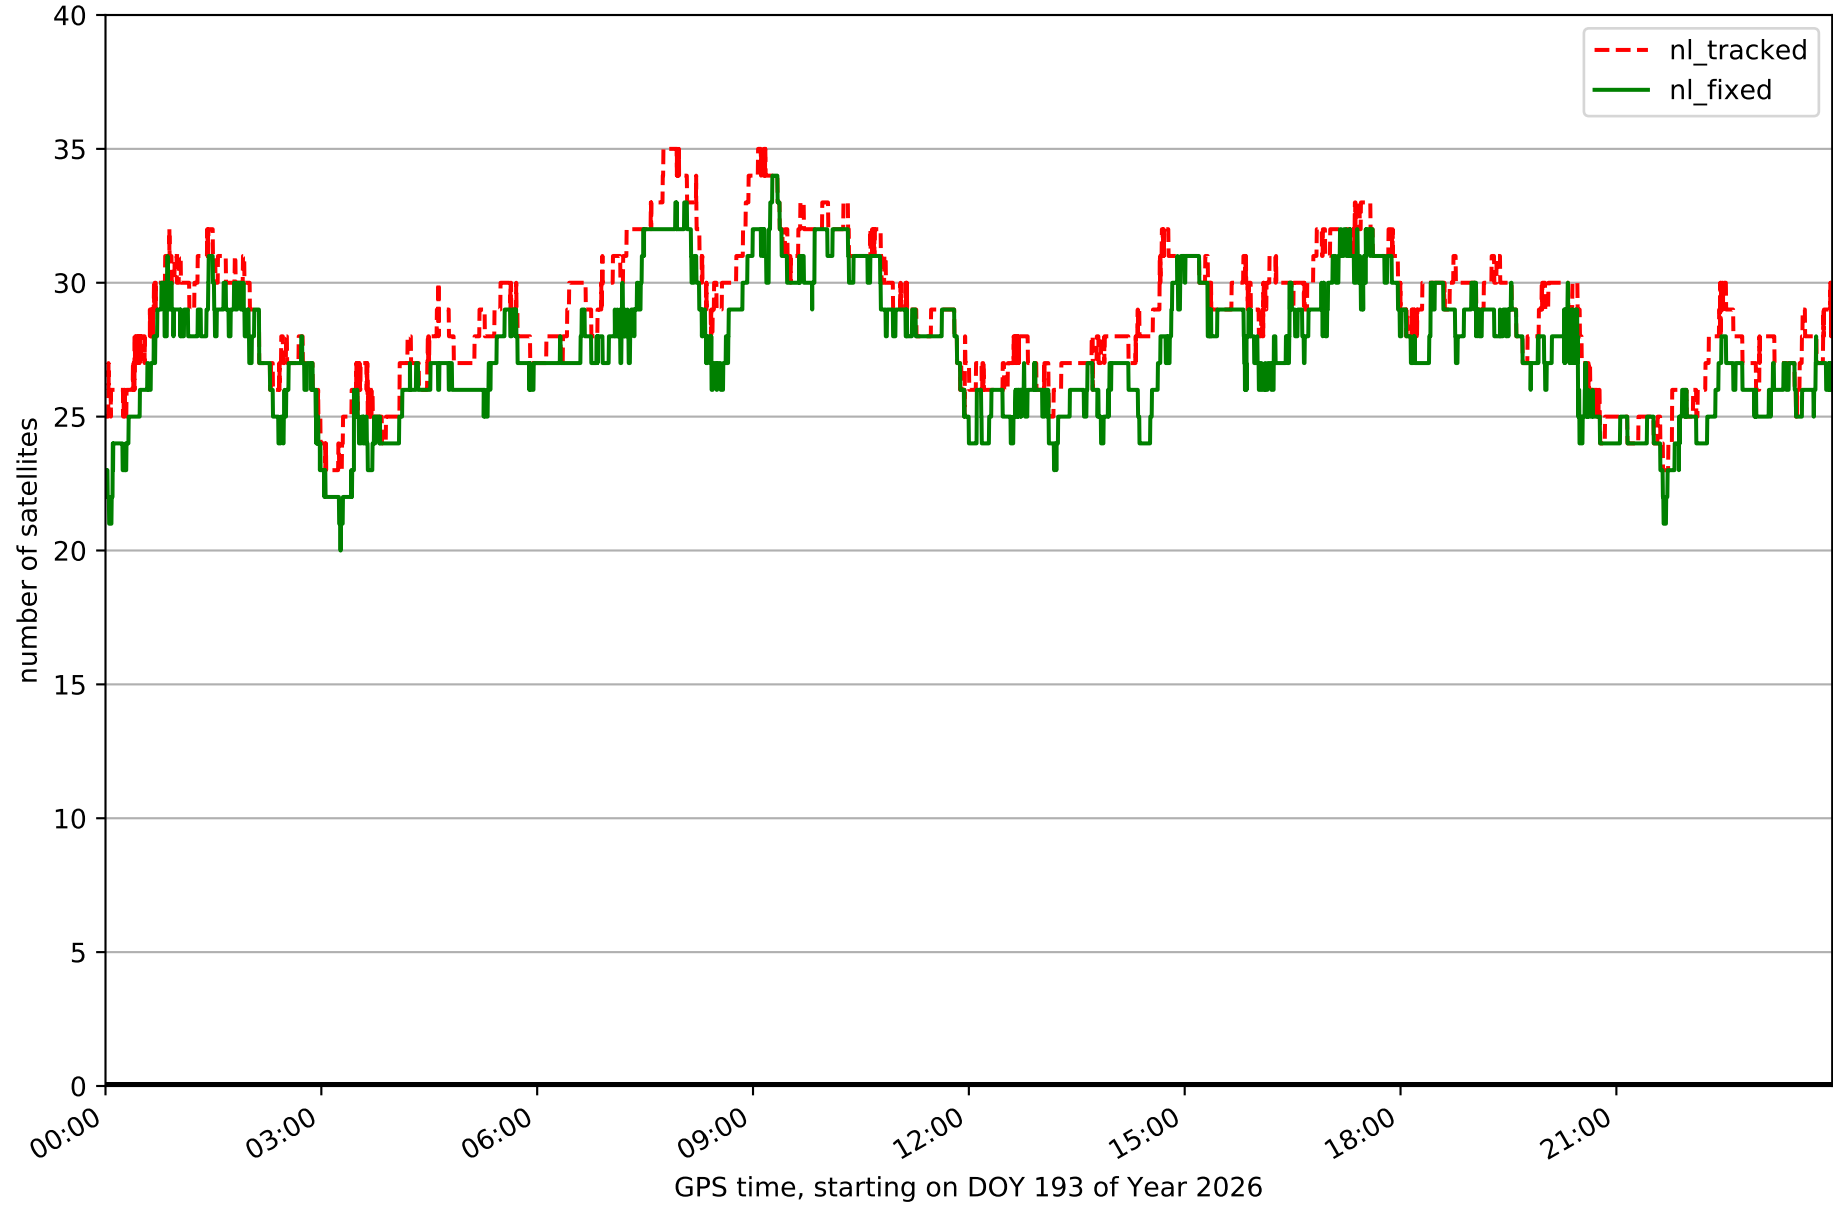


Fixing percentage of satellites in network NT32 with threshold set to 0.3

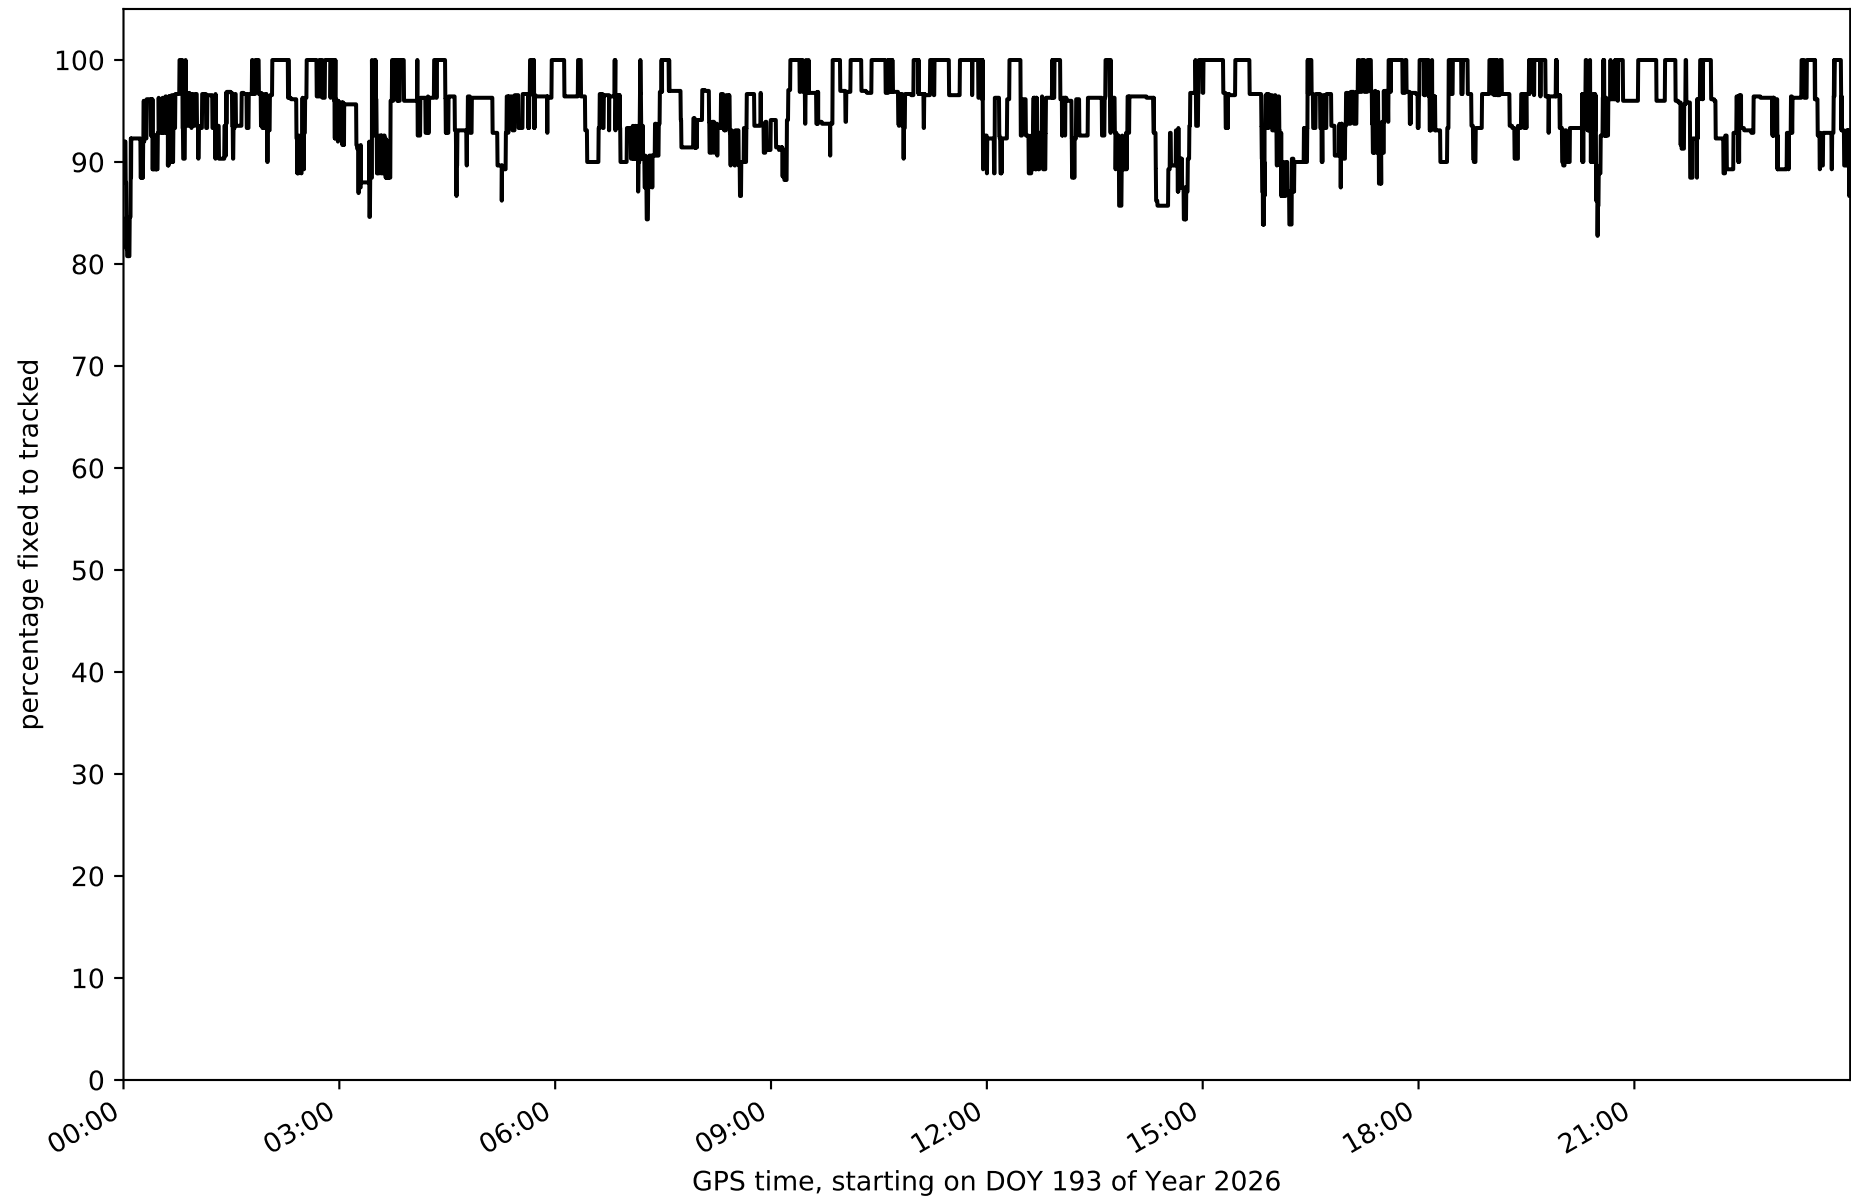


Network NT32 - only GPS with threshold set to 0.3

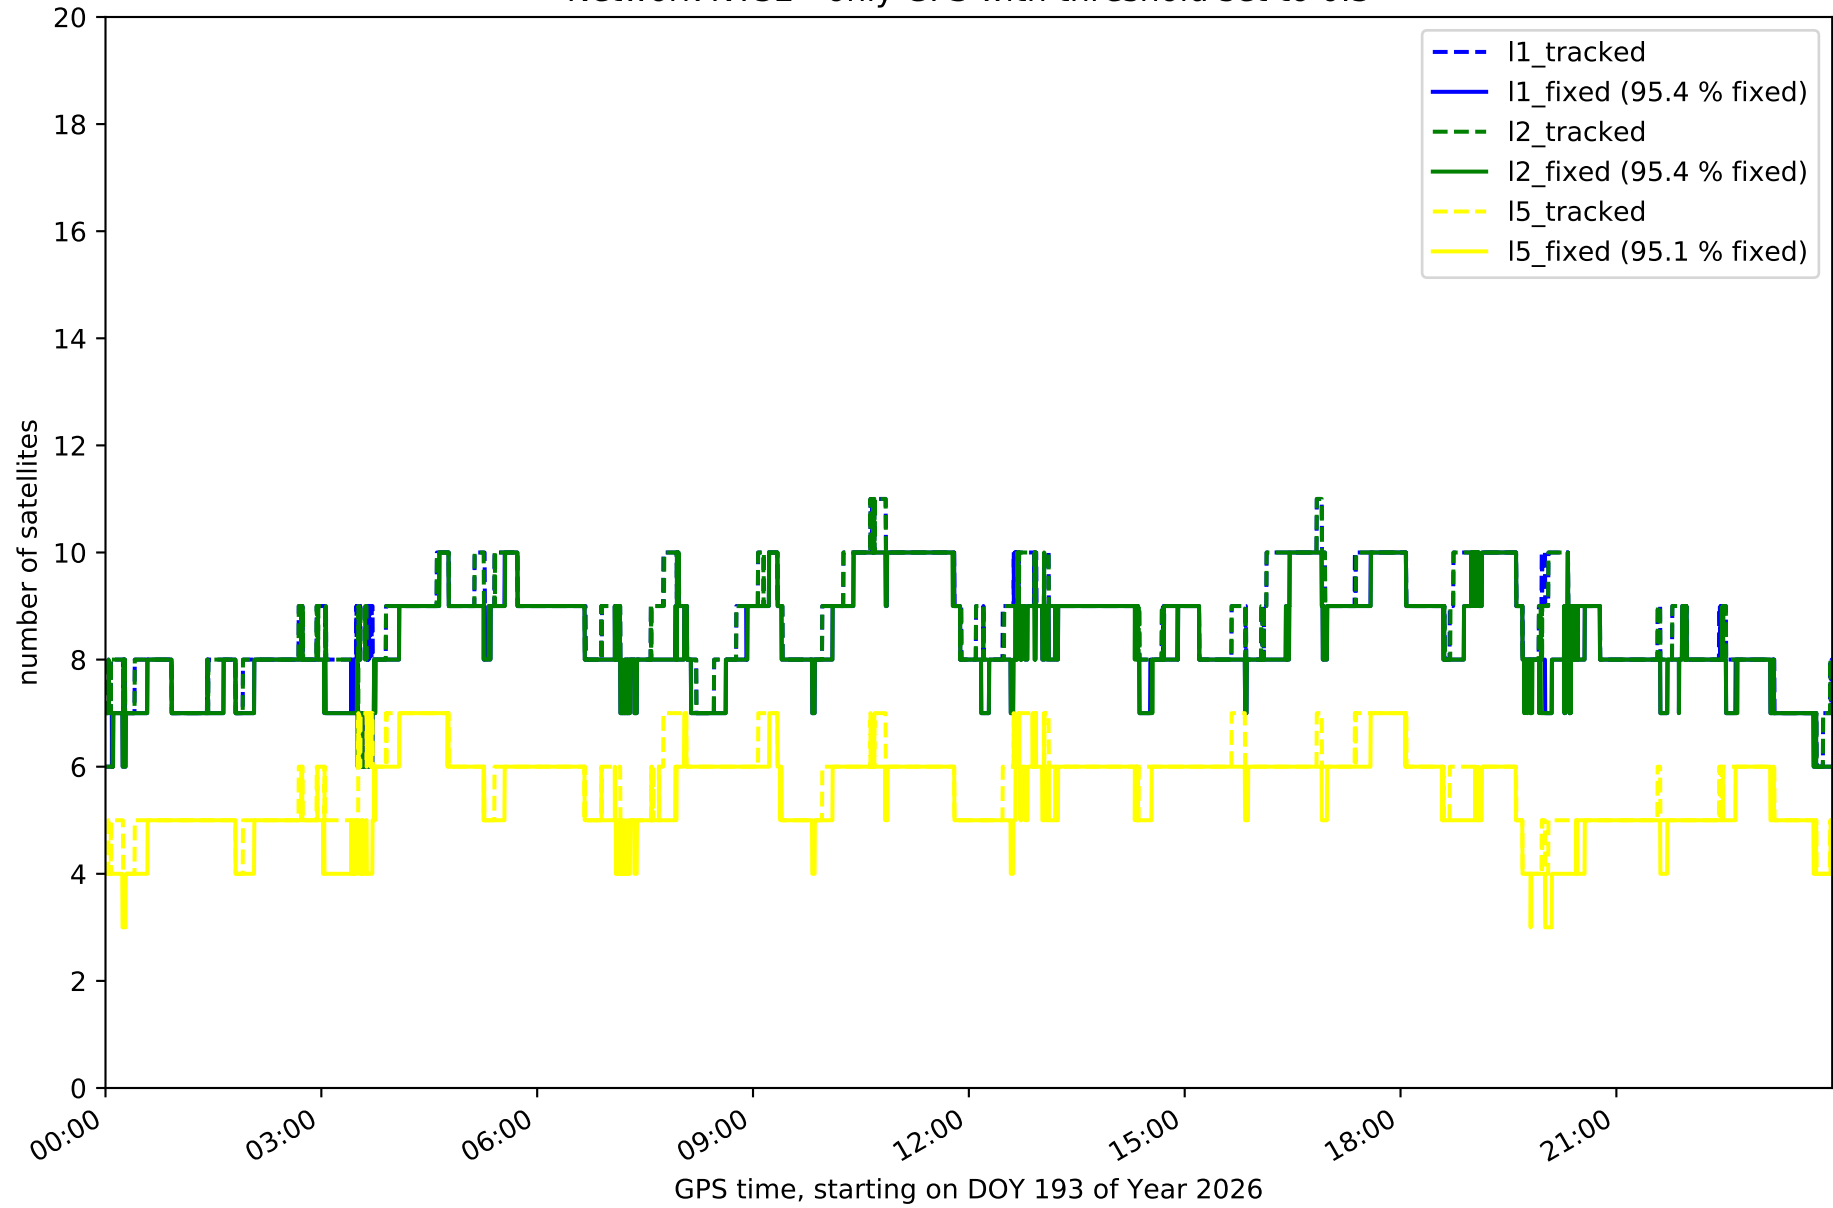


Network NT32 - only GLONASS with threshold set to 0.3

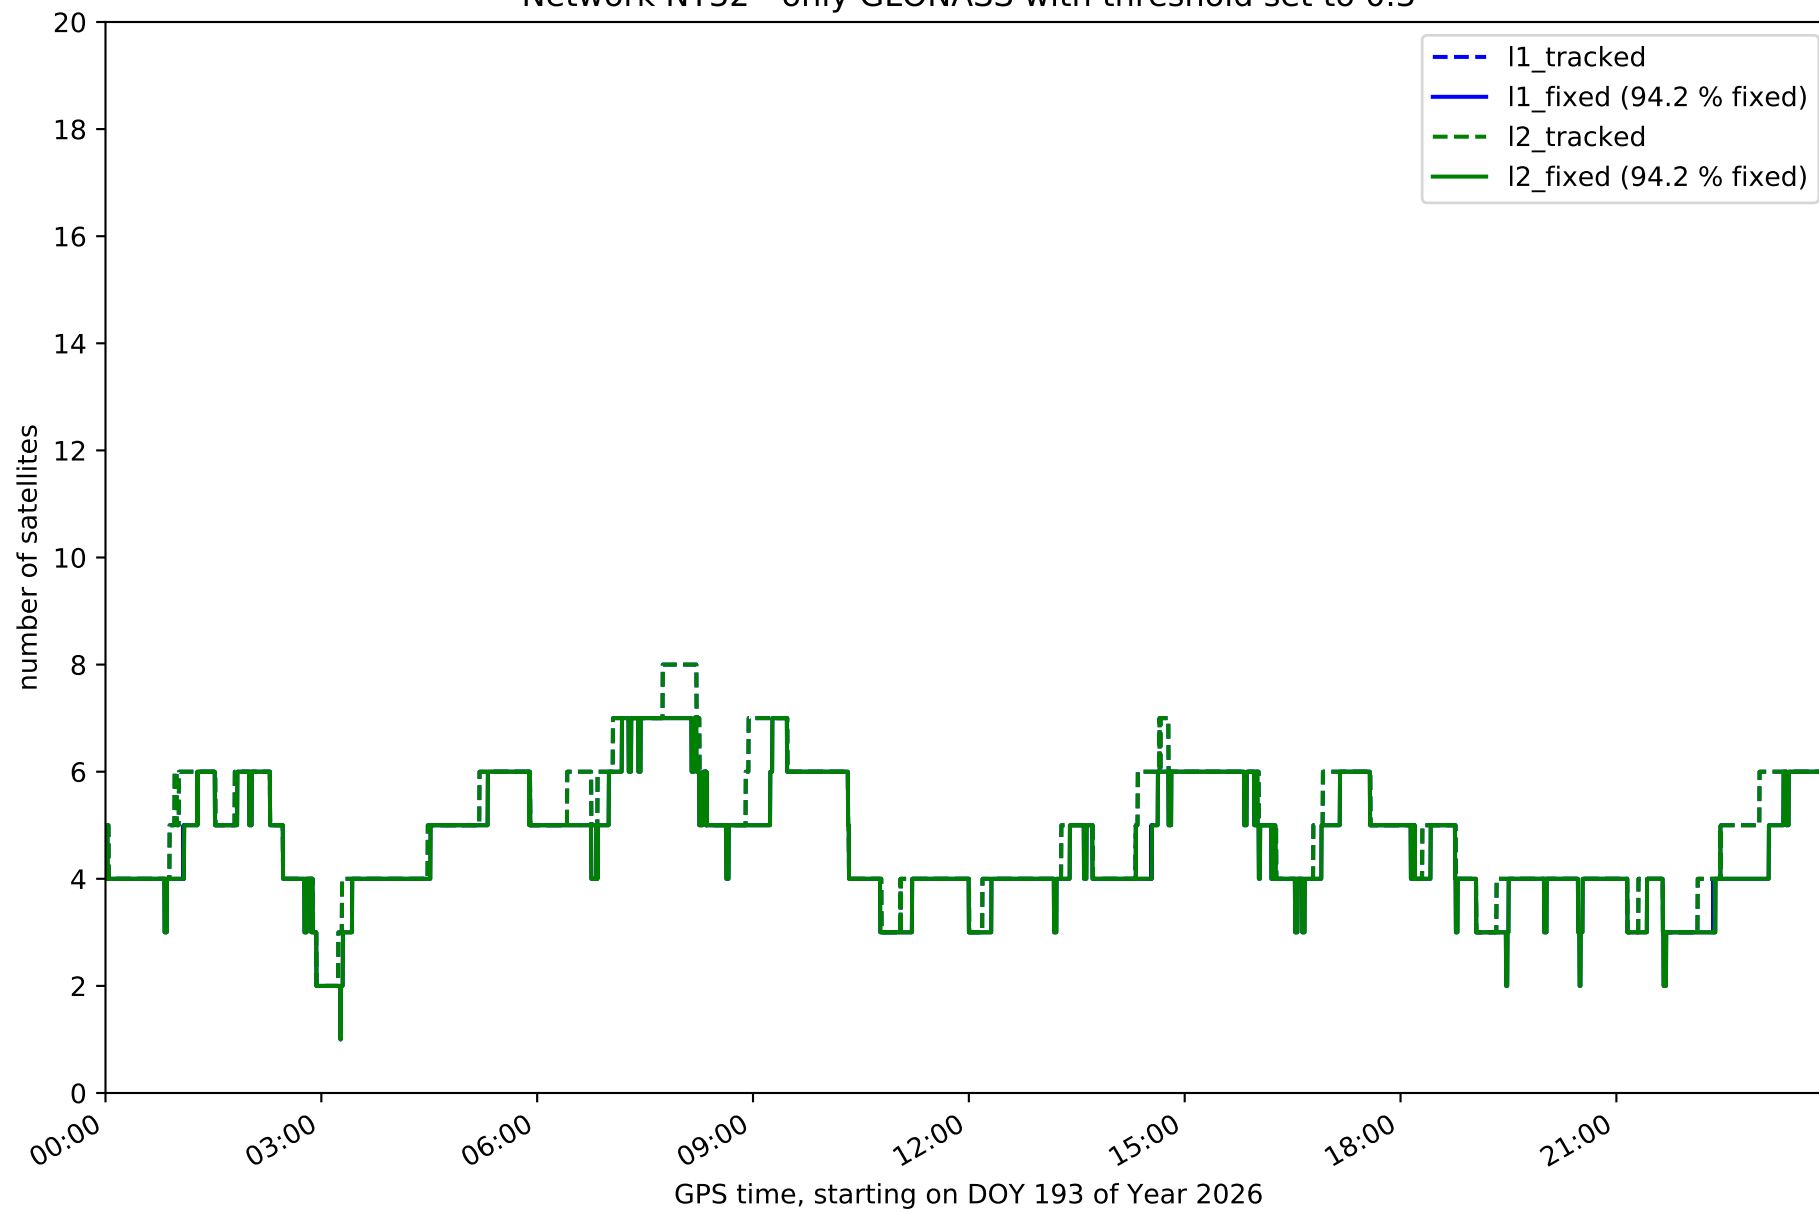


Network NT32 - only BDS with threshold set to 0.3

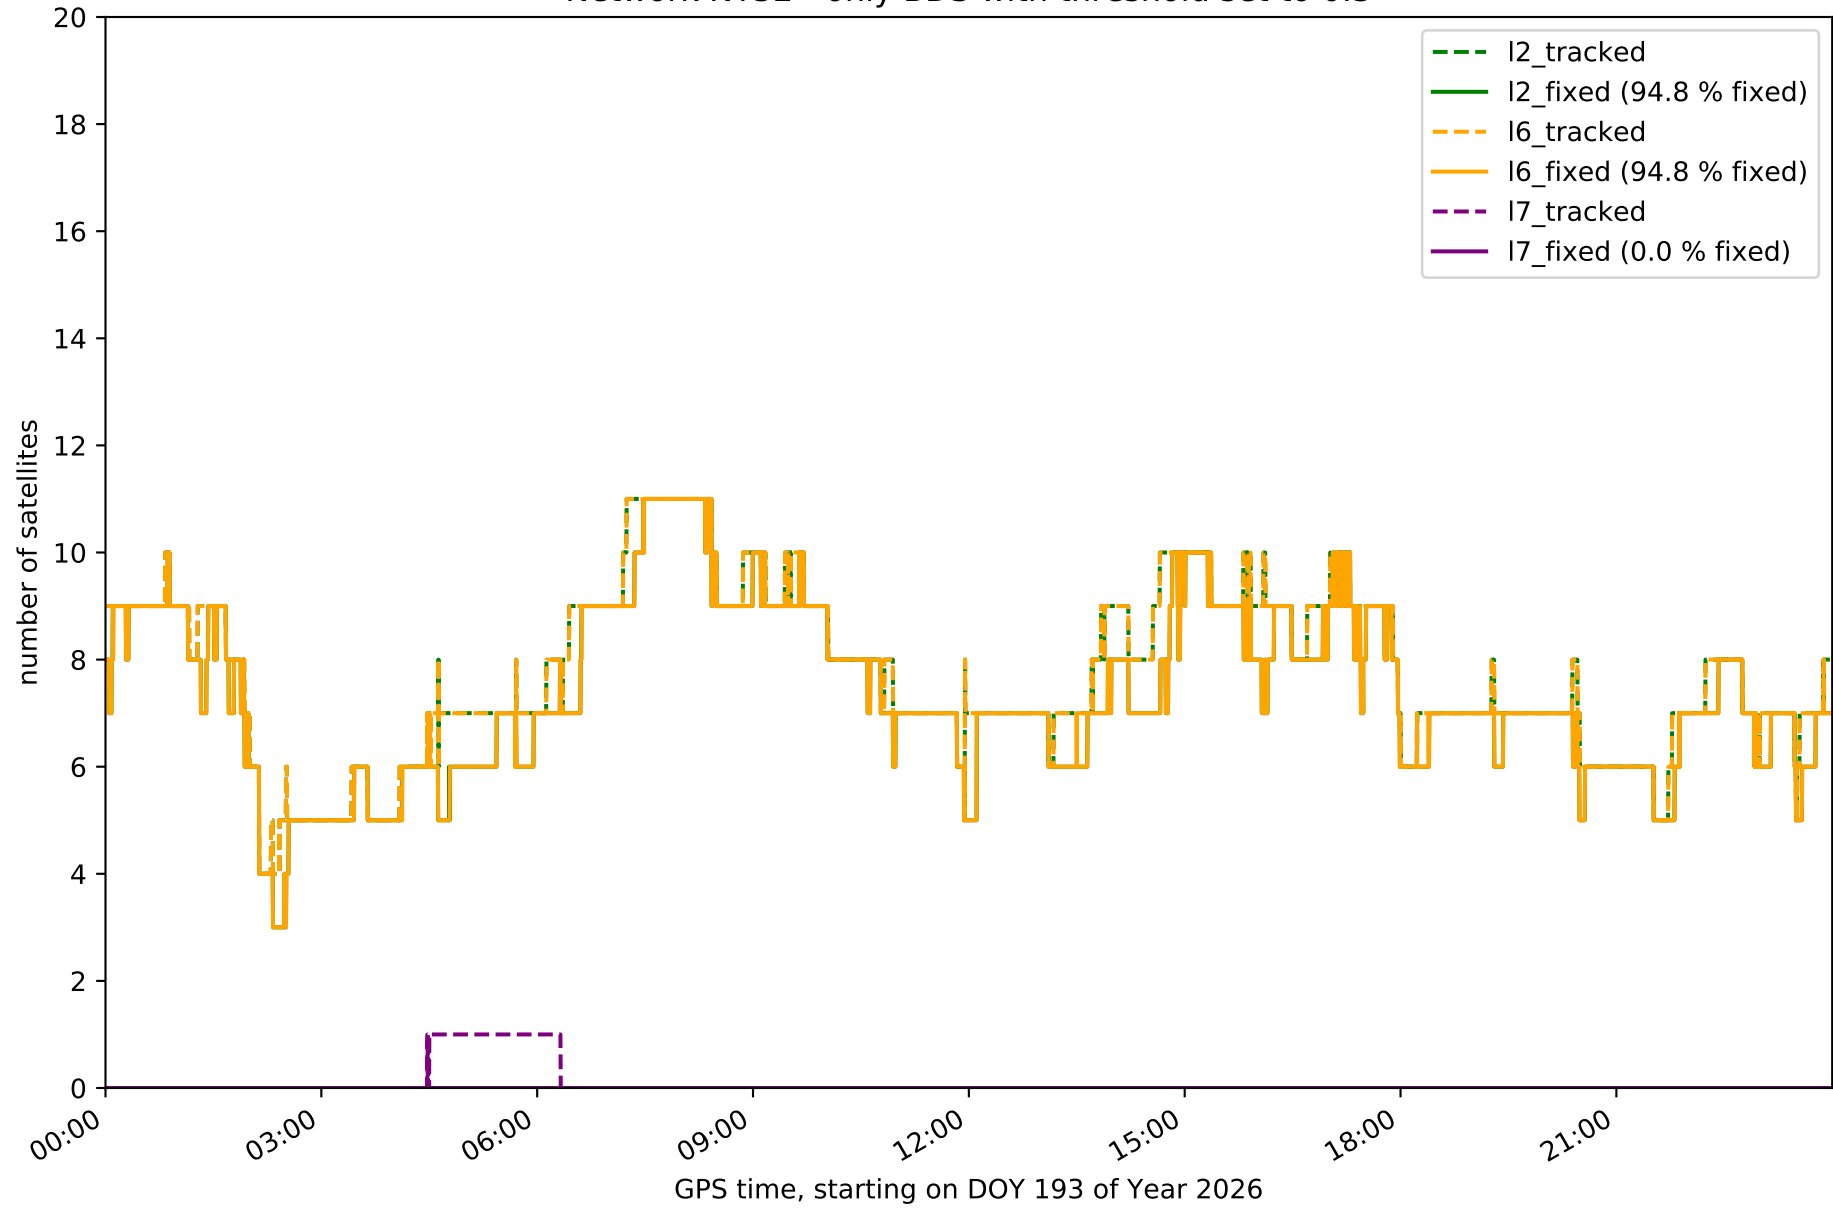


Network NT32 - only Galileo with threshold set to 0.3

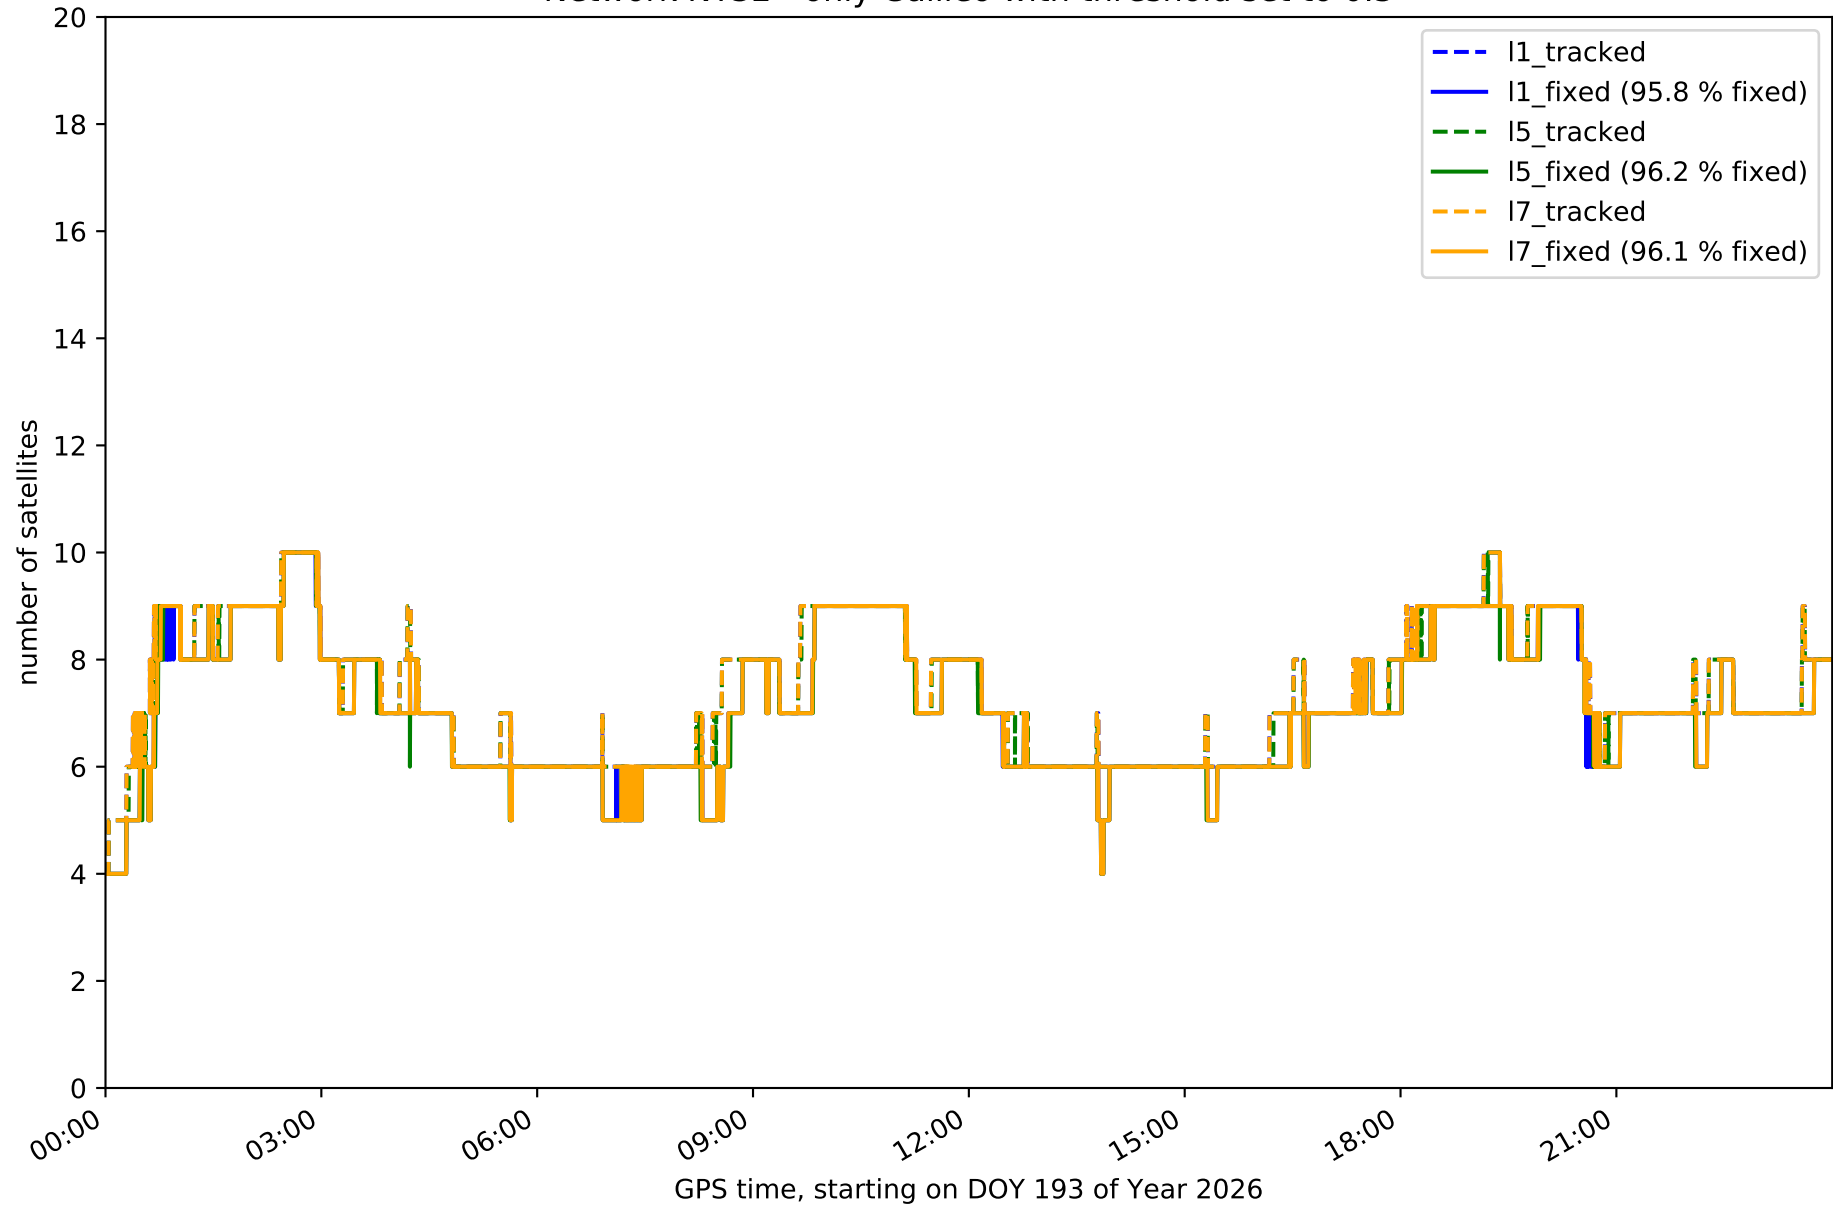


Station EH01 in network NT32

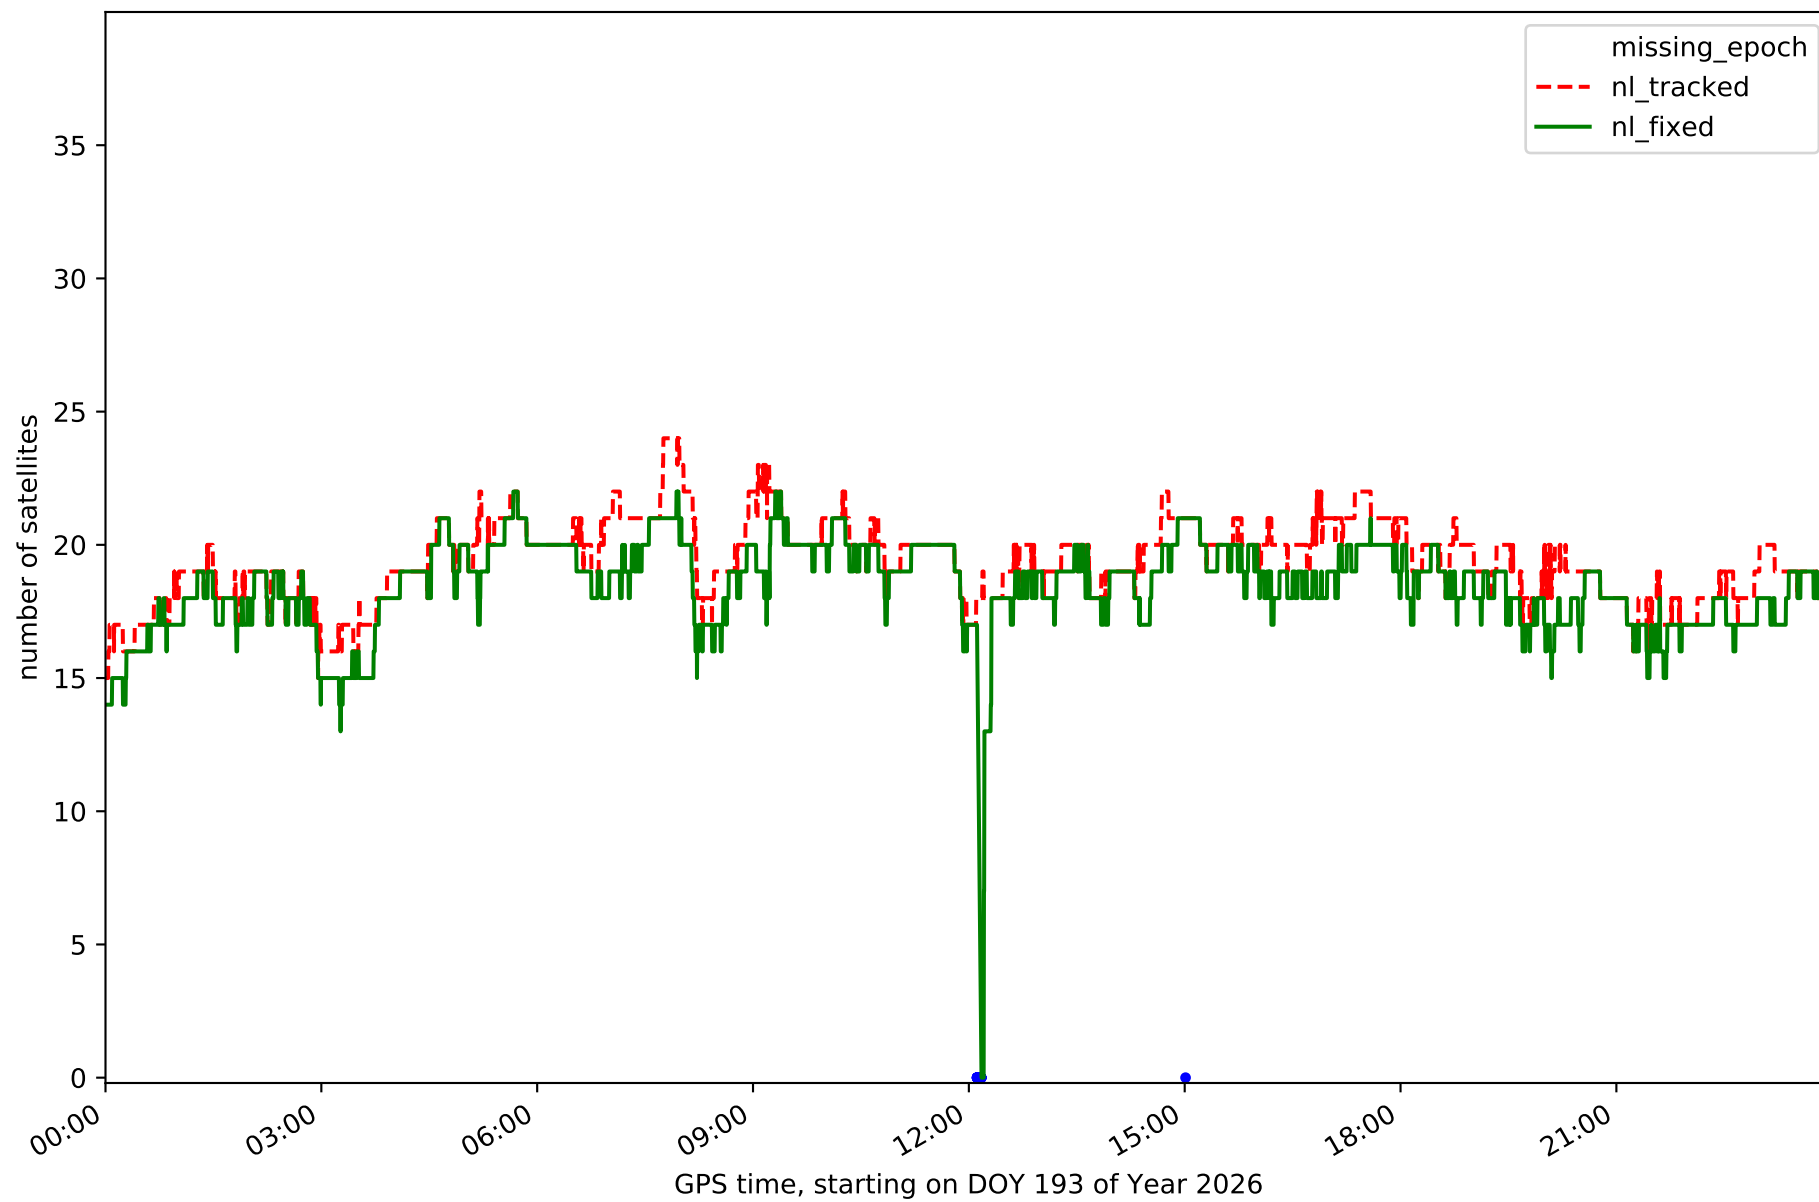


Station EH02 in network NT32

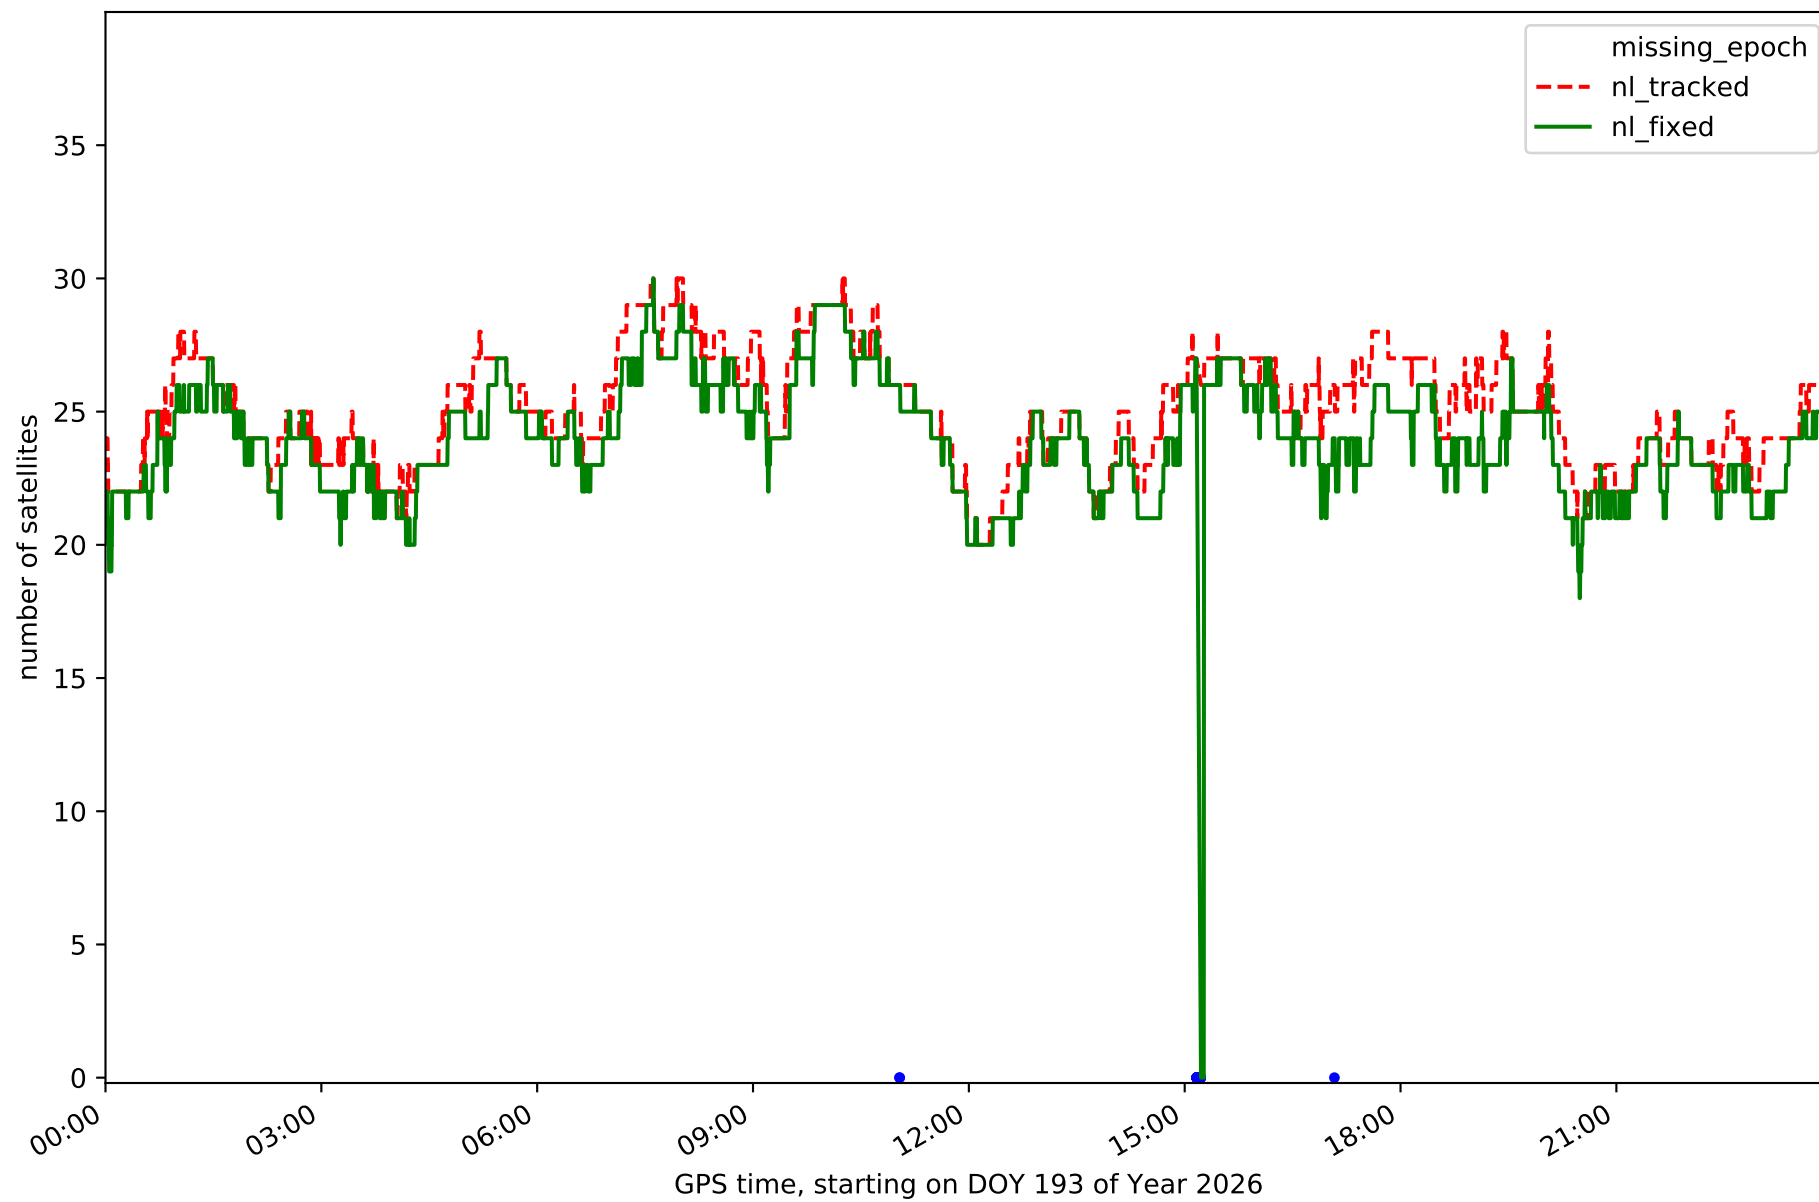


Station GOM1 in network NT32

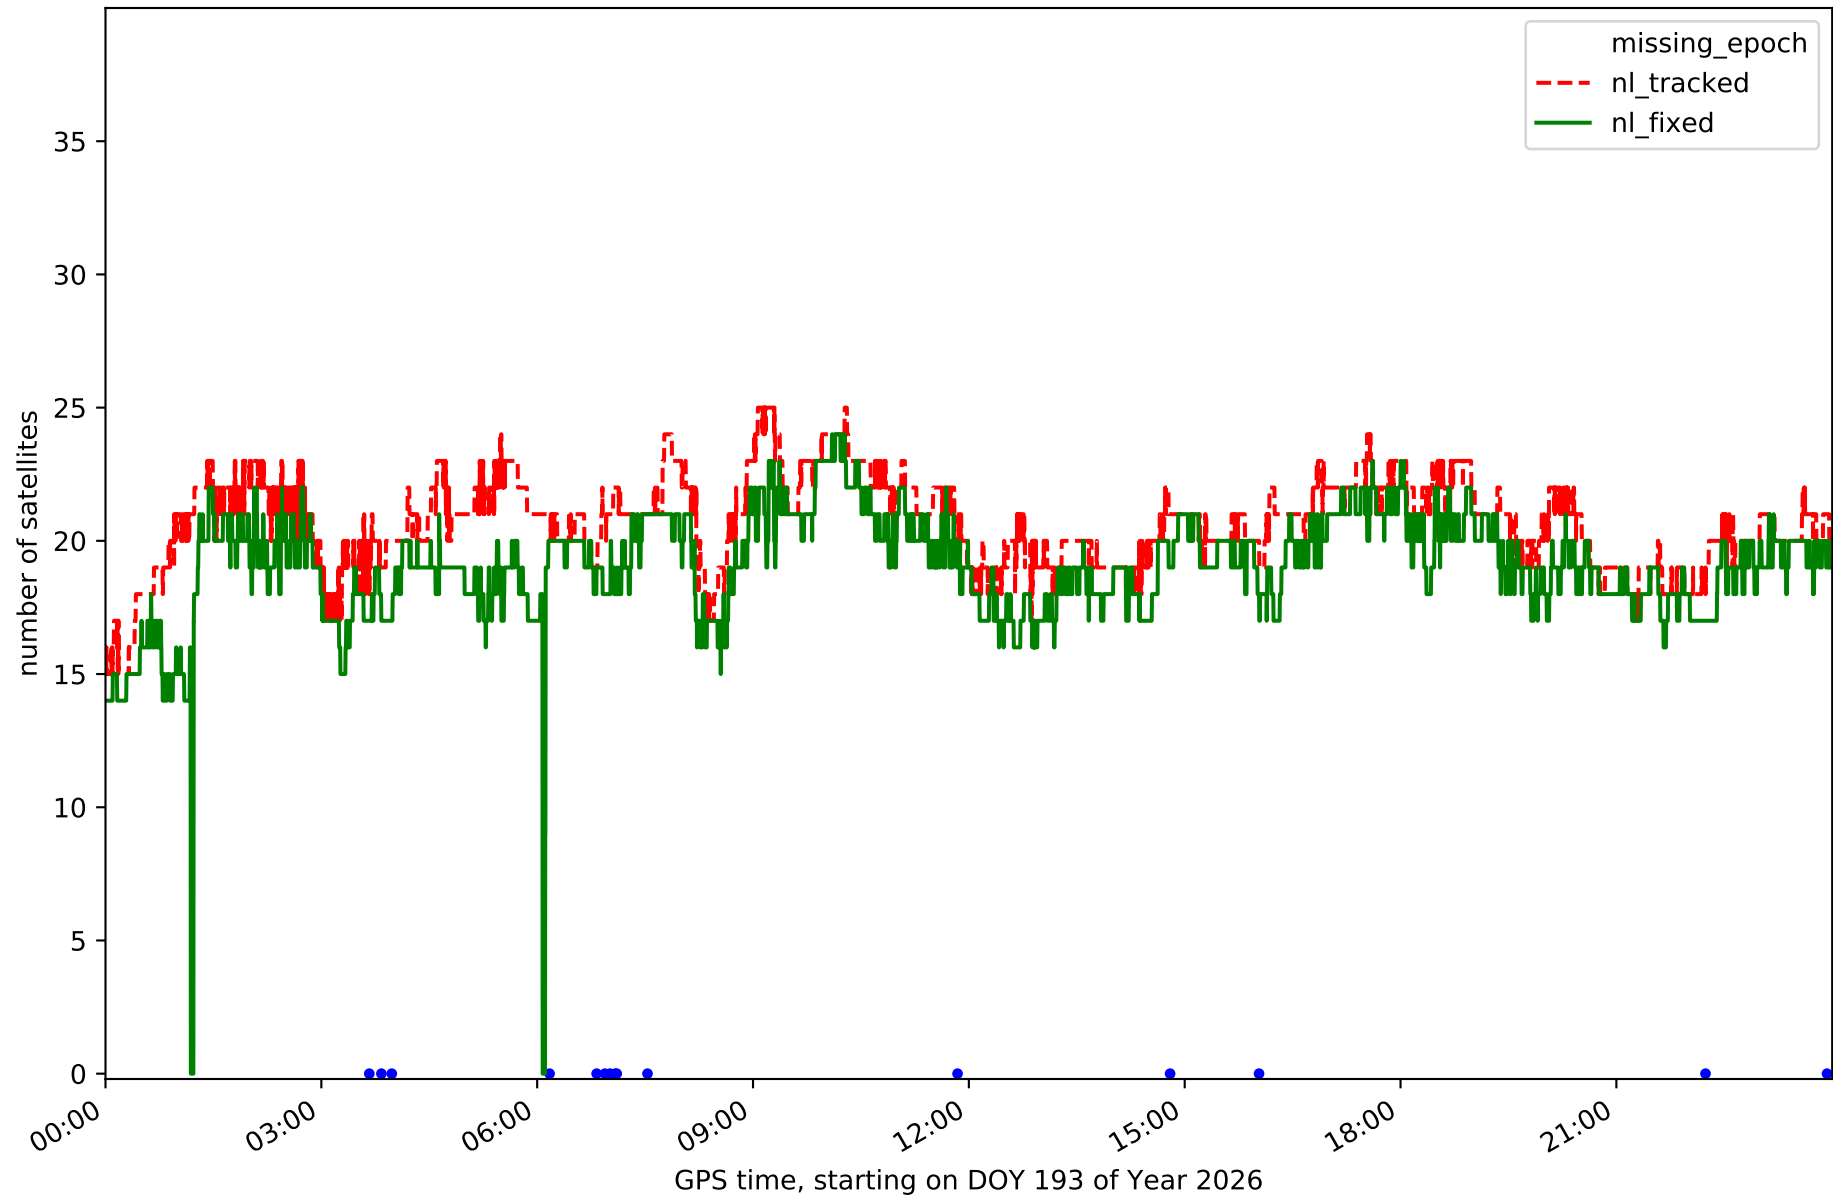


Station GOME in network NT32

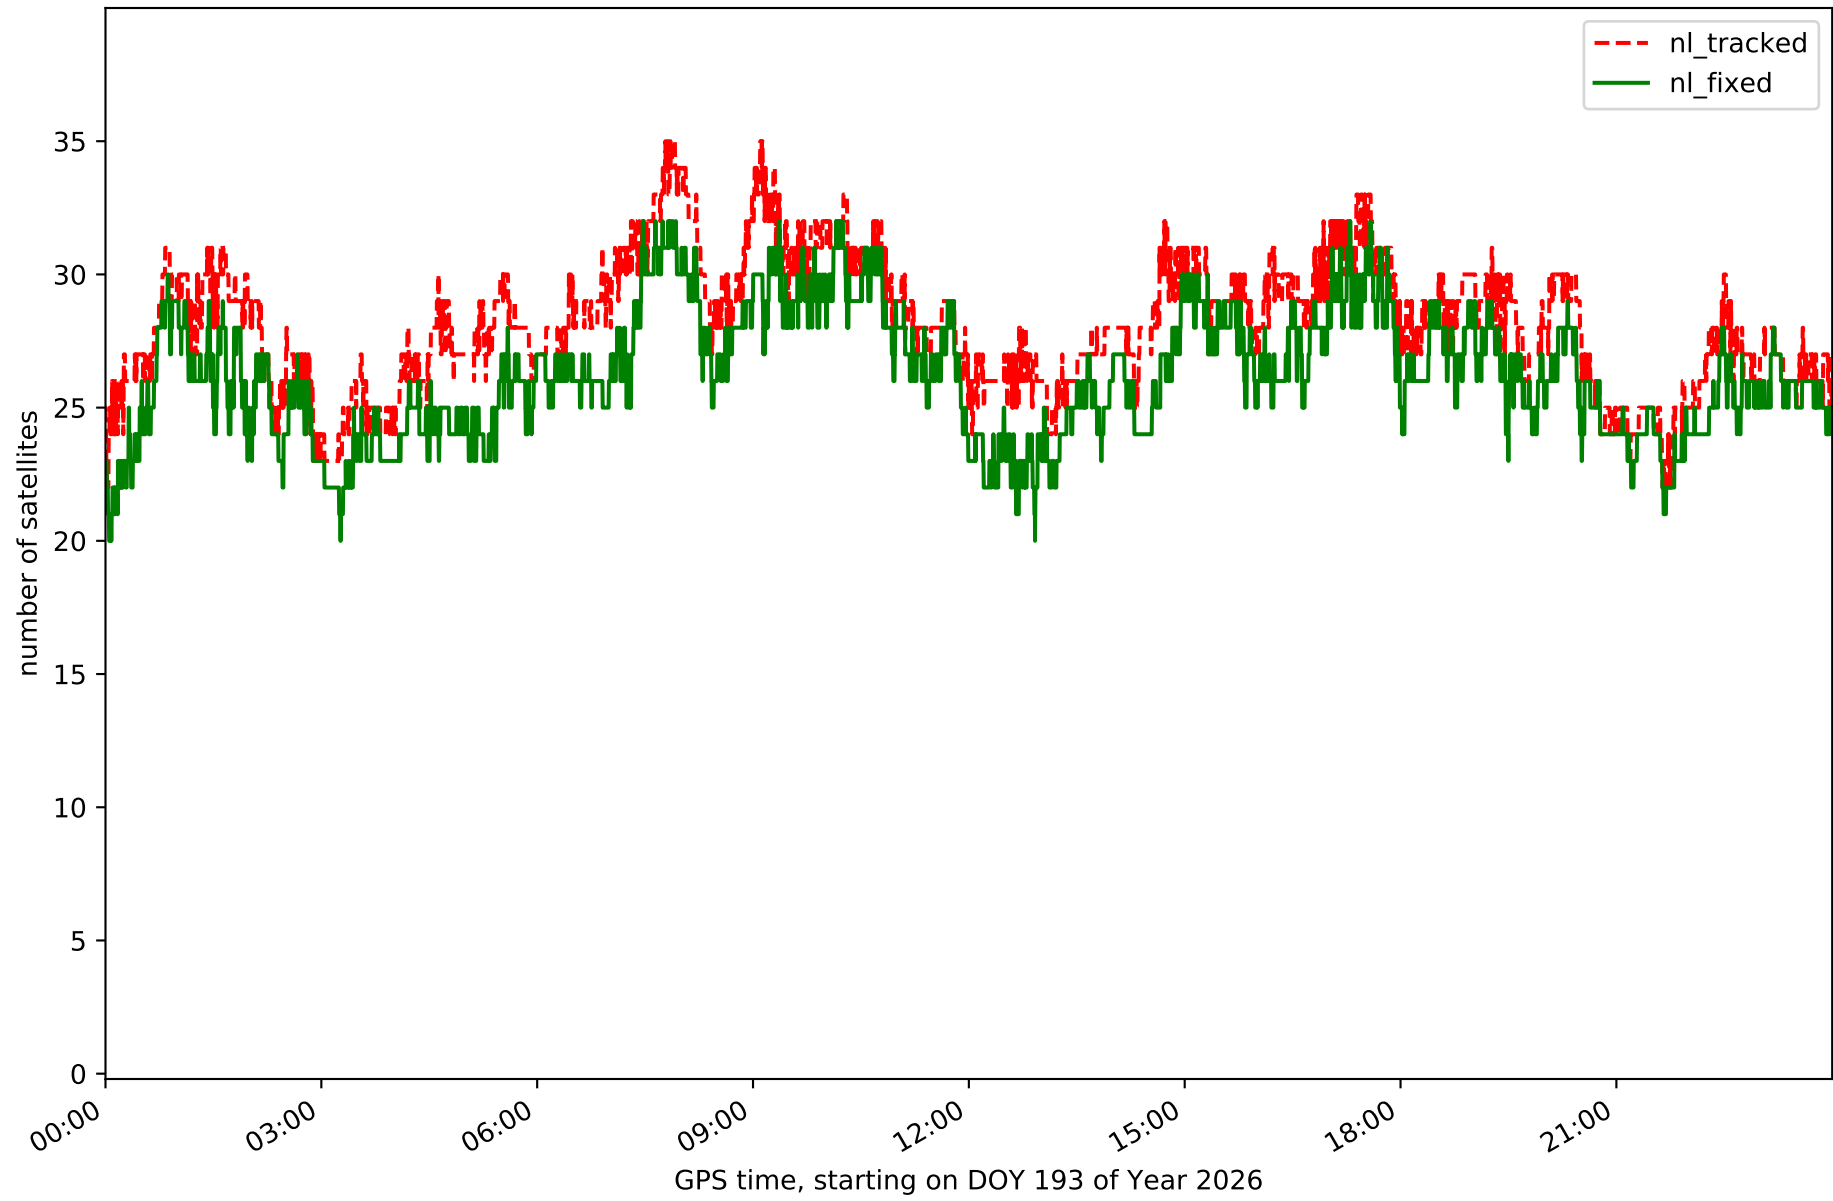


Station IZAN in network NT32

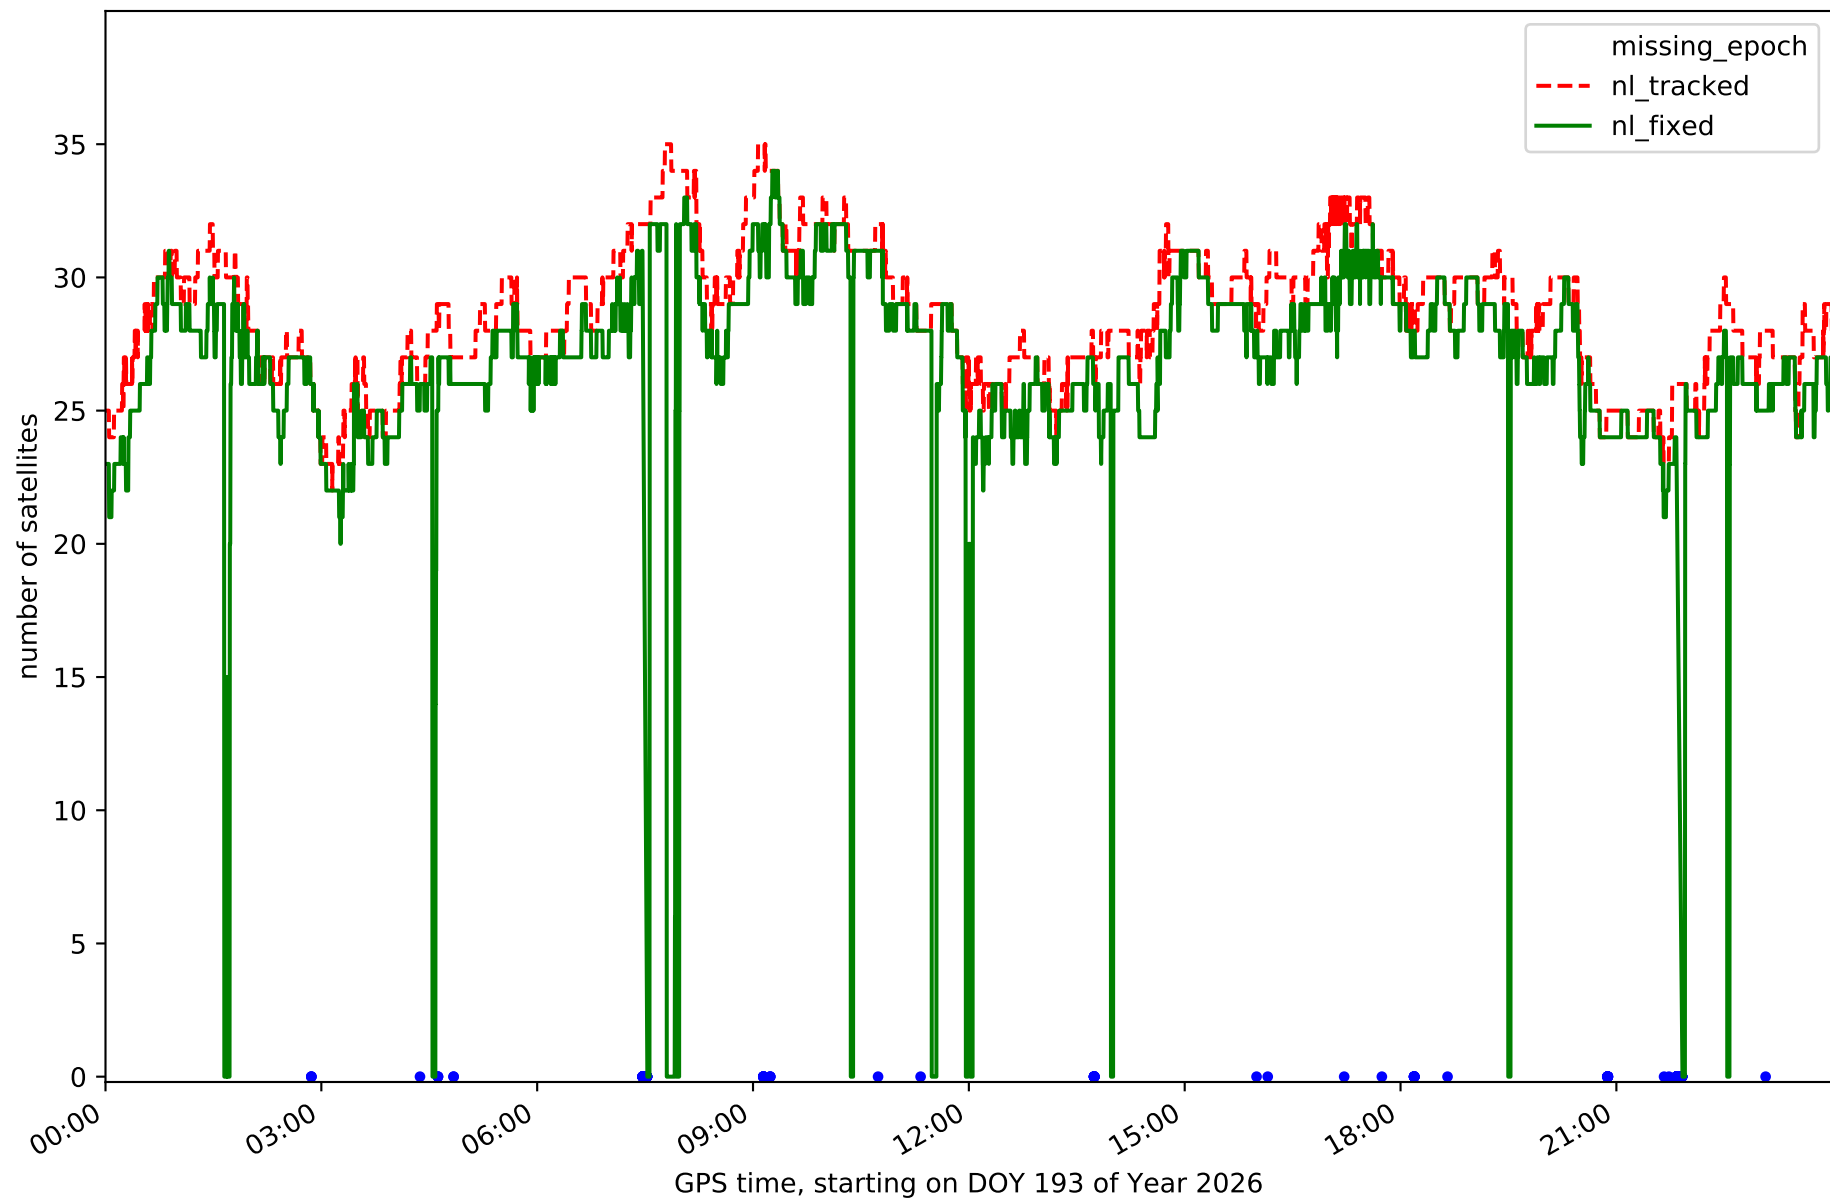


Station LP01 in network NT32

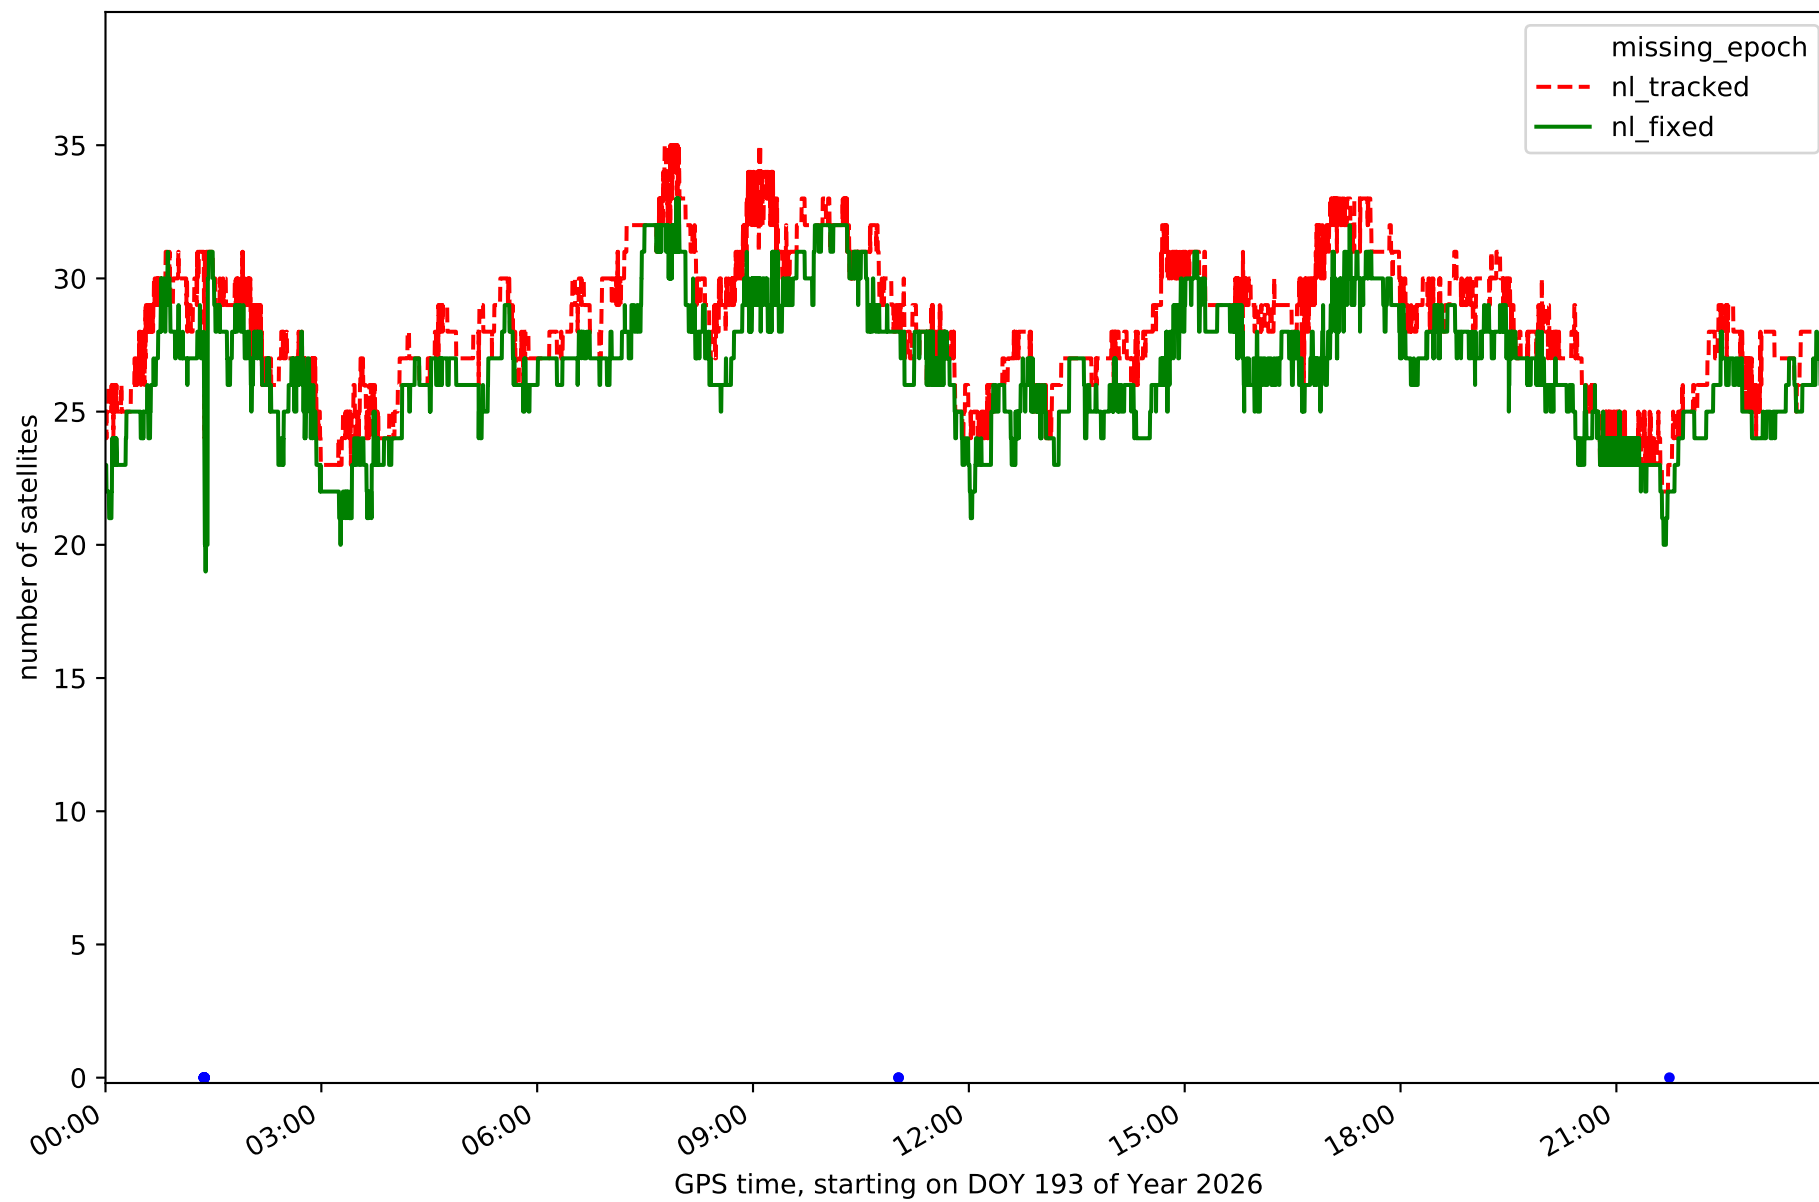


Station LP03 in network NT32

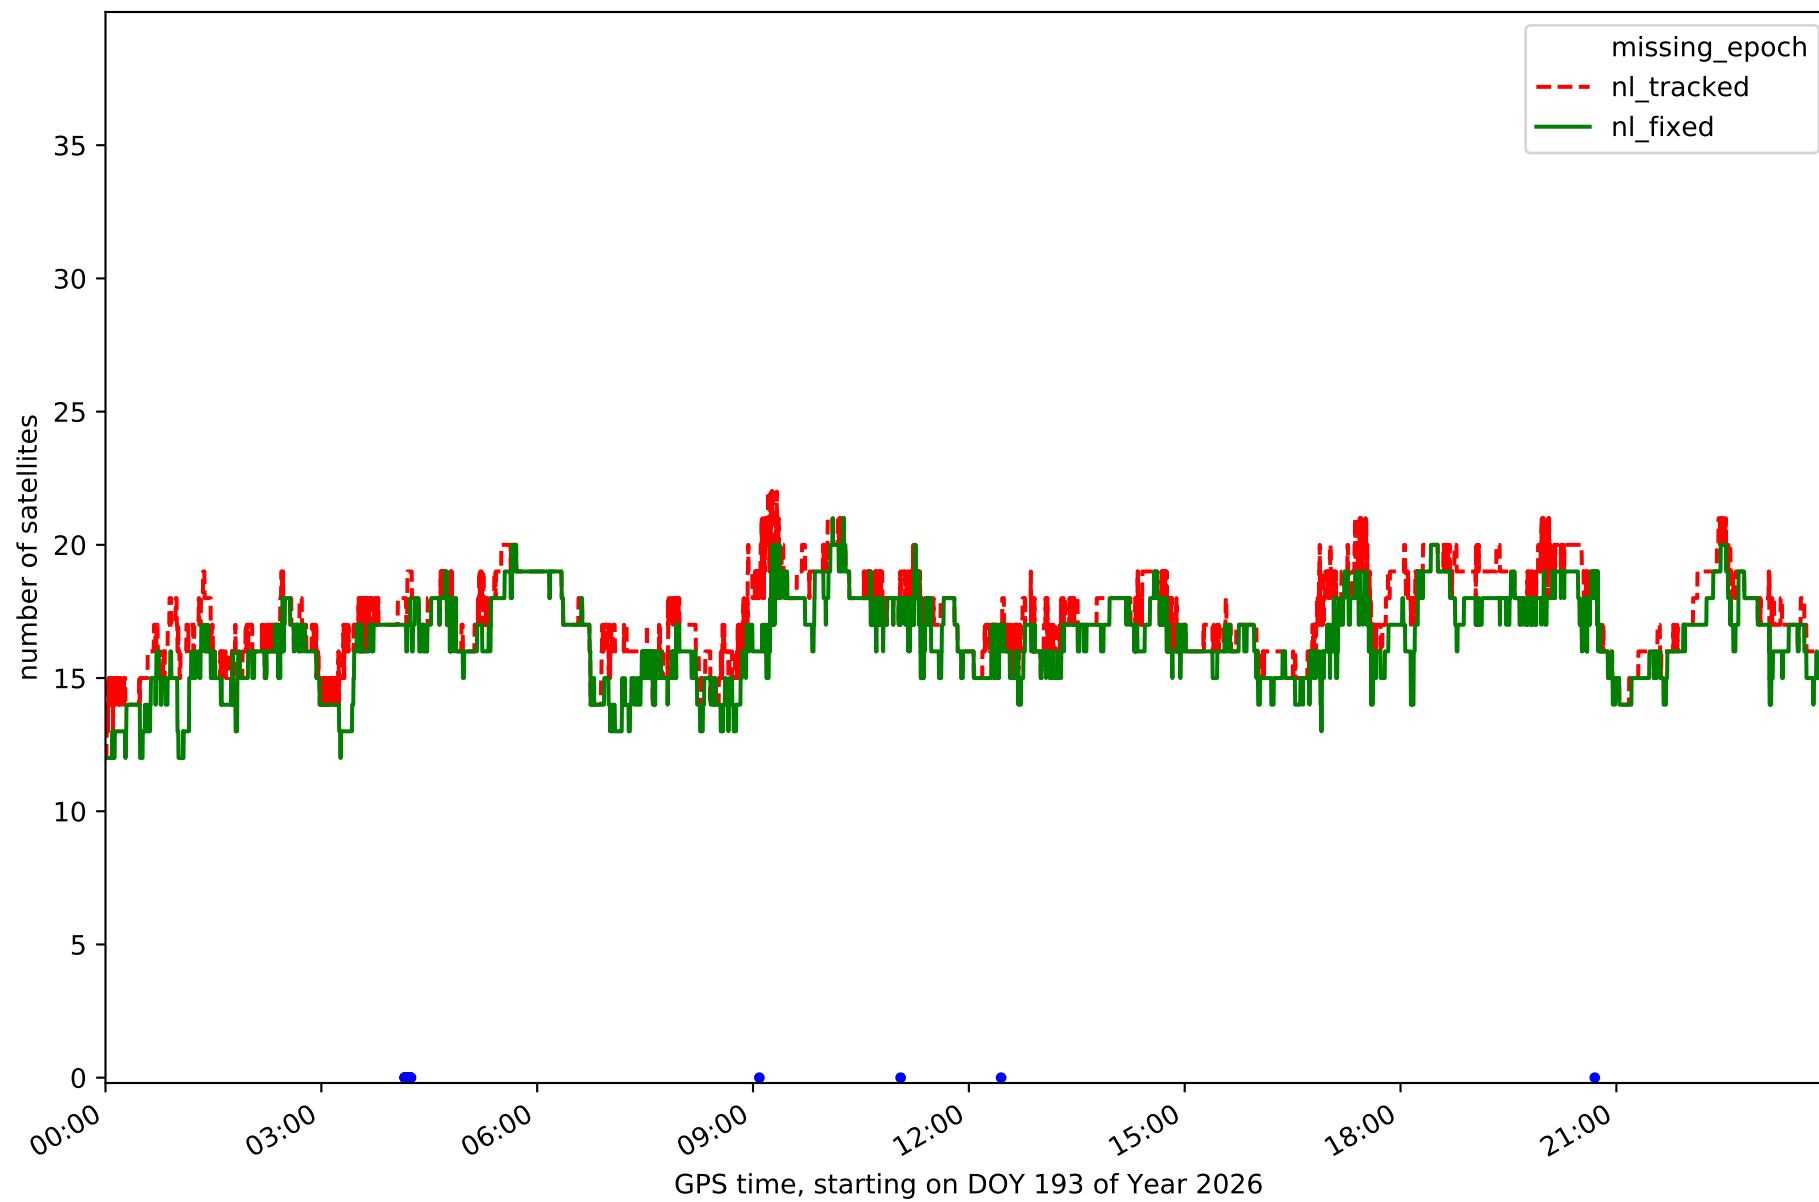


Station LPAL in network NT32

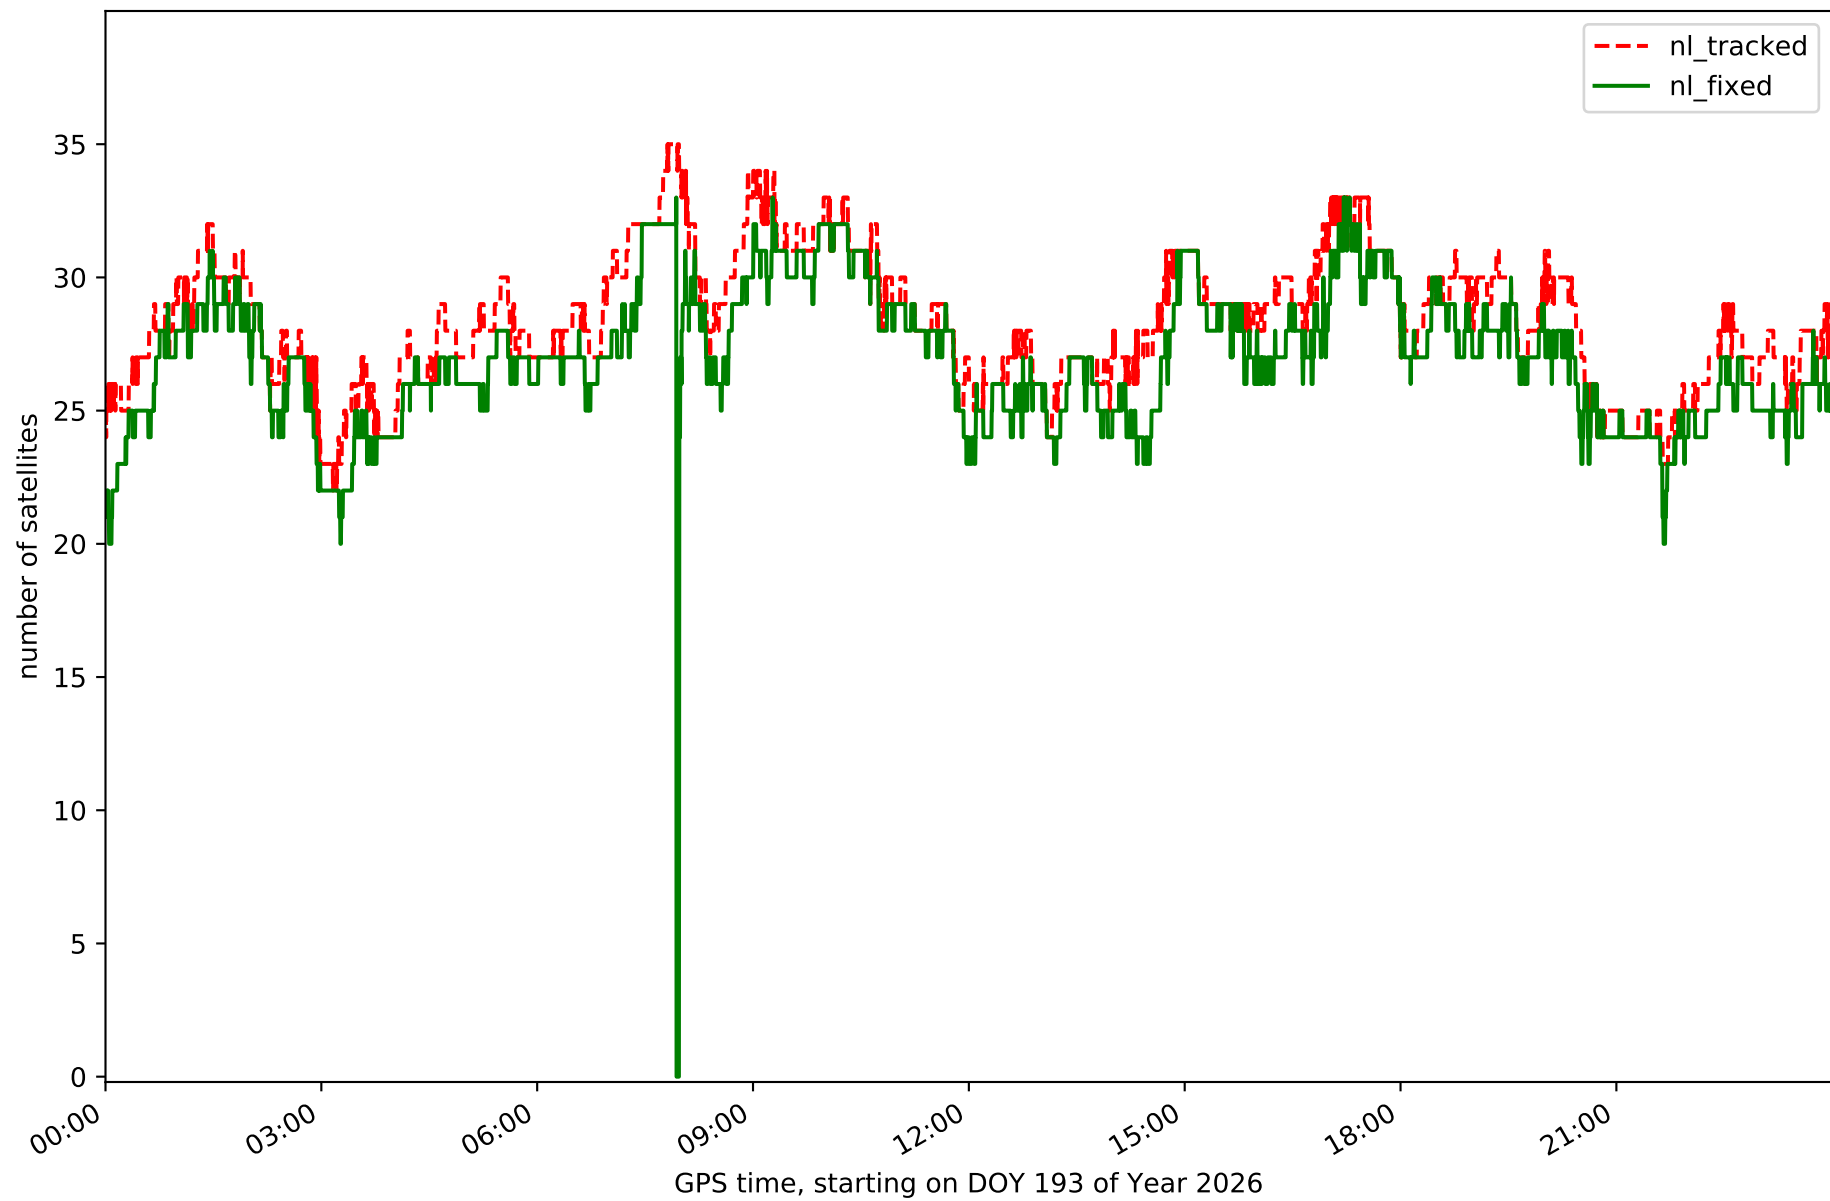


Station LRES in network NT32

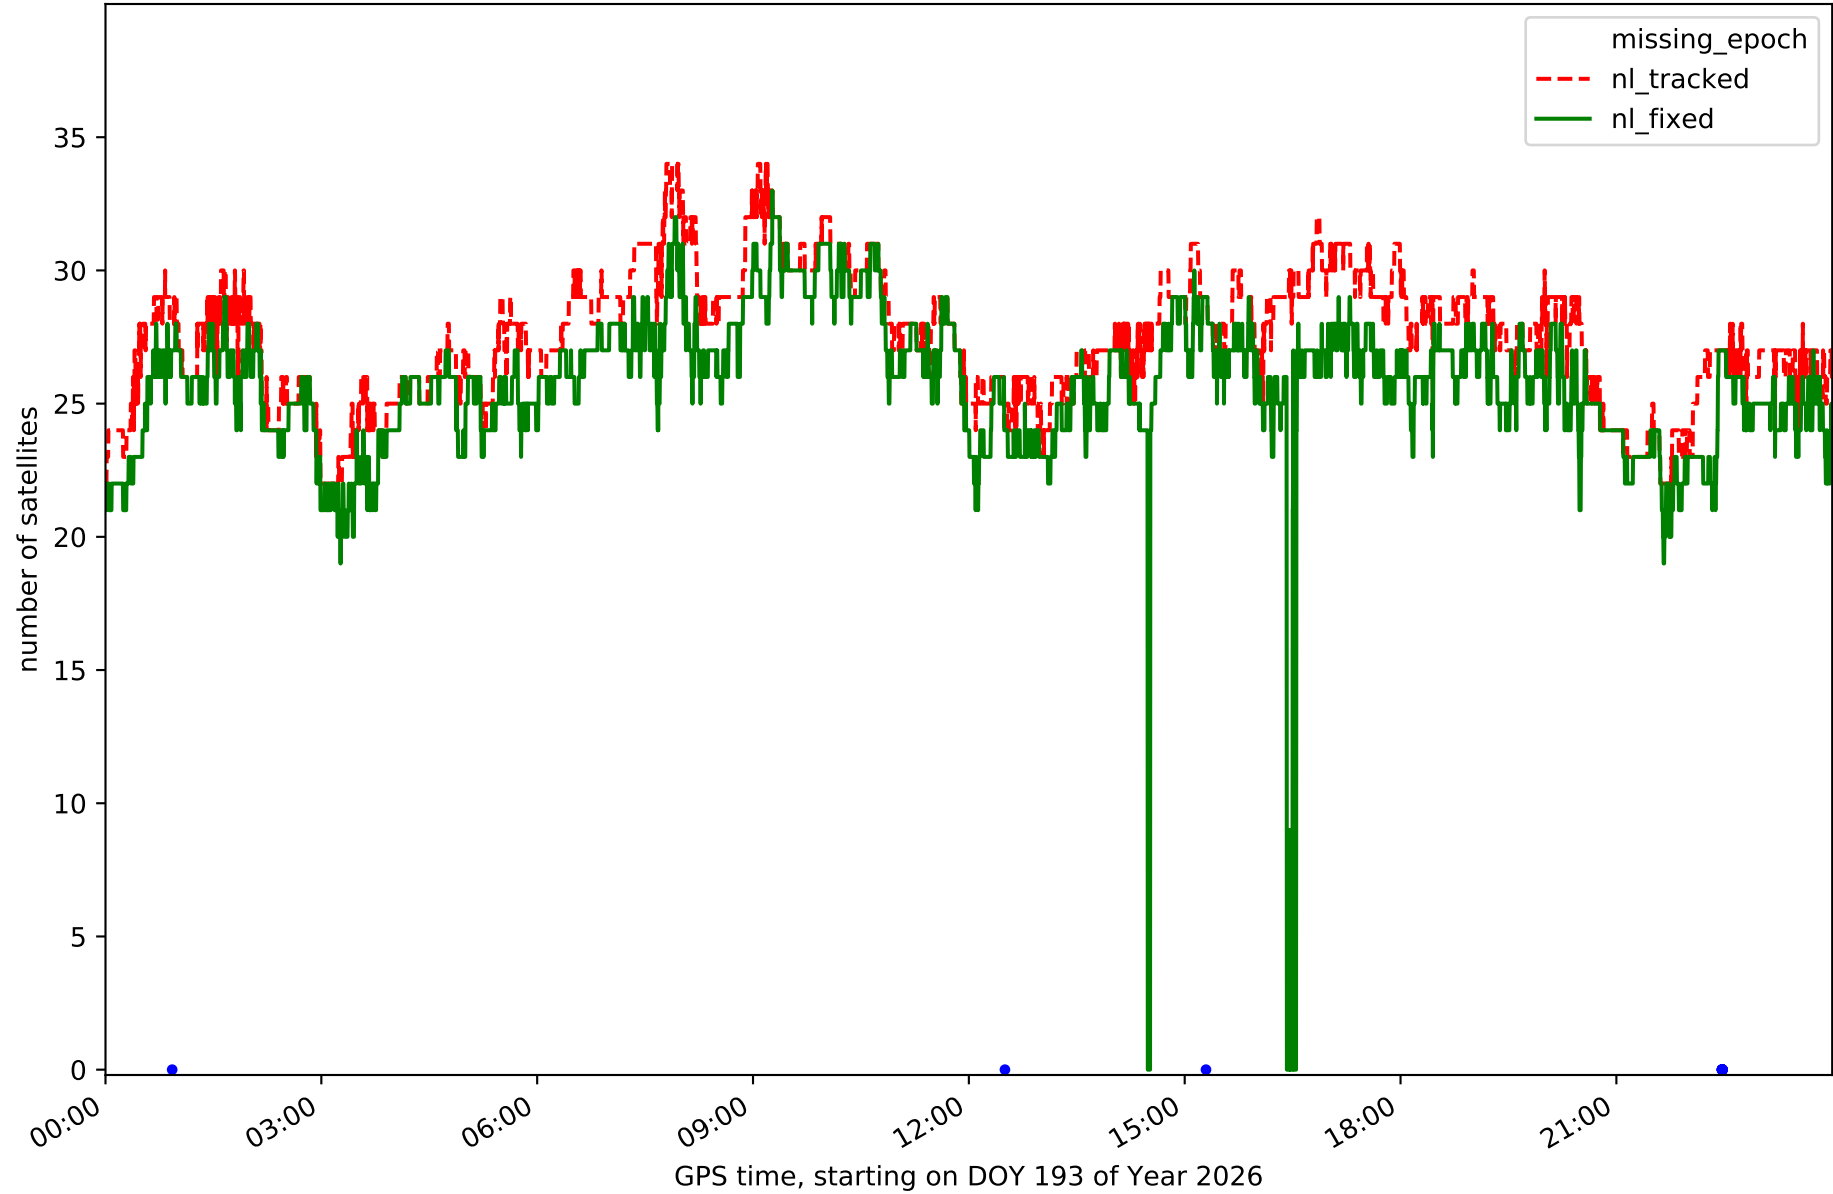


Station TN01 in network NT32

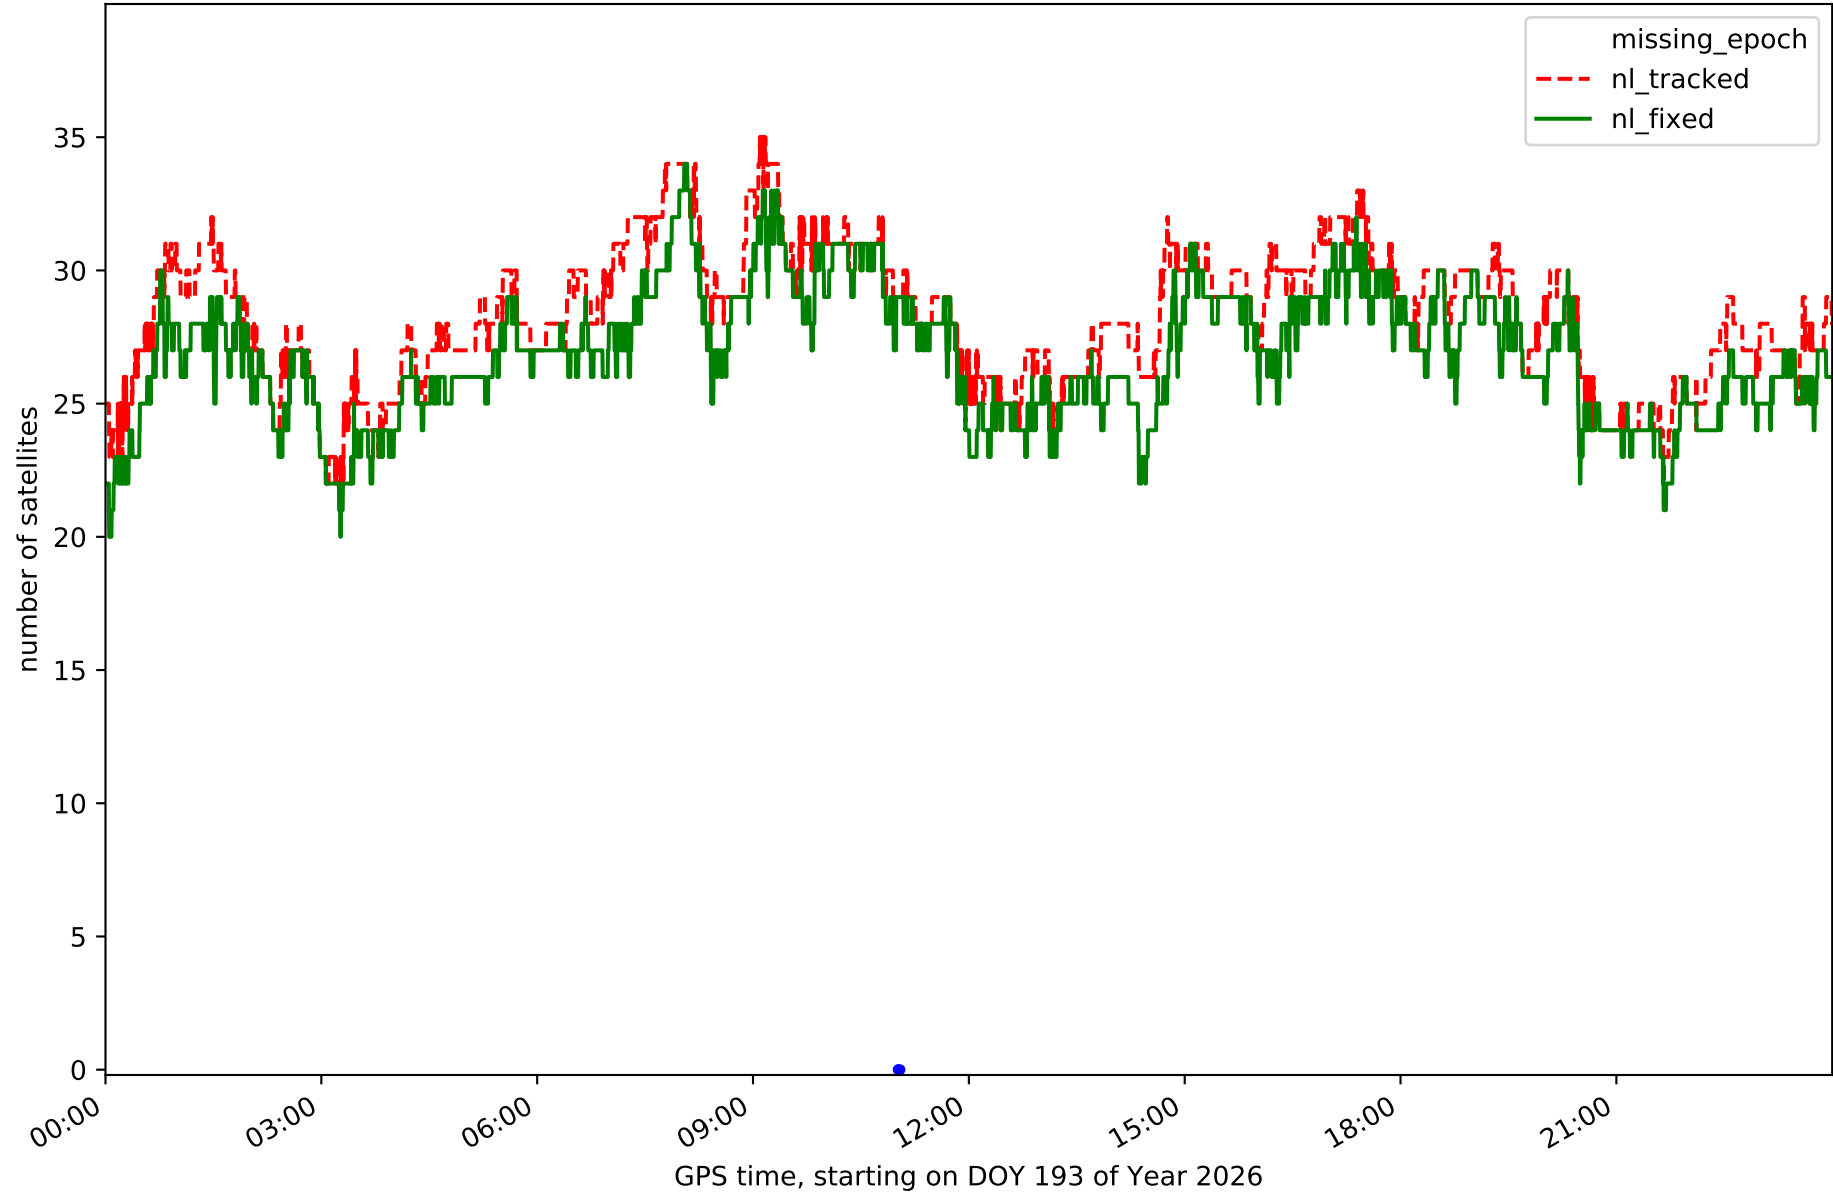


Station TN02 in network NT32

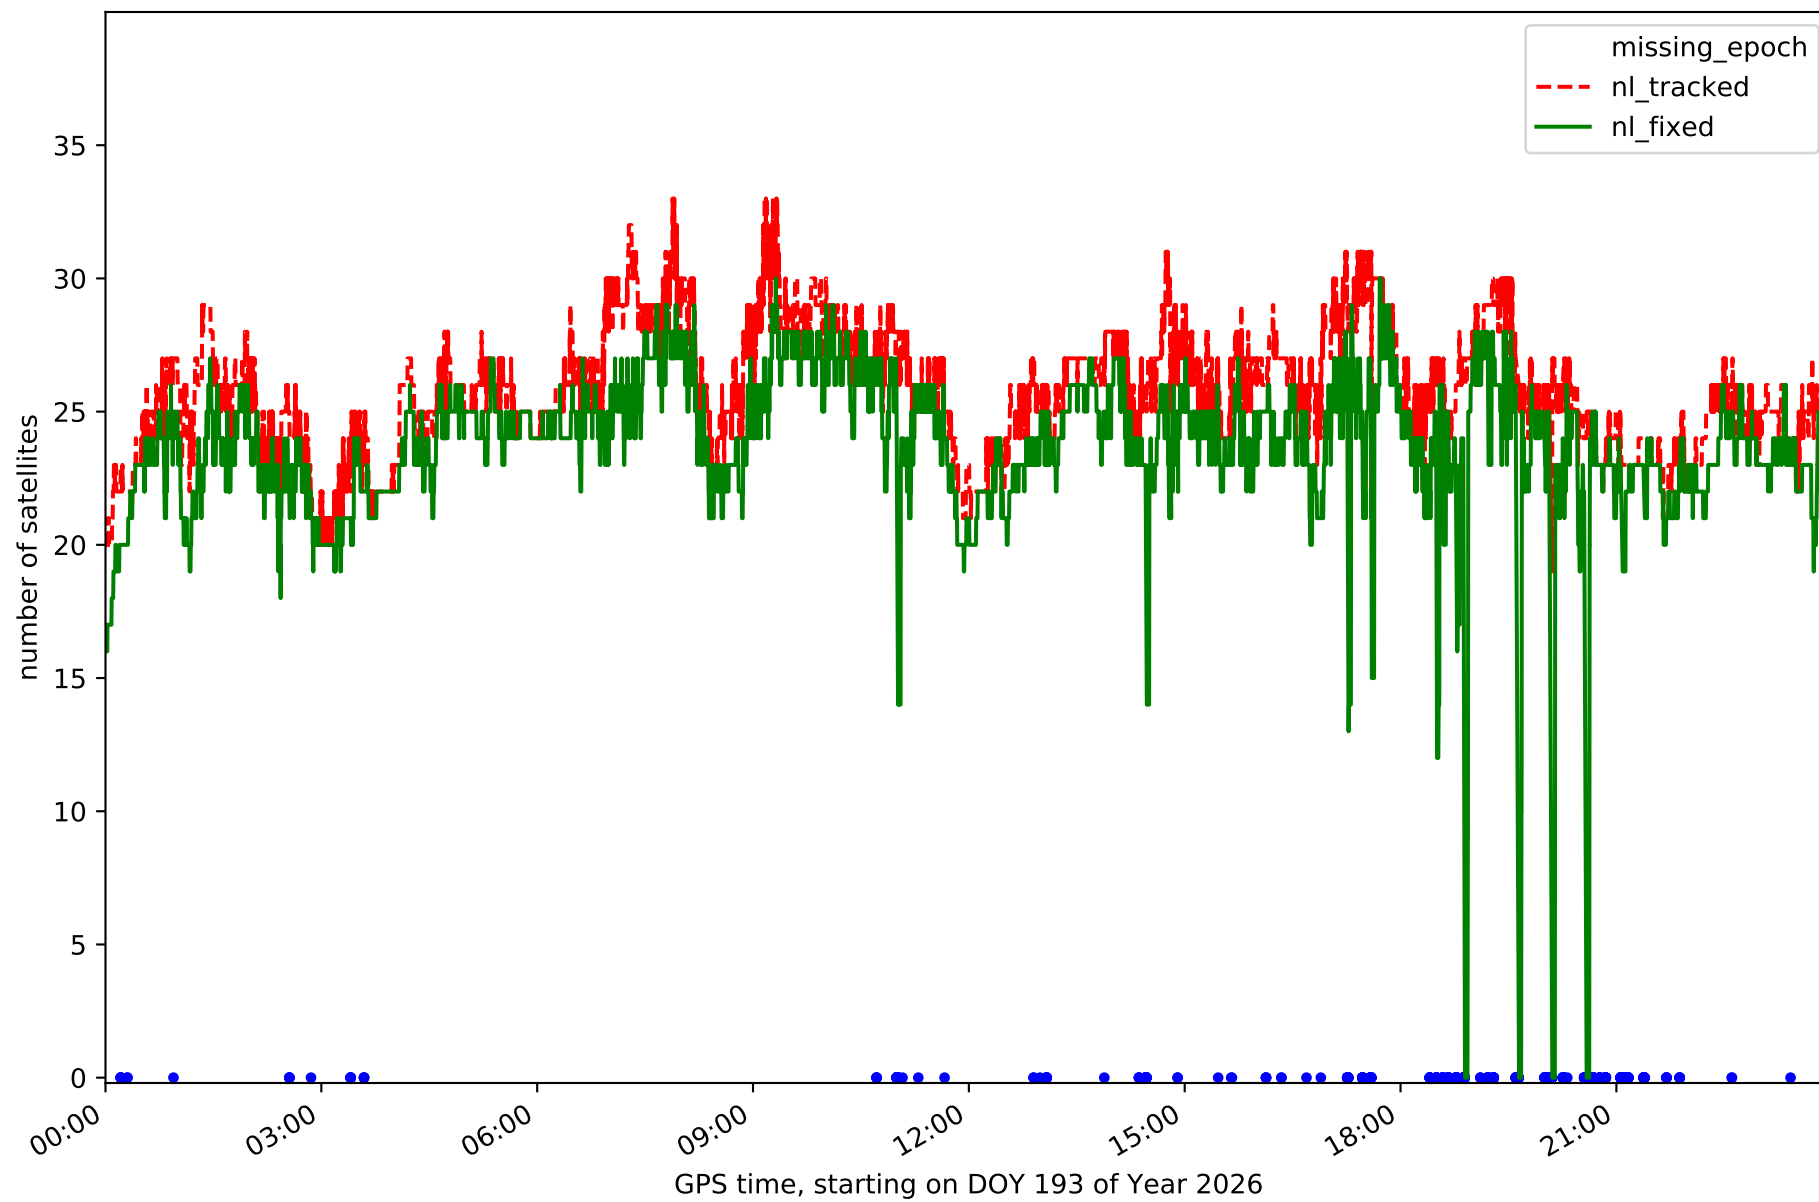


Station TN03 in network NT32

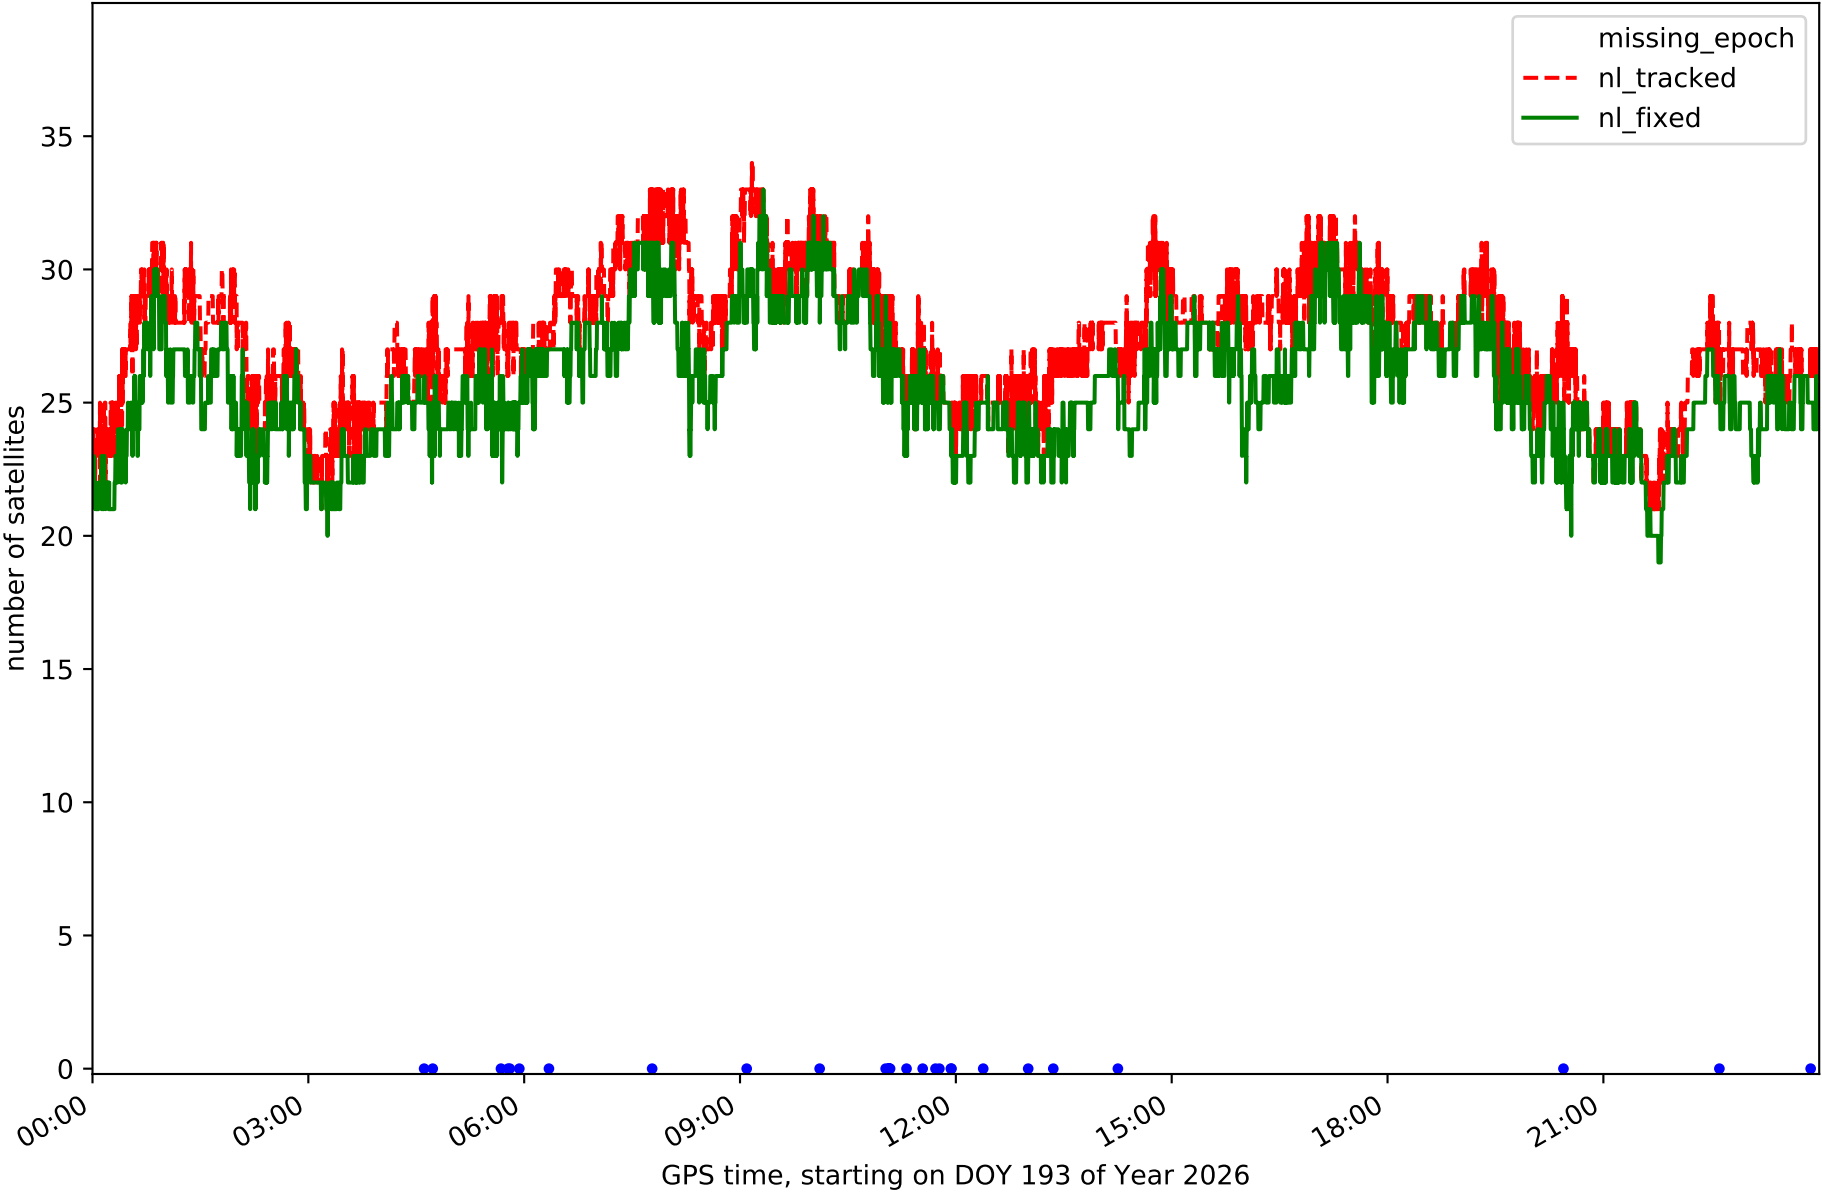


Station TN06 in network NT32

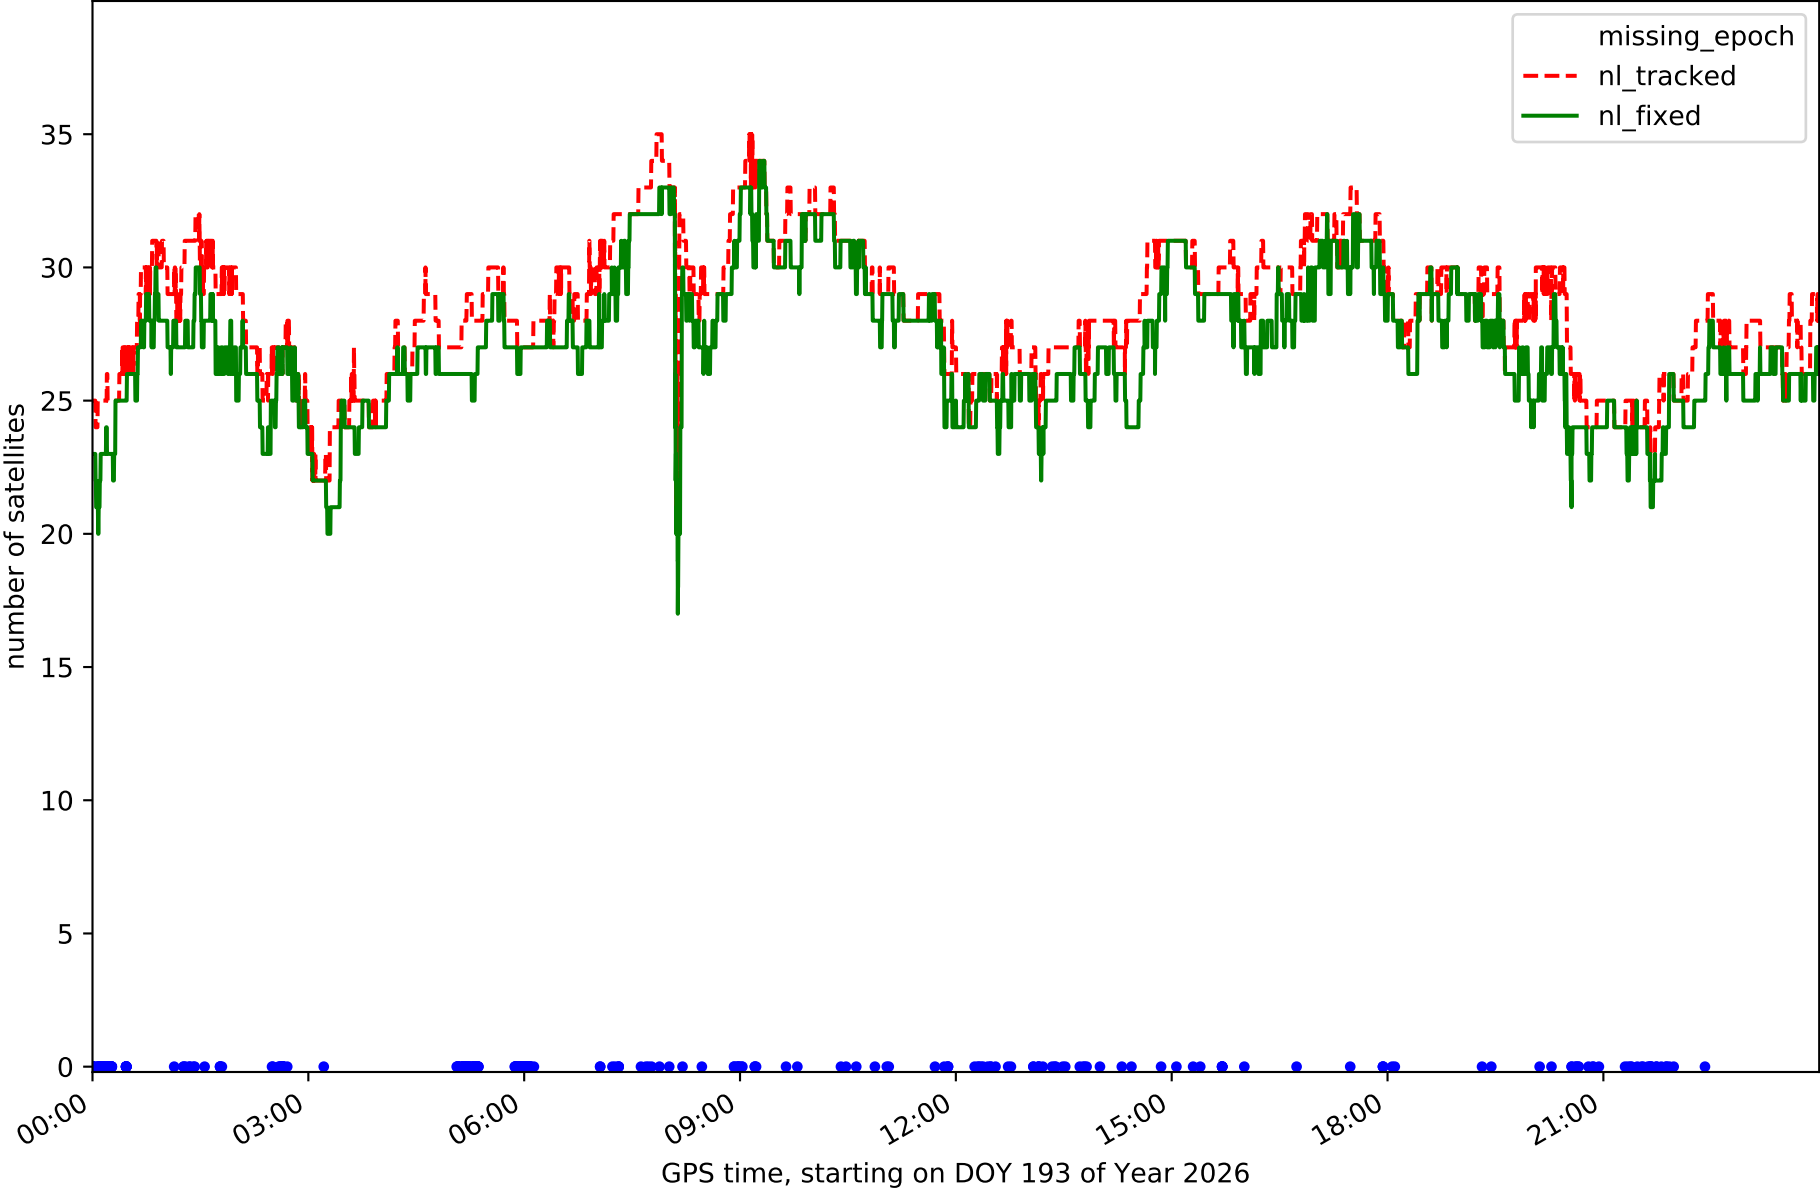


Station TN09 in network NT32

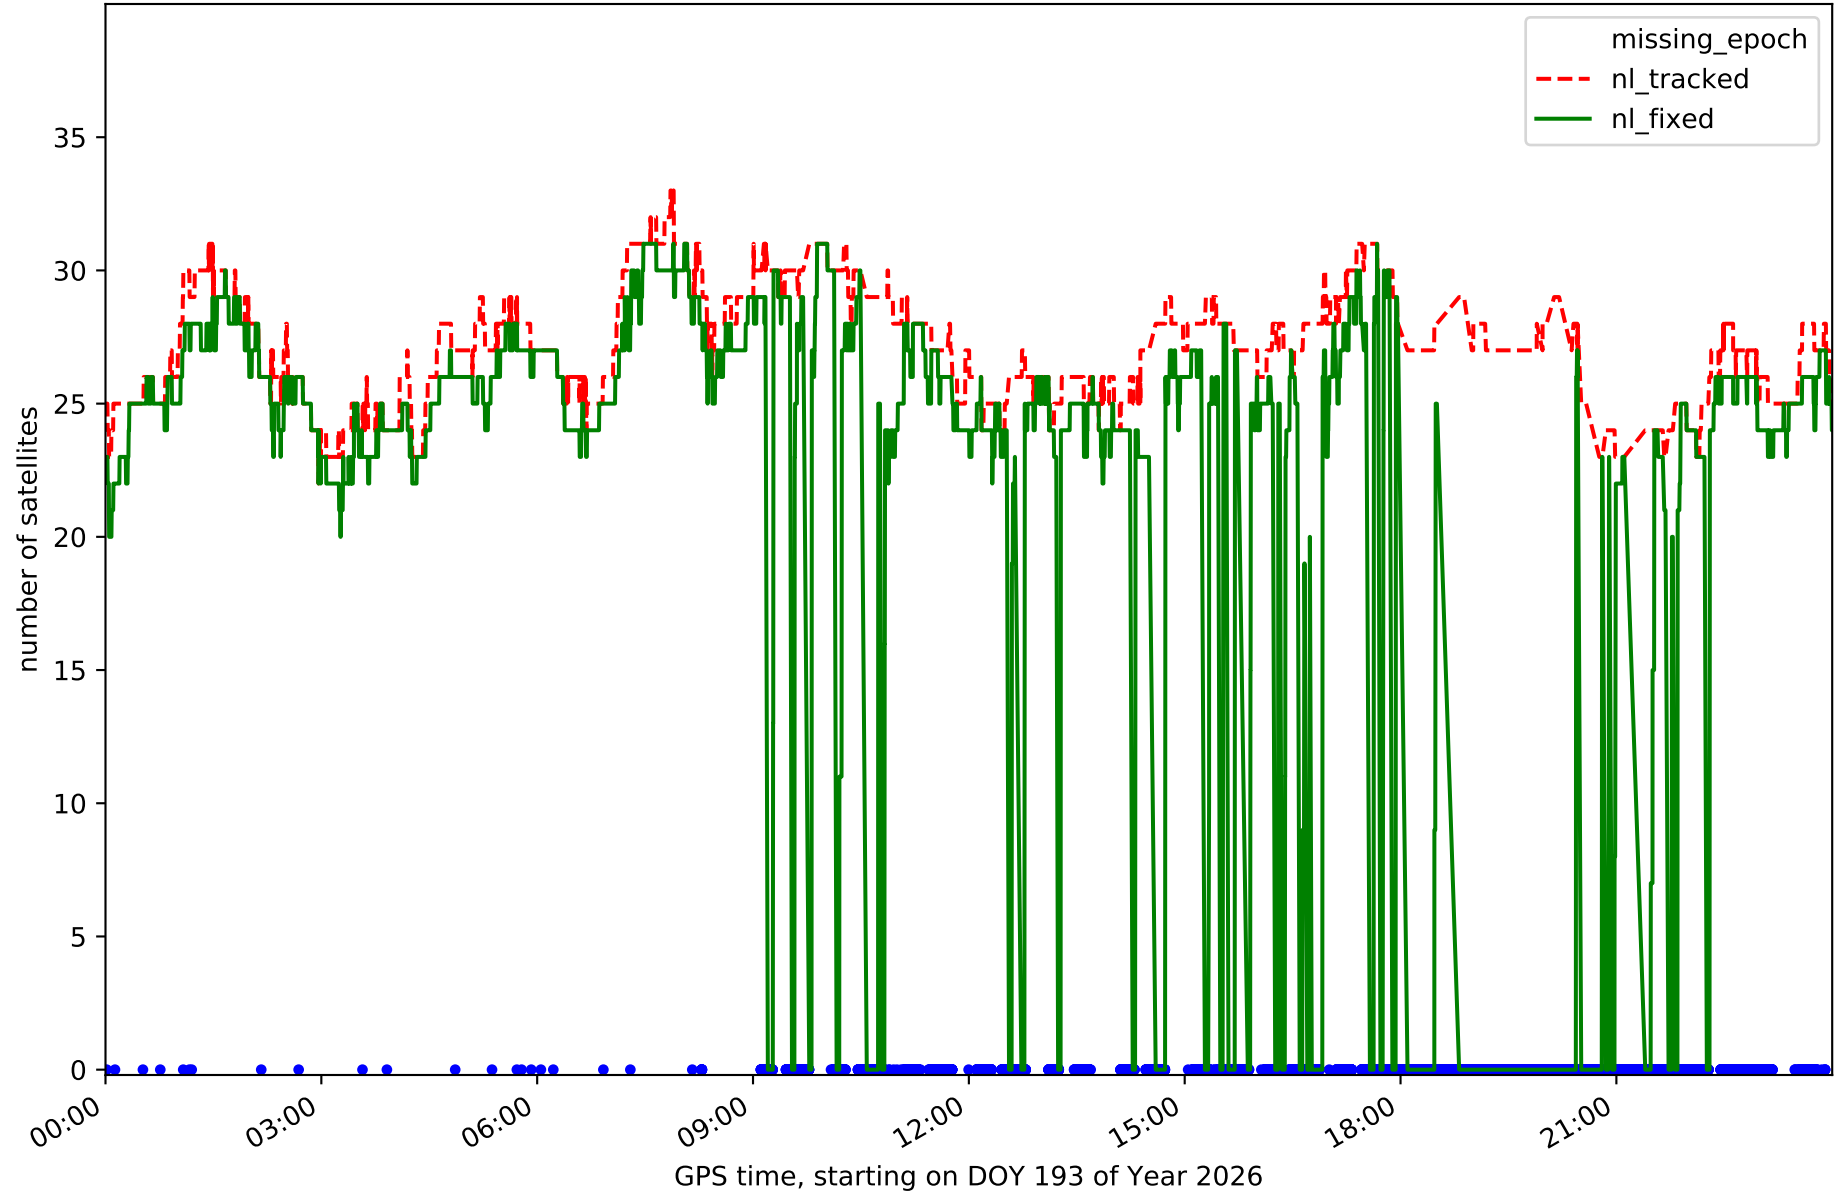


Station TE11 in network NT32

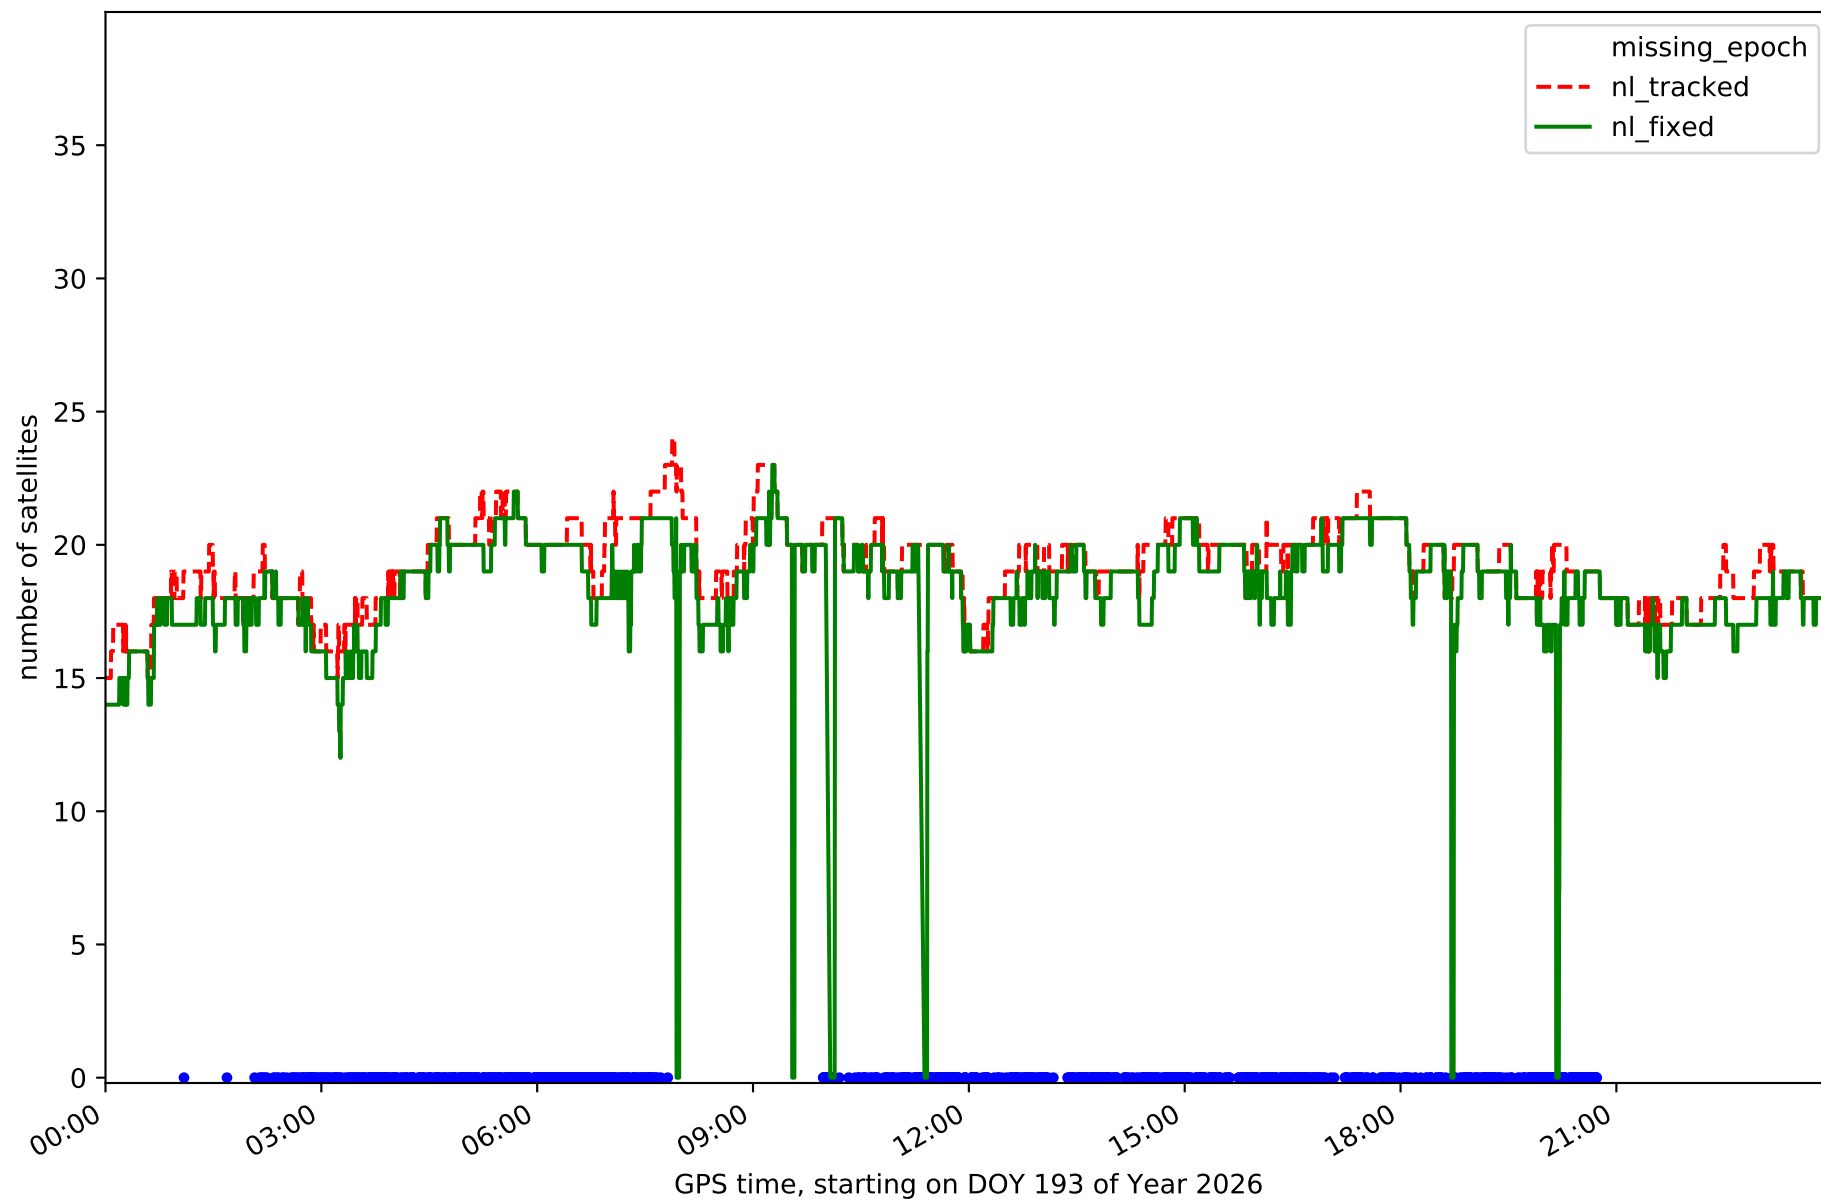


RefCheck for station EH01 in network NT32

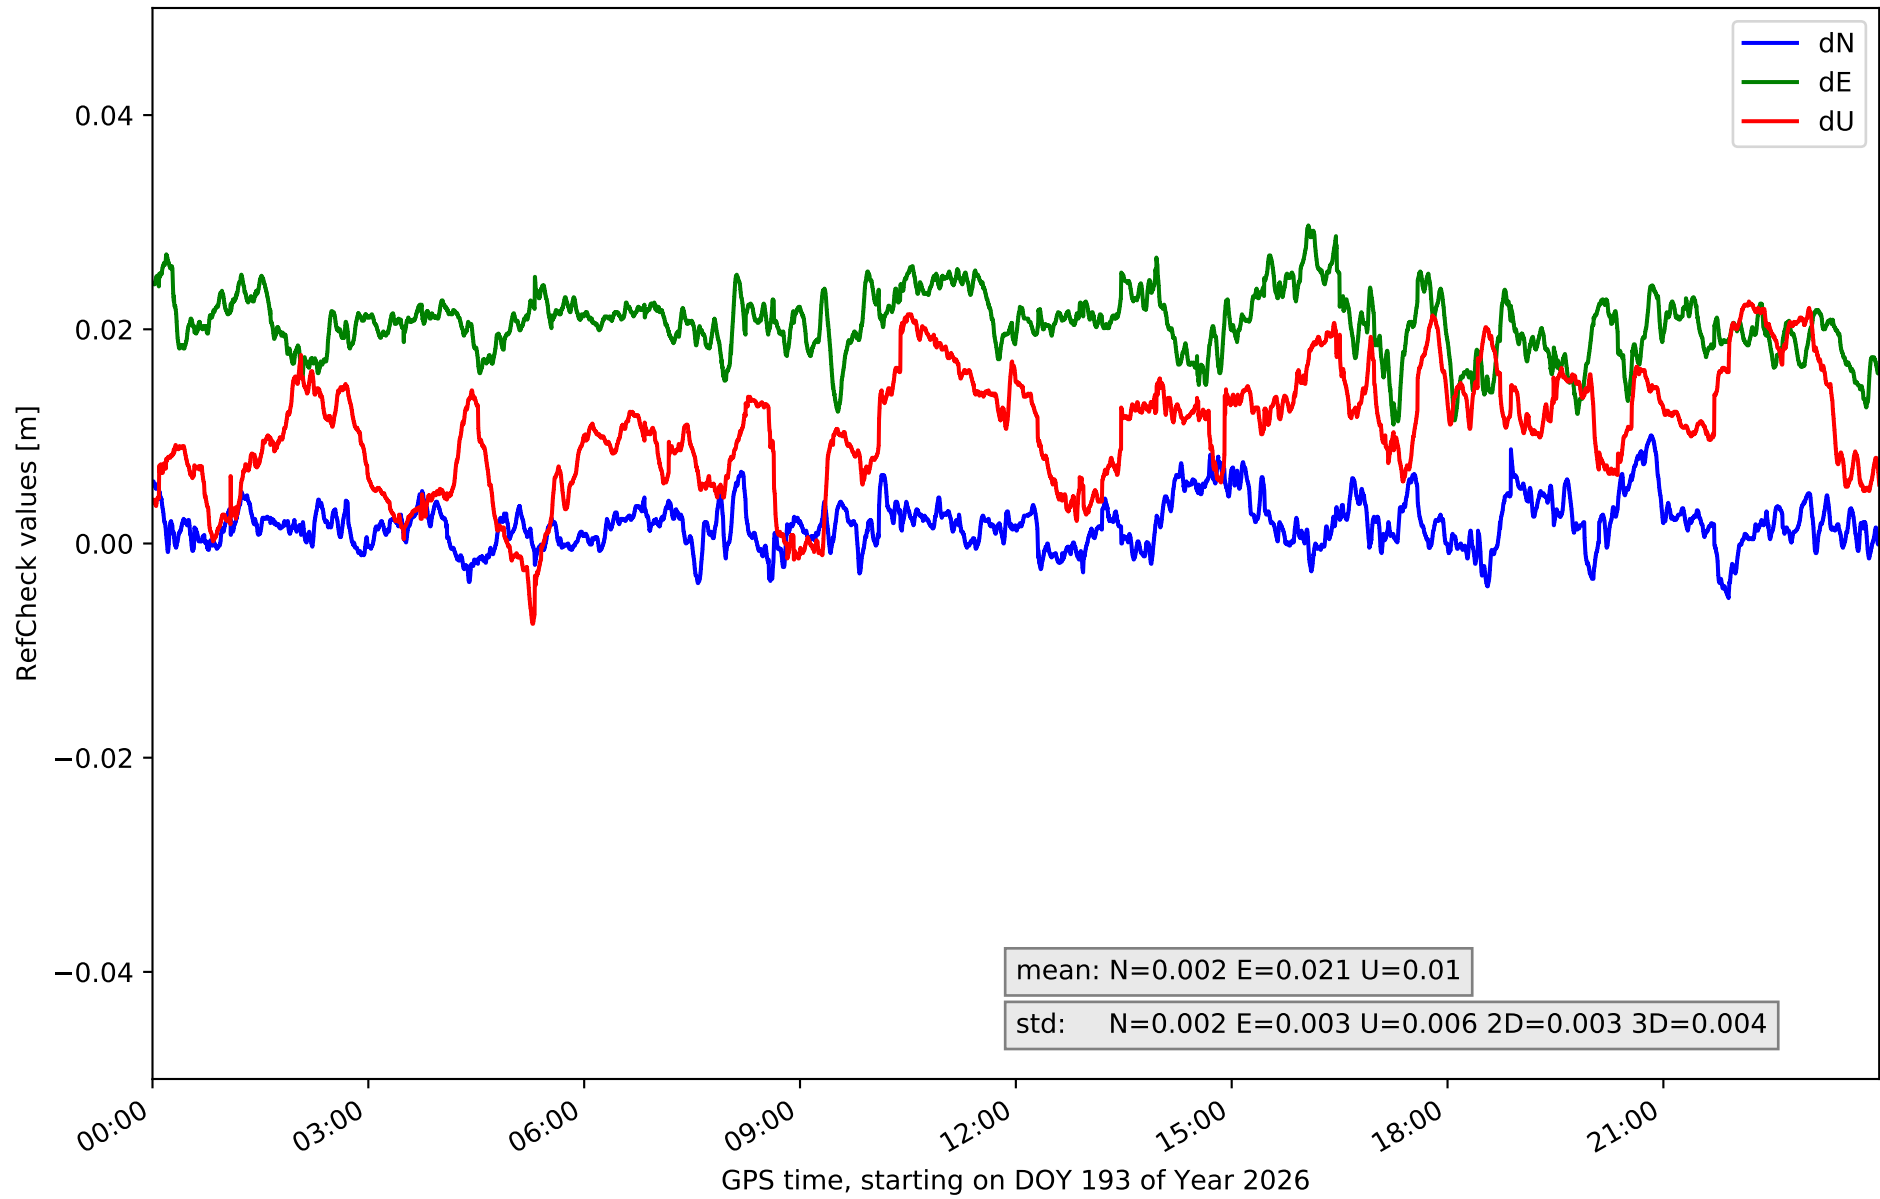


RefCheck for station EH02 in network NT32

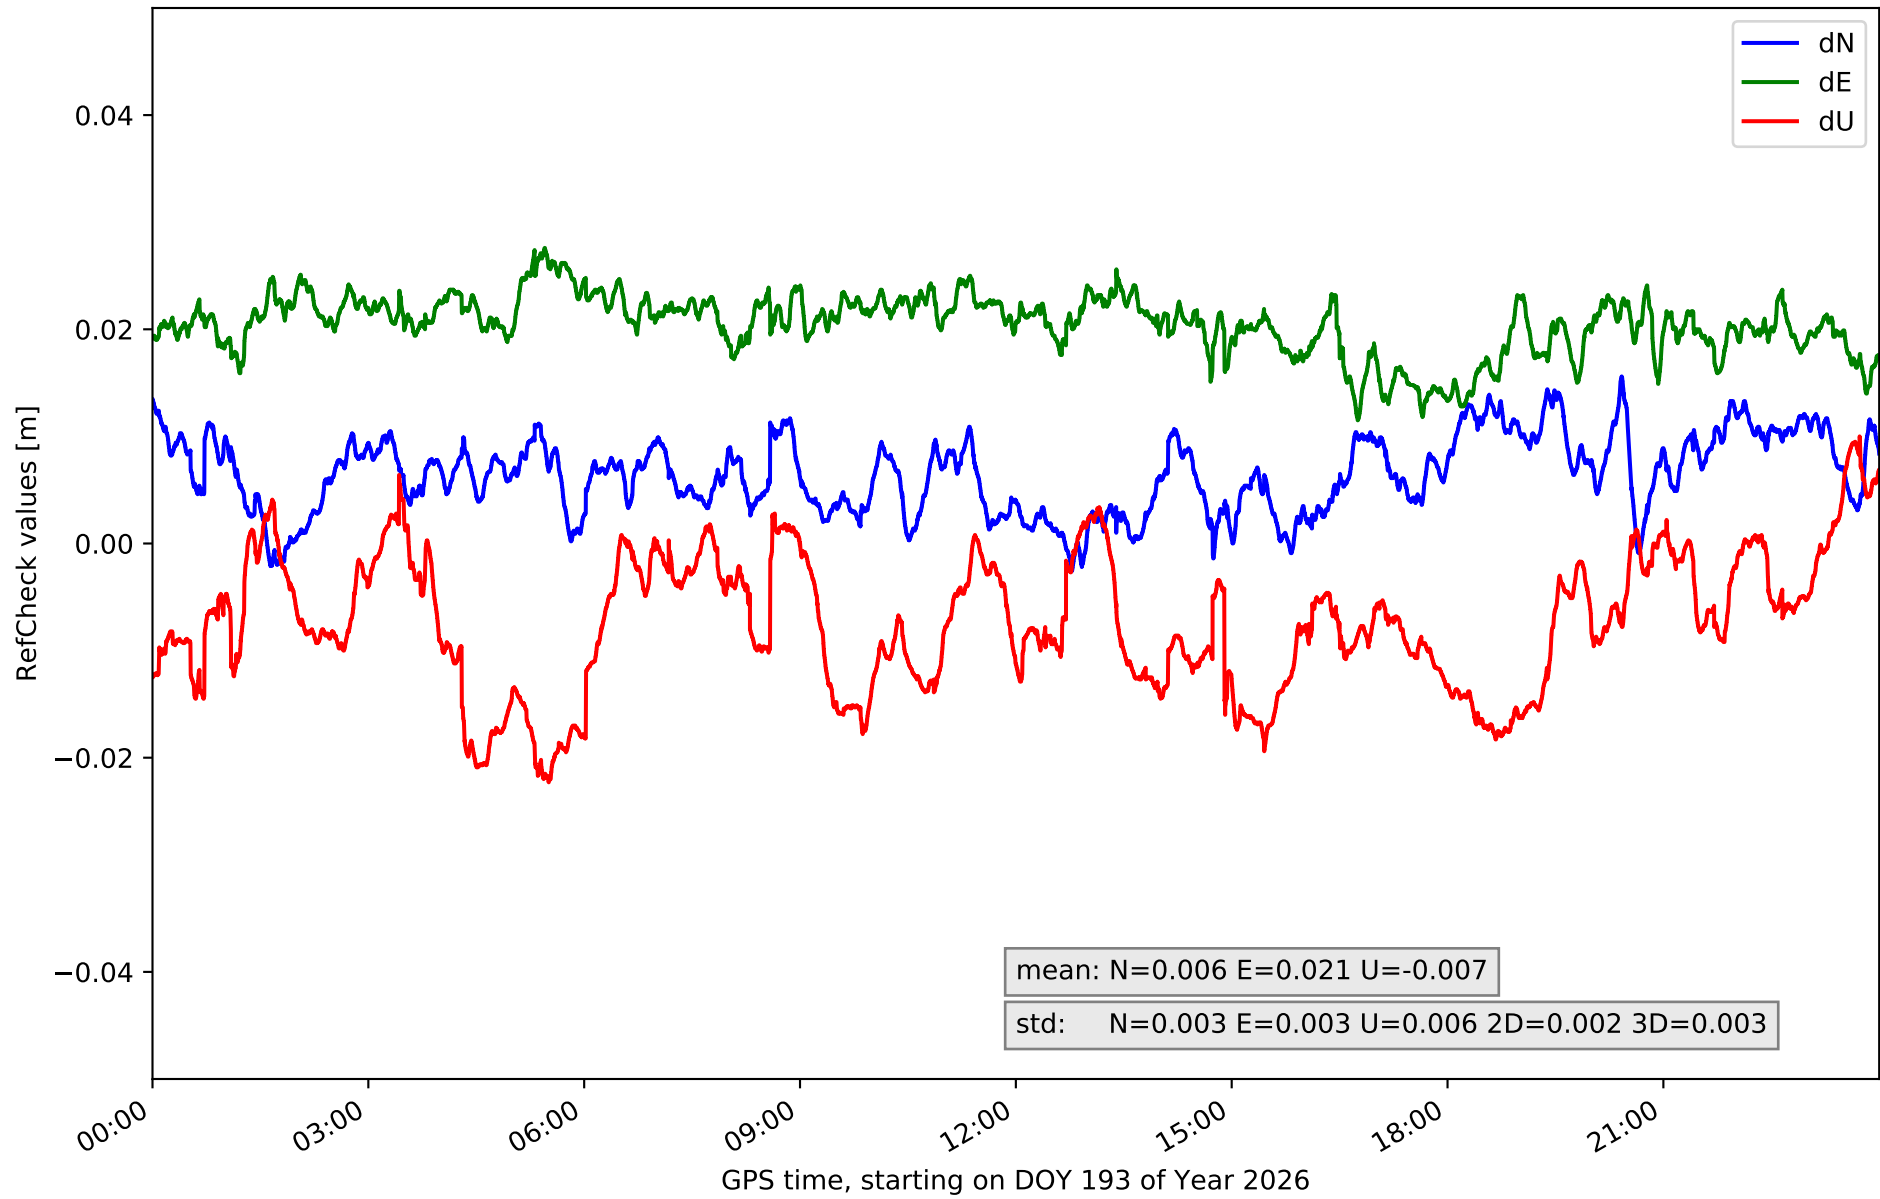


RefCheck for station GOM1 in network NT32

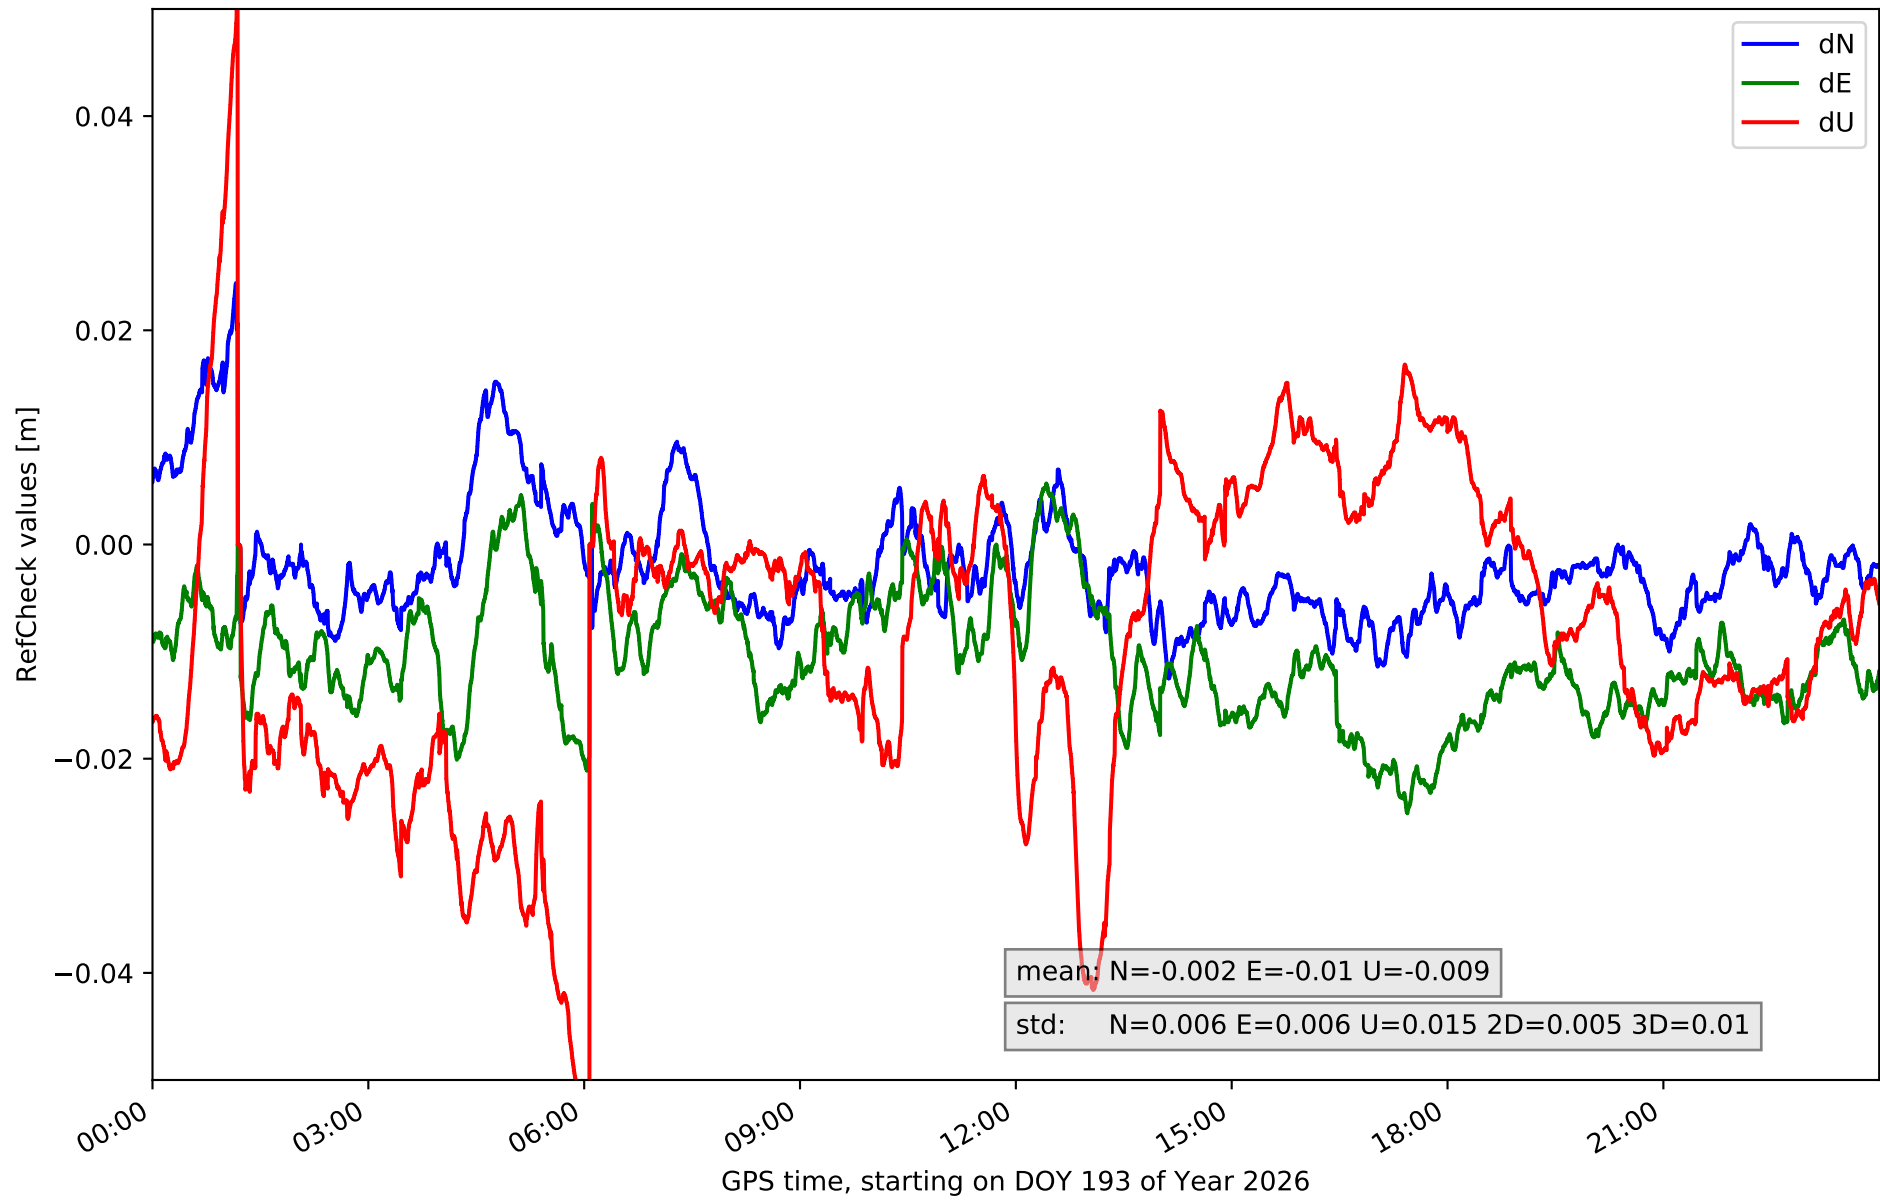


RefCheck for station GOME in network NT32

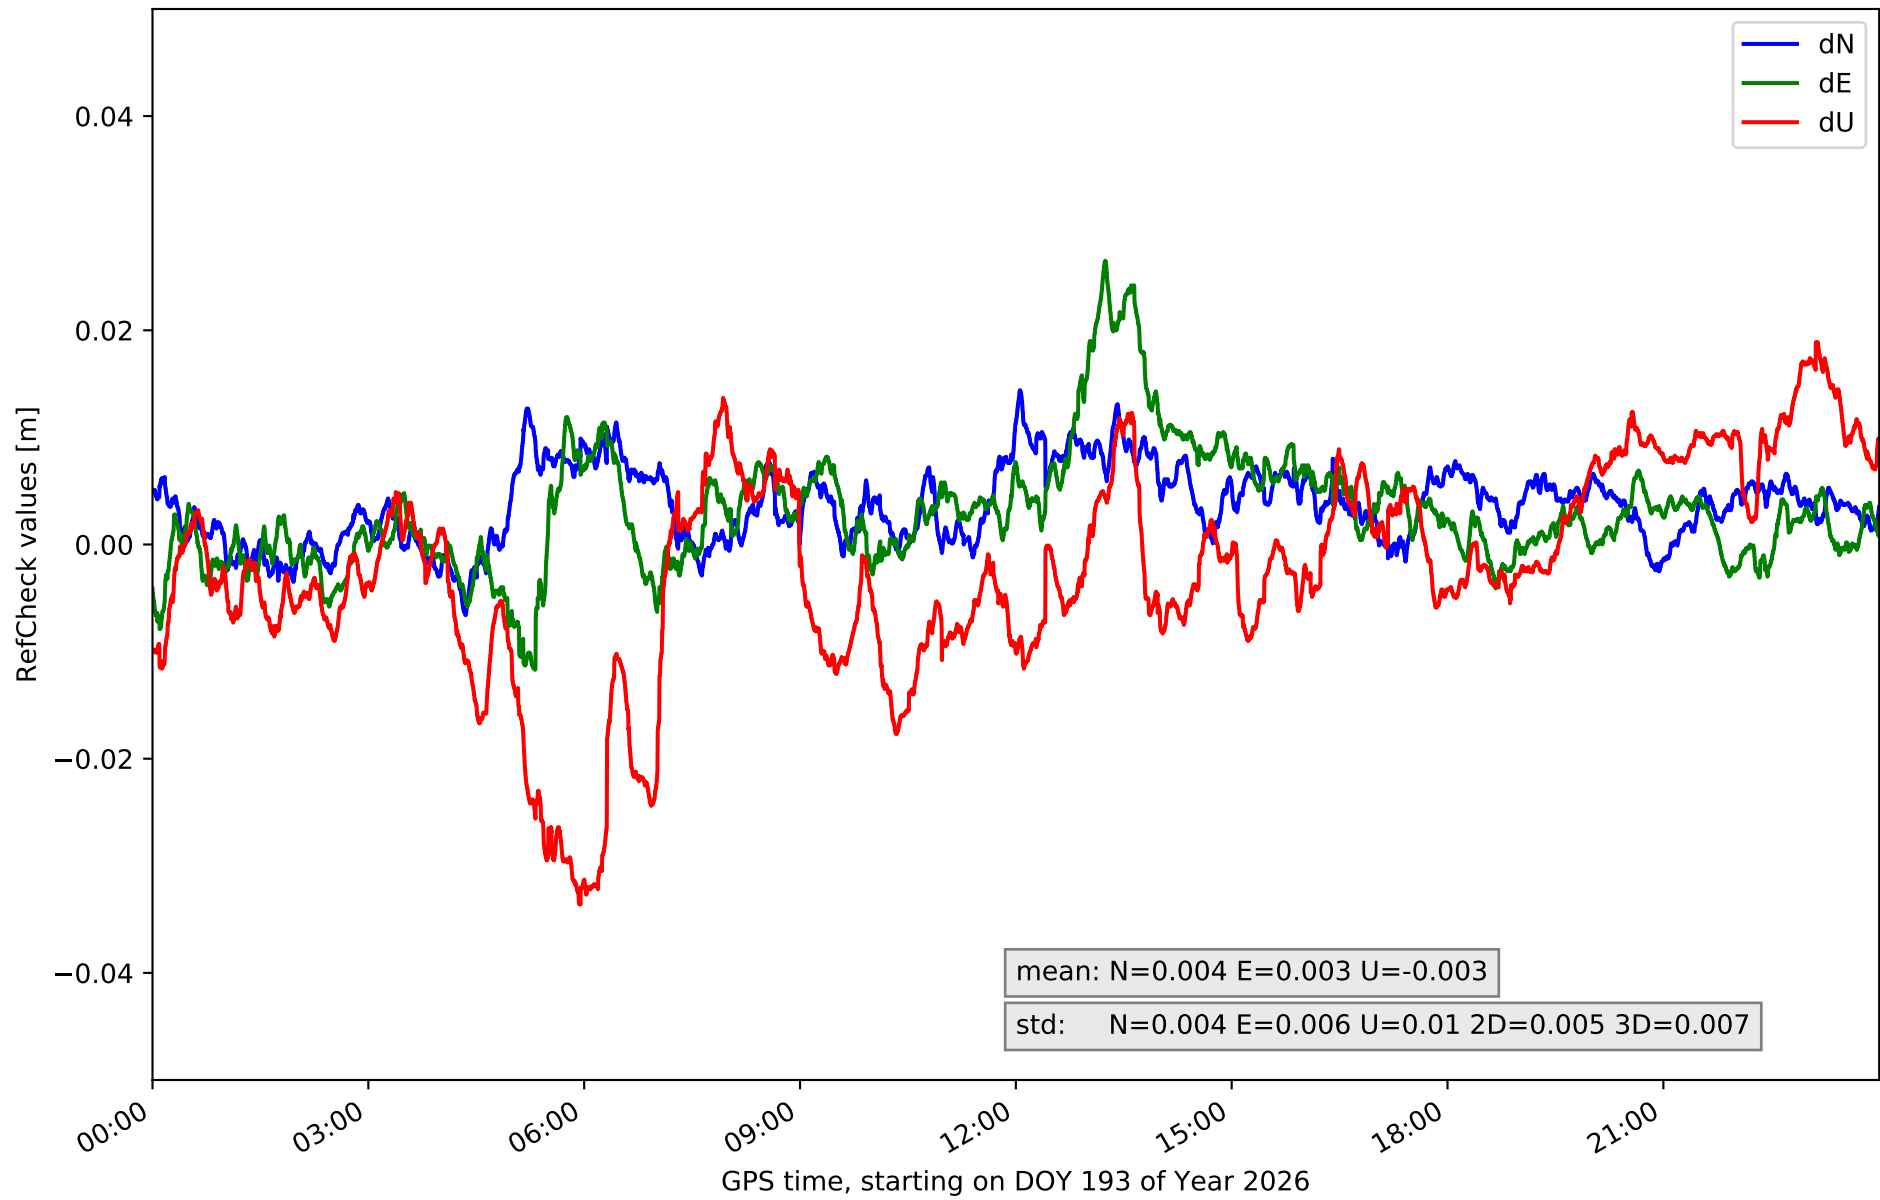


RefCheck for station IZAN in network NT32

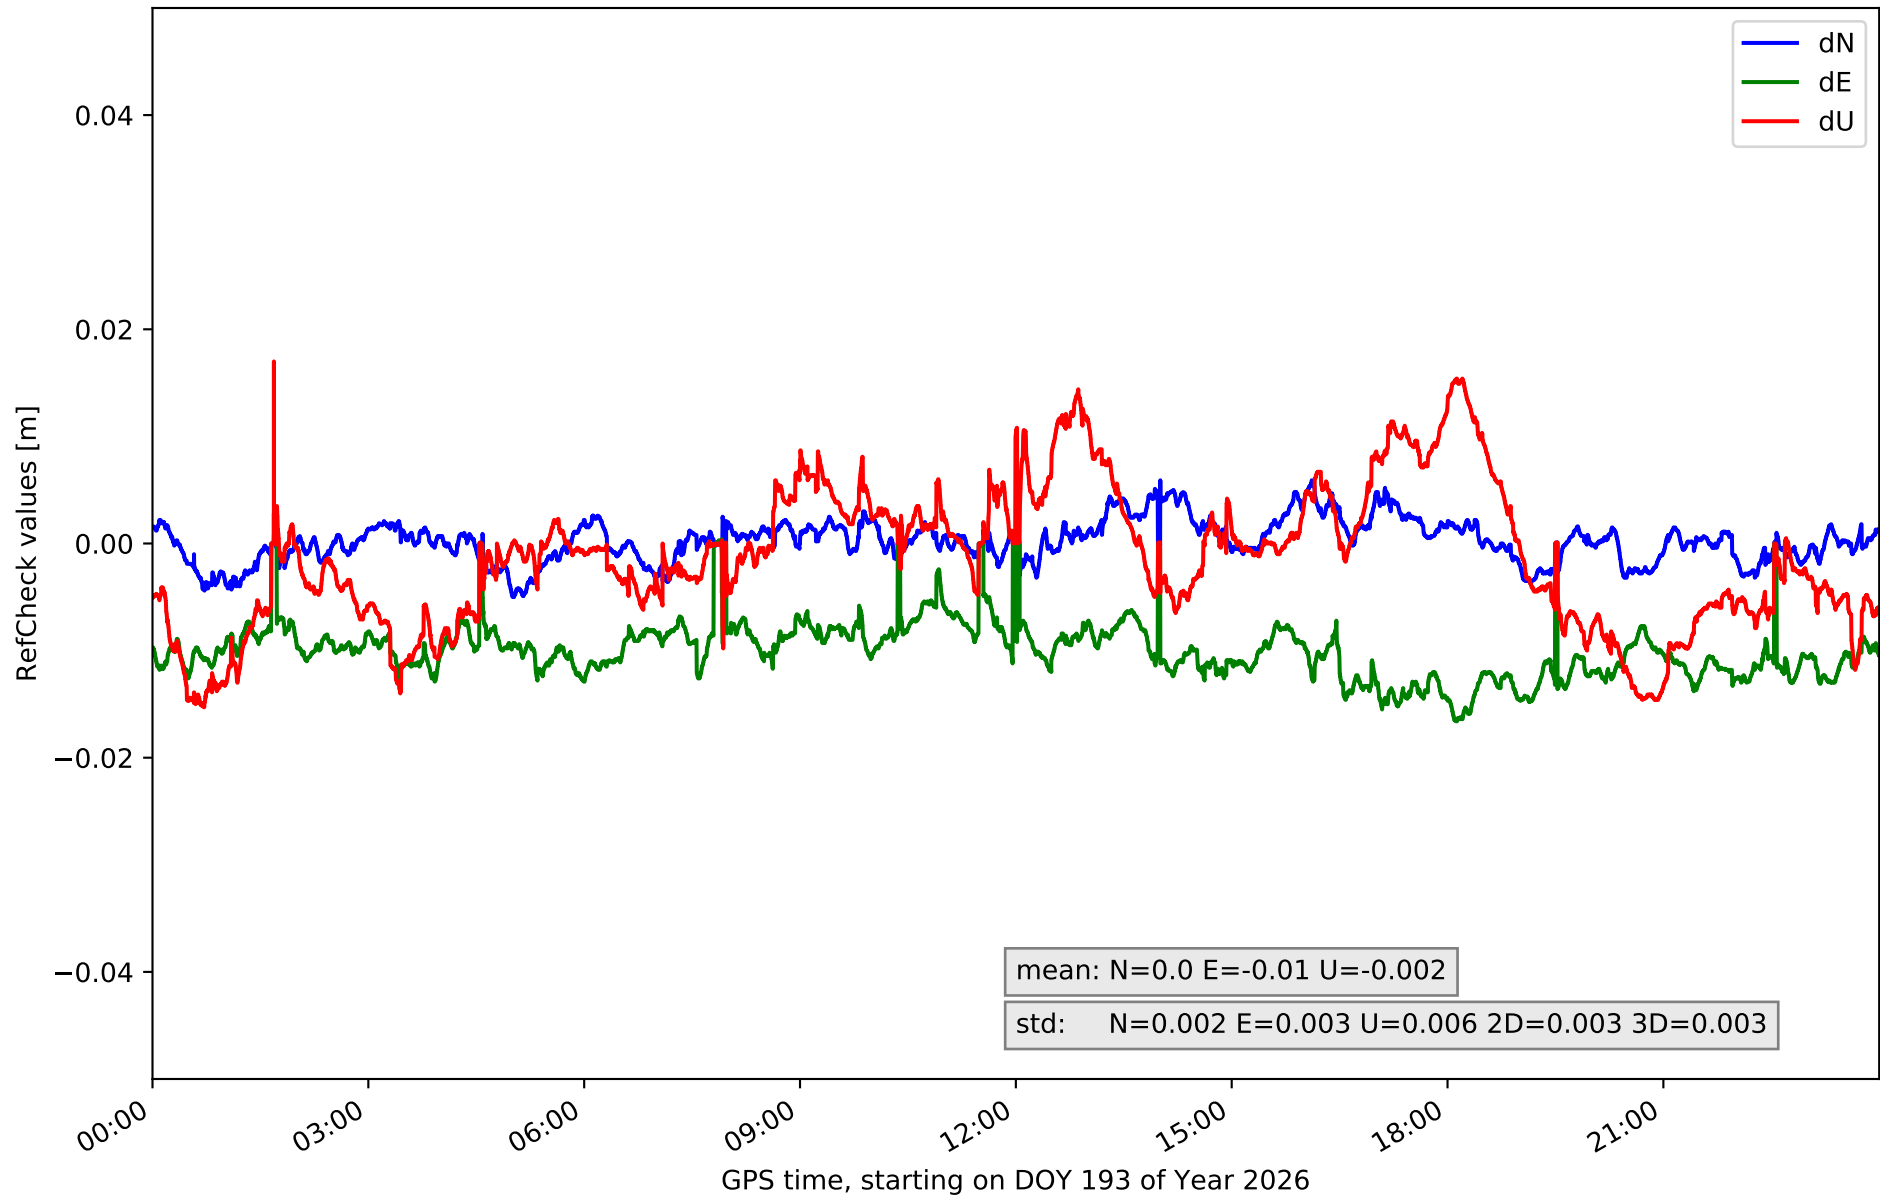


RefCheck for station LP01 in network NT32

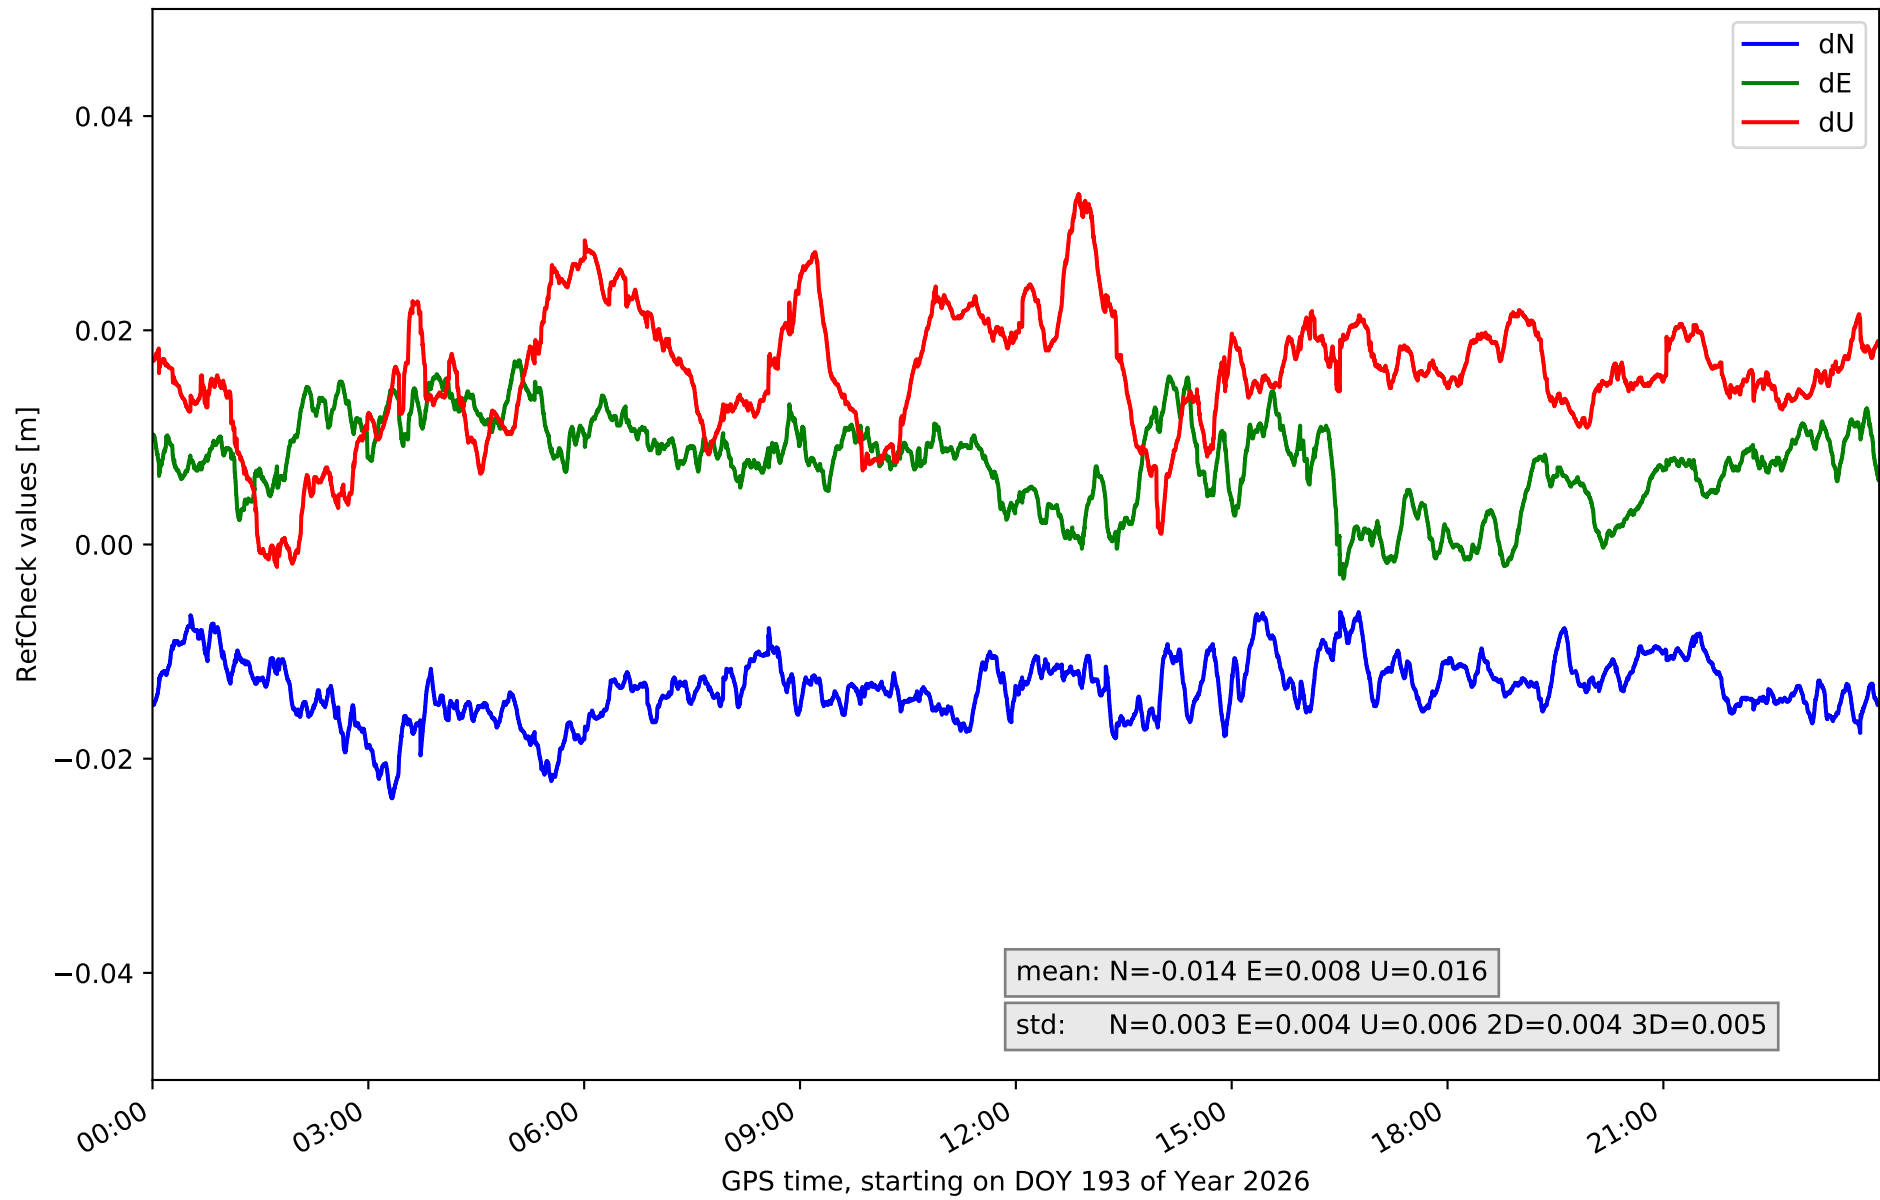


RefCheck for station LP03 in network NT32

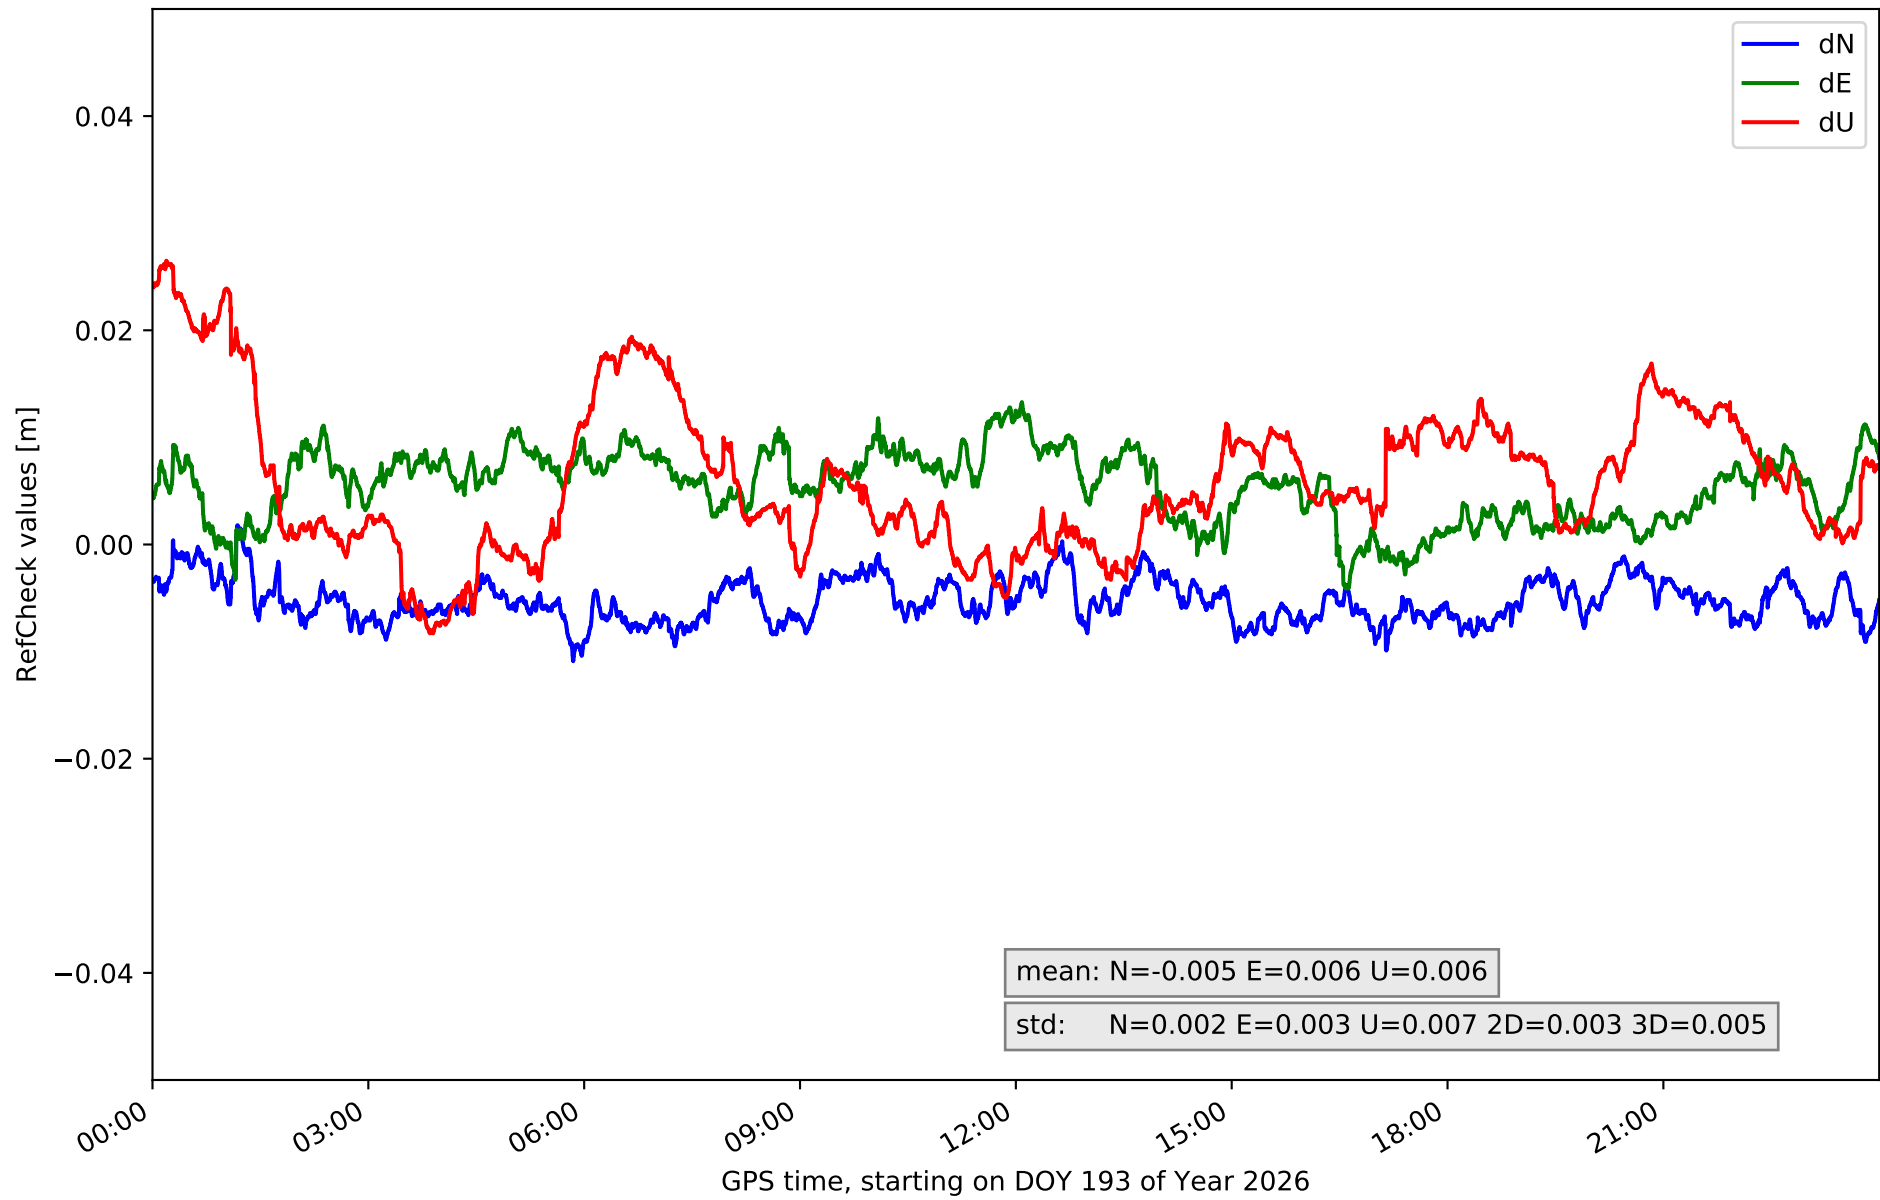


RefCheck for station LPAL in network NT32

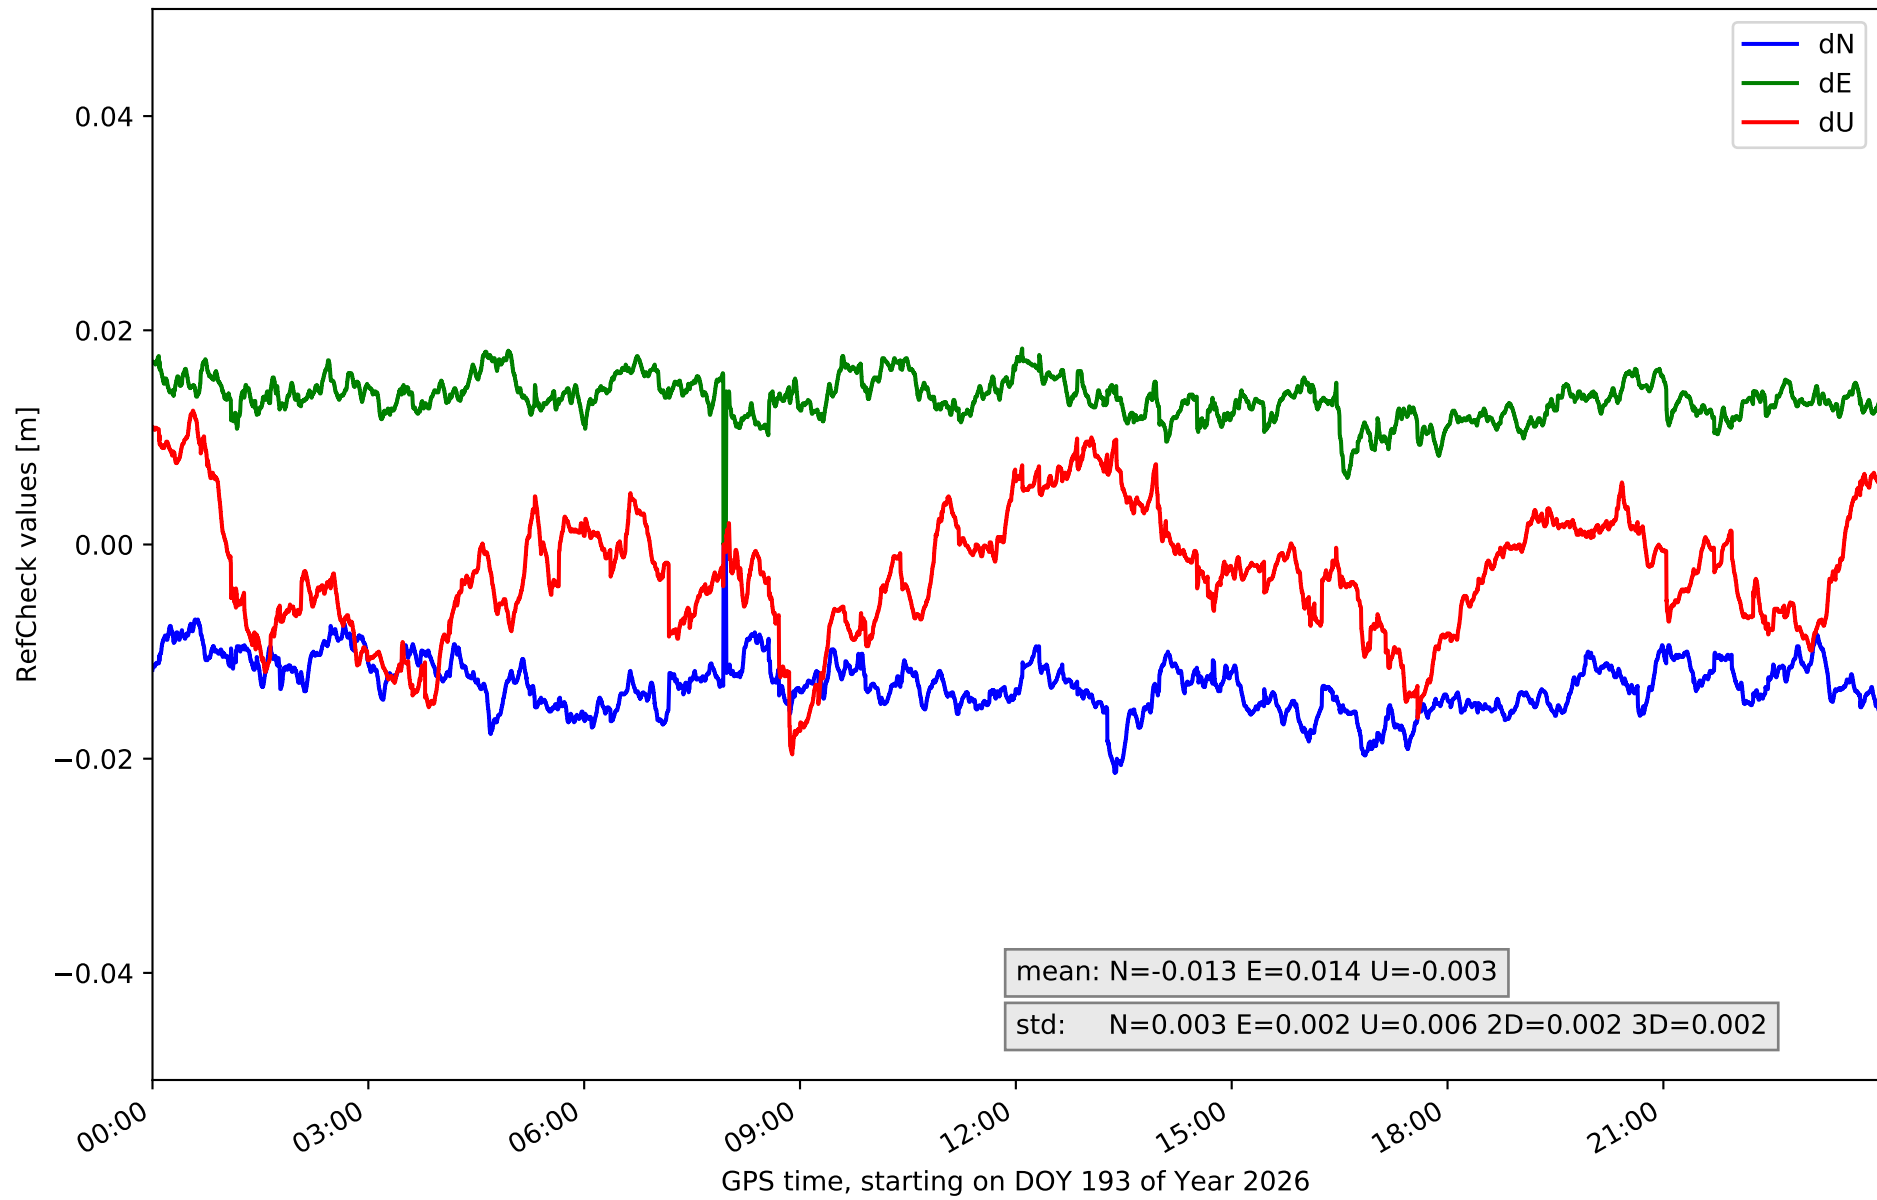


RefCheck for station LRES in network NT32

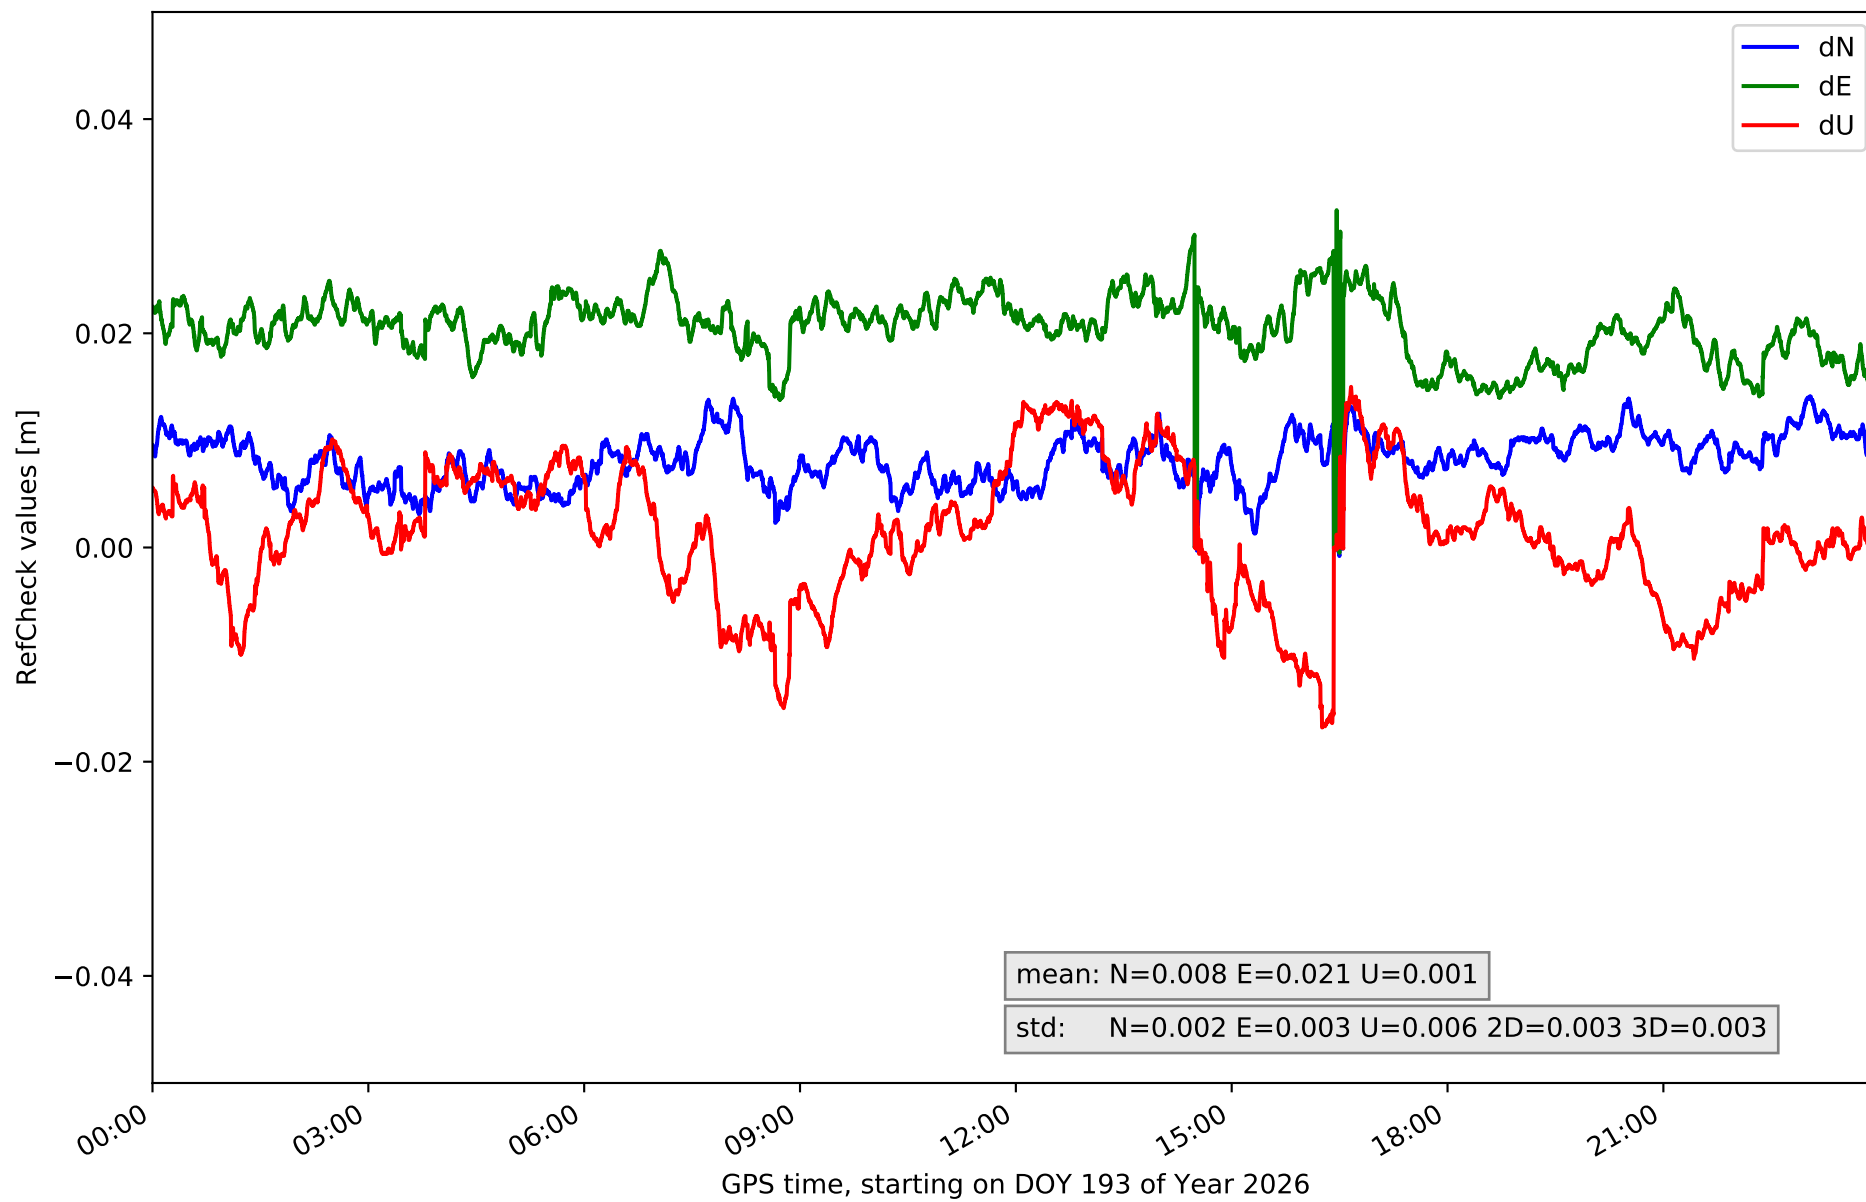


RefCheck for station TN01 in network NT32

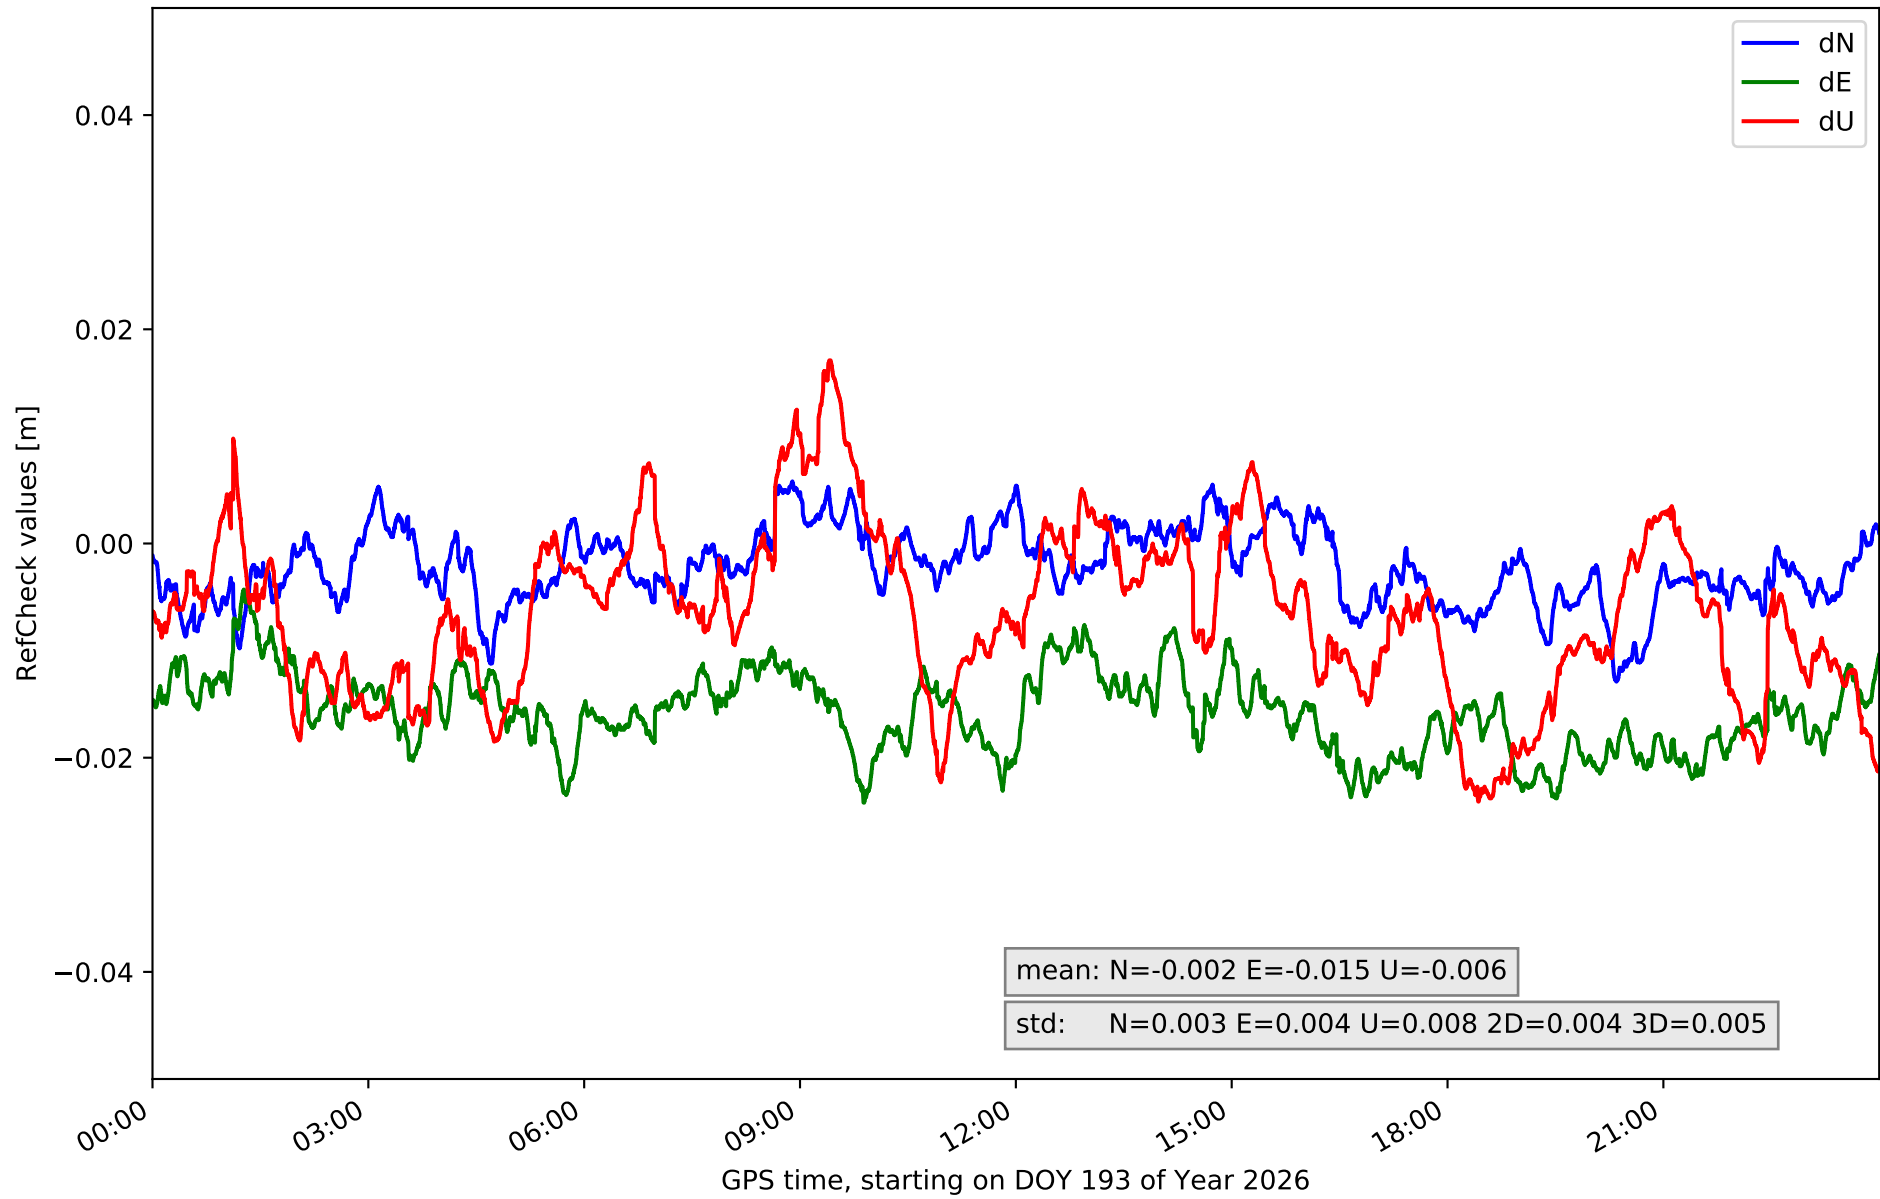


RefCheck for station TN02 in network NT32

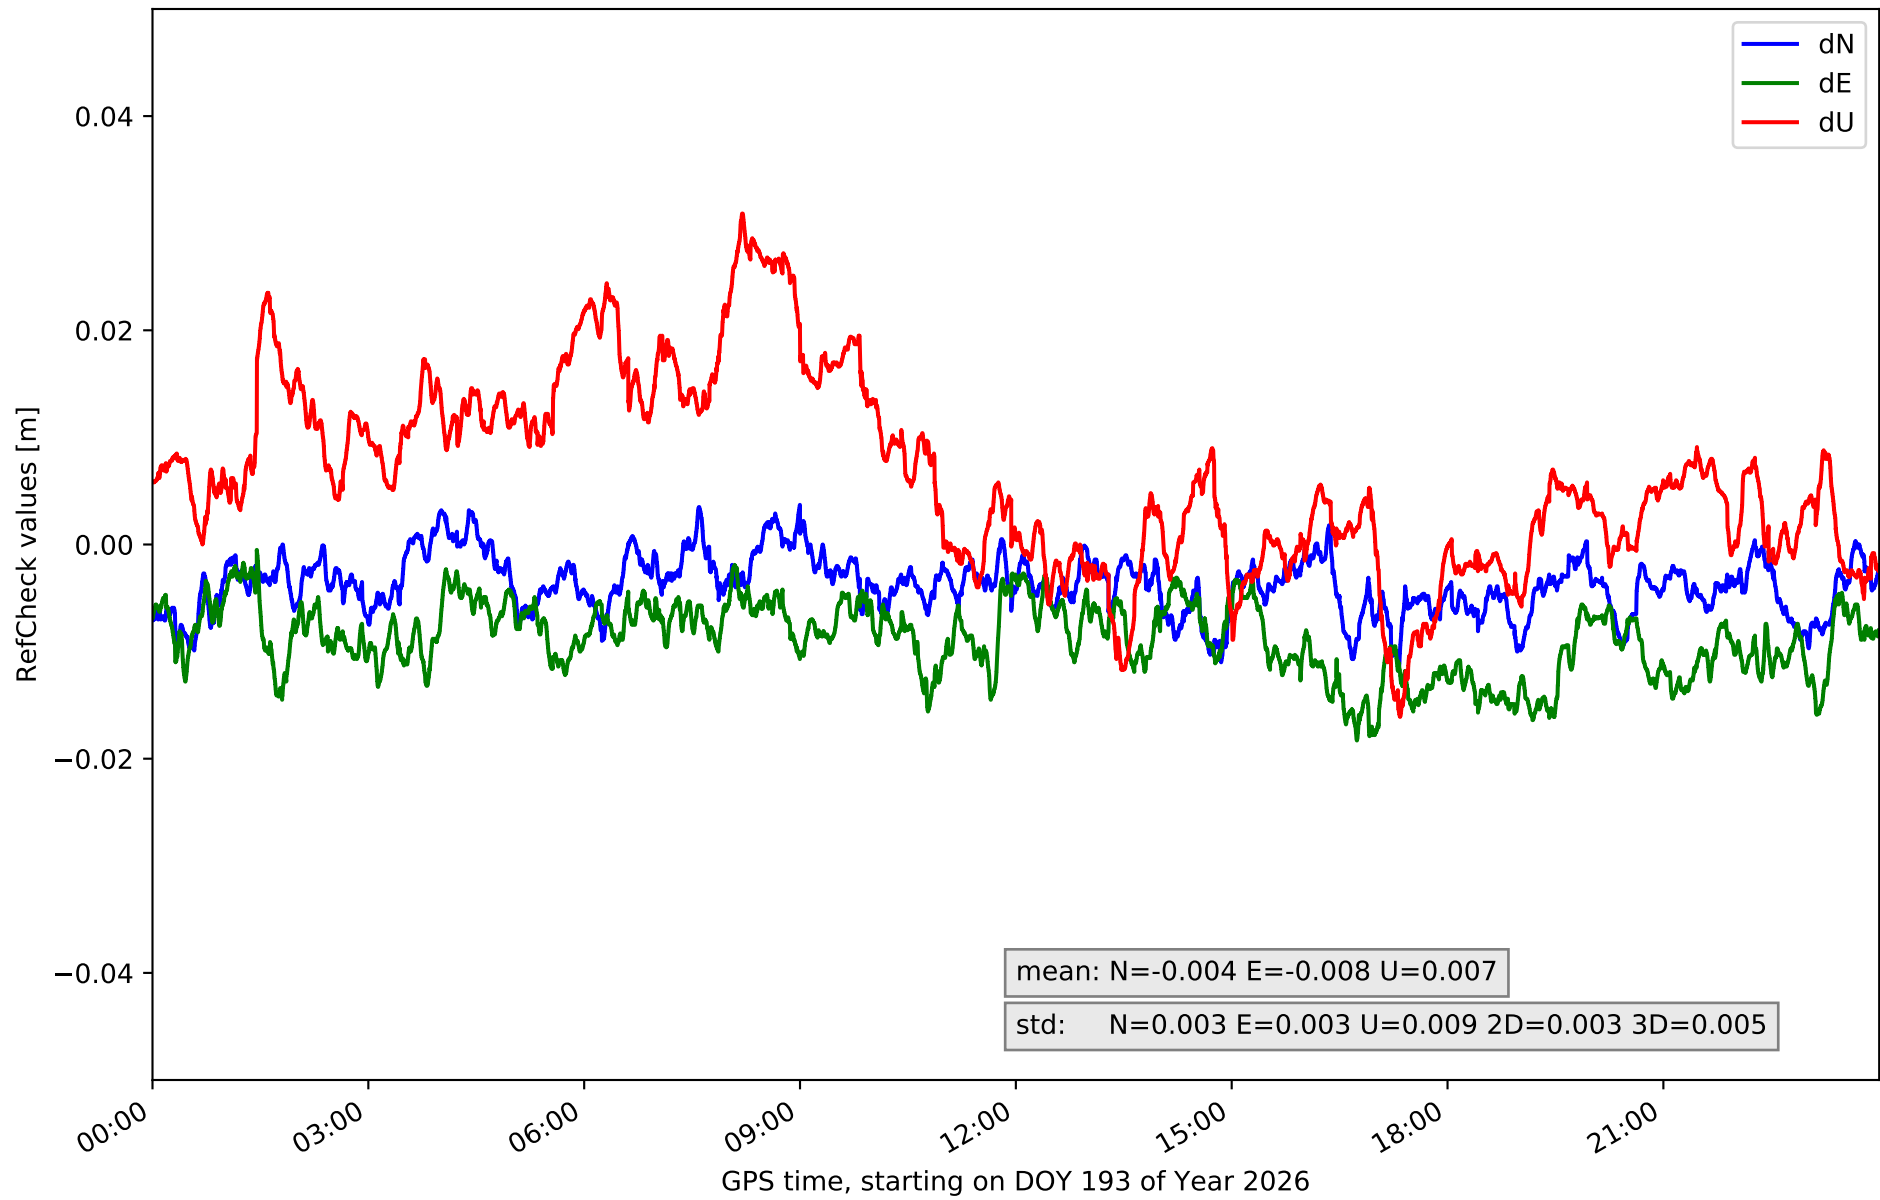


RefCheck for station TN03 in network NT32

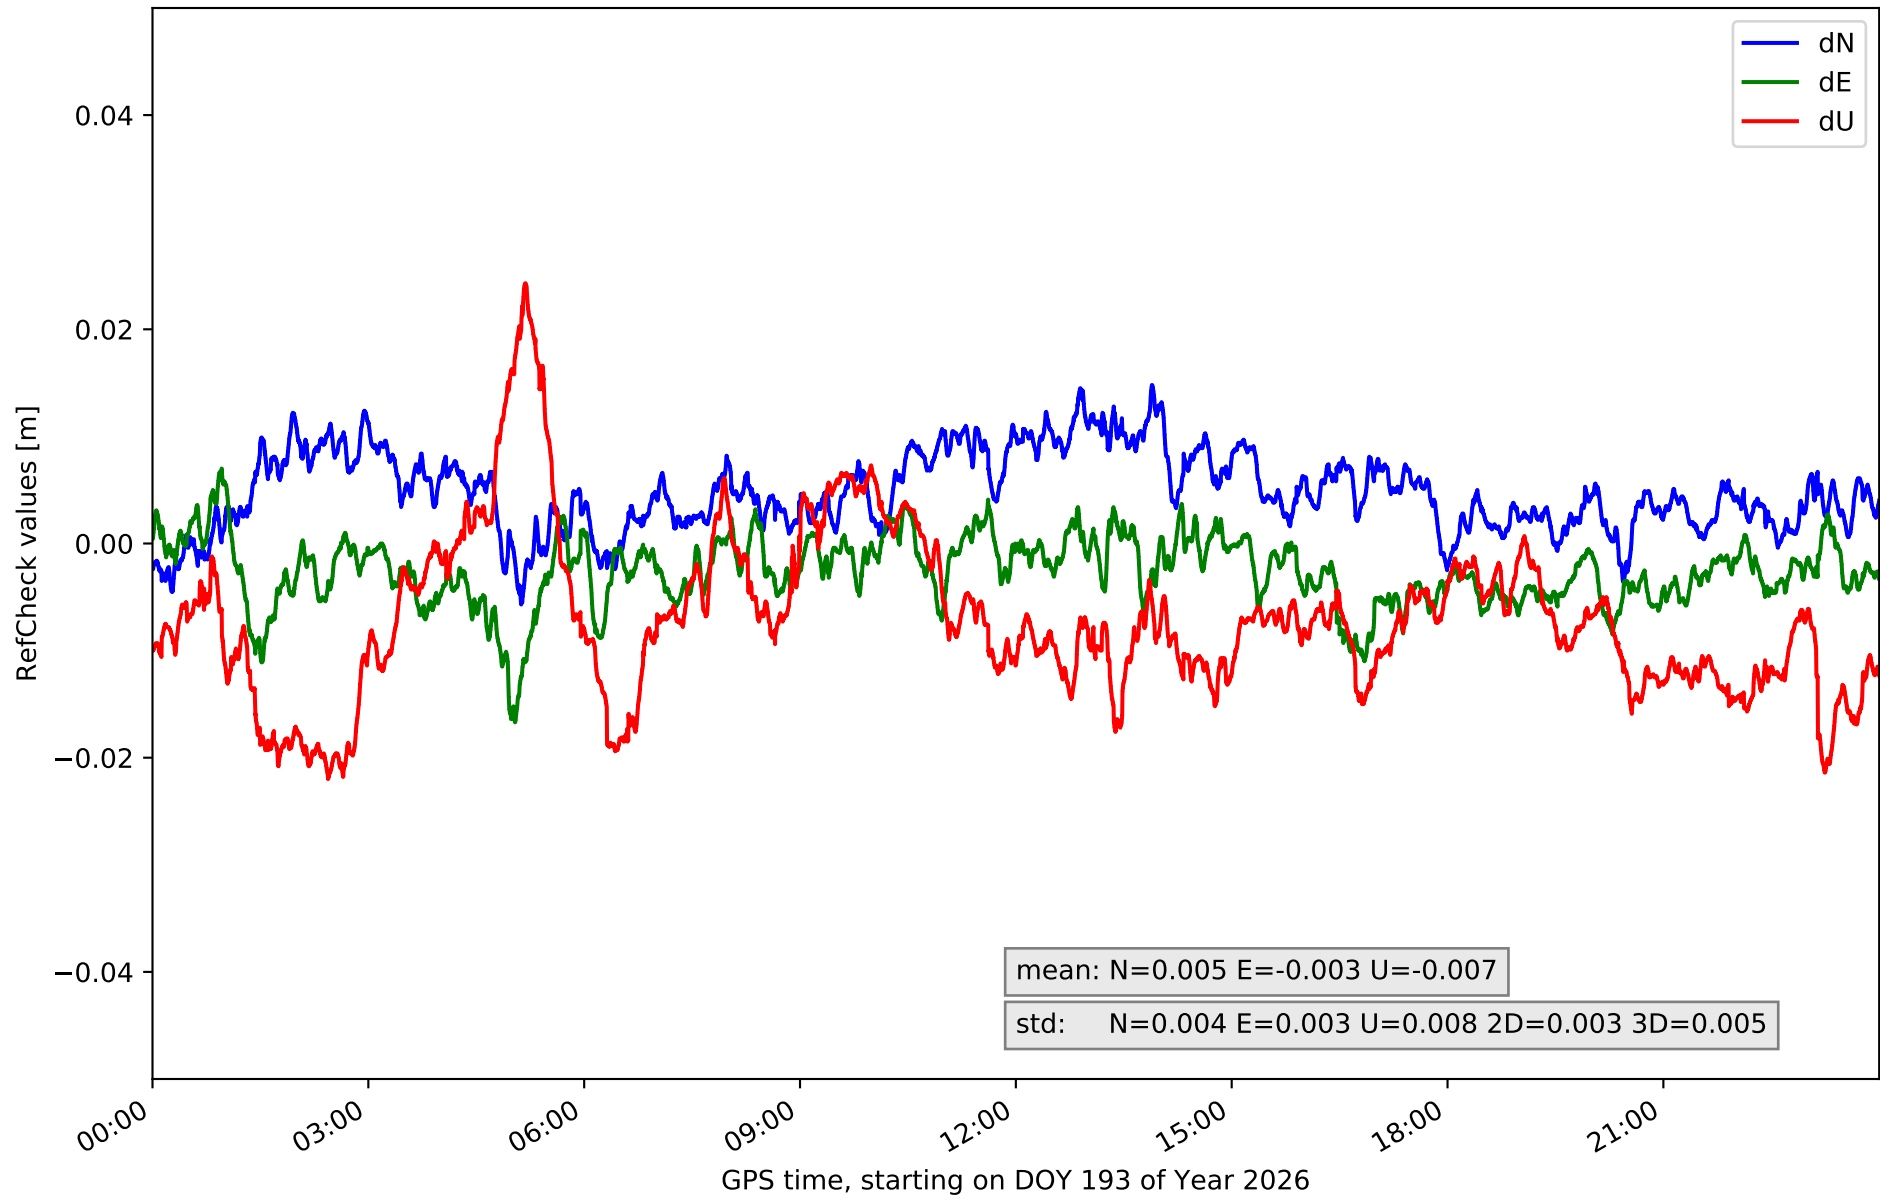


RefCheck for station TN06 in network NT32

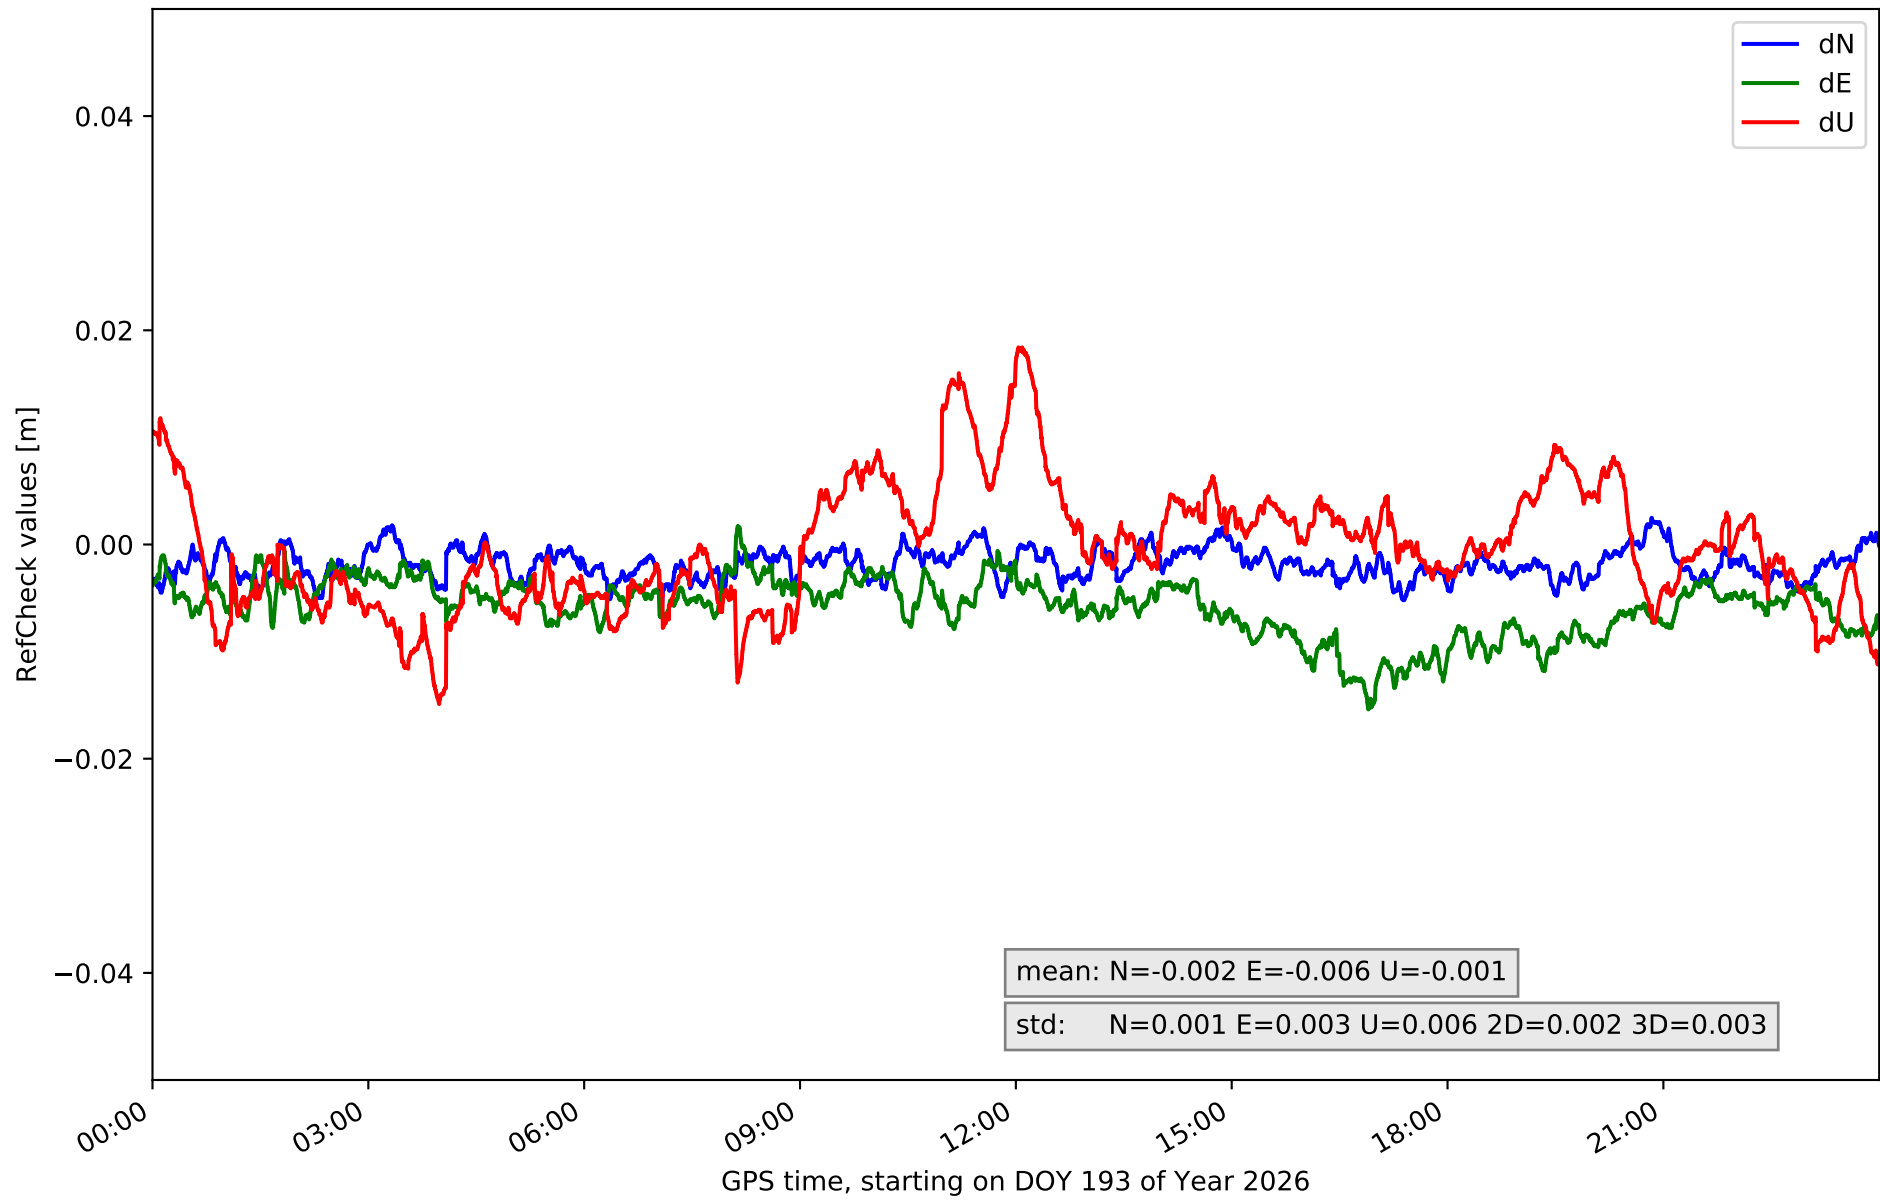

RefCheck for station TN09 in network NT32

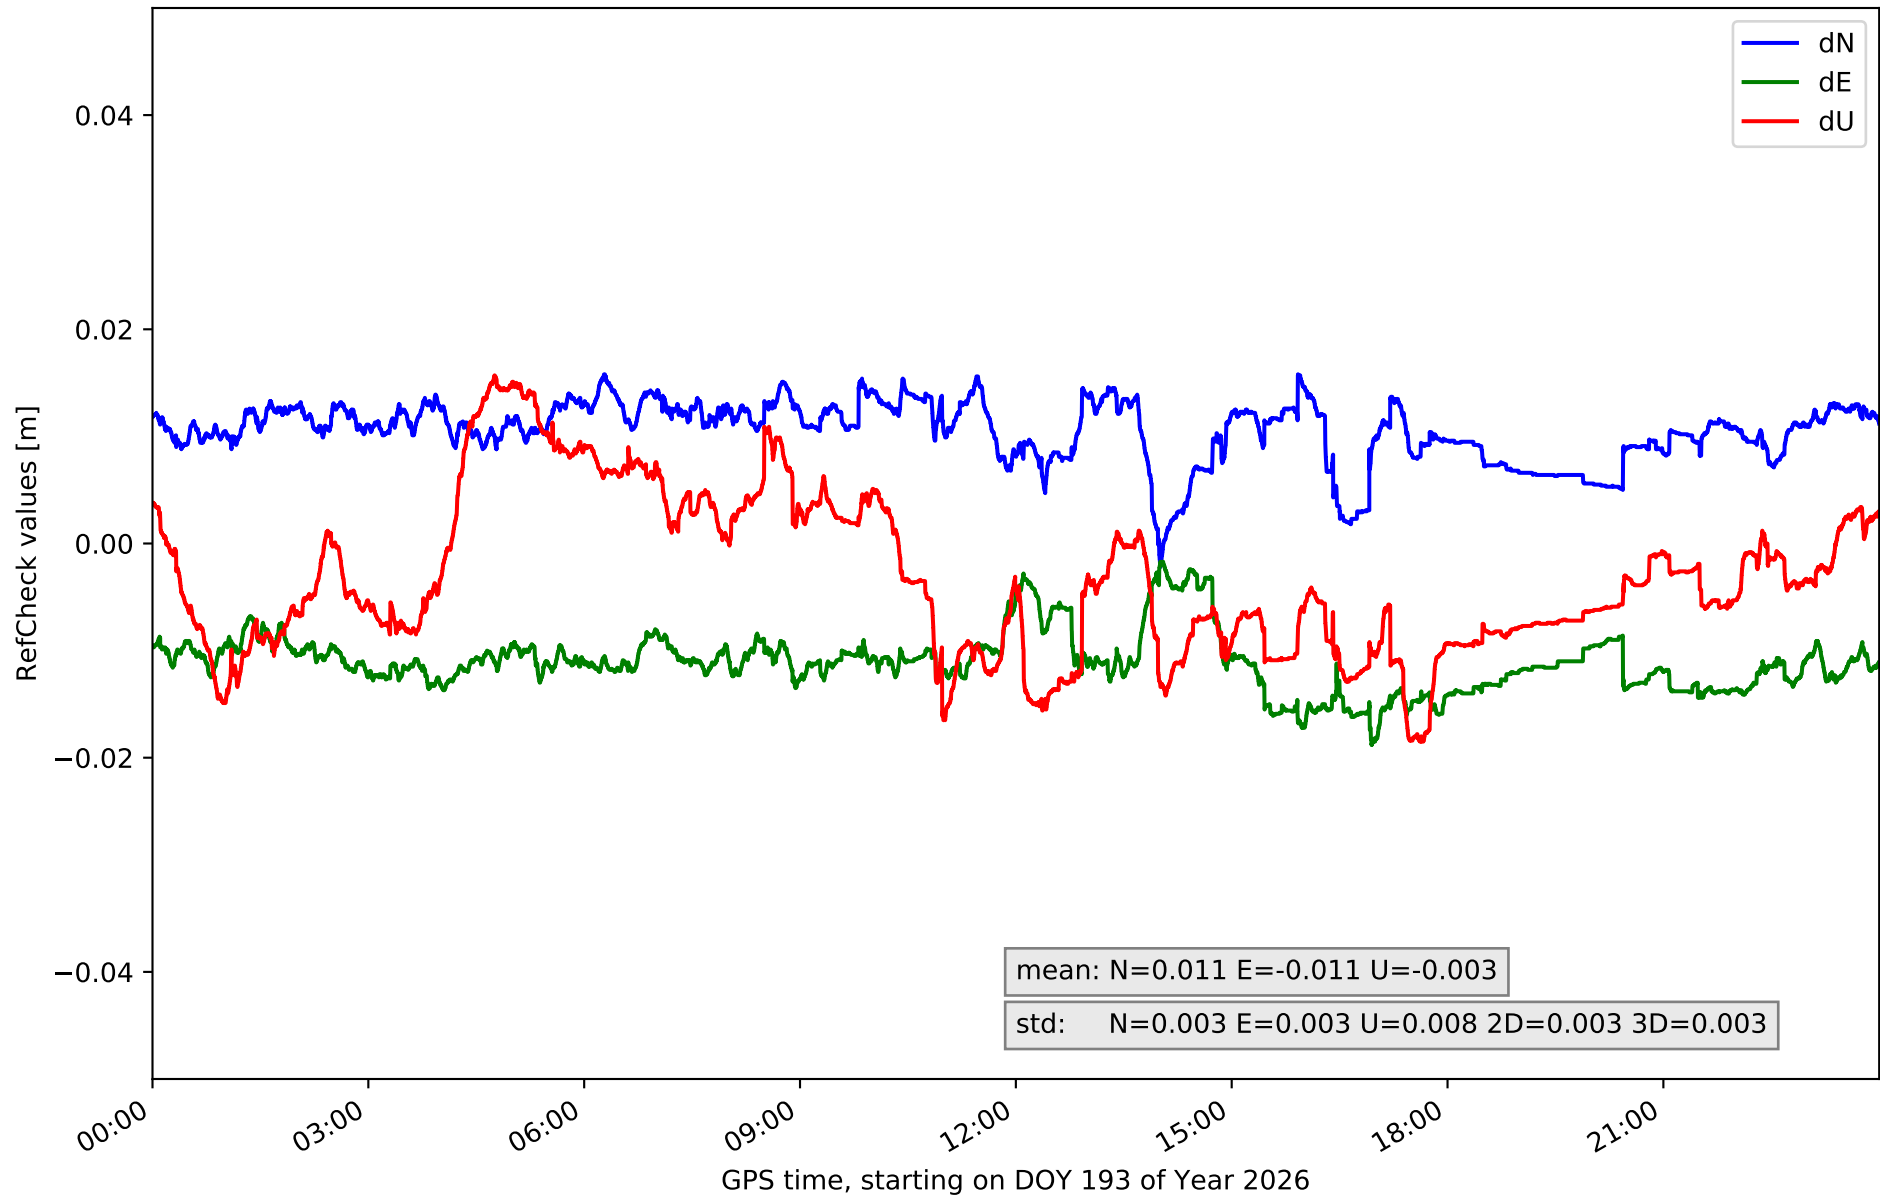

RefCheck for station TE11 in network NT32

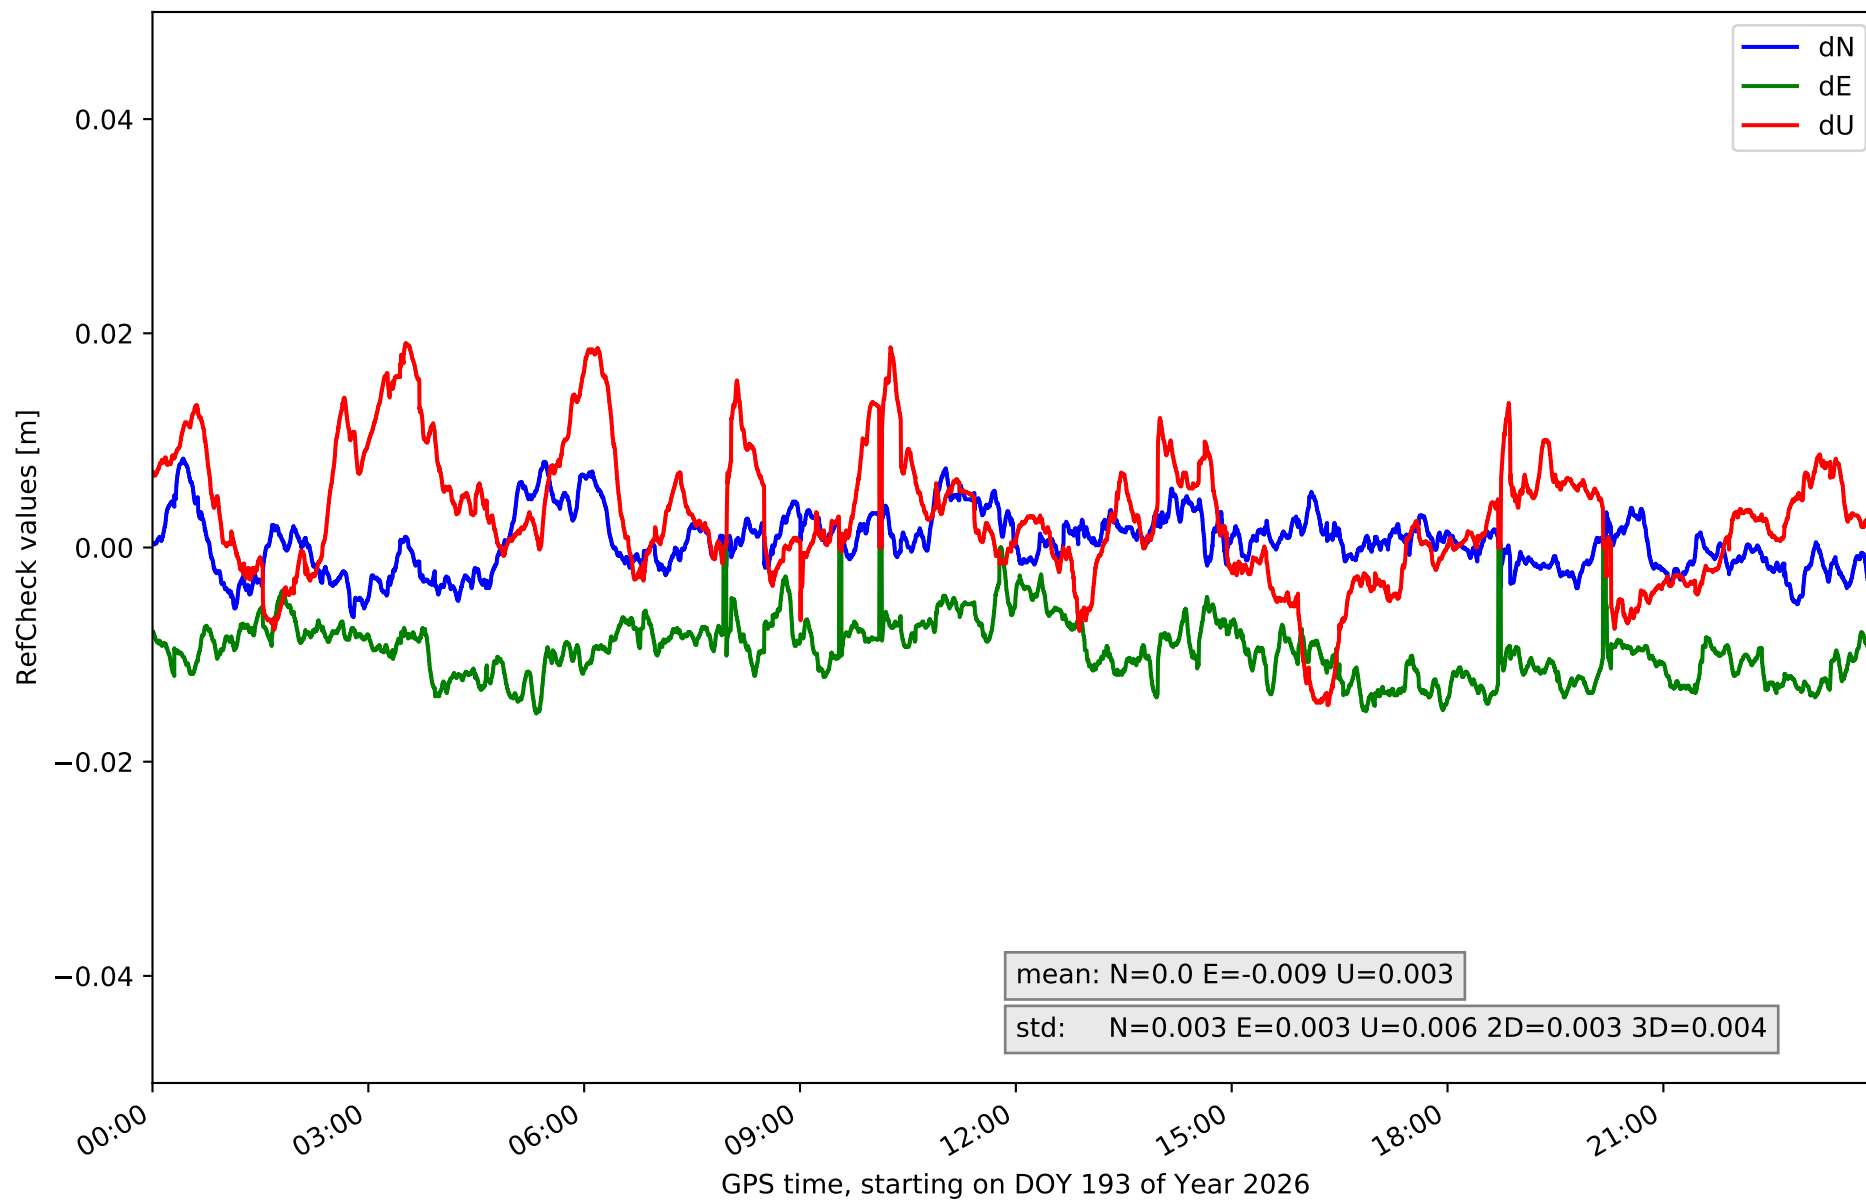

RefCheck values for network NT32

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.005	0.01	0.002	0.011	0.03	0.003	-0.007	0.023	0.006	0.003	0.004	67457	100.0	59828	88.7
EH02	-0.003	0.016	0.003	0.011	0.028	0.003	-0.022	0.01	0.006	0.002	0.003	67457	100.0	61039	90.5
GOM1	-0.013	0.024	0.006	-0.025	0.006	0.006	-0.06	0.06	0.015	0.005	0.01	45824	67.9	28910	42.9
GOME	-0.007	0.014	0.004	-0.012	0.026	0.006	-0.034	0.019	0.01	0.005	0.007	11589	17.2	7499	11.1
IZAN	-0.006	0.006	0.002	-0.017	0.001	0.003	-0.015	0.017	0.006	0.003	0.003	35913	53.2	594	0.9
LP01	-0.024	-0.006	0.003	-0.003	0.017	0.004	-0.002	0.033	0.006	0.004	0.005	66561	98.7	50908	75.5
LP03	-0.011	0.002	0.002	-0.004	0.013	0.003	-0.008	0.026	0.007	0.003	0.005	15515	23.0	5928	8.8
LPAL	-0.021	0.0	0.003	-0.0	0.018	0.002	-0.02	0.013	0.006	0.002	0.002	67328	99.8	36306	53.8
LRES	-0.001	0.014	0.002	-0.001	0.032	0.003	-0.017	0.015	0.006	0.003	0.003	67084	99.4	56797	84.2
TN01	-0.013	0.006	0.003	-0.024	-0.004	0.004	-0.024	0.017	0.008	0.004	0.005	64097	95.0	28400	42.1
TN02	-0.012	0.004	0.003	-0.018	-0.001	0.003	-0.016	0.031	0.009	0.003	0.005	27747	41.1	9263	13.7
TN03	-0.006	0.015	0.004	-0.017	0.007	0.003	-0.022	0.024	0.008	0.003	0.005	10908	16.2	6642	9.8
TN06	-0.006	0.003	0.001	-0.015	0.002	0.003	-0.015	0.018	0.006	0.002	0.003	5339	7.9	0	0.0
TN09	-0.002	0.016	0.003	-0.019	-0.002	0.003	-0.018	0.016	0.008	0.003	0.003	63716	94.5	9720	14.4
TE11	-0.006	0.008	0.003	-0.015	0.001	0.003	-0.015	0.019	0.006	0.003	0.004	31656	46.9	1242	1.8
Mean	-0.009	0.009	0.003	-0.01	0.012	0.003	-0.02	0.023	0.008	0.003	0.004	43212.7	64.1	24205.1	35.9
Min/Max	-0.024	0.024	0.006	-0.025	0.032	0.006	-0.06	0.06	0.015	0.005	0.01	67457	100.0	61039	90.5

fixing statistic for network NT32

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	95.2	95.4	94.2	95.8	94.8
considering satellites with dual-frequency fixed	93.5	93.8	92.2	94.4	93.1
considering all signals separately	93.7	93.8	92.2	94.8	92.7